


Test Mode: UnII-2C/TX AC80 Mode 5610MHz+ VESA Docking

Horizontal

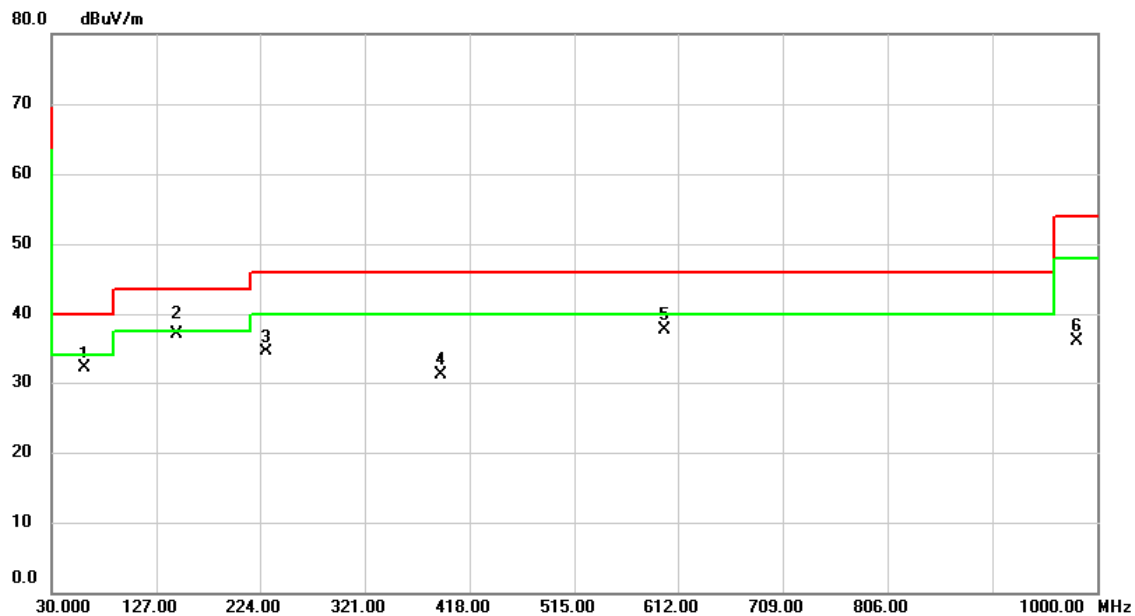

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		59.9406	40.71	-8.69	32.02	40.00	-7.98	peak	
2	*	146.2383	45.58	-8.55	37.03	43.50	-6.47	QP	
3		230.0786	44.82	-10.36	34.46	46.00	-11.54	peak	
4		391.3250	36.07	-5.06	31.01	46.00	-14.99	peak	
5		600.0043	38.35	-0.63	37.72	46.00	-8.28	peak	
6		981.8933	30.67	5.49	36.16	54.00	-17.84	peak	


APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode UNII-1/ TX A Mode 5180MHz

Polarization

Vertical


Orthogonal Axis: Z

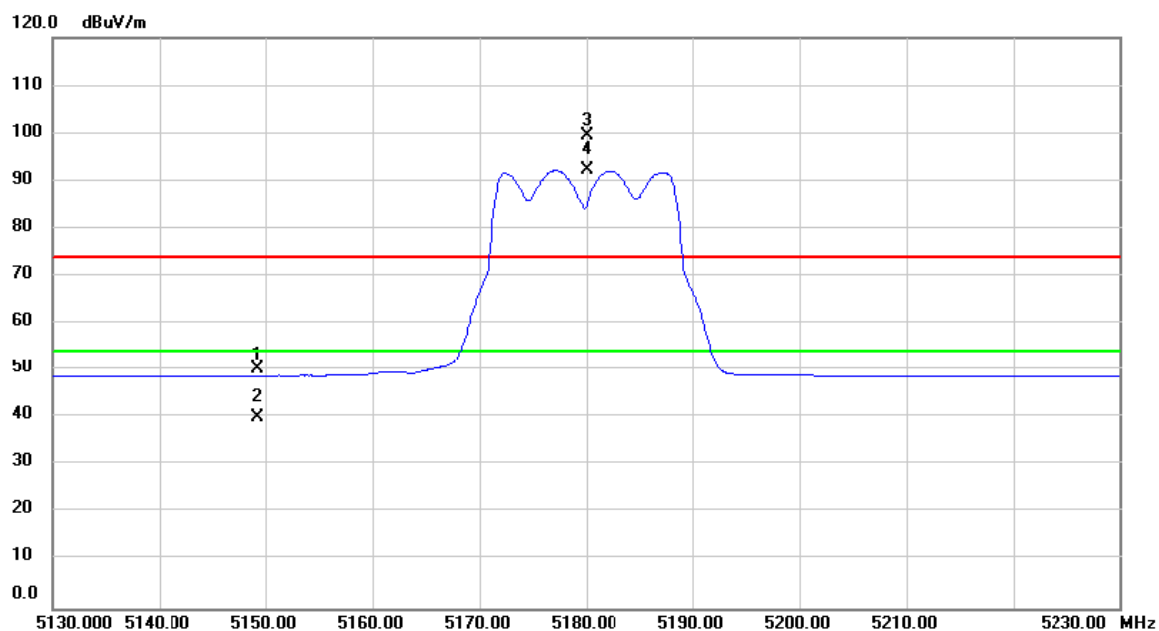

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5149.280	12.64	37.54	50.18	74.00	-23.82	peak	
2		5149.280	2.43	37.54	39.97	54.00	-14.03	AVG	
3	X	5180.000	61.94	37.58	99.52	74.00	25.52	peak	No Limit
4	*	5180.000	54.61	37.58	92.19	54.00	38.19	AVG	No Limit

Test Mode	UNII-1/ TX A Mode 5180MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: Z

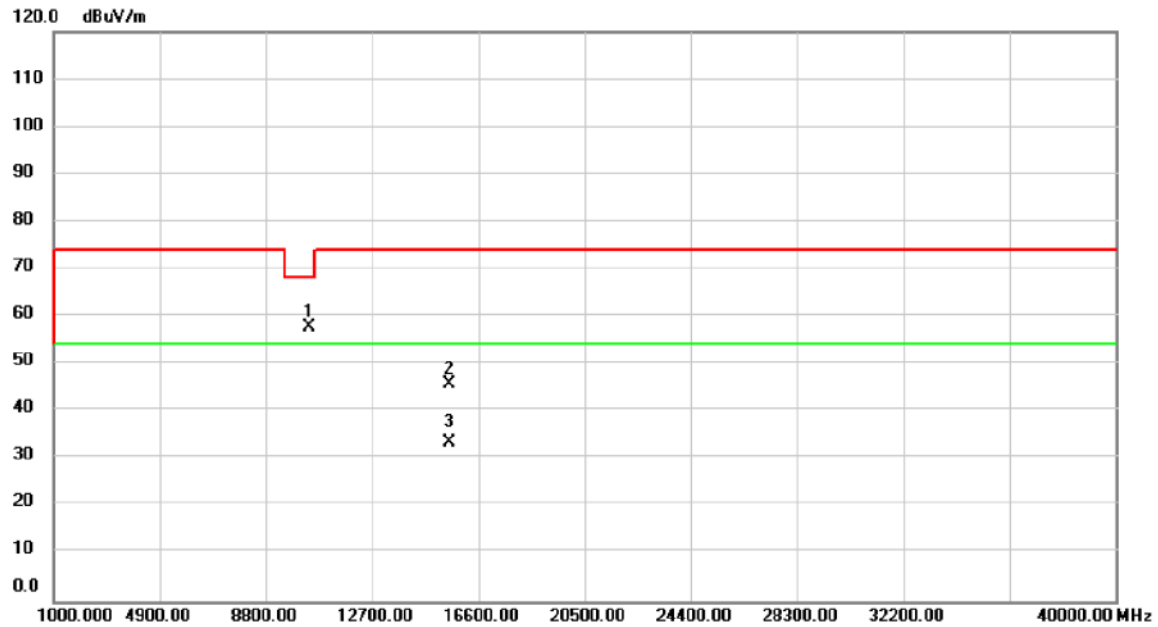

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	55.86	1.92	57.78	68.20	-10.42	peak	
2		15540.00	40.59	5.20	45.79	74.00	-28.21	peak	
3		15540.00	28.24	5.20	33.44	54.00	-20.56	AVG	

Test Mode	UNII-1/ TX A Mode 5180MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------


Orthogonal Axis: Z

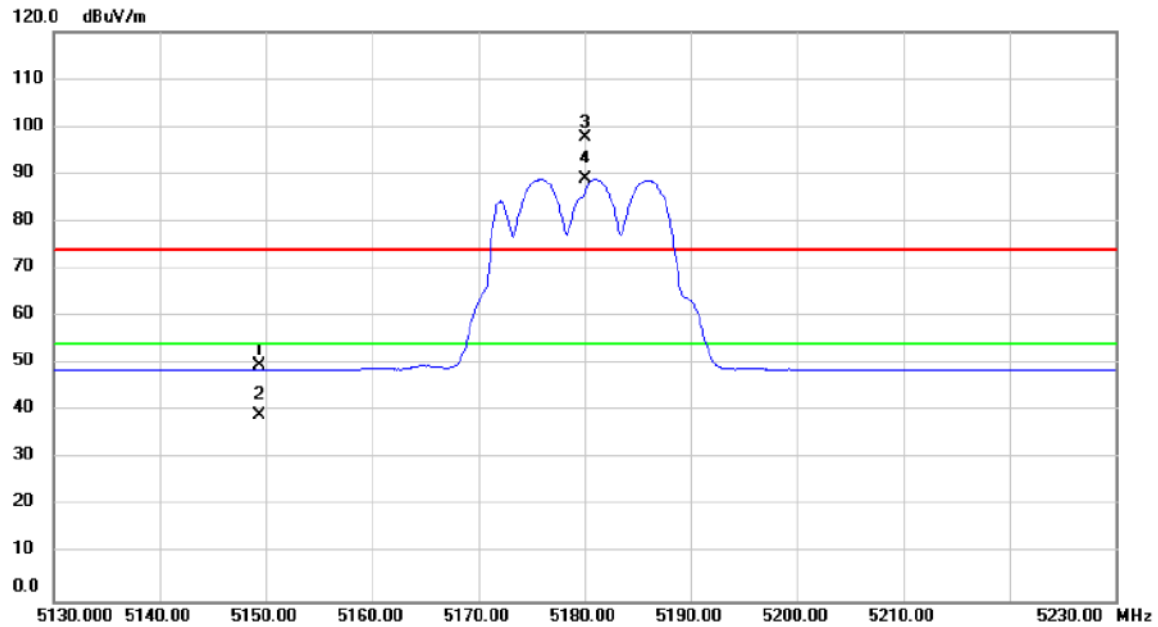

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5149.400	12.03	37.54	49.57	74.00	-24.43	peak	
2		5149.400	1.75	37.54	39.29	54.00	-14.71	AVG	
3	X	5180.000	59.94	37.58	97.52	74.00	23.52	peak	No Limit
4	*	5180.000	51.42	37.58	89.00	54.00	35.00	AVG	No Limit

Test Mode	UNII-1/ TX A Mode 5180MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------


Orthogonal Axis: Z

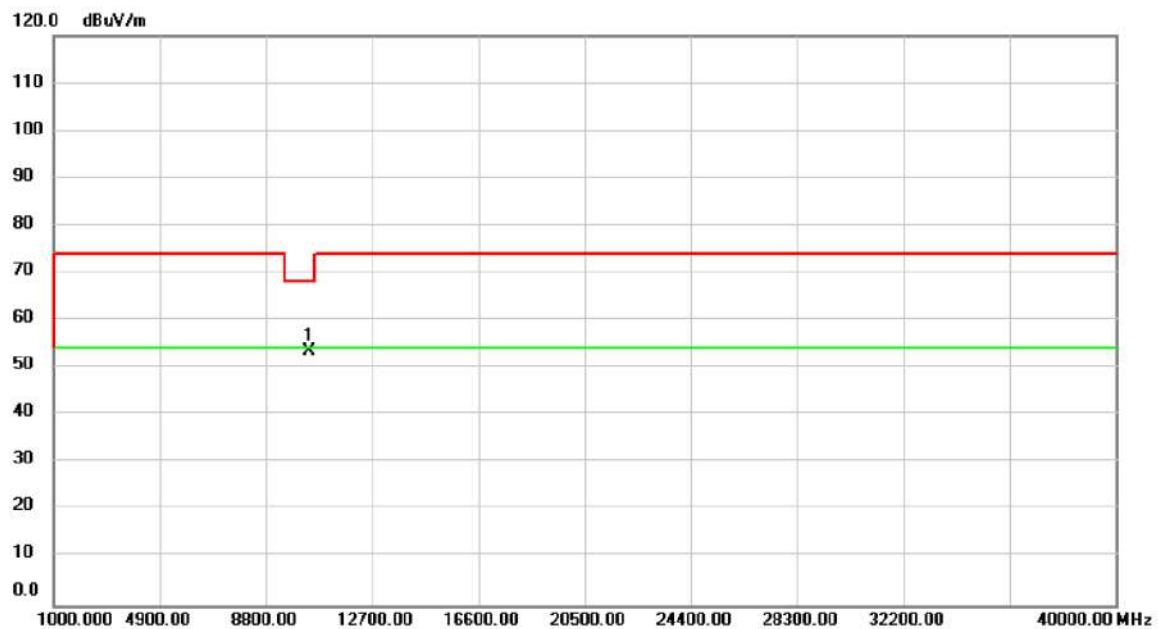

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	51.67	1.92	53.59	68.20	-14.61	peak	

Test Mode	UNII-1/ TX A Mode 5200MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: Z

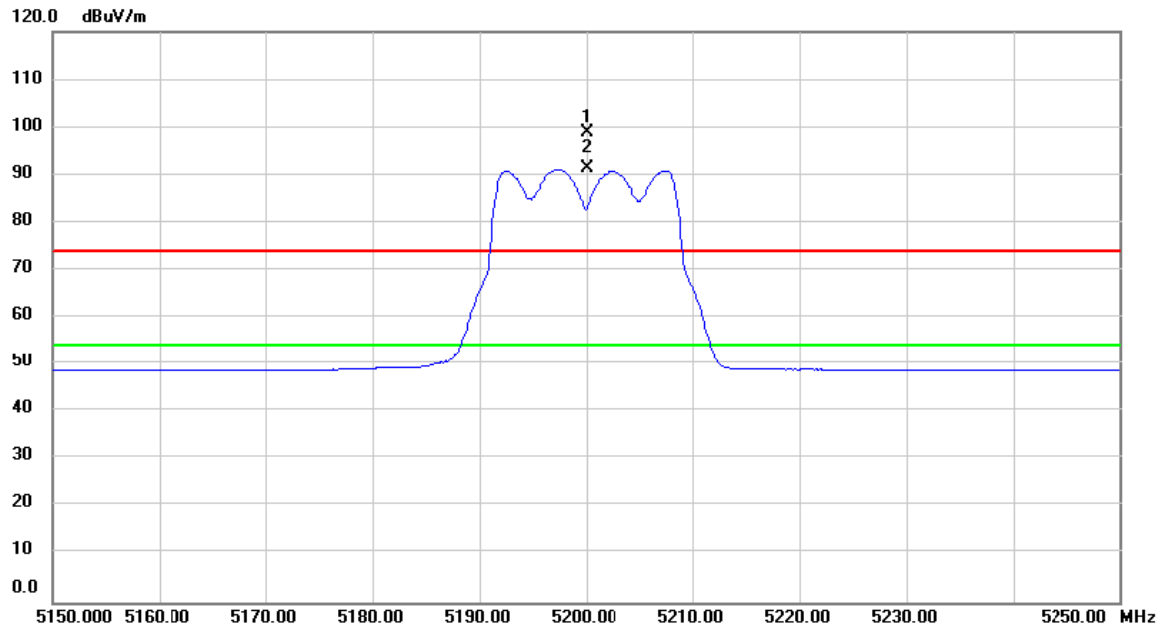

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5200.000	61.24	37.60	98.84	74.00	24.84	peak	No Limit
2	*	5200.000	53.63	37.60	91.23	54.00	37.23	AVG	No Limit

Test Mode	UNII-1/ TX A Mode 5200MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: Z

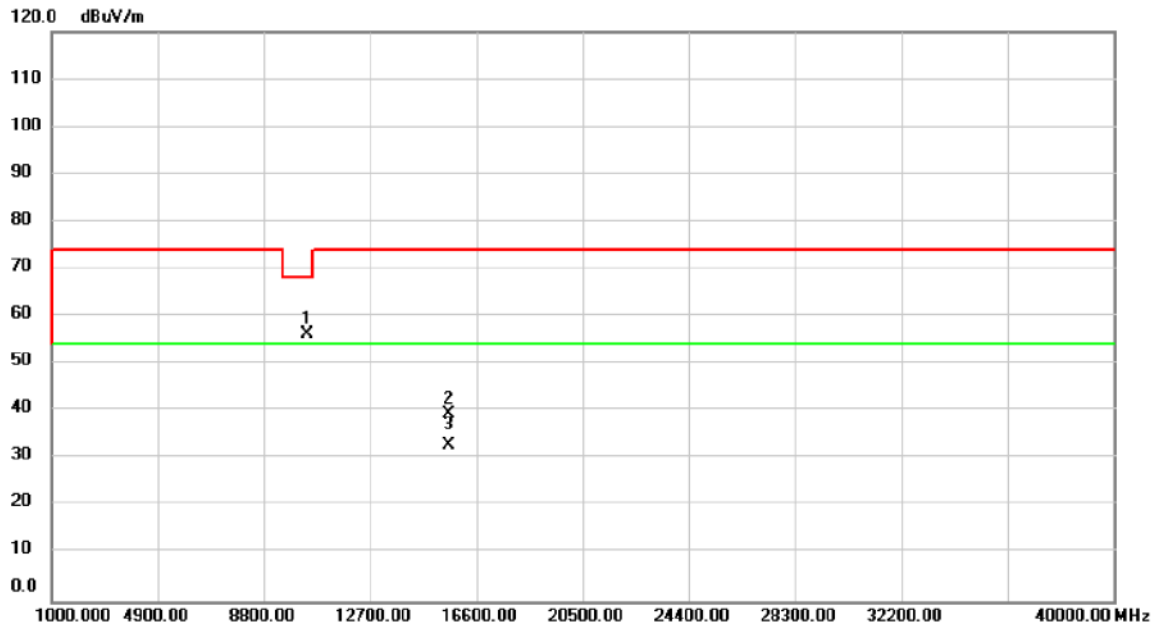

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	53.01	3.30	56.31	68.20	-11.89	peak	
2		15600.00	32.52	7.04	39.56	74.00	-34.44	peak	
3		15600.00	25.66	7.04	32.70	54.00	-21.30	AVG	

Test Mode	UNII-1/ TX A Mode 5200MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------


Orthogonal Axis: Z

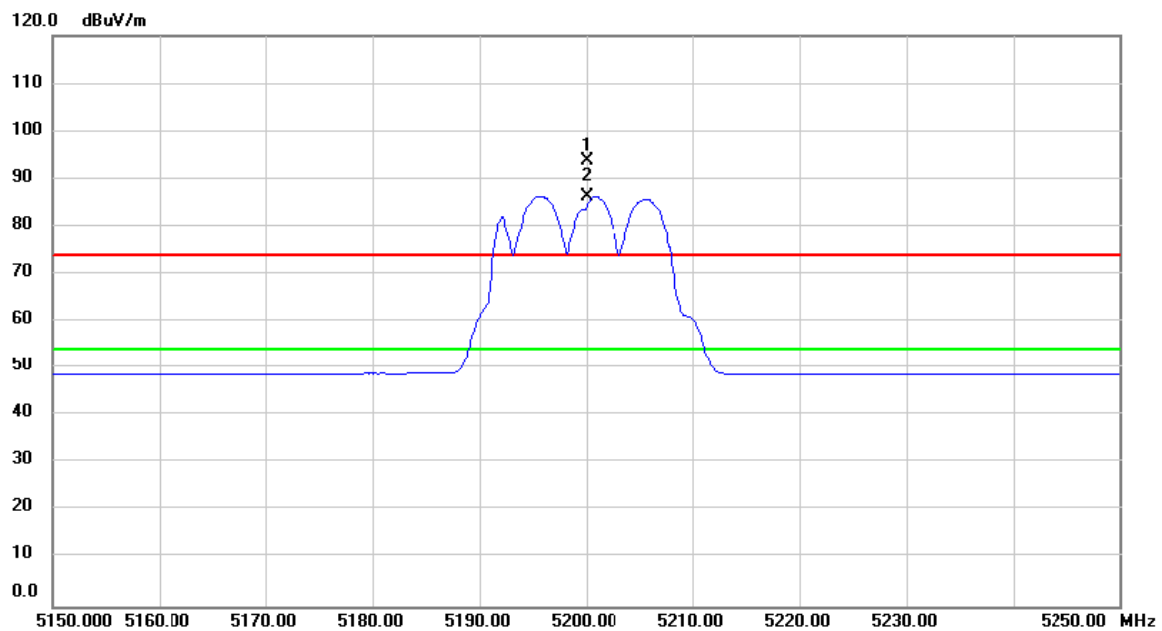

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5200.000	56.01	37.60	93.61	74.00	19.61	peak	No Limit
2	*	5200.000	48.77	37.60	86.37	54.00	32.37	AVG	No Limit

Test Mode	UNII-1/ TX A Mode 5200MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------


Orthogonal Axis: Z

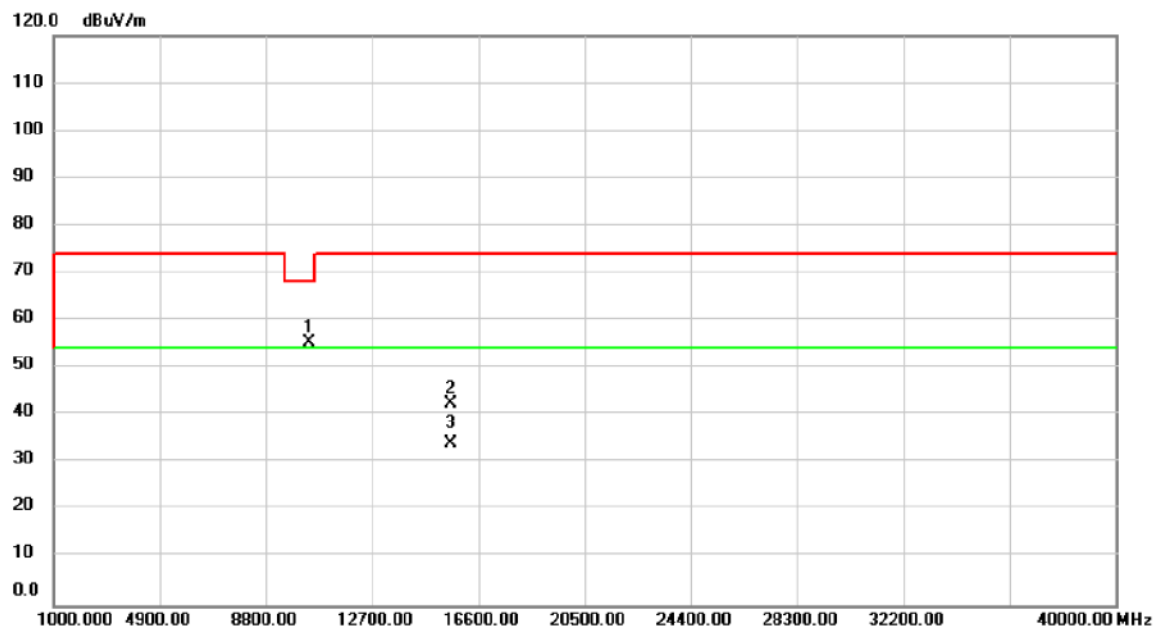

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	52.07	3.30	55.37	68.20	-12.83	peak	
2		15600.00	35.37	7.04	42.41	74.00	-31.59	peak	
3		15600.00	26.95	7.04	33.99	54.00	-20.01	AVG	

Test Mode	UNII-1/ TX A Mode 5240MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: Z

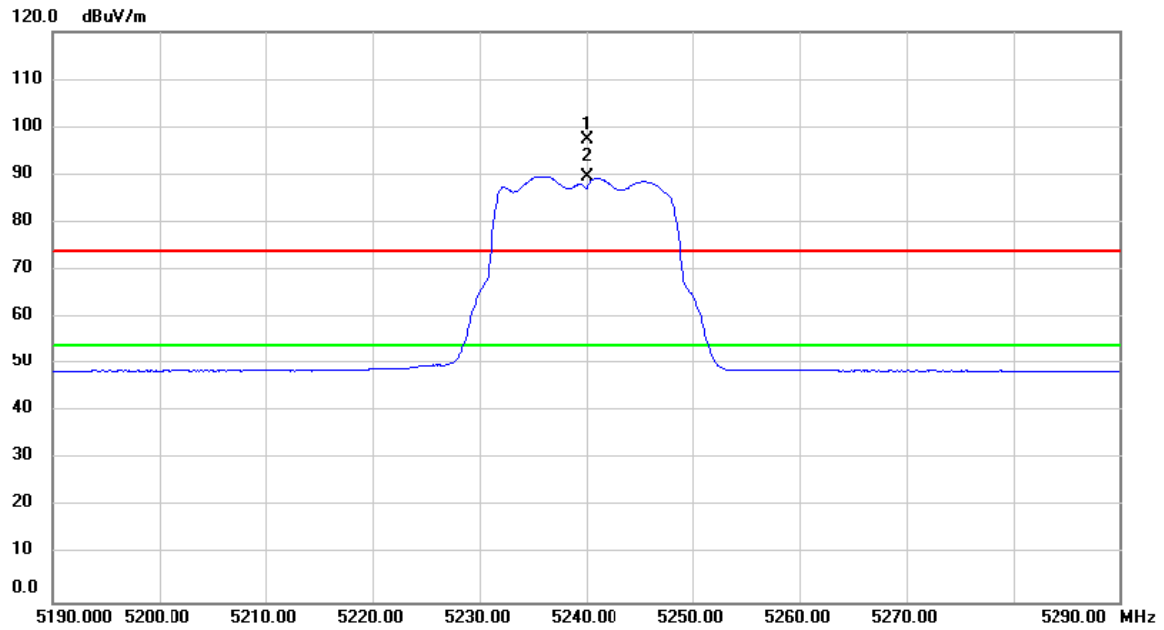

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5240.000	59.81	37.64	97.45	74.00	23.45	peak	No Limit
2	*	5240.000	52.05	37.64	89.69	54.00	35.69	AVG	No Limit

Test Mode	UNII-1/ TX A Mode 5240MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: Z

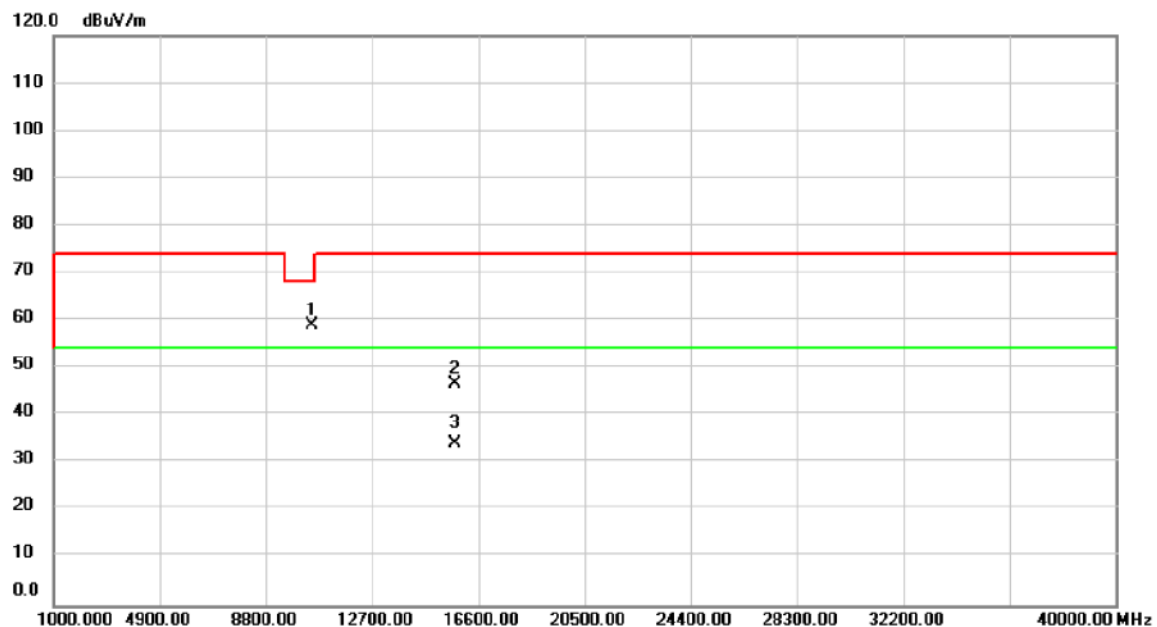

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	55.59	3.30	58.89	68.20	-9.31	peak	
2		15720.00	39.74	6.89	46.63	74.00	-27.37	peak	
3		15720.00	27.23	6.89	34.12	54.00	-19.88	AVG	

Test Mode	UNII-1/ TX A Mode 5240MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------


Orthogonal Axis: Z

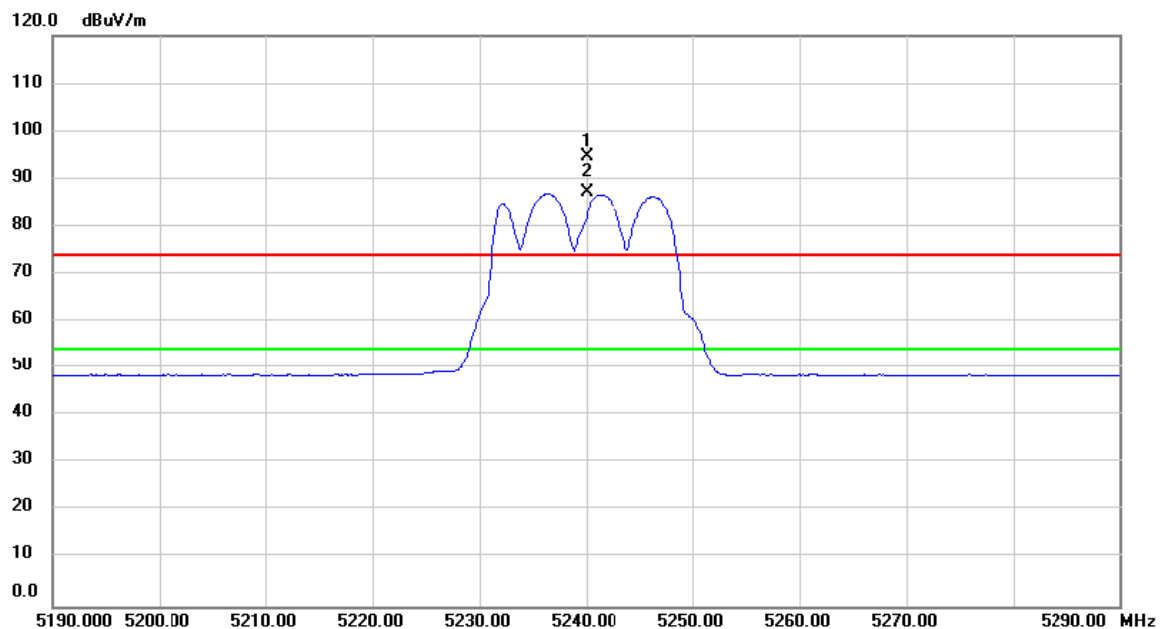

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.000	56.89	37.64	94.53	74.00	20.53	peak	No Limit
2	*	5240.000	49.45	37.64	87.09	54.00	33.09	AVG	No Limit

Test Mode	UNII-1/ TX A Mode 5240MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------


Orthogonal Axis: Z

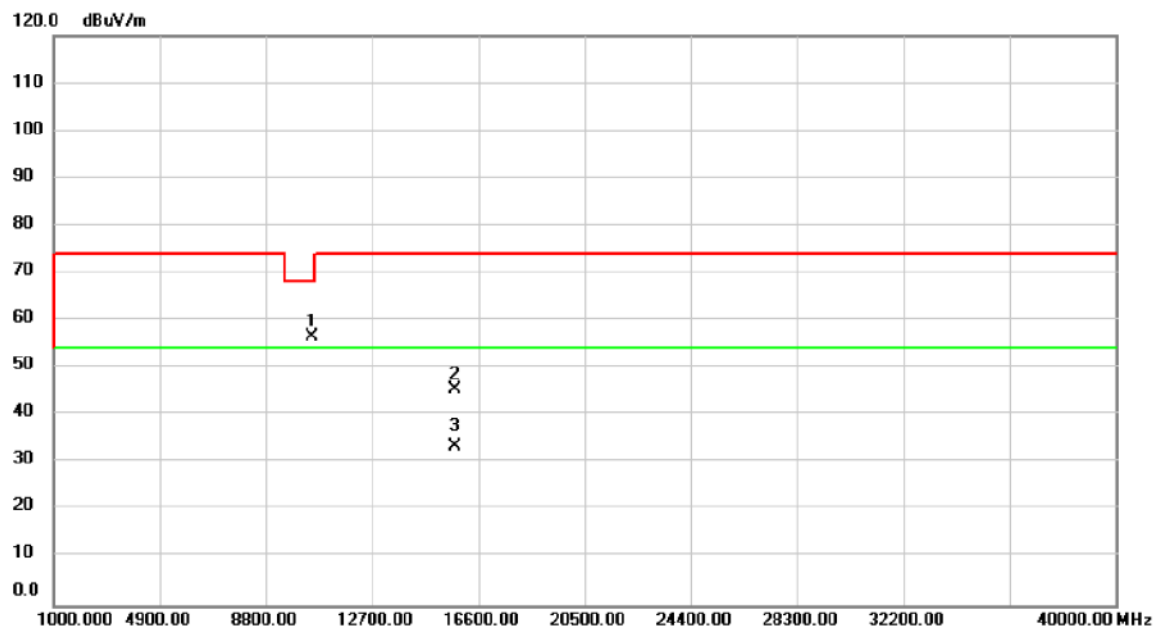

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	53.39	3.30	56.69	68.20	-11.51	peak	
2		15720.00	38.52	6.89	45.41	74.00	-28.59	peak	
3		15720.00	26.66	6.89	33.55	54.00	-20.45	AVG	

Test Mode	UNII-1/ TX N20 Mode 5180MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: Z

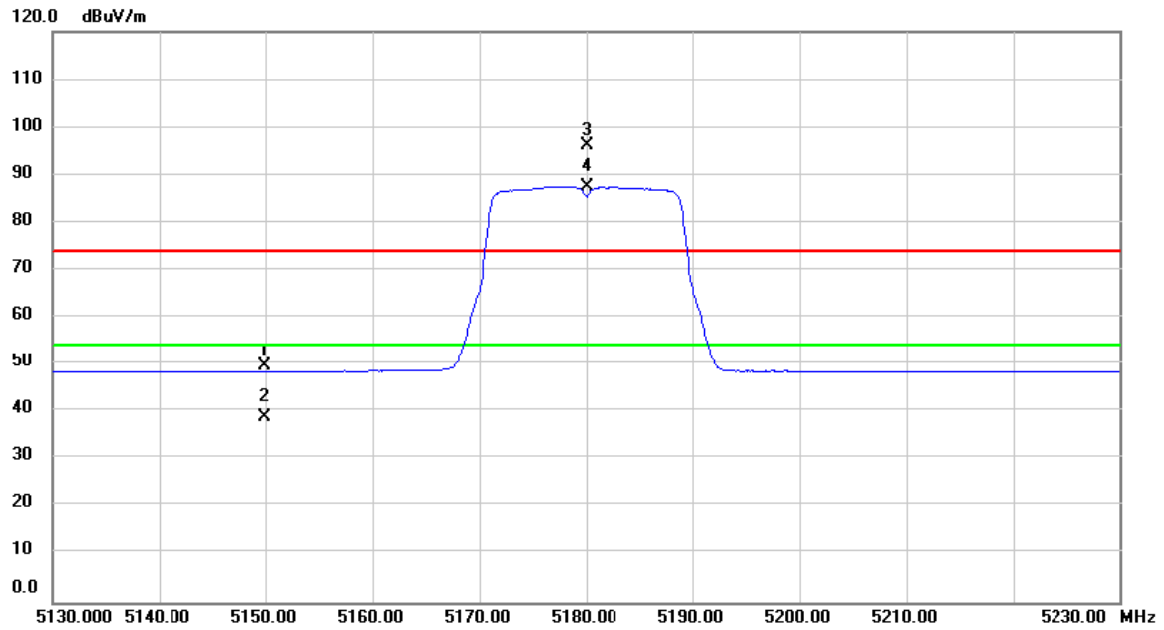

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5149.940	12.24	37.54	49.78	74.00	-24.22	peak	
2		5149.940	1.43	37.54	38.97	54.00	-15.03	AVG	
3	X	5180.000	58.62	37.58	96.20	74.00	22.20	peak	No Limit
4	*	5180.000	49.92	37.58	87.50	54.00	33.50	AVG	No Limit

Test Mode	UNII-1/ TX N20 Mode 5180MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------

Orthogonal Axis: Z

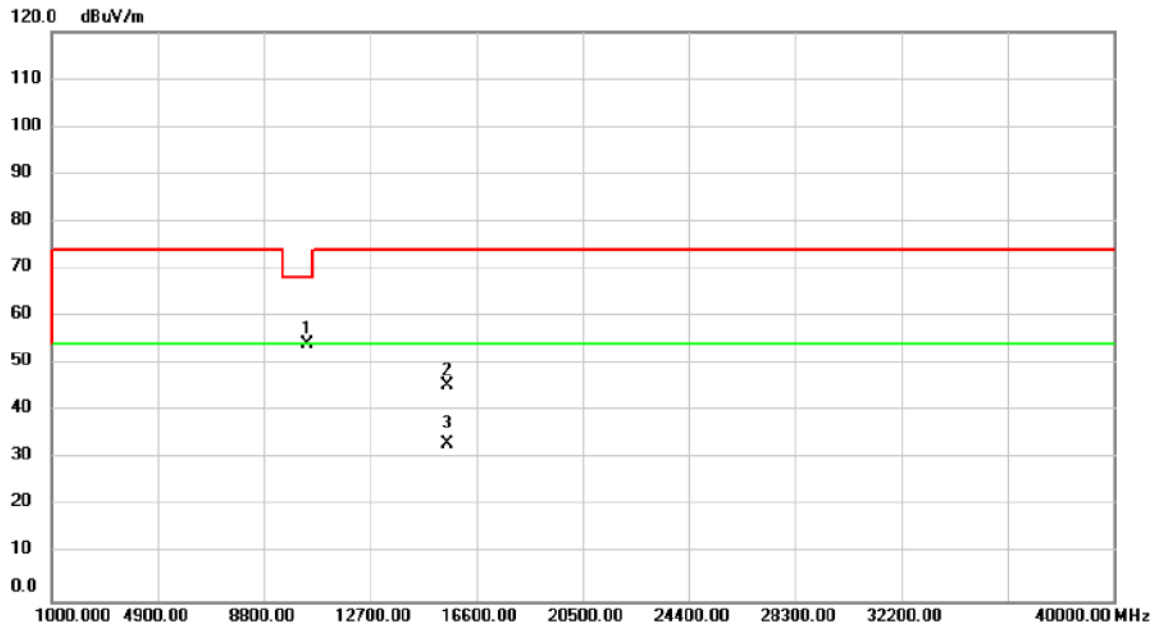


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	50.89	3.28	54.17	68.20	-14.03	peak	
2		15540.00	38.40	7.11	45.51	74.00	-28.49	peak	
3		15540.00	25.98	7.11	33.09	54.00	-20.91	AVG	

Test Mode UNII-1/ TX N20 Mode 5180MHz

Polarization

Horizontal


Orthogonal Axis: Z

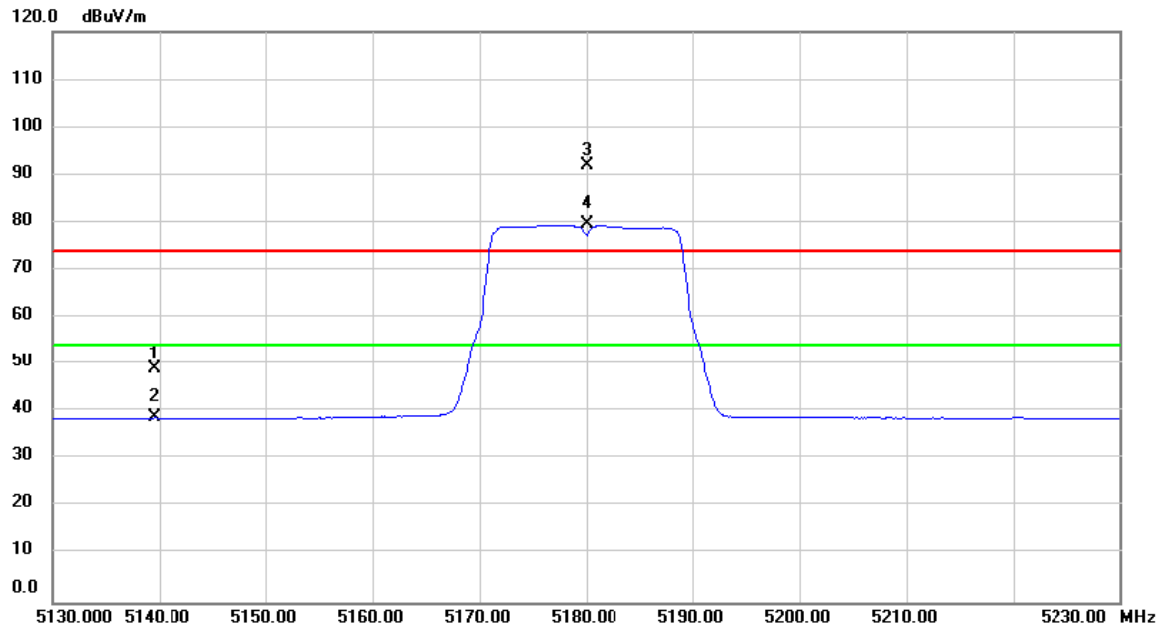

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5139.580	11.50	37.53	49.03	74.00	-24.97	peak	
2		5139.580	1.29	37.53	38.82	54.00	-15.18	AVG	
3	X	5180.000	54.27	37.58	91.85	74.00	17.85	peak	No Limit
4	*	5180.000	42.10	37.58	79.68	54.00	25.68	AVG	No Limit

Test Mode	UNII-1/ TX N20 Mode 5180MHz	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: Z

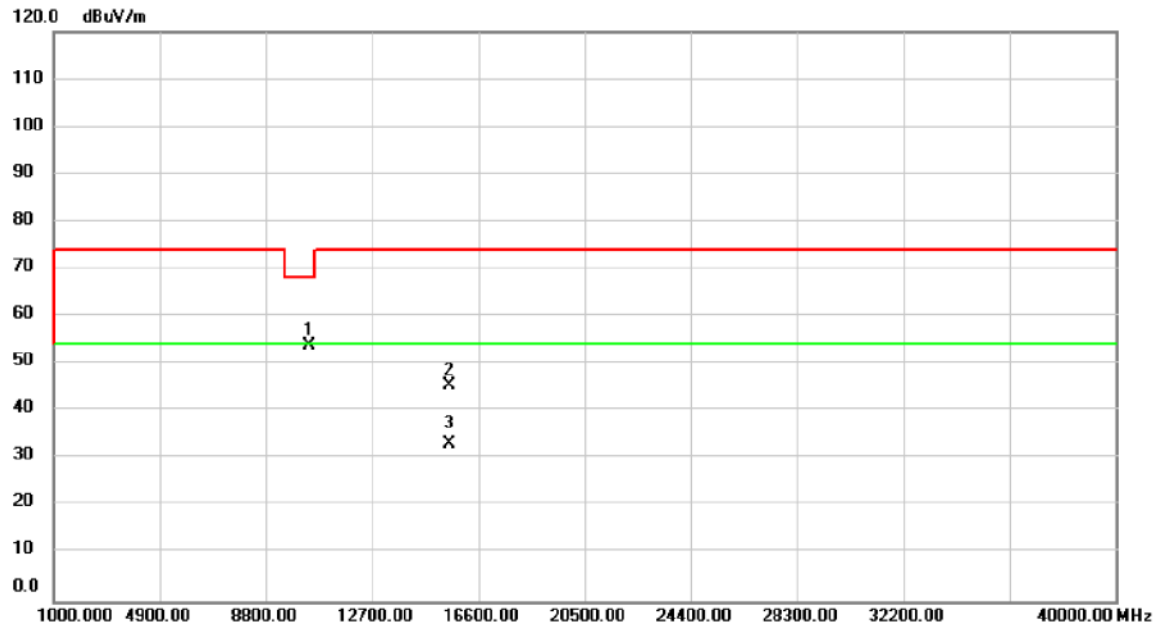

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	50.49	3.28	53.77	68.20	-14.43	peak	
2		15540.00	38.40	7.11	45.51	74.00	-28.49	peak	
3		15545.00	26.08	7.11	33.19	54.00	-20.81	AVG	

Test Mode	UNII-1/ TX N20 Mode 5200MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: Z

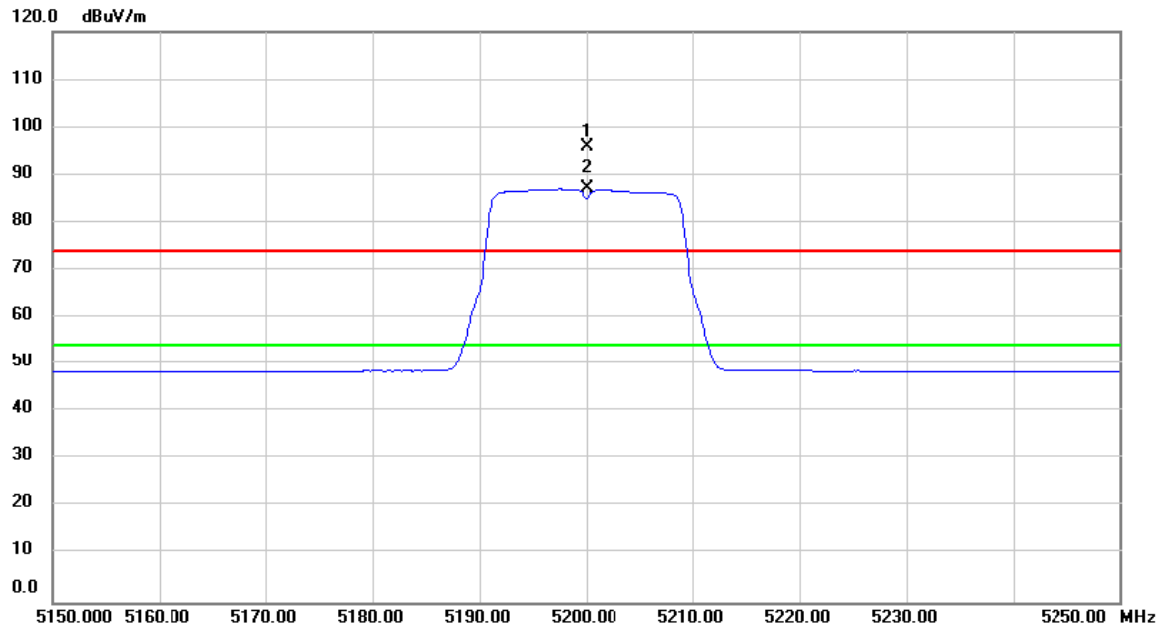

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5200.000	58.16	37.60	95.76	74.00	21.76	peak	No Limit
2	*	5200.000	49.43	37.60	87.03	54.00	33.03	AVG	No Limit

Test Mode	UNII-1/ TX N20 Mode 5200MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: Z

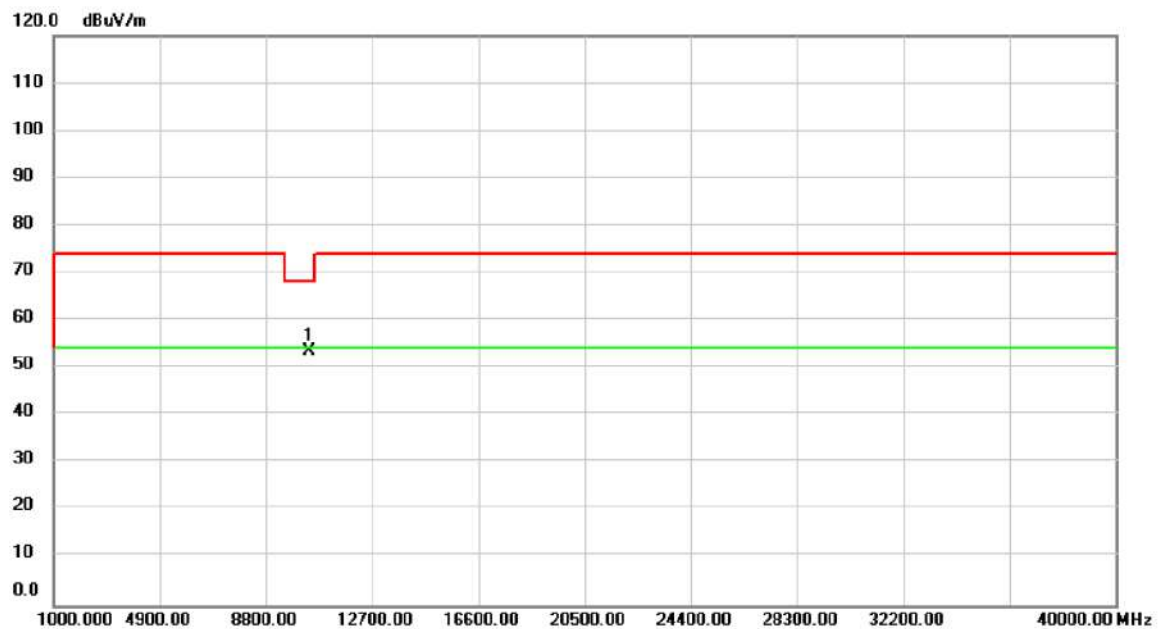

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	50.15	3.30	53.45	68.20	-14.75	peak	

Test Mode	UNII-1/ TX N20 Mode 5200MHz	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: Z

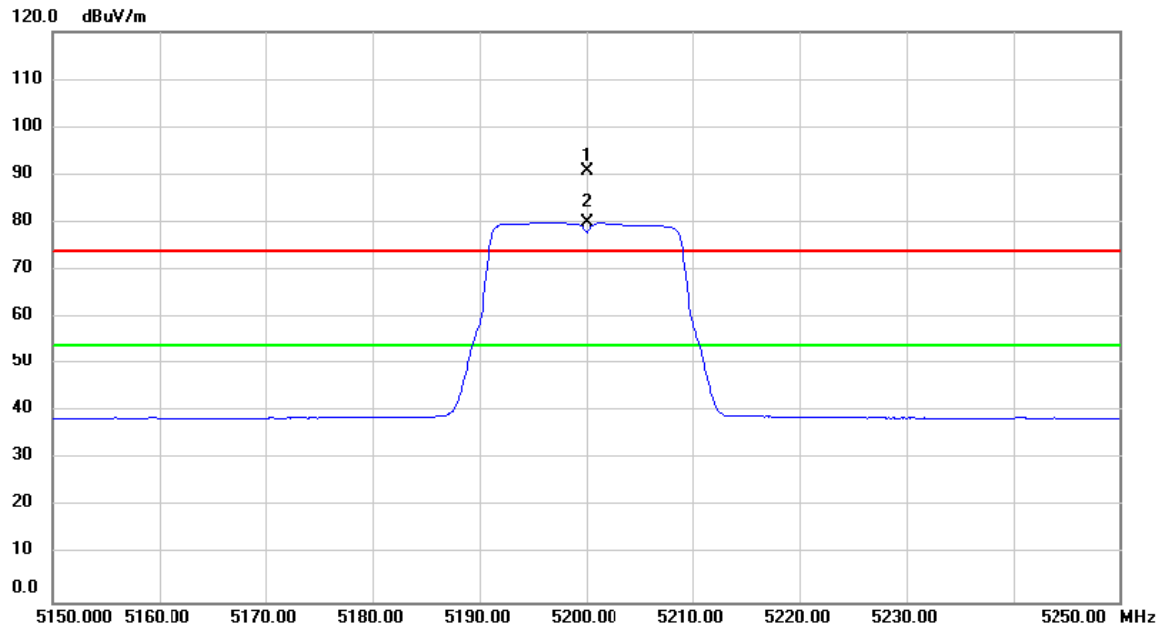

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5200.000	53.13	37.60	90.73	74.00	16.73	peak	No Limit
2	*	5200.000	42.46	37.60	80.06	54.00	26.06	AVG	No Limit

Test Mode	UNII-1/ TX N20 Mode 5200MHz	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: Z

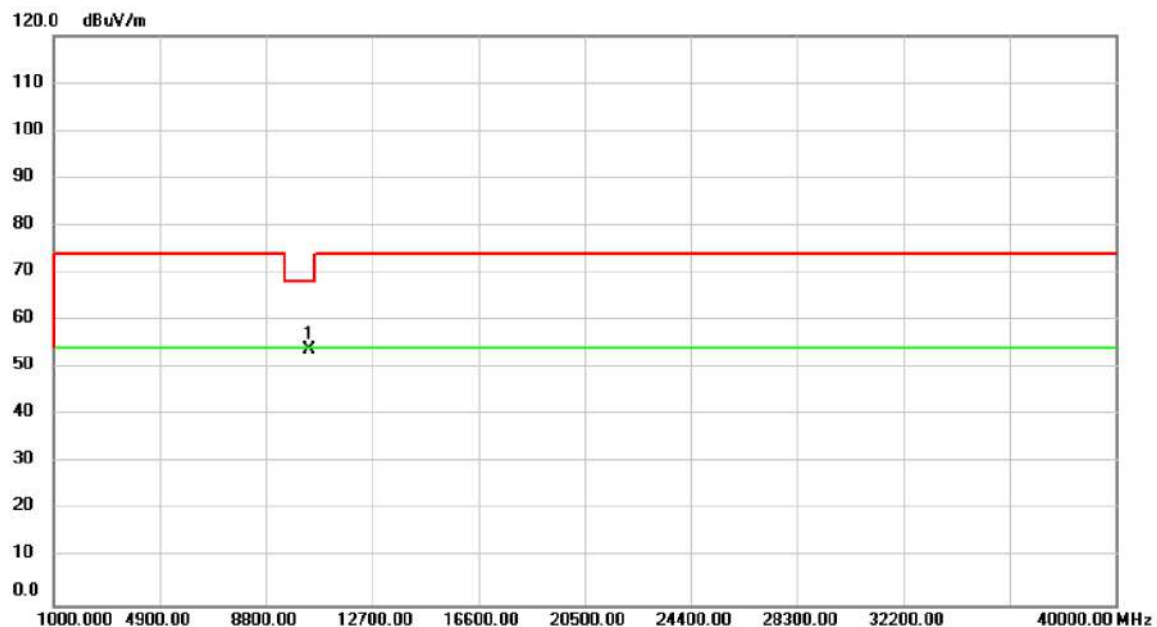

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	50.55	3.30	53.85	68.20	-14.35	peak	

Test Mode	UNII-1/ TX N20 Mode 5240MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: Z

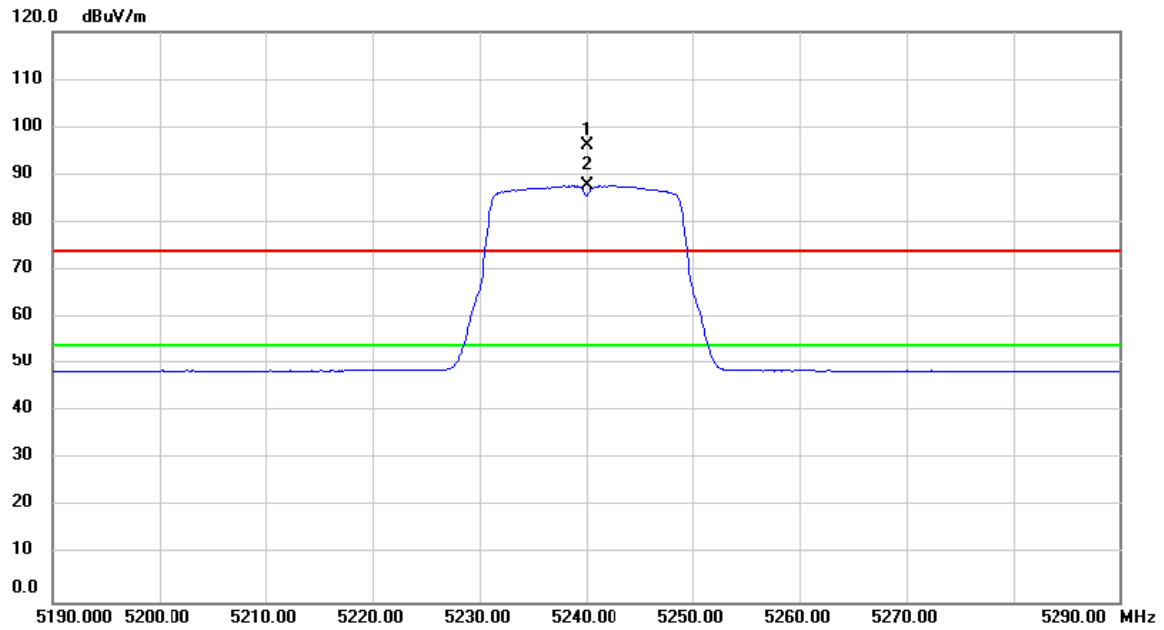

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5240.000	58.38	37.64	96.02	74.00	22.02	peak	No Limit
2	*	5240.000	50.06	37.64	87.70	54.00	33.70	AVG	No Limit

Test Mode	UNII-1/ TX N20 Mode 5240MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: Z

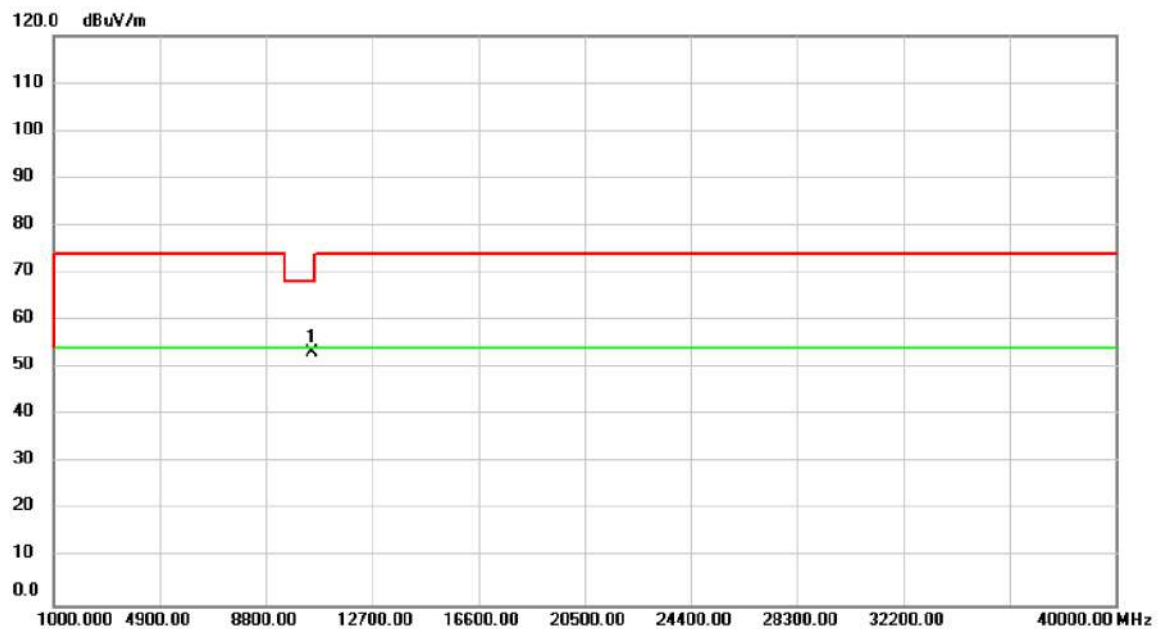

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	49.84	3.30	53.14	68.20	-15.06	peak	

Test Mode	UNII-1/ TX N20 Mode 5240MHz	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: Z

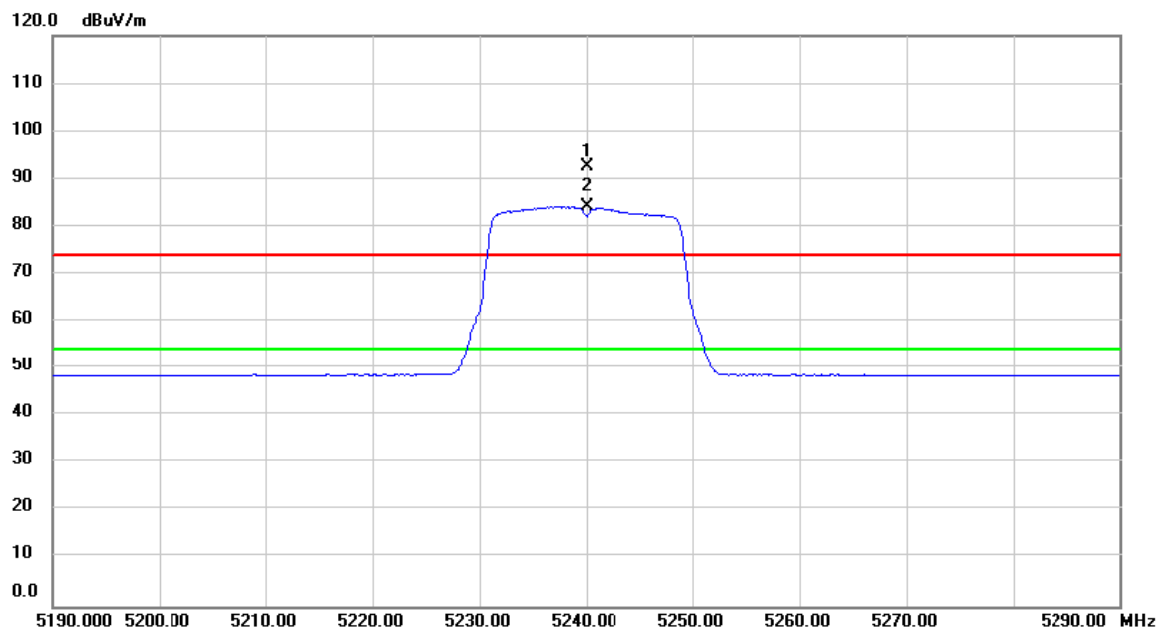

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5240.000	54.79	37.64	92.43	74.00	18.43	peak	No Limit
2	*	5240.000	46.49	37.64	84.13	54.00	30.13	AVG	No Limit

Test Mode	UNII-1/ TX N20 Mode 5240MHz	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: Z

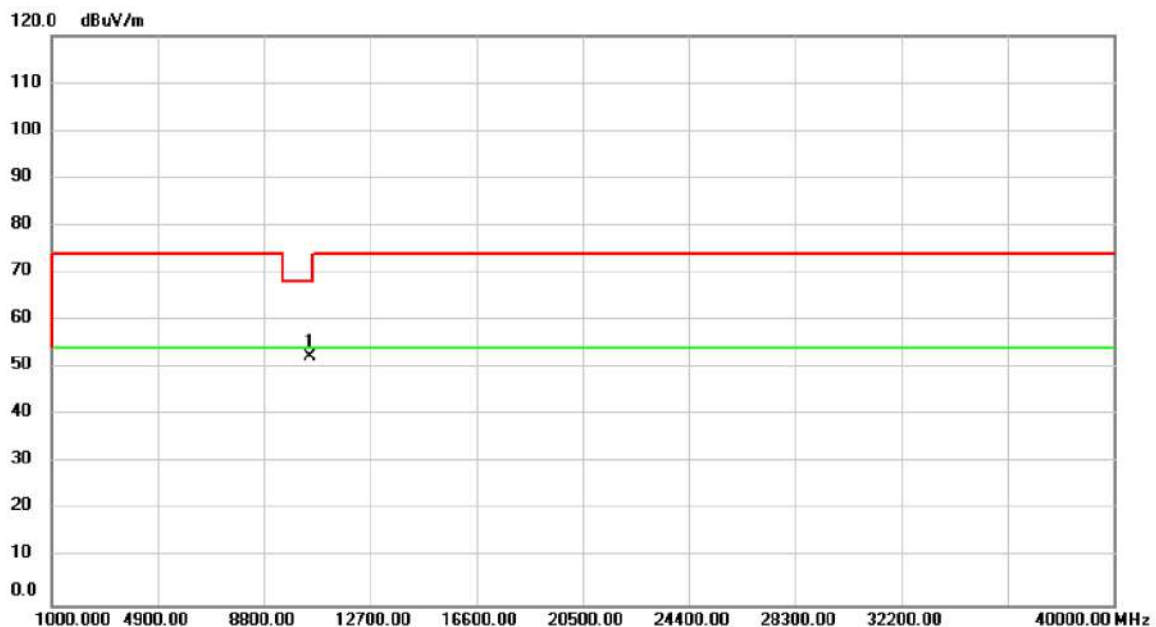

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	48.97	3.30	52.27	68.20	-15.93	peak	

Test Mode	UNII-1/ TX AC80 Mode 5210MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

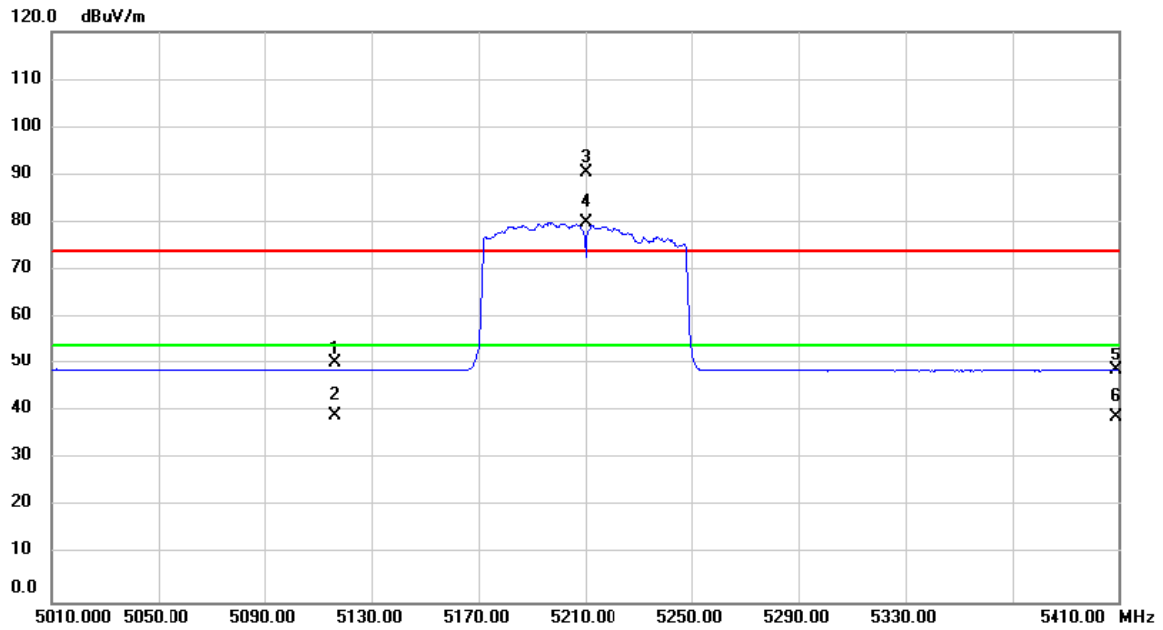

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5116.400	12.70	37.51	50.21	74.00	-23.79	peak	
2		5116.400	1.66	37.51	39.17	54.00	-14.83	AVG	
3	X	5210.000	52.98	37.61	90.59	74.00	16.59	peak	No Limit
4	*	5210.000	42.38	37.61	79.99	54.00	25.99	AVG	No Limit
5		5409.100	10.84	37.83	48.67	74.00	-25.33	peak	
6		5409.100	1.02	37.83	38.85	54.00	-15.15	AVG	

Test Mode	UNII-1/ TX AC80 Mode 5210MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

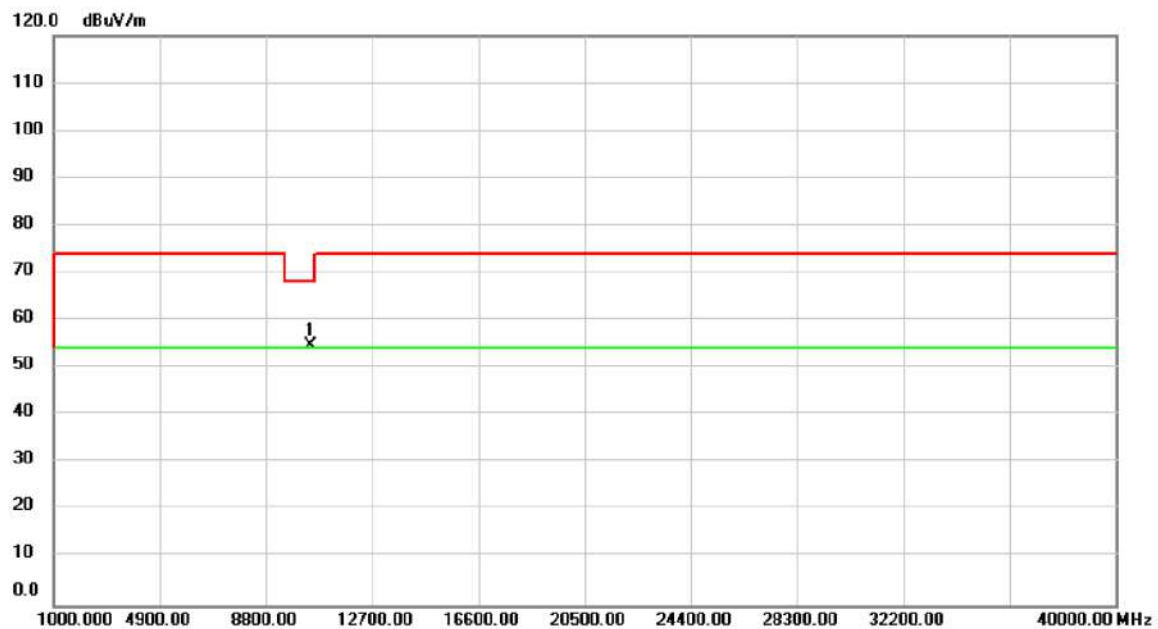

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	51.56	3.30	54.86	68.20	-13.34	peak	

Test Mode	UNII-1/ TX AC80 Mode 5210MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------


Orthogonal Axis: Z

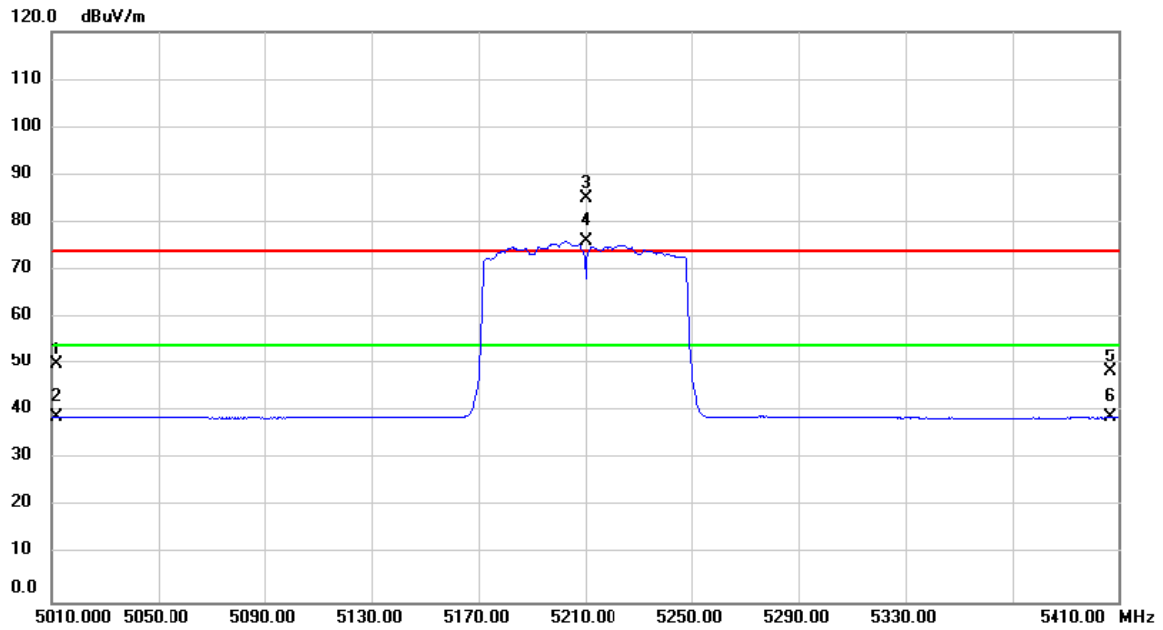

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5011.820	12.62	37.40	50.02	74.00	-23.98	peak	
2		5011.820	1.51	37.40	38.91	54.00	-15.09	AVG	
3	X	5210.000	47.41	37.61	85.02	74.00	11.02	peak	No Limit
4	*	5210.000	38.45	37.61	76.06	54.00	22.06	AVG	No Limit
5		5406.880	10.68	37.82	48.50	74.00	-25.50	peak	
6		5406.880	1.02	37.82	38.84	54.00	-15.16	AVG	

Test Mode	UNII-1/ TX AC80 Mode 5210MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------


Orthogonal Axis: Z

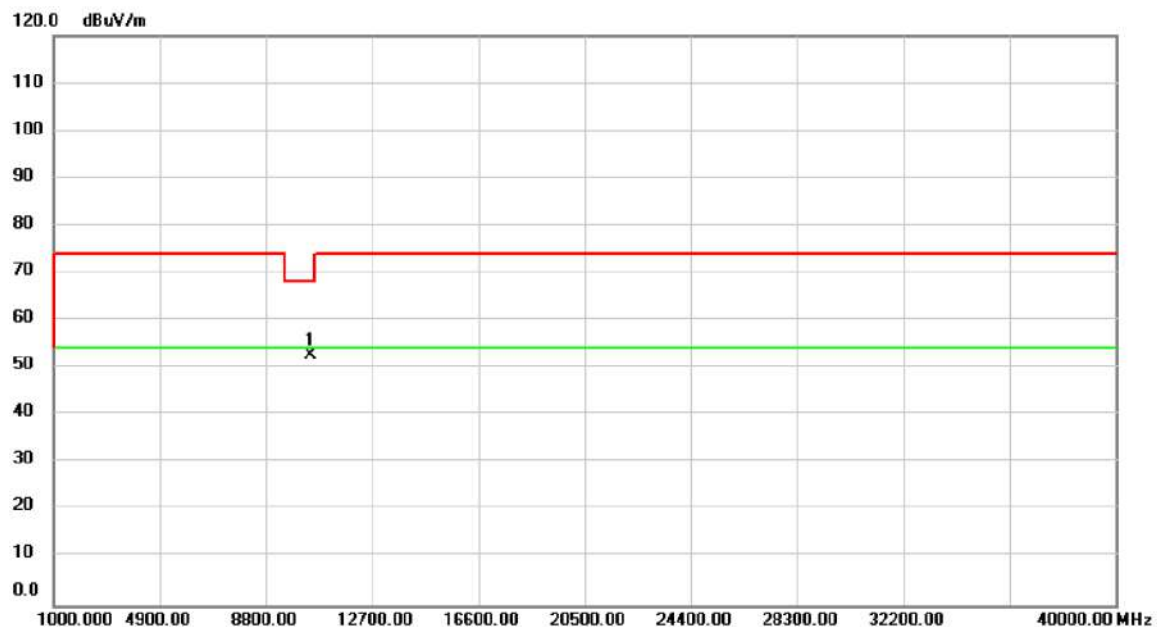

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	49.47	3.30	52.77	68.20	-15.43	peak	

Test Mode	UNII-2A/ TX A Mode 5260MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------


Orthogonal Axis: Z

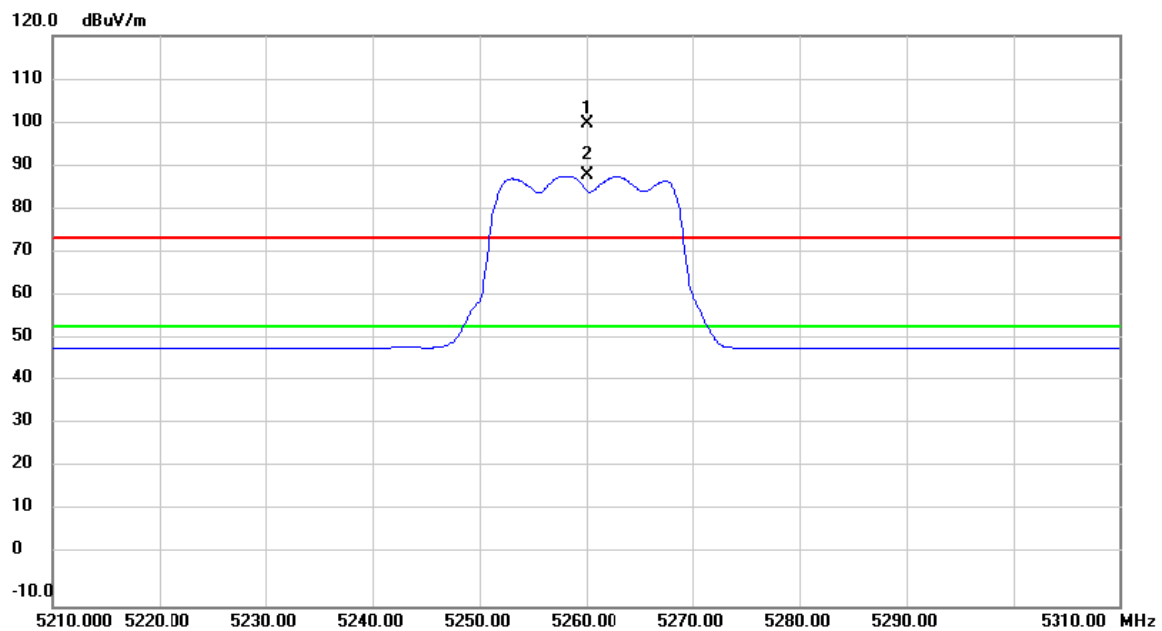

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5260.000	62.21	37.66	99.87	74.00	25.87	peak	No Limit
2	*	5260.000	50.50	37.66	88.16	54.00	34.16	AVG	No Limit

Test Mode	UNII-2A/ TX A Mode 5260MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: Z

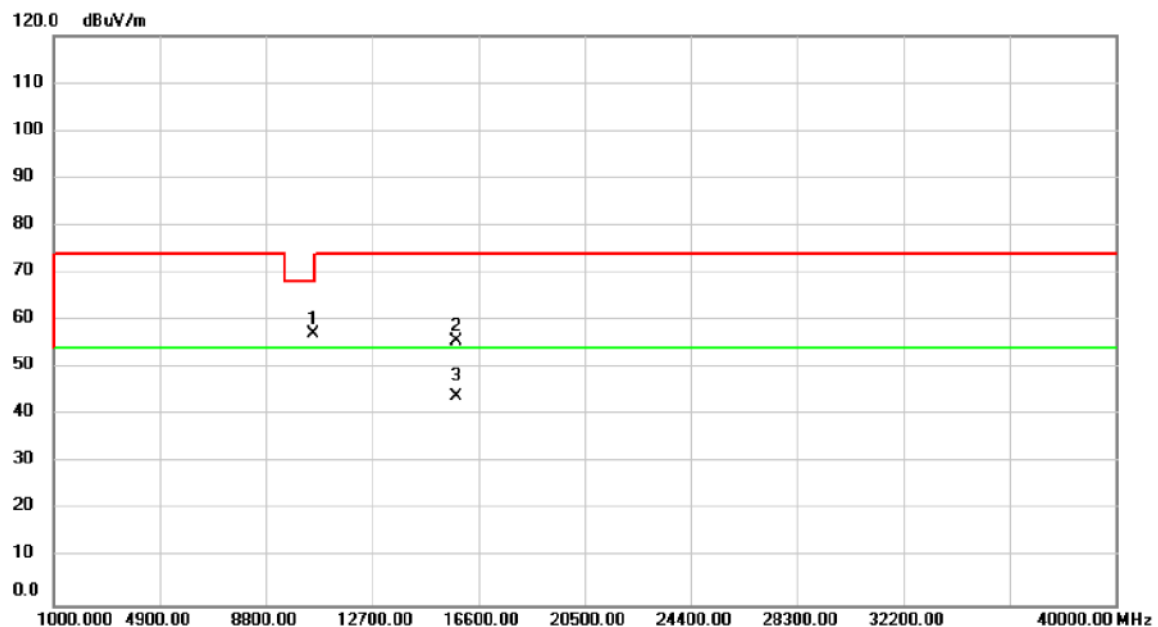


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10520.00	53.95	3.35	57.30	68.20	-10.90	peak	
2		15780.00	48.84	6.82	55.66	74.00	-18.34	peak	
3	*	15780.00	37.05	6.82	43.87	54.00	-10.13	AVG	

Test Mode UNII-2A/ TX A Mode 5260MHz

Polarization

Horizontal


Orthogonal Axis: Z

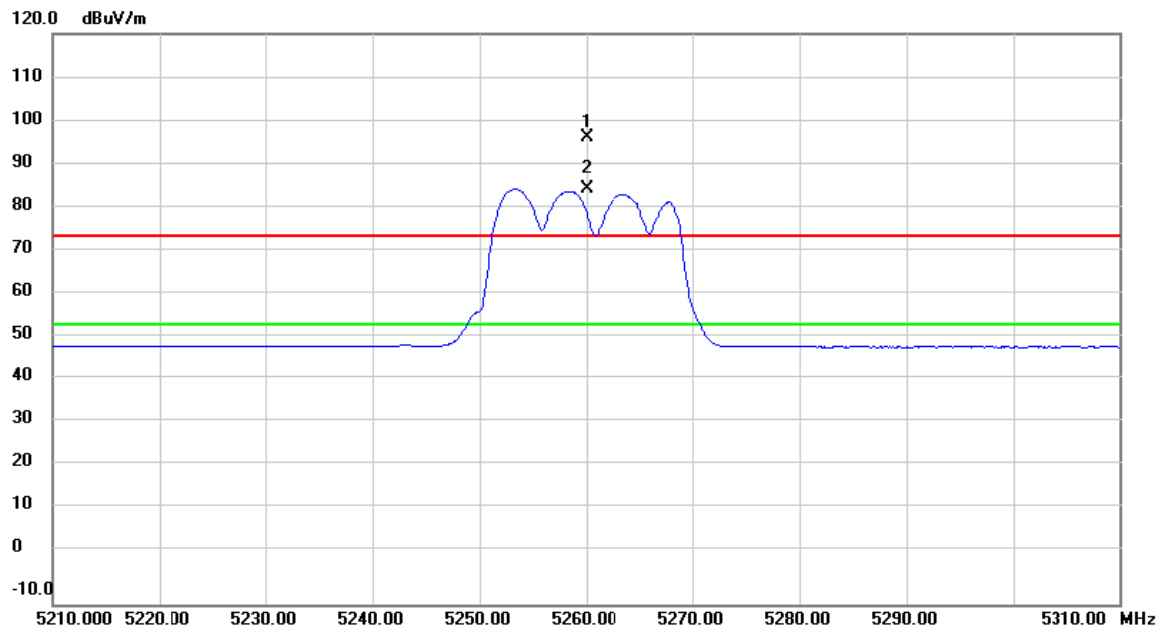

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5260.000	58.70	37.66	96.36	74.00	22.36	peak	No Limit
2	*	5260.000	46.98	37.66	84.64	54.00	30.64	AVG	No Limit

Test Mode	UNII-2A/ TX A Mode 5260MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------


Orthogonal Axis: Z

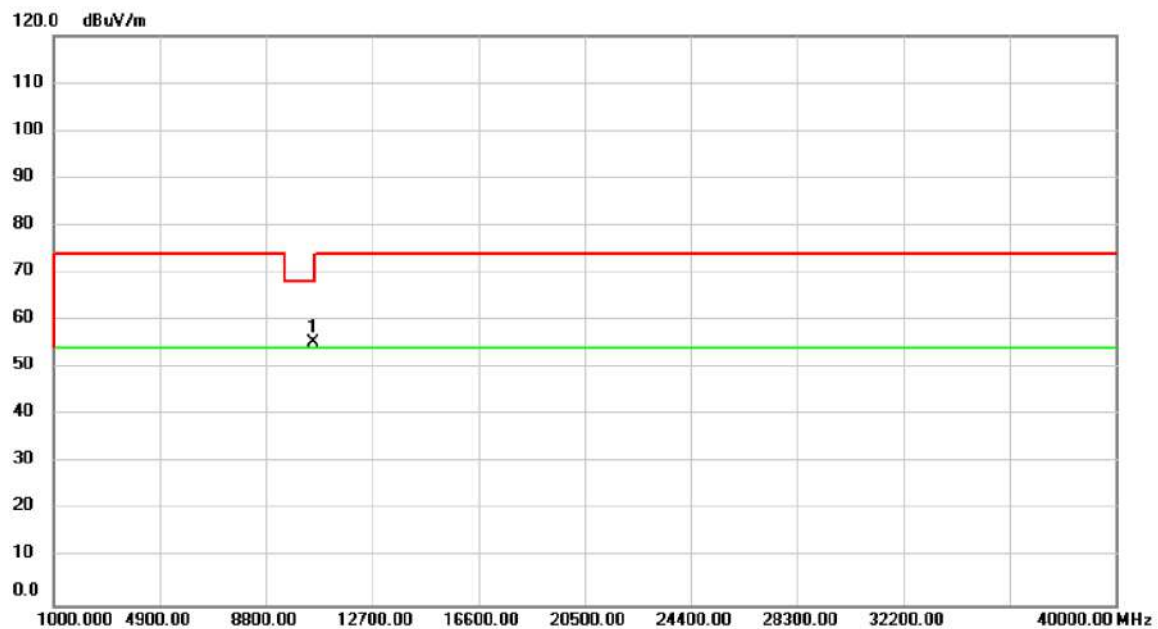

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	52.01	3.35	55.36	68.20	-12.84	peak	

Test Mode	UNII-2A/ TX A Mode 5300MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------


Orthogonal Axis: Z

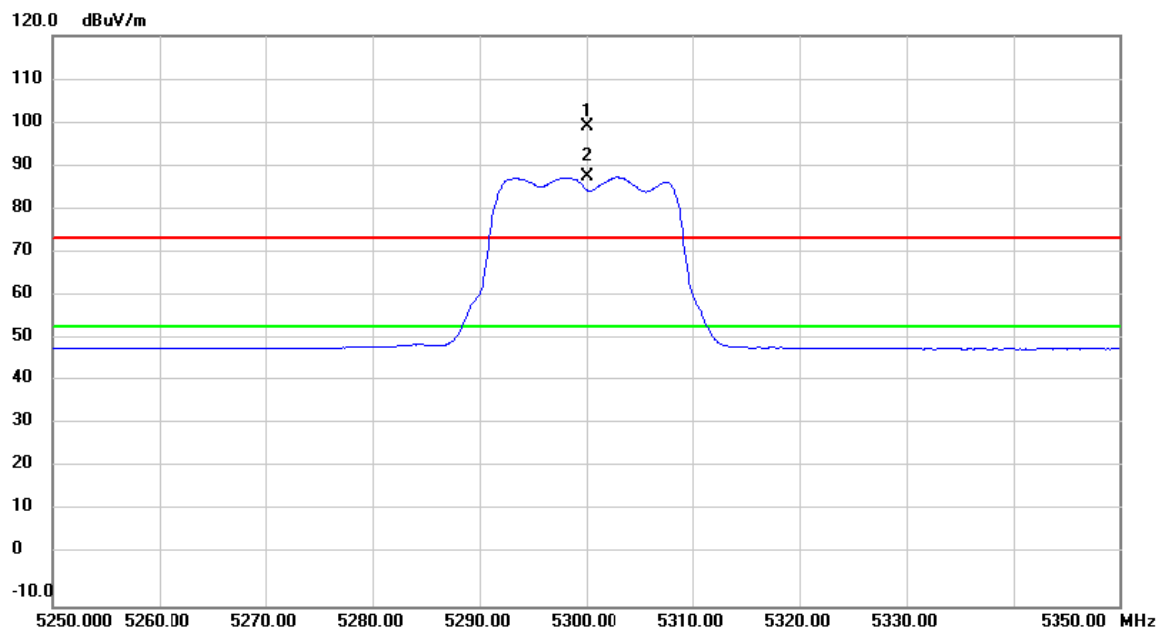

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5300.000	61.65	37.70	99.35	74.00	25.35	peak	No Limit
2	*	5300.000	50.16	37.70	87.86	54.00	33.86	AVG	No Limit

Test Mode	UNII-2A/ TX A Mode 5300MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: Z

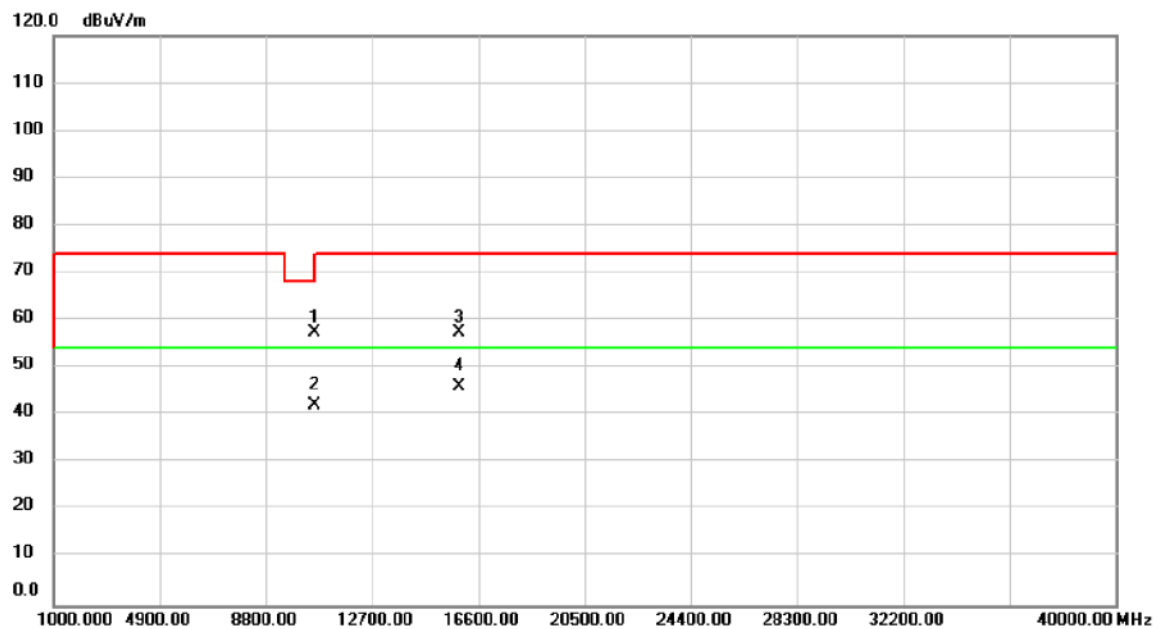


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	53.98	3.50	57.48	74.00	-16.52	peak	
2		10600.10	38.61	3.50	42.11	54.00	-11.89	AVG	
3		15900.00	50.85	6.67	57.52	74.00	-16.48	peak	
4	*	15900.00	39.24	6.67	45.91	54.00	-8.09	AVG	

Test Mode UNII-2A/ TX A Mode 5300MHz

Polarization

Horizontal


Orthogonal Axis: Z

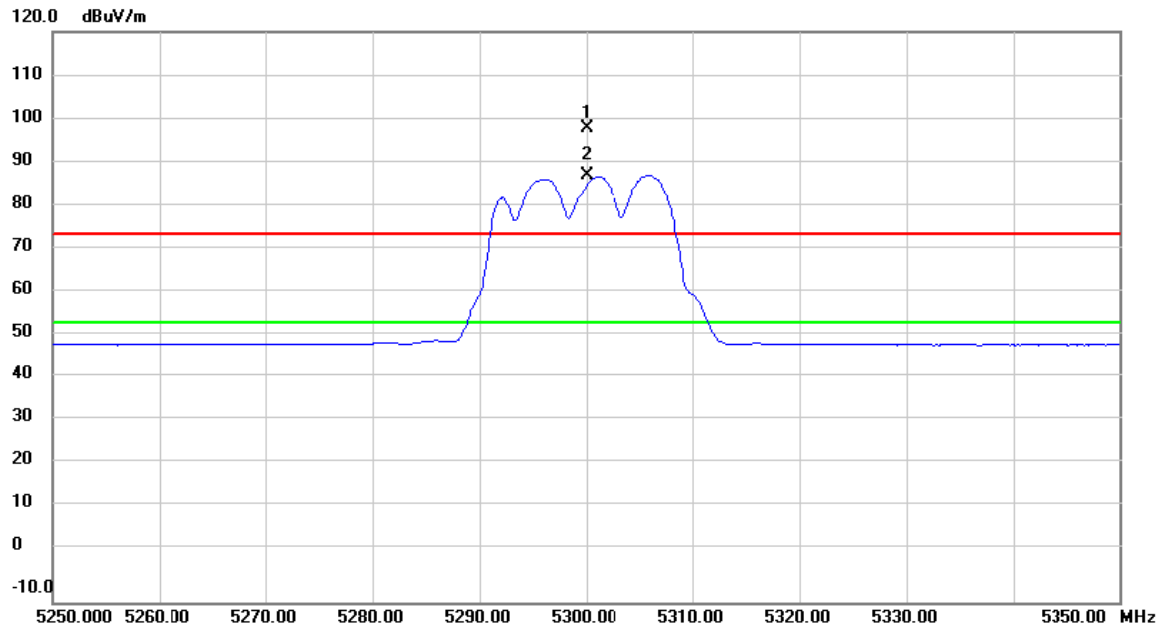

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5300.000	60.34	37.70	98.04	74.00	24.04	peak	No Limit
2	*	5300.000	49.69	37.70	87.39	54.00	33.39	AVG	No Limit

Test Mode	UNII-2A/ TX A Mode 5300MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

Orthogonal Axis: Z

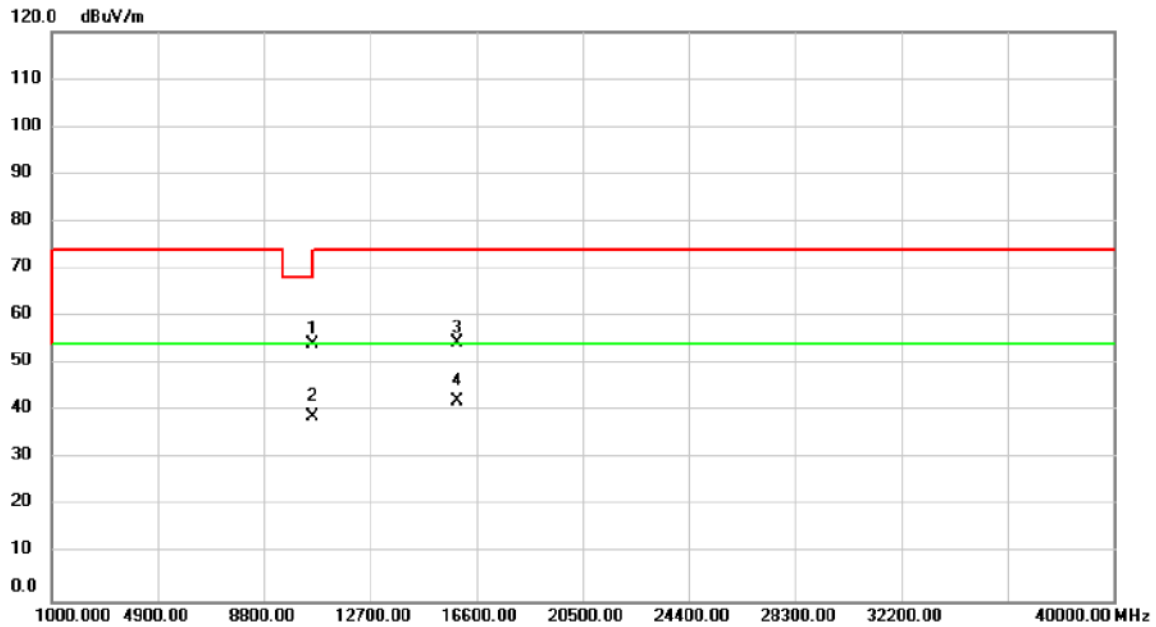


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	50.57	3.50	54.07	74.00	-19.93	peak	
2		10600.10	35.33	3.50	38.83	54.00	-15.17	AVG	
3		15900.00	47.83	6.67	54.50	74.00	-19.50	peak	
4	*	15900.00	35.37	6.67	42.04	54.00	-11.96	AVG	

Test Mode UNII-2A/ TX A Mode 5320MHz

Polarization

Vertical


Orthogonal Axis: Z

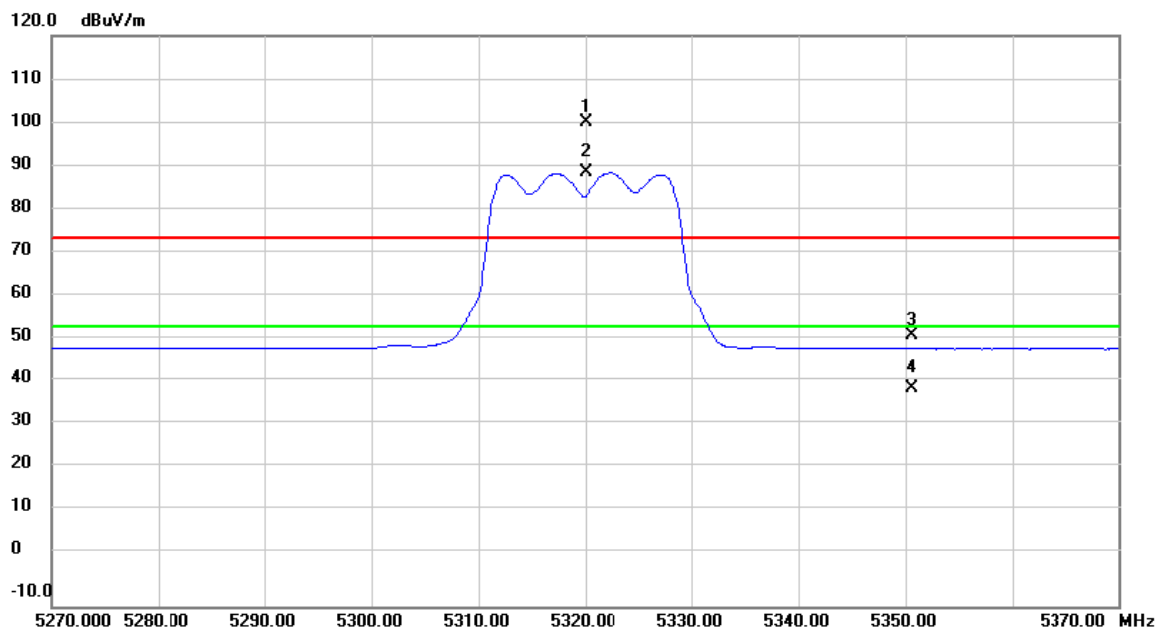

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	62.64	37.72	100.36	74.00	26.36	peak	No Limit
2	*	5320.000	51.14	37.72	88.86	54.00	34.86	AVG	No Limit
3		5350.580	14.00	37.76	51.76	74.00	-22.24	peak	
4		5350.580	1.92	37.76	39.68	54.00	-14.32	AVG	

Test Mode	UNII-2A/ TX A Mode 5320MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: Z

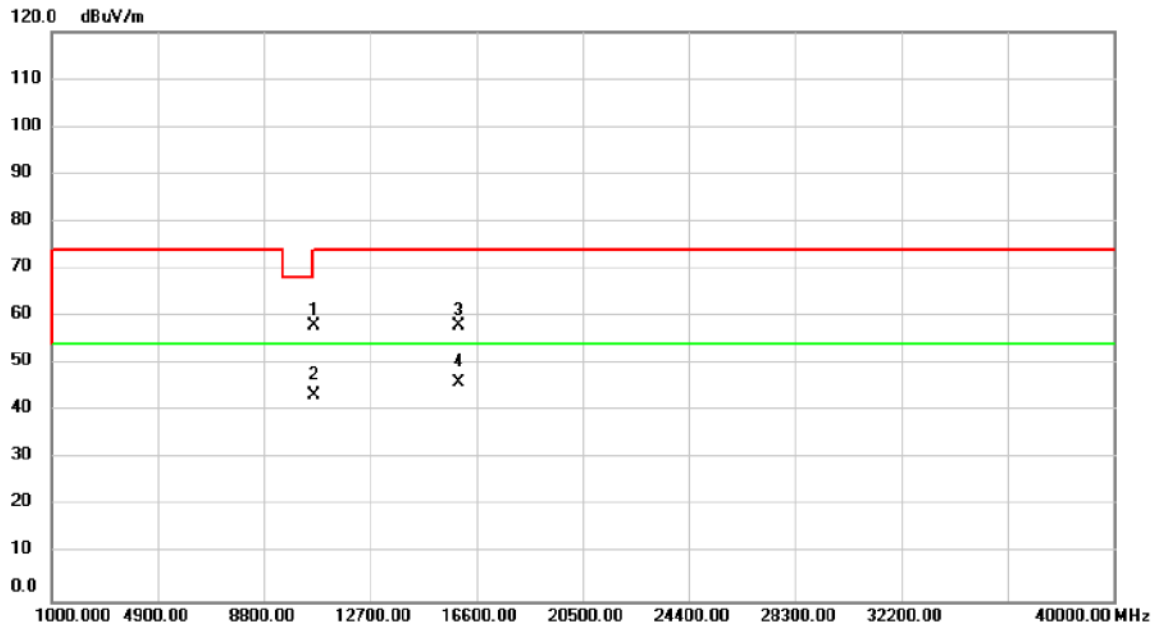


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	54.34	3.58	57.92	74.00	-16.08	peak	
2		10640.00	39.69	3.58	43.27	54.00	-10.73	AVG	
3		15960.00	51.45	6.60	58.05	74.00	-15.95	peak	
4	*	15960.00	39.45	6.60	46.05	54.00	-7.95	AVG	

Test Mode UNII-2A/ TX A Mode 5320MHz

Polarization

Horizontal


Orthogonal Axis: Z

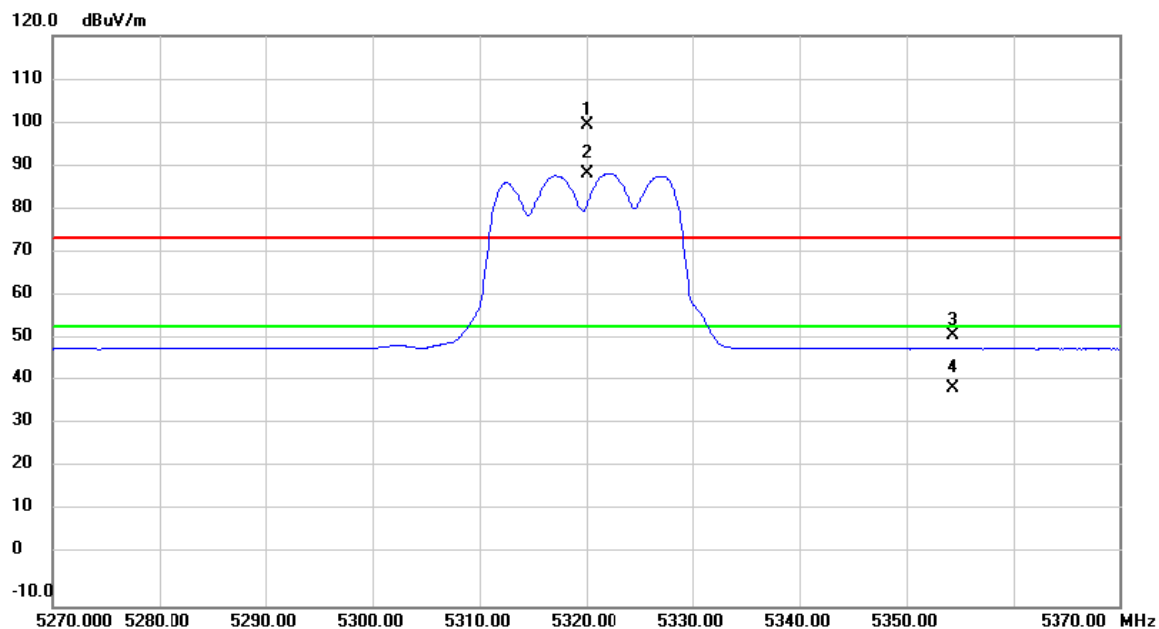

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	61.81	37.72	99.53	74.00	25.53	peak	No Limit
2	*	5320.000	51.03	37.72	88.75	54.00	34.75	AVG	No Limit
3		5354.400	14.18	37.76	51.94	74.00	-22.06	peak	
4		5354.400	1.74	37.76	39.50	54.00	-14.50	AVG	

Test Mode	UNII-2A/ TX A Mode 5320MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------


Orthogonal Axis: Z

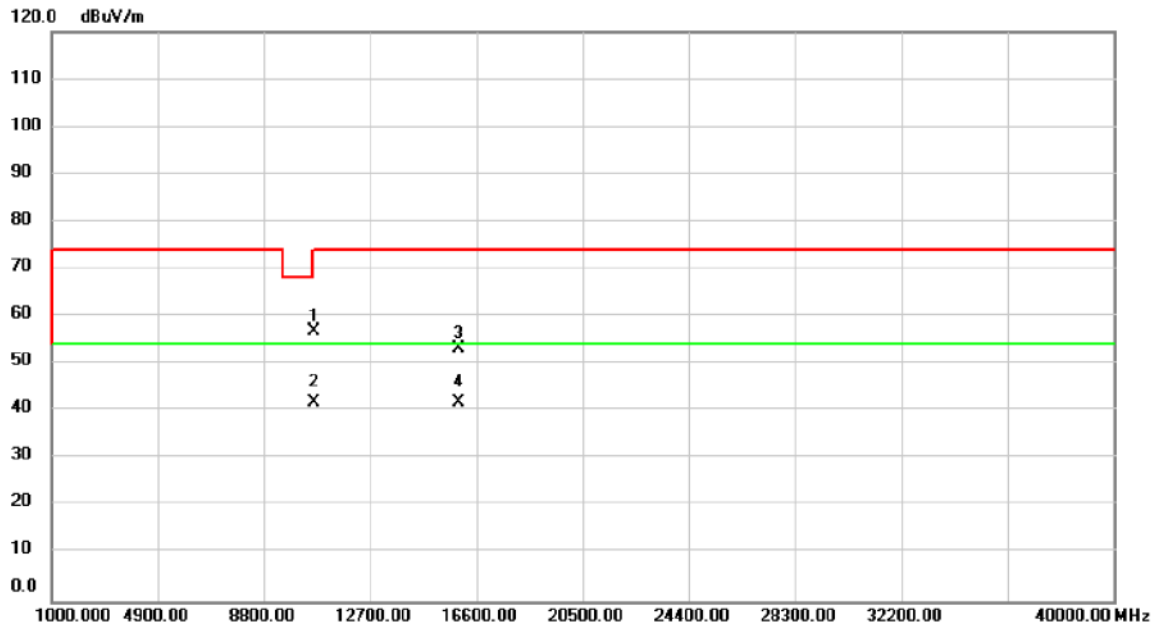

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	53.25	3.58	56.83	74.00	-17.17	peak	
2	*	10640.00	38.29	3.58	41.87	54.00	-12.13	AVG	
3		15960.00	46.80	6.60	53.40	74.00	-20.60	peak	
4		15960.00	35.14	6.60	41.74	54.00	-12.26	AVG	

Test Mode	UNII-2A/ TX N20 Mode 5260MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

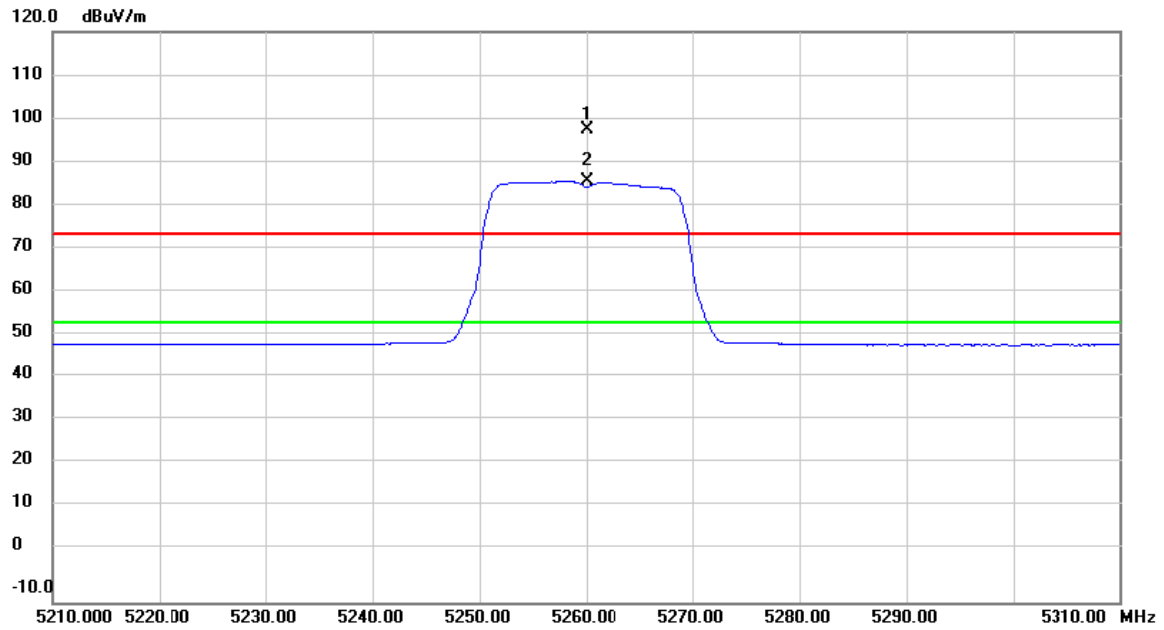

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5260.000	60.11	37.66	97.77	74.00	23.77	peak	No Limit
2	*	5260.000	48.30	37.66	85.96	54.00	31.96	AVG	No Limit

Test Mode	UNII-2A/ TX N20 Mode 5260MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

Orthogonal Axis: Z

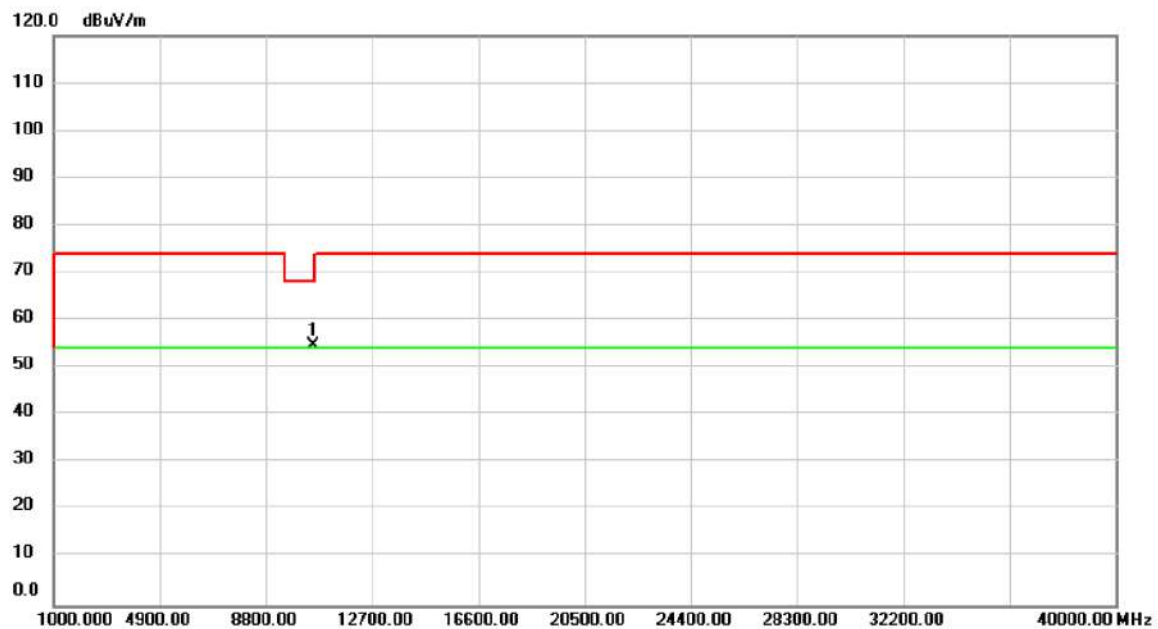


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	51.33	3.35	54.68	68.20	-13.52	peak	

Test Mode UNII-2A/ TX N20 Mode 5260MHz

Polarization

Horizontal


Orthogonal Axis: Z

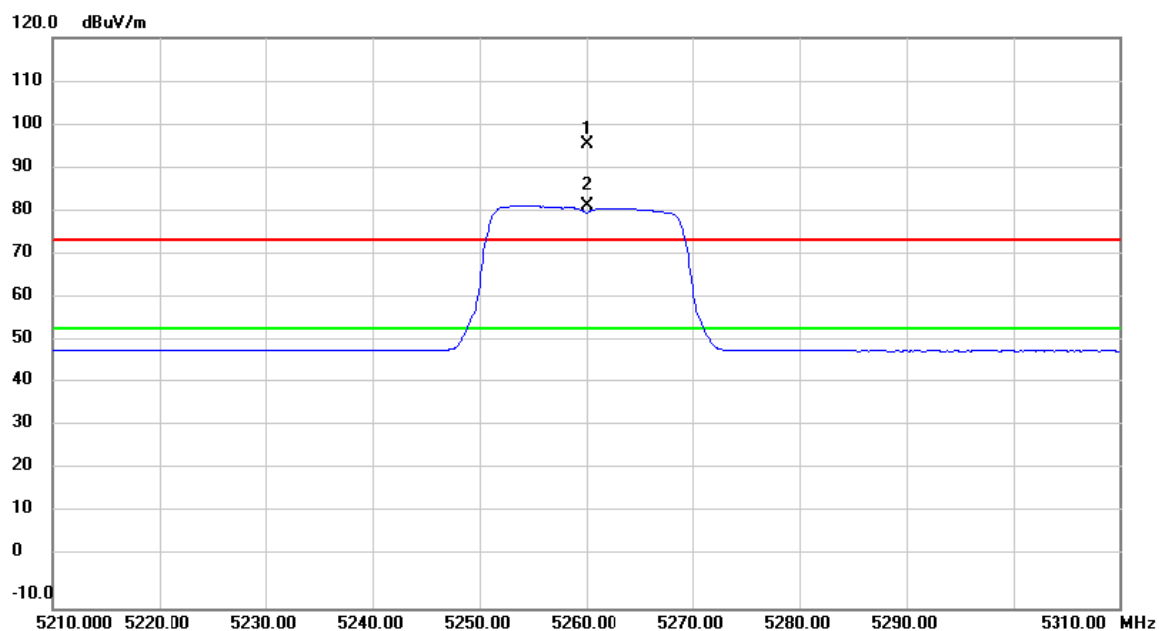

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5260.000	58.05	37.66	95.71	74.00	21.71	peak	No Limit
2	*	5260.000	44.20	37.66	81.86	54.00	27.86	AVG	No Limit

Test Mode	UNII-2A/ TX N20 Mode 5260MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------


Orthogonal Axis: Z

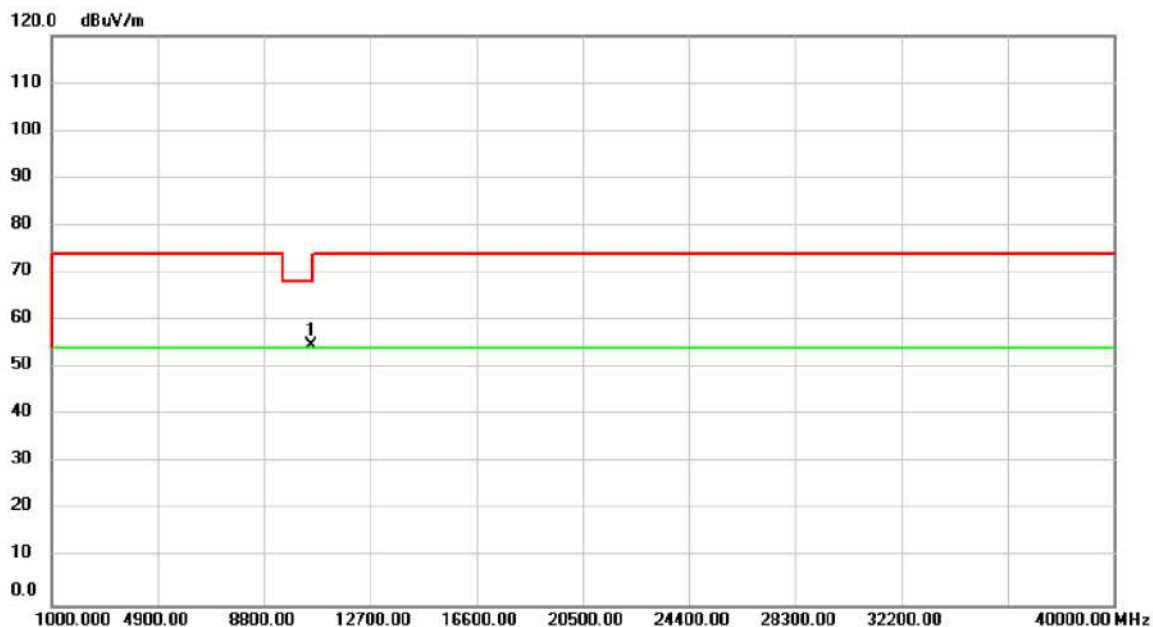

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	51.28	3.35	54.63	68.20	-13.57	peak	

Test Mode	UNII-2A/ TX N20 Mode 5300MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

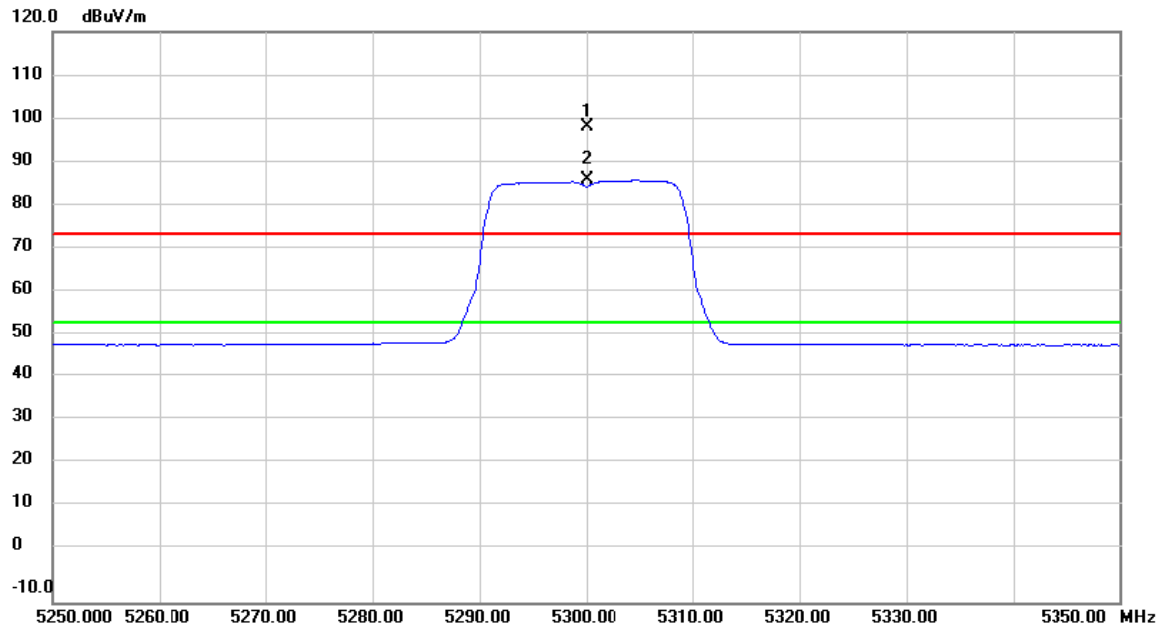

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5300.000	60.74	37.70	98.44	74.00	24.44	peak	No Limit
2	*	5300.000	48.53	37.70	86.23	54.00	32.23	AVG	No Limit

Test Mode	UNII-2A/ TX N20 Mode 5300MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

Orthogonal Axis: Z

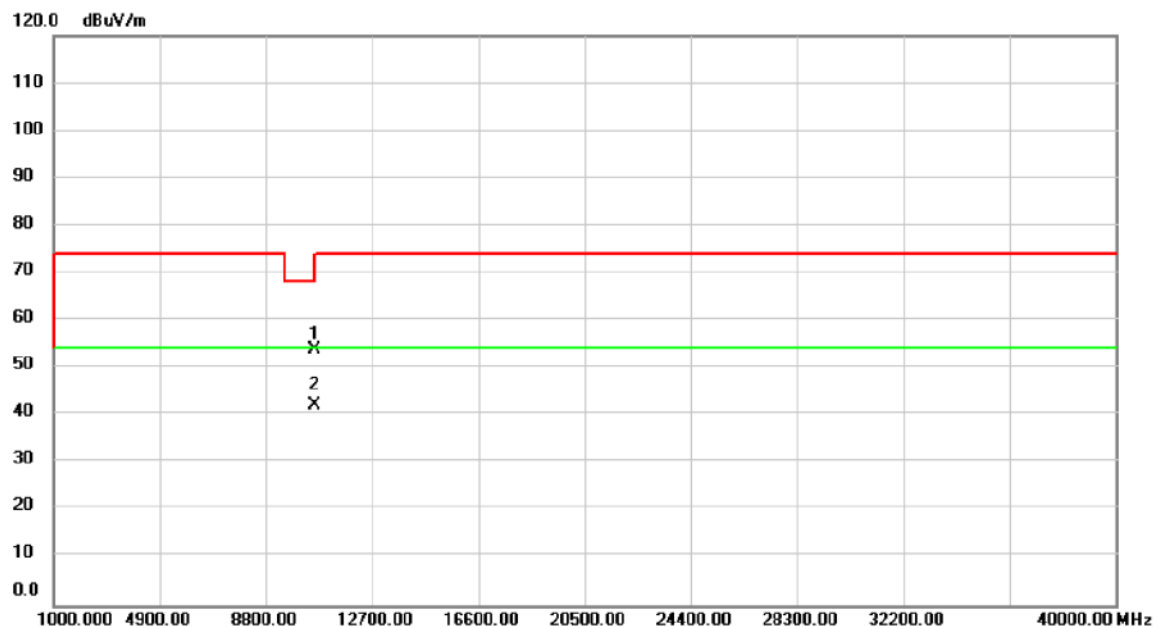


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	50.43	3.50	53.93	74.00	-20.07	peak	
2	*	10600.10	38.57	3.50	42.07	54.00	-11.93	AVG	

Test Mode UNII-2A/ TX N20 Mode 5300MHz

Polarization

Horizontal

Orthogonal Axis: Z

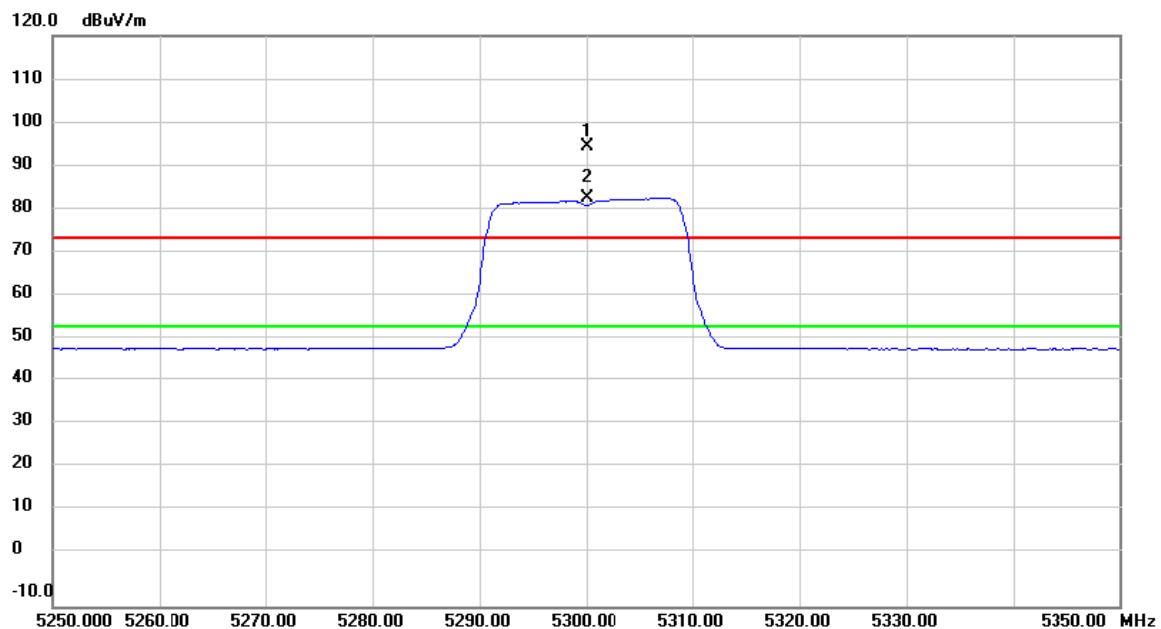


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5300.000	57.24	37.70	94.94	74.00	20.94	peak	No Limit
2	*	5300.000	45.38	37.70	83.08	54.00	29.08	AVG	No Limit

Test Mode UNII-2A/ TX N20 Mode 5300MHz

Polarization

Horizontal

Orthogonal Axis: Z

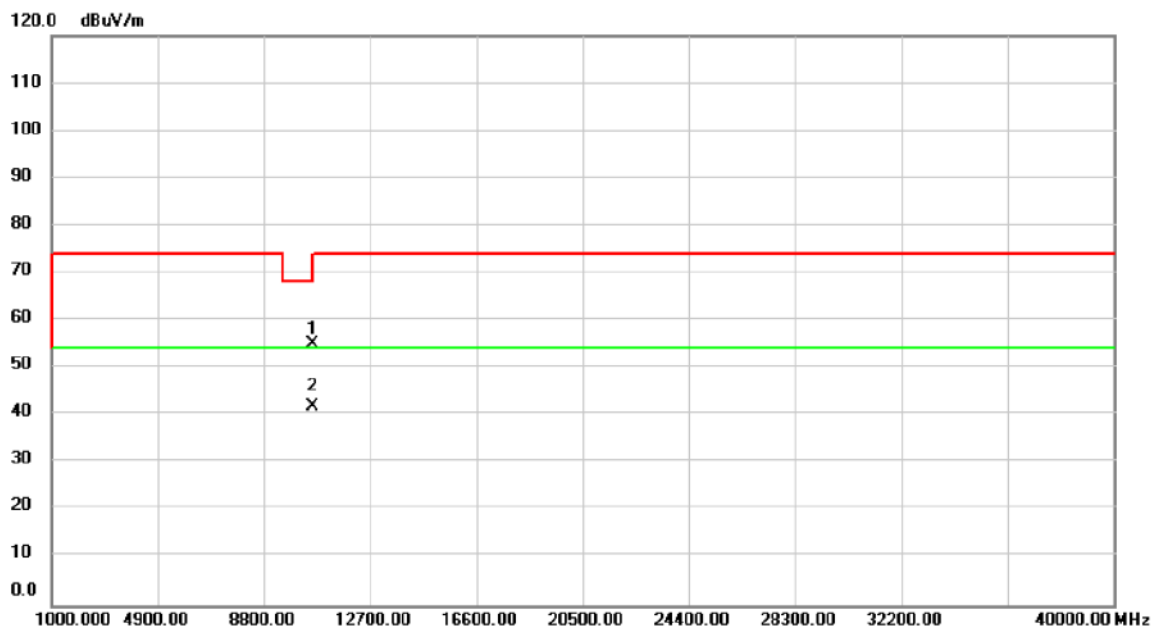


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	51.66	3.50	55.16	74.00	-18.84	peak	
2	*	10600.10	38.45	3.50	41.95	54.00	-12.05	AVG	

Test Mode UNII-2A/ TX N20 Mode 5320MHz

Polarization

Vertical


Orthogonal Axis: Z

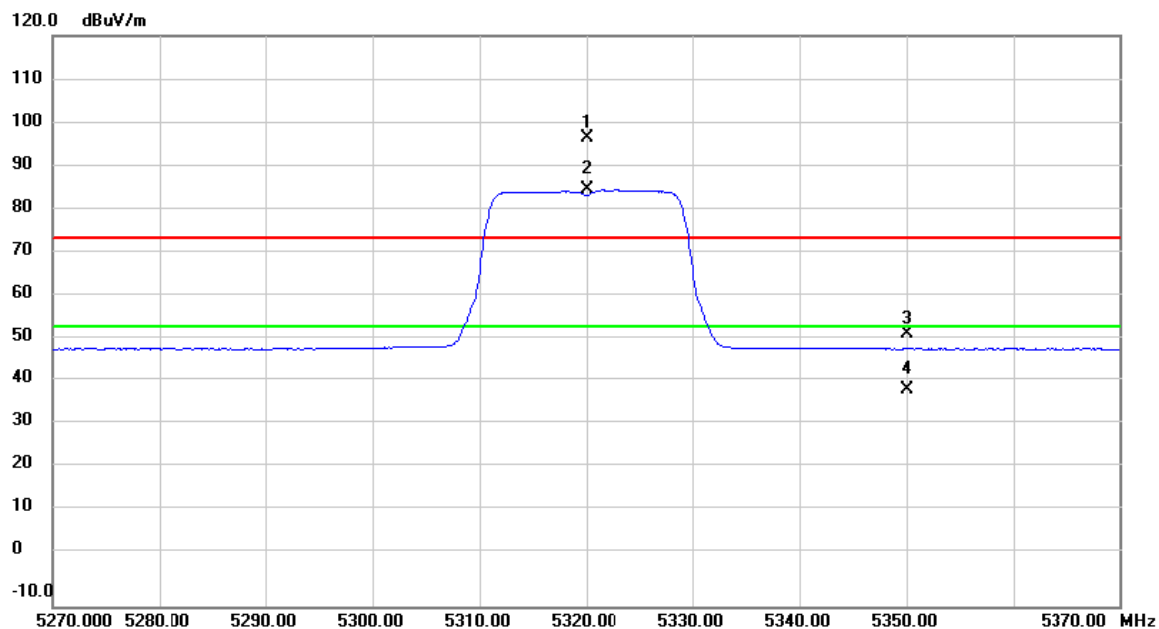

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	58.90	37.72	96.62	74.00	22.62	peak	No Limit
2	*	5320.000	47.24	37.72	84.96	54.00	30.96	AVG	No Limit
3		5350.040	14.47	37.76	52.23	74.00	-21.77	peak	
4		5350.040	1.64	37.76	39.40	54.00	-14.60	AVG	

Test Mode	UNII-2A/ TX N20 Mode 5320MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

Orthogonal Axis: Z

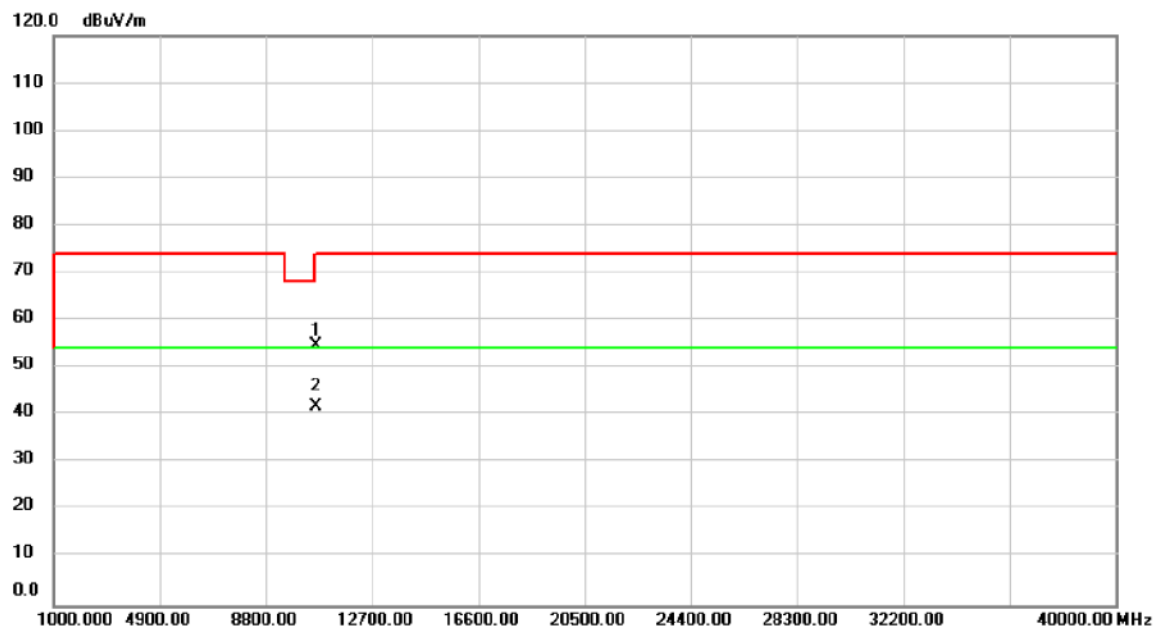


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	51.04	3.58	54.62	74.00	-19.38	peak	
2	*	10640.00	38.35	3.58	41.93	54.00	-12.07	AVG	

Test Mode UNII-2A/ TX N20 Mode 5320MHz

Polarization

Horizontal


Orthogonal Axis: Z

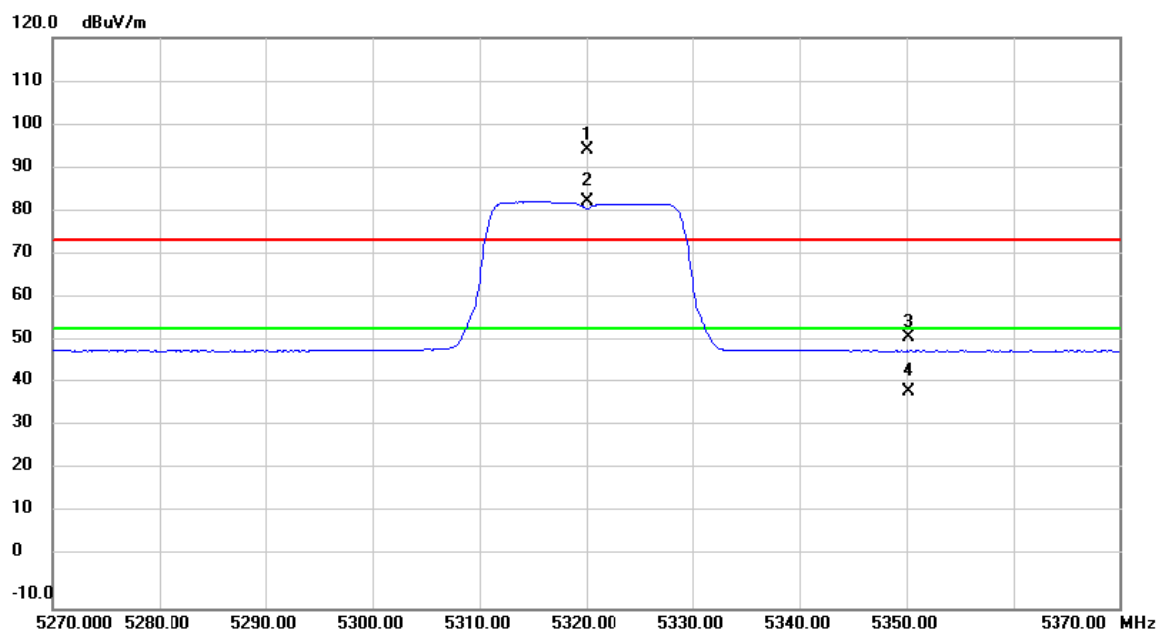

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	56.75	37.72	94.47	74.00	20.47	peak	No Limit
2	*	5320.000	45.01	37.72	82.73	54.00	28.73	AVG	No Limit
3		5350.160	14.08	37.76	51.84	74.00	-22.16	peak	
4		5350.160	1.50	37.76	39.26	54.00	-14.74	AVG	

Test Mode	UNII-2A/ TX N20 Mode 5320MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

Orthogonal Axis: Z

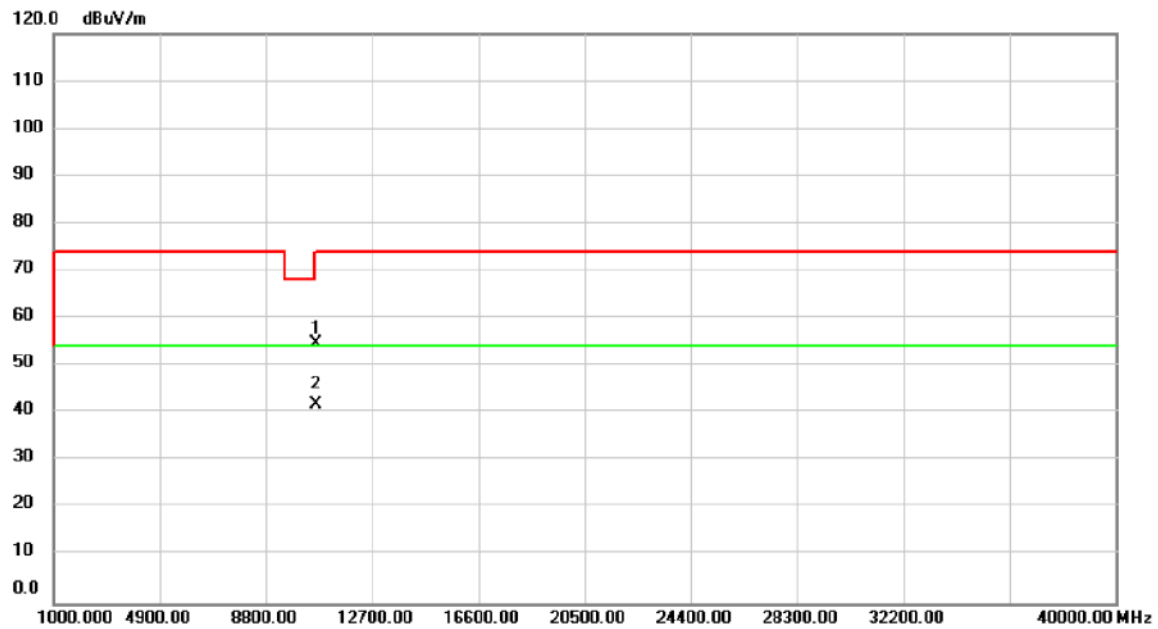


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	51.28	3.58	54.86	74.00	-19.14	peak	
2	*	10640.00	38.37	3.58	41.95	54.00	-12.05	AVG	

Test Mode UNII-2A/ TX AC80 Mode 5290MHz

Polarization

Vertical


Orthogonal Axis: Z

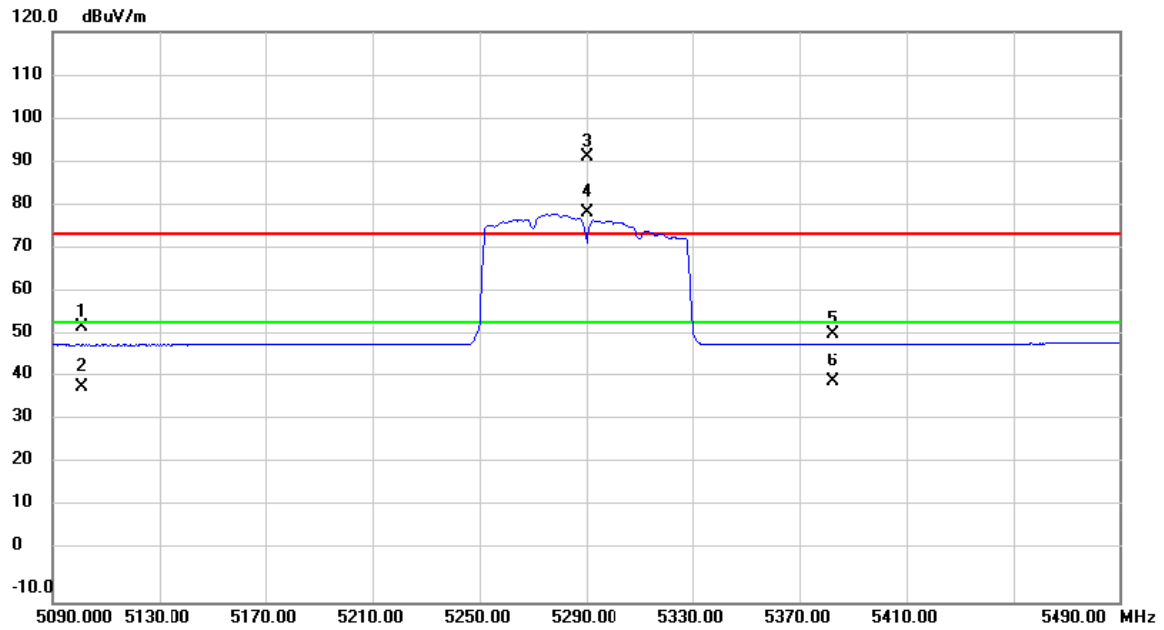

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5101.040	15.34	37.49	52.83	74.00	-21.17	peak	
2		5101.040	1.51	37.49	39.00	54.00	-15.00	AVG	
3	X	5290.000	53.87	37.69	91.56	74.00	17.56	peak	No Limit
4	*	5290.000	41.06	37.69	78.75	54.00	24.75	AVG	No Limit
5		5382.480	13.55	37.79	51.34	74.00	-22.66	peak	
6		5382.480	2.37	37.79	40.16	54.00	-13.84	AVG	

Test Mode	UNII-2A/ TX AC80 Mode 5290MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

Orthogonal Axis: Z

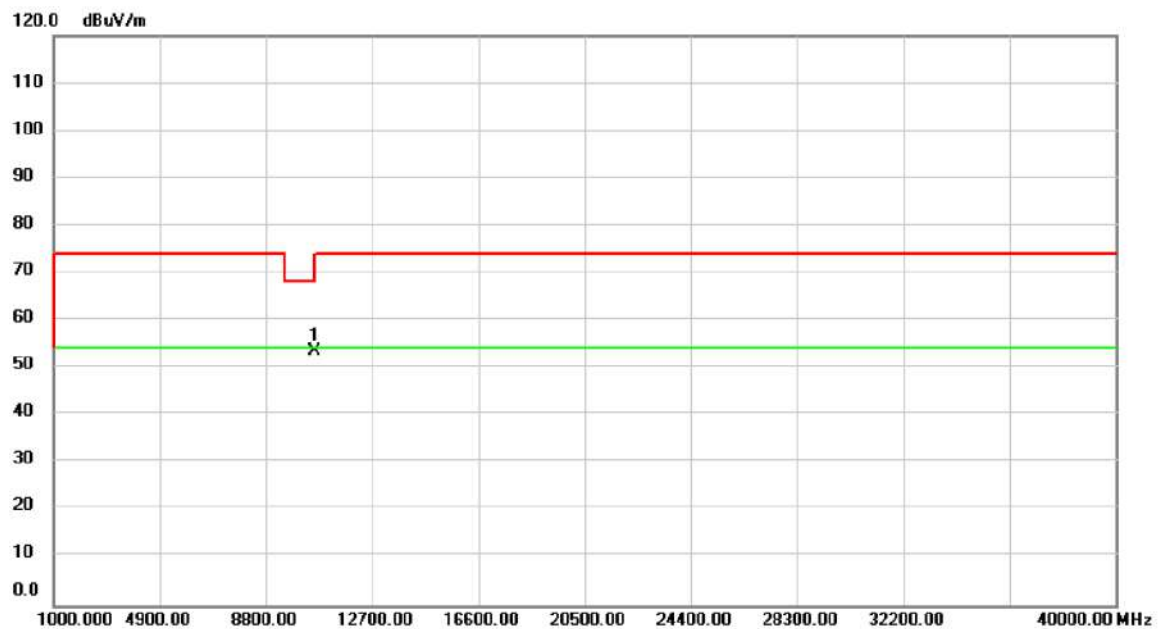


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.29	50.14	3.46	53.60	68.20	-14.60	peak	

Test Mode UNII-2A/ TX AC80 Mode 5290MHz

Polarization

Horizontal


Orthogonal Axis: Z

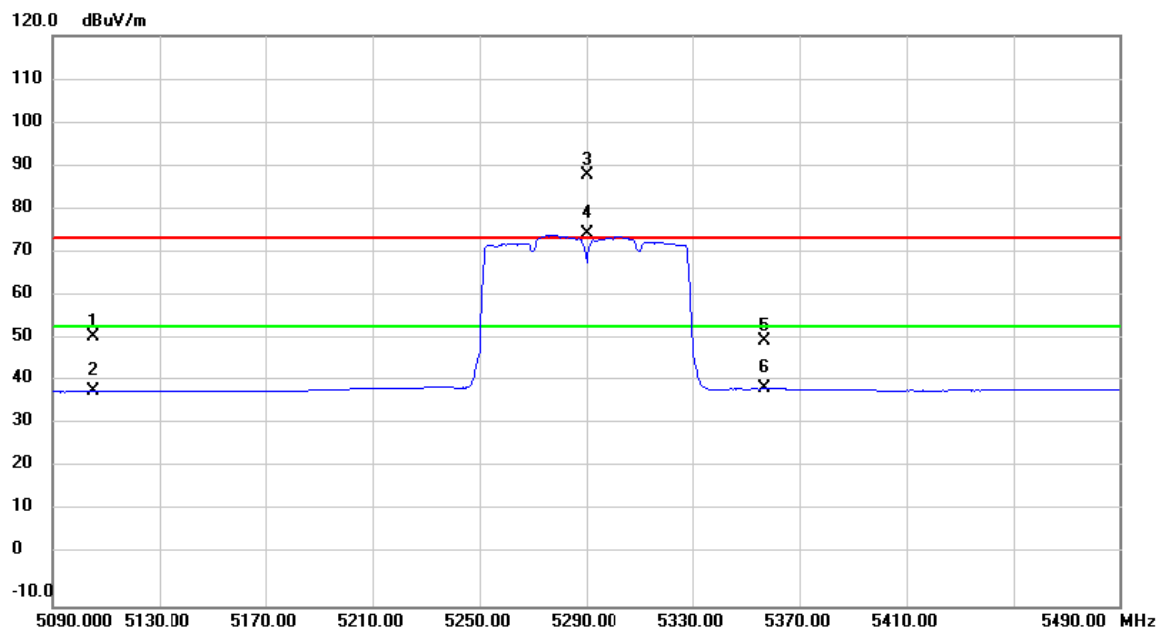

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5105.120	13.96	37.49	51.45	74.00	-22.55	peak	
2		5105.120	1.49	37.49	38.98	54.00	-15.02	AVG	
3	X	5290.000	50.54	37.69	88.23	74.00	14.23	peak	No Limit
4	*	5290.000	37.16	37.69	74.85	54.00	20.85	AVG	No Limit
5		5357.140	13.01	37.76	50.77	74.00	-23.23	peak	
6		5357.140	1.75	37.76	39.51	54.00	-14.49	AVG	

Test Mode	UNII-2A/ TX AC80 Mode 5290MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

Orthogonal Axis: Z

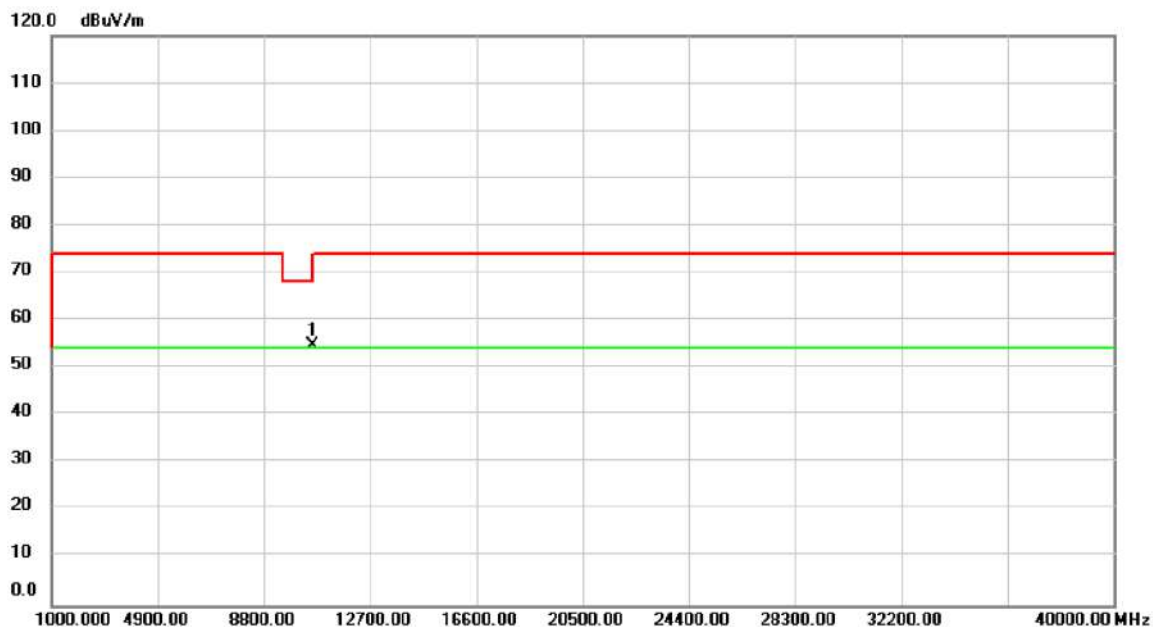


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.78	51.17	3.46	54.63	68.20	-13.57	peak	

Test Mode UNII-2C/ TX A Mode 5500MHz

Polarization

Vertical


Orthogonal Axis: Z

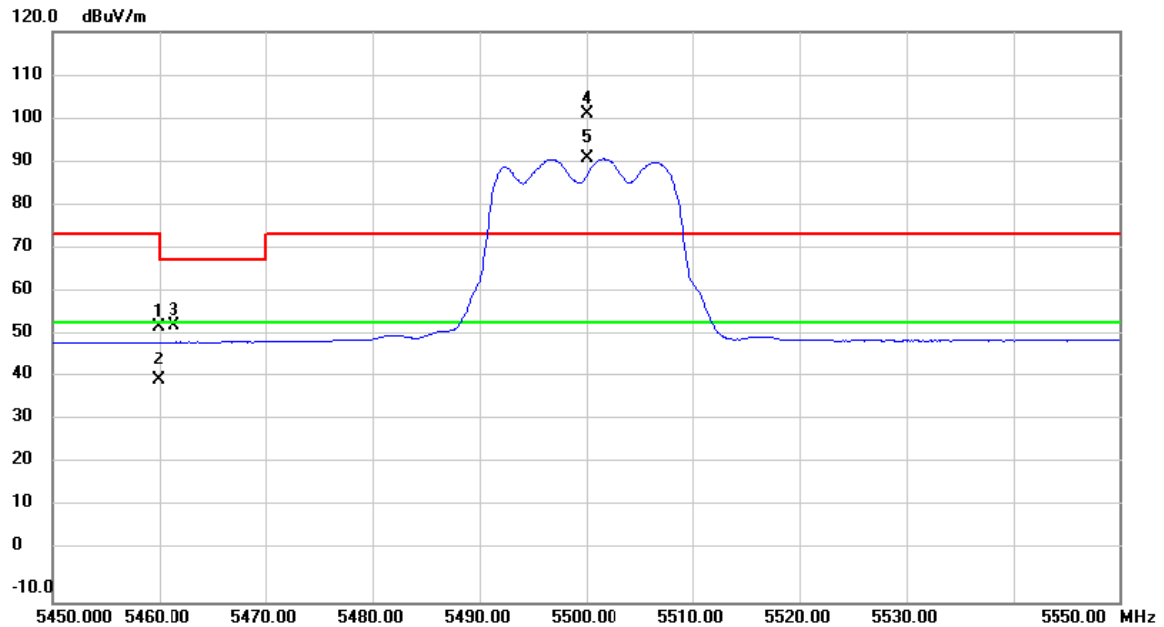

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5459.930	15.02	37.88	52.90	74.00	-21.10	peak	
2		5459.930	2.69	37.88	40.57	54.00	-13.43	AVG	
3		5461.430	15.40	37.88	53.28	68.20	-14.92	peak	
4	X	5500.000	63.36	37.92	101.28	74.00	27.28	peak	No Limit
5	*	5500.000	53.23	37.92	91.15	54.00	37.15	AVG	No Limit

Test Mode	UNII-2C/ TX A Mode 5500MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: Z

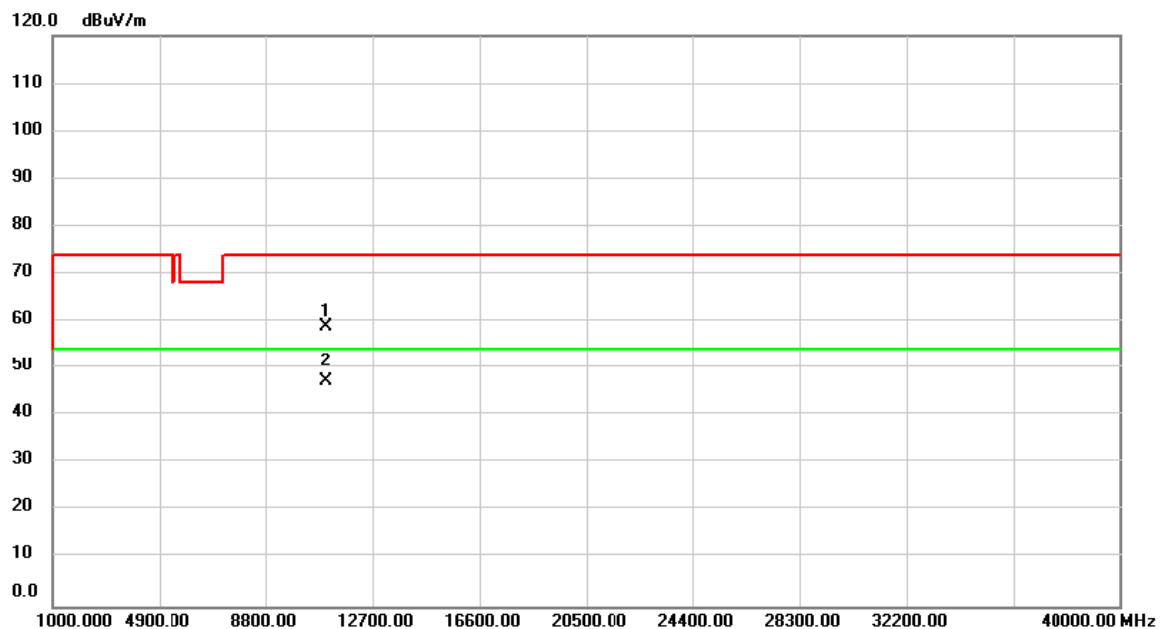


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	54.76	4.26	59.02	74.00	-14.98	peak	
2	*	11000.00	42.91	4.26	47.17	54.00	-6.83	AVG	

Test Mode UNII-2C/ TX A Mode 5500MHz

Polarization

Horizontal


Orthogonal Axis: Z

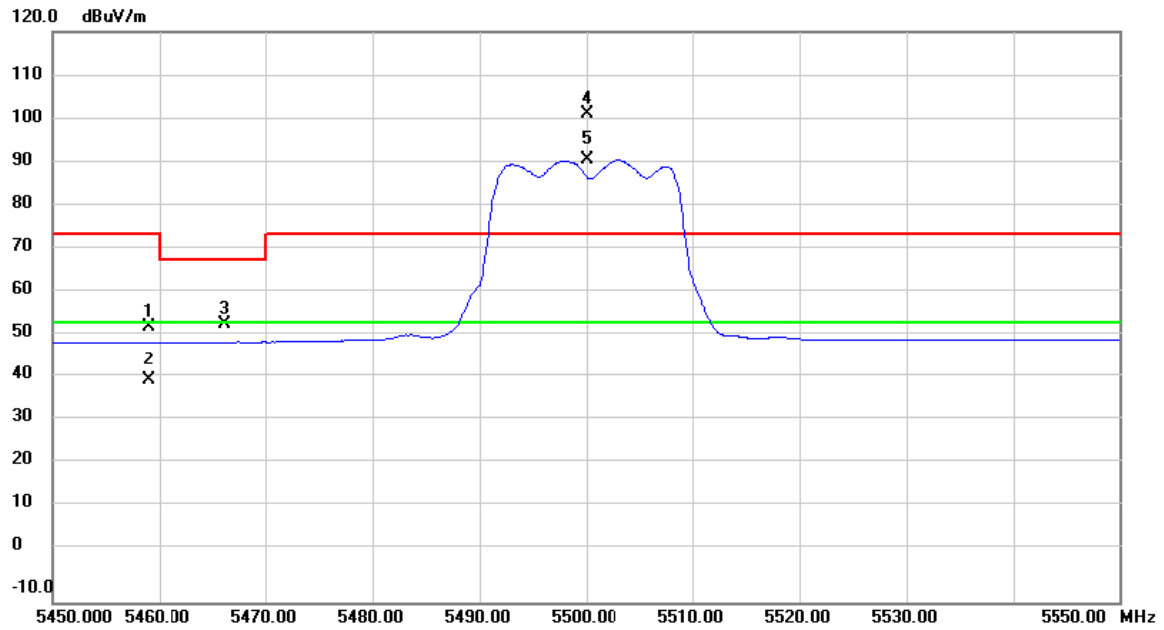

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5458.970	15.05	37.88	52.93	74.00	-21.07	peak	
2		5458.970	2.53	37.88	40.41	54.00	-13.59	AVG	
3		5466.250	15.73	37.88	53.61	68.20	-14.59	peak	
4	X	5500.000	63.46	37.92	101.38	74.00	27.38	peak	No Limit
5	*	5500.000	52.91	37.92	90.83	54.00	36.83	AVG	No Limit

Test Mode	UNII-2C/ TX A Mode 5500MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

Orthogonal Axis: Z

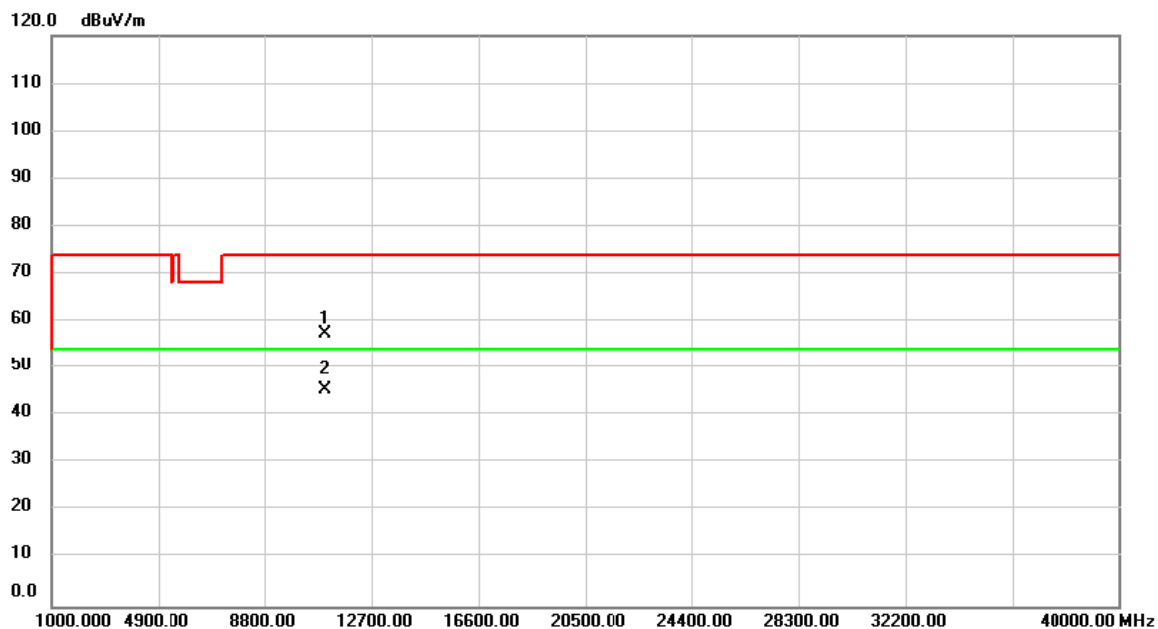


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	53.34	4.26	57.60	74.00	-16.40	peak	
2	*	11000.00	41.05	4.26	45.31	54.00	-8.69	AVG	

Test Mode UNII-2C/ TX A Mode 5580MHz

Polarization

Vertical


Orthogonal Axis: Z

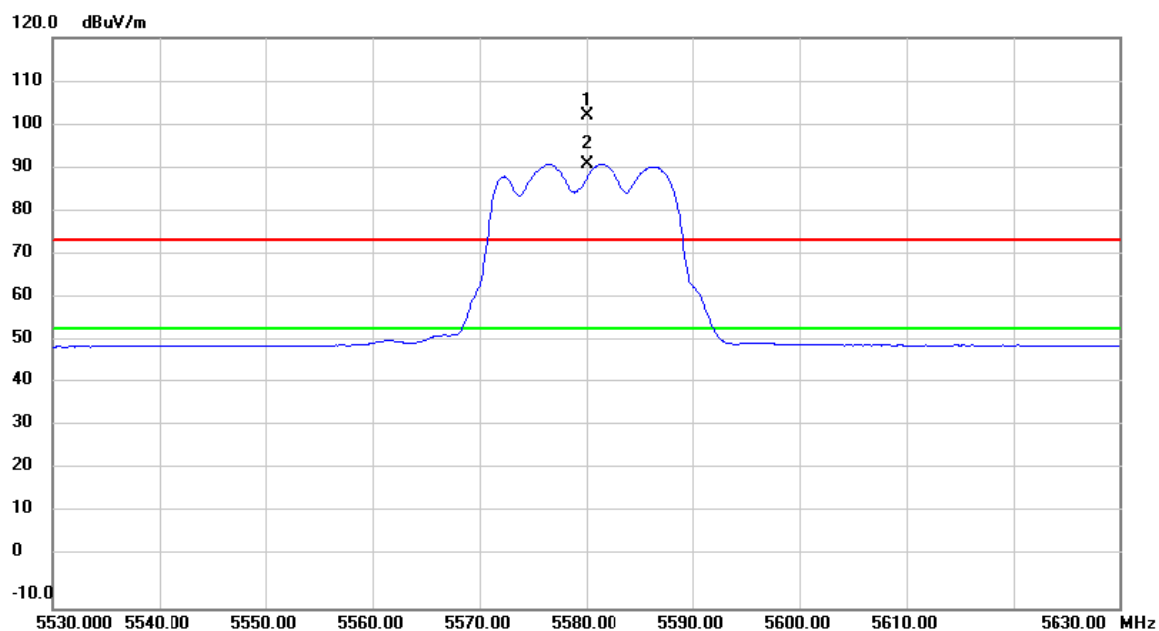

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5580.000	64.29	38.14	102.43	74.00	28.43	peak	No Limit
2	*	5580.000	53.16	38.14	91.30	54.00	37.30	AVG	No Limit

Test Mode	UNII-2C/ TX A Mode 5580MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: Z

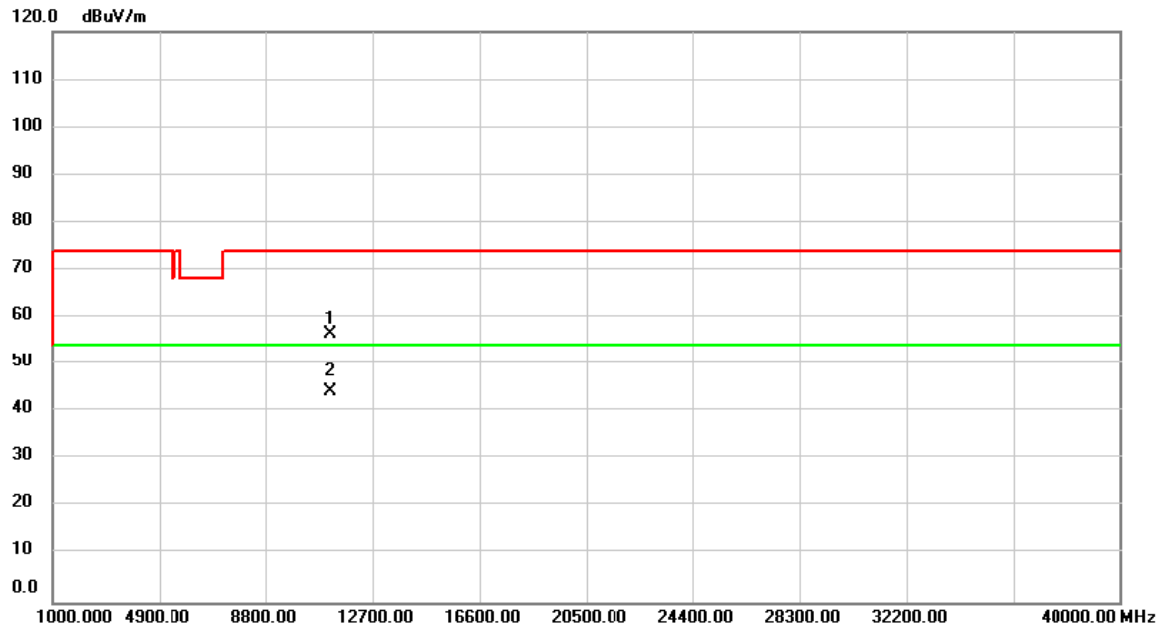


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	53.63	3.04	56.67	74.00	-17.33	peak	
2	*	11160.00	41.12	3.04	44.16	54.00	-9.84	AVG	

Test Mode UNII-2C/ TX A Mode 5580MHz

Polarization

Horizontal


Orthogonal Axis: Z

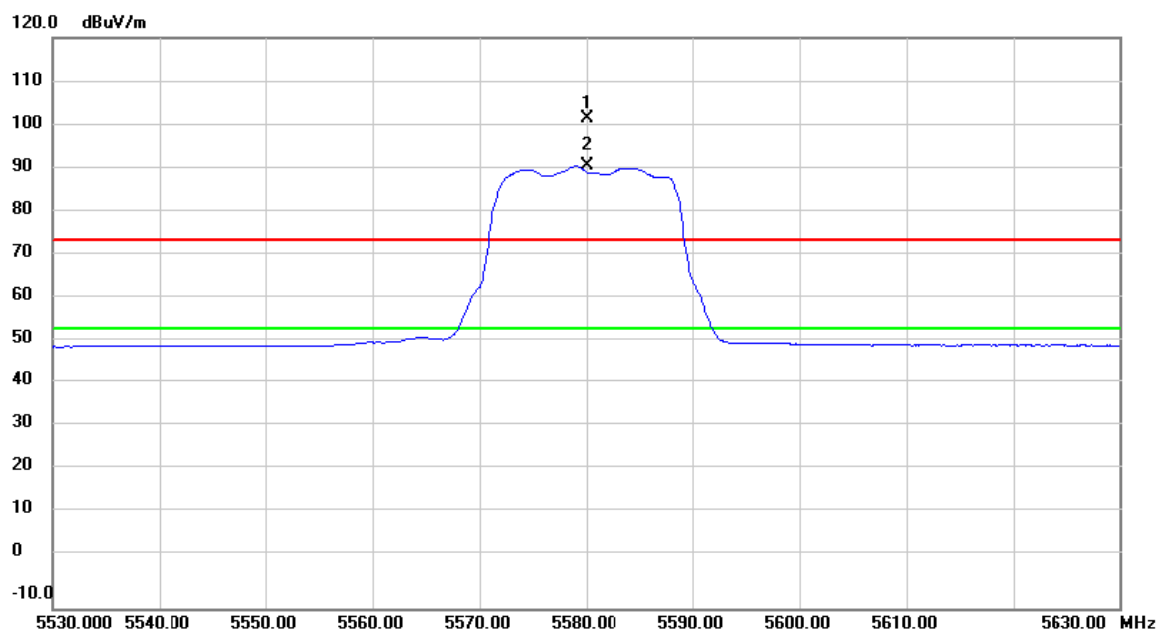

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5580.000	63.66	38.14	101.80	74.00	27.80	peak	No Limit
2	*	5580.000	52.68	38.14	90.82	54.00	36.82	AVG	No Limit

Test Mode	UNII-2C/ TX A Mode 5580MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

Orthogonal Axis: Z

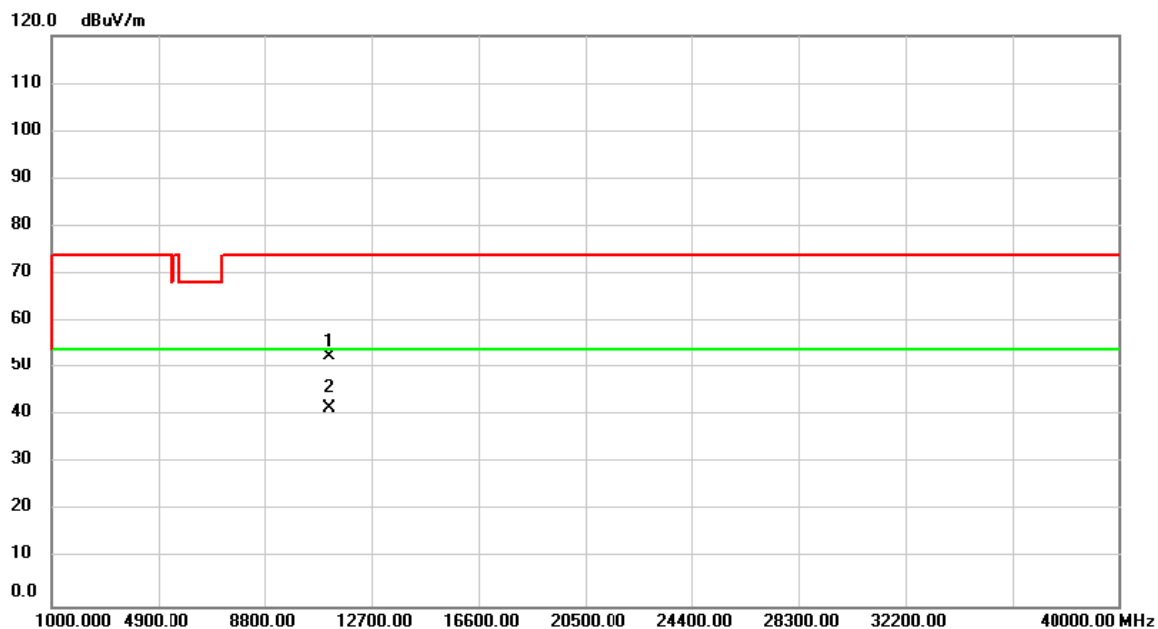


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	49.75	3.04	52.79	74.00	-21.21	peak	
2	*	11160.00	38.54	3.04	41.58	54.00	-12.42	AVG	

Test Mode UNII-2C/ TX A Mode 5700MHz

Polarization

Vertical


Orthogonal Axis: Z

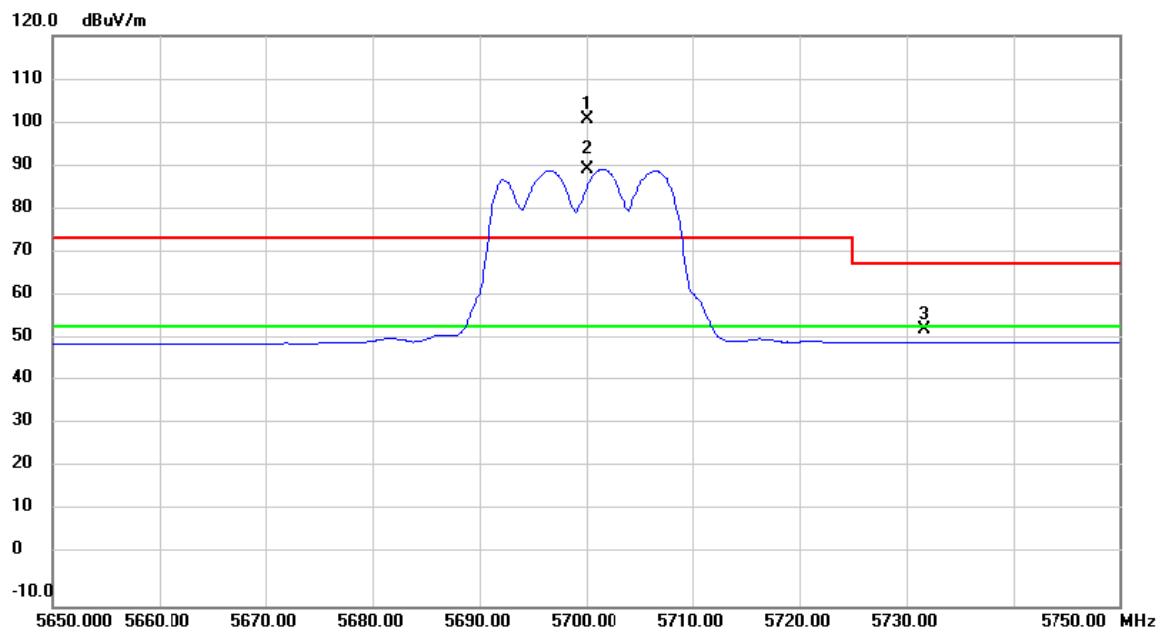

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	62.53	38.46	100.99	74.00	26.99	peak	No Limit
2	*	5700.000	51.23	38.46	89.69	54.00	35.69	AVG	No Limit
3		5731.700	14.79	38.55	53.34	68.20	-14.86	peak	

Test Mode	UNII-2C/ TX A Mode 5700MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: Z

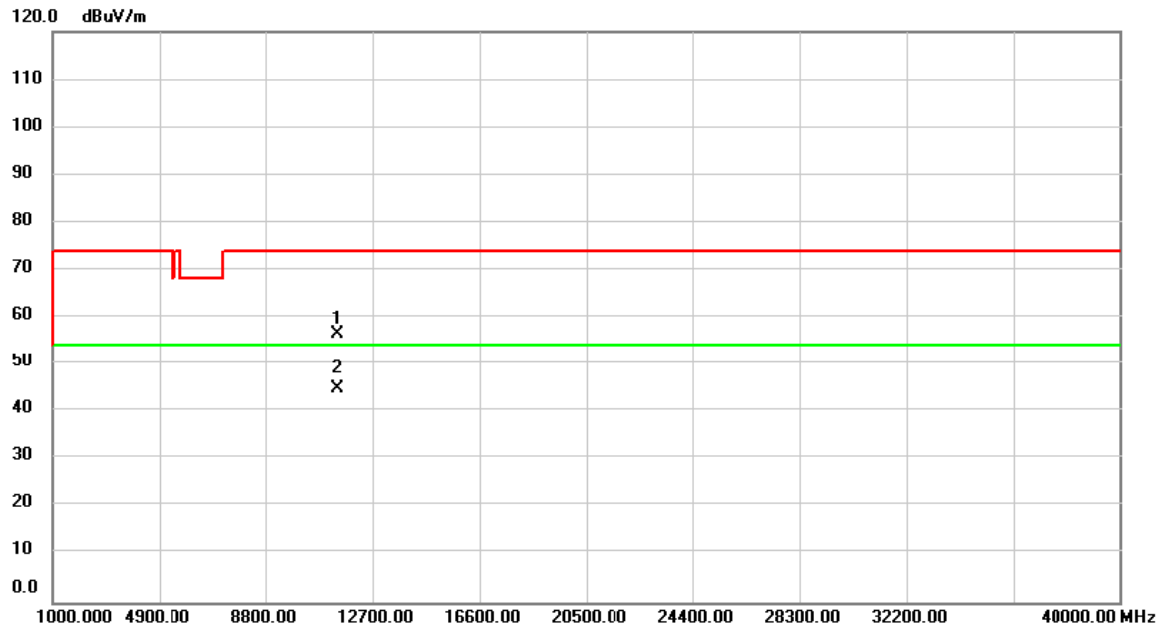


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	53.39	3.30	56.69	74.00	-17.31	peak	
2	*	11400.00	41.51	3.30	44.81	54.00	-9.19	AVG	

Test Mode UNII-2C/ TX A Mode 5700MHz

Polarization

Horizontal


Orthogonal Axis: Z

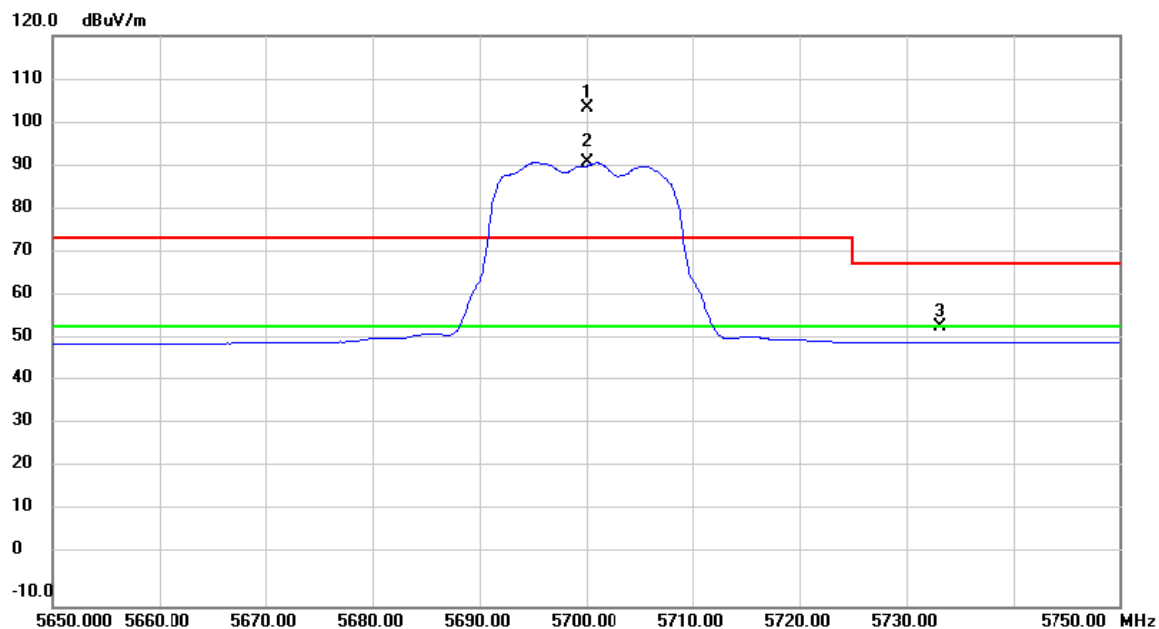

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	65.12	38.46	103.58	74.00	29.58	peak	No Limit
2	*	5700.000	52.76	38.46	91.22	54.00	37.22	AVG	No Limit
3		5733.150	15.22	38.55	53.77	68.20	-14.43	peak	

Test Mode	UNII-2C/ TX A Mode 5700MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------


Orthogonal Axis: Z

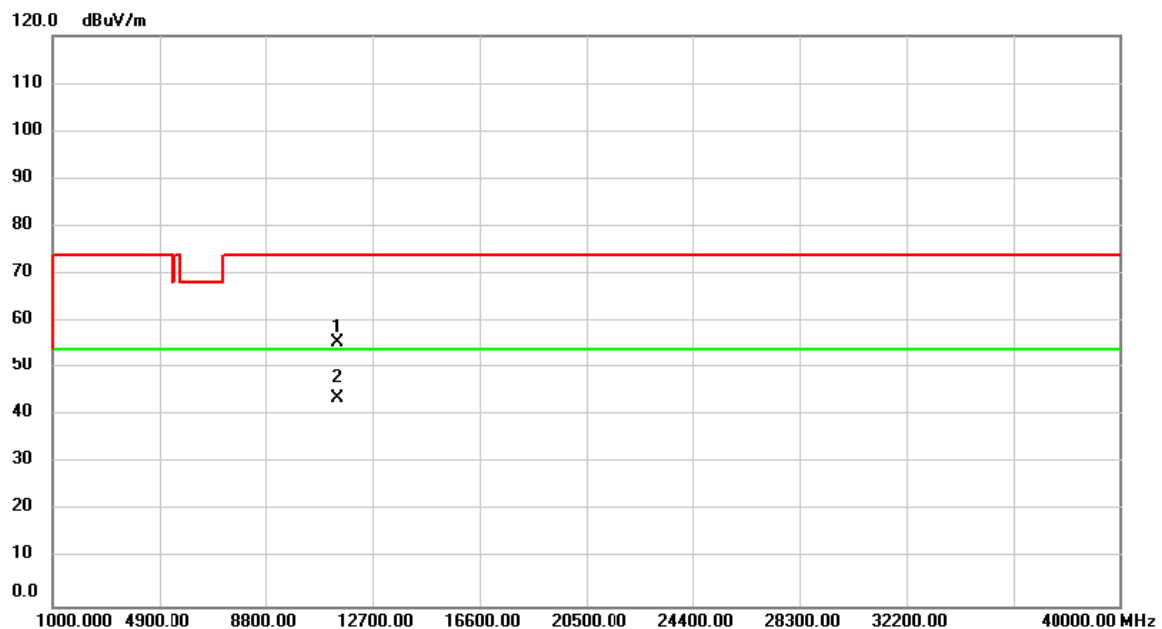

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	52.23	3.30	55.53	74.00	-18.47	peak	
2	*	11400.00	40.24	3.30	43.54	54.00	-10.46	AVG	

Test Mode	UNII-2C/ TX N20 Mode 5500MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

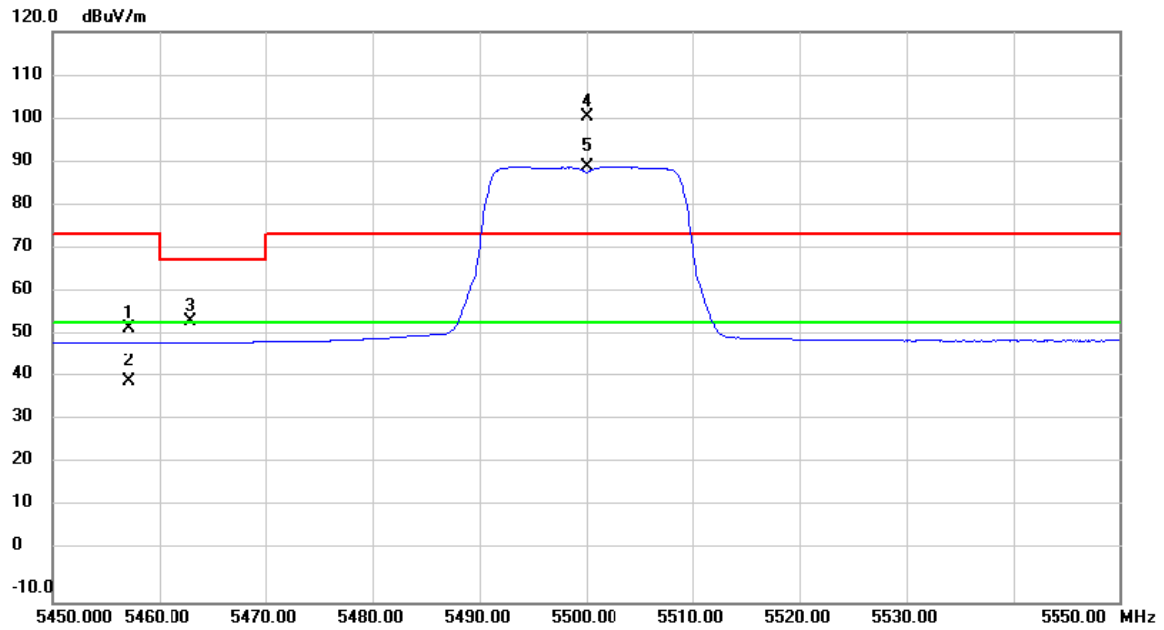

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5457.100	14.71	37.87	52.58	74.00	-21.42	peak	
2		5457.100	2.35	37.87	40.22	54.00	-13.78	AVG	
3		5462.940	16.43	37.88	54.31	68.20	-13.89	peak	
4	X	5500.000	62.64	37.92	100.56	74.00	26.56	peak	No Limit
5	*	5500.000	51.36	37.92	89.28	54.00	35.28	AVG	No Limit

Test Mode	UNII-2C/ TX N20 Mode 5500MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

Orthogonal Axis: Z

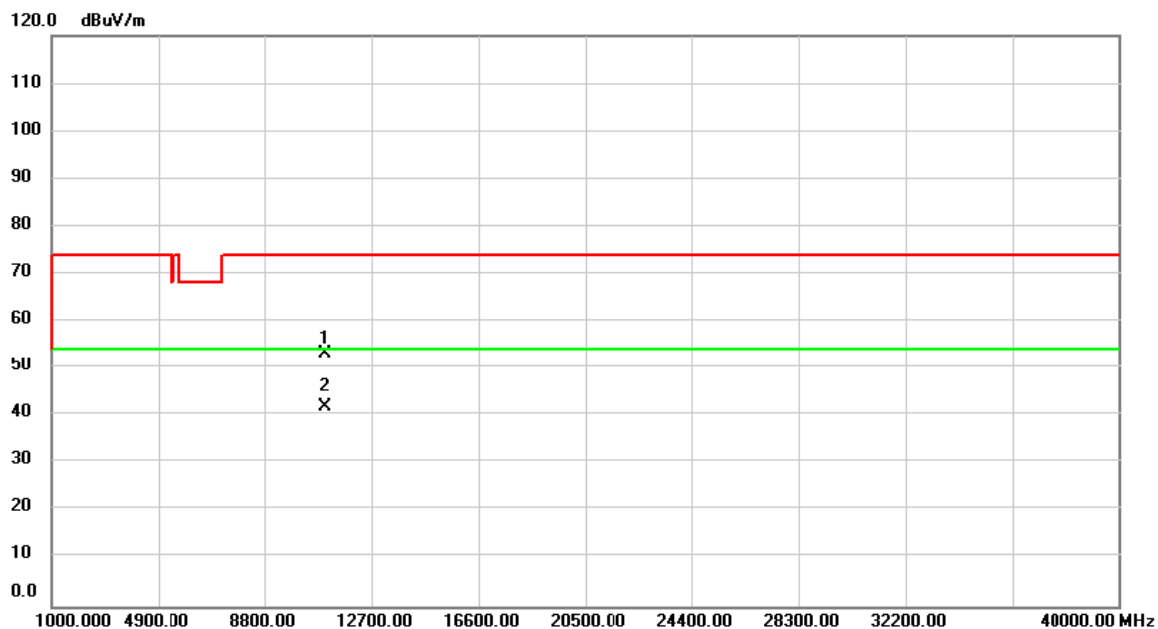


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	50.38	2.85	53.23	74.00	-20.77	peak	
2	*	11000.00	38.96	2.85	41.81	54.00	-12.19	AVG	

Test Mode UNII-2C/ TX N20 Mode 5500MHz

Polarization

Horizontal


Orthogonal Axis: Z

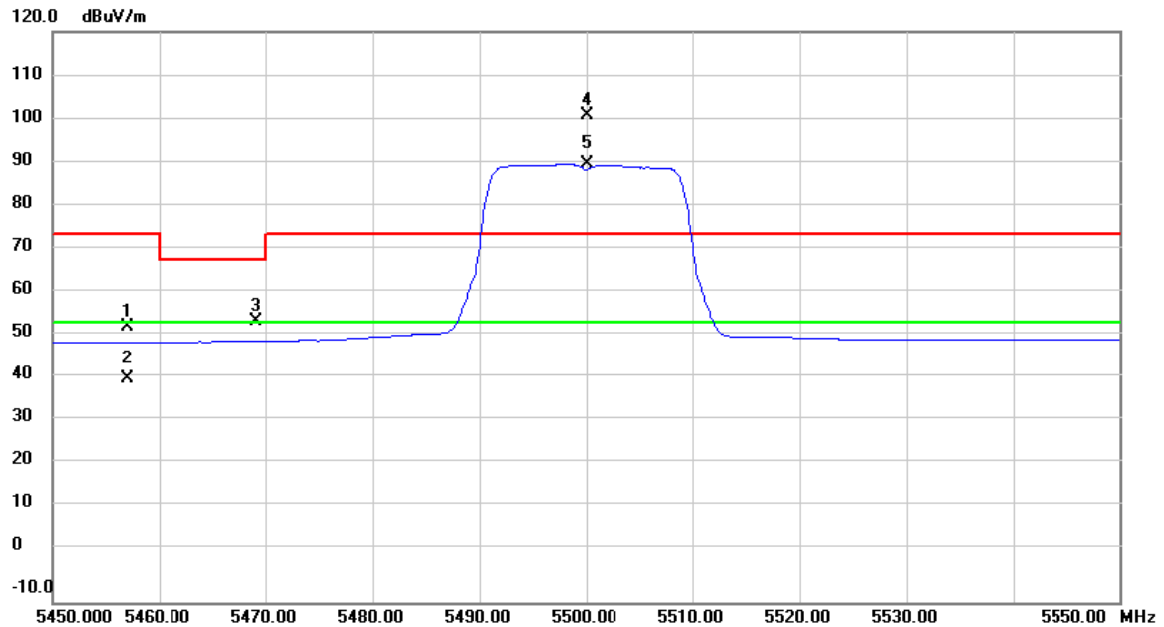

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5457.060	15.04	37.87	52.91	74.00	-21.09	peak	
2		5457.060	2.89	37.87	40.76	54.00	-13.24	AVG	
3		5469.120	16.42	37.89	54.31	68.20	-13.89	peak	
4	X	5500.000	63.21	37.92	101.13	74.00	27.13	peak	No Limit
5	*	5500.000	51.93	37.92	89.85	54.00	35.85	AVG	No Limit

Test Mode	UNII-2C/ TX N20 Mode 5500MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------


Orthogonal Axis: Z

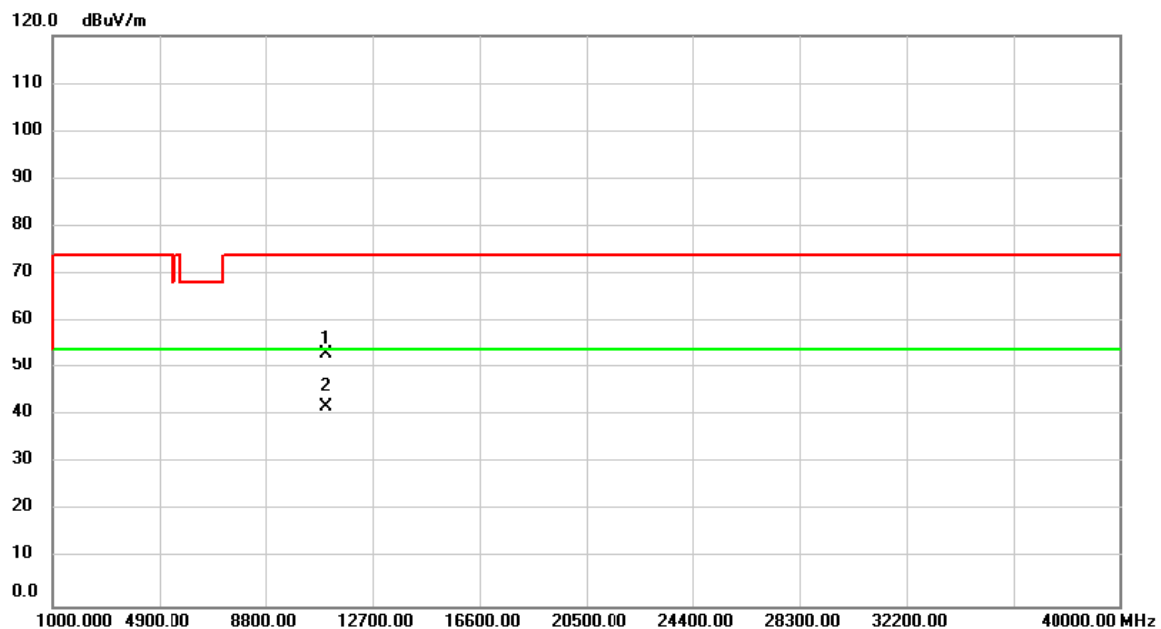

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	50.53	2.85	53.38	74.00	-20.62	peak	
2	*	11000.00	38.95	2.85	41.80	54.00	-12.20	AVG	

Test Mode	UNII-2C/ TX N20 Mode 5580MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

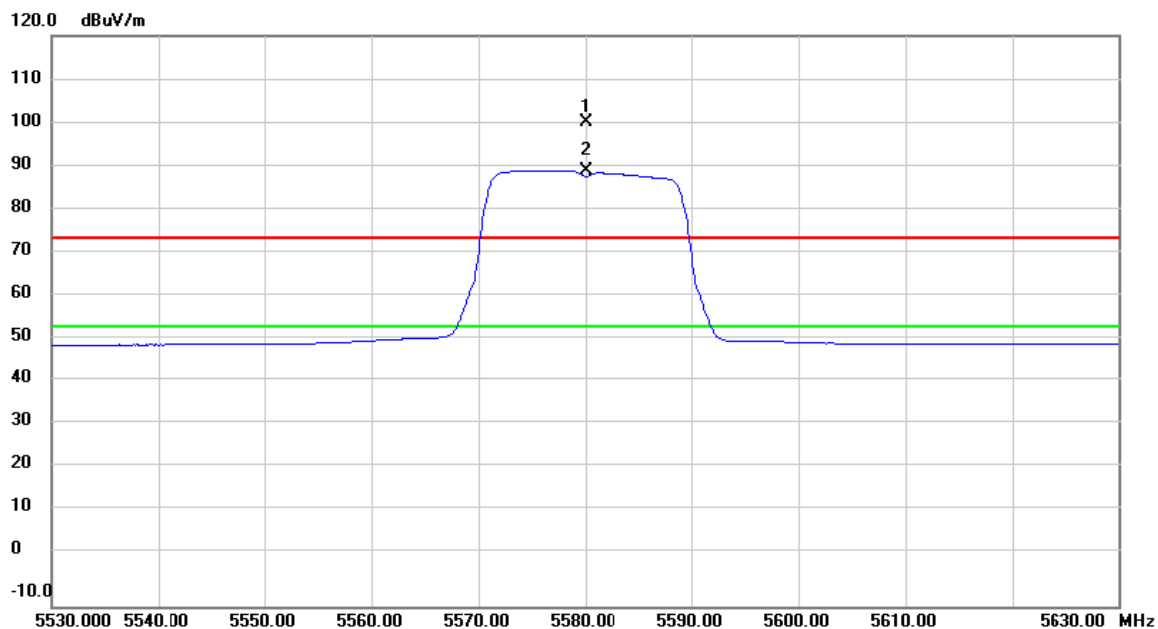

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5580.000	62.16	38.14	100.30	74.00	26.30	peak	No Limit
2	*	5580.000	51.21	38.14	89.35	54.00	35.35	AVG	No Limit

Test Mode	UNII-2C/ TX N20 Mode 5580MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

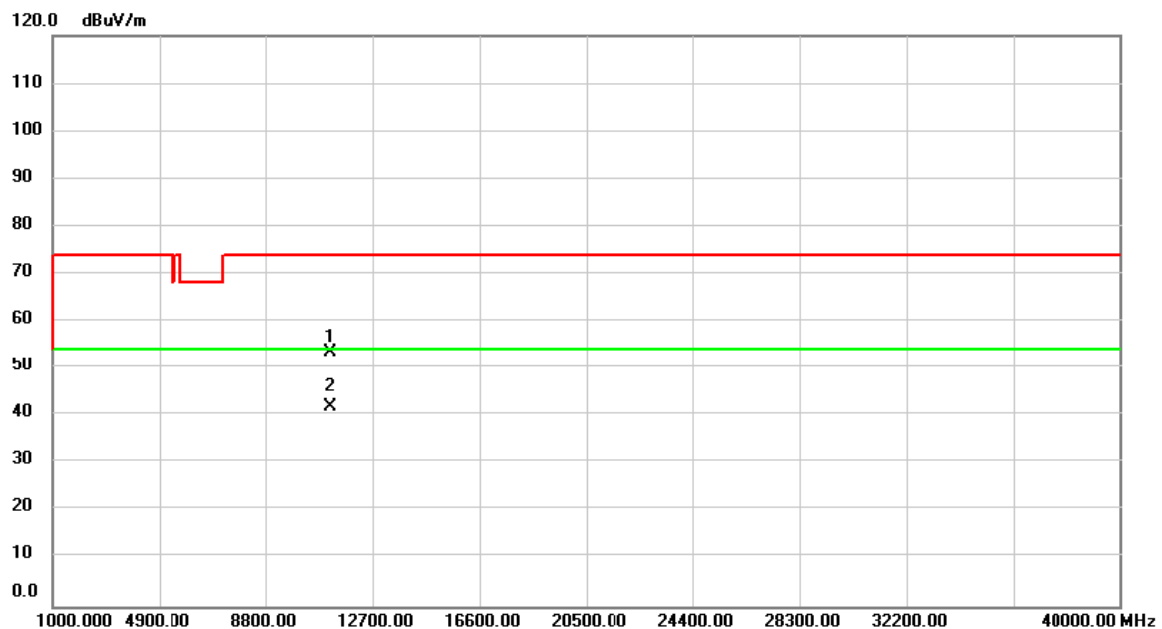

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	50.48	3.04	53.52	74.00	-20.48	peak	
2	*	11160.00	38.66	3.04	41.70	54.00	-12.30	AVG	

Test Mode	UNII-2C/ TX N20 Mode 5580MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------


Orthogonal Axis: Z

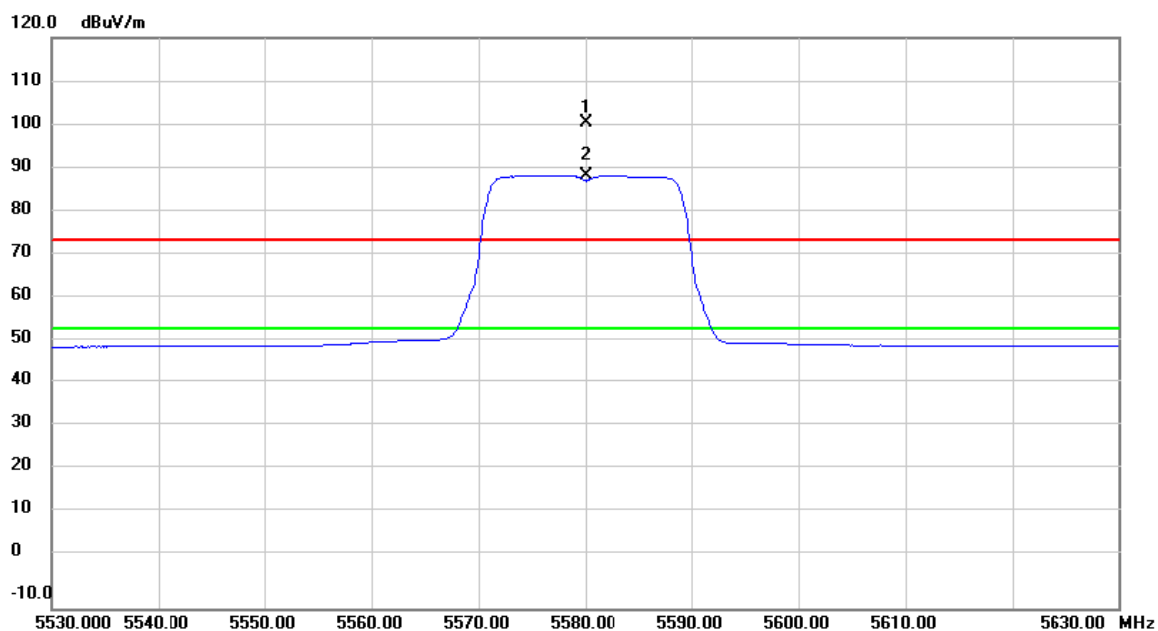

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5580.000	62.46	38.14	100.60	74.00	26.60	peak	No Limit
2	*	5580.000	50.59	38.14	88.73	54.00	34.73	AVG	No Limit

Test Mode	UNII-2C/ TX N20 Mode 5580MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------


Orthogonal Axis: Z

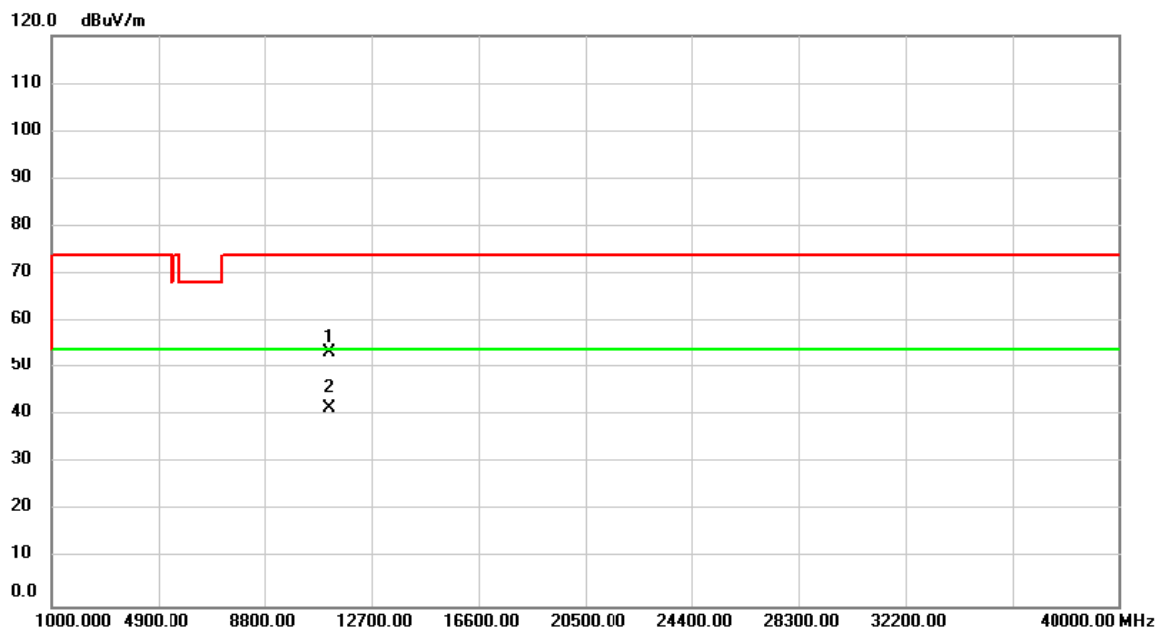

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	50.55	3.04	53.59	74.00	-20.41	peak	
2	*	11160.00	38.63	3.04	41.67	54.00	-12.33	AVG	

Test Mode	UNII-2C/ TX N20 Mode 5700MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

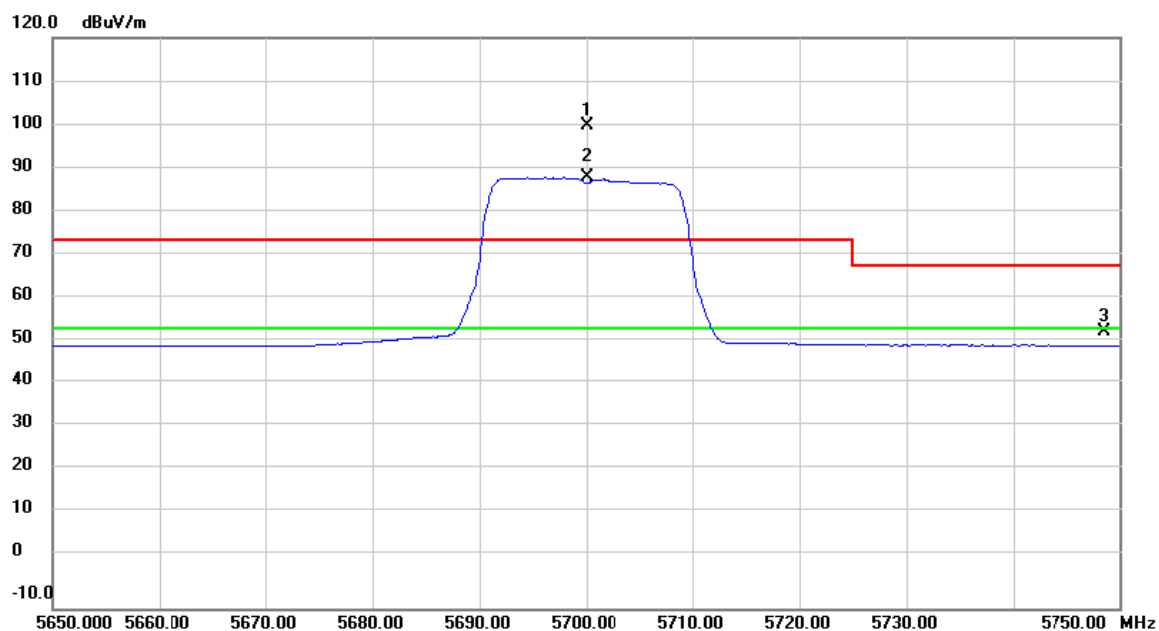

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	61.57	38.46	100.03	74.00	26.03	peak	No Limit
2	*	5700.000	49.77	38.46	88.23	54.00	34.23	AVG	No Limit
3		5748.550	14.66	38.60	53.26	68.20	-14.94	peak	

Test Mode	UNII-2C/ TX N20 Mode 5700MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

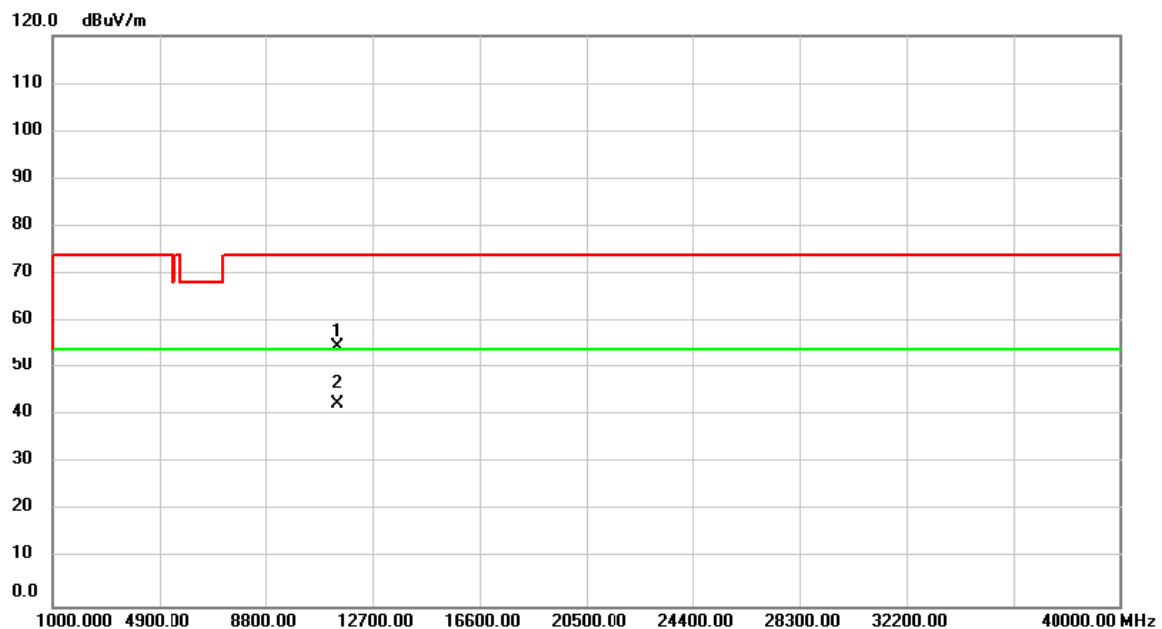

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	51.36	3.30	54.66	74.00	-19.34	peak	
2	*	11400.00	39.10	3.30	42.40	54.00	-11.60	AVG	

Test Mode	UNII-2C/ TX N20 Mode 5700MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------


Orthogonal Axis: Z

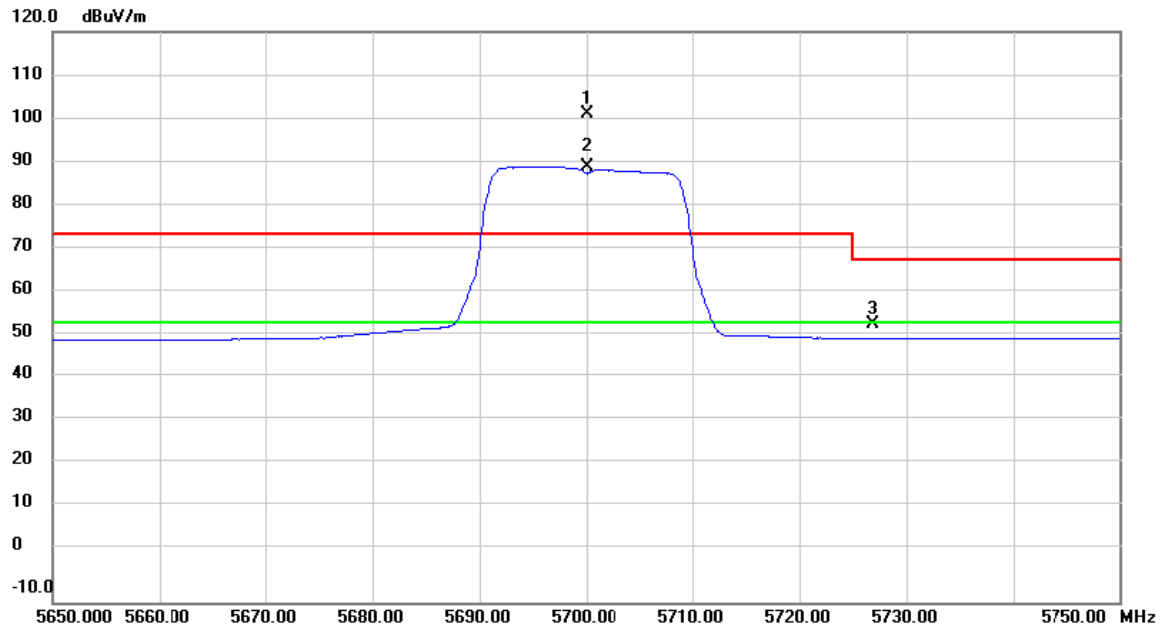

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	62.77	38.46	101.23	74.00	27.23	peak	No Limit
2	*	5700.000	50.92	38.46	89.38	54.00	35.38	AVG	No Limit
3		5726.850	14.96	38.53	53.49	68.20	-14.71	peak	

Test Mode	UNII-2C/ TX N20 Mode 5700MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

Orthogonal Axis: Z

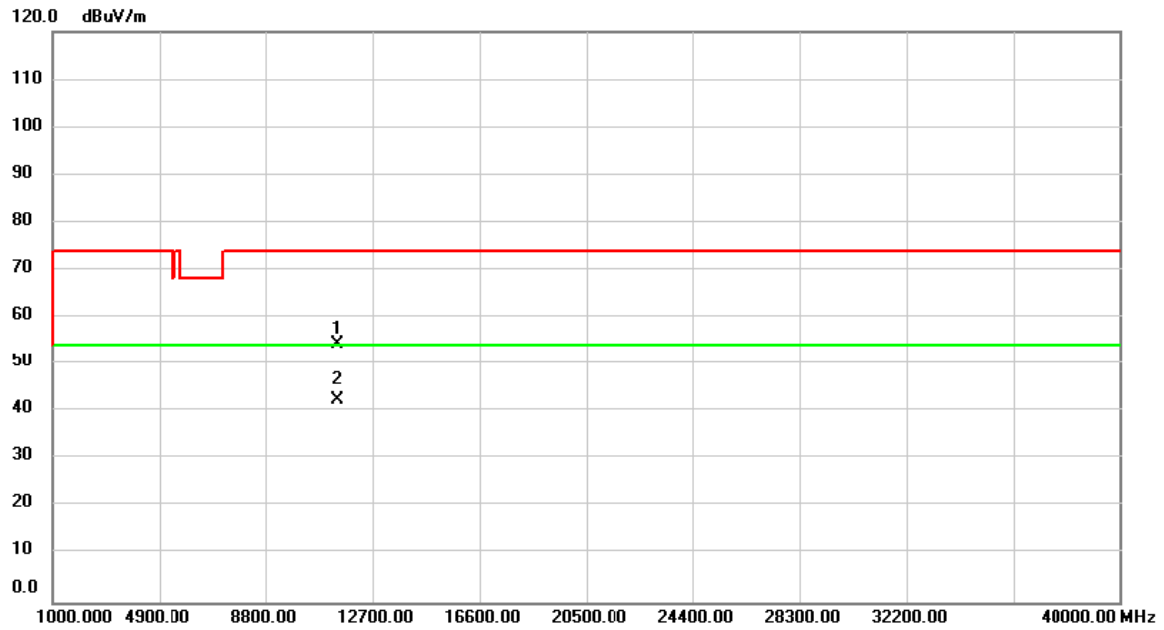


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	51.05	3.30	54.35	74.00	-19.65	peak	
2	*	11400.00	39.10	3.30	42.40	54.00	-11.60	AVG	

Test Mode UNII-2C/ TX AC80 Mode 5530MHz

Polarization

Vertical


Orthogonal Axis: Z

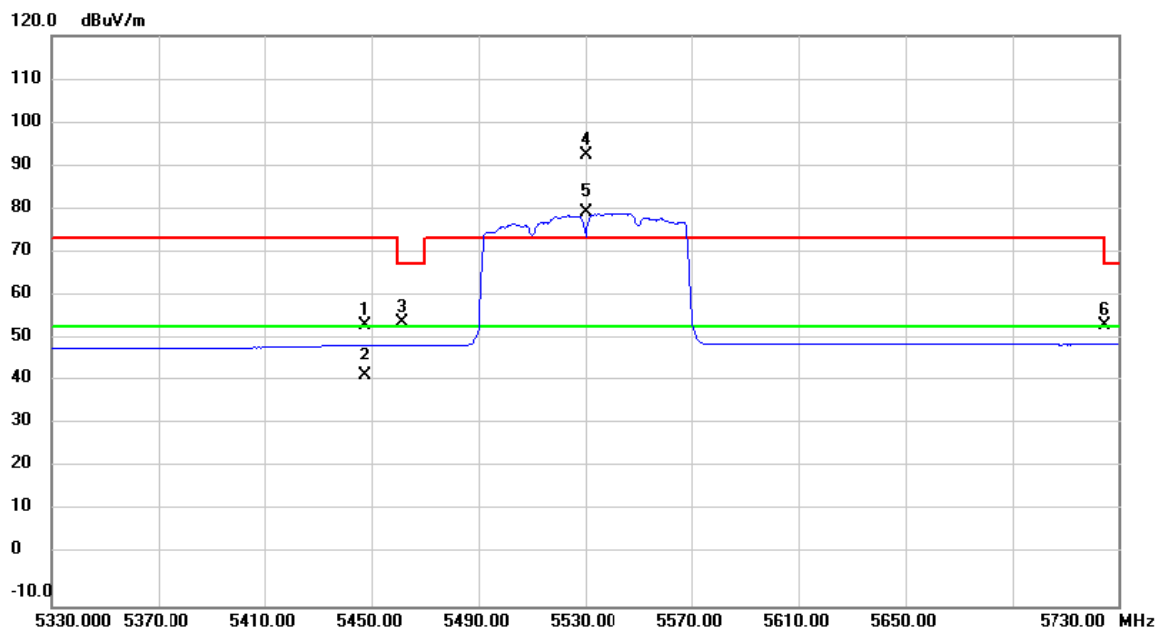

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5447.520	16.36	37.86	54.22	74.00	-19.78	peak	
2		5447.520	4.75	37.86	42.61	54.00	-11.39	AVG	
3		5461.380	16.91	37.88	54.79	68.20	-13.41	peak	
4	X	5530.000	54.80	38.00	92.80	74.00	18.80	peak	No Limit
5	*	5530.000	41.72	38.00	79.72	54.00	25.72	AVG	No Limit
6		5725.050	15.52	38.53	54.05	68.20	-14.15	peak	

Test Mode	UNII-2C/ TX AC80 Mode 5530MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

Orthogonal Axis: Z

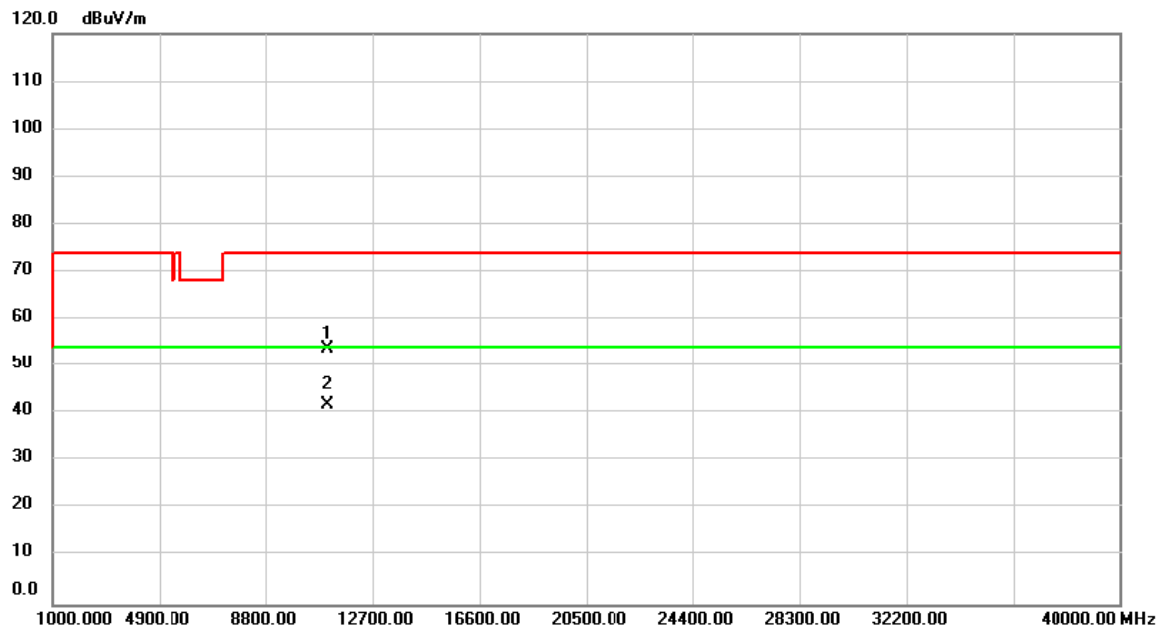


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	50.90	2.92	53.82	74.00	-20.18	peak	
2	*	11060.00	38.78	2.92	41.70	54.00	-12.30	AVG	

Test Mode UNII-2C/ TX AC80 Mode 5530MHz

Polarization

Horizontal


Orthogonal Axis: Z

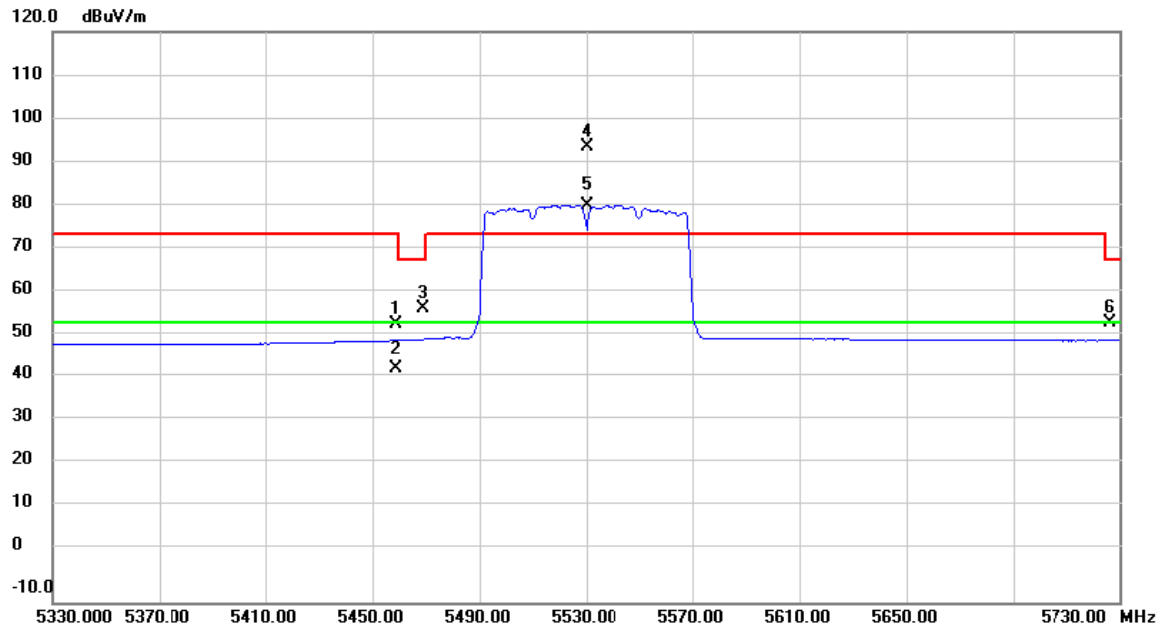

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5458.960	15.53	37.88	53.41	74.00	-20.59	peak	
2		5458.960	5.22	37.88	43.10	54.00	-10.90	AVG	
3		5469.120	19.14	37.89	57.03	68.20	-11.17	peak	
4	X	5530.000	55.96	38.00	93.96	74.00	19.96	peak	No Limit
5	*	5530.000	42.62	38.00	80.62	54.00	26.62	AVG	No Limit
6		5726.380	15.33	38.53	53.86	68.20	-14.34	peak	

Test Mode	UNII-2C/ TX AC80 Mode 5530MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

Orthogonal Axis: Z

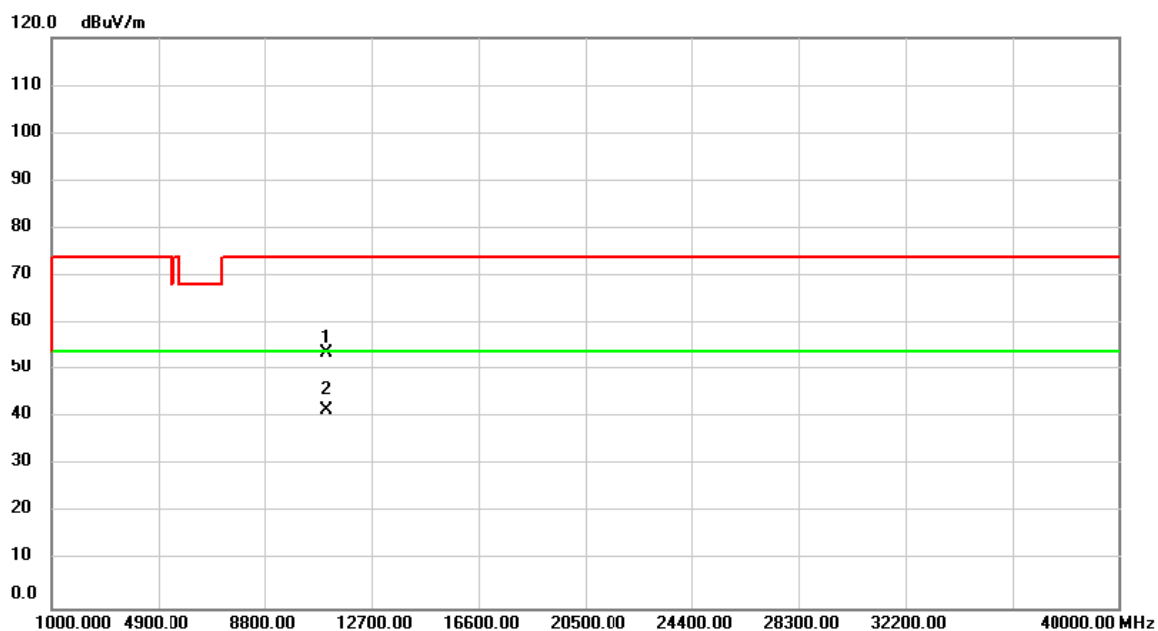


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	50.90	2.92	53.82	74.00	-20.18	peak	
2	*	11060.00	38.73	2.92	41.65	54.00	-12.35	AVG	

Test Mode UNII-2C/ TX AC80 Mode 5610MHz

Polarization

Vertical


Orthogonal Axis: Z

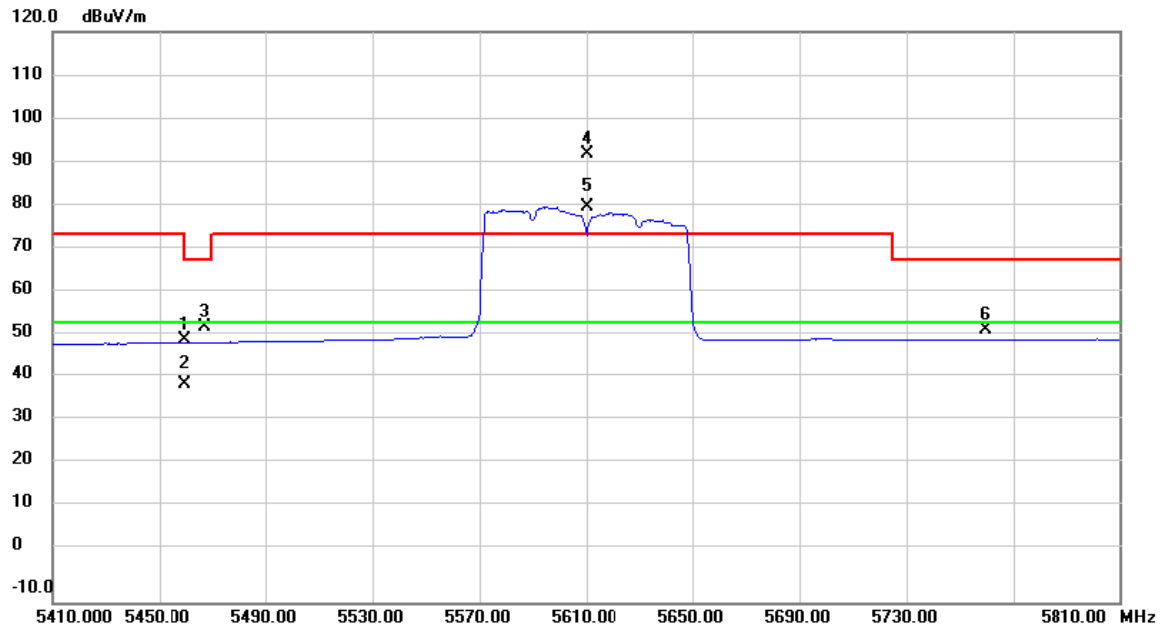

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5459.900	12.19	37.88	50.07	74.00	-23.93	peak	
2		5459.900	1.81	37.88	39.69	54.00	-14.31	AVG	
3		5467.270	15.02	37.88	52.90	68.20	-15.30	peak	
4	X	5610.000	54.10	38.22	92.32	74.00	18.32	peak	No Limit
5	*	5610.000	41.96	38.22	80.18	54.00	26.18	AVG	No Limit
6		5759.850	13.50	38.63	52.13	68.20	-16.07	peak	

Test Mode	UNII-2C/ TX AC80 Mode 5610MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------


Orthogonal Axis: Z

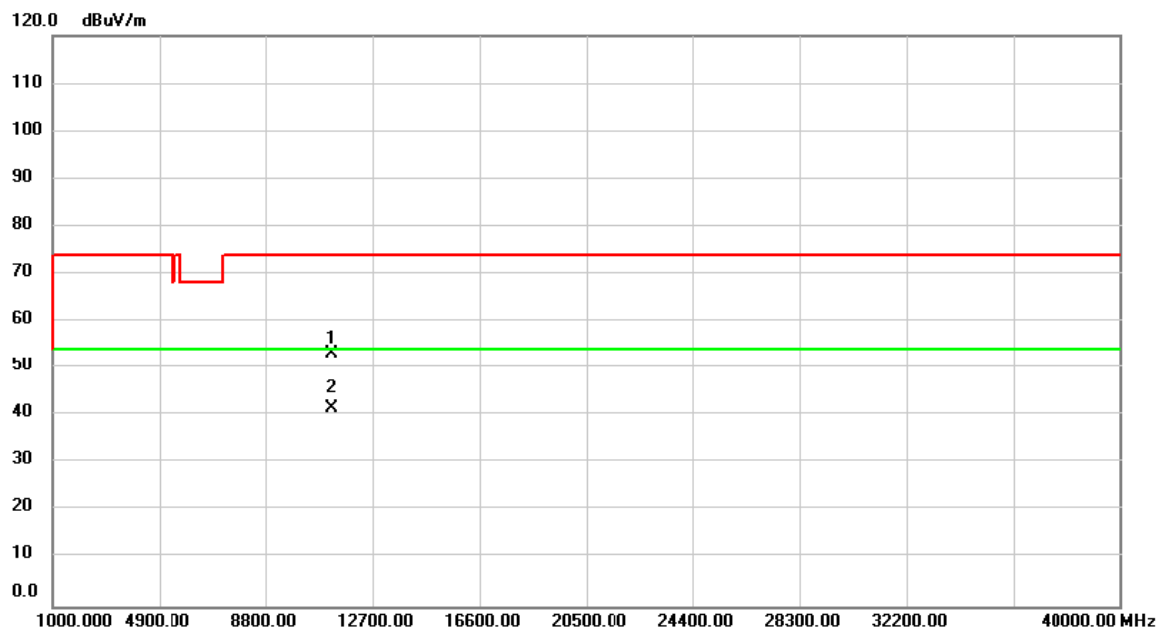

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	50.10	3.10	53.20	74.00	-20.80	peak	
2	*	11220.00	38.56	3.10	41.66	54.00	-12.34	AVG	

Test Mode	UNII-2C/ TX AC80 Mode 5610MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------


Orthogonal Axis: Z

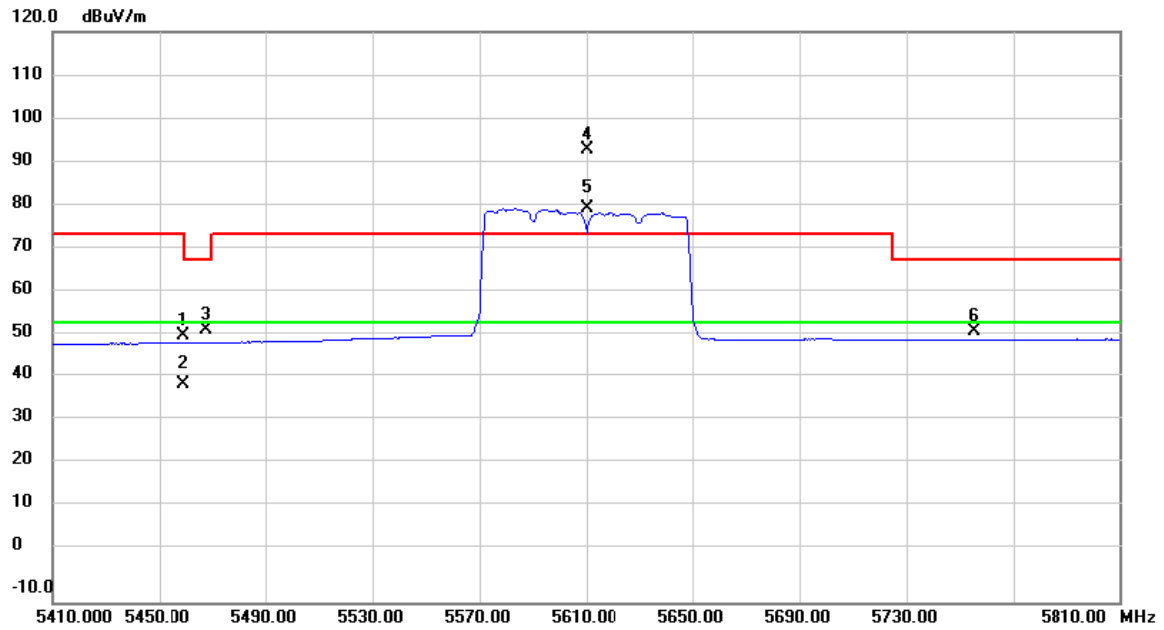

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5459.550	13.03	37.88	50.91	74.00	-23.09	peak	
2		5459.550	1.79	37.88	39.67	54.00	-14.33	AVG	
3		5467.920	14.35	37.88	52.23	68.20	-15.97	peak	
4	X	5610.000	54.93	38.22	93.15	74.00	19.15	peak	No Limit
5	*	5610.000	41.60	38.22	79.82	54.00	25.82	AVG	No Limit
6		5755.260	13.42	38.62	52.04	68.20	-16.16	peak	

Test Mode	UNII-2C/ TX AC80 Mode 5610MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

Orthogonal Axis: Z

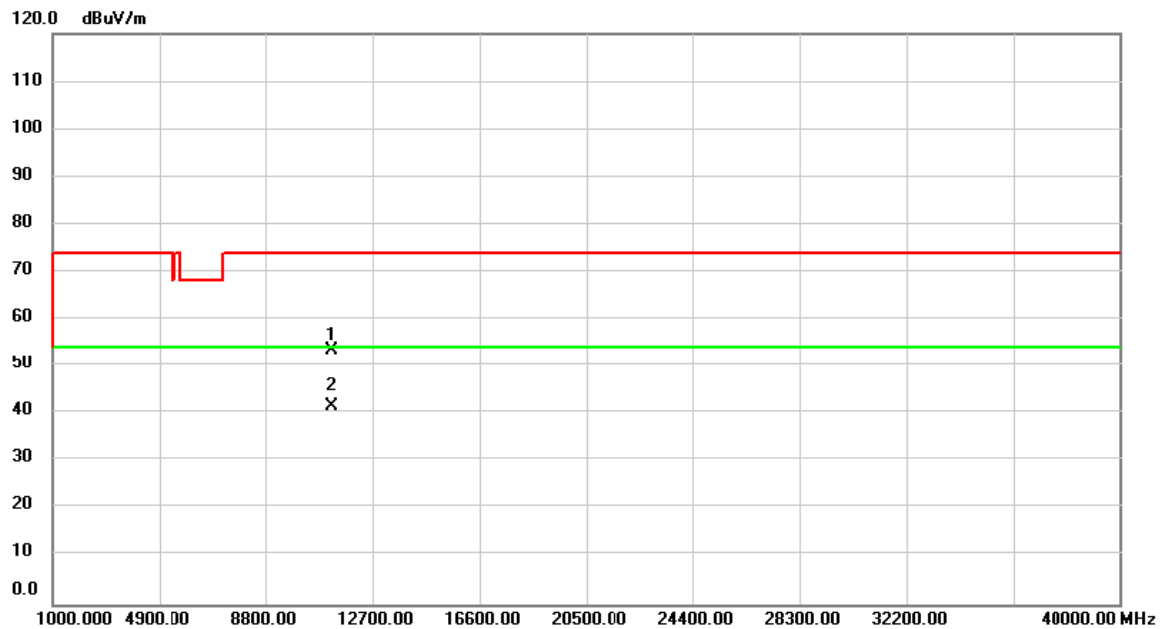


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	50.42	3.10	53.52	74.00	-20.48	peak	
2	*	11220.00	38.58	3.10	41.68	54.00	-12.32	AVG	

Test Mode UNII-3/ TX A Mode 5745MHz

Polarization

Vertical


Orthogonal Axis: Z

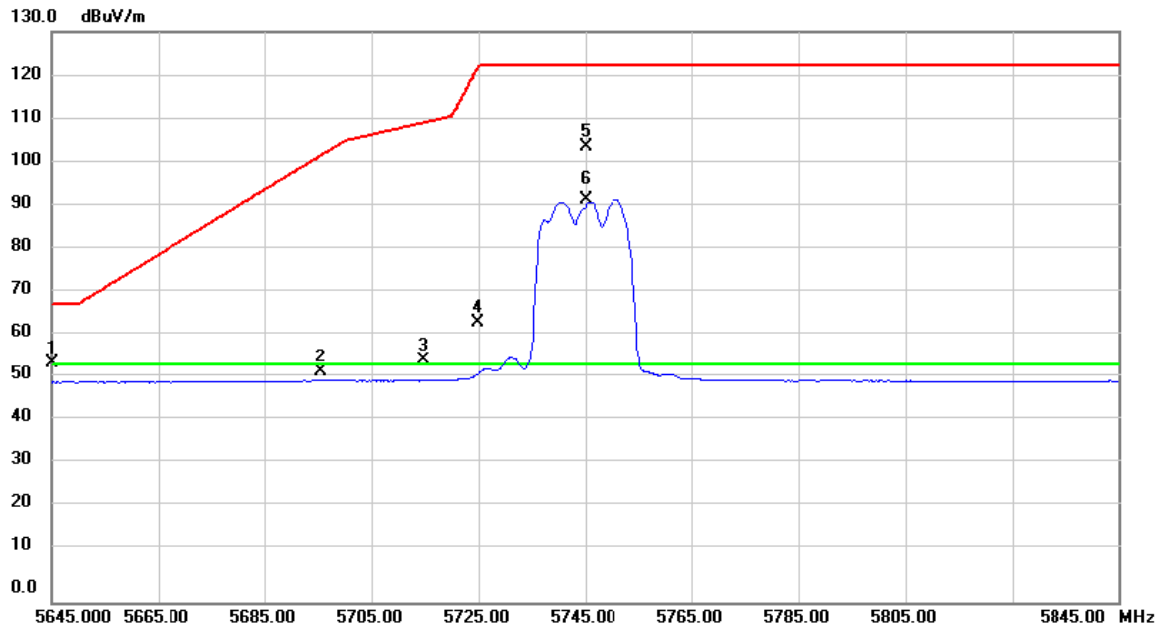

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5645.265	16.05	38.31	54.36	68.20	-13.84	peak	
2		5695.550	14.15	38.45	52.60	101.92	-49.32	peak	
3		5714.780	16.50	38.50	55.00	109.34	-54.34	peak	
4		5724.910	25.18	38.53	63.71	121.99	-58.28	peak	
5		5745.000	65.34	38.58	103.92	122.20	-18.28	peak	No Limit
6	*	5745.000	53.35	38.58	91.93	54.00	37.93	AVG	No Limit

Test Mode	UNII-3/ TX A Mode 5745MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

Orthogonal Axis: Z

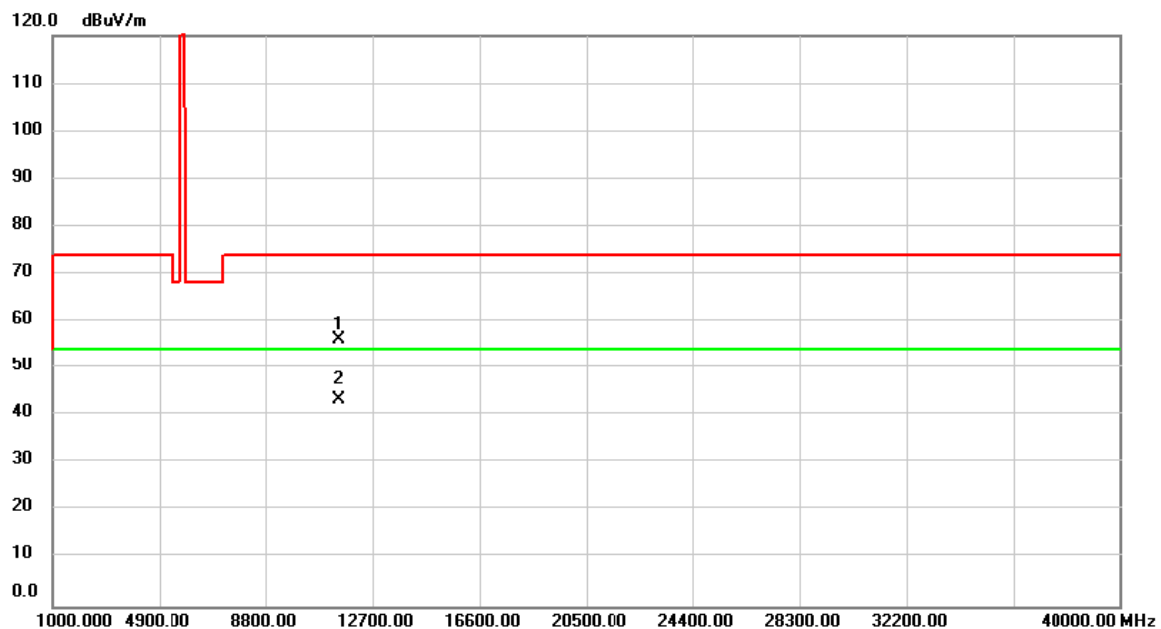


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	52.89	3.40	56.29	74.00	-17.71	peak	
2	*	11490.00	40.07	3.40	43.47	54.00	-10.53	AVG	

Test Mode UNII-3/ TX A Mode 5745MHz

Polarization

Horizontal


Orthogonal Axis: Z

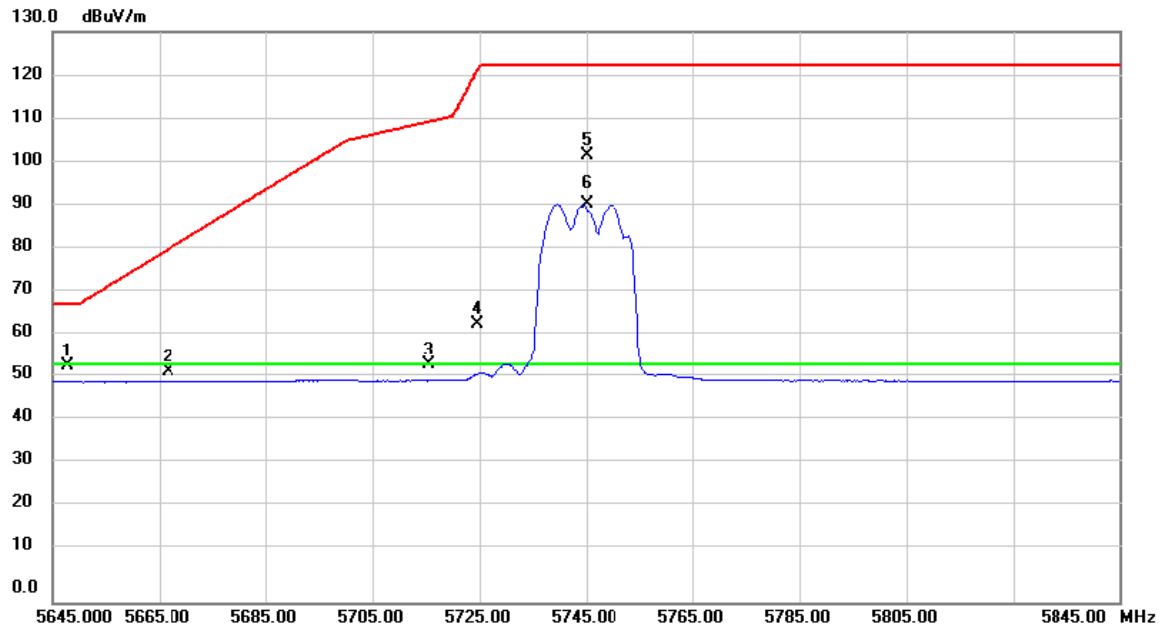

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5647.875	15.53	38.33	53.86	68.20	-14.34	peak	
2		5666.750	14.02	38.38	52.40	80.63	-28.23	peak	
3		5715.580	15.64	38.50	54.14	109.56	-55.42	peak	
4		5724.655	24.90	38.53	63.43	121.41	-57.98	peak	
5		5745.000	63.17	38.58	101.75	122.20	-20.45	peak	No Limit
6	*	5745.000	52.12	38.58	90.70	54.00	36.70	AVG	No Limit

Test Mode	UNII-3/ TX A Mode 5745MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

Orthogonal Axis: Z

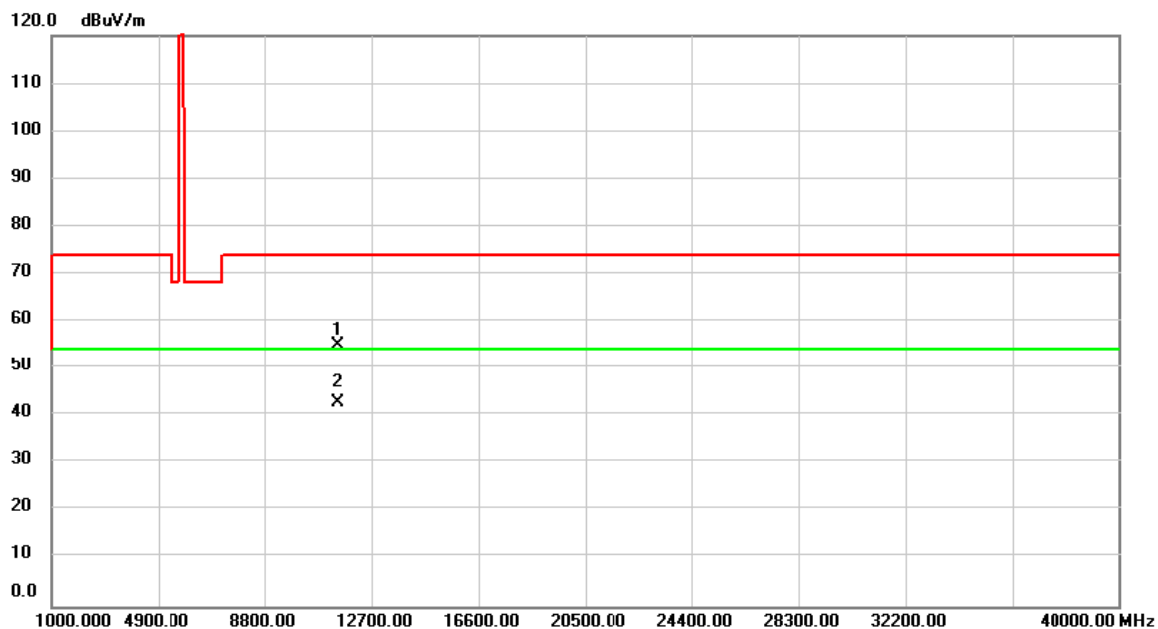


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	51.63	3.40	55.03	74.00	-18.97	peak	
2	*	11490.00	39.31	3.40	42.71	54.00	-11.29	AVG	

Test Mode UNII-3/ TX A Mode 5785MHz

Polarization

Vertical


Orthogonal Axis: Z

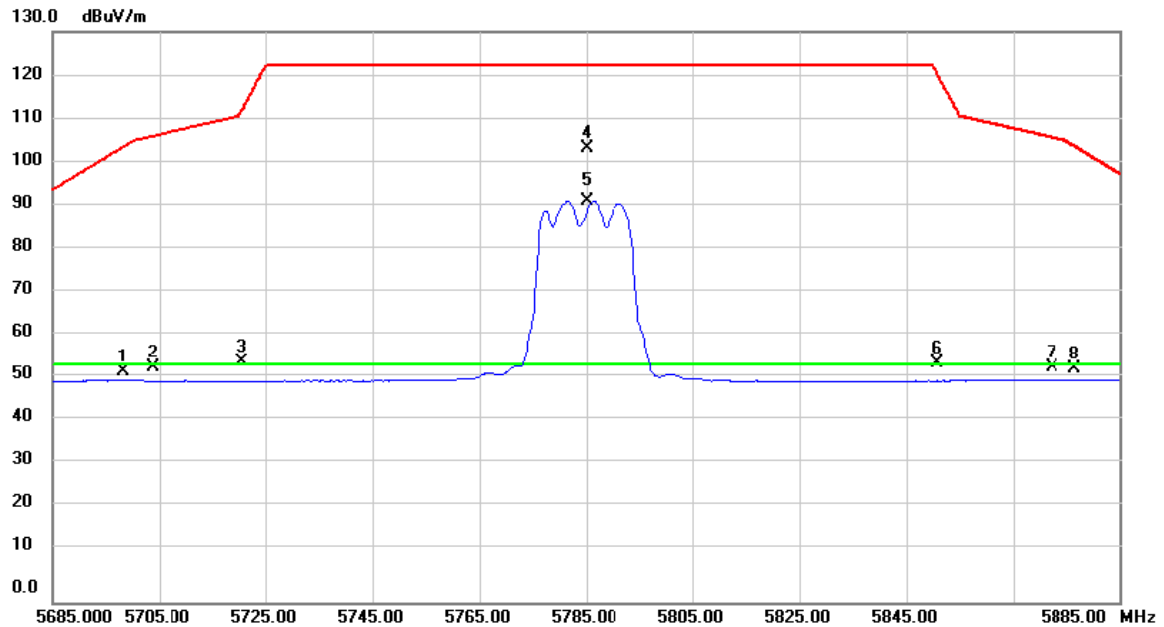

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5698.320	13.96	38.46	52.42	103.96	-51.54	peak	
2		5703.900	15.08	38.48	53.56	106.29	-52.73	peak	
3		5720.635	16.29	38.52	54.81	112.25	-57.44	peak	
4		5785.000	64.68	38.70	103.38	122.20	-18.82	peak	No Limit
5	*	5785.000	52.75	38.70	91.45	54.00	37.45	AVG	No Limit
6		5850.815	15.63	38.87	54.50	120.34	-65.84	peak	
7		5872.360	14.47	38.94	53.41	105.94	-52.53	peak	
8		5876.700	14.28	38.94	53.22	103.94	-50.72	peak	

Test Mode	UNII-3/ TX A Mode 5785MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

Orthogonal Axis: Z

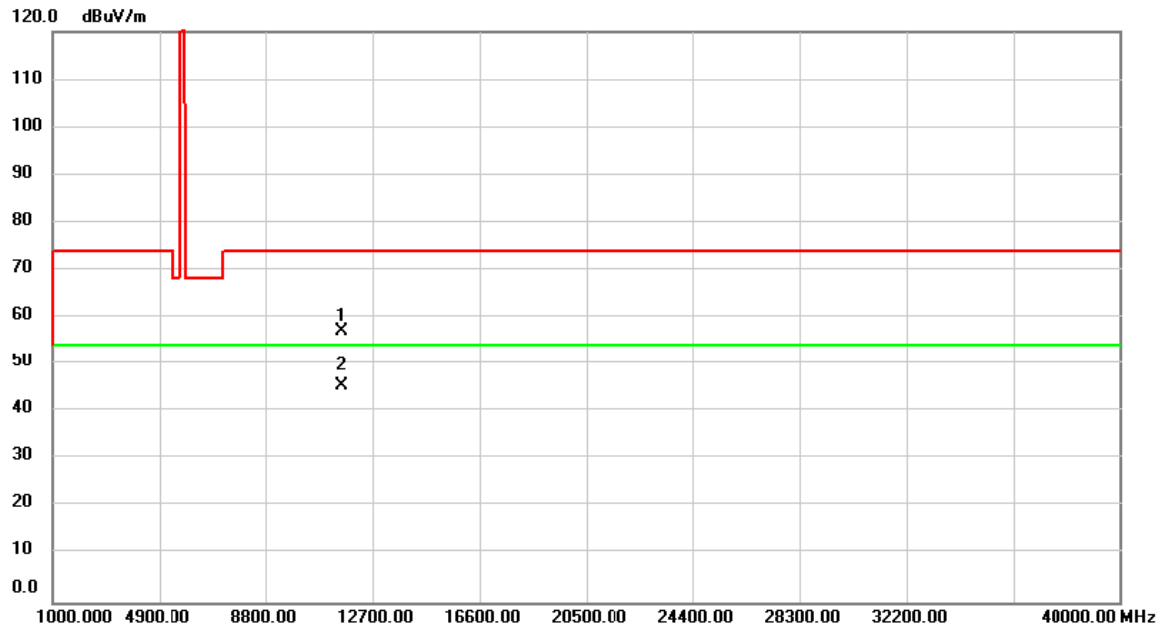


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	53.80	3.28	57.08	74.00	-16.92	peak	
2	*	11570.00	42.08	3.28	45.36	54.00	-8.64	AVG	

Test Mode UNII-3/ TX A Mode 5785MHz

Polarization

Horizontal


Orthogonal Axis: Z

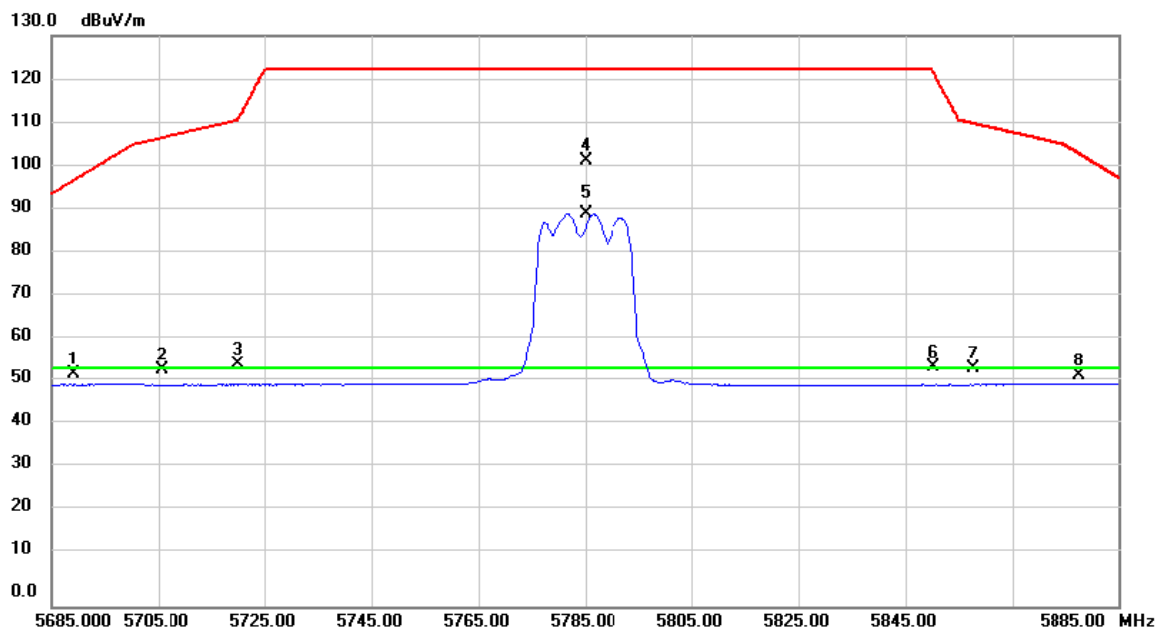

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5689.170	14.23	38.43	52.66	97.21	-44.55	peak	
2		5705.700	15.23	38.48	53.71	106.80	-53.09	peak	
3		5720.110	16.59	38.52	55.11	111.05	-55.94	peak	
4		5785.000	62.77	38.70	101.47	122.20	-20.73	peak	No Limit
5	*	5785.000	50.79	38.70	89.49	54.00	35.49	AVG	No Limit
6		5850.270	15.58	38.87	54.45	121.58	-67.13	peak	
7		5857.580	15.10	38.89	53.99	110.08	-56.09	peak	
8		5877.610	13.70	38.94	52.64	103.26	-50.62	peak	

Test Mode	UNII-3/ TX A Mode 5785MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

Orthogonal Axis: Z

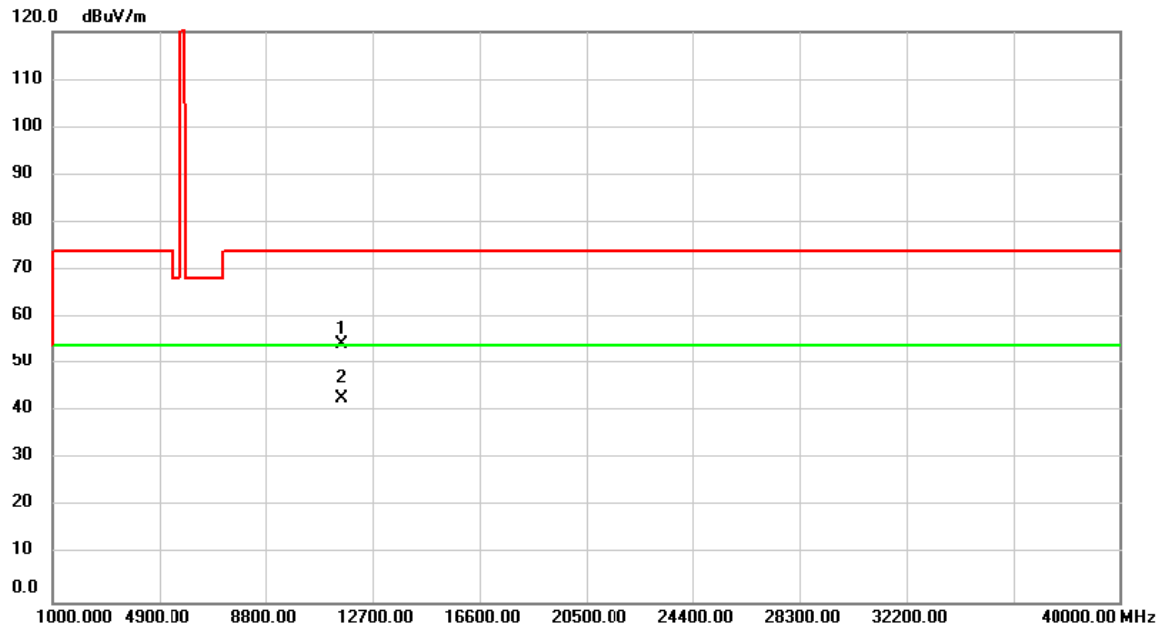


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	51.03	3.28	54.31	74.00	-19.69	peak	
2	*	11570.00	39.56	3.28	42.84	54.00	-11.16	AVG	

Test Mode UNII-3/ TX A Mode 5825MHz

Polarization

Vertical


Orthogonal Axis: Z

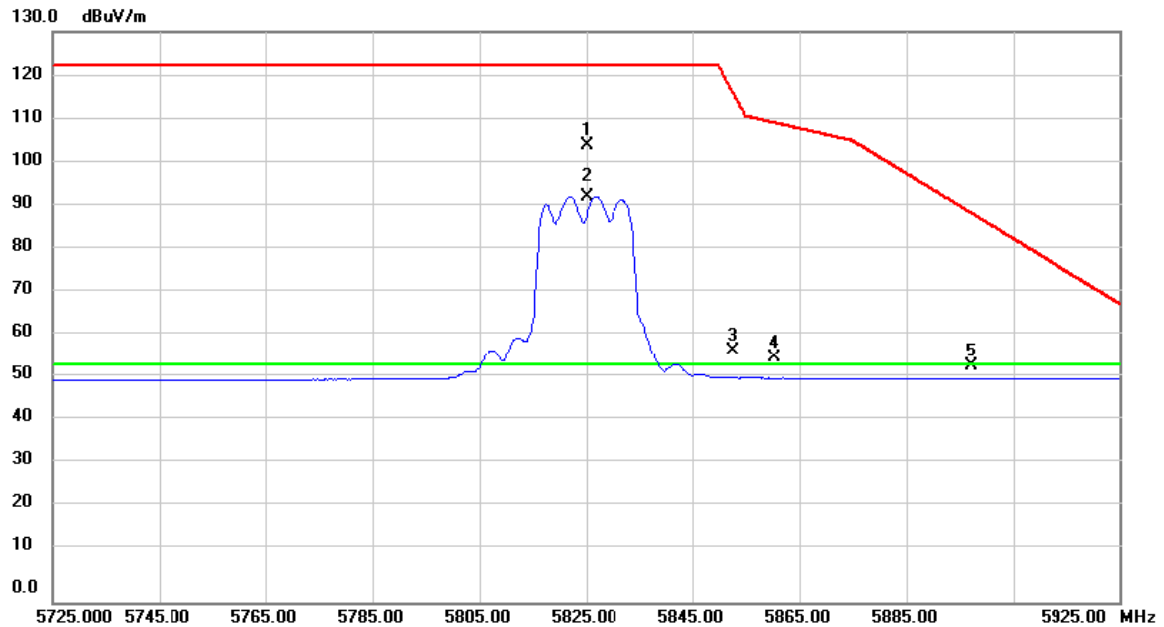

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5825.000	65.21	38.80	104.01	122.20	-18.19	peak	No Limit
2	*	5825.000	53.73	38.80	92.53	54.00	38.53	AVG	No Limit
3		5852.695	18.64	38.88	57.52	116.05	-58.53	peak	
4		5860.460	16.83	38.90	55.73	109.27	-53.54	peak	
5		5897.050	14.89	39.00	53.89	88.84	-34.95	peak	

Test Mode	UNII-3/ TX A Mode 5825MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

Orthogonal Axis: Z

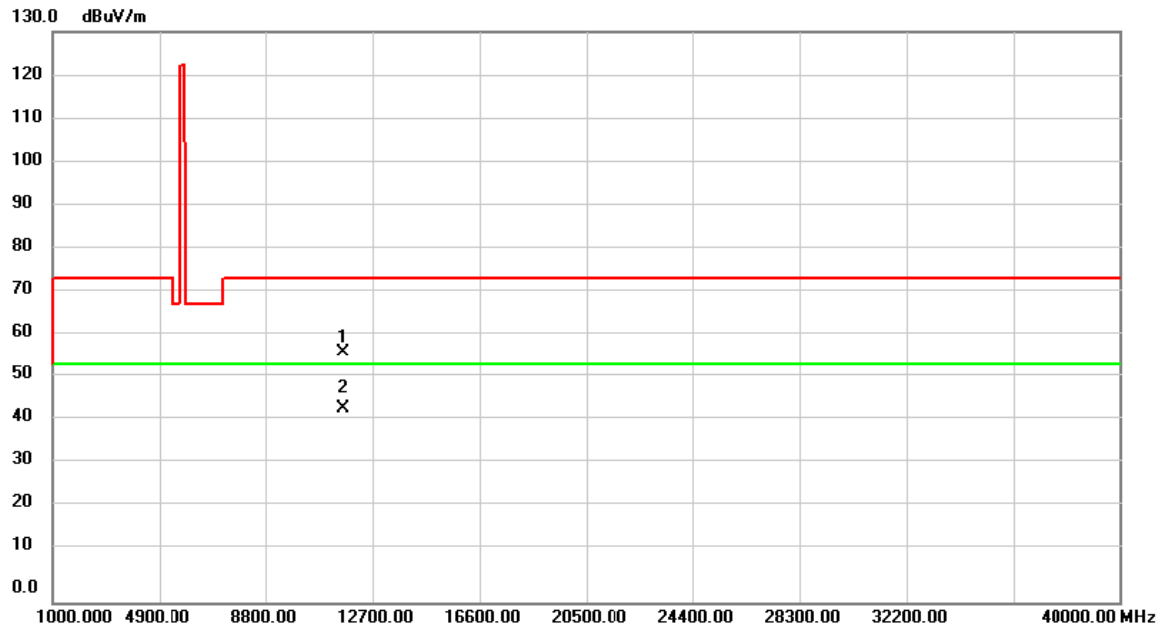


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	52.21	4.79	57.00	74.00	-17.00	peak	
2	*	11650.00	39.23	4.79	44.02	54.00	-9.98	AVG	

Test Mode UNII-3/ TX A Mode 5825MHz

Polarization

Horizontal


Orthogonal Axis: Z

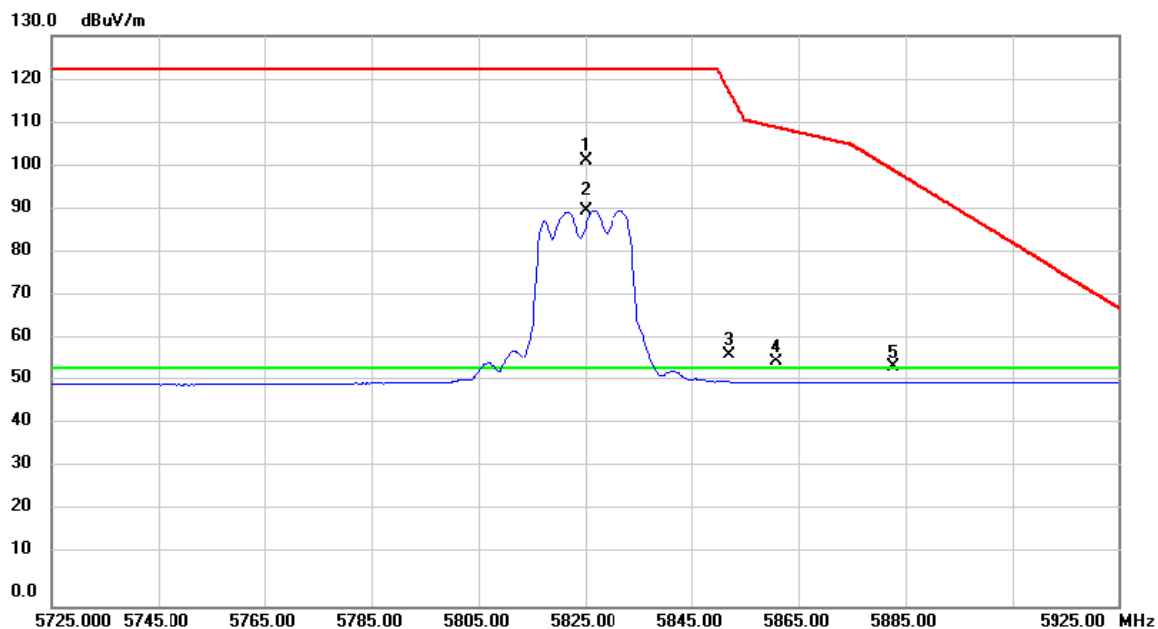

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5825.000	62.84	38.80	101.64	122.20	-20.56	peak	No Limit
2	*	5825.000	51.54	38.80	90.34	54.00	36.34	AVG	No Limit
3		5852.075	18.62	38.87	57.49	117.47	-59.98	peak	
4		5860.780	16.87	38.90	55.77	109.18	-53.41	peak	
5		5882.850	15.33	38.96	54.29	99.37	-45.08	peak	

Test Mode	UNII-3/ TX A Mode 5825MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

Orthogonal Axis: Z

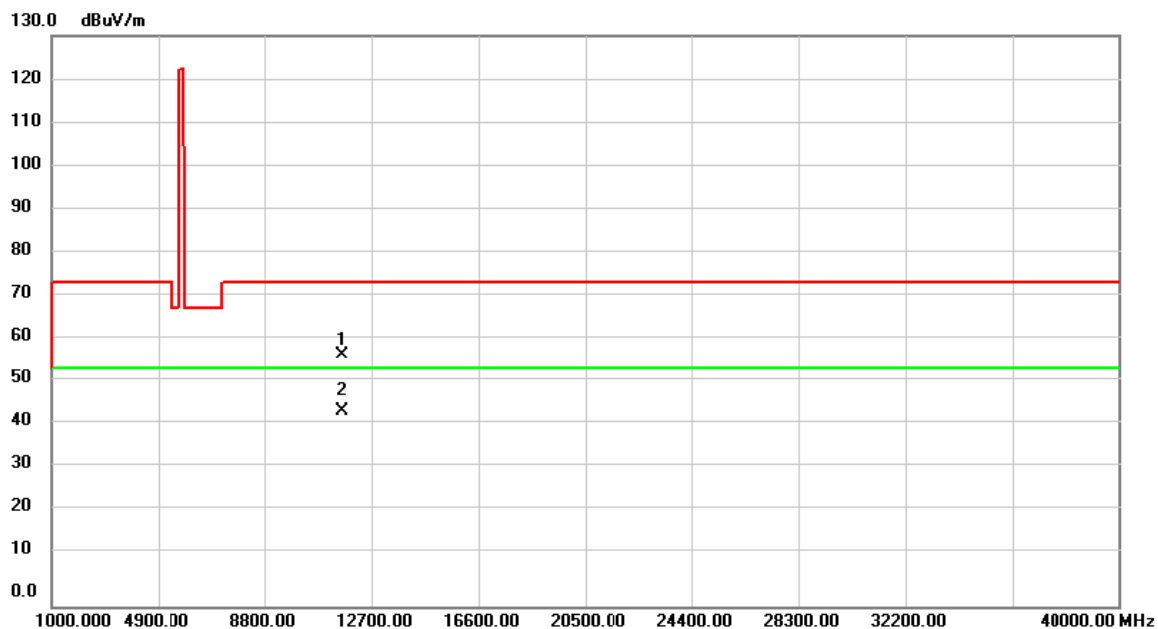


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	52.60	4.79	57.39	74.00	-16.61	peak	
2	*	11650.00	39.41	4.79	44.20	54.00	-9.80	AVG	

Test Mode UNII-3/ TX N20 Mode 5745MHz

Polarization

Vertical


Orthogonal Axis: Z

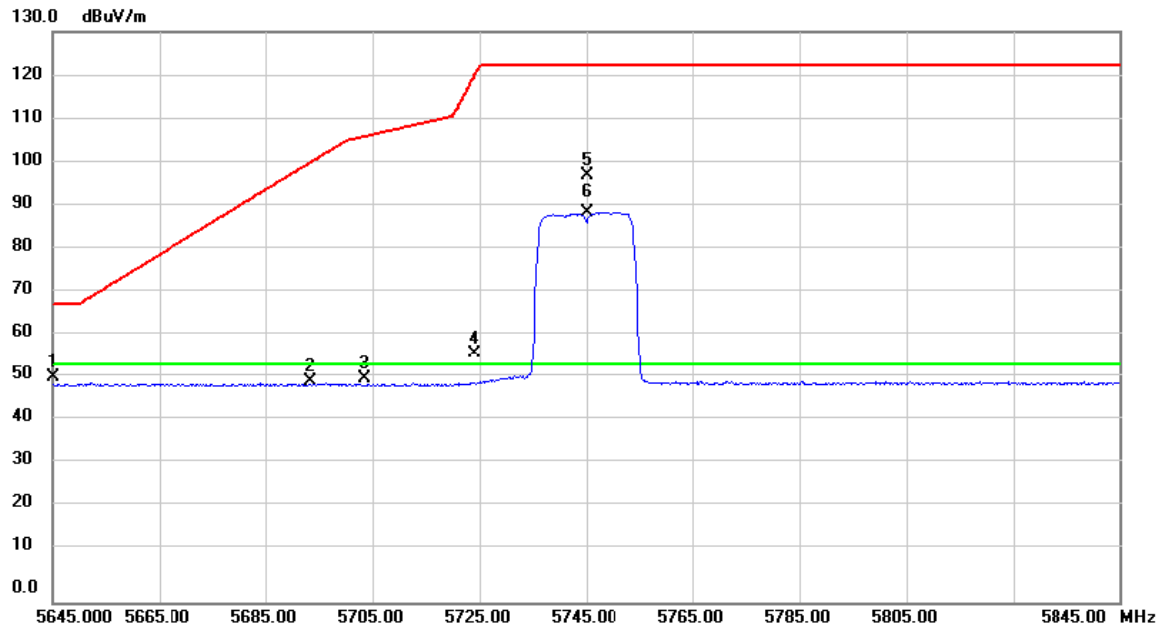

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5645.155	12.83	38.31	51.14	68.20	-17.06	peak	
2		5693.500	11.86	38.45	50.31	100.41	-50.10	peak	
3		5703.460	12.29	38.48	50.77	106.17	-55.40	peak	
4		5724.195	18.31	38.53	56.84	120.37	-63.53	peak	
5		5745.000	58.60	38.58	97.18	122.20	-25.02	peak	No Limit
6	*	5745.000	50.36	38.58	88.94	54.00	34.94	AVG	No Limit

Test Mode	UNII-3/ TX N20 Mode 5745MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------

Orthogonal Axis: Z

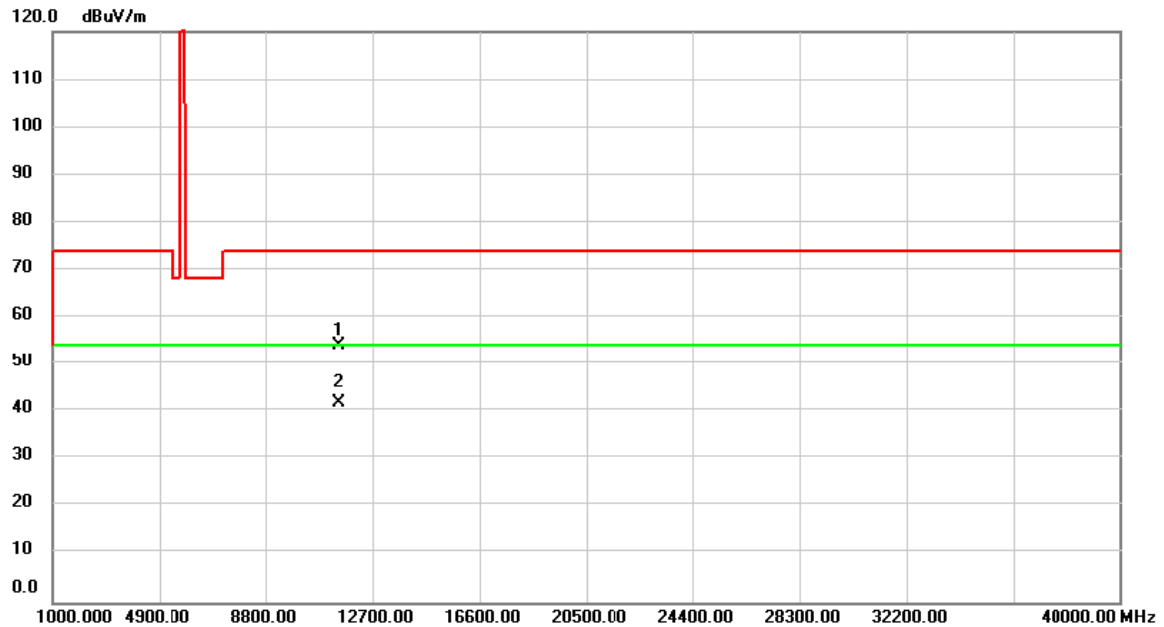


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	50.85	3.40	54.25	74.00	-19.75	peak	
2	*	11490.00	38.41	3.40	41.81	54.00	-12.19	AVG	

Test Mode UNII-3/ TX N20 Mode 5745MHz

Polarization

Horizontal


Orthogonal Axis: Z

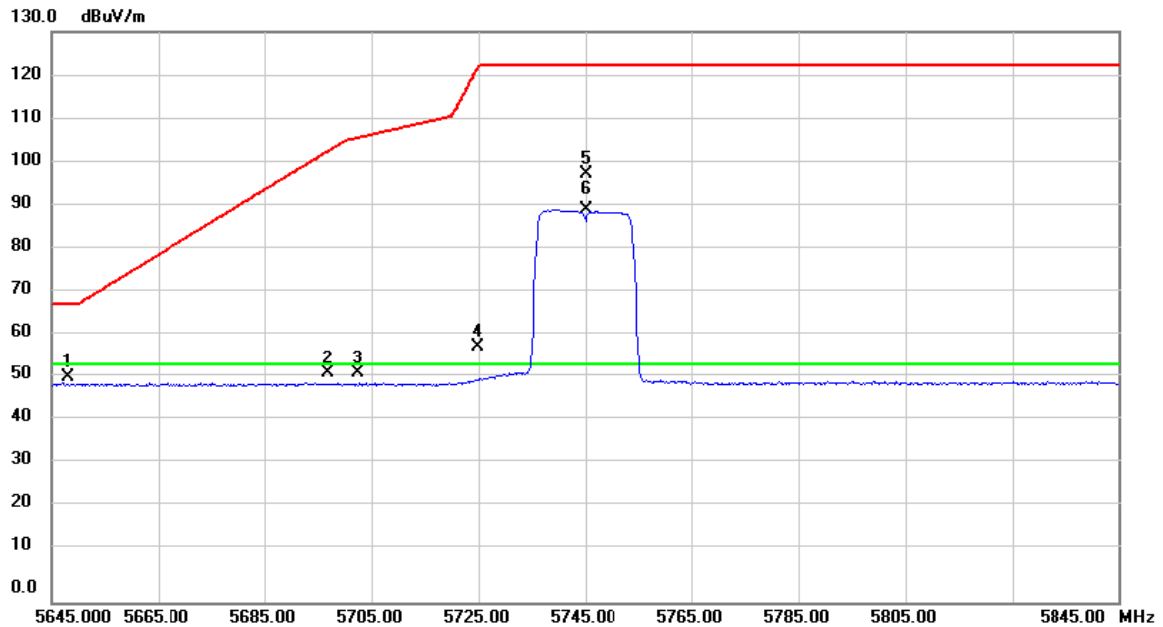

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5648.005	12.76	38.33	51.09	68.20	-17.11	peak	
2		5696.800	13.76	38.45	52.21	102.84	-50.63	peak	
3		5702.440	13.69	38.47	52.16	105.88	-53.72	peak	
4		5724.735	19.76	38.53	58.29	121.60	-63.31	peak	
5		5745.000	58.99	38.58	97.57	122.20	-24.63	peak	No Limit
6	*	5745.000	50.89	38.58	89.47	54.00	35.47	AVG	No Limit

Test Mode	UNII-3/ TX N20 Mode 5745MHz	Polarization	Horizontal
-----------	-----------------------------	--------------	------------

Orthogonal Axis: Z

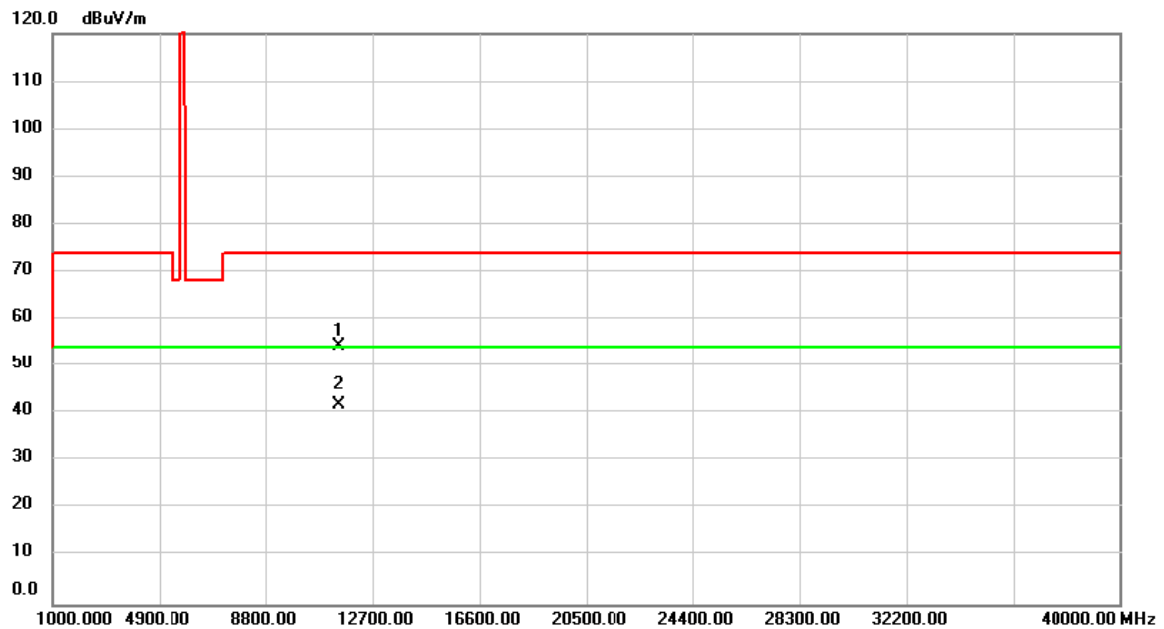


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	51.15	3.40	54.55	74.00	-19.45	peak	
2	*	11490.00	38.43	3.40	41.83	54.00	-12.17	AVG	

Test Mode UNII-3/ TX N20 Mode 5785MHz

Polarization

Vertical


Orthogonal Axis: Z

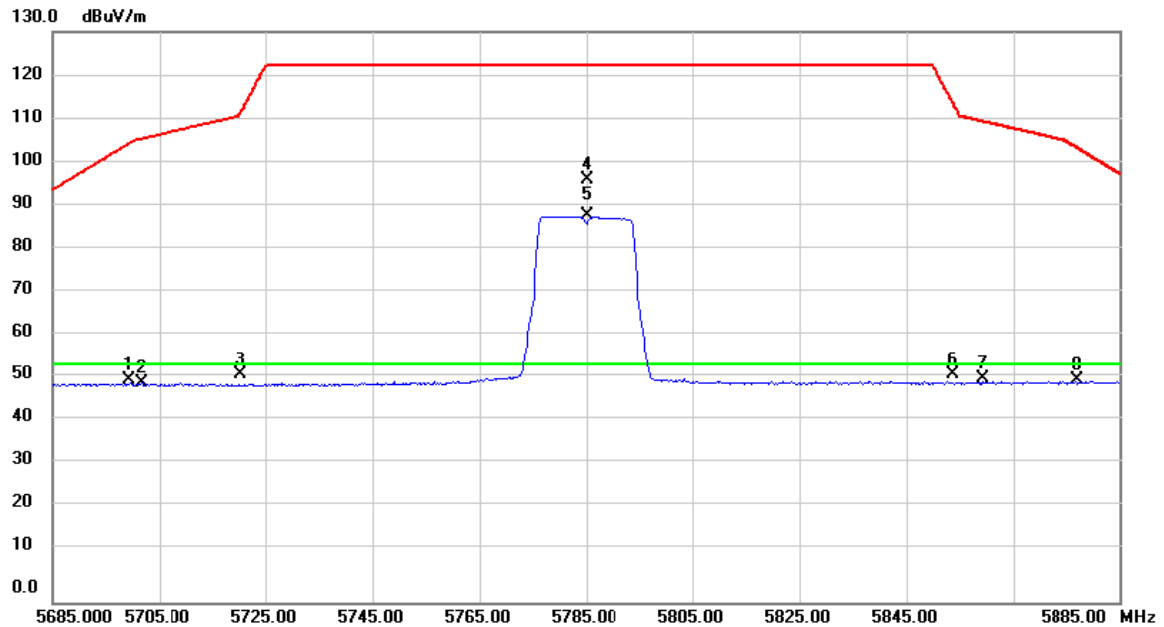

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5699.205	12.20	38.46	50.66	104.61	-53.95	peak	
2		5701.560	11.41	38.47	49.88	105.64	-55.76	peak	
3		5720.295	13.40	38.52	51.92	111.47	-59.55	peak	
4		5785.000	57.81	38.70	96.51	122.20	-25.69	peak	No Limit
5	*	5785.000	49.42	38.70	88.12	54.00	34.12	AVG	No Limit
6		5853.625	13.04	38.89	51.93	113.93	-62.00	peak	
7		5859.160	11.97	38.89	50.86	109.63	-58.77	peak	
8		5877.130	11.52	38.94	50.46	103.62	-53.16	peak	

Test Mode	UNII-3/ TX N20 Mode 5785MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------

Orthogonal Axis: Z

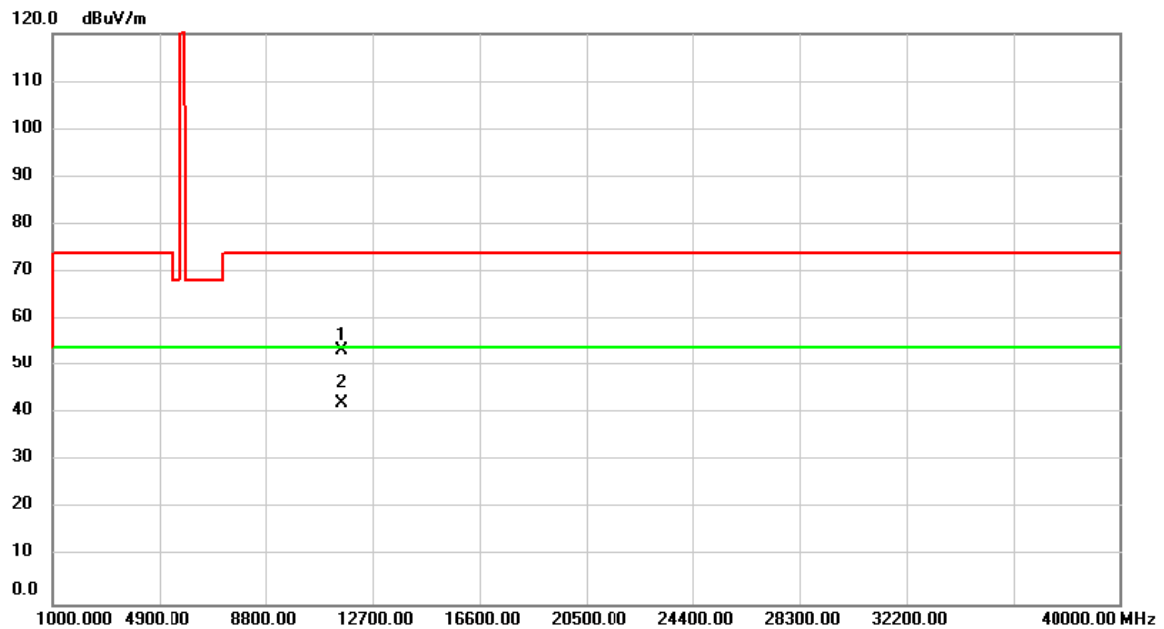


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	50.33	3.28	53.61	74.00	-20.39	peak	
2	*	11570.00	38.74	3.28	42.02	54.00	-11.98	AVG	

Test Mode UNII-3/ TX N20 Mode 5785MHz

Polarization

Horizontal

Orthogonal Axis: Z

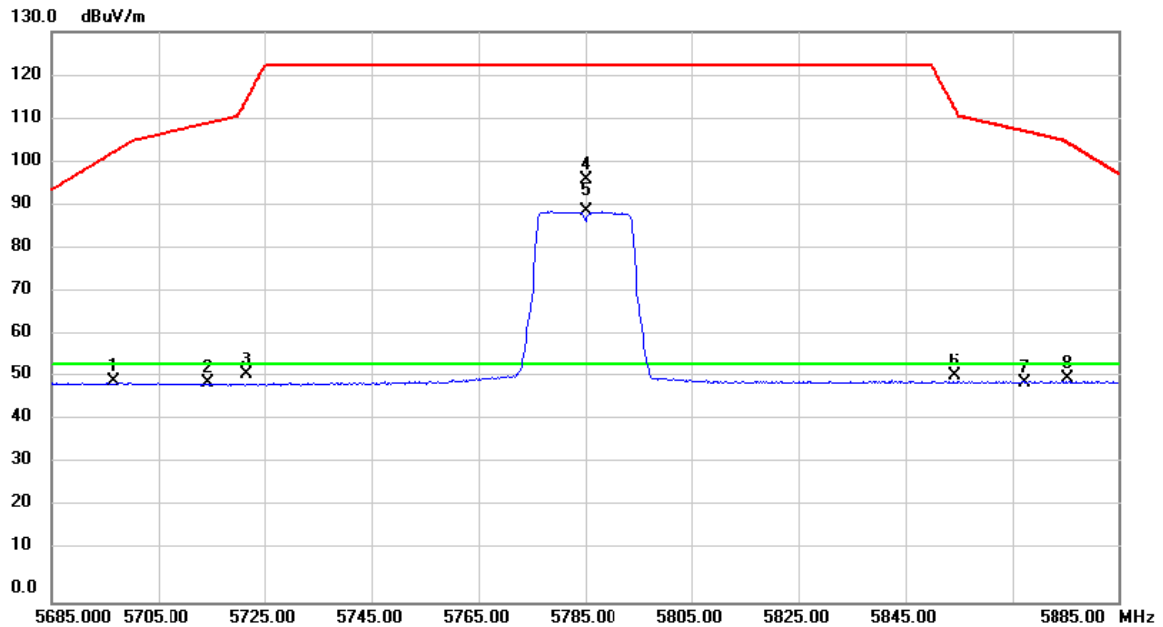


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5696.565	11.81	38.45	50.26	102.67	-52.41	peak	
2		5714.420	11.27	38.50	49.77	109.24	-59.47	peak	
3		5721.535	13.29	38.52	51.81	114.30	-62.49	peak	
4		5785.000	57.80	38.70	96.50	122.20	-25.70	peak	No Limit
5	*	5785.000	50.52	38.70	89.22	54.00	35.22	AVG	No Limit
6		5854.140	12.77	38.89	51.66	112.76	-61.10	peak	
7		5867.280	11.12	38.92	50.04	107.36	-57.32	peak	
8		5875.650	11.97	38.94	50.91	104.72	-53.81	peak	

Test Mode UNII-3/ TX N20 Mode 5785MHz

Polarization

Horizontal


Orthogonal Axis: Z

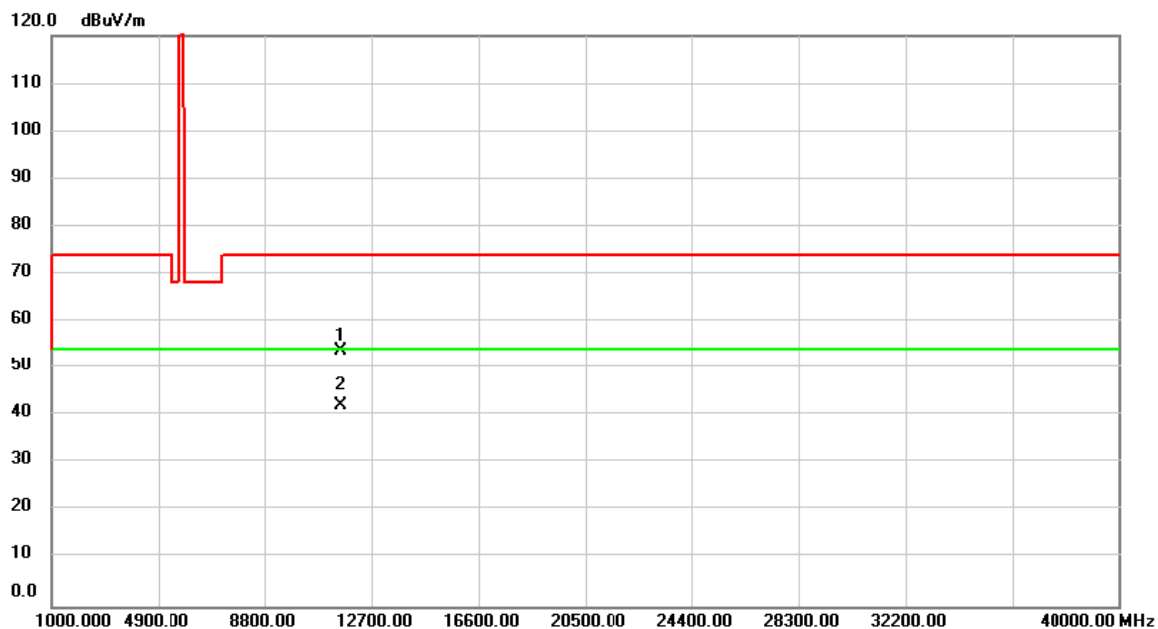

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	50.68	3.28	53.96	74.00	-20.04	peak	
2	*	11570.00	38.82	3.28	42.10	54.00	-11.90	AVG	

Test Mode	UNII-3/ TX N20 Mode 5825MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: Z

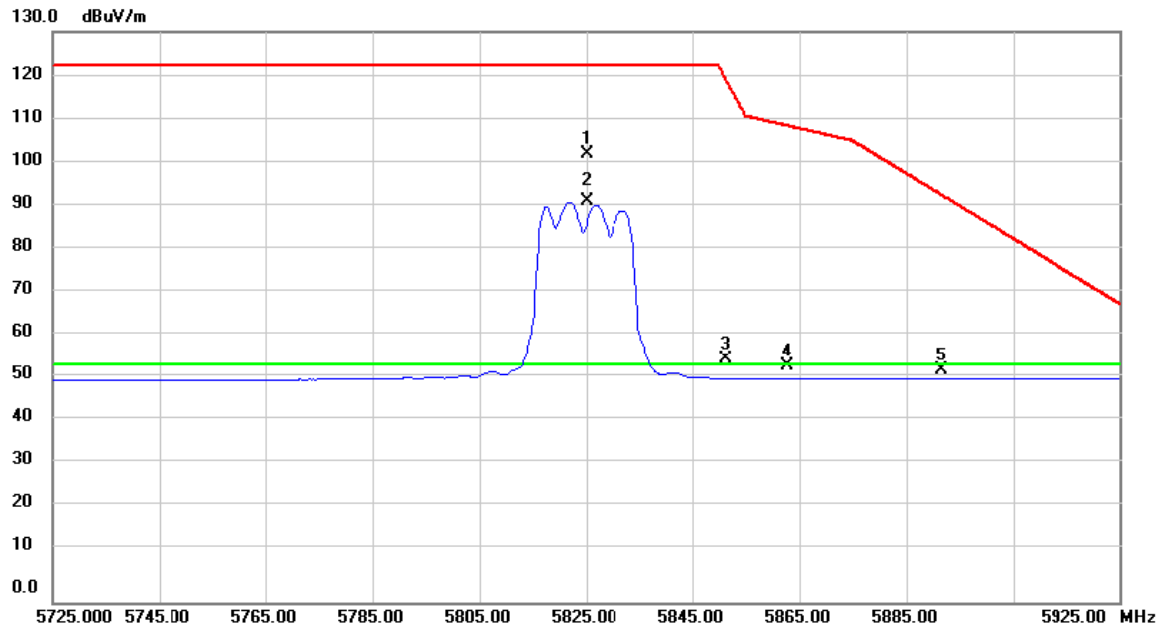

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5825.000	63.33	38.80	102.13	122.20	-20.07	peak	No Limit
2	*	5825.000	52.54	38.80	91.34	54.00	37.34	AVG	No Limit
3		5851.385	16.65	38.87	55.52	119.04	-63.52	peak	
4		5862.640	14.81	38.91	53.72	108.66	-54.94	peak	
5		5891.550	13.79	38.99	52.78	92.92	-40.14	peak	

Test Mode	UNII-3/ TX N20 Mode 5825MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------

Orthogonal Axis: Z

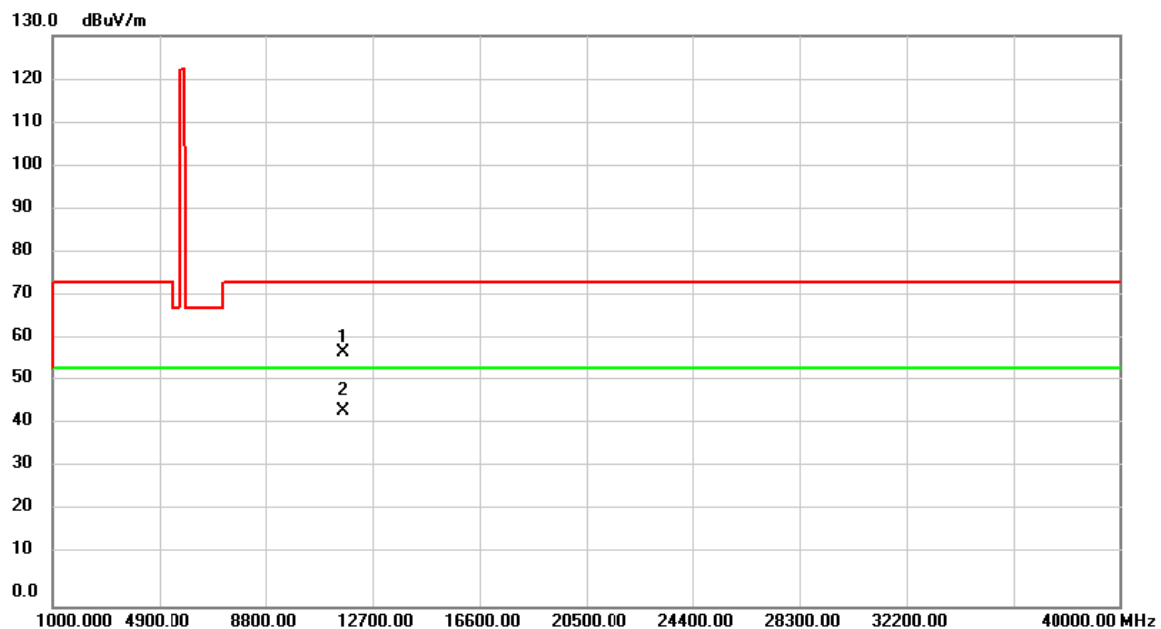


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	53.12	4.79	57.91	74.00	-16.09	peak	
2	*	11650.00	39.60	4.79	44.39	54.00	-9.61	AVG	

Test Mode UNII-3/ TX N20 Mode 5825MHz

Polarization

Horizontal


Orthogonal Axis: Z

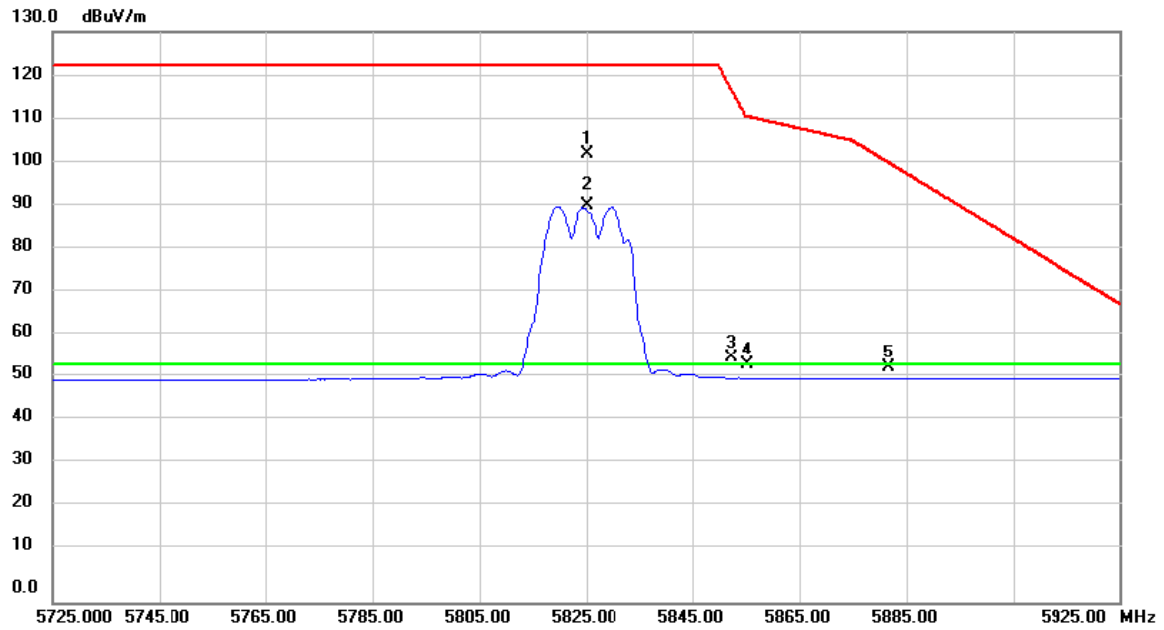

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5825.000	63.42	38.80	102.22	122.20	-19.98	peak	No Limit
2	*	5825.000	51.56	38.80	90.36	54.00	36.36	AVG	No Limit
3		5852.370	16.99	38.87	55.86	116.80	-60.94	peak	
4		5855.280	15.31	38.89	54.20	110.72	-56.52	peak	
5		5881.600	14.39	38.96	53.35	100.30	-46.95	peak	

Test Mode	UNII-3/ TX N20 Mode 5825MHz	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: Z

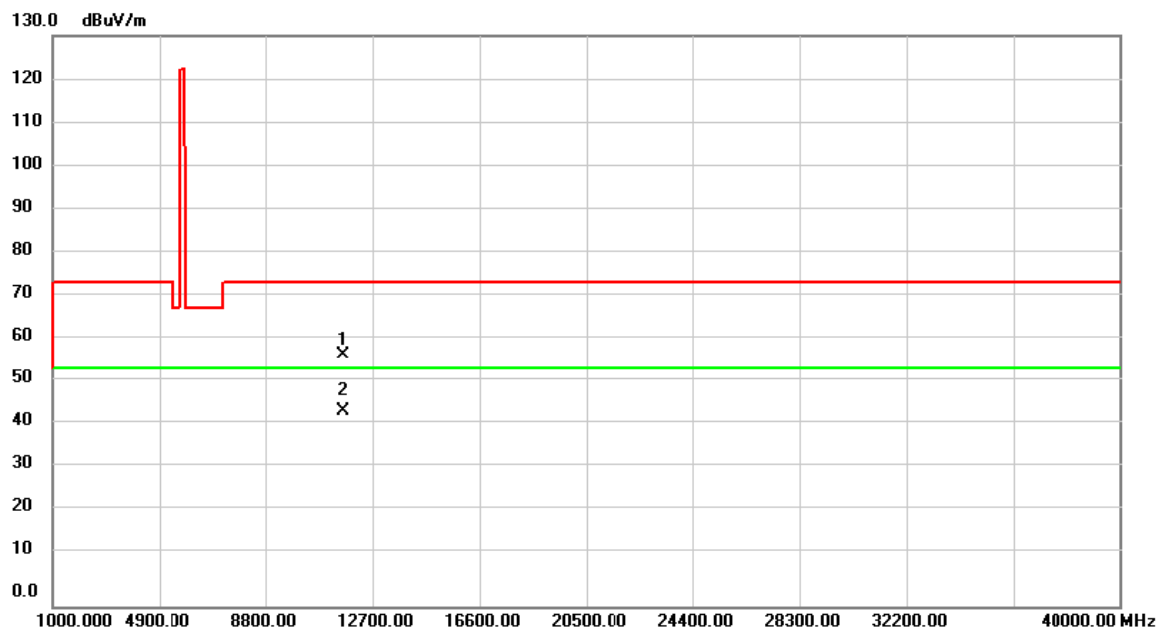

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	52.44	4.79	57.23	74.00	-16.77	peak	
2	*	11650.00	39.63	4.79	44.42	54.00	-9.58	AVG	

Test Mode	UNII-3/ TX AC80 Mode 5775MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: Z

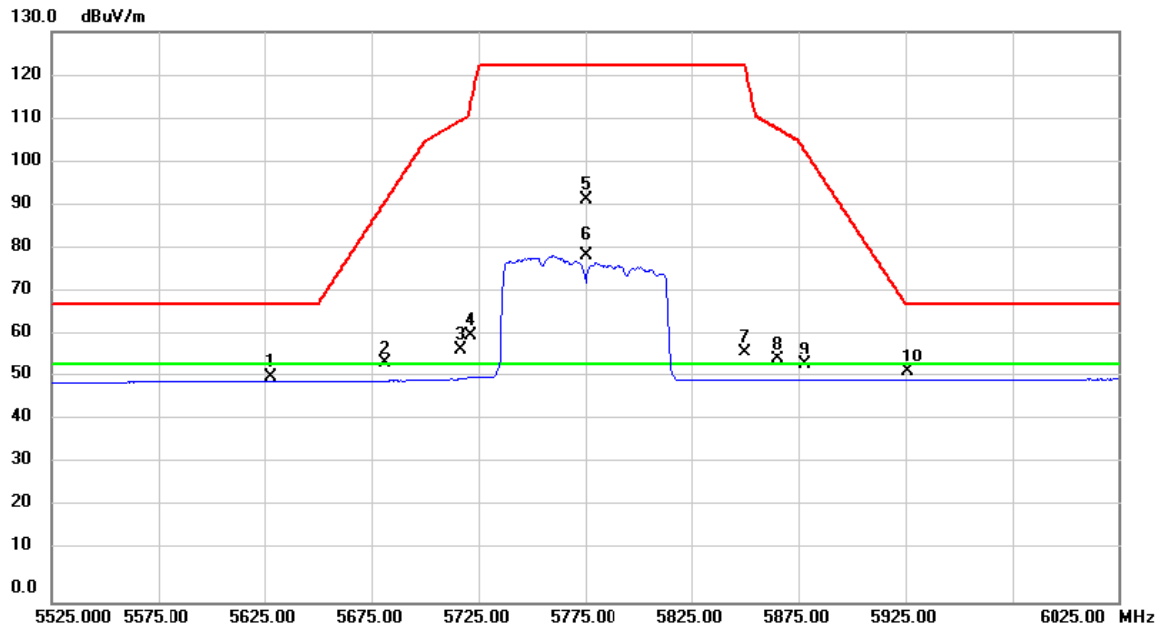

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5628.125	13.01	38.27	51.28	68.20	-16.92	peak	
2		5681.600	15.99	38.41	54.40	91.62	-37.22	peak	
3		5716.380	19.21	38.51	57.72	109.79	-52.07	peak	
4		5721.005	22.32	38.52	60.84	113.09	-52.25	peak	
5		5775.000	53.30	38.67	91.97	122.20	-30.23	peak	No Limit
6	*	5775.000	40.47	38.67	79.14	54.00	25.14	AVG	No Limit
7		5850.030	18.26	38.87	57.13	122.13	-65.00	peak	
8		5865.600	16.55	38.91	55.46	107.83	-52.37	peak	
9		5878.150	15.14	38.95	54.09	102.86	-48.77	peak	
10		5926.100	13.39	39.08	52.47	68.20	-15.73	peak	

Test Mode	UNII-3/ TX AC80 Mode 5775MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

Orthogonal Axis: Z

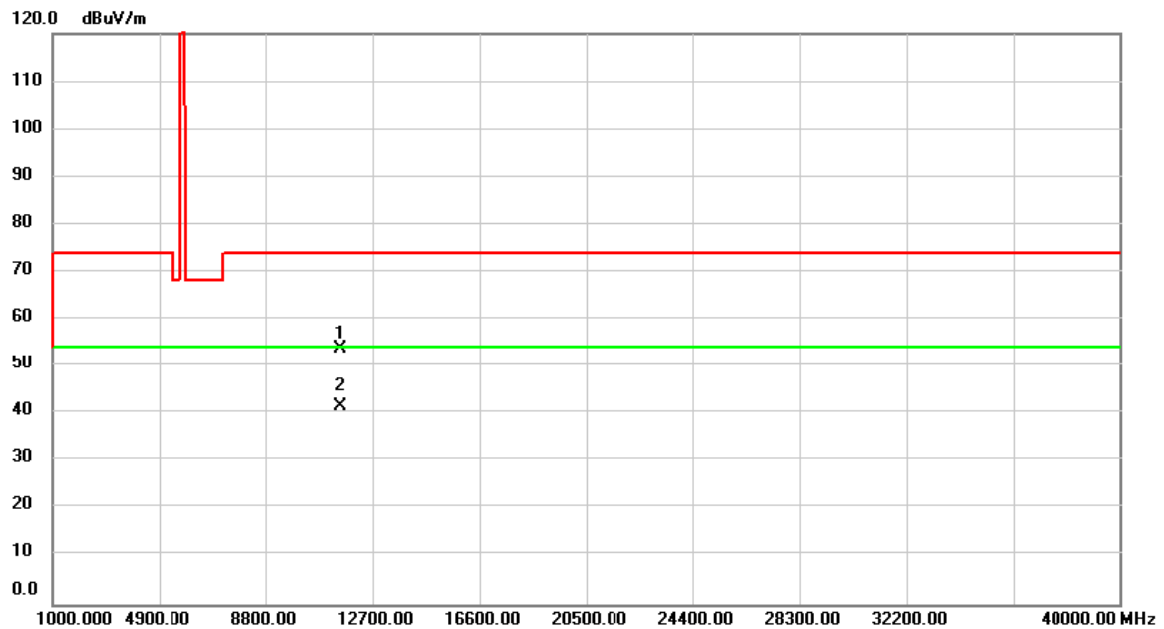


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	50.45	3.32	53.77	74.00	-20.23	peak	
2	*	11550.00	38.26	3.32	41.58	54.00	-12.42	AVG	

Test Mode UNII-3/ TX AC80 Mode 5775MHz

Polarization

Horizontal


Orthogonal Axis: Z

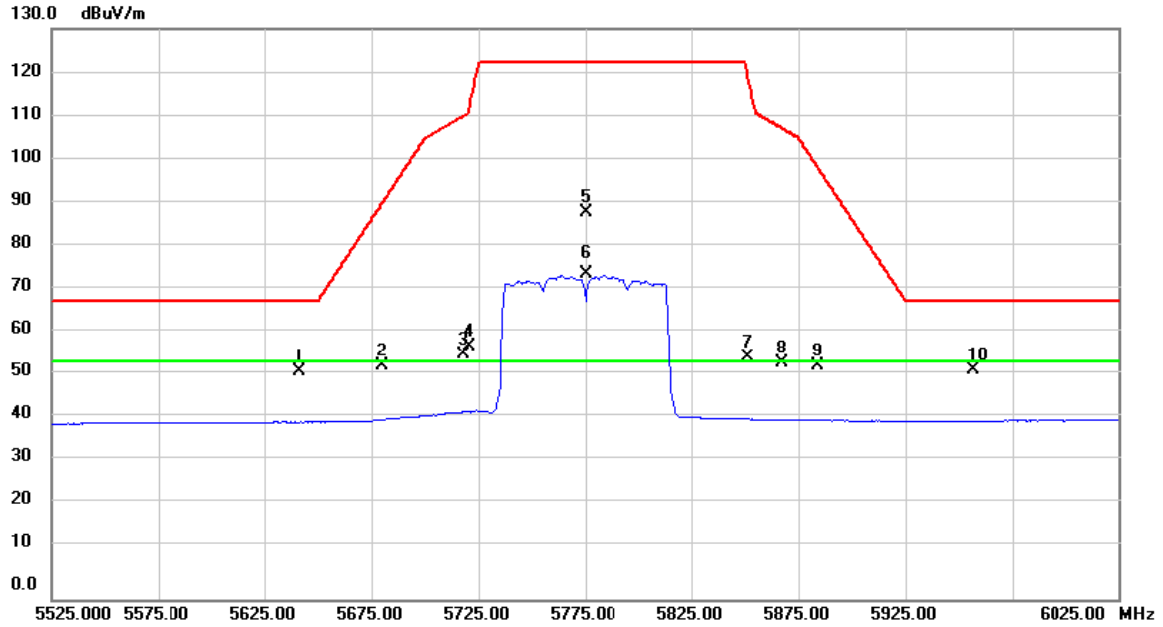

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5641.625	13.38	38.31	51.69	68.20	-16.51	peak	
2		5679.850	14.84	38.41	53.25	90.33	-37.08	peak	
3		5718.140	17.29	38.51	55.80	110.28	-54.48	peak	
4		5720.535	19.01	38.52	57.53	112.02	-54.49	peak	
5		5775.000	49.61	38.67	88.28	122.20	-33.92	peak	No Limit
6	*	5775.000	35.55	38.67	74.22	54.00	20.22	AVG	No Limit
7		5851.455	16.27	38.87	55.14	118.88	-63.74	peak	
8		5867.240	14.85	38.92	53.77	107.37	-53.60	peak	
9		5884.050	14.19	38.96	53.15	98.48	-45.33	peak	
10		5956.600	13.03	39.16	52.19	68.20	-16.01	peak	

Test Mode	UNII-3/ TX AC80 Mode 5775MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

Orthogonal Axis: Z

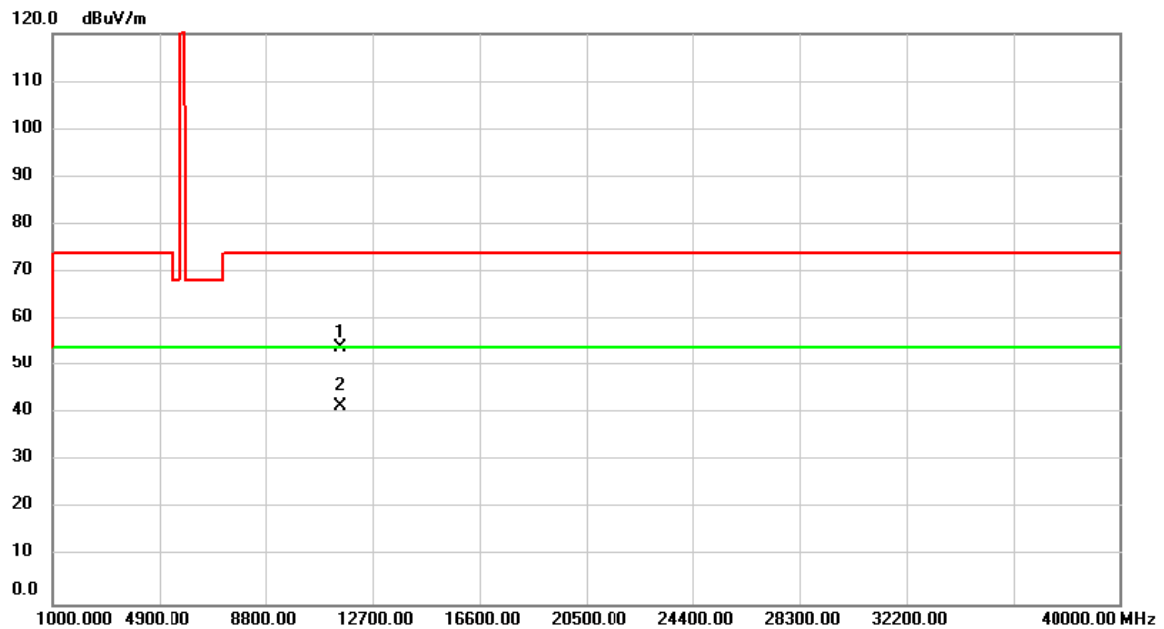


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	50.75	3.32	54.07	74.00	-19.93	peak	
2	*	11550.00	38.31	3.32	41.63	54.00	-12.37	AVG	

Spot check test:

Test Mode	UnII-1/ TX A Mode 5180MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

Orthogonal Axis: X

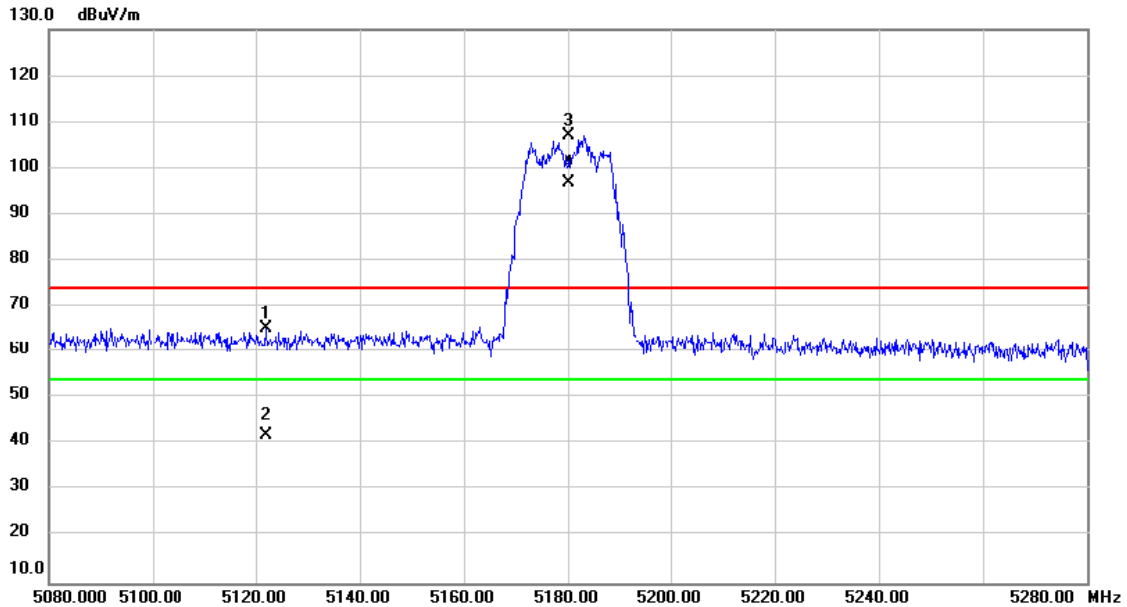


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5121.973	28.18	37.27	65.45	74.00	-8.55	peak	
2		5121.973	4.74	37.27	42.01	54.00	-11.99	AVG	
3	X	5180.000	69.58	37.33	106.91	74.00	32.91	peak	No Limit
4	*	5180.000	59.46	37.33	96.79	54.00	42.79	AVG	No Limit

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-1/ TX A Mode 5240MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

Orthogonal Axis: X

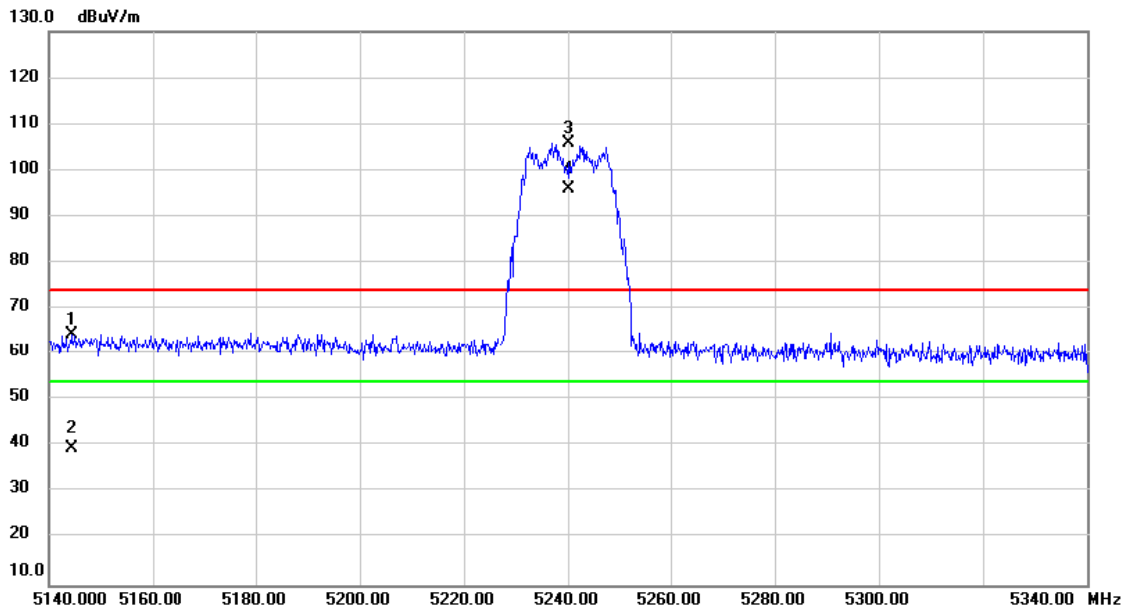


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5144.333	27.17	37.30	64.47	74.00	-9.53	peak	
2		5144.333	2.15	37.30	39.45	54.00	-14.55	AVG	
3	X	5240.000	68.53	37.38	105.91	74.00	31.91	peak	No Limit
4	*	5240.000	58.71	37.38	96.09	54.00	42.09	AVG	No Limit

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2A/ TX A Mode 5260MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: X

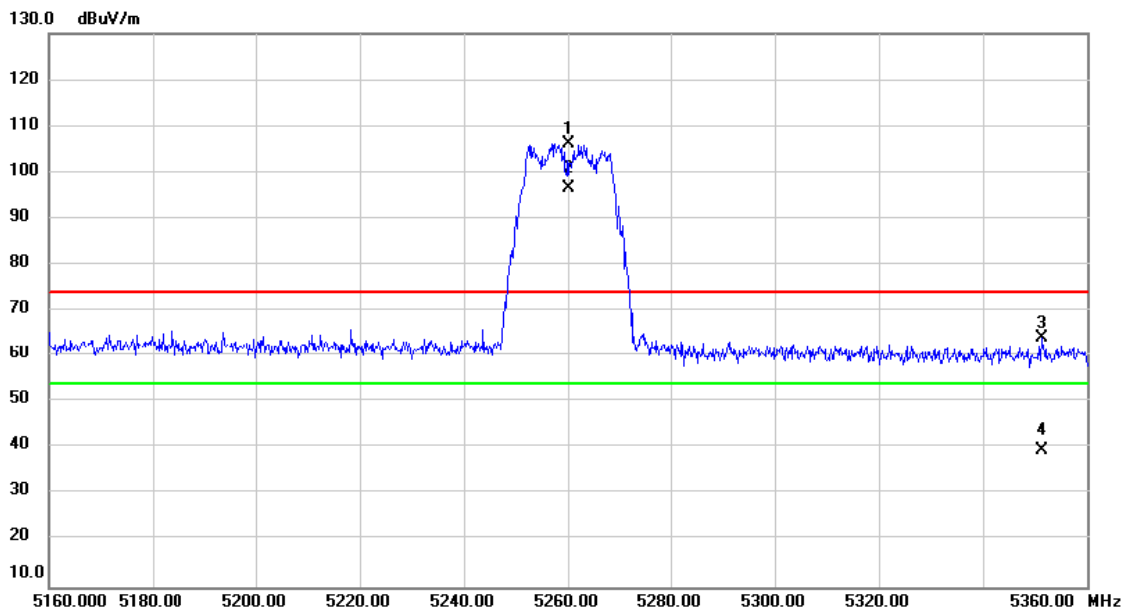


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5260.000	68.76	37.40	106.16	74.00	32.16	peak	No Limit
2	*	5260.000	59.21	37.40	96.61	54.00	42.61	AVG	No Limit
3		5351.247	26.70	37.48	64.18	74.00	-9.82	peak	
4		5351.247	2.12	37.48	39.60	54.00	-14.40	AVG	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2A/ TX A Mode 5320MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: X

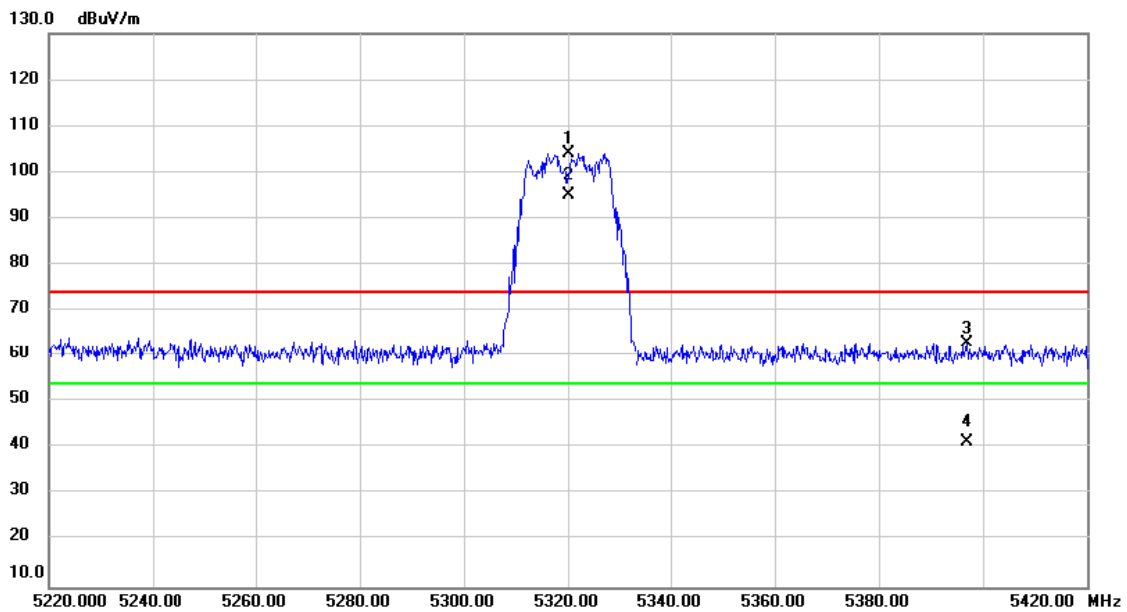


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	66.62	37.45	104.07	74.00	30.07	peak	No Limit
2	*	5320.000	57.51	37.45	94.96	54.00	40.96	AVG	No Limit
3		5396.920	25.55	37.52	63.07	74.00	-10.93	peak	
4		5396.920	3.88	37.52	41.40	54.00	-12.60	AVG	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2C/ TX A Mode 5500MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: X

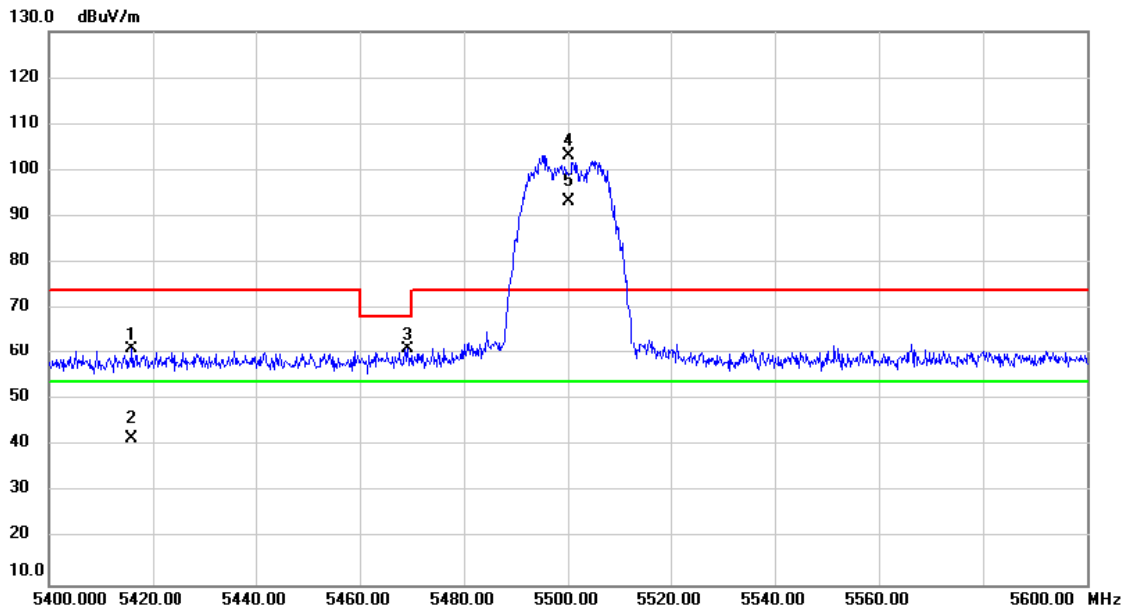


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5415.933	23.48	37.54	61.02	74.00	-12.98	peak	
2		5415.933	4.02	37.54	41.56	54.00	-12.44	AVG	
3		5469.240	23.50	37.58	61.08	68.20	-7.12	peak	
4	X	5500.000	65.46	37.61	103.07	74.00	29.07	peak	No Limit
5	*	5500.000	55.69	37.61	93.30	54.00	39.30	AVG	No Limit

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2C/ TX A Mode 5700MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: X

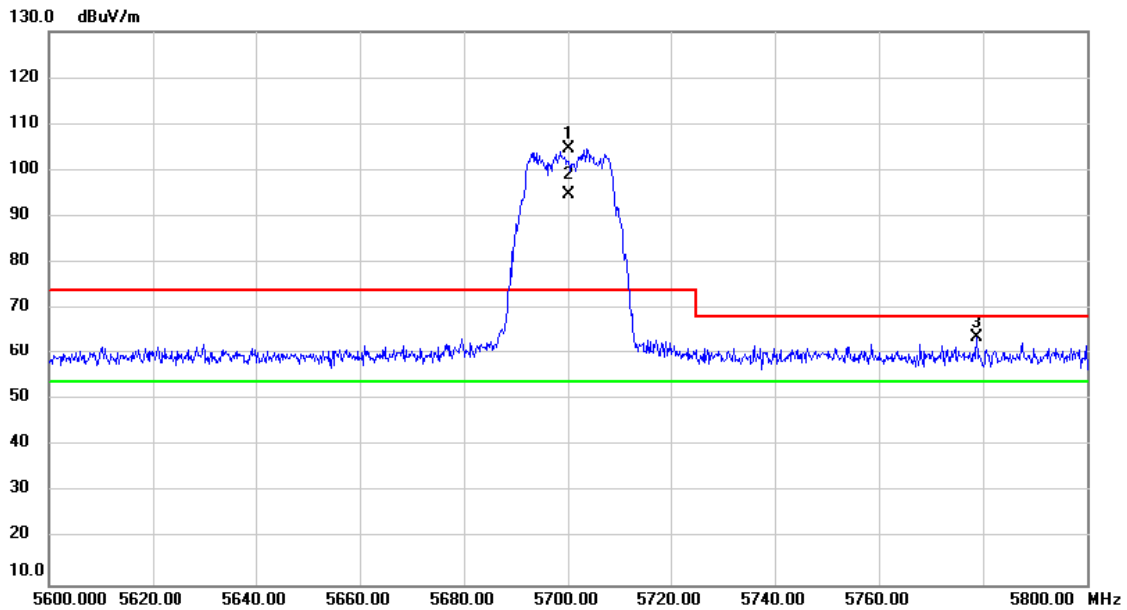


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	66.63	38.04	104.67	74.00	30.67	peak	No Limit
2	*	5700.000	56.83	38.04	94.87	54.00	40.87	AVG	No Limit
3		5778.693	25.52	38.20	63.72	68.20	-4.48	peak	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-3/ TX A Mode 5745MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

Orthogonal Axis: X

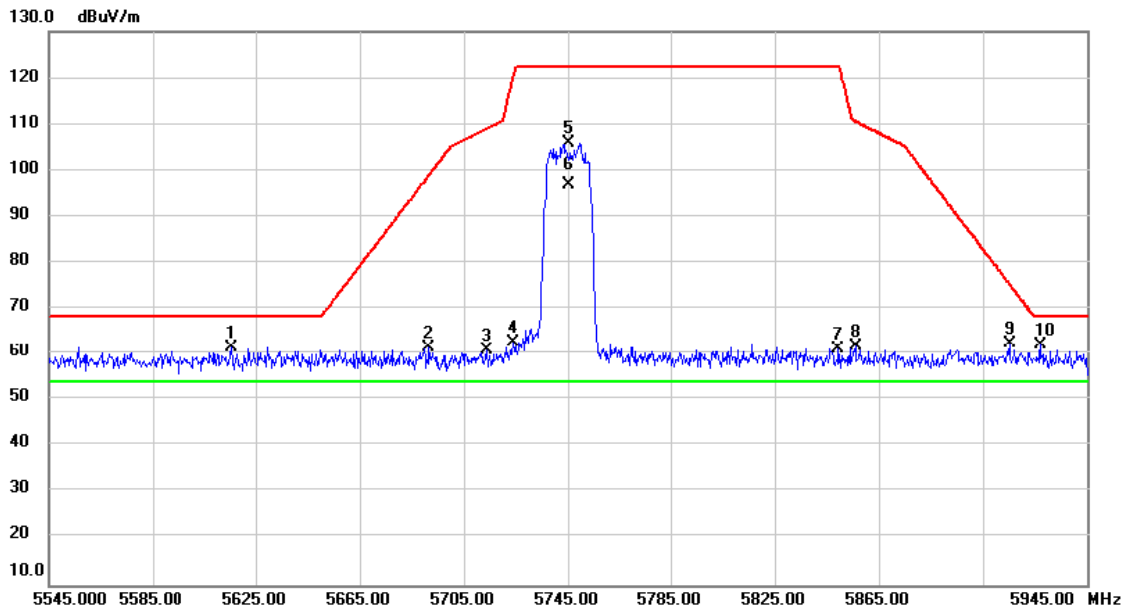


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5615.573	23.71	37.86	61.57	68.20	-6.63	peak	
2		5691.547	23.43	38.02	61.45	98.97	-37.52	peak	
3		5713.800	22.69	38.07	60.76	109.07	-48.31	peak	
4		5724.120	24.44	38.09	62.53	120.19	-57.66	peak	
5		5745.000	67.64	38.13	105.77	122.20	-16.43	peak	No Limit
6	*	5745.000	58.81	38.13	96.94	54.00	42.94	AVG	No Limit
7		5849.480	22.76	38.36	61.12	122.20	-61.08	peak	
8		5856.067	23.48	38.37	61.85	110.50	-48.65	peak	
9		5915.293	23.89	38.50	62.39	75.36	-12.97	peak	
10		5927.320	23.43	38.52	61.95	68.20	-6.25	peak	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-3/ TX A Mode 5785MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

Orthogonal Axis: X

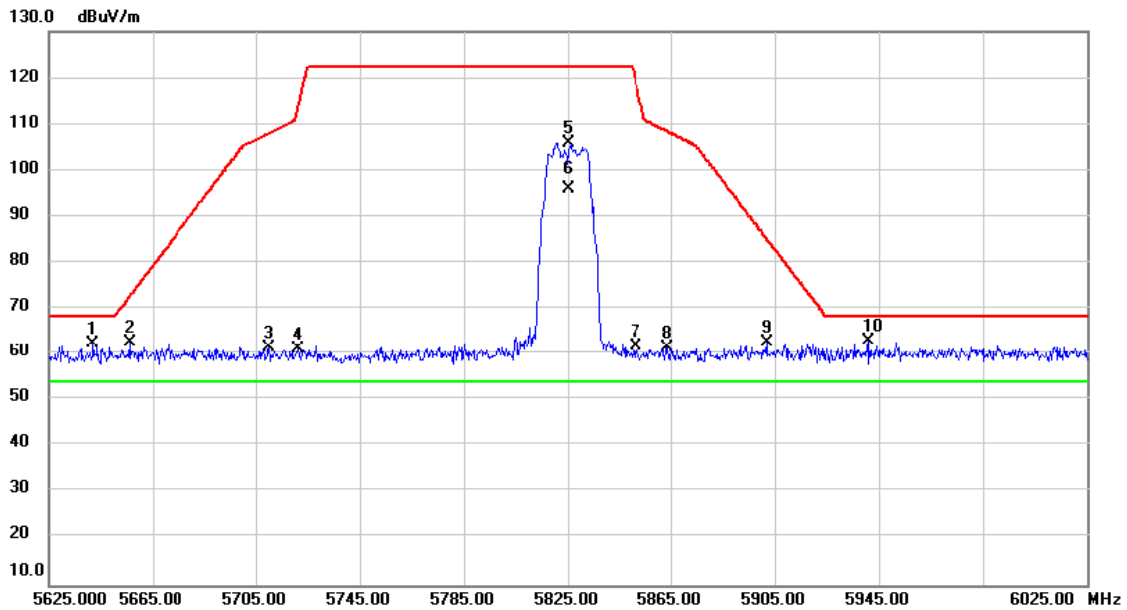


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5641.880	24.59	37.91	62.50	68.20	-5.70	peak	
2		5656.120	24.62	37.95	62.57	72.75	-10.18	peak	
3		5709.893	23.32	38.06	61.38	107.97	-46.59	peak	
4		5721.387	22.92	38.09	61.01	113.96	-52.95	peak	
5		5825.000	67.66	38.31	105.97	122.20	-16.23	peak	No Limit
6	*	5825.000	57.50	38.31	95.81	54.00	41.81	AVG	No Limit
7		5851.347	23.27	38.36	61.63	119.13	-57.50	peak	
8		5863.560	23.04	38.39	61.43	108.40	-46.97	peak	
9		5902.107	24.28	38.47	62.75	85.10	-22.35	peak	
10		5940.867	24.27	38.55	62.82	68.20	-5.38	peak	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-1/TX N20 Mode 5180MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: X

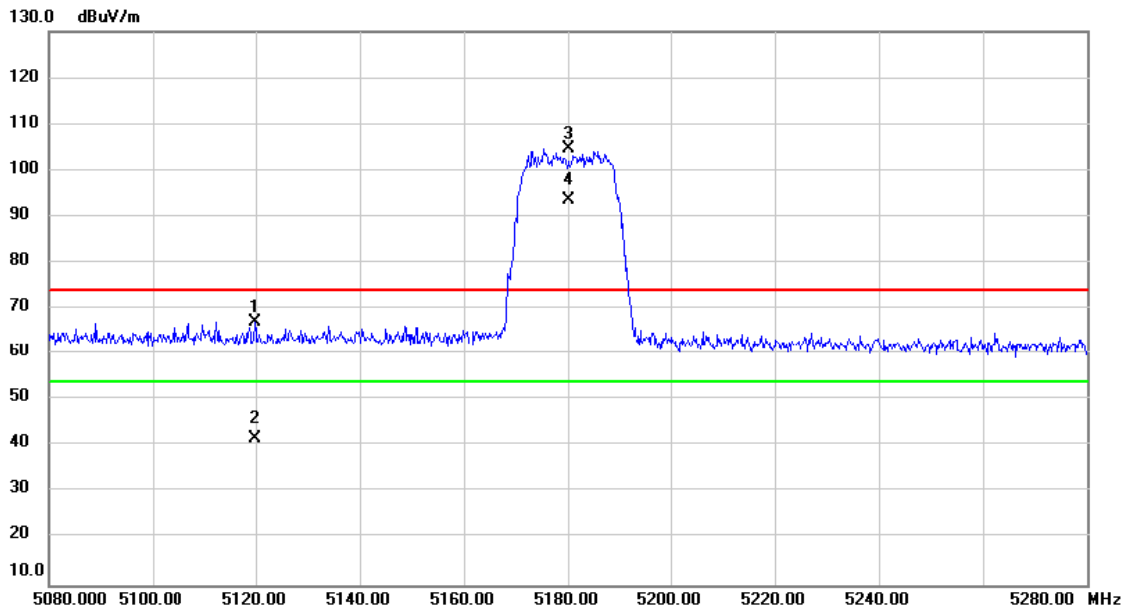


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5119.800	29.83	37.27	67.10	74.00	-6.90	peak	
2		5119.800	4.39	37.27	41.66	54.00	-12.34	AVG	
3	X	5180.000	67.32	37.33	104.65	74.00	30.65	peak	No Limit
4	*	5180.000	56.26	37.33	93.59	54.00	39.59	AVG	No Limit

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-1/TX N20 Mode 5240MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: X

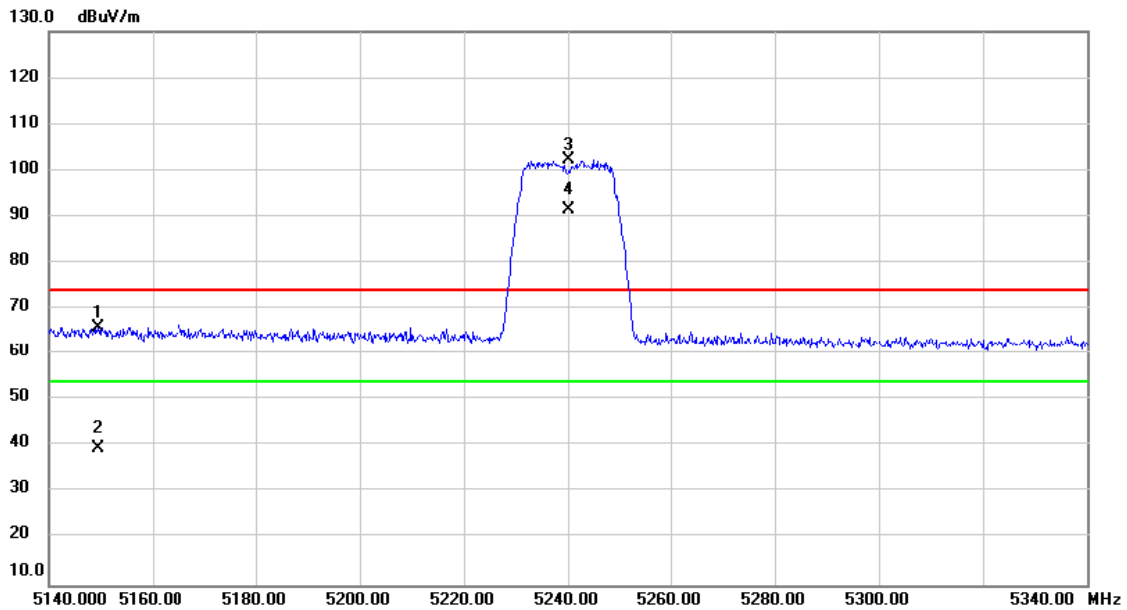


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5149.400	28.75	37.30	66.05	74.00	-7.95	peak	
2		5149.400	2.36	37.30	39.66	54.00	-14.34	AVG	
3	X	5240.000	64.93	37.38	102.31	74.00	28.31	peak	No Limit
4	*	5240.000	54.02	37.38	91.40	54.00	37.40	AVG	No Limit

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2A/TX N20 Mode 5260MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------

Orthogonal Axis: X

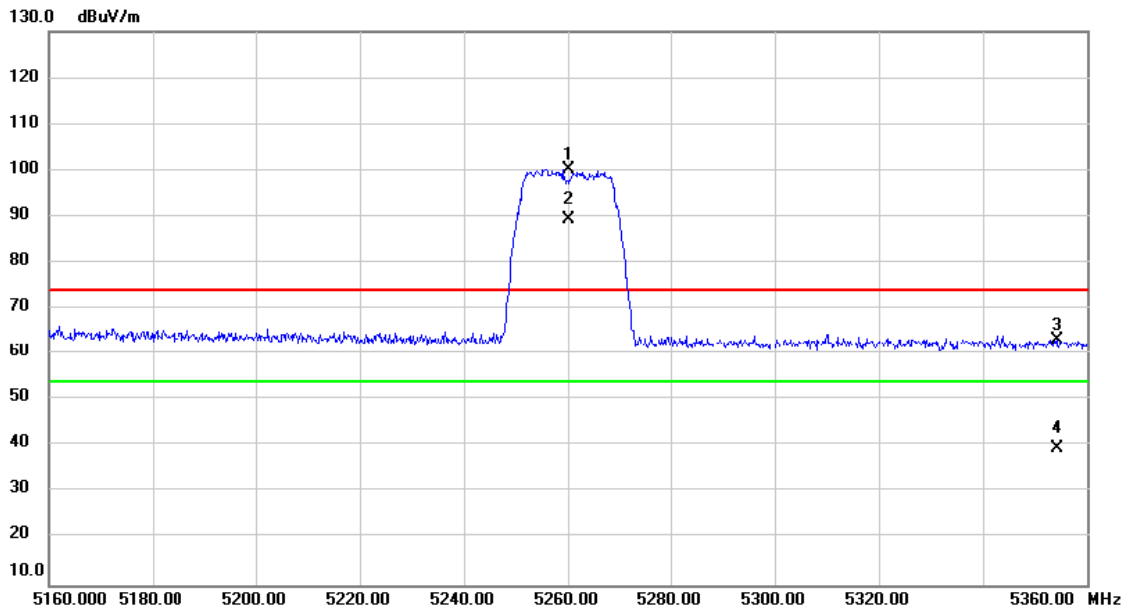


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5260.000	62.78	37.40	100.18	74.00	26.18	peak	No Limit
2	*	5260.000	52.05	37.40	89.45	54.00	35.45	AVG	No Limit
3		5354.200	25.86	37.48	63.34	74.00	-10.66	peak	
4		5354.200	1.98	37.48	39.46	54.00	-14.54	AVG	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2A/TX N20 Mode 5320MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------

Orthogonal Axis: X

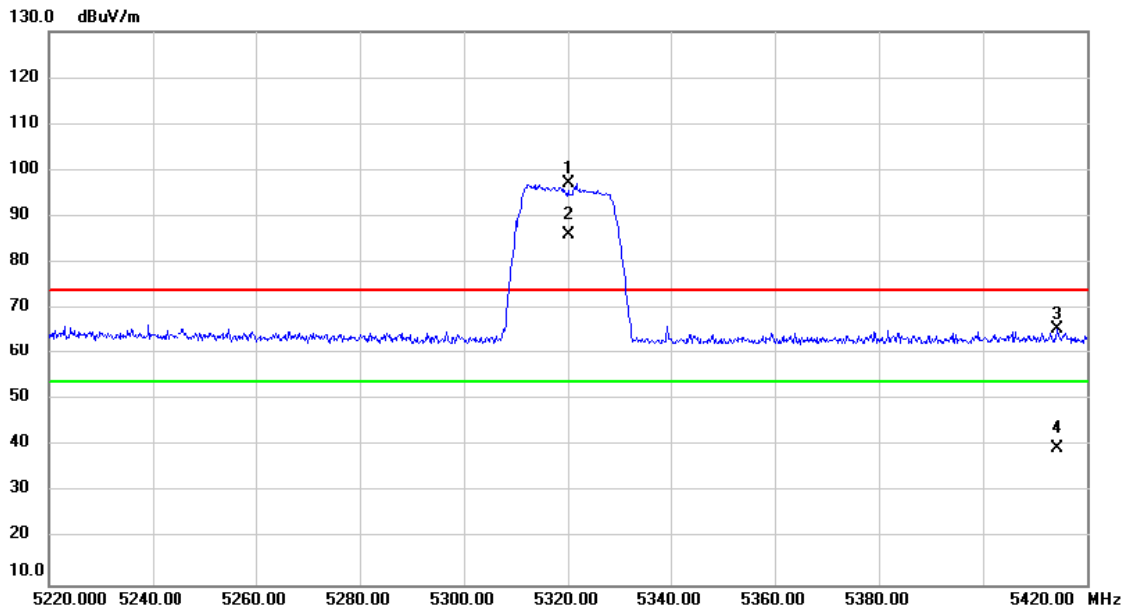


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	59.62	37.45	97.07	74.00	23.07	peak	No Limit
2	*	5320.000	48.62	37.45	86.07	54.00	32.07	AVG	No Limit
3		5414.200	28.05	37.54	65.59	74.00	-8.41	peak	
4		5414.200	1.97	37.54	39.51	54.00	-14.49	AVG	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2C/TX N20 Mode 5500MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------

Orthogonal Axis: X

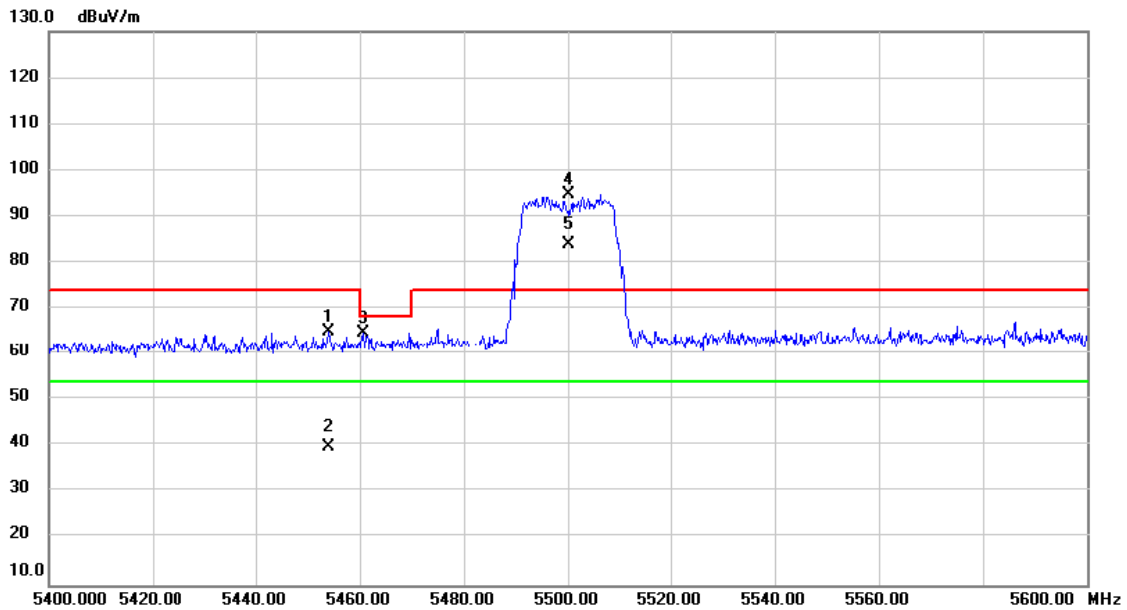


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5454.000	27.52	37.57	65.09	74.00	-8.91	peak	
2		5454.000	2.26	37.57	39.83	54.00	-14.17	AVG	
3		5460.600	27.10	37.58	64.68	68.20	-3.52	peak	
4	X	5500.000	57.14	37.61	94.75	74.00	20.75	peak	No Limit
5	*	5500.000	46.37	37.61	83.98	54.00	29.98	AVG	No Limit

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2C/TX N20 Mode 5700MHz	Polarization	Vertical
-----------	-----------------------------	--------------	----------

Orthogonal Axis: X

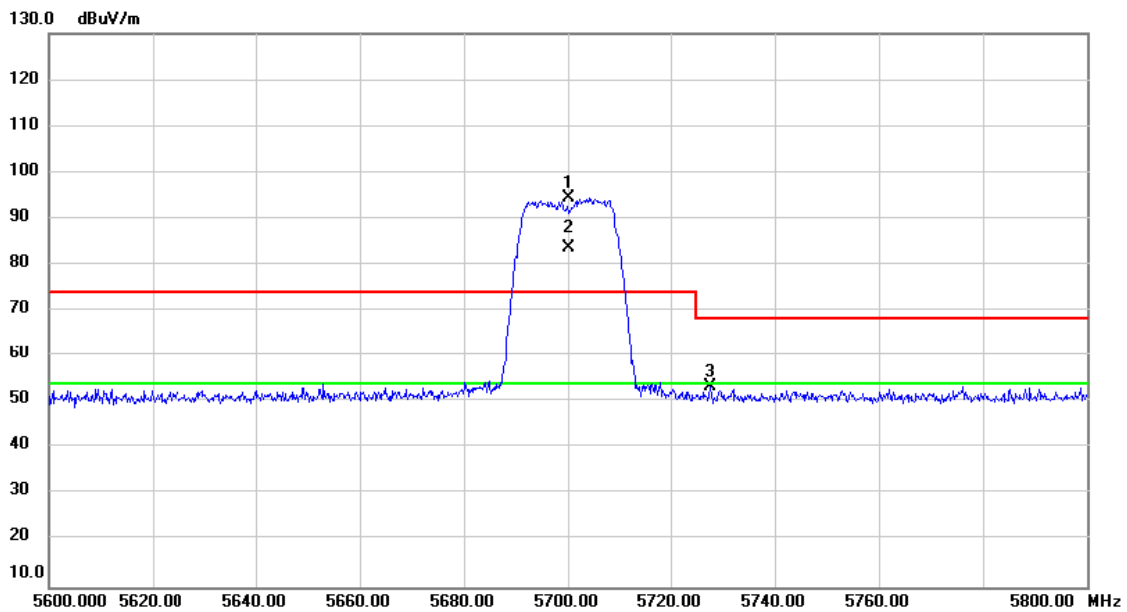


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	56.33	38.04	94.37	74.00	20.37	peak	No Limit
2	*	5700.000	45.64	38.04	83.68	54.00	29.68	AVG	No Limit
3		5727.600	15.14	38.09	53.23	68.20	-14.97	peak	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-3/TX N20 Mode 5745MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: X

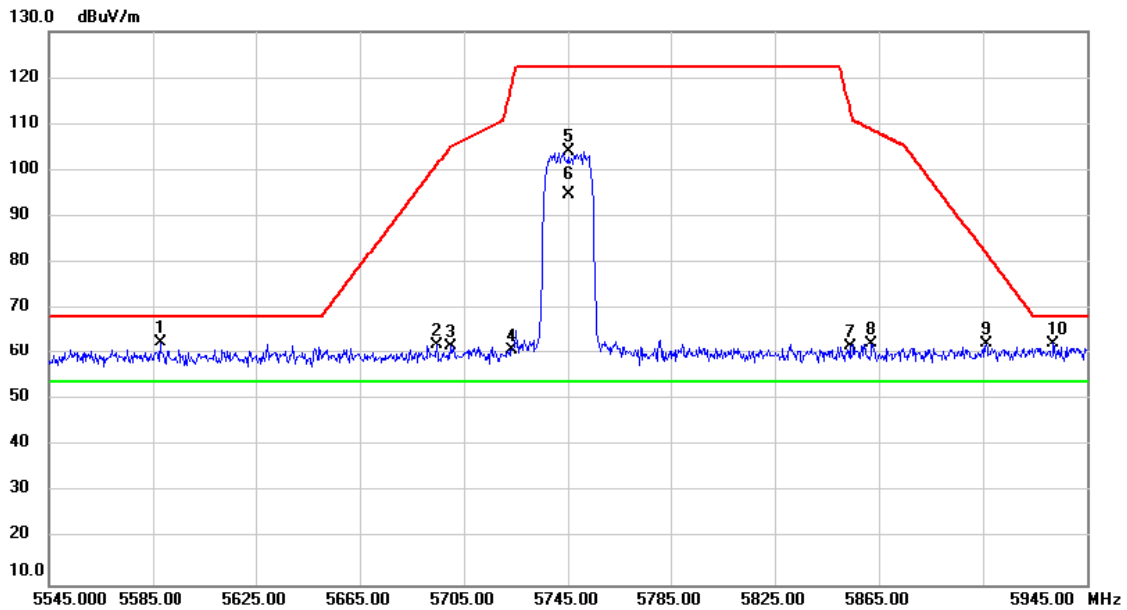


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5587.800	24.75	37.80	62.55	68.20	-5.65	peak	
2		5694.600	24.01	38.02	62.03	101.22	-39.19	peak	
3		5699.800	23.68	38.04	61.72	105.05	-43.33	peak	
4		5723.400	22.87	38.09	60.96	118.55	-57.59	peak	
5		5745.000	65.84	38.13	103.97	122.20	-18.23	peak	No Limit
6	*	5745.000	56.53	38.13	94.66	54.00	40.66	AVG	No Limit
7		5853.800	23.37	38.36	61.73	113.54	-51.81	peak	
8		5862.200	24.09	38.38	62.47	108.78	-46.31	peak	
9		5906.200	23.81	38.48	62.29	82.08	-19.79	peak	
10		5932.200	23.96	38.54	62.50	68.20	-5.70	peak	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-3/TX N20 Mode 5825MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: X

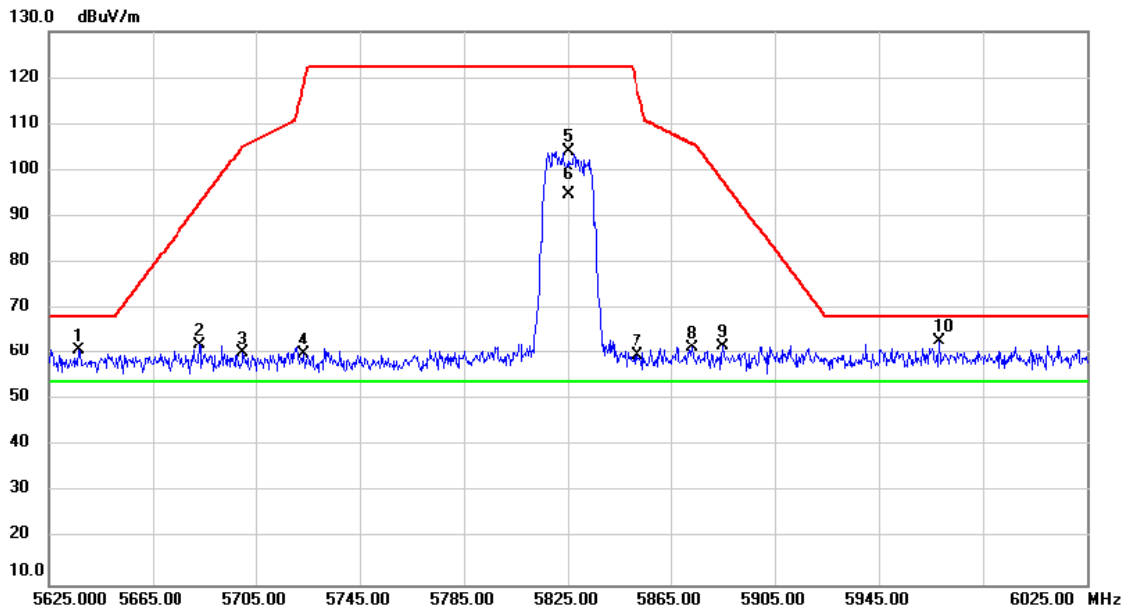


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5636.600	22.83	37.90	60.73	68.20	-7.47	peak	
2		5683.400	24.06	38.00	62.06	92.95	-30.89	peak	
3		5700.200	22.34	38.04	60.38	105.26	-44.88	peak	
4		5723.400	21.87	38.09	59.96	118.55	-58.59	peak	
5		5825.000	65.76	38.31	104.07	122.20	-18.13	peak	No Limit
6	*	5825.000	56.45	38.31	94.76	54.00	40.76	AVG	No Limit
7		5852.200	21.28	38.36	59.64	117.18	-57.54	peak	
8		5873.000	23.02	38.41	61.43	105.76	-44.33	peak	
9		5885.000	23.41	38.43	61.84	97.77	-35.93	peak	
10		5968.200	24.23	38.61	62.84	68.20	-5.36	peak	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-1/TX Ac (VHT80) Mode 5210MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

Orthogonal Axis: X

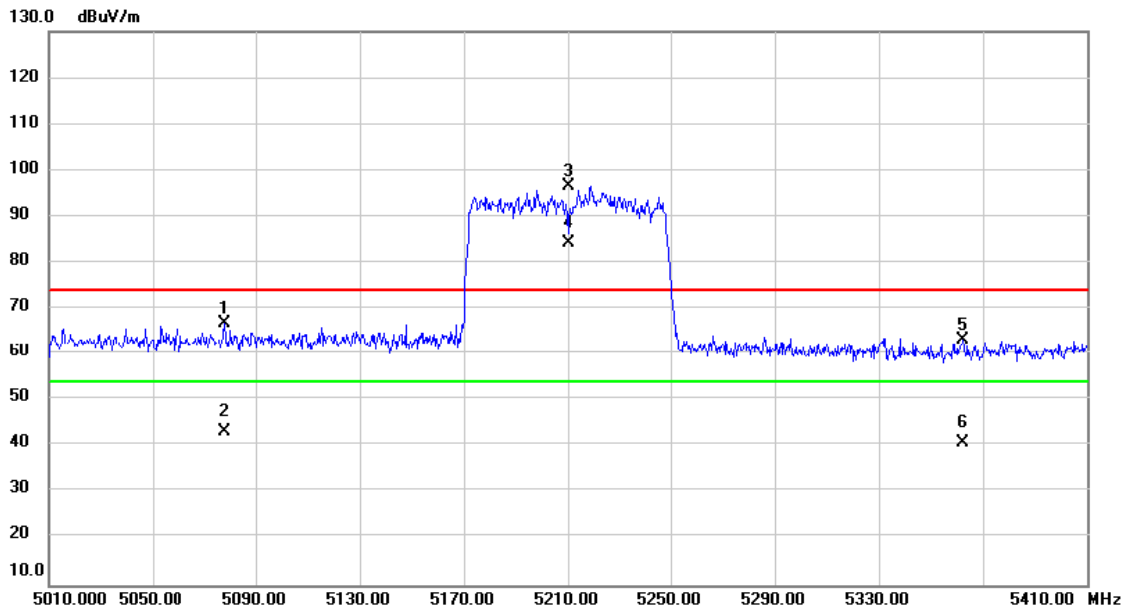


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5078.000	29.62	37.24	66.86	74.00	-7.14	peak	
2		5078.000	5.87	37.24	43.11	54.00	-10.89	AVG	
3	X	5210.000	59.10	37.36	96.46	74.00	22.46	peak	No Limit
4	*	5210.000	46.93	37.36	84.29	54.00	30.29	AVG	No Limit
5		5362.400	25.75	37.49	63.24	74.00	-10.76	peak	
6		5362.400	3.25	37.49	40.74	54.00	-13.26	AVG	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2A/TX Ac (VHT80) Mode 5290MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

Orthogonal Axis: X

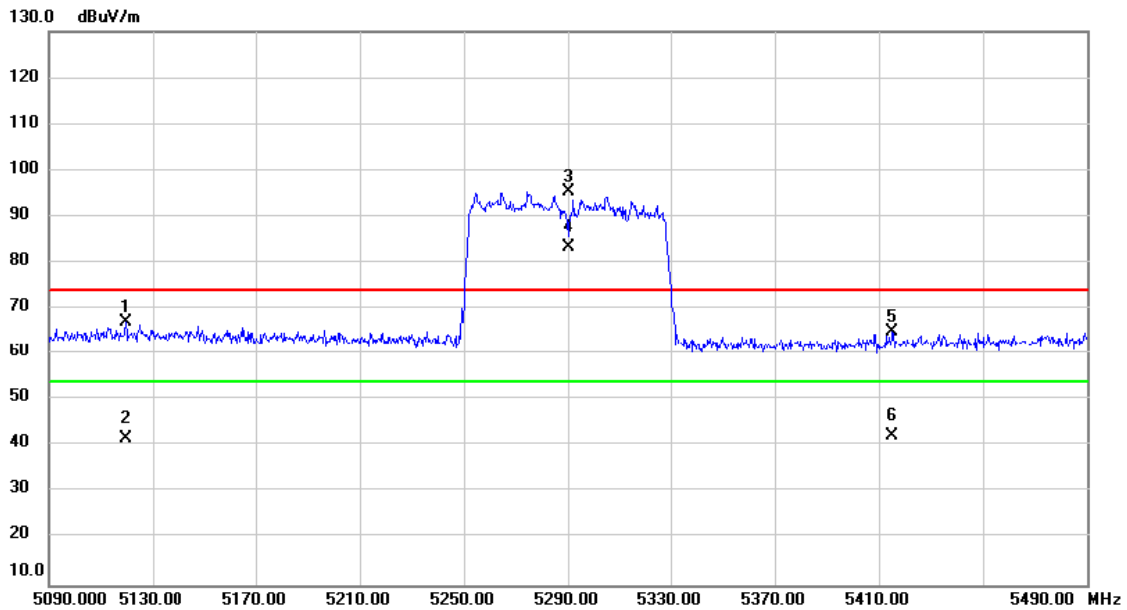


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5119.600	29.74	37.27	67.01	74.00	-6.99	peak	
2		5119.600	4.44	37.27	41.71	54.00	-12.29	AVG	
3	X	5290.000	57.91	37.42	95.33	74.00	21.33	peak	No Limit
4	*	5290.000	45.87	37.42	83.29	54.00	29.29	AVG	No Limit
5		5415.200	27.59	37.54	65.13	74.00	-8.87	peak	
6		5415.200	4.77	37.54	42.31	54.00	-11.69	AVG	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2C/TX Ac (VHT80) Mode 5530MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

Orthogonal Axis: X

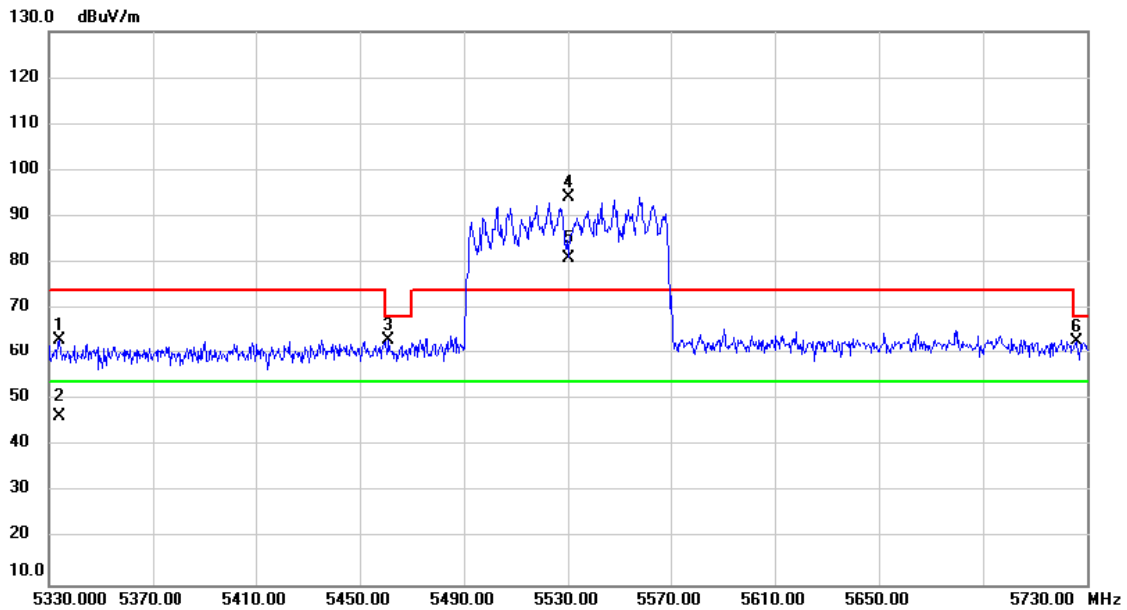


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5334.000	25.80	37.46	63.26	74.00	-10.74	peak	
2		5334.000	9.09	37.46	46.55	54.00	-7.45	AVG	
3		5461.200	25.70	37.58	63.28	68.20	-4.92	peak	
4	X	5530.000	56.51	37.68	94.19	74.00	20.19	peak	No Limit
5	*	5530.000	43.40	37.68	81.08	54.00	27.08	AVG	No Limit
6		5726.000	24.76	38.09	62.85	68.20	-5.35	peak	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-2C/TX Ac (VHT80) Mode 5610MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

Orthogonal Axis: X

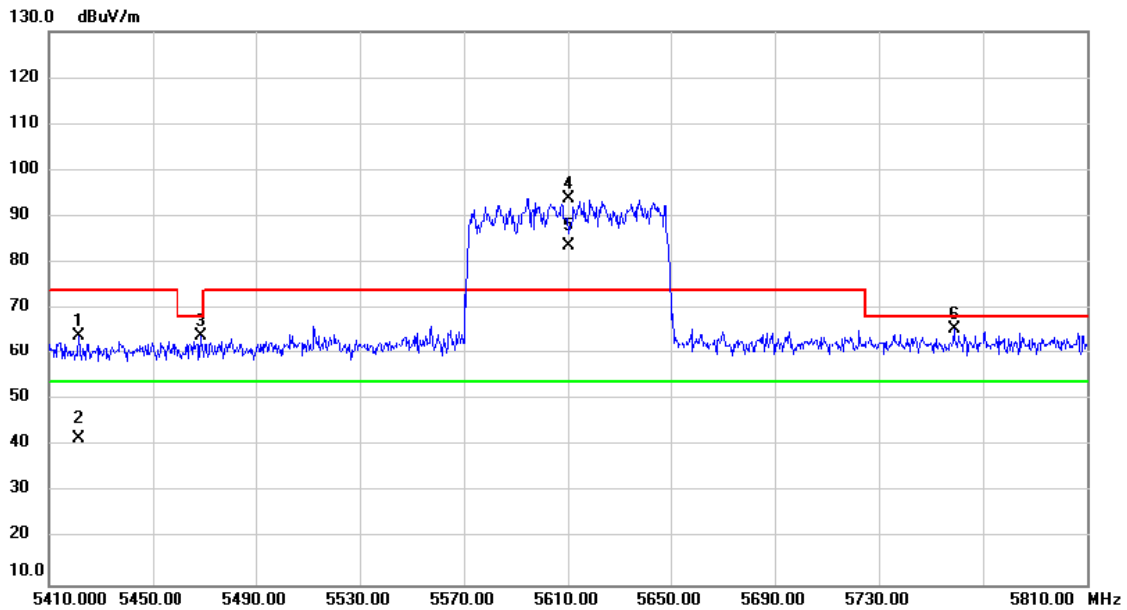


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5421.600	26.52	37.54	64.06	74.00	-9.94	peak	
2		5421.600	4.13	37.54	41.67	54.00	-12.33	AVG	
3		5468.800	26.67	37.58	64.25	68.20	-3.95	peak	
4	X	5610.000	56.04	37.84	93.88	74.00	19.88	peak	No Limit
5	*	5610.000	45.77	37.84	83.61	54.00	29.61	AVG	No Limit
6		5758.800	27.56	38.16	65.72	68.20	-2.48	peak	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UnII-3/TX Ac (VHT80) Mode 5775MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

Orthogonal Axis: X

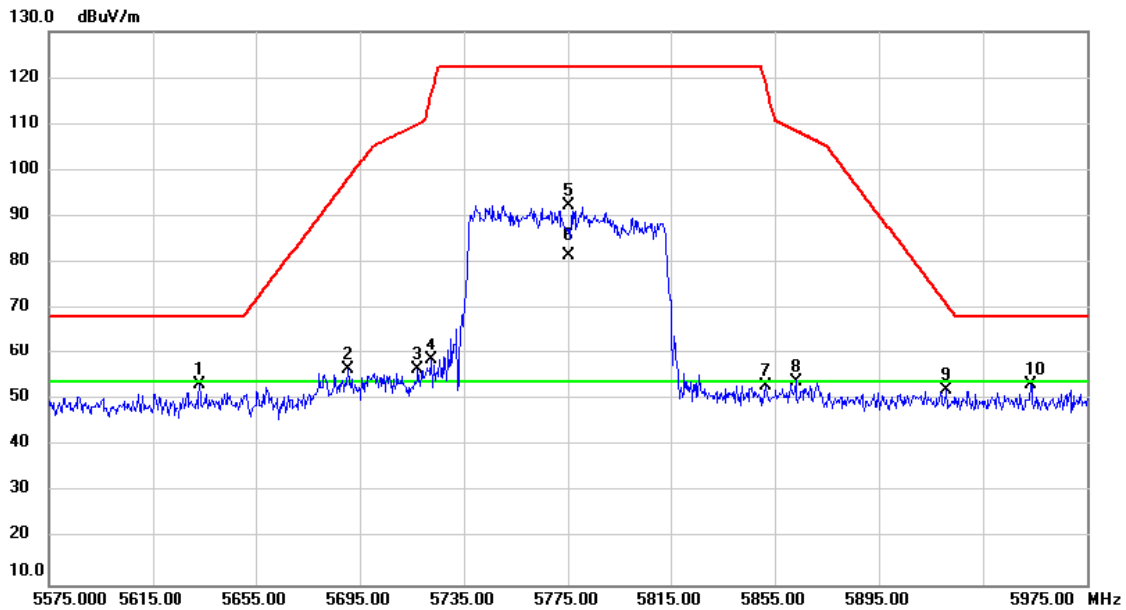


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5633.400	15.31	37.90	53.21	68.20	-14.99	peak	
2		5690.600	18.76	38.02	56.78	98.27	-41.49	peak	
3		5717.400	18.48	38.07	56.55	110.07	-53.52	peak	
4		5722.600	20.66	38.09	58.75	116.73	-57.98	peak	
5		5775.000	54.27	38.20	92.47	122.20	-29.73	peak	No Limit
6	*	5775.000	43.24	38.20	81.44	54.00	27.44	AVG	No Limit
7		5851.400	14.81	38.36	53.17	119.01	-65.84	peak	
8		5863.000	15.71	38.39	54.10	108.56	-54.46	peak	
9		5921.000	13.74	38.52	52.26	71.15	-18.89	peak	
10		5953.400	14.77	38.58	53.35	68.20	-14.85	peak	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.

Test Mode	UNII-1/ TX A Mode 5180MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: X

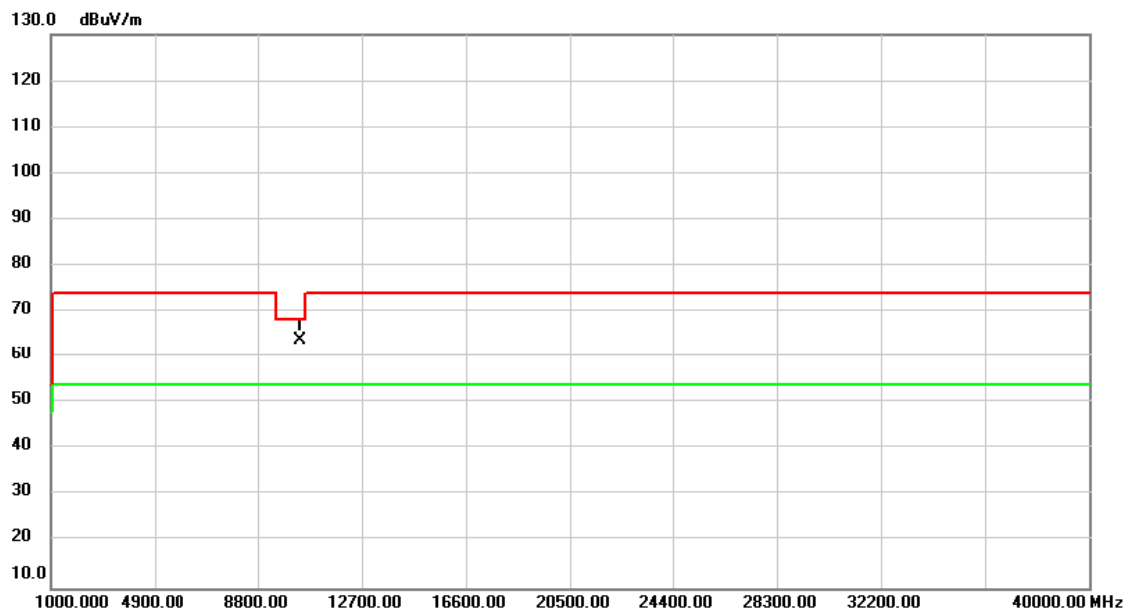

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	58.96	4.85	63.81	68.20	-4.39	peak	

Test Mode	UNII-1/ TX A Mode 5180MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

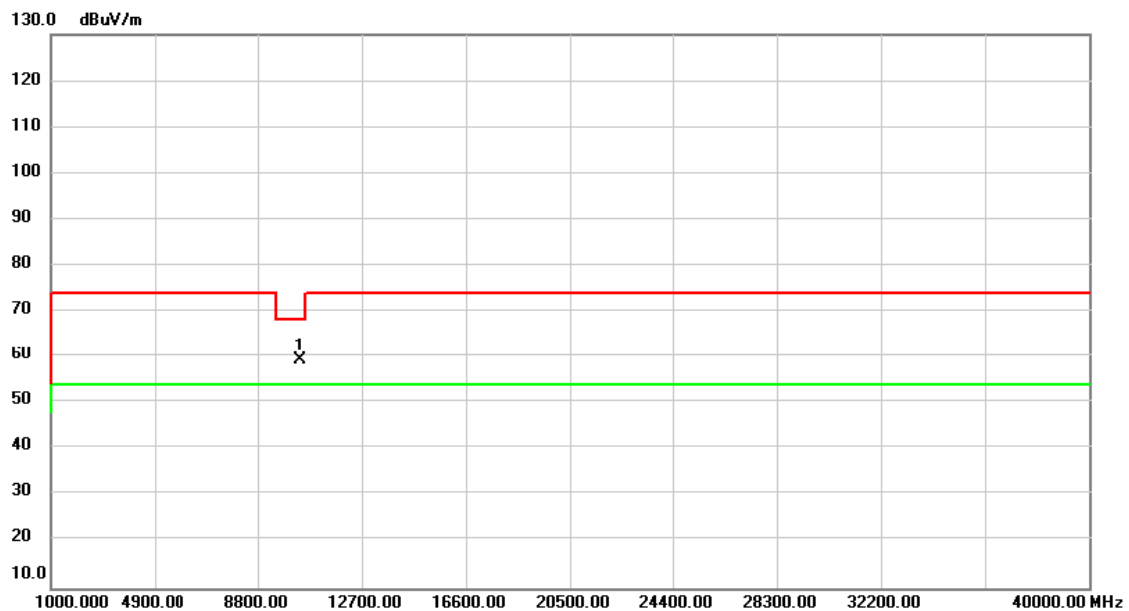

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	54.40	4.85	59.25	68.20	-8.95	peak	

Test Mode	UNII-1/ TX A Mode 5200MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: X

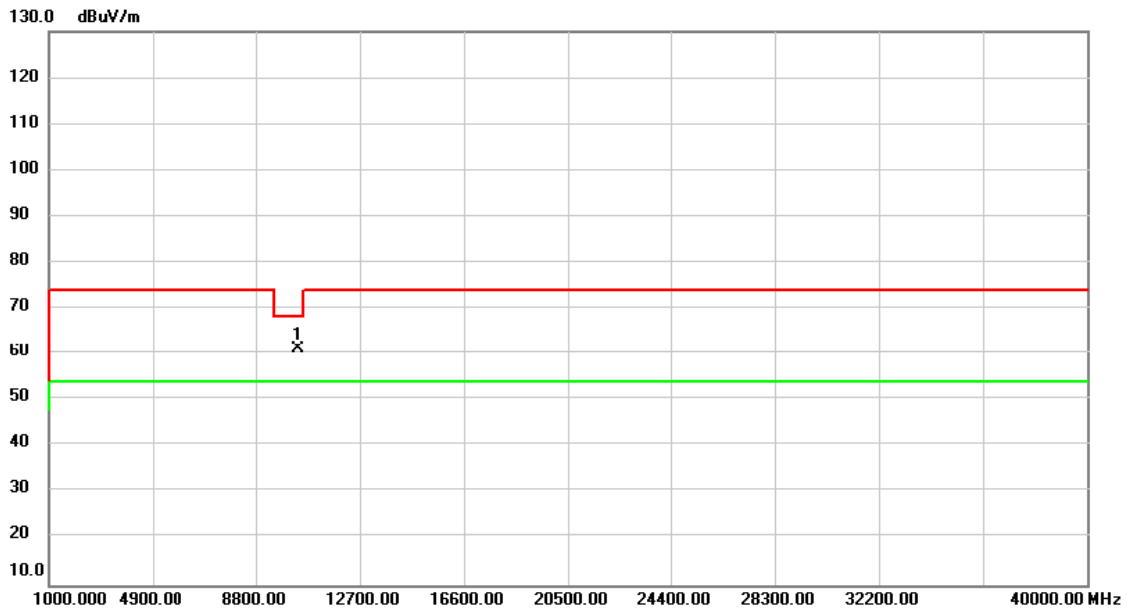

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	56.29	4.94	61.23	68.20	-6.97	peak	

Test Mode	UNII-1/ TX A Mode 5200MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

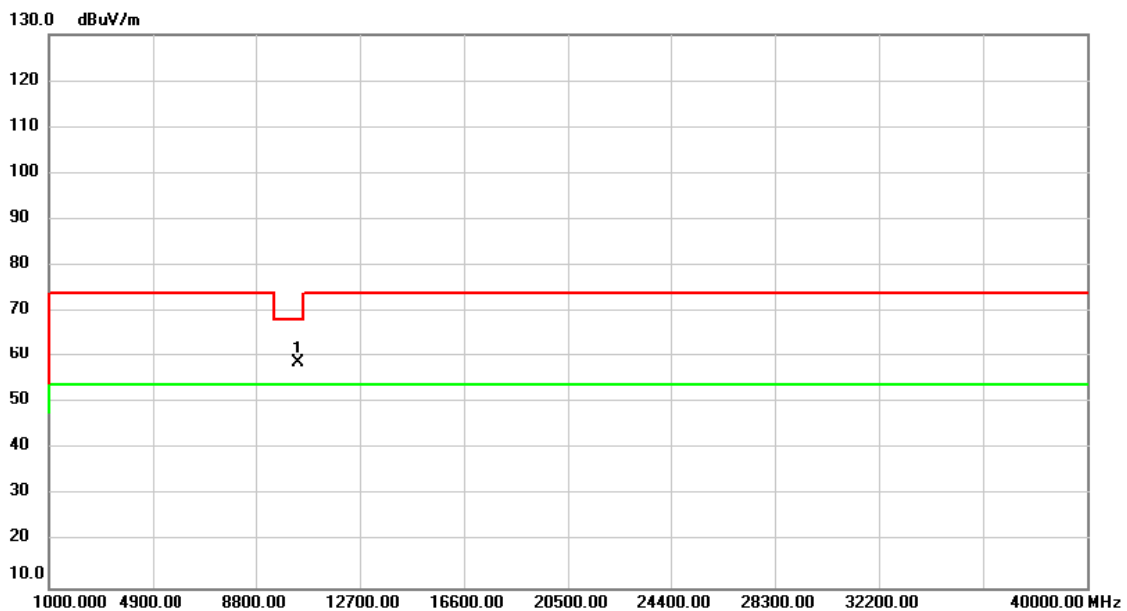

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	53.89	4.94	58.83	68.20	-9.37	peak	

Test Mode	UNII-1/ TX A Mode 5240MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: X

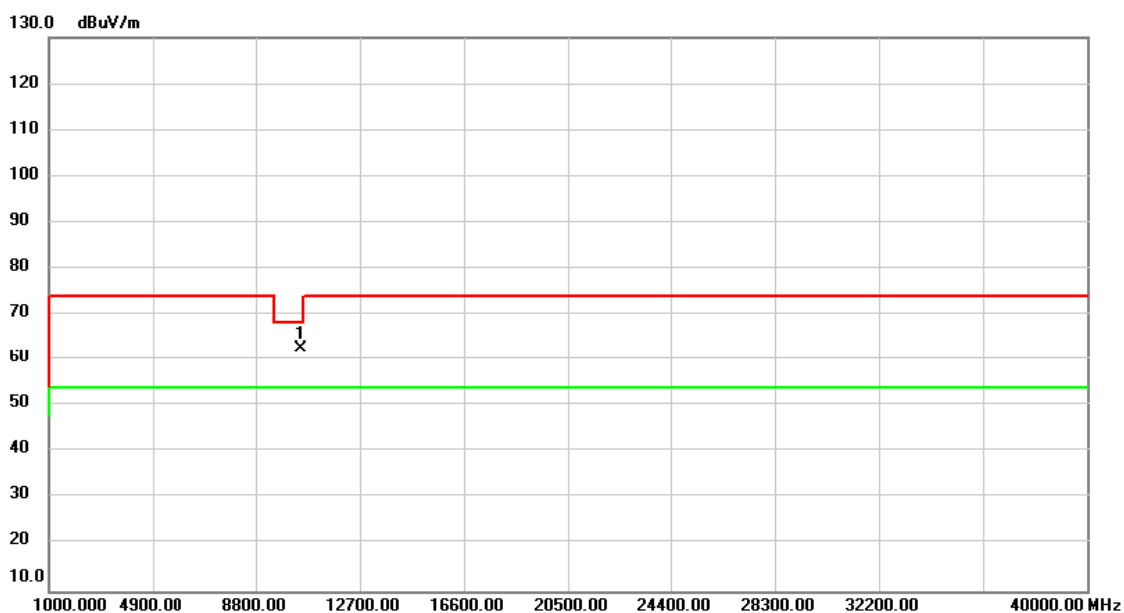

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	57.45	5.15	62.60	68.20	-5.60	peak	

Test Mode	UNII-1/ TX A Mode 5240MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

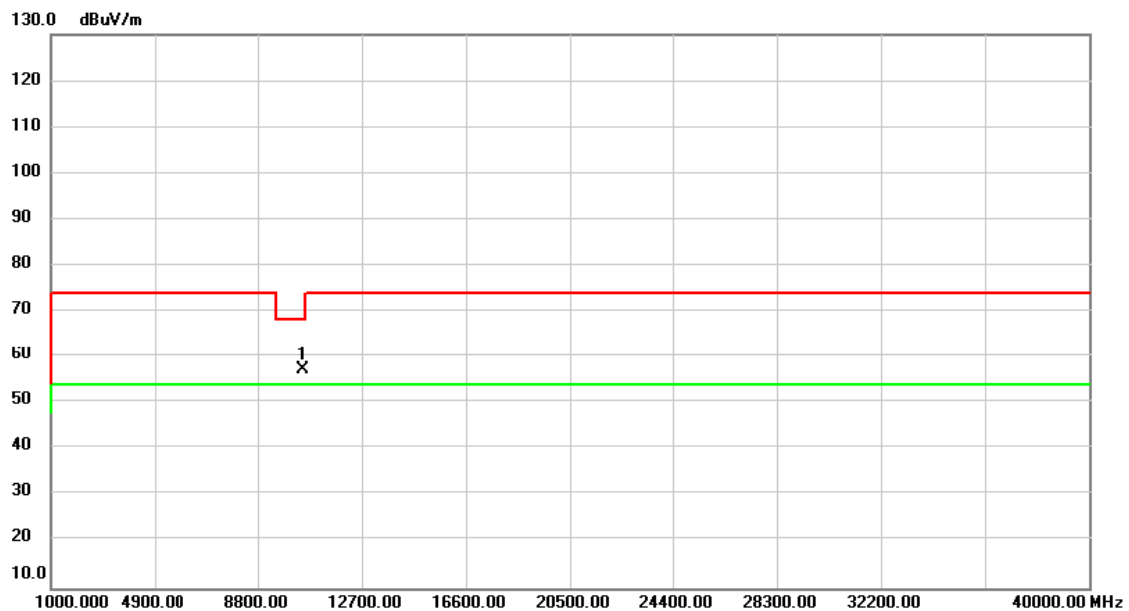

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	52.12	5.15	57.27	68.20	-10.93	peak	

Test Mode	UNII-2A/ TX A Mode 5260MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------


Orthogonal Axis: X

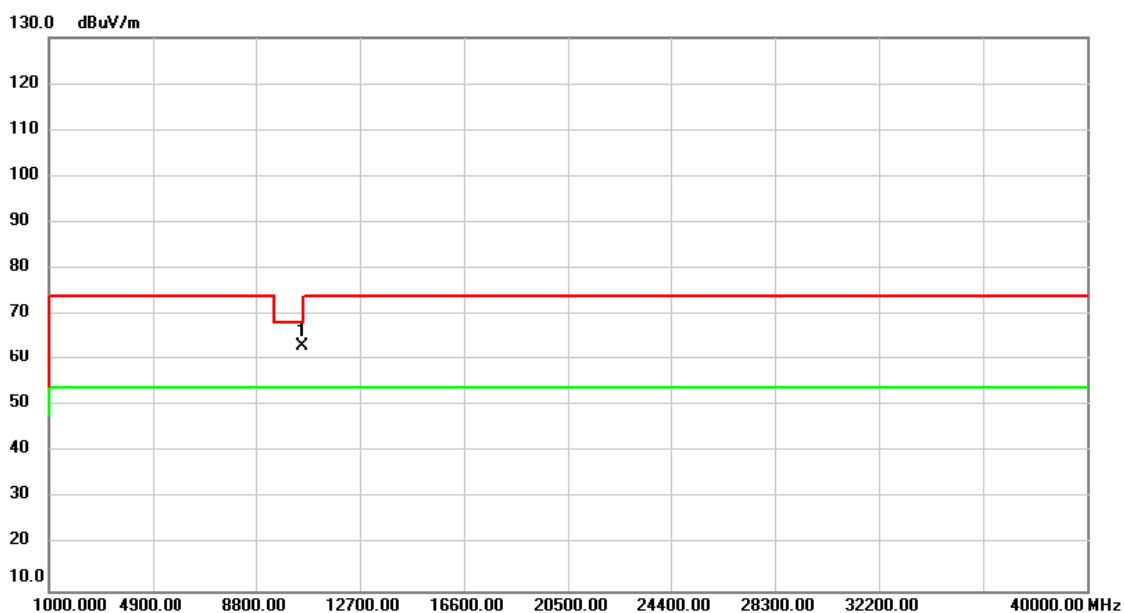

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10520.00	58.02	5.24	63.26	68.20	-4.94	peak	

Test Mode	UNII-2A/ TX A Mode 5260MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

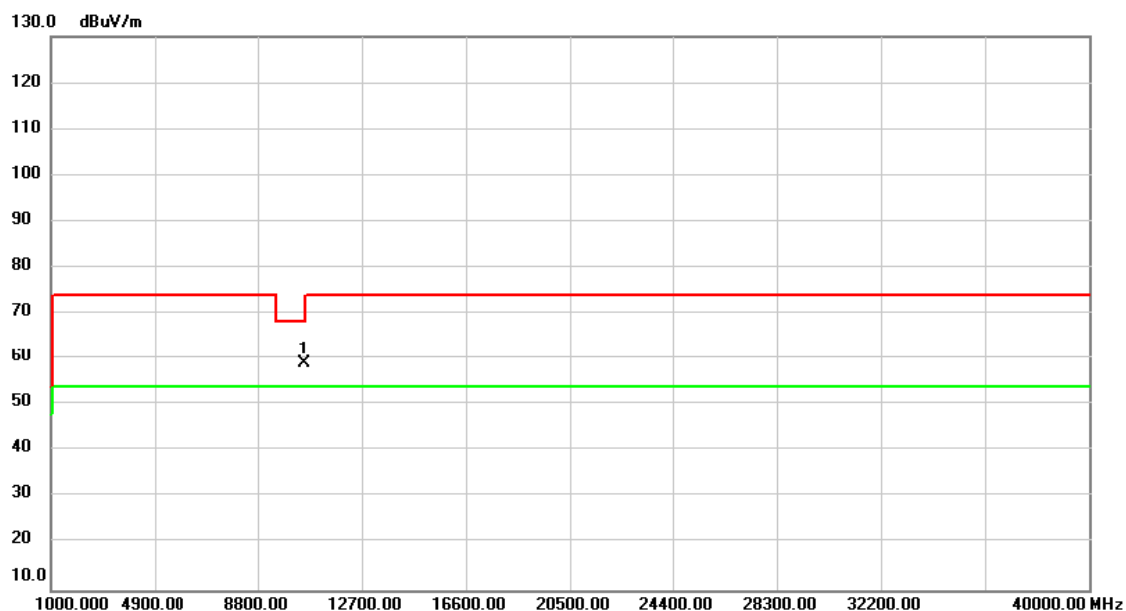

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	53.90	5.24	59.14	68.20	-9.06	peak	

Test Mode	UNII-2A/ TX A Mode 5300MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------


Orthogonal Axis: X

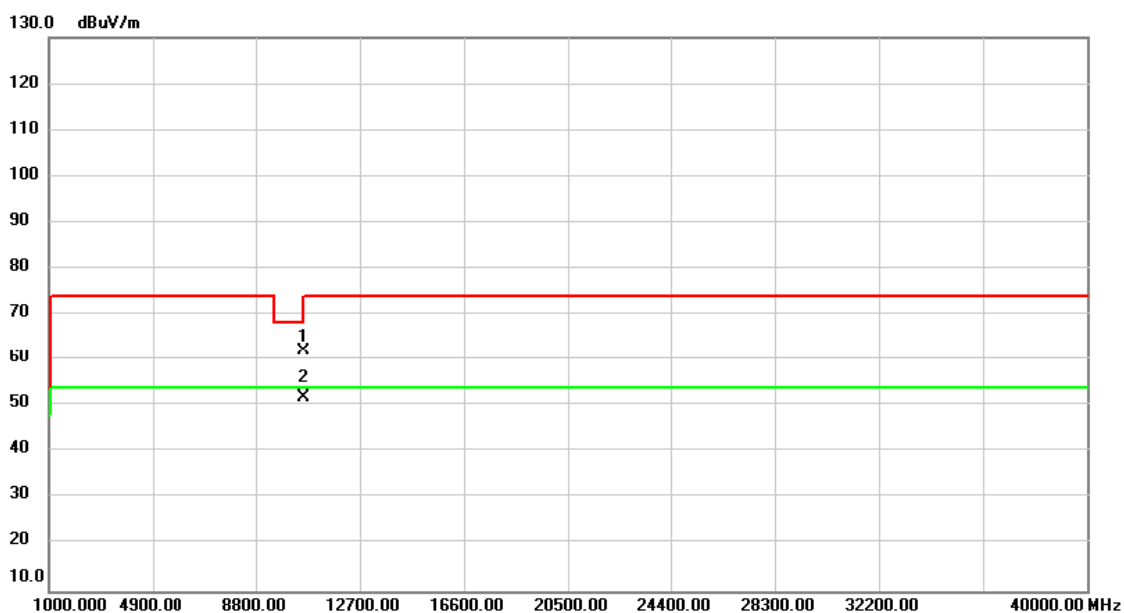

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	56.71	5.41	62.12	68.20	-6.08	peak	
2	*	10600.00	46.29	5.41	51.70	54.00	-2.30	AVG	

Test Mode	UNII-2A/ TX A Mode 5300MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

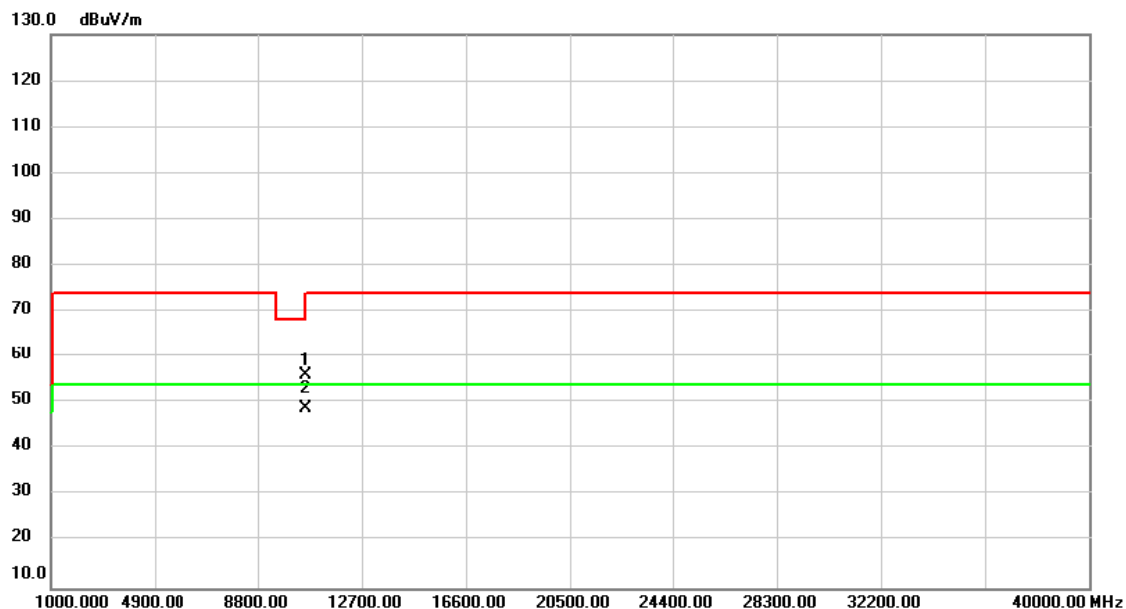

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	50.76	5.41	56.17	68.20	-12.03	peak	
2	*	10600.00	43.39	5.41	48.80	54.00	-5.20	AVG	

Test Mode	UNII-2A/ TX A Mode 5320MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------


Orthogonal Axis: X

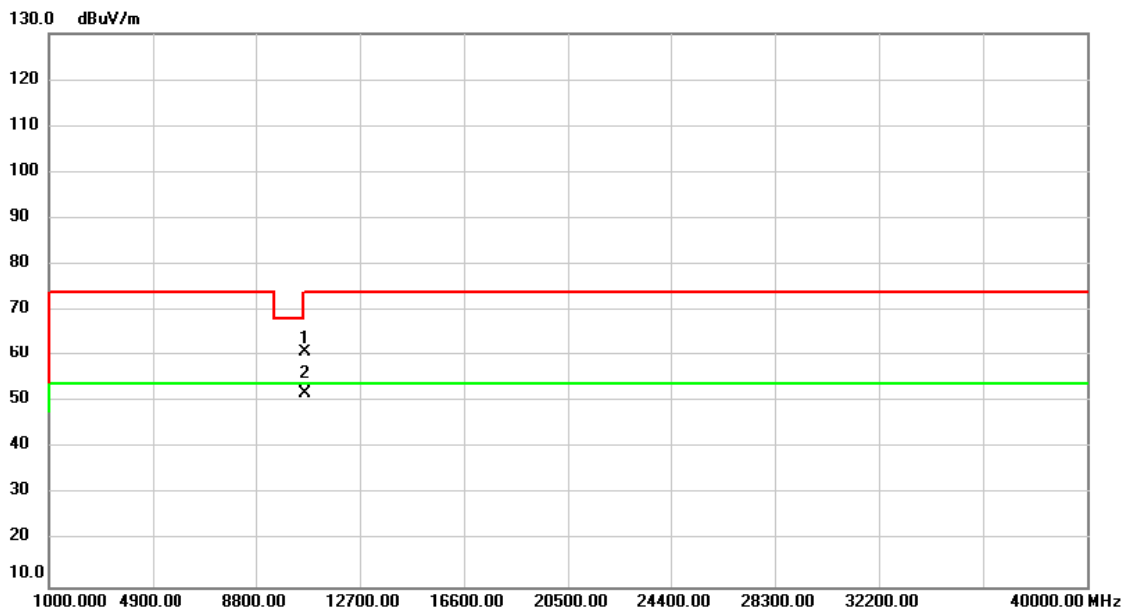

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	55.51	5.49	61.00	74.00	-13.00	peak	
2	*	10640.00	46.24	5.49	51.73	54.00	-2.27	AVG	

Test Mode	UNII-2A/ TX A Mode 5320MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

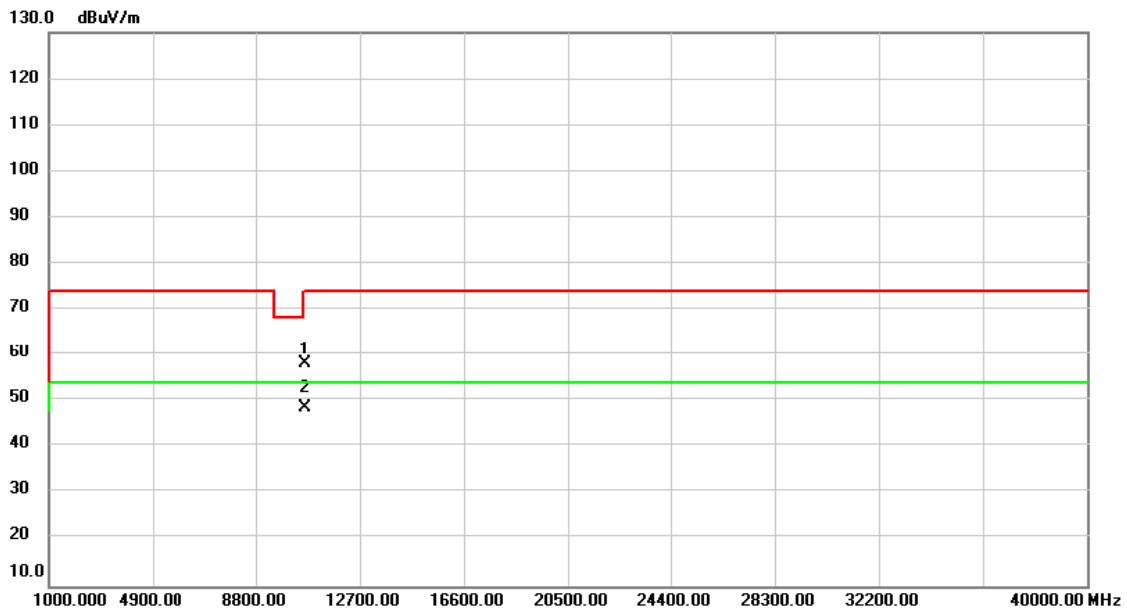

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	52.58	5.49	58.07	74.00	-15.93	peak	
2	*	10640.00	42.94	5.49	48.43	54.00	-5.57	AVG	

Test Mode	UNII-2C/ TX A Mode 5500MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------


Orthogonal Axis: X

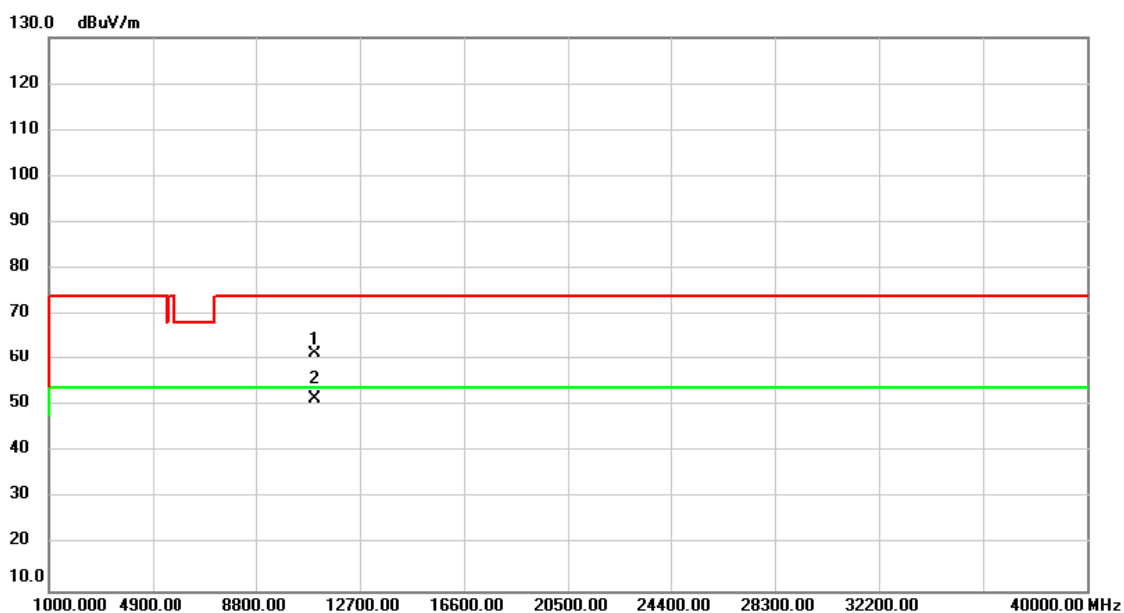

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	55.24	6.24	61.48	74.00	-12.52	peak	
2	*	11000.00	45.37	6.24	51.61	54.00	-2.39	AVG	

Test Mode	UNII-2C/ TX A Mode 5500MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

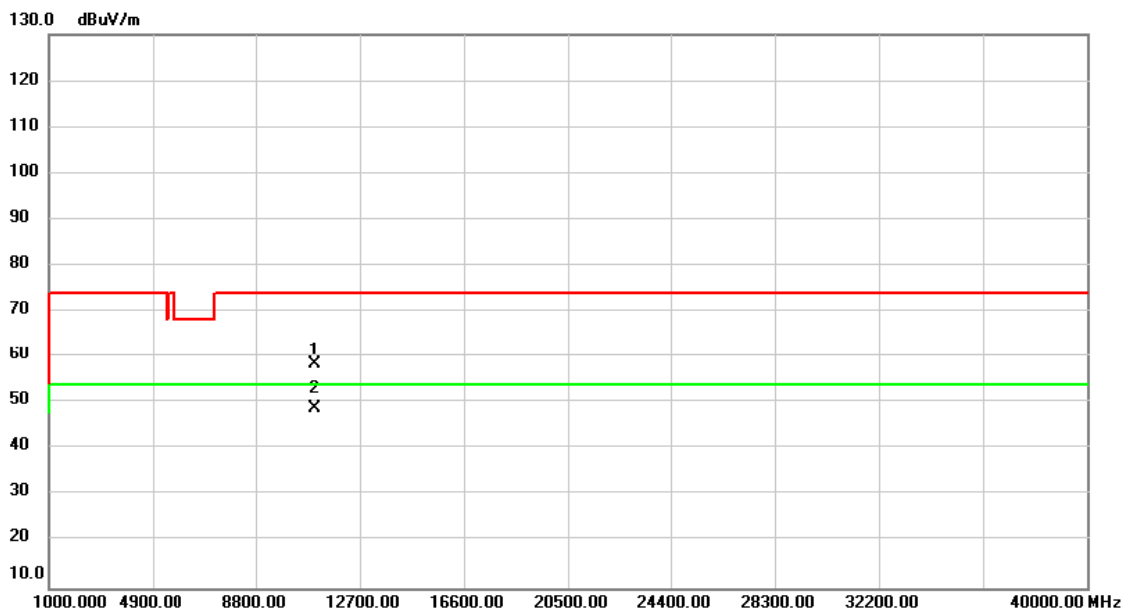

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	52.30	6.24	58.54	74.00	-15.46	peak	
2	*	11000.00	42.49	6.24	48.73	54.00	-5.27	AVG	

Test Mode	UNII-2C/ TX A Mode 5580MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

Orthogonal Axis: X

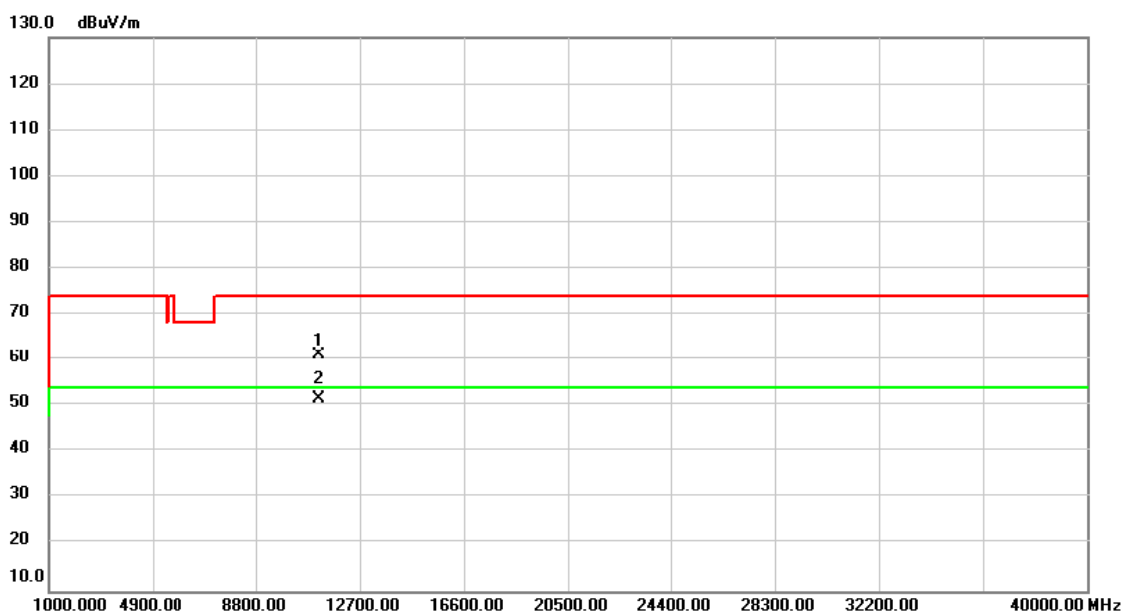

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	55.27	5.85	61.12	74.00	-12.88	peak	
2	*	11160.00	45.64	5.85	51.49	54.00	-2.51	AVG	

Test Mode	UNII-2C/ TX A Mode 5580MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	53.51	5.85	59.36	74.00	-14.64	peak	
2	*	11160.00	42.63	5.85	48.48	54.00	-5.52	AVG	

Test Mode	UNII-2C/ TX A Mode 5700MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------


Orthogonal Axis: X

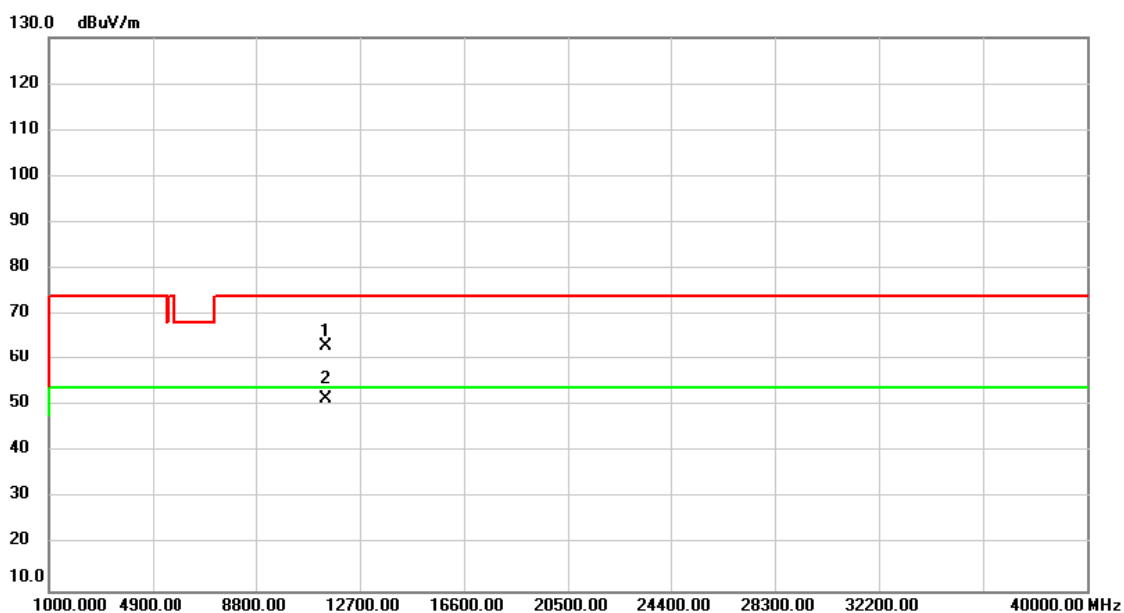

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	57.88	5.27	63.15	74.00	-10.85	peak	
2	*	11400.00	46.37	5.27	51.64	54.00	-2.36	AVG	

Test Mode	UNII-2C/ TX A Mode 5700MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

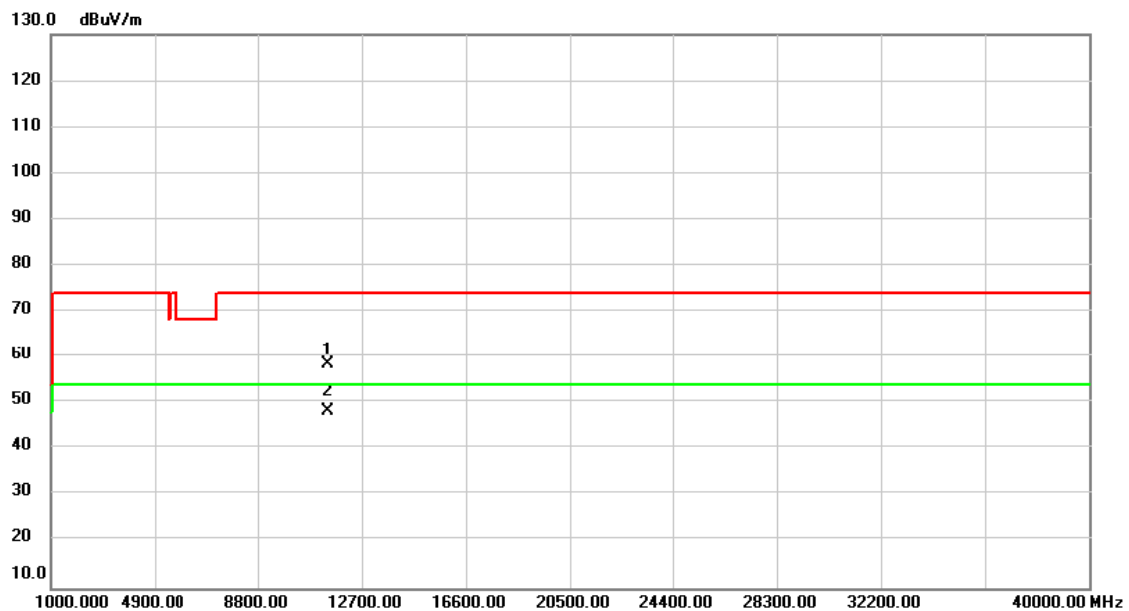

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	53.07	5.27	58.34	74.00	-15.66	peak	
2	*	11400.00	42.86	5.27	48.13	54.00	-5.87	AVG	

Test Mode	UNII-3/ TX A Mode 5745MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: X

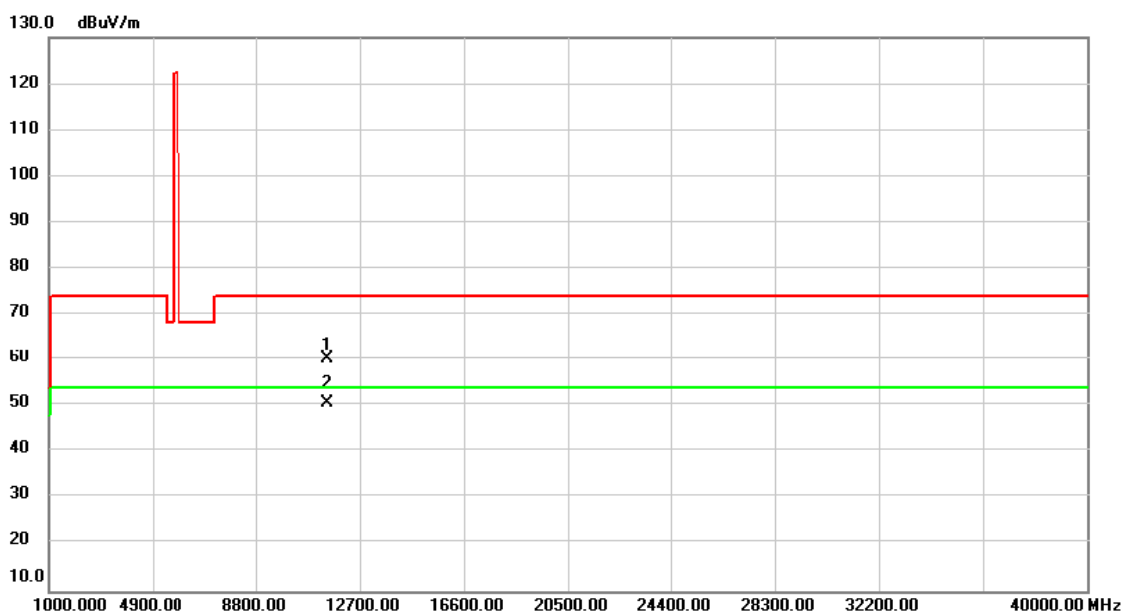

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	55.13	5.05	60.18	74.00	-13.82	peak	
2	*	11490.00	45.58	5.05	50.63	54.00	-3.37	AVG	

Test Mode	UNII-3/ TX A Mode 5745MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

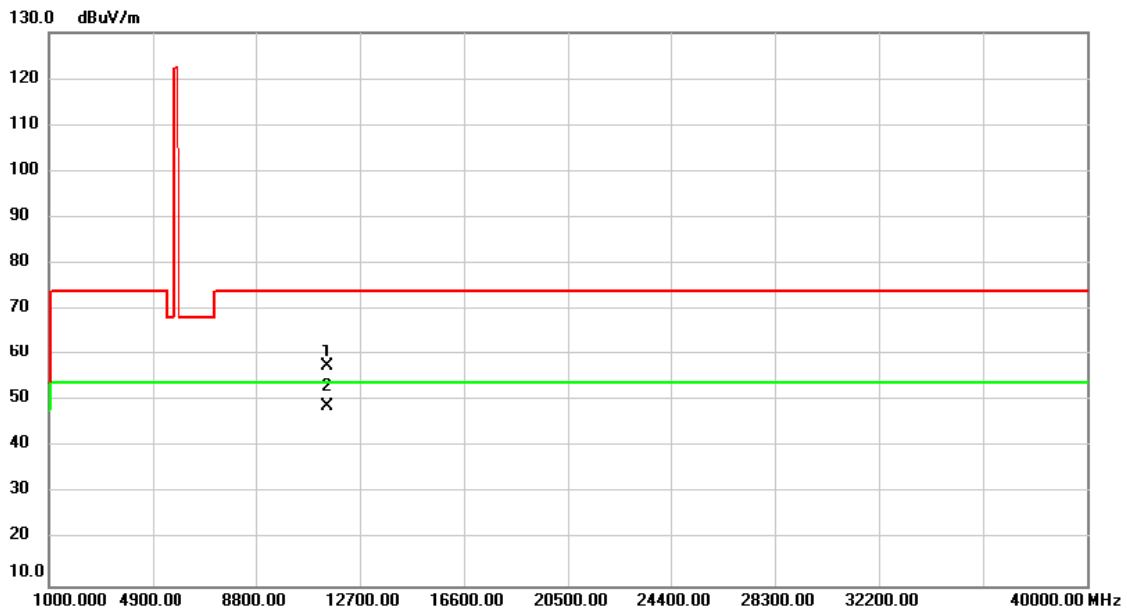

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	52.37	5.05	57.42	74.00	-16.58	peak	
2	*	11490.00	43.72	5.05	48.77	54.00	-5.23	AVG	

Test Mode	UNII-3/ TX A Mode 5785MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: X

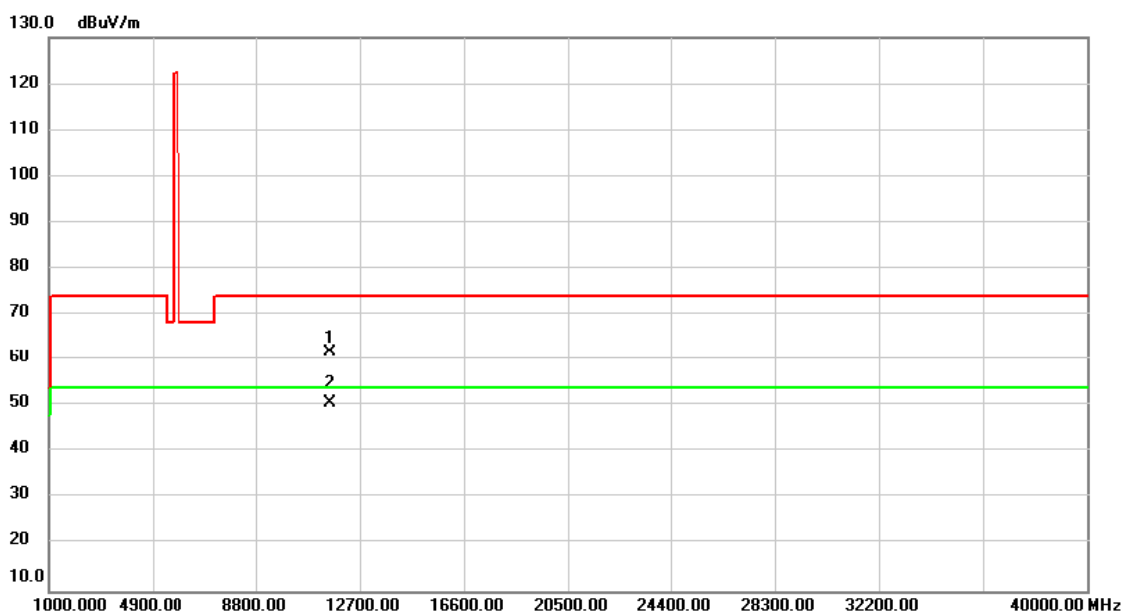

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	56.96	4.87	61.83	74.00	-12.17	peak	
2	*	11570.00	45.85	4.87	50.72	54.00	-3.28	AVG	

Test Mode	UNII-3/ TX A Mode 5785MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

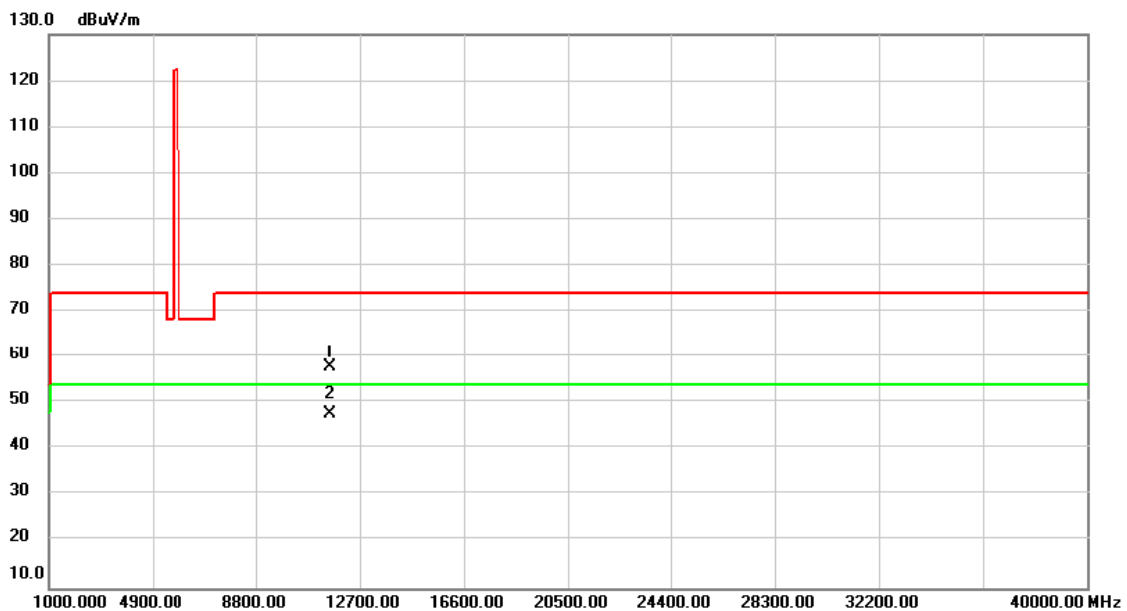

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	53.07	4.87	57.94	74.00	-16.06	peak	
2	*	11570.00	42.89	4.87	47.76	54.00	-6.24	AVG	

Test Mode	UNII-3/ TX A Mode 5825MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------


Orthogonal Axis: X

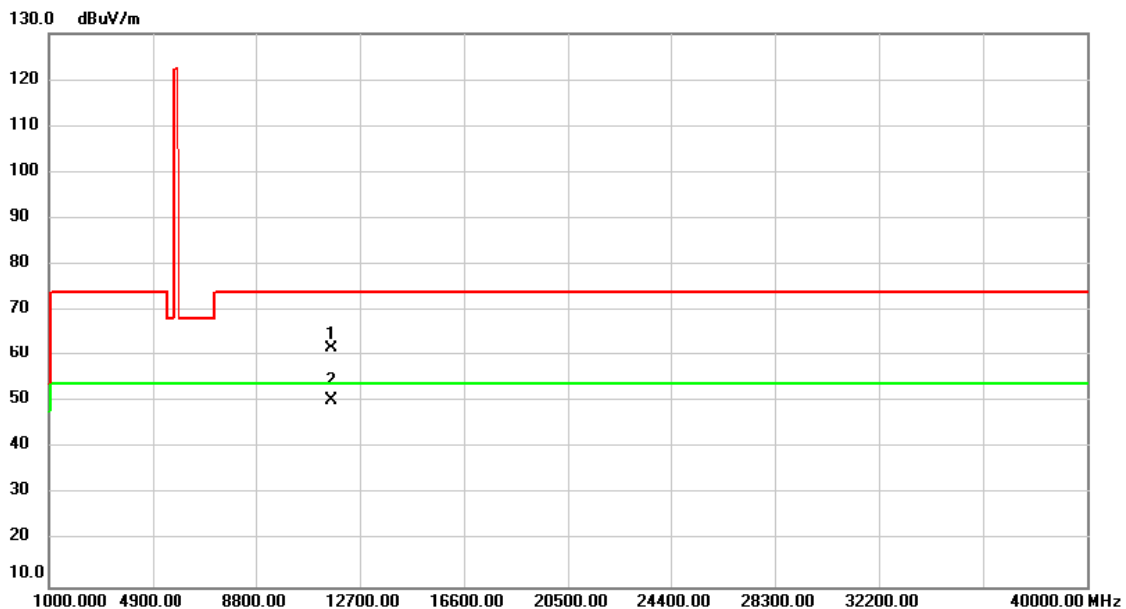

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	57.04	4.69	61.73	74.00	-12.27	peak	
2	*	11650.00	45.63	4.69	50.32	54.00	-3.68	AVG	

Test Mode	UNII-3/ TX A Mode 5825MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

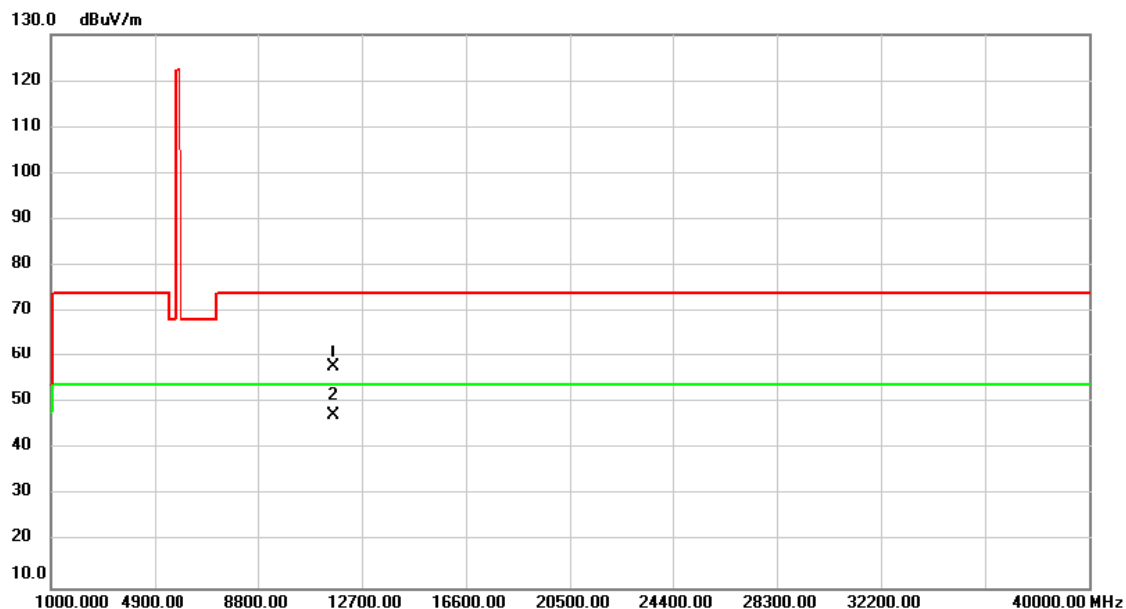

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	53.01	4.69	57.70	74.00	-16.30	peak	
2	*	11650.00	42.54	4.69	47.23	54.00	-6.77	AVG	

Test Mode	UNII-1/TX N (HT20) Mode 5180MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------


Orthogonal Axis: X

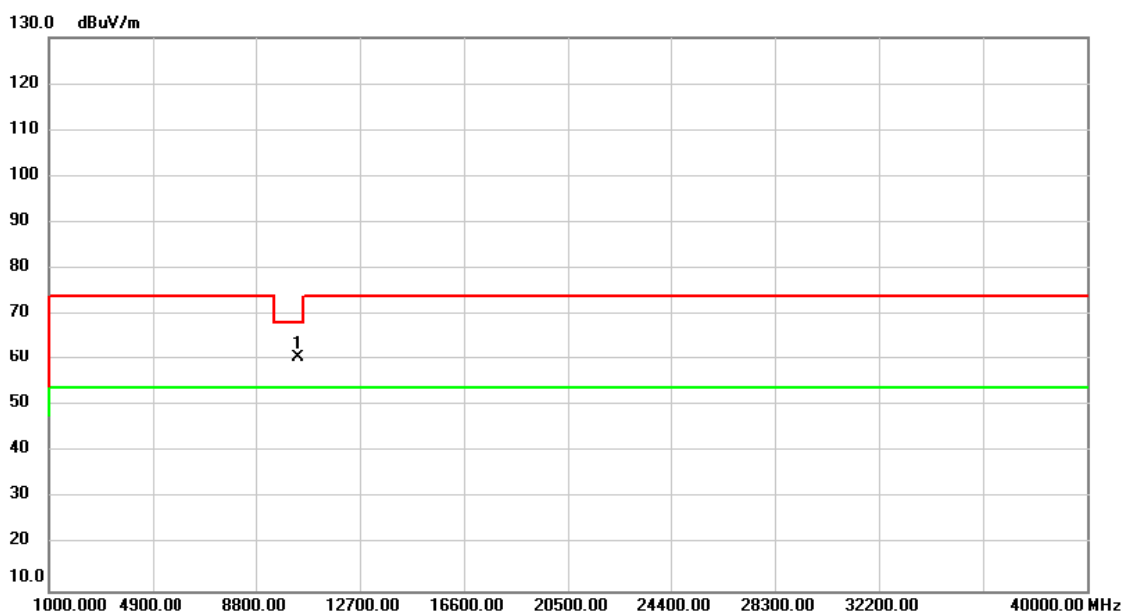

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	55.74	4.85	60.59	68.20	-7.61	peak	

Test Mode	UNII-1/TX N (HT20) Mode 5180MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

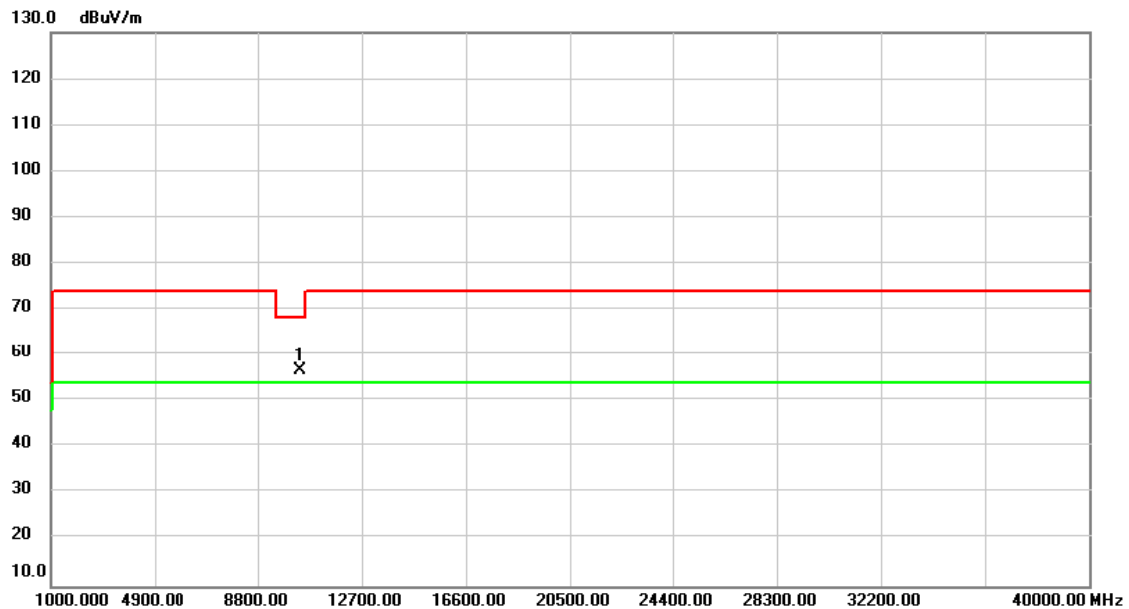

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	51.73	4.85	56.58	68.20	-11.62	peak	

Test Mode	UNII-1/TX N (HT20) Mode 5200MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------


Orthogonal Axis: X

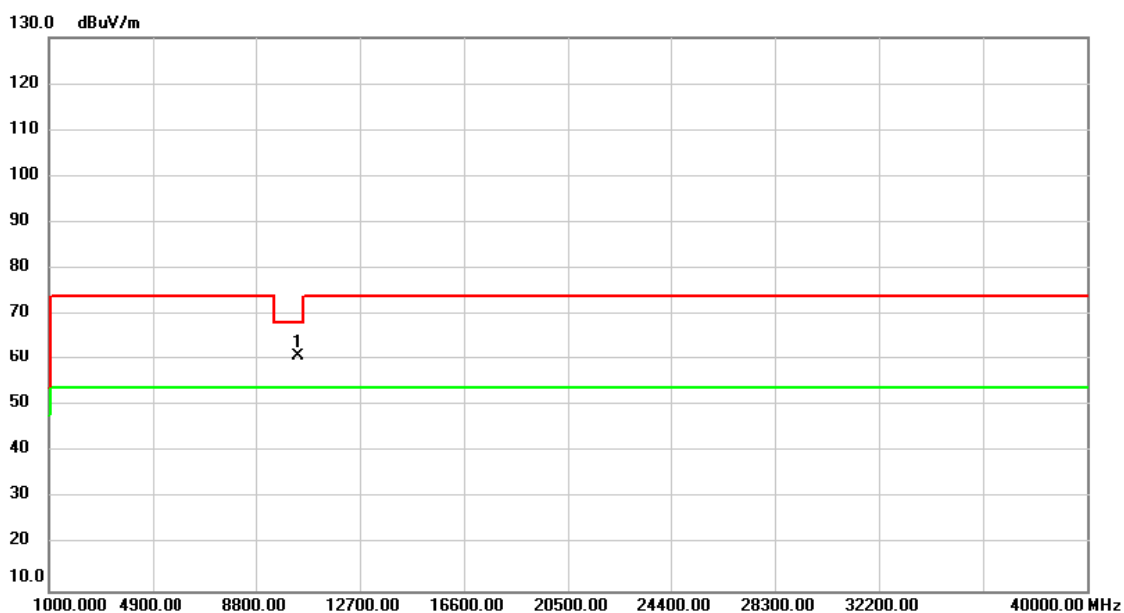

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	55.76	4.94	60.70	68.20	-7.50	peak	

Test Mode	UNII-1/TX N (HT20) Mode 5200MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

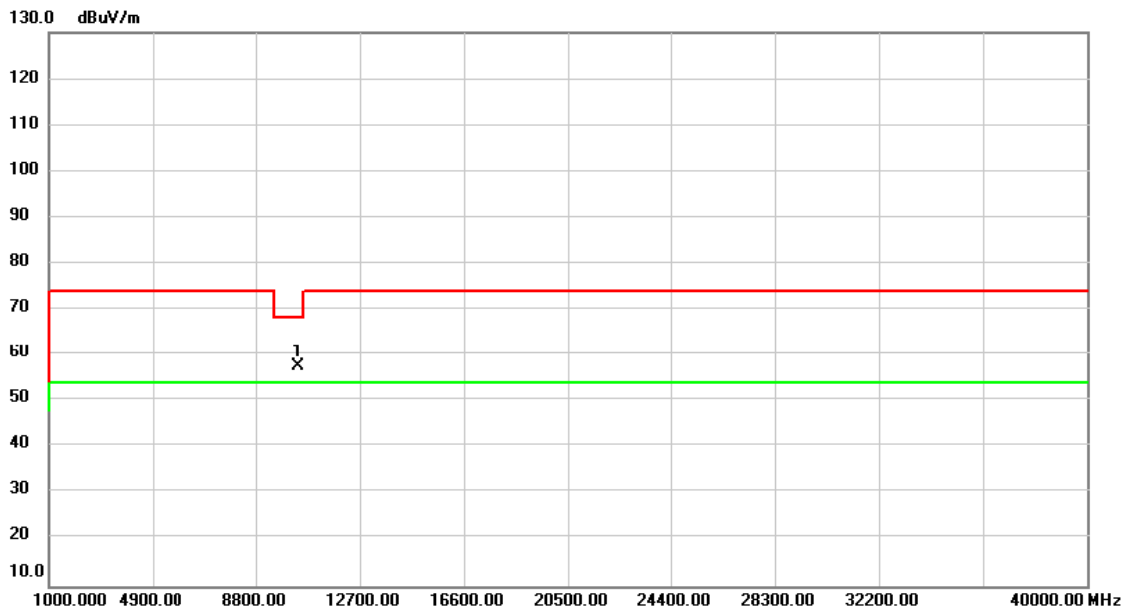

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	52.48	4.94	57.42	68.20	-10.78	peak	

Test Mode	UNII-1/TX N (HT20) Mode 5240MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------


Orthogonal Axis: X

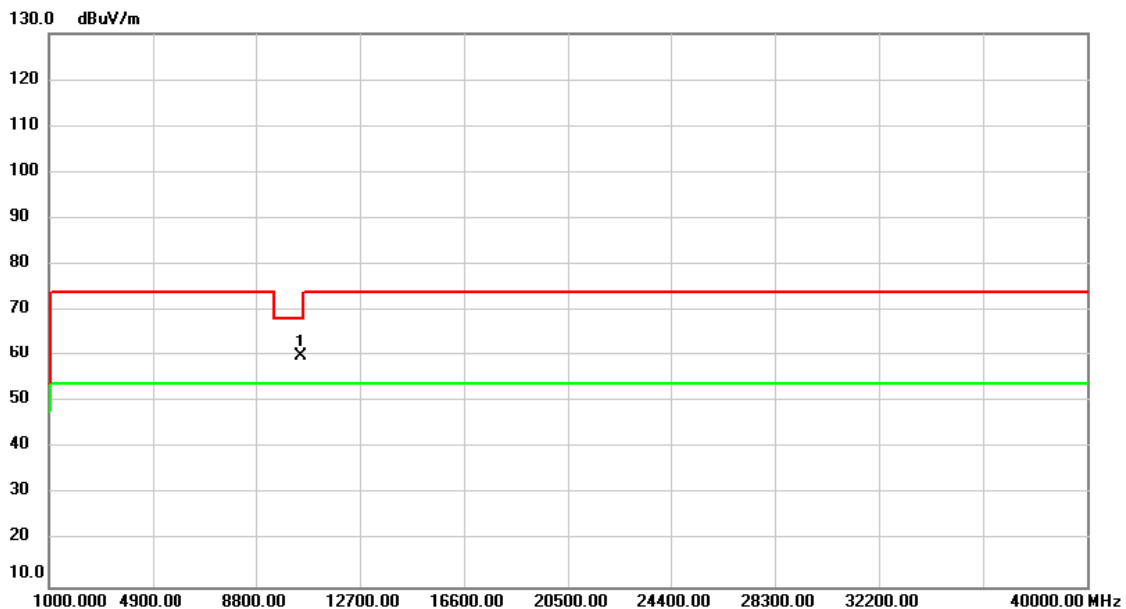

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	54.88	5.15	60.03	68.20	-8.17	peak	

Test Mode	UNII-1/TX N (HT20) Mode 5240MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

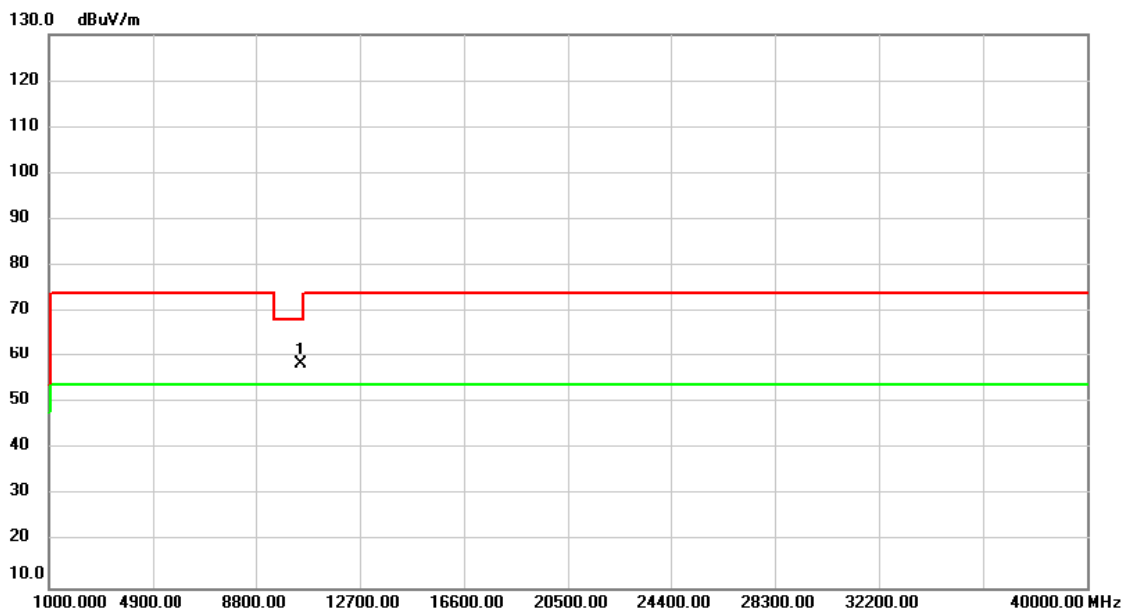

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	53.27	5.15	58.42	68.20	-9.78	peak	

Test Mode	UNII-2A/TX N (HT20) Mode 5260MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------


Orthogonal Axis: X

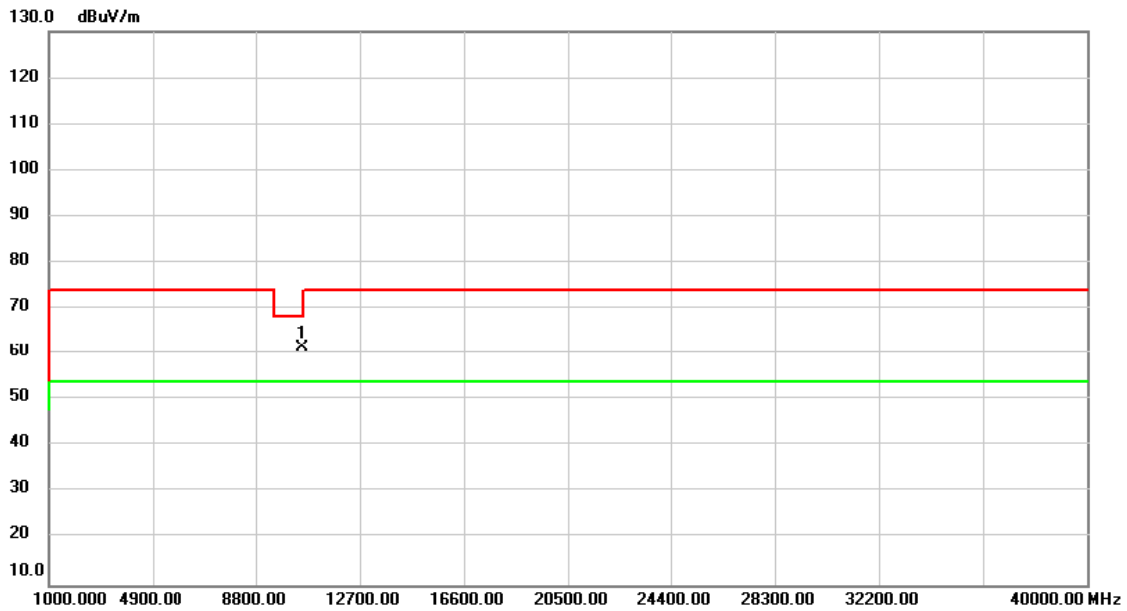

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10520.00	56.23	5.24	61.47	68.20	-6.73	peak	

Test Mode	UNII-2A/TX N (HT20) Mode 5260MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

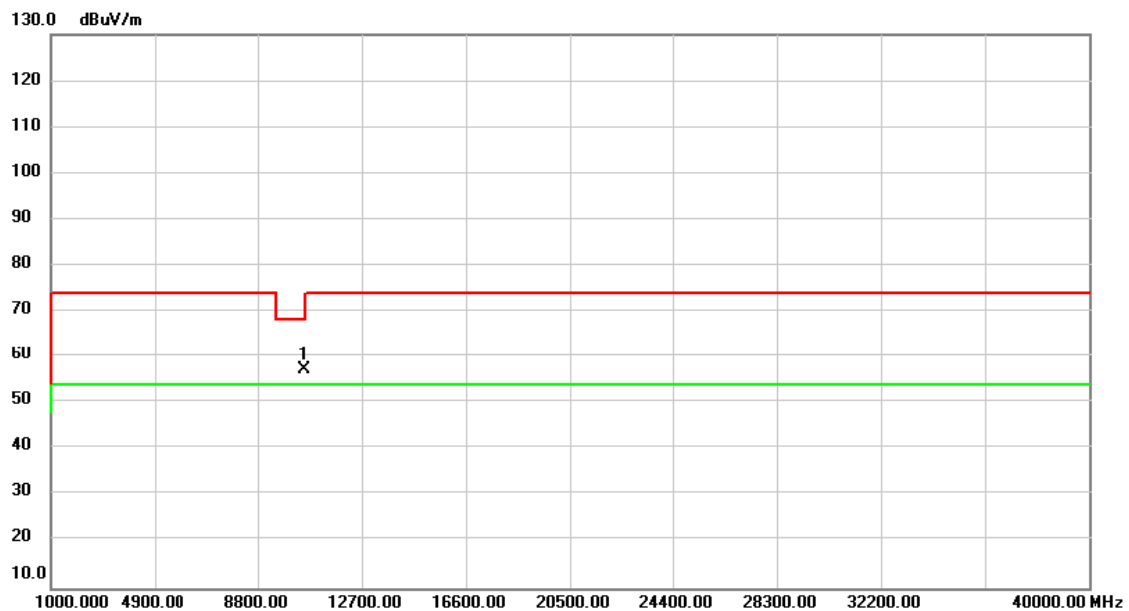

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	51.95	5.24	57.19	68.20	-11.01	peak	

Test Mode	UNII-2A/TX N (HT20) Mode 5300MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------


Orthogonal Axis: X

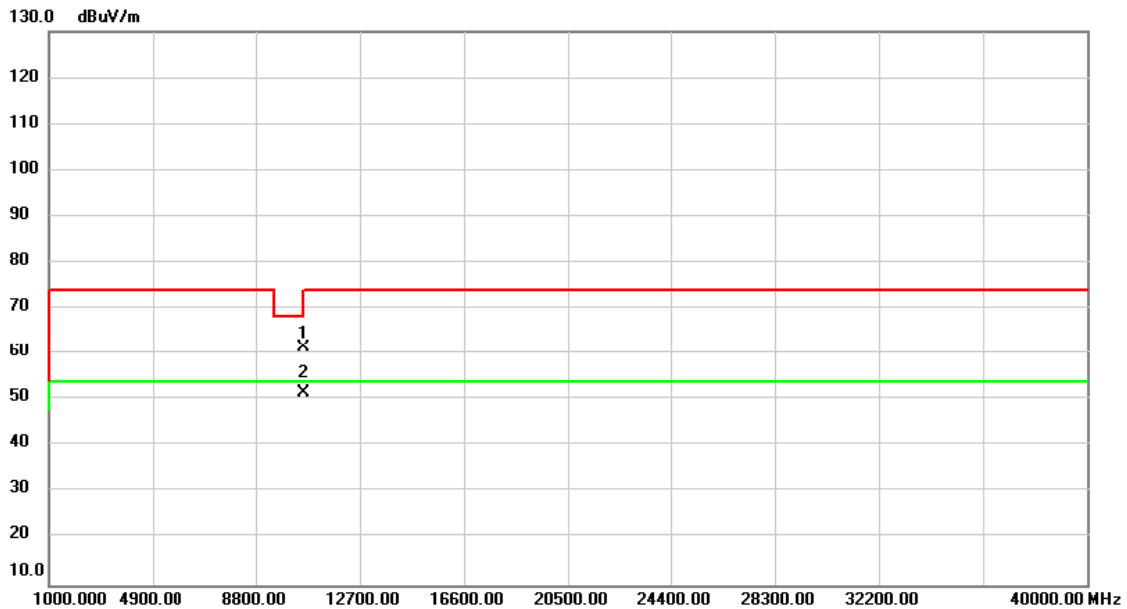

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	56.14	5.41	61.55	68.20	-6.65	peak	
2	*	10600.00	46.21	5.41	51.62	54.00	-2.38	AVG	

Test Mode	UNII-2A/TX N (HT20) Mode 5300MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

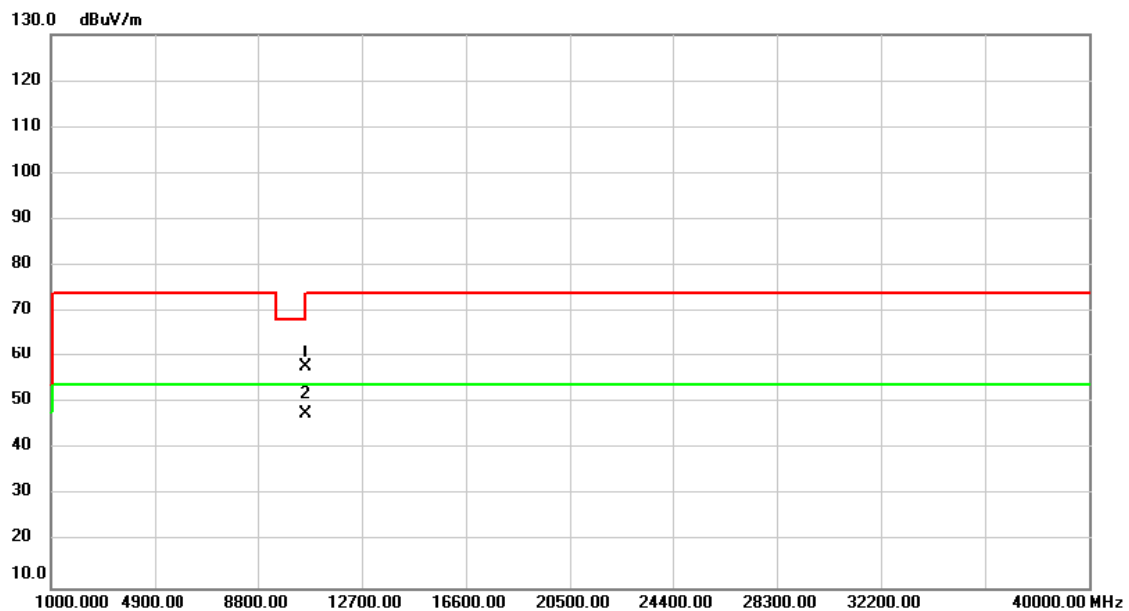

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	52.54	5.41	57.95	68.20	-10.25	peak	
2	*	10600.00	42.37	5.41	47.78	54.00	-6.22	AVG	

Test Mode	UNII-2A/TX N (HT20) Mode 5320MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------


Orthogonal Axis: X

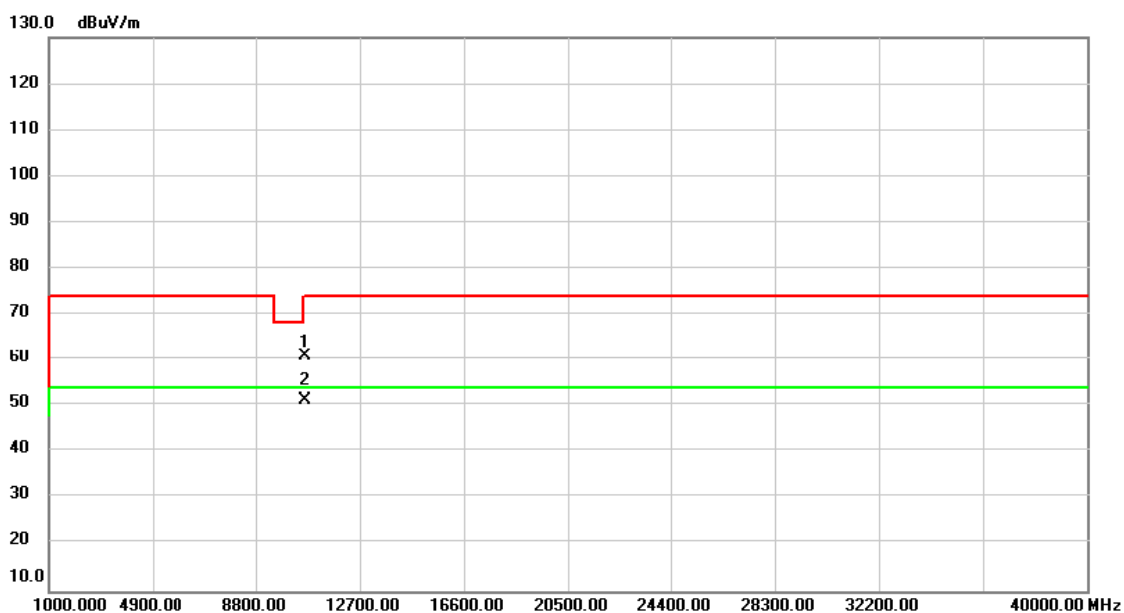

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	55.51	5.49	61.00	74.00	-13.00	peak	
2	*	10640.00	45.82	5.49	51.31	54.00	-2.69	AVG	

Test Mode	UNII-2A/TX N (HT20) Mode 5320MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		

Orthogonal Axis: X

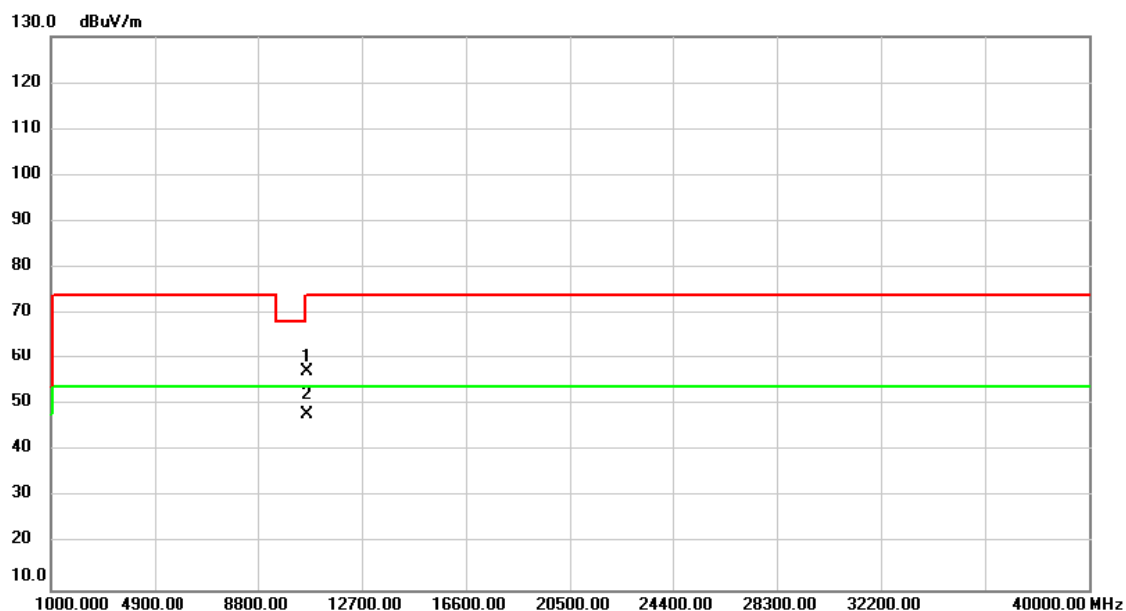

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	51.81	5.49	57.30	74.00	-16.70	peak	
2	*	10640.00	42.54	5.49	48.03	54.00	-5.97	AVG	

Test Mode	UNII-2C/ TX N (HT20) Mode 5500MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------


Orthogonal Axis: X



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	56.01	6.24	62.25	74.00	-11.75	peak	
2	*	11000.00	45.18	6.24	51.42	54.00	-2.58	AVG	

Test Mode	UNII-2C/ TX N (HT20) Mode 5500MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

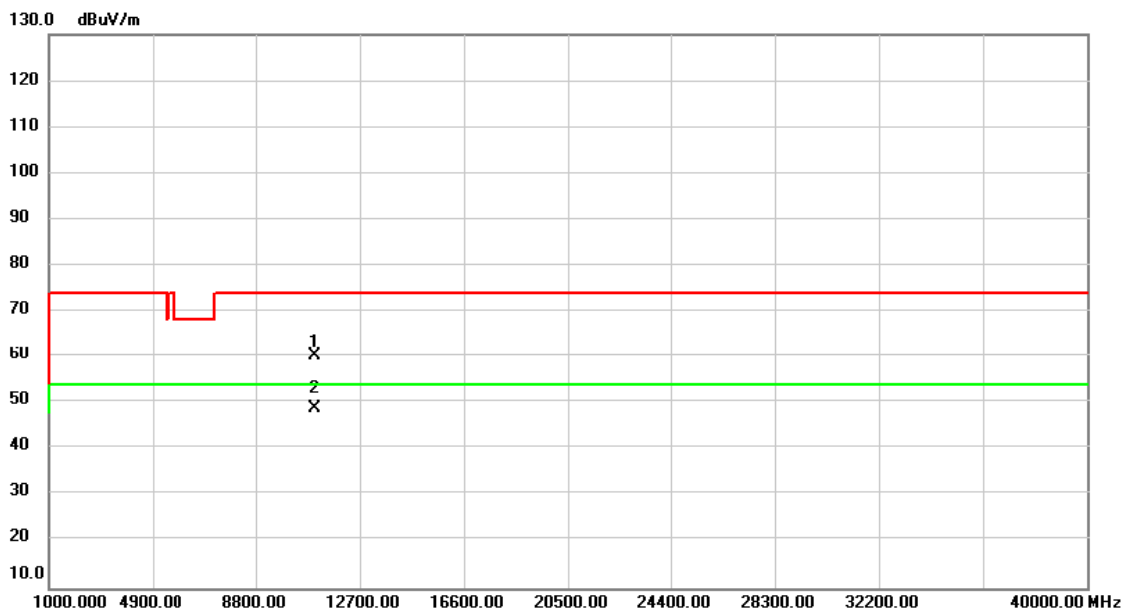

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	53.91	6.24	60.15	74.00	-13.85	peak	
2	*	11000.00	42.61	6.24	48.85	54.00	-5.15	AVG	

Test Mode	UNII-2C/ TX N (HT20) Mode 5580MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

Orthogonal Axis: X

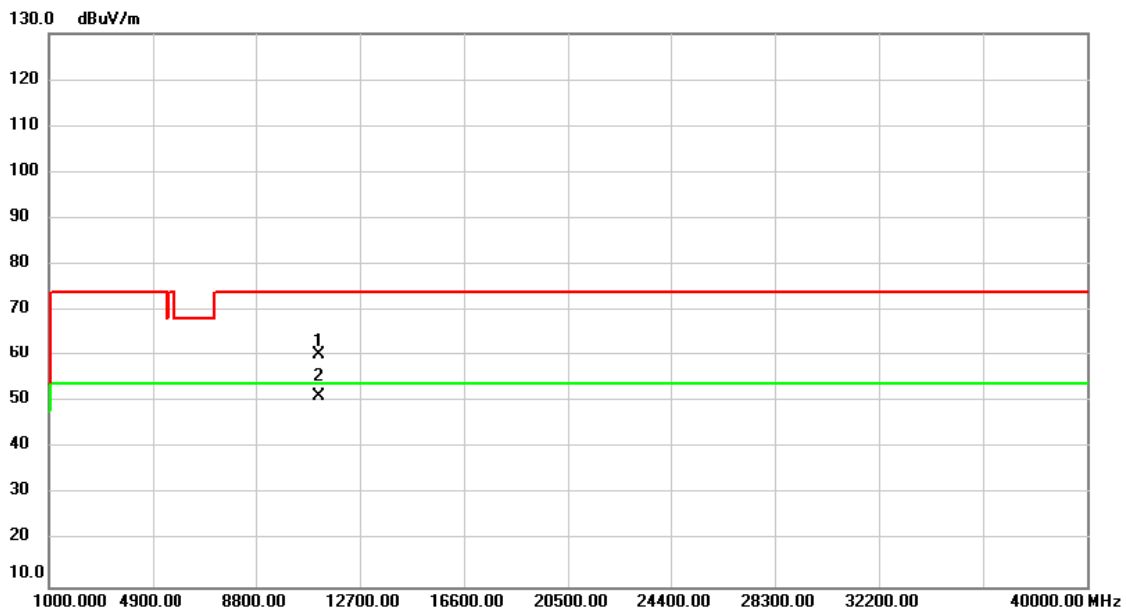

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	54.53	5.85	60.38	74.00	-13.62	peak	
2	*	11160.00	45.41	5.85	51.26	54.00	-2.74	AVG	

Test Mode	UNII-2C/ TX N (HT20) Mode 5580MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	53.02	5.85	58.87	74.00	-15.13	peak	
2	*	11160.00	42.53	5.85	48.38	54.00	-5.62	AVG	

Test Mode	UNII-2C/ TX N (HT20) Mode 5700MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------


Orthogonal Axis: X

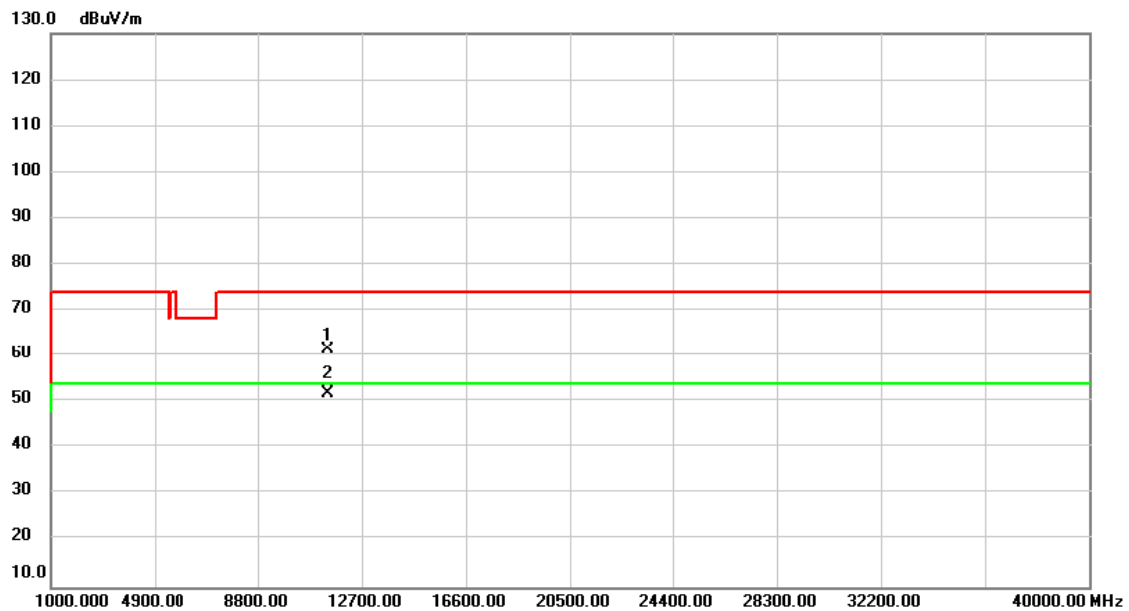

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	56.32	5.27	61.59	74.00	-12.41	peak	
2	*	11400.00	46.51	5.27	51.78	54.00	-2.22	AVG	

Test Mode	UNII-2C/ TX N (HT20) Mode 5700MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

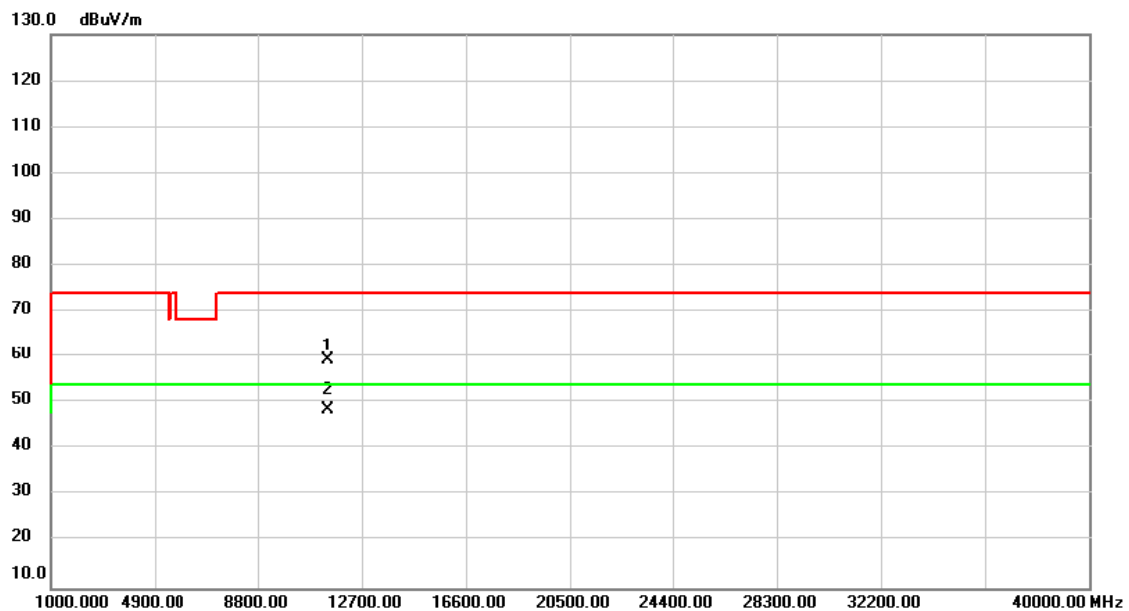

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	54.03	5.27	59.30	74.00	-14.70	peak	
2	*	11400.00	43.15	5.27	48.42	54.00	-5.58	AVG	

Test Mode	UNII-3/ TX N (HT20) Mode 5745MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------


Orthogonal Axis: X

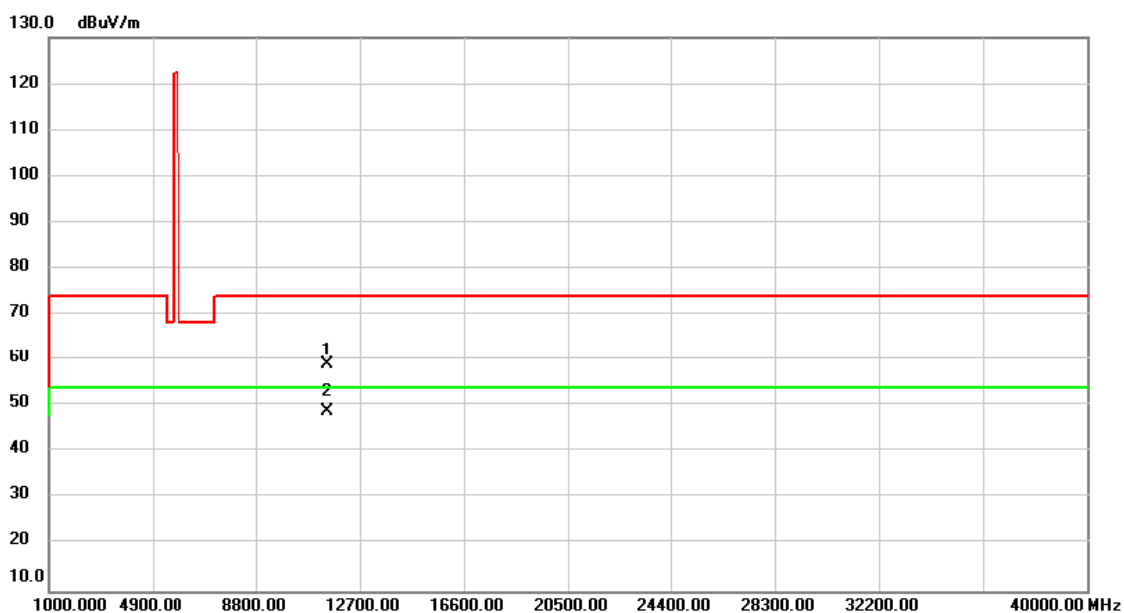

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	53.93	5.05	58.98	74.00	-15.02	peak	
2	*	11490.00	43.79	5.05	48.84	54.00	-5.16	AVG	

Test Mode	UNII-3/ TX N (HT20) Mode 5745MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

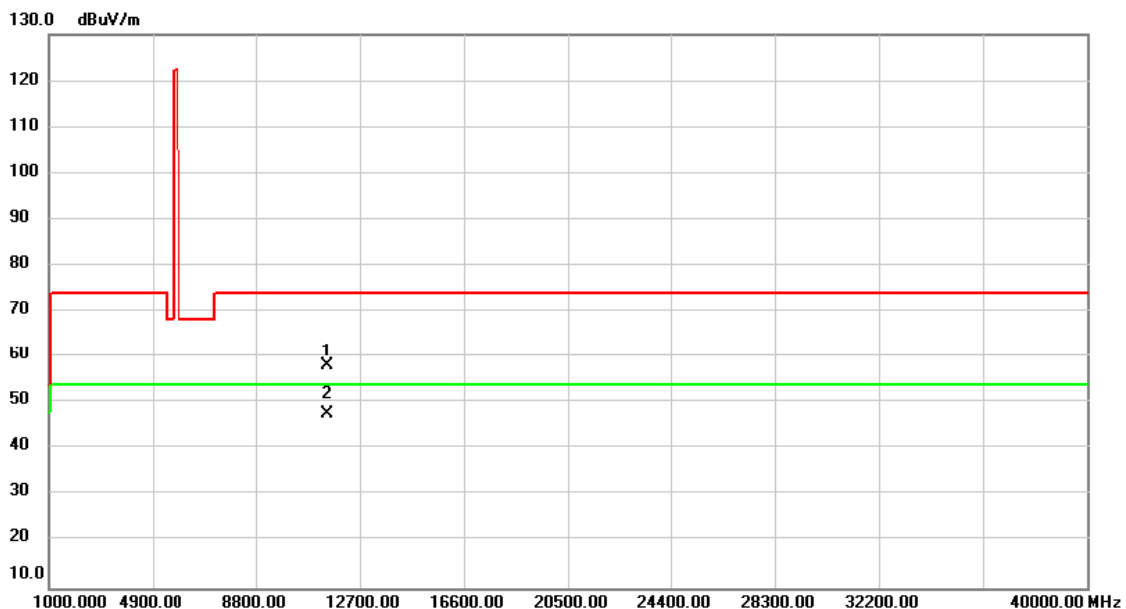

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	52.99	5.05	58.04	74.00	-15.96	peak	
2	*	11490.00	42.49	5.05	47.54	54.00	-6.46	AVG	

Test Mode	UNII-3/ TX N (HT20) Mode 5785MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------


Orthogonal Axis: X

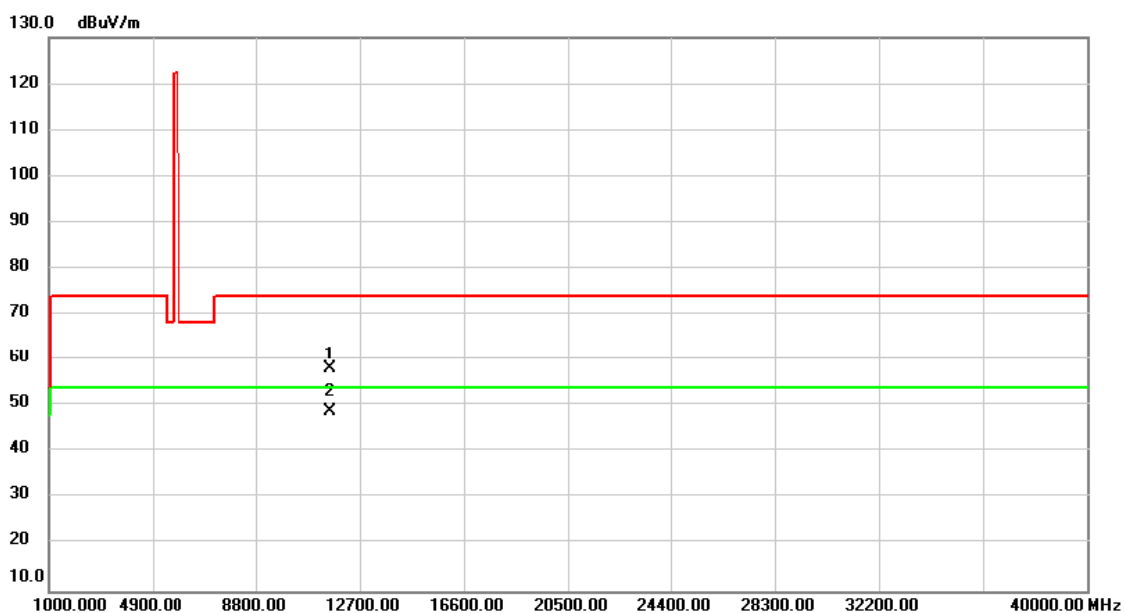

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	53.21	4.87	58.08	74.00	-15.92	peak	
2	*	11570.00	43.83	4.87	48.70	54.00	-5.30	AVG	

Test Mode	UNII-3/ TX N (HT20) Mode 5785MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

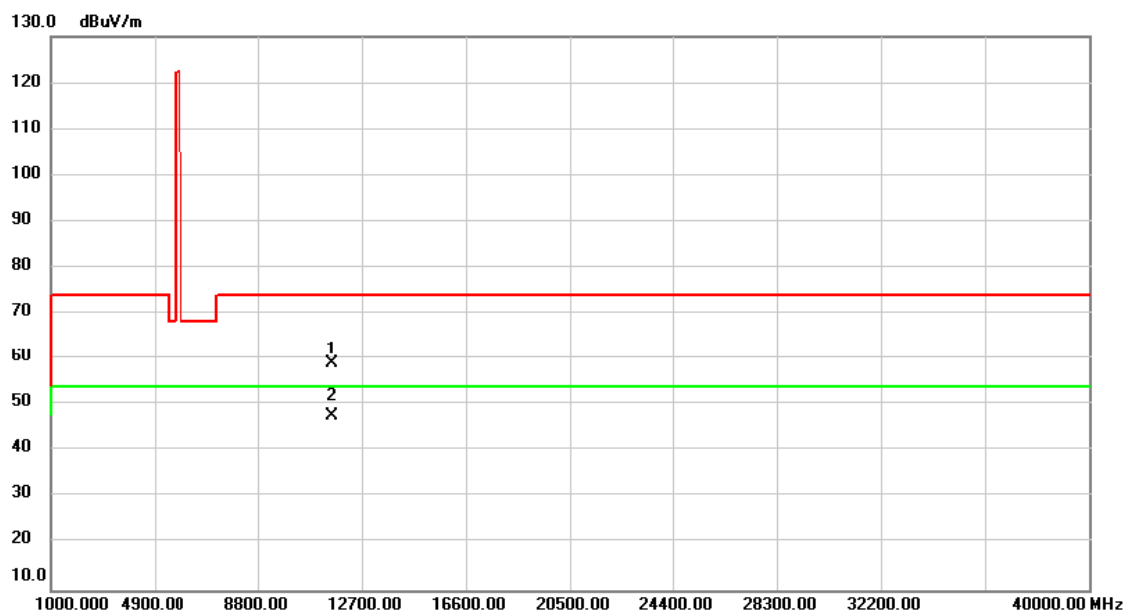

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	54.04	4.87	58.91	74.00	-15.09	peak	
2	*	11570.00	42.82	4.87	47.69	54.00	-6.31	AVG	

Test Mode	UNII-3/ TX N (HT20)Mode 5825MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------


Orthogonal Axis: X

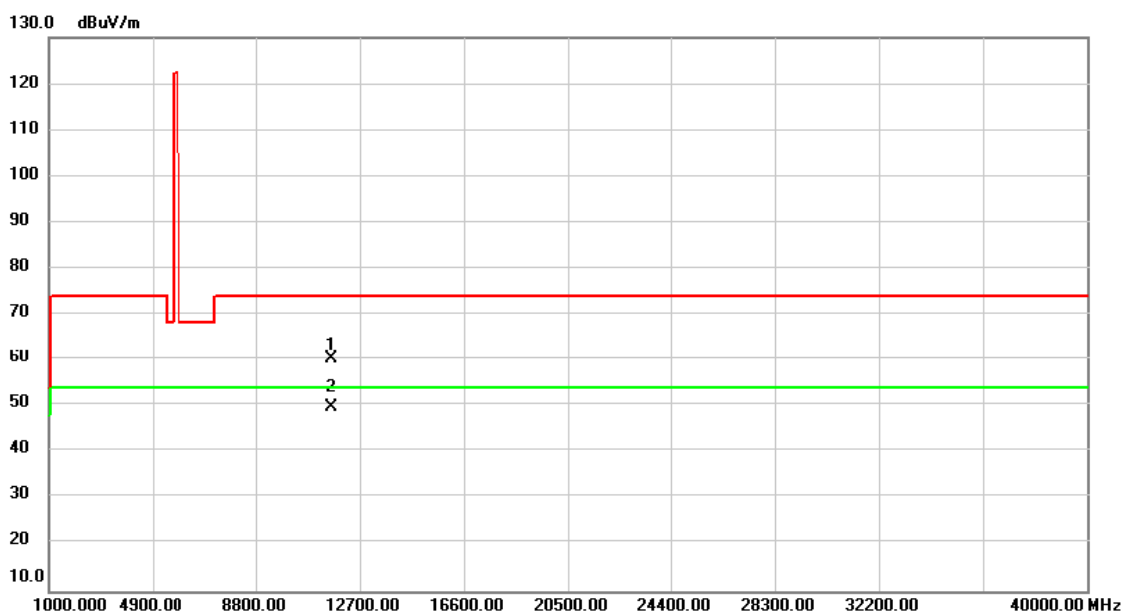

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	55.53	4.69	60.22	74.00	-13.78	peak	
2	*	11650.00	44.93	4.69	49.62	54.00	-4.38	AVG	

Test Mode	UNII-3/ TX N (HT20)Mode 5825MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

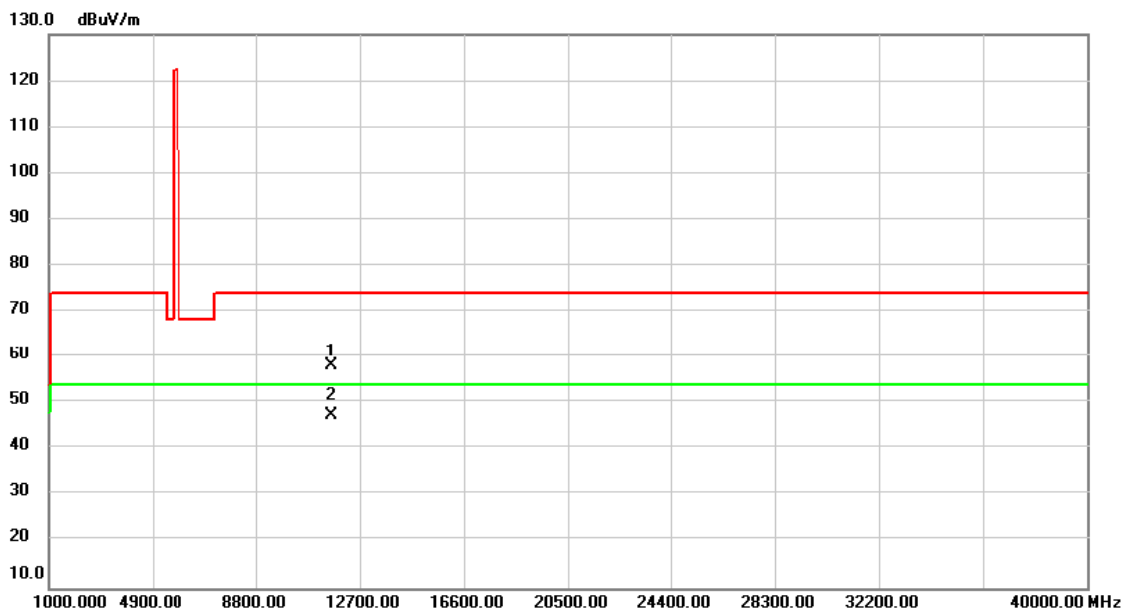

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	53.50	4.69	58.19	74.00	-15.81	peak	
2	*	11650.00	42.77	4.69	47.46	54.00	-6.54	AVG	

Test Mode	UNII-1/TX AC (VHT80) Mode 5210MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------


Orthogonal Axis: X

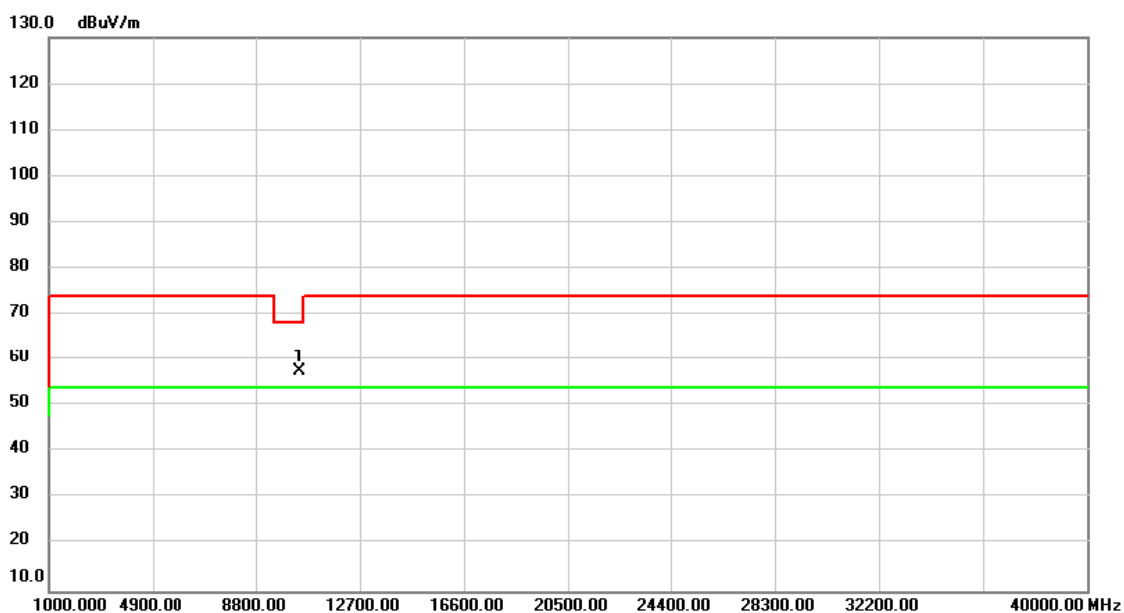

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10420.00	52.67	4.99	57.66	68.20	-10.54	peak	

Test Mode	UNII-1/TX AC (VHT80) Mode 5210MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

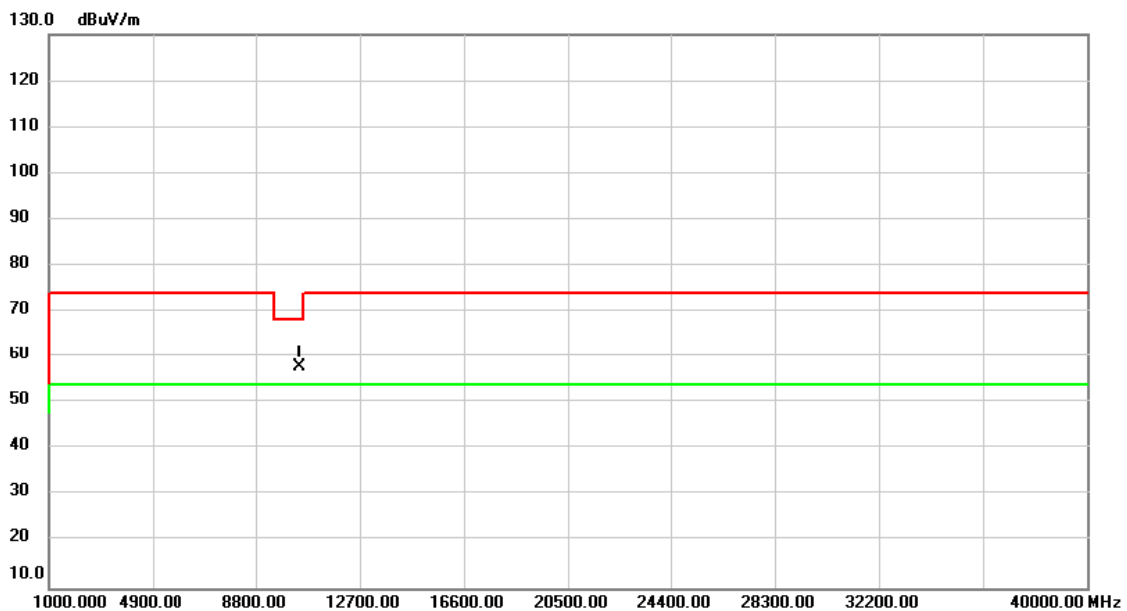

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	52.99	4.99	57.98	68.20	-10.22	peak	

Test Mode	UNII-2A/TX AC (VHT80) Mode 5290MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------


Orthogonal Axis: X

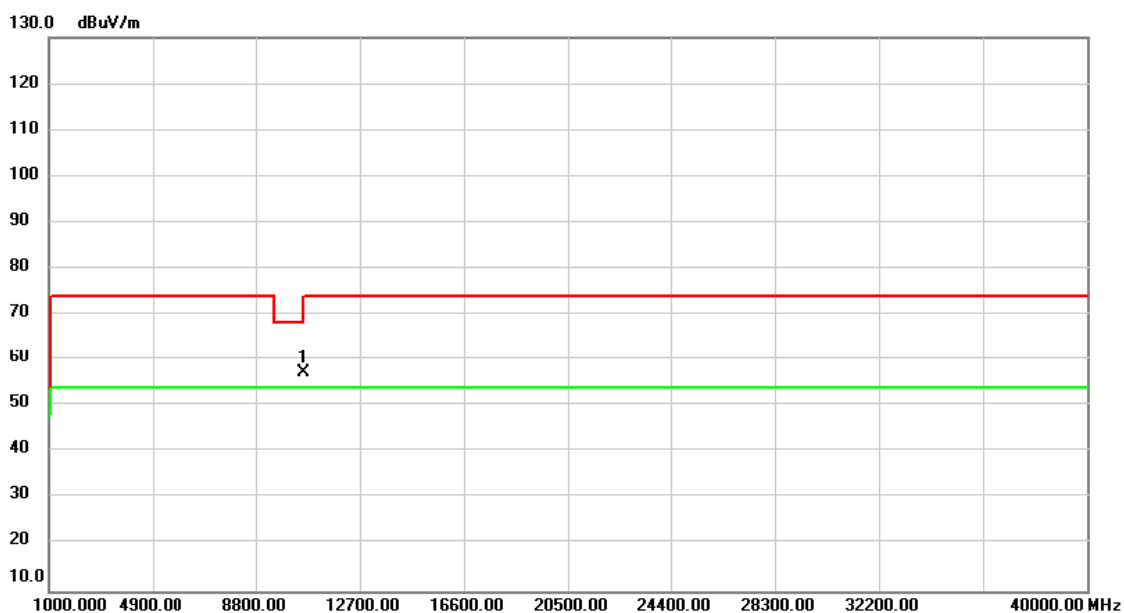

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	51.89	5.37	57.26	68.20	-10.94	peak	

Test Mode	UNII-2A/TX AC (VHT80) Mode 5290MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		

Orthogonal Axis: X

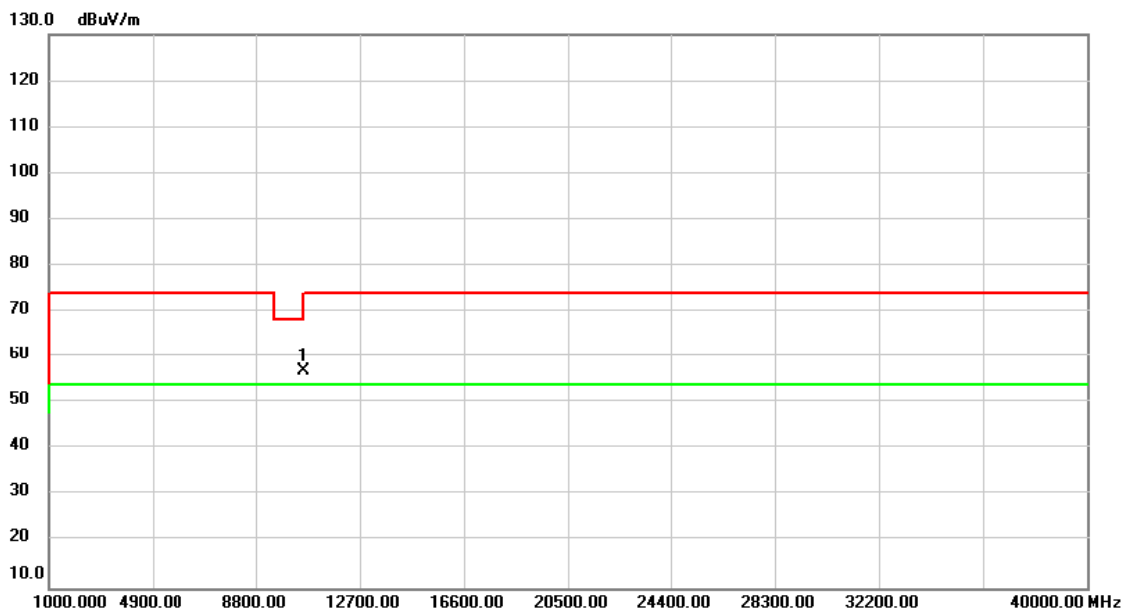

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	51.46	5.37	56.83	68.20	-11.37	peak	

Test Mode	UNII-2C/TX AC (VHT80) Mode 530MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------


Orthogonal Axis: X



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	52.68	6.09	58.77	74.00	-15.23	peak	
2	*	11060.00	43.64	6.09	49.73	54.00	-4.27	AVG	

Test Mode	UNII-2C/TX AC (VHT80) Mode 530MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

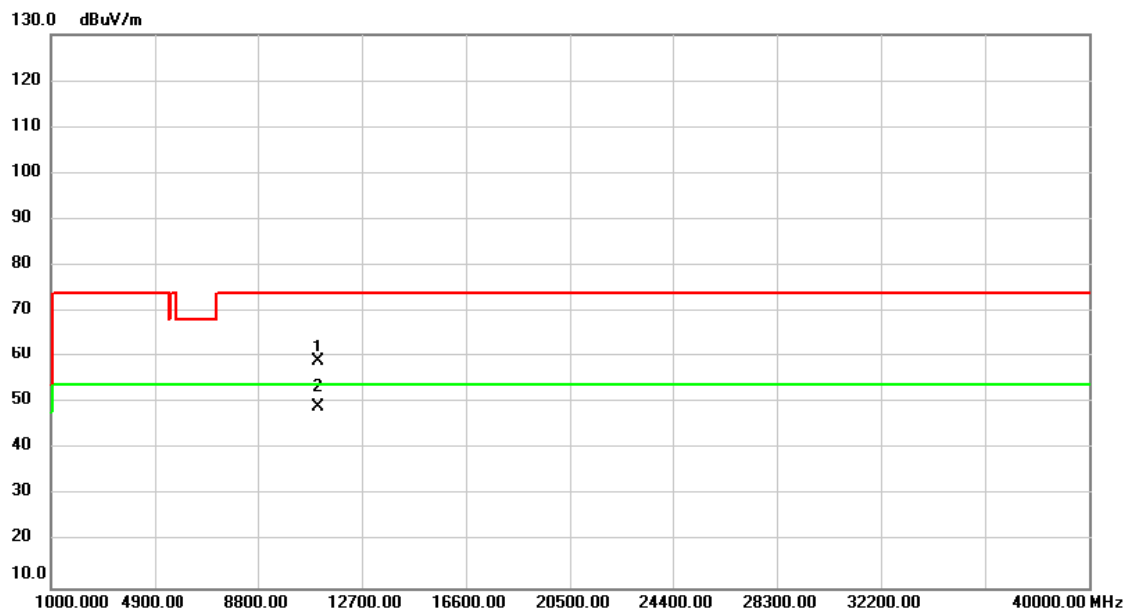

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	53.04	6.09	59.13	74.00	-14.87	peak	
2	*	11060.00	43.21	6.09	49.30	54.00	-4.70	AVG	

Test Mode	UNII-2C/TX AC (VHT80) Mode 5610MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------


Orthogonal Axis: X

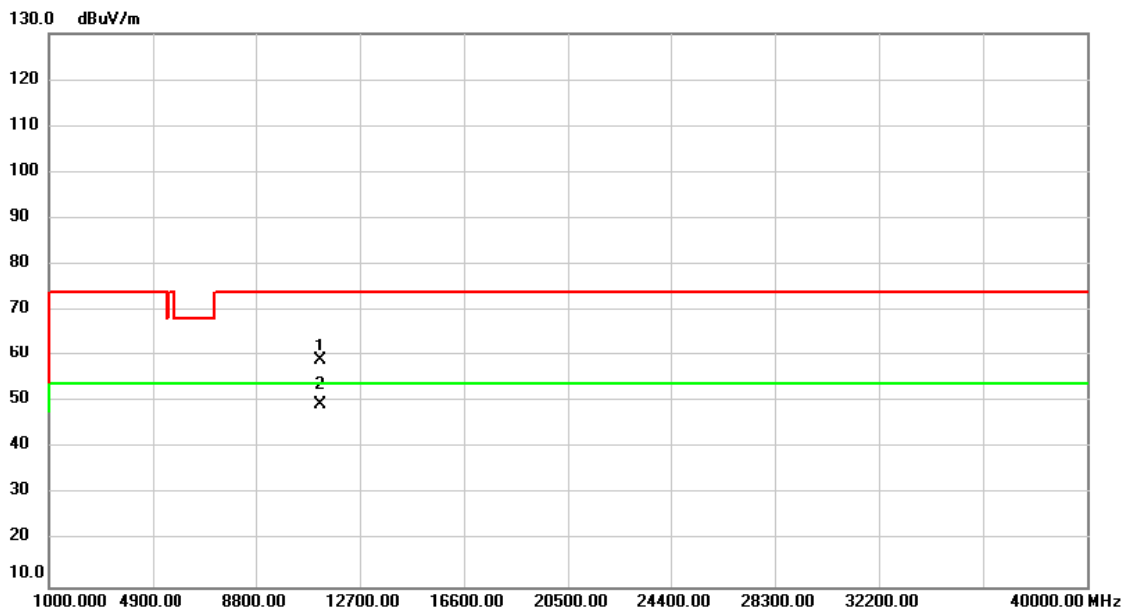

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	53.45	5.71	59.16	74.00	-14.84	peak	
2	*	11220.00	43.87	5.71	49.58	54.00	-4.42	AVG	

Test Mode	UNII-2C/TX AC (VHT80) Mode 5610MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		


Orthogonal Axis: X

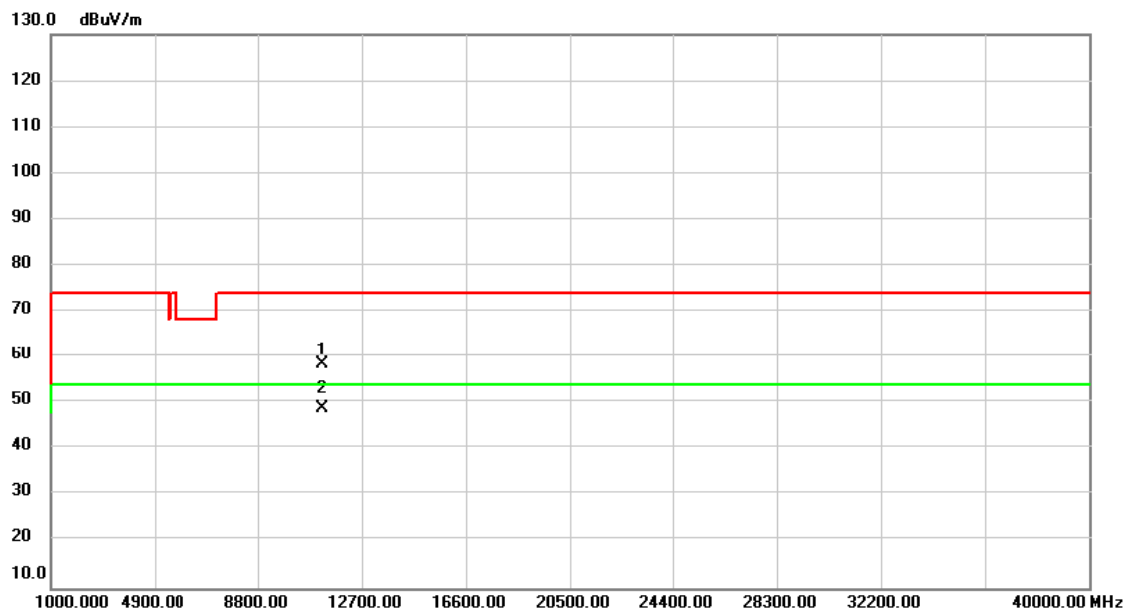

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	52.64	5.71	58.35	74.00	-15.65	peak	
2	*	11220.00	43.24	5.71	48.95	54.00	-5.05	AVG	

Test Mode	UNII-3/TX AC (VHT80) Mode 5775MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------


Orthogonal Axis: X

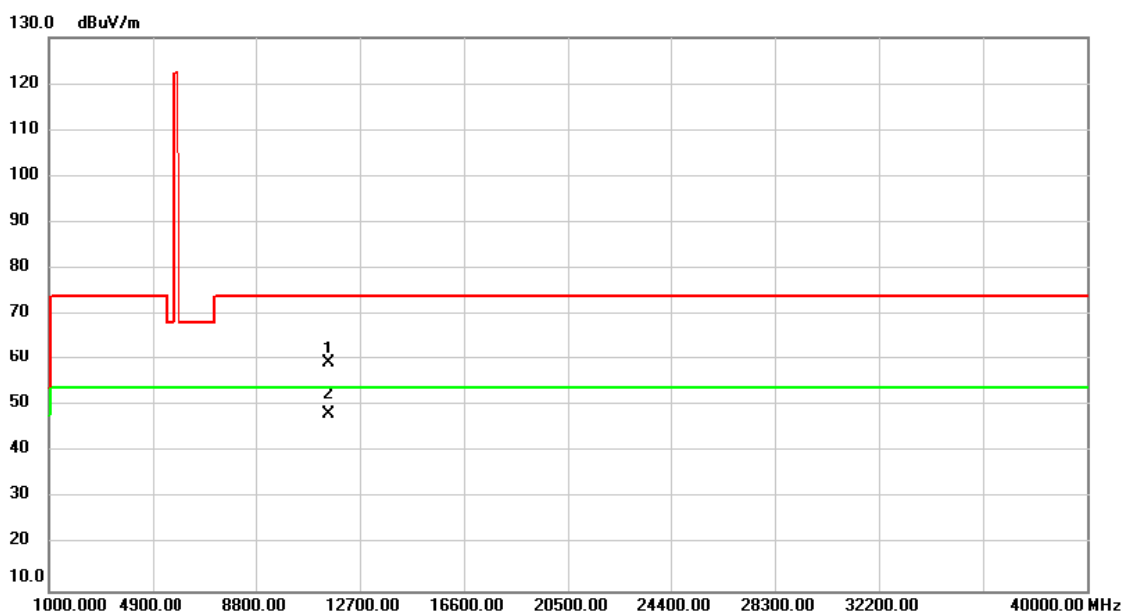

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	54.30	4.92	59.22	74.00	-14.78	peak	
2	*	11550.00	43.47	4.92	48.39	54.00	-5.61	AVG	

Test Mode	UNII-3/TX AC (VHT80) Mode 5775MHz	Polarization	Horizontal
Test Voltage	AC 120V/60Hz		

Orthogonal Axis: X

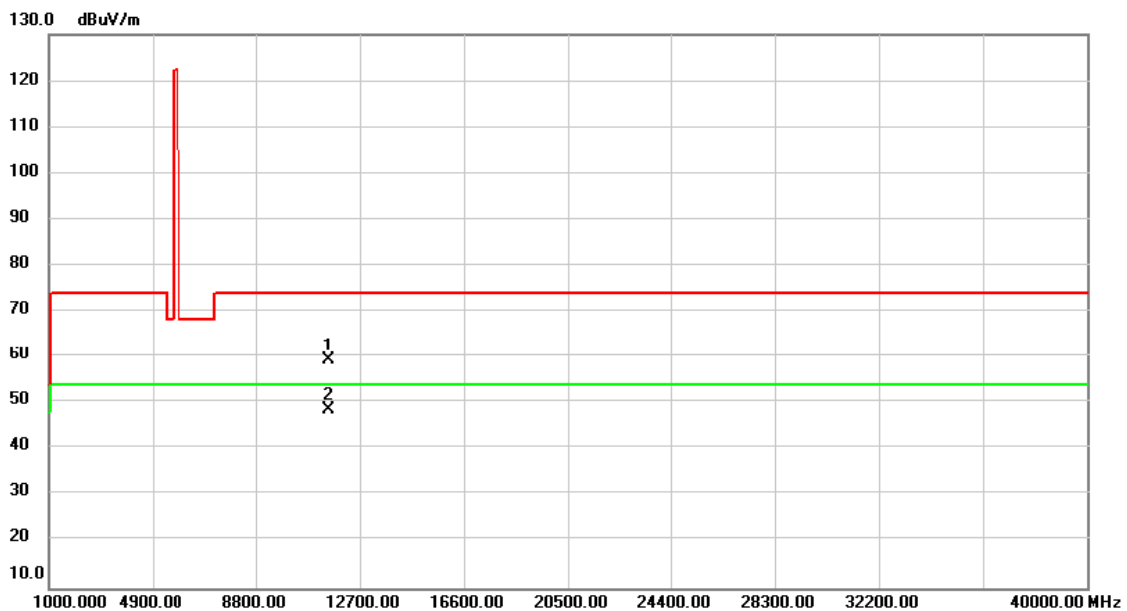

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11550.00	54.53	4.92	59.45	74.00	-14.55	peak	
2		11550.00	43.58	4.92	48.50	74.00	-25.50	peak	

APPENDIX E - BANDWIDTH


Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.01	17.30
CH40	5200	26.25	17.70
CH48	5240	22.09	17.30



Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.20	18.40
CH40	5200	22.79	18.60
CH48	5240	22.25	18.40

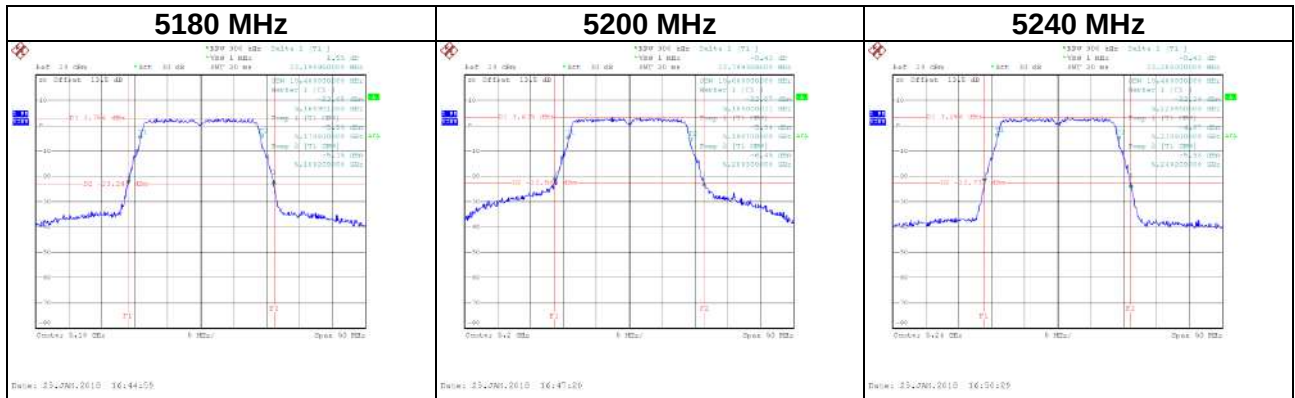


Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.05	17.30
CH60	5300	22.05	17.30
CH64	5320	21.99	17.30




Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.29	18.40
CH60	5300	22.45	18.40
CH64	5320	22.35	18.40

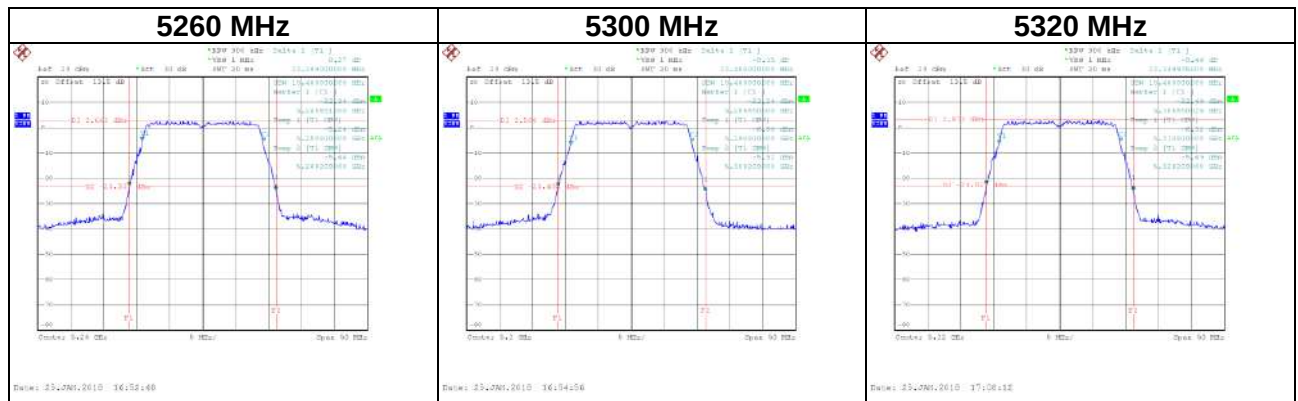


Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.89	17.30
CH116	5580	21.99	17.30
CH140	5700	21.99	17.30

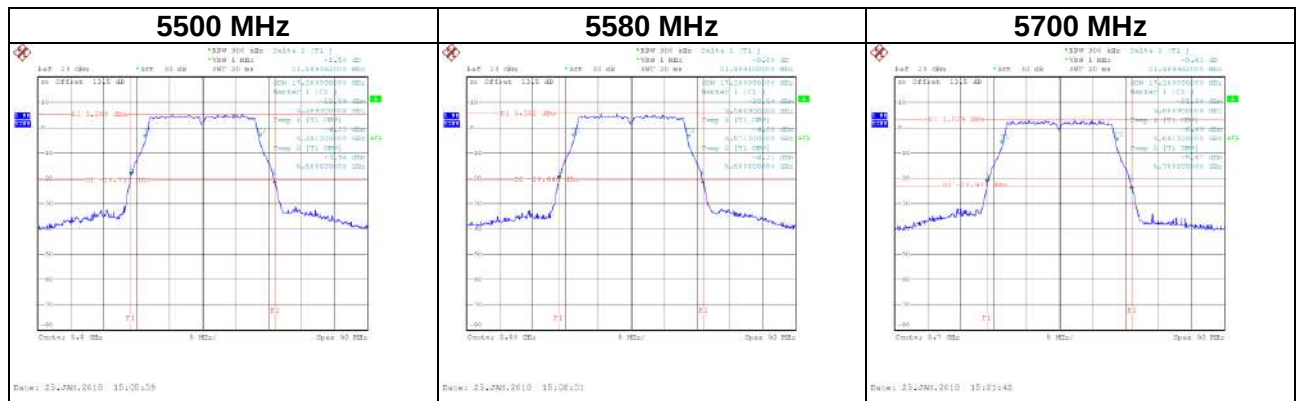


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.09	18.40
CH116	5580	22.01	18.30
CH140	5700	22.15	18.50

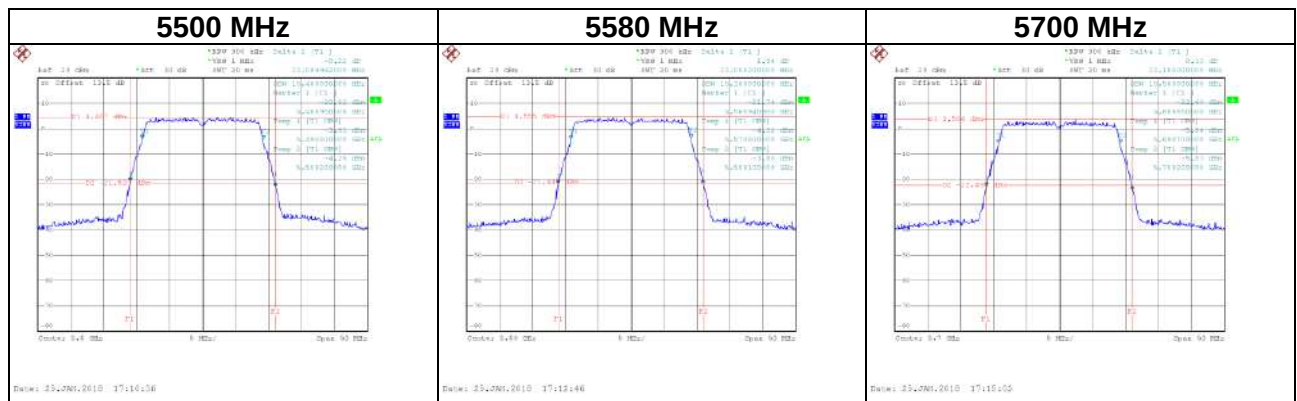


Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165_ANT 1

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.50	16.50	>=500
CH157	5785	16.39	16.60	>=500
CH165	5825	16.45	16.60	>=500

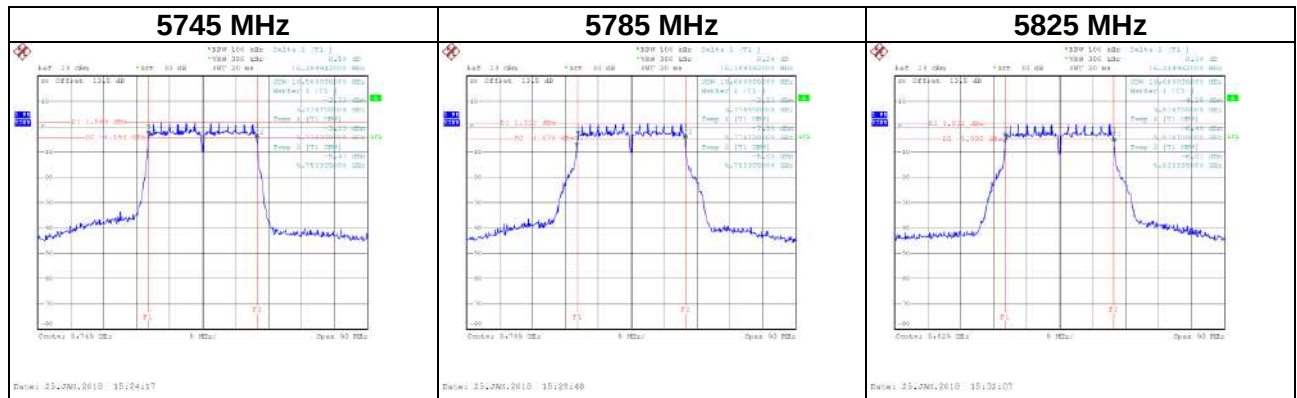


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.14	17.40	>=500
CH157	5785	17.55	17.80	>=500
CH165	5825	17.70	17.80	>=500

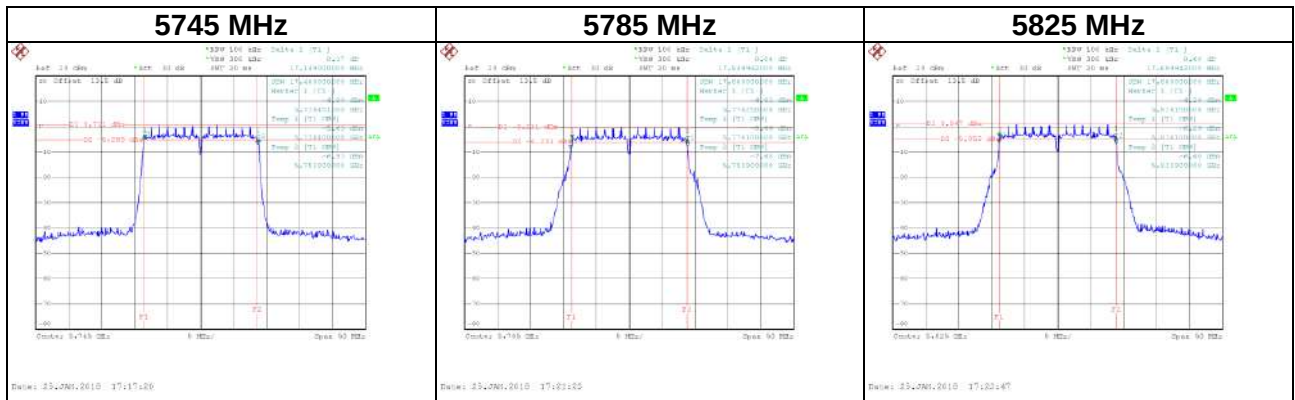

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 1

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	83.00	76.40

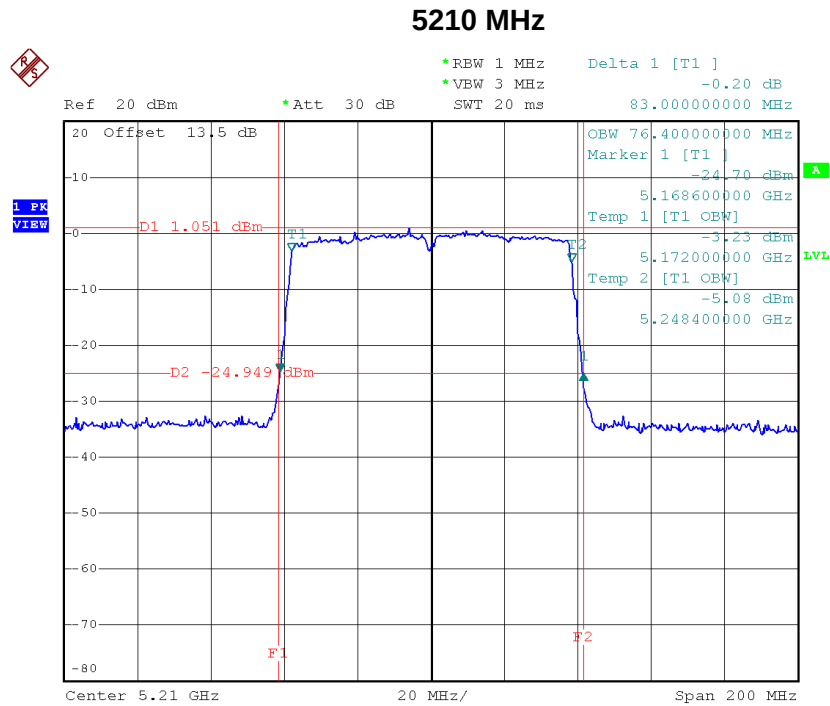


Date: 25.JAN.2018 19:07:25

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 1

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	83.00	76.40


5290 MHz

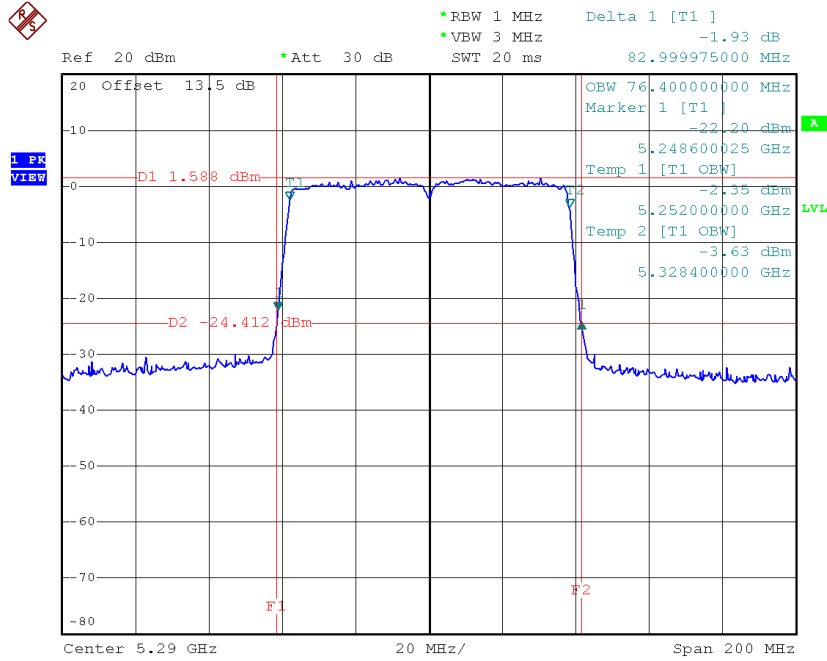


Date: 25.JAN.2018 19:10:25

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 1

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	82.81	76.00
CH122	5610	83.20	76.00

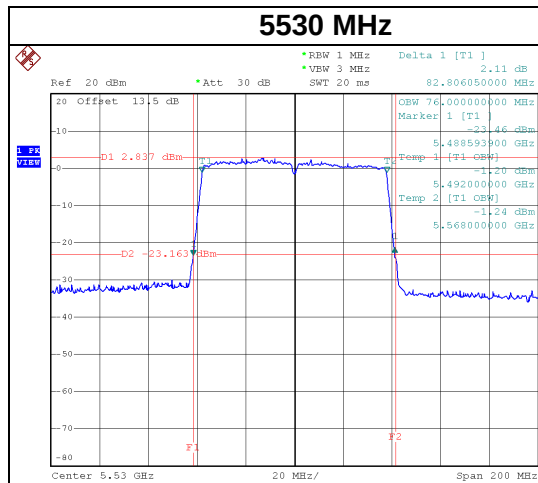

Date: 25.JAN.2018 19:13:24

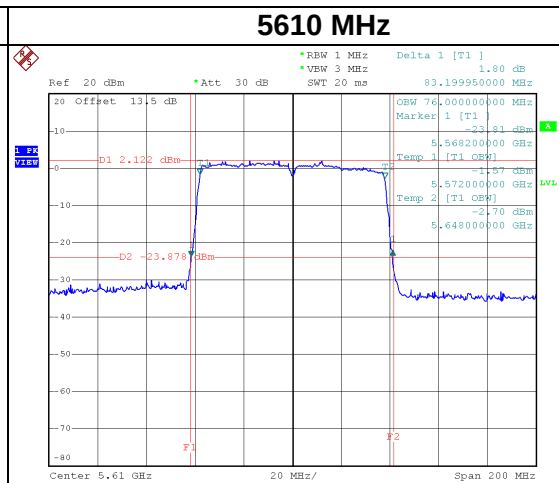


Date: 25.JAN.2018 19:16:05

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.60	76.00	>=500

5775 MHz

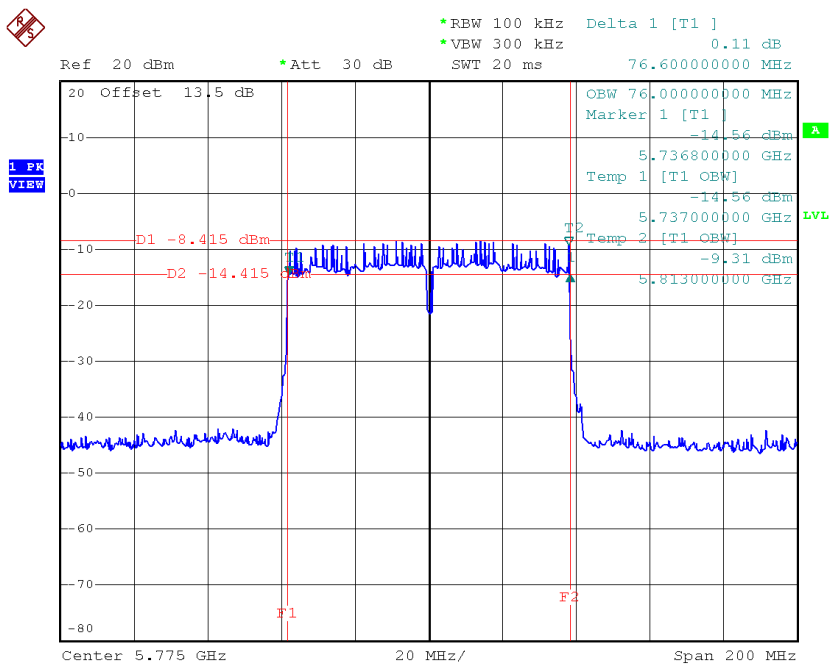

Date: 25.JAN.2018 19:19:16

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.69	24.00	0.25
CH40	5200	12.71	24.00	0.25
CH48	5240	12.96	24.00	0.25

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.92	24.00	0.25
CH40	5200	10.87	24.00	0.25
CH48	5240	11.61	24.00	0.25

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.90	24.00	0.25
CH40	5200	14.90	24.00	0.25
CH48	5240	15.35	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.67	24.00	0.25
CH40	5200	11.94	24.00	0.25
CH48	5240	11.91	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	9.90	24.00	0.25
CH40	5200	10.14	24.00	0.25
CH48	5240	10.71	24.00	0.25

Test Mode: UNII-1/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.88	24.00	0.25
CH40	5200	14.14	24.00	0.25
CH48	5240	14.36	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.37	24.00	0.25
CH60	5300	12.58	24.00	0.25
CH64	5320	12.48	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.29	24.00	0.25
CH60	5300	11.50	24.00	0.25
CH64	5320	11.60	24.00	0.25

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.87	24.00	0.25
CH60	5300	15.08	24.00	0.25
CH64	5320	15.07	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.23	24.00	0.25
CH60	5300	11.37	24.00	0.25
CH64	5320	11.51	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.49	24.00	0.25
CH60	5300	10.81	24.00	0.25
CH64	5320	10.89	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	13.89	24.00	0.25
CH60	5300	14.11	24.00	0.25
CH64	5320	14.22	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.79	24.00	0.25
CH116	5580	12.68	24.00	0.25
CH140	5700	12.13	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.91	24.00	0.25
CH116	5580	11.57	24.00	0.25
CH140	5700	10.02	24.00	0.25

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.38	24.00	0.25
CH116	5580	15.17	24.00	0.25
CH140	5700	14.21	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.91	24.00	0.25
CH116	5580	11.83	24.00	0.25
CH140	5700	11.93	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.05	24.00	0.25
CH116	5580	10.60	24.00	0.25
CH140	5700	9.84	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.51	24.00	0.25
CH116	5580	14.27	24.00	0.25
CH140	5700	14.02	24.00	0.25

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	12.98	30.00	1.00
CH157	5785	12.51	30.00	1.00
CH165	5825	12.16	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.74	30.00	1.00
CH157	5785	10.33	30.00	1.00
CH165	5825	9.97	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.01	30.00	1.00
CH157	5785	14.57	30.00	1.00
CH165	5825	14.21	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.63	30.00	1.00
CH157	5785	11.35	30.00	1.00
CH165	5825	11.95	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.46	30.00	1.00
CH157	5785	9.34	30.00	1.00
CH165	5825	9.86	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.69	30.00	1.00
CH157	5785	13.47	30.00	1.00
CH165	5825	14.04	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.46	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	8.51	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	12.02	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.96	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.48	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	12.74	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.93	24.00	0.25
CH122	5610	9.69	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	8.82	24.00	0.25
CH122	5610	8.49	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.42	24.00	0.25
CH122	5610	12.14	24.00	0.25

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	9.28	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	7.61	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.54	30.00	1.00

Spot check test:

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.60	24.00	0.25
CH40	5200	11.45	24.00	0.25
CH48	5240	11.86	24.00	0.25

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.20	24.00	0.25
CH40	5200	11.03	24.00	0.25
CH48	5240	11.56	24.00	0.25

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.41	24.00	0.25
CH40	5200	14.26	24.00	0.25
CH48	5240	14.72	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.01	24.00	0.25
CH40	5200	10.65	24.00	0.25
CH48	5240	11.03	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.39	24.00	0.25
CH40	5200	10.17	24.00	0.25
CH48	5240	10.61	24.00	0.25

Test Mode: UNII-1/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.72	24.00	0.25
CH40	5200	13.43	24.00	0.25
CH48	5240	13.84	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.24	24.00	0.25
CH60	5300	9.15	24.00	0.25
CH64	5320	8.78	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.40	24.00	0.25
CH60	5300	9.02	24.00	0.25
CH64	5320	7.71	24.00	0.25

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.85	24.00	0.25
CH60	5300	12.10	24.00	0.25
CH64	5320	11.29	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.98	24.00	0.25
CH60	5300	9.21	24.00	0.25
CH64	5320	9.53	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.88	24.00	0.25
CH60	5300	8.81	24.00	0.25
CH64	5320	8.86	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.94	24.00	0.25
CH60	5300	12.02	24.00	0.25
CH64	5320	12.22	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	8.78	24.00	0.25
CH116	5580	7.61	24.00	0.25
CH140	5700	8.96	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	7.73	24.00	0.25
CH116	5580	7.27	24.00	0.25
CH140	5700	8.37	24.00	0.25

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.30	24.00	0.25
CH116	5580	10.45	24.00	0.25
CH140	5700	11.69	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.87	24.00	0.25
CH116	5580	8.36	24.00	0.25
CH140	5700	9.88	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	6.55	24.00	0.25
CH116	5580	8.31	24.00	0.25
CH140	5700	9.23	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.72	24.00	0.25
CH116	5580	11.35	24.00	0.25
CH140	5700	12.58	24.00	0.25

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.61	30.00	1.00
CH157	5785	11.17	30.00	1.00
CH165	5825	11.05	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	11.51	30.00	1.00
CH157	5785	11.07	30.00	1.00
CH165	5825	10.95	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.57	30.00	1.00
CH157	5785	14.13	30.00	1.00
CH165	5825	14.01	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.60	30.00	1.00
CH157	5785	10.33	30.00	1.00
CH165	5825	10.81	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.34	30.00	1.00
CH157	5785	10.00	30.00	1.00
CH165	5825	10.63	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.48	30.00	1.00
CH157	5785	13.18	30.00	1.00
CH165	5825	13.73	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.13	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	8.14	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	11.67	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.32	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	8.47	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	11.93	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.36	24.00	0.25
CH122	5610	9.16	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.25	24.00	0.25
CH122	5610	8.86	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.32	24.00	0.25
CH122	5610	12.02	24.00	0.25

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	8.63	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	8.25	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.45	30.00	1.00

APPENDIX G - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	0.04	0.36	0.40	17.00
CH40	5200	0.74	0.36	1.10	17.00
CH48	5240	0.44	0.36	0.80	17.00

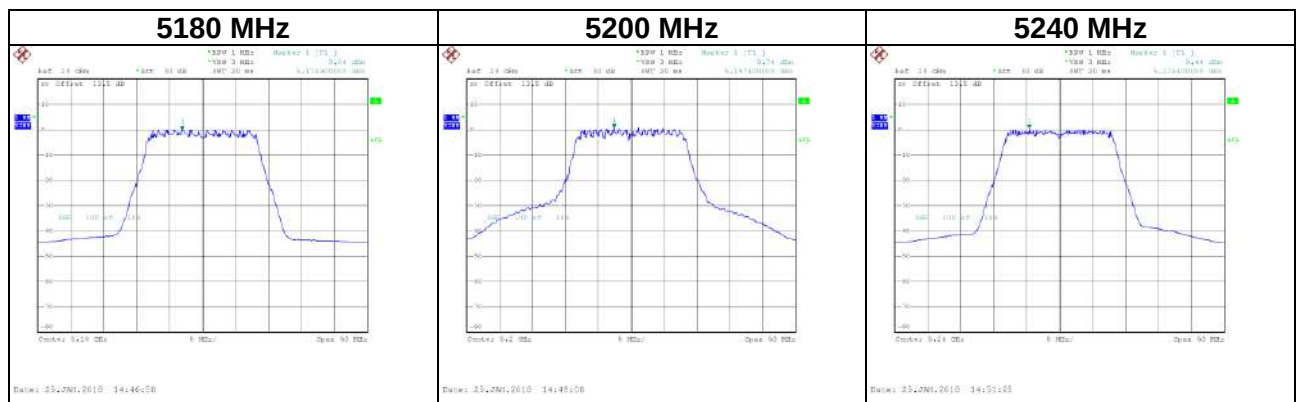

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-2.34	0.36	-1.98	17.00
CH40	5200	-1.45	0.36	-1.09	17.00
CH48	5240	-0.73	0.36	-0.37	17.00

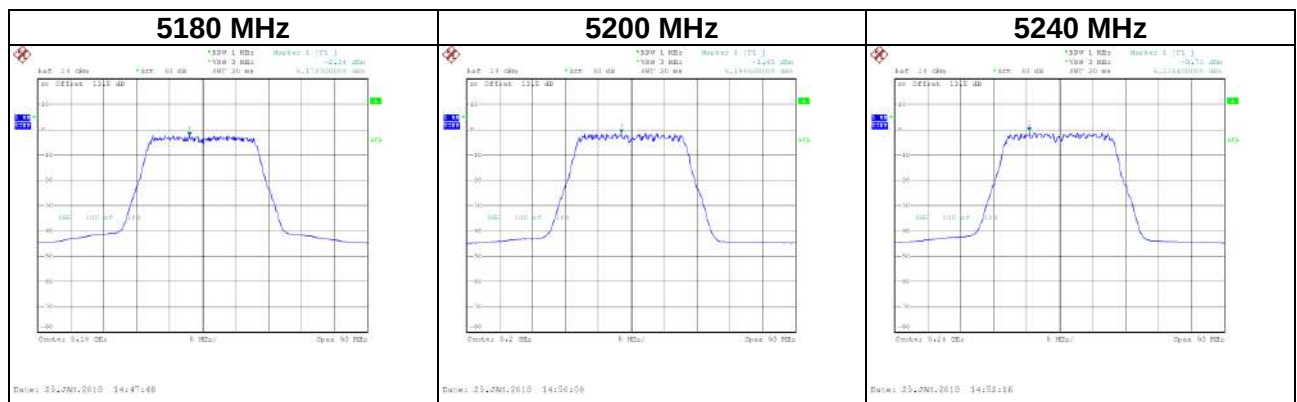


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	2.02	17.00
CH40	5200	2.79	17.00
CH48	5240	2.90	17.00


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-1.59	0.36	-1.23	17.00
CH40	5200	-1.03	0.36	-0.67	17.00
CH48	5240	-0.83	0.36	-0.47	17.00

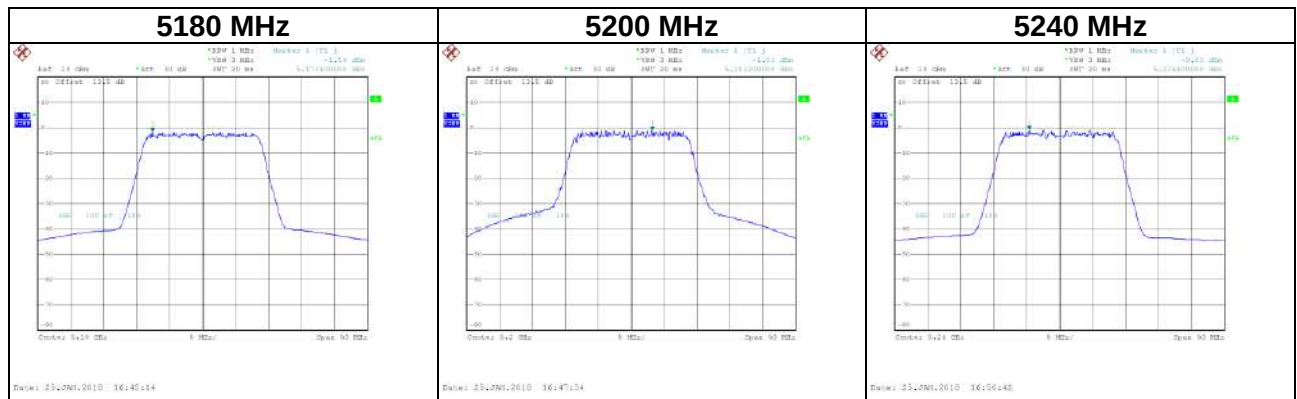

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-3.73	0.36	-3.37	17.00
CH40	5200	-3.08	0.36	-2.72	17.00
CH48	5240	-2.28	0.36	-1.92	17.00

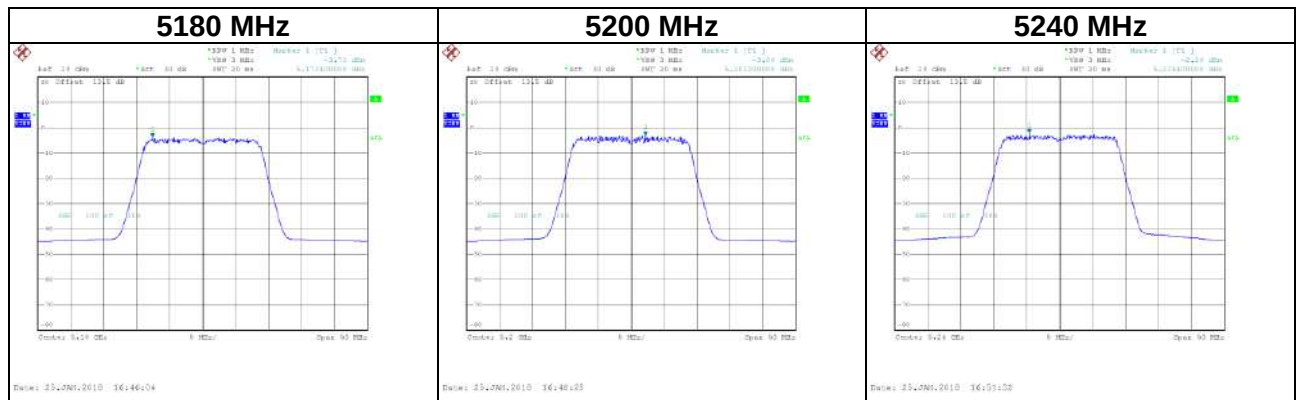


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	0.48	17.00
CH40	5200	1.08	17.00
CH48	5240	1.52	17.00


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	0.12	0.36	0.48	11.00
CH60	5300	0.22	0.36	0.58	11.00
CH64	5320	-0.22	0.36	0.14	11.00

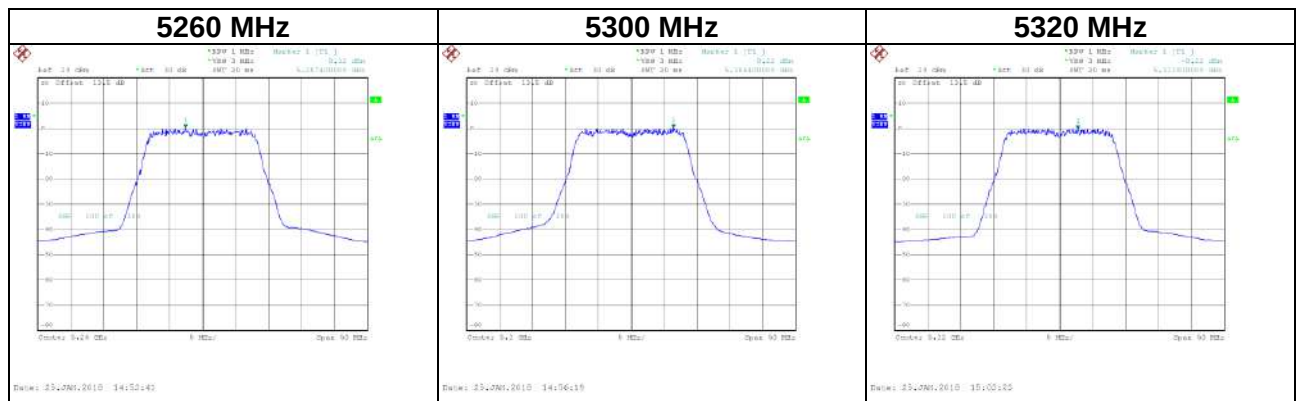

Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.01	0.36	-0.65	11.00
CH60	5300	-0.85	0.36	-0.49	11.00
CH64	5320	-1.10	0.36	-0.74	11.00

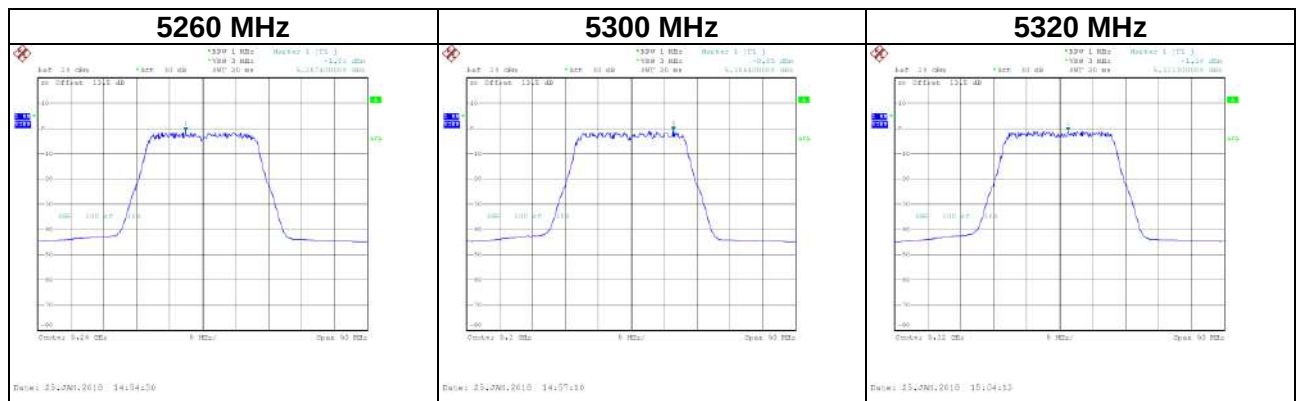


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	2.60	11.00
CH60	5300	2.73	11.00
CH64	5320	2.37	11.00


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.23	0.36	-0.87	11.00
CH60	5300	-1.33	0.36	-0.97	11.00
CH64	5320	-1.74	0.36	-1.38	11.00

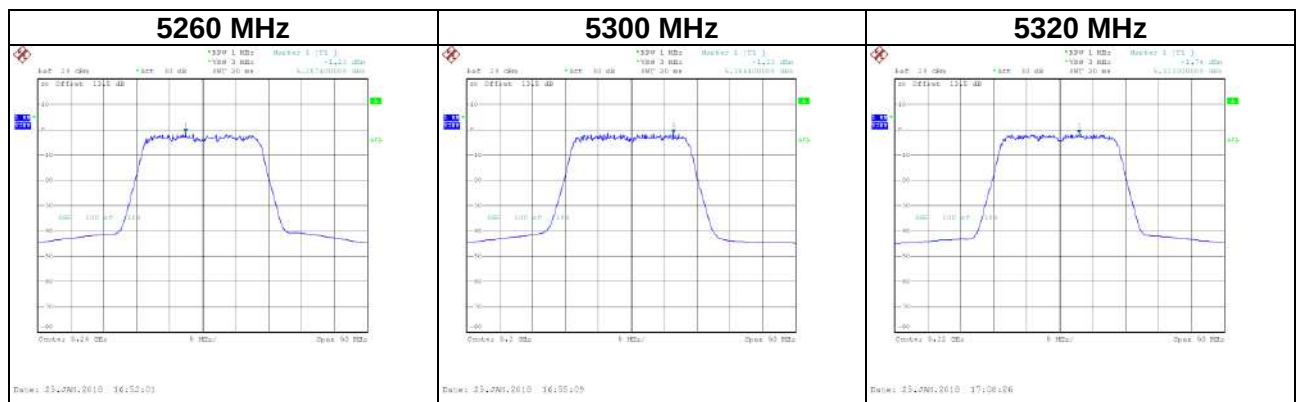

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-2.00	0.36	-1.64	11.00
CH60	5300	-2.33	0.36	-1.97	11.00
CH64	5320	-2.48	0.36	-2.12	11.00

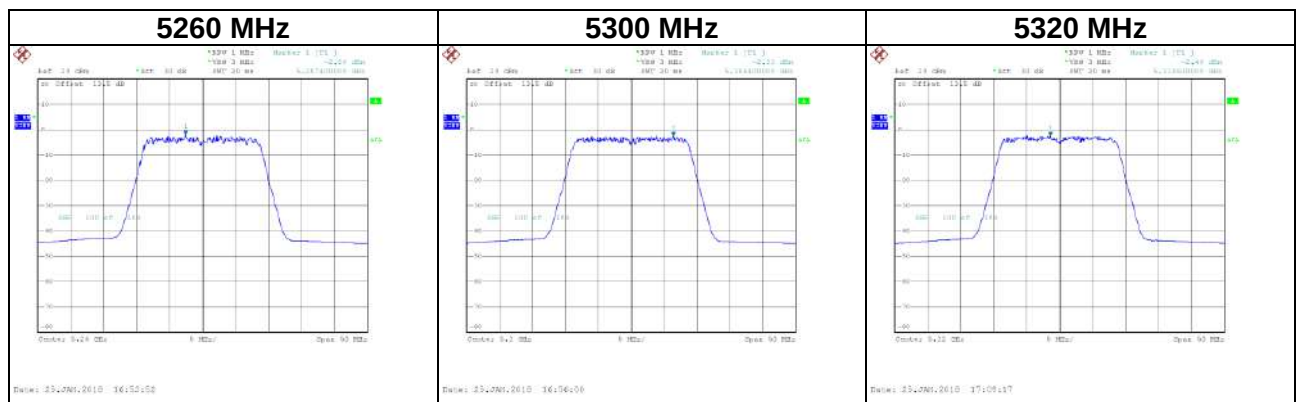


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	1.41	11.00
CH60	5300	1.21	11.00
CH64	5320	0.92	11.00


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	0.90	0.36	1.26	11.00
CH116	5580	1.42	0.36	1.78	11.00
CH140	5700	-0.66	0.36	-0.30	11.00

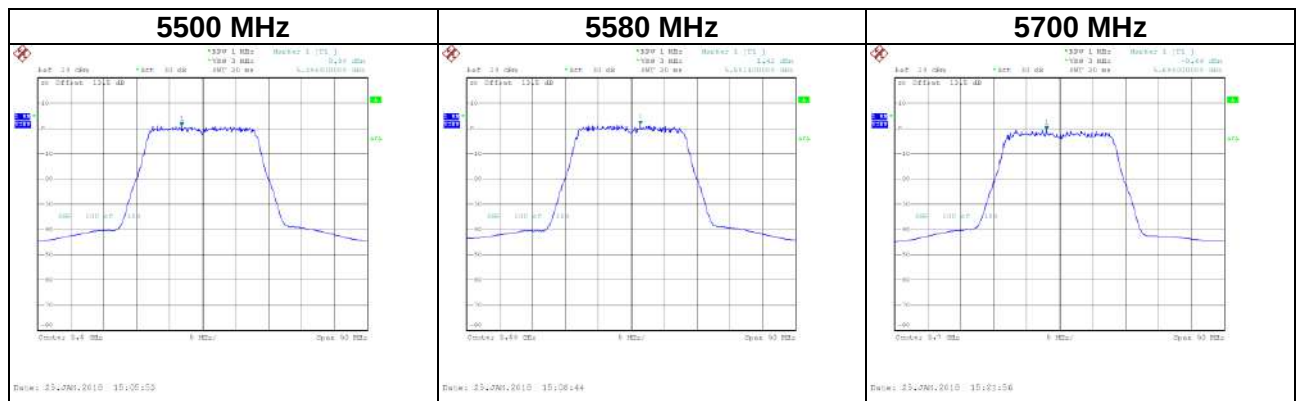

Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	1.23	0.36	1.59	11.00
CH116	5580	0.65	0.36	1.01	11.00
CH140	5700	-2.74	0.36	-2.38	11.00

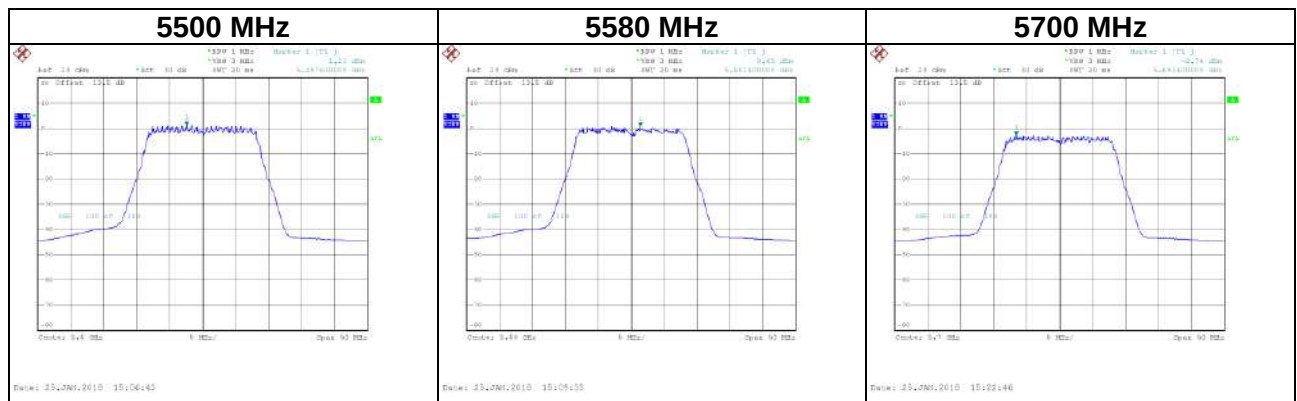


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	4.08	11.00
CH116	5580	4.06	11.00
CH140	5700	1.43	11.00


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.04	0.36	0.32	11.00
CH116	5580	0.58	0.36	0.94	11.00
CH140	5700	-1.33	0.36	-0.97	11.00

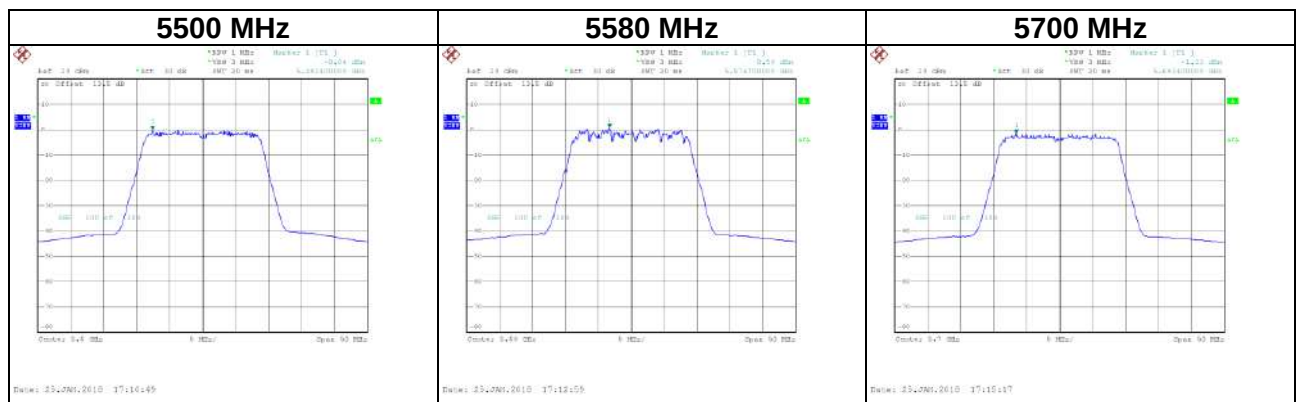

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.40	0.36	-0.04	11.00
CH116	5580	-0.34	0.36	0.02	11.00
CH140	5700	-2.91	0.36	-2.55	11.00

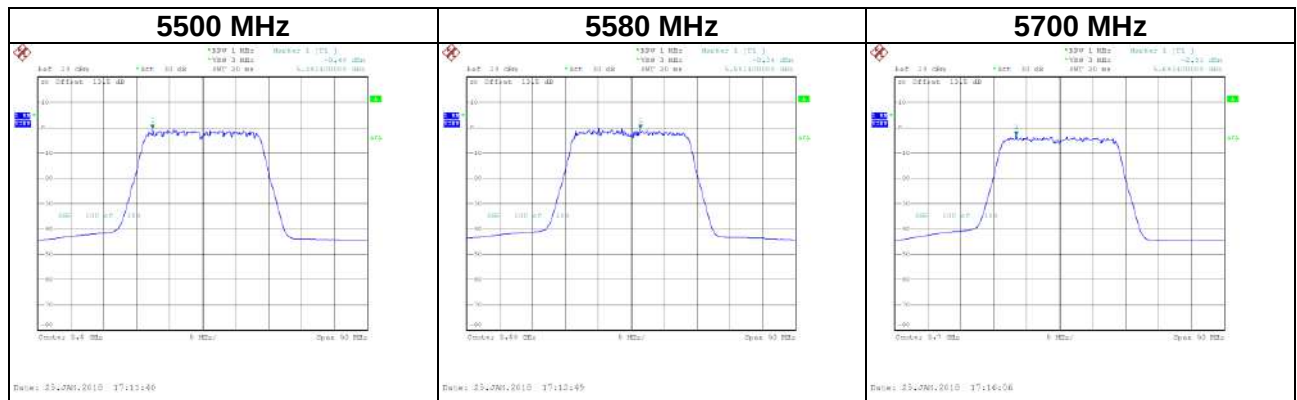


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	2.79	11.00
CH116	5580	3.15	11.00
CH140	5700	0.96	11.00


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-2.49	0.36	-2.13	30.00
CH157	5785	-2.36	0.36	-2.00	30.00
CH165	5825	-3.16	0.36	-2.80	30.00

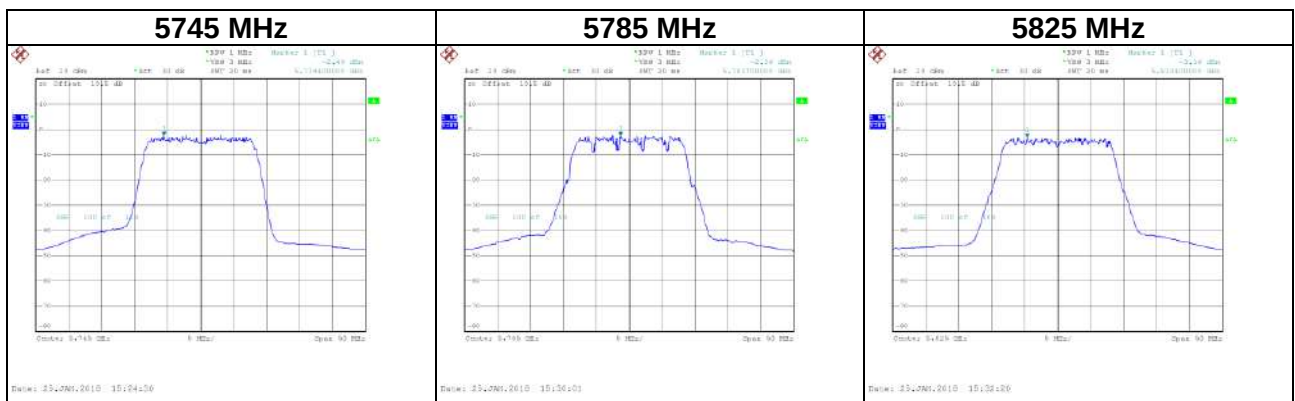

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-3.57	0.36	-3.21	30.00
CH157	5785	-3.64	0.36	-3.28	30.00
CH165	5825	-4.73	0.36	-4.37	30.00

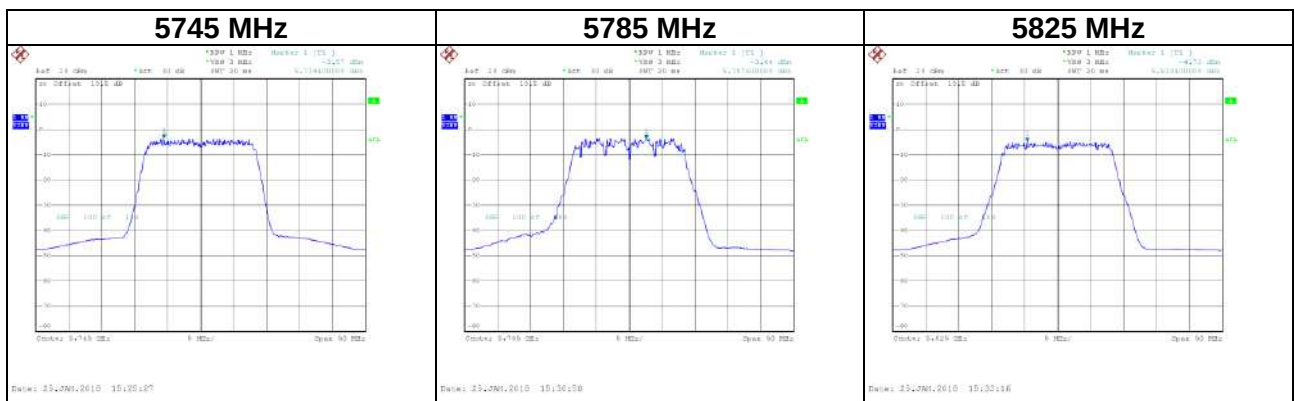


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	0.01	30.00
CH157	5785	0.06	30.00
CH165	5825	-0.86	30.00


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-3.97	0.36	-3.61	30.00
CH157	5785	-4.70	0.36	-4.34	30.00
CH165	5825	-3.61	0.36	-3.25	30.00

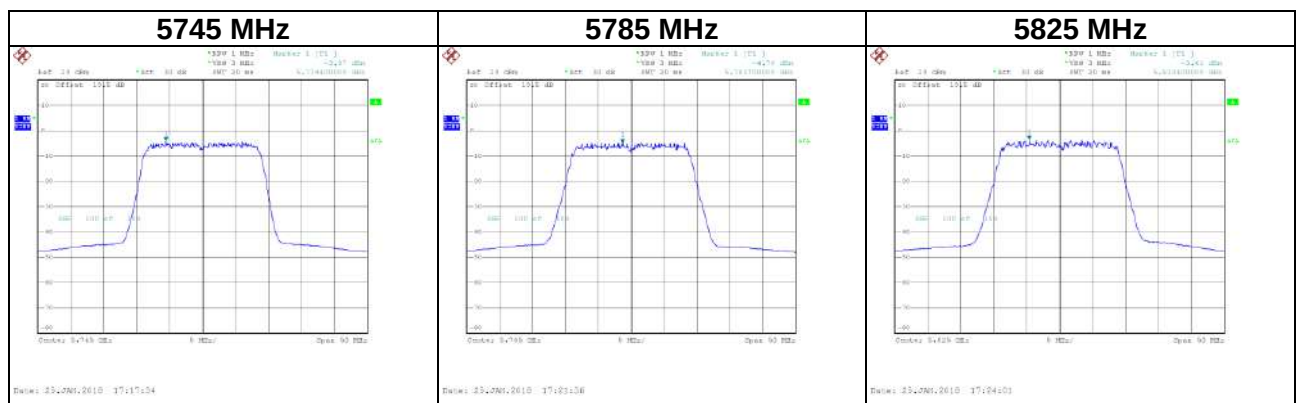

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-5.19	0.36	-4.83	30.00
CH157	5785	-5.65	0.36	-5.29	30.00
CH165	5825	-4.91	0.36	-4.55	30.00

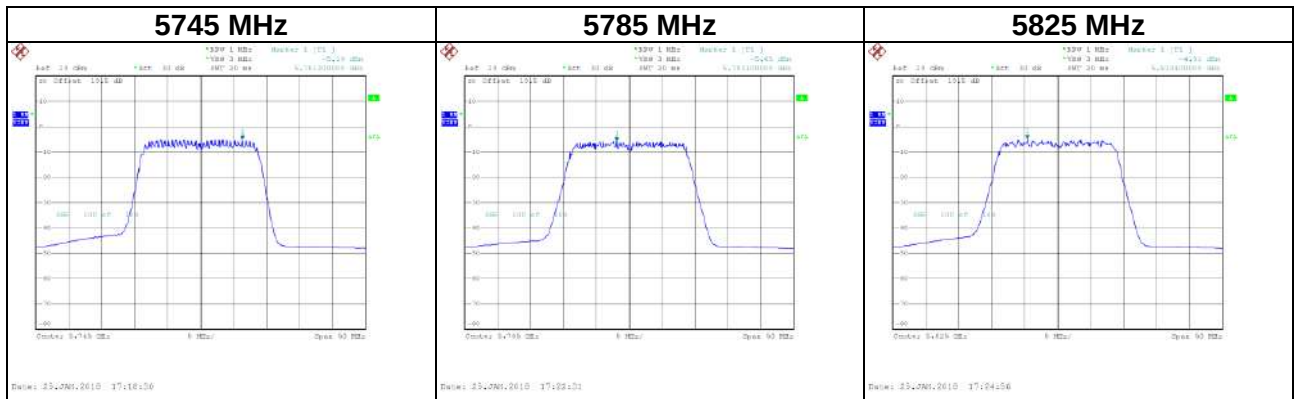


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-1.53	30.00
CH157	5785	-2.14	30.00
CH165	5825	-1.20	30.00

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-9.12	0.65	-8.47	17.00


5210 MHz

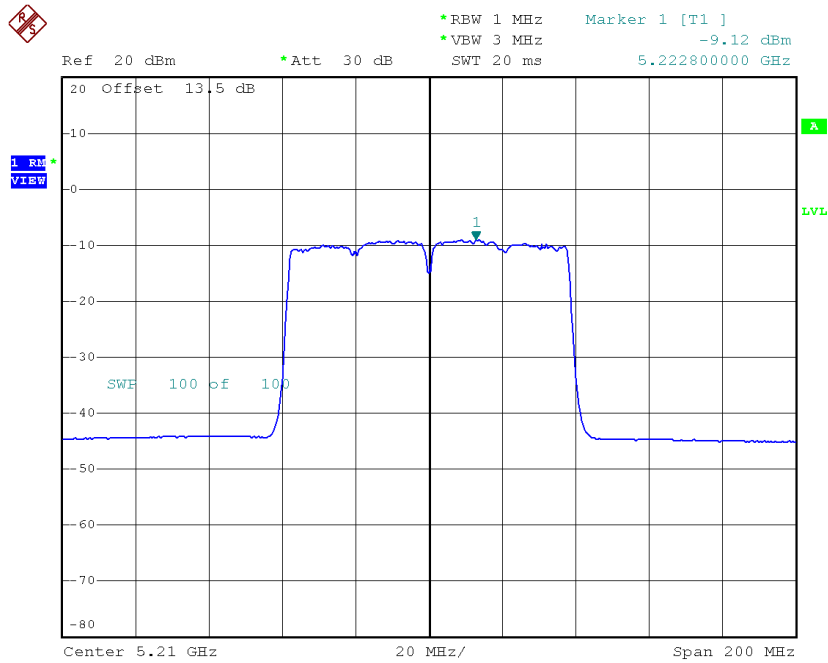

Date: 25.JAN.2018 19:07:41

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-10.03	0.65	-9.38	17.00

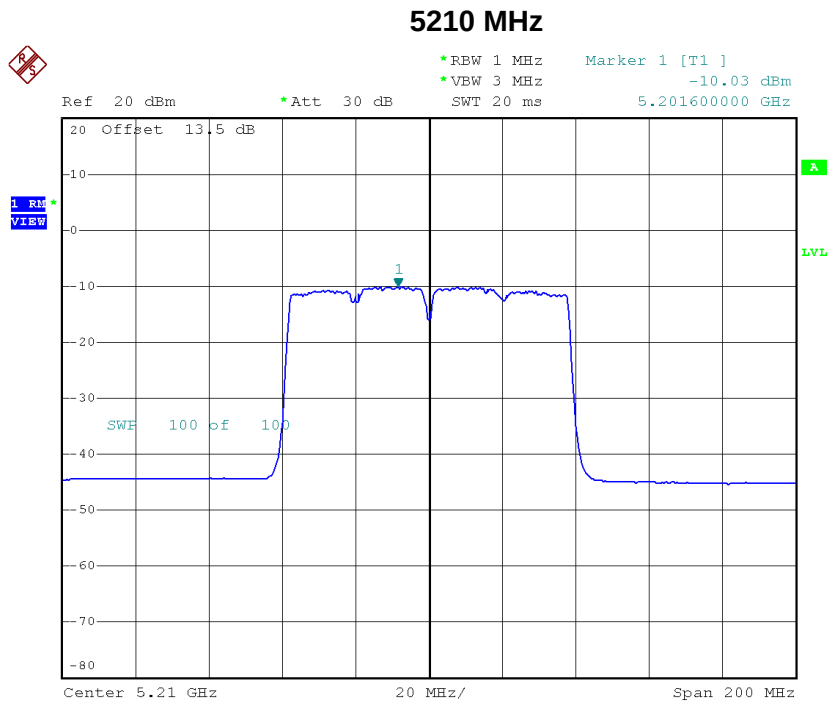


Date: 25.JAN.2018 19:08:45

Test Mode: UNII-1/TX AC80 Mode_CH42_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-6.54	17.00

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-8.10	0.65	-7.45	11.00

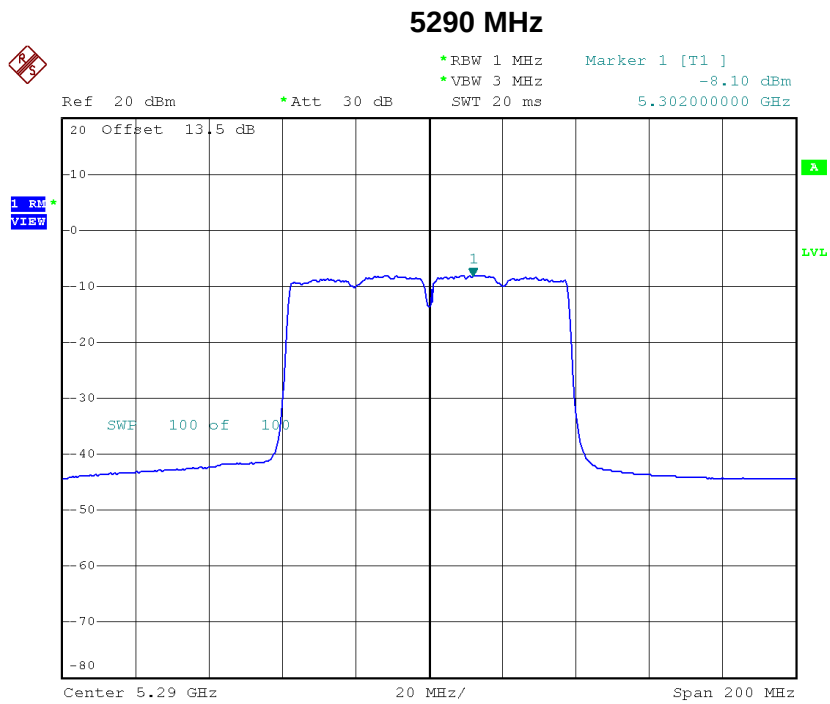

Date: 25.JAN.2018 19:10:41

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-8.72	0.65	-8.07	11.00

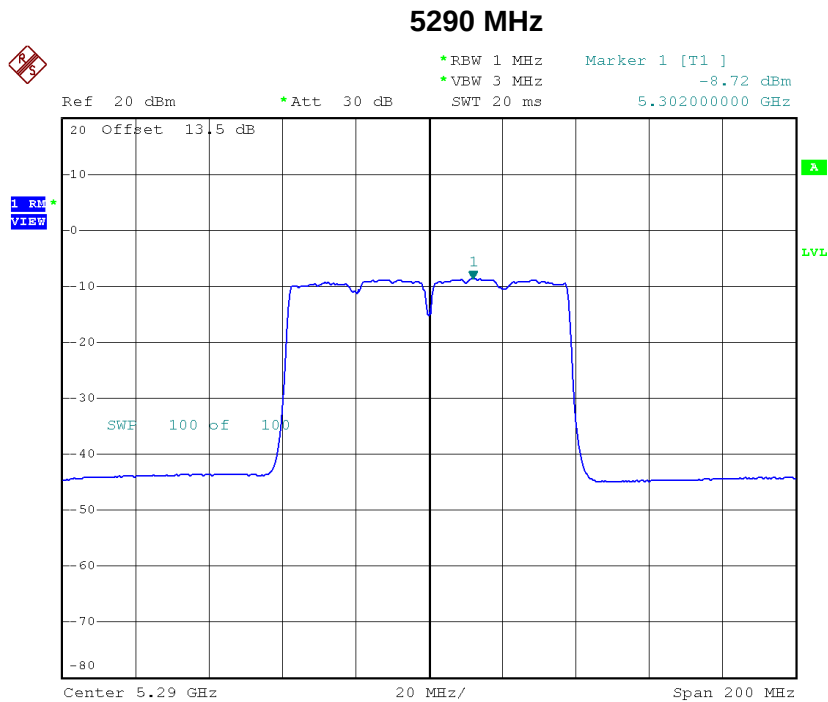


Date: 25.JAN.2018 19:11:48

Test Mode: UNII-2A/TX AC80 Mode_CH58_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-5.39	11.00


Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-6.98	0.65	-6.33	11.00
CH122	5610	-7.72	0.65	-7.07	11.00

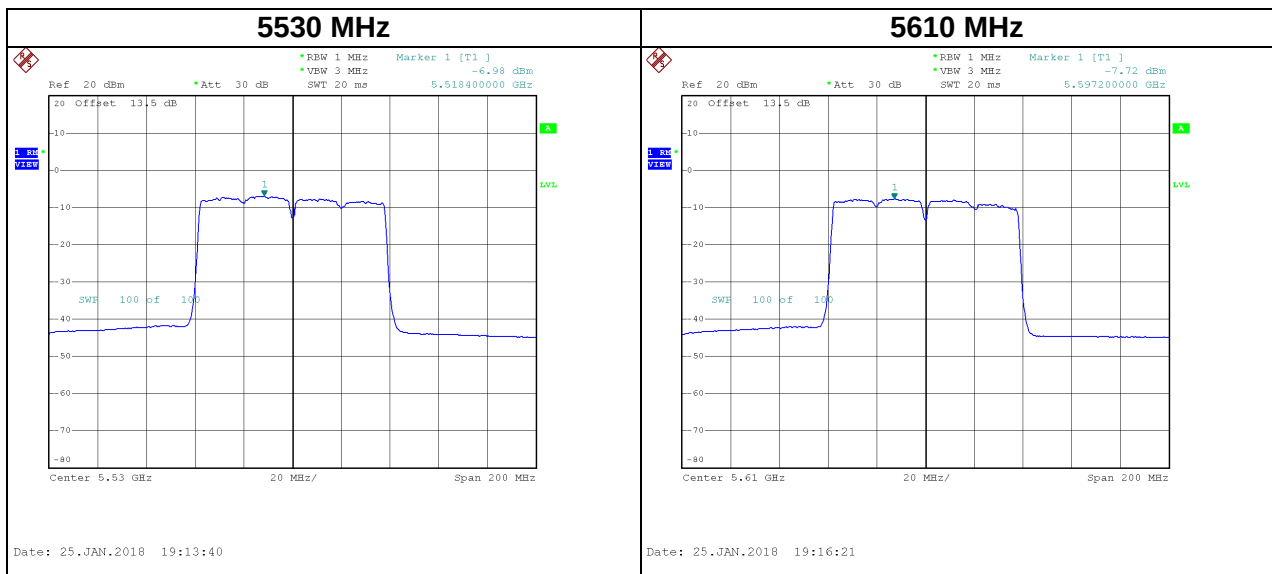

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-7.90	0.65	-7.25	11.00
CH122	5610	-8.58	0.65	-7.93	11.00

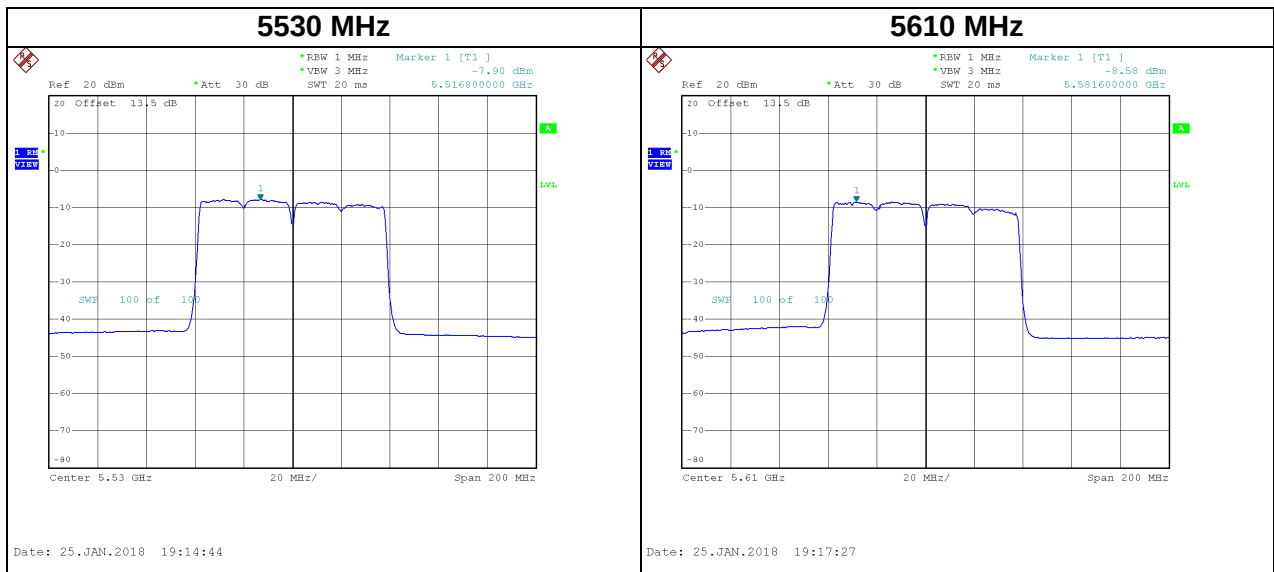


Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-4.41	11.00
CH122	5610	-5.12	11.00

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-12.66	0.65	-12.01	30.00

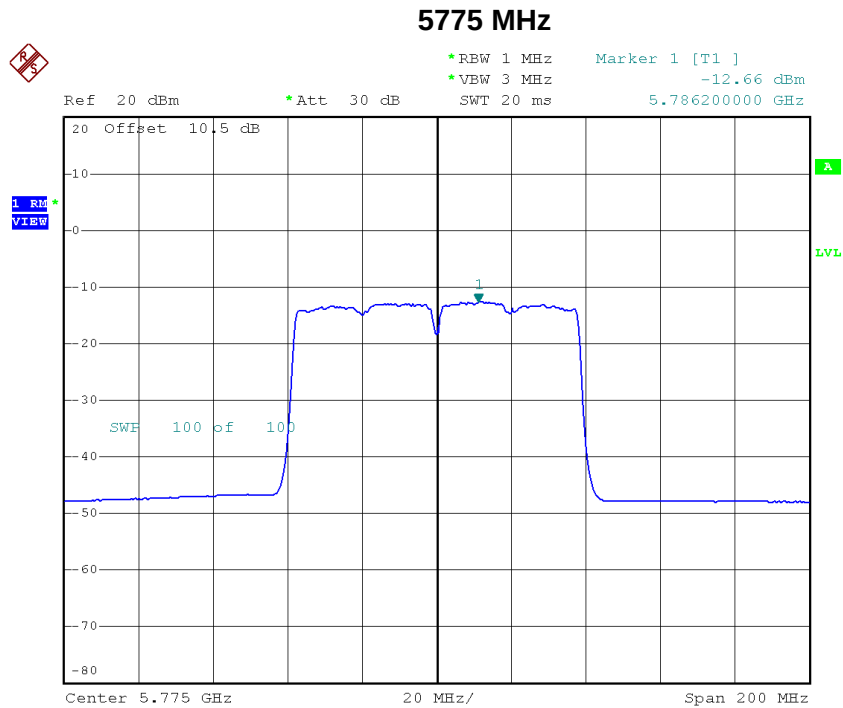

Date: 25.JAN.2018 19:19:33

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-14.21	0.65	-13.56	30.00

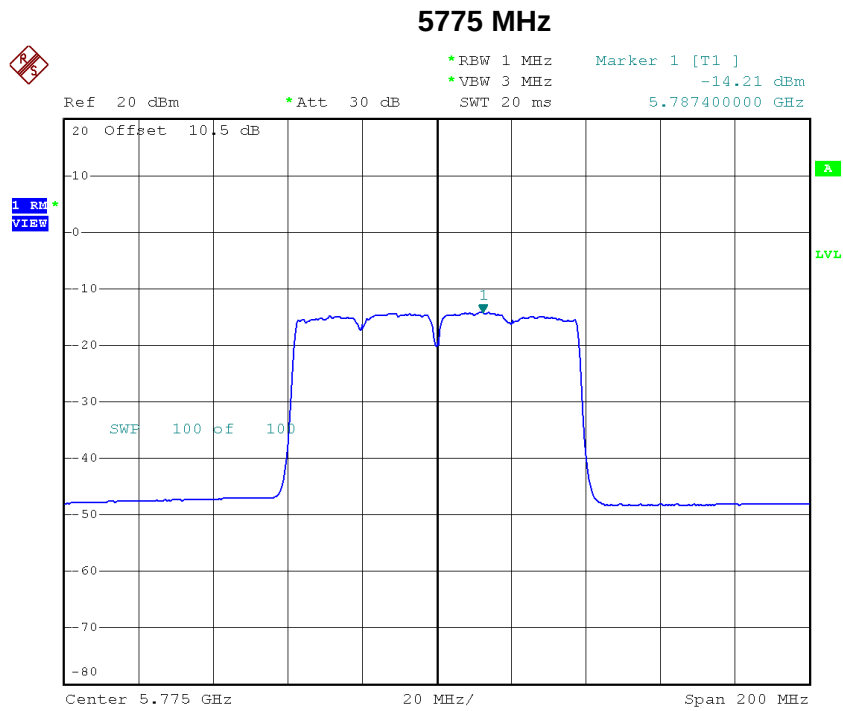

Date: 25.JAN.2018 19:20:36

Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-10.36	30.00

APPENDIX H - FREQUENCY STABILITY

Test Mode:	UNII-1
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5180.0208
120	5180.0208
108	5180.0208
Max. Deviation (MHz)	0.0208
Max. Deviation (ppm)	4.0154

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5180.0000
0	5180.0216
10	5180.0216
20	5180.0220
30	5180.0220
40	5180.0220
50	5180.0212
Max. Deviation (MHz)	0.0220
Max. Deviation (ppm)	4.2471

Test Mode:	UNII-2A
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5260.0228
120	5260.0228
108	5260.0232
Max. Deviation (MHz)	0.0232
Max. Deviation (ppm)	4.4106

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
0	5260.0236
10	5260.0236
20	5260.0236
30	5260.0236
40	5260.0236
50	5260.0236
Max. Deviation (MHz)	0.0236
Max. Deviation (ppm)	4.4867

Test Mode:	UNII-2C
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5500.0268
120	5500.0268
108	5500.0268
Max. Deviation (MHz)	0.0268
Max. Deviation (ppm)	4.8727

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5500.0000
0	5500.0276
10	5500.0276
20	5500.0280
30	5500.0280
40	5500.0284
50	5500.0272
Max. Deviation (MHz)	0.0284
Max. Deviation (ppm)	5.1636

Test Mode:	UNII-3
-------------------	---------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5745.0316
120	5745.0316
108	5745.0320
Max. Deviation (MHz)	0.0320
Max. Deviation (ppm)	5.5701

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5745.0000
0	5745.0324
10	5745.0324
20	5745.0328
30	5745.0324
40	5745.0328
50	5745.0320
Max. Deviation (MHz)	0.0328
Max. Deviation (ppm)	5.7093

End of Test Report