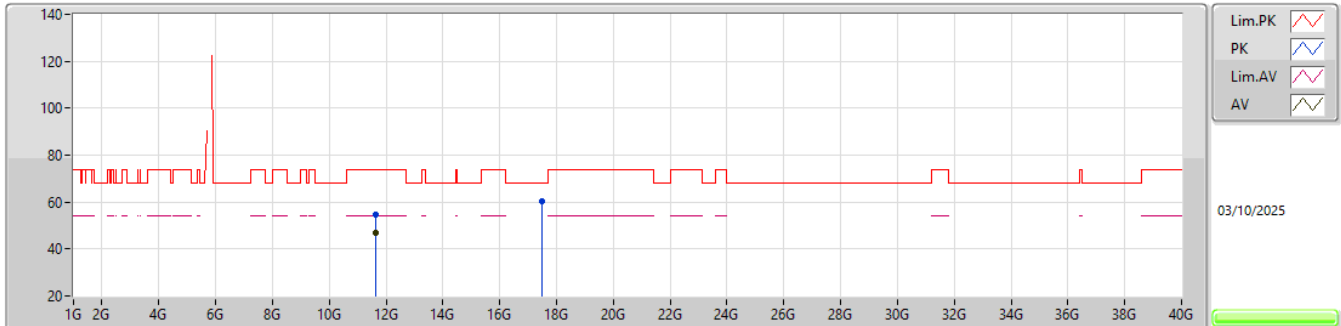


5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5825MHz_TX

EUT_Y_4TX
Setting 49
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.65063G	54.79	74.00	-19.21	48.73	3	Vertical	116	1.52	-	39.30	12.61	45.85			
AV	11.64622G	47.08	54.00	-6.92	41.03	3	Vertical	116	1.52	-	39.29	12.61	45.85			
PK	17.47194G	60.57	68.20	-7.63	47.05	3	Vertical	94	2.70	-	43.68	15.13	45.29			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5825MHz_TX

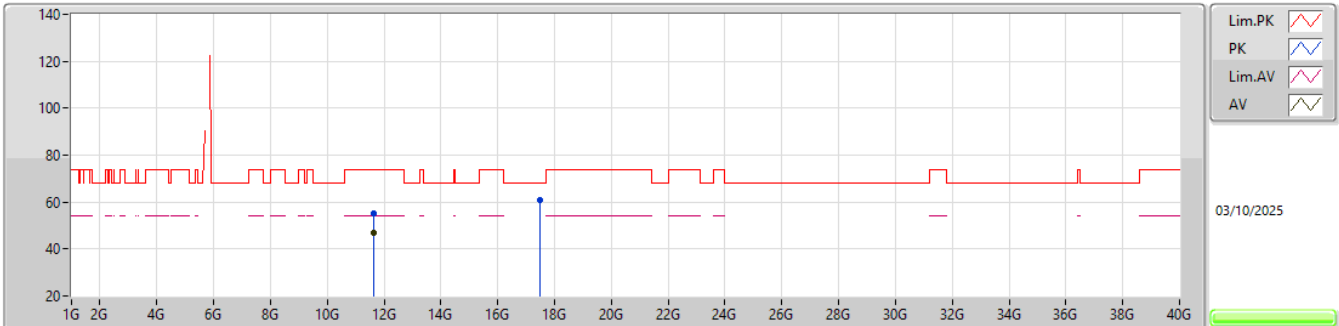EUT_Y_4TX
Setting 49
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64823G	55.27	74.00	-18.73	49.21	3	Horizontal	340	1.21	-	39.30	12.61	45.85			
AV	11.6485G	46.94	54.00	-7.06	40.88	3	Horizontal	340	1.21	-	39.30	12.61	45.85			
PK	17.46765G	60.64	68.20	-7.56	47.15	3	Horizontal	7	1.49	-	43.64	15.13	45.28			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5190MHz_TX

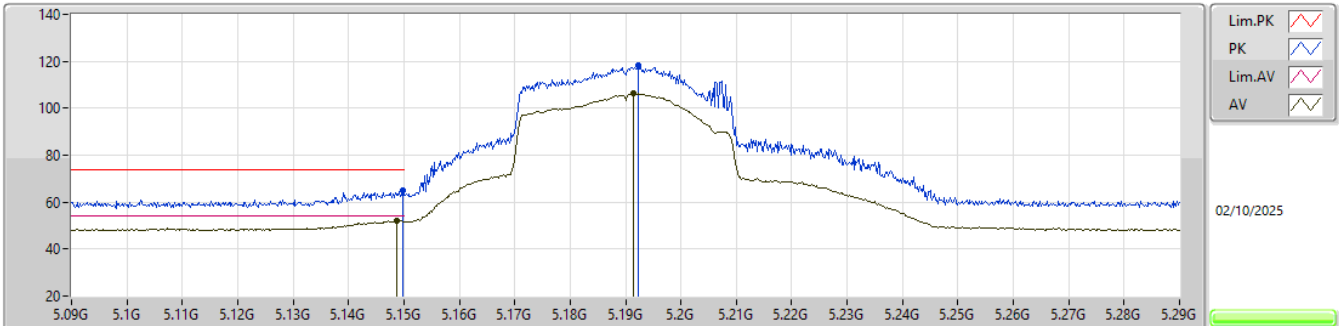


EUT_Y_4TX
Setting 30
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1498G	64.78	74.00	-9.22	67.25	3	Vertical	108	1.60	-	33.60	7.58	43.65			
AV	5.1488G	52.26	54.00	-1.74	54.73	3	Vertical	108	1.60	-	33.60	7.58	43.65			
PK	5.1924G	118.39	Inf	-Inf	120.74	3	Vertical	108	1.60	-	33.68	7.59	43.62			
AV	5.1914G	106.46	Inf	-Inf	108.81	3	Vertical	108	1.60	-	33.68	7.59	43.62			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5190MHz_TX

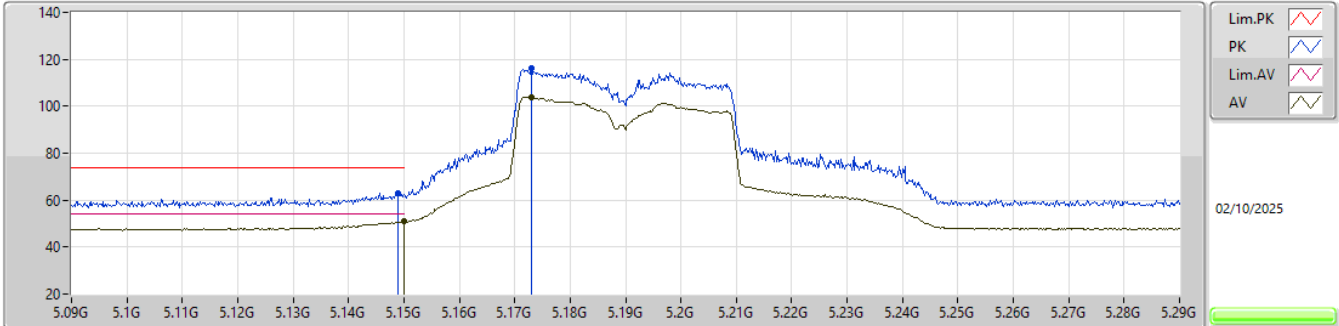


EUT Y_4TX
Setting 30
02-D-E-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.149G	63.02	74.00	-10.98	65.49	3	Horizontal	246	2.71	-	33.60	7.58	43.65			
AV	5.15G	51.07	54.00	-2.93	53.54	3	Horizontal	246	2.71	-	33.60	7.58	43.65			
PK	5.173G	116.04	Inf	-Inf	118.44	3	Horizontal	246	2.71	-	33.65	7.58	43.63			
AV	5.173G	103.96	Inf	-Inf	106.36	3	Horizontal	246	2.71	-	33.65	7.58	43.63			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5190MHz_TX

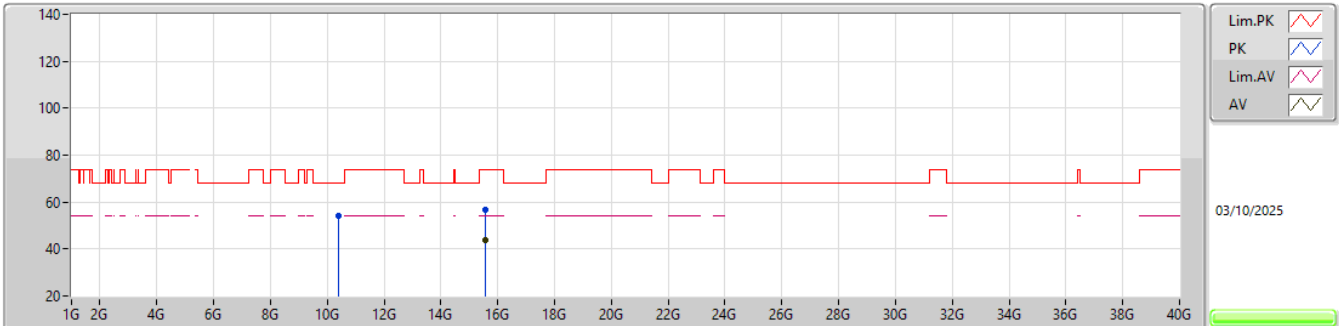


EUT_Y_4TX
Setting 30
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39023G	53.95	68.20	-14.25	48.99	3	Vertical	215	2.11	-	38.32	11.98	45.34			
PK	15.56865G	56.70	74.00	-17.30	47.39	3	Vertical	30	2.29	-	37.86	14.46	43.01			
AV	15.5577G	43.54	54.00	-10.46	34.20	3	Vertical	30	2.29	-	37.88	14.45	42.99			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5190MHz_TX

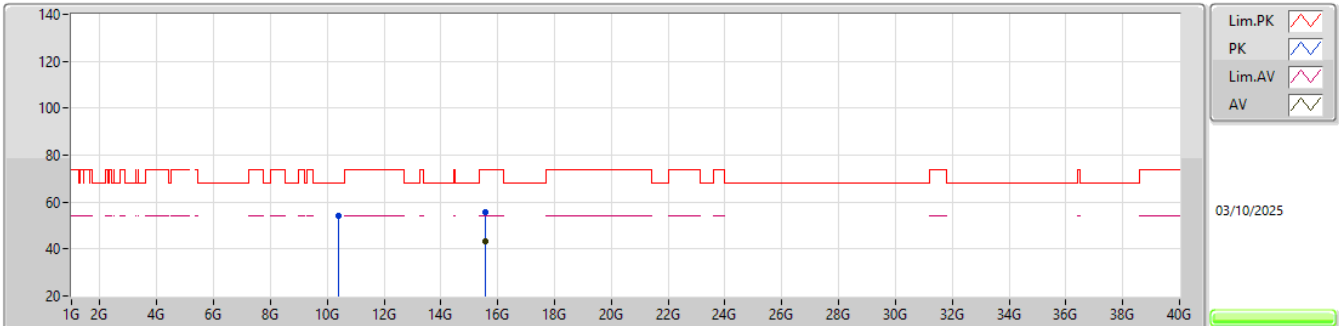


EUT_Y_4TX
Setting 30
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.37649G	54.14	68.20	-14.06	49.16	3	Horizontal	268	2.85	-	38.35	11.97	45.34			
PK	15.56346G	55.86	74.00	-18.14	46.54	3	Horizontal	282	1.55	-	37.87	14.45	43.00			
AV	15.55524G	43.39	54.00	-10.61	34.03	3	Horizontal	282	1.55	-	37.89	14.45	42.98			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5230MHz_TX

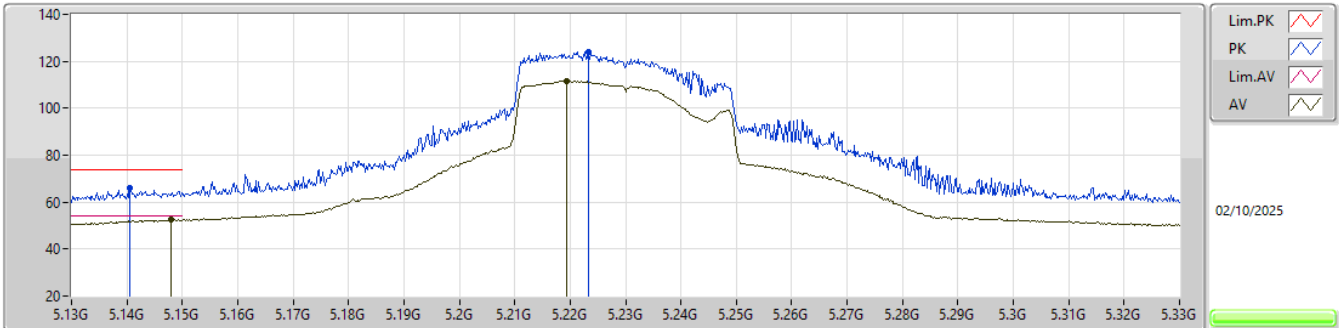


EUT_Y_4TX
Setting 44
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1406G	66.06	74.00	-7.94	68.55	3	Vertical	136	1.80	-	33.58	7.58	43.65			
AV	5.148G	52.60	54.00	-1.40	55.07	3	Vertical	136	1.80	-	33.60	7.58	43.65			
PK	5.2234G	124.02	Inf	-Inf	126.31	3	Vertical	136	1.80	-	33.70	7.61	43.60			
AV	5.2194G	111.58	Inf	-Inf	113.89	3	Vertical	136	1.80	-	33.70	7.60	43.61			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5230MHz_TX

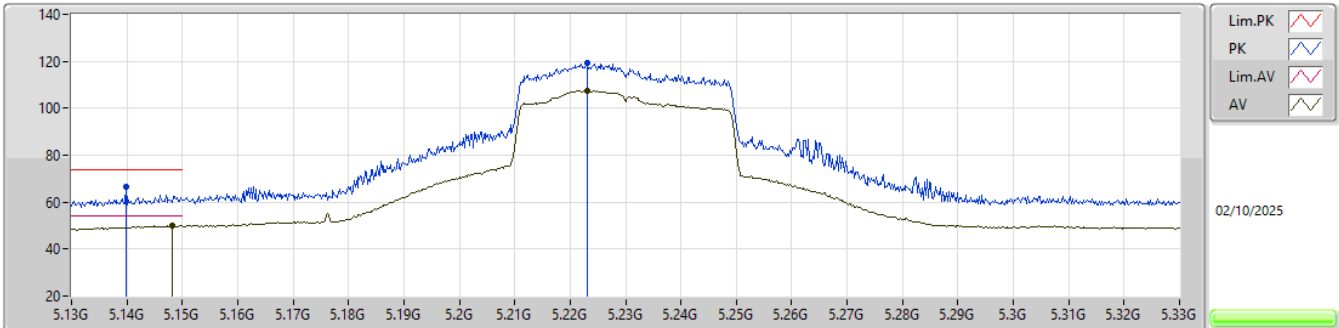


EUT_Y_4TX
Setting 44
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1398G	66.34	74.00	-7.66	68.83	3	Horizontal	200	2.67	-	33.58	7.58	43.65			
AV	5.1482G	50.13	54.00	-3.87	52.60	3	Horizontal	200	2.67	-	33.60	7.58	43.65			
PK	5.223G	119.43	Inf	-Inf	121.73	3	Horizontal	200	2.67	-	33.70	7.61	43.61			
AV	5.223G	107.49	Inf	-Inf	109.79	3	Horizontal	200	2.67	-	33.70	7.61	43.61			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5230MHz_TX

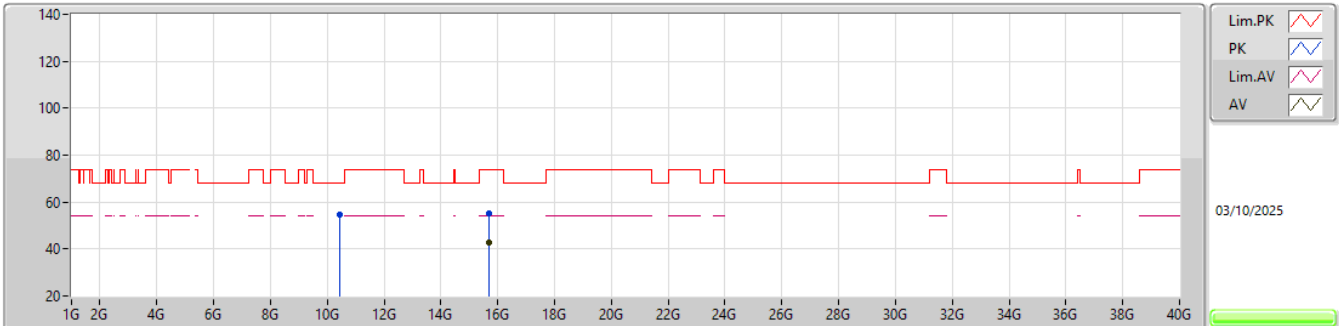


EUT_Y_4TX
Setting 44
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.44611G	54.44	68.20	-13.76	49.54	3	Vertical	42	1.80	-	38.21	12.01	45.32			
PK	15.69909G	55.42	74.00	-18.58	46.53	3	Vertical	113	1.12	-	37.60	14.57	43.28			
AV	15.675G	42.52	54.00	-11.48	33.55	3	Vertical	113	1.12	-	37.65	14.55	43.23			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5230MHz_TX

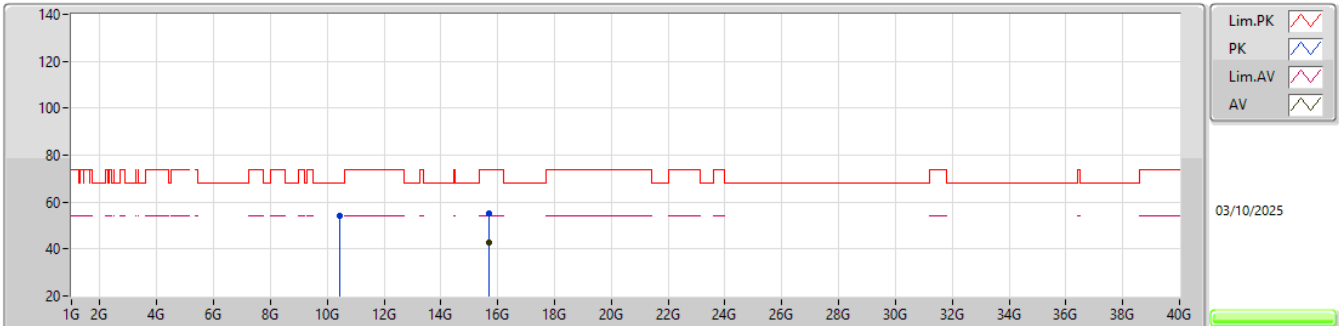


EUT_Y_4TX
Setting 44
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.45019G	53.88	68.20	-14.32	48.99	3	Horizontal	17	1.55	-	38.20	12.01	45.32			
PK	15.70008G	55.30	74.00	-18.70	46.42	3	Horizontal	321	2.69	-	37.60	14.57	43.29			
AV	15.68253G	42.72	54.00	-11.28	33.78	3	Horizontal	321	2.69	-	37.63	14.56	43.25			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5270MHz_TX

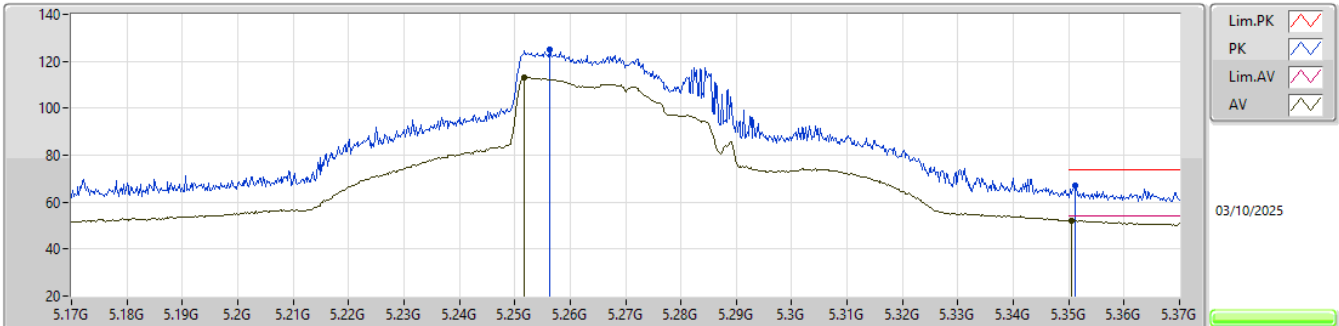


EUT Y_4TX
Setting 44
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2564G	124.76	Inf	-Inf	127.01	3	Vertical	4	1.60	-	33.71	7.63	43.59
AV	5.2518G	113.20	Inf	-Inf	115.46	3	Vertical	4	1.60	-	33.70	7.63	43.59
PK	5.3512G	67.02	74.00	-6.98	68.95	3	Vertical	4	1.60	-	33.90	7.70	43.53
AV	5.3506G	52.16	54.00	-1.84	54.09	3	Vertical	4	1.60	-	33.90	7.70	43.53

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5270MHz_TX

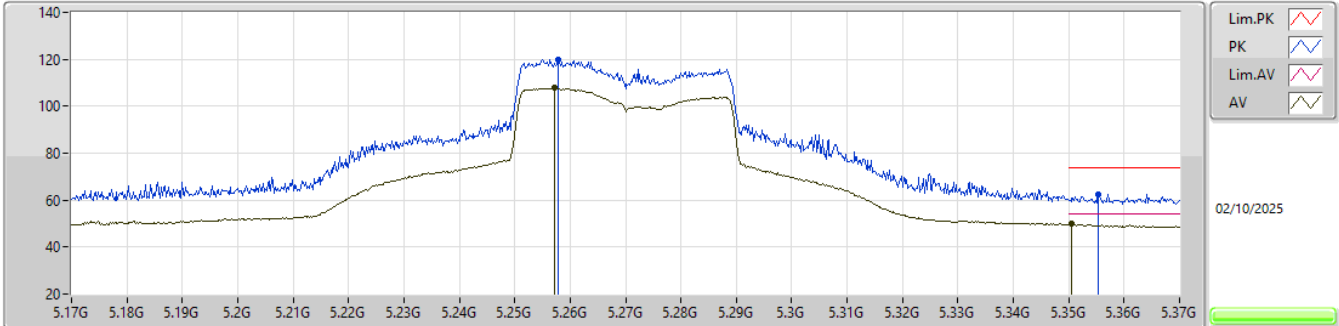


EUT_Y_4TX
Setting 44
02-D-E-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2578G	120.01	Inf	-Inf	122.25	3	Horizontal	224	1.50	-	33.72	7.63	43.59			
AV	5.2572G	107.76	Inf	-Inf	110.01	3	Horizontal	224	1.50	-	33.71	7.63	43.59			
PK	5.3554G	62.49	74.00	-11.51	64.41	3	Horizontal	224	1.50	-	33.90	7.71	43.53			
AV	5.3506G	50.05	54.00	-3.95	51.98	3	Horizontal	224	1.50	-	33.90	7.70	43.53			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5270MHz_TX

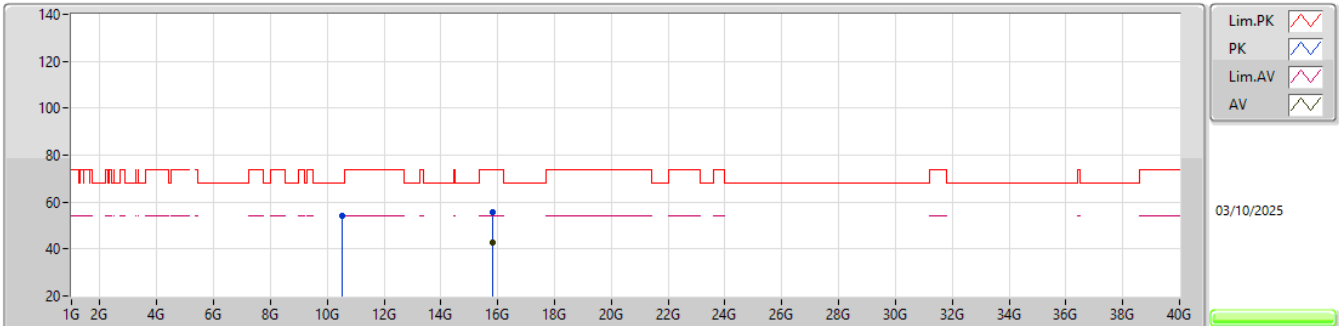EUT_Y_4TX
Setting 44
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.53418G	54.14	68.20	-14.06	49.16	3	Vertical	0	1.80	-	38.30	12.05	45.37			
PK	15.82383G	55.70	74.00	-18.30	47.11	3	Vertical	63	1.10	-	37.45	14.68	43.54			
AV	15.8175G	42.74	54.00	-11.26	34.16	3	Vertical	63	1.10	-	37.44	14.67	43.53			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5270MHz_TX

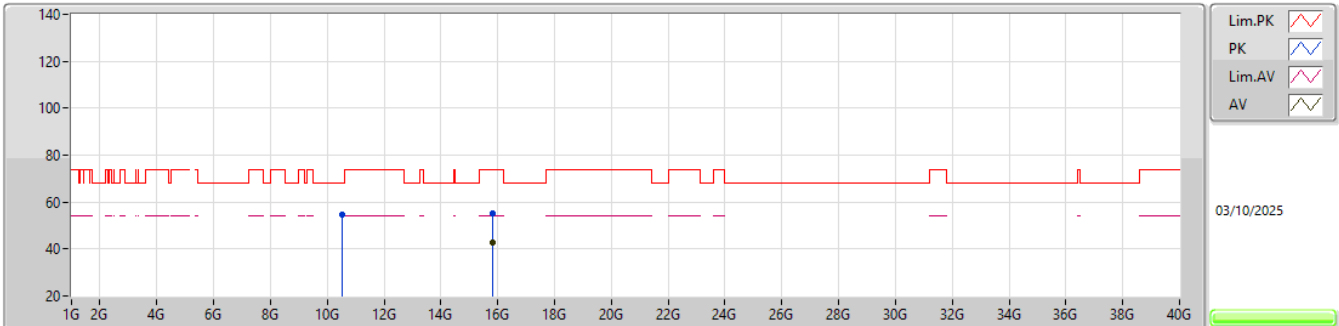


EUT_Y_4TX
Setting 44
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.54426G	54.50	68.20	-13.70	49.54	3	Horizontal	273	1.16	-	38.30	12.05	45.39			
PK	15.81228G	55.41	74.00	-18.59	46.84	3	Horizontal	235	1.21	-	37.42	14.67	43.52			
AV	15.81477G	42.79	54.00	-11.21	34.21	3	Horizontal	235	1.21	-	37.43	14.67	43.52			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5310MHz_TX

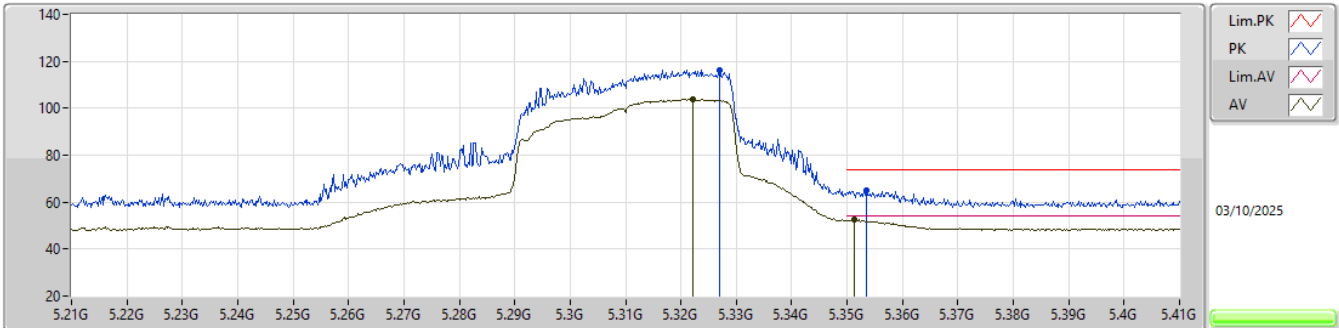


EUT_Y_4TX
Setting 29
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.327G	116.16	Inf	-Inf	118.17	3	Vertical	119	1.65	-	33.85	7.69	43.55			
AV	5.3222G	103.76	Inf	-Inf	105.79	3	Vertical	119	1.65	-	33.84	7.68	43.55			
PK	5.3534G	65.19	74.00	-8.81	67.11	3	Vertical	119	1.65	-	33.90	7.71	43.53			
AV	5.3512G	52.43	54.00	-1.57	54.36	3	Vertical	119	1.65	-	33.90	7.70	43.53			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5310MHz_TX

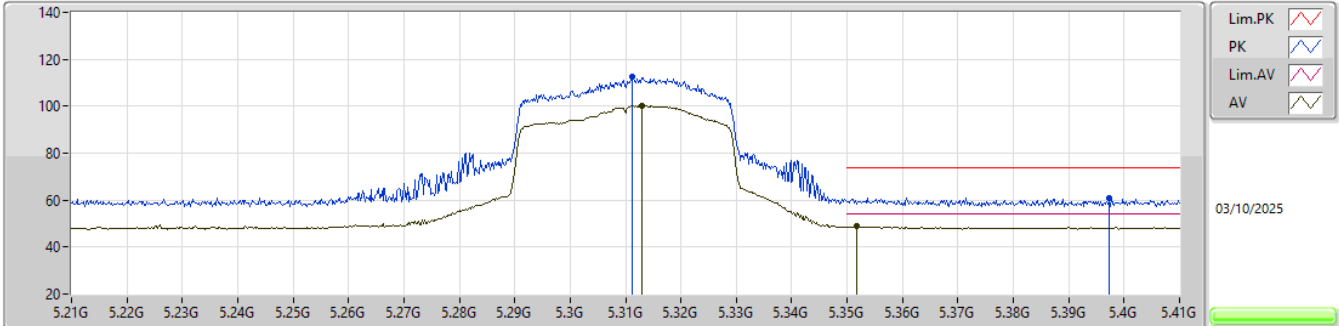


EUT_Y_4TX
Setting 29
02-D-E-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3112G	112.42	Inf	-Inf	114.49	3	Horizontal	187	1.53	-	33.82	7.67	43.56			
AV	5.313G	100.11	Inf	-Inf	102.16	3	Horizontal	187	1.53	-	33.83	7.67	43.55			
PK	5.3974G	60.86	74.00	-13.14	62.73	3	Horizontal	187	1.53	-	33.90	7.74	43.51			
AV	5.3518G	48.77	54.00	-5.23	50.70	3	Horizontal	187	1.53	-	33.90	7.70	43.53			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5310MHz_TX

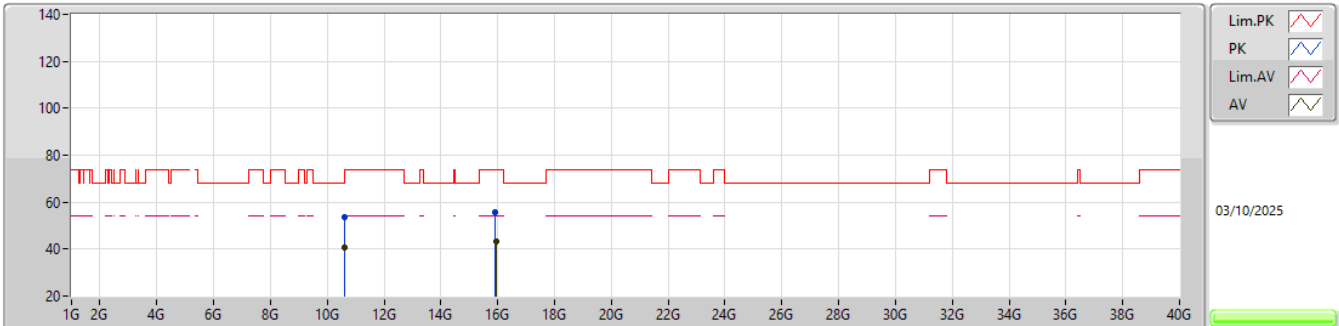


EUT_Y_4TX
Setting 29
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60959G	53.71	74.00	-20.29	48.74	3	Vertical	354	2.08	-	38.40	12.09	45.52			
AV	10.61988G	40.78	54.00	-13.22	35.83	3	Vertical	354	2.08	-	38.40	12.09	45.54			
PK	15.91911G	55.65	74.00	-18.35	47.01	3	Vertical	360	2.41	-	37.62	14.76	43.74			
AV	15.93558G	43.12	54.00	-10.88	34.57	3	Vertical	360	2.41	-	37.56	14.77	43.78			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5310MHz_TX

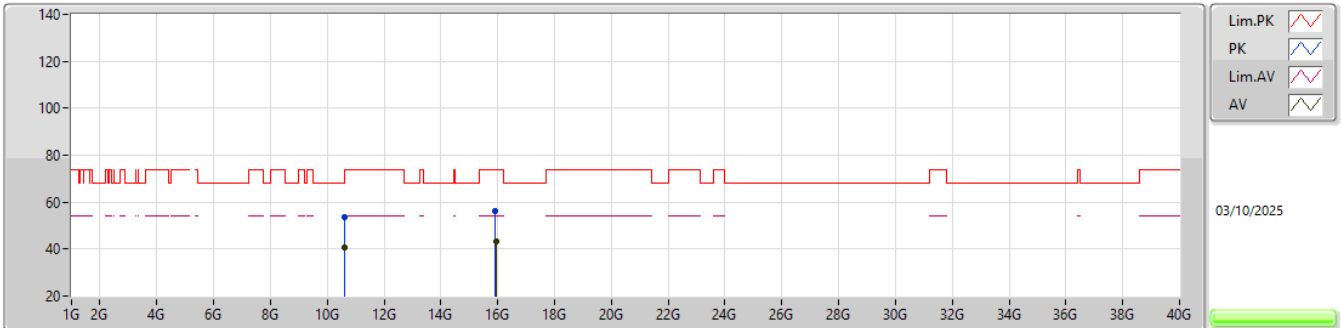


EUT_Y_4TX
Setting 29
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.62444G	53.43	74.00	-20.57	48.47	3	Horizontal	52	2.56	-	38.40	12.10	45.54			
AV	10.60605G	40.79	54.00	-13.21	35.81	3	Horizontal	52	2.56	-	38.40	12.09	45.51			
PK	15.91962G	55.98	74.00	-18.02	47.34	3	Horizontal	60	2.18	-	37.62	14.76	43.74			
AV	15.93558G	43.17	54.00	-10.83	34.62	3	Horizontal	60	2.18	-	37.56	14.77	43.78			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5510MHz_TX

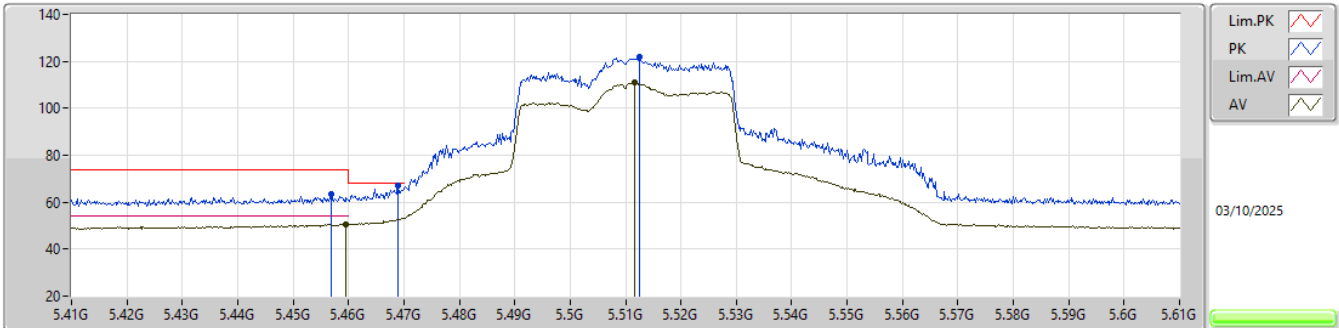


EUT_Y_4TX
Setting 36
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4568G	63.44	74.00	-10.56	65.23	3	Vertical	186	2.01	-	33.91	7.77	43.47			
AV	5.4596G	50.56	54.00	-3.44	52.33	3	Vertical	186	2.01	-	33.92	7.78	43.47			
PK	5.469G	66.85	68.20	-1.35	68.60	3	Vertical	186	2.01	-	33.94	7.78	43.47			
PK	5.5126G	121.94	Inf	-Inf	123.56	3	Vertical	186	2.01	-	34.03	7.81	43.46			
AV	5.5116G	110.83	Inf	-Inf	112.46	3	Vertical	186	2.01	-	34.02	7.81	43.46			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5510MHz_TX

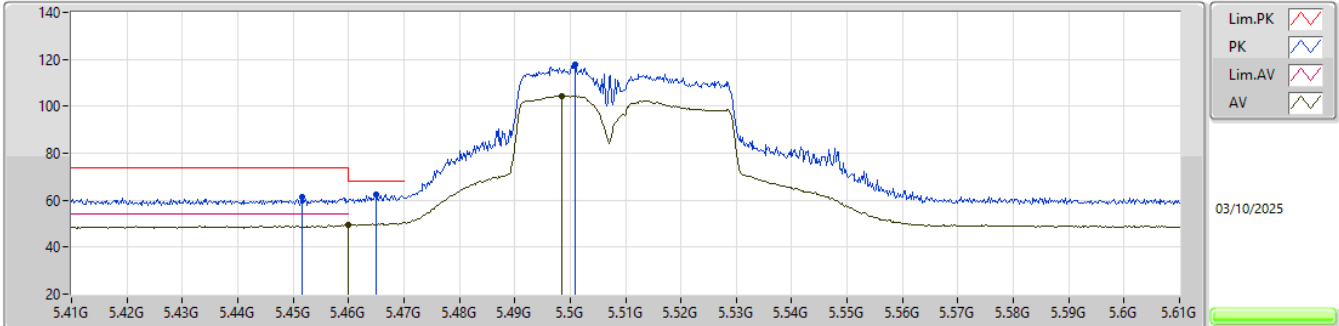


EUT_Y_4TX
Setting 36
02-D-E-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4516G	61.34	74.00	-12.66	63.15	3	Horizontal	242	1.56	-	33.90	7.77	43.48			
PK	5.465G	62.40	68.20	-5.80	64.16	3	Horizontal	242	1.56	-	33.93	7.78	43.47			
AV	5.46G	49.49	54.00	-4.51	51.26	3	Horizontal	242	1.56	-	33.92	7.78	43.47			
PK	5.501G	117.57	Inf	-Inf	119.22	3	Horizontal	242	1.56	-	34.00	7.80	43.45			
AV	5.4984G	104.53	Inf	-Inf	106.18	3	Horizontal	242	1.56	-	34.00	7.80	43.45			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5510MHz_TX

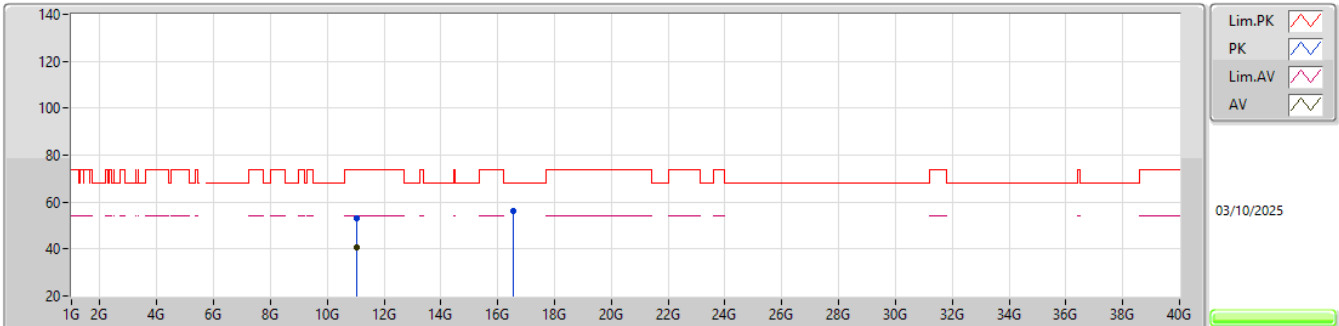


EUT_Y_4TX
Setting 36
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.02594G	53.35	74.00	-20.65	48.83	3	Vertical	306	1.15	-	38.45	12.30	46.23			
AV	11.02909G	40.55	54.00	-13.45	36.01	3	Vertical	306	1.15	-	38.46	12.30	46.22			
PK	16.54461G	56.30	68.20	-11.90	46.87	3	Vertical	229	2.05	-	39.07	14.94	44.58			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5510MHz_TX

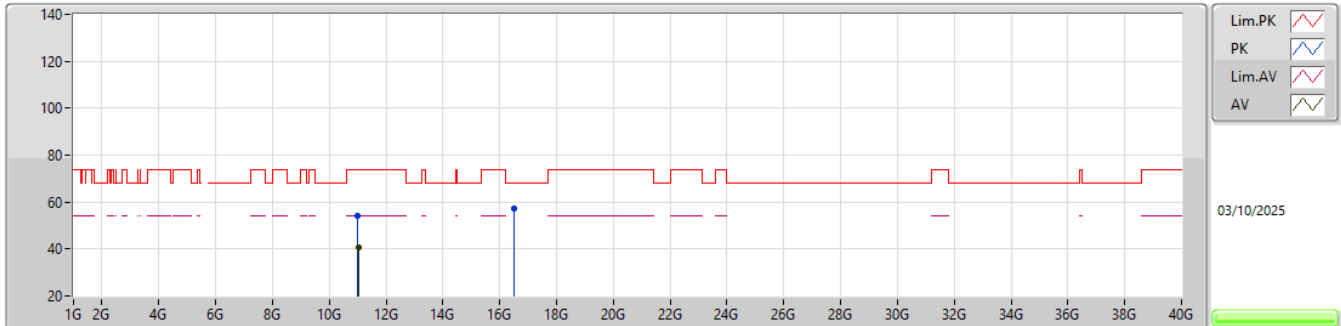EUT_Y_4TX
Setting 36
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00701G	54.09	74.00	-19.91	49.63	3	Horizontal	77	1.77	-	38.41	12.29	46.24			
AV	11.02177G	40.70	54.00	-13.30	36.19	3	Horizontal	77	1.77	-	38.44	12.30	46.23			
PK	16.51854G	57.19	68.20	-11.01	47.90	3	Horizontal	276	1.63	-	38.91	14.94	44.56			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5550MHz_TX

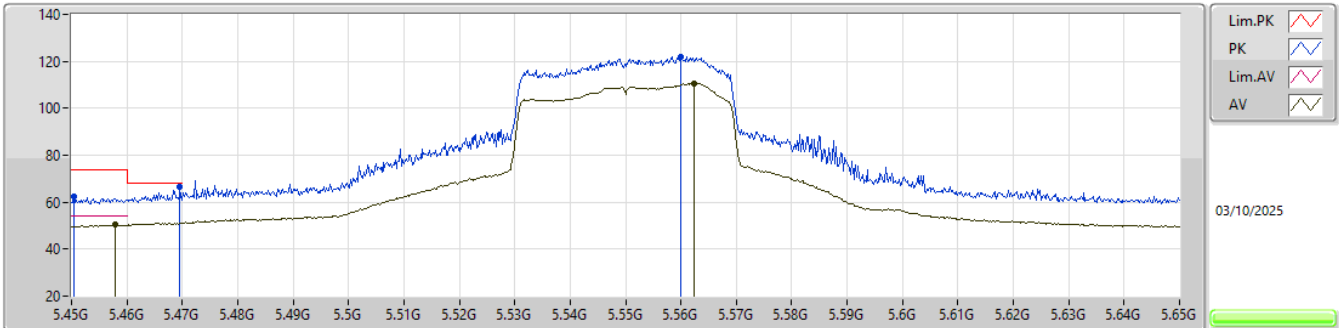


EUT_Y_4TX
Setting 39
02-D-E-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4504G	62.27	74.00	-11.73	64.08	3	Vertical	346	1.43	-	33.90	7.77	43.48			
AV	5.4578G	50.34	54.00	-3.66	52.12	3	Vertical	346	1.43	-	33.92	7.77	43.47			
PK	5.4696G	66.68	68.20	-1.52	68.43	3	Vertical	346	1.43	-	33.94	7.78	43.47			
PK	5.56G	122.13	Inf	-Inf	123.71	3	Vertical	346	1.43	-	34.08	7.84	43.50			
AV	5.5624G	110.68	Inf	-Inf	112.26	3	Vertical	346	1.43	-	34.08	7.84	43.50			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5550MHz_TX

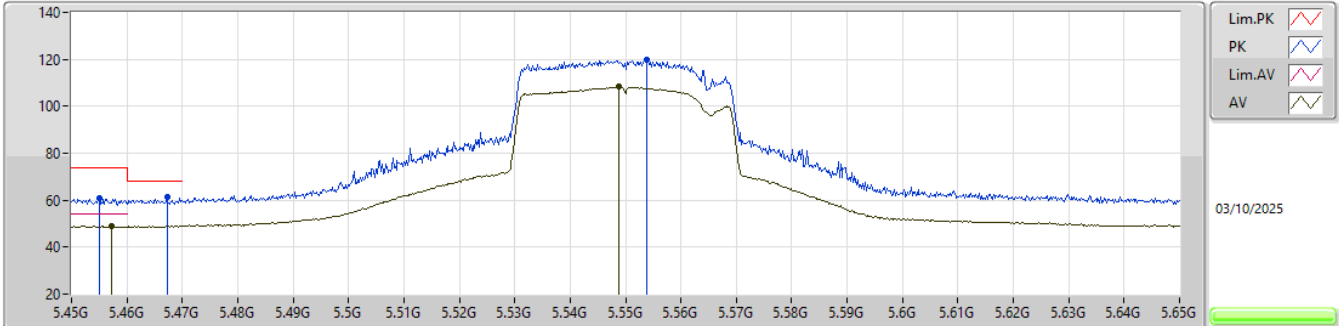


EUT_Y_4TX
Setting 39
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.455G	60.81	74.00	-13.19	62.61	3	Horizontal	251	3.00	-	33.91	7.77	43.48			
AV	5.4572G	48.99	54.00	-5.01	50.78	3	Horizontal	251	3.00	-	33.91	7.77	43.47			
PK	5.4672G	61.48	68.20	-6.72	63.24	3	Horizontal	251	3.00	-	33.93	7.78	43.47			
PK	5.5538G	119.90	Inf	-Inf	121.48	3	Horizontal	251	3.00	-	34.09	7.83	43.50			
AV	5.5488G	108.20	Inf	-Inf	109.76	3	Horizontal	251	3.00	-	34.10	7.83	43.49			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5550MHz_TX

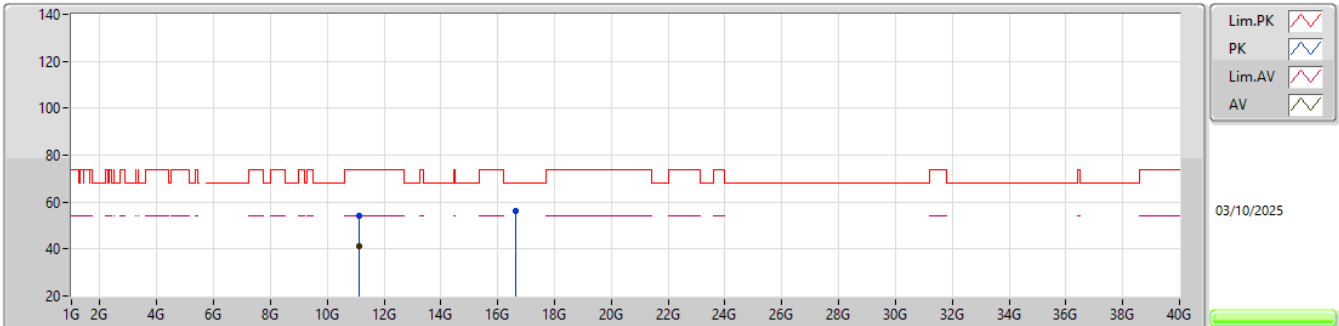


EUT_Y_4TX
Setting 39
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.10603G	53.99	74.00	-20.01	49.21	3	Vertical	58	2.87	-	38.59	12.34	46.15			
AV	11.10894G	41.03	54.00	-12.97	36.26	3	Vertical	58	2.87	-	38.58	12.34	46.15			
PK	16.64475G	56.41	68.20	-11.79	46.33	3	Vertical	222	1.75	-	39.77	14.96	44.65			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5550MHz_TX

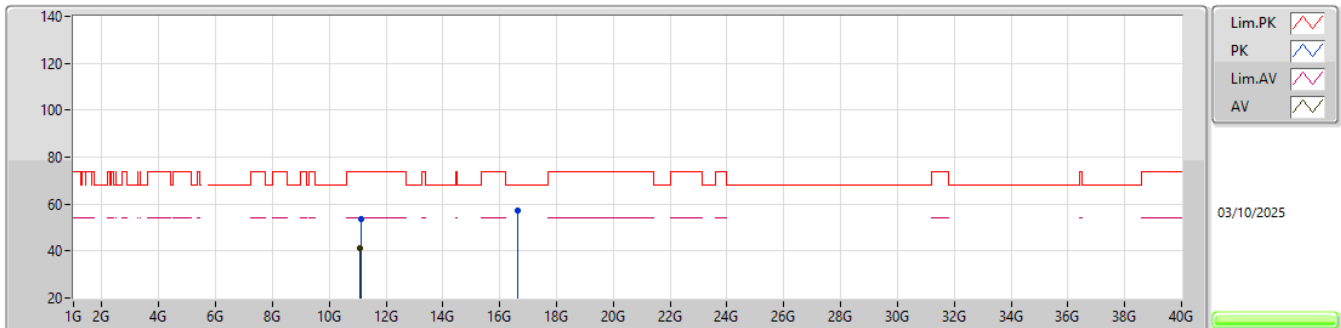


EUT Y_4TX
Setting 39
02-D-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.11296G	53.83	74.00	-20.17	49.07	3	Horizontal	121	2.82	-	38.57	12.34	46.15			
AV	11.09844G	41.25	54.00	-12.75	36.48	3	Horizontal	121	2.82	-	38.60	12.33	46.16			
PK	16.64709G	57.21	68.20	-10.99	47.13	3	Horizontal	29	1.24	-	39.78	14.96	44.66			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5670MHz_TX

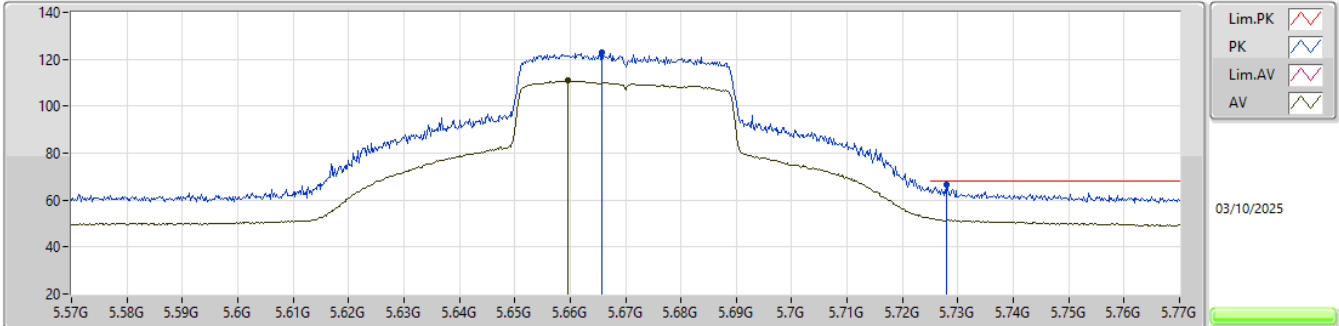


EUT_Y_4TX
Setting 39
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.658G	122.88	Inf	-Inf	124.50	3	Vertical	197	2.48	-	34.00	7.98	43.60			
AV	5.6596G	111.04	Inf	-Inf	112.67	3	Vertical	197	2.48	-	34.00	7.96	43.59			
PK	5.728G	66.58	68.20	-1.62	68.15	3	Vertical	197	2.48	-	34.00	8.08	43.65			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5670MHz_TX

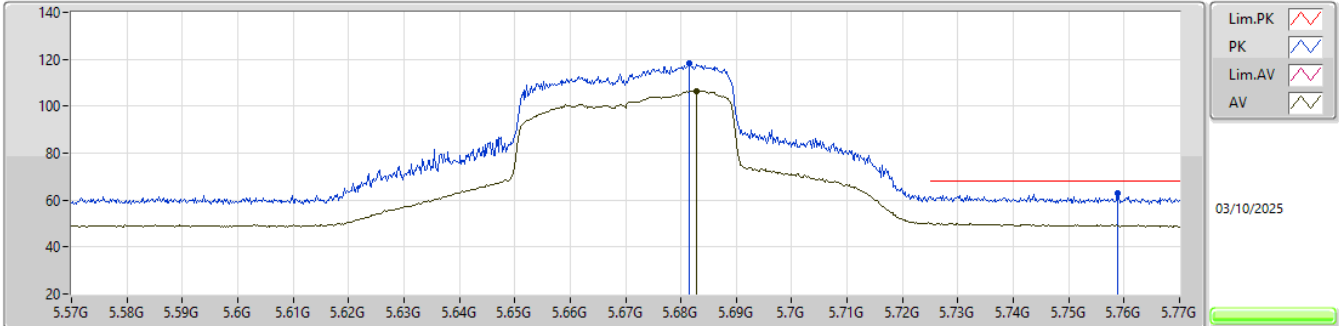


EUT_Y_4TX
Setting 39
02-D-E-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6816G	118.24	Inf	-Inf	119.85	3	Horizontal	43	2.76	-	34.00	8.00	43.61			
AV	5.6828G	106.61	Inf	-Inf	108.22	3	Horizontal	43	2.76	-	34.00	8.00	43.61			
PK	5.7588G	62.87	68.20	-5.33	64.41	3	Horizontal	43	2.76	-	34.00	8.14	43.68			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5670MHz_TX

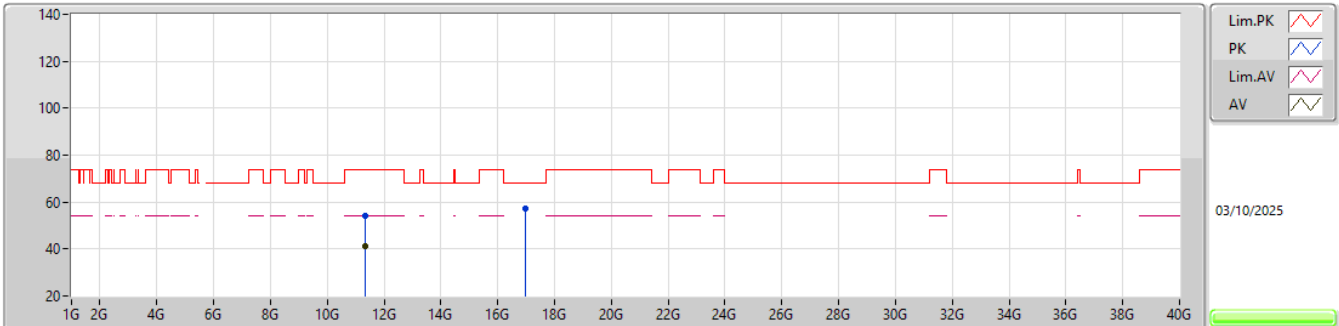EUT_Y_4TX
Setting 39
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.33376G	54.39	74.00	-19.61	49.22	3	Vertical	59	2.05	-	38.67	12.45	45.95			
AV	11.34474G	41.41	54.00	-12.59	36.20	3	Vertical	59	2.05	-	38.69	12.46	45.94			
PK	16.99569G	57.31	68.20	-10.89	46.02	3	Vertical	148	1.81	-	41.17	15.03	44.91			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5670MHz_TX

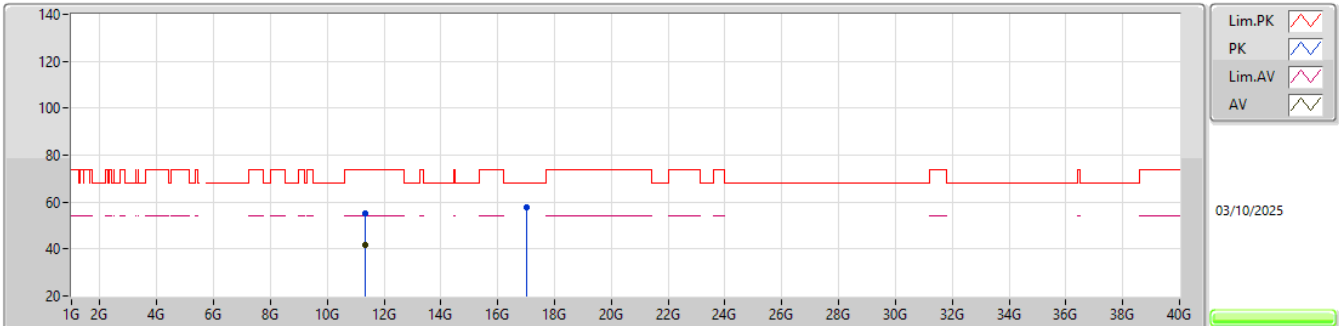EUT_Y_4TX
Setting 39
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.34699G	55.19	74.00	-18.81	49.98	3	Horizontal	343	1.53	-	38.69	12.46	45.94			
AV	11.34606G	41.54	54.00	-12.46	36.33	3	Horizontal	343	1.53	-	38.69	12.46	45.94			
PK	17.00454G	57.94	68.20	-10.26	46.60	3	Horizontal	278	2.29	-	41.21	15.04	44.91			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

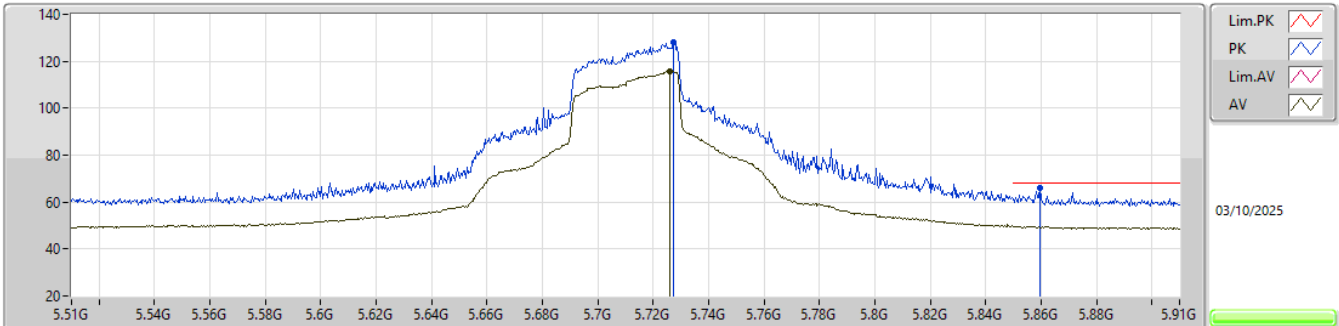


EUT_Y_4TX
Setting 48
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7272G	128.13	Inf	-Inf	129.70	3	Vertical	223	2.86	-	34.00	8.08	43.65			
AV	5.726G	115.62	Inf	-Inf	117.19	3	Vertical	223	2.86	-	34.00	8.08	43.65			
PK	5.8596G	66.24	68.20	-1.96	67.89	3	Vertical	223	2.86	-	33.94	8.18	43.77			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5710MHz Straddle 5.47-5.725GHz_TX

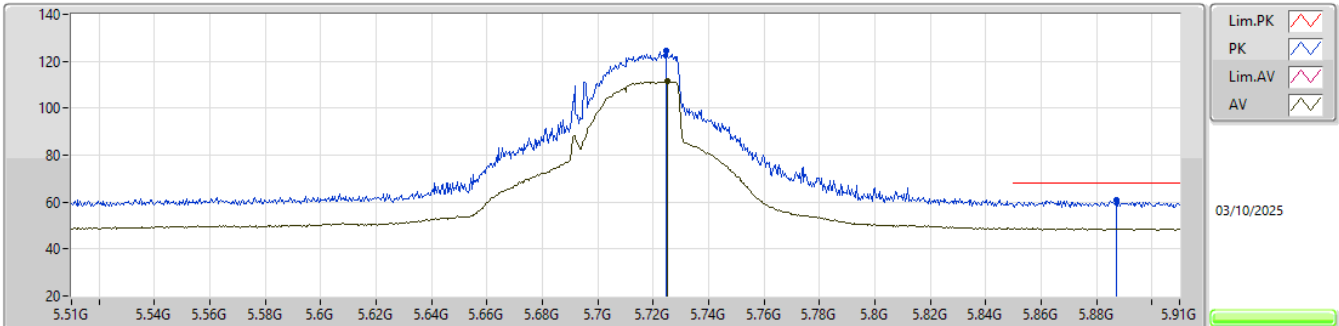EUT_Y_4TX
Setting 48
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.7248G	124.74	Inf	-Inf	126.31	3	Horizontal	246	2.44	-	34.00	8.08	43.65
AV	5.7252G	111.48	Inf	-Inf	113.05	3	Horizontal	246	2.44	-	34.00	8.08	43.65
PK	5.8872G	60.65	68.20	-7.55	62.22	3	Horizontal	246	2.44	-	34.05	8.17	43.79

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5710MHz Straddle 5.47-5.725GHz_TX

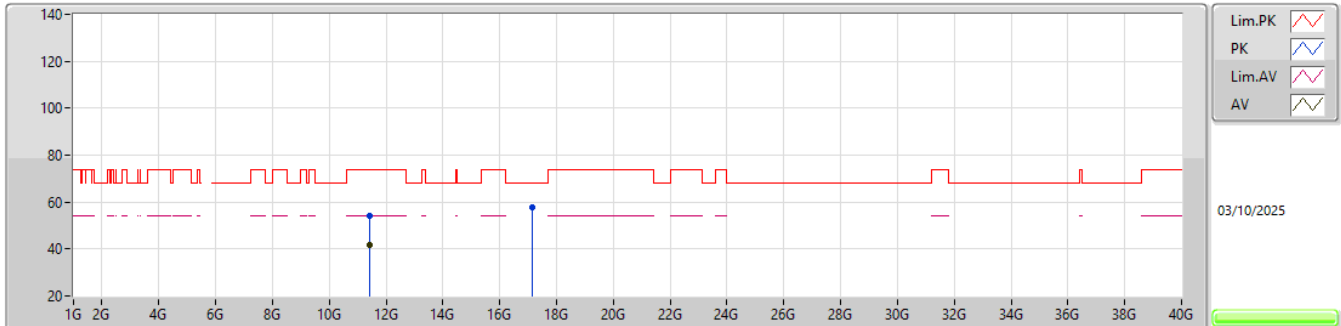EUT_Y_4TX
Setting 48
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.41643G	53.98	74.00	-20.02	48.63	3	Vertical	89	1.57	-	38.73	12.50	45.88			
AV	11.43233G	41.68	54.00	-12.32	36.28	3	Vertical	89	1.57	-	38.76	12.50	45.86			
PK	17.1354G	57.55	68.20	-10.65	45.97	3	Vertical	307	2.62	-	41.54	15.06	45.02			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5710MHz Straddle 5.47-5.725GHz_TX

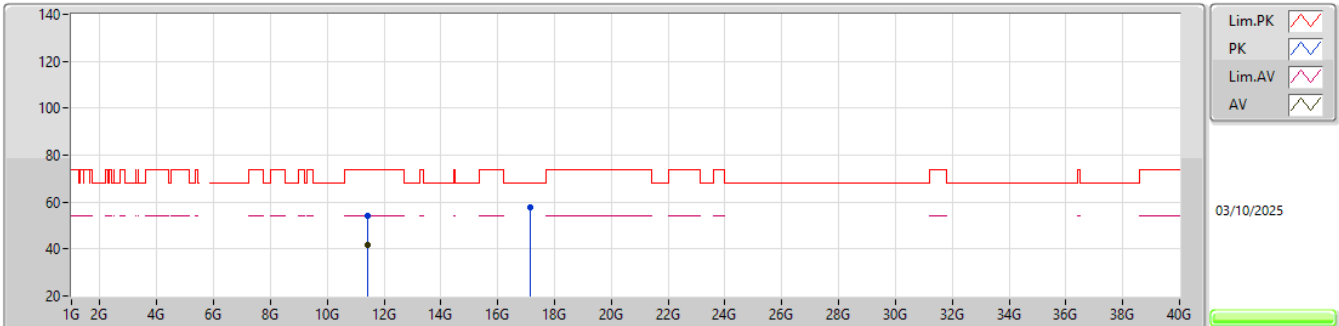EUT_Y_4TX
Setting 48
02-D-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43401G	54.29	74.00	-19.71	48.88	3	Horizontal	9	2.28	-	38.77	12.50	45.86			
AV	11.42651G	41.58	54.00	-12.42	36.20	3	Horizontal	9	2.28	-	38.75	12.50	45.87			
PK	17.14236G	57.61	68.20	-10.59	46.00	3	Horizontal	64	1.33	-	41.57	15.06	45.02			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5755MHz_TX

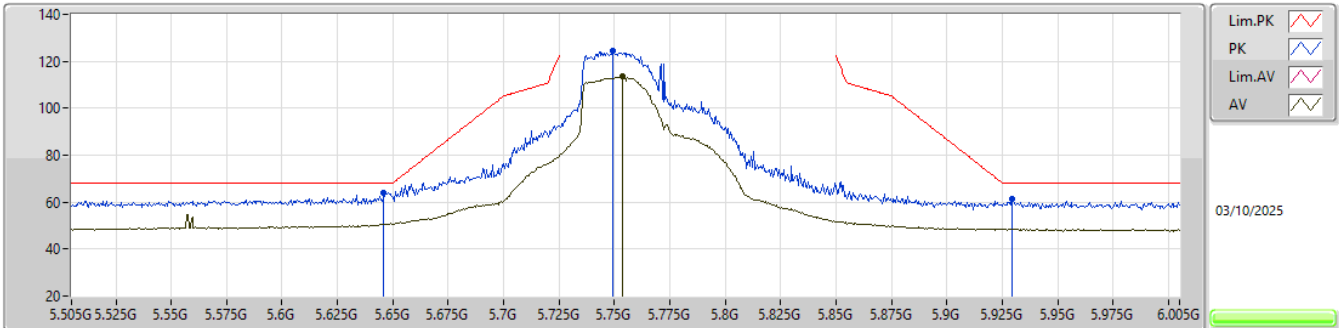


EUT_Y_4TX
Setting 47
02-D-E-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.646G	64.22	68.20	-3.98	65.86	3	Vertical	75	1.77	-	34.00	7.94	43.58
PK	5.7495G	124.23	Inf	-Inf	125.78	3	Vertical	75	1.77	-	34.00	8.12	43.67
AV	5.7535G	113.49	Inf	-Inf	115.03	3	Vertical	75	1.77	-	34.00	8.13	43.67
PK	5.9295G	61.26	68.20	-6.94	62.78	3	Vertical	75	1.77	-	34.16	8.15	43.83

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5755MHz_TX

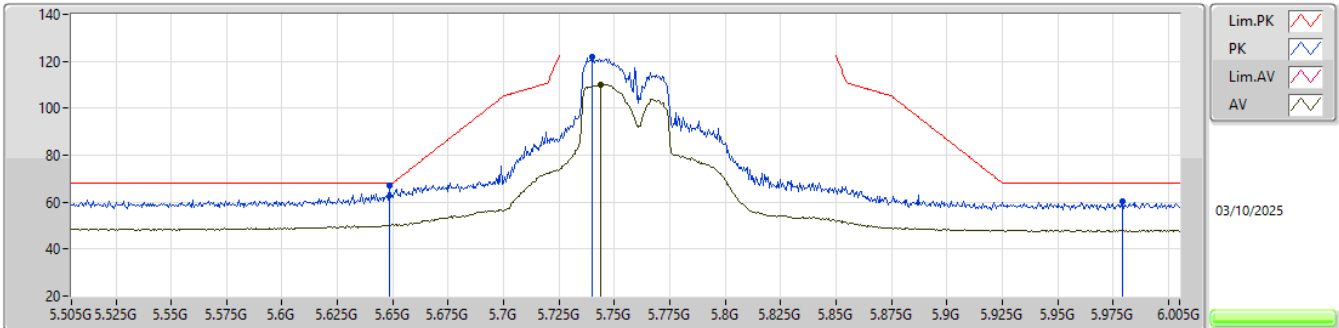EUT_Y_4TX
Setting 47
02-D-E-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6485G	66.86	68.20	-1.34	68.50	3	Horizontal	57	2.65	-	34.00	7.94	43.58			
PK	5.74G	121.64	Inf	-Inf	123.19	3	Horizontal	57	2.65	-	34.00	8.11	43.66			
AV	5.7435G	110.25	Inf	-Inf	111.80	3	Horizontal	57	2.65	-	34.00	8.11	43.66			
PK	5.9795G	60.19	68.20	-8.01	61.67	3	Horizontal	57	2.65	-	34.26	8.13	43.87			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5755MHz_TX

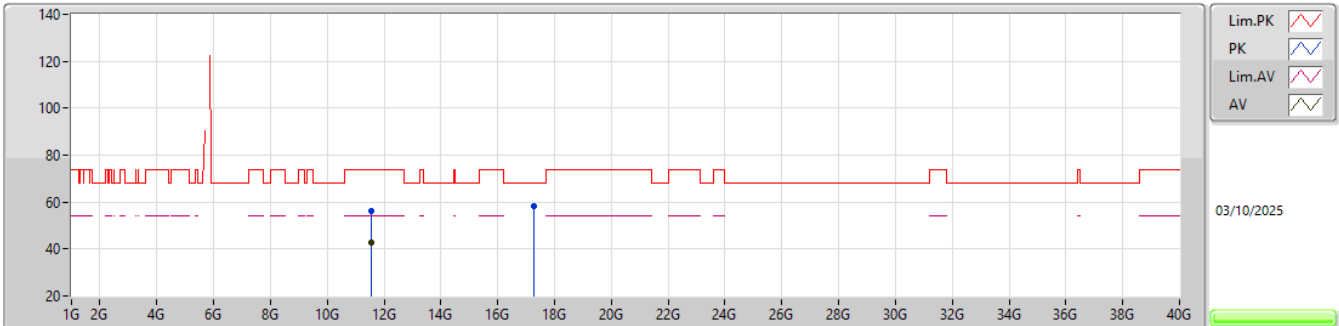EUT_Y_4TX
Setting 47
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5437G	56.26	74.00	-17.74	50.42	3	Vertical	119	1.10	-	39.09	12.56	45.81			
AV	11.5451G	42.79	54.00	-11.21	36.96	3	Vertical	119	1.10	-	39.09	12.56	45.82			
PK	17.26G	58.24	68.20	-9.96	46.09	3	Vertical	117	1.44	-	42.18	15.09	45.12			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5755MHz_TX

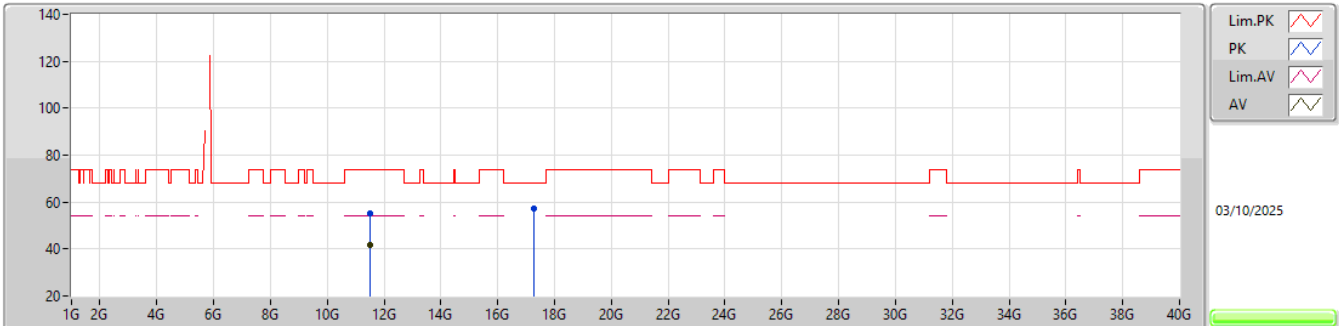EUT_Y_4TX
Setting 47
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50895G	55.03	74.00	-18.97	49.27	3	Horizontal	99	1.99	-	39.02	12.54	45.80			
AV	11.52295G	41.88	54.00	-12.12	36.09	3	Horizontal	99	1.99	-	39.05	12.55	45.81			
PK	17.27065G	57.48	68.20	-10.72	45.25	3	Horizontal	35	1.34	-	42.27	15.09	45.13			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5795MHz_TX

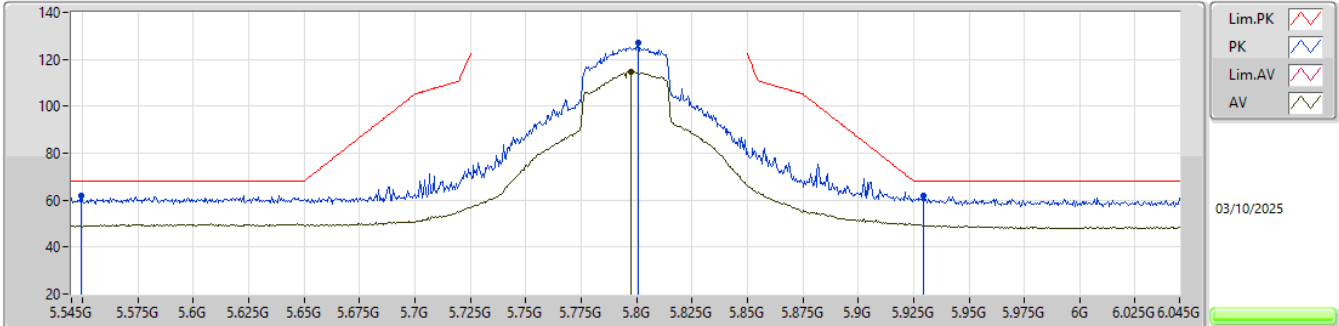


EUT_Y_4TX
Setting 49
02-D-E-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.5495G	62.02	68.20	-6.18	63.58	3	Vertical	105	1.67	-	34.10	7.83	43.49			
PK	5.801G	127.10	Inf	-Inf	128.60	3	Vertical	105	1.67	-	34.00	8.21	43.71			
AV	5.7975G	114.82	Inf	-Inf	116.32	3	Vertical	105	1.67	-	34.00	8.21	43.71			
PK	5.9295G	62.14	68.20	-6.06	63.66	3	Vertical	105	1.67	-	34.16	8.15	43.83			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5795MHz_TX

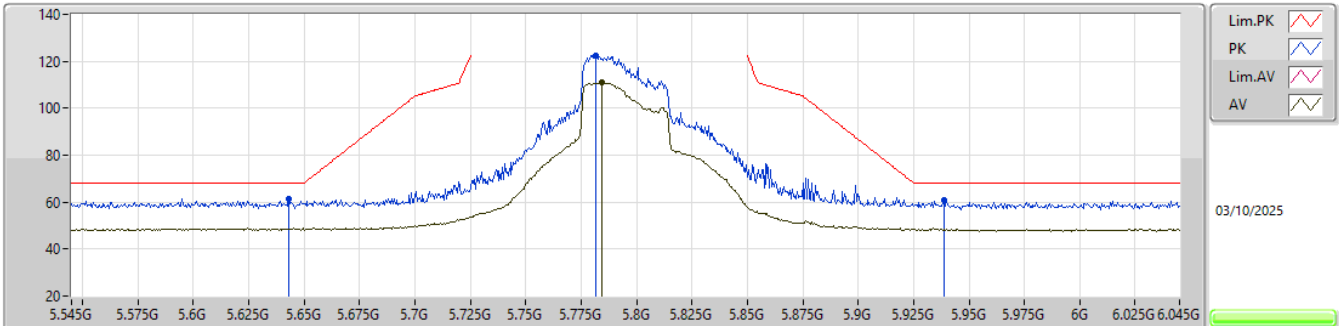


EUT_Y_4TX
Setting 49
02-D-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.643G	61.50	68.20	-6.70	63.14	3	Horizontal	92	1.60	-	34.00	7.94	43.58
PK	5.7815G	122.64	Inf	-Inf	124.16	3	Horizontal	92	1.60	-	34.00	8.18	43.70
AV	5.7845G	111.03	Inf	-Inf	112.55	3	Horizontal	92	1.60	-	34.00	8.18	43.70
PK	5.9385G	60.76	68.20	-7.44	62.27	3	Horizontal	92	1.60	-	34.18	8.15	43.84

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5795MHz_TX

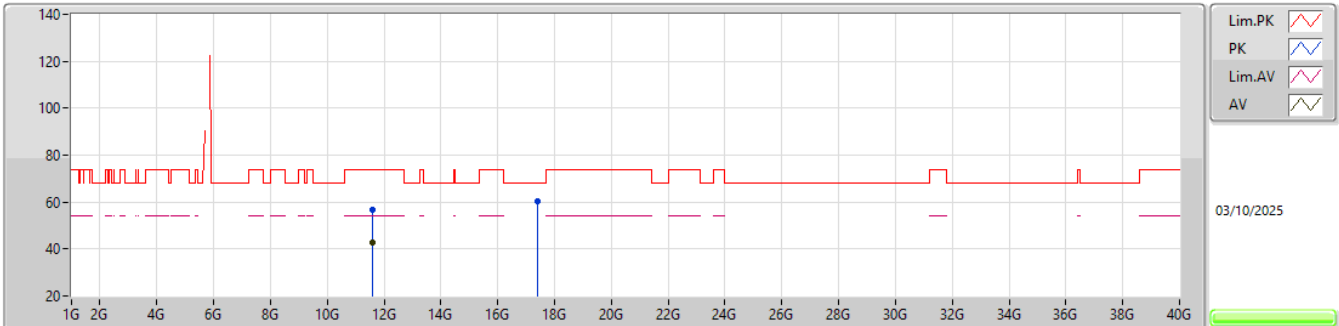EUT_Y_4TX
Setting 49
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.60275G	56.53	74.00	-17.47	50.56	3	Vertical	120	1.93	-	39.21	12.59	45.83			
AV	11.5853G	42.74	54.00	-11.26	36.82	3	Vertical	120	1.93	-	39.17	12.58	45.83			
PK	17.3826G	60.27	68.20	-7.93	47.35	3	Vertical	93	1.98	-	43.03	15.11	45.22			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5795MHz_TX

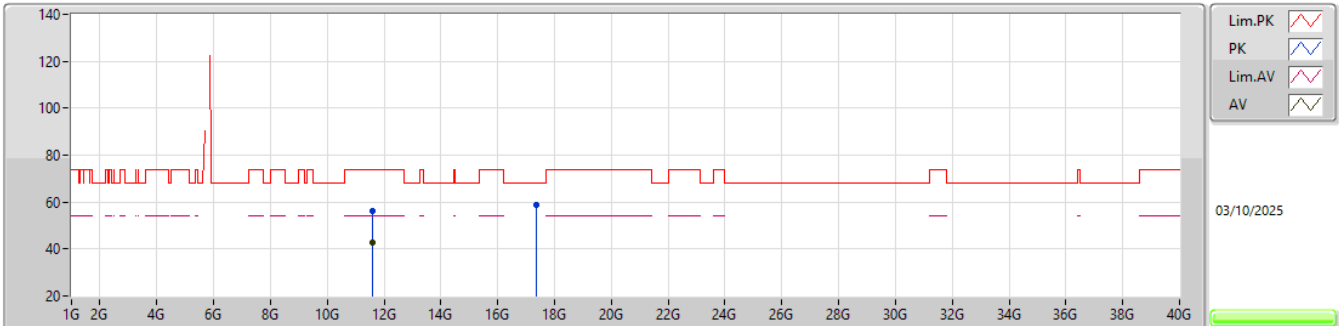EUT_Y_4TX
Setting 49
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57565G	56.04	74.00	-17.96	50.14	3	Horizontal	5	1.77	-	39.15	12.58	45.83			
AV	11.58685G	42.65	54.00	-11.35	36.73	3	Horizontal	5	1.77	-	39.17	12.58	45.83			
PK	17.3798G	58.62	68.20	-9.58	45.70	3	Horizontal	37	1.80	-	43.02	15.11	45.21			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5210MHz_TX

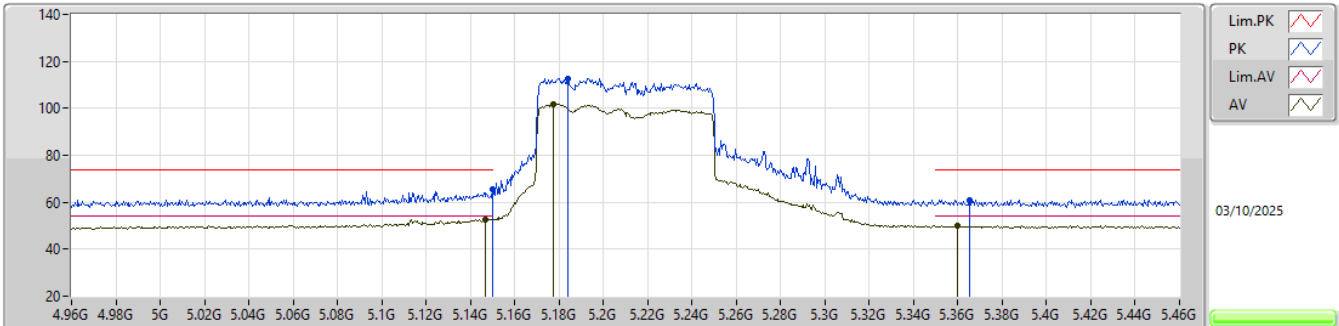EUT Y_4TX
Setting 34
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	65.70	74.00	-8.30	54.65	3	Vertical	124	2.31	-	33.60	7.58	30.13			
AV	5.147G	52.76	54.00	-1.24	41.72	3	Vertical	124	2.31	-	33.59	7.58	30.13			
PK	5.184G	112.80	Inf	-Inf	101.69	3	Vertical	124	2.31	-	33.67	7.59	30.15			
AV	5.1775G	101.69	Inf	-Inf	90.58	3	Vertical	124	2.31	-	33.66	7.59	30.14			
PK	5.365G	61.11	74.00	-12.89	49.74	3	Vertical	124	2.31	-	33.90	7.71	30.24			
AV	5.36G	49.98	54.00	-4.02	38.61	3	Vertical	124	2.31	-	33.90	7.71	30.24			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

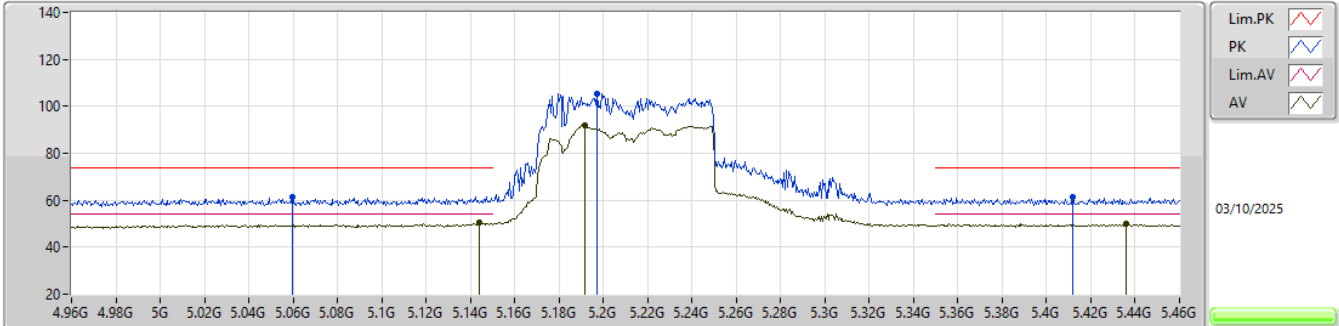


EUT Y_4TX
Setting 34
02-D-i-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.0595G	61.60	74.00	-12.40	50.70	3	Horizontal	236	2.68	-	33.42	7.56	30.08
AV	5.144G	50.31	54.00	-3.69	39.26	3	Horizontal	236	2.68	-	33.59	7.58	30.12
PK	5.197G	105.55	Inf	-Inf	94.42	3	Horizontal	236	2.68	-	33.69	7.59	30.15
AV	5.1915G	92.07	Inf	-Inf	80.95	3	Horizontal	236	2.68	-	33.68	7.59	30.15
PK	5.412G	61.36	74.00	-12.64	49.97	3	Horizontal	236	2.68	-	33.90	7.75	30.26
AV	5.436G	50.05	54.00	-3.95	38.67	3	Horizontal	236	2.68	-	33.90	7.76	30.28

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

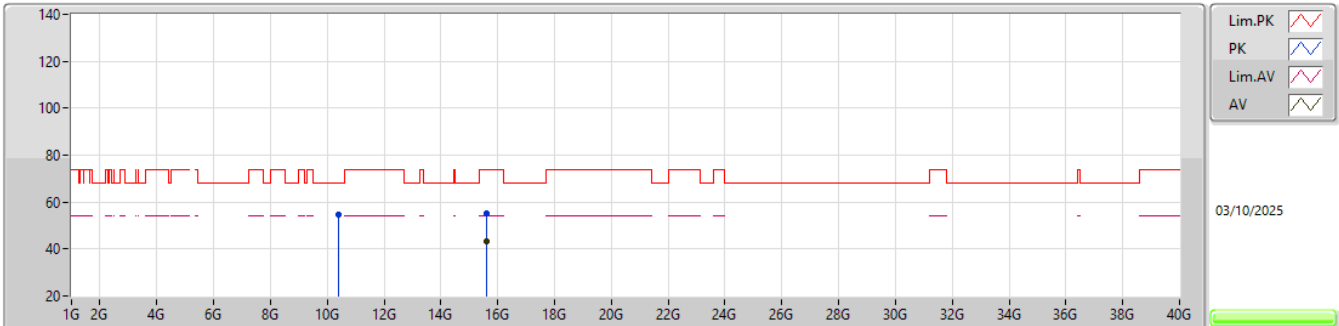


EUT_Y_4TX
Setting 34
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40635G	54.69	68.20	-13.51	49.74	3	Vertical	77	1.39	-	38.29	11.99	45.33			
PK	15.62325G	55.06	74.00	-18.94	45.94	3	Vertical	359	1.80	-	37.75	14.50	43.13			
AV	15.60765G	43.51	54.00	-10.49	34.33	3	Vertical	359	1.80	-	37.78	14.49	43.09			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

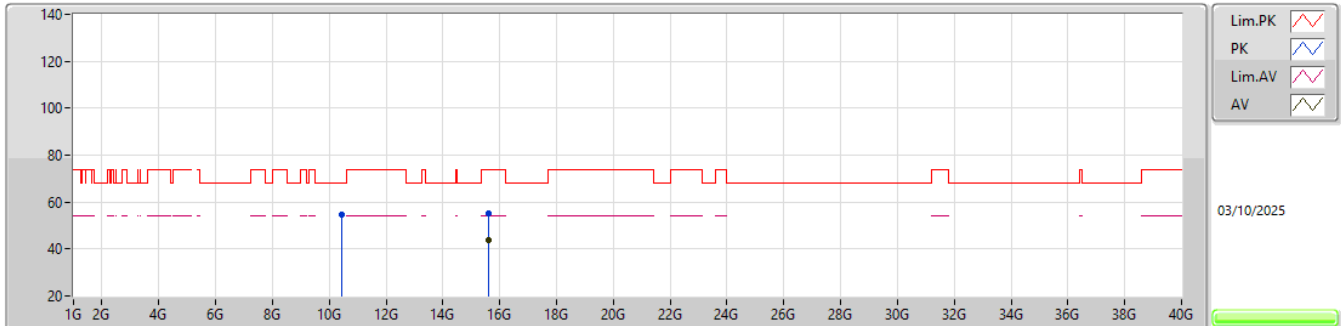


EUT_Y_4TX
Setting 34
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.43785G	54.52	68.20	-13.68	49.62	3	Horizontal	213	2.50	-	38.22	12.00	45.32			
PK	15.62825G	55.01	74.00	-18.99	45.90	3	Horizontal	198	3.00	-	37.74	14.51	43.14			
AV	15.616G	43.64	54.00	-10.36	34.48	3	Horizontal	198	3.00	-	37.77	14.50	43.11			

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5290MHz_TX

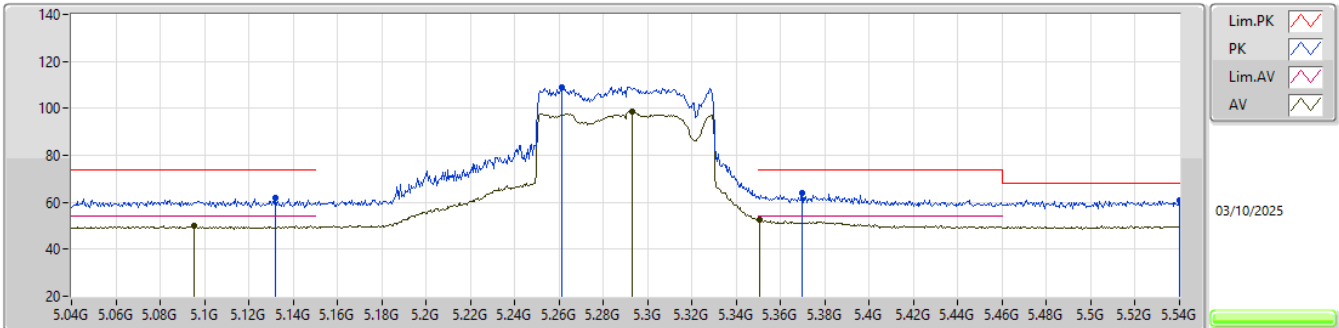EUT_Y_4TX
Setting 32
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.132G	61.75	74.00	-12.25	50.73	3	Vertical	162	1.36	-	33.56	7.58	30.12			
AV	5.0955G	50.10	54.00	-3.90	39.14	3	Vertical	162	1.36	-	33.49	7.57	30.10			
PK	5.2615G	109.06	Inf	-Inf	97.89	3	Vertical	162	1.36	-	33.72	7.64	30.19			
AV	5.293G	98.53	Inf	-Inf	87.28	3	Vertical	162	1.36	-	33.79	7.66	30.20			
PK	5.3695G	63.77	74.00	-10.23	52.39	3	Vertical	162	1.36	-	33.90	7.72	30.24			
AV	5.3505G	52.44	54.00	-1.56	41.07	3	Vertical	162	1.36	-	33.90	7.70	30.23			
PK	5.54G	61.12	68.20	-7.08	49.52	3	Vertical	162	1.36	-	34.08	7.82	30.30			

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5290MHz_TX

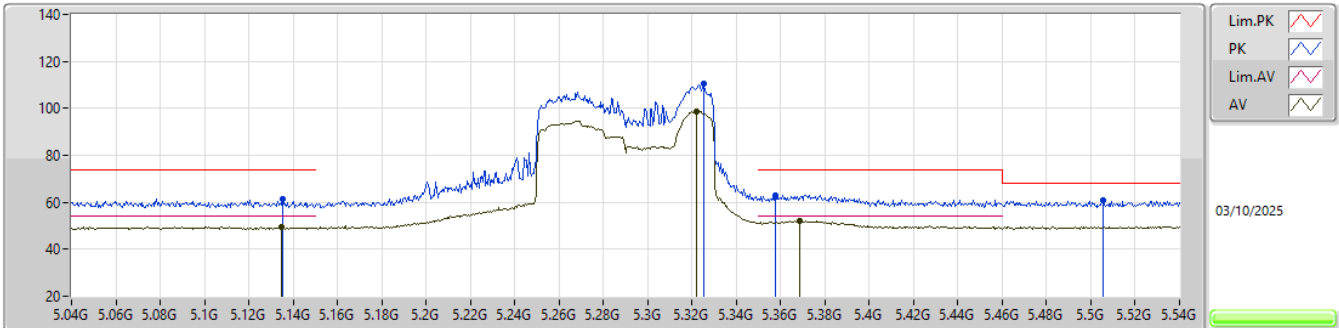EUT_Y_4TX
Setting 32
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1355G	61.33	74.00	-12.67	50.30	3	Horizontal	192	1.35	-	33.57	7.58	30.12
AV	5.135G	49.73	54.00	-4.27	38.70	3	Horizontal	192	1.35	-	33.57	7.58	30.12
PK	5.3255G	110.31	Inf	-Inf	99.00	3	Horizontal	192	1.35	-	33.85	7.68	30.22
AV	5.322G	98.69	Inf	-Inf	87.39	3	Horizontal	192	1.35	-	33.84	7.68	30.22
PK	5.3575G	63.08	74.00	-10.92	51.71	3	Horizontal	192	1.35	-	33.90	7.71	30.24
AV	5.3685G	52.10	54.00	-1.90	40.72	3	Horizontal	192	1.35	-	33.90	7.72	30.24
PK	5.5055G	60.72	68.20	-7.48	49.22	3	Horizontal	192	1.35	-	34.01	7.80	30.31

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5290MHz_TX

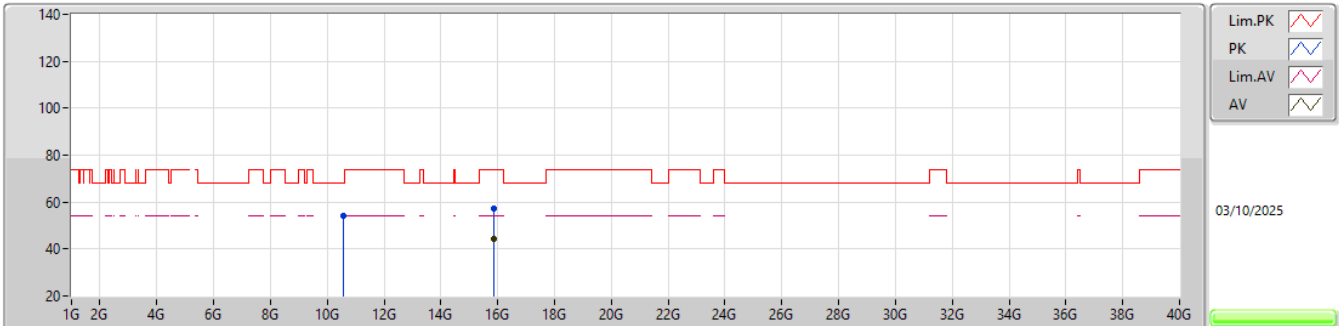EUT_Y_4TX
Setting 32
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5713G	53.96	68.20	-14.24	48.99	3	Vertical	19	1.80	-	38.34	12.07	45.44			
PK	15.88375G	57.09	74.00	-16.91	48.39	3	Vertical	307	1.80	-	37.64	14.73	43.67			
AV	15.88645G	44.54	54.00	-9.46	35.83	3	Vertical	307	1.80	-	37.65	14.73	43.67			

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5290MHz_TX

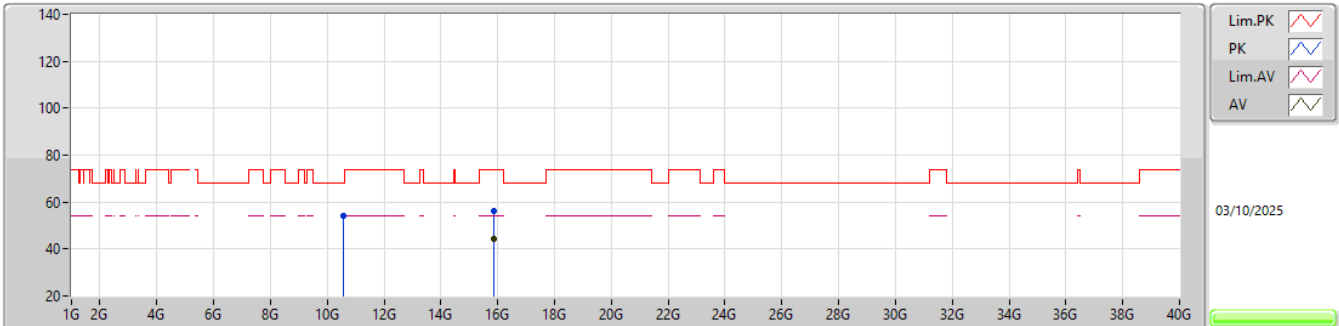EUT_Y_4TX
Setting 32
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5886G	54.06	68.20	-14.14	49.08	3	Horizontal	217	1.89	-	38.38	12.08	45.48			
PK	15.87725G	56.22	74.00	-17.78	47.54	3	Horizontal	225	1.80	-	37.61	14.72	43.65			
AV	15.872G	44.07	54.00	-9.93	35.40	3	Horizontal	225	1.80	-	37.59	14.72	43.64			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5530MHz_TX

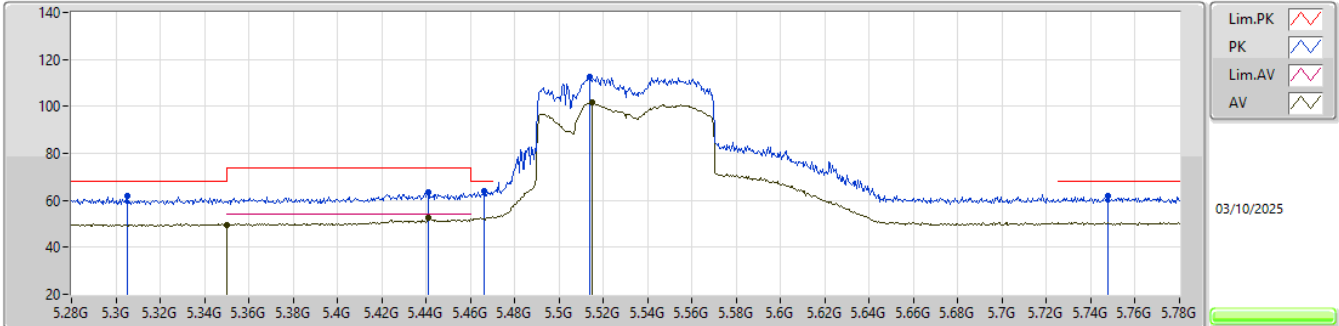


EUT_Y_4TX
Setting 36
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.305G	61.89	68.20	-6.31	50.62	3	Vertical	349	1.57	-	33.81	7.67	30.21			
AV	5.35G	49.30	54.00	-4.70	37.93	3	Vertical	349	1.57	-	33.90	7.70	30.23			
PK	5.441G	63.67	74.00	-10.33	52.29	3	Vertical	349	1.57	-	33.90	7.76	30.28			
AV	5.441G	52.66	54.00	-1.34	41.28	3	Vertical	349	1.57	-	33.90	7.76	30.28			
PK	5.466G	64.15	68.20	-4.05	52.73	3	Vertical	349	1.57	-	33.93	7.78	30.29			
PK	5.514G	112.48	Inf	-Inf	100.94	3	Vertical	349	1.57	-	34.03	7.81	30.30			
AV	5.515G	101.79	Inf	-Inf	90.25	3	Vertical	349	1.57	-	34.03	7.81	30.30			
PK	5.7475G	61.73	68.20	-6.47	49.83	3	Vertical	349	1.57	-	34.00	8.12	30.22			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5530MHz_TX

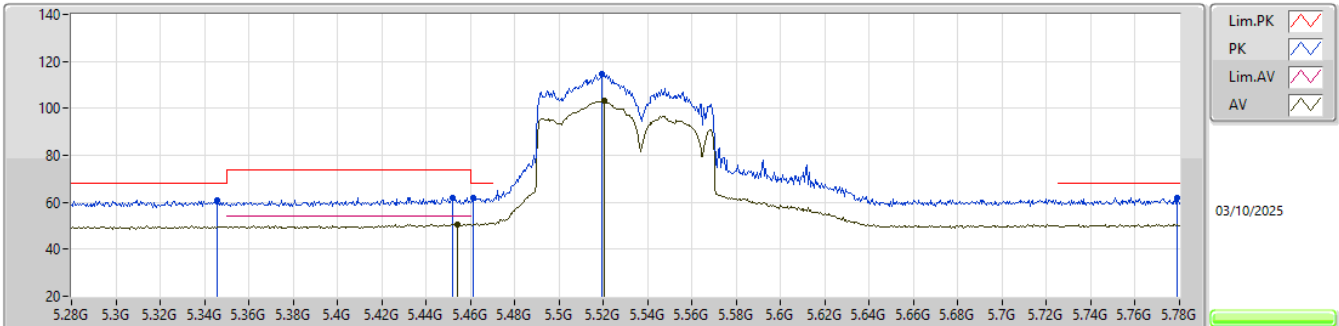


EUT_Y_4TX
Setting 36
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3455G	60.97	68.20	-7.23	49.61	3	Horizontal	253	1.98	-	33.89	7.70	30.23			
PK	5.452G	62.08	74.00	-11.92	50.70	3	Horizontal	253	1.98	-	33.90	7.77	30.29			
AV	5.454G	50.60	54.00	-3.40	39.21	3	Horizontal	253	1.98	-	33.91	7.77	30.29			
PK	5.461G	61.74	68.20	-6.46	50.33	3	Horizontal	253	1.98	-	33.92	7.78	30.29			
PK	5.5195G	114.83	Inf	-Inf	103.28	3	Horizontal	253	1.98	-	34.04	7.81	30.30			
AV	5.5205G	103.06	Inf	-Inf	91.51	3	Horizontal	253	1.98	-	34.04	7.81	30.30			
PK	5.779G	62.01	68.20	-6.19	50.05	3	Horizontal	253	1.98	-	34.00	8.17	30.21			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5530MHz_TX

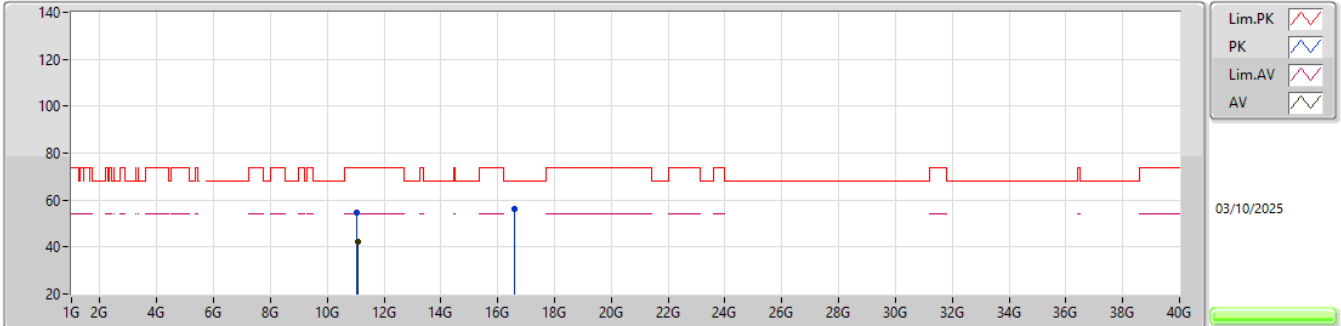


EUT_Y_4TX
Setting 36
02-D-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0422G	54.43	74.00	-19.57	49.85	3	Vertical	7	1.46	-	38.48	12.31	46.21			
AV	11.07825G	42.05	54.00	-11.95	37.35	3	Vertical	7	1.46	-	38.56	12.32	46.18			
PK	16.5992G	56.19	68.20	-12.01	46.37	3	Vertical	186	1.80	-	39.49	14.95	44.62			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5530MHz_TX

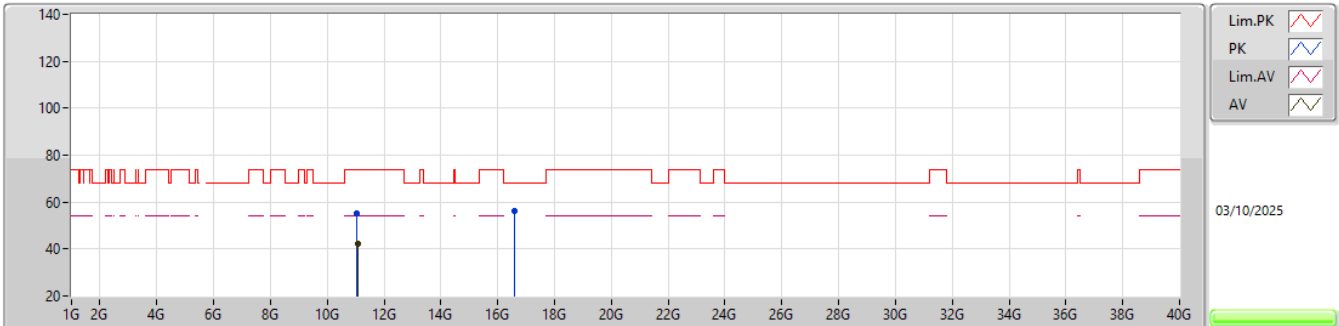EUT_Y_4TX
Setting 36
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05795G	54.93	74.00	-19.07	50.30	3	Horizontal	72	1.80	-	38.52	12.31	46.20			
AV	11.0659G	42.39	54.00	-11.61	37.73	3	Horizontal	72	1.80	-	38.53	12.32	46.19			
PK	16.6052G	56.12	68.20	-12.08	46.27	3	Horizontal	202	2.39	-	39.53	14.95	44.63			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5610MHz_TX

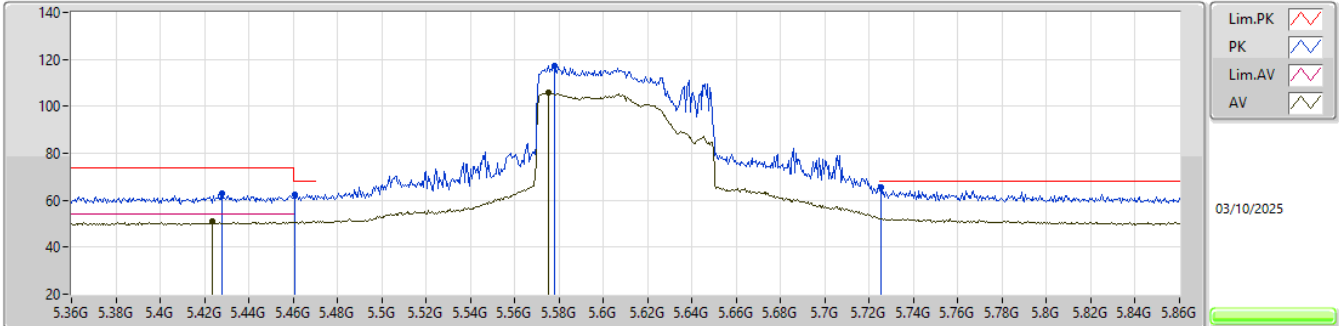


EUT_Y_4TX
Setting 38
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.428G	63.05	74.00	-10.95	51.66	3	Vertical	89	2.55	-	33.90	7.76	30.27
AV	5.4235G	50.78	54.00	-3.22	39.40	3	Vertical	89	2.55	-	33.90	7.75	30.27
PK	5.4605G	62.43	68.20	-5.77	51.02	3	Vertical	89	2.55	-	33.92	7.78	30.29
PK	5.578G	117.47	Inf	-Inf	105.86	3	Vertical	89	2.55	-	34.04	7.85	30.28
AV	5.575G	105.68	Inf	-Inf	94.06	3	Vertical	89	2.55	-	34.05	7.85	30.28
PK	5.7255G	65.38	68.20	-2.82	53.53	3	Vertical	89	2.55	-	34.00	8.08	30.23

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5610MHz_TX

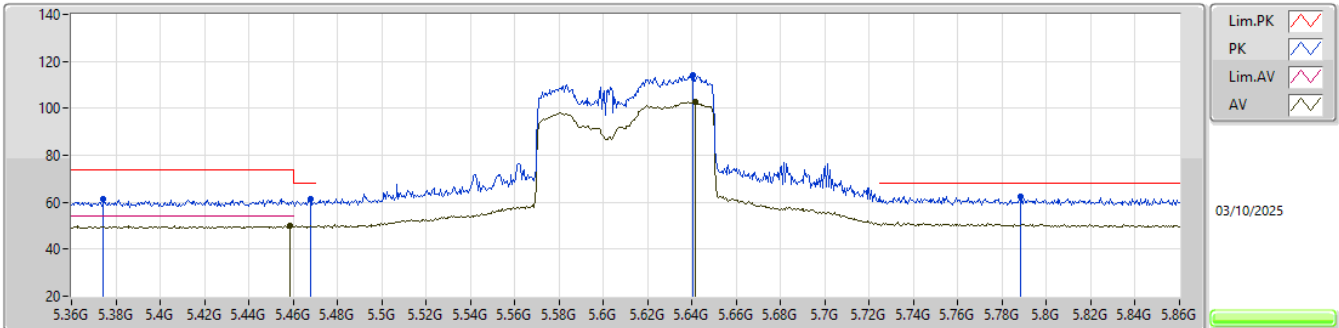


EUT_Y_4TX
Setting 38
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3745G	61.53	74.00	-12.47	50.15	3	Horizontal	104	2.23	-	33.90	7.72	30.24			
PK	5.468G	61.21	68.20	-6.99	49.78	3	Horizontal	104	2.23	-	33.94	7.78	30.29			
AV	5.4585G	49.93	54.00	-4.07	38.52	3	Horizontal	104	2.23	-	33.92	7.78	30.29			
PK	5.6405G	114.03	Inf	-Inf	102.36	3	Horizontal	104	2.23	-	34.00	7.93	30.26			
AV	5.6415G	102.55	Inf	-Inf	90.88	3	Horizontal	104	2.23	-	34.00	7.93	30.26			
PK	5.7885G	62.36	68.20	-5.84	50.38	3	Horizontal	104	2.23	-	34.00	8.19	30.21			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5610MHz_TX

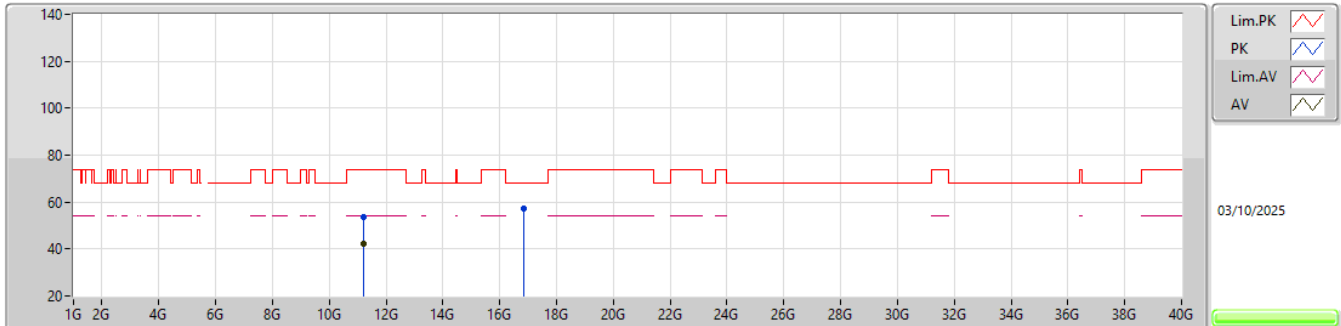EUT_Y_4TX
Setting 38
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.2288G	53.83	74.00	-20.17	48.97	3	Vertical	177	1.70	-	38.50	12.40	46.04			
AV	11.21845G	42.35	54.00	-11.65	37.50	3	Vertical	177	1.70	-	38.50	12.40	46.05			
PK	16.84215G	57.13	68.20	-11.07	46.55	3	Vertical	201	2.48	-	40.38	15.00	44.80			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5610MHz_TX

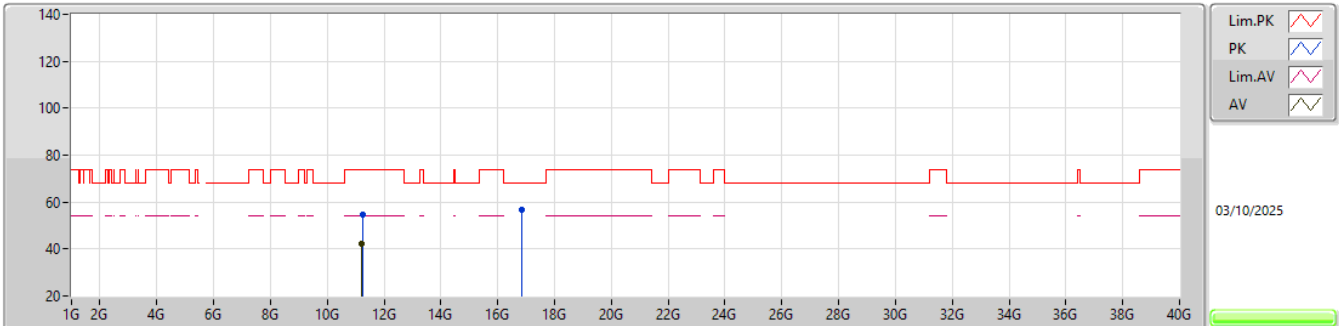EUT_Y_4TX
Setting 38
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.23895G	54.53	74.00	-19.47	49.65	3	Horizontal	268	2.34	-	38.50	12.41	46.03			
AV	11.222G	42.04	54.00	-11.96	37.19	3	Horizontal	268	2.34	-	38.50	12.40	46.05			
PK	16.8548G	56.76	68.20	-11.44	46.14	3	Horizontal	180	2.95	-	40.42	15.01	44.81			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

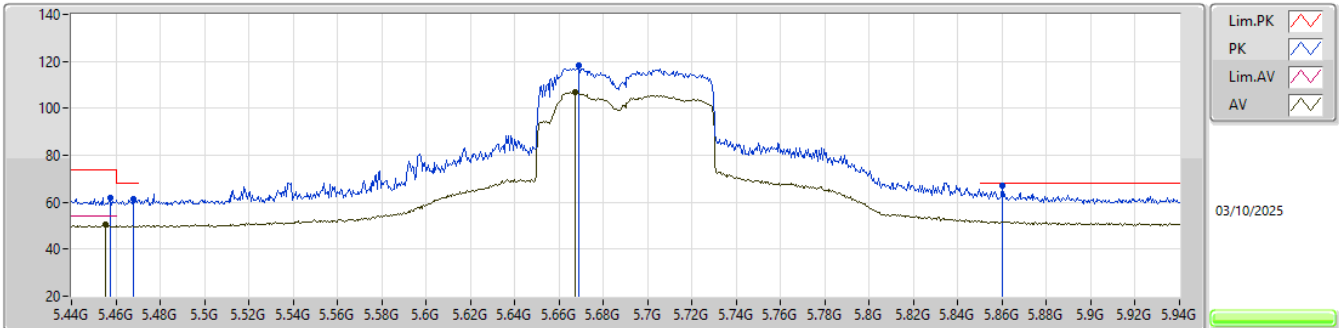


EUT Y_4TX
Setting 42
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4575G	61.98	74.00	-12.02	50.59	3	Vertical	74	2.03	-	33.91	7.77	30.29
AV	5.4555G	50.46	54.00	-3.54	39.07	3	Vertical	74	2.03	-	33.91	7.77	30.29
PK	5.468G	61.26	68.20	-6.94	49.83	3	Vertical	74	2.03	-	33.94	7.78	30.29
PK	5.669G	118.10	Inf	-Inf	106.37	3	Vertical	74	2.03	-	34.00	7.98	30.25
AV	5.667G	106.92	Inf	-Inf	95.19	3	Vertical	74	2.03	-	34.00	7.98	30.25
PK	5.86G	67.07	68.20	-1.13	55.13	3	Vertical	74	2.03	-	33.94	8.18	30.18

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

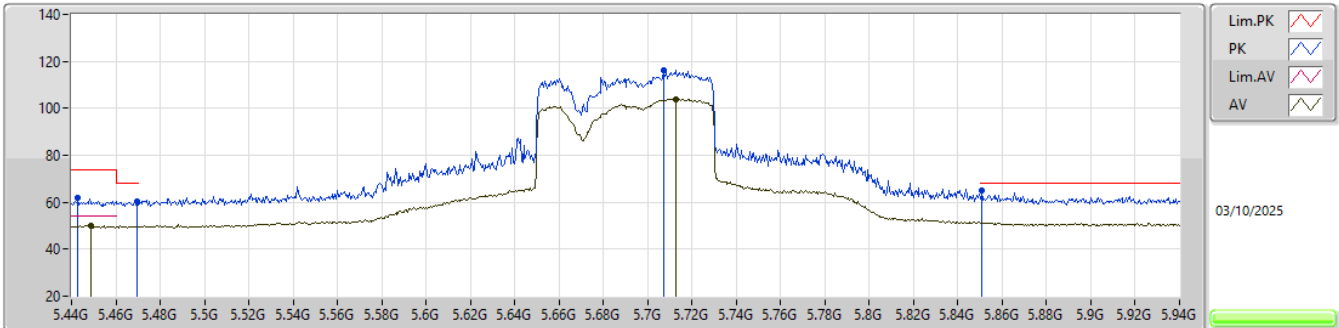


EUT Y_4TX
Setting 42
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.443G	61.76	74.00	-12.24	50.37	3	Horizontal	102	2.01	-	33.90	7.77	30.28
AV	5.449G	50.10	54.00	-3.90	38.71	3	Horizontal	102	2.01	-	33.90	7.77	30.28
PK	5.4695G	60.27	68.20	-7.93	48.84	3	Horizontal	102	2.01	-	33.94	7.78	30.29
PK	5.707G	116.37	Inf	-Inf	104.56	3	Horizontal	102	2.01	-	34.00	8.05	30.24
AV	5.713G	104.01	Inf	-Inf	92.18	3	Horizontal	102	2.01	-	34.00	8.06	30.23
PK	5.851G	64.90	68.20	-3.30	52.99	3	Horizontal	102	2.01	-	33.90	8.19	30.18

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

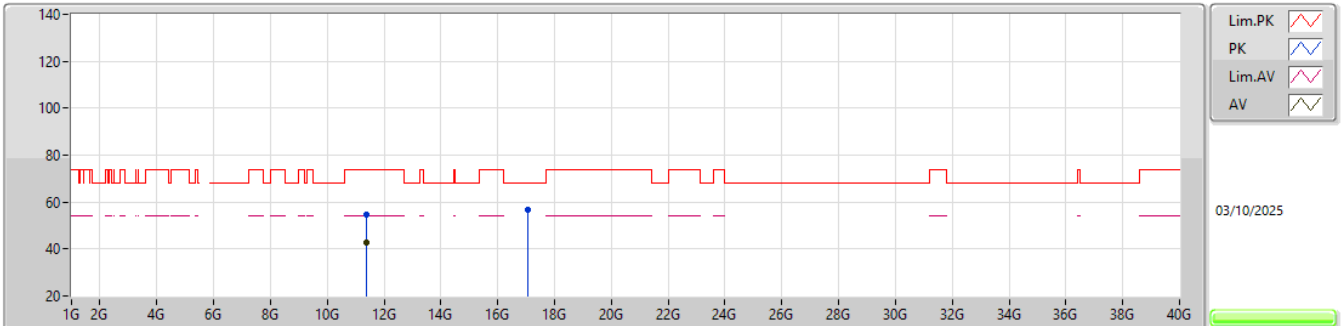


EUT_Y_4TX
Setting 42
02-D-E-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.3698G	54.73	74.00	-19.27	49.48	3	Vertical	222	1.26	-	38.70	12.47	45.92			
AV	11.384G	42.54	54.00	-11.46	37.26	3	Vertical	222	1.26	-	38.70	12.48	45.90			
PK	17.0459G	56.66	68.20	-11.54	45.28	3	Vertical	321	1.80	-	41.29	15.04	44.95			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5690MHz Straddle 5.47-5.725GHz_TX

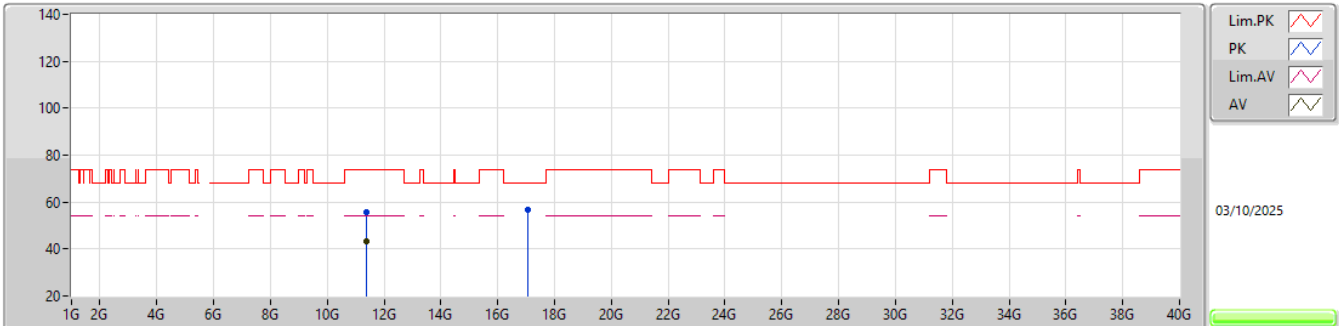EUT_Y_4TX
Setting 42
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3686G	55.58	74.00	-18.42	50.33	3	Horizontal	322	1.80	-	38.70	12.47	45.92			
AV	11.37975G	43.08	54.00	-10.92	37.81	3	Horizontal	322	1.80	-	38.70	12.48	45.91			
PK	17.07695G	56.59	68.20	-11.61	45.16	3	Horizontal	262	1.83	-	41.35	15.05	44.97			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5775MHz_TX

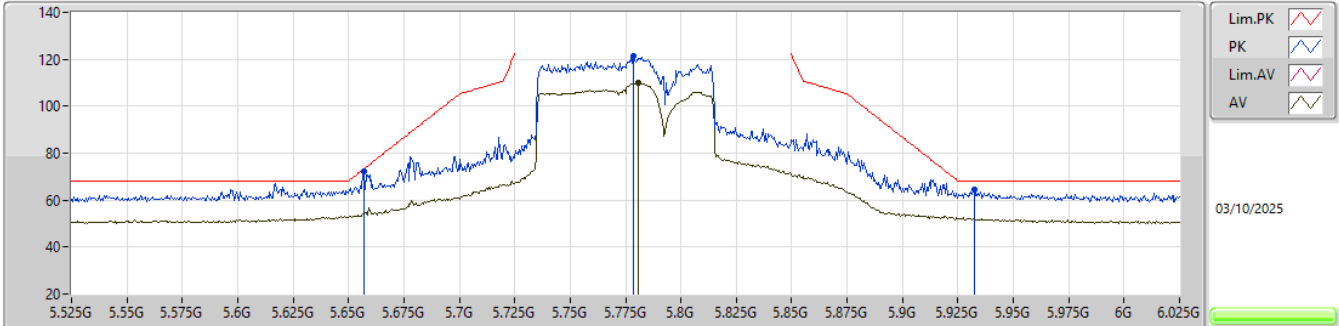


EUT_Y_4TX
Setting 44
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.657G	72.25	73.38	-1.13	60.54	3	Vertical	108	1.66	-	34.00	7.96	30.25			
PK	5.7785G	121.44	Inf	-Inf	109.48	3	Vertical	108	1.66	-	34.00	8.17	30.21			
AV	5.7805G	110.10	Inf	-Inf	98.13	3	Vertical	108	1.66	-	34.00	8.18	30.21			
PK	5.9325G	64.42	68.20	-3.78	52.26	3	Vertical	108	1.66	-	34.16	8.15	30.15			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5775MHz_TX

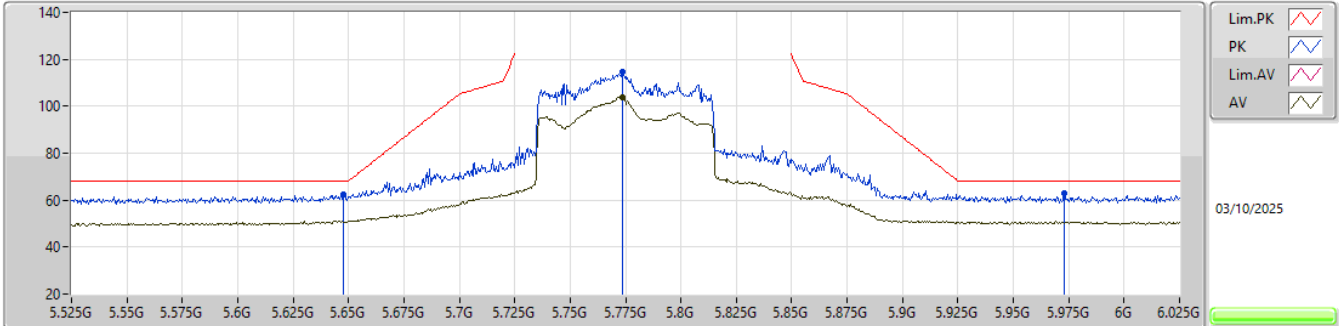


EUT_Y_4TX
Setting 44
02-D-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6475G	62.51	68.20	-5.69	50.83	3	Horizontal	74	1.31	-	34.00	7.94	30.26			
PK	5.7735G	114.74	Inf	-Inf	102.79	3	Horizontal	74	1.31	-	34.00	8.16	30.21			
AV	5.7735G	103.87	Inf	-Inf	91.92	3	Horizontal	74	1.31	-	34.00	8.16	30.21			
PK	5.973G	62.73	68.20	-5.47	50.49	3	Horizontal	74	1.31	-	34.25	8.13	30.14			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5775MHz_TX

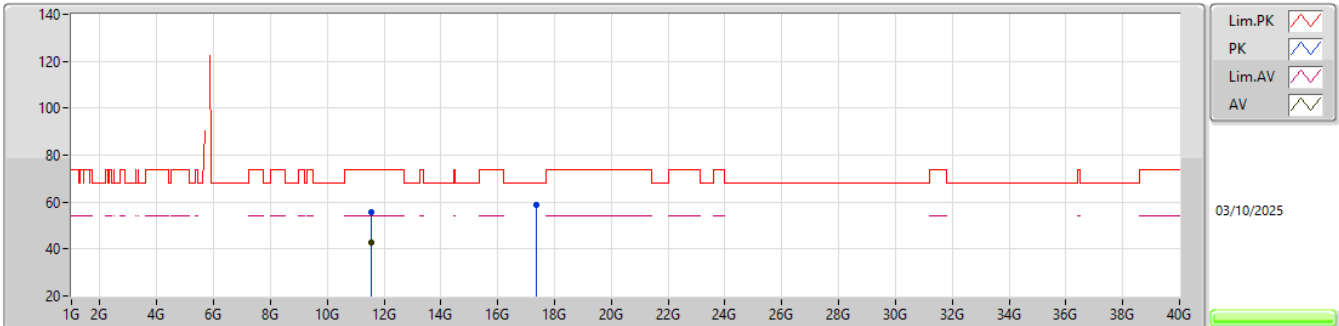EUT_Y_4TX
Setting 44
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.56205G	55.45	74.00	-18.55	49.58	3	Vertical	247	1.80	-	39.12	12.57	45.82			
AV	11.54995G	42.82	54.00	-11.18	36.98	3	Vertical	247	1.80	-	39.10	12.56	45.82			
PK	17.34815G	58.98	68.20	-9.22	46.17	3	Vertical	94	1.71	-	42.89	15.11	45.19			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5775MHz_TX

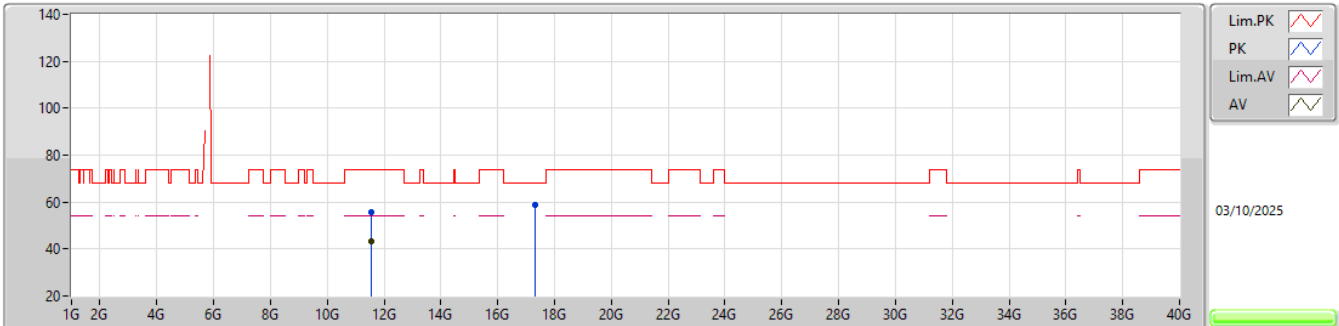EUT Y_4TX
Setting 44
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5572G	55.88	74.00	-18.12	50.02	3	Horizontal	109	1.84	-	39.11	12.57	45.82			
AV	11.5601G	43.10	54.00	-10.90	37.23	3	Horizontal	109	1.84	-	39.12	12.57	45.82			
PK	17.3388G	59.03	68.20	-9.17	46.30	3	Horizontal	4	1.80	-	42.81	15.10	45.18			

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

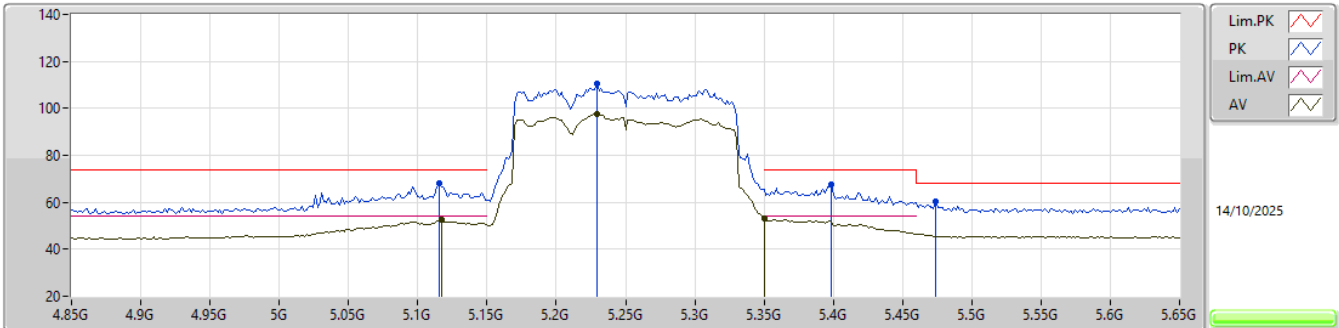


EUT_Y_4TX
Setting 32
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1156G	68.02	74.00	-5.98	63.08	3	Vertical	129	2.14	-	31.76	6.89	33.71			
AV	5.1172G	52.36	54.00	-1.64	47.41	3	Vertical	129	2.14	-	31.77	6.89	33.71			
PK	5.2292G	110.44	Inf	-Inf	105.82	3	Vertical	129	2.14	-	31.42	6.94	33.74			
AV	5.2292G	97.74	Inf	-Inf	93.12	3	Vertical	129	2.14	-	31.42	6.94	33.74			
PK	5.3988G	67.51	74.00	-6.49	62.88	3	Vertical	129	2.14	-	31.40	7.01	33.78			
AV	5.35G	52.93	54.00	-1.07	48.41	3	Vertical	129	2.14	-	31.30	6.99	33.77			
PK	5.474G	60.31	68.20	-7.89	55.38	3	Vertical	129	2.14	-	31.60	7.13	33.80			

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

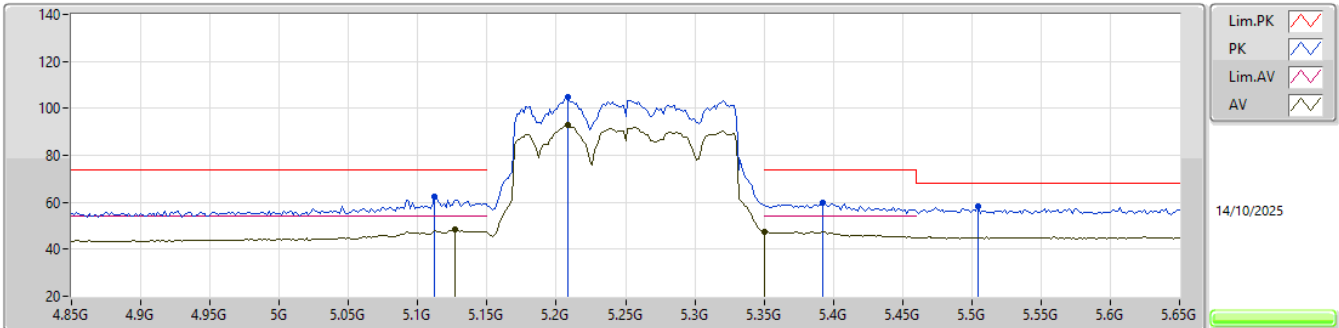


EUT_Y_4TX
Setting 32
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1124G	62.38	74.00	-11.62	57.45	3	Horizontal	205	1.52	-	31.75	6.89	33.71			
AV	5.1268G	48.60	54.00	-5.40	43.60	3	Horizontal	205	1.52	-	31.81	6.90	33.71			
PK	5.2084G	104.96	Inf	-Inf	100.21	3	Horizontal	205	1.52	-	31.55	6.93	33.73			
AV	5.2084G	92.89	Inf	-Inf	88.14	3	Horizontal	205	1.52	-	31.55	6.93	33.73			
PK	5.3924G	59.97	74.00	-14.03	55.36	3	Horizontal	205	1.52	-	31.38	7.01	33.78			
AV	5.35G	47.64	54.00	-6.36	43.12	3	Horizontal	205	1.52	-	31.30	6.99	33.77			
PK	5.5044G	58.13	68.20	-10.07	53.06	3	Horizontal	205	1.52	-	31.70	7.18	33.81			

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

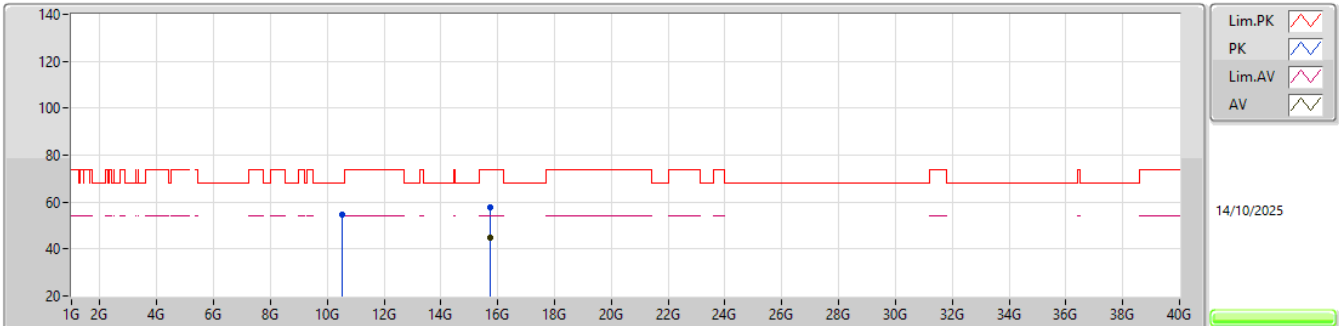


EUT_Y_4TX
Setting 32
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5051G	54.50	68.20	-13.70	38.19	3	Vertical	83	1.80	-	39.89	10.72	34.30			
PK	15.7536G	57.74	74.00	-16.26	39.90	3	Vertical	316	1.80	-	38.57	13.73	34.46			
AV	15.7449G	44.87	54.00	-9.13	27.02	3	Vertical	316	1.80	-	38.59	13.73	34.47			

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

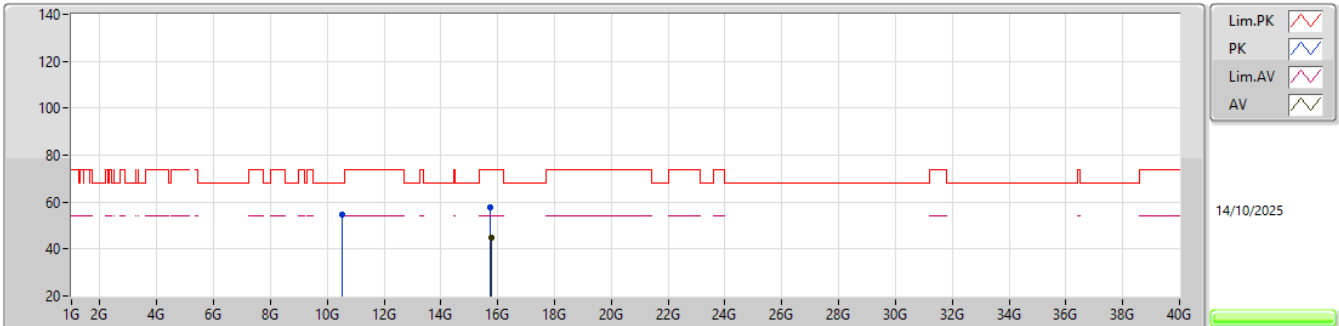


EUT_Y_4TX
Setting 32
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5118G	54.41	68.20	-13.79	38.11	3	Horizontal	107	1.05	-	39.88	10.72	34.30			
PK	15.7354G	57.52	74.00	-16.48	39.70	3	Horizontal	62.1	1.80	-	38.57	13.72	34.47			
AV	15.7603G	44.92	54.00	-9.08	27.12	3	Horizontal	62.1	1.80	-	38.52	13.74	34.46			

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5570MHz_TX

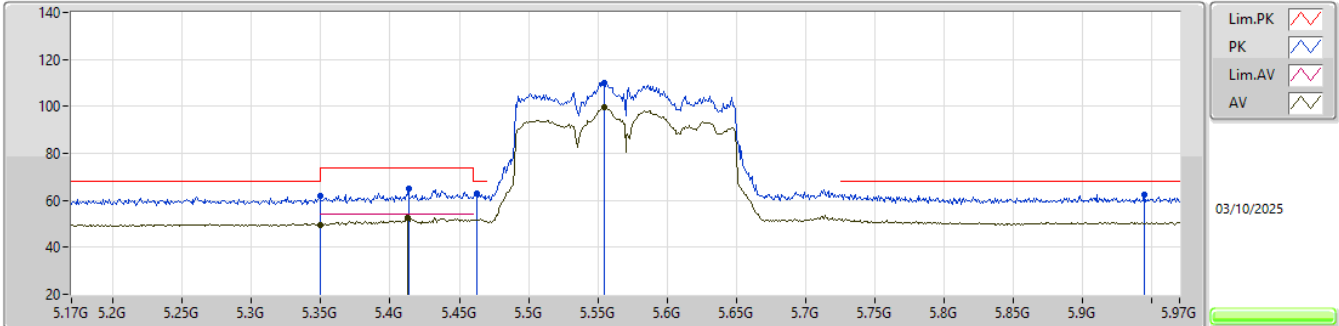


EUT_V_4TX
Setting 32
02-D-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.3492G	61.80	68.20	-6.40	50.43	3	Vertical	110	2.35	-	33.90	7.70	30.23					
AV	5.35G	49.72	54.00	-4.28	38.35	3	Vertical	110	2.35	-	33.90	7.70	30.23					
PK	5.4132G	65.08	74.00	-8.92	53.69	3	Vertical	110	2.35	-	33.90	7.75	30.26					
AV	5.4124G	52.53	54.00	-1.47	41.14	3	Vertical	110	2.35	-	33.90	7.75	30.26					
PK	5.4628G	63.05	68.20	-5.15	51.63	3	Vertical	110	2.35	-	33.93	7.78	30.29					
PK	5.5548G	110.16	Inf	-Inf	98.53	3	Vertical	110	2.35	-	34.09	7.83	30.29					
AV	5.5548G	99.53	Inf	-Inf	87.90	3	Vertical	110	2.35	-	34.09	7.83	30.29					
PK	5.9444G	62.55	68.20	-5.65	50.36	3	Vertical	110	2.35	-	34.19	8.15	30.15					

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5570MHz_TX

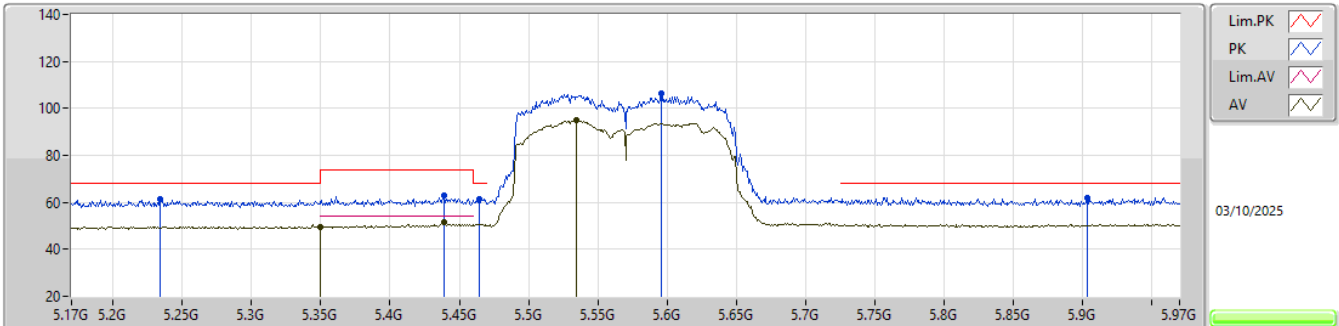


EUT_Y_4TX
Setting 32
02-D-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.234G	61.26	68.20	-6.94	50.11	3	Horizontal	249	2.58	-	33.70	7.62	30.17			
PK	5.4388G	62.73	74.00	-11.27	51.35	3	Horizontal	249	2.58	-	33.90	7.76	30.28			
AV	5.35G	49.49	54.00	-4.51	38.12	3	Horizontal	249	2.58	-	33.90	7.70	30.23			
AV	5.4388G	51.46	54.00	-2.54	40.08	3	Horizontal	249	2.58	-	33.90	7.76	30.28			
PK	5.4644G	61.57	68.20	-6.63	50.15	3	Horizontal	249	2.58	-	33.93	7.78	30.29			
PK	5.5956G	106.41	Inf	-Inf	94.82	3	Horizontal	249	2.58	-	34.01	7.86	30.28			
AV	5.5348G	95.06	Inf	-Inf	83.47	3	Horizontal	249	2.58	-	34.07	7.82	30.30			
PK	5.9036G	62.11	68.20	-6.09	50.00	3	Horizontal	249	2.58	-	34.11	8.16	30.16			

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX


5570MHz_TX

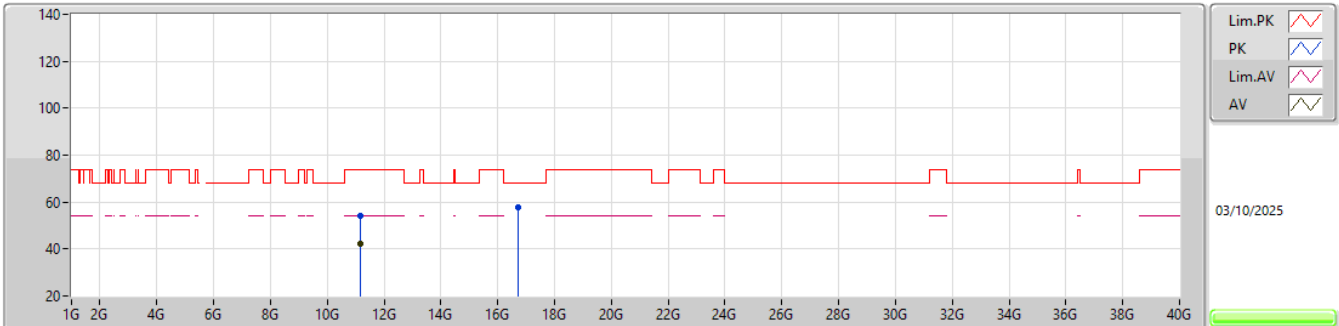EUT_Y_4TX
Setting 32
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.1648G	54.32	74.00	-19.68	49.55	3	Vertical	147	2.96	-	38.50	12.37	46.10			
AV	11.15976G	42.02	54.00	-11.98	37.26	3	Vertical	147	2.96	-	38.50	12.37	46.11			
PK	16.70344G	57.80	68.20	-10.40	47.62	3	Vertical	39	1.80	-	39.91	14.97	44.70			

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5570MHz_TX

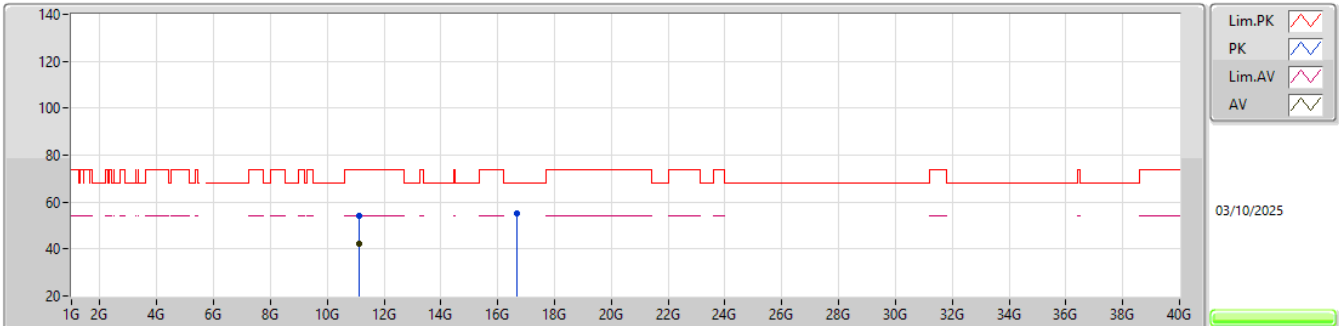EUT_Y_4TX
Setting 32
02-D-E-3


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.1203G	53.98	74.00	-20.02	49.21	3	Horizontal	19	1.80	-	38.56	12.35	46.14			
AV	11.1287G	42.00	54.00	-12.00	37.24	3	Horizontal	19	1.80	-	38.54	12.35	46.13			
PK	16.69392G	55.42	68.20	-12.78	45.25	3	Horizontal	57	2.55	-	39.89	14.97	44.69			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	1.74255G	36.24	54.00	-17.76	Vertical

Mode 1

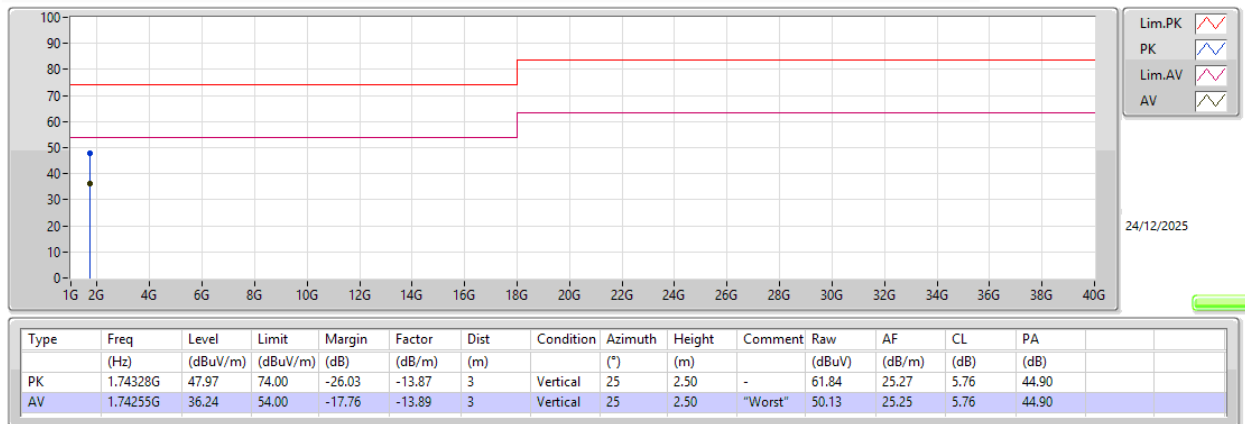

Mode 1

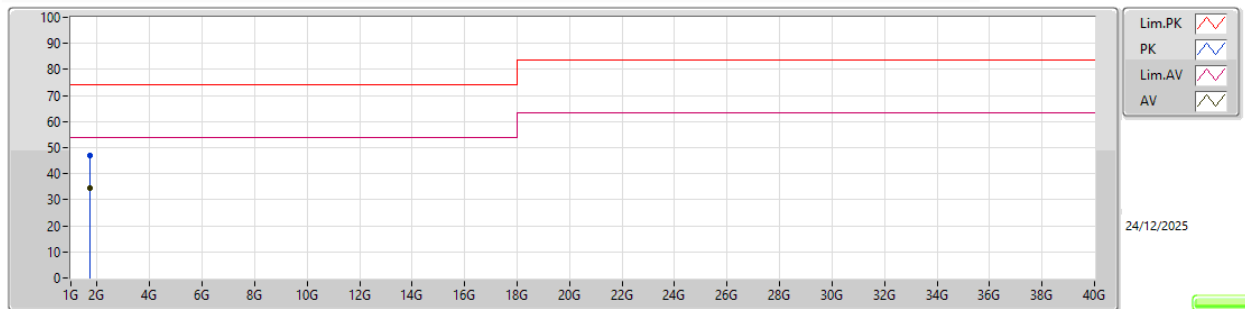

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	1.74162G	46.95	74.00	-27.05	-13.92	3	Horizontal	125	2.50	-	60.87	25.23	5.75	44.90		
AV	1.73964G	34.54	54.00	-19.46	-13.95	3	Horizontal	125	2.50	"Worst"	48.49	25.20	5.75	44.90		