


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5700MHz_TX

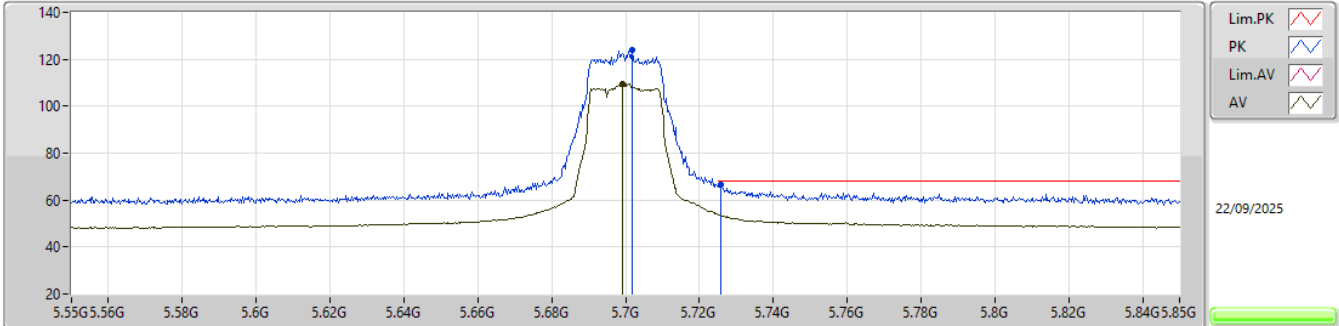


EUT Y_2TX
Setting 26
04-E-G-5-13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7018G	123.81	Inf	-Inf	126.50	3	Vertical	175	1.80	-	32.00	8.81	43.50			
AV	5.6991G	109.55	Inf	-Inf	112.25	3	Vertical	175	1.80	-	32.00	8.80	43.50			
PK	5.7258G	66.56	68.20	-1.64	69.15	3	Vertical	175	1.80	-	32.05	8.83	43.47			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5700MHz_TX

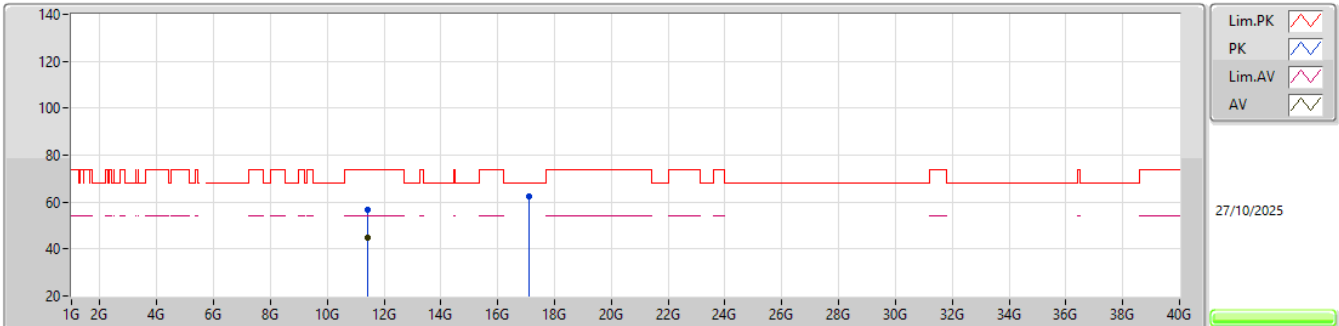


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40687G	56.50	74.00	-17.50	42.15	3	Vertical	45	1.80	-	38.71	10.72	35.08			
AV	11.40252G	44.65	54.00	-9.35	30.30	3	Vertical	45	1.80	-	38.71	10.72	35.08			
PK	17.09772G	62.24	68.20	-5.96	43.50	3	Vertical	186	1.43	-	40.10	12.88	34.24			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5700MHz_TX

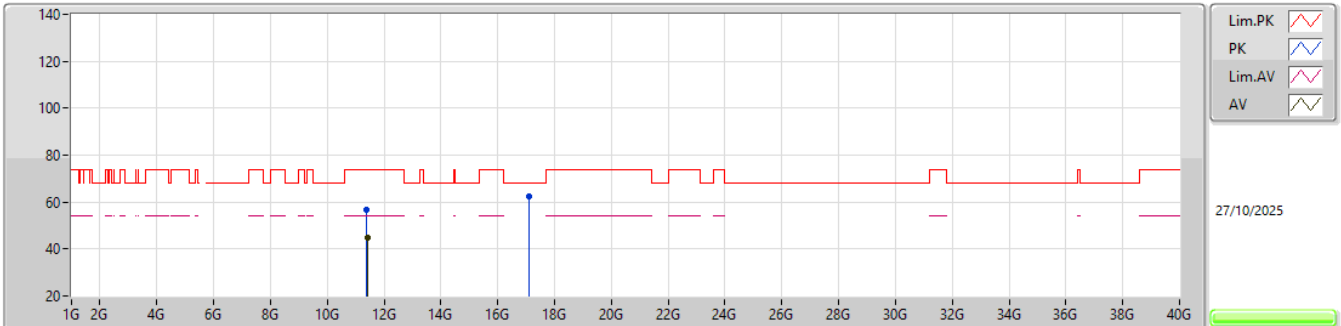


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.38926G	56.93	74.00	-17.07	42.62	3	Horizontal	338	1.68	-	38.68	10.71	35.08			
AV	11.40726G	44.67	54.00	-9.33	30.32	3	Horizontal	338	1.68	-	38.71	10.72	35.08			
PK	17.09496G	62.40	68.20	-5.80	43.67	3	Horizontal	15	1.80	-	40.09	12.88	34.24			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

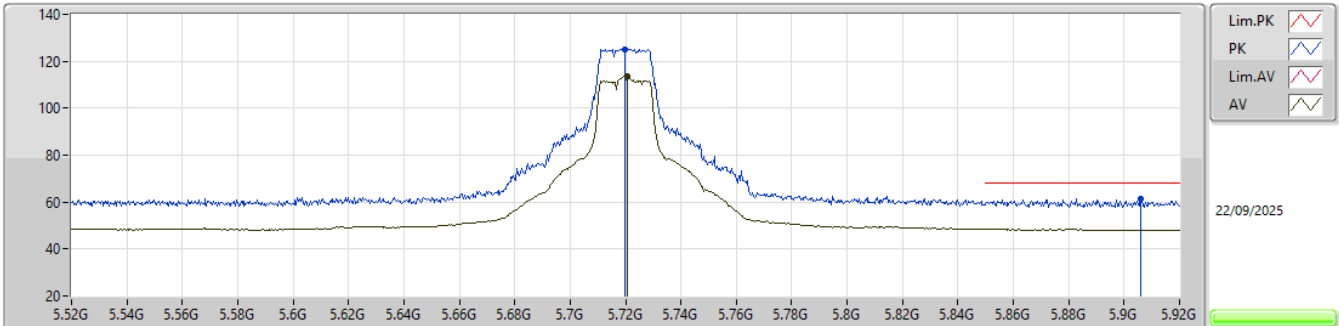


EUT Y_2TX
Setting 30
04-E-G-5-13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7196G	125.08	Inf	-Inf	127.69	3	Vertical	6	1.80	-	32.04	8.83	43.48			
AV	5.7208G	113.59	Inf	-Inf	116.20	3	Vertical	6	1.80	-	32.04	8.83	43.48			
PK	5.906G	61.62	68.20	-6.58	63.58	3	Vertical	6	1.80	-	32.30	9.03	43.29			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

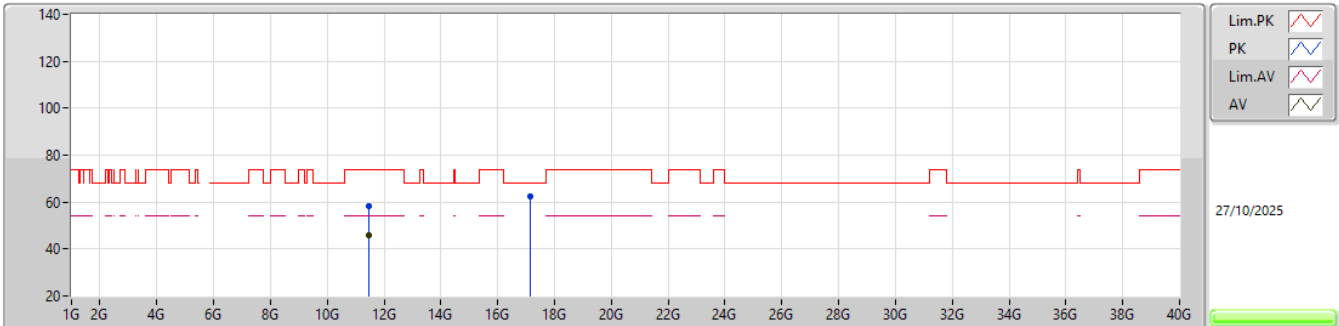


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44558G	58.10	74.00	-15.90	42.56	3	Vertical	269	1.80	-	39.90	10.73	35.09			
AV	11.44543G	45.92	54.00	-8.08	30.38	3	Vertical	269	1.80	-	39.90	10.73	35.09			
PK	17.16588G	62.55	68.20	-5.65	43.32	3	Vertical	48	1.80	-	40.46	12.91	34.14			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

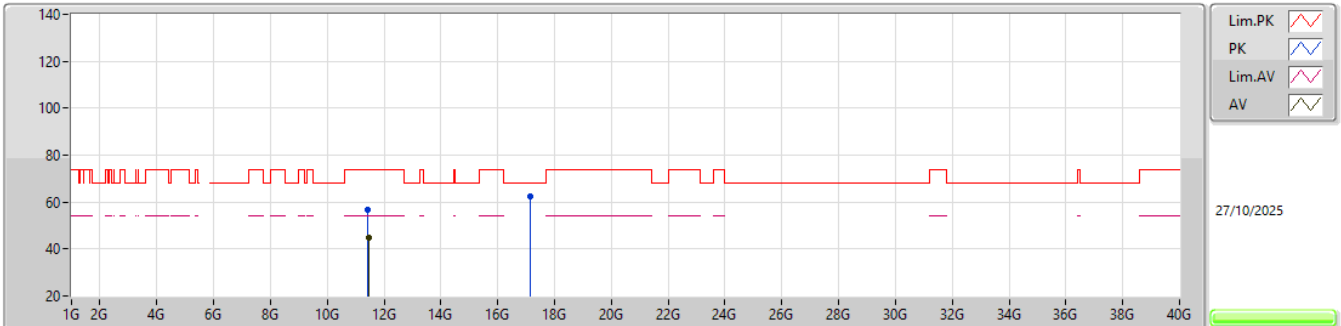


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.42824G	56.88	74.00	-17.12	42.48	3	Horizontal	347	1.80	-	38.76	10.72	35.08			
AV	11.45032G	44.75	54.00	-9.25	30.31	3	Horizontal	347	1.80	-	38.80	10.73	35.09			
PK	17.14653G	62.33	68.20	-5.87	43.31	3	Horizontal	175	3.00	-	40.29	12.90	34.17			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5745MHz_TX

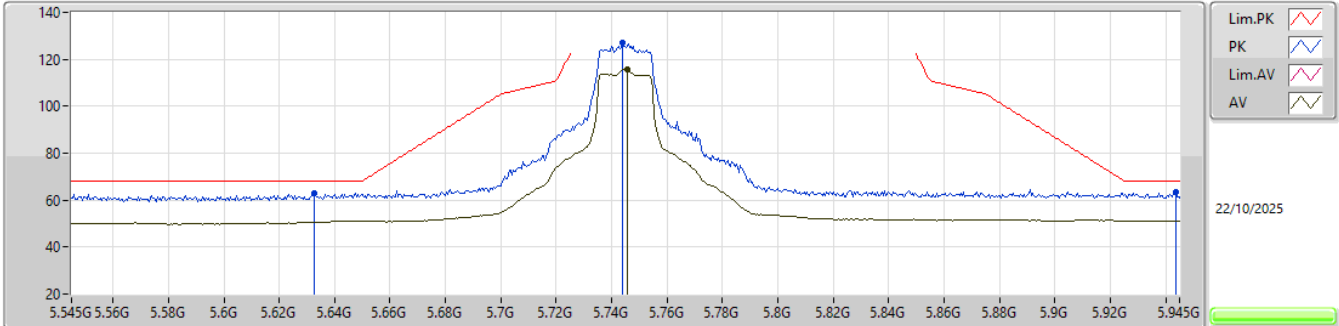


EUT Y_2TX
Setting 30
05-U-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6325G	63.01	68.20	-5.19	56.35	3	Vertical	13	1.80	-	32.97	8.61	34.92				
PK	5.744G	126.97	Inf	-Inf	119.51	3	Vertical	13	1.80	-	33.58	8.74	34.86				
AV	5.7455G	115.76	Inf	-Inf	108.30	3	Vertical	13	1.80	-	33.58	8.74	34.86				
PK	5.9435G	63.30	68.20	-4.90	54.91	3	Vertical	13	1.80	-	34.19	8.97	34.77				

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


5745MHz_TX

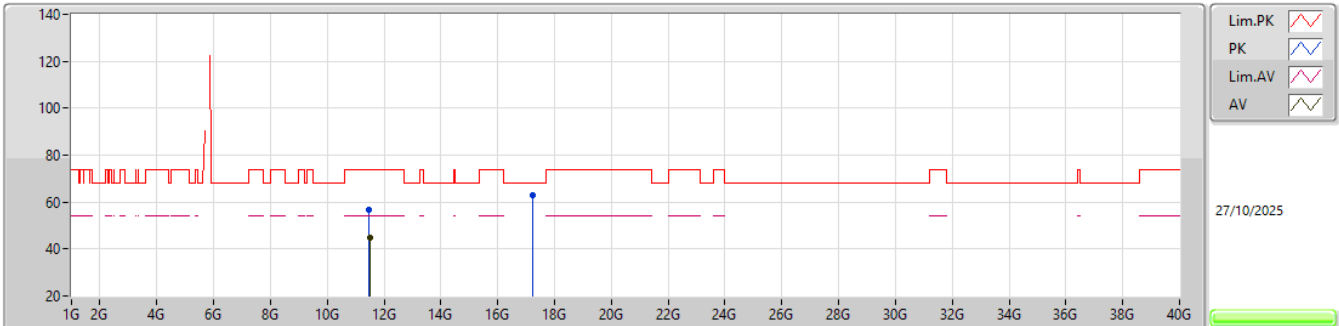
EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.47515G	56.48	74.00	-17.52	41.98	3	Vertical	335	2.59	-	38.85	10.74	35.09			
AV	11.50347G	44.85	54.00	-9.15	30.29	3	Vertical	335	2.59	-	38.91	10.75	35.10			
PK	17.24949G	62.69	68.20	-5.51	42.98	3	Vertical	172	1.80	-	40.80	12.94	34.03			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5745MHz_TX

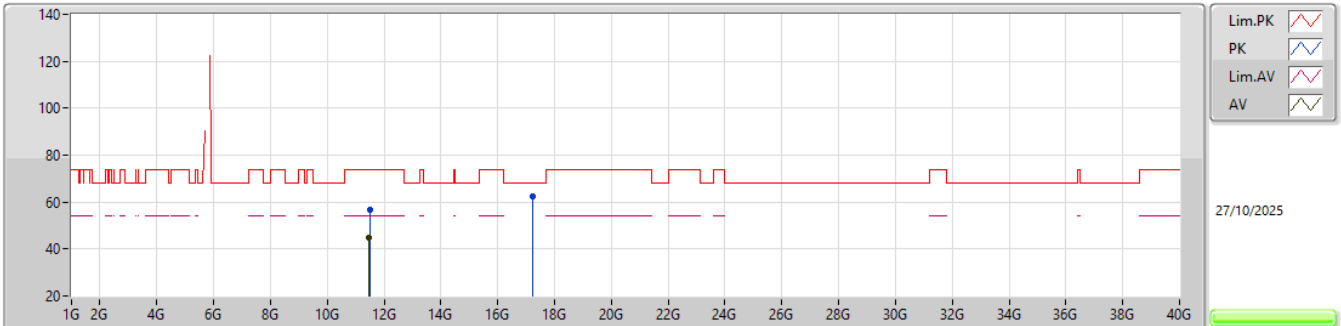


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50032G	56.61	74.00	-17.39	42.06	3	Horizontal	221	1.80	-	38.90	10.75	35.10			
AV	11.48415G	44.77	54.00	-9.23	30.26	3	Horizontal	221	1.80	-	38.87	10.74	35.10			
PK	17.24538G	62.55	68.20	-5.65	42.87	3	Horizontal	110	2.88	-	40.77	12.94	34.03			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5785MHz_TX

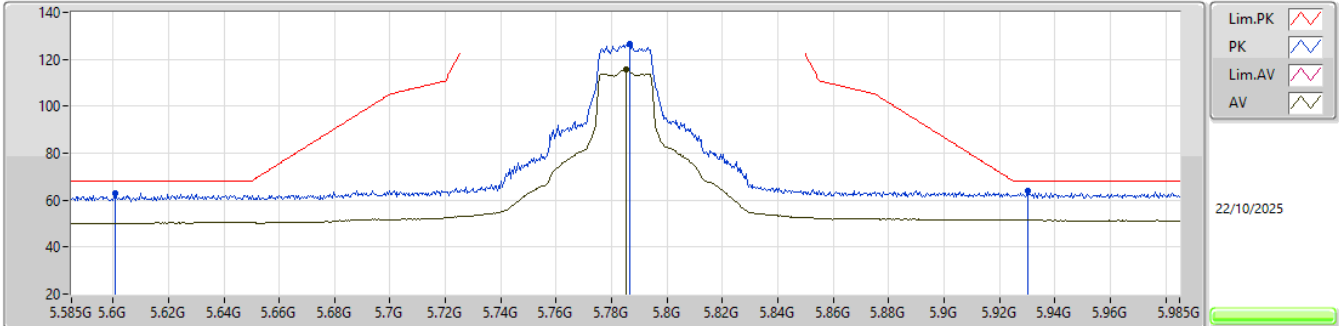


EUT Y_2TX
Setting 30
05-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.6006G	62.98	68.20	-5.22	56.44	3	Vertical	200.1	1.80	-	32.90	8.57	34.93
PK	5.7866G	126.35	Inf	-Inf	118.66	3	Vertical	200.1	1.80	-	33.75	8.78	34.84
AV	5.7854G	115.60	Inf	-Inf	107.92	3	Vertical	200.1	1.80	-	33.74	8.78	34.84
PK	5.9302G	64.00	68.20	-4.20	55.66	3	Vertical	200.1	1.80	-	34.16	8.95	34.77

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5785MHz_TX

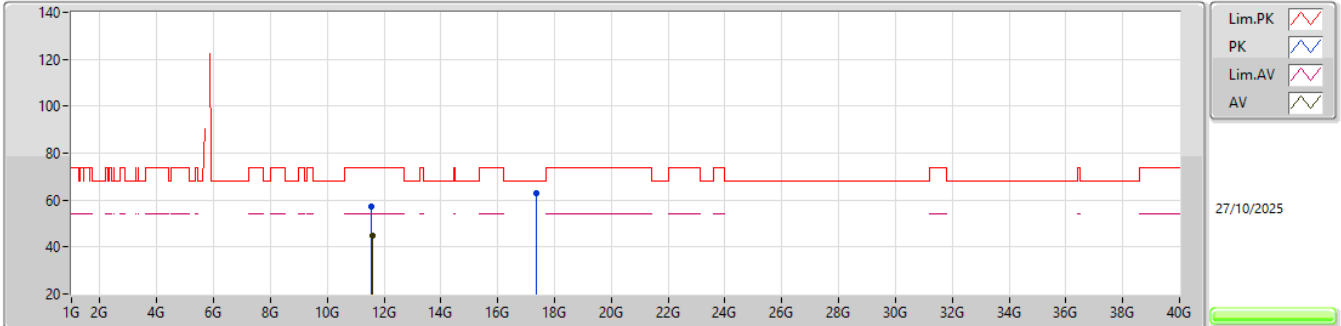


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.56631G	57.39	74.00	-16.61	42.56	3	Vertical	165	1.80	-	39.17	10.77	35.11			
AV	11.58221G	44.87	54.00	-9.13	29.98	3	Vertical	165	1.80	-	39.23	10.77	35.11			
PK	17.36703G	63.03	68.20	-5.17	42.40	3	Vertical	6	1.80	-	41.50	12.99	33.86			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


5785MHz_TX

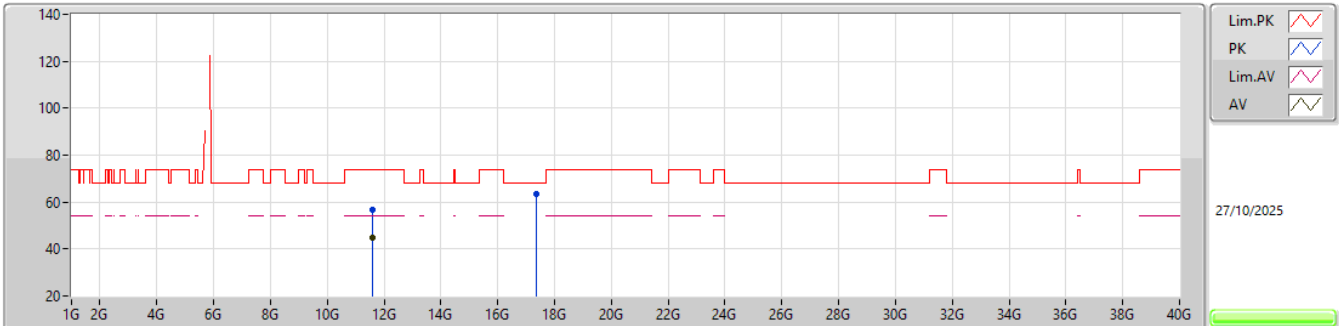EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.58101G	56.84	74.00	-17.16	41.96	3	Horizontal	211	1.80	-	39.22	10.77	35.11			
AV	11.58164G	44.79	54.00	-9.21	29.90	3	Horizontal	211	1.80	-	39.23	10.77	35.11			
PK	17.36049G	63.41	68.20	-4.79	42.83	3	Horizontal	275	1.80	-	41.46	12.99	33.87			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5825MHz_TX

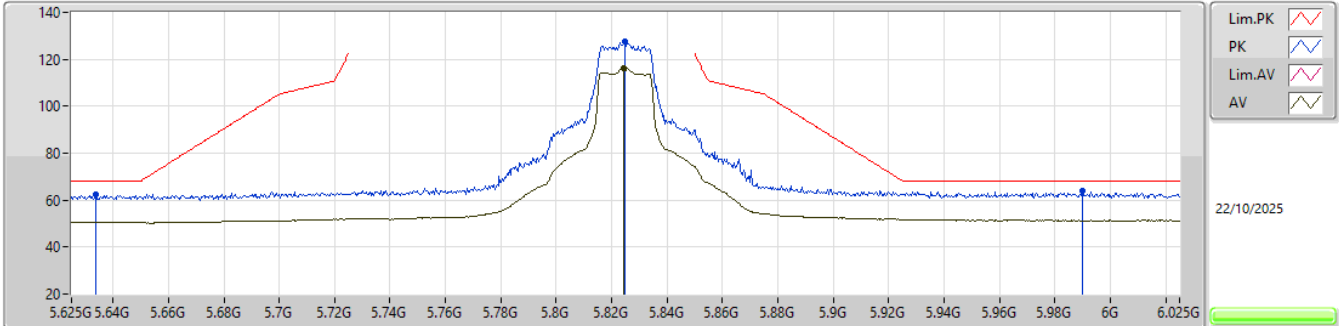


EUT Y_2TX
Setting 30
05-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6338G	62.28	68.20	-5.92	55.62	3	Vertical	174	1.80	-	32.97	8.61	34.92			
PK	5.8246G	127.34	Inf	-Inf	119.48	3	Vertical	174	1.80	-	33.85	8.83	34.82			
AV	5.8242G	116.11	Inf	-Inf	108.25	3	Vertical	174	1.80	-	33.85	8.83	34.82			
PK	5.9898G	63.88	68.20	-4.32	55.40	3	Vertical	174	1.80	-	34.20	9.02	34.74			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5825MHz_TX

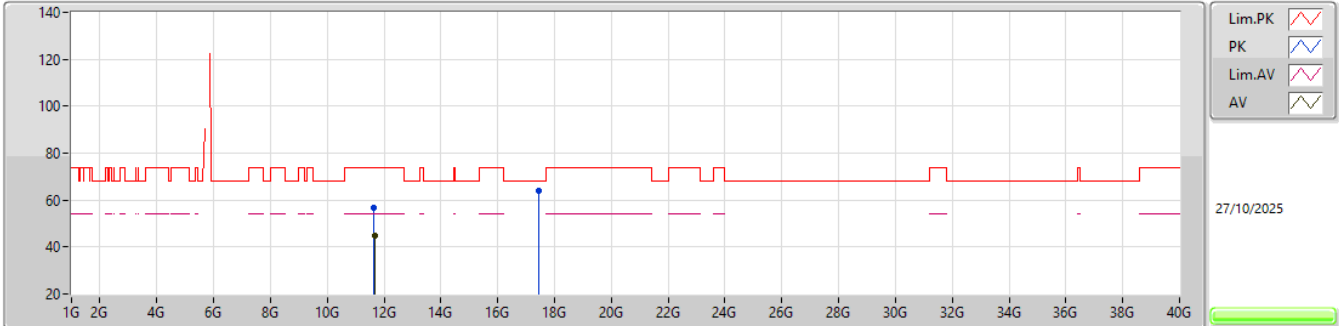


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.65366G	56.70	74.00	-17.30	41.63	3	Vertical	188	2.98	-	39.40	10.80	35.13			
AV	11.65927G	45.02	54.00	-8.98	29.95	3	Vertical	188	2.98	-	39.40	10.80	35.13			
PK	17.46075G	64.19	68.20	-4.01	42.69	3	Vertical	125	1.60	-	42.19	13.04	33.73			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5825MHz_TX

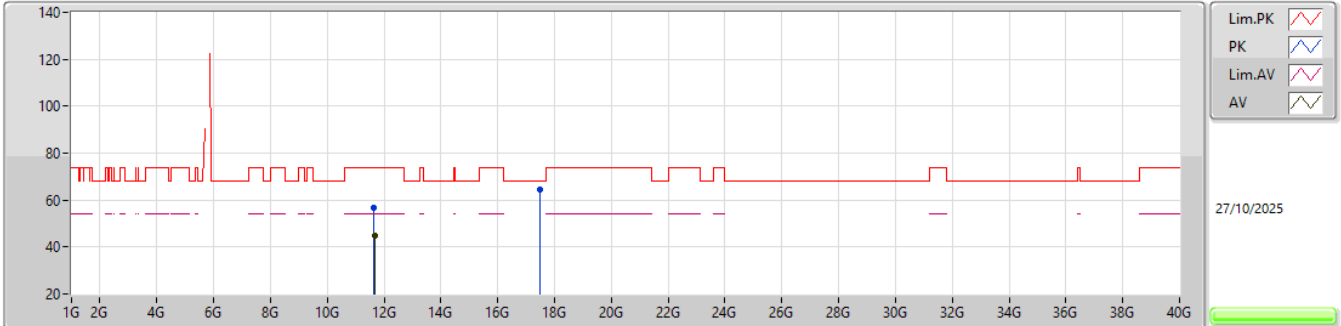


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64817G	56.94	74.00	-17.06	41.87	3	Horizontal	180	1.80	-	39.40	10.80	35.13			
AV	11.66116G	45.06	54.00	-8.94	29.99	3	Horizontal	180	1.80	-	39.40	10.80	35.13			
PK	17.47413G	64.27	68.20	-3.93	42.66	3	Horizontal	282	1.80	-	42.29	13.04	33.72			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5190MHz_TX

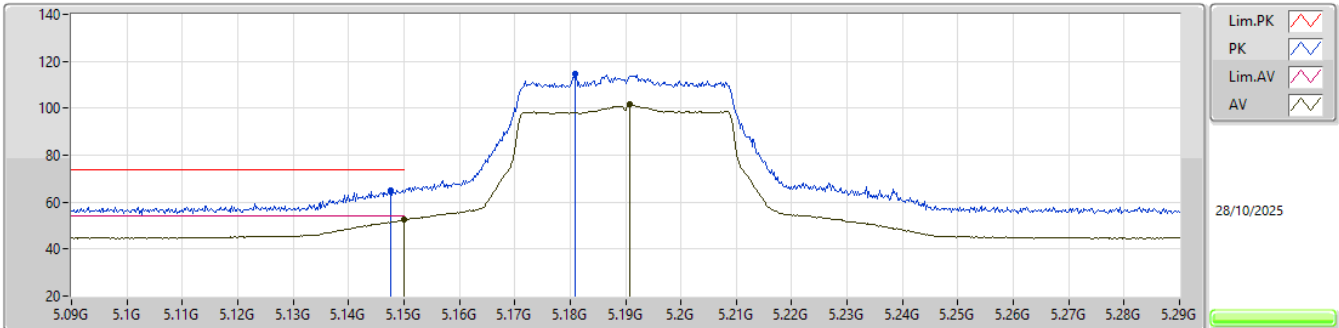


EUT Y_2TX
Setting 21
04-E-5-5-13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1476G	65.20	74.00	-8.80	68.70	3	Vertical	360	1.80	-	31.99	8.39	43.88			
AV	5.15G	52.38	54.00	-1.62	55.86	3	Vertical	360	1.80	-	32.00	8.39	43.87			
PK	5.1808G	114.57	Inf	-Inf	118.20	3	Vertical	360	1.80	-	31.82	8.41	43.86			
AV	5.1908G	101.53	Inf	-Inf	105.21	3	Vertical	360	1.80	-	31.76	8.41	43.85			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5190MHz_TX

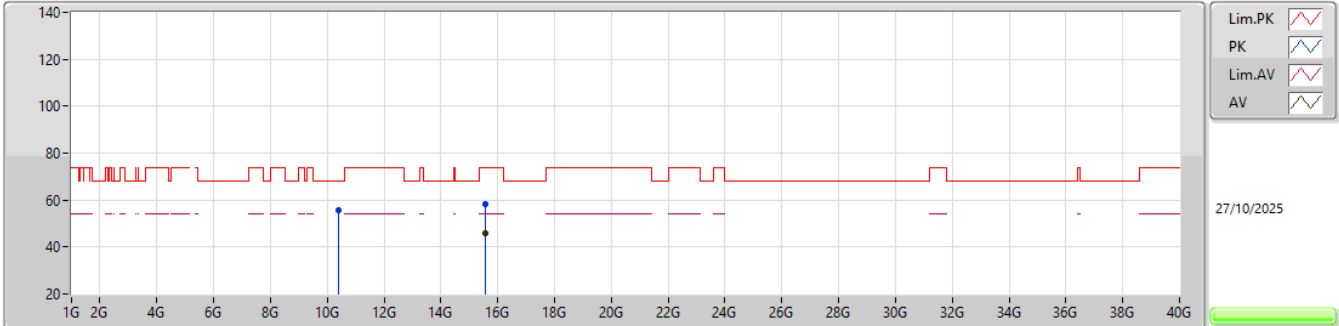


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.37718G	55.69	68.20	-12.51	42.33	3	Vertical	342	1.80	-	37.99	10.38	35.01			
PK	15.57315G	58.35	74.00	-15.65	43.06	3	Vertical	215	1.78	-	38.21	12.21	35.13			
AV	15.55899G	45.83	54.00	-8.17	30.50	3	Vertical	215	1.78	-	38.26	12.20	35.13			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5190MHz_TX

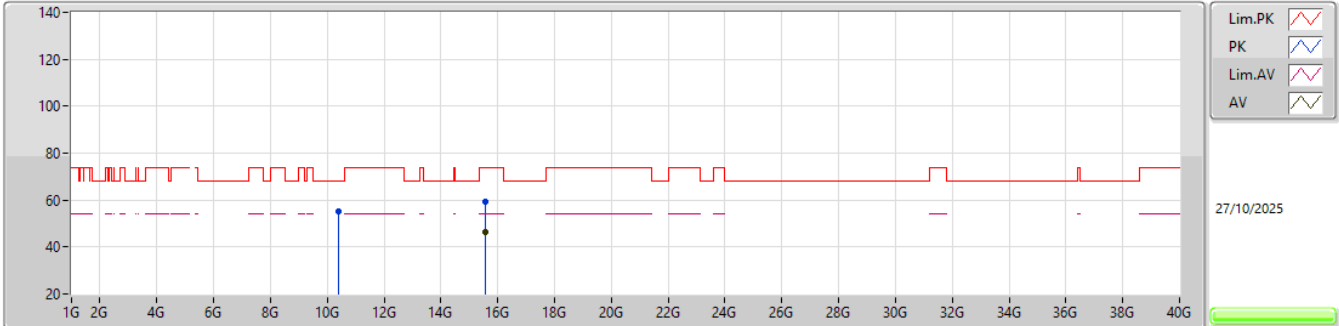


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38267G	55.19	68.20	-13.01	41.84	3	Horizontal	26	1.80	-	37.97	10.38	35.00			
PK	15.55737G	59.42	74.00	-14.58	44.08	3	Horizontal	236	2.32	-	38.27	12.20	35.13			
AV	15.55788G	46.15	54.00	-7.85	30.81	3	Horizontal	236	2.32	-	38.27	12.20	35.13			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5230MHz_TX

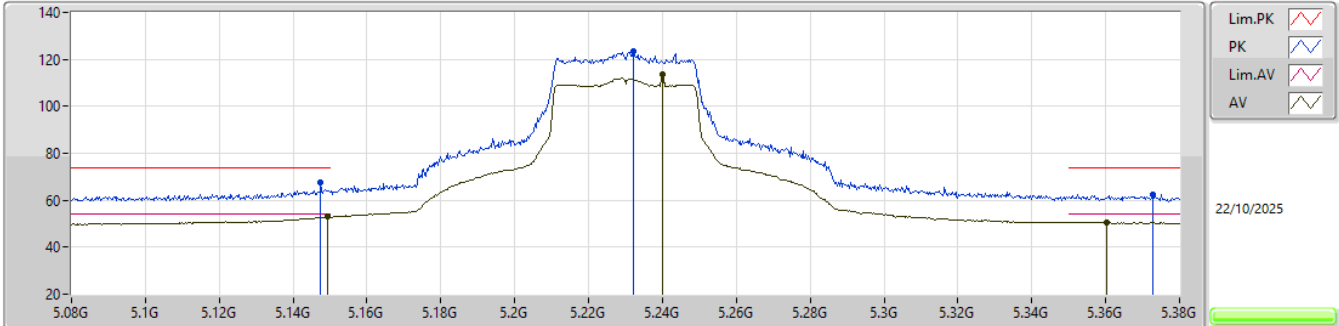


EUT_V_2TX
Setting 28
05-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1475G	67.44	74.00	-6.56	61.23	3	Vertical	199	1.80	-	33.09	8.23	35.11			
AV	5.1493G	52.96	54.00	-1.04	46.74	3	Vertical	199	1.80	-	33.10	8.23	35.11			
PK	5.2321G	123.33	Inf	-Inf	117.09	3	Vertical	199	1.80	-	33.04	8.28	35.08			
AV	5.2399G	113.53	Inf	-Inf	107.30	3	Vertical	199	1.80	-	33.02	8.28	35.07			
PK	5.3728G	62.49	74.00	-11.51	56.22	3	Vertical	199	1.80	-	32.90	8.40	35.03			
AV	5.3602G	50.69	54.00	-3.31	44.43	3	Vertical	199	1.80	-	32.90	8.39	35.03			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5230MHz_TX

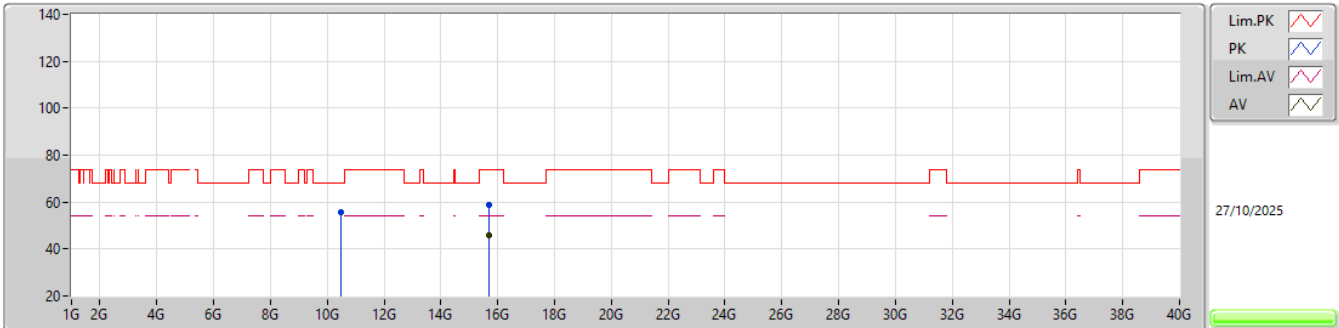


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.46399G	55.71	68.20	-12.49	42.27	3	Vertical	330	1.80	-	37.96	10.41	34.93			
PK	15.67713G	58.73	74.00	-15.27	43.81	3	Vertical	275	1.80	-	37.80	12.25	35.13			
AV	15.69555G	46.04	54.00	-7.96	31.11	3	Vertical	275	1.80	-	37.80	12.26	35.13			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5230MHz_TX

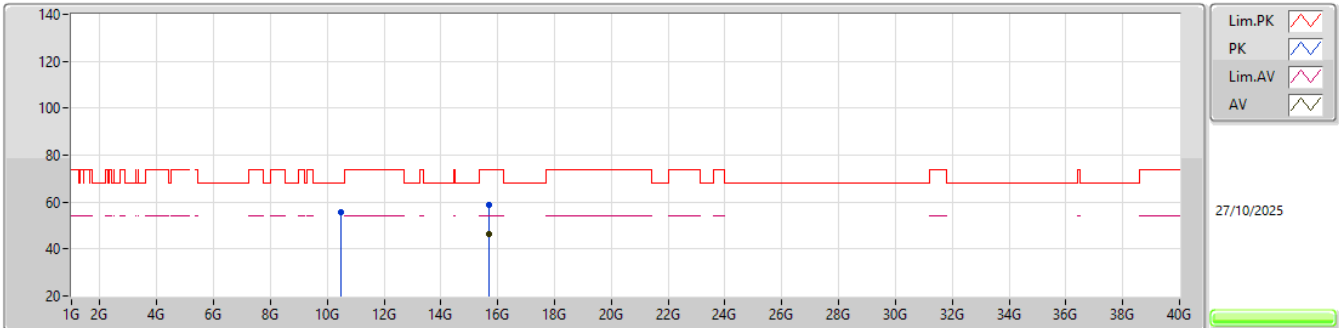


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47212G	55.58	68.20	-12.62	42.10	3	Horizontal	29	1.80	-	37.99	10.41	34.92			
PK	15.69645G	58.79	74.00	-15.21	43.86	3	Horizontal	233	1.80	-	37.80	12.26	35.13			
AV	15.68853G	46.33	54.00	-7.67	31.40	3	Horizontal	233	1.80	-	37.80	12.26	35.13			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5270MHz_TX

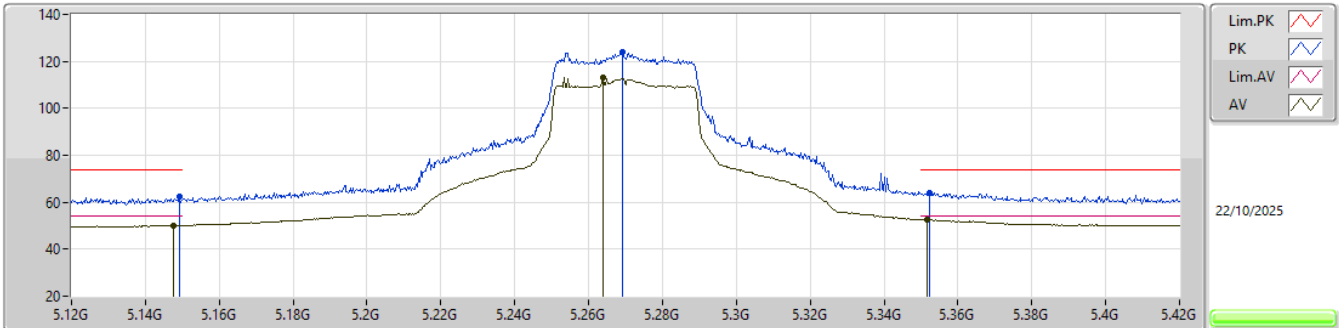


EUT_V_2TX
Setting 28
05-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1491G	62.21	74.00	-11.79	55.99	3	Vertical	196.5	2.25	-	33.10	8.23	35.11			
AV	5.1476G	50.03	54.00	-3.97	43.81	3	Vertical	196.5	2.25	-	33.10	8.23	35.11			
PK	5.2691G	124.15	Inf	-Inf	117.94	3	Vertical	196.5	2.25	-	32.96	8.31	35.06			
AV	5.264G	113.32	Inf	-Inf	107.11	3	Vertical	196.5	2.25	-	32.97	8.30	35.06			
PK	5.3522G	64.20	74.00	-9.80	57.95	3	Vertical	196.5	2.25	-	32.90	8.38	35.03			
AV	5.3516G	52.70	54.00	-1.30	46.45	3	Vertical	196.5	2.25	-	32.90	8.38	35.03			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


5270MHz_TX

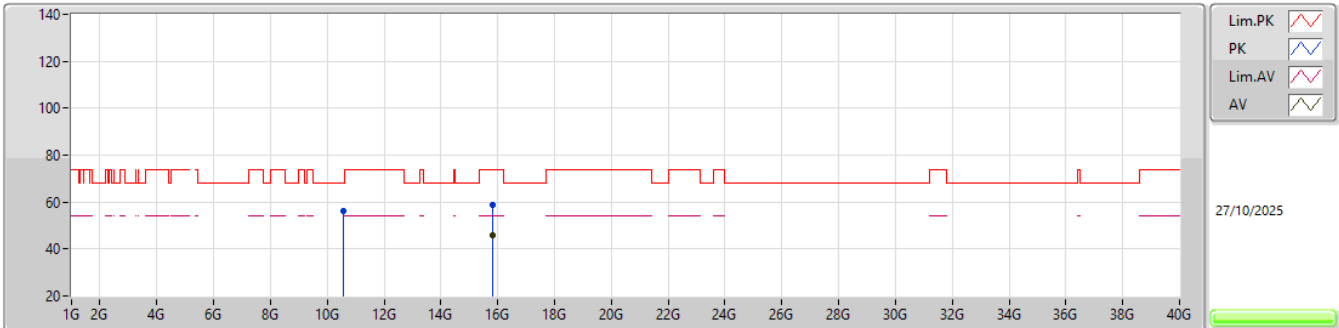EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.54975G	56.32	68.20	-11.88	42.59	3	Vertical	134	2.75	-	38.20	10.44	34.91			
PK	15.81108G	58.73	74.00	-15.27	44.02	3	Vertical	29	2.50	-	37.54	12.31	35.14			
AV	15.80622G	45.98	54.00	-8.02	31.29	3	Vertical	29	2.50	-	37.52	12.31	35.14			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


5270MHz_TX

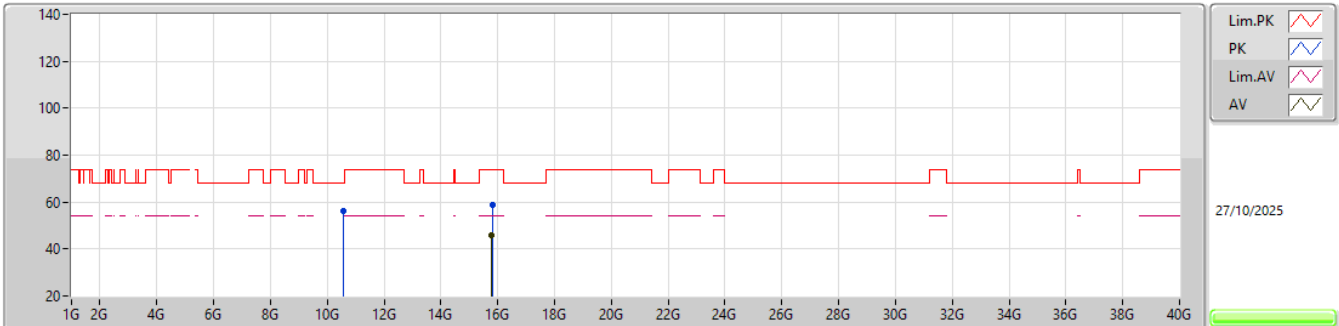EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.55164G	56.15	68.20	-12.05	42.42	3	Horizontal	347	1.80	-	38.20	10.44	34.91			
PK	15.80703G	58.85	74.00	-15.15	44.15	3	Horizontal	194	1.80	-	37.53	12.31	35.14			
AV	15.79659G	45.92	54.00	-8.08	31.24	3	Horizontal	194	1.80	-	37.51	12.31	35.14			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5310MHz_TX

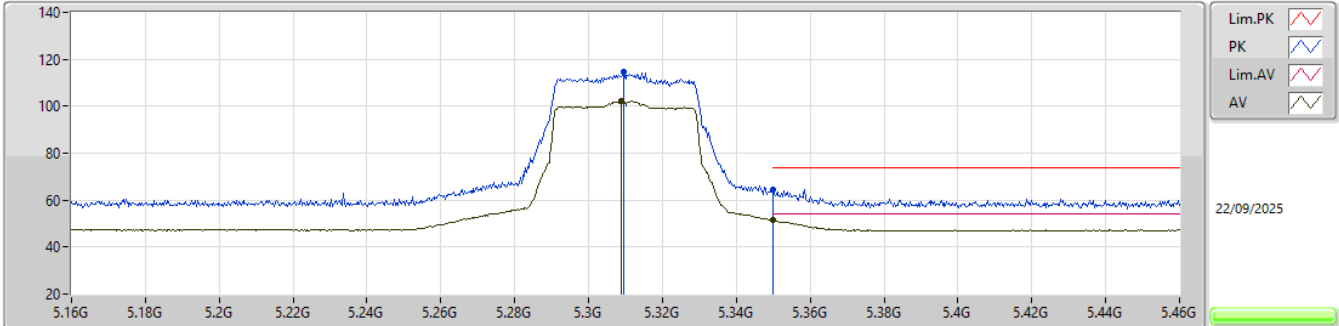


EUT Y_2TX
Setting 22
04-E-G-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3094G	114.71	Inf	-Inf	118.81	3	Vertical	51	2.05	-	31.24	8.46	43.80			
AV	5.3088G	102.43	Inf	-Inf	106.53	3	Vertical	51	2.05	-	31.24	8.46	43.80			
PK	5.35G	64.50	74.00	-9.50	68.40	3	Vertical	51	2.05	-	31.40	8.47	43.77			
AV	5.35G	51.52	54.00	-2.48	55.42	3	Vertical	51	2.05	-	31.40	8.47	43.77			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5310MHz_TX

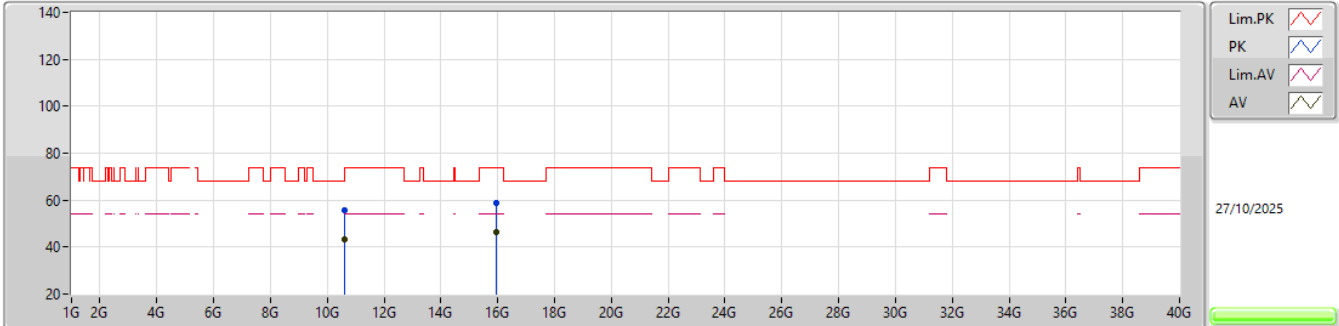


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.61046G	55.55	74.00	-18.45	41.81	3	Vertical	280	1.80	-	38.20	10.46	34.92			
AV	10.62423G	43.45	54.00	-10.55	29.71	3	Vertical	280	1.80	-	38.20	10.46	34.92			
PK	15.93369G	58.77	74.00	-15.23	43.87	3	Vertical	223	1.80	-	37.67	12.37	35.14			
AV	15.93348G	46.13	54.00	-7.87	31.23	3	Vertical	223	1.80	-	37.67	12.37	35.14			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5310MHz_TX

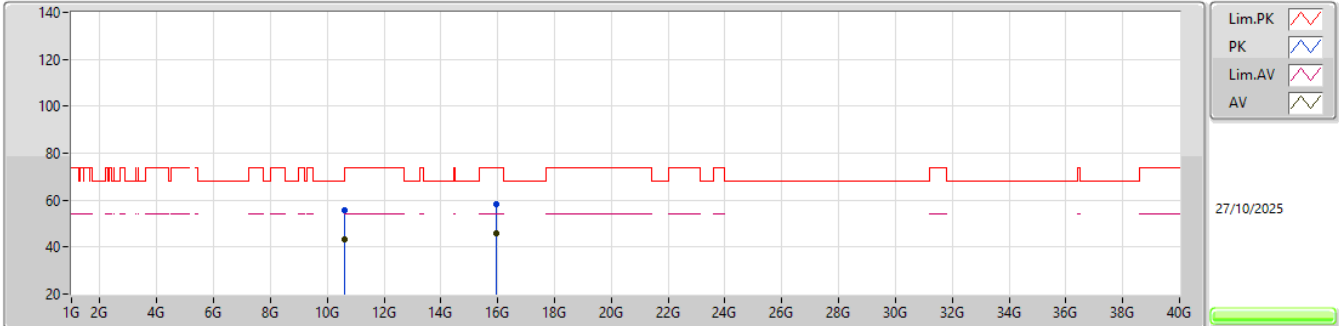


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.6269G	55.88	74.00	-18.12	42.14	3	Horizontal	235	3.00	-	38.20	10.46	34.92			
AV	10.62603G	43.42	54.00	-10.58	29.68	3	Horizontal	235	3.00	-	38.20	10.46	34.92			
PK	15.93558G	58.23	74.00	-15.77	43.34	3	Horizontal	60	1.80	-	37.66	12.37	35.14			
AV	15.93669G	46.04	54.00	-7.96	31.16	3	Horizontal	60	1.80	-	37.65	12.37	35.14			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5510MHz_TX

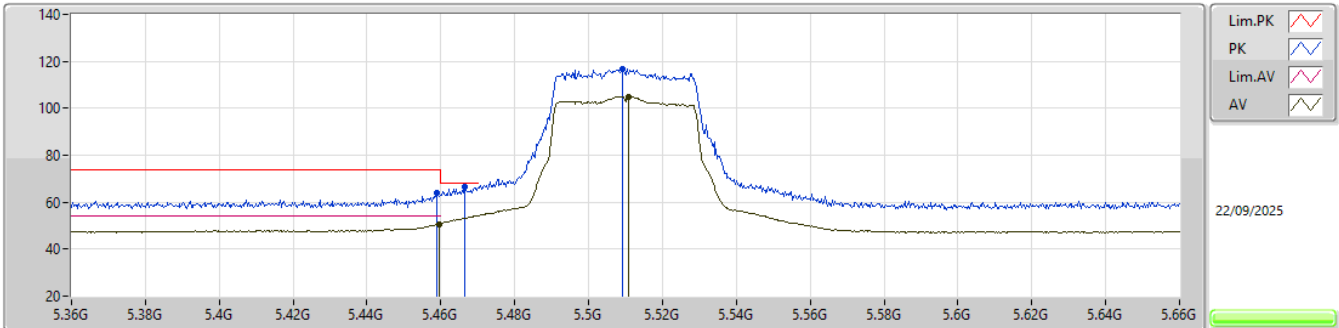


EUT V_2TX
Setting 22
04-E-G-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.459G	63.78	74.00	-10.22	67.31	3	Vertical	168	1.80	-	31.64	8.55	43.72			
AV	5.4596G	50.77	54.00	-3.23	54.30	3	Vertical	168	1.80	-	31.64	8.55	43.72			
PK	5.4665G	66.42	68.20	-1.78	69.91	3	Vertical	168	1.80	-	31.67	8.56	43.72			
PK	5.5091G	116.71	Inf	-Inf	120.02	3	Vertical	168	1.80	-	31.78	8.60	43.69			
AV	5.5109G	105.03	Inf	-Inf	108.33	3	Vertical	168	1.80	-	31.78	8.61	43.69			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5510MHz_TX

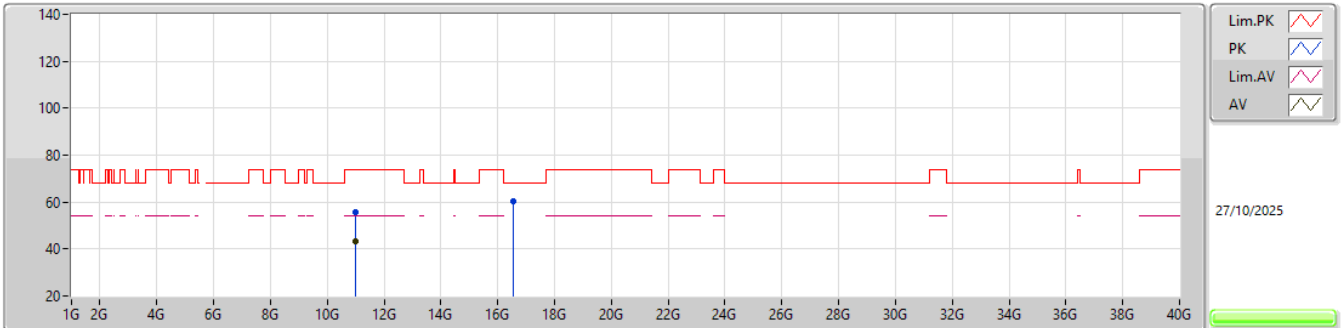


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01628G	55.64	74.00	-18.36	41.71	3	Vertical	20	1.80	-	38.33	10.59	34.99			
AV	11.00896G	43.36	54.00	-10.64	29.44	3	Vertical	20	1.80	-	38.32	10.59	34.99			
PK	16.53432G	60.22	68.20	-7.98	44.16	3	Vertical	115	1.80	-	38.21	12.63	34.78			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5510MHz_TX

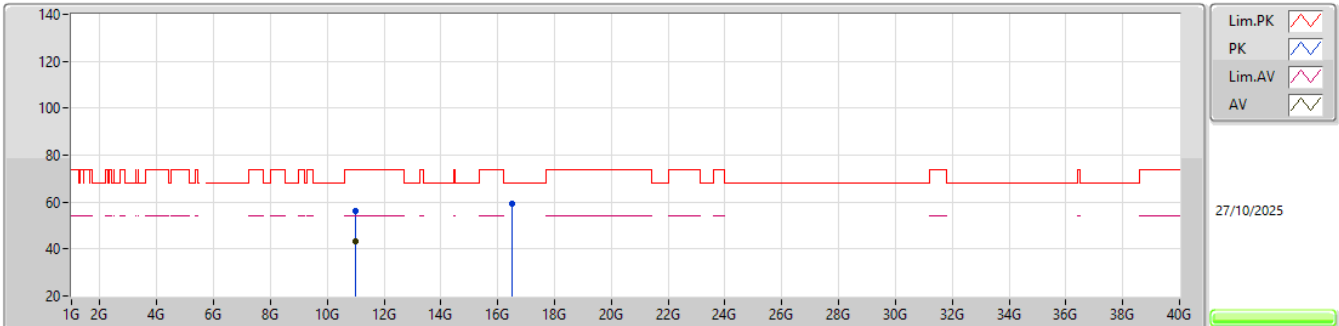


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00893G	56.08	74.00	-17.92	42.16	3	Horizontal	186	1.80	-	38.32	10.59	34.99			
AV	11.00569G	43.41	54.00	-10.59	29.50	3	Horizontal	186	1.80	-	38.31	10.59	34.99			
PK	16.51602G	59.56	68.20	-8.64	43.64	3	Horizontal	34	1.52	-	38.10	12.62	34.80			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5550MHz_TX

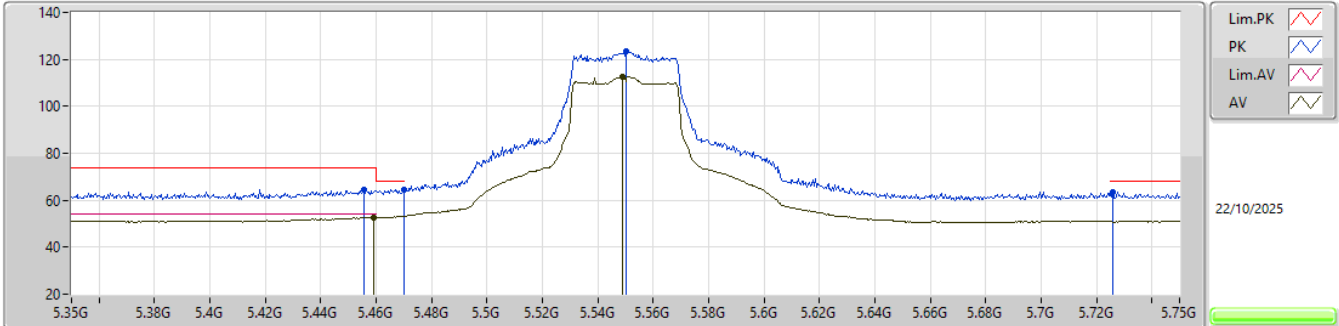


EUT V_2TX
Setting 28
05-U-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4556G	64.39	74.00	-9.61	58.02	3	Vertical	13	1.80	-	32.91	8.46	35.00			
AV	5.4592G	52.76	54.00	-1.24	46.37	3	Vertical	13	1.80	-	32.92	8.46	34.99			
PK	5.47G	64.37	68.20	-3.83	57.95	3	Vertical	13	1.80	-	32.94	8.47	34.99			
PK	5.5504G	123.63	Inf	-Inf	117.06	3	Vertical	13	1.80	-	33.00	8.53	34.96			
AV	5.5488G	112.58	Inf	-Inf	106.01	3	Vertical	13	1.80	-	33.00	8.53	34.96			
PK	5.726G	63.22	68.20	-4.98	55.88	3	Vertical	13	1.80	-	33.50	8.71	34.87			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5550MHz_TX

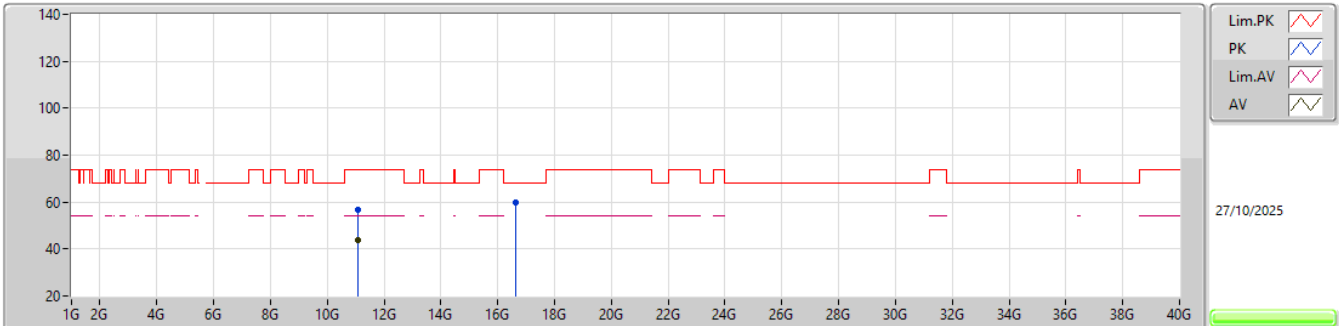


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.08668G	56.80	74.00	-17.20	42.73	3	Vertical	176	1.80	-	38.47	10.61	35.01			
AV	11.08557G	43.84	54.00	-10.16	29.77	3	Vertical	176	1.80	-	38.47	10.61	35.01			
PK	16.64718G	59.76	68.20	-8.44	42.97	3	Vertical	358	1.80	-	38.79	12.68	34.68			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


5550MHz_TX

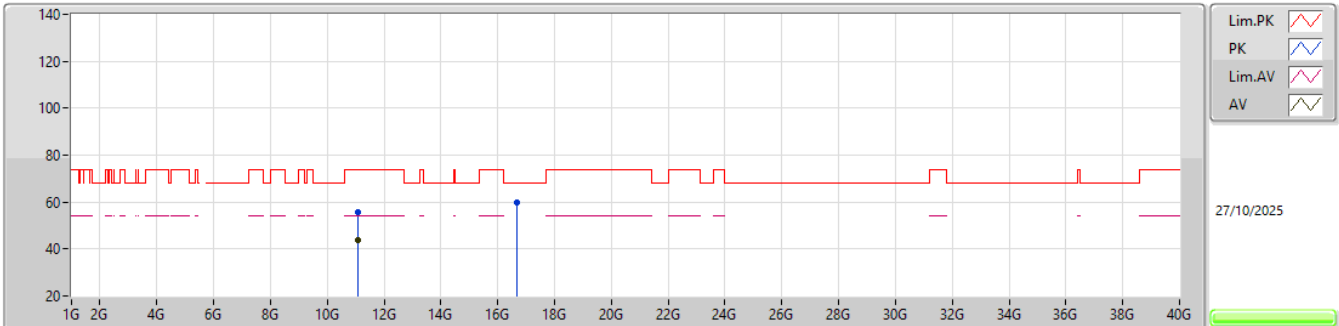EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.09388G	55.81	74.00	-18.19	41.71	3	Horizontal	214	1.02	-	38.49	10.62	35.01			
AV	11.08581G	43.77	54.00	-10.23	29.70	3	Horizontal	214	1.02	-	38.47	10.61	35.01			
PK	16.66032G	59.93	68.20	-8.27	43.11	3	Horizontal	34	2.52	-	38.80	12.69	34.67			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5670MHz_TX

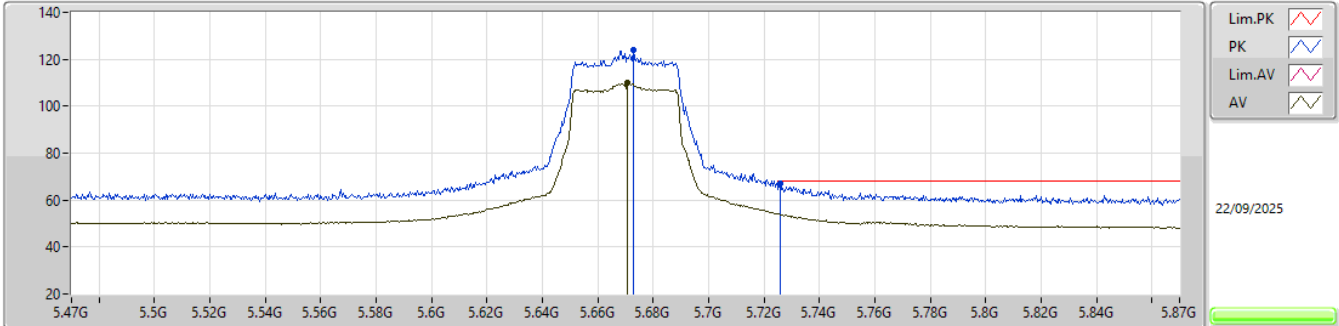


EUT Y_2TX
Setting 28
04-E-G-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6728G	124.12	Inf	-Inf	126.98	3	Vertical	8	2.13	-	31.89	8.78	43.53			
AV	5.6708G	109.86	Inf	-Inf	112.74	3	Vertical	8	2.13	-	31.88	8.77	43.53			
PK	5.726G	67.00	68.20	-1.20	69.59	3	Vertical	8	2.13	-	32.05	8.83	43.47			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5670MHz_TX

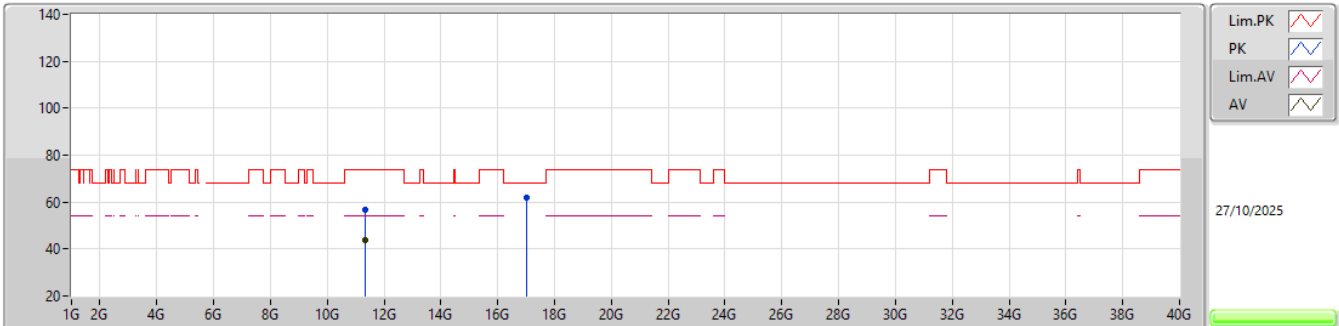


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.33574G	56.72	74.00	-17.28	42.52	3	Vertical	149	1.80	-	38.57	10.69	35.06				
AV	11.34693G	43.61	54.00	-10.39	29.39	3	Vertical	149	1.80	-	38.59	10.70	35.07				
PK	17.01804G	61.67	68.20	-6.53	43.18	3	Vertical	50	1.22	-	40.00	12.84	34.35				

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5670MHz_TX

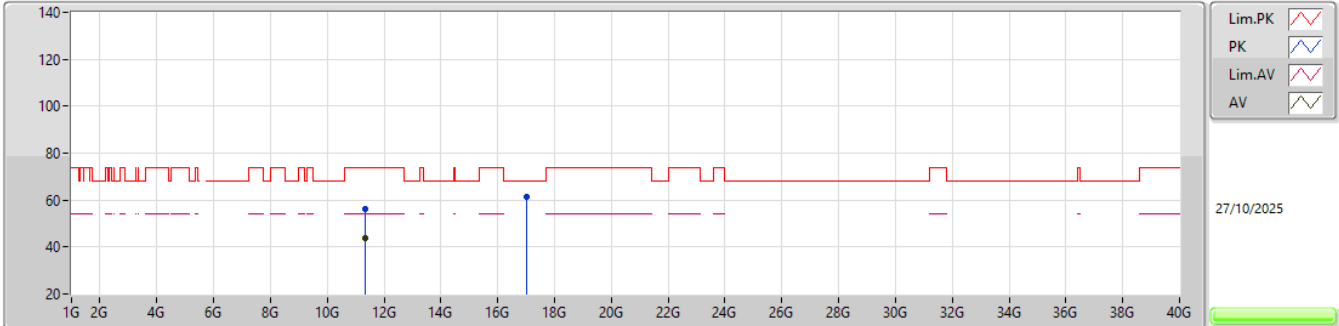


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3331G	56.05	74.00	-17.95	41.85	3	Horizontal	258	1.80	-	38.57	10.69	35.06			
AV	11.35113G	43.57	54.00	-10.43	29.34	3	Horizontal	258	1.80	-	38.60	10.70	35.07			
PK	17.00799G	61.59	68.20	-6.61	43.11	3	Horizontal	360	1.32	-	40.00	12.84	34.36			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

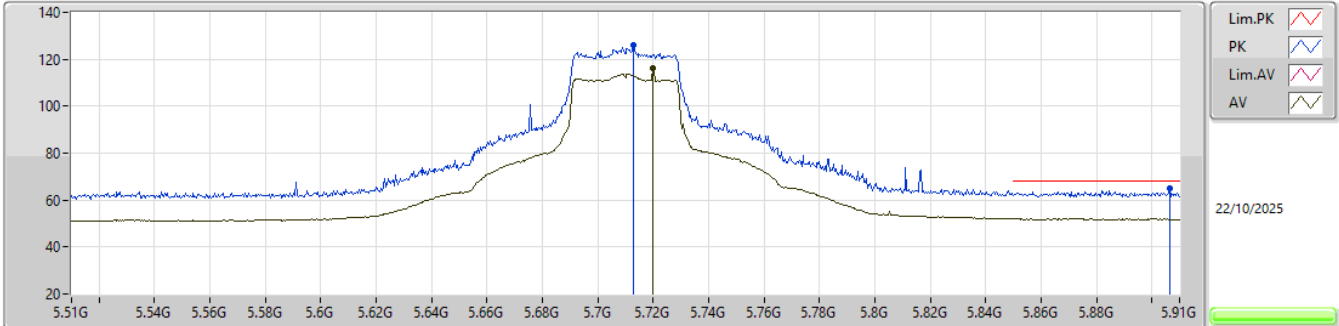


EUT Y_2TX
Setting 30
05-U-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7128G	126.03	Inf	-Inf	118.76	3	Vertical	202	1.80	-	33.45	8.70	34.88			
AV	5.72G	116.32	Inf	-Inf	109.00	3	Vertical	202	1.80	-	33.48	8.71	34.87			
PK	5.9064G	65.05	68.20	-3.15	56.80	3	Vertical	202	1.80	-	34.11	8.92	34.78			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

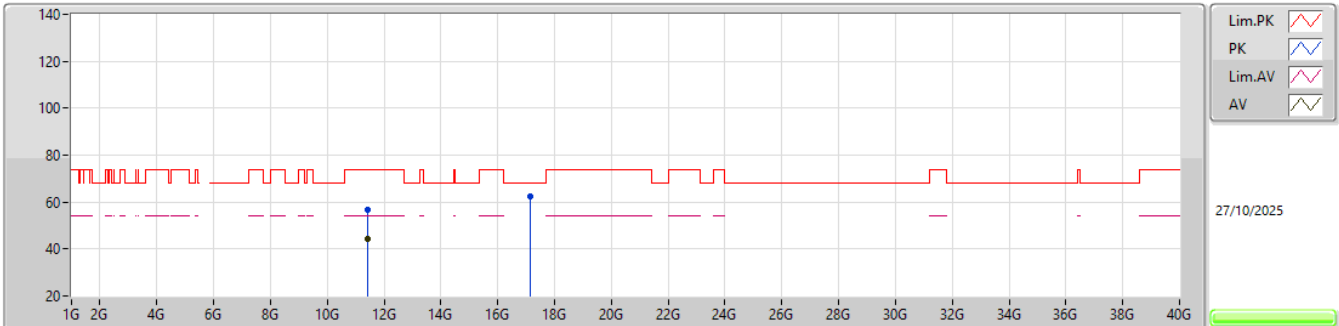


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.42846G	56.68	74.00	-17.32	42.28	3	Vertical	223	2.06	-	38.76	10.72	35.08				
AV	11.43083G	44.22	54.00	-9.78	29.81	3	Vertical	223	2.06	-	38.76	10.73	35.08				
PK	17.13456G	62.21	68.20	-5.99	43.26	3	Vertical	355	1.80	-	40.24	12.89	34.18				

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

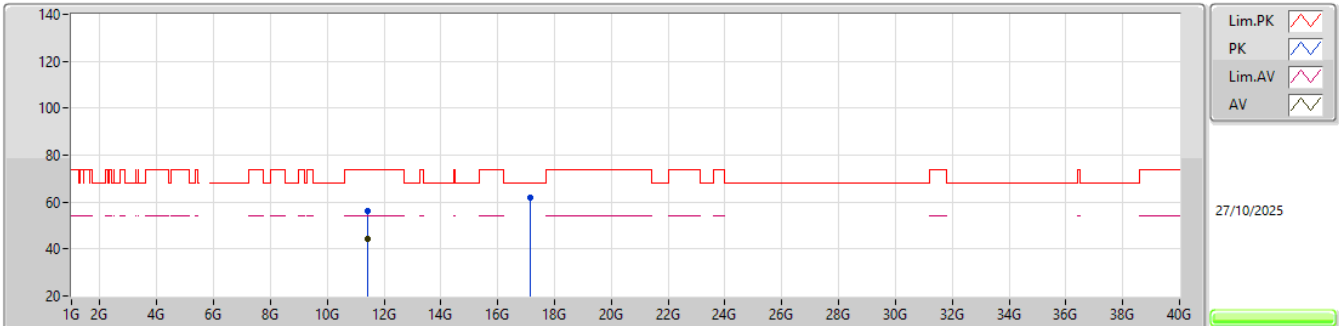


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40671G	56.42	74.00	-17.58	42.07	3	Horizontal	23	1.80	-	38.71	10.72	35.08			
AV	11.43158G	44.22	54.00	-9.78	29.81	3	Horizontal	23	1.80	-	38.76	10.73	35.08			
PK	17.13273G	62.14	68.20	-6.06	43.21	3	Horizontal	28	1.80	-	40.23	12.89	34.19			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5755MHz_TX

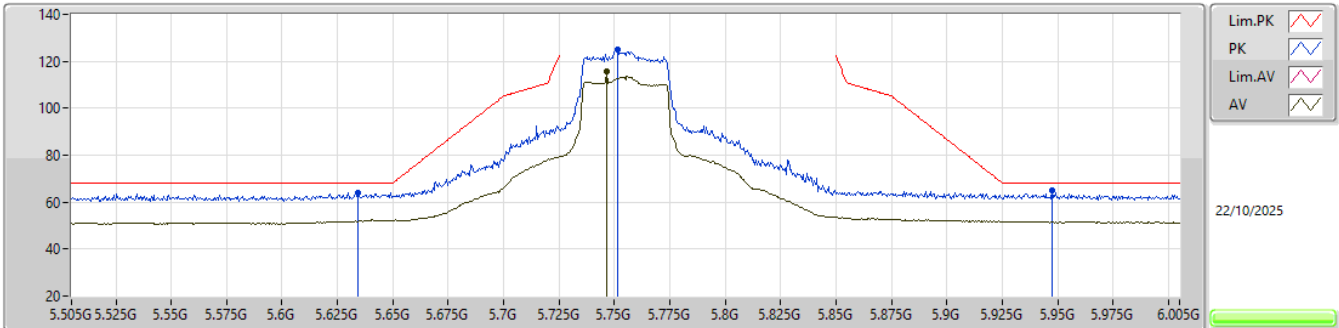


EUT Y_2TX
Setting 30
05-U-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6345G	64.20	68.20	-4.00	57.54	3	Vertical	202	1.80	-	32.97	8.61	34.92				
PK	5.7515G	125.08	Inf	-Inf	117.59	3	Vertical	202	1.80	-	33.61	8.74	34.86				
AV	5.7465G	115.90	Inf	-Inf	108.43	3	Vertical	202	1.80	-	33.59	8.74	34.86				
PK	5.9475G	64.78	68.20	-3.42	56.38	3	Vertical	202	1.80	-	34.20	8.97	34.77				

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


5755MHz_TX

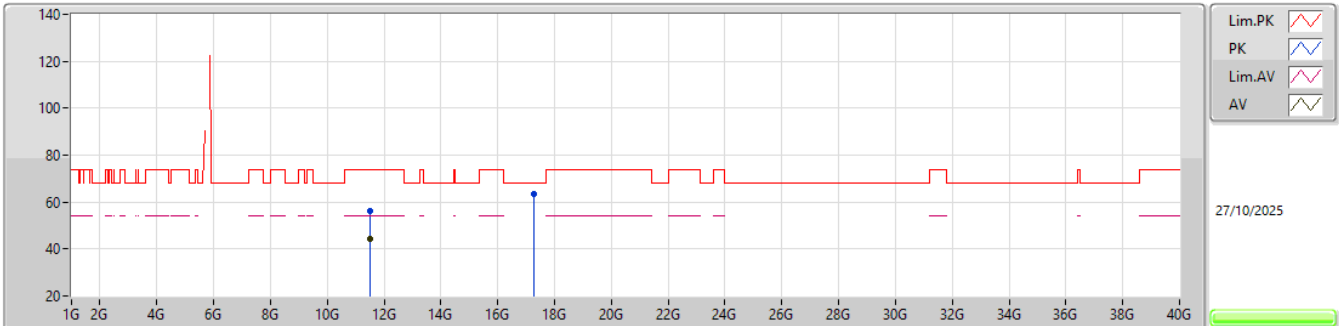EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.52023G	56.13	74.00	-17.87	41.50	3	Vertical	9	2.18	-	38.98	10.75	35.10			
AV	11.4953G	44.33	54.00	-9.67	29.79	3	Vertical	9	2.18	-	38.89	10.75	35.10			
PK	17.27961G	63.19	68.20	-5.01	43.23	3	Vertical	180	2.92	-	40.98	12.96	33.98			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5755MHz_TX

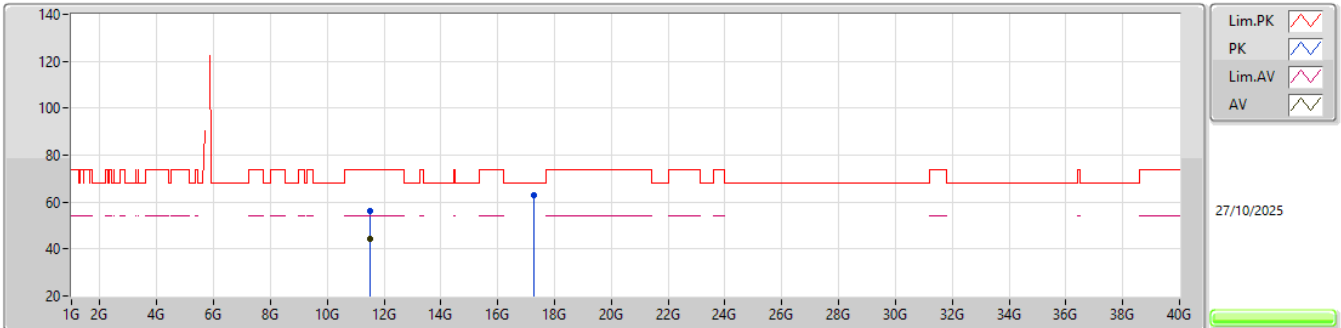


EUT_Y_2TX
Setting 30
03-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.51093G	56.41	74.00	-17.59	41.82	3	Horizontal	354	1.64	-	38.94	10.75	35.10				
AV	11.50781G	44.43	54.00	-9.57	29.85	3	Horizontal	354	1.64	-	38.93	10.75	35.10				
PK	17.27703G	62.71	68.20	-5.49	42.78	3	Horizontal	52	1.80	-	40.96	12.96	33.99				

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5795MHz_TX

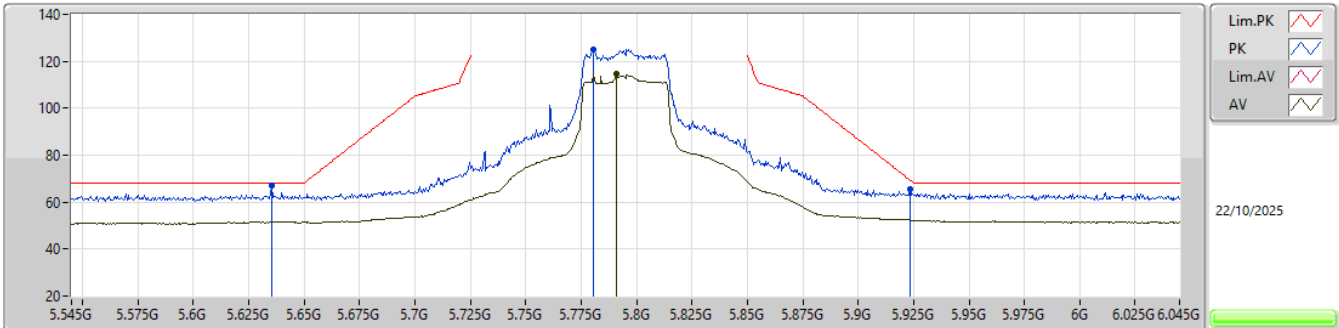


EUT_V_2TX
Setting 30
05-U-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6355G	66.94	68.20	-1.26	60.27	3	Vertical	200	1.80	-	32.97	8.61	34.91			
PK	5.7805G	125.20	Inf	-Inf	117.55	3	Vertical	200	1.80	-	33.72	8.78	34.85			
AV	5.791G	114.68	Inf	-Inf	106.97	3	Vertical	200	1.80	-	33.76	8.79	34.84			
PK	5.9235G	65.35	69.31	-3.96	57.04	3	Vertical	200	1.80	-	34.15	8.94	34.78			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5795MHz_TX

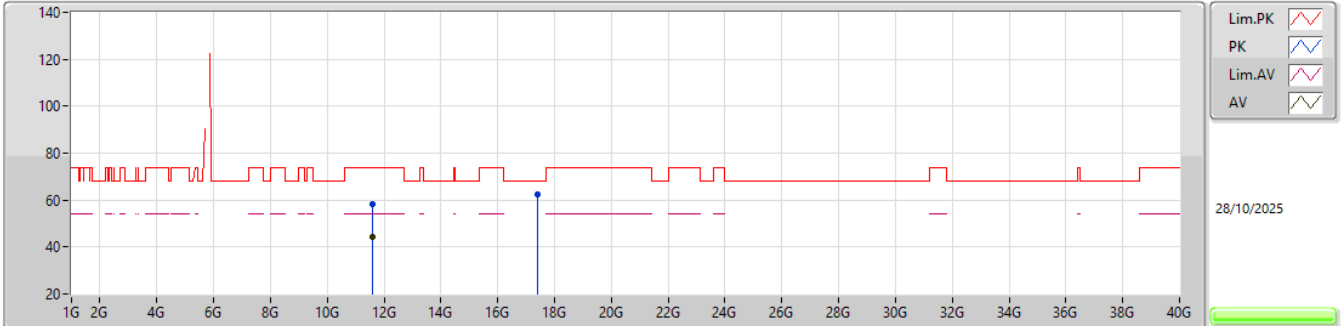


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.58302G	58.16	74.00	-15.84	47.96	3	Vertical	360	1.80	-	39.77	13.29	42.86			
AV	11.58016G	44.40	54.00	-9.60	34.18	3	Vertical	360	1.80	-	39.78	13.29	42.85			
PK	17.3867G	62.34	68.20	-5.86	47.40	3	Vertical	104	1.59	-	41.59	16.35	43.00			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5795MHz_TX

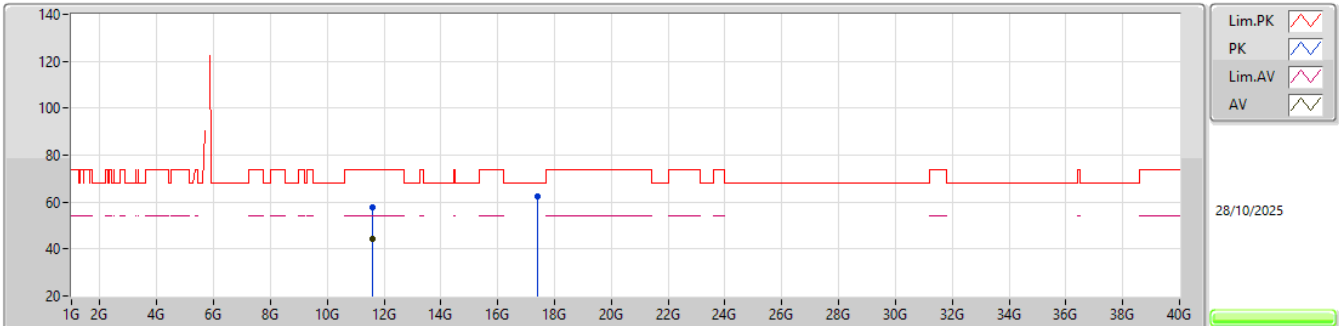


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.59228G	57.85	74.00	-16.15	47.69	3	Horizontal	322	2.94	-	39.73	13.30	42.87			
AV	11.58242G	44.49	54.00	-9.51	34.29	3	Horizontal	322	2.94	-	39.77	13.29	42.86			
PK	17.3872G	62.38	68.20	-5.82	47.43	3	Horizontal	283	1.62	-	41.60	16.35	43.00			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5210MHz_TX

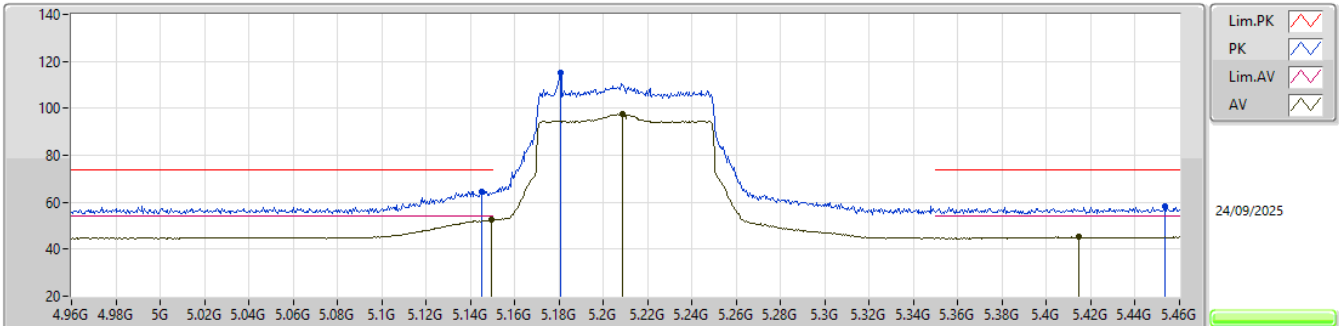


EUT_V_2TX
Setting 21
04-E-S-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.145G	64.56	74.00	-9.44	68.08	3	Vertical	4	1.80	-	31.97	8.39	43.88			
AV	5.1495G	52.36	54.00	-1.64	55.85	3	Vertical	4	1.80	-	32.00	8.39	43.88			
PK	5.1805G	115.40	Inf	-Inf	119.03	3	Vertical	4	1.80	-	31.82	8.41	43.86			
AV	5.2085G	97.81	Inf	-Inf	101.59	3	Vertical	4	1.80	-	31.65	8.42	43.85			
PK	5.4535G	58.19	74.00	-15.81	61.75	3	Vertical	4	1.80	-	31.61	8.55	43.72			
AV	5.4145G	45.17	54.00	-8.83	48.94	3	Vertical	4	1.80	-	31.46	8.51	43.74			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5210MHz_TX

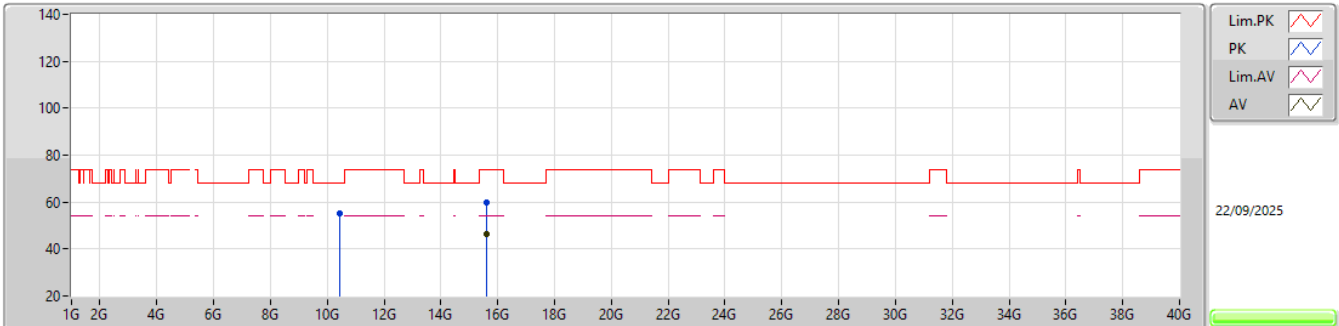


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.42642G	55.17	68.20	-13.03	46.60	3	Vertical	71	2.40	-	39.25	12.46	43.14			
PK	15.62056G	60.07	74.00	-13.93	48.72	3	Vertical	3	2.17	-	37.48	16.18	42.31			
AV	15.6202G	46.36	54.00	-7.64	35.01	3	Vertical	3	2.17	-	37.48	16.18	42.31			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5210MHz_TX

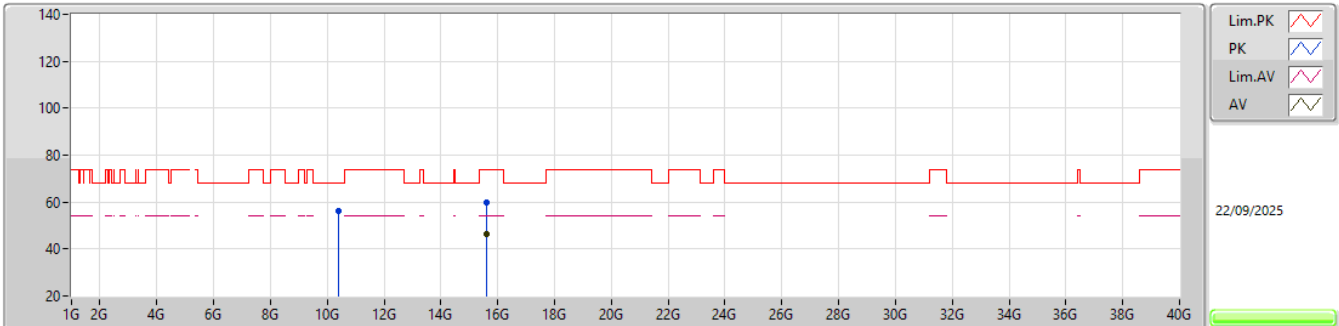


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41744G	56.40	68.20	-11.80	47.85	3	Horizontal	308	1.80	-	39.23	12.46	43.14			
PK	15.62334G	59.72	74.00	-14.28	48.40	3	Horizontal	357	1.44	-	37.46	16.18	42.32			
AV	15.62172G	46.40	54.00	-7.60	35.06	3	Horizontal	357	1.44	-	37.47	16.18	42.31			

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5290MHz_TX

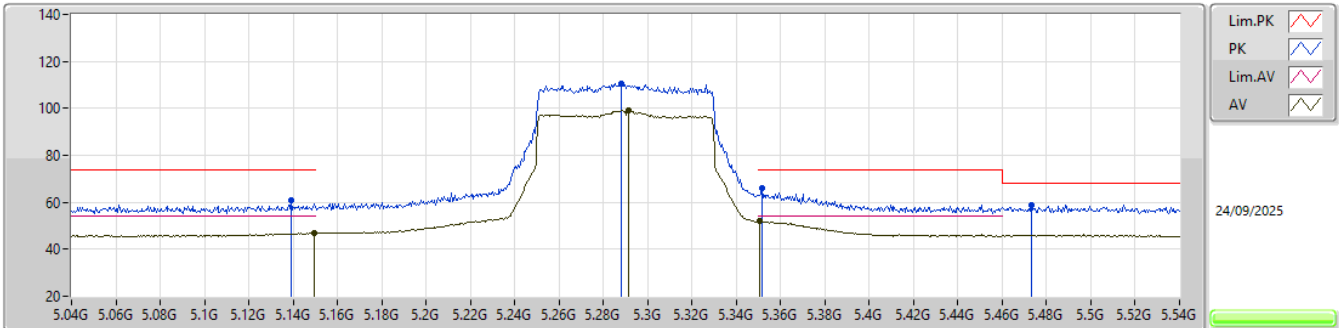
EUT_V_2TX
Setting 23
04-E-S-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.139G	60.68	74.00	-13.32	64.24	3	Vertical	122	1.80	-	31.93	8.39	43.88
AV	5.1495G	46.97	54.00	-7.03	50.46	3	Vertical	122	1.80	-	32.00	8.39	43.88
PK	5.288G	110.44	Inf	-Inf	114.55	3	Vertical	122	1.80	-	31.25	8.45	43.81
AV	5.2915G	98.95	Inf	-Inf	103.07	3	Vertical	122	1.80	-	31.23	8.45	43.80
PK	5.3515G	65.96	74.00	-8.04	69.86	3	Vertical	122	1.80	-	31.40	8.47	43.77
AV	5.3505G	52.12	54.00	-1.88	56.02	3	Vertical	122	1.80	-	31.40	8.47	43.77
PK	5.473G	58.71	68.20	-9.49	62.16	3	Vertical	122	1.80	-	31.69	8.57	43.71

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5290MHz_TX

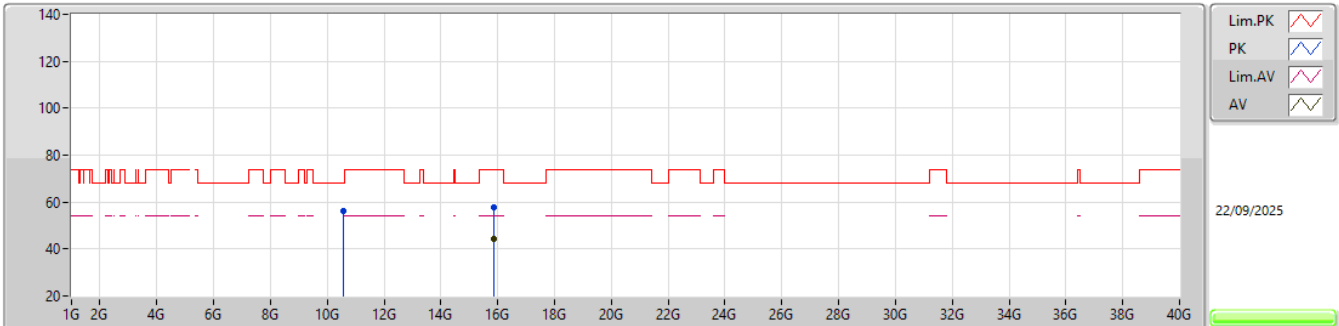EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.57566G	56.29	68.20	-11.91	47.49	3	Vertical	313	2.65	-	39.40	12.57	43.17				
PK	15.87848G	57.74	74.00	-16.26	46.81	3	Vertical	201	1.10	-	37.26	16.19	42.52				
AV	15.87698G	44.56	54.00	-9.44	33.63	3	Vertical	201	1.10	-	37.25	16.19	42.51				

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5290MHz_TX

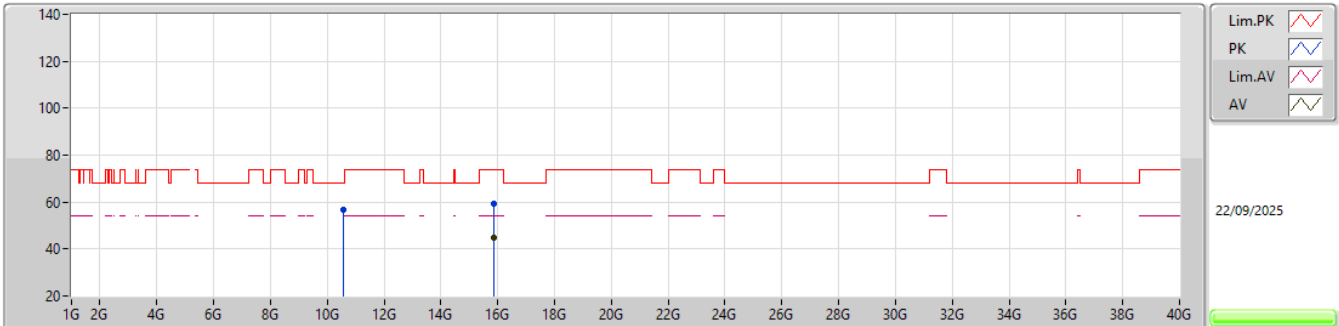EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57744G	56.76	68.20	-11.44	47.96	3	Horizontal	280	2.44	-	39.40	12.57	43.17			
PK	15.87108G	59.18	74.00	-14.82	48.26	3	Horizontal	246	1.66	-	37.24	16.19	42.51			
AV	15.88G	45.01	54.00	-8.99	34.08	3	Horizontal	246	1.66	-	37.26	16.19	42.52			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5530MHz_TX

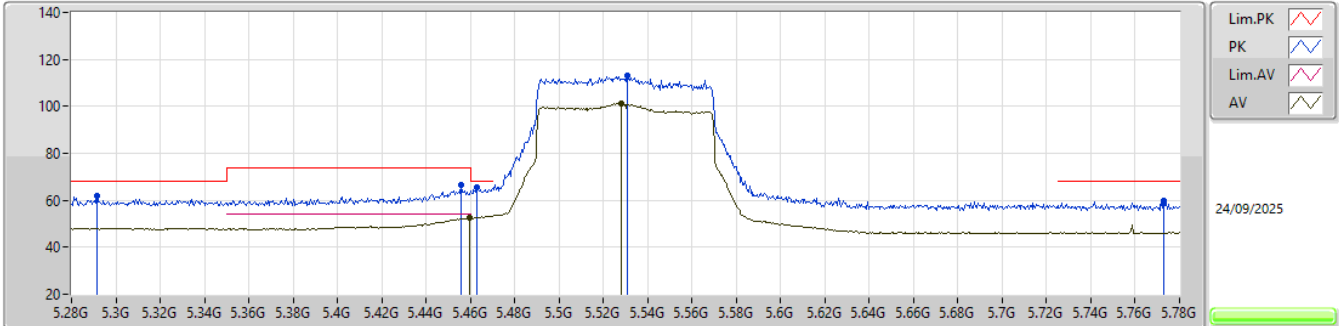


EUT_V_2TX
Setting 24
04-E-S-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2915G	61.66	68.20	-6.54	65.78	3	Vertical	194	2.33	-	31.23	8.45	43.80			
PK	5.456G	66.66	74.00	-7.34	70.21	3	Vertical	194	2.33	-	31.62	8.55	43.72			
AV	5.4595G	52.54	54.00	-1.46	56.07	3	Vertical	194	2.33	-	31.64	8.55	43.72			
PK	5.463G	65.34	68.20	-2.86	68.85	3	Vertical	194	2.33	-	31.65	8.56	43.72			
PK	5.531G	112.88	Inf	-Inf	116.18	3	Vertical	194	2.33	-	31.74	8.63	43.67			
AV	5.528G	101.08	Inf	-Inf	104.39	3	Vertical	194	2.33	-	31.74	8.62	43.67			
PK	5.773G	59.82	68.20	-8.38	62.27	3	Vertical	194	2.33	-	32.10	8.88	43.43			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5530MHz_TX

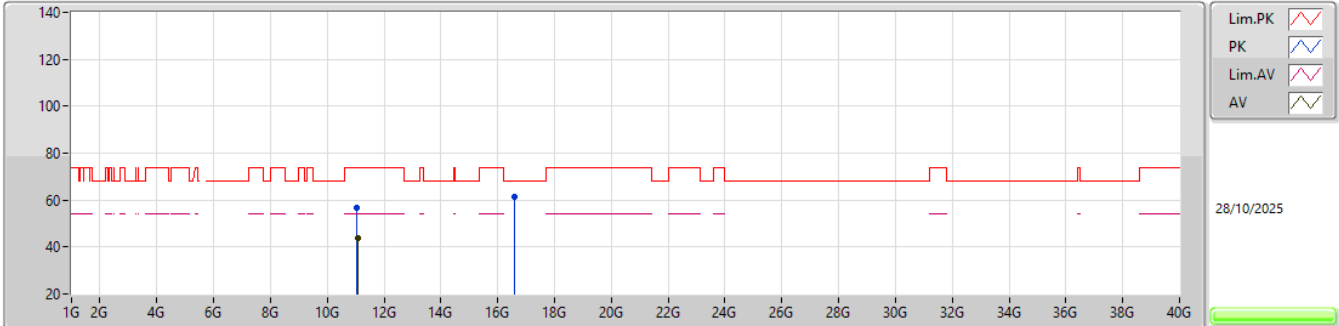


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05936G	56.91	74.00	-17.09	47.02	3	Vertical	353	2.37	-	39.86	12.92	42.89			
AV	11.06756G	43.66	54.00	-10.34	33.80	3	Vertical	353	2.37	-	39.83	12.92	42.89			
PK	16.59718G	61.26	68.20	-6.94	48.26	3	Vertical	50	1.79	-	38.91	16.27	42.18			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5530MHz_TX

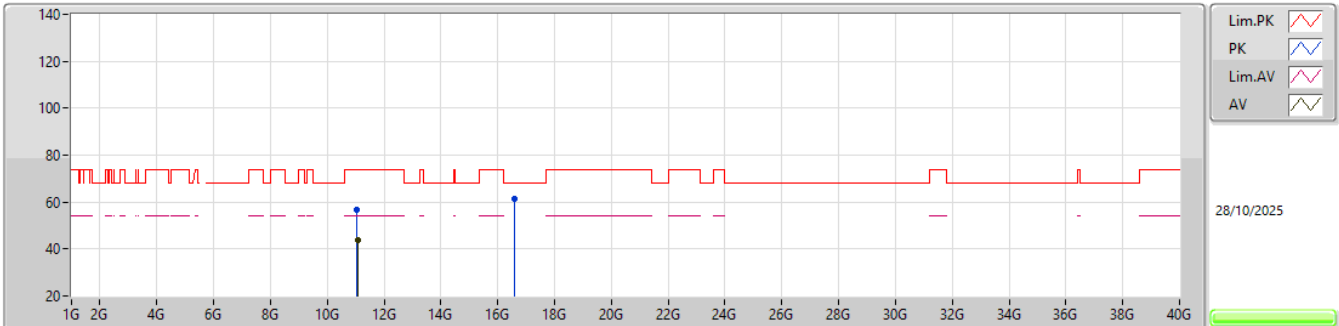


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05064G	56.89	74.00	-17.11	46.97	3	Horizontal	360	3.00	-	39.90	12.91	42.89			
AV	11.06994G	43.77	54.00	-10.23	33.91	3	Horizontal	360	3.00	-	39.82	12.93	42.89			
PK	16.58842G	61.40	68.20	-6.80	48.40	3	Horizontal	58	2.18	-	38.92	16.26	42.18			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5610MHz_TX

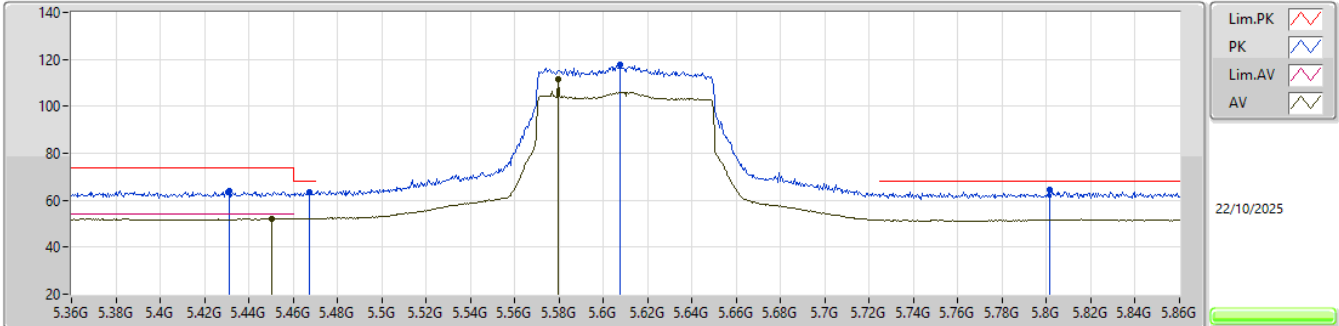


EUT V_2TX
Setting 25
05-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.431G	64.21	74.00	-9.79	57.87	3	Vertical	202	1.80	-	32.90	8.44	35.00			
PK	5.4675G	63.59	68.20	-4.61	57.18	3	Vertical	202	1.80	-	32.93	8.47	34.99			
AV	5.4505G	52.31	54.00	-1.69	45.95	3	Vertical	202	1.80	-	32.90	8.46	35.00			
PK	5.6075G	117.72	Inf	-Inf	111.16	3	Vertical	202	1.80	-	32.91	8.58	34.93			
AV	5.5795G	111.81	Inf	-Inf	105.26	3	Vertical	202	1.80	-	32.94	8.55	34.94			
PK	5.8015G	64.25	68.20	-3.95	56.49	3	Vertical	202	1.80	-	33.80	8.80	34.84			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5610MHz_TX

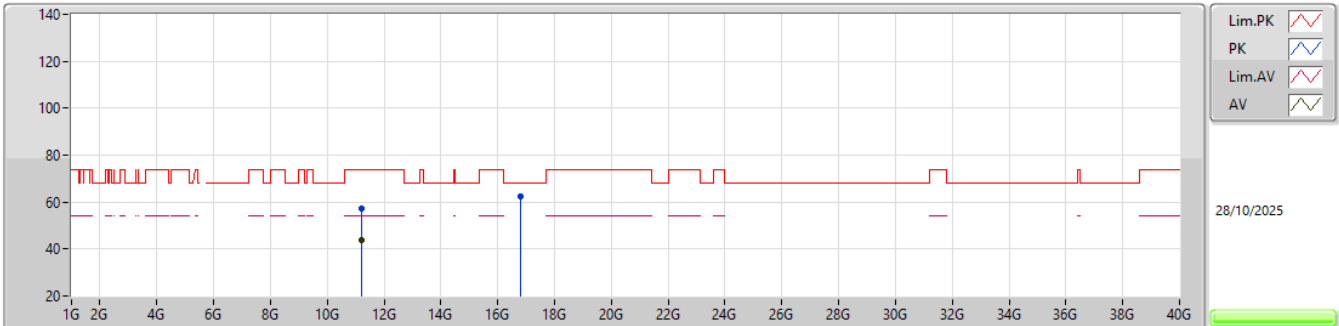EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21392G	57.47	74.00	-16.53	47.85	3	Vertical	108	1.80	-	39.43	13.03	42.84			
AV	11.21058G	43.61	54.00	-10.39	34.00	3	Vertical	108	1.80	-	39.42	13.03	42.84			
PK	16.82626G	62.21	68.20	-5.99	48.11	3	Vertical	315	1.80	-	40.11	16.29	42.30			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5610MHz_TX

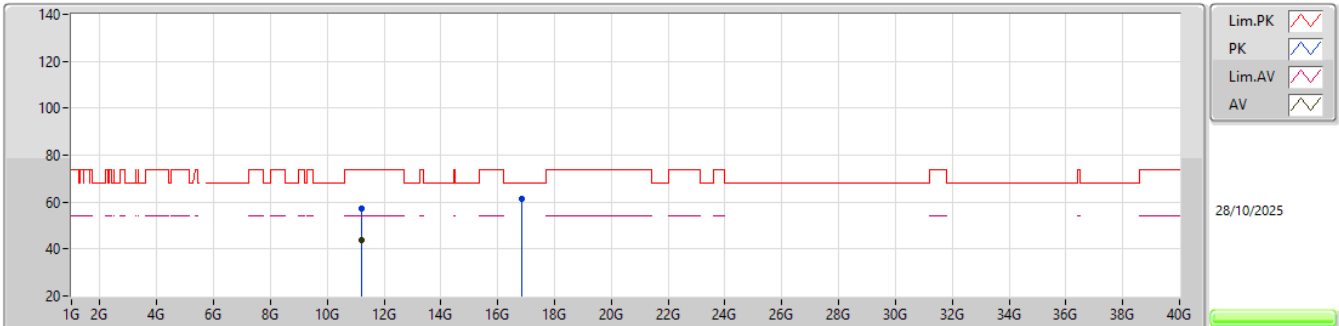EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21452G	57.36	74.00	-16.64	47.74	3	Horizontal	349	1.80	-	39.43	13.03	42.84			
AV	11.21014G	43.88	54.00	-10.12	34.27	3	Horizontal	349	1.80	-	39.42	13.03	42.84			
PK	16.83156G	61.35	68.20	-6.85	47.21	3	Horizontal	32	1.41	-	40.15	16.29	42.30			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

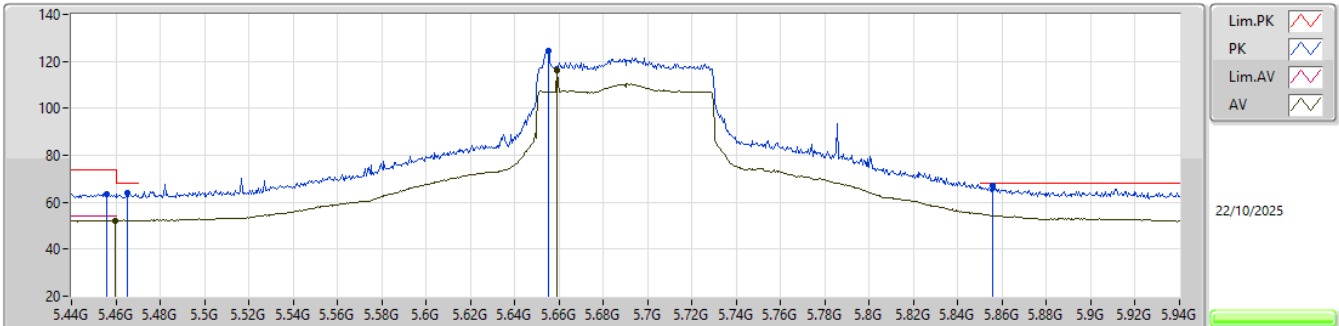


EUT_V_2TX
Setting 30
05-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.456G	63.24	74.00	-10.76	56.87	3	Vertical	195.1	1.80	-	32.91	8.46	35.00			
AV	5.4595G	52.32	54.00	-1.68	45.93	3	Vertical	195.1	1.80	-	32.92	8.46	34.99			
PK	5.465G	63.99	68.20	-4.21	57.58	3	Vertical	195.1	1.80	-	32.93	8.47	34.99			
PK	5.655G	124.36	Inf	-Inf	117.60	3	Vertical	195.1	1.80	-	33.04	8.63	34.91			
AV	5.659G	116.22	Inf	-Inf	109.41	3	Vertical	195.1	1.80	-	33.07	8.64	34.90			
PK	5.8555G	66.87	68.20	-1.33	58.90	3	Vertical	195.1	1.80	-	33.92	8.86	34.81			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

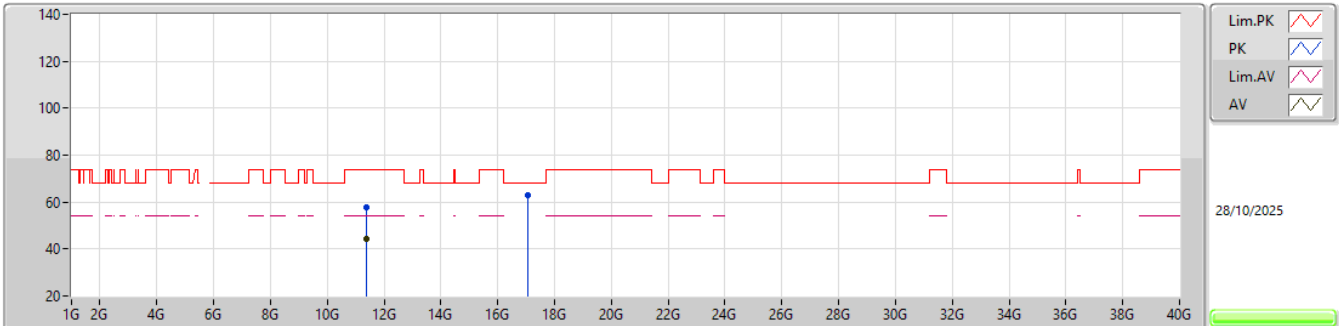


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.37044G	58.00	74.00	-16.00	47.80	3	Vertical	11	1.80	-	39.84	13.14	42.78			
AV	11.38474G	44.43	54.00	-9.57	34.19	3	Vertical	11	1.80	-	39.87	13.15	42.78			
PK	17.06462G	62.99	68.20	-5.21	49.09	3	Vertical	309	2.69	-	40.07	16.32	42.49			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

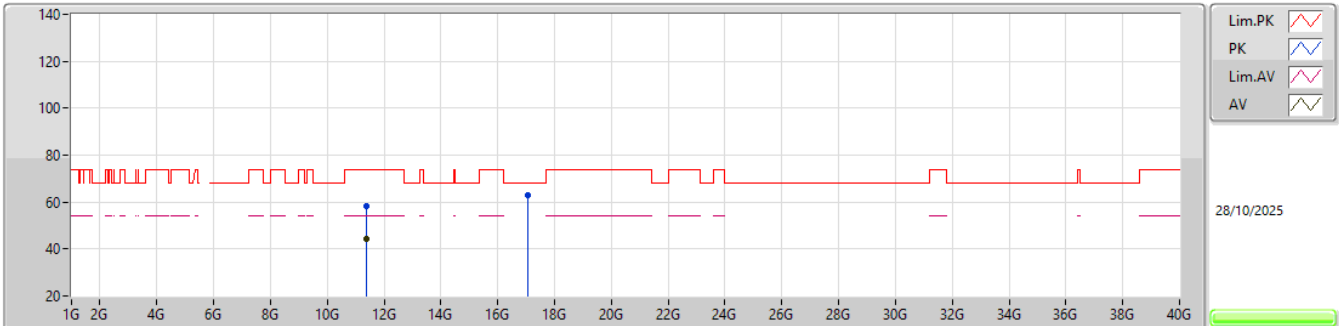


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37246G	58.13	74.00	-15.87	47.93	3	Horizontal	98	1.80	-	39.84	13.14	42.78			
AV	11.38456G	44.40	54.00	-9.60	34.16	3	Horizontal	98	1.80	-	39.87	13.15	42.78			
PK	17.0741G	63.07	68.20	-5.13	49.21	3	Horizontal	61	1.11	-	40.05	16.32	42.51			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5775MHz_TX

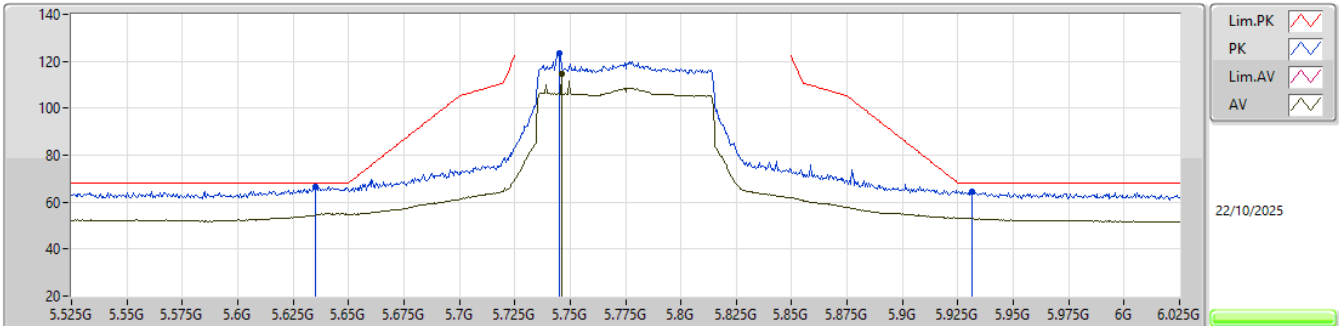


EUT Y_2TX
Setting 28
05-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.635G	66.69	68.20	-1.51	60.03	3	Vertical	170	1.80	-	32.97	8.61	34.92				
PK	5.745G	123.67	Inf	-Inf	116.21	3	Vertical	170	1.80	-	33.58	8.74	34.86				
AV	5.746G	114.43	Inf	-Inf	106.97	3	Vertical	170	1.80	-	33.58	8.74	34.86				
PK	5.9315G	64.71	68.20	-3.49	56.37	3	Vertical	170	1.80	-	34.16	8.95	34.77				

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5775MHz_TX

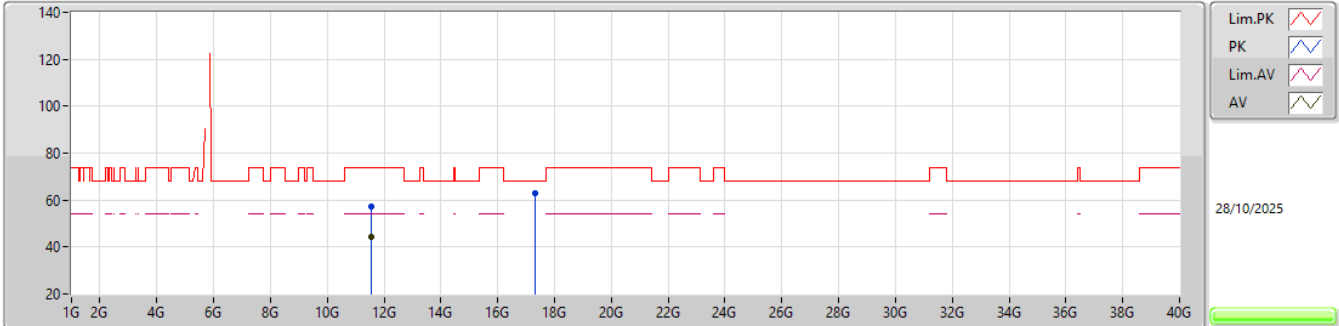


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.5544G	57.18	74.00	-16.82	46.85	3	Vertical	222	2.92	-	39.88	13.27	42.82				
AV	11.55792G	44.25	54.00	-9.75	33.93	3	Vertical	222	2.92	-	39.87	13.27	42.82				
PK	17.3273G	62.93	68.20	-5.27	48.46	3	Vertical	303	2.19	-	41.03	16.35	42.91				

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5775MHz_TX

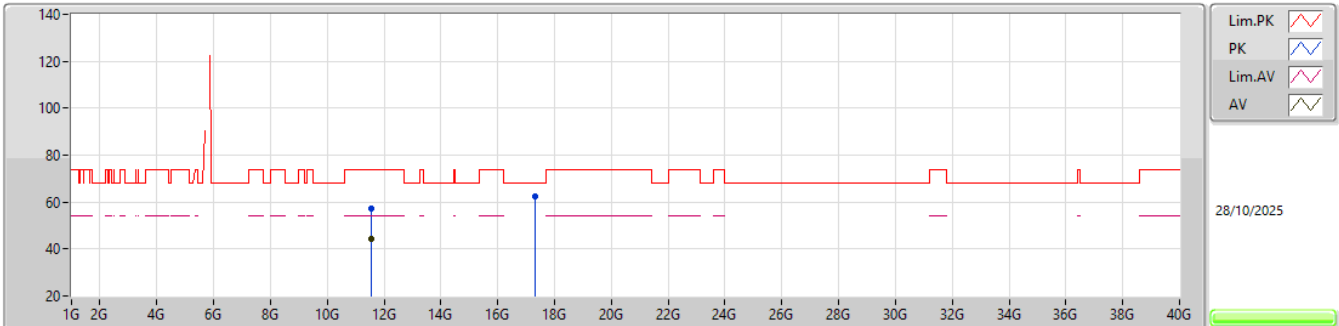EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55796G	57.46	74.00	-16.54	47.14	3	Horizontal	119	1.80	-	39.87	13.27	42.82			
AV	11.55476G	44.09	54.00	-9.91	33.76	3	Horizontal	119	1.80	-	39.88	13.27	42.82			
PK	17.3173G	62.44	68.20	-5.76	48.08	3	Horizontal	246	1.80	-	40.91	16.34	42.89			

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

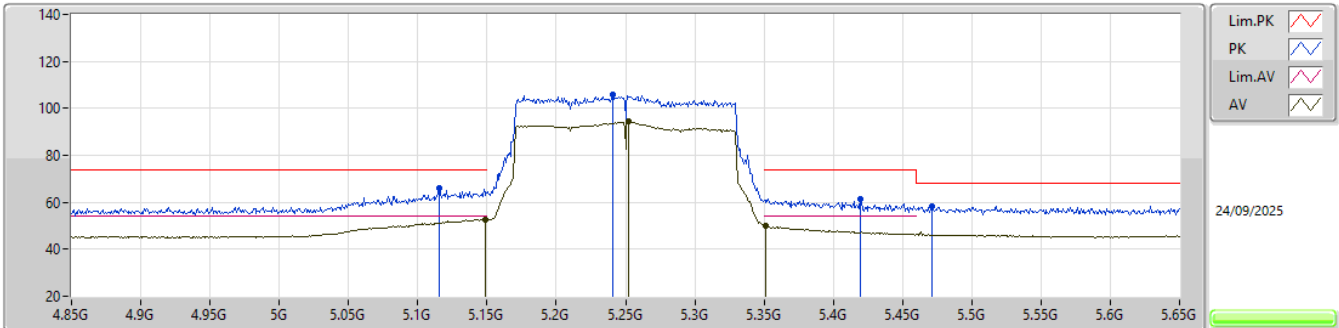


EUT_V_2TX
Setting 21
04-E-S-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1156G	66.20	74.00	-7.80	69.93	3	Vertical	135	1.80	-	31.79	8.37	43.89			
AV	5.1484G	52.74	54.00	-1.26	56.24	3	Vertical	135	1.80	-	31.99	8.39	43.88			
PK	5.2404G	105.79	Inf	-Inf	109.73	3	Vertical	135	1.80	-	31.46	8.43	43.83			
AV	5.2524G	94.25	Inf	-Inf	98.24	3	Vertical	135	1.80	-	31.39	8.44	43.82			
PK	5.4196G	61.58	74.00	-12.42	65.33	3	Vertical	135	1.80	-	31.48	8.51	43.74			
AV	5.3508G	49.81	54.00	-4.19	53.71	3	Vertical	135	1.80	-	31.40	8.47	43.77			
PK	5.4716G	58.10	68.20	-10.10	61.55	3	Vertical	135	1.80	-	31.69	8.57	43.71			

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

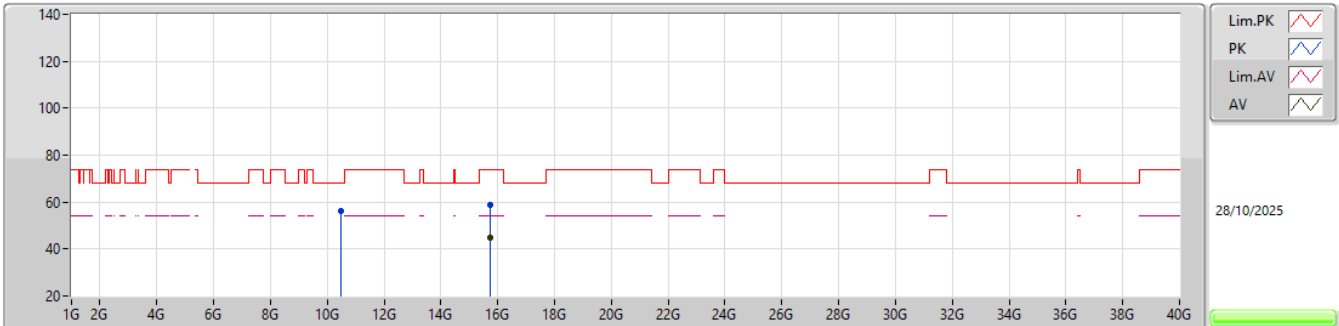


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50068G	55.99	68.20	-12.21	47.29	3	Vertical	158	1.80	-	39.40	12.52	43.22			
PK	15.75562G	59.00	74.00	-15.00	47.55	3	Vertical	94	1.74	-	37.68	16.19	42.42			
AV	15.7434G	44.96	54.00	-9.04	33.50	3	Vertical	94	1.74	-	37.69	16.18	42.41			

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

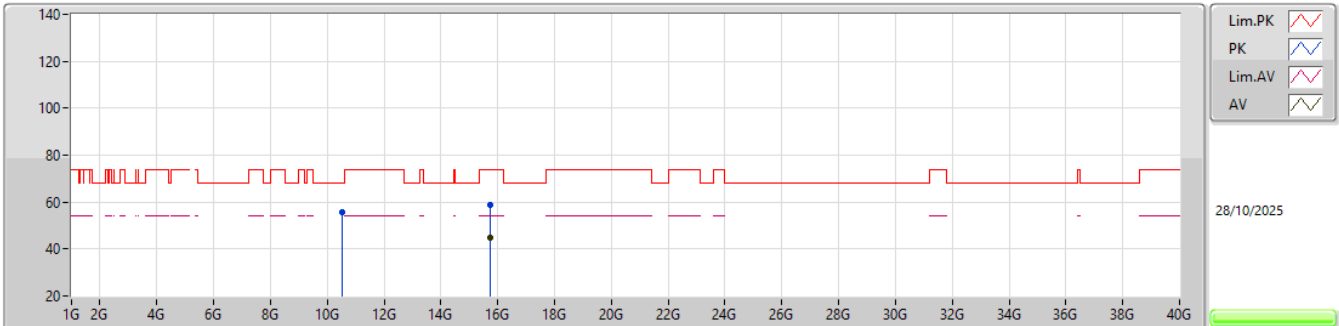


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50894G	55.70	68.20	-12.50	46.99	3	Horizontal	9	1.80	-	39.40	12.52	43.21			
PK	15.75536G	58.77	74.00	-15.23	47.32	3	Horizontal	2	1.80	-	37.68	16.19	42.42			
AV	15.7473G	45.04	54.00	-8.96	33.58	3	Horizontal	2	1.80	-	37.69	16.18	42.41			

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

5570MHz_TX

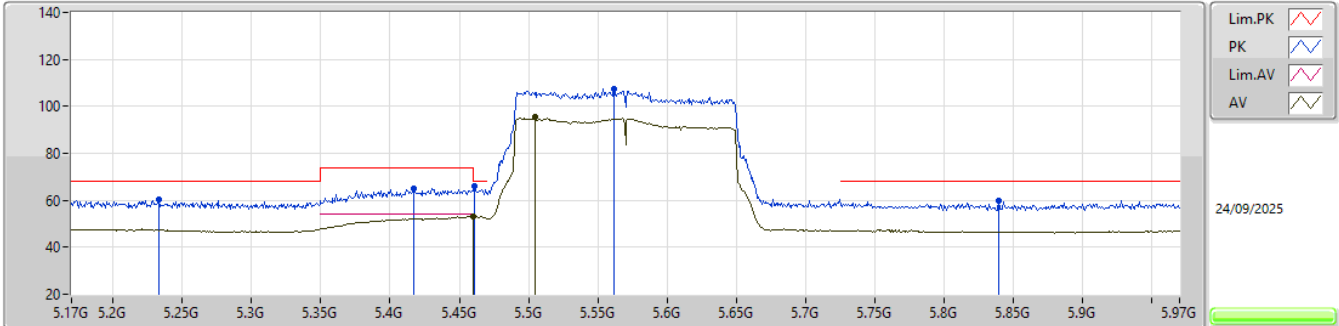


EUT_V_2TX
Setting 22
04-E-S-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2332G	60.16	68.20	-8.04	64.06	3	Vertical	139	1.80	-	31.50	8.43	43.83			
PK	5.4172G	64.98	74.00	-9.02	68.74	3	Vertical	139	1.80	-	31.47	8.51	43.74			
PK	5.4612G	65.92	68.20	-2.28	69.45	3	Vertical	139	1.80	-	31.64	8.55	43.72			
AV	5.4596G	52.97	54.00	-1.03	56.50	3	Vertical	139	1.80	-	31.64	8.55	43.72			
AV	5.5044G	95.36	Inf	-Inf	98.67	3	Vertical	139	1.80	-	31.79	8.60	43.70			
PK	5.562G	107.46	Inf	-Inf	110.76	3	Vertical	139	1.80	-	31.68	8.66	43.64			
PK	5.8396G	59.76	68.20	-8.44	62.06	3	Vertical	139	1.80	-	32.10	8.96	43.36			

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


5570MHz_TX

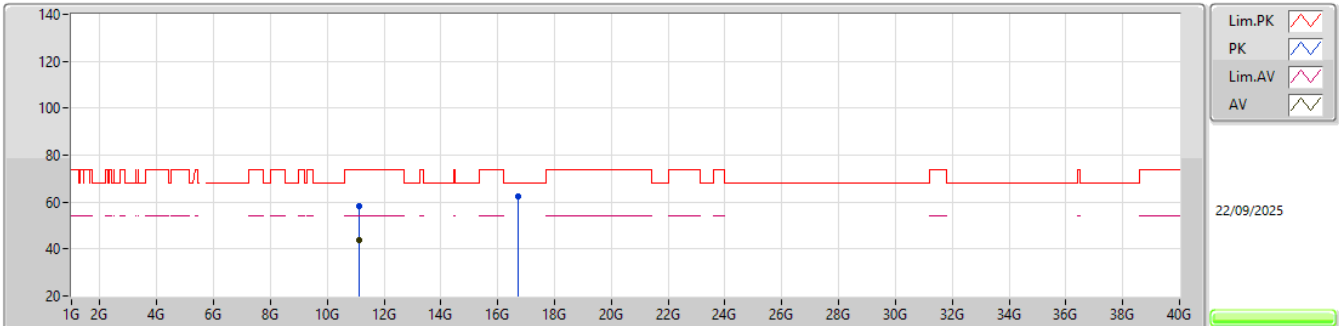EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.13494G	58.03	74.00	-15.97	48.36	3	Vertical	153	1.53	-	39.56	12.97	42.86			
AV	11.13456G	44.05	54.00	-9.95	34.38	3	Vertical	153	1.53	-	39.56	12.97	42.86			
PK	16.7032G	62.54	68.20	-5.66	49.28	3	Vertical	-0	1.14	-	39.22	16.28	42.24			

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

5570MHz_TX

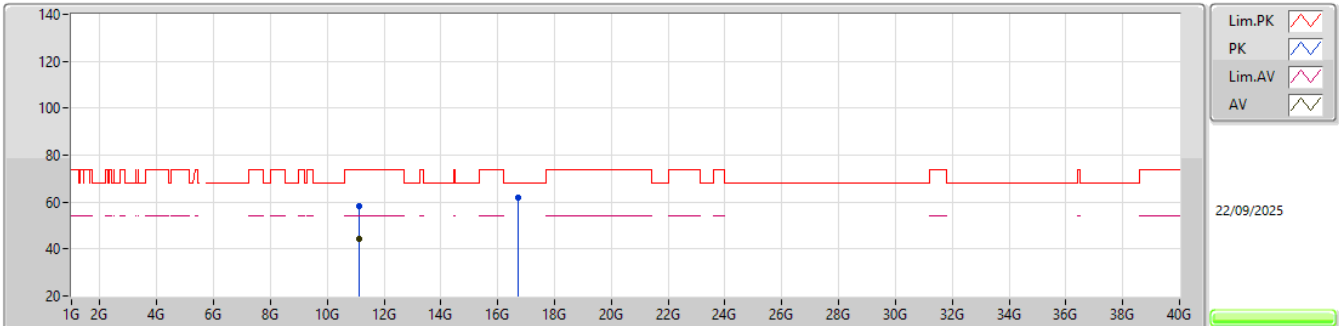


EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.13832G	58.10	74.00	-15.90	48.44	3	Horizontal	360	2.08	-	39.55	12.97	42.86			
AV	11.1405G	44.14	54.00	-9.86	34.48	3	Horizontal	360	2.08	-	39.54	12.98	42.86			
PK	16.70068G	61.83	68.20	-6.37	48.58	3	Horizontal	292	2.52	-	39.20	16.28	42.23			

5.47-5.725GHz_be240,BF_240MHz_Nss1,(MCS0)_2TX

5610MHz Straddle 5.47-5.725GHz_TX

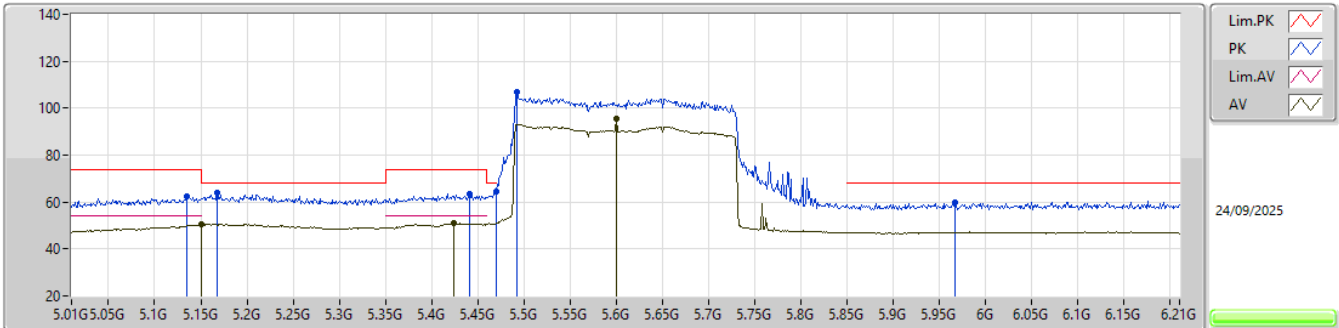


EUT Y_2TX
Setting 22
04-E-5-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1348G	62.30	74.00	-11.70	65.89	3	Vertical	11	1.80	-	31.91	8.38	43.88			
AV	5.15G	50.27	54.00	-3.73	53.76	3	Vertical	11	1.80	-	32.00	8.39	43.88			
PK	5.1672G	63.85	68.20	-4.35	67.42	3	Vertical	11	1.80	-	31.90	8.40	43.87			
PK	5.4408G	63.62	74.00	-10.38	67.26	3	Vertical	11	1.80	-	31.56	8.53	43.73			
AV	5.424G	50.87	54.00	-3.13	54.59	3	Vertical	11	1.80	-	31.50	8.52	43.74			
PK	5.4696G	64.51	68.20	-3.69	67.99	3	Vertical	11	1.80	-	31.68	8.56	43.72			
PK	5.4924G	106.93	Inf	-Inf	110.27	3	Vertical	11	1.80	-	31.77	8.59	43.70			
AV	5.6004G	95.33	Inf	-Inf	98.63	3	Vertical	11	1.80	-	31.60	8.70	43.60			
PK	5.9664G	60.07	68.20	-8.13	61.87	3	Vertical	11	1.80	-	32.33	9.10	43.23			

5.47-5.725GHz_be240,BF_240MHz_Nss1,(MCS0)_2TX


5610MHz Straddle 5.47-5.725GHz_TX

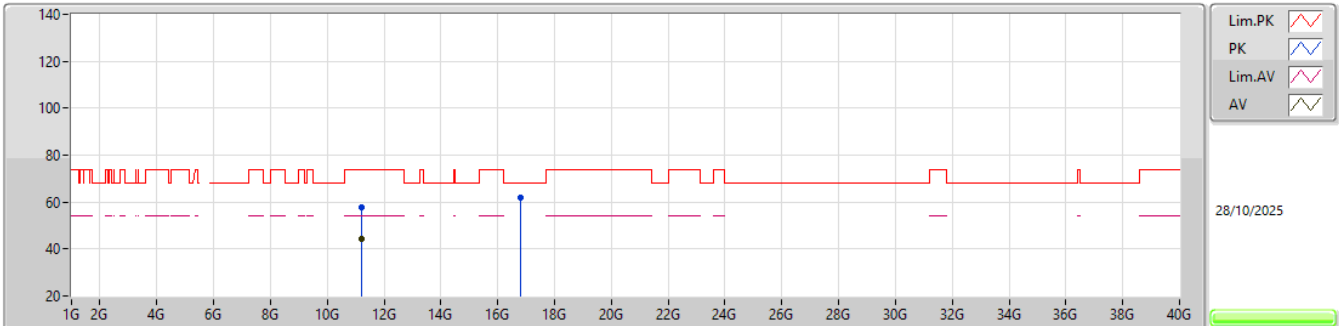EUT Y_2TX
Setting 30
04-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22156G	57.79	74.00	-16.21	48.15	3	Vertical	40	1.80	-	39.44	13.03	42.83			
AV	11.21034G	44.08	54.00	-9.92	34.47	3	Vertical	40	1.80	-	39.42	13.03	42.84			
PK	16.82626G	61.76	68.20	-6.44	47.66	3	Vertical	360	1.80	-	40.11	16.29	42.30			

5.47-5.725GHz_be240,BF_240MHz_Nss1,(MCS0)_2TX

5610MHz Straddle 5.47-5.725GHz_TX

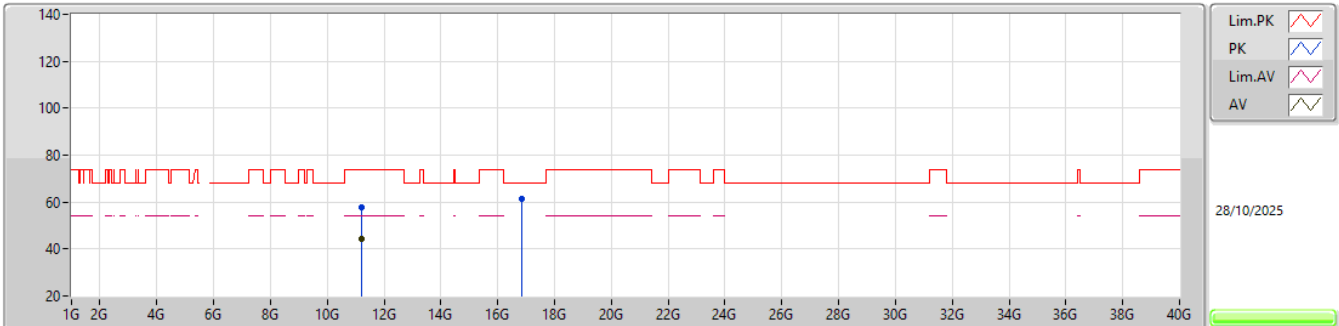EUT Y_2TX
Setting 30
04-E-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21608G	57.83	74.00	-16.17	48.21	3	Horizontal	246	1.29	-	39.43	13.03	42.84			
AV	11.2105G	44.11	54.00	-9.89	34.50	3	Horizontal	246	1.29	-	39.42	13.03	42.84			
PK	16.82782G	61.43	68.20	-6.77	47.32	3	Horizontal	232	1.08	-	40.12	16.29	42.30			



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	1.73584G	25.68	54.00	-28.32	Vertical

Mode 1

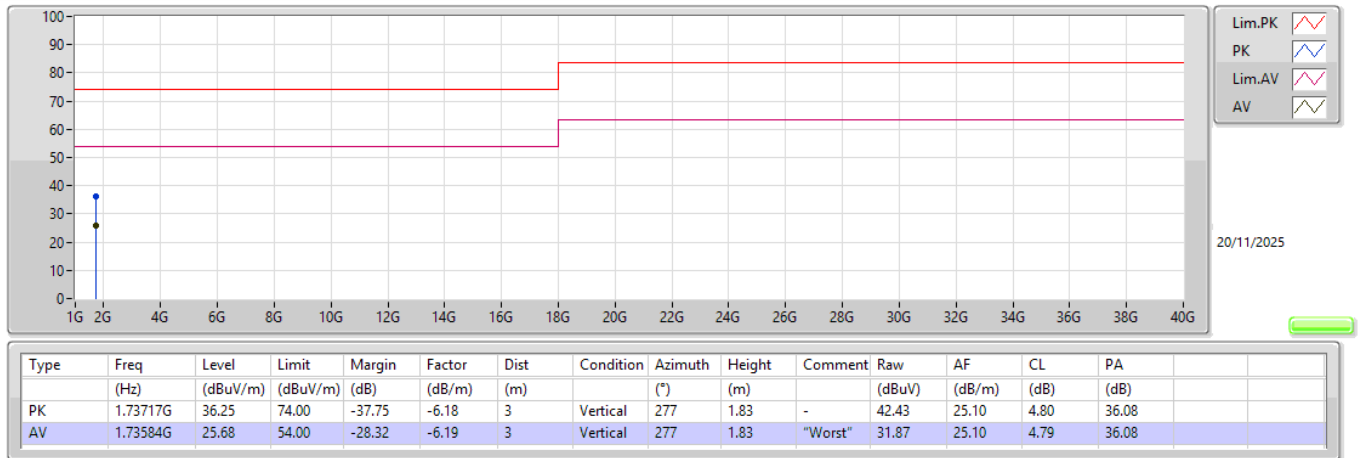

Mode 1

