



1 Antenna Test Result

1.1 Test Information

Brand Name	
Model Name	
Test Standard	ANSI C63.5: 2006
Applicant	
Applicant Address	
Sample Received	Apr. 18, 2013
Test Date	Apr. 18, 2013
Test Result No.	340944-z
Remark	

1.2 Testing Location

Testing Location			
☐	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055	
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085	
Testing Site No.			
05CH01-CB		-	-

1.3 Test Mode

The following tables are showing the test modes as the worst cases and recorded in this report.

Antenna Test Suites			
Description	Polarization		Test Channel
	Horizontal	Vertical	
Antenna Gain	✓	✓	BMT

Note: Test Channel: B (Bottom channel), M (Middle channel), and T (Top channel).



1.4 Test Frequency

EUT Channel	B	M	T
Frequency	2.402GHz	2.441GHz	2.48GHz


Note: Test Channel: B (Bottom channel), M (Middle channel), and T (Top channel).

1.5 Test Result of Antenna Gain

Polarization	Horizontal & Vertical	Temperature :	24 °C
Test Engineer :	kenneth	Relative Humidity :	61 %

Test Freq	Peak Gain (dBi)	Average Gain (dBi)	Beamwidth (°)	Plane
2.402GHz	PK 0.97 dBi	AV -5.35 dBi	Beam 71 °	Horizontal
2.441GHz	PK 0.52 dBi	AV -6.15 dBi	Beam 69 °	Horizontal
2.48GHz	PK 0.28 dBi	AV -7.2 dBi	Beam 51 °	Horizontal
2.402GHz	PK -4.47 dBi	AV -8.38 dBi	Beam 279 °	Vertical
2.441GHz	PK -6.08 dBi	AV -9.85 dBi	Beam 231 °	Vertical
2.48GHz	PK -7.12 dBi	AV -11.89 dBi	Beam 360 °	Vertical

1.6 Test Result of Antenna Gain Pattern

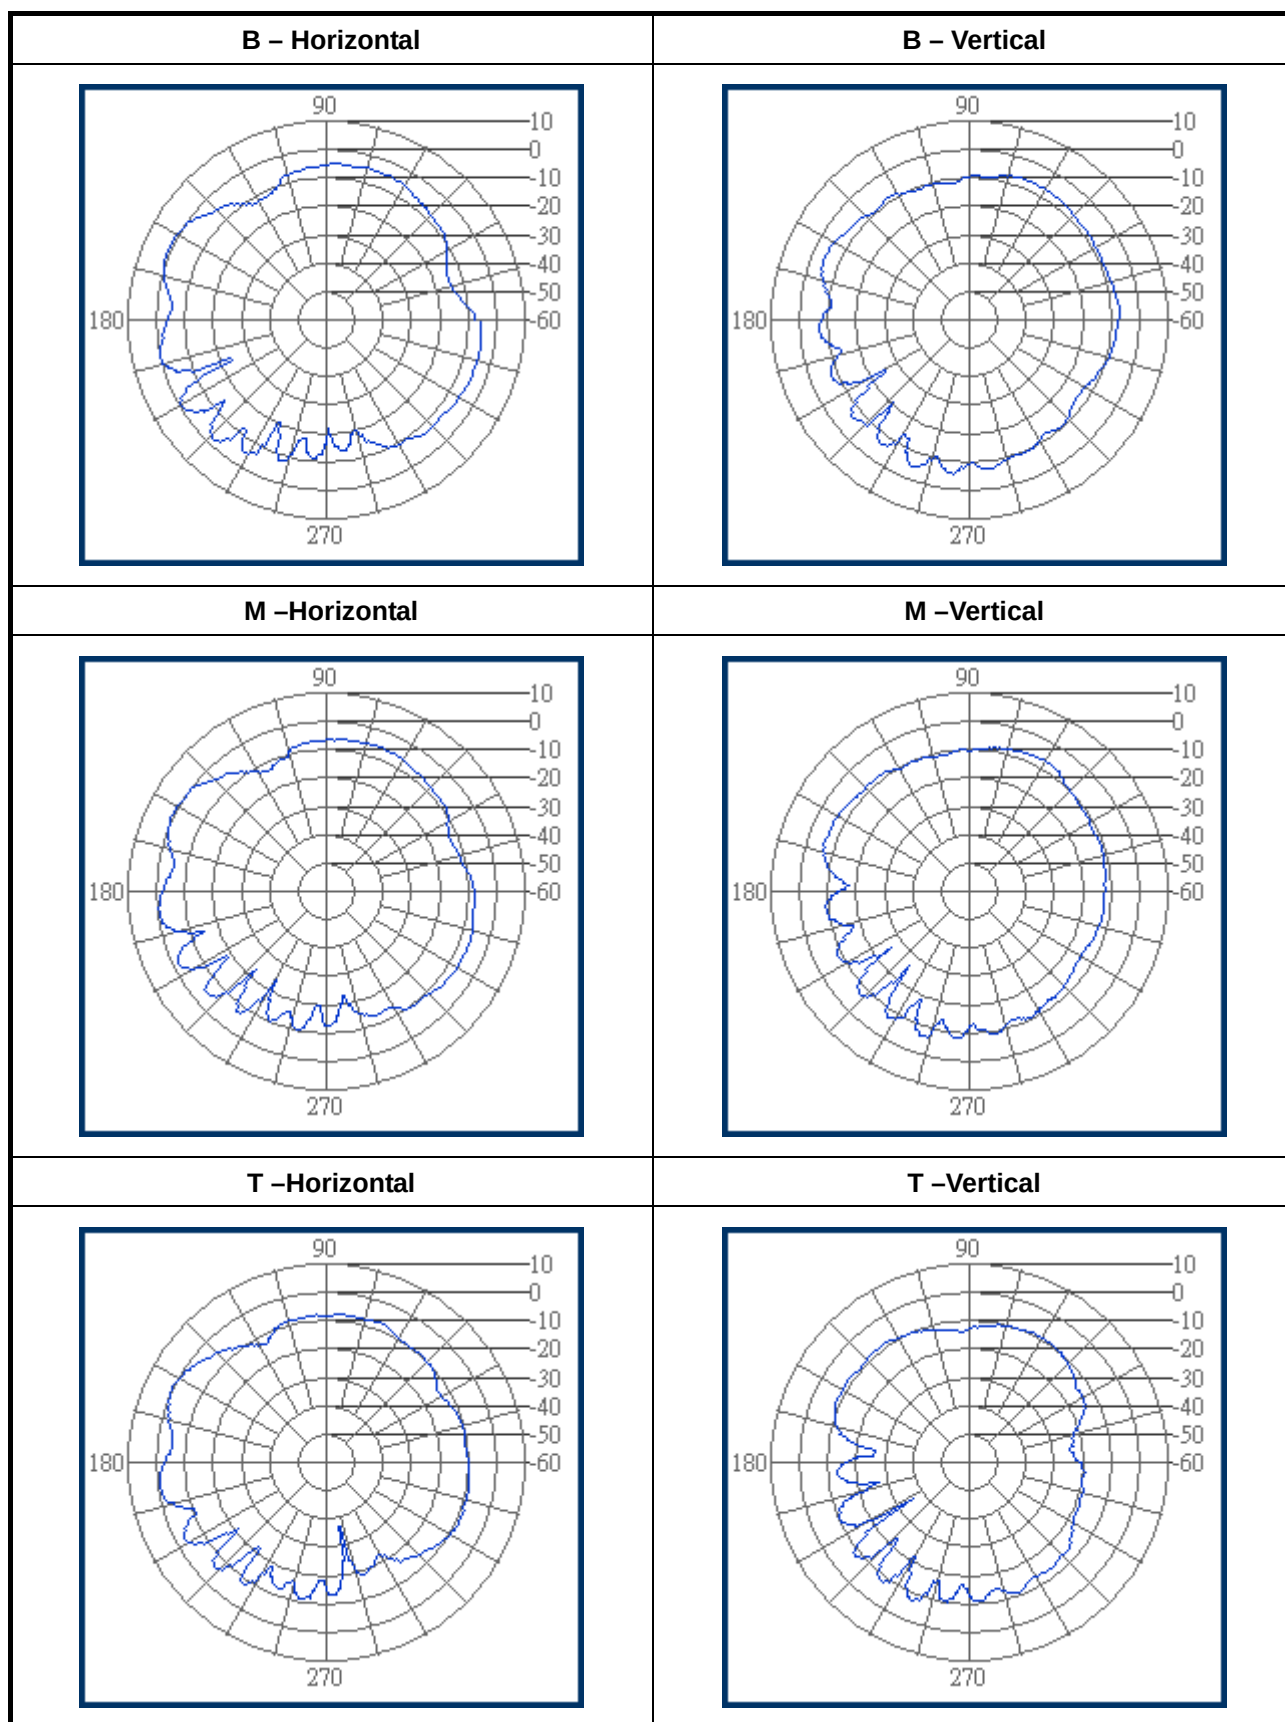

[illegible]



Antenna Test Result

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Until	Remark