

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W17OR-D004
AGR No. : A178A-264
Applicant : HUMAX Co., Ltd.
Address : HUMAX Village, 11-4, Sunae-dong, Bundang-gu, Seongnam city, Gyeonggi-do,
463-825, South Korea
Manufacturer : HUMAX Co., Ltd.
Address : HUMAX Village, 11-4, Sunae-dong, Bundang-gu, Seongnam city, Gyeonggi-do,
463-825, South Korea
Type of Equipment : Wi-Fi Router
FCC ID. : O6ZT9
Model Name : QUANTUM T9
Multiple Model Name : QUANTUM T7, QUANTUM T5
Serial number : N/A
Total page of Report : 227 pages (including this page)
Date of Incoming : September 11, 2017
Date of issue : October 10, 2017

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART E Section 15.407**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Ki-Hong, Nam / Asst, Chief Engineer
ONETECH Corp.

Approved by:



Keun-Young, Choi / Vice President
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	8
2. TEST SUMMARY.....	9
2.1 TEST ITEMS AND RESULTS.....	9
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	9
2.3 RELATED SUBMITTAL(S)/ GRANT(S)	9
2.4 PURPOSE OF THE TEST	9
2.5 TEST METHODOLOGY	9
2.6 TEST FACILITY	9
3. GENERAL INFORMATION.....	10
3.1 PRODUCT DESCRIPTION.....	10
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	12
4. EUT MODIFICATIONS	12
5. SYSTEM TEST CONFIGURATION.....	13
5.1 JUSTIFICATION	13
5.2 PERIPHERAL EQUIPMENT.....	13
5.4 CONFIGURATION OF TEST SYSTEM	18
5.5 ANTENNA REQUIREMENT	18
6. PRELIMINARY TEST	19
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	19
6.2 GENERAL RADIATED EMISSIONS TESTS.....	19
7. MINIMUM 26 DB BANDWIDTH.....	20
7.1 OPERATING ENVIRONMENT	20
7.2 TEST SET-UP	20
7.3 TEST EQUIPMENT USED	20
7.4 TEST DATA FOR 802.11A RLAN MODE.....	21
7.4.1 Test data for Antenna 0	21
7.4.2 Test data for Antenna 1	26
7.4.3 Test data for Antenna 2	31
7.4.4 Test data for Antenna 3	36
7.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	41
7.5.1 Test data for Antenna 0	41

7.5.2 Test data for Antenna 1	46
7.5.3 Test data for Antenna 2	51
7.5.4 Test data for Antenna 3	56
7.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	61
7.6.1 Test data for Antenna 0	61
7.6.2 Test data for Antenna 1	64
7.6.3 Test data for Antenna 2	67
7.6.4 Test data for Antenna 3	70
7.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	73
7.7.1 Test data for Antenna 0	73
7.7.2 Test data for Antenna 1	75
7.7.3 Test data for Antenna 2	77
7.7.4 Test data for Antenna 3	79
8. 6 DB BANDWIDTH	81
8.1 OPERATING ENVIRONMENT	81
8.2 TEST SET-UP	81
8.3 TEST EQUIPMENT USED	81
8.4 TEST DATA FOR 802.11A RLAN MODE	82
8.4.1 Test data for Antenna 0	82
8.4.2 Test data for Antenna 1	84
8.4.3 Test data for Antenna 2	86
8.4.4 Test data for Antenna 3	88
8.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	90
8.5.1 Test data for Antenna 0	90
8.5.2 Test data for Antenna 1	92
8.5.3 Test data for Antenna 2	94
8.5.4 Test data for Antenna 3	96
8.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	98
8.6.1 Test data for Antenna 0	98
8.6.2 Test data for Antenna 1	100
8.6.3 Test data for Antenna 2	102
8.6.4 Test data for Antenna 3	104
8.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	106
8.7.1 Test data for Antenna 0	106
8.7.2 Test data for Antenna 1	107
8.7.3 Test data for Antenna 2	108
8.7.4 Test data for Antenna 3	109

9 MAXIMUM PEAK OUTPUT POWER.....	110
9.1 OPERATING ENVIRONMENT	110
9.2 TEST SET-UP	110
9.3 TEST EQUIPMENT USED	110
9.4 TEST DATA FOR 802.11A RLAN MODE.....	111
<i>9.4.1 Test data for Antenna 0</i>	<i>111</i>
<i>9.4.2 Test data for Antenna 1</i>	<i>111</i>
<i>9.4.3 Test data for Antenna 2</i>	<i>112</i>
<i>9.4.4 Test data for Antenna 3</i>	<i>112</i>
9.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	113
<i>9.5.1 Test data for Antenna 0</i>	<i>113</i>
<i>9.5.2 Test data for Antenna 1</i>	<i>113</i>
<i>9.5.3 Test data for Antenna 2</i>	<i>114</i>
<i>9.5.4 Test data for Antenna 3</i>	<i>114</i>
<i>9.5.5 Test data for Multiple Transmit</i>	<i>115</i>
9.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	116
<i>9.6.1 Test data for Antenna 0</i>	<i>116</i>
<i>9.6.2 Test data for Antenna 1</i>	<i>116</i>
<i>9.6.3 Test data for Antenna 2</i>	<i>117</i>
<i>9.6.4 Test data for Antenna 3</i>	<i>117</i>
<i>9.6.5 Test data for Multiple Transmit</i>	<i>118</i>
9.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	119
<i>9.7.1 Test data for Antenna 0</i>	<i>119</i>
<i>9.7.2 Test data for Antenna 1</i>	<i>119</i>
<i>9.7.3 Test data for Antenna 2</i>	<i>119</i>
<i>9.7.4 Test data for Antenna 3</i>	<i>120</i>
<i>9.7.5 Test data for Multiple Transmit</i>	<i>120</i>
10. PEAK POWER SPECTRUL DENSITY	121
10.1 OPERATING ENVIRONMENT	121
10.2 TEST SET-UP	121
10.3 TEST EQUIPMENT USED	121
10.4 TEST DATA FOR 802.11A RLAN MODE.....	122
<i>10.4.1 Test data for Antenna 0</i>	<i>122</i>
<i>10.4.2 Test data for Antenna 1</i>	<i>127</i>
<i>10.4.3 Test data for Antenna 2</i>	<i>132</i>
<i>10.4.4 Test data for Antenna 3</i>	<i>137</i>
10.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	142

10.5.1 Test data for Antenna 0	142
10.5.2 Test data for Antenna 1	147
10.5.3 Test data for Antenna 2	152
10.5.4 Test data for Antenna 3	157
10.5.5 Test data for Multiple Transmit	162
10.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	163
10.6.1 Test data for Antenna 0	163
10.6.2 Test data for Antenna 1	166
10.6.3 Test data for Antenna 2	169
10.6.4 Test data for Antenna 3	172
10.6.5 Test data for Multiple Transmit	175
10.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE	176
10.7.1 Test data for Antenna 0	176
10.7.2 Test data for Antenna 1	178
10.7.3 Test data for Antenna 2	180
10.7.4 Test data for Antenna 3	182
10.7.5 Test data for Multiple Transmit	184
11. FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	185
11.1 OPERATING ENVIRONMENT	185
11.2 TEST SET-UP	185
11.3 TEST EQUIPMENT USED	185
11.4 TEST DATA FOR U-NII-1	186
11.5 TEST DATA FOR U-NII-3	187
12. FREQUENCY STABILITY WITH VOLTAGE VARIATION.....	188
12.1 OPERATING ENVIRONMENT	188
12.2 TEST SET-UP	188
12.3 TEST EQUIPMENT USED	188
12.4 TEST DATA FOR U-NII-1	189
12.5 TEST DATA FOR U-NII-3	189
13. RADIATED SPURIOUS EMISSIONS.....	190
13.1 OPERATING ENVIRONMENT	190
13.2 TEST SET-UP	190
13.3 TEST EQUIPMENT USED	190
13.5 TEST DATA FOR BELOW 30 MHz.....	191
13.6 TEST DATA FOR 30 MHz ~ 1 GHz	192
13.6.1 Test data for Frequency U-NII-1	192

13.6.2 Test data for Frequency U-NII-3	193
13.7 TEST DATA FOR FREQUENCY U-NII-1	194
13.7.1 Test data for 802.11a RLAN Mode	194
13.7.2 Test data for 802.11n_HT20 RLAN Mode (4 Tx Multiple Transmit (Worst case))	198
13.7.3 Test data for 802.11n_HT40 RLAN Mode (4 Tx Multiple Transmit (Worst case))	199
13.7.4 Test data for 802.11ac_HT80 RLAN Mode (4 Tx Multiple Transmit (Worst case))	200
13.8 TEST DATA FOR FREQUENCY U-NII-3	201
13.8.1 Test data for 802.11a RLAN Mode	201
13.8.2 Test data for 802.11n_HT20 RLAN Mode (4 Tx Multiple Transmit (Worst case))	205
13.8.3 Test data for 802.11n_HT40 RLAN Mode (4 Tx Multiple Transmit (Worst case))	206
13.8.4 Test data for 802.11ac_HT80 RLAN Mode (4 Tx Multiple Transmit (Worst case))	207
14. RADIATED RESTRICTED BAND EDGE MEASUREMENTS	208
14.1 OPERATING ENVIRONMENT	208
14.2 TEST SET-UP	208
14.3 TEST EQUIPMENT USED	208
14.4 TEST DATA FOR FREQUENCY U-NII-1	209
14.4.1 Test data for 802.11a RLAN Mode	209
14.4.2 Test data for 802.11n_HT20 RLAN Mode (4 Tx Multiple Transmit (Worst case))	213
14.4.3 Test data for 802.11n_HT40 RLAN Mode (4 Tx Multiple Transmit (Worst case))	214
14.4.4 Test data for 802.11ac_HT80 RLAN Mode (4 Tx Multiple Transmit (Worst case))	215
14.5 TEST DATA FOR FREQUENCY U-NII-3	216
14.5.1 Test data for 802.11a RLAN Mode	216
14.5.2 Test data for 802.11n_HT20 RLAN Mode (4 Tx Multiple Transmit (Worst case))	220
14.5.3 Test data for 802.11n_HT40 RLAN Mode (4 Tx Multiple Transmit (Worst case))	221
14.5.4 Test data for 802.11ac_HT80 RLAN Mode (4 Tx Multiple Transmit (Worst case))	222
15. CONDUCTED EMISSION TEST	223
15.1 OPERATING ENVIRONMENT	223
15.2 TEST SET-UP	223
15.3 TEST EQUIPMENT USED	223
15.4 TEST DATA FOR FREQUENCY U-NII-1	224
15.4 TEST DATA FOR FREQUENCY U-NII-3	226

REVISION HISTORY

Issued Report No.	Issued Date	Revisions	Effect Section
W17OR-D004	October 10, 2017	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

Applicant : HUMAX Co., Ltd.

Address : HUMAX Village, 11-4, Sunae-dong, Bundang-gu, Seongnam city, Gyeonggi-do, 463-825, South Korea

Contact Person : Inseok, Seo / Senior Engineer

Telephone No. : +82-31-776-6400

FCC ID : O6ZT9

Model Name : QUANTUM T9

Brand Name : **HUMAX**

Serial Number : N/A

Date : October 10, 2017

EQUIPMENT CLASS	Unlicensed National Information Infrastructure(UNII)
E.U.T. DESCRIPTION	Wi-Fi Router
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E Section 15.407 KDB 789033 D01 General UNII Test Procedures
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407(a)	26 dB Bandwidth	PASS
	99 % Occupied Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	Met the Limit / PASS
15.407(a)	Peak Power Spectral Density	Met the Limit / PASS
15.407(a)	Peak Excursion	Met the Limit / PASS
15.407(g)	Frequency Stability	Met the Limit / PASS
15.407(b)	Undesirable Emissions	Met the Limit / PASS
15.205, 15.407(b)	General Field Strength Limits (Restricted Bandsand Radiated Emission Limits)	Met the Limit / PASS
15.207	AC Conducted Emissions 150 kHz-30 MHz	Met the Limit / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART E Section 15.407

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

3. GENERAL INFORMATION

3.1 Product Description

The HUMAX Co., Ltd., Model QUANTUM T9 (referred to as the EUT in this report) is a Wi-Fi Router. Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Wi-Fi Router		
FREQUENCY RANGE	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))	
		2 422 MHz ~ 2 452 MHz (802.11n(HT40))	
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
			5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
			5 210 MHz (802.11ac(VHT80))
		5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
			5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
			5 775 MHz (802.11ac(VHT80))
MAX. RF OUTPUT POWER	WLAN 2.4 GHz Band	Antenna 0	Wi-Fi 802.11b (22.45 dBm) Wi-Fi 802.11g (22.39 dBm) Wi-Fi 802.11n(HT20) (16.46 dBm) Wi-Fi 802.11n(HT40) (16.54 dBm)
		Antenna 1	Wi-Fi 802.11b (22.49 dBm) Wi-Fi 802.11g (22.34 dBm) Wi-Fi 802.11n(HT20) (16.40 dBm) Wi-Fi 802.11n(HT40) (16.52 dBm)
		Antenna 2	Wi-Fi 802.11b (22.47 dBm) Wi-Fi 802.11g (22.45 dBm) Wi-Fi 802.11n(HT20) (16.48 dBm) Wi-Fi 802.11n(HT40) (16.55 dBm)
		Multiple transmit	Wi-Fi 802.11n(HT20) (21.22 dBm) Wi-Fi 802.11n(HT40) (21.31 dBm)

MAX. RF OUTPUT POWER	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	Antenna 0	Wi-Fi 802.11a (18.70 dBm) Wi-Fi 802.11n(HT20) (8.50 dBm) Wi-Fi 802.11n(HT40) (8.57 dBm) Wi-Fi 802.11ac(HT80) (11.44 dBm)
			Antenna 1	Wi-Fi 802.11a (18.56 dBm) Wi-Fi 802.11n(HT20) (8.53 dBm) Wi-Fi 802.11n(HT40) (8.62 dBm) Wi-Fi 802.11ac(HT80) (11.38 dBm)
			Antenna 2	Wi-Fi 802.11a (18.64 dBm) Wi-Fi 802.11n(HT20) (8.47 dBm) Wi-Fi 802.11n(HT40) (8.55 dBm) Wi-Fi 802.11ac(HT80) (11.40 dBm)
			Antenna 3	Wi-Fi 802.11a (18.66 dBm) Wi-Fi 802.11n(HT20) (8.55 dBm) Wi-Fi 802.11n(HT40) (8.41 dBm) Wi-Fi 802.11ac(HT80) (11.50 dBm)
			Multiple transmit	Wi-Fi 802.11n(HT20) (14.53 dBm) Wi-Fi 802.11n(HT40) (14.56 dBm) Wi-Fi 802.11ac(HT80) (17.45 dBm)
		5 725 MHz ~ 5 850 MHz Band	Antenna 0	Wi-Fi 802.11a (22.39 dBm) Wi-Fi 802.11n(HT20) (13.27 dBm) Wi-Fi 802.11n(HT40) (13.01 dBm) Wi-Fi 802.11ac(HT80) (12.86 dBm)
			Antenna 1	Wi-Fi 802.11a (22.33 dBm) Wi-Fi 802.11n(HT20) (13.31 dBm) Wi-Fi 802.11n(HT40) (13.05 dBm) Wi-Fi 802.11ac(HT80) (12.92 dBm)
			Antenna 2	Wi-Fi 802.11a (22.43 dBm) Wi-Fi 802.11n(HT20) (13.25 dBm) Wi-Fi 802.11n(HT40) (13.02 dBm) Wi-Fi 802.11ac(HT80) (12.81 dBm)
			Antenna 3	Wi-Fi 802.11a (22.31 dBm) Wi-Fi 802.11n(HT20) (13.29 dBm) Wi-Fi 802.11n(HT40) (12.95 dBm) Wi-Fi 802.11ac(HT80) (12.84 dBm)
			Multiple transmit	Wi-Fi 802.11n(HT20) (19.30 dBm) Wi-Fi 802.11n(HT40) (19.03 dBm) Wi-Fi 802.11ac(HT80) (18.88 dBm)

MODULATION TYPE	WLAN 2.4 GHz Band	DSSS Modulation(DBPSK/DQPSK/CCK) OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
	WLAN 5 GHz Band	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
ANTENNA TYPE	WLAN 2.4 GHz Band	Ant 0 : 5.37 dBi Ant 1 : 5.23 dBi Ant 2 : 5.37 dBi Multiple Antenna : 10.10 dBi	
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz	Ant 0 : 5.42 dBi Ant 1 : 5.35 dBi Ant 2 : 5.65 dBi Ant 3 : 5.94 dBi Multiple Antenna : 11.62 dBi
		5 725 MHz ~ 5 850 MHz	Ant 0 : 6.88 dBi Ant 1 : 6.62 dBi Ant 2 : 6.85 dBi Ant 3 : 6.96 dBi Multiple Antenna : 12.85 dBi
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz
POWER REQUIREMENT		DC 12.0 V	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
QUANTUM T9	Basic Model (2.4 GHz: 3Tx3Rx, 5 GHz: 4Tx4Rx)	☒
QUANTUM T7	These models are identical to the basic model except for the Antenna. (2.4 GHz: 3Tx3Rx, 5 GHz: 3Tx3Rx)	☐
QUANTUM T5	These models are identical to the basic model except for the Antenna. (2.4 GHz: 2Tx2Rx, 5 GHz: 3Tx3Rx)	☐

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacture is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	HUMAX Co., Ltd.	QUANTUM T9 CPU B/D REV.:0.4	N/A
LED Board	HUMAX Co., Ltd.	QUANTUM T9 LED B/D REV.:0.5	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
QUANTUM T9	HUMAX Co., Ltd.	Wi-Fi Router (EUT)	TEST JIG
ADS-30FD-12 12030E	SHENZHEN HONOR ELECTRONIC CO., LTD.	AC/DC ADAPTER	EUT
Pavilion dv3	HP	Notebook PC	TEST JIG
Series PPP0009L-E	LITE-ON TECHNOLOGY CORPORATION	AC/DC ADAPTER	Notebook PC
JIG	N/A	TEST JIG	EUT / Notebook PC

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

UNII 1

Modulation	DATA RATE	OUTPUT POWER[dBm]			
		Ant 0	Ant 1	Ant 2	Ant 3
802.11 a (Middle Channel)	6 Mbps	18.20	18.17	18.22	18.25
	9 Mbps	18.00	18.01	18.03	17.97
	12 Mbps	17.79	17.81	17.88	17.85
	18 Mbps	17.63	17.64	17.68	17.72
	24 Mbps	17.37	17.37	17.55	17.52
	36 Mbps	17.14	17.19	17.44	17.26
	48 Mbps	16.87	16.90	17.21	16.97
	54 Mbps	16.59	16.78	17.05	16.78
HT 20 (Middle Channel)	6.5 Mbps	8.34	8.31	8.3	8.28
	13 Mbps	8.21	8.15	8.19	8.03
	19.5 Mbps	8.09	7.92	7.96	7.89
	26 Mbps	7.98	7.80	7.77	7.60
	39 Mbps	7.81	7.61	7.57	7.43
	52 Mbps	7.67	7.49	7.37	7.23
	58.5 Mbps	7.51	7.32	7.20	7.07
	65 Mbps	7.38	7.09	7.08	6.97
HT 40 (Low Channel)	13.5 Mbps	8.57	8.62	8.55	8.41
	27 Mbps	8.45	8.40	8.37	8.23
	40.5 Mbps	8.22	8.26	8.10	7.95
	54 Mbps	8.07	7.98	7.83	7.81
	81 Mbps	7.85	7.86	7.63	7.66
	108 Mbps	7.61	7.76	7.48	7.37
	121.5 Mbps	7.33	7.57	7.36	7.26
	135 Mbps	7.18	7.30	7.26	6.99

VHT80 (Middle Channel)	29.3 Mbps	11.44	11.38	11.40	11.50
	58.5 Mbps	11.15	11.17	11.15	11.38
	87.8 Mbps	10.92	11.03	11.04	11.21
	117 Mbps	10.71	10.81	10.82	11.07
	175.5 Mbps	10.42	10.62	10.68	10.83
	234 Mbps	10.16	10.43	10.46	10.61
	263.3 Mbps	9.92	10.31	10.23	10.34
	292.5 Mbps	9.76	10.17	10.08	10.21
	351 Mbps	9.57	9.62	9.55	9.41
	390 Mbps	9.39	9.44	9.31	9.29

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for HT20, 13.5 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for HT40, 29.3 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 3

Modulation	DATA RATE	OUTPUT POWER[dBm]			
		Ant 0	Ant 1	Ant 2	Ant 3
802.11 a (Middle Channel)	6 Mbps	22.12	22.05	22.17	22.10
	9 Mbps	22.00	21.91	21.89	21.99
	12 Mbps	21.82	21.66	21.69	21.84
	18 Mbps	21.53	21.51	21.49	21.63
	24 Mbps	21.37	21.30	21.26	21.43
	36 Mbps	21.17	21.20	21.12	21.15
	48 Mbps	20.90	21.09	20.87	21.05
	54 Mbps	20.73	20.87	20.74	20.86
HT 20 (Middle Channel)	6.5 Mbps	12.98	12.96	13.04	12.99
	13 Mbps	12.75	12.67	12.84	12.72
	19.5 Mbps	12.65	12.43	12.74	12.62
	26 Mbps	12.41	12.22	12.54	12.49
	39 Mbps	12.26	11.93	12.27	12.25
	52 Mbps	12.00	11.75	12.08	11.99
	58.5 Mbps	11.73	11.46	11.89	11.88
	65 Mbps	11.59	11.31	11.75	11.73
HT 40 (Low Channel)	13.5 Mbps	13.01	13.05	13.02	12.95
	27 Mbps	12.89	12.83	12.87	12.74
	40.5 Mbps	12.64	12.72	12.68	12.52
	54 Mbps	12.41	12.62	12.50	12.24
	81 Mbps	12.12	12.48	12.36	12.01
	108 Mbps	11.84	12.32	12.06	11.79
	121.5 Mbps	11.63	12.21	11.90	11.60
	135 Mbps	11.52	11.92	11.61	11.36

VHT80 (Middle Channel)	29.3 Mbps	12.86	12.92	12.81	12.84
	58.5 Mbps	12.75	12.68	12.56	12.70
	87.8 Mbps	12.57	12.43	12.27	12.56
	117 Mbps	12.41	12.29	12.10	12.40
	175.5 Mbps	12.28	12.13	11.90	12.10
	234 Mbps	12.15	11.92	11.75	11.93
	263.3 Mbps	12.01	11.62	11.63	11.67
	292.5 Mbps	11.85	11.42	11.36	11.39
	351 Mbps	9.57	9.62	9.55	9.41
	390 Mbps	9.32	9.46	9.29	9.16

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for HT20, 13.5 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for HT40, 29.3 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is PCB Pattern Antenna, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 26 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C

Relative humidity : 41 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 26 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26 dB.



7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data for 802.11a RLAN Mode

7.4.1 Test data for Antenna 0

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	23.18
	Middle	5 220.00	22.78
	High	5 240.00	23.43
5 725 ~ 5 850	Low	5 745.00	28.27
	Middle	5 785.00	29.92
	High	5 825.00	28.42


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

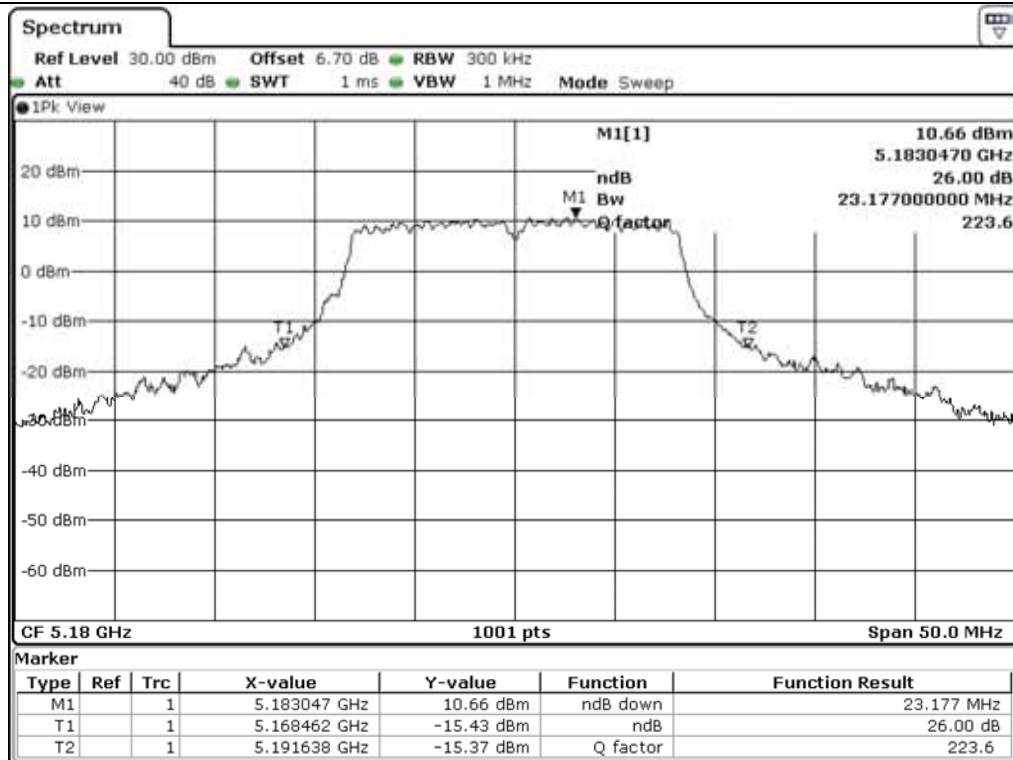


Low Channel (5 180 MHz)

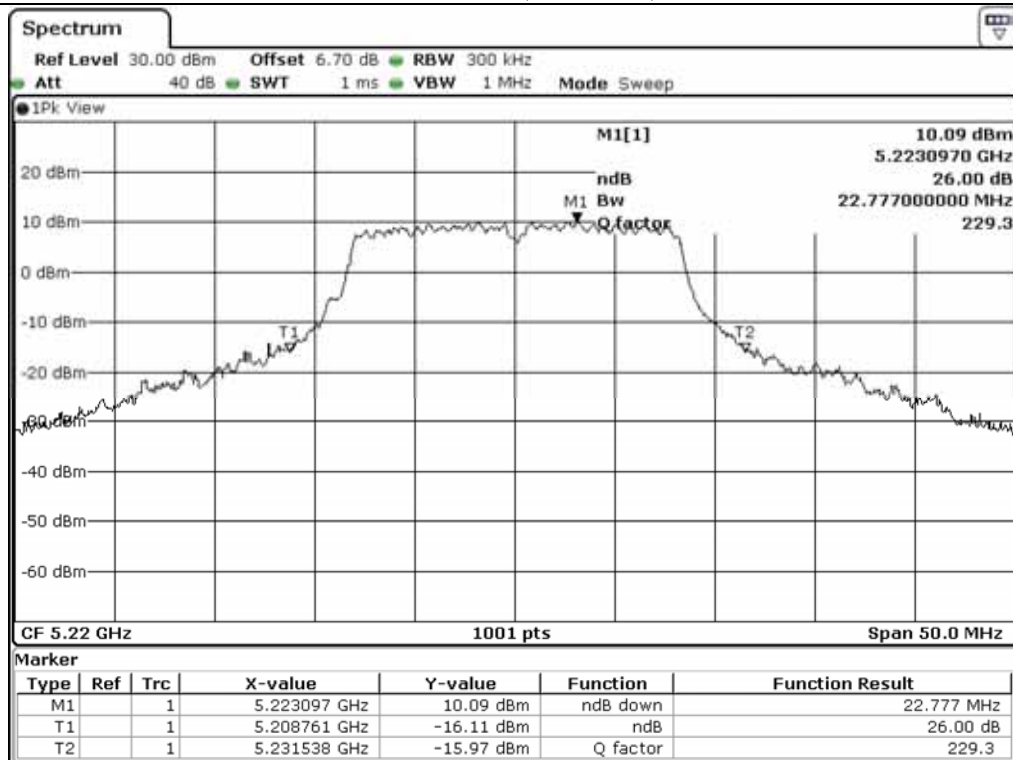


Middle Channel (5 220 MHz)

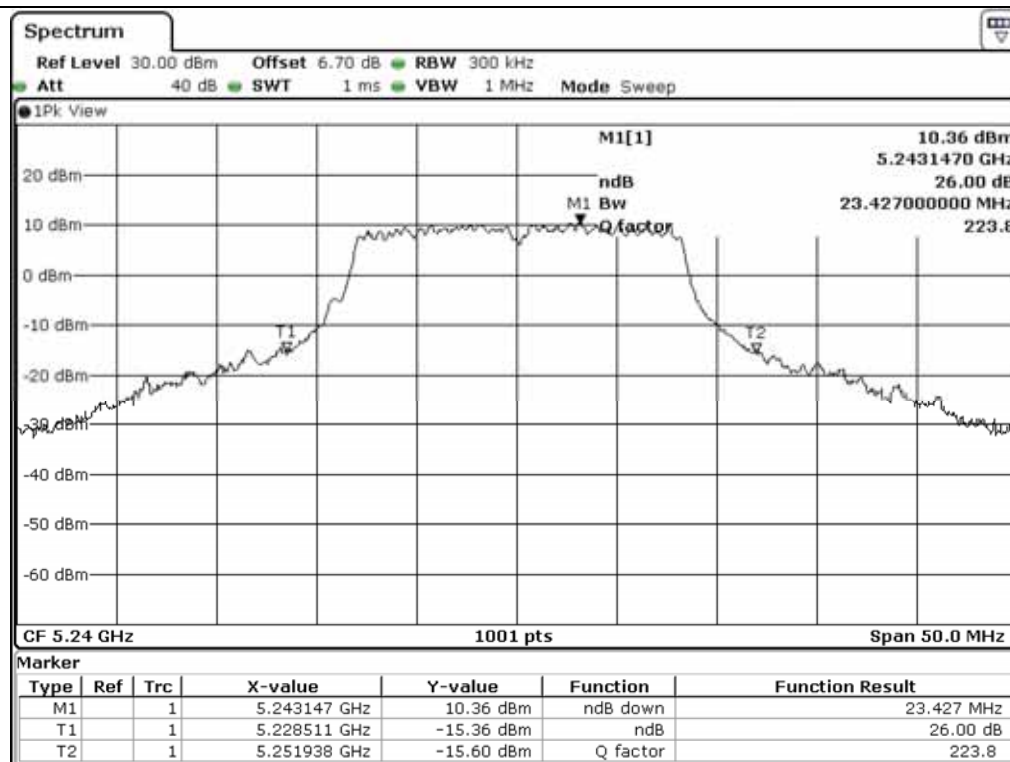


High Channel (5 240 MHz)

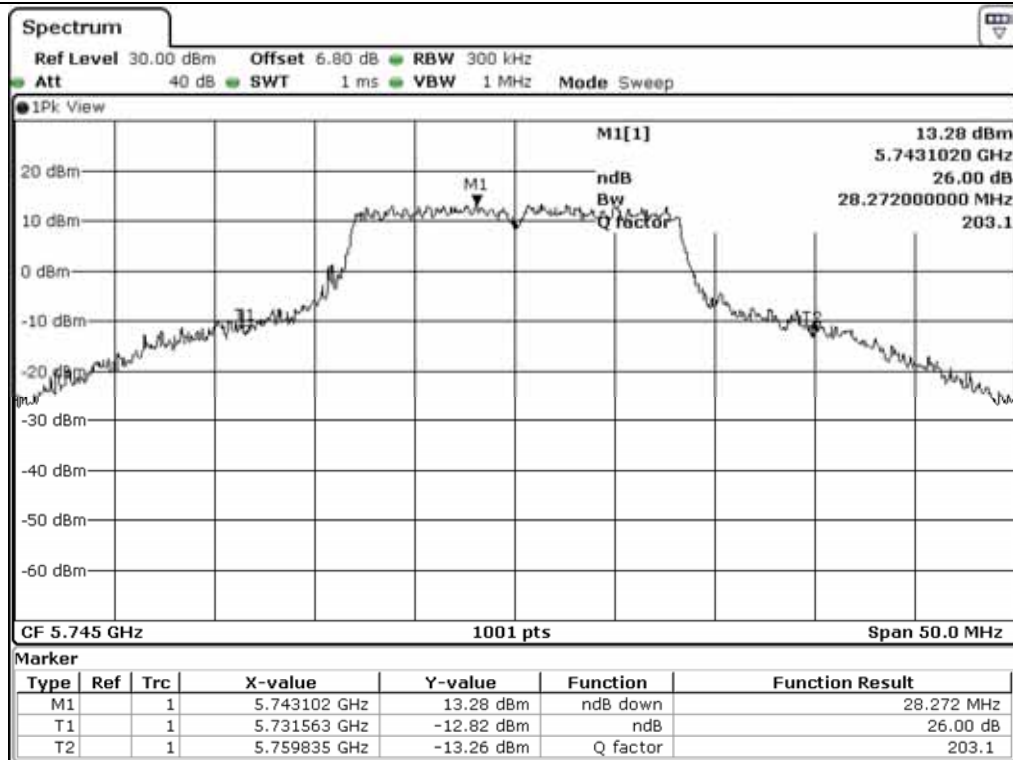

Low Channel (5 745 MHz)

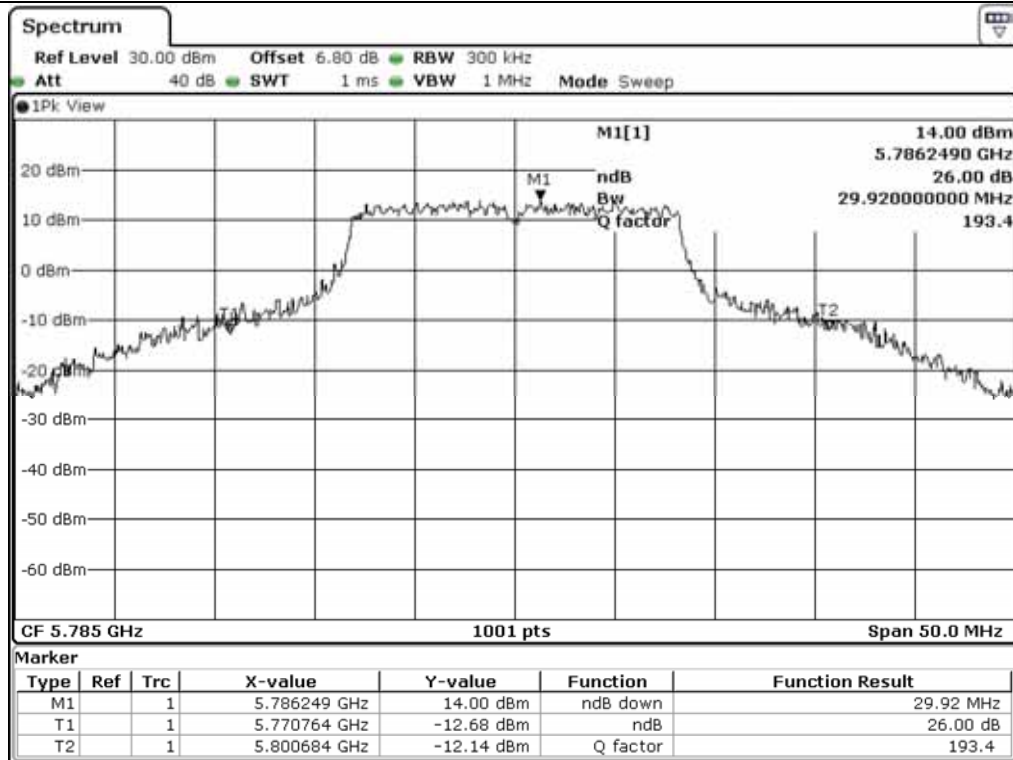

Middle Channel (5 785 MHz)

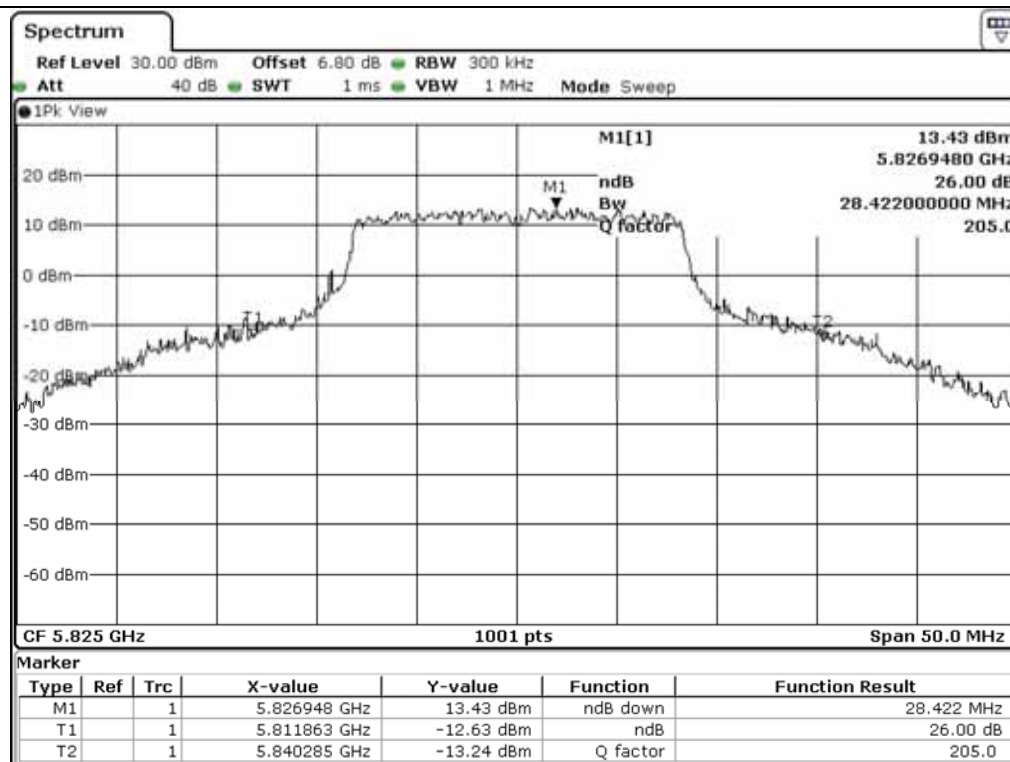

High Channel (5 825 MHz)

7.4.2 Test data for Antenna 1

- Test Date : September 20, 2017 ~ September 27, 2017


- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	22.28
	Middle	5 220.00	22.68
	High	5 240.00	22.63
5 725 ~ 5 850	Low	5 745.00	28.32
	Middle	5 785.00	28.12
	High	5 825.00	28.72


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

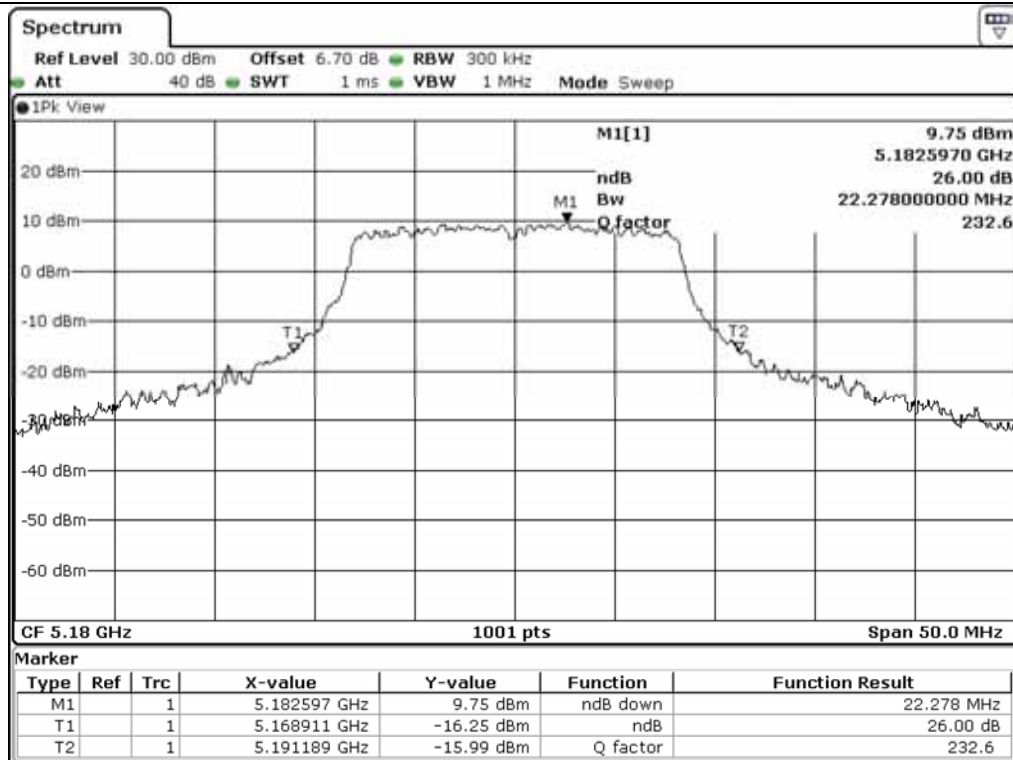


Low Channel (5 180 MHz)

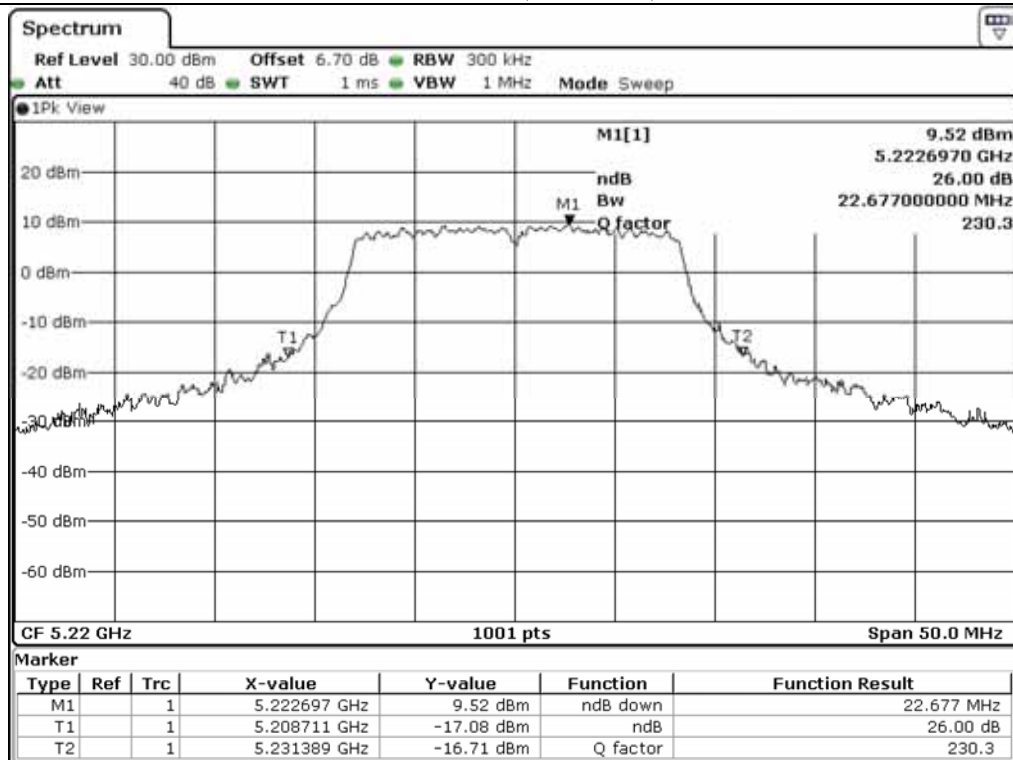


Middle Channel (5 220 MHz)

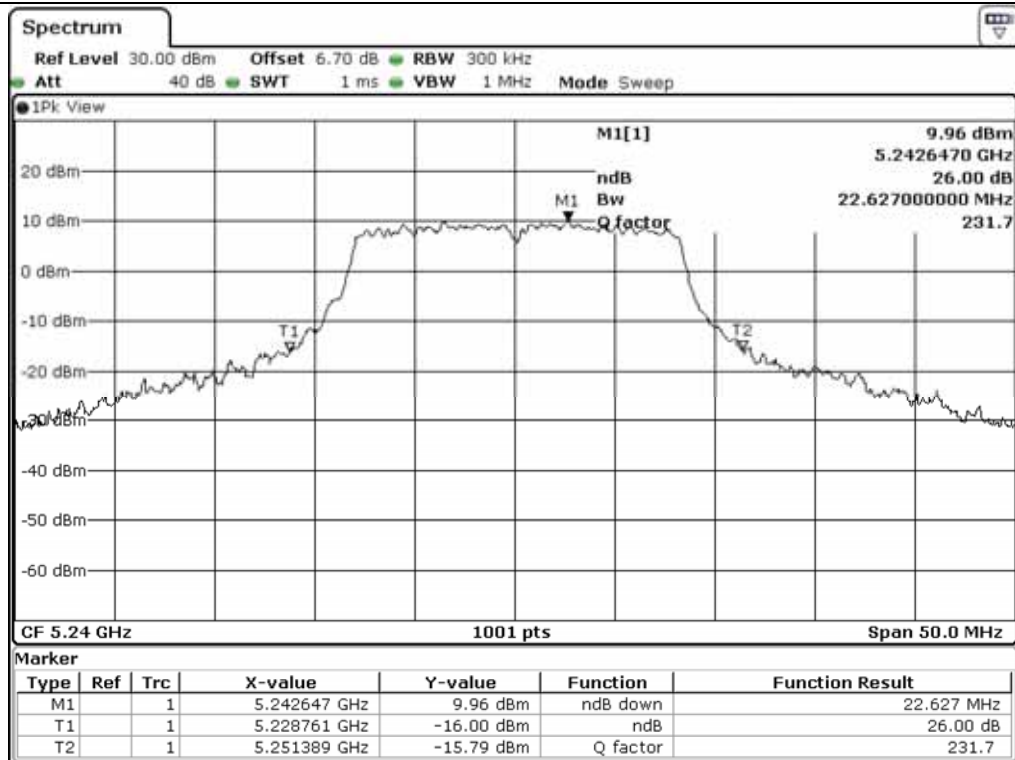


High Channel (5 240 MHz)

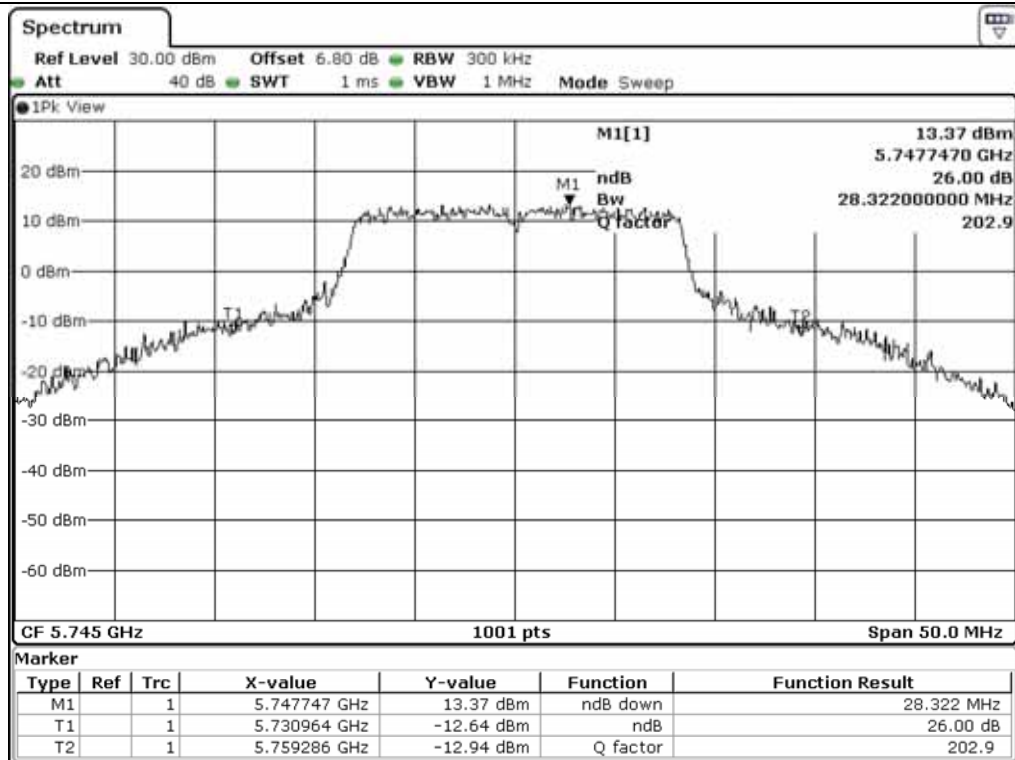

Low Channel (5 745 MHz)

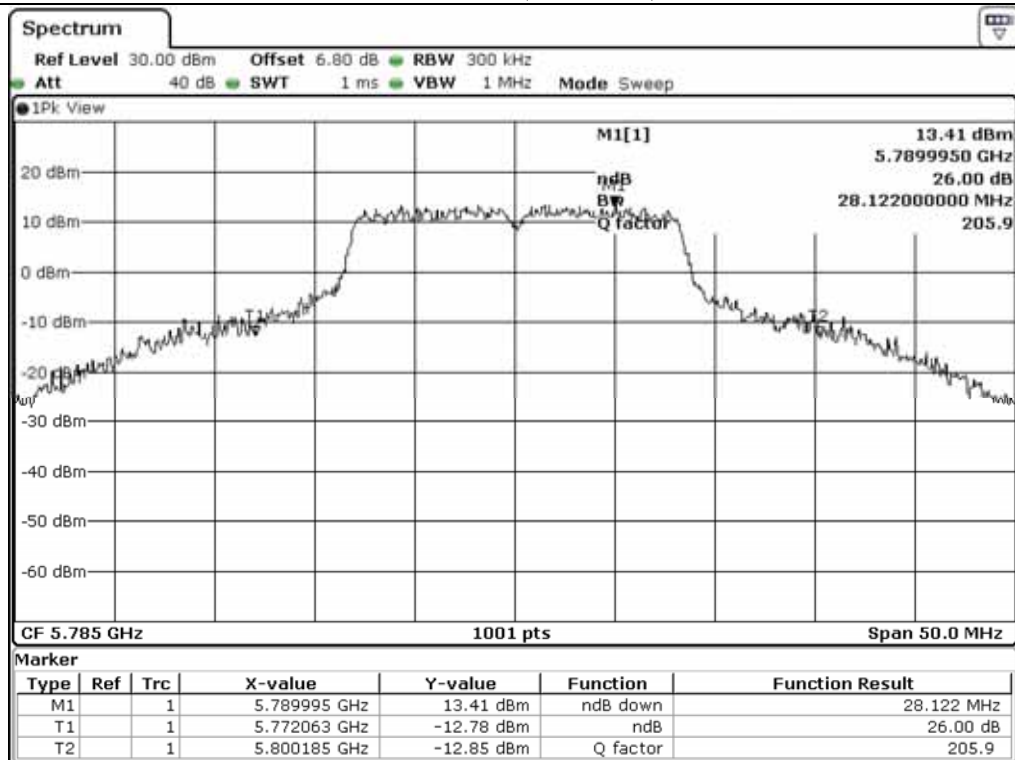

Middle Channel (5 785 MHz)

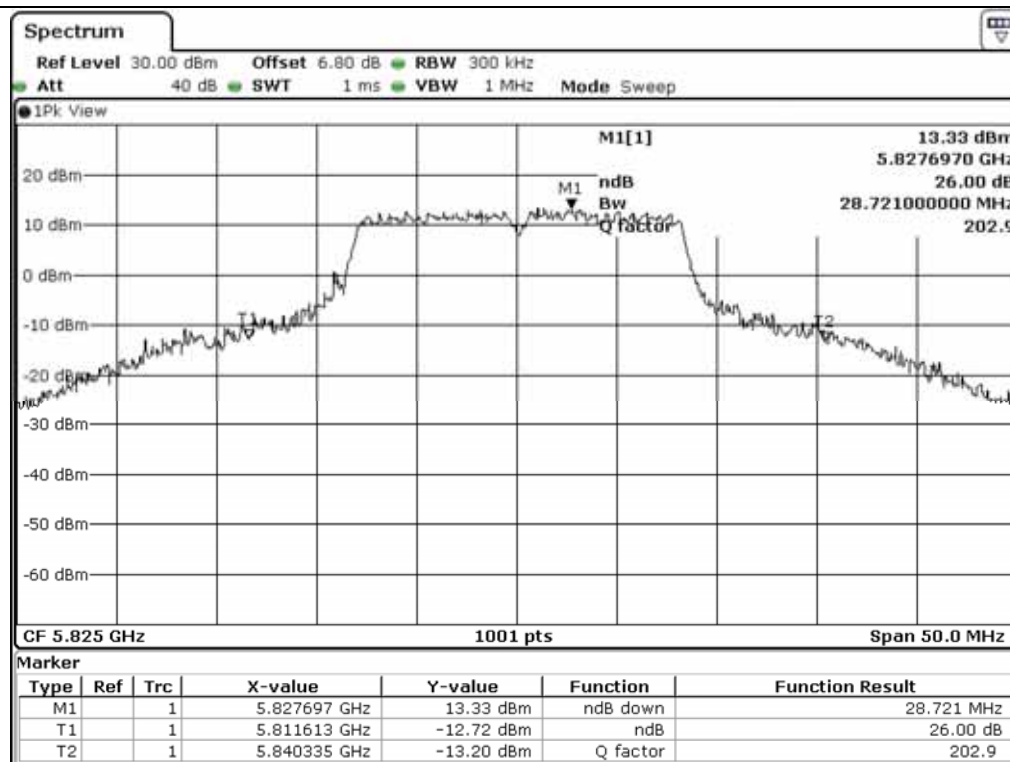

High Channel (5 825 MHz)

7.4.3 Test data for Antenna 2

- Test Date : September 20, 2017 ~ September 27, 2017


- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	22.38
	Middle	5 220.00	22.43
	High	5 240.00	22.53
5 725 ~ 5 850	Low	5 745.00	27.87
	Middle	5 785.00	28.87
	High	5 825.00	27.37


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

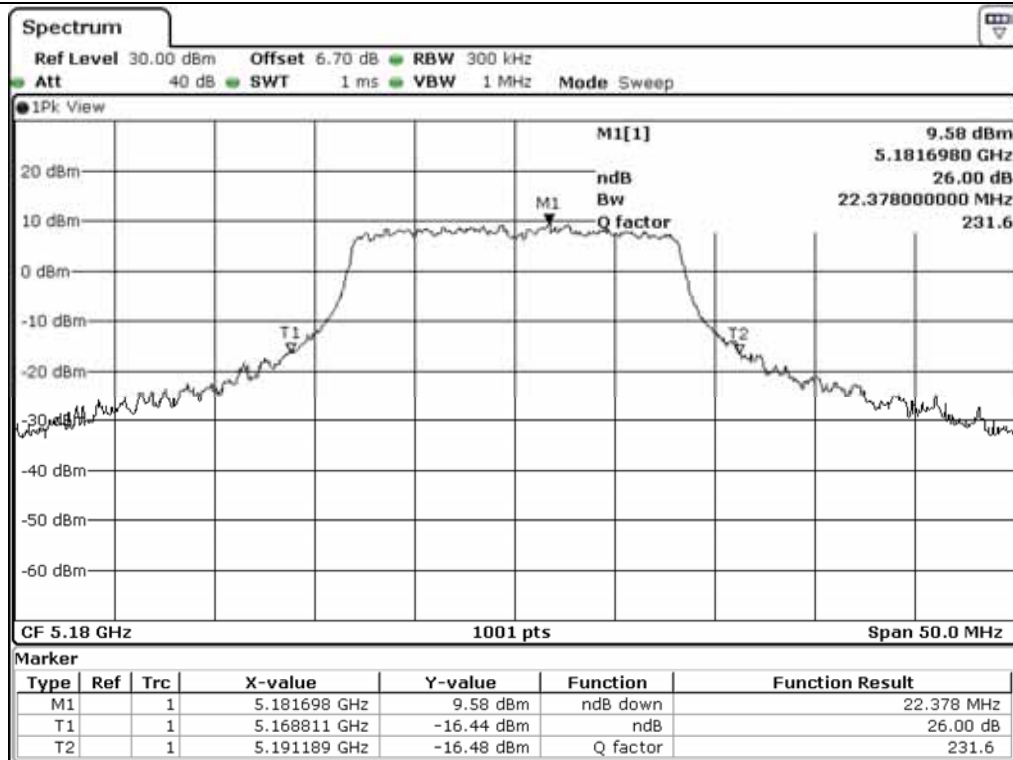


Low Channel (5 180 MHz)

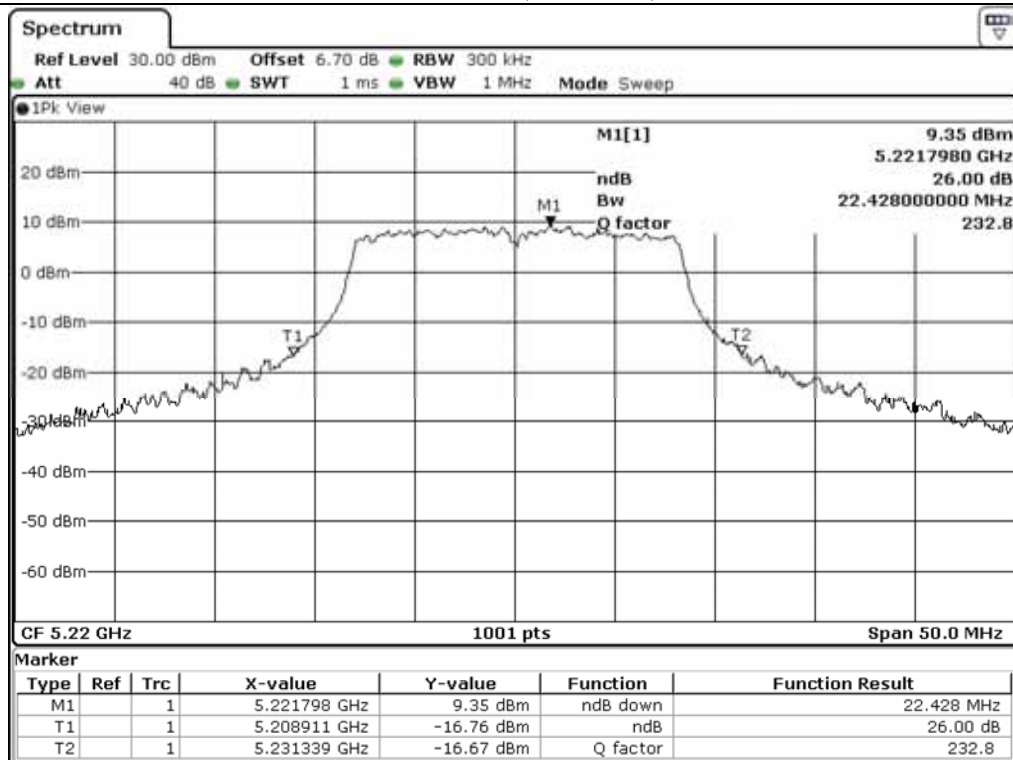


Middle Channel (5 220 MHz)

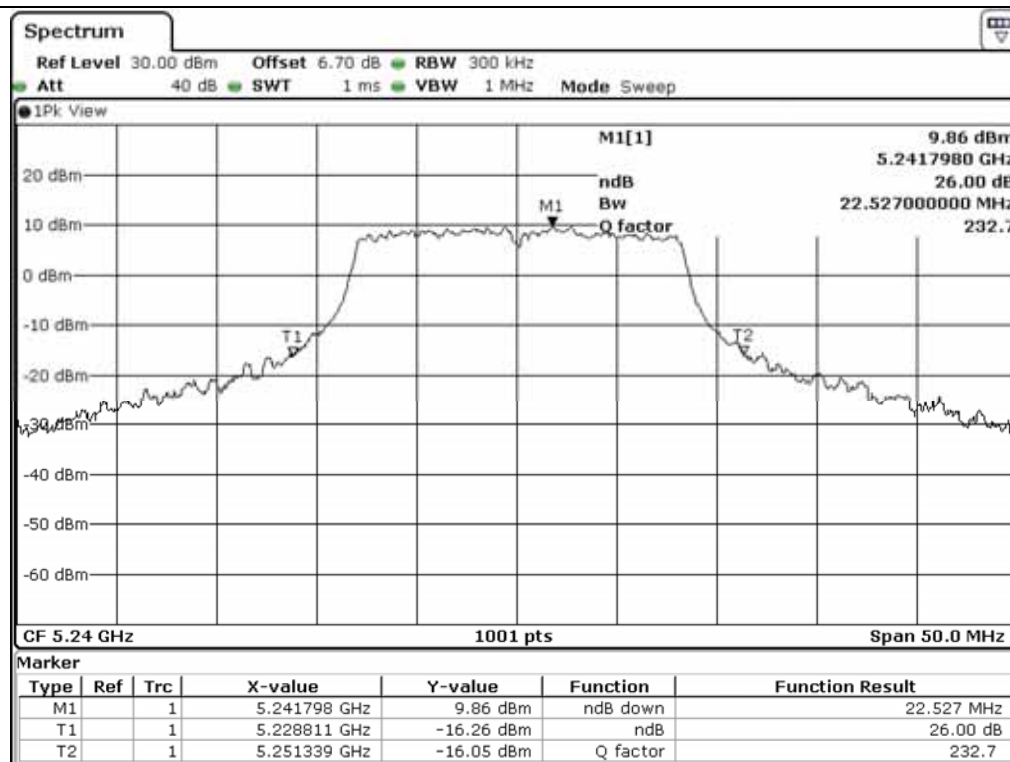


High Channel (5 240 MHz)

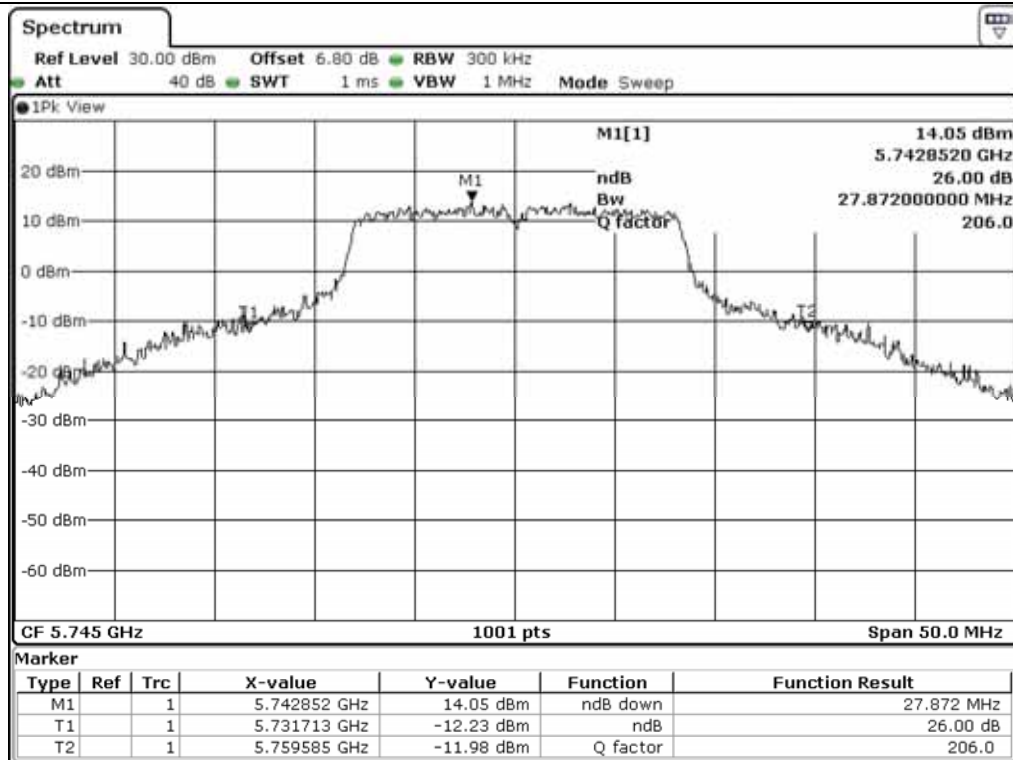

Low Channel (5 745 MHz)

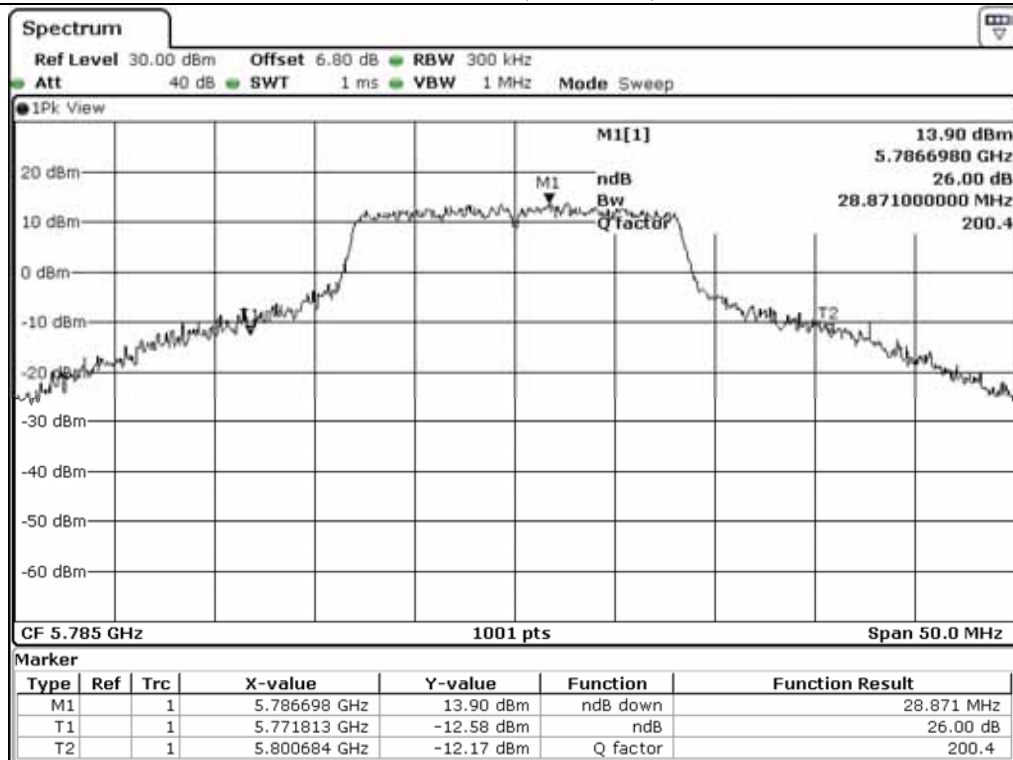

Middle Channel (5 785 MHz)

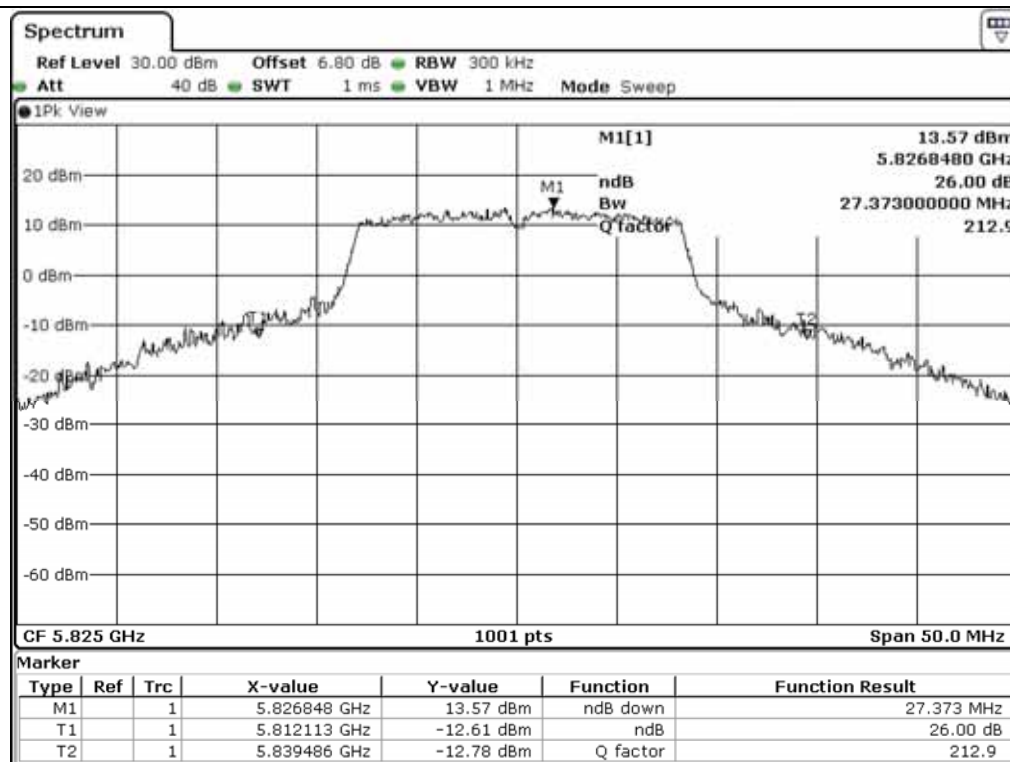

High Channel (5 825 MHz)

7.4.4 Test data for Antenna 3

- Test Date : September 20, 2017 ~ September 27, 2017


- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	23.08
	Middle	5 220.00	23.18
	High	5 240.00	23.03
5 725 ~ 5 850	Low	5 745.00	27.32
	Middle	5 785.00	28.27
	High	5 825.00	27.62


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

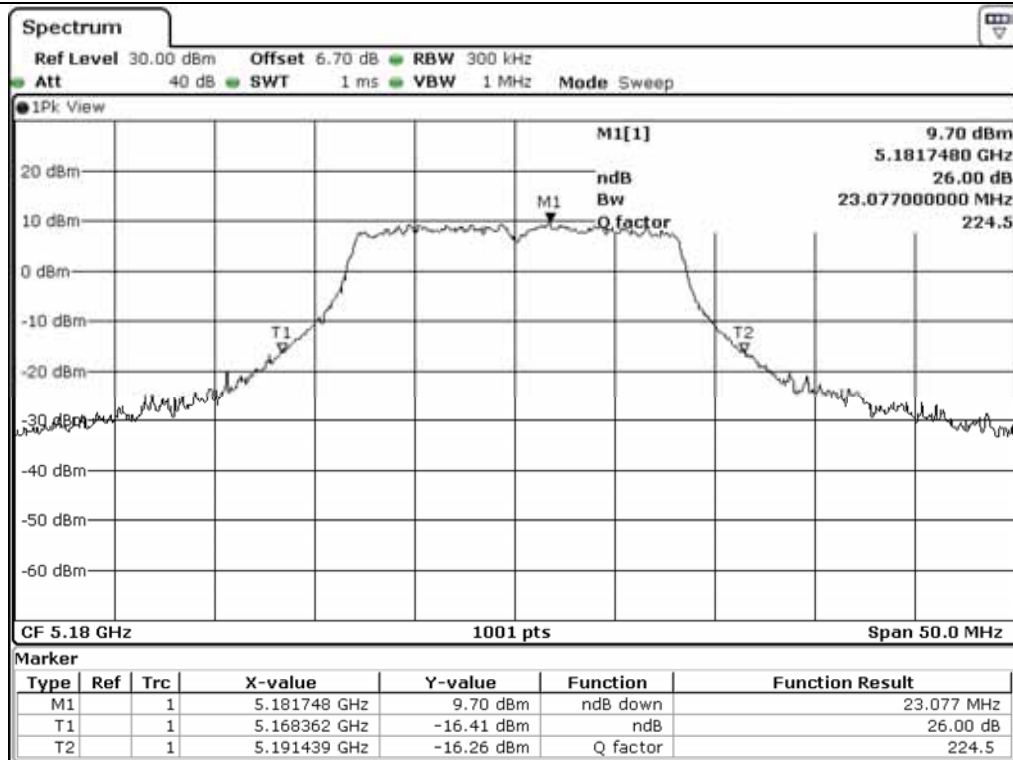


Low Channel (5 180 MHz)

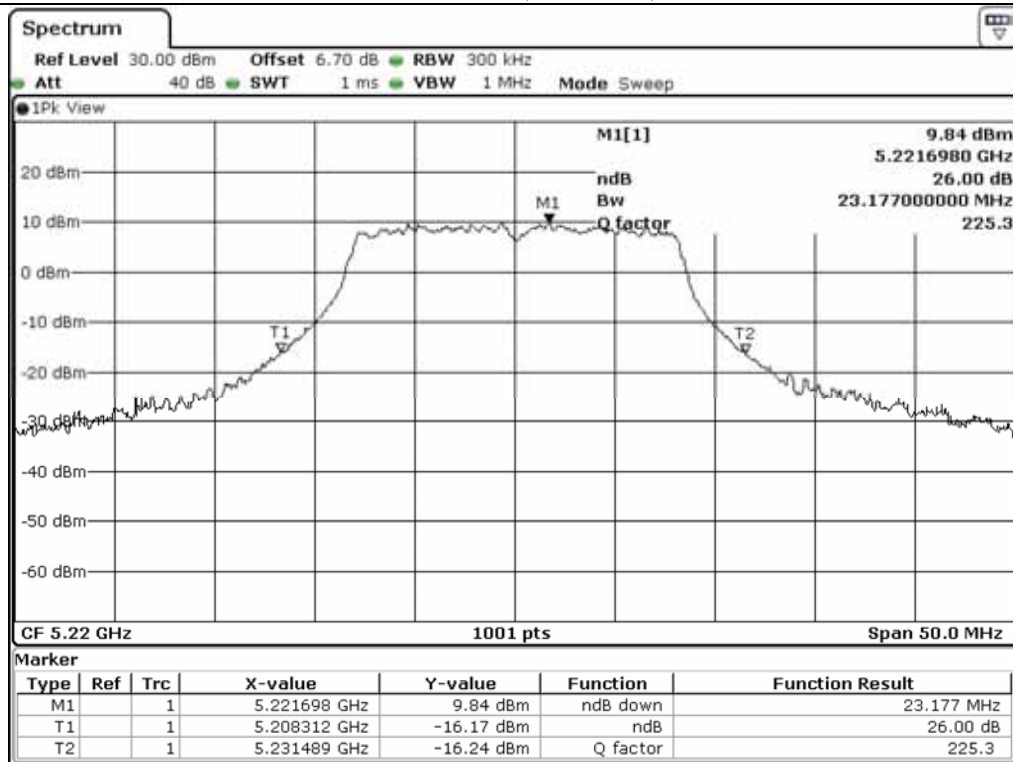


Middle Channel (5 220 MHz)

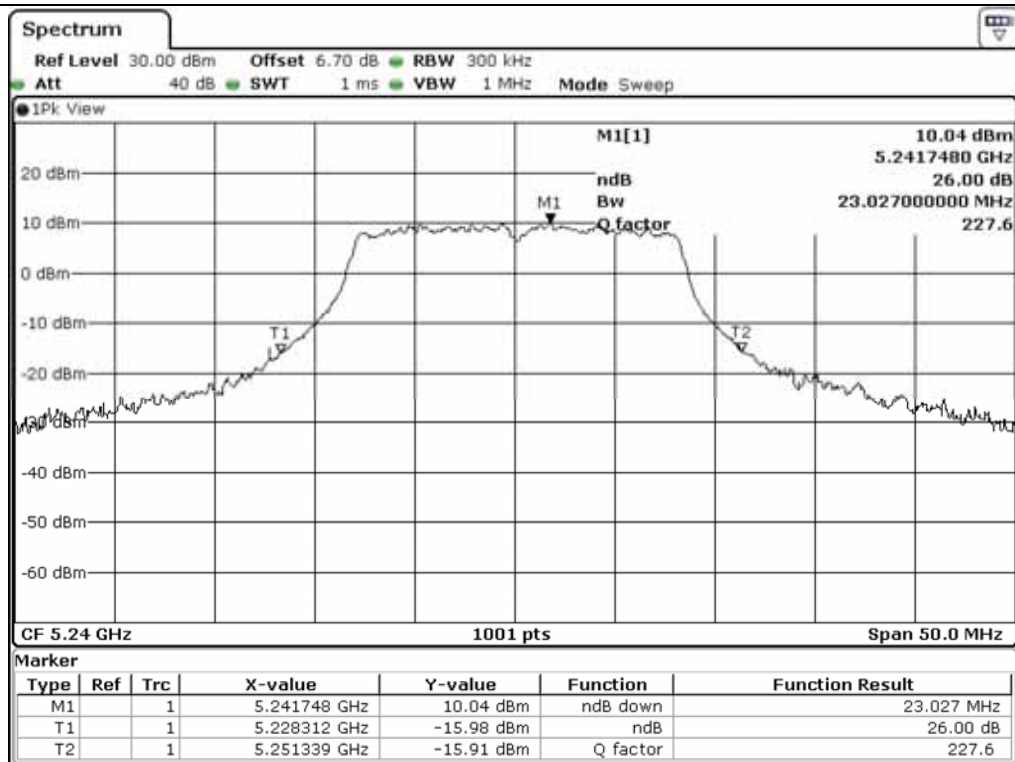


High Channel (5 240 MHz)

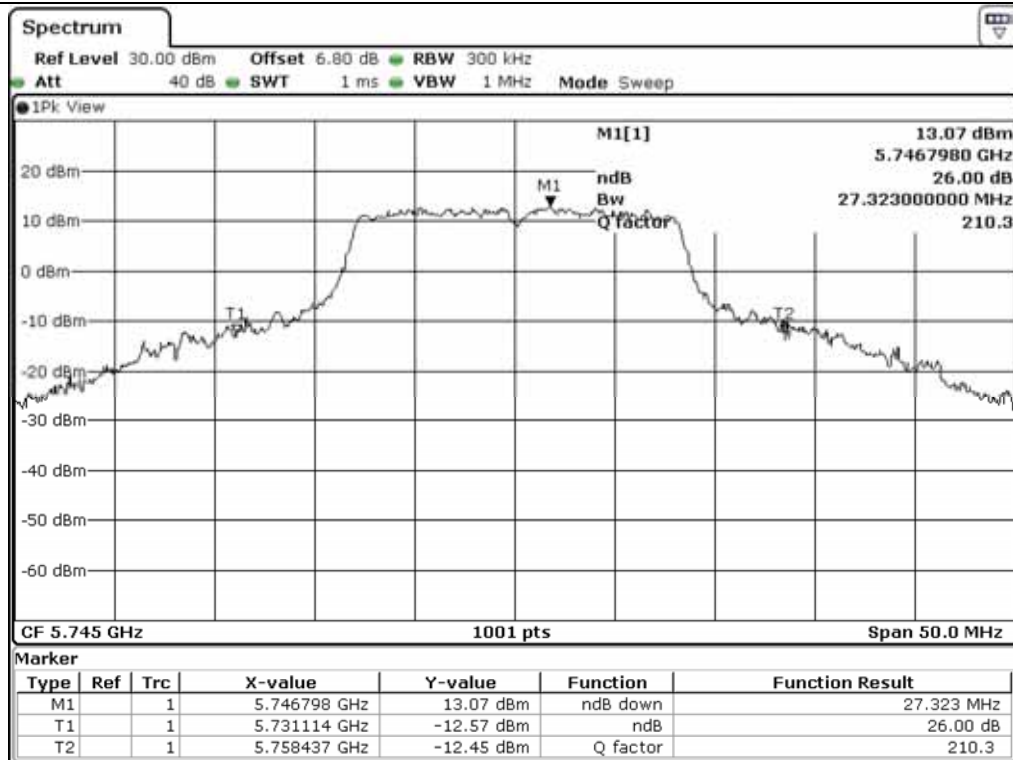

Low Channel (5 745 MHz)

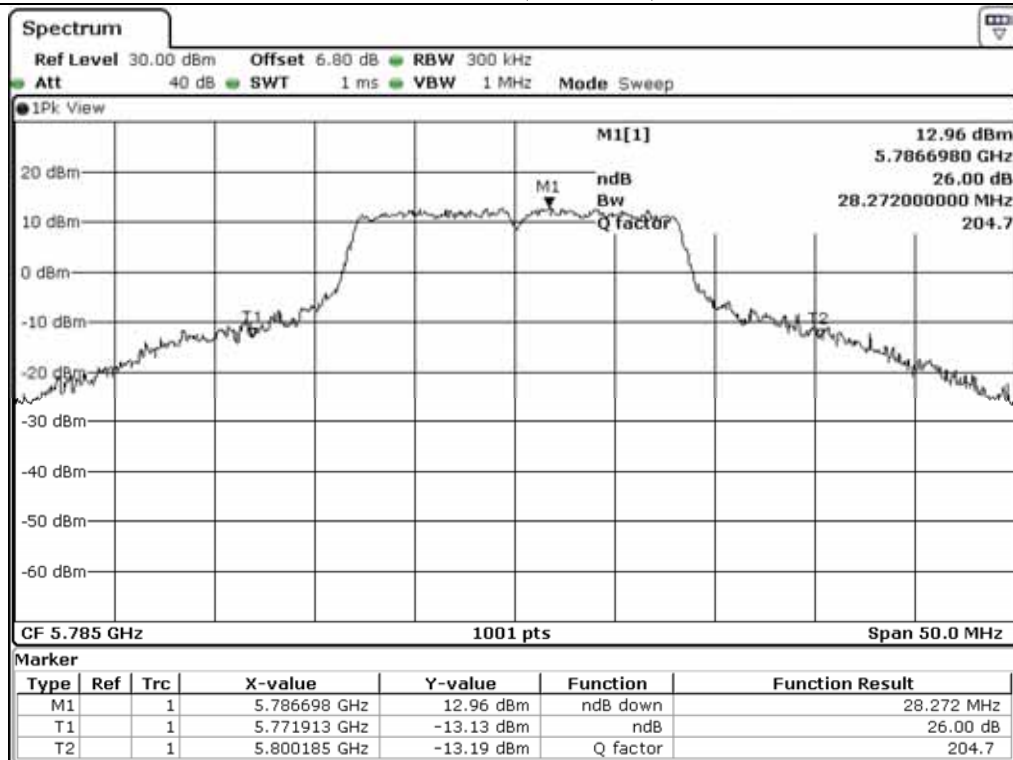

Middle Channel (5 785 MHz)

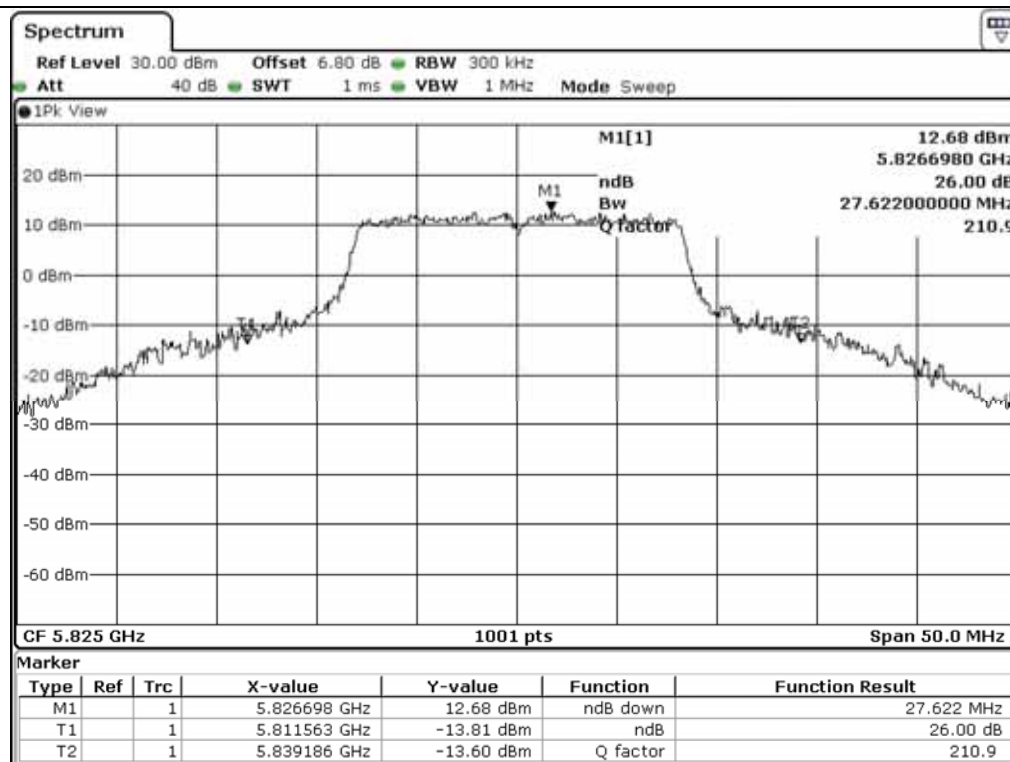

High Channel (5 825 MHz)

7.5 Test data for 802.11n_HT20 RLAN Mode

7.5.1 Test data for Antenna 0

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	23.38
	Middle	5 220.00	23.63
	High	5 240.00	23.68
5 725 ~ 5 850	Low	5 745.00	23.98
	Middle	5 785.00	23.98
	High	5 825.00	22.93


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

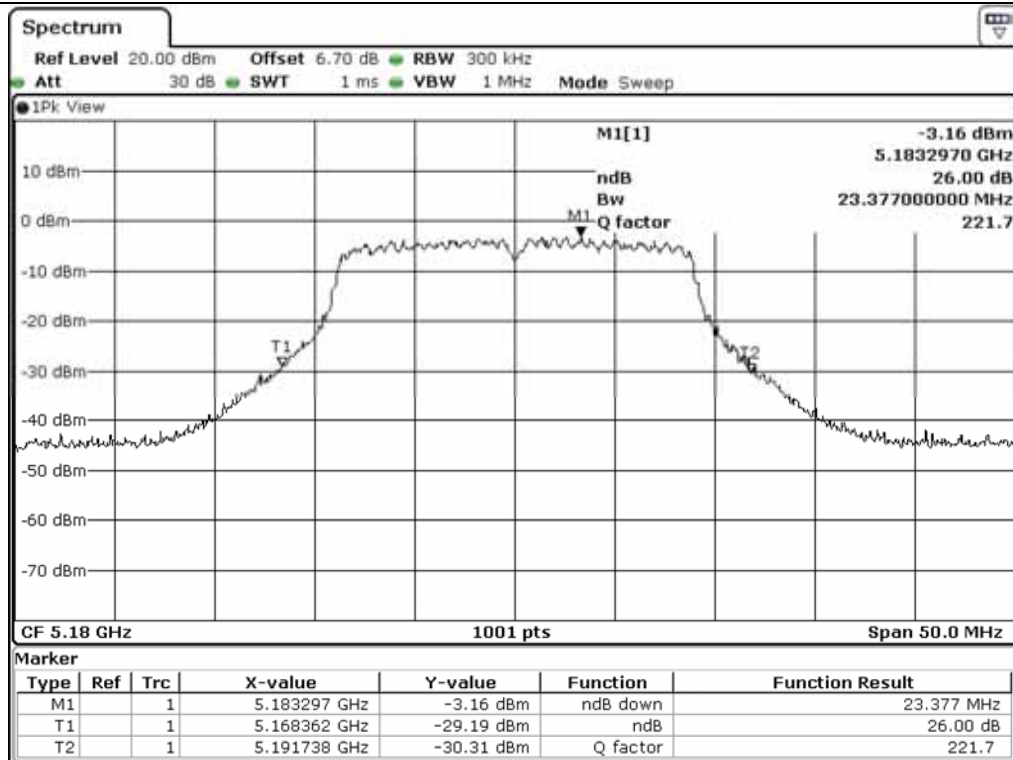


Low Channel (5 180 MHz)

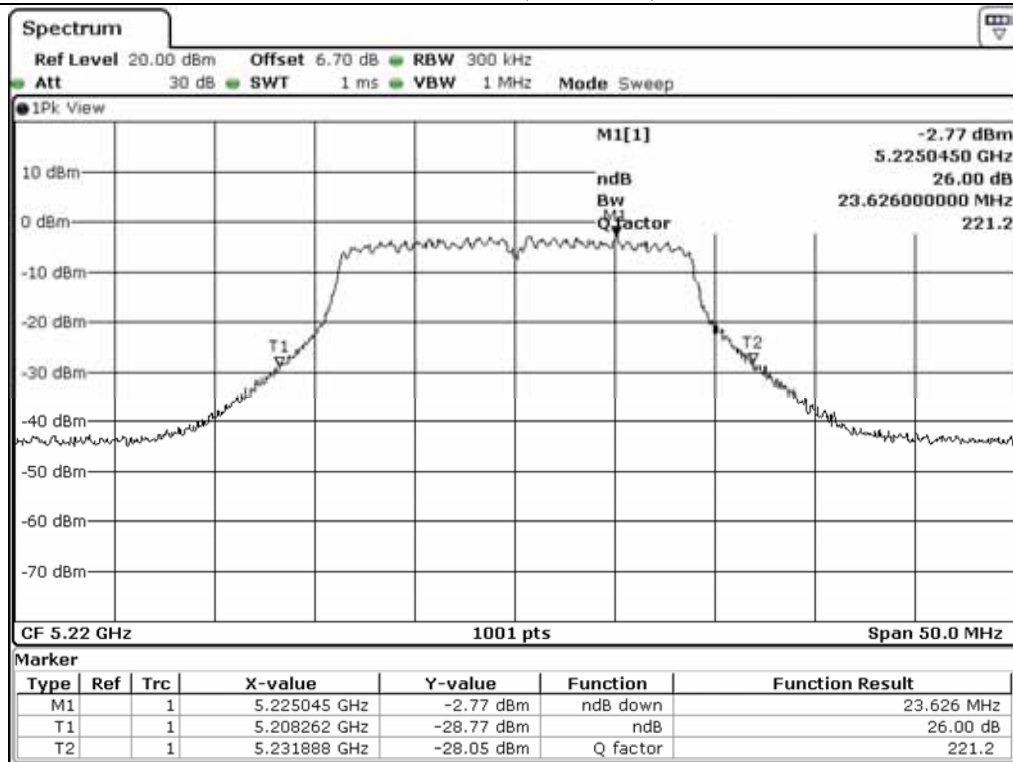


Middle Channel (5 220 MHz)

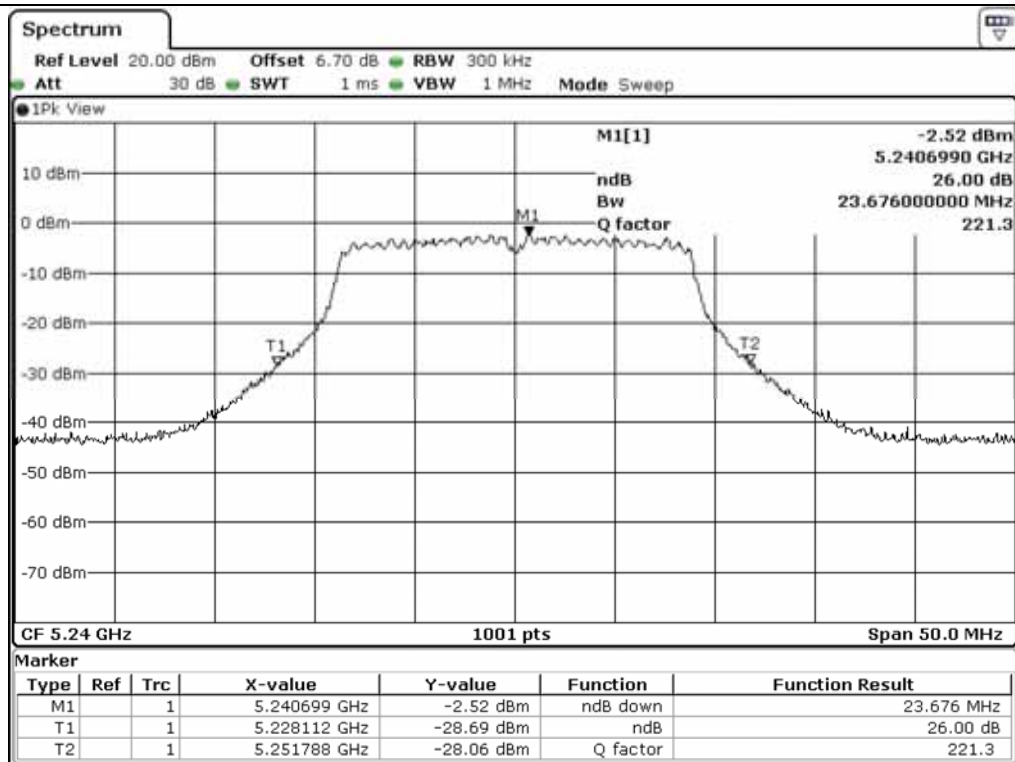


High Channel (5 240 MHz)

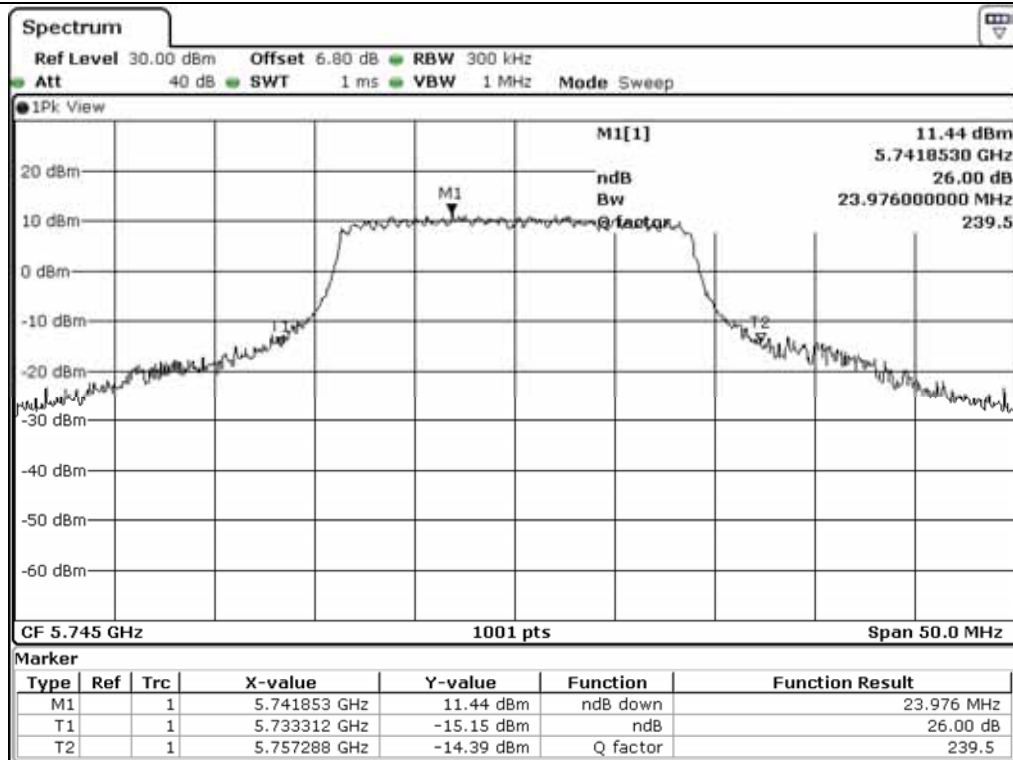

Low Channel (5 745 MHz)

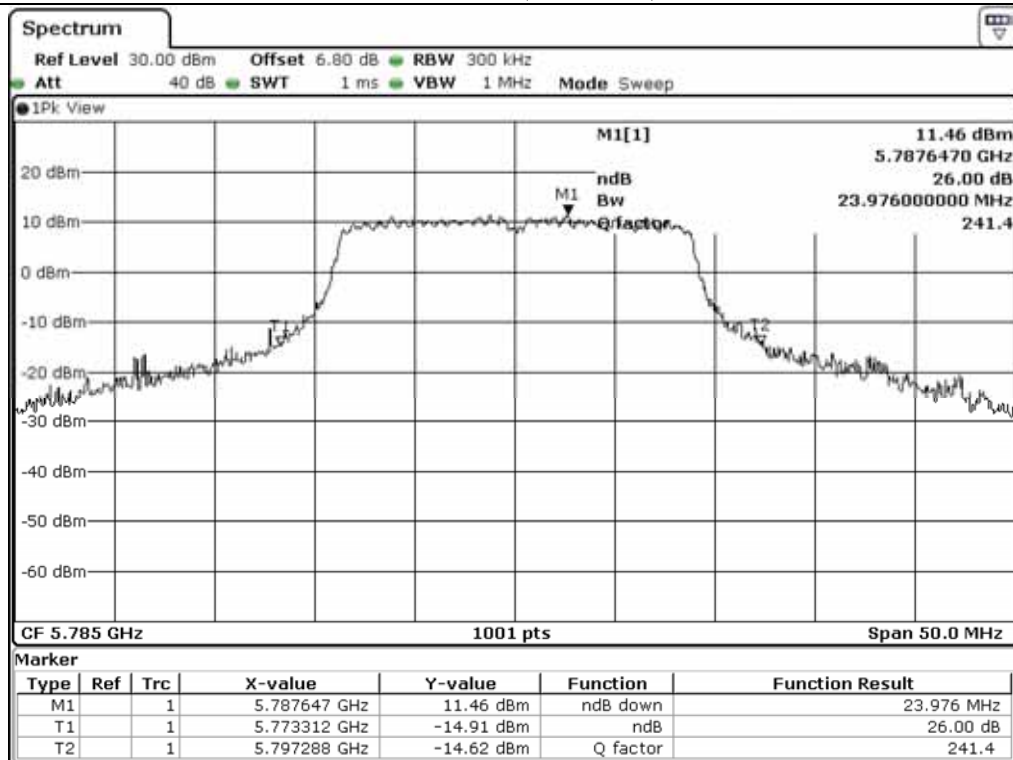

Middle Channel (5 785 MHz)

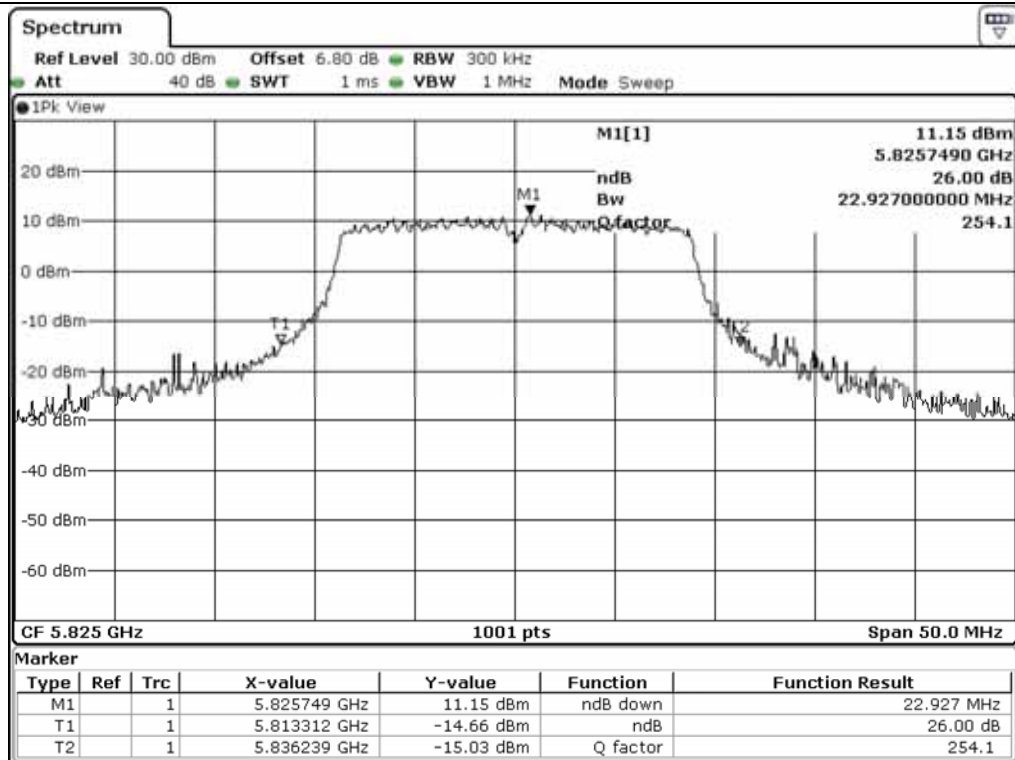

High Channel (5 825 MHz)

7.5.2 Test data for Antenna 1

- Test Date : September 20, 2017 ~ September 27, 2017


- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	23.48
	Middle	5 220.00	23.38
	High	5 240.00	23.03
5 725 ~ 5 850	Low	5 745.00	23.38
	Middle	5 785.00	23.53
	High	5 825.00	23.58


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

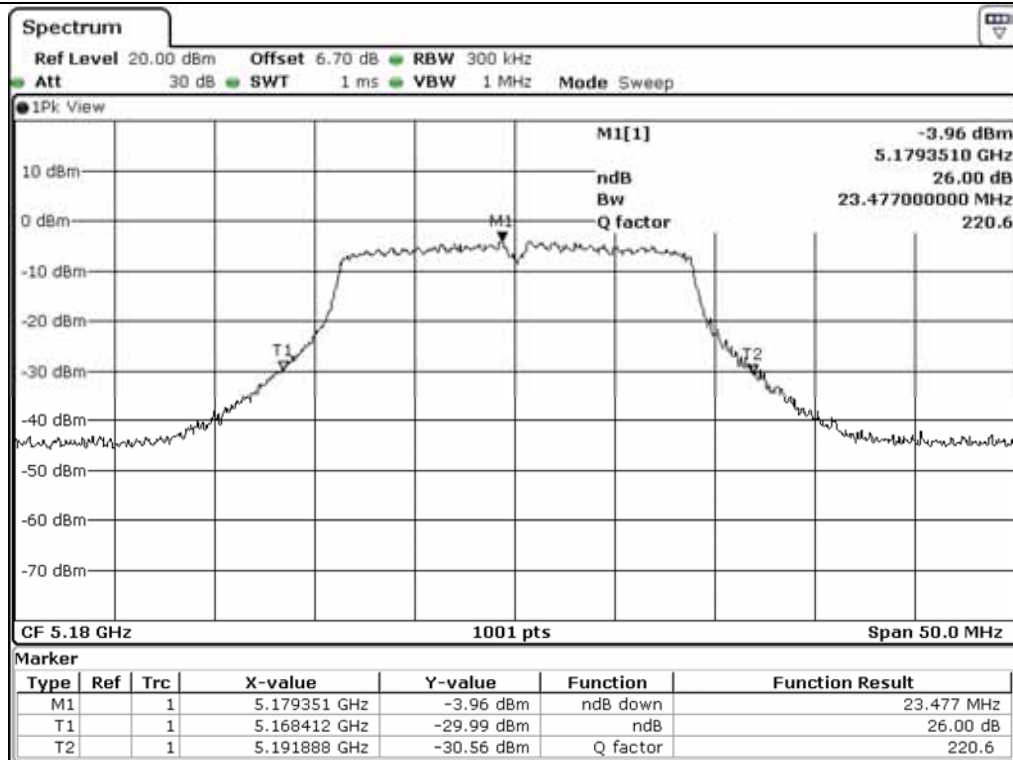


Low Channel (5 180 MHz)

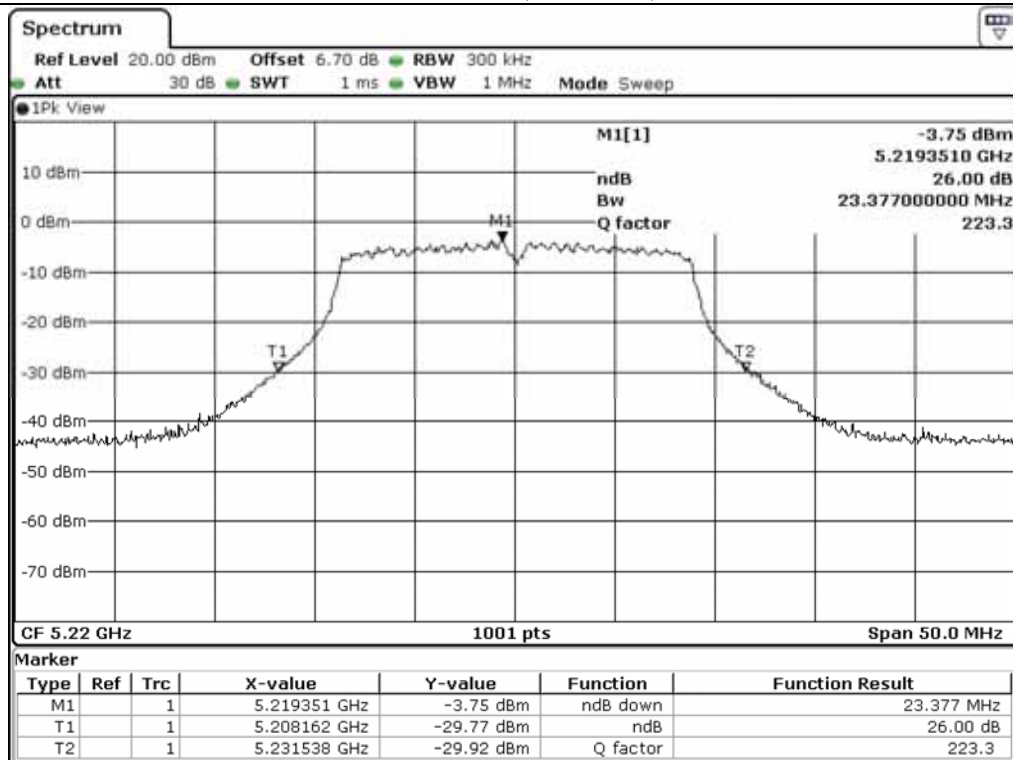


Middle Channel (5 220 MHz)

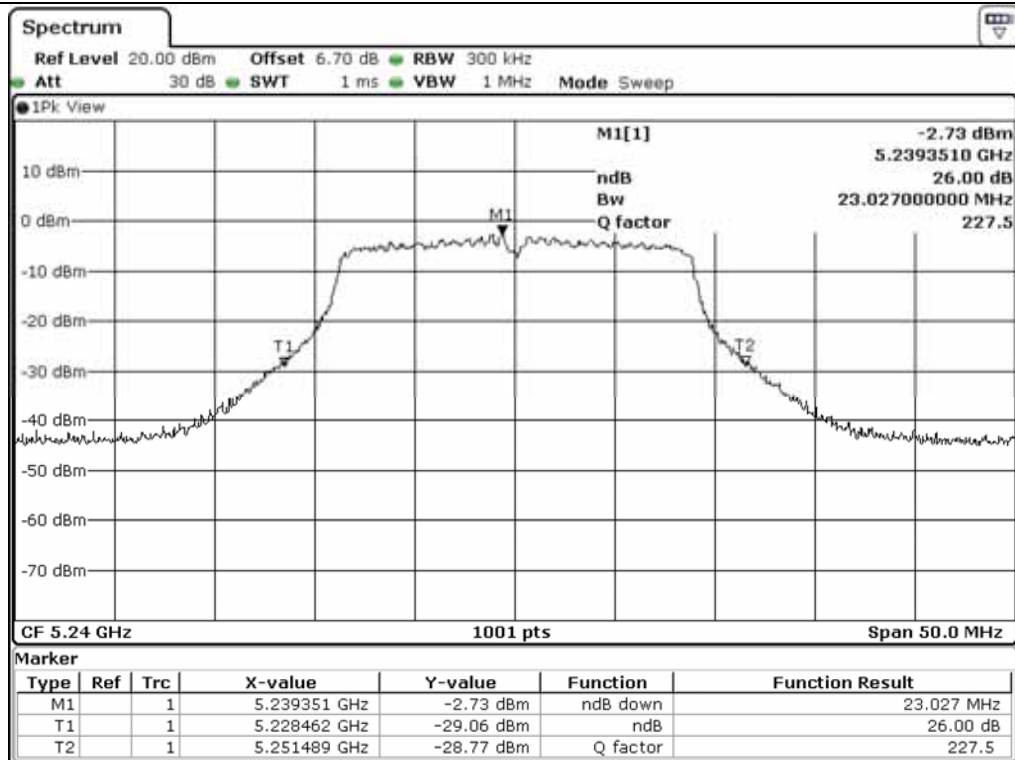


High Channel (5 240 MHz)

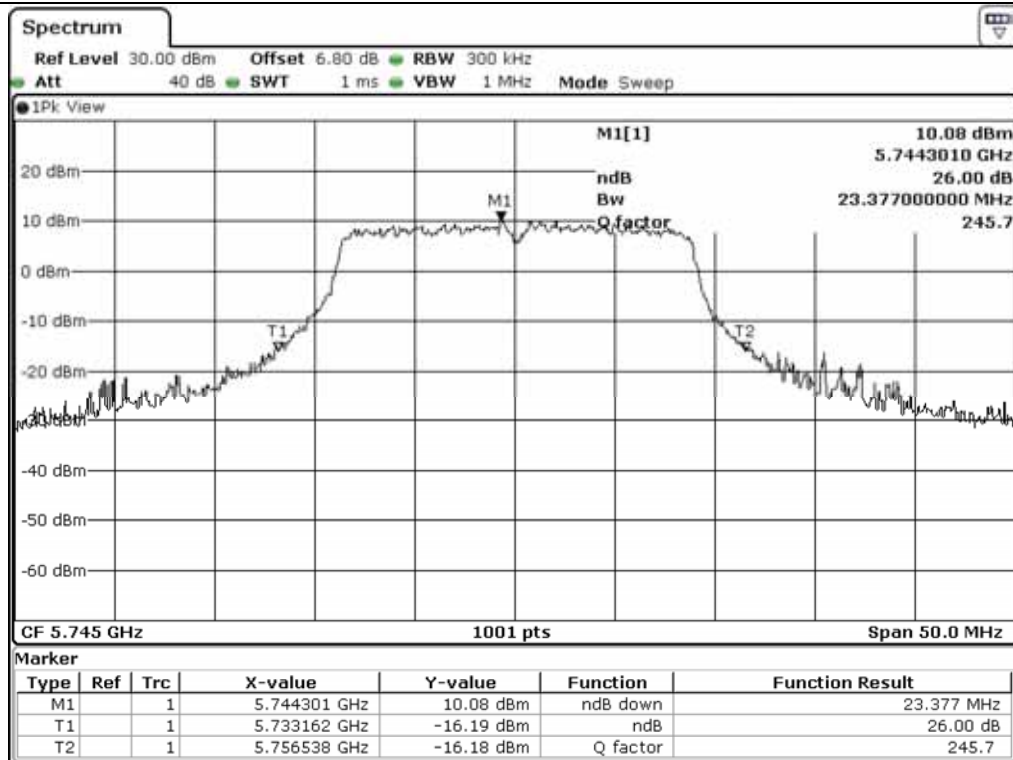

Low Channel (5 745 MHz)

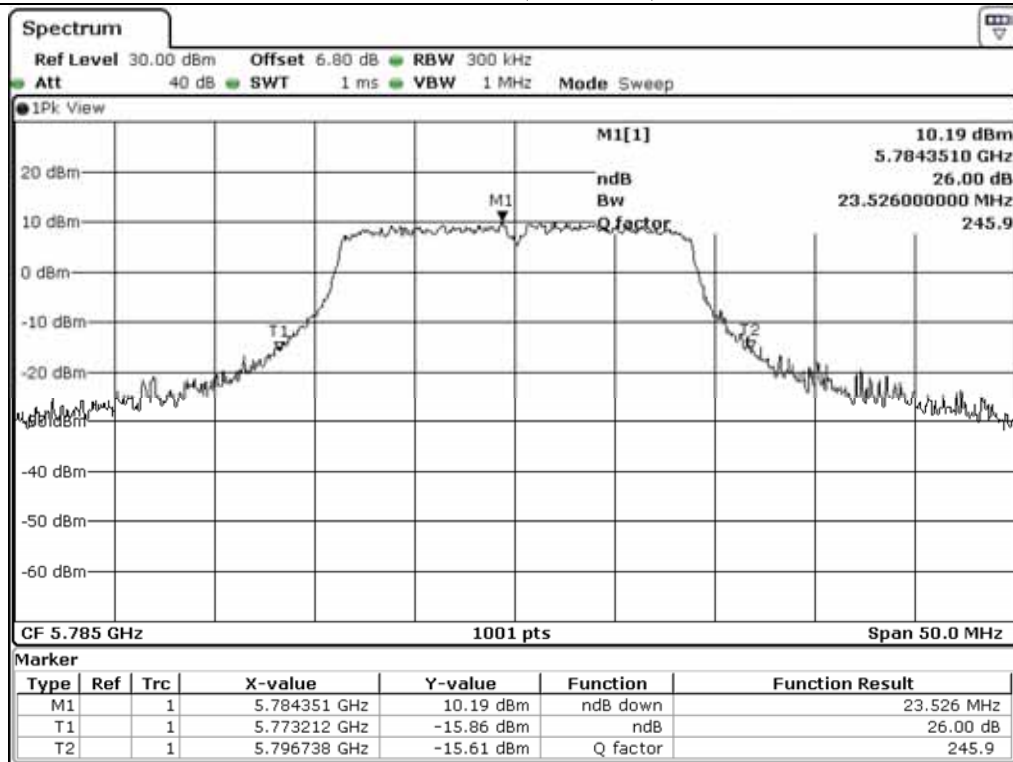

Middle Channel (5 785 MHz)

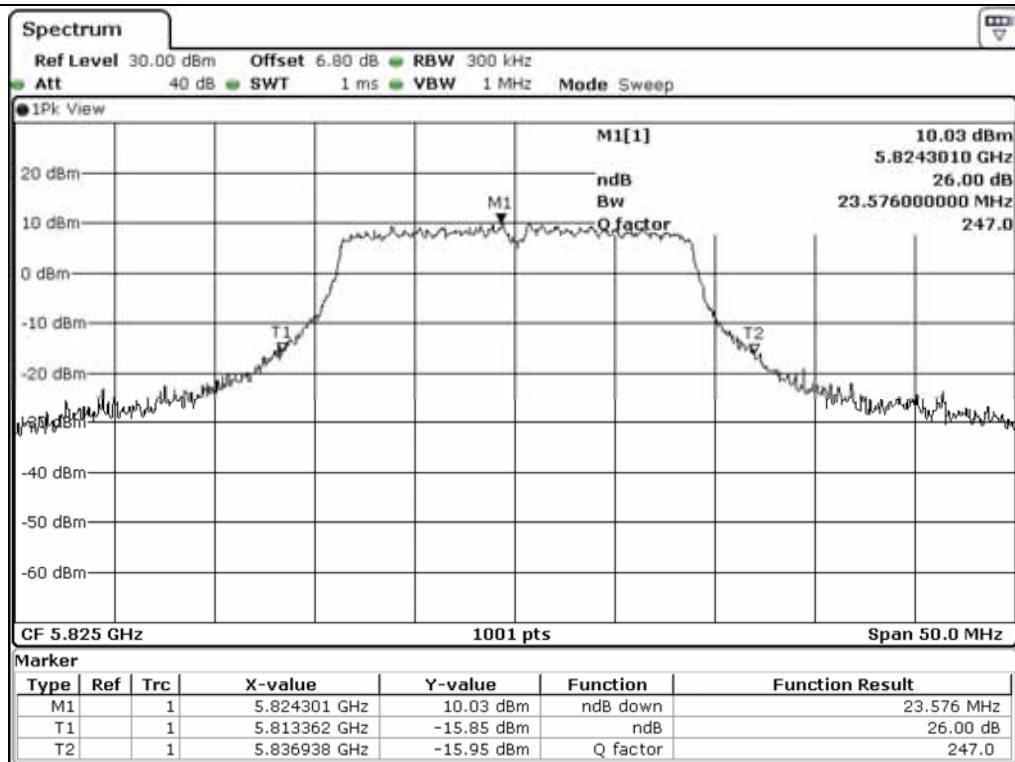

High Channel (5 825 MHz)

7.5.3 Test data for Antenna 2

- Test Date : September 20, 2017 ~ September 27, 2017


- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	23.98
	Middle	5 220.00	24.28
	High	5 240.00	24.48
5 725 ~ 5 850	Low	5 745.00	24.33
	Middle	5 785.00	24.18
	High	5 825.00	23.28


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

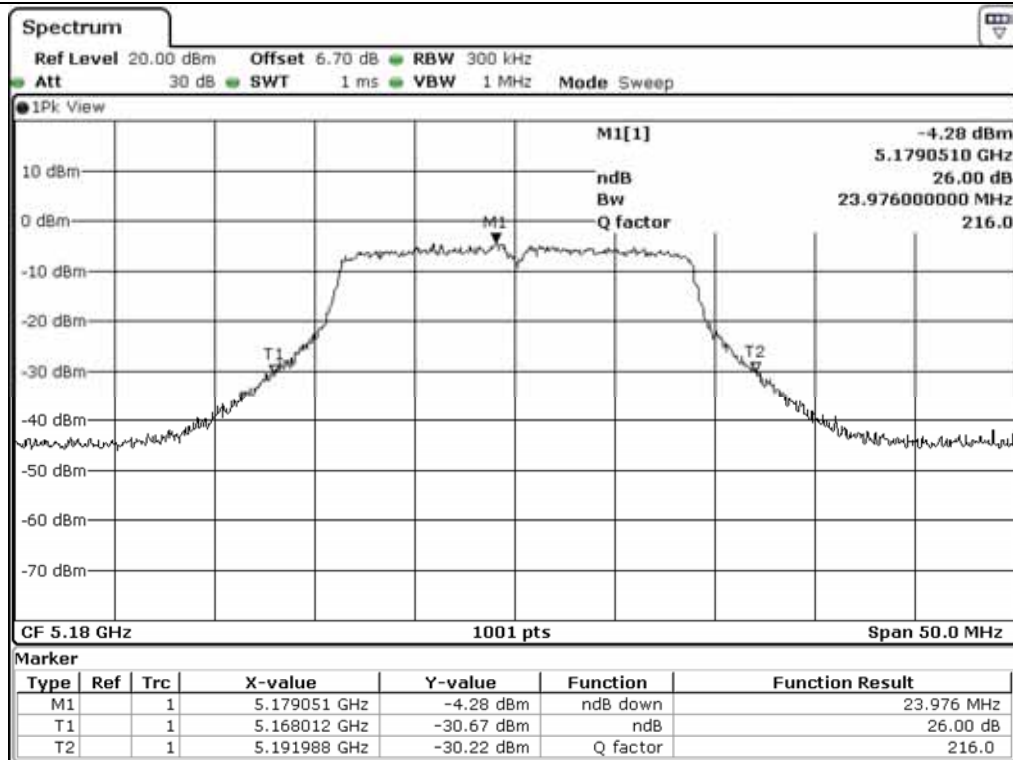


Low Channel (5 180 MHz)

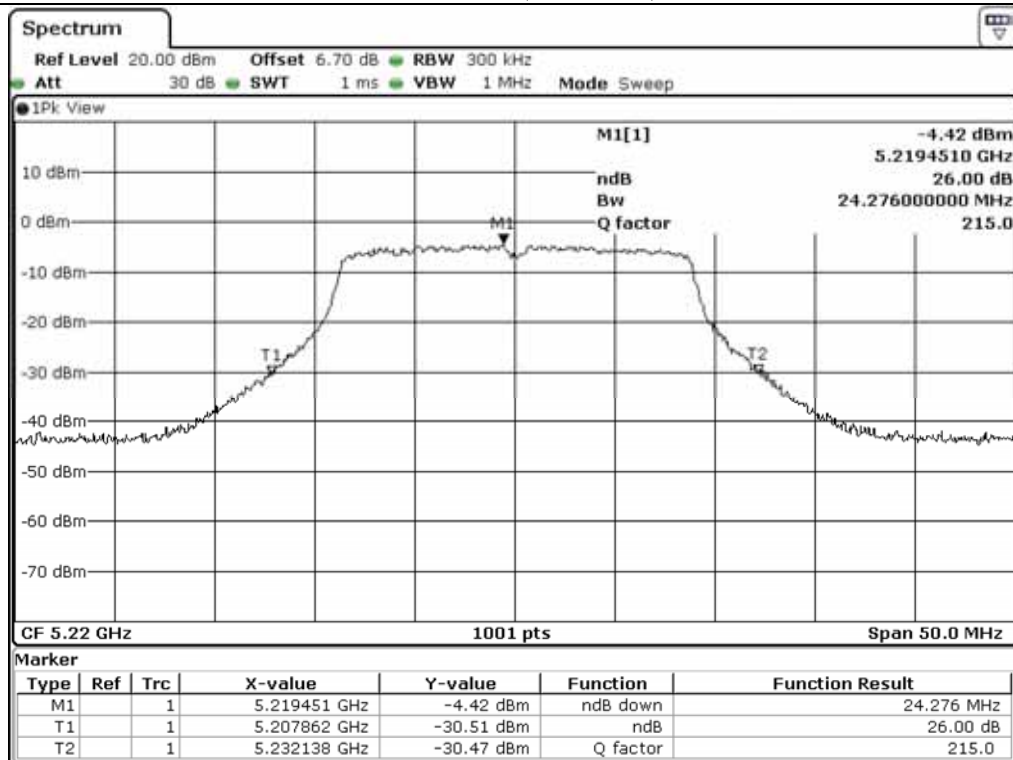


Middle Channel (5 220 MHz)

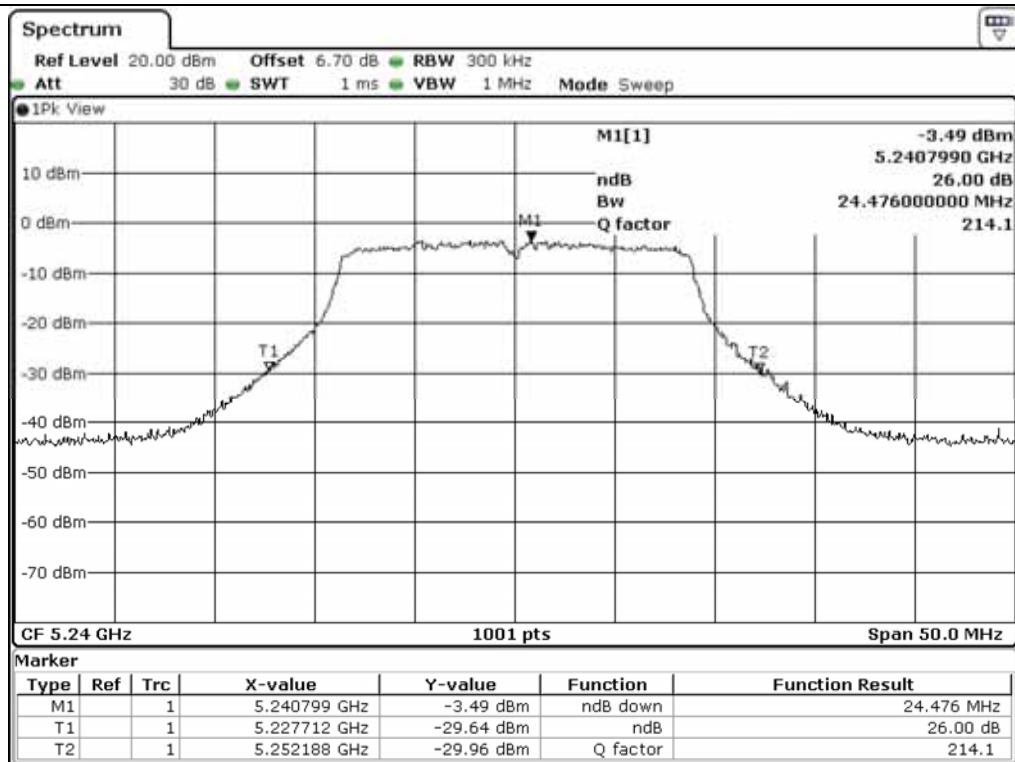


High Channel (5 240 MHz)

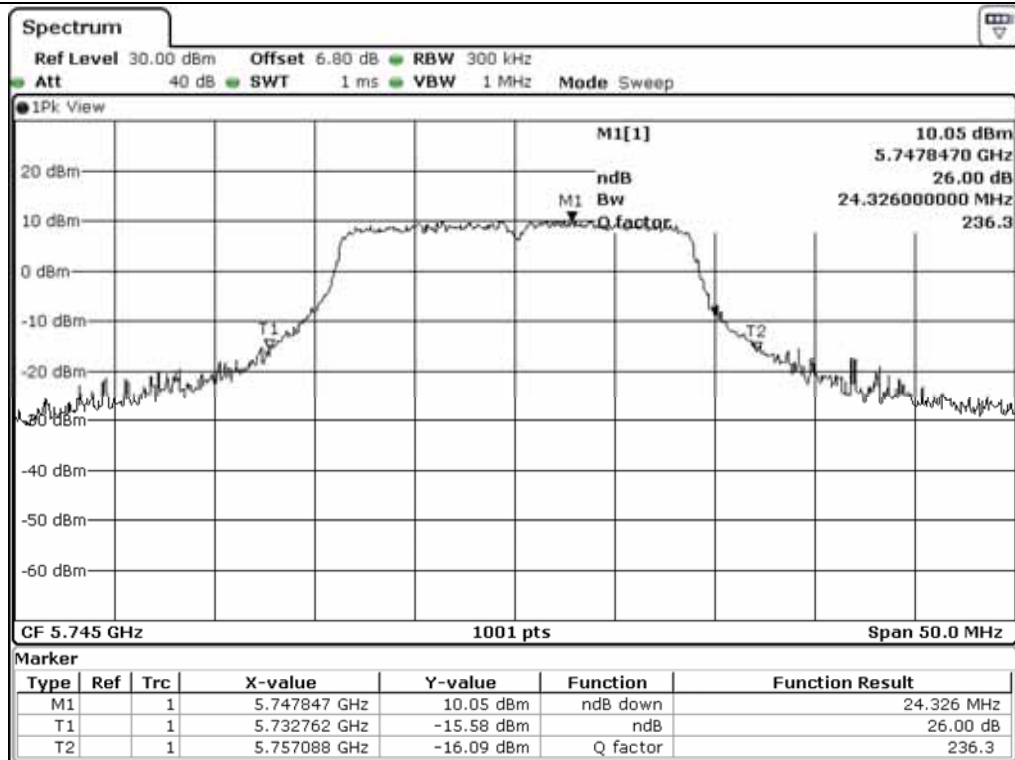

Low Channel (5 745 MHz)

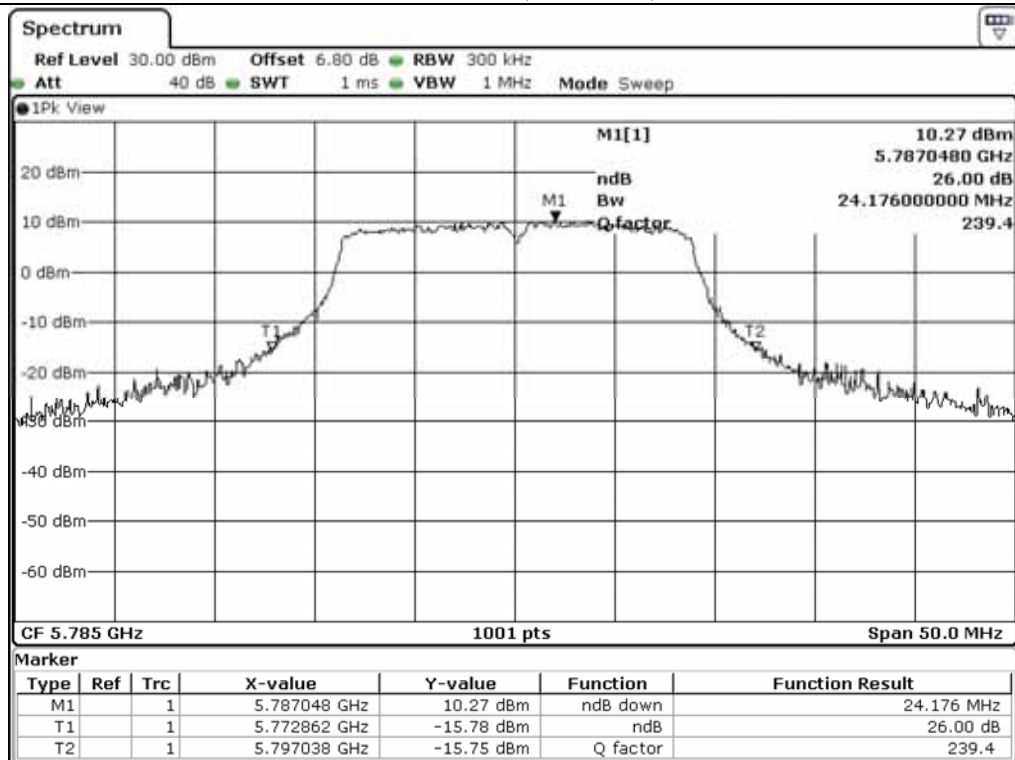

Middle Channel (5 785 MHz)

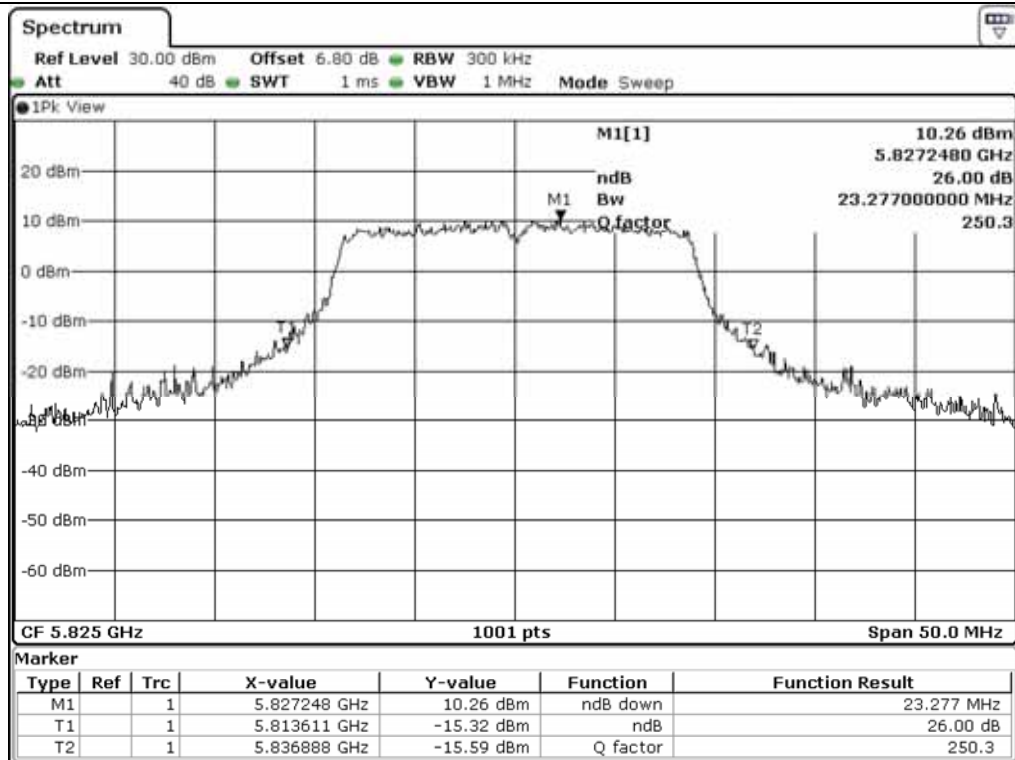

High Channel (5 825 MHz)

7.5.4 Test data for Antenna 3

- Test Date : September 20, 2017 ~ September 27, 2017


- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	24.28
	Middle	5 220.00	24.03
	High	5 240.00	24.08
5 725 ~ 5 850	Low	5 745.00	24.03
	Middle	5 785.00	23.78
	High	5 825.00	23.38


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

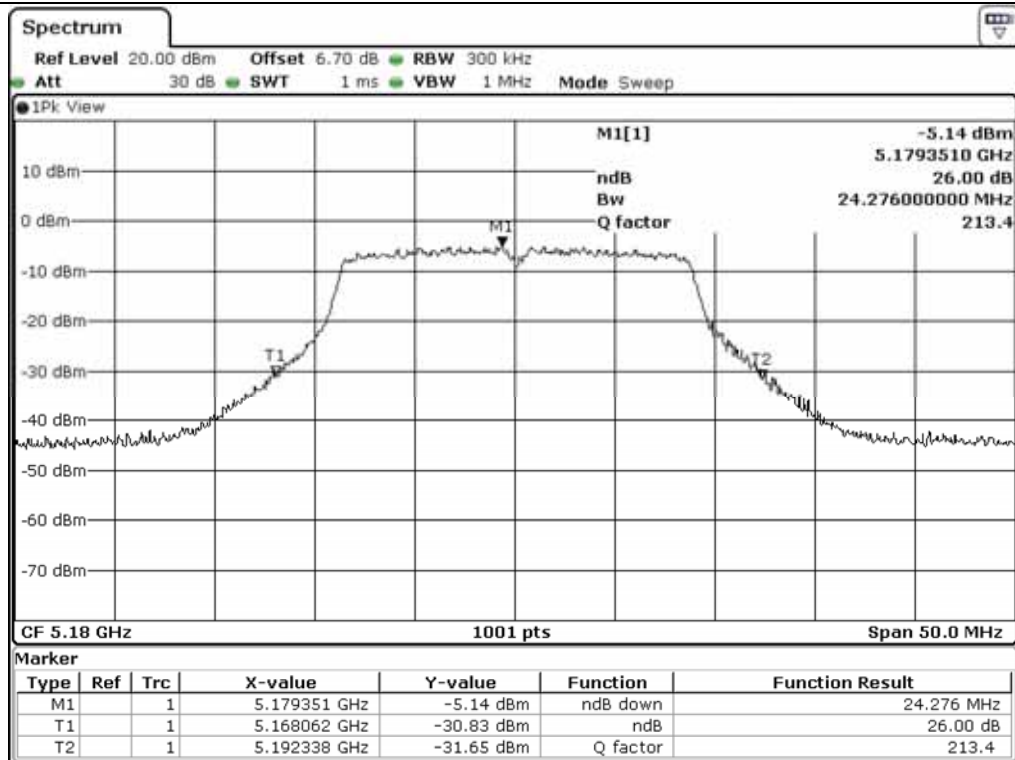


Low Channel (5 180 MHz)

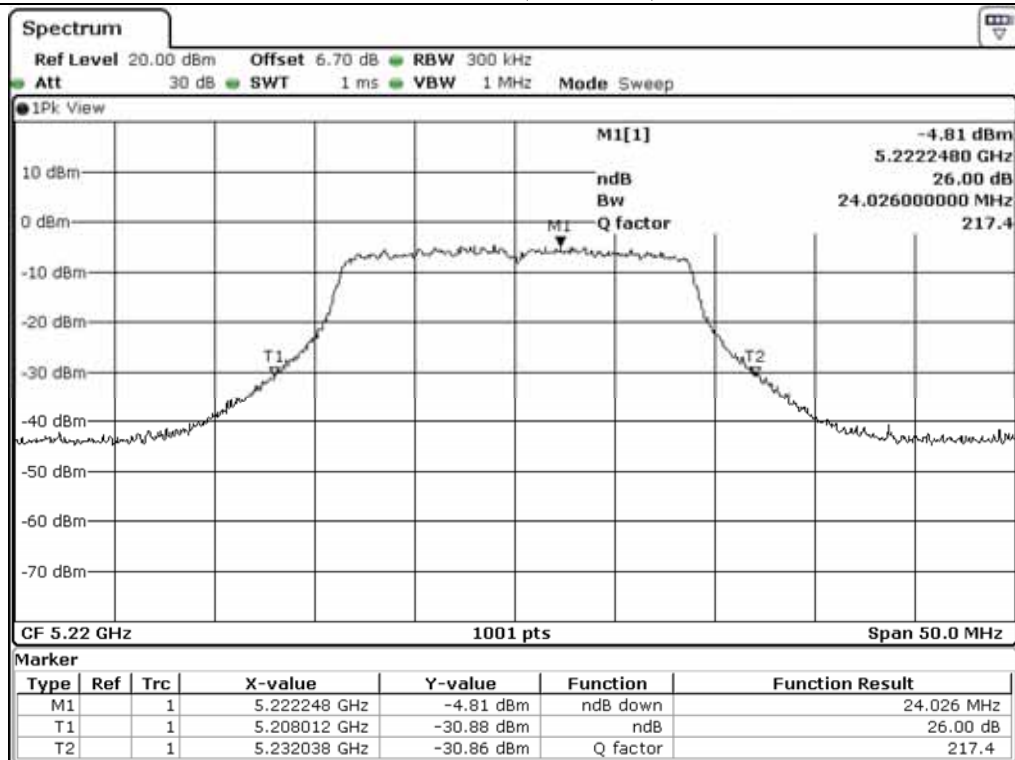


Middle Channel (5 220 MHz)

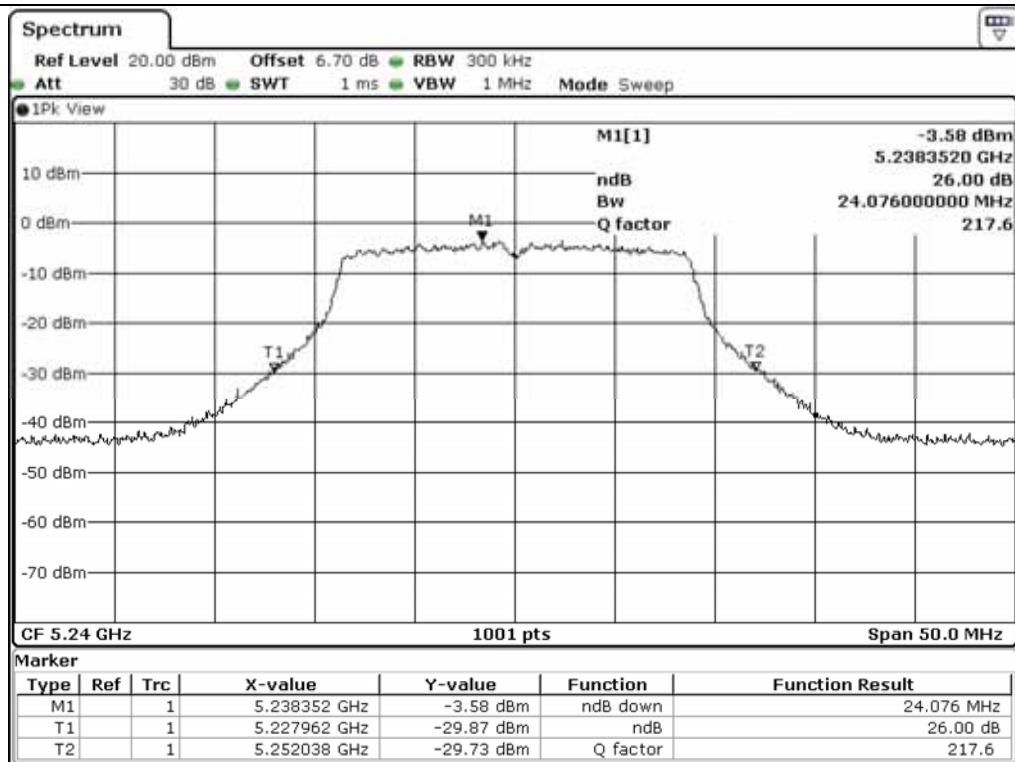


High Channel (5 240 MHz)

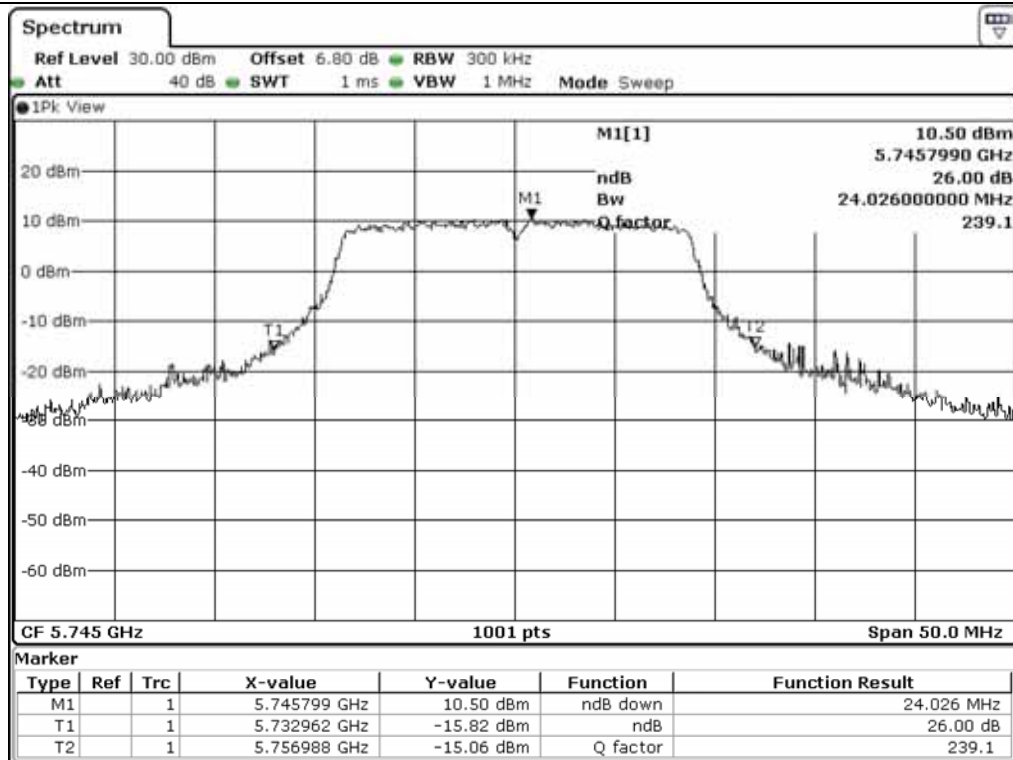

Low Channel (5 745 MHz)

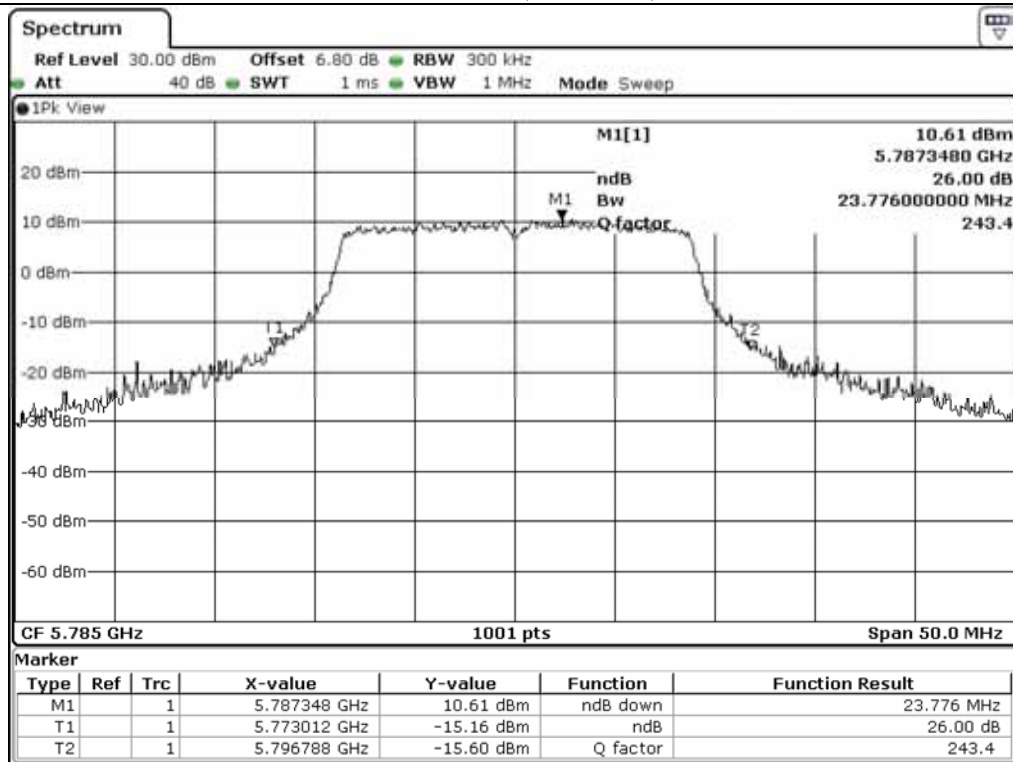

Middle Channel (5 785 MHz)

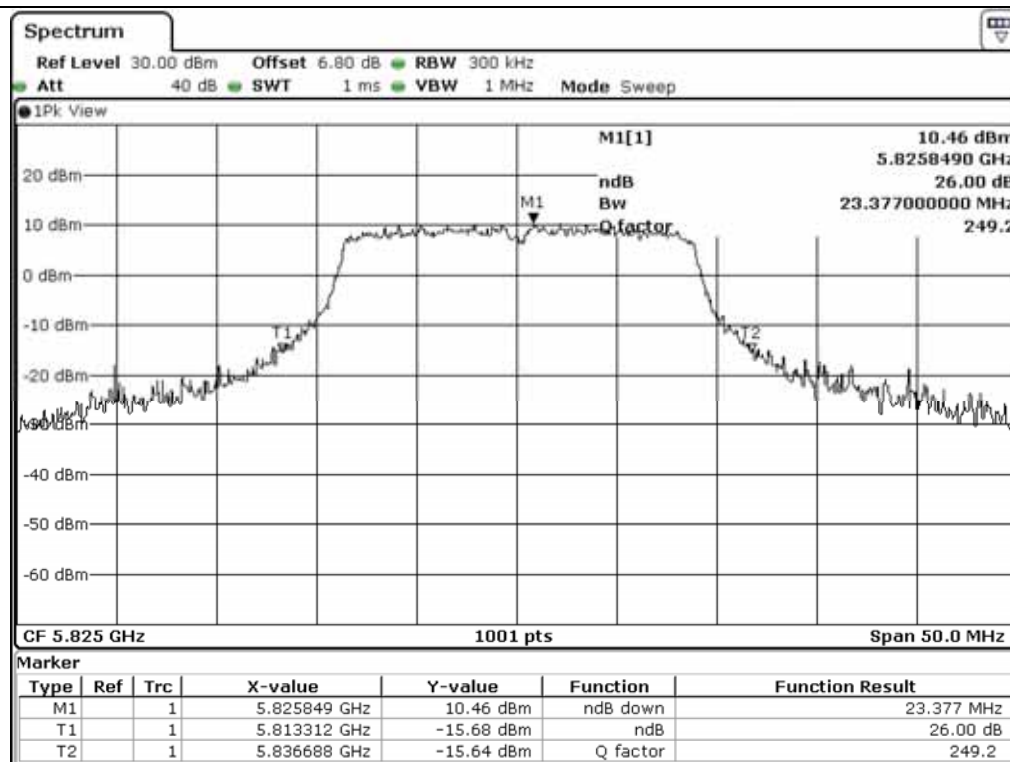

High Channel (5 825 MHz)

7.6 Test data for 802.11n_HT40 RLAN Mode

7.6.1 Test data for Antenna 0

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	44.06
	High	5 230.00	44.56
5 725 ~ 5 850	Low	5 755.00	49.15
	High	5 785.00	49.85


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

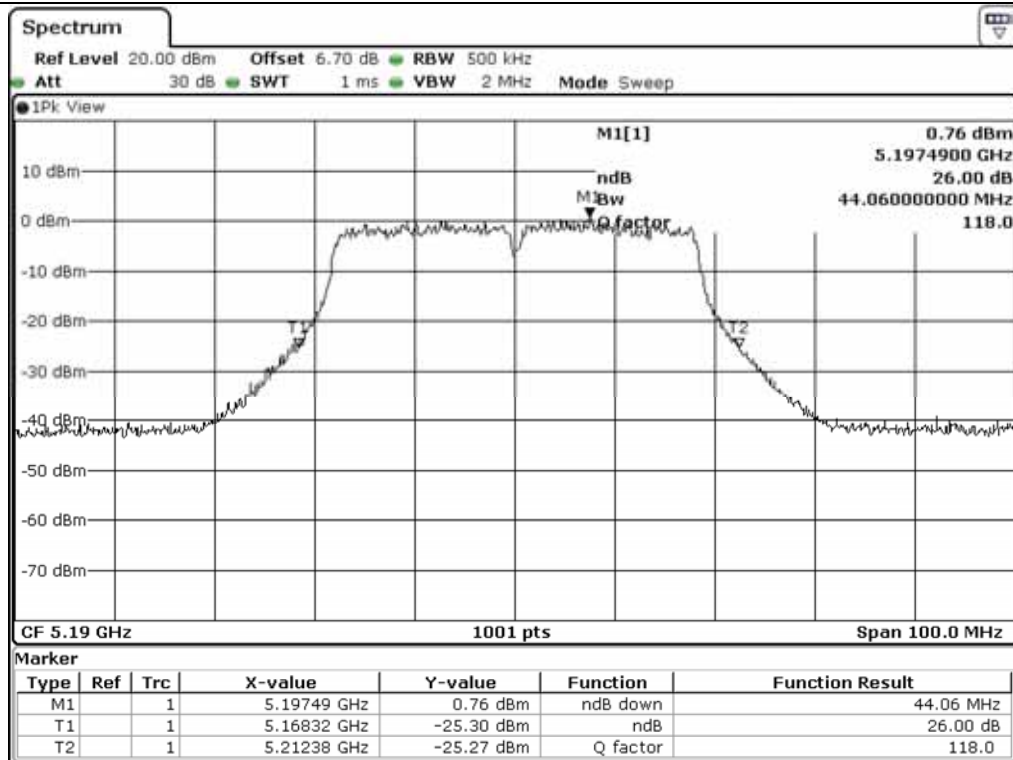


Low Channel (5 190 MHz)

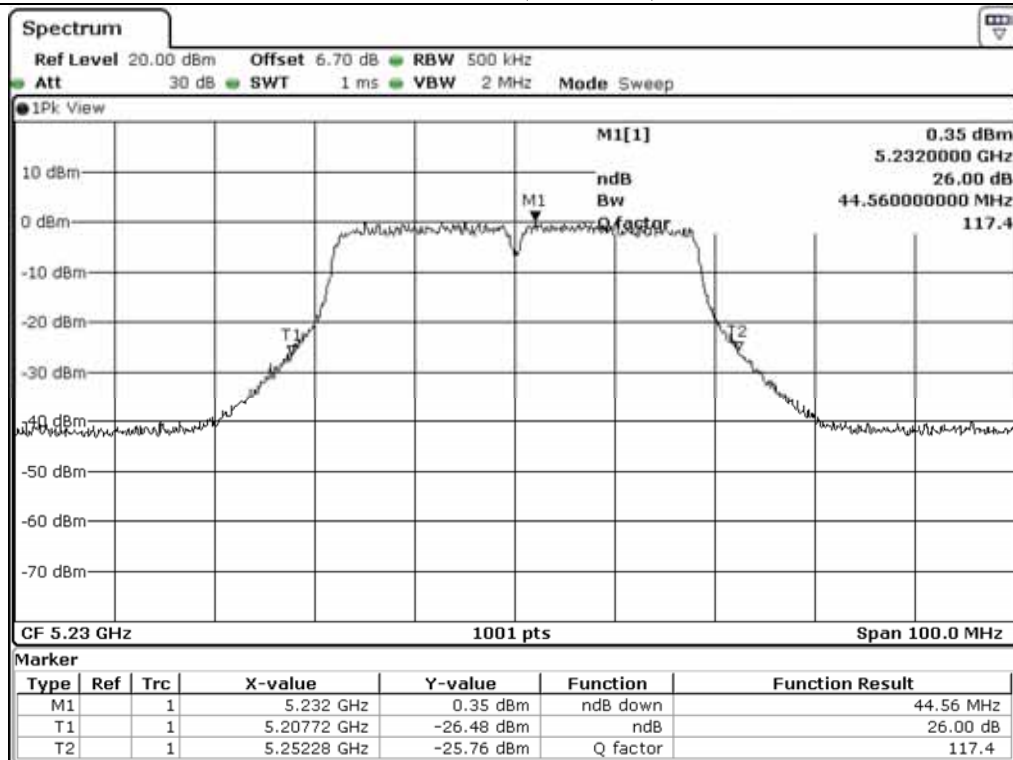

High Channel (5 230 MHz)

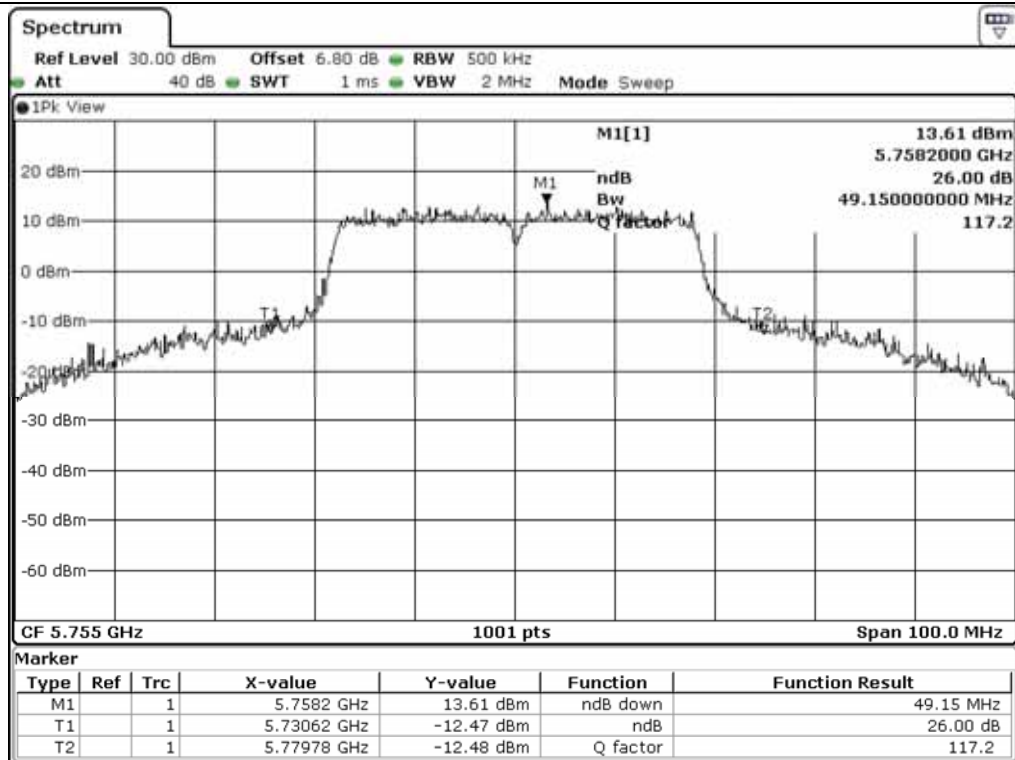

Low Channel (5 755 MHz)

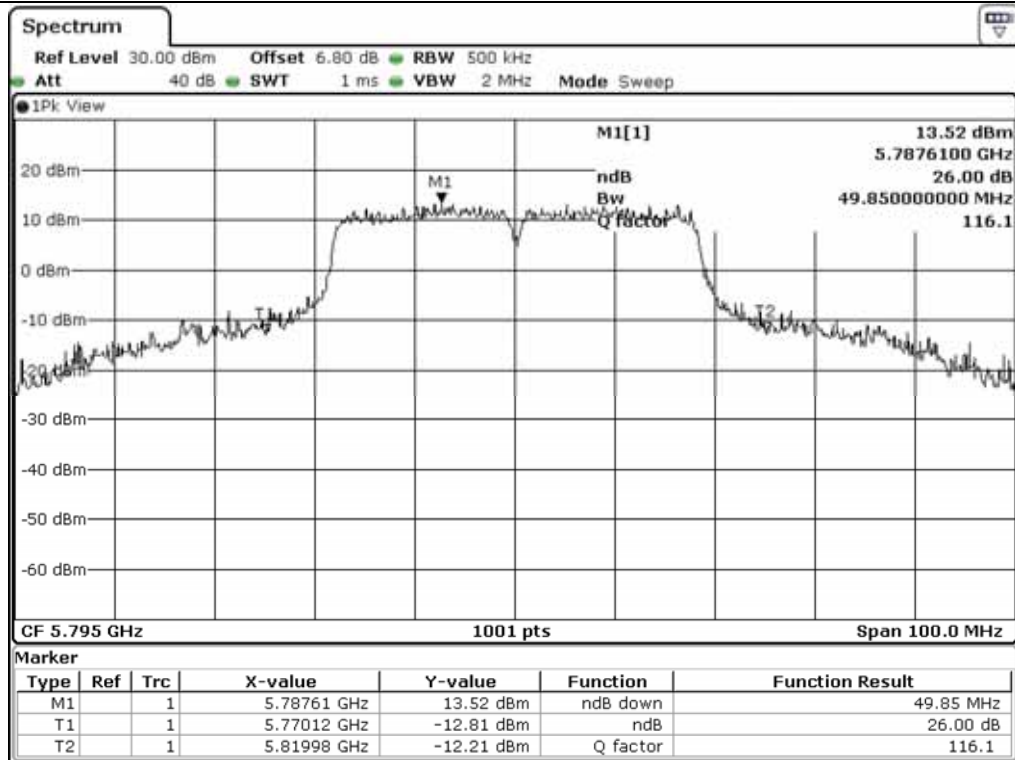

High Channel (5 785 MHz)

7.6.2 Test data for Antenna 1

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	44.66
	High	5 230.00	44.66
5 725 ~ 5 850	Low	5 755.00	49.45
	High	5 785.00	49.35


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

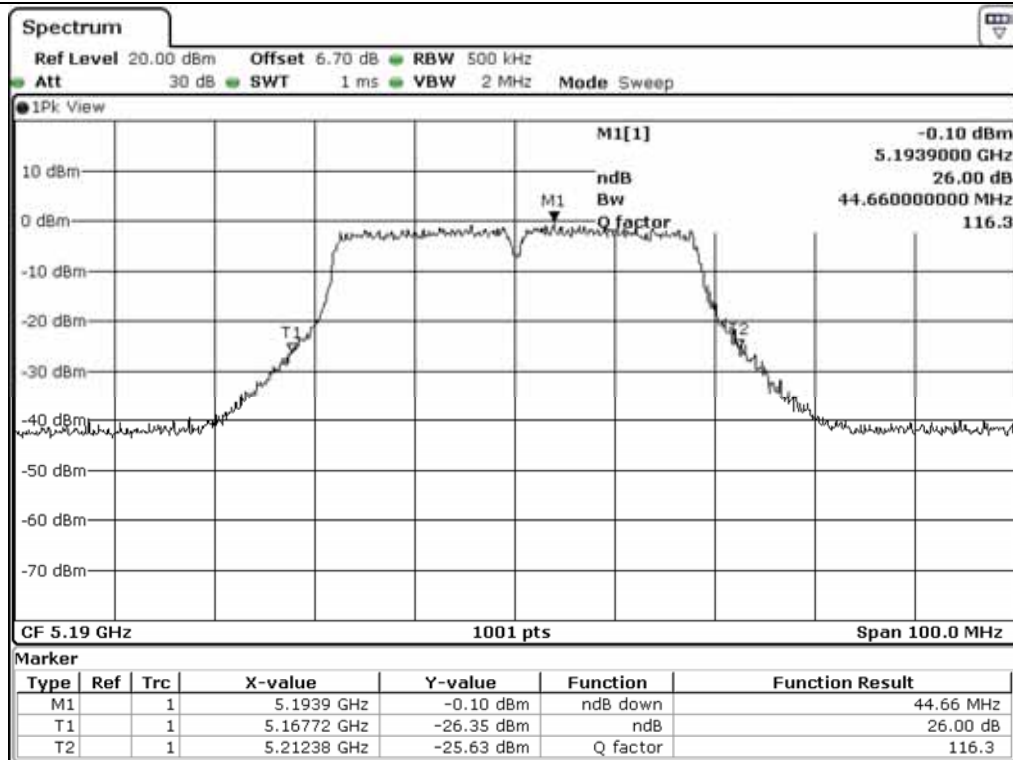


Low Channel (5 190 MHz)

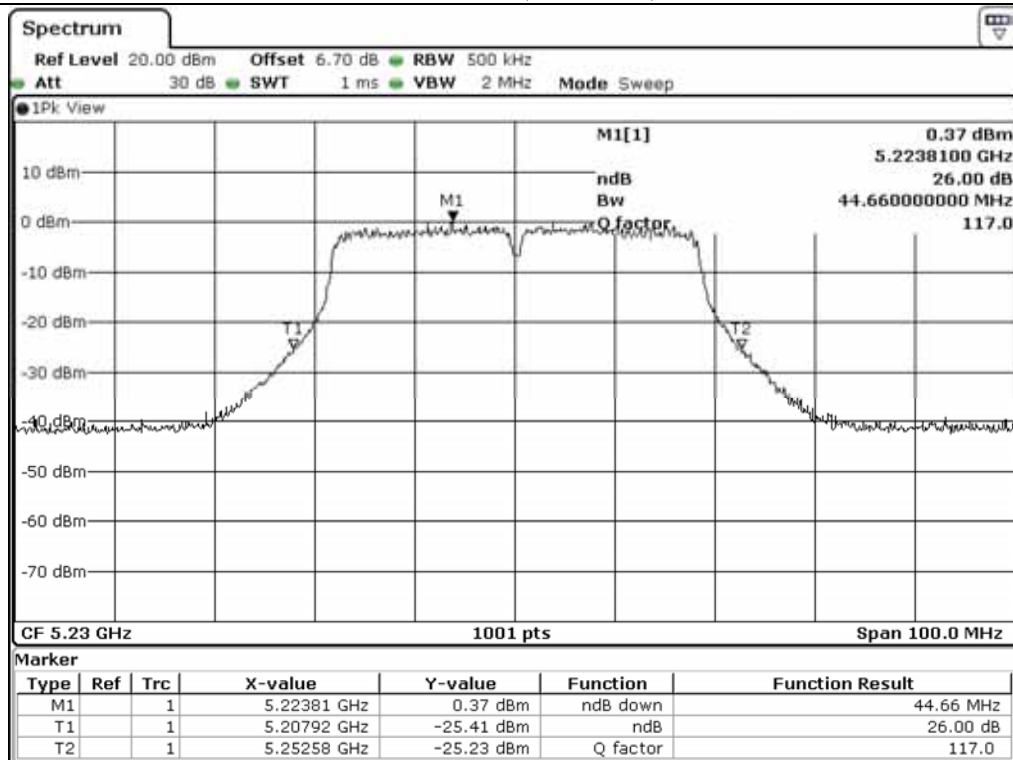

High Channel (5 230 MHz)

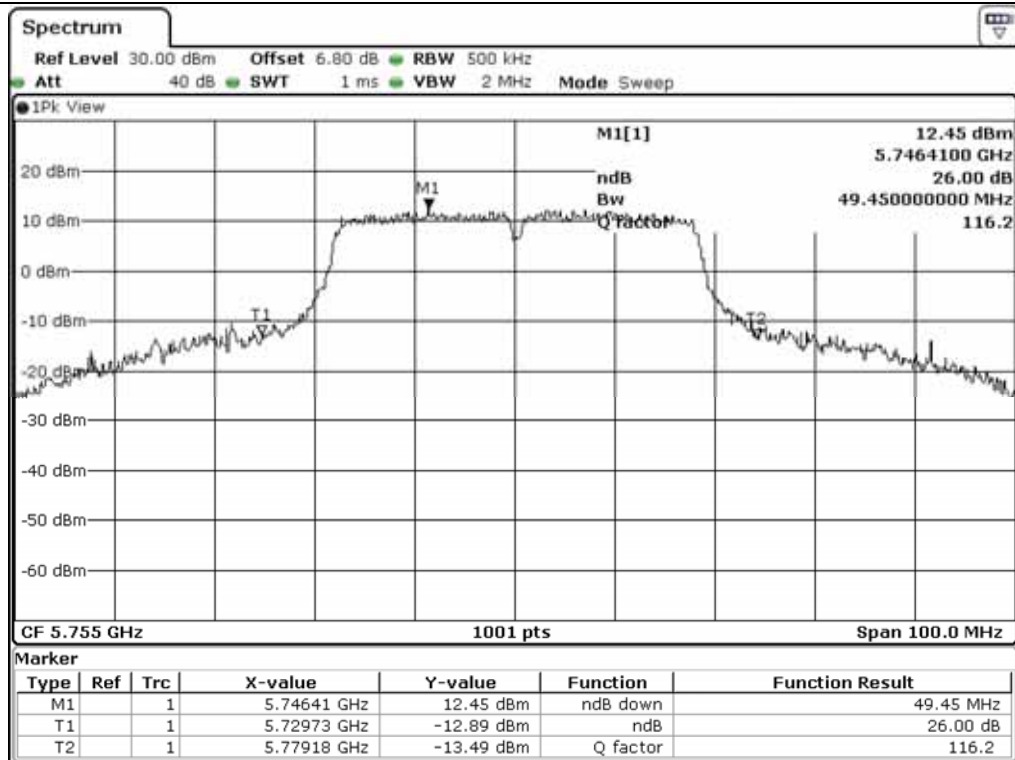

Low Channel (5 755 MHz)

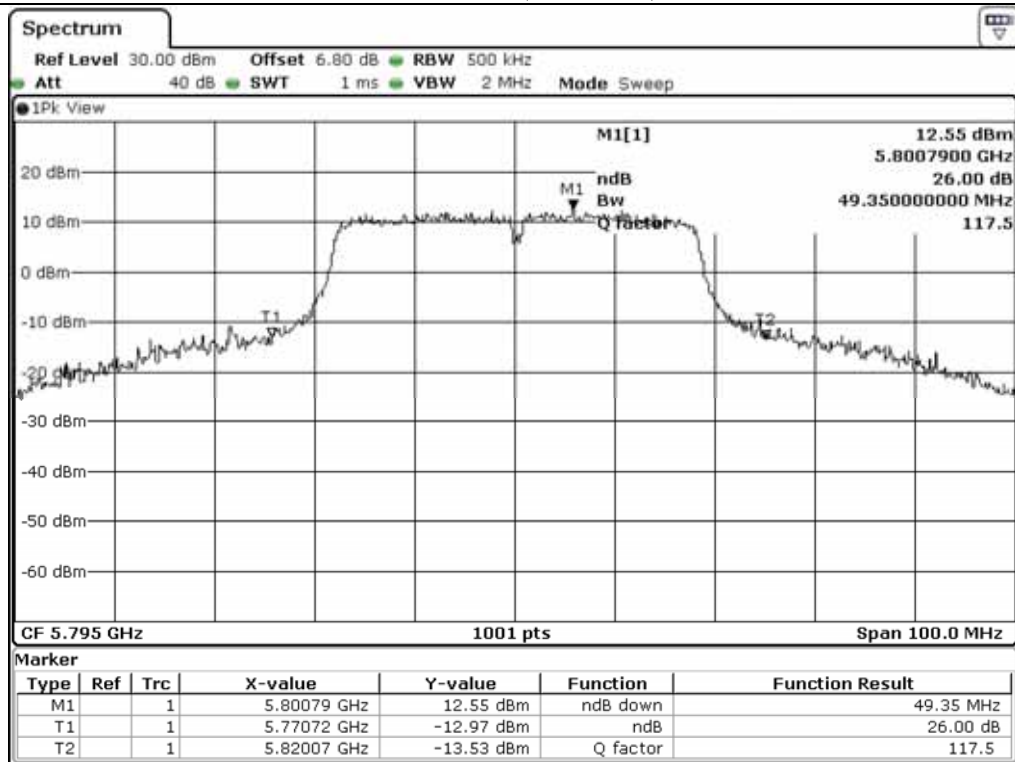

High Channel (5 785 MHz)

7.6.3 Test data for Antenna 2

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	44.56
	High	5 230.00	45.65
5 725 ~ 5 850	Low	5 755.00	48.95
	High	5 785.00	49.25


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

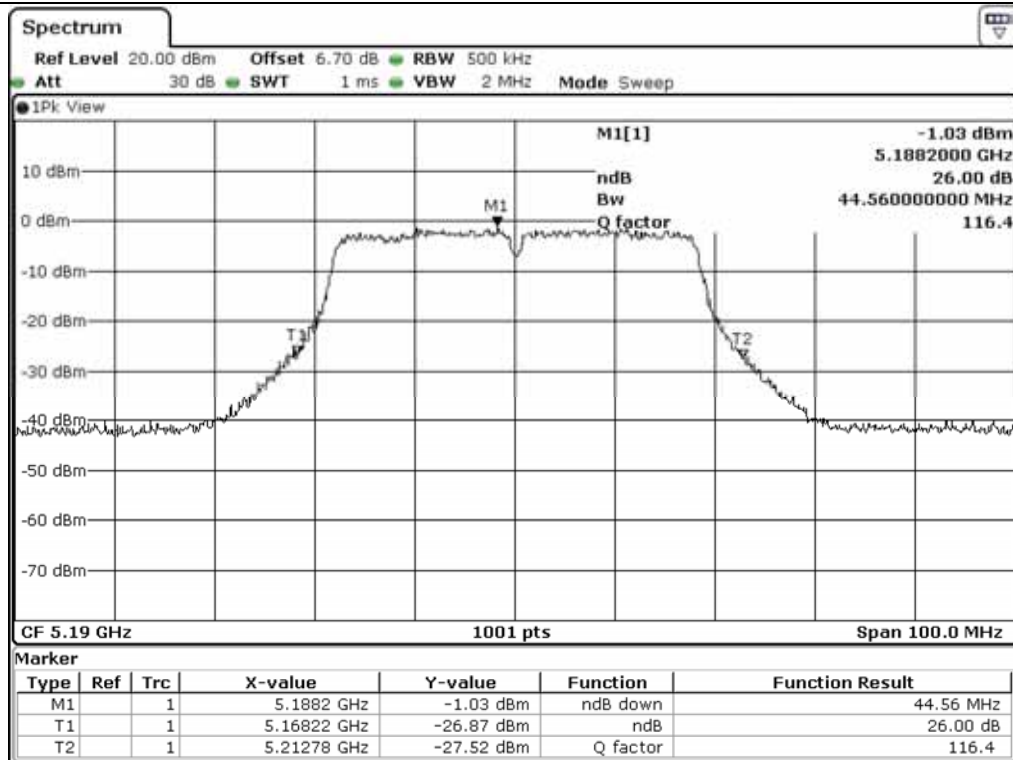


Low Channel (5 190 MHz)

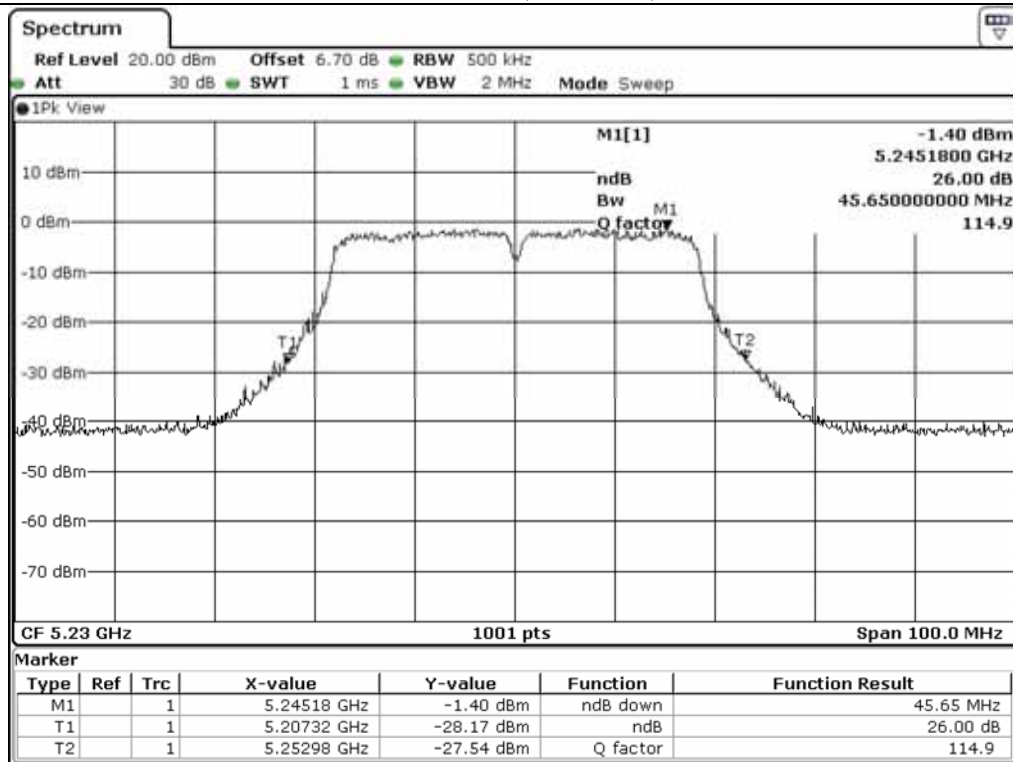

High Channel (5 230 MHz)

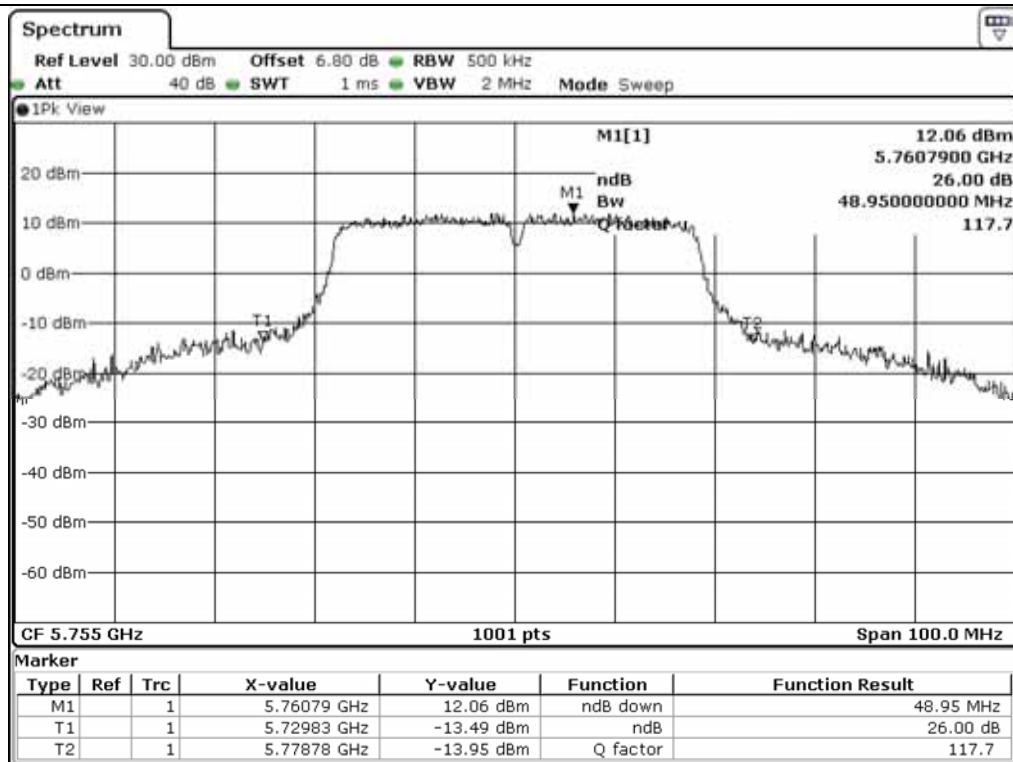

Low Channel (5 755 MHz)

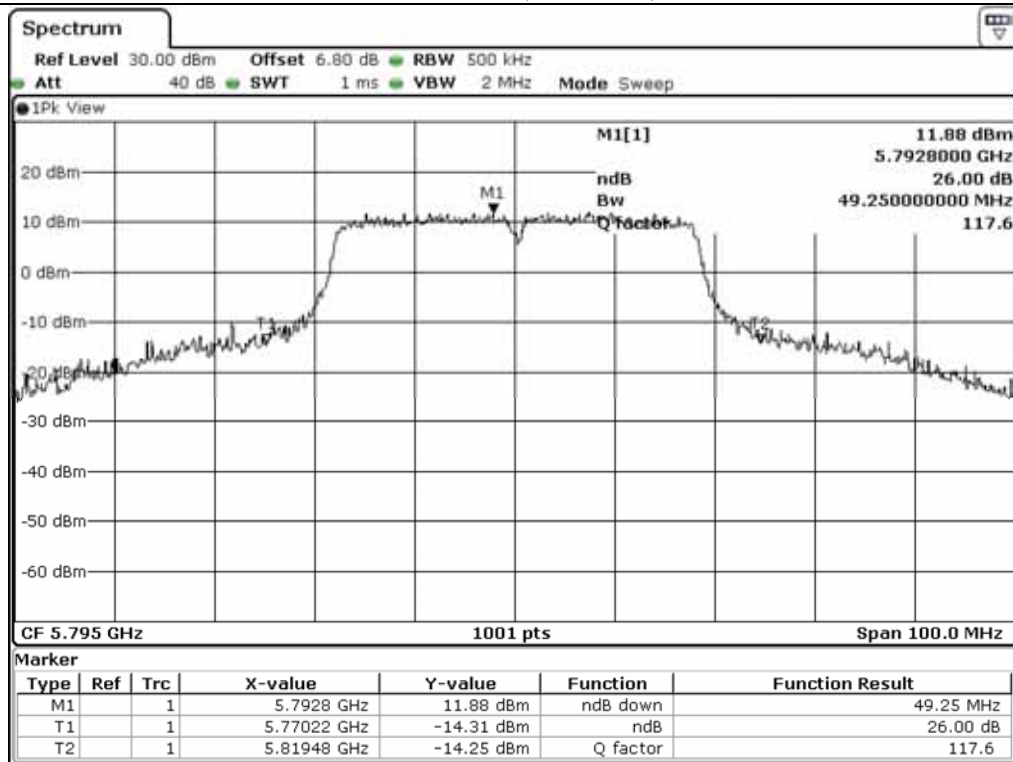

High Channel (5 785 MHz)

7.6.4 Test data for Antenna 3

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	45.95
	High	5 230.00	45.65
5 725 ~ 5 850	Low	5 755.00	49.35
	High	5 785.00	49.45


Remark: See next page for measurement data.




Tested by: Hyung-Kwon, Oh / Assistant Manager

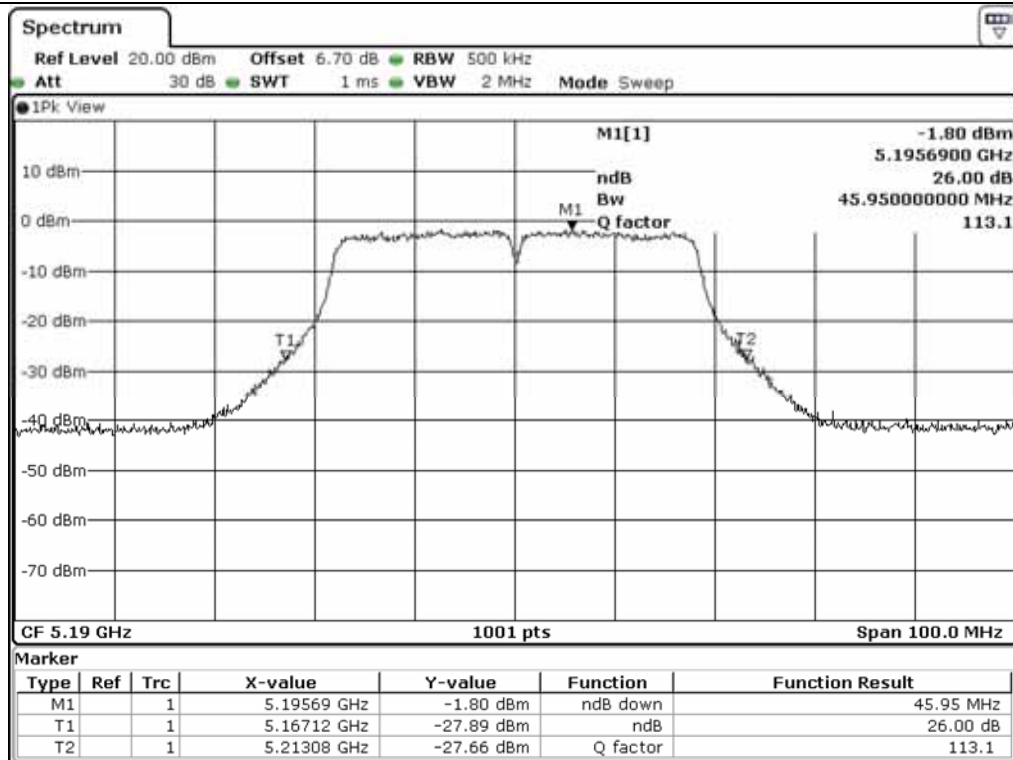


Low Channel (5 190 MHz)

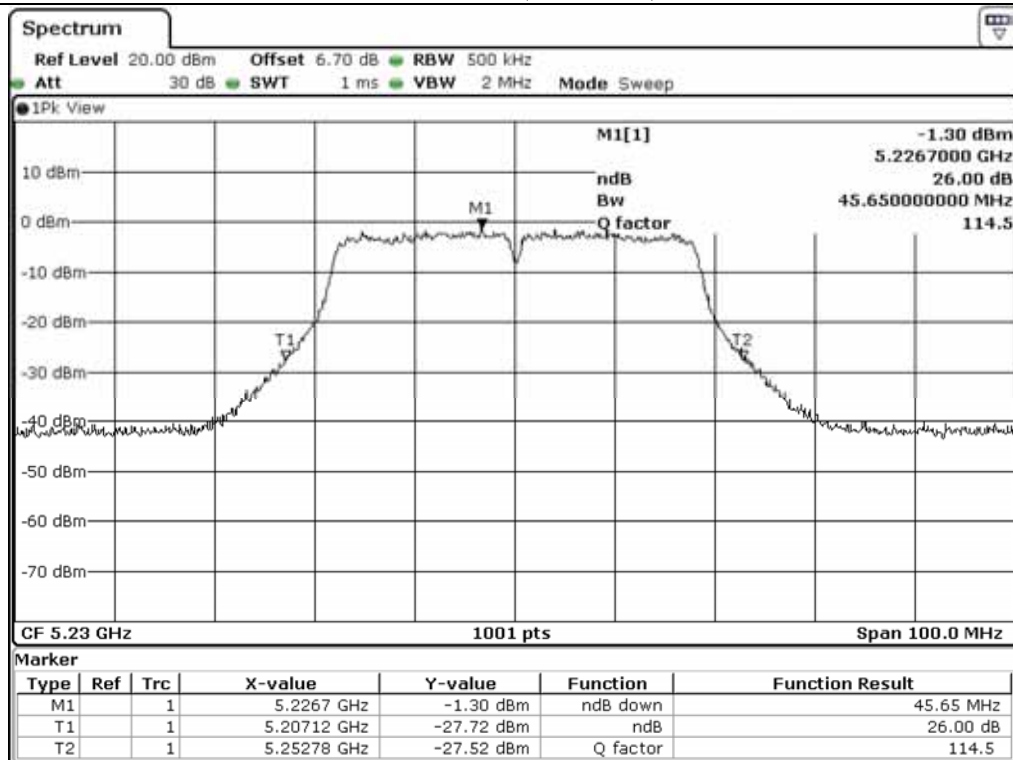

High Channel (5 230 MHz)

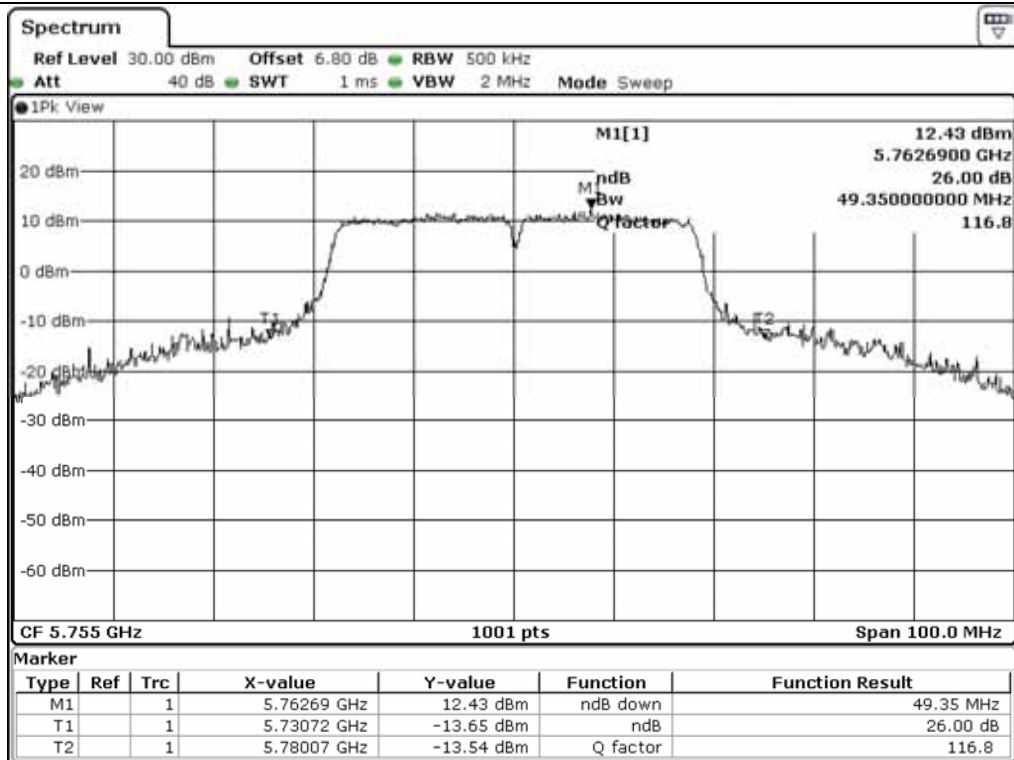

Low Channel (5 755 MHz)

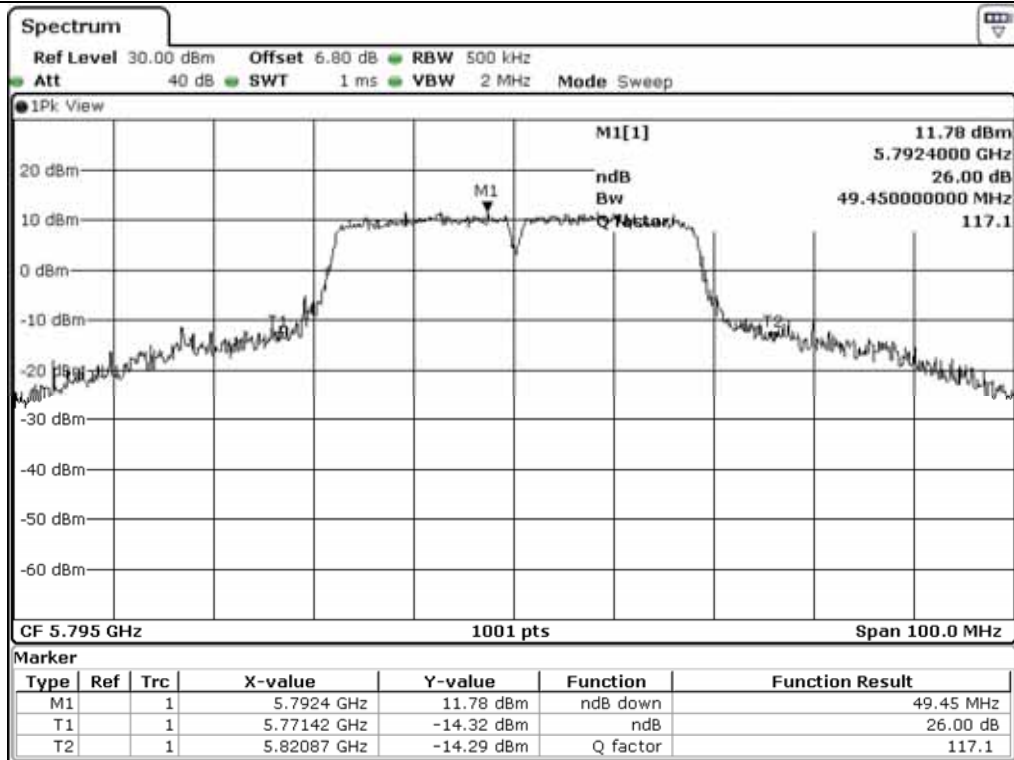

High Channel (5 785 MHz)

7.7 Test data for 802.11ac_VHT80 RLAN Mode

7.7.1 Test data for Antenna 0

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	84.72
5 725 ~ 5 850	Middle	5 775.00	94.91


Remark: See next page for measurement data.



Tested by: Hyung-Kwon, Oh / Assistant Manager

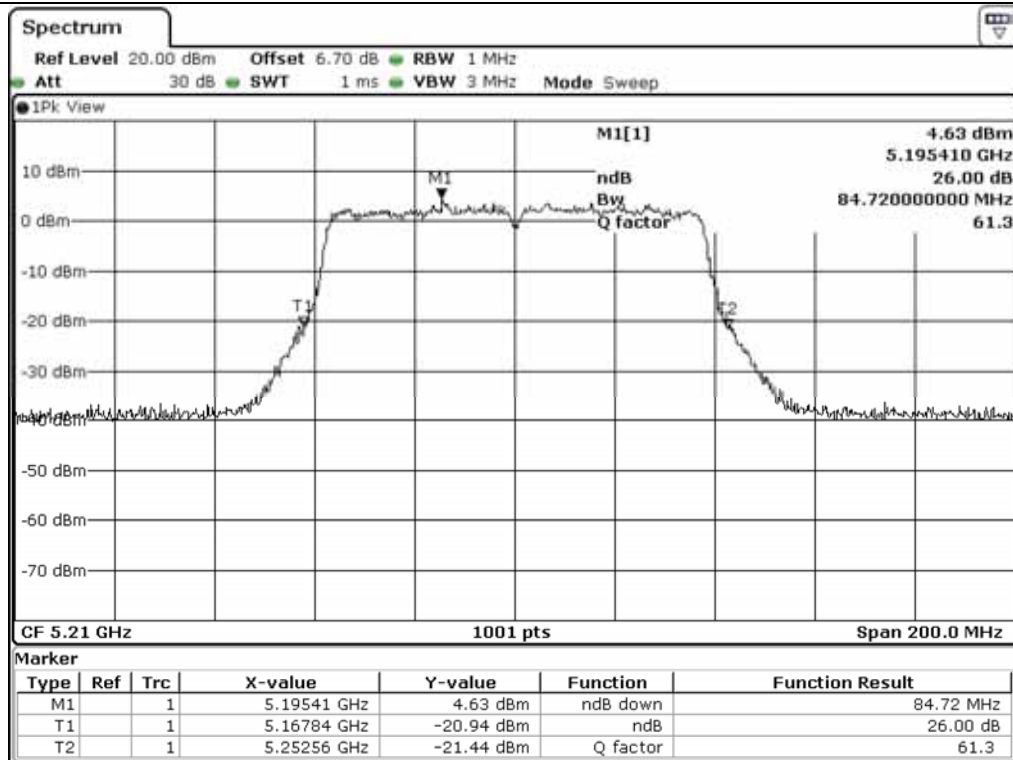

Middle Channel (5 210 MHz)

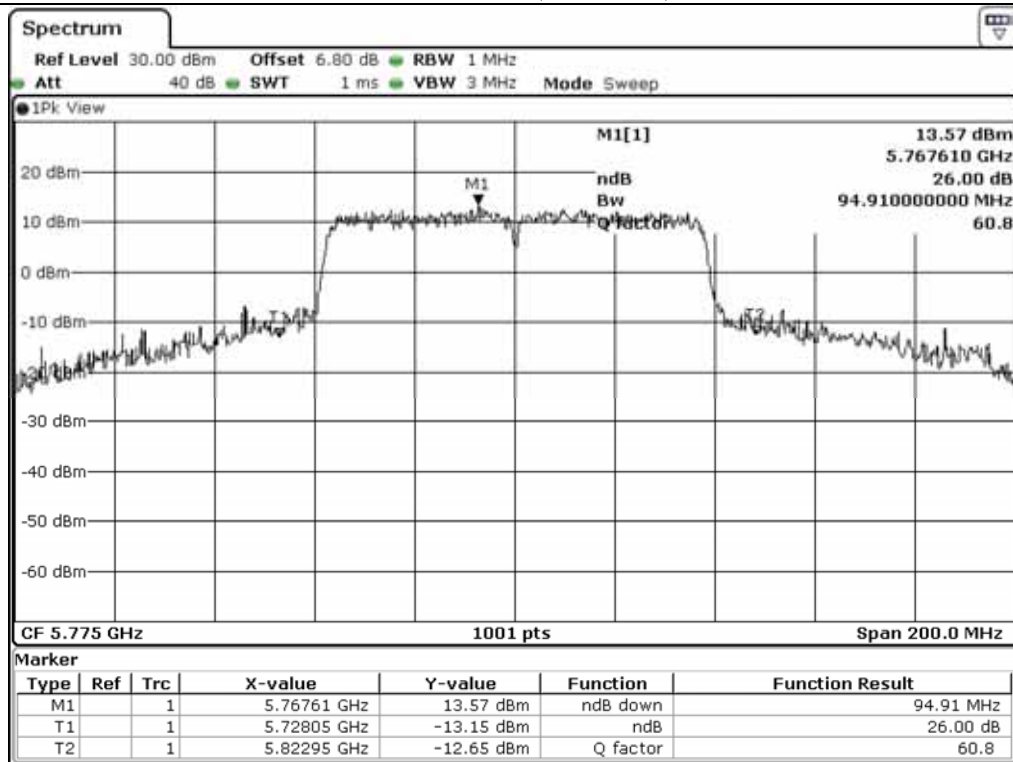

Middle Channel (5 775 MHz)

7.7.2 Test data for Antenna 1

- Test Date : September 20, 2017 ~ September 27, 2017


- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	86.91
5 725 ~ 5 850	Middle	5 775.00	95.70


Remark: See next page for measurement data.



Tested by: Hyung-Kwon, Oh / Assistant Manager

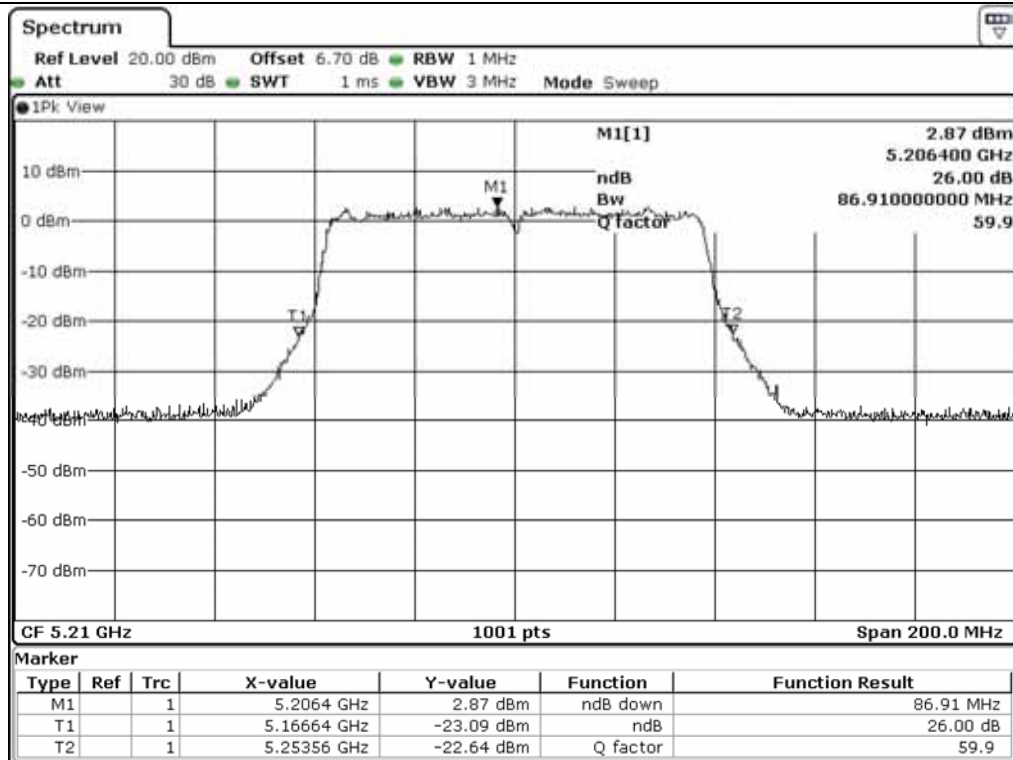

Middle Channel (5 210 MHz)

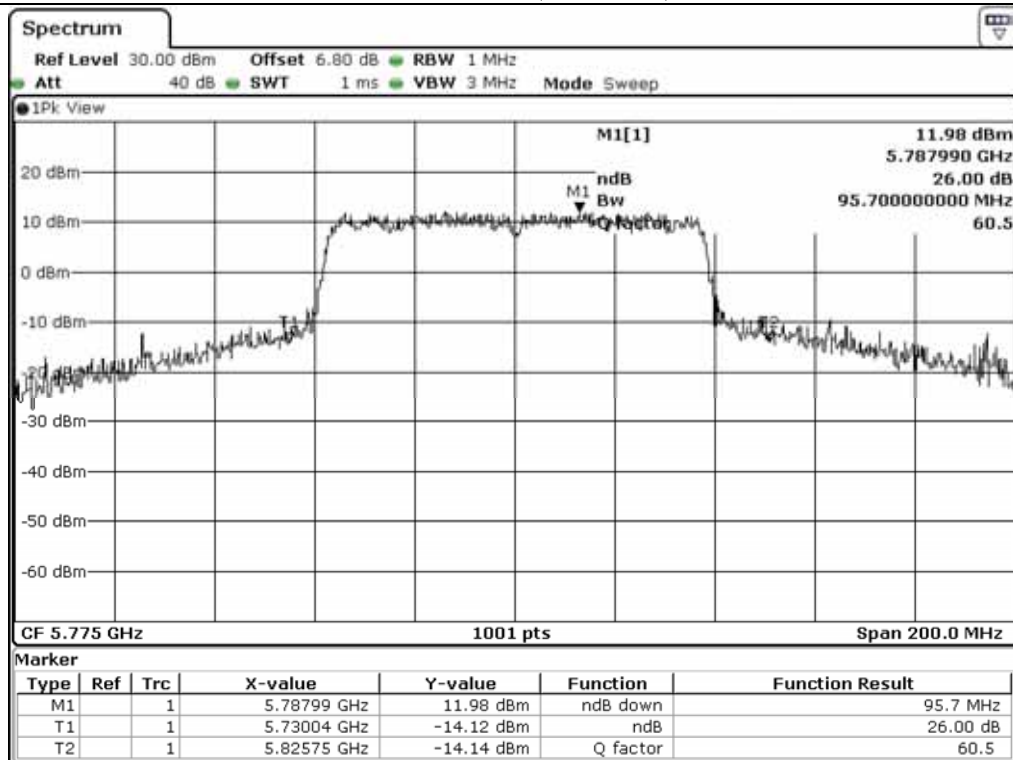

Middle Channel (5 775 MHz)

7.7.3 Test data for Antenna 2

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	86.31
5 725 ~ 5 850	Middle	5 775.00	94.91


Remark: See next page for measurement data.



Tested by: Hyung-Kwon, Oh / Assistant Manager

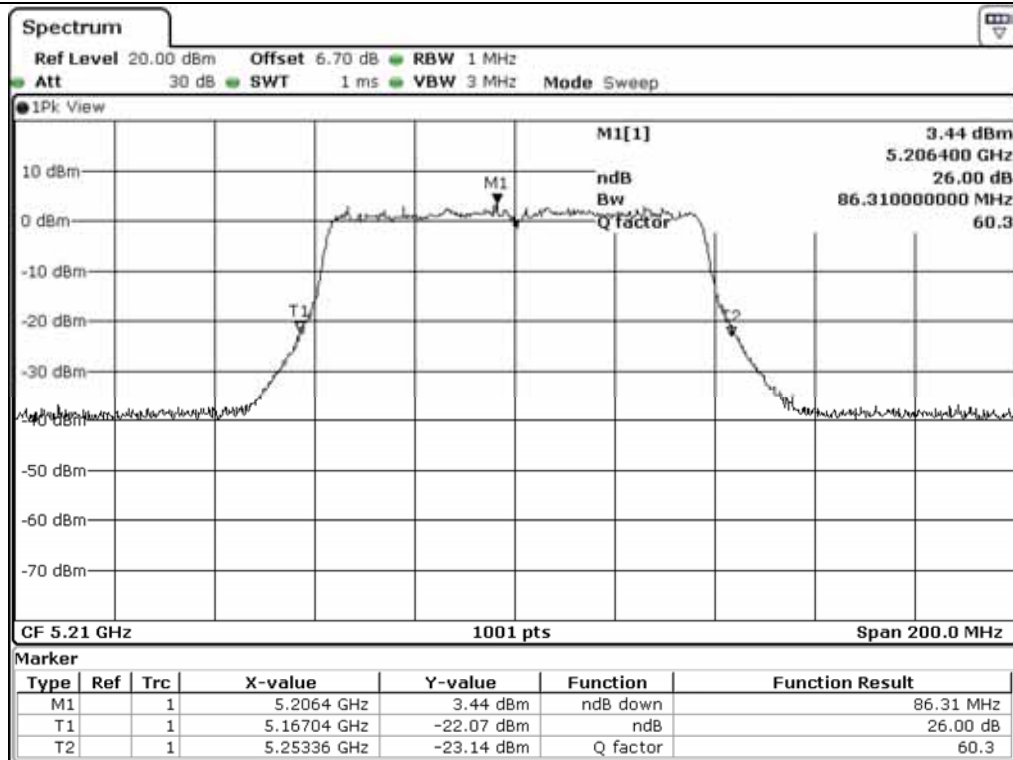

Middle Channel (5 210 MHz)

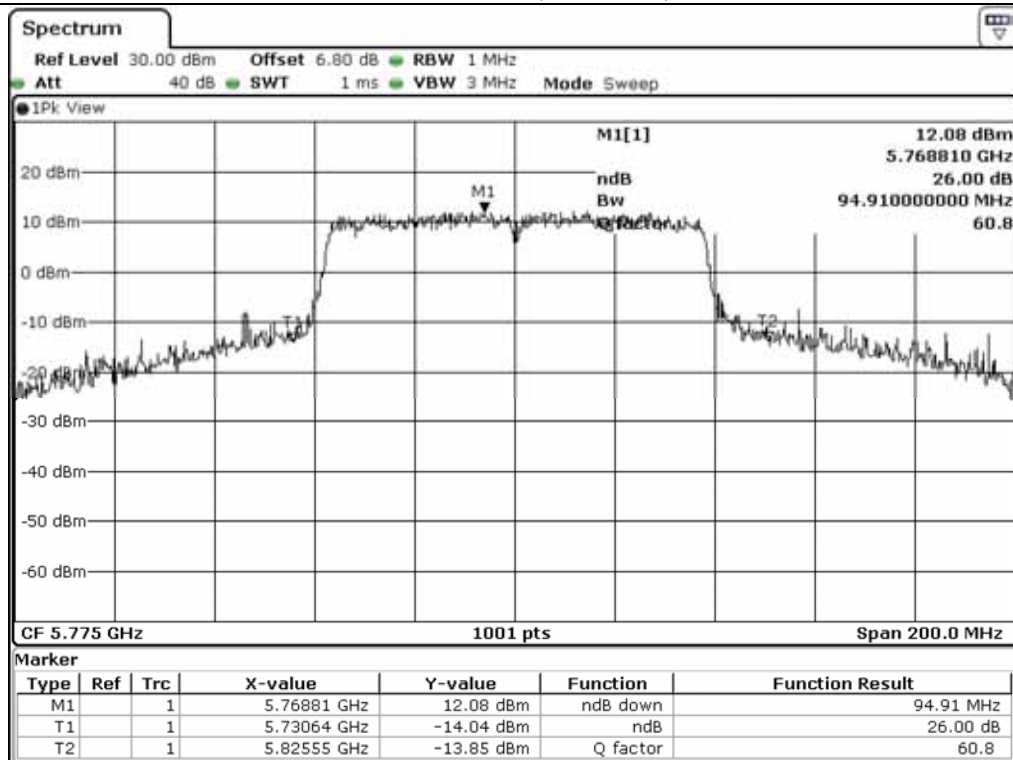

Middle Channel (5 775 MHz)

7.7.4 Test data for Antenna 3

- Test Date : September 20, 2017 ~ September 27, 2017


- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	87.91
5 725 ~ 5 850	Middle	5 775.00	94.51


Remark: See next page for measurement data.



Tested by: Hyung-Kwon, Oh / Assistant Manager

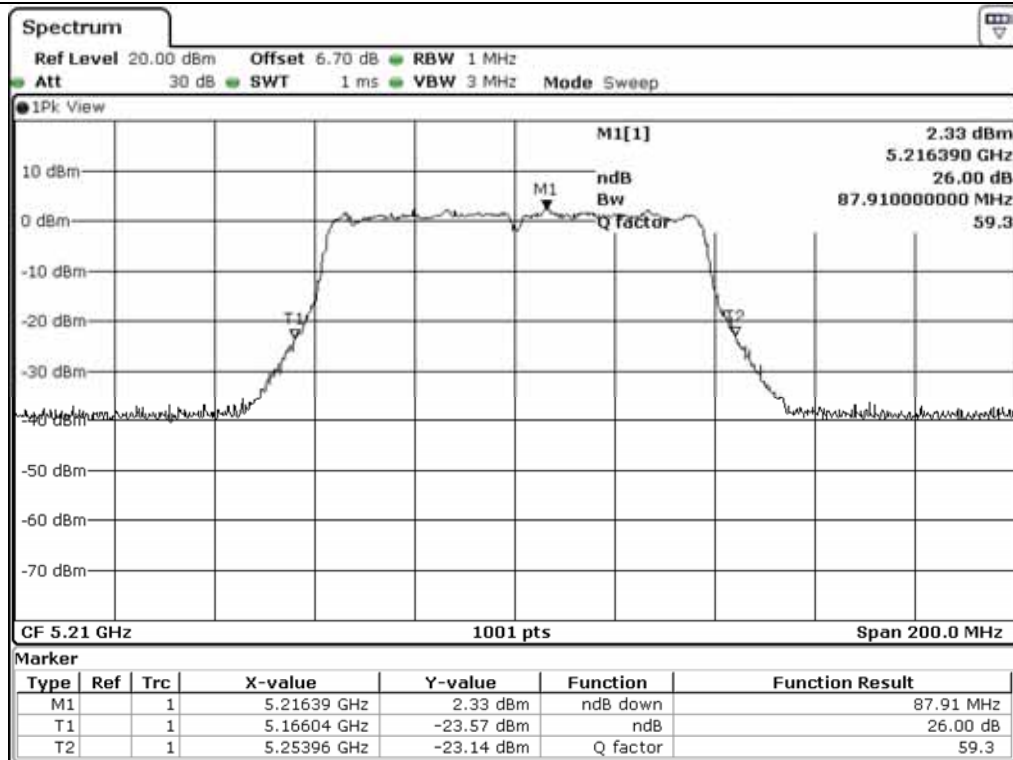

Middle Channel (5 210 MHz)

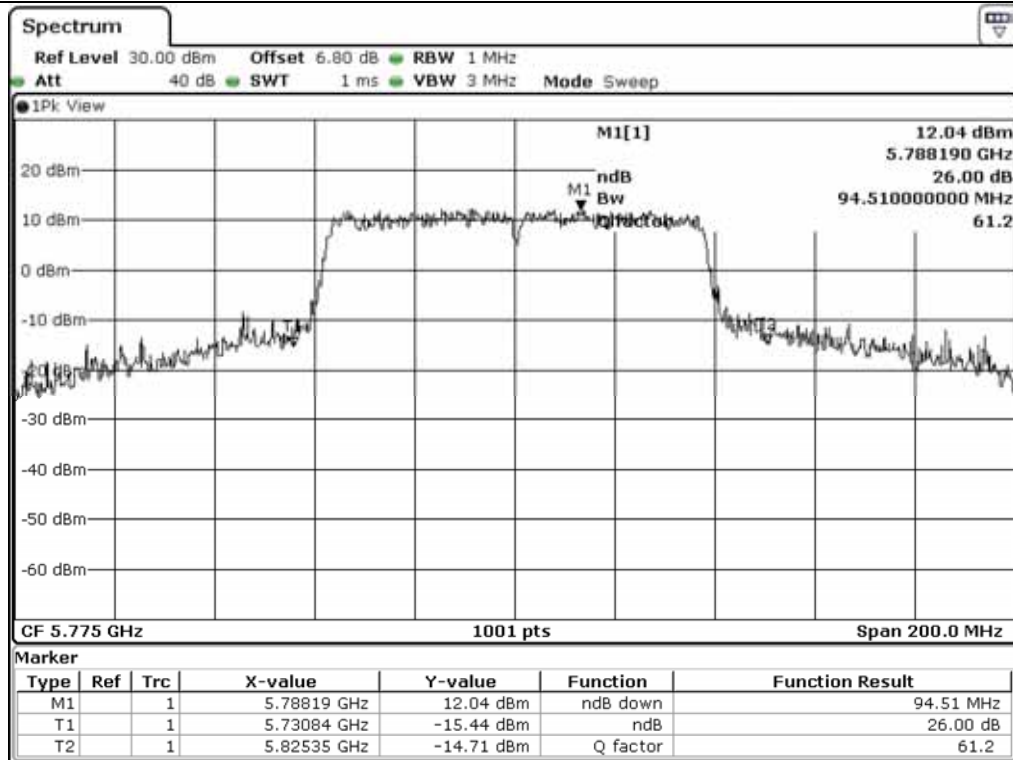

Middle Channel (5 775 MHz)

8. 6 dB BANDWIDTH


8.1 Operating environment

Temperature : 23 °C

Relative humidity : 41 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.



8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101199	Apr. 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 802.11a RLAN Mode


8.4.1 Test data for Antenna 0


- Test Date : September 20, 2017 ~ September 27, 2017

- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.33
	Middle	5 785.00	16.33
	High	5 825.00	16.33

Tested by: Hyung-Kwon, Oh / Assistant Manager

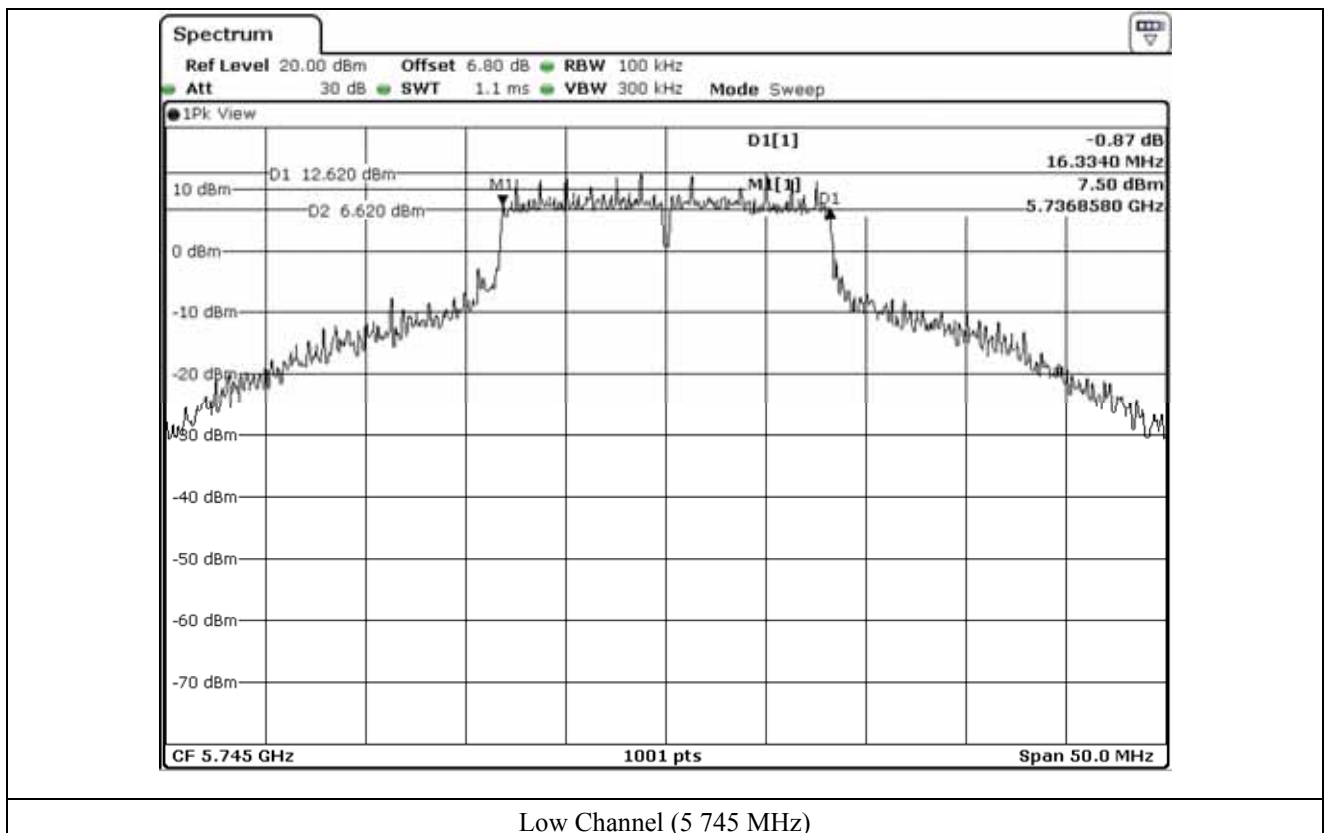

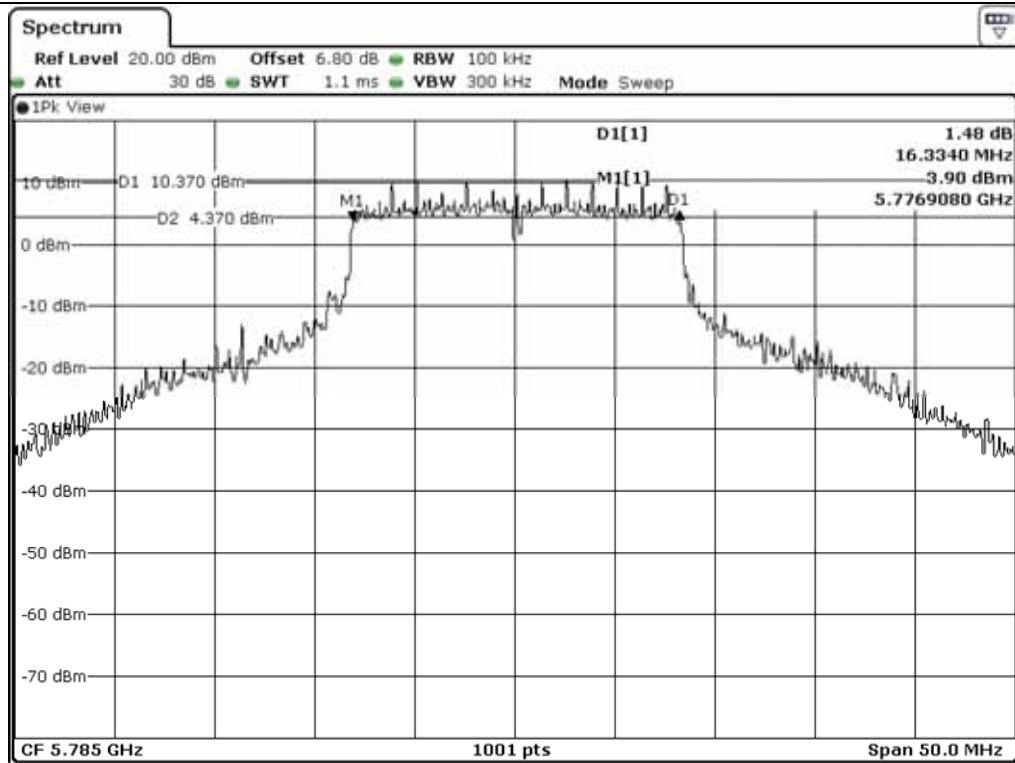

Middle Channel (5.785 MHz)

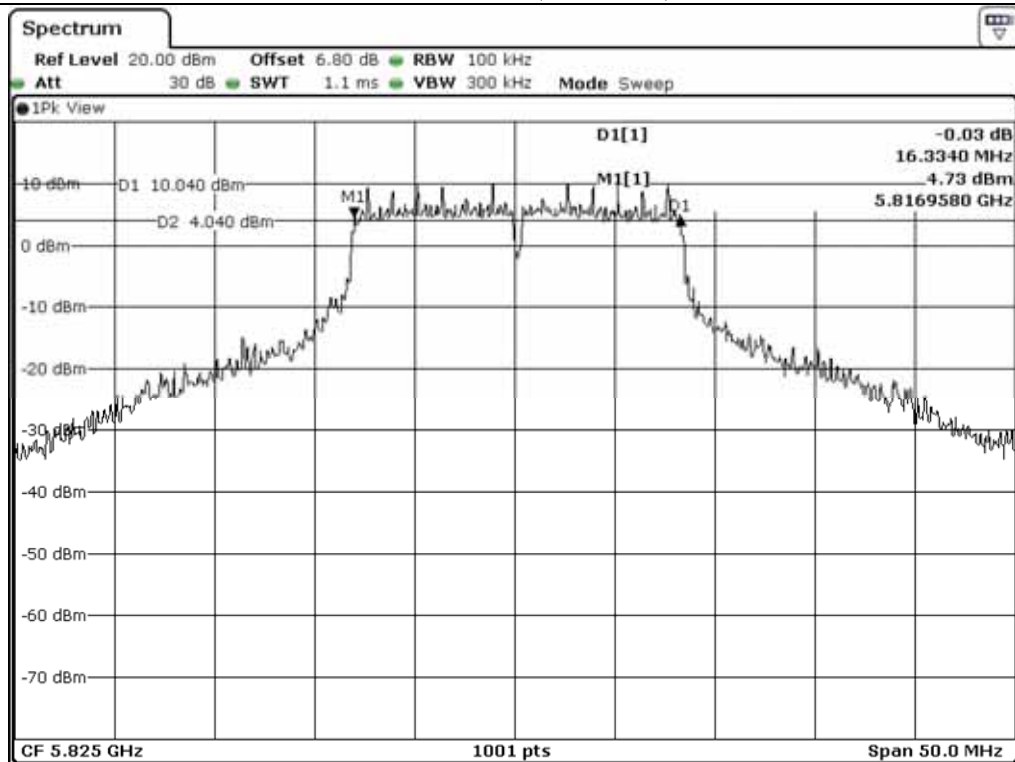

High Channel (5.825 MHz)


8.4.2 Test data for Antenna 1


- Test Date : September 20, 2017 ~ September 27, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.33
	Middle	5 785.00	16.28
	High	5 825.00	16.28




Tested by: Hyung-Kwon, Oh / Assistant Manager

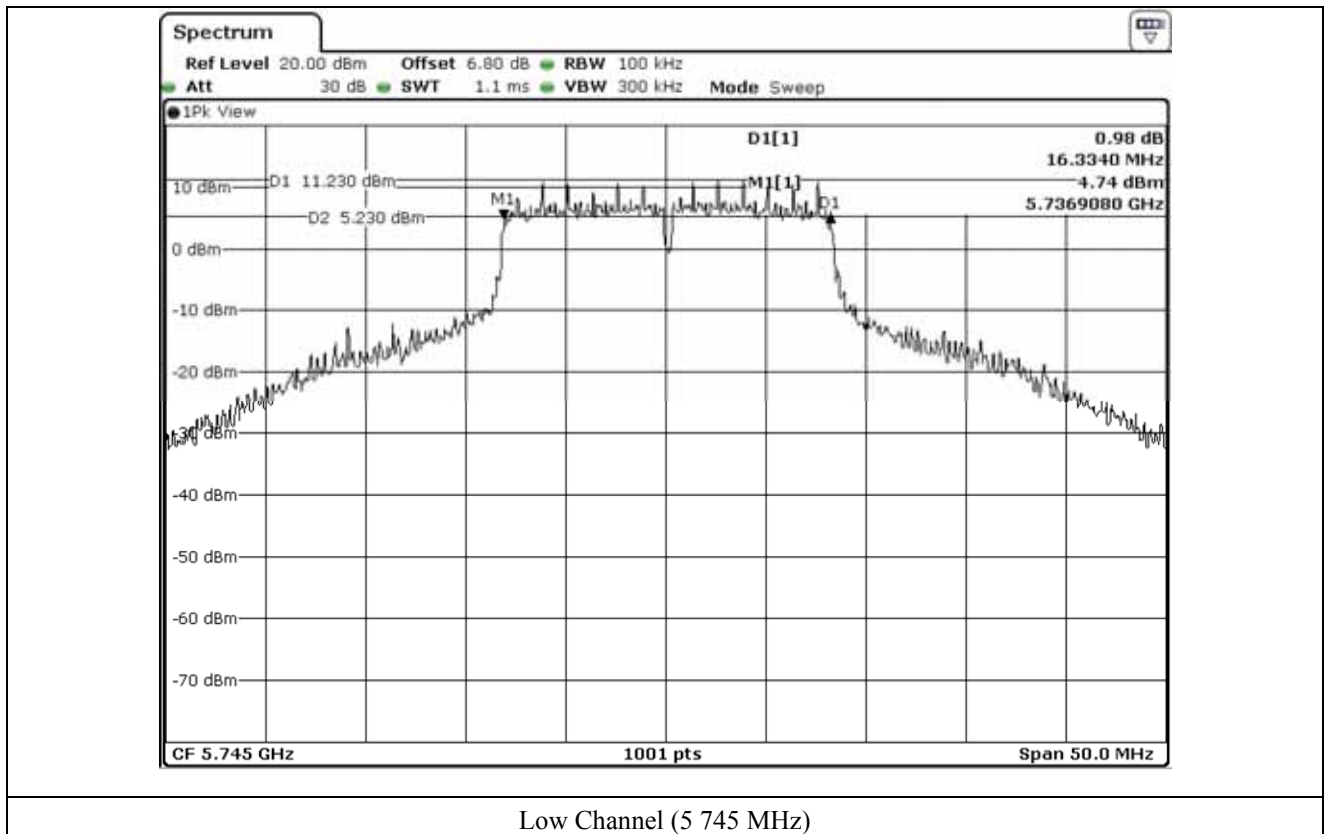

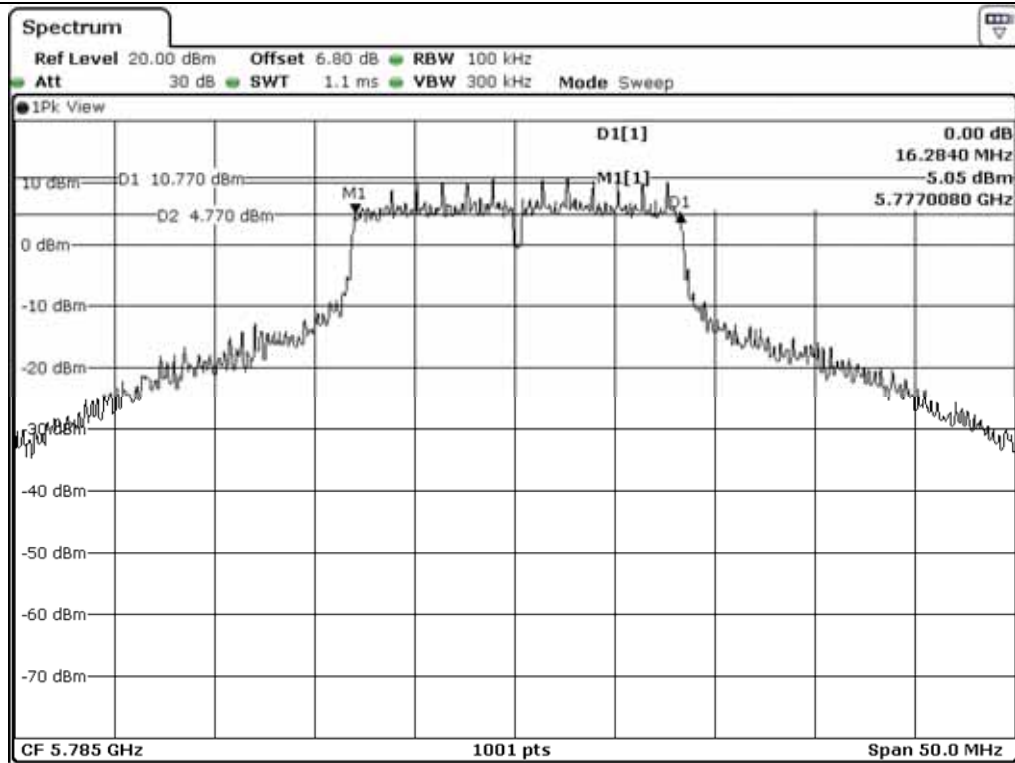

Middle Channel (5 785 MHz)

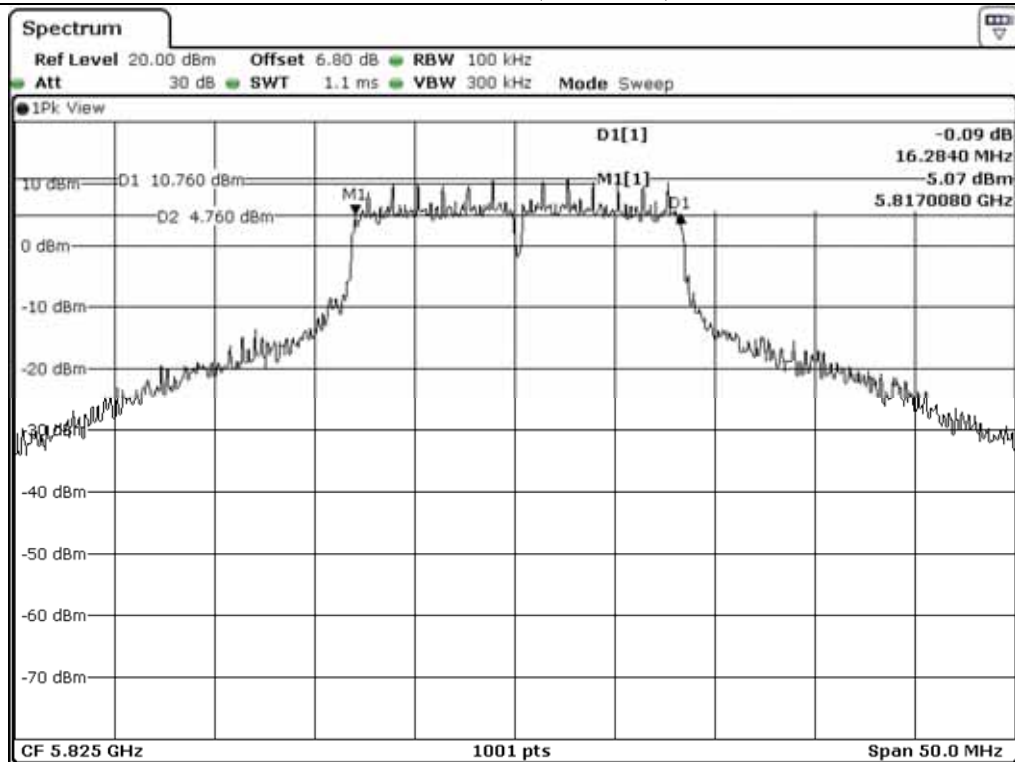

High Channel (5 825 MHz)


8.4.3 Test data for Antenna 2


- Test Date : September 20, 2017 ~ September 27, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.28
	Middle	5 785.00	16.28
	High	5 825.00	16.28




Tested by: Hyung-Kwon, Oh / Assistant Manager

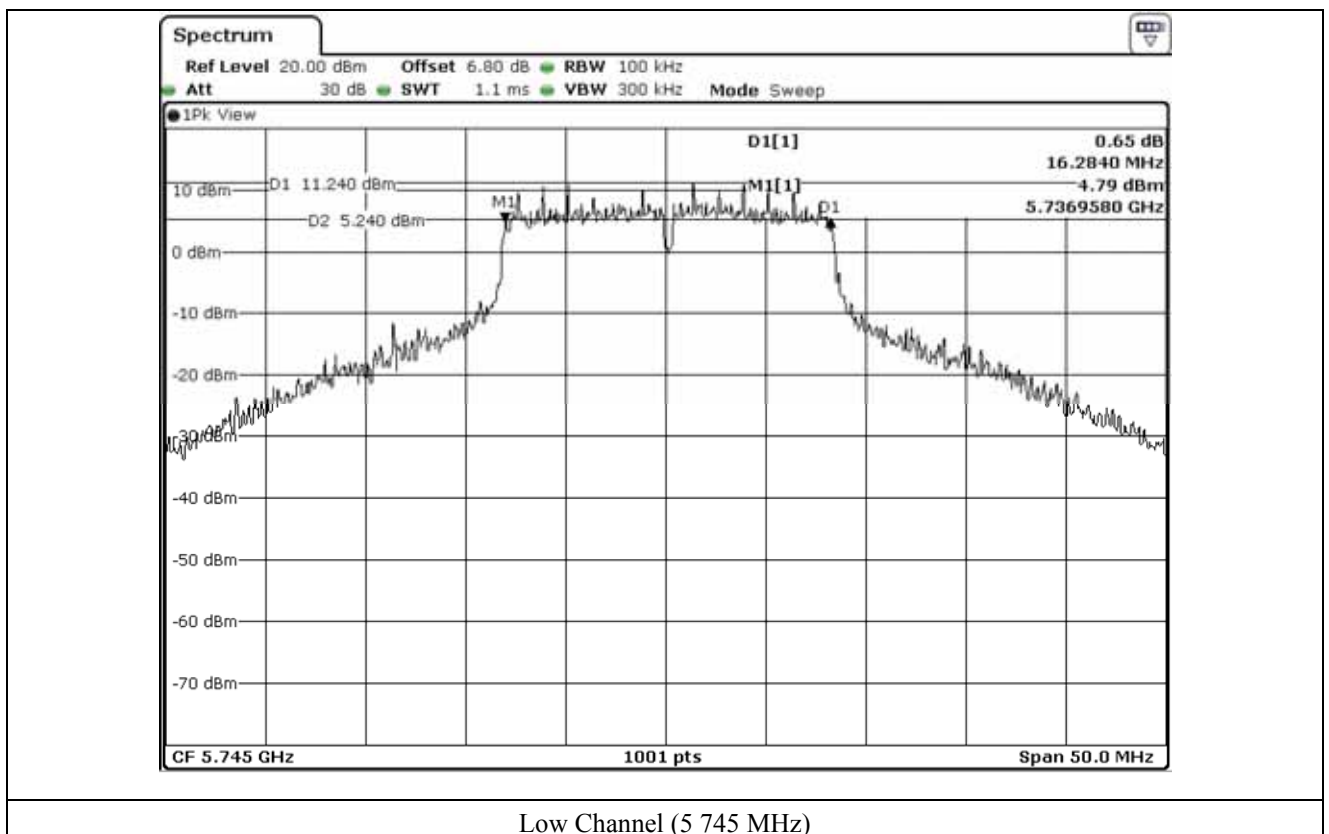

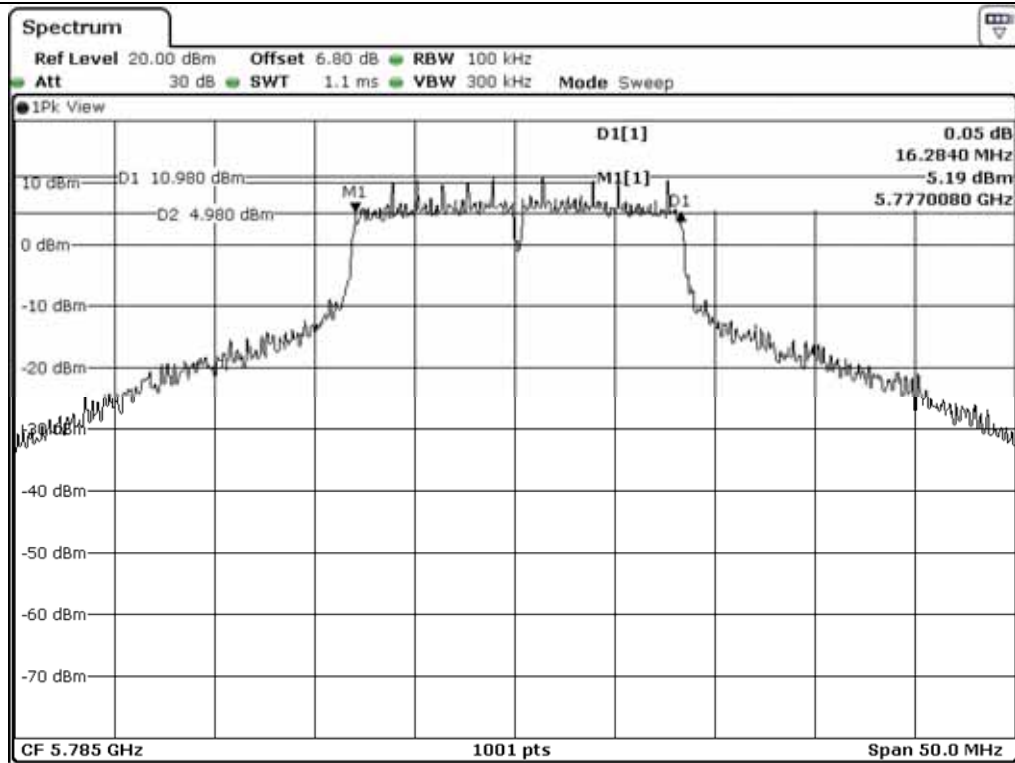

Middle Channel (5.785 MHz)

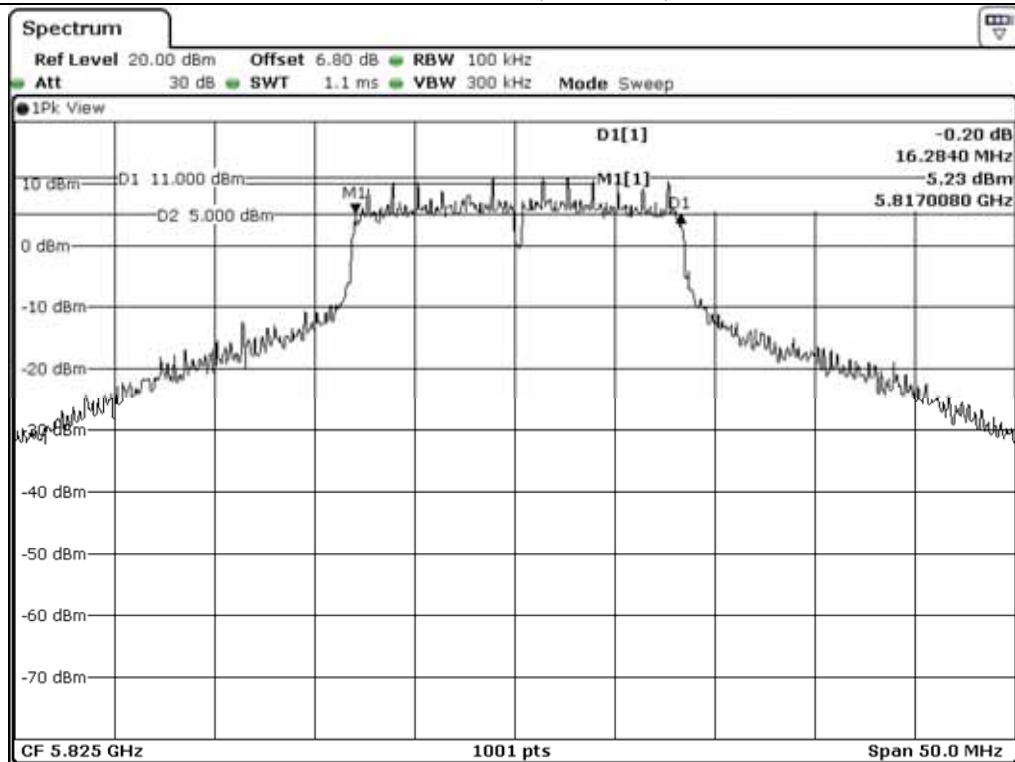


High Channel (5.825 MHz)


8.4.4 Test data for Antenna 3

- Test Date : September 20, 2017 ~ September 27, 2017
- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.33
	Middle	5 785.00	16.28
	High	5 825.00	16.28

Tested by: Hyung-Kwon, Oh / Assistant Manager

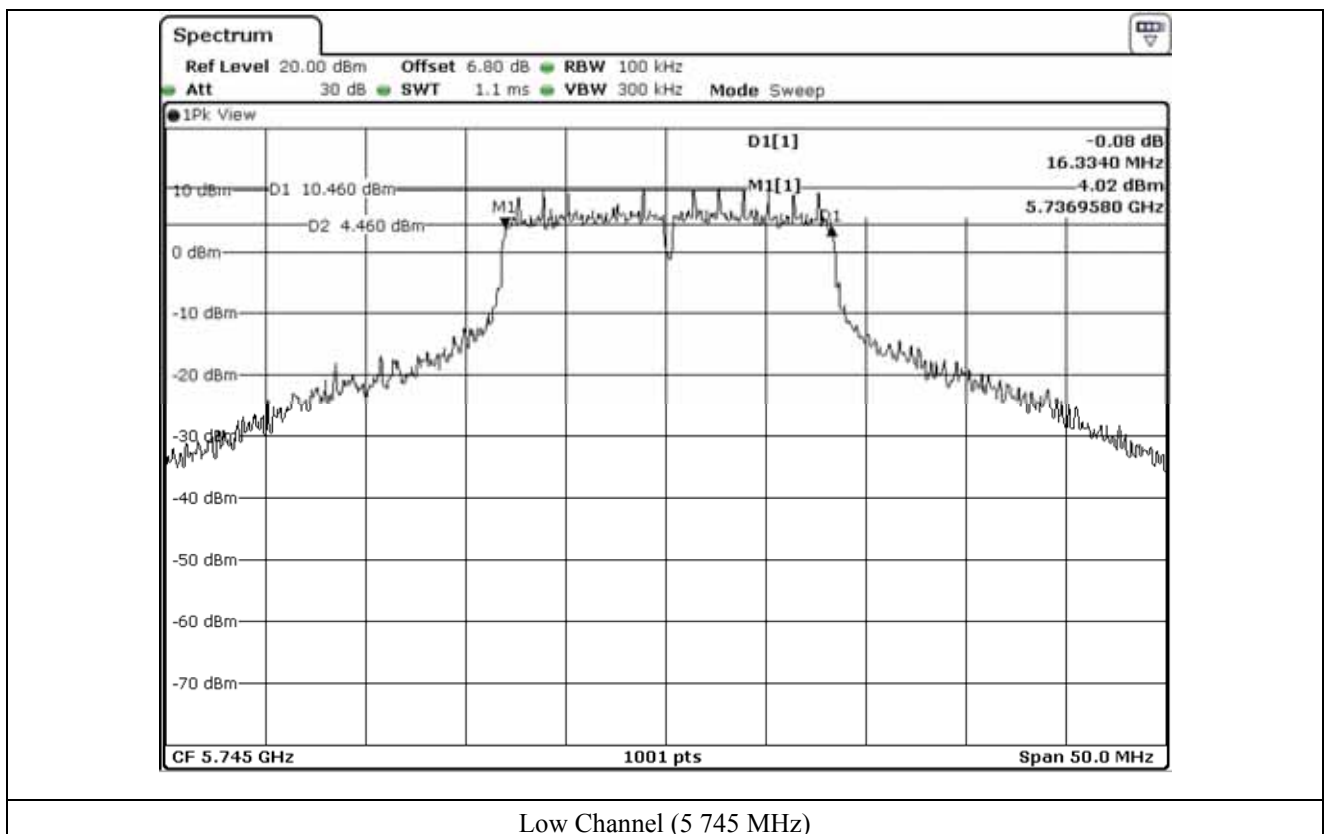

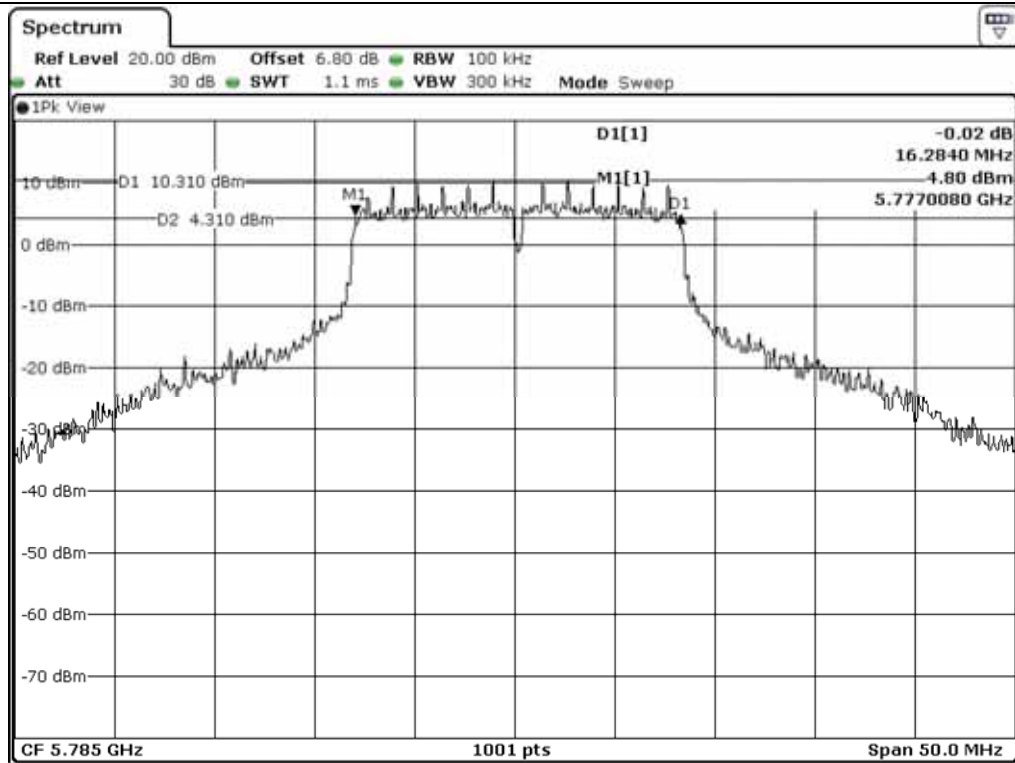

Middle Channel (5.785 MHz)

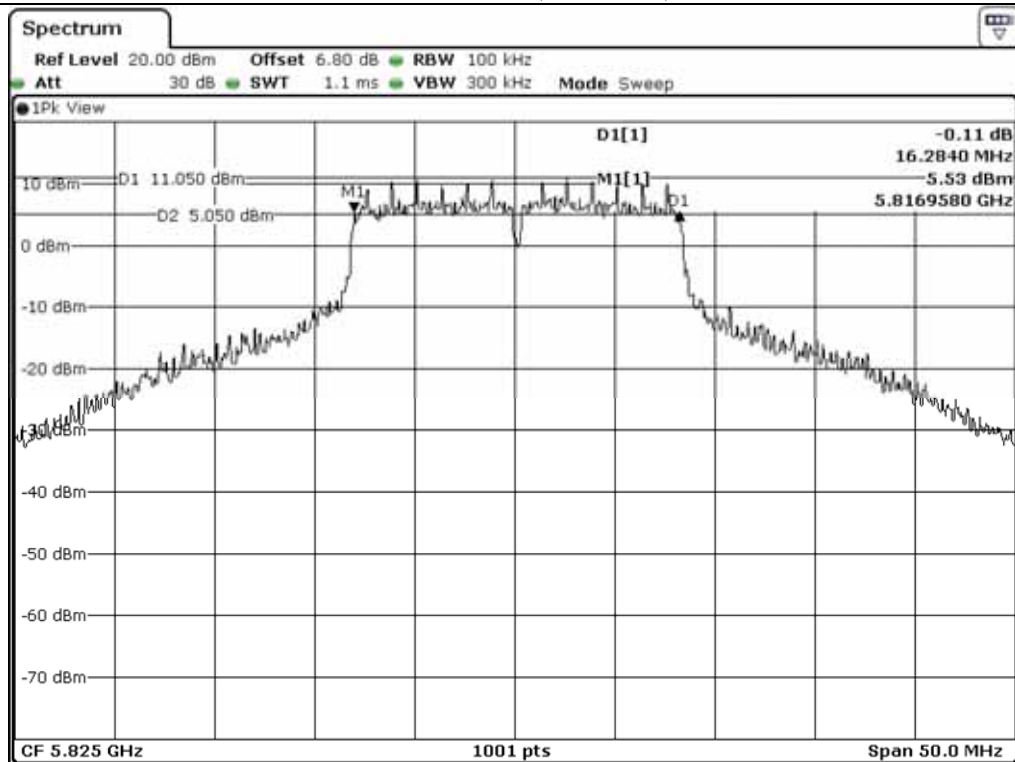

High Channel (5.825 MHz)

8.5 Test data for 802.11n_HT20 RLAN Mode

8.5.1 Test data for Antenna 0


- Test Date : September 20, 2017 ~ September 27, 2017


- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.58
	Middle	5 785.00	17.53
	High	5 825.00	17.58




Tested by: Hyung-Kwon, Oh / Assistant Manager

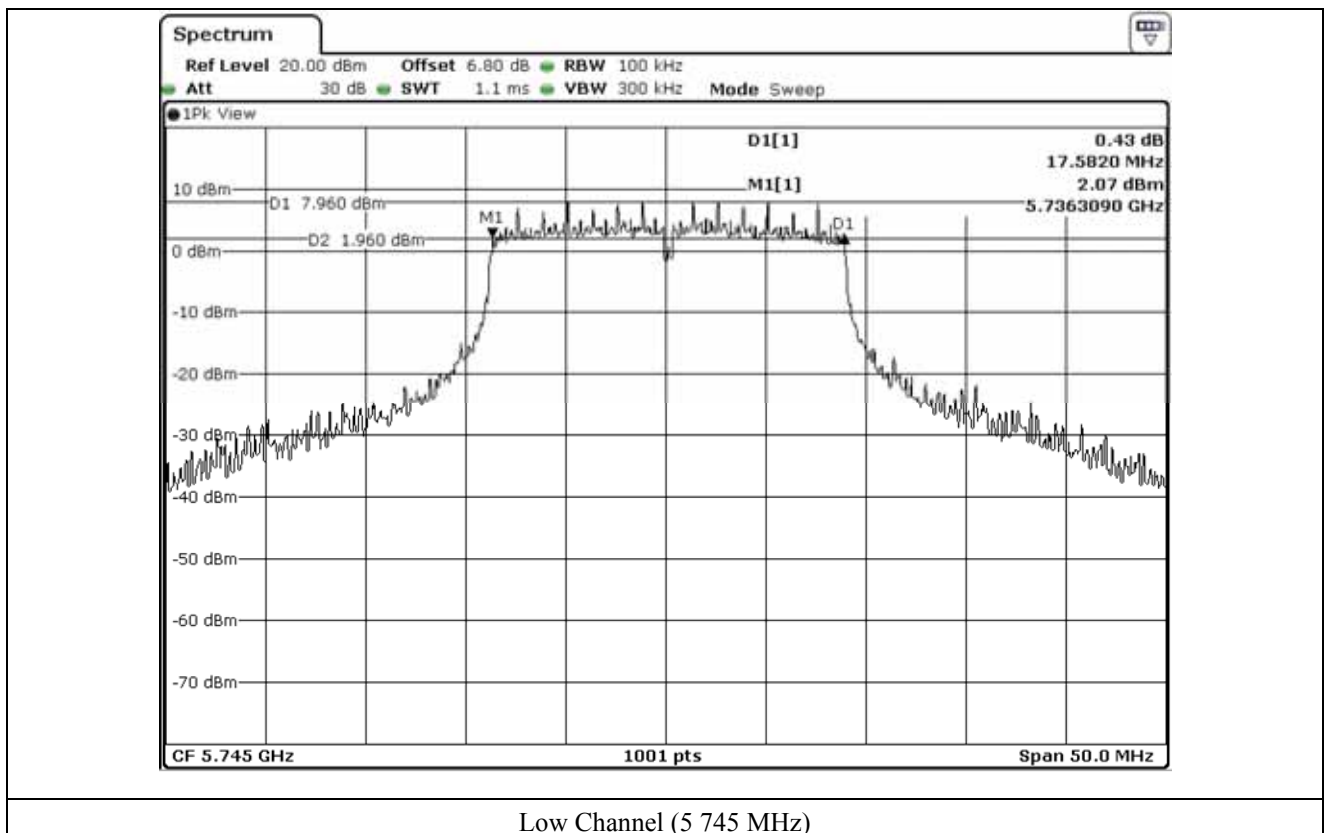

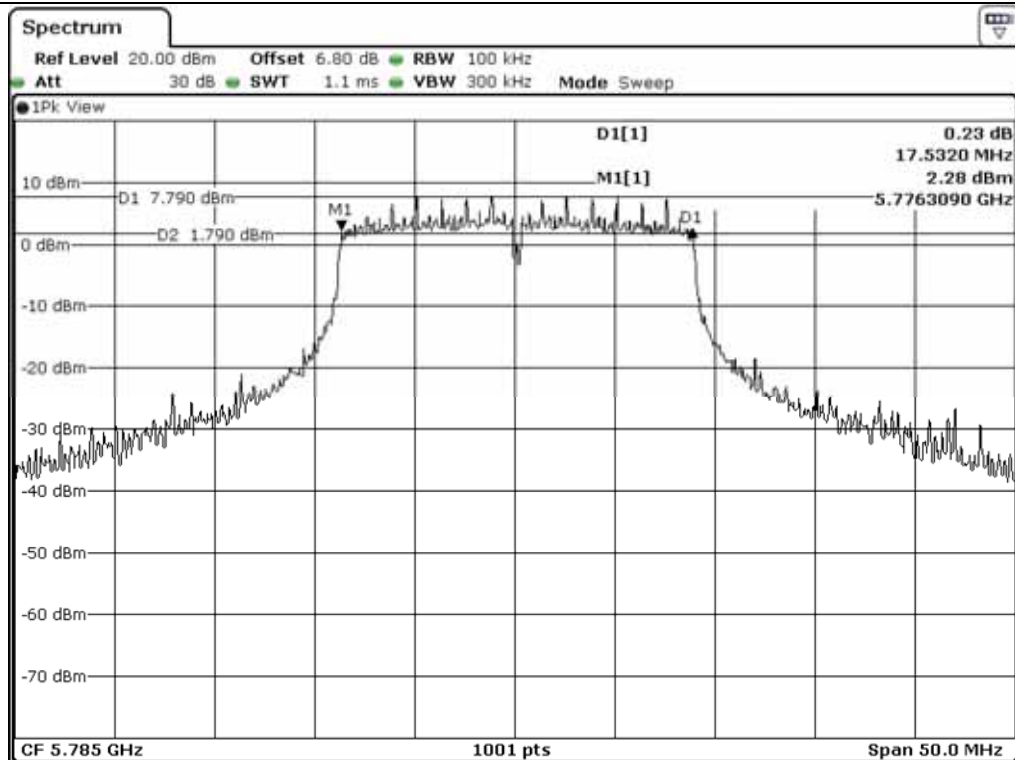

Middle Channel (5 785 MHz)

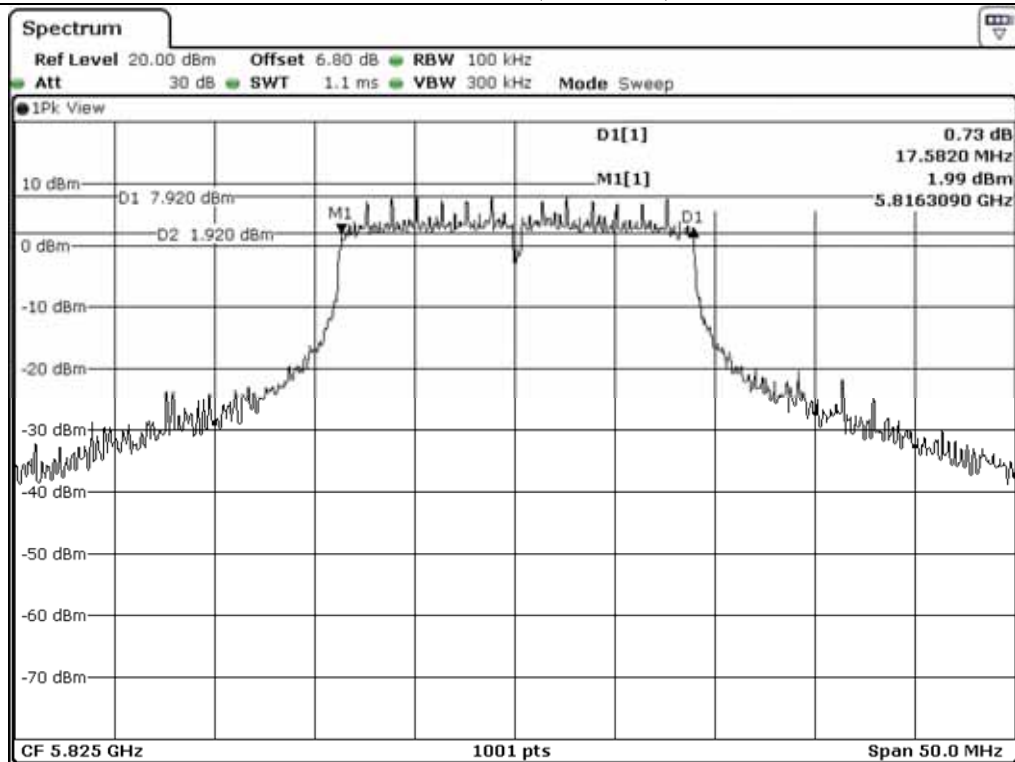


High Channel (5 825 MHz)


8.5.2 Test data for Antenna 1

- Test Date : September 20, 2017 ~ September 27, 2017
 - Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.58
	Middle	5 785.00	17.58
	High	5 825.00	17.53

Tested by: Hyung-Kwon, Oh / Assistant Manager

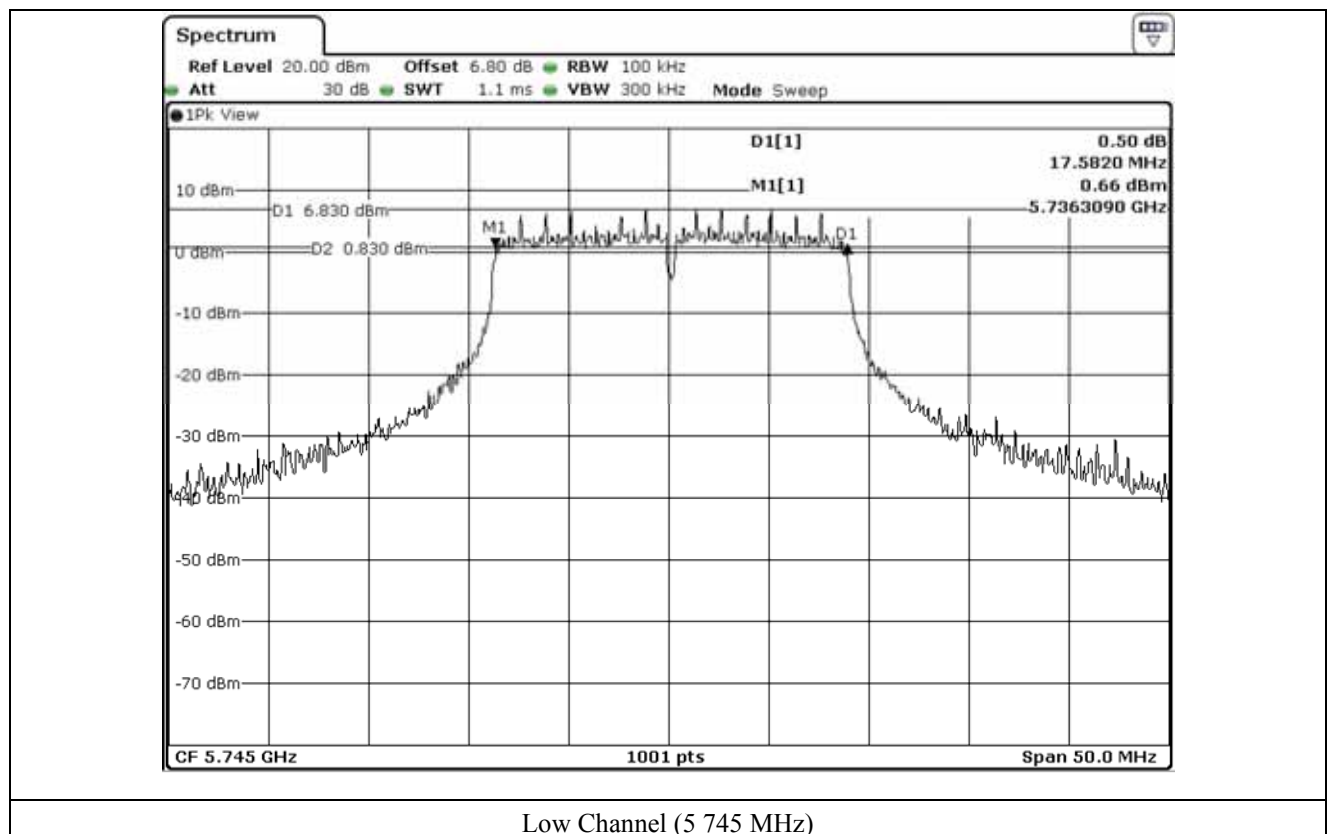

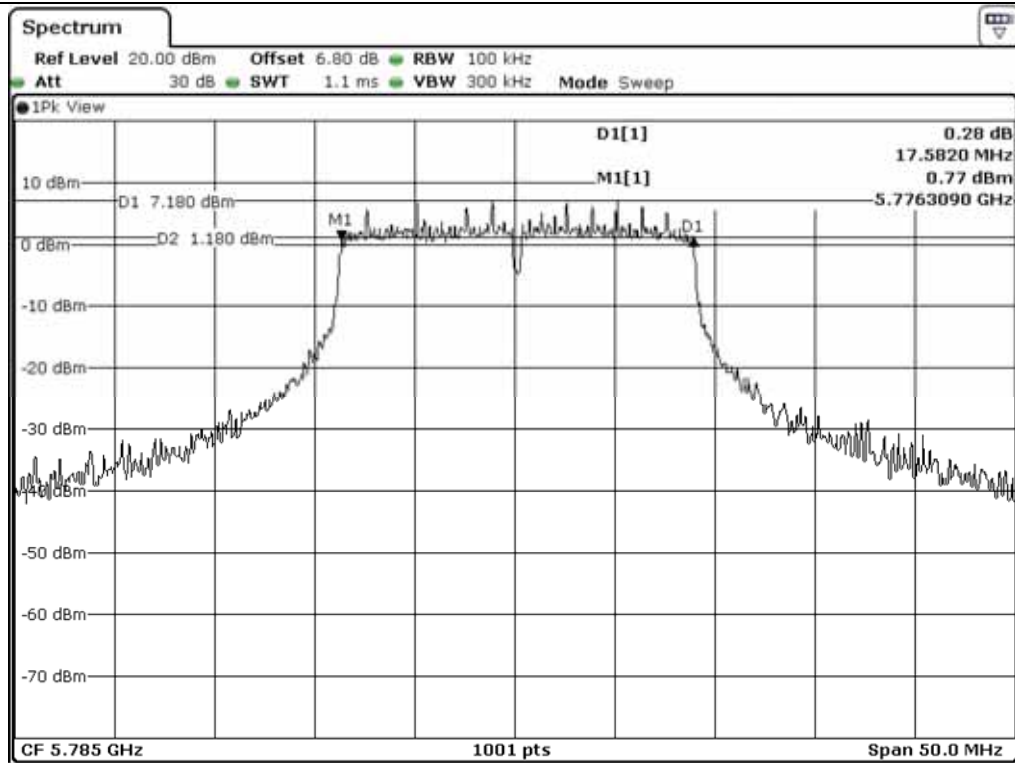

Middle Channel (5.785 MHz)

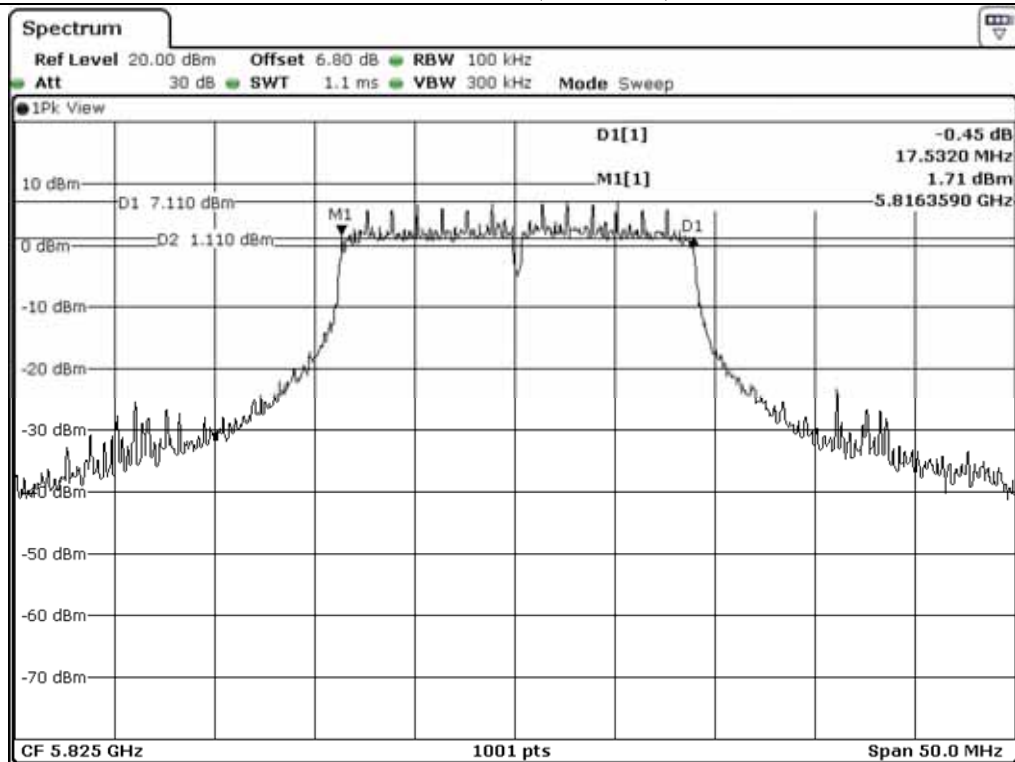

High Channel (5.825 MHz)


8.5.3 Test data for Antenna 2


- Test Date : September 20, 2017 ~ September 27, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.53
	Middle	5 785.00	17.53
	High	5 825.00	17.53




Tested by: Hyung-Kwon, Oh / Assistant Manager

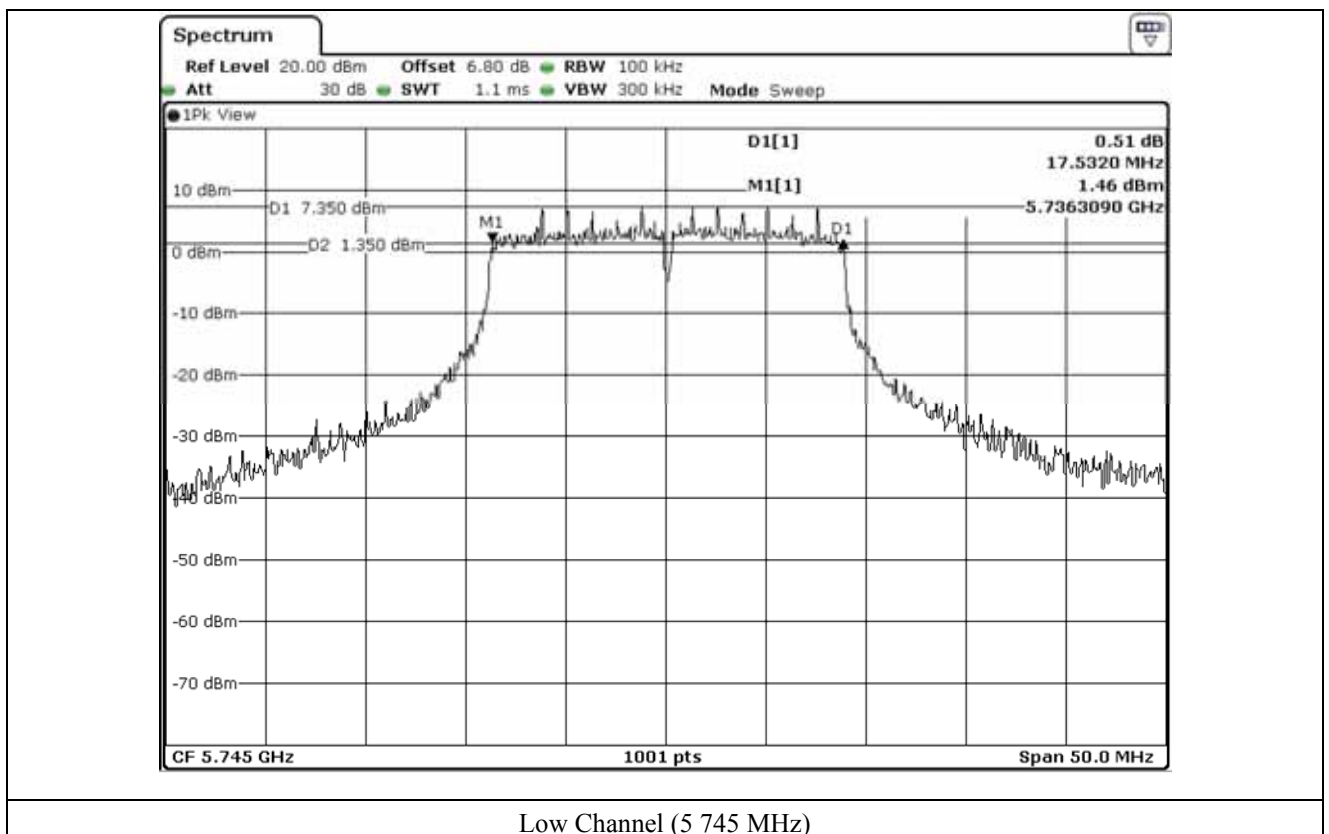

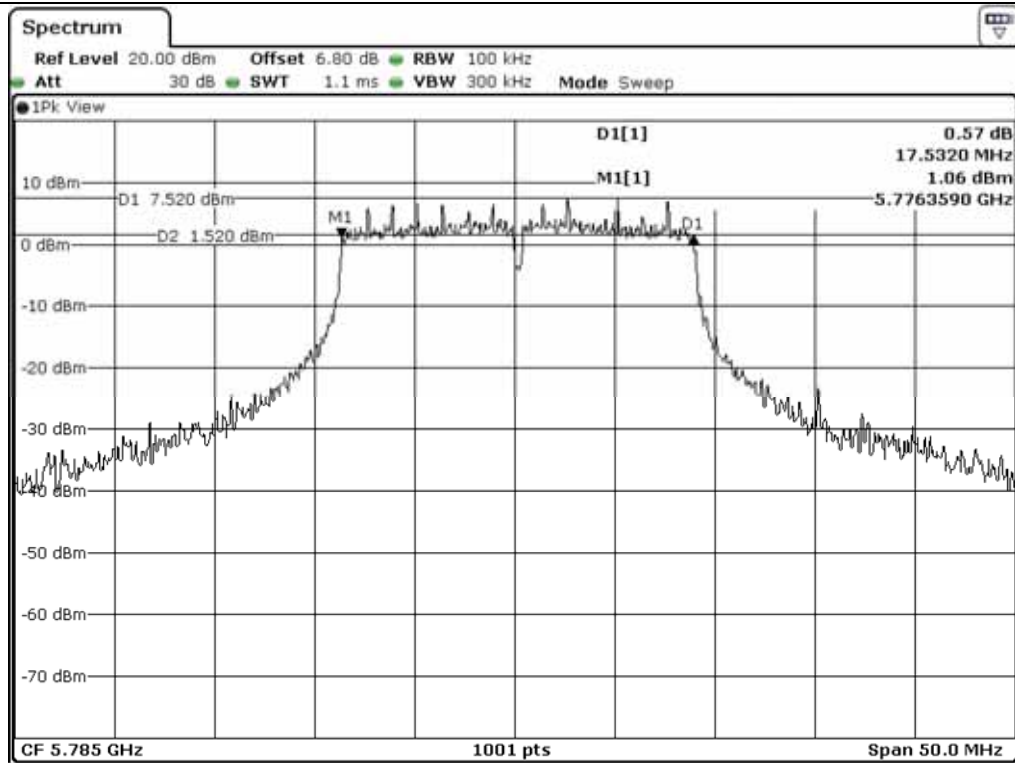

Middle Channel (5.785 MHz)

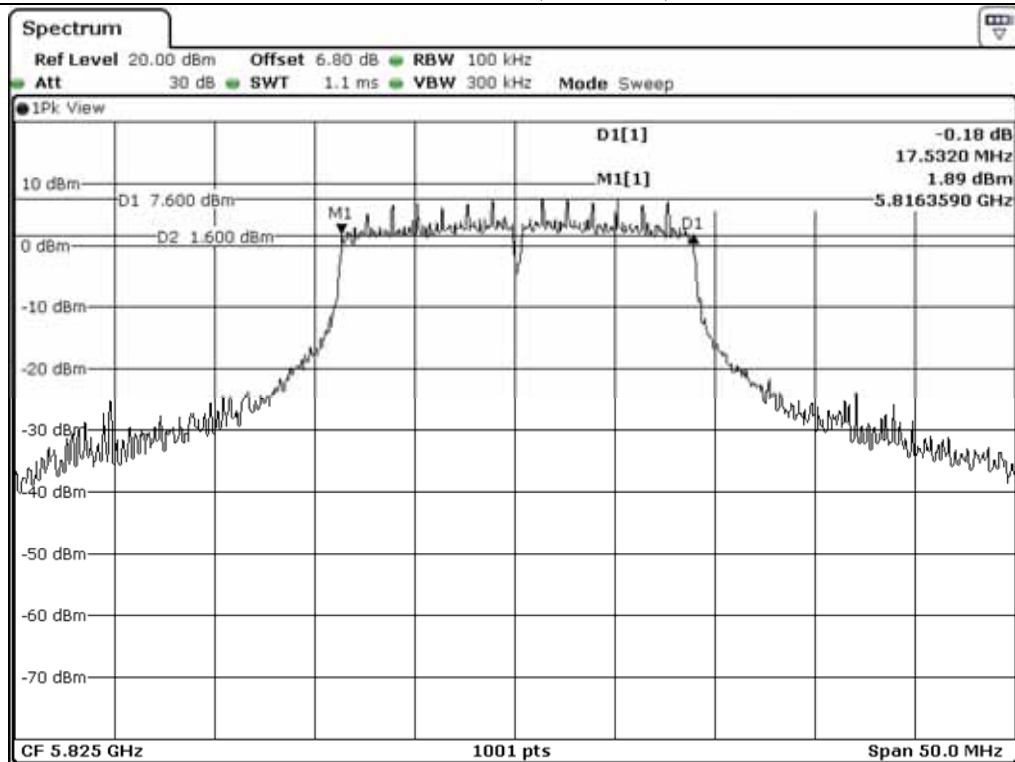


High Channel (5.825 MHz)


8.5.4 Test data for Antenna 3

- Test Date : September 20, 2017 ~ September 27, 2017
- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.53
	Middle	5 785.00	17.53
	High	5 825.00	17.53

Tested by: Hyung-Kwon, Oh / Assistant Manager

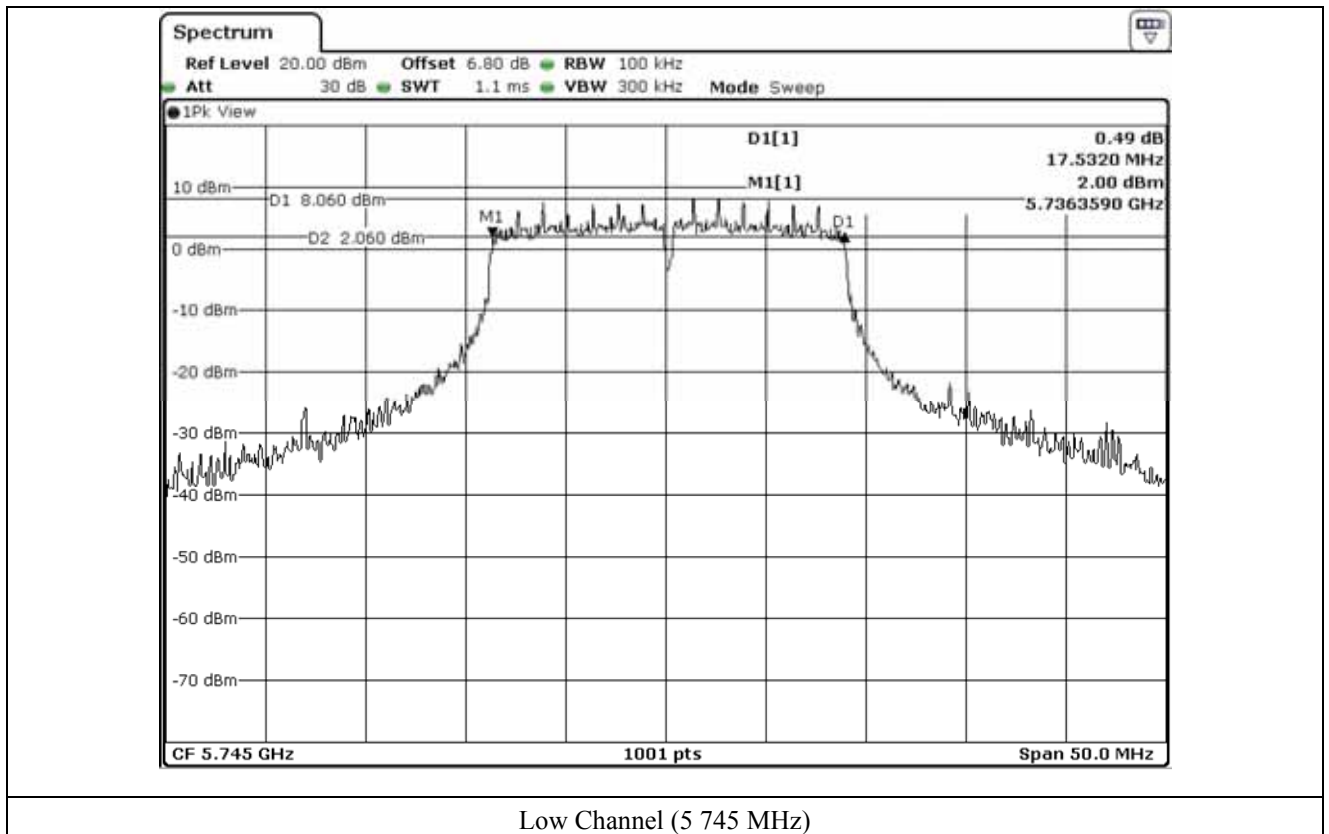

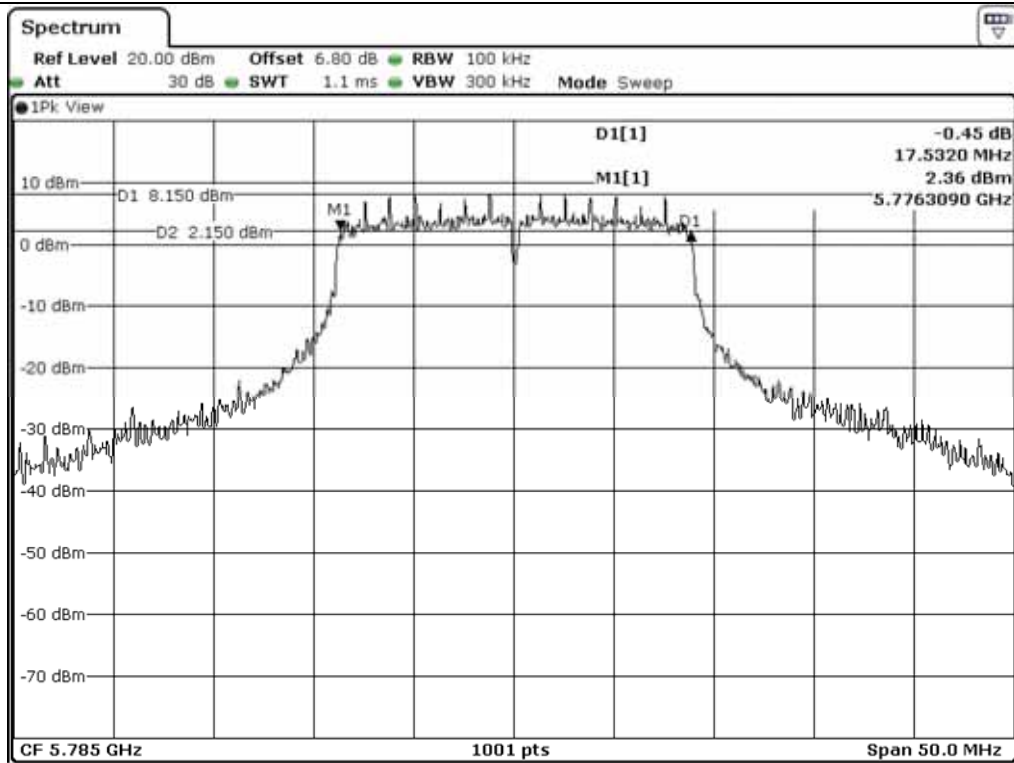

Middle Channel (5.785 MHz)

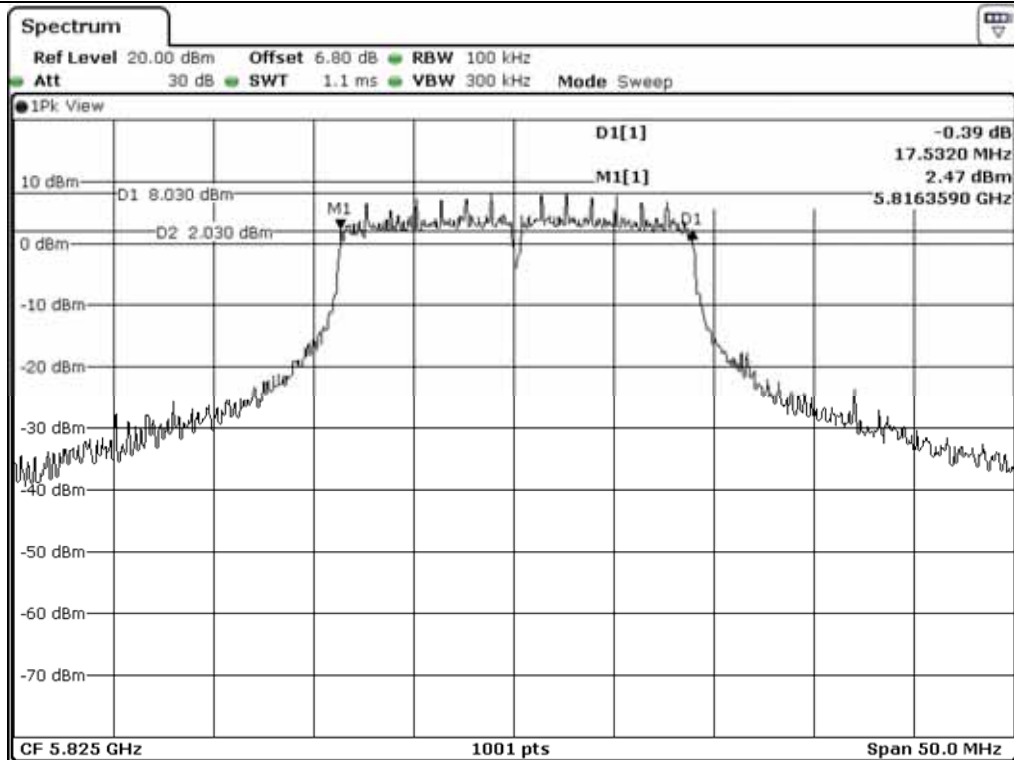

High Channel (5.825 MHz)

8.6 Test data for 802.11n_HT40 RLAN Mode

8.6.1 Test data for Antenna 0

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	35.96
	High	5 795.00	35.46


Remark: See next page for measurement data.



Tested by: Hyung-Kwon, Oh / Assistant Manager

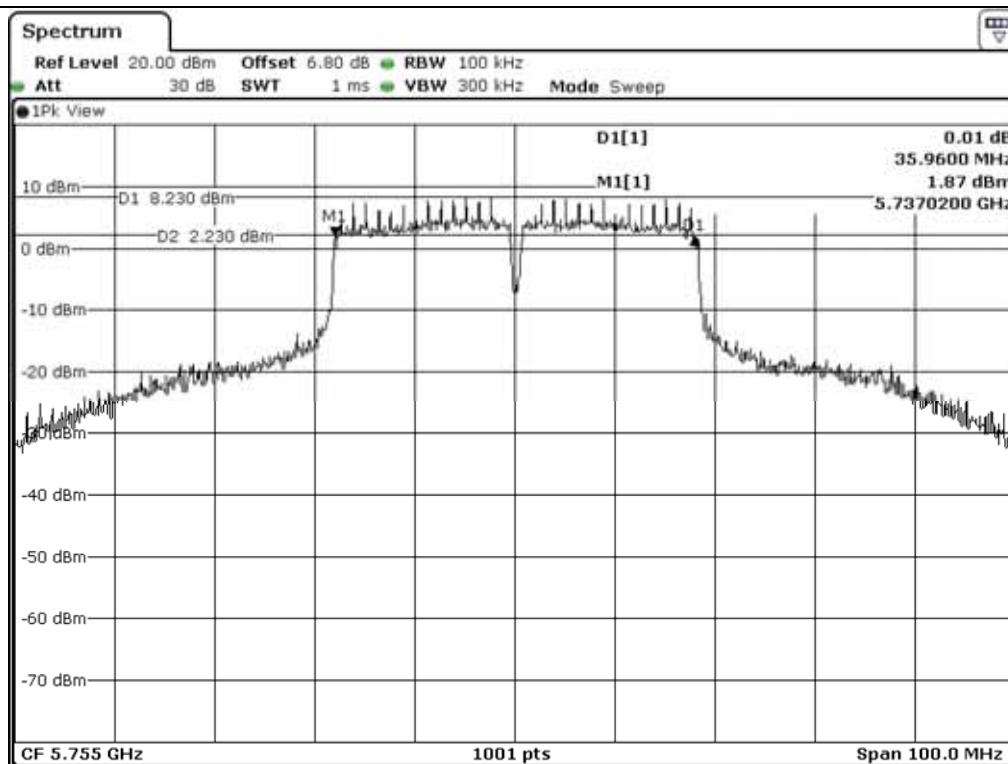

Low Channel (5 755 MHz)

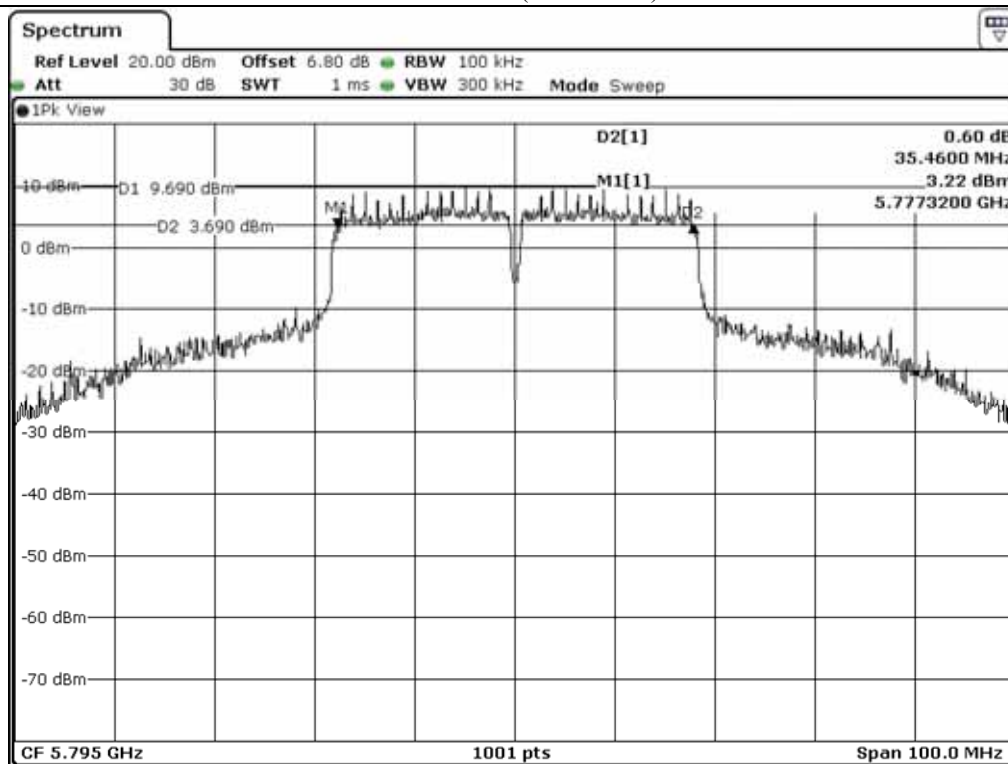

High Channel (5 795 MHz)

8.6.2 Test data for Antenna 1

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	35.56
	High	5 795.00	35.26


Remark: See next page for measurement data.



Tested by: Hyung-Kwon, Oh / Assistant Manager

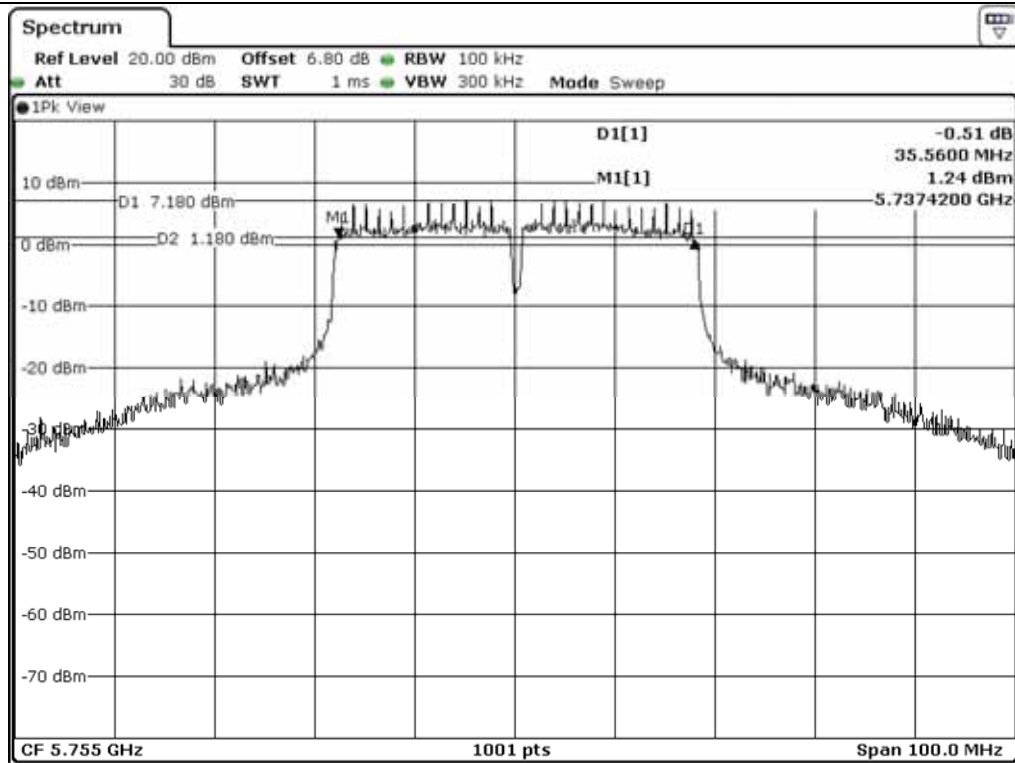

Low Channel (5.755 MHz)

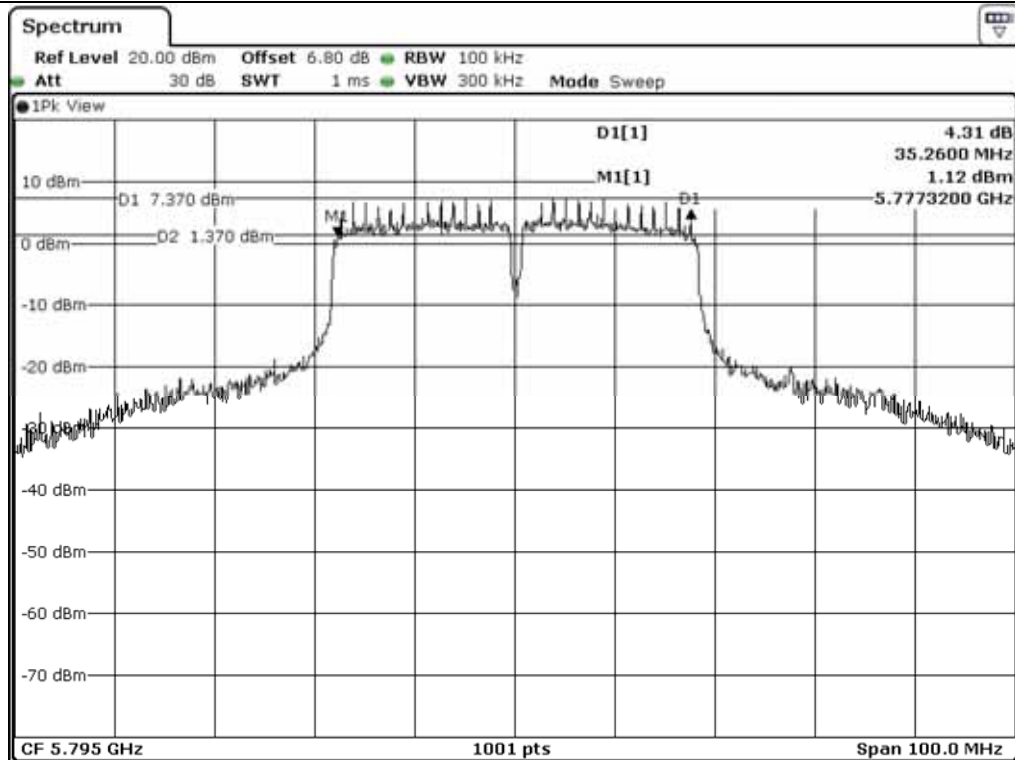

High Channel (5.795 MHz)

8.6.3 Test data for Antenna 2

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	35.46
	High	5 795.00	35.56


Remark: See next page for measurement data.



Tested by: Hyung-Kwon, Oh / Assistant Manager

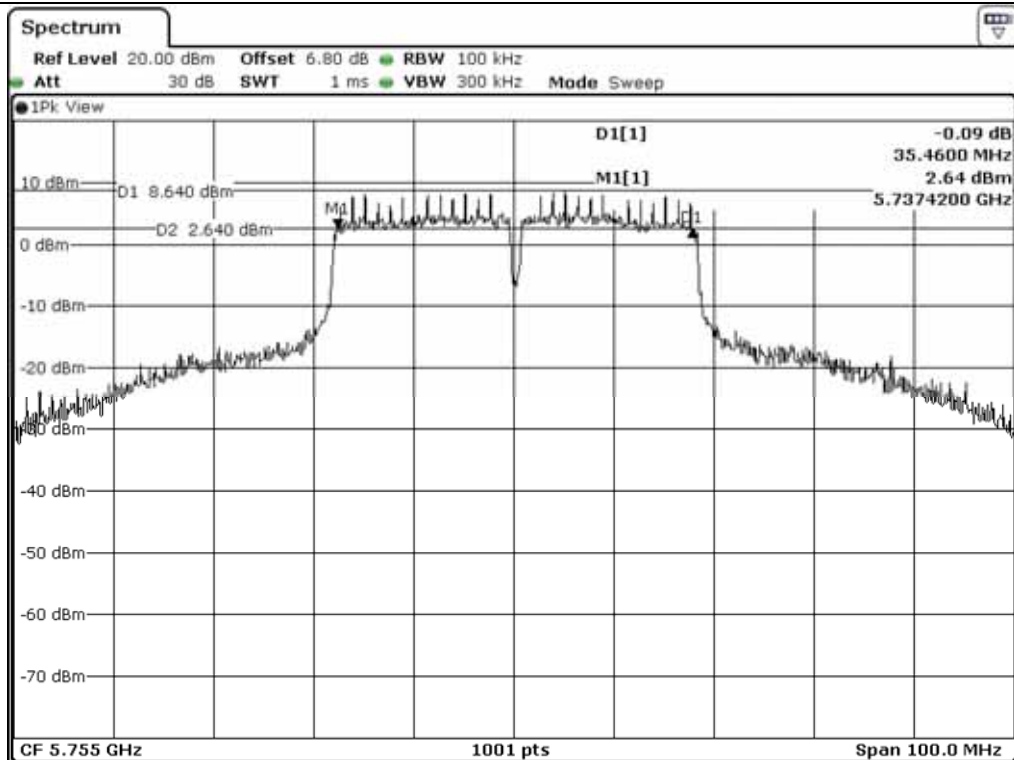

Low Channel (5.755 MHz)

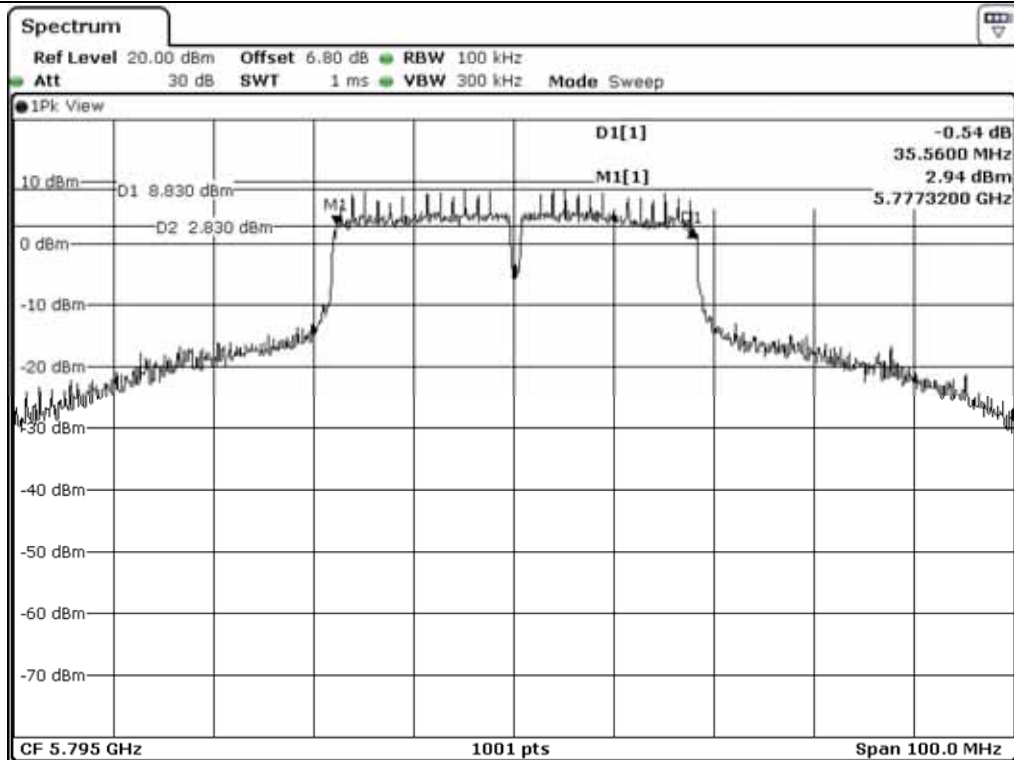

High Channel (5.795 MHz)

8.6.4 Test data for Antenna 3

-. Test Date : September 20, 2017 ~ September 27, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	35.36
	High	5 795.00	35.46


Remark: See next page for measurement data.



Tested by: Hyung-Kwon, Oh / Assistant Manager

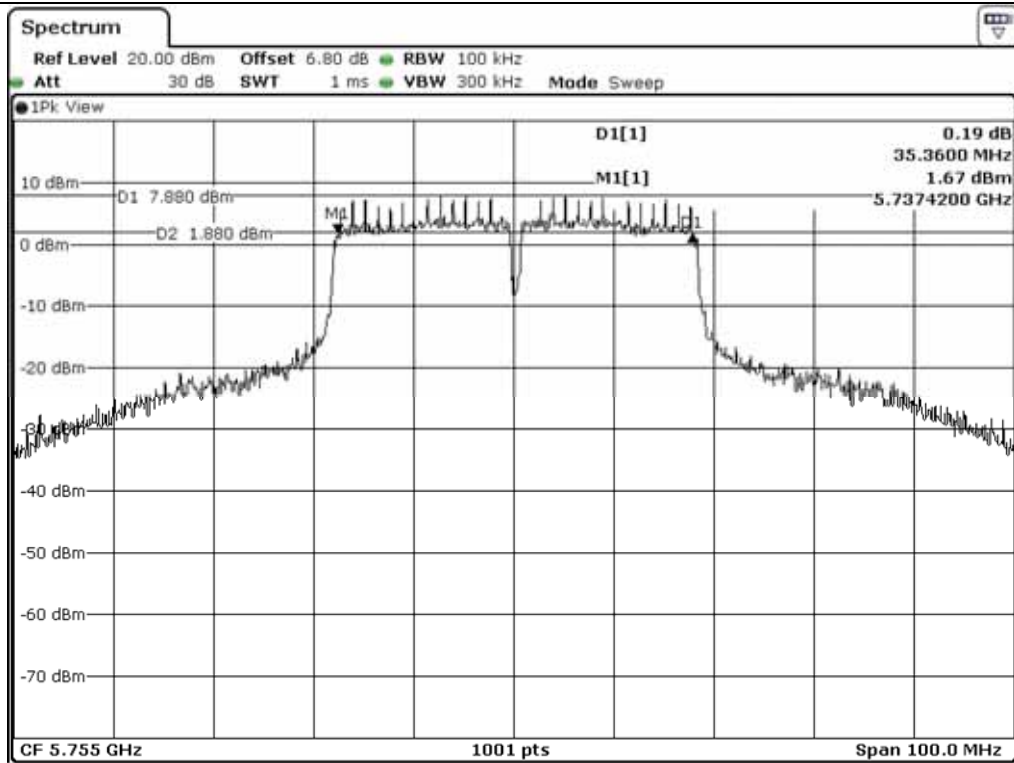

Low Channel (5.755 MHz)

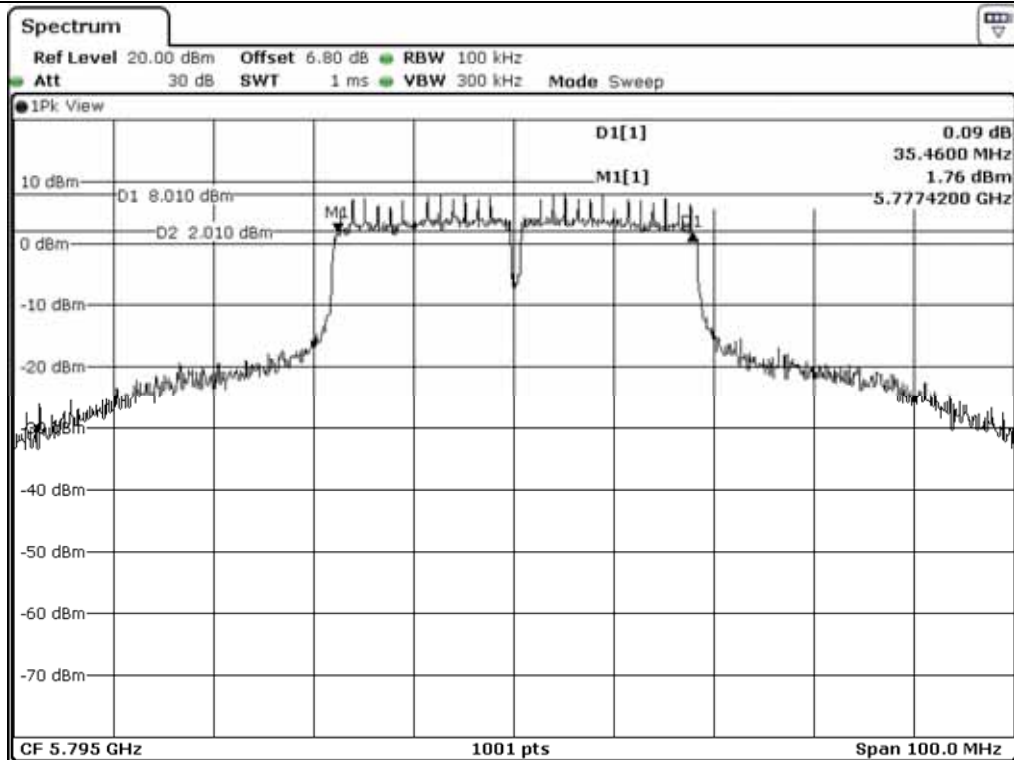


High Channel (5.795 MHz)

8.7.2 Test data for Antenna 1

- Test Date : September 20, 2017 ~ September 27, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775.00	74.93

Tested by: Hyung-Kwon, Oh / Assistant Manager

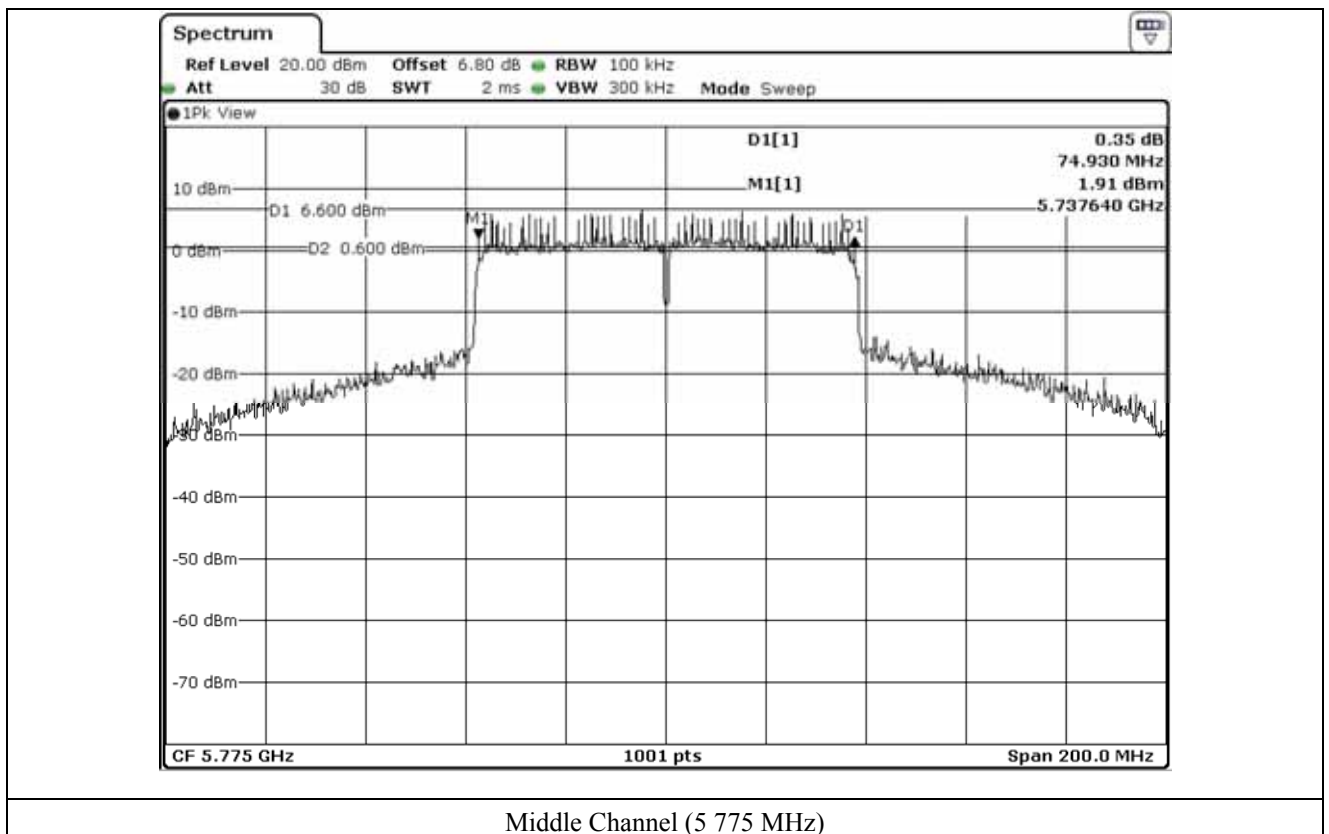


8.7.3 Test data for Antenna 2

- Test Date : September 20, 2017 ~ September 27, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775.00	74.93

Tested by: Hyung-Kwon, Oh / Assistant Manager

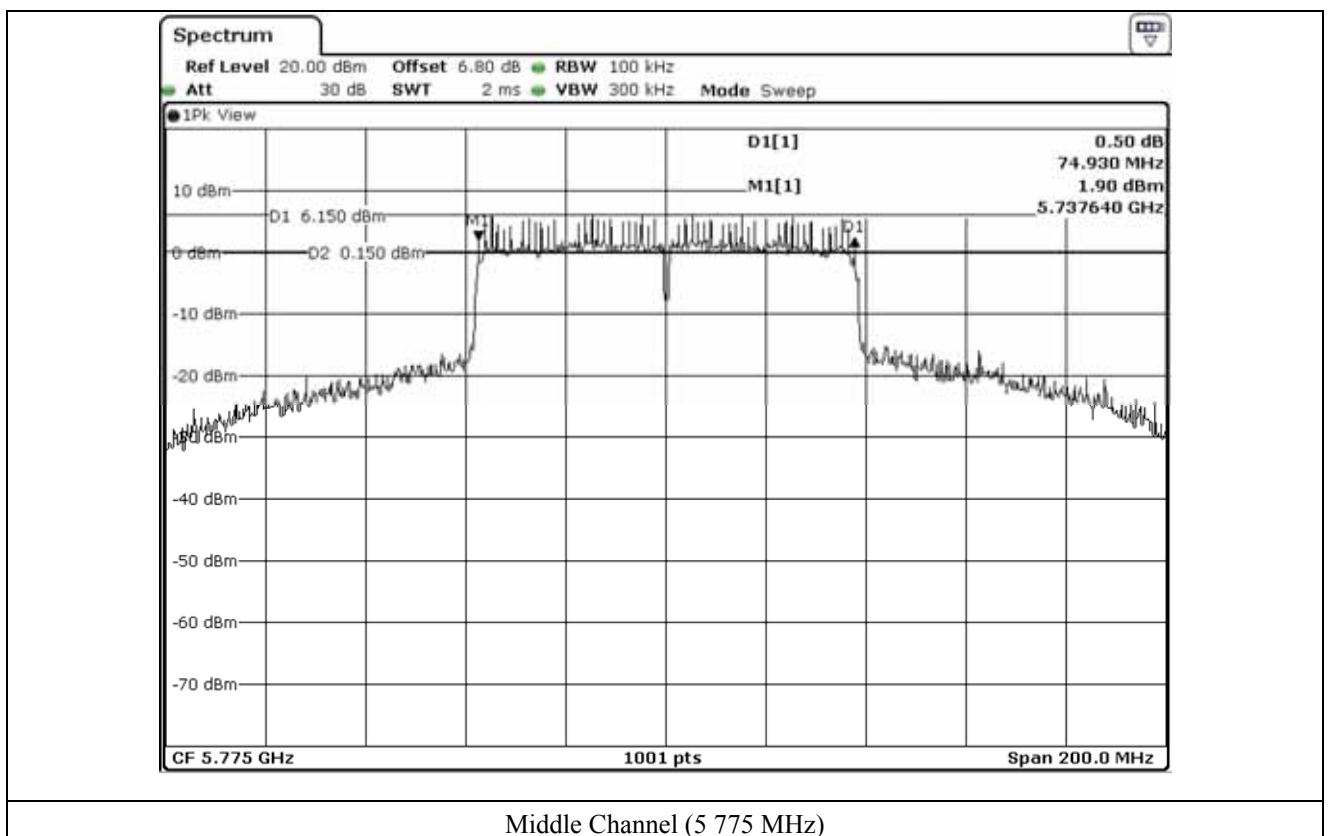

8.7.4 Test data for Antenna 3

- Test Date : September 20, 2017 ~ September 27, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775.00	75.12

Tested by: Hyung-Kwon, Oh / Assistant Manager

