



Handspring Inc. FCC ID: O8FDK

SAM Phantom; Flat Section; Position: (90°,270°)
Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0
1900 MHz Muscle: $\sigma = 1.56$ mho/m $\epsilon_r = 52.0$ $\rho = 1.00$ g/cm³
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7
SAR (1g): 0.336 mW/g, SAR (10g): 0.219 mW/g

Body-worn SAR - Leather Side Case with Belt-Clip Accessory
Front Keypad Side of EUT facing Planar Phantom
Treo 600 Dual-Band GSM/GPRS Phone
Lithium-ion Battery
Fixed Stubby Antenna
PCS GPRS Mode (2 Time Slots)
Channel: 661 [1880.00 MHz]
Conducted Power: 29.99 dBm
Ambient Temp. 25.2°C; Fluid Temp. 23.5°C
Date Tested: June 27, 2003

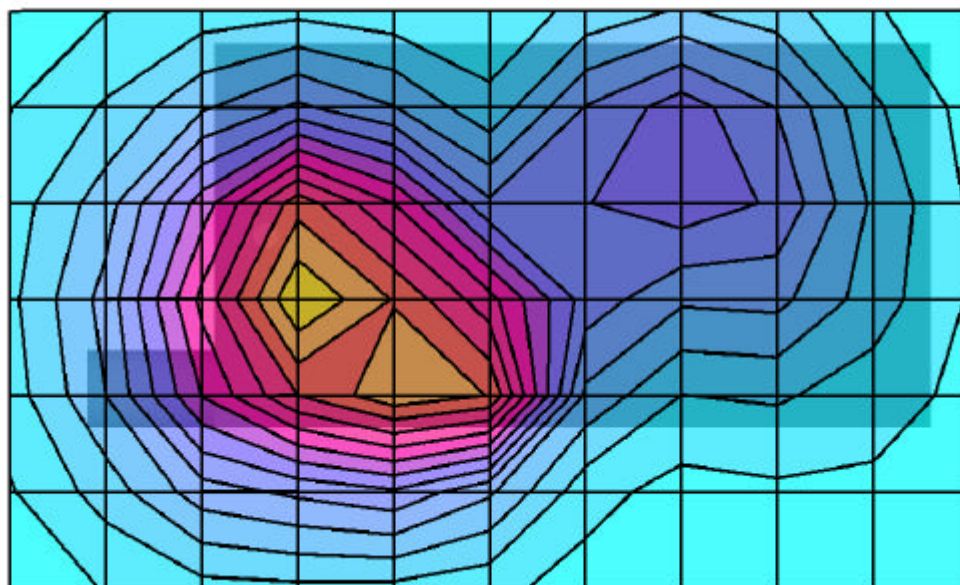

SAR_{Tot} [mW/g]




Handspring Inc. FCC ID: O8FDK

SAM Phantom; Flat Section
Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0
1900 MHz Muscle: $\sigma = 1.56$ mho/m $\epsilon_r = 52.0$ $\rho = 1.00$ g/cm³

Z-Axis Extrapolation at Peak SAR Location

Body-worn SAR - Leather Side Case with Belt-Clip Accessory
Front Keypad Side of EUT facing Planar Phantom
Treo 600 Dual-Band GSM/GPRS Phone
Lithium-ion Battery
Fixed Stubby Antenna
PCS GPRS Mode (2 Time Slots)
Channel: 661 [1880.00 MHz]
Conducted Power: 29.99 dBm
Ambient Temp. 25.2°C; Fluid Temp. 23.5°C
Date Tested: June 27, 2003

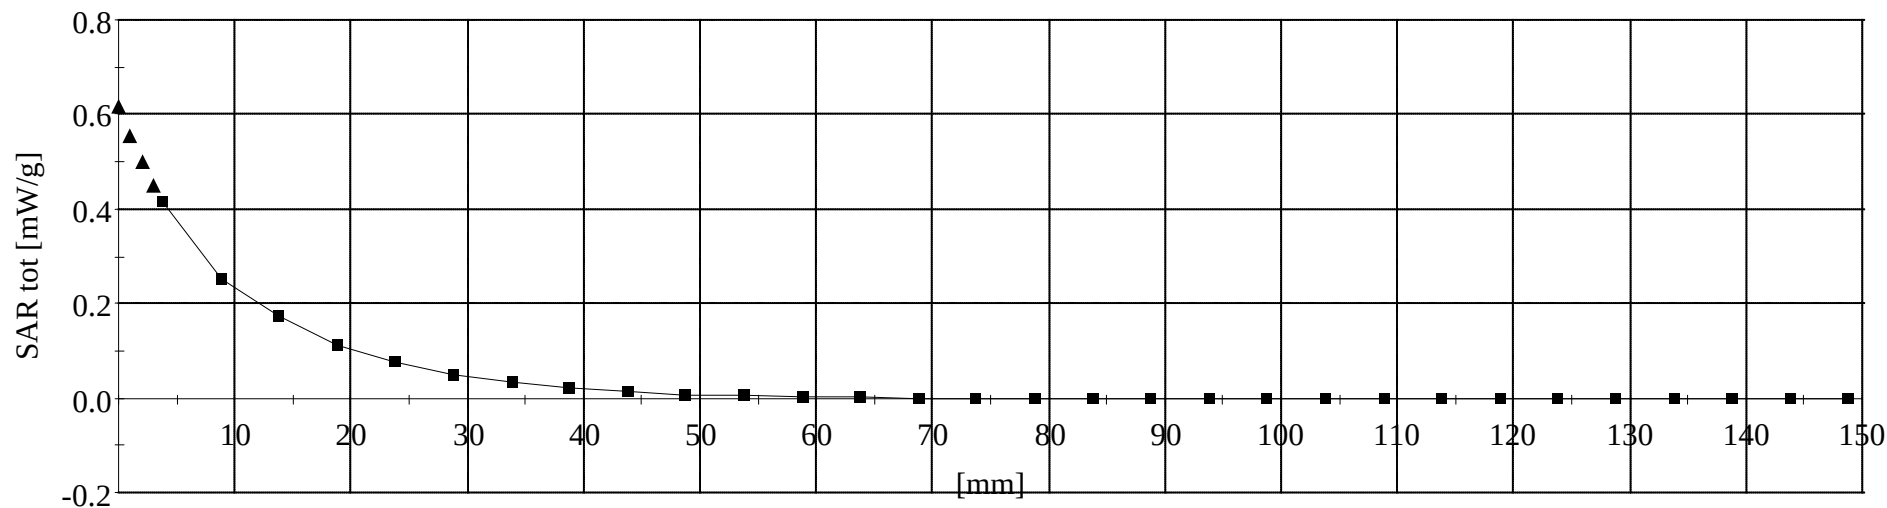

Handspring Inc. FCC ID: O8FDK

SAM Phantom; Flat Section; Position: (270°,90°)
Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0
1900 MHz Muscle: $\sigma = 1.56$ mho/m $\epsilon_r = 52.0$ $\rho = 1.00$ g/cm³

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Cube 5x5x7

SAR (1g): 0.0858 mW/g, SAR (10g): 0.0495 mW/g

Body-worn SAR - Fitted Leather Case with Removable Belt-Clip & Ear-Microphone

Back Side of EUT facing Planar Phantom

Treo 600 Dual-Band GSM/GPRS Phone

Lithium-ion Battery

Fixed Stubby Antenna


PCS GPRS Mode (2 Time Slots)

Channel: 661 [1880.00 MHz]


Conducted Power: 29.97 dBm

Ambient Temp. 25.2°C; Fluid Temp. 23.5°C

Date Tested: June 27, 2003

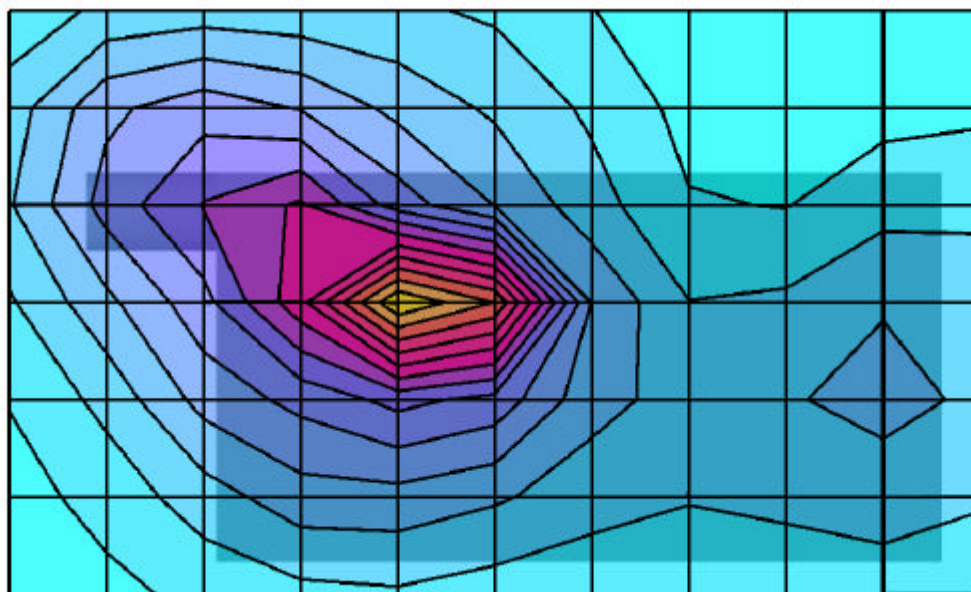

SAR_{Tot} [mW/g]

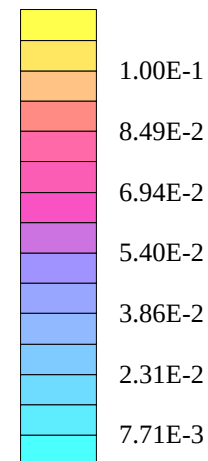

Handspring Inc. FCC ID: O8FDK

SAM Phantom; Flat Section; Position: (90°,270°)
 Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0
 1900 MHz Muscle: $\sigma = 1.56$ mho/m $\epsilon_r = 52.0$ $\rho = 1.00$ g/cm³

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Cube 5x5x7

SAR (1g): 0.296 mW/g, SAR (10g): 0.191 mW/g

Body-worn SAR - Front Keypad Side of EUT with Ear-Microphone Accessory

1.0 cm Air Spacing between Front Side of EUT and Planar Phantom

Treo 600 Dual-Band GSM/GPRS Phone

Lithium-ion Battery

Fixed Stubby Antenna


PCS GPRS Mode (2 Time Slots)

Channel: 661 [1880.00 MHz]


Conducted Power: 30.03 dBm

Ambient Temp. 25.2°C; Fluid Temp. 23.5°C

Date Tested: June 27, 2003

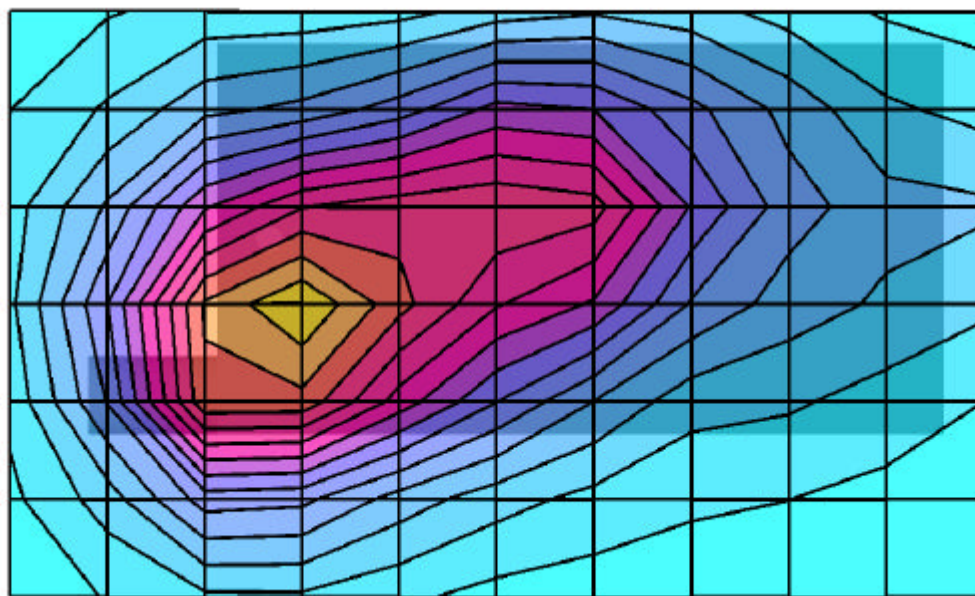


SAR_{Tot} [mW/g]

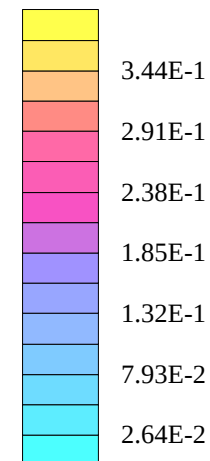

Handspring Inc. FCC ID: O8FDK

SAM Phantom; Flat Section; Position: (270°,90°)
Probe: ET3DV6 - SN1387; ConvF(4.90,4.90,4.90); Crest factor: 4.0
1900 MHz Muscle: $\sigma = 1.56$ mho/m $\epsilon_r = 52.0$ $\rho = 1.00$ g/cm³
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7
SAR (1g): 0.315 mW/g, SAR (10g): 0.182 mW/g

Body-worn SAR - Back Side of EUT with Ear-Microphone Accessory
1.0 cm Air Spacing between Back Side of EUT and Planar Phantom
Treo 600 Dual-Band GSM/GPRS Phone
Lithium-ion Battery
Fixed Stubby Antenna
PCS GPRS Mode (2 Time Slots)
Channel: 661 [1880.00 MHz]
Conducted Power: 29.98 dBm
Ambient Temp. 25.2°C; Fluid Temp. 23.5°C
Date Tested: June 27, 2003

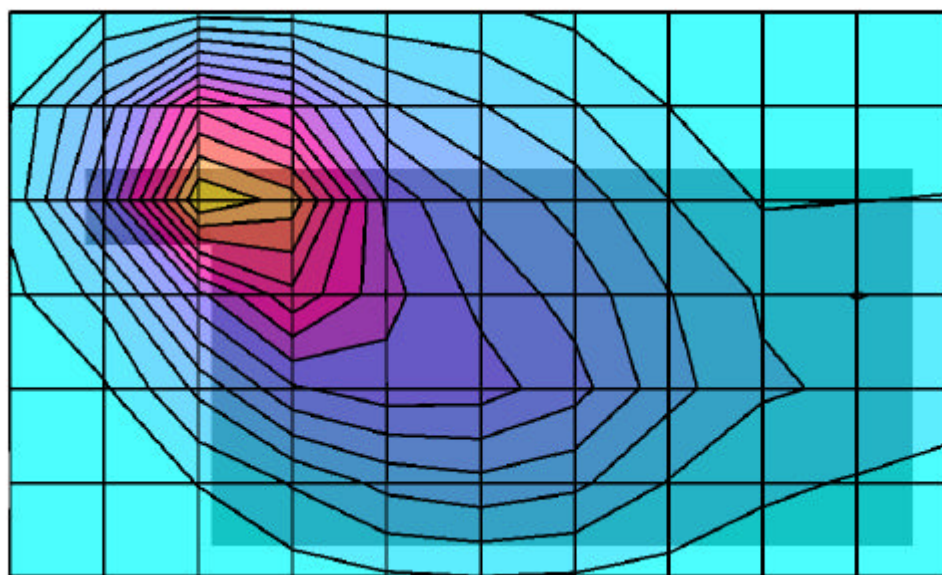

SAR_{Tot} [mW/g]

