

# FCC Report

Product Name : TLSR8258MRC32D  
Trade mark : N/A  
Model No. : TLSR8258MRC32D  
FCC ID : OEOTLSR8258MRC32D  
Report Number : BLA-EMC-201904-A53-01  
Date of sample receipt : April 23, 2019  
Date of Test : April 23, 2019–April 28, 2019  
Date of Issue : April 30, 2019  
Test standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247  
Test result : PASS

Prepared for:

**Telink Semiconductor (Shanghai) Co., Ltd.**  
**Bldg 3, No.1500, Zuchongzhi Rd, Zhangjiang Hi-Tech Park, Shanghai**  
**201203, China**

Prepared by:

**Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.**  
**IOT Test Centre of BlueAsia**  
**No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,**  
**China**  
**TEL: +86-755-28682673**  
**FAX: +86-755-28682673**

Compiled by:

*Bason*

Review by:

*Sweet . liang*

Approved by:

*Emen - li*

Date: April 30, 2019



## 2 Version

| Version No. | Date           | Description |
|-------------|----------------|-------------|
| 00          | April 30, 2019 | Original    |
|             |                |             |
|             |                |             |
|             |                |             |
|             |                |             |

BlueAsia

### 3 Contents

|                                           | Page |
|-------------------------------------------|------|
| 1 COVER PAGE .....                        | 1    |
| 2 VERSION .....                           | 2    |
| 3 CONTENTS .....                          | 3    |
| 4 TEST SUMMARY .....                      | 4    |
| 5 GENERAL INFORMATION .....               | 5    |
| 5.1 GENERAL DESCRIPTION OF EUT .....      | 5    |
| 5.2 TEST MODE .....                       | 7    |
| 5.3 DESCRIPTION OF SUPPORT UNITS .....    | 7    |
| 5.4 TEST FACILITY .....                   | 7    |
| 5.5 TEST LOCATION .....                   | 7    |
| 6 TEST INSTRUMENTS LIST .....             | 8    |
| 7 TEST RESULTS AND MEASUREMENT DATA ..... | 10   |
| 7.1 ANTENNA REQUIREMENT .....             | 10   |
| 7.2 CONDUCTED EMISSIONS .....             | 11   |
| 7.3 CONDUCTED OUTPUT POWER .....          | 12   |
| 7.4 CHANNEL BANDWIDTH .....               | 14   |
| 7.5 POWER SPECTRAL DENSITY .....          | 16   |
| 7.6 BAND EDGES .....                      | 18   |
| 7.6.1 Conducted Emission Method .....     | 18   |
| 7.6.2 Radiated Emission Method .....      | 19   |
| 7.7 SPURIOUS EMISSION .....               | 21   |
| 7.7.1 Conducted Emission Method .....     | 21   |
| 7.7.2 Radiated Emission Method .....      | 23   |
| 8 TEST SETUP PHOTO .....                  | 31   |
| 9 EUT CONSTRUCTIONAL DETAILS .....        | 32   |

## 4 Test Summary

| Test Item                        | Section in CFR 47 | Result |
|----------------------------------|-------------------|--------|
| Antenna requirement              | 15.203/15.247 (c) | Pass   |
| AC Power Line Conducted Emission | 15.207            | N/A    |
| Conducted Output Power           | 15.247 (b)(3)     | Pass   |
| Channel Bandwidth                | 15.247 (a)(2)     | Pass   |
| Power Spectral Density           | 15.247 (e)        | Pass   |
| Band Edge                        | 15.247(d)         | Pass   |
| Spurious Emission                | 15.205/15.209     | Pass   |

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10:2013.

### Measurement Uncertainty

| Test Item                        | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission                | 9kHz ~ 30MHz    | $\pm 4.34\text{dB}$     | (1)   |
| Radiated Emission                | 30MHz ~ 1000MHz | $\pm 4.24\text{dB}$     | (1)   |
| Radiated Emission                | 1GHz ~ 26.5GHz  | $\pm 4.68\text{dB}$     | (1)   |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | $\pm 3.45\text{dB}$     | (1)   |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

|                      |                 |
|----------------------|-----------------|
| Product Name:        | TLSR8258MRC32D  |
| Model No.:           | TLSR8258MRC32D  |
| Serial No.:          | C1T14A5_V1.1    |
| Sample(s) Status     | Engineer sample |
| Hardware:            | 1.0             |
| Software:            | 1.0             |
| Operation Frequency: | 2402MHz-2480MHz |
| Channel Numbers:     | 40              |
| Channel Separation:  | 2MHz            |
| Modulation Type:     | GFSK            |
| Antenna Type:        | PCB Antenna     |
| Antenna Gain:        | 0.0dBi          |
| Power Supply:        | DC 3.0V         |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2402MHz   | 11      | 2422MHz   | 21      | 2442MHz   | 31      | 2462MHz   |
| 2                                   | 2404MHz   | 12      | 2424MHz   | 22      | 2444MHz   | 32      | 2464MHz   |
| ⋮                                   | ⋮         | ⋮       | ⋮         | ⋮       | ⋮         | ⋮       | ⋮         |
| 9                                   | 2418MHz   | 19      | 2438MHz   | 29      | 2458MHz   | 39      | 2478MHz   |
| 10                                  | 2420MHz   | 20      | 2440MHz   | 30      | 2460MHz   | 40      | 2480MHz   |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel             | Frequency |
|---------------------|-----------|
| The lowest channel  | 2402MHz   |
| The middle channel  | 2442MHz   |
| The Highest channel | 2480MHz   |

## 5.2 Test mode

|                                                                       |                                                 |
|-----------------------------------------------------------------------|-------------------------------------------------|
| Transmitting mode                                                     | Keep the EUT in continuously transmitting mode. |
| <i>Remark: During the test, New battery is used during all test .</i> |                                                 |

## 5.3 Description of Support Units

| Manufacturer | Description       | Model | Serial Number |
|--------------|-------------------|-------|---------------|
| Lenovo       | Notebook computer | E470C | PF-10FB5C     |

## 5.4 Test Facility

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"><li>● <b>FCC — Designation No.: CN1252</b><br/><i>Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd</i> has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.</li><li>● <b>ISED — CAB identifier No.: CN0028</b><br/><i>Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd</i> has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028</li></ul> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 5.5 Test Location

|                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All tests were performed at:                                                                                                                                                                                                                                                                                |
| <p>All tests were performed at:<br/>Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.<br/>IOT Test Centre of BlueAsia<br/>No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China<br/>Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673<br/>No tests were sub-contracted.</p> |

## 6 Test Instruments list

| Radiated Emission: |                         |                 |           |                  |                        |                            |
|--------------------|-------------------------|-----------------|-----------|------------------|------------------------|----------------------------|
| Item               | Test Equipment          | Manufacturer    | Model No. | Serial No.       | Cal.Date<br>(mm-dd-yy) | Cal.Due date<br>(mm-dd-yy) |
| 1                  | 3m SAC                  | SKET            | 9m*6 m*6m | 966              | 06-10-2018             | 06-09-2023                 |
| 2                  | Broadband Antenna       | SCHWARZBECK     | VULB9168  | 00836<br>P:00227 | 07-14-2018             | 07-13-2019                 |
| 3                  | Horn Antenna            | SCHWARZBECK     | 9120D     | 01892<br>P:00331 | 07-14-2018             | 07-13-2019                 |
| 4                  | EMI Test Software       | EZ              | EZ        | N/A              | N/A                    | N/A                        |
| 5                  | Pre-amplifier           | SKET            | N/A       | N/A              | 07-19-2018             | 07-18-2019                 |
| 6                  | Spectrum analyzer       | Rohde & Schwarz | FSP40     | 100817           | 05-24-2018             | 05-23-2019                 |
| 7                  | EMI Test Receiver       | Rohde & Schwarz | ESR7      | 101199           | 03-21-2019             | 03-20-2020                 |
| 8                  | Controller              | SKET            | N/A       | N/A              | N/A                    | N/A                        |
| 9                  | Vector Signal Generator | Agilent         | E4438C    | MY45092582       | 05-24-2018             | 05-23-2019                 |
| 10                 | Signal Generator        | Agilent         | E8257D    | MY44320250       | 05-24-2018             | 05-23-2019                 |

| Conducted Emission |                              |                 |           |              |                        |                            |
|--------------------|------------------------------|-----------------|-----------|--------------|------------------------|----------------------------|
| Item               | Test Equipment               | Manufacturer    | Model No. | Serial No.   | Cal.Date<br>(mm-dd-yy) | Cal.Due date<br>(mm-dd-yy) |
| 1                  | EMI Test Receiver            | Rohde & Schwarz | ESPI3     | 101082       | 06-10-2018             | 06-09-2019                 |
| 2                  | LISN                         | CHASE           | MN2050D   | 1447         | 12-18-2018             | 12-17-2019                 |
| 3                  | LISN                         | Rohde & Schwarz | ENV216    | 3560.6550.15 | 07-19-2018             | 07-18-2019                 |
| 4                  | EMI Test Software            | EZ              | EZ        | N/A          | N/A                    | N/A                        |
| 5                  | Temperature Humidity Chamber | Mingle          | TH101B    | N/A          | 07-19-2018             | 07-18-2019                 |


| RF Conducted Test: |                              |                 |           |               |                        |                            |
|--------------------|------------------------------|-----------------|-----------|---------------|------------------------|----------------------------|
| Item               | Test Equipment               | Manufacturer    | Model No. | Serial No.    | Cal.Date<br>(mm-dd-yy) | Cal.Due date<br>(mm-dd-yy) |
| 1                  | Spectrum Analyzer            | Agilent         | N9030A    | MY50510123    | 05-24-2018             | 05-23-2019                 |
| 2                  | Spectrum analyzer            | Rohde & Schwarz | FSP40     | 100817        | 05-24-2018             | 05-23-2019                 |
| 3                  | Vector Signal Generator      | Agilent         | E4438C    | MY45092582    | 05-24-2018             | 05-23-2019                 |
| 4                  | Signal Generator             | Agilent         | E8257D    | MY44320250    | 05-24-2018             | 05-23-2019                 |
| 5                  | Power Sensor                 | D.A.R.E         | RPR3006W  | 17I00015SNO27 | 05-24-2018             | 05-23-2019                 |
| 6                  | Power Sensor                 | D.A.R.E         | RPR3006W  | 17I00015SNO28 | 05-24-2018             | 05-23-2019                 |
| 7                  | DC Power Supply              | LODESTAR        | LP305DE   | N/A           | 07-19-2018             | 07-18-2019                 |
| 8                  | Temperature Humidity Chamber | Mingle          | TH101B    | N/A           | 07-19-2018             | 07-18-2019                 |

## 7 Test results and Measurement Data


### 7.1 Antenna requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | FCC Part15 C Section 15.203 /247(c) |
| <p><b>15.203 requirement:</b><br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b><br/>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p> |                                     |
| <b>E.U.T Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |
| <p><i>The antenna is PCB antenna, the best case gain of the antenna is 0.0dBi</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                     |

## 7.2 Conducted Emissions
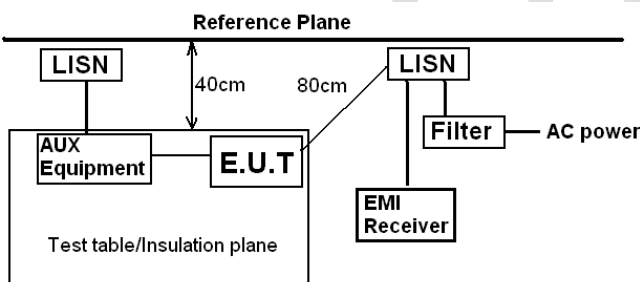
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              |           |
| Test Method:                                     | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
| Test Frequency Range:                            | 150KHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Class / Severity:                                | Class B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |           |
| Receiver setup:                                  | RBW=9KHz, VBW=30KHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Test setup:                                      | <div><p style="text-align: center;"><b>Reference Plane</b></p><p>Remark:<br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.8m</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Test procedure:                                  | <div><ol style="list-style-type: none"><li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li><li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li><li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li></ol></div> |              |           |
| Test Instruments:                                | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
| Test mode:                                       | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
| Test results:                                    | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |              |           |


### 7.3 Conducted Output Power
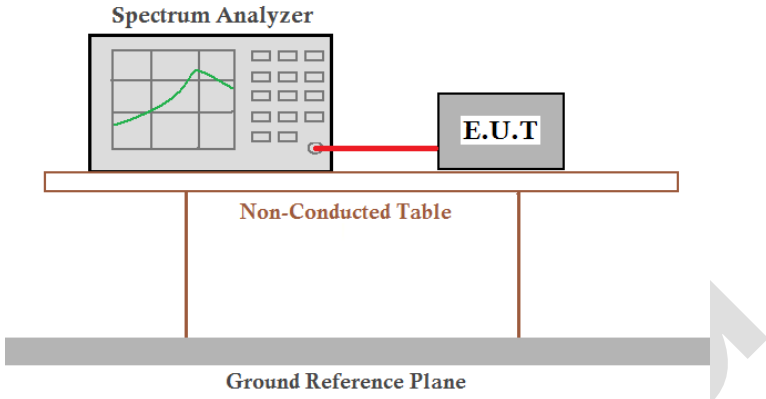
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(3)                                                 |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05                           |
| Limit:            | 30dBm                                                                              |
| Test setup:       |  |
| Test Instruments: | Refer to section 6.0 for details                                                   |
| Test mode:        | Refer to section 5.2 for details                                                   |
| Test results:     | Pass                                                                               |

#### Measurement Data


| Test channel | Peak Output Power (dBm) | Limit(dBm) | Result |
|--------------|-------------------------|------------|--------|
| Lowest       | 8.29                    | 30.00      | Pass   |
| Middle       | 7.85                    |            |        |
| Highest      | 7.62                    |            |        |

Test plot as follows:

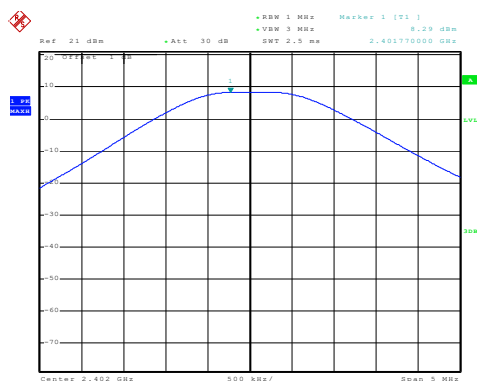


Date: 26.APR.2019 19:04:39

Lowest channel

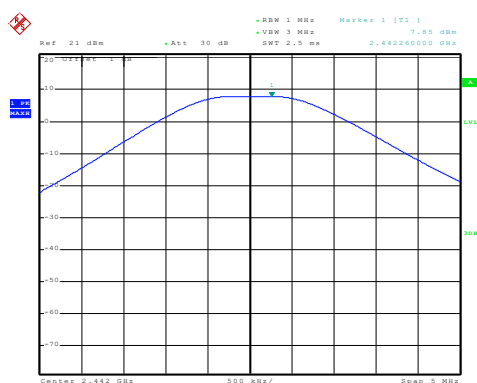

Date: 26.APR.2019 19:05:52


Middle channel

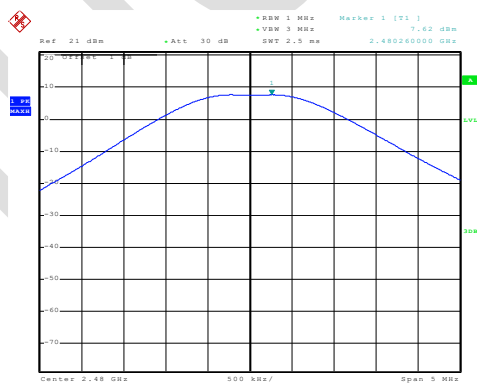

Date: 26.APR.2019 19:07:25


Highest channel

## 7.4 Channel Bandwidth
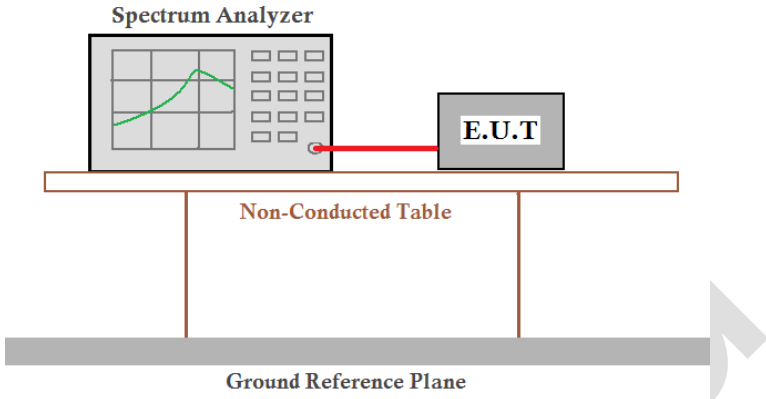
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(2)                                                 |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05                           |
| Limit:            | >500KHz                                                                            |
| Test setup:       |  |
| Test Instruments: | Refer to section 6.0 for details                                                   |
| Test mode:        | Refer to section 5.2 for details                                                   |
| Test results:     | Pass                                                                               |


### Measurement Data

| Test channel | Channel Bandwidth (MHz) | Limit(KHz) | Result |
|--------------|-------------------------|------------|--------|
| Lowest       | 0.684                   | >500       | Pass   |
| Middle       | 0.690                   |            |        |
| Highest      | 0.708                   |            |        |

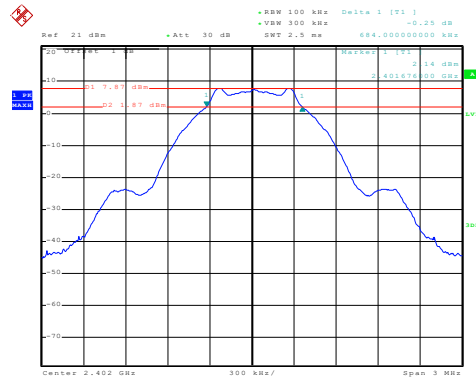


Date: 26.APR.2019 19:18:24

Lowest channel

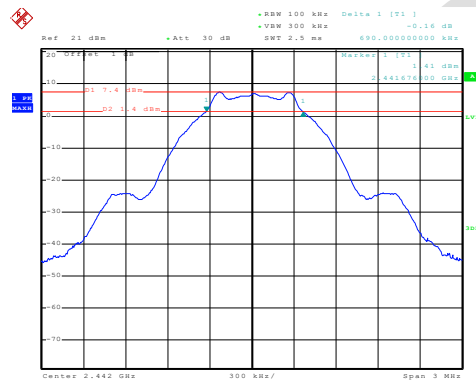

Date: 26.APR.2019 19:20:21


Middle channel

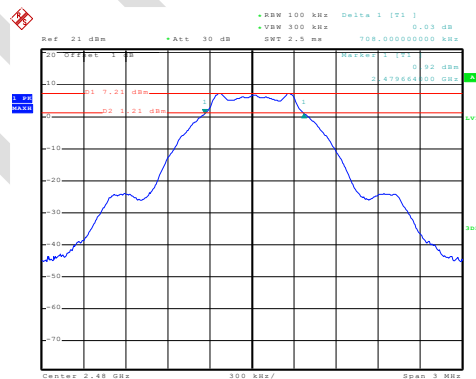

Date: 26.APR.2019 19:24:19


Highest channel

## 7.5 Power Spectral Density
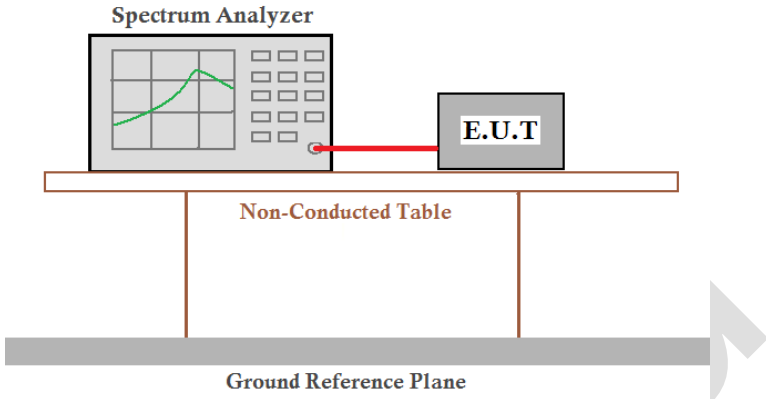
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (e)                                                    |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05                           |
| Limit:            | 8dBm/3kHz                                                                          |
| Test setup:       |  |
| Test Instruments: | Refer to section 6.0 for details                                                   |
| Test mode:        | Refer to section 5.2 for details                                                   |
| Test results:     | Pass                                                                               |


### Measurement Data

| Test channel | Power Spectral Density (dBm/3KHz) | Limit(dBm/3kHz) | Result |
|--------------|-----------------------------------|-----------------|--------|
| Lowest       | -1.38                             | 8.00            | Pass   |
| Middle       | -2.92                             |                 |        |
| Highest      | -1.48                             |                 |        |

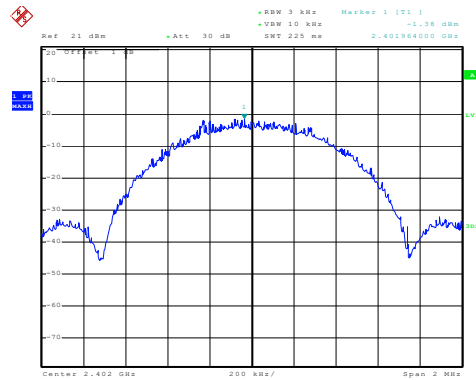


Date: 28.APR.2019 11:31:32

Lowest channel

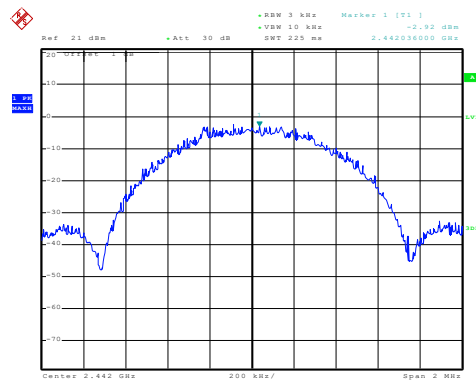

Date: 28.APR.2019 11:31:34

Middle channel

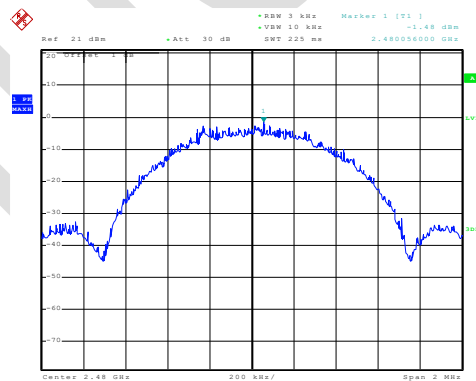


Date: 28.APR.2019 11:45:43


Highest channel

## 7.6 Band edges


### 7.6.1 Conducted Emission Method
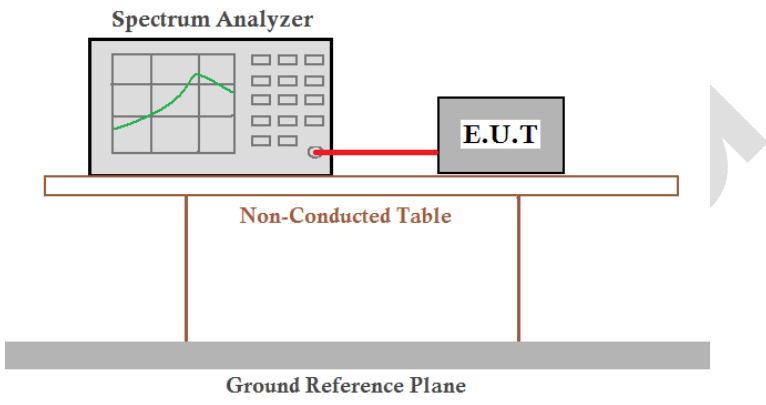
|                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05                                                                                                                                                                                                                                                                                                                                |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup:       |                                                                                                                                                                                                                                                                                                      |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                        |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                        |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

Test plot as follows:

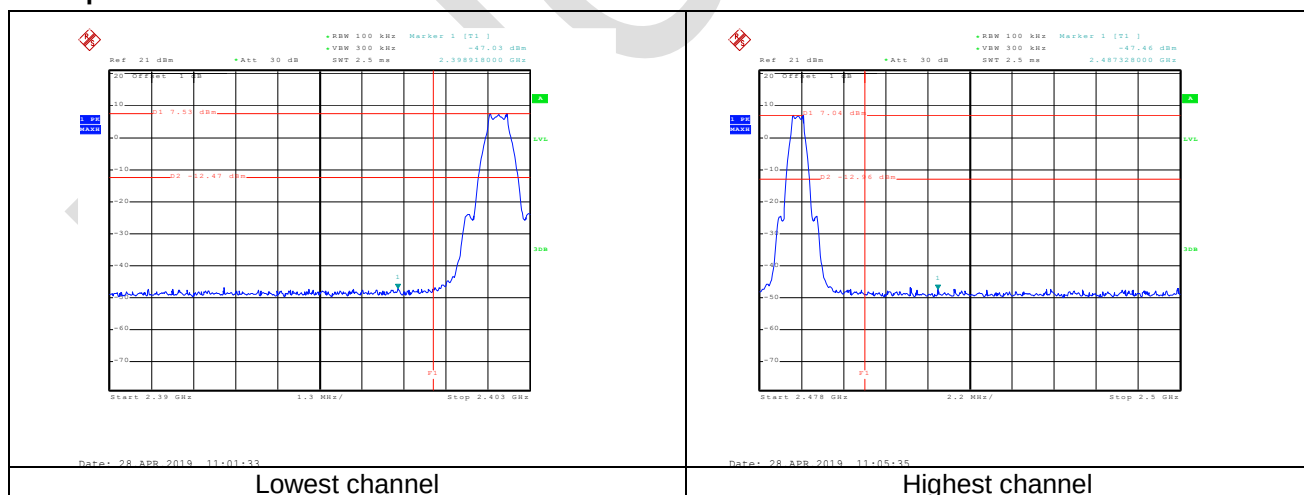

### 7.6.2 Radiated Emission Method
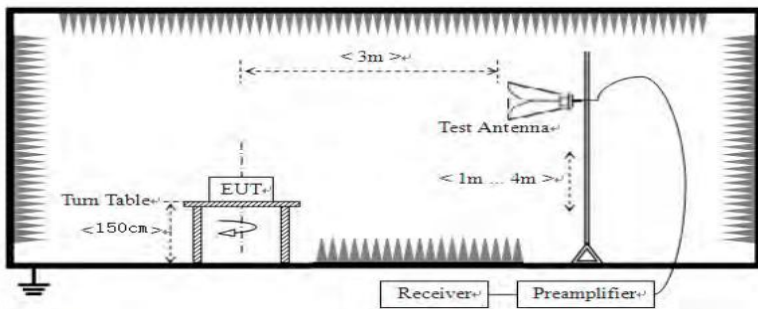
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          |                    |      |         |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------|------|---------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |          |                    |      |         |
| Test Method:          | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |          |                    |      |         |
| Test Frequency Range: | All of the restrict bands were tested, only the worst band's (2310MHz to 2390MHz, 2483.5MHz to 2500MHz) data was showed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |                    |      |         |
| Test site:            | Measurement Distance: 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |                    |      |         |
| Receiver setup:       | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Detector | RBW                | VBW  | Value   |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Peak     | 1MHz               | 3MHz | Peak    |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | RMS      | 1MHz               | 3MHz | Average |
| Limit:                | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          | Limit (dBuV/m @3m) |      | Value   |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |          | 54.00              |      | Average |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          | 74.00              |      | Peak    |
| Test setup:           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |          |                    |      |         |
| Test Procedure:       | <ol style="list-style-type: none"><li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li></ol> |          |                    |      |         |
| Test Instruments:     | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |          |                    |      |         |
| Test mode:            | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |          |                    |      |         |
| Test results:         | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                    |      |         |

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

|               |        |
|---------------|--------|
| Test channel: | Lowest |
|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 2310.00         | 54.14             | -14.56                | 39.58          | 74.00               | -34.42          | Horizontal   |
| 2390.00         | 66.12             | -14.19                | 51.93          | 74.00               | -22.07          | Horizontal   |
| 2310.00         | 48.25             | -14.85                | 33.40          | 74.00               | -40.60          | Vertical     |
| 2390.00         | 58.39             | -14.52                | 43.87          | 74.00               | -30.13          | Vertical     |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 2310.00         | 31.08             | -14.56                | 16.52          | 54.00               | -37.48          | Horizontal   |
| 2390.00         | 32.40             | -14.19                | 18.21          | 54.00               | -35.79          | Horizontal   |
| 2310.00         | 31.39             | -14.85                | 16.54          | 54.00               | -37.46          | Vertical     |
| 2390.00         | 32.62             | -14.52                | 18.10          | 54.00               | -35.90          | Vertical     |

|               |         |
|---------------|---------|
| Test channel: | Highest |
|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 67.43             | -13.66                | 53.77          | 74.00               | -20.23          | Horizontal   |
| 2500.00         | 58.34             | -13.57                | 44.77          | 74.00               | -29.23          | Horizontal   |
| 2483.50         | 45.32             | -14.05                | 31.27          | 74.00               | -42.73          | Vertical     |
| 2500.00         | 48.09             | -13.97                | 34.12          | 74.00               | -39.88          | Vertical     |

**Average value:**


| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 34.61             | -13.66                | 20.95          | 54.00               | -33.05          | Horizontal   |
| 2500.00         | 32.08             | -13.57                | 18.51          | 54.00               | -35.49          | Horizontal   |
| 2483.50         | 32.47             | -14.05                | 18.42          | 54.00               | -35.58          | Vertical     |
| 2500.00         | 32.31             | -13.97                | 18.34          | 54.00               | -35.66          | Vertical     |

**Remark:**

1. Final Level = Receiver Read level + Correct factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Correct factor = Antenna Factor + Cable Loss – Pre-amplifier Factor


## 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method
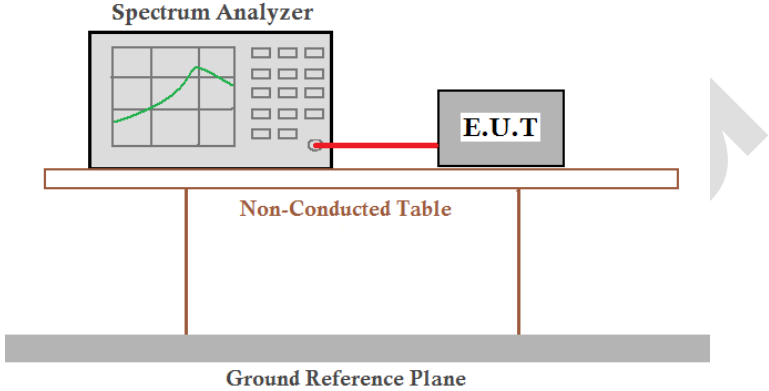
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05                                                                                                                                                                                                                                                                                                                                                                                                                |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.                                                                                 |
| Test setup:       |  <p>The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is positioned above a Ground Reference Plane, which is represented by a thick grey bar at the bottom of the setup.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

**Test plot as follows:**


Lowest channel

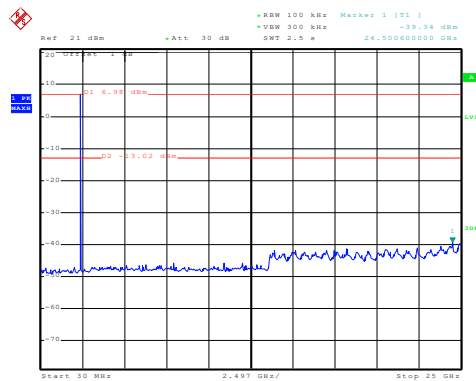

Date: 28.APR.2019 11:52:58

30MHz~25GHz


Middle channel

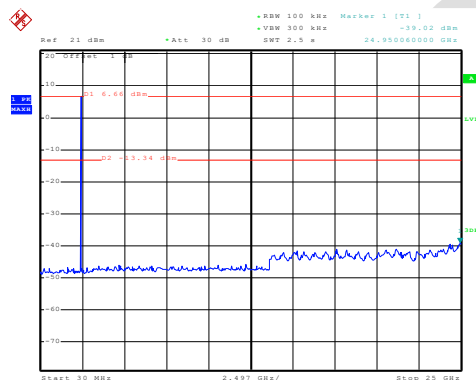

Date: 28.APR.2019 11:22:25

30MHz~25GHz

Highest channel



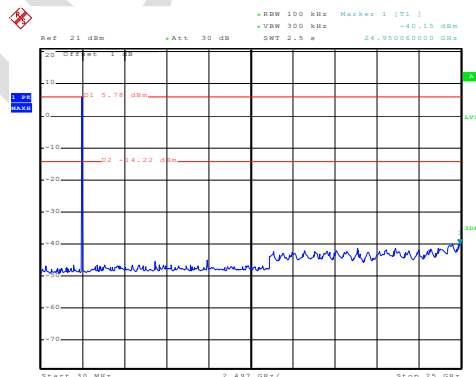


Date: 28.APR.2019 11:26:37

30MHz~25GHz

### 7.7.2 Radiated Emission Method

|                                |                                                                                                                                                                                                                                                                |              |          |                      |            |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------|----------------------|------------|
| Test Requirement:              | FCC Part15 C Section 15.209                                                                                                                                                                                                                                    |              |          |                      |            |
| Test Method:                   | ANSI C63.10:2013                                                                                                                                                                                                                                               |              |          |                      |            |
| Test Frequency Range:          | 9kHz to 25GHz                                                                                                                                                                                                                                                  |              |          |                      |            |
| Test site:                     | Measurement Distance: 3m                                                                                                                                                                                                                                       |              |          |                      |            |
| Receiver setup:                | Frequency                                                                                                                                                                                                                                                      | Detector     | RBW      | VBW                  | Value      |
|                                | 9KHz-150KHz                                                                                                                                                                                                                                                    | PK,AV,QP     | 200Hz    | 600Hz                | PK,AV,QP   |
|                                | 150KHz-30MHz                                                                                                                                                                                                                                                   | PK,AV,QP     | 9KHz     | 30KHz                | PK,AV,QP   |
|                                | 30MHz-1GHz                                                                                                                                                                                                                                                     | Quasi-peak   | 120KHz   | 300KHz               | Quasi-peak |
|                                | Above 1GHz                                                                                                                                                                                                                                                     | Peak         | 1MHz     | 3MHz                 | Peak       |
|                                |                                                                                                                                                                                                                                                                | Peak         | 1MHz     | 10Hz                 | Average    |
| Limit:<br>(Spurious Emissions) | Frequency                                                                                                                                                                                                                                                      | Limit (uV/m) | Value    | Measurement Distance |            |
|                                | 0.009MHz-0.490MHz                                                                                                                                                                                                                                              | 2400/F(KHz)  | PK,AV,QP | 300m                 |            |
|                                | 0.490MHz-1.705MHz                                                                                                                                                                                                                                              | 24000/F(KHz) | QP       | 30m                  |            |
|                                | 1.705MHz-30MHz                                                                                                                                                                                                                                                 | 30           | QP       | 30m                  |            |
|                                | 30MHz-88MHz                                                                                                                                                                                                                                                    | 100          | QP       | 3m                   |            |
|                                | 88MHz-216MHz                                                                                                                                                                                                                                                   | 150          | QP       |                      |            |
|                                | 216MHz-960MHz                                                                                                                                                                                                                                                  | 200          | QP       |                      |            |
|                                | 960MHz-1GHz                                                                                                                                                                                                                                                    | 500          | QP       |                      |            |
|                                | Above 1GHz                                                                                                                                                                                                                                                     | 500          | Average  |                      |            |
|                                |                                                                                                                                                                                                                                                                | 5000         | Peak     |                      |            |
| Limit:<br>(band edge)          | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. |              |          |                      |            |
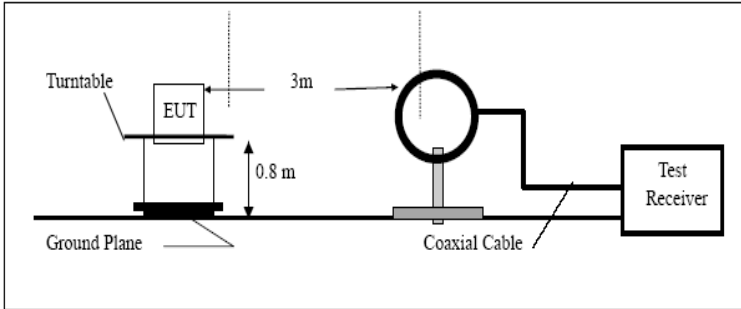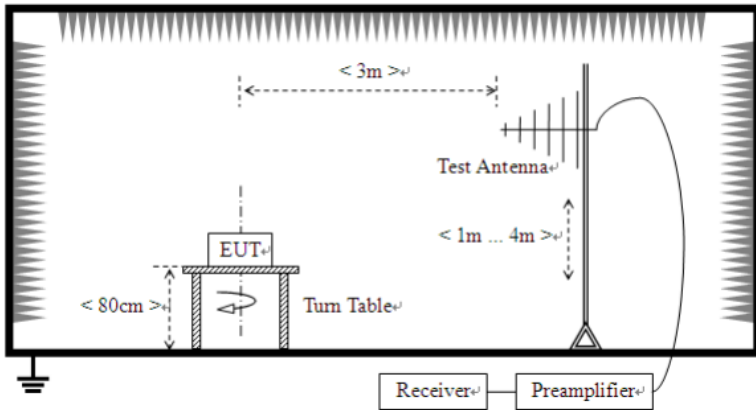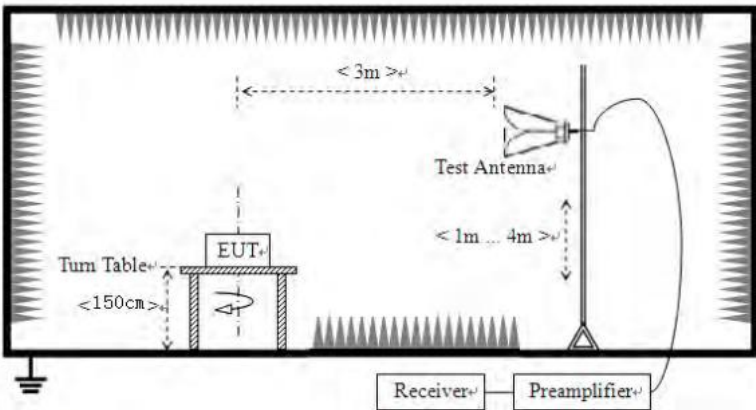
|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test setup:</p>     | <p>Below 30MHz</p>  <p>Below 1GHz</p>  <p>Above 1GHz</p>                                                                                                                                                                                                                                                                                                                                            |
| <p>Test Procedure:</p> | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the</li> </ol> |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | <p>measurement.</p> <p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

*Remark:*

*Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

**Measurement Data**


■ **9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

# Below 1GHz

## Horizontal:


|                         |                |                      |            |
|-------------------------|----------------|----------------------|------------|
| <b>EUT:</b>             | TLSR8258MRC32D | <b>Polarization:</b> | Horizontal |
| <b>Model:</b>           | TLSR8258MRC32D | <b>Power Source:</b> | DC3.0V     |
| <b>Mode:</b>            | TX mode        | <b>Test by:</b>      | Eason      |
| <b>Temp./Hum.(%RH):</b> | 26°C/60%RH     |                      |            |

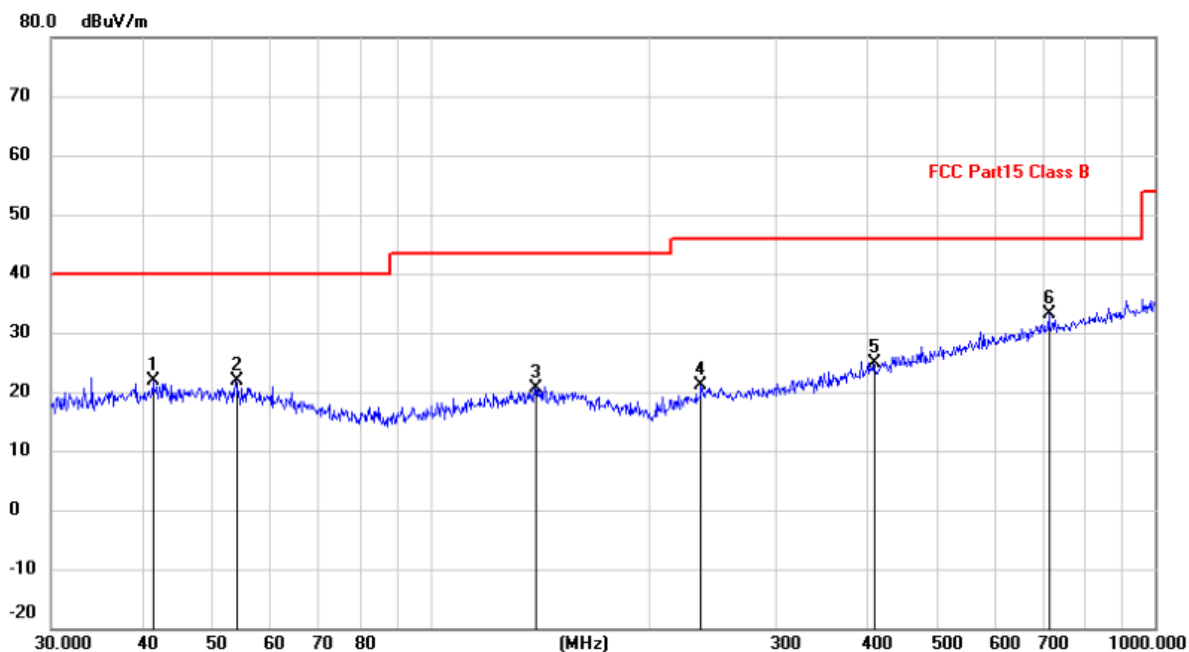

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   |          |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|
|     |     | MHz      | Level   | Factor  | ment     |        |        | Detector |
|     |     |          | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |
| 1   |     | 41.4215  | 8.23    | 13.76   | 21.99    | 40.00  | -18.01 | QP       |
| 2   |     | 53.8818  | 8.43    | 13.57   | 22.00    | 40.00  | -18.00 | QP       |
| 3   |     | 139.3613 | 7.59    | 13.03   | 20.62    | 43.50  | -22.88 | QP       |
| 4   |     | 236.6447 | 8.59    | 12.49   | 21.08    | 46.00  | -24.92 | QP       |
| 5   |     | 408.9460 | 8.16    | 16.72   | 24.88    | 46.00  | -21.12 | QP       |
| 6   | *   | 714.1734 | 10.51   | 22.61   | 33.12    | 46.00  | -12.88 | QP       |

**Vertical:**

|                         |                |                      |          |
|-------------------------|----------------|----------------------|----------|
| <b>EUT:</b>             | TLSR8258MRC32D | <b>Polarziation:</b> | Vertical |
| <b>Model:</b>           | TLSR8258MRC32D | <b>Power Source:</b> | DC3.0V   |
| <b>Mode:</b>            | TX mode        | <b>Test by:</b>      | Eason    |
| <b>Temp./Hum.(%RH):</b> | 26℃/60%RH      |                      |          |

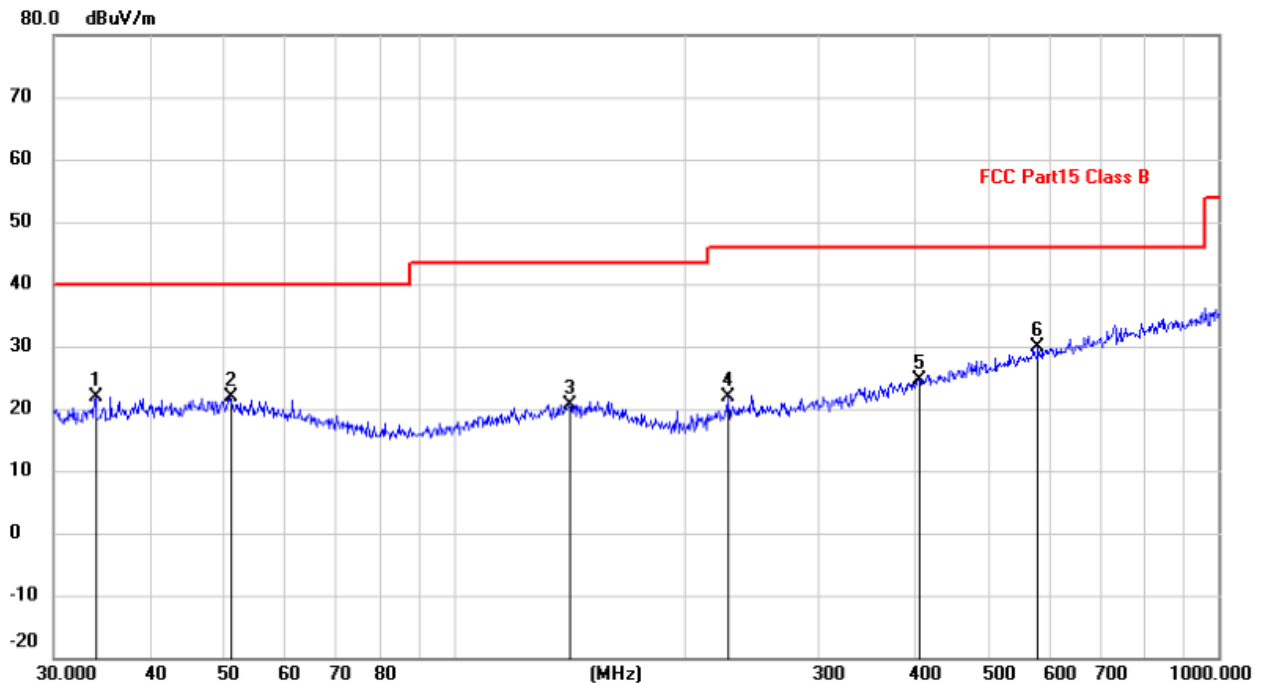

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector |
| 1   |     | 34.0365  | 9.32          | 12.47          | 21.79        | 40.00  | -18.21 | QP       |
| 2   |     | 50.9420  | 8.03          | 13.88          | 21.91        | 40.00  | -18.09 | QP       |
| 3   |     | 141.3298 | 7.64          | 13.05          | 20.69        | 43.50  | -22.81 | QP       |
| 4   |     | 228.4904 | 9.96          | 11.89          | 21.85        | 46.00  | -24.15 | QP       |
| 5   |     | 406.0880 | 8.03          | 16.64          | 24.67        | 46.00  | -21.33 | QP       |
| 6   | *   | 580.7026 | 9.30          | 20.55          | 29.85        | 46.00  | -16.15 | QP       |

**■ Above 1GHz**

|               |        |
|---------------|--------|
| Test channel: | Lowest |
|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4804.00         | 64.48             | -7.43                 | 57.05          | 74.00               | -16.95          | Vertical     |
| 7206.00         | 58.86             | -2.42                 | 56.44          | 74.00               | -17.56          | Vertical     |
| 9608.00         | 59.41             | -2.38                 | 57.03          | 74.00               | -16.97          | Vertical     |
| 12010.00        | *                 |                       |                | 74.00               |                 | Vertical     |
| 14412.00        | *                 |                       |                | 74.00               |                 | Vertical     |
| 4804.00         | 65.14             | -7.43                 | 57.71          | 74.00               | -16.29          | Horizontal   |
| 7206.00         | 57.48             | -2.42                 | 55.06          | 74.00               | -18.94          | Horizontal   |
| 9608.00         | 58.83             | -2.38                 | 56.45          | 74.00               | -17.55          | Horizontal   |
| 12010.00        | *                 |                       |                | 74.00               |                 | Horizontal   |
| 14412.00        | *                 |                       |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4804.00         | 45.60             | -7.43                 | 38.17          | 54.00               | -15.83          | Vertical     |
| 7206.00         | 43.37             | -2.42                 | 40.95          | 54.00               | -13.05          | Vertical     |
| 9608.00         | 44.89             | -2.38                 | 42.51          | 54.00               | -11.49          | Vertical     |
| 12010.00        | *                 |                       |                | 54.00               |                 | Vertical     |
| 14412.00        | *                 |                       |                | 54.00               |                 | Vertical     |
| 4804.00         | 45.62             | -7.43                 | 38.19          | 54.00               | -15.81          | Horizontal   |
| 7206.00         | 45.07             | -2.42                 | 42.65          | 54.00               | -11.35          | Horizontal   |
| 9608.00         | 44.56             | -2.38                 | 42.18          | 54.00               | -11.82          | Horizontal   |
| 12010.00        | *                 |                       |                | 54.00               |                 | Horizontal   |
| 14412.00        | *                 |                       |                | 54.00               |                 | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Correct factor
2. "\*", means this data is the too weak instrument of signal is unable to test.
3. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor

|               |        |
|---------------|--------|
| Test channel: | Middle |
|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4884.00         | 63.11             | -7.49                 | 55.62          | 74.00               | -18.38          | Vertical     |
| 7326.00         | 59.66             | -2.40                 | 57.26          | 74.00               | -16.74          | Vertical     |
| 9768.00         | 58.81             | -2.38                 | 56.43          | 74.00               | -17.57          | Vertical     |
| 12210.00        | *                 |                       |                | 74.00               |                 | Vertical     |
| 14652.00        | *                 |                       |                | 74.00               |                 | Vertical     |
| 4884.00         | 58.87             | -7.49                 | 51.38          | 74.00               | -22.62          | Horizontal   |
| 7326.00         | 57.41             | -2.40                 | 55.01          | 74.00               | -18.99          | Horizontal   |
| 9768.00         | 58.55             | -2.38                 | 56.17          | 74.00               | -17.83          | Horizontal   |
| 12210.00        | *                 |                       |                | 74.00               |                 | Horizontal   |
| 14652.00        | *                 |                       |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4884.00         | 44.57             | -7.49                 | 37.08          | 54.00               | -16.92          | Vertical     |
| 7326.00         | 43.75             | -2.40                 | 41.35          | 54.00               | -12.65          | Vertical     |
| 9768.00         | 44.19             | -2.38                 | 41.81          | 54.00               | -12.19          | Vertical     |
| 12210.00        | *                 |                       |                | 54.00               |                 | Vertical     |
| 14652.00        | *                 |                       |                | 54.00               |                 | Vertical     |
| 4884.00         | 44.32             | -7.49                 | 36.83          | 54.00               | -17.17          | Horizontal   |
| 7326.00         | 45.16             | -2.40                 | 42.76          | 54.00               | -11.24          | Horizontal   |
| 9768.00         | 45.36             | -2.38                 | 42.98          | 54.00               | -11.02          | Horizontal   |
| 12210.00        | *                 |                       |                | 54.00               |                 | Horizontal   |
| 14652.00        | *                 |                       |                | 54.00               |                 | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Correct factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor

|               |         |
|---------------|---------|
| Test channel: | Highest |
|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4960.00         | 63.89             | -7.47                 | 56.42          | 74.00               | -17.58          | Vertical     |
| 7440.00         | 60.32             | -2.45                 | 57.87          | 74.00               | -16.13          | Vertical     |
| 9920.00         | 58.76             | -2.37                 | 56.39          | 74.00               | -17.61          | Vertical     |
| 12400.00        | *                 |                       |                | 74.00               |                 | Vertical     |
| 14880.00        | *                 |                       |                | 74.00               |                 | Vertical     |
| 4960.00         | 57.33             | -7.47                 | 49.86          | 74.00               | -24.14          | Horizontal   |
| 7440.00         | 58.04             | -2.45                 | 55.59          | 74.00               | -18.41          | Horizontal   |
| 9920.00         | 58.23             | -2.37                 | 55.86          | 74.00               | -18.14          | Horizontal   |
| 12400.00        | *                 |                       |                | 74.00               |                 | Horizontal   |
| 14880.00        | *                 |                       |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4960.00         | 45.55             | -7.47                 | 38.08          | 54.00               | -15.92          | Vertical     |
| 7440.00         | 44.72             | -2.45                 | 42.27          | 54.00               | -11.73          | Vertical     |
| 9920.00         | 45.06             | -2.37                 | 42.69          | 54.00               | -11.31          | Vertical     |
| 12400.00        | *                 |                       |                | 54.00               |                 | Vertical     |
| 14880.00        | *                 |                       |                | 54.00               |                 | Vertical     |
| 4960.00         | 44.11             | -7.47                 | 36.64          | 54.00               | -17.36          | Horizontal   |
| 7440.00         | 45.23             | -2.45                 | 42.78          | 54.00               | -11.22          | Horizontal   |
| 9920.00         | 45.17             | -2.37                 | 42.80          | 54.00               | -11.20          | Horizontal   |
| 12400.00        | *                 |                       |                | 54.00               |                 | Horizontal   |
| 14880.00        | *                 |                       |                | 54.00               |                 | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Correct factor.
2. "\*", means this data is the too weak instrument of signal is unable to test.
3. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor.

## 8 Test Setup Photo


### Radiated Emission





## 9 EUT Constructional Details





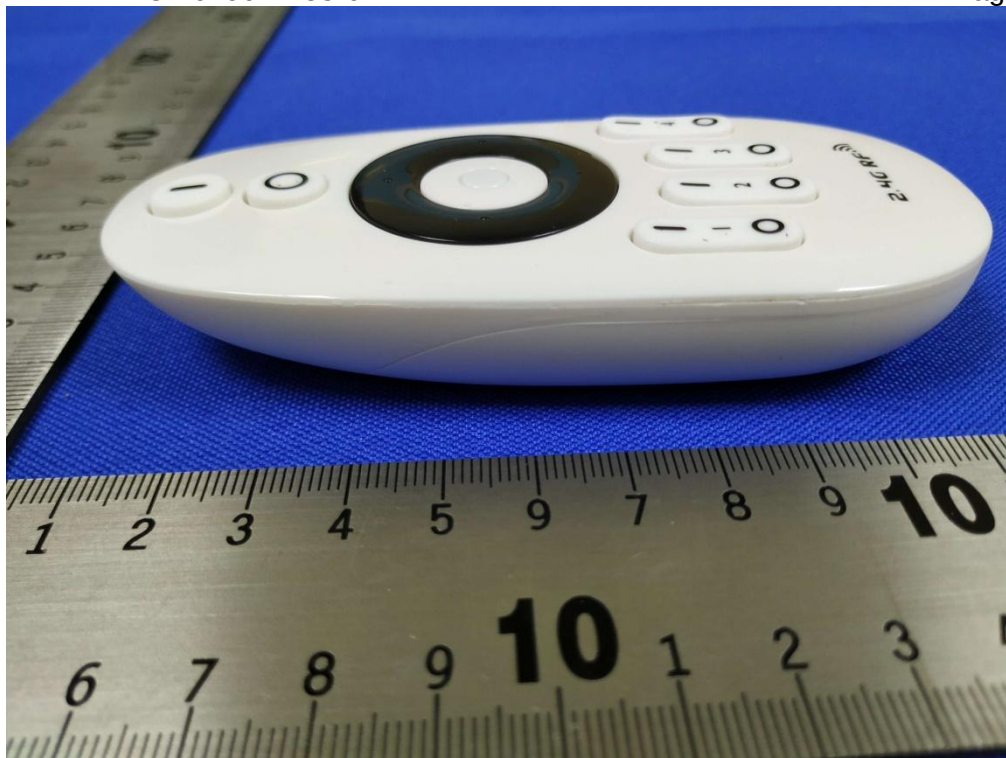



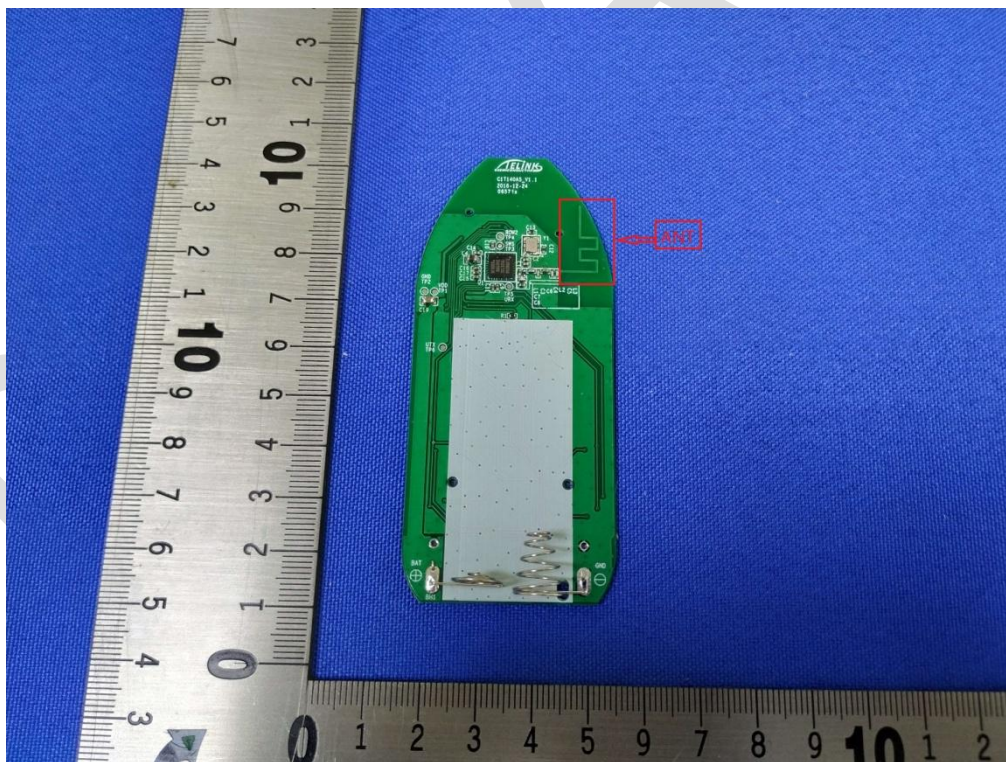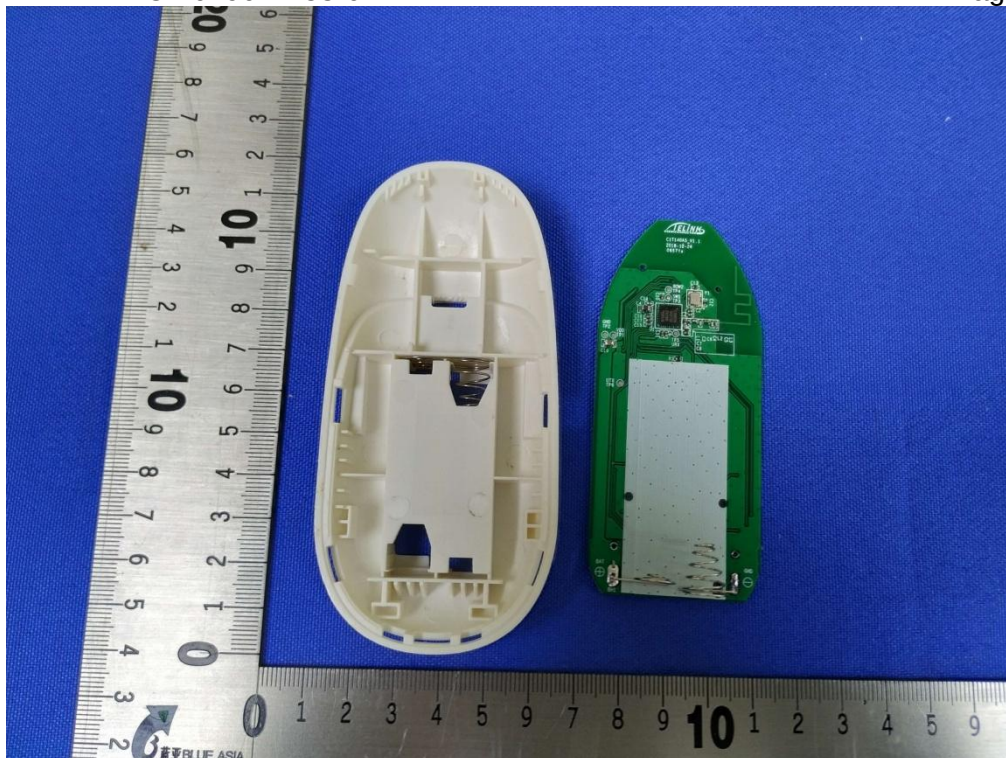



\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.