


Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	11AX40_MCS0_2452	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 15:25:37

Test Graph

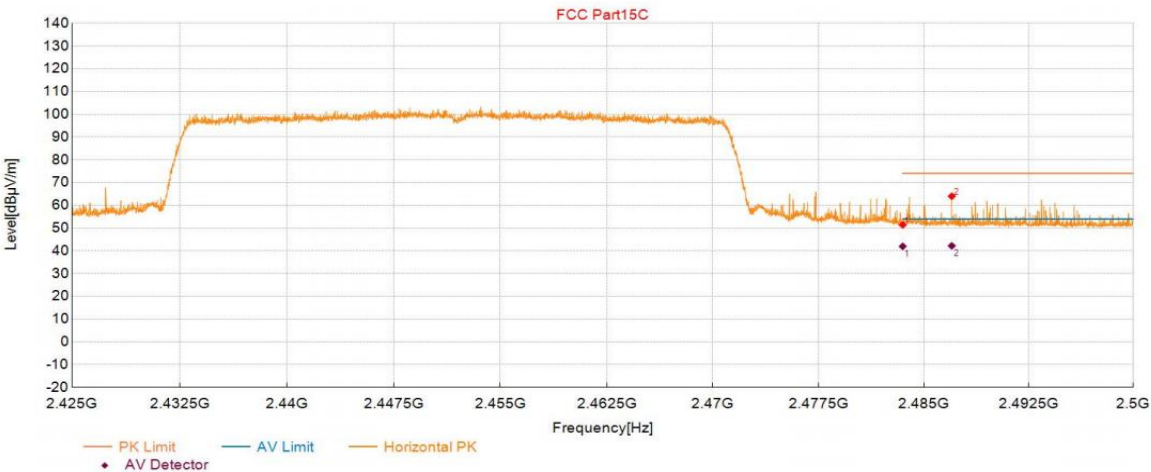

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	44.38	51.42	7.04	74.00	22.58	150	64	Horizontal
2	2487.01	56.96	64.01	7.05	74.00	9.99	150	114	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	34.94	7.04	41.98	54.00	12.02	150	64	Horizontal
2	2487.01	35.16	7.05	42.21	54.00	11.79	150	114	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	11AX40_MCS0_2452	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 15:26:17

Test Graph

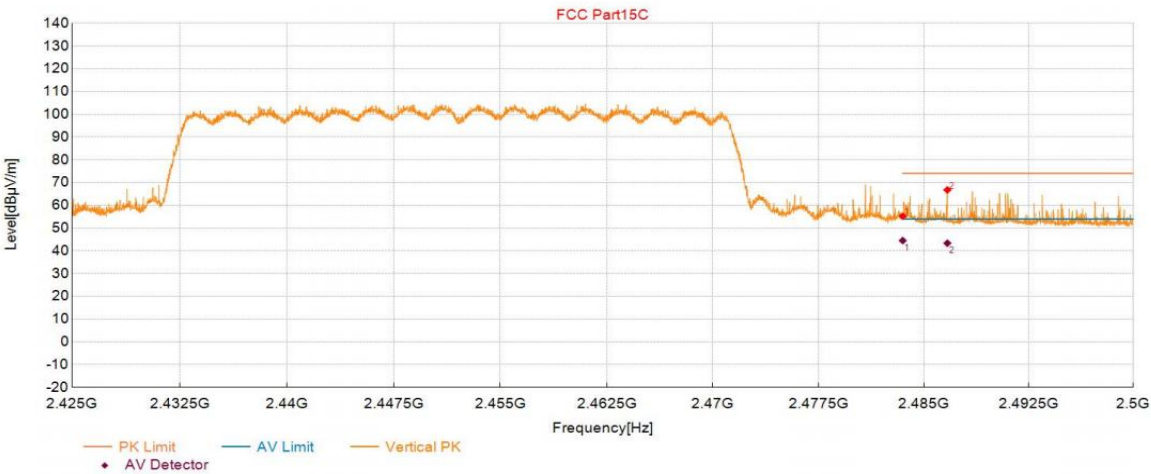

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	48.18	55.22	7.04	74.00	18.78	150	284	Vertical
2	2486.69	59.72	66.77	7.05	74.00	7.23	150	355	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	37.47	7.04	44.51	54.00	9.49	150	284	Vertical
2	2486.69	36.30	7.05	43.35	54.00	10.65	150	355	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 19:28:48

Test Graph

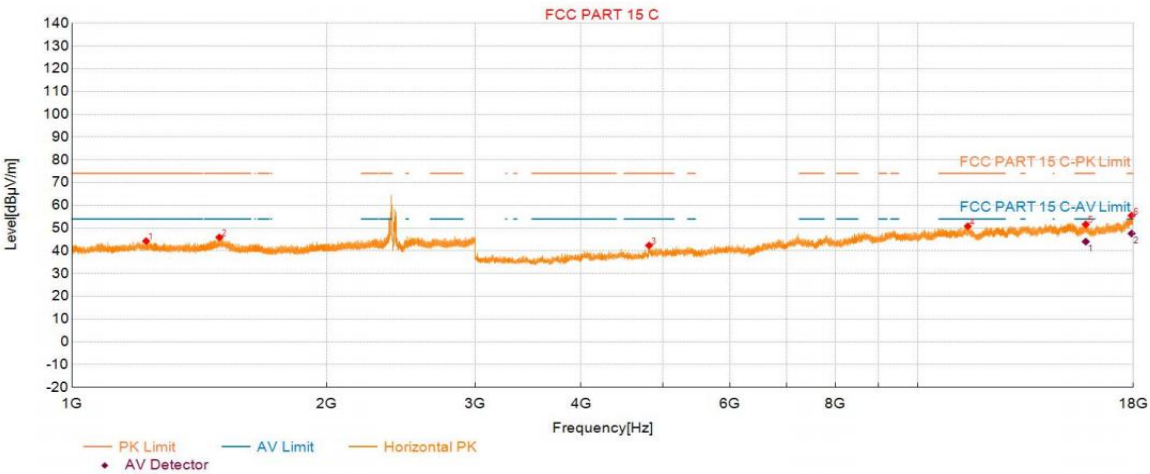

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1223.91	40.80	44.27	3.47	74.00	29.73	150	67	Horizontal
2	1494.22	41.84	45.90	4.06	74.00	28.10	150	298	Horizontal
3	4815.09	50.56	42.35	-8.21	74.00	31.65	150	198	Horizontal
4	11469.42	42.66	50.83	8.17	74.00	23.17	150	33	Horizontal
5	15812.14	38.84	51.64	12.80	74.00	22.36	150	295	Horizontal
6	17915.25	37.02	55.52	18.50	74.00	18.48	150	33	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15812.14	31.25	12.80	44.05	54.00	9.95	150	295	Horizontal
2	17915.25	29.10	18.50	47.60	54.00	6.40	150	33	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 19:30:11

Test Graph

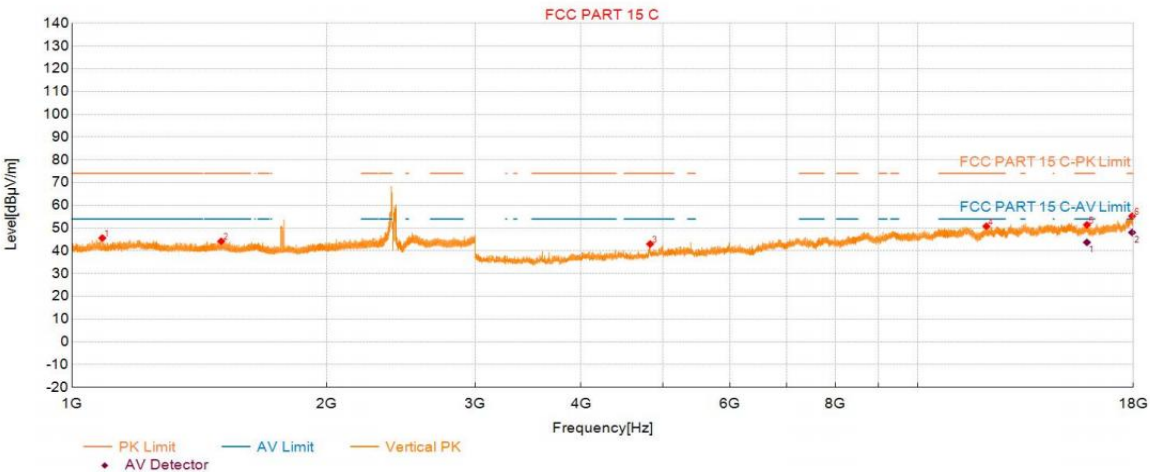

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1086.20	43.48	45.62	2.14	74.00	28.38	150	15	Vertical
2	1501.33	40.11	44.19	4.08	74.00	29.81	150	21	Vertical
3	4827.84	51.08	42.99	-8.09	74.00	31.01	150	212	Vertical
4	12061.95	42.46	50.80	8.34	74.00	23.20	150	127	Vertical
5	15862.39	38.55	51.44	12.89	74.00	22.56	150	323	Vertical
6	17938.50	36.99	55.27	18.28	74.00	18.73	150	196	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15862.39	30.83	12.89	43.72	54.00	10.28	150	323	Vertical
2	17938.50	29.80	18.28	48.08	54.00	5.92	150	196	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2437	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 19:43:32

Test Graph

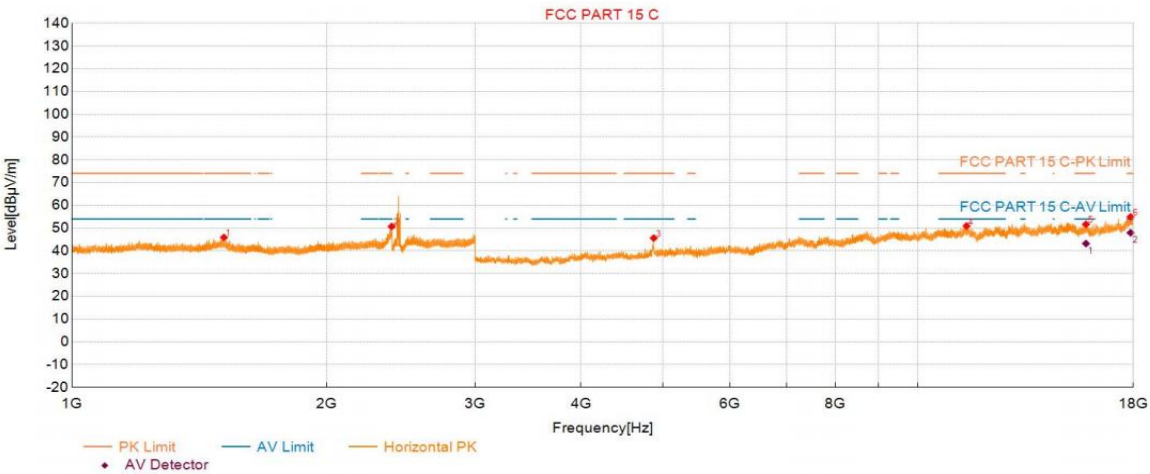

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1512.83	41.79	45.89	4.10	74.00	28.11	150	113	Horizontal
2	2388.47	43.46	50.70	7.24	74.00	23.30	150	138	Horizontal
3	4876.59	53.26	45.61	-7.65	74.00	28.39	150	232	Horizontal
4	11429.72	42.63	50.94	8.31	74.00	23.06	150	238	Horizontal
5	15821.89	38.88	51.70	12.82	74.00	22.30	150	335	Horizontal
6	17864.24	36.42	54.94	18.52	74.00	19.06	150	166	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15821.89	30.39	12.82	43.21	54.00	10.79	150	335	Horizontal
2	17864.24	29.43	18.52	47.95	54.00	6.05	150	166	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2437	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 19:44:55

Test Graph

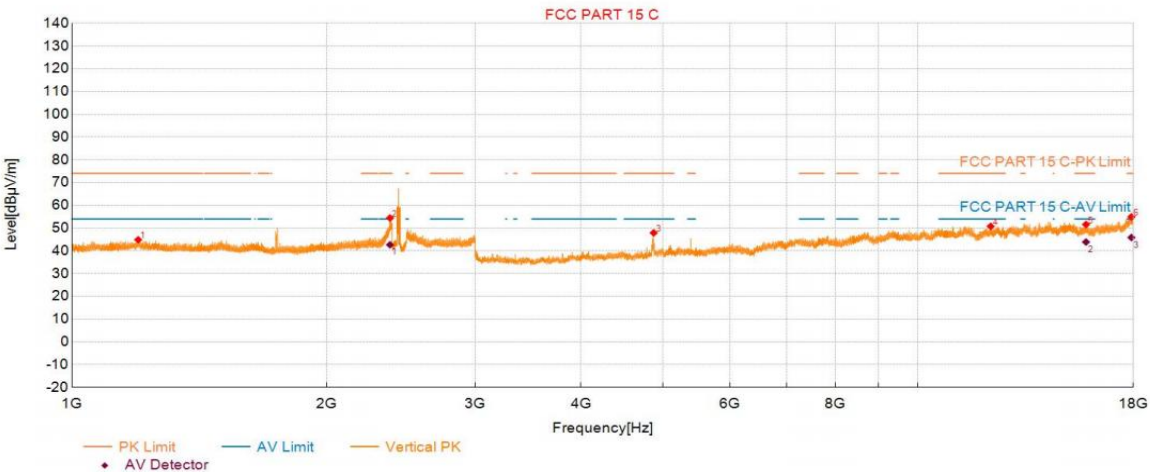

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1197.61	41.47	44.87	3.40	74.00	29.13	150	167	Vertical
2	2377.57	47.21	54.44	7.23	74.00	19.56	150	191	Vertical
3	4875.84	55.56	47.91	-7.65	74.00	26.09	150	219	Vertical
4	12205.96	41.45	50.80	9.35	74.00	23.20	150	266	Vertical
5	15822.64	38.80	51.61	12.81	74.00	22.39	150	174	Vertical
6	17905.50	36.36	54.95	18.59	74.00	19.05	150	281	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2377.57	35.45	7.23	42.68	54.00	11.32	150	191	Vertical
2	15822.64	31.08	12.81	43.89	54.00	10.11	150	174	Vertical
3	17905.50	27.26	18.59	45.85	54.00	8.15	150	281	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 21:44:12

Test Graph

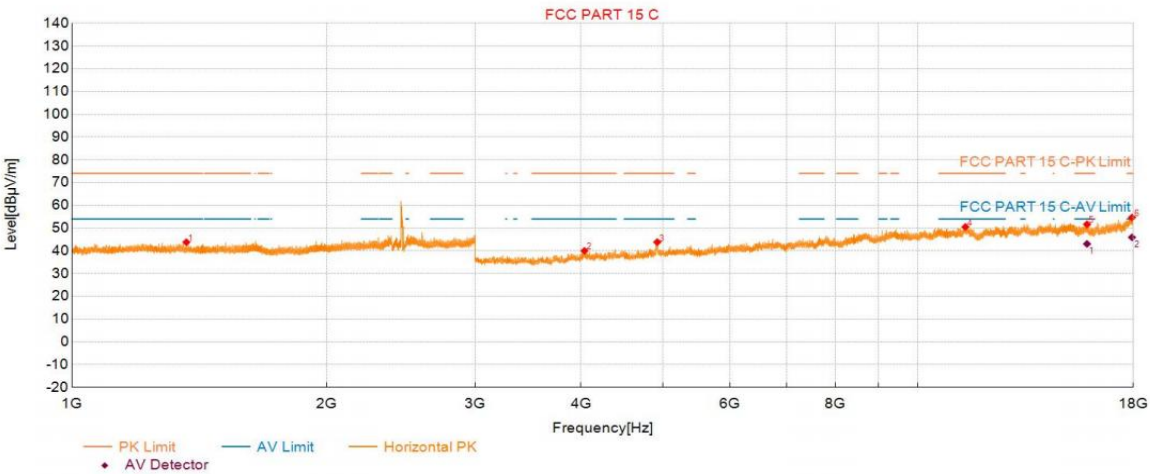

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1365.82	39.87	43.83	3.96	74.00	30.17	150	136	Horizontal
2	4038.05	51.09	40.04	-11.05	74.00	33.96	150	219	Horizontal
3	4923.10	51.18	43.83	-7.35	74.00	30.17	150	204	Horizontal
4	11394.42	42.19	50.54	8.35	74.00	23.46	150	148	Horizontal
5	15866.89	38.78	51.68	12.90	74.00	22.32	150	32	Horizontal
6	17935.50	36.39	54.69	18.30	74.00	19.31	150	204	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15866.89	30.16	12.90	43.06	54.00	10.94	150	32	Horizontal
2	17935.50	27.64	18.30	45.94	54.00	8.06	150	204	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 21:45:34

Test Graph

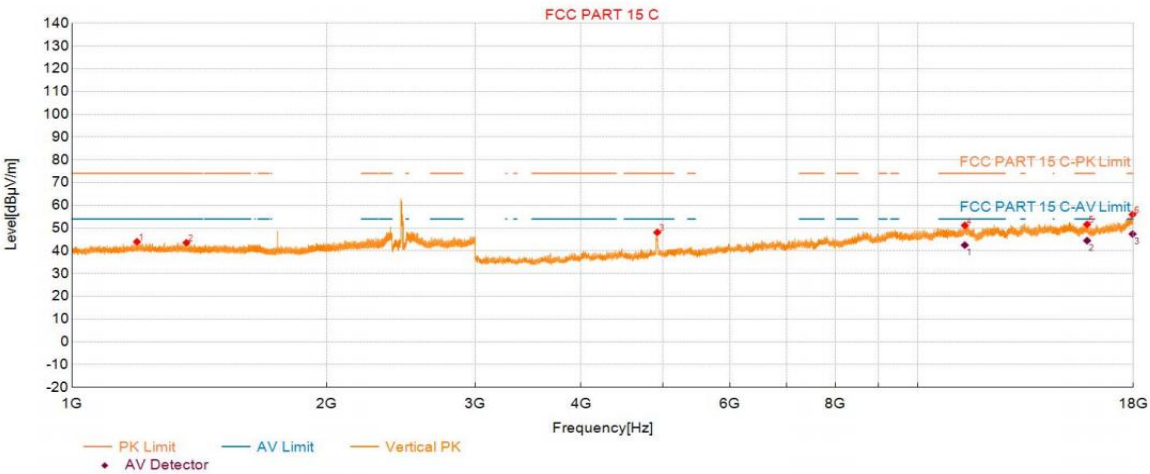

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1193.81	40.67	44.00	3.33	74.00	30.00	150	207	Vertical
2	1365.82	39.59	43.55	3.96	74.00	30.45	150	0	Vertical
3	4922.35	55.44	48.09	-7.35	74.00	25.91	150	219	Vertical
4	11375.67	42.98	51.17	8.19	74.00	22.83	150	356	Vertical
5	15872.14	38.72	51.63	12.91	74.00	22.37	150	356	Vertical
6	17963.25	37.96	56.00	18.04	74.00	18.00	150	25	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	11375.67	34.33	8.19	42.52	54.00	11.48	150	356	Vertical
2	15872.14	31.57	12.91	44.48	54.00	9.52	150	356	Vertical
3	17963.25	29.35	18.04	47.39	54.00	6.61	150	25	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11B_CCK_1M_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:07:37

Test Graph

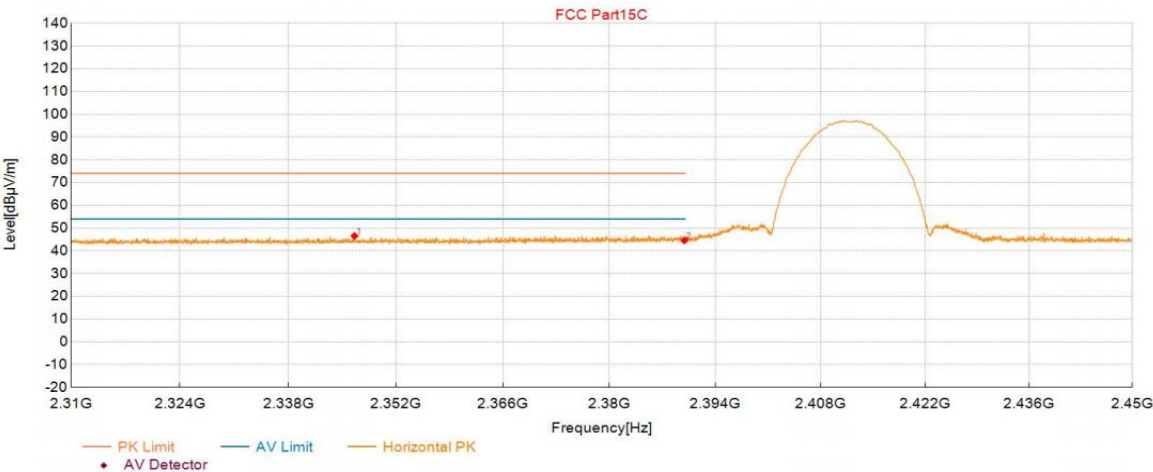

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2346.60	39.99	46.54	6.55	74.00	27.46	150	245	Horizontal
2	2389.90	37.98	44.53	6.55	74.00	29.47	150	141	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11B_CCK_1M_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:08:17

Test Graph

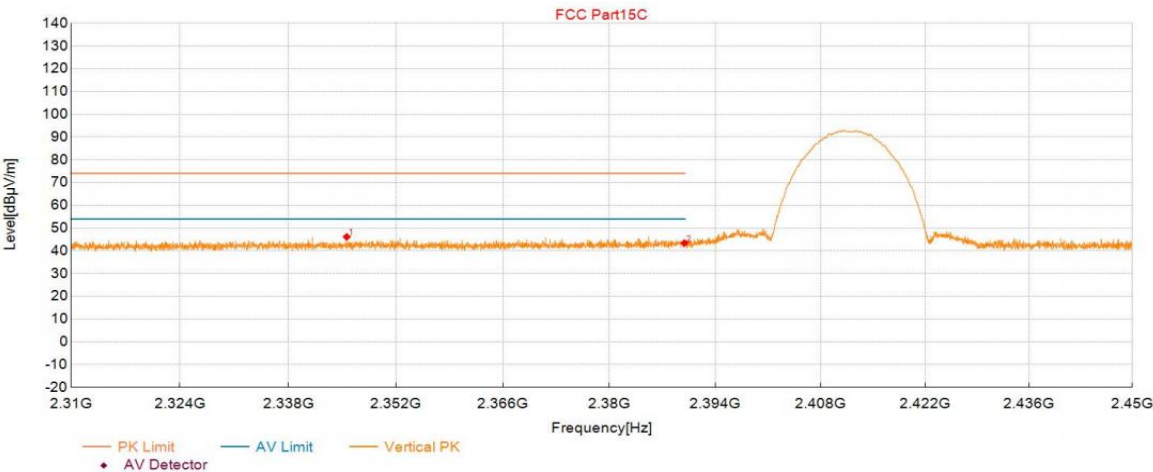

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2345.60	39.63	46.18	6.55	74.00	27.82	150	359	Vertical
2	2389.90	36.85	43.40	6.55	74.00	30.60	150	359	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11B_CCK_1M_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:10:04

Test Graph

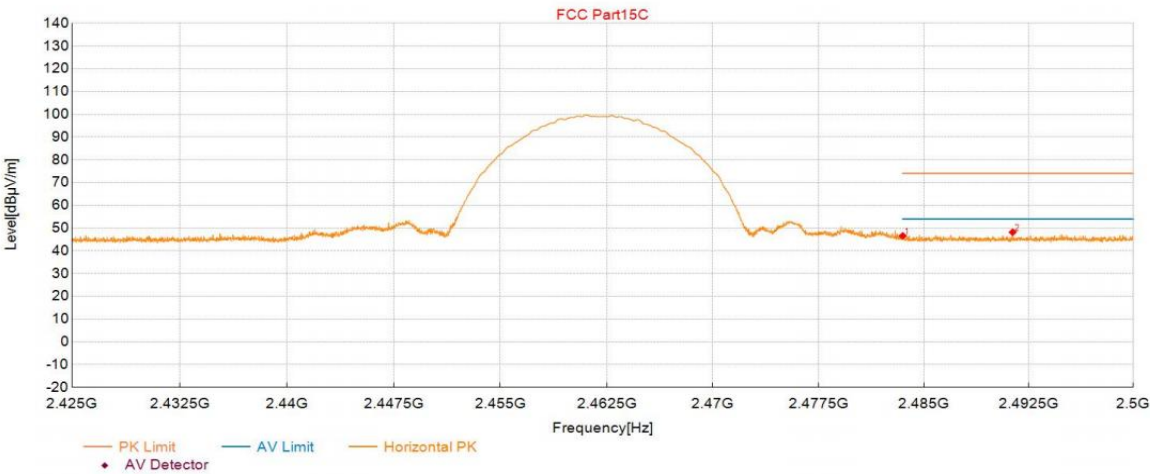

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	39.55	46.59	7.04	74.00	27.41	150	152	Horizontal
2	2491.36	41.13	48.21	7.08	74.00	25.79	150	121	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11B_CCK_1M_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:10:44

Test Graph

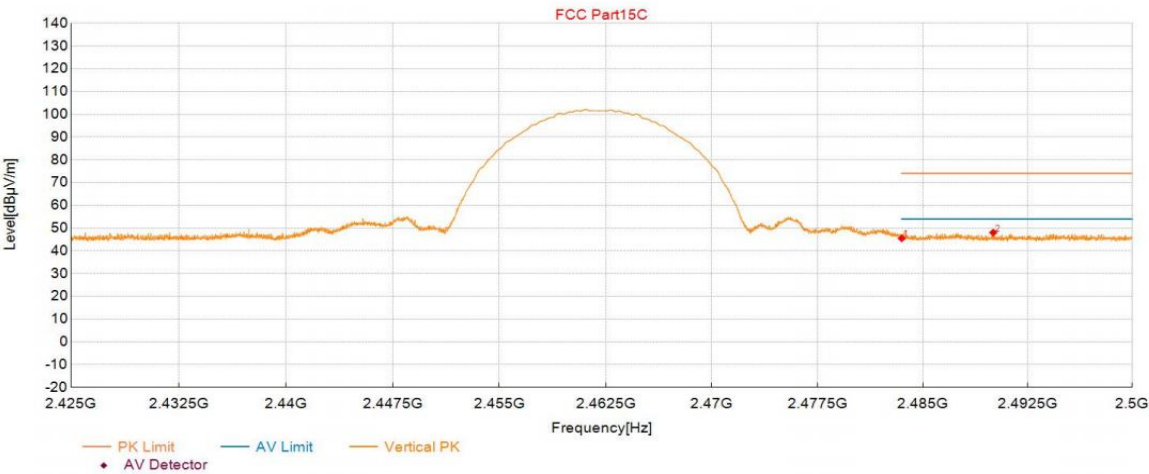

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	38.47	45.51	7.04	74.00	28.49	150	160	Vertical
2	2490.04	40.95	48.03	7.08	74.00	25.97	150	145	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11G_OFDM_6M_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:29:53

Test Graph

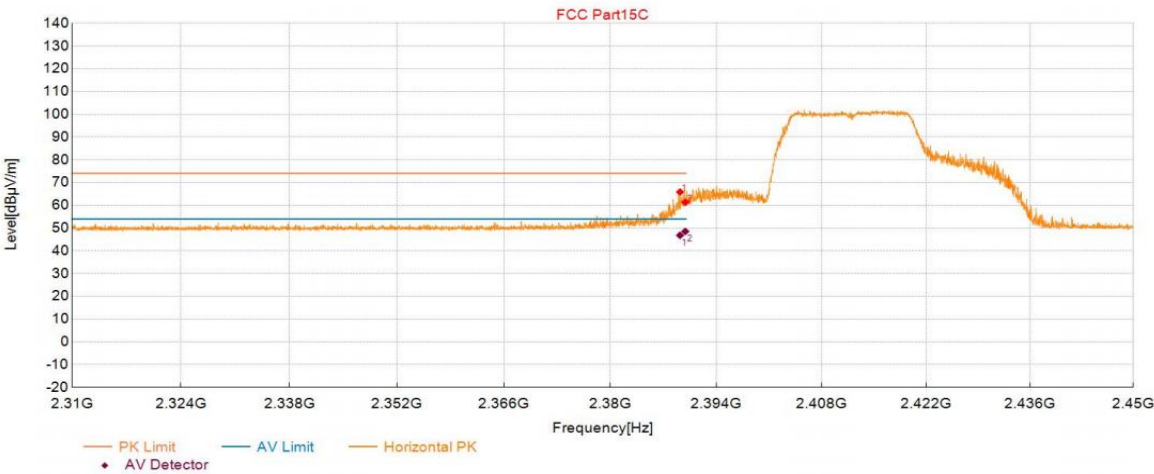

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.20	59.31	65.86	6.55	74.00	8.14	150	118	Horizontal
2	2389.90	54.76	61.31	6.55	74.00	12.69	150	118	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.20	40.27	6.55	46.82	54.00	7.18	150	118	Horizontal
2	2389.90	41.99	6.55	48.54	54.00	5.46	150	118	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11G_OFDM_6M_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:30:33

Test Graph

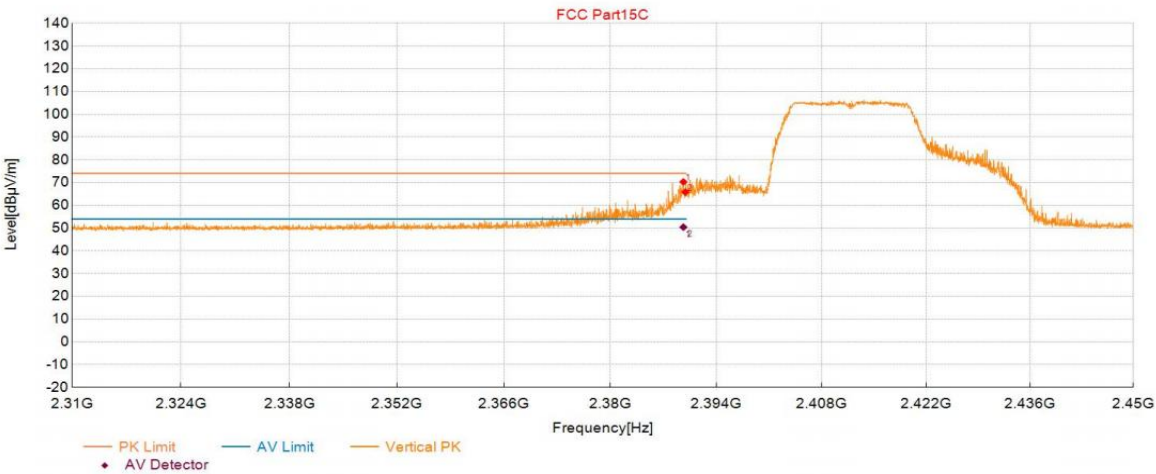

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.65	63.75	70.30	6.55	74.00	3.70	150	189	Vertical
2	2389.90	59.26	65.81	6.55	74.00	8.19	150	189	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.65	43.87	6.55	50.42	54.00	3.58	150	189	Vertical
2	2389.90	44.11	6.55	50.66	54.00	3.34	150	189	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11G_OFDM_6M_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:36:49

Test Graph

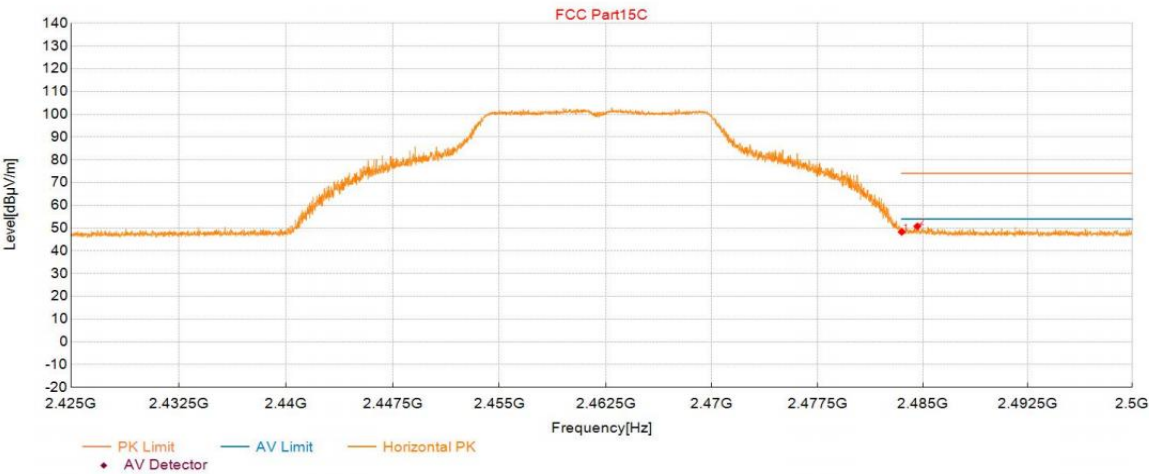

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	41.27	48.31	7.04	74.00	25.69	150	126	Horizontal
2	2484.62	43.75	50.79	7.04	74.00	23.21	150	110	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11G_OFDM_6M_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:37:30

Test Graph

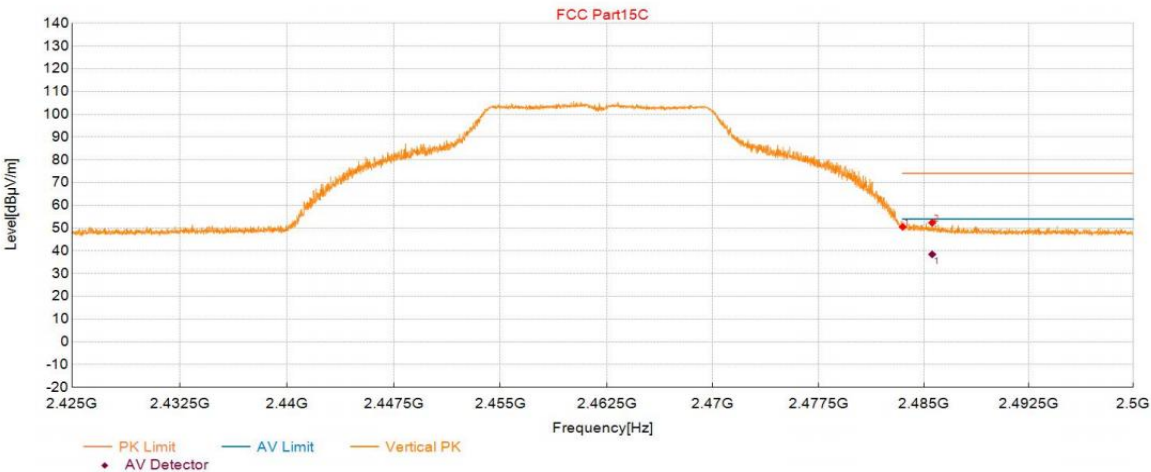

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	43.50	50.54	7.04	74.00	23.46	150	158	Vertical
2	2485.61	45.30	52.35	7.05	74.00	21.65	150	83	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2485.61	31.40	7.05	38.45	54.00	15.55	150	83	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:41:24

Test Graph

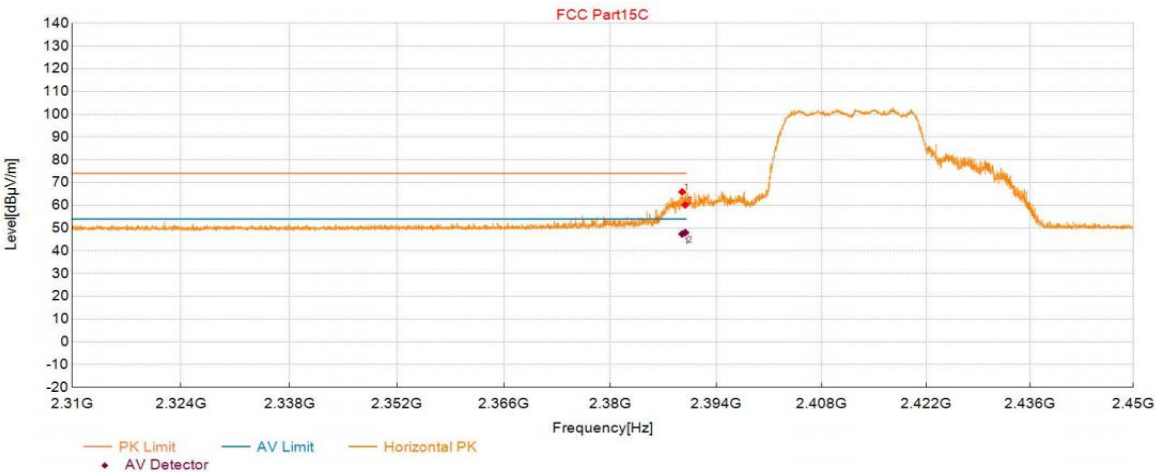

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.48	59.37	65.92	6.55	74.00	8.08	150	116	Horizontal
2	2389.90	53.64	60.19	6.55	74.00	13.81	150	106	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.48	40.85	6.55	47.40	54.00	6.60	150	116	Horizontal
2	2389.90	41.46	6.55	48.01	54.00	5.99	150	106	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:42:04

Test Graph

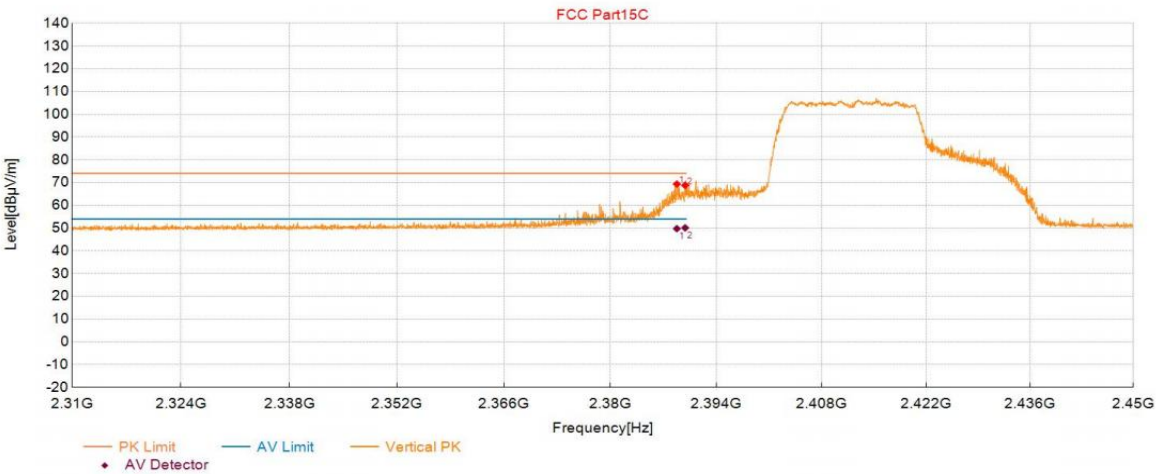

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.78	62.82	69.37	6.55	74.00	4.63	150	189	Vertical
2	2389.87	62.25	68.80	6.55	74.00	5.20	150	193	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.78	43.21	6.55	49.76	54.00	4.24	150	189	Vertical
2	2389.87	43.55	6.55	50.10	54.00	3.90	150	193	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:57:32

Test Graph

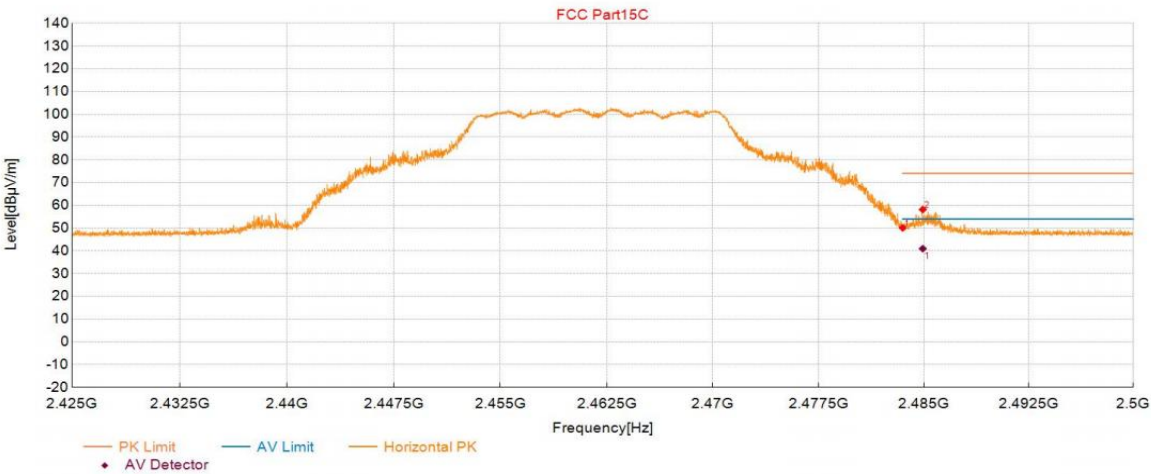

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	43.06	50.10	7.04	74.00	23.90	150	105	Horizontal
2	2484.94	51.13	58.17	7.04	74.00	15.83	150	111	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2484.94	33.93	7.04	40.97	54.00	13.03	150	111	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 16:58:13

Test Graph

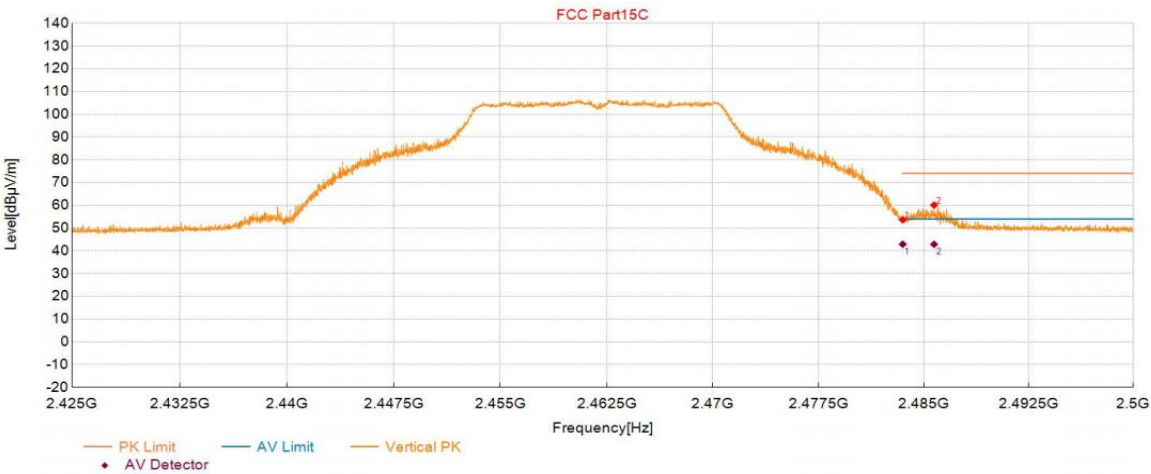

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	46.64	53.68	7.04	74.00	20.32	150	155	Vertical
2	2485.75	53.05	60.10	7.05	74.00	13.90	150	160	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	35.86	7.04	42.90	54.00	11.10	150	155	Vertical
2	2485.75	35.82	7.05	42.87	54.00	11.13	150	160	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N40_MCS8_2422	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:06:52

Test Graph

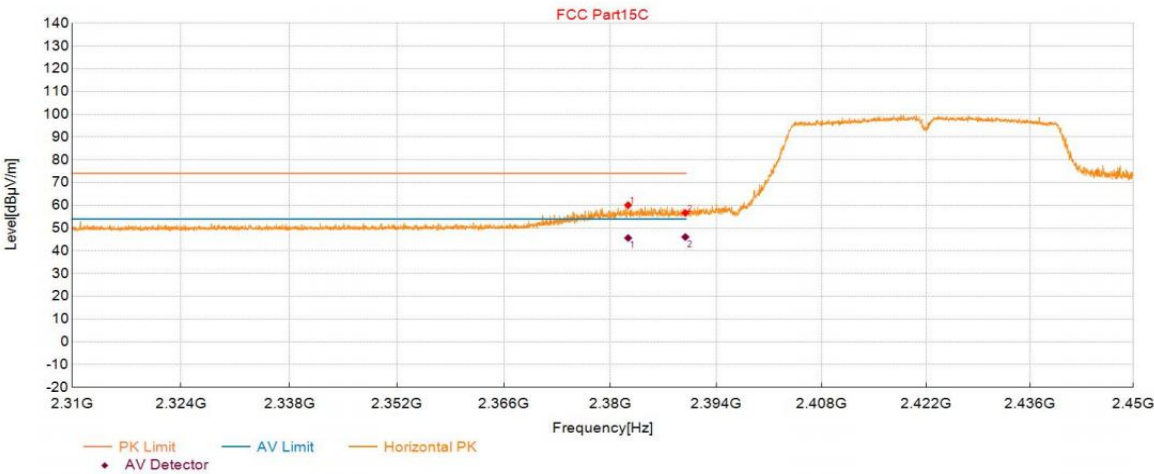

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2382.34	53.54	60.08	6.54	74.00	13.92	150	194	Horizontal
2	2389.90	50.11	56.66	6.55	74.00	17.34	150	194	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2382.34	39.11	6.54	45.65	54.00	8.35	150	194	Horizontal
2	2389.90	39.53	6.55	46.08	54.00	7.92	150	194	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N40_MCS8_2422	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:07:32

Test Graph

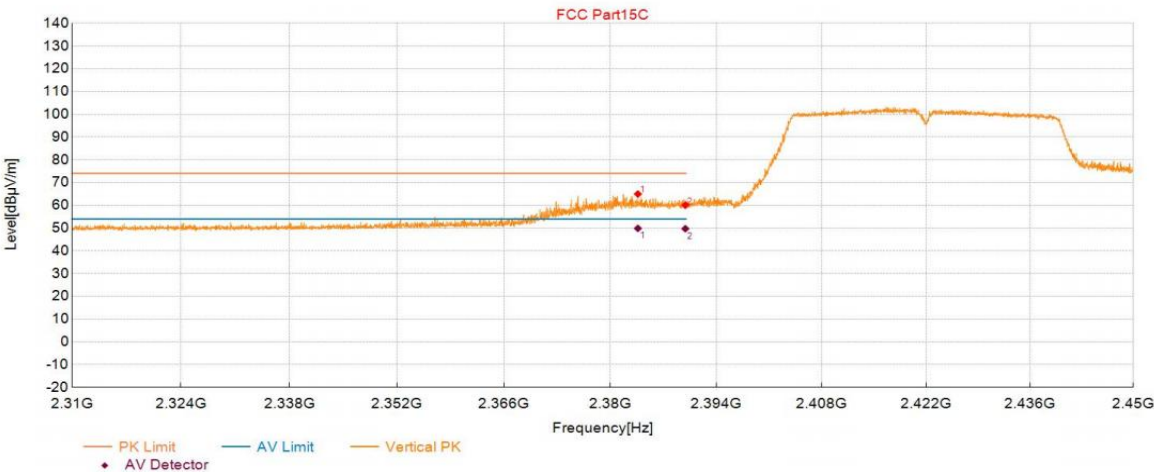

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2383.63	58.43	64.98	6.55	74.00	9.02	150	199	Vertical
2	2389.90	53.48	60.03	6.55	74.00	13.97	150	199	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2383.63	43.33	6.55	49.88	54.00	4.12	150	199	Vertical
2	2389.90	43.19	6.55	49.74	54.00	4.26	150	199	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N40_MCS8_2452	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:11:58

Test Graph

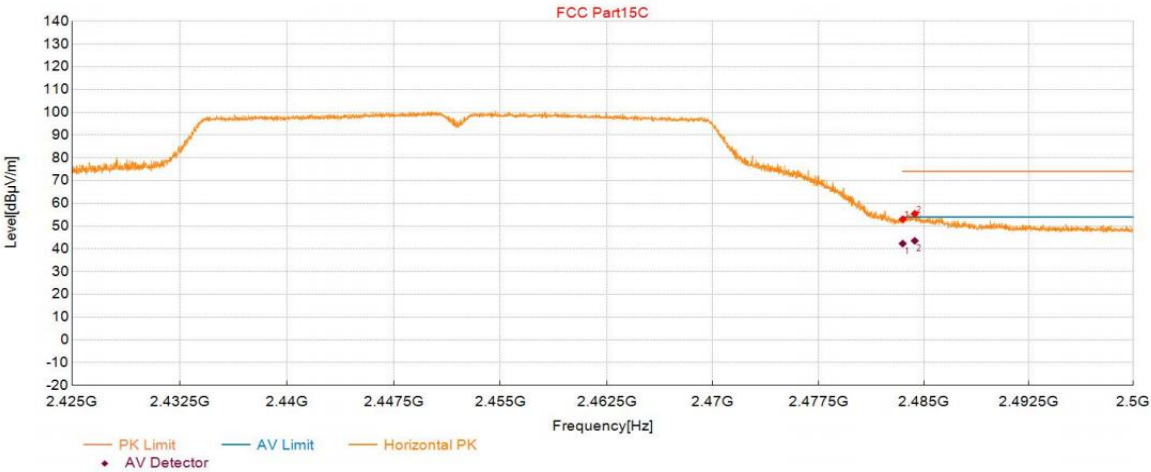

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	46.01	53.05	7.04	74.00	20.95	150	89	Horizontal
2	2484.37	48.38	55.42	7.04	74.00	18.58	150	115	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	35.27	7.04	42.31	54.00	11.69	150	89	Horizontal
2	2484.37	36.48	7.04	43.52	54.00	10.48	150	115	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11N40_MCS8_2452	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:12:39

Test Graph

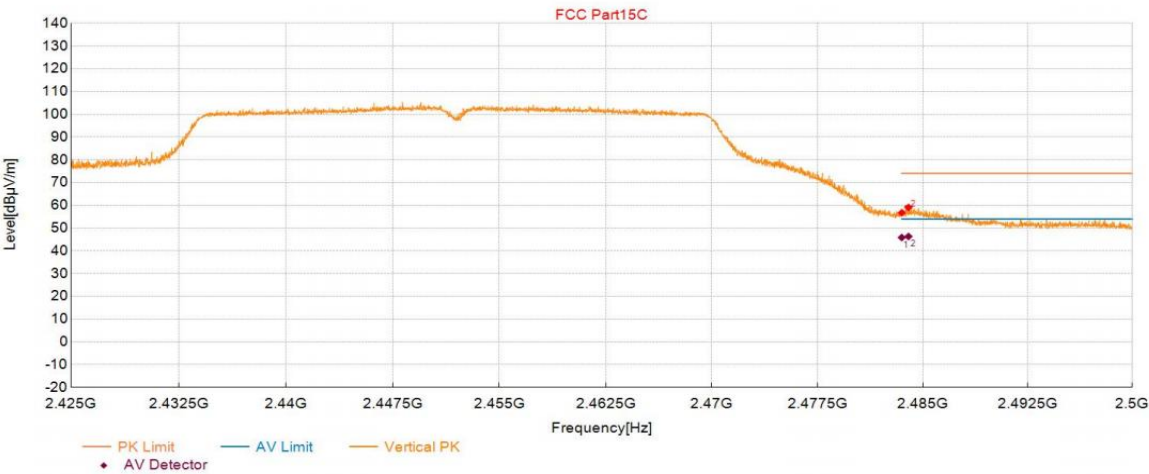

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	49.70	56.74	7.04	74.00	17.26	150	216	Vertical
2	2483.99	52.03	59.07	7.04	74.00	14.93	150	211	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	38.82	7.04	45.86	54.00	8.14	150	216	Vertical
2	2483.99	39.28	7.04	46.32	54.00	7.68	150	211	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11AX20_MCS0_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:15:46

Test Graph

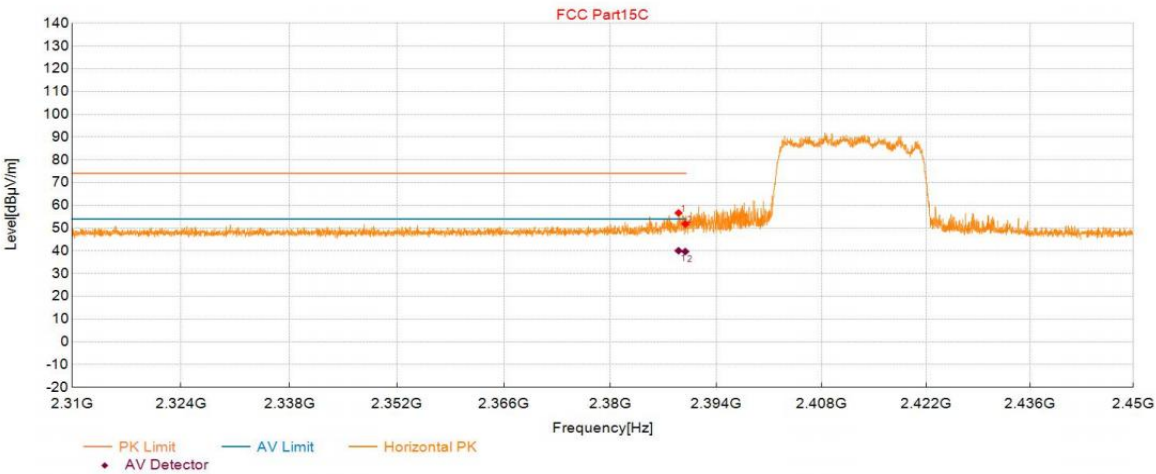

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.00	50.11	56.66	6.55	74.00	17.34	150	359	Horizontal
2	2389.90	45.27	51.82	6.55	74.00	22.18	150	359	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.00	33.50	6.55	40.05	54.00	13.95	150	359	Horizontal
2	2389.90	33.14	6.55	39.69	54.00	14.31	150	359	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11AX20_MCS0_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:15:53

Test Graph

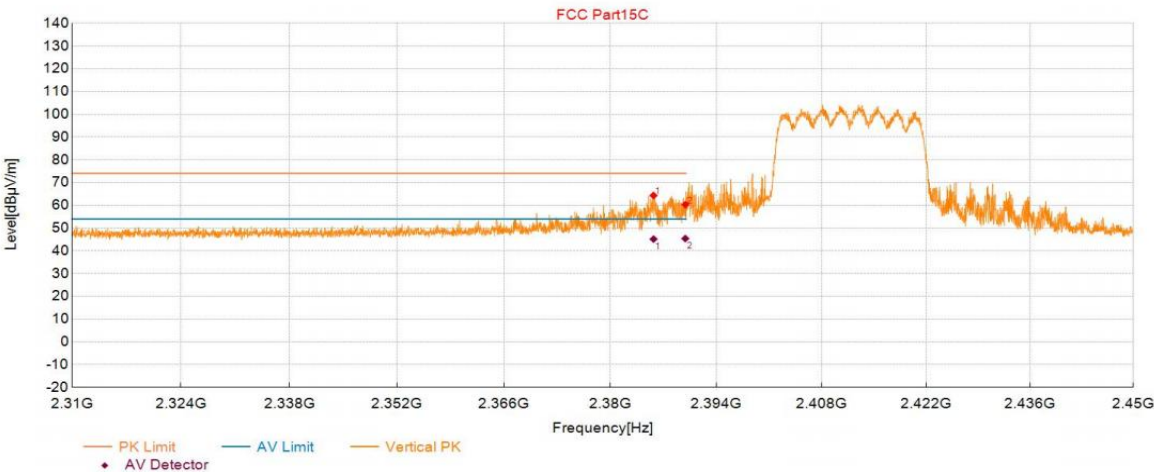

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2385.70	57.78	64.33	6.55	74.00	9.67	150	359	Vertical
2	2389.90	53.74	60.29	6.55	74.00	13.71	150	359	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2385.70	38.61	6.55	45.16	54.00	8.84	150	359	Vertical
2	2389.90	38.86	6.55	45.41	54.00	8.59	150	359	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11AX20_MCS0_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:20:46

Test Graph

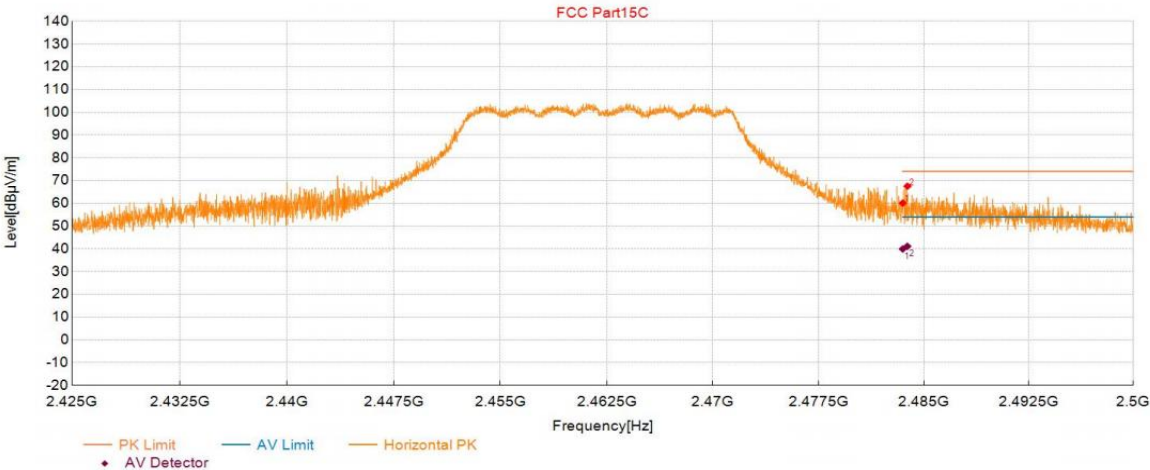

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	53.07	60.11	7.04	74.00	13.89	150	37	Horizontal
2	2483.84	60.48	67.52	7.04	74.00	6.48	150	117	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	32.88	7.04	39.92	54.00	14.08	150	37	Horizontal
2	2483.84	34.08	7.04	41.12	54.00	12.88	150	117	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11AX20_MCS0_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:21:26

Test Graph

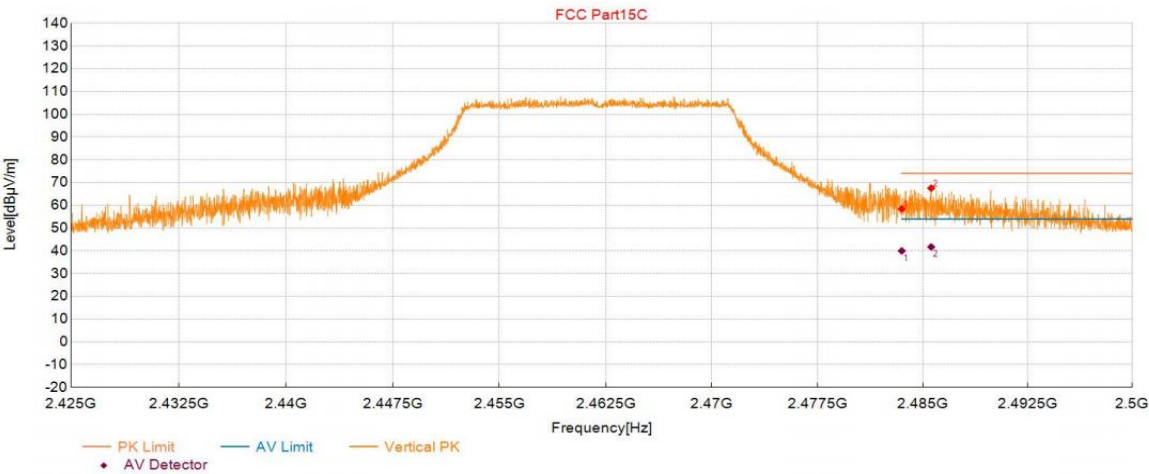

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	51.42	58.46	7.04	74.00	15.54	150	124	Vertical
2	2485.61	60.49	67.54	7.05	74.00	6.46	150	203	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	32.93	7.04	39.97	54.00	14.03	150	124	Vertical
2	2485.61	34.67	7.05	41.72	54.00	12.28	150	203	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11AX40_MCS0_2422	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:28:46

Test Graph

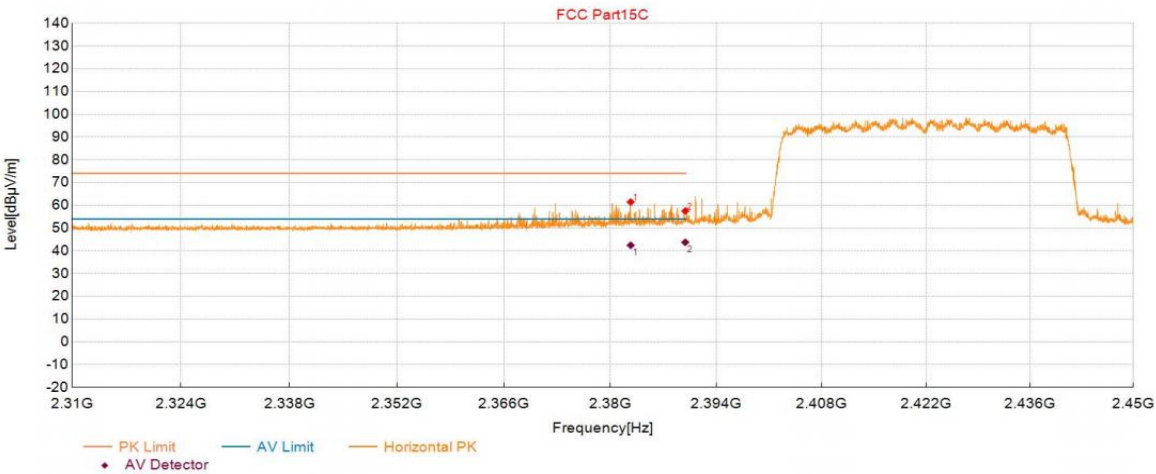

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2382.67	54.93	61.47	6.54	74.00	12.53	150	116	Horizontal
2	2389.90	50.99	57.54	6.55	74.00	16.46	150	105	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2382.67	35.92	6.54	42.46	54.00	11.54	150	116	Horizontal
2	2389.90	37.20	6.55	43.75	54.00	10.25	150	105	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11AX40_MCS0_2422	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:29:27

Test Graph

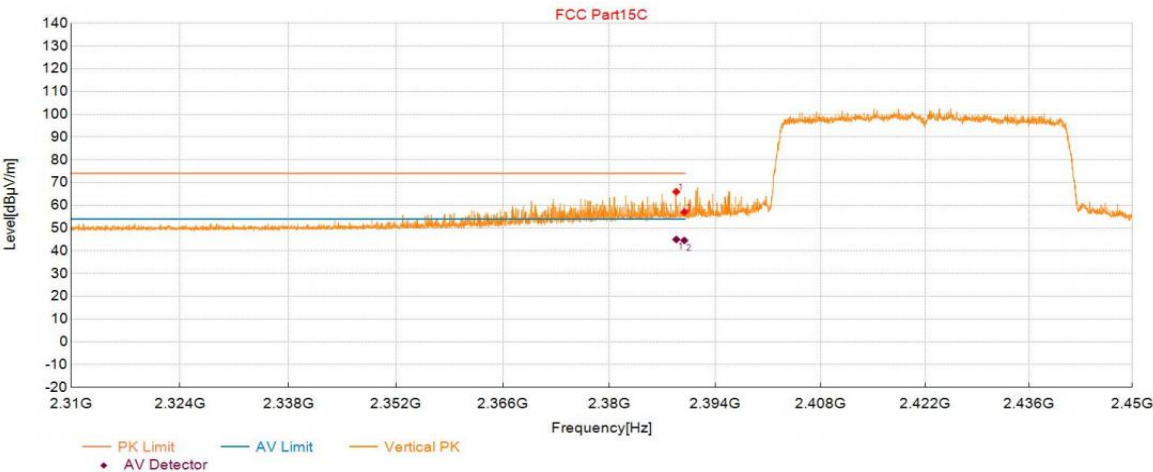

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.84	59.42	65.97	6.55	74.00	8.03	150	216	Vertical
2	2389.90	50.50	57.05	6.55	74.00	16.95	150	201	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.84	38.46	6.55	45.01	54.00	8.99	150	216	Vertical
2	2389.90	38.02	6.55	44.57	54.00	9.43	150	201	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11AX40_MCS0_2452	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:32:00

Test Graph

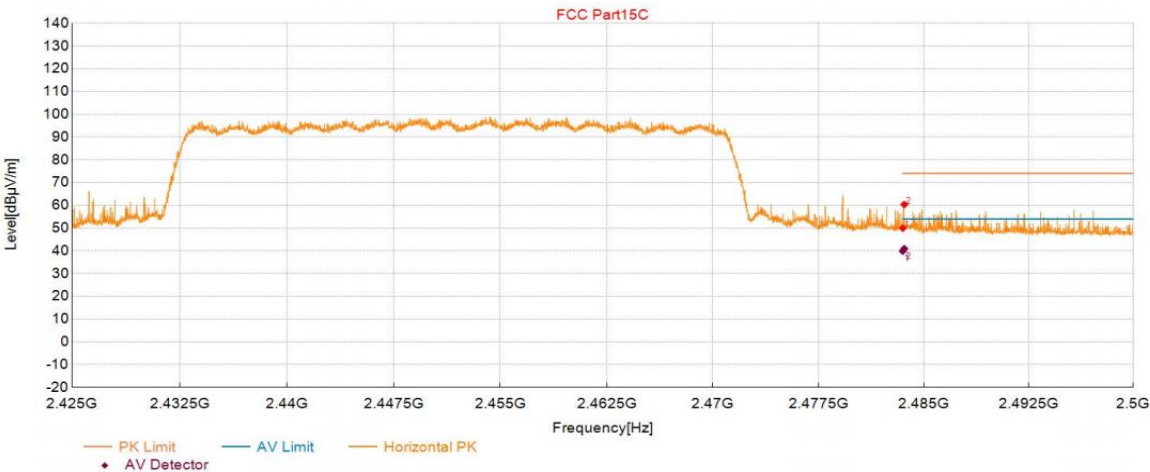

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	42.91	49.95	7.04	74.00	24.05	150	111	Horizontal
2	2483.62	53.31	60.35	7.04	74.00	13.65	150	105	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	32.83	7.04	39.87	54.00	14.13	150	111	Horizontal
2	2483.62	33.91	7.04	40.95	54.00	13.05	150	105	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	11AX40_MCS0_2452	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 17:32:41

Test Graph

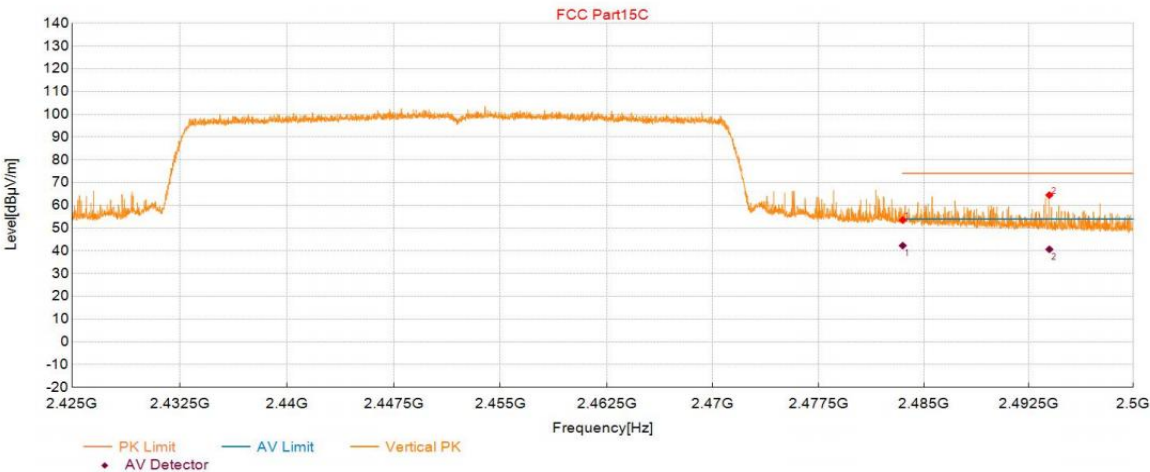

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	46.50	53.54	7.04	74.00	20.46	150	220	Vertical
2	2493.98	57.40	64.49	7.09	74.00	9.51	150	160	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	35.26	7.04	42.30	54.00	11.70	150	220	Vertical
2	2493.98	33.58	7.09	40.67	54.00	13.33	150	160	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 19:04:03

Test Graph

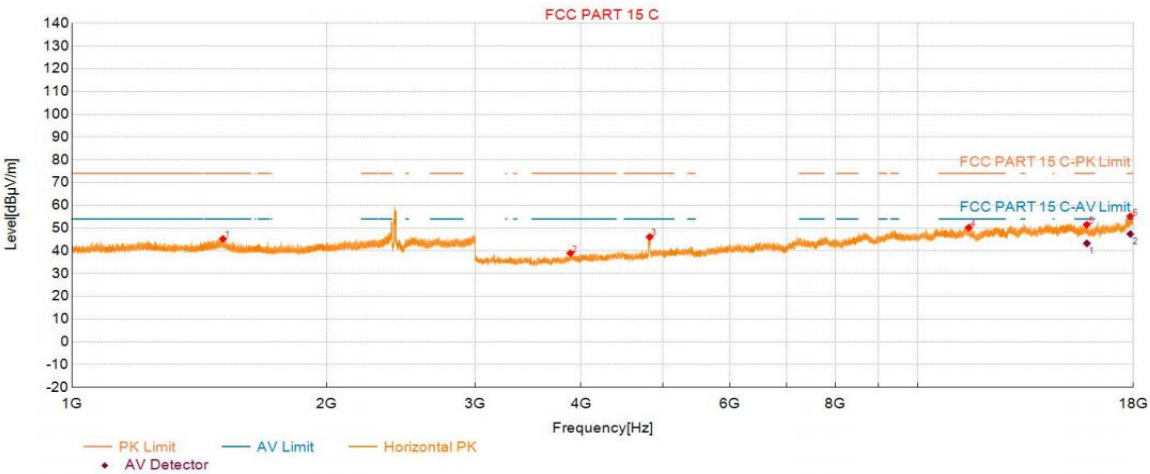

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1508.93	41.19	45.28	4.09	74.00	28.72	150	138	Horizontal
2	3885.79	50.92	38.96	-11.96	74.00	35.04	150	303	Horizontal
3	4822.59	54.26	46.12	-8.14	74.00	27.88	150	134	Horizontal
4	11500.18	42.16	50.23	8.07	74.00	23.77	150	349	Horizontal
5	15859.39	38.64	51.52	12.88	74.00	22.48	150	95	Horizontal
6	17856.74	36.69	55.18	18.49	74.00	18.82	150	1	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15859.39	30.40	12.88	43.28	54.00	10.72	150	95	Horizontal
2	17856.74	28.91	18.49	47.40	54.00	6.60	150	1	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 19:05:25

Test Graph

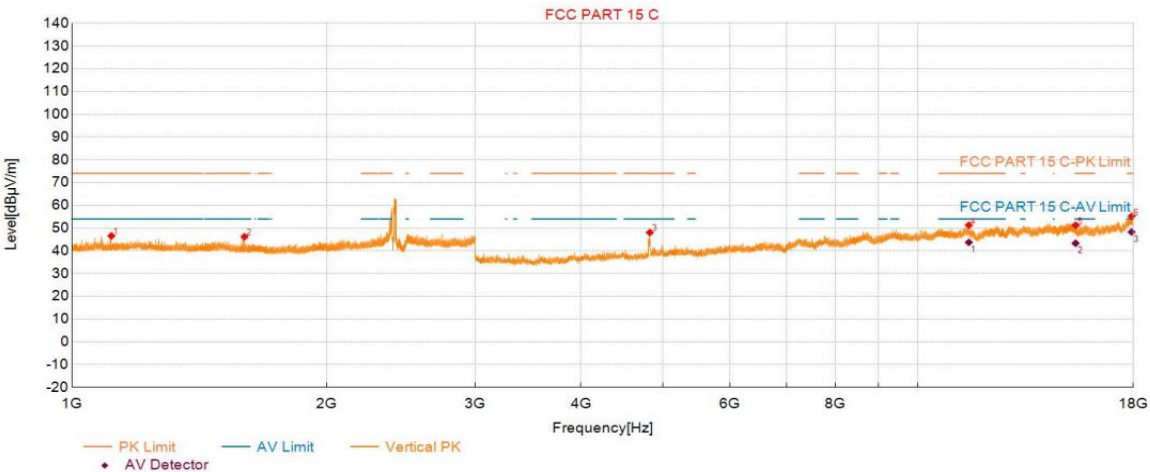

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1113.51	44.23	46.60	2.37	74.00	27.40	150	212	Vertical
2	1599.83	42.16	46.19	4.03	74.00	27.81	150	243	Vertical
3	4824.09	56.19	48.06	-8.13	74.00	25.94	150	208	Vertical
4	11501.68	43.19	51.26	8.07	74.00	22.74	150	334	Vertical
5	15380.12	37.63	51.24	13.61	74.00	22.76	150	177	Vertical
6	17913.75	36.66	55.17	18.51	74.00	18.83	150	67	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	11501.68	35.67	8.07	43.74	54.00	10.26	150	334	Vertical
2	15380.12	29.71	13.61	43.32	54.00	10.68	150	177	Vertical
3	17913.75	29.80	18.51	48.31	54.00	5.69	150	67	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2442	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 19:07:10

Test Graph

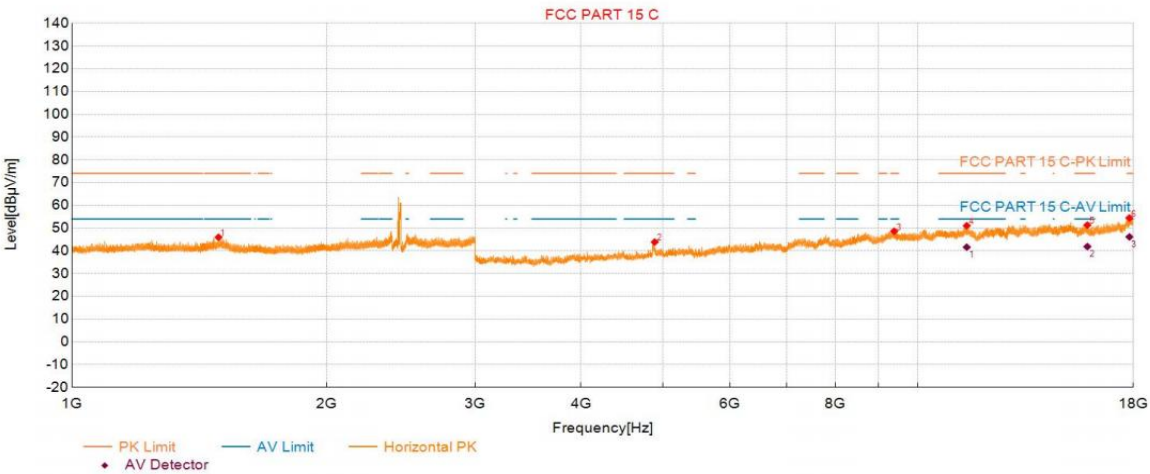

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1490.62	41.90	45.97	4.07	74.00	28.03	150	358	Horizontal
2	4889.34	51.41	43.88	-7.53	74.00	30.12	150	138	Horizontal
3	9383.57	42.03	48.64	6.61	74.00	25.36	150	108	Horizontal
4	11435.67	42.75	51.04	8.29	74.00	22.96	150	0	Horizontal
5	15884.89	38.42	51.34	12.92	74.00	22.66	150	295	Horizontal
6	17807.99	36.15	54.45	18.30	74.00	19.55	150	85	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	11435.67	33.32	8.29	41.61	54.00	12.39	150	0	Horizontal
2	15884.89	28.96	12.92	41.88	54.00	12.12	150	295	Horizontal
3	17807.99	27.85	18.30	46.15	54.00	7.85	150	85	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2442	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 19:08:31

Test Graph

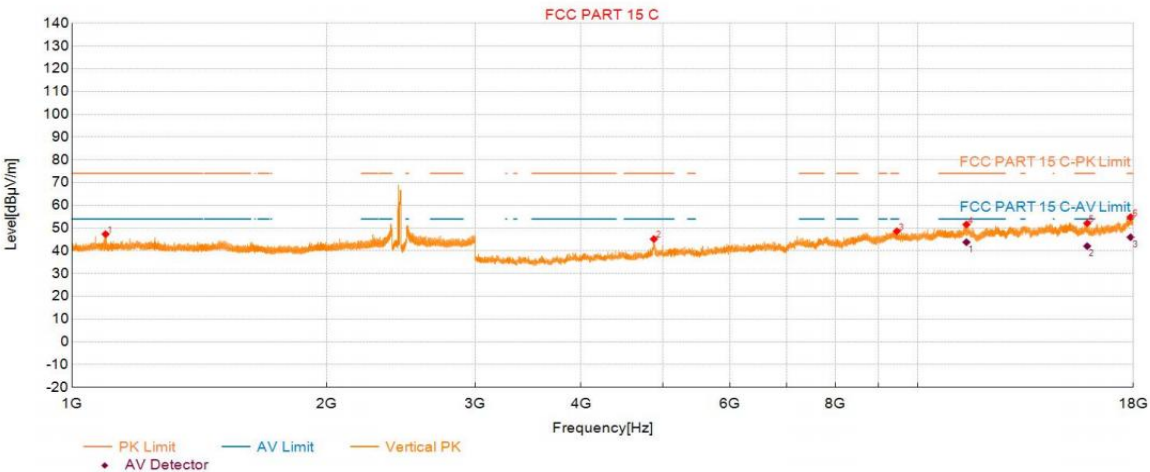

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1096.00	45.11	47.34	2.23	74.00	26.66	150	176	Vertical
2	4878.09	52.81	45.18	-7.63	74.00	28.82	150	212	Vertical
3	9453.32	42.48	48.63	6.15	74.00	25.37	150	29	Vertical
4	11425.17	43.26	51.58	8.32	74.00	22.42	150	168	Vertical
5	15874.39	39.22	52.13	12.91	74.00	21.87	150	0	Vertical
6	17864.24	36.30	54.82	18.52	74.00	19.18	150	67	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	11425.17	35.47	8.32	43.79	54.00	10.21	150	168	Vertical
2	15874.39	29.15	12.91	42.06	54.00	11.94	150	0	Vertical
3	17864.24	27.46	18.52	45.98	54.00	8.02	150	67	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 19:14:06

Test Graph

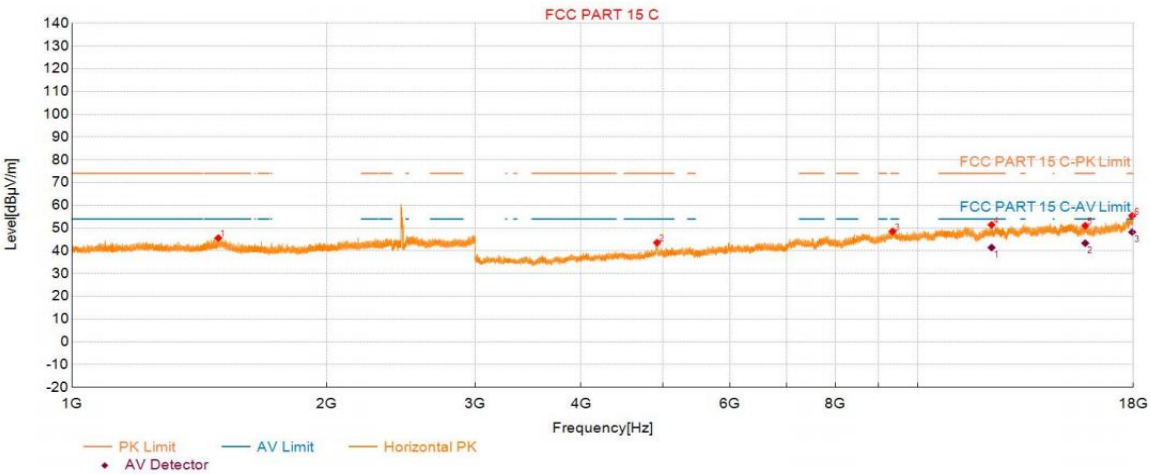

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1489.92	41.55	45.61	4.06	74.00	28.39	150	250	Horizontal
2	4920.10	50.95	43.59	-7.36	74.00	30.41	150	136	Horizontal
3	9344.57	42.31	48.56	6.25	74.00	25.44	150	252	Horizontal
4	12235.96	42.32	51.44	9.12	74.00	22.56	150	229	Horizontal
5	15790.39	38.27	51.06	12.79	74.00	22.94	150	74	Horizontal
6	17944.50	37.22	55.44	18.22	74.00	18.56	150	166	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	12235.96	32.31	9.12	41.43	54.00	12.57	150	229	Horizontal
2	15790.39	30.56	12.79	43.35	54.00	10.65	150	74	Horizontal
3	17944.50	30.04	18.22	48.26	54.00	5.74	150	166	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 19:15:28

Test Graph

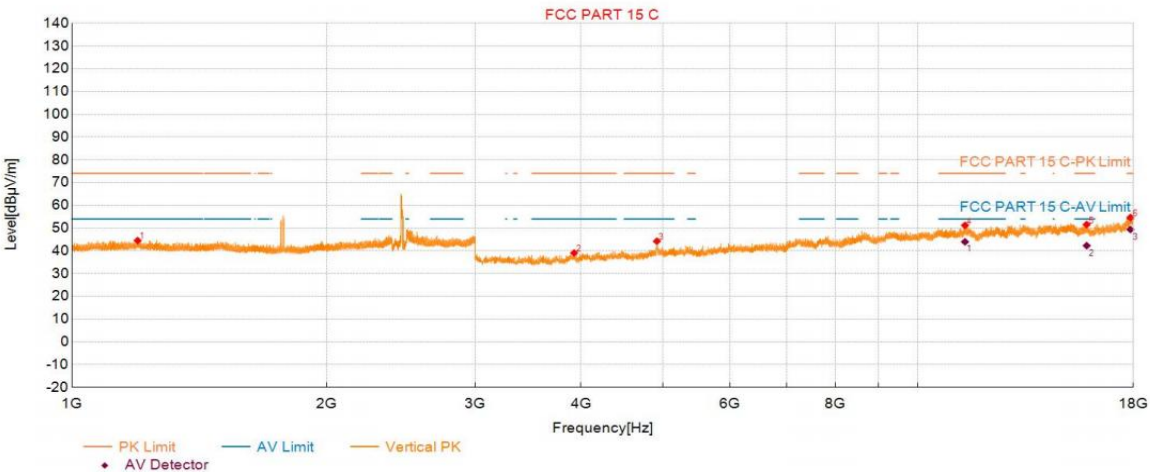

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1195.91	41.15	44.52	3.37	74.00	29.48	150	130	Vertical
2	3925.55	50.76	39.07	-11.69	74.00	34.93	150	0	Vertical
3	4917.85	51.59	44.22	-7.37	74.00	29.78	150	215	Vertical
4	11380.92	42.97	51.20	8.23	74.00	22.80	150	0	Vertical
5	15852.64	38.72	51.58	12.86	74.00	22.42	150	192	Vertical
6	17856.74	36.17	54.66	18.49	74.00	19.34	150	302	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	11380.92	35.75	8.23	43.98	54.00	10.02	150	0	Vertical
2	15852.64	29.42	12.86	42.28	54.00	11.72	150	192	Vertical
3	17856.74	30.89	18.49	49.38	54.00	4.62	150	302	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-18 19:26:15

Test Graph

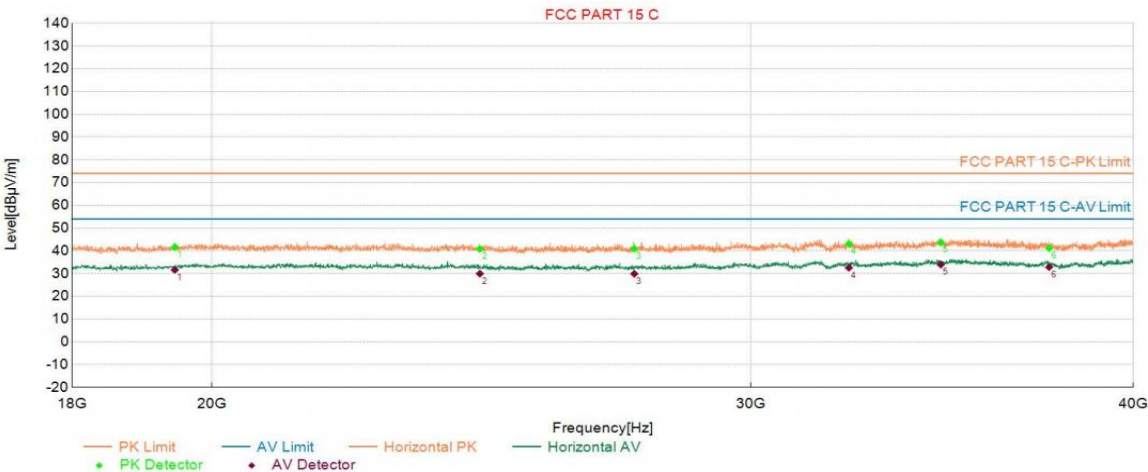

PK Final Data List								
NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19447.890	38.48	41.65	74.00	32.35	150	280	Horizontal
2	24464.893	33.54	40.78	74.00	33.22	150	40	Horizontal
3	27479.496	37.54	40.99	74.00	33.01	150	60	Horizontal
4	32294.059	33.5	43.04	74.00	30.96	150	360	Horizontal
5	34604.521	33.17	43.65	74.00	30.35	150	200	Horizontal
6	37544.309	31.91	41.20	74.00	32.80	150	30	Horizontal

AV Final Data List								
NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19447.890	28.44	31.61	54.00	22.39	150	280	Horizontal
2	24464.893	22.73	29.97	54.00	24.03	150	40	Horizontal
3	27479.496	26.45	29.90	54.00	24.10	150	60	Horizontal
4	32294.059	22.99	32.53	54.00	21.47	150	360	Horizontal
5	34604.521	23.46	33.94	54.00	20.06	150	200	Horizontal
6	37544.309	23.54	32.83	54.00	21.17	150	30	Horizontal


Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value
Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-18 19:26:33

Test Graph

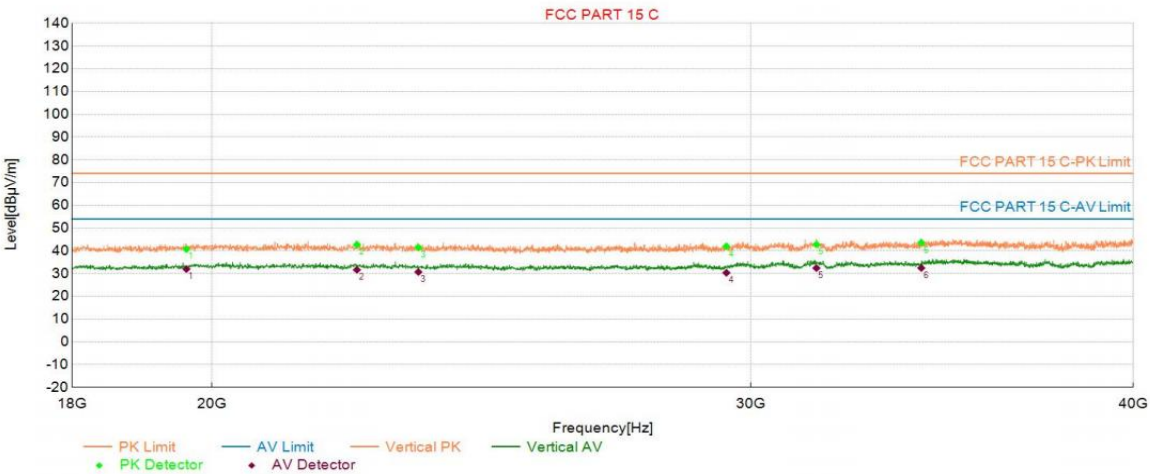

PK Final Data List								
NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19619.524	37.35	40.76	74.00	33.24	150	170	Vertical
2	22304.061	36.83	42.70	74.00	31.30	150	0	Vertical
3	23360.272	34.65	41.44	74.00	32.56	150	120	Vertical
4	29451.090	34.24	41.99	74.00	32.01	150	290	Vertical
5	31515.103	32.79	42.79	74.00	31.21	150	250	Vertical
6	34102.821	34.24	43.59	74.00	30.41	150	340	Vertical

AV Final Data List								
NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19619.524	28.59	32.00	54.00	22.00	150	170	Vertical
2	22304.061	25.77	31.64	54.00	22.36	150	0	Vertical
3	23360.272	23.91	30.70	54.00	23.30	150	120	Vertical
4	29451.090	22.60	30.35	54.00	23.65	150	290	Vertical
5	31515.103	22.42	32.42	54.00	21.58	150	250	Vertical
6	34102.821	23.09	32.44	54.00	21.56	150	340	Vertical


Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value
Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11B_CCK_1M_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 15:44:08

Test Graph

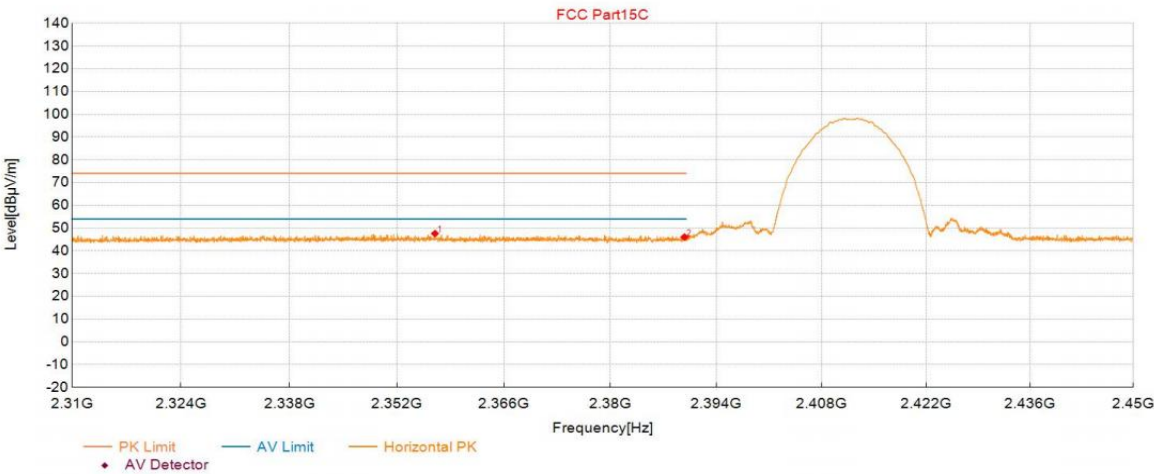

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2356.97	41.04	47.59	6.55	74.00	26.41	150	7	Horizontal
2	2389.79	39.52	46.07	6.55	74.00	27.93	150	342	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11B_CCK_1M_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 15:44:49

Test Graph

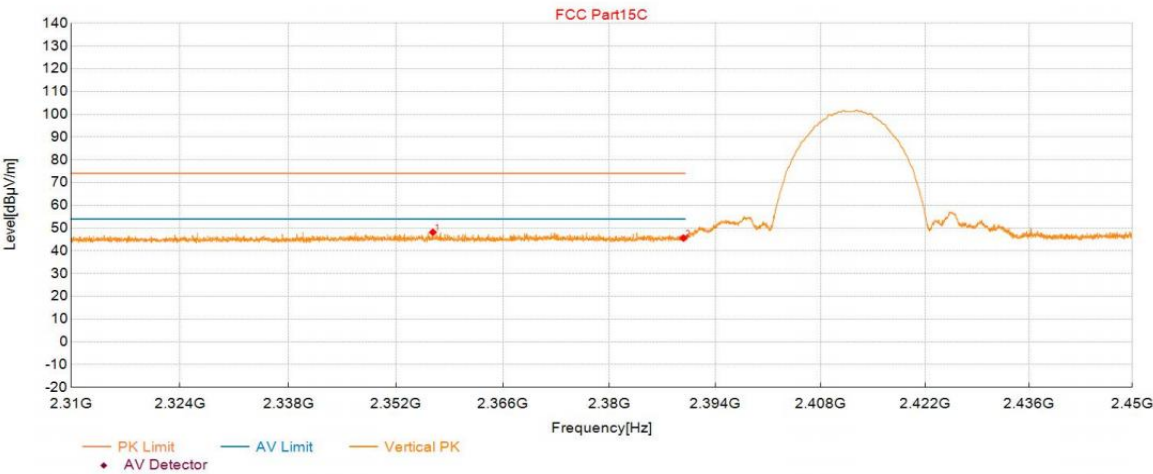

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2356.83	41.62	48.17	6.55	74.00	25.83	150	258	Vertical
2	2389.79	39.06	45.61	6.55	74.00	28.39	150	242	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11B_CCK_1M_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 15:48:57

Test Graph

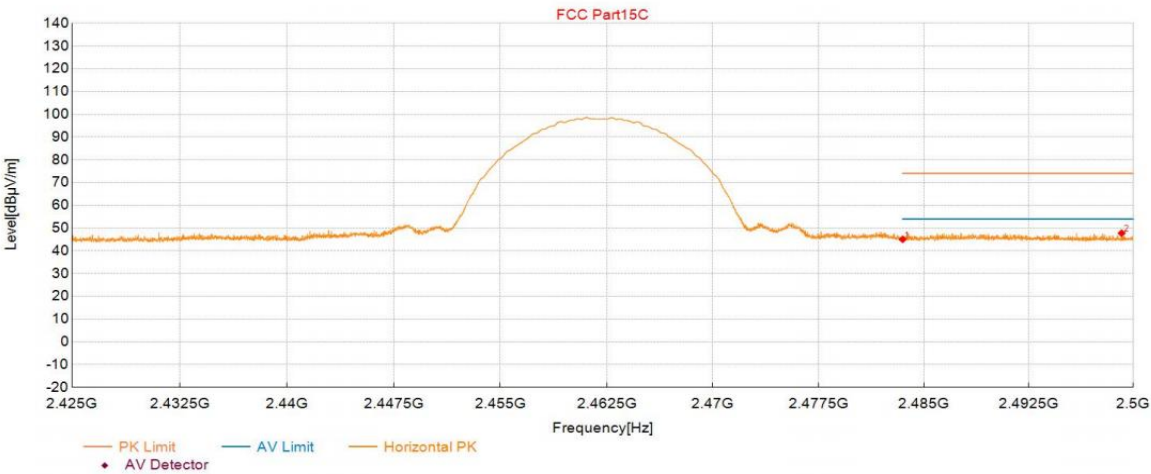

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	38.02	45.06	7.04	74.00	28.94	150	206	Horizontal
2	2499.16	40.65	47.78	7.13	74.00	26.22	150	126	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11B_CCK_1M_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 15:49:38

Test Graph

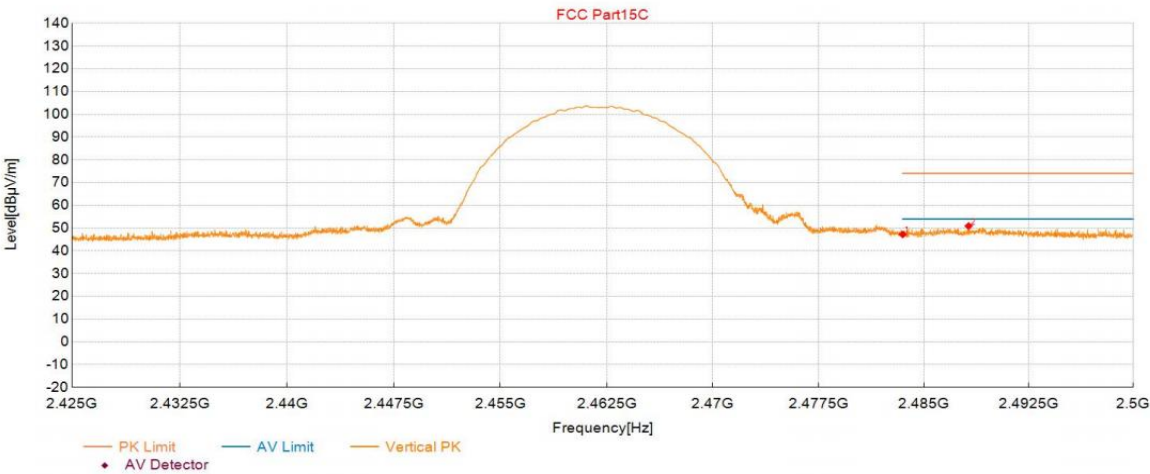

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	40.17	47.21	7.04	74.00	26.79	150	138	Vertical
2	2488.21	43.86	50.92	7.06	74.00	23.08	150	206	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11G_OFDM_6M_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 15:54:09

Test Graph

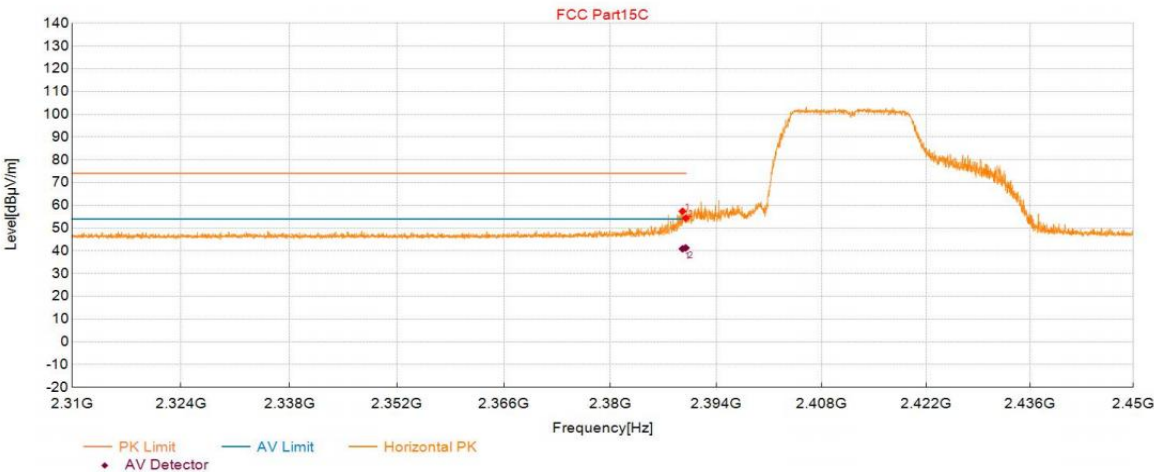

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.54	50.83	57.38	6.55	74.00	16.62	150	168	Horizontal
2	2389.96	47.83	54.38	6.55	74.00	19.62	150	200	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.54	34.36	6.55	40.91	54.00	13.09	150	168	Horizontal
2	2389.96	34.75	6.55	41.30	54.00	12.70	150	200	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11G_OFDM_6M_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 15:54:49

Test Graph

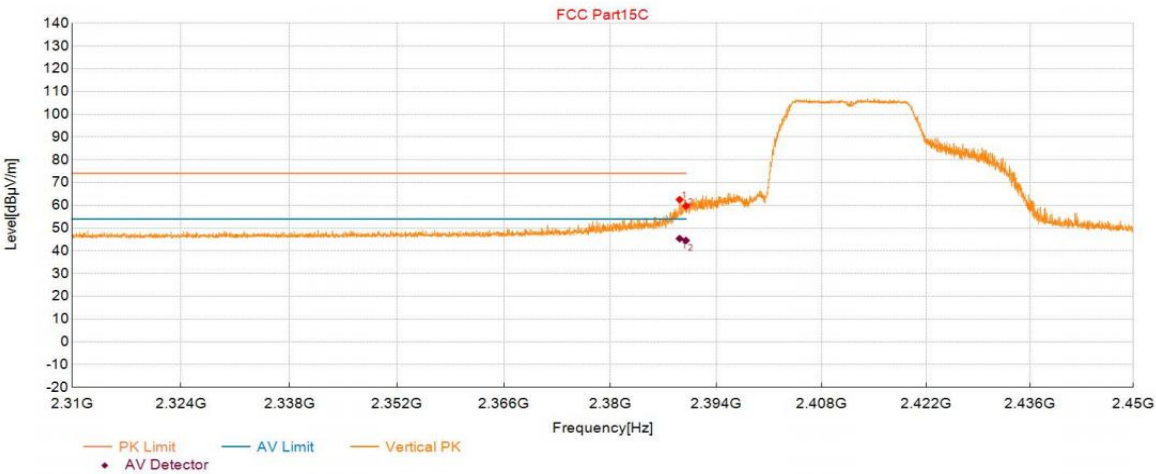

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.14	55.96	62.51	6.55	74.00	11.49	150	135	Vertical
2	2389.98	53.15	59.70	6.55	74.00	14.30	150	142	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.14	38.84	6.55	45.39	54.00	8.61	150	135	Vertical
2	2389.98	37.99	6.55	44.54	54.00	9.46	150	142	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11G_OFDM_6M_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 15:58:09

Test Graph

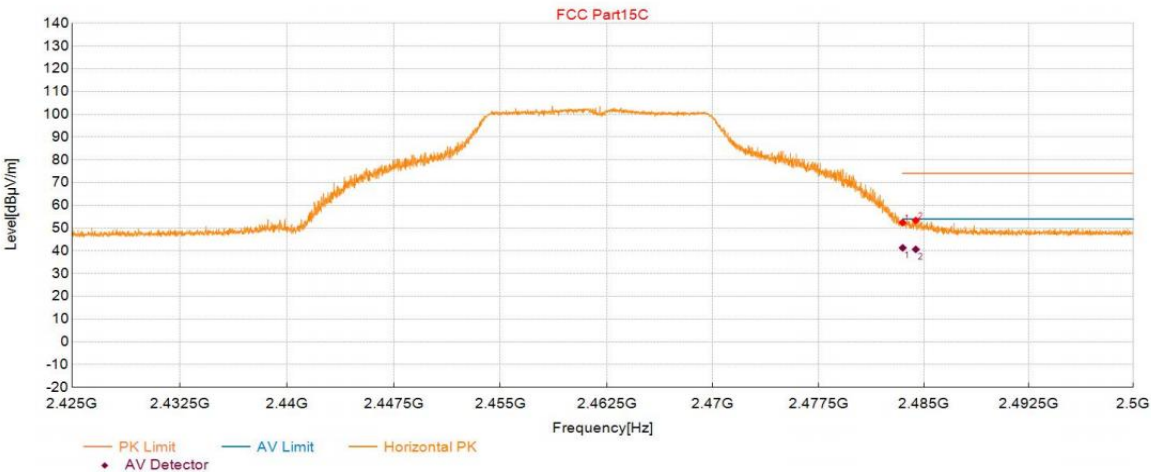

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	45.36	52.40	7.04	74.00	21.60	150	202	Horizontal
2	2484.44	46.32	53.36	7.04	74.00	20.64	150	260	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	34.27	7.04	41.31	54.00	12.69	150	202	Horizontal
2	2484.44	33.62	7.04	40.66	54.00	13.34	150	260	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11G_OFDM_6M_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 15:58:50

Test Graph

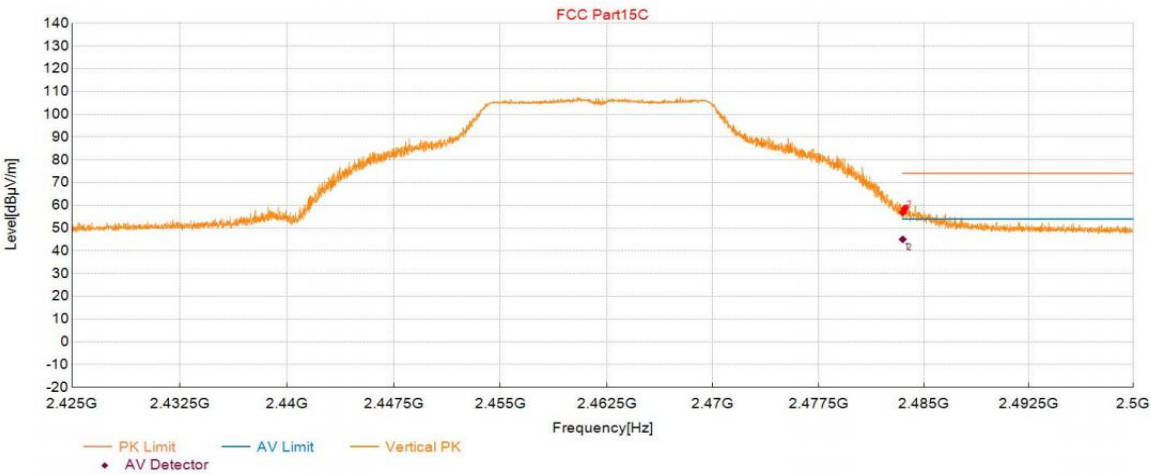

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	49.85	56.89	7.04	74.00	17.11	150	132	Vertical
2	2483.66	51.60	58.64	7.04	74.00	15.36	150	127	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	38.02	7.04	45.06	54.00	8.94	150	132	Vertical
2	2483.66	37.88	7.04	44.92	54.00	9.08	150	127	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 16:04:13

Test Graph

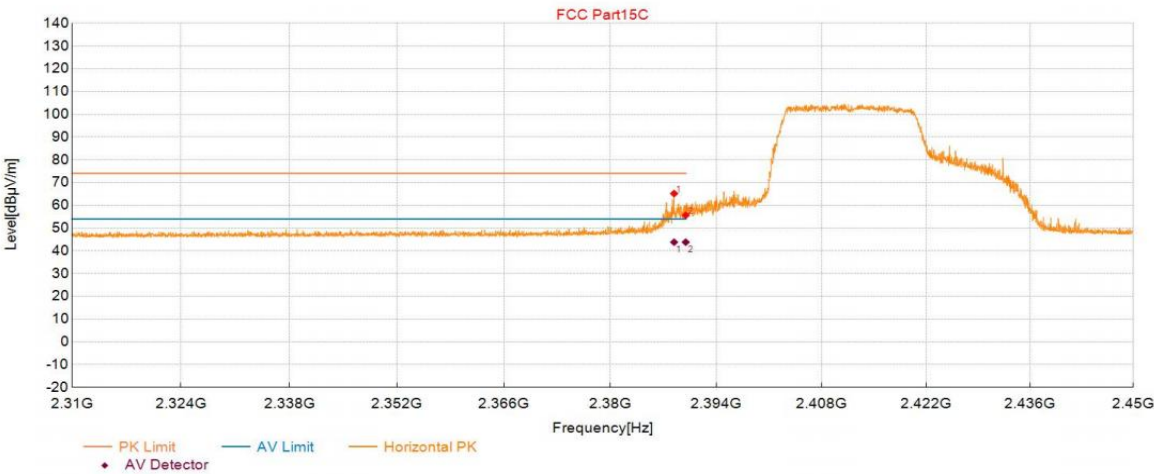

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.42	58.62	65.17	6.55	74.00	8.83	150	169	Horizontal
2	2389.96	49.10	55.65	6.55	74.00	18.35	150	174	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.42	37.27	6.55	43.82	54.00	10.18	150	169	Horizontal
2	2389.96	37.25	6.55	43.80	54.00	10.20	150	174	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2412	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 16:04:53

Test Graph

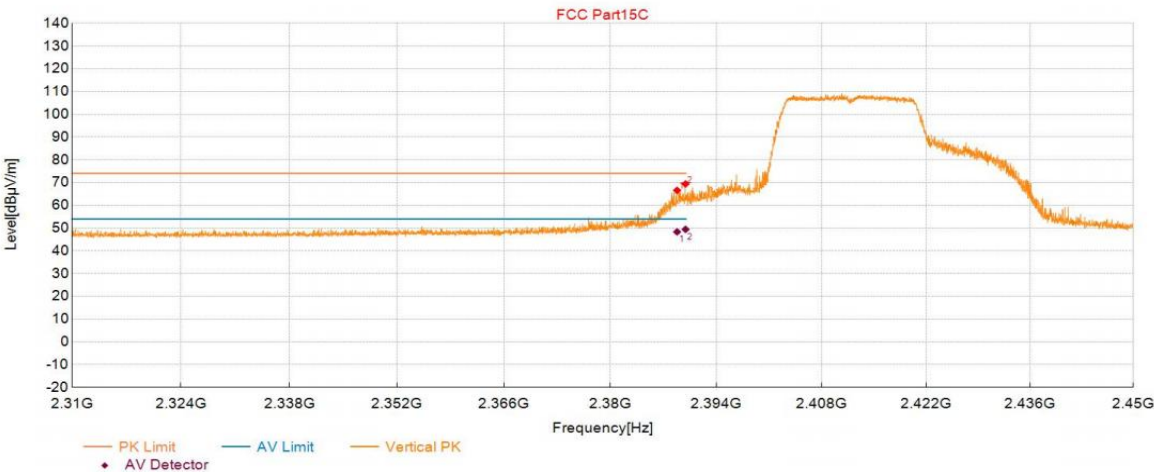

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.81	60.03	66.58	6.55	74.00	7.42	150	133	Vertical
2	2389.93	62.85	69.40	6.55	74.00	4.60	150	133	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.81	41.80	6.55	48.35	54.00	5.65	150	133	Vertical
2	2389.93	42.90	6.55	49.45	54.00	4.55	150	133	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 16:09:43

Test Graph

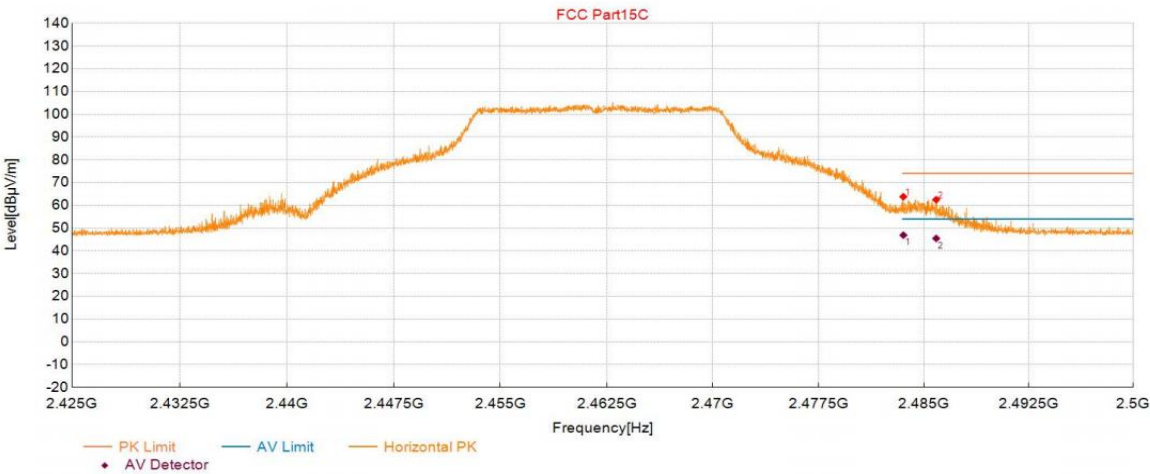

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.56	56.76	63.80	7.04	74.00	10.20	150	207	Horizontal
2	2485.90	55.46	62.51	7.05	74.00	11.49	150	207	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.56	39.86	7.04	46.90	54.00	7.10	150	207	Horizontal
2	2485.90	38.41	7.05	45.46	54.00	8.54	150	207	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N20_MCS8_2462	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 16:10:23

Test Graph

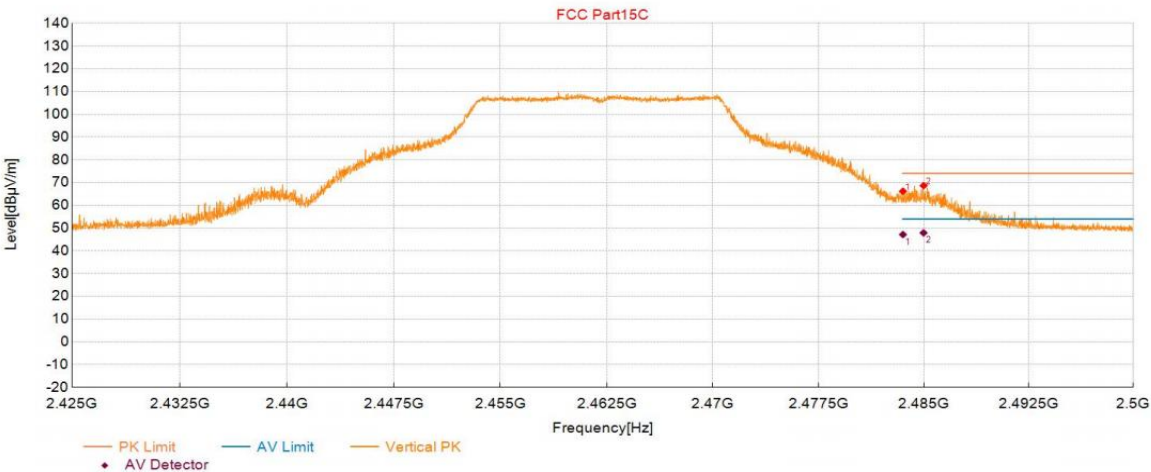

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.53	59.16	66.20	7.04	74.00	7.80	150	118	Vertical
2	2485.00	61.62	68.66	7.04	74.00	5.34	150	118	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.53	40.12	7.04	47.16	54.00	6.84	150	118	Vertical
2	2485.00	40.87	7.04	47.91	54.00	6.09	150	118	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N40_MCS8_2422	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 16:16:39

Test Graph

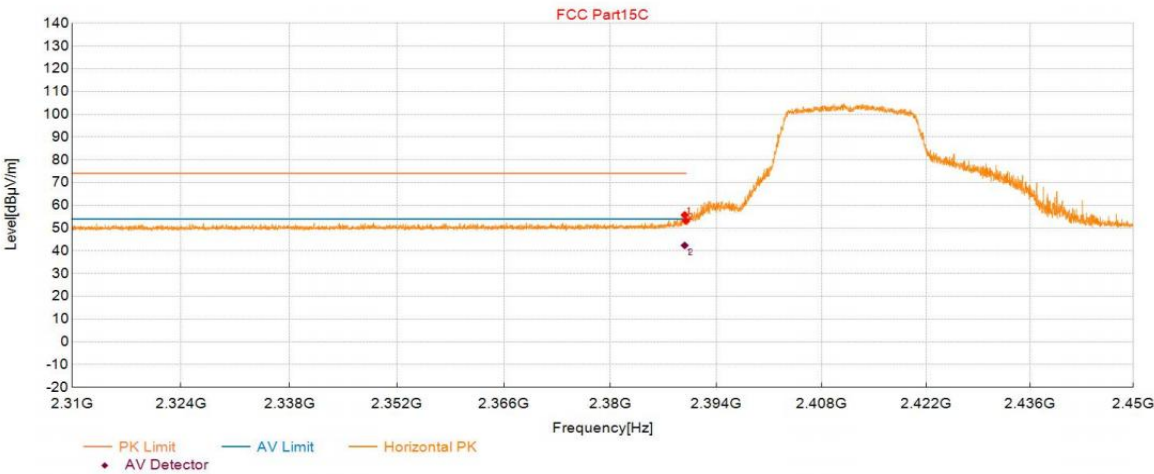

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.82	49.26	55.81	6.55	74.00	18.19	150	172	Horizontal
2	2389.98	46.61	53.16	6.55	74.00	20.84	150	172	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.82	35.84	6.55	42.39	54.00	11.61	150	172	Horizontal
2	2389.98	35.88	6.55	42.43	54.00	11.57	150	172	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N40_MCS8_2422	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 16:17:19

Test Graph

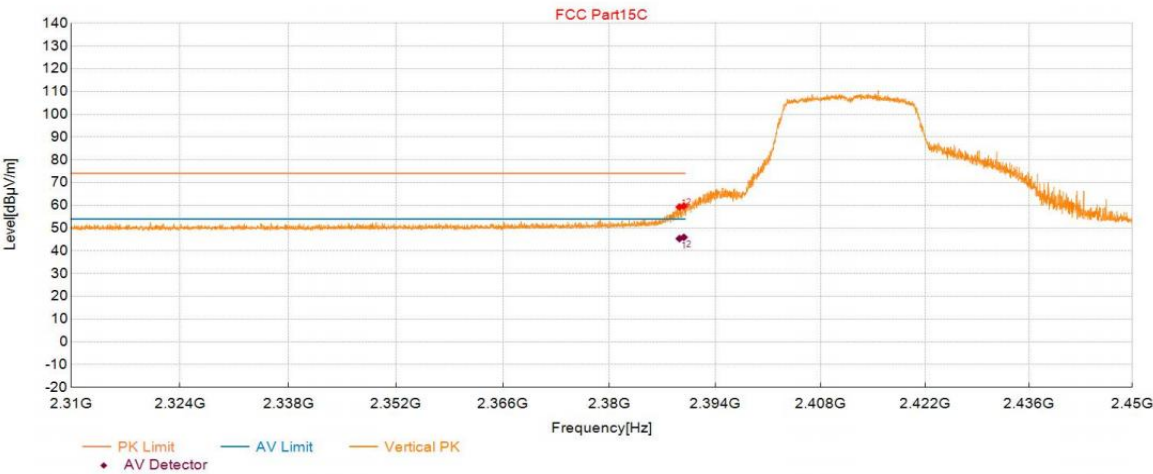

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.26	52.73	59.28	6.55	74.00	14.72	150	130	Vertical
2	2389.84	53.14	59.69	6.55	74.00	14.31	150	130	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.26	38.83	6.55	45.38	54.00	8.62	150	130	Vertical
2	2389.84	39.42	6.55	45.97	54.00	8.03	150	130	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	11N40_MCS8_2452	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 16:20:41

Test Graph

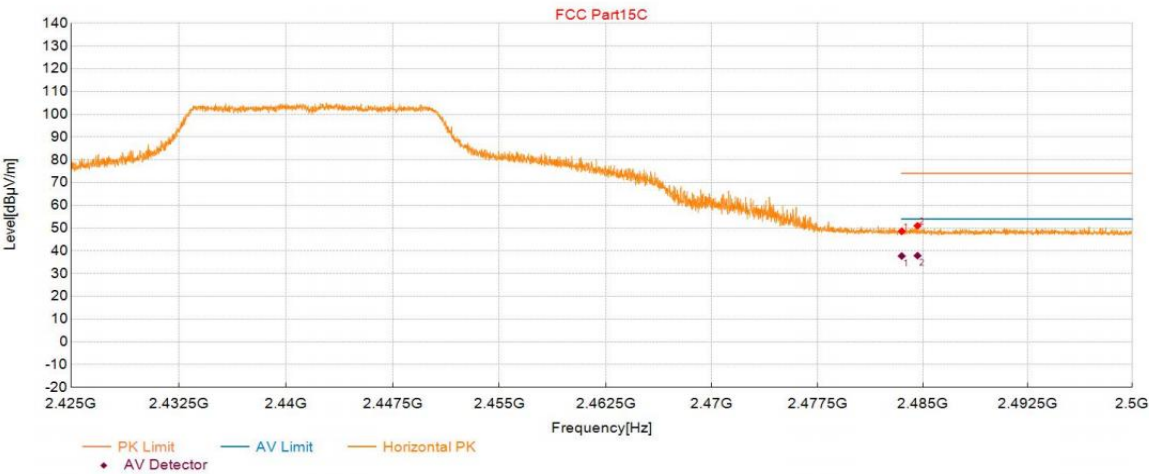

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	41.57	48.61	7.04	74.00	25.39	150	217	Horizontal
2	2484.64	43.97	51.01	7.04	74.00	22.99	150	142	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	30.69	7.04	37.73	54.00	16.27	150	217	Horizontal
2	2484.64	30.84	7.04	37.88	54.00	16.12	150	142	Horizontal

Note1: Level=Reading+Factor, Margin=Limit - Level