


Test Report

Project Information			
EUT:	Tablet		
Customer:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 21:16:23

Test Graph

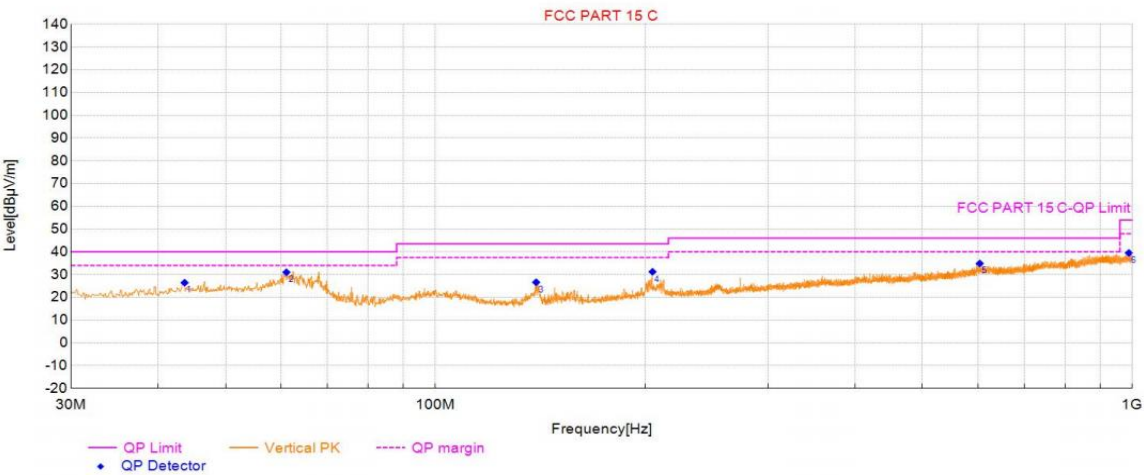

Final Data List										
NO.	Freq. (MHz)	QP Reading (dBµV/m)	Factor (dB)	QP Value (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	43.68	5.94	20.50	26.44	40.00	13.56	100	289	Vertical	PASS
2	61.14	11.11	19.93	31.04	40.00	8.96	100	6	Vertical	PASS
3	139.52	10.47	16.15	26.62	43.50	16.88	100	224	Vertical	PASS
4	204.91	11.14	20.10	31.24	43.50	12.26	100	334	Vertical	PASS
5	604.01	5.09	29.79	34.88	46.00	11.12	100	6	Vertical	PASS
6	988.55	4.45	35.05	39.50	54.00	14.50	100	238	Vertical	PASS

Note: Margin=QP Limit - QP Value, QP Value=Reading + Factor


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 11:58:01

Test Graph

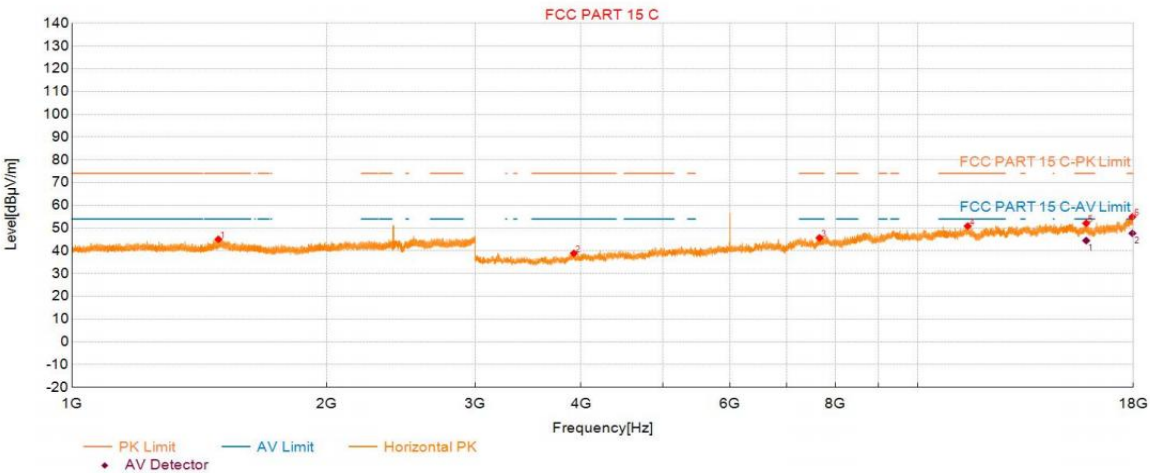

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1490.42	41.01	45.08	4.07	74.00	28.92	150	5	Horizontal
2	3922.55	50.61	38.90	-11.71	74.00	35.10	150	358	Horizontal
3	7657.73	44.65	45.68	1.03	74.00	28.32	150	61	Horizontal
4	11465.67	42.69	50.88	8.19	74.00	23.12	150	257	Horizontal
5	15830.14	39.29	52.12	12.83	74.00	21.88	150	4	Horizontal
6	17955.00	36.85	54.97	18.12	74.00	19.03	150	106	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15830.14	31.68	12.83	44.51	54.00	9.49	150	4	Horizontal
2	17955.00	29.58	18.12	47.70	54.00	6.30	150	106	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 11:59:24

Test Graph

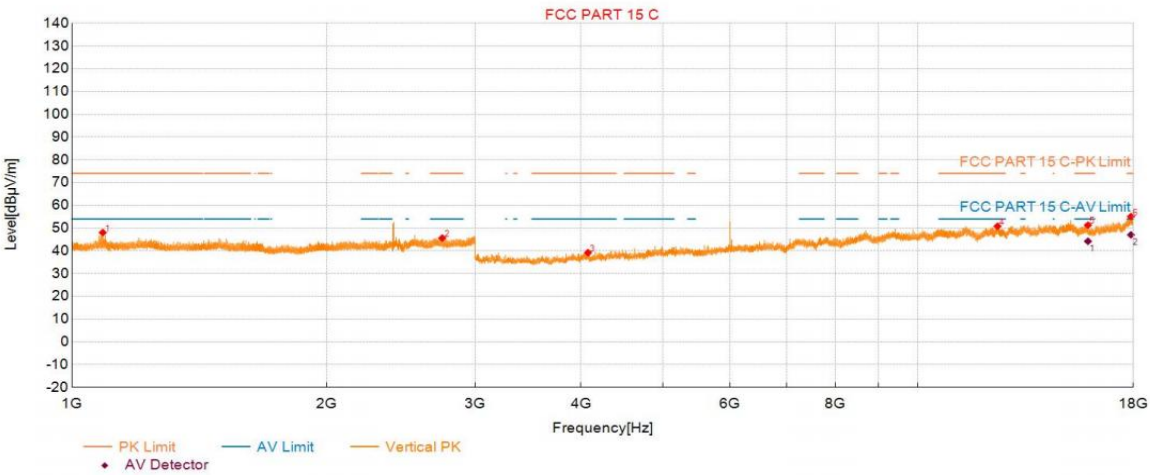

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1087.70	45.88	48.03	2.15	74.00	25.97	150	72	Vertical
2	2740.89	37.17	45.60	8.43	74.00	28.40	150	89	Vertical
3	4076.30	50.17	39.20	-10.97	74.00	34.80	150	212	Vertical
4	12436.22	42.17	50.83	8.66	74.00	23.17	150	349	Vertical
5	15908.15	38.43	51.31	12.88	74.00	22.69	150	251	Vertical
6	17883.74	36.47	55.06	18.59	74.00	18.94	150	118	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15908.15	31.33	12.88	44.21	54.00	9.79	150	251	Vertical
2	17883.74	28.45	18.59	47.04	54.00	6.96	150	118	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2441	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 12:02:29

Test Graph

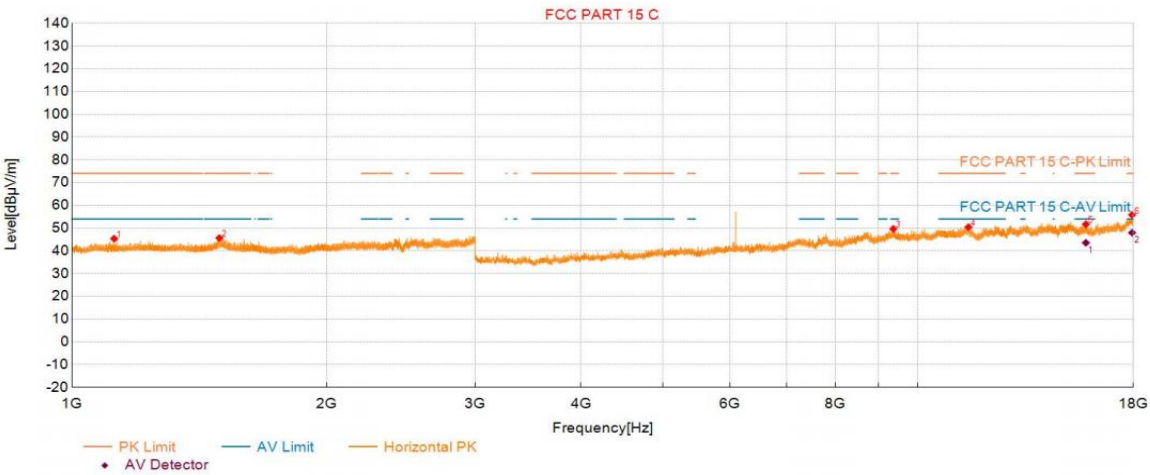

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1121.91	42.93	45.36	2.43	74.00	28.64	150	161	Horizontal
2	1494.02	41.59	45.65	4.06	74.00	28.35	150	254	Horizontal
3	9363.32	43.25	49.68	6.43	74.00	24.32	150	3	Horizontal
4	11489.67	42.32	50.42	8.10	74.00	23.58	150	1	Horizontal
5	15818.14	38.89	51.70	12.81	74.00	22.30	150	24	Horizontal
6	17938.50	37.55	55.83	18.28	74.00	18.17	150	304	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15818.14	30.73	12.81	43.54	54.00	10.46	150	24	Horizontal
2	17938.50	29.69	18.28	47.97	54.00	6.03	150	304	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2441	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 12:03:51

Test Graph

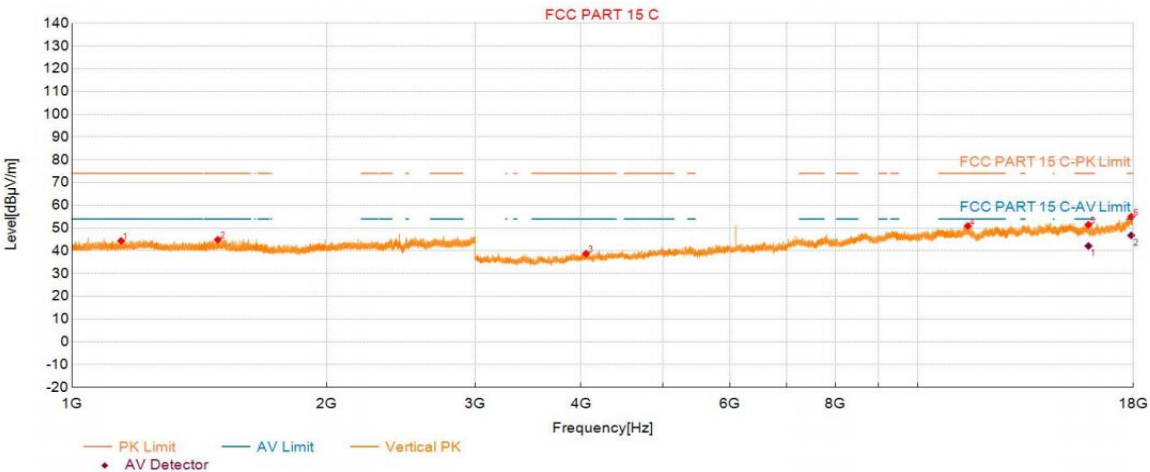

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1143.31	41.77	44.38	2.61	74.00	29.62	150	237	Vertical
2	1487.92	40.80	44.86	4.06	74.00	29.14	150	308	Vertical
3	4055.30	49.78	38.77	-11.01	74.00	35.23	150	183	Vertical
4	11469.42	42.76	50.93	8.17	74.00	23.07	150	26	Vertical
5	15929.15	38.77	51.48	12.71	74.00	22.52	150	208	Vertical
6	17897.24	36.39	55.03	18.64	74.00	18.97	150	100	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15929.15	29.40	12.71	42.11	54.00	11.89	150	208	Vertical
2	17897.24	28.14	18.64	46.78	54.00	7.22	150	100	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 12:06:28

Test Graph

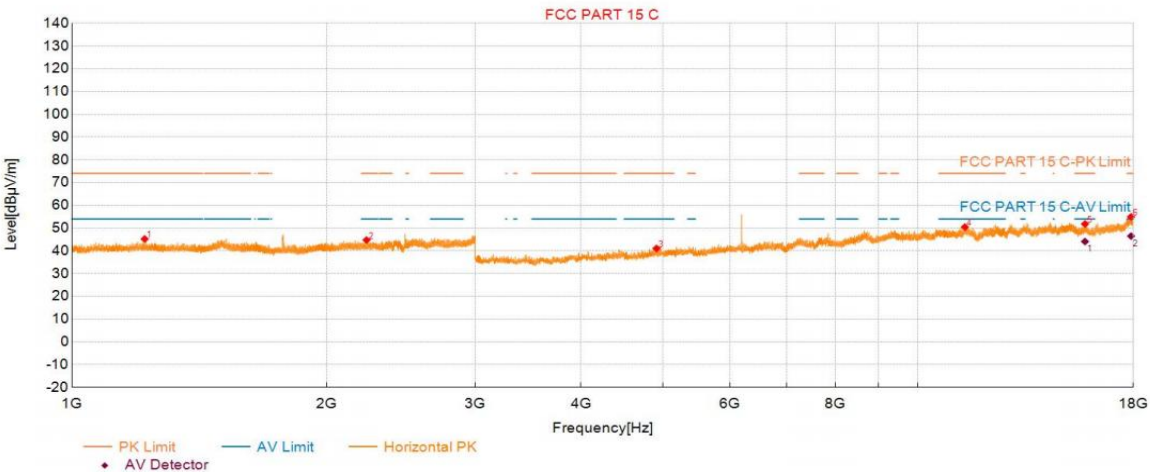

Suspected Data List

NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1219.21	41.77	45.23	3.46	74.00	28.77	150	235	Horizontal
2	2230.26	37.81	44.76	6.95	74.00	29.24	150	162	Horizontal
3	4913.35	48.43	41.05	-7.38	74.00	32.95	150	26	Horizontal
4	11377.17	42.25	50.45	8.20	74.00	23.55	150	268	Horizontal
5	15779.14	39.03	51.84	12.81	74.00	22.16	150	35	Horizontal
6	17885.99	36.36	54.96	18.60	74.00	19.04	150	350	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15779.14	31.29	12.81	44.10	54.00	9.90	150	35	Horizontal
2	17885.99	27.89	18.60	46.49	54.00	7.51	150	350	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 12:07:50

Test Graph

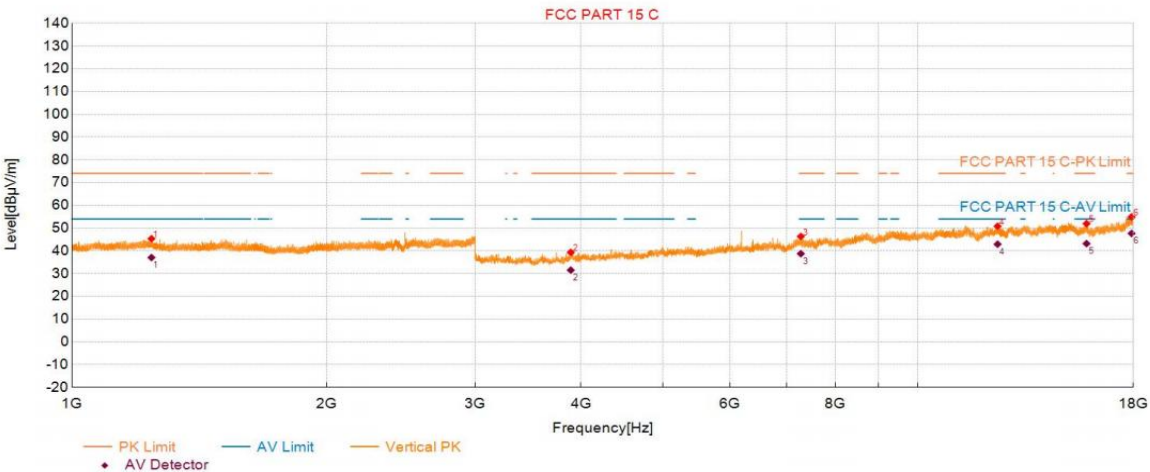

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1241.91	41.82	45.33	3.51	74.00	28.67	150	48	Vertical
2	3890.29	51.25	39.31	-11.94	74.00	34.69	150	5	Vertical
3	7278.21	45.25	46.32	1.07	74.00	27.68	150	164	Vertical
4	12437.72	42.15	50.82	8.67	74.00	23.18	150	202	Vertical
5	15845.14	39.11	51.97	12.86	74.00	22.03	150	9	Vertical
6	17913.00	36.40	54.93	18.53	74.00	19.07	150	164	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1241.91	33.54	3.51	37.05	54.00	16.95	150	48	Vertical
2	3890.29	43.46	-11.94	31.52	54.00	22.48	150	5	Vertical
3	7278.21	37.68	1.07	38.75	54.00	15.25	150	164	Vertical
4	12437.72	34.26	8.67	42.93	54.00	11.07	150	202	Vertical
5	15845.14	30.33	12.86	43.19	54.00	10.81	150	9	Vertical
6	17913.00	29.12	18.53	47.65	54.00	6.35	150	164	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:20:13

Test Graph

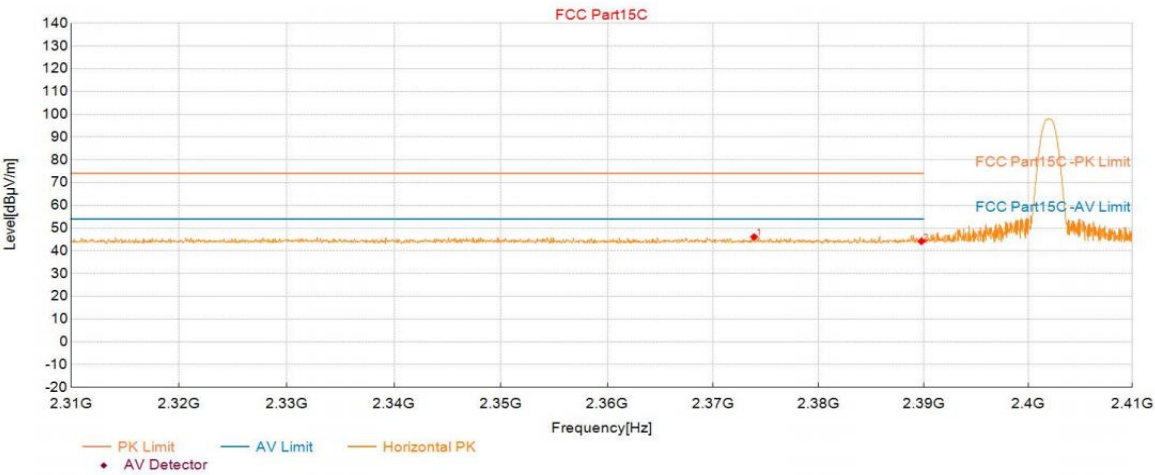

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2373.88	39.58	46.12	6.54	74.00	27.88	150	145	Horizontal
2	2389.79	37.60	44.15	6.55	74.00	29.85	150	110	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:20:53

Test Graph

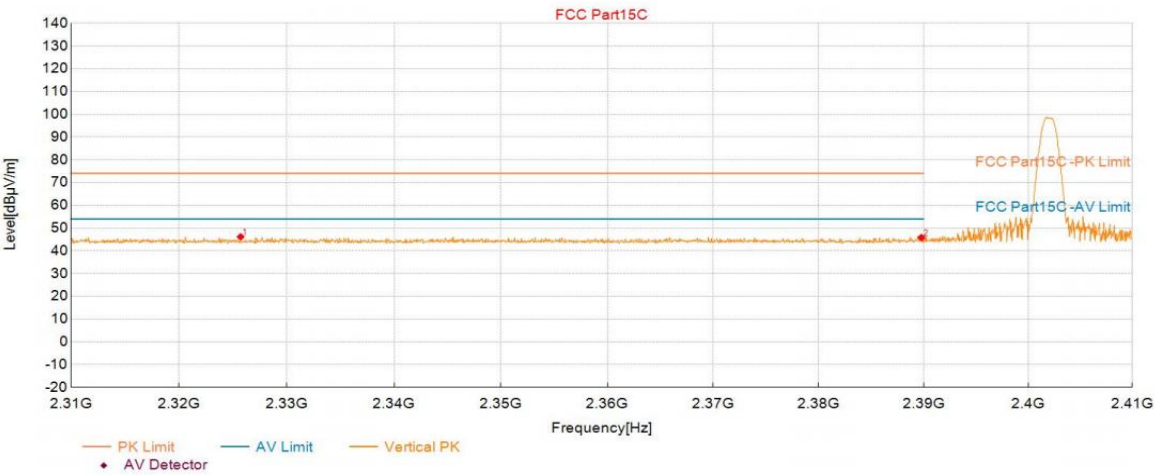

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2325.71	39.60	46.16	6.56	74.00	27.84	150	16	Vertical
2	2389.79	39.26	45.81	6.55	74.00	28.19	150	228	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:23:13

Test Graph

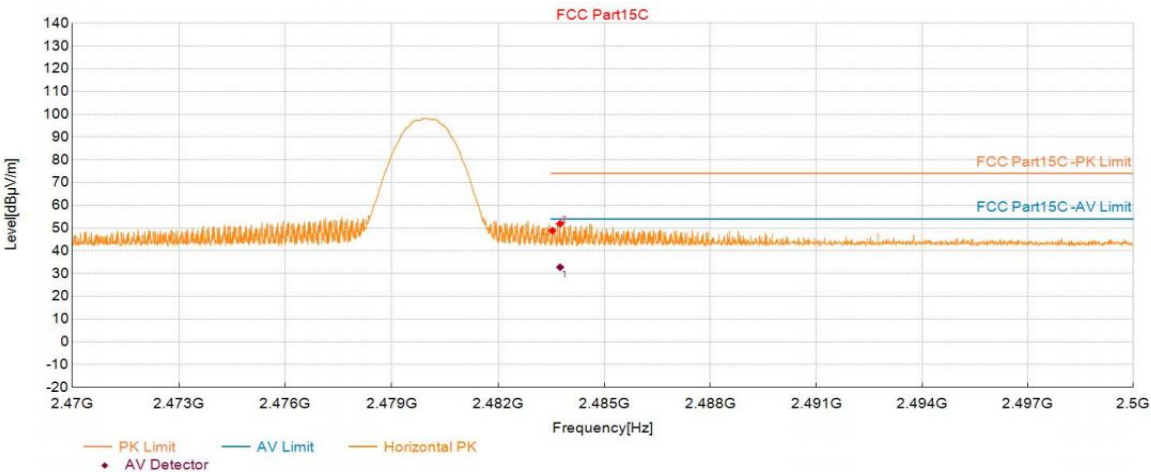

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.53	41.85	48.89	7.04	74.00	25.11	150	108	Horizontal
2	2483.75	44.88	51.92	7.04	74.00	22.08	150	229	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.75	25.76	7.04	32.80	54.00	21.20	150	229	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:23:54

Test Graph

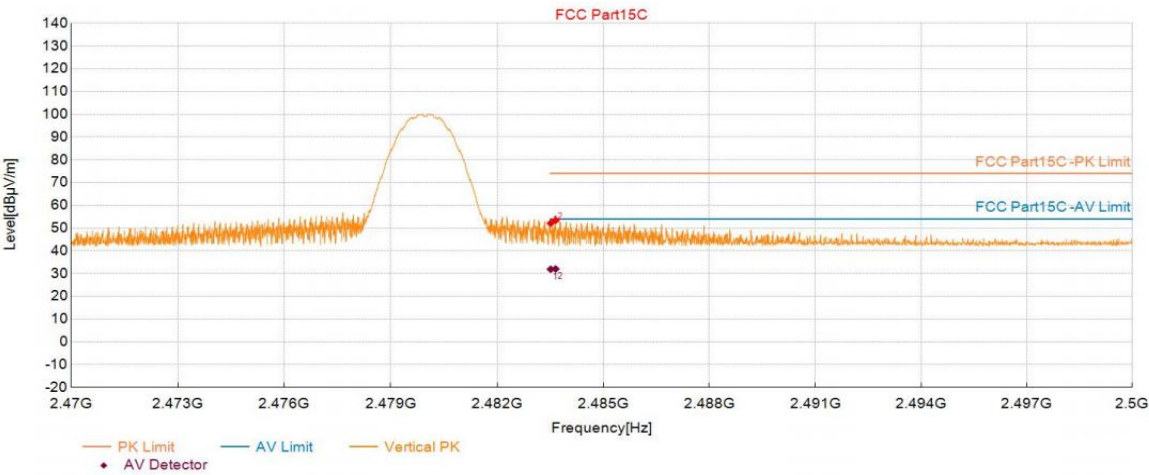

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	45.10	52.14	7.04	74.00	21.86	150	292	Vertical
2	2483.65	46.37	53.41	7.04	74.00	20.59	150	297	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	24.88	7.04	31.92	54.00	22.08	150	292	Vertical
2	2483.65	25.00	7.04	32.04	54.00	21.96	150	297	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	2DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:26:48

Test Graph

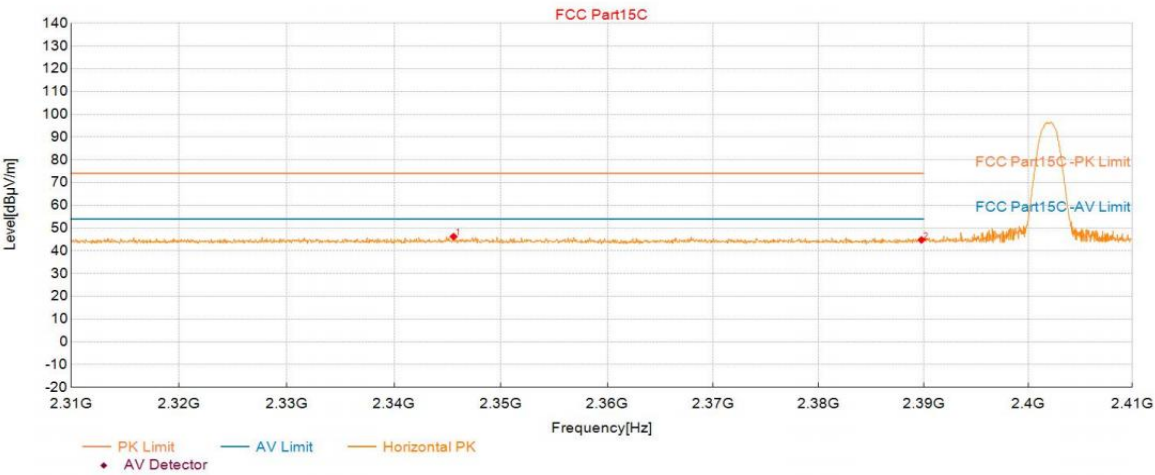

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2345.57	39.70	46.25	6.55	74.00	27.75	150	94	Horizontal
2	2389.79	38.24	44.79	6.55	74.00	29.21	150	149	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	2DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:27:27

Test Graph

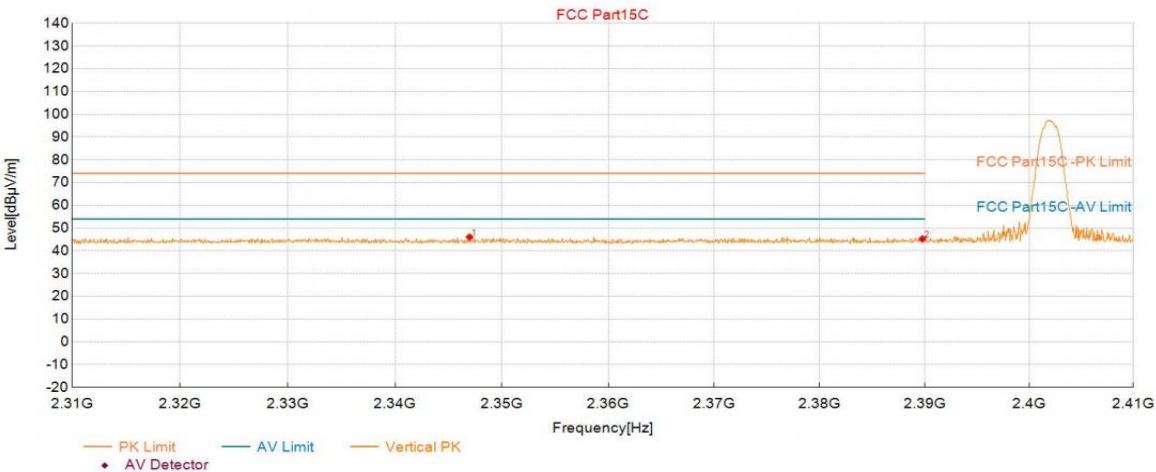

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2346.97	39.51	46.06	6.55	74.00	27.94	150	287	Vertical
2	2389.79	38.73	45.28	6.55	74.00	28.72	150	164	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	2DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:30:48

Test Graph

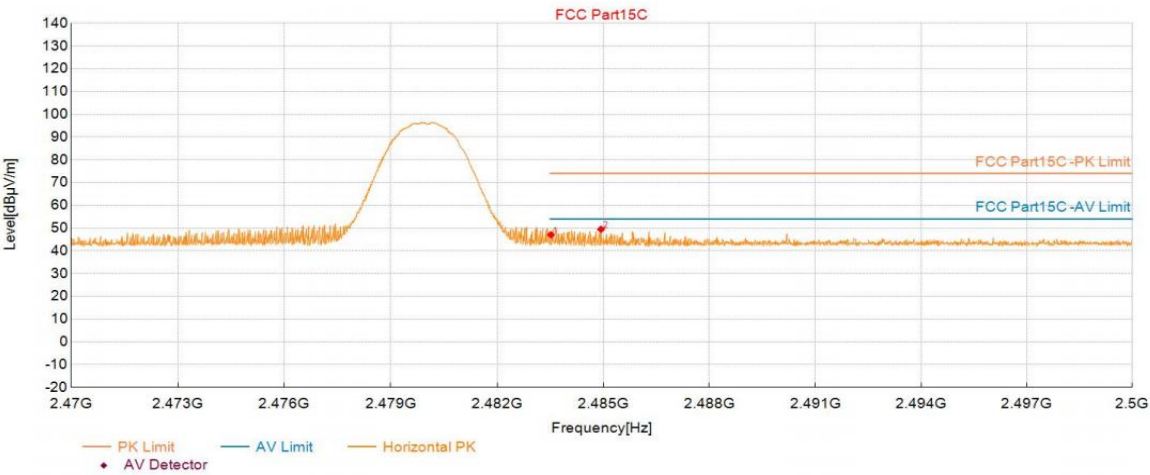

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.52	40.02	47.06	7.04	74.00	26.94	150	199	Horizontal
2	2484.93	42.44	49.48	7.04	74.00	24.52	150	228	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	2DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:31:28

Test Graph

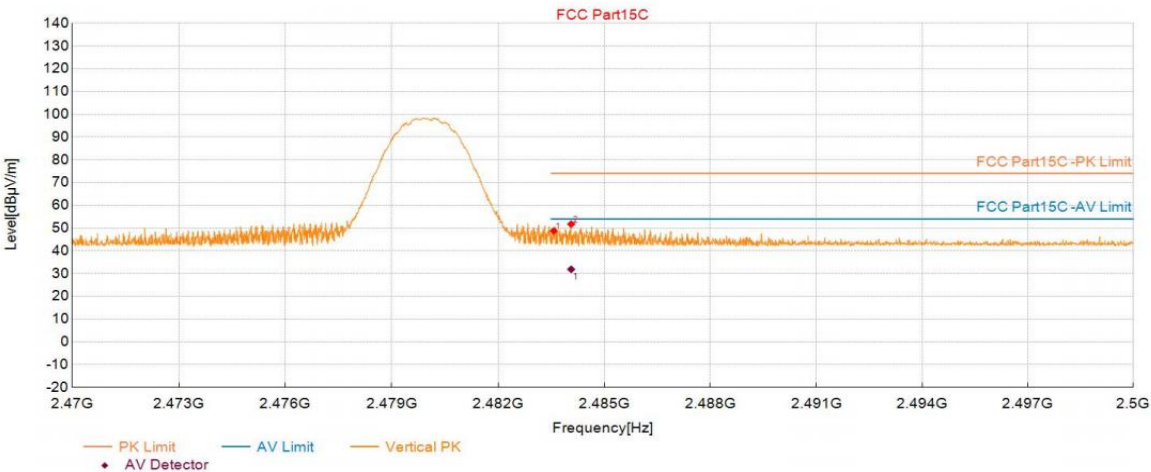

Suspected Data List

NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.57	41.75	48.79	7.04	74.00	25.21	150	225	Vertical
2	2484.06	44.71	51.75	7.04	74.00	22.25	150	299	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2484.06	24.83	7.04	31.87	54.00	22.13	150	299	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:07:43

Test Graph

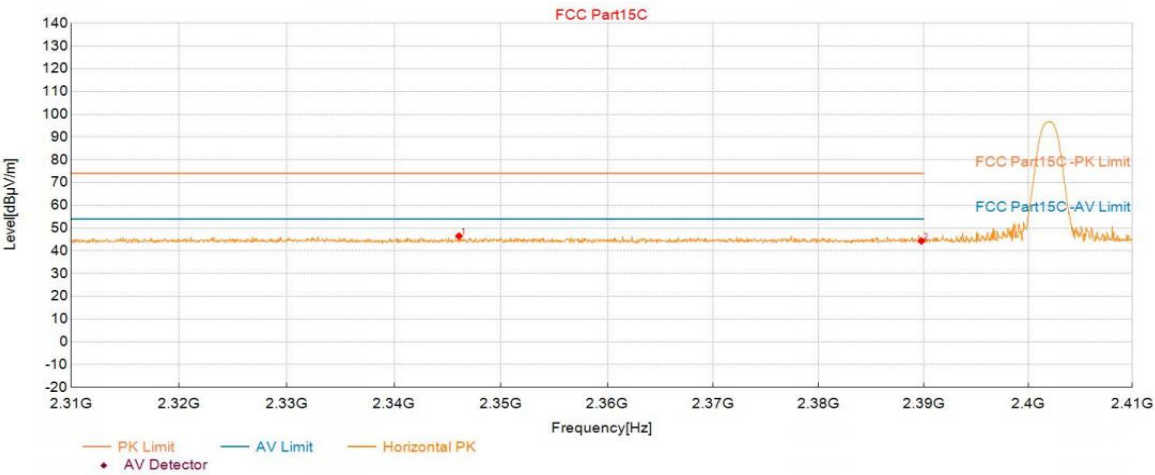

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2346.07	39.93	46.48	6.55	74.00	27.52	150	204	Horizontal
2	2389.79	37.77	44.32	6.55	74.00	29.68	150	42	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:08:22

Test Graph

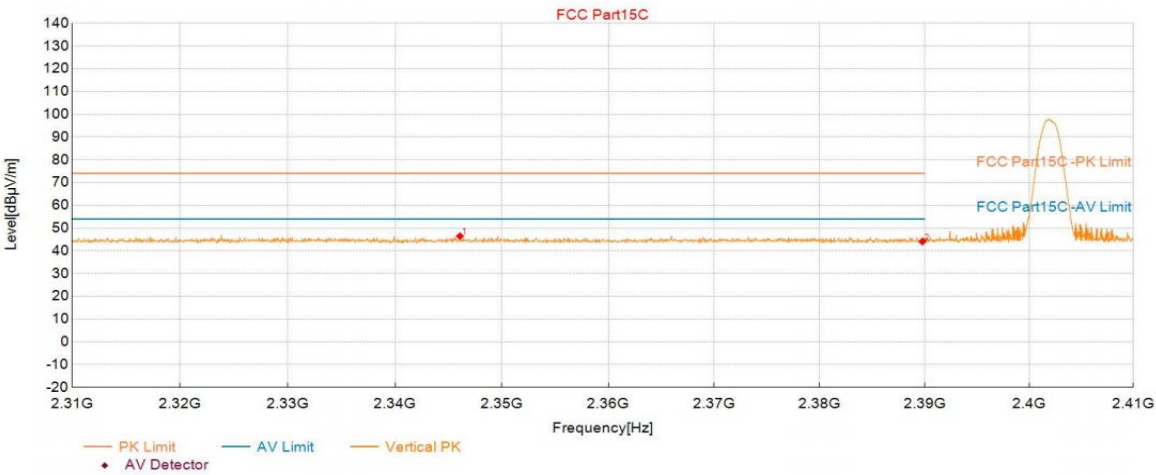

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2346.07	39.91	46.46	6.55	74.00	27.54	150	41	Vertical
2	2389.79	37.53	44.08	6.55	74.00	29.92	150	102	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:16:42

Test Graph

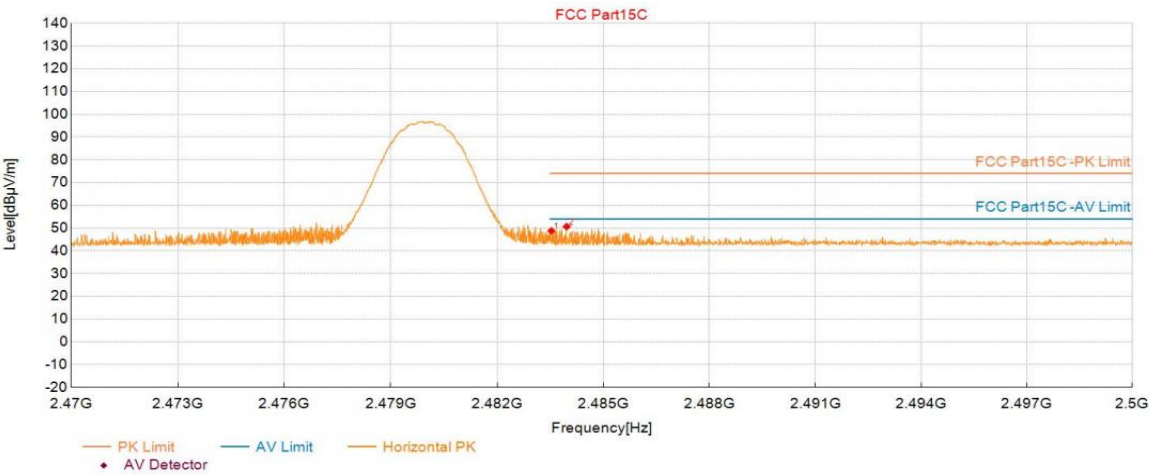

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.53	41.78	48.82	7.04	74.00	25.18	150	113	Horizontal
2	2483.96	43.61	50.65	7.04	74.00	23.35	150	242	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP10-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-09 14:17:22

Test Graph

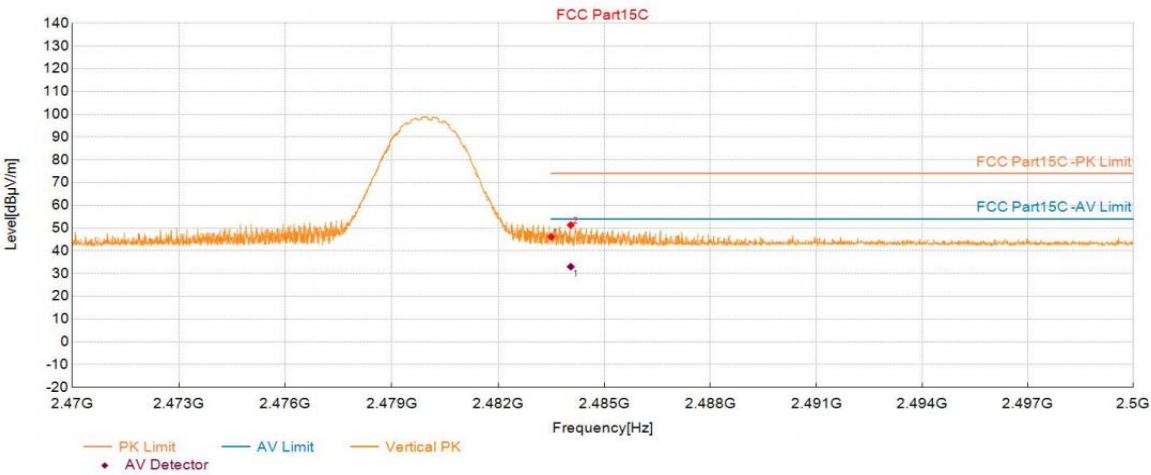

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	39.12	46.16	7.04	74.00	27.84	150	23	Vertical
2	2484.05	44.30	51.34	7.04	74.00	22.66	150	295	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2484.05	25.99	7.04	33.03	54.00	20.97	150	295	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:04:42

Test Graph

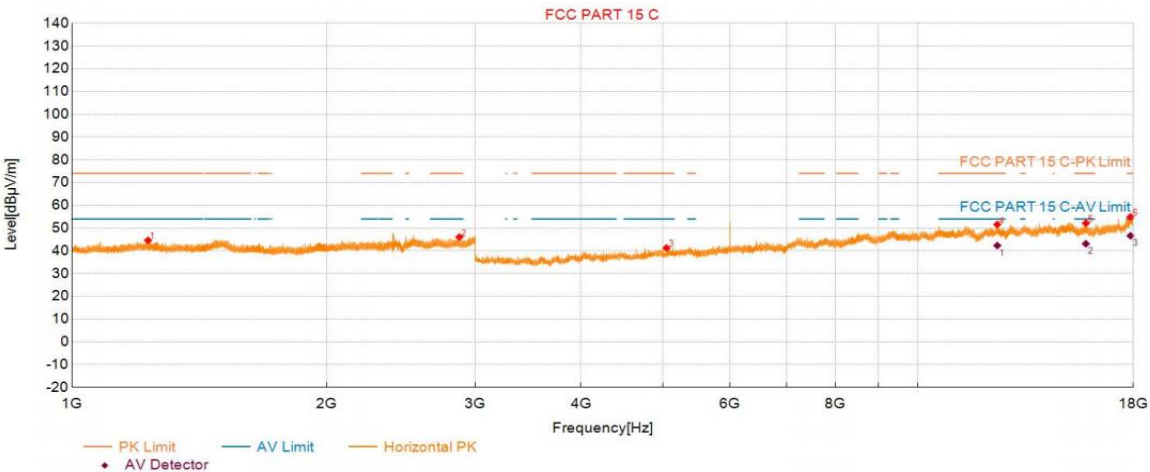

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1230.21	41.16	44.64	3.48	74.00	29.36	150	352	Horizontal
2	2871.89	37.05	46.06	9.01	74.00	27.94	150	163	Horizontal
3	5048.35	48.20	41.29	-6.91	74.00	32.71	150	77	Horizontal
4	12425.72	42.99	51.59	8.60	74.00	22.41	150	305	Horizontal
5	15816.64	39.36	52.17	12.81	74.00	21.83	150	0	Horizontal
6	17860.49	36.41	54.91	18.50	74.00	19.09	150	179	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	12425.72	33.73	8.60	42.33	54.00	11.67	150	305	Horizontal
2	15816.64	30.30	12.81	43.11	54.00	10.89	150	0	Horizontal
3	17860.49	28.13	18.50	46.63	54.00	7.37	150	179	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:06:04

Test Graph

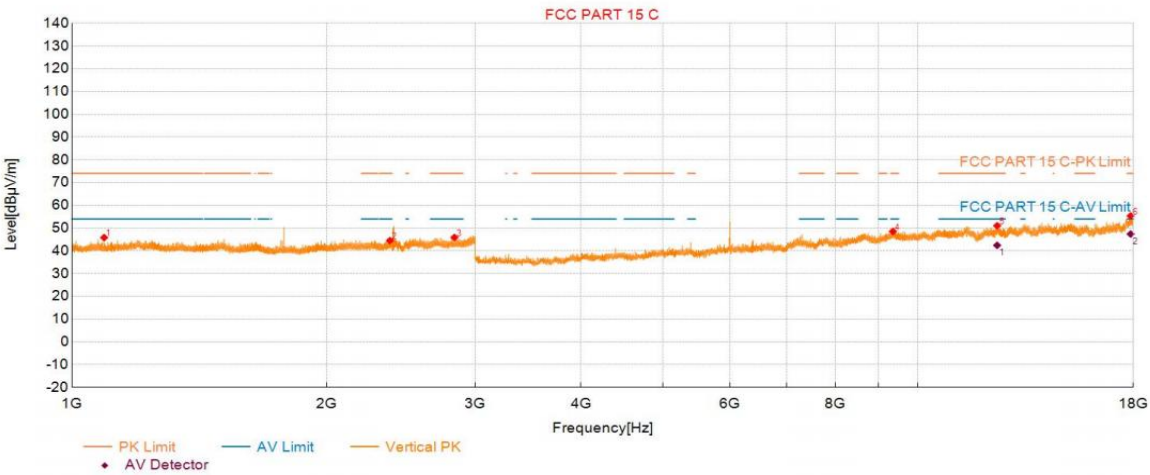

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1091.70	43.63	45.82	2.19	74.00	28.18	150	72	Vertical
2	2377.07	37.28	44.51	7.23	74.00	29.49	150	280	Vertical
3	2833.69	36.99	45.89	8.90	74.00	28.11	150	326	Vertical
4	9351.32	42.22	48.54	6.32	74.00	25.46	150	233	Vertical
5	12421.97	42.46	51.04	8.58	74.00	22.96	150	312	Vertical
6	17868.74	36.83	55.36	18.53	74.00	18.64	150	52	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	12421.97	33.86	8.58	42.44	54.00	11.56	150	312	Vertical
2	17868.74	28.87	18.53	47.40	54.00	6.60	150	52	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:11:22

Test Graph

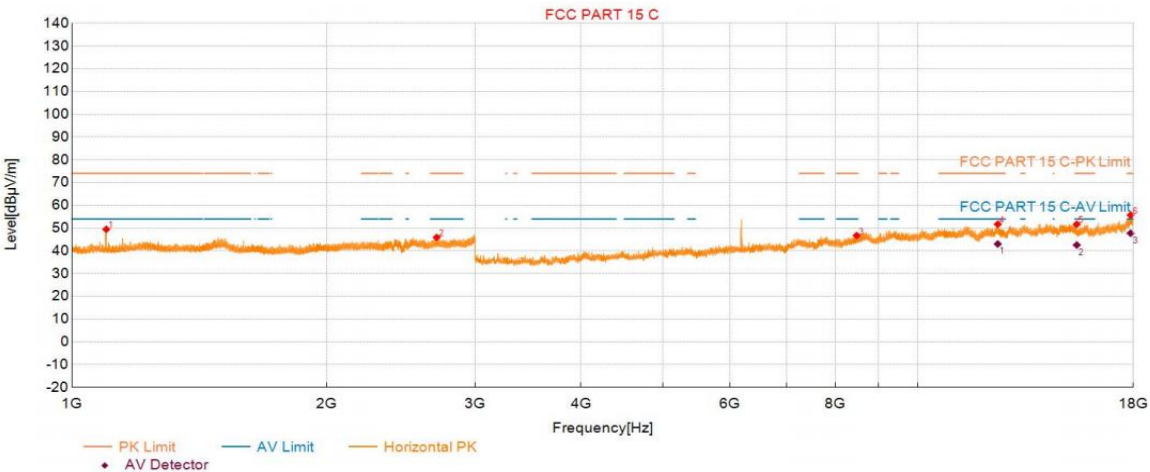

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1098.10	47.24	49.48	2.24	74.00	24.52	150	160	Horizontal
2	2700.19	37.45	45.89	8.44	74.00	28.11	150	250	Horizontal
3	8473.77	43.40	46.72	3.32	74.00	27.28	150	170	Horizontal
4	12442.97	43.00	51.70	8.70	74.00	22.30	150	9	Horizontal
5	15429.62	38.28	51.70	13.42	74.00	22.30	150	72	Horizontal
6	17864.99	37.22	55.74	18.52	74.00	18.26	150	221	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	12442.97	34.33	8.70	43.03	54.00	10.97	150	9	Horizontal
2	15429.62	29.13	13.42	42.55	54.00	11.45	150	72	Horizontal
3	17864.99	29.24	18.52	47.76	54.00	6.24	150	221	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:12:44

Test Graph

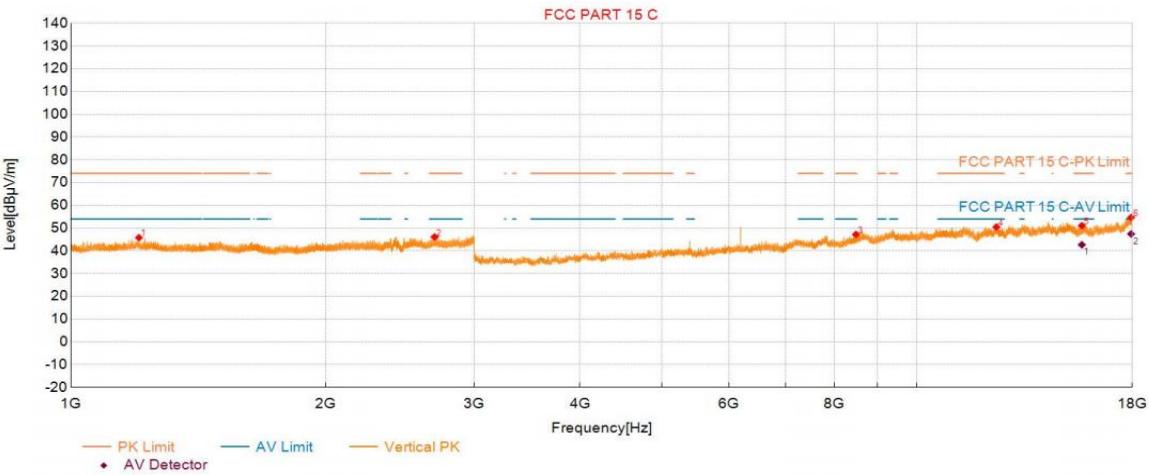

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1203.51	42.36	45.79	3.43	74.00	28.21	150	253	Vertical
2	2691.58	37.65	46.08	8.43	74.00	27.92	150	360	Vertical
3	8479.77	43.86	47.19	3.33	74.00	26.81	150	138	Vertical
4	12432.47	41.84	50.48	8.64	74.00	23.52	150	75	Vertical
5	15687.63	38.12	51.06	12.94	74.00	22.94	150	154	Vertical
6	17938.50	36.40	54.68	18.28	74.00	19.32	150	113	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15687.63	29.74	12.94	42.68	54.00	11.32	150	154	Vertical
2	17938.50	29.16	18.28	47.44	54.00	6.56	150	113	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2441	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:17:11

Test Graph

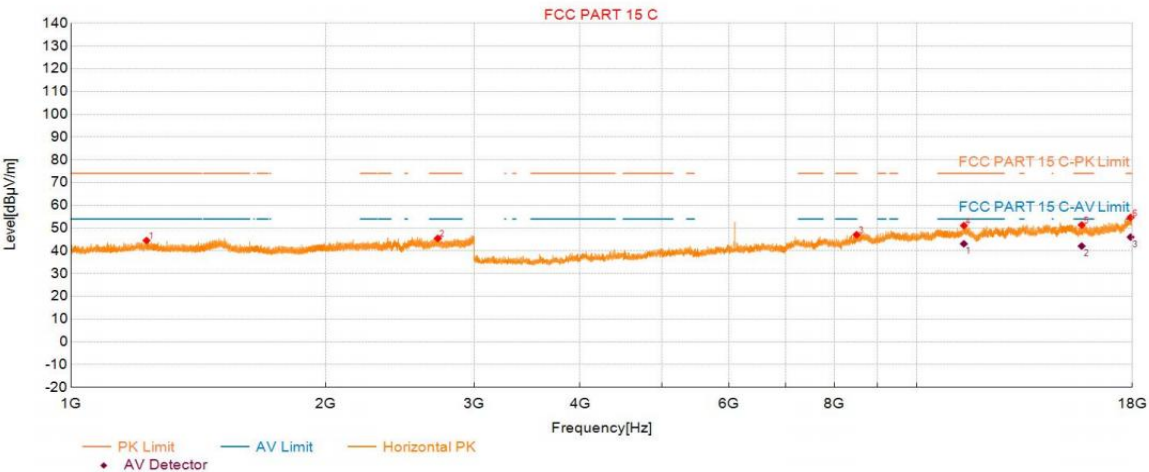

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1228.61	41.06	44.54	3.48	74.00	29.46	150	109	Horizontal
2	2715.89	37.04	45.47	8.43	74.00	28.53	150	320	Horizontal
3	8493.27	43.74	47.08	3.34	74.00	26.92	150	291	Horizontal
4	11377.92	42.89	51.10	8.21	74.00	22.90	150	58	Horizontal
5	15679.38	38.42	51.37	12.95	74.00	22.63	150	118	Horizontal
6	17915.25	36.20	54.70	18.50	74.00	19.30	150	291	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	11377.92	34.89	8.21	43.10	54.00	10.90	150	58	Horizontal
2	15679.38	29.14	12.95	42.09	54.00	11.91	150	118	Horizontal
3	17915.25	27.54	18.50	46.04	54.00	7.96	150	291	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2441	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:18:33

Test Graph

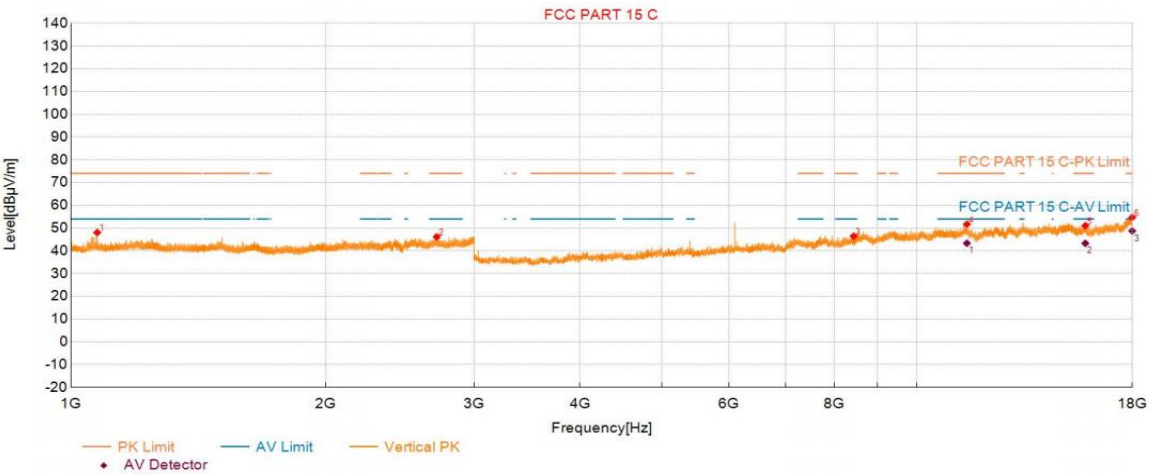

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1074.20	46.03	48.06	2.03	74.00	25.94	150	284	Vertical
2	2707.39	37.70	46.14	8.44	74.00	27.86	150	360	Vertical
3	8428.02	43.15	46.44	3.29	74.00	27.56	150	302	Vertical
4	11471.67	43.54	51.71	8.17	74.00	22.29	150	116	Vertical
5	15836.89	38.20	51.05	12.85	74.00	22.95	150	240	Vertical
6	17993.25	36.94	54.69	17.75	74.00	19.31	150	317	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	11471.67	35.18	8.17	43.35	54.00	10.65	150	116	Vertical
2	15836.89	30.47	12.85	43.32	54.00	10.68	150	240	Vertical
3	17993.25	30.98	17.75	48.73	54.00	5.27	150	317	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:23:14

Test Graph

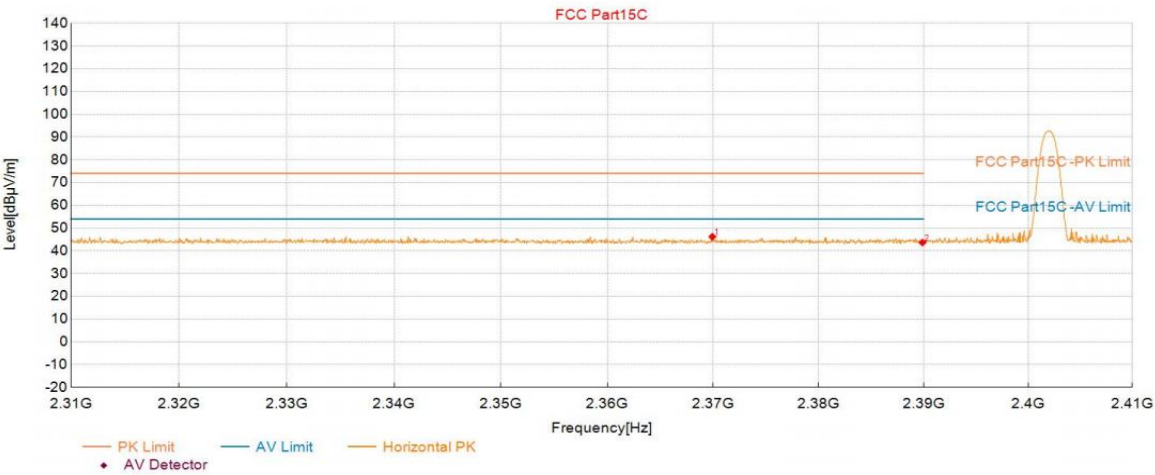

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2369.93	39.66	46.21	6.55	74.00	27.79	150	239	Horizontal
2	2389.89	37.10	43.65	6.55	74.00	30.35	150	243	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:23:54

Test Graph

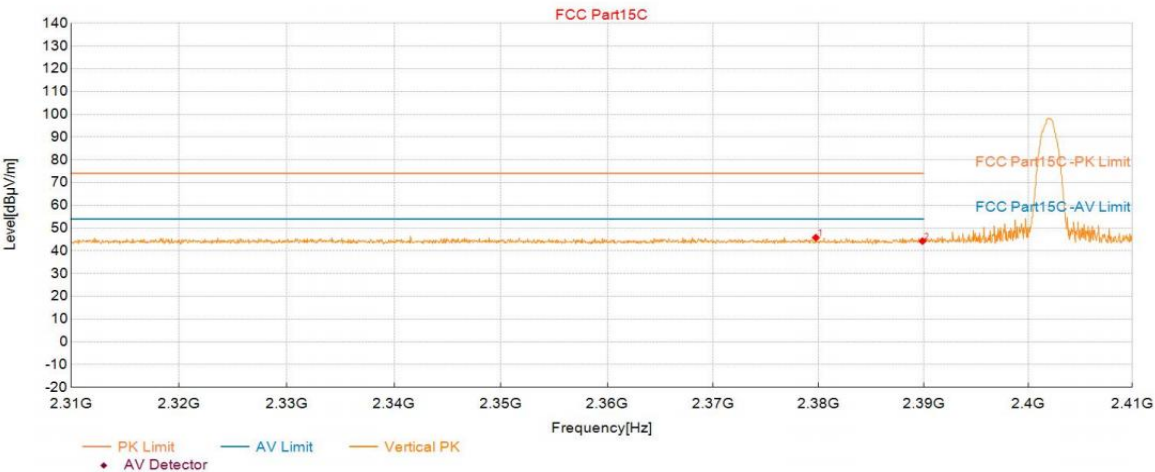

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2379.73	39.27	45.81	6.54	74.00	28.19	150	0	Vertical
2	2389.89	37.75	44.30	6.55	74.00	29.70	150	126	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:26:30

Test Graph

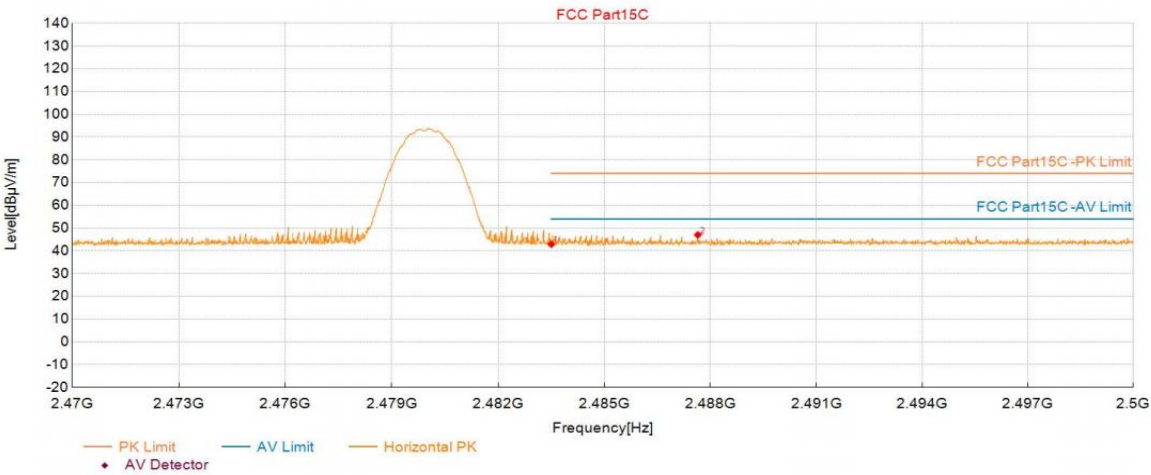

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	35.84	42.88	7.04	74.00	31.12	150	320	Horizontal
2	2487.65	39.96	47.01	7.05	74.00	26.99	150	121	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:27:10

Test Graph

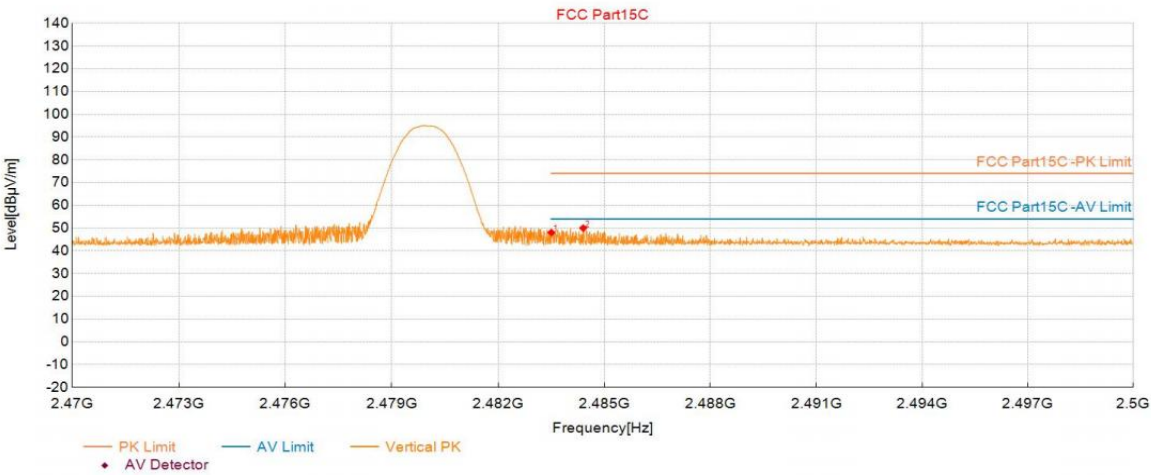

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	41.01	48.05	7.04	74.00	25.95	150	143	Vertical
2	2484.40	42.96	50.00	7.04	74.00	24.00	150	138	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	2DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:48:36

Test Graph

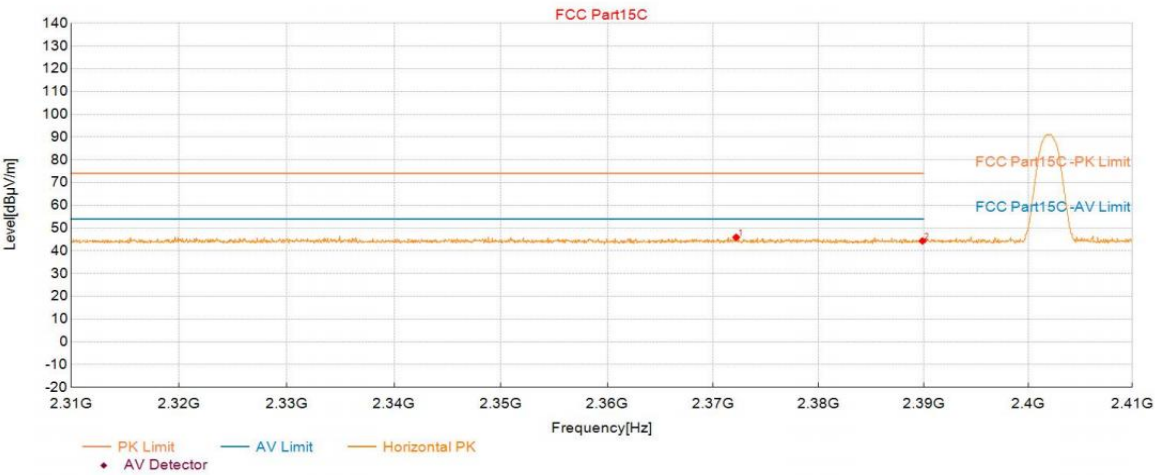

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2372.18	39.42	45.96	6.54	74.00	28.04	150	103	Horizontal
2	2389.89	37.79	44.34	6.55	74.00	29.66	150	312	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	2DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:49:16

Test Graph

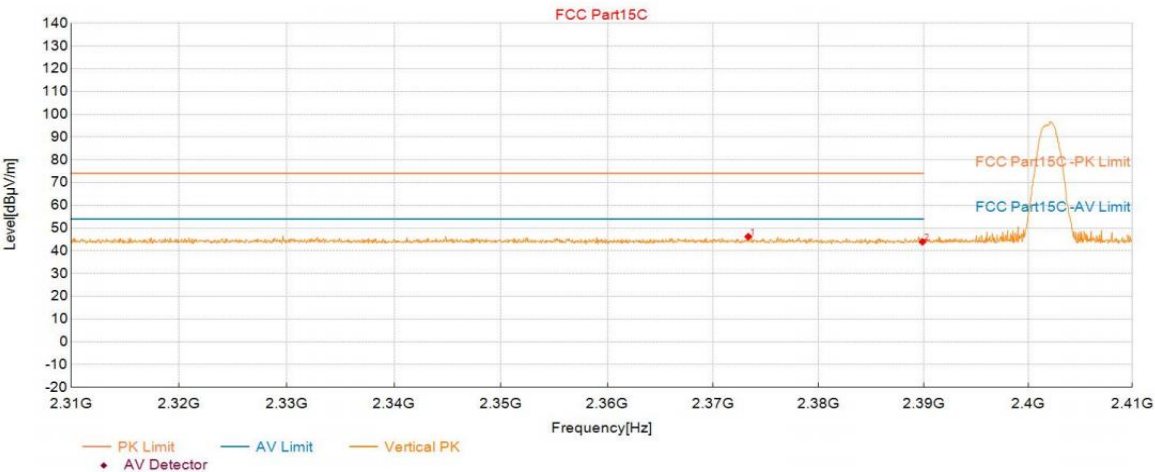

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2373.33	39.68	46.22	6.54	74.00	27.78	150	123	Vertical
2	2389.89	37.41	43.96	6.55	74.00	30.04	150	26	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	2DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:51:25

Test Graph

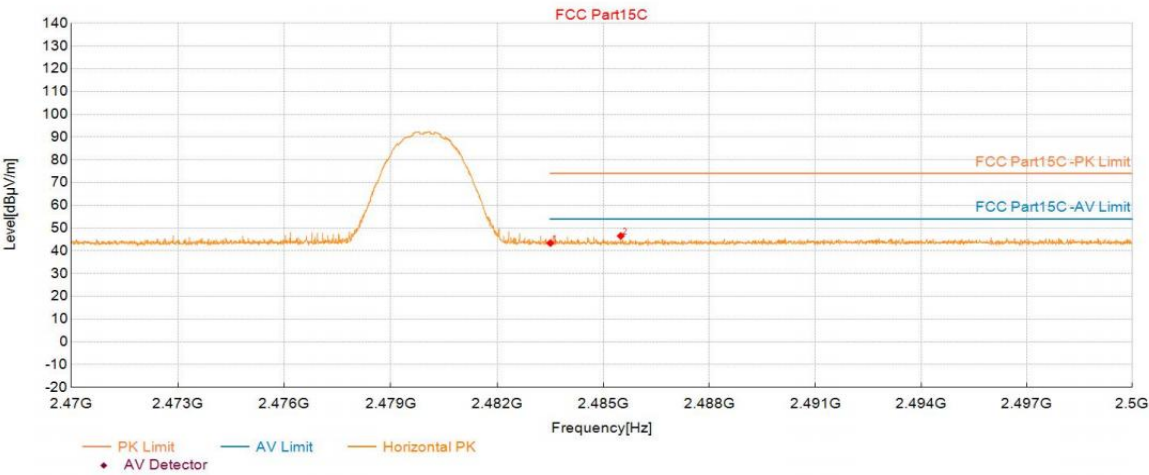

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	36.34	43.38	7.04	74.00	30.62	150	52	Horizontal
2	2485.50	39.51	46.55	7.04	74.00	27.45	150	121	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	2DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:52:06

Test Graph

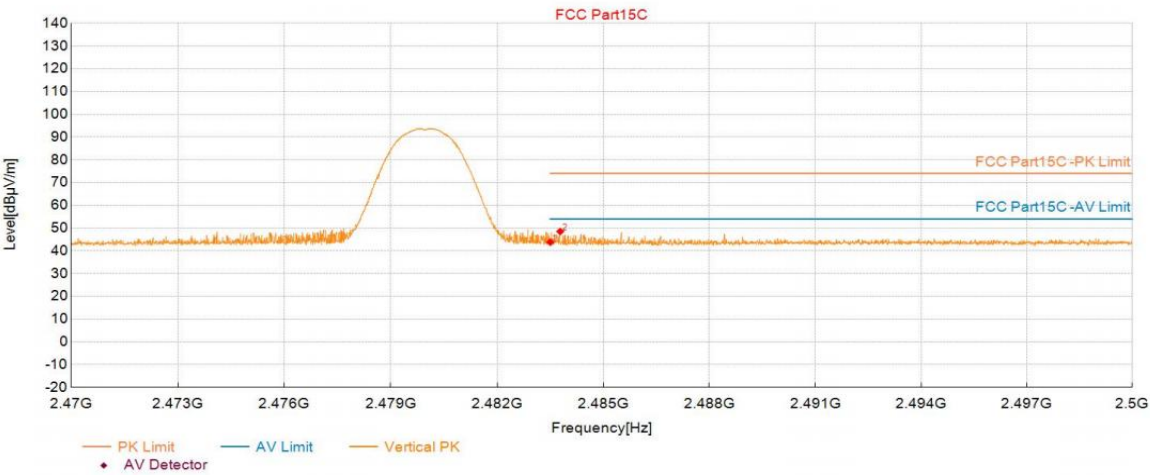

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	36.77	43.81	7.04	74.00	30.19	150	108	Vertical
2	2483.78	41.47	48.51	7.04	74.00	25.49	150	187	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:29:52

Test Graph

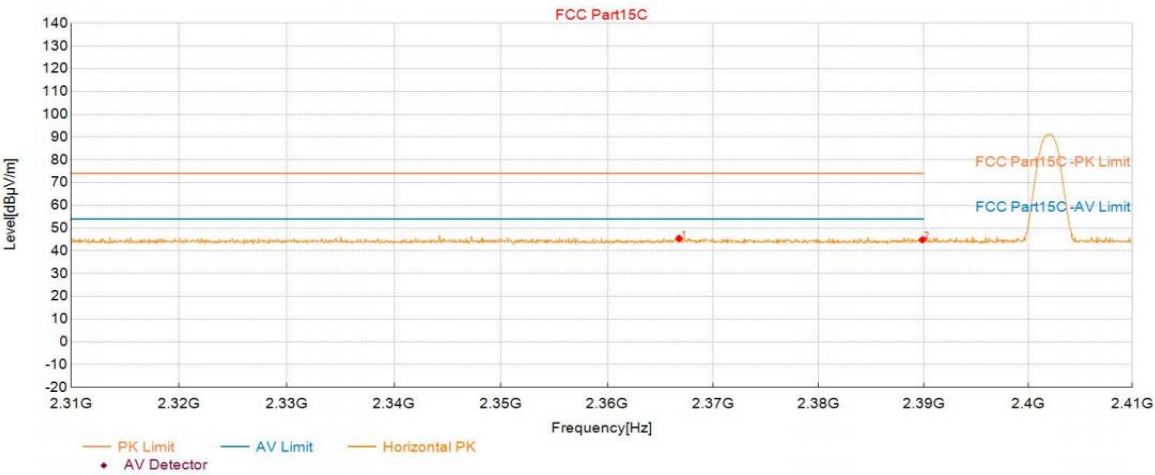

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2366.78	38.90	45.45	6.55	74.00	28.55	150	54	Horizontal
2	2389.89	38.31	44.86	6.55	74.00	29.14	150	177	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:30:32

Test Graph

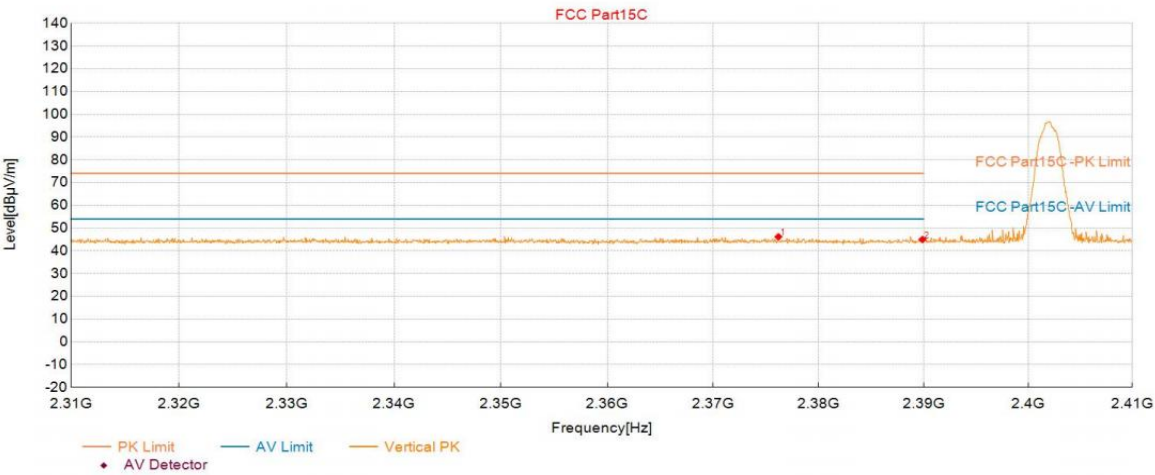

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2376.18	39.63	46.17	6.54	74.00	27.83	150	293	Vertical
2	2389.89	38.43	44.98	6.55	74.00	29.02	150	243	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:33:29

Test Graph

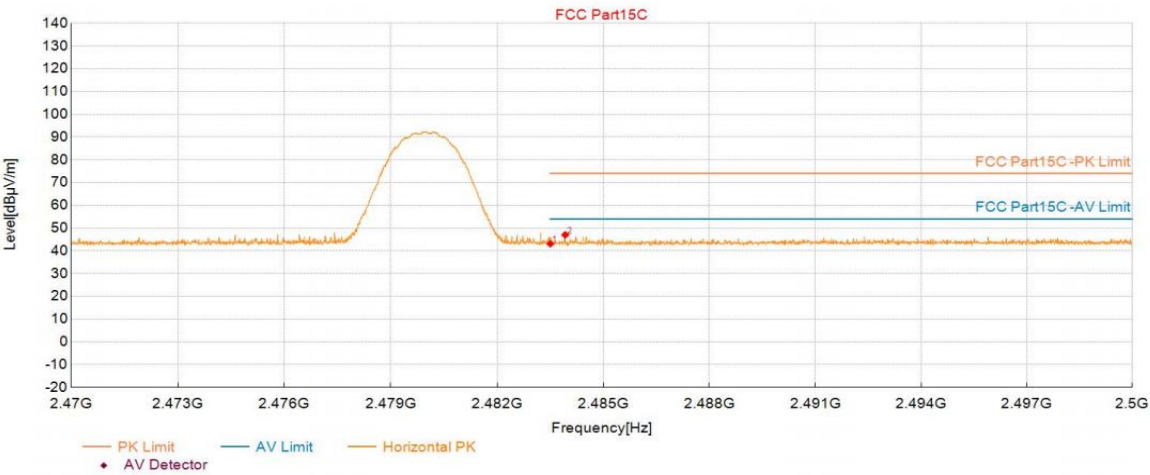

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	36.07	43.11	7.04	74.00	30.89	150	261	Horizontal
2	2483.92	39.99	47.03	7.04	74.00	26.97	150	122	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP16-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-11 17:34:10

Test Graph

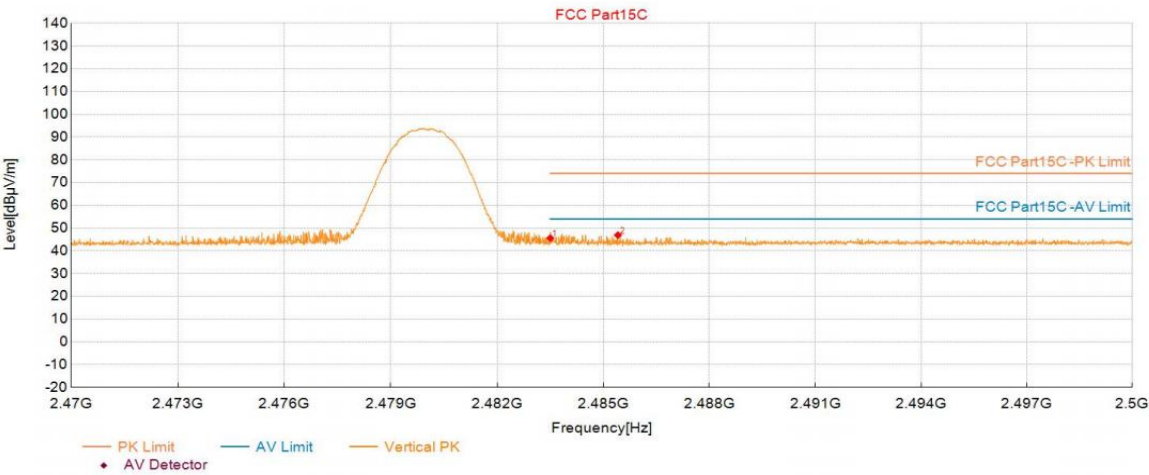

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	38.57	45.61	7.04	74.00	28.39	150	131	Vertical
2	2485.42	39.88	46.92	7.04	74.00	27.08	150	146	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 11:38:19

Test Graph

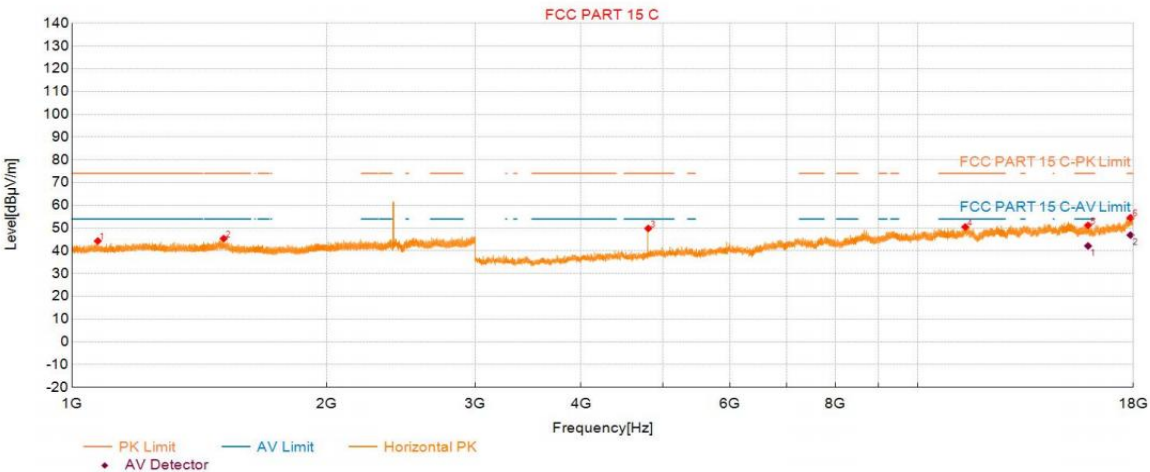

Suspected Data List

NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1073.00	42.30	44.32	2.02	74.00	29.68	150	152	Horizontal
2	1511.83	41.28	45.38	4.10	74.00	28.62	150	127	Horizontal
3	4803.84	58.15	49.84	-8.31	74.00	24.16	150	140	Horizontal
4	11389.17	42.19	50.50	8.31	74.00	23.50	150	187	Horizontal
5	15911.90	38.37	51.23	12.86	74.00	22.77	150	148	Horizontal
6	17858.24	36.10	54.59	18.49	74.00	19.41	150	234	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15911.90	29.29	12.86	42.15	54.00	11.85	150	148	Horizontal
2	17858.24	28.44	18.49	46.93	54.00	7.07	150	234	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 11:39:42

Test Graph

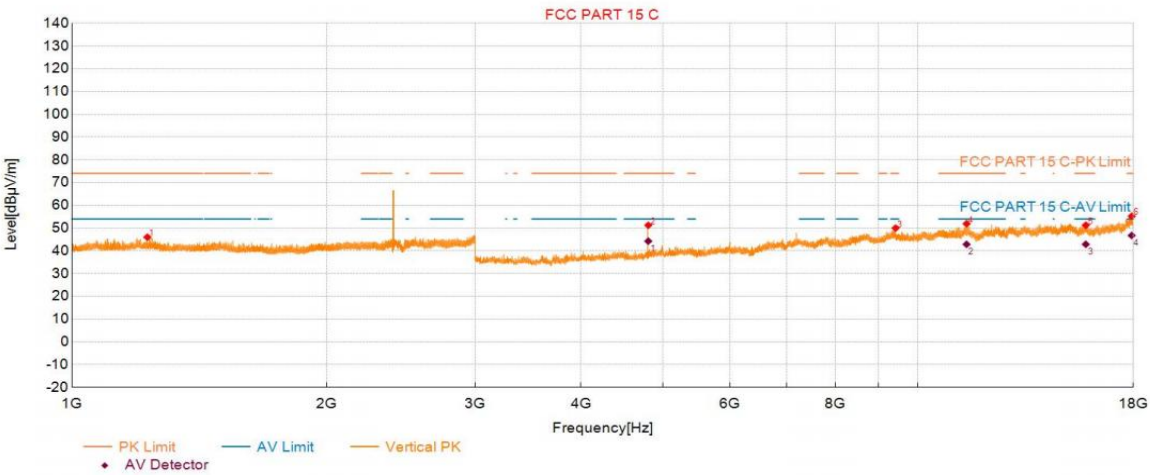

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1228.21	42.52	46.00	3.48	74.00	28.00	150	118	Vertical
2	4803.84	59.54	51.23	-8.31	74.00	22.77	150	206	Vertical
3	9420.32	43.46	49.99	6.53	74.00	24.01	150	317	Vertical
4	11429.67	43.62	51.93	8.31	74.00	22.07	150	154	Vertical
5	15813.64	38.46	51.26	12.80	74.00	22.74	150	5	Vertical
6	17919.75	36.78	55.24	18.46	74.00	18.76	150	360	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	4803.84	52.59	-8.31	44.28	54.00	9.72	150	206	Vertical
2	11429.67	34.56	8.31	42.87	54.00	11.13	150	154	Vertical
3	15813.64	30.08	12.80	42.88	54.00	11.12	150	5	Vertical
4	17919.75	28.31	18.46	46.77	54.00	7.23	150	360	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2441	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 11:44:41

Test Graph

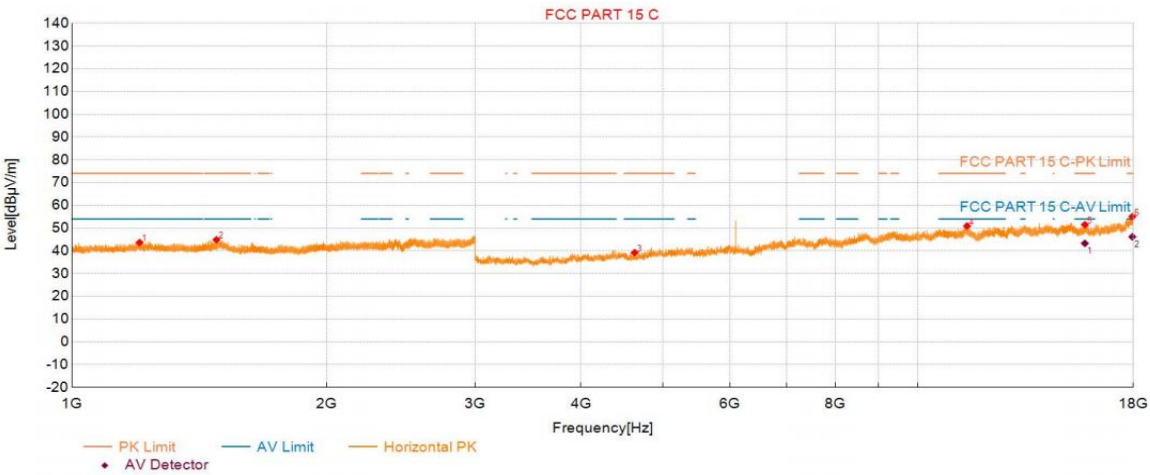

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1202.51	40.21	43.64	3.43	74.00	30.36	150	82	Horizontal
2	1482.02	40.80	44.86	4.06	74.00	29.14	150	128	Horizontal
3	4629.08	48.57	39.21	-9.36	74.00	34.79	150	57	Horizontal
4	11445.42	42.66	50.92	8.26	74.00	23.08	150	331	Horizontal
5	15775.39	38.67	51.49	12.82	74.00	22.51	150	57	Horizontal
6	17950.50	36.88	55.04	18.16	74.00	18.96	150	216	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15775.39	30.47	12.82	43.29	54.00	10.71	150	57	Horizontal
2	17950.50	28.01	18.16	46.17	54.00	7.83	150	216	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2441	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 11:46:03

Test Graph

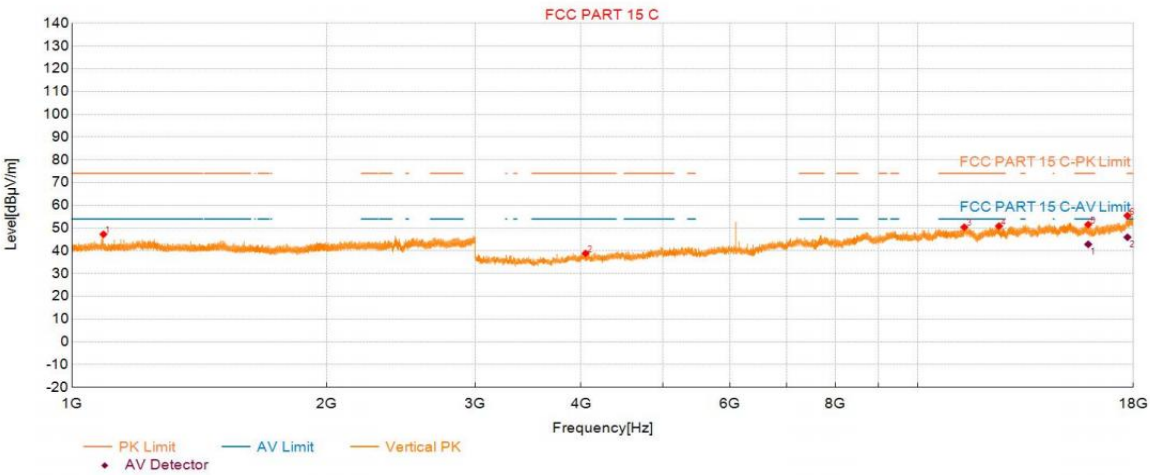

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1089.70	45.12	47.29	2.17	74.00	26.71	150	297	Vertical
2	4050.05	49.87	38.85	-11.02	74.00	35.15	150	320	Vertical
3	11359.92	42.36	50.40	8.04	74.00	23.60	150	344	Vertical
4	12485.72	41.93	50.88	8.95	74.00	23.12	150	344	Vertical
5	15920.15	38.80	51.59	12.79	74.00	22.41	150	34	Vertical
6	17713.49	37.14	55.48	18.34	74.00	18.52	150	350	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	15920.15	30.09	12.79	42.88	54.00	11.12	150	34	Vertical
2	17713.49	27.63	18.34	45.97	54.00	8.03	150	350	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 11:50:36

Test Graph

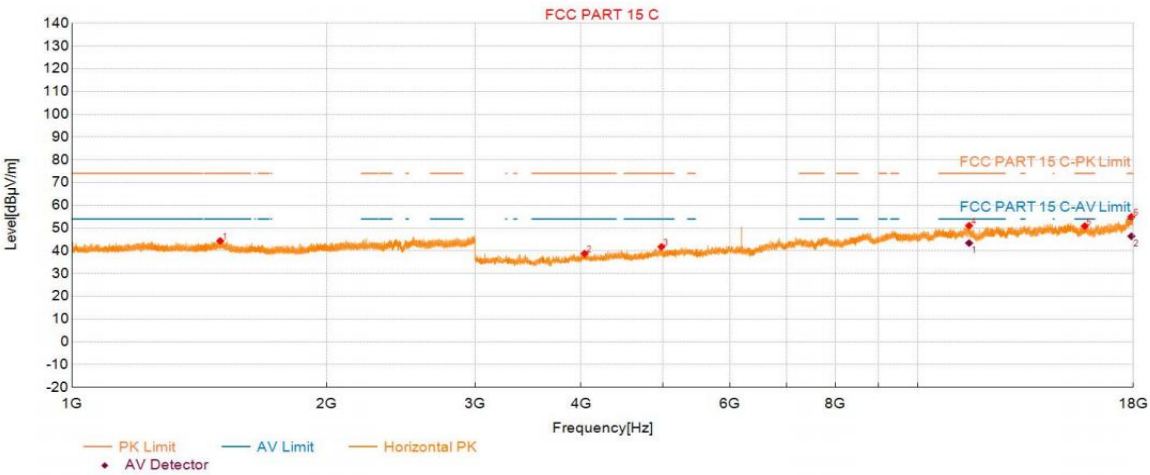

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1497.42	40.30	44.37	4.07	74.00	29.63	150	122	Horizontal
2	4039.55	49.84	38.80	-11.04	74.00	35.20	150	173	Horizontal
3	4979.35	48.94	41.79	-7.15	74.00	32.21	150	180	Horizontal
4	11509.18	43.00	51.04	8.04	74.00	22.96	150	260	Horizontal
5	15770.14	38.07	50.89	12.82	74.00	23.11	150	360	Horizontal
6	17902.50	36.36	54.98	18.62	74.00	19.02	150	254	Horizontal

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBµV/m)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	11509.18	35.38	8.04	43.42	54.00	10.58	150	260	Horizontal
2	17902.50	27.78	18.62	46.40	54.00	7.60	150	254	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 11:51:58

Test Graph

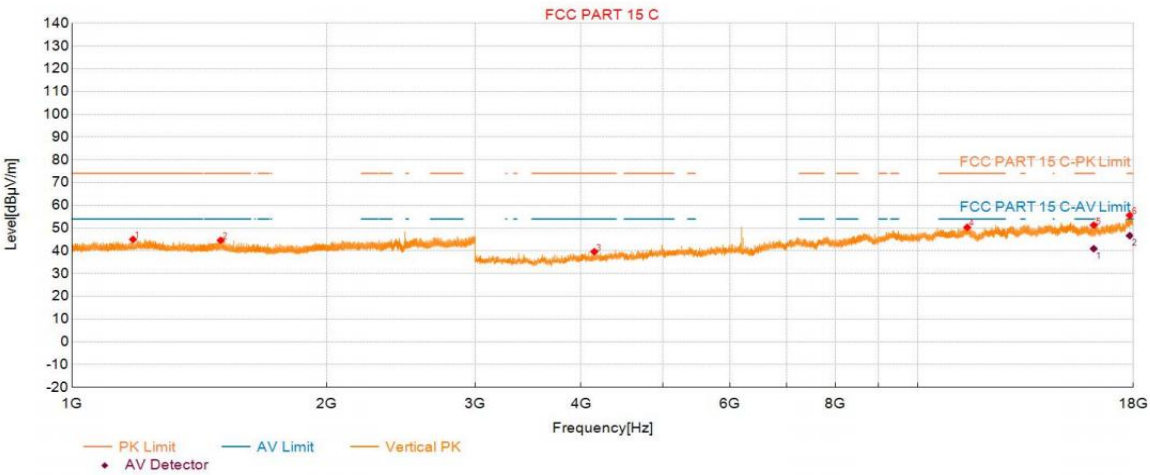

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1181.01	41.88	45.02	3.14	74.00	28.98	150	134	Vertical
2	1499.42	40.54	44.61	4.07	74.00	29.39	150	102	Vertical
3	4146.81	50.53	39.60	-10.93	74.00	34.40	150	214	Vertical
4	11450.67	42.09	50.33	8.24	74.00	23.67	150	206	Vertical
5	16160.16	39.39	51.28	11.89	74.00	22.72	150	33	Vertical
6	17821.49	37.29	55.64	18.35	74.00	18.36	150	26	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	16160.16	29.06	11.89	40.95	54.00	13.05	150	33	Vertical
2	17821.49	28.32	18.35	46.67	54.00	7.33	150	26	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-18 19:24:45

Test Graph

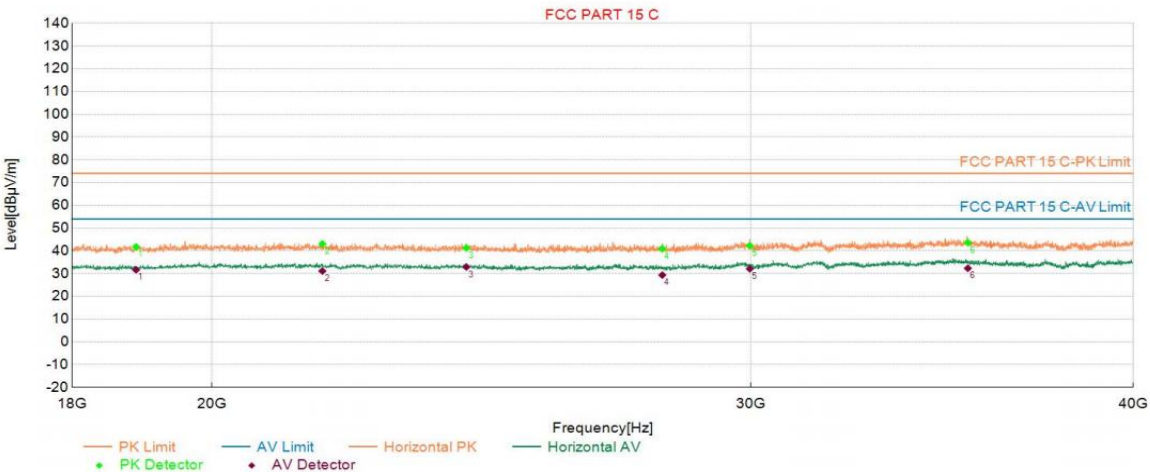

PK Final Data List								
NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18888.978	39.27	41.74	74.00	32.26	150	350	Horizontal
2	21731.946	37.86	43.06	74.00	30.94	150	340	Horizontal
3	24218.444	33.83	41.32	74.00	32.68	150	340	Horizontal
4	28064.813	36.82	40.94	74.00	33.06	150	250	Horizontal
5	29974.795	33.01	42.24	74.00	31.76	150	180	Horizontal
6	35317.463	32.69	43.60	74.00	30.40	150	340	Horizontal

AV Final Data List								
NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	18888.978	29.20	31.67	54.00	22.33	150	350	Horizontal
2	21731.946	25.92	31.12	54.00	22.88	150	340	Horizontal
3	24218.444	25.42	32.91	54.00	21.09	150	340	Horizontal
4	28064.813	25.23	29.35	54.00	24.65	150	250	Horizontal
5	29974.795	22.88	32.11	54.00	21.89	150	180	Horizontal
6	35317.463	21.43	32.34	54.00	21.66	150	340	Horizontal


Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value
Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-18 19:25:03

Test Graph

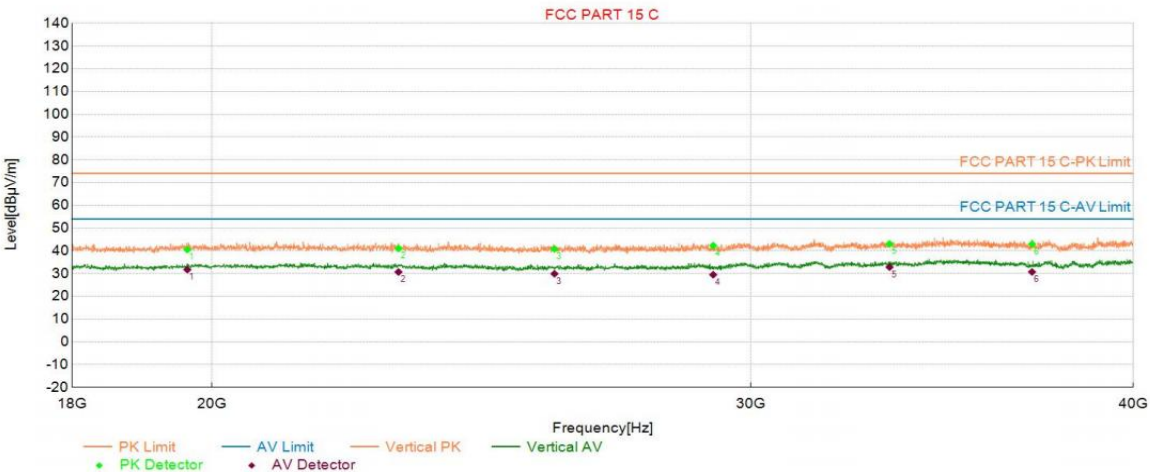

PK Final Data List								
NO.	Freq. (MHz)	PK Reading(dB μ V/m)	PK Value (dB μ V/m)	PK Limit (dB μ V/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19632.727	37.14	40.57	74.00	33.43	150	340	Vertical
2	23012.603	34.14	41.04	74.00	32.96	150	230	Vertical
3	25877.576	35.48	40.85	74.00	33.15	150	10	Vertical
4	29160.632	35.15	42.28	74.00	31.72	150	90	Vertical
5	33297.459	33.88	43.04	74.00	30.96	150	330	Vertical
6	37064.613	33.13	42.96	74.00	31.04	150	100	Vertical

AV Final Data List								
NO.	Freq. (MHz)	AV Reading(dB μ V/m)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19632.727	28.29	31.72	54.00	22.28	150	340	Vertical
2	23012.603	23.79	30.69	54.00	23.31	150	230	Vertical
3	25877.576	24.55	29.92	54.00	24.08	150	10	Vertical
4	29160.632	22.39	29.52	54.00	24.48	150	90	Vertical
5	33297.459	23.66	32.82	54.00	21.18	150	330	Vertical
6	37064.613	20.90	30.73	54.00	23.27	150	100	Vertical


Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value
Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:42:31

Test Graph

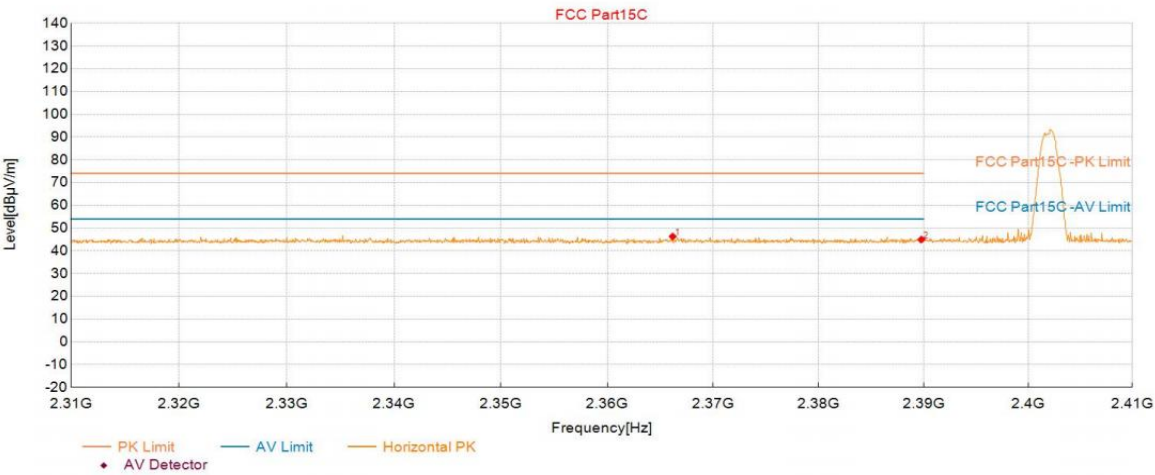

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2366.18	39.77	46.32	6.55	74.00	27.68	150	8	Horizontal
2	2389.79	38.46	45.01	6.55	74.00	28.99	150	136	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:43:11

Test Graph

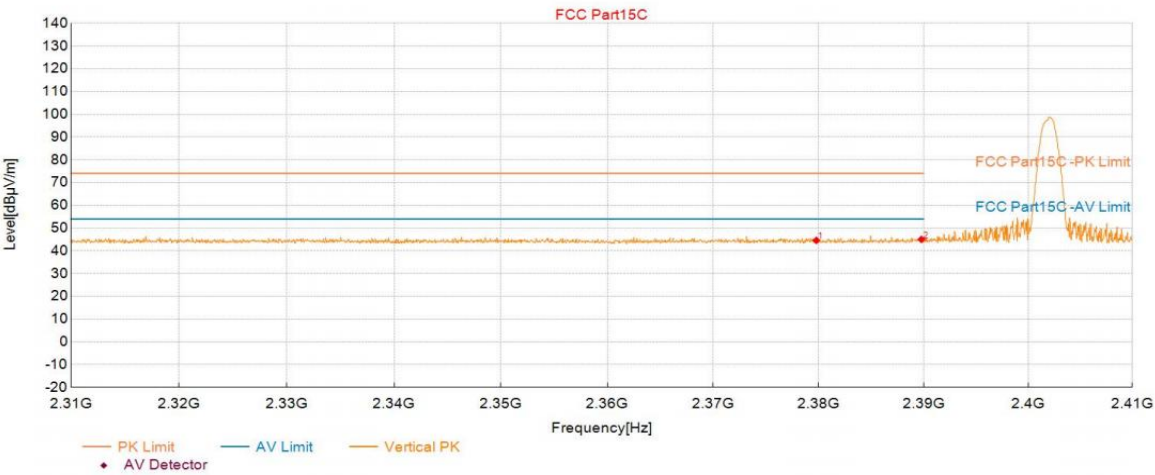

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2379.78	38.05	44.59	6.54	74.00	29.41	150	6	Vertical
2	2389.79	38.48	45.03	6.55	74.00	28.97	150	276	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:45:50

Test Graph

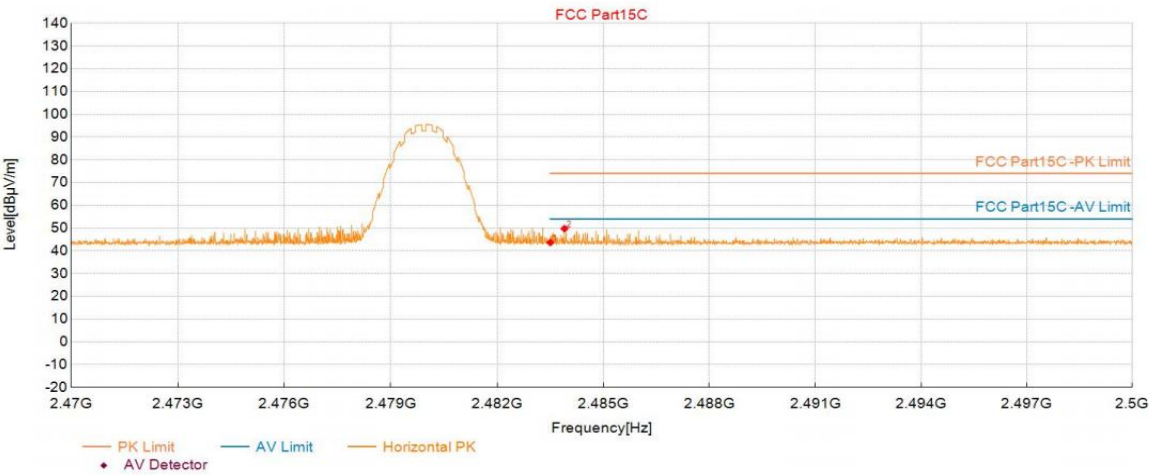

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	36.63	43.67	7.04	74.00	30.33	150	316	Horizontal
2	2483.90	42.69	49.73	7.04	74.00	24.27	150	199	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:46:31

Test Graph

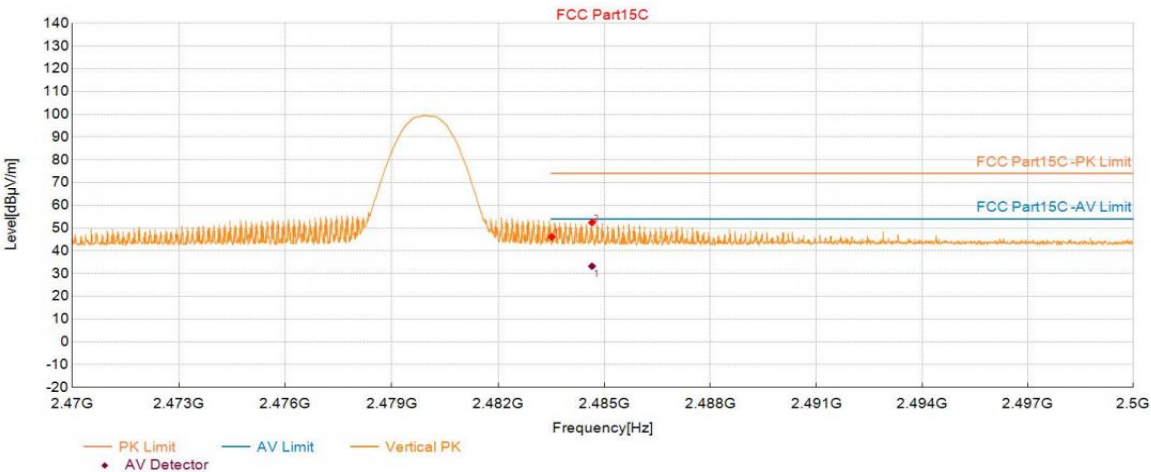

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.51	39.10	46.14	7.04	74.00	27.86	150	242	Vertical
2	2484.65	45.38	52.42	7.04	74.00	21.58	150	128	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2484.65	26.20	7.04	33.24	54.00	20.76	150	128	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	2DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:48:54

Test Graph

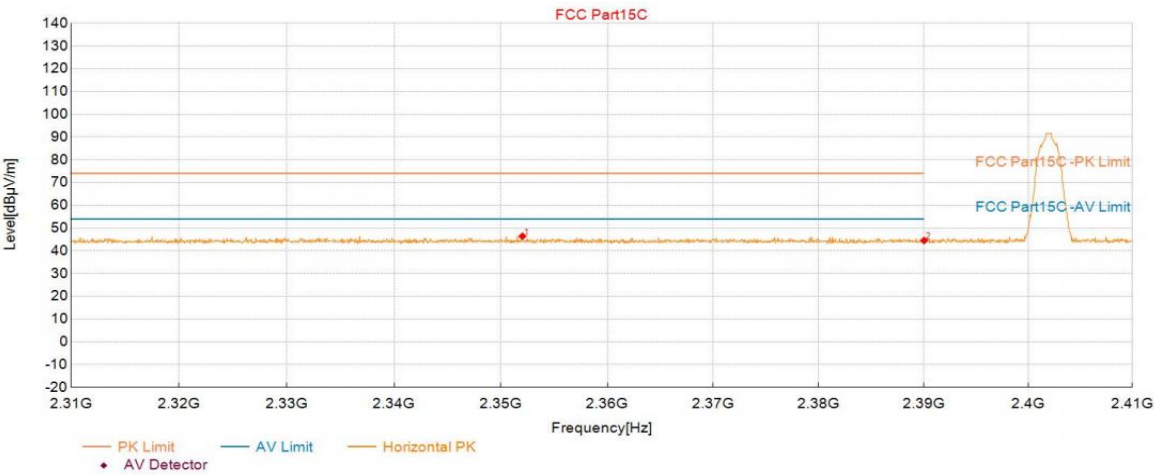

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2352.02	39.87	46.42	6.55	74.00	27.58	150	171	Horizontal
2	2390.04	38.00	44.54	6.54	-	-	150	34	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	2DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:49:34

Test Graph

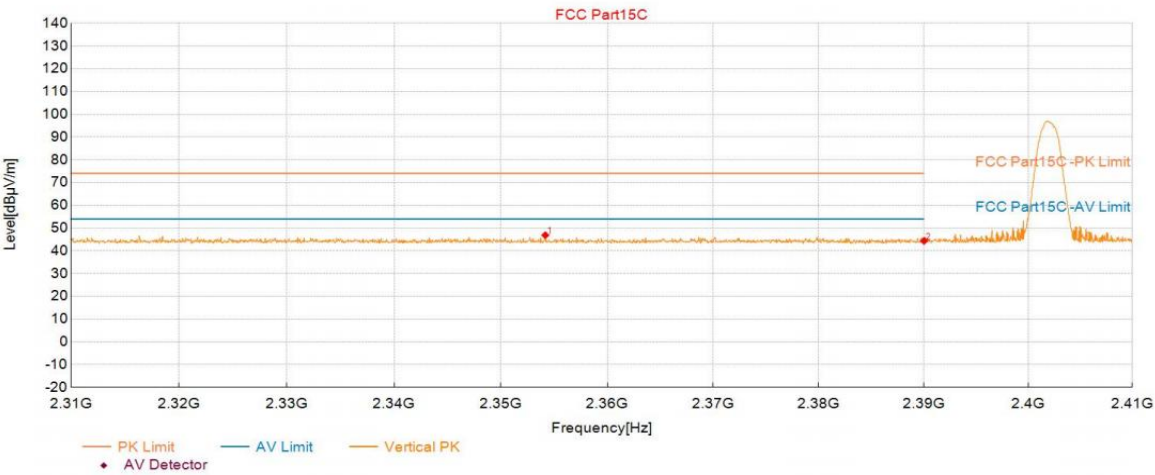

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2354.17	40.33	46.88	6.55	74.00	27.12	150	260	Vertical
2	2390.04	37.82	44.36	6.54	-	-	150	172	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	2DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:51:19

Test Graph

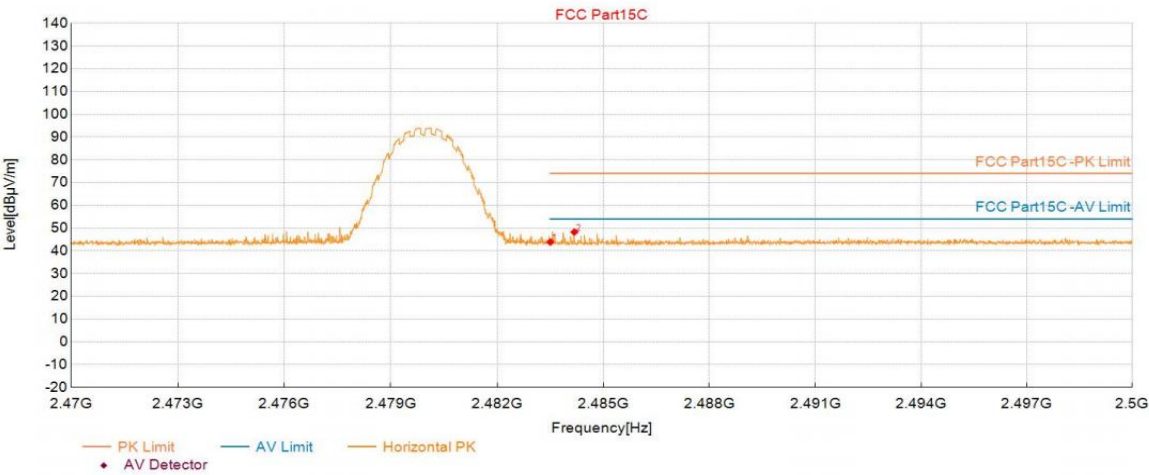

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	36.81	43.85	7.04	74.00	30.15	150	225	Horizontal
2	2484.18	41.23	48.27	7.04	74.00	25.73	150	200	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	2DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:51:59

Test Graph

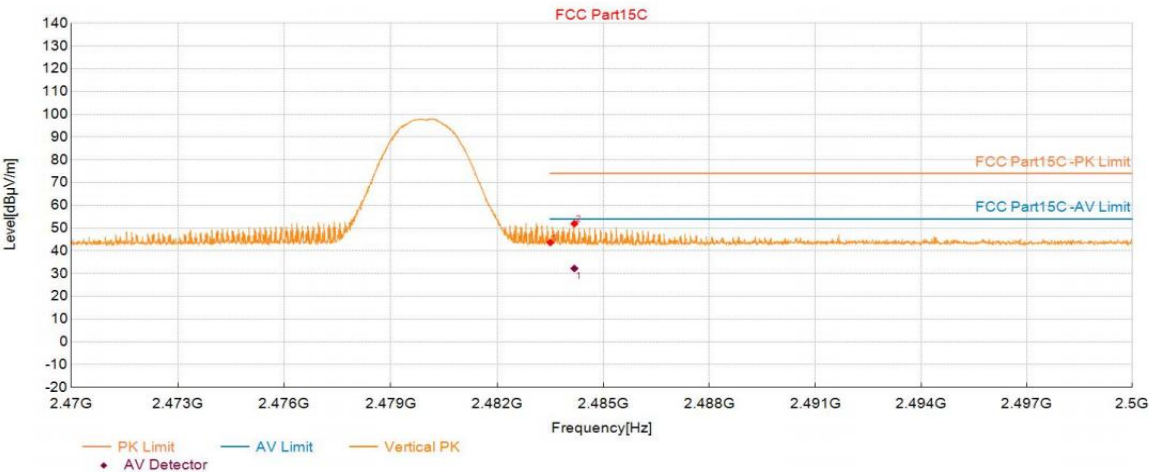

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	36.63	43.67	7.04	74.00	30.33	150	117	Vertical
2	2484.18	44.92	51.96	7.04	74.00	22.04	150	136	Vertical

AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2484.18	25.21	7.04	32.25	54.00	21.75	150	136	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:54:07

Test Graph

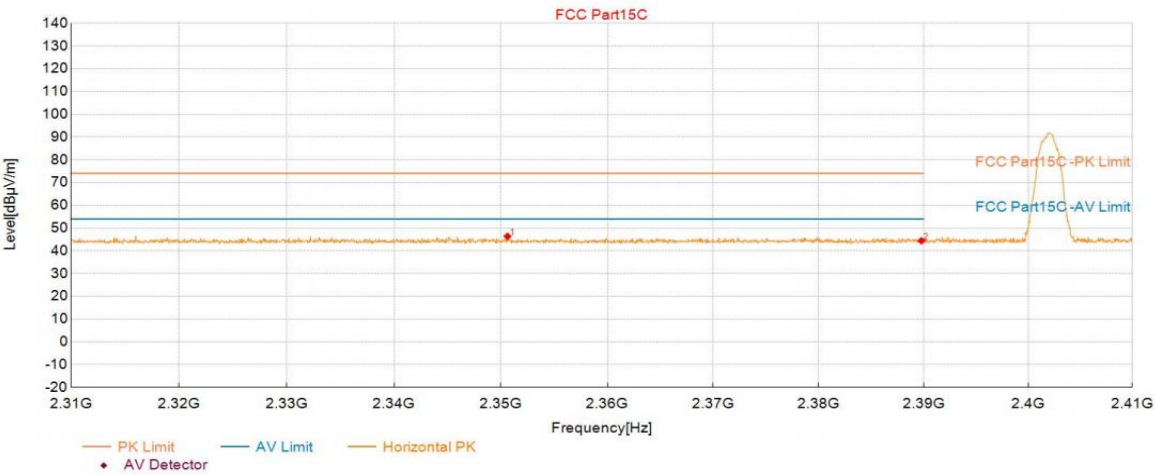

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2350.62	39.82	46.37	6.55	74.00	27.63	150	222	Horizontal
2	2389.79	37.86	44.41	6.55	74.00	29.59	150	0	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2402	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:54:46

Test Graph

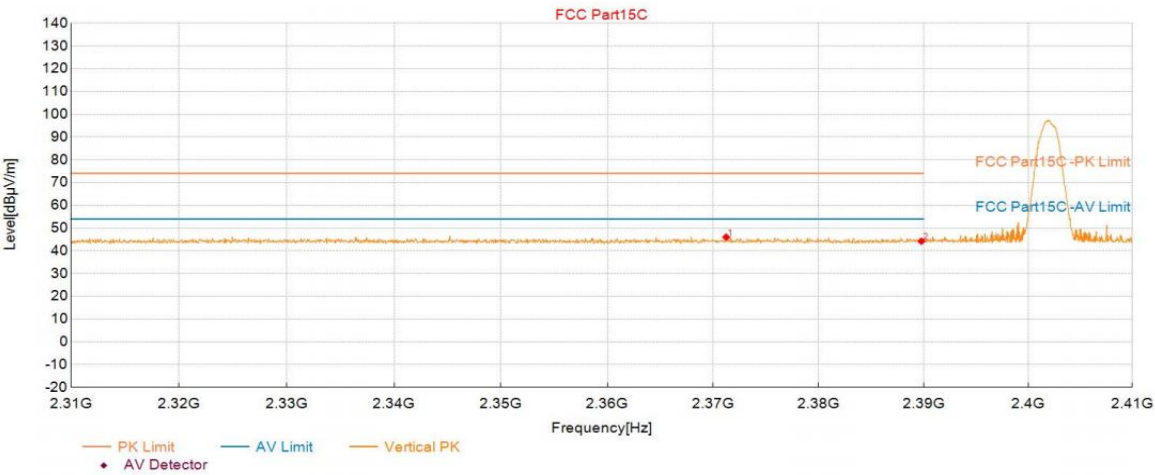

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBµV/m)	PK Level (dBµV/m)	Factor (dB)	PK Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2371.23	39.48	46.02	6.54	74.00	27.98	150	298	Vertical
2	2389.79	37.67	44.22	6.55	74.00	29.78	150	6	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:56:48

Test Graph

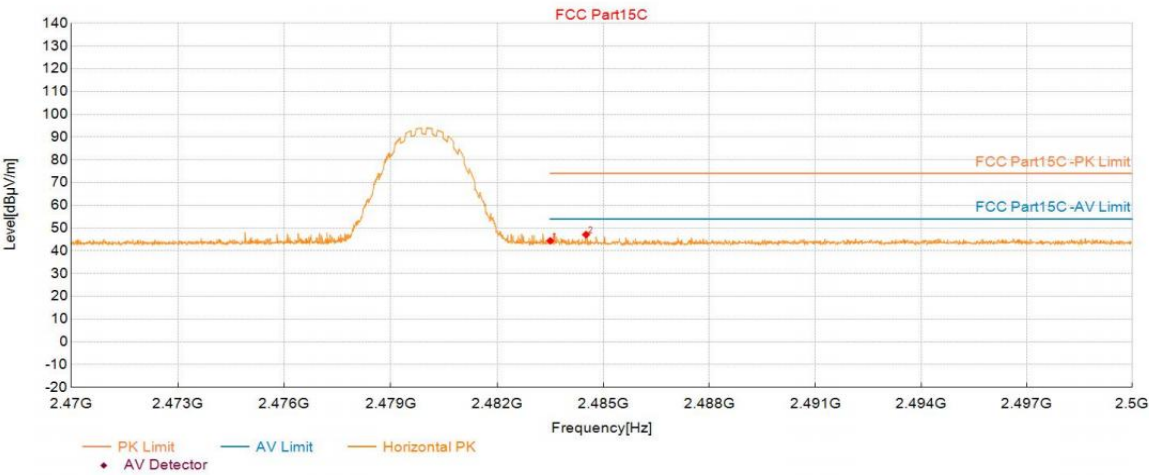

Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	37.39	44.43	7.04	74.00	29.57	150	316	Horizontal
2	2484.51	40.10	47.14	7.04	74.00	26.86	150	200	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	Tablet		
EUT:			
Model:	MP24-Cesium-V	SN:	
Mode:	3DH5_2480	Voltage:	12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-05-10 14:57:28

Test Graph

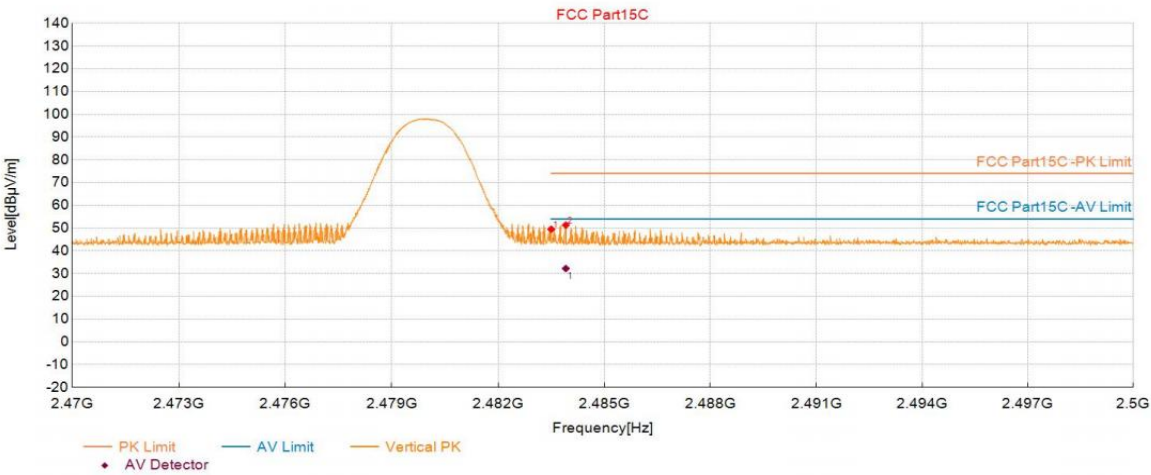



Suspected Data List									
NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.50	42.45	49.49	7.04	74.00	24.51	150	147	Vertical
2	2483.91	44.28	51.32	7.04	74.00	22.68	150	128	Vertical


AV Final Data List									
NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.91	25.21	7.04	32.25	54.00	21.75	150	128	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level


APPENDIX C – AC Power Line Conducted Emission Test Data

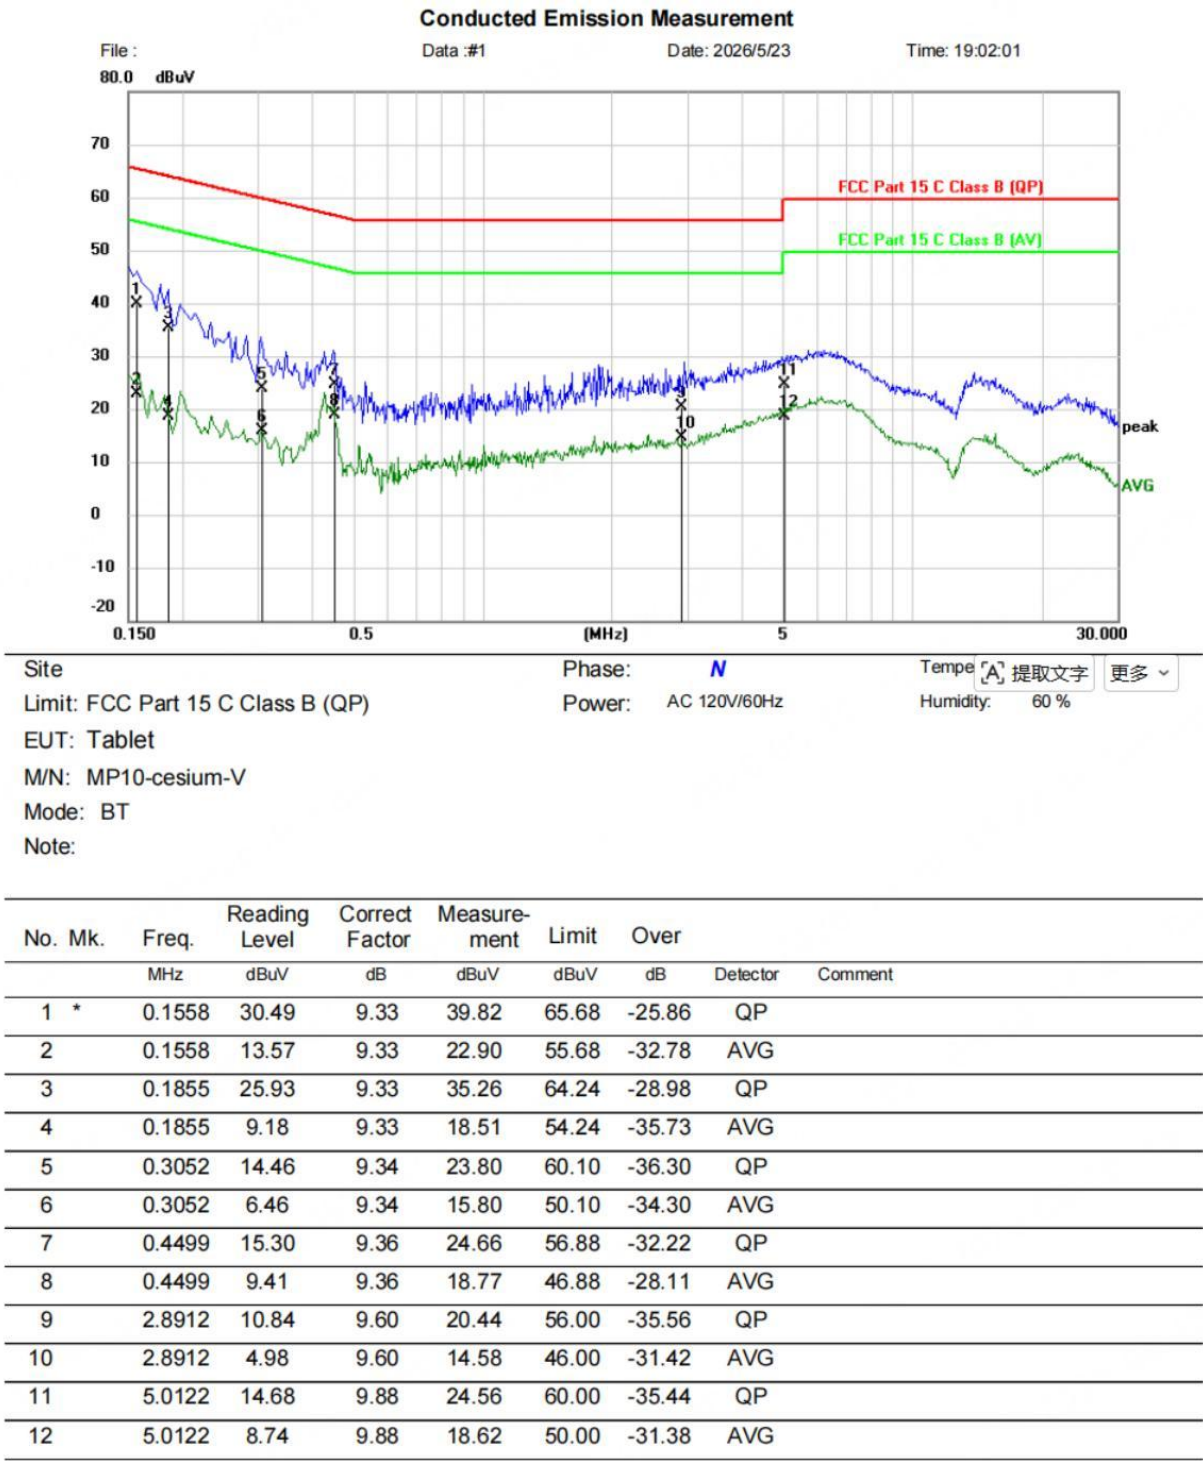


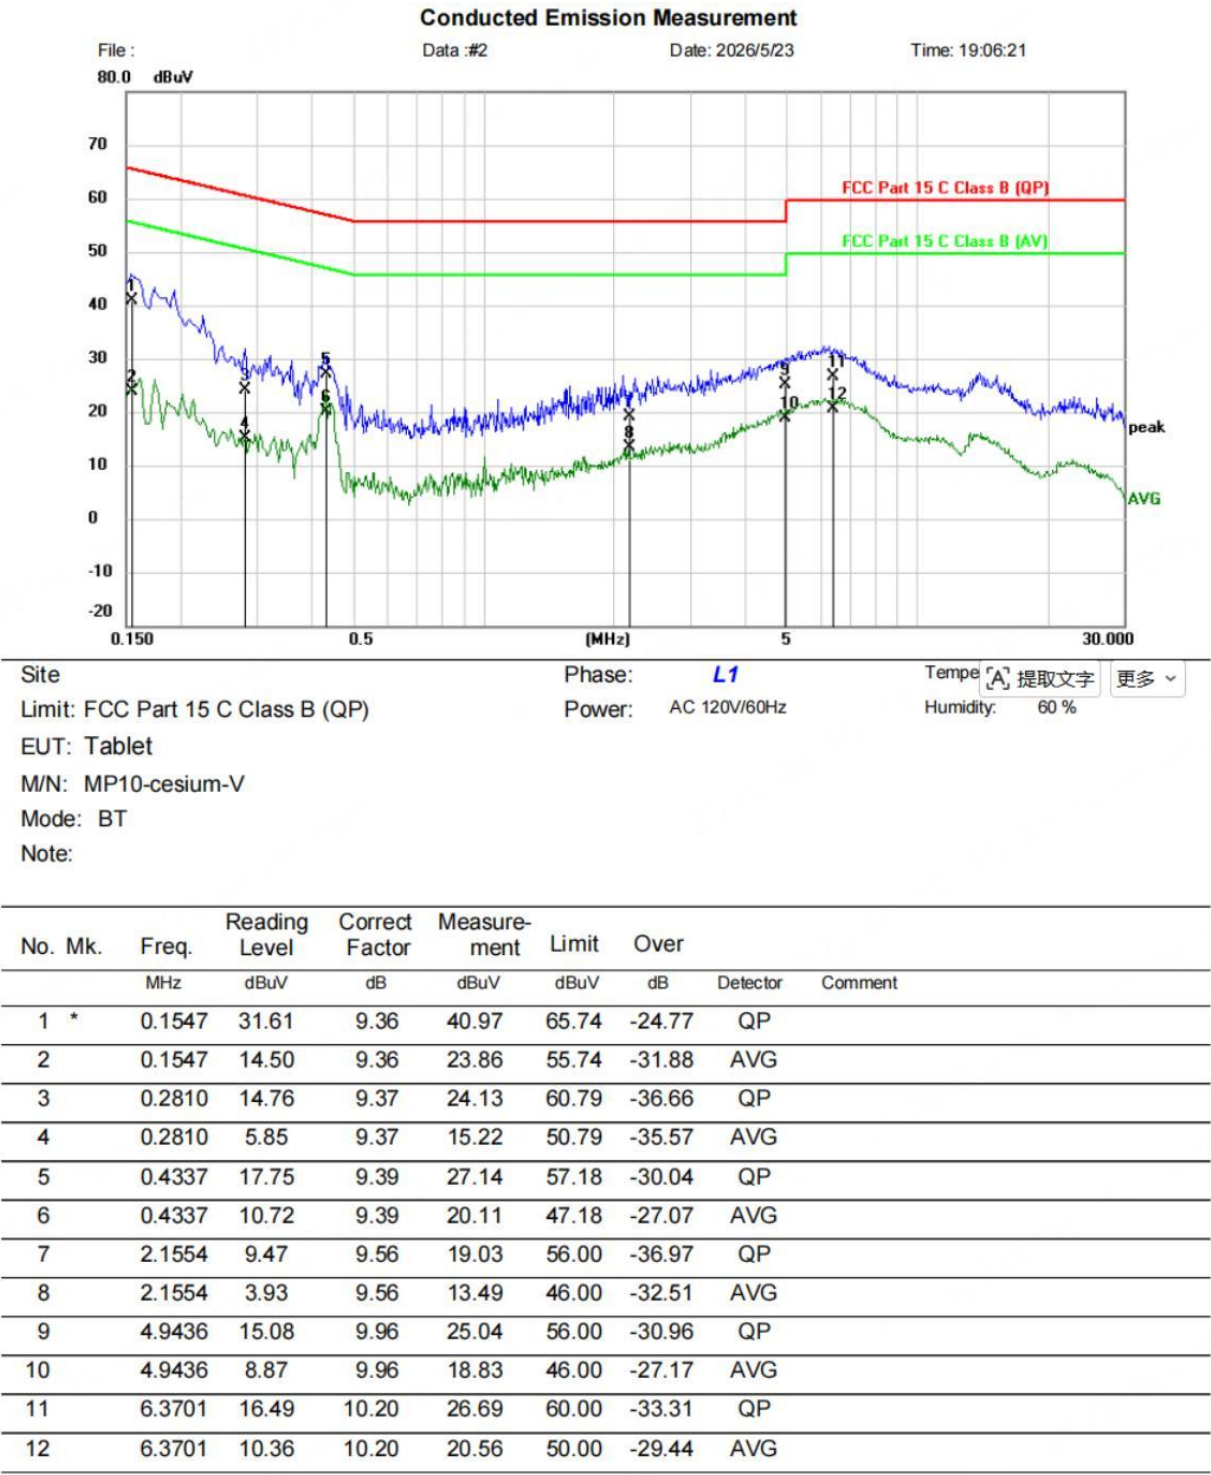

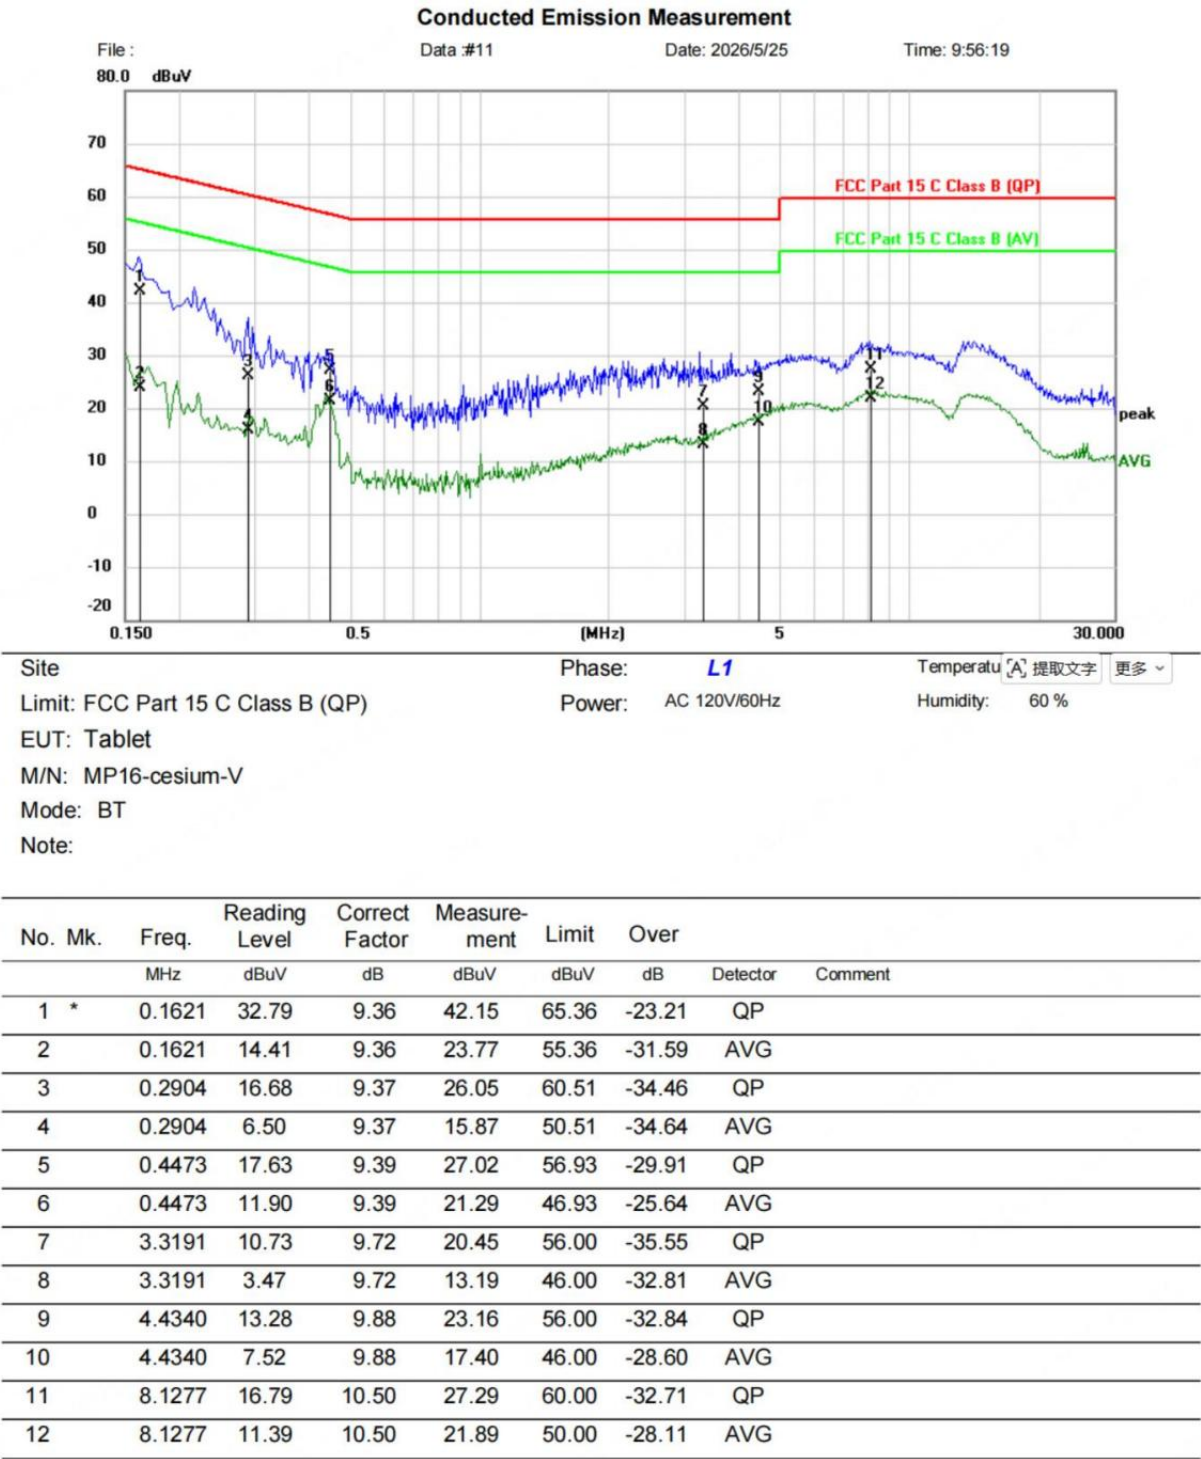

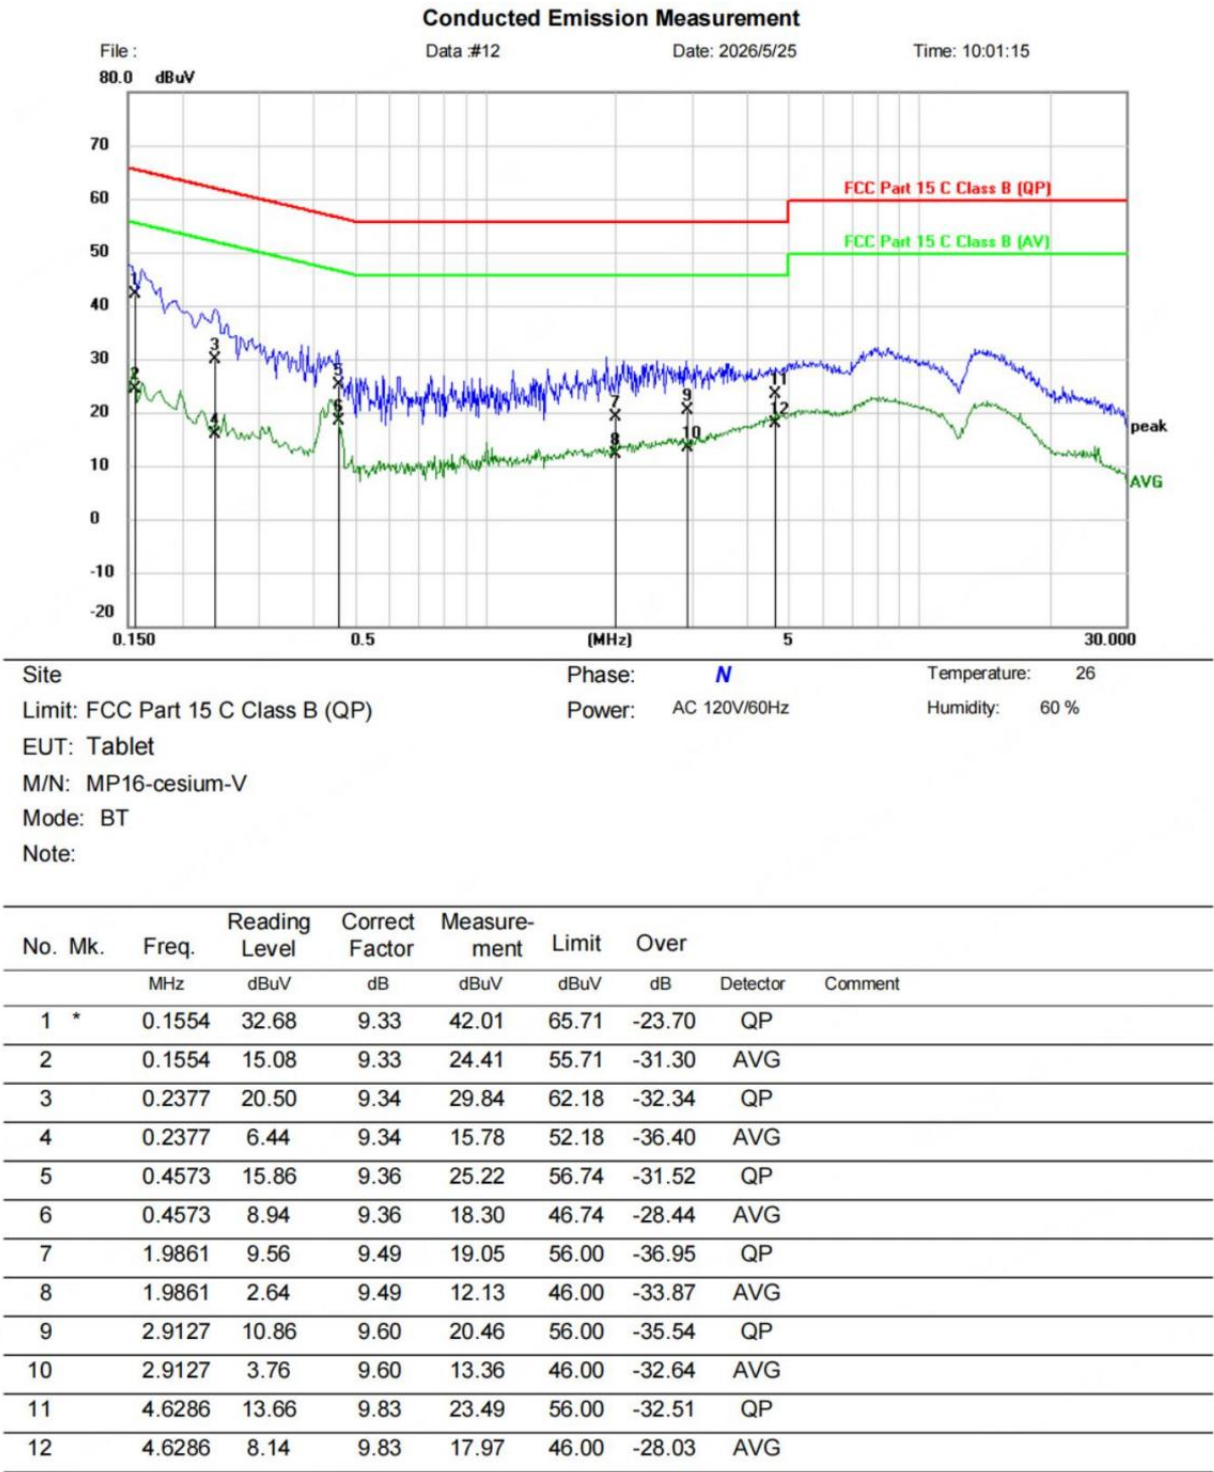

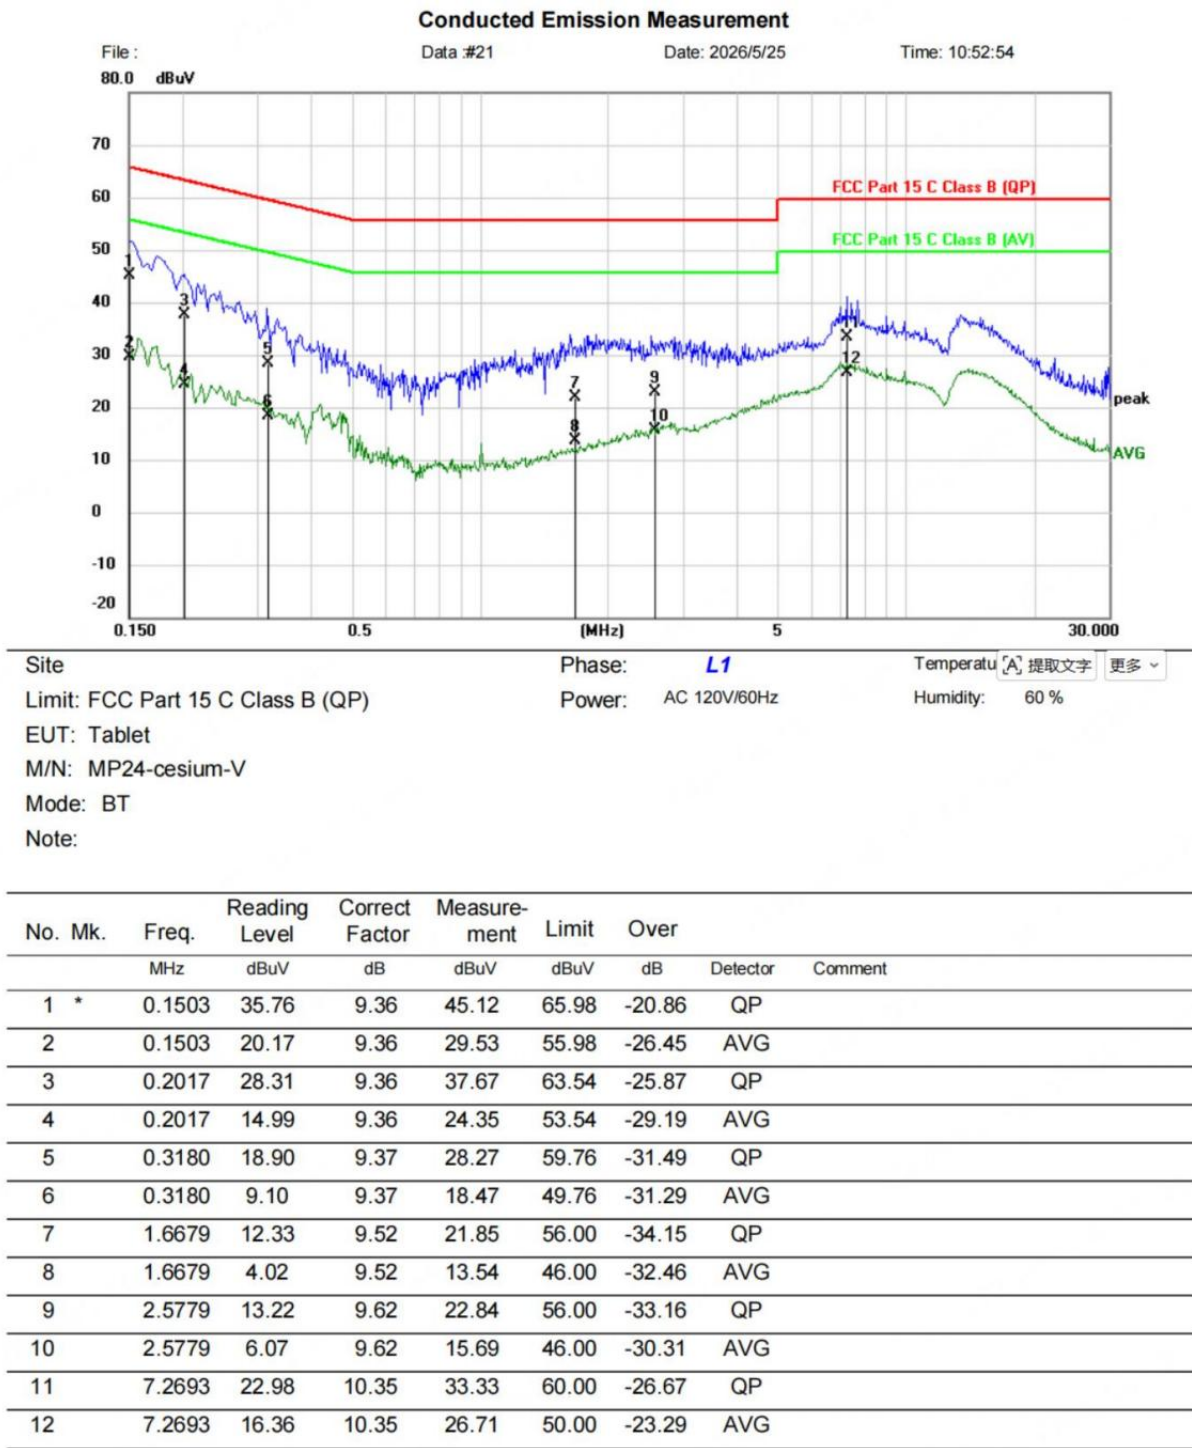

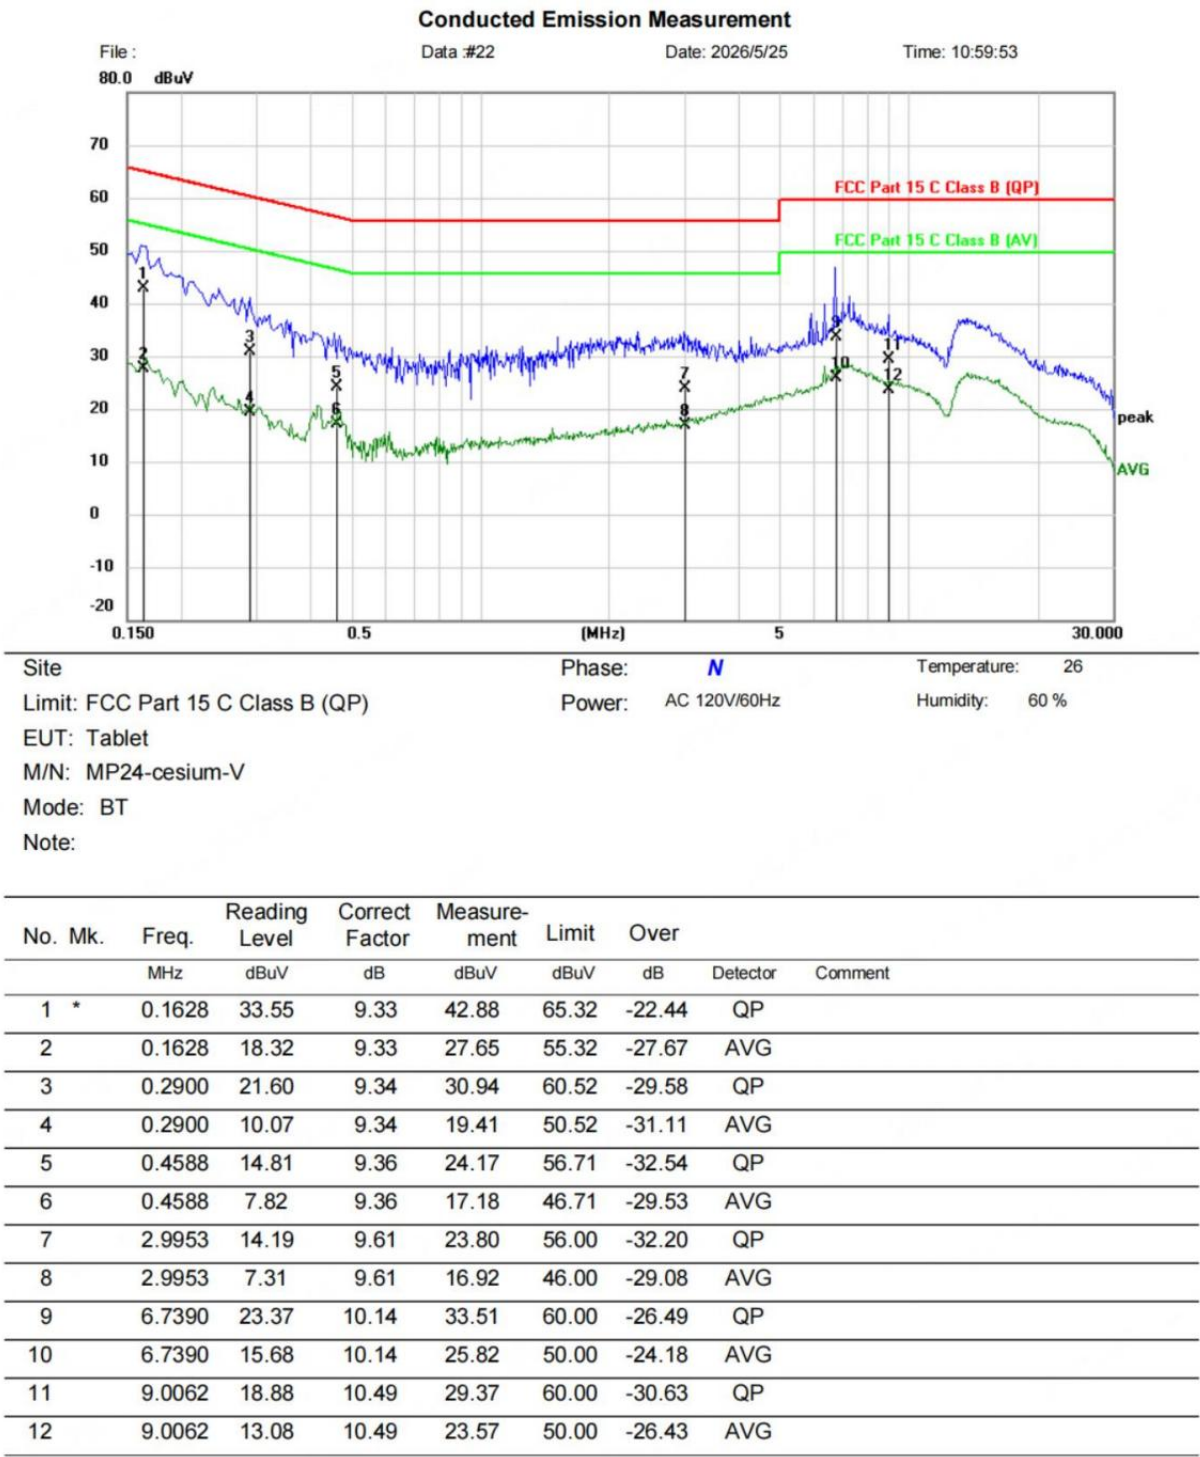

END OF REPORT