



Engineering Solutions & Electromagnetic Compatibility Services

FCC & IC Certification Report

**Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Paresh Chauhan
Phone: (434) 455-9290**

**MODEL: XL-200P (International)
Multi-Band Portable Land Mobile Radio**

**FCC ID: OWDTR-0145-E
IC: 3636B-0145**

February 3, 2016

Standards Referenced for this Report	
Part 2: 2014	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 15: 2014	Radio Frequency Devices
Part 22: 2015	Public Mobile Services
Part 74: 2015	Experimental Radio, Auxiliary, Special Broadcast and Other Program Distributional Services
Part 80: 2014	Stations in the Maritime Services
Part 90: 2014	Private Land Mobile Radio Services
TIA-603-D 2010	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
Industry Canada RSS-119 Issue 12	Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz

Report Prepared By: Daniel Baltzell

Document Number: 2015216TNF

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These test(s) are accredited under Rhein Tech Laboratories, Inc. ISO/IEC 17025 accreditation issued by the ANSI-ASQ National Accreditation Board. Refer to certificate and scope of accreditation AT-1445.

Frequency Range (MHz)	Rated Transmit Power (W) (Conducted)	Frequency Tolerance (ppm)	Transmit Mode/ Emission Designator
136-174	1-6	0.4	16K0F3E (Analog Voice; WB)
136-174	1-6	0.4	16K0F1D/E (EDACS 2-Level FSK 9600 Data/Digital Voice; WB)
136-174	1-6	0.4	11K0F3E (Analog Voice; NB)
136-174	1-6	0.4	11K7F1D/E (EDACS 2-Level FSK 9600 Data/Digital Voice; NB)
136-174	1-6	0.4	7K10F1D/E (EDACS 2-level FSK 4800; Data/Digital Voice)
136-174	1-6	0.4	8K40F1D/E (4-level C4FM Data/Voice; P25 Phase 1)
136-174	1-6	0.4	8K10DXW (4-level H-CPM (TDMA) Data/Voice; P25 Phase 2)
378-522	1-5	0.7	16K0F3E (Analog Voice; WB)
378-522	1-5	0.7	16K0F1D/E (EDACS 2-Level FSK 9600 Data/Digital Voice; WB)
378-522	1-5	0.7	11K0F3E (Analog Voice; NB)
378-522	1-5	0.7	11K7F1D/E (EDACS 2-Level FSK 9600 Data/Digital Voice; NB)
378-522	1-5	0.7	7K10F1D/E (EDACS 2-level FSK 4800; Data/Digital Voice)
378-522	1-5	0.7	8K40F1D/E (4-level C4FM Data/Voice; P25 Phase 1)
378-522	1-5	0.7	8K10DXW (4-level H-CPM (TDMA) Data/Voice; P25 Phase 2)
768-776; 798-806 ¹	0.5-3	0.8	11K0F3E (Analog Voice; NB)
768-776; 798-806 ¹	0.5-3	0.8	11K7F1D/E (EDACS 2-Level FSK 9600 Data/Digital Voice; NB)
768-776; 798-806 ¹	0.5-3	0.8	15K4F9W (OpenSky; 4-level FSK Data/Voice [SMR]; WB)
768-776; 798-806 ¹	0.5-3	0.8	8K40F9W (OpenSky; 4-level FSK Data/Voice [Narrowband]; WB)
768-776; 798-806 ¹	0.5-3	0.8	8K40F1D/E (4-level C4FM Data/Voice; P25 Phase 1)
768-776; 798-806 ¹	0.5-3	0.8	8K10DXW (4-level H-CPM (TDMA) Data/Voice; P25 Phase 2)

¹Compliance with the 2 Watt ERP maximum requirement in the itinerant frequencies of the 700 MHz band is being met without reducing conducted power due to antenna losses that reduce the ERP. See the Subpart R attestation statement. Grant power for these should be 2.6W. ERP, given the antenna losses, is less than 2W.

Frequency Range (MHz)	Rated Transmit Power (W) (Conducted)	Frequency Tolerance (ppm)	Transmit Mode/ Emission Designator
806-824; 851-869	0.5-3	0.6	16K0F3E (Analog Voice; WB)
806-824; 851-869	0.5-3	0.6	16K0F1D/E (EDACS 2-Level FSK 9600 Data/Digital Voice; WB)
806-824; 851-869	0.5-3	0.6	14K0F3E (EDACS Analog Voice) (NPSPAC)
806-824; 851-869	0.5-3	0.6	14K0F1D/E (EDACS 2-Level FSK 9600 Data/Digital Voice) (NPSPAC)
806-824; 851-869	0.5-3	0.6	11K0F3E (Analog Voice; NB)
806-824; 851-869	0.5-3	0.6	11K7F1D/E (EDACS 2-Level FSK 9600 Data/Digital Voice; NB)
806-824; 851-869	0.5-3	0.5	15K4F9W (OpenSky; 4-level FSK Data/Voice [SMR]; WB)
806-824; 851-869	0.5-3	0.5	12K1F9W (OpenSky; 4-level FSK Data/Voice [NPSPAC]; WB)
806-824; 851-869	0.5-3	0.5	8K40F9W (OpenSky; 4-level FSK Data/Voice [Narrowband]; WB)
806-824; 851-869	0.5-3	0.5	8K40F1D/E (4-level C4FM Data/Voice; P25 Phase 1)
806-824; 851-869	0.5-3	0.5	8K10DXW (4-level H-CPM (TDMA) Data/Voice; P25 Phase 2)

700 MHz Band Low Power Channels

Channel No. (6.25 kHz)	Channel No. (12.5 kHz)	12.5 kHz Channel Spaced Tx Center Frequencies	
		Original 700 MHz Band Plan (MHz)	Revised 700 MHz Band Plan (MHz)
1	1-2	764.006250	769.006250
2			
3	3-4	764.018750	769.018750
4			
5	5-6	764.031250	769.031250
6			
7	7-8	764.043750	769.043750
8			
9	9-10	764.056250	769.056250
10			
11	11-12	764.068750	769.068750
12			
949	949-950	775.931250	774.931250
950			
951	951-952	775.943750	774.943750
952			
953	953-954	775.956250	774.956250
954			
955	955-956	775.968750	774.968750
956			
957	957-958	775.981250	774.981250
958			
959	959-960	775.993750	774.993750
960			
961	961-962	794.006250	799.006250
962			
963	963-964	794.018750	799.018750
964			
965	965-966	794.031250	799.031250
966			
967	967-968	794.043750	799.043750
968			
969	969-9700	794.056250	799.056250
970			
971	971-972	794.068750	799.068750
972			
1909	1909-1910	805.931250	804.931250
1910			
1911	1911-1912	805.943750	804.943750
1912			

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Harris Corporation
 Model: XL-200P (International) Portable Radio
 IDs: - OWDTR-0145-E/3636B-0145
 Standards: FCC 22/74/80/90/IC RSS-119
 Report #: 2015216TNF

Channel No. (6.25 kHz)	Channel No. (12.5 kHz)	12.5 kHz Channel Spaced Tx Center Frequencies	
		Original 700 MHz Band Plan (MHz)	Revised 700 MHz Band Plan (MHz)
1913	1913-1914	805.956250	804.956250
1914			
1915	1915-19166	805.968750	804.968750
1916			
1917	1917-1918	805.981250	804.981250
1918			
1919	1919-19200	805.993750	804.993750
1920			

Table of Contents

1	Test Result Summary	19
2	General Information	19
2.1	Test Facility	19
2.2	Related Submittal(s)/Grant(s)	19
2.3	Grant Notes	20
2.4	Tested System Details	20
3	FCC Rules and Regulations Part 2.1033(C)(8): Voltages and Currents Through The Final Amplifying Stage	22
4	FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.541(b)/90.542(a)(6): Transmitting Power Limits; Part 80.215: Transmitter Power; Part 74.461: Transmitter Power	22
4.1	Test Procedure	22
4.2	Test Data	23
5	FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations; Part 80.217: Suppression of Interference aboard Ships	25
5.1	Test Procedure	25
5.2	Test Data	26
6	FCC Rules and Regulations Part 90.543(a): Emission Limitations: ACP Requirements	29
6.1	Test Procedure	29
6.2	Test Data	31
7	FCC Rules and Regulations Part 90.210(g) and Part 2.1053(a): Field Strength of Spurious Radiation; Part 90.543(f): Out of Band Emissions Limit	92
7.1	Test Procedure	92
7.2	Test Data	93
7.2.1	CFR 47 Part 90.210 Requirements	93
7.2.2	CFR 47 Part 90.543(f) Requirements	96
8	FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210: Authorized Bandwidth; Part 74.462: Authorized Bandwidth and Emissions	98
8.1	Test Procedure	98
8.2	Test Data	99
9	FCC Rules and Regulation Part 2.1055: Frequency Stability; Part 90.213, 90.539: Frequency Stability; Part 80.209: Frequency Stability; Part 74.464: Frequency Tolerance	345
9.1	Test Procedure	345
9.2	Test Data	347
9.2.1	Frequency Stability/Voltage Variation	358
10	FCC Part 2.1047: Modulation Characteristics; Part 80.213: Modulation Requirements; Part 74.463: Modulation Requirements	365
10.1	Test Procedures	365
10.1.1	Audio Frequency Response	365
10.1.2	Audio Low Pass Filter Response	365
10.1.3	Modulation Limiting	366
10.2	Test Data	366
10.2.1	Audio Frequency Response	366
10.2.2	Audio Low Pass Filter Response	381
10.2.3	Modulation Limiting	392
11	FCC Rules and Regulations Part 90.214: Transient Frequency Response; Part 74.462(c): Authorized Bandwidth and Emissions	430
11.1	Test Procedure	430
11.2	Test Data	431

12	FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth.....	459
13	Conclusion	461

Table of Figures

Figure 2-1:	Configuration of Tested System.....	21
-------------	-------------------------------------	----

Table of Tables

Table 2-1:	Equipment Under Test (EUT).....	20
Table 2-2:	Auxiliary Equipment	21
Table 4-1:	RF Conducted Output Power - Measured.....	23
Table 4-2:	Test Equipment Used For Testing RF Power Output - Conducted.....	24
Table 5-1:	Test Equipment Used For Testing Spurious Emissions	28
Table 6-1:	Adjacent Channel Power – 768.0125 MHz; Narrowband Analog; 400 kHz – RX band.....	31
Table 6-2:	Adjacent Channel Power – 769.0125 MHz; Narrowband Analog; 400 kHz – RX band.....	32
Table 6-3:	Adjacent Channel Power – 771.0125 MHz; Narrowband Analog; 400 kHz – RX band.....	33
Table 6-4:	Adjacent Channel Power – 775.0125 MHz; Narrowband Analog; 400 kHz – RX band.....	34
Table 6-5:	Adjacent Channel Power – 775.9875 MHz; Narrowband Analog; 400 kHz – RX band.....	35
Table 6-6:	Adjacent Channel Power – 798.0125 MHz; Narrowband Analog; 400 kHz – RX band.....	36
Table 6-7:	Adjacent Channel Power – 799.0125 MHz; Narrowband Analog; 400 kHz – RX band.....	37
Table 6-8:	Adjacent Channel Power – 801.0125 MHz; Narrowband Analog; 400 kHz – RX band.....	38
Table 6-9:	Adjacent Channel Power – 805.0125 MHz; Narrowband Analog; 400 kHz – RX band.....	39
Table 6-10:	Adjacent Channel Power – 805.9875 MHz; Narrowband Analog; 400 kHz – RX band.....	40
Table 6-11:	Adjacent Channel Power – 768.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	41
Table 6-12:	Adjacent Channel Power – 769.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	42
Table 6-13:	Adjacent Channel Power – 771.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	43
Table 6-14:	Adjacent Channel Power – 775.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	44
Table 6-15:	Adjacent Channel Power – 775.9875 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	45
Table 6-16:	Adjacent Channel Power – 798.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	46
Table 6-17:	Adjacent Channel Power – 799.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	47
Table 6-18:	Adjacent Channel Power – 801.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	48
Table 6-19:	Adjacent Channel Power – 805.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	49
Table 6-20:	Adjacent Channel Power – 805.9875 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band	50
Table 6-21:	Adjacent Channel Power – 768.0125 MHz; OTP SMR; 400 kHz – RX band	51
Table 6-22:	Adjacent Channel Power – 769.0125 MHz; OTP SMR; 400 kHz – RX band	52
Table 6-23:	Adjacent Channel Power – 771.0125 MHz; OTP SMR; 400 kHz – RX band	53
Table 6-24:	Adjacent Channel Power – 775.0125 MHz; OTP SMR; 400 kHz – RX band	54
Table 6-25:	Adjacent Channel Power – 775.9875 MHz; OTP SMR; 400 kHz – RX band	55
Table 6-26:	Adjacent Channel Power – 798.0125 MHz; OTP SMR; 400 kHz – RX band	56
Table 6-27:	Adjacent Channel Power – 799.0125 MHz; OTP SMR; 400 kHz – RX band	57
Table 6-28:	Adjacent Channel Power – 801.0125 MHz; OTP SMR; 400 kHz – RX band	58
Table 6-29:	Adjacent Channel Power – 805.0125 MHz; OTP SMR; 400 kHz – RX band	59
Table 6-30:	Adjacent Channel Power – 805.9875 MHz; OTP SMR; 400 kHz – RX band	60
Table 6-31:	Adjacent Channel Power – 768.0125 MHz; OTP Narrowband; 400 kHz – RX band	61
Table 6-32:	Adjacent Channel Power – 769.0125 MHz; OTP Narrowband; 400 kHz – RX band	62
Table 6-33:	Adjacent Channel Power – 771.0125 MHz; OTP Narrowband; 400 kHz – RX band	63
Table 6-34:	Adjacent Channel Power – 775.0125 MHz; OTP Narrowband; 400 kHz – RX band	64
Table 6-35:	Adjacent Channel Power – 775.9875 MHz; OTP Narrowband; 400 kHz – RX band	65
Table 6-36:	Adjacent Channel Power – 798.0125 MHz; OTP Narrowband; 400 kHz – RX band	66

Table 6-37:	Adjacent Channel Power – 799.0125 MHz; OTP Narrowband; 400 kHz – RX band	67
Table 6-38:	Adjacent Channel Power – 801.0125 MHz; OTP Narrowband; 400 kHz – RX band	68
Table 6-39:	Adjacent Channel Power – 805.0125 MHz; OTP Narrowband; 400 kHz – RX band	69
Table 6-40:	Adjacent Channel Power – 805.9875 MHz; OTP Narrowband; 400 kHz – RX band	70
Table 6-41:	Adjacent Channel Power – 768.0125 MHz; P25; 400 kHz – RX band	71
Table 6-42:	Adjacent Channel Power – 769.0125 MHz; P25; 400 kHz – RX band	72
Table 6-43:	Adjacent Channel Power – 771.0125 MHz; P25; 400 kHz – RX band	73
Table 6-44:	Adjacent Channel Power – 775.0125 MHz; P25; 400 kHz – RX band	74
Table 6-45:	Adjacent Channel Power – 775.9875 MHz; P25; 400 kHz – RX band	75
Table 6-46:	Adjacent Channel Power – 798.0125 MHz; P25; 400 kHz – RX band	76
Table 6-47:	Adjacent Channel Power – 799.0125 MHz; P25; 400 kHz – RX band	77
Table 6-48:	Adjacent Channel Power – 801.0125 MHz; P25; 400 kHz – RX band	78
Table 6-49:	Adjacent Channel Power – 805.0125 MHz; P25; 400 kHz – RX band	79
Table 6-50:	Adjacent Channel Power – 805.9875 MHz; P25; 400 kHz – RX band	80
Table 6-51:	Adjacent Channel Power – 768.0125 MHz; P25 Phase 2; 400 kHz – RX band	81
Table 6-52:	Adjacent Channel Power – 769.0125 MHz; P25 Phase 2; 400 kHz – RX band	82
Table 6-53:	Adjacent Channel Power – 771.0125 MHz; P25 Phase 2; 400 kHz – RX band	83
Table 6-54:	Adjacent Channel Power – 775.0125 MHz; P25 Phase 2; 400 kHz – RX band	84
Table 6-55:	Adjacent Channel Power – 775.9875 MHz; P25 Phase 2; 400 kHz – RX band	85
Table 6-56:	Adjacent Channel Power – 798.0125 MHz; P25 Phase 2; 400 kHz – RX band	86
Table 6-57:	Adjacent Channel Power – 799.0125 MHz; P25 Phase 2; 400 kHz – RX band	87
Table 6-58:	Adjacent Channel Power – 801.0125 MHz; P25 Phase 2; 400 kHz – RX band	88
Table 6-59:	Adjacent Channel Power – 805.0125 MHz; P25 Phase 2; 400 kHz – RX band	89
Table 6-60:	Adjacent Channel Power – 805.9875 MHz; P25 Phase 2; 400 kHz – RX band	90
Table 6-61:	Test Equipment Used For Testing ACP Requirements	91
Table 7-1:	Field Strength of Spurious Radiation - 378.0125 MHz.....	93
Table 7-2:	Field Strength of Spurious Radiation - 406.1000 MHz.....	93
Table 7-3:	Field Strength of Spurious Radiation - 418.0125 MHz.....	93
Table 7-4:	Field Strength of Spurious Radiation - 430.0125 MHz.....	93
Table 7-5:	Field Strength of Spurious Radiation - 450.0125 MHz.....	94
Table 7-6:	Field Strength of Spurious Radiation - 454.0125 MHz.....	94
Table 7-7:	Field Strength of Spurious Radiation - 456.0125 MHz.....	94
Table 7-8:	Field Strength of Spurious Radiation - 459.0250 MHz.....	94
Table 7-9:	Field Strength of Spurious Radiation - 459.9750 MHz.....	94
Table 7-10:	Field Strength of Spurious Radiation - 470.0125 MHz.....	95
Table 7-11:	Field Strength of Spurious Radiation – 806.0125 MHz.....	95
Table 7-12:	Field Strength of Spurious Radiation – 815 MHz.....	95
Table 7-13:	Field Strength of Spurious Radiation – 823.9875 MHz.....	95
Table 7-14:	Field Strength of Spurious Radiation – 851.0125 MHz.....	95
Table 7-15:	Field Strength of Spurious Radiation – 860 MHz.....	96
Table 7-16:	Field Strength of Spurious Radiation – 868.9875 MHz.....	96
Table 7-17:	Field Strength of Spurious Radiation	96
Table 7-18:	Test Equipment Used for Testing Field Strength of Spurious Radiation	97
Table 8-1:	Test Equipment Used for Testing Occupied Bandwidth	344
Table 9-1:	Temperature Frequency Stability – 136.0125 MHz	347
Table 9-2:	Temperature Frequency Stability – 138.0125 MHz	347
Table 9-3:	Temperature Frequency Stability – 141.0125 MHz	347
Table 9-4:	Temperature Frequency Stability – 144.0125 MHz	348
Table 9-5:	Temperature Frequency Stability – 148.0125 MHz	348
Table 9-6:	Temperature Frequency Stability – 150.0125 MHz	348
Table 9-7:	Temperature Frequency Stability – 156.8000 MHz	349
Table 9-8:	Temperature Frequency Stability – 162.0125 MHz	349
Table 9-9:	Temperature Frequency Stability – 173.9875 MHz	349

Table 9-10:	Temperature Frequency Stability – 378.0125 MHz	350
Table 9-11:	Temperature Frequency Stability – 406.1000 MHz	350
Table 9-12:	Temperature Frequency Stability – 418.0125 MHz	350
Table 9-13:	Temperature Frequency Stability – 430.0125 MHz	351
Table 9-14:	Temperature Frequency Stability – 450.0125 MHz	351
Table 9-15:	Temperature Frequency Stability – 454.0125 MHz	351
Table 9-16:	Temperature Frequency Stability – 456.0125 MHz	352
Table 9-17:	Temperature Frequency Stability – 459.0250 MHz	352
Table 9-18:	Temperature Frequency Stability – 459.9750 MHz	352
Table 9-19:	Temperature Frequency Stability – 470.0125 MHz	353
Table 9-20:	Temperature Frequency Stability – 511.9875 MHz	353
Table 9-21:	Temperature Frequency Stability – 521.9875 MHz	353
Table 9-22:	Temperature Frequency Stability – 768.0125 MHz	354
Table 9-23:	Temperature Frequency Stability – 769.0125 MHz	354
Table 9-24:	Temperature Frequency Stability – 771.0125 MHz	354
Table 9-25:	Temperature Frequency Stability – 775.0125 MHz	355
Table 9-26:	Temperature Frequency Stability – 775.9875 MHz	355
Table 9-27:	Temperature Frequency Stability – 798.0125 MHz	355
Table 9-28:	Temperature Frequency Stability – 799.0125 MHz	356
Table 9-29:	Temperature Frequency Stability – 806.0125 MHz	356
Table 9-30:	Temperature Frequency Stability – 815.0000 MHz	356
Table 9-31:	Temperature Frequency Stability – 823.9875 MHz	357
Table 9-32:	Temperature Frequency Stability – 851.0125 MHz	357
Table 9-33:	Temperature Frequency Stability – 860.0000 MHz	357
Table 9-34:	Temperature Frequency Stability – 868.9875 MHz	358
Table 9-35:	Frequency Stability/Voltage Variation – 136.0125 MHz	358
Table 9-36:	Frequency Stability/Voltage Variation – 138.0125 MHz	358
Table 9-37:	Frequency Stability/Voltage Variation – 141.0125 MHz	358
Table 9-38:	Frequency Stability/Voltage Variation – 144.0125 MHz	359
Table 9-39:	Frequency Stability/Voltage Variation – 148.0125 MHz	359
Table 9-40:	Frequency Stability/Voltage Variation – 150.0125 MHz	359
Table 9-41:	Frequency Stability/Voltage Variation – 156.8000 MHz	359
Table 9-42:	Frequency Stability/Voltage Variation – 162.0125 MHz	359
Table 9-43:	Frequency Stability/Voltage Variation – 173.9875 MHz	359
Table 9-44:	Frequency Stability/Voltage Variation – 378.0125 MHz	360
Table 9-45:	Frequency Stability/Voltage Variation – 406.1000 MHz	360
Table 9-46:	Frequency Stability/Voltage Variation – 418.0125 MHz	360
Table 9-47:	Frequency Stability/Voltage Variation – 430.0125 MHz	360
Table 9-48:	Frequency Stability/Voltage Variation – 450.0125 MHz	360
Table 9-49:	Frequency Stability/Voltage Variation – 454.0125 MHz	360
Table 9-50:	Frequency Stability/Voltage Variation – 456.0125 MHz	361
Table 9-51:	Frequency Stability/Voltage Variation – 459.0250 MHz	361
Table 9-52:	Frequency Stability/Voltage Variation – 459.9750 MHz	361
Table 9-53:	Frequency Stability/Voltage Variation – 470.0125 MHz	361
Table 9-54:	Frequency Stability/Voltage Variation – 511.9875 MHz	361
Table 9-55:	Frequency Stability/Voltage Variation – 521.9875 MHz	361
Table 9-56:	Frequency Stability/Voltage Variation – 768.0125 MHz	362
Table 9-57:	Frequency Stability/Voltage Variation – 769.0125 MHz	362
Table 9-58:	Frequency Stability/Voltage Variation – 771.0125 MHz	362
Table 9-59:	Frequency Stability/Voltage Variation – 775.0125 MHz	362
Table 9-60:	Frequency Stability/Voltage Variation – 775.9875 MHz	362
Table 9-61:	Frequency Stability/Voltage Variation – 798.0125 MHz	362
Table 9-62:	Frequency Stability/Voltage Variation – 799.0125 MHz	363

Table 9-63:	Frequency Stability/Voltage Variation – 806.0125 MHz	363
Table 9-64:	Frequency Stability/Voltage Variation – 815.0000 MHz	363
Table 9-65:	Frequency Stability/Voltage Variation – 823.9875 MHz	363
Table 9-66:	Frequency Stability/Voltage Variation – 851.0125 MHz	363
Table 9-67:	Frequency Stability/Voltage Variation – 860.0000 MHz	363
Table 9-68:	Frequency Stability/Voltage Variation – 868.9875 MHz	364
Table 9-69:	Test Equipment Used For Testing Frequency Stability.....	364
Table 10-1:	Test Equipment Used For Modulation Requirements	429
Table 11-1:	Test Equipment Used For Testing Transient Frequency Behavior	458

Table of Plots

Plot 5-1:	Spurious Emissions at Antenna Terminals – 430.0125 MHz; Narrowband; 1-4 GHz	27
Plot 6-1:	Adjacent Channel Power – 768.0125 MHz; Narrowband Analog; <400 kHz.....	31
Plot 6-2:	Adjacent Channel Power – 769.0125 MHz; Narrowband Analog; <400 kHz.....	32
Plot 6-3:	Adjacent Channel Power – 771.0125 MHz; Narrowband Analog; <400 kHz.....	33
Plot 6-4:	Adjacent Channel Power – 775.0125 MHz; Narrowband Analog; <400 kHz.....	34
Plot 6-5:	Adjacent Channel Power – 775.9875 MHz; Narrowband Analog; <400 kHz.....	35
Plot 6-6:	Adjacent Channel Power – 798.0125 MHz; Narrowband Analog; <400 kHz.....	36
Plot 6-7:	Adjacent Channel Power – 799.0125 MHz; Narrowband Analog; <400 kHz.....	37
Plot 6-8:	Adjacent Channel Power – 801.0125 MHz; Narrowband Analog; <400 kHz.....	38
Plot 6-9:	Adjacent Channel Power – 805.0125 MHz; Narrowband Analog; <400 kHz.....	39
Plot 6-10:	Adjacent Channel Power – 805.9875 MHz; Narrowband Analog; <400 kHz.....	40
Plot 6-11:	Adjacent Channel Power – 768.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz	41
Plot 6-12:	Adjacent Channel Power – 769.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz	42
Plot 6-13:	Adjacent Channel Power – 771.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz	43
Plot 6-14:	Adjacent Channel Power – 775.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz	44
Plot 6-15:	Adjacent Channel Power – 775.9875 MHz; EDACS 2-Level FSK 9600; <400 kHz	45
Plot 6-16:	Adjacent Channel Power – 798.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz	46
Plot 6-17:	Adjacent Channel Power – 799.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz	47
Plot 6-18:	Adjacent Channel Power – 801.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz	48
Plot 6-19:	Adjacent Channel Power – 805.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz	49
Plot 6-20:	Adjacent Channel Power – 805.9875 MHz; EDACS 2-Level FSK 9600; <400 kHz	50
Plot 6-21:	Adjacent Channel Power – 768.0125 MHz; OTP SMR; <400 kHz	51
Plot 6-22:	Adjacent Channel Power – 769.0125 MHz; OTP SMR; <400 kHz	52
Plot 6-23:	Adjacent Channel Power – 771.0125 MHz; OTP SMR; <400 kHz	53
Plot 6-24:	Adjacent Channel Power – 775.0125 MHz; OTP SMR; <400 kHz	54
Plot 6-25:	Adjacent Channel Power – 775.9875 MHz; OTP SMR; <400 kHz	55
Plot 6-26:	Adjacent Channel Power – 798.0125 MHz; OTP SMR; <400 kHz	56
Plot 6-27:	Adjacent Channel Power – 799.0125 MHz; OTP SMR; <400 kHz	57
Plot 6-28:	Adjacent Channel Power – 801.0125 MHz; OTP SMR; <400 kHz	58
Plot 6-29:	Adjacent Channel Power – 805.0125 MHz; OTP SMR; <400 kHz	59
Plot 6-30:	Adjacent Channel Power – 805.9875 MHz; OTP SMR; <400 kHz	60
Plot 6-31:	Adjacent Channel Power – 768.0125 MHz; OTP Narrowband; <400 kHz	61
Plot 6-32:	Adjacent Channel Power – 769.0125 MHz; OTP Narrowband; <400 kHz	62
Plot 6-33:	Adjacent Channel Power – 771.0125 MHz; OTP Narrowband; <400 kHz	63
Plot 6-34:	Adjacent Channel Power – 775.0125 MHz; OTP Narrowband; <400 kHz	64
Plot 6-35:	Adjacent Channel Power – 775.9875 MHz; OTP Narrowband; <400 kHz	65
Plot 6-36:	Adjacent Channel Power – 798.0125 MHz; OTP Narrowband; <400 kHz	66
Plot 6-37:	Adjacent Channel Power – 799.0125 MHz; OTP Narrowband; <400 kHz	67
Plot 6-38:	Adjacent Channel Power – 801.0125 MHz; OTP Narrowband; <400 kHz	68
Plot 6-39:	Adjacent Channel Power – 805.0125 MHz; OTP Narrowband; <400 kHz	69

Plot 6-40:	Adjacent Channel Power – 805.9875 MHz; OTP Narrowband; <400 kHz	70
Plot 6-41:	Adjacent Channel Power – 768.0125 MHz; P25; <400 kHz	71
Plot 6-42:	Adjacent Channel Power – 769.0125 MHz; P25; <400 kHz	72
Plot 6-43:	Adjacent Channel Power – 771.0125 MHz; P25; <400 kHz	73
Plot 6-44:	Adjacent Channel Power – 775.0125 MHz; P25; <400 kHz	74
Plot 6-45:	Adjacent Channel Power – 775.9875 MHz; P25; <400 kHz	75
Plot 6-46:	Adjacent Channel Power – 798.0125 MHz; P25; <400 kHz	76
Plot 6-47:	Adjacent Channel Power – 799.0125 MHz; P25; <400 kHz	77
Plot 6-48:	Adjacent Channel Power – 801.0125 MHz; P25; <400 kHz	78
Plot 6-49:	Adjacent Channel Power – 805.0125 MHz; P25; <400 kHz	79
Plot 6-50:	Adjacent Channel Power – 805.9875 MHz; P25; <400 kHz	80
Plot 6-51:	Adjacent Channel Power – 768.0125 MHz; P25 Phase 2; <400 kHz	81
Plot 6-52:	Adjacent Channel Power – 769.0125 MHz; P25 Phase 2; <400 kHz	82
Plot 6-53:	Adjacent Channel Power – 771.0125 MHz; P25 Phase 2; <400 kHz	83
Plot 6-54:	Adjacent Channel Power – 775.0125 MHz; P25 Phase 2; <400 kHz	84
Plot 6-55:	Adjacent Channel Power – 775.9875 MHz; P25 Phase 2; <400 kHz	85
Plot 6-56:	Adjacent Channel Power – 798.0125 MHz; P25 Phase 2; <400 kHz	86
Plot 6-57:	Adjacent Channel Power – 799.0125 MHz; P25 Phase 2; <400 kHz	87
Plot 6-58:	Adjacent Channel Power – 801.0125 MHz; P25 Phase 2; <400 kHz	88
Plot 6-59:	Adjacent Channel Power – 805.0125 MHz; P25 Phase 2; <400 kHz	89
Plot 6-60:	Adjacent Channel Power – 805.9875 MHz; P25 Phase 2; <400 kHz	90
Plot 8-1:	Occupied Bandwidth – 136.0125 MHz; Narrowband Analog (Mask D)	99
Plot 8-2:	Occupied Bandwidth – 138.0125 MHz; Narrowband Analog (Mask D)	100
Plot 8-3:	Occupied Bandwidth – 141.0125 MHz; Narrowband Analog (Mask D)	101
Plot 8-4:	Occupied Bandwidth – 144.0125 MHz; Narrowband Analog (Mask D)	102
Plot 8-5:	Occupied Bandwidth – 148.0125 MHz; Narrowband Analog (Mask D)	103
Plot 8-6:	Occupied Bandwidth – 150.0125 MHz; Narrowband Analog (Mask D)	104
Plot 8-7:	Occupied Bandwidth – 156.8000 MHz; Narrowband Analog (Mask D)	105
Plot 8-8:	Occupied Bandwidth – 162.0125 MHz; Narrowband Analog (Mask D)	106
Plot 8-9:	Occupied Bandwidth – 173.9875 MHz; Narrowband Analog (Mask D)	107
Plot 8-10:	Occupied Bandwidth – 378.0125 MHz; Narrowband Analog (Mask D)	108
Plot 8-11:	Occupied Bandwidth – 418.0125 MHz; Narrowband Analog (Mask D)	109
Plot 8-12:	Occupied Bandwidth – 430.0125 MHz; Narrowband Analog (Mask D)	110
Plot 8-13:	Occupied Bandwidth – 450.0125 MHz; Narrowband Analog (Mask D)	111
Plot 8-14:	Occupied Bandwidth – 454.0125 MHz; Narrowband Analog (Mask D)	112
Plot 8-15:	Occupied Bandwidth – 456.0125 MHz; Narrowband Analog (Mask D)	113
Plot 8-16:	Occupied Bandwidth – 459.0250 MHz; Narrowband Analog (Mask D)	114
Plot 8-17:	Occupied Bandwidth – 470.0125 MHz; Narrowband Analog (Mask D)	115
Plot 8-18:	Occupied Bandwidth – 511.9875 MHz; Narrowband Analog (Mask D)	116
Plot 8-19:	Occupied Bandwidth – 521.9875 MHz; Narrowband Analog (Mask D)	117
Plot 8-20:	Occupied Bandwidth – 806.0125 MHz; Narrowband Analog (Mask D)	118
Plot 8-21:	Occupied Bandwidth – 815.0000 MHz; Narrowband Analog (Mask D)	119
Plot 8-22:	Occupied Bandwidth – 823.9875 MHz; Narrowband Analog (Mask D)	120
Plot 8-23:	Occupied Bandwidth – 851.0125 MHz; Narrowband Analog (Mask D)	121
Plot 8-24:	Occupied Bandwidth – 860.0000 MHz; Narrowband Analog (Mask D)	122
Plot 8-25:	Occupied Bandwidth – 868.9875 MHz; Narrowband Analog (Mask D)	123
Plot 8-26:	Occupied Bandwidth – 806.0125 MHz; Narrowband Analog (Mask B)	124
Plot 8-27:	Occupied Bandwidth – 815.0000 MHz; Narrowband Analog (Mask B)	125
Plot 8-28:	Occupied Bandwidth – 823.9875 MHz; Narrowband Analog (Mask B)	126
Plot 8-29:	Occupied Bandwidth – 851.0125 MHz; Narrowband Analog (Mask B)	127
Plot 8-30:	Occupied Bandwidth – 860.0000 MHz; Narrowband Analog (Mask B)	128
Plot 8-31:	Occupied Bandwidth – 868.9875 MHz; Narrowband Analog (Mask B)	129
Plot 8-32:	Occupied Bandwidth – 806.0125 MHz; NPSPAC Analog (Mask B)	130

Plot 8-33:	Occupied Bandwidth – 815.0000 MHz; NPSPAC Analog (Mask B)	131
Plot 8-34:	Occupied Bandwidth – 823.9875 MHz; NPSPAC Analog (Mask B)	132
Plot 8-35:	Occupied Bandwidth – 851.0125 MHz; NPSPAC Analog (Mask B)	133
Plot 8-36:	Occupied Bandwidth – 860.0000 MHz; NPSPAC Analog (Mask B)	134
Plot 8-37:	Occupied Bandwidth – 868.9875 MHz; NPSPAC Analog (Mask B)	135
Plot 8-38:	Occupied Bandwidth – 136.0125 MHz; Wideband Analog (Mask B)	136
Plot 8-39:	Occupied Bandwidth – 138.0125 MHz; Wideband Analog (Mask B)	137
Plot 8-40:	Occupied Bandwidth – 141.0125 MHz; Wideband Analog (Mask B)	138
Plot 8-41:	Occupied Bandwidth – 144.0125 MHz; Wideband Analog (Mask B)	139
Plot 8-42:	Occupied Bandwidth – 148.0125 MHz; Wideband Analog (Mask B)	140
Plot 8-43:	Occupied Bandwidth – 150.0125 MHz; Wideband Analog (Mask B)	141
Plot 8-44:	Occupied Bandwidth – 156.8000 MHz; Wideband Analog (Mask B)	142
Plot 8-45:	Occupied Bandwidth – 162.0125 MHz; Wideband Analog (Mask B)	143
Plot 8-46:	Occupied Bandwidth – 173.9875 MHz; Wideband Analog (Mask B)	144
Plot 8-47:	Occupied Bandwidth – 378.0125 MHz; Wideband Analog (Mask B)	145
Plot 8-48:	Occupied Bandwidth – 418.0125 MHz; Wideband Analog (Mask B)	146
Plot 8-49:	Occupied Bandwidth – 430.0125 MHz; Wideband Analog (Mask B)	147
Plot 8-50:	Occupied Bandwidth – 450.0125 MHz; Wideband Analog (Mask B)	148
Plot 8-51:	Occupied Bandwidth – 454.0125 MHz; Wideband Analog (Mask B)	149
Plot 8-52:	Occupied Bandwidth – 456.0125 MHz; Wideband Analog (Mask B)	150
Plot 8-53:	Occupied Bandwidth – 459.0250 MHz; Wideband Analog (Mask B)	151
Plot 8-54:	Occupied Bandwidth – 470.0125 MHz; Wideband Analog (Mask B)	152
Plot 8-55:	Occupied Bandwidth – 511.9875 MHz; Wideband Analog (Mask B)	153
Plot 8-56:	Occupied Bandwidth – 521.9875 MHz; Wideband Analog (Mask B)	154
Plot 8-57:	Occupied Bandwidth – 806.0125 MHz; Wideband Analog (Mask B)	155
Plot 8-58:	Occupied Bandwidth – 815.0000 MHz; Wideband Analog (Mask B)	156
Plot 8-59:	Occupied Bandwidth – 823.9875 MHz; Wideband Analog (Mask B)	157
Plot 8-60:	Occupied Bandwidth – 851.0125 MHz; Wideband Analog (Mask B)	158
Plot 8-61:	Occupied Bandwidth – 860.0000 MHz; Wideband Analog (Mask B)	159
Plot 8-62:	Occupied Bandwidth – 868.9875 MHz; Wideband Analog (Mask B)	160
Plot 8-63:	Occupied Bandwidth – 136.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	161
Plot 8-64:	Occupied Bandwidth – 138.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	162
Plot 8-65:	Occupied Bandwidth – 141.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	163
Plot 8-66:	Occupied Bandwidth – 144.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	164
Plot 8-67:	Occupied Bandwidth – 148.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	165
Plot 8-68:	Occupied Bandwidth – 150.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	166
Plot 8-69:	Occupied Bandwidth – 156.8000 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	167
Plot 8-70:	Occupied Bandwidth – 162.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	168
Plot 8-71:	Occupied Bandwidth – 173.9875 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	169
Plot 8-72:	Occupied Bandwidth – 378.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	170
Plot 8-73:	Occupied Bandwidth – 406.1000 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	171
Plot 8-74:	Occupied Bandwidth – 418.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	172
Plot 8-75:	Occupied Bandwidth – 430.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	173
Plot 8-76:	Occupied Bandwidth – 450.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	174
Plot 8-77:	Occupied Bandwidth – 454.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	175
Plot 8-78:	Occupied Bandwidth – 456.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	176
Plot 8-79:	Occupied Bandwidth – 459.0250 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	177
Plot 8-80:	Occupied Bandwidth – 459.9750 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	178
Plot 8-81:	Occupied Bandwidth – 470.0125 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	179
Plot 8-82:	Occupied Bandwidth – 511.9875 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	180
Plot 8-83:	Occupied Bandwidth – 521.9875 MHz; EDACS Narrowband 2-level FSK 4800 (Mask D) .	181
Plot 8-84:	Occupied Bandwidth – 136.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D) .	182
Plot 8-85:	Occupied Bandwidth – 141.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D) .	183

Plot 8-86:	Occupied Bandwidth – 144.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	184
Plot 8-87:	Occupied Bandwidth – 148.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	185
Plot 8-88:	Occupied Bandwidth – 150.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	186
Plot 8-89:	Occupied Bandwidth – 156.8000 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	187
Plot 8-90:	Occupied Bandwidth – 162.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	188
Plot 8-91:	Occupied Bandwidth – 173.9875 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	189
Plot 8-92:	Occupied Bandwidth – 378.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	190
Plot 8-93:	Occupied Bandwidth – 406.1000 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	191
Plot 8-94:	Occupied Bandwidth – 418.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	192
Plot 8-95:	Occupied Bandwidth – 430.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	193
Plot 8-96:	Occupied Bandwidth – 450.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	194
Plot 8-97:	Occupied Bandwidth – 454.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	195
Plot 8-98:	Occupied Bandwidth – 456.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	196
Plot 8-99:	Occupied Bandwidth – 459.0250 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	197
Plot 8-100:	Occupied Bandwidth – 459.9750 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	198
Plot 8-101:	Occupied Bandwidth – 470.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	199
Plot 8-102:	Occupied Bandwidth – 511.9875 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	200
Plot 8-103:	Occupied Bandwidth – 521.9875 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	201
Plot 8-104:	Occupied Bandwidth – 806.0250 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	202
Plot 8-105:	Occupied Bandwidth – 809.0000 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	203
Plot 8-106:	Occupied Bandwidth – 815.9875 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	204
Plot 8-107:	Occupied Bandwidth – 851.0250 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	205
Plot 8-108:	Occupied Bandwidth – 856.0250 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	206
Plot 8-109:	Occupied Bandwidth – 860.9875 MHz; EDACS Narrowband 2-level FSK 9600 (Mask D).	207
Plot 8-110:	Occupied Bandwidth – 806.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask H).	208
Plot 8-111:	Occupied Bandwidth – 815.0000 MHz; EDACS Narrowband 2-level FSK 9600 (Mask G).	209
Plot 8-112:	Occupied Bandwidth – 823.9875 MHz; EDACS Narrowband 2-level FSK 9600 (Mask G).	210
Plot 8-113:	Occupied Bandwidth – 851.0125 MHz; EDACS Narrowband 2-level FSK 9600 (Mask H).	211
Plot 8-114:	Occupied Bandwidth – 860.0000 MHz; EDACS Narrowband 2-level FSK 9600 (Mask G).	212
Plot 8-115:	Occupied Bandwidth – 868.9875 MHz; EDACS Narrowband 2-level FSK 9600 (Mask G).	213
Plot 8-116:	Occupied Bandwidth – 806.0125 MHz; EDACS NPSPAC 2-level FSK 9600 (Mask G).....	214
Plot 8-117:	Occupied Bandwidth – 806.0125 MHz; EDACS NPSPAC 2-level FSK 9600 (Mask H).....	215
Plot 8-118:	Occupied Bandwidth – 815.0000 MHz; EDACS NPSPAC 2-level FSK 9600 (Mask G).....	216
Plot 8-119:	Occupied Bandwidth – 815.0000 MHz; EDACS NPSPAC 2-level FSK 9600 (Mask H).....	217
Plot 8-120:	Occupied Bandwidth – 823.9875 MHz; EDACS NPSPAC 2-level FSK 9600 (Mask G).....	218
Plot 8-121:	Occupied Bandwidth – 851.0125 MHz; EDACS NPSPAC 2-level FSK 9600 (Mask G).....	219
Plot 8-122:	Occupied Bandwidth – 851.0125 MHz; EDACS NPSPAC 2-level FSK 9600 (Mask H).....	220
Plot 8-123:	Occupied Bandwidth – 860.0000 MHz; EDACS NPSPAC 2-level FSK 9600 (Mask G).....	221
Plot 8-124:	Occupied Bandwidth – 868.9875 MHz; EDACS NPSPAC 2-level FSK 9600 (Mask G).....	222
Plot 8-125:	Occupied Bandwidth – 136.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	223
Plot 8-126:	Occupied Bandwidth – 138.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	224
Plot 8-127:	Occupied Bandwidth – 141.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	225
Plot 8-128:	Occupied Bandwidth – 144.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	226
Plot 8-129:	Occupied Bandwidth – 148.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	227
Plot 8-130:	Occupied Bandwidth – 150.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	228
Plot 8-131:	Occupied Bandwidth – 156.8000 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	229
Plot 8-132:	Occupied Bandwidth – 162.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	230
Plot 8-133:	Occupied Bandwidth – 173.9875 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	231
Plot 8-134:	Occupied Bandwidth – 378.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	232
Plot 8-135:	Occupied Bandwidth – 406.1000 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	233
Plot 8-136:	Occupied Bandwidth – 418.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	234
Plot 8-137:	Occupied Bandwidth – 430.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	235
Plot 8-138:	Occupied Bandwidth – 450.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	236

Plot 8-139:	Occupied Bandwidth – 454.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	237
Plot 8-140:	Occupied Bandwidth – 456.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	238
Plot 8-141:	Occupied Bandwidth – 459.0250 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	239
Plot 8-142:	Occupied Bandwidth – 459.9750 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	240
Plot 8-143:	Occupied Bandwidth – 470.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	241
Plot 8-144:	Occupied Bandwidth – 511.9875 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	242
Plot 8-145:	Occupied Bandwidth – 521.9875 MHz; EDACS Wideband 2-level FSK 9600 (Mask C)	243
Plot 8-146:	Occupied Bandwidth – 806.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask G)	244
Plot 8-147:	Occupied Bandwidth – 806.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask H)	245
Plot 8-148:	Occupied Bandwidth – 815.0000 MHz; EDACS Wideband 2-level FSK 9600 (Mask G)	246
Plot 8-149:	Occupied Bandwidth – 815.0000 MHz; EDACS Wideband 2-level FSK 9600 (Mask H)	247
Plot 8-150:	Occupied Bandwidth – 823.9875 MHz; EDACS Wideband 2-level FSK 9600 (Mask G)	248
Plot 8-151:	Occupied Bandwidth – 851.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask G)	249
Plot 8-152:	Occupied Bandwidth – 851.0125 MHz; EDACS Wideband 2-level FSK 9600 (Mask H)	250
Plot 8-153:	Occupied Bandwidth – 860.0000 MHz; EDACS Wideband 2-level FSK 9600 (Mask G)	251
Plot 8-154:	Occupied Bandwidth – 868.9875 MHz; EDACS Wideband 2-level FSK 9600 (Mask G)	252
Plot 8-155:	Occupied Bandwidth – 806.0125 MHz; OTP Narrowband 4-level FSK (Mask D)	253
Plot 8-156:	Occupied Bandwidth – 815.0000 MHz; OTP Narrowband 4-level FSK (Mask D)	254
Plot 8-157:	Occupied Bandwidth – 823.9875 MHz; OTP Narrowband 4-level FSK (Mask D)	255
Plot 8-158:	Occupied Bandwidth – 851.0125 MHz; OTP Narrowband 4-level FSK (Mask D)	256
Plot 8-159:	Occupied Bandwidth – 860.0000 MHz; OTP Narrowband 4-level FSK (Mask D)	257
Plot 8-160:	Occupied Bandwidth – 868.9875 MHz; OTP Narrowband 4-level FSK (Mask D)	258
Plot 8-161:	Occupied Bandwidth – 806.0125 MHz; OTP Narrowband 4-level FSK (Mask H)	259
Plot 8-162:	Occupied Bandwidth – 815.0000 MHz; OTP Narrowband 4-level FSK (Mask G)	260
Plot 8-163:	Occupied Bandwidth – 815.0000 MHz; OTP Narrowband 4-level FSK (Mask H)	261
Plot 8-164:	Occupied Bandwidth – 823.9875 MHz; OTP Narrowband 4-level FSK (Mask G)	262
Plot 8-165:	Occupied Bandwidth – 851.0125 MHz; OTP Narrowband 4-level FSK (Mask H)	263
Plot 8-166:	Occupied Bandwidth – 860.0000 MHz; OTP Narrowband 4-level FSK (Mask G)	264
Plot 8-167:	Occupied Bandwidth – 868.9875 MHz; OTP Narrowband 4-level FSK (Mask G)	265
Plot 8-168:	Occupied Bandwidth – 806.0125 MHz; OTP NPSPAC 4-level FSK (Mask G)	266
Plot 8-169:	Occupied Bandwidth – 815.0000 MHz; OTP NPSPAC 4-level FSK (Mask G)	267
Plot 8-170:	Occupied Bandwidth – 815.0000 MHz; OTP NPSPAC 4-level FSK (Mask H)	268
Plot 8-171:	Occupied Bandwidth – 823.9875 MHz; OTP NPSPAC 4-level FSK (Mask G)	269
Plot 8-172:	Occupied Bandwidth – 851.0125 MHz; OTP NPSPAC 4-level FSK (Mask G)	270
Plot 8-173:	Occupied Bandwidth – 851.0125 MHz; OTP NPSPAC 4-level FSK (Mask H)	271
Plot 8-174:	Occupied Bandwidth – 860.0000 MHz; OTP NPSPAC 4-level FSK (Mask G)	272
Plot 8-175:	Occupied Bandwidth – 868.9875 MHz; OTP NPSPAC 4-level FSK (Mask G)	273
Plot 8-176:	Occupied Bandwidth – 806.0125 MHz; OTP SMR 4-level FSK (Mask G)	274
Plot 8-177:	Occupied Bandwidth – 815.0000 MHz; OTP SMR 4-level FSK (Mask G)	275
Plot 8-178:	Occupied Bandwidth – 823.9875 MHz; OTP SMR 4-level FSK (Mask G)	276
Plot 8-179:	Occupied Bandwidth – 851.0125 MHz; OTP SMR 4-level FSK (Mask G)	277
Plot 8-180:	Occupied Bandwidth – 860.0000 MHz; OTP SMR 4-level FSK (Mask G)	278
Plot 8-181:	Occupied Bandwidth – 868.9875 MHz; OTP SMR 4-level FSK (Mask G)	279
Plot 8-182:	Occupied Bandwidth – 136.0125 MHz; C4FM (Mask D)	280
Plot 8-183:	Occupied Bandwidth – 141.0125 MHz; C4FM (Mask D)	281
Plot 8-184:	Occupied Bandwidth – 144.0125 MHz; C4FM (Mask D)	282
Plot 8-185:	Occupied Bandwidth – 148.0125 MHz; C4FM (Mask D)	283
Plot 8-186:	Occupied Bandwidth – 150.0125 MHz; C4FM (Mask D)	284
Plot 8-187:	Occupied Bandwidth – 156.8000 MHz; C4FM (Mask D)	285
Plot 8-188:	Occupied Bandwidth – 162.0125 MHz; C4FM (Mask D)	286
Plot 8-189:	Occupied Bandwidth – 173.9875 MHz; C4FM (Mask D)	287
Plot 8-190:	Occupied Bandwidth – 378.0125 MHz; C4FM (Mask D)	288
Plot 8-191:	Occupied Bandwidth – 418.0125 MHz; C4FM (Mask D)	289

Plot 8-192:	Occupied Bandwidth – 430.0125 MHz; C4FM (Mask D)	290
Plot 8-193:	Occupied Bandwidth – 450.0125 MHz; C4FM (Mask D)	291
Plot 8-194:	Occupied Bandwidth – 454.0125 MHz; C4FM (Mask D)	292
Plot 8-195:	Occupied Bandwidth – 456.0125 MHz; C4FM (Mask D)	293
Plot 8-196:	Occupied Bandwidth – 459.0250 MHz; C4FM (Mask D)	294
Plot 8-197:	Occupied Bandwidth – 470.0125 MHz; C4FM (Mask D)	295
Plot 8-198:	Occupied Bandwidth – 511.9875 MHz; C4FM (Mask D)	296
Plot 8-199:	Occupied Bandwidth – 521.9875 MHz; C4FM (Mask D)	297
Plot 8-200:	Occupied Bandwidth – 806.0125 MHz; C4FM (Mask D)	298
Plot 8-201:	Occupied Bandwidth – 815.0000 MHz; C4FM (Mask D)	299
Plot 8-202:	Occupied Bandwidth – 823.9875 MHz; C4FM (Mask D)	300
Plot 8-203:	Occupied Bandwidth – 851.0125 MHz; C4FM (Mask D)	301
Plot 8-204:	Occupied Bandwidth – 860.0000 MHz; C4FM (Mask D)	302
Plot 8-205:	Occupied Bandwidth – 868.9875 MHz; C4FM (Mask D)	303
Plot 8-206:	Occupied Bandwidth – 806.0125 MHz; C4FM (Mask H)	304
Plot 8-207:	Occupied Bandwidth – 815.0000 MHz; C4FM (Mask H)	305
Plot 8-208:	Occupied Bandwidth – 815.0000 MHz; C4FM (Mask G)	306
Plot 8-209:	Occupied Bandwidth – 823.9875 MHz; C4FM (Mask G)	307
Plot 8-210:	Occupied Bandwidth – 851.0125 MHz; C4FM (Mask H)	308
Plot 8-211:	Occupied Bandwidth – 860.0000 MHz; C4FM (Mask G)	309
Plot 8-212:	Occupied Bandwidth – 868.9875 MHz; C4FM (Mask G)	310
Plot 8-213:	Occupied Bandwidth – 136.0125 MHz; C4FM Phase 2 (Mask D)	311
Plot 8-214:	Occupied Bandwidth – 138.0125 MHz; C4FM Phase 2 (Mask D)	312
Plot 8-215:	Occupied Bandwidth – 141.0125 MHz; C4FM Phase 2 (Mask D)	313
Plot 8-216:	Occupied Bandwidth – 144.0125 MHz; C4FM Phase 2 (Mask D)	314
Plot 8-217:	Occupied Bandwidth – 148.0125 MHz; C4FM Phase 2 (Mask D)	315
Plot 8-218:	Occupied Bandwidth – 150.0125 MHz; C4FM Phase 2 (Mask D)	316
Plot 8-219:	Occupied Bandwidth – 156.8000 MHz; C4FM Phase 2 (Mask D)	317
Plot 8-220:	Occupied Bandwidth – 162.0125 MHz; C4FM Phase 2 (Mask D)	318
Plot 8-221:	Occupied Bandwidth – 173.9875 MHz; C4FM Phase 2 (Mask D)	319
Plot 8-222:	Occupied Bandwidth – 378.0125 MHz; C4FM Phase 2 (Mask D)	320
Plot 8-223:	Occupied Bandwidth – 406.1000 MHz; C4FM Phase 2 (Mask D)	321
Plot 8-224:	Occupied Bandwidth – 418.0125 MHz; C4FM Phase 2 (Mask D)	322
Plot 8-225:	Occupied Bandwidth – 430.0125 MHz; C4FM Phase 2 (Mask D)	323
Plot 8-226:	Occupied Bandwidth – 450.0125 MHz; C4FM Phase 2 (Mask D)	324
Plot 8-227:	Occupied Bandwidth – 454.0125 MHz; C4FM Phase 2 (Mask D)	325
Plot 8-228:	Occupied Bandwidth – 456.0125 MHz; C4FM Phase 2 (Mask D)	326
Plot 8-229:	Occupied Bandwidth – 459.0250 MHz; C4FM Phase 2 (Mask D)	327
Plot 8-230:	Occupied Bandwidth – 459.9750 MHz; C4FM Phase 2 (Mask D)	328
Plot 8-231:	Occupied Bandwidth – 470.0125 MHz; C4FM Phase 2 (Mask D)	329
Plot 8-232:	Occupied Bandwidth – 511.9875 MHz; C4FM Phase 2 (Mask D)	330
Plot 8-233:	Occupied Bandwidth – 521.9875 MHz; C4FM Phase 2 (Mask D)	331
Plot 8-234:	Occupied Bandwidth – 806.0125 MHz; C4FM Phase 2 (Mask D)	332
Plot 8-235:	Occupied Bandwidth – 815.0000 MHz; C4FM Phase 2 (Mask D)	333
Plot 8-236:	Occupied Bandwidth – 823.9875 MHz; C4FM Phase 2 (Mask D)	334
Plot 8-237:	Occupied Bandwidth – 851.0125 MHz; C4FM Phase 2 (Mask D)	335
Plot 8-238:	Occupied Bandwidth – 860.0000 MHz; C4FM Phase 2 (Mask D)	336
Plot 8-239:	Occupied Bandwidth – 868.9875 MHz; C4FM Phase 2 (Mask D)	337
Plot 8-240:	Occupied Bandwidth – 806.0125 MHz; C4FM Phase 2 (Mask H)	338
Plot 8-241:	Occupied Bandwidth – 815.0000 MHz; C4FM Phase 2 (Mask G)	339
Plot 8-242:	Occupied Bandwidth – 815.0000 MHz; C4FM Phase 2 (Mask H)	340
Plot 8-243:	Occupied Bandwidth – 823.9875 MHz; C4FM Phase 2 (Mask G)	341
Plot 8-244:	Occupied Bandwidth – 851.0125 MHz; C4FM Phase 2 (Mask H)	342

Plot 8-245:	Occupied Bandwidth – 860.0000 MHz; C4FM Phase 2 (Mask G).....	343
Plot 8-246:	Occupied Bandwidth – 868.9875 MHz; C4FM Phase 2 (Mask G).....	344
Plot 10-1:	Modulation Characteristics - Audio Frequency Response – 136.0125 MHz	366
Plot 10-2:	Modulation Characteristics - Audio Frequency Response – 144.0125 MHz	367
Plot 10-3:	Modulation Characteristics - Audio Frequency Response – 173.9875 MHz	368
Plot 10-4:	Modulation Characteristics - Audio Frequency Response – 378.0125 MHz	369
Plot 10-5:	Modulation Characteristics - Audio Frequency Response – 454.0125 MHz	370
Plot 10-6:	Modulation Characteristics - Audio Frequency Response – 521.9875 MHz	371
Plot 10-7:	Modulation Characteristics - Audio Frequency Response – 768.0125 MHz	372
Plot 10-8:	Modulation Characteristics - Audio Frequency Response – 775.9875 MHz	373
Plot 10-9:	Modulation Characteristics - Audio Frequency Response – 805.9875 MHz	374
Plot 10-10:	Modulation Characteristics - Audio Frequency Response – 806.0125 MHz	375
Plot 10-11:	Modulation Characteristics - Audio Frequency Response – 815.0000 MHz	376
Plot 10-12:	Modulation Characteristics - Audio Frequency Response – 823.9875 MHz	377
Plot 10-13:	Modulation Characteristics - Audio Frequency Response – 851.0125 MHz	378
Plot 10-14:	Modulation Characteristics - Audio Frequency Response – 860.0000 MHz	379
Plot 10-15:	Modulation Characteristics - Audio Frequency Response – 868.9875 MHz	380
Plot 10-16:	Modulation Characteristics – Audio Low Pass Filter – 136.0125 MHz	381
Plot 10-17:	Modulation Characteristics – Audio Low Pass Filter – 144.0125 MHz	382
Plot 10-18:	Modulation Characteristics – Audio Low Pass Filter – 173.9875 MHz	383
Plot 10-19:	Modulation Characteristics – Audio Low Pass Filter – 406.1000 MHz (WB)	384
Plot 10-20:	Modulation Characteristics – Audio Low Pass Filter – 454.0125 MHz (WB)	385
Plot 10-21:	Modulation Characteristics – Audio Low Pass Filter – 511.9875 MHz (NB)	386
Plot 10-22:	Modulation Characteristics – Audio Low Pass Filter – 768.0125 MHz	387
Plot 10-23:	Modulation Characteristics – Audio Low Pass Filter – 775.9875 MHz	388
Plot 10-24:	Modulation Characteristics – Audio Low Pass Filter – 805.9875 MHz	389
Plot 10-25:	Modulation Characteristics – Audio Low Pass Filter – 815.0000 MHz	390
Plot 10-26:	Modulation Characteristics – Audio Low Pass Filter – 860.0000 MHz	391
Plot 10-27:	Modulation Characteristics – Modulation Limiting – 136.0125 MHz; Positive Peak; NB	392
Plot 10-28:	Modulation Characteristics – Modulation Limiting – 136.0125 MHz; Negative Peak; NB ...	393
Plot 10-29:	Modulation Characteristics – Modulation Limiting – 144.0125 MHz; Positive Peak; NB	394
Plot 10-30:	Modulation Characteristics – Modulation Limiting – 144.0125 MHz; Negative Peak; NB ...	395
Plot 10-31:	Modulation Characteristics – Modulation Limiting – 173.9875 MHz; Positive Peak; NB	396
Plot 10-32:	Modulation Characteristics – Modulation Limiting – 173.9875 MHz; Negative Peak; NB ...	397
Plot 10-33:	Modulation Characteristics – Modulation Limiting – 378.0125 MHz; Positive Peak; NB	398
Plot 10-34:	Modulation Characteristics – Modulation Limiting – 378.0125 MHz; Negative Peak; NB ...	399
Plot 10-35:	Modulation Characteristics – Modulation Limiting – 454.0125 MHz; Positive Peak; NB	400
Plot 10-36:	Modulation Characteristics – Modulation Limiting – 454.0125 MHz; Negative Peak; NB ...	401
Plot 10-37:	Modulation Characteristics – Modulation Limiting – 521.9875 MHz; Positive Peak; NB	402
Plot 10-38:	Modulation Characteristics – Modulation Limiting - 521.9875 MHz; Negative Peak; NB	403
Plot 10-39:	Modulation Characteristics – Modulation Limiting – 768.0125 MHz; Positive Peak; NB	404
Plot 10-40:	Modulation Characteristics – Modulation Limiting - 768.0125 MHz; Negative Peak; NB	405
Plot 10-41:	Modulation Characteristics – Modulation Limiting – 775.9875 MHz; Positive Peak; NB	406
Plot 10-42:	Modulation Characteristics – Modulation Limiting - 775.9875 MHz; Negative Peak; NB	407
Plot 10-43:	Modulation Characteristics – Modulation Limiting – 805.9875 MHz; Positive Peak; NB	408
Plot 10-44:	Modulation Characteristics – Modulation Limiting – 805.9875 MHz; Negative Peak; NB ...	409
Plot 10-45:	Modulation Characteristics – Modulation Limiting – 815 MHz; Positive Peak; NB	410
Plot 10-46:	Modulation Characteristics – Modulation Limiting – 815 MHz; Negative Peak; NB	411
Plot 10-47:	Modulation Characteristics – Modulation Limiting - 860 MHz; Positive Peak; NB	412
Plot 10-48:	Modulation Characteristics – Modulation Limiting - 860 MHz; Negative Peak; NB	413
Plot 10-49:	Modulation Characteristics – Modulation Limiting – 136.0125 MHz; Positive Peak; WB	414
Plot 10-50:	Modulation Characteristics – Modulation Limiting – 136.0125 MHz; Negative Peak; WB...	415
Plot 10-51:	Modulation Characteristics – Modulation Limiting – 144.0125 MHz; Positive Peak; WB	416

Plot 10-52:	Modulation Characteristics – Modulation Limiting – 144.0125 MHz; Negative Peak; WB...	417
Plot 10-53:	Modulation Characteristics – Modulation Limiting – 173.9875 MHz; Positive Peak; WB	418
Plot 10-54:	Modulation Characteristics – Modulation Limiting – 173.9875 MHz; Negative Peak; WB...	419
Plot 10-55:	Modulation Characteristics – Modulation Limiting – 378.0125 MHz; Positive Peak; WB	420
Plot 10-56:	Modulation Characteristics – Modulation Limiting – 378.0125 MHz; Negative Peak; WB...	421
Plot 10-57:	Modulation Characteristics – Modulation Limiting – 454.0125 MHz; Positive Peak; WB	422
Plot 10-58:	Modulation Characteristics – Modulation Limiting – 454.0125 MHz; Negative Peak; WB...	423
Plot 10-59:	Modulation Characteristics – Modulation Limiting – 521.9875 MHz; Positive Peak; WB	424
Plot 10-60:	Modulation Characteristics – Modulation Limiting - 521.9875 MHz; Negative Peak; WB ...	425
Plot 10-61:	Modulation Characteristics – Modulation Limiting – 815 MHz; Positive Peak; WB	426
Plot 10-62:	Modulation Characteristics – Modulation Limiting – 815 MHz; Negative Peak; WB.....	427
Plot 10-63:	Modulation Characteristics – Modulation Limiting - 860 MHz; Positive Peak; WB	428
Plot 10-64:	Modulation Characteristics – Modulation Limiting - 860 MHz; Negative Peak; WB	429
Plot 11-1:	Transient Frequency Behavior – 150.0125 MHz; Wide Band; Carrier ON Time	431
Plot 11-2:	Transient Frequency Behavior – 150.0125 MHz; Wide Band; Carrier OFF Time	432
Plot 11-3:	Transient Frequency Behavior – 150.0125 MHz; Narrow Band; Carrier ON Time	433
Plot 11-4:	Transient Frequency Behavior – 150.0125 MHz; Narrow Band; Carrier OFF Time	434
Plot 11-5:	Transient Frequency Behavior – 156.8000 MHz; Wide Band; Carrier ON Time	435
Plot 11-6:	Transient Frequency Behavior – 156.8000 MHz; Wide Band; Carrier OFF Time	436
Plot 11-7:	Transient Frequency Behavior – 156.8000 MHz; Narrow Band; Carrier ON Time	437
Plot 11-8:	Transient Frequency Behavior – 156.8000 MHz; Narrow Band; Carrier OFF Time	438
Plot 11-9:	Transient Frequency Behavior – 162.0125 MHz; Wide Band; Carrier ON Time	439
Plot 11-10:	Transient Frequency Behavior – 162.0125 MHz; Wide Band; Carrier OFF Time	440
Plot 11-11:	Transient Frequency Behavior – 162.0125 MHz; Narrow Band; Carrier ON Time	441
Plot 11-12:	Transient Frequency Behavior – 162.0125 MHz; Narrow Band; Carrier OFF Time	442
Plot 11-13:	Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier ON Time	443
Plot 11-14:	Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier OFF Time	444
Plot 11-15:	Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier ON Time	445
Plot 11-16:	Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier OFF Time	446
Plot 11-17:	Transient Frequency Behavior – 430.0125 MHz; Wide Band; Carrier ON Time	447
Plot 11-18:	Transient Frequency Behavior – 430.0125 MHz; Wide Band; Carrier OFF Time	448
Plot 11-19:	Transient Frequency Behavior – 430.0125 MHz; Narrow Band; Carrier ON Time	449
Plot 11-20:	Transient Frequency Behavior – 430.0125 MHz; Narrow Band; Carrier OFF Time	450
Plot 11-21:	Transient Frequency Behavior – 470.0125 MHz; Wide Band; Carrier ON Time	451
Plot 11-22:	Transient Frequency Behavior – 470.0125 MHz; Wide Band; Carrier OFF Time	452
Plot 11-23:	Transient Frequency Behavior – 470.0125 MHz; Narrow Band; Carrier ON Time	453
Plot 11-24:	Transient Frequency Behavior – 470.0125 MHz; Narrow Band; Carrier OFF Time	454
Plot 11-25:	Transient Frequency Behavior – 511.9875 MHz; Wide Band; Carrier ON Time	455
Plot 11-26:	Transient Frequency Behavior – 511.9875 MHz; Wide Band; Carrier OFF Time	456
Plot 11-27:	Transient Frequency Behavior – 511.9875 MHz; Narrow Band; Carrier ON Time	457
Plot 11-28:	Transient Frequency Behavior – 511.9875 MHz; Narrow Band; Carrier OFF Time	458

Table of Appendixes

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093: RF Exposure	462
Appendix B:	FCC Agency Authorization	463
Appendix C:	FCC & IC Short-Term and Permanent Confidentiality Request Letter	464
Appendix D:	IC Letters	465
Appendix E:	Canadian-Based Representative Attestation	466
Appendix F:	Extended Frequency Attestation	467
Appendix G:	Part 90 Subpart R Application Review	468
Appendix H:	AFC Attestation	469
Appendix I:	Label Information	470
Appendix K:	Operational Description	472
Appendix L:	Parts List	473
Appendix M:	Test / Tune Procedure	474
Appendix N:	Schematics	475
Appendix O:	Block Diagram	476
Appendix P:	Manual	477
Appendix Q:	Test Configuration Photographs	478
Appendix R:	External Photographs	482
Appendix S:	Internal Photographs	486

Table of Photographs

Photograph 1:	ID Label Sample with RF Statement	470
Photograph 2:	ID Label Location	471
Photograph 3:	Radiated Emissions – Front View (below 1 GHz)	478
Photograph 4:	Radiated Emissions – Back View (below 1 GHz)	479
Photograph 5:	Radiated Emissions – Front View (above 1 GHz)	480
Photograph 6:	Radiated Emissions – Back View (above 1 GHz)	481
Photograph 7:	Front	482
Photograph 8:	Back	483
Photograph 9:	Top	484
Photograph 10:	Side Views	485
Photograph 11:	Top with Shields	486
Photograph 12:	Bottom with Shields	486
Photograph 13:	Top without Shields	487
Photograph 14:	Bottom without Shields	487

1 Test Result Summary

Test	FCC & IC References	Result
RF Power Output	FCC 2.1046(a), 90.541(b), 90.542(a)(6), 80.215, 74.461 IC RSS-119 5.4	Compliant
Spurious Emissions at Antenna Terminals	FCC 2.1051, 90.210, 80.217, IC RSS-119 5.8:	Compliant
Field Strength of Spurious Radiation	FCC 2.1053(a), 90.543(c), (d), and (f) IC RSS-119 5.8, IC RSS-119 5.11	Compliant
Occupied Bandwidth/Emission Masks	FCC 2.1049(c)(1), 22.359(b), 80.205, 90.210, 74.462 IC RSS-119 5.8	Compliant
Adjacent Channel Power	FCC 90.543(b) IC RSS-119 5.8.9	Compliant
Frequency Stability vs. Temperature and Voltage	FCC 2.1055, 90.213, 90.539, 80.209, 74.464 IC RSS-119 5.3	Compliant
Modulation Characteristics	FCC 2.1047(a)(b), 80.213, 74.463	Compliant
Transient Frequency Response	FCC 90.214, 74.462(c) IC RSS-119 5.9	Compliant
Unintentional Digital/Receive Emissions	FCC 15B	Compliant

2 General Information

The following Certification Report is prepared on behalf of **Harris Corporation** in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **XL-200P (International) Multi-Band Portable Land Mobile Radio; FCC ID: OWDTR-0145-E, IC: 3636B-0145.**

The radio is subject to FCC DoC. DoC testing was performed and the data is contained in a separate DoC report.

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 §2, 15, 22, 74, 80, and 90. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

This is an Industry Canada Family Certification application, which includes 8 model numbers under IC: 3636B-0145:

XL-PFM2M	XL-PFM2Y	XL-PFM2B	XL-PFM2G
XL-PPM2M	XL-PPM2Y	XL-PPM2B	XL-PPM2G

2.3 Grant Notes

Manufacturer's Rated Power:

VHF: 6W,
UHF: 5W
700 MHz Bands: 3W
800 MHz Bands: 3W

2.4 Tested System Details

The test sample was received on December 18, 2015. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

The EUT includes a System model and a Scan model, the difference being that the System model has a DTMF keypad. The System model is considered to be representative of the radio family and to have the worst case emissions, and was therefore used for testing.

The device was programmed for multiple modes of operation and modulation types.


Table 2-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Radio	Harris Corporation	XL-PFM2M (System)	14035-1000-51/ A40304000045	OWDTR-0145-E	21965

Table 2-2: Auxiliary Equipment

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
AC Adapter	FP	FWA020012A	002844	N/A	21549
Charger	Harris Corporation	Single Bay Charger	14035-1800-01/ 00060	N/A	21550
Speaker/ Microphone	Harris Corporation	EM105	N/A	N/A	21563
Full-Spectrum Multiband Antenna	Harris Corporation	14035-4000-01	T1-11	N/A	21556
Antenna (762-870 MHz)	Harris Corporation	14035-4440-02	N/A	N/A	21719
7.2V Li-Ion Battery	Harris Corporation	Li-Ion	22	N/A	21551
7.2V Li-Ion Battery	Harris Corporation	BAT	L-CASE-R-HR003	N/A	21552
Battery Eliminator	Harris Corporation	N/A	14035-4300-01	N/A	21553
Audio Breakout	Harris Corporation	12082-7980-01	ENG027	N/A	20599
Power Supply	Alinco	DM-33MVT 32A	1638	N/A	901124

Figure 2-1: Configuration of Tested System

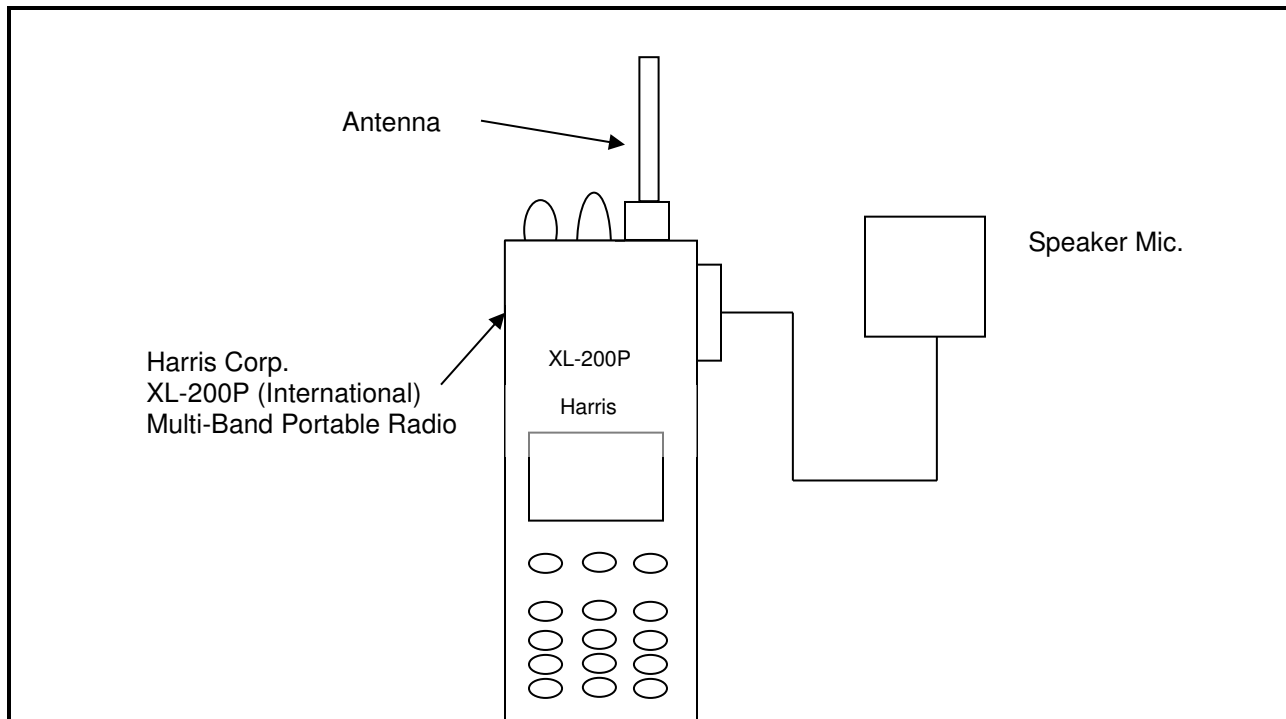

3 FCC Rules and Regulations Part 2.1033(C)(8): Voltages and Currents Through The Final Amplifying Stage

VHF: 7.4 V / 1.88 A
UHF: 7.4 V / 1.94 A
700 MHz: 7.4 V / 1.79 A
800 MHz: 7.4 V / 1.55 A

4 FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.541(b)/ 90.542(a)(6): Transmitting Power Limits; Part 80.215: Transmitter Power; Part 74.461: Transmitter Power

4.1 Test Procedure

TIA-603-D 2010, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

§74.461 Transmitter Power

(a) Transmitter power is the power at the transmitter output terminals and delivered to the antenna, antenna transmission line, or any other impedance-matched, radio frequency load. For the purpose of this Subpart, the transmitter power is the carrier power.

(b) The authorized transmitter power for a remote pickup broadcast station shall be limited to that necessary for satisfactory service and, in any event, shall not be greater than 100 watts, except that a station to be operated aboard an aircraft shall normally be limited to a maximum authorized power of 15 watts. Specific authorization to operate stations on board aircraft with an output power exceeding 15 watts will be issued only upon an adequate engineering showing of need, and of the procedures that will be taken to avoid harmful interference to other licensees.

§80.215 Transmitter Power

(a) Transmitter power shown on the radio station authorization is the maximum power the licensee is authorized to use. Power is expressed in the following terms:

(5) For all other emissions: the carrier power multiplied by 1.67.

(e) Ship stations frequencies above 27500 kHz:

The maximum power must not exceed the values listed below.

(1) Ship stations 156–162 MHz: 25W

(2) Marine utility stations and hand-held portable transmitters: 156–162 MHz: 10W

Maximum Power Authorized to use: 10.02W for VHF, 8.35W for UHF

Manufacturer's Rated Power:

VHF: 6W

UHF: 5W

700 MHz Bands: 3W

800 MHz Bands: 3W

4.2 Test Data

Table 4-1: RF Conducted Output Power - Measured

Frequency (MHz)	Power (dBm)	Power (W)
136.0125	37.8	6.0
138.0125	37.9	6.2
141.0125	38.2	6.6
144.0125	38.3	6.8
148.0125	38.3	6.8
150.0125	38.3	6.8
156.8000	38.2	6.7
162.0125	38.1	6.5
173.9875	38.3	6.8
378.0125	37.5	5.6
406.1000	37.4	5.5
418.0125	37.3	5.4
430.0125	37.3	5.4
450.0125	37.4	5.5
454.0125	37.4	5.5
456.0125	37.4	5.5
459.0250	37.3	5.4
459.9750	37.3	5.4
470.0125	37.4	5.5
511.9875	37.3	5.4
521.9875	37.3	5.4
768.0125	34.3	2.7
769.0125	34.4	2.8
771.0125	34.4	2.8
775.0125	34.4	2.8
775.9875	34.4	2.8
798.0125	34.4	2.8
799.0125	34.4	2.8
806.0125	34.9	3.1
815.0000	35.0	3.2
823.9875	35.0	3.2
851.0125	35.0	3.2
860.0000	34.9	3.1
868.9875	34.9	3.1
806.0125	34.9	3.1
815.0000	35.0	3.2
823.9875	35.0	3.2

Notes: Data presented is for Analog mode. All other modes were investigated and found to have equivalent power within measurement tolerances.

Table 4-2: Test Equipment Used For Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/16
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	9/10/16
901536	Weinschel Corporation	48-40-34	Attenuator DC-18 GHz 40 dB 100W	CB6627	9/11/16

Test Personnel:

Daniel Baltzell		December 13, 2014; January 8, 2016
EMC Test Engineer	Signature	Dates of Test

5 FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations; Part 80.217: Suppression of Interference aboard Ships

5.1 Test Procedure

TIA-603-D 2010, Section 2.2.13

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

§80.217 Suppression of Interference aboard Ships

(a) A voluntarily equipped ship station receiver must not cause harmful interference to any receiver required by statute or treaty.

(b) The electromagnetic field from receivers required by statute or treaty must not exceed the following value at a distance over sea water of one nautical mile from the receiver:

Frequency of Interfering Emissions	Power to Artificial Antenna in Microwatts
Below 30 MHz	0.1
30 to 100 MHz	3
100 to 300 MHz	1.0
Over 300 MHz	3.0

or

Deliver not more than the following amounts of power, to an artificial antenna having electrical characteristics equivalent to those of the average receiving antenna(s) use on shipboard:

Frequency of Interfering Emissions	Power to Artificial Antenna in Microwatts
Below 30 MHz	400 (4 dBm)
30 to 100 MHz	4,000 (6 dBm)
100 to 300 MHz	40,000 (16 dBm)
Over 300 MHz	400,000 (26 dBm)

5.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to $10 \times F_c$

Limits: $(43 + 10 \text{ LOG } P(W))$ for wideband and $50 + 10 \text{ LOG } P(W)$ for narrowband

The following channels (in MHz) were investigated:

VHF: 136.0125, 138.0125, 141.0125, 144.0125, 148.0125, 150.0125, 156.8000, 162.0125, and 173.9875

UHF: 378.0125, 406.1000, 418.0125, 430.0125, 450.0125, 454.0125, 456.0125, 459.0250, 459.9750,
470.0125, 511.9875, and 521.9875

700 MHz: 768.0125, 769.0125, 771.0125, 775.0125, 775.9875, 798.0125, 799.0125, 801.0125, 805.0125,
805.9875

800 MHz: 806.0125, 815.0000, 823.9875, 851.0125, 860.0000, and 868.9875

Both high and low power settings were checked; high power was found to be worst case. All modes were investigated and analog mode is presented as representative data.

All frequencies were found to be greater than 20 dB below the limit except 430.0125 MHz, Narrowband, 1-4 GHz, shown in Plot 5-1 on the following page.

Plot 5-1: Spurious Emissions at Antenna Terminals – 430.0125 MHz; Narrowband; 1-4 GHz

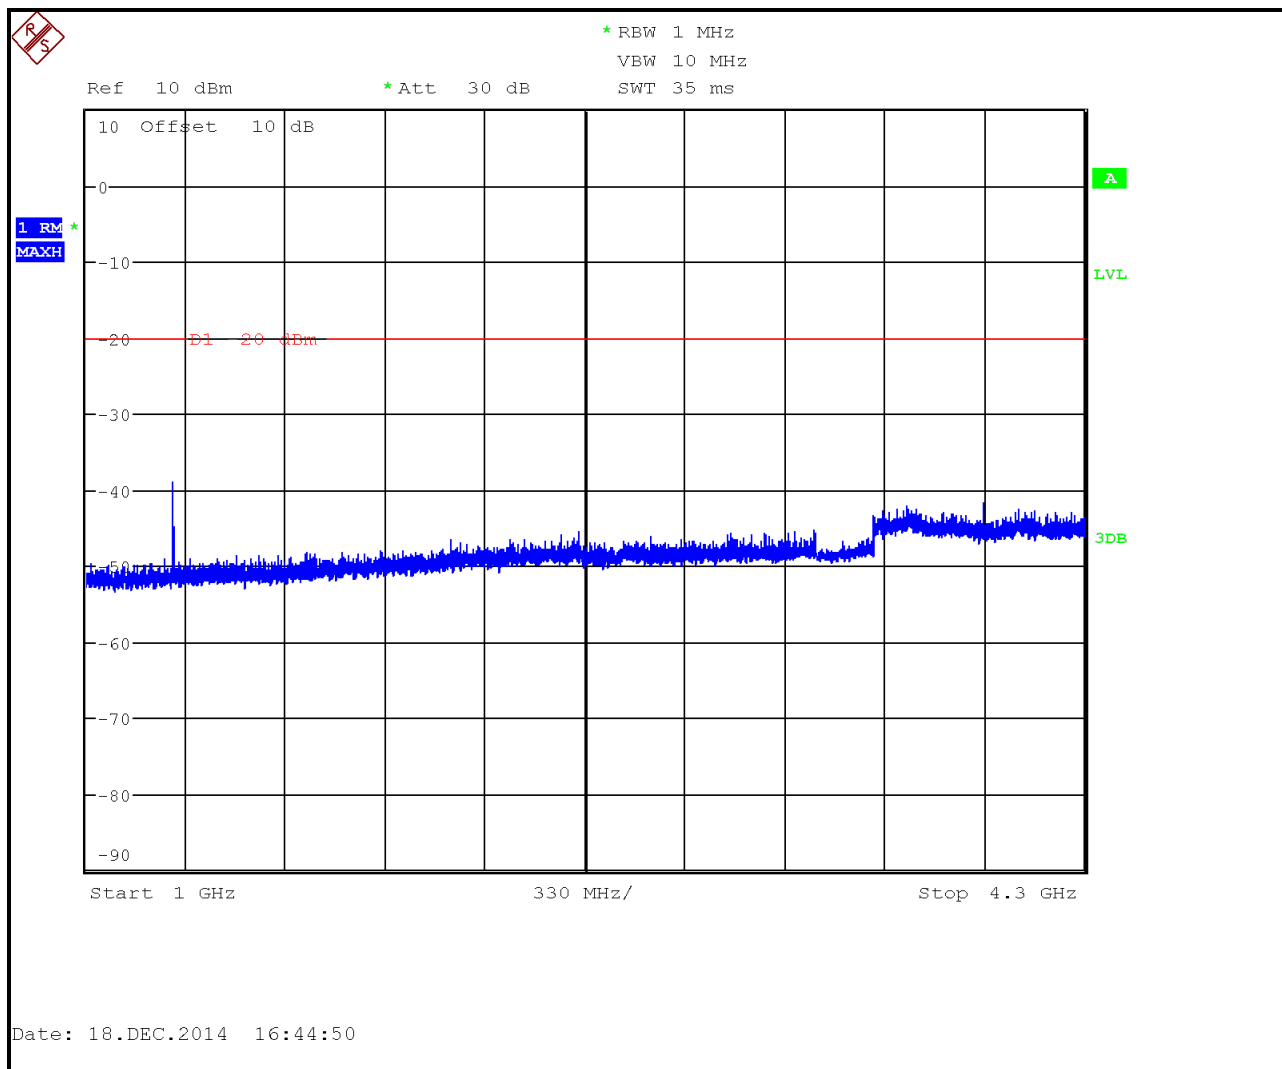


Table 5-1: Test Equipment Used For Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901129	Par Electronics	188-174 (25W)	VHF Notch Filters	N/A	9/16/16
901135	Par Electronics	400-512 (25W)	UHF Notch Filter	N/A	9/16/16
901128	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	9/16/16
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/16
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	9/10/16
900819	Weinschel Corporation	2	10 dB Attenuator; 5 W	BF0830	9/10/16
901536	Weinschel Corporation	48-40-34	Attenuator DC-18 GHz 40 dB 100W	CB6627	9/11/16

Test Personnel:

Daniel Baltzell		December 18, 2014 and January 8, 2016
EMC Test Engineer	Signature	Date of Test

6 FCC Rules and Regulations Part 90.543(a): Emission Limitations: ACP Requirements

Effective October 23, 2007, transmitters designed to operate in the 769–775 MHz and 799–805 MHz frequency bands must meet the emission limitations in paragraphs (a) through (d) of this section. Transmitters operating in the 763–768 MHz and 793–798 MHz bands must meet the emission limitations in (e) of this section.

6.1 Test Procedure

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

For a Portable transmitter designed to operate with a 12.5 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)9.375	6.25	-40
(+/-)15.625	6.25	-60
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

For a Portable transmitter designed to operate with a 25 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)15.625	6.25	-40
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

FCC Rules and Regulations Part 90.543(b)

Setting Reference Level - Part 90.543(b)(1): Using a spectrum analyzer capable of ACP measurements, set the measurement bandwidth to the channel size. Set the frequency offset of the measurement to zero and adjust the center frequency of the spectrum analyzer to give the power level in the measurement bandwidth. Record this power as the reference power level.

Measuring the power level at the frequency offset <400 kHz - Part 90.543(b)(2): Using a spectrum analyzer capable of adjacent channel power (ACP) measurements, set the measurement bandwidth as shown in table. Measure ACP in dBm. These measurements are made at maximum power. Calculate the coupled power by subtracting the measurements made in this step from the reference power level. The absolute ACP values must be less than the values given in the table for each condition.

Measuring the power level at the frequency offset >400 kHz - Part 90.543(b)(3): Set the spectrum analyzer to 30 kHz resolution bandwidth, 1 MHz video bandwidth and sample detection mode. Sweep +/- 6 MHz from the carrier frequency. Set the reference level to the RMS value of the transmitter power and note the power. The response at frequencies >400 kHz must be less than the values listed in the table.

6.2 Test Data

Plot 6-1: Adjacent Channel Power – 768.0125 MHz; Narrowband Analog; <400 kHz

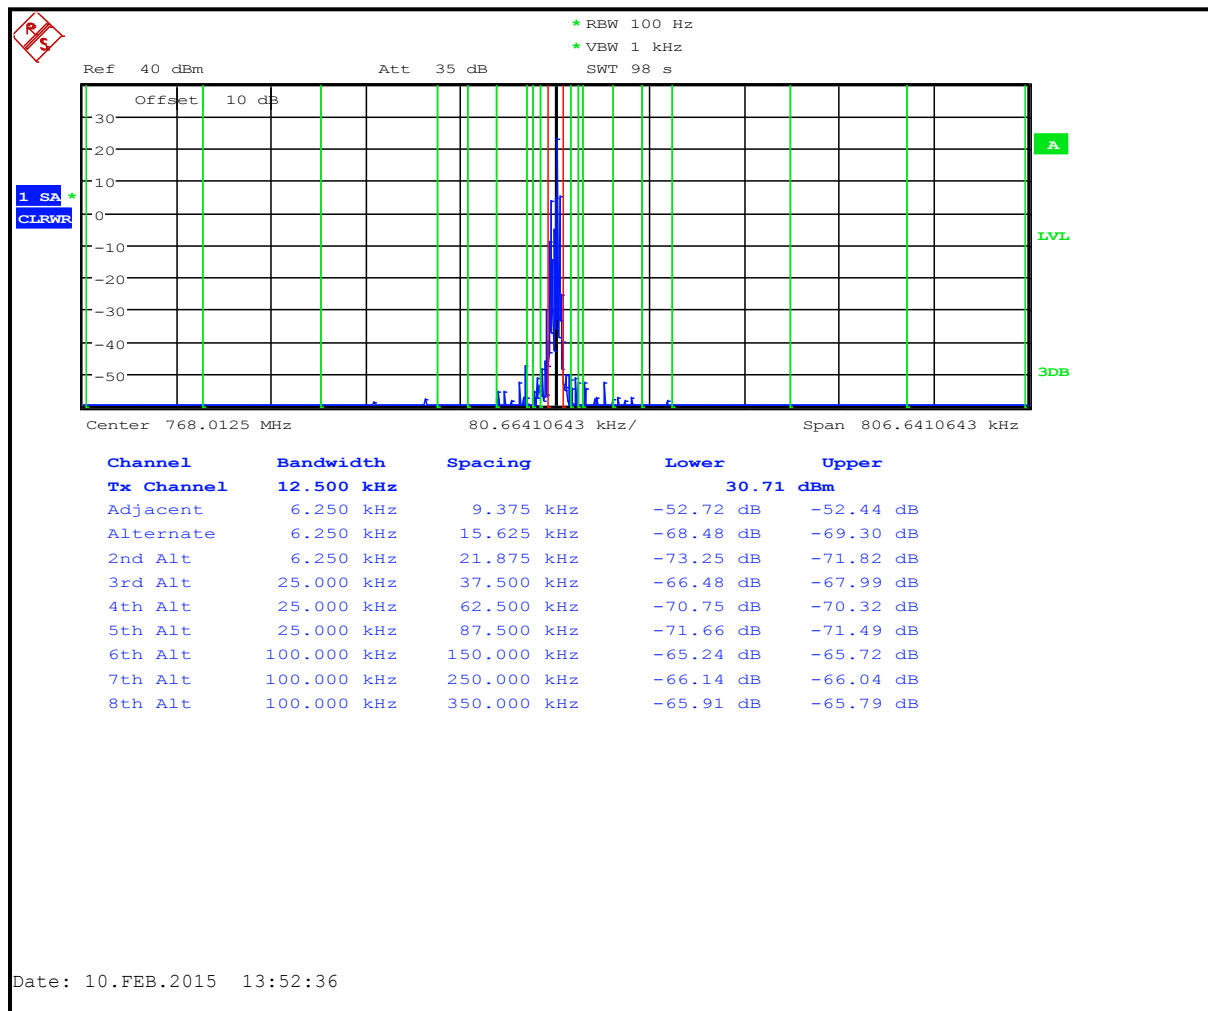


Table 6-1: Adjacent Channel Power – 768.0125 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-82.1
12 MHz to receive band	30(s)	-75	-102.5
In receive band	30(s)	-100	-111.8

Plot 6-2: Adjacent Channel Power – 769.0125 MHz; Narrowband Analog; <400 kHz

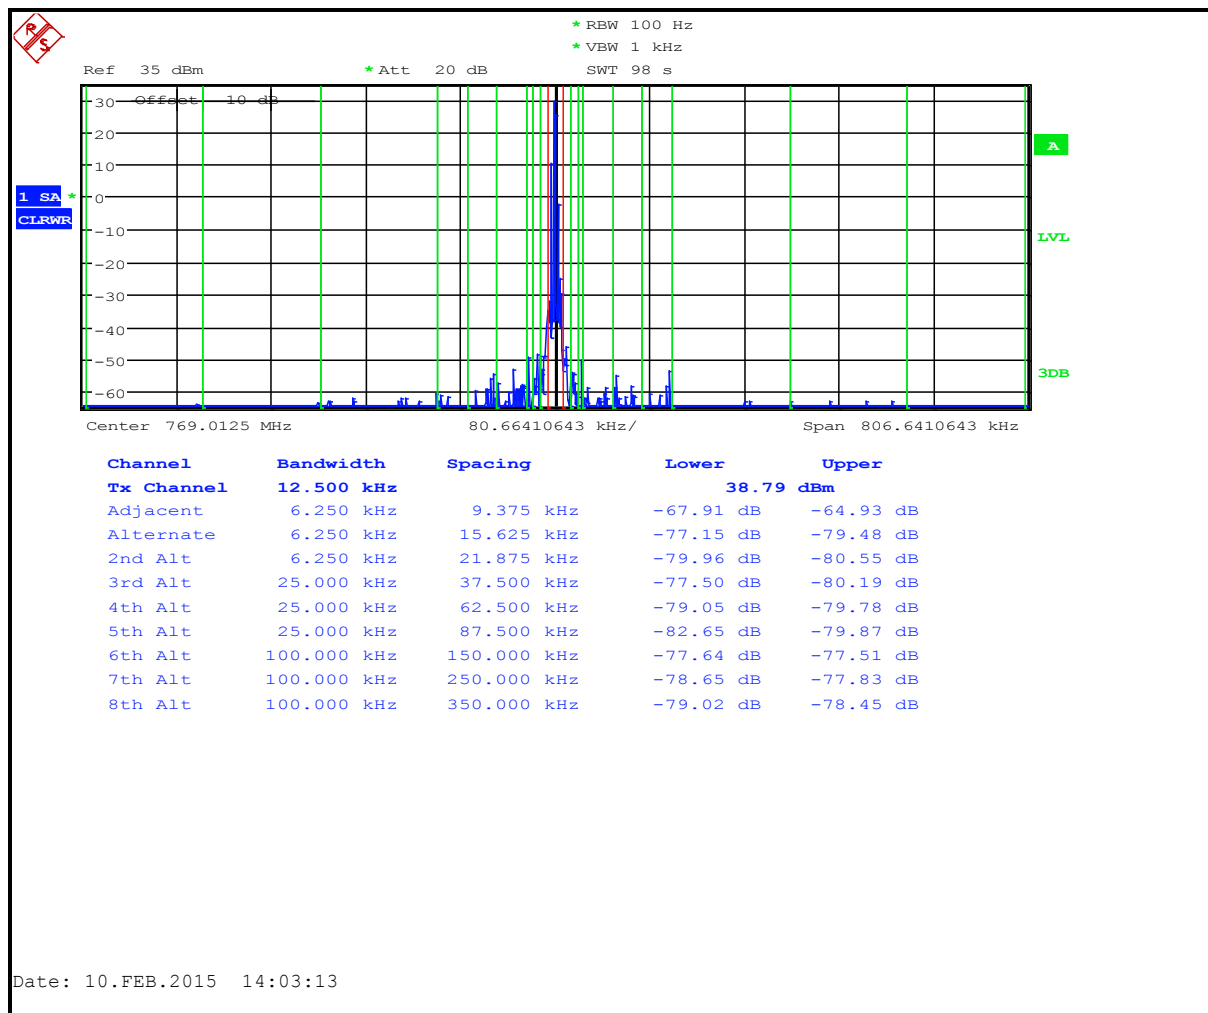


Table 6-2: Adjacent Channel Power – 769.0125 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.7
12 MHz to receive band	30(s)	-75	-105.3
In receive band	30(s)	-100	-111.9

Plot 6-3: Adjacent Channel Power – 771.0125 MHz; Narrowband Analog; <400 kHz

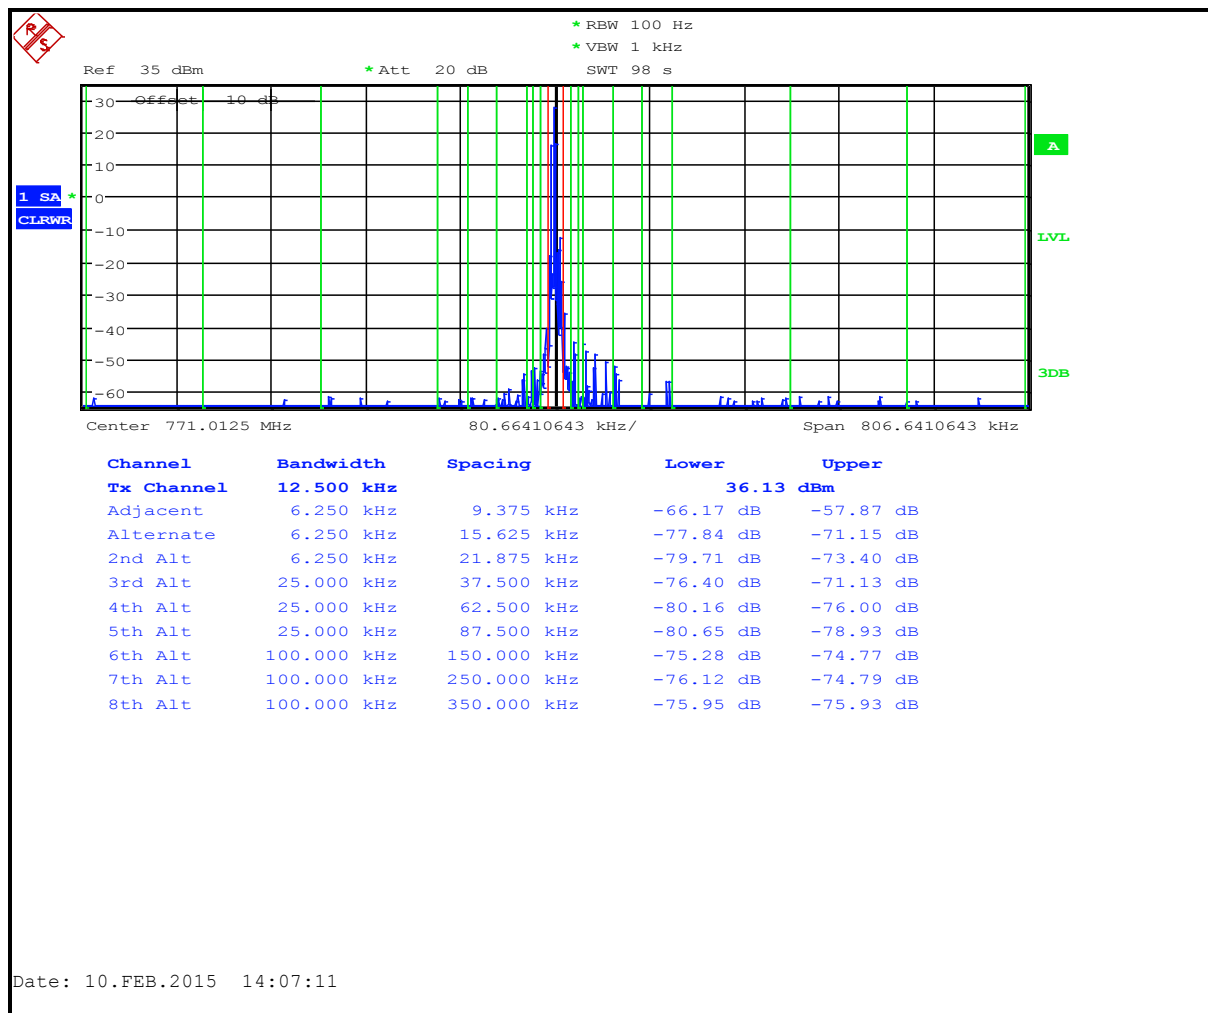


Table 6-3: Adjacent Channel Power – 771.0125 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.4
12 MHz to receive band	30(s)	-75	-107.3
In receive band	30(s)	-100	-111.2

Plot 6-4: Adjacent Channel Power – 775.0125 MHz; Narrowband Analog; <400 kHz

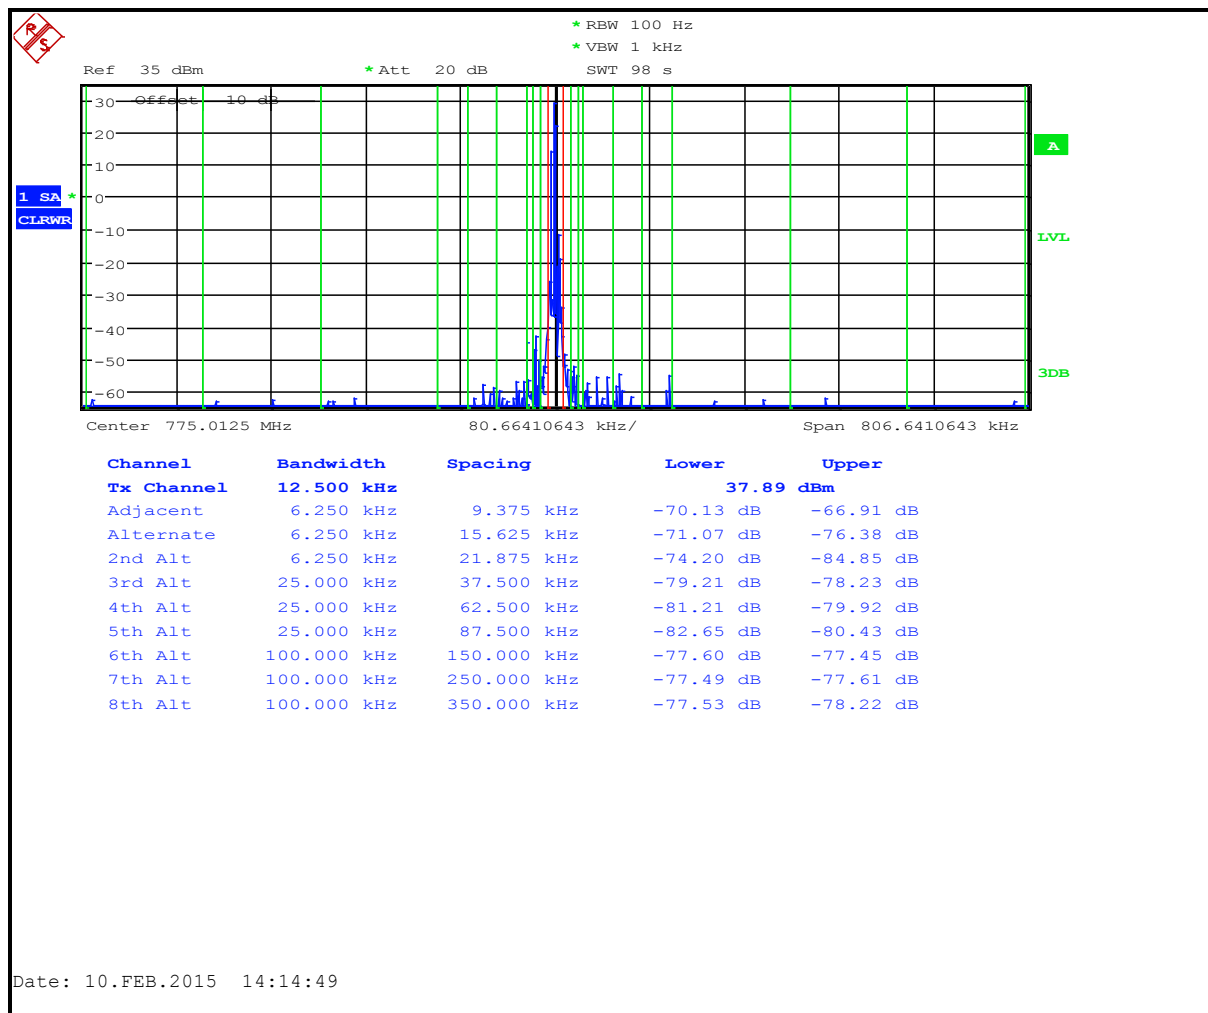


Table 6-4: Adjacent Channel Power – 775.0125 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-82.0
12 MHz to receive band	30(s)	-75	-104.7
In receive band	30(s)	-100	-110.1

Plot 6-5: Adjacent Channel Power – 775.9875 MHz; Narrowband Analog; <400 kHz

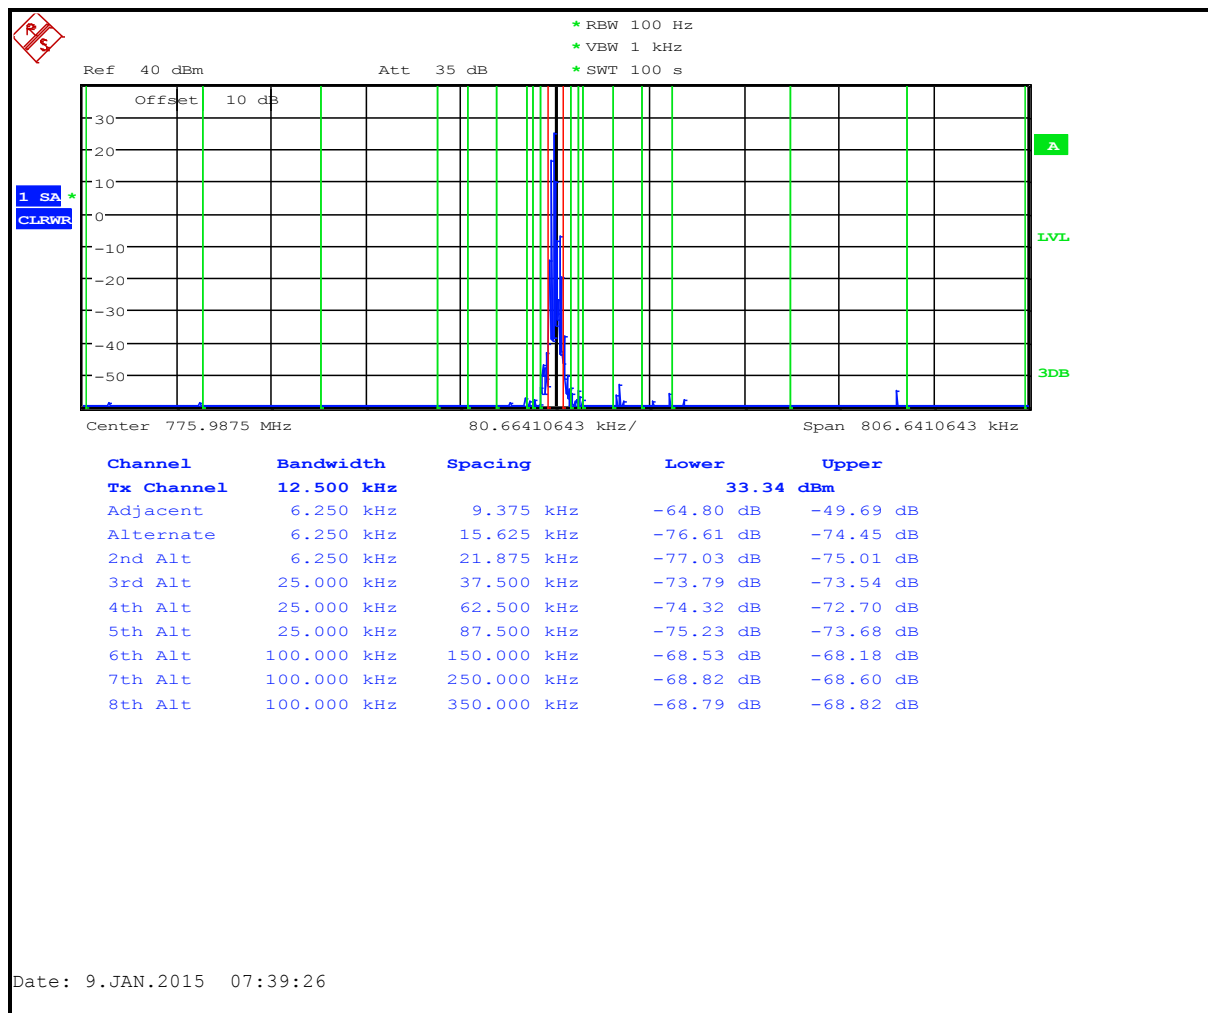


Table 6-5: Adjacent Channel Power – 775.9875 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.4
12 MHz to receive band	30(s)	-75	-101.4
In receive band	30(s)	-100	-107.8

Plot 6-6: Adjacent Channel Power – 798.0125 MHz; Narrowband Analog; <400 kHz

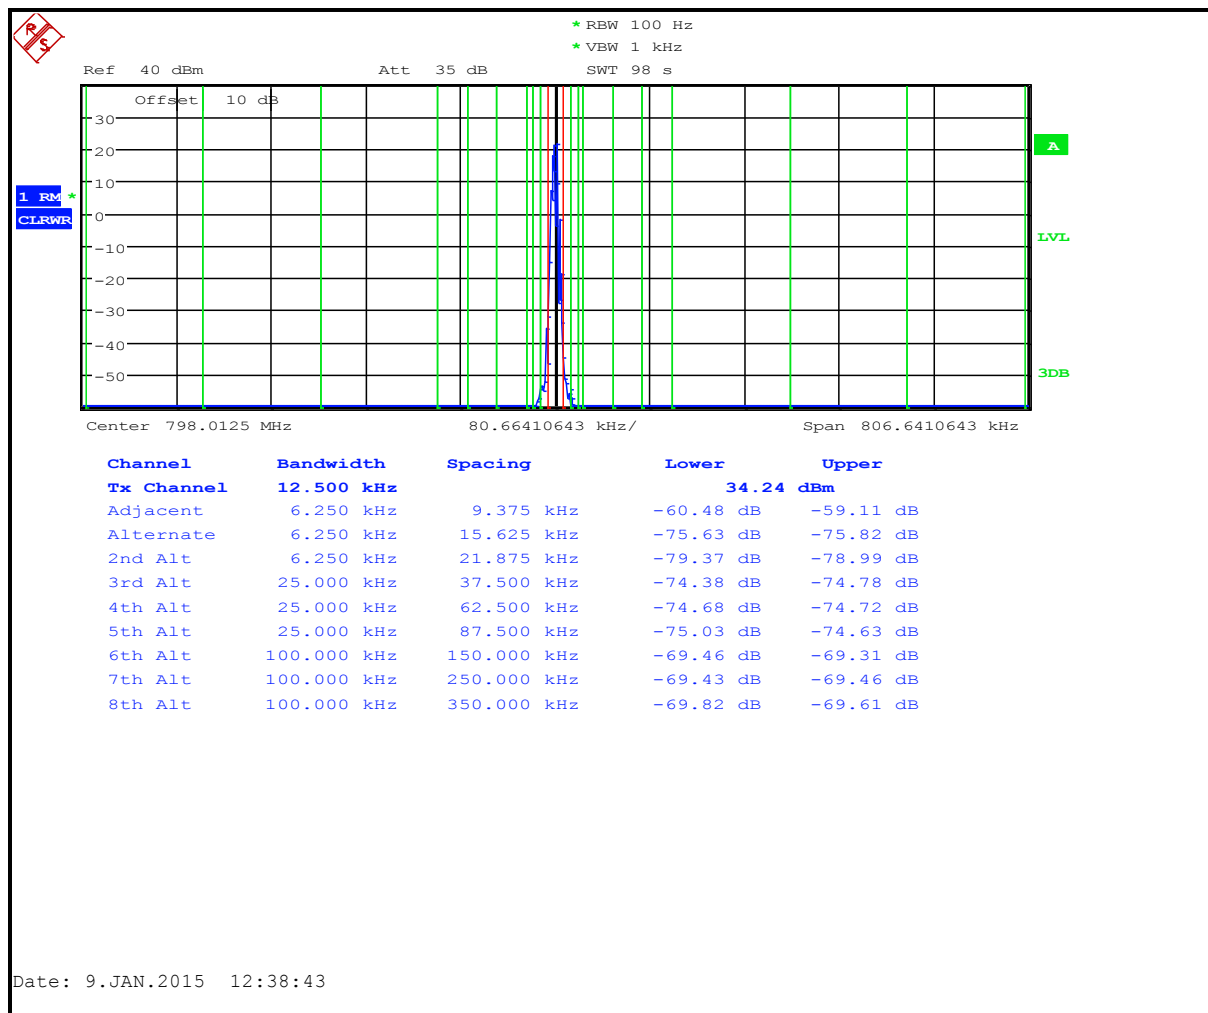


Table 6-6: Adjacent Channel Power – 798.0125 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.4
12 MHz to receive band	30(s)	-75	-99.3
In receive band	30(s)	-100	-102.4

Plot 6-7: Adjacent Channel Power – 799.0125 MHz; Narrowband Analog; <400 kHz

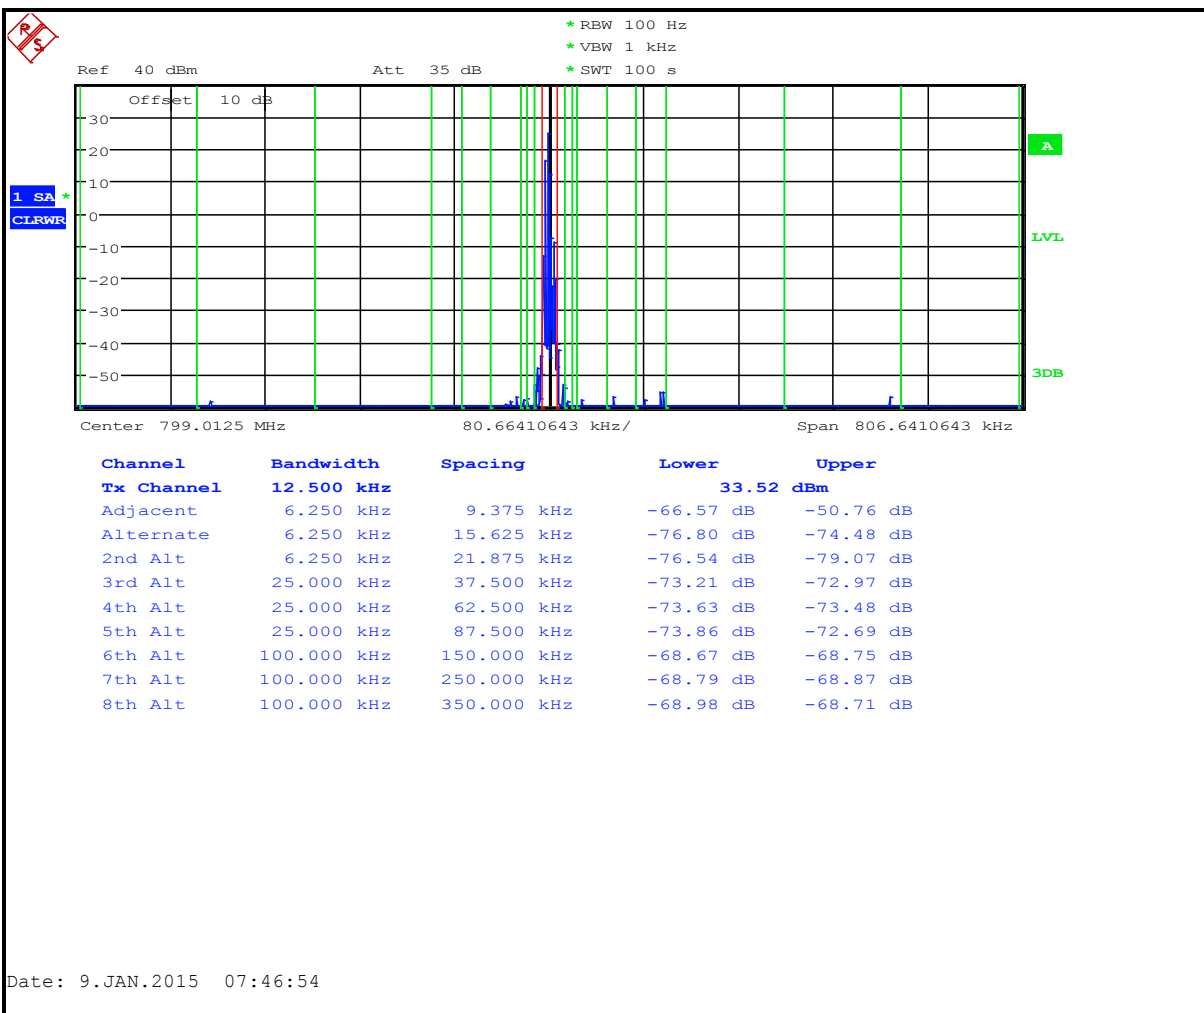


Table 6-7: Adjacent Channel Power – 799.0125 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.5
12 MHz to receive band	30(s)	-75	-99.5
In receive band	30(s)	-100	-101.8

Plot 6-8: Adjacent Channel Power – 801.0125 MHz; Narrowband Analog; <400 kHz

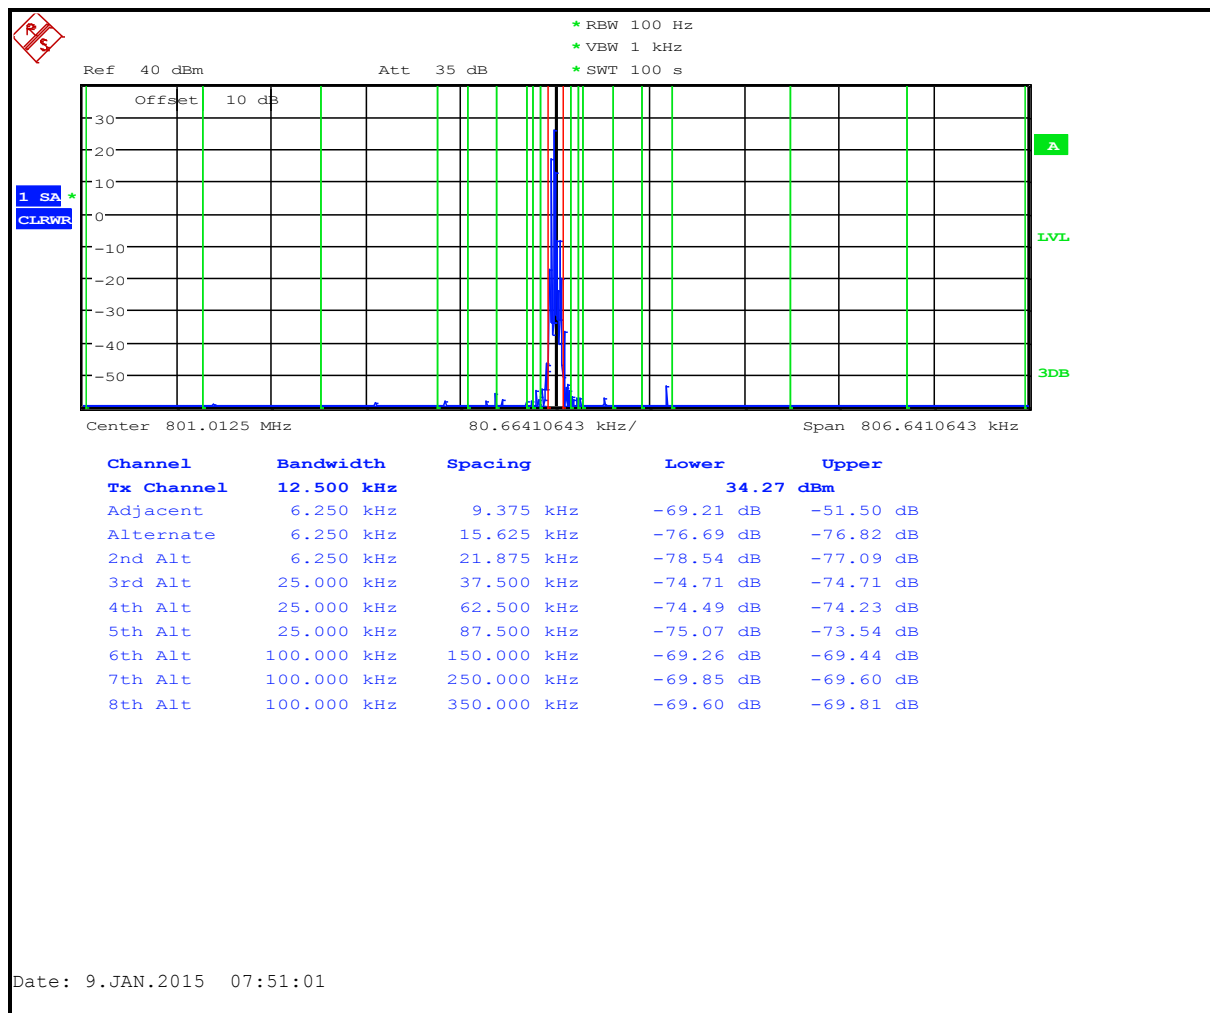


Table 6-8: Adjacent Channel Power – 801.0125 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-82.1
12 MHz to receive band	30(s)	-75	-101.4
In receive band	30(s)	-100	-105.8

Plot 6-9: Adjacent Channel Power – 805.0125 MHz; Narrowband Analog; <400 kHz

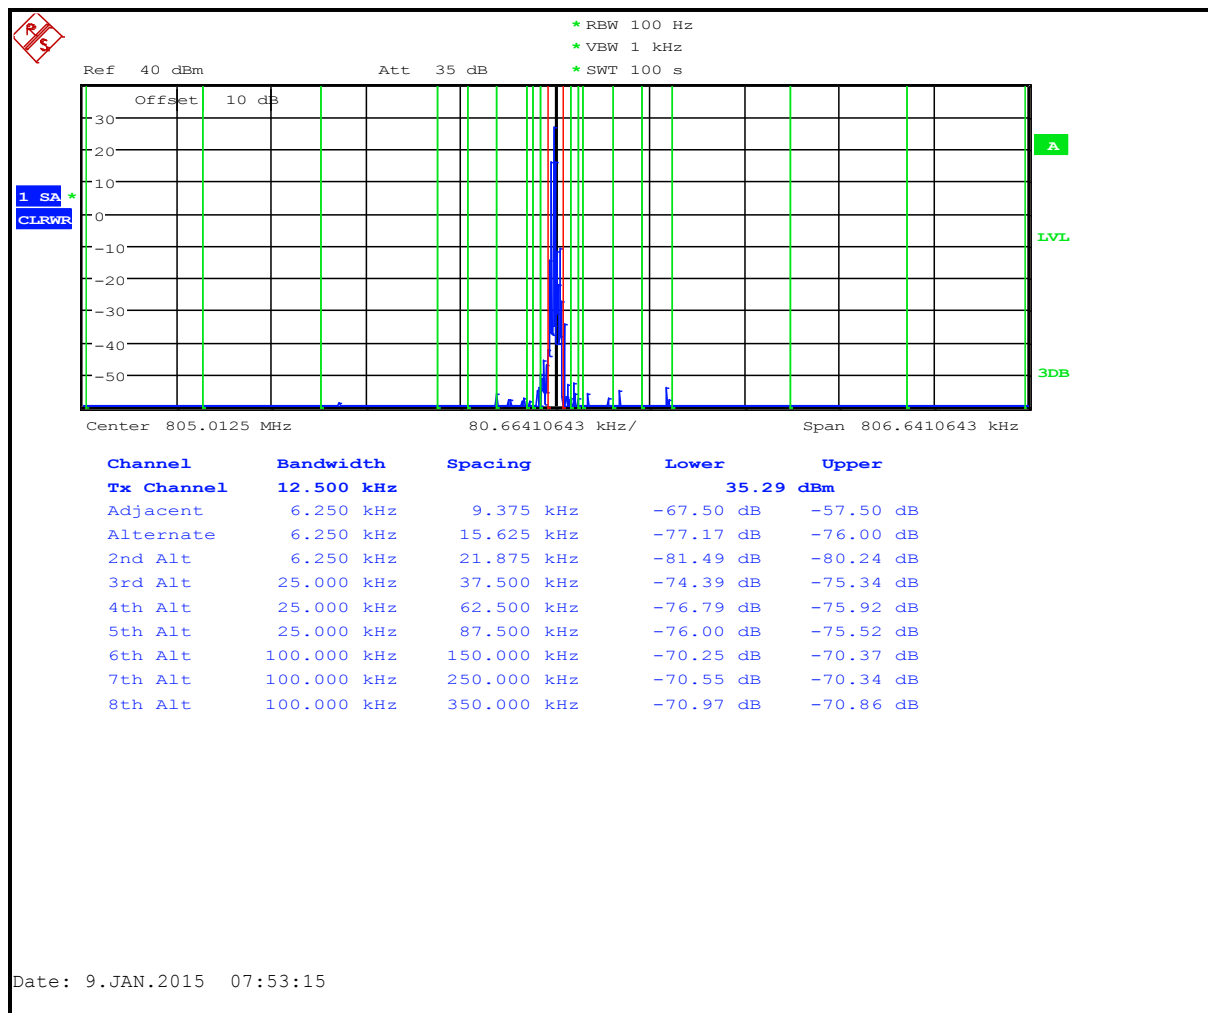


Table 6-9: Adjacent Channel Power – 805.0125 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.3
12 MHz to receive band	30(s)	-75	-93.6
In receive band	30(s)	-100	-107.6

Plot 6-10: Adjacent Channel Power – 805.9875 MHz; Narrowband Analog; <400 kHz

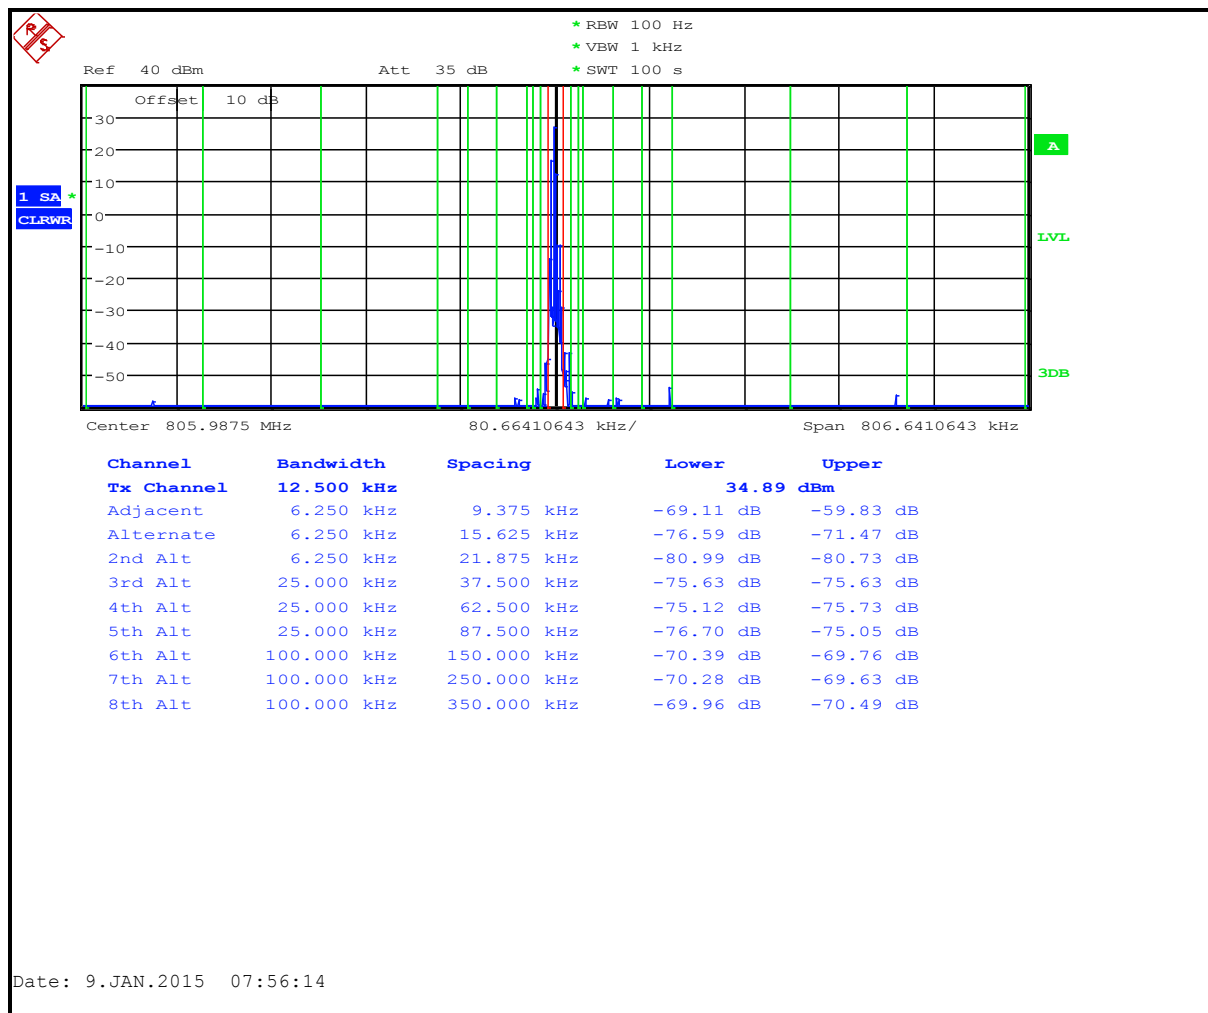


Table 6-10: Adjacent Channel Power – 805.9875 MHz; Narrowband Analog; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-77.1
12 MHz to receive band	30(s)	-75	-95.1
In receive band	30(s)	-100	-106.6

Plot 6-11: Adjacent Channel Power – 768.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz

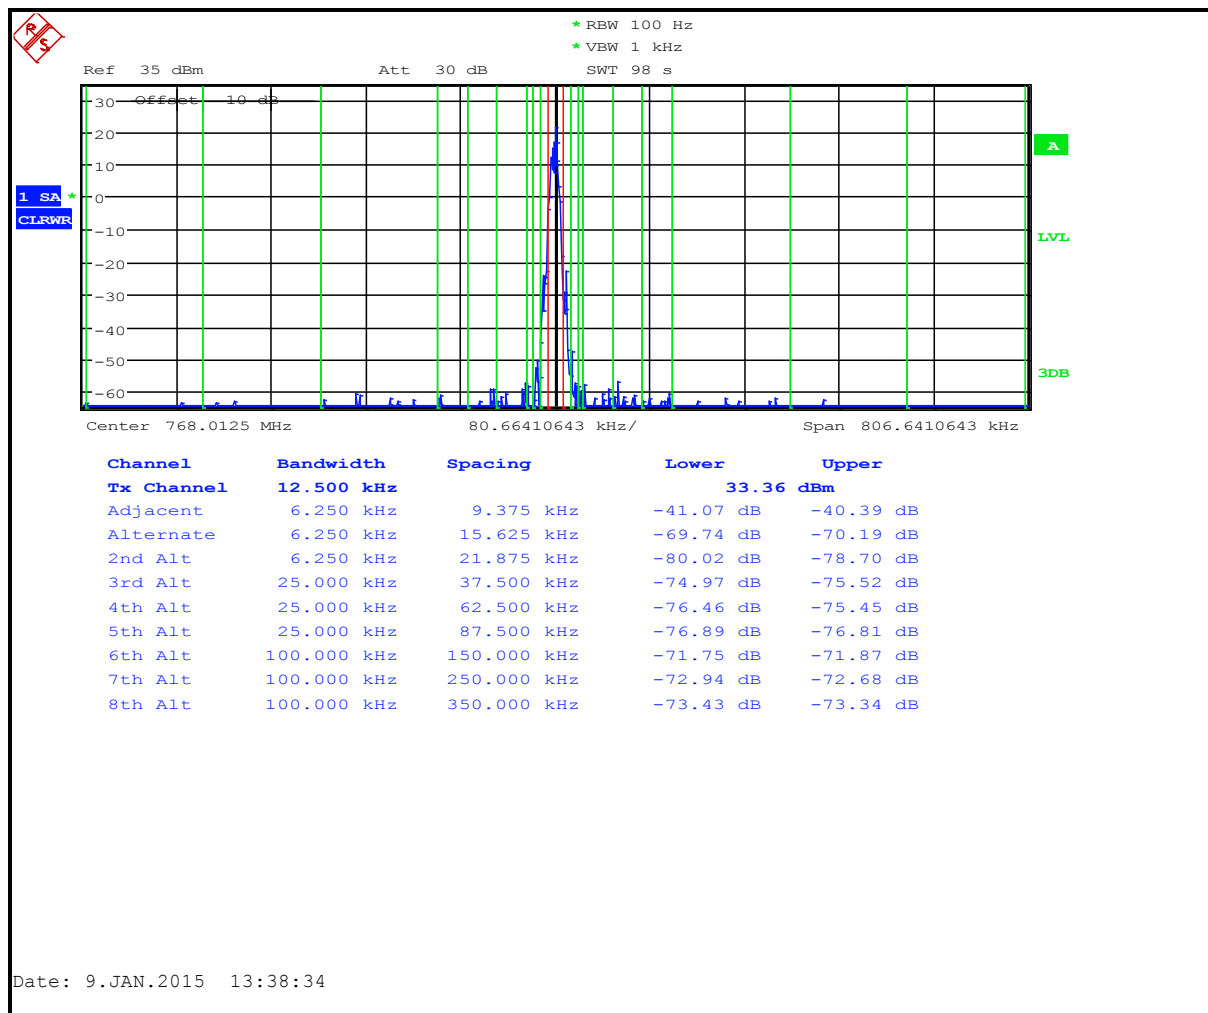


Table 6-11: Adjacent Channel Power – 768.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-86.2
12 MHz to receive band	30(s)	-75	-105.2
In receive band	30(s)	-100	-107.0

Plot 6-12: Adjacent Channel Power – 769.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz

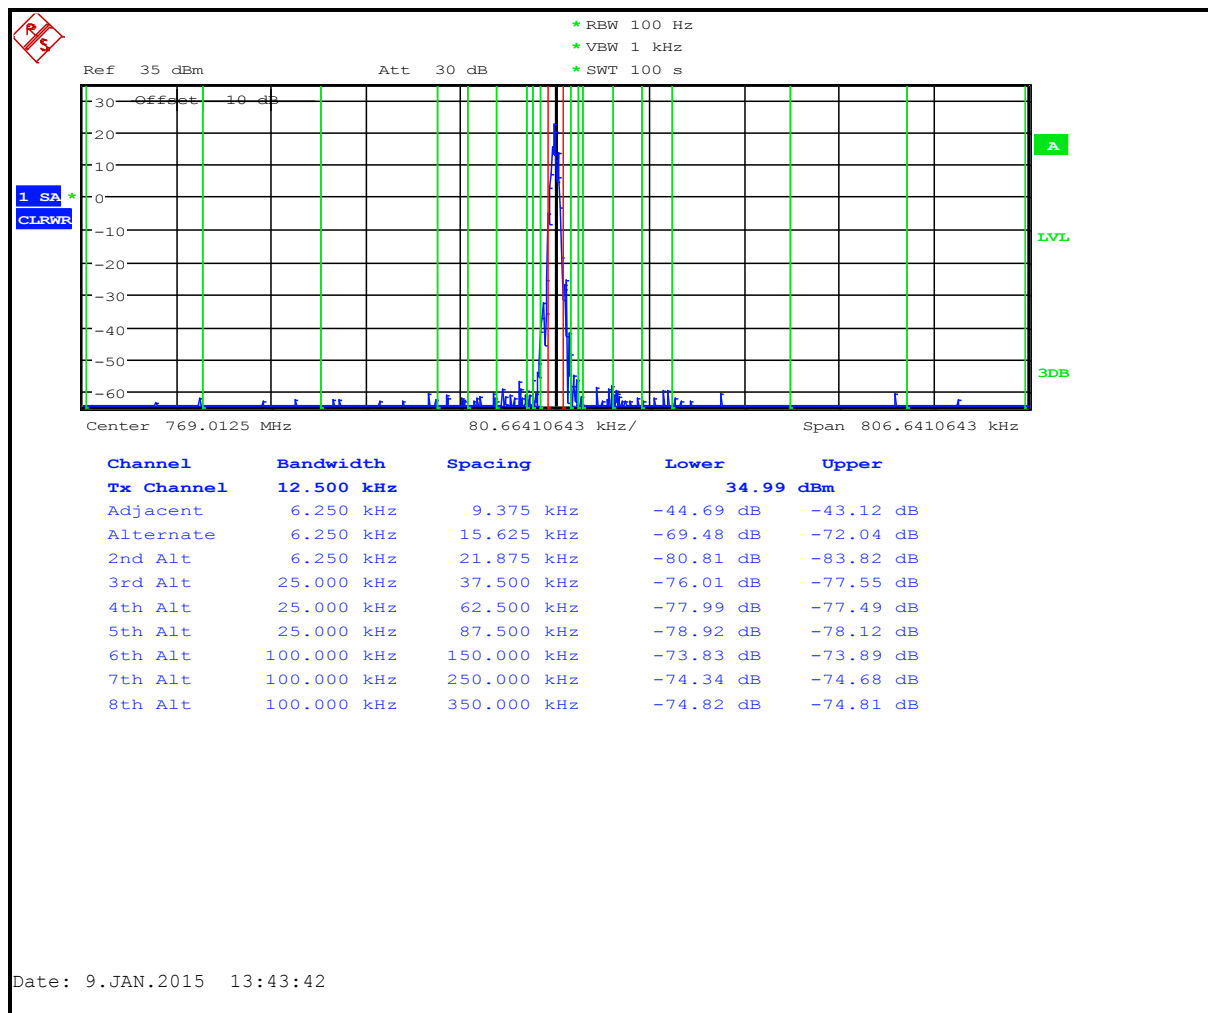


Table 6-12: Adjacent Channel Power – 769.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.4
12 MHz to receive band	30(s)	-75	-106.4
In receive band	30(s)	-100	-105.7

Plot 6-13: Adjacent Channel Power – 771.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz

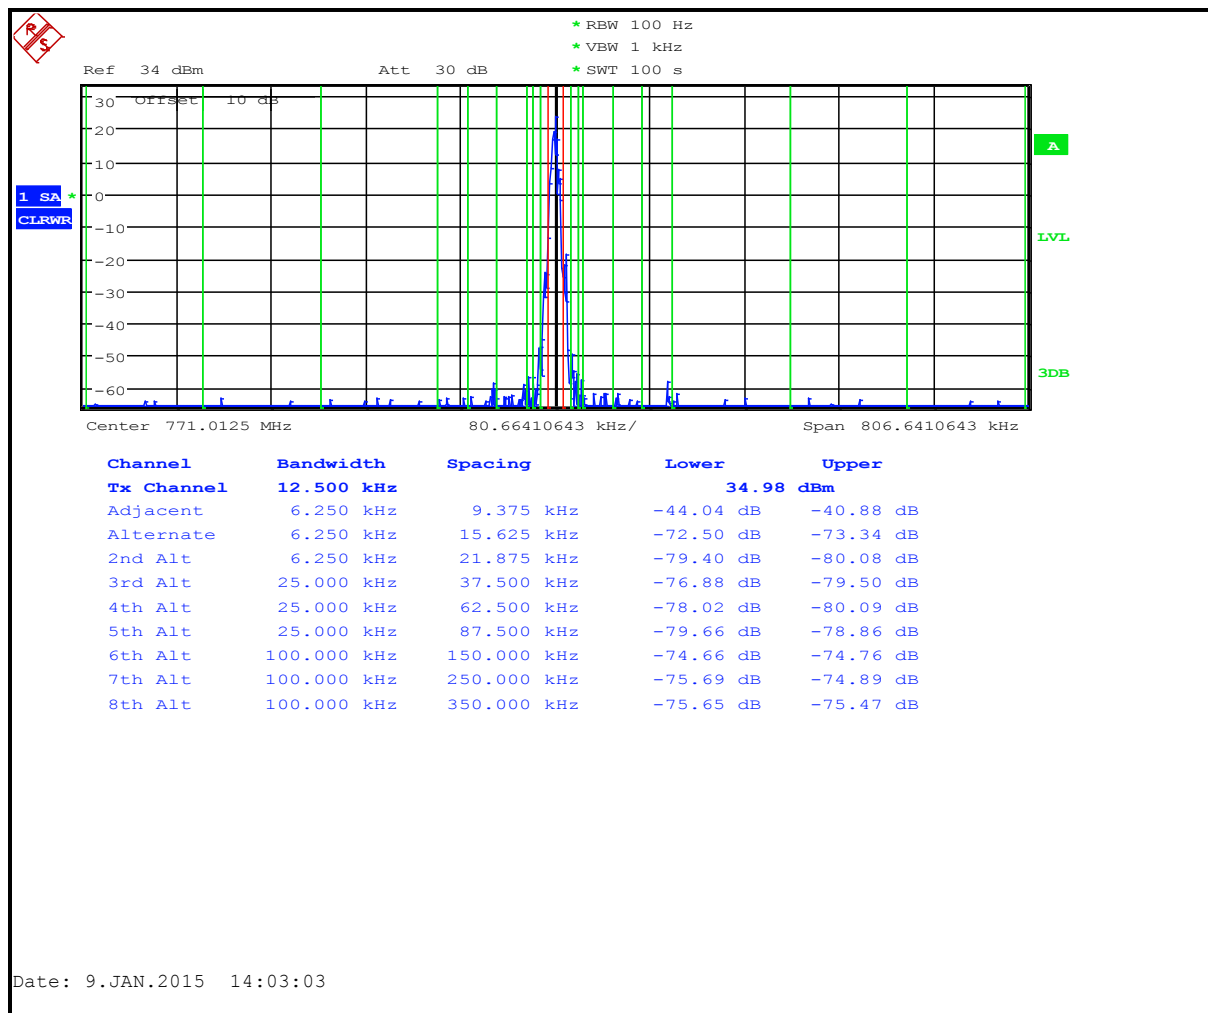


Table 6-13: Adjacent Channel Power – 771.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-83.8
12 MHz to receive band	30(s)	-75	-107.3
In receive band	30(s)	-100	-107.2

Plot 6-14: Adjacent Channel Power – 775.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz

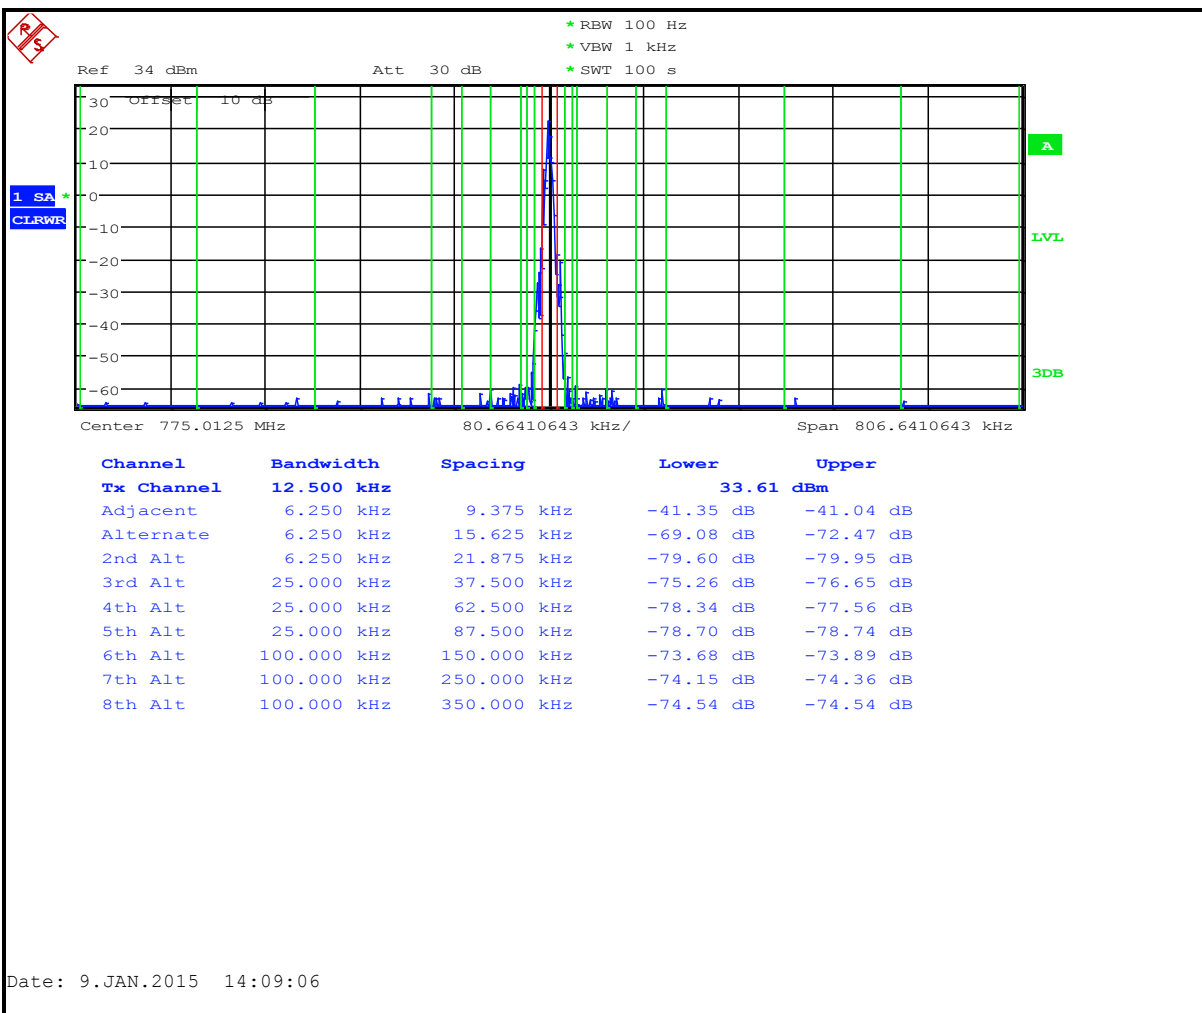


Table 6-14: Adjacent Channel Power – 775.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.3
12 MHz to receive band	30(s)	-75	-104.0
In receive band	30(s)	-100	-107.1

Plot 6-15: Adjacent Channel Power – 775.9875 MHz; EDACS 2-Level FSK 9600; <400 kHz

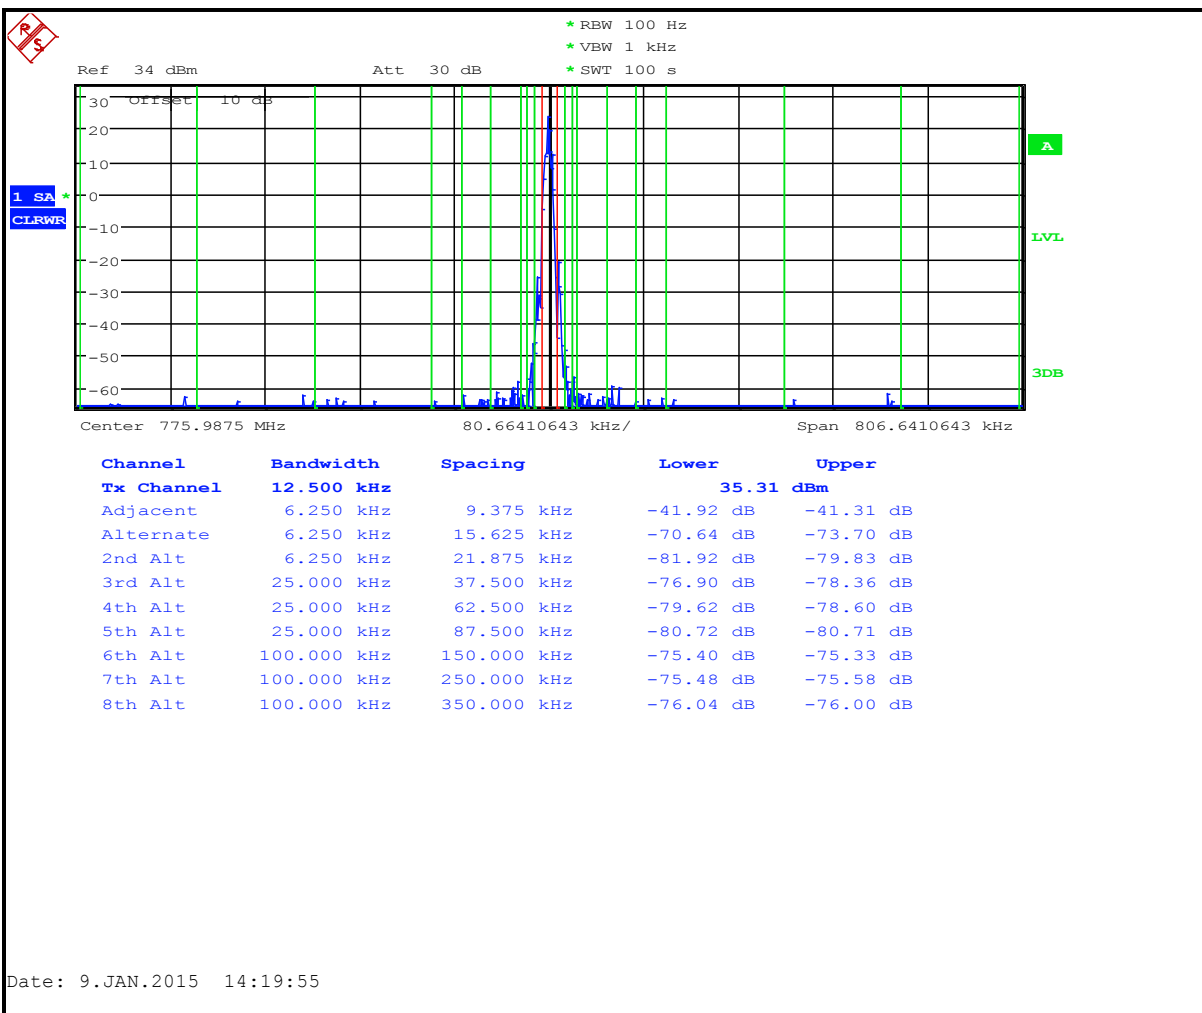


Table 6-15: Adjacent Channel Power – 775.9875 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-78.7
12 MHz to receive band	30(s)	-75	-101.4
In receive band	30(s)	-100	-106.7

Plot 6-16: Adjacent Channel Power – 798.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz

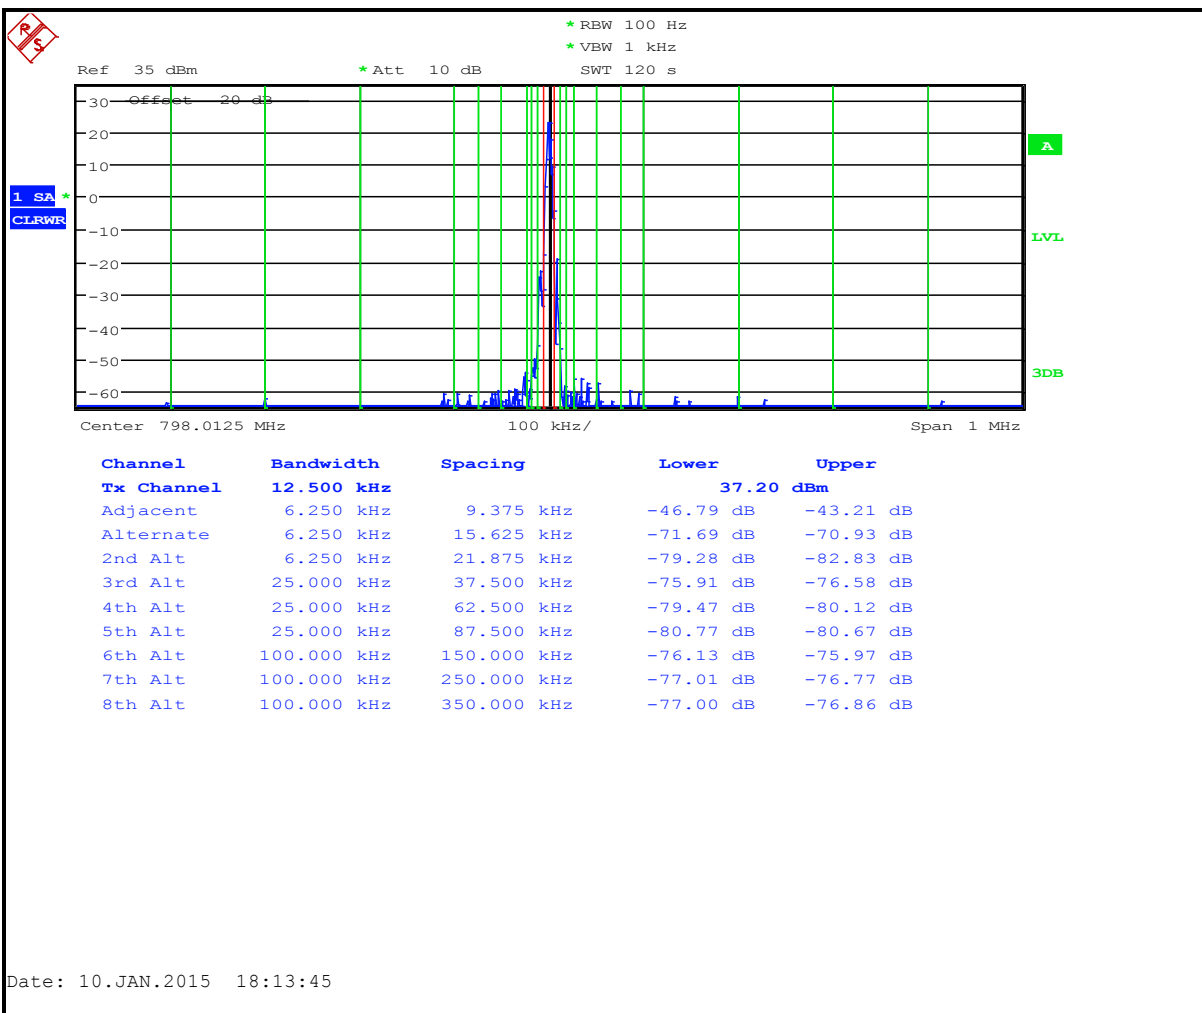


Table 6-16: Adjacent Channel Power – 798.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-85.6
12 MHz to receive band	30(s)	-75	-98.0
In receive band	30(s)	-100	-101.0

Plot 6-17: Adjacent Channel Power – 799.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz

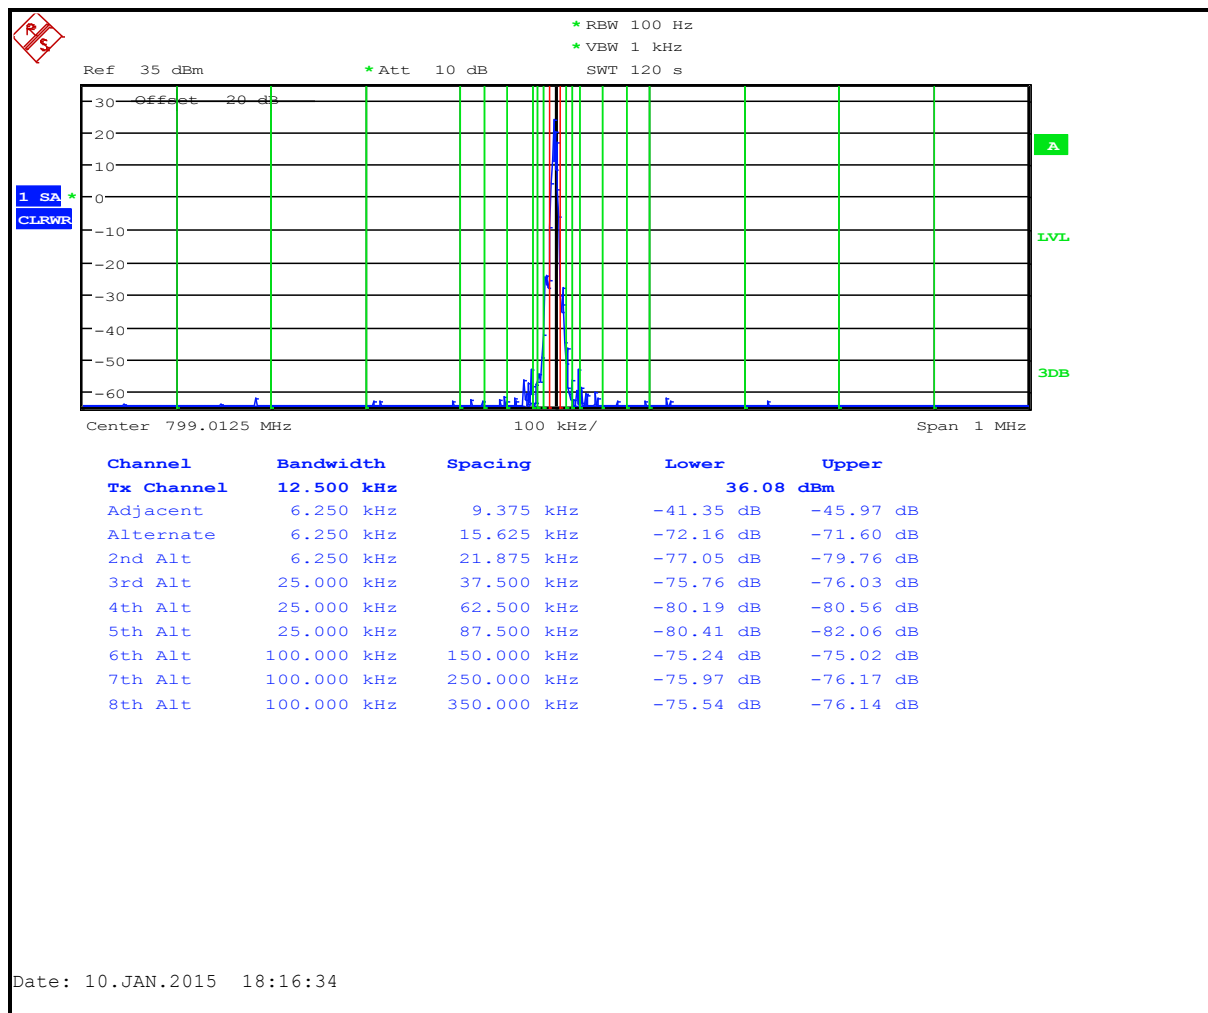


Table 6-17: Adjacent Channel Power – 799.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.0
12 MHz to receive band	30(s)	-75	-100.1
In receive band	30(s)	-100	-103.7

Plot 6-18: Adjacent Channel Power – 801.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz

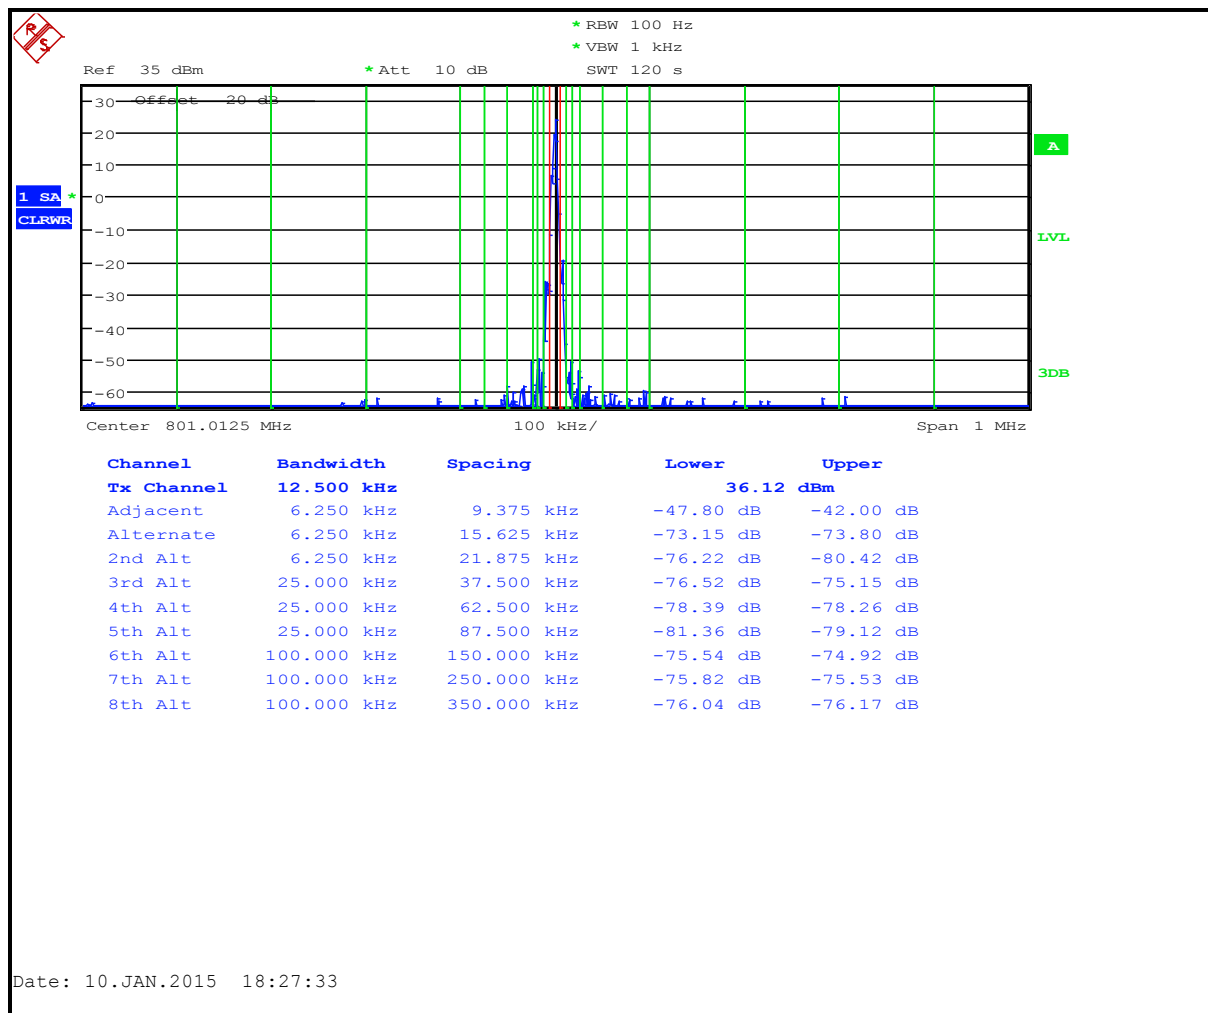


Table 6-18: Adjacent Channel Power – 801.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.3
12 MHz to receive band	30(s)	-75	-99.9
In receive band	30(s)	-100	-107.8

Plot 6-19: Adjacent Channel Power – 805.0125 MHz; EDACS 2-Level FSK 9600; <400 kHz

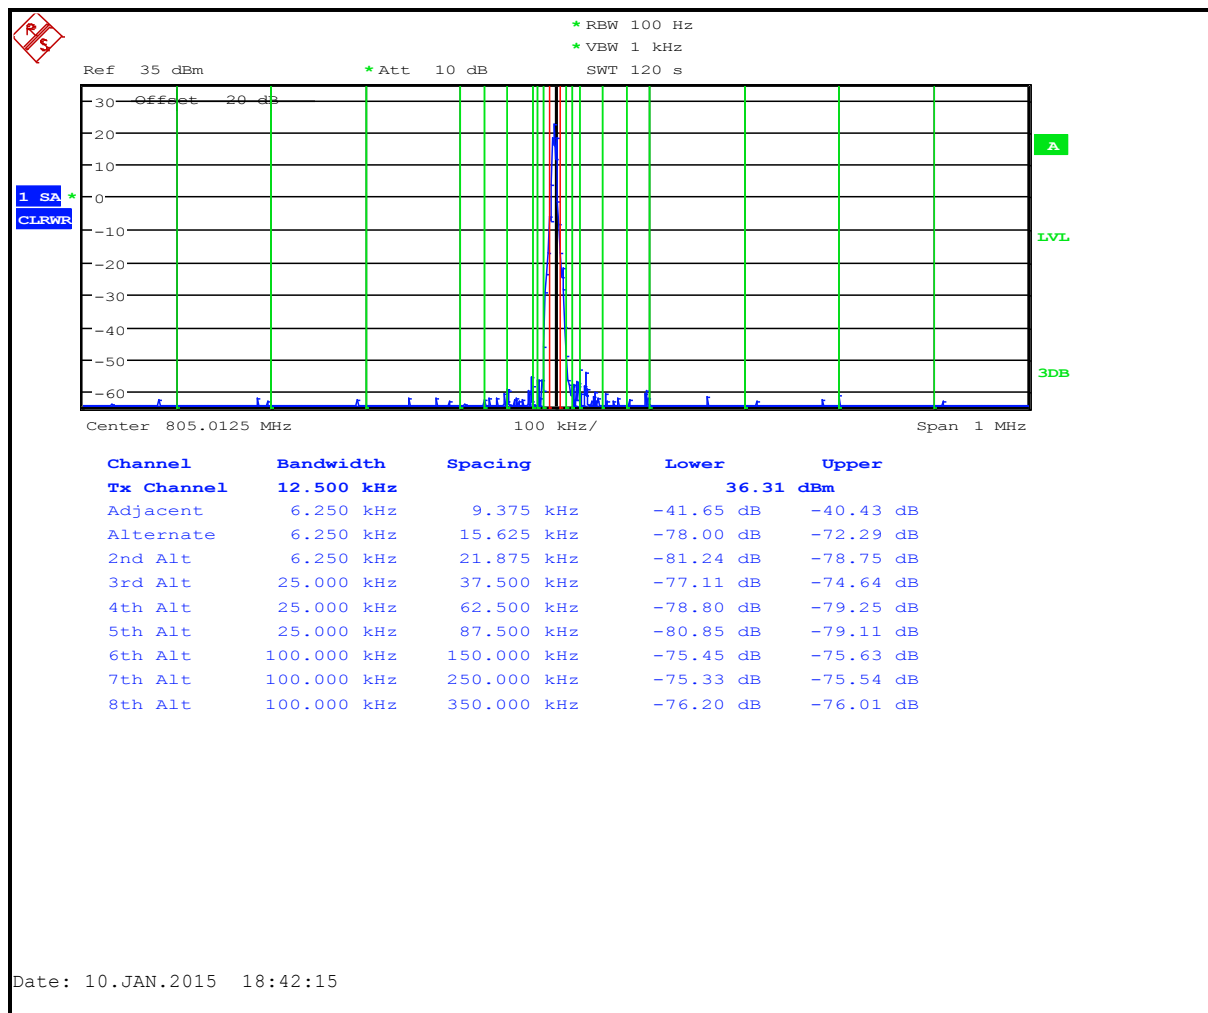


Table 6-19: Adjacent Channel Power – 805.0125 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.6
12 MHz to receive band	30(s)	-75	-94.5
In receive band	30(s)	-100	-108.0

Plot 6-20: Adjacent Channel Power – 805.9875 MHz; EDACS 2-Level FSK 9600; <400 kHz

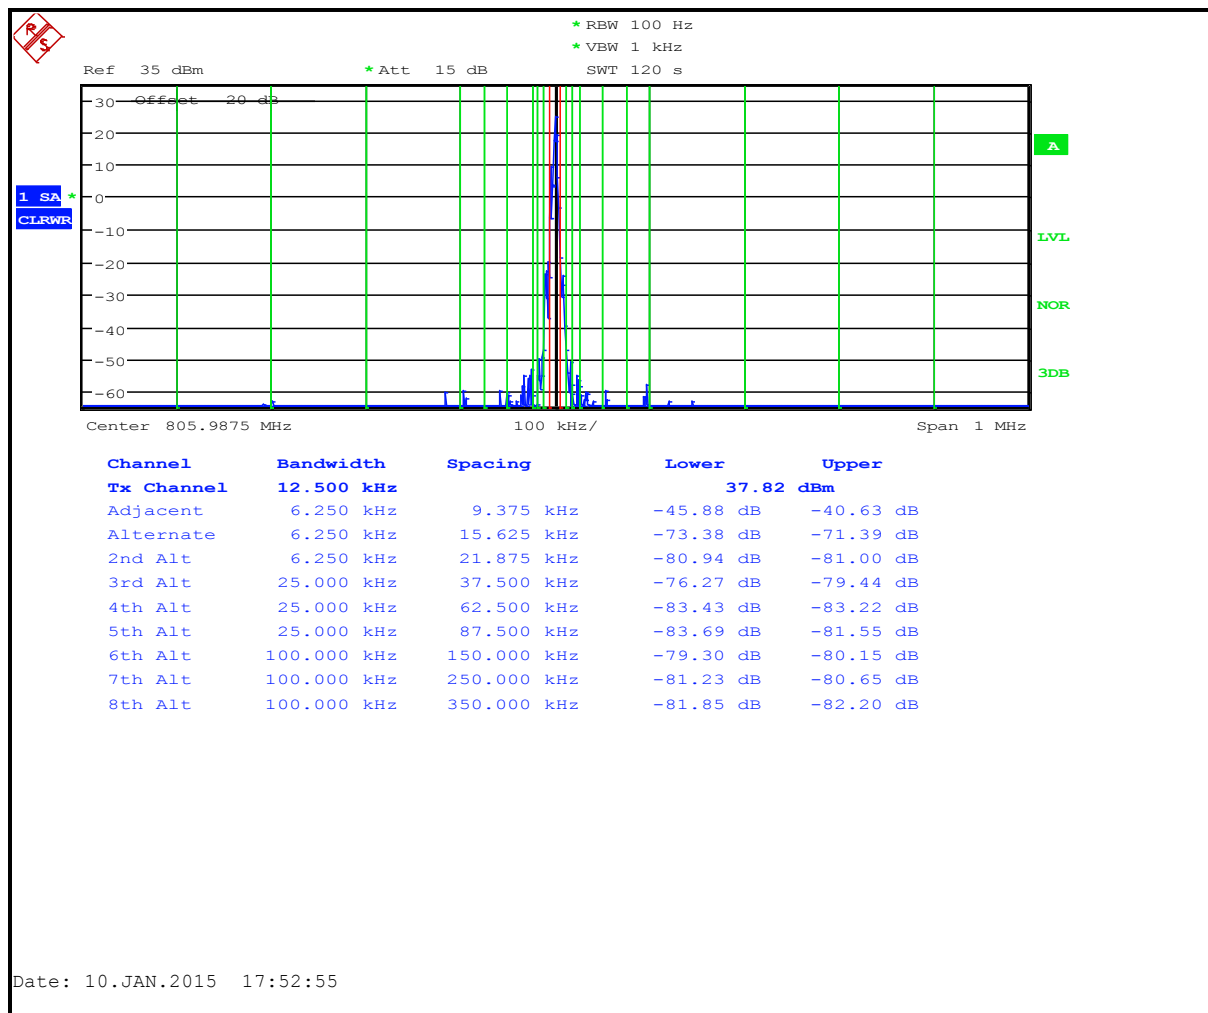


Table 6-20: Adjacent Channel Power – 805.9875 MHz; EDACS 2-Level FSK 9600; 400 kHz–RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.2
12 MHz to receive band	30(s)	-75	-94.1
In receive band	30(s)	-100	-107.3

Plot 6-21: Adjacent Channel Power – 768.0125 MHz; OTP SMR; <400 kHz

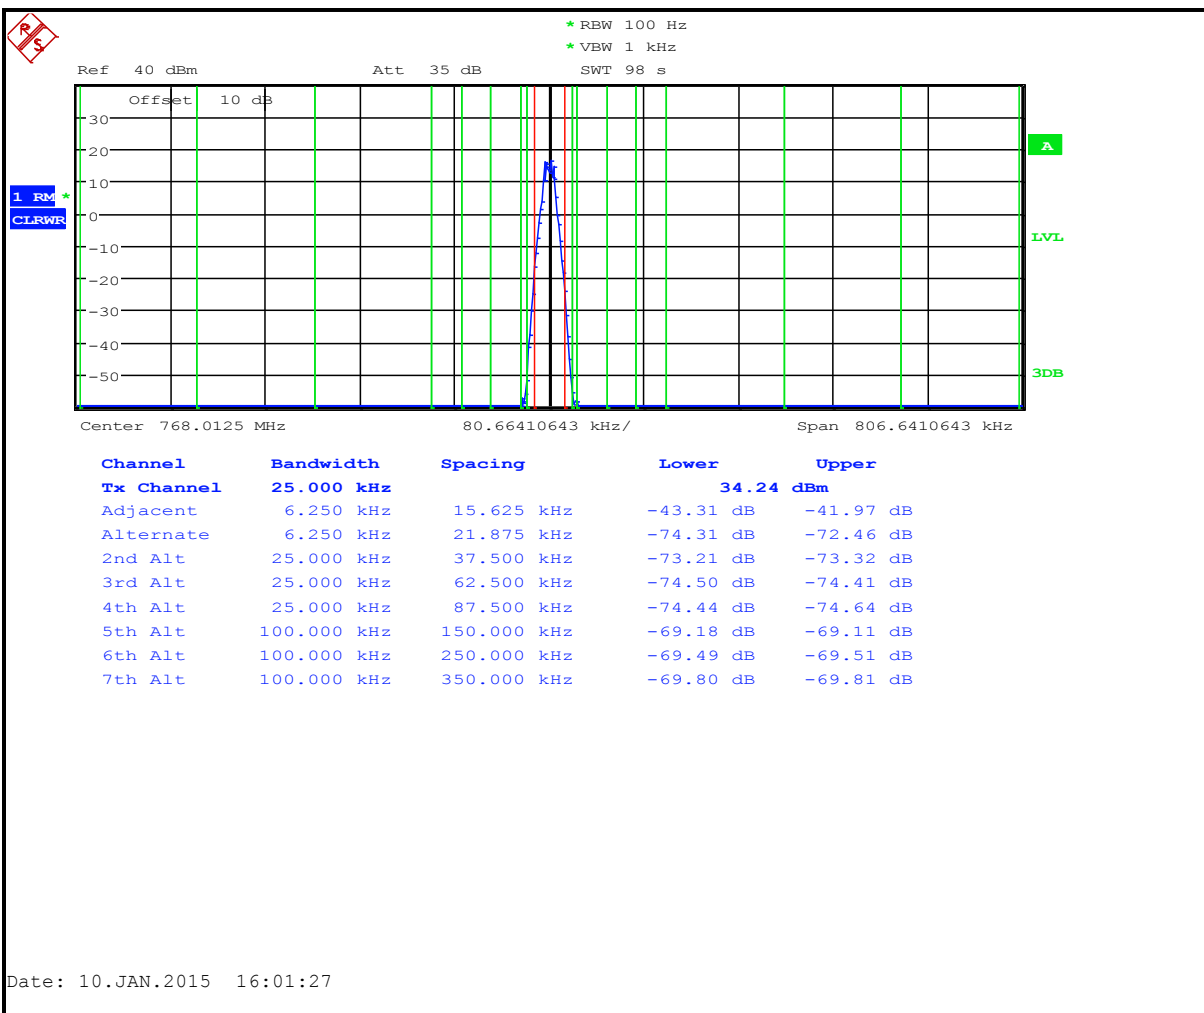


Table 6-21: Adjacent Channel Power – 768.0125 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-86.3
12 MHz to receive band	30(s)	-75	-107.1
In receive band	30(s)	-100	-107.1

Plot 6-22: Adjacent Channel Power – 769.0125 MHz; OTP SMR; <400 kHz

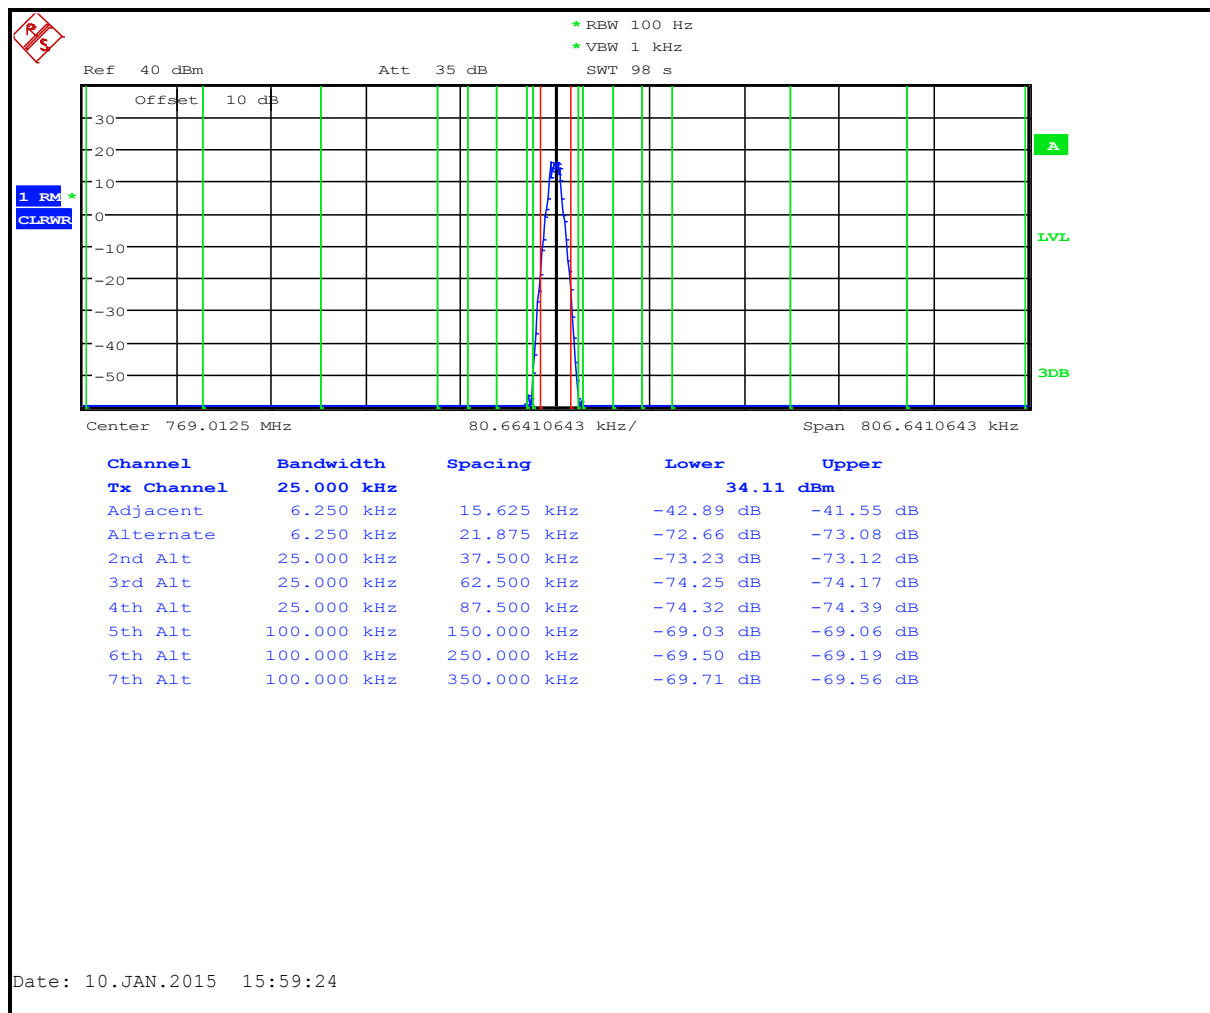


Table 6-22: Adjacent Channel Power – 769.0125 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-78.6
12 MHz to receive band	30(s)	-75	-106.4
In receive band	30(s)	-100	-107.4

Plot 6-23: Adjacent Channel Power – 771.0125 MHz; OTP SMR; <400 kHz

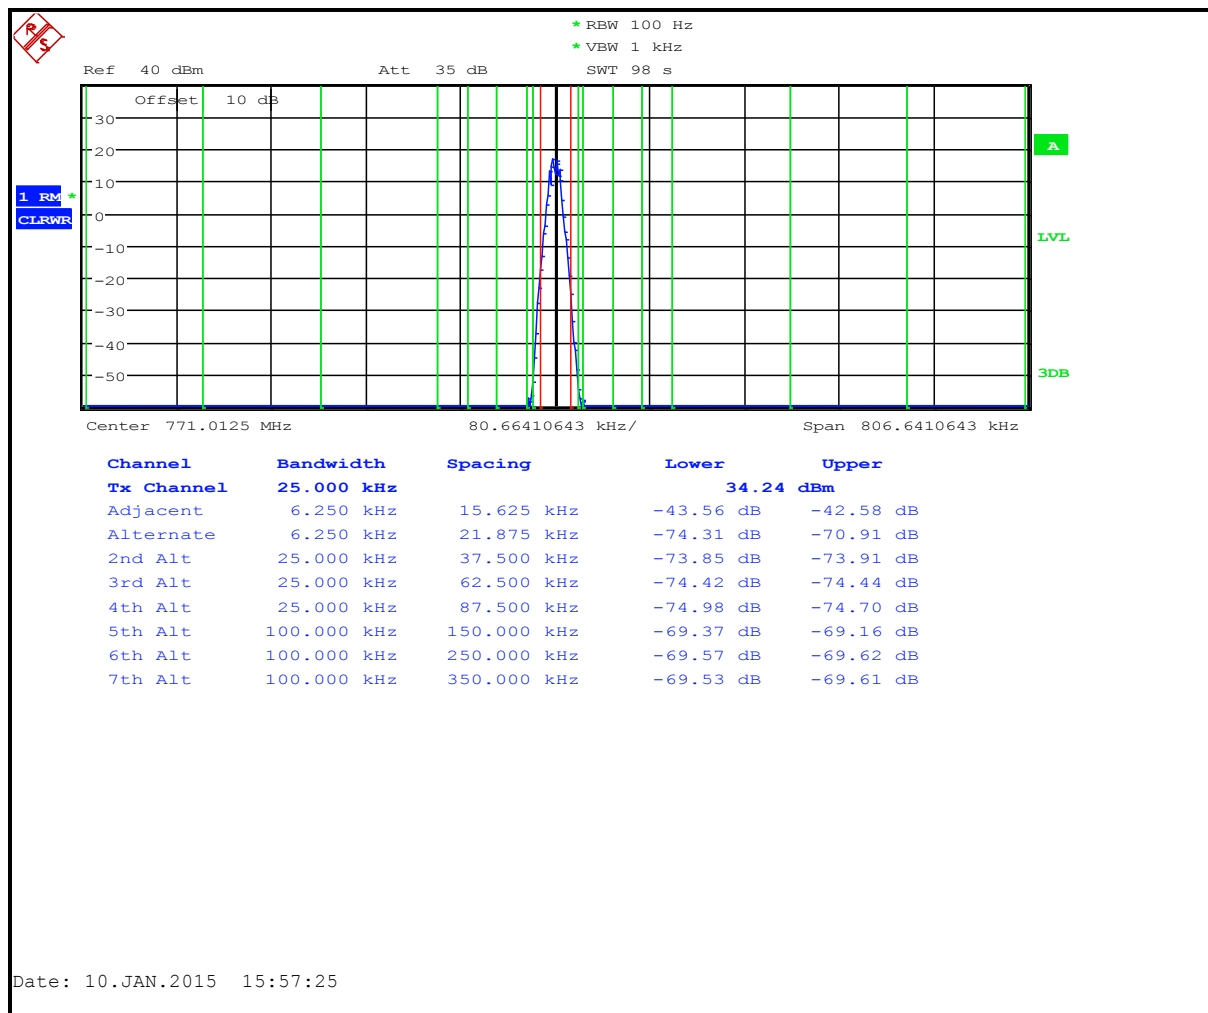


Table 6-23: Adjacent Channel Power – 771.0125 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.5
12 MHz to receive band	30(s)	-75	-106.7
In receive band	30(s)	-100	-107.9

Plot 6-24: Adjacent Channel Power – 775.0125 MHz; OTP SMR; <400 kHz

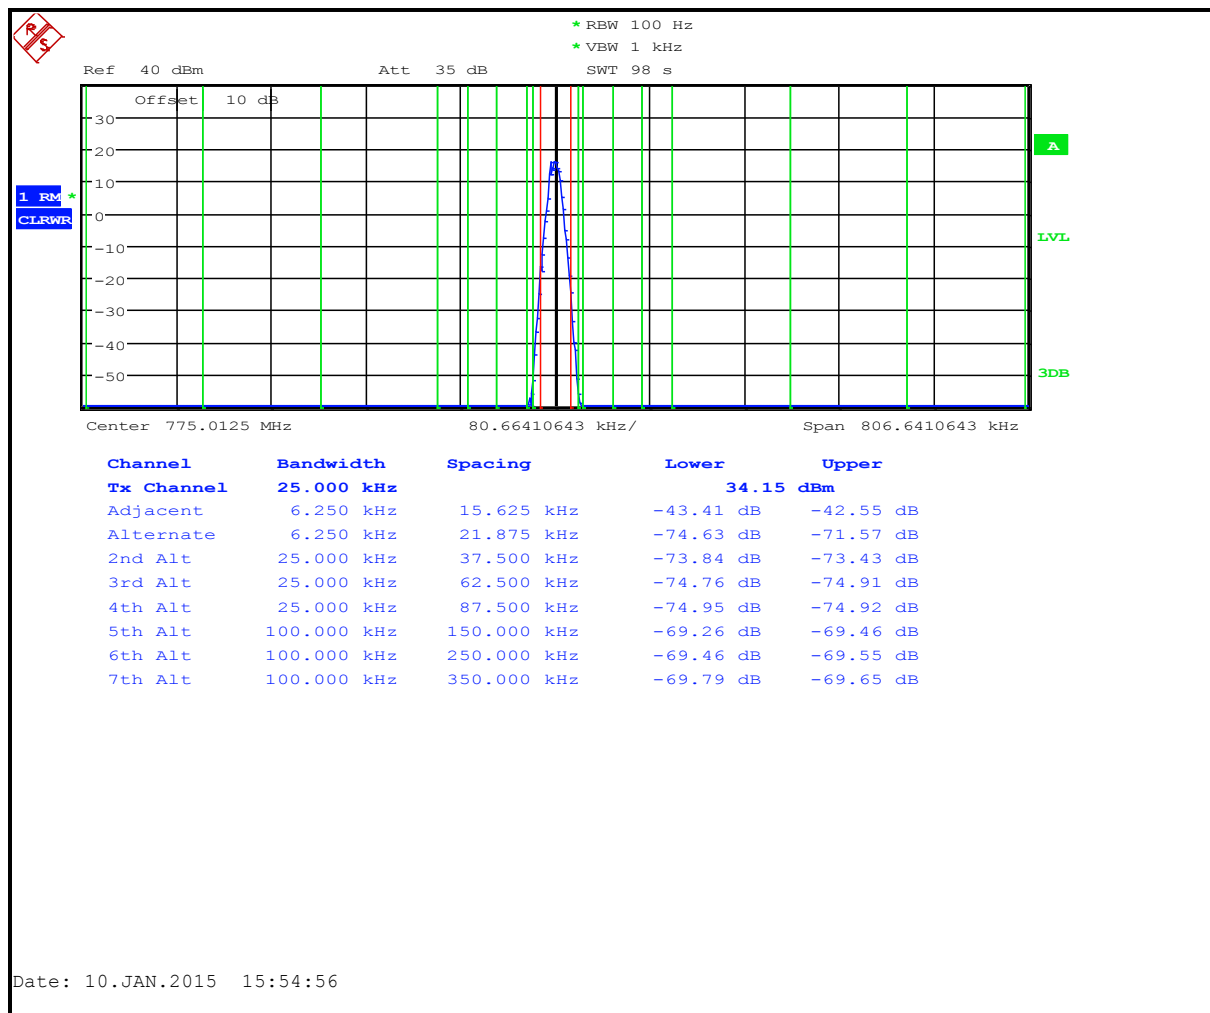


Table 6-24: Adjacent Channel Power – 775.0125 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.1
12 MHz to receive band	30(s)	-75	-104.8
In receive band	30(s)	-100	-105.8

Plot 6-25: Adjacent Channel Power – 775.9875 MHz; OTP SMR; <400 kHz

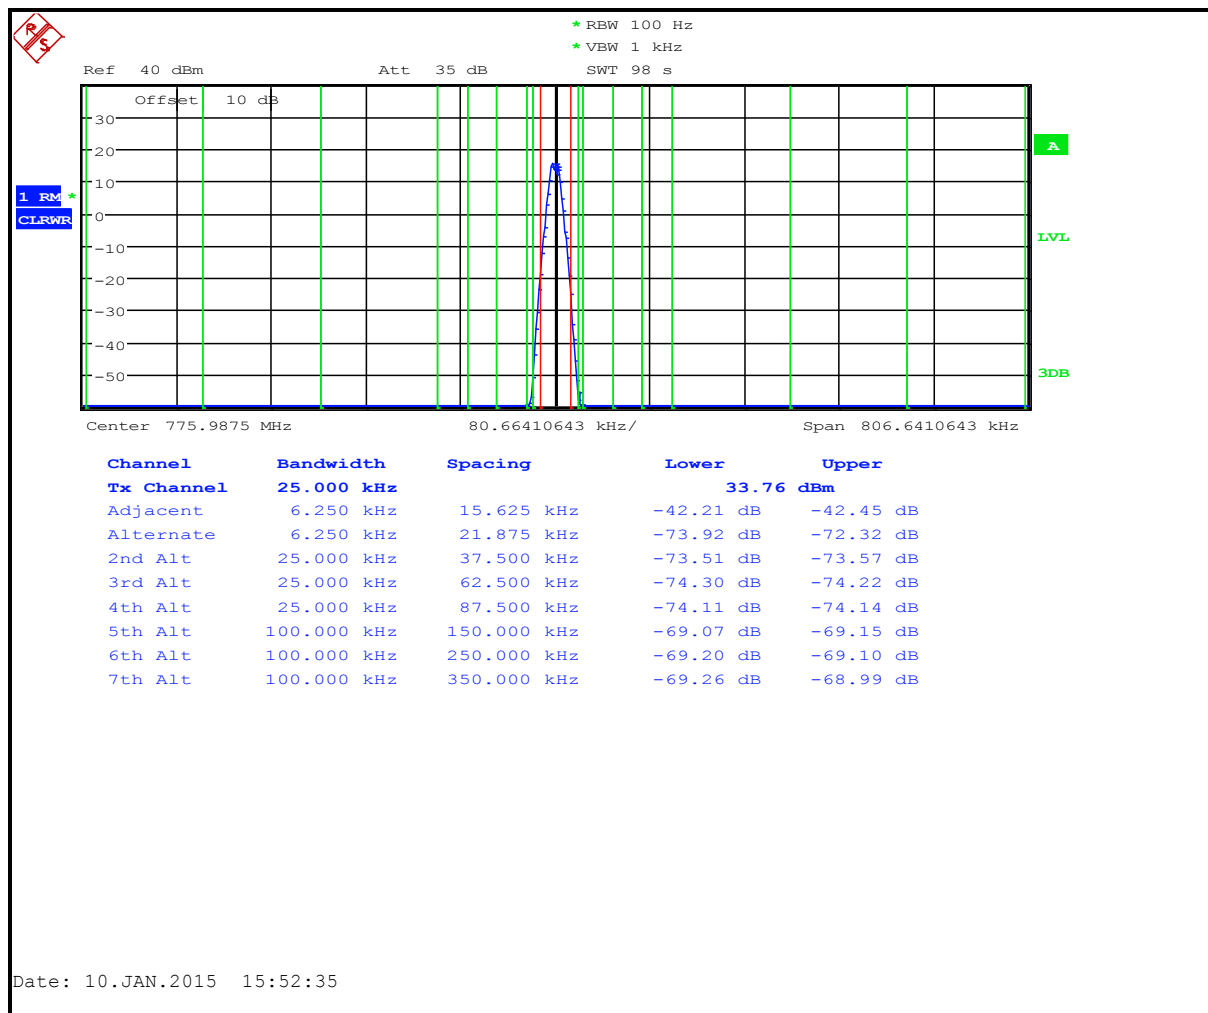


Table 6-25: Adjacent Channel Power – 775.9875 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	80.4
12 MHz to receive band	30(s)	-75	102.1
In receive band	30(s)	-100	106.9

Plot 6-26: Adjacent Channel Power – 798.0125 MHz; OTP SMR; <400 kHz

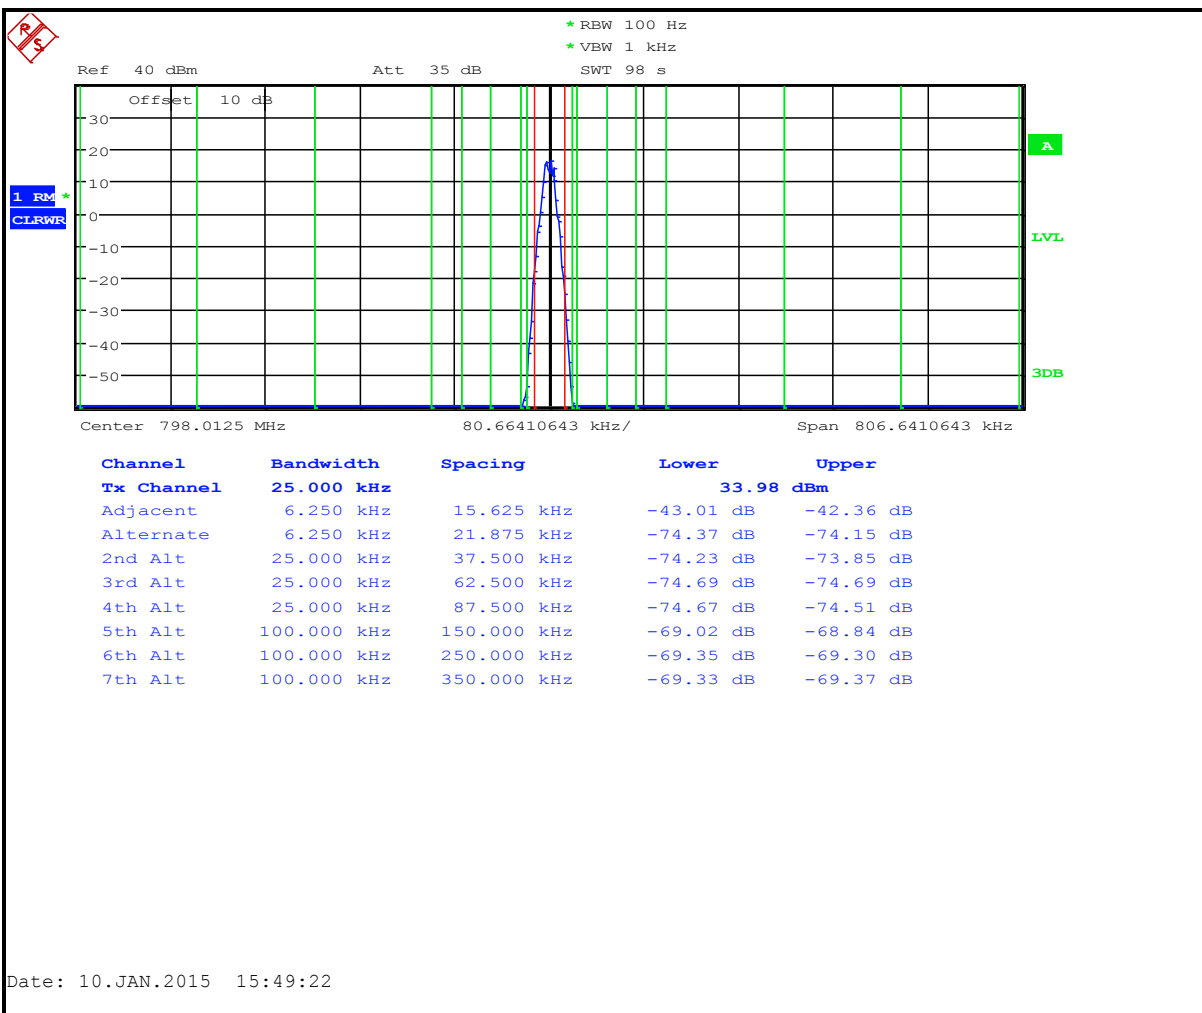


Table 6-26: Adjacent Channel Power – 798.0125 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.0
12 MHz to receive band	30(s)	-75	-98.7
In receive band	30(s)	-100	-101.8

Plot 6-27: Adjacent Channel Power – 799.0125 MHz; OTP SMR; <400 kHz

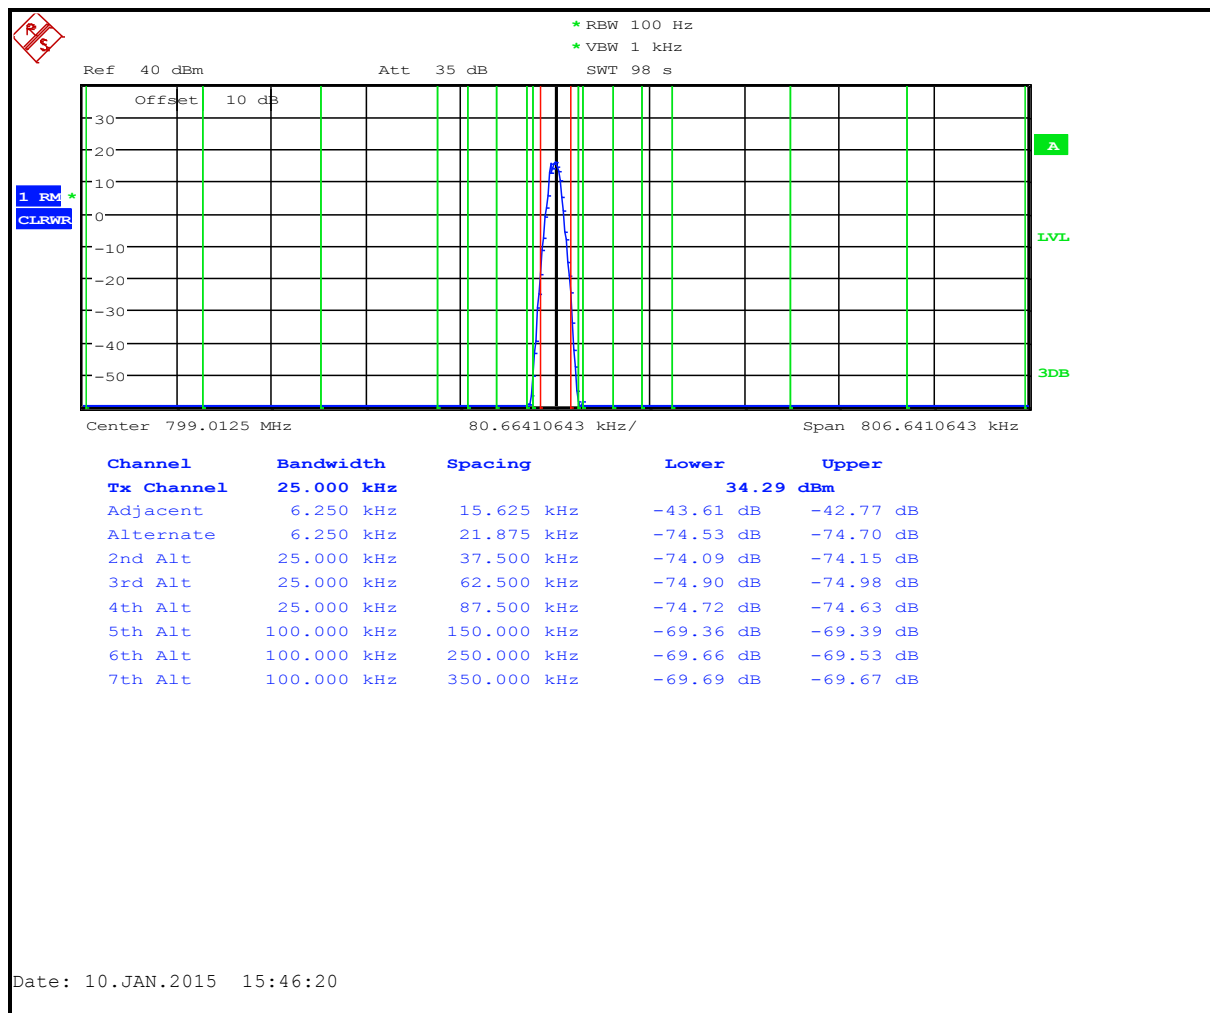


Table 6-27: Adjacent Channel Power – 799.0125 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.6
12 MHz to receive band	30(s)	-75	-97.4
In receive band	30(s)	-100	-102.1

Plot 6-28: Adjacent Channel Power – 801.0125 MHz; OTP SMR; <400 kHz

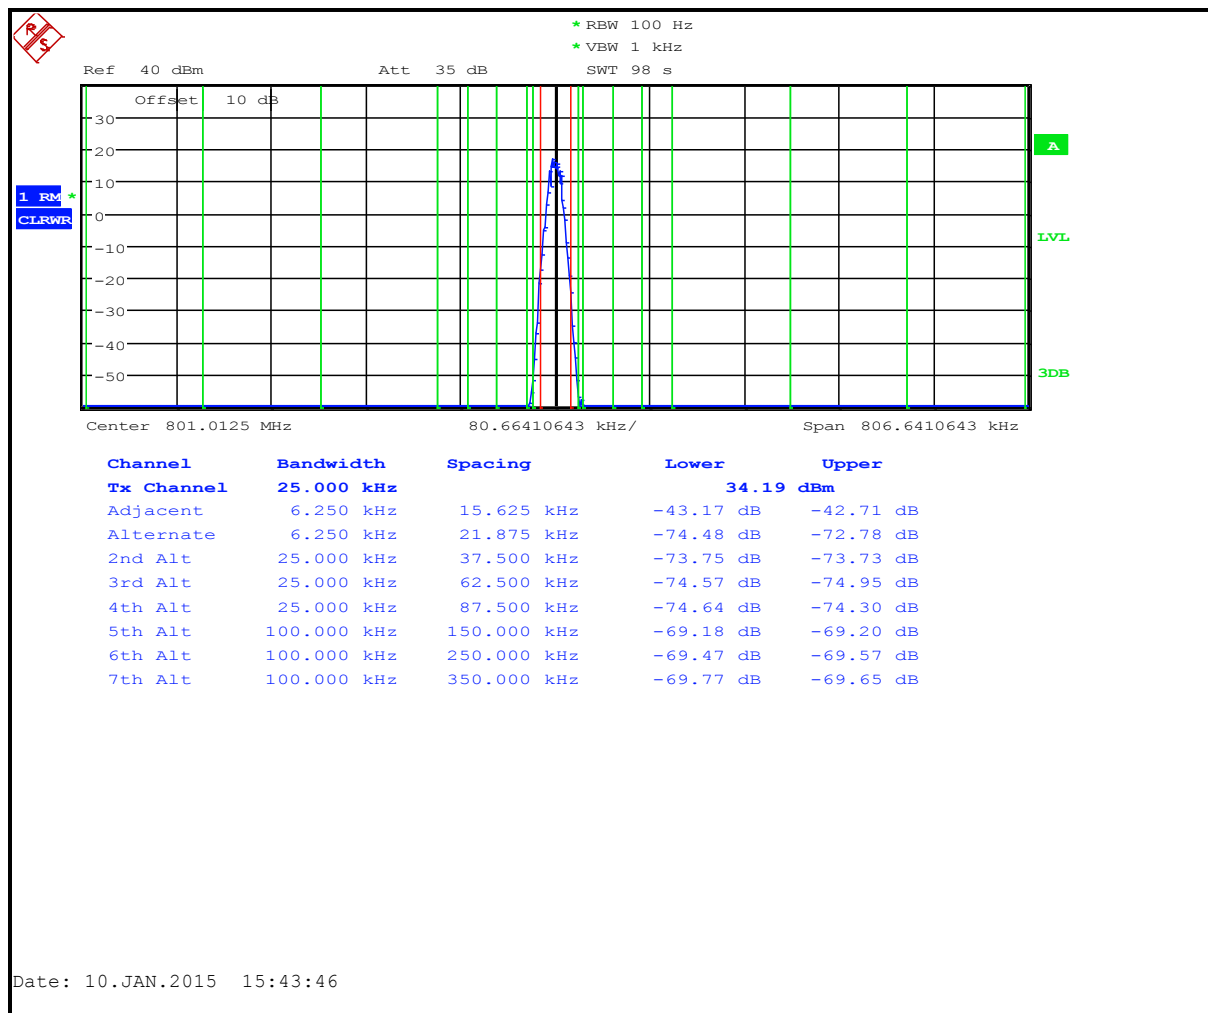


Table 6-28: Adjacent Channel Power – 801.0125 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.1
12 MHz to receive band	30(s)	-75	-99.1
In receive band	30(s)	-100	-106.7

Plot 6-29: Adjacent Channel Power – 805.0125 MHz; OTP SMR; <400 kHz

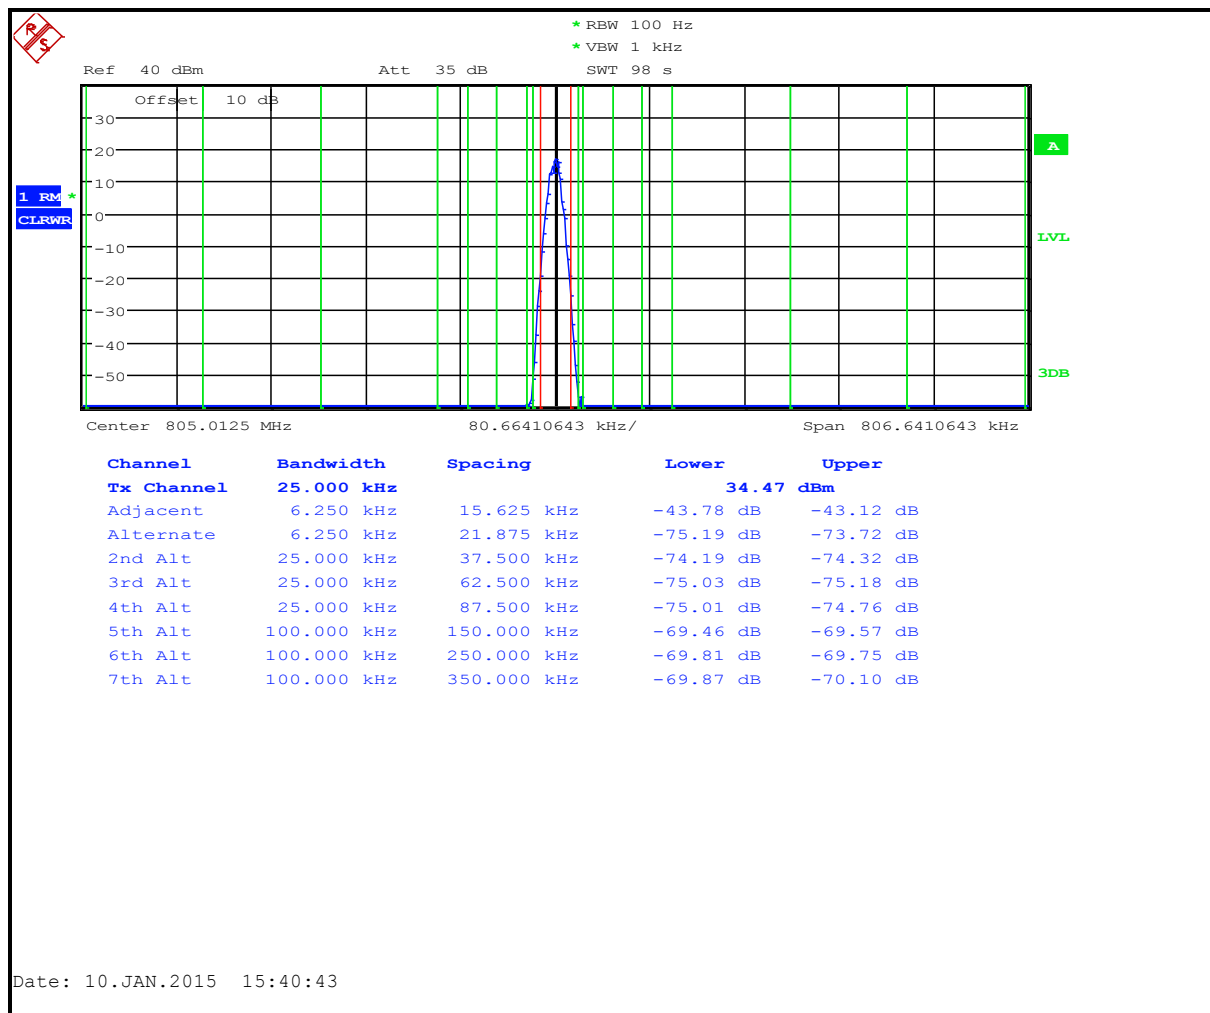


Table 6-29: Adjacent Channel Power – 805.0125 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-78.7
12 MHz to receive band	30(s)	-75	-96.1
In receive band	30(s)	-100	-106.1

Plot 6-30: Adjacent Channel Power – 805.9875 MHz; OTP SMR; <400 kHz

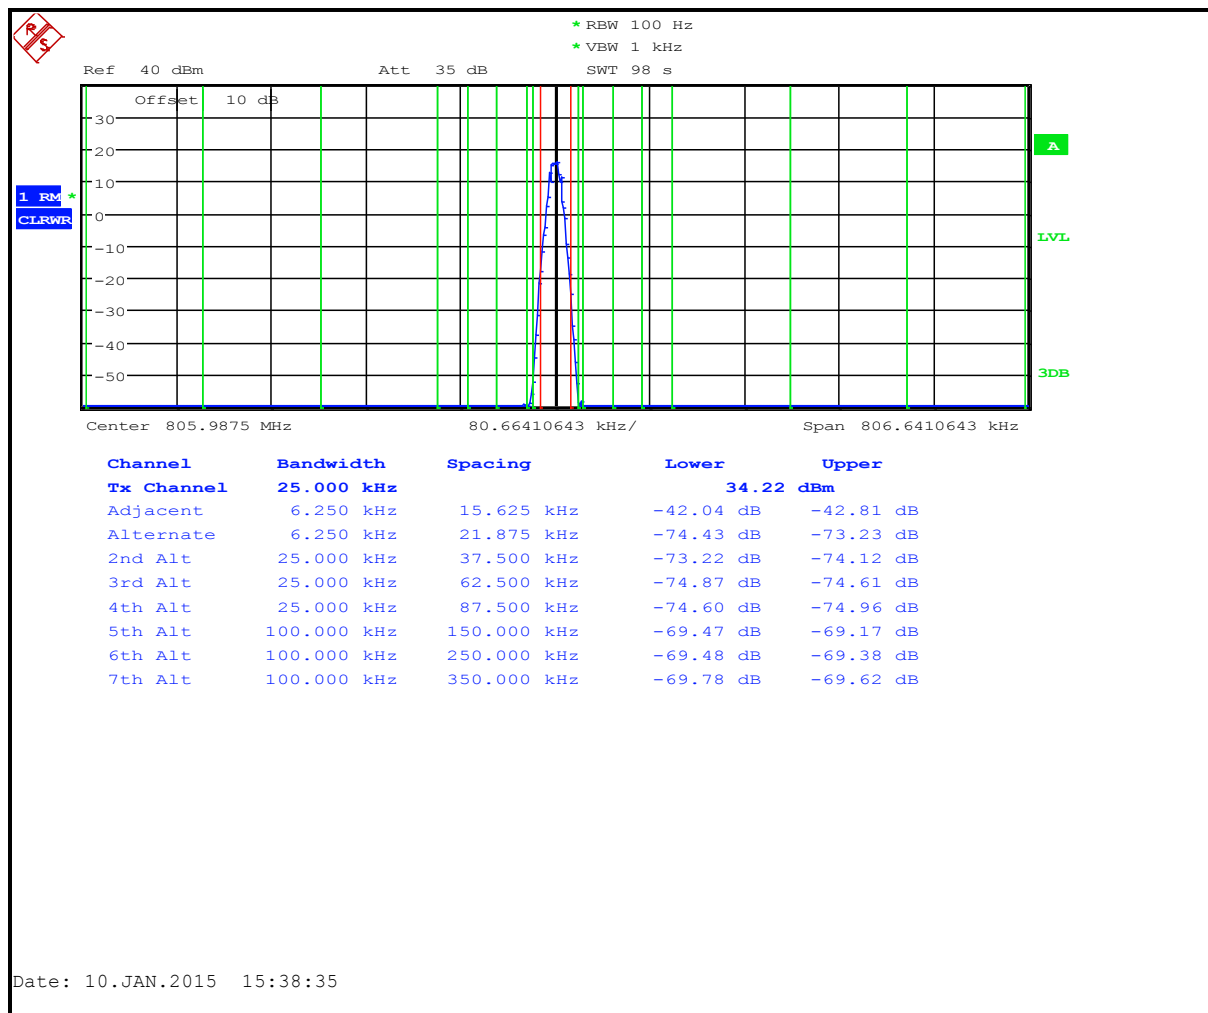


Table 6-30: Adjacent Channel Power – 805.9875 MHz; OTP SMR; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.5
12 MHz to receive band	30(s)	-75	-95.4
In receive band	30(s)	-100	-106.2

Plot 6-31: Adjacent Channel Power – 768.0125 MHz; OTP Narrowband; <400 kHz

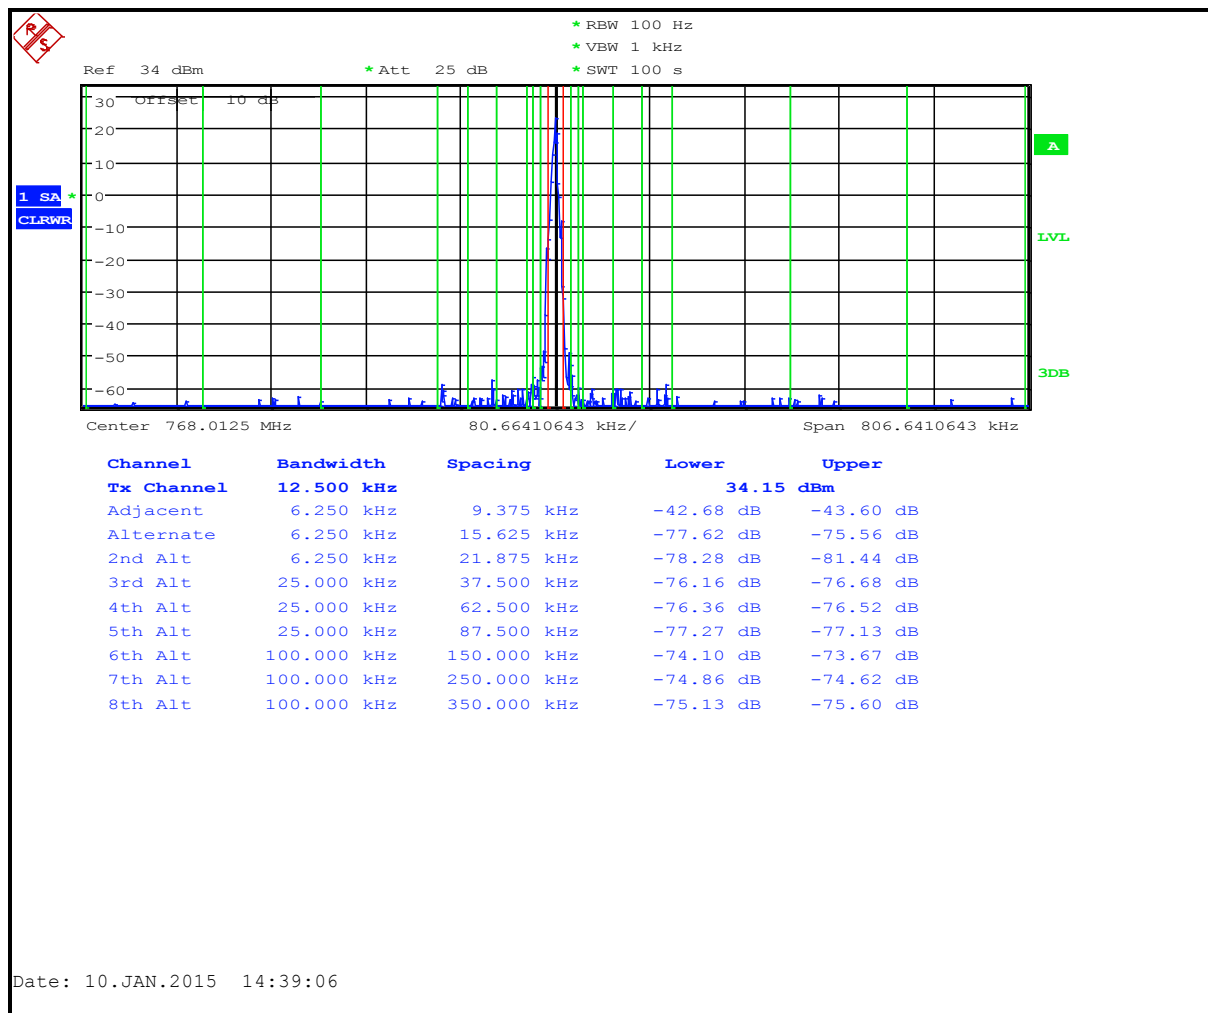


Table 6-31: Adjacent Channel Power – 768.0125 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-86.6
12 MHz to receive band	30(s)	-75	-106.2
In receive band	30(s)	-100	-106.3

Plot 6-32: Adjacent Channel Power – 769.0125 MHz; OTP Narrowband; <400 kHz

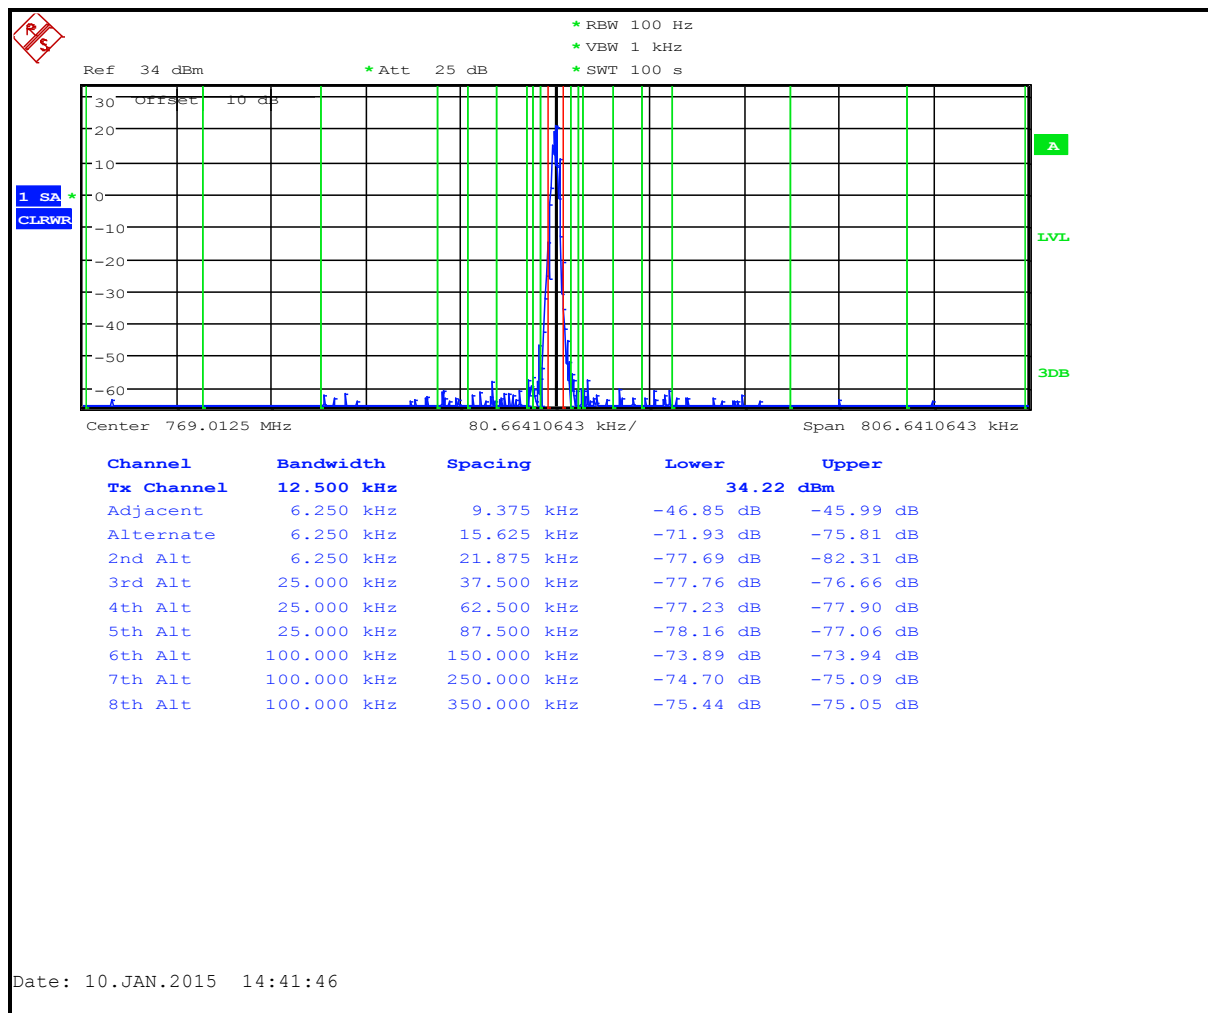


Table 6-32: Adjacent Channel Power – 769.0125 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.9
12 MHz to receive band	30(s)	-75	-107.1
In receive band	30(s)	-100	-104.3

Plot 6-33: Adjacent Channel Power – 771.0125 MHz; OTP Narrowband; <400 kHz

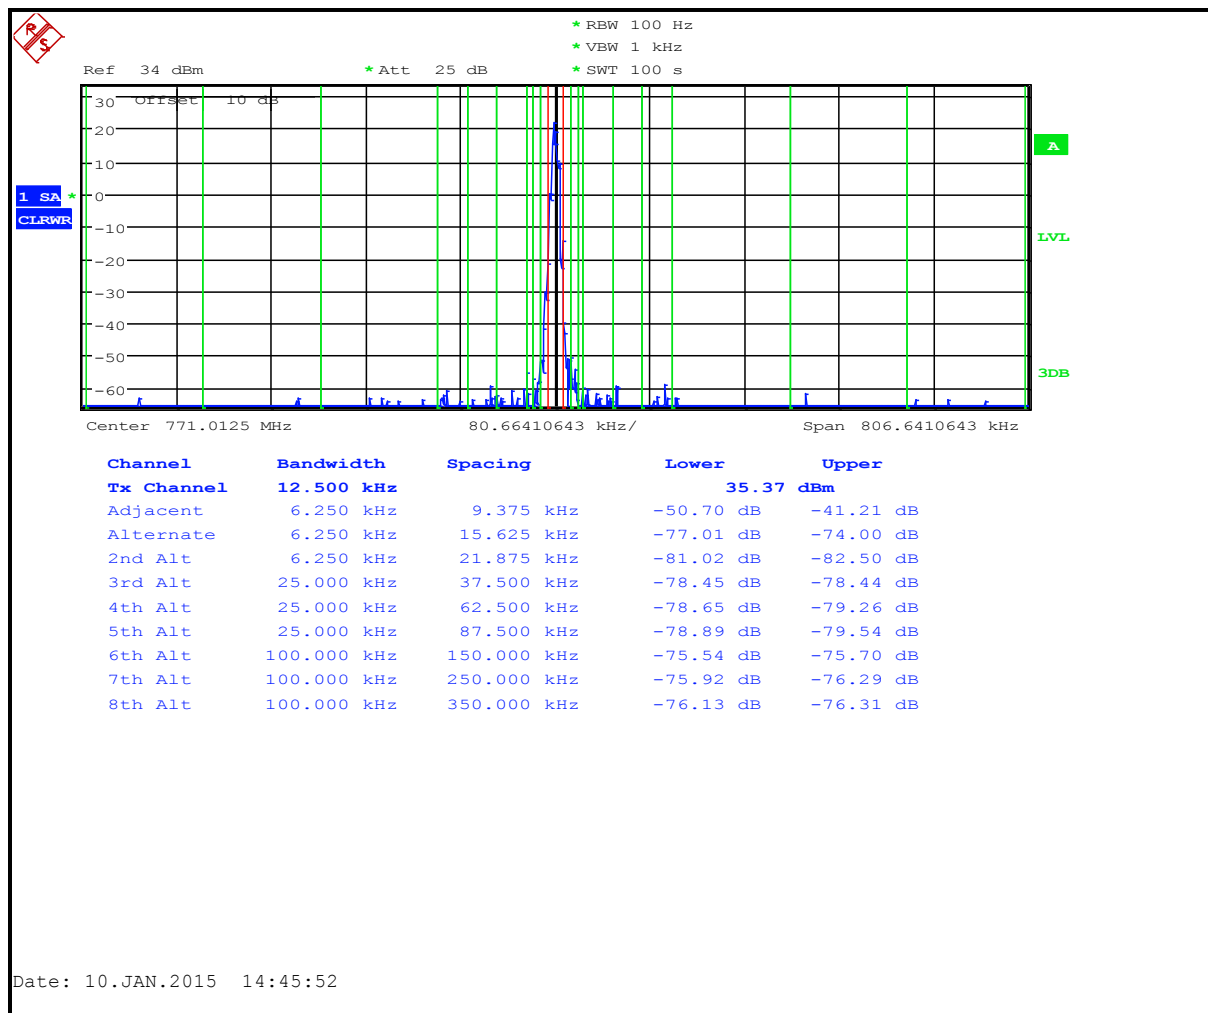


Table 6-33: Adjacent Channel Power – 771.0125 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.2
12 MHz to receive band	30(s)	-75	-106.2
In receive band	30(s)	-100	-106.5

Plot 6-34: Adjacent Channel Power – 775.0125 MHz; OTP Narrowband; <400 kHz

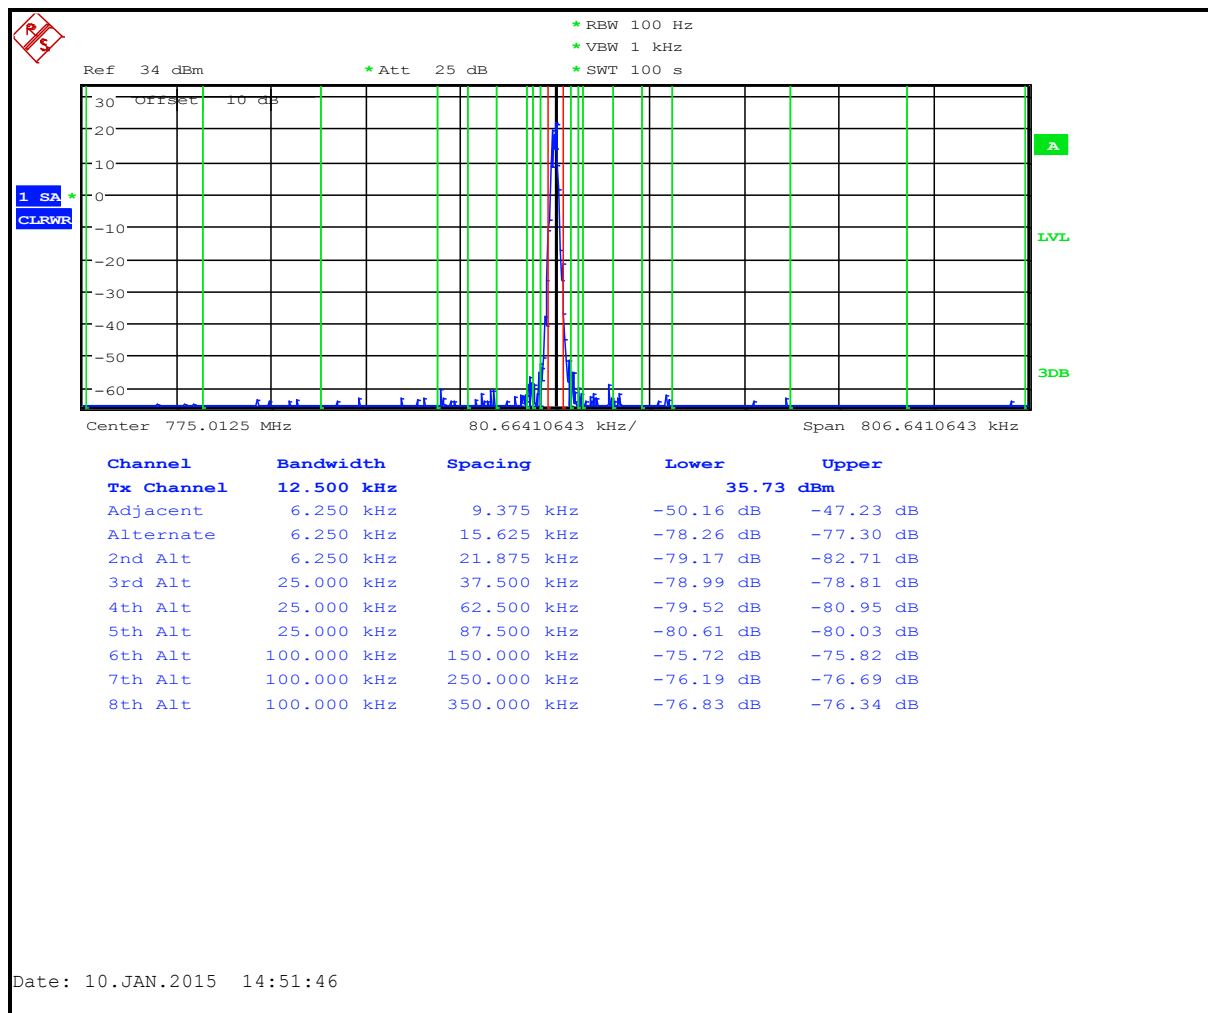


Table 6-34: Adjacent Channel Power – 775.0125 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.7
12 MHz to receive band	30(s)	-75	-104.0
In receive band	30(s)	-100	-107.2

Plot 6-35: Adjacent Channel Power – 775.9875 MHz; OTP Narrowband; <400 kHz

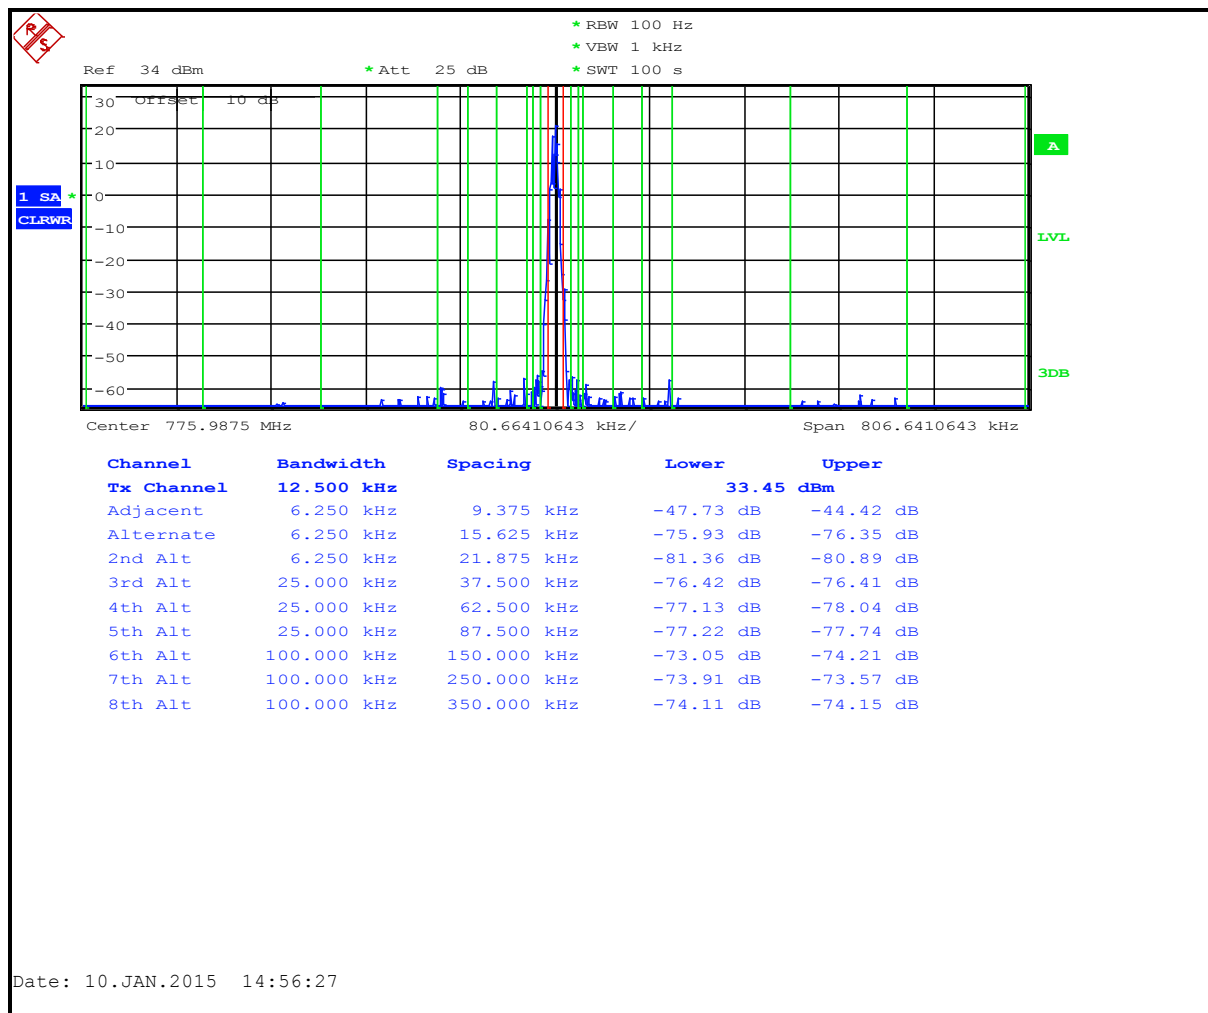


Table 6-35: Adjacent Channel Power – 775.9875 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.7
12 MHz to receive band	30(s)	-75	-100.1
In receive band	30(s)	-100	-106.3

Plot 6-36: Adjacent Channel Power – 798.0125 MHz; OTP Narrowband; <400 kHz

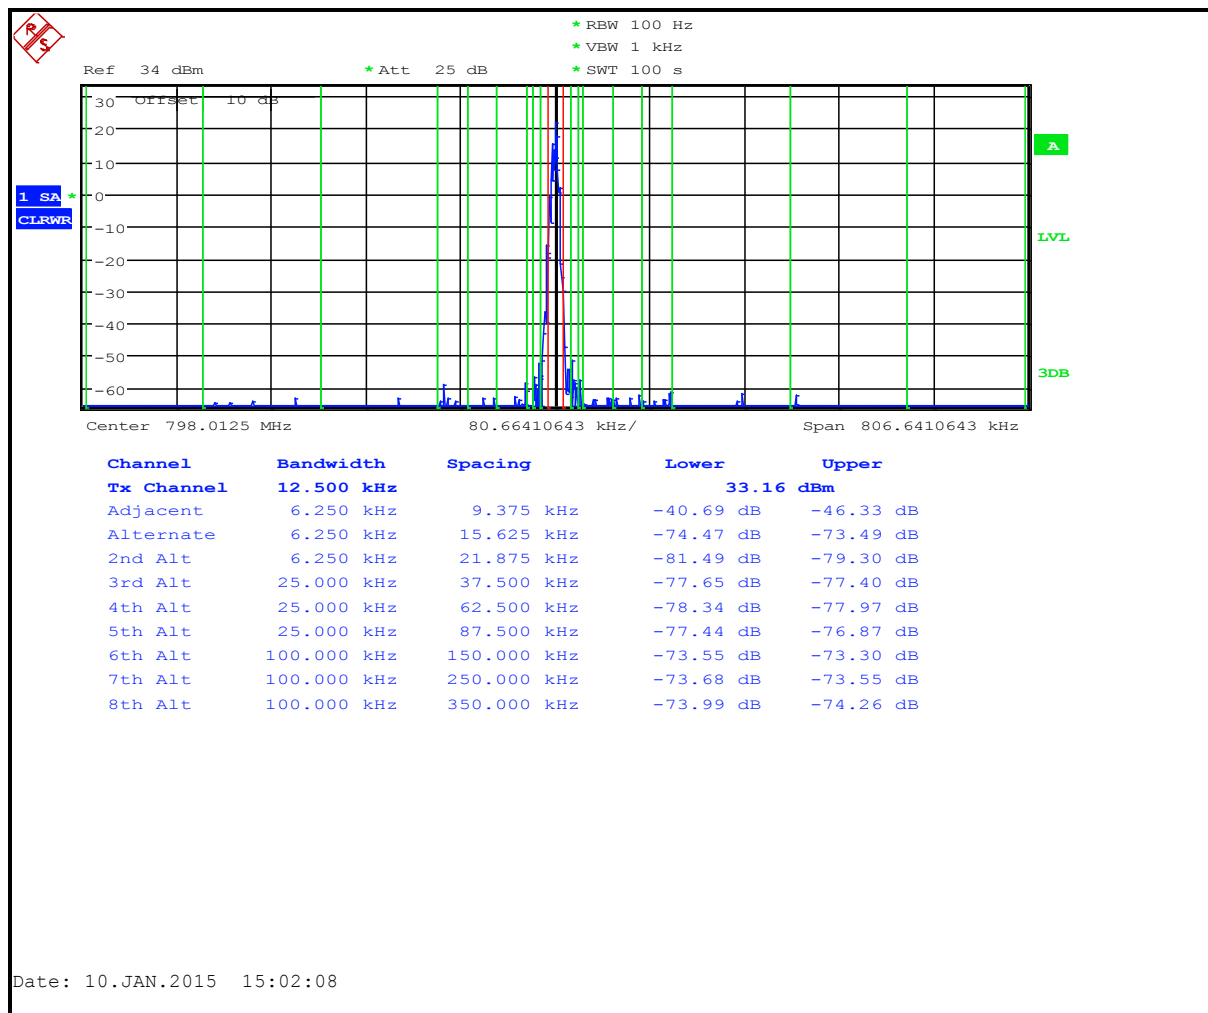


Table 6-36: Adjacent Channel Power – 798.0125 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.3
12 MHz to receive band	30(s)	-75	-98.6
In receive band	30(s)	-100	-101.8

Plot 6-37: Adjacent Channel Power – 799.0125 MHz; OTP Narrowband; <400 kHz

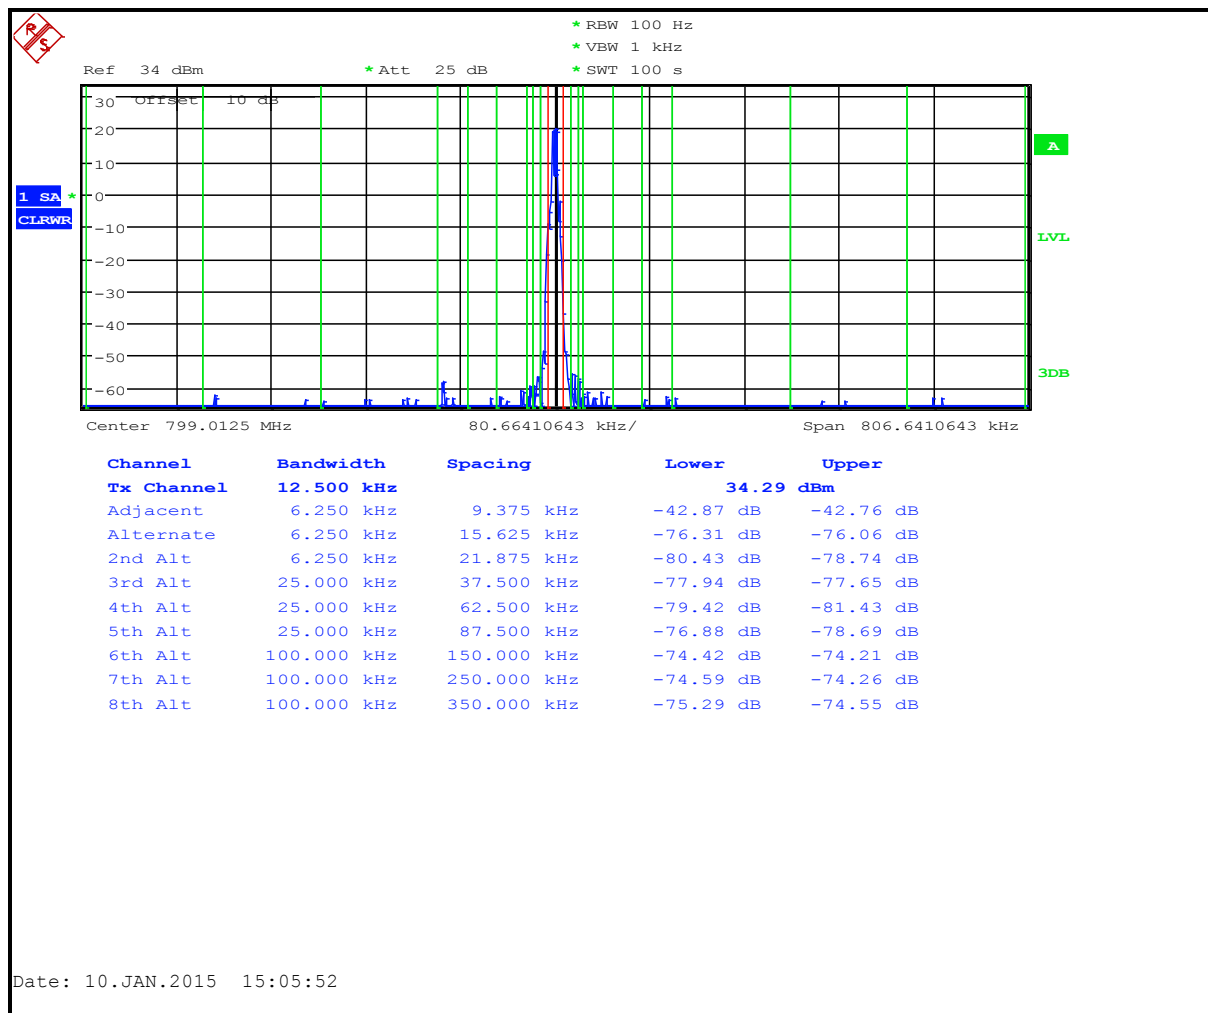


Table 6-37: Adjacent Channel Power – 799.0125 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.0
12 MHz to receive band	30(s)	-75	-98.7
In receive band	30(s)	-100	-102.6

Plot 6-38: Adjacent Channel Power – 801.0125 MHz; OTP Narrowband; <400 kHz

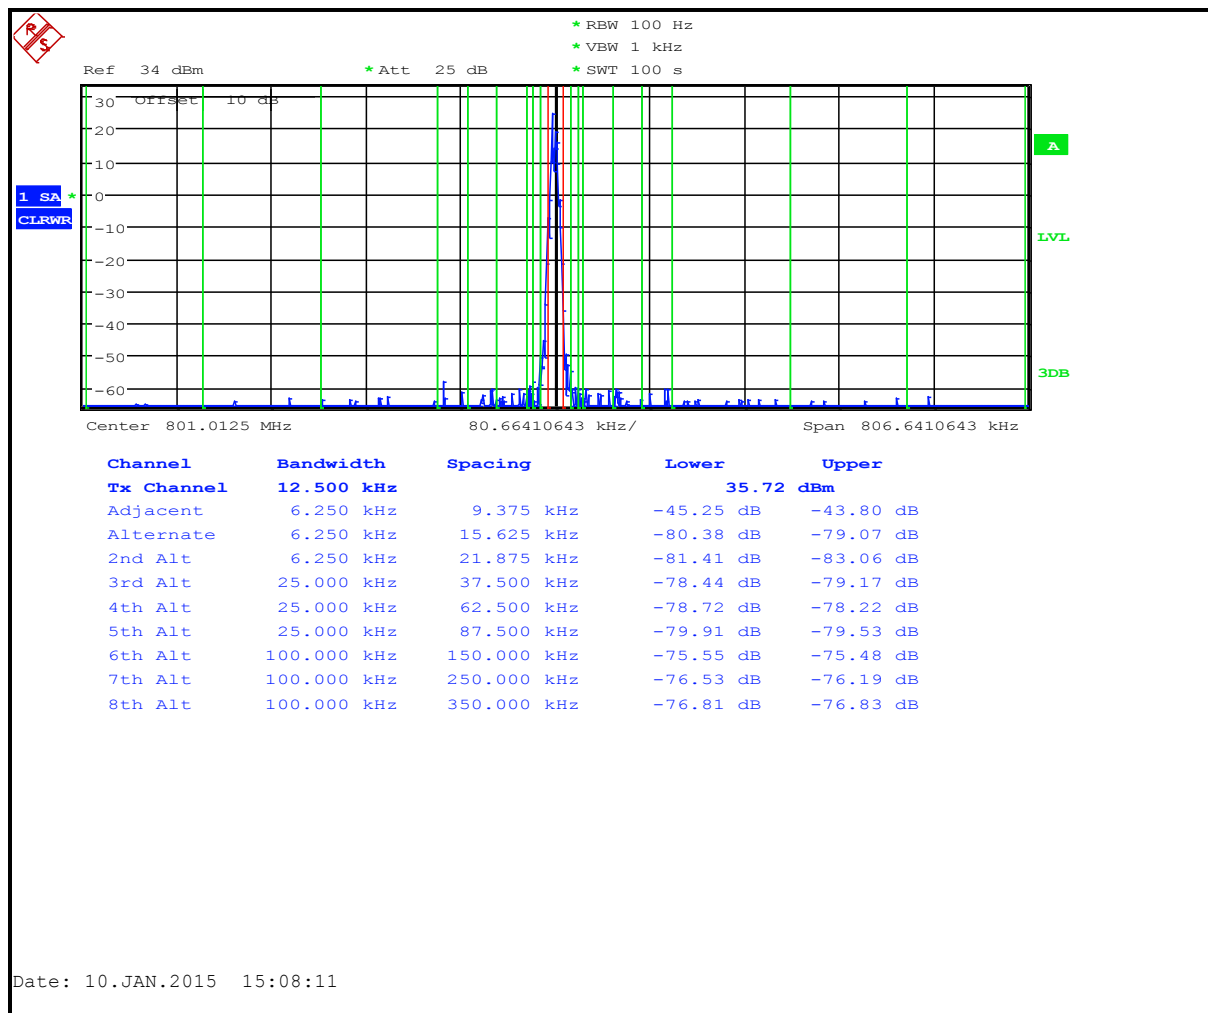


Table 6-38: Adjacent Channel Power – 801.0125 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.7
12 MHz to receive band	30(s)	-75	-98.9
In receive band	30(s)	-100	-102.8

Plot 6-39: Adjacent Channel Power – 805.0125 MHz; OTP Narrowband; <400 kHz

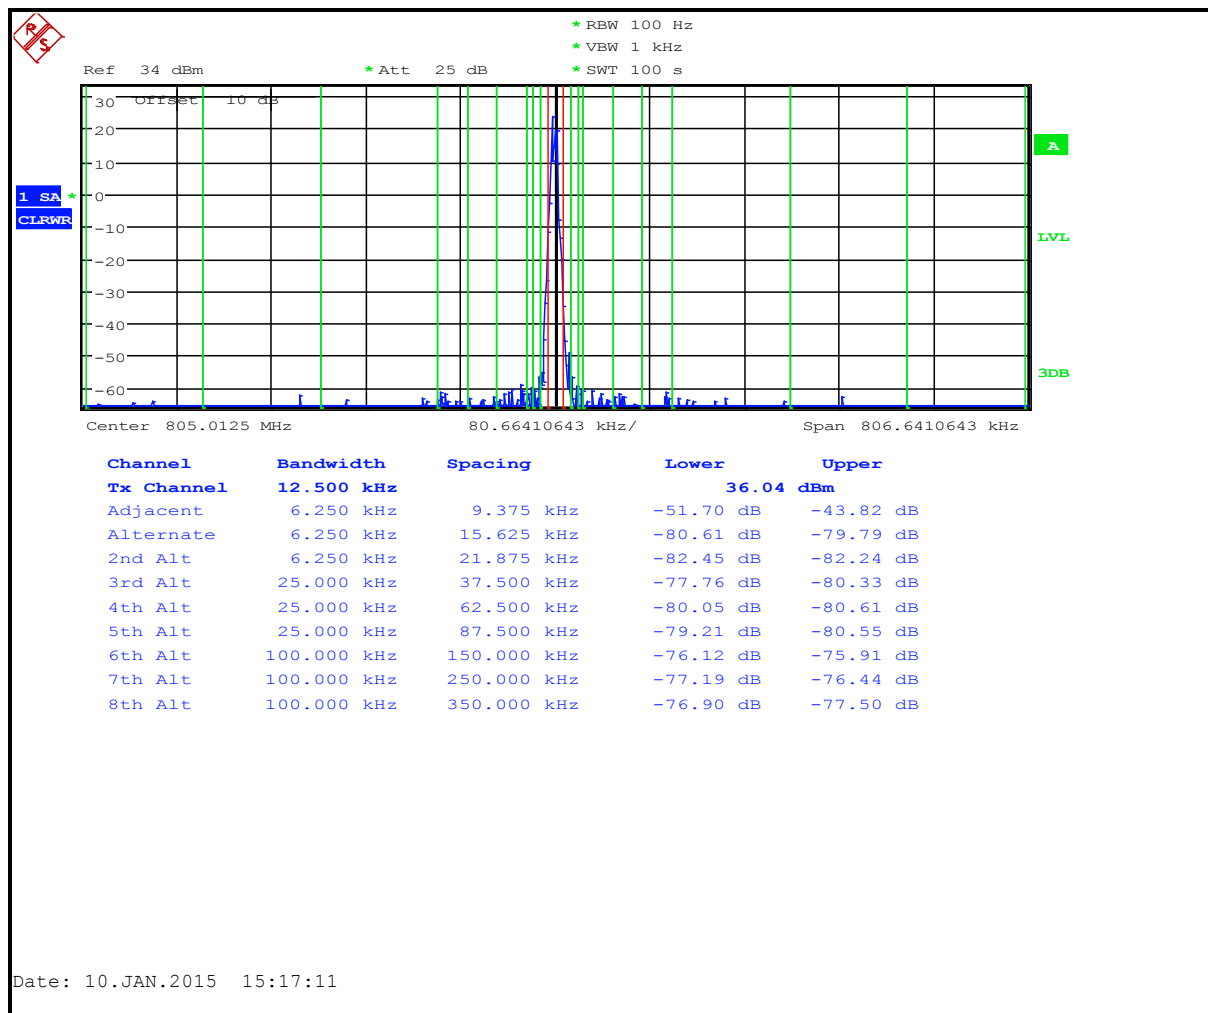


Table 6-39: Adjacent Channel Power – 805.0125 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.4
12 MHz to receive band	30(s)	-75	-94.7
In receive band	30(s)	-100	-106.0

Plot 6-40: Adjacent Channel Power – 805.9875 MHz; OTP Narrowband; <400 kHz

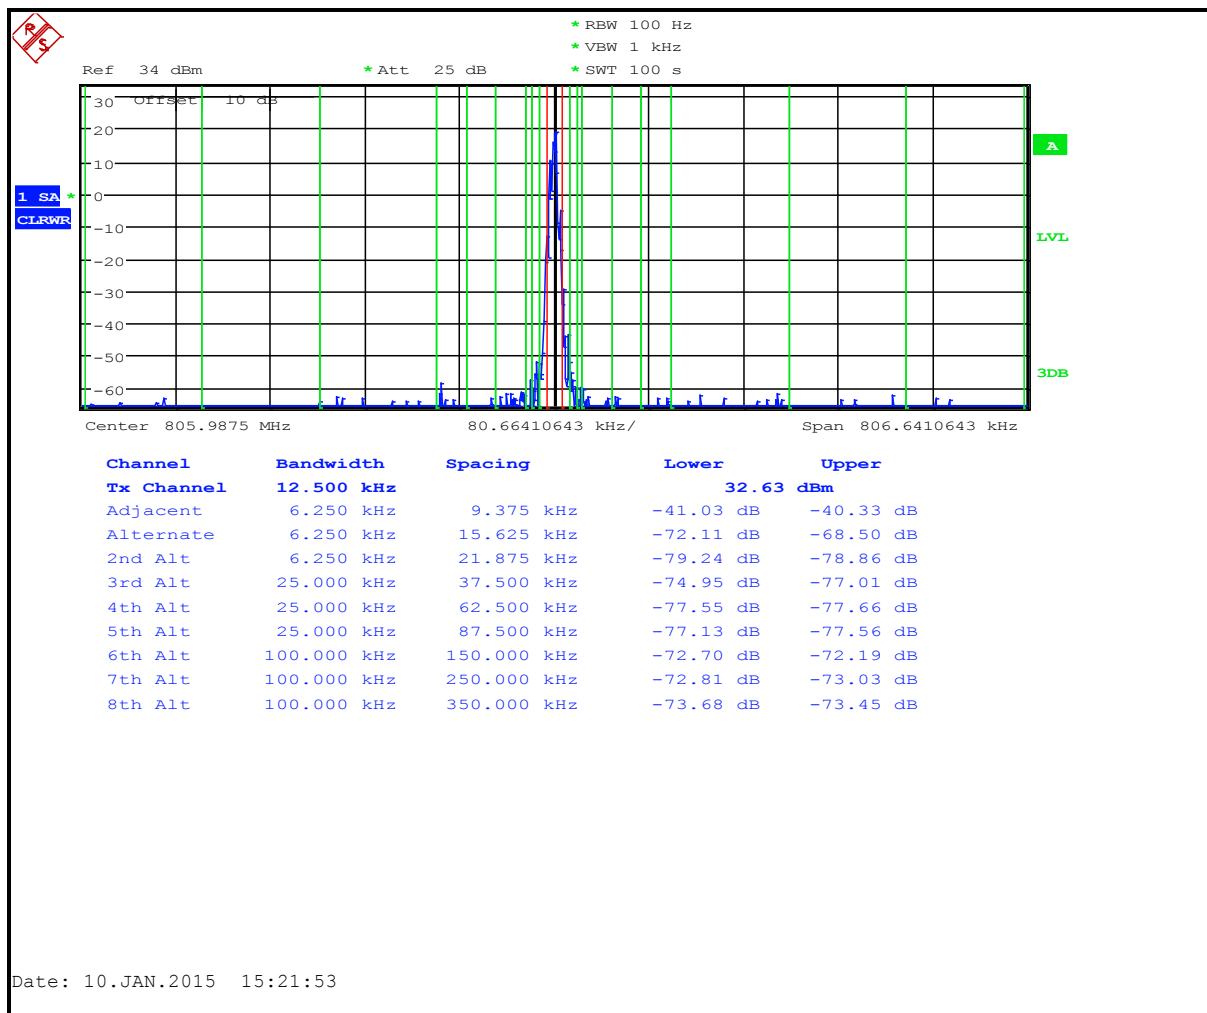


Table 6-40: Adjacent Channel Power – 805.9875 MHz; OTP Narrowband; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.0
12 MHz to receive band	30(s)	-75	-93.4
In receive band	30(s)	-100	-107.2

Plot 6-41: Adjacent Channel Power – 768.0125 MHz; P25; <400 kHz

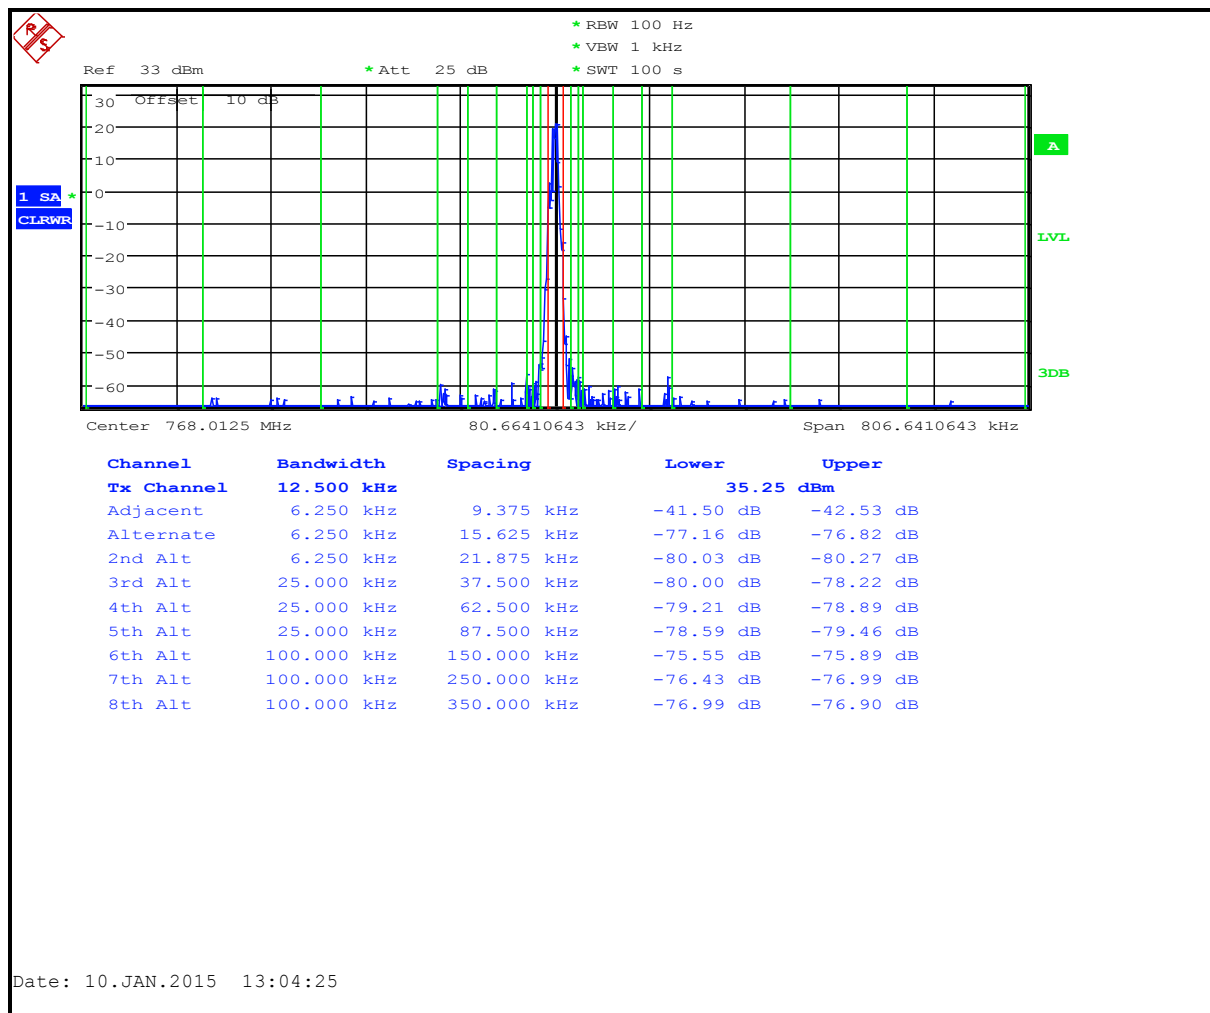


Table 6-41: Adjacent Channel Power – 768.0125 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-86.1
12 MHz to receive band	30(s)	-75	-108.3
In receive band	30(s)	-100	-107.5

Plot 6-42: Adjacent Channel Power – 769.0125 MHz; P25; <400 kHz

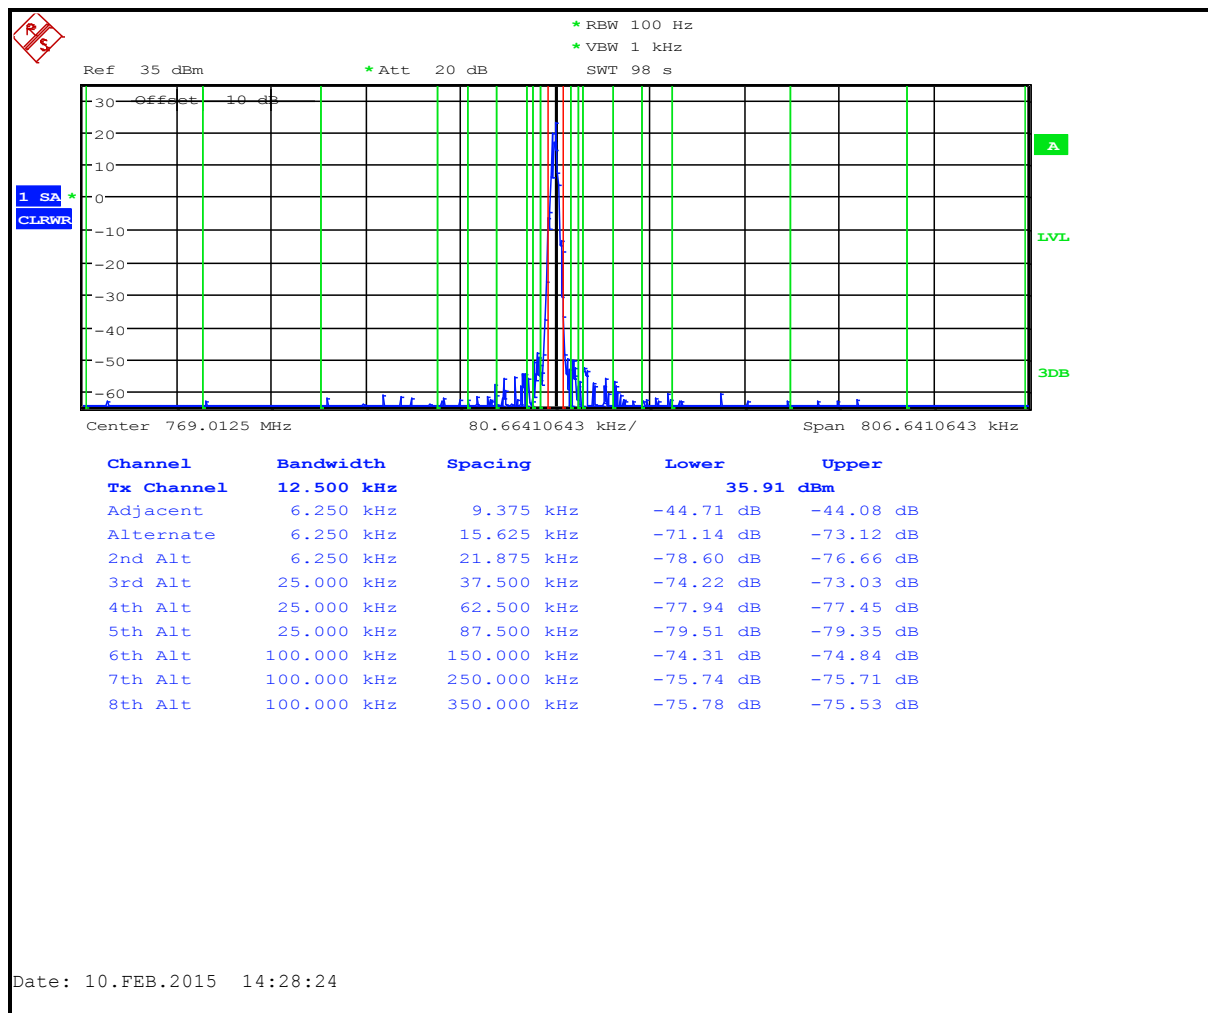


Table 6-42: Adjacent Channel Power – 769.0125 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.6
12 MHz to receive band	30(s)	-75	-105.0
In receive band	30(s)	-100	-107.0

Plot 6-43: Adjacent Channel Power – 771.0125 MHz; P25; <400 kHz

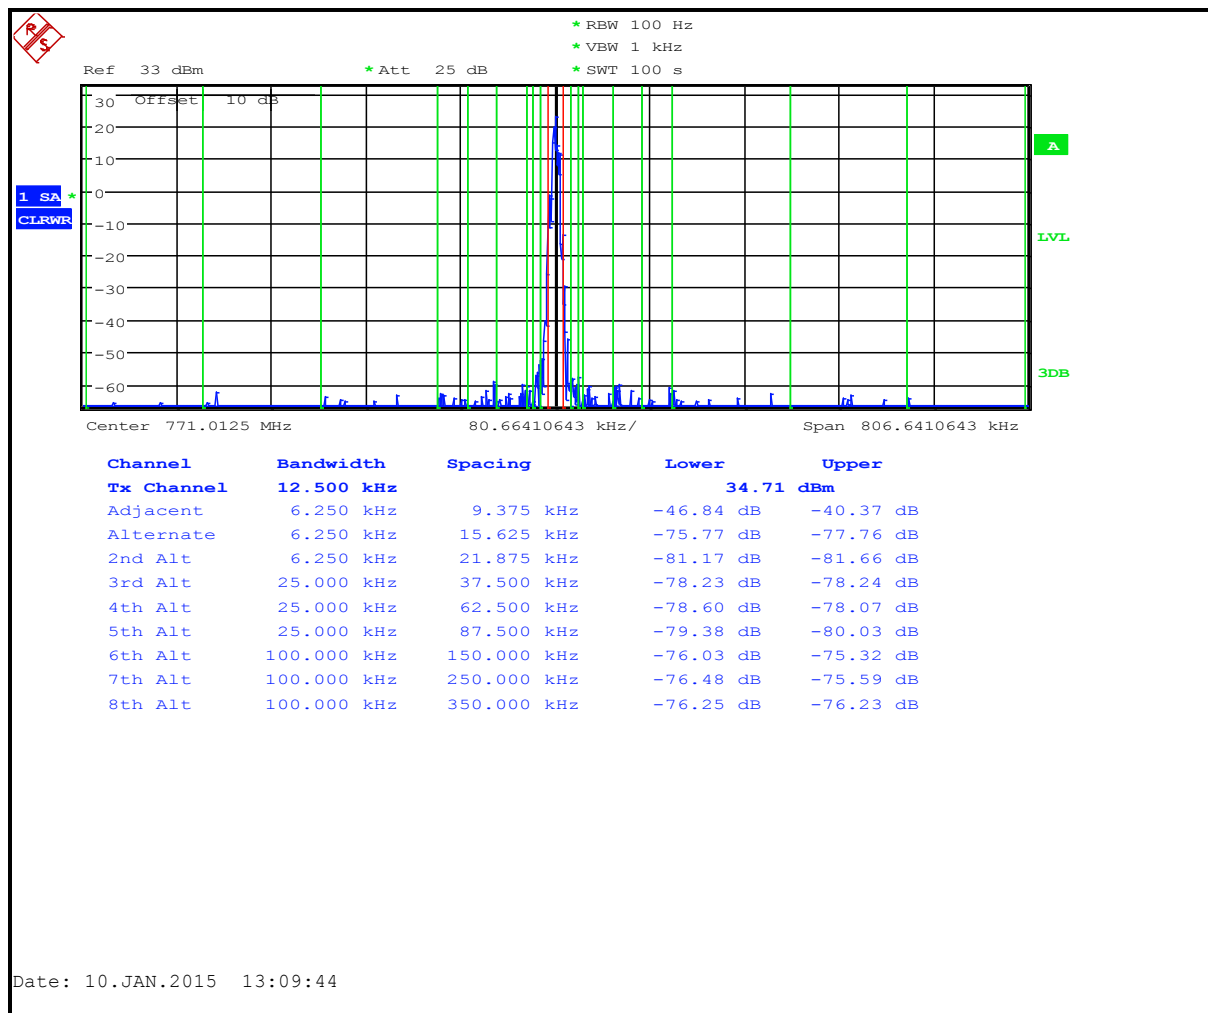


Table 6-43: Adjacent Channel Power – 771.0125 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-82.6
12 MHz to receive band	30(s)	-75	-106.8
In receive band	30(s)	-100	-106.5

Plot 6-44: Adjacent Channel Power – 775.0125 MHz; P25; <400 kHz

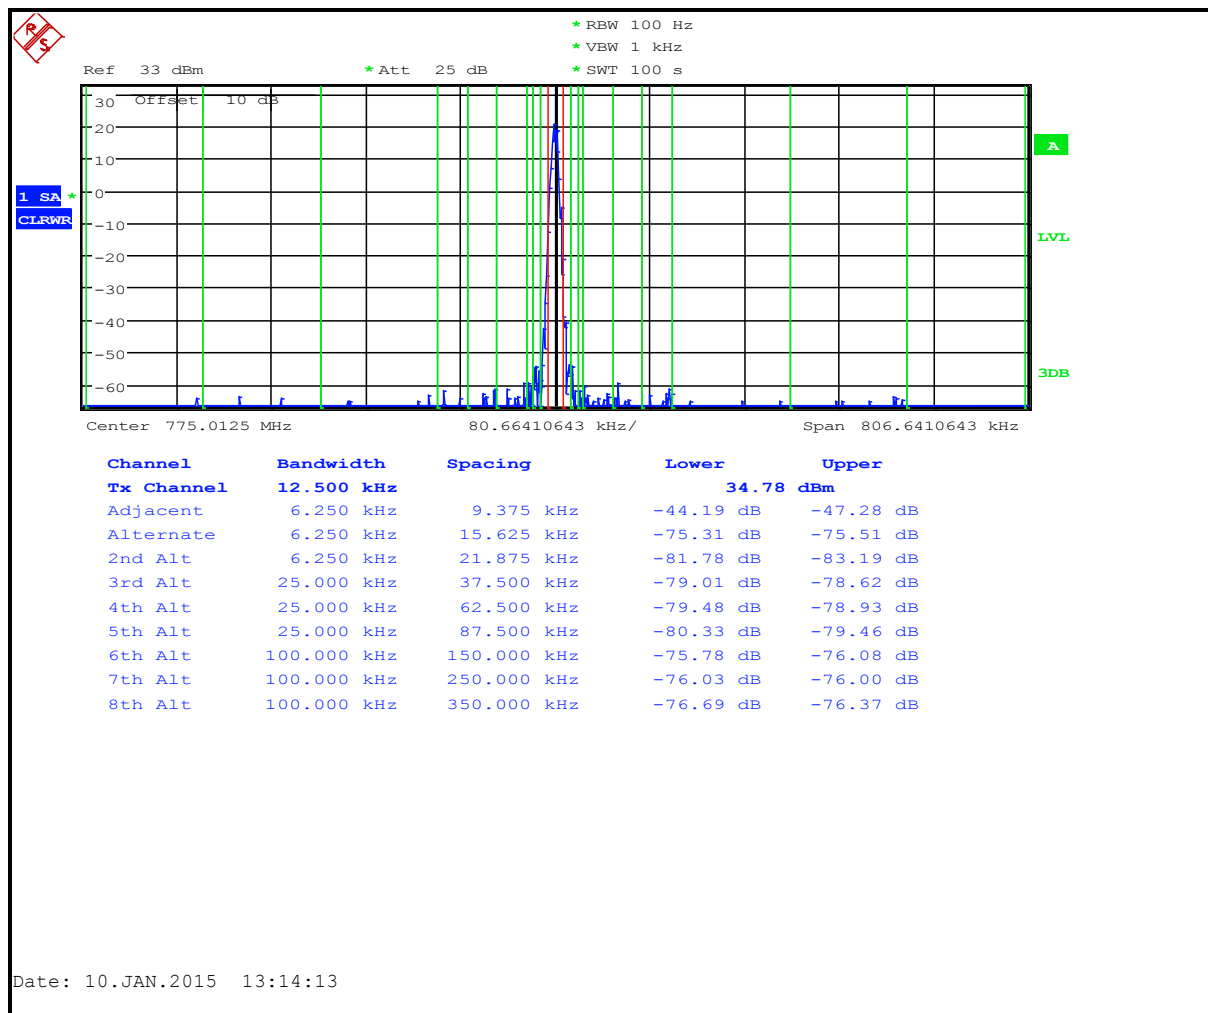


Table 6-44: Adjacent Channel Power – 775.0125 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-77.2
12 MHz to receive band	30(s)	-75	-103.0
In receive band	30(s)	-100	-107.5

Plot 6-45: Adjacent Channel Power – 775.9875 MHz; P25; <400 kHz

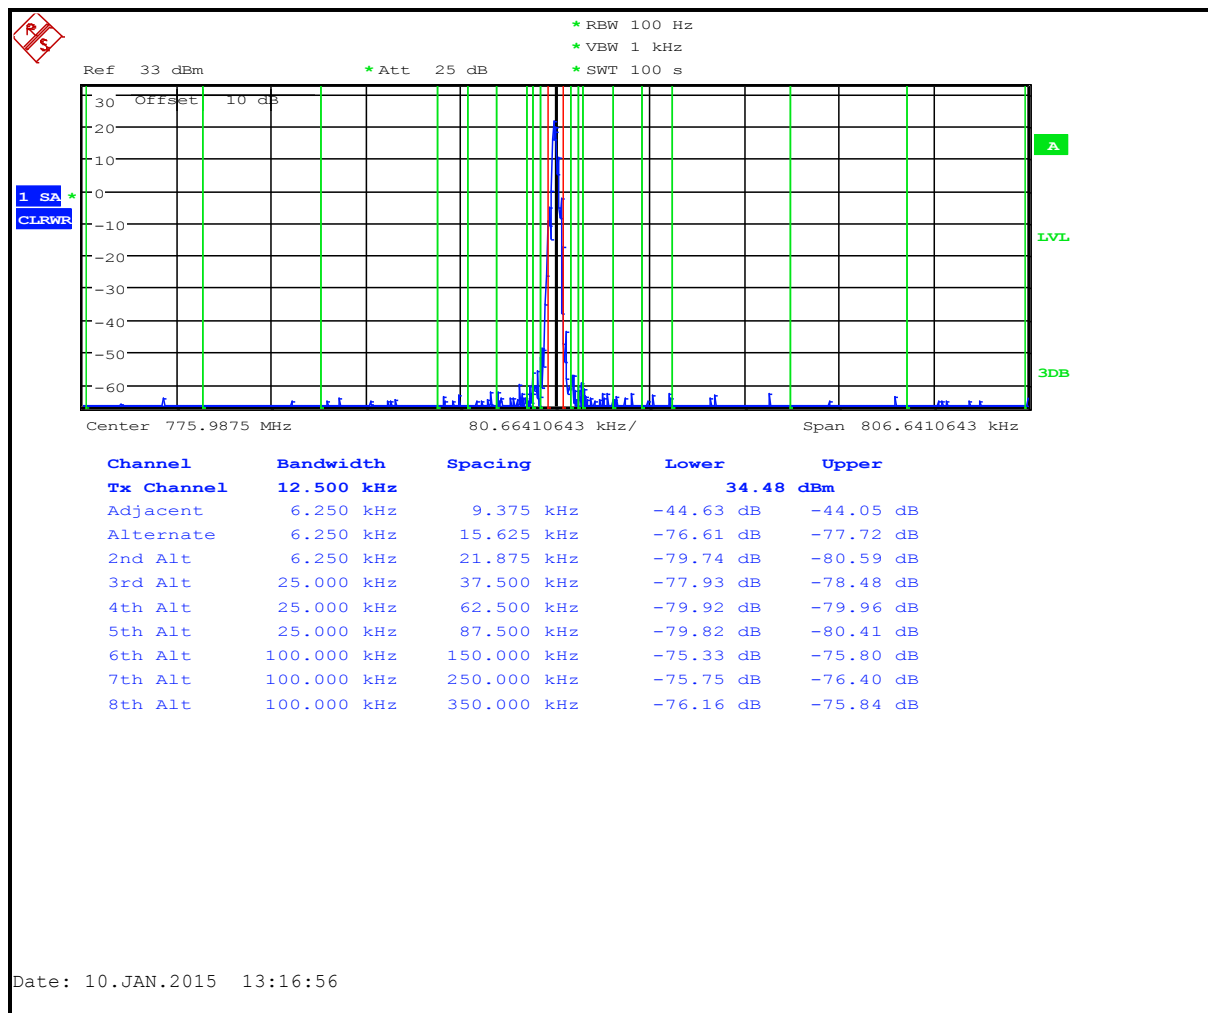


Table 6-45: Adjacent Channel Power – 775.9875 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.7
12 MHz to receive band	30(s)	-75	-101.2
In receive band	30(s)	-100	-106.1

Plot 6-46: Adjacent Channel Power – 798.0125 MHz; P25; <400 kHz

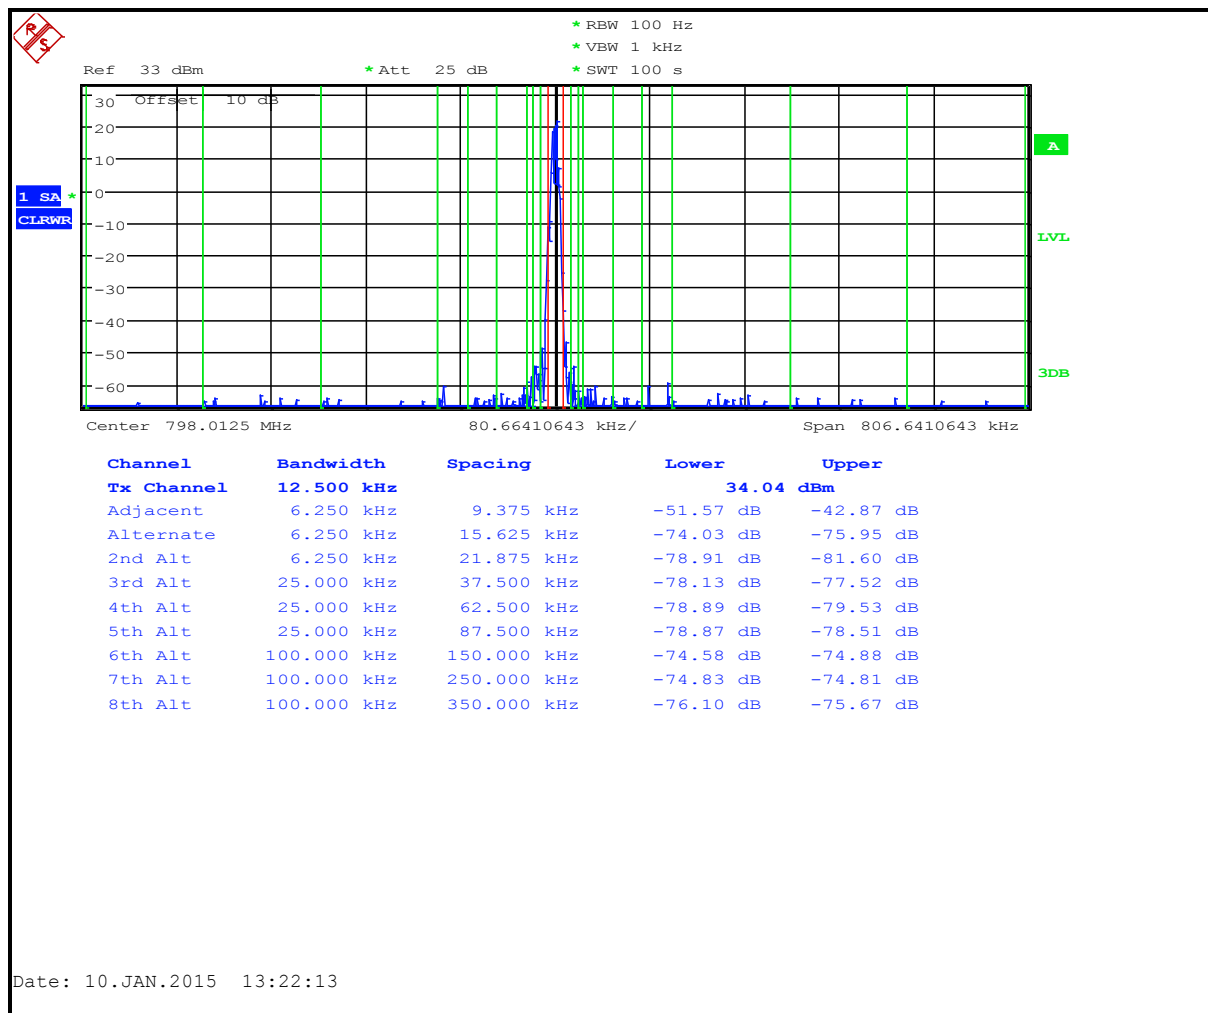


Table 6-46: Adjacent Channel Power – 798.0125 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-78.6
12 MHz to receive band	30(s)	-75	-96.4
In receive band	30(s)	-100	-100.9

Plot 6-47: Adjacent Channel Power – 799.0125 MHz; P25; <400 kHz

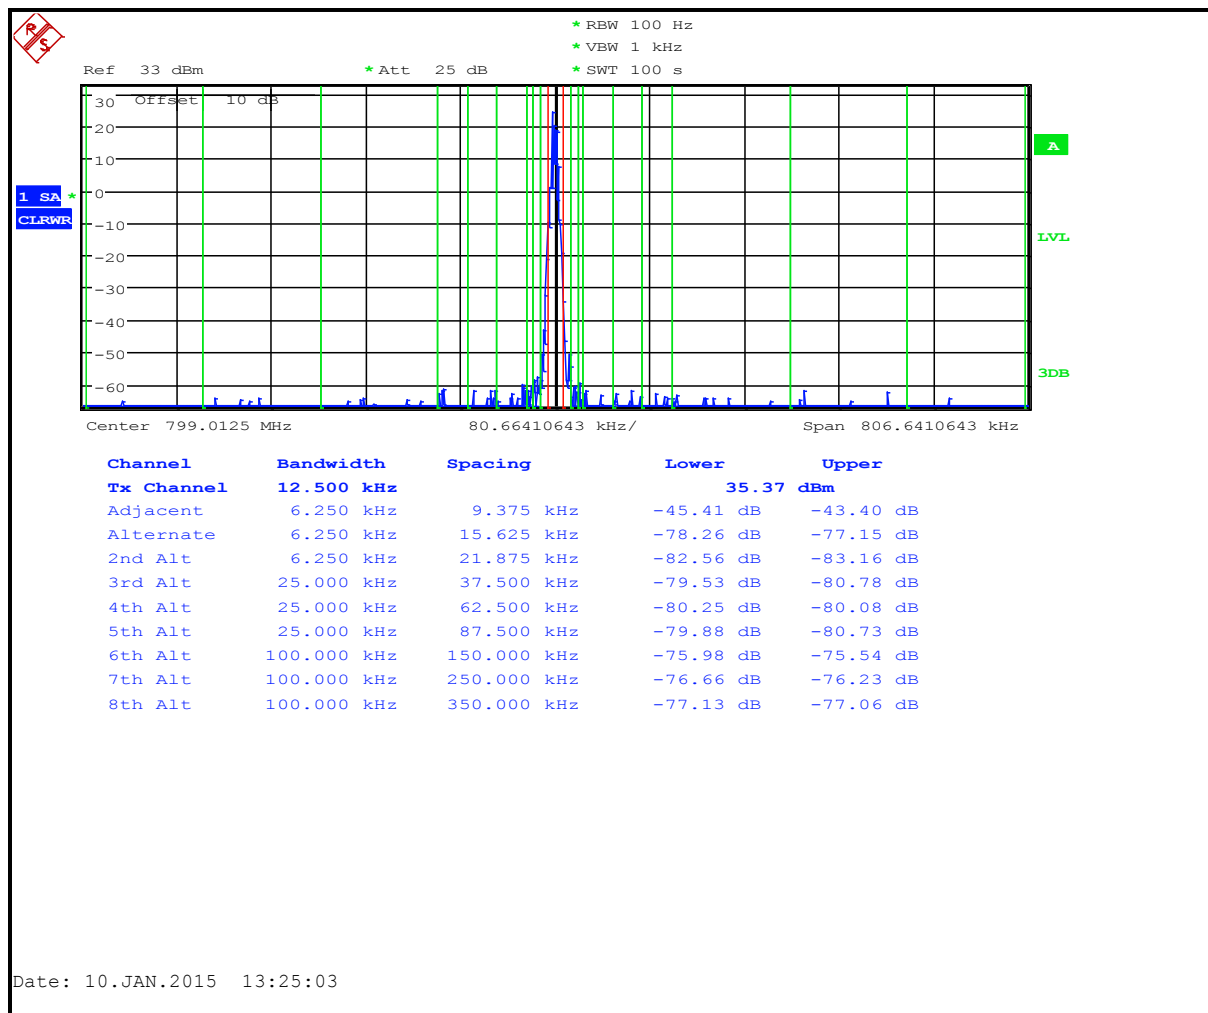


Table 6-47: Adjacent Channel Power – 799.0125 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.6
12 MHz to receive band	30(s)	-75	-99.1
In receive band	30(s)	-100	-101.6

Plot 6-48: Adjacent Channel Power – 801.0125 MHz; P25; <400 kHz

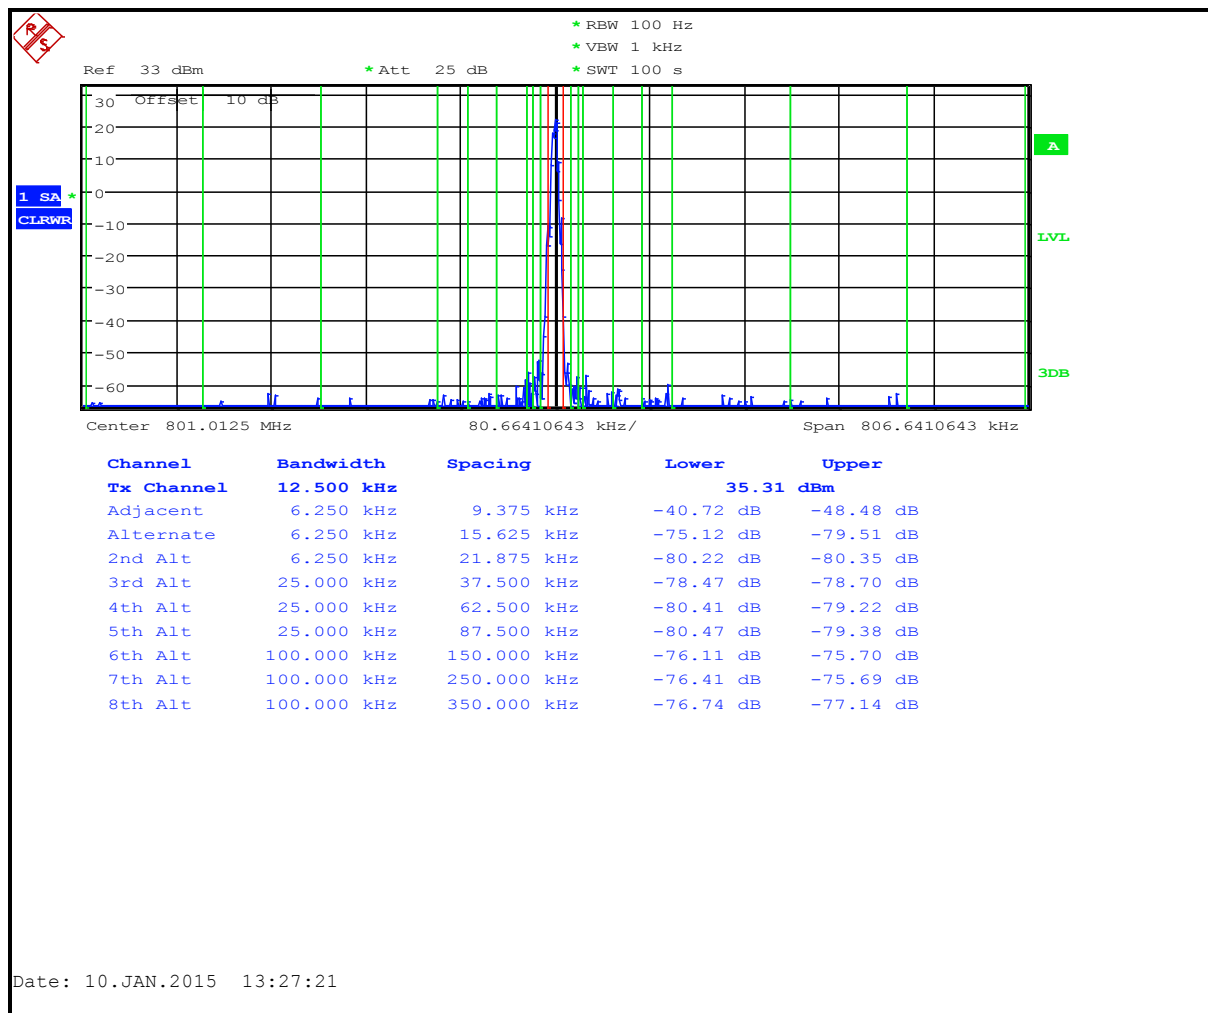


Table 6-48: Adjacent Channel Power – 801.0125 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.9
12 MHz to receive band	30(s)	-75	-100.0
In receive band	30(s)	-100	-105.8

Plot 6-49: Adjacent Channel Power – 805.0125 MHz; P25; <400 kHz

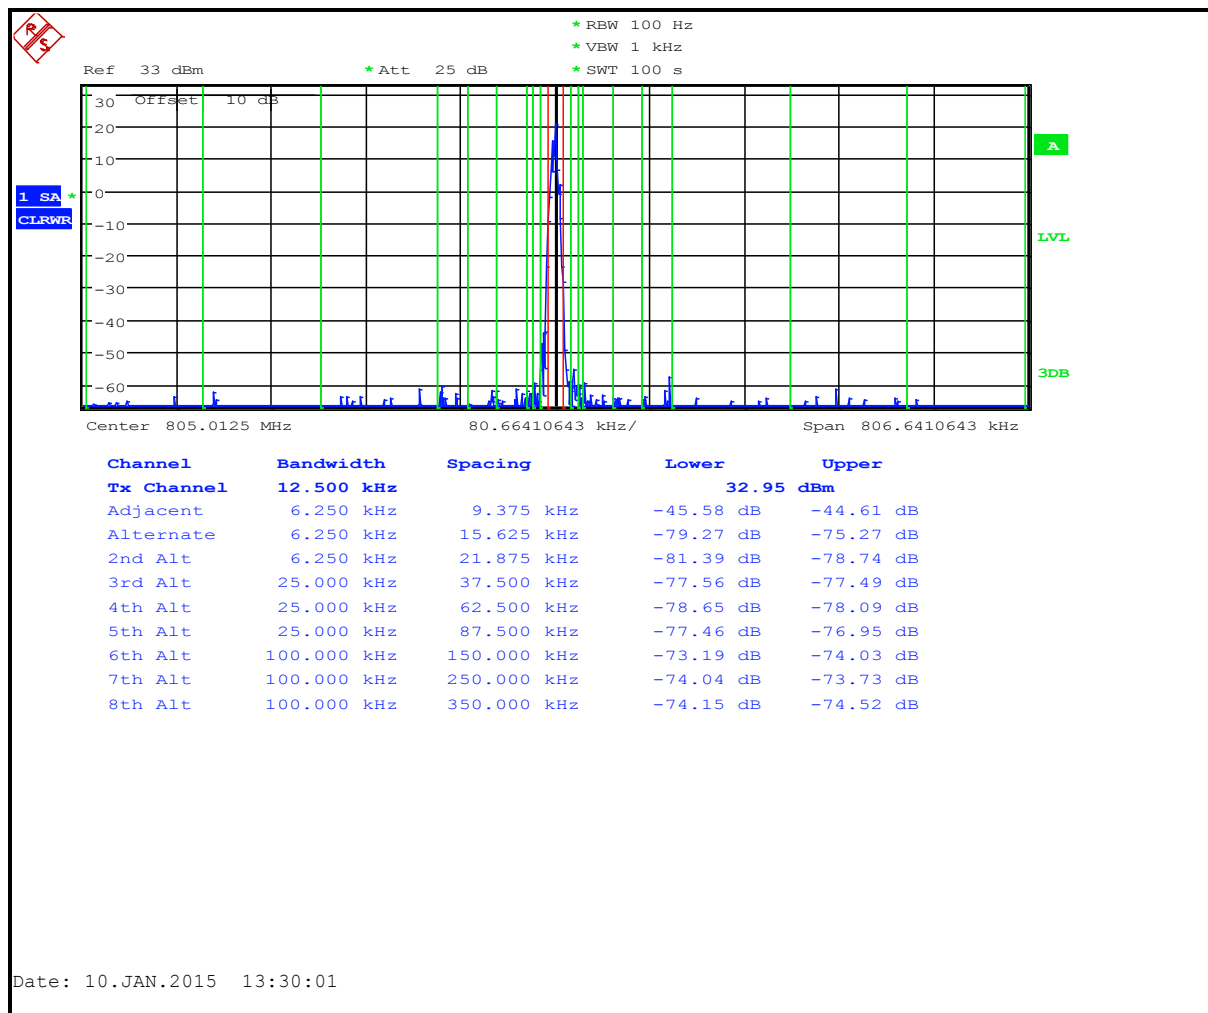


Table 6-49: Adjacent Channel Power – 805.0125 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.9
12 MHz to receive band	30(s)	-75	-96.5
In receive band	30(s)	-100	-107.4

Plot 6-50: Adjacent Channel Power – 805.9875 MHz; P25; <400 kHz

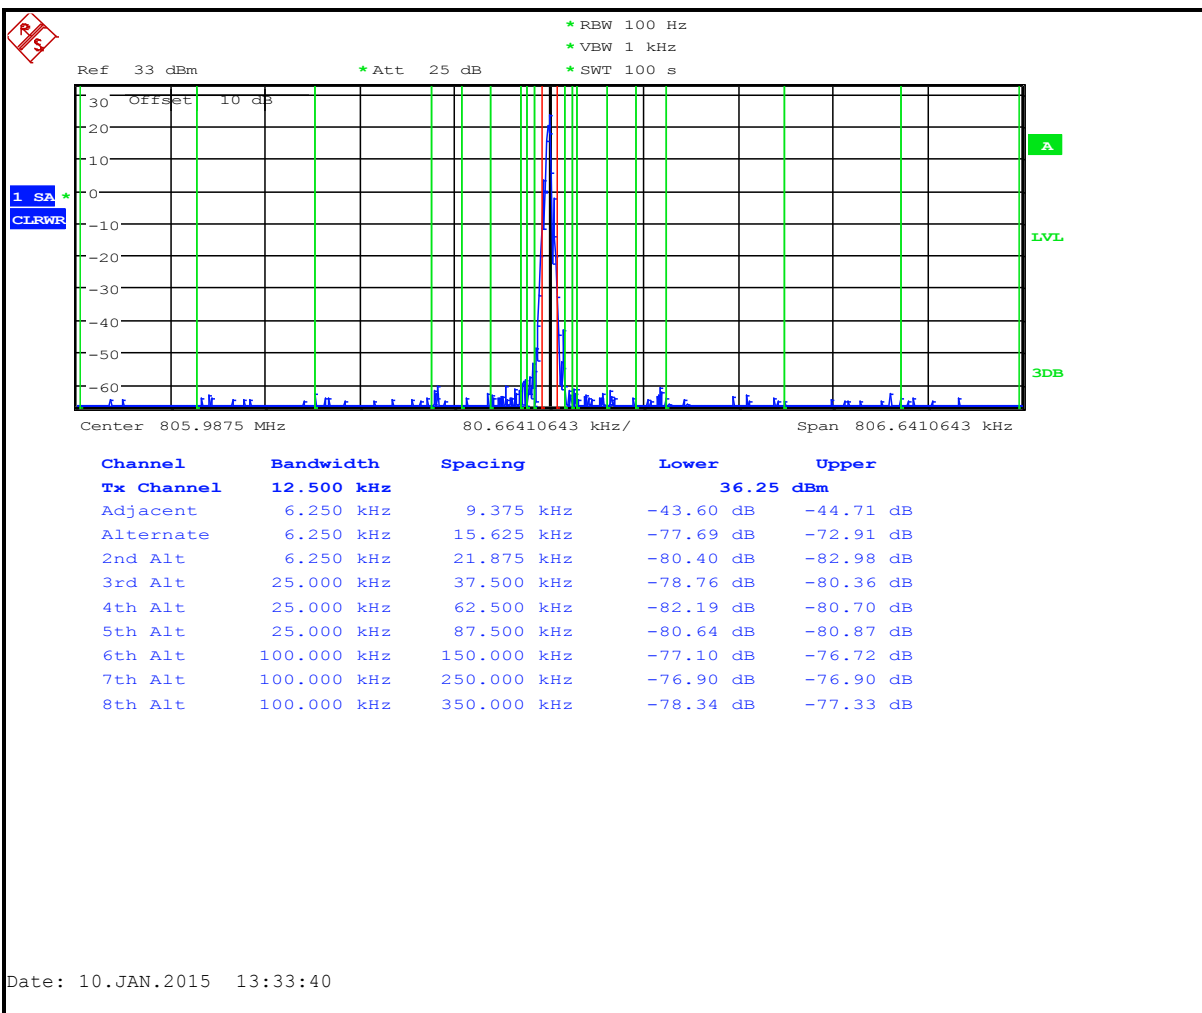


Table 6-50: Adjacent Channel Power – 805.9875 MHz; P25; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.2
12 MHz to receive band	30(s)	-75	-95.8
In receive band	30(s)	-100	-106.8

Plot 6-51: Adjacent Channel Power – 768.0125 MHz; P25 Phase 2; <400 kHz

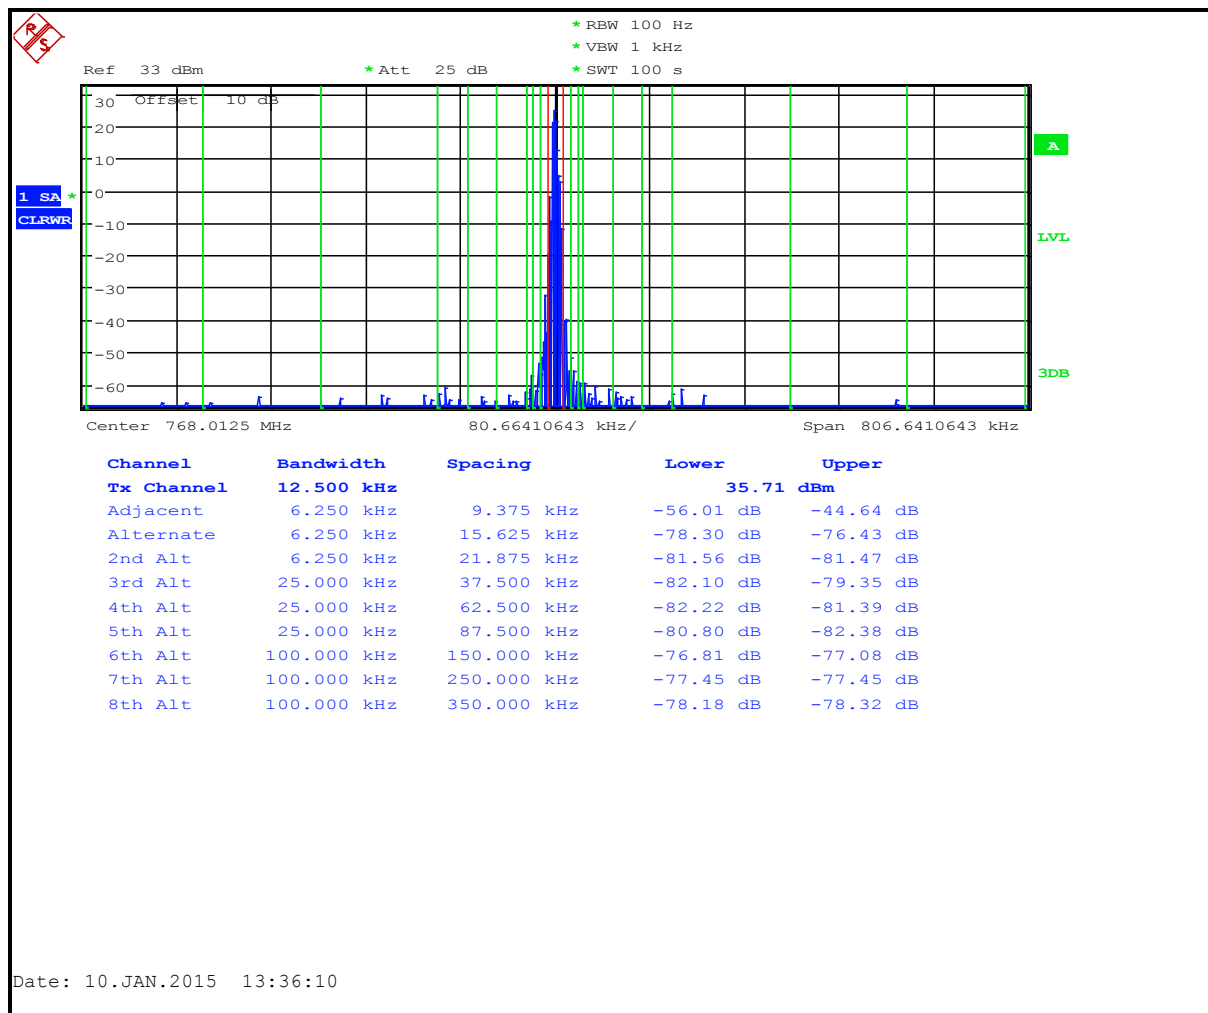


Table 6-51: Adjacent Channel Power – 768.0125 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-87.3
12 MHz to receive band	30(s)	-75	-108.6
In receive band	30(s)	-100	-107.8

Plot 6-52: Adjacent Channel Power – 769.0125 MHz; P25 Phase 2; <400 kHz

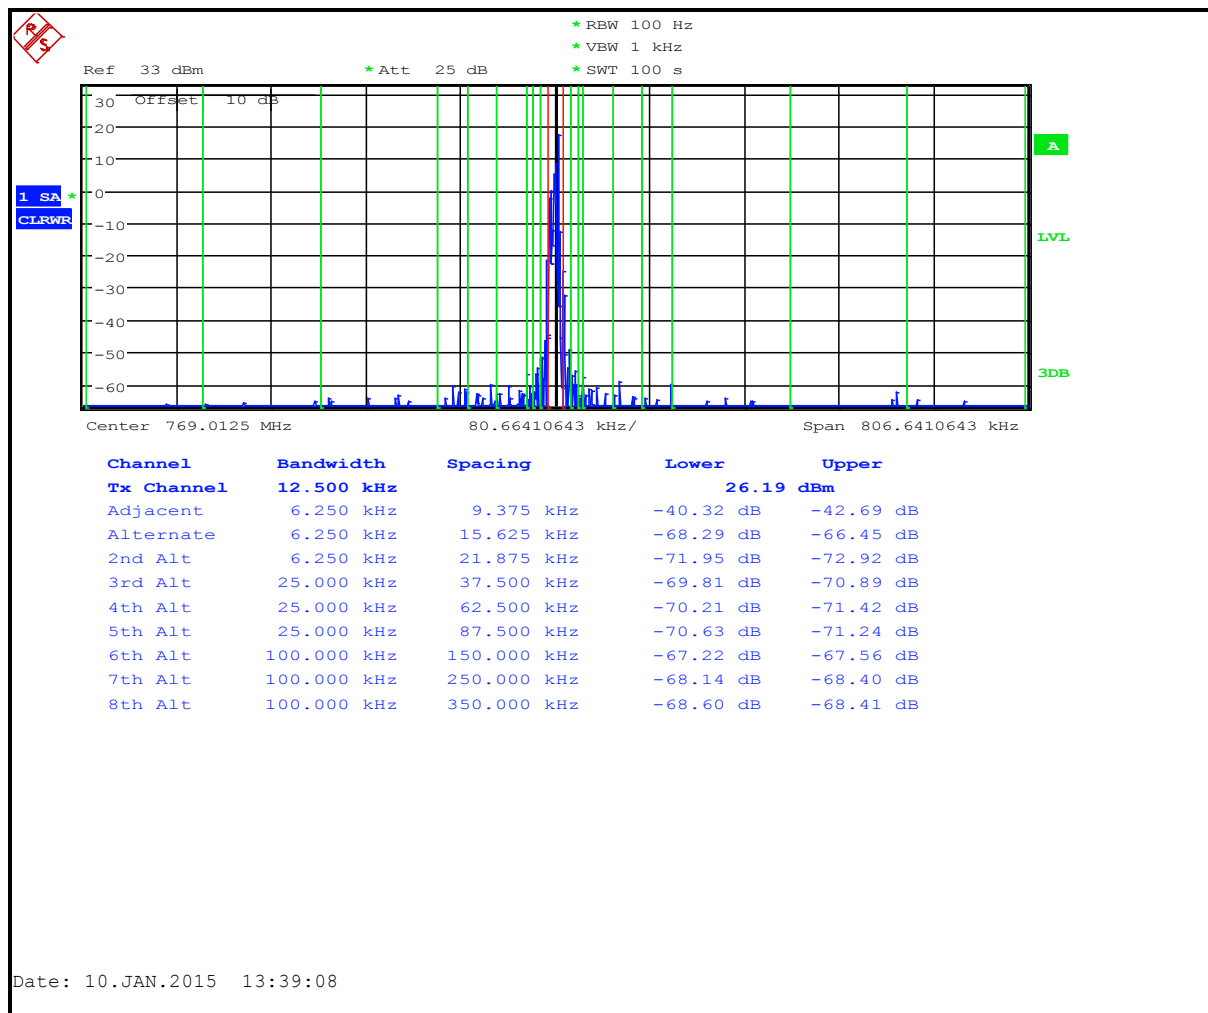


Table 6-52: Adjacent Channel Power – 769.0125 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.5
12 MHz to receive band	30(s)	-75	-105.1
In receive band	30(s)	-100	-108.7

Plot 6-53: Adjacent Channel Power – 771.0125 MHz; P25 Phase 2; <400 kHz

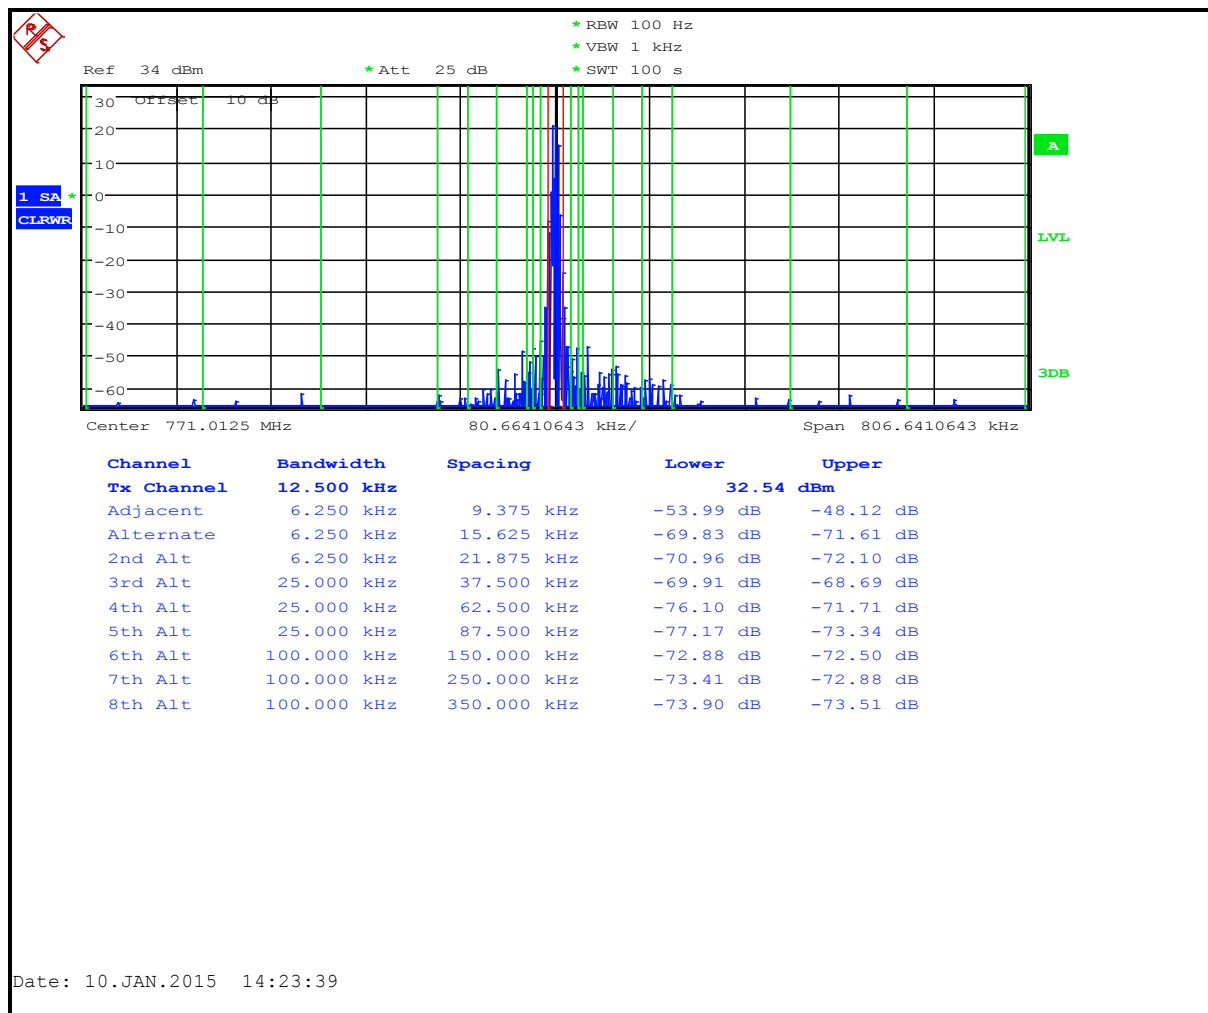


Table 6-53: Adjacent Channel Power – 771.0125 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.1
12 MHz to receive band	30(s)	-75	-106.1
In receive band	30(s)	-100	-107.2

Plot 6-54: Adjacent Channel Power – 775.0125 MHz; P25 Phase 2; <400 kHz

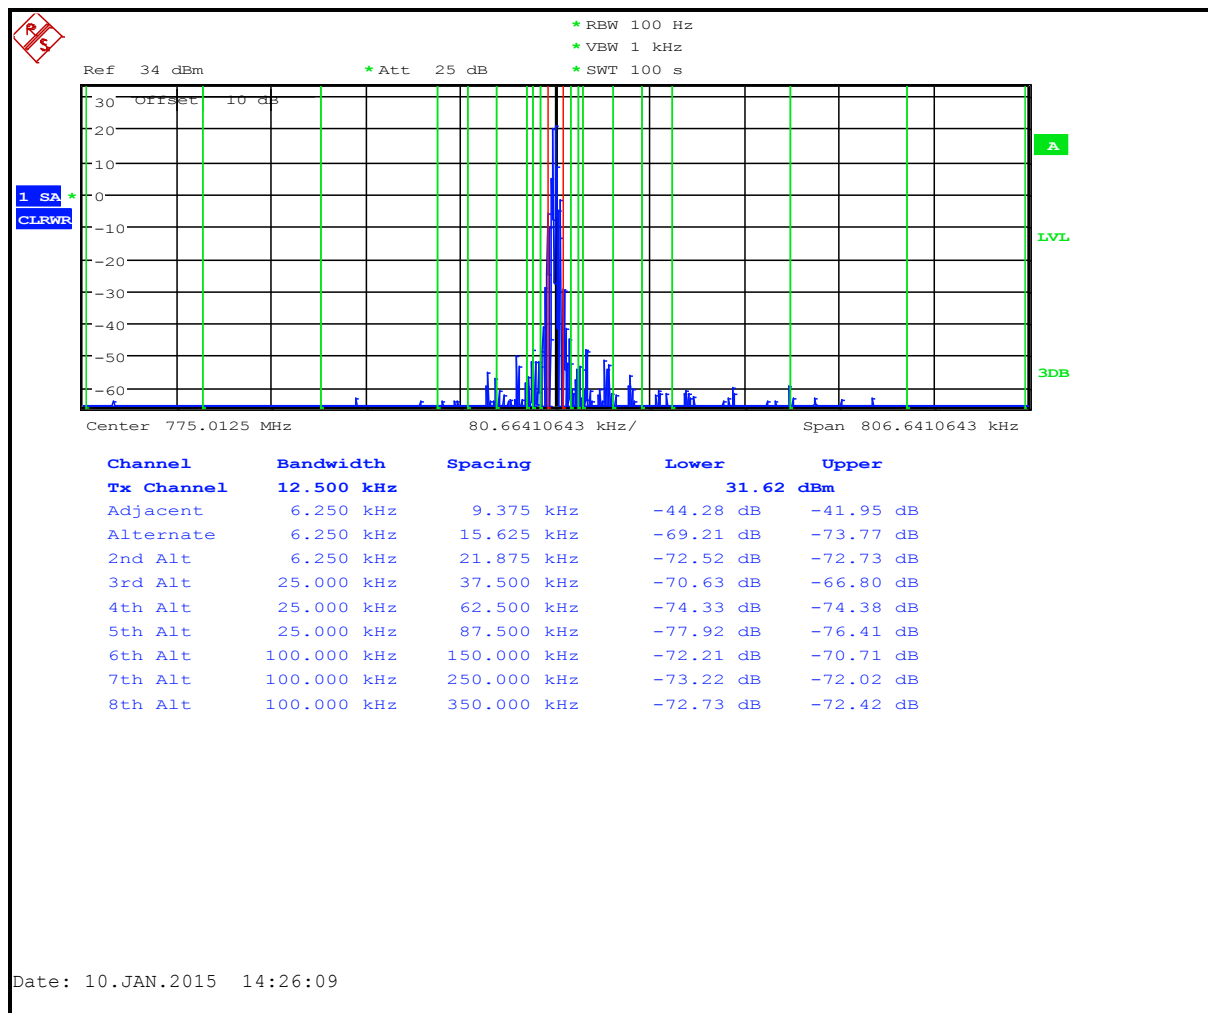


Table 6-54: Adjacent Channel Power – 775.0125 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.5
12 MHz to receive band	30(s)	-75	-101.9
In receive band	30(s)	-100	-105.4

Plot 6-55: Adjacent Channel Power – 775.9875 MHz; P25 Phase 2; <400 kHz

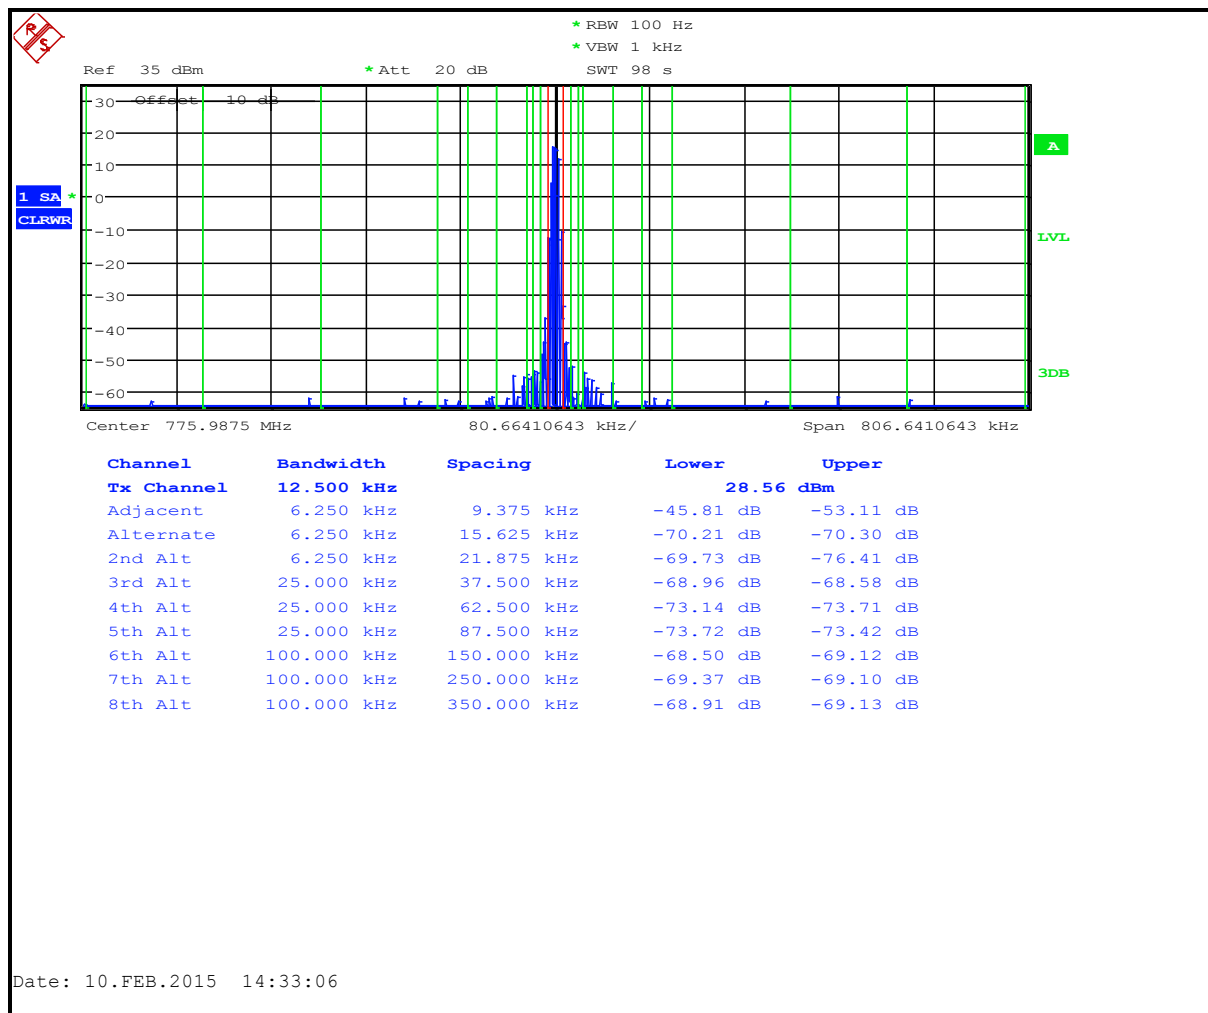


Table 6-55: Adjacent Channel Power – 775.9875 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.6
12 MHz to receive band	30(s)	-75	-100.1
In receive band	30(s)	-100	-105.2

Plot 6-56: Adjacent Channel Power – 798.0125 MHz; P25 Phase 2; <400 kHz

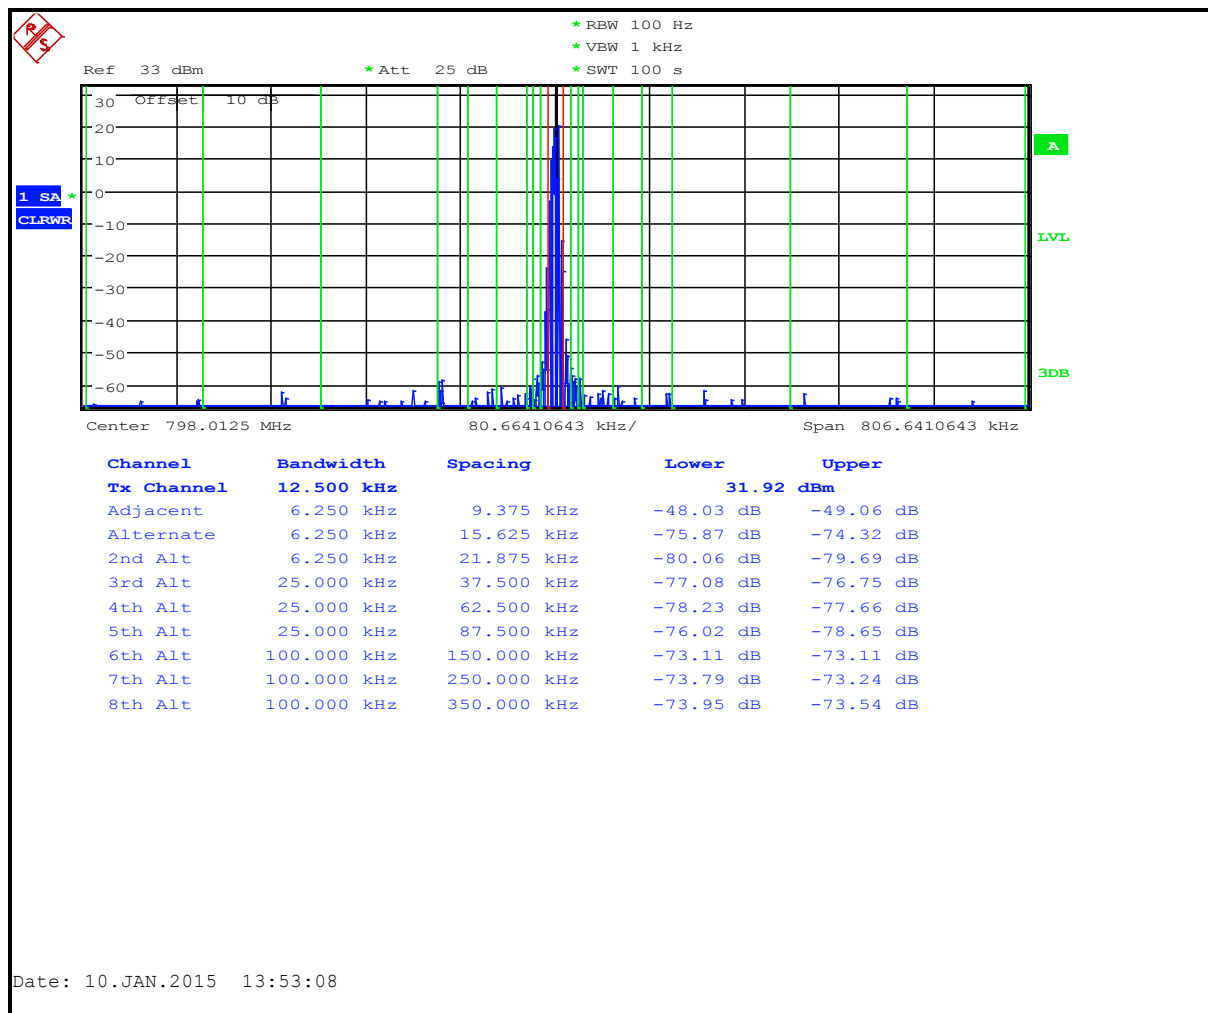


Table 6-56: Adjacent Channel Power – 798.0125 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-80.6
12 MHz to receive band	30(s)	-75	-101.4
In receive band	30(s)	-100	-101.7

Plot 6-57: Adjacent Channel Power – 799.0125 MHz; P25 Phase 2; <400 kHz

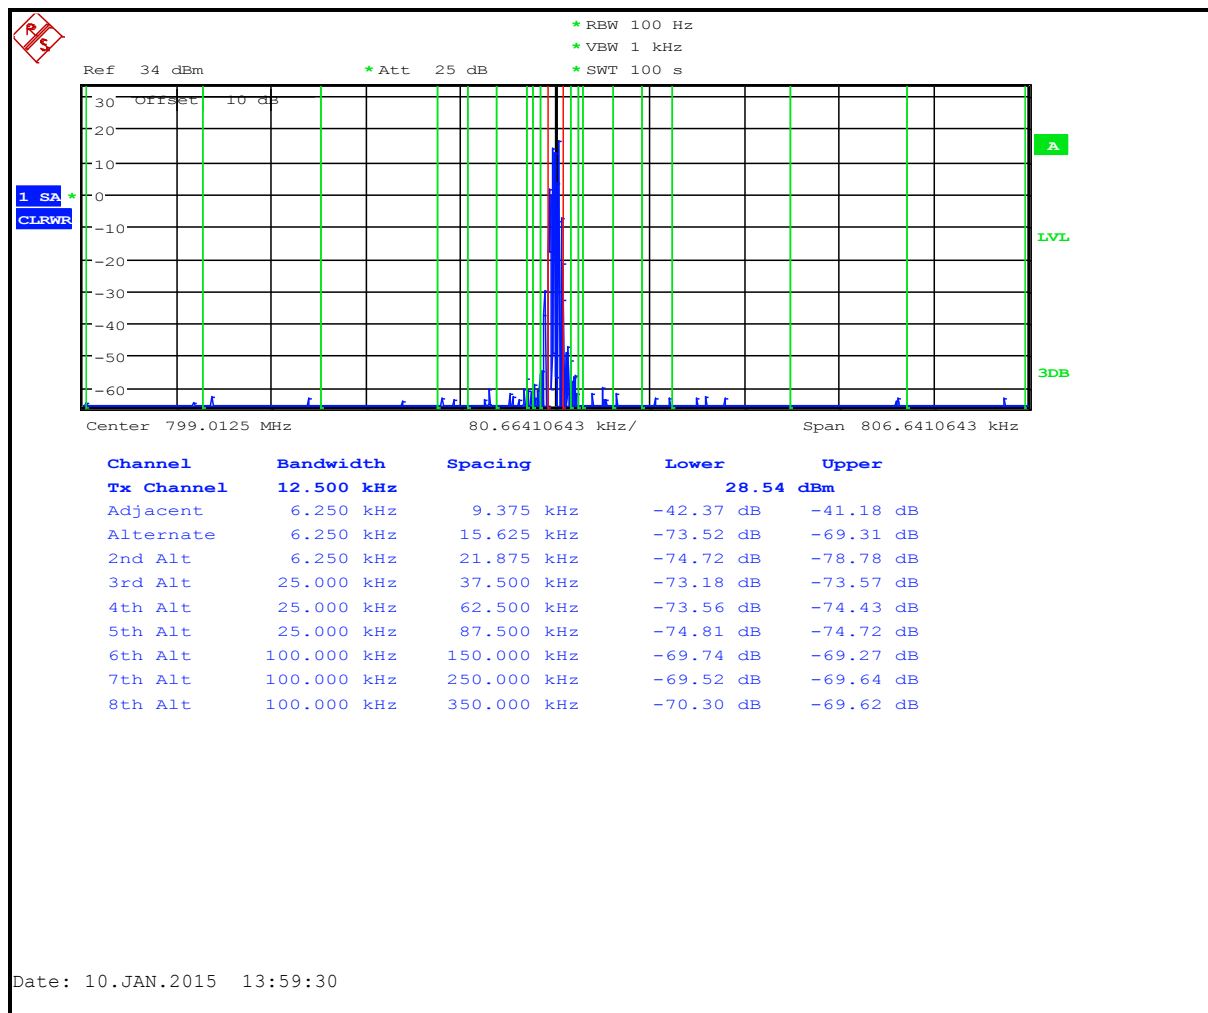


Table 6-57: Adjacent Channel Power – 799.0125 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.4
12 MHz to receive band	30(s)	-75	-99.1
In receive band	30(s)	-100	-103.0

Plot 6-58: Adjacent Channel Power – 801.0125 MHz; P25 Phase 2; <400 kHz

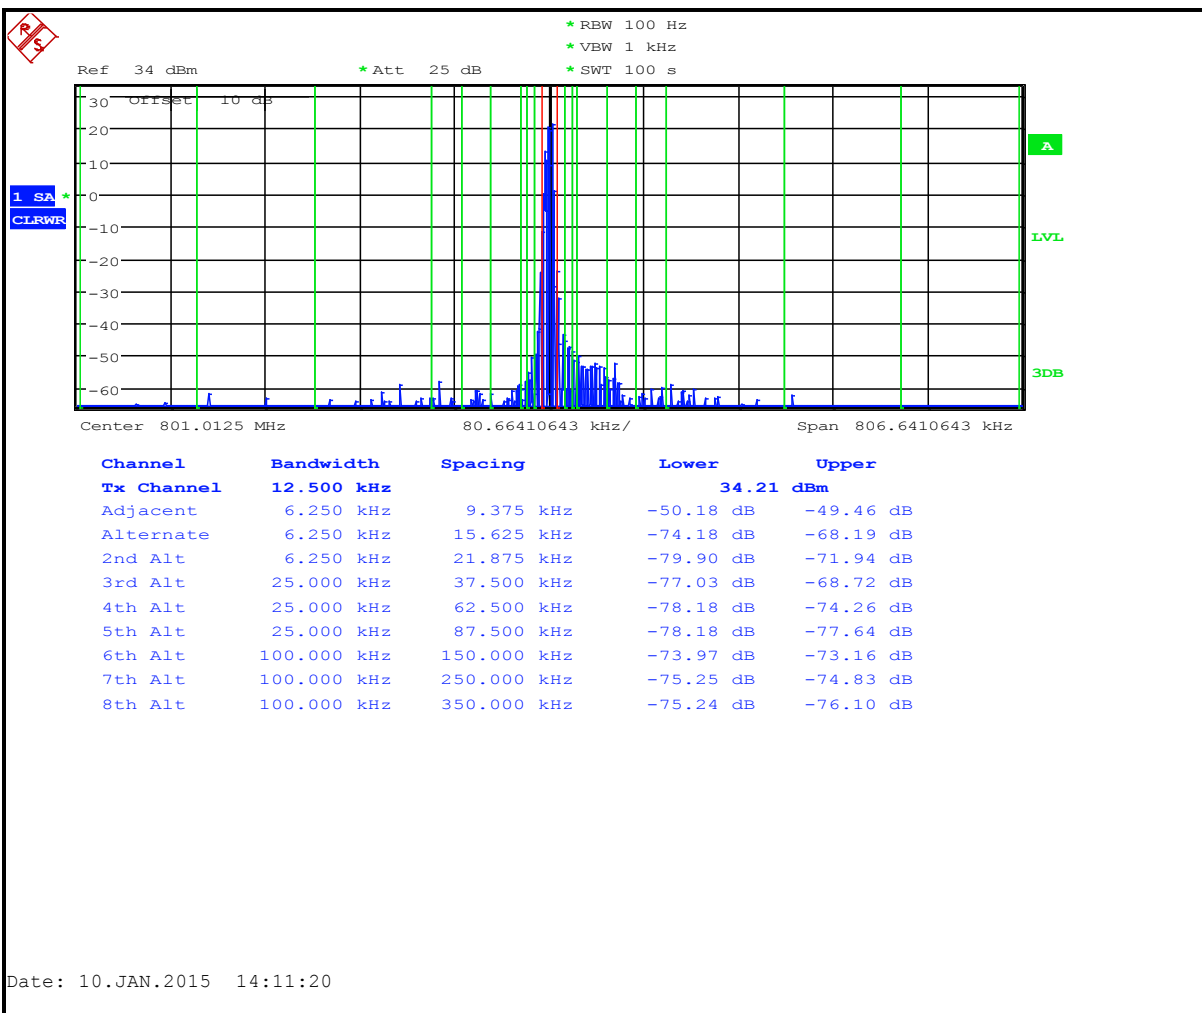


Table 6-58: Adjacent Channel Power – 801.0125 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-83.1
12 MHz to receive band	30(s)	-75	-100.4
In receive band	30(s)	-100	-106.0

Plot 6-59: Adjacent Channel Power – 805.0125 MHz; P25 Phase 2; <400 kHz

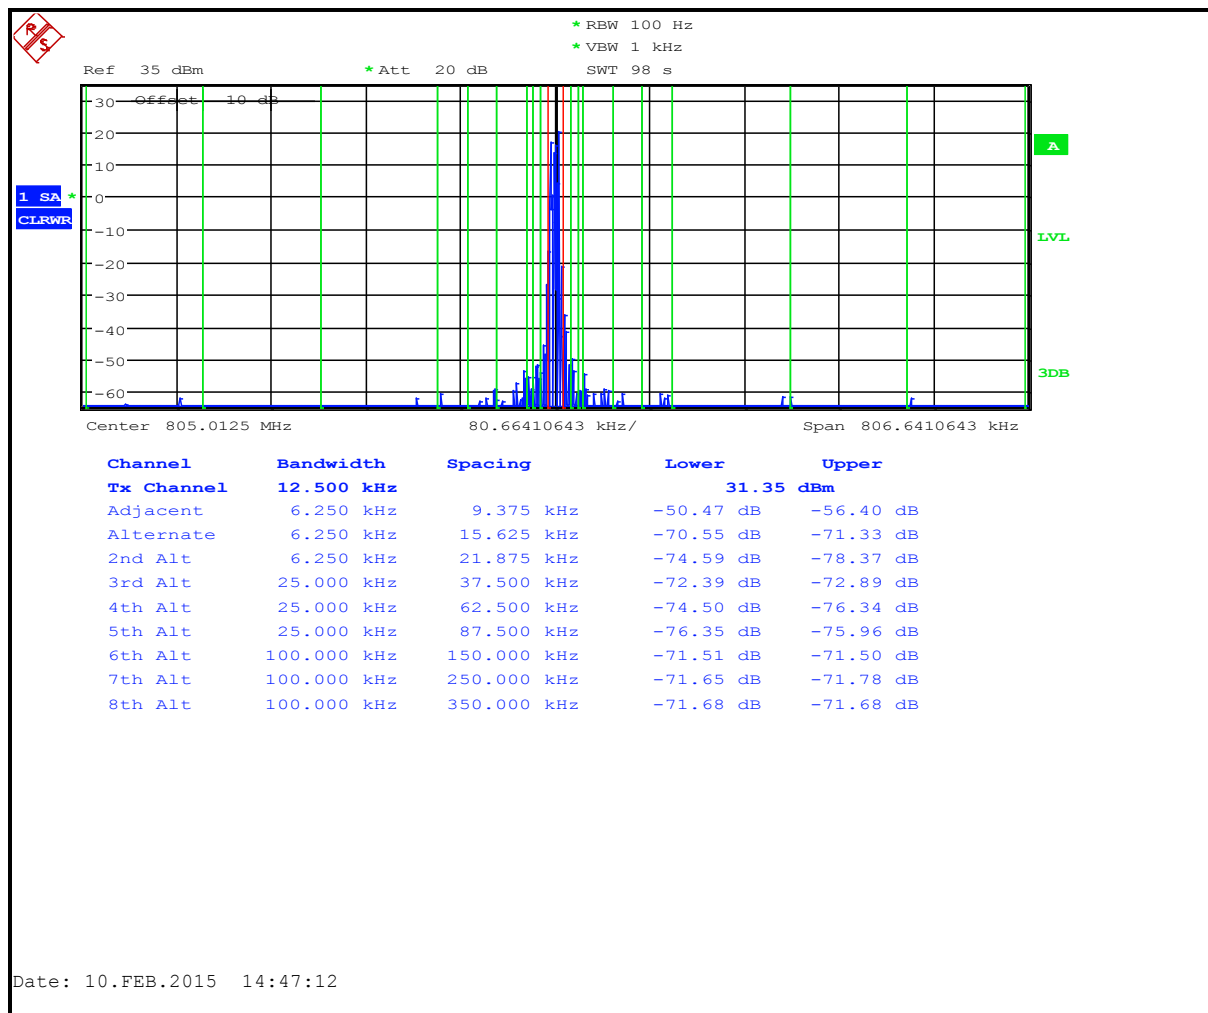


Table 6-59: Adjacent Channel Power – 805.0125 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.7
12 MHz to receive band	30(s)	-75	-96.2
In receive band	30(s)	-100	-107.7

Plot 6-60: Adjacent Channel Power – 805.9875 MHz; P25 Phase 2; <400 kHz

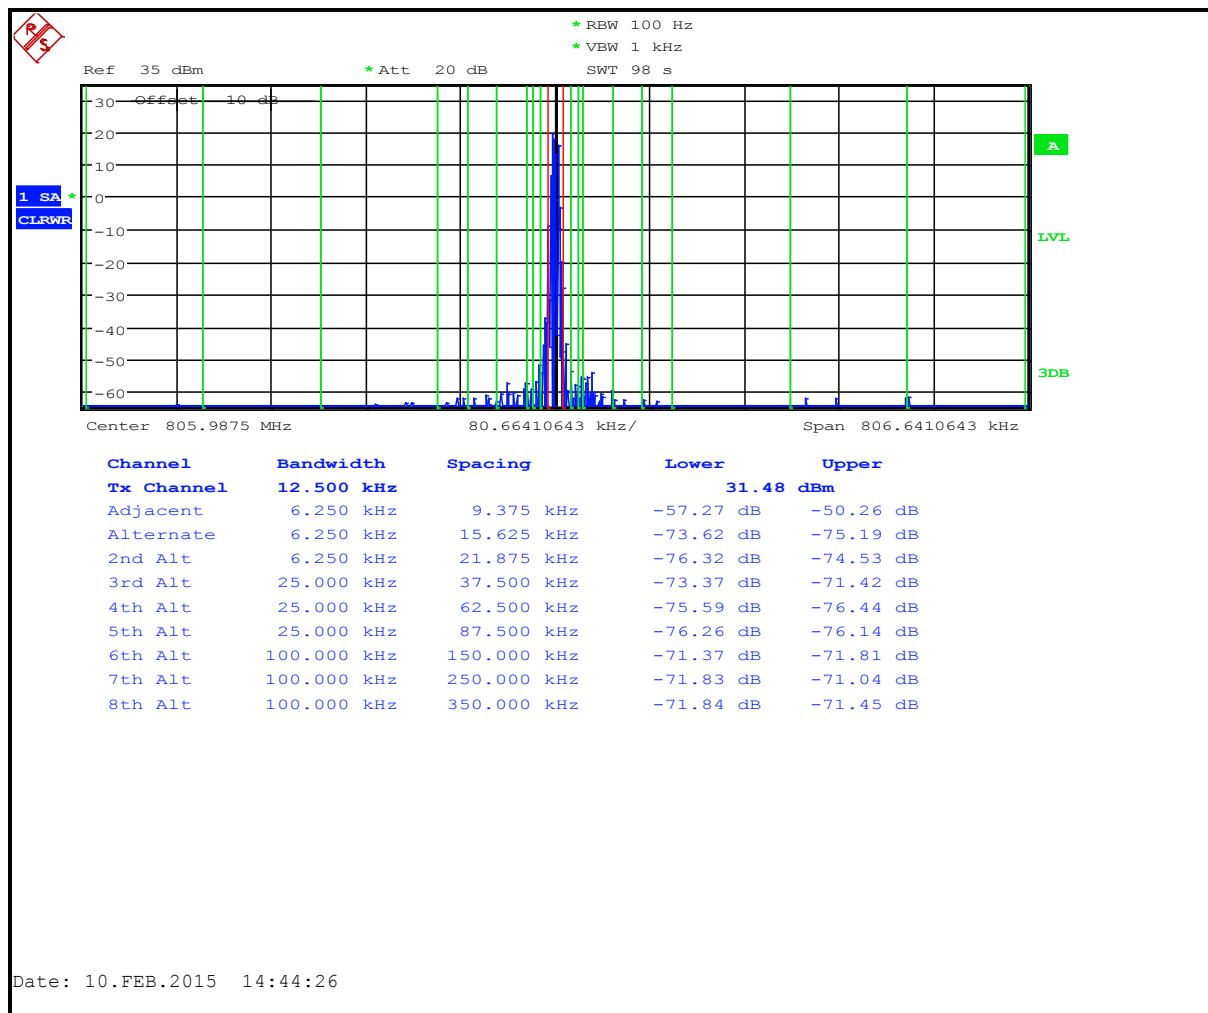


Table 6-60: Adjacent Channel Power – 805.9875 MHz; P25 Phase 2; 400 kHz – RX band

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.0
12 MHz to receive band	30(s)	-75	-94.8
In receive band	30(s)	-100	-105.2

Table 6-61: Test Equipment Used For Testing ACP Requirements

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	6/16/15
900819	Weinschel Corporation	2	10 dB Attenuator; 5 W	BF0830	7/1/15
901139	Weinschel Corporation	48-20-34 DC-18GHz	Attenuator, 100W 20dB	BK5859	3/25/16

Test Personnel:

Daniel Baltzell EMC Test Engineer	 Signature	January 9-10 & February 10, 2015 Dates of Tests
--------------------------------------	---	--

7 FCC Rules and Regulations Part 90.210(g) and Part 2.1053(a): Field Strength of Spurious Radiation; Part 90.543(f): Out of Band Emissions Limit

7.1 Test Procedure

TIA-603-D 2010, section 2.2.12

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25 and EDACS modes.

The spurious emissions levels were measured, and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna (dBi) was added to achieve the EIRP level, then converted from the corrected signal generator level (dBm) to dBW for the GNSS band and compared to the limit.

For emissions in the 1559-1610 band, Part 15.543(f) states: "For operations in the 763–775 MHz and 793–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation."

7.2 Test Data

7.2.1 CFR 47 Part 90.210 Requirements

The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

The following emissions were found to be within a 20 dB margin of the limit. All other emissions are not listed.

Table 7-1: Field Strength of Spurious Radiation - 378.0125 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
756.025	41.5	-31.4	0.2	0.9	68.3	-10.8

Table 7-2: Field Strength of Spurious Radiation - 406.1000 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
812.2	38.2	-35.9	0.3	0.6	73.1	-15.6
1218.3	43.2	-30.3	0.3	6.6	61.5	-4.0

Table 7-3: Field Strength of Spurious Radiation - 418.0125 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
836.025	47.3	-27.3	0.3	0.7	64.4	-6.9

Table 7-4: Field Strength of Spurious Radiation - 430.0125 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
860.025	42.1	-32.4	0.3	0.0	70.1	-12.6

Table 7-5: Field Strength of Spurious Radiation - 450.0125 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
900.025	45.4	-28.7	0.3	0.7	65.8	-8.3

Table 7-6: Field Strength of Spurious Radiation - 454.0125 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
908.025	43.9	-30.0	0.3	0.9	66.9	-9.4

Table 7-7: Field Strength of Spurious Radiation - 456.0125 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
912.025	45.4	-28.6	0.3	0.9	65.5	-8.0

Table 7-8: Field Strength of Spurious Radiation - 459.0250 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
918.05	42.8	-31.3	0.3	1.0	68.1	-10.6

Table 7-9: Field Strength of Spurious Radiation - 459.9750 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
919.95	44.5	-29.6	0.3	1.0	66.4	-8.9

Table 7-10: Field Strength of Spurious Radiation - 470.0125 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
940.025	43.0	-30.8	0.3	1.1	67.5	-10.0

Table 7-11: Field Strength of Spurious Radiation – 806.0125 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Substitution Measurement (dBm)	Substitution Cable Loss (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBd)	Margin (dB)
2418.038	41.7	-34.7	0.5	9.5	69.6	-14.7

Table 7-12: Field Strength of Spurious Radiation – 815 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Substitution Measurement (dBm)	Substitution Cable Loss (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBd)	Margin (dB)
2445.000	31.6	-46.8	0.5	9.5	72.8	-17.8

Table 7-13: Field Strength of Spurious Radiation – 823.9875 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Substitution Measurement (dBm)	Substitution Cable Loss (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBd)	Margin (dB)
2471.963	34.6	-41.8	0.5	9.5	67.8	-12.8

Table 7-14: Field Strength of Spurious Radiation – 851.0125 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Substitution Measurement (dBm)	Substitution Cable Loss (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBd)	Margin (dB)
2553.038	31.0	-45.2	0.5	9.5	71.2	-16.2

Table 7-15: Field Strength of Spurious Radiation – 860 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Substitution Measurement (dBm)	Substitution Cable Loss (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBd)	Margin (dB)
2580.000	33.2	-45.3	0.5	9.6	71.1	-16.2

Table 7-16: Field Strength of Spurious Radiation – 868.9875 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Substitution Measurement (dBm)	Substitution Cable Loss (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBd)	Margin (dB)
2606.963	35.7	-42.3	0.5	9.6	68.1	-13.2

7.2.2 CFR 47 Part 90.543(f) Requirements

The worst-case emissions test data are shown.

Limit: -80 dBW EIRP for discrete emissions

Table 7-17: Field Strength of Spurious Radiation

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBW)	Margin (dB)
1536.025	25.6	-48.6	0.4	8.0	-71.0	-1.0
1538.025	22.8	-51.8	0.4	8.0	-74.2	-4.2
1542.025	23.5	-50.7	0.4	8.1	-73.0	-3.0
1596.025	23.1	-52.0	0.4	8.8	-73.6	-3.6
1598.025	26.1	-48.8	0.4	8.9	-70.3	-0.3
1602.025	22.0	-52.8	0.4	8.9	-74.3	-4.3

Table 7-18: Test Equipment Used for Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	9/10/16
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	OATS1	N/A
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	9/4/16
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	9/4/16
901594	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	9/4/16
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	N/A
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/16
901582	Rohde & Schwarz	1167.0000.02	Signal Generator	101903	11/14/16
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	6/11/17
900321	EMCO	3161-03	Horn Antennas (4 – 8 GHz)	9508-1020	4/9/18
900323	EMCO	3160-07	Horn Antennas (8.2 – 12 GHz)	9605-1054	4/9/18
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	4/9/18
901132	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	9/16/16
901133	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	9/16/16

Test Personnel:

Daniel Baltzell Test Engineer	 Signature	January 13-February 9, 2015, January 12, 2016 Dates of Tests
----------------------------------	---	--