

Appendix B-2.4G WIFI Test Result

Appendix B.1: AC Line Conducted Emissions

Test Data


Environmental Conditions

Temperature:	23.7 °C
Relative Humidity:	46 %
ATM Pressure:	100.1 kPa
Test Engineer:	Homelander Dai
Test Date:	2026-07-08
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

- Note 1: The maximum output power mode and channel was tested: 802.11g Low Channel 2412MHz.*
- Note 2: Choose the ANT1 for test.*


For ANT1
AC 120V/60Hz, Line:

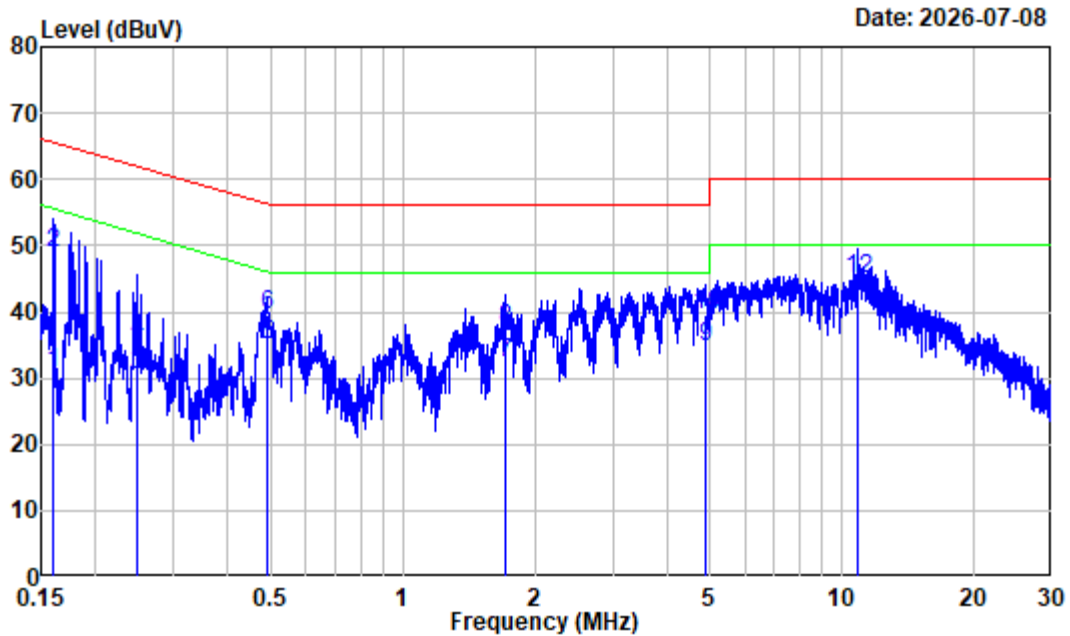

Site : Shielding Room
Condition : Line
Job No. : 2604T01718E-RF
Test Mode : 2.4G WIFI Transmitting
Tester : Homelander Dai
Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.160	19.71	11.07	30.78	55.44	-24.66	Average
2	0.160	19.71	29.09	48.80	65.44	-16.64	QP
3	0.248	19.43	11.00	30.43	51.83	-21.40	Average
4	0.248	19.43	16.34	35.77	61.83	-26.06	QP
5	0.492	19.52	15.58	35.10	46.14	-11.04	Average
6	0.492	19.52	20.04	39.56	56.14	-16.58	QP
7	1.711	20.62	11.80	32.42	46.00	-13.58	Average
8	1.711	20.62	16.84	37.46	56.00	-18.54	QP
9	4.896	20.66	14.16	34.82	46.00	-11.18	Average
10	4.896	20.66	18.85	39.51	56.00	-16.49	QP
11	10.862	20.11	20.58	40.69	50.00	-9.31	Average
12	10.862	20.11	24.76	44.87	60.00	-15.13	QP

AC 120V/60Hz, Neutral:

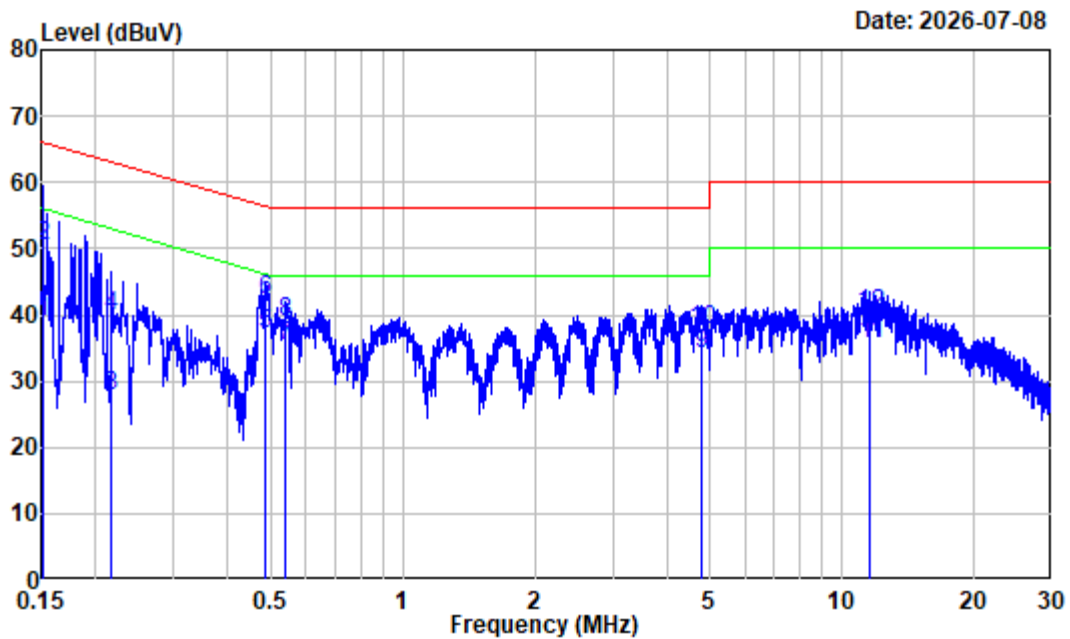

Site : Shielding Room
Condition : Neutral
Job No. : 2604T01718E-RF
Test Mode : 2.4G WIFI Transmitting
Tester : Homelander Dai
Receiver Setting: IF B/W 9kHz PK/AV

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.151	19.99	19.00	38.99	55.92	-16.93	Average
2	0.151	19.99	30.44	50.43	65.92	-15.49	QP
3	0.216	19.80	7.98	27.78	52.97	-25.19	Average
4	0.216	19.80	20.20	40.00	62.97	-22.97	QP
5	0.488	19.72	17.28	37.00	46.21	-9.21	Average
6	0.488	19.72	22.49	42.21	56.21	-14.00	QP
7	0.542	19.96	15.28	35.24	46.00	-10.76	Average
8	0.542	19.96	18.94	38.90	56.00	-17.10	QP
9	4.800	20.32	13.72	34.04	46.00	-11.96	Average
10	4.800	20.32	17.30	37.62	56.00	-18.38	QP
11	11.582	20.45	15.24	35.69	50.00	-14.31	Average
12	11.582	20.45	19.76	40.21	60.00	-19.79	QP

Appendix B.2: Radiated Spurious Emissions

Test Data

For Radiated Spurious Emissions, after pre-scan testing in the X, Y and Z axes of orientation, the worst case as setup photos was recorded.

9kHz-1GHz


Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	100.1 kPa
Test Engineer:	Jayden Luo
Test Date:	2026-07-15
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.


- Note 1: The Loop Antenna were tested in parallel, perpendicular, and ground-parallel. The worst orientation was perpendicular and the data was recorded in report.*
- Note 2: The maximum output power mode and channel was tested: 802.11g Low Channel 2412MHz.*
- Note 3: Choose the ANT1 for test.*
- Note 4: Choose the DC power for test.*

For ANT1
9kHz~30MHz:

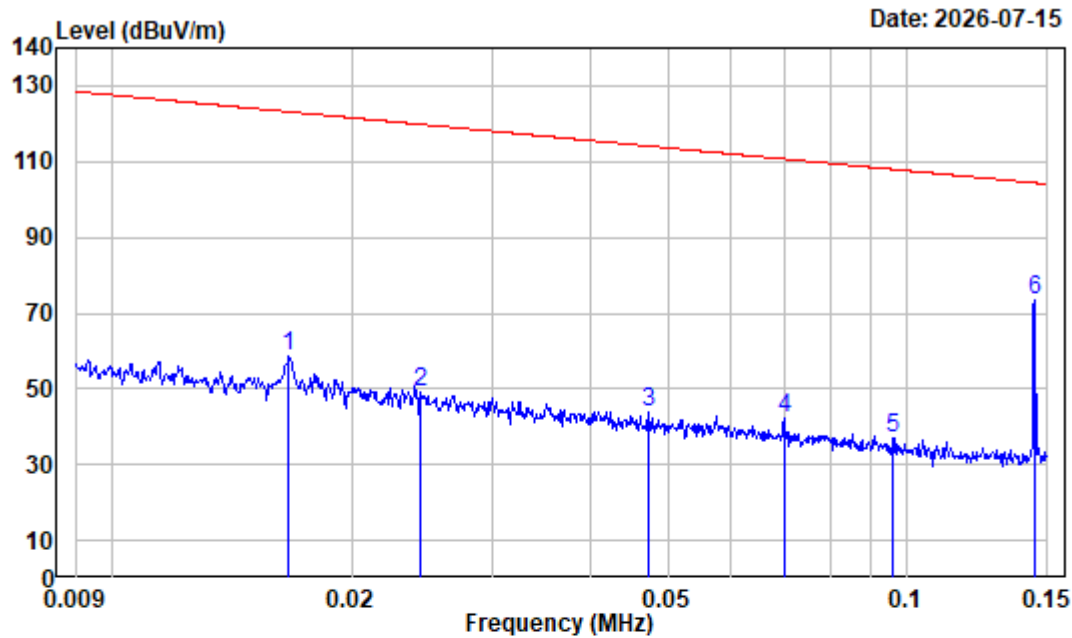

Site : chamber
Condition : 3m
Job No. : 2604T01718E-RF
Polarization : Perpendicular Tester: Jayden Luo
Test Mode : 2.4G WIFI Transmitting
Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.017	32.87	25.55	58.42	123.17	-64.75	Peak
2	0.024	29.42	19.52	48.94	119.84	-70.90	Peak
3	0.047	23.39	20.55	43.94	114.13	-70.19	Peak
4	0.070	19.96	22.36	42.32	110.70	-68.38	Peak
5	0.096	16.87	20.05	36.92	107.97	-71.05	Peak
6	0.145	14.42	58.78	73.20	104.40	-31.20	Peak

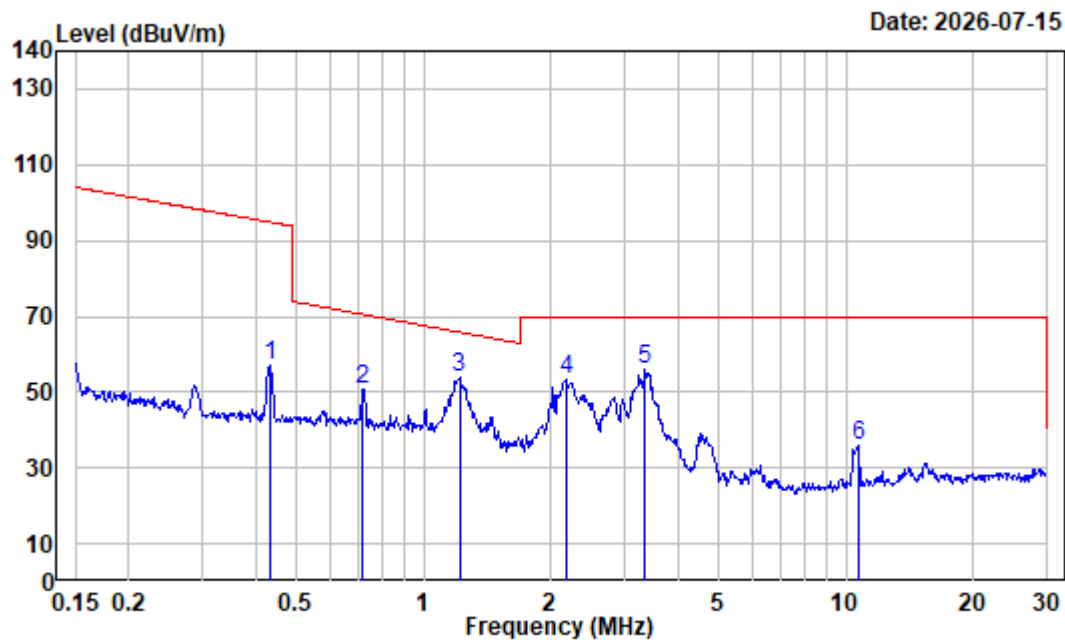

Site : chamber
Condition : 3m
Job No. : 2604T01718E-RF
Polarization : Perpendicular Tester: Jayden Luo
Test Mode : 2.4G WIFI Transmitting
Receiver Setting: RBW:10kHz VBW:30kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.433	4.63	52.38	57.01	94.88	-37.87	Peak
2	0.720	0.68	50.29	50.97	70.39	-19.42	Peak
3	1.216	-2.60	56.62	54.02	65.74	-11.72	Peak
4	2.178	-5.46	58.70	53.24	69.54	-16.30	Peak
5	3.346	-5.99	61.85	55.86	69.54	-13.68	Peak
6	10.676	-5.18	40.91	35.73	69.54	-33.81	Peak

30MHz~1GHz:

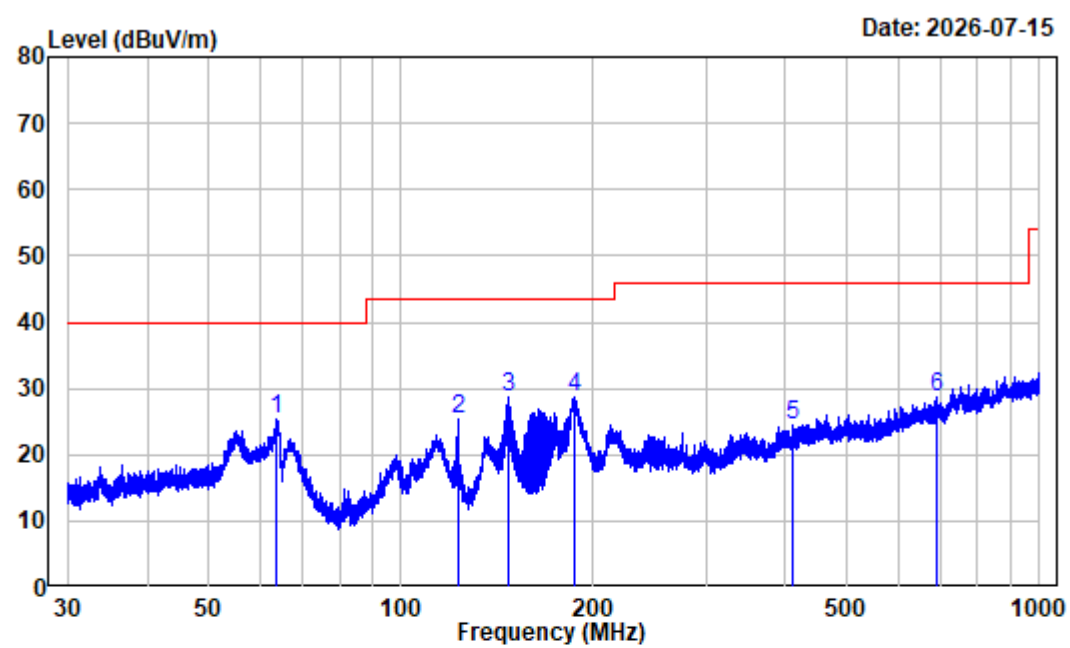

Site : chamber
Condition : 3m HORIZONTAL
Job No. : 2604T01718E-RF Tester: Jayden Luo
Test Mode : 2.4G WIFI Transmitting
Receiver Setting: RBW:100kHz VBW:300kHz


Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	63.815 -12.00	37.36	25.36	40.00	-14.64	Peak
2	122.619 -13.84	39.08	25.24	43.50	-18.26	Peak
3	147.468 -14.79	43.37	28.58	43.50	-14.92	Peak
4	186.523 -11.25	40.02	28.77	43.50	-14.73	Peak
5	411.644 -5.49	29.85	24.36	46.00	-21.64	Peak
6	692.594 -1.08	29.66	28.58	46.00	-17.42	Peak

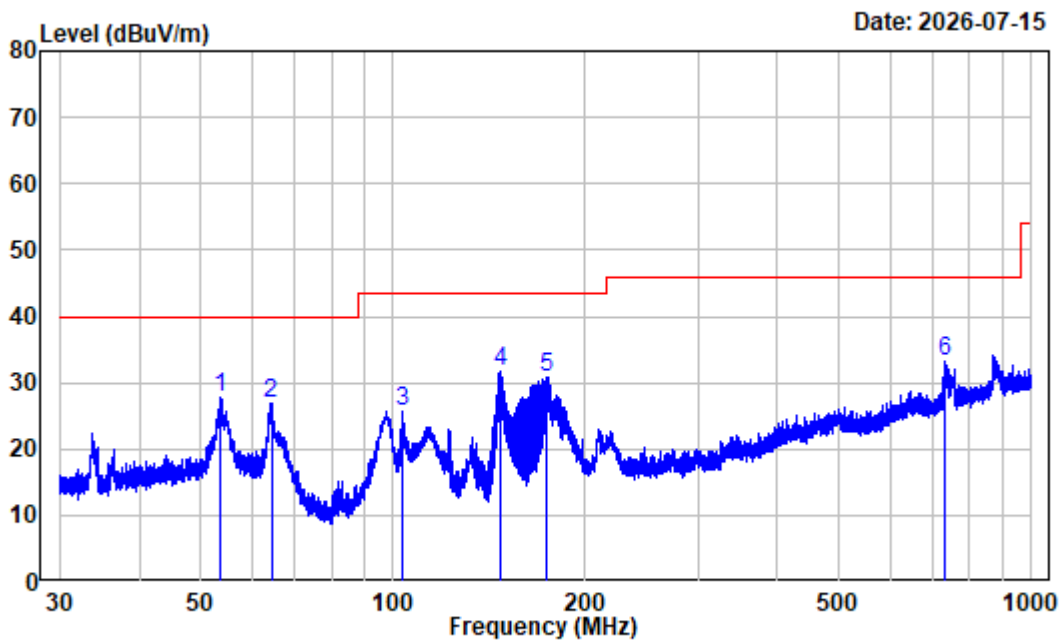

Site : chamber
Condition : 3m VERTICAL
Job No. : 2604T01718E-RF Tester: Jayden Luo
Test Mode : 2.4G WIFI Transmitting
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	53.740	-10.40	38.29	27.89	40.00	-12.11	Peak
2	64.405	-12.20	39.06	26.86	40.00	-13.14	Peak
3	103.306	-11.19	36.80	25.61	43.50	-17.89	Peak
4	147.468	-14.79	46.35	31.56	43.50	-11.94	Peak
5	173.814	-13.34	44.24	30.90	43.50	-12.60	Peak
6	733.526	-0.40	33.54	33.14	46.00	-12.86	Peak

For Simultaneous Transmission: 802.11g ANT1 Low Channel + AWS Band Downlink 2132.5MHz
9kHz~30MHz:

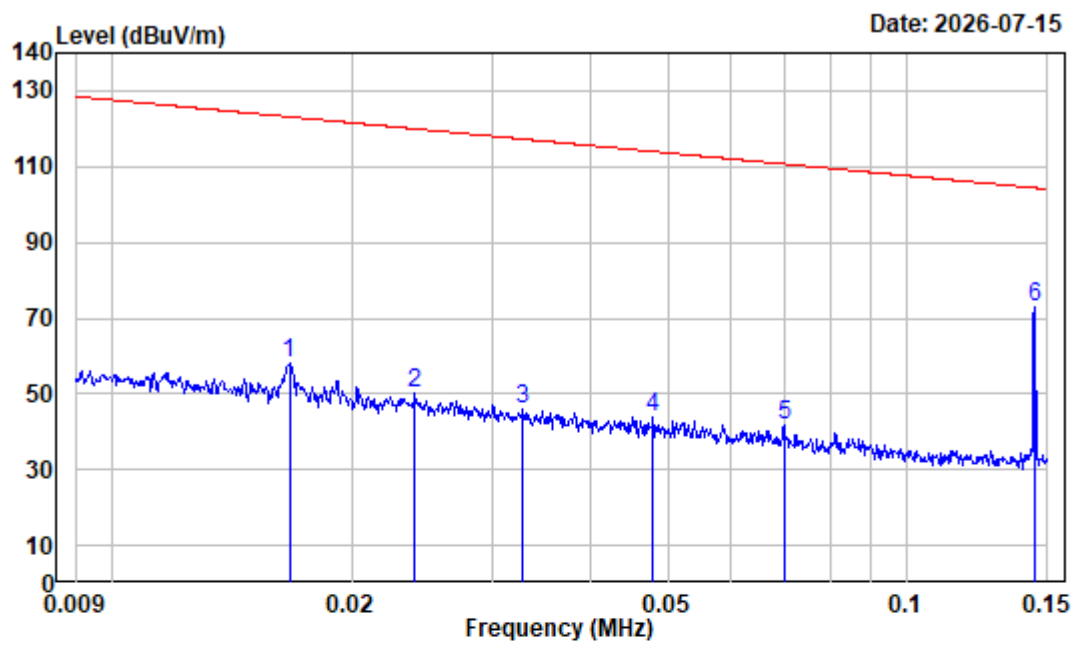

Site : chamber

Condition : 3m


Job No. : 2604T01718E-RF

Polarization : Perpendicular Tester: Jayden Luo

Test Mode : 2.4G WIFI Transmitting

Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	0.017	32.85	25.42	58.27	123.14	-64.87 Peak
2	0.024	29.60	20.37	49.97	119.99	-70.02 Peak
3	0.033	26.36	19.78	46.14	117.28	-71.14 Peak
4	0.048	23.25	20.60	43.85	114.00	-70.15 Peak
5	0.070	19.96	21.51	41.47	110.70	-69.23 Peak
6	0.145	14.42	58.38	72.80	104.40	-31.60 Peak

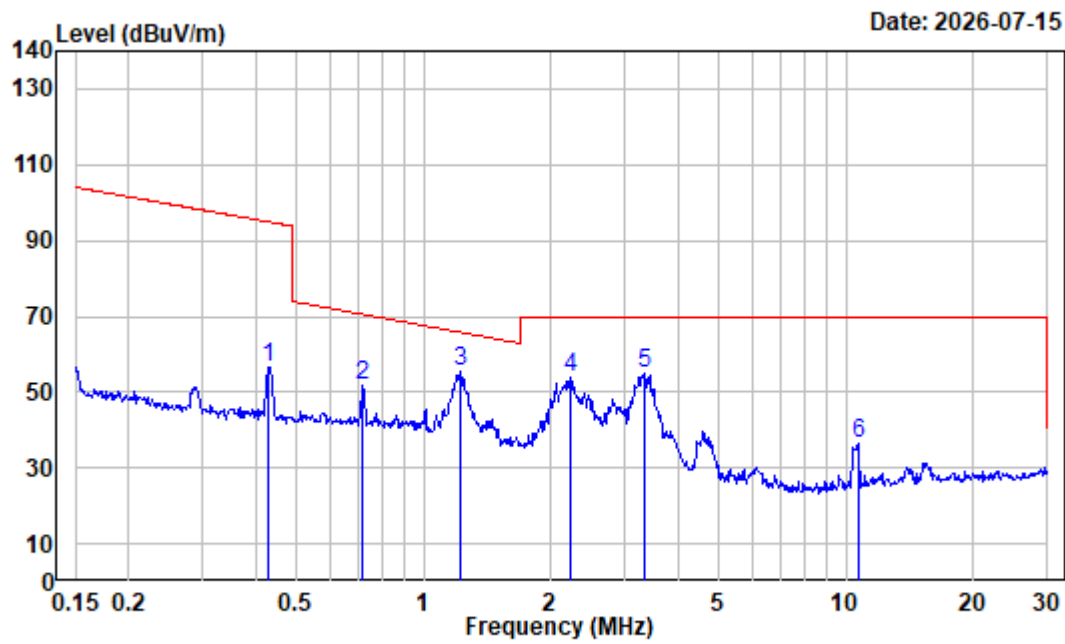

Site : chamber
Condition : 3m
Job No. : 2604T01718E-RF
Polarization : Perpendicular Tester: Jayden Luo
Test Mode : 2.4G WIFI Transmitting
Receiver Setting: RBW:10kHz VBW:30kHz


	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.431	4.68	52.07	56.75	94.92	-38.17	Peak
2	0.720	0.68	51.27	51.95	70.39	-18.44	Peak
3	1.223	-2.62	58.15	55.53	65.69	-10.16	Peak
4	2.225	-5.48	59.41	53.93	69.54	-15.61	Peak
5	3.346	-5.99	61.16	55.17	69.54	-14.37	Peak
6	10.676	-5.18	41.42	36.24	69.54	-33.30	Peak

30MHz~1GHz:

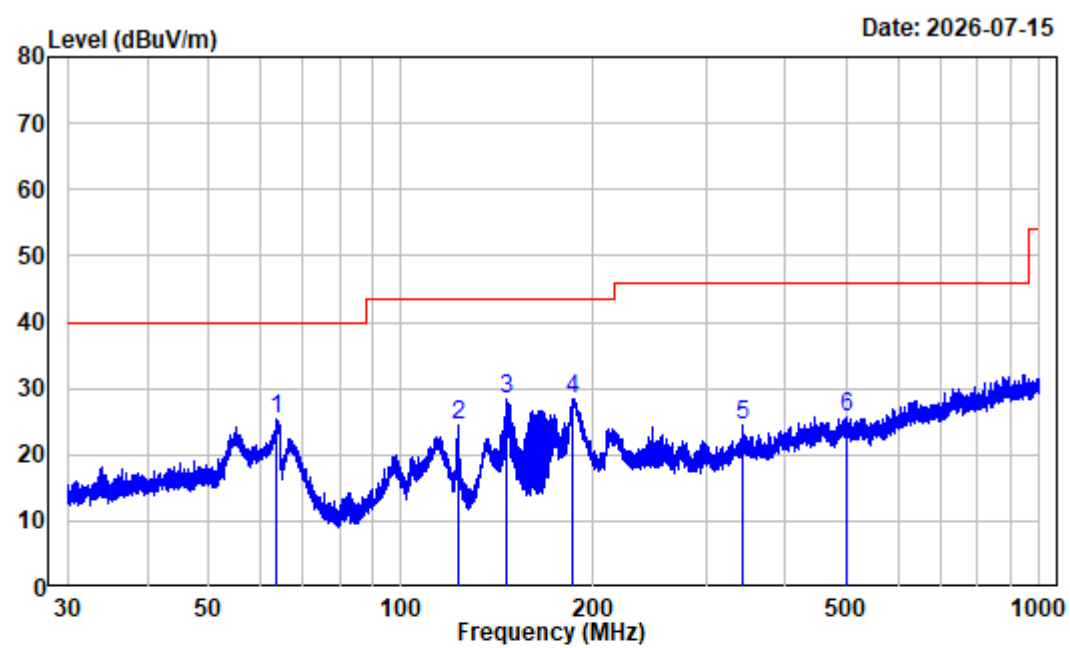

Site : chamber
Condition : 3m HORIZONTAL
Job No. : 2604T01718E-RF Tester: Jayden Luo
Test Mode : 2.4G WIFI Transmitting
Receiver Setting: RBW:100kHz VBW:300kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	63.843	-12.01	37.23	25.22	40.00	-14.78 Peak
2	122.619	-13.84	38.20	24.36	43.50	-19.14 Peak
3	146.438	-14.86	43.27	28.41	43.50	-15.09 Peak
4	185.951	-11.37	39.84	28.47	43.50	-15.03 Peak
5	343.782	-6.84	31.17	24.33	46.00	-21.67 Peak
6	497.895	-3.83	29.37	25.54	46.00	-20.46 Peak

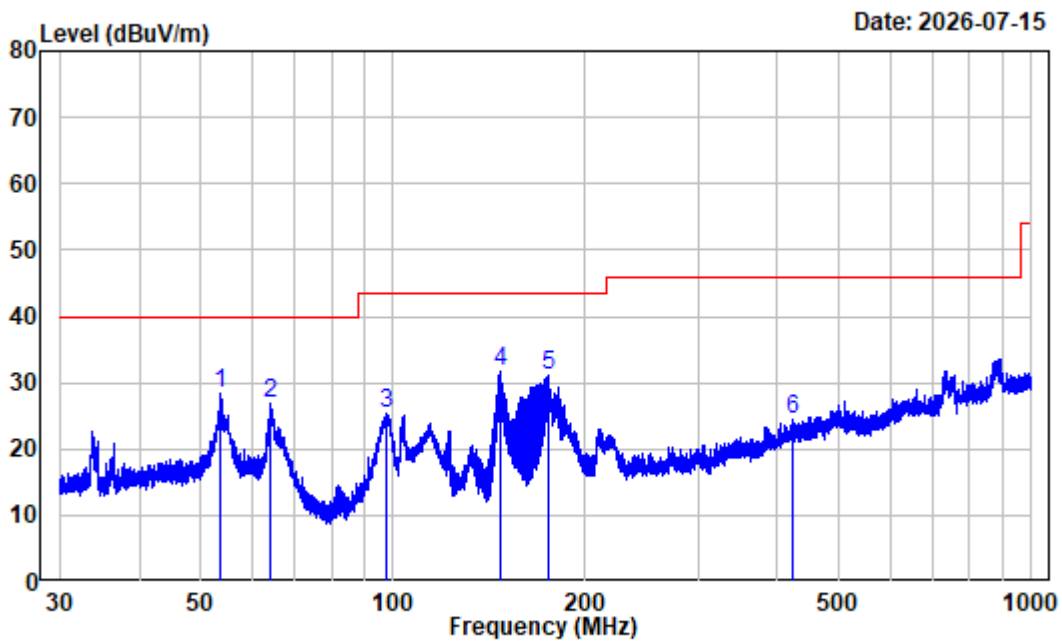

Site : chamber

Condition : 3m VERTICAL

Job No. : 2604T01718E-RF Tester: Jayden Luo

Test Mode : 2.4G WIFI Transmitting

Receiver Setting: RBW:100kHz VBW:300kHz

	Freq Factor		Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	53.764	-10.40	38.90	28.50	40.00	-11.50	Peak
2	64.292	-12.17	38.96	26.79	40.00	-13.21	Peak
3	97.243	-11.94	37.32	25.38	43.50	-18.12	Peak
4	147.017	-14.79	46.59	31.80	43.50	-11.70	Peak
5	175.421	-13.16	44.18	31.02	43.50	-12.48	Peak
6	423.912	-5.02	29.55	24.53	46.00	-21.47	Peak

1GHz-25GHz

Environmental Conditions


Temperature:	25.6 °C
Relative Humidity:	55 %
ATM Pressure:	100.1 kPa
Test Engineer:	Max Tao
Test Date:	2026-07-03
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

- Note 1: For ANT0/ANT1, 1GHz-18GHz, the fundamental with band reject filter.*
- Note 2: For Simultaneous Transmission, 1GHz-4GHz, the fundamental with band reject filter.*
- Note 3: For 18GHz-25GHz, the pre-scan maximum output power mode and channel was tested: 802.11g Low Channel 2412MHz.*
- Note 4: Choose the adapter for test.*

For ANT0


2.4G WIFI 802.11b Low Channel 1GHz-18GHz_HORIZONTAL

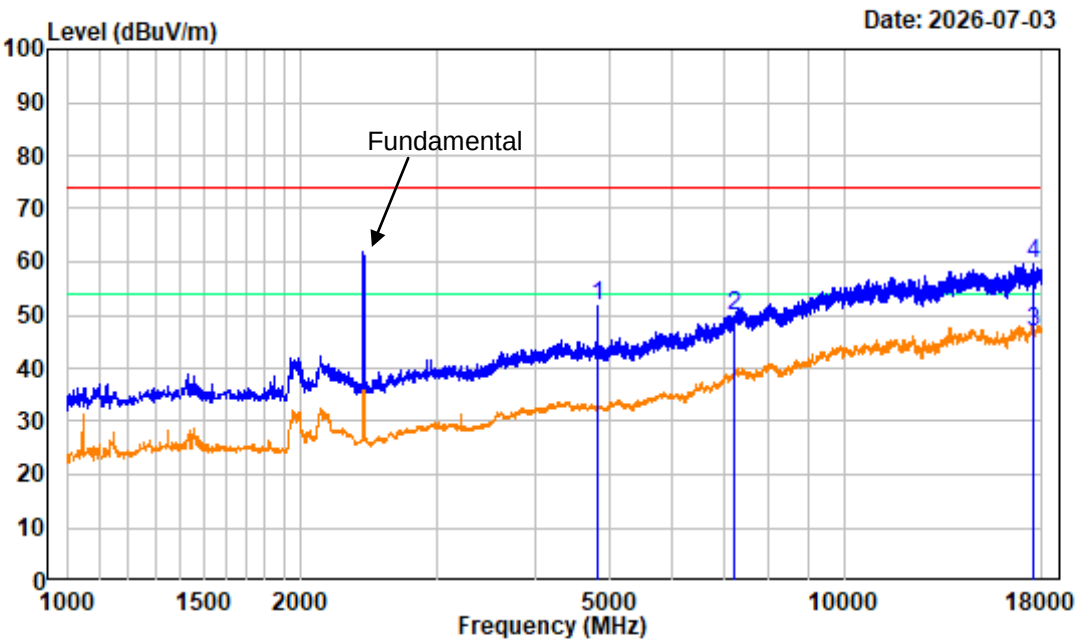

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Low Channel 2412MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	58.54	51.63	74.00	-22.37	Peak
2	7236.000	-1.57	51.28	49.71	74.00	-24.29	Peak
3	17570.750	7.08	39.73	46.81	54.00	-7.19	Average
4	17570.750	7.08	52.56	59.64	74.00	-14.36	Peak


2.4G WIFI 802.11b Low Channel 1GHz-18GHz_VERTICAL

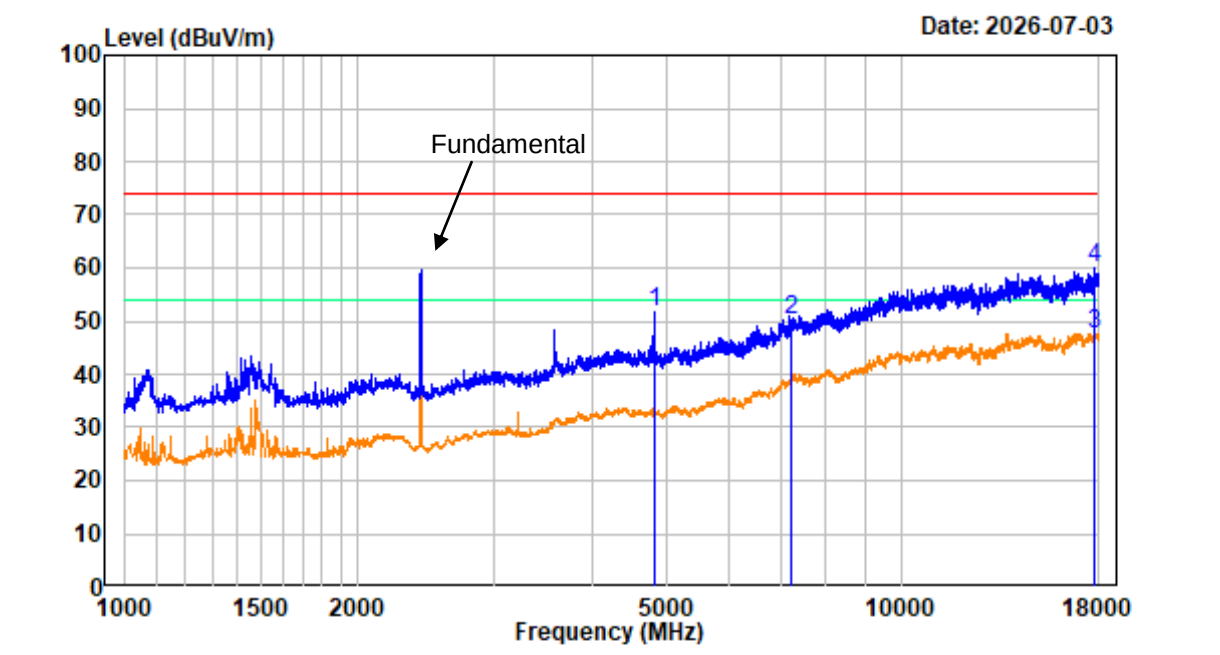

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Low Channel 2412MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	58.72	51.81	74.00	-22.19 Peak
2	7236.000	-1.57	51.78	50.21	74.00	-23.79 Peak
3	17783.250	7.25	40.34	47.59	54.00	-6.41 Average
4	17783.250	7.25	52.90	60.15	74.00	-13.85 Peak


2.4G WIFI 802.11b Low Channel Bandedge_HORIZONTAL

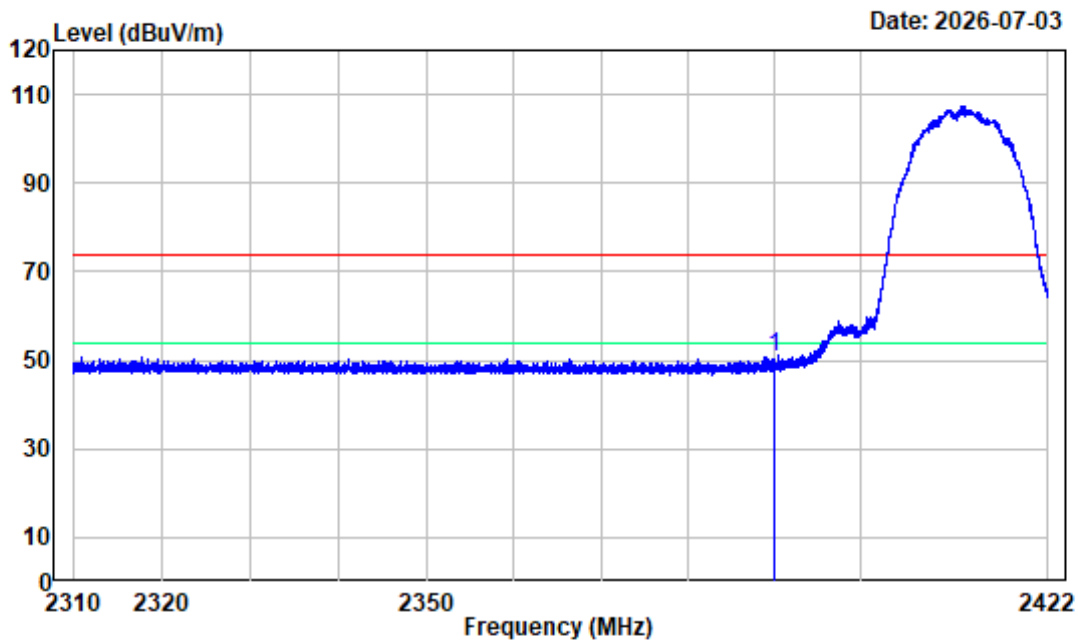

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.93	61.54	50.61	74.00	-23.39	Peak

2.4G WIFI 802.11b Low Channel Bandedge_VERTICAL

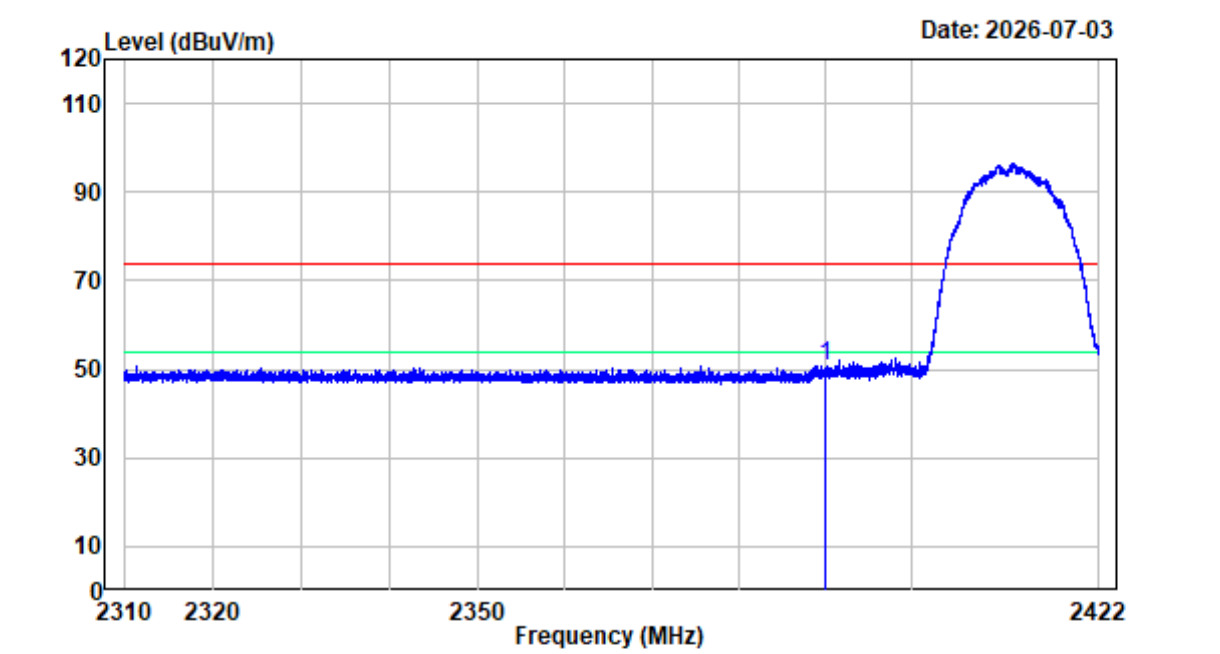

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11b Low Channel 2412MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	61.85	50.92	74.00	-23.08 Peak


2.4G WIFI 802.11b Middle Channel 1GHz-18GHz_HORIZONTAL

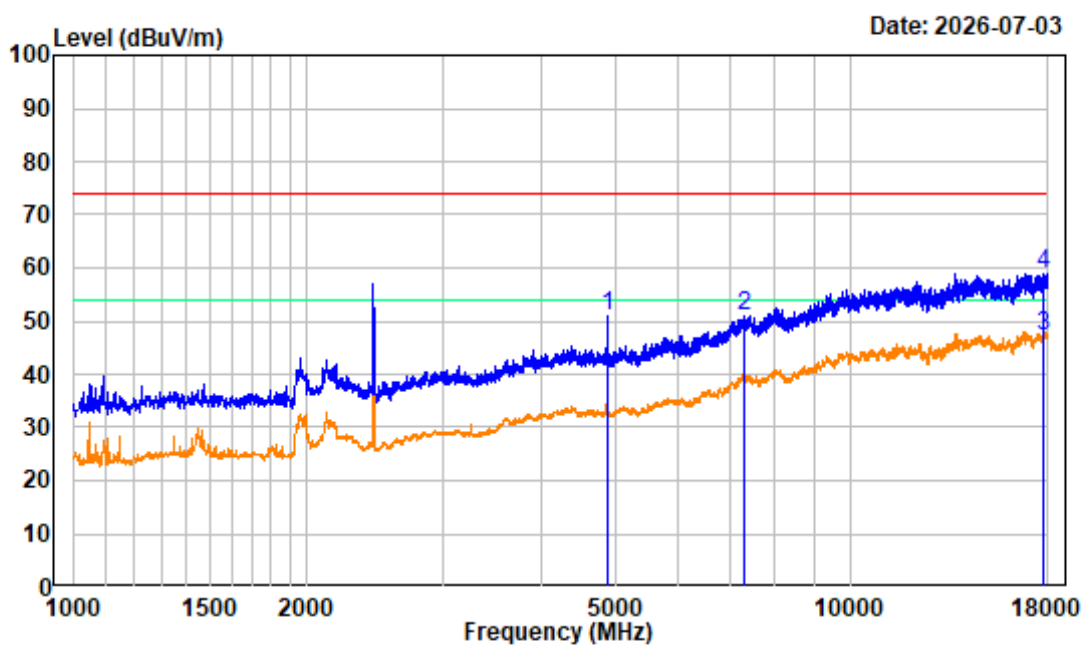

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	57.79	50.83	74.00	-23.17 Peak
2	7311.000	-1.24	52.01	50.77	74.00	-23.23 Peak
3	17728.000	7.13	39.95	47.08	54.00	-6.92 Average
4	17728.000	7.13	51.77	58.90	74.00	-15.10 Peak


2.4G WIFI 802.11b Middle Channel 1GHz-18GHz_VERTICAL

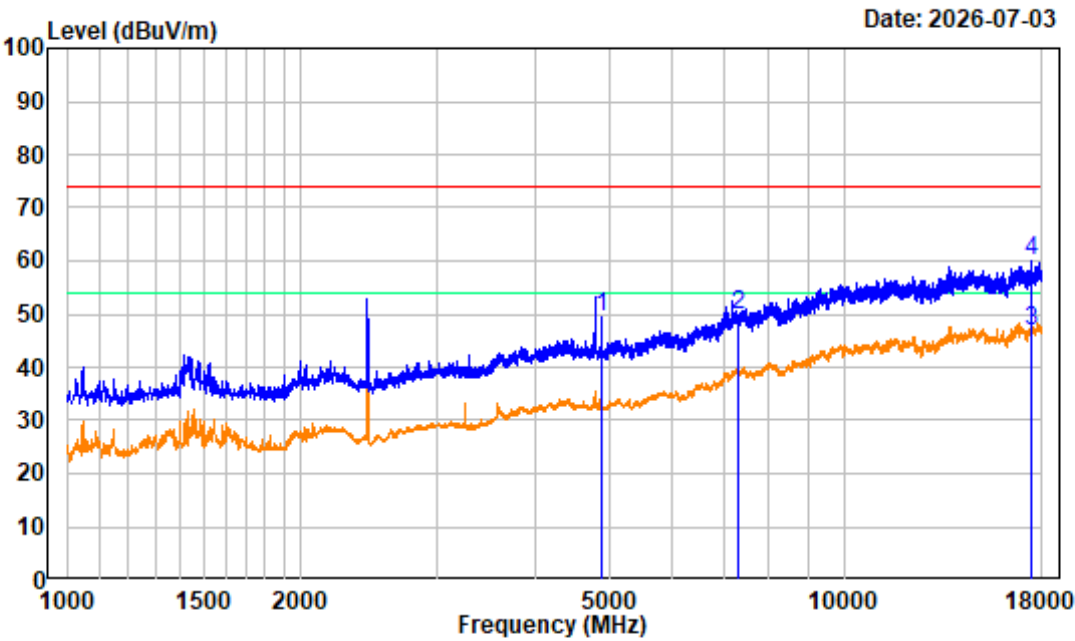

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	56.43	49.47	74.00	-24.53	Peak
2	7311.000	-1.24	51.02	49.78	74.00	-24.22	Peak
3	17443.250	7.24	39.73	46.97	54.00	-7.03	Average
4	17443.250	7.24	52.81	60.05	74.00	-13.95	Peak


2.4G WIFI 802.11b High Channel 1GHz-18GHz_HORIZONTAL

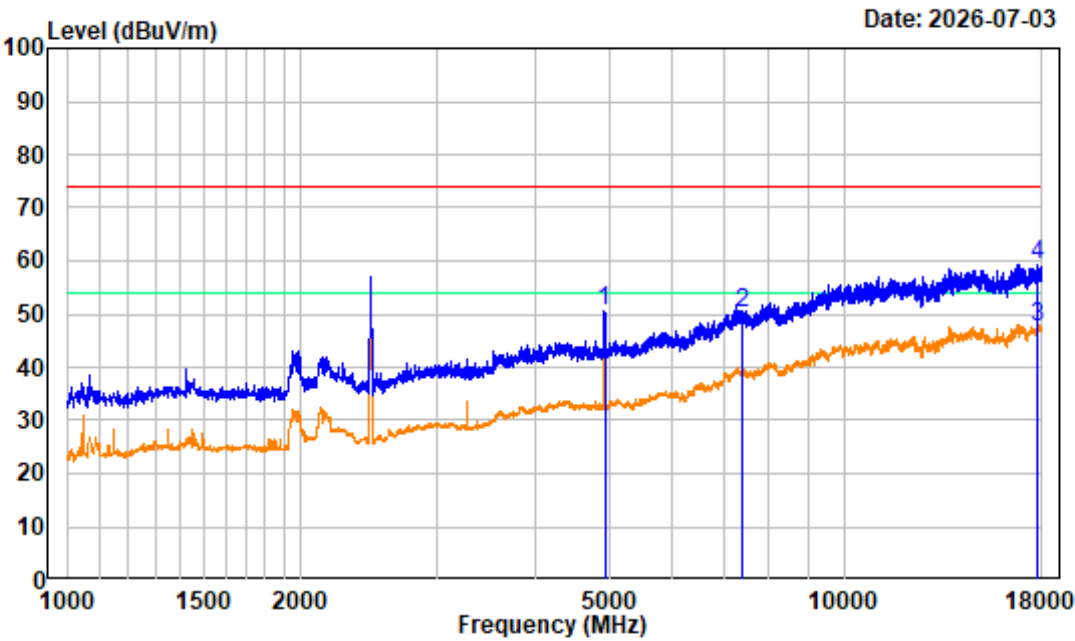

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.91	57.55	50.64	74.00	-23.36 Peak
2	7386.000	-1.15	51.19	50.04	74.00	-23.96 Peak
3	17806.630	7.22	40.38	47.60	54.00	-6.40 Average
4	17806.630	7.22	52.10	59.32	74.00	-14.68 Peak


2.4G WIFI 802.11b High Channel 1GHz-18GHz_VERTICAL

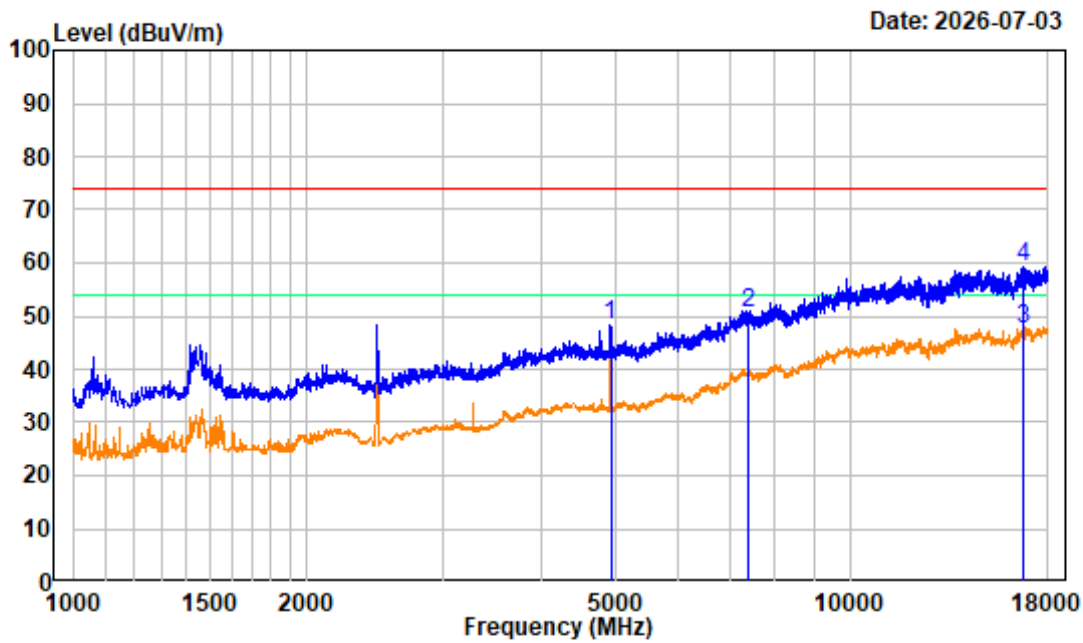

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.91	55.26	48.35	74.00	-25.65 Peak
2	7386.000	-1.15	51.60	50.45	74.00	-23.55 Peak
3	16718.630	7.30	40.26	47.56	54.00	-6.44 Average
4	16718.630	7.30	52.09	59.39	74.00	-14.61 Peak

2.4G WIFI 802.11b High Channel Bandedge_HORIZONTAL

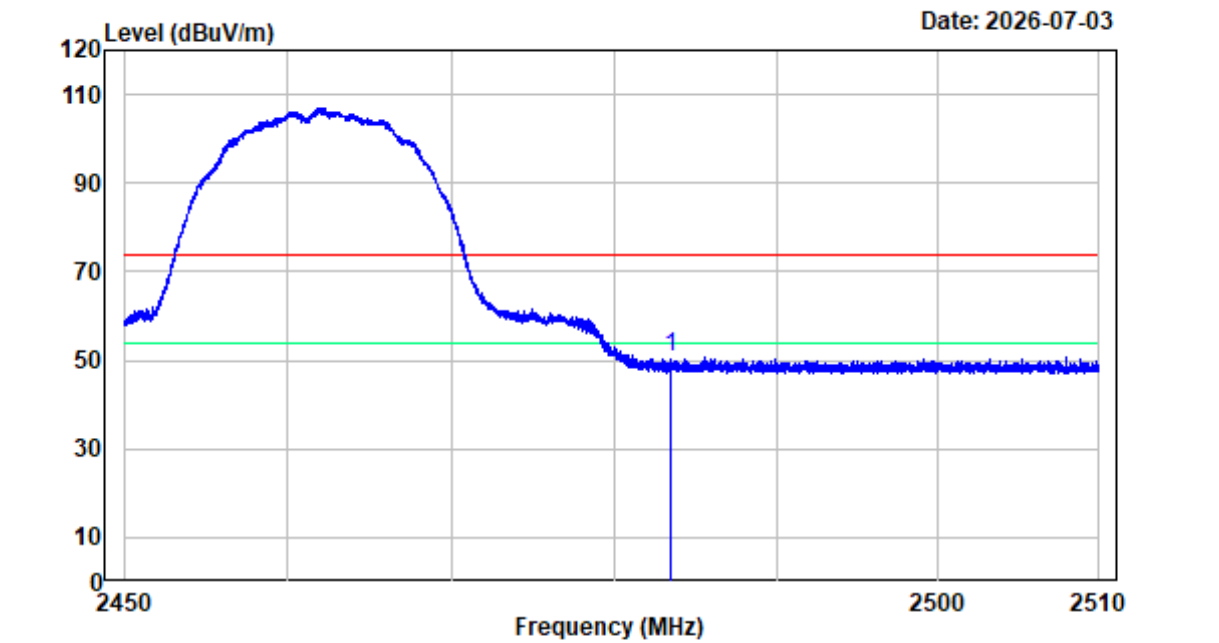

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11b High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.97	61.65	50.68	74.00	-23.32	Peak

2.4G WIFI 802.11b High Channel Bandedge_VERTICAL

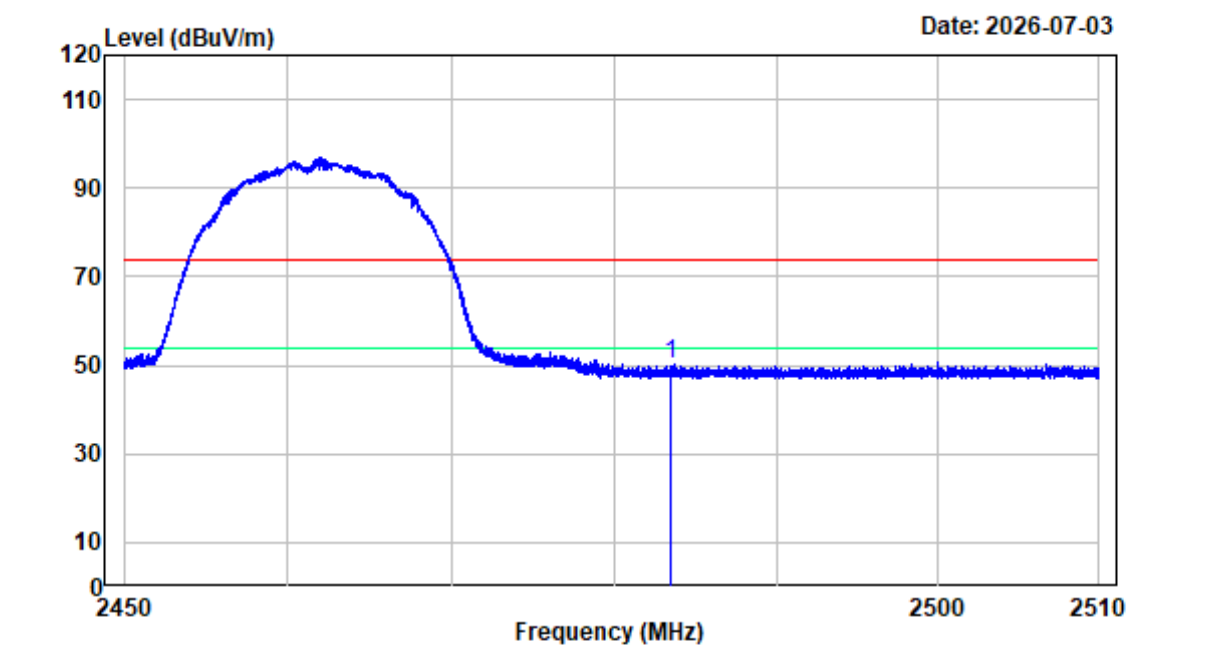

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11b High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.97	61.14	50.17	74.00	-23.83	Peak


2.4G WIFI 802.11g Low Channel 1GHz-18GHz_HORIZONTAL

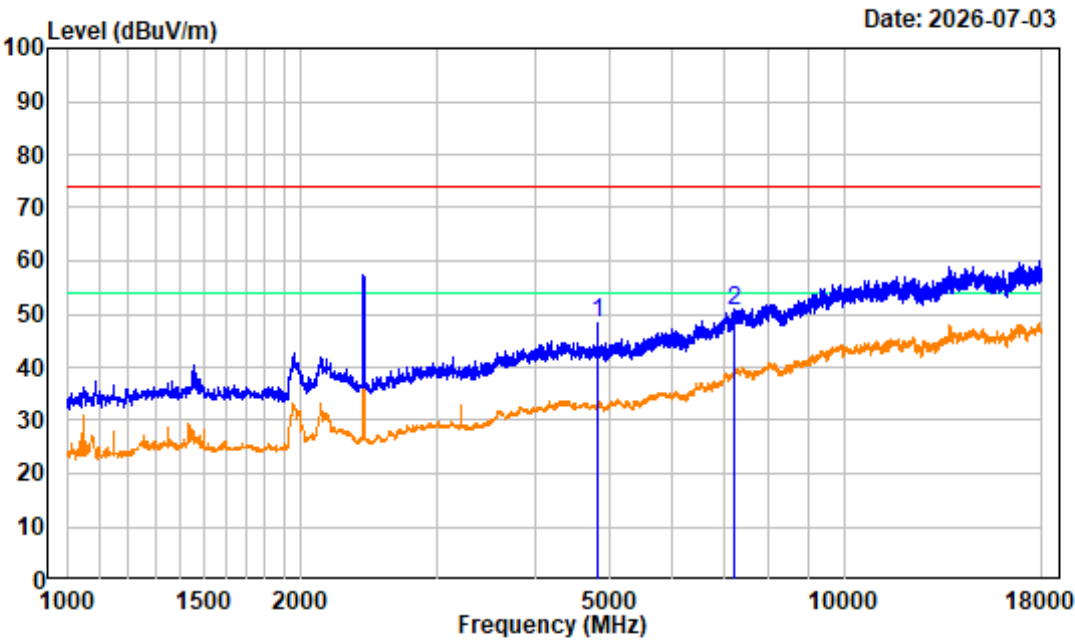

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	55.26	48.35	74.00	-25.65 Peak
2	7236.000	-1.57	52.05	50.48	74.00	-23.52 Peak

2.4G WIFI 802.11g Low Channel 1GHz-18GHz_VERTICAL

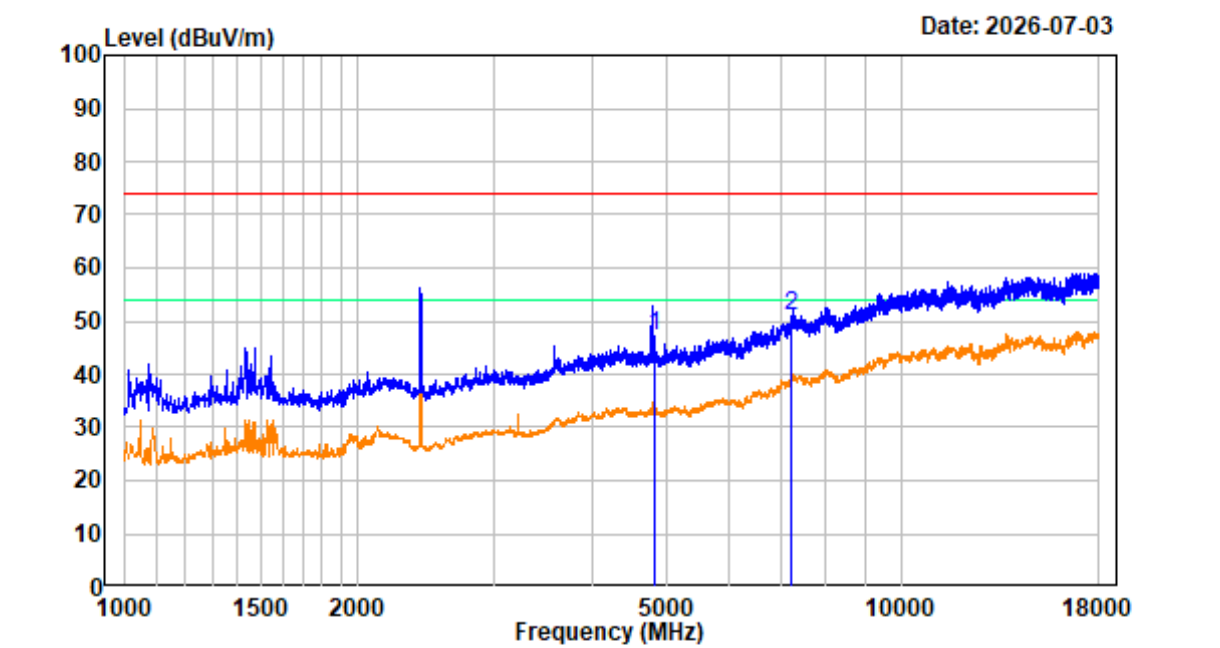

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4824.000	-6.91	54.27	47.36	74.00	-26.64 Peak
2	7236.000	-1.57	52.35	50.78	74.00	-23.22 Peak


2.4G WIFI 802.11g Low Channel 18GHz-25GHz_HORIZONTAL

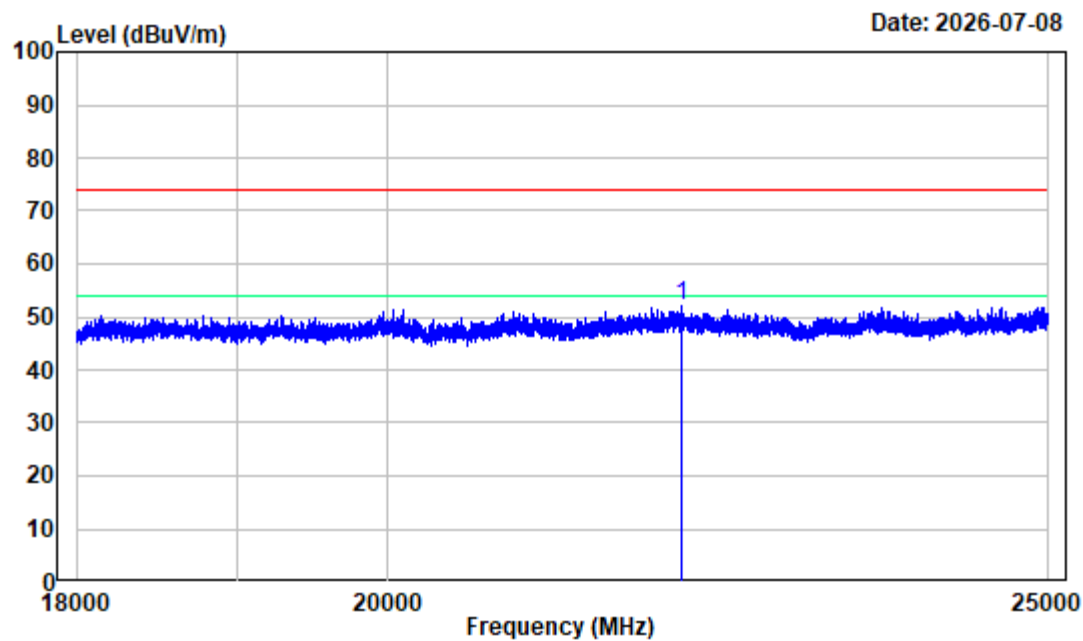

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 22087.130	0.72	51.33	52.05	74.00	-21.95	Peak


2.4G WIFI 802.11g Low Channel 18GHz-25GHz_VERTICAL

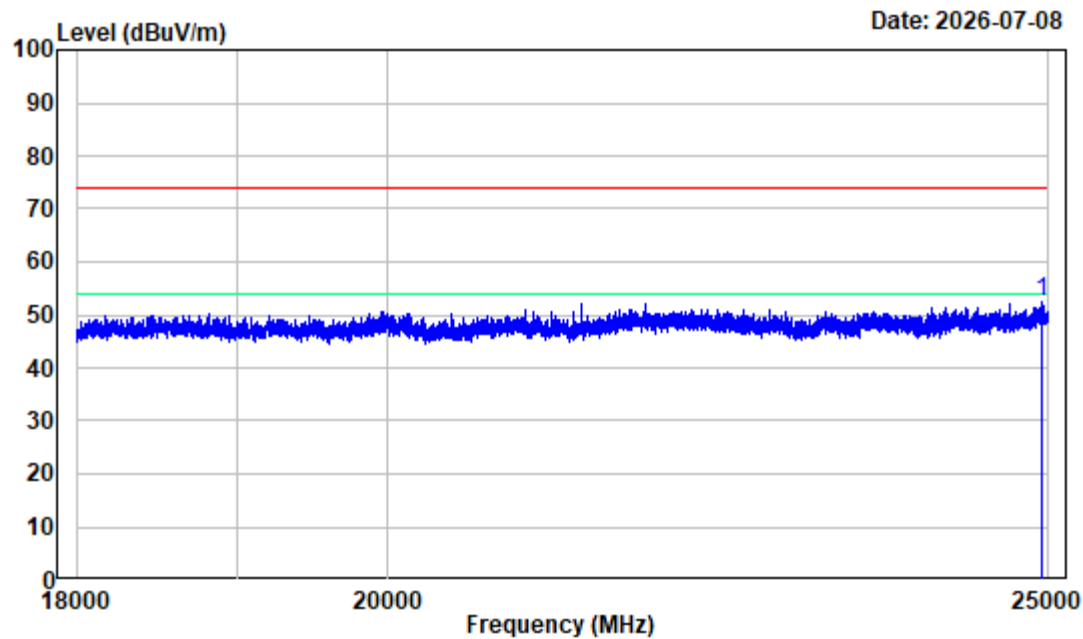

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Limit Level	Over Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24947.500	4.21	48.28	52.49	74.00	-21.51	Peak


2.4G WIFI 802.11g Low Channel Bandedge_HORIZONTAL

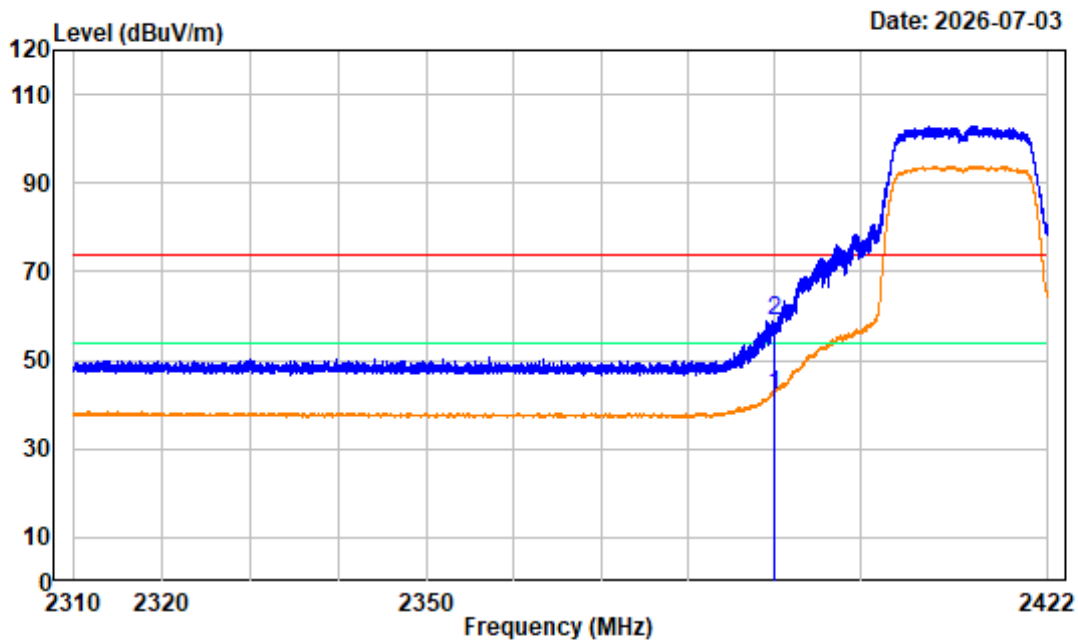

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	53.27	42.34	54.00	-11.66	Average
2	2390.000	-10.93	69.69	58.76	74.00	-15.24	Peak

2.4G WIFI 802.11g Low Channel Bandedge_VERTICAL

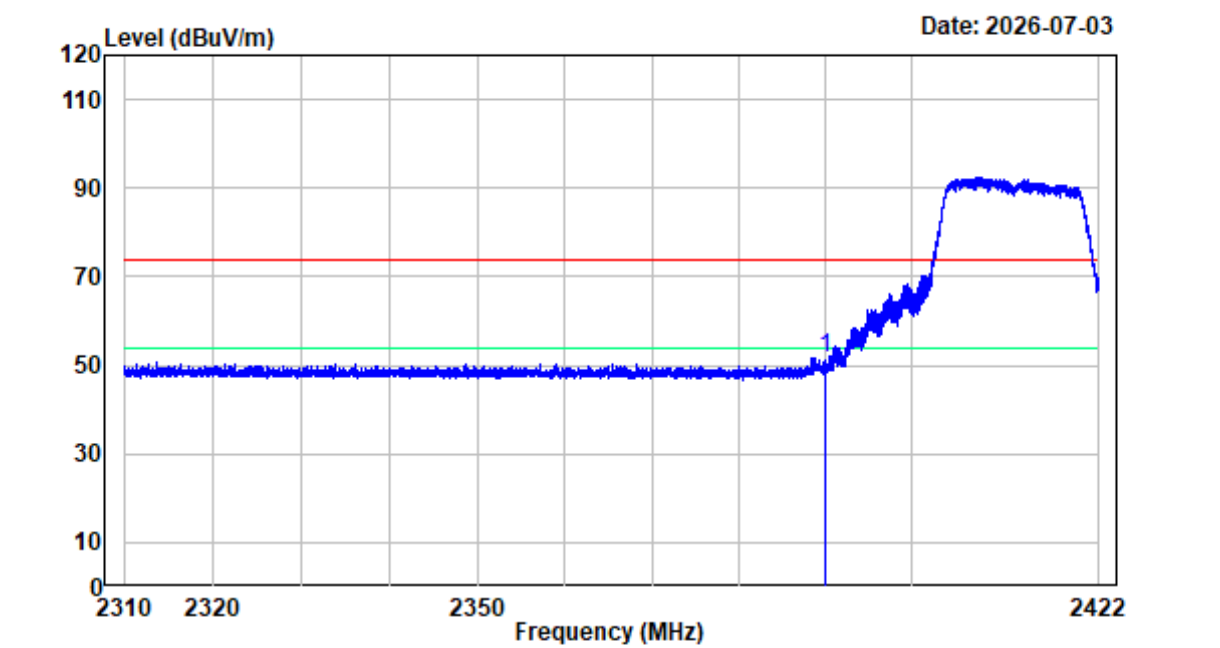

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g Low Channel 2412MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.93	62.67	51.74	74.00	-22.26	Peak


2.4G WIFI 802.11g Middle Channel 1GHz-18GHz_HORIZONTAL

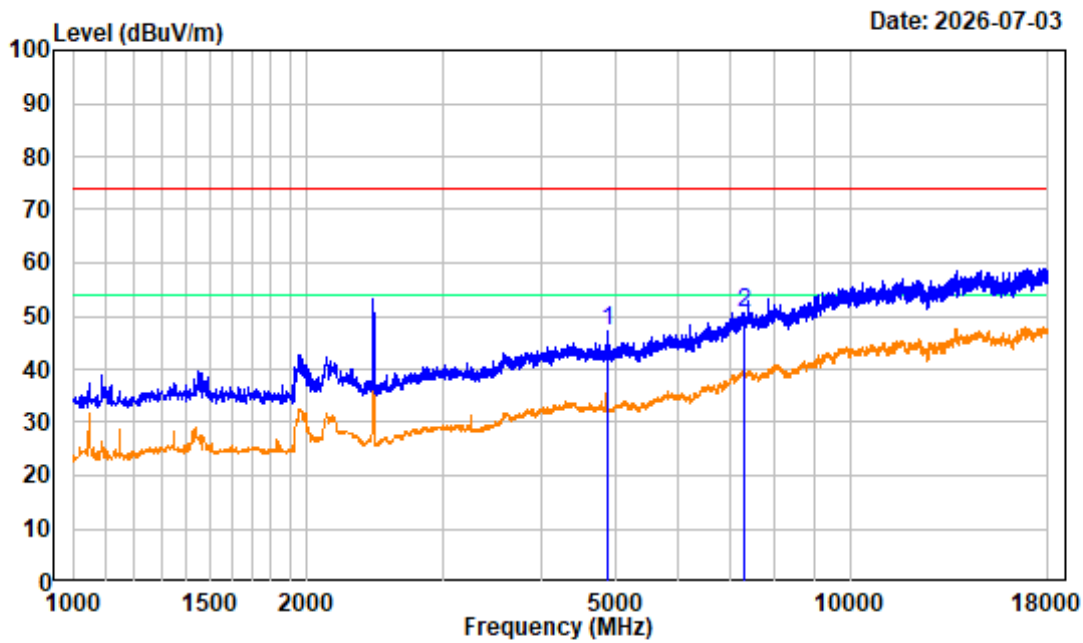

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	54.27	47.31	74.00	-26.69 Peak
2	7311.000	-1.24	51.80	50.56	74.00	-23.44 Peak


2.4G WIFI 802.11g Middle Channel 1GHz-18GHz_VERTICAL

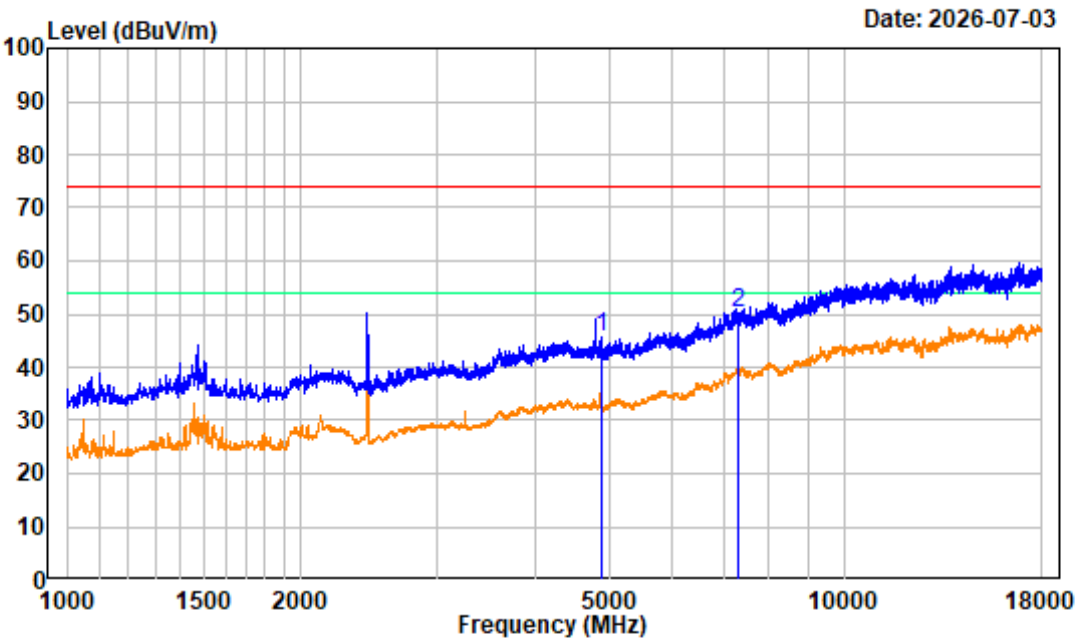

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4874.000	-6.96	52.72	45.76	74.00	-28.24 Peak
2	7311.000	-1.24	51.41	50.17	74.00	-23.83 Peak


2.4G WIFI 802.11g High Channel 1GHz-18GHz_HORIZONTAL

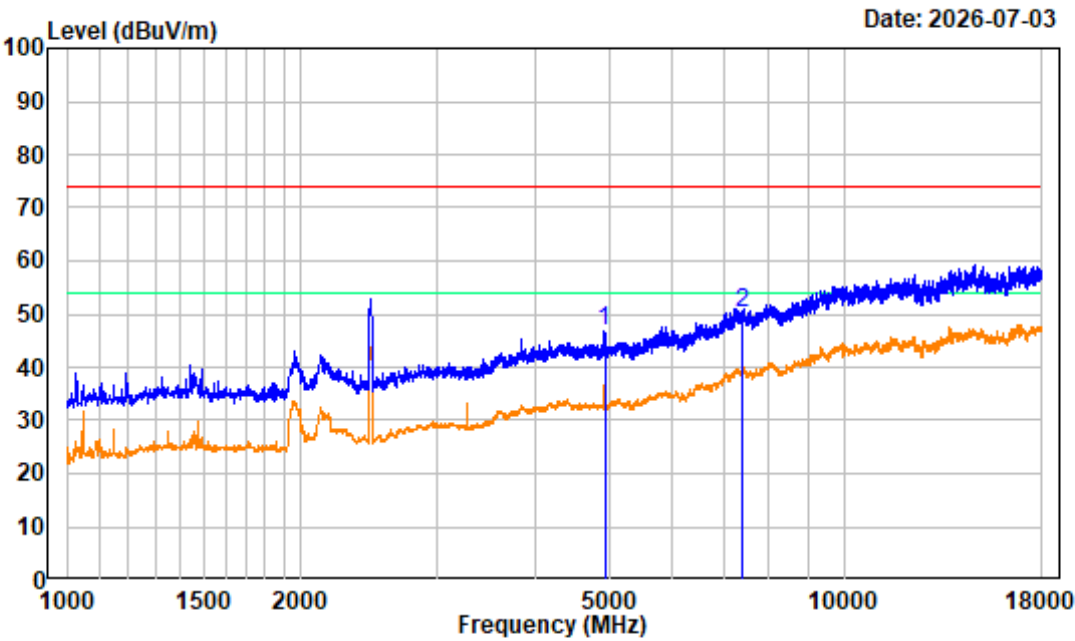

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.91	53.60	46.69	74.00	-27.31 Peak
2	7386.000	-1.15	51.31	50.16	74.00	-23.84 Peak

2.4G WIFI 802.11g High Channel 1GHz-18GHz_VERTICAL

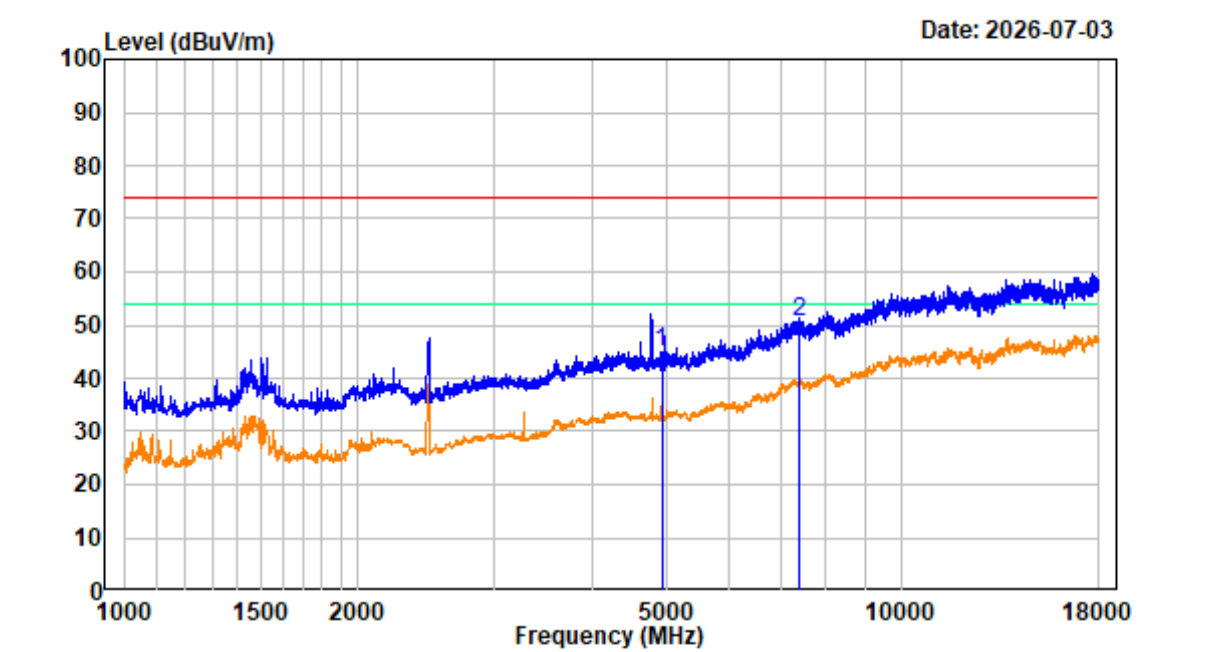

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g High Channel 2462MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4924.000	-6.91	51.84	44.93	74.00	-29.07 Peak
2	7386.000	-1.15	51.60	50.45	74.00	-23.55 Peak


2.4G WIFI 802.11g High Channel Bandedge_HORIZONTAL

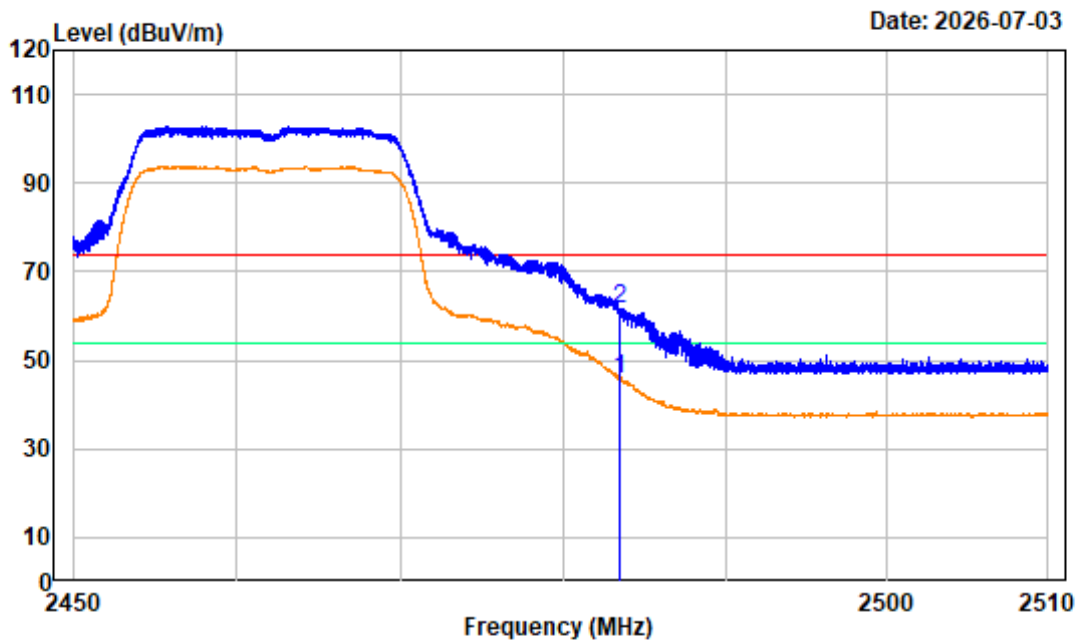

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2483.500	-10.97	56.93	45.96	54.00	-8.04 Average
2	2483.500	-10.97	72.61	61.64	74.00	-12.36 Peak

2.4G WIFI 802.11g High Channel Bandedge_VERTICAL

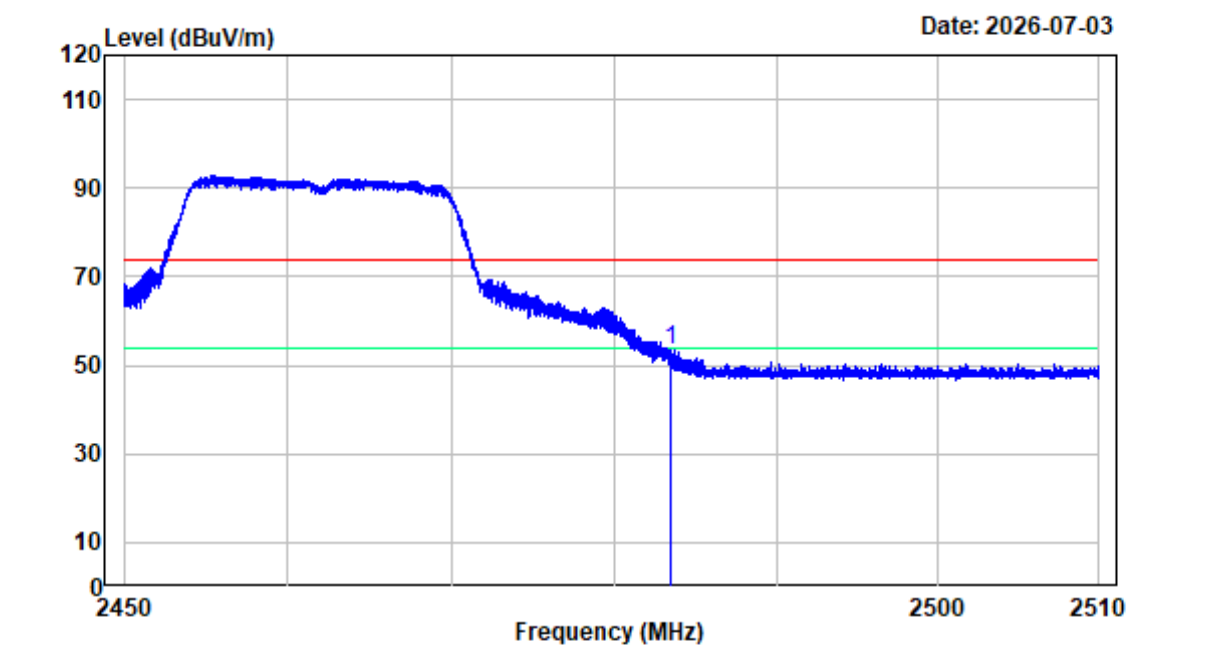

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.97	64.22	53.25	74.00	-20.75	Peak


2.4G WIFI 802.11n20 Low Channel 1GHz-18GHz_HORIZONTAL

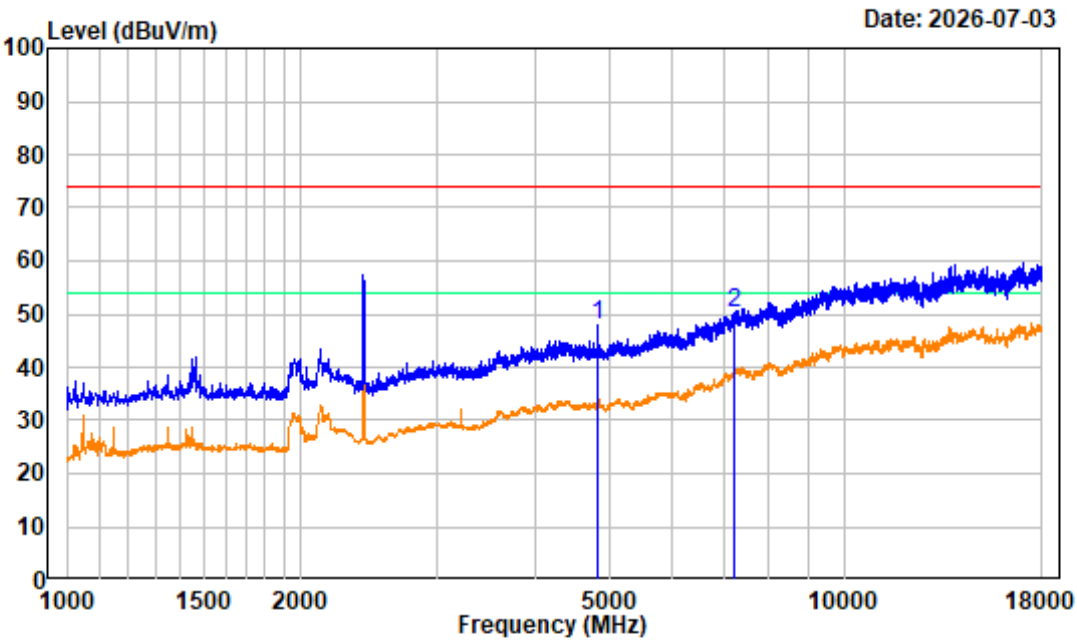

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	54.71	47.80	74.00	-26.20 Peak
2	7236.000	-1.57	51.91	50.34	74.00	-23.66 Peak


2.4G WIFI 802.11n20 Low Channel 1GHz-18GHz_VERTICAL

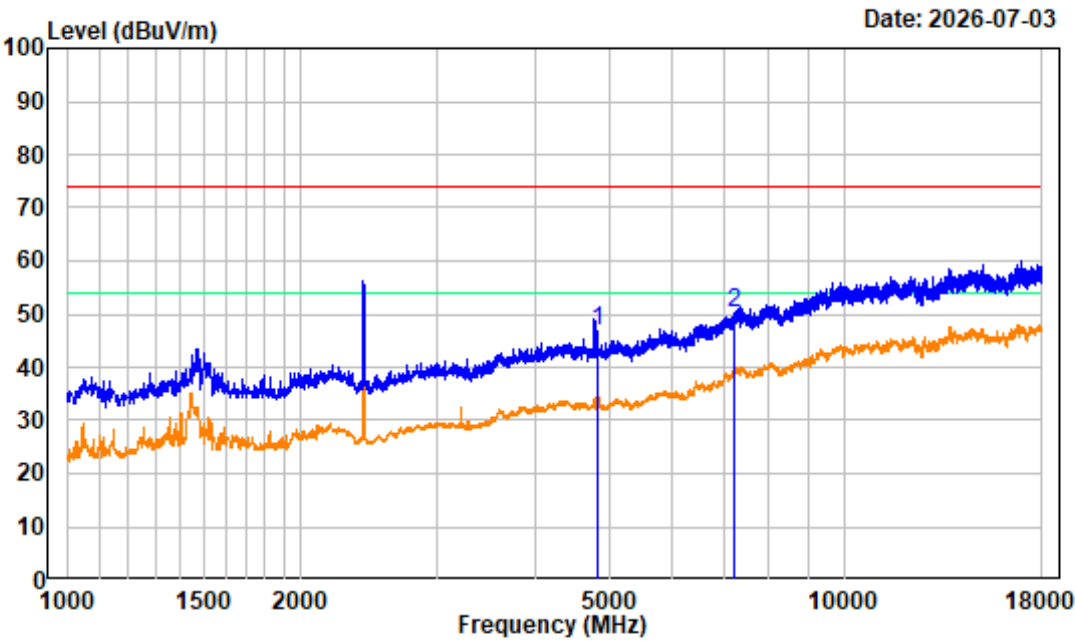

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	53.59	46.68	74.00	-27.32 Peak
2	7236.000	-1.57	51.68	50.11	74.00	-23.89 Peak


2.4G WIFI 802.11n20 Low Channel Bandedge_HORIZONTAL

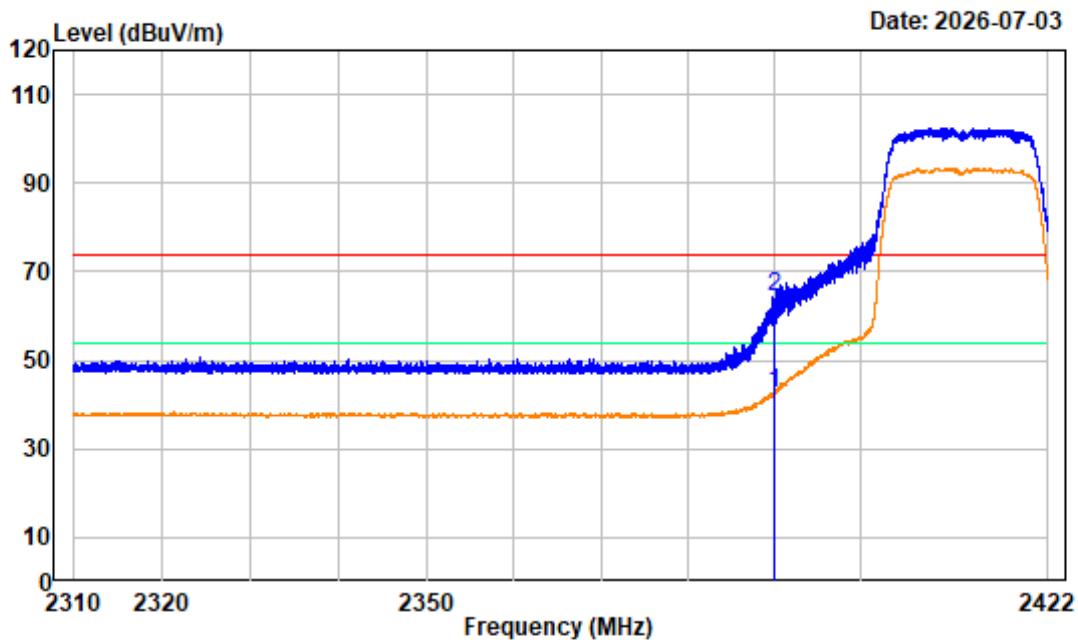

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.93	53.42	42.49	54.00	-11.51	Average
2 2390.000	-10.93	75.23	64.30	74.00	-9.70	Peak

2.4G WIFI 802.11n20 Low Channel Bandedge_VERTICAL

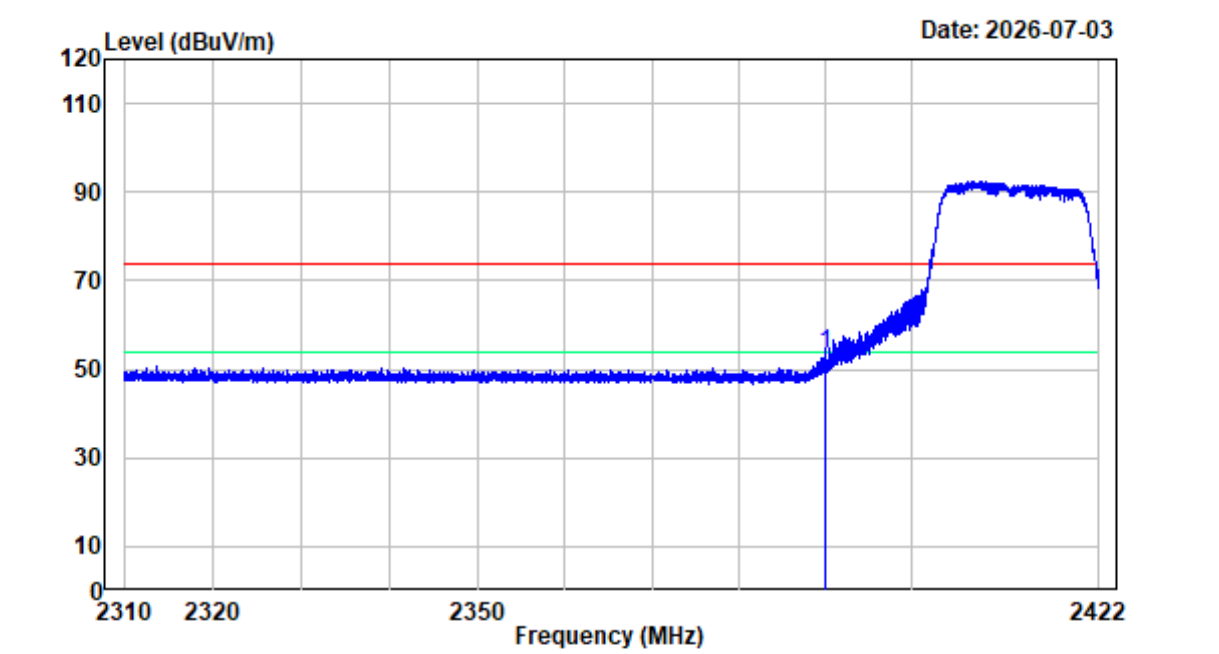

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.93	64.17	53.24	74.00	-20.76	Peak


2.4G WIFI 802.11n20 Middle Channel 1GHz-18GHz_HORIZONTAL

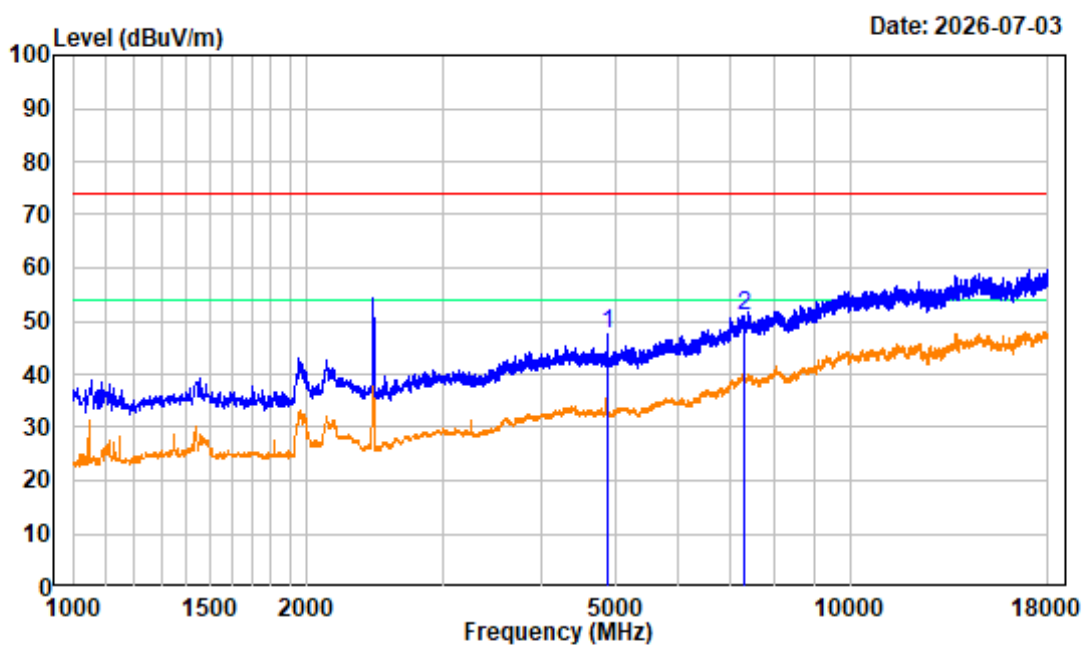

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	54.34	47.38	74.00	-26.62 Peak
2	7311.000	-1.24	52.01	50.77	74.00	-23.23 Peak


2.4G WIFI 802.11n20 Middle Channel 1GHz-18GHz_VERTICAL

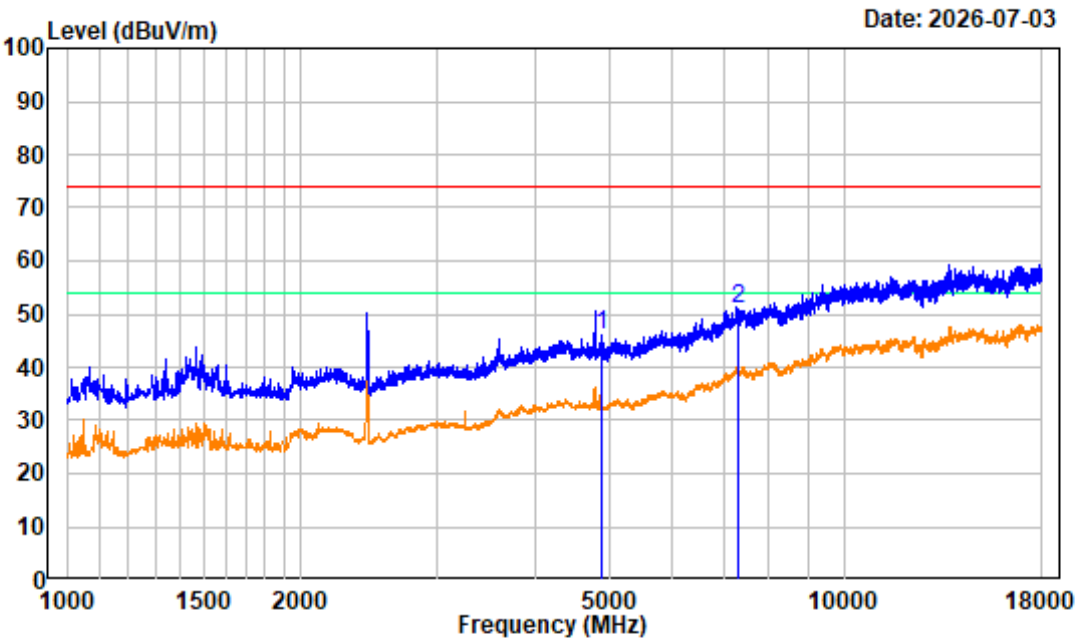

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4874.000	-6.96	52.94	45.98	74.00	-28.02 Peak
2	7311.000	-1.24	52.18	50.94	74.00	-23.06 Peak


2.4G WIFI 802.11n20 High Channel 1GHz-18GHz_HORIZONTAL

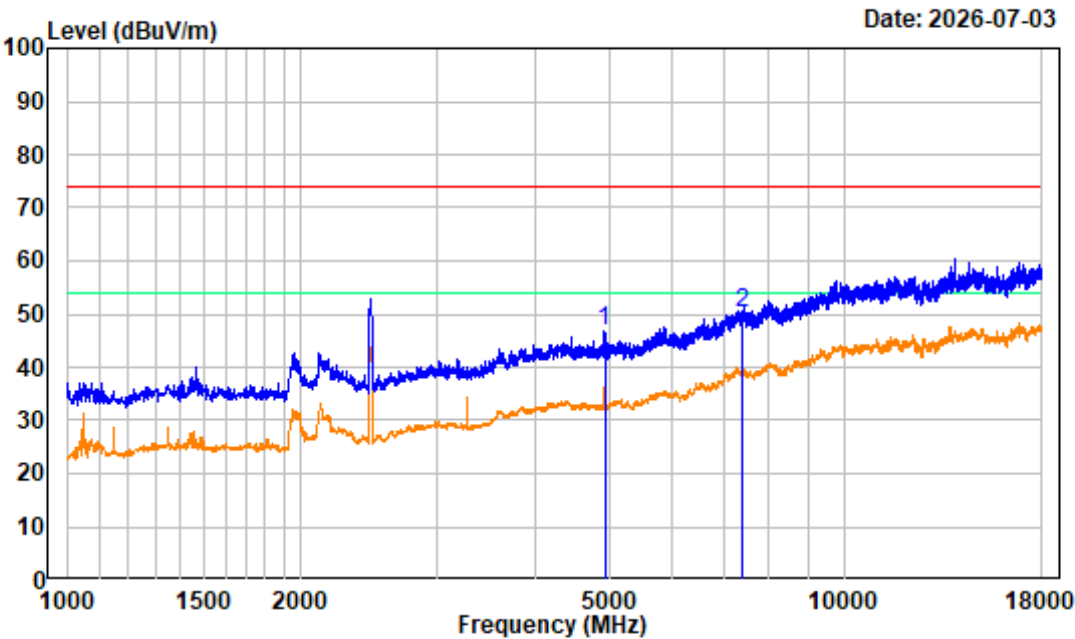

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.91	53.76	46.85	74.00	-27.15 Peak
2	7386.000	-1.15	51.22	50.07	74.00	-23.93 Peak


2.4G WIFI 802.11n20 High Channel 1GHz-18GHz_VERTICAL

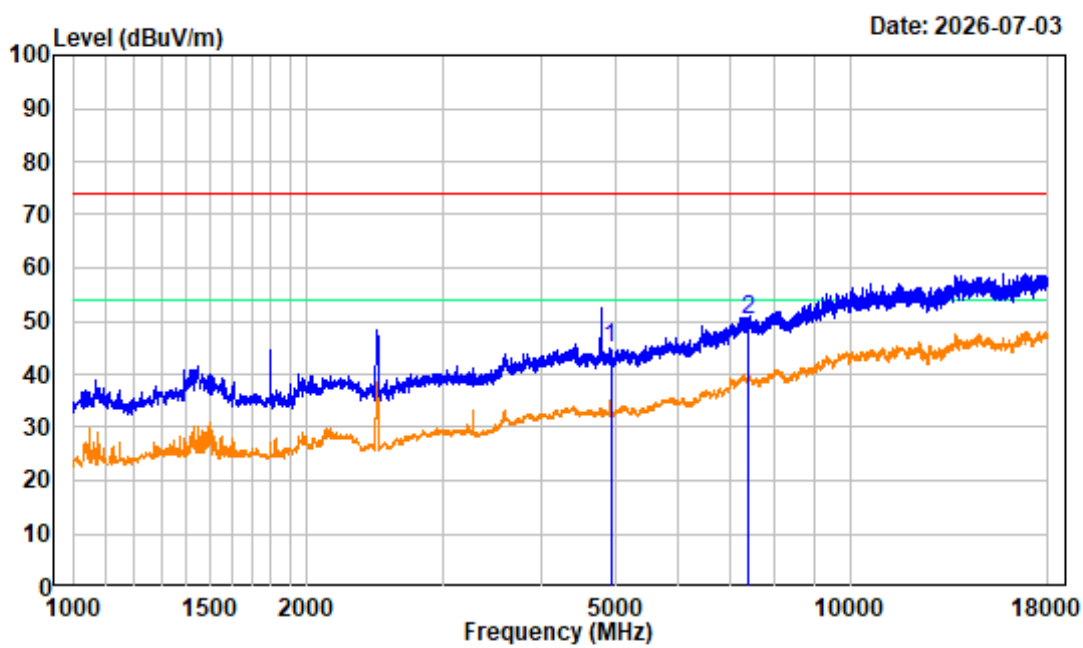

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.91	51.88	44.97	74.00	-29.03 Peak
2	7386.000	-1.15	51.35	50.20	74.00	-23.80 Peak

2.4G WIFI 802.11n20 High Channel Bandedge_HORIZONTAL

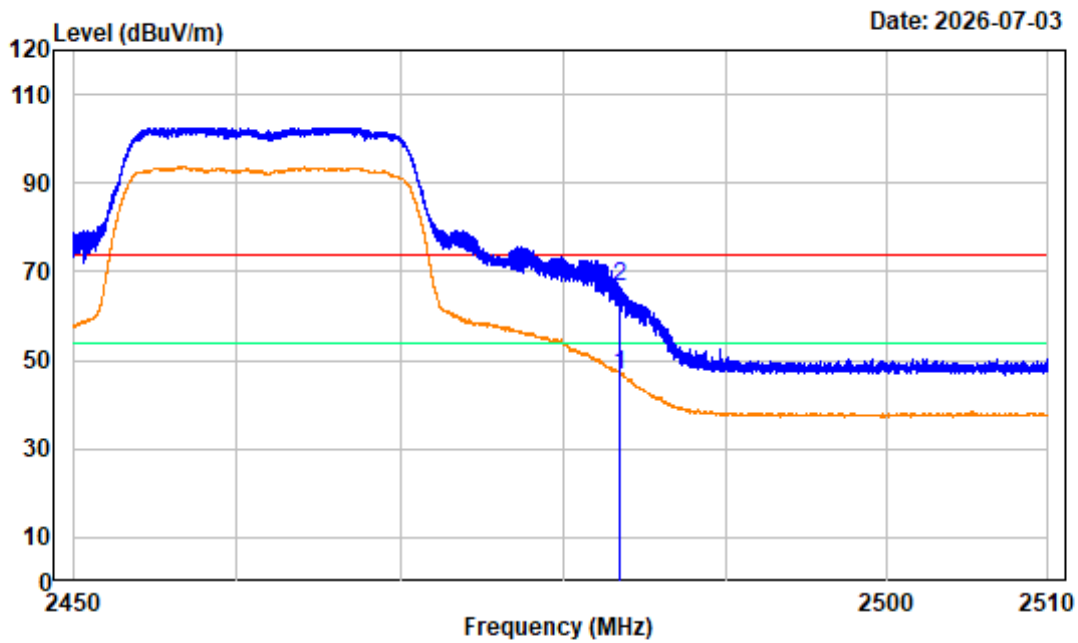

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11n20 High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2483.500	-10.97	57.84	46.87	54.00	-7.13	Average
2	2483.500	-10.97	77.75	66.78	74.00	-7.22	Peak

2.4G WIFI 802.11n20 High Channel Bandedge_VERTICAL

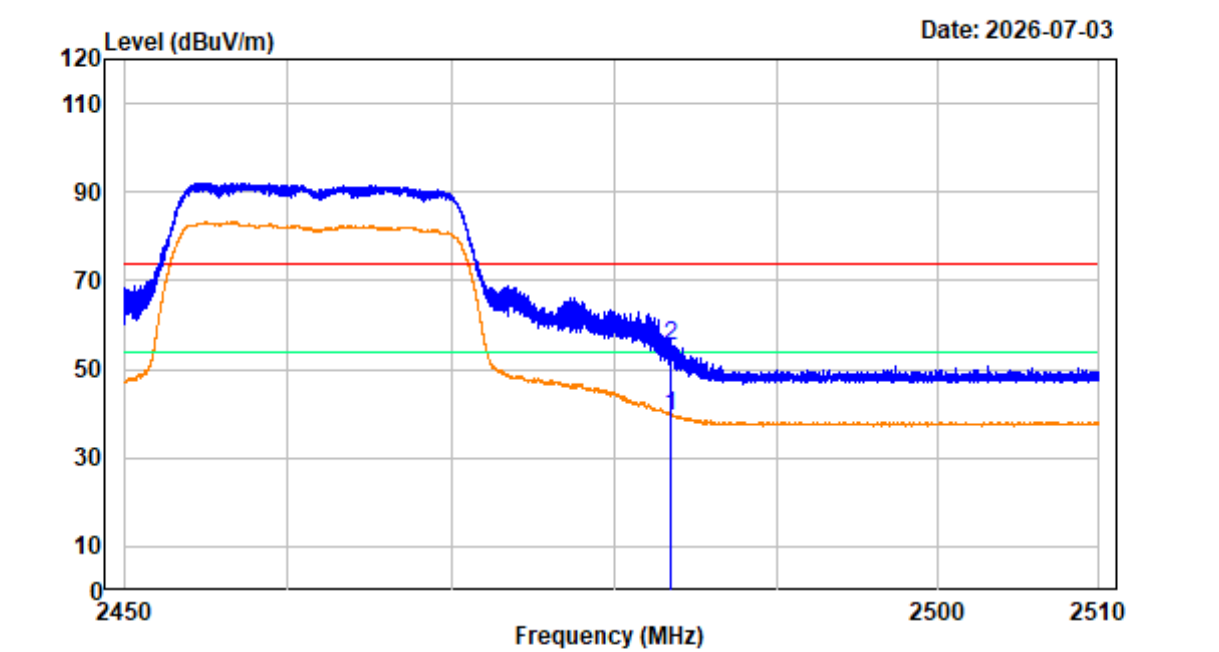

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11n20 High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2483.500 -10.97	50.54	39.57	54.00	-14.43	Average
2	2483.500 -10.97	66.42	55.45	74.00	-18.55	Peak


2.4G WIFI 802.11n40 Low Channel 1GHz-18GHz_HORIZONTAL

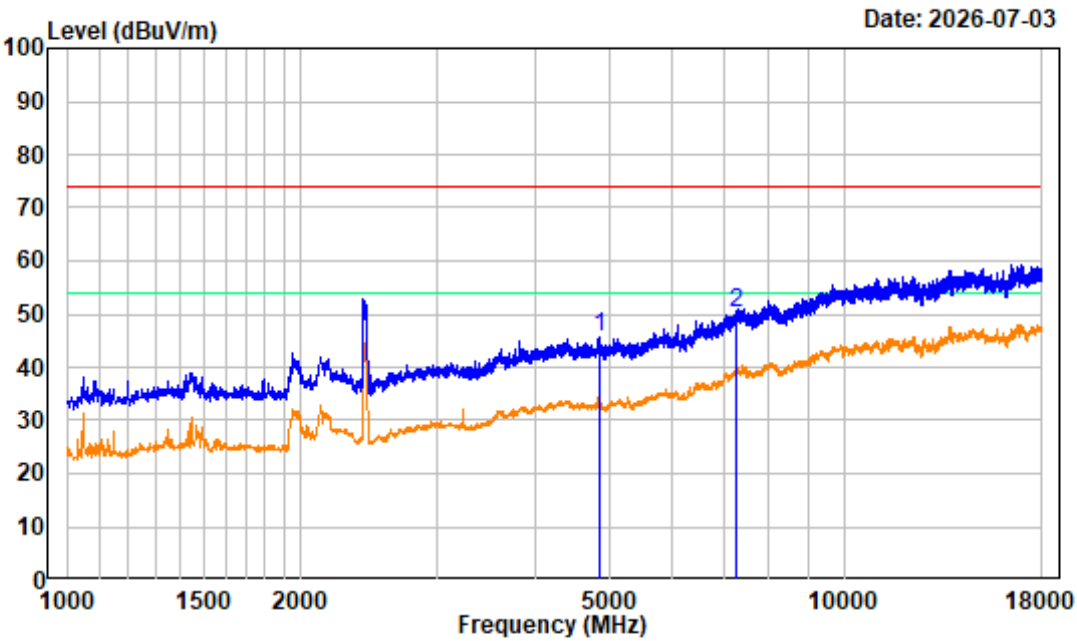

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4844.000	-6.88	52.53	45.65	74.00	-28.35 Peak
2	7266.000	-1.41	51.70	50.29	74.00	-23.71 Peak


2.4G WIFI 802.11n40 Low Channel 1GHz-18GHz_VERTICAL

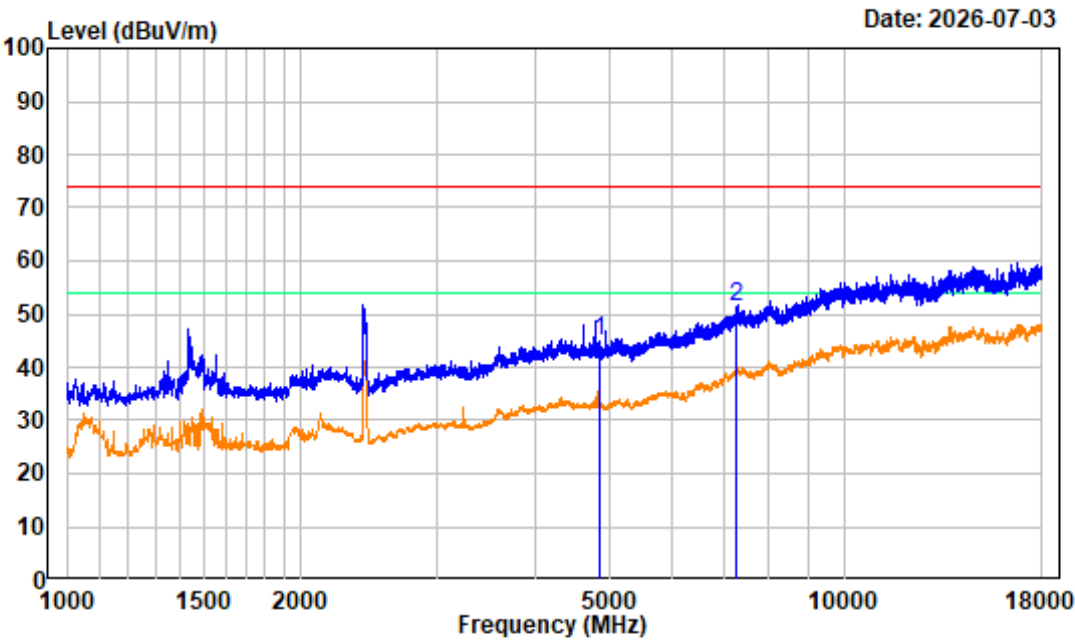

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4844.000	-6.88	51.74	44.86	74.00	-29.14 Peak
2	7266.000	-1.41	52.57	51.16	74.00	-22.84 Peak


2.4G WIFI 802.11n40 Low Channel Bandedge_HORIZONTAL

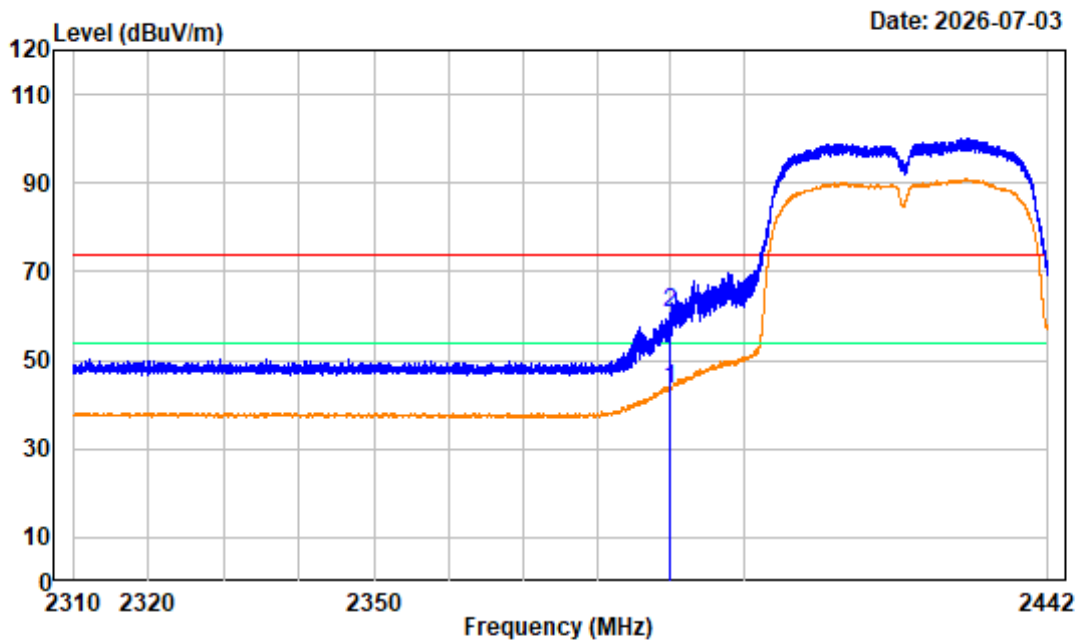

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	54.43	43.50	54.00	-10.50 Average
2	2390.000	-10.93	71.65	60.72	74.00	-13.28 Peak


2.4G WIFI 802.11n40 Low Channel Bandedge_VERTICAL

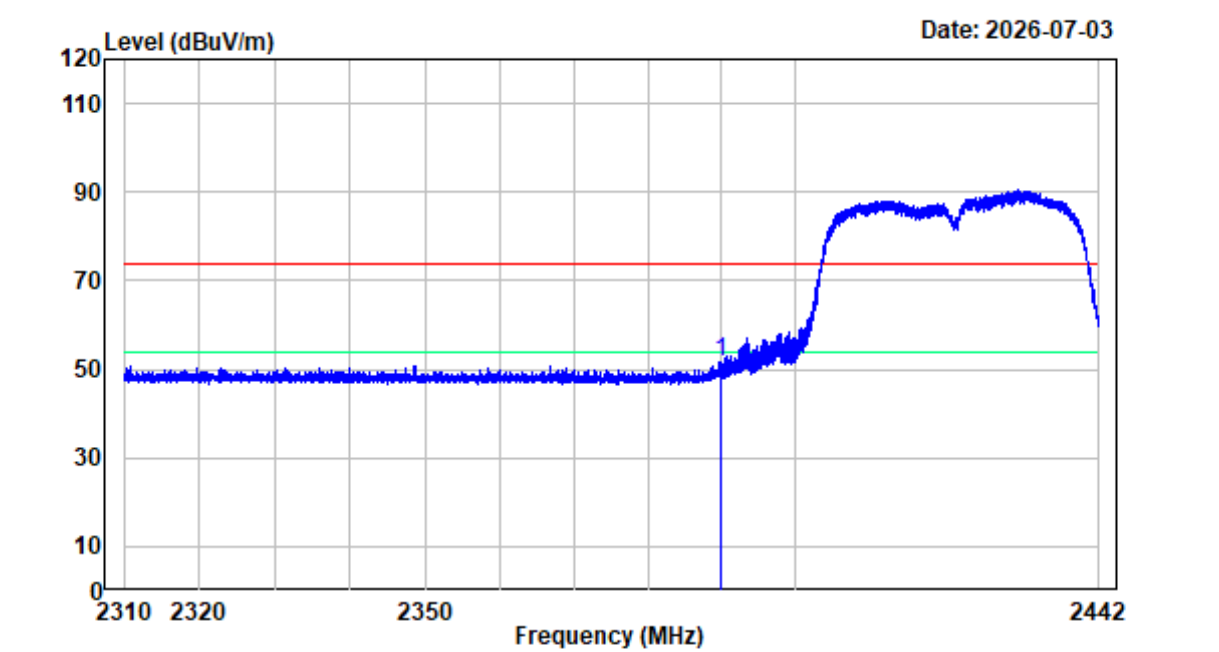

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.93	62.54	51.61	74.00	-22.39	Peak


2.4G WIFI 802.11n40 Middle Channel 1GHz-18GHz_HORIZONTAL

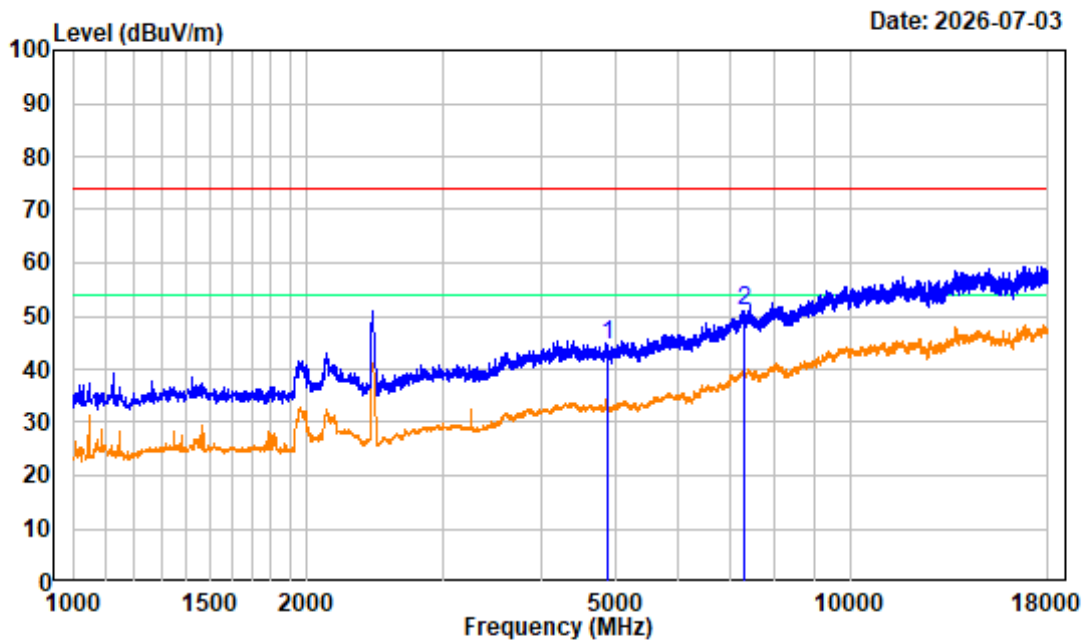

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	51.62	44.66	74.00	-29.34 Peak
2	7311.000	-1.24	52.00	50.76	74.00	-23.24 Peak


2.4G WIFI 802.11n40 Middle Channel 1GHz-18GHz_VERTICAL

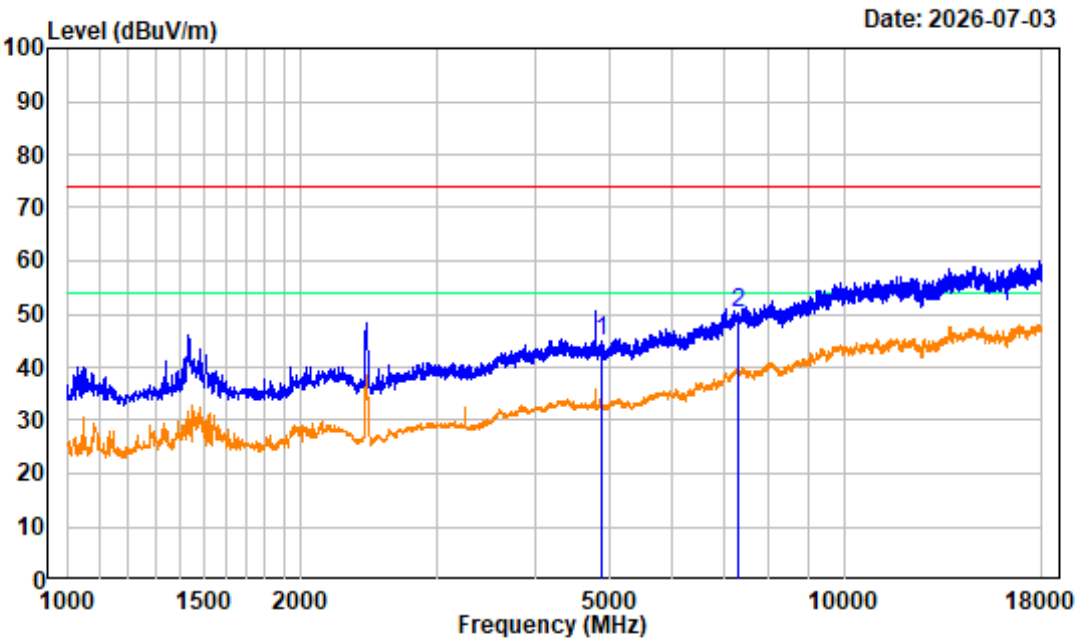

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4874.000	-6.96	51.85	44.89	74.00	-29.11 Peak
2	7311.000	-1.24	51.38	50.14	74.00	-23.86 Peak


2.4G WIFI 802.11n40 High Channel 1GHz-18GHz_HORIZONTAL

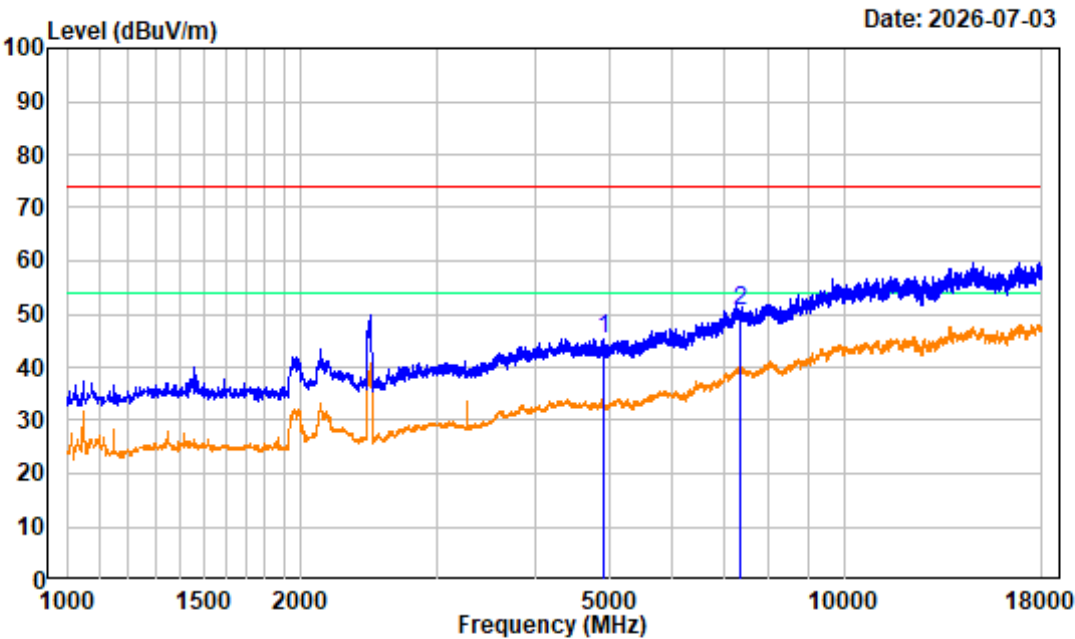

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 High Channel 2452MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	-7.03	52.23	45.20	74.00	-28.80 peak
2	7356.000	-1.34	51.79	50.45	74.00	-23.55 peak


2.4G WIFI 802.11n40 High Channel 1GHz-18GHz_VERTICAL

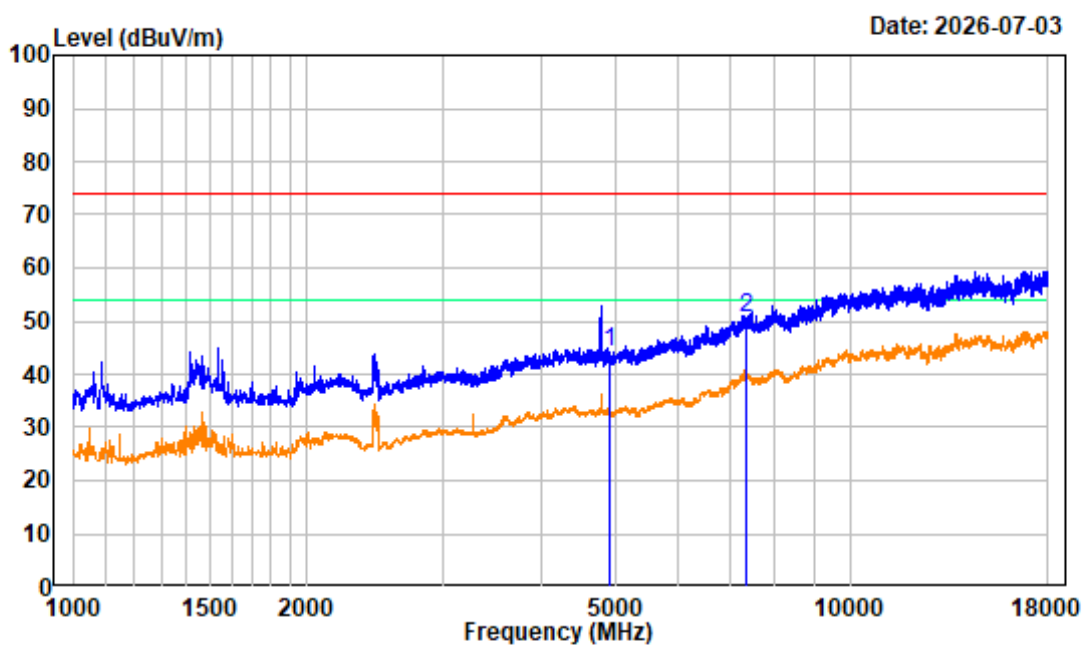

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 High Channel 2452MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	-7.03	51.10	44.07	74.00	-29.93 peak
2	7356.000	-1.34	51.76	50.42	74.00	-23.58 peak

2.4G WIFI 802.11n40 High Channel Bandedge_HORIZONTAL

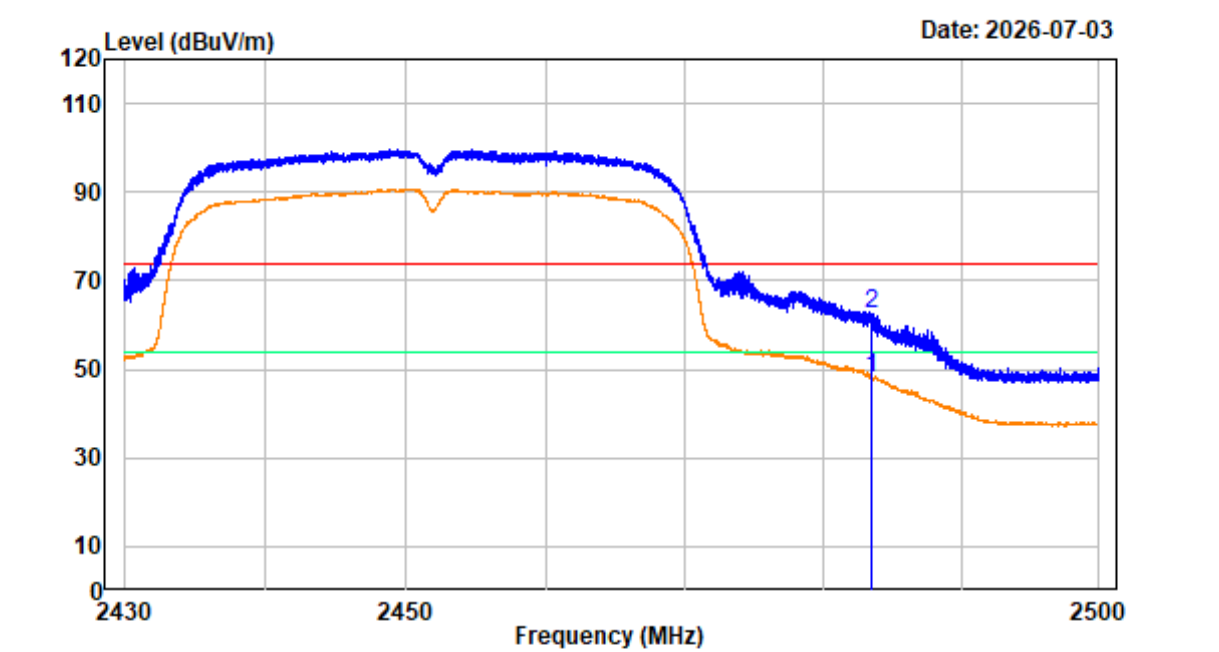

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11n40 High Channel 2452MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	59.13	48.16	54.00	-5.84 Average
2	2483.500	-10.97	73.50	62.53	74.00	-11.47 Peak

2.4G WIFI 802.11n40 High Channel Bandedge_VERTICAL

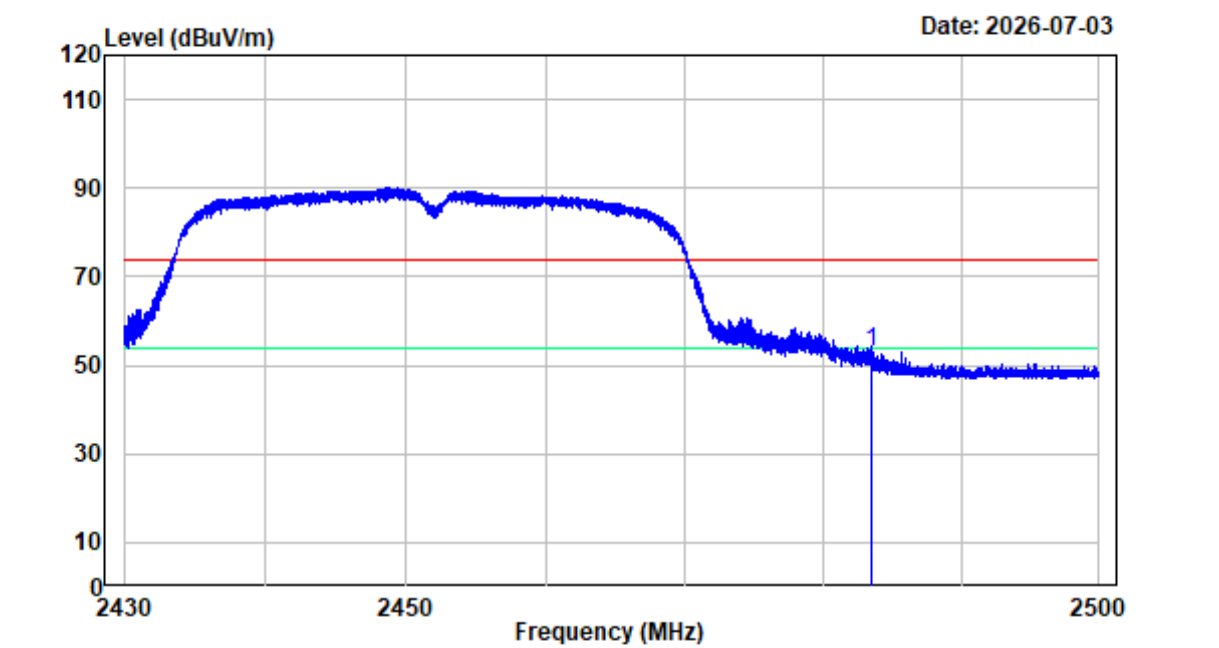

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF

Test Mode : TransmittingTester:Max Tao


Note : 2.4G WIFI 802.11n40 High Channel 2452MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	64.04	53.07	74.00	-20.93 Peak

For Simultaneous Transmission: 802.11g ANT0 Low Channel + AWS Band Downlink 2132.5MHz


1GHz-4GHz_HORIZONTAL

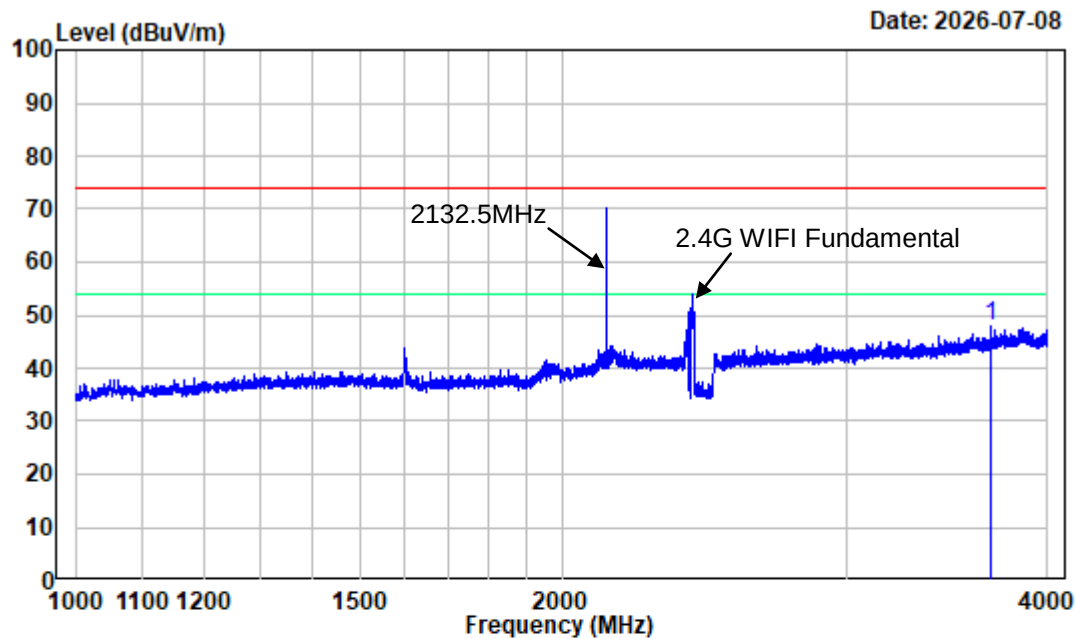

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3689.500	-8.89	56.89	48.00	74.00	-26.00 Peak


1GHz-4GHz_VERTICAL

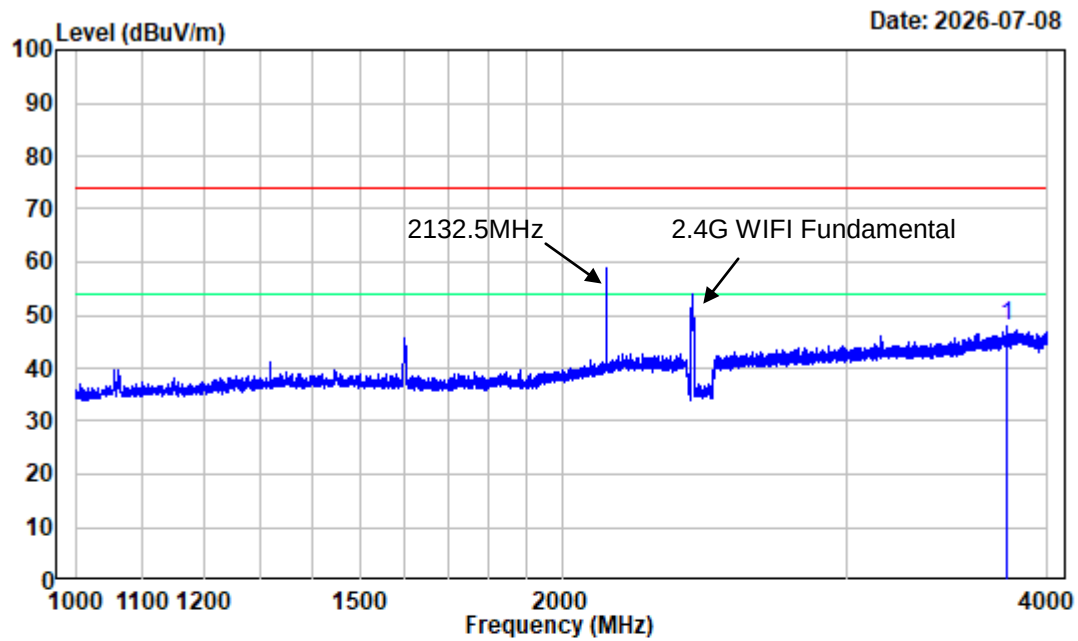

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3776.125	-8.71	56.49	47.78	74.00	-26.22	Peak


4GHz-18GHz_HORIZONTAL

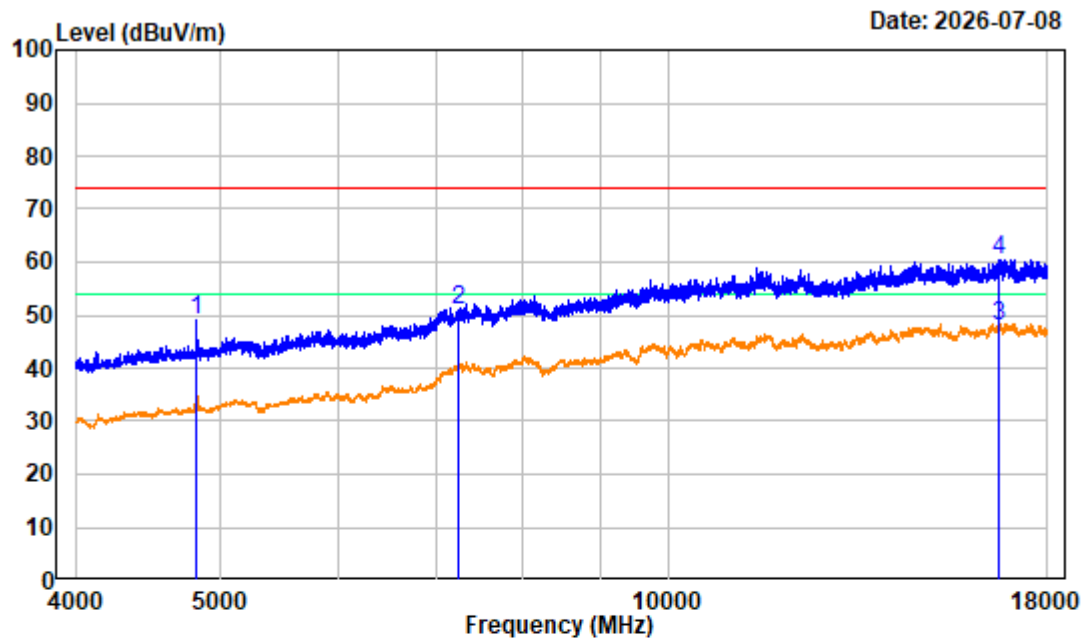

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4824.000	-6.91	56.05	49.14	74.00	-24.86	Peak
2 7236.000	-1.57	52.36	50.79	74.00	-23.21	Peak
3 16706.750	7.13	40.64	47.77	54.00	-6.23	Average
4 16706.750	7.13	53.38	60.51	74.00	-13.49	Peak


4GHz-18GHz_VERTICAL

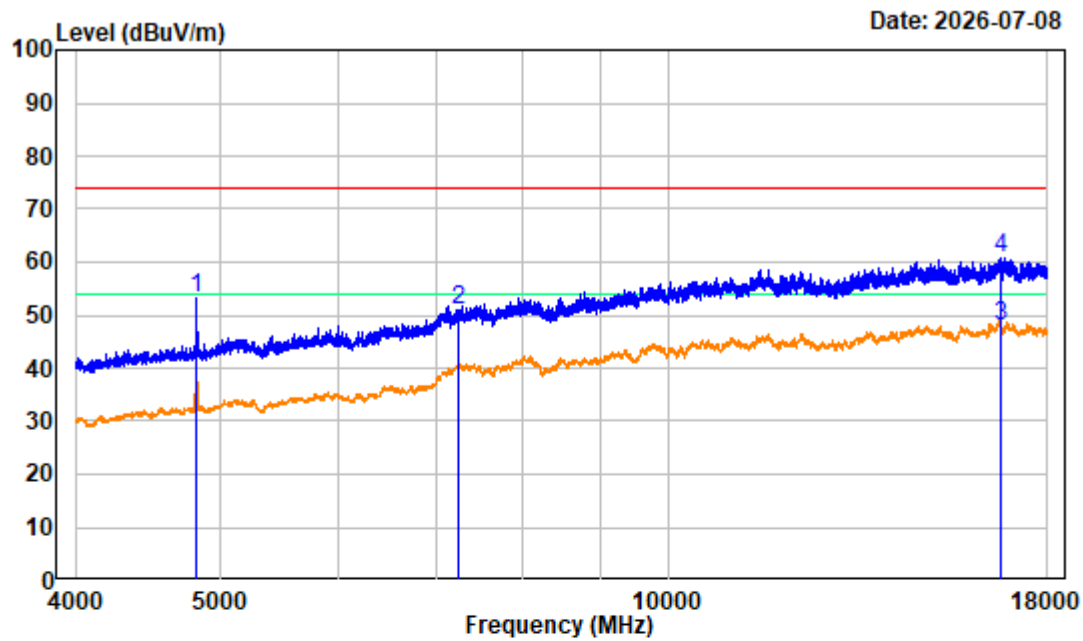

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	59.96	53.05	74.00	-20.95	Peak
2	7236.000	-1.57	52.37	50.80	74.00	-23.20	Peak
3	16750.500	7.76	40.11	47.87	54.00	-6.13	Average
4	16750.500	7.76	52.93	60.69	74.00	-13.31	Peak


18GHz-25GHz_HORIZONTAL

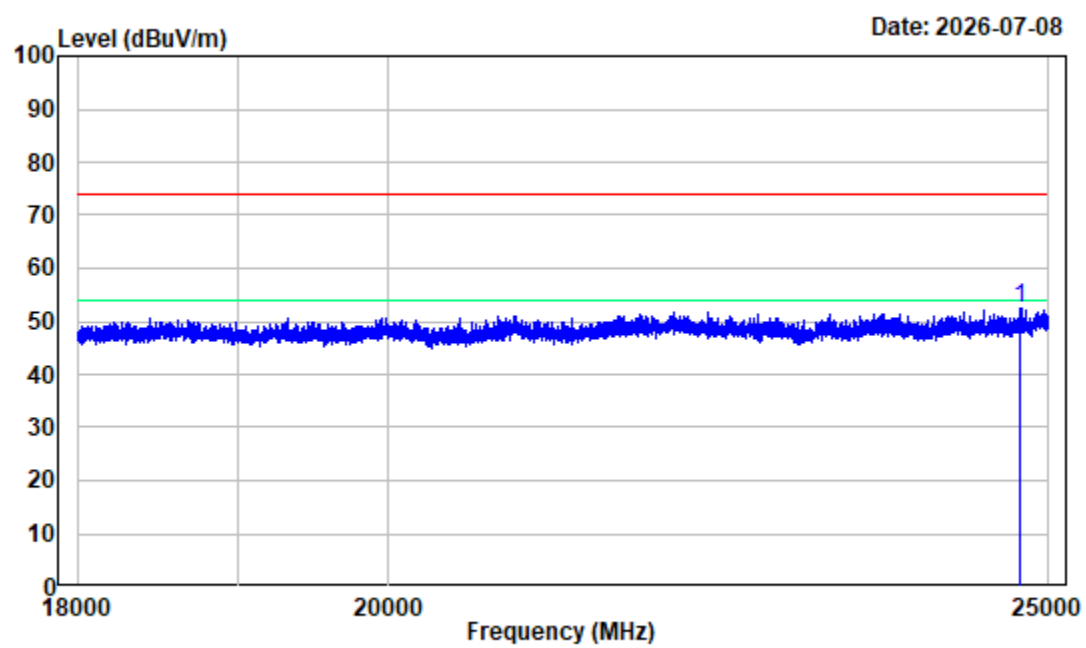

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2132.5MHz+2.4G 802.11g Low Channel 2412MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24756.750	3.77	48.58	52.35	74.00	-21.65	Peak

18GHz-25GHz_VERTICAL

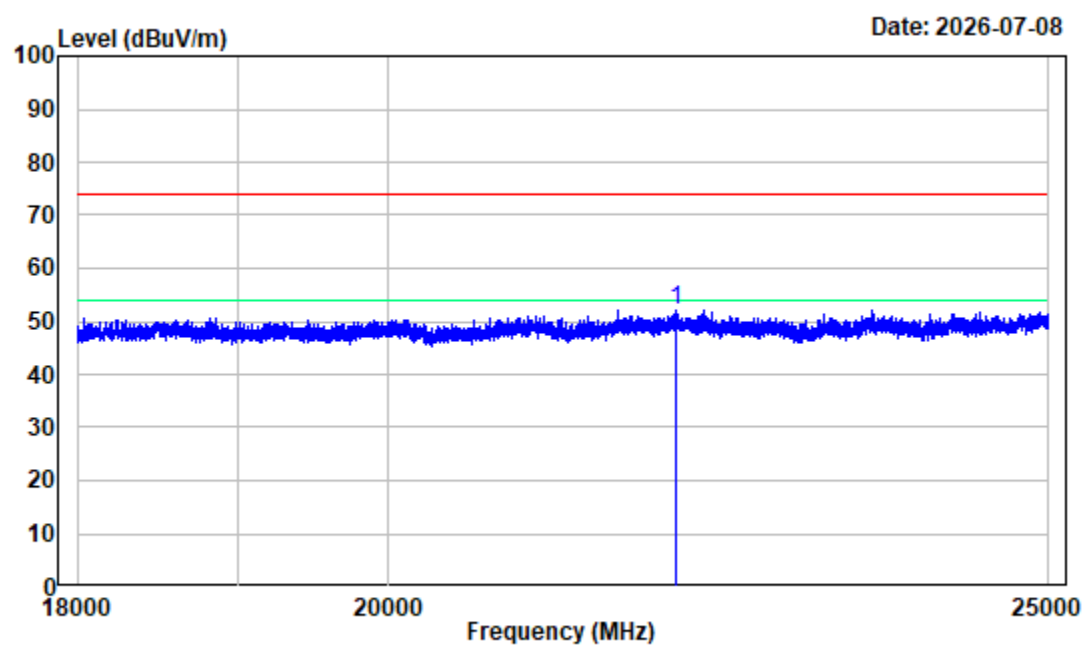


Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2132.5MHz+2.4G 802.11g Low Channel 2412MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 22043.380	0.71	51.42	52.13	74.00	-21.87	Peak

For ANT1


2.4G WIFI 802.11b Low Channel 1GHz-18GHz_HORIZONTAL

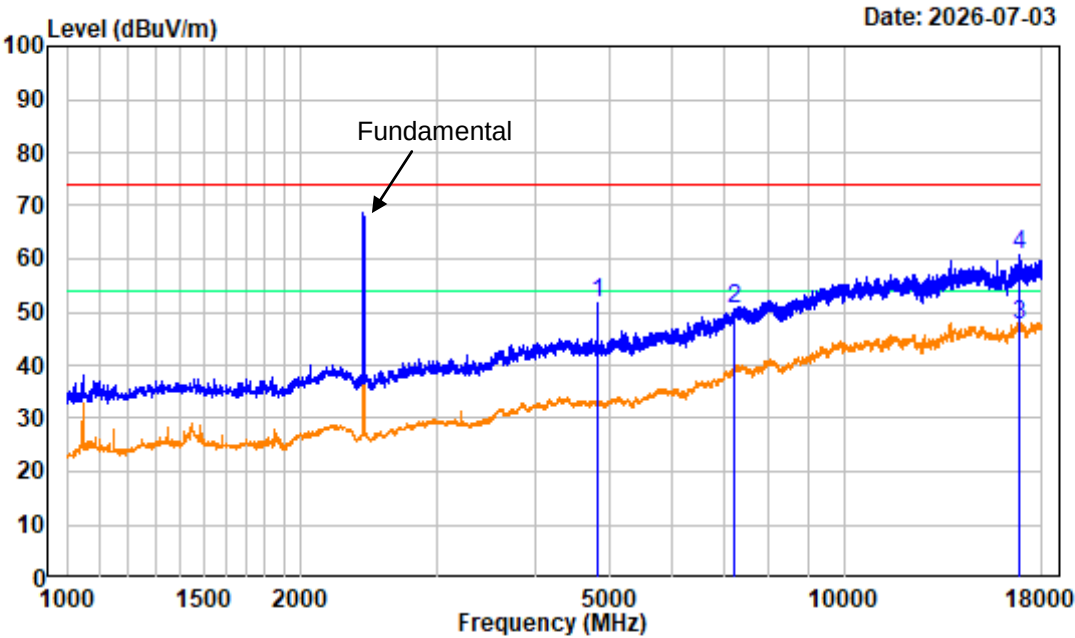

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Low Channel 2412MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	58.57	51.66	74.00	-22.34	Peak
2	7236.000	-1.57	52.06	50.49	74.00	-23.51	Peak
3	16875.880	7.84	39.52	47.36	54.00	-6.64	Average
4	16875.880	7.84	52.74	60.58	74.00	-13.42	Peak


2.4G WIFI 802.11b Low Channel 1GHz-18GHz_VERTICAL

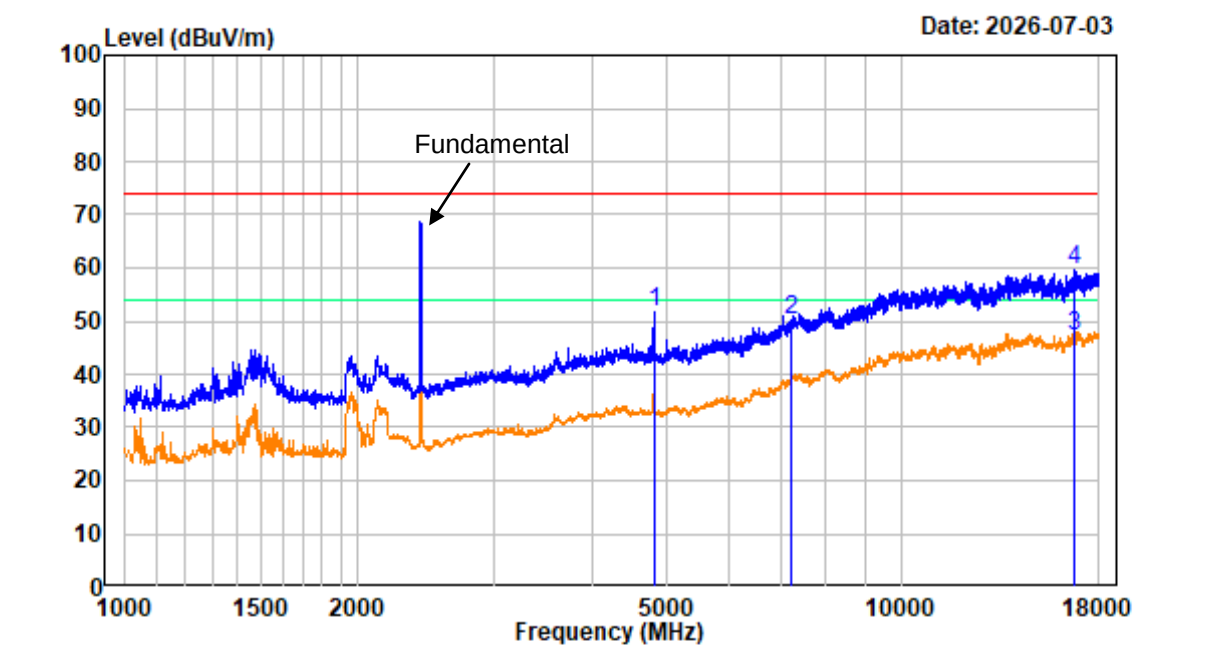

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Low Channel 2412MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	58.50	51.59	74.00	-22.41 Peak
2	7236.000	-1.57	51.62	50.05	74.00	-23.95 Peak
3	16752.630	7.70	39.46	47.16	54.00	-6.84 Average
4	16752.630	7.70	51.88	59.58	74.00	-14.42 Peak


2.4G WIFI 802.11b Low Channel Bandedge_HORIZONTAL

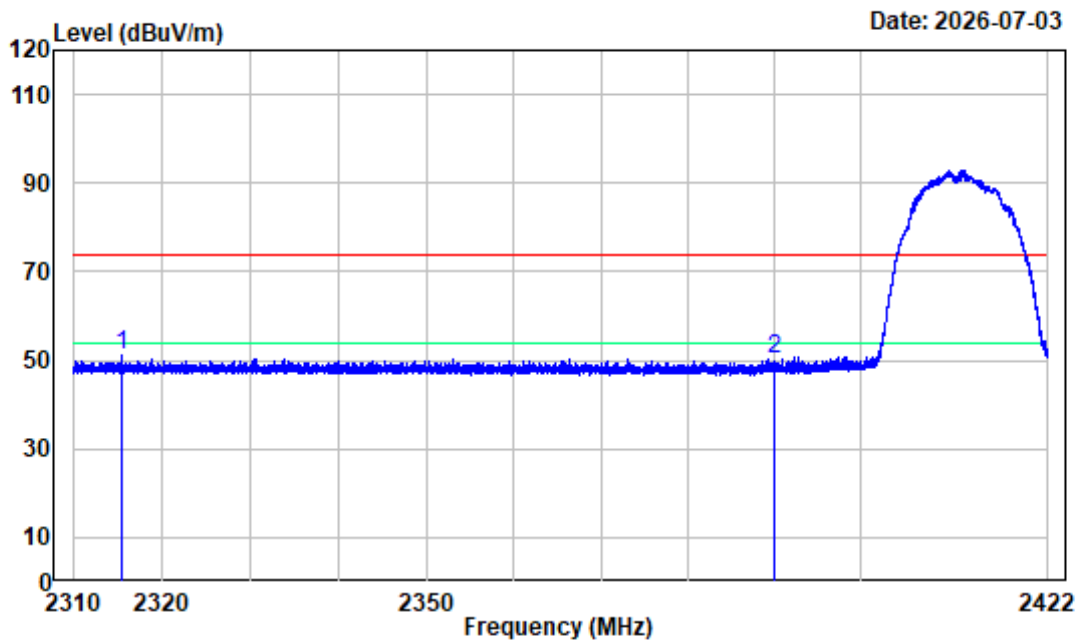

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2315.502	-10.44	61.68	51.24	74.00	-22.76 Peak
2	2390.000	-10.93	60.98	50.05	74.00	-23.95 Peak

2.4G WIFI 802.11b Low Channel Bandedge_VERTICAL

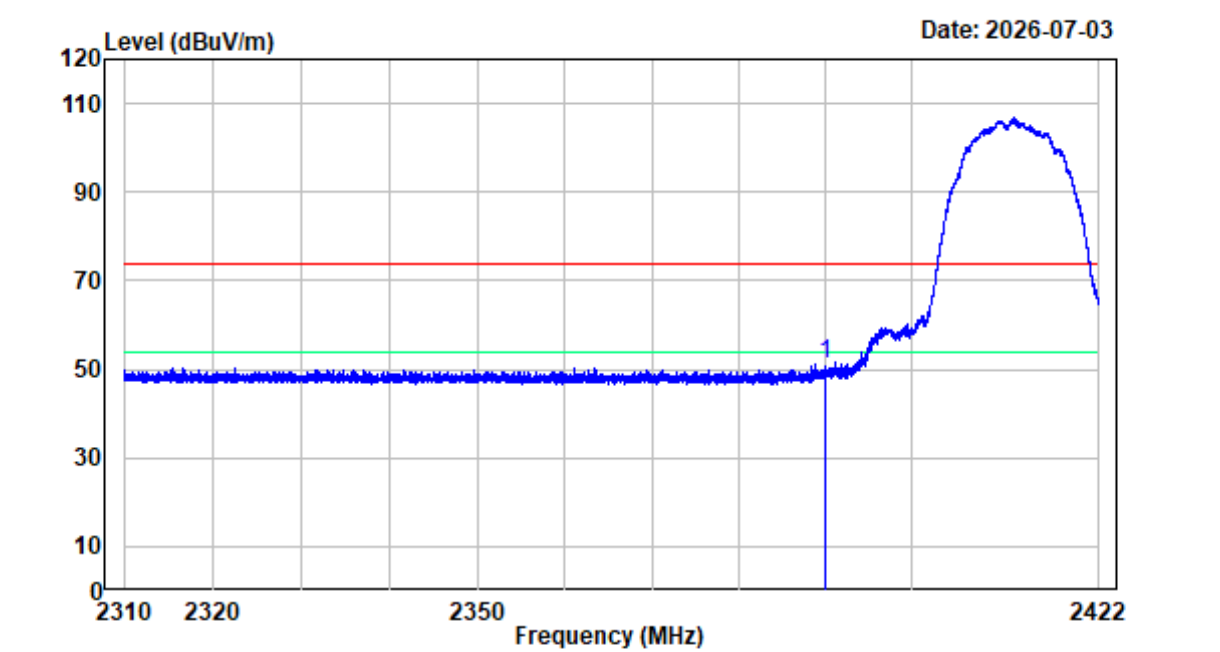

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11b Low Channel 2412MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.93	61.91	50.98	74.00	-23.02	Peak


2.4G WIFI 802.11b Middle Channel 1GHz-18GHz_HORIZONTAL

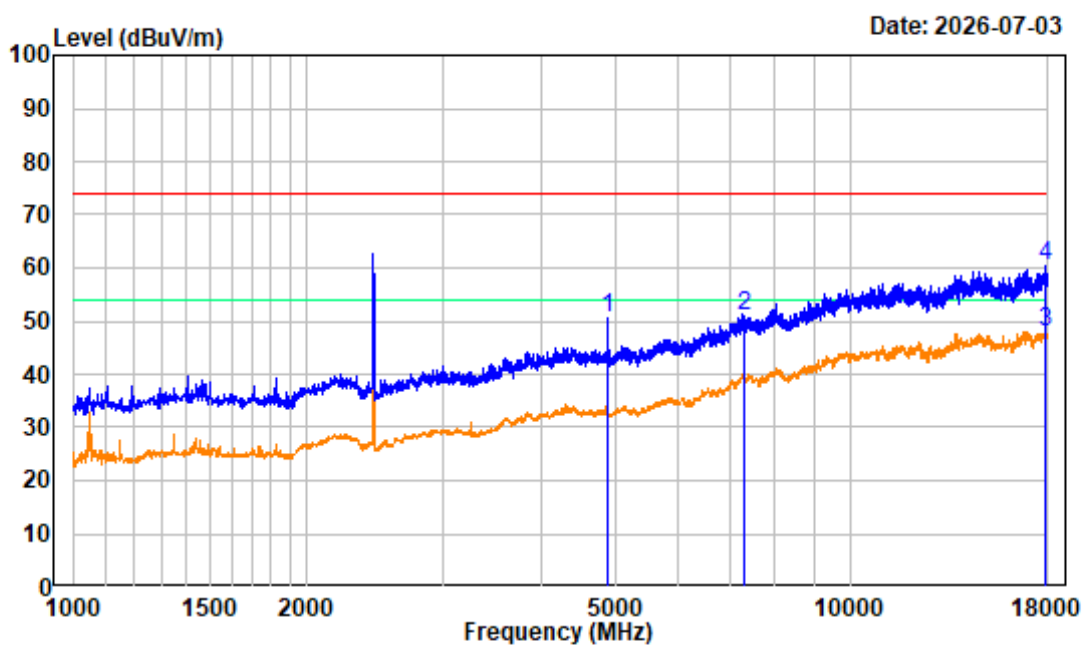

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	57.64	50.68	74.00	-23.32 Peak
2	7311.000	-1.24	52.19	50.95	74.00	-23.05 Peak
3	17827.880	7.20	40.66	47.86	54.00	-6.14 Average
4	17827.880	7.20	53.09	60.29	74.00	-13.71 Peak


2.4G WIFI 802.11b Middle Channel 1GHz-18GHz_VERTICAL

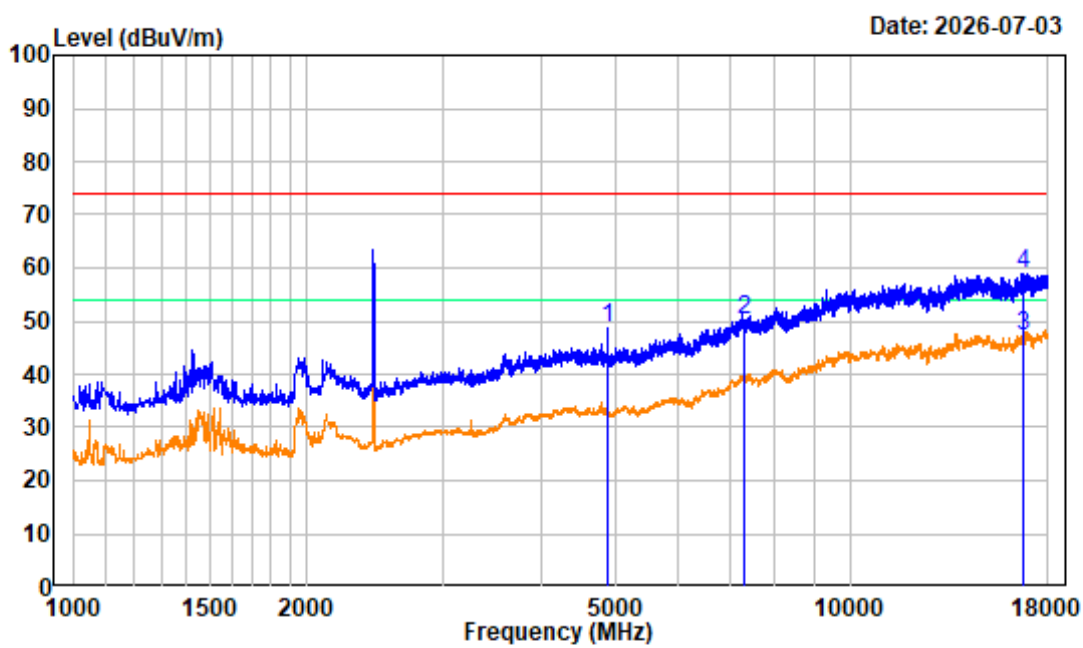

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	55.59	48.63	74.00	-25.37 Peak
2	7311.000	-1.24	51.61	50.37	74.00	-23.63 Peak
3	16737.750	7.60	39.63	47.23	54.00	-6.77 Average
4	16737.750	7.60	51.35	58.95	74.00	-15.05 Peak


2.4G WIFI 802.11b High Channel 1GHz-18GHz_HORIZONTAL

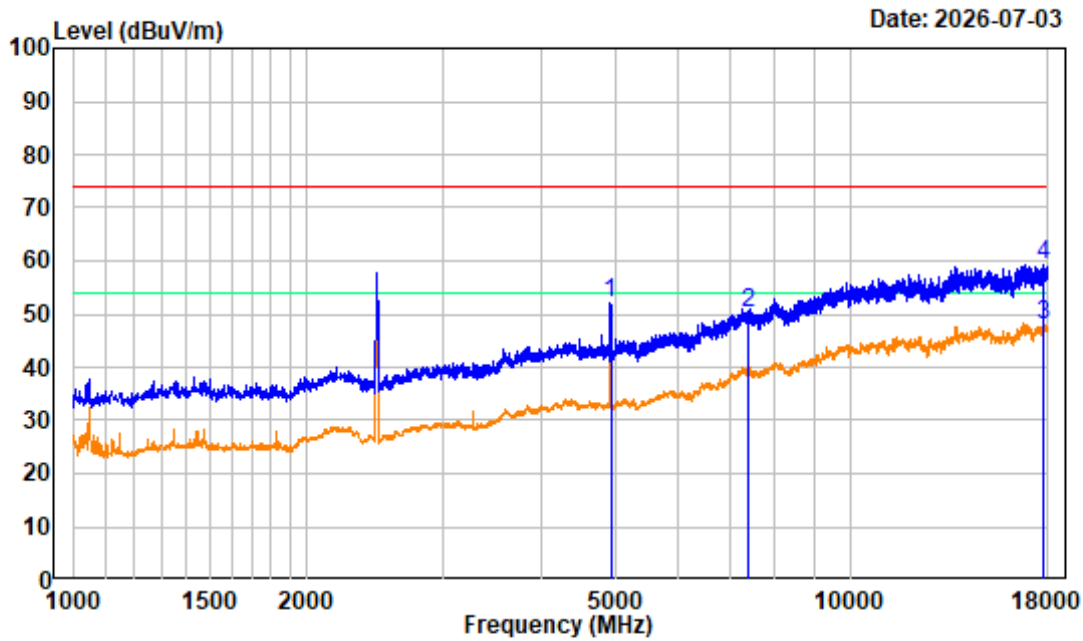

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.91	58.89	51.98	74.00	-22.02 Peak
2	7386.000	-1.15	51.18	50.03	74.00	-23.97 Peak
3	17808.750	7.22	40.55	47.77	54.00	-6.23 Average
4	17808.750	7.22	52.04	59.26	74.00	-14.74 Peak


2.4G WIFI 802.11b High Channel 1GHz-18GHz_VERTICAL

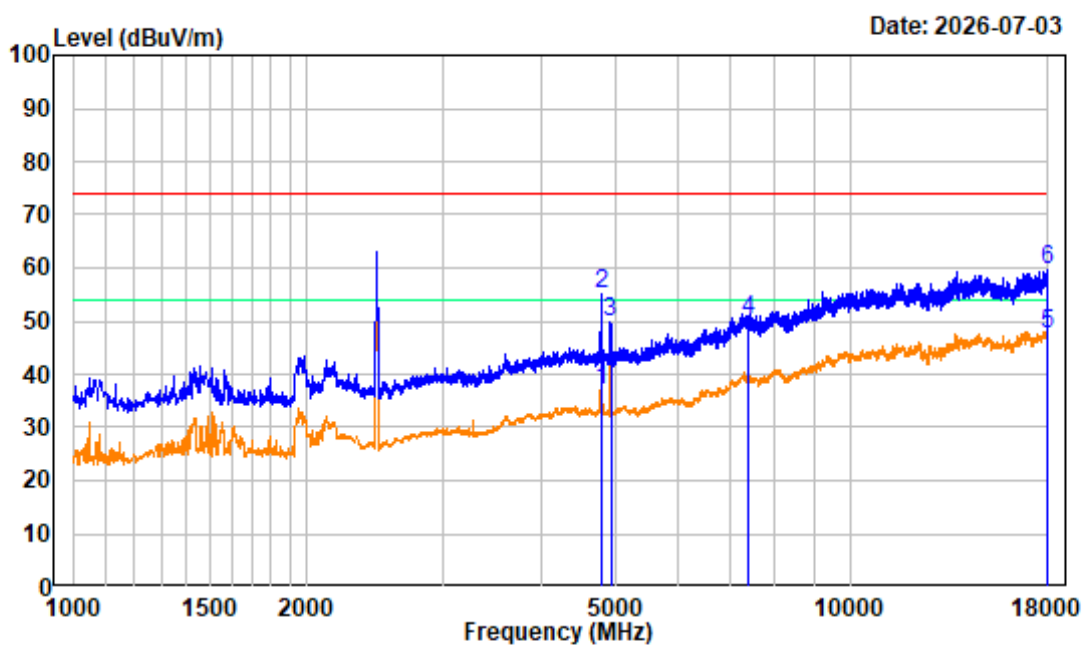

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4786.750	-6.96	43.78	36.82	54.00	-17.18 Average
2	4786.750	-6.96	62.13	55.17	74.00	-18.83 Peak
3	4924.000	-6.91	56.88	49.97	74.00	-24.03 Peak
4	7386.000	-1.15	51.45	50.30	74.00	-23.70 Peak
5	17955.380	7.48	39.96	47.44	54.00	-6.56 Average
6	17955.380	7.48	51.97	59.45	74.00	-14.55 Peak

2.4G WIFI 802.11b High Channel Bandedge_HORIZONTAL

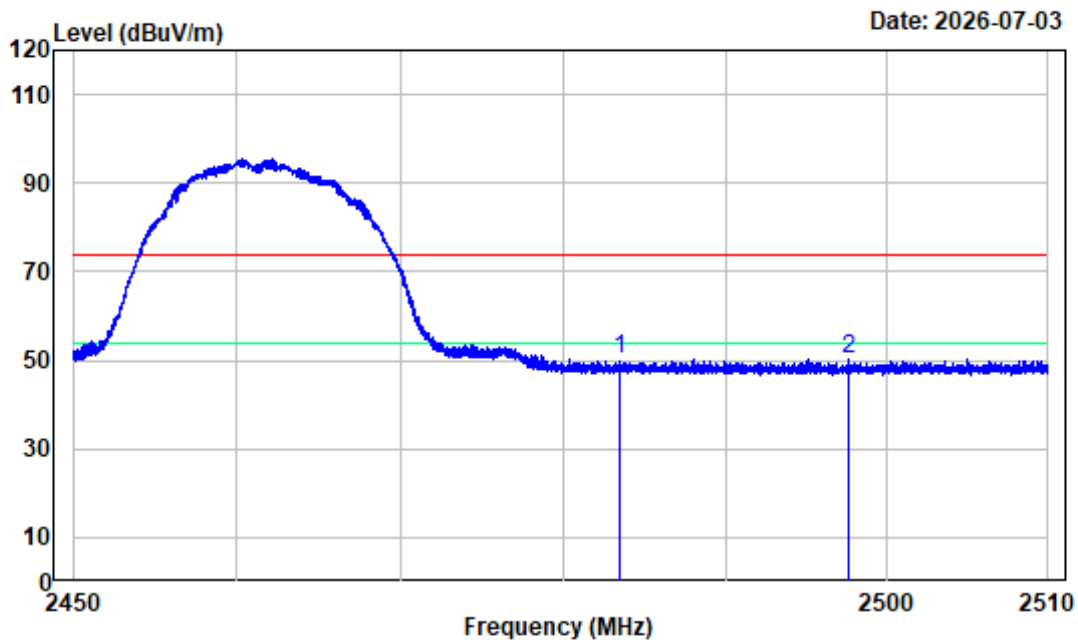

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11b High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2483.500 -10.97	61.07	50.10	74.00	-23.90	Peak
2	2497.558 -11.00	61.47	50.47	74.00	-23.53	Peak


2.4G WIFI 802.11b High Channel Bandedge_VERTICAL

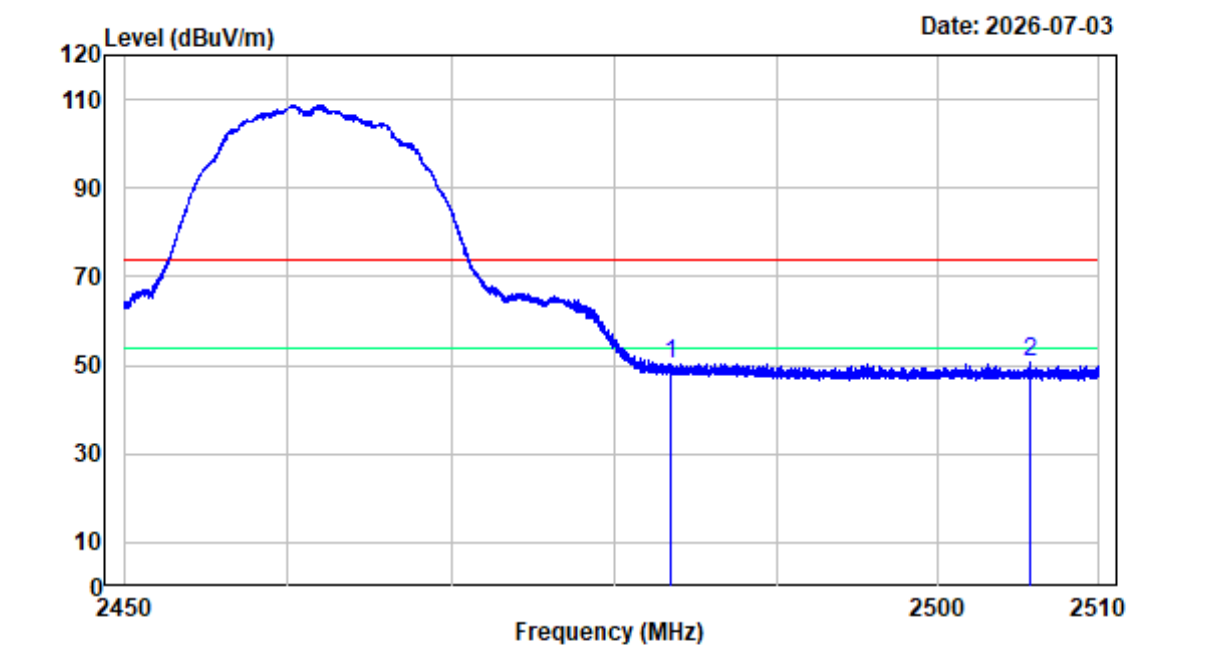

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11b High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	61.43	50.46	74.00	-23.54 Peak
2	2505.665	-10.98	61.62	50.64	74.00	-23.36 Peak

2.4G WIFI 802.11g Low Channel 1GHz-18GHz_HORIZONTAL

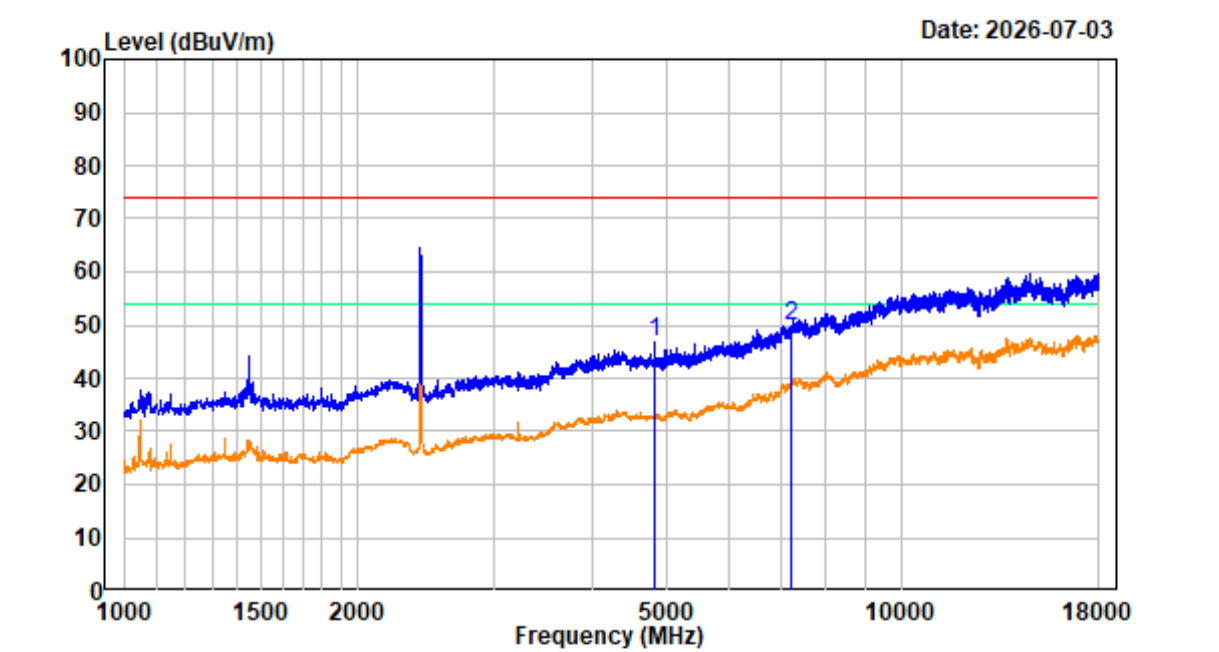

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4824.000	-6.91	53.59	46.68	74.00	-27.32 Peak
2	7236.000	-1.57	51.52	49.95	74.00	-24.05 Peak

2.4G WIFI 802.11g Low Channel 1GHz-18GHz_VERTICAL

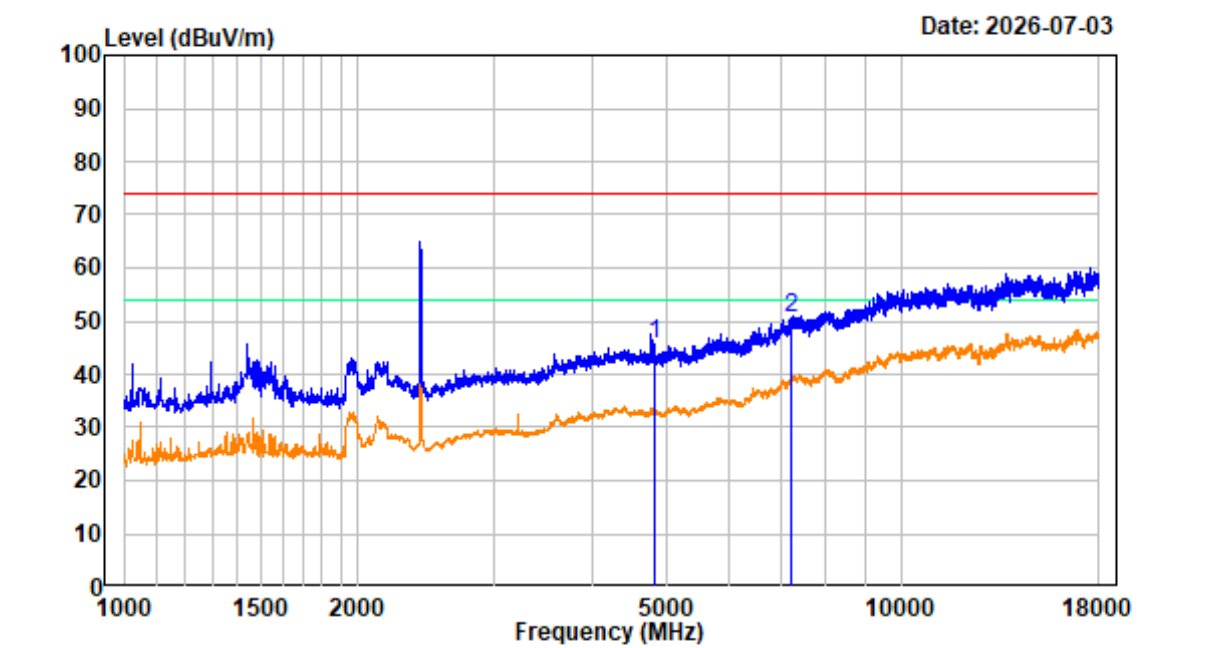

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4824.000	-6.91	52.69	45.78	74.00	-28.22 Peak
2	7236.000	-1.57	52.16	50.59	74.00	-23.41 Peak


2.4G WIFI 802.11g Low Channel 18GHz-25GHz_HORIZONTAL

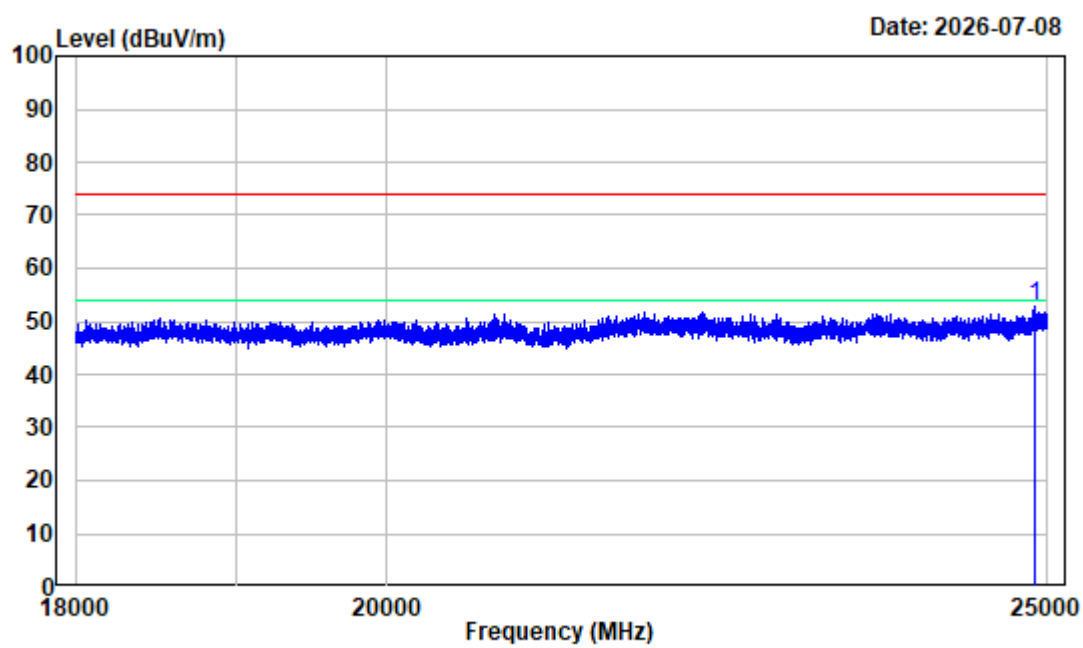

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24887.130	4.06	48.66	52.72	74.00	-21.28	Peak


2.4G WIFI 802.11g Low Channel 18GHz-25GHz_VERTICAL

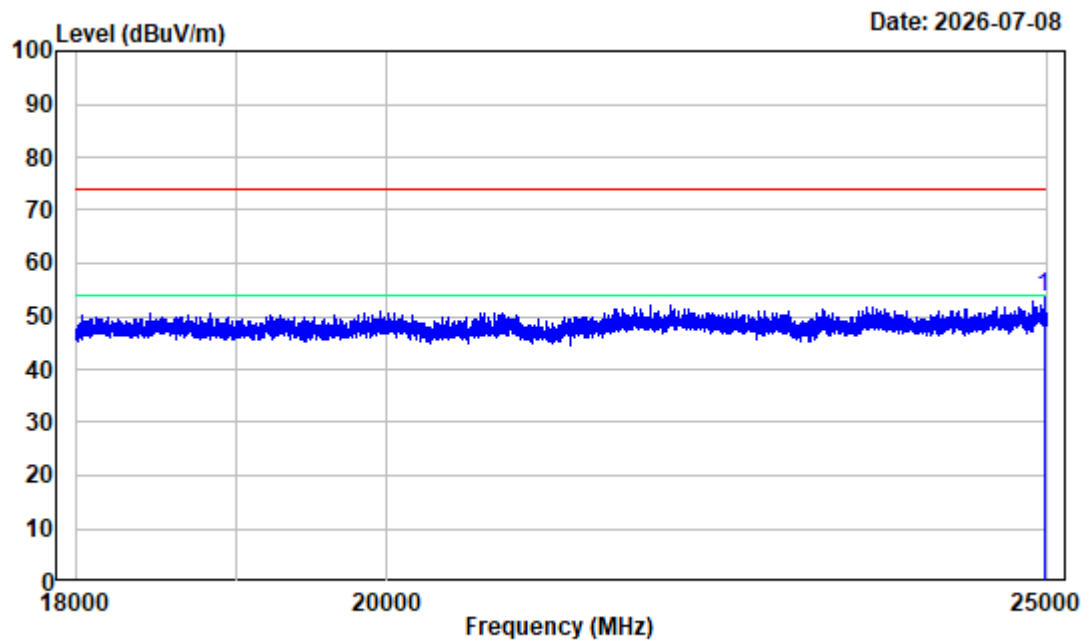

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24970.250	4.26	49.48	53.74	74.00	-20.26	Peak

2.4G WIFI 802.11g Low Channel Bandedge_HORIZONTAL

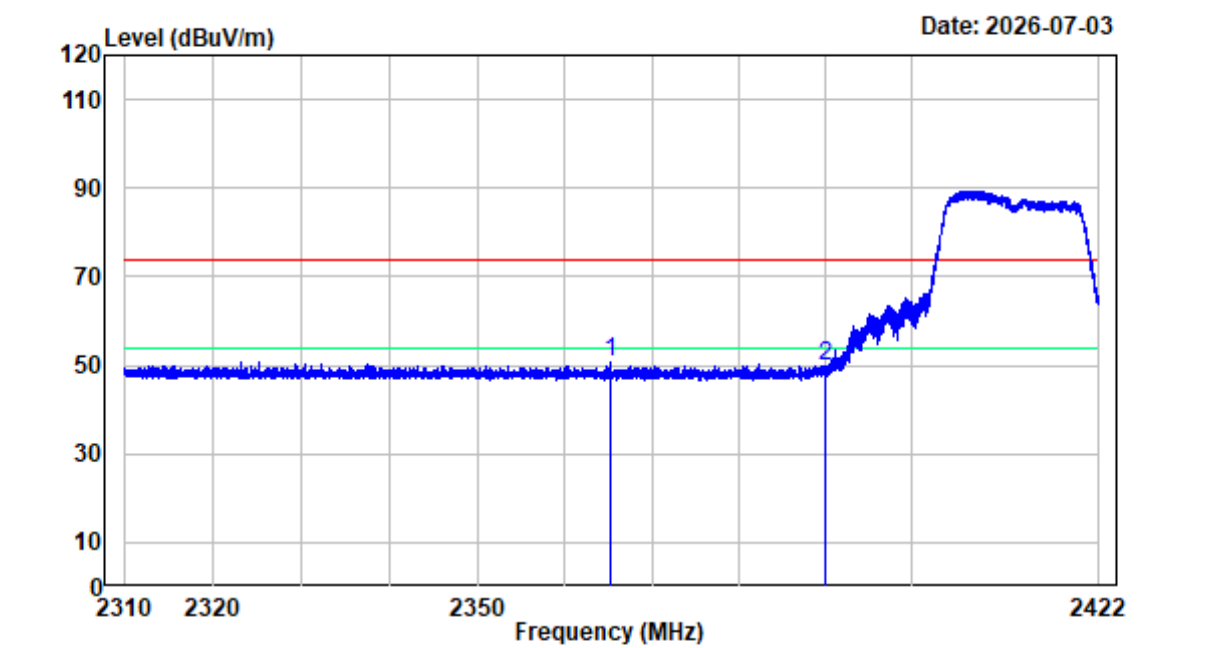

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g Low Channel 2412MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2365.216	-10.74	61.41	50.67	74.00	-23.33 Peak
2	2390.000	-10.93	60.86	49.93	74.00	-24.07 Peak

2.4G WIFI 802.11g Low Channel Bandedge_VERTICAL

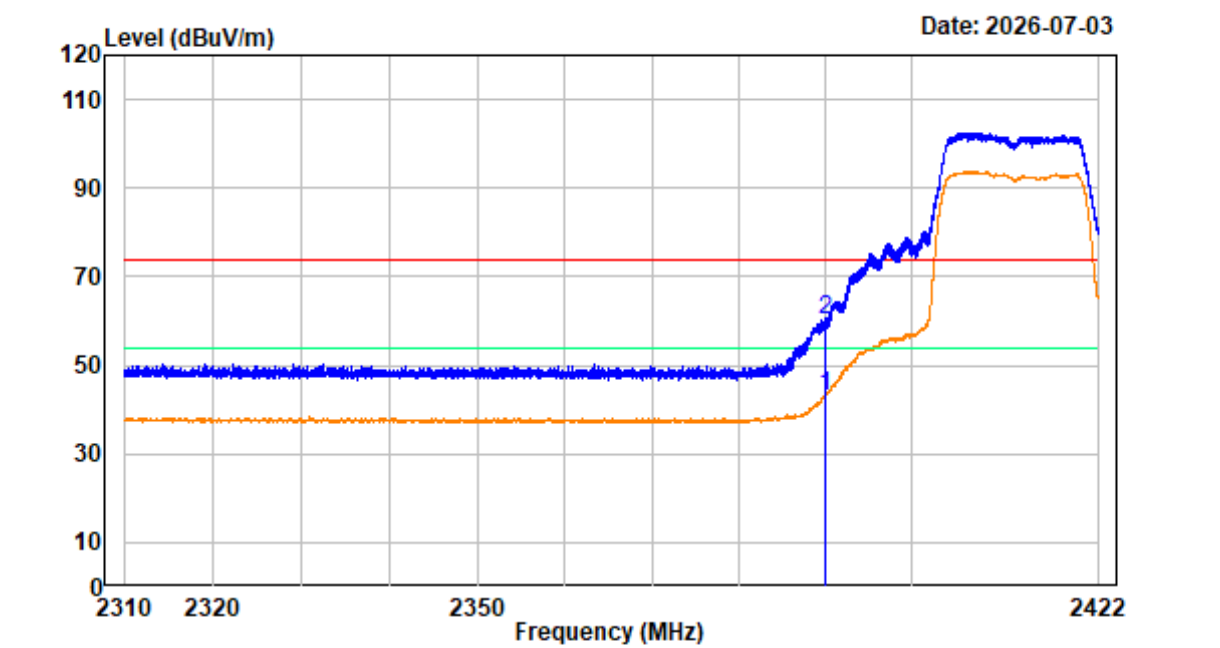

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g Low Channel 2412MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	53.83	42.90	54.00	-11.10 Average
2	2390.000	-10.93	71.10	60.17	74.00	-13.83 Peak


2.4G WIFI 802.11g Middle Channel 1GHz-18GHz_HORIZONTAL

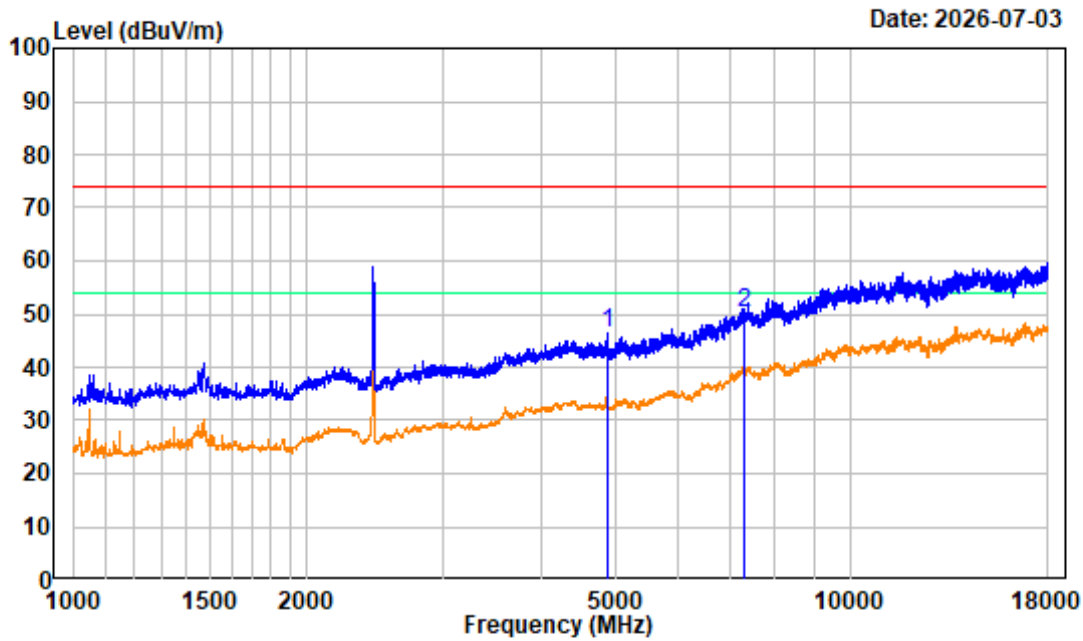

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	53.27	46.31	74.00	-27.69 Peak
2	7311.000	-1.24	51.40	50.16	74.00	-23.84 Peak


2.4G WIFI 802.11g Middle Channel 1GHz-18GHz_VERTICAL

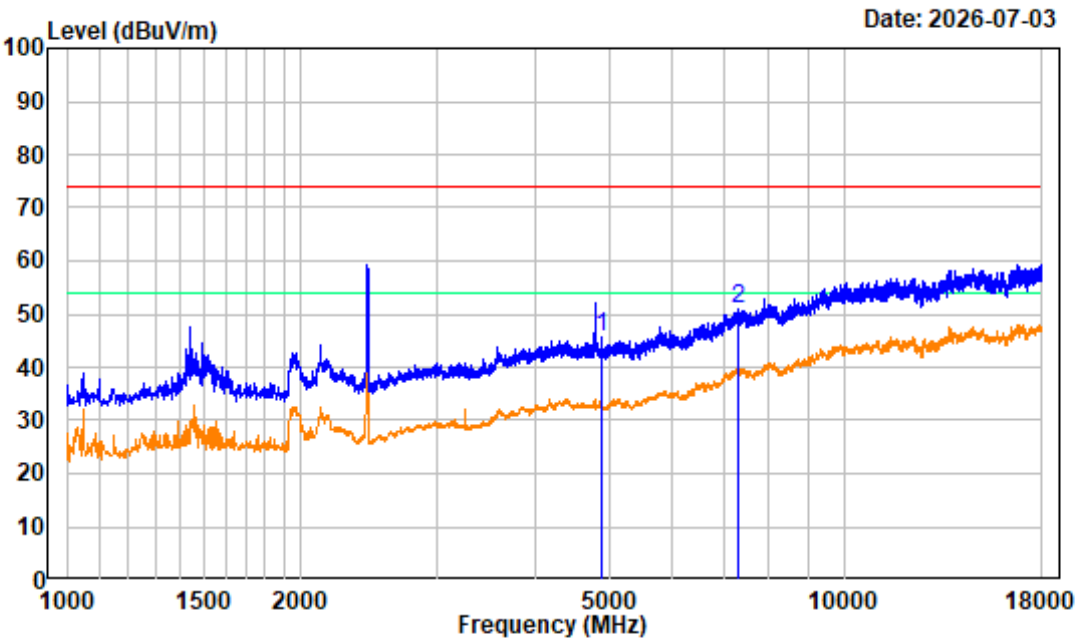

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	52.50	45.54	74.00	-28.46 Peak
2	7311.000	-1.24	52.28	51.04	74.00	-22.96 Peak


2.4G WIFI 802.11g High Channel 1GHz-18GHz_HORIZONTAL

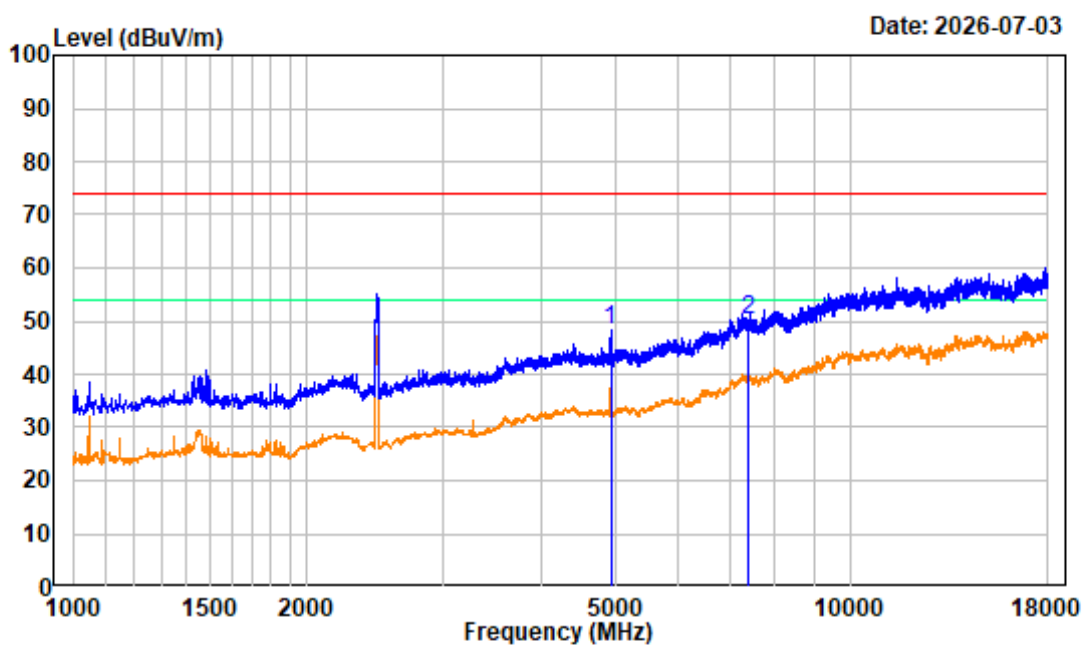

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	-6.91	55.04	48.13	74.00	-25.87	Peak
2	-1.15	51.21	50.06	74.00	-23.94	Peak


2.4G WIFI 802.11g High Channel 1GHz-18GHz_VERTICAL

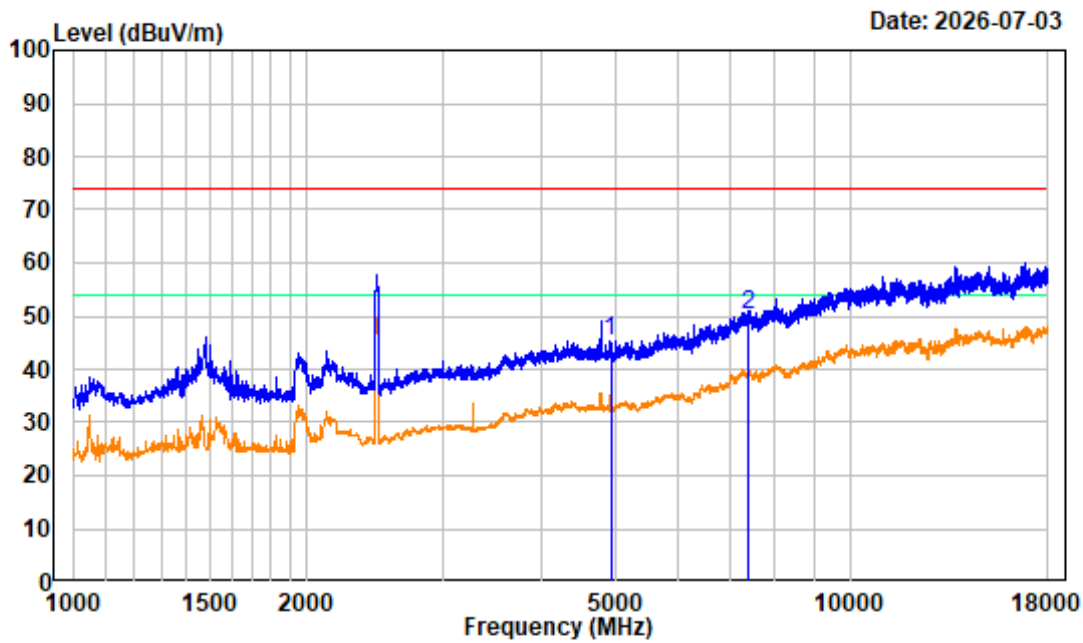

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4924.000	-6.91	52.25	45.34	74.00	-28.66 Peak
2	7386.000	-1.15	51.46	50.31	74.00	-23.69 Peak

2.4G WIFI 802.11g High Channel Bandedge_HORIZONTAL

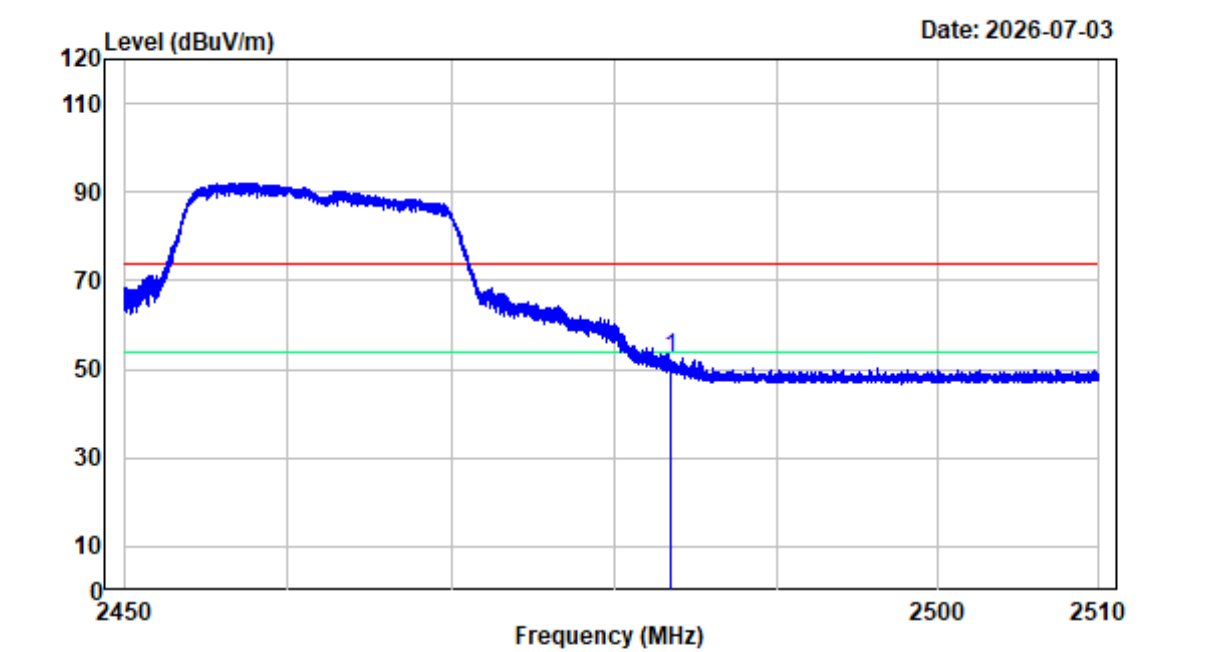

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g High Channel 2462MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	63.33	52.36	74.00	-21.64 Peak


2.4G WIFI 802.11g High Channel Bandedge_VERTICAL

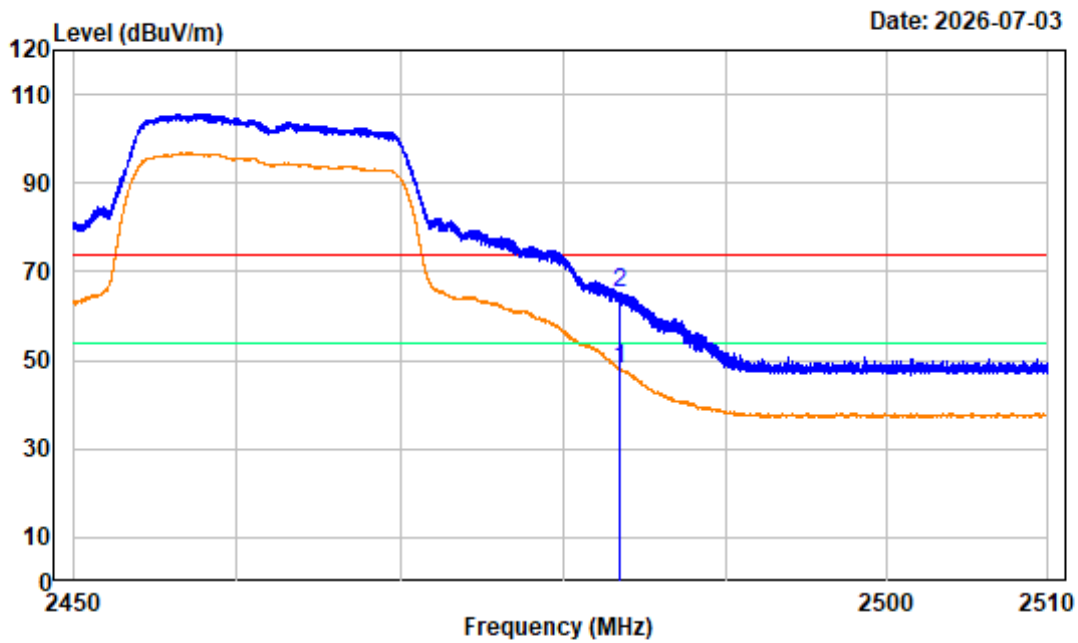

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2483.500 -10.97	58.85	47.88	54.00	-6.12	Average
2	2483.500 -10.97	76.02	65.05	74.00	-8.95	Peak


2.4G WIFI 802.11n20 Low Channel 1GHz-18GHz_HORIZONTAL

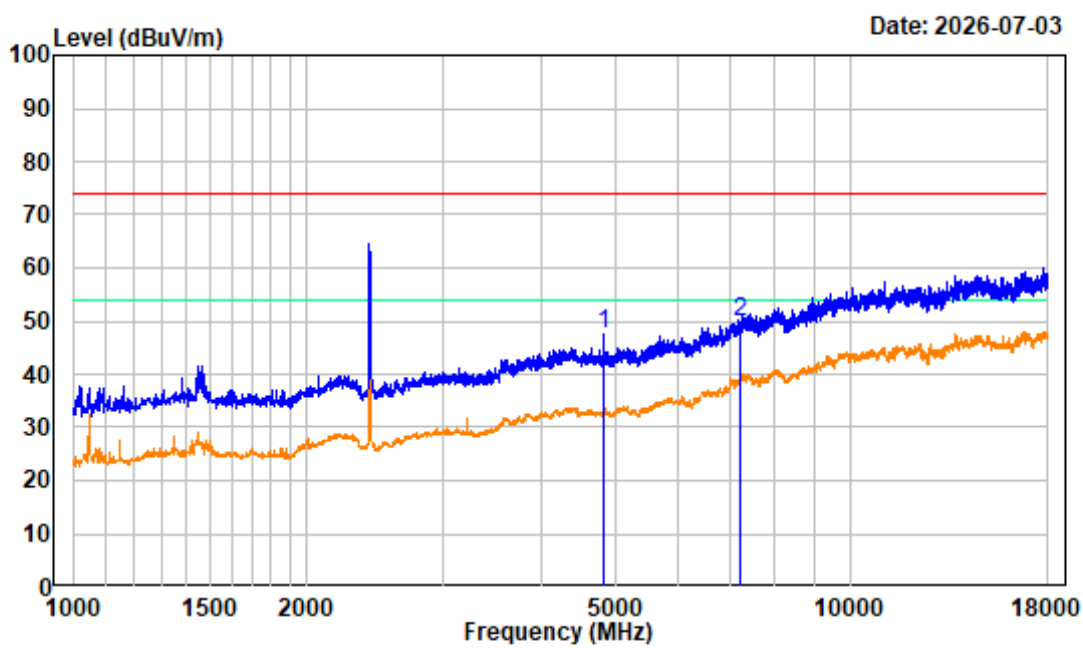

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	54.47	47.56	74.00	-26.44 Peak
2	7236.000	-1.57	51.29	49.72	74.00	-24.28 Peak


2.4G WIFI 802.11n20 Low Channel 1GHz-18GHz_VERTICAL

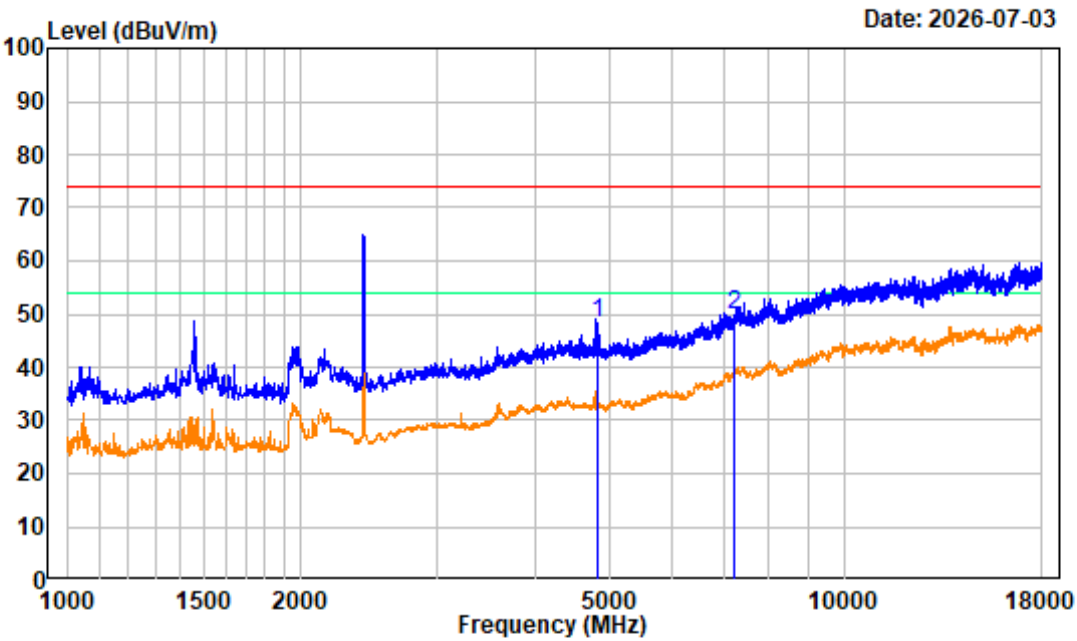

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4824.000	-6.91	55.07	48.16	74.00	-25.84	Peak
2 7236.000	-1.57	51.46	49.89	74.00	-24.11	Peak


2.4G WIFI 802.11n20 Low Channel Bandedge_HORIZONTAL

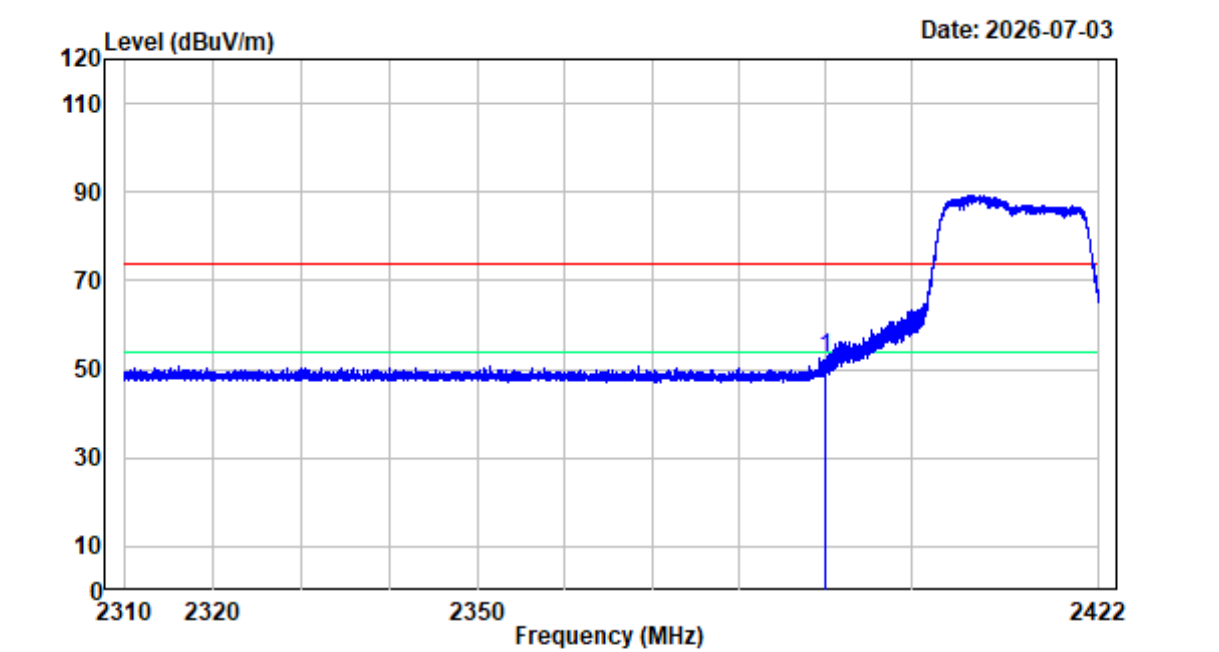

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.93	63.26	52.33	74.00	-21.67	Peak


2.4G WIFI 802.11n20 Low Channel Bandedge_VERTICAL

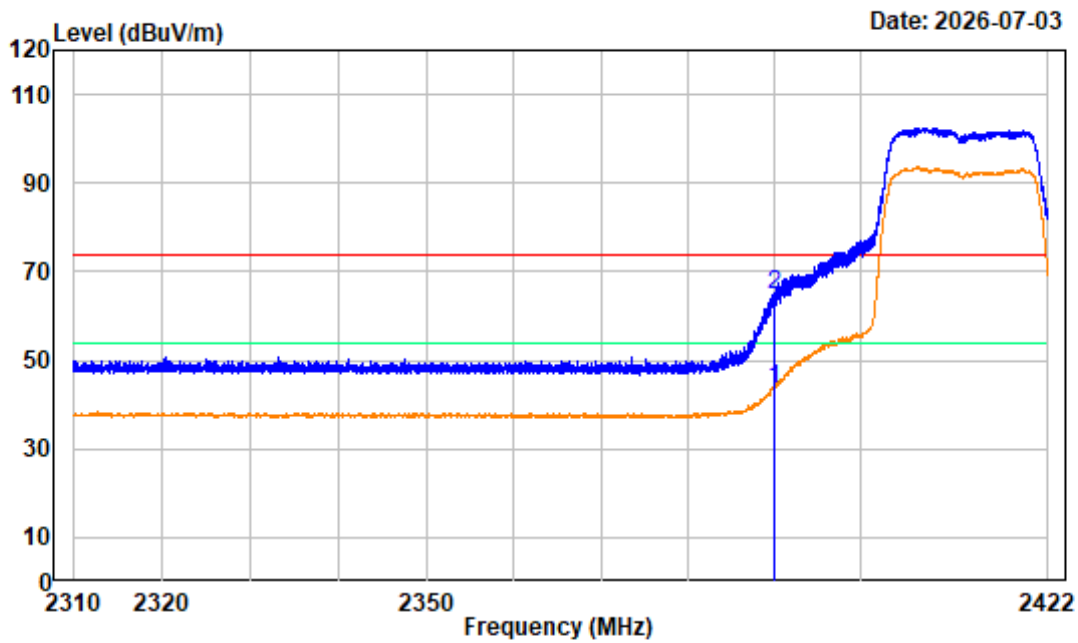

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Low Channel 2412MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	54.54	43.61	54.00	-10.39 Average
2	2390.000	-10.93	75.66	64.73	74.00	-9.27 Peak


2.4G WIFI 802.11n20 Middle Channel 1GHz-18GHz_HORIZONTAL

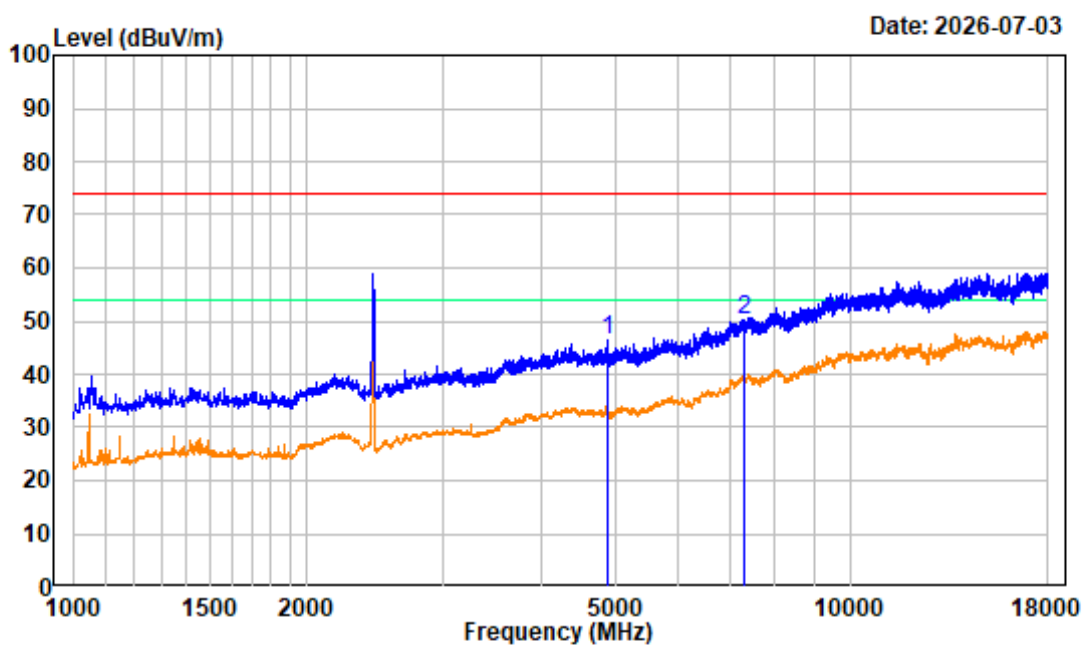

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	53.36	46.40	74.00	-27.60 Peak
2	7311.000	-1.24	51.61	50.37	74.00	-23.63 Peak


2.4G WIFI 802.11n20 Middle Channel 1GHz-18GHz_VERTICAL

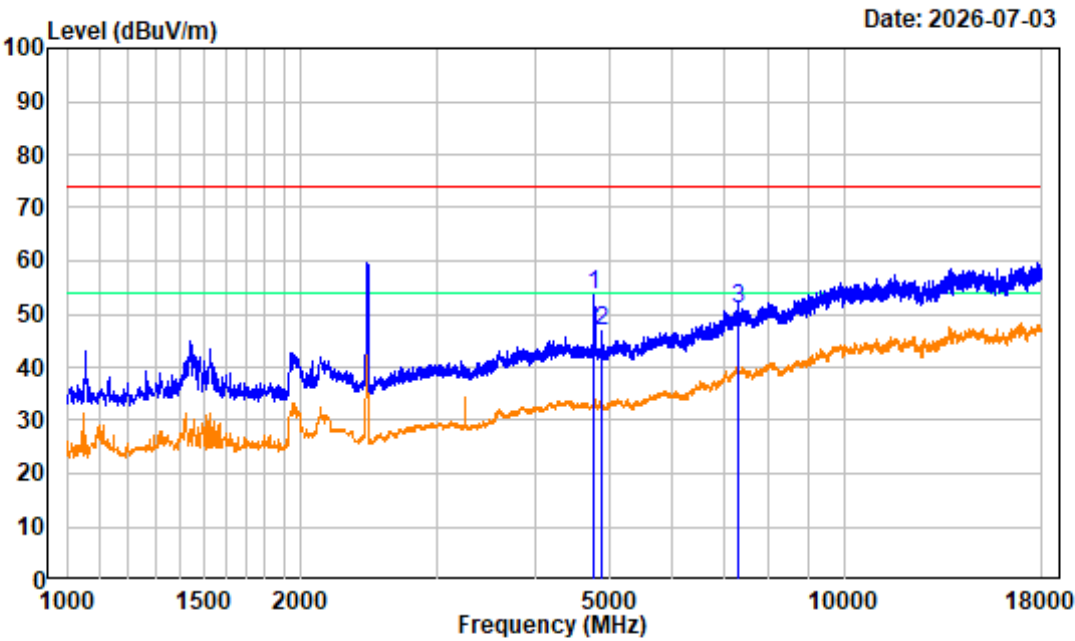

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4778.250	-6.95	60.43	53.48	74.00	-20.52 Peak
2	4874.000	-6.96	53.68	46.72	74.00	-27.28 Peak
3	7311.000	-1.24	52.08	50.84	74.00	-23.16 Peak


2.4G WIFI 802.11n20 High Channel 1GHz-18GHz_HORIZONTAL

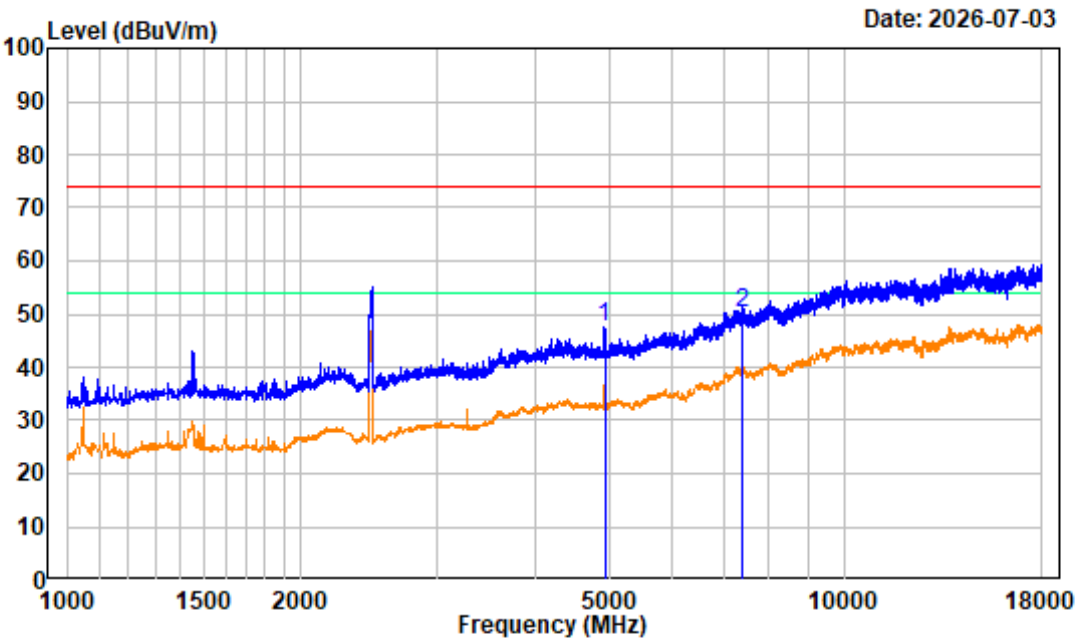

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	-6.91	54.39	47.48	74.00	-26.52	Peak
2	-1.15	51.32	50.17	74.00	-23.83	Peak


2.4G WIFI 802.11n20 High Channel 1GHz-18GHz_VERTICAL

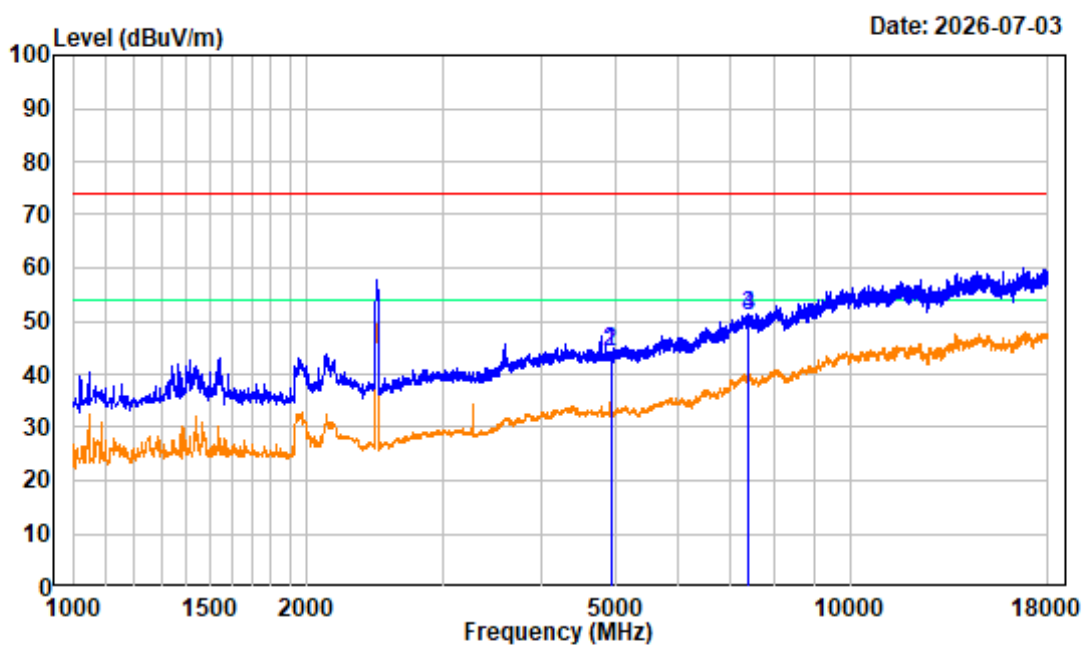

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 High Channel 2462MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.91	51.21	44.30	74.00	-29.70	Peak
2	4924.000	-6.91	51.21	44.30	74.00	-29.70	Peak
3	7386.000	-1.15	52.10	50.95	74.00	-23.05	Peak
4	7386.000	-1.15	52.10	50.95	74.00	-23.05	Peak


2.4G WIFI 802.11n20 High Channel Bandedge_HORIZONTAL

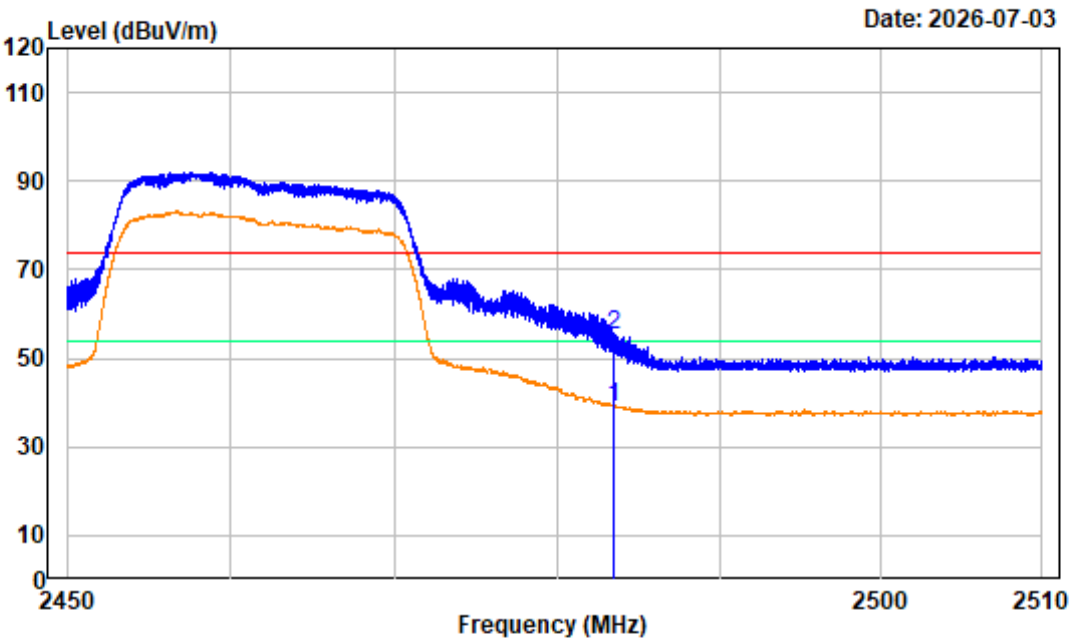

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	50.03	39.06	54.00	-14.94 Average
2	2483.500	-10.97	66.31	55.34	74.00	-18.66 Peak


2.4G WIFI 802.11n20 High Channel Bandedge_VERTICAL

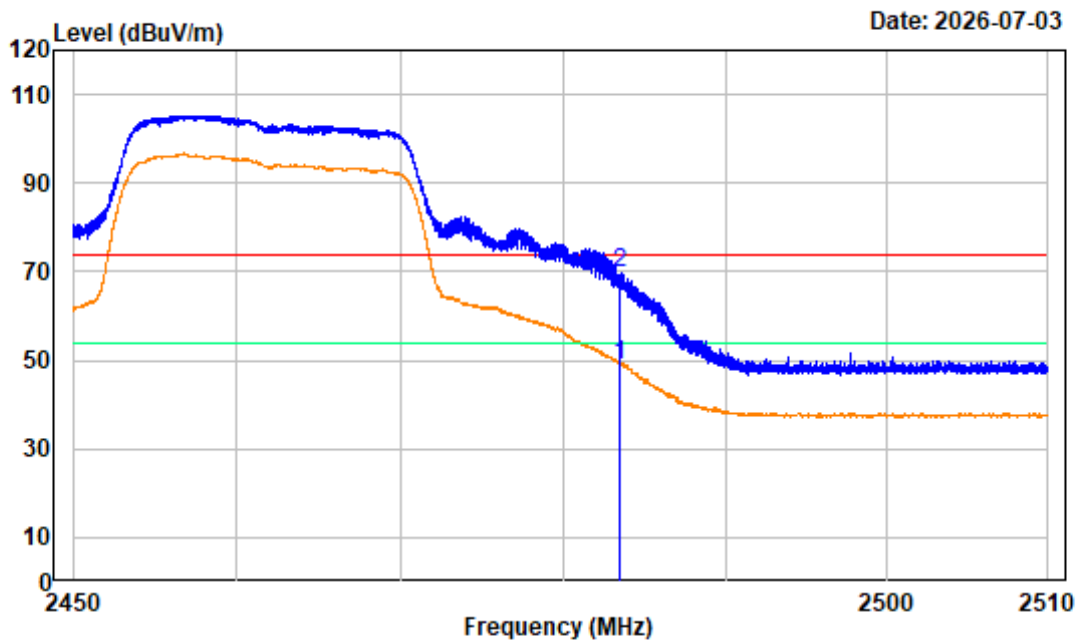

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n20 High Channel 2462MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2483.500 -10.97	60.05	49.08	54.00	-4.92	Average
2	2483.500 -10.97	80.58	69.61	74.00	-4.39	Peak


2.4G WIFI 802.11n40 Low Channel 1GHz-18GHz_HORIZONTAL

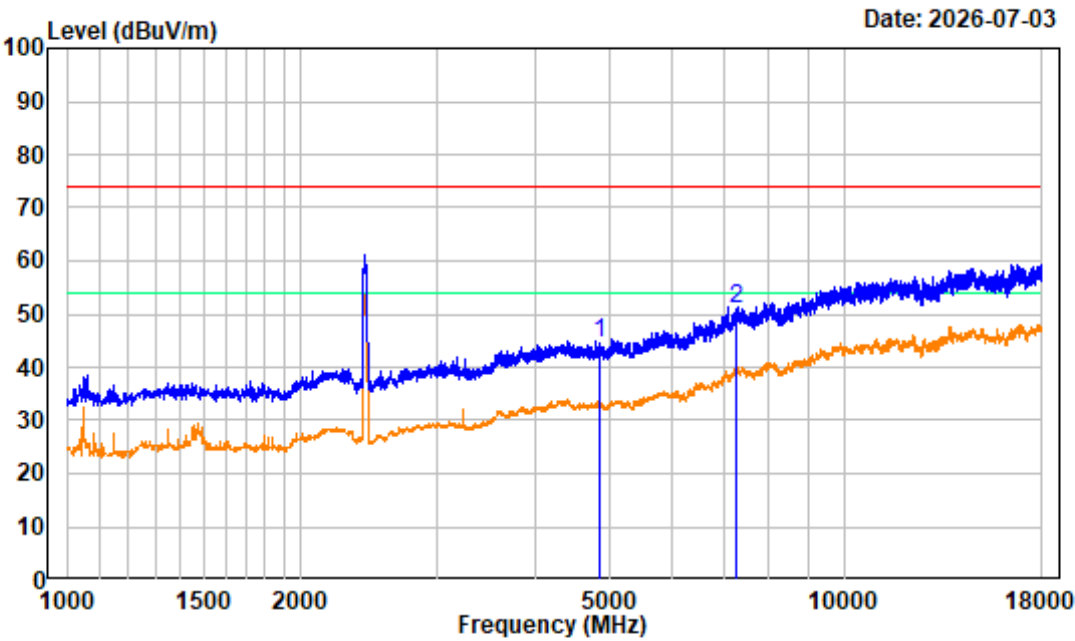

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4844.000	-6.88	51.31	44.43	74.00	-29.57 Peak
2	7266.000	-1.41	52.22	50.81	74.00	-23.19 Peak

2.4G WIFI 802.11n40 Low Channel 1GHz-18GHz_VERTICAL

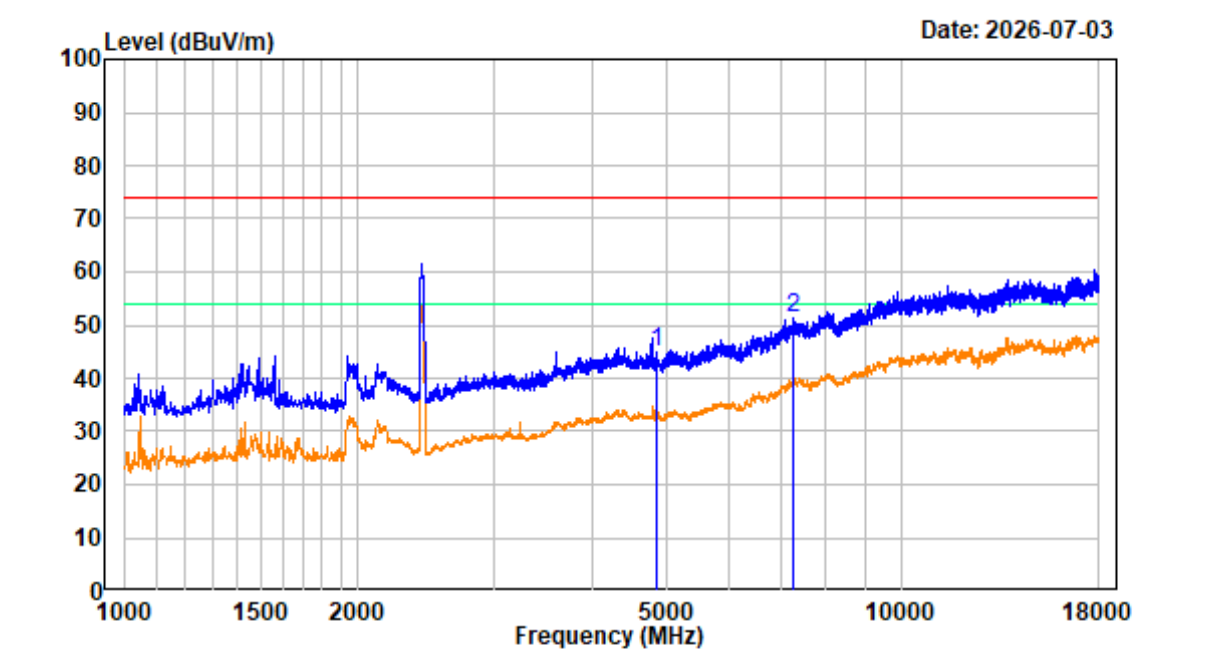

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF

Test Mode : Transmitting


Tester:Max Tao

Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4844.000	-6.88	51.93	45.05	74.00	-28.95 Peak
2	7266.000	-1.41	52.75	51.34	74.00	-22.66 Peak

2.4G WIFI 802.11n40 Low Channel Bandedge_HORIZONTAL

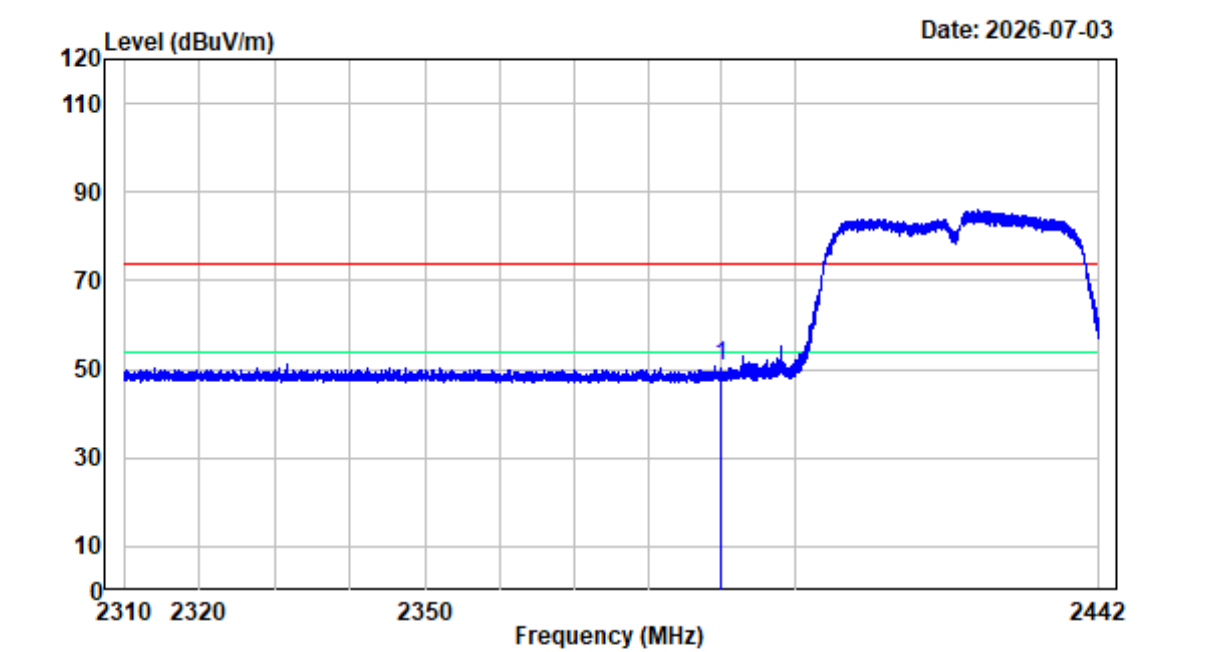

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.93	61.66	50.73	74.00	-23.27	Peak


2.4G WIFI 802.11n40 Low Channel Bandedge_VERTICAL

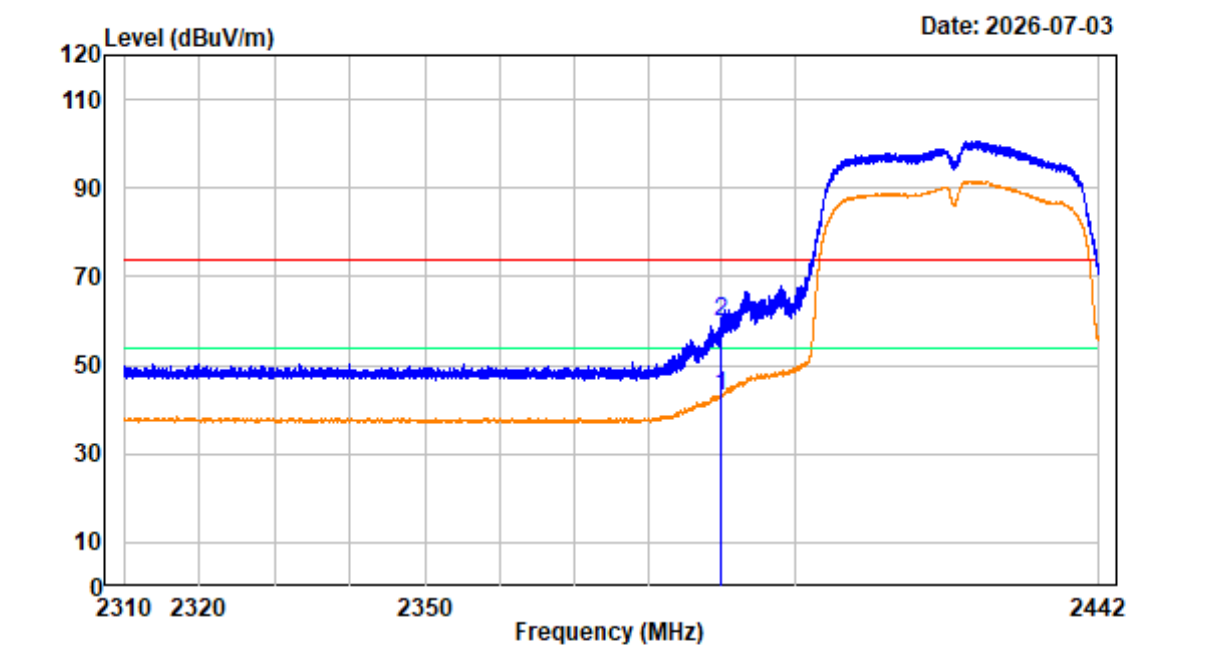

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Low Channel 2422MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	54.12	43.19	54.00	-10.81 Average
2	2390.000	-10.93	70.73	59.80	74.00	-14.20 Peak


2.4G WIFI 802.11n40 Middle Channel 1GHz-18GHz_HORIZONTAL

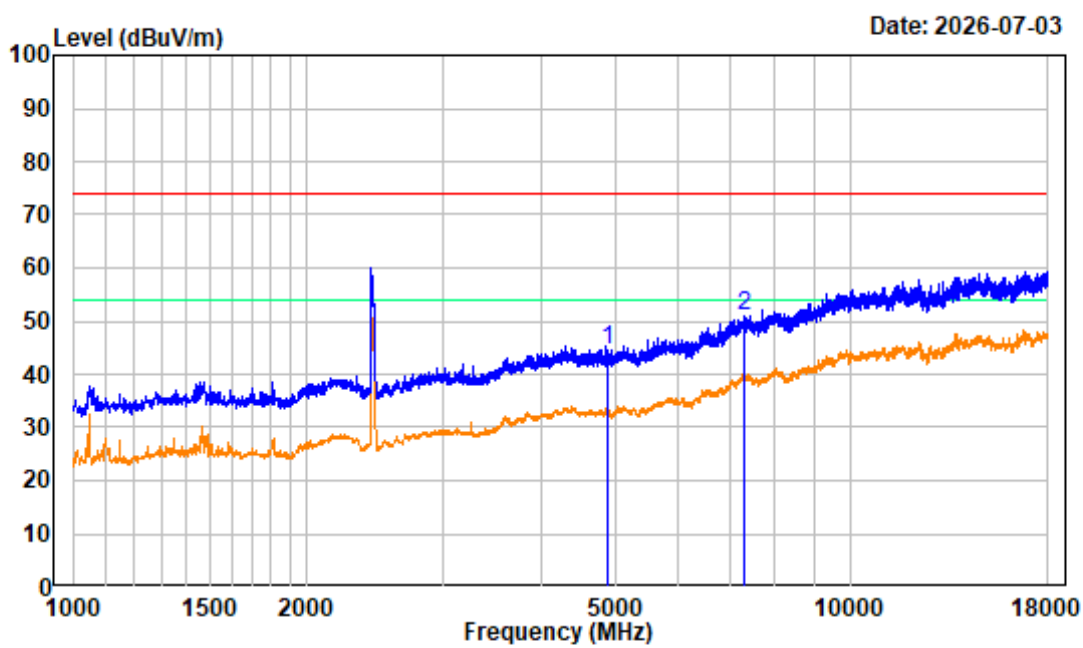

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	51.55	44.59	74.00	-29.41 Peak
2	7311.000	-1.24	52.09	50.85	74.00	-23.15 Peak


2.4G WIFI 802.11n40 Middle Channel 1GHz-18GHz_VERTICAL

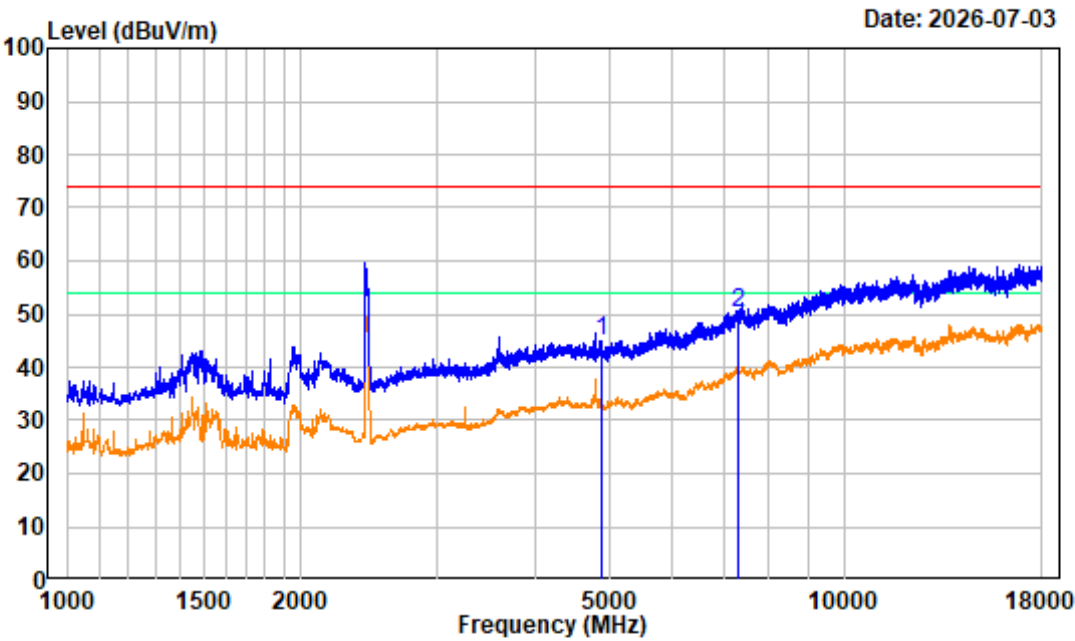

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 Middle Channel 2437MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.96	52.00	45.04	74.00	-28.96 Peak
2	7311.000	-1.24	51.42	50.18	74.00	-23.82 Peak


2.4G WIFI 802.11n40 High Channel 1GHz-18GHz_HORIZONTAL

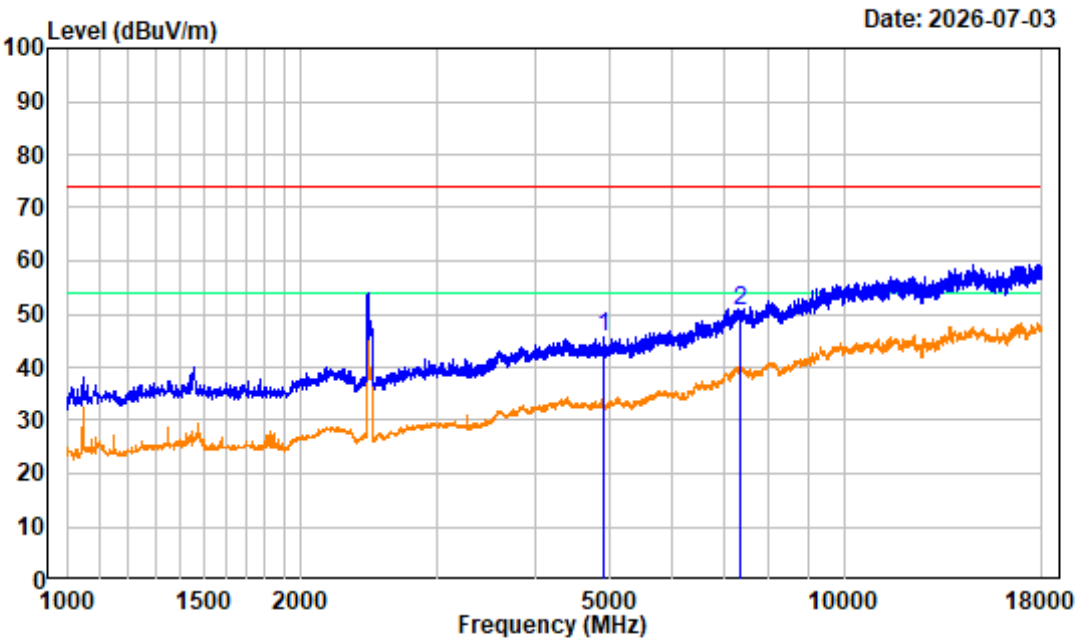

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 High Channel 2452MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	4904.000	-7.03	52.86	45.83	74.00	-28.17 peak
2	7356.000	-1.34	51.75	50.41	74.00	-23.59 peak


2.4G WIFI 802.11n40 High Channel 1GHz-18GHz_VERTICAL

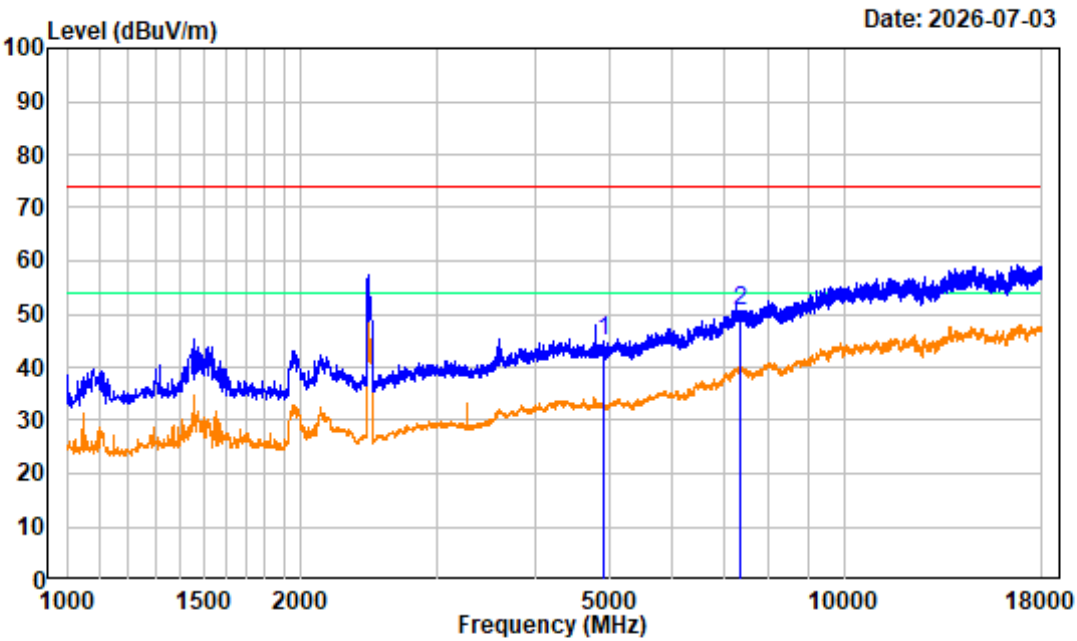

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11n40 High Channel 2452MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	-7.03	51.81	44.78	74.00	-29.22 peak
2	7356.000	-1.34	51.92	50.58	74.00	-23.42 peak

2.4G WIFI 802.11n40 High Channel Bandedge_HORIZONTAL

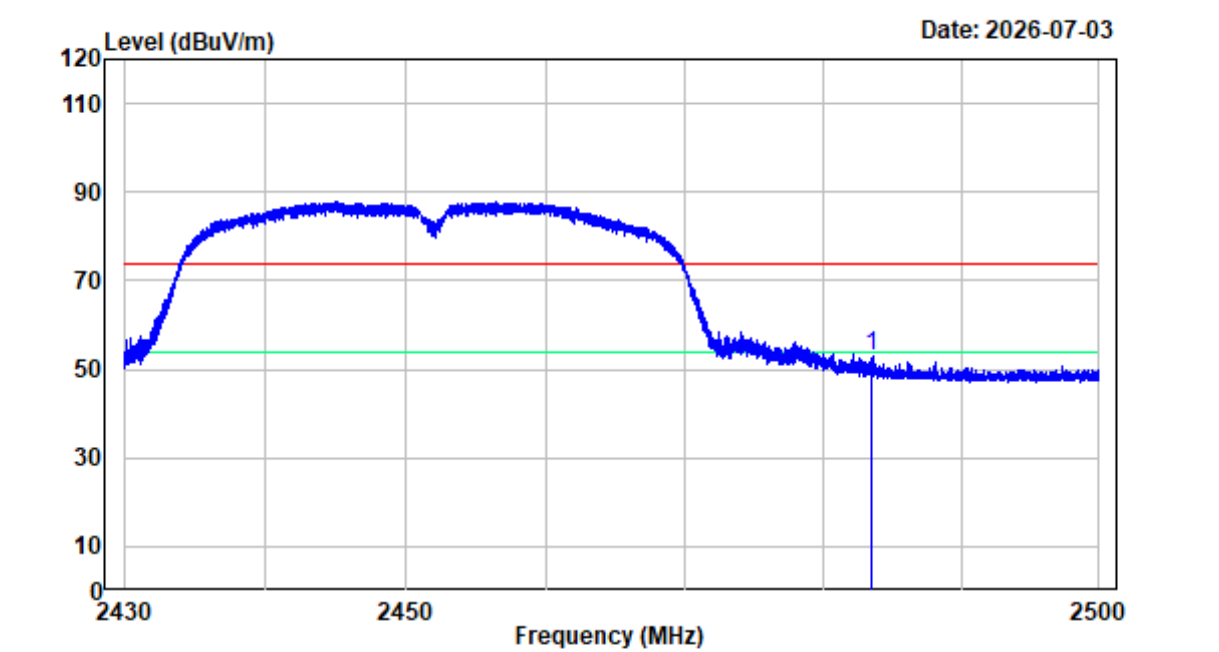

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11n40 High Channel 2452MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	63.91	52.94	74.00	-21.06 Peak

2.46 WIFI 802.11n40 High Channel Bandedge_VERTICAL

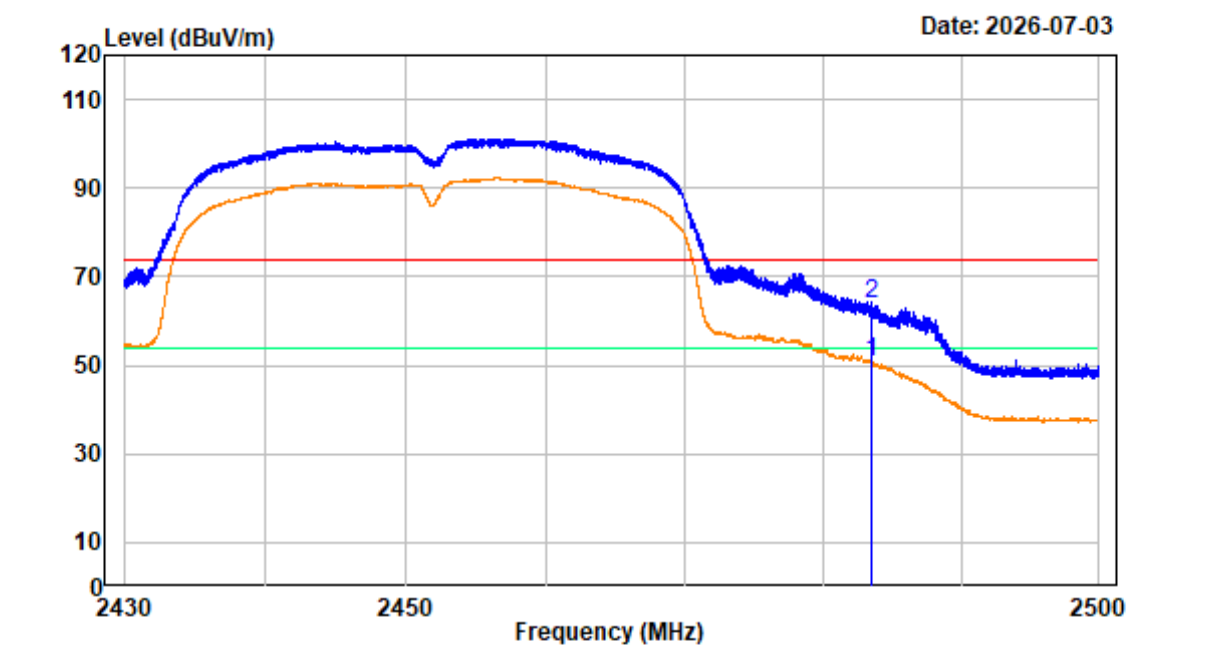

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF

Test Mode : TransmittingTester:Max Tao


Note : 2.4G WIFI 802.11n40 High Channel 2452MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	61.51	50.54	54.00	-3.46	Average
2	2483.500	-10.97	74.72	63.75	74.00	-10.25	Peak

For Simultaneous Transmission: 802.11g ANT1 Low Channel + AWS Band Downlink 2132.5MHz


1GHz-4GHz_HORIZONTAL

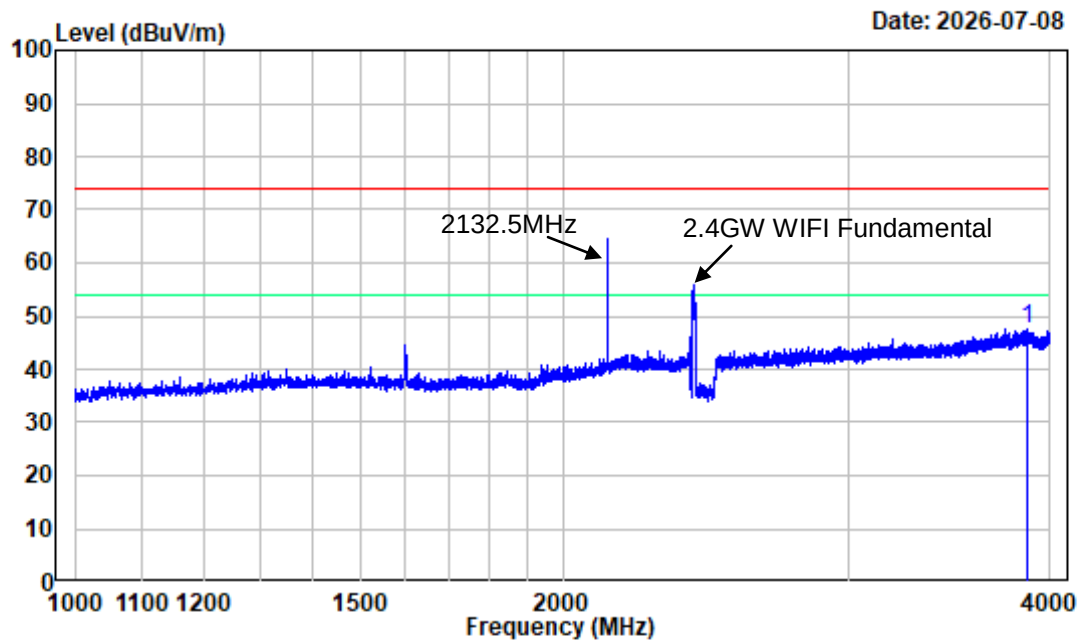

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3876.250	-8.20	55.86	47.66	74.00	-26.34	Peak

1GHz-4GHz_VERTICAL

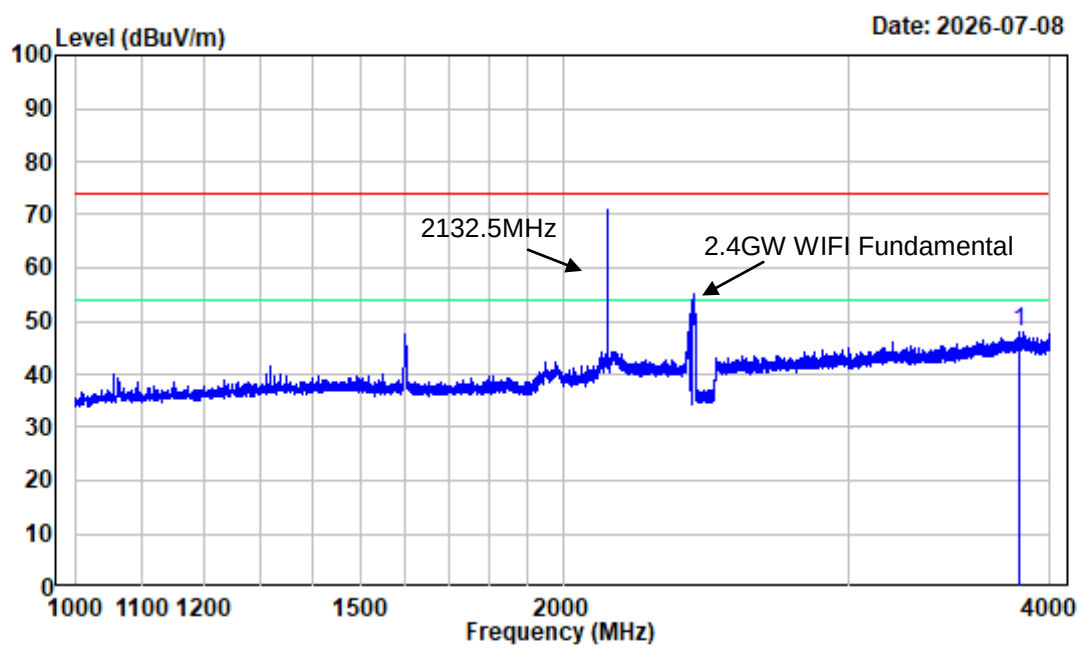

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604T01718E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G WIFI 802.11g Low Channel 2412MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	3830.500	-8.43	56.44	48.01	74.00	-25.99 Peak


4GHz-18GHz_HORIZONTAL

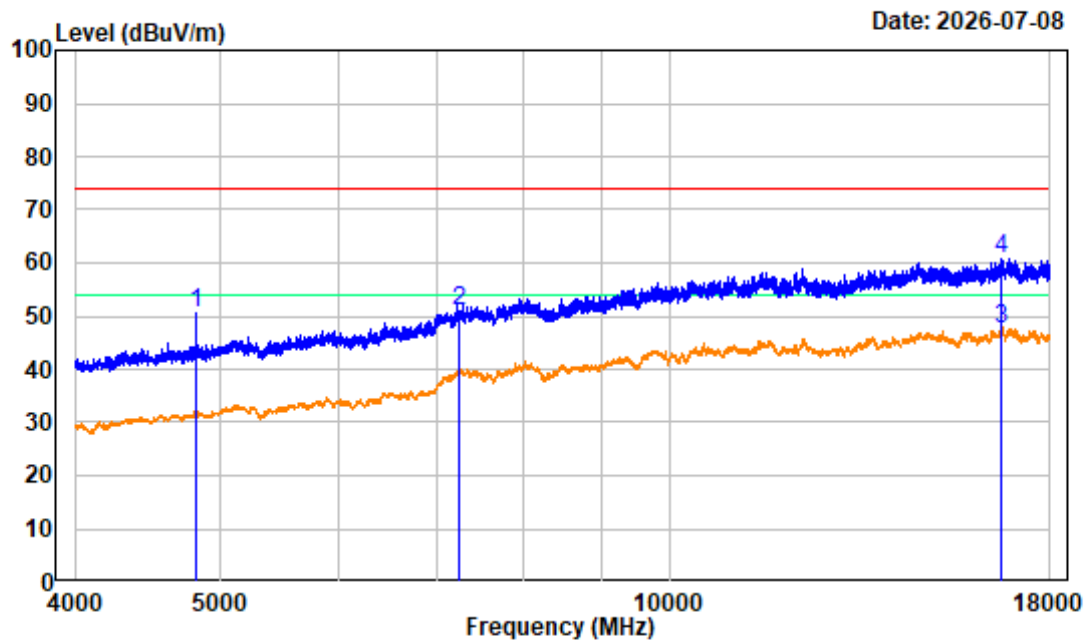

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read	Limit	Over	Remark	
MHz	dB/m	Level	Level	Line		
		dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.91	57.47	50.56	74.00	-23.44 Peak
2	7236.000	-1.57	52.53	50.96	74.00	-23.04 Peak
3	16692.750	6.99	40.63	47.62	54.00	-6.38 Average
4	16692.750	6.99	53.74	60.73	74.00	-13.27 Peak


4GHz-18GHz_VERTICAL

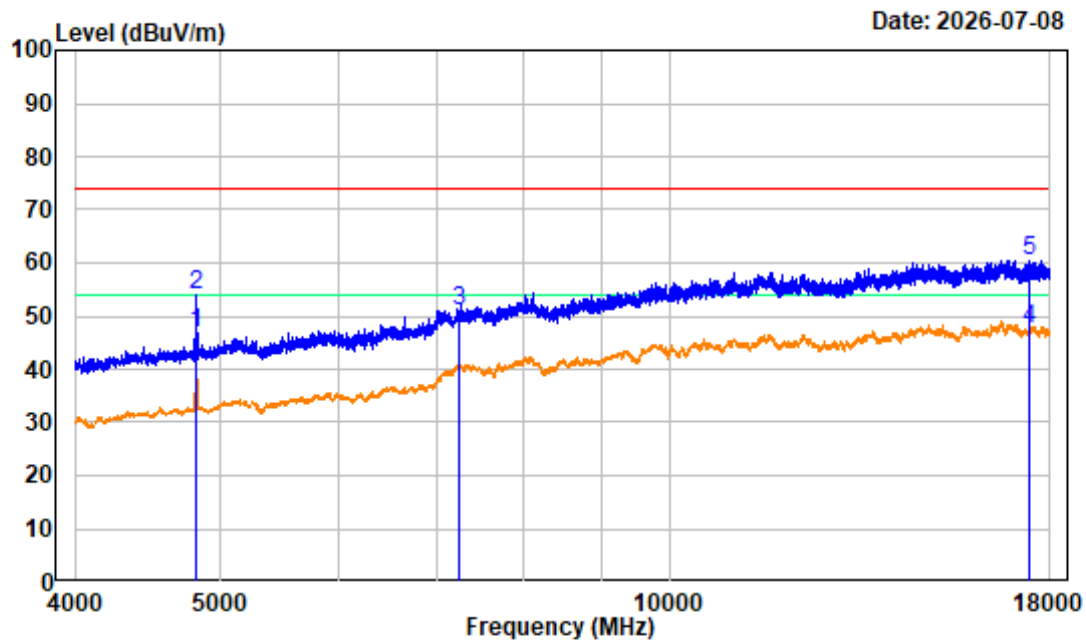

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G WIFI 802.11g Low Channel 2412MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4824.000	-6.91	53.78	46.87	54.00	-7.13	Average
2 4824.000	-6.91	60.93	54.02	74.00	-19.98	Peak
3 7236.000	-1.57	52.48	50.91	74.00	-23.09	Peak
4 17461.000	7.28	40.42	47.70	54.00	-6.30	Average
5 17461.000	7.28	53.24	60.52	74.00	-13.48	Peak


18GHz-25GHz_HORIZONTAL

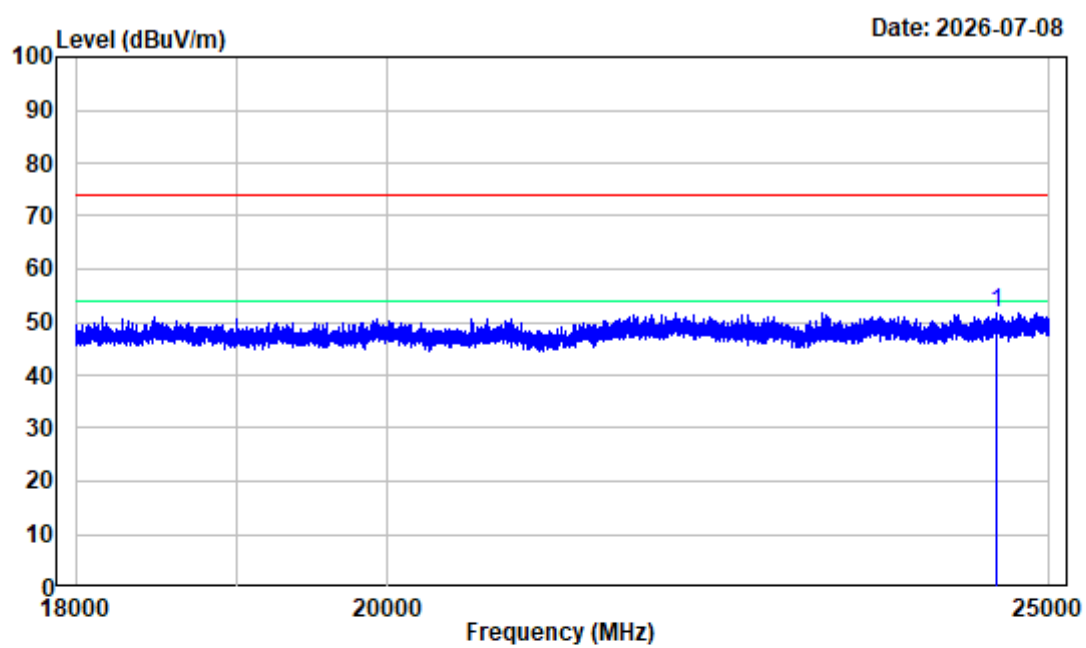

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2132.5MHz+2.4G 802.11g Low Channel 2412MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24566.000	3.32	48.53	51.85	74.00	-22.15	Peak

18GHz-25GHz_VERTICAL

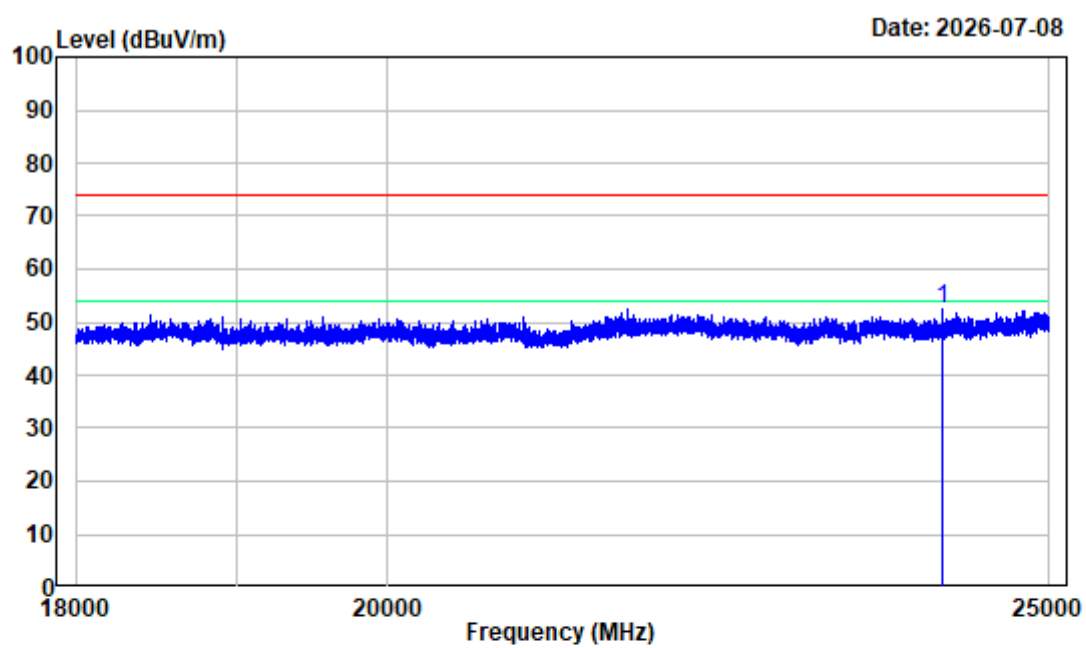

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604T01718E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2132.5MHz+2.4G 802.11g Low Channel 2412MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24113.630	2.70	49.66	52.36	74.00	-21.64	Peak

Appendix B.3: RF Conducted Test

Test Information:

Sample No.:	3MLO-1	Test Date:	2026/07/06~2026/07/27
Test Site:	RF	Test Mode:	Transmitting
Tester:	Steve Lu	Test Result:	Pass


Environmental Conditions:

Temperature: (°C)	25.1-25.2	Relative Humidity: (%)	45.6-49.7	ATM Pressure: (kPa)	100.1
----------------------	-----------	---------------------------	-----------	------------------------	-------

Appendix B.3.1: 6dB Emission Bandwidth


Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11b	2412	8.689	≥0.5	Pass
	2437	8.769	≥0.5	Pass
	2462	9.129	≥0.5	Pass
802.11g	2412	16.457	≥0.5	Pass
	2437	16.457	≥0.5	Pass
	2462	16.457	≥0.5	Pass
802.11n20	2412	17.377	≥0.5	Pass
	2437	17.297	≥0.5	Pass
	2462	17.177	≥0.5	Pass
802.11n40	2422	33.393	≥0.5	Pass
	2437	33.233	≥0.5	Pass
	2452	32.753	≥0.5	Pass

802.11b_2412MHz

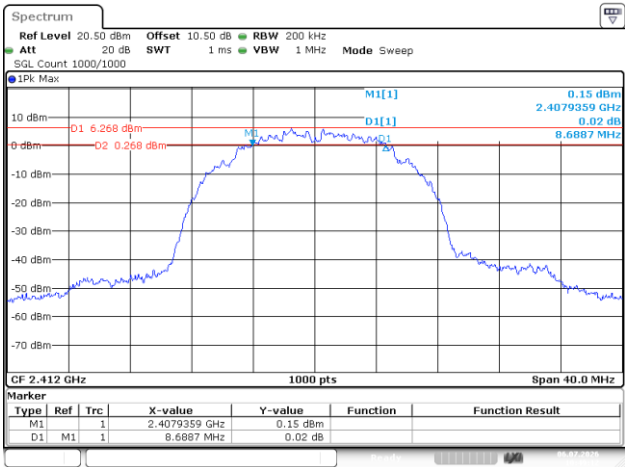


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:49:12

802.11b_2437MHz

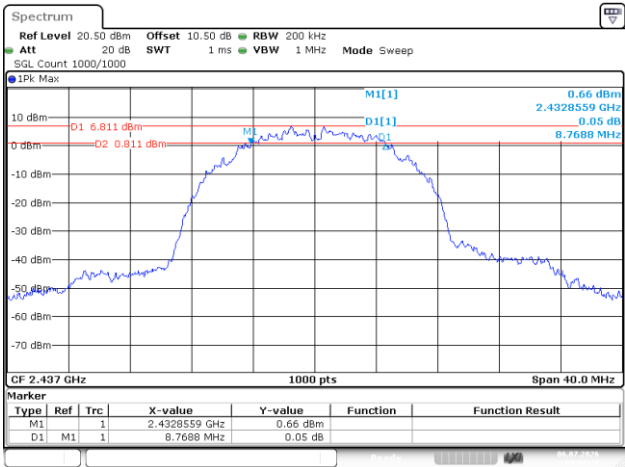


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:47:22

802.11b_2462MHz

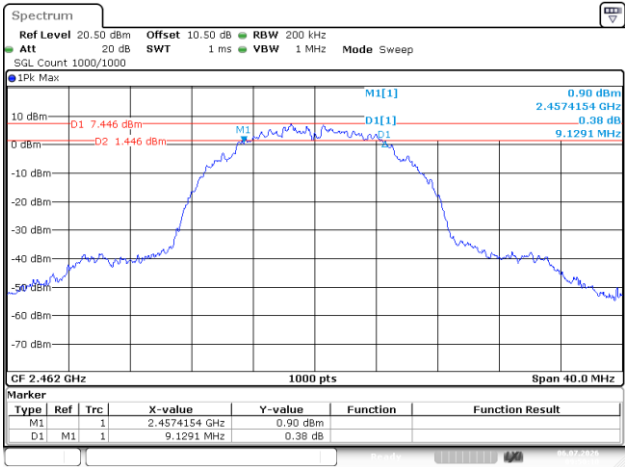


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:50:10

802.11g_2412MHz

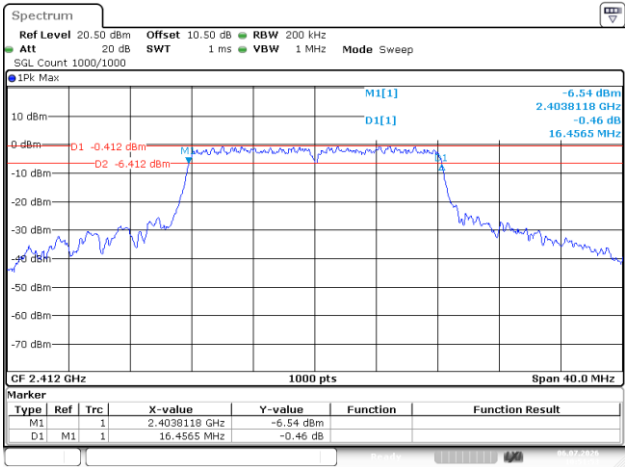


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:51:54

802.11g_2437MHz

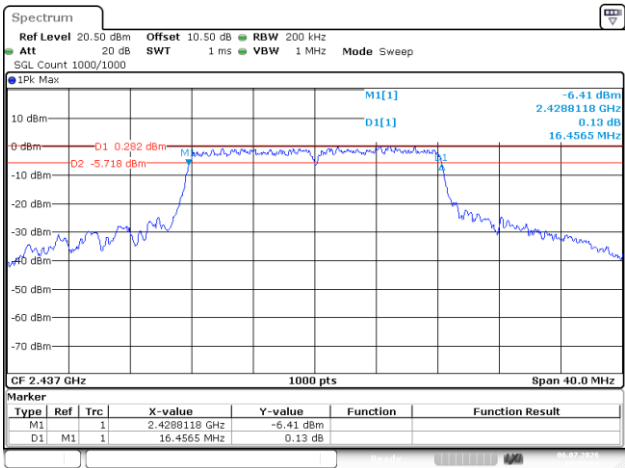


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:56:02

802.11g_2462MHz

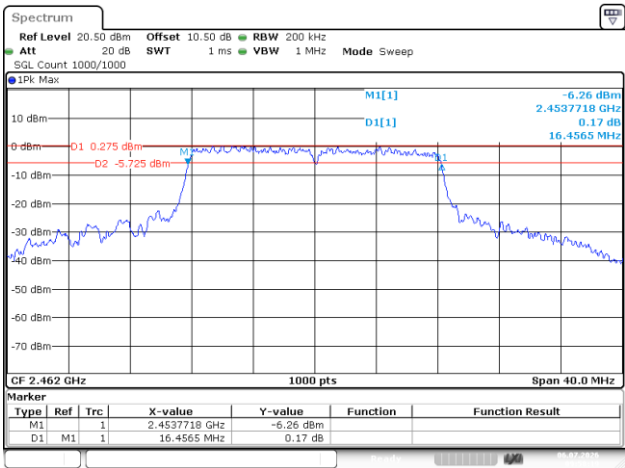


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:58:19

802.11n20_2412MHz

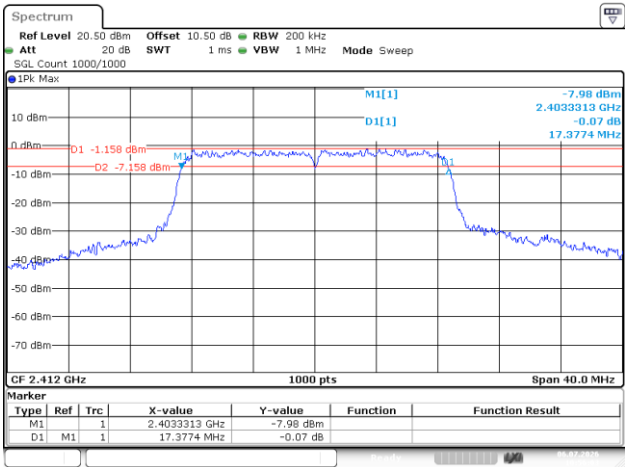


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:56:03

802.11n20_2437MHz

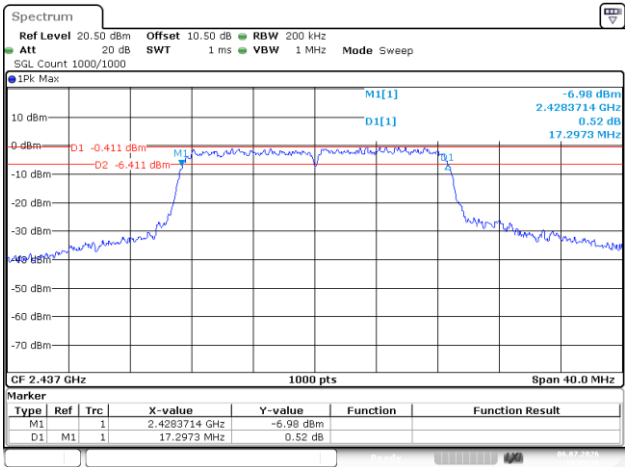


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:05:11

802.11n20_2462MHz

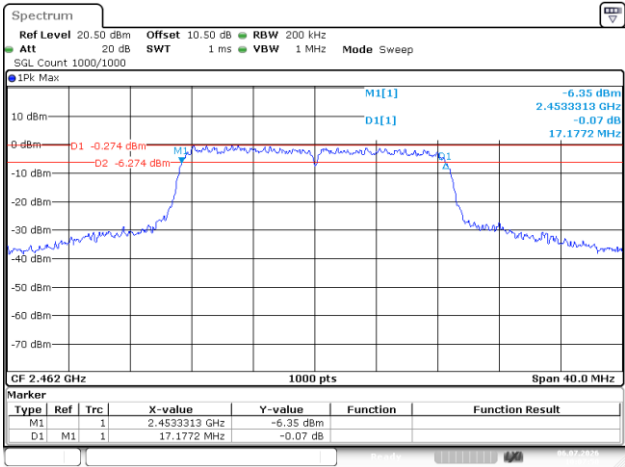


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:07:51

802.11n40_2422MHz

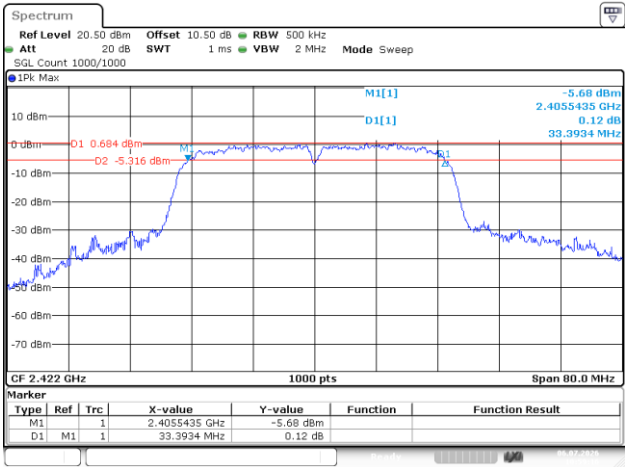


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:59:16

802.11n40_2437MHz

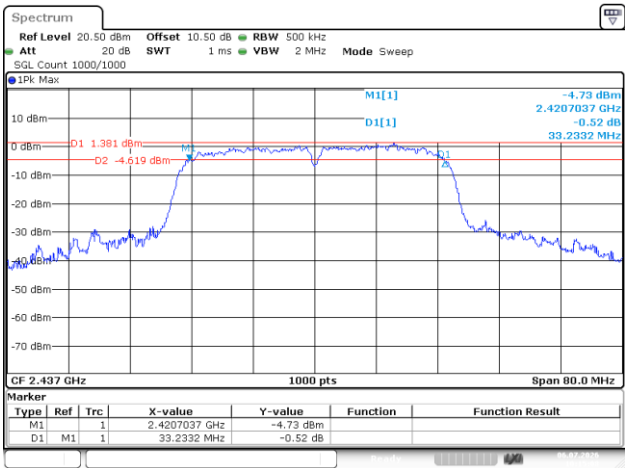

ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:15:08

802.11n40_2452MHz

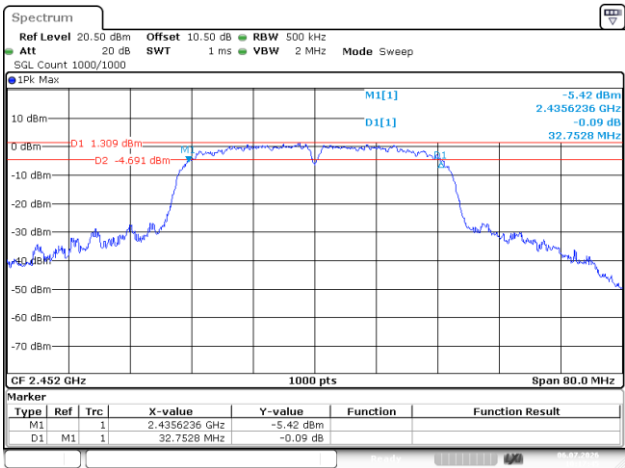


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:17:45

Appendix B.3.2: 99% Occupied Bandwidth


Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11b	2412	13.120
	2437	13.160
	2462	13.160
802.11g	2412	16.440
	2437	16.440
	2462	16.480
802.11n20	2412	17.320
	2437	17.360
	2462	17.360
802.11n40	2422	34.800
	2437	34.800
	2452	34.560

802.11b_2412MHz

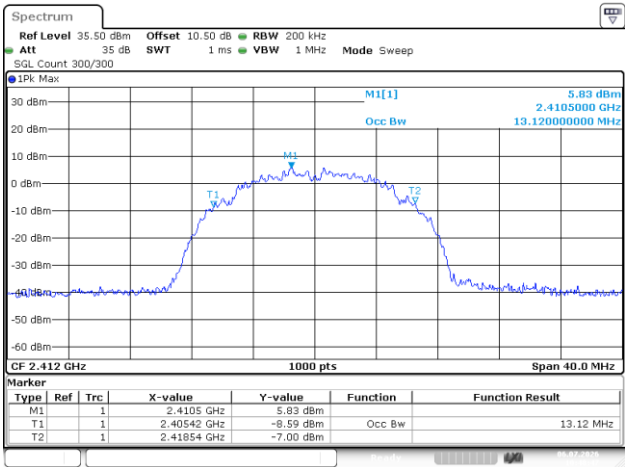


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:48:47

802.11b_2437MHz

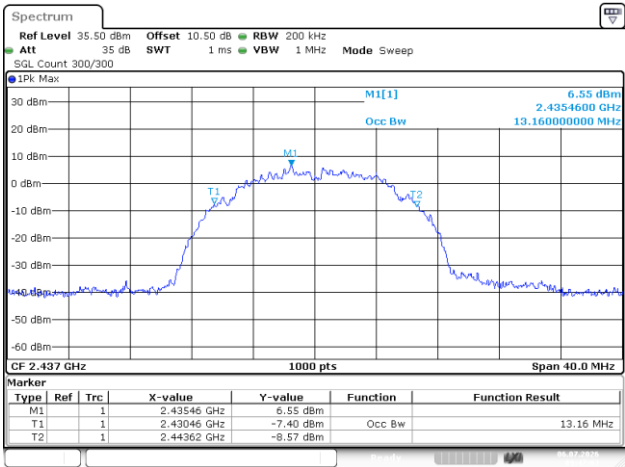


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:47:03

802.11b_2462MHz

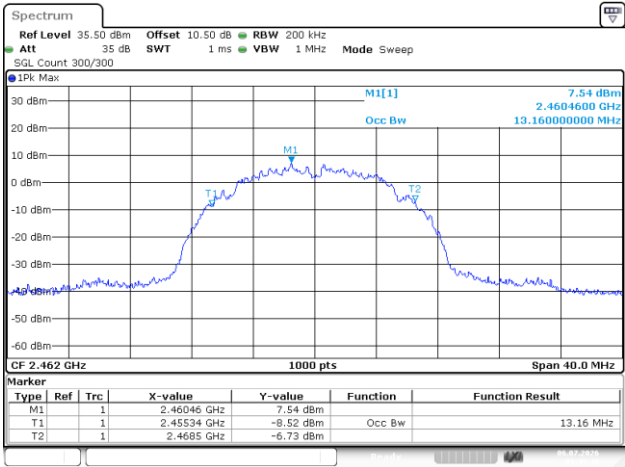


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:49:49

802.11g_2412MHz

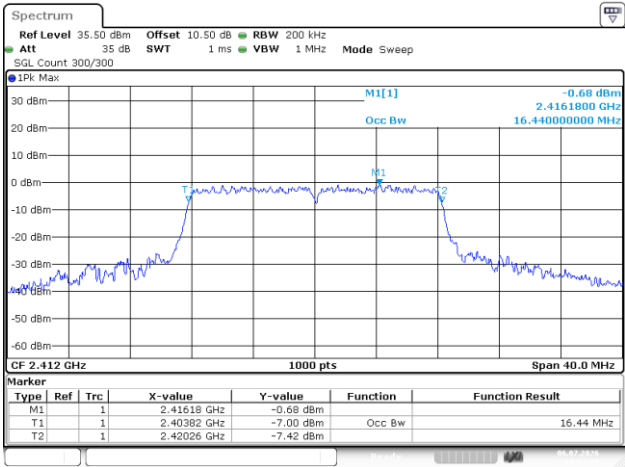


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:51:28

802.11g_2437MHz

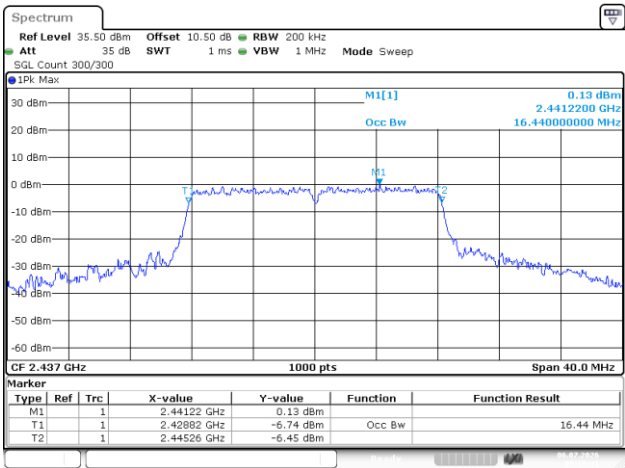


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:55:42

802.11g_2462MHz

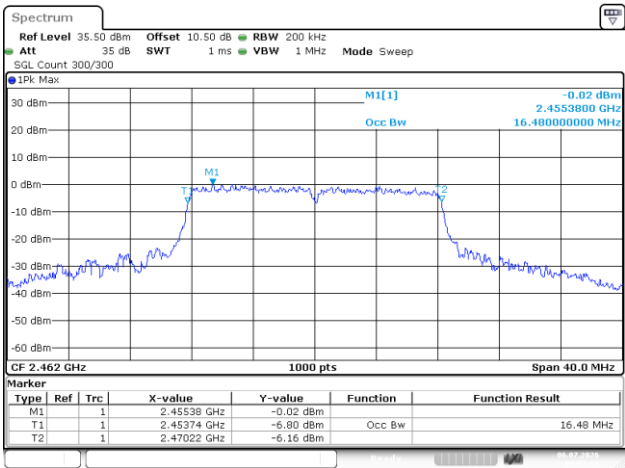


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:57:58

802.11n20_2412MHz

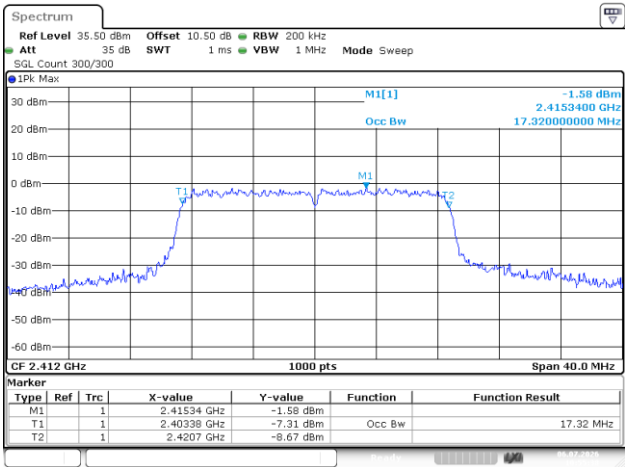


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:55:38

802.11n20_2437MHz

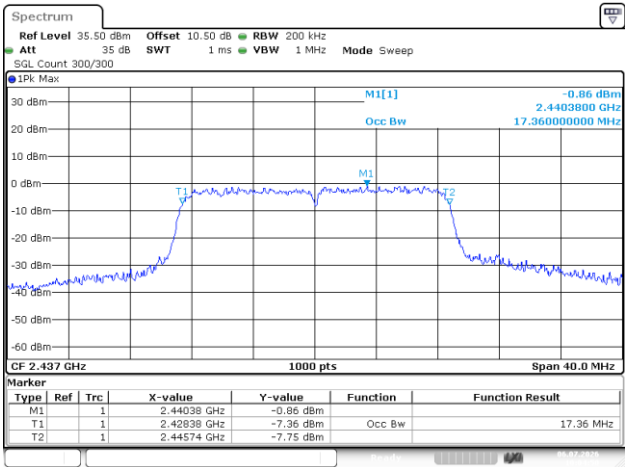


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:04:51

802.11n20_2462MHz

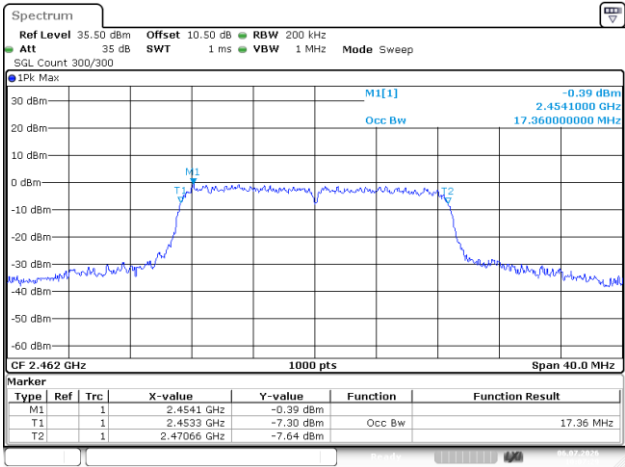


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:07:29

802.11n40_2422MHz

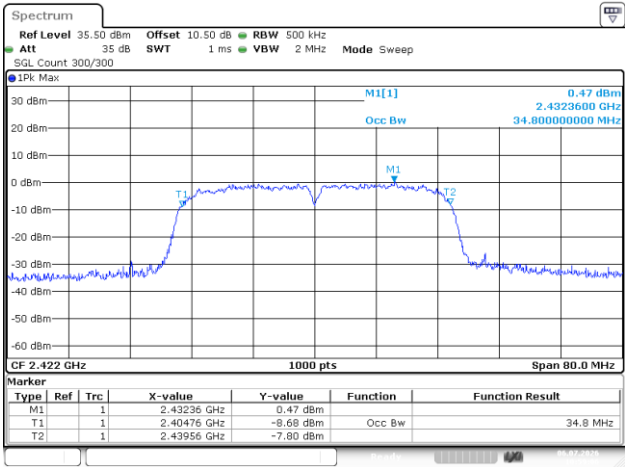


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:59:06

802.11n40_2437MHz

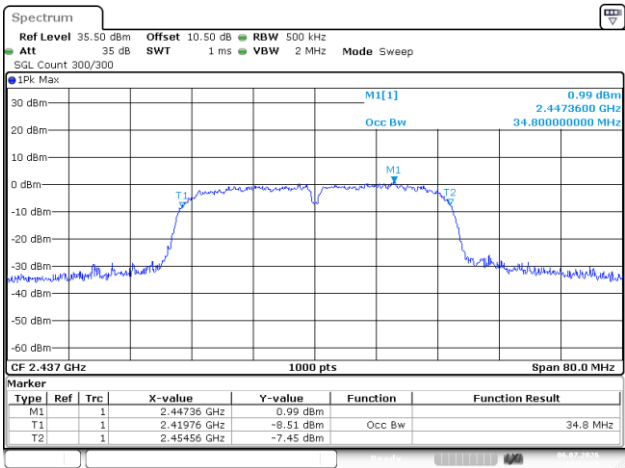

ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:14:59

802.11n40_2452MHz

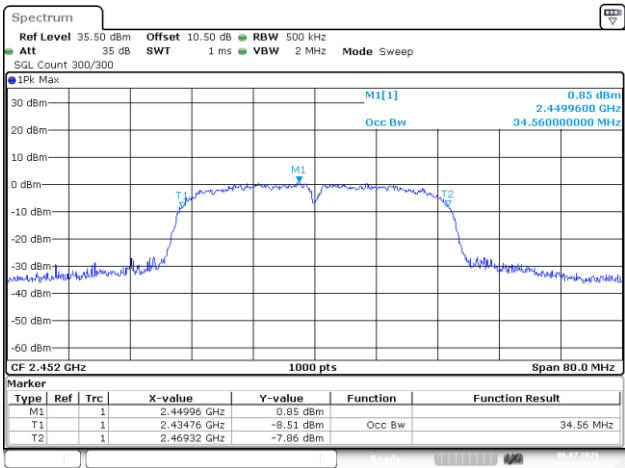

ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:17:36

Appendix B.3.3: Maximum Conducted Output Power

Mode	Test Frequency (MHz)	Peak Output Power(dBm)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11b	2412	17.50	14.42	30	Pass
	2437	17.31	14.15	30	Pass
	2462	17.69	14.64	30	Pass
802.11g	2412	20.29	12.43	30	Pass
	2437	20.20	12.20	30	Pass
	2462	20.28	12.71	30	Pass
802.11n20	2412	20.21	12.27	30	Pass
	2437	20.18	12.05	30	Pass
	2462	20.22	12.55	30	Pass
802.11n40	2422	20.25	11.51	30	Pass
	2437	20.01	11.49	30	Pass
	2452	20.26	11.97	30	Pass

Note 1: EIRP = Conducted Peak Output Power + Antenna Gain


Note 2: The maximum antenna gain is 1.5 dBi[#].

Note 3: The maximum EIRP is 20.29 dBm + 1.5 dBi= 21.79 dBm<36dBm, so it's compliance with ISED EIRP limit.

Appendix B.3.4: Power Spectral Density


Mode	Test Frequency (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	2412	-11.28	8	Pass
	2437	-10.94	8	Pass
	2462	-10.76	8	Pass
802.11g	2412	-18.60	8	Pass
	2437	-17.63	8	Pass
	2462	-17.61	8	Pass
802.11n20	2412	-17.62	8	Pass
	2437	-16.87	8	Pass
	2462	-16.62	8	Pass
802.11n40	2422	-18.82	8	Pass
	2437	-18.06	8	Pass
	2452	-18.26	8	Pass

802.11b_2412MHz

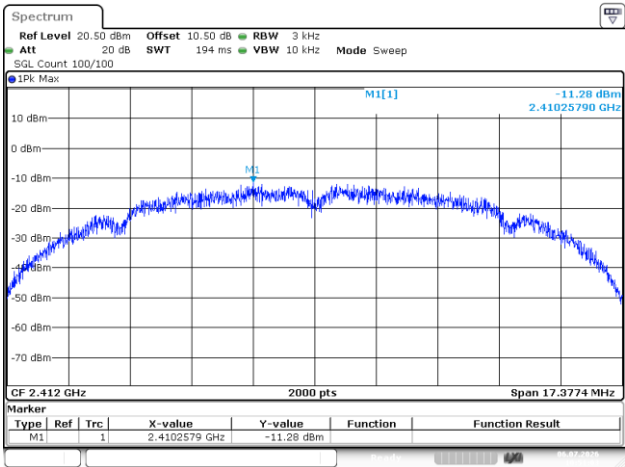


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:51:03

802.11b_2437MHz

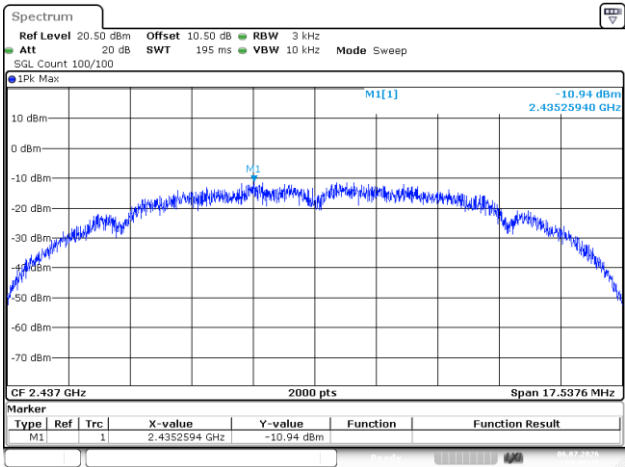


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:48:41

802.11b_2462MHz

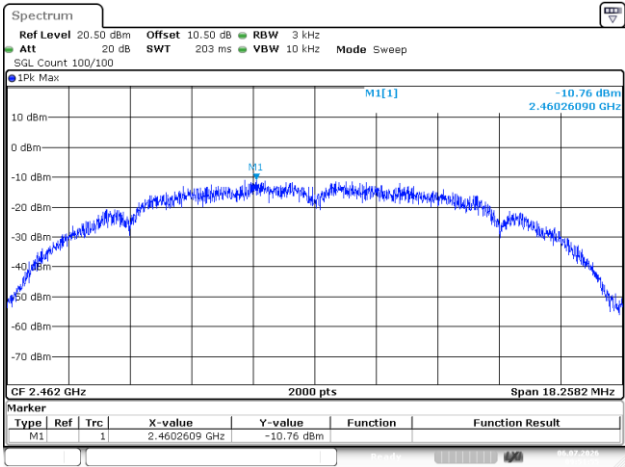


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:51:55

802.11g_2412MHz

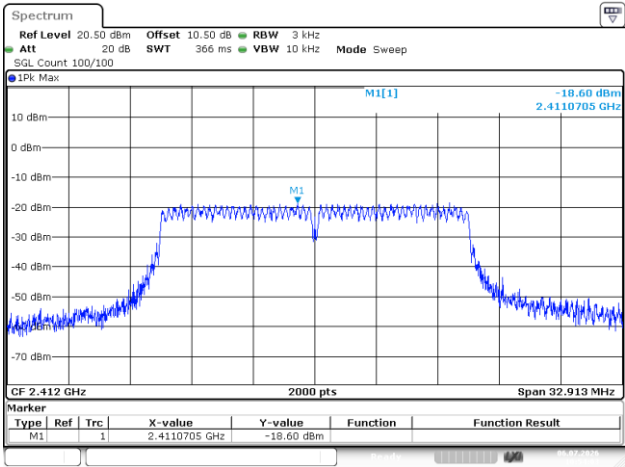


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:54:03

802.11g_2437MHz

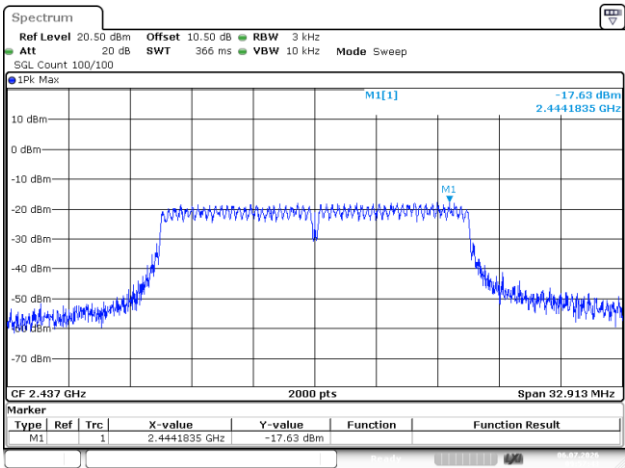


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:57:44

802.11g_2462MHz

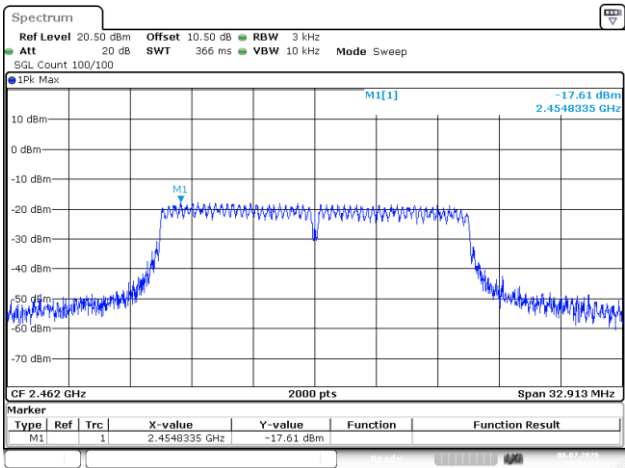


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:00:24


802.11n20_2412MHz

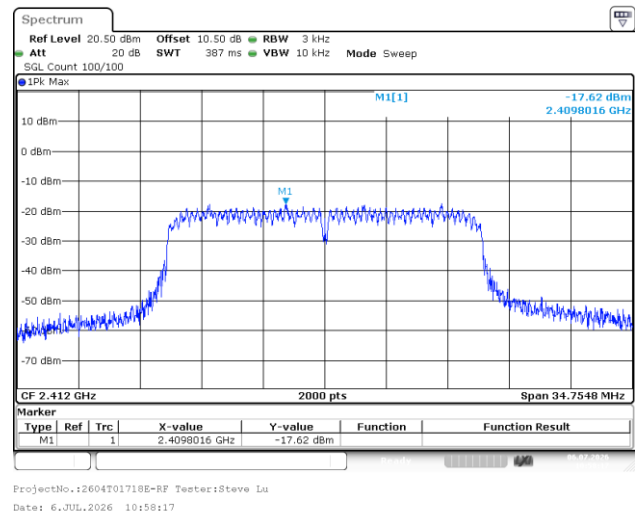


802.11n20_2437MHz

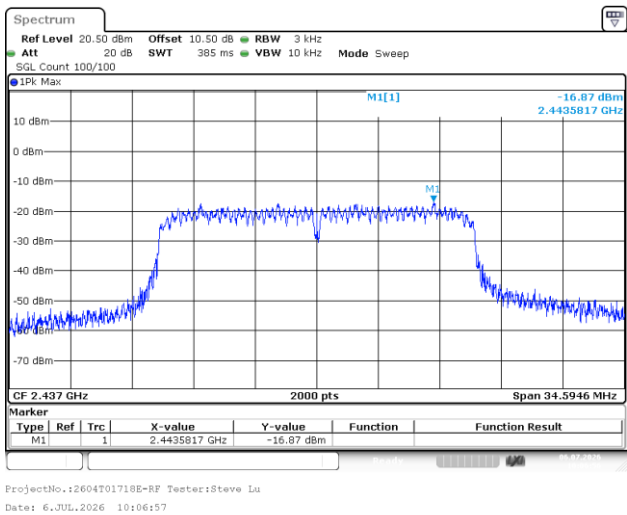


802.11n20_2462MHz

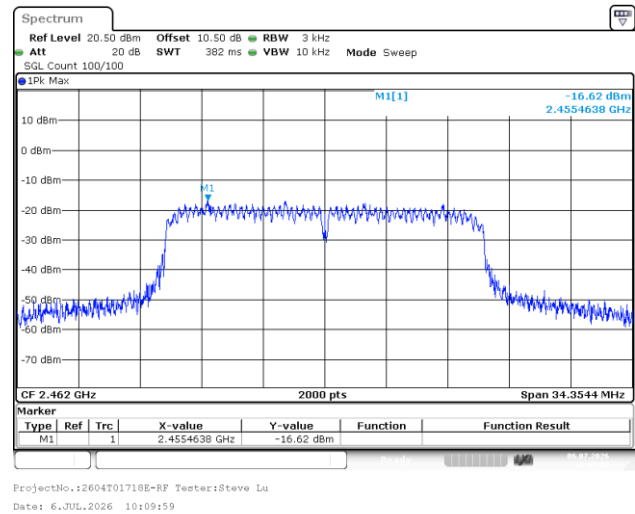


802.11n40_2422MHz

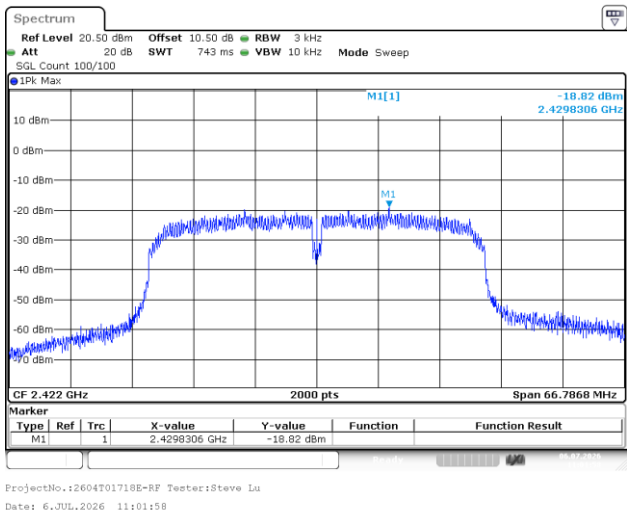

802.11n40_2437MHz

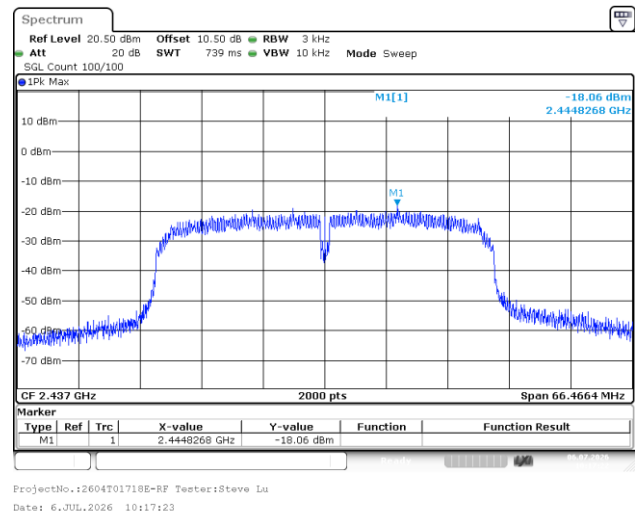

802.11n40_2452MHz

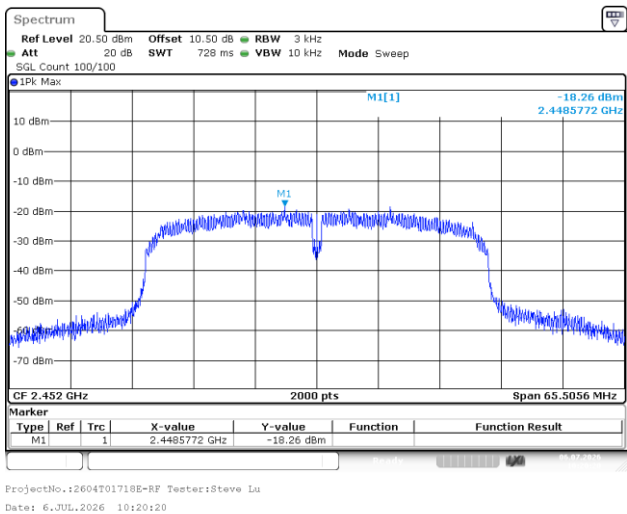


Appendix B.3.5: Duty Cycle

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11b	2437	100	100	100	0	NA	0.010
802.11g	2437	100	100	100	0	NA	0.010
802.11n20	2437	100	100	100	0	NA	0.010
802.11n40	2437	100	100	100	0	NA	0.010


Duty Cycle = Ton/(Ton+Toff)*100%

802.11b_2437MHz

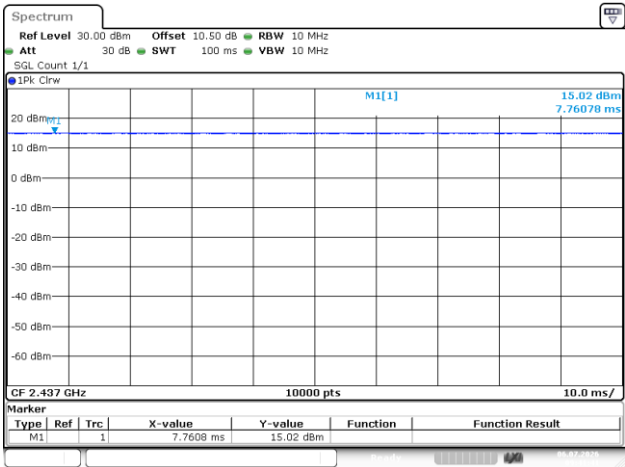


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:41:41

802.11g_2437MHz

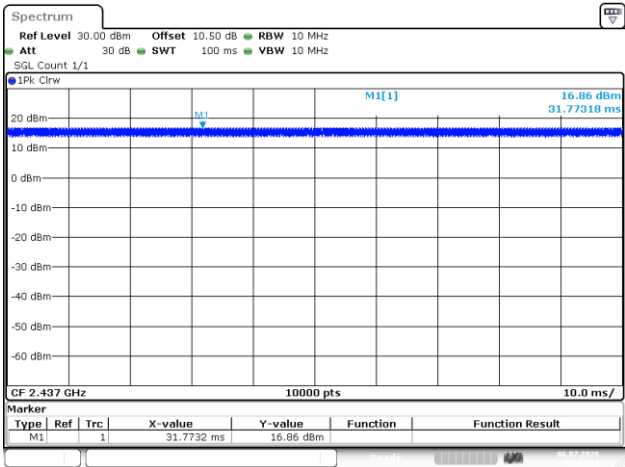


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:42:06

802.11n20_2437MHz

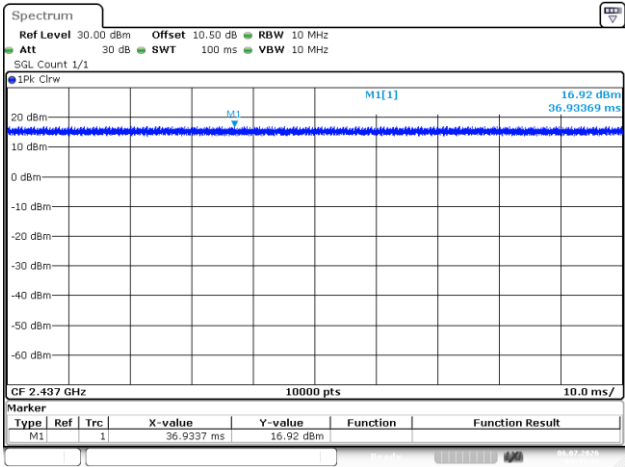

ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:43:18


802.11n40_2437MHz

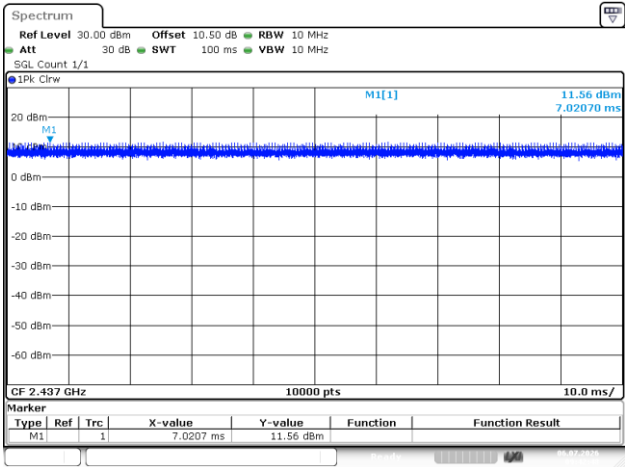


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:42:48

Appendix B.3.6: Conducted Spurious Emission


802.11b_2412MHz

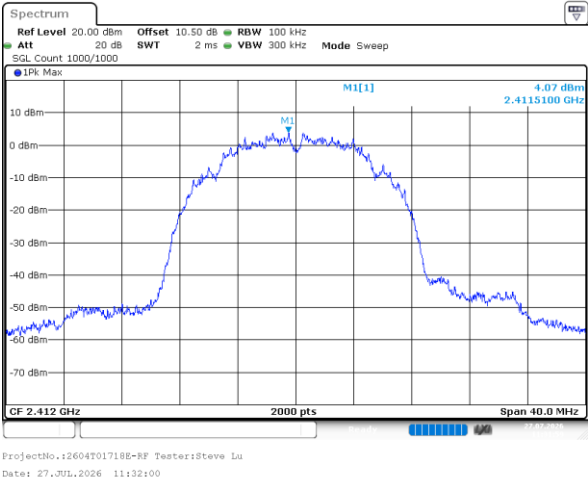


802.11b_2412MHz

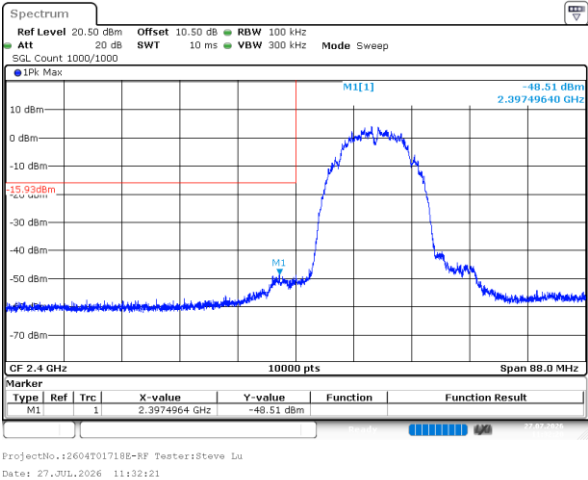


802.11b_2412MHz

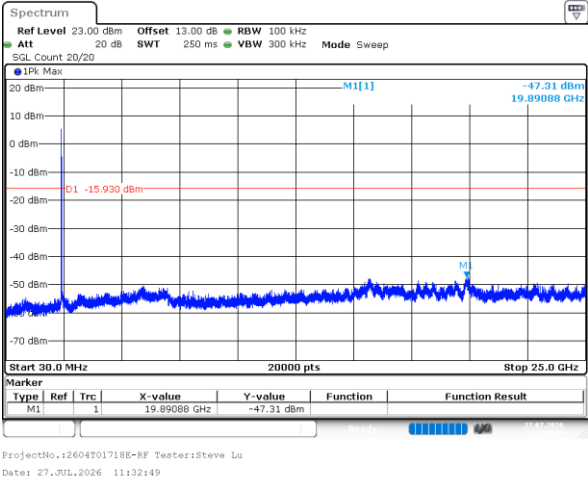


802.11b_2437MHz

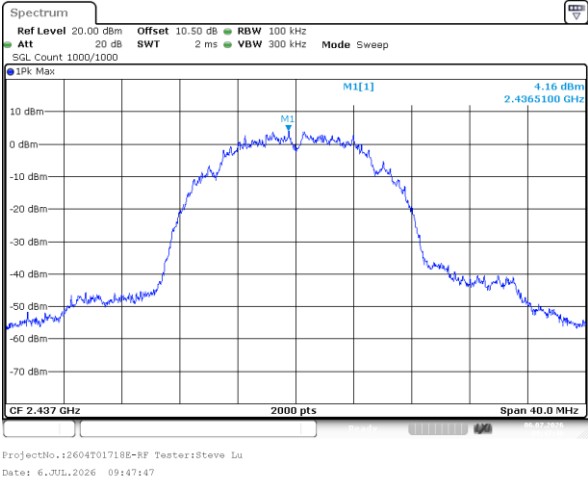


802.11b_2437MHz

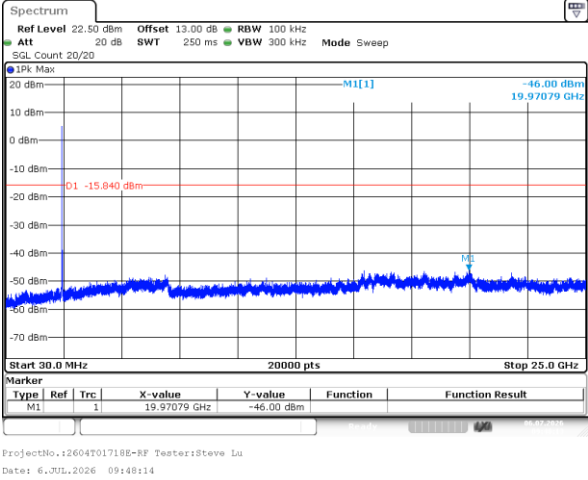

802.11b_2462MHz

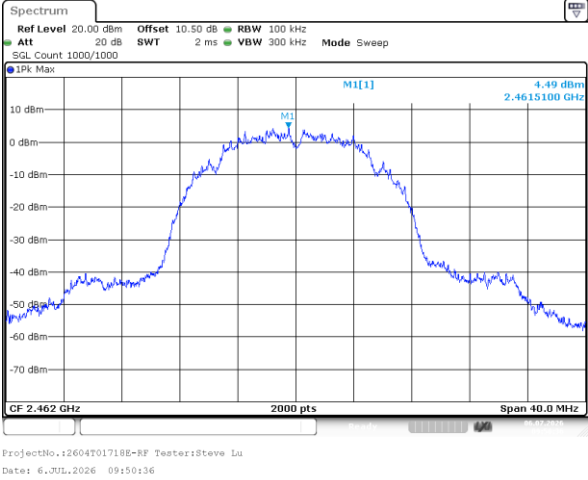


802.11b_2462MHz

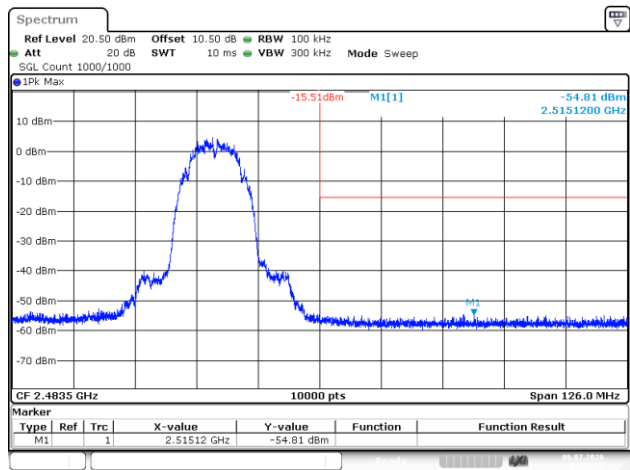


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:50:59

802.11b_2462MHz

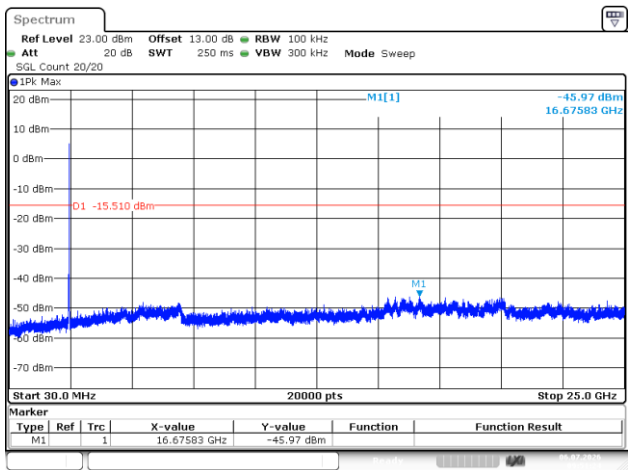


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:51:25

802.11g_2412MHz

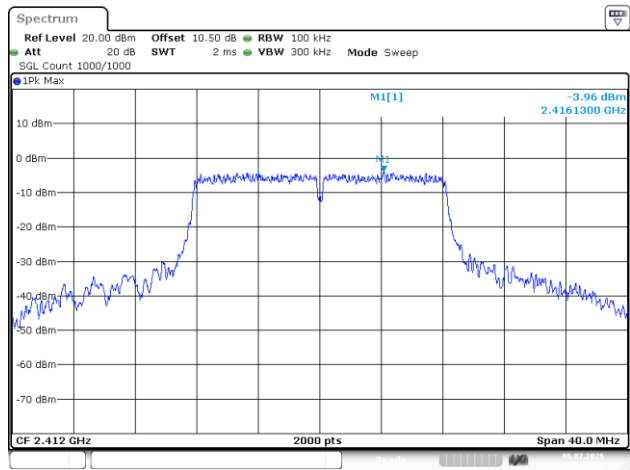


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:52:27

802.11g_2412MHz

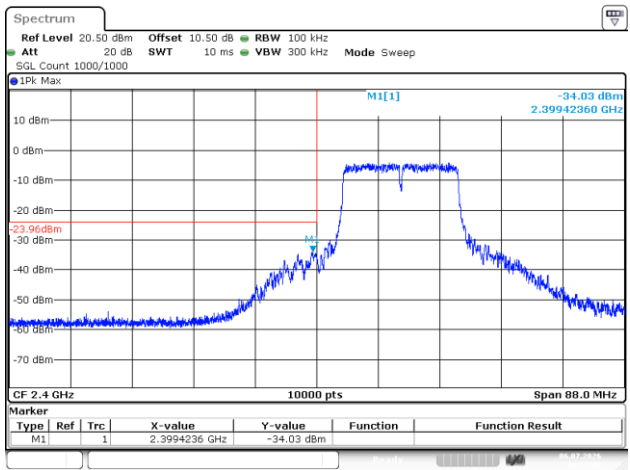


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:52:49

802.11g_2412MHz

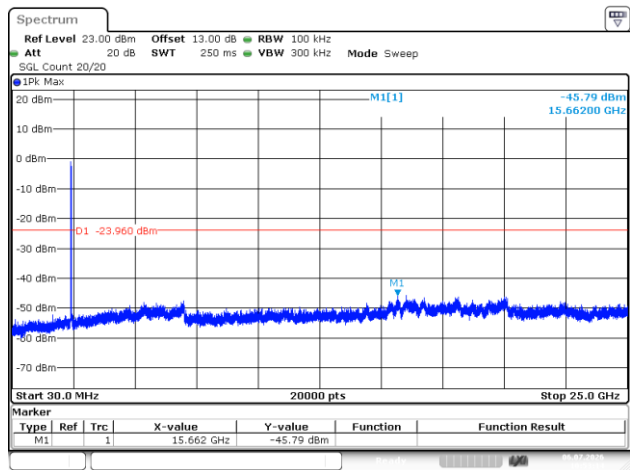


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:53:14

802.11g_2437MHz

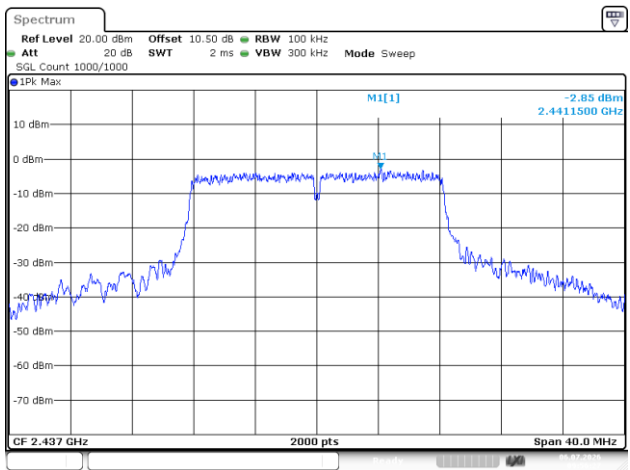


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:56:28

802.11g_2437MHz

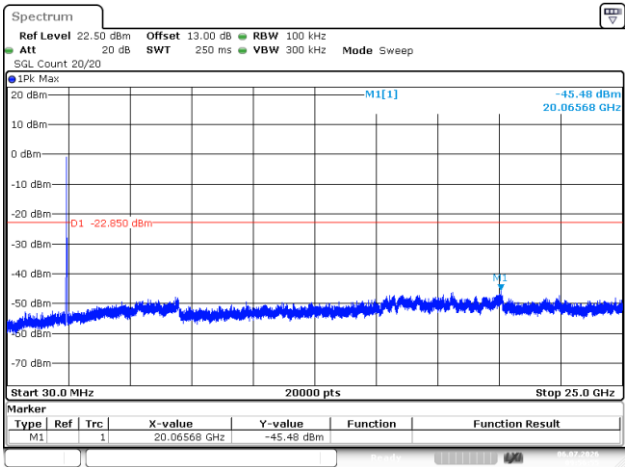


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:56:55

802.11g_2462MHz

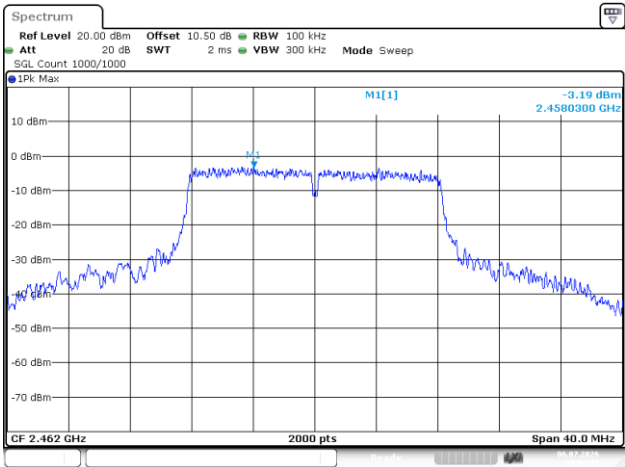


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:58:47

802.11g_2462MHz

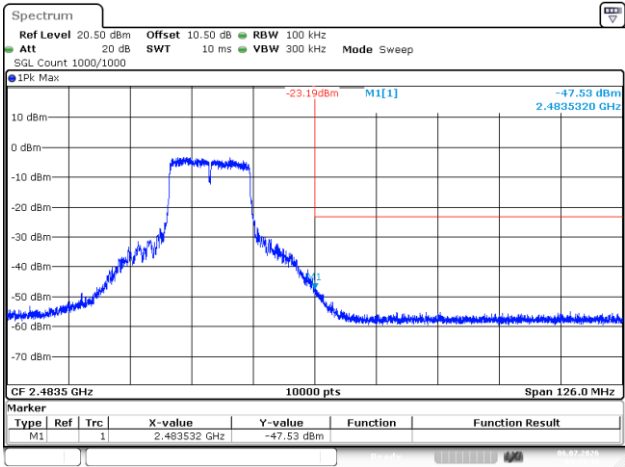


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:59:11

802.11g_2462MHz

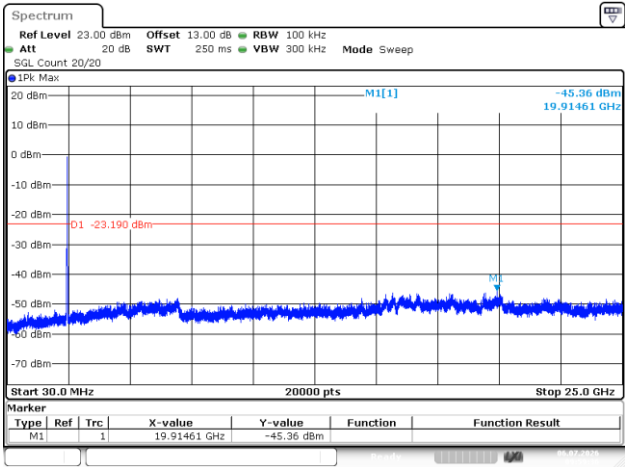


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 09:59:36

802.11n20_2412MHz

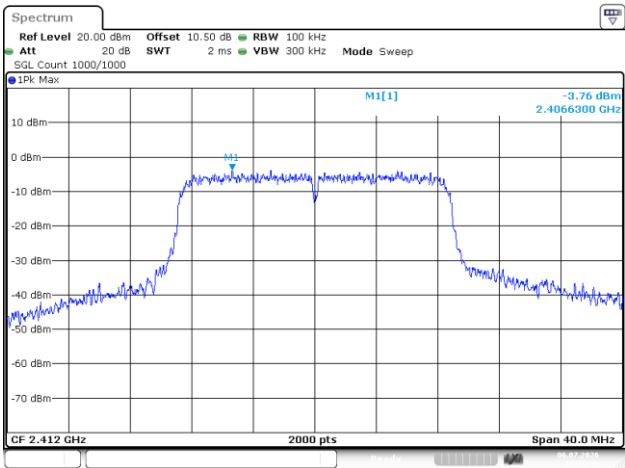


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:56:37

802.11n20_2412MHz

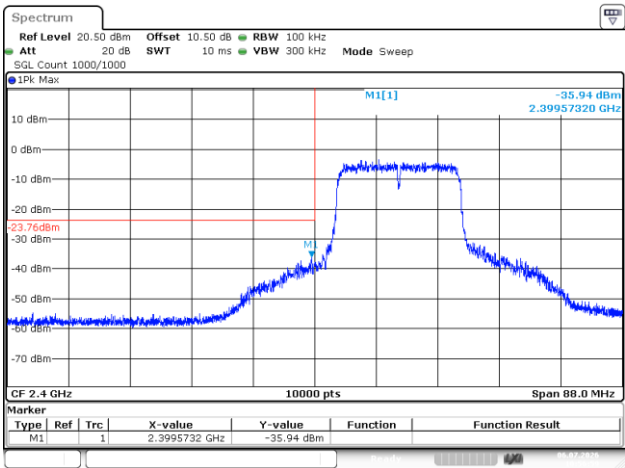


ProjectNo.:2604T01718E-RF Tester:Steve Lu
 Date: 6.JUL.2026 10:56:59

802.11n20_2412MHz

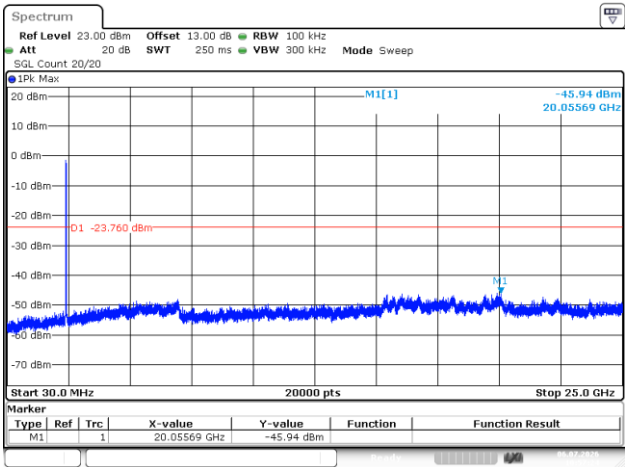


ProjectNo.:2604T01718E-RF Tester:Steve Lu
Date: 6.JUL.2026 10:57:24

802.11n20_2437MHz

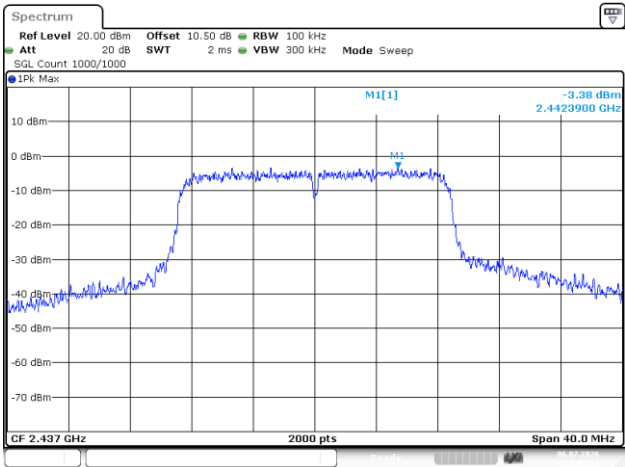


ProjectNo.:2604T01718E-RF Tester:Steve Lu
Date: 6.JUL.2026 10:05:17

802.11n20_2437MHz

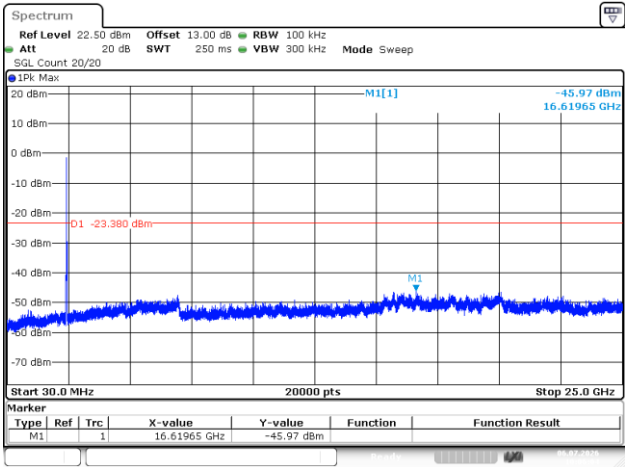


ProjectNo.:2604T01718E-RF Tester:Steve Lu
Date: 6.JUL.2026 10:06:05

802.11n20_2462MHz

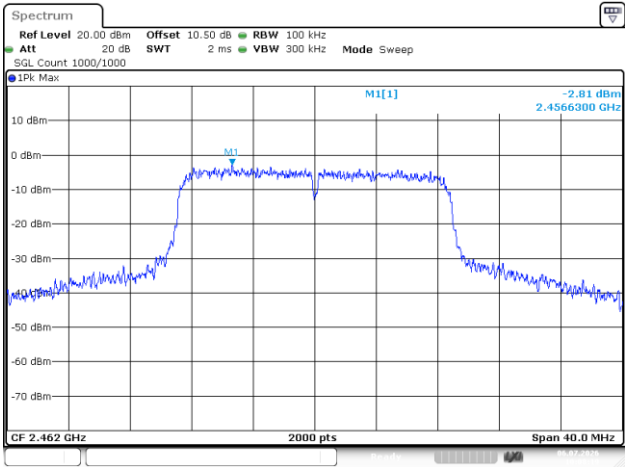


ProjectNo.:2604T01718E-RF Tester:Steve Lu
Date: 6.JUL.2026 10:08:20

802.11n20_2462MHz

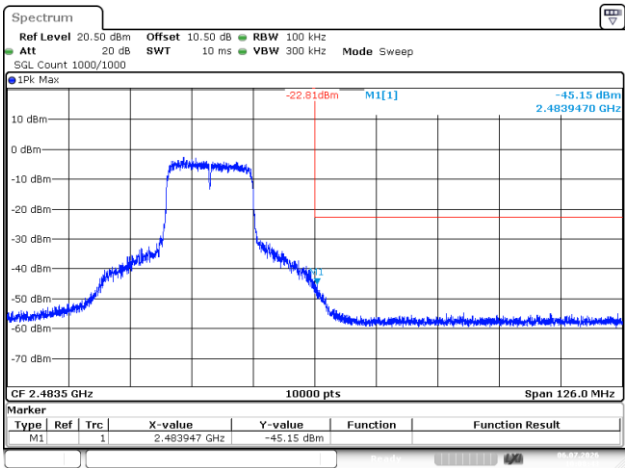


ProjectNo.:2604T01718E-RF Tester:Steve Lu
Date: 6.JUL.2026 10:08:43

802.11n20_2462MHz

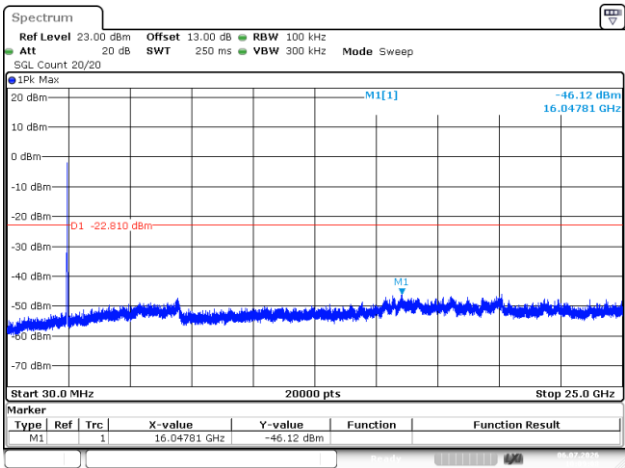


ProjectNo.:2604T01718E-RF Tester:Steve Lu
Date: 6.JUL.2026 10:09:09


802.11n40_2422MHz

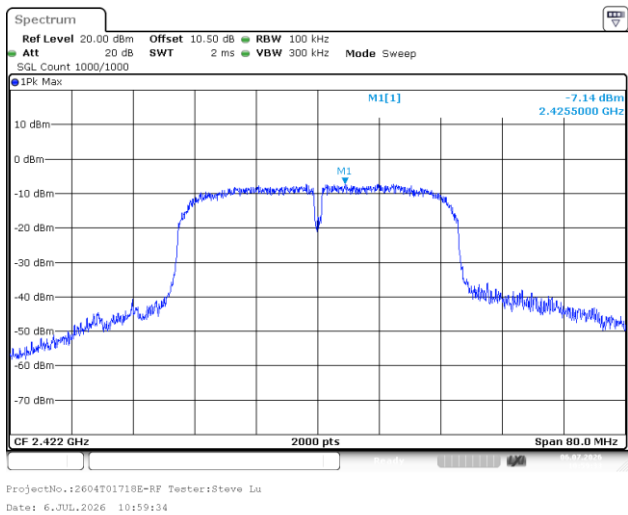


802.11n40_2422MHz

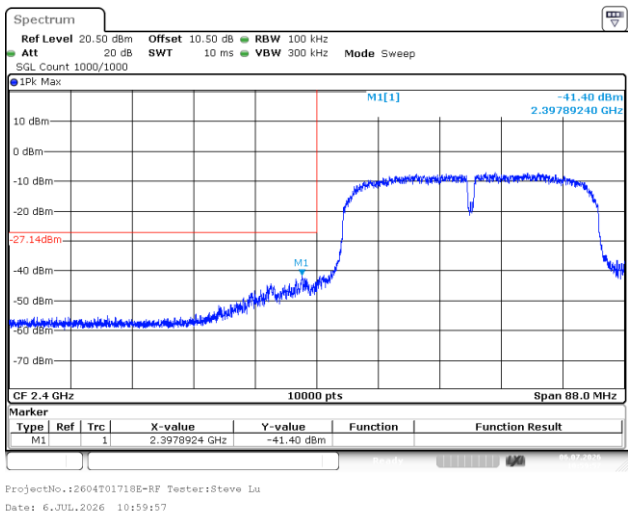


802.11n40_2422MHz

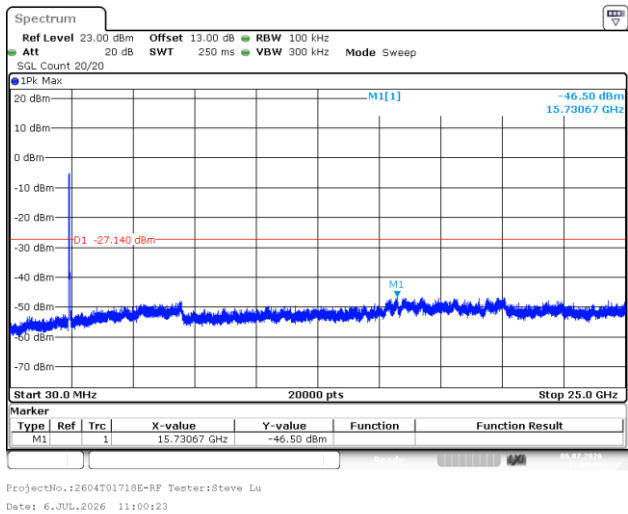


802.11n40_2437MHz

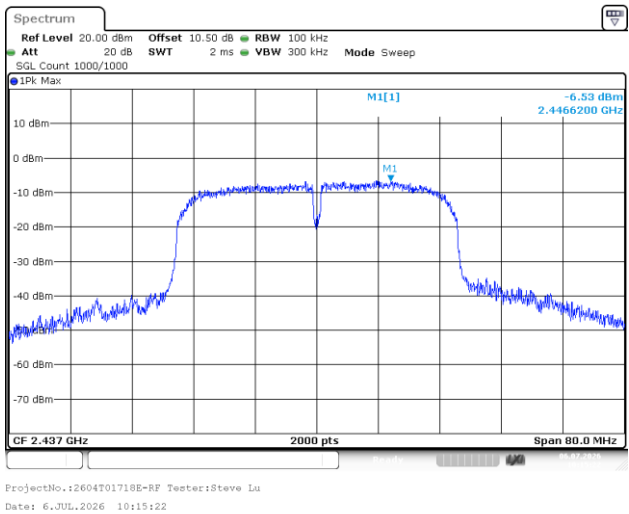


802.11n40_2437MHz

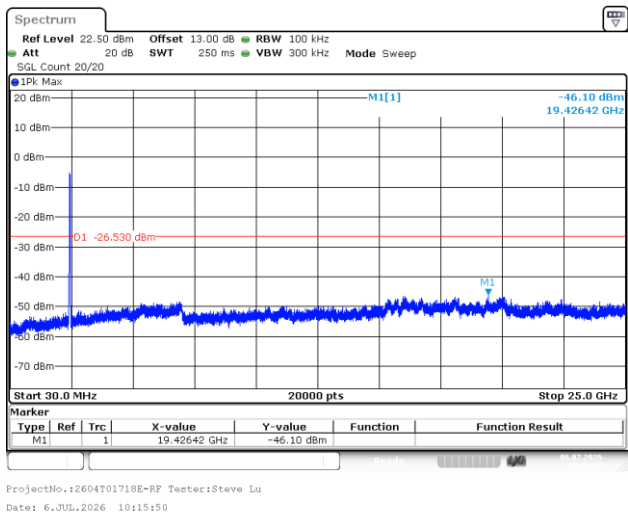

802.11n40_2452MHz

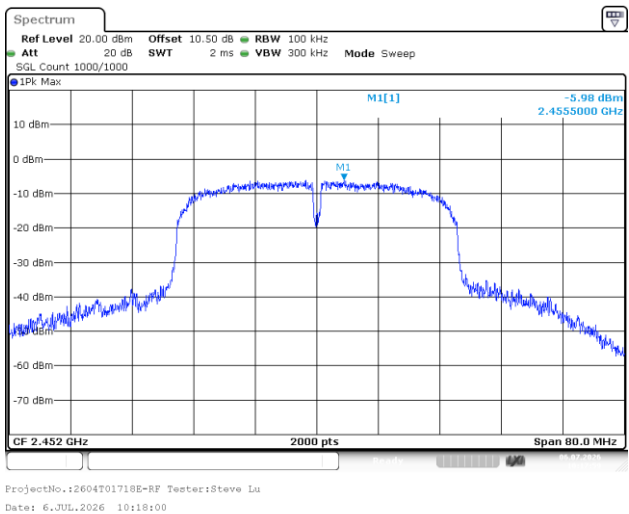


802.11n40_2452MHz

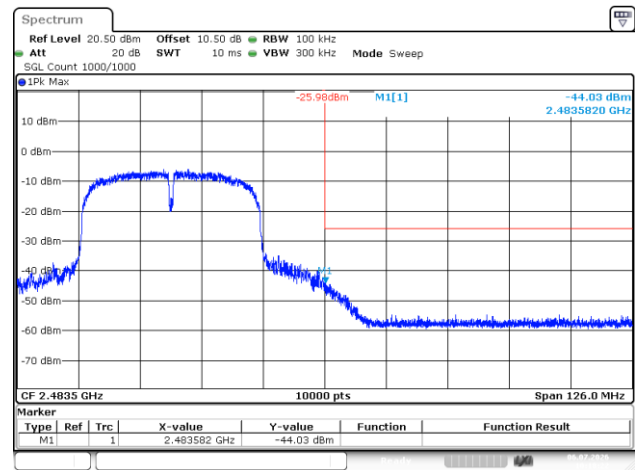

ProjectNo.:2604T01718E-RF Tester:Steve Lu
Date: 6.JUL.2026 10:18:23

802.11n40_2452MHz

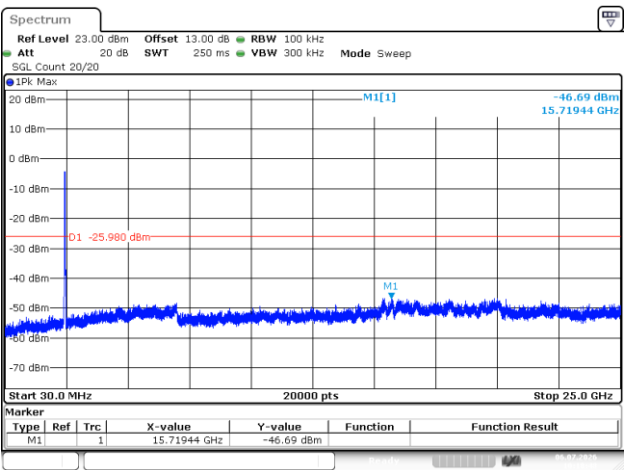

ProjectNo.:2604T01718E-RF Tester:Steve Lu
Date: 6.JUL.2026 10:18:48

***** END *****