

D.2 Power Limits. Maximum Output power & Peak power spectral density

Test limits:

FCC part	RSS Part	Limits
15.407 (a) (2)	RSS-247 Clause 6.2.3 (1)	For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.


Test procedure:

The Maximum Conducted Output Power was measured using the channel integration method according to point E) 2) e) (Method SA-2 Alternative) of KDB 789033 D02.

The maximum power spectral density (PSD) was measured using the method according to point F) (Method SA-2 Alternative) of KDB 789033 D02.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The setup below was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

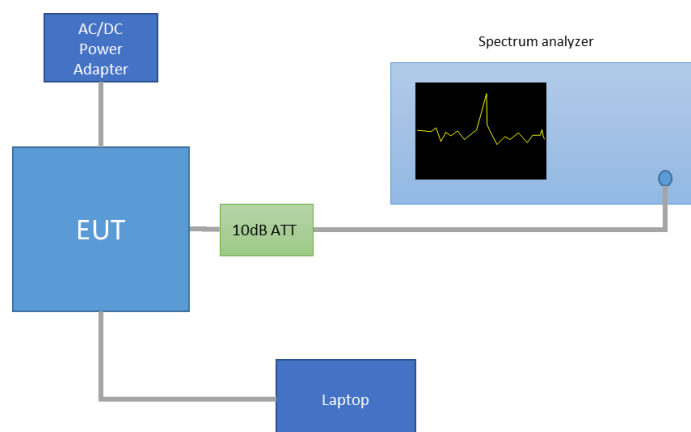

The declared maximum antenna gain is 5dBi.

For the overlapped channels between U-NII-2C and U-NII-3, and according to FCC KDB 644545 D03, the power is computed based on the portion of the emission bandwidth contained within that band. This rule is only applicable for those channels marked as overlapped.

Results tables:

Mode	Rate	Meas. Duty Cycle [%]	CH	Freq. [MHz]	Antenna	Power [dBm]				
						Meas. Cond RMS	Duty cycle Compensated	EIRP	PSD Duty cycle Compensated	Power (mW)
802.11a	6Mbps	98.4	100	5500	SISO CHAIN A	17.19	17.26	22.26	6.36	53.22
			120	5600		17.13	17.20	22.20	6.29	52.49
			140	5700		16.99	17.06	22.06	6.17	50.82
802.11n20	HT0	98.6	100	5500		17.10	17.16	22.16	6.07	52.03
			120	5600		17.00	17.06	22.06	5.97	50.85
			140	5700		17.37	17.43	22.43	6.35	55.37
			144*	5720		17.02	17.08	22.08	6.75	51.06
						14.79	14.92	19.92	0.50	31.04
802.11n40	HT0	97.1	102F	5510		16.91	17.04	22.04	2.61	50.58
			118F	5590		17.23	17.36	22.36	2.92	54.45
			134F	5610		17.34	17.47	22.47	3.25	55.82
			142F*	5710		11.55	11.73	16.73	-5.74	14.88
						16.82	17.00	22.00	-0.41	50.07
802.11ac80	VHT0	96	106ac80	5530		17.58	17.76	22.76	0.42	59.68
			122ac80	5610						
			138ac80*	5690						


Max Value


Min Value

* Overlapped channels between U-NII-2C and 5.8 GHz DTS


Results screenshot:


802.11a, 6Mbps

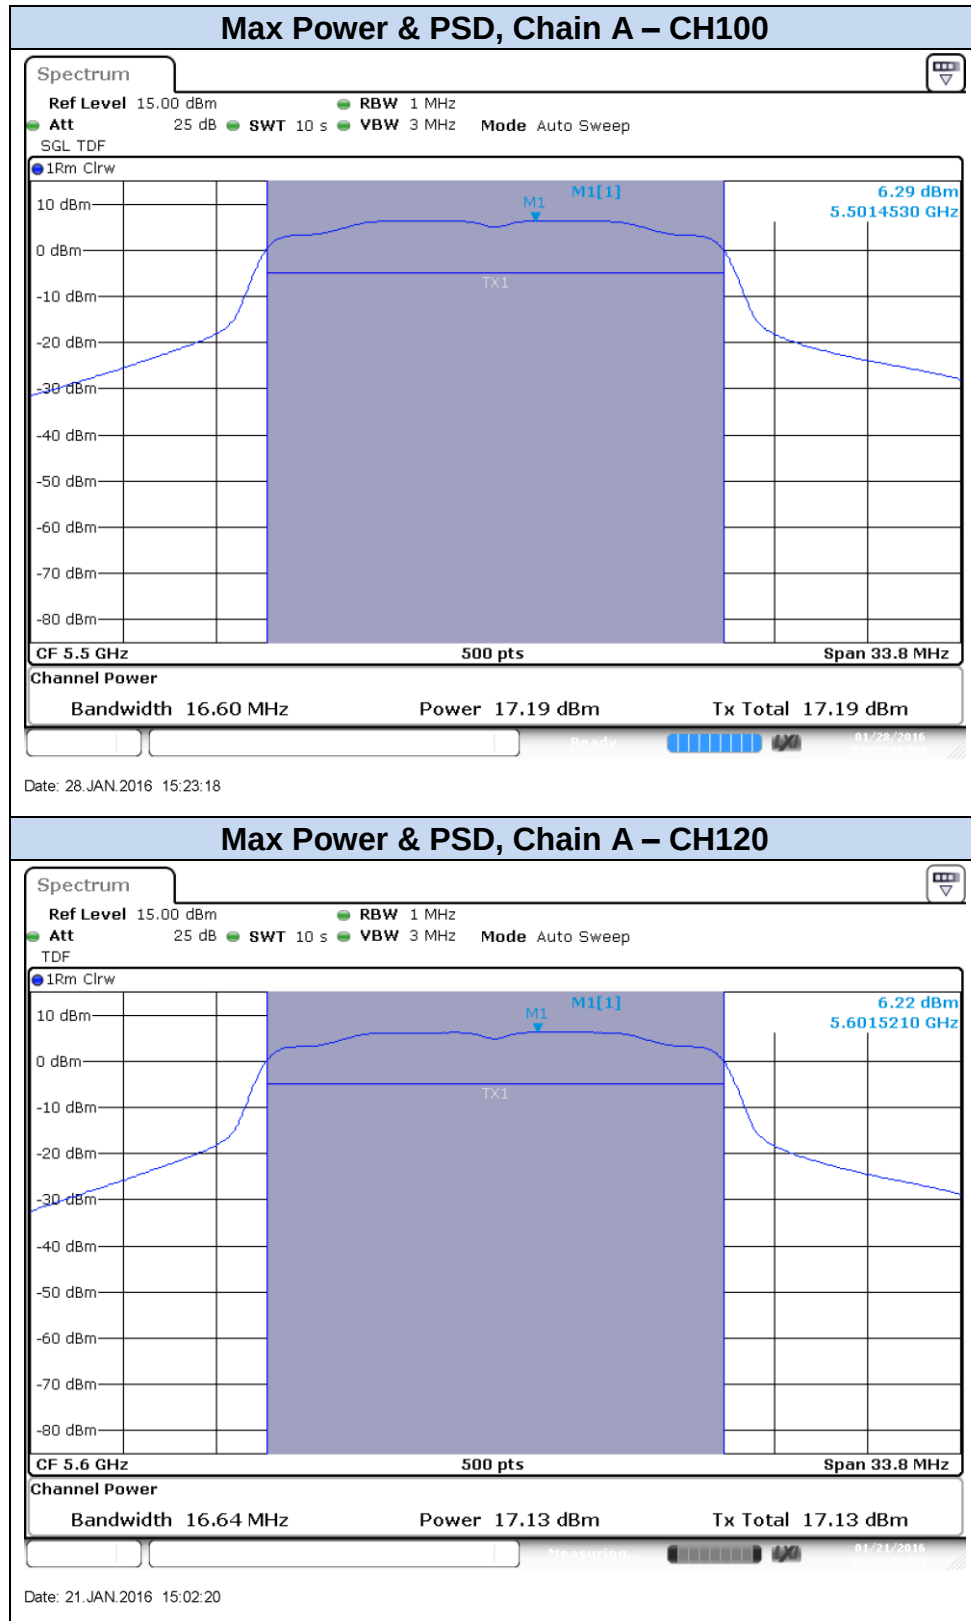


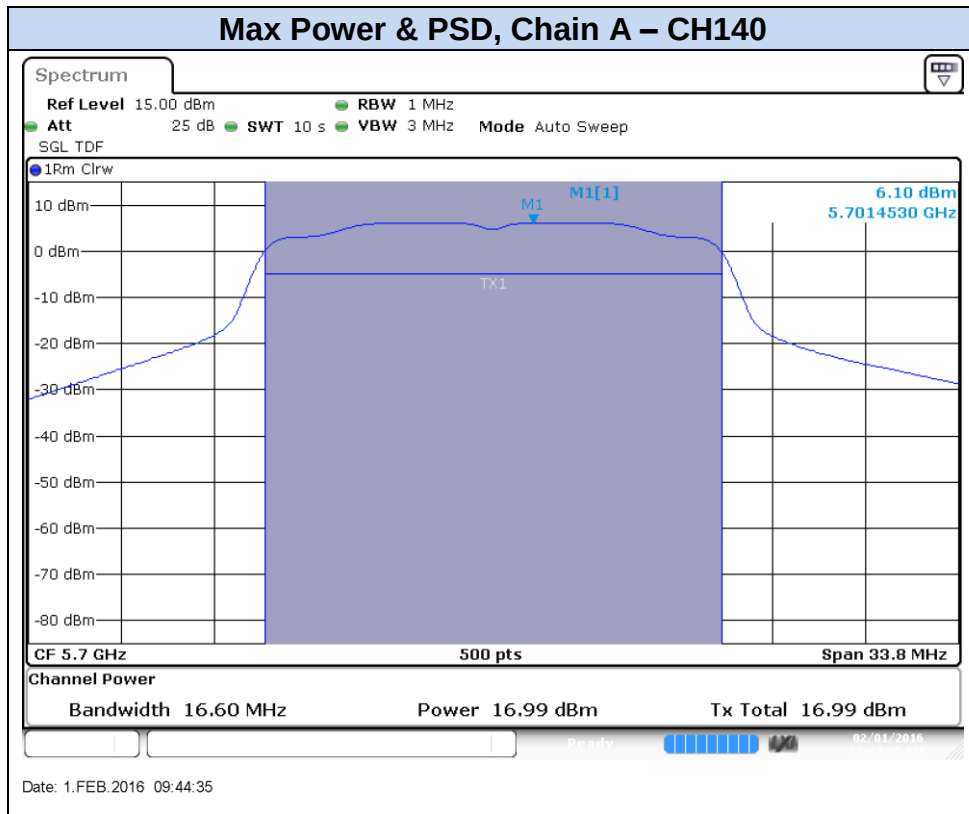



802.11n20, HT0 (SISO)

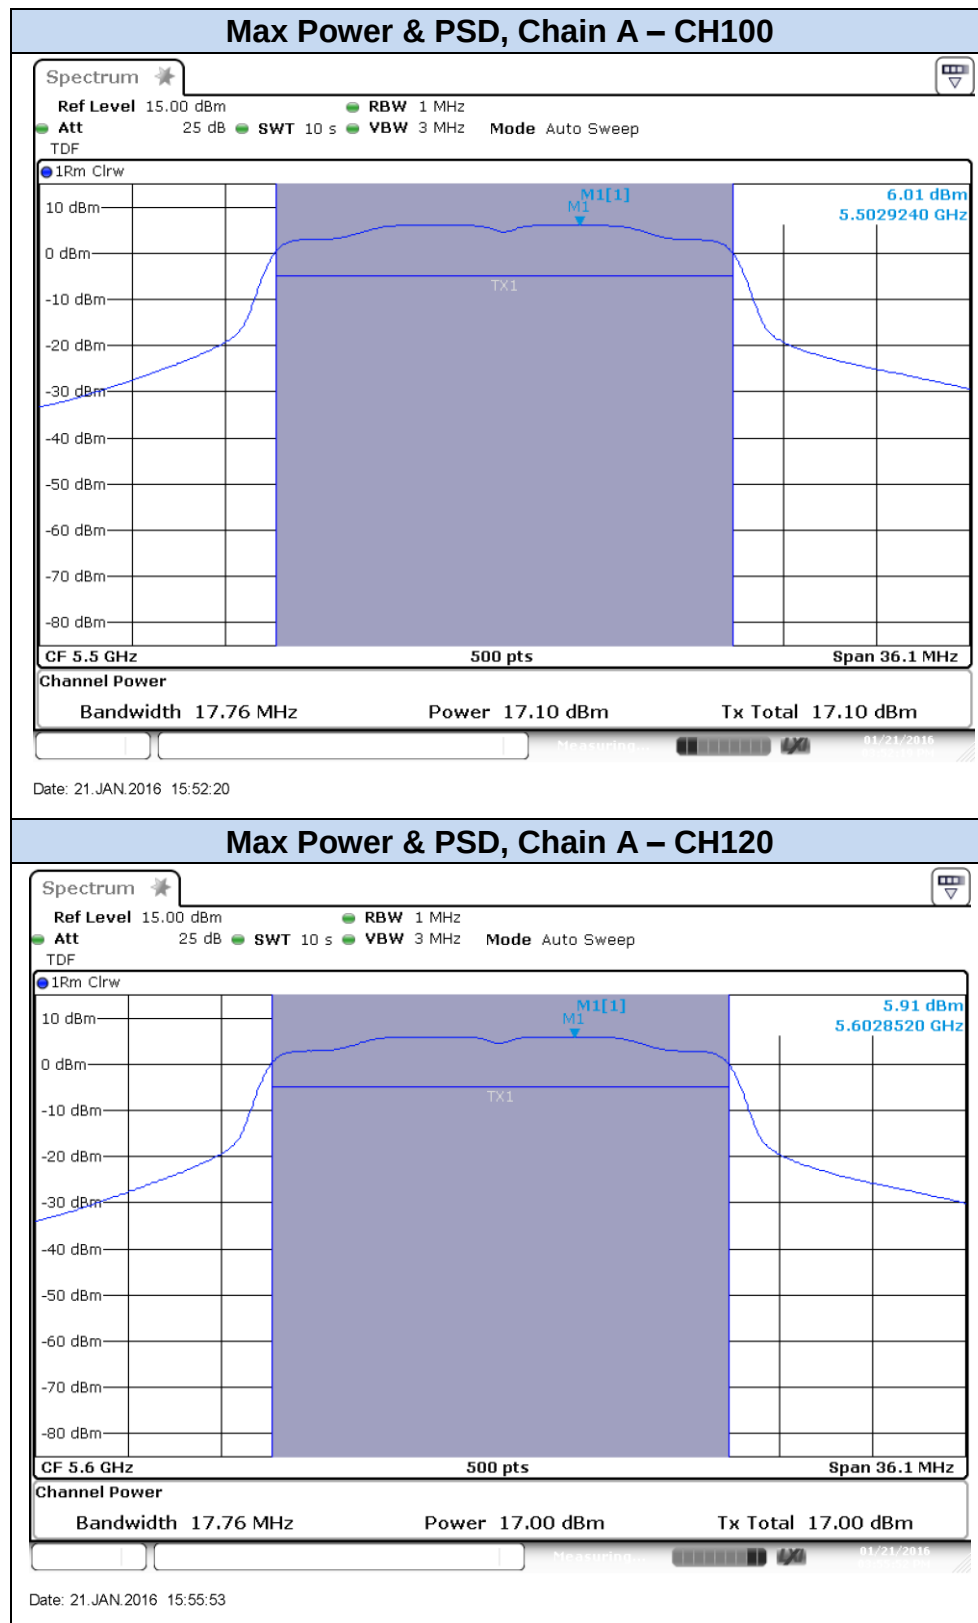


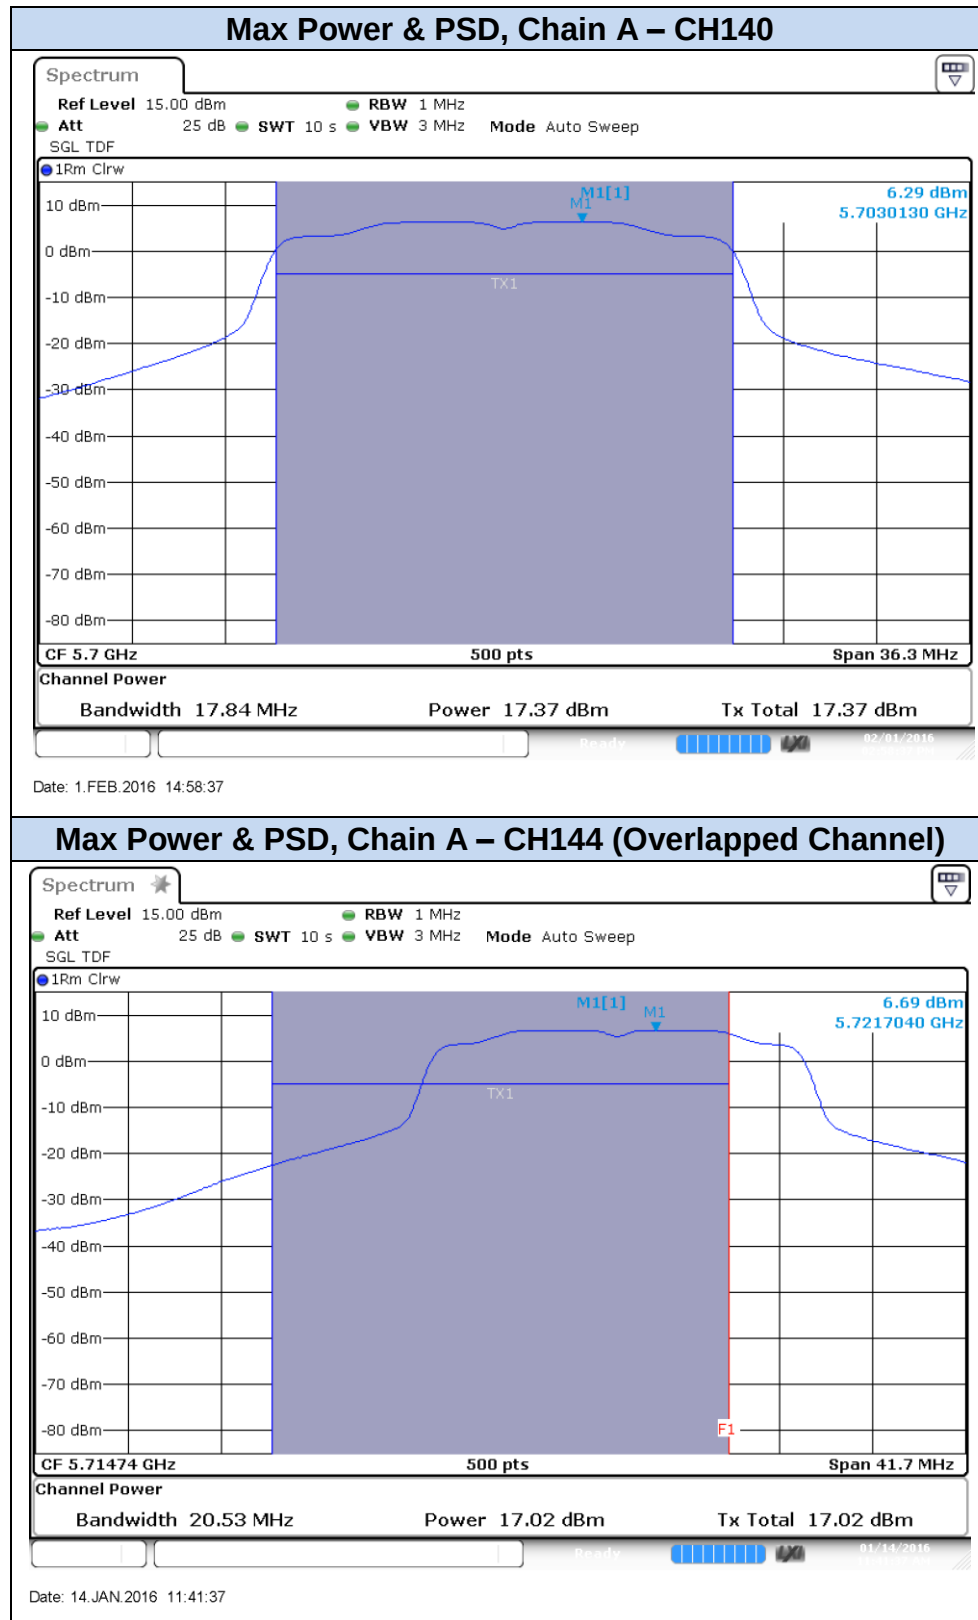



802.11n40, HT0

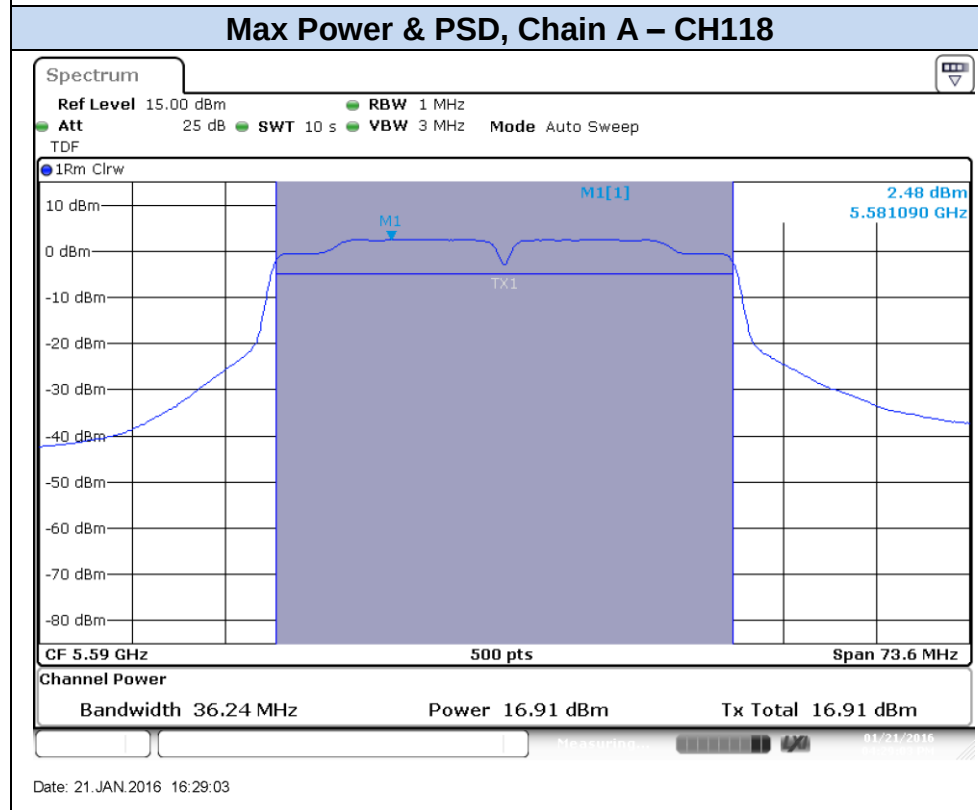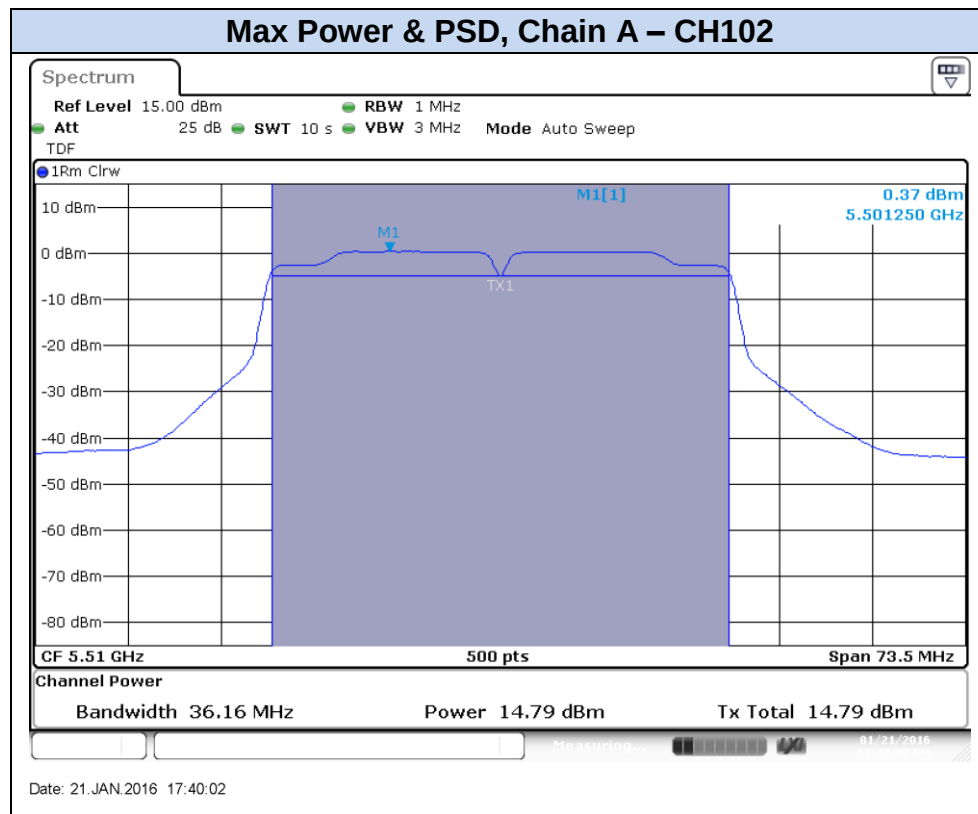

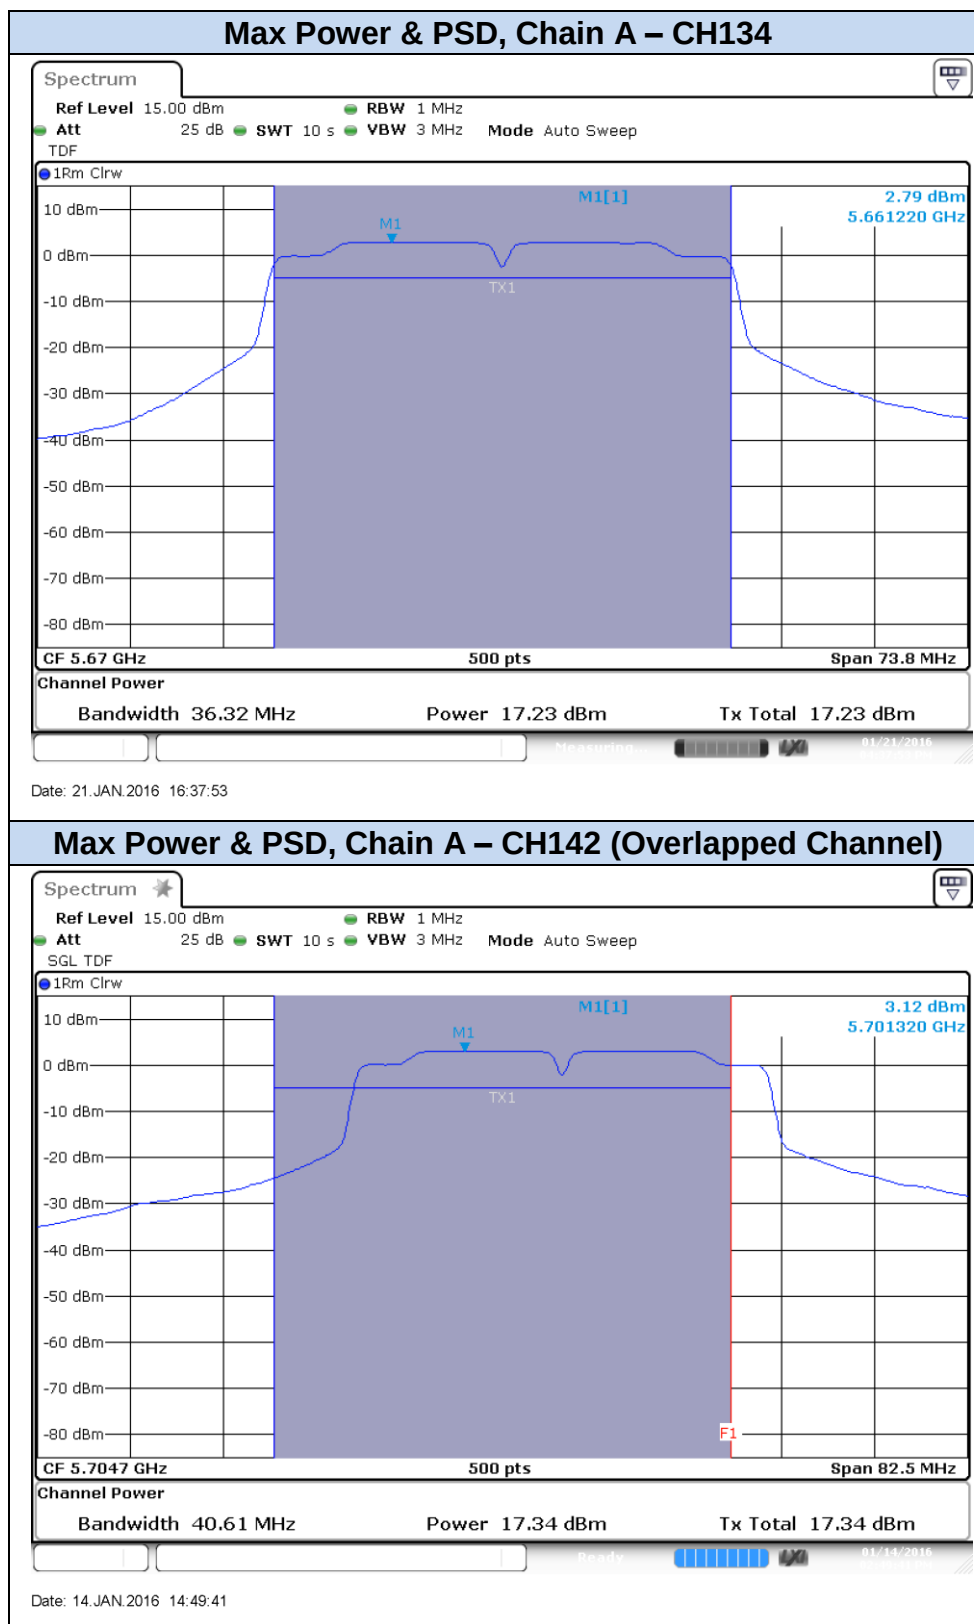

802.11ac80, VHT0 (SISO)

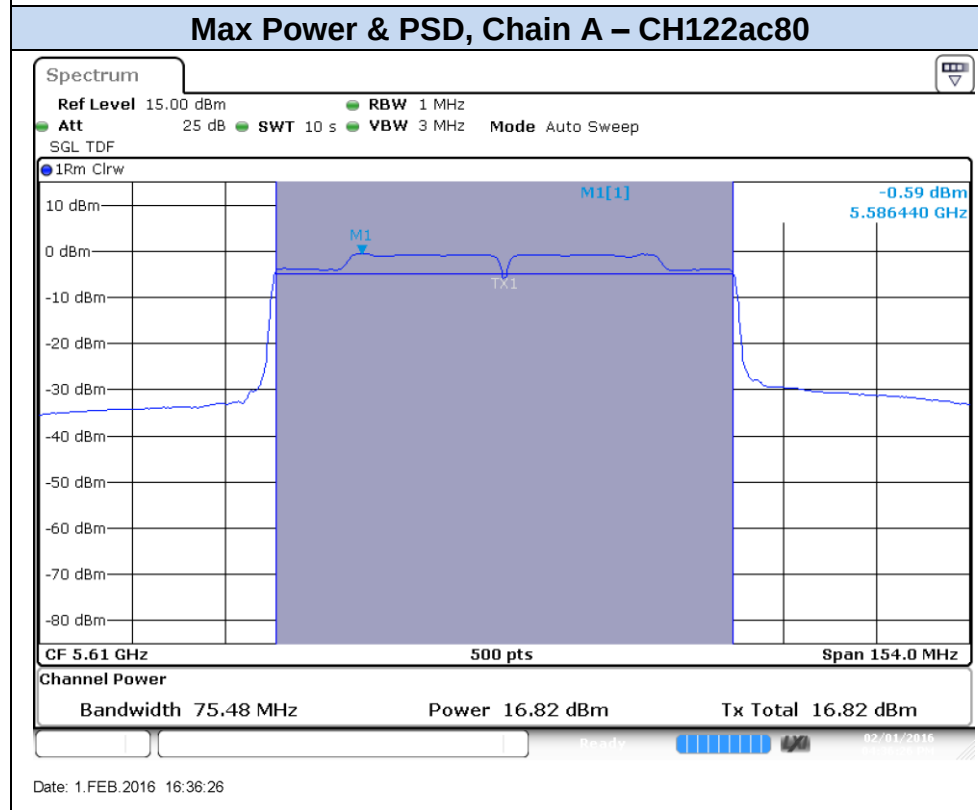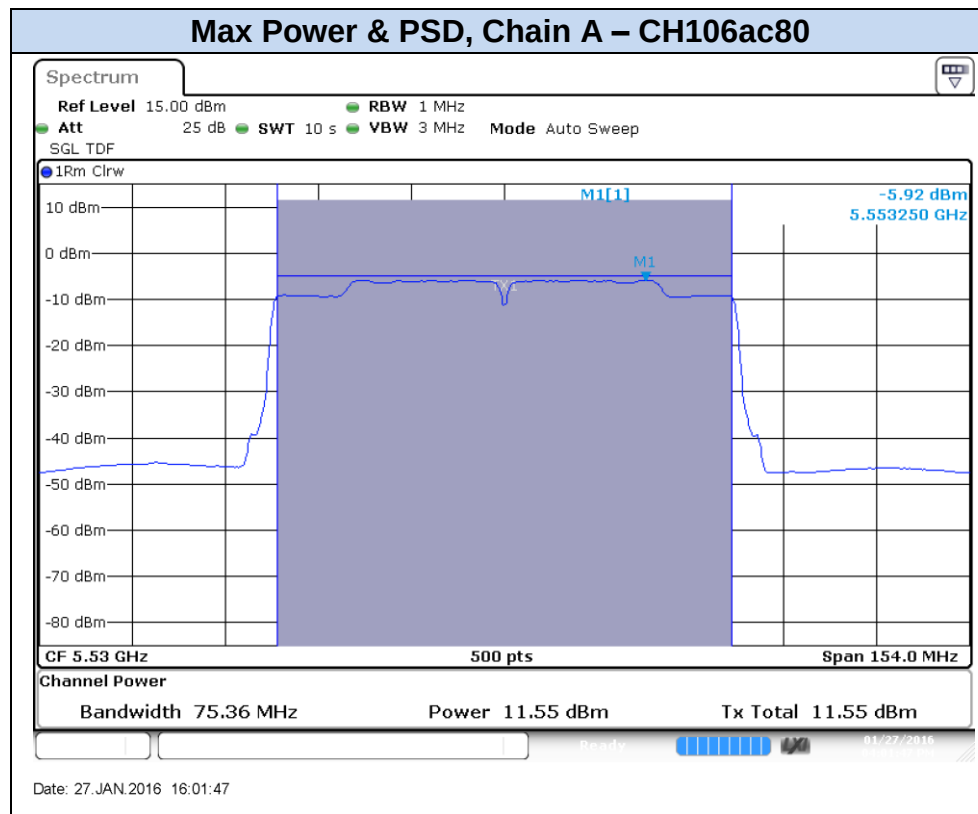

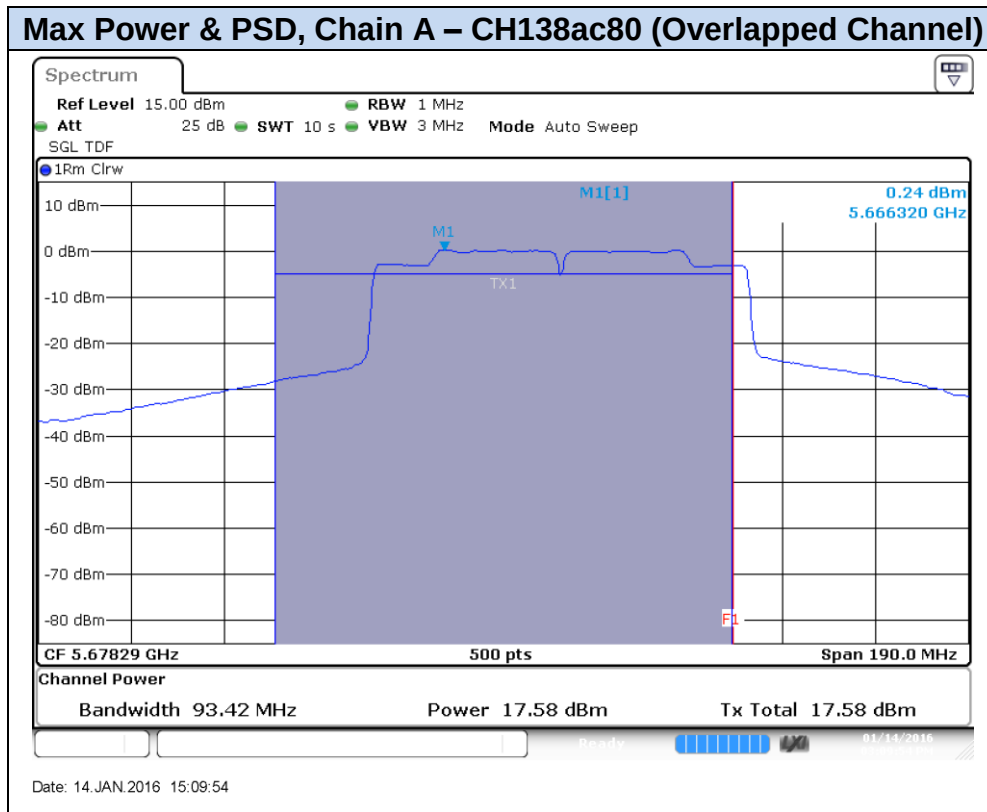

D.3 Undesirable emissions limits: Band Edge (conducted)

Test limits:

FCC part	RSS Part	Limits			
15.407 (b) (3)	RSS-247 Clause 6.2.3 (2)	For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.			
15.209	RSS-247 Clause 6.2.3 (2)	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):			
		Freq Range (MHz)	Field Stregh (μV/m)	Field Stregh (dBμV/m)	Meas. Distance (m)
		0.009-0.490	2400/f(kHz)	-	300
		0.490-1.705	24000/f(kHz)	-	300
		1.705-30.0	30	-	30
		30-88	100	40	3
		88-216	150	43.5	3
		216-960	200	46	3
		960-25000	500	54	3
		The emission limits shown in the table above are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.			

Test procedure:

The setup below was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared Antenna Gain.


For the BE low RMS, we use the Video Bandwidth Method according to point G) 6) (KDB 789033 D02)

➔ When the duty cycle is > 98 %, we set VBW=10Hz

➔ When the duty cycle is < 98 %, we set VBW > 1/T, where T is defined in section II.B.1.a

In case of Band Edge measurements falling in restricted bands, the declared Antenna Gain is also compensated in the graph.

The declared maximum antenna gain is 5dBi.

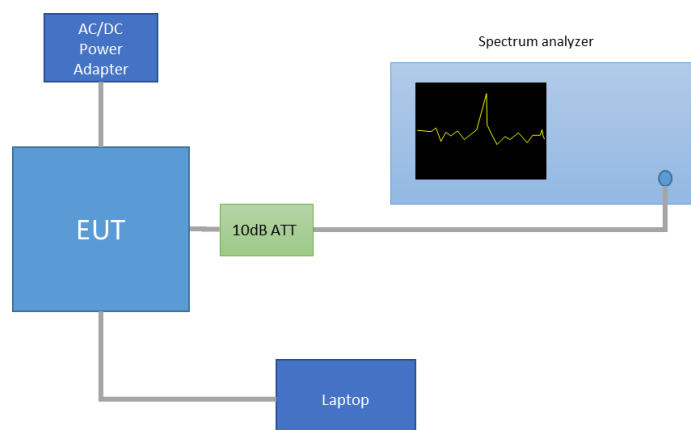



The following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dB μ V/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
960-25000	3	500	53.98	-41.2



Results Screenshot:


802.11a, 6Mbps – Chain A

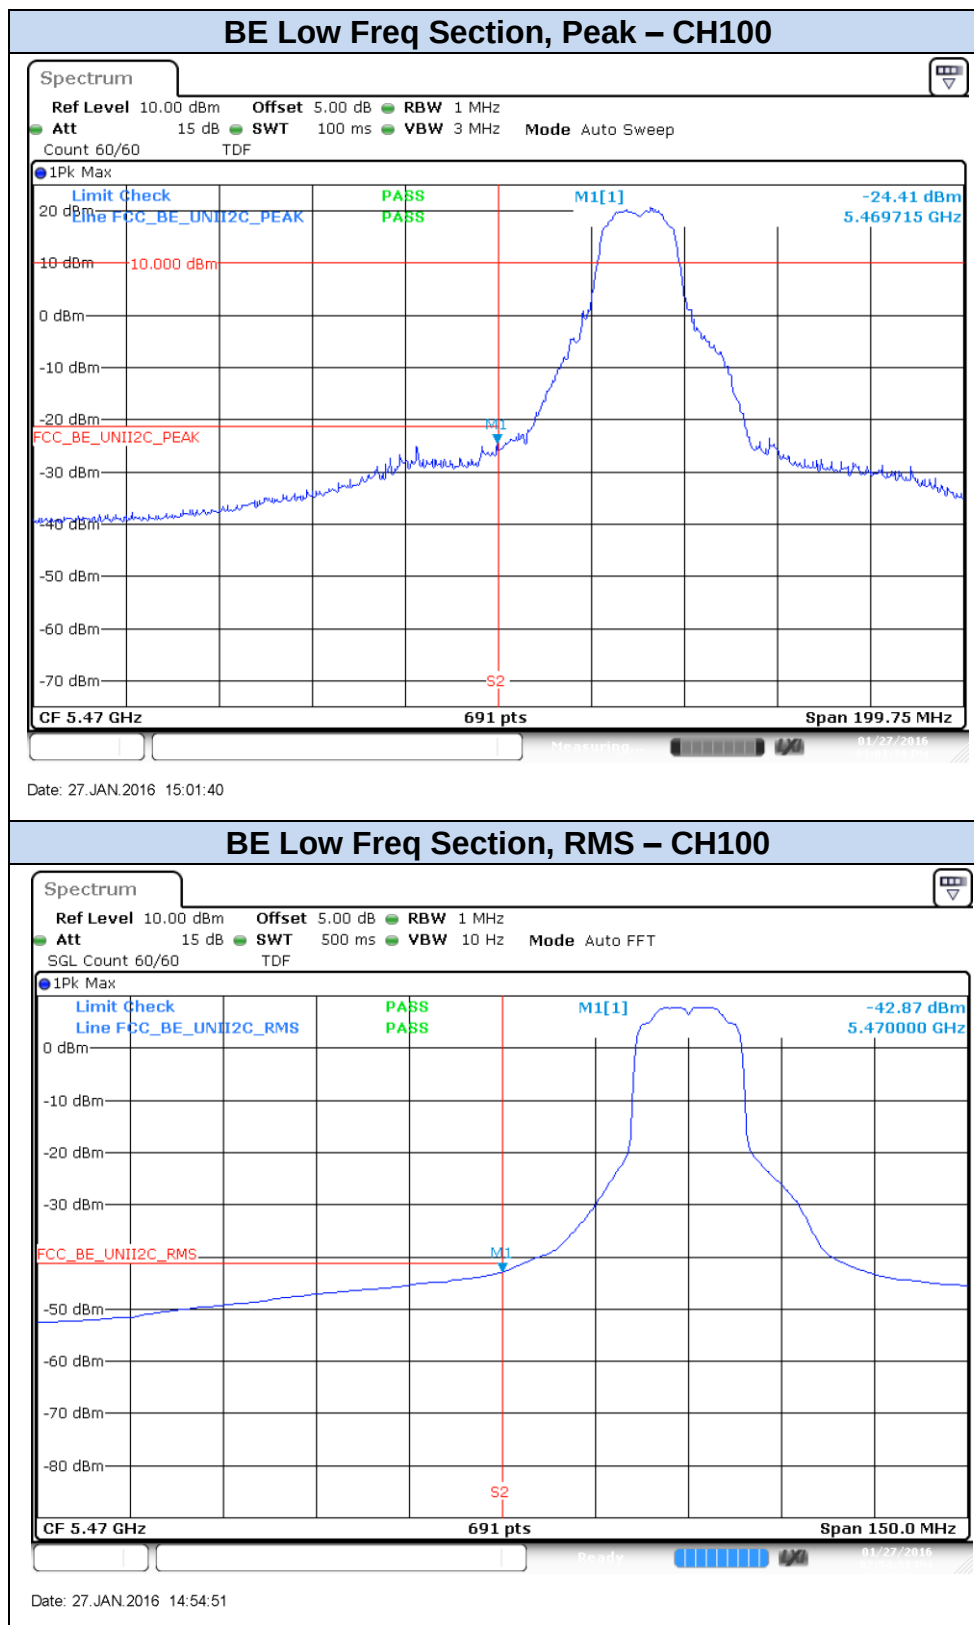

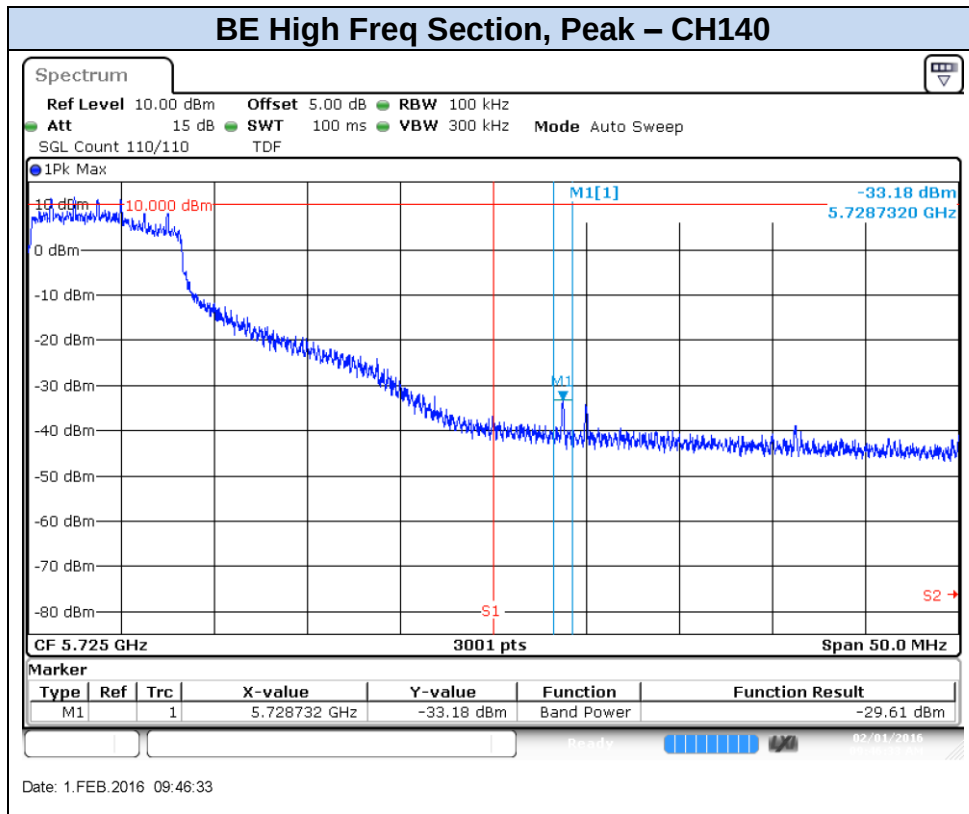



802.11n20, HT0 – Chain A

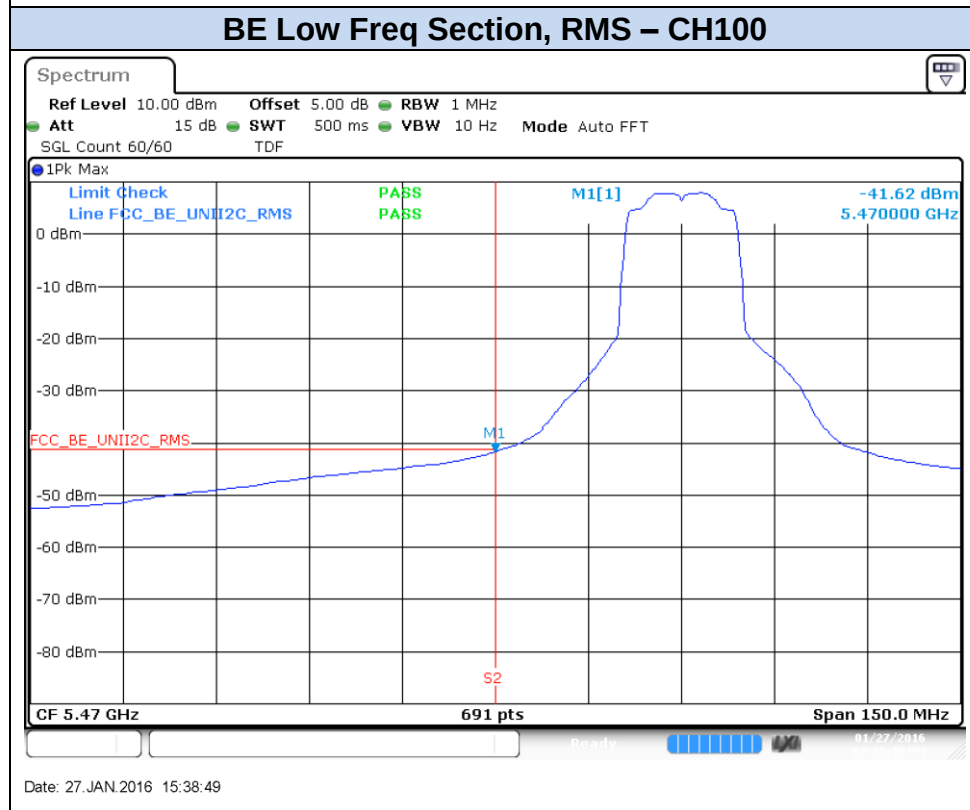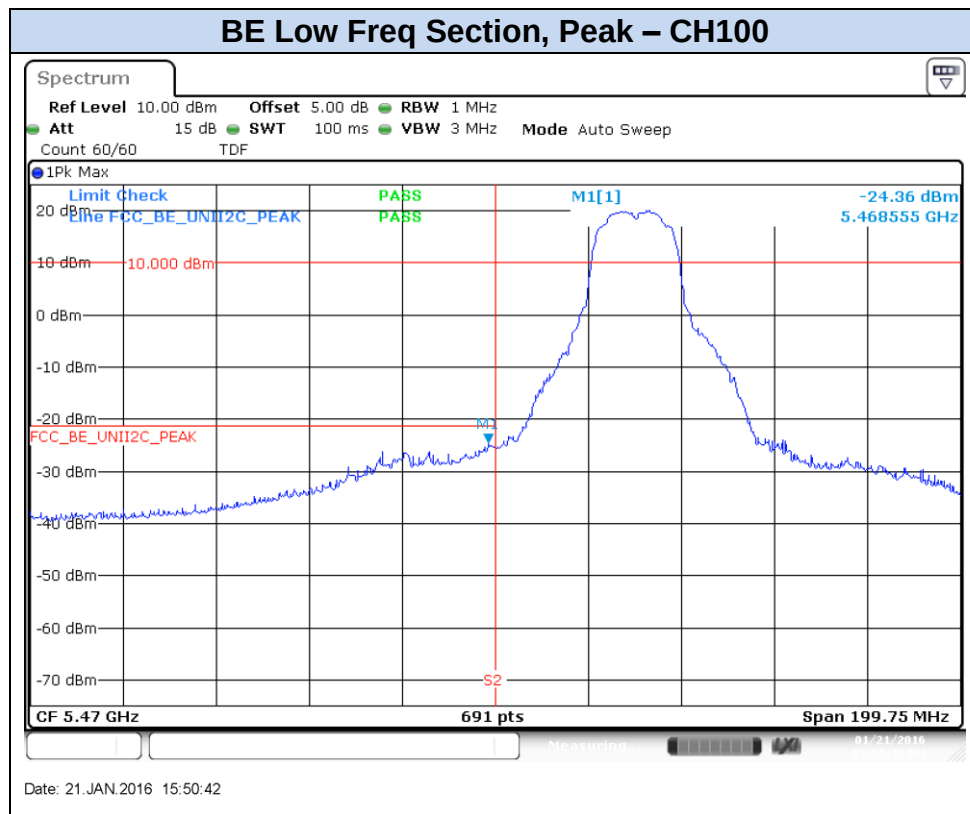

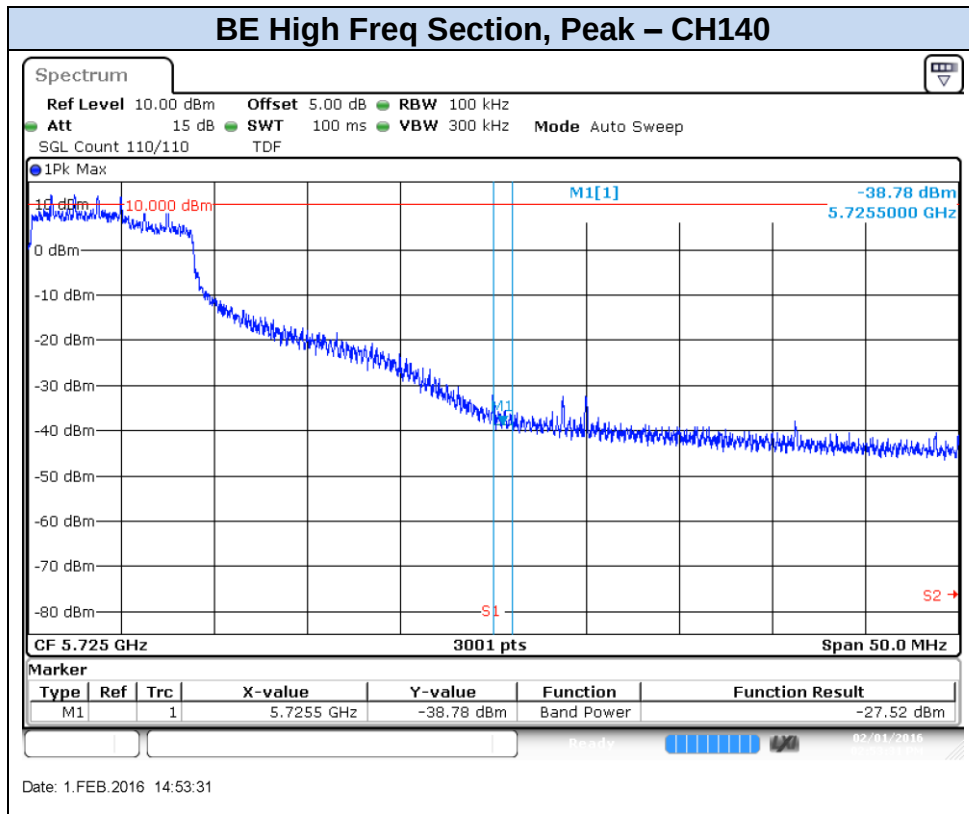



802.11n40, HT0 – Chain A

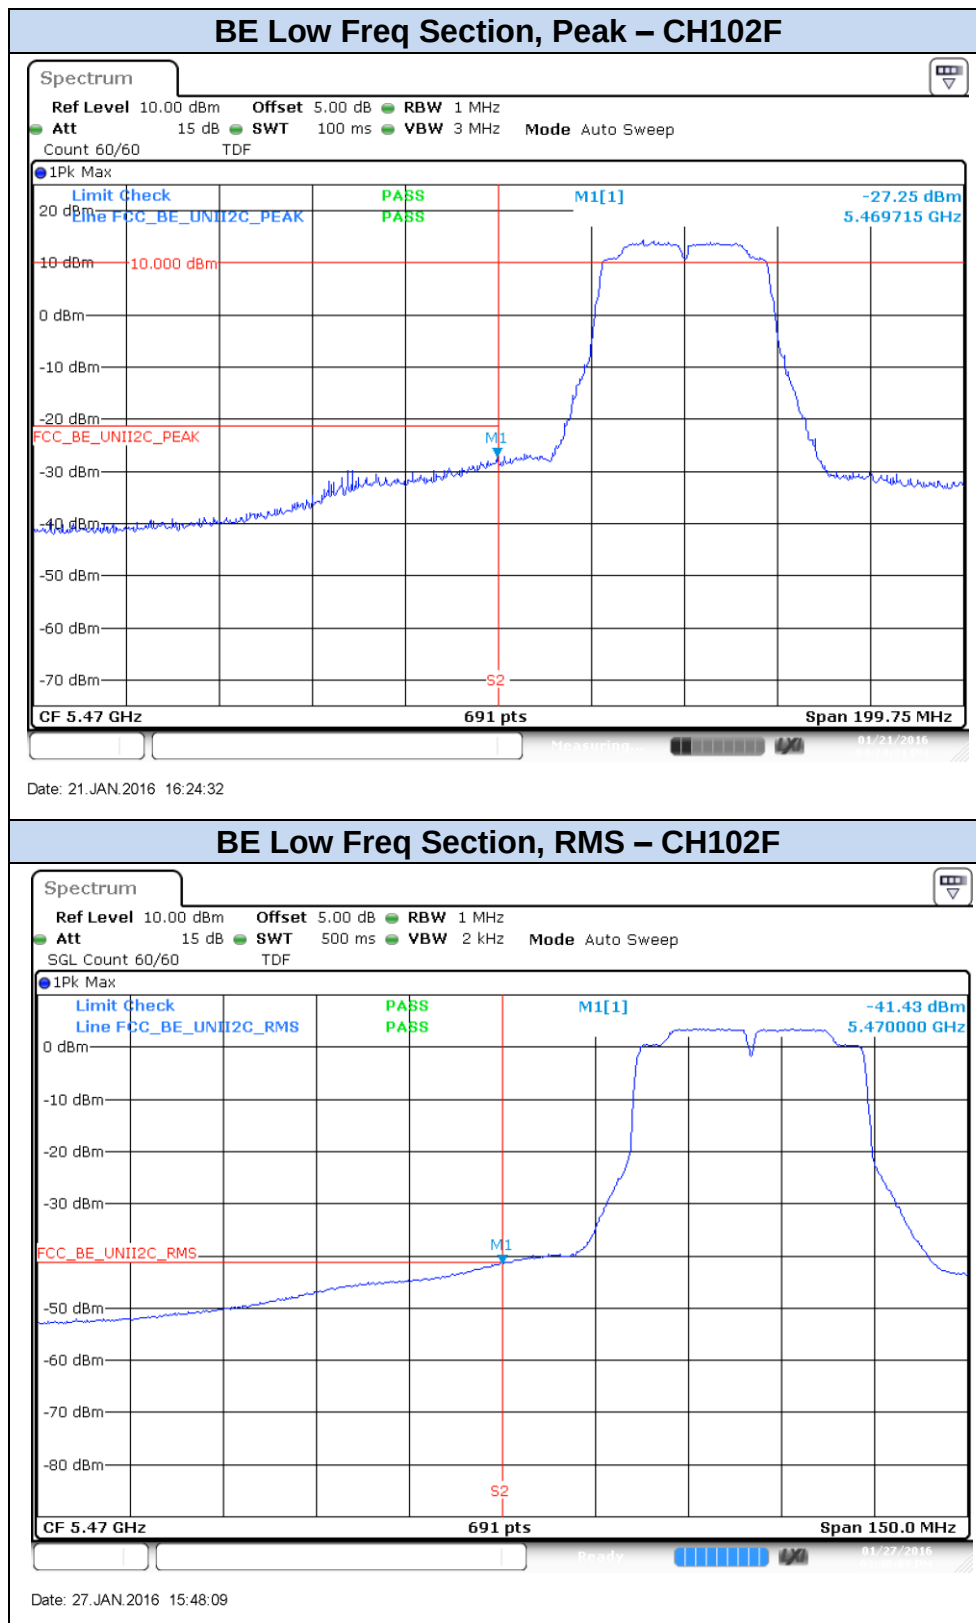

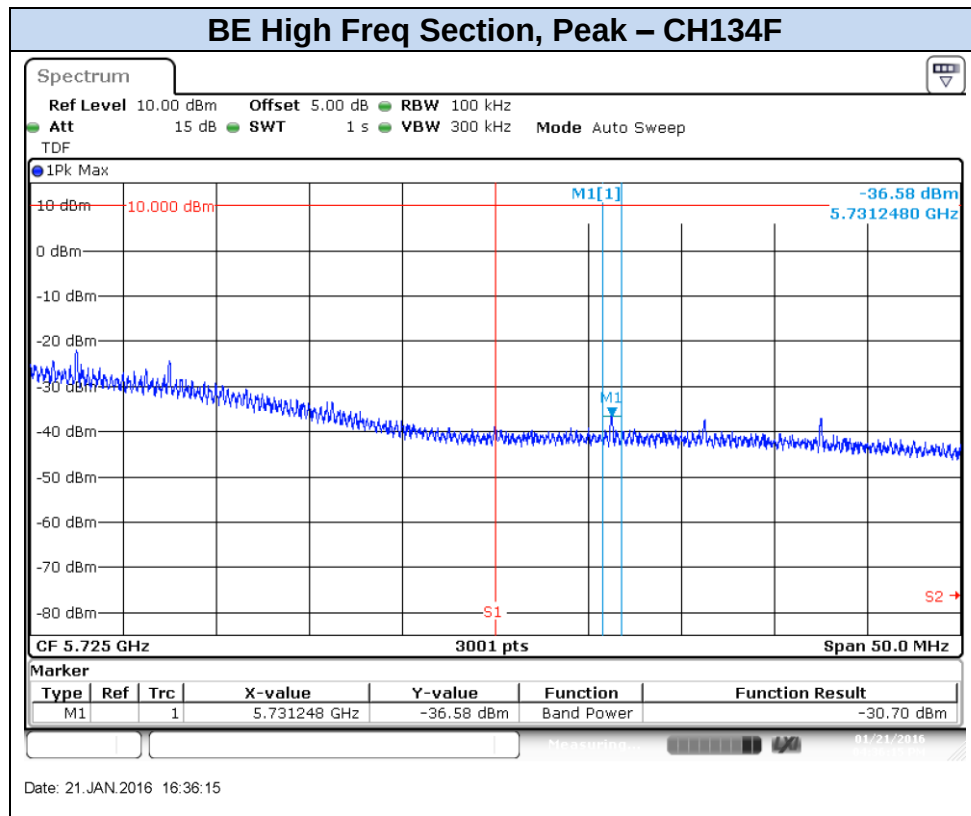

802.11ac80, VHT0 – Chain A

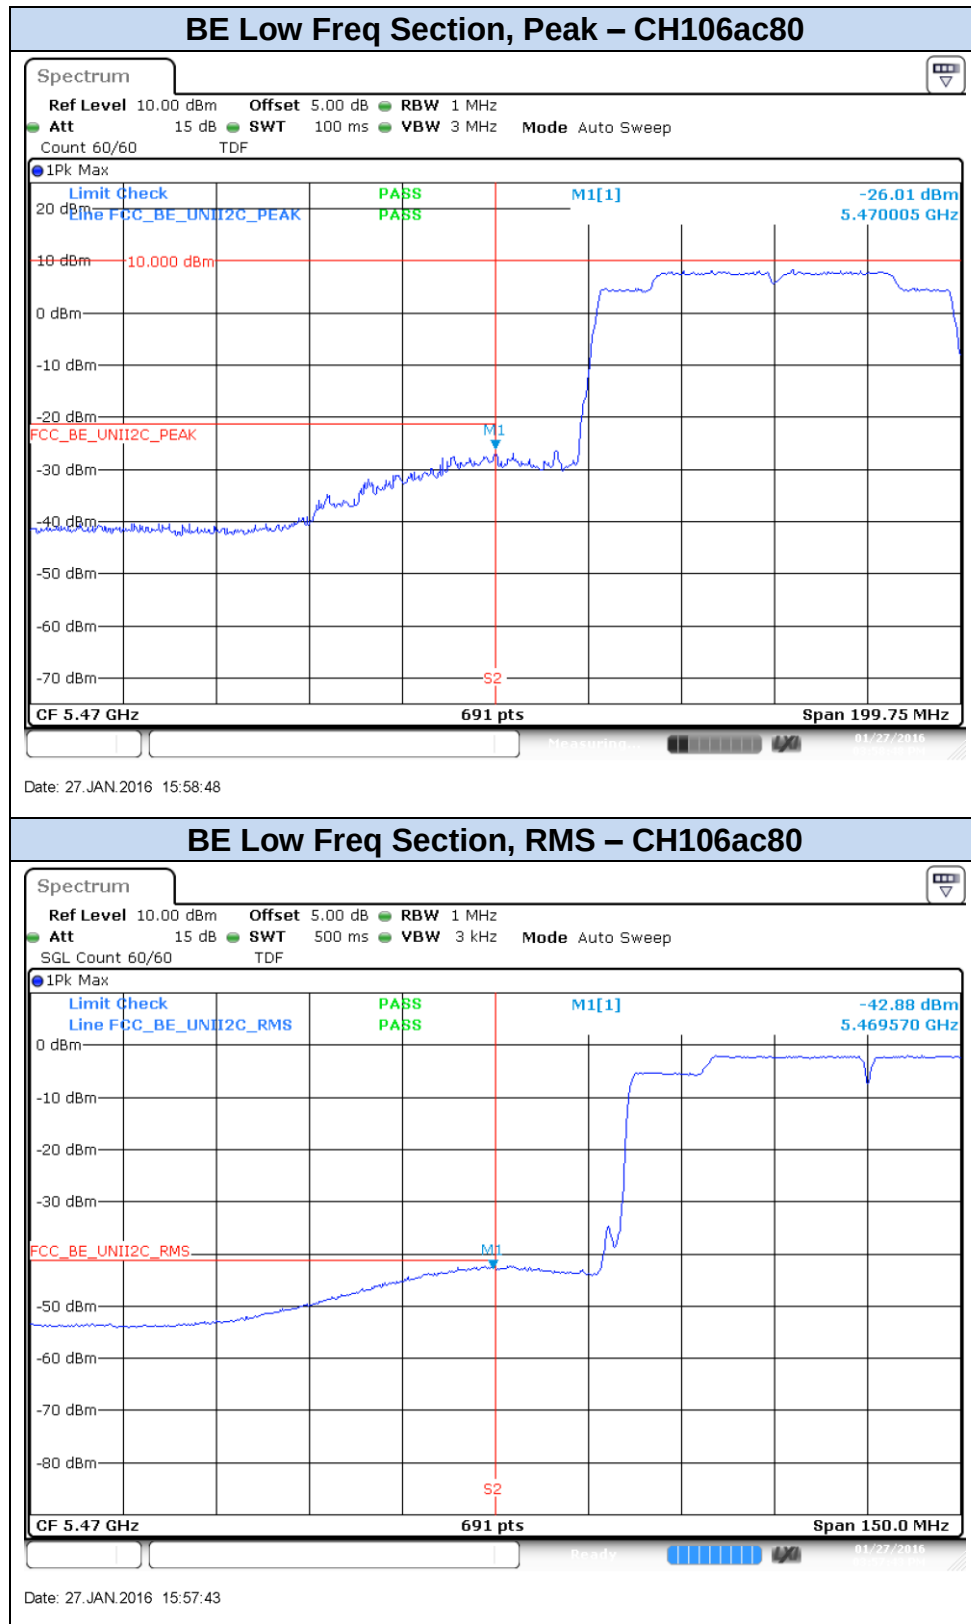

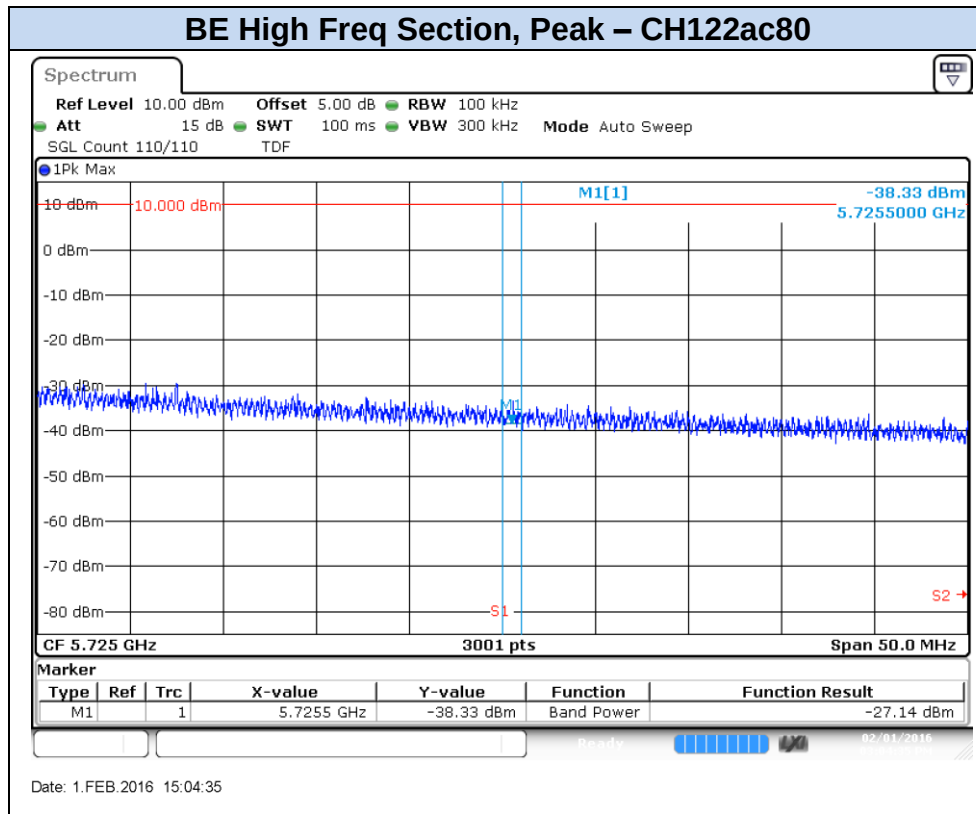

D.4 Radiated spurious emission

Standard references:

FCC part	RSS part	Limits			
15.407 (b) (3) 15.209	RSS-247 Clause 6.2.3 (2)	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):			
		Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)
		0.009-0.490	2400/f(kHz)	-	300
		0.490-1.705	24000/f(kHz)	-	300
		1.705-30.0	30	-	30
		30-88	100	40	3
		88-216	150	43.5	3
		216-960	200	46	3
		Above 960	500	54	3
		The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.			

Test procedure:

The below setups were used to measure the radiated spurious emissions.


Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height from 1 to 4 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.


The radiated spurious emissions were measured on the worst case configuration selected from the chapter 0

Power Limits. Maximum Output power & Peak power spectral density and using the lowest, middle and highest channels.


Radiated Setup < 1GHz

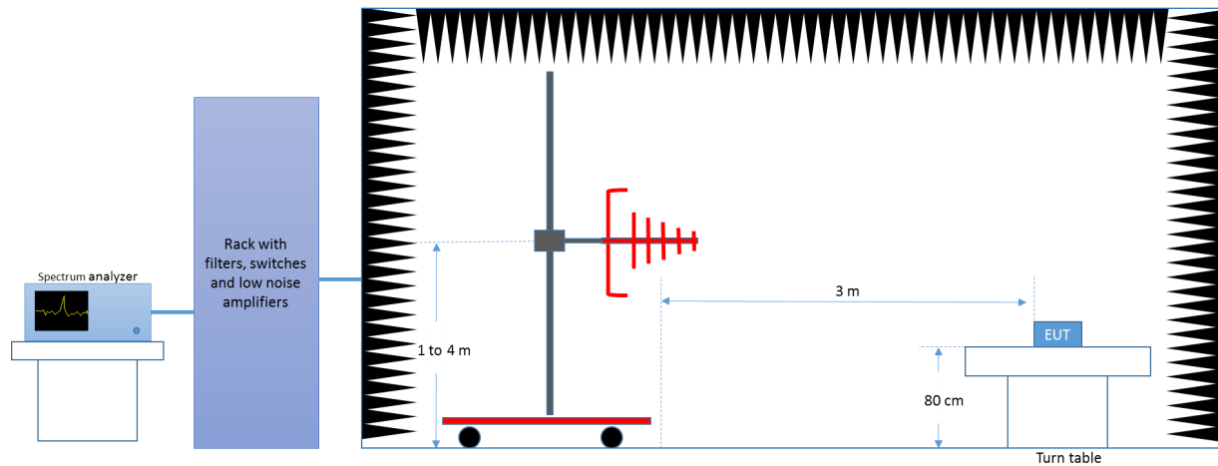

Radiated Setup 1 GHz - 18 GHz

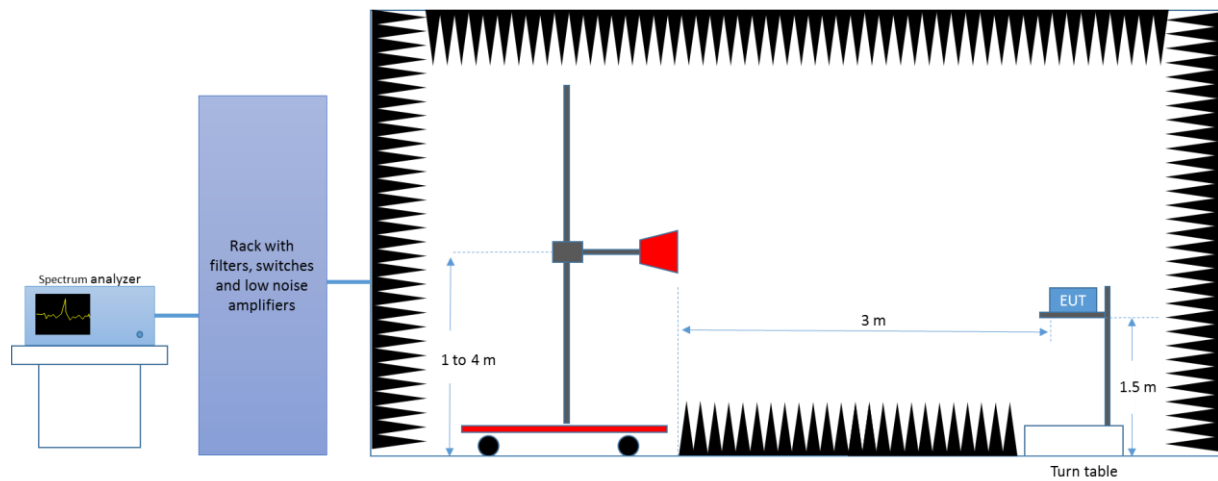


Radiated Setup > 18 GHz

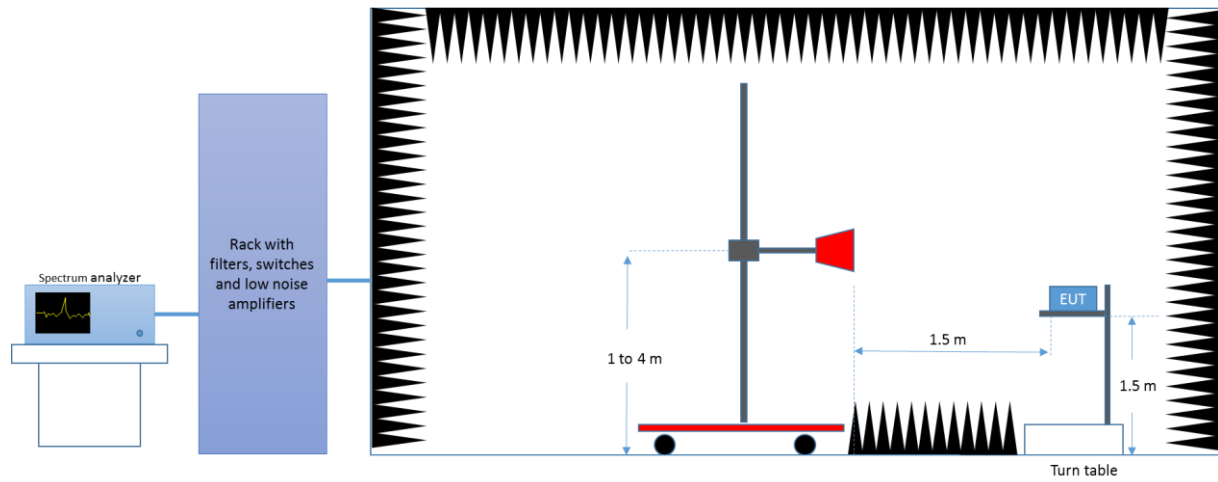

Test Results:

Radiated Spurious – 30MHz to 1GHz

Radiated Spurious – All modes

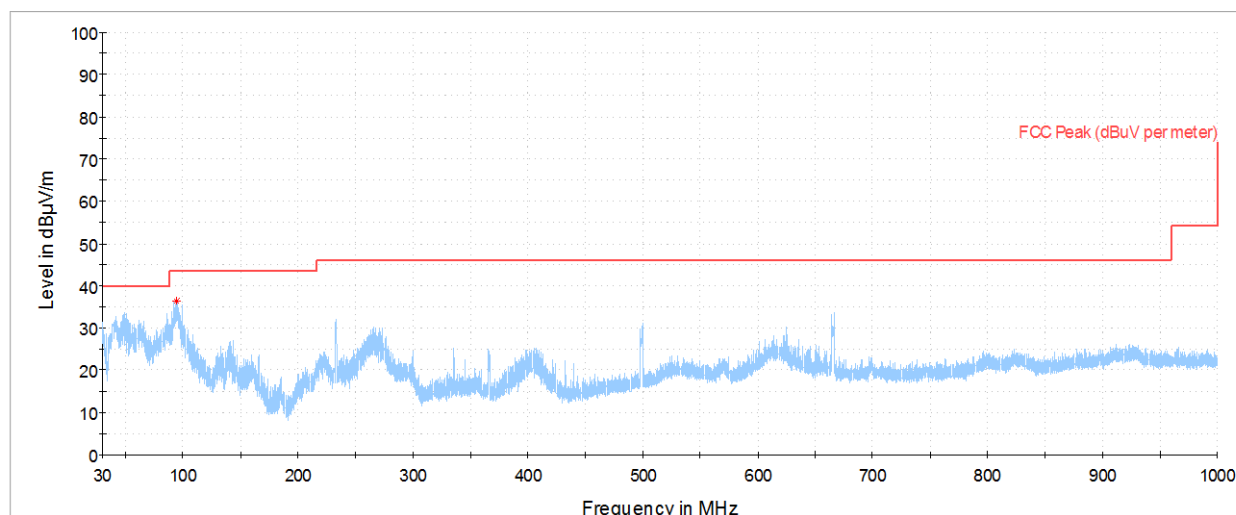


— Peak measurements — Limit FCC Peak

Frequency	MaxPeak	Limit	Margin
MHz	dBm	dBm	dB
94.87	36.40	43.56	7.15

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

1 GHz – 26.5GHz, 802.11a, Chain A

Radiated Spurious – CH100

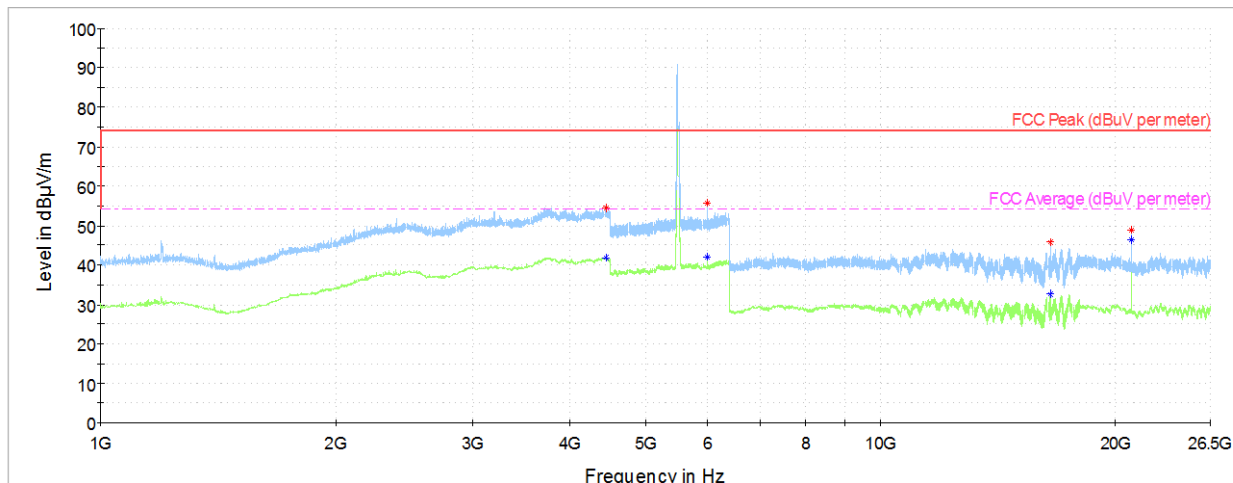

Peak measurements


AVG measurements

Limit FCC Peak

Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4444.00	---	41.74	54.06	12.32
4452.75	54.42	---	74.06	19.63
5995.56	---	41.92	54.06	12.13
5996.34	55.70	---	74.06	18.36
16501.86	---	32.76	54.06	21.30
16504.18	45.89	---	74.06	28.16
20959.93	48.76	---	74.06	25.30
20959.93	---	46.38	54.06	7.68


Radiated Spurious – CH120

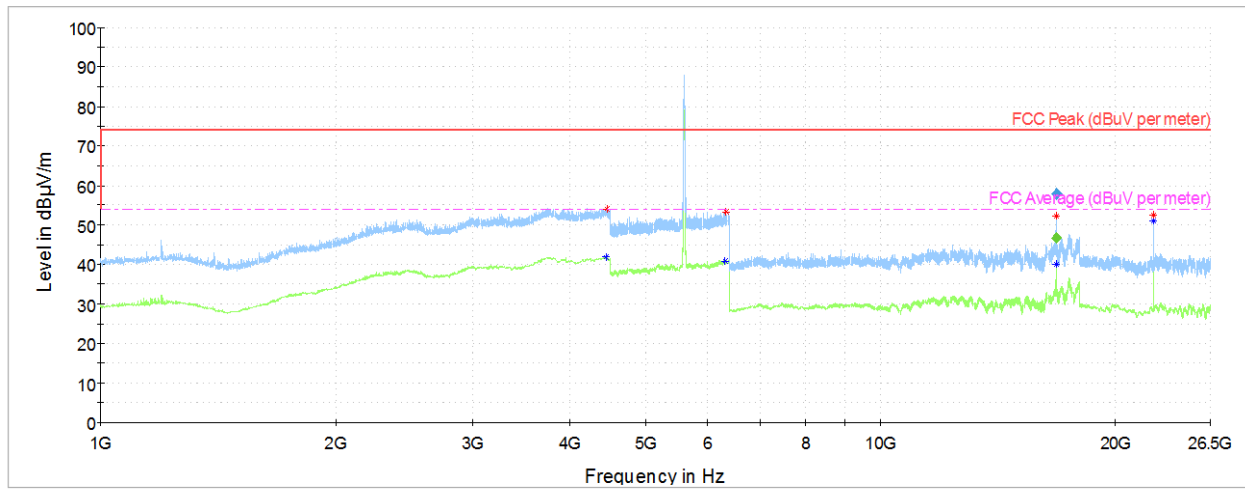

— Peak measurements
 — AVG measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4452.75	---	41.77	54.06	12.29
4458.44	54.13	---	74.06	19.92
6322.36	---	40.91	54.06	13.14
6344.21	53.18	---	74.06	20.88
16799.40	---	40.22	54.06	13.83
16806.36	52.37	---	74.06	21.69
22399.91	---	50.94	54.06	3.12
22399.91	52.49	---	74.06	21.57

Radiated Spurious – CH140

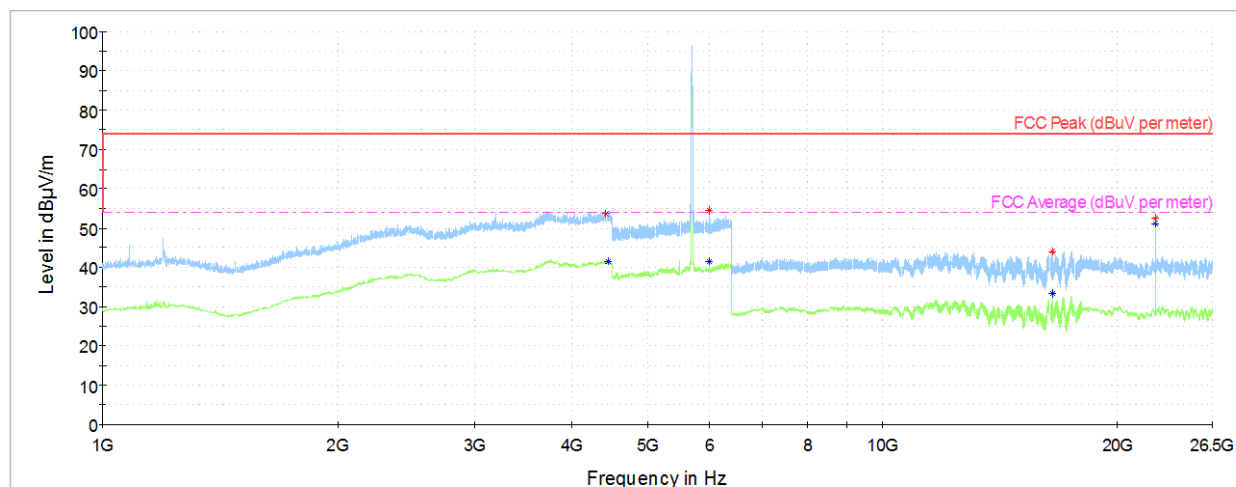


— Peak measurements
 — AVG measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4416.44	53.68	---	74.06	20.38
4451.88	---	41.41	54.06	12.65
5992.45	---	41.36	54.06	12.70
5999.10	54.47	---	74.06	19.59
16495.48	44.02	---	74.06	30.04
16504.76	---	33.43	54.06	20.63
22399.91	52.40	---	74.06	21.66
22399.91	---	51.09	54.06	2.97

1 GHz – 26.5GHz, 802.11n20, Chain A

Radiated Spurious – CH100

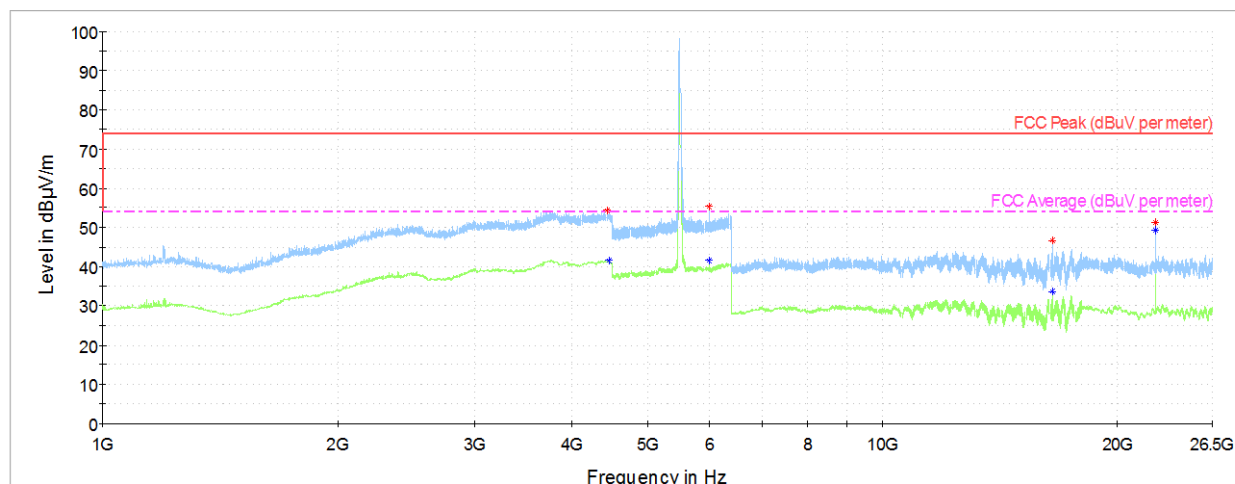
 Peak measurements


 AVG measurements

 Limit FCC Peak

 Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4428.25	54.40	---	74.06	19.66
4454.06	---	41.64	54.06	12.41
5991.41	---	41.66	54.06	12.40
5993.05	55.35	---	74.06	18.70
16498.38	---	33.65	54.06	20.41
16504.76	46.78	---	74.06	27.28
22399.91	---	49.31	54.06	4.75
22399.91	51.29	---	74.06	22.76


Radiated Spurious – CH120

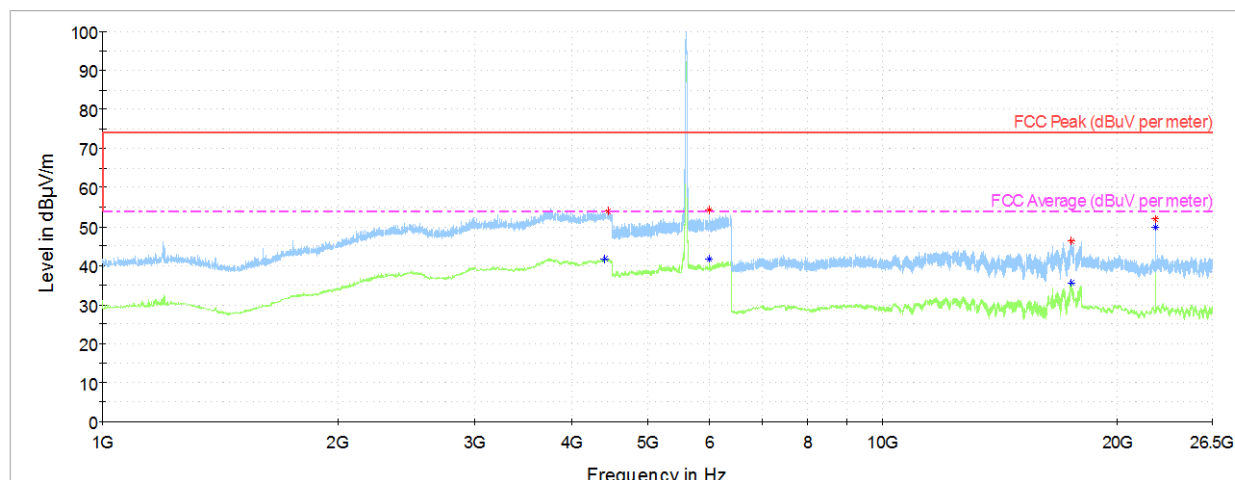

— Peak measurements
 — AVG measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency MHz	MaxPeak dBuV/m	Avg dBuV/m	Limit dBuV/m	Margin dB
4406.38	---	41.65	54.06	12.40
4447.50	53.94	---	74.06	20.12
5988.05	54.28	---	74.06	19.78
5990.46	---	41.75	54.06	12.30
17477.42	46.40	---	74.06	27.66
17483.22	---	35.56	54.06	18.50
22399.91	---	49.93	54.06	4.13
22399.91	51.90	---	74.06	22.16

Radiated Spurious – CH140

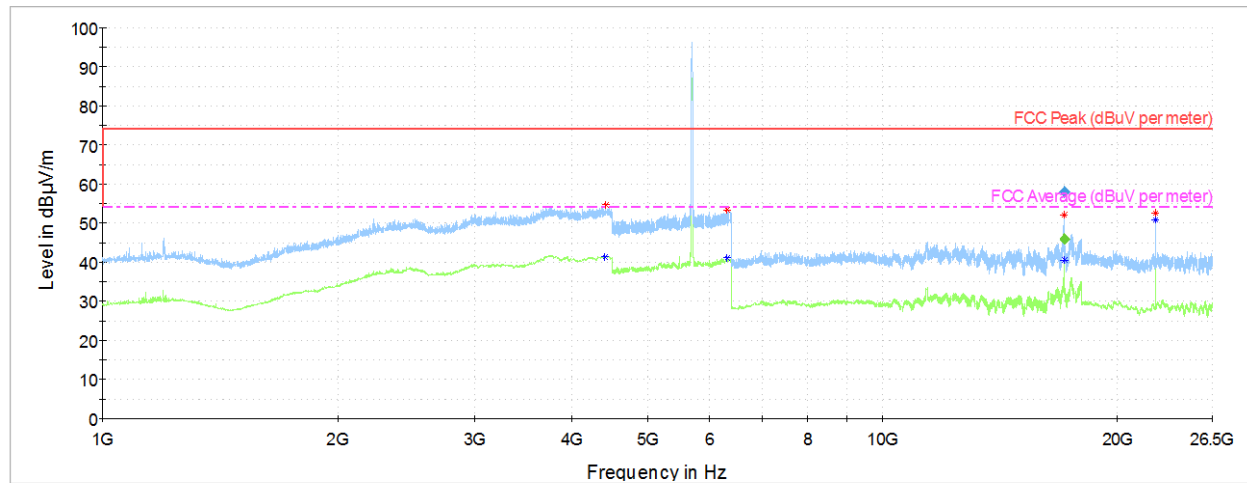


— Peak measurements
 — AVG measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4405.50	---	41.29	54.06	12.77
4423.88	54.51	---	74.06	19.55
6319.25	---	40.95	54.06	13.11
6322.10	53.42	---	74.06	20.64
17098.68	---	40.59	54.06	13.46
17102.16	52.04	---	74.06	22.02
22399.91	---	50.81	54.06	3.25
22399.91	52.50	---	74.06	21.56

1 GHz – 26.5GHz, 802.11n40, Chain A

Radiated Spurious – CH102F

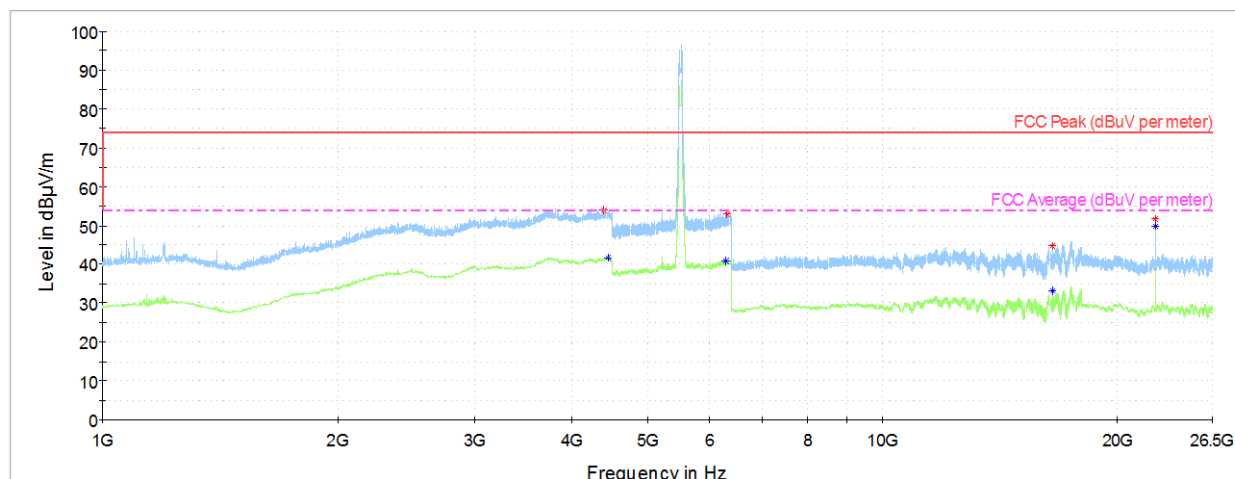
 Peak measurements


 AVG measurements

 Limit FCC Peak

 Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4400.69	54.09	---	74.06	19.97
4446.63	---	41.68	54.06	12.38
6299.39	---	40.98	54.06	13.08
6315.02	52.93	---	74.06	21.13
16534.92	44.82	---	74.06	29.23
16537.24	---	33.23	54.06	20.83
22399.91	---	49.98	54.06	4.08
22399.91	51.64	---	74.06	22.42


Radiated Spurious – CH118F

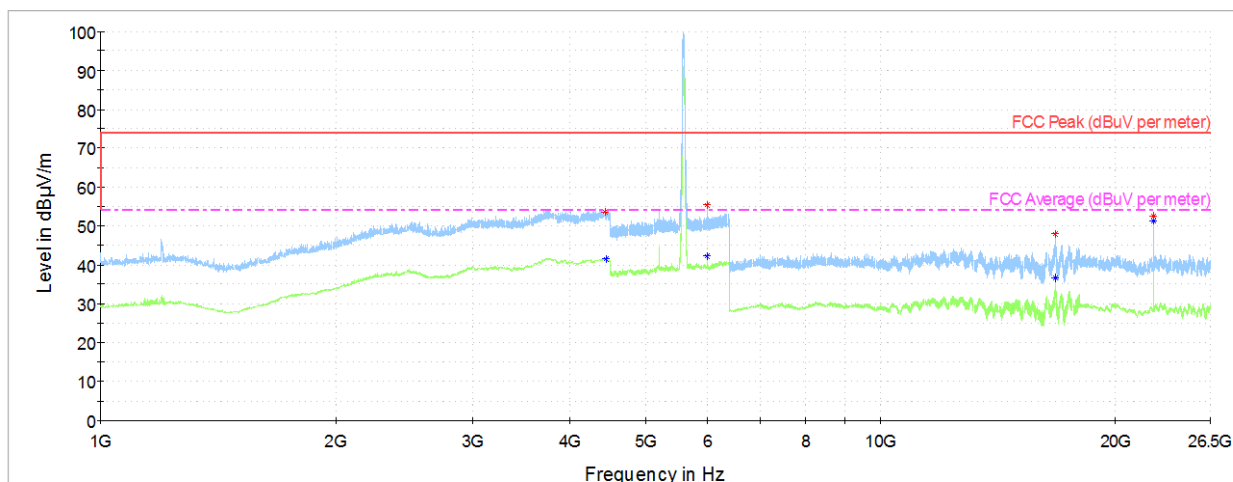

— Peak measurements
 — AVG measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4437.00	53.67	---	74.06	20.39
4451.88	---	41.61	54.06	12.45
5990.81	55.50	---	74.06	18.55
5996.25	---	42.37	54.06	11.69
16753.58	47.88	---	74.06	26.17
16762.28	---	36.62	54.06	17.44
22399.91	---	51.20	54.06	2.86
22399.91	52.51	---	74.06	21.54

Radiated Spurious – CH134F

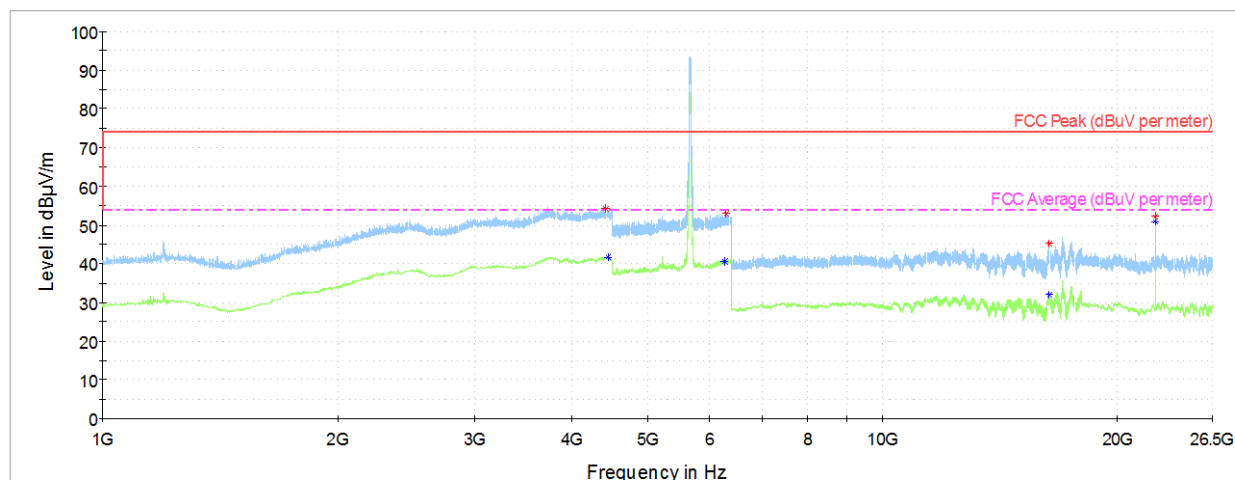


— Peak measurements
 — AVG measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency MHz	MaxPeak dBuV/m	Avg dBuV/m	Limit dBuV/m	Margin dB
4415.56	54.26	---	74.06	19.80
4443.13	---	41.65	54.06	12.40
6277.62	---	40.64	54.06	13.42
6294.55	52.89	---	74.06	21.17
16358.02	45.32	---	74.06	28.74
16358.60	---	32.14	54.06	21.92
22399.91	---	51.02	54.06	3.04
22399.91	52.32	---	74.06	21.74

1 GHz – 26.5GHz, 802.11ac80, Chain A

Radiated Spurious – CH106ac80

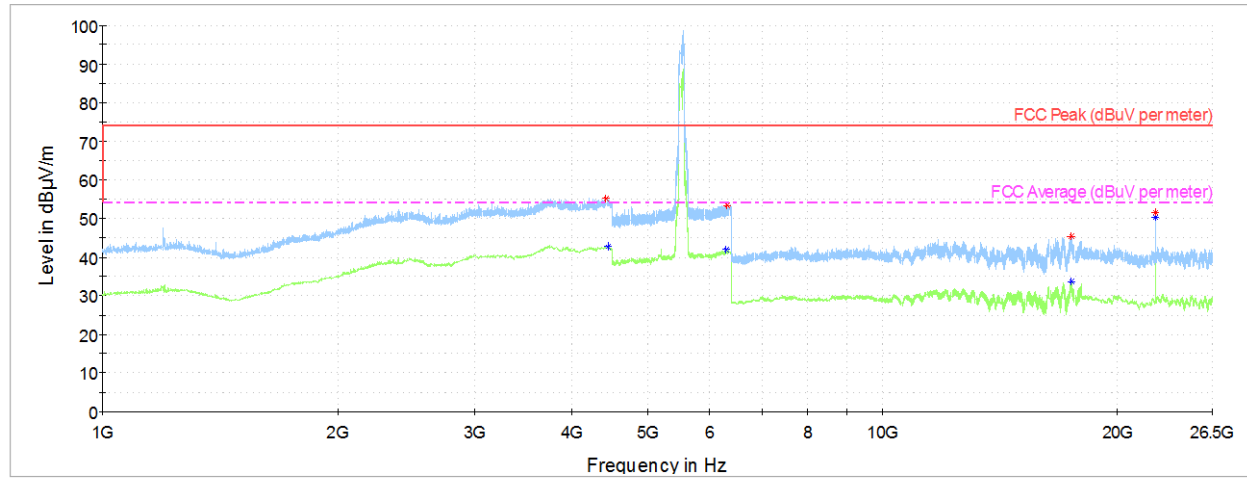

Peak measurements


AVG measurements

Limit FCC Peak

Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4414.69	55.10	---	74.06	18.96
4445.31	---	42.86	54.06	11.20
6309.84	---	42.01	54.06	12.05
6313.81	53.34	---	74.06	20.72
17480.32	45.24	---	74.06	28.82
17483.22	---	33.77	54.06	20.29
22399.91	51.60	---	74.06	22.46
22399.91	---	50.13	54.06	3.93


Radiated Spurious – CH122ac80

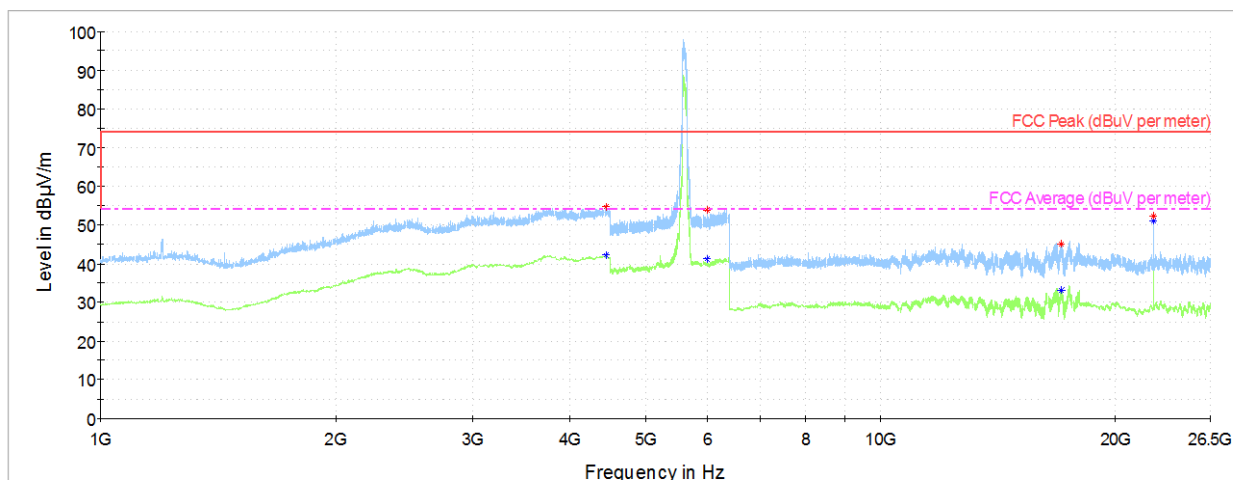

— Peak measurements
 — AVG measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency MHz	MaxPeak dBuV/m	Avg dBuV/m	Limit dBuV/m	Margin dB
4450.56	---	42.15	54.06	11.91
4453.63	54.75	---	74.06	19.31
5993.23	---	41.29	54.06	12.77
5997.80	53.88	---	74.06	20.18
17065.62	45.03	---	74.06	29.03
17071.42	---	33.08	54.06	20.98
22399.91	---	51.07	54.06	2.98
22399.91	52.36	---	74.06	21.70

Radiated Spurious – CH138ac80

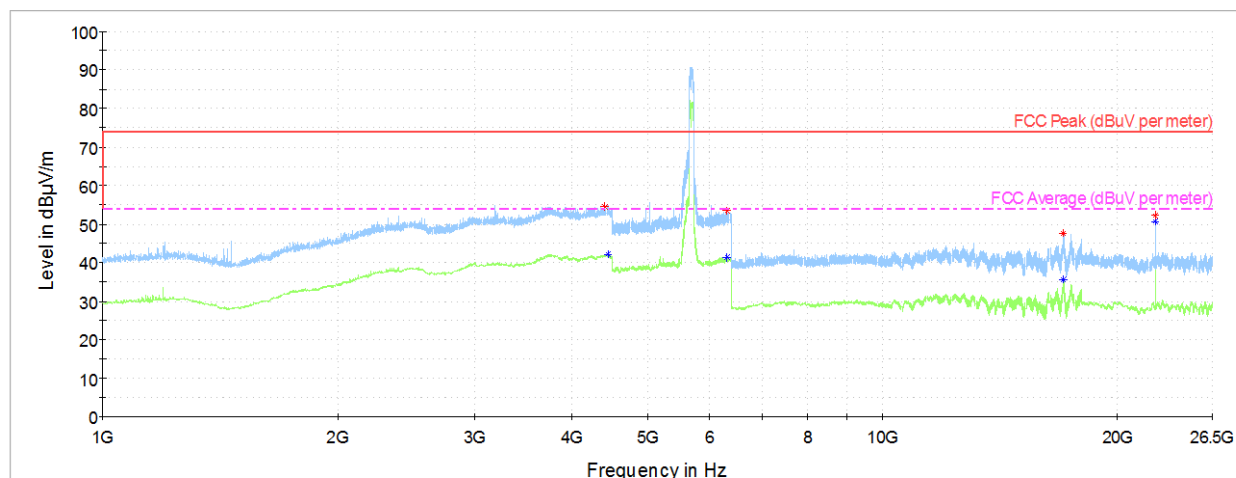


— Peak measurements
 — AVG measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4406.38	54.50	---	74.06	19.56
4446.63	---	42.00	54.06	12.05
6320.98	---	41.30	54.06	12.75
6321.84	53.52	---	74.06	20.54
17062.14	47.45	---	74.06	26.61
17072.58	---	35.50	54.06	18.56
22399.91	---	50.71	54.06	3.35
22399.91	52.27	---	74.06	21.79

26.5 GHz – 40GHz

Radiated Spurious – All modes

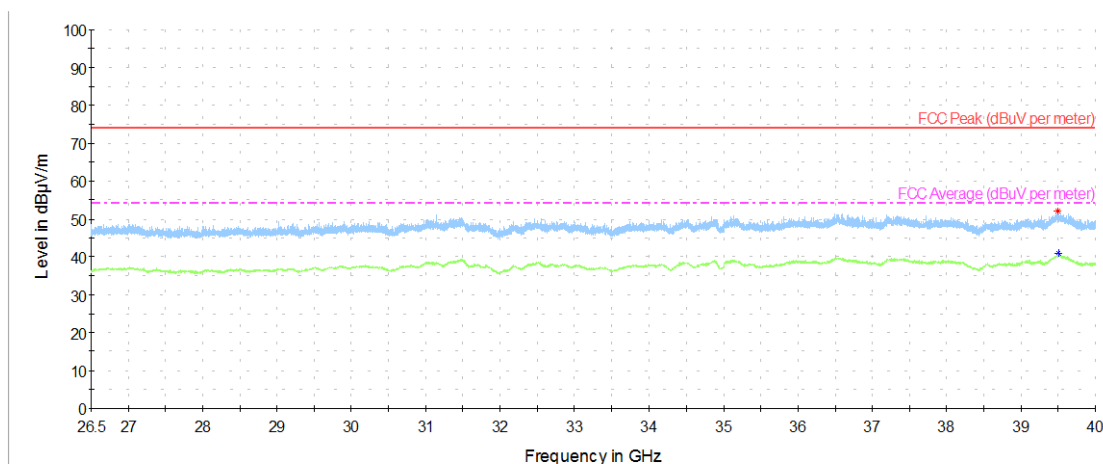

— Peak measurements
 — AVG measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
39496.87	51.94	---	74.06	22.12
39503.10	---	40.87	54.06	13.19

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.