


Main Antenna Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_18.52.45 .

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

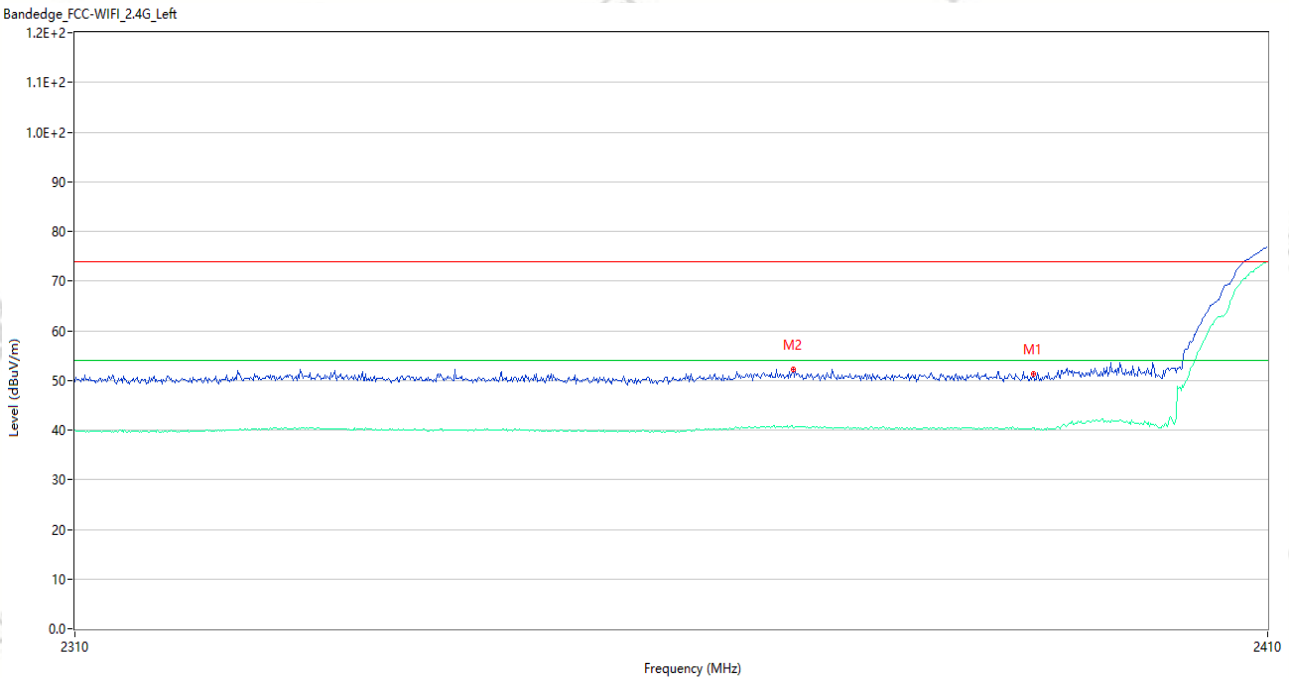

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.34	-4.87	74.0	22.66	Peak	347.76	150	Vertical	Pass
1**	2390.000	40.37	-4.87	54.0	13.63	AV	347.76	150	Vertical	Pass
2	2369.700	52.23	-4.04	74.0	21.77	Peak	300.00	150	Vertical	Pass
2**	2369.700	40.50	-4.04	54.0	13.50	AV	300.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_18.55.55

EUT Name: Rugged Tablet PC

Temp.(°C): 21.1

Model Number: M101Q9

Humidity (%RH): 42

Sample Number: CC2511399-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11b CH1 P=14

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.42	-4.87	74.0	23.58	Peak	286.98	150	Horizontal	Pass
1**	2390.000	40.21	-4.87	54.0	13.79	AV	286.98	150	Horizontal	Pass
2	2366.900	52.09	-4.34	74.0	21.91	Peak	69.00	150	Horizontal	Pass
2**	2366.900	40.71	-4.34	54.0	13.29	AV	69.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_19.06.23

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

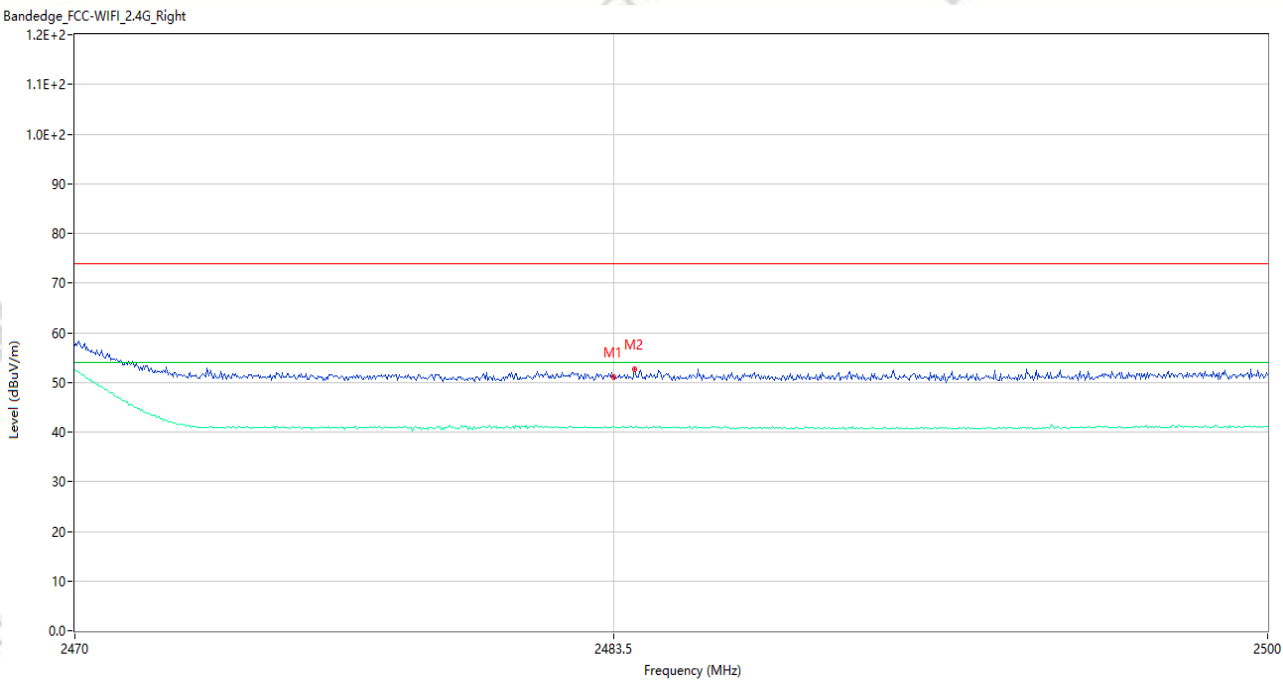


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.10	-3.78	74.0	22.90	Peak	52.00	150	Vertical	Pass
1**	2483.500	41.13	-3.78	54.0	12.87	AV	52.00	150	Vertical	Pass
2	2484.040	52.65	-3.78	74.0	21.35	Peak	228.00	150	Vertical	Pass
2**	2484.040	40.97	-3.78	54.0	13.03	AV	228.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_19.00.47

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

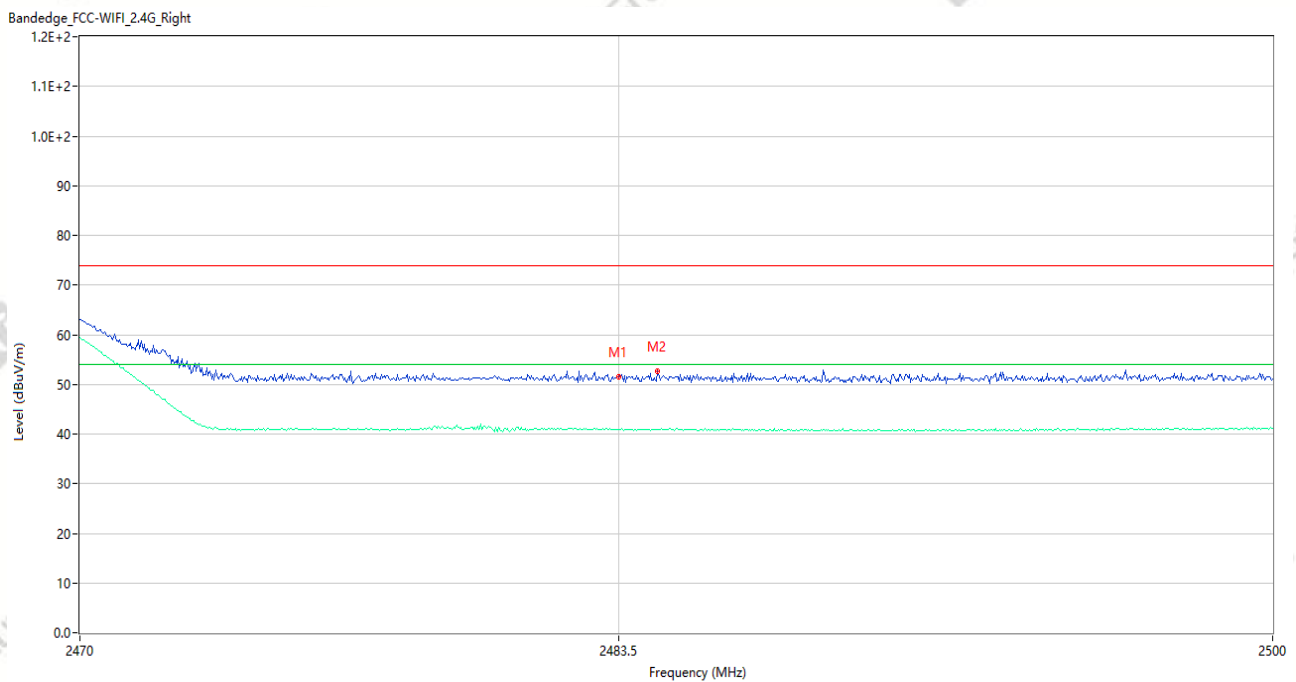

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.61	-3.78	74.0	22.39	Peak	22.00	150	Horizontal	Pass
1**	2483.500	41.01	-3.78	54.0	12.99	AV	22.00	150	Horizontal	Pass
2	2484.490	52.66	-3.78	74.0	21.34	Peak	352.00	150	Horizontal	Pass
2**	2484.490	40.93	-3.78	54.0	13.07	AV	352.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_19.50.07

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.74	-4.87	74.0	23.26	Peak	178.23	150	Vertical	Pass
1**	2390.000	40.18	-4.87	54.0	13.82	AV	178.23	150	Vertical	Pass
2	2366.800	52.20	-4.35	74.0	21.80	Peak	181.00	150	Vertical	Pass
2**	2366.800	40.47	-4.35	54.0	13.53	AV	181.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_19.34.52

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.11	-4.87	74.0	22.89	Peak	247.04	150	Horizontal	Pass
1**	2390.000	40.28	-4.87	54.0	13.72	AV	247.04	150	Horizontal	Pass
2	2369.100	51.52	-4.10	74.0	22.48	Peak	233.00	150	Horizontal	Pass
2**	2369.100	40.65	-4.10	54.0	13.35	AV	233.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_19.52.58

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

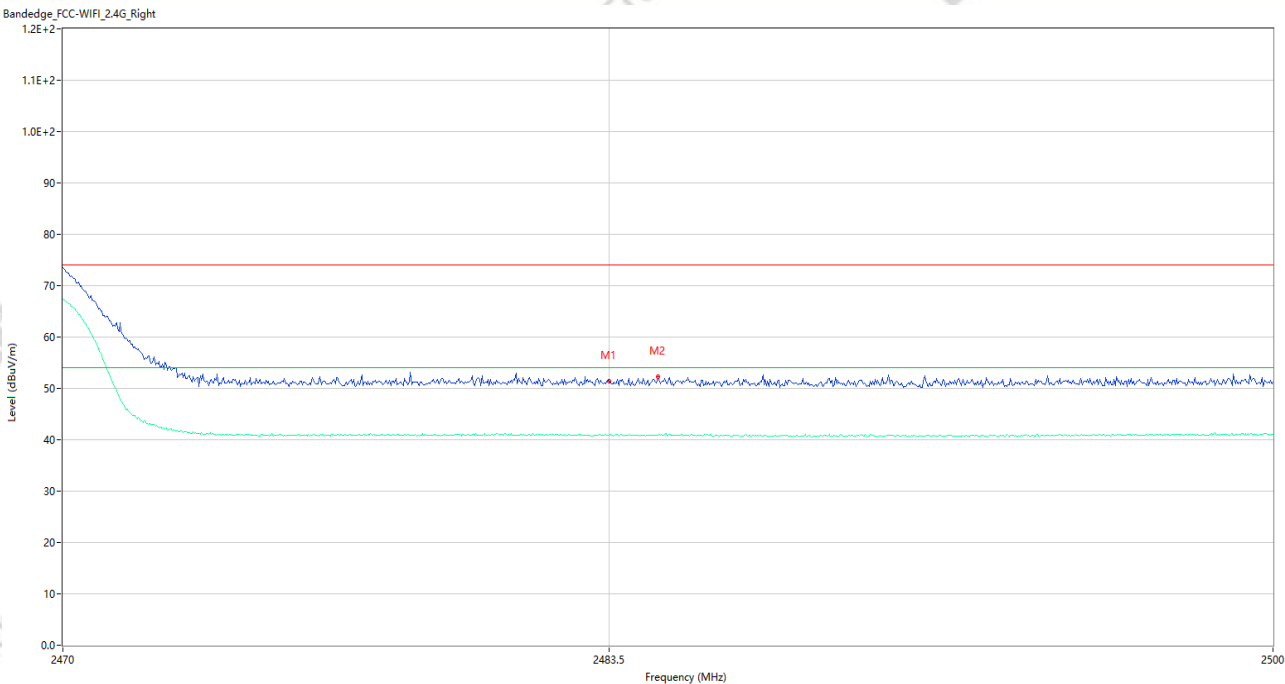


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.48	-3.78	74.0	22.52	Peak	316.00	150	Vertical	Pass
1**	2483.500	40.81	-3.78	54.0	13.19	AV	316.00	150	Vertical	Pass
2	2484.700	52.23	-3.78	74.0	21.77	Peak	121.00	150	Vertical	Pass
2**	2484.700	40.88	-3.78	54.0	13.12	AV	121.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331
Test Time: 2026-03-12_19.54.58

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

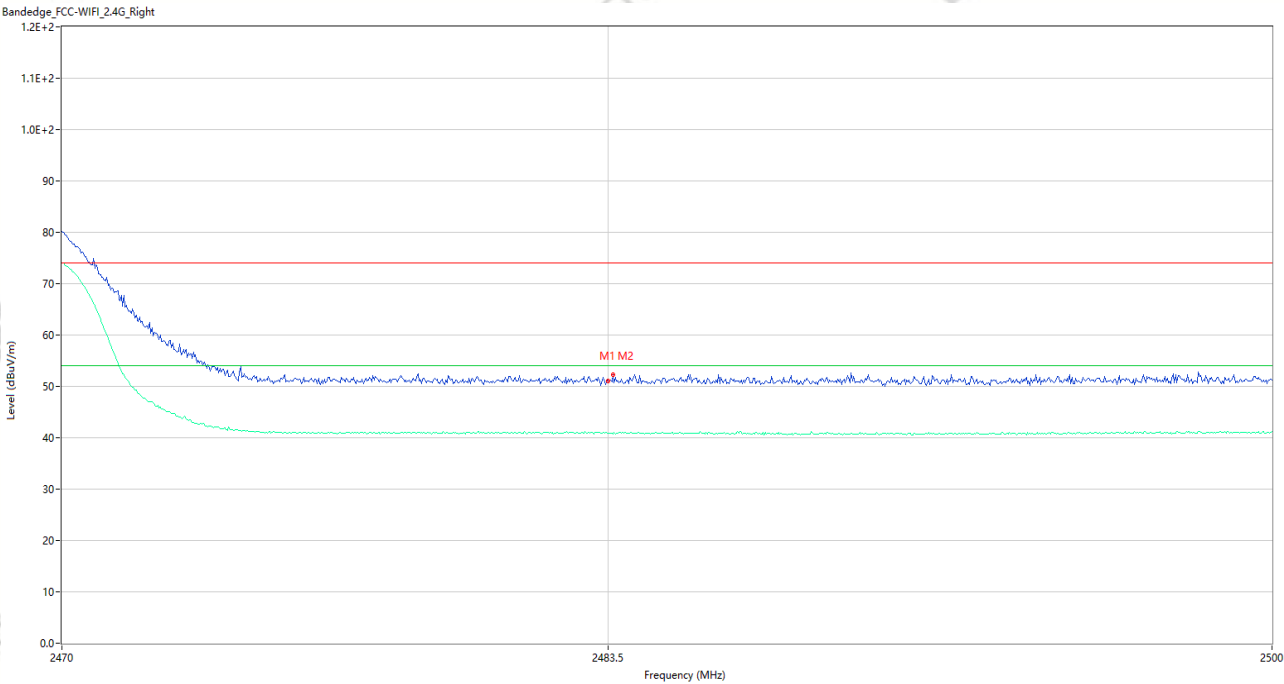

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.99	-3.78	74.0	23.01	Peak	332.00	150	Horizontal	Pass
1**	2483.500	40.88	-3.78	54.0	13.12	AV	332.00	150	Horizontal	Pass
2	2483.620	52.30	-3.78	74.0	21.70	Peak	162.00	150	Horizontal	Pass
2**	2483.620	40.77	-3.78	54.0	13.23	AV	162.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331
Test Time: 2026-03-12_20.04.53

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.58	-4.87	74.0	23.42	Peak	359.60	150	Vertical	Pass
1**	2390.000	40.27	-4.87	54.0	13.73	AV	359.60	150	Vertical	Pass
2	2371.000	52.62	-4.03	74.0	21.38	Peak	112.00	150	Vertical	Pass
2**	2371.000	40.87	-4.03	54.0	13.13	AV	112.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331
Test Time: 2026-03-12_20.00.09

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.47	-4.87	74.0	23.53	Peak	27.96	150	Horizontal	Pass
1**	2390.000	40.22	-4.87	54.0	13.78	AV	27.96	150	Horizontal	Pass
2	2369.200	51.84	-4.09	74.0	22.16	Peak	350.00	150	Horizontal	Pass
2**	2369.200	40.83	-4.09	54.0	13.17	AV	350.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331
Test Time: 2026-03-12_20.08.33

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

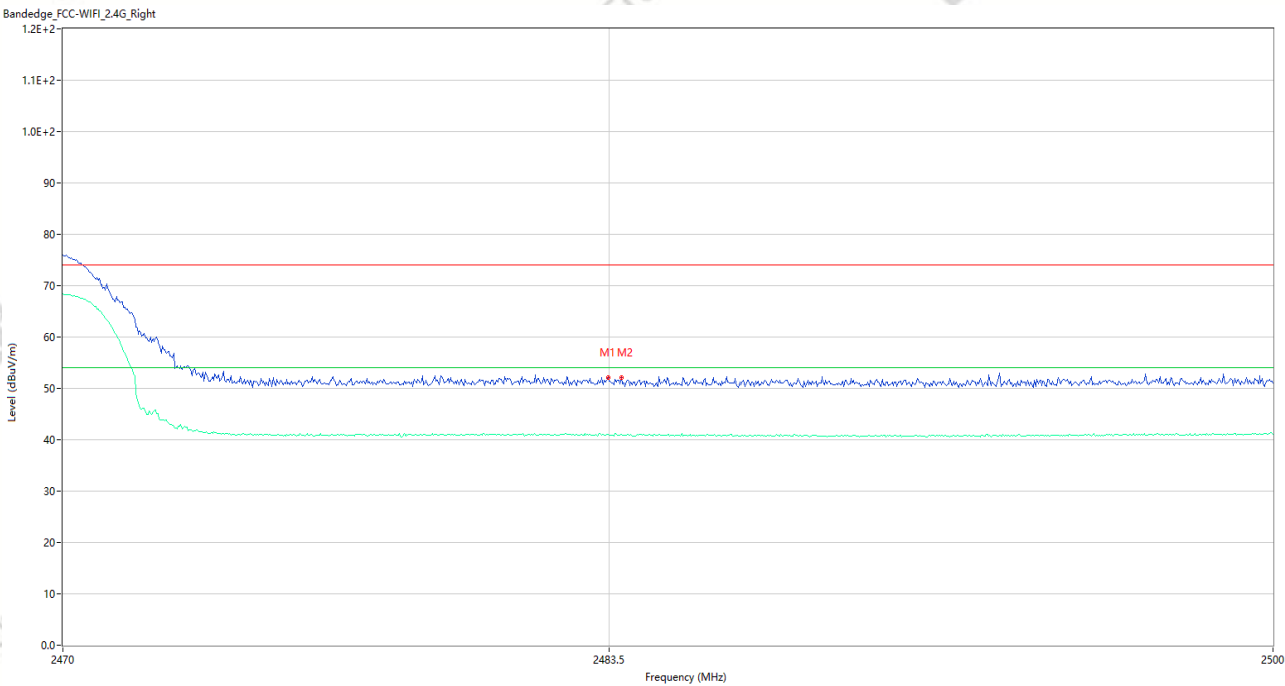


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.470	52.05	-3.78	74.0	21.95	Peak	201.00	150	Vertical	Pass
1**	2483.470	41.06	-3.78	54.0	12.94	AV	201.00	150	Vertical	Pass
2	2483.800	52.02	-3.78	74.0	21.98	Peak	339.00	150	Vertical	Pass
2**	2483.800	41.02	-3.78	54.0	12.98	AV	339.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_20.11.11

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

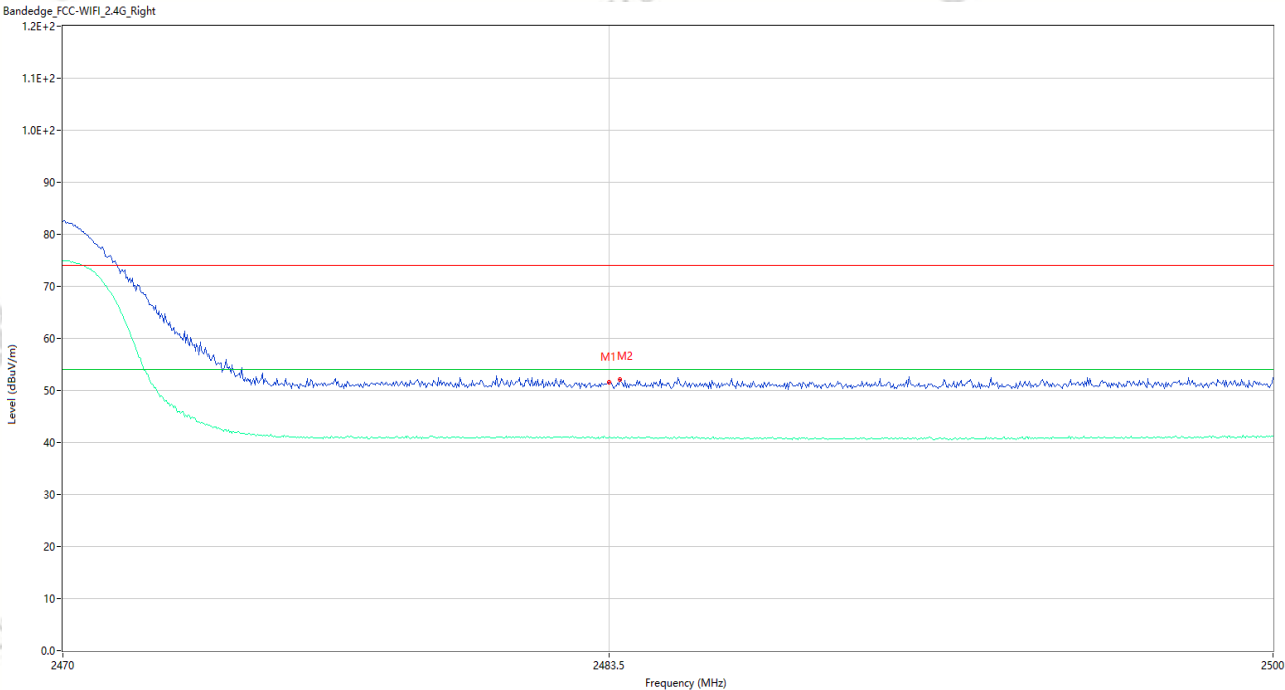

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.52	-3.78	74.0	22.48	Peak	239.00	150	Horizontal	Pass
1**	2483.500	41.06	-3.78	54.0	12.94	AV	239.00	150	Horizontal	Pass
2	2483.770	52.02	-3.78	74.0	21.98	Peak	268.00	150	Horizontal	Pass
2**	2483.770	40.90	-3.78	54.0	13.10	AV	268.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_20.43.28

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH3 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.47	-4.87	74.0	23.53	Peak	348.55	100	Vertical	Pass
1**	2390.000	40.25	-4.87	54.0	13.75	AV	348.55	100	Vertical	Pass
2	2367.300	51.51	-4.30	74.0	22.49	Peak	190.00	100	Vertical	Pass
2**	2367.300	40.63	-4.30	54.0	13.37	AV	190.00	100	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_20.38.04

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH3 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.38	-4.87	74.0	23.62	Peak	123.88	150	Horizontal	Pass
1**	2390.000	40.12	-4.87	54.0	13.88	AV	123.88	150	Horizontal	Pass
2	2367.400	52.24	-4.29	74.0	21.76	Peak	158.00	150	Horizontal	Pass
2**	2367.400	40.69	-4.29	54.0	13.31	AV	158.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331
Test Time: 2026-03-12_20.56.51

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH9 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

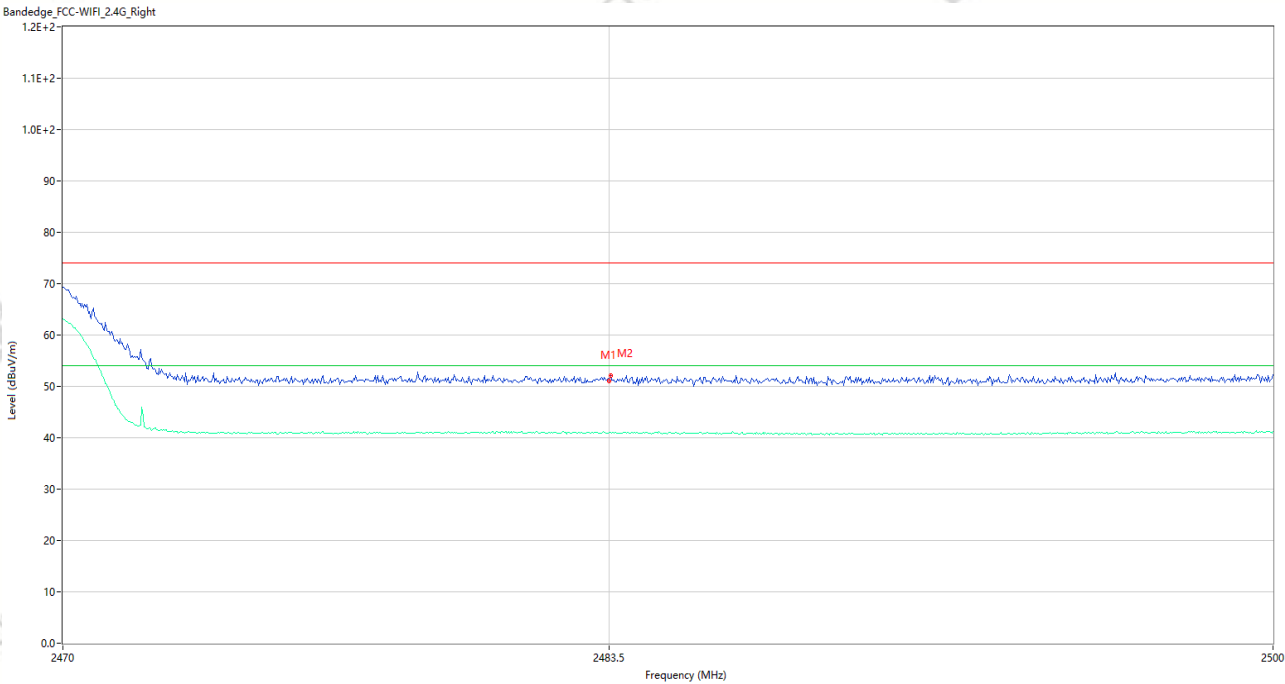


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.12	-3.78	74.0	22.88	Peak	88.00	150	Vertical	Pass
1**	2483.500	41.12	-3.78	54.0	12.88	AV	88.00	150	Vertical	Pass
2	2483.530	52.04	-3.78	74.0	21.96	Peak	181.00	150	Vertical	Pass
2**	2483.530	41.05	-3.78	54.0	12.95	AV	181.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331
Test Time: 2026-03-12_21.02.25

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH9 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01

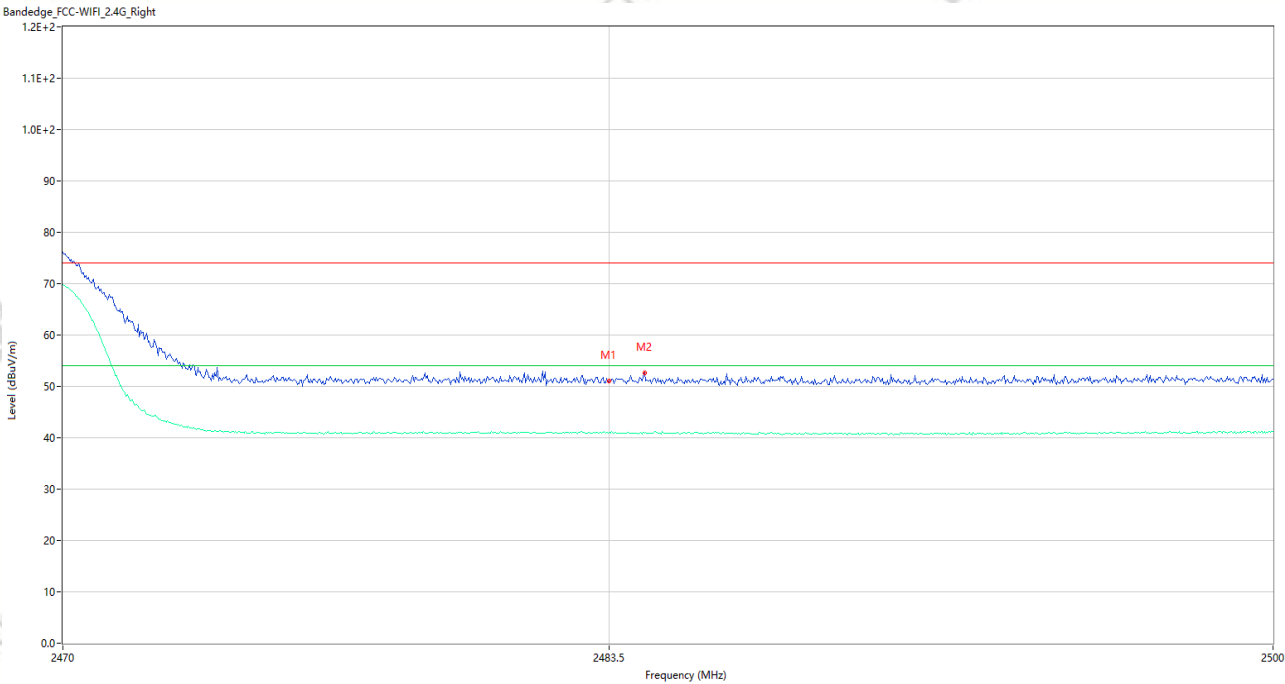

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.98	-3.78	74.0	23.02	Peak	104.00	150	Horizontal	Pass
1**	2483.500	41.09	-3.78	54.0	12.91	AV	104.00	150	Horizontal	Pass
2	2484.370	52.63	-3.78	74.0	21.37	Peak	333.00	150	Horizontal	Pass
2**	2484.370	40.82	-3.78	54.0	13.18	AV	333.00	150	Horizontal	Pass

Aux. Antenna Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.10.52

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.75	-4.87	74.0	23.25	Peak	0.30	150	Vertical	Pass
1**	2390.000	40.35	-4.87	54.0	13.65	AV	0.30	150	Vertical	Pass
2	2368.200	52.06	-4.20	74.0	21.94	Peak	114.00	150	Vertical	Pass
2**	2368.200	40.68	-4.20	54.0	13.32	AV	114.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.09.22

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.14	-4.87	74.0	23.86	Peak	359.83	150	Horizontal	Pass
1**	2390.000	40.33	-4.87	54.0	13.67	AV	359.83	150	Horizontal	Pass
2	2369.200	52.04	-4.09	74.0	21.96	Peak	360.00	150	Horizontal	Pass
2**	2369.200	40.58	-4.09	54.0	13.42	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.15.30

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

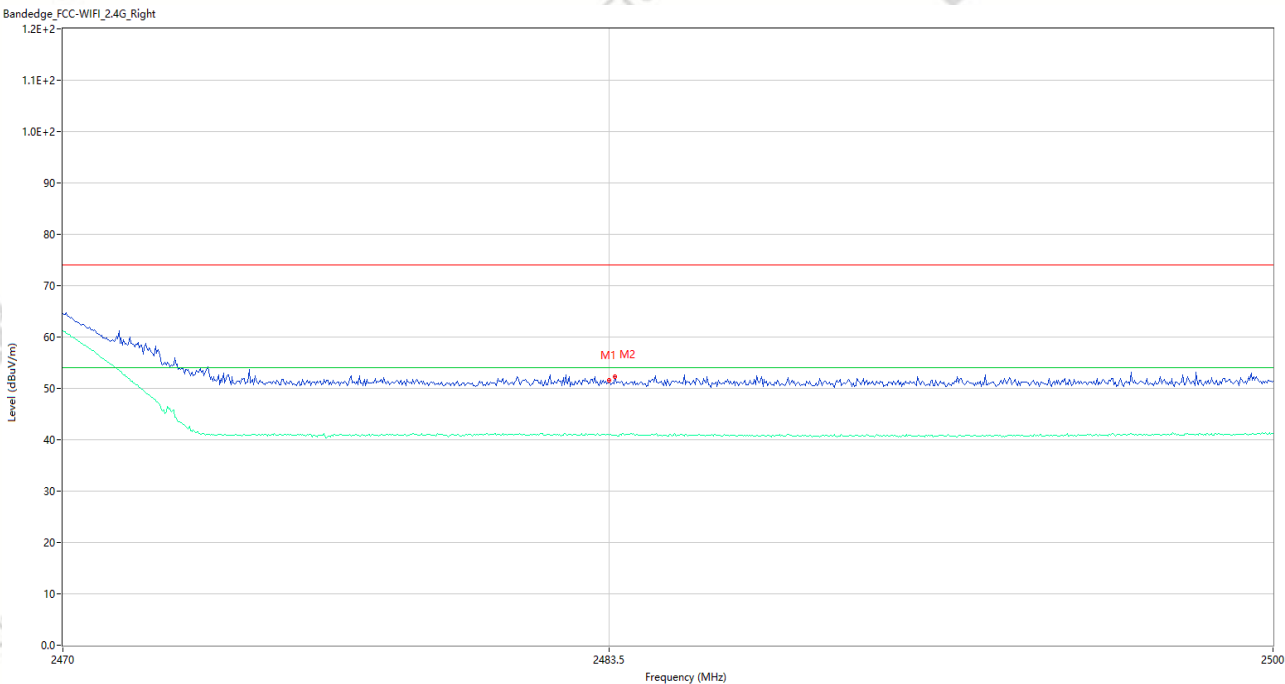


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.55	-3.78	74.0	22.45	Peak	0.00	150	Vertical	Pass
1**	2483.500	40.84	-3.78	54.0	13.16	AV	0.00	150	Vertical	Pass
2	2483.650	52.21	-3.78	74.0	21.79	Peak	32.00	150	Vertical	Pass
2**	2483.650	40.92	-3.78	54.0	13.08	AV	32.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.19.20

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

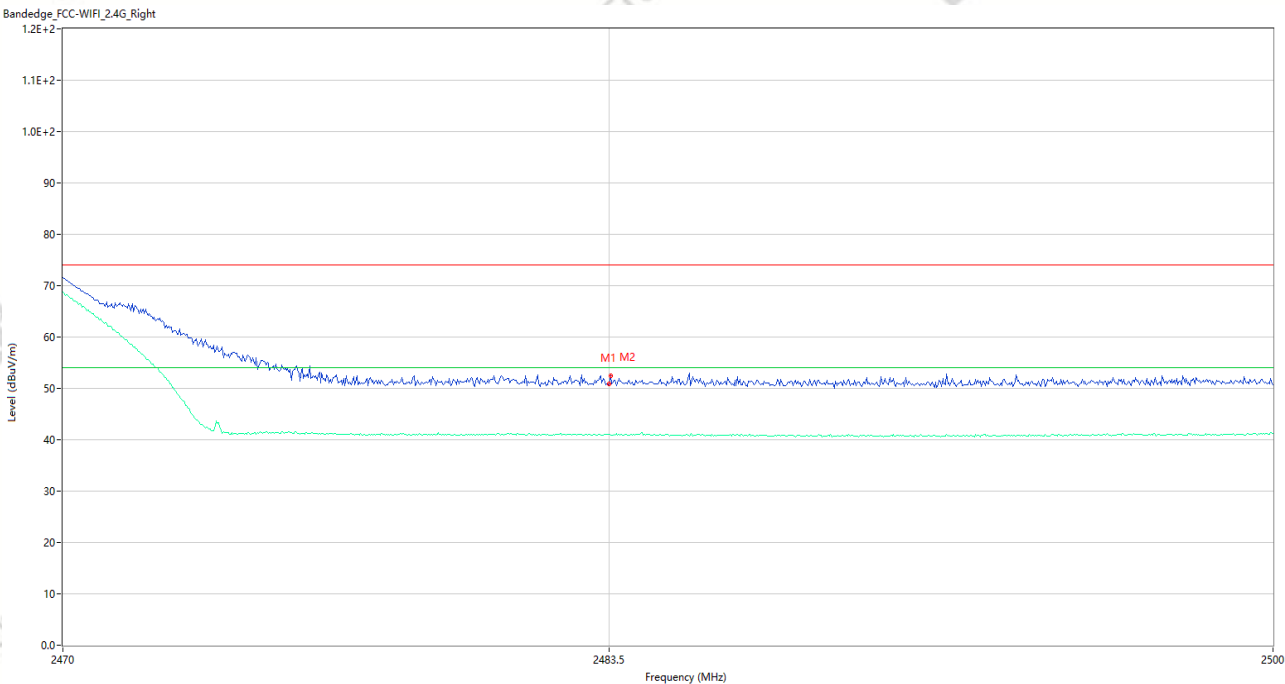

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.91	-3.78	74.0	23.09	Peak	137.00	150	Horizontal	Pass
1**	2483.500	40.99	-3.78	54.0	13.01	AV	137.00	150	Horizontal	Pass
2	2483.530	52.45	-3.78	74.0	21.55	Peak	104.00	150	Horizontal	Pass
2**	2483.530	40.95	-3.78	54.0	13.05	AV	104.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.47.41

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.44	-4.87	74.0	23.56	Peak	357.54	150	Vertical	Pass
1**	2390.000	40.25	-4.87	54.0	13.75	AV	357.54	150	Vertical	Pass
2	2368.900	52.07	-4.12	74.0	21.93	Peak	347.00	150	Vertical	Pass
2**	2368.900	40.67	-4.12	54.0	13.33	AV	347.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.49.16

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

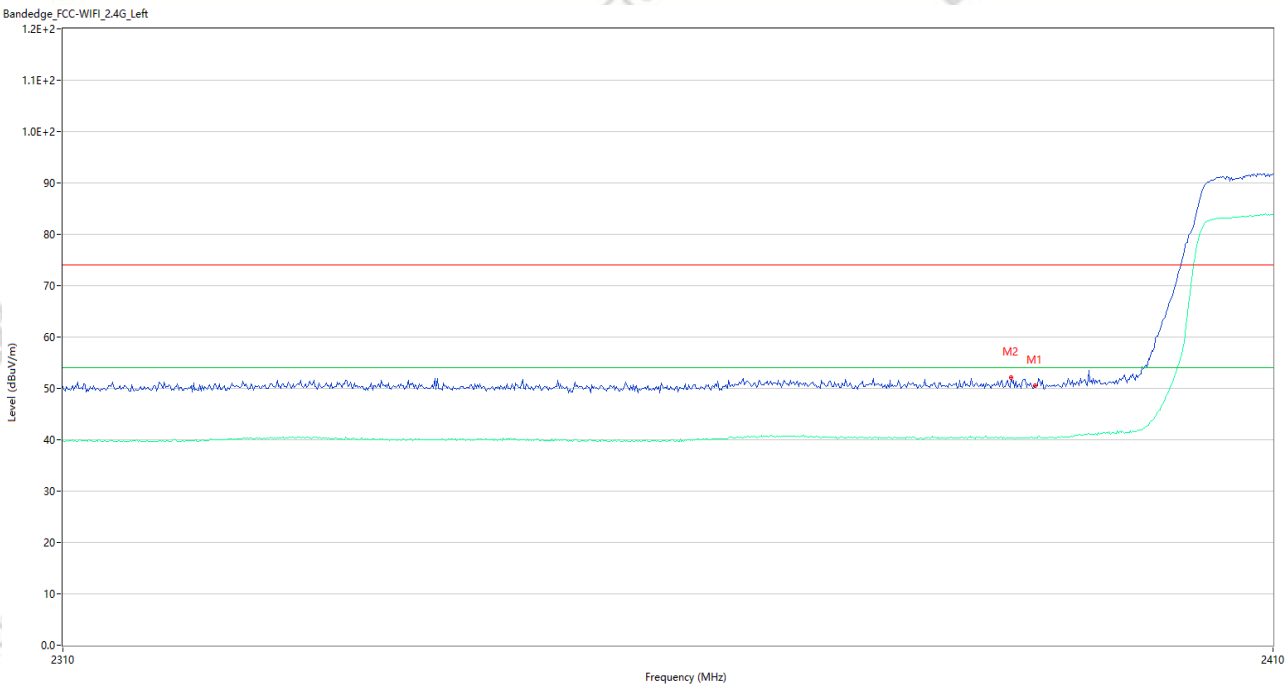


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.55	-4.87	74.0	23.45	Peak	116.91	150	Horizontal	Pass
1**	2390.000	40.43	-4.87	54.0	13.57	AV	116.91	150	Horizontal	Pass
2	2388.000	52.08	-4.76	74.0	21.92	Peak	83.00	150	Horizontal	Pass
2**	2388.000	40.33	-4.76	54.0	13.67	AV	83.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.55.28

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

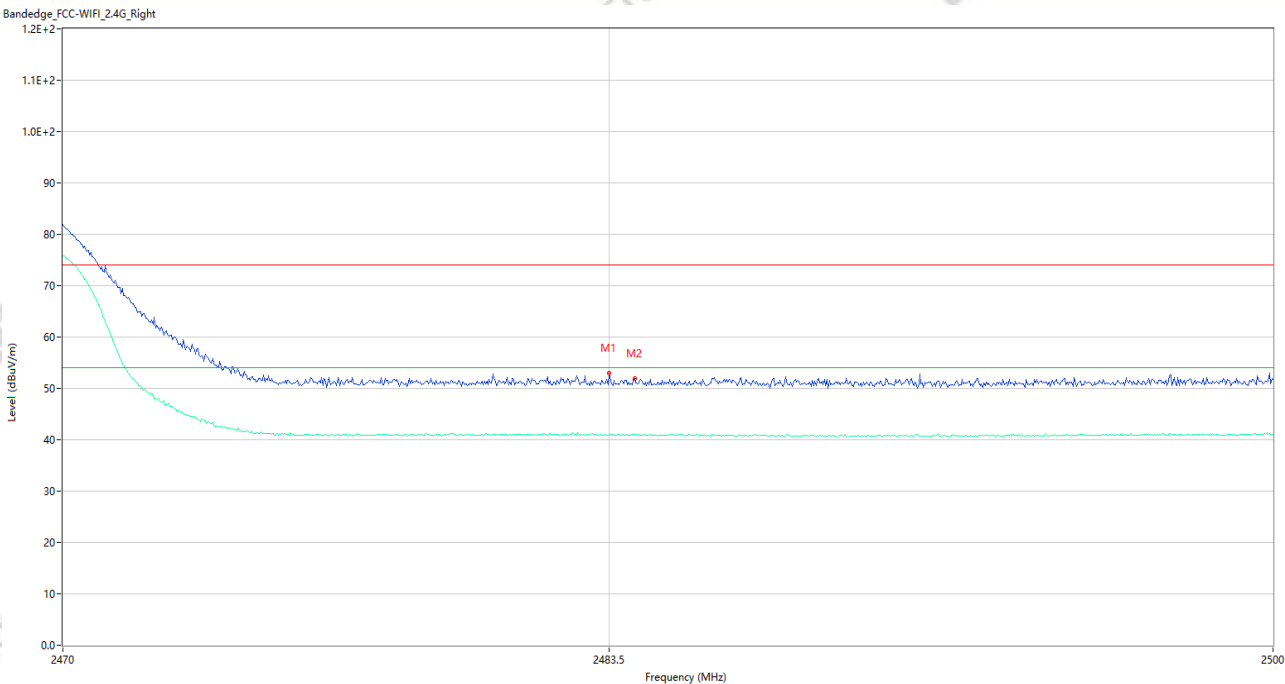


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.05	-3.78	74.0	20.95	Peak	4.00	150	Vertical	Pass
1**	2483.500	40.91	-3.78	54.0	13.09	AV	4.00	150	Vertical	Pass
2	2484.130	51.98	-3.78	74.0	22.02	Peak	256.00	150	Vertical	Pass
2**	2484.130	41.02	-3.78	54.0	12.98	AV	256.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331
Test Time: 2026-03-12_21.53.35

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

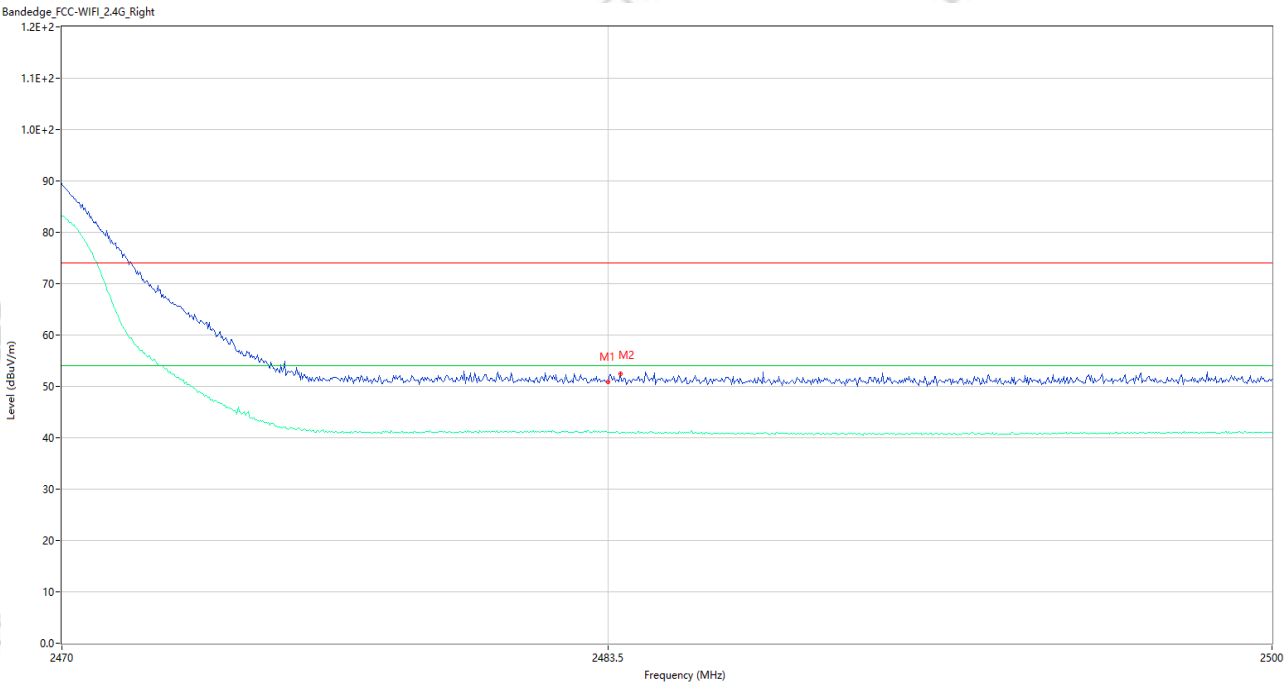

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.85	-3.78	74.0	23.15	Peak	0.00	150	Horizontal	Pass
1**	2483.500	41.03	-3.78	54.0	12.97	AV	0.00	150	Horizontal	Pass
2	2483.800	52.42	-3.78	74.0	21.58	Peak	56.00	150	Horizontal	Pass
2**	2483.800	40.93	-3.78	54.0	13.07	AV	56.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_21.59.11

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.77	-4.87	74.0	23.23	Peak	77.90	150	Vertical	Pass
1**	2390.000	40.49	-4.87	54.0	13.51	AV	77.90	150	Vertical	Pass
2	2368.600	51.83	-4.16	74.0	22.17	Peak	332.00	150	Vertical	Pass
2**	2368.600	40.73	-4.16	54.0	13.27	AV	332.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_22.01.07

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH1 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.89	-4.87	74.0	24.11	Peak	100.00	150	Horizontal	Pass
1**	2390.000	40.49	-4.87	54.0	13.51	AV	100.00	150	Horizontal	Pass
2	2369.100	51.66	-4.10	74.0	22.34	Peak	236.00	150	Horizontal	Pass
2**	2369.100	40.73	-4.10	54.0	13.27	AV	236.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_22.16.06

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

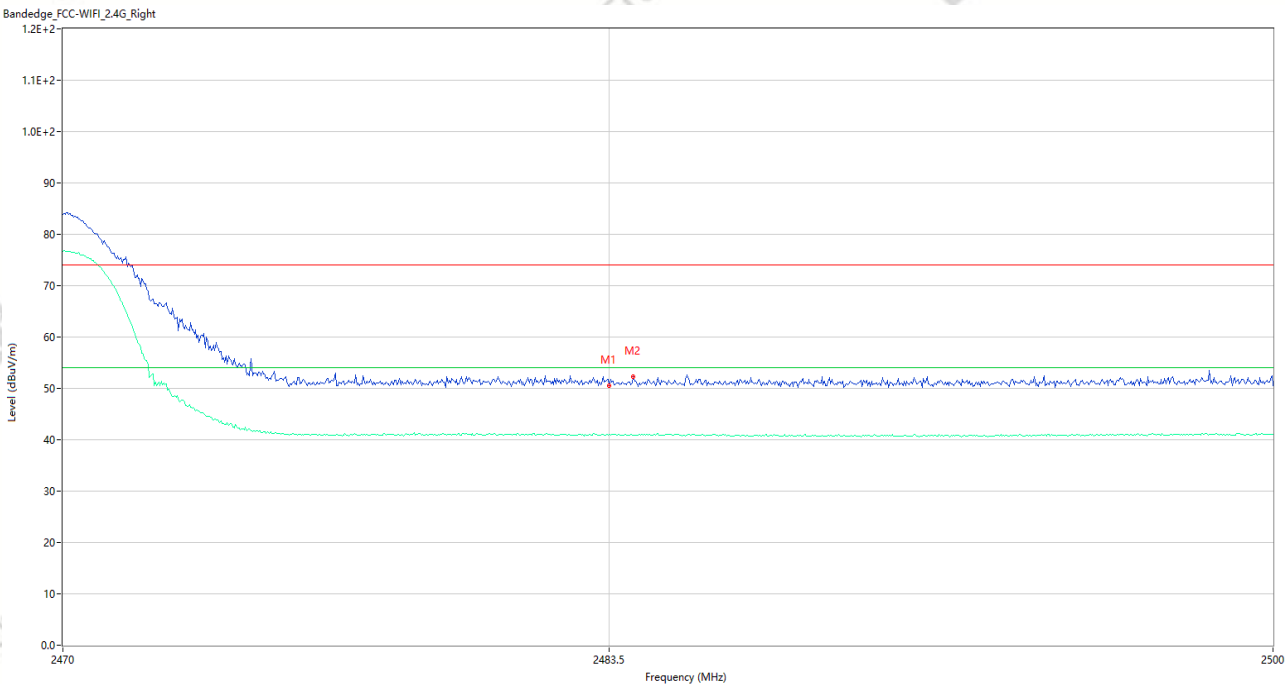


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.50	-3.78	74.0	23.50	Peak	133.00	150	Vertical	Pass
1**	2483.500	41.04	-3.78	54.0	12.96	AV	133.00	150	Vertical	Pass
2	2484.100	52.28	-3.78	74.0	21.72	Peak	360.00	150	Vertical	Pass
2**	2484.100	40.89	-3.78	54.0	13.11	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_22.04.34

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH11 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

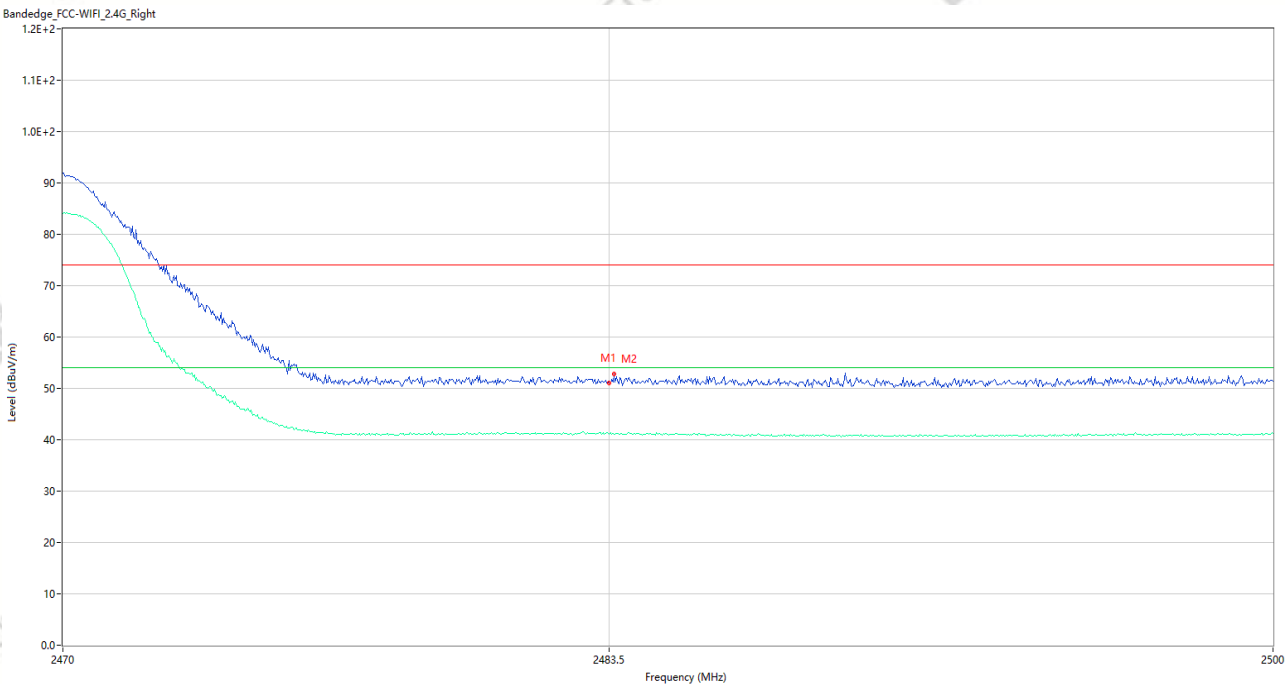

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.10	-3.78	74.0	22.90	Peak	358.00	150	Horizontal	Pass
1**	2483.500	41.00	-3.78	54.0	13.00	AV	358.00	150	Horizontal	Pass
2	2483.620	52.77	-3.78	74.0	21.23	Peak	0.00	150	Horizontal	Pass
2**	2483.620	41.05	-3.78	54.0	12.95	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331
Test Time: 2026-03-12_22.32.02

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH3 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.46	-4.87	74.0	22.54	Peak	22.43	150	Vertical	Pass
1**	2390.000	40.32	-4.87	54.0	13.68	AV	22.43	150	Vertical	Pass
2	2369.500	52.37	-4.06	74.0	21.63	Peak	184.00	150	Vertical	Pass
2**	2369.500	40.75	-4.06	54.0	13.25	AV	184.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_22.29.37

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH3 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

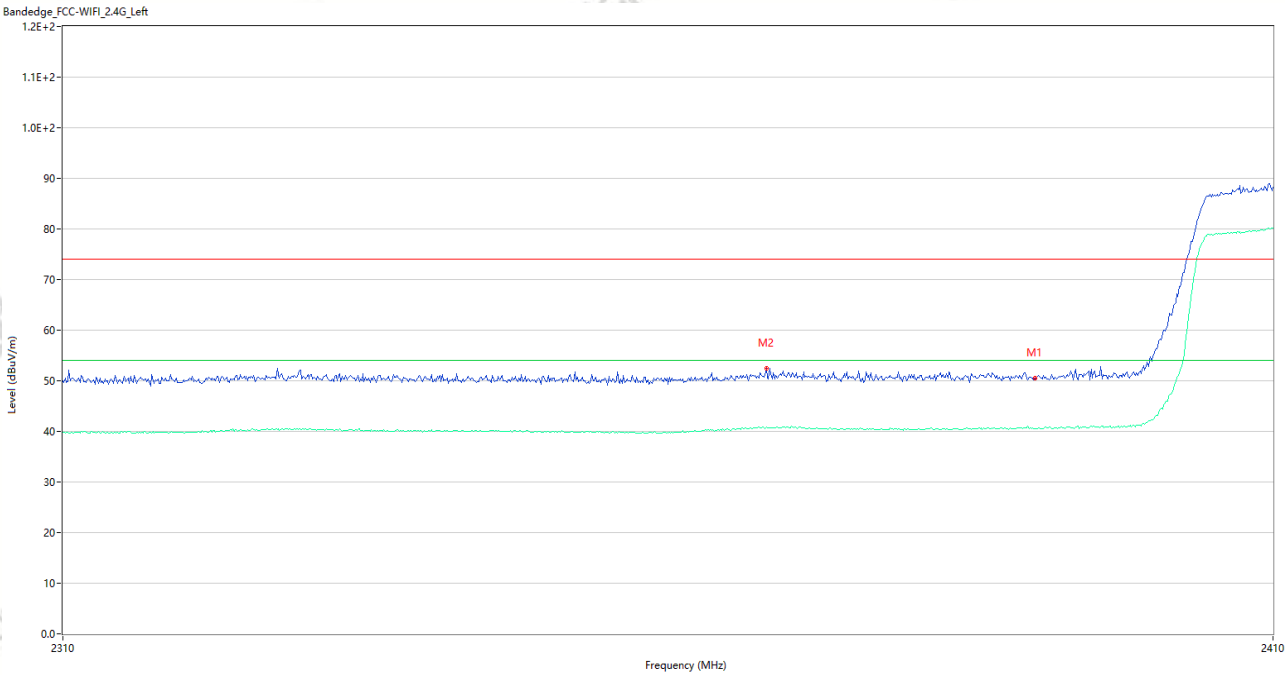


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.56	-4.87	74.0	23.44	Peak	180.99	150	Horizontal	Pass
1**	2390.000	40.54	-4.87	54.0	13.46	AV	180.99	150	Horizontal	Pass
2	2367.600	52.46	-4.27	74.0	21.54	Peak	251.00	150	Horizontal	Pass
2**	2367.600	40.87	-4.27	54.0	13.13	AV	251.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010331

Test Time: 2026-03-12_22.36.12

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH9 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

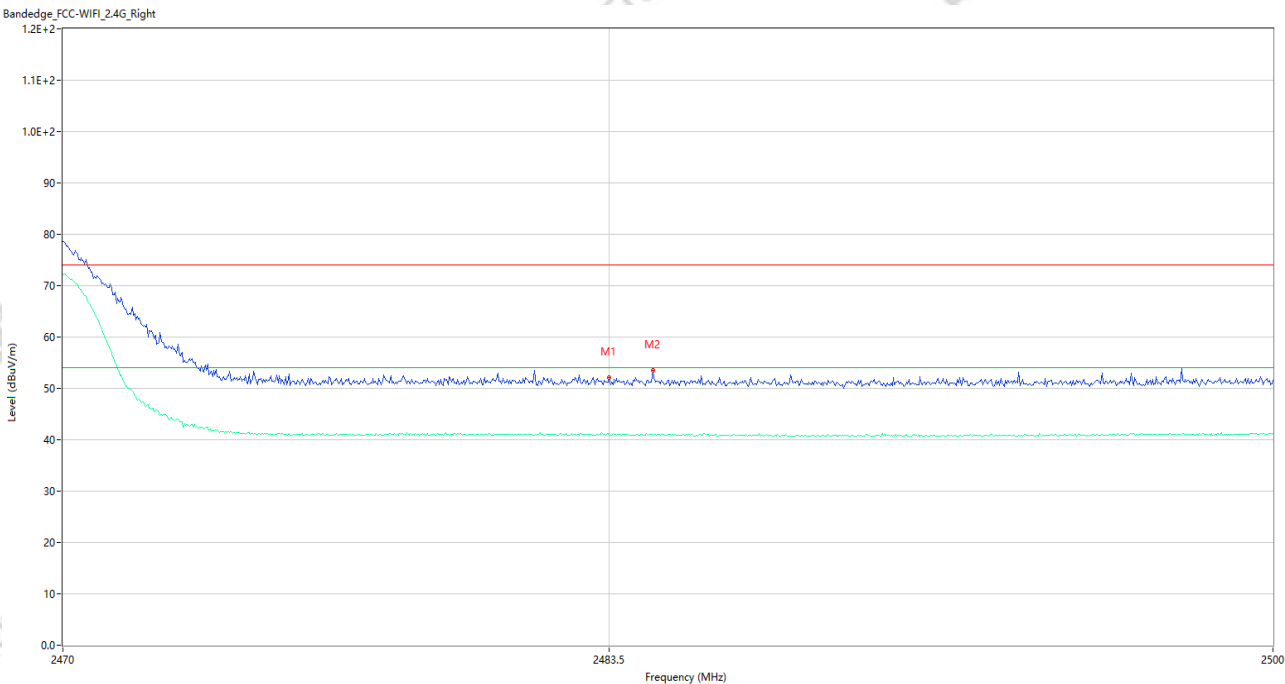


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.36	-3.78	74.0	23.64	Peak	0.00	150	Vertical	Pass
1**	2483.500	40.94	-3.78	54.0	13.06	AV	0.00	150	Vertical	Pass
2	2484.580	53.51	-3.78	74.0	20.49	Peak	42.00	150	Vertical	Pass
2**	2484.580	41.02	-3.78	54.0	12.98	AV	42.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010331
Test Time: 2026-03-12_22.38.44

EUT Name:	Rugged Tablet PC	Temp.(°C):	21.1
Model Number:	M101Q9	Humidity (%RH):	42
Sample Number:	CC2511399-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n40 CH9 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器+数据线: A01 ANT1

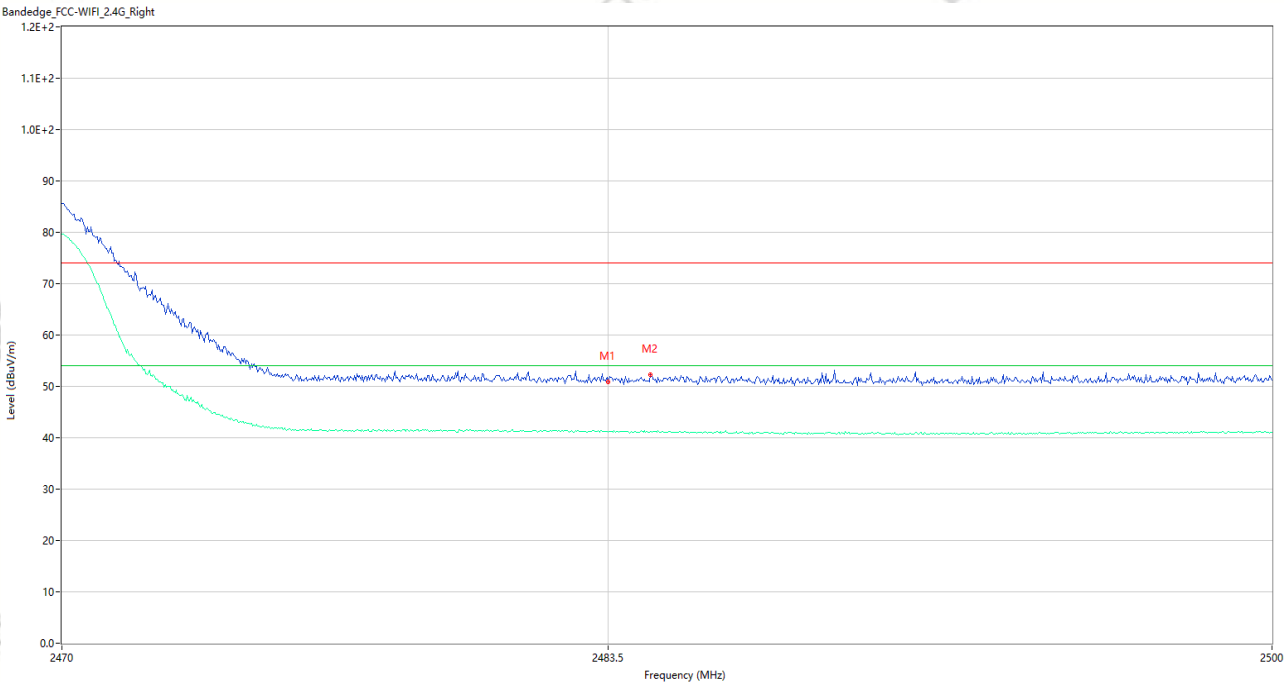

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.89	-3.78	74.0	23.11	Peak	360.00	150	Horizontal	Pass
1**	2483.500	41.10	-3.78	54.0	12.90	AV	360.00	150	Horizontal	Pass
2	2484.550	52.34	-3.78	74.0	21.66	Peak	49.00	150	Horizontal	Pass
2**	2484.550	41.24	-3.78	54.0	12.76	AV	49.00	150	Horizontal	Pass