

Test Result

Main Antenna

Project Number: P-CC26060546

Test Time: 2026-07-19_09.59.54

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

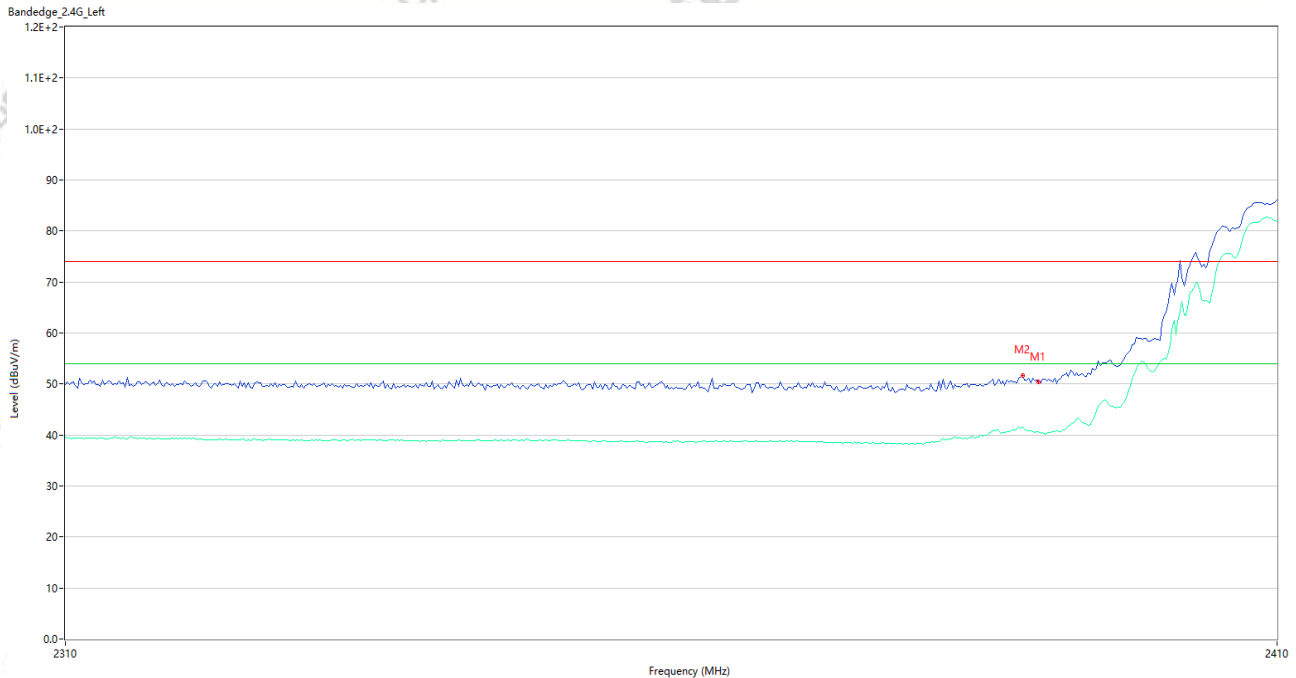
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11b CH1 P=20

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.58	-3.58	74.0	23.55	Peak	260.88	150	Vertical	Pass
1**	2390.000	40.69	-3.58	54.0	13.31	AV	260.88	150	Vertical	Pass
2	2388.667	51.66	-3.62	74.0	22.34	Peak	316.00	150	Vertical	Pass
2**	2388.667	41.49	-3.62	54.0	12.51	AV	316.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_09.53.48

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

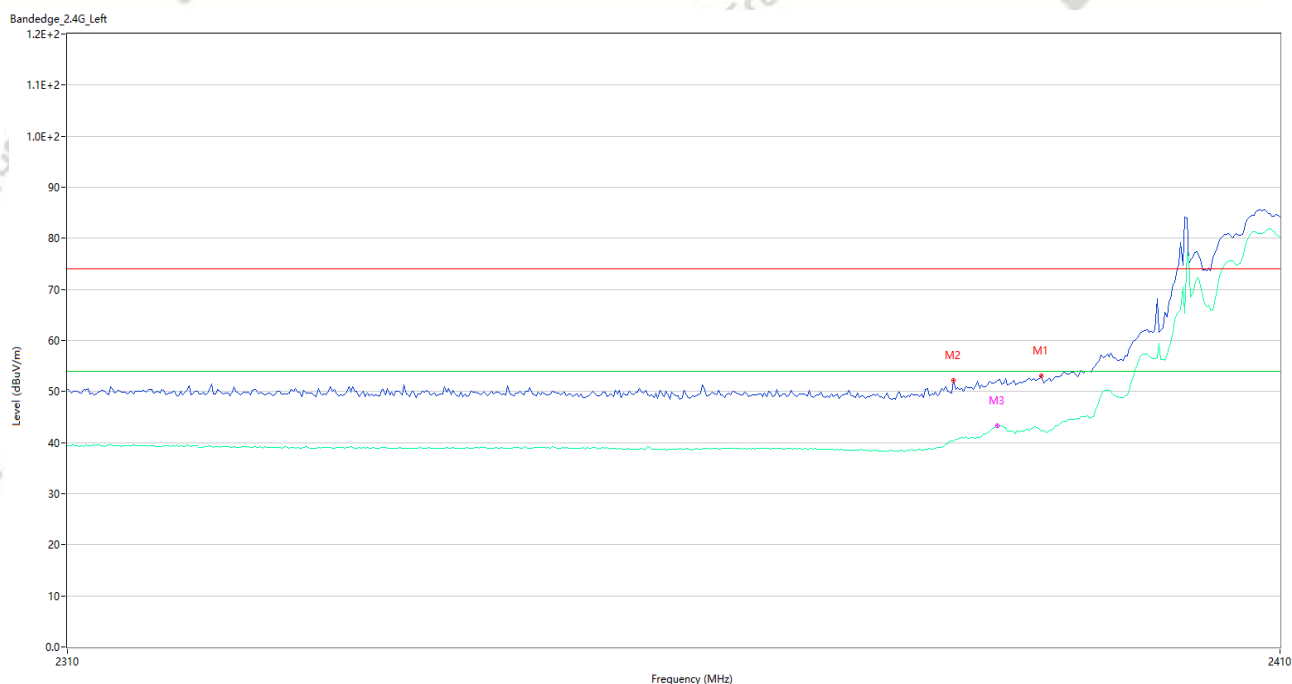
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11b CH1 P=20

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	53.02	-3.58	74.0	20.98	Peak	322.83	150	Horizontal	Pass
1**	2390.000	42.33	-3.58	54.0	11.67	AV	322.83	150	Horizontal	Pass
2	2382.667	52.17	-3.83	74.0	21.83	Peak	359.00	150	Horizontal	Pass
2**	2382.667	40.35	-3.83	54.0	13.65	AV	359.00	150	Horizontal	Pass
3	2386.333	52.26	-3.70	74.0	21.74	Peak	2.00	150	Horizontal	Pass
3**	2386.333	43.29	-3.70	54.0	10.71	AV	2.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.18.05

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

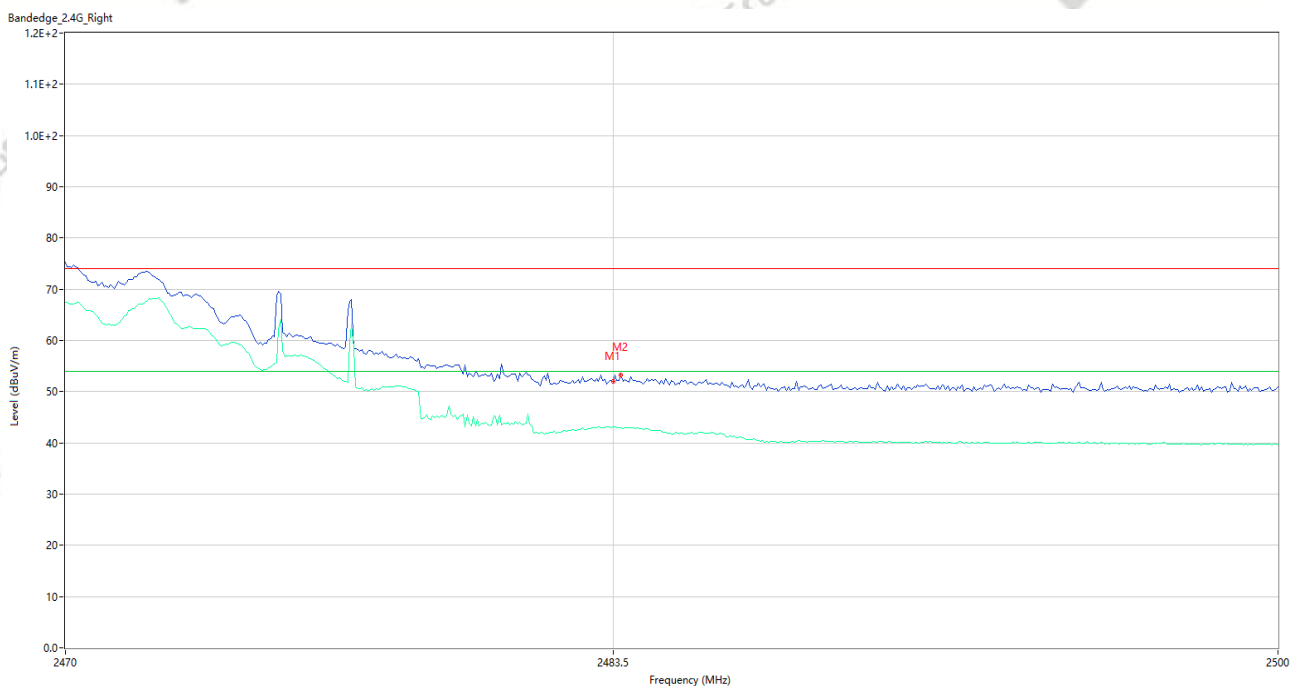
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11b CH11 P=20

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.04	-2.55	74.0	21.96	Peak	342.00	150	Vertical	Pass
1**	2483.500	43.20	-2.55	54.0	10.80	AV	342.00	150	Vertical	Pass
2	2483.700	53.30	-2.55	74.0	20.70	Peak	360.00	150	Vertical	Pass
2**	2483.700	43.02	-2.55	54.0	10.98	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.20.35

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

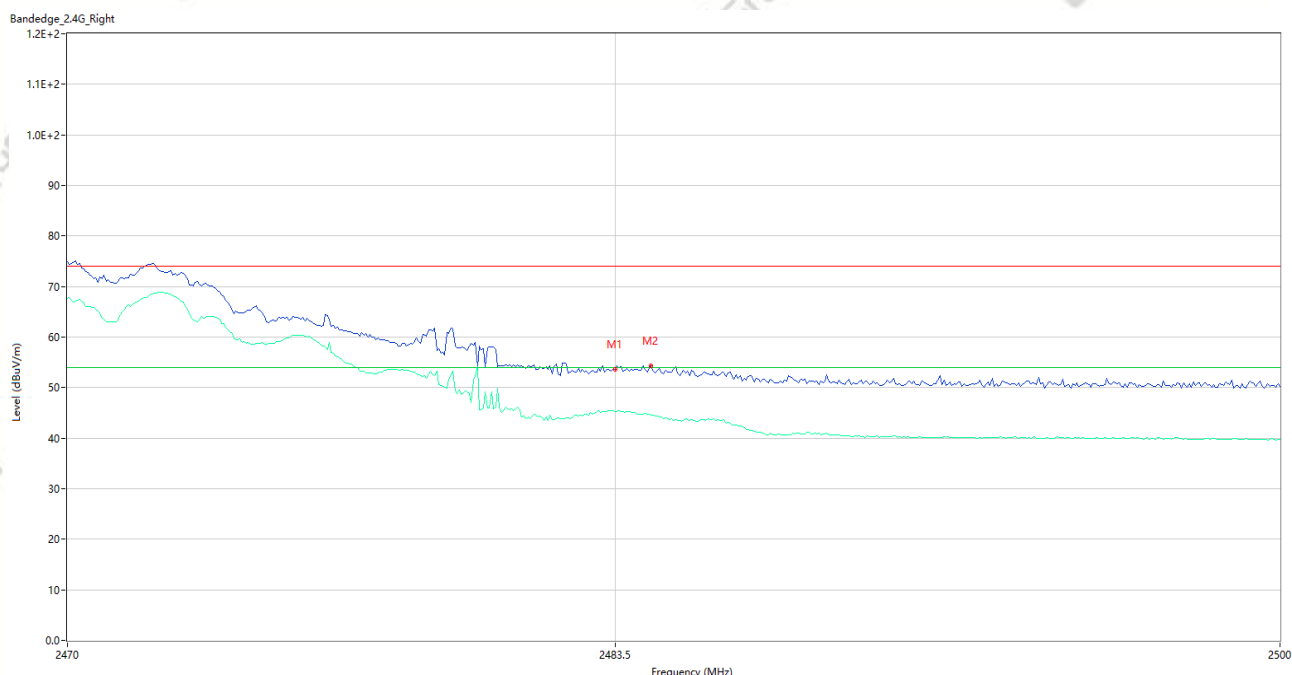
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11b CH11 P=20

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.65	-2.55	74.0	20.35	Peak	11.00	150	Horizontal	Pass
1**	2483.500	58.35	-2.55	54.0	8.65	AV	11.00	150	Horizontal	Pass
2	2484.400	54.23	-2.54	74.0	19.77	Peak	8.00	150	Horizontal	Pass
2**	2484.400	44.53	-2.54	54.0	9.47	AV	8.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.58.25

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

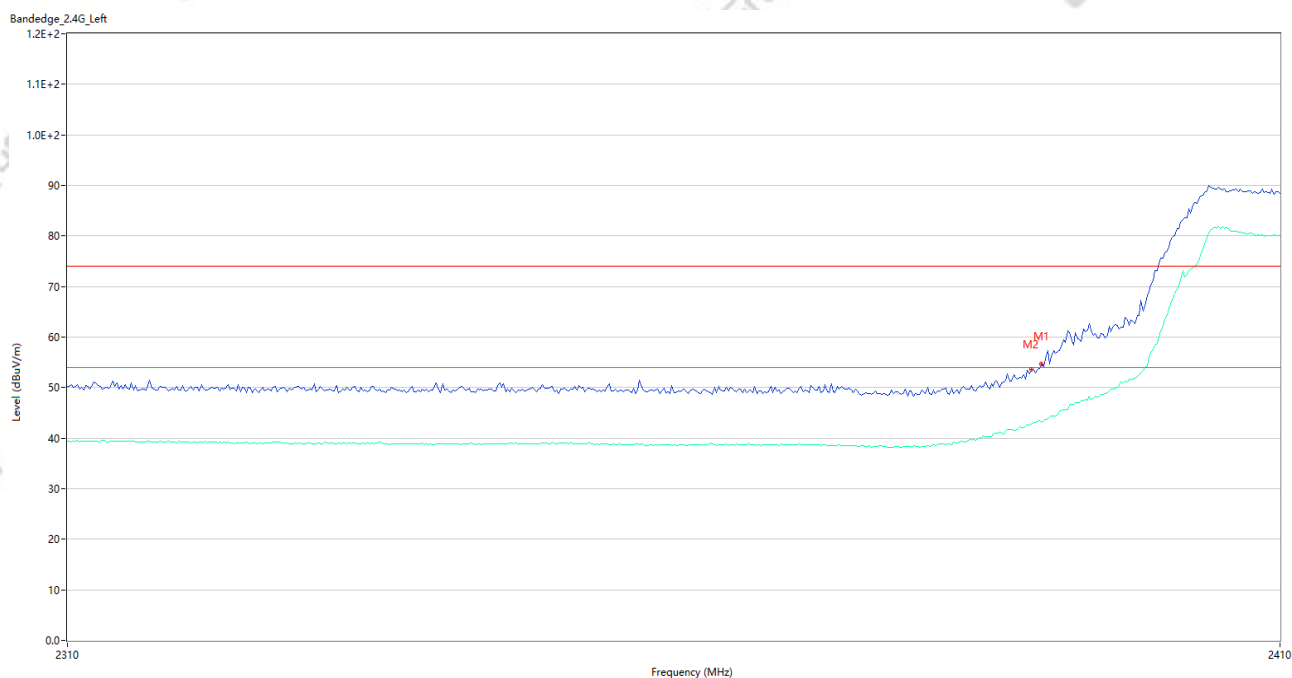
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11g CH1 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

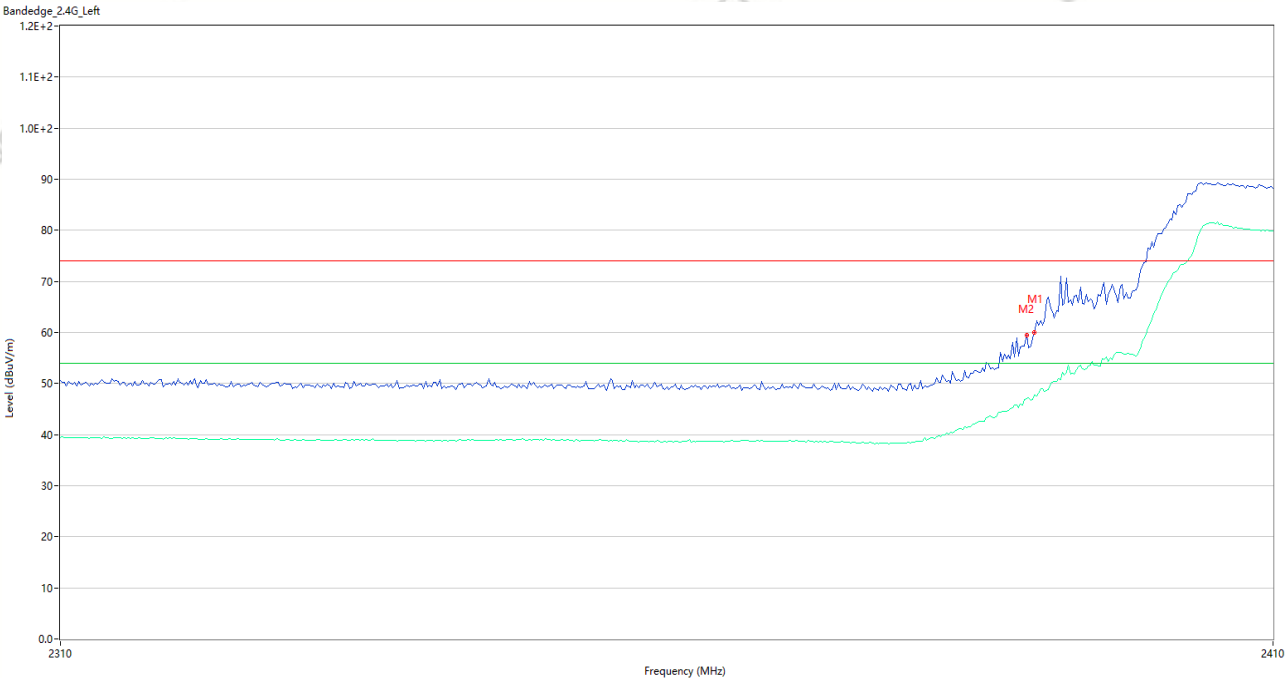
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.61	-3.58	74.0	19.39	Peak	266.05	150	Vertical	Pass
1**	2390.000	43.13	-3.58	54.0	10.87	AV	266.05	150	Vertical	Pass
2	2389.167	53.59	-3.61	74.0	20.41	Peak	281.00	150	Vertical	Pass
2**	2389.167	42.81	-3.61	54.0	11.19	AV	281.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.46.44

EUT Name:	Mobile Computer	Temp.(°C):	23
Model Number:	RS20	Humidity (%RH):	58
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Test Voltage:	AC 120V/60Hz
Test Site:	966#1	Test Mode:	2.4G WIFI 11g CH1 P=17.5
Test Engineer:	Zhang Siyuan	Remark:	适配器: A11+数据线: A58 ANT1



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	59.96	-3.58	74.0	14.04	Peak	323.76	150	Horizontal	Pass
1**	2390.000	47.66	-3.58	54.0	6.34	AV	323.76	150	Horizontal	Pass
2	2389.333	59.47	-3.60	74.0	14.53	Peak	102.00	150	Horizontal	Pass
2**	2389.333	47.07	-3.60	54.0	6.93	AV	102.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.30.03

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

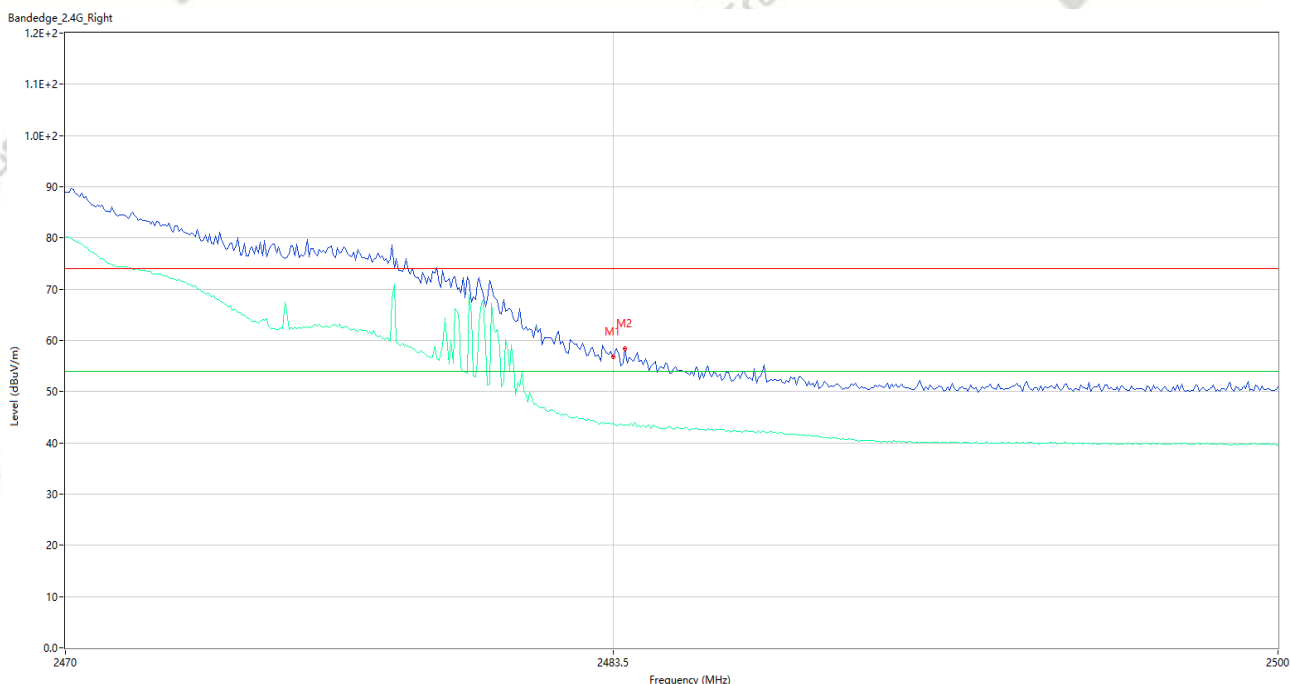
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11g CH11 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.75	-2.55	74.0	17.25	Peak	323.00	150	Vertical	Pass
1**	2483.500	43.89	-2.55	54.0	10.11	AV	323.00	150	Vertical	Pass
2	2483.800	58.38	-2.55	74.0	15.62	Peak	248.00	150	Vertical	Pass
2**	2483.800	43.54	-2.55	54.0	10.46	AV	248.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.24.51

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

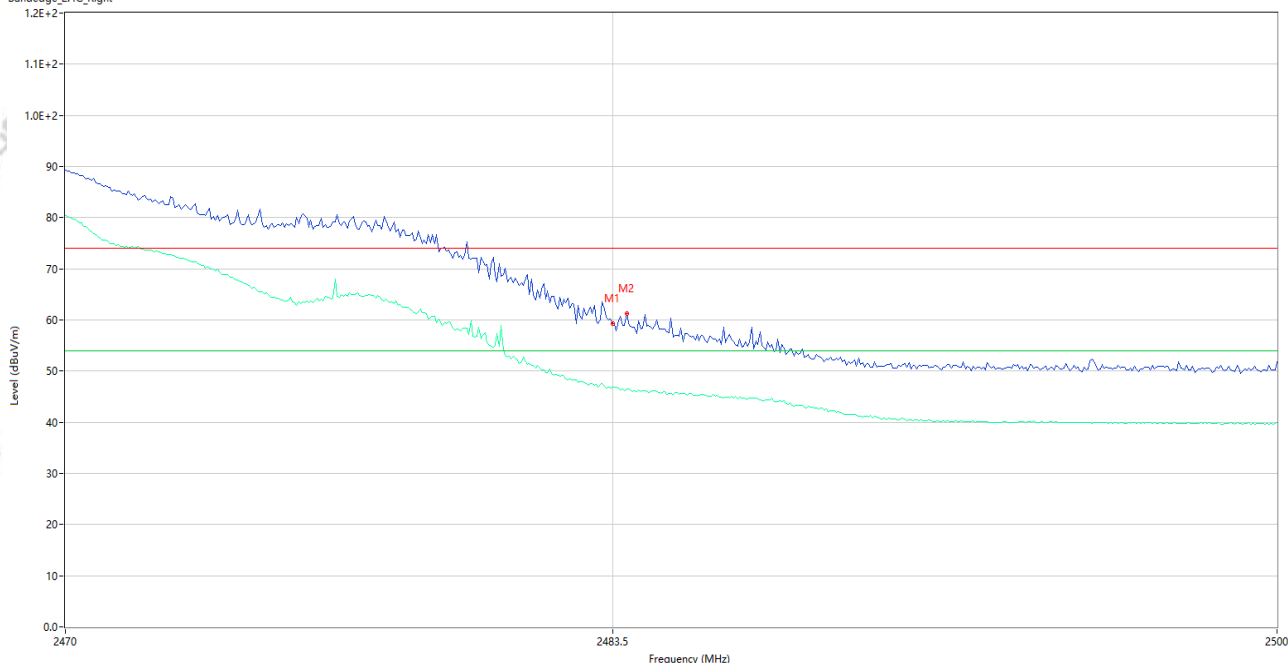
Test Site: 966#1

Test Mode: 2.4G WIFI 11g CH11 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

Bandedge_2.4G_Right



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	59.23	-2.55	74.0	14.77	Peak	343.00	150	Horizontal	Pass
1**	2483.500	46.91	-2.55	54.0	7.09	AV	343.00	150	Horizontal	Pass
2	2483.850	61.23	-2.55	74.0	12.77	Peak	286.00	150	Horizontal	Pass
2**	2483.850	46.53	-2.55	54.0	7.47	AV	286.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.57.07

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

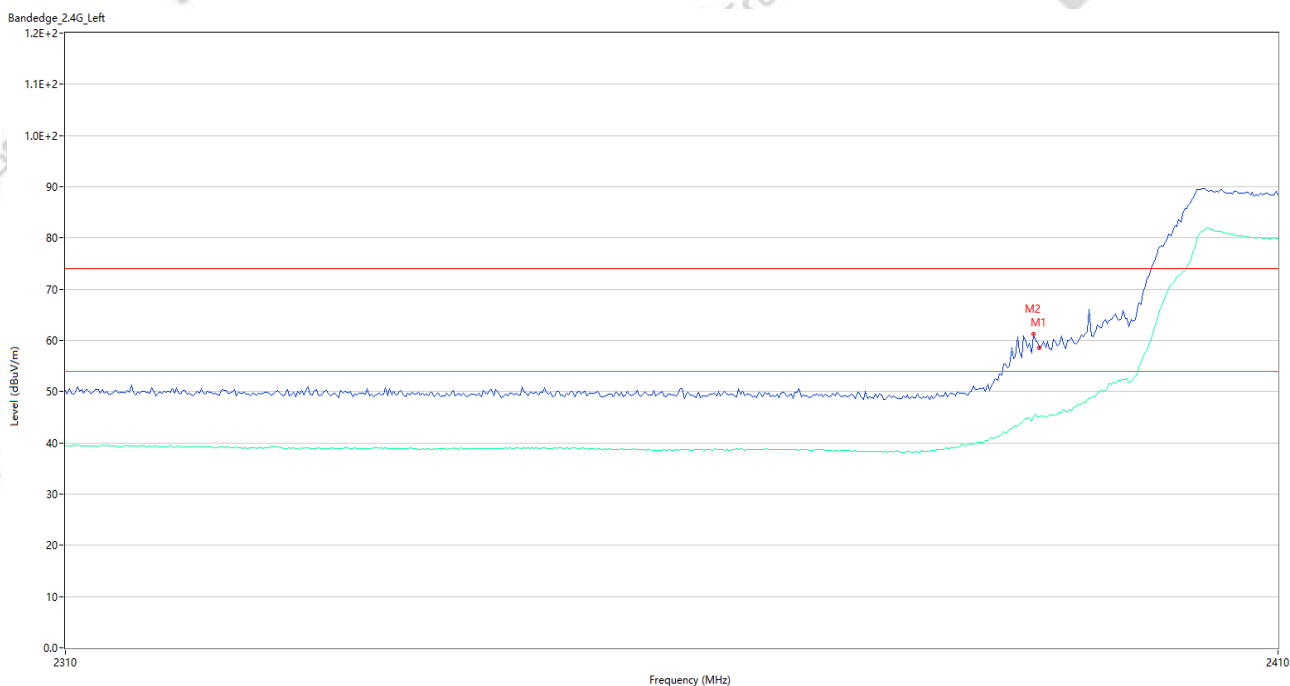
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n20 CH1 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	58.50	-3.58	74.0	15.50	Peak	259.00	150	Vertical	Pass
1**	2390.000	58.03	-3.58	54.0	8.97	AV	259.00	150	Vertical	Pass
2	2389.500	61.16	-3.60	74.0	12.84	Peak	322.00	150	Vertical	Pass
2**	2389.500	58.05	-3.60	54.0	8.95	AV	322.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.53.17

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

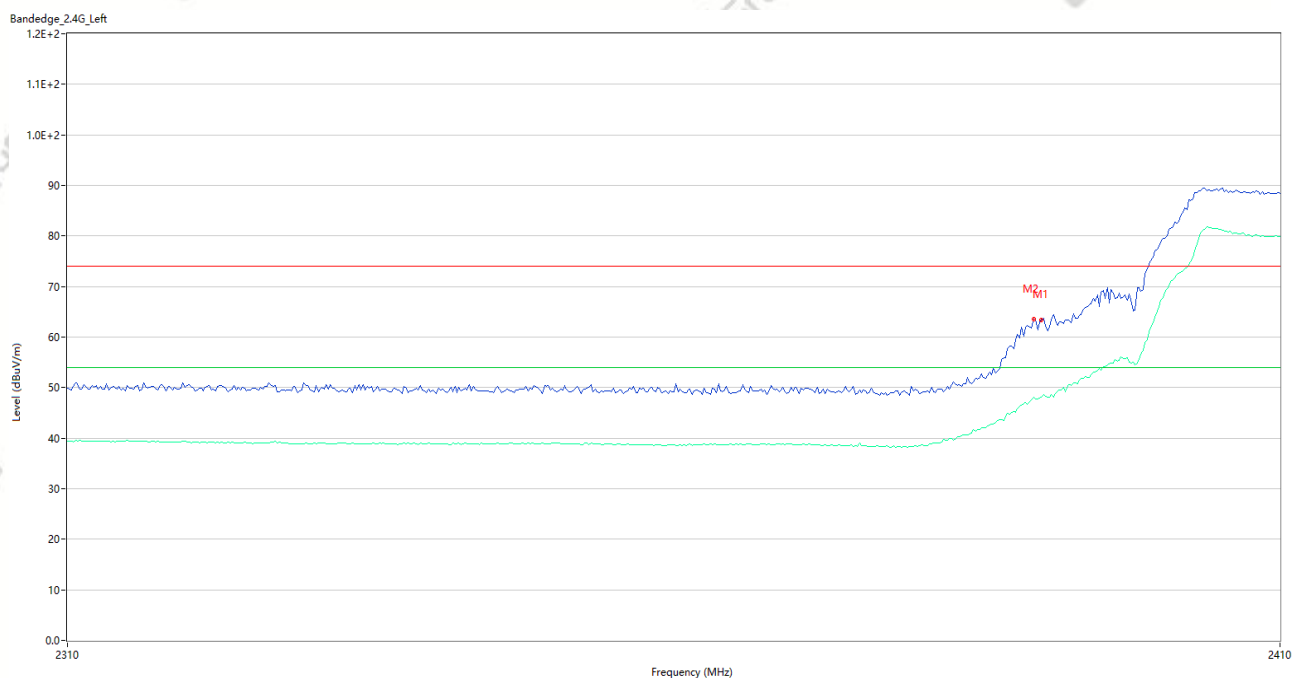
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n20 CH1 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	63.44	-3.58	74.0	10.56	Peak	104.19	150	Horizontal	Pass
1**	2390.000	48.08	-3.58	54.0	5.92	AV	104.19	150	Horizontal	Pass
2	2389.333	63.52	-3.60	74.0	10.48	Peak	293.00	150	Horizontal	Pass
2**	2389.333	48.11	-3.60	54.0	5.89	AV	293.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.27.21

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

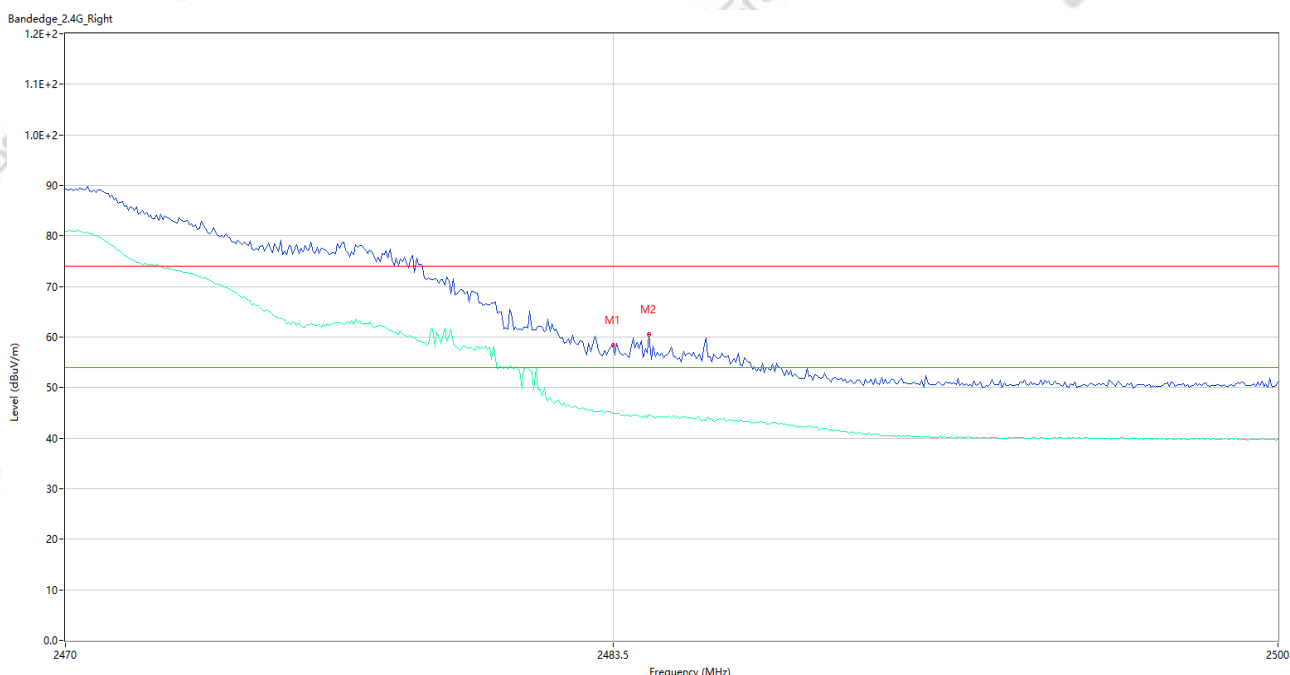
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n20 CH11 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.37	-2.55	74.0	15.63	Peak	262.00	150	Vertical	Pass
1**	2483.500	44.99	-2.55	54.0	9.01	AV	262.00	150	Vertical	Pass
2	2484.400	60.56	-2.54	74.0	13.44	Peak	286.00	150	Vertical	Pass
2**	2484.400	44.65	-2.54	54.0	9.35	AV	286.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.25.27

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

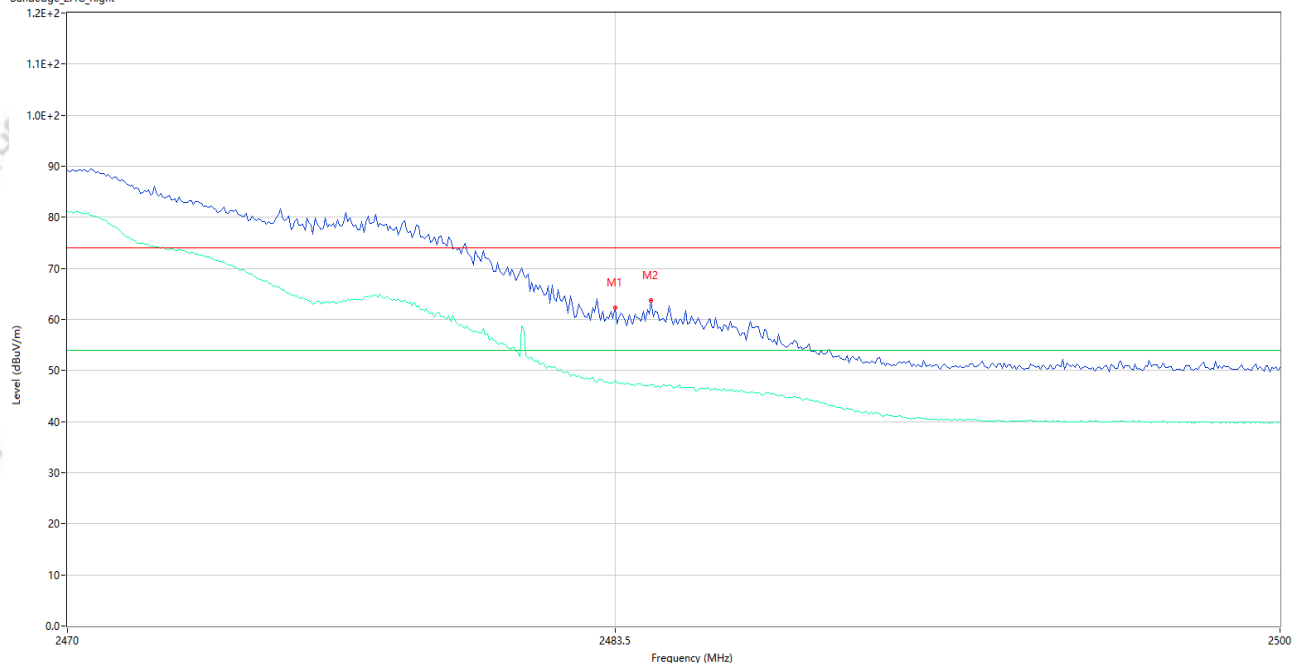
Test Site: 966#1

Test Mode: 2.4G WIFI 11n20 CH11 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

Bandedge_2.4G_Right



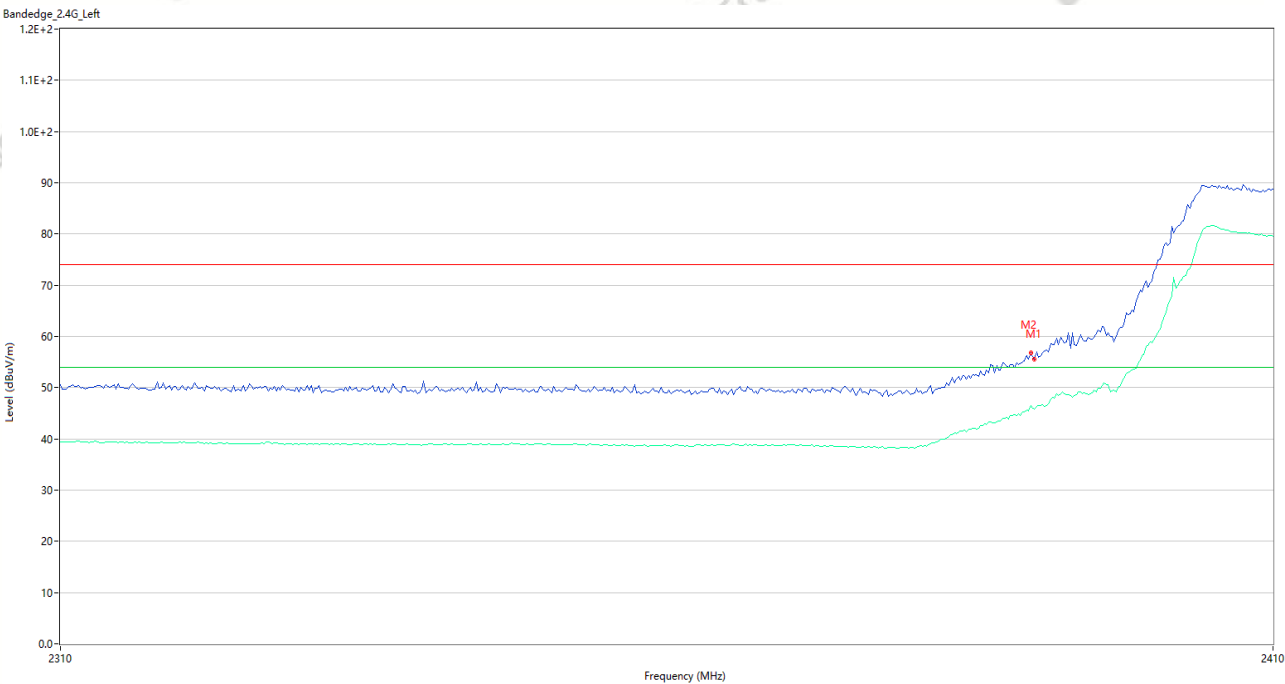
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	62.33	-2.55	74.0	11.67	Peak	318.00	150	Horizontal	Pass
1**	2483.500	48.14	-2.55	54.0	5.86	AV	318.00	150	Horizontal	Pass
2	2484.400	63.71	-2.54	74.0	10.29	Peak	3.00	150	Horizontal	Pass
2**	2484.400	47.21	-2.54	54.0	6.79	AV	3.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.22.54

EUT Name:	Mobile Computer	Temp.(°C):	23
Model Number:	RS20	Humidity (%RH):	58
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Test Voltage:	AC 120V/60Hz
Test Site:	966#1	Test Mode:	2.4G WIFI 11n40 CH3 P=17.5
Test Engineer:	Zhang Siyuan	Remark:	适配器: A11+数据线: A58 ANT1



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	55.59	-3.58	74.0	18.41	Peak	17.26	150	Vertical	Pass
1**	2390.000	58.75	-3.58	54.0	8.25	AV	17.26	150	Vertical	Pass
2	2389.667	56.86	-3.59	74.0	17.14	Peak	269.00	150	Vertical	Pass
2**	2389.667	46.59	-3.59	54.0	7.41	AV	269.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.20.37

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

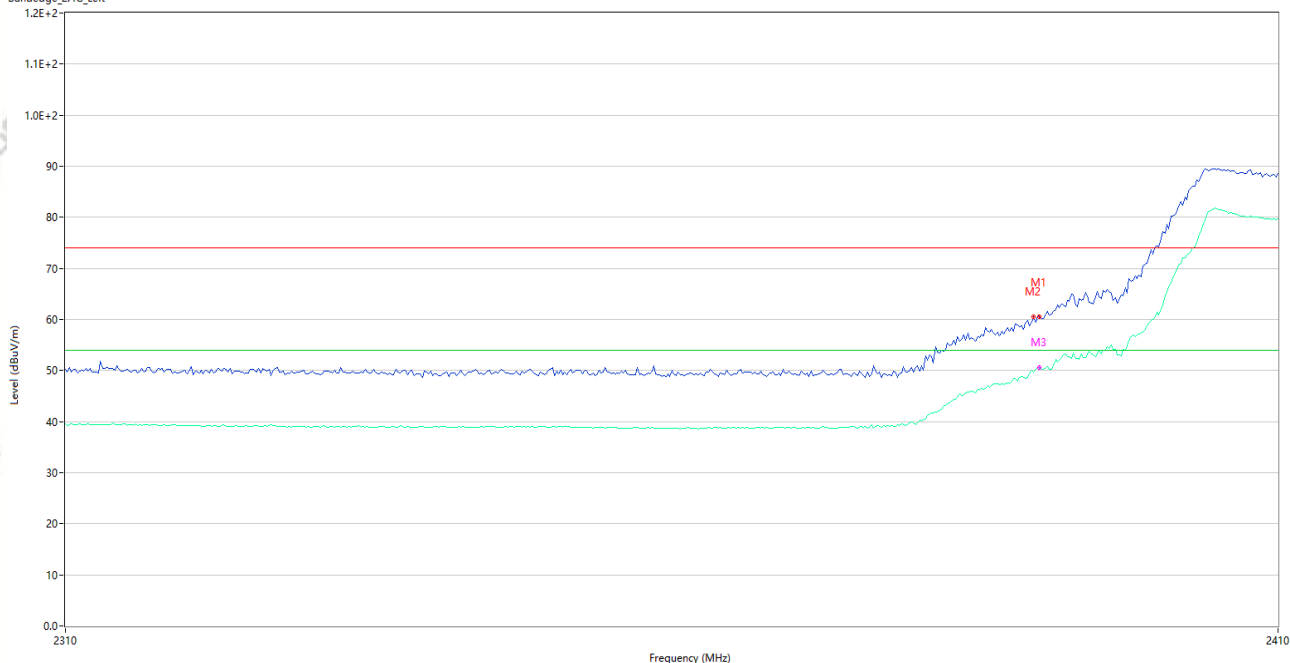
Test Site: 966#1

Test Mode: 2.4G WIFI 11n40 CH3 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

Bandedge_2.4G_Left



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	60.60	-3.58	74.0	13.40	Peak	0.08	150	Horizontal	Pass
1**	2390.000	50.62	-3.58	54.0	3.38	AV	0.08	150	Horizontal	Pass
2	2389.500	60.58	-3.60	74.0	13.42	Peak	5.00	150	Horizontal	Pass
2**	2389.500	49.78	-3.60	54.0	4.22	AV	5.00	150	Horizontal	Pass
3	2390.000	60.60	-3.58	74.0	13.40	Peak	0.00	150	Horizontal	Pass
3**	2390.000	50.62	-3.58	54.0	3.38	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.42.31

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

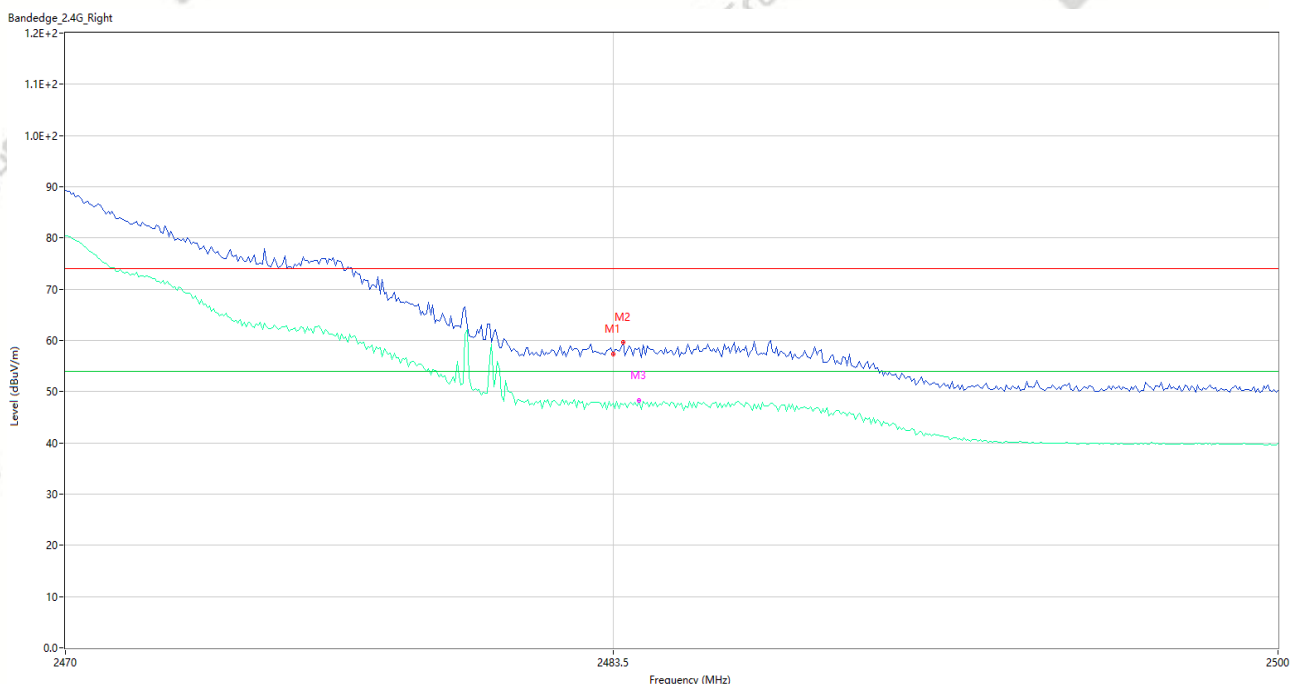
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n40 CH9 P=17

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.39	-2.55	74.0	16.61	Peak	10.00	150	Vertical	Pass
1**	2483.500	47.82	-2.55	54.0	6.18	AV	10.00	150	Vertical	Pass
2	2483.750	59.56	-2.55	74.0	14.44	Peak	289.00	150	Vertical	Pass
2**	2483.750	47.36	-2.55	54.0	6.64	AV	289.00	150	Vertical	Pass
3	2484.150	58.59	-2.54	74.0	15.41	Peak	355.00	150	Vertical	Pass
3**	2484.150	48.28	-2.54	54.0	5.72	AV	355.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.38.58

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

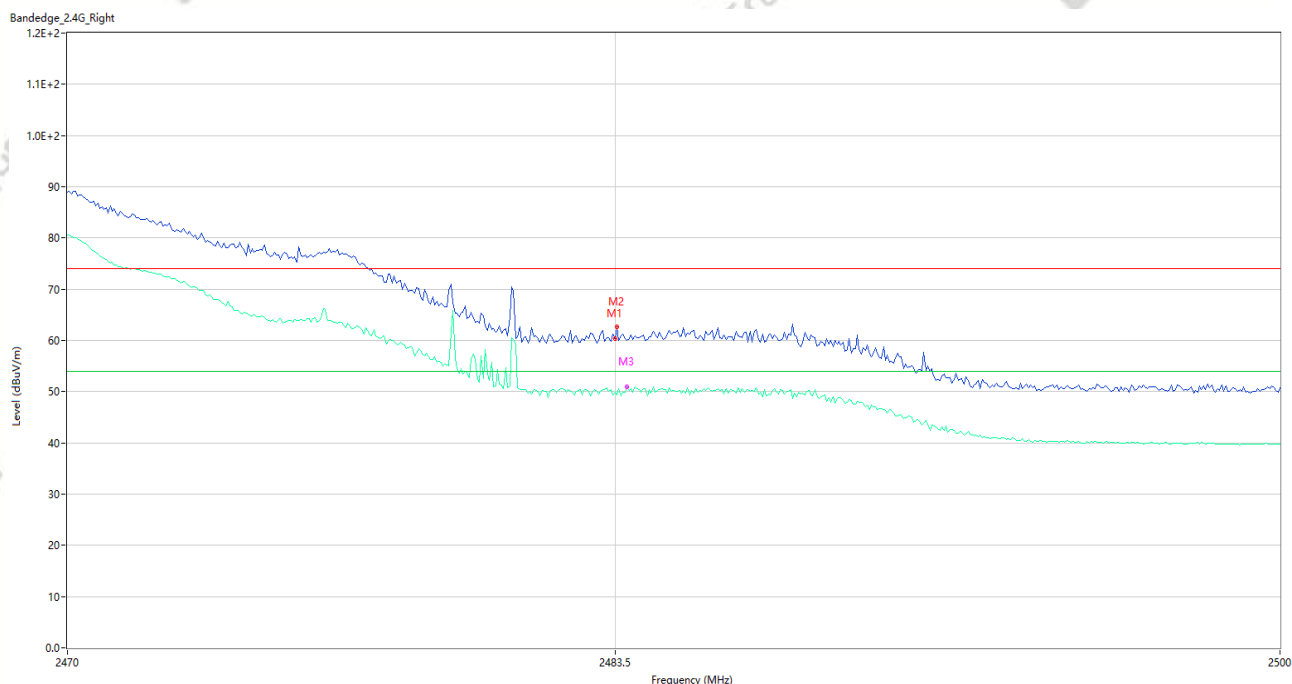
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n40 CH9 P=17

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	60.41	-2.55	74.0	13.59	Peak	298.00	150	Horizontal	Pass
1**	2483.500	49.84	-2.55	54.0	4.16	AV	298.00	150	Horizontal	Pass
2	2483.550	62.58	-2.55	74.0	11.42	Peak	298.00	150	Horizontal	Pass
2**	2483.550	49.35	-2.55	54.0	4.65	AV	298.00	150	Horizontal	Pass
3	2483.800	59.98	-2.55	74.0	14.02	Peak	294.00	150	Horizontal	Pass
3**	2483.800	50.87	-2.55	54.0	3.13	AV	294.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.26.38

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

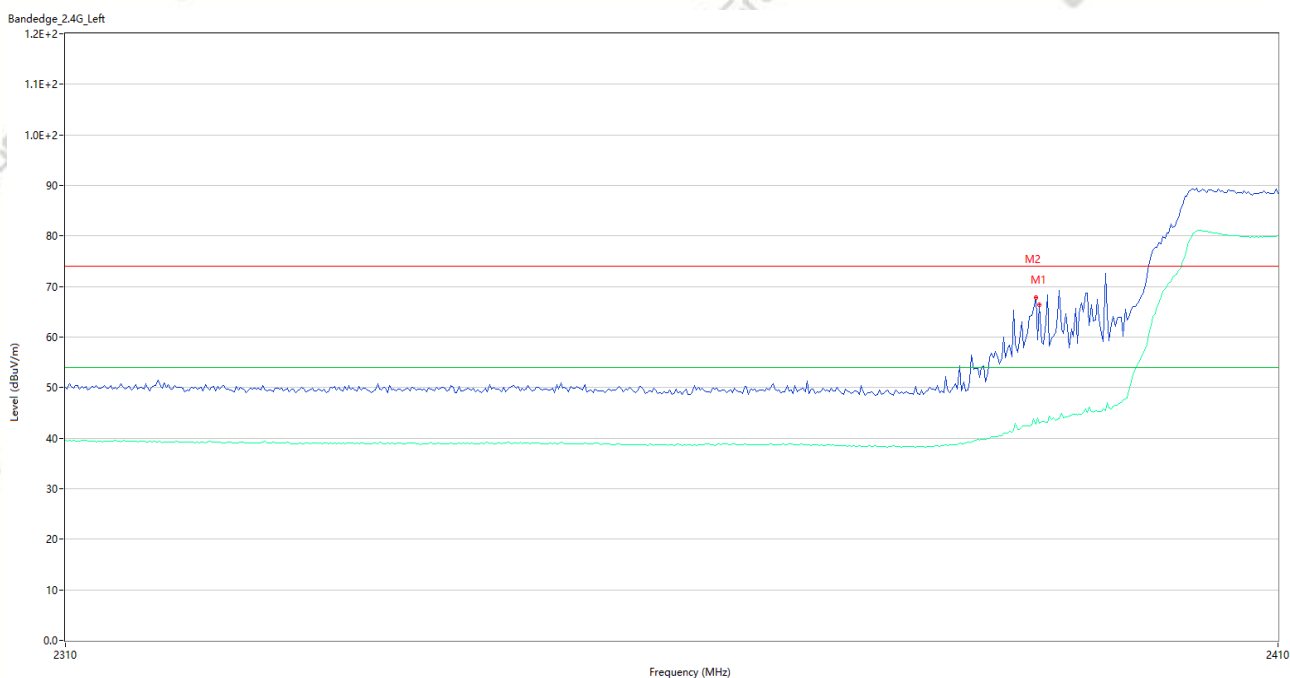
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax20 CH1 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

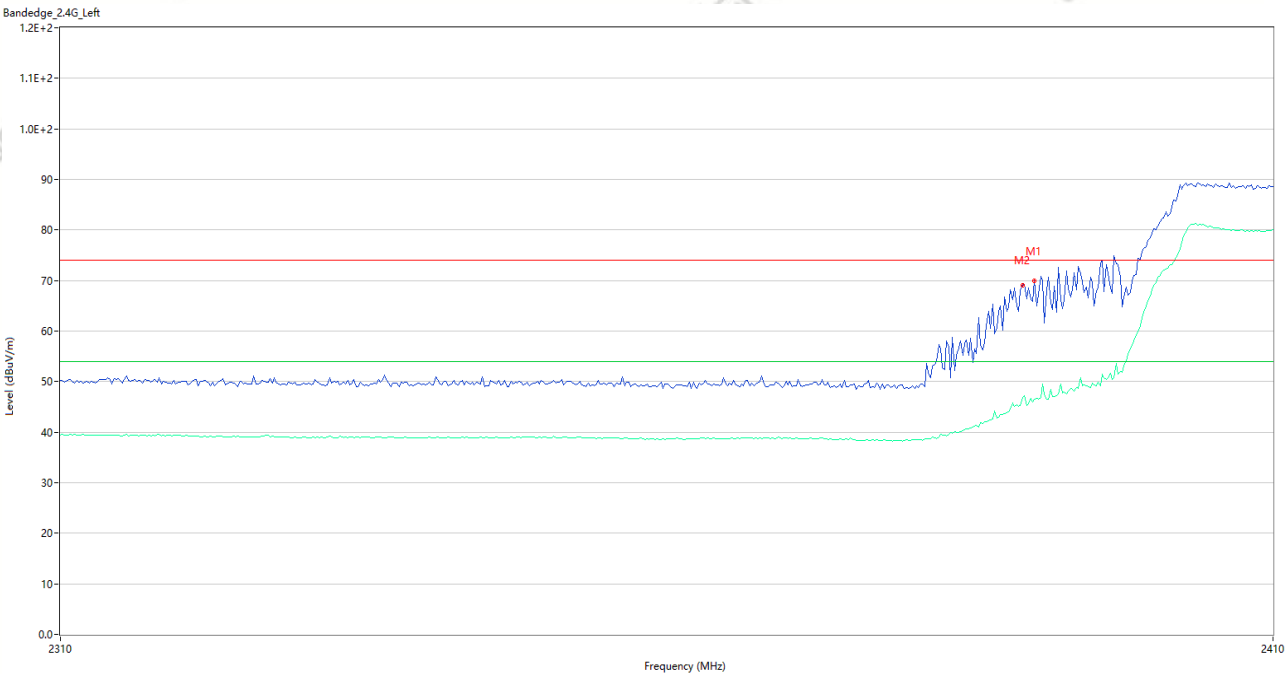
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	66.38	-3.58	74.0	7.62	Peak	322.97	150	Vertical	Pass
1**	2390.000	42.99	-3.58	54.0	11.01	AV	322.97	150	Vertical	Pass
2	2389.667	67.81	-3.59	74.0	6.19	Peak	320.00	150	Vertical	Pass
2**	2389.667	42.71	-3.59	54.0	11.29	AV	320.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.29.13

EUT Name:	Mobile Computer	Temp.(°C):	23
Model Number:	RS20	Humidity (%RH):	58
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Test Voltage:	AC 120V/60Hz
Test Site:	966#1	Test Mode:	2.4G WIFI 11ax20 CH1 P=15
Test Engineer:	Zhang Siyuan	Remark:	适配器: A11+数据线: A58 ANT1



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	69.85	-3.58	74.0	4.15	Peak	324.03	150	Horizontal	Pass
1**	2390.000	46.58	-3.58	54.0	7.55	AV	324.03	150	Horizontal	Pass
2	2389.000	69.02	-3.61	74.0	4.98	Peak	360.00	150	Horizontal	Pass
2**	2389.000	46.79	-3.61	54.0	7.21	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.34.22

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

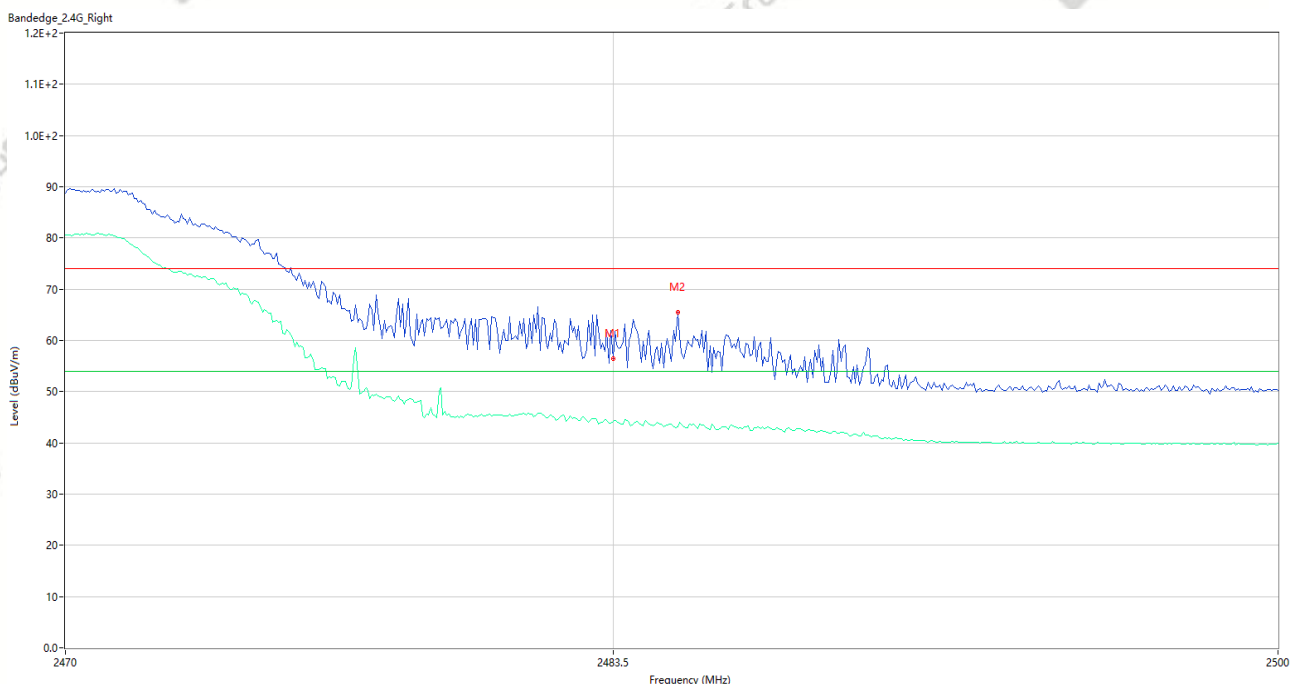
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax20 CH11 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.44	-2.55	74.0	17.56	Peak	358.00	150	Vertical	Pass
1**	2483.500	44.13	-2.55	54.0	9.87	AV	358.00	150	Vertical	Pass
2	2485.100	65.48	-2.53	74.0	8.52	Peak	10.00	150	Vertical	Pass
2**	2485.100	43.18	-2.53	54.0	10.82	AV	10.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.32.40

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

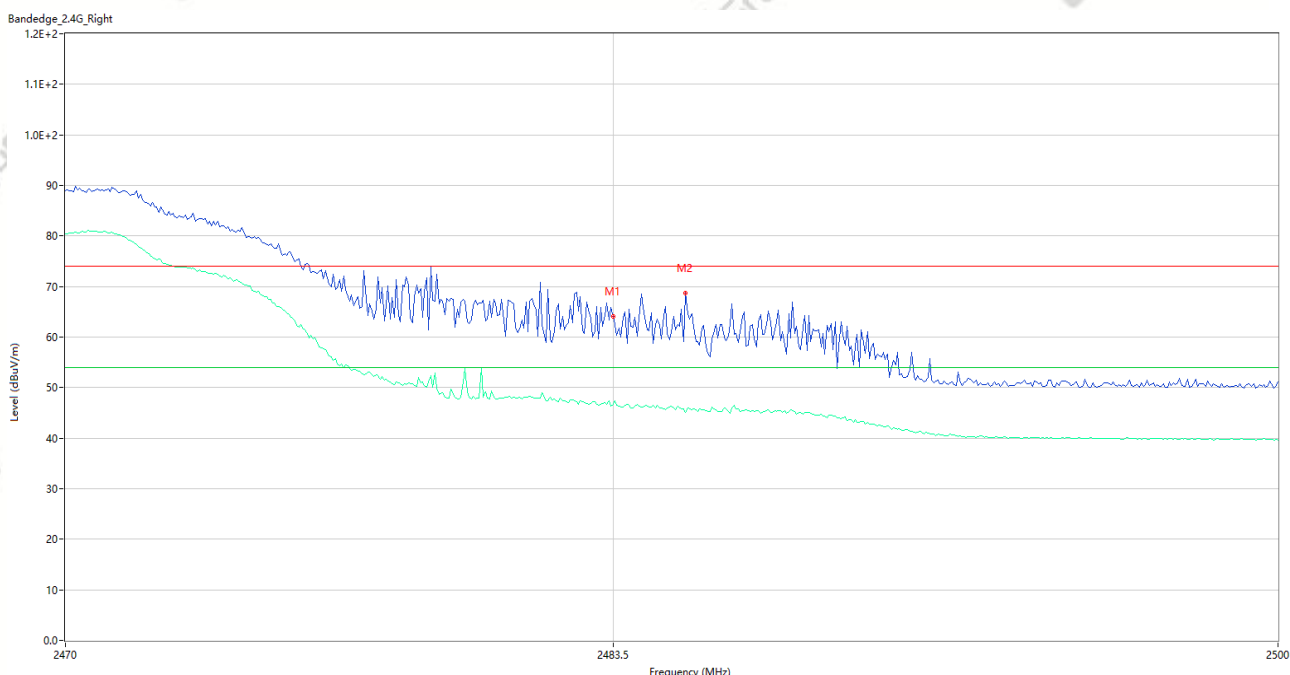
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax20 CH11 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.06	-2.55	74.0	9.94	Peak	139.00	150	Horizontal	Pass
1**	2483.500	46.76	-2.55	54.0	7.24	AV	139.00	150	Horizontal	Pass
2	2485.300	68.70	-2.52	74.0	5.30	Peak	290.00	150	Horizontal	Pass
2**	2485.300	58.07	-2.52	54.0	8.93	AV	290.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.48.50

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

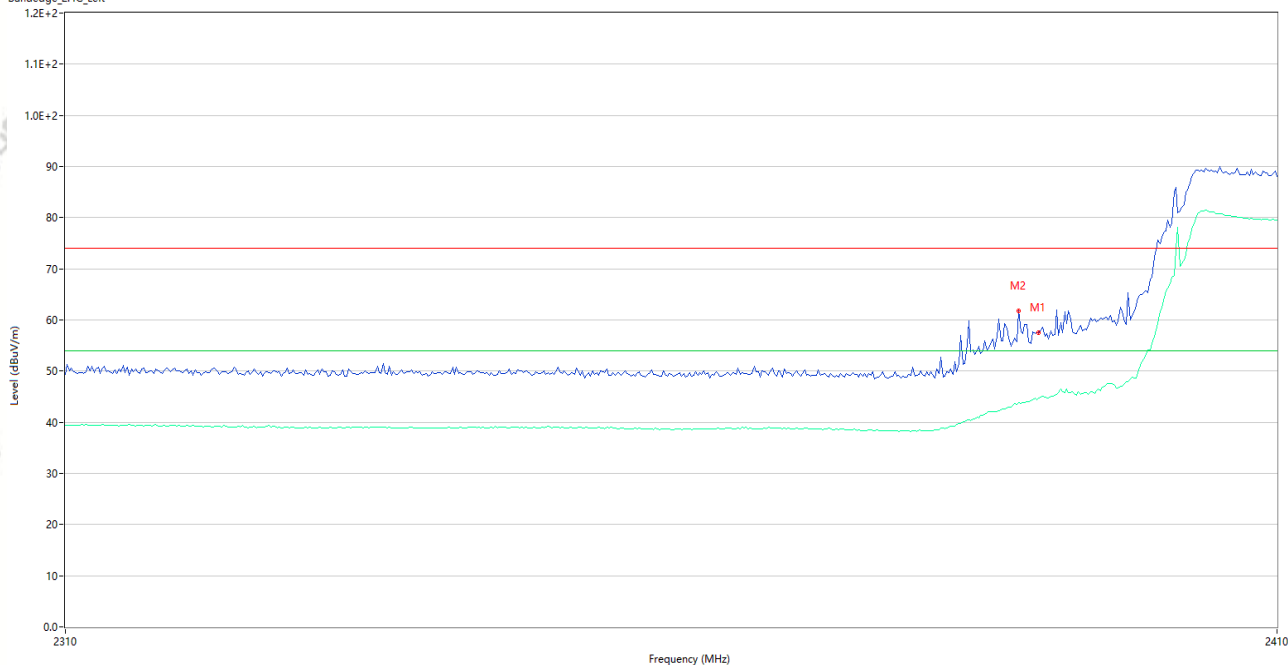
Test Site: 966#1

Test Mode: 2.4G WIFI 11ax40 CH3 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

Bandedge_2.4G_Left



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.48	-3.58	74.0	16.52	Peak	332.01	150	Vertical	Pass
1**	2390.000	44.80	-3.58	54.0	9.20	AV	332.01	150	Vertical	Pass
2	2388.333	61.76	-3.64	74.0	12.24	Peak	274.00	150	Vertical	Pass
2**	2388.333	43.78	-3.64	54.0	10.22	AV	274.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.47.30

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

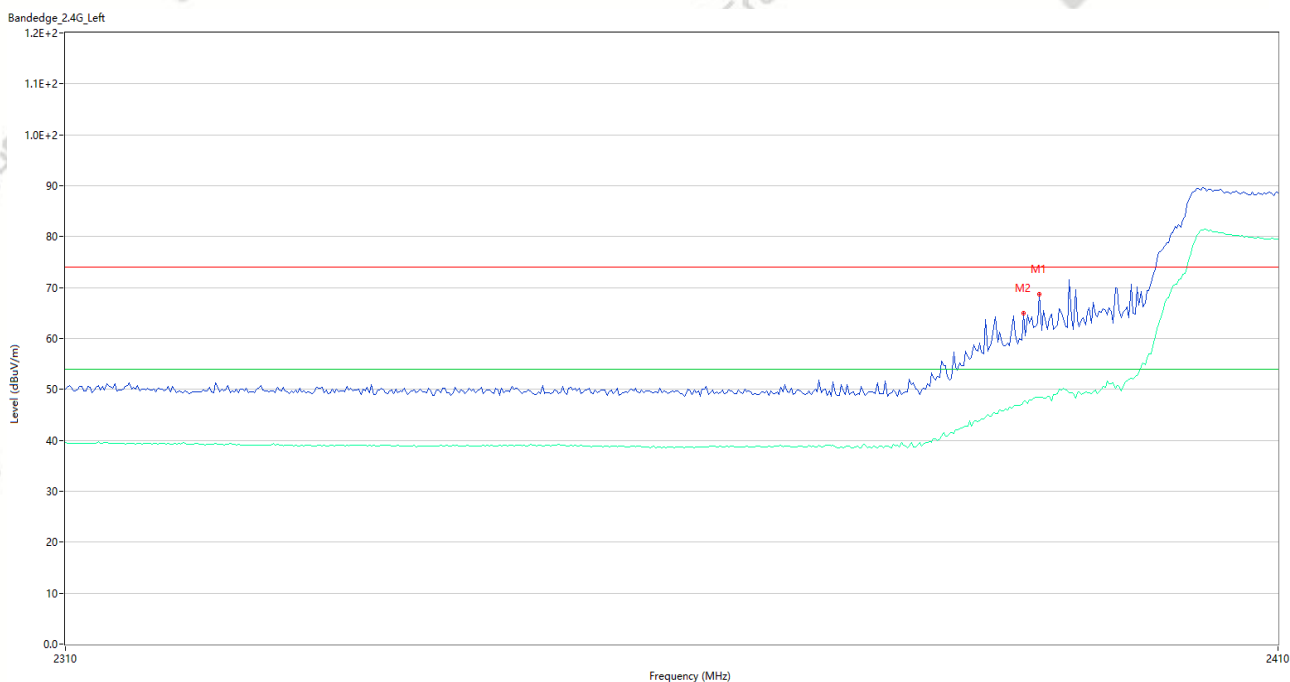
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax40 CH3 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	68.68	-3.58	74.0	5.32	Peak	86.94	150	Horizontal	Pass
1**	2390.000	48.43	-3.58	54.0	5.57	AV	86.94	150	Horizontal	Pass
2	2388.667	65.01	-3.62	74.0	8.99	Peak	12.00	150	Horizontal	Pass
2**	2388.667	47.55	-3.62	54.0	6.58	AV	12.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.39.55

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

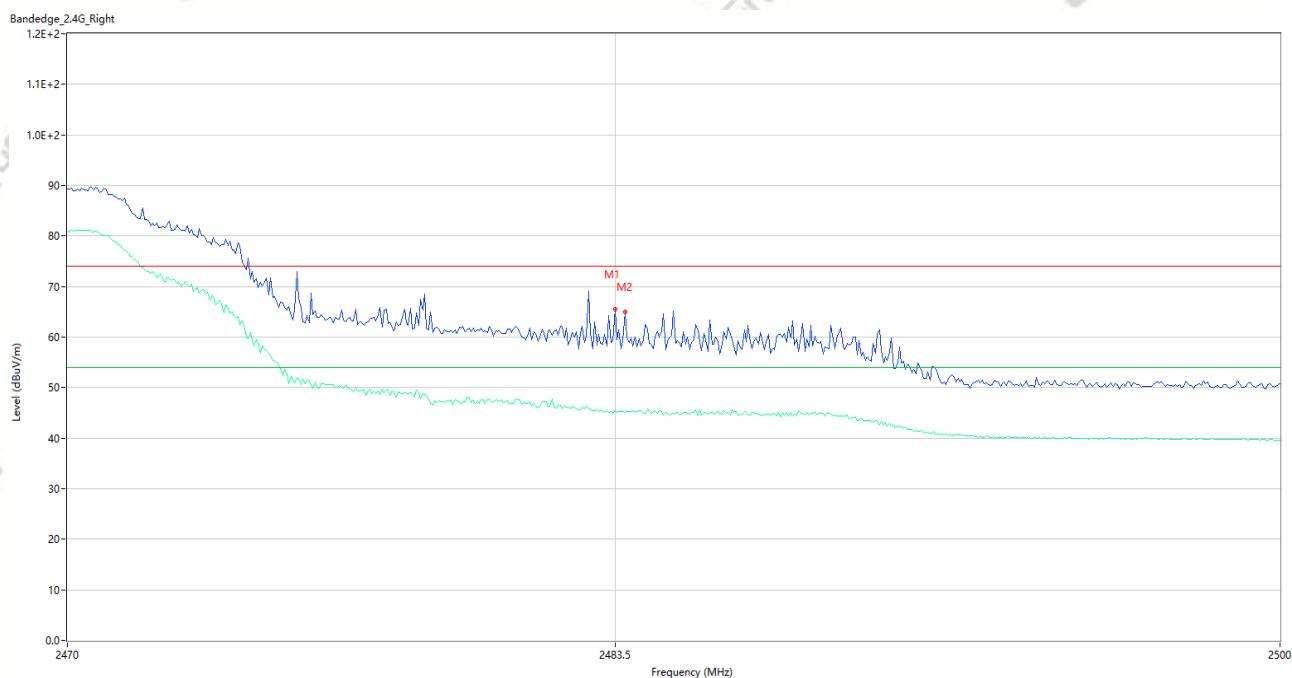
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax40 CH9 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	65.47	-2.55	74.0	8.53	Peak	278.00	150	Vertical	Pass
1**	2483.500	58.56	-2.55	54.0	8.44	AV	278.00	150	Vertical	Pass
2	2483.750	64.92	-2.55	74.0	9.08	Peak	246.00	150	Vertical	Pass
2**	2483.750	58.18	-2.55	54.0	8.82	AV	246.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.41.21

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

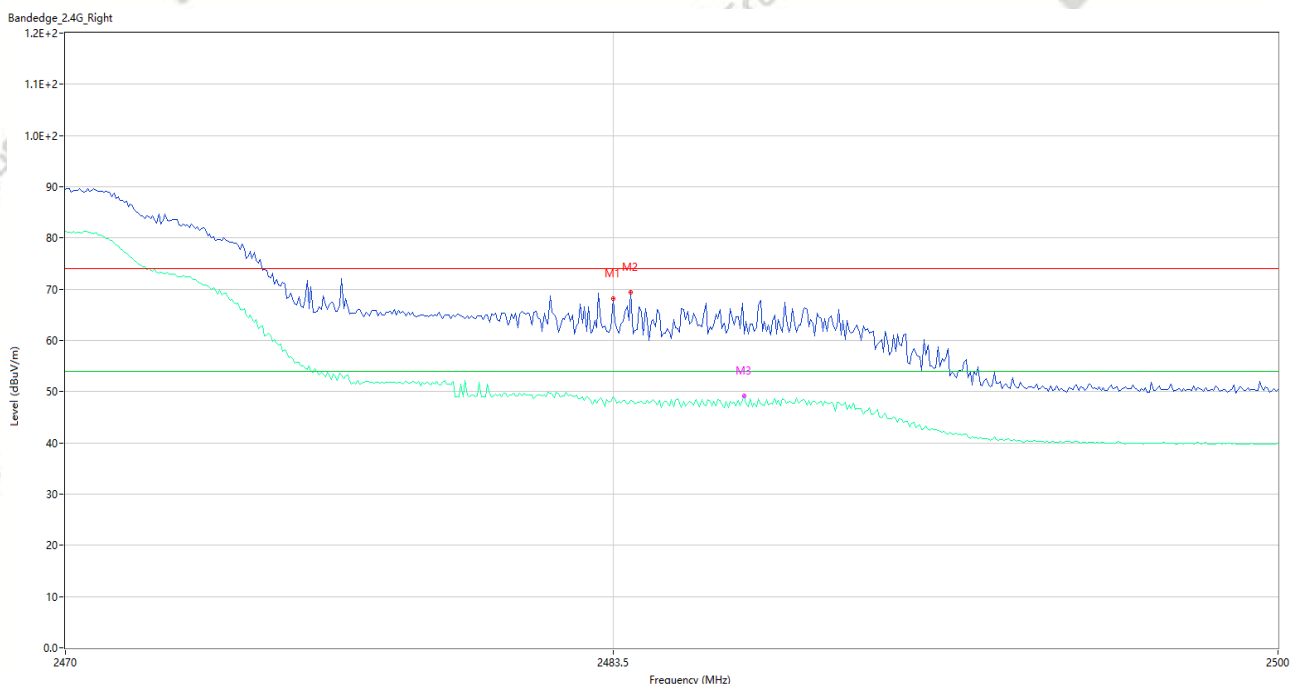
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax40 CH9 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	68.21	-2.55	74.0	5.79	Peak	337.00	150	Horizontal	Pass
1**	2483.500	48.95	-2.55	54.0	5.05	AV	337.00	150	Horizontal	Pass
2	2483.950	69.33	-2.54	74.0	4.67	Peak	360.00	150	Horizontal	Pass
2**	2483.950	48.34	-2.54	54.0	5.66	AV	360.00	150	Horizontal	Pass
3	2486.750	61.28	-2.50	74.0	12.72	Peak	360.00	150	Horizontal	Pass
3**	2486.750	49.09	-2.50	54.0	4.91	AV	360.00	150	Horizontal	Pass

Test Result

Aux. Antenna

Project Number: P-CC26060546

Test Time: 2026-07-19_10.04.20

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

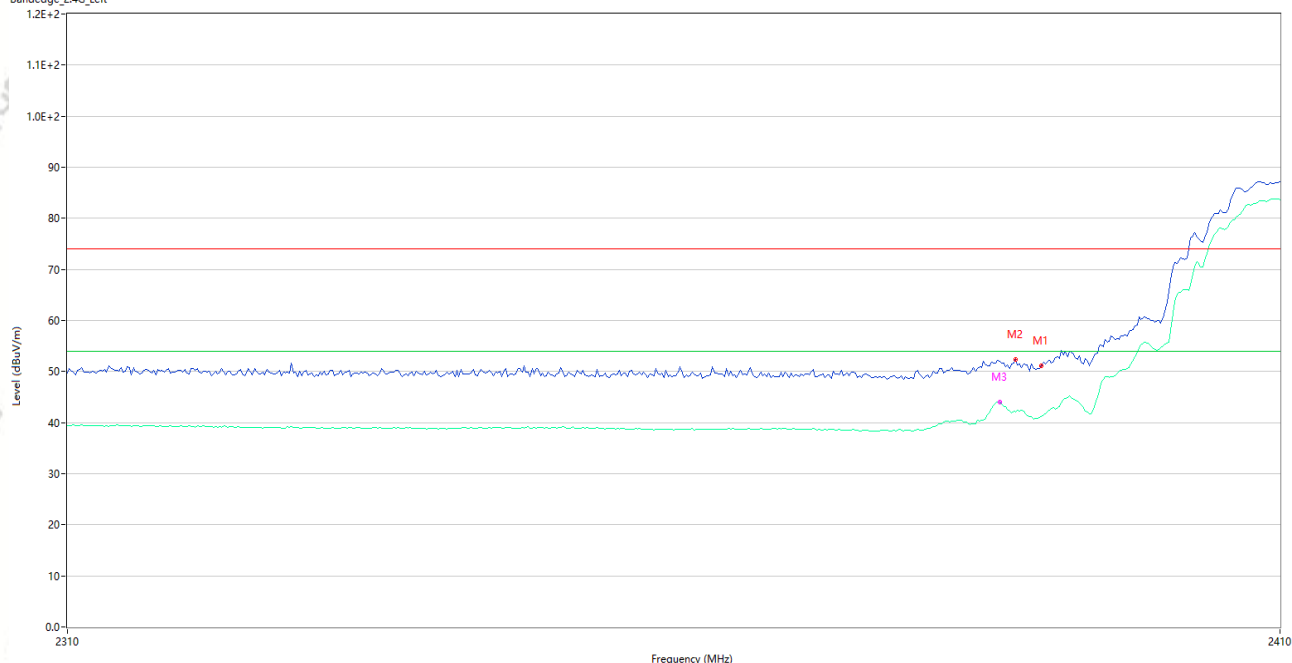
Test Site: 966#1

Test Mode: 2.4G WIFI 11b CH1 P=20

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

Bandedge_2.4G_Left



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.06	-3.58	74.0	22.94	Peak	349.98	150	Vertical	Pass
1**	2390.000	41.10	-3.58	54.0	12.90	AV	349.98	150	Vertical	Pass
2	2387.833	52.37	-3.65	74.0	21.63	Peak	333.00	150	Vertical	Pass
2**	2387.833	42.13	-3.65	54.0	11.87	AV	333.00	150	Vertical	Pass
3	2386.500	51.96	-3.70	74.0	22.04	Peak	272.00	150	Vertical	Pass
3**	2386.500	44.02	-3.70	54.0	9.98	AV	272.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.07.18

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11b CH1 P=20

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

Bandedge_2.4G_Left



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.91	-3.58	74.0	21.09	Peak	56.96	150	Horizontal	Pass
1**	2390.000	43.24	-3.58	54.0	10.76	AV	56.96	150	Horizontal	Pass
2	2385.667	56.09	-3.73	74.0	17.91	Peak	134.00	150	Horizontal	Pass
2**	2385.667	46.25	-3.73	54.0	7.75	AV	134.00	150	Horizontal	Pass
3	2386.333	54.95	-3.70	74.0	19.05	Peak	346.00	150	Horizontal	Pass
3**	2386.333	48.03	-3.70	54.0	5.97	AV	346.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.14.23

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

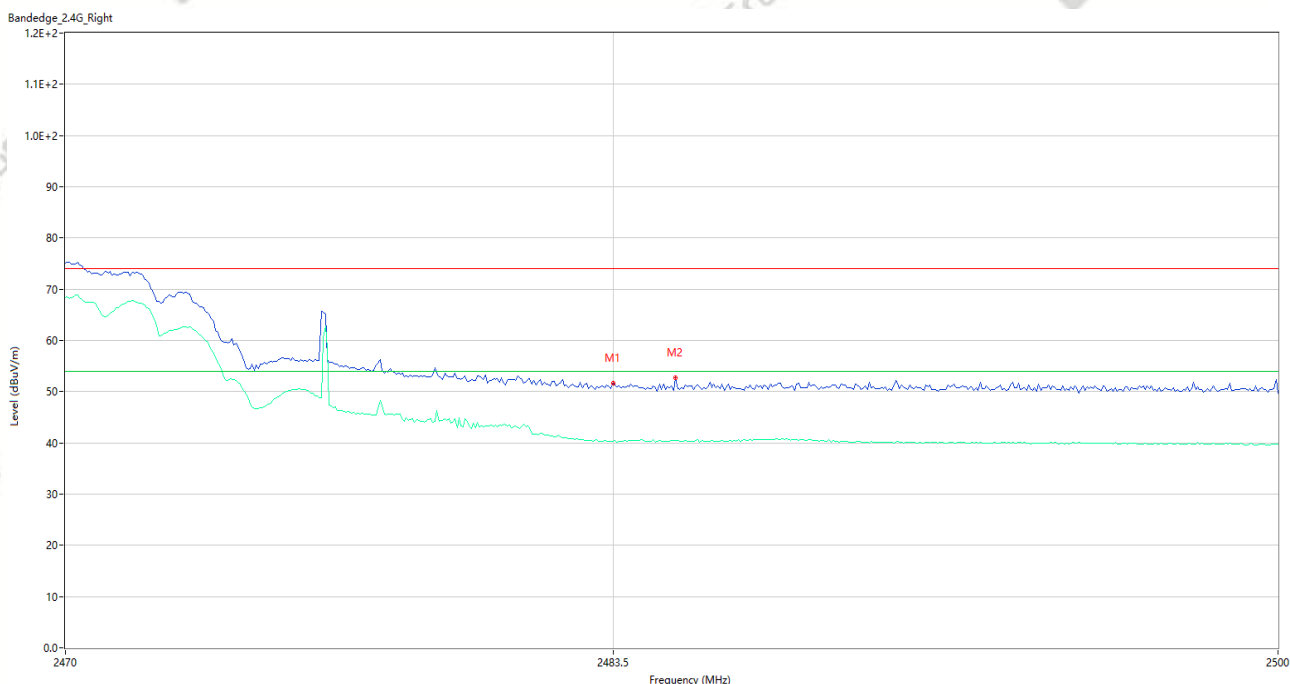
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11b CH11 P=20

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.64	-2.55	74.0	22.36	Peak	352.00	150	Vertical	Pass
1**	2483.500	40.27	-2.55	54.0	13.73	AV	352.00	150	Vertical	Pass
2	2485.050	52.66	-2.53	74.0	21.34	Peak	74.00	150	Vertical	Pass
2**	2485.050	40.46	-2.53	54.0	13.54	AV	74.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.12.12

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

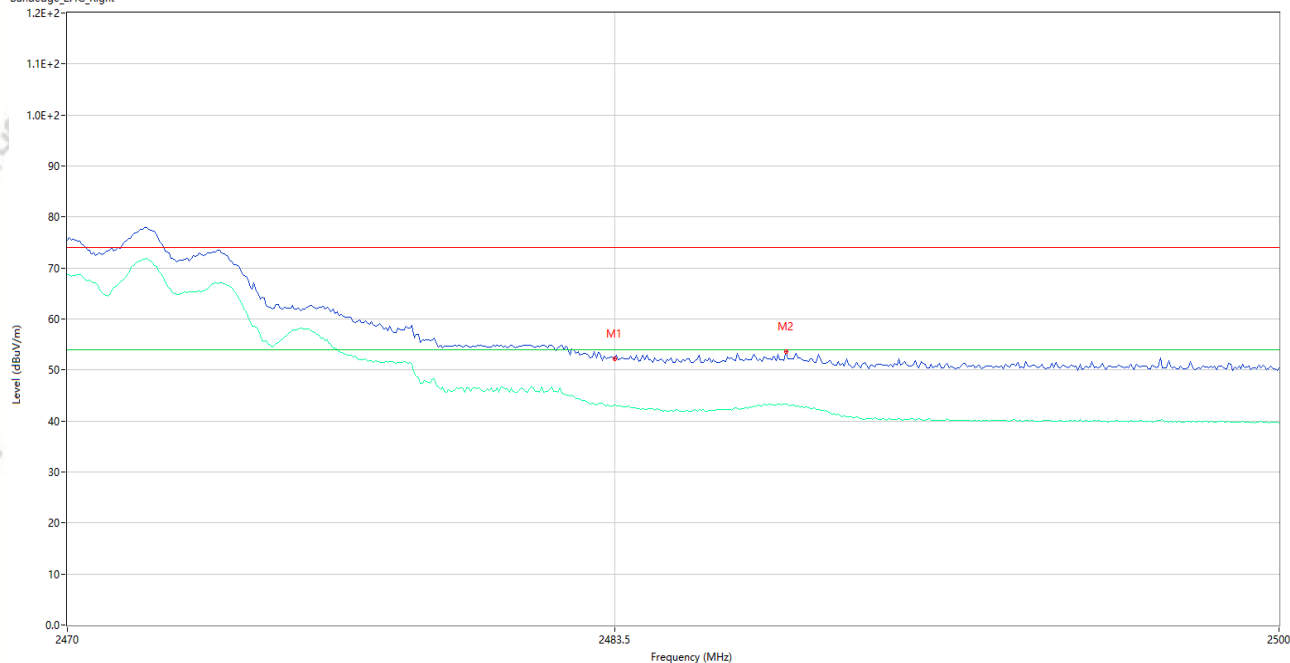
Test Site: 966#1

Test Mode: 2.4G WIFI 11b CH11 P=20

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

Bandedge_2.4G_Right



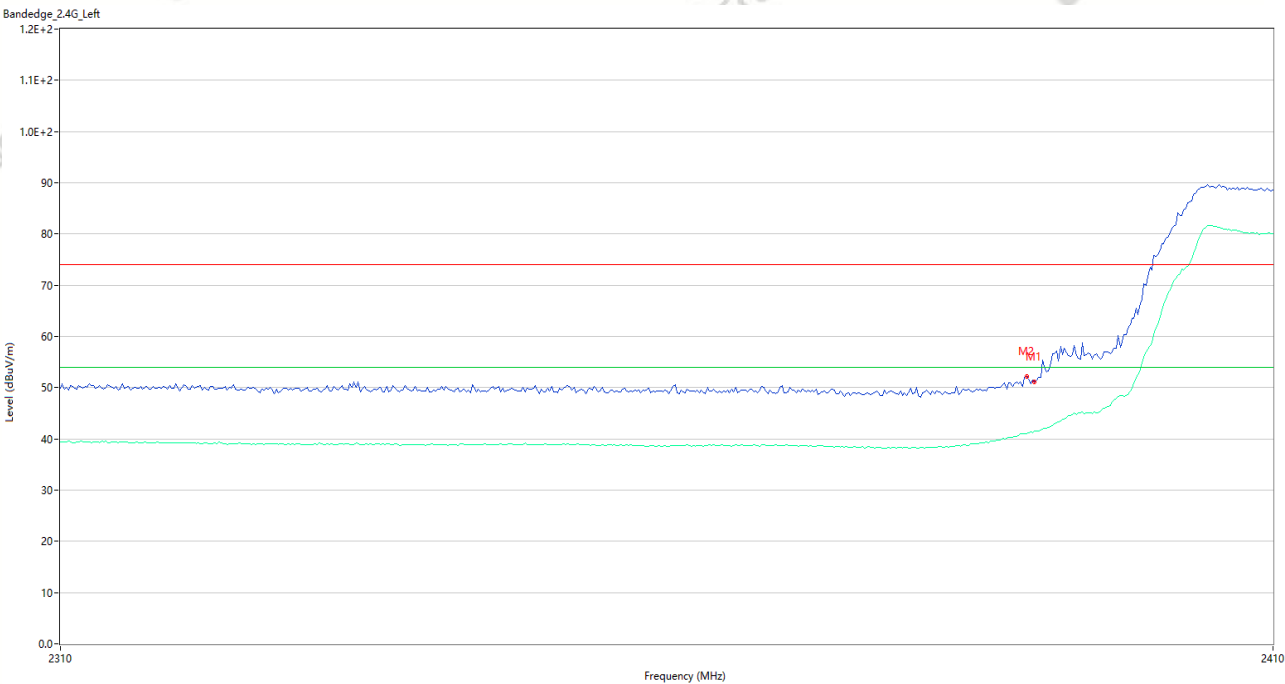
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.27	-2.55	74.0	21.73	Peak	41.00	150	Horizontal	Pass
1**	2483.500	43.16	-2.55	54.0	10.84	AV	41.00	150	Horizontal	Pass
2	2487.750	53.67	-2.48	74.0	20.33	Peak	50.00	150	Horizontal	Pass
2**	2487.750	43.29	-2.48	54.0	10.71	AV	50.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.42.22

EUT Name:	Mobile Computer	Temp.(°C):	23
Model Number:	RS20	Humidity (%RH):	58
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Test Voltage:	AC 120V/60Hz
Test Site:	966#1	Test Mode:	2.4G WIFI 11g CH1 P=17.5
Test Engineer:	Zhang Siyuan	Remark:	适配器: A11+数据线: A58 ANT2



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.14	-3.58	74.0	22.86	Peak	357.73	150	Vertical	Pass
1**	2390.000	41.52	-3.58	54.0	12.48	AV	357.73	150	Vertical	Pass
2	2389.333	52.14	-3.60	74.0	21.86	Peak	68.00	150	Vertical	Pass
2**	2389.333	41.08	-3.60	54.0	12.92	AV	68.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.40.58

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

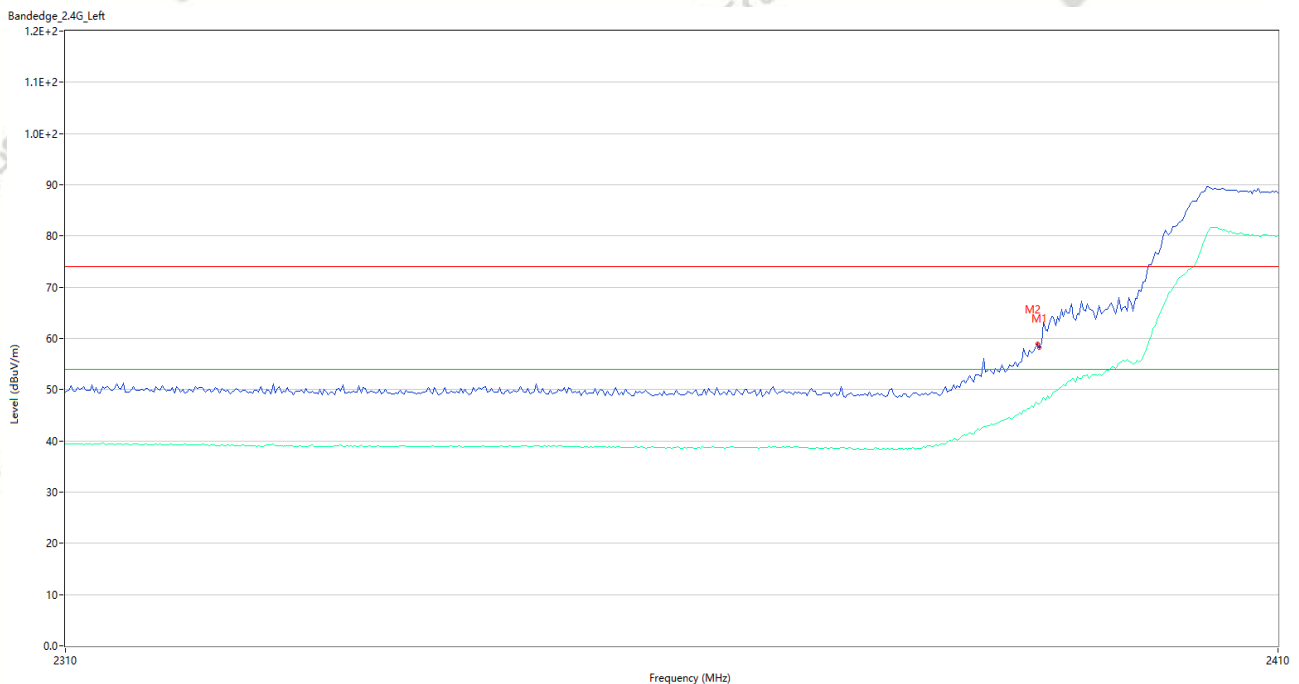
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11g CH1 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	58.20	-3.58	74.0	15.80	Peak	49.00	150	Horizontal	Pass
1**	2390.000	47.29	-3.58	54.0	6.71	AV	49.00	150	Horizontal	Pass
2	2389.833	58.92	-3.59	74.0	15.08	Peak	49.00	150	Horizontal	Pass
2**	2389.833	47.14	-3.59	54.0	6.86	AV	49.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.34.01

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

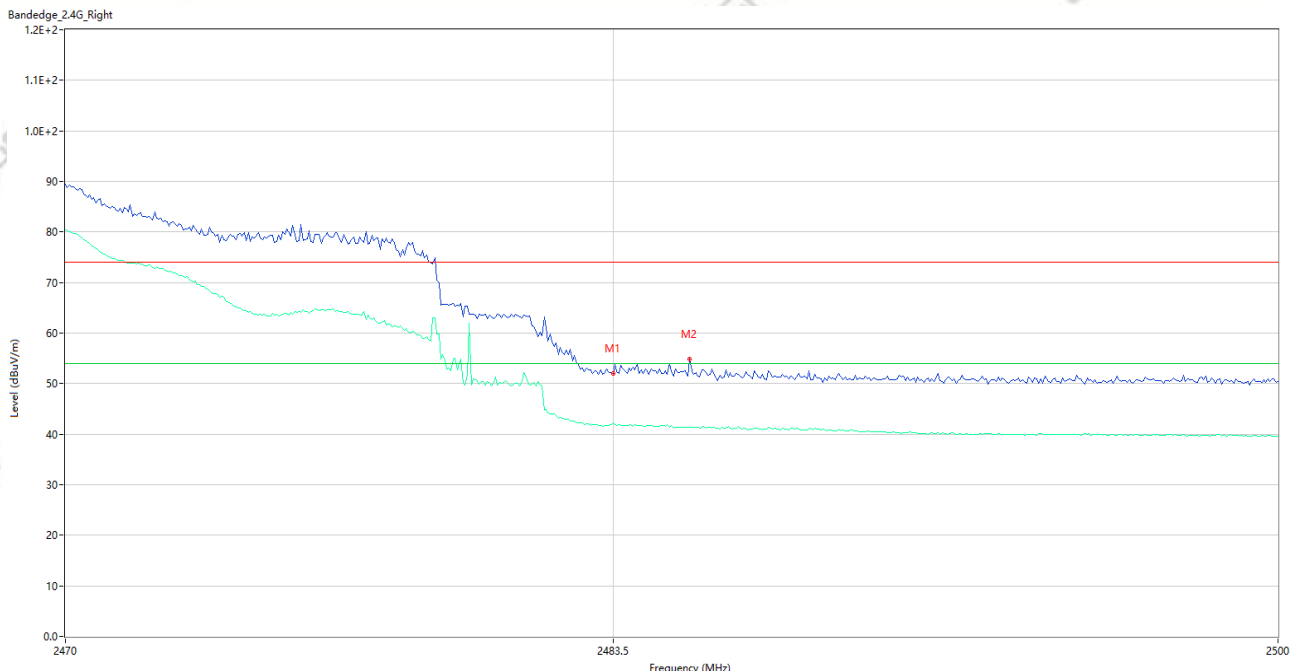
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11g CH11 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.09	-2.55	74.0	21.91	Peak	358.00	150	Vertical	Pass
1**	2483.500	42.00	-2.55	54.0	12.00	AV	358.00	150	Vertical	Pass
2	2485.400	54.84	-2.52	74.0	19.16	Peak	334.00	150	Vertical	Pass
2**	2485.400	41.39	-2.52	54.0	12.61	AV	334.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_10.36.22

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

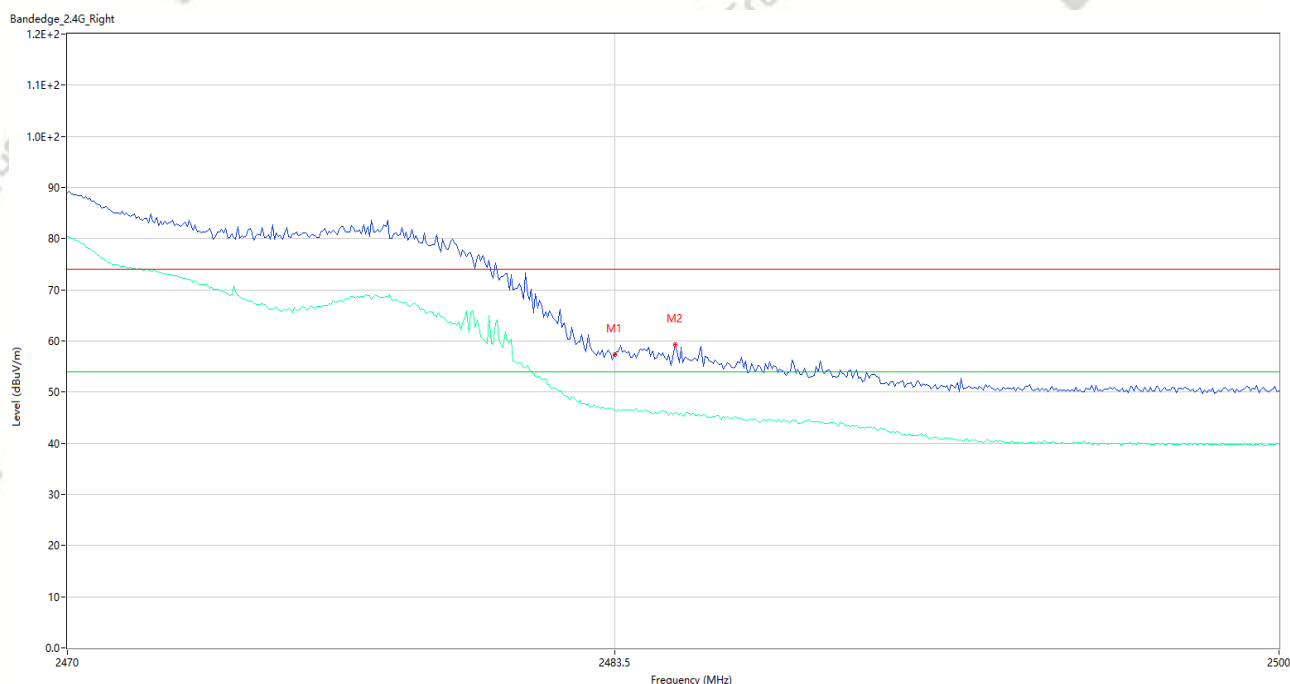
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11g CH11 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

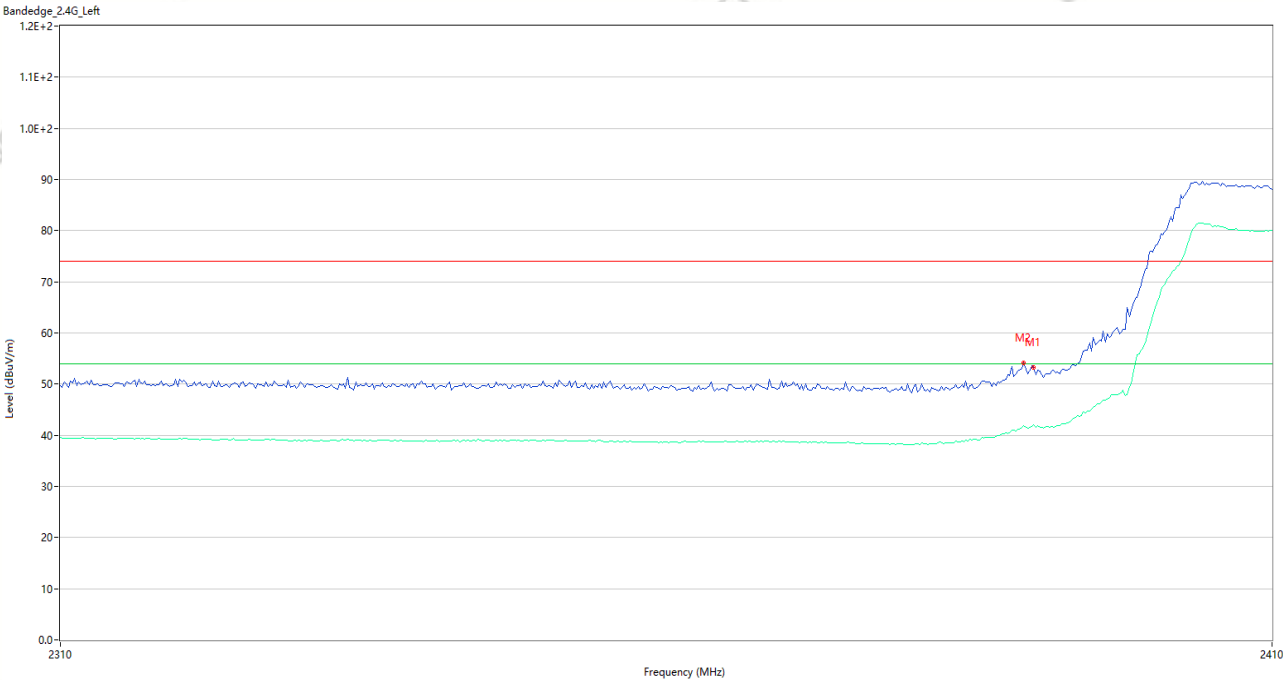
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.42	-2.55	74.0	16.58	Peak	37.00	150	Horizontal	Pass
1**	2483.500	46.56	-2.55	54.0	7.44	AV	37.00	150	Horizontal	Pass
2	2485.000	59.37	-2.53	74.0	14.63	Peak	49.00	150	Horizontal	Pass
2**	2485.000	58.95	-2.53	54.0	8.05	AV	49.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.07.48

EUT Name:	Mobile Computer	Temp.(°C):	23
Model Number:	RS20	Humidity (%RH):	58
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Test Voltage:	AC 120V/60Hz
Test Site:	966#1	Test Mode:	2.4G WIFI 11n20 CH1 P=17.5
Test Engineer:	Zhang Siyuan	Remark:	适配器: A11+数据线: A58 ANT2



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	53.20	-3.58	74.0	20.80	Peak	324.75	150	Vertical	Pass
1**	2390.000	42.03	-3.58	54.0	11.97	AV	324.75	150	Vertical	Pass
2	2389.167	54.09	-3.61	74.0	19.91	Peak	340.00	150	Vertical	Pass
2**	2389.167	41.81	-3.61	54.0	12.19	AV	340.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.04.00

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

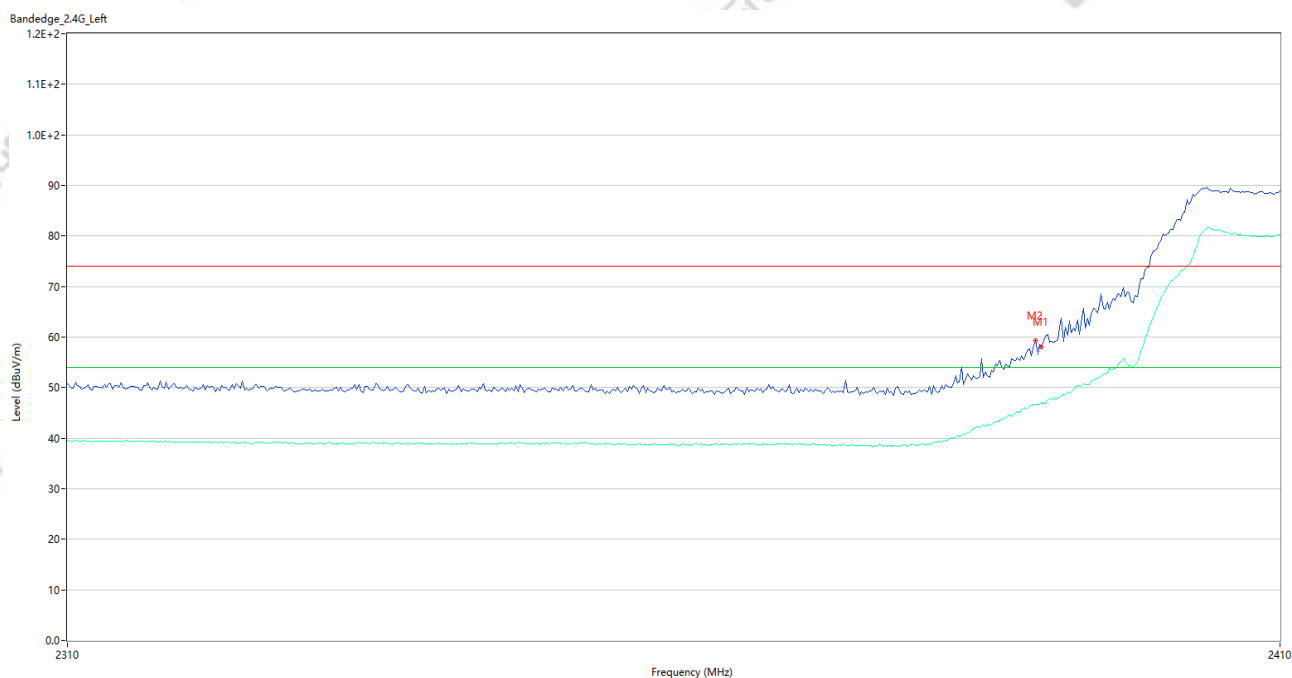
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n20 CH1 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	58.05	-3.58	74.0	15.95	Peak	55.00	150	Horizontal	Pass
1**	2390.000	47.11	-3.58	54.0	6.89	AV	55.00	150	Horizontal	Pass
2	2389.500	59.35	-3.60	74.0	14.65	Peak	48.00	150	Horizontal	Pass
2**	2389.500	46.71	-3.60	54.0	7.29	AV	48.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.12.27

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

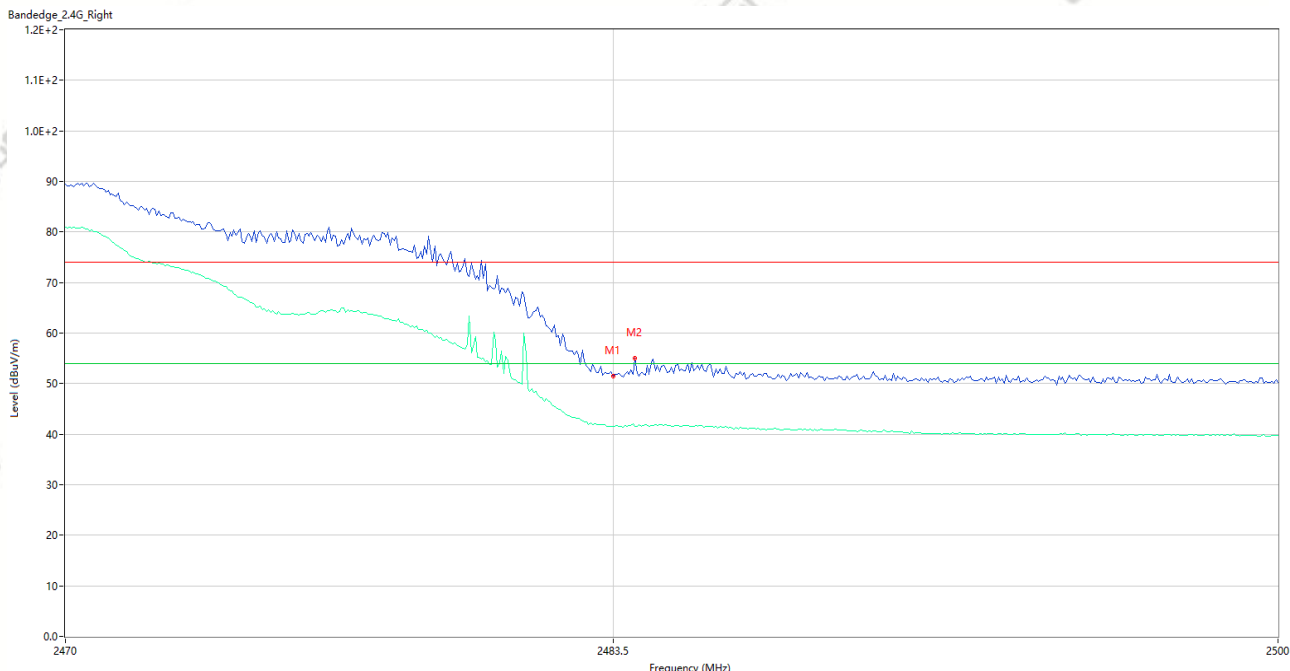
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n20 CH11 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.57	-2.55	74.0	22.43	Peak	360.00	150	Vertical	Pass
1**	2483.500	41.57	-2.55	54.0	12.43	AV	360.00	150	Vertical	Pass
2	2484.050	55.01	-2.54	74.0	18.99	Peak	11.00	150	Vertical	Pass
2**	2484.050	41.58	-2.54	54.0	12.55	AV	11.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.14.17

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

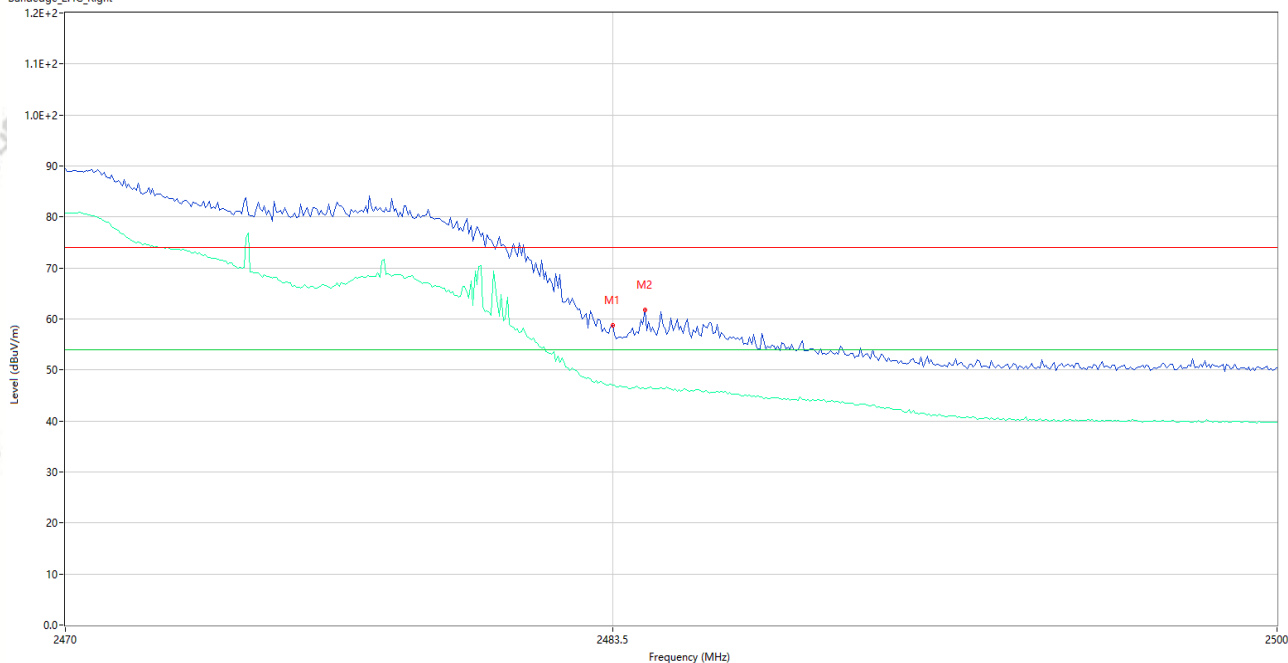
Test Site: 966#1

Test Mode: 2.4G WIFI 11n20 CH11 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

Bandedge_2.4G_Right



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.83	-2.55	74.0	15.17	Peak	52.00	150	Horizontal	Pass
1**	2483.500	47.07	-2.55	54.0	6.93	AV	52.00	150	Horizontal	Pass
2	2484.300	61.72	-2.54	74.0	12.28	Peak	47.00	150	Horizontal	Pass
2**	2484.300	46.38	-2.54	54.0	7.62	AV	47.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.56.08

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

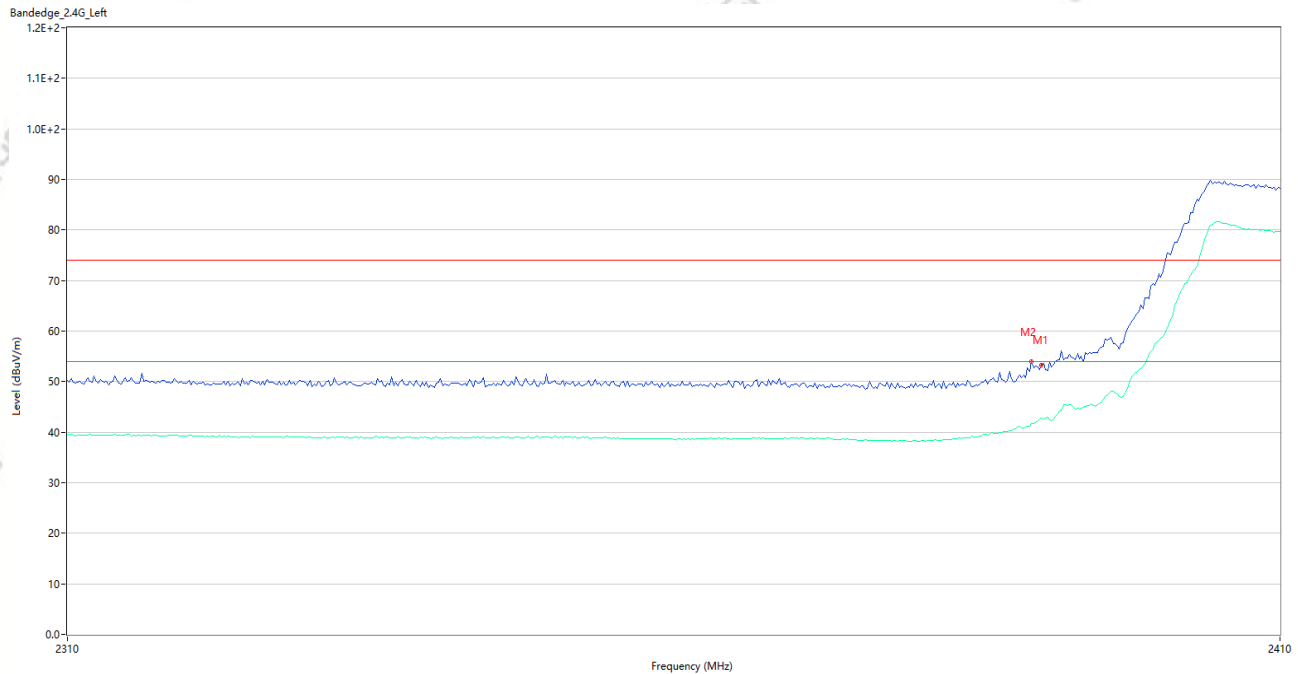
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n40 CH3 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	53.19	-3.58	74.0	20.81	Peak	341.79	150	Vertical	Pass
1**	2390.000	42.80	-3.58	54.0	11.20	AV	341.79	150	Vertical	Pass
2	2389.167	53.98	-3.61	74.0	20.02	Peak	16.00	150	Vertical	Pass
2**	2389.167	41.69	-3.61	54.0	12.31	AV	16.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.54.20

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

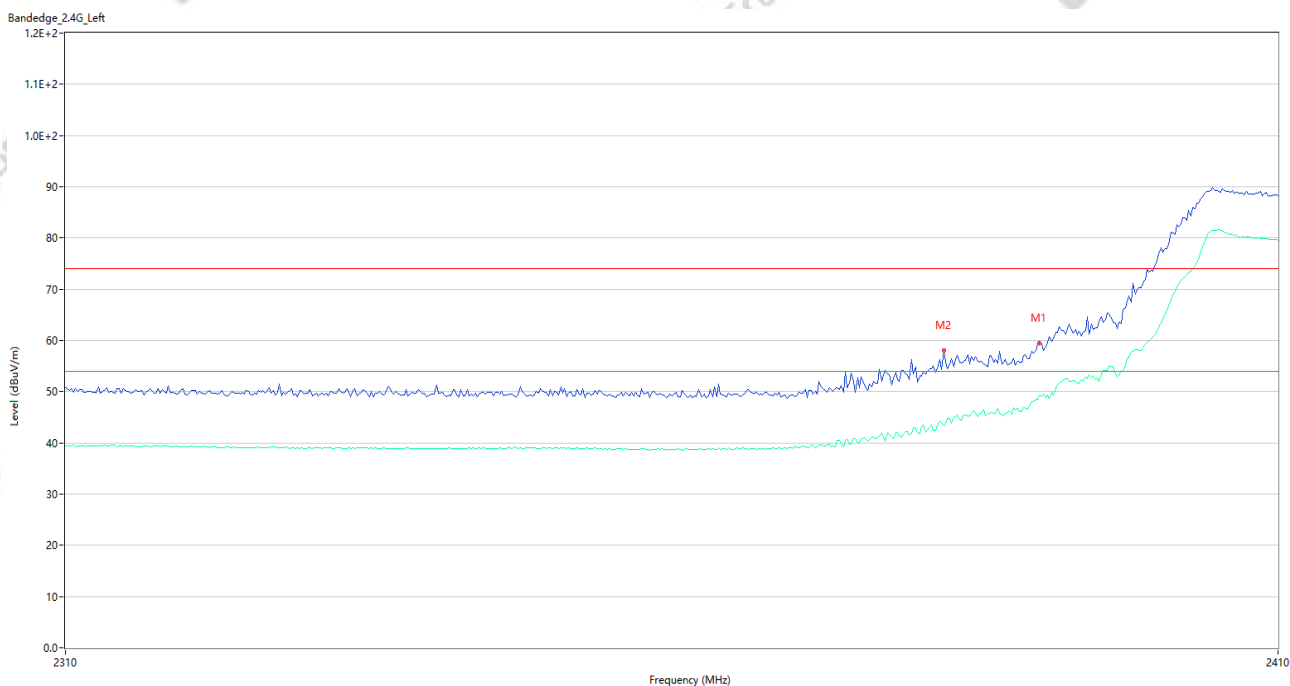
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n40 CH3 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	59.41	-3.58	74.0	14.59	Peak	57.00	150	Vertical	Pass
1**	2390.000	49.10	-3.58	54.0	4.90	AV	57.00	150	Vertical	Pass
2	2382.000	57.99	-3.85	74.0	16.01	Peak	47.00	150	Vertical	Pass
2**	2382.000	43.23	-3.85	54.0	10.77	AV	47.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.47.49

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

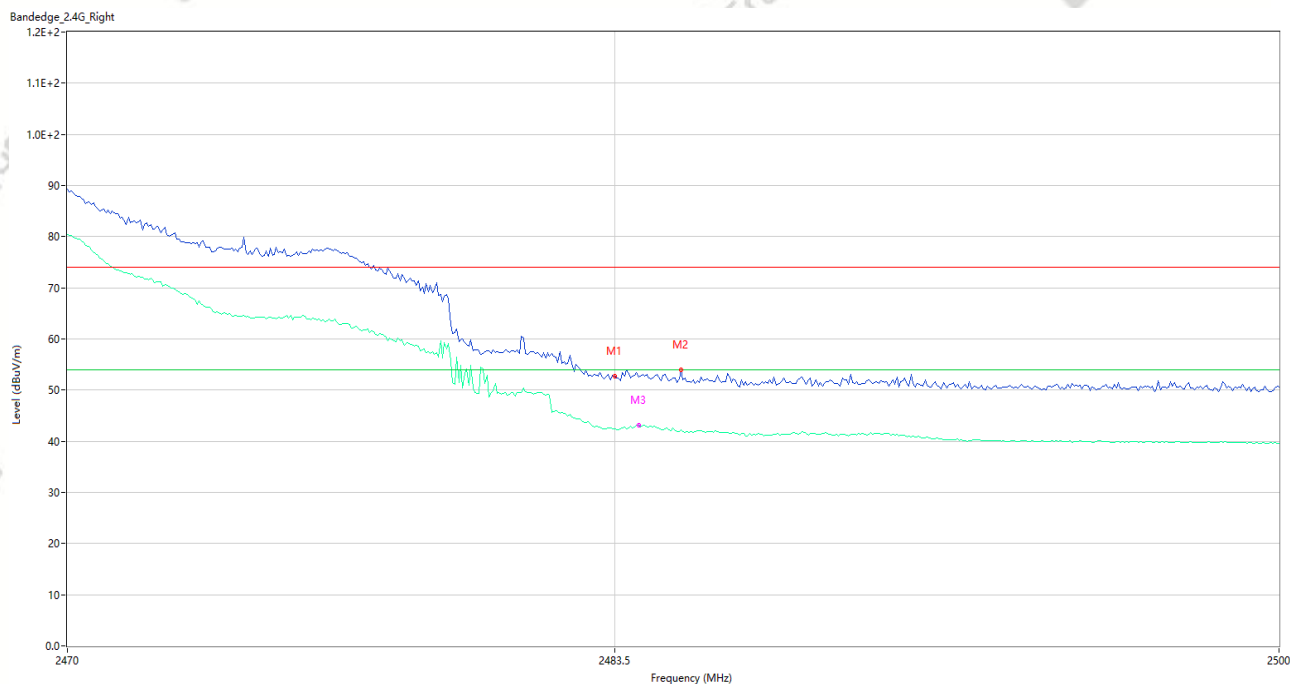
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n40 CH9 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.72	-2.55	74.0	21.28	Peak	354.00	150	Vertical	Pass
1**	2483.500	42.47	-2.55	54.0	11.53	AV	354.00	150	Vertical	Pass
2	2485.150	54.00	-2.53	74.0	20.00	Peak	67.00	150	Vertical	Pass
2**	2485.150	42.29	-2.53	54.0	11.71	AV	67.00	150	Vertical	Pass
3	2484.100	52.59	-2.54	74.0	21.41	Peak	2.00	150	Vertical	Pass
3**	2484.100	43.06	-2.54	54.0	10.94	AV	2.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_11.50.18

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

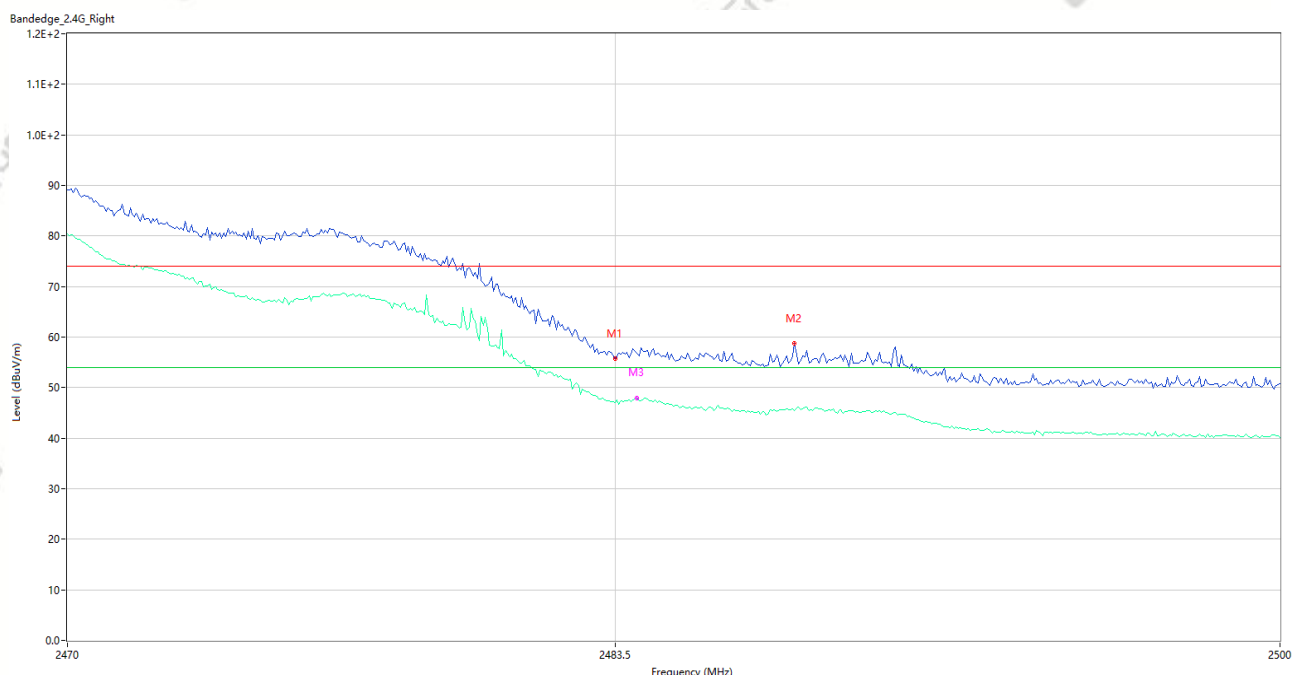
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11n40 CH9 P=17.5

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	55.67	-2.55	74.0	18.33	Peak	42.00	150	Horizontal	Pass
1**	2483.500	47.11	-2.55	54.0	6.89	AV	42.00	150	Horizontal	Pass
2	2487.950	58.68	-2.48	74.0	15.32	Peak	51.00	150	Horizontal	Pass
2**	2487.950	58.50	-2.48	54.0	8.50	AV	51.00	150	Horizontal	Pass
3	2484.050	56.88	-2.54	74.0	17.12	Peak	49.00	150	Horizontal	Pass
3**	2484.050	48.00	-2.54	54.0	6.00	AV	49.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_13.21.08

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

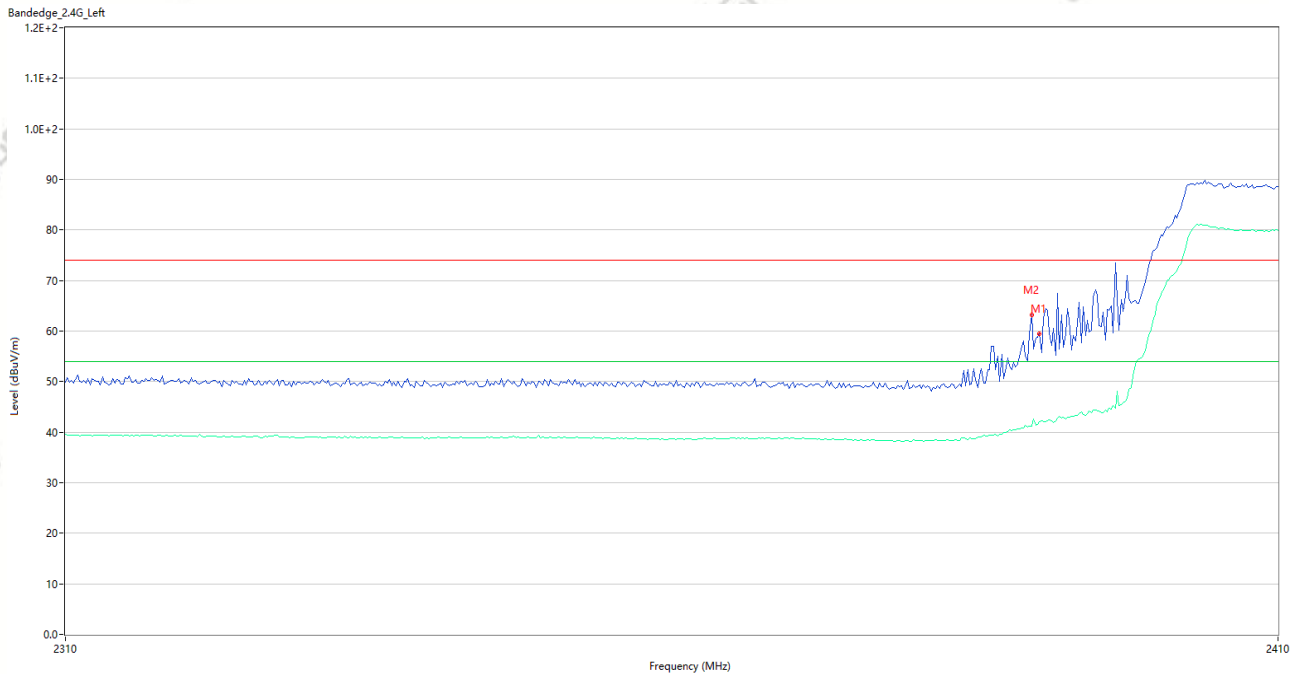
Test Site: 966#1

Test Mode: 2.4G WIFI 11ax20 CH1 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58

ANT2



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	59.43	-3.58	74.0	14.57	Peak	338.00	150	Vertical	Pass
1**	2390.000	42.09	-3.58	54.0	11.91	AV	338.00	150	Vertical	Pass
2	2389.333	63.27	-3.60	74.0	10.73	Peak	64.00	150	Vertical	Pass
2**	2389.333	41.23	-3.60	54.0	12.77	AV	64.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_13.18.58

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

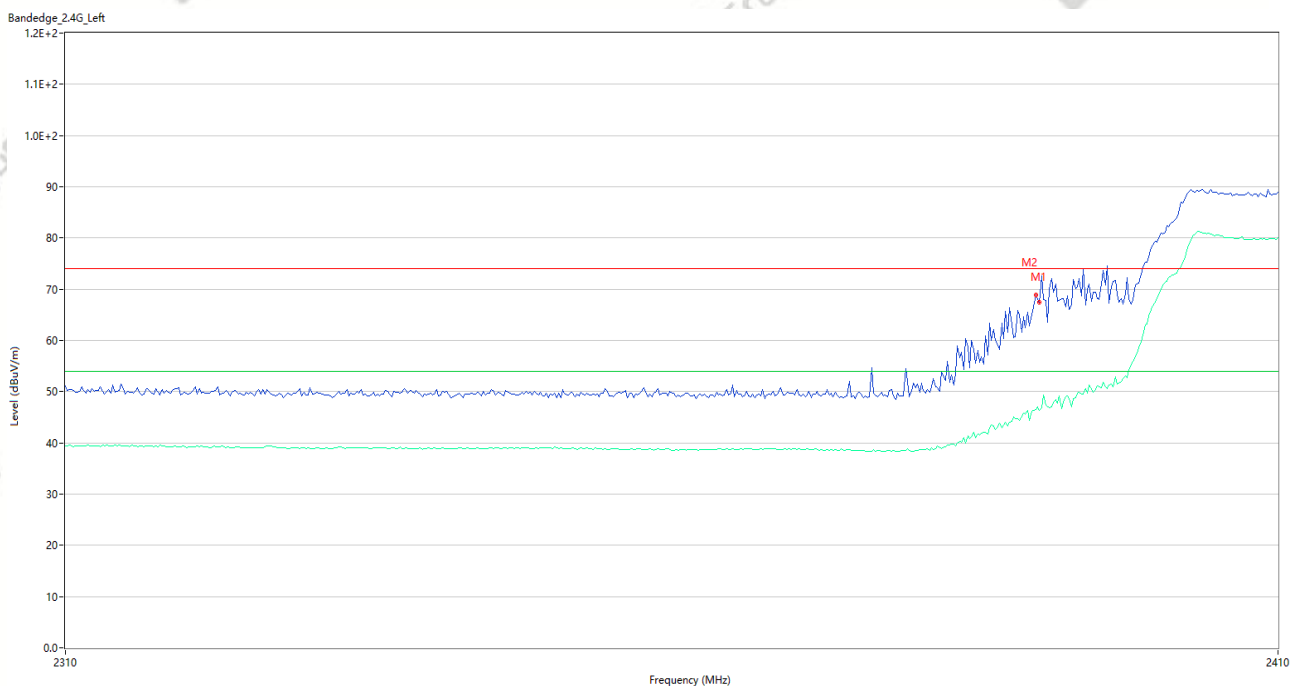
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax20 CH1 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	67.46	-3.58	74.0	6.54	Peak	17.99	150	Horizontal	Pass
1**	2390.000	46.24	-3.58	54.0	7.76	AV	17.99	150	Horizontal	Pass
2	2389.667	68.87	-3.59	74.0	5.13	Peak	0.00	150	Horizontal	Pass
2**	2389.667	46.48	-3.59	54.0	7.52	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_13.06.55

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

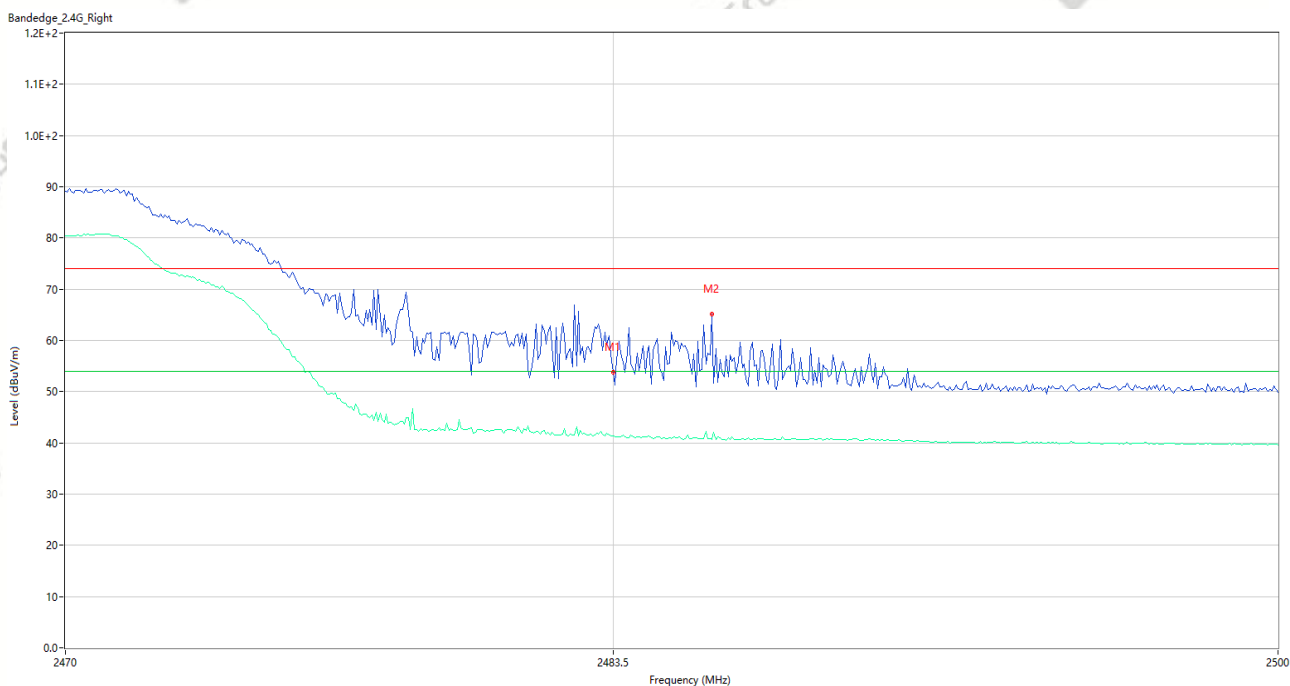
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax20 CH11 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.81	-2.55	74.0	20.19	Peak	312.00	150	Vertical	Pass
1**	2483.500	41.33	-2.55	54.0	12.67	AV	312.00	150	Vertical	Pass
2	2485.950	65.08	-2.51	74.0	8.92	Peak	33.00	150	Vertical	Pass
2**	2485.950	40.72	-2.51	54.0	13.28	AV	33.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_13.13.24

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

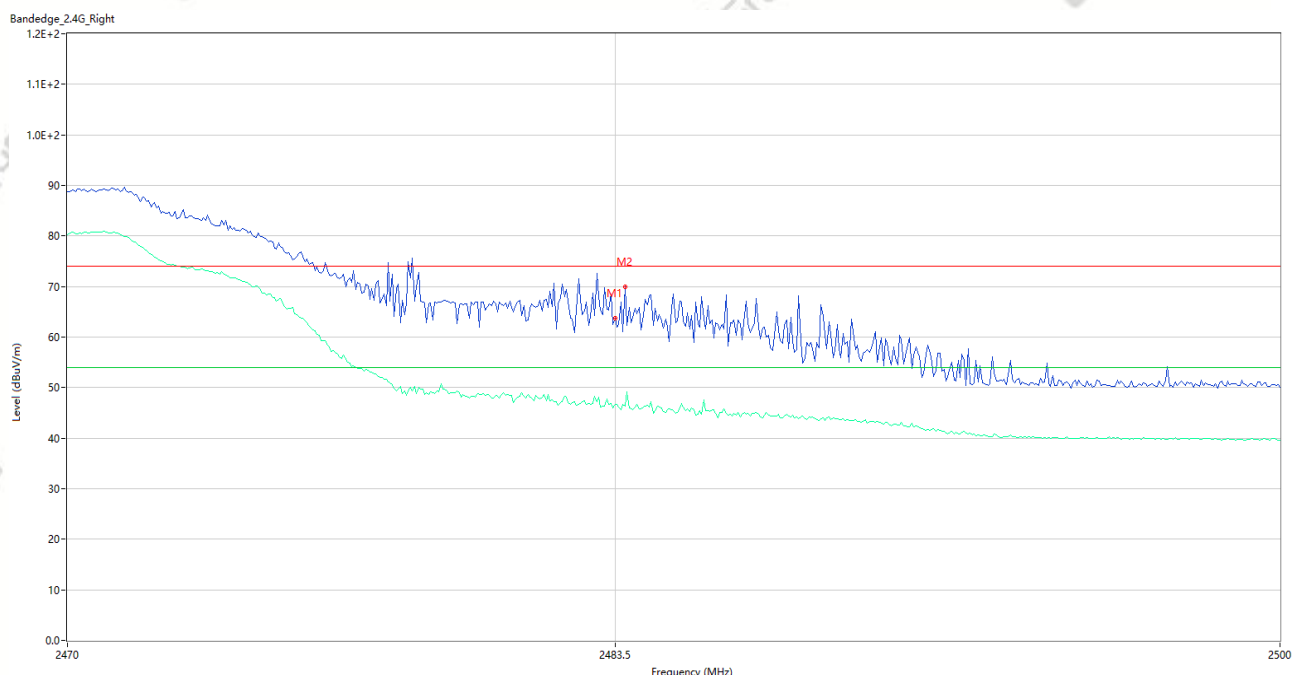
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax20 CH11 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

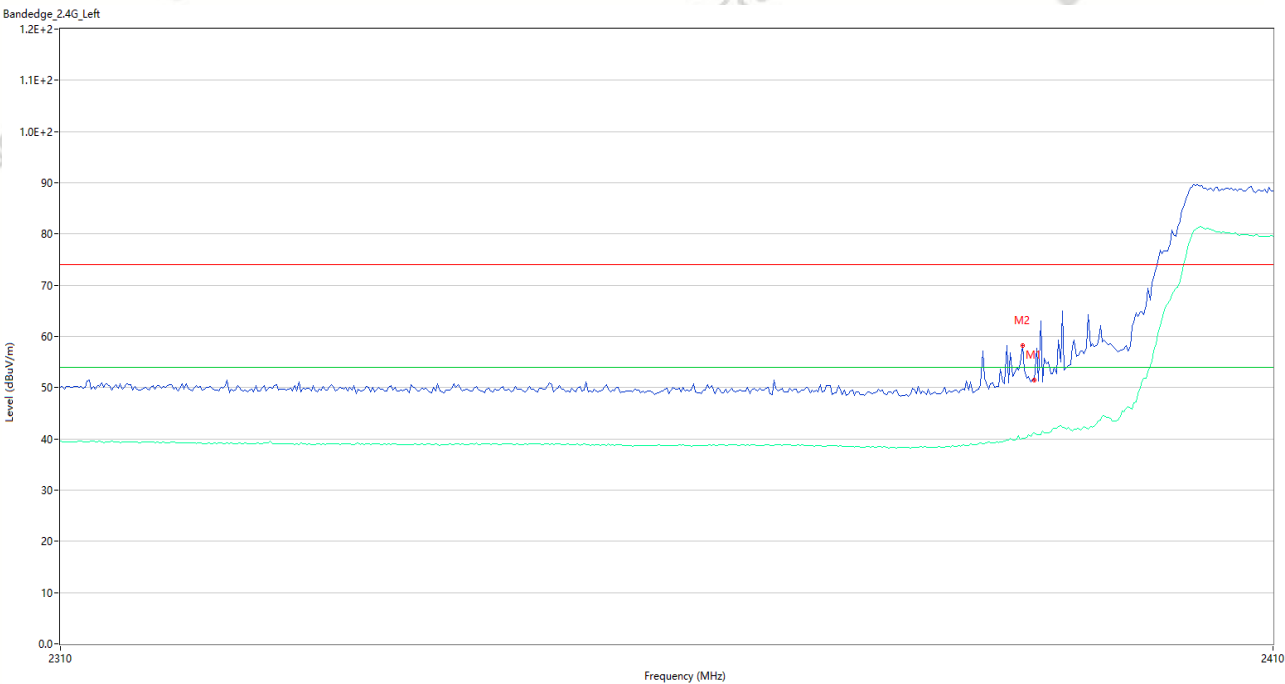
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	63.73	-2.55	74.0	10.27	Peak	232.00	150	Horizontal	Pass
1**	2483.500	46.68	-2.55	54.0	7.32	AV	232.00	150	Horizontal	Pass
2	2483.750	69.92	-2.55	74.0	4.08	Peak	55.00	150	Horizontal	Pass
2**	2483.750	46.30	-2.55	54.0	7.70	AV	55.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.53.20

EUT Name:	Mobile Computer	Temp.(°C):	23
Model Number:	RS20	Humidity (%RH):	58
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Test Voltage:	AC 120V/60Hz
Test Site:	966#1	Test Mode:	2.4G WIFI 11ax40 CH3 P=15
Test Engineer:	Zhang Siyuan	Remark:	适配器: A11+数据线: A58 ANT2



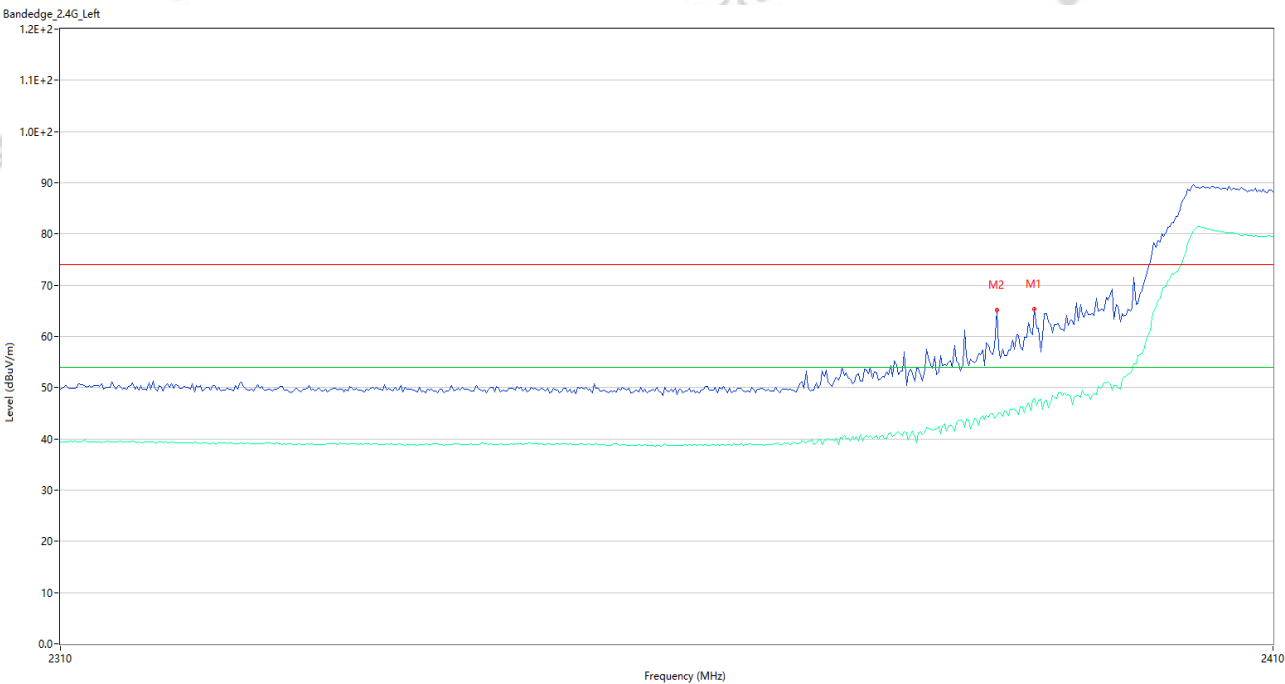
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.58	-3.58	74.0	22.55	Peak	4.02	150	Vertical	Pass
1**	2390.000	41.13	-3.58	54.0	12.87	AV	4.02	150	Vertical	Pass
2	2389.000	58.21	-3.61	74.0	15.79	Peak	43.00	150	Vertical	Pass
2**	2389.000	40.11	-3.61	54.0	13.89	AV	43.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_12.56.27

EUT Name:	Mobile Computer	Temp.(°C):	23
Model Number:	RS20	Humidity (%RH):	58
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Test Voltage:	AC 120V/60Hz
Test Site:	966#1	Test Mode:	2.4G WIFI 11ax40 CH3 P=15
Test Engineer:	Zhang Siyuan	Remark:	适配器: A11+数据线: A58 ANT2



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	65.34	-3.58	74.0	8.66	Peak	359.76	150	Horizontal	Pass
1**	2390.000	47.86	-3.58	54.0	6.14	AV	359.76	150	Horizontal	Pass
2	2386.833	65.13	-3.69	74.0	8.87	Peak	34.00	150	Horizontal	Pass
2**	2386.833	44.50	-3.69	54.0	9.50	AV	34.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_13.02.49

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

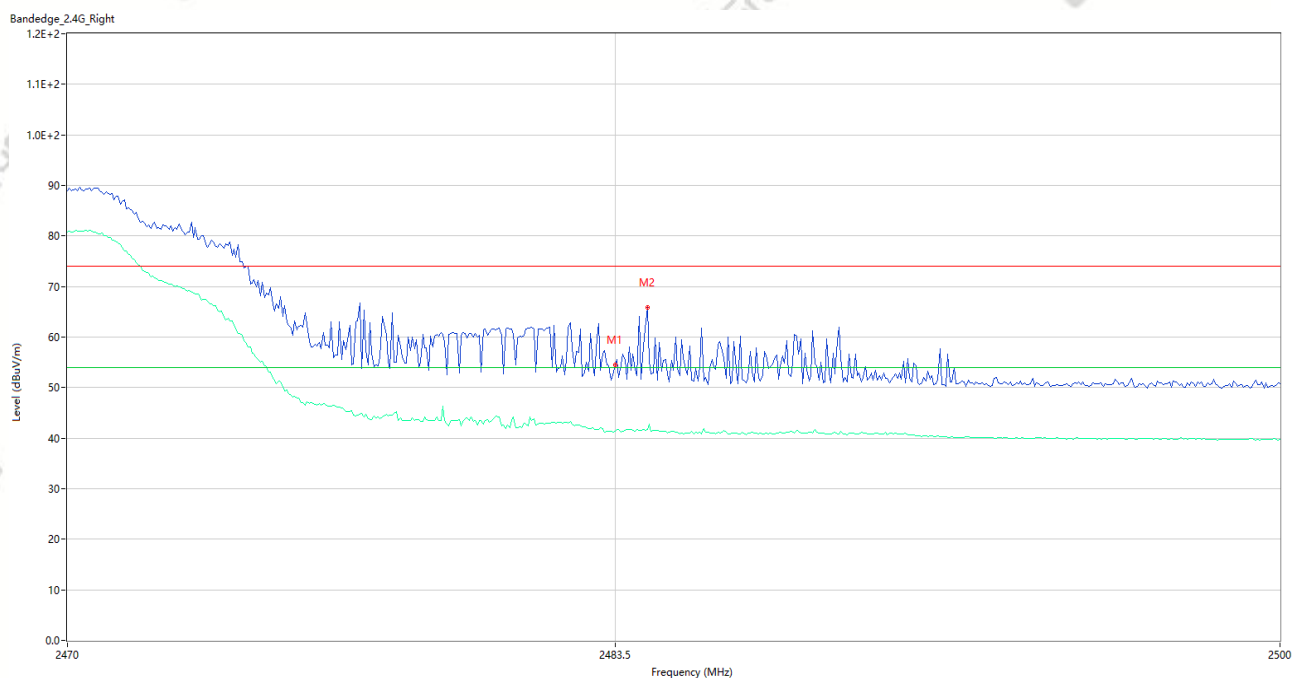
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax40 CH9 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.49	-2.55	74.0	19.51	Peak	360.00	150	Vertical	Pass
1**	2483.500	41.38	-2.55	54.0	12.62	AV	360.00	150	Vertical	Pass
2	2484.300	65.90	-2.54	74.0	8.10	Peak	74.00	150	Vertical	Pass
2**	2484.300	41.80	-2.54	54.0	12.20	AV	74.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-19_13.00.23

EUT Name: Mobile Computer

Temp.(°C): 23

Model Number: RS20

Humidity (%RH): 58

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

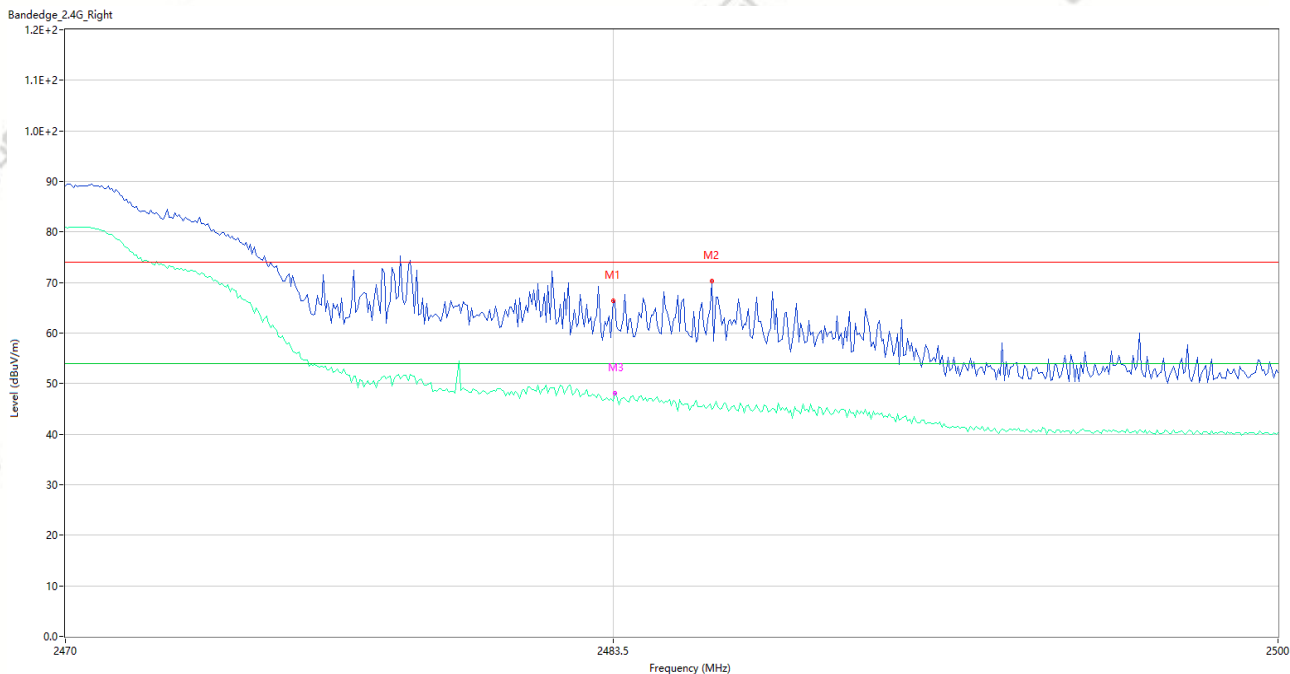
Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: 2.4G WIFI 11ax40 CH9 P=15

Test Engineer: Zhang Siyuan

Remark: 适配器: A11+数据线: A58
ANT2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	66.44	-2.55	74.0	7.56	Peak	43.00	150	Horizontal	Pass
1**	2483.500	46.48	-2.55	54.0	7.52	AV	43.00	150	Horizontal	Pass
2	2485.950	70.38	-2.51	74.0	3.62	Peak	337.00	150	Horizontal	Pass
2**	2485.950	44.82	-2.51	54.0	9.18	AV	337.00	150	Horizontal	Pass
3	2483.550	66.03	-2.55	74.0	7.97	Peak	38.00	150	Horizontal	Pass
3**	2483.550	48.06	-2.55	54.0	5.94	AV	38.00	150	Horizontal	Pass