

Main Antenna

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_10.49.46

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz

Test Site: 966#1


Test Mode: 5.2G WIFI 11a CH44 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45

ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

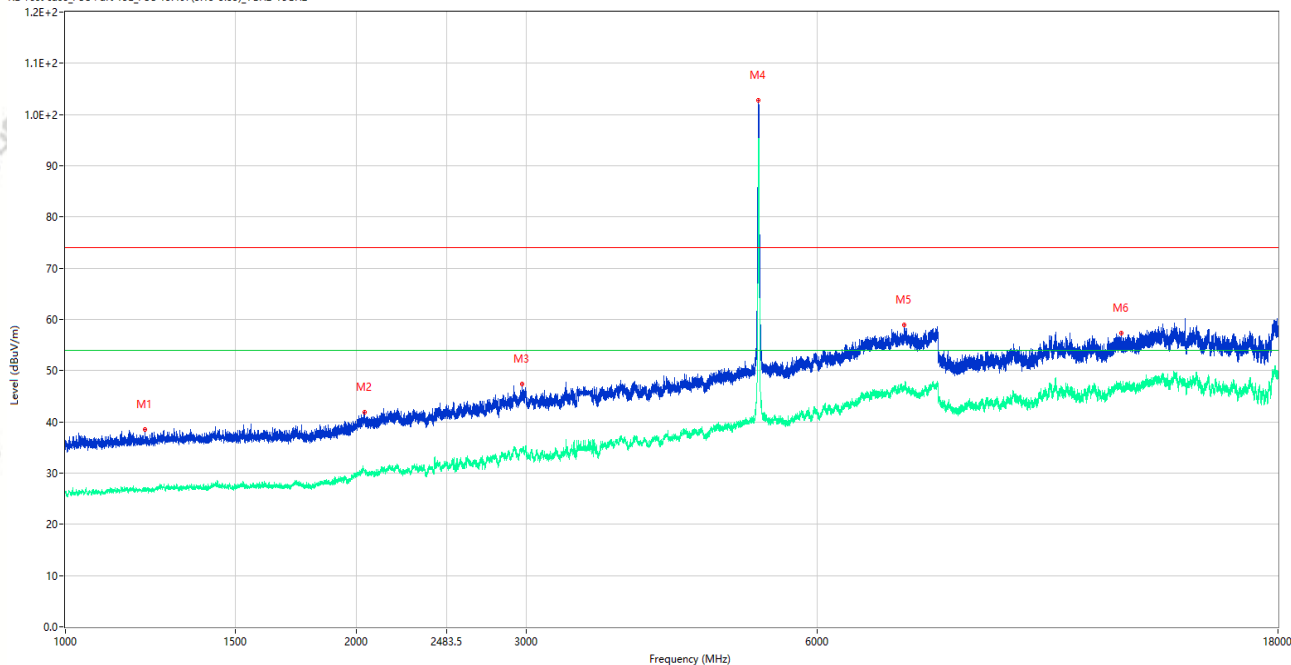

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1209.250	38.44	-16.48	74.0	35.56	Peak	204.00	150	Vertical	Pass
1**	1209.250	26.45	-16.48	54.0	27.55	AV	204.00	150	Vertical	Pass
2	2038.750	41.84	-12.99	74.0	32.16	Peak	360.00	150	Vertical	Pass
2**	2038.750	30.44	-12.99	54.0	23.56	AV	360.00	150	Vertical	Pass
3	2970.500	47.44	-6.17	74.0	26.56	Peak	244.00	150	Vertical	Pass
3**	2970.500	34.11	-6.17	54.0	19.89	AV	244.00	150	Vertical	Pass
4	5219.000	102.76	-0.24	74.0	-28.76	Peak	309.00	150	Vertical	N/A
4**	5219.000	94.88	-0.24	54.0	-40.88	AV	309.00	150	Vertical	N/A
5	7389.000	58.95	5.97	74.0	15.05	Peak	45.00	150	Vertical	Pass
5**	7389.000	46.53	5.97	54.0	7.47	AV	45.00	150	Vertical	Pass
6	12380.500	57.40	5.13	74.0	16.60	Peak	185.00	150	Vertical	Pass
6**	12380.500	46.95	5.13	54.0	7.05	AV	185.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_10.57.51

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11a CH44 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

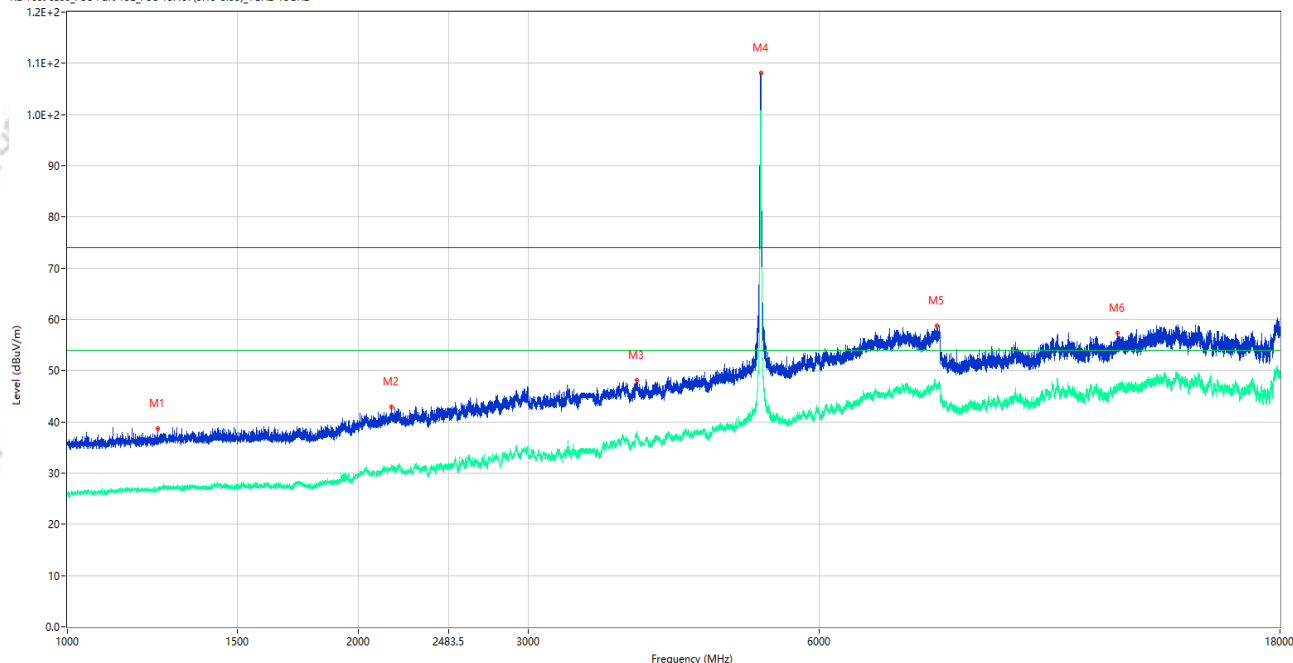

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1239.250	38.72	-16.59	74.0	35.28	Peak	159.00	150	Horizontal	Pass
1**	1239.250	26.99	-16.59	54.0	27.01	AV	159.00	150	Horizontal	Pass
2	2163.750	43.02	-12.63	74.0	30.98	Peak	85.00	150	Horizontal	Pass
2**	2163.750	31.55	-12.63	54.0	22.45	AV	85.00	150	Horizontal	Pass
3	3883.000	48.19	-2.74	74.0	25.81	Peak	243.00	150	Horizontal	Pass
3**	3883.000	38.10	-2.74	54.0	15.90	AV	243.00	150	Horizontal	Pass
4	5221.500	108.17	-0.32	74.0	-34.17	Peak	239.00	150	Horizontal	N/A
4**	5221.500	100.66	-0.32	54.0	-46.66	AV	239.00	150	Horizontal	N/A
5	7946.500	58.68	6.78	74.0	15.32	Peak	111.00	150	Horizontal	Pass
5**	7946.500	46.38	6.78	54.0	7.62	AV	111.00	150	Horizontal	Pass
6	12231.999	57.29	5.36	74.0	16.71	Peak	358.00	150	Horizontal	Pass
6**	12231.999	47.24	5.36	54.0	6.76	AV	358.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_11.28.47

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11n20 CH44 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

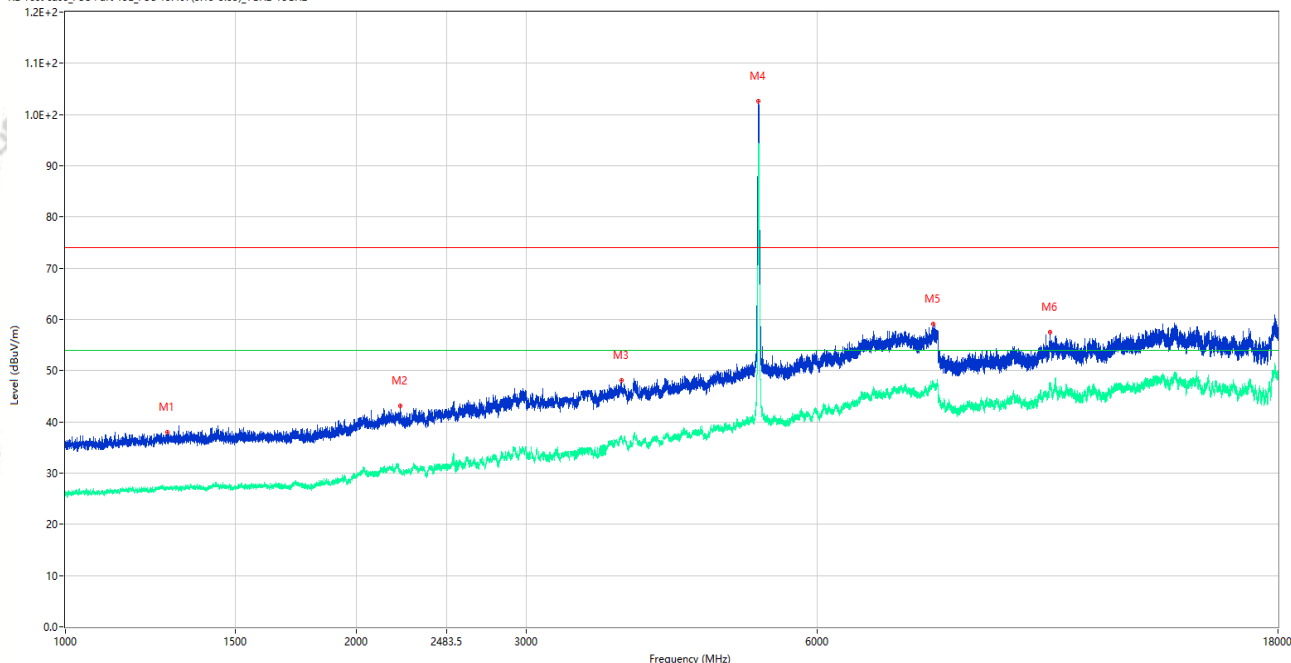

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1274.500	38.05	-16.38	74.0	35.95	Peak	360.00	150	Vertical	Pass
1**	1274.500	27.10	-16.38	54.0	26.90	AV	360.00	150	Vertical	Pass
2	2220.750	43.15	-12.23	74.0	30.85	Peak	53.00	150	Vertical	Pass
2**	2220.750	30.59	-12.23	54.0	23.41	AV	53.00	150	Vertical	Pass
3	3761.000	48.14	-2.99	74.0	25.86	Peak	1.00	150	Vertical	Pass
3**	3761.000	36.94	-2.99	54.0	17.06	AV	1.00	150	Vertical	Pass
4	5219.000	102.54	-0.24	74.0	-28.54	Peak	313.00	150	Vertical	N/A
4**	5219.000	94.20	-0.24	54.0	-40.20	AV	313.00	150	Vertical	N/A
5	7916.500	59.03	6.89	74.0	14.97	Peak	36.00	150	Vertical	Pass
5**	7916.500	47.16	6.89	54.0	6.84	AV	36.00	150	Vertical	Pass
6	10449.500	57.48	3.82	74.0	16.52	Peak	206.00	150	Vertical	Pass
6**	10449.500	46.45	3.82	54.0	7.55	AV	206.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_11.34.25

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11n20 CH44 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

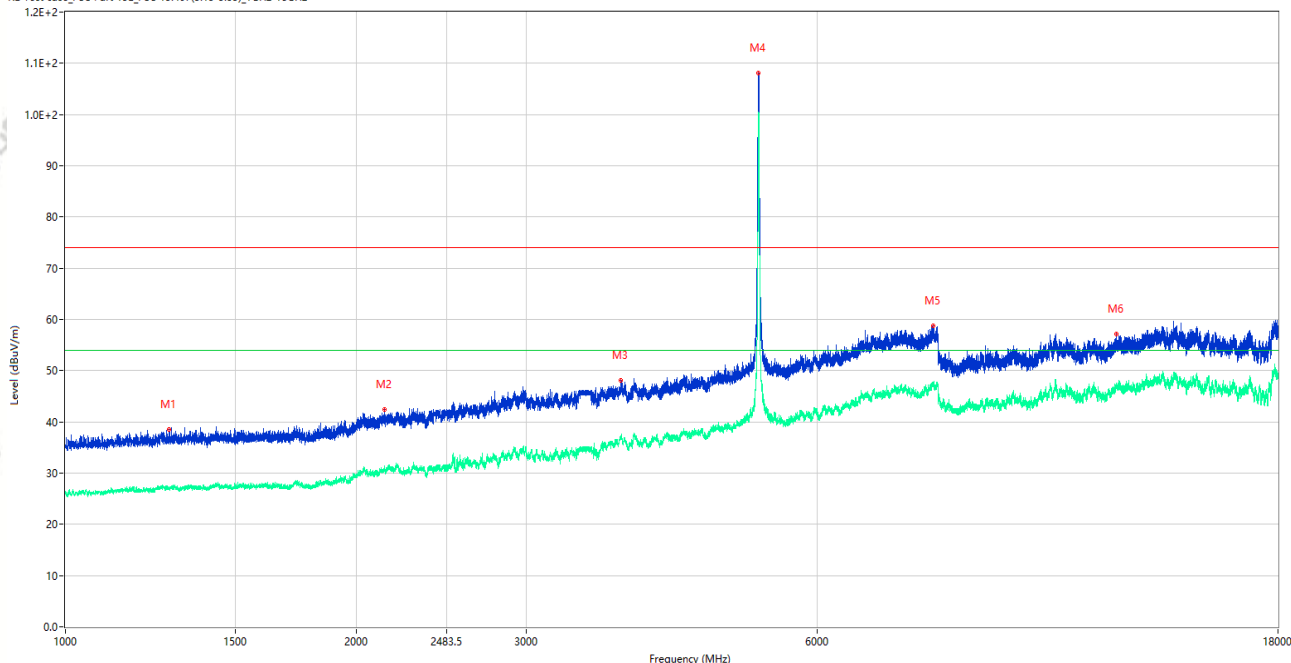

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1280.000	38.43	-16.45	74.0	35.57	Peak	157.00	150	Horizontal	Pass
1**	1280.000	27.02	-16.45	54.0	26.98	AV	157.00	150	Horizontal	Pass
2	2141.250	42.45	-12.77	74.0	31.55	Peak	265.00	150	Horizontal	Pass
2**	2141.250	30.77	-12.77	54.0	23.23	AV	265.00	150	Horizontal	Pass
3	3760.500	48.12	-2.97	74.0	25.88	Peak	360.00	150	Horizontal	Pass
3**	3760.500	36.79	-2.97	54.0	17.21	AV	360.00	150	Horizontal	Pass
4	5218.500	108.10	-0.23	74.0	-34.10	Peak	243.00	150	Horizontal	N/A
4**	5218.500	100.38	-0.23	54.0	-46.38	AV	243.00	150	Horizontal	N/A
5	7915.500	58.79	6.89	74.0	15.21	Peak	55.00	150	Horizontal	Pass
5**	7915.500	47.24	6.89	54.0	6.76	AV	55.00	150	Horizontal	Pass
6	12235.000	57.15	5.32	74.0	16.85	Peak	102.00	150	Horizontal	Pass
6**	12235.000	46.99	5.32	54.0	7.01	AV	102.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_15.48.17

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11n40 CH38 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

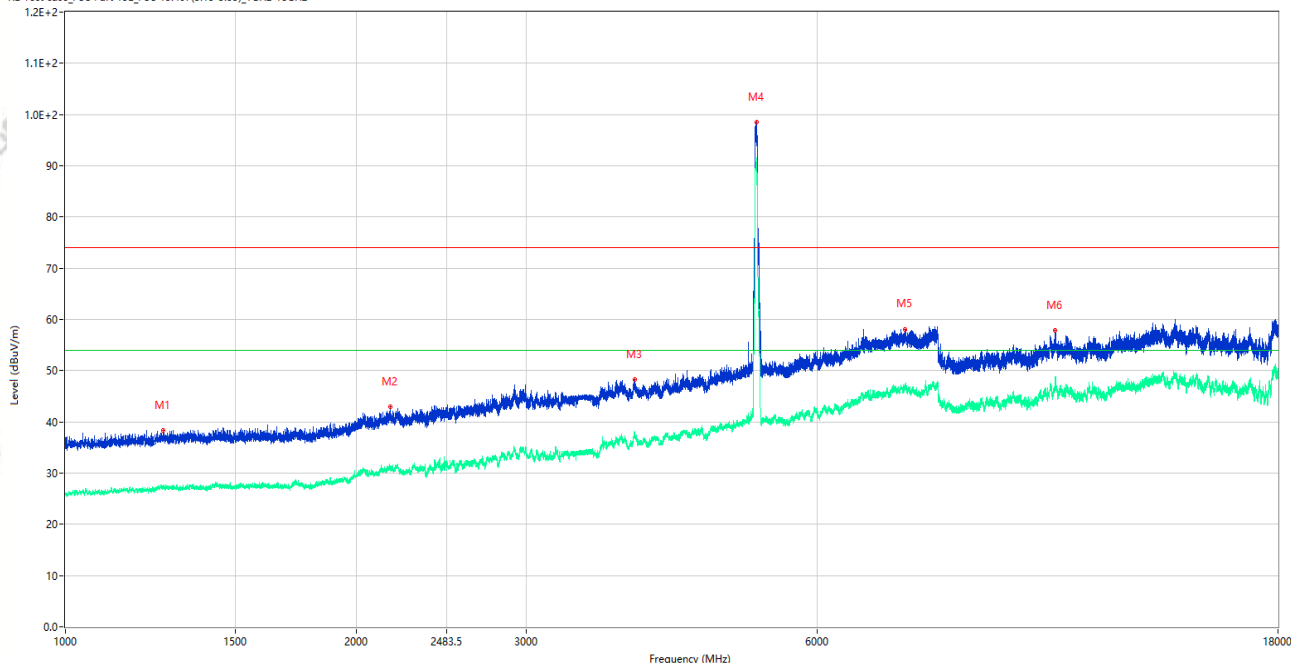

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1263.000	38.38	-16.24	74.0	35.62	Peak	161.00	150	Vertical	Pass
1**	1263.000	26.98	-16.24	54.0	27.02	AV	161.00	150	Vertical	Pass
2	2169.500	42.96	-12.46	74.0	31.04	Peak	86.00	150	Vertical	Pass
2**	2169.500	30.65	-12.46	54.0	23.35	AV	86.00	150	Vertical	Pass
3	3882.500	48.29	-2.71	74.0	25.71	Peak	360.00	150	Vertical	Pass
3**	3882.500	38.21	-2.71	54.0	15.79	AV	360.00	150	Vertical	Pass
4	5194.500	98.54	-0.19	74.0	-24.54	Peak	332.00	150	Vertical	N/A
4**	5194.500	90.71	-0.19	54.0	-36.71	AV	332.00	150	Vertical	N/A
5	7405.500	57.96	6.46	74.0	16.04	Peak	51.00	150	Vertical	Pass
5**	7405.500	46.64	6.46	54.0	7.36	AV	51.00	150	Vertical	Pass
6	10587.000	57.79	4.94	74.0	16.21	Peak	81.00	150	Vertical	Pass
6**	10587.000	47.97	4.94	54.0	6.03	AV	81.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_15.53.54

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11n40 CH38 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

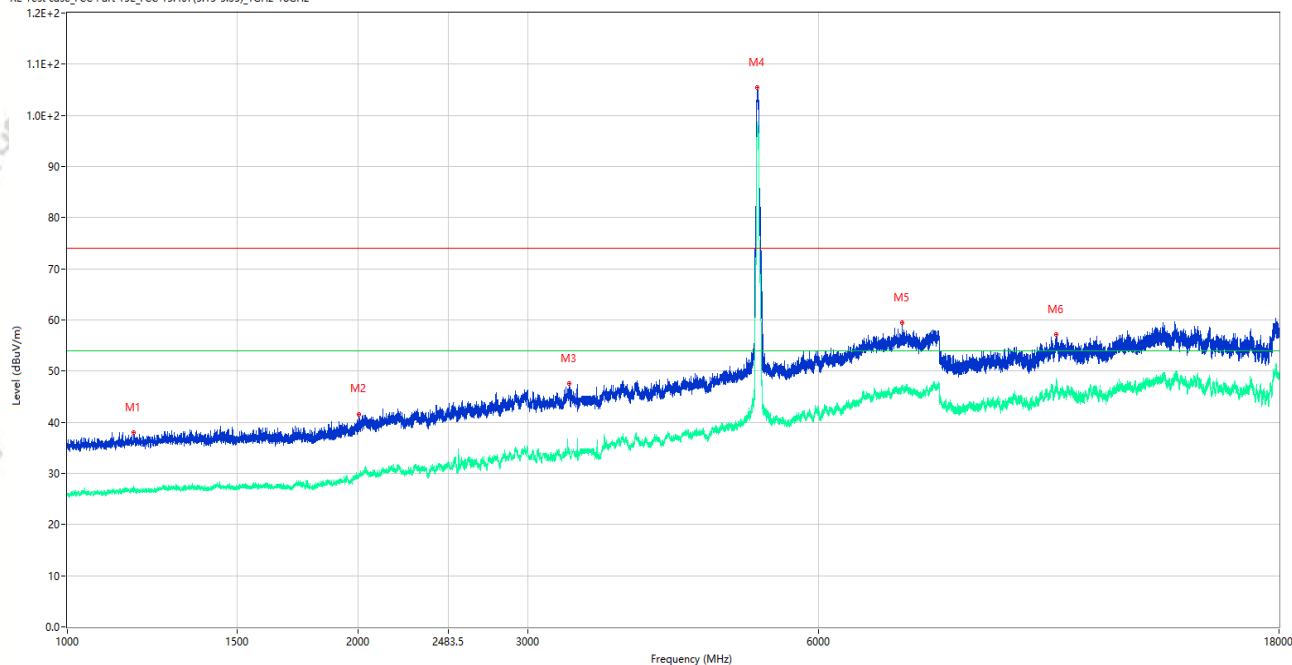

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1172.250	37.97	-16.43	74.0	36.03	Peak	127.00	150	Horizontal	Pass
1**	1172.250	26.71	-16.43	54.0	27.29	AV	127.00	150	Horizontal	Pass
2	2006.000	41.58	-14.06	74.0	32.42	Peak	65.00	150	Horizontal	Pass
2**	2006.000	29.93	-14.06	54.0	24.07	AV	65.00	150	Horizontal	Pass
3	3308.500	47.56	-6.47	74.0	26.44	Peak	82.00	150	Horizontal	Pass
3**	3308.500	33.79	-6.47	54.0	20.21	AV	82.00	150	Horizontal	Pass
4	5188.000	105.37	-0.21	74.0	-31.37	Peak	225.00	150	Horizontal	N/A
4**	5188.000	98.24	-0.21	54.0	-44.24	AV	225.00	150	Horizontal	N/A
5	7327.500	59.38	5.73	74.0	14.62	Peak	293.00	150	Horizontal	Pass
5**	7327.500	46.82	5.73	54.0	7.18	AV	293.00	150	Horizontal	Pass
6	10582.000	57.11	4.74	74.0	16.89	Peak	208.00	150	Horizontal	Pass
6**	10582.000	47.53	4.74	54.0	6.47	AV	208.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_15.59.31

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11ac80 CH42 P=16

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

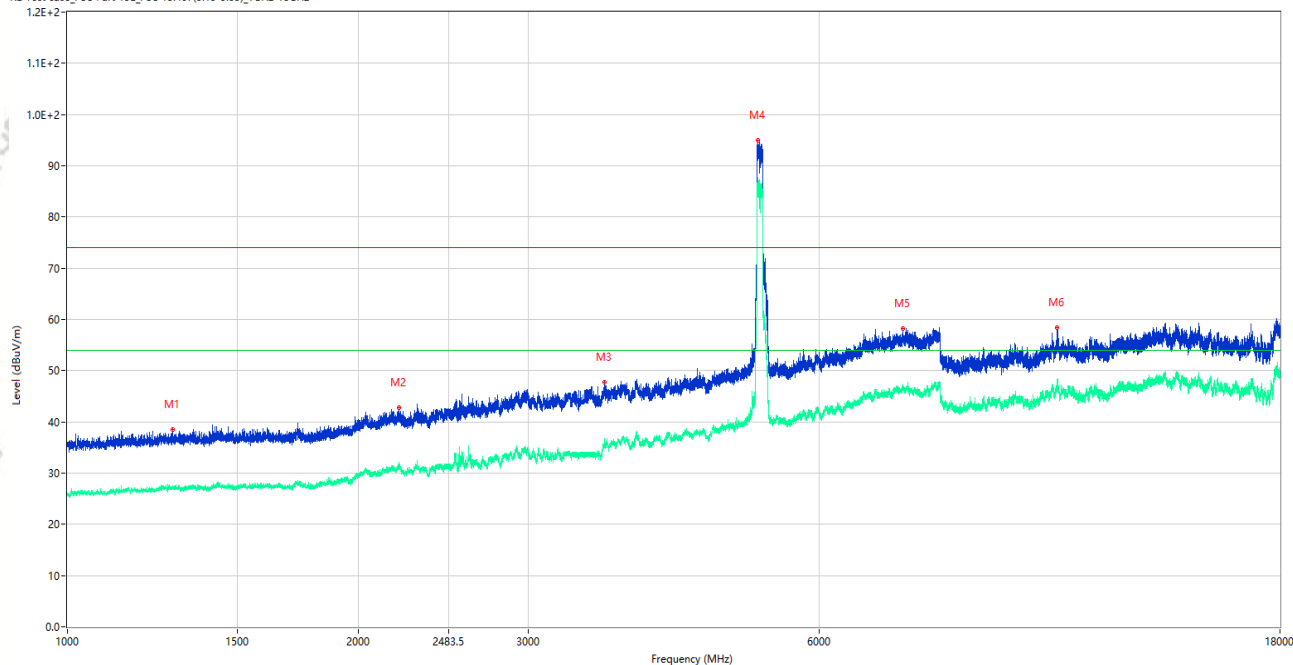

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.750	38.47	-16.44	74.0	35.53	Peak	240.00	150	Vertical	Pass
1**	1284.750	27.06	-16.44	54.0	26.94	AV	240.00	150	Vertical	Pass
2	2204.750	42.86	-12.28	74.0	31.14	Peak	50.00	150	Vertical	Pass
2**	2204.750	30.77	-12.28	54.0	23.23	AV	50.00	150	Vertical	Pass
3	3599.500	47.71	-4.68	74.0	26.29	Peak	252.00	150	Vertical	Pass
3**	3599.500	35.20	-4.68	54.0	18.80	AV	252.00	150	Vertical	Pass
4	5185.500	94.98	-0.23	74.0	-20.98	Peak	332.00	150	Vertical	N/A
4**	5185.500	87.16	-0.23	54.0	-33.16	AV	332.00	150	Vertical	N/A
5	7328.500	58.20	5.72	74.0	15.80	Peak	177.00	150	Vertical	Pass
5**	7328.500	46.64	5.72	54.0	7.36	AV	177.00	150	Vertical	Pass
6	10589.500	58.35	5.03	74.0	15.65	Peak	250.00	150	Vertical	Pass
6**	10589.500	48.03	5.03	54.0	5.97	AV	250.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_16.13.36

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11ac80 CH42 P=16

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

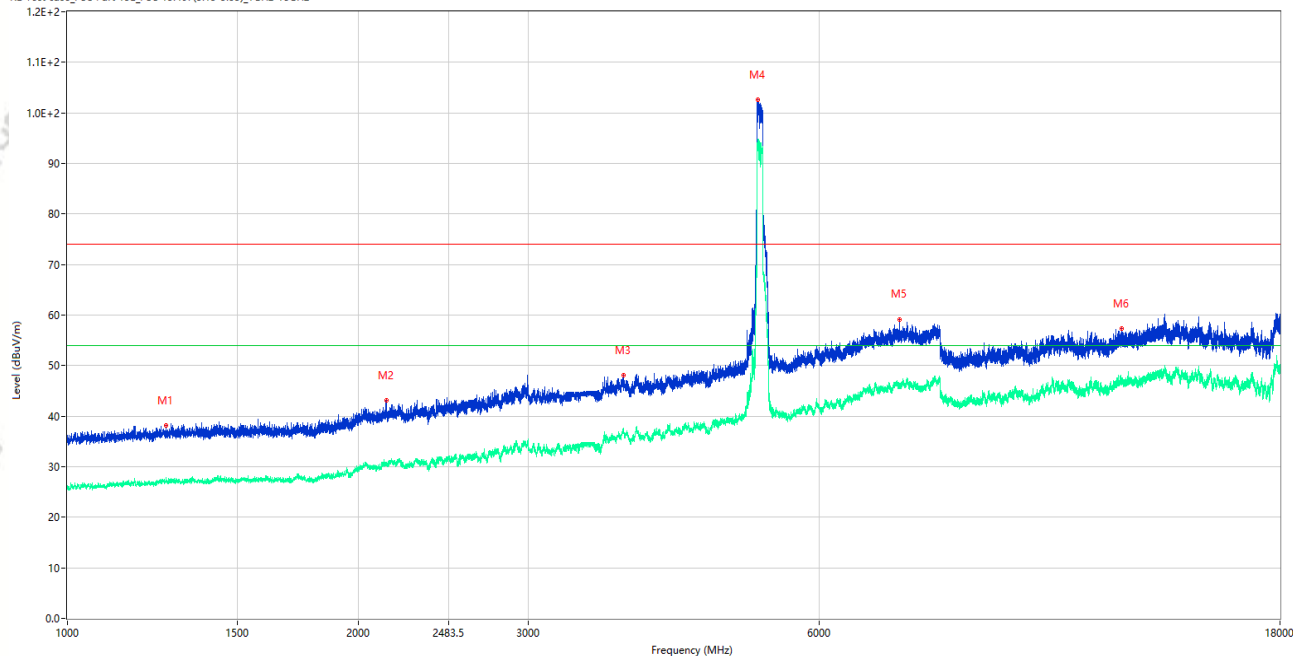

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1265.750	38.22	-16.27	74.0	35.78	Peak	291.00	150	Horizontal	Pass
1**	1265.750	27.82	-16.27	54.0	26.18	AV	291.00	150	Horizontal	Pass
2	2137.500	43.07	-12.78	74.0	30.93	Peak	165.00	150	Horizontal	Pass
2**	2137.500	30.94	-12.78	54.0	23.06	AV	165.00	150	Horizontal	Pass
3	3762.500	48.13	-3.06	74.0	25.87	Peak	125.00	150	Horizontal	Pass
3**	3762.500	36.98	-3.06	54.0	17.02	AV	125.00	150	Horizontal	Pass
4	5188.500	102.54	-0.20	74.0	-28.54	Peak	236.00	150	Horizontal	N/A
4**	5188.500	94.38	-0.20	54.0	-40.38	AV	236.00	150	Horizontal	N/A
5	7267.500	59.19	5.39	74.0	14.81	Peak	41.00	150	Horizontal	Pass
5**	7267.500	46.25	5.39	54.0	7.75	AV	41.00	150	Horizontal	Pass
6	12335.000	57.27	5.54	74.0	16.73	Peak	105.00	150	Horizontal	Pass
6**	12335.000	46.69	5.54	54.0	7.31	AV	105.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_16.23.26

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11ax20 CH44 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

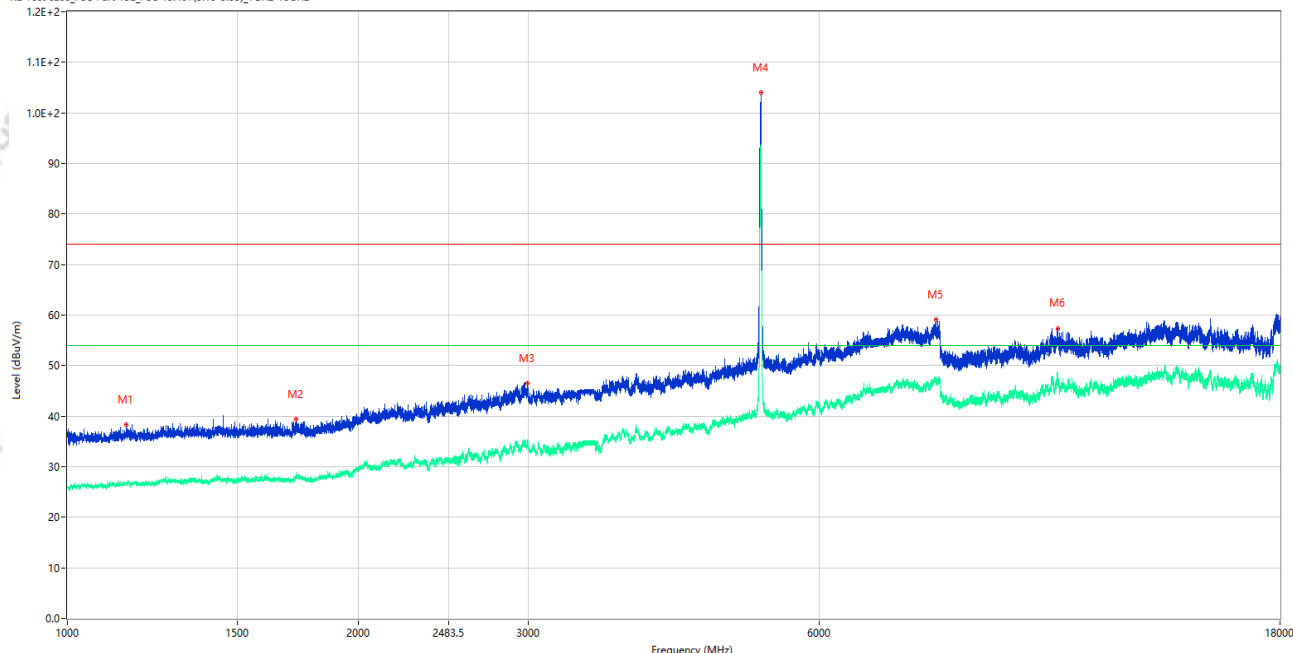

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1151.250	38.35	-16.72	74.0	35.65	Peak	358.00	150	Vertical	Pass
1**	1151.250	26.65	-16.72	54.0	27.35	AV	358.00	150	Vertical	Pass
2	1726.750	39.35	-16.04	74.0	34.65	Peak	159.00	150	Vertical	Pass
2**	1726.750	27.84	-16.04	54.0	26.16	AV	159.00	150	Vertical	Pass
3	2996.250	46.49	-6.15	74.0	27.51	Peak	251.00	150	Vertical	Pass
3**	2996.250	34.66	-6.15	54.0	19.34	AV	251.00	150	Vertical	Pass
4	5221.000	104.07	-0.30	74.0	-30.07	Peak	1.00	150	Vertical	N/A
4**	5221.000	93.47	-0.30	54.0	-39.47	AV	1.00	150	Vertical	N/A
5	7926.500	59.03	6.80	74.0	14.97	Peak	165.00	150	Vertical	Pass
5**	7926.500	47.05	6.80	54.0	6.95	AV	165.00	150	Vertical	Pass
6	10595.500	57.41	4.77	74.0	16.59	Peak	155.00	150	Vertical	Pass
6**	10595.500	47.70	4.77	54.0	6.30	AV	155.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_16.19.33

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11ax20 CH44 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

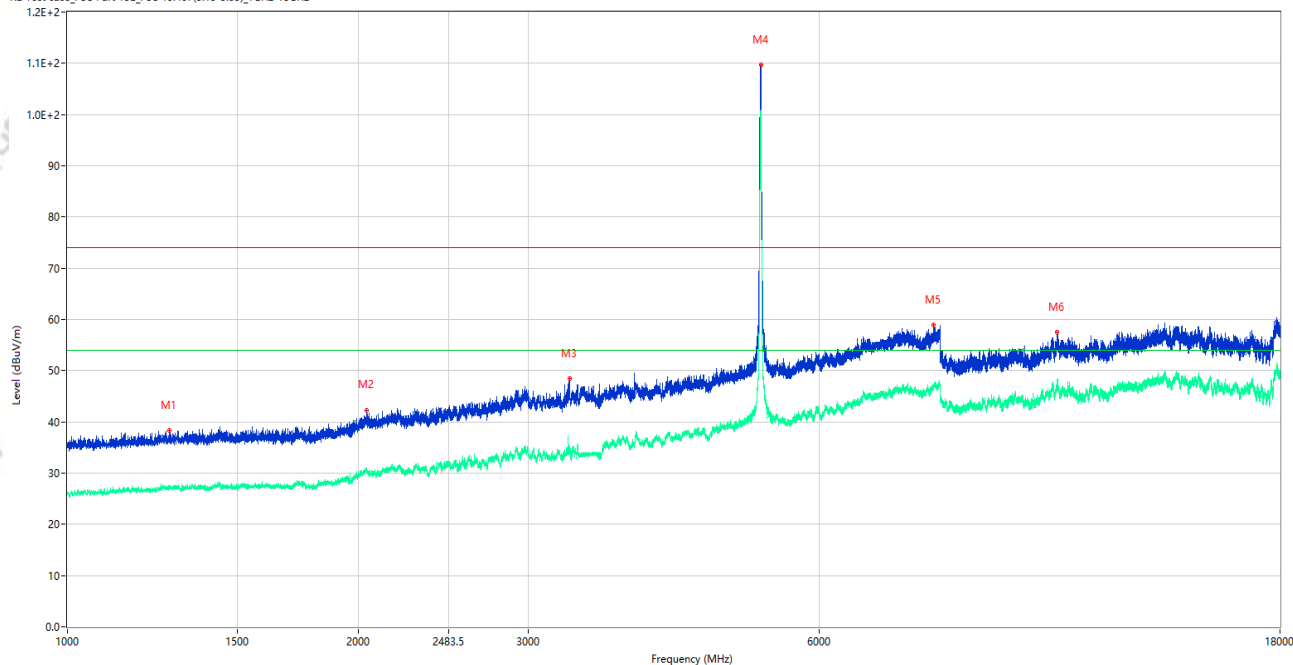

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1275.500	38.39	-16.39	74.0	35.61	Peak	47.00	150	Horizontal	Pass
1**	1275.500	27.09	-16.39	54.0	26.91	AV	47.00	150	Horizontal	Pass
2	2039.000	42.33	-12.98	74.0	31.67	Peak	244.00	150	Horizontal	Pass
2**	2039.000	30.66	-12.98	54.0	23.34	AV	244.00	150	Horizontal	Pass
3	3313.500	48.47	-6.55	74.0	25.53	Peak	158.00	150	Horizontal	Pass
3**	3313.500	34.43	-6.55	54.0	19.57	AV	158.00	150	Horizontal	Pass
4	5222.500	109.63	-0.37	74.0	-35.63	Peak	247.00	150	Horizontal	N/A
4**	5222.500	100.20	-0.37	54.0	-46.20	AV	247.00	150	Horizontal	N/A
5	7876.500	58.99	6.62	74.0	15.01	Peak	186.00	150	Horizontal	Pass
5**	7876.500	46.67	6.62	54.0	7.33	AV	186.00	150	Horizontal	Pass
6	10589.000	57.43	5.01	74.0	16.57	Peak	236.00	150	Horizontal	Pass
6**	10589.000	48.36	5.01	54.0	5.64	AV	236.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_16.30.27

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11ax40 CH46 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

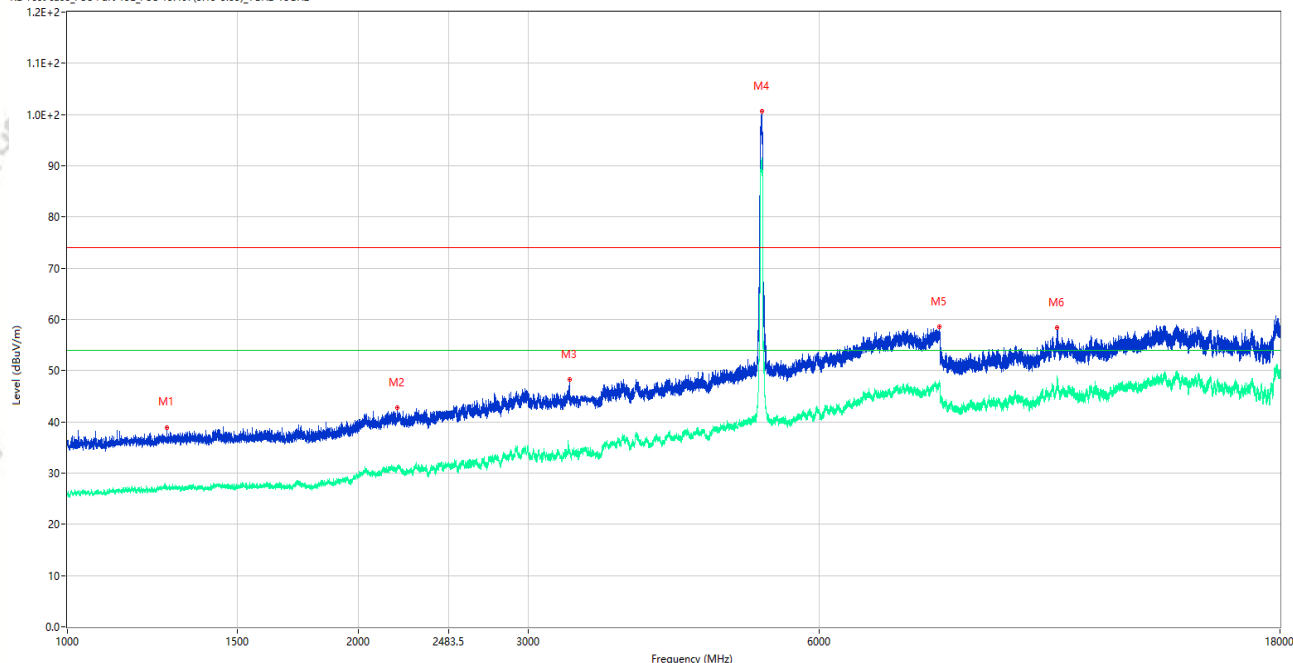

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1267.250	38.95	-16.29	74.0	35.05	Peak	16.00	150	Vertical	Pass
1**	1267.250	27.07	-16.29	54.0	26.93	AV	16.00	150	Vertical	Pass
2	2197.000	42.69	-12.60	74.0	31.31	Peak	249.00	150	Vertical	Pass
2**	2197.000	30.83	-12.60	54.0	23.17	AV	249.00	150	Vertical	Pass
3	3310.000	48.20	-6.50	74.0	25.80	Peak	137.00	150	Vertical	Pass
3**	3310.000	33.91	-6.50	54.0	20.09	AV	137.00	150	Vertical	Pass
4	5234.000	100.69	-0.77	74.0	-26.69	Peak	312.00	150	Vertical	N/A
4**	5234.000	91.62	-0.77	54.0	-37.62	AV	312.00	150	Vertical	N/A
5	7991.000	58.60	7.26	74.0	15.40	Peak	221.00	150	Vertical	Pass
5**	7991.000	47.07	7.26	54.0	6.93	AV	221.00	150	Vertical	Pass
6	10589.000	58.40	5.01	74.0	15.60	Peak	170.00	150	Vertical	Pass
6**	10589.000	48.08	5.01	54.0	5.92	AV	170.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_16.34.27

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11ax40 CH46 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

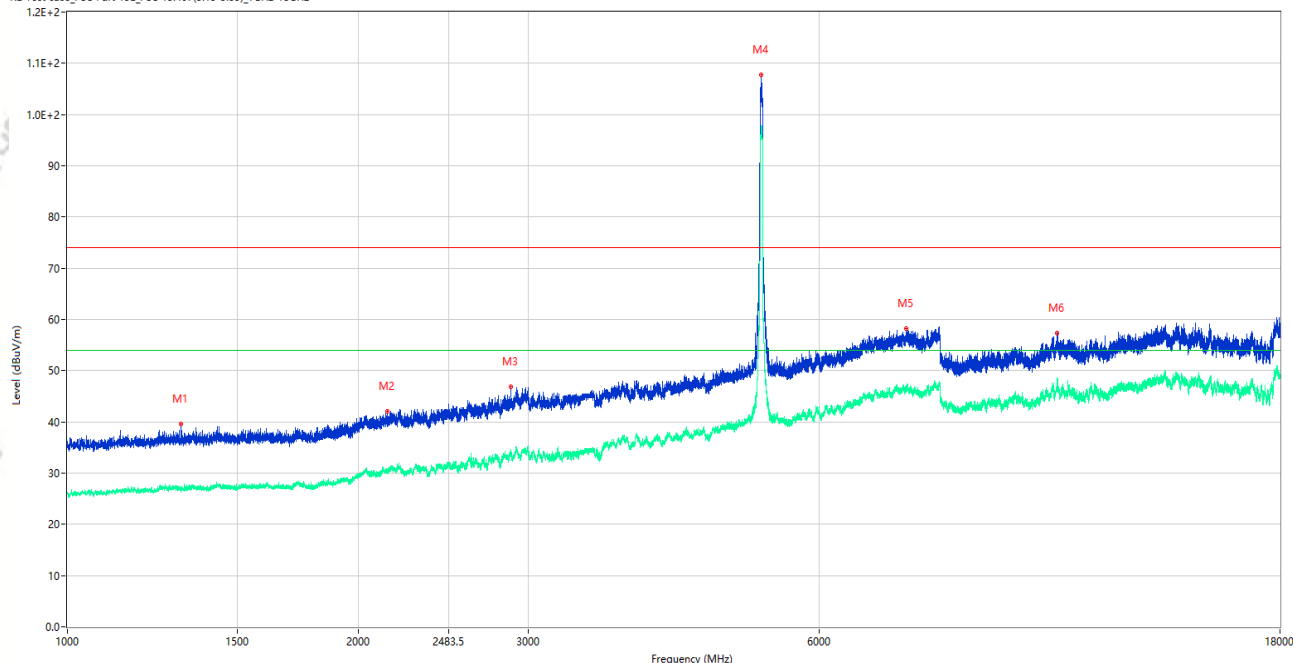

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1311.750	39.62	-16.21	74.0	34.38	Peak	213.00	150	Horizontal	Pass
1**	1311.750	26.54	-16.21	54.0	27.46	AV	213.00	150	Horizontal	Pass
2	2142.500	42.03	-12.79	74.0	31.97	Peak	339.00	150	Horizontal	Pass
2**	2142.500	30.16	-12.79	54.0	23.84	AV	339.00	150	Horizontal	Pass
3	2878.500	46.87	-7.91	74.0	27.13	Peak	129.00	150	Horizontal	Pass
3**	2878.500	33.78	-7.91	54.0	20.22	AV	129.00	150	Horizontal	Pass
4	5229.000	107.73	-0.68	74.0	-33.73	Peak	260.00	150	Horizontal	N/A
4**	5229.000	97.84	-0.68	54.0	-43.84	AV	260.00	150	Horizontal	N/A
5	7379.500	58.14	5.86	74.0	15.86	Peak	212.00	150	Horizontal	Pass
5**	7379.500	45.84	5.86	54.0	8.16	AV	212.00	150	Horizontal	Pass
6	10586.000	57.31	4.90	74.0	16.69	Peak	306.00	150	Horizontal	Pass
6**	10586.000	47.22	4.90	54.0	6.78	AV	306.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_16.44.29

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11ax80 CH42 P=16

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

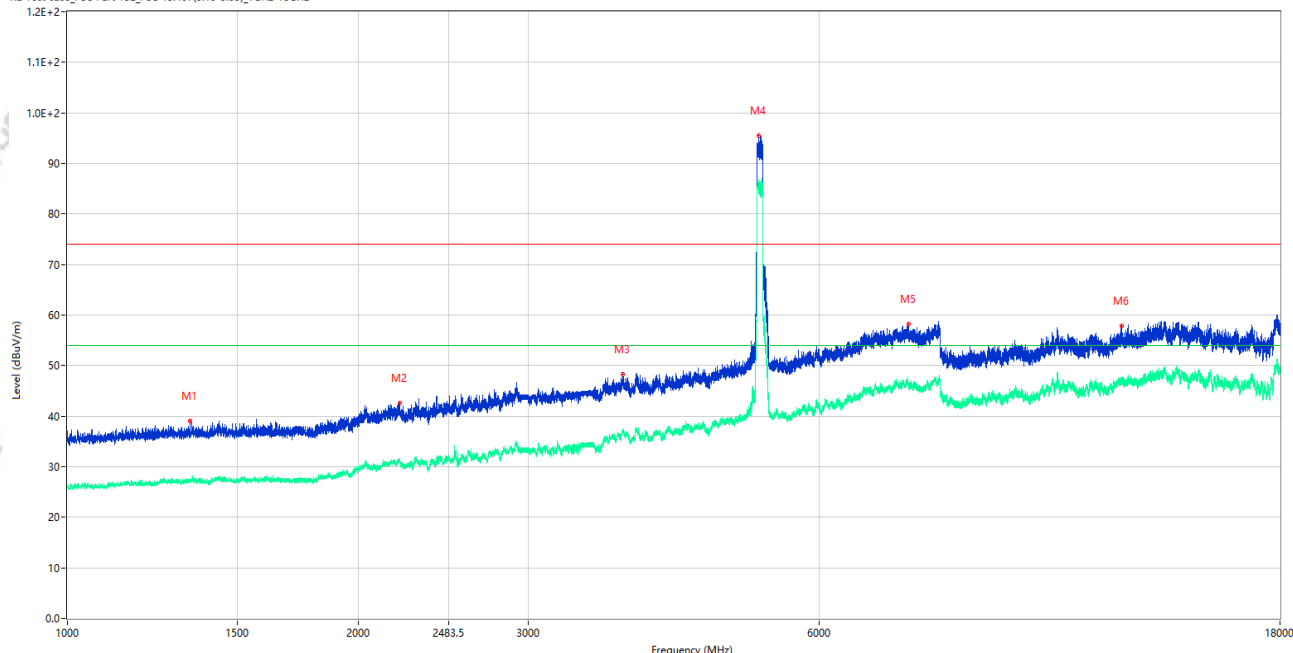

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1339.000	39.01	-16.20	74.0	34.99	Peak	219.00	150	Vertical	Pass
1**	1339.000	27.08	-16.20	54.0	26.92	AV	219.00	150	Vertical	Pass
2	2209.500	42.57	-12.04	74.0	31.43	Peak	221.00	150	Vertical	Pass
2**	2209.500	31.02	-12.04	54.0	22.98	AV	221.00	150	Vertical	Pass
3	3757.500	48.23	-3.02	74.0	25.77	Peak	103.00	150	Vertical	Pass
3**	3757.500	36.70	-3.02	54.0	17.30	AV	103.00	150	Vertical	Pass
4	5197.000	95.51	-0.19	74.0	-21.51	Peak	8.00	150	Vertical	N/A
4**	5197.000	86.21	-0.19	54.0	-32.21	AV	8.00	150	Vertical	N/A
5	7421.500	58.27	5.92	74.0	15.73	Peak	162.00	150	Vertical	Pass
5**	7421.500	46.24	5.92	54.0	7.76	AV	162.00	150	Vertical	Pass
6	12348.000	57.79	5.46	74.0	16.21	Peak	266.00	150	Vertical	Pass
6**	12348.000	47.49	5.46	54.0	6.51	AV	266.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_16.40.24

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.2G WIFI 11ax80 CH42 P=16

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

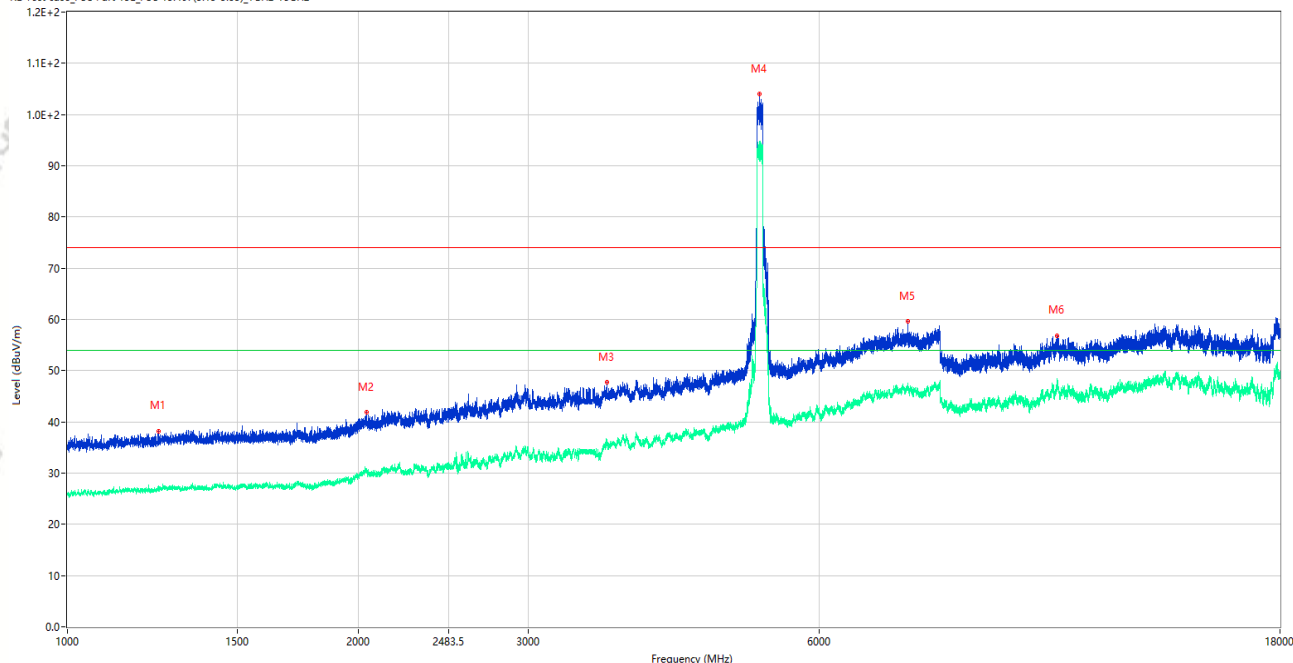

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1241.750	38.18	-16.56	74.0	35.82	Peak	64.00	150	Horizontal	Pass
1**	1241.750	27.29	-16.56	54.0	26.71	AV	64.00	150	Horizontal	Pass
2	2039.250	41.83	-12.97	74.0	32.17	Peak	0.00	150	Horizontal	Pass
2**	2039.250	30.59	-12.97	54.0	23.41	AV	0.00	150	Horizontal	Pass
3	3621.500	47.66	-4.61	74.0	26.34	Peak	190.00	150	Horizontal	Pass
3**	3621.500	35.52	-4.61	54.0	18.48	AV	190.00	150	Horizontal	Pass
4	5207.500	104.02	-0.10	74.0	-30.02	Peak	255.00	150	Horizontal	N/A
4**	5207.500	94.65	-0.10	54.0	-40.65	AV	255.00	150	Horizontal	N/A
5	7407.500	59.65	6.49	74.0	14.35	Peak	272.00	150	Horizontal	Pass
5**	7407.500	46.76	6.49	54.0	7.24	AV	272.00	150	Horizontal	Pass
6	10586.500	56.88	4.92	74.0	17.12	Peak	359.00	150	Horizontal	Pass
6**	10586.500	47.98	4.92	54.0	6.02	AV	359.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-27_17.20.06

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 52

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A11+数据线: A45

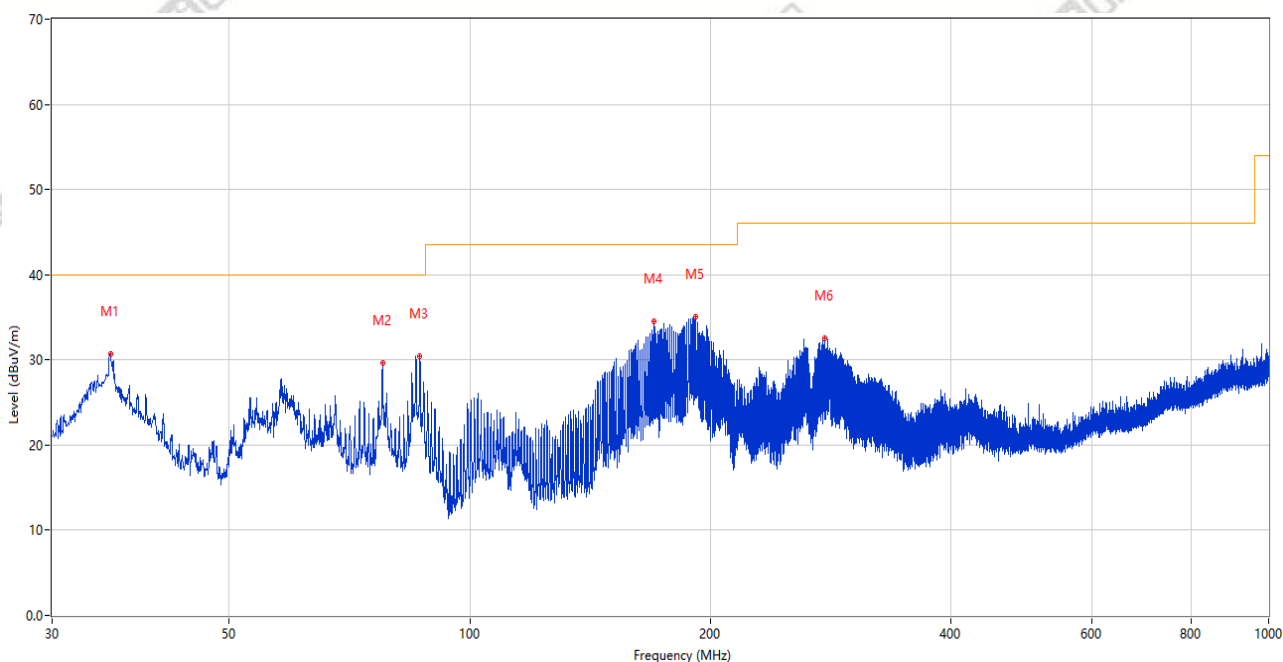

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.480	30.72	-27.57	40.0	9.28	Peak	282.00	100	Vertical	Pass
2	77.772	29.69	-30.91	40.0	10.31	Peak	297.00	200	Vertical	Pass
3	86.600	30.45	-29.17	40.0	9.55	Peak	1.00	100	Vertical	Pass
4	170.165	34.59	-28.41	43.5	8.91	Peak	328.00	200	Vertical	Pass
5	191.844	35.07	-26.02	43.5	8.43	Peak	352.00	200	Vertical	Pass
6	278.417	32.60	-23.81	46.0	13.40	Peak	31.00	200	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-28_02.10.24

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45

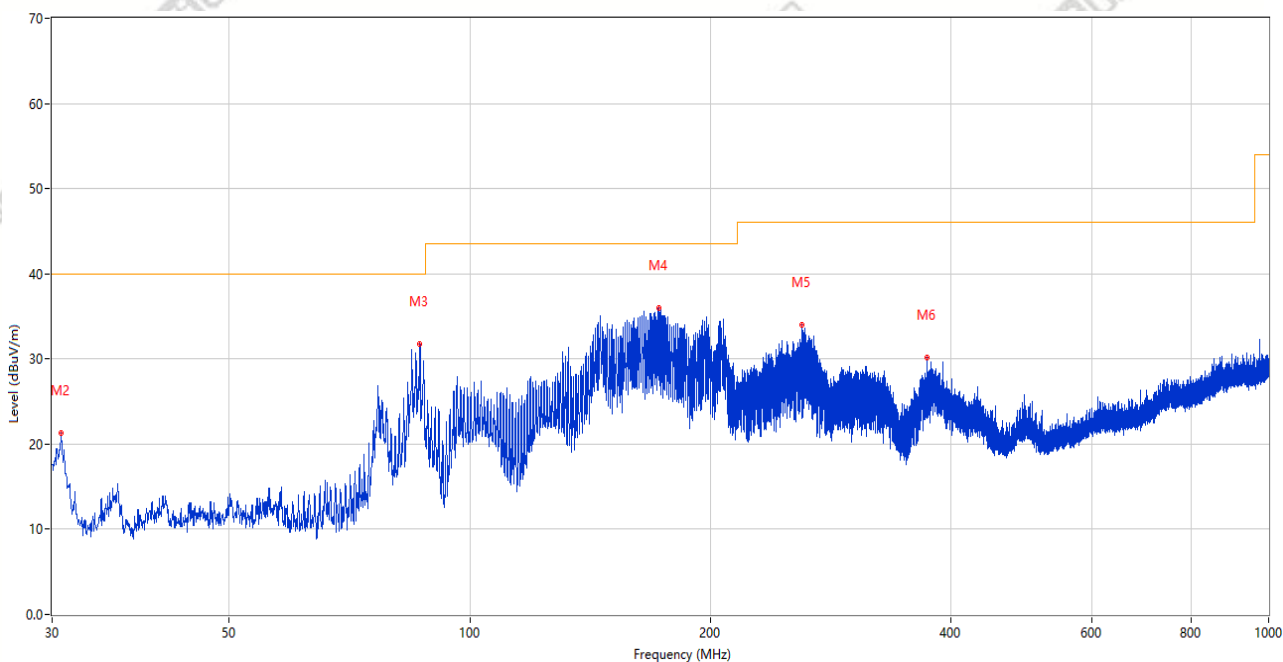

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	106.727	21.30	-26.35	43.5	22.20	Peak	25.00	200	Horizontal	Pass
2	30.825	21.34	-29.06	40.0	18.66	Peak	235.00	200	Horizontal	Pass
3	86.600	31.74	-29.17	40.0	8.26	Peak	11.00	200	Horizontal	Pass
4	172.250	35.99	-28.31	43.5	7.51	Peak	174.00	200	Horizontal	Pass
5	260.715	34.05	-24.10	46.0	11.95	Peak	76.00	100	Horizontal	Pass
6	374.010	30.20	-21.25	46.0	15.80	Peak	271.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.06.03

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11a CH60 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

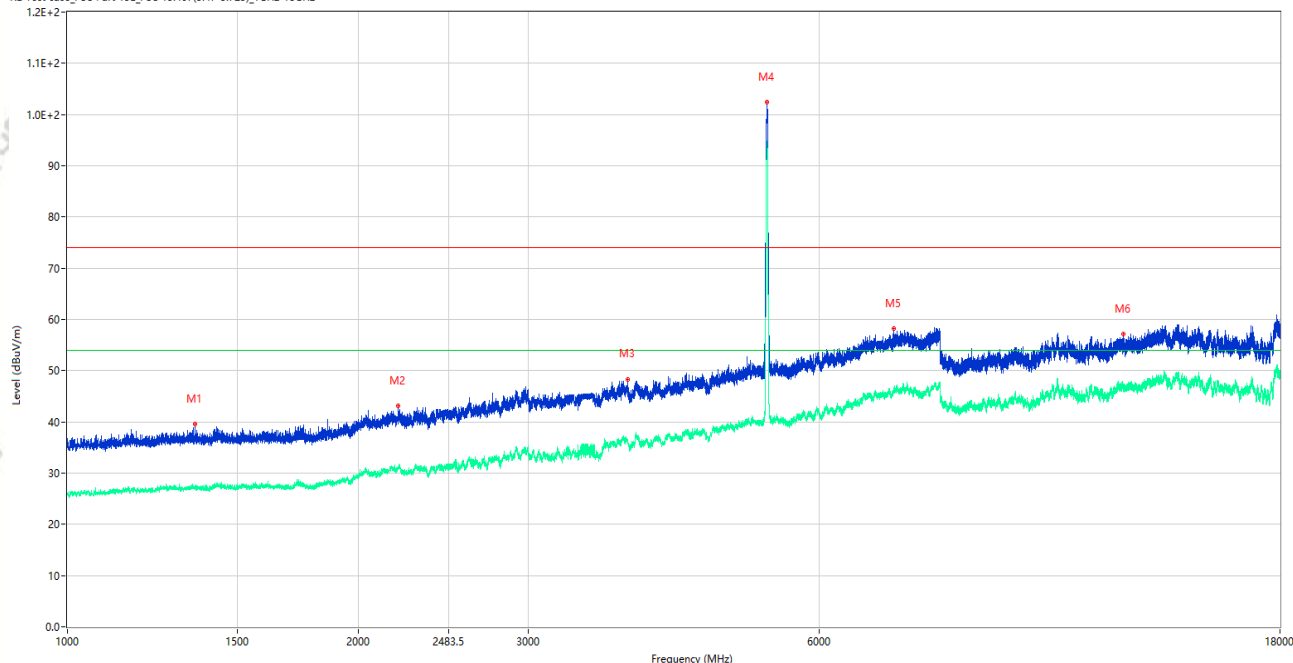

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1356.500	39.52	-16.25	74.0	34.48	Peak	117.00	150	Vertical	Pass
1**	1356.500	27.56	-16.25	54.0	26.44	AV	117.00	150	Vertical	Pass
2	2199.750	43.07	-12.53	74.0	30.93	Peak	263.00	150	Vertical	Pass
2**	2199.750	31.05	-12.53	54.0	22.95	AV	263.00	150	Vertical	Pass
3	3800.000	48.33	-3.58	74.0	25.67	Peak	0.00	150	Vertical	Pass
3**	3800.000	36.34	-3.58	54.0	17.66	AV	0.00	150	Vertical	Pass
4	5301.000	102.45	0.13	74.0	-28.45	Peak	301.00	150	Vertical	N/A
4**	5301.000	93.95	0.13	54.0	-39.95	AV	301.00	150	Vertical	N/A
5	7163.500	58.15	4.78	74.0	15.85	Peak	40.00	150	Vertical	Pass
5**	7163.500	46.10	4.78	54.0	7.90	AV	40.00	150	Vertical	Pass
6	12386.500	57.21	5.02	74.0	16.79	Peak	313.00	150	Vertical	Pass
6**	12386.500	46.41	5.02	54.0	7.59	AV	313.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.09.41

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11a CH60 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

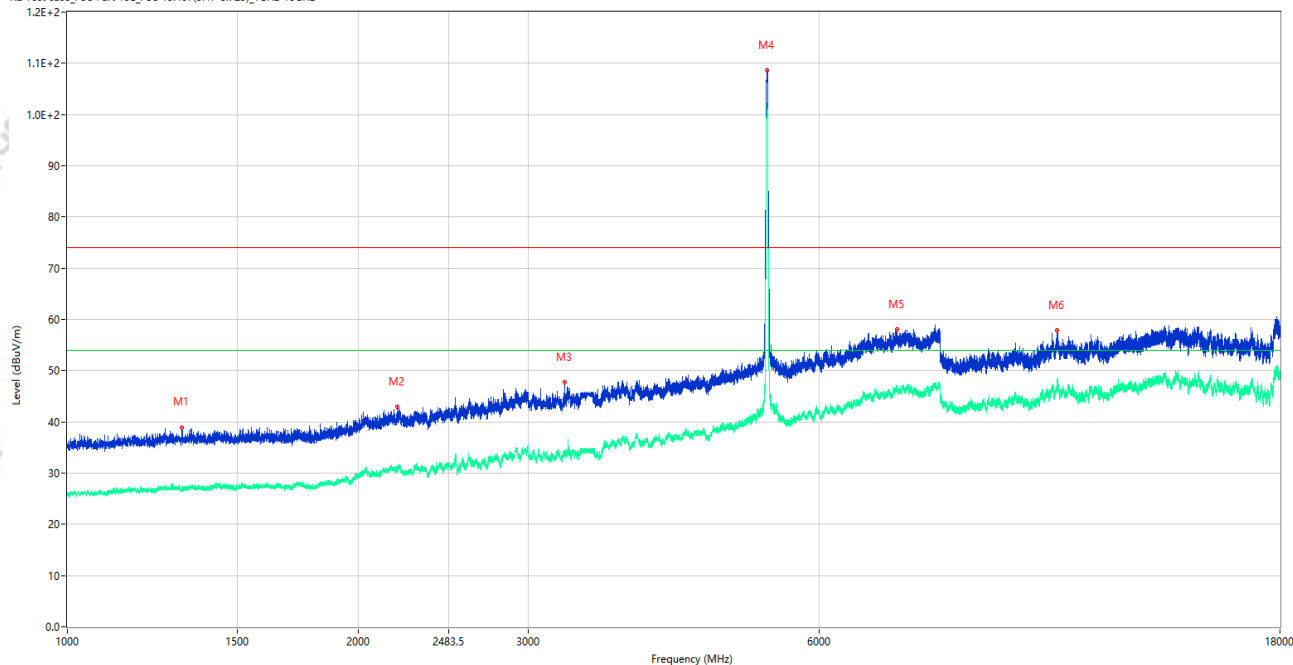

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1313.500	38.96	-16.23	74.0	35.04	Peak	6.00	150	Horizontal	Pass
1**	1313.500	26.95	-16.23	54.0	27.05	AV	6.00	150	Horizontal	Pass
2	2197.250	42.96	-12.60	74.0	31.04	Peak	136.00	150	Horizontal	Pass
2**	2197.250	31.10	-12.60	54.0	22.90	AV	136.00	150	Horizontal	Pass
3	3272.500	47.76	-6.63	74.0	26.24	Peak	319.00	150	Horizontal	Pass
3**	3272.500	34.33	-6.63	54.0	19.67	AV	319.00	150	Horizontal	Pass
4	5298.000	108.59	0.09	74.0	-34.59	Peak	219.00	150	Horizontal	N/A
4**	5298.000	100.83	0.09	54.0	-46.83	AV	219.00	150	Horizontal	N/A
5	7219.500	58.09	6.24	74.0	15.91	Peak	339.00	150	Horizontal	Pass
5**	7219.500	46.38	6.24	54.0	7.62	AV	339.00	150	Horizontal	Pass
6	10589.500	57.84	5.03	74.0	16.16	Peak	245.00	150	Horizontal	Pass
6**	10589.500	47.96	5.03	54.0	6.04	AV	245.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.21.37

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11n20 CH60 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

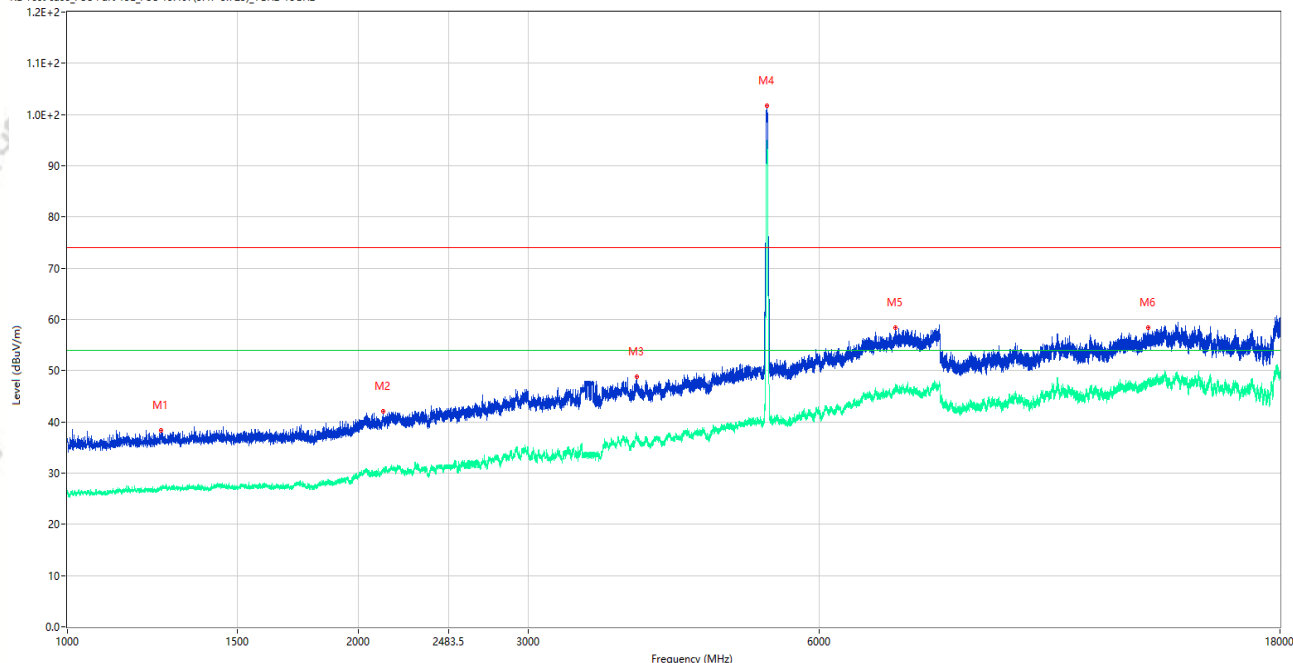

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1251.000	38.27	-16.41	74.0	35.73	Peak	235.00	150	Vertical	Pass
1**	1251.000	26.75	-16.41	54.0	27.25	AV	235.00	150	Vertical	Pass
2	2123.500	42.06	-12.94	74.0	31.94	Peak	147.00	150	Vertical	Pass
2**	2123.500	30.36	-12.94	54.0	23.64	AV	147.00	150	Vertical	Pass
3	3882.500	48.80	-2.71	74.0	25.20	Peak	40.00	150	Vertical	Pass
3**	3882.500	37.43	-2.71	54.0	16.57	AV	40.00	150	Vertical	Pass
4	5299.000	101.66	0.11	74.0	-27.66	Peak	322.00	150	Vertical	N/A
4**	5299.000	94.91	0.11	54.0	-40.91	AV	322.00	150	Vertical	N/A
5	7204.000	58.32	5.77	74.0	15.68	Peak	243.00	150	Vertical	Pass
5**	7204.000	46.35	5.77	54.0	7.65	AV	243.00	150	Vertical	Pass
6	13143.000	58.37	7.78	74.0	15.63	Peak	158.00	150	Vertical	Pass
6**	13143.000	47.55	7.78	54.0	6.45	AV	158.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.14.54

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11n20 CH60 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

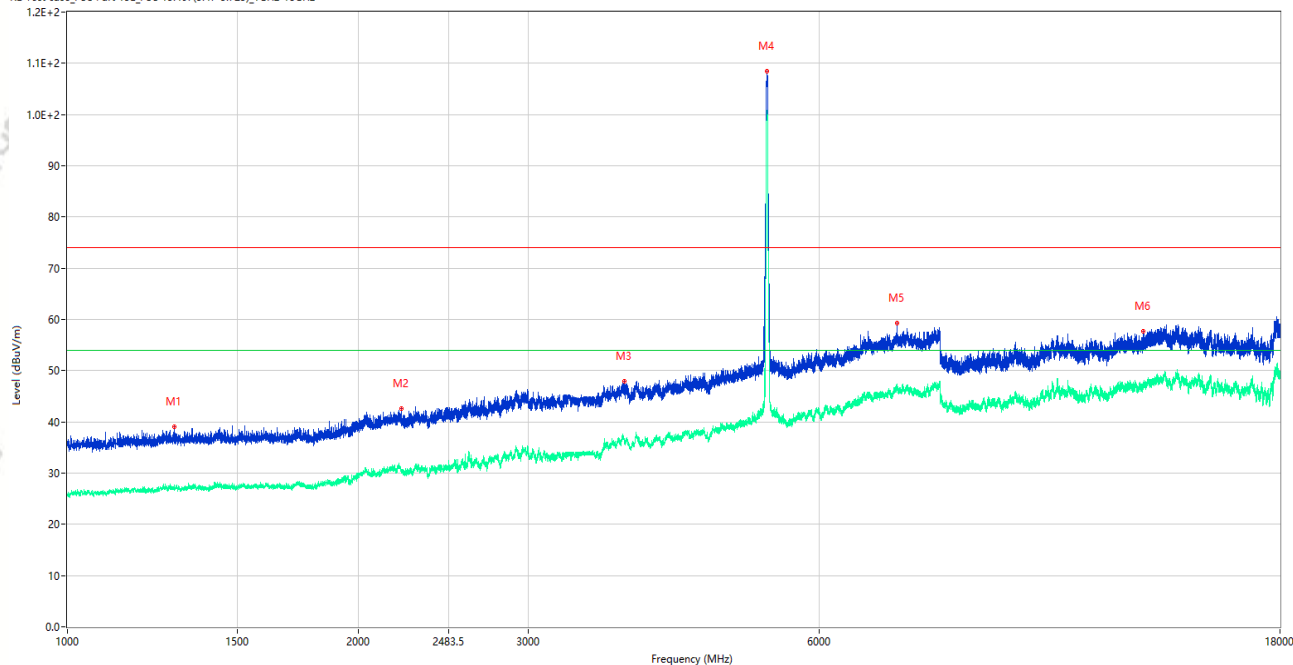

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1291.500	38.99	-16.40	74.0	35.01	Peak	85.00	150	Horizontal	Pass
1**	1291.500	27.32	-16.40	54.0	26.68	AV	85.00	150	Horizontal	Pass
2	2215.750	42.62	-12.12	74.0	31.38	Peak	285.00	150	Horizontal	Pass
2**	2215.750	30.73	-12.12	54.0	23.27	AV	285.00	150	Horizontal	Pass
3	3775.000	47.93	-3.69	74.0	26.07	Peak	83.00	150	Horizontal	Pass
3**	3775.000	36.13	-3.69	54.0	17.87	AV	83.00	150	Horizontal	Pass
4	5301.500	108.42	0.13	74.0	-34.42	Peak	256.00	150	Horizontal	N/A
4**	5301.500	100.91	0.13	54.0	-46.91	AV	256.00	150	Horizontal	N/A
5	7222.500	59.30	6.20	74.0	14.70	Peak	1.00	150	Horizontal	Pass
5**	7222.500	46.42	6.20	54.0	7.58	AV	1.00	150	Horizontal	Pass
6	13005.500	57.68	6.98	74.0	16.32	Peak	59.00	150	Horizontal	Pass
6**	13005.500	47.37	6.98	54.0	6.63	AV	59.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.27.35

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11n40 CH54 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

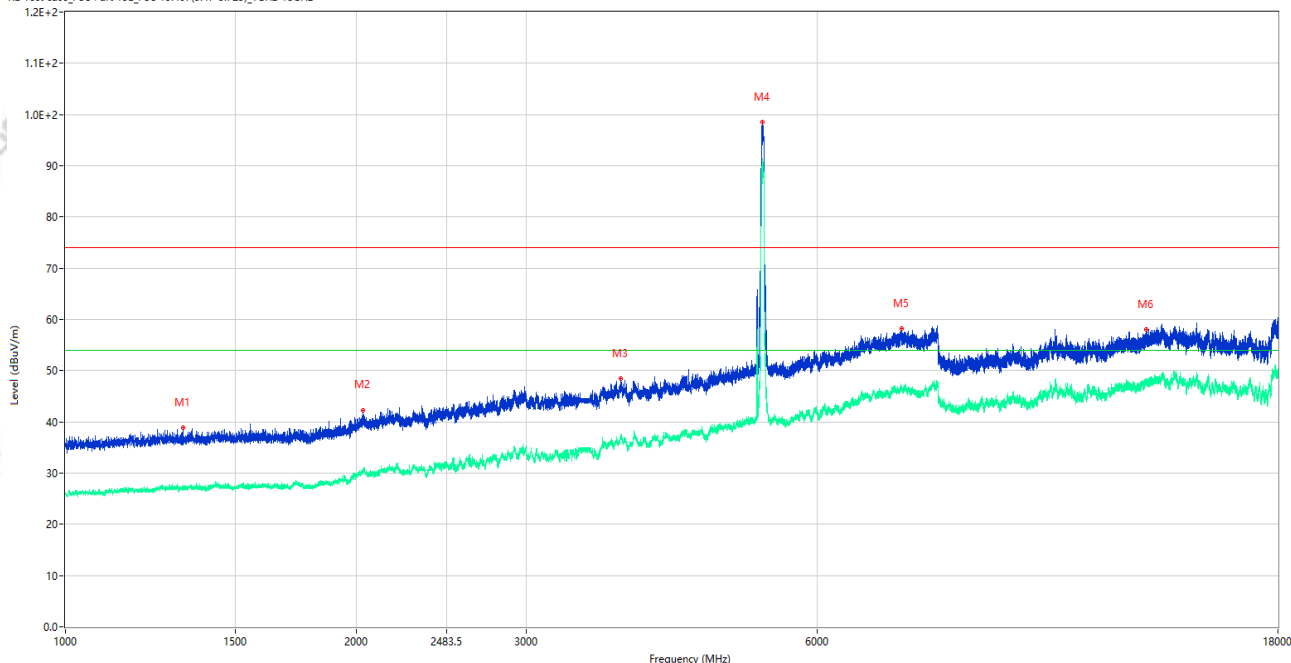

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1322.750	38.81	-16.31	74.0	35.19	Peak	57.00	150	Vertical	Pass
1**	1322.750	27.01	-16.31	54.0	26.99	AV	57.00	150	Vertical	Pass
2	2032.250	42.32	-13.29	74.0	31.68	Peak	228.00	150	Vertical	Pass
2**	2032.250	30.48	-13.29	54.0	23.52	AV	228.00	150	Vertical	Pass
3	3759.500	48.43	-2.96	74.0	25.57	Peak	18.00	150	Vertical	Pass
3**	3759.500	36.91	-2.96	54.0	17.09	AV	18.00	150	Vertical	Pass
4	5268.000	98.58	-0.57	74.0	-24.58	Peak	359.00	150	Vertical	N/A
4**	5268.000	91.41	-0.57	54.0	-37.41	AV	359.00	150	Vertical	N/A
5	7342.500	58.26	5.53	74.0	15.74	Peak	180.00	150	Vertical	Pass
5**	7342.500	46.26	5.53	54.0	7.74	AV	180.00	150	Vertical	Pass
6	13139.000	58.09	7.79	74.0	15.91	Peak	123.00	150	Vertical	Pass
6**	13139.000	47.62	7.79	54.0	6.38	AV	123.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.31.20

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11n40 CH54 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

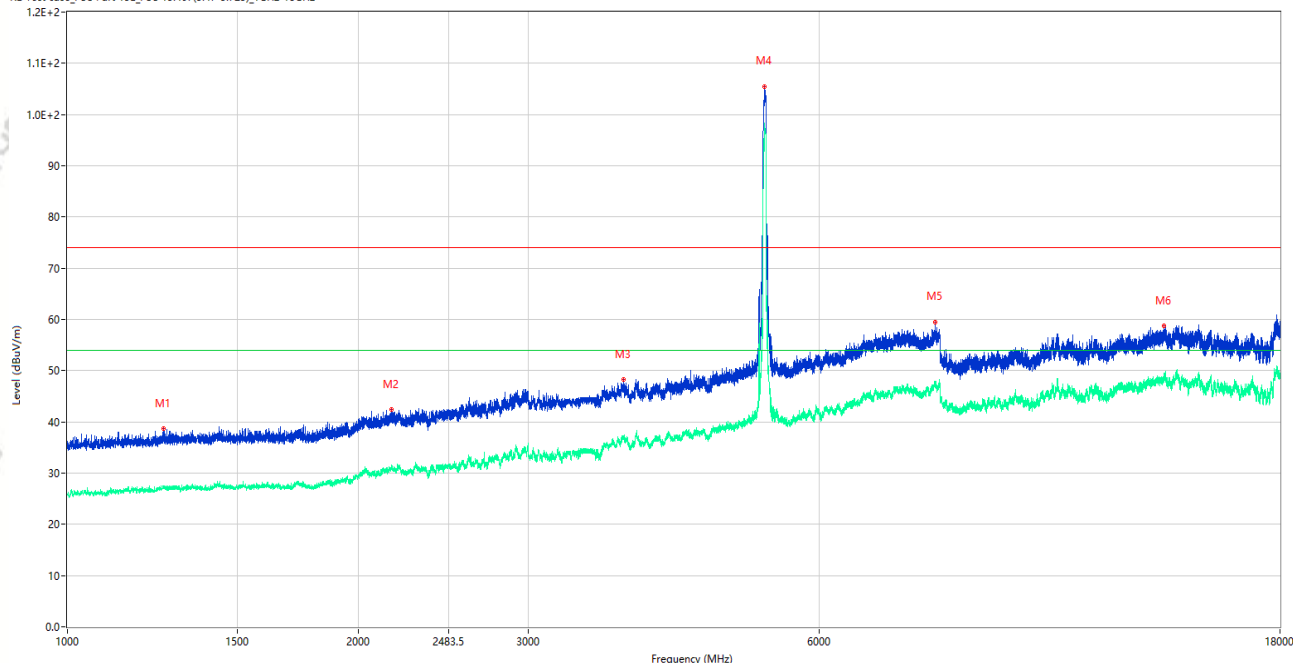

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1257.500	38.69	-16.26	74.0	35.31	Peak	207.00	150	Horizontal	Pass
1**	1257.500	27.07	-16.26	54.0	26.93	AV	207.00	150	Horizontal	Pass
2	2163.000	42.44	-12.65	74.0	31.56	Peak	325.00	150	Horizontal	Pass
2**	2163.000	30.62	-12.65	54.0	23.38	AV	325.00	150	Horizontal	Pass
3	3767.000	48.25	-3.26	74.0	25.75	Peak	358.00	150	Horizontal	Pass
3**	3767.000	36.59	-3.26	54.0	17.41	AV	358.00	150	Horizontal	Pass
4	5268.500	105.52	-0.56	74.0	-31.52	Peak	249.00	150	Horizontal	N/A
4**	5268.500	98.13	-0.56	54.0	-44.13	AV	249.00	150	Horizontal	N/A
5	7910.000	59.53	6.92	74.0	14.47	Peak	77.00	150	Horizontal	Pass
5**	7910.000	46.90	6.92	54.0	7.10	AV	77.00	150	Horizontal	Pass
6	13662.500	58.68	9.02	74.0	15.32	Peak	137.00	150	Horizontal	Pass
6**	13662.500	48.60	9.02	54.0	5.40	AV	137.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.42.07

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11ac80 CH58 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

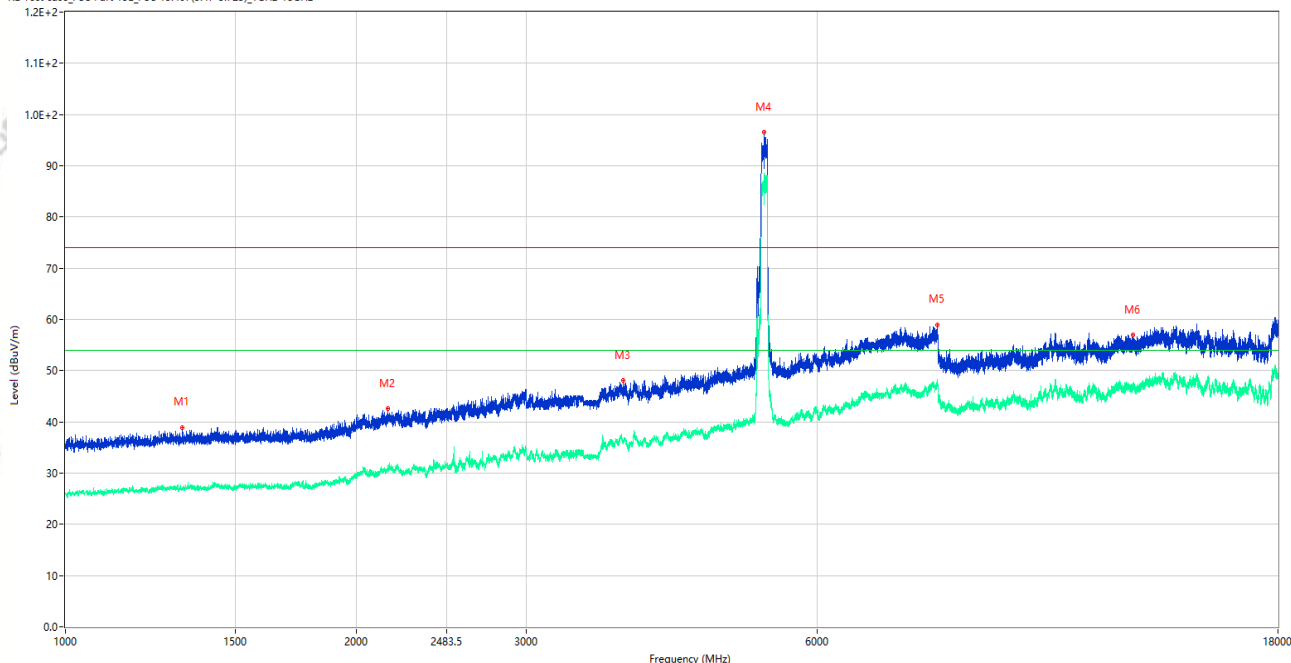

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1321.000	38.95	-16.30	74.0	35.05	Peak	56.00	150	Vertical	Pass
1**	1321.000	26.89	-16.30	54.0	27.11	AV	56.00	150	Vertical	Pass
2	2155.750	42.53	-12.81	74.0	31.47	Peak	71.00	150	Vertical	Pass
2**	2155.750	30.88	-12.81	54.0	23.12	AV	71.00	150	Vertical	Pass
3	3776.500	48.08	-3.78	74.0	25.92	Peak	41.00	150	Vertical	Pass
3**	3776.500	36.16	-3.78	54.0	17.84	AV	41.00	150	Vertical	Pass
4	5292.500	96.62	-0.01	74.0	-22.62	Peak	308.00	150	Vertical	N/A
4**	5292.500	88.30	-0.01	54.0	-34.30	AV	308.00	150	Vertical	N/A
5	7998.500	59.01	7.27	74.0	14.99	Peak	299.00	150	Vertical	Pass
5**	7998.500	47.35	7.27	54.0	6.65	AV	299.00	150	Vertical	Pass
6	12747.500	57.07	5.91	74.0	16.93	Peak	79.00	150	Vertical	Pass
6**	12747.500	46.55	5.91	54.0	7.45	AV	79.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.36.58

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11ac80 CH58 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

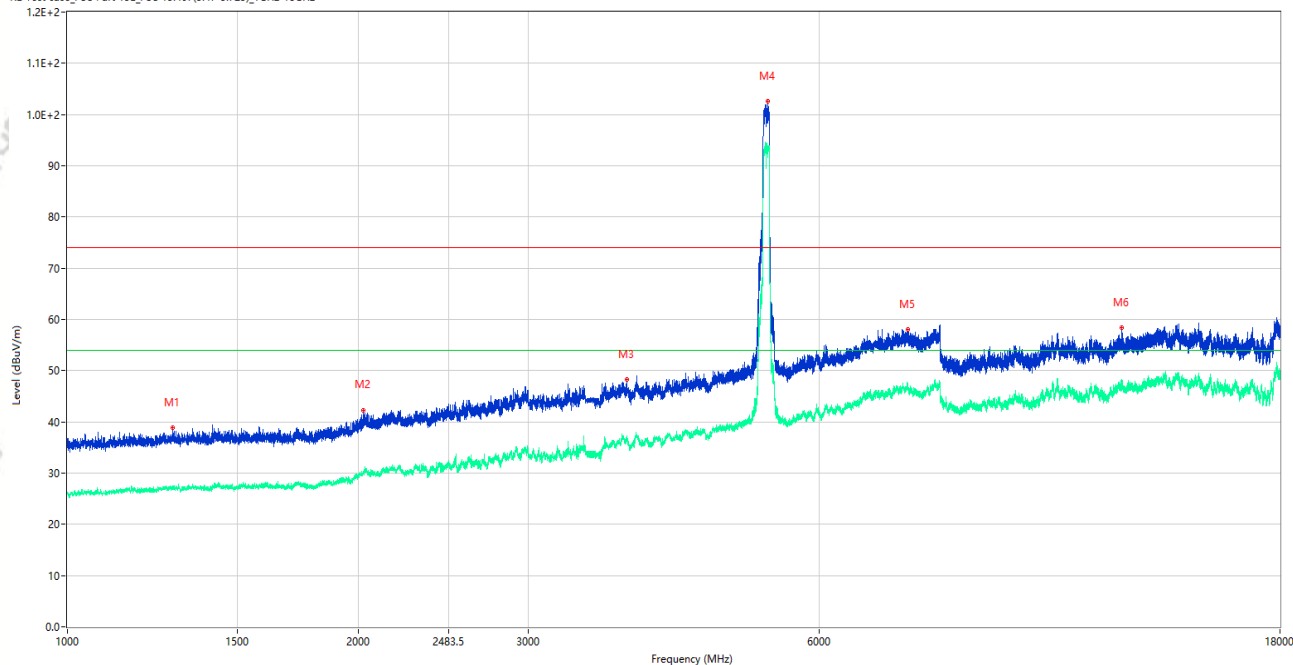

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.750	38.87	-16.44	74.0	35.13	Peak	322.00	150	Horizontal	Pass
1**	1284.750	26.99	-16.44	54.0	27.01	AV	322.00	150	Horizontal	Pass
2	2024.000	42.22	-13.63	74.0	31.78	Peak	249.00	150	Horizontal	Pass
2**	2024.000	29.88	-13.63	54.0	24.12	AV	249.00	150	Horizontal	Pass
3	3793.500	48.34	-3.77	74.0	25.66	Peak	0.00	150	Horizontal	Pass
3**	3793.500	36.64	-3.77	54.0	17.36	AV	0.00	150	Horizontal	Pass
4	5305.000	102.54	0.12	74.0	-28.54	Peak	255.00	150	Horizontal	N/A
4**	5305.000	93.43	0.12	54.0	-39.43	AV	255.00	150	Horizontal	N/A
5	7416.500	58.10	6.18	74.0	15.90	Peak	272.00	150	Horizontal	Pass
5**	7416.500	46.65	6.18	54.0	7.35	AV	272.00	150	Horizontal	Pass
6	12344.001	58.44	5.48	74.0	15.56	Peak	32.00	150	Horizontal	Pass
6**	12344.001	47.12	5.48	54.0	6.88	AV	32.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.47.59

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11ax20 CH60 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

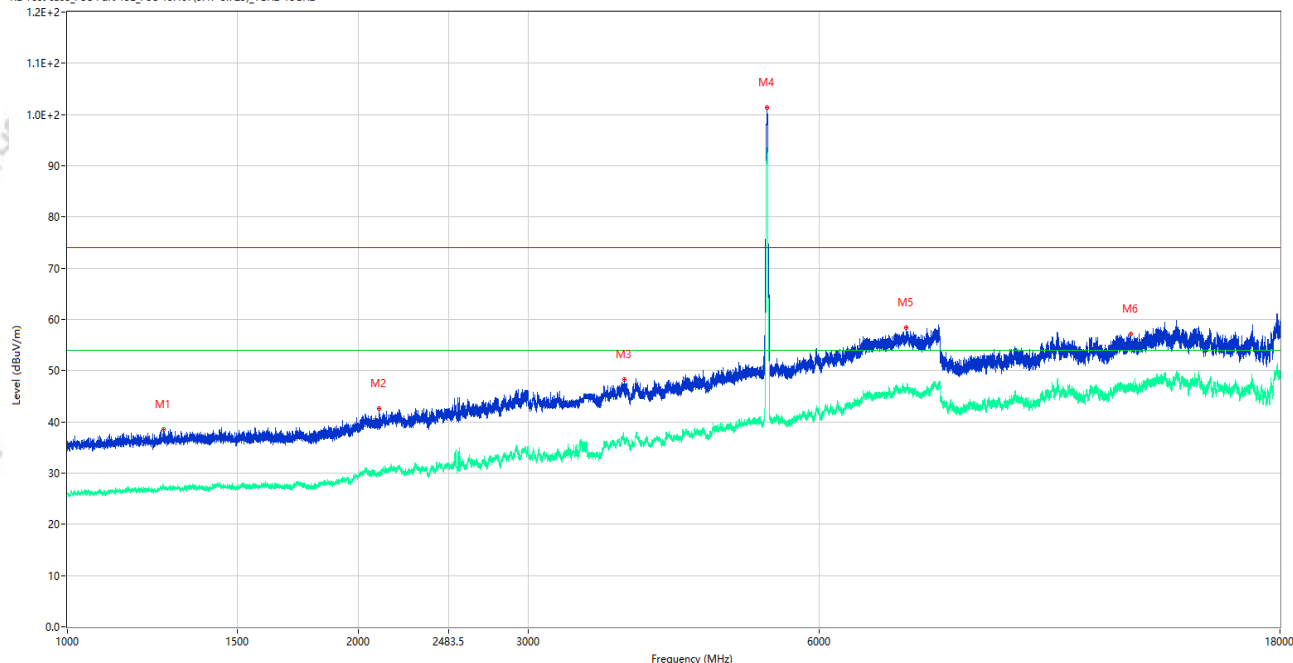

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1257.750	38.56	-16.26	74.0	35.44	Peak	360.00	150	Vertical	Pass
1**	1257.750	27.35	-16.26	54.0	26.65	AV	360.00	150	Vertical	Pass
2	2103.750	42.65	-13.18	74.0	31.35	Peak	307.00	150	Vertical	Pass
2**	2103.750	29.54	-13.18	54.0	24.46	AV	307.00	150	Vertical	Pass
3	3769.500	48.20	-3.37	74.0	25.80	Peak	359.00	150	Vertical	Pass
3**	3769.500	36.61	-3.37	54.0	17.39	AV	359.00	150	Vertical	Pass
4	5300.500	101.39	0.13	74.0	-27.39	Peak	0.00	150	Vertical	N/A
4**	5300.500	92.16	0.13	54.0	-38.16	AV	0.00	150	Vertical	N/A
5	7380.500	58.37	5.88	74.0	15.63	Peak	67.00	150	Vertical	Pass
5**	7380.500	46.04	5.88	54.0	7.96	AV	67.00	150	Vertical	Pass
6	12618.000	57.10	5.50	74.0	16.90	Peak	215.00	150	Vertical	Pass
6**	12618.000	46.34	5.50	54.0	7.66	AV	215.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_17.54.29

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11ax20 CH60 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

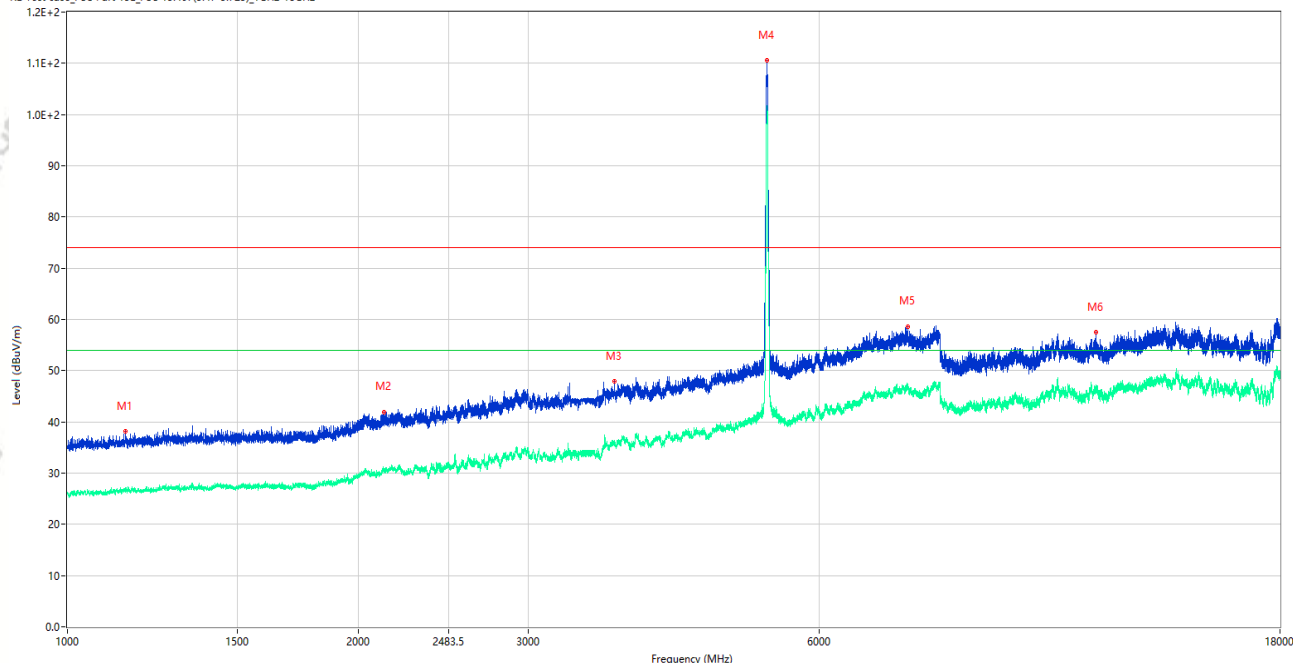

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1148.250	38.13	-16.74	74.0	35.87	Peak	9.00	150	Horizontal	Pass
1**	1148.250	26.66	-16.74	54.0	27.34	AV	9.00	150	Horizontal	Pass
2	2128.250	41.94	-12.88	74.0	32.06	Peak	214.00	150	Horizontal	Pass
2**	2128.250	30.38	-12.88	54.0	23.62	AV	214.00	150	Horizontal	Pass
3	3681.500	47.96	-4.03	74.0	26.04	Peak	342.00	150	Horizontal	Pass
3**	3681.500	36.31	-4.03	54.0	17.69	AV	342.00	150	Horizontal	Pass
4	5300.500	110.61	0.13	74.0	-36.61	Peak	244.00	150	Horizontal	N/A
4**	5300.500	100.34	0.13	54.0	-46.34	AV	244.00	150	Horizontal	N/A
5	7410.000	58.57	6.53	74.0	15.43	Peak	221.00	150	Horizontal	Pass
5**	7410.000	47.05	6.53	54.0	6.95	AV	221.00	150	Horizontal	Pass
6	11598.500	57.52	4.01	74.0	16.48	Peak	360.00	150	Horizontal	Pass
6**	11598.500	46.90	4.01	54.0	7.10	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_18.06.32

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11ax40 CH54 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

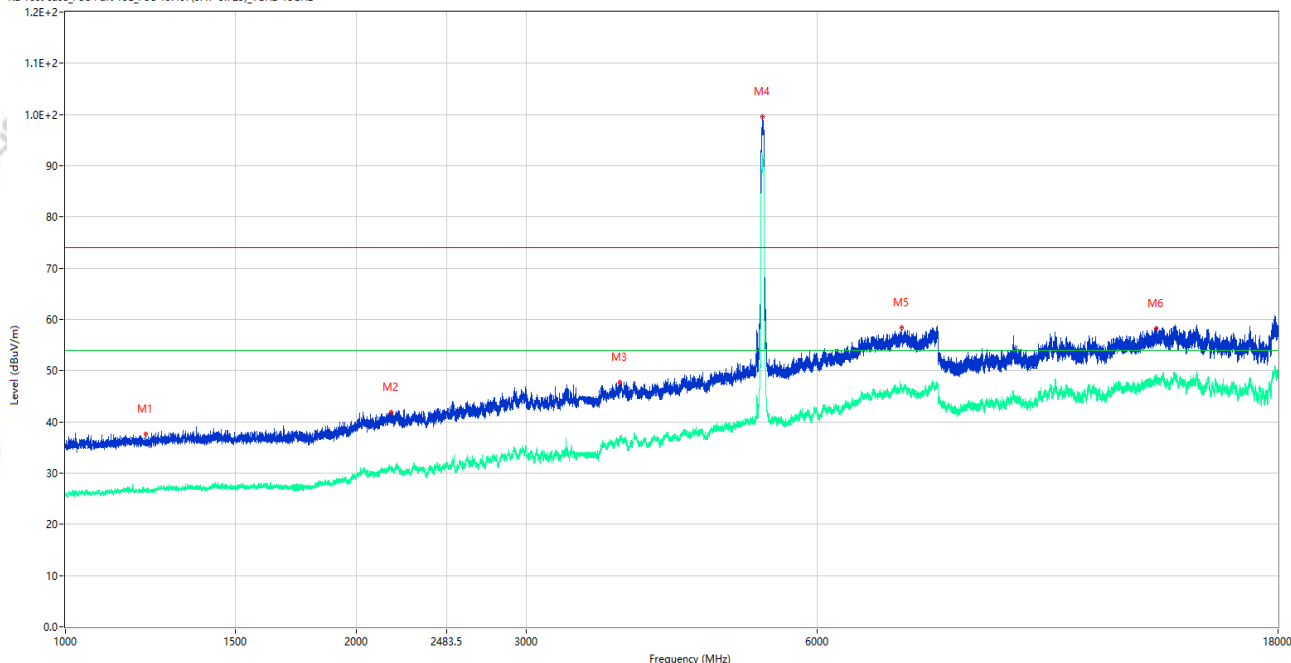

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1212.000	37.55	-16.50	74.0	36.45	Peak	94.00	150	Vertical	Pass
1**	1212.000	26.58	-16.50	54.0	27.42	AV	94.00	150	Vertical	Pass
2	2173.000	41.90	-12.40	74.0	32.10	Peak	107.00	150	Vertical	Pass
2**	2173.000	30.58	-12.40	54.0	23.42	AV	107.00	150	Vertical	Pass
3	3751.500	47.72	-3.20	74.0	26.28	Peak	353.00	150	Vertical	Pass
3**	3751.500	36.95	-3.20	54.0	17.05	AV	353.00	150	Vertical	Pass
4	5267.000	99.53	-0.58	74.0	-25.53	Peak	342.00	150	Vertical	N/A
4**	5267.000	91.33	-0.58	54.0	-37.33	AV	342.00	150	Vertical	N/A
5	7342.000	58.32	5.54	74.0	15.68	Peak	294.00	150	Vertical	Pass
5**	7342.000	46.51	5.54	54.0	7.49	AV	294.00	150	Vertical	Pass
6	13471.500	58.22	8.54	74.0	15.78	Peak	52.00	150	Vertical	Pass
6**	13471.500	48.45	8.54	54.0	5.55	AV	52.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_18.00.57

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11ax40 CH54 P=15

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

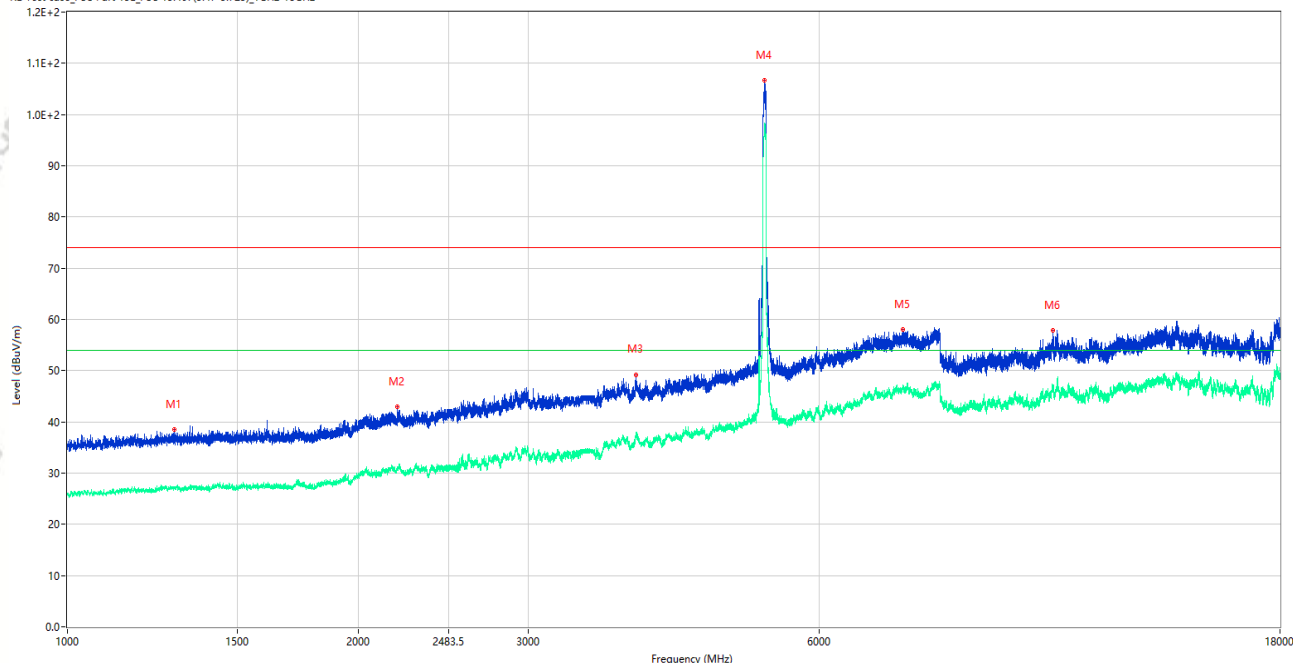

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1289.500	38.48	-16.42	74.0	35.52	Peak	104.00	150	Horizontal	Pass
1**	1289.500	27.06	-16.42	54.0	26.94	AV	104.00	150	Horizontal	Pass
2	2193.750	42.88	-12.69	74.0	31.12	Peak	230.00	150	Horizontal	Pass
2**	2193.750	30.74	-12.69	54.0	23.26	AV	230.00	150	Horizontal	Pass
3	3876.000	49.23	-2.80	74.0	24.77	Peak	293.00	150	Horizontal	Pass
3**	3876.000	37.57	-2.80	54.0	16.43	AV	293.00	150	Horizontal	Pass
4	5271.000	106.72	-0.51	74.0	-32.72	Peak	223.00	150	Horizontal	N/A
4**	5271.000	97.70	-0.51	54.0	-43.70	AV	223.00	150	Horizontal	N/A
5	7322.000	58.05	5.75	74.0	15.95	Peak	0.00	150	Horizontal	Pass
5**	7322.000	46.51	5.75	54.0	7.49	AV	0.00	150	Horizontal	Pass
6	10477.500	57.87	4.04	74.0	16.13	Peak	271.00	150	Horizontal	Pass
6**	10477.500	46.29	4.04	54.0	7.71	AV	271.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_18.12.58

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11ax80 CH58 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

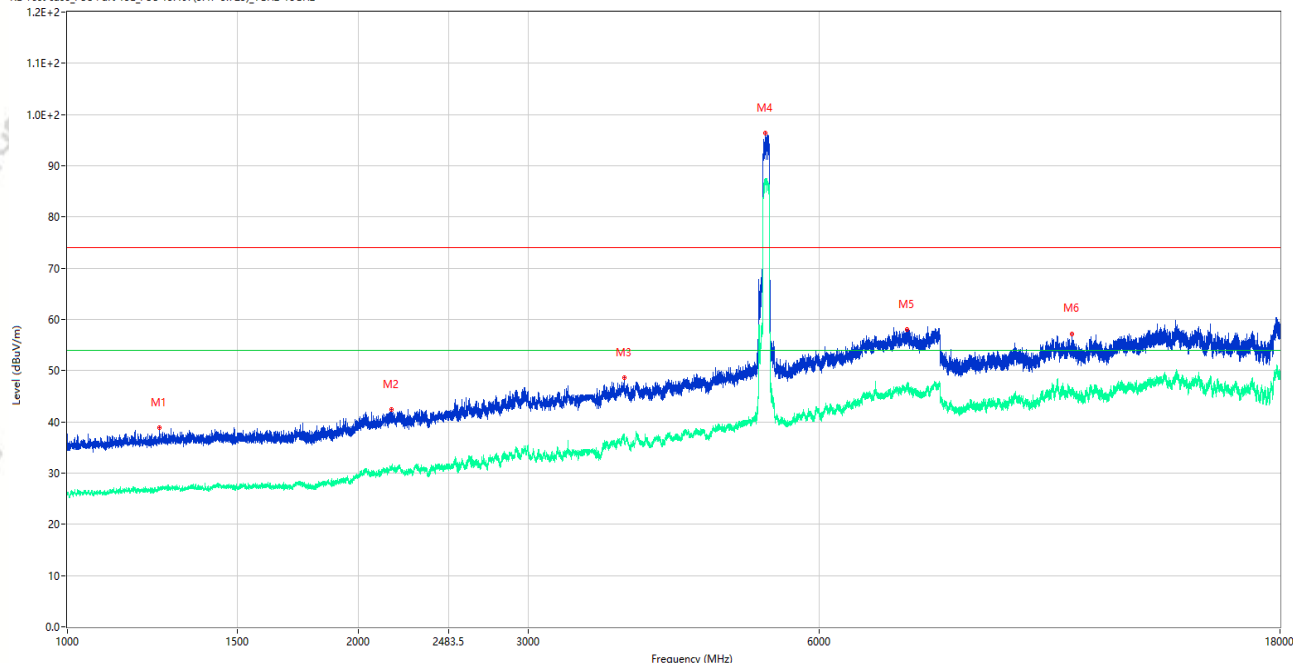

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1245.500	38.93	-16.50	74.0	35.07	Peak	257.00	150	Vertical	Pass
1**	1245.500	26.65	-16.50	54.0	27.35	AV	257.00	150	Vertical	Pass
2	2163.750	42.51	-12.63	74.0	31.49	Peak	136.00	150	Vertical	Pass
2**	2163.750	31.28	-12.63	54.0	22.72	AV	136.00	150	Vertical	Pass
3	3770.000	48.62	-3.39	74.0	25.38	Peak	0.00	150	Vertical	Pass
3**	3770.000	36.30	-3.39	54.0	17.70	AV	0.00	150	Vertical	Pass
4	5275.500	96.37	-0.42	74.0	-22.37	Peak	0.00	150	Vertical	N/A
4**	5275.500	87.11	-0.42	54.0	-33.11	AV	0.00	150	Vertical	N/A
5	7405.500	57.97	6.46	74.0	16.03	Peak	264.00	150	Vertical	Pass
5**	7405.500	46.81	6.46	54.0	7.19	AV	264.00	150	Vertical	Pass
6	10962.000	57.23	3.54	74.0	16.77	Peak	178.00	150	Vertical	Pass
6**	10962.000	46.18	3.54	54.0	7.82	AV	178.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-18_18.17.32

EUT Name: Mobile Computer

Temp.(°C): 21.7

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: 5.3G WIFI 11ax80 CH58 P=15.5

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

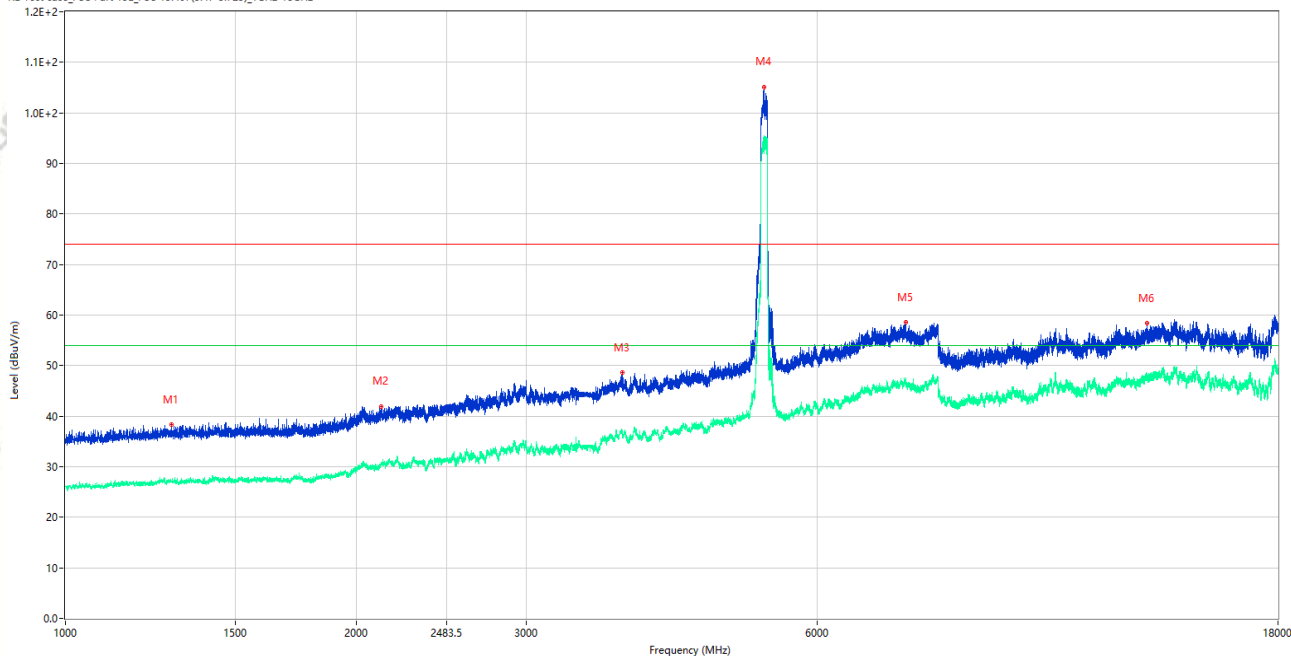

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1287.750	38.39	-16.43	74.0	35.61	Peak	59.00	150	Horizontal	Pass
1**	1287.750	27.00	-16.43	54.0	27.00	AV	59.00	150	Horizontal	Pass
2	2122.250	41.97	-12.96	74.0	32.03	Peak	270.00	150	Horizontal	Pass
2**	2122.250	30.43	-12.96	54.0	23.57	AV	270.00	150	Horizontal	Pass
3	3772.500	48.62	-3.54	74.0	25.38	Peak	283.00	150	Horizontal	Pass
3**	3772.500	36.23	-3.54	54.0	17.77	AV	283.00	150	Horizontal	Pass
4	5286.000	105.16	-0.16	74.0	-31.16	Peak	251.00	150	Horizontal	N/A
4**	5286.000	95.25	-0.16	54.0	-41.25	AV	251.00	150	Horizontal	N/A
5	7414.500	58.52	6.29	74.0	15.48	Peak	134.00	150	Horizontal	Pass
5**	7414.500	46.60	6.29	54.0	7.40	AV	134.00	150	Horizontal	Pass
6	13171.000	58.44	7.72	74.0	15.56	Peak	2.00	150	Horizontal	Pass
6**	13171.000	47.33	7.72	54.0	6.67	AV	2.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_01.39.15

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

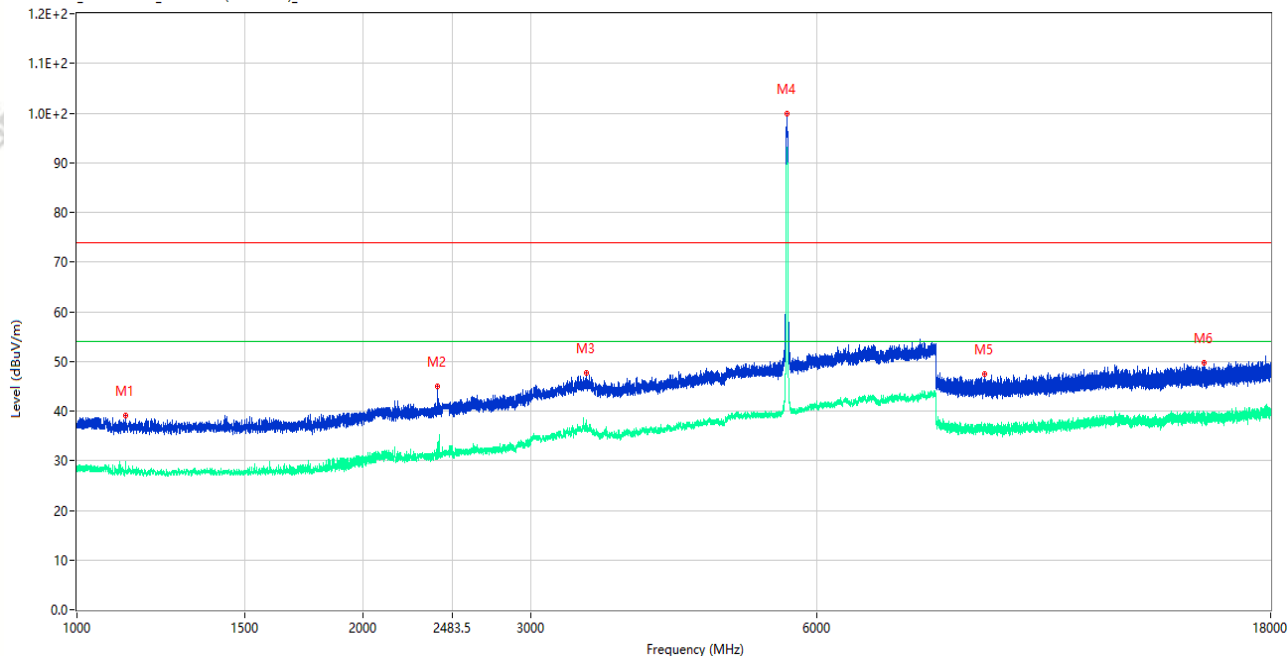

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.500	39.13	-15.63	74.0	34.87	Peak	321.00	150	Vertical	Pass
1**	1125.500	29.45	-15.63	54.0	24.55	AV	321.00	150	Vertical	Pass
2	2394.500	44.97	-12.89	74.0	29.03	Peak	126.00	150	Vertical	Pass
2**	2394.500	32.77	-12.89	54.0	21.23	AV	126.00	150	Vertical	Pass
3	3432.000	47.68	-5.06	74.0	26.32	Peak	187.00	150	Vertical	Pass
3**	3432.000	36.97	-5.06	54.0	17.03	AV	187.00	150	Vertical	Pass
4	5580.500	99.89	-2.85	74.0	-25.89	Peak	43.00	150	Vertical	N/A
4**	5580.500	92.05	-2.85	54.0	-38.05	AV	43.00	150	Vertical	N/A
5	9001.062	47.40	-4.51	74.0	26.60	Peak	190.00	150	Vertical	Pass
5**	9001.062	37.00	-4.51	54.0	17.00	AV	190.00	150	Vertical	Pass
6	15320.138	49.61	-2.49	74.0	24.39	Peak	346.00	150	Vertical	Pass
6**	15320.138	37.76	-2.49	54.0	16.24	AV	346.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_01.34.58

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

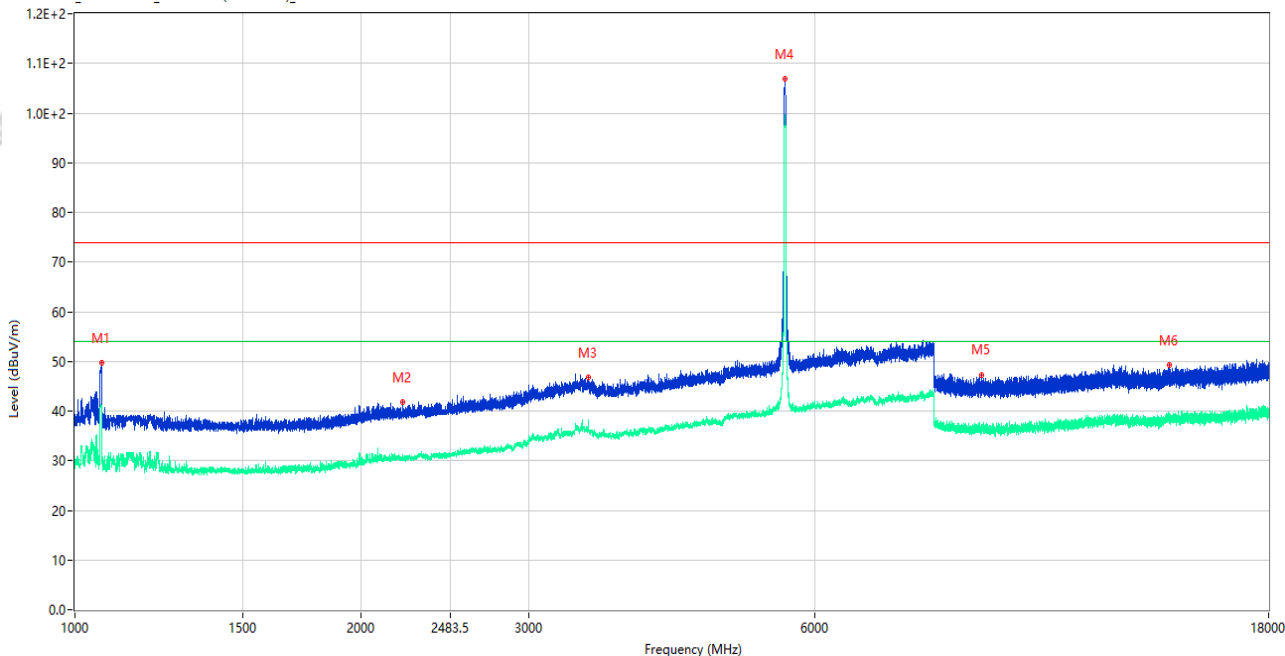

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1066.250	49.70	-15.14	74.0	24.30	Peak	139.00	150	Horizontal	Pass
1**	1066.250	40.70	-15.14	54.0	13.30	AV	139.00	150	Horizontal	Pass
2	2209.000	41.85	-13.30	74.0	32.15	Peak	119.00	150	Horizontal	Pass
2**	2209.000	30.32	-13.30	54.0	23.68	AV	119.00	150	Horizontal	Pass
3	3463.500	46.75	-5.04	74.0	27.25	Peak	283.00	150	Horizontal	Pass
3**	3463.500	36.21	-5.04	54.0	17.79	AV	283.00	150	Horizontal	Pass
4	5582.500	106.81	-2.84	74.0	-32.81	Peak	302.00	150	Horizontal	N/A
4**	5582.500	99.42	-2.84	54.0	-45.42	AV	302.00	150	Horizontal	N/A
5	8993.225	47.32	-4.54	74.0	26.68	Peak	357.00	150	Horizontal	Pass
5**	8993.225	36.14	-4.54	54.0	17.86	AV	357.00	150	Horizontal	Pass
6	14148.338	49.26	-1.25	74.0	24.74	Peak	211.00	150	Horizontal	Pass
6**	14148.338	38.19	-1.25	54.0	15.81	AV	211.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_02.05.09

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n20 CH116 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

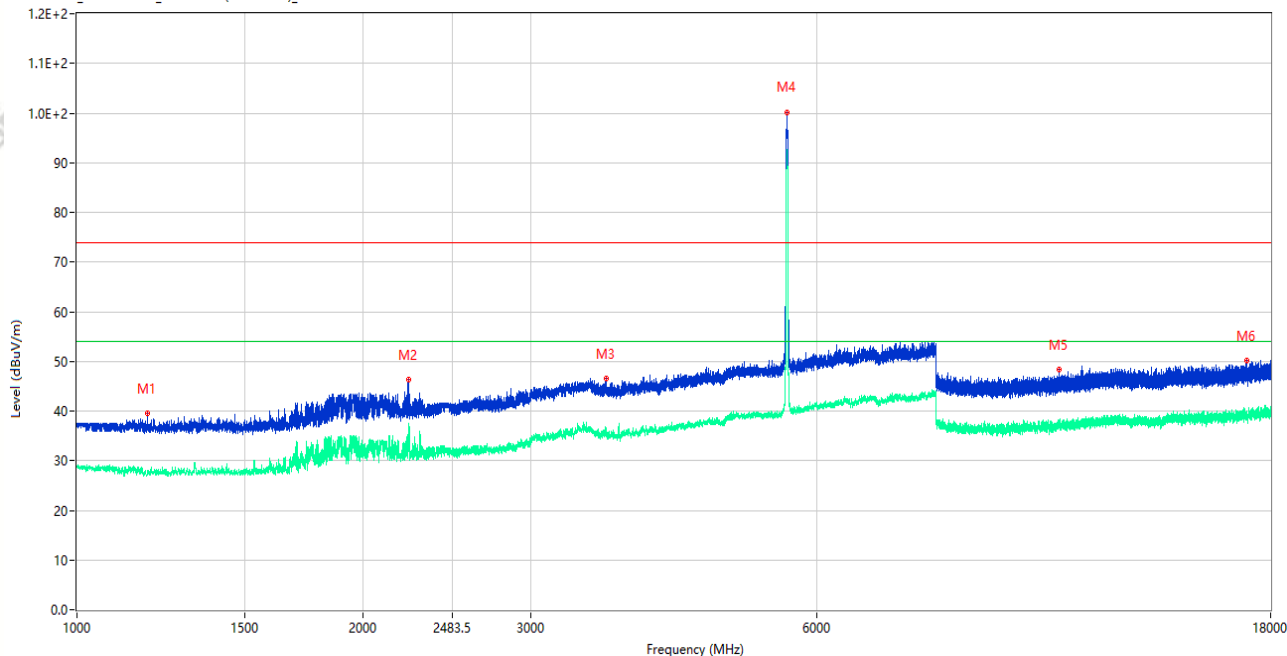

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1187.250	39.56	-15.89	74.0	34.44	Peak	72.00	150	Vertical	Pass
1**	1187.250	27.71	-15.89	54.0	26.29	AV	72.00	150	Vertical	Pass
2	2234.750	46.40	-13.10	74.0	27.60	Peak	113.00	150	Vertical	Pass
2**	2234.750	37.42	-13.10	54.0	16.58	AV	113.00	150	Vertical	Pass
3	3598.500	46.49	-5.07	74.0	27.51	Peak	193.00	150	Vertical	Pass
3**	3598.500	36.57	-5.07	54.0	17.43	AV	193.00	150	Vertical	Pass
4	5578.000	100.21	-2.89	74.0	-26.21	Peak	39.00	150	Vertical	N/A
4**	5578.000	90.14	-2.89	54.0	-36.14	AV	39.00	150	Vertical	N/A
5	10797.987	48.27	-3.22	74.0	25.73	Peak	5.00	150	Vertical	Pass
5**	10797.987	37.21	-3.22	54.0	16.79	AV	5.00	150	Vertical	Pass
6	16980.449	50.09	-1.14	74.0	23.91	Peak	143.00	150	Vertical	Pass
6**	16980.449	38.99	-1.14	54.0	15.01	AV	143.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_02.09.37

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n20 CH116 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

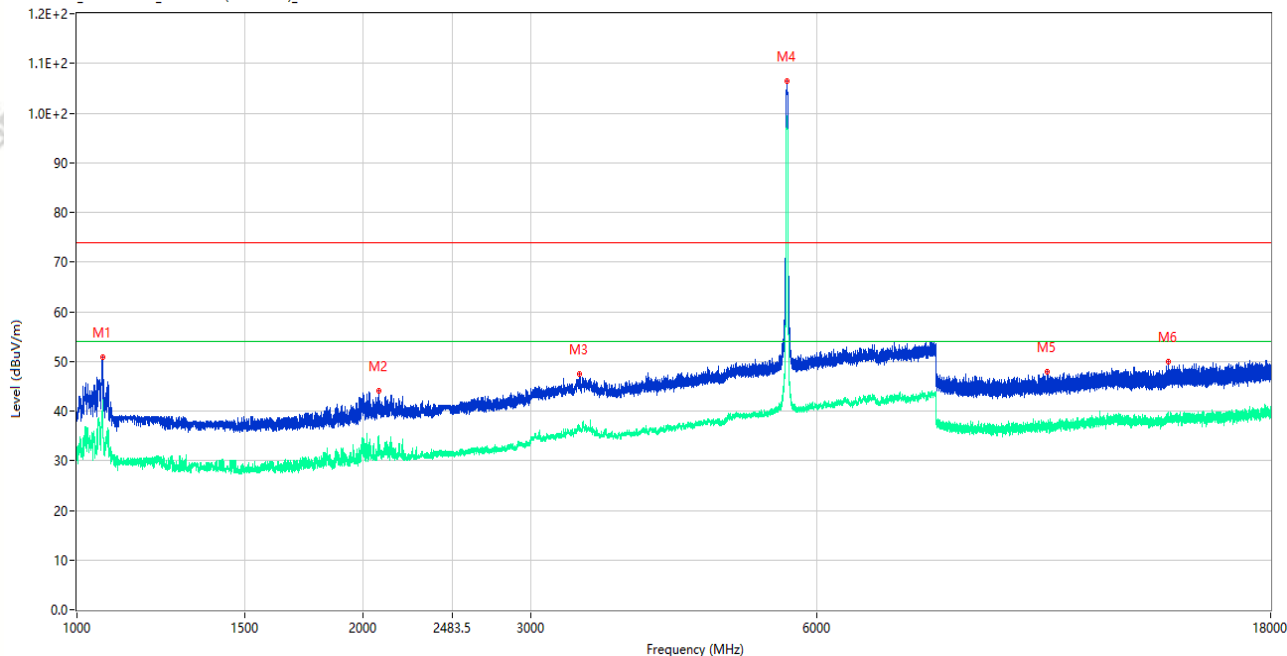

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1063.250	50.79	-15.23	74.0	23.21	Peak	163.00	150	Horizontal	Pass
1**	1063.250	40.91	-15.23	54.0	13.09	AV	163.00	150	Horizontal	Pass
2	2075.000	44.00	-13.78	74.0	30.00	Peak	146.00	150	Horizontal	Pass
2**	2075.000	33.58	-13.78	54.0	20.42	AV	146.00	150	Horizontal	Pass
3	3373.500	47.38	-4.79	74.0	26.62	Peak	360.00	150	Horizontal	Pass
3**	3373.500	36.56	-4.79	54.0	17.44	AV	360.00	150	Horizontal	Pass
4	5577.500	106.36	-2.89	74.0	-32.36	Peak	322.00	150	Horizontal	N/A
4**	5577.500	98.28	-2.89	54.0	-44.28	AV	322.00	150	Horizontal	N/A
5	10480.925	47.90	-3.44	74.0	26.10	Peak	98.00	150	Horizontal	Pass
5**	10480.925	36.75	-3.44	54.0	17.25	AV	98.00	150	Horizontal	Pass
6	14035.200	49.91	-1.84	74.0	24.09	Peak	111.00	150	Horizontal	Pass
6**	14035.200	39.18	-1.84	54.0	14.82	AV	111.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_02.19.01

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

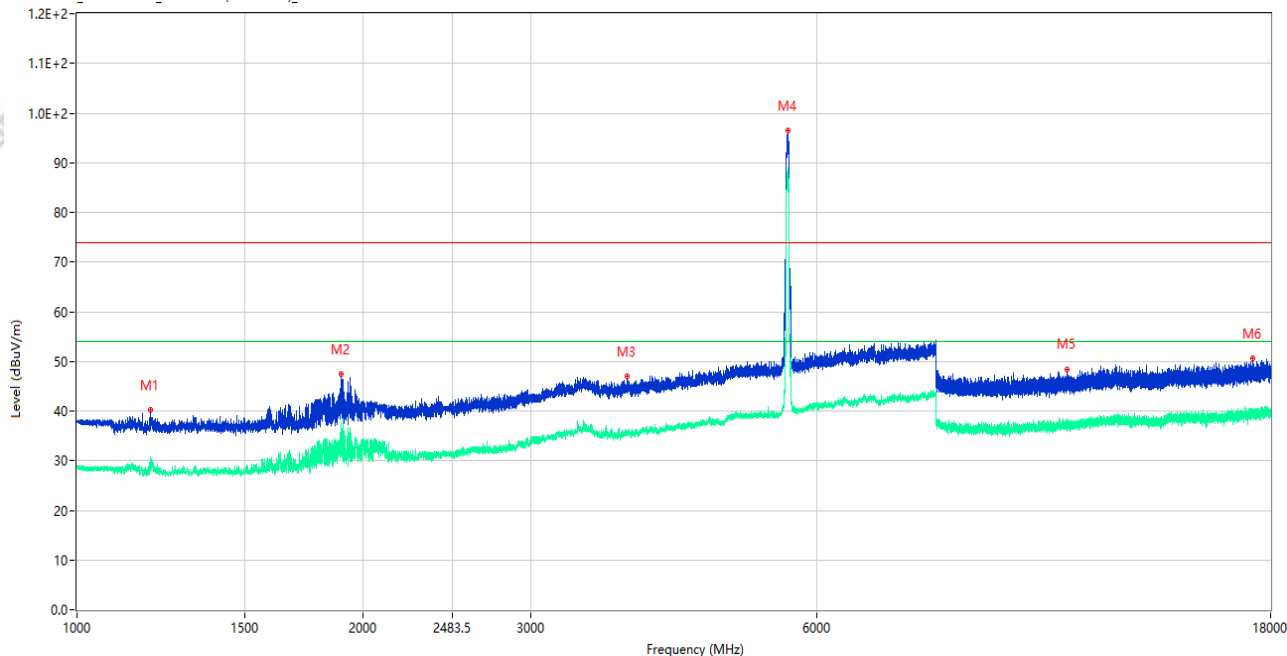

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1193.500	40.17	-15.79	74.0	33.83	Peak	140.00	150	Vertical	Pass
1**	1193.500	28.32	-15.79	54.0	25.68	AV	140.00	150	Vertical	Pass
2	1895.750	47.47	-15.46	74.0	26.53	Peak	118.00	150	Vertical	Pass
2**	1895.750	33.44	-15.46	54.0	20.56	AV	118.00	150	Vertical	Pass
3	3789.500	47.10	-5.26	74.0	26.90	Peak	139.00	150	Vertical	Pass
3**	3789.500	35.72	-5.26	54.0	18.28	AV	139.00	150	Vertical	Pass
4	5588.500	96.47	-2.79	74.0	-22.47	Peak	50.00	150	Vertical	N/A
4**	5588.500	89.10	-2.79	54.0	-35.10	AV	50.00	150	Vertical	N/A
5	10994.875	48.47	-2.86	74.0	25.53	Peak	212.00	150	Vertical	Pass
5**	10994.875	36.98	-2.86	54.0	17.02	AV	212.00	150	Vertical	Pass
6	17233.762	50.57	-0.47	74.0	23.43	Peak	312.00	150	Vertical	Pass
6**	17233.762	39.83	-0.47	54.0	14.17	AV	312.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_02.14.50

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

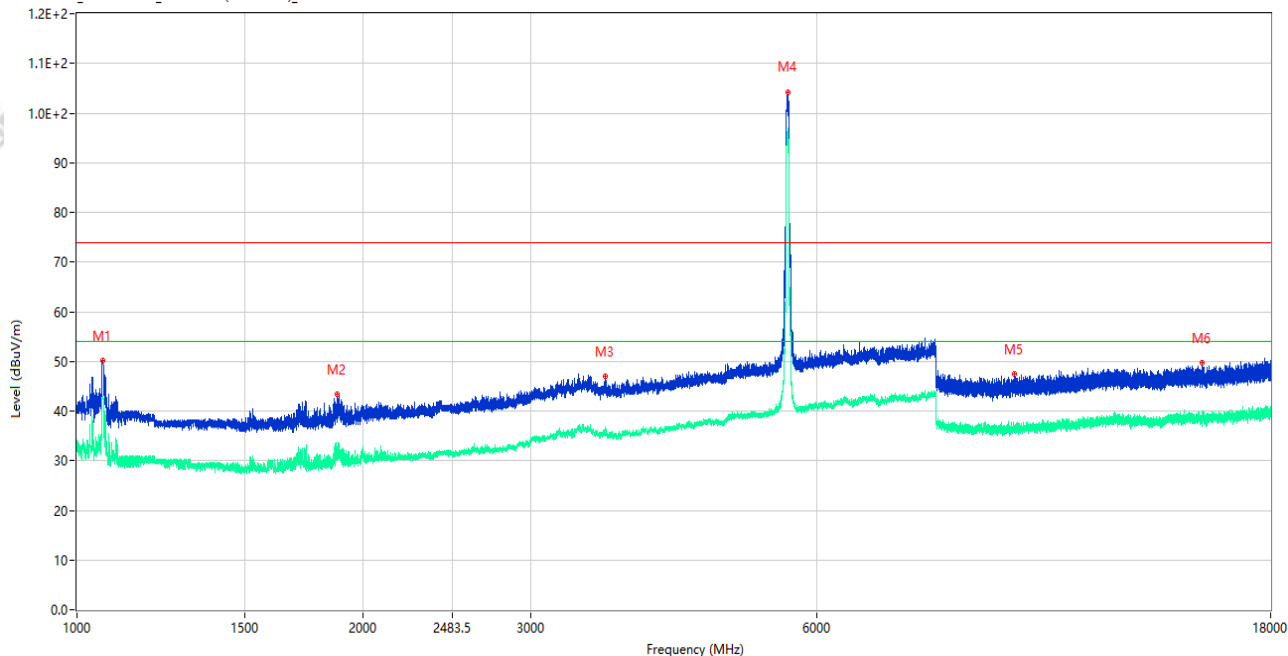

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1063.750	50.21	-15.22	74.0	23.79	Peak	125.00	150	Horizontal	Pass
1**	1063.750	42.72	-15.22	54.0	11.28	AV	125.00	150	Horizontal	Pass
2	1876.750	43.33	-15.46	74.0	30.67	Peak	0.00	150	Horizontal	Pass
2**	1876.750	31.34	-15.46	54.0	22.66	AV	0.00	150	Horizontal	Pass
3	3598.000	47.03	-5.09	74.0	26.97	Peak	324.00	150	Horizontal	Pass
3**	3598.000	36.81	-5.09	54.0	17.19	AV	324.00	150	Horizontal	Pass
4	5588.500	104.29	-2.79	74.0	-30.29	Peak	304.00	150	Horizontal	N/A
4**	5588.500	96.96	-2.79	54.0	-42.96	AV	304.00	150	Horizontal	N/A
5	9685.063	47.46	-3.74	74.0	26.54	Peak	117.00	150	Horizontal	Pass
5**	9685.063	36.33	-3.74	54.0	17.67	AV	117.00	150	Horizontal	Pass
6	15261.862	49.78	-1.08	74.0	24.22	Peak	279.00	150	Horizontal	Pass
6**	15261.862	39.31	-1.08	54.0	14.69	AV	279.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_02:57:58

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

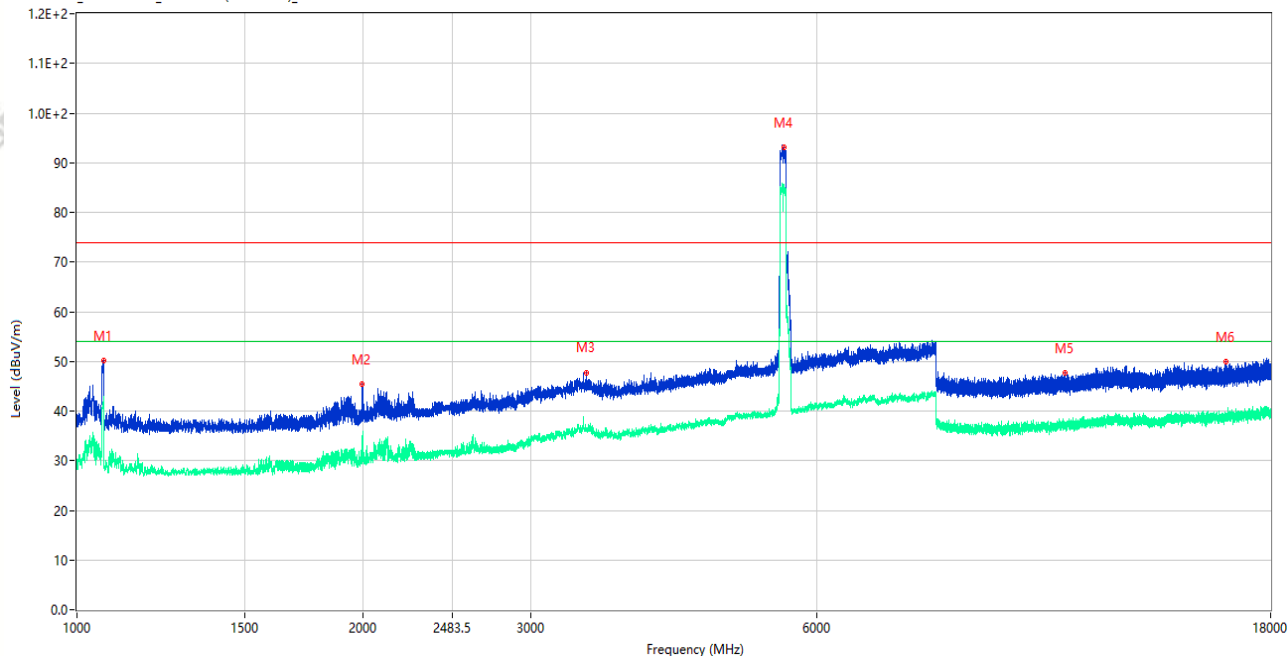

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1066.000	50.16	-15.14	74.0	23.84	Peak	108.00	150	Vertical	Pass
1**	1066.000	43.01	-15.14	54.0	10.99	AV	108.00	150	Vertical	Pass
2	1995.250	45.42	-14.53	74.0	28.58	Peak	95.00	150	Vertical	Pass
2**	1995.250	34.75	-14.53	54.0	19.25	AV	95.00	150	Vertical	Pass
3	3431.000	47.59	-5.03	74.0	26.41	Peak	15.00	150	Vertical	Pass
3**	3431.000	36.46	-5.03	54.0	17.54	AV	15.00	150	Vertical	Pass
4	5534.500	93.16	-2.60	74.0	-19.16	Peak	15.00	150	Vertical	N/A
4**	5534.500	85.74	-2.60	54.0	-31.74	AV	15.00	150	Vertical	N/A
5	10942.387	47.71	-3.27	74.0	26.29	Peak	120.00	150	Vertical	Pass
5**	10942.387	37.32	-3.27	54.0	16.68	AV	120.00	150	Vertical	Pass
6	16137.562	49.84	-1.39	74.0	24.16	Peak	360.00	150	Vertical	Pass
6**	16137.562	39.61	-1.39	54.0	14.39	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_02.53.22

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

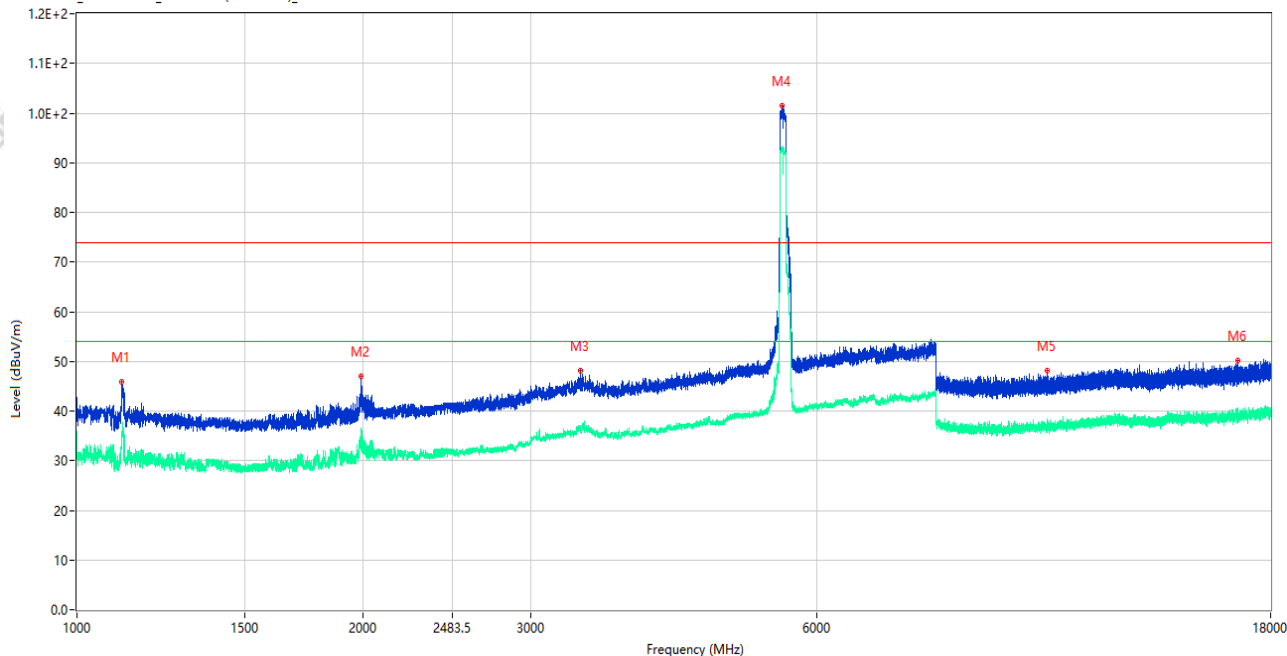

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1114.250	45.82	-15.77	74.0	28.18	Peak	169.00	150	Horizontal	Pass
1**	1114.250	34.21	-15.77	54.0	19.79	AV	169.00	150	Horizontal	Pass
2	1990.000	46.92	-14.76	74.0	27.08	Peak	166.00	150	Horizontal	Pass
2**	1990.000	32.12	-14.76	54.0	21.88	AV	166.00	150	Horizontal	Pass
3	3382.000	48.13	-5.22	74.0	25.87	Peak	165.00	150	Horizontal	Pass
3**	3382.000	36.58	-5.22	54.0	17.42	AV	165.00	150	Horizontal	Pass
4	5517.500	101.40	-2.55	74.0	-27.40	Peak	300.00	150	Horizontal	N/A
4**	5517.500	92.60	-2.55	54.0	-38.60	AV	300.00	150	Horizontal	N/A
5	10478.312	48.15	-3.39	74.0	25.85	Peak	191.00	150	Horizontal	Pass
5**	10478.312	38.51	-3.39	54.0	15.49	AV	191.00	150	Horizontal	Pass
6	16637.100	50.17	-1.13	74.0	23.83	Peak	279.00	150	Horizontal	Pass
6**	16637.100	38.97	-1.13	54.0	15.03	AV	279.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_03.03.40

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax20 CH116

P=15.5

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45

ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

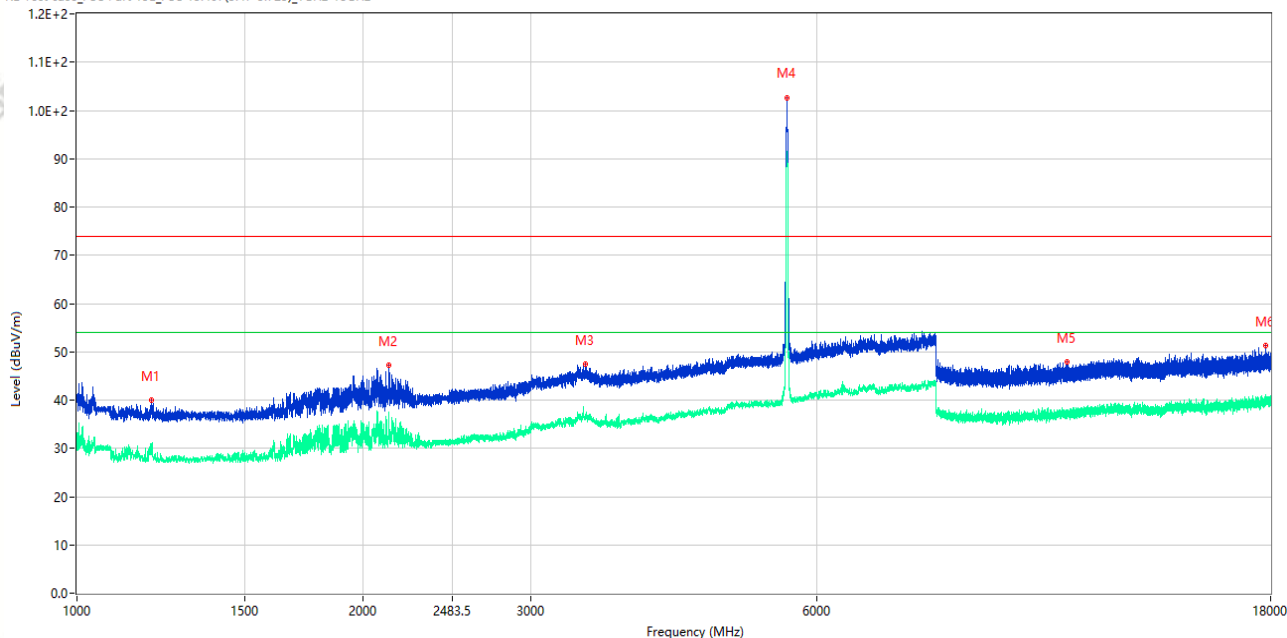

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.500	40.10	-15.75	74.0	33.90	Peak	132.00	150	Vertical	Pass
1**	1198.500	28.96	-15.75	54.0	25.04	AV	132.00	150	Vertical	Pass
2	2128.500	47.28	-13.25	74.0	26.72	Peak	111.00	150	Vertical	Pass
2**	2128.500	35.88	-13.25	54.0	18.12	AV	111.00	150	Vertical	Pass
3	3428.000	47.46	-4.91	74.0	26.54	Peak	101.00	150	Vertical	Pass
3**	3428.000	36.85	-4.91	54.0	17.15	AV	101.00	150	Vertical	Pass
4	5579.000	102.69	-2.87	74.0	-28.69	Peak	53.00	150	Vertical	N/A
4**	5579.000	91.44	-2.87	54.0	-37.44	AV	53.00	150	Vertical	N/A
5	11004.849	47.80	-2.99	74.0	26.20	Peak	283.00	150	Vertical	Pass
5**	11004.849	37.70	-2.99	54.0	16.30	AV	283.00	150	Vertical	Pass
6	17796.037	51.29	1.47	74.0	22.71	Peak	360.00	150	Vertical	Pass
6**	17796.037	40.56	1.47	54.0	13.44	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_03.08.15

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax20 CH116

P=15.5

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45

ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

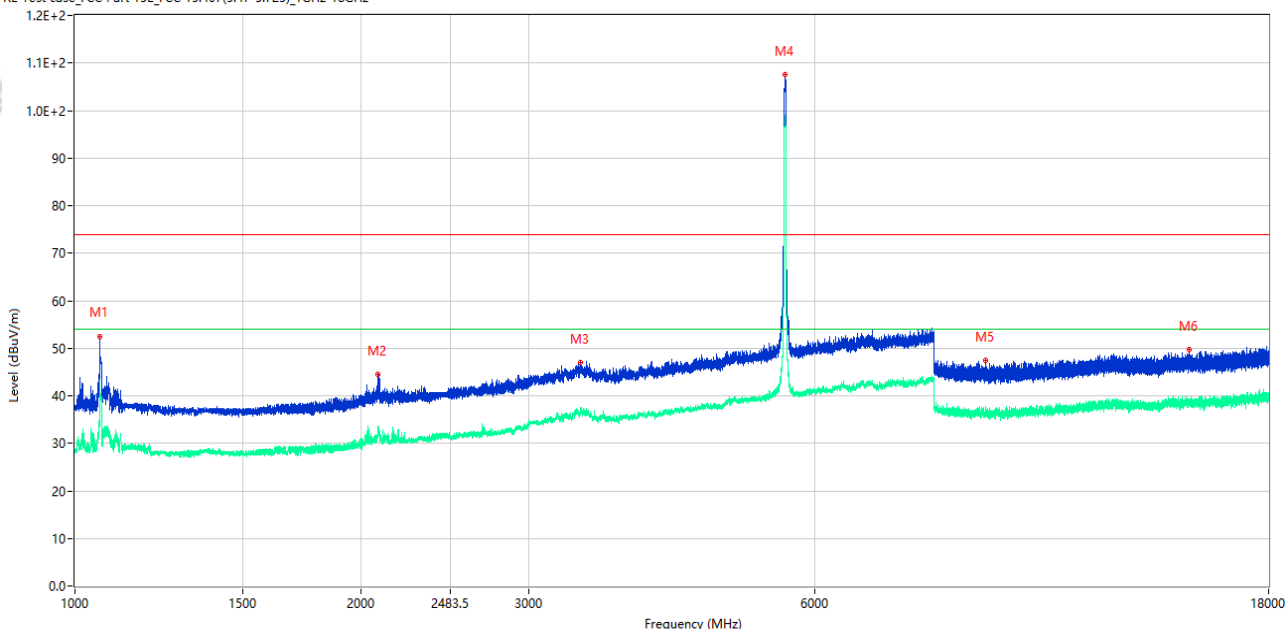

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1061.750	52.54	-15.26	74.0	21.46	Peak	164.00	150	Horizontal	Pass
1**	1061.750	40.31	-15.26	54.0	13.69	AV	164.00	150	Horizontal	Pass
2	2082.000	44.49	-13.80	74.0	29.51	Peak	147.00	150	Horizontal	Pass
2**	2082.000	33.19	-13.80	54.0	20.81	AV	147.00	150	Horizontal	Pass
3	3404.500	46.99	-5.48	74.0	27.01	Peak	196.00	150	Horizontal	Pass
3**	3404.500	36.61	-5.48	54.0	17.39	AV	196.00	150	Horizontal	Pass
4	5580.500	107.54	-2.85	74.0	-33.54	Peak	321.00	150	Horizontal	N/A
4**	5580.500	98.73	-2.85	54.0	-44.73	AV	321.00	150	Horizontal	N/A
5	9065.425	47.49	-4.61	74.0	26.51	Peak	261.00	150	Horizontal	Pass
5**	9065.425	36.38	-4.61	54.0	17.62	AV	261.00	150	Horizontal	Pass
6	14837.137	49.76	-0.25	74.0	24.24	Peak	245.00	150	Horizontal	Pass
6**	14837.137	39.06	-0.25	54.0	14.94	AV	245.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_03.50.48

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax40 CH118 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

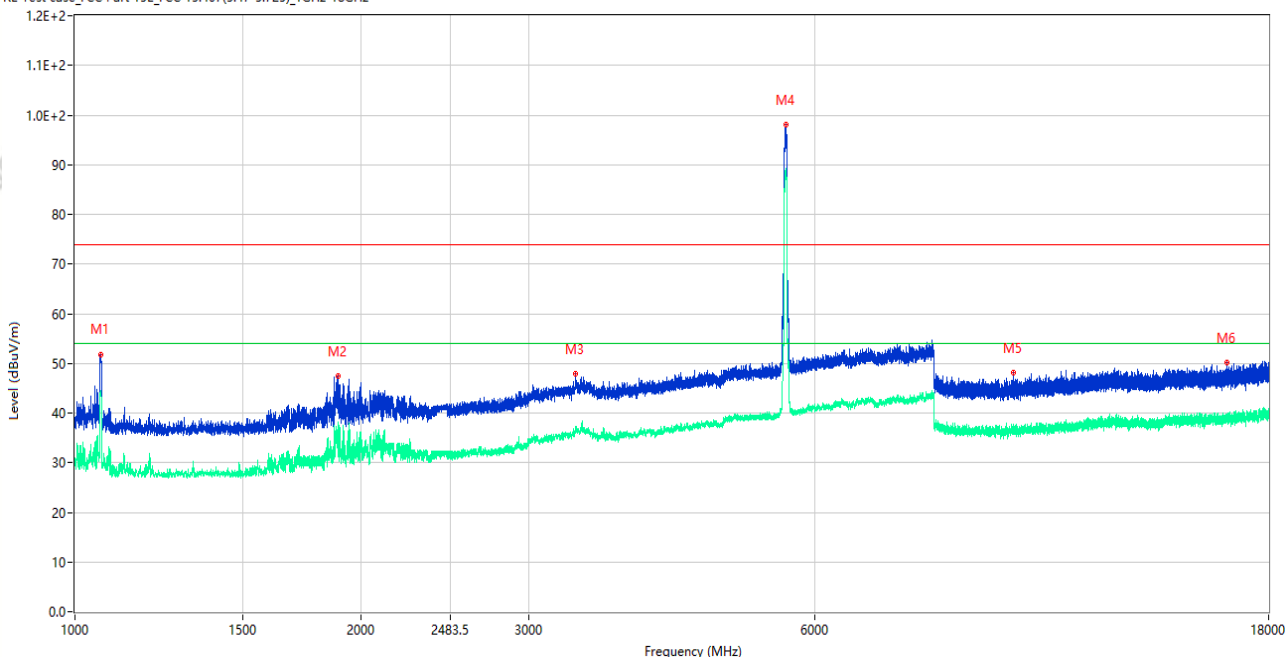

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1064.000	51.85	-15.22	74.0	22.15	Peak	108.00	150	Vertical	Pass
1**	1064.000	44.56	-15.22	54.0	9.44	AV	108.00	150	Vertical	Pass
2	1892.500	47.47	-15.40	74.0	26.53	Peak	121.00	150	Vertical	Pass
2**	1892.500	35.81	-15.40	54.0	18.19	AV	121.00	150	Vertical	Pass
3	3363.500	47.93	-5.35	74.0	26.07	Peak	37.00	150	Vertical	Pass
3**	3363.500	37.15	-5.35	54.0	16.85	AV	37.00	150	Vertical	Pass
4	5587.500	98.05	-2.84	74.0	-24.05	Peak	96.00	150	Vertical	N/A
4**	5587.500	88.94	-2.84	54.0	-34.94	AV	96.00	150	Vertical	N/A
5	9703.113	48.10	-3.46	74.0	25.90	Peak	237.00	150	Vertical	Pass
5**	9703.113	36.93	-3.46	54.0	17.07	AV	237.00	150	Vertical	Pass
6	16284.826	50.07	-1.44	74.0	23.93	Peak	360.00	150	Vertical	Pass
6**	16284.826	39.59	-1.44	54.0	14.41	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_03.55.00

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax40 CH118 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

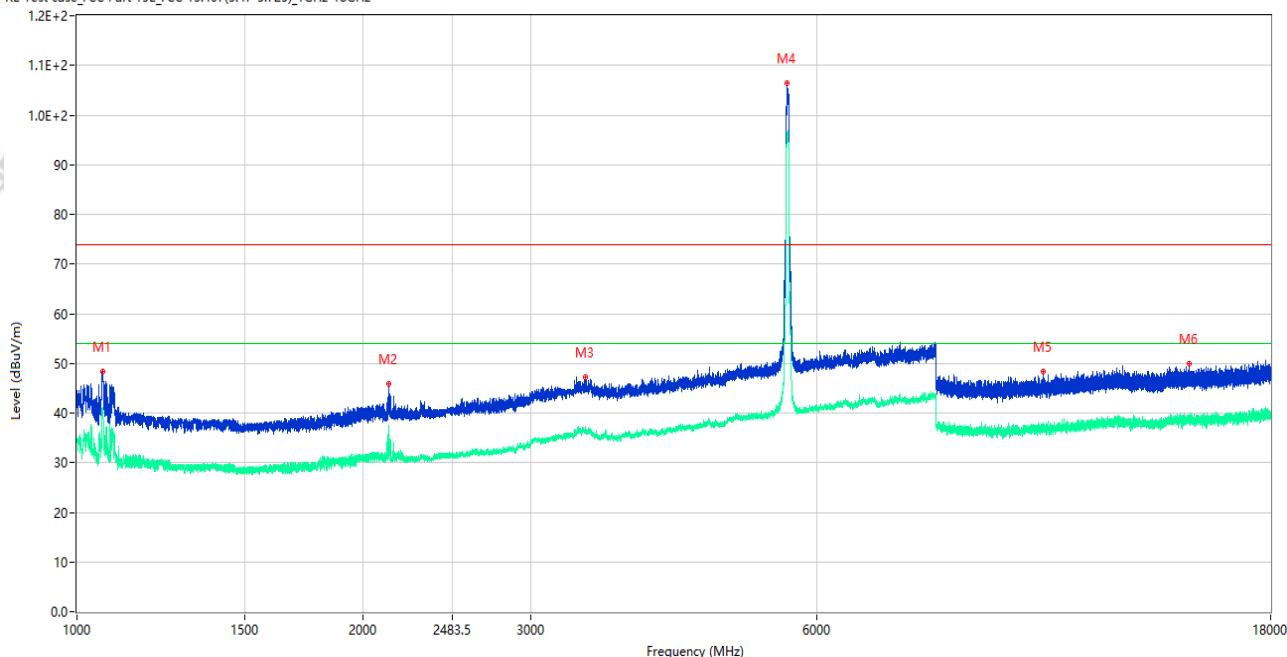

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1063.750	48.36	-15.22	74.0	25.64	Peak	65.00	150	Horizontal	Pass
1**	1063.750	40.98	-15.22	54.0	13.02	AV	65.00	150	Horizontal	Pass
2	2129.000	45.86	-13.26	74.0	28.14	Peak	150.00	150	Horizontal	Pass
2**	2129.000	36.56	-13.26	54.0	17.44	AV	150.00	150	Horizontal	Pass
3	3427.500	47.21	-4.93	74.0	26.79	Peak	360.00	150	Horizontal	Pass
3**	3427.500	36.87	-4.93	54.0	17.13	AV	360.00	150	Horizontal	Pass
4	5586.500	106.35	-2.81	74.0	-32.35	Peak	322.00	150	Horizontal	N/A
4**	5586.500	96.16	-2.81	54.0	-42.16	AV	322.00	150	Horizontal	N/A
5	10389.963	48.34	-3.33	74.0	25.66	Peak	51.00	150	Horizontal	Pass
5**	10389.963	37.44	-3.33	54.0	16.56	AV	51.00	150	Horizontal	Pass
6	14777.813	49.88	-0.88	74.0	24.12	Peak	179.00	150	Horizontal	Pass
6**	14777.813	39.71	-0.88	54.0	14.29	AV	179.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_04.05.16

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

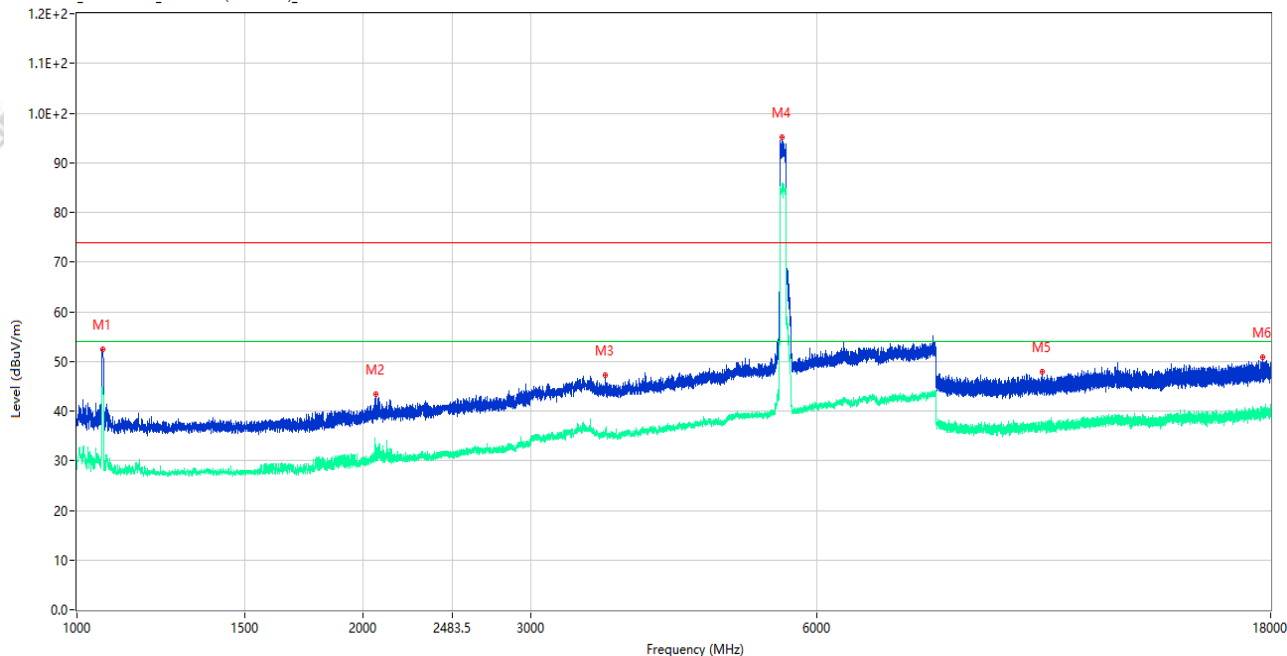

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1064.500	52.48	-15.20	74.0	21.52	Peak	156.00	150	Vertical	Pass
1**	1064.500	44.17	-15.20	54.0	9.83	AV	156.00	150	Vertical	Pass
2	2064.000	43.45	-13.83	74.0	30.55	Peak	124.00	150	Vertical	Pass
2**	2064.000	30.67	-13.83	54.0	23.33	AV	124.00	150	Vertical	Pass
3	3597.000	47.28	-5.11	74.0	26.72	Peak	360.00	150	Vertical	Pass
3**	3597.000	36.38	-5.11	54.0	17.62	AV	360.00	150	Vertical	Pass
4	5515.500	95.21	-2.54	74.0	-21.21	Peak	14.00	150	Vertical	N/A
4**	5515.500	85.08	-2.54	54.0	-31.08	AV	14.00	150	Vertical	N/A
5	10364.075	47.91	-3.17	74.0	26.09	Peak	329.00	150	Vertical	Pass
5**	10364.075	37.20	-3.17	54.0	16.80	AV	329.00	150	Vertical	Pass
6	17662.687	50.79	0.54	74.0	23.21	Peak	14.00	150	Vertical	Pass
6**	17662.687	40.03	0.54	54.0	13.97	AV	14.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_04.00.46

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

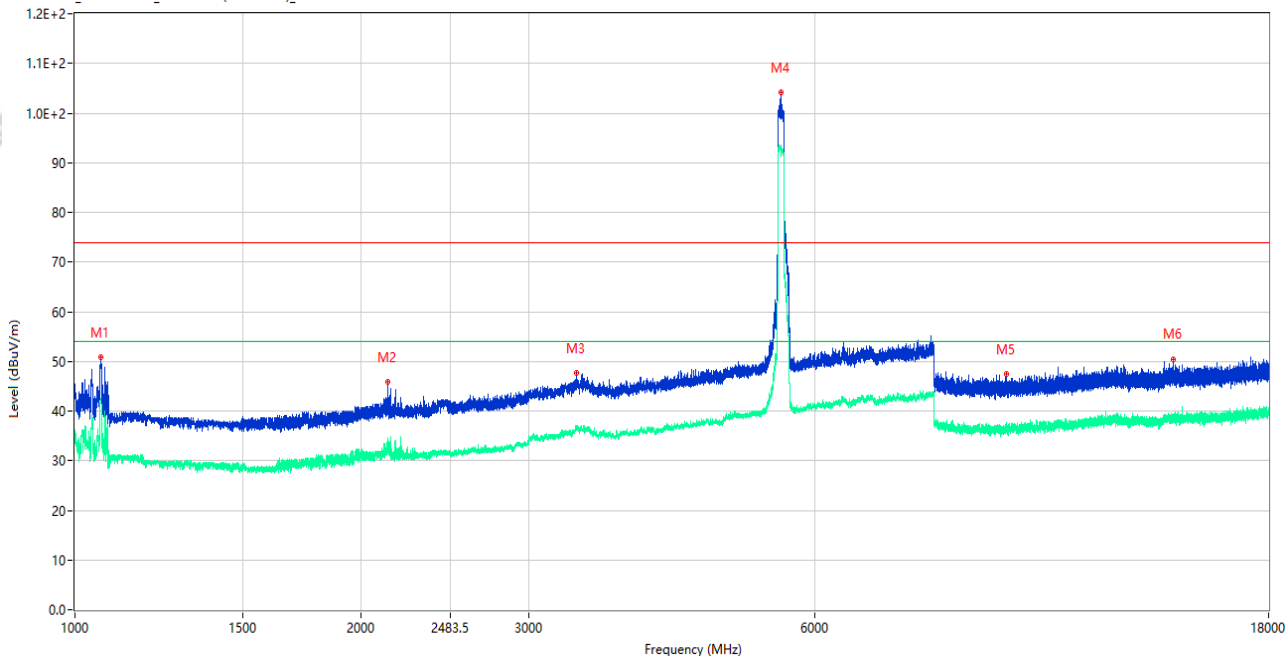

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1065.000	50.91	-15.18	74.0	23.09	Peak	111.00	150	Horizontal	Pass
1**	1065.000	41.73	-15.18	54.0	12.27	AV	111.00	150	Horizontal	Pass
2	2133.250	45.89	-13.38	74.0	28.11	Peak	147.00	150	Horizontal	Pass
2**	2133.250	33.70	-13.38	54.0	20.30	AV	147.00	150	Horizontal	Pass
3	3365.500	47.57	-5.13	74.0	26.43	Peak	360.00	150	Horizontal	Pass
3**	3365.500	37.11	-5.13	54.0	16.89	AV	360.00	150	Horizontal	Pass
4	5527.500	104.11	-2.43	74.0	-30.11	Peak	329.00	150	Horizontal	N/A
4**	5527.500	93.13	-2.43	54.0	-39.13	AV	329.00	150	Horizontal	N/A
5	9544.700	47.39	-2.65	74.0	26.61	Peak	144.00	150	Horizontal	Pass
5**	9544.700	37.82	-2.65	54.0	16.18	AV	144.00	150	Horizontal	Pass
6	14290.088	50.49	-2.77	74.0	23.51	Peak	360.00	150	Horizontal	Pass
6**	14290.088	38.19	-2.77	54.0	15.81	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_11.32.41

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

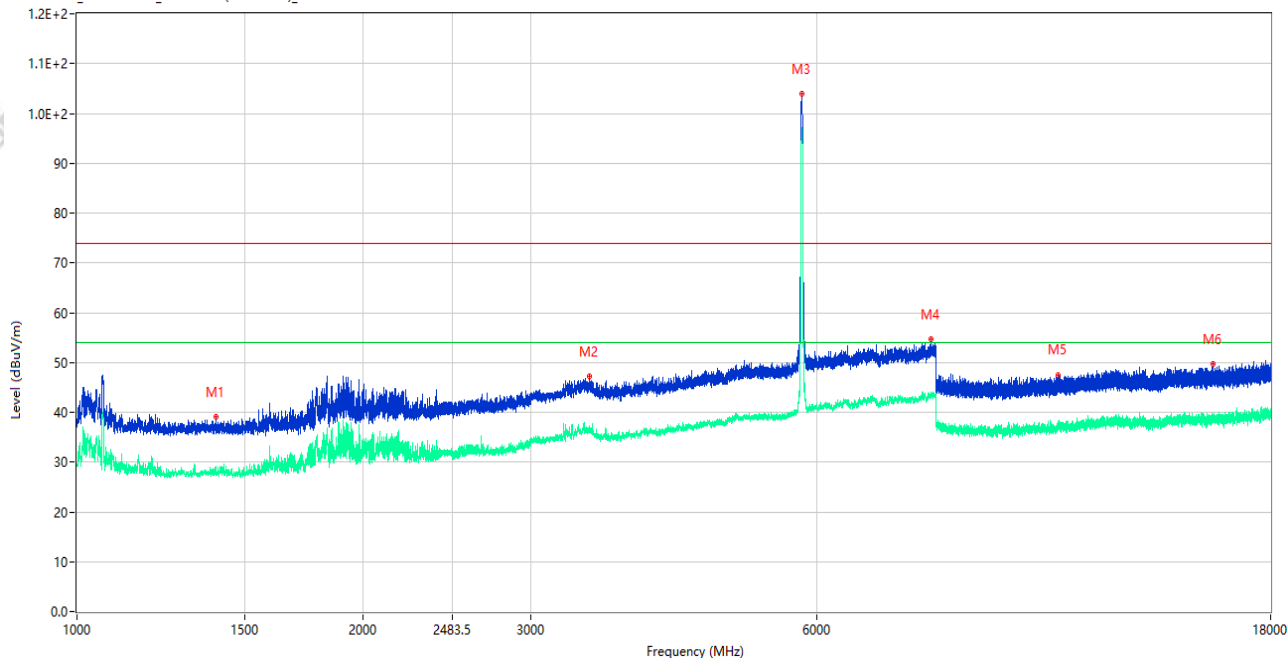

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1400.250	39.07	-15.98	74.0	34.93	Peak	331.00	150	Vertical	Pass
1**	1400.250	27.45	-15.98	54.0	26.55	AV	331.00	150	Vertical	Pass
2	3455.000	47.24	-4.90	74.0	26.76	Peak	0.00	150	Vertical	Pass
2**	3455.000	37.30	-4.90	54.0	16.70	AV	0.00	150	Vertical	Pass
3	5784.000	104.02	-1.54	74.0	-30.02	Peak	157.00	150	Vertical	N/A
3**	5784.000	96.53	-1.54	54.0	-42.53	AV	157.00	150	Vertical	N/A
4	7913.000	54.73	1.74	74.0	19.27	Peak	206.00	150	Vertical	Pass
4**	7913.000	43.52	1.74	54.0	10.48	AV	206.00	150	Vertical	Pass
5	10749.776	47.47	-3.36	74.0	26.53	Peak	147.00	150	Vertical	Pass
5**	10749.776	37.24	-3.36	54.0	16.76	AV	147.00	150	Vertical	Pass
6	15654.825	49.68	-1.55	74.0	24.32	Peak	115.00	150	Vertical	Pass
6**	15654.825	38.21	-1.55	54.0	15.79	AV	115.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_11.36.39

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

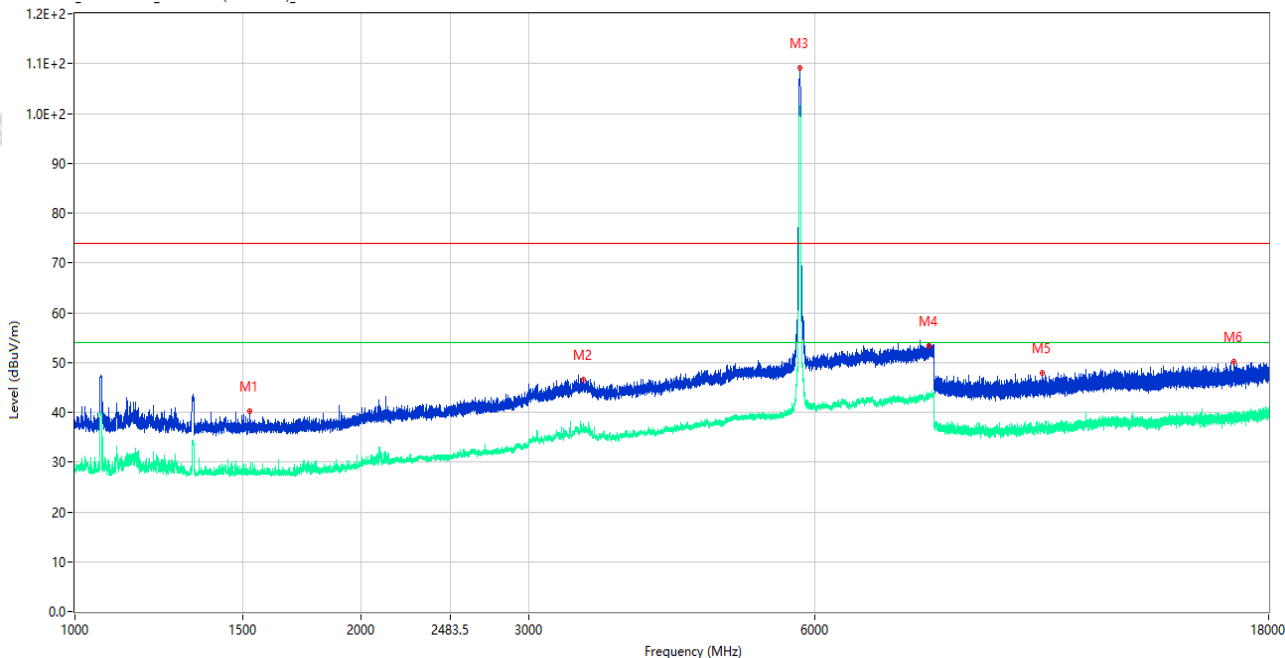

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1528.500	40.25	-16.07	74.0	33.75	Peak	160.00	150	Horizontal	Pass
1**	1528.500	27.55	-16.07	54.0	26.45	AV	160.00	150	Horizontal	Pass
2	3424.500	46.46	-4.92	74.0	27.54	Peak	4.00	150	Horizontal	Pass
2**	3424.500	37.67	-4.92	54.0	16.33	AV	4.00	150	Horizontal	Pass
3	5784.000	107.30	-1.54	74.0	-33.30	Peak	0.00	150	Horizontal	N/A
3**	5784.000	99.92	-1.54	54.0	-45.92	AV	0.00	150	Horizontal	N/A
4	7908.500	53.37	1.57	74.0	20.63	Peak	48.00	150	Horizontal	Pass
4**	7908.500	42.85	1.57	54.0	11.15	AV	48.00	150	Horizontal	Pass
5	10405.875	47.95	-3.29	74.0	26.05	Peak	360.00	150	Horizontal	Pass
5**	10405.875	36.94	-3.29	54.0	17.06	AV	360.00	150	Horizontal	Pass
6	16553.887	50.15	-0.87	74.0	23.85	Peak	14.00	150	Horizontal	Pass
6**	16553.887	38.96	-0.87	54.0	15.04	AV	14.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_11.49.41

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

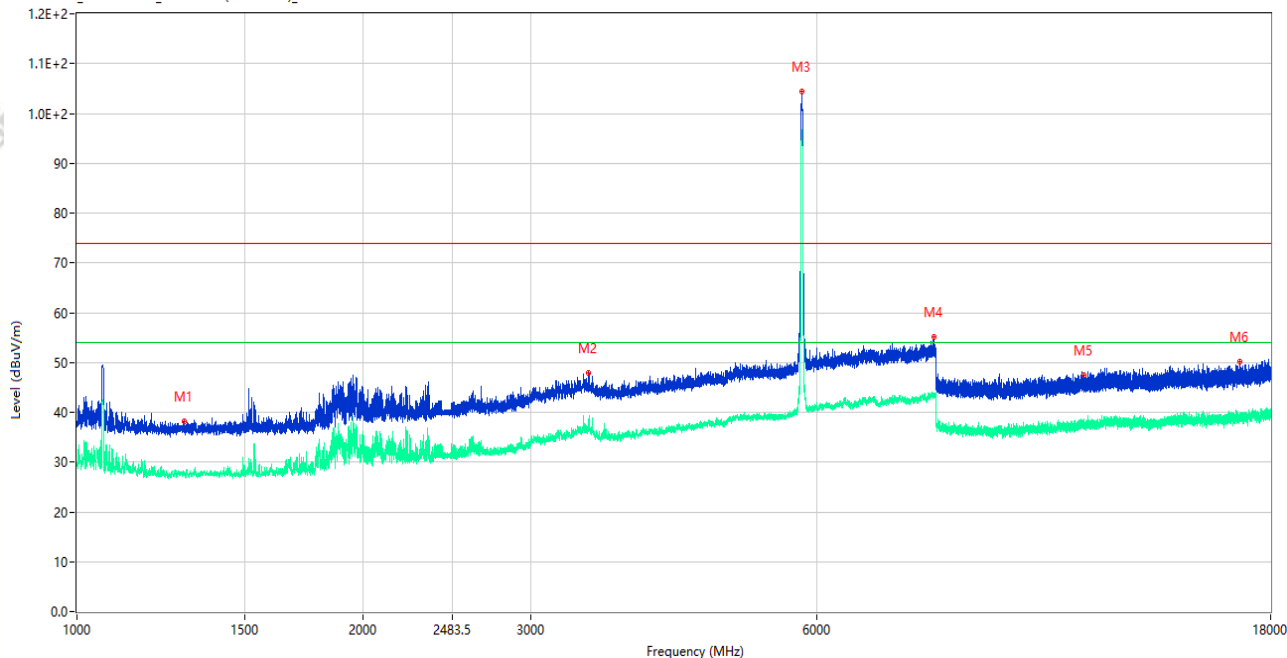

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1296.750	38.23	-15.68	74.0	35.77	Peak	138.00	150	Vertical	Pass
1**	1296.750	27.76	-15.68	54.0	26.24	AV	138.00	150	Vertical	Pass
2	3454.000	47.80	-4.93	74.0	26.20	Peak	274.00	150	Vertical	Pass
2**	3454.000	38.25	-4.93	54.0	15.75	AV	274.00	150	Vertical	Pass
3	5784.000	104.33	-1.54	74.0	-30.33	Peak	166.00	150	Vertical	N/A
3**	5784.000	96.68	-1.54	54.0	-42.68	AV	166.00	150	Vertical	N/A
4	7958.500	55.09	2.32	74.0	18.91	Peak	348.00	150	Vertical	Pass
4**	7958.500	43.86	2.32	54.0	10.14	AV	348.00	150	Vertical	Pass
5	11455.863	47.52	-3.09	74.0	26.48	Peak	354.00	150	Vertical	Pass
5**	11455.863	38.14	-3.09	54.0	15.86	AV	354.00	150	Vertical	Pass
6	16713.488	50.24	-1.63	74.0	23.76	Peak	48.00	150	Vertical	Pass
6**	16713.488	39.02	-1.63	54.0	14.98	AV	48.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_13.44.40

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

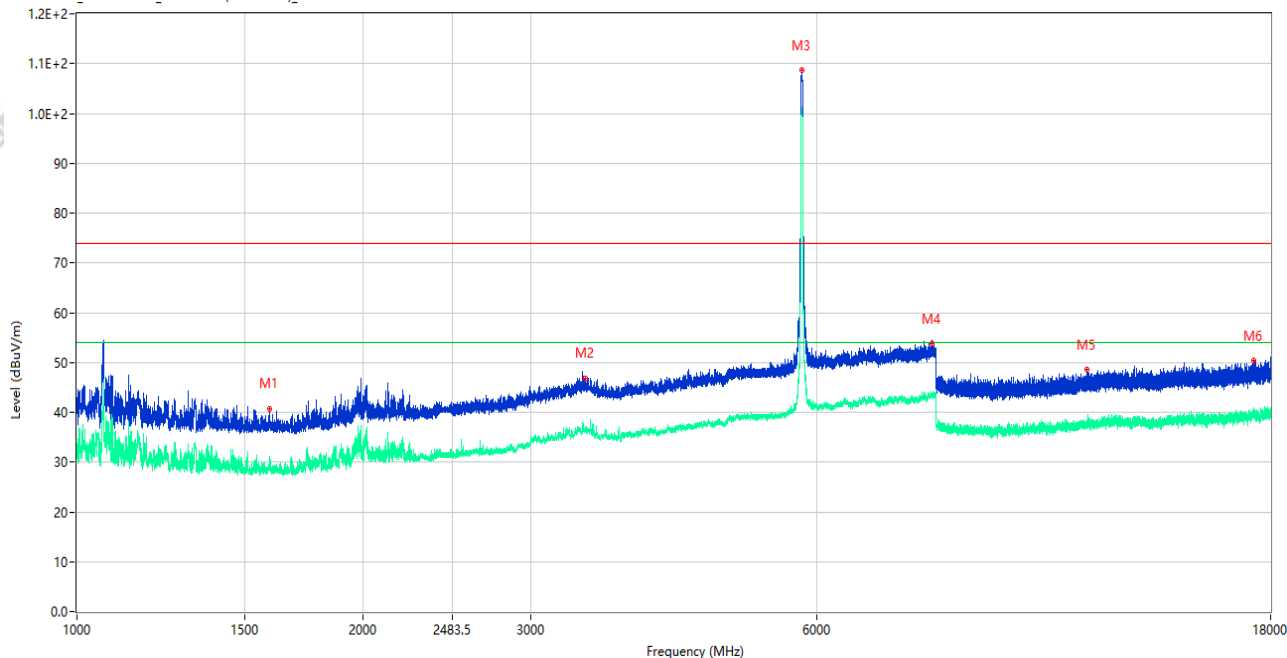

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1593.000	40.66	-16.21	74.0	33.34	Peak	149.00	150	Horizontal	Pass
1**	1593.000	28.96	-16.21	54.0	25.04	AV	149.00	150	Horizontal	Pass
2	3423.000	46.82	-4.91	74.0	27.18	Peak	100.00	150	Horizontal	Pass
2**	3423.000	35.93	-4.91	54.0	18.07	AV	100.00	150	Horizontal	Pass
3	5786.500	107.51	-1.53	74.0	-33.51	Peak	0.00	150	Horizontal	N/A
3**	5786.500	99.72	-1.53	54.0	-45.72	AV	0.00	150	Horizontal	N/A
4	7930.000	53.86	2.03	74.0	20.14	Peak	80.00	150	Horizontal	Pass
4**	7930.000	43.59	2.03	54.0	10.41	AV	80.00	150	Horizontal	Pass
5	11531.150	48.52	-2.69	74.0	25.48	Peak	354.00	150	Horizontal	Pass
5**	11531.150	37.60	-2.69	54.0	16.40	AV	354.00	150	Horizontal	Pass
6	17278.913	50.32	-1.06	74.0	23.68	Peak	0.00	150	Horizontal	Pass
6**	17278.913	39.39	-1.06	54.0	14.61	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_18.41.18

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

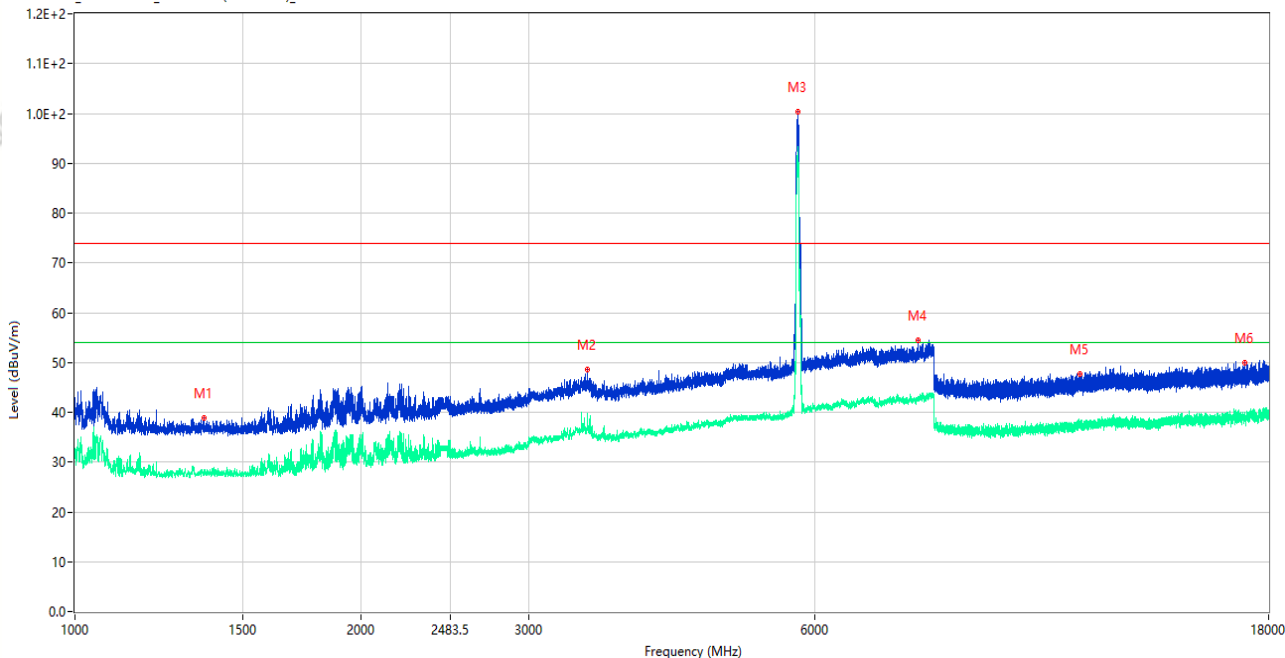

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1368.250	38.83	-15.90	74.0	35.17	Peak	90.00	150	Vertical	Pass
1**	1368.250	27.63	-15.90	54.0	26.37	AV	90.00	150	Vertical	Pass
2	3458.000	48.55	-4.93	74.0	25.45	Peak	193.00	150	Vertical	Pass
2**	3458.000	36.89	-4.93	54.0	17.11	AV	193.00	150	Vertical	Pass
3	5759.000	100.29	-1.96	74.0	-26.29	Peak	162.00	150	Vertical	N/A
3**	5759.000	92.27	-1.96	54.0	-38.27	AV	162.00	150	Vertical	N/A
4	7701.000	54.44	1.42	74.0	19.56	Peak	349.00	150	Vertical	Pass
4**	7701.000	43.08	1.42	54.0	10.92	AV	349.00	150	Vertical	Pass
5	11407.887	47.59	-3.45	74.0	26.41	Peak	0.00	150	Vertical	Pass
5**	11407.887	36.80	-3.45	54.0	17.20	AV	0.00	150	Vertical	Pass
6	17003.025	49.89	-1.14	74.0	24.11	Peak	248.00	150	Vertical	Pass
6**	17003.025	38.64	-1.14	54.0	15.36	AV	248.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_18.37.24

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

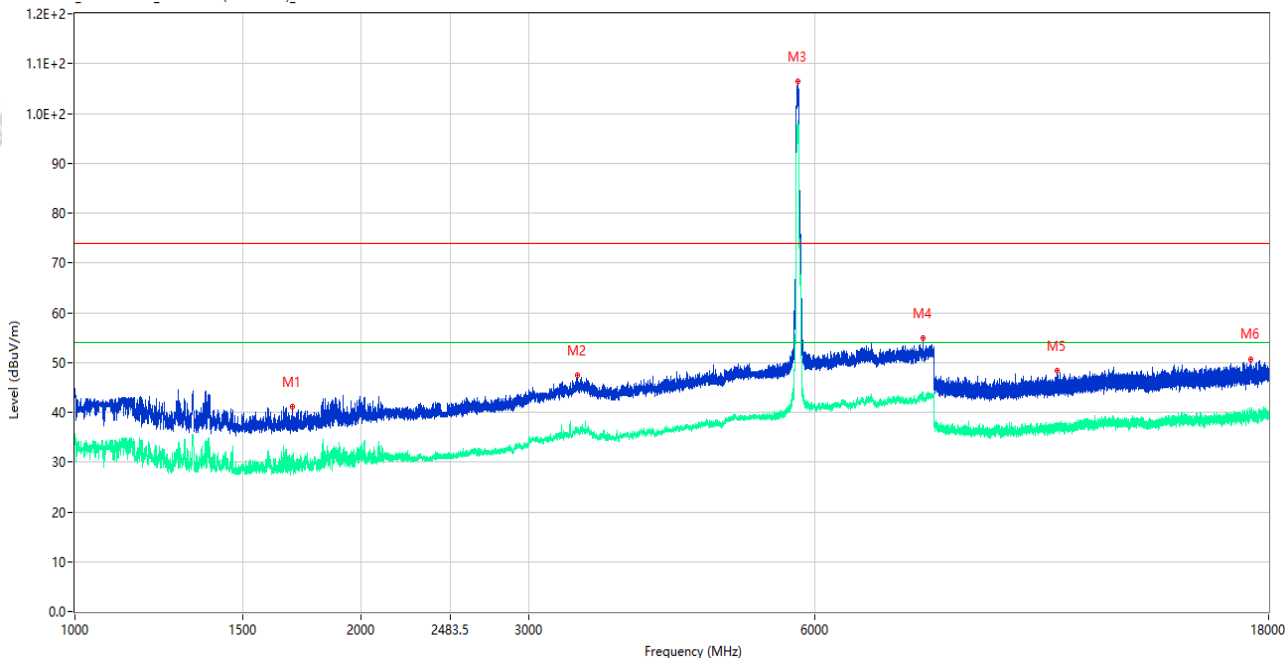

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1693.250	41.21	-16.50	74.0	32.79	Peak	130.00	150	Horizontal	Pass
1**	1693.250	31.27	-16.50	54.0	22.73	AV	130.00	150	Horizontal	Pass
2	3378.500	47.41	-5.02	74.0	26.59	Peak	1.00	150	Horizontal	Pass
2**	3378.500	35.99	-5.02	54.0	18.01	AV	1.00	150	Horizontal	Pass
3	5753.500	106.38	-2.09	74.0	-32.38	Peak	321.00	150	Horizontal	N/A
3**	5753.500	98.54	-2.09	54.0	-44.54	AV	321.00	150	Horizontal	N/A
4	7787.500	54.90	1.59	74.0	19.10	Peak	17.00	150	Horizontal	Pass
4**	7787.500	43.28	1.59	54.0	10.72	AV	17.00	150	Horizontal	Pass
5	10774.237	48.26	-3.03	74.0	25.74	Peak	143.00	150	Horizontal	Pass
5**	10774.237	37.16	-3.03	54.0	16.84	AV	143.00	150	Horizontal	Pass
6	17250.300	50.58	-0.58	74.0	23.42	Peak	278.00	150	Horizontal	Pass
6**	17250.300	39.67	-0.58	54.0	14.33	AV	278.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.12.41

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

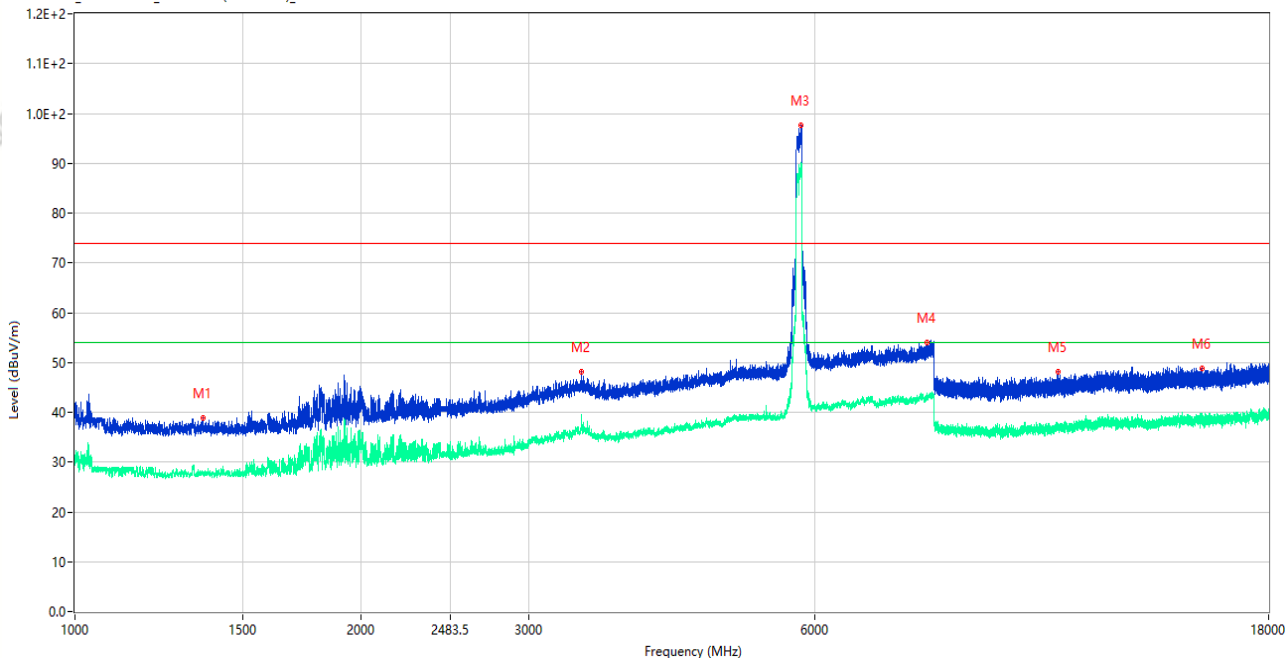

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1363.250	38.91	-15.84	74.0	35.09	Peak	252.00	150	Vertical	Pass
1**	1363.250	27.79	-15.84	54.0	26.21	AV	252.00	150	Vertical	Pass
2	3408.500	48.22	-5.36	74.0	25.78	Peak	63.00	150	Vertical	Pass
2**	3408.500	39.25	-5.36	54.0	14.75	AV	63.00	150	Vertical	Pass
3	5806.500	97.66	-1.37	74.0	-23.66	Peak	173.00	150	Vertical	N/A
3**	5806.500	90.24	-1.37	54.0	-36.24	AV	173.00	150	Vertical	N/A
4	7871.000	54.05	1.82	74.0	19.95	Peak	357.00	150	Vertical	Pass
4**	7871.000	43.17	1.82	54.0	10.83	AV	357.00	150	Vertical	Pass
5	10803.687	48.22	-3.19	74.0	25.78	Peak	0.00	150	Vertical	Pass
5**	10803.687	36.95	-3.19	54.0	17.05	AV	0.00	150	Vertical	Pass
6	15313.050	48.87	-2.08	74.0	25.13	Peak	360.00	150	Vertical	Pass
6**	15313.050	39.18	-2.08	54.0	14.82	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.08.48

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

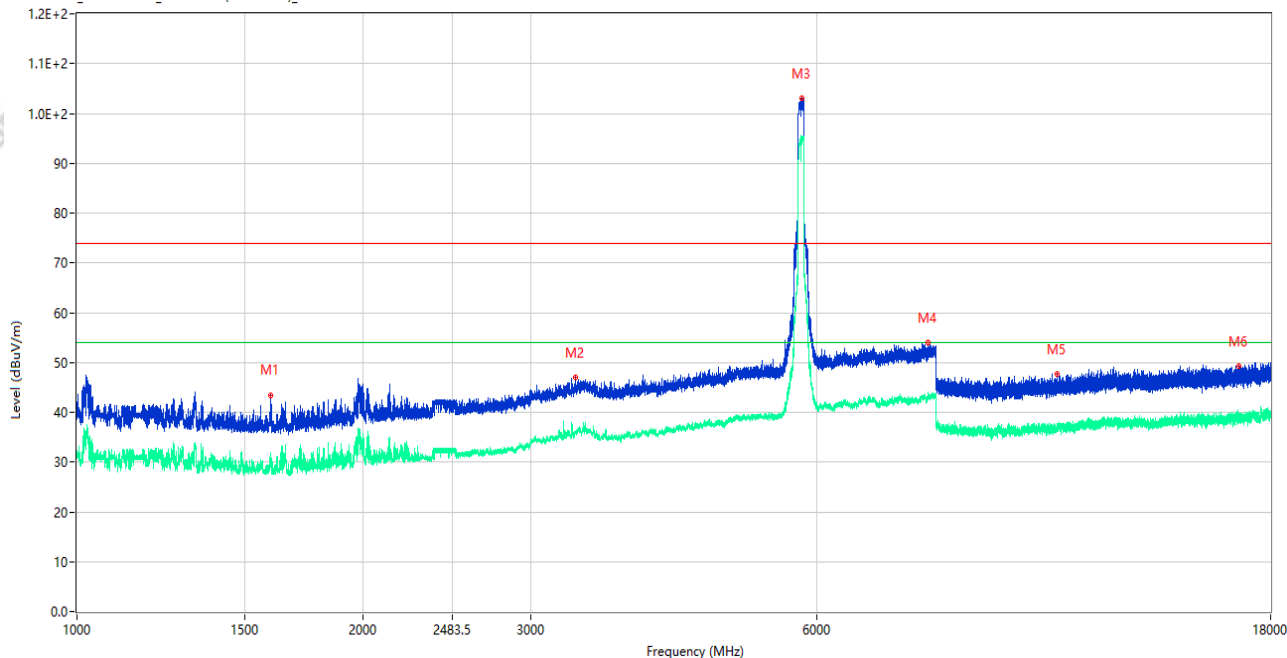

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1600.000	43.48	-16.24	74.0	30.52	Peak	185.00	150	Horizontal	Pass
1**	1600.000	30.50	-16.24	54.0	23.50	AV	185.00	150	Horizontal	Pass
2	3341.500	46.92	-6.00	74.0	27.08	Peak	310.00	150	Horizontal	Pass
2**	3341.500	36.26	-6.00	54.0	17.74	AV	310.00	150	Horizontal	Pass
3	5779.000	103.01	-1.52	74.0	-29.01	Peak	340.00	150	Horizontal	N/A
3**	5779.000	95.45	-1.52	54.0	-41.45	AV	340.00	150	Horizontal	N/A
4	7857.000	54.02	1.63	74.0	19.98	Peak	360.00	150	Horizontal	Pass
4**	7857.000	43.05	1.63	54.0	10.95	AV	360.00	150	Horizontal	Pass
5	10725.075	47.69	-3.75	74.0	26.31	Peak	143.00	150	Horizontal	Pass
5**	10725.075	36.72	-3.75	54.0	17.28	AV	143.00	150	Horizontal	Pass
6	16660.725	49.23	-1.45	74.0	24.77	Peak	312.00	150	Horizontal	Pass
6**	16660.725	38.37	-1.45	54.0	15.63	AV	312.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.17.07

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

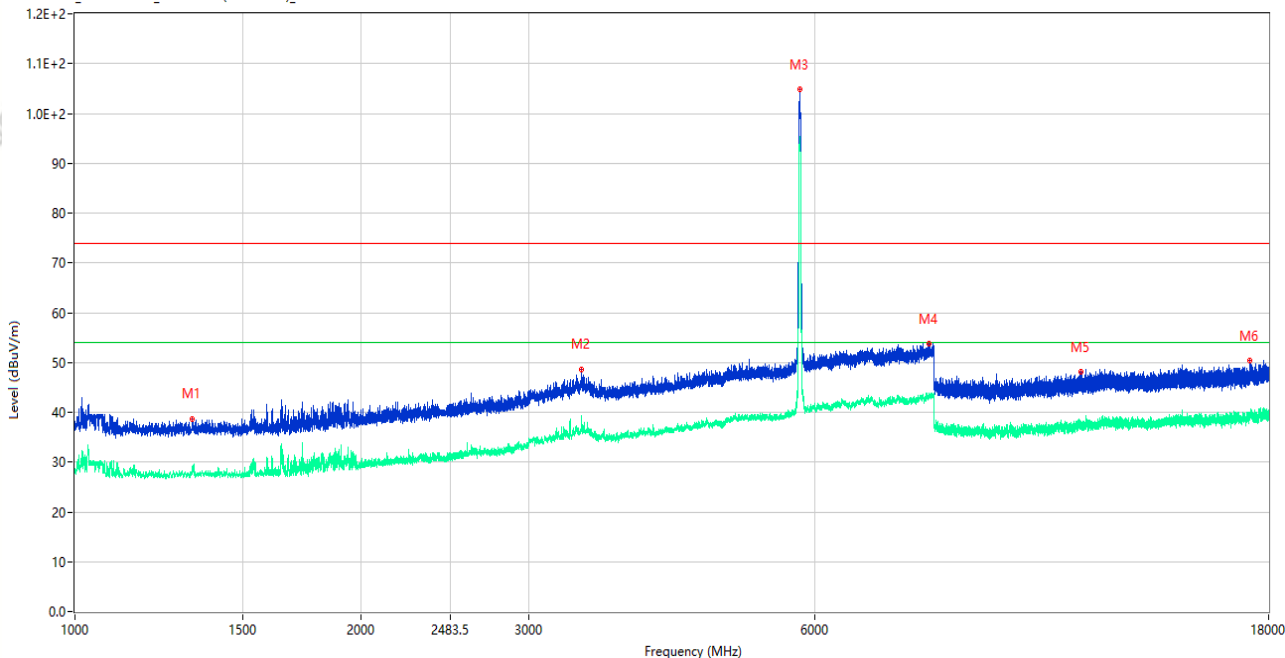

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.250	38.74	-15.91	74.0	35.26	Peak	124.00	150	Vertical	Pass
1**	1327.250	28.07	-15.91	54.0	25.93	AV	124.00	150	Vertical	Pass
2	3409.000	48.69	-5.35	74.0	25.31	Peak	360.00	150	Vertical	Pass
2**	3409.000	39.23	-5.35	54.0	14.77	AV	360.00	150	Vertical	Pass
3	5786.000	104.76	-1.53	74.0	-30.76	Peak	175.00	150	Vertical	N/A
3**	5786.000	94.67	-1.53	54.0	-40.67	AV	175.00	150	Vertical	N/A
4	7913.500	53.85	1.76	74.0	20.15	Peak	194.00	150	Vertical	Pass
4**	7913.500	43.04	1.76	54.0	10.96	AV	194.00	150	Vertical	Pass
5	11439.475	48.13	-3.27	74.0	25.87	Peak	75.00	150	Vertical	Pass
5**	11439.475	37.96	-3.27	54.0	16.04	AV	75.00	150	Vertical	Pass
6	17185.989	50.48	0.15	74.0	23.52	Peak	279.00	150	Vertical	Pass
6**	17185.989	39.48	0.15	54.0	14.52	AV	279.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.20.56

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

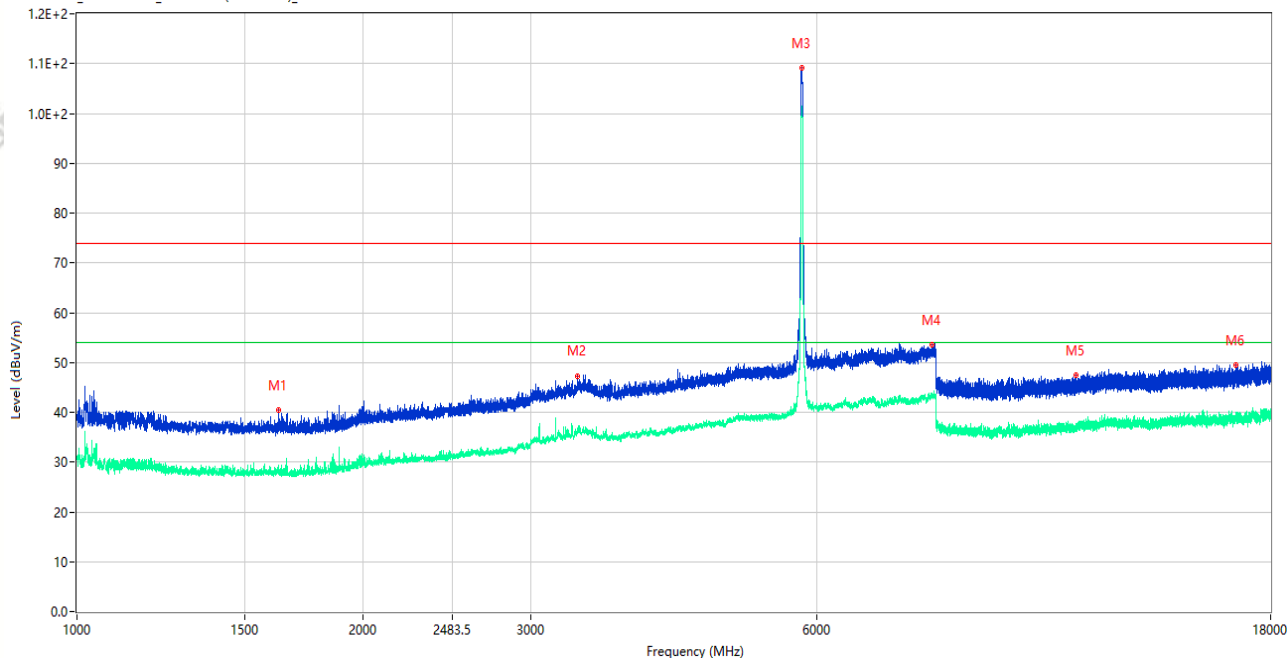

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1629.250	40.43	-16.03	74.0	33.57	Peak	167.00	150	Horizontal	Pass
1**	1629.250	28.26	-16.03	54.0	25.74	AV	167.00	150	Horizontal	Pass
2	3360.000	47.32	-5.81	74.0	26.68	Peak	272.00	150	Horizontal	Pass
2**	3360.000	35.88	-5.81	54.0	18.12	AV	272.00	150	Horizontal	Pass
3	5784.000	109.14	-1.54	74.0	-35.14	Peak	350.00	150	Horizontal	N/A
3**	5784.000	100.92	-1.54	54.0	-46.92	AV	350.00	150	Horizontal	N/A
4	7919.000	53.67	1.95	74.0	20.33	Peak	192.00	150	Horizontal	Pass
4**	7919.000	43.13	1.95	54.0	10.87	AV	192.00	150	Horizontal	Pass
5	11239.737	47.37	-4.35	74.0	26.63	Peak	121.00	150	Horizontal	Pass
5**	11239.737	36.70	-4.35	54.0	17.30	AV	121.00	150	Horizontal	Pass
6	16565.175	49.54	-1.08	74.0	24.46	Peak	312.00	150	Horizontal	Pass
6**	16565.175	38.73	-1.08	54.0	15.27	AV	312.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_18.46.05

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax40 CH159 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

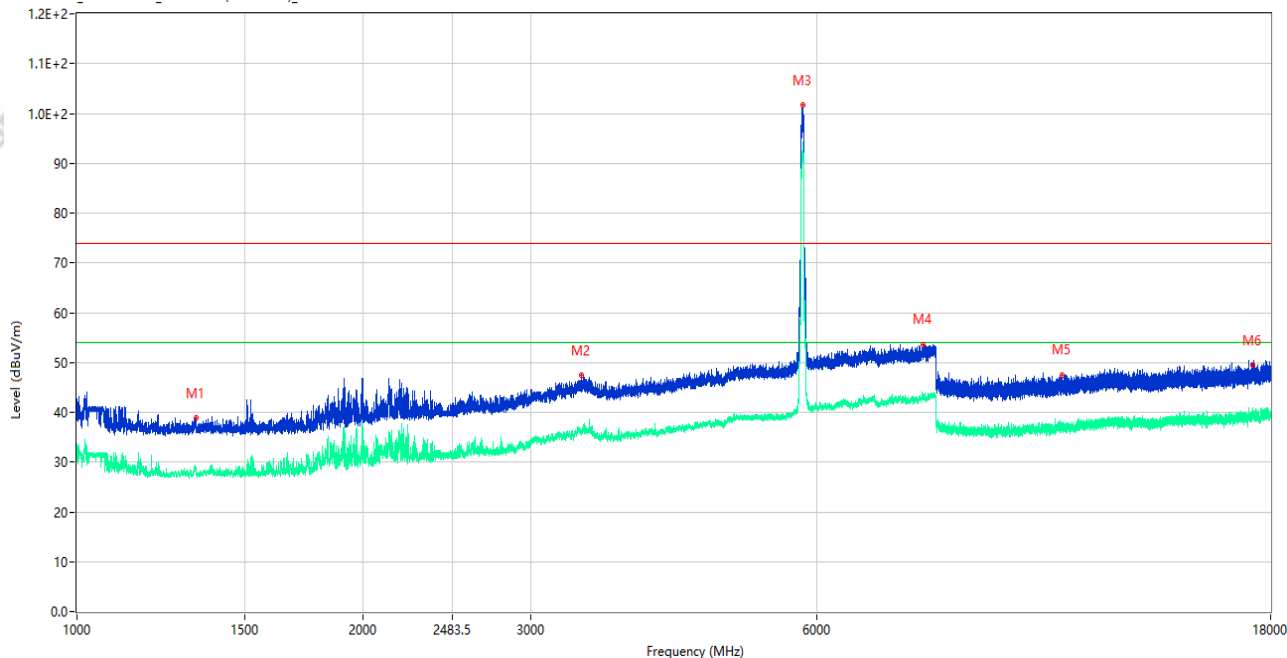

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.250	38.95	-16.02	74.0	35.05	Peak	129.00	150	Vertical	Pass
1**	1333.250	28.25	-16.02	54.0	25.75	AV	129.00	150	Vertical	Pass
2	3391.000	47.54	-5.75	74.0	26.46	Peak	340.00	150	Vertical	Pass
2**	3391.000	35.76	-5.75	54.0	18.24	AV	340.00	150	Vertical	Pass
3	5797.500	101.75	-1.44	74.0	-27.75	Peak	172.00	150	Vertical	N/A
3**	5797.500	94.12	-1.44	54.0	-40.12	AV	172.00	150	Vertical	Fail
4	7751.500	53.62	1.53	74.0	20.38	Peak	360.00	150	Vertical	Pass
4**	7751.500	43.08	1.53	54.0	10.92	AV	360.00	150	Vertical	Pass
5	10864.487	47.55	-3.23	74.0	26.45	Peak	0.00	150	Vertical	Pass
5**	10864.487	36.79	-3.23	54.0	17.21	AV	0.00	150	Vertical	Pass
6	17229.562	49.40	-0.39	74.0	24.60	Peak	360.00	150	Vertical	Pass
6**	17229.562	39.68	-0.39	54.0	14.32	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_18.50.16

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax40 CH159 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

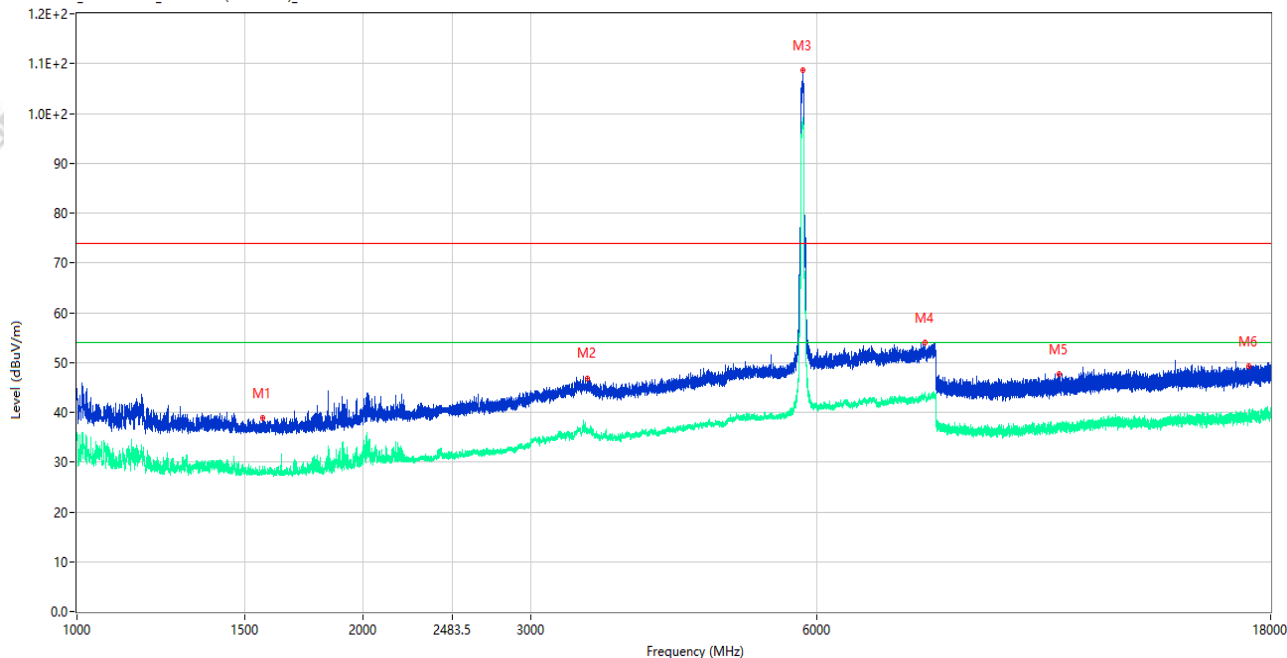

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1566.500	38.76	-16.05	74.0	35.24	Peak	0.00	150	Horizontal	Pass
1**	1566.500	27.72	-16.05	54.0	26.28	AV	0.00	150	Horizontal	Pass
2	3441.000	46.87	-5.30	74.0	27.13	Peak	360.00	150	Horizontal	Pass
2**	3441.000	36.64	-5.30	54.0	17.36	AV	360.00	150	Horizontal	Pass
3	5796.000	108.60	-1.43	74.0	-34.60	Peak	340.00	150	Horizontal	N/A
3**	5796.000	98.39	-1.43	54.0	-44.39	AV	340.00	150	Horizontal	Fail
4	7792.500	53.96	1.65	74.0	20.04	Peak	52.00	150	Horizontal	Pass
4**	7792.500	43.57	1.65	54.0	10.43	AV	52.00	150	Horizontal	Pass
5	10784.687	47.74	-3.04	74.0	26.26	Peak	51.00	150	Horizontal	Pass
5**	10784.687	36.80	-3.04	54.0	17.20	AV	51.00	150	Horizontal	Pass
6	17064.713	49.34	-1.04	74.0	24.66	Peak	345.00	150	Horizontal	Pass
6**	17064.713	38.25	-1.04	54.0	15.75	AV	345.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.33.22

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax80 CH155 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

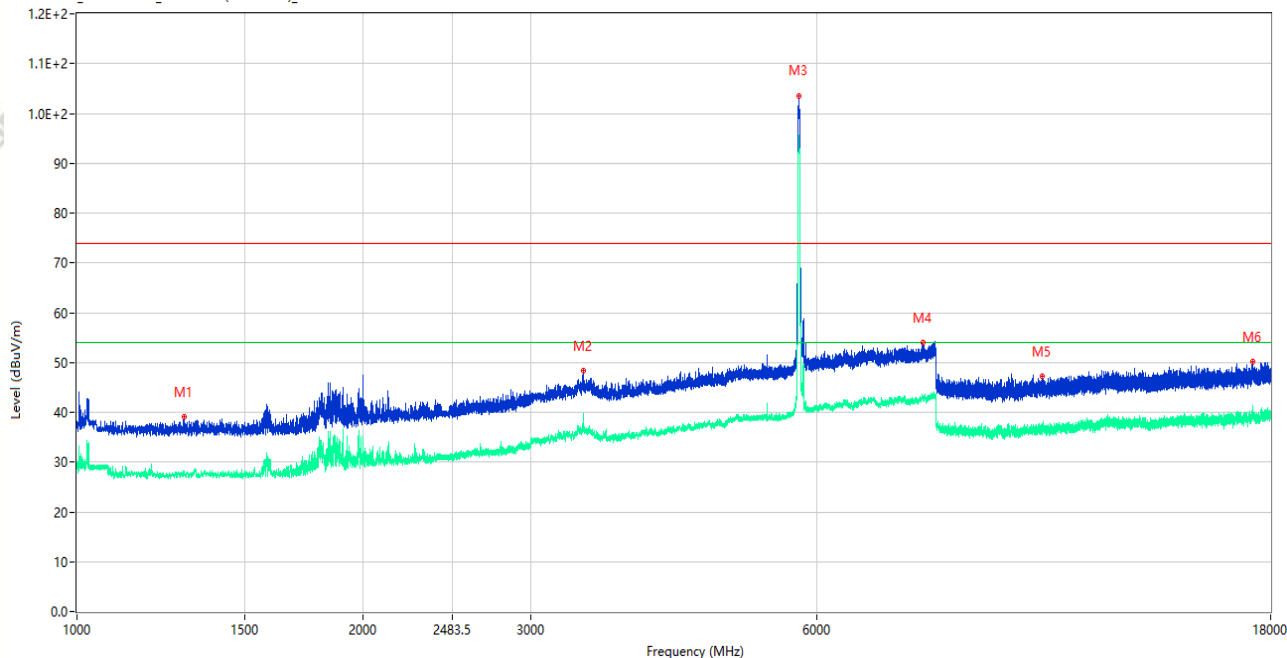

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1295.500	39.06	-15.71	74.0	34.94	Peak	154.00	150	Vertical	Pass
1**	1295.500	27.80	-15.71	54.0	26.20	AV	154.00	150	Vertical	Pass
2	3406.000	48.28	-5.41	74.0	25.72	Peak	271.00	150	Vertical	Pass
2**	3406.000	37.69	-5.41	54.0	16.31	AV	271.00	150	Vertical	Pass
3	5744.500	103.14	-2.18	74.0	-29.14	Peak	162.00	150	Vertical	N/A
3**	5744.500	95.55	-2.18	54.0	-41.55	AV	162.00	150	Vertical	N/A
4	7764.000	54.06	1.32	74.0	19.94	Peak	249.00	150	Vertical	Pass
4**	7764.000	43.00	1.32	54.0	11.00	AV	249.00	150	Vertical	Pass
5	10364.313	47.26	-3.16	74.0	26.74	Peak	236.00	150	Vertical	Pass
5**	10364.313	37.35	-3.16	54.0	16.65	AV	236.00	150	Vertical	Pass
6	17249.776	50.09	-0.58	74.0	23.91	Peak	76.00	150	Vertical	Pass
6**	17249.776	39.96	-0.58	54.0	14.04	AV	76.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.37.31

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax80 CH155 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

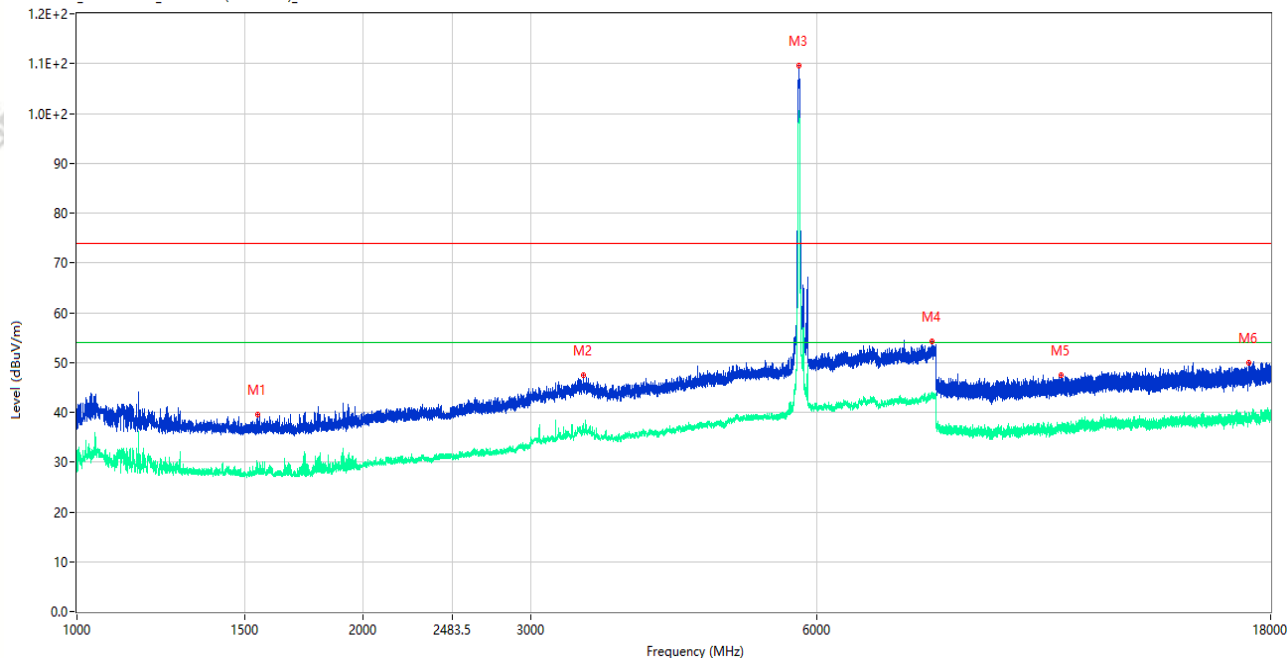

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1547.750	39.56	-16.02	74.0	34.44	Peak	321.00	150	Horizontal	Pass
1**	1547.750	27.71	-16.02	54.0	26.29	AV	321.00	150	Horizontal	Pass
2	3412.500	47.39	-5.28	74.0	26.61	Peak	102.00	150	Horizontal	Pass
2**	3412.500	36.11	-5.28	54.0	17.89	AV	102.00	150	Horizontal	Pass
3	5747.500	109.64	-2.14	74.0	-35.64	Peak	360.00	150	Horizontal	N/A
3**	5747.500	100.57	-2.14	54.0	-46.57	AV	360.00	150	Horizontal	N/A
4	7928.000	54.24	1.98	74.0	19.76	Peak	249.00	150	Horizontal	Pass
4**	7928.000	43.16	1.98	54.0	10.84	AV	249.00	150	Horizontal	Pass
5	10833.138	47.42	-3.45	74.0	26.58	Peak	0.00	150	Horizontal	Pass
5**	10833.138	36.37	-3.45	54.0	17.63	AV	0.00	150	Horizontal	Pass
6	17091.489	49.87	-0.67	74.0	24.13	Peak	314.00	150	Horizontal	Pass
6**	17091.489	39.01	-0.67	54.0	14.99	AV	314.00	150	Horizontal	Pass

Aux. Antenna

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_09.36.22

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=10


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

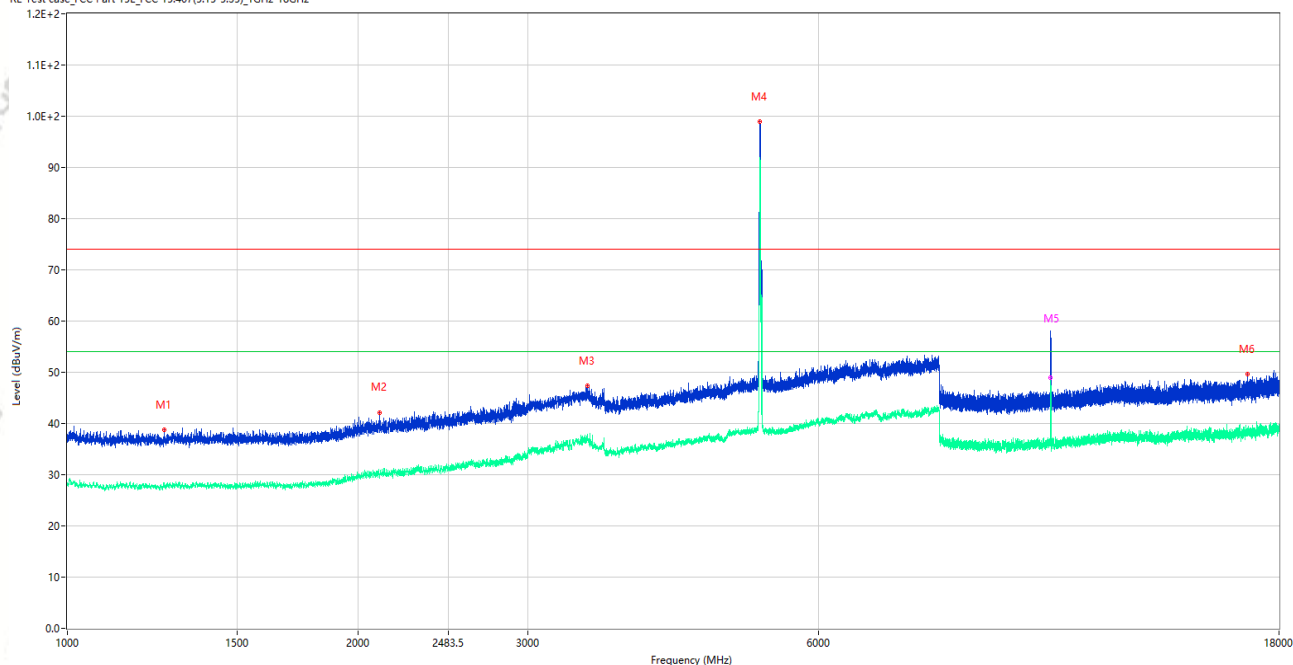

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1259.750	38.75	-16.03	74.0	35.25	Peak	46.00	150	Vertical	Pass
1**	1259.750	28.41	-16.03	54.0	25.59	AV	46.00	150	Vertical	Pass
2	2107.250	42.14	-13.58	74.0	31.86	Peak	360.00	150	Vertical	Pass
2**	2107.250	30.09	-13.58	54.0	23.91	AV	360.00	150	Vertical	Pass
3	3456.000	47.36	-4.89	74.0	26.64	Peak	179.00	150	Vertical	Pass
3**	3456.000	37.97	-4.89	54.0	16.03	AV	179.00	150	Vertical	Pass
4	5219.000	98.87	-2.36	74.0	-24.87	Peak	139.00	150	Vertical	N/A
4**	5219.000	91.42	-2.36	54.0	-37.42	AV	139.00	150	Vertical	N/A
5	10439.599	55.08	-3.45	74.0	18.92	Peak	263.00	150	Vertical	Pass
5**	10439.599	48.94	-3.45	54.0	5.06	AV	263.00	150	Vertical	Pass
6	16702.725	49.60	-1.77	74.0	24.40	Peak	150.00	150	Vertical	Pass


6**	16702.725	38.03	-1.77	54.0	15.97	AV	150.00	150	Vertical	Pass
-----	-----------	-------	-------	------	-------	----	--------	-----	----------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_09.41.17

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11a CH44 P=10
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

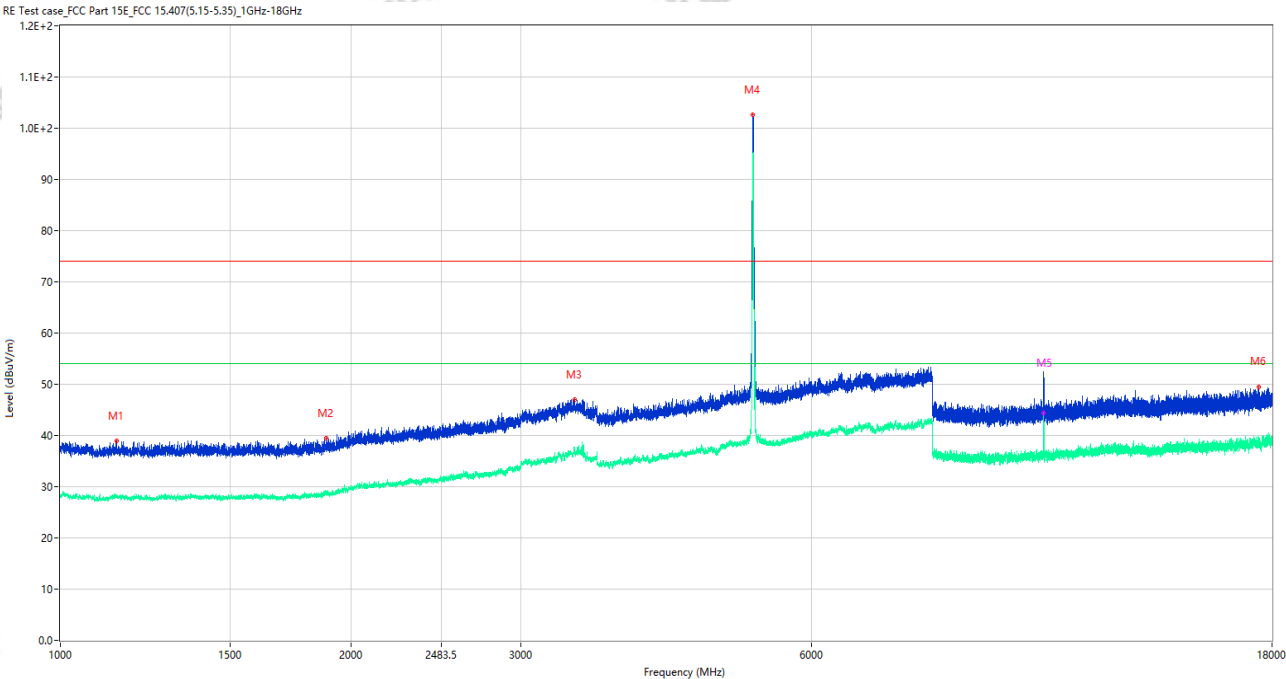

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1142.750	38.90	-15.59	74.0	35.10	Peak	308.00	150	Horizontal	Pass
1**	1142.750	28.26	-15.59	54.0	25.74	AV	308.00	150	Horizontal	Pass
2	1886.000	39.40	-15.32	74.0	34.60	Peak	360.00	150	Horizontal	Pass
2**	1886.000	28.64	-15.32	54.0	25.36	AV	360.00	150	Horizontal	Pass
3	3409.500	47.09	-5.34	74.0	26.91	Peak	295.00	150	Horizontal	Pass
3**	3409.500	39.42	-5.34	54.0	14.58	AV	295.00	150	Horizontal	Pass
4	5218.500	102.59	-2.37	74.0	-28.59	Peak	4.00	150	Horizontal	N/A
4**	5218.500	94.99	-2.37	54.0	-40.99	AV	4.00	150	Horizontal	N/A
5	10442.213	49.35	-3.30	74.0	24.65	Peak	261.00	150	Horizontal	Pass
5**	10442.213	44.41	-3.30	54.0	9.59	AV	261.00	150	Horizontal	Pass
6	17430.374	49.51	-0.09	74.0	24.49	Peak	82.00	150	Horizontal	Pass


6**	17430.374	38.46	-0.09	54.0	15.54	AV	82.00	150	Horizontal	Pass
-----	-----------	-------	-------	------	-------	----	-------	-----	------------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_09.48.56

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH44 P=11
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

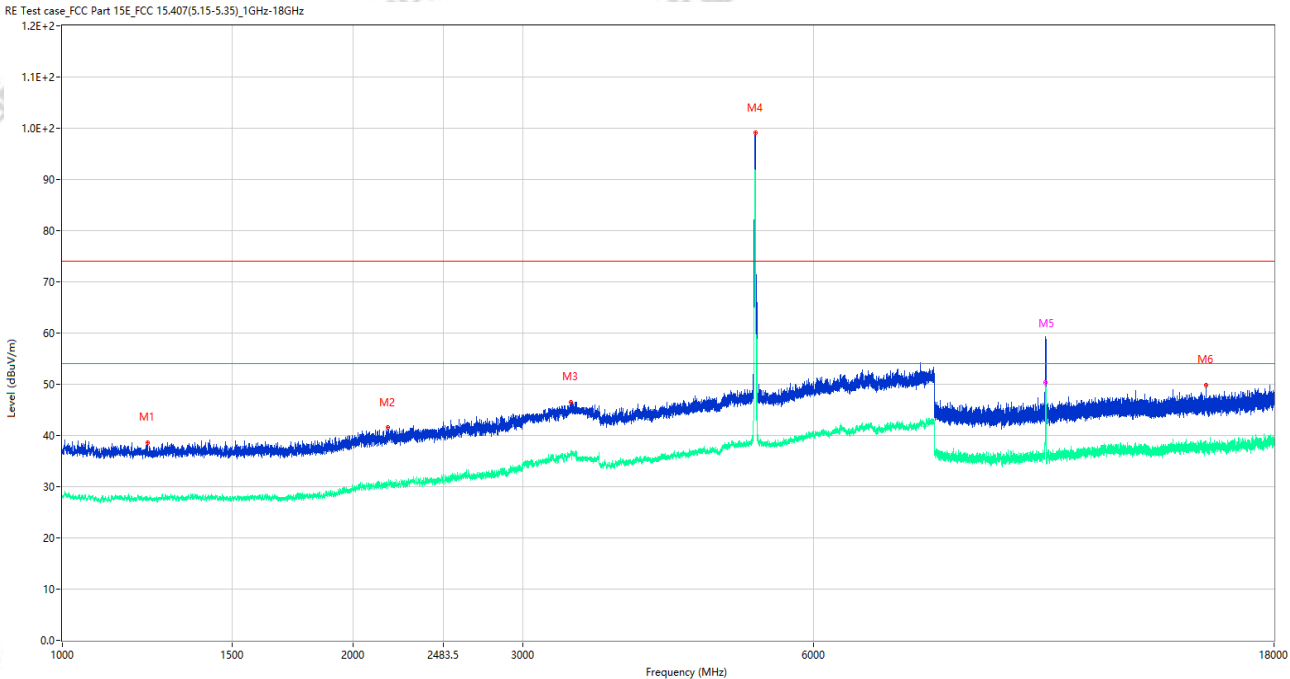

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1226.000	38.61	-15.99	74.0	35.39	Peak	360.00	150	Vertical	Pass
1**	1226.000	27.68	-15.99	54.0	26.32	AV	360.00	150	Vertical	Pass
2	2174.000	41.49	-12.94	74.0	32.51	Peak	28.00	150	Vertical	Pass
2**	2174.000	30.09	-12.94	54.0	23.91	AV	28.00	150	Vertical	Pass
3	3362.500	46.50	-5.50	74.0	27.50	Peak	355.00	150	Vertical	Pass
3**	3362.500	36.79	-5.50	54.0	17.21	AV	355.00	150	Vertical	Pass
4	5221.000	99.06	-2.36	74.0	-25.06	Peak	131.00	150	Vertical	N/A
4**	5221.000	91.71	-2.36	54.0	-37.71	AV	131.00	150	Vertical	N/A
5	10441.737	54.46	-3.31	74.0	19.54	Peak	264.00	150	Vertical	Pass
5**	10441.737	50.39	-3.31	54.0	3.61	AV	264.00	150	Vertical	Pass
6	15314.099	49.83	-2.15	74.0	24.17	Peak	346.00	150	Vertical	Pass


6**	15314.099	38.26	-2.15	54.0	15.74	AV	346.00	150	Vertical	Pass
-----	-----------	-------	-------	------	-------	----	--------	-----	----------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_09.54.18

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH44 P=11
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

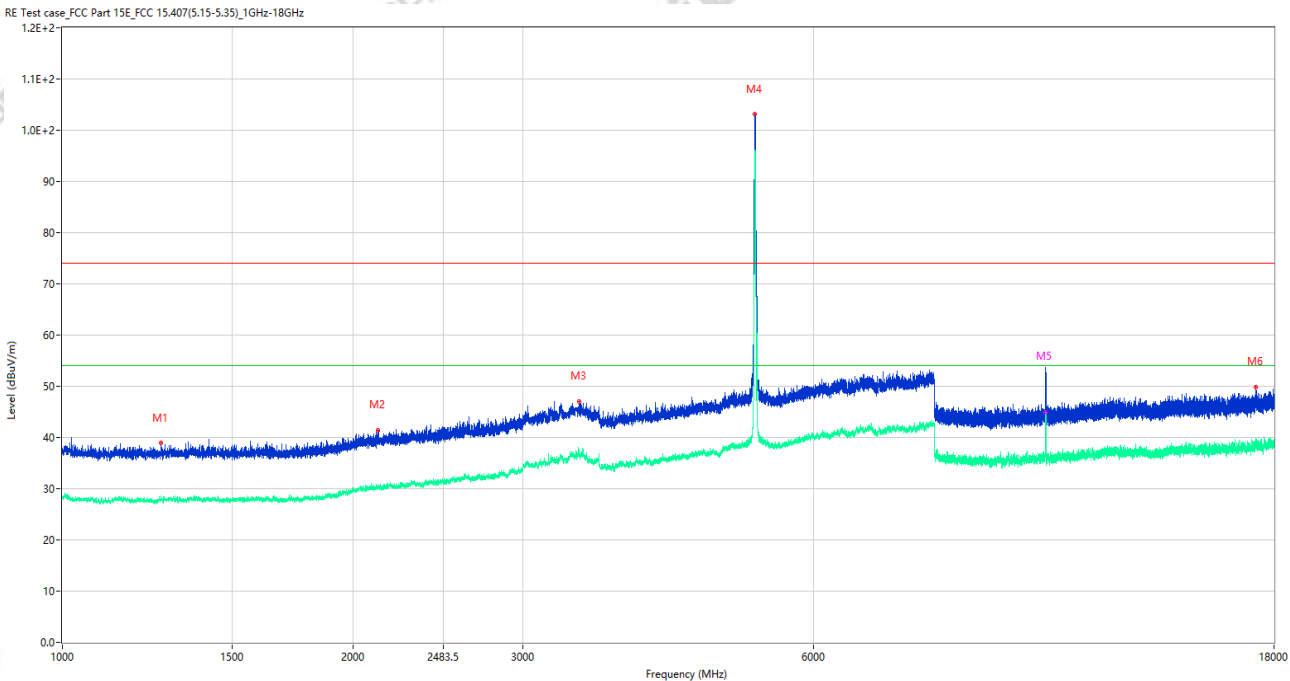

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1265.000	38.93	-15.96	74.0	35.07	Peak	323.00	150	Horizontal	Pass
1**	1265.000	27.96	-15.96	54.0	26.04	AV	323.00	150	Horizontal	Pass
2	2121.750	41.42	-13.32	74.0	32.58	Peak	241.00	150	Horizontal	Pass
2**	2121.750	30.29	-13.32	54.0	23.71	AV	241.00	150	Horizontal	Pass
3	3430.000	46.95	-5.02	74.0	27.05	Peak	351.00	150	Horizontal	Pass
3**	3430.000	36.76	-5.02	54.0	17.24	AV	351.00	150	Horizontal	Pass
4	5219.000	103.14	-2.36	74.0	-29.14	Peak	351.00	150	Horizontal	N/A
4**	5219.000	95.60	-2.36	54.0	-41.60	AV	351.00	150	Horizontal	N/A
5	10442.213	50.32	-3.30	74.0	23.68	Peak	285.00	150	Horizontal	Pass
5**	10442.213	44.95	-3.30	54.0	9.05	AV	285.00	150	Horizontal	Pass
6	17234.287	49.85	-0.48	74.0	24.15	Peak	15.00	150	Horizontal	Pass


6**	17234.287	39.30	-0.48	54.0	14.70	AV	15.00	150	Horizontal	Pass
-----	-----------	-------	-------	------	-------	----	-------	-----	------------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_10.05.18

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n40 CH38 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

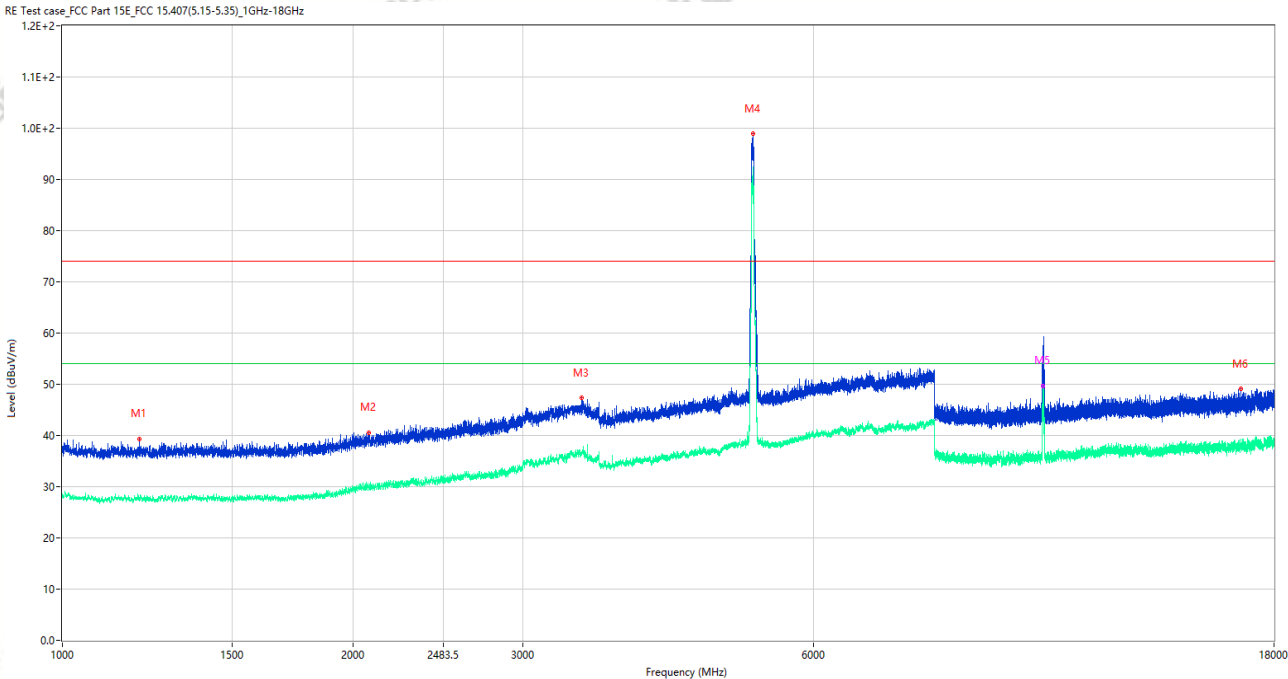

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1201.500	39.34	-15.75	74.0	34.66	Peak	326.00	150	Vertical	Pass
1**	1201.500	27.27	-15.75	54.0	26.73	AV	326.00	150	Vertical	Pass
2	2075.500	40.44	-13.77	74.0	33.56	Peak	360.00	150	Vertical	Pass
2**	2075.500	29.95	-13.77	54.0	24.05	AV	360.00	150	Vertical	Pass
3	3452.500	47.36	-4.95	74.0	26.64	Peak	355.00	150	Vertical	Pass
3**	3452.500	36.62	-4.95	54.0	17.38	AV	355.00	150	Vertical	Pass
4	5191.500	98.93	-2.30	74.0	-24.93	Peak	141.00	150	Vertical	N/A
4**	5191.500	91.76	-2.30	54.0	-37.76	AV	141.00	150	Vertical	N/A
5	10378.087	52.43	-3.42	74.0	21.57	Peak	264.00	150	Vertical	Pass
5**	10378.087	49.72	-3.42	54.0	4.28	AV	264.00	150	Vertical	Pass
6	16636.575	49.07	-1.16	74.0	24.93	Peak	117.00	150	Vertical	Pass


6**	16636.575	38.53	-1.16	54.0	15.47	AV	117.00	150	Vertical	Pass
-----	-----------	-------	-------	------	-------	----	--------	-----	----------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_10.14.21

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n40 CH38 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

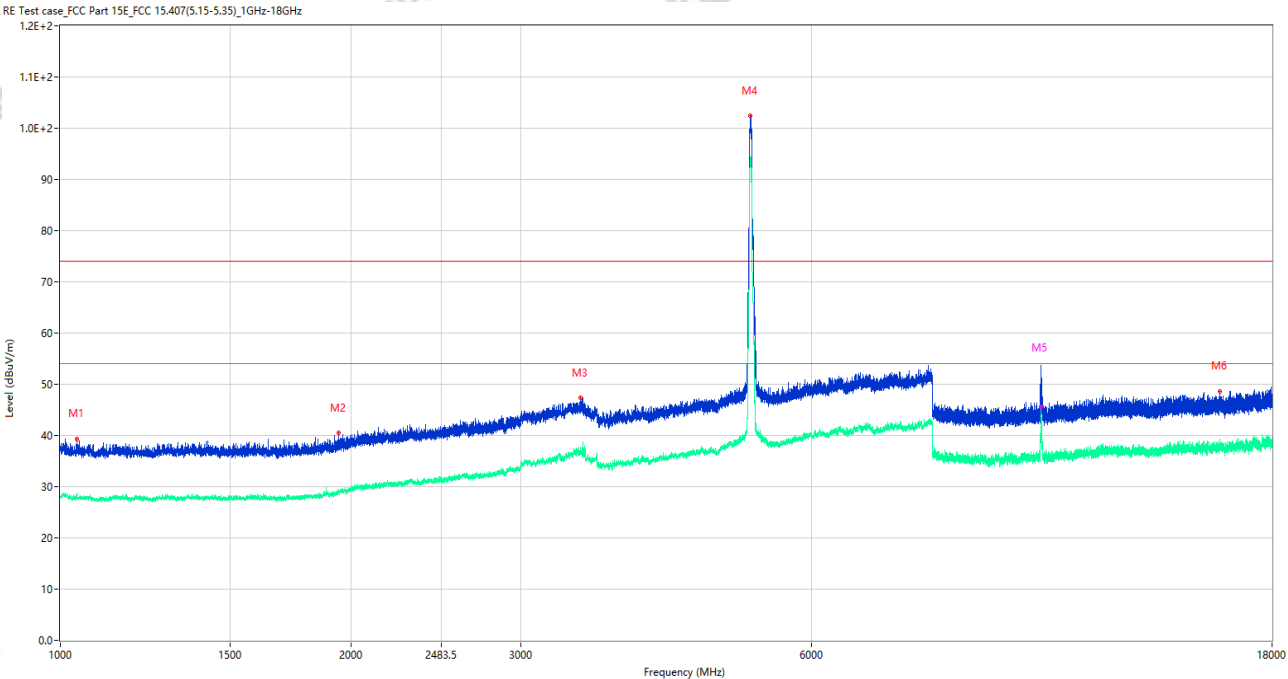

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1041.250	39.35	-15.37	74.0	34.65	Peak	323.00	150	Horizontal	Pass
1**	1041.250	27.85	-15.37	54.0	26.15	AV	323.00	150	Horizontal	Pass
2	1941.250	40.59	-14.96	74.0	33.41	Peak	291.00	150	Horizontal	Pass
2**	1941.250	29.36	-14.96	54.0	24.64	AV	291.00	150	Horizontal	Pass
3	3459.500	47.44	-4.94	74.0	26.56	Peak	337.00	150	Horizontal	Pass
3**	3459.500	37.79	-4.94	54.0	16.21	AV	337.00	150	Horizontal	Pass
4	5187.500	102.44	-2.34	74.0	-28.44	Peak	359.00	150	Horizontal	N/A
4**	5187.500	94.39	-2.34	54.0	-40.39	AV	359.00	150	Horizontal	N/A
5	10379.037	51.60	-3.40	74.0	22.40	Peak	264.00	150	Horizontal	Pass
5**	10379.037	45.63	-3.40	54.0	8.37	AV	264.00	150	Horizontal	Pass
6	15892.125	48.64	-1.55	74.0	25.36	Peak	288.00	150	Horizontal	Pass


6**	15892.125	38.22	-1.55	54.0	15.78	AV	288.00	150	Horizontal	Pass
-----	-----------	-------	-------	------	-------	----	--------	-----	------------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_10.25.05

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ac80 CH42 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

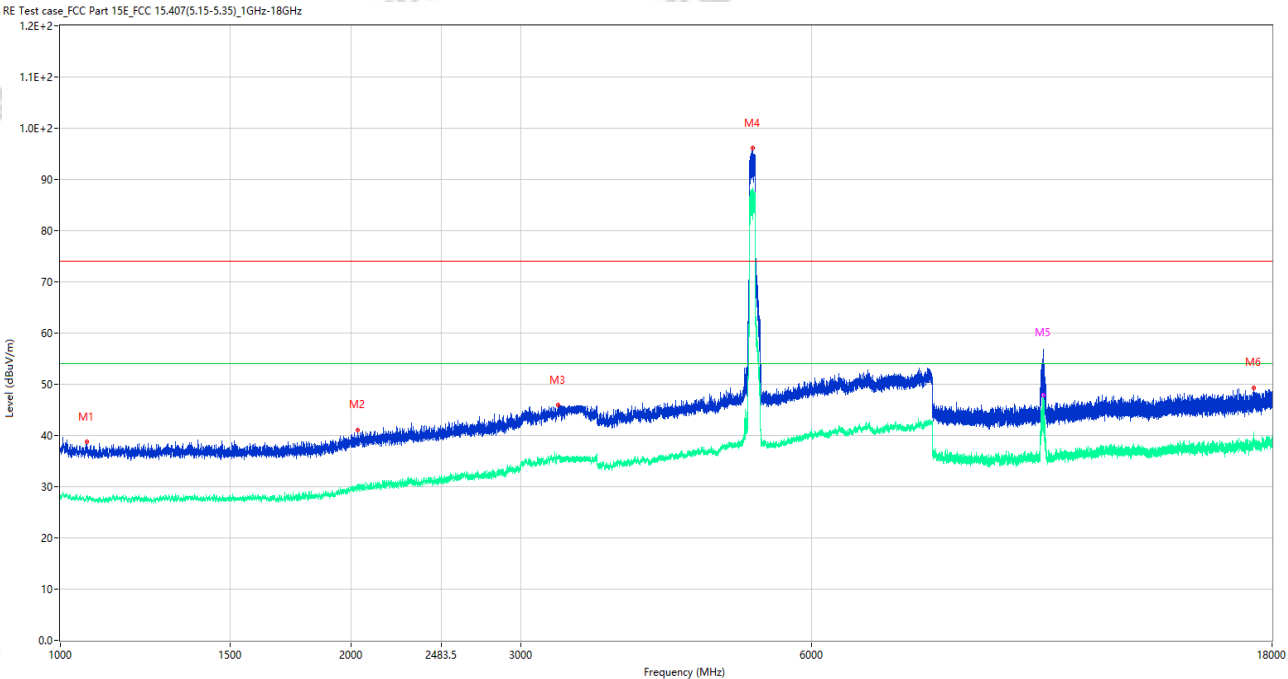

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1066.250	38.75	-15.14	74.0	35.25	Peak	304.00	150	Vertical	Pass
1**	1066.250	27.68	-15.14	54.0	26.32	AV	304.00	150	Vertical	Pass
2	2033.000	41.07	-13.45	74.0	32.93	Peak	360.00	150	Vertical	Pass
2**	2033.000	29.97	-13.45	54.0	24.03	AV	360.00	150	Vertical	Pass
3	3277.500	45.88	-6.99	74.0	28.12	Peak	161.00	150	Vertical	Pass
3**	3277.500	35.46	-6.99	54.0	18.54	AV	161.00	150	Vertical	Pass
4	5215.500	96.10	-2.32	74.0	-22.10	Peak	130.00	150	Vertical	N/A
4**	5215.500	88.14	-2.32	54.0	-34.14	AV	130.00	150	Vertical	N/A
5	10436.750	53.43	-3.34	74.0	20.57	Peak	239.00	150	Vertical	Pass
5**	10436.750	47.83	-3.34	54.0	6.17	AV	239.00	150	Vertical	Pass
6	17217.489	49.32	-0.76	74.0	24.68	Peak	215.00	150	Vertical	Pass


6**	17217.489	38.25	-0.76	54.0	15.75	AV	215.00	150	Vertical	Pass
-----	-----------	-------	-------	------	-------	----	--------	-----	----------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_10.30.55

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ac80 CH42 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

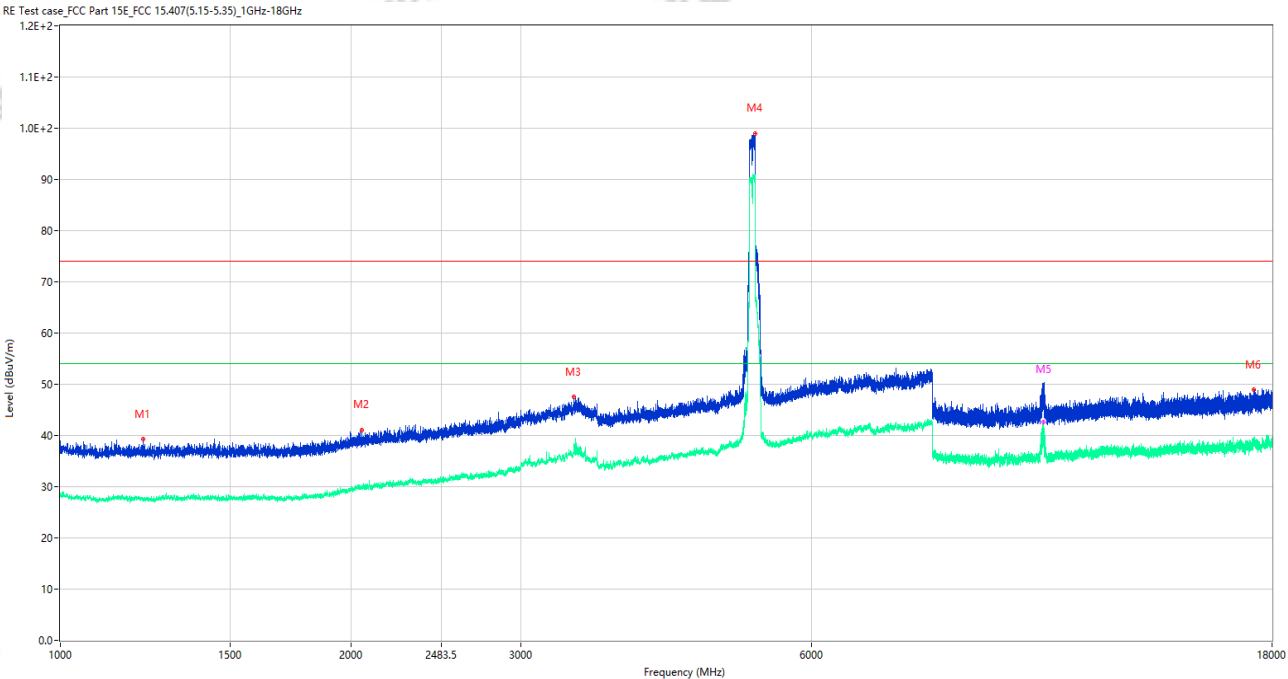

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1217.500	39.27	-15.96	74.0	34.73	Peak	296.00	150	Horizontal	Pass
1**	1217.500	27.28	-15.96	54.0	26.72	AV	296.00	150	Horizontal	Pass
2	2052.750	41.09	-13.73	74.0	32.91	Peak	129.00	150	Horizontal	Pass
2**	2052.750	30.05	-13.73	54.0	23.95	AV	129.00	150	Horizontal	Pass
3	3404.000	47.53	-5.50	74.0	26.47	Peak	246.00	150	Horizontal	Pass
3**	3404.000	37.69	-5.50	54.0	16.31	AV	246.00	150	Horizontal	Pass
4	5244.000	99.03	-2.16	74.0	-25.03	Peak	10.00	150	Horizontal	N/A
4**	5244.000	90.25	-2.16	54.0	-36.25	AV	10.00	150	Horizontal	N/A
5	10441.263	50.24	-3.32	74.0	23.76	Peak	239.00	150	Horizontal	Pass
5**	10441.263	42.61	-3.32	54.0	11.39	AV	239.00	150	Horizontal	Pass
6	17224.575	48.91	-0.72	74.0	25.09	Peak	149.00	150	Horizontal	Pass

	辐射杂散 Radiated Spurious Emissions	文件编号(No.):	ECTR4-R21
		版本(Version):	V1.0


6**	17224.575	38.27	-0.72	54.0	15.73	AV	149.00	150	Horizontal	Pass
-----	-----------	-------	-------	------	-------	----	--------	-----	------------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_10.51.24

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ax20 CH44 P=11
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

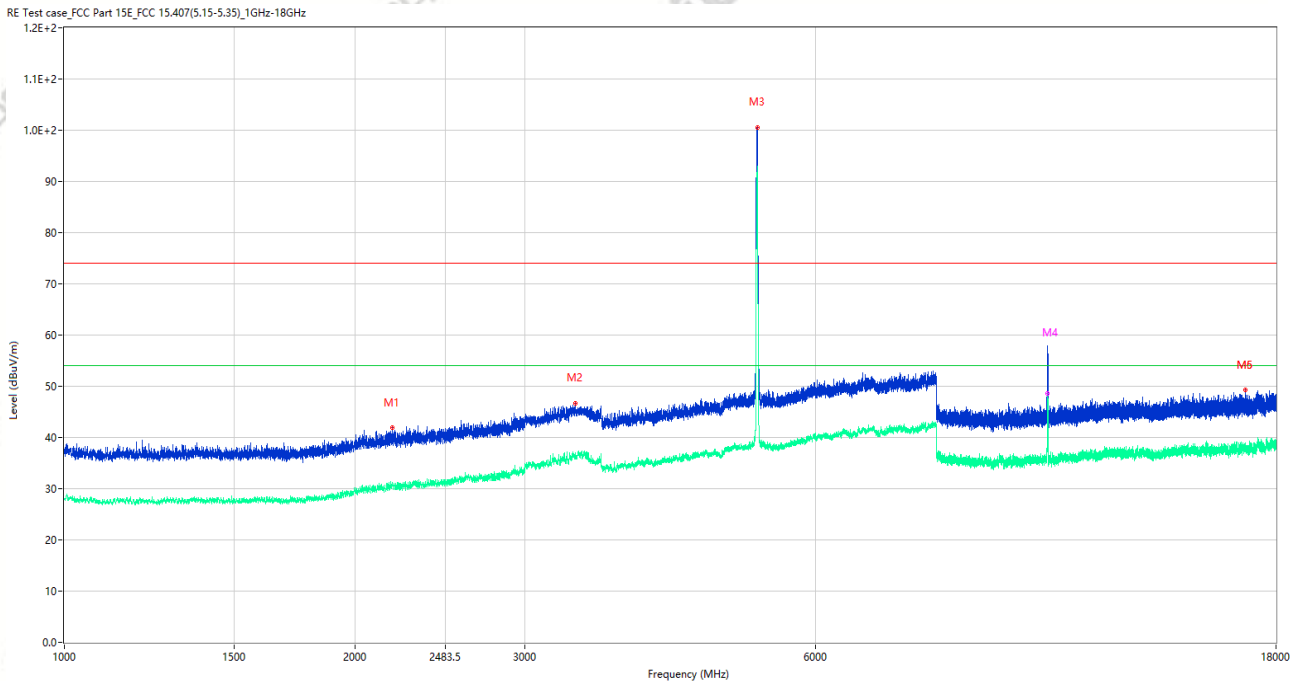

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2187.000	41.84	-13.24	74.0	32.16	Peak	172.00	150	Vertical	Pass
1**	2187.000	30.96	-13.24	54.0	23.04	AV	172.00	150	Vertical	Pass
2	3380.500	46.72	-5.13	74.0	27.28	Peak	0.00	150	Vertical	Pass
2**	3380.500	36.41	-5.13	54.0	17.59	AV	0.00	150	Vertical	Pass
3	5221.500	100.55	-2.37	74.0	-26.55	Peak	137.00	150	Vertical	N/A
3**	5221.500	93.00	-2.37	54.0	-39.00	AV	137.00	150	Vertical	N/A
4	10436.037	54.75	-3.39	74.0	19.25	Peak	263.00	150	Vertical	Pass
4**	10436.037	48.64	-3.39	54.0	5.36	AV	263.00	150	Vertical	Pass
5	16727.136	49.26	-1.80	74.0	24.74	Peak	184.00	150	Vertical	Pass
5**	16727.136	37.87	-1.80	54.0	16.13	AV	184.00	150	Vertical	Pass
6	16727.136	49.26	-1.80	74.0	24.74	Peak	184.00	150	Vertical	Pass


6**	16727.136	37.87	-1.80	54.0	16.13	AV	184.00	150	Vertical	Pass
-----	-----------	-------	-------	------	-------	----	--------	-----	----------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_10.43.39

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ax20 CH44 P=11
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

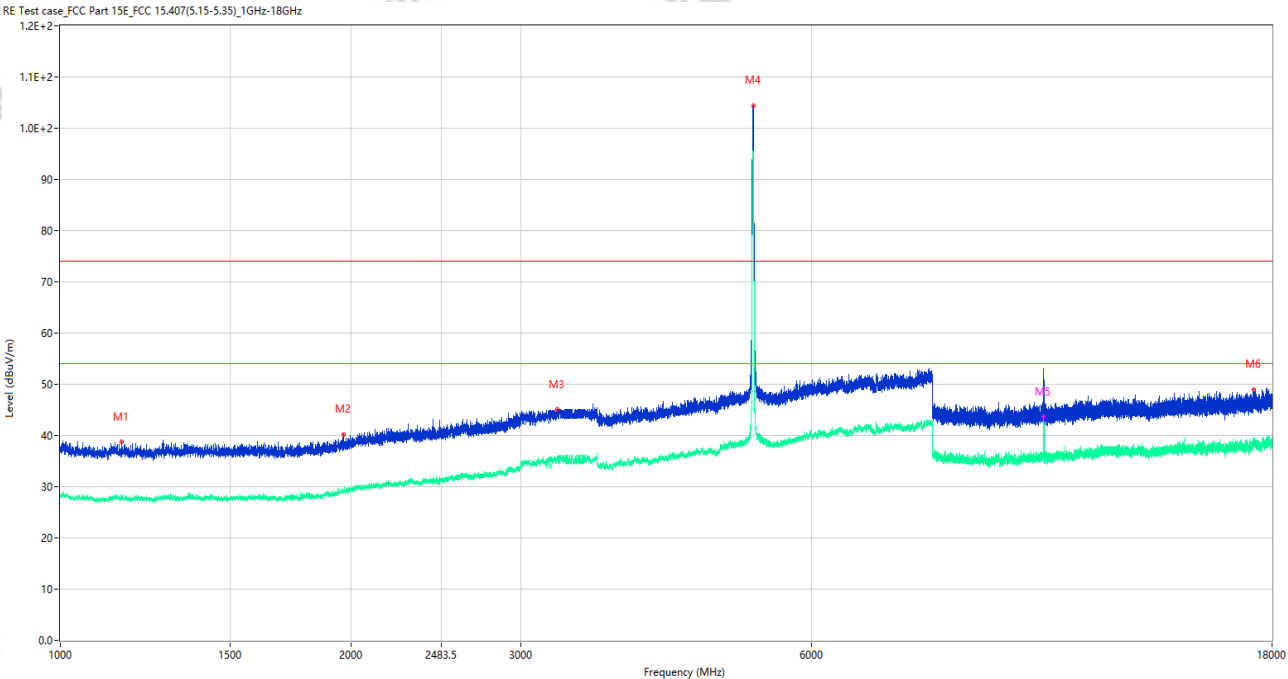

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1157.500	38.75	-15.55	74.0	35.25	Peak	332.00	150	Horizontal	Pass
1**	1157.500	27.76	-15.55	54.0	26.24	AV	332.00	150	Horizontal	Pass
2	1963.500	40.11	-14.99	74.0	33.89	Peak	126.00	150	Horizontal	Pass
2**	1963.500	28.98	-14.99	54.0	25.02	AV	126.00	150	Horizontal	Pass
3	3269.000	45.06	-6.89	74.0	28.94	Peak	0.00	150	Horizontal	Pass
3**	3269.000	35.21	-6.89	54.0	18.79	AV	0.00	150	Horizontal	Pass
4	5221.000	104.45	-2.36	74.0	-30.45	Peak	0.00	150	Horizontal	N/A
4**	5221.000	95.12	-2.36	54.0	-41.12	AV	0.00	150	Horizontal	N/A
5	10438.651	49.70	-3.41	74.0	24.30	Peak	240.00	150	Horizontal	Pass
5**	10438.651	43.63	-3.41	54.0	10.37	AV	240.00	150	Horizontal	Pass
6	17250.562	48.96	-0.59	74.0	25.04	Peak	319.00	150	Horizontal	Pass


6**	17250.562	38.97	-0.59	54.0	15.03	AV	319.00	150	Horizontal	Pass
-----	-----------	-------	-------	------	-------	----	--------	-----	------------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_11.02.49

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n40 CH38 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

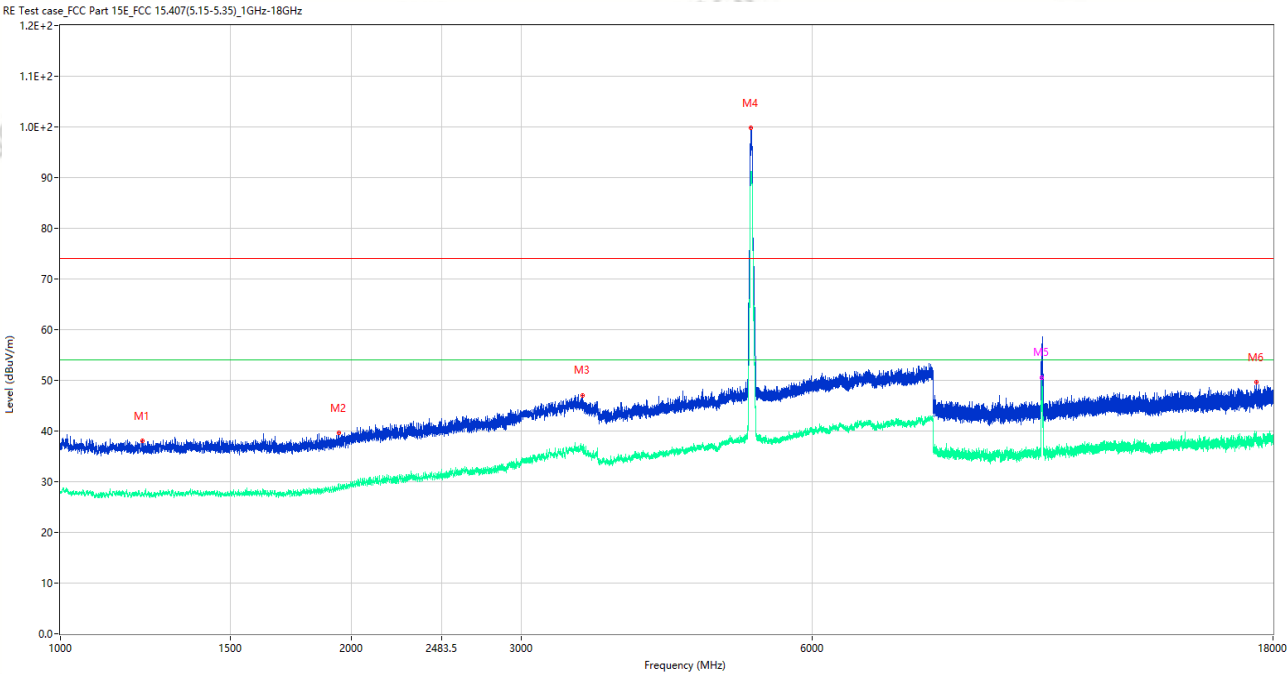

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1215.250	38.08	-15.95	74.0	35.92	Peak	265.00	150	Vertical	Pass
1**	1215.250	27.87	-15.95	54.0	26.13	AV	265.00	150	Vertical	Pass
2	1940.500	39.73	-14.98	74.0	34.27	Peak	218.00	150	Vertical	Pass
2**	1940.500	29.48	-14.98	54.0	24.52	AV	218.00	150	Vertical	Pass
3	3473.000	47.05	-5.85	74.0	26.95	Peak	276.00	150	Vertical	Pass
3**	3473.000	36.54	-5.85	54.0	17.46	AV	276.00	150	Vertical	Pass
4	5189.500	99.82	-2.33	74.0	-25.82	Peak	129.00	150	Vertical	N/A
4**	5189.500	91.16	-2.33	54.0	-37.16	AV	129.00	150	Vertical	N/A
5	10381.650	57.17	-3.27	74.0	16.83	Peak	261.00	150	Vertical	Pass
5**	10381.650	50.55	-3.27	54.0	3.45	AV	261.00	150	Vertical	Pass
6	17293.089	49.57	-0.89	74.0	24.43	Peak	319.00	150	Vertical	Pass
6**	17293.089	38.52	-0.89	54.0	15.48	AV	319.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_11.08.33

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101


Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=13

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

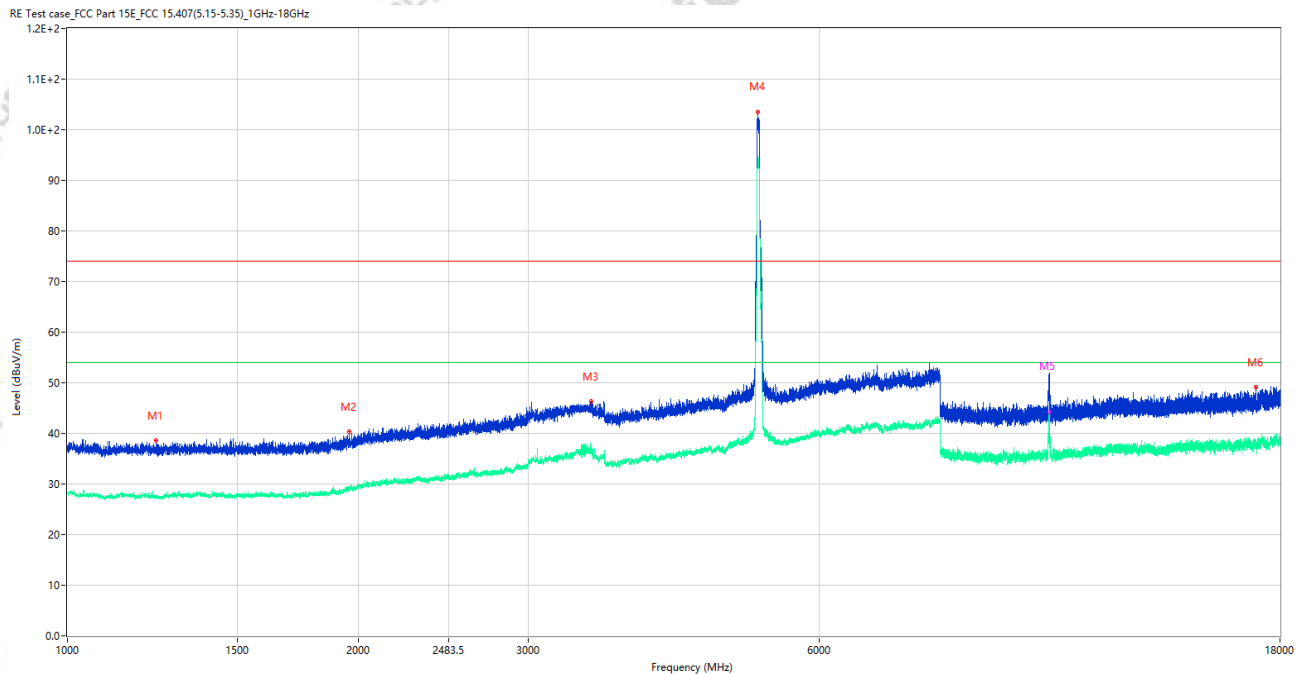Remark: 适配器: A11+数据线: A45
ANT3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1235.250	38.52	-16.00	74.0	35.48	Peak	69.00	150	Horizontal	Pass
1**	1235.250	27.48	-16.00	54.0	26.52	AV	69.00	150	Horizontal	Pass
2	1956.000	40.28	-14.93	74.0	33.72	Peak	87.00	150	Horizontal	Pass
2**	1956.000	29.02	-14.93	54.0	24.98	AV	87.00	150	Horizontal	Pass
3	3485.500	46.39	-6.06	74.0	27.61	Peak	39.00	150	Horizontal	Pass
3**	3485.500	36.69	-6.06	54.0	17.31	AV	39.00	150	Horizontal	Pass
4	5187.500	103.58	-2.34	74.0	-29.58	Peak	0.00	150	Horizontal	N/A
4**	5187.500	93.87	-2.34	54.0	-39.87	AV	0.00	150	Horizontal	N/A
5	10383.075	49.45	-3.29	74.0	24.55	Peak	266.00	150	Horizontal	Pass
5**	10383.075	44.12	-3.29	54.0	9.88	AV	266.00	150	Horizontal	Pass
6	17003.288	49.05	-1.11	74.0	24.95	Peak	15.00	150	Horizontal	Pass


6**	17003.288	37.25	-1.11	54.0	16.75	AV	15.00	150	Horizontal	Pass
-----	-----------	-------	-------	------	-------	----	-------	-----	------------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_11.15.49

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ax80 CH42 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

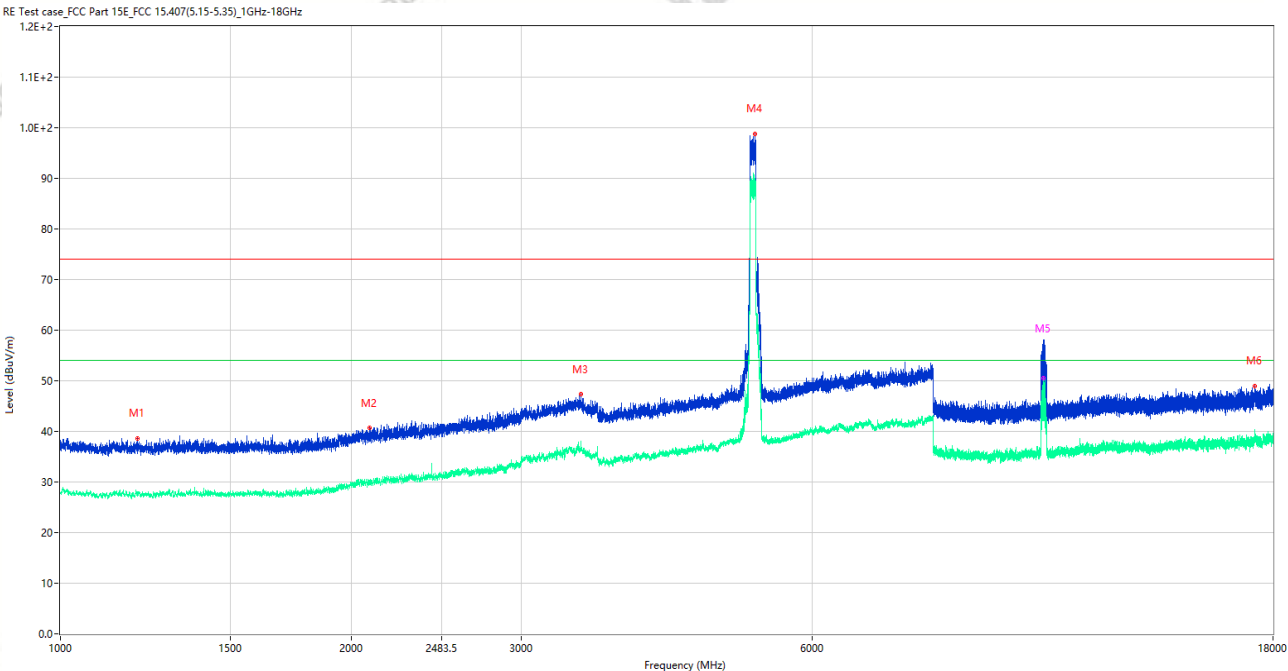

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1201.000	38.61	-15.75	74.0	35.39	Peak	360.00	150	Vertical	Pass
1**	1201.000	27.61	-15.75	54.0	26.39	AV	360.00	150	Vertical	Pass
2	2089.250	40.69	-13.68	74.0	33.31	Peak	68.00	150	Vertical	Pass
2**	2089.250	29.77	-13.68	54.0	24.23	AV	68.00	150	Vertical	Pass
3	3460.500	47.29	-4.95	74.0	26.71	Peak	0.00	150	Vertical	Pass
3**	3460.500	36.73	-4.95	54.0	17.27	AV	0.00	150	Vertical	Pass
4	5240.000	98.80	-2.20	74.0	-24.80	Peak	129.00	150	Vertical	N/A
4**	5240.000	89.31	-2.20	54.0	-35.31	AV	129.00	150	Vertical	N/A
5	10412.287	54.08	-3.29	74.0	19.92	Peak	263.00	150	Vertical	Pass
5**	10412.287	50.48	-3.29	54.0	3.52	AV	263.00	150	Vertical	Pass
6	17234.551	48.89	-0.50	74.0	25.11	Peak	47.00	150	Vertical	Pass


6**	17234.551	39.05	-0.50	54.0	14.95	AV	47.00	150	Vertical	Pass
-----	-----------	-------	-------	------	-------	----	-------	-----	----------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_11.22.12

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ax80 CH42 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A11+数据线: A45 ANT3

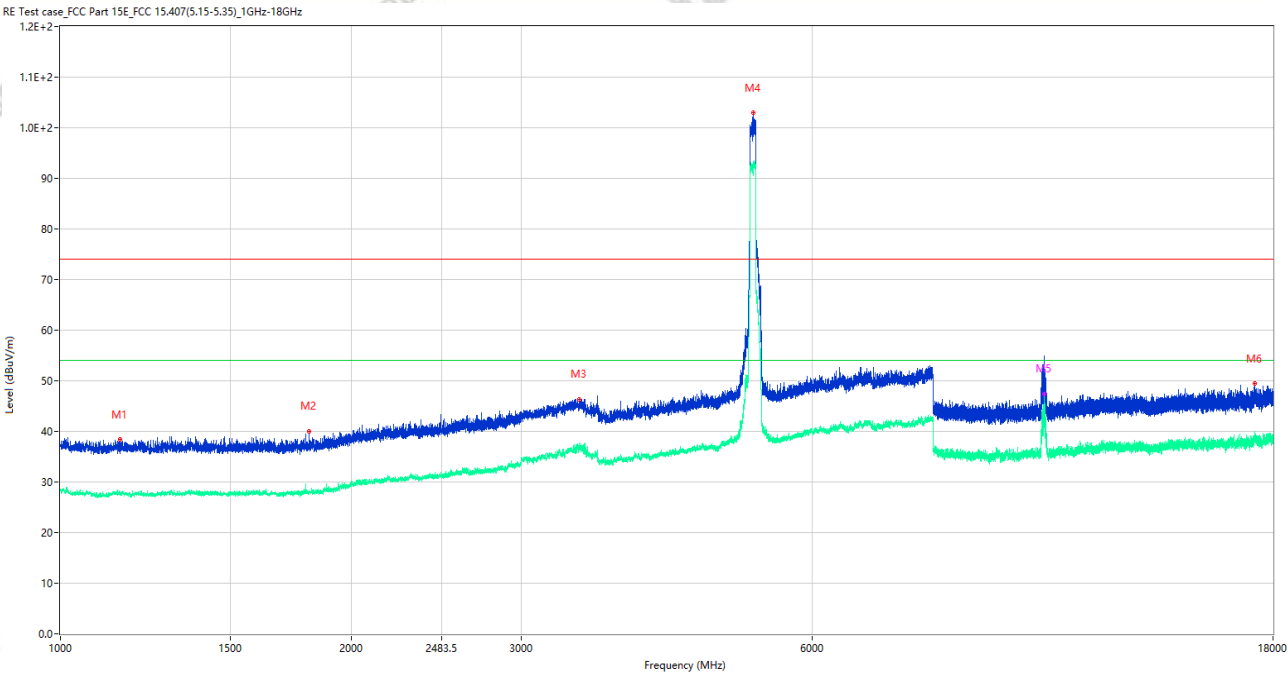

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1152.250	38.38	-15.66	74.0	35.62	Peak	346.00	150	Horizontal	Pass
1**	1152.250	27.66	-15.66	54.0	26.34	AV	346.00	150	Horizontal	Pass
2	1809.000	40.01	-15.98	74.0	33.99	Peak	360.00	150	Horizontal	Pass
2**	1809.000	28.20	-15.98	54.0	25.80	AV	360.00	150	Horizontal	Pass
3	3447.500	46.26	-5.14	74.0	27.74	Peak	266.00	150	Horizontal	Pass
3**	3447.500	37.23	-5.14	54.0	16.77	AV	266.00	150	Horizontal	Pass
4	5211.500	102.92	-2.35	74.0	-28.92	Peak	350.00	150	Horizontal	N/A
4**	5211.500	92.04	-2.35	54.0	-38.04	AV	350.00	150	Horizontal	N/A
5	10438.887	51.41	-3.44	74.0	22.59	Peak	334.00	150	Horizontal	Pass
5**	10438.887	47.42	-3.44	54.0	6.58	AV	334.00	150	Horizontal	Pass
6	17234.551	49.46	-0.50	74.0	24.54	Peak	348.00	150	Horizontal	Pass

	辐射杂散 Radiated Spurious Emissions	文件编号(No.):	ECTR4-R21
		版本(Version):	V1.0


6**	17234.551	39.02	-0.50	54.0	14.98	AV	348.00	150	Horizontal	Pass
-----	-----------	-------	-------	------	-------	----	--------	-----	------------	------

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-28_02.39.46

EUT Name:	Mobile Computer	Temp.(°C):	22.6
Model Number:	RS20	Humidity (%RH):	51
Sample Number:	CC26030105-001-S12	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(5G)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A11+数据线: A45

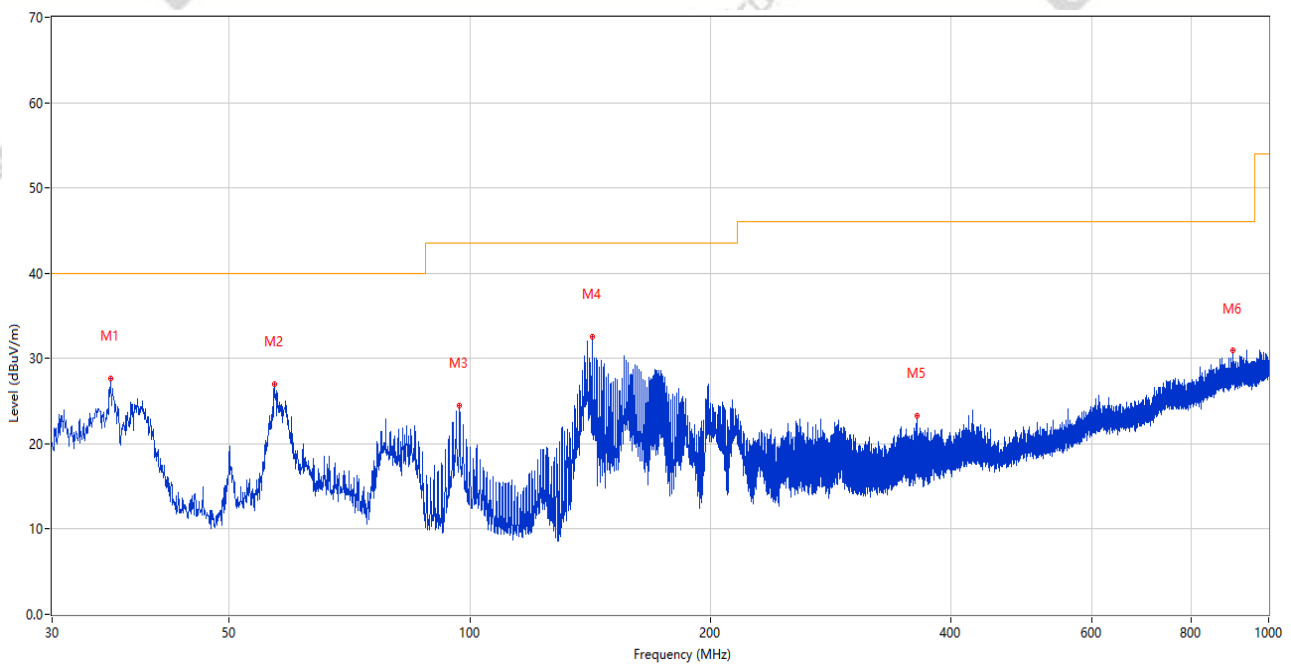

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.480	27.62	-27.57	40.0	12.38	Peak	157.00	100	Vertical	Pass
2	56.917	26.97	-25.39	40.0	13.03	Peak	301.00	100	Vertical	Pass
3	97.124	24.49	-26.34	43.5	19.01	Peak	145.00	100	Vertical	Pass
4	142.229	32.55	-29.54	43.5	10.95	Peak	252.00	100	Vertical	Pass
5	362.565	23.34	-21.73	46.0	22.66	Peak	356.00	100	Vertical	Pass
6	903.097	30.94	-9.20	46.0	15.06	Peak	199.00	100	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-28_02.37.06

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45

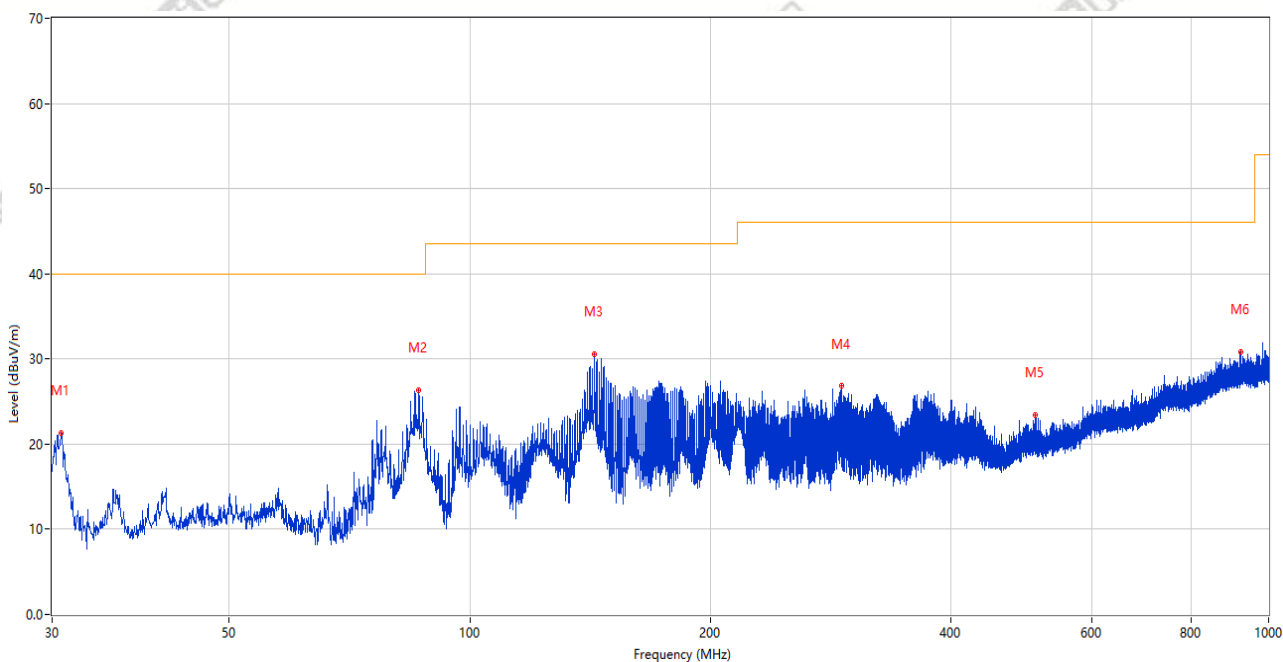

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.776	21.25	-29.05	40.0	18.75	Peak	203.00	200	Horizontal	Pass
2	86.357	26.40	-29.26	40.0	13.60	Peak	4.00	200	Horizontal	Pass
3	143.248	30.58	-29.57	43.5	12.92	Peak	239.00	200	Horizontal	Pass
4	292.288	26.81	-23.19	46.0	19.19	Peak	46.00	100	Horizontal	Pass
5	510.247	23.46	-17.69	46.0	22.54	Peak	84.00	200	Horizontal	Pass
6	922.303	30.89	-9.11	46.0	15.11	Peak	217.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_15.12.56

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=11


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

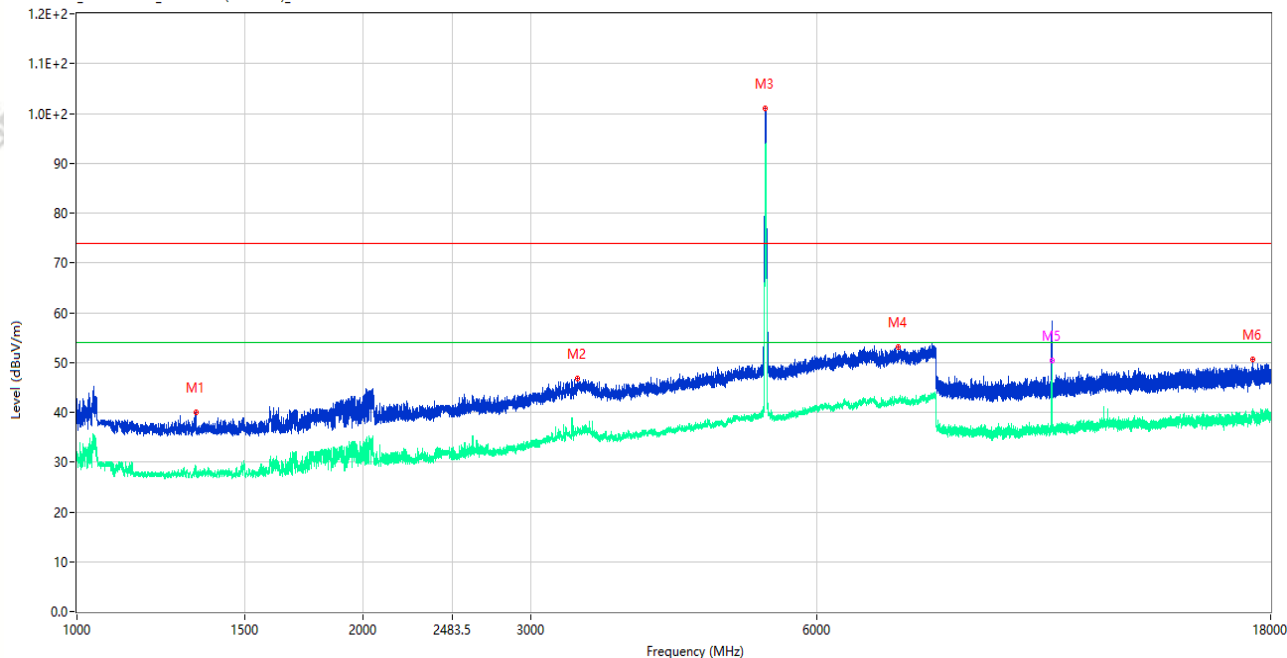

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.000	39.96	-16.01	74.0	34.04	Peak	117.00	150	Vertical	Pass
1**	1333.000	29.09	-16.01	54.0	24.91	AV	117.00	150	Vertical	Pass
2	3362.500	46.81	-5.50	74.0	27.19	Peak	185.00	150	Vertical	Pass
2**	3362.500	36.54	-5.50	54.0	17.46	AV	185.00	150	Vertical	Pass
3	5299.000	100.98	-2.01	74.0	-26.98	Peak	173.00	150	Vertical	N/A
3**	5299.000	93.75	-2.01	54.0	-39.75	AV	173.00	150	Vertical	N/A
4	7313.000	53.18	0.66	74.0	20.82	Peak	96.00	150	Vertical	Pass
4**	7313.000	42.67	0.66	54.0	11.33	AV	96.00	150	Vertical	Pass
5	10596.350	56.54	-3.60	74.0	17.46	Peak	348.00	150	Vertical	Pass
5**	10596.350	50.33	-3.60	54.0	3.67	AV	348.00	150	Vertical	Pass
6	17234.813	50.51	-0.51	74.0	23.49	Peak	360.00	150	Vertical	Pass
6**	17234.813	39.63	-0.51	54.0	14.37	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_15.17.24

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=11


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

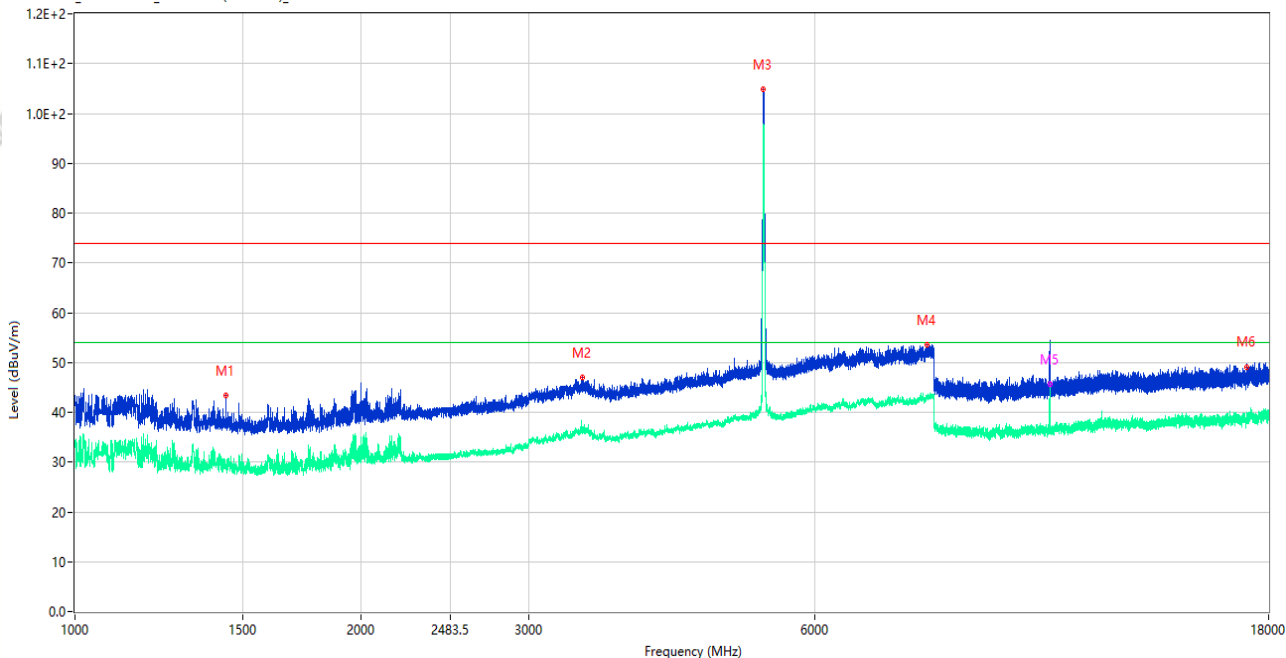

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.000	43.42	-15.95	74.0	30.58	Peak	51.00	150	Horizontal	Pass
1**	1440.000	28.82	-15.95	54.0	25.18	AV	51.00	150	Horizontal	Pass
2	3415.000	46.94	-5.19	74.0	27.06	Peak	360.00	150	Horizontal	Pass
2**	3415.000	36.45	-5.19	54.0	17.55	AV	360.00	150	Horizontal	Pass
3	5299.500	104.84	-2.02	74.0	-30.84	Peak	66.00	150	Horizontal	N/A
3**	5299.500	97.74	-2.02	54.0	-43.74	AV	66.00	150	Horizontal	N/A
4	7862.000	53.55	1.71	74.0	20.45	Peak	117.00	150	Horizontal	Pass
4**	7862.000	42.71	1.71	54.0	11.29	AV	117.00	150	Horizontal	Pass
5	10598.487	54.55	-3.67	74.0	19.45	Peak	331.00	150	Horizontal	Pass
5**	10598.487	45.70	-3.67	54.0	8.30	AV	331.00	150	Horizontal	Pass
6	17092.275	49.13	-0.66	74.0	24.87	Peak	360.00	150	Horizontal	Pass
6**	17092.275	38.29	-0.66	54.0	15.71	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_15.44.26

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n20 CH60 P=11


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

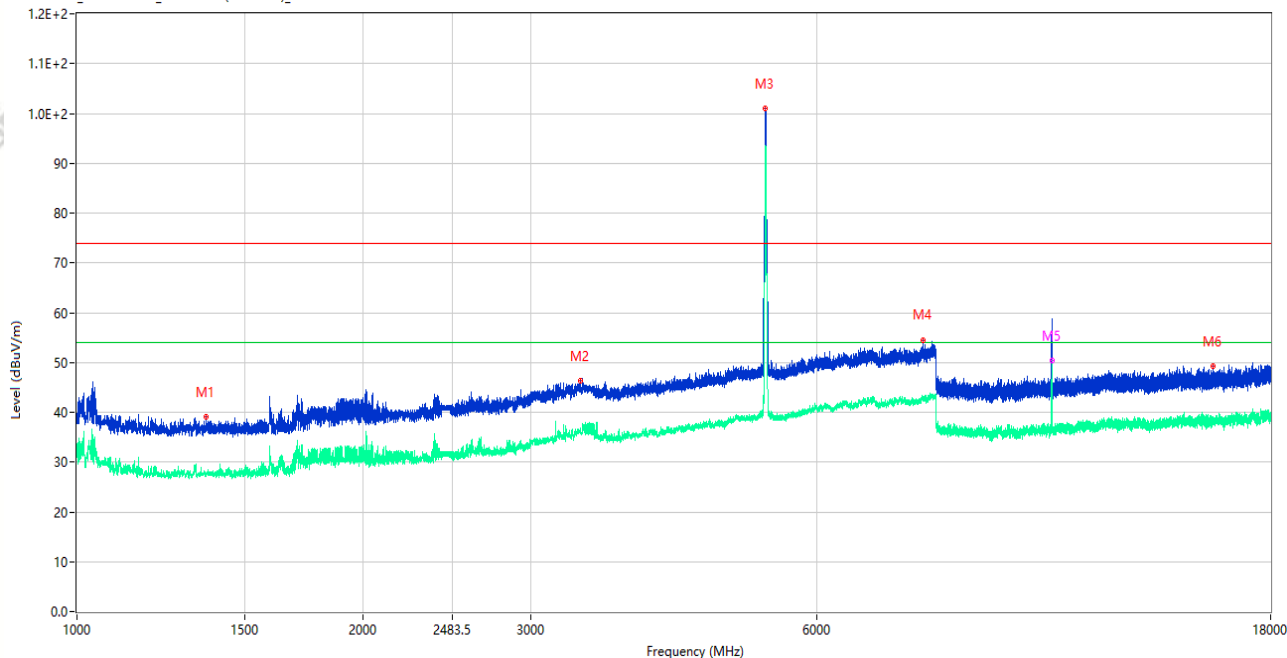

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1368.500	39.14	-15.91	74.0	34.86	Peak	360.00	150	Vertical	Pass
1**	1368.500	27.32	-15.91	54.0	26.68	AV	360.00	150	Vertical	Pass
2	3380.500	46.42	-5.13	74.0	27.58	Peak	0.00	150	Vertical	Pass
2**	3380.500	36.34	-5.13	54.0	17.66	AV	0.00	150	Vertical	Pass
3	5299.000	100.96	-2.01	74.0	-26.96	Peak	176.00	150	Vertical	N/A
3**	5299.000	93.08	-2.01	54.0	-39.08	AV	176.00	150	Vertical	N/A
4	7749.500	54.57	1.50	74.0	19.43	Peak	215.00	150	Vertical	Pass
4**	7749.500	42.56	1.50	54.0	11.44	AV	215.00	150	Vertical	Pass
5	10600.388	56.10	-3.67	74.0	17.90	Peak	309.00	150	Vertical	Pass
5**	10600.388	50.32	-3.67	54.0	3.68	AV	309.00	150	Vertical	Pass
6	15645.375	49.24	-1.74	74.0	24.76	Peak	80.00	150	Vertical	Pass
6**	15645.375	38.51	-1.74	54.0	15.49	AV	80.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_15.48.31

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n20 CH60 P=11


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

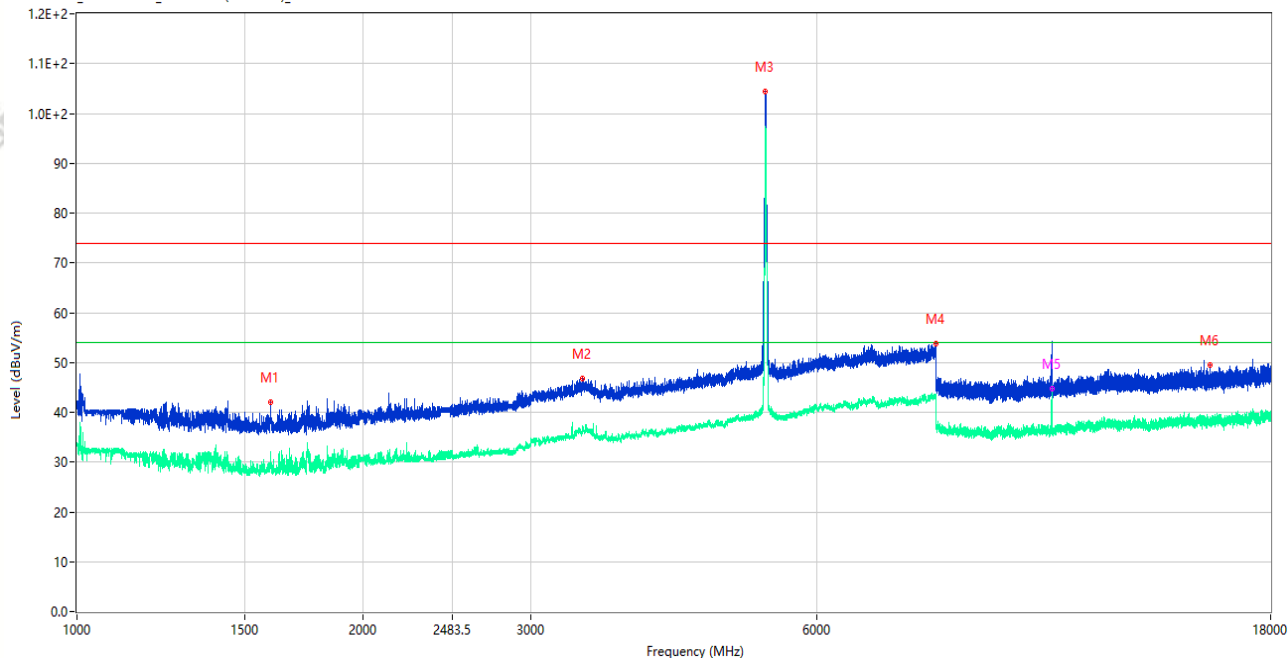

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1598.500	42.08	-16.22	74.0	31.92	Peak	151.00	150	Horizontal	Pass
1**	1598.500	31.39	-16.22	54.0	22.61	AV	151.00	150	Horizontal	Pass
2	3402.000	46.76	-5.58	74.0	27.24	Peak	228.00	150	Horizontal	Pass
2**	3402.000	37.18	-5.58	54.0	16.82	AV	228.00	150	Horizontal	Pass
3	5297.000	104.43	-2.01	74.0	-30.43	Peak	80.00	150	Horizontal	N/A
3**	5297.000	96.00	-2.01	54.0	-42.00	AV	80.00	150	Horizontal	N/A
4	8000.000	53.68	1.95	74.0	20.32	Peak	296.00	150	Horizontal	Pass
4**	8000.000	42.88	1.95	54.0	11.12	AV	296.00	150	Horizontal	Pass
5	10606.800	49.65	-3.68	74.0	24.35	Peak	333.00	150	Horizontal	Pass
5**	10606.800	44.65	-3.68	54.0	9.35	AV	333.00	150	Horizontal	Pass
6	15559.537	49.40	-2.73	74.0	24.60	Peak	14.00	150	Horizontal	Pass
6**	15559.537	38.30	-2.73	54.0	15.70	AV	14.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_19.23.18

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n40 CH54 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

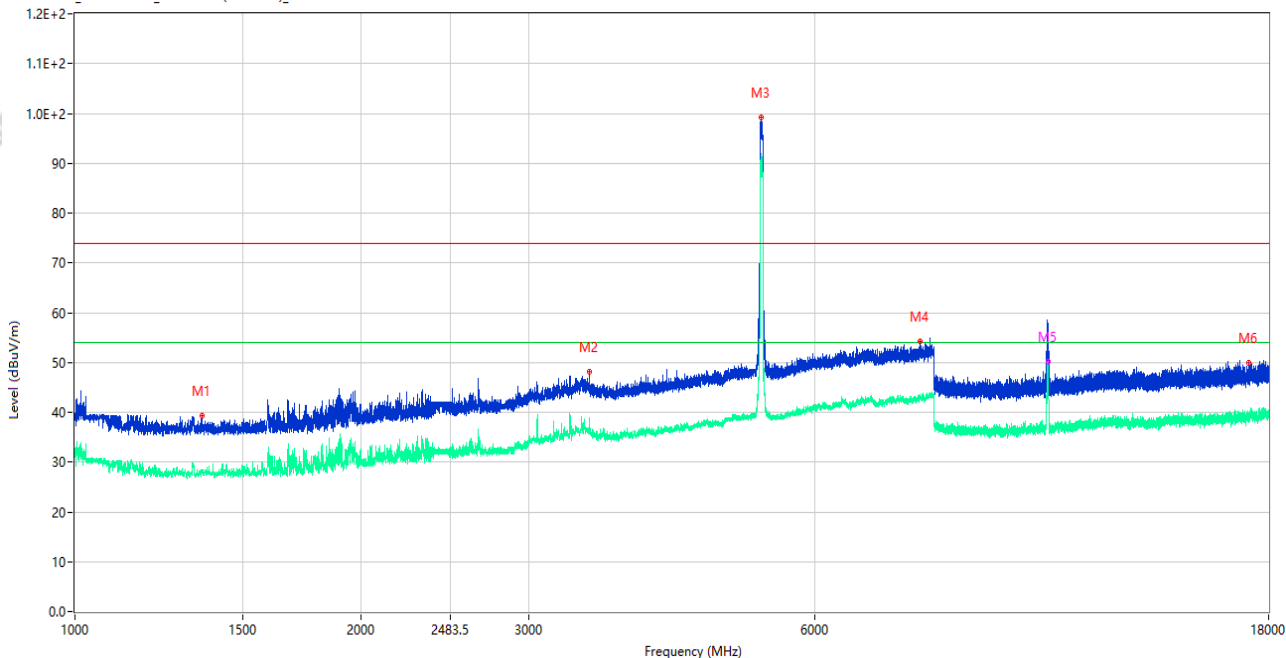

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1359.000	39.23	-15.86	74.0	34.77	Peak	185.00	150	Vertical	Pass
1**	1359.000	27.78	-15.86	54.0	26.22	AV	185.00	150	Vertical	Pass
2	3477.500	48.20	-6.22	74.0	25.80	Peak	173.00	150	Vertical	Pass
2**	3477.500	38.52	-6.22	54.0	15.48	AV	173.00	150	Vertical	Pass
3	5265.000	99.16	-2.37	74.0	-25.16	Peak	173.00	150	Vertical	N/A
3**	5265.000	91.29	-2.37	54.0	-37.29	AV	173.00	150	Vertical	Fail
4	7742.000	54.16	1.32	74.0	19.84	Peak	360.00	150	Vertical	Pass
4**	7742.000	43.14	1.32	54.0	10.86	AV	360.00	150	Vertical	Pass
5	10548.850	55.59	-3.12	74.0	18.41	Peak	333.00	150	Vertical	Pass
5**	10548.850	50.13	-3.12	54.0	3.87	AV	333.00	150	Vertical	Pass
6	17134.537	49.97	-0.26	74.0	24.03	Peak	346.00	150	Vertical	Pass
6**	17134.537	38.72	-0.26	54.0	15.28	AV	346.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_19.27.18

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n40 CH54 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

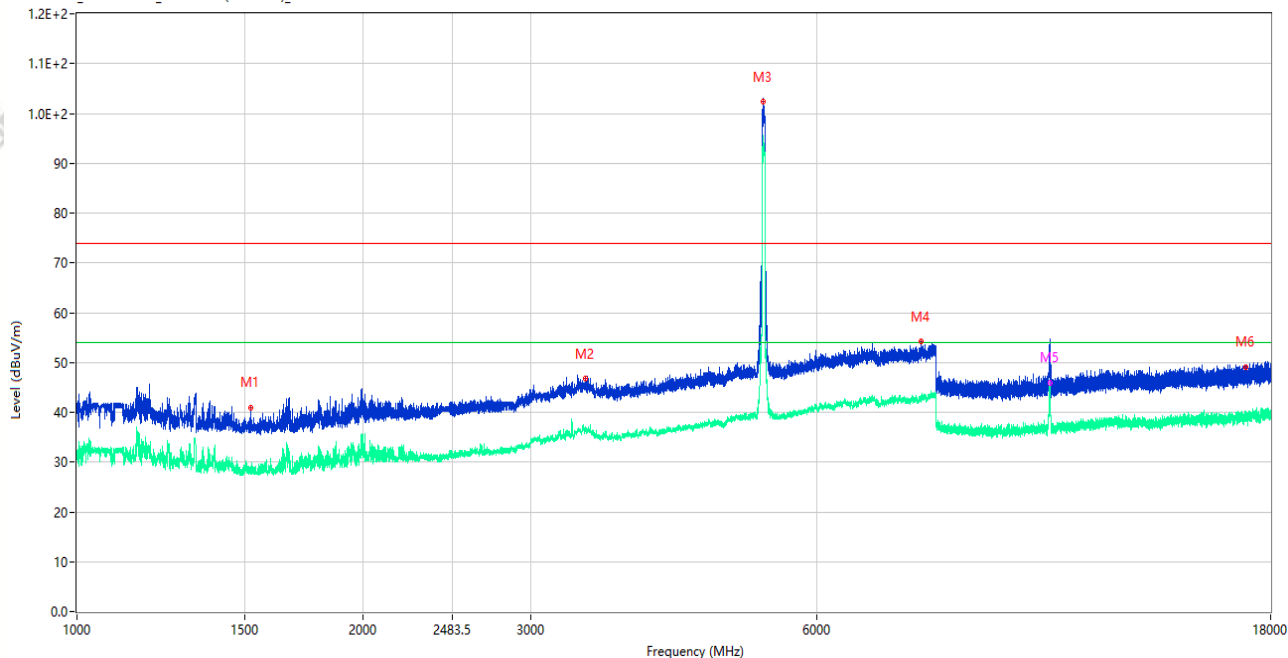

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1523.000	41.01	-16.07	74.0	32.99	Peak	223.00	150	Horizontal	Pass
1**	1523.000	29.06	-16.07	54.0	24.94	AV	223.00	150	Horizontal	Pass
2	3427.500	46.76	-4.93	74.0	27.24	Peak	360.00	150	Horizontal	Pass
2**	3427.500	35.98	-4.93	54.0	18.02	AV	360.00	150	Horizontal	Pass
3	5266.000	99.19	-2.38	74.0	-25.19	Peak	203.00	150	Horizontal	N/A
3**	5266.000	91.70	-2.38	54.0	-37.70	AV	203.00	150	Horizontal	Fail
4	7727.500	54.22	0.83	74.0	19.78	Peak	224.00	150	Horizontal	Pass
4**	7727.500	42.90	0.83	54.0	11.10	AV	224.00	150	Horizontal	Pass
5	10546.713	50.88	-3.07	74.0	23.12	Peak	308.00	150	Horizontal	Pass
5**	10546.713	45.81	-3.07	54.0	8.19	AV	308.00	150	Horizontal	Pass
6	16930.838	49.14	-1.16	74.0	24.86	Peak	280.00	150	Horizontal	Pass
6**	16930.838	39.00	-1.16	54.0	15.00	AV	280.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_16.30.44

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

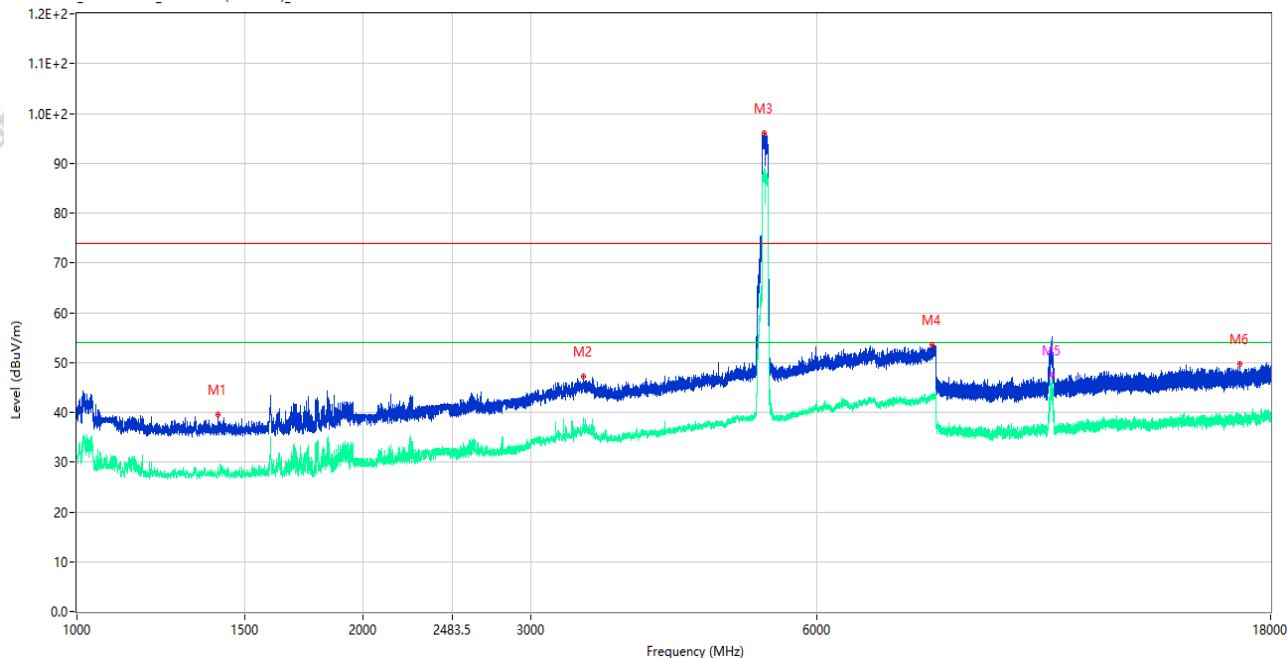

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1407.500	39.45	-15.98	74.0	34.55	Peak	152.00	150	Vertical	Pass
1**	1407.500	28.14	-15.98	54.0	25.86	AV	152.00	150	Vertical	Pass
2	3407.500	47.30	-5.33	74.0	26.70	Peak	121.00	150	Vertical	Pass
2**	3407.500	38.94	-5.33	54.0	15.06	AV	121.00	150	Vertical	Pass
3	5284.000	96.10	-2.17	74.0	-22.10	Peak	172.00	150	Vertical	N/A
3**	5284.000	88.07	-2.17	54.0	-34.07	AV	172.00	150	Vertical	N/A
4	7931.000	53.49	2.06	74.0	20.51	Peak	221.00	150	Vertical	Pass
4**	7931.000	43.19	2.06	54.0	10.81	AV	221.00	150	Vertical	Pass
5	10609.175	51.11	-3.85	74.0	22.89	Peak	358.00	150	Vertical	Pass
5**	10609.175	47.43	-3.85	54.0	6.57	AV	358.00	150	Vertical	Pass
6	16711.912	49.63	-1.57	74.0	24.37	Peak	360.00	150	Vertical	Pass
6**	16711.912	37.90	-1.57	54.0	16.10	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_16.34.43

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

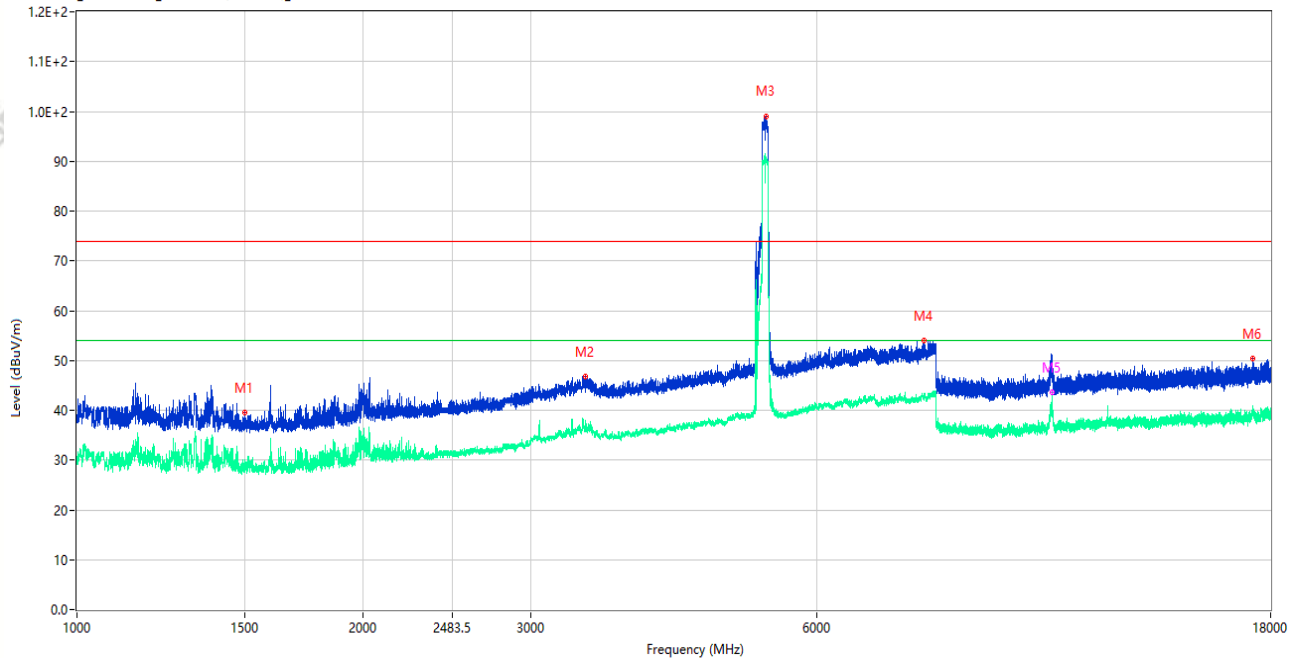

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1503.000	39.45	-16.09	74.0	34.55	Peak	131.00	150	Horizontal	Pass
1**	1503.000	28.65	-16.09	54.0	25.35	AV	131.00	150	Horizontal	Pass
2	3424.500	46.79	-4.92	74.0	27.21	Peak	65.00	150	Horizontal	Pass
2**	3424.500	36.47	-4.92	54.0	17.53	AV	65.00	150	Horizontal	Pass
3	5307.500	99.07	-2.00	74.0	-25.07	Peak	75.00	150	Horizontal	N/A
3**	5307.500	90.49	-2.00	54.0	-36.49	AV	75.00	150	Horizontal	N/A
4	7768.000	54.10	1.30	74.0	19.90	Peak	144.00	150	Horizontal	Pass
4**	7768.000	42.36	1.30	54.0	11.64	AV	144.00	150	Horizontal	Pass
5	10601.575	48.61	-3.67	74.0	25.39	Peak	50.00	150	Horizontal	Pass
5**	10601.575	43.52	-3.67	54.0	10.48	AV	50.00	150	Horizontal	Pass
6	17252.661	50.34	-0.75	74.0	23.66	Peak	278.00	150	Horizontal	Pass
6**	17252.661	40.17	-0.75	54.0	13.83	AV	278.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_16.53.37

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax20 CH60 P=10


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

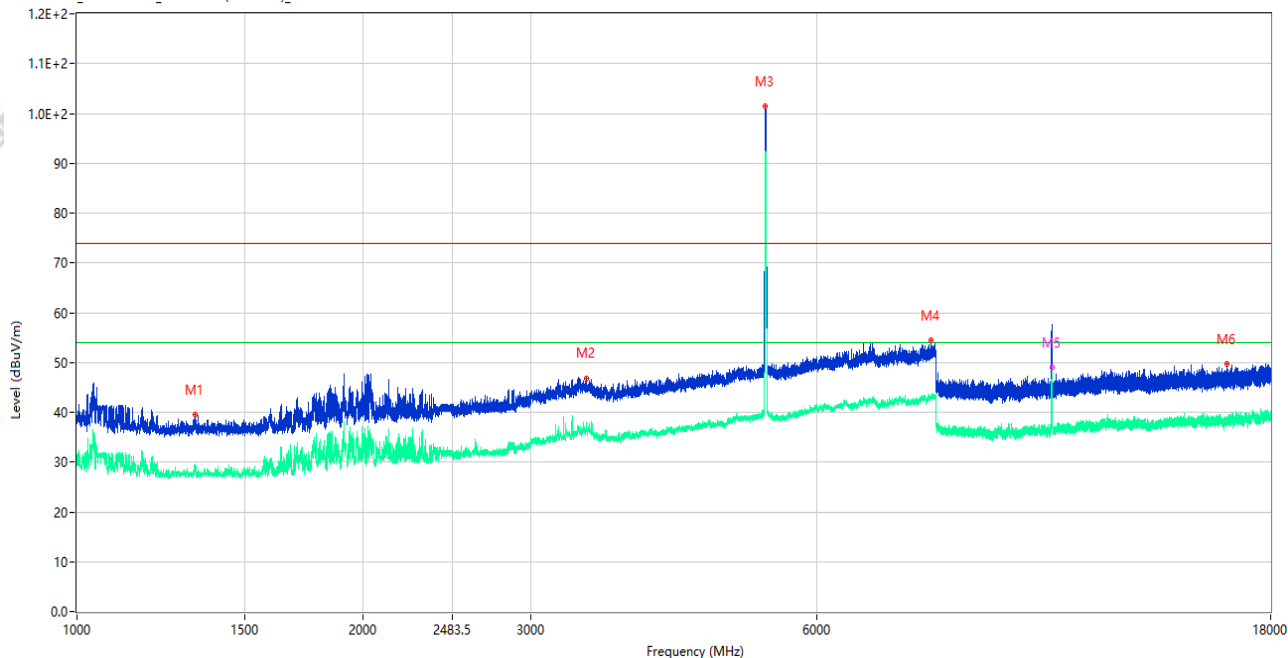

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.750	39.46	-16.01	74.0	34.54	Peak	126.00	150	Vertical	Pass
1**	1332.750	29.68	-16.01	54.0	24.32	AV	126.00	150	Vertical	Pass
2	3433.500	46.89	-5.15	74.0	27.11	Peak	241.00	150	Vertical	Pass
2**	3433.500	36.13	-5.15	54.0	17.87	AV	241.00	150	Vertical	Pass
3	5297.000	101.42	-2.01	74.0	-27.42	Peak	132.00	150	Vertical	N/A
3**	5297.000	91.34	-2.01	54.0	-37.34	AV	132.00	150	Vertical	Fail
4	7916.500	54.55	1.88	74.0	19.45	Peak	349.00	150	Vertical	Pass
4**	7916.500	42.63	1.88	54.0	11.37	AV	349.00	150	Vertical	Pass
5	10605.138	57.70	-3.65	74.0	16.30	Peak	332.00	150	Vertical	Pass
5**	10605.138	49.12	-3.65	54.0	4.88	AV	332.00	150	Vertical	Pass
6	16180.088	49.77	-1.27	74.0	24.23	Peak	110.00	150	Vertical	Pass
6**	16180.088	38.37	-1.27	54.0	15.63	AV	110.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_16.57.55

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax20 CH60 P=10


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

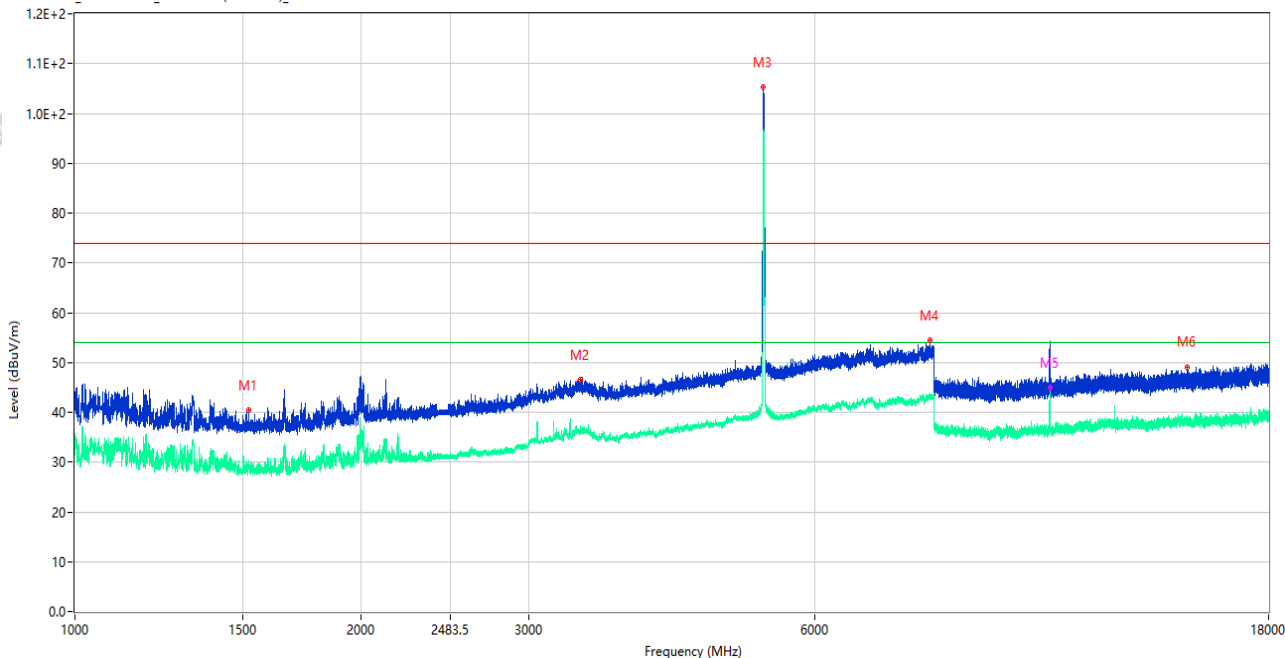

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1522.250	40.37	-16.08	74.0	33.63	Peak	155.00	150	Horizontal	Pass
1**	1522.250	29.53	-16.08	54.0	24.47	AV	155.00	150	Horizontal	Pass
2	3403.500	46.47	-5.52	74.0	27.53	Peak	94.00	150	Horizontal	Pass
2**	3403.500	36.41	-5.52	54.0	17.59	AV	94.00	150	Horizontal	Pass
3	5299.000	105.33	-2.01	74.0	-31.33	Peak	75.00	150	Horizontal	N/A
3**	5299.000	96.08	-2.01	54.0	-42.08	AV	75.00	150	Horizontal	Fail
4	7918.500	54.37	1.94	74.0	19.63	Peak	172.00	150	Horizontal	Pass
4**	7918.500	43.13	1.94	54.0	10.87	AV	172.00	150	Horizontal	Pass
5	10595.401	50.60	-3.55	74.0	23.40	Peak	333.00	150	Horizontal	Pass
5**	10595.401	45.01	-3.55	54.0	8.99	AV	333.00	150	Horizontal	Pass
6	14788.050	49.13	-0.63	74.0	24.87	Peak	360.00	150	Horizontal	Pass
6**	14788.050	37.08	-0.63	54.0	16.92	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_19.46.38

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax40 CH54 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

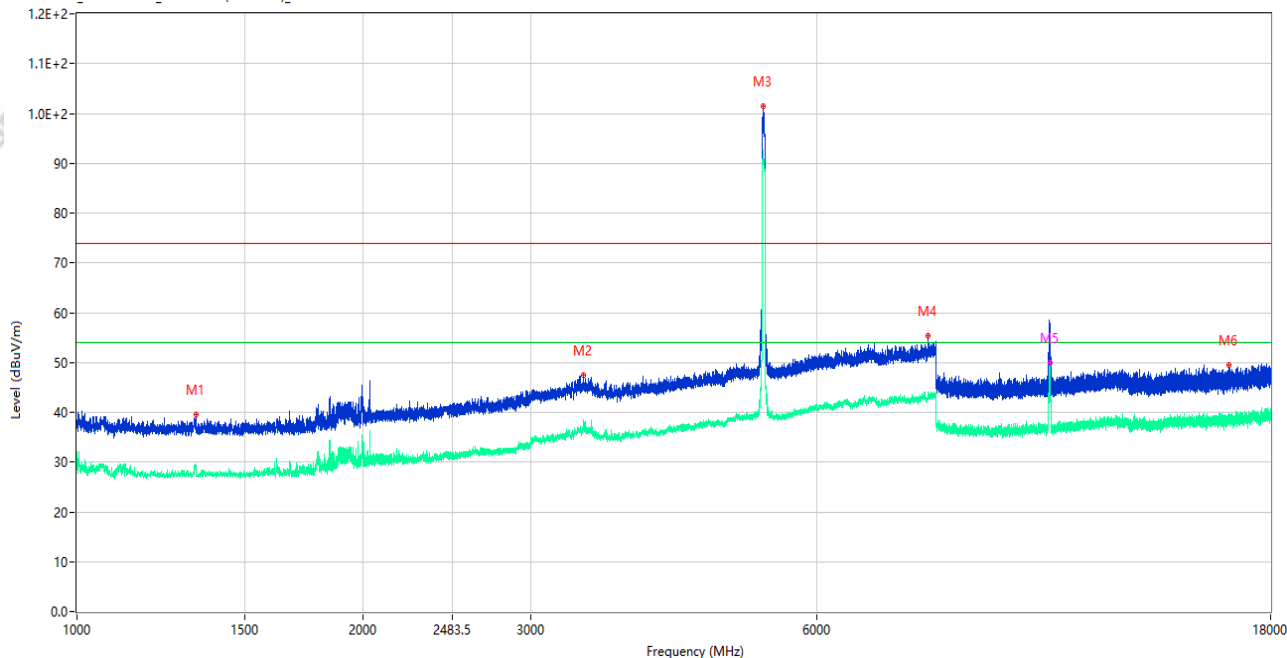

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.250	39.45	-16.02	74.0	34.55	Peak	124.00	150	Vertical	Pass
1**	1333.250	29.47	-16.02	54.0	24.53	AV	124.00	150	Vertical	Pass
2	3405.500	47.35	-5.43	74.0	26.65	Peak	360.00	150	Vertical	Pass
2**	3405.500	36.55	-5.43	54.0	17.45	AV	360.00	150	Vertical	Pass
3	5268.500	101.47	-2.44	74.0	-27.47	Peak	182.00	150	Vertical	N/A
3**	5268.500	92.55	-2.44	54.0	-38.55	AV	182.00	150	Vertical	Fail
4	7852.000	55.44	1.49	74.0	18.56	Peak	4.00	150	Vertical	Pass
4**	7852.000	43.08	1.49	54.0	10.92	AV	4.00	150	Vertical	Pass
5	10550.988	56.25	-3.17	74.0	17.75	Peak	309.00	150	Vertical	Pass
5**	10550.988	49.96	-3.17	54.0	4.04	AV	309.00	150	Vertical	Pass
6	16282.724	49.51	-1.54	74.0	24.49	Peak	0.00	150	Vertical	Pass
6**	16282.724	38.96	-1.54	54.0	15.04	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_19.50.05

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax40 CH54 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

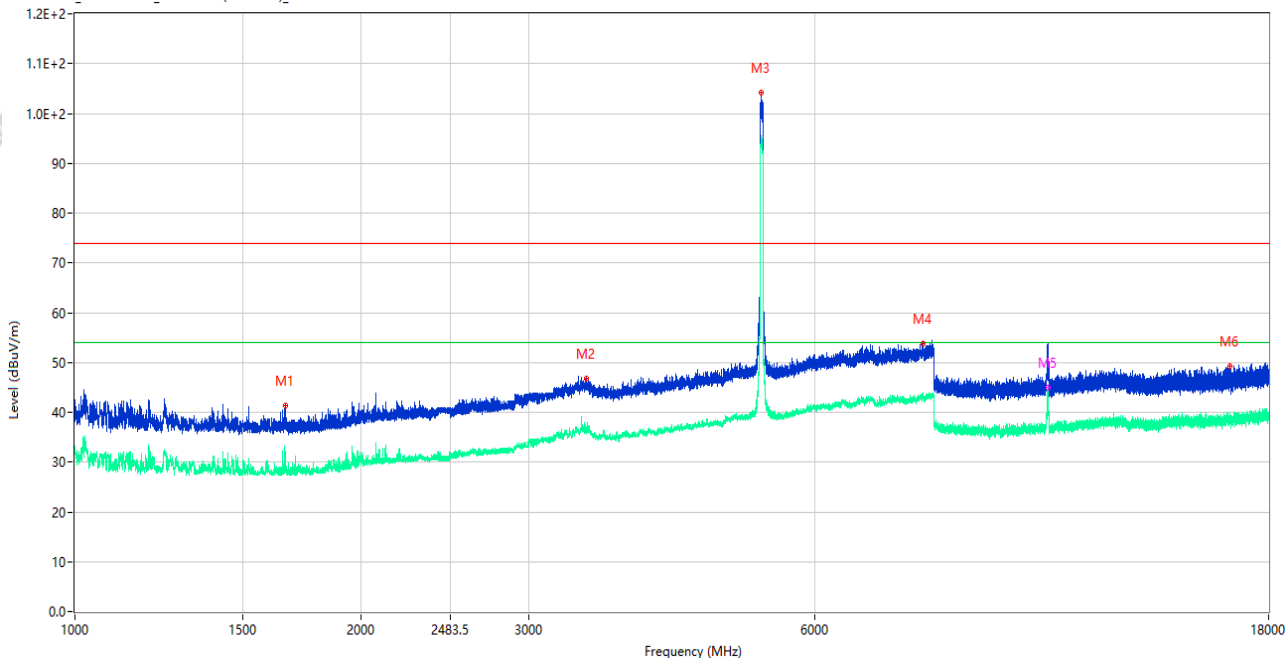

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1663.500	41.30	-16.23	74.0	32.70	Peak	173.00	150	Horizontal	Pass
1**	1663.500	31.95	-16.23	54.0	22.05	AV	173.00	150	Horizontal	Pass
2	3450.000	46.70	-4.99	74.0	27.30	Peak	0.00	150	Horizontal	Pass
2**	3450.000	36.18	-4.99	54.0	17.82	AV	0.00	150	Horizontal	Pass
3	5268.500	104.15	-2.44	74.0	-30.15	Peak	60.00	150	Horizontal	N/A
3**	5268.500	95.21	-2.44	54.0	-41.21	AV	60.00	150	Horizontal	Fail
4	7799.000	53.78	1.64	74.0	20.22	Peak	359.00	150	Horizontal	Pass
4**	7799.000	43.59	1.64	54.0	10.41	AV	359.00	150	Horizontal	Pass
5	10545.287	51.50	-3.06	74.0	22.50	Peak	334.00	150	Horizontal	Pass
5**	10545.287	45.04	-3.06	54.0	8.96	AV	334.00	150	Horizontal	Pass
6	16380.637	49.27	-1.36	74.0	24.73	Peak	0.00	150	Horizontal	Pass
6**	16380.637	38.42	-1.36	54.0	15.58	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_17.10.00

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax80 CH58 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

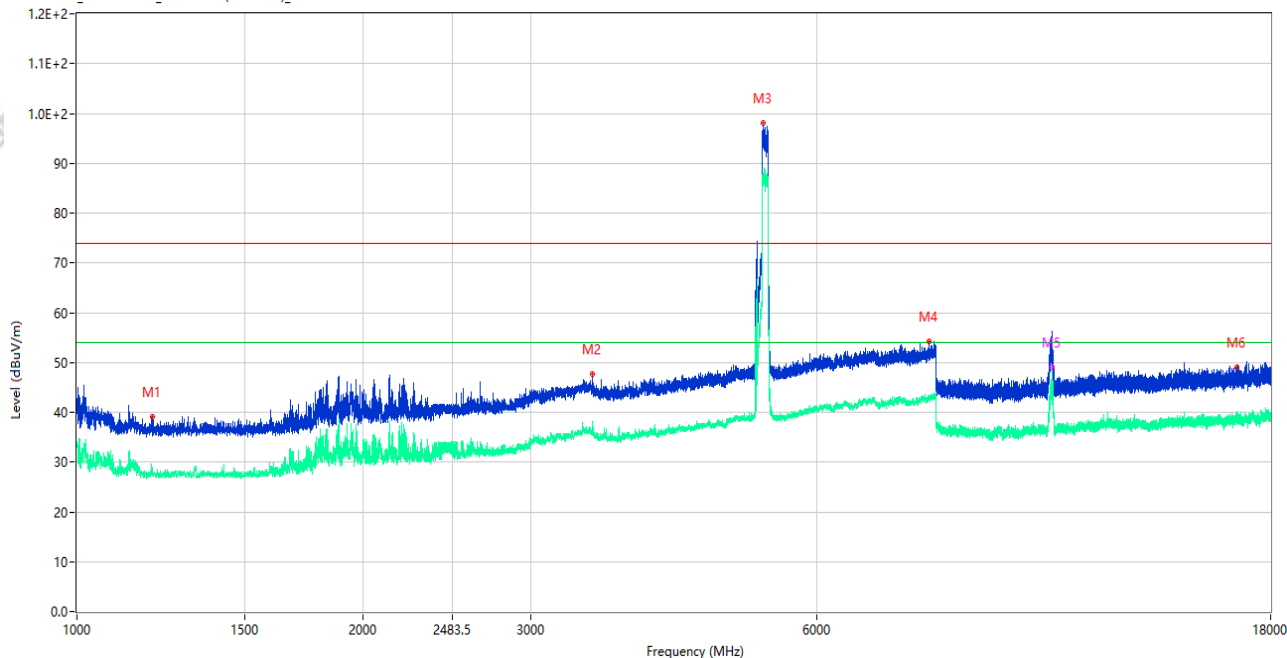

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1200.500	39.09	-15.75	74.0	34.91	Peak	17.00	150	Vertical	Pass
1**	1200.500	27.39	-15.75	54.0	26.61	AV	17.00	150	Vertical	Pass
2	3480.000	47.75	-6.25	74.0	26.25	Peak	175.00	150	Vertical	Pass
2**	3480.000	36.96	-6.25	54.0	17.04	AV	175.00	150	Vertical	Pass
3	5262.000	98.00	-2.23	74.0	-24.00	Peak	175.00	150	Vertical	N/A
3**	5262.000	87.85	-2.23	54.0	-33.85	AV	175.00	150	Vertical	N/A
4	7869.000	54.22	1.79	74.0	19.78	Peak	360.00	150	Vertical	Pass
4**	7869.000	43.40	1.79	54.0	10.60	AV	360.00	150	Vertical	Pass
5	10599.200	53.75	-3.67	74.0	20.25	Peak	360.00	150	Vertical	Pass
5**	10599.200	49.11	-3.67	54.0	4.89	AV	360.00	150	Vertical	Pass
6	16574.887	48.99	-0.70	74.0	25.01	Peak	345.00	150	Vertical	Pass
6**	16574.887	38.31	-0.70	54.0	15.69	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_17.14.15

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax80 CH58 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

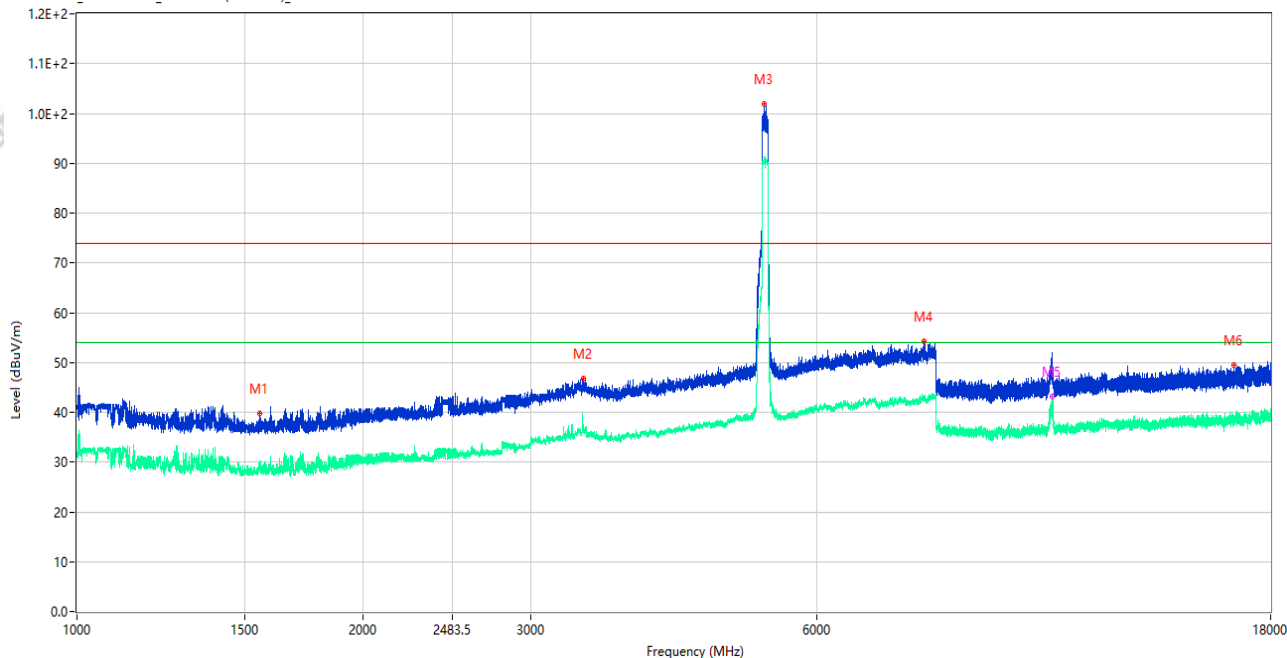

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1557.500	39.87	-16.04	74.0	34.13	Peak	224.00	150	Horizontal	Pass
1**	1557.500	29.54	-16.04	54.0	24.46	AV	224.00	150	Horizontal	Pass
2	3407.500	46.79	-5.33	74.0	27.21	Peak	120.00	150	Horizontal	Pass
2**	3407.500	37.09	-5.33	54.0	16.91	AV	120.00	150	Horizontal	Pass
3	5282.500	101.82	-2.23	74.0	-27.82	Peak	51.00	150	Horizontal	N/A
3**	5282.500	91.21	-2.23	54.0	-37.21	AV	51.00	150	Horizontal	N/A
4	7784.000	54.25	1.52	74.0	19.75	Peak	250.00	150	Horizontal	Pass
4**	7784.000	43.27	1.52	54.0	10.73	AV	250.00	150	Horizontal	Pass
5	10606.325	47.46	-3.64	74.0	26.54	Peak	335.00	150	Horizontal	Pass
5**	10606.325	43.09	-3.64	54.0	10.91	AV	335.00	150	Horizontal	Pass
6	16485.113	49.38	-2.24	74.0	24.62	Peak	346.00	150	Horizontal	Pass
6**	16485.113	38.08	-2.24	54.0	15.92	AV	346.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_11.55.50

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

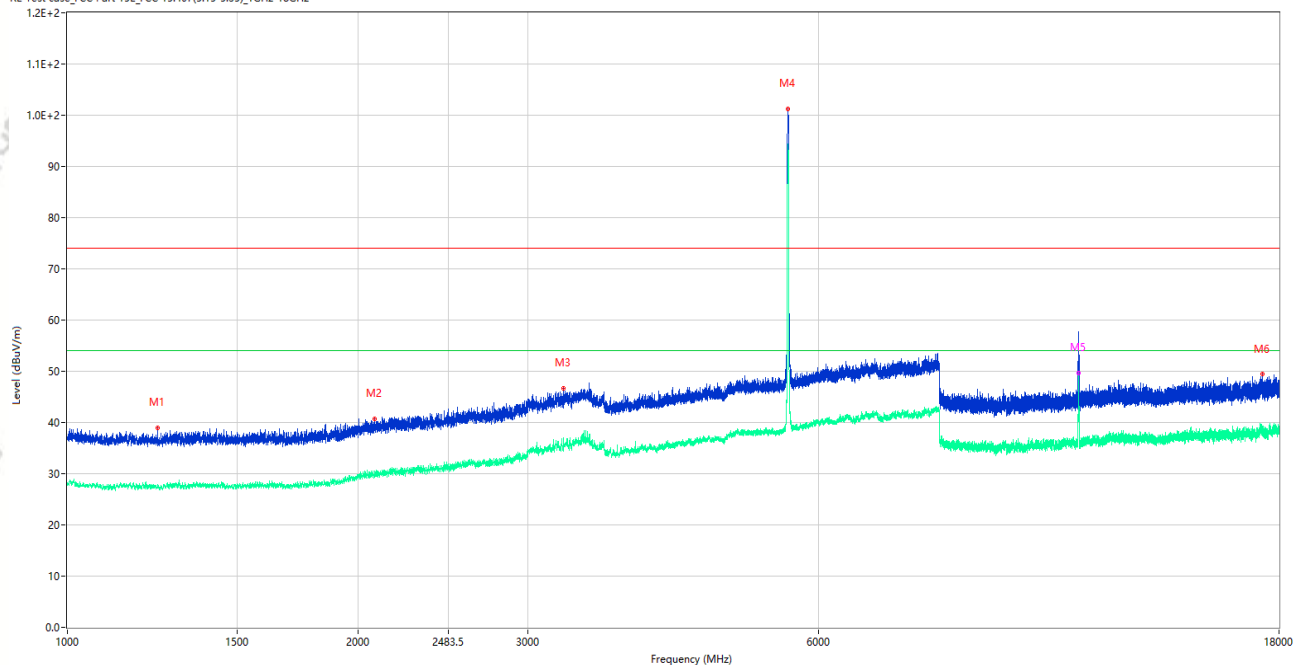

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1240.500	39.02	-16.06	74.0	34.98	Peak	248.00	150	Vertical	Pass
1**	1240.500	27.40	-16.06	54.0	26.60	AV	248.00	150	Vertical	Pass
2	2082.500	40.72	-13.82	74.0	33.28	Peak	70.00	150	Vertical	Pass
2**	2082.500	30.32	-13.82	54.0	23.68	AV	70.00	150	Vertical	Pass
3	3267.000	46.64	-6.88	74.0	27.36	Peak	359.00	150	Vertical	Pass
3**	3267.000	36.81	-6.88	54.0	17.19	AV	359.00	150	Vertical	Pass
4	5581.500	101.29	-2.85	74.0	-27.29	Peak	89.00	150	Vertical	N/A
4**	5581.500	94.05	-2.85	54.0	-40.05	AV	89.00	150	Vertical	N/A
5	11161.600	54.52	-4.03	74.0	19.48	Peak	262.00	150	Vertical	Pass
5**	11161.600	49.65	-4.03	54.0	4.35	AV	262.00	150	Vertical	Pass
6	17288.886	49.46	-1.27	74.0	24.54	Peak	284.00	150	Vertical	Pass
6**	17288.886	37.90	-1.27	54.0	16.10	AV	284.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_11.48.05

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

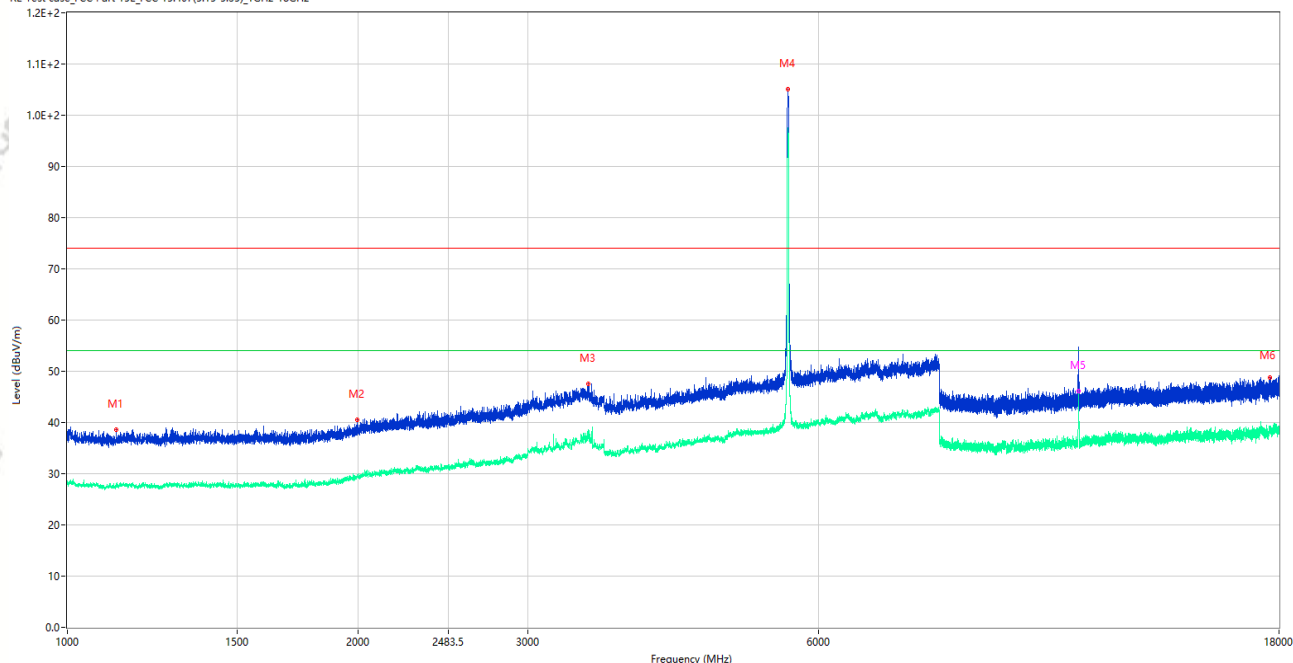

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1124.250	38.65	-15.66	74.0	35.35	Peak	40.00	150	Horizontal	Pass
1**	1124.250	27.83	-15.66	54.0	26.17	AV	40.00	150	Horizontal	Pass
2	1995.000	40.52	-14.54	74.0	33.48	Peak	338.00	150	Horizontal	Pass
2**	1995.000	29.35	-14.54	54.0	24.65	AV	338.00	150	Horizontal	Pass
3	3462.500	47.53	-5.06	74.0	26.47	Peak	138.00	150	Horizontal	Pass
3**	3462.500	36.81	-5.06	54.0	17.19	AV	138.00	150	Horizontal	Pass
4	5581.500	105.15	-2.85	74.0	-31.15	Peak	358.00	150	Horizontal	N/A
4**	5581.500	97.59	-2.85	54.0	-43.59	AV	358.00	150	Horizontal	N/A
5	11159.700	51.31	-4.02	74.0	22.69	Peak	286.00	150	Horizontal	Pass
5**	11159.700	46.22	-4.02	54.0	7.78	AV	286.00	150	Horizontal	Pass
6	17612.026	48.76	0.27	74.0	25.24	Peak	114.00	150	Horizontal	Pass
6**	17612.026	38.15	0.27	54.0	15.85	AV	114.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_12.07.08

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n20 CH116 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

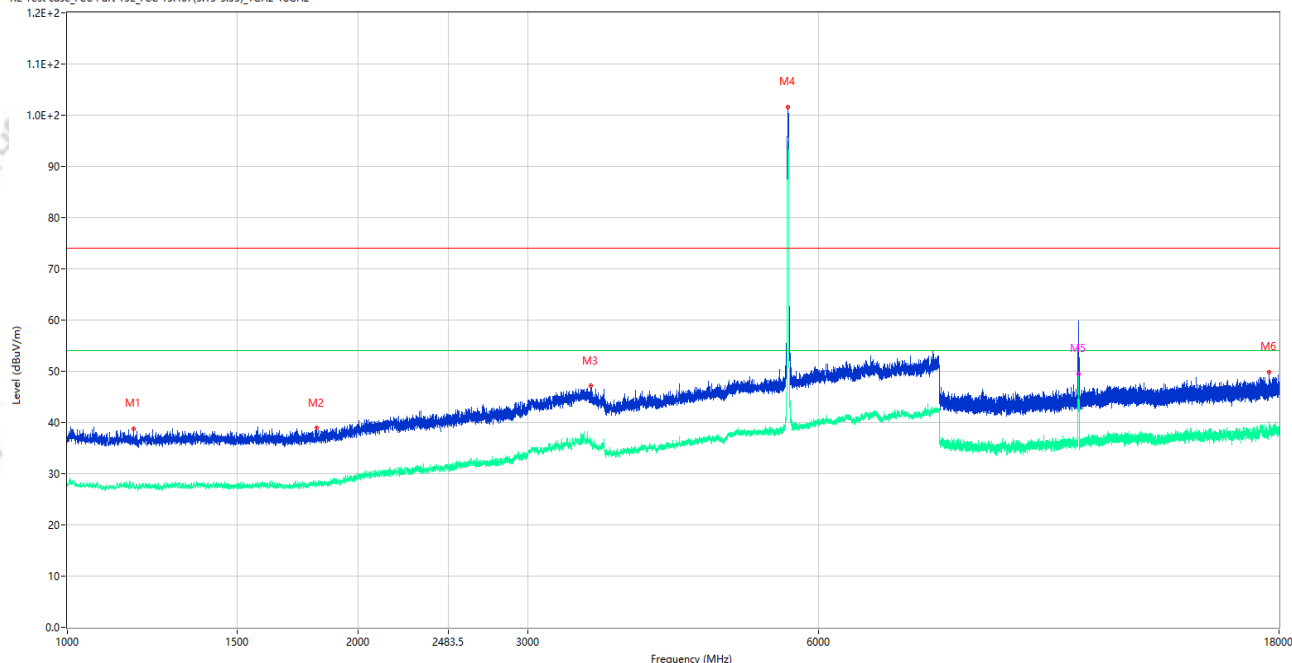

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1170.750	38.81	-15.53	74.0	35.19	Peak	141.00	150	Vertical	Pass
1**	1170.750	28.09	-15.53	54.0	25.91	AV	141.00	150	Vertical	Pass
2	1810.750	38.96	-15.98	74.0	35.04	Peak	360.00	150	Vertical	Pass
2**	1810.750	28.28	-15.98	54.0	25.72	AV	360.00	150	Vertical	Pass
3	3488.000	47.26	-5.92	74.0	26.74	Peak	217.00	150	Vertical	Pass
3**	3488.000	35.51	-5.92	54.0	18.49	AV	217.00	150	Vertical	Pass
4	5581.500	101.66	-2.85	74.0	-27.66	Peak	78.00	150	Vertical	N/A
4**	5581.500	94.42	-2.85	54.0	-40.42	AV	78.00	150	Vertical	N/A
5	11158.038	55.86	-4.02	74.0	18.14	Peak	260.00	150	Vertical	Pass
5**	11158.038	49.54	-4.02	54.0	4.46	AV	260.00	150	Vertical	Pass
6	17590.499	49.85	0.67	74.0	24.15	Peak	348.00	150	Vertical	Pass
6**	17590.499	39.21	0.67	54.0	14.79	AV	348.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_12.12.12

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n20 CH116 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

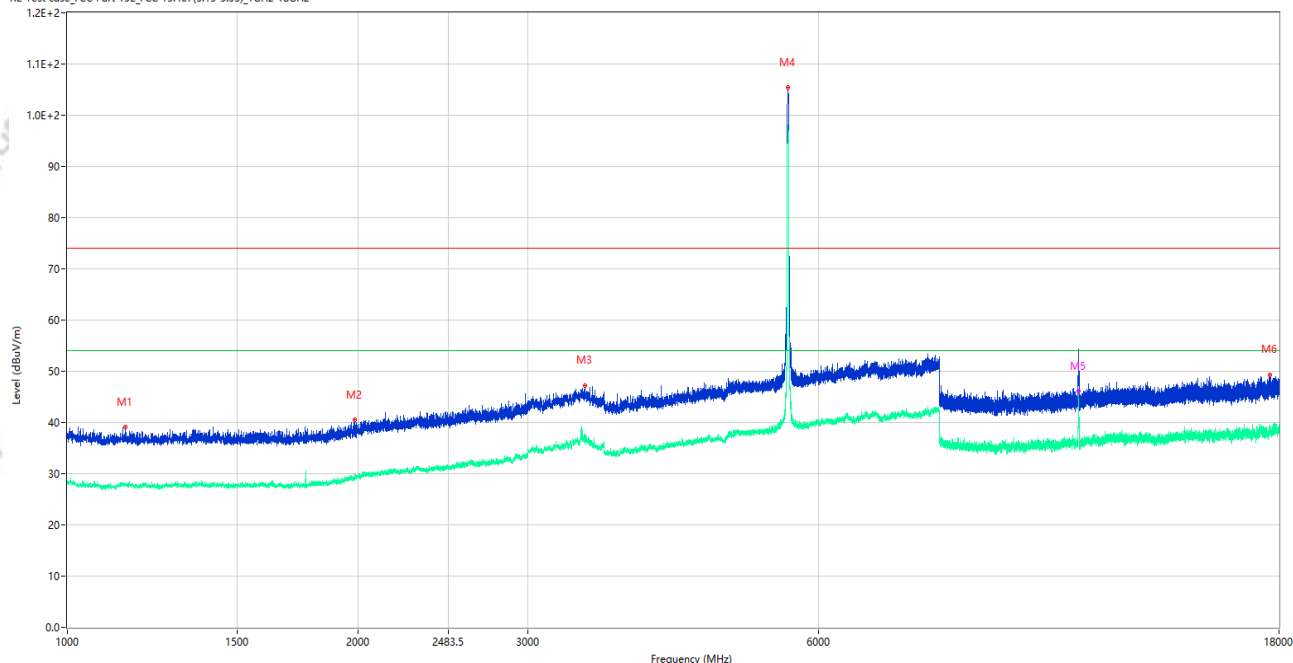

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1149.250	39.04	-15.66	74.0	34.96	Peak	65.00	150	Horizontal	Pass
1**	1149.250	27.85	-15.66	54.0	26.15	AV	65.00	150	Horizontal	Pass
2	1983.250	40.48	-14.88	74.0	33.52	Peak	146.00	150	Horizontal	Pass
2**	1983.250	29.09	-14.88	54.0	24.91	AV	146.00	150	Horizontal	Pass
3	3439.500	47.19	-5.28	74.0	26.81	Peak	358.00	150	Horizontal	Pass
3**	3439.500	36.39	-5.28	54.0	17.61	AV	358.00	150	Horizontal	Pass
4	5579.000	105.38	-2.87	74.0	-31.38	Peak	21.00	150	Horizontal	N/A
4**	5579.000	97.80	-2.87	54.0	-43.80	AV	21.00	150	Horizontal	N/A
5	11159.937	52.35	-4.02	74.0	21.65	Peak	239.00	150	Horizontal	Pass
5**	11159.937	46.08	-4.02	54.0	7.92	AV	239.00	150	Horizontal	Pass
6	17621.737	49.32	0.42	74.0	24.68	Peak	360.00	150	Horizontal	Pass
6**	17621.737	38.61	0.42	54.0	15.39	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_12.19.56

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

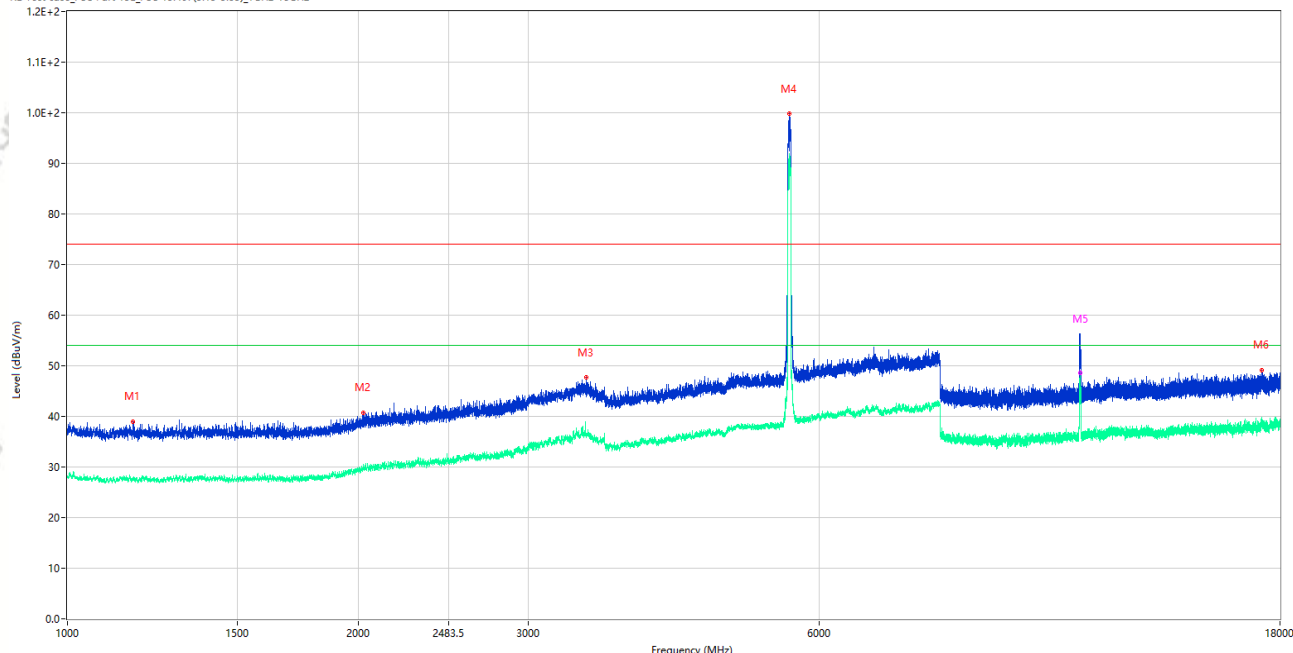

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1170.000	38.87	-15.52	74.0	35.13	Peak	220.00	150	Vertical	Pass
1**	1170.000	27.69	-15.52	54.0	26.31	AV	220.00	150	Vertical	Pass
2	2024.250	40.77	-14.00	74.0	33.23	Peak	80.00	150	Vertical	Pass
2**	2024.250	30.03	-14.00	54.0	23.97	AV	80.00	150	Vertical	Pass
3	3447.500	47.74	-5.14	74.0	26.26	Peak	102.00	150	Vertical	Pass
3**	3447.500	36.40	-5.14	54.0	17.60	AV	102.00	150	Vertical	Pass
4	5588.000	99.76	-2.82	74.0	-25.76	Peak	71.00	150	Vertical	N/A
4**	5588.000	91.81	-2.82	54.0	-37.81	AV	71.00	150	Vertical	N/A
5	11179.412	53.56	-4.17	74.0	20.44	Peak	239.00	150	Vertical	Pass
5**	11179.412	48.66	-4.17	54.0	5.34	AV	239.00	150	Vertical	Pass
6	17248.725	49.19	-0.65	74.0	24.81	Peak	114.00	150	Vertical	Pass
6**	17248.725	39.52	-0.65	54.0	14.48	AV	114.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_12.24.20

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

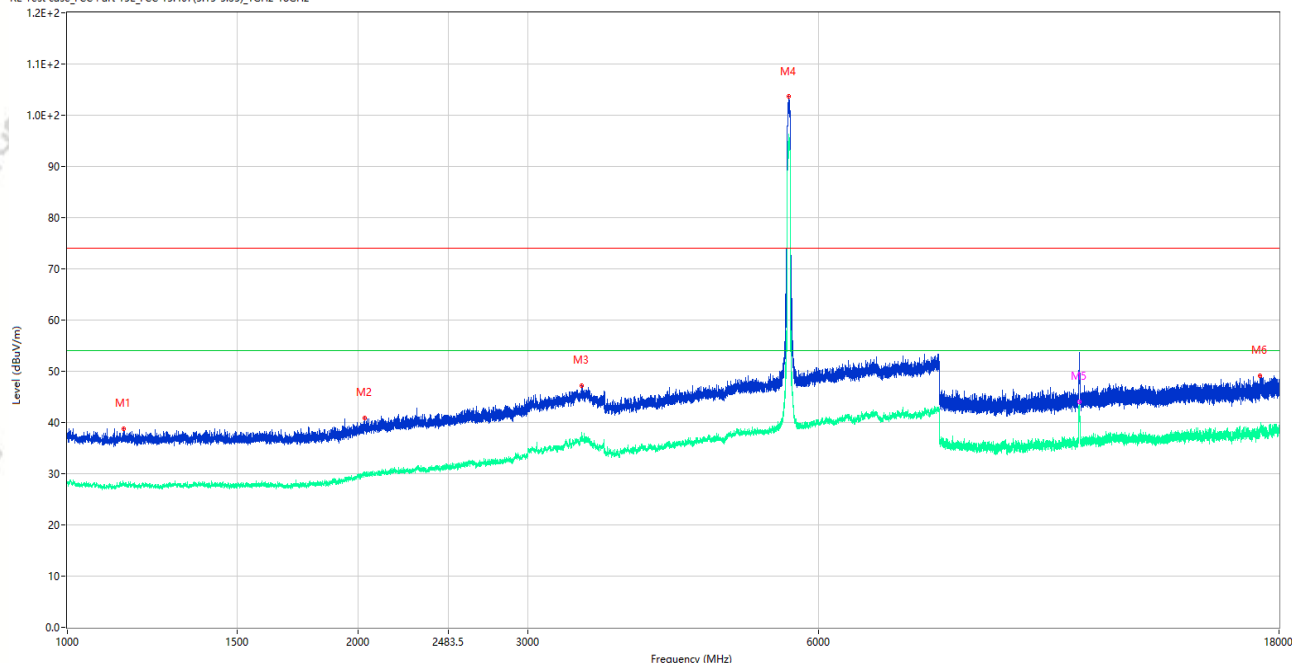

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1143.250	38.78	-15.60	74.0	35.22	Peak	260.00	150	Horizontal	Pass
1**	1143.250	27.72	-15.60	54.0	26.28	AV	260.00	150	Horizontal	Pass
2	2032.000	40.93	-13.50	74.0	33.07	Peak	90.00	150	Horizontal	Pass
2**	2032.000	30.04	-13.50	54.0	23.96	AV	90.00	150	Horizontal	Pass
3	3413.500	47.18	-5.27	74.0	26.82	Peak	111.00	150	Horizontal	Pass
3**	3413.500	36.76	-5.27	54.0	17.24	AV	111.00	150	Horizontal	Pass
4	5592.500	103.61	-2.81	74.0	-29.61	Peak	346.00	150	Horizontal	N/A
4**	5592.500	96.15	-2.81	54.0	-42.15	AV	346.00	150	Horizontal	N/A
5	11184.874	50.15	-4.12	74.0	23.85	Peak	216.00	150	Horizontal	Pass
5**	11184.874	44.11	-4.12	54.0	9.89	AV	216.00	150	Horizontal	Pass
6	17207.775	49.20	-0.09	74.0	24.80	Peak	348.00	150	Horizontal	Pass
6**	17207.775	38.39	-0.09	54.0	15.61	AV	348.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_02.38.07

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

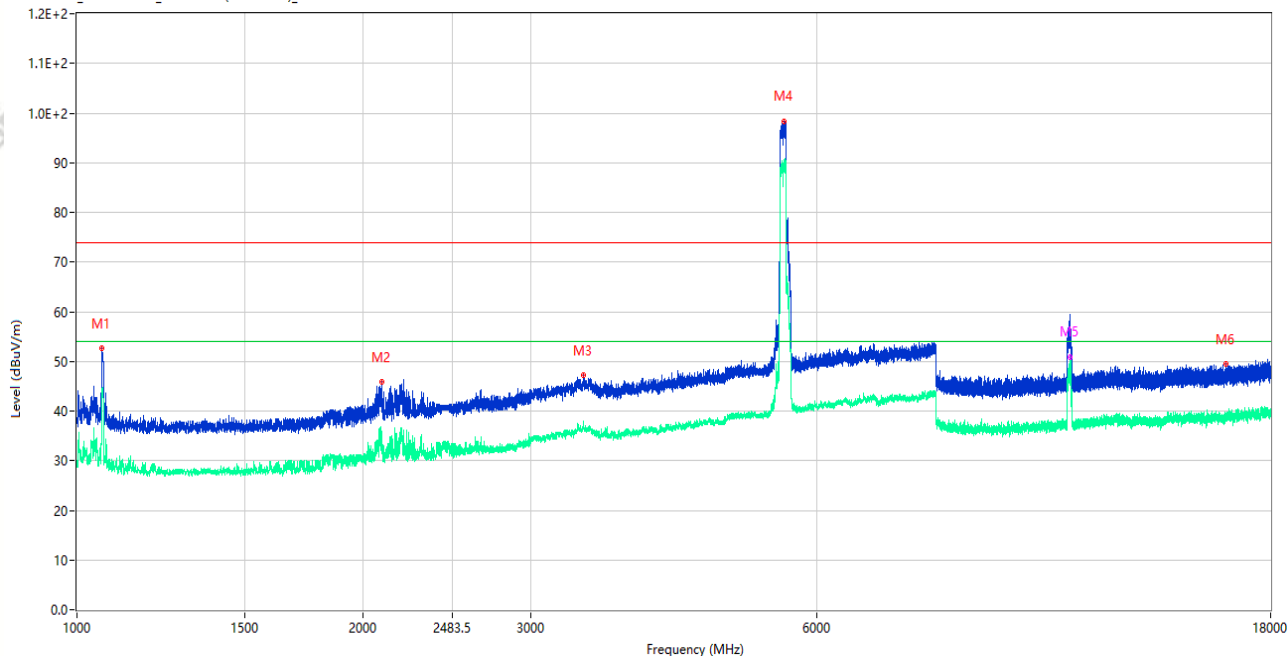

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1063.000	52.73	-15.24	74.0	21.27	Peak	154.00	150	Vertical	Pass
1**	1063.000	44.35	-15.24	54.0	9.65	AV	154.00	150	Vertical	Pass
2	2090.500	45.80	-13.68	74.0	28.20	Peak	130.00	150	Vertical	Pass
2**	2090.500	33.52	-13.68	54.0	20.48	AV	130.00	150	Vertical	Pass
3	3411.000	47.31	-5.30	74.0	26.69	Peak	360.00	150	Vertical	Pass
3**	3411.000	36.80	-5.30	54.0	17.20	AV	360.00	150	Vertical	Pass
4	5540.000	98.42	-2.67	74.0	-24.42	Peak	130.00	150	Vertical	N/A
4**	5540.000	90.29	-2.67	54.0	-36.29	AV	130.00	150	Vertical	N/A
5	11078.950	55.62	-3.91	74.0	18.38	Peak	6.00	150	Vertical	Pass
5**	11078.950	49.35	-3.91	54.0	4.65	AV	6.00	150	Vertical	Pass
6	16166.175	49.48	-1.12	74.0	24.52	Peak	313.00	150	Vertical	Pass
6**	16166.175	38.88	-1.12	54.0	15.12	AV	313.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_02.33.18

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

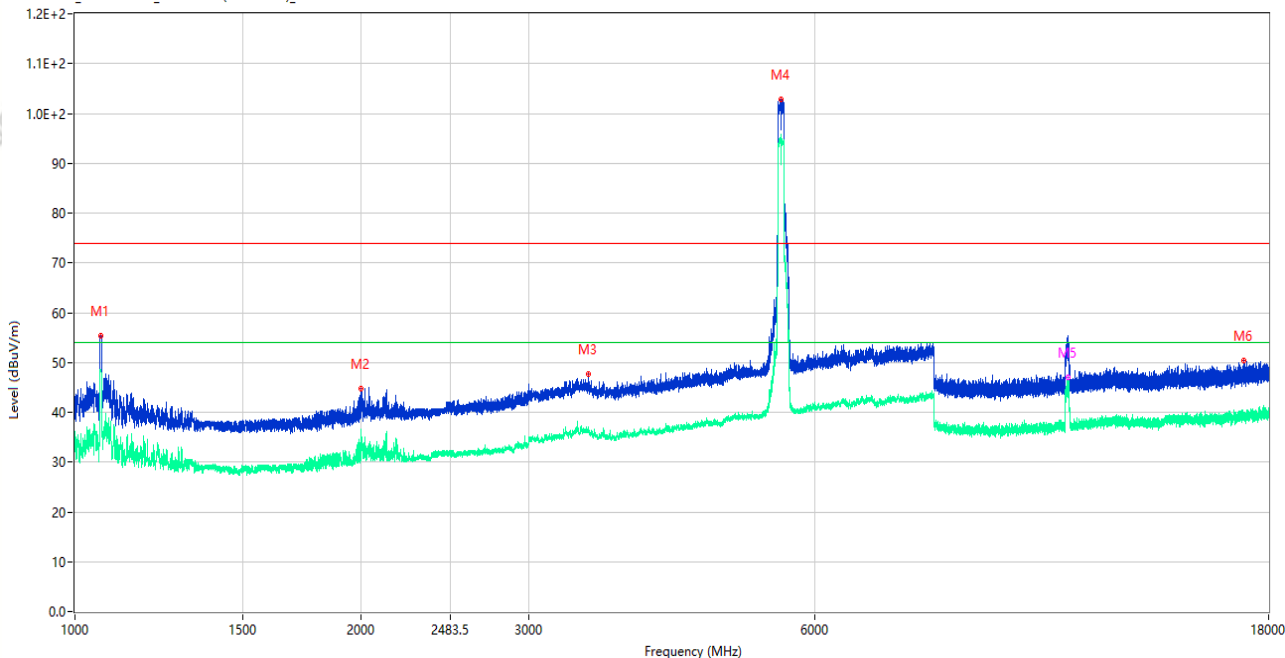

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1065.250	55.37	-15.17	74.0	18.63	Peak	175.00	150	Horizontal	Pass
1**	1065.250	48.36	-15.17	54.0	5.64	AV	175.00	150	Horizontal	Pass
2	1999.250	44.65	-14.33	74.0	29.35	Peak	161.00	150	Horizontal	Pass
2**	1999.250	35.77	-14.33	54.0	18.23	AV	161.00	150	Horizontal	Pass
3	3465.000	47.59	-5.10	74.0	26.41	Peak	8.00	150	Horizontal	Pass
3**	3465.000	36.54	-5.10	54.0	17.46	AV	8.00	150	Horizontal	Pass
4	5524.000	102.72	-2.46	74.0	-28.72	Peak	77.00	150	Horizontal	N/A
4**	5524.000	95.03	-2.46	54.0	-41.03	AV	77.00	150	Horizontal	N/A
5	11081.326	52.67	-4.02	74.0	21.33	Peak	28.00	150	Horizontal	Pass
5**	11081.326	46.92	-4.02	54.0	7.08	AV	28.00	150	Horizontal	Pass
6	16936.875	50.44	-1.11	74.0	23.56	Peak	174.00	150	Horizontal	Pass
6**	16936.875	39.45	-1.11	54.0	14.55	AV	174.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_13.13.54

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax20 CH116 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

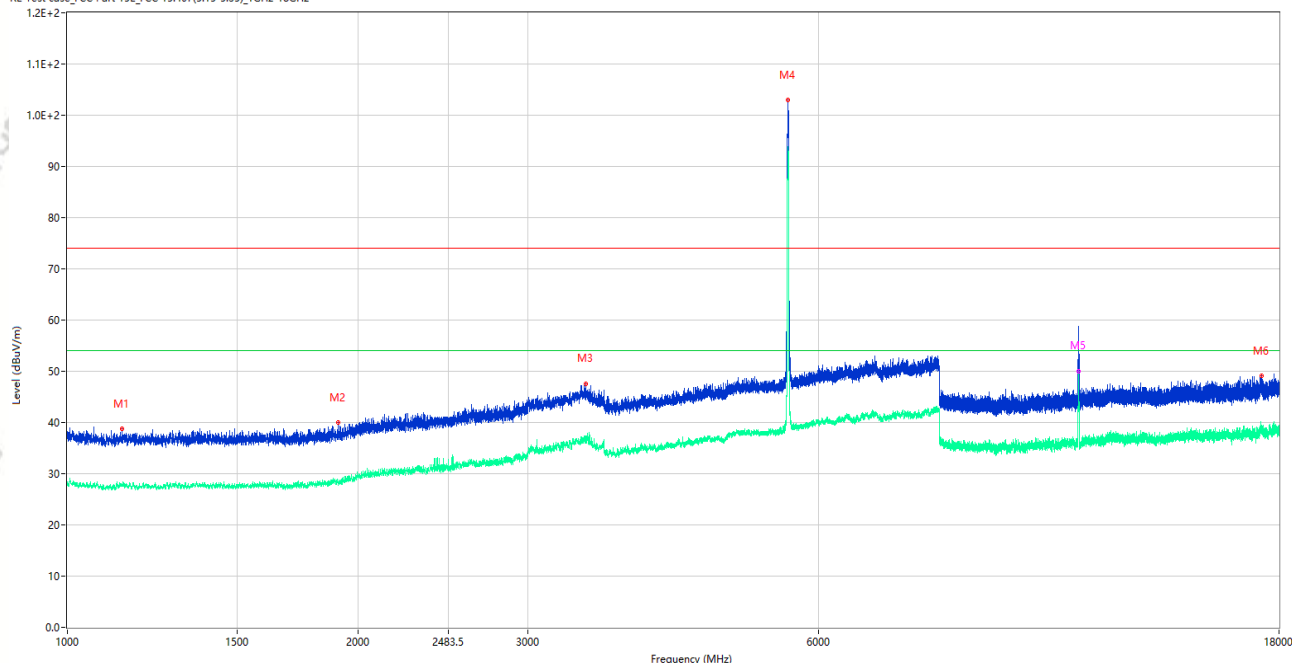

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1140.250	38.70	-15.58	74.0	35.30	Peak	169.00	150	Vertical	Pass
1**	1140.250	27.61	-15.58	54.0	26.39	AV	169.00	150	Vertical	Pass
2	1909.250	39.98	-15.44	74.0	34.02	Peak	360.00	150	Vertical	Pass
2**	1909.250	28.15	-15.44	54.0	25.85	AV	360.00	150	Vertical	Pass
3	3446.500	47.51	-5.15	74.0	26.49	Peak	301.00	150	Vertical	Pass
3**	3446.500	37.16	-5.15	54.0	16.84	AV	301.00	150	Vertical	Pass
4	5580.500	102.93	-2.85	74.0	-28.93	Peak	81.00	150	Vertical	N/A
4**	5580.500	93.12	-2.85	54.0	-39.12	AV	81.00	150	Vertical	N/A
5	11157.562	53.30	-4.03	74.0	20.70	Peak	312.00	150	Vertical	Pass
5**	11157.562	50.05	-4.03	54.0	3.95	AV	312.00	150	Vertical	Pass
6	17265.263	49.16	-1.40	74.0	24.84	Peak	249.00	150	Vertical	Pass
6**	17265.263	38.29	-1.40	54.0	15.71	AV	249.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_13.08.38

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax20 CH116 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

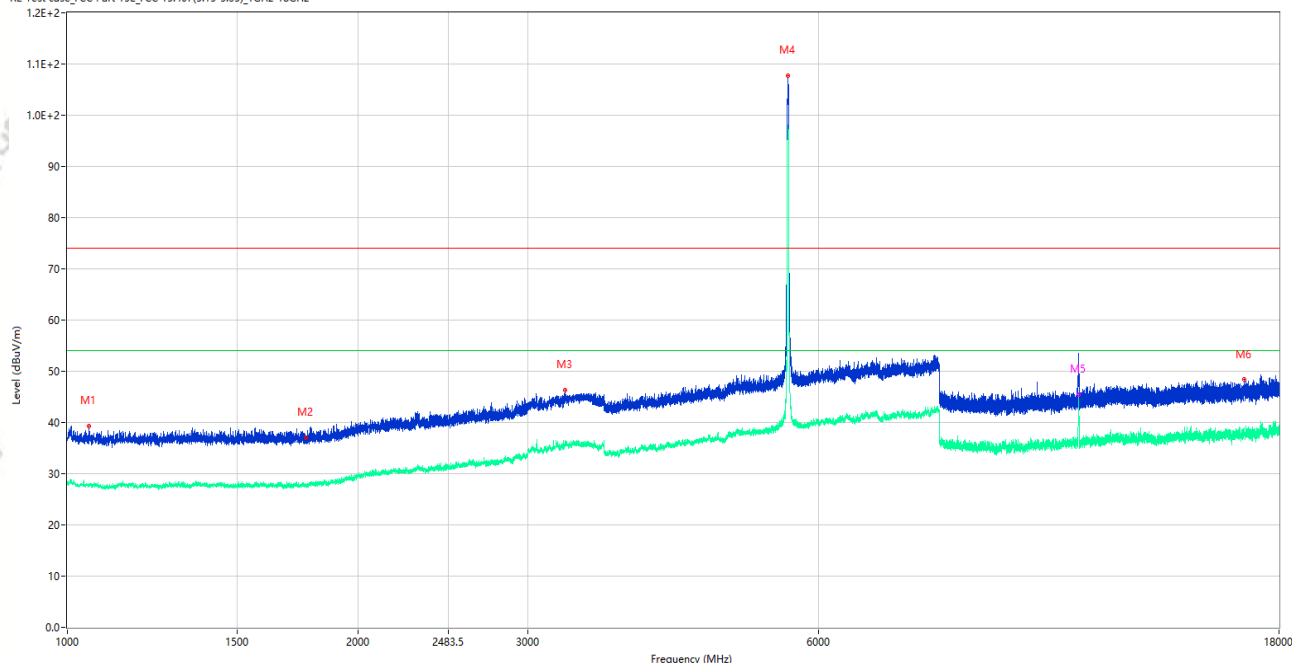

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1053.500	39.38	-15.44	74.0	34.62	Peak	181.00	150	Horizontal	Pass
1**	1053.500	27.48	-15.44	54.0	26.52	AV	181.00	150	Horizontal	Pass
2	1766.250	39.06	-16.14	74.0	34.94	Peak	360.00	150	Horizontal	Pass
2**	1766.250	27.92	-16.14	54.0	26.08	AV	360.00	150	Horizontal	Pass
3	3279.500	46.35	-6.97	74.0	27.65	Peak	359.00	150	Horizontal	Pass
3**	3279.500	35.93	-6.97	54.0	18.07	AV	359.00	150	Horizontal	Pass
4	5580.500	107.78	-2.85	74.0	-33.78	Peak	355.00	150	Horizontal	N/A
4**	5580.500	97.28	-2.85	54.0	-43.28	AV	355.00	150	Horizontal	N/A
5	11158.988	52.20	-4.02	74.0	21.80	Peak	261.00	150	Horizontal	Pass
5**	11158.988	45.50	-4.02	54.0	8.50	AV	261.00	150	Horizontal	Pass
6	16565.437	48.38	-1.08	74.0	25.62	Peak	359.00	150	Horizontal	Pass
6**	16565.437	37.99	-1.08	54.0	16.01	AV	359.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_03.23.51

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax40 CH118 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

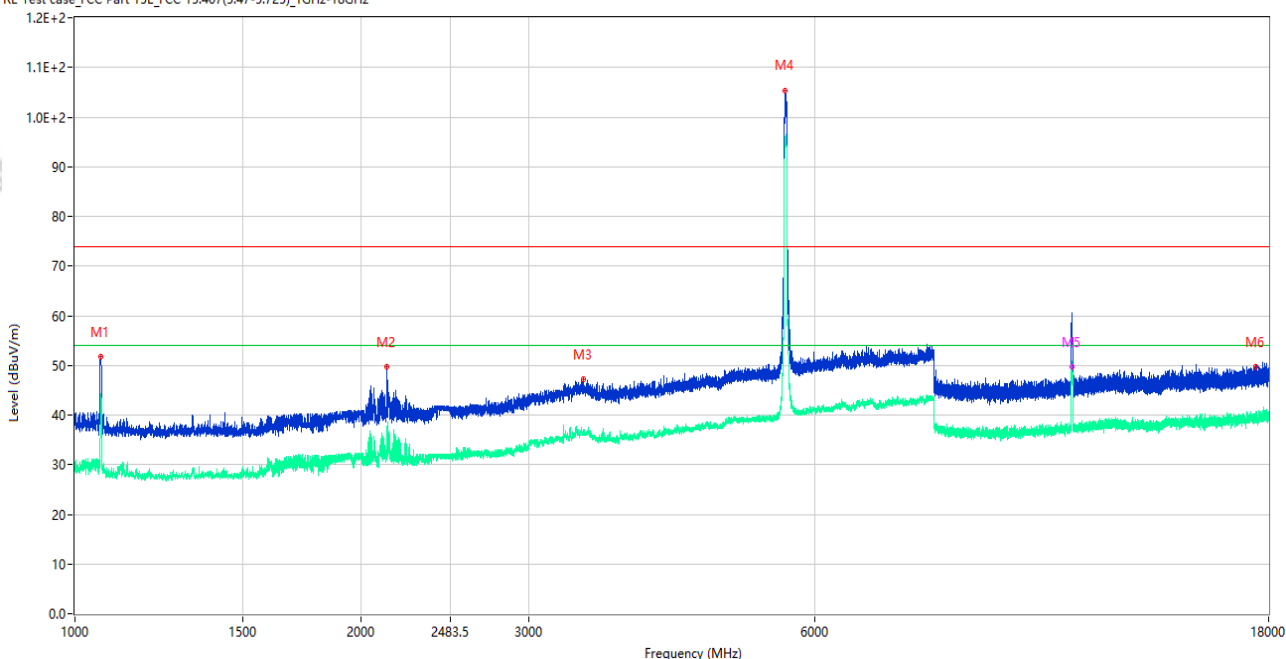

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1064.250	51.80	-15.21	74.0	22.20	Peak	113.00	150	Vertical	Pass
1**	1064.250	44.27	-15.21	54.0	9.73	AV	113.00	150	Vertical	Pass
2	2130.250	49.69	-13.26	74.0	24.31	Peak	105.00	150	Vertical	Pass
2**	2130.250	35.71	-13.26	54.0	18.29	AV	105.00	150	Vertical	Pass
3	3426.000	47.25	-4.91	74.0	26.75	Peak	271.00	150	Vertical	Pass
3**	3426.000	36.52	-4.91	54.0	17.48	AV	271.00	150	Vertical	Pass
4	5587.000	105.28	-2.83	74.0	-31.28	Peak	126.00	150	Vertical	N/A
4**	5587.000	96.01	-2.83	54.0	-42.01	AV	126.00	150	Vertical	N/A
5	11171.100	54.36	-4.15	74.0	19.64	Peak	0.00	150	Vertical	Pass
5**	11171.100	49.63	-4.15	54.0	4.37	AV	0.00	150	Vertical	Pass
6	17452.687	49.83	0.19	74.0	24.17	Peak	280.00	150	Vertical	Pass
6**	17452.687	39.67	0.19	54.0	14.33	AV	280.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_03.28.08

EUT Name: Mobile Computer

Temp.(°C): 23.2

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax40 CH118 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A11+数据线: A45 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

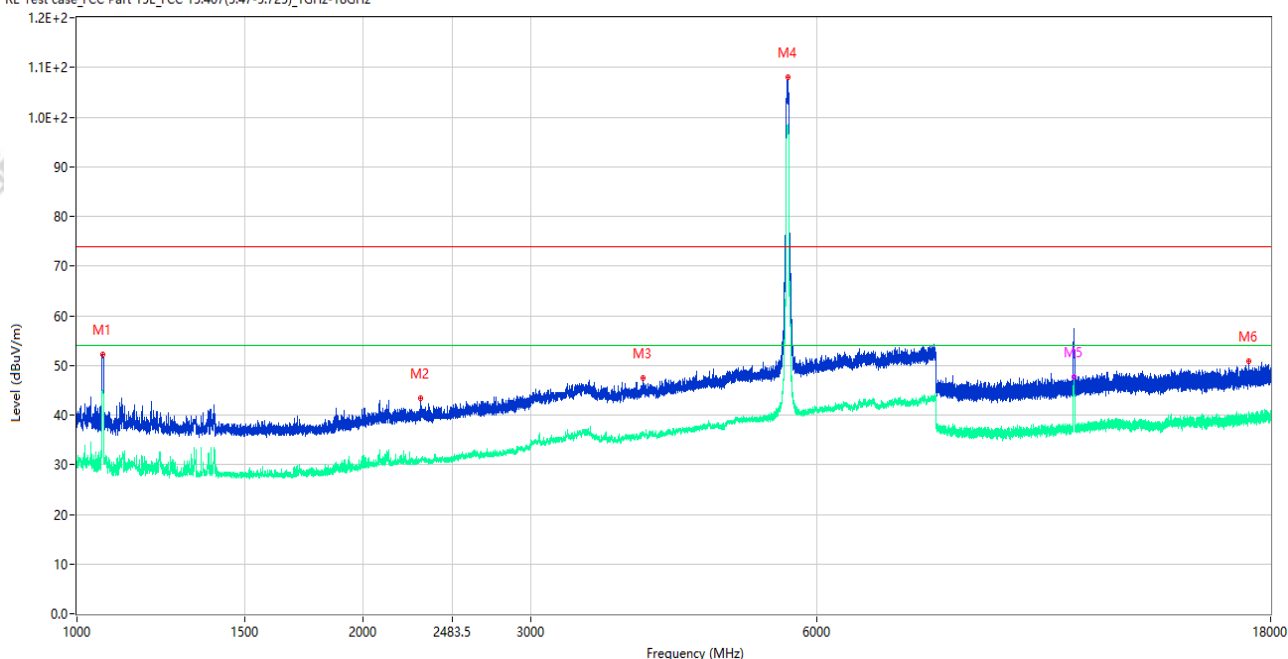

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1065.500	52.20	-15.16	74.0	21.80	Peak	123.00	150	Horizontal	Pass
1**	1065.500	44.56	-15.16	54.0	9.44	AV	123.00	150	Horizontal	Pass
2	2300.000	43.32	-13.07	74.0	30.68	Peak	185.00	150	Horizontal	Pass
2**	2300.000	31.28	-13.07	54.0	22.72	AV	185.00	150	Horizontal	Pass
3	3942.500	47.40	-4.22	74.0	26.60	Peak	331.00	150	Horizontal	Pass
3**	3942.500	36.26	-4.22	54.0	17.74	AV	331.00	150	Horizontal	Pass
4	5592.500	108.03	-2.81	74.0	-34.03	Peak	78.00	150	Horizontal	N/A
4**	5592.500	98.42	-2.81	54.0	-44.42	AV	78.00	150	Horizontal	N/A
5	11173.713	54.63	-4.10	74.0	19.37	Peak	51.00	150	Horizontal	Pass
5**	11173.713	47.72	-4.10	54.0	6.28	AV	51.00	150	Horizontal	Pass
6	17092.012	50.80	-0.66	74.0	23.20	Peak	245.00	150	Horizontal	Pass
6**	17092.012	39.93	-0.66	54.0	14.07	AV	245.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_13.25.18

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax80 CH106 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case FCC Part 15E FCC 15.407(5.47-5.725)_1GHz-18GHz

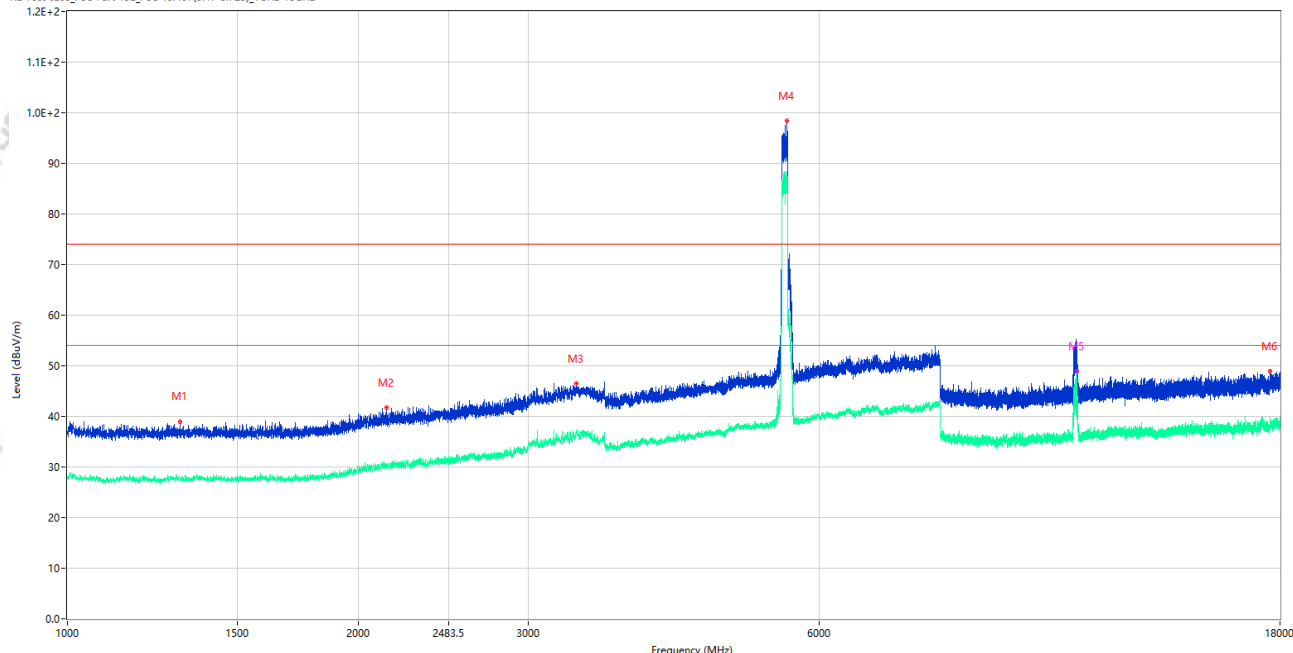

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1307.500	38.97	-15.66	74.0	35.03	Peak	360.00	150	Vertical	Pass
1**	1307.500	27.57	-15.66	54.0	26.43	AV	360.00	150	Vertical	Pass
2	2140.250	41.84	-13.78	74.0	32.16	Peak	46.00	150	Vertical	Pass
2**	2140.250	30.13	-13.78	54.0	23.87	AV	46.00	150	Vertical	Pass
3	3366.500	46.48	-5.05	74.0	27.52	Peak	345.00	150	Vertical	Pass
3**	3366.500	37.29	-5.05	54.0	16.71	AV	345.00	150	Vertical	Pass
4	5558.000	98.35	-2.79	74.0	-24.35	Peak	78.00	150	Vertical	N/A
4**	5558.000	88.45	-2.79	54.0	-34.45	AV	78.00	150	Vertical	N/A
5	11091.299	52.75	-3.76	74.0	21.25	Peak	240.00	150	Vertical	Pass
5**	11091.299	48.93	-3.76	54.0	5.07	AV	240.00	150	Vertical	Pass
6	17593.125	48.92	0.65	74.0	25.08	Peak	360.00	150	Vertical	Pass
6**	17593.125	38.72	0.65	54.0	15.28	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-26_13.30.00

EUT Name: Mobile Computer

Temp.(°C): 22.6

Model Number: RS20

Humidity (%RH): 51

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax80 CH106 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725).1GHz-18GHz

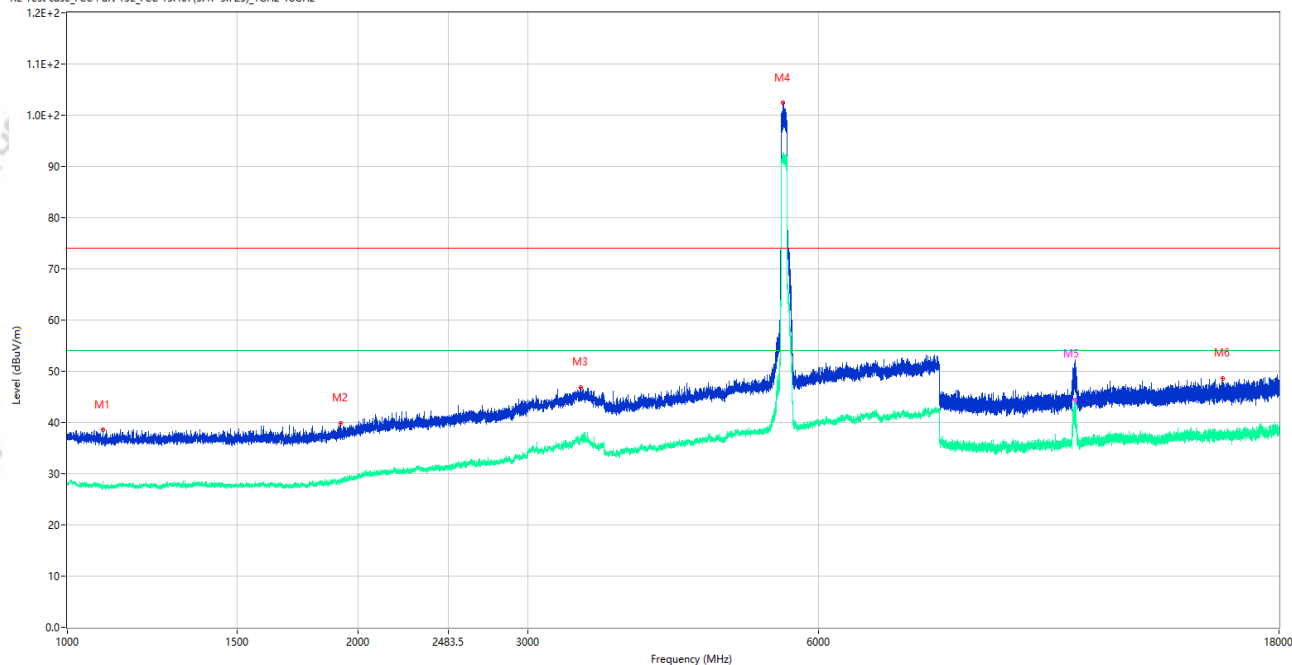

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1088.500	38.59	-15.79	74.0	35.41	Peak	56.00	150	Horizontal	Pass
1**	1088.500	27.85	-15.79	54.0	26.15	AV	56.00	150	Horizontal	Pass
2	1917.500	39.79	-15.50	74.0	34.21	Peak	182.00	150	Horizontal	Pass
2**	1917.500	28.63	-15.50	54.0	25.37	AV	182.00	150	Horizontal	Pass
3	3401.500	46.82	-5.60	74.0	27.18	Peak	357.00	150	Horizontal	Pass
3**	3401.500	36.96	-5.60	54.0	17.04	AV	357.00	150	Horizontal	Pass
4	5513.500	102.45	-2.58	74.0	-28.45	Peak	11.00	150	Horizontal	N/A
4**	5513.500	92.12	-2.58	54.0	-38.12	AV	11.00	150	Horizontal	N/A
5	11079.187	49.99	-3.90	74.0	24.01	Peak	239.00	150	Horizontal	Pass
5**	11079.187	44.45	-3.90	54.0	9.55	AV	239.00	150	Horizontal	Pass
6	15752.738	48.66	-1.98	74.0	25.34	Peak	150.00	150	Horizontal	Pass
6**	15752.738	37.32	-1.98	54.0	16.68	AV	150.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_11.44.51

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

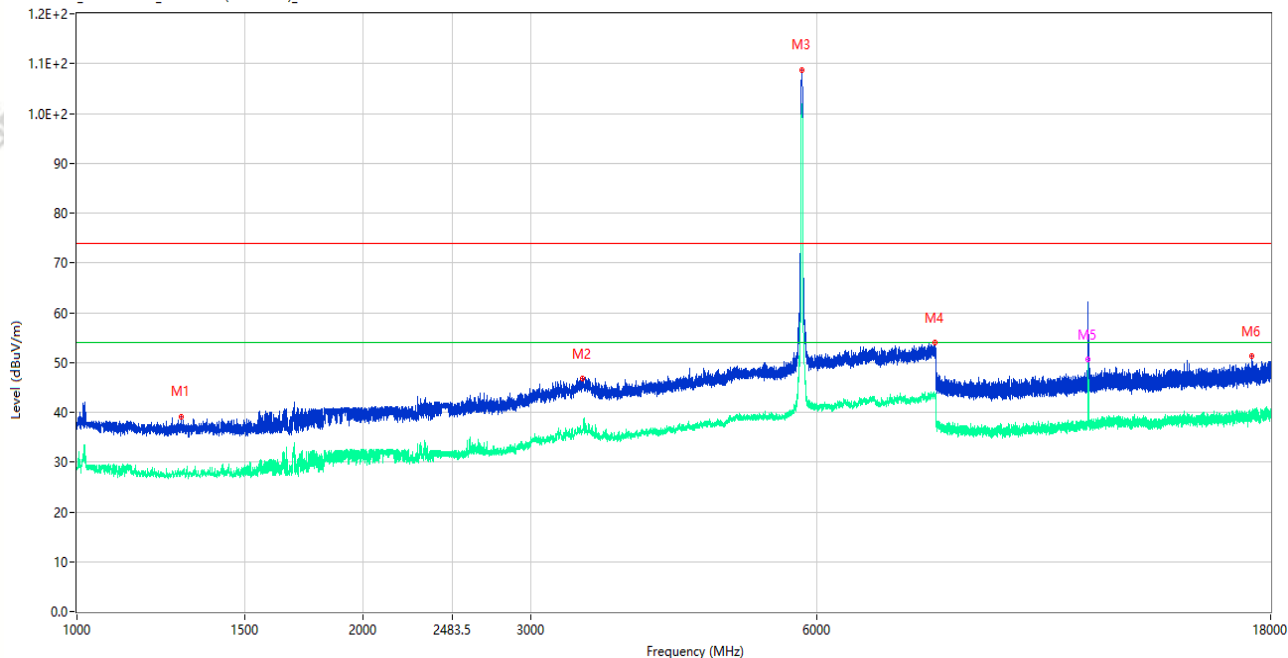

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1287.000	39.01	-15.92	74.0	34.99	Peak	17.00	150	Vertical	Pass
1**	1287.000	27.82	-15.92	54.0	26.18	AV	17.00	150	Vertical	Pass
2	3404.000	46.82	-5.50	74.0	27.18	Peak	296.00	150	Vertical	Pass
2**	3404.000	36.32	-5.50	54.0	17.68	AV	296.00	150	Vertical	Pass
3	5784.000	108.79	-1.54	74.0	-34.79	Peak	130.00	150	Vertical	N/A
3**	5784.000	101.27	-1.54	54.0	-47.27	AV	130.00	150	Vertical	N/A
4	7984.500	54.01	1.92	74.0	19.99	Peak	215.00	150	Vertical	Pass
4**	7984.500	43.22	1.92	54.0	10.78	AV	215.00	150	Vertical	Pass
5	11570.338	56.38	-2.33	74.0	17.62	Peak	309.00	150	Vertical	Pass
5**	11570.338	50.58	-2.33	54.0	3.42	AV	309.00	150	Vertical	Pass
6	17186.511	51.37	0.14	74.0	22.63	Peak	82.00	150	Vertical	Pass
6**	17186.511	39.41	0.14	54.0	14.59	AV	82.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_11.40.32

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

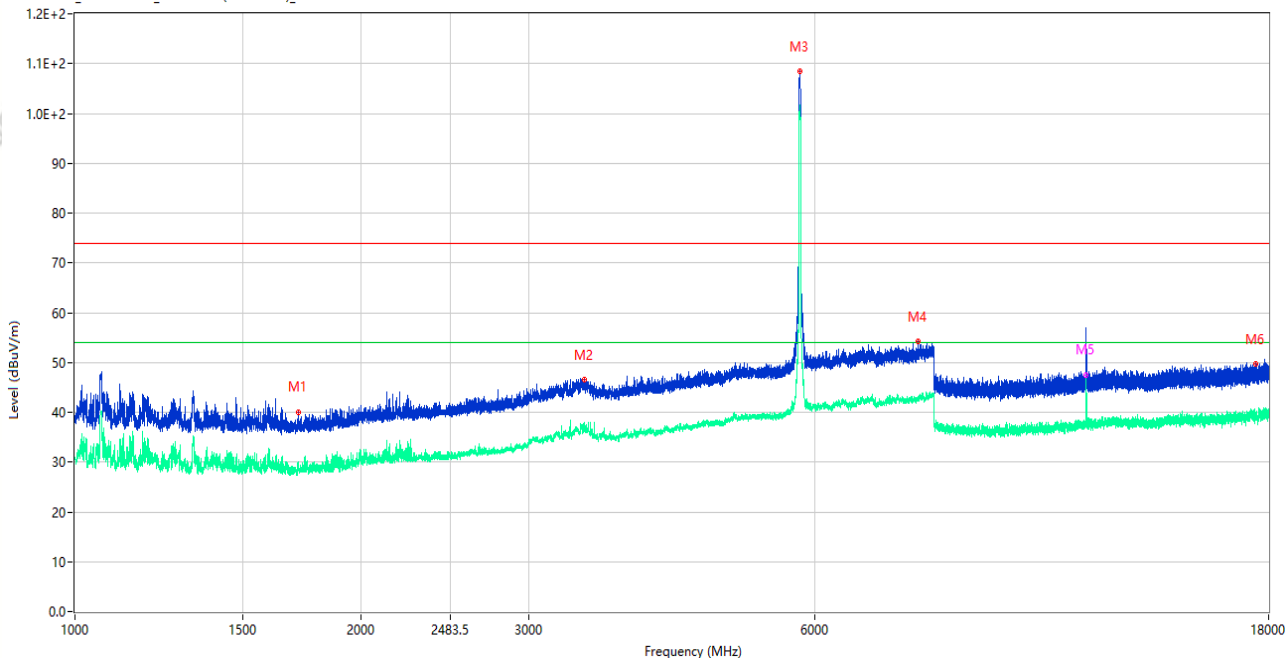

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1716.000	39.95	-16.24	74.0	34.05	Peak	53.00	150	Horizontal	Pass
1**	1716.000	29.92	-16.24	54.0	24.08	AV	53.00	150	Horizontal	Pass
2	3431.000	46.45	-5.03	74.0	27.55	Peak	80.00	150	Horizontal	Pass
2**	3431.000	37.66	-5.03	54.0	16.34	AV	80.00	150	Horizontal	Pass
3	5783.500	108.42	-1.54	74.0	-34.42	Peak	89.00	150	Horizontal	N/A
3**	5783.500	101.19	-1.54	54.0	-47.19	AV	89.00	150	Horizontal	N/A
4	7702.500	54.32	1.47	74.0	19.68	Peak	0.00	150	Horizontal	Pass
4**	7702.500	42.30	1.47	54.0	11.70	AV	0.00	150	Horizontal	Pass
5	11569.388	54.97	-2.30	74.0	19.03	Peak	360.00	150	Horizontal	Pass
5**	11569.388	47.57	-2.30	54.0	6.43	AV	360.00	150	Horizontal	Pass
6	17458.463	49.78	0.03	74.0	24.22	Peak	0.00	150	Horizontal	Pass
6**	17458.463	38.79	0.03	54.0	15.21	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_13.52.30

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

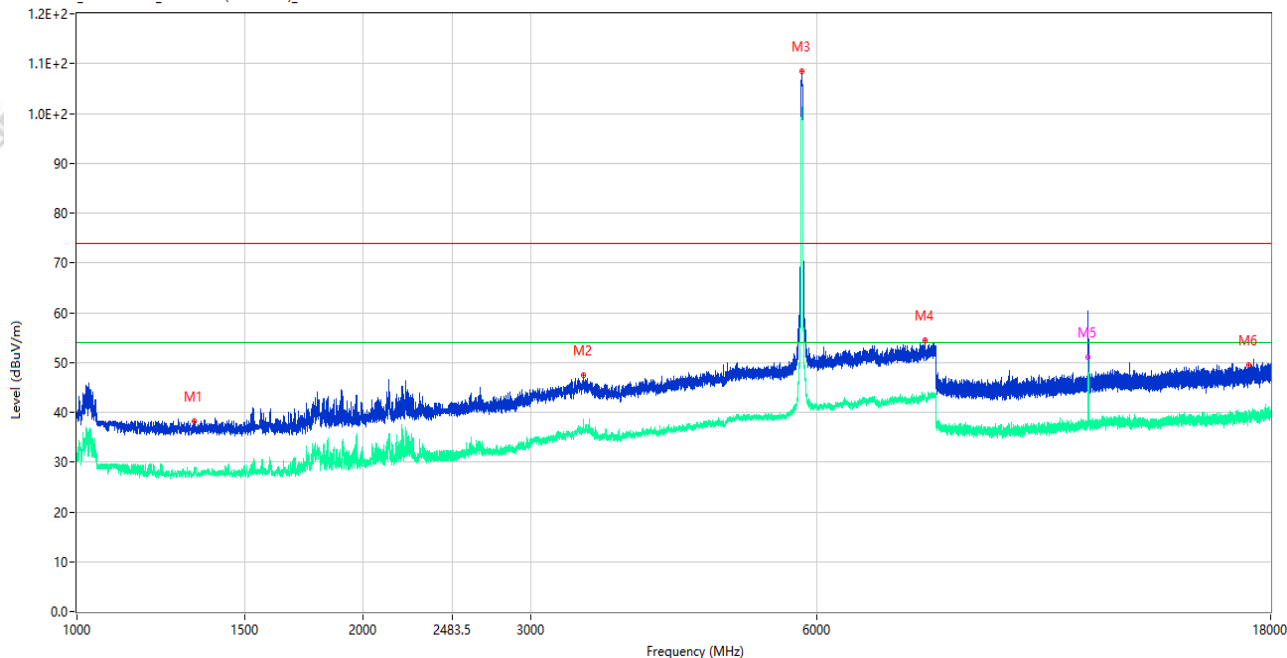

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.500	38.10	-15.94	74.0	35.90	Peak	260.00	150	Vertical	Pass
1**	1328.500	28.56	-15.94	54.0	25.44	AV	260.00	150	Vertical	Pass
2	3409.000	47.41	-5.35	74.0	26.59	Peak	81.00	150	Vertical	Pass
2**	3409.000	38.08	-5.35	54.0	15.92	AV	81.00	150	Vertical	Pass
3	5784.000	108.45	-1.54	74.0	-34.45	Peak	170.00	150	Vertical	N/A
3**	5784.000	100.70	-1.54	54.0	-46.70	AV	170.00	150	Vertical	N/A
4	7787.500	54.40	1.59	74.0	19.60	Peak	161.00	150	Vertical	Pass
4**	7787.500	43.37	1.59	54.0	10.63	AV	161.00	150	Vertical	Pass
5	11569.863	57.97	-2.29	74.0	16.03	Peak	332.00	150	Vertical	Pass
5**	11569.863	50.05	-2.29	54.0	3.95	AV	332.00	150	Vertical	Pass
6	17065.762	49.46	-0.93	74.0	24.54	Peak	0.00	150	Vertical	Pass
6**	17065.762	39.08	-0.93	54.0	14.92	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_13.48.36

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

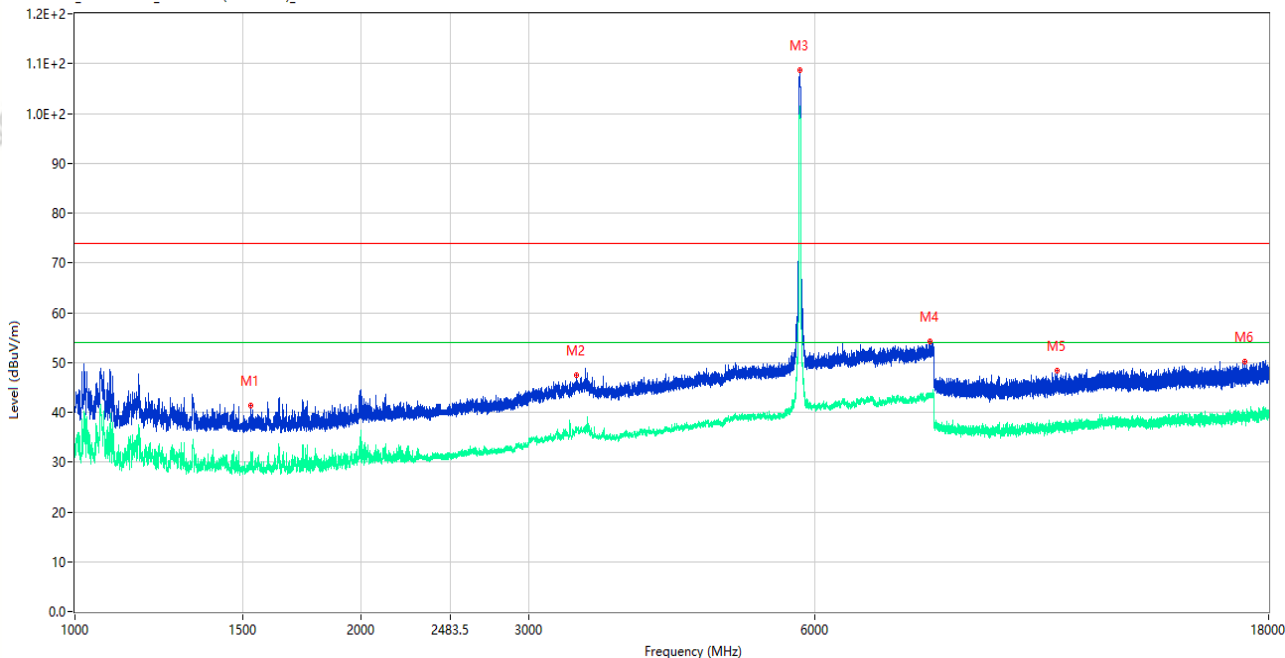

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1531.500	41.46	-16.04	74.0	32.54	Peak	160.00	150	Horizontal	Pass
1**	1531.500	31.98	-16.04	54.0	22.02	AV	160.00	150	Horizontal	Pass
2	3371.000	47.42	-4.85	74.0	26.58	Peak	176.00	150	Horizontal	Pass
2**	3371.000	36.10	-4.85	54.0	17.90	AV	176.00	150	Horizontal	Pass
3	5783.500	108.60	-1.54	74.0	-34.60	Peak	77.00	150	Horizontal	N/A
3**	5783.500	101.15	-1.54	54.0	-47.15	AV	77.00	150	Horizontal	N/A
4	7920.000	54.23	1.96	74.0	19.77	Peak	0.00	150	Horizontal	Pass
4**	7920.000	43.40	1.96	54.0	10.60	AV	0.00	150	Horizontal	Pass
5	10781.838	48.39	-3.02	74.0	25.61	Peak	100.00	150	Horizontal	Pass
5**	10781.838	37.14	-3.02	54.0	16.86	AV	100.00	150	Horizontal	Pass
6	16980.449	50.09	-1.14	74.0	23.91	Peak	47.00	150	Horizontal	Pass
6**	16980.449	39.04	-1.14	54.0	14.96	AV	47.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_19.04.58

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

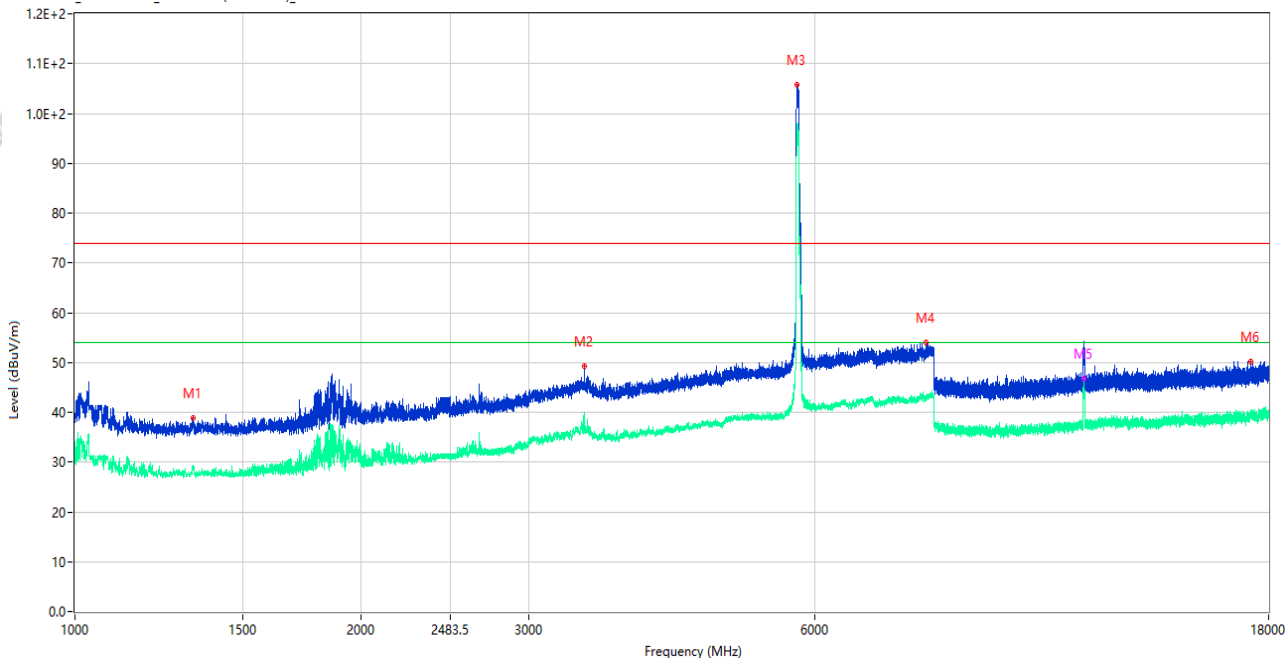

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.000	38.84	-15.97	74.0	35.16	Peak	129.00	150	Vertical	Pass
1**	1330.000	29.36	-15.97	54.0	24.64	AV	129.00	150	Vertical	Pass
2	3432.000	49.22	-5.06	74.0	24.78	Peak	133.00	150	Vertical	Pass
2**	3432.000	39.91	-5.06	54.0	14.09	AV	133.00	150	Vertical	Pass
3	5749.500	105.73	-2.12	74.0	-31.73	Peak	124.00	150	Vertical	N/A
3**	5749.500	97.51	-2.12	54.0	-43.51	AV	124.00	150	Vertical	N/A
4	7860.000	54.00	1.64	74.0	20.00	Peak	360.00	150	Vertical	Pass
4**	7860.000	43.04	1.64	54.0	10.96	AV	360.00	150	Vertical	Pass
5	11498.849	54.03	-2.95	74.0	19.97	Peak	332.00	150	Vertical	Pass
5**	11498.849	46.74	-2.95	54.0	7.26	AV	332.00	150	Vertical	Pass
6	17247.150	50.24	-0.72	74.0	23.76	Peak	346.00	150	Vertical	Pass
6**	17247.150	39.38	-0.72	54.0	14.62	AV	346.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_19.08.52

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

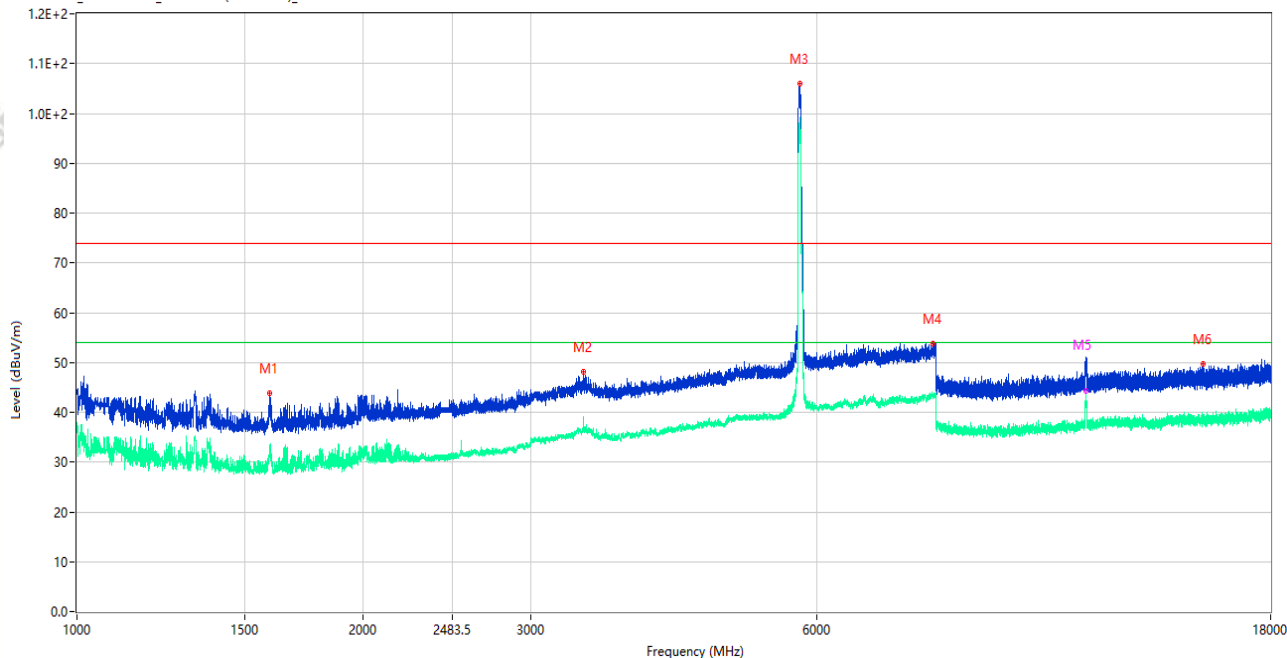

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1595.500	43.83	-16.25	74.0	30.17	Peak	179.00	150	Horizontal	Pass
1**	1595.500	32.83	-16.25	54.0	21.17	AV	179.00	150	Horizontal	Pass
2	3410.000	48.19	-5.33	74.0	25.81	Peak	356.00	150	Horizontal	Pass
2**	3410.000	37.94	-5.33	54.0	16.06	AV	356.00	150	Horizontal	Pass
3	5758.500	105.99	-1.97	74.0	-31.99	Peak	83.00	150	Horizontal	N/A
3**	5758.500	98.58	-1.97	54.0	-44.58	AV	83.00	150	Horizontal	N/A
4	7945.500	53.72	1.93	74.0	20.28	Peak	360.00	150	Horizontal	Pass
4**	7945.500	43.48	1.93	54.0	10.52	AV	360.00	150	Horizontal	Pass
5	11508.825	50.23	-3.07	74.0	23.77	Peak	6.00	150	Horizontal	Pass
5**	11508.825	44.35	-3.07	54.0	9.65	AV	6.00	150	Horizontal	Pass
6	15270.525	49.79	-1.28	74.0	24.21	Peak	360.00	150	Horizontal	Pass
6**	15270.525	38.48	-1.28	54.0	15.52	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.00.42

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

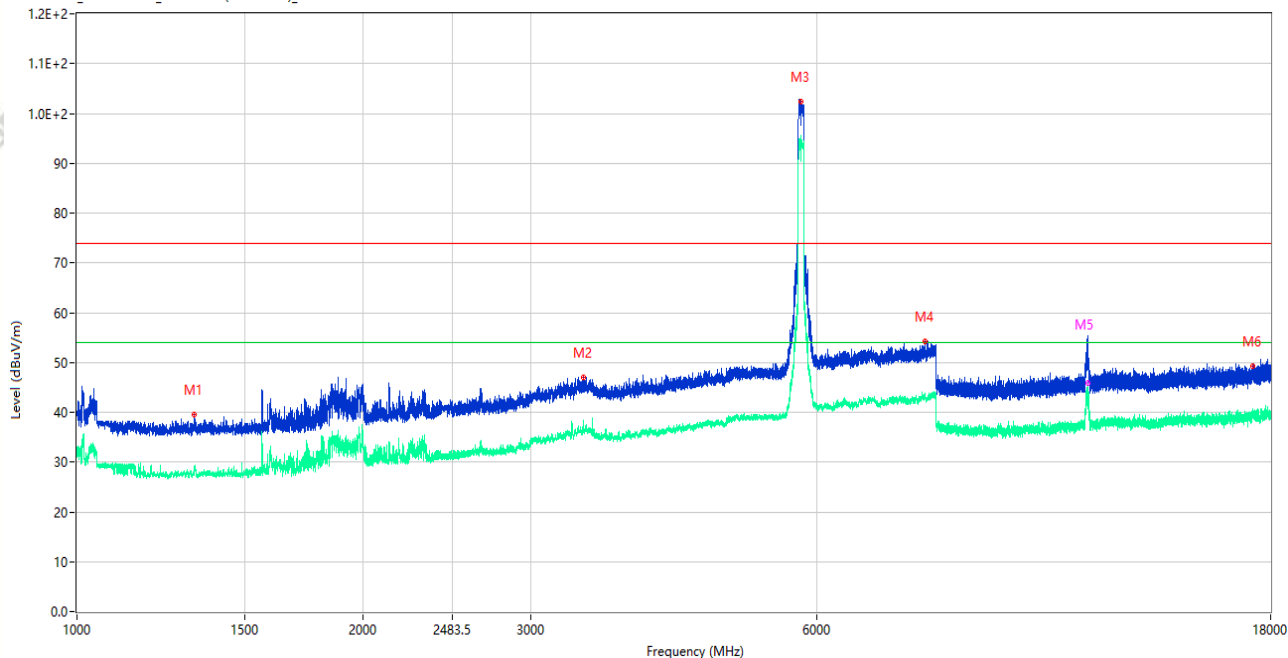

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.750	39.54	-15.94	74.0	34.46	Peak	120.00	150	Vertical	Pass
1**	1328.750	28.93	-15.94	54.0	25.07	AV	120.00	150	Vertical	Pass
2	3409.000	47.08	-5.35	74.0	26.92	Peak	261.00	150	Vertical	Pass
2**	3409.000	38.42	-5.35	54.0	15.58	AV	261.00	150	Vertical	Pass
3	5777.000	102.34	-1.53	74.0	-28.34	Peak	142.00	150	Vertical	N/A
3**	5777.000	94.21	-1.53	54.0	-40.21	AV	142.00	150	Vertical	N/A
4	7801.500	54.18	1.54	74.0	19.82	Peak	211.00	150	Vertical	Pass
4**	7801.500	42.72	1.54	54.0	11.28	AV	211.00	150	Vertical	Pass
5	11566.300	53.94	-2.29	74.0	20.06	Peak	28.00	150	Vertical	Pass
5**	11566.300	45.98	-2.29	54.0	8.02	AV	28.00	150	Vertical	Pass
6	17230.088	49.18	-0.38	74.0	24.82	Peak	360.00	150	Vertical	Pass
6**	17230.088	40.50	-0.38	54.0	13.50	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.04.45

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

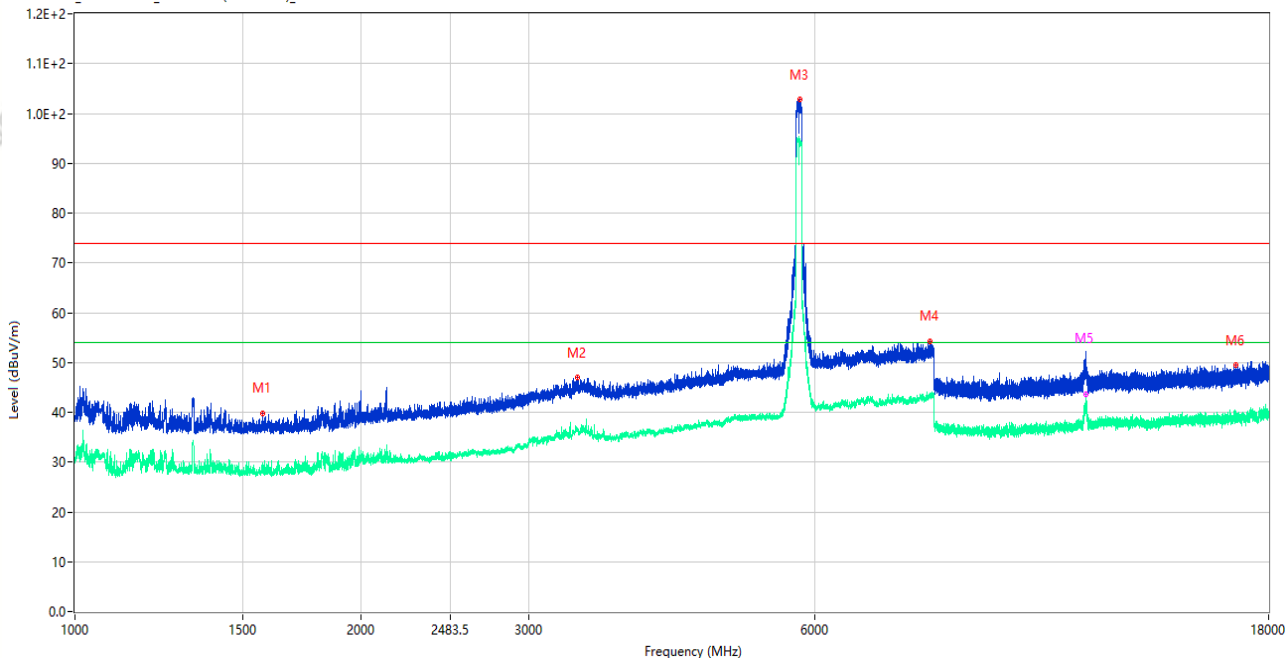

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1577.000	39.83	-16.10	74.0	34.17	Peak	198.00	150	Horizontal	Pass
1**	1577.000	28.74	-16.10	54.0	25.26	AV	198.00	150	Horizontal	Pass
2	3380.000	46.90	-5.11	74.0	27.10	Peak	360.00	150	Horizontal	Pass
2**	3380.000	36.34	-5.11	54.0	17.66	AV	360.00	150	Horizontal	Pass
3	5781.500	102.84	-1.53	74.0	-28.84	Peak	72.00	150	Horizontal	N/A
3**	5781.500	94.62	-1.53	54.0	-40.62	AV	72.00	150	Horizontal	N/A
4	7921.000	54.34	1.94	74.0	19.66	Peak	182.00	150	Horizontal	Pass
4**	7921.000	43.22	1.94	54.0	10.78	AV	182.00	150	Horizontal	Pass
5	11566.300	51.11	-2.29	74.0	22.89	Peak	28.00	150	Horizontal	Pass
5**	11566.300	43.68	-2.29	54.0	10.32	AV	28.00	150	Horizontal	Pass
6	16624.500	49.56	-1.20	74.0	24.44	Peak	360.00	150	Horizontal	Pass
6**	16624.500	39.01	-1.20	54.0	14.99	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.28.37

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

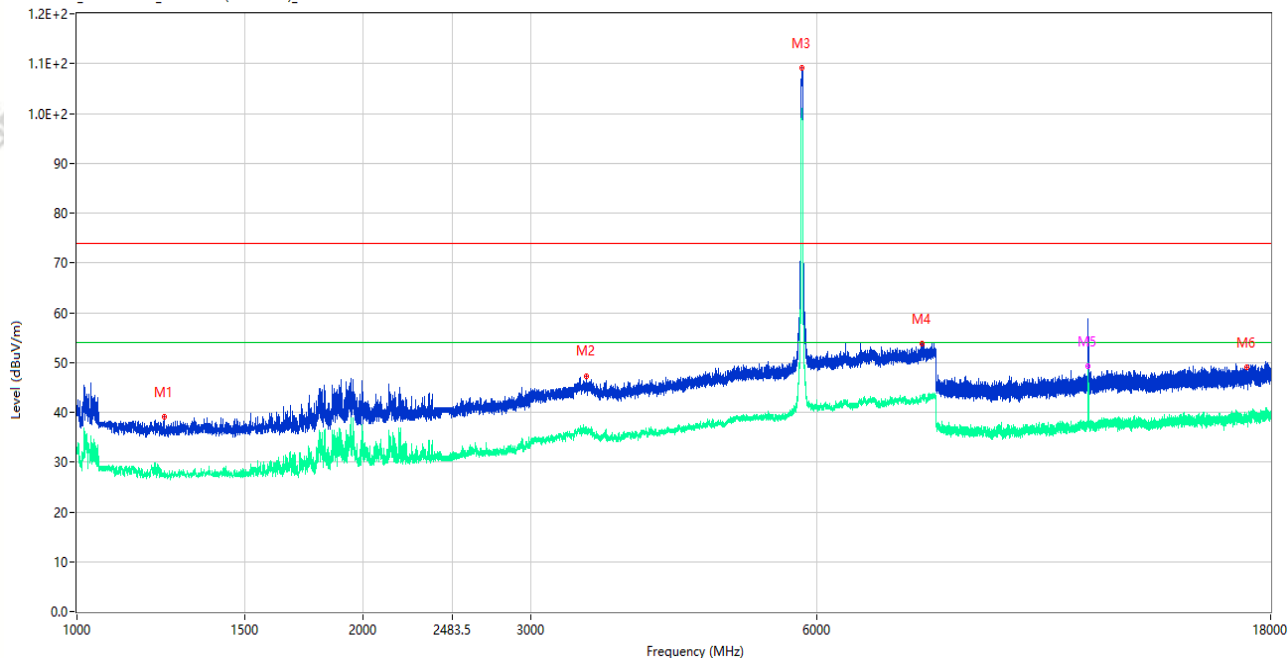

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1236.250	39.15	-16.00	74.0	34.85	Peak	161.00	150	Vertical	Pass
1**	1236.250	27.14	-16.00	54.0	26.86	AV	161.00	150	Vertical	Pass
2	3432.000	47.17	-5.06	74.0	26.83	Peak	360.00	150	Vertical	Pass
2**	3432.000	36.61	-5.06	54.0	17.39	AV	360.00	150	Vertical	Pass
3	5786.000	109.08	-1.53	74.0	-35.08	Peak	143.00	150	Vertical	N/A
3**	5786.000	100.46	-1.53	54.0	-46.46	AV	143.00	150	Vertical	N/A
4	7733.500	53.72	1.11	74.0	20.28	Peak	360.00	150	Vertical	Pass
4**	7733.500	43.22	1.11	54.0	10.78	AV	360.00	150	Vertical	Pass
5	11569.625	55.38	-2.29	74.0	18.62	Peak	26.00	150	Vertical	Pass
5**	11569.625	49.32	-2.29	54.0	4.68	AV	26.00	150	Vertical	Pass
6	16978.350	48.93	-1.18	74.0	25.07	Peak	360.00	150	Vertical	Pass
6**	16978.350	38.54	-1.18	54.0	15.46	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.24.49

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

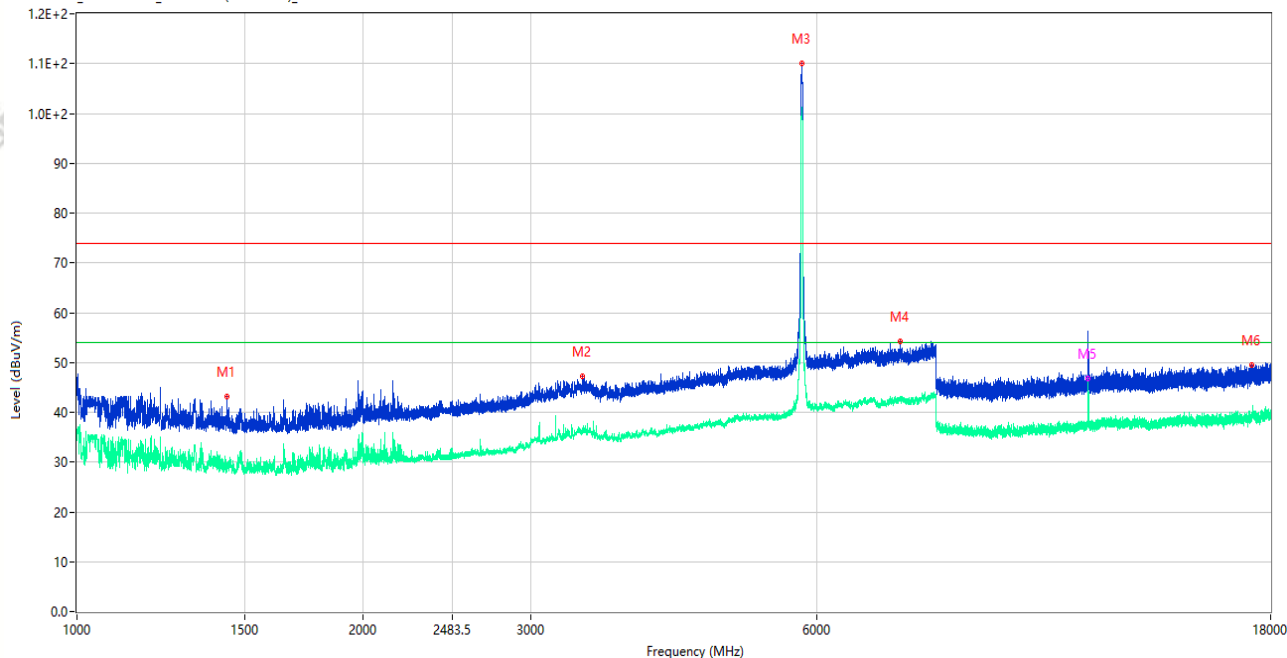

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.500	43.12	-15.96	74.0	30.88	Peak	140.00	150	Horizontal	Pass
1**	1439.500	29.52	-15.96	54.0	24.48	AV	140.00	150	Horizontal	Pass
2	3401.000	47.12	-5.63	74.0	26.88	Peak	144.00	150	Horizontal	Pass
2**	3401.000	36.39	-5.63	54.0	17.61	AV	144.00	150	Horizontal	Pass
3	5784.000	110.08	-1.54	74.0	-36.08	Peak	84.00	150	Horizontal	N/A
3**	5784.000	101.11	-1.54	54.0	-47.11	AV	84.00	150	Horizontal	N/A
4	7338.000	54.23	1.11	74.0	19.77	Peak	173.00	150	Horizontal	Pass
4**	7338.000	42.86	1.11	54.0	11.14	AV	173.00	150	Horizontal	Pass
5	11569.625	55.36	-2.29	74.0	18.64	Peak	28.00	150	Horizontal	Pass
5**	11569.625	46.73	-2.29	54.0	7.27	AV	28.00	150	Horizontal	Pass
6	17213.551	49.48	-0.55	74.0	24.52	Peak	313.00	150	Horizontal	Pass
6**	17213.551	39.87	-0.55	54.0	14.13	AV	313.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_19.00.09

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax40 CH159 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

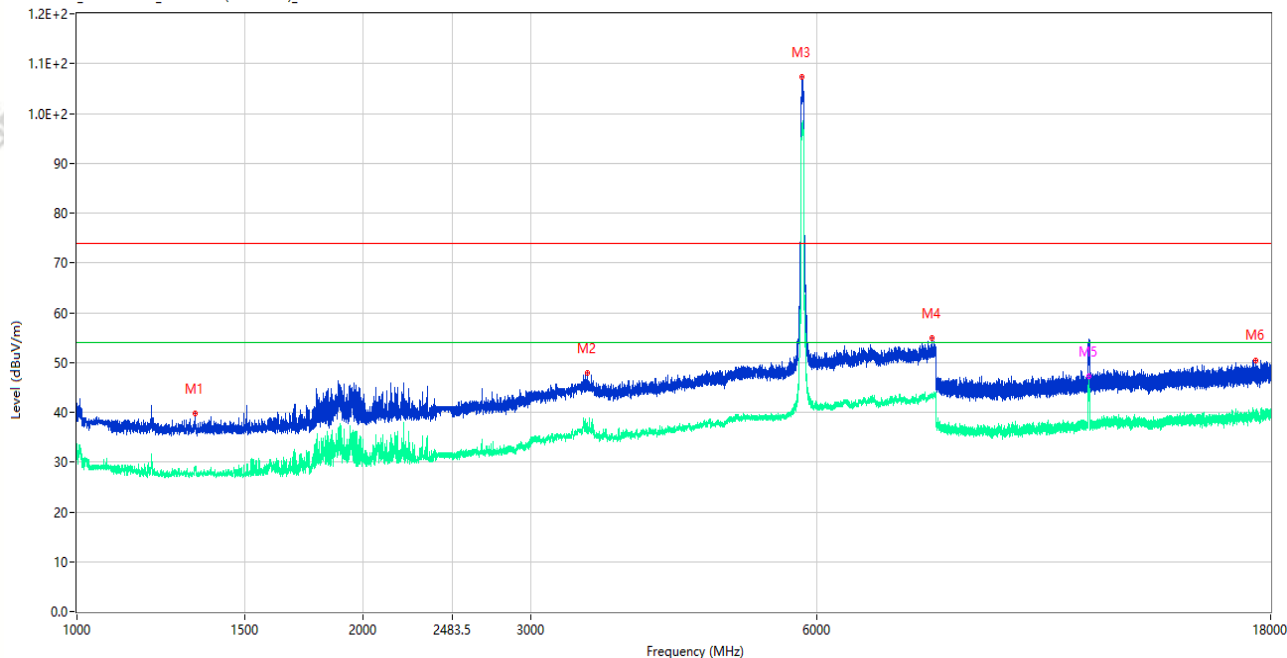

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.000	39.69	-16.00	74.0	34.31	Peak	127.00	150	Vertical	Pass
1**	1332.000	28.70	-16.00	54.0	25.30	AV	127.00	150	Vertical	Pass
2	3438.500	47.80	-5.30	74.0	26.20	Peak	360.00	150	Vertical	Pass
2**	3438.500	37.55	-5.30	54.0	16.45	AV	360.00	150	Vertical	Pass
3	5790.000	107.38	-1.52	74.0	-33.38	Peak	125.00	150	Vertical	N/A
3**	5790.000	97.76	-1.52	54.0	-43.76	AV	125.00	150	Vertical	N/A
4	7935.000	54.86	2.06	74.0	19.14	Peak	360.00	150	Vertical	Pass
4**	7935.000	43.58	2.06	54.0	10.42	AV	360.00	150	Vertical	Pass
5	11593.850	51.22	-2.39	74.0	22.78	Peak	28.00	150	Vertical	Pass
5**	11593.850	47.25	-2.39	54.0	6.75	AV	28.00	150	Vertical	Pass
6	17347.162	50.49	0.12	74.0	23.51	Peak	346.00	150	Vertical	Pass
6**	17347.162	39.24	0.12	54.0	14.76	AV	346.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_18.54.19

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax40 CH159 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

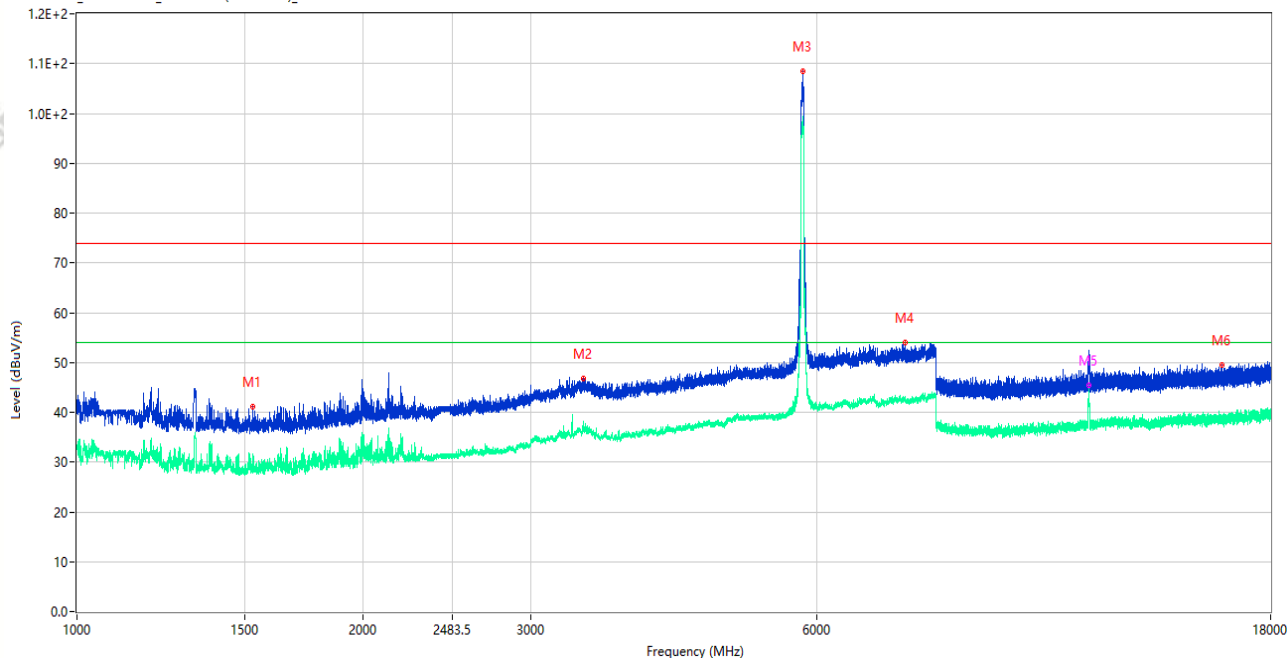

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1531.000	41.07	-16.05	74.0	32.93	Peak	158.00	150	Horizontal	Pass
1**	1531.000	30.38	-16.05	54.0	23.62	AV	158.00	150	Horizontal	Pass
2	3407.000	46.71	-5.36	74.0	27.29	Peak	16.00	150	Horizontal	Pass
2**	3407.000	37.58	-5.36	54.0	16.42	AV	16.00	150	Horizontal	Pass
3	5799.500	108.47	-1.43	74.0	-34.47	Peak	83.00	150	Horizontal	N/A
3**	5799.500	98.96	-1.43	54.0	-44.96	AV	83.00	150	Horizontal	N/A
4	7424.000	53.96	1.09	74.0	20.04	Peak	163.00	150	Horizontal	Pass
4**	7424.000	42.60	1.09	54.0	11.40	AV	163.00	150	Horizontal	Pass
5	11589.576	50.74	-2.29	74.0	23.26	Peak	74.00	150	Horizontal	Pass
5**	11589.576	45.40	-2.29	54.0	8.60	AV	74.00	150	Horizontal	Pass
6	16017.599	49.43	-2.27	74.0	24.57	Peak	360.00	150	Horizontal	Pass
6**	16017.599	37.87	-2.27	54.0	16.13	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.45.27

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax80 CH155 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

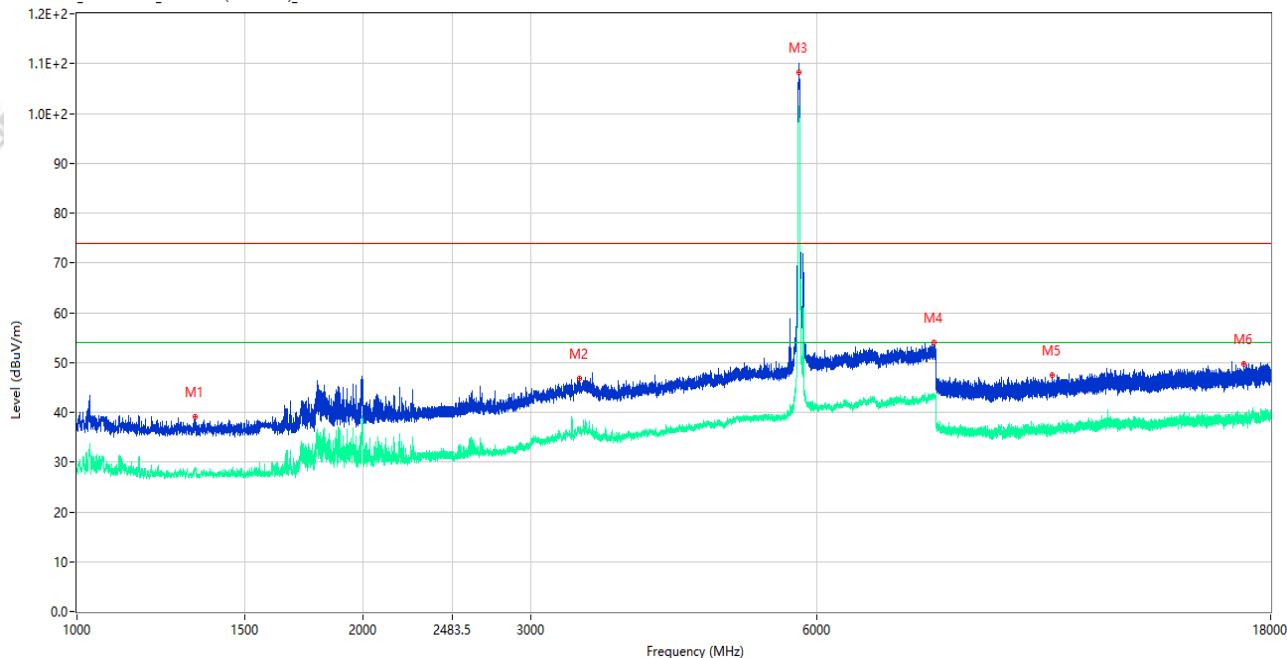

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.750	39.16	-16.01	74.0	34.84	Peak	123.00	150	Vertical	Pass
1**	1332.750	28.45	-16.01	54.0	25.55	AV	123.00	150	Vertical	Pass
2	3378.500	46.78	-5.02	74.0	27.22	Peak	312.00	150	Vertical	Pass
2**	3378.500	35.63	-5.02	54.0	18.37	AV	312.00	150	Vertical	Pass
3	5744.000	108.26	-2.18	74.0	-34.26	Peak	360.00	150	Vertical	N/A
3**	5744.000	99.38	-2.18	54.0	-45.38	AV	360.00	150	Vertical	N/A
4	7959.500	54.02	2.36	74.0	19.98	Peak	249.00	150	Vertical	Pass
4**	7959.500	43.08	2.36	54.0	10.92	AV	249.00	150	Vertical	Pass
5	10604.900	47.52	-3.65	74.0	26.48	Peak	193.00	150	Vertical	Pass
5**	10604.900	36.68	-3.65	54.0	17.32	AV	193.00	150	Vertical	Pass
6	16863.636	49.80	-0.78	74.0	24.20	Peak	345.00	150	Vertical	Pass
6**	16863.636	38.19	-0.78	54.0	15.81	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060546

Test Time: 2026-07-25_14.41.39

EUT Name: Mobile Computer

Temp.(°C): 22.8

Model Number: RS20

Humidity (%RH): 53

Sample Number: CC26030105-001-S12

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax80 CH155 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A11+数据线: A45
ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

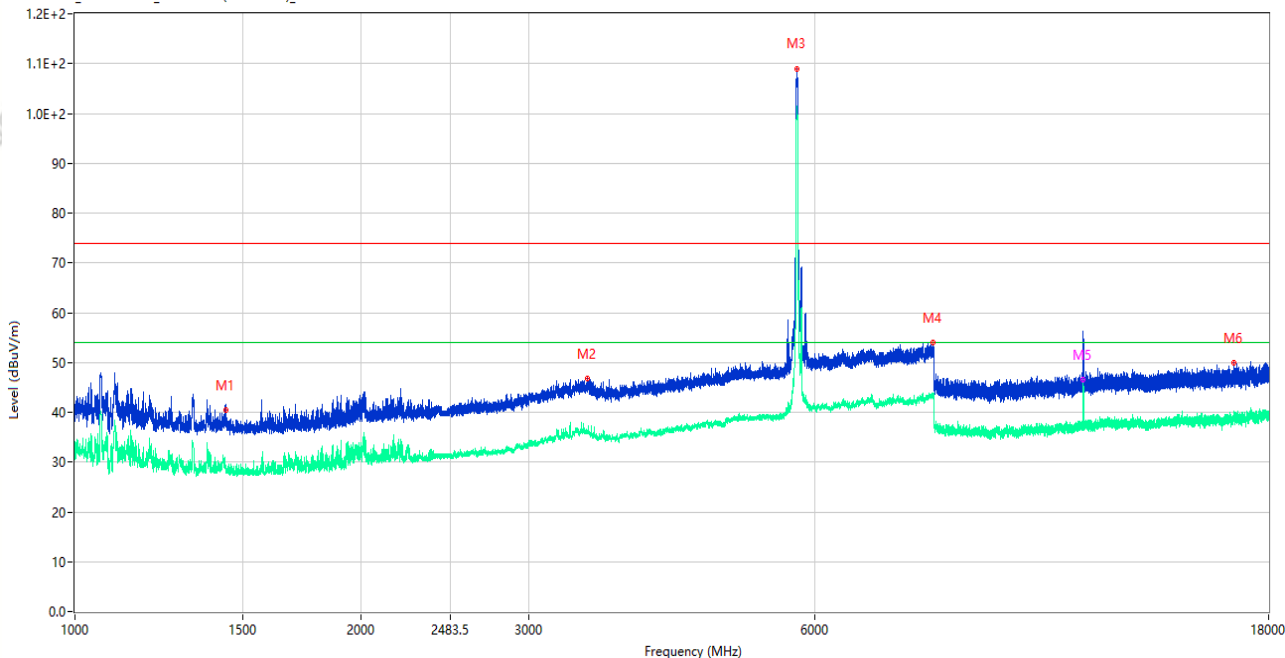

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.750	40.35	-15.94	74.0	33.65	Peak	141.00	150	Horizontal	Pass
1**	1440.750	29.38	-15.94	54.0	24.62	AV	141.00	150	Horizontal	Pass
2	3460.500	46.72	-4.95	74.0	27.28	Peak	339.00	150	Horizontal	Pass
2**	3460.500	36.29	-4.95	54.0	17.71	AV	339.00	150	Horizontal	Pass
3	5746.500	109.02	-2.14	74.0	-35.02	Peak	48.00	150	Horizontal	N/A
3**	5746.500	101.15	-2.14	54.0	-47.15	AV	48.00	150	Horizontal	N/A
4	7987.500	53.91	1.87	74.0	20.09	Peak	339.00	150	Horizontal	Pass
4**	7987.500	43.01	1.87	54.0	10.99	AV	339.00	150	Horizontal	Pass
5	11490.062	53.90	-3.20	74.0	20.10	Peak	0.00	150	Horizontal	Pass
5**	11490.062	46.46	-3.20	54.0	7.54	AV	0.00	150	Horizontal	Pass
6	16547.849	49.99	-1.29	74.0	24.01	Peak	360.00	150	Horizontal	Pass
6**	16547.849	38.18	-1.29	54.0	15.82	AV	360.00	150	Horizontal	Pass