


File name: E004873C.RES
Date: 06. Apr 04 20:11

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	1ms	AUTO LN	OFF
1M	10M	10k	9k	QP+AV	1ms	AUTO LN	OFF
10M	30M	50k	9k	QP+AV	1ms	AUTO LN	OFF

Transducer No.	Start	Stop	Name
2	150k	30M	LIMITER

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

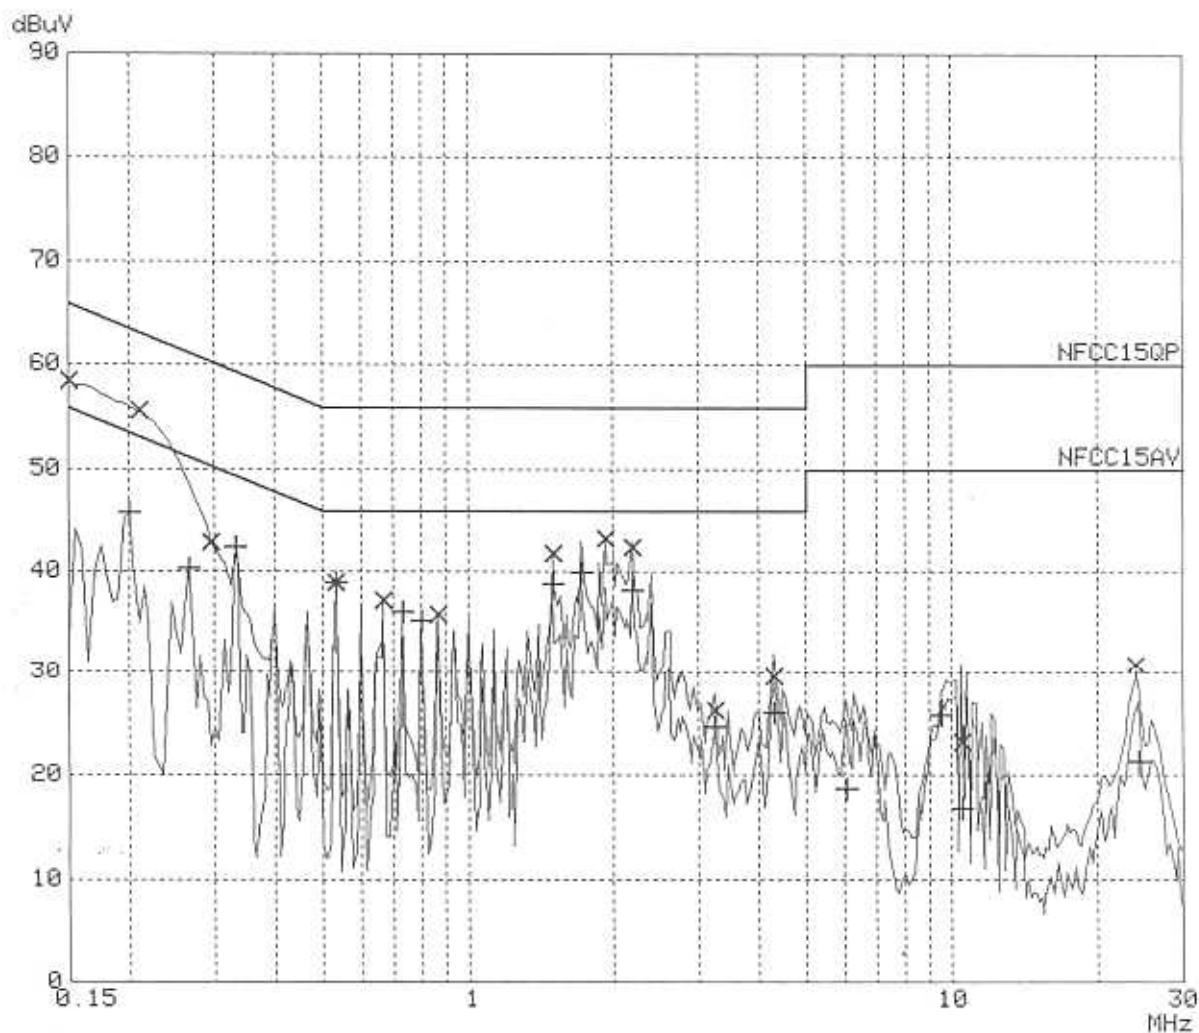

File name: E004873C.RES
Date: 06. Apr 04 20:11



CMA Testing
and Certification
Laboratories
國家實驗中心

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dB	Delta Limit dB	Phase -	PE -
0.15000	58.5	-7.4	L1	f1
0.21000	55.7	-7.5	L1	f1
0.29500	43.0	-17.3	L1	f1
0.53000	39.0	-16.9	N	f1
0.66500	37.2	-18.7	N	f1
0.86500	35.9	-20.1	N	f1
1.50000	41.8	-14.1	L1	f1
1.93000	43.3	-12.6	N	f1
2.19000	42.5	-13.5	N	f1
3.25000	26.3	-29.6	L1	f1
4.30000	29.7	-26.2	N	f1
10.50000	23.2	-36.8	N	f1
24.00000	30.9	-29.0	N	f1

Frequency MHz	AV Level dB	Delta Limit dB	Phase -	PE -
0.20000	45.9	-7.7	N	f1
0.26500	40.4	-10.9	N	f1
0.33000	42.5	-6.9	N	f1
0.53000	38.9	-7.0	L1	f1
0.73000	36.1	-9.8	N	f1
0.80000	35.2	-10.7	N	f1
1.50000	38.9	-7.0	N	f1
1.71000	40.0	-5.9	N	f1
2.19000	38.2	-7.7	L1	f1
3.24000	24.7	-21.2	L1	f1
4.30000	26.0	-19.9	N	f1
6.04000	18.7	-31.2	N	f1
9.51000	25.8	-24.1	N	f1
10.50000	16.8	-33.1	N	f1
24.25000	21.4	-28.5	L1	f1

* limit exceeded