


Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

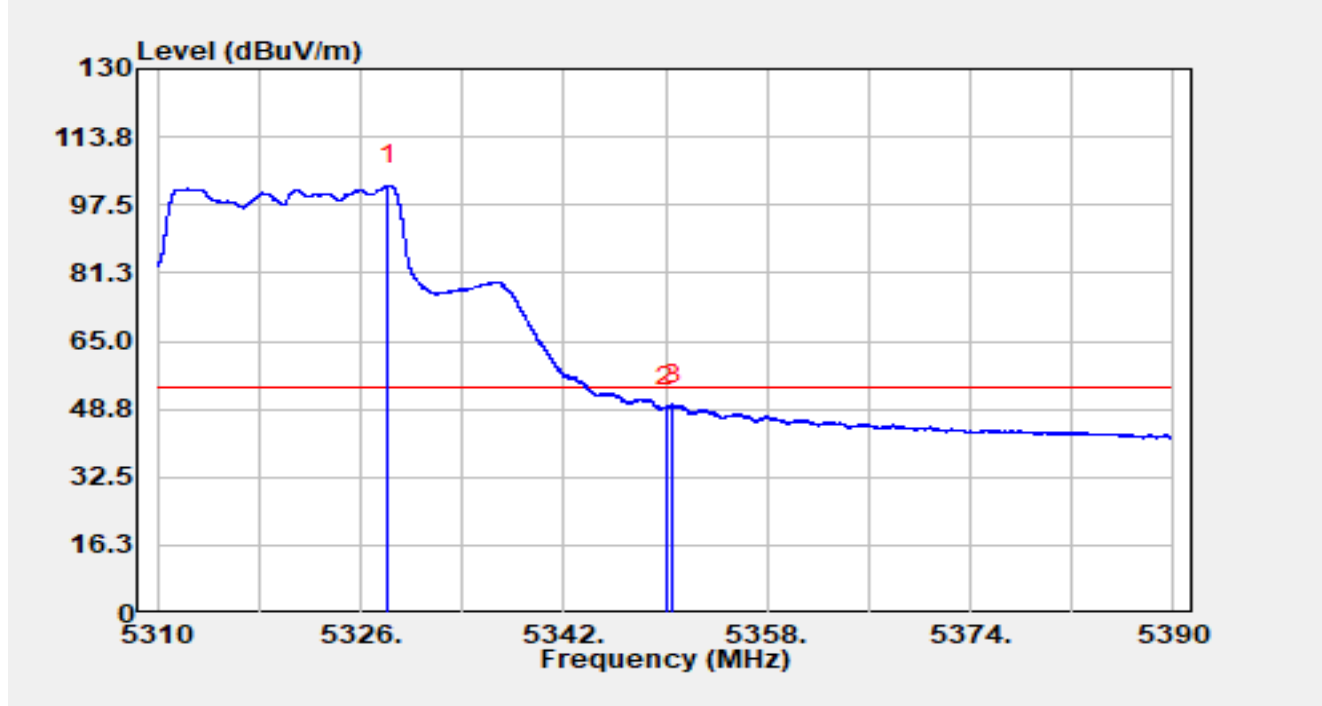


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.112	61.71	40.41	102.12	N/A	N/A	Average
2		5350.000	50.48	-1.38	49.10	-4.90	54.00	Average
3	*	5350.568	51.66	-1.68	49.99	-4.01	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

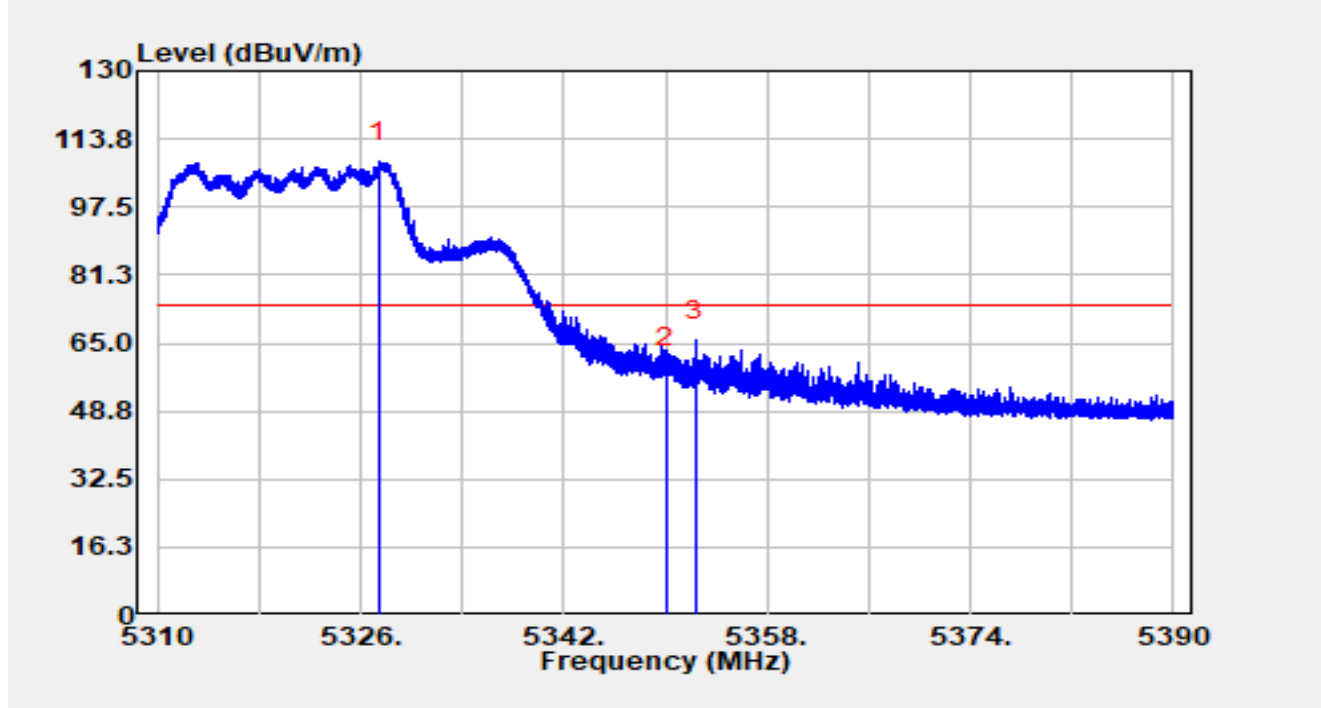


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.440	68.41	39.78	108.19	N/A	N/A	Peak
2		5350.000	60.43	-1.38	59.05	-14.95	74.00	Peak
3	*	5352.392	67.92	-2.37	65.55	-8.45	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

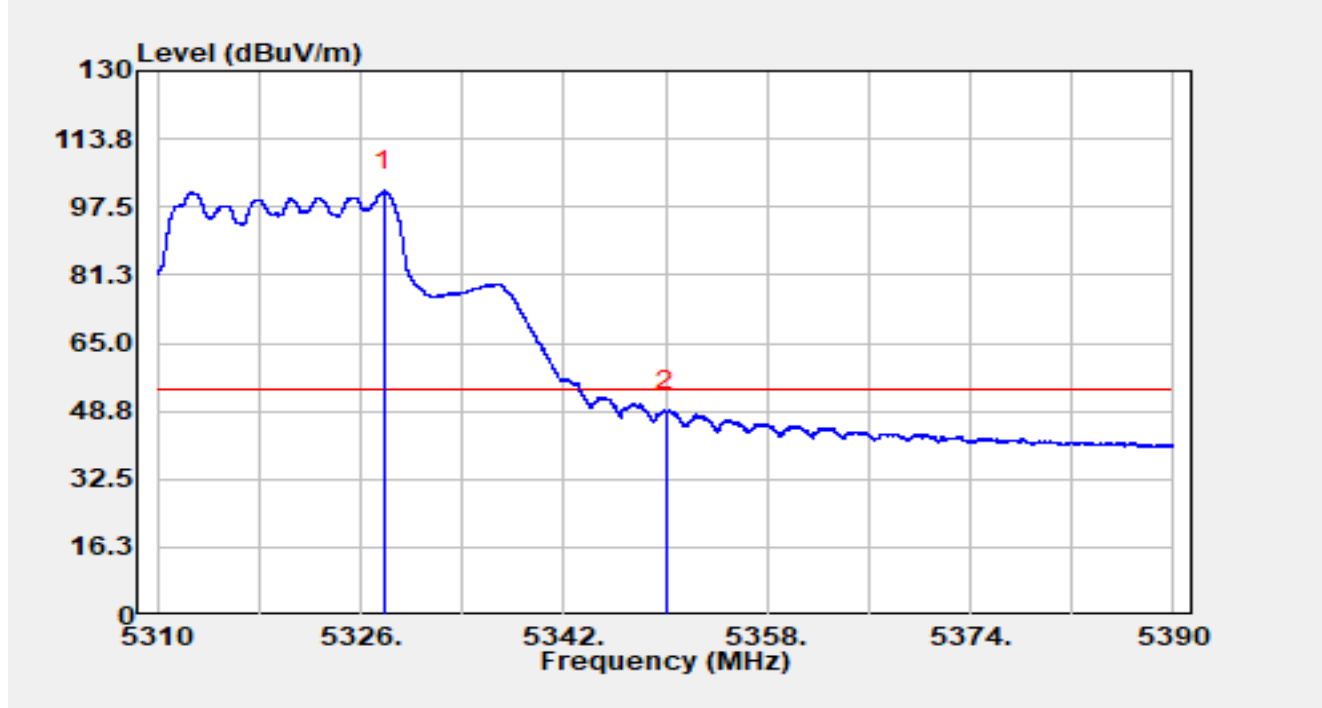


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.872	61.24	40.20	101.44	N/A	N/A	Average
2	*	5350.000	50.17	-1.38	48.80	-5.20	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

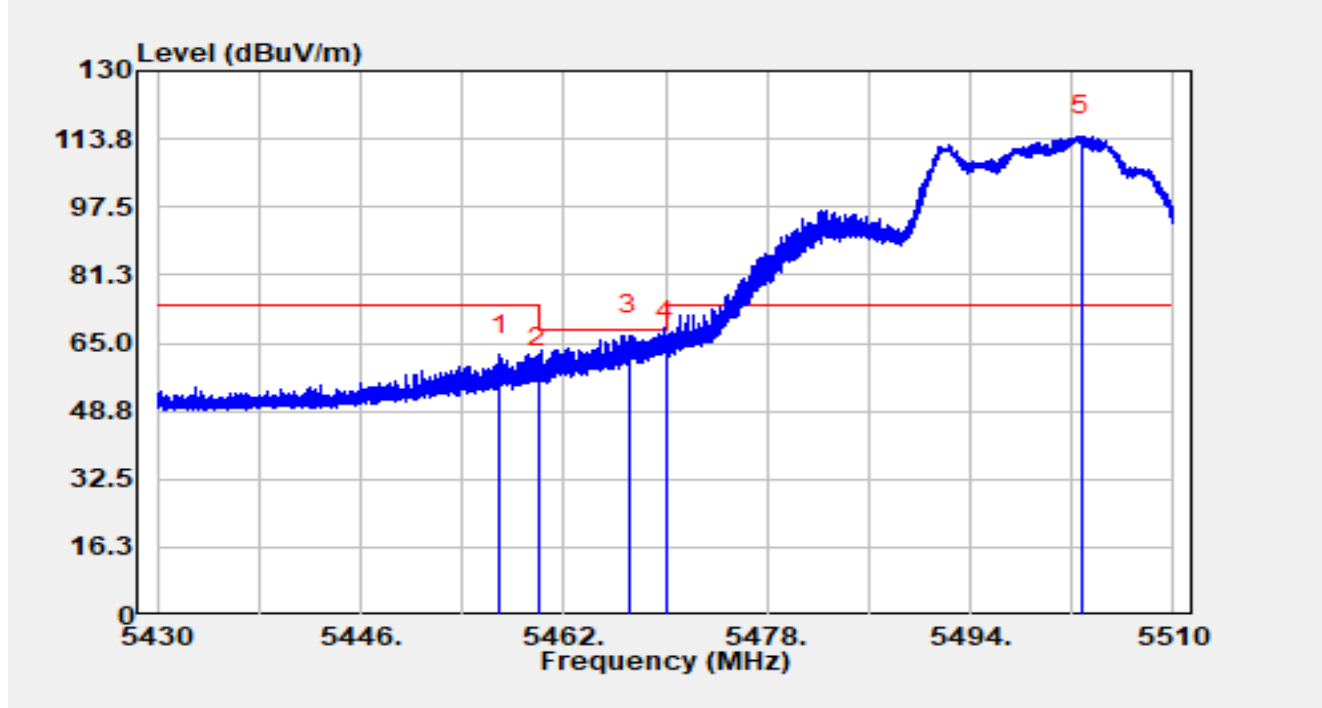


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.992	65.01	-2.80	62.20	-11.80	74.00	Peak
2		5460.000	61.58	-2.55	59.03	-9.17	68.20	Peak
3	*	5467.144	68.53	-1.64	66.89	-1.31	68.20	Peak
4		5470.000	66.09	-0.76	65.33	-2.87	68.20	Peak
5		5502.696	72.33	42.20	114.53	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

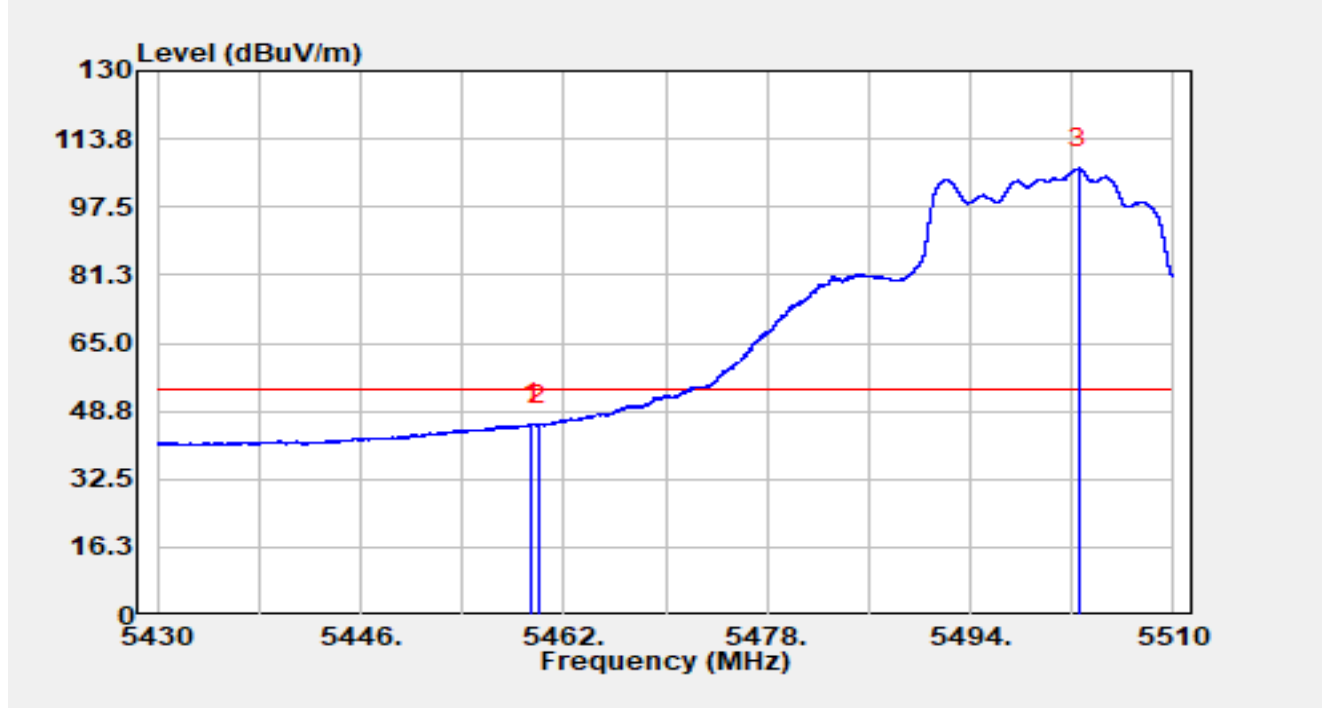


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.512	48.42	-2.62	45.79	-8.21	54.00	Average
2		5460.000	48.02	-2.55	45.46	-8.54	54.00	Average
3		5502.536	64.86	41.86	106.72	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

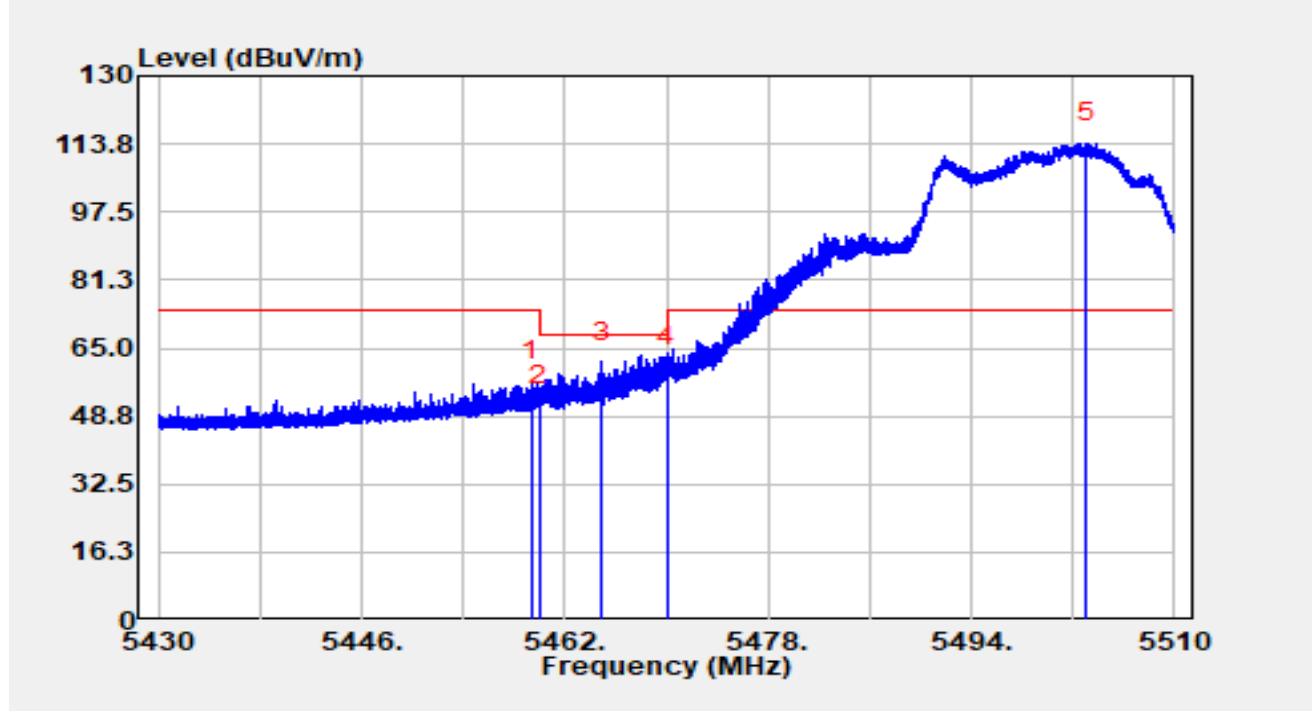


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.408	59.69	-2.63	57.06	-16.94	74.00	Peak
2		5460.000	53.68	-2.55	51.13	-17.07	68.20	Peak
3	*	5464.896	63.67	-2.08	61.59	-6.61	68.20	Peak
4		5470.000	61.22	-0.76	60.46	-7.74	68.20	Peak
5		5503.088	70.96	43.03	113.99	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

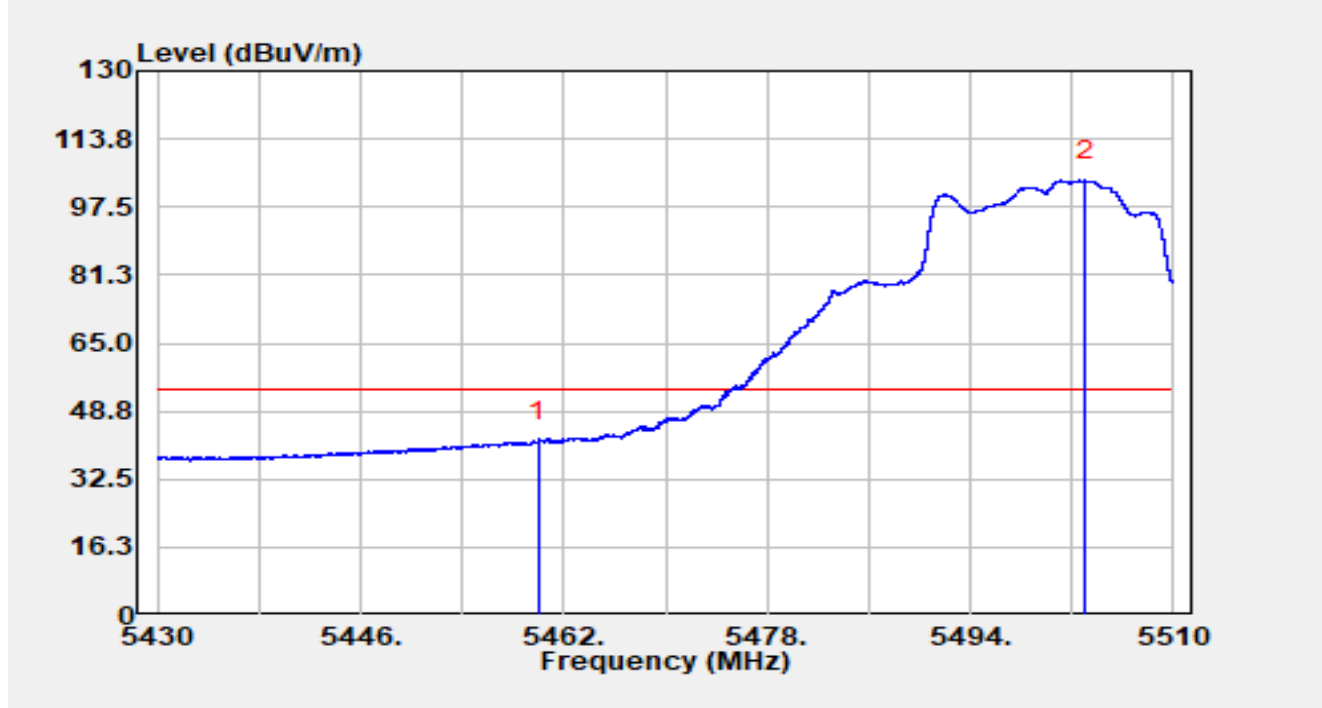


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	44.24	-2.55	41.68	-12.32	54.00	Average
2		5503.064	60.88	42.98	103.86	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

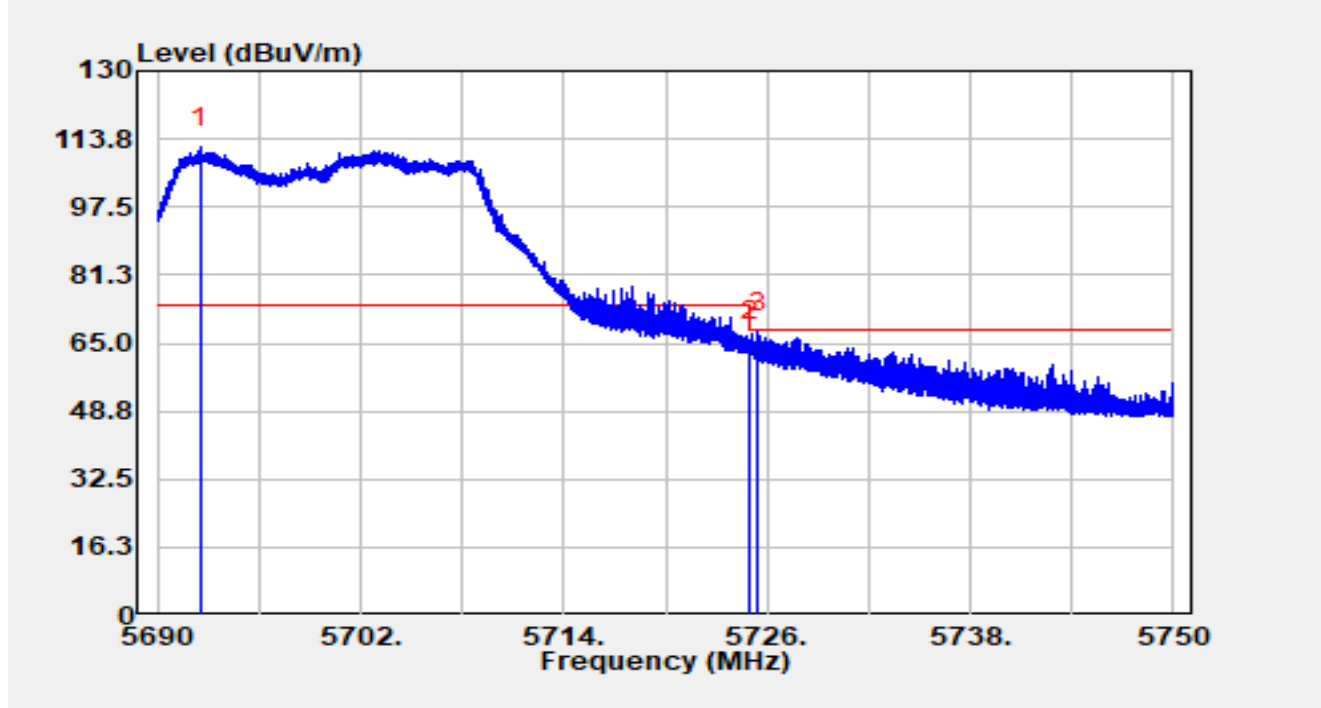


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.556	69.88	41.73	111.61	N/A	N/A	Peak
2		5725.000	66.20	-0.89	65.30	-2.90	68.20	Peak
3	*	5725.460	68.74	-1.15	67.59	-0.61	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

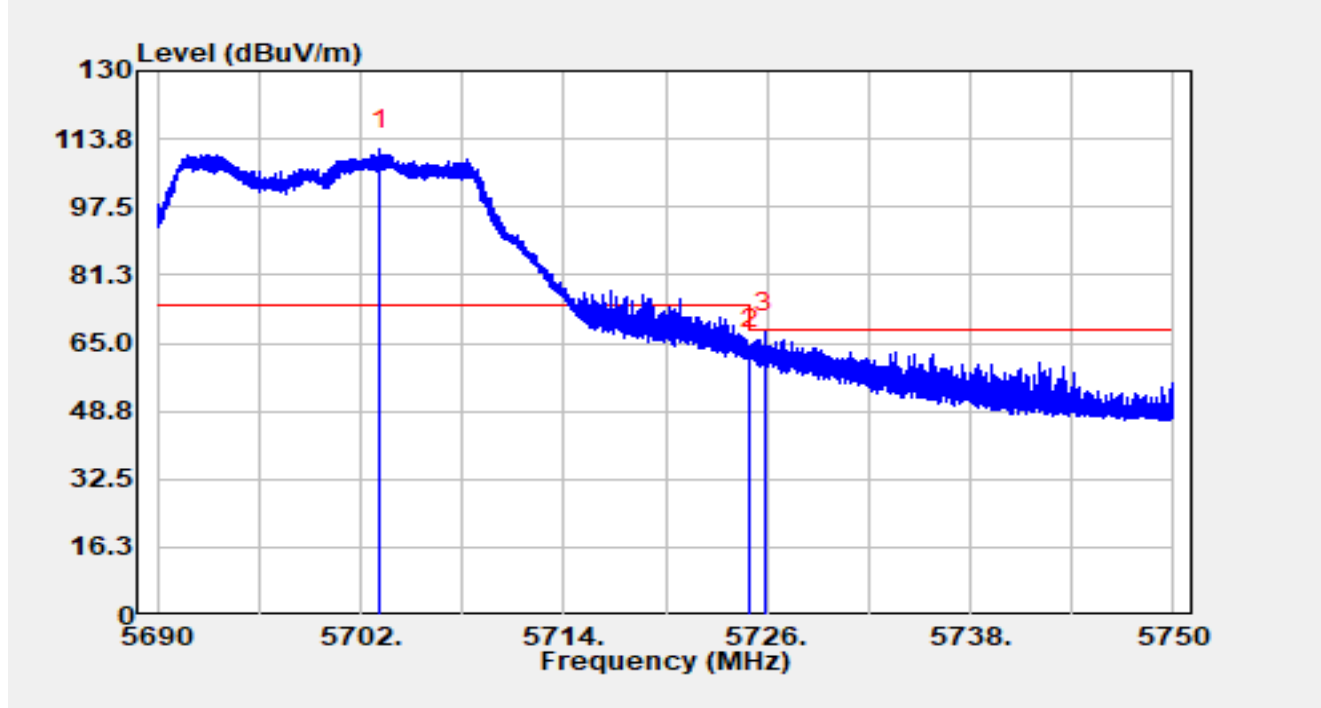


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.140	72.57	38.70	111.27	N/A	N/A	Peak
2		5725.000	64.19	-0.89	63.29	-4.91	68.20	Peak
3	*	5725.838	69.05	-1.36	67.69	-0.51	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

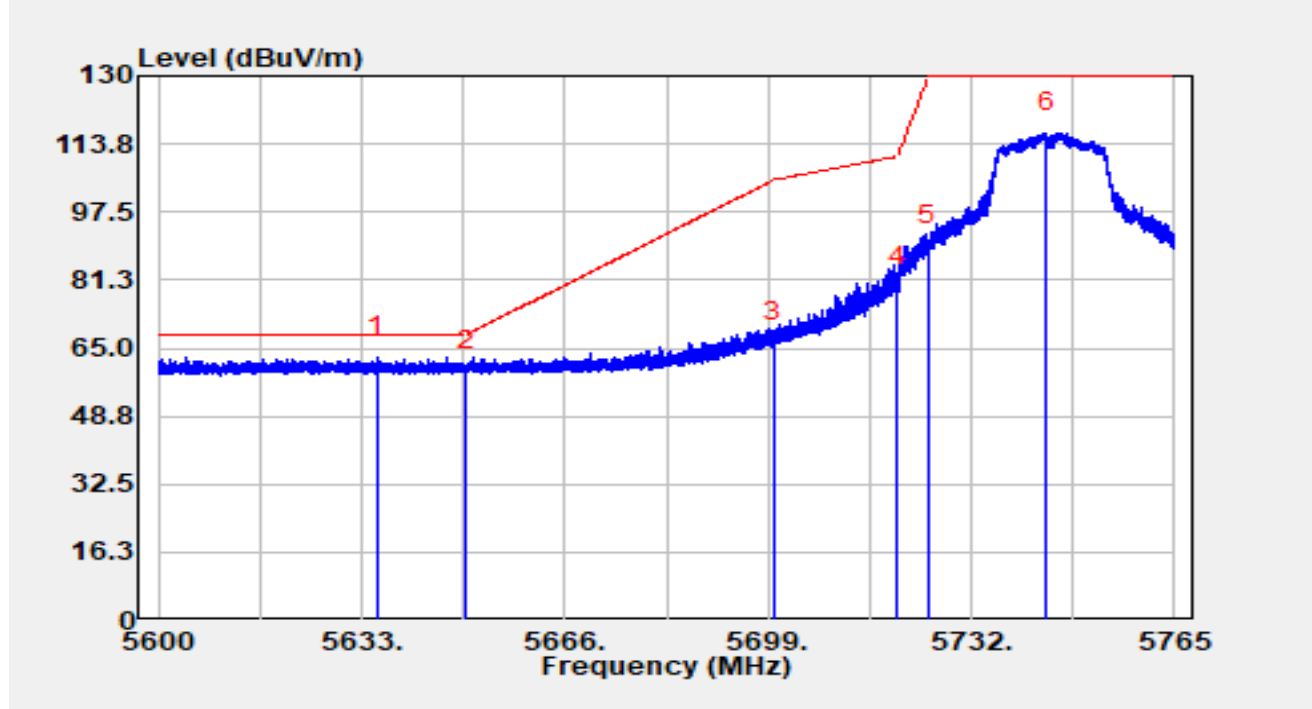


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5635.425	70.63	-7.63	63.01	-5.19	68.20	Peak
2		5650.000	67.36	-7.67	59.69	-8.51	68.20	Peak
3		5700.000	73.82	-7.49	66.34	-38.86	105.20	Peak
4		5720.000	87.12	-7.37	79.74	-31.06	110.80	Peak
5		5725.000	96.82	-7.36	89.46	-40.54	130.00	Peak
6		5744.292	124.03	-7.57	116.46	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

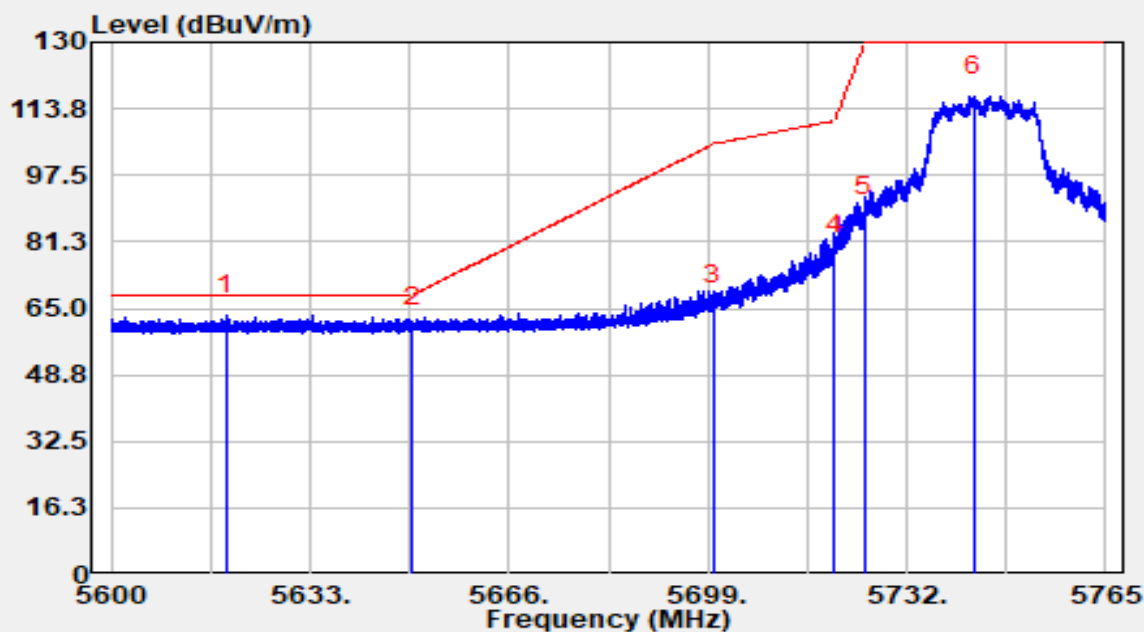


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5619.140	70.87	-7.54	63.33	-4.87	68.20	Peak
2		5650.000	68.13	-7.67	60.46	-7.74	68.20	Peak
3		5700.000	73.63	-7.49	66.14	-39.06	105.20	Peak
4		5720.000	85.47	-7.37	78.10	-32.70	110.80	Peak
5		5725.000	94.80	-7.36	87.44	-42.56	130.00	Peak
6		5743.154	124.37	-7.57	116.80	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

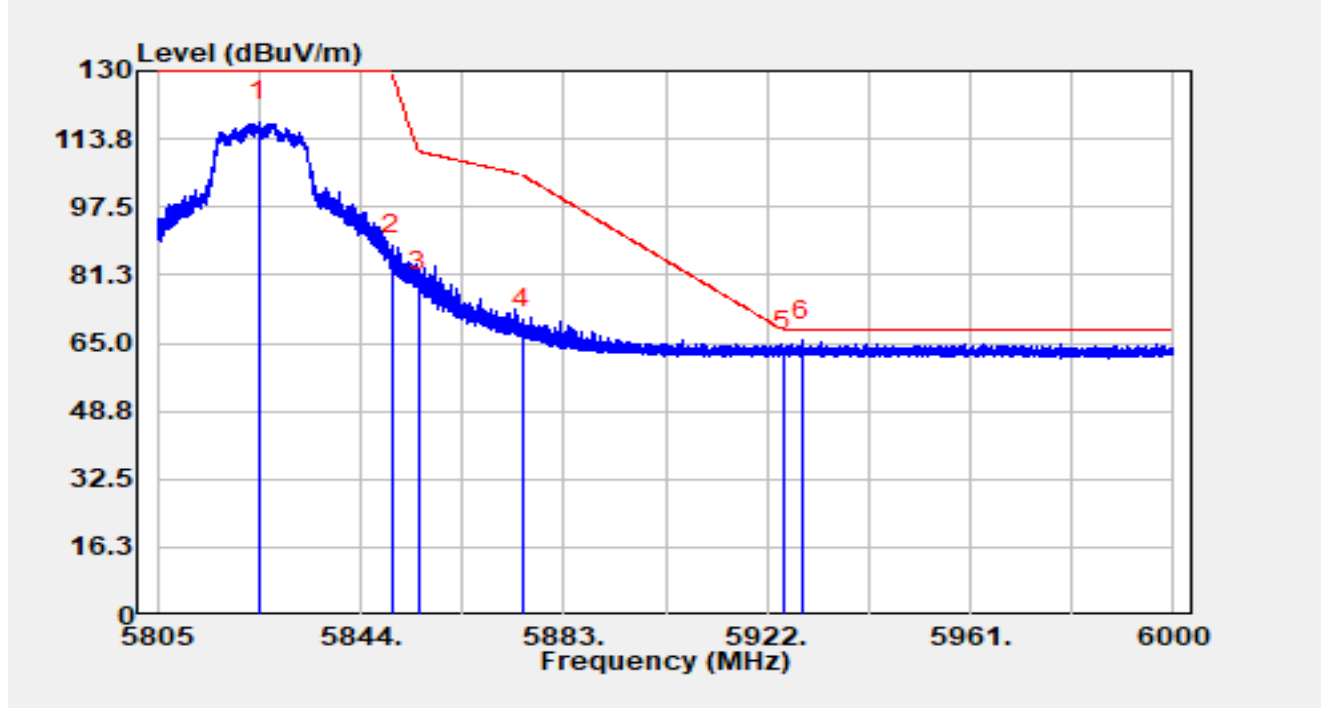


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5824.441	123.56	-5.74	117.82	N/A	N/A	Peak
2		5850.000	91.60	-5.64	85.97	-44.03	130.00	Peak
3		5855.000	83.08	-5.69	77.39	-33.41	110.80	Peak
4		5875.000	73.97	-5.74	68.23	-36.97	105.20	Peak
5		5925.000	68.62	-5.59	63.03	-5.17	68.20	Peak
6	*	5928.747	71.10	-5.55	65.55	-2.65	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

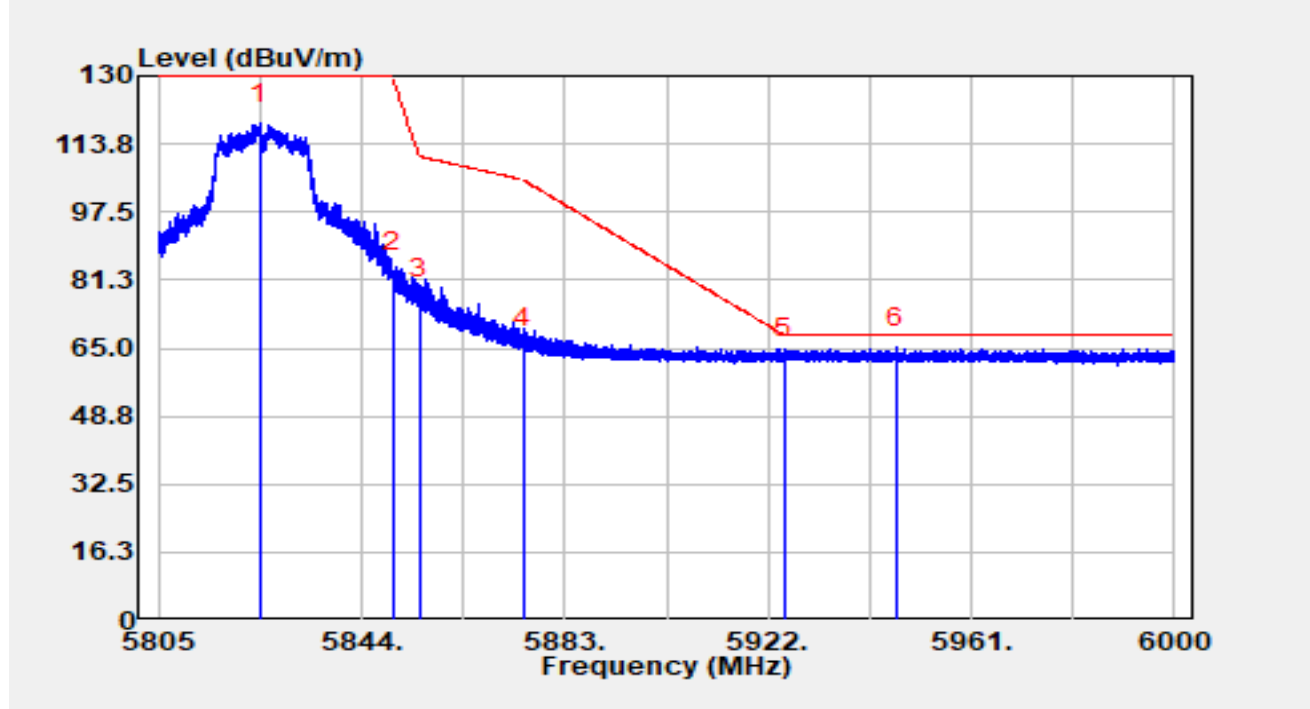


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5824.402	124.45	-5.74	118.71	N/A	N/A	Peak
2		5850.000	88.65	-5.64	83.01	-46.99	130.00	Peak
3		5855.000	82.47	-5.69	76.79	-34.01	110.80	Peak
4		5875.000	70.84	-5.74	65.10	-40.10	105.20	Peak
5		5925.000	68.35	-5.59	62.76	-5.44	68.20	Peak
6	*	5946.492	70.71	-5.69	65.02	-3.18	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

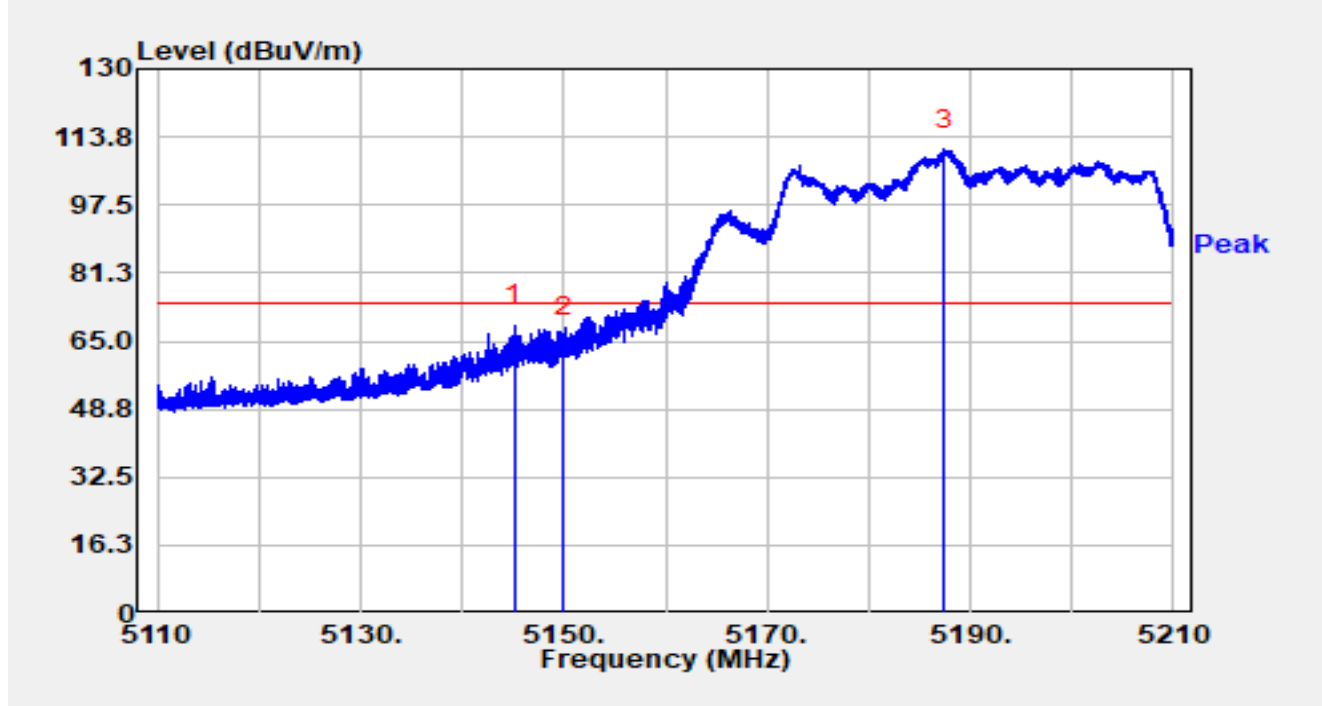


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.140	69.48	-0.65	68.83	-5.17	74.00	Peak
2		5150.000	65.95	0.18	66.13	-7.87	74.00	Peak
3		5187.460	71.00	39.63	110.63	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

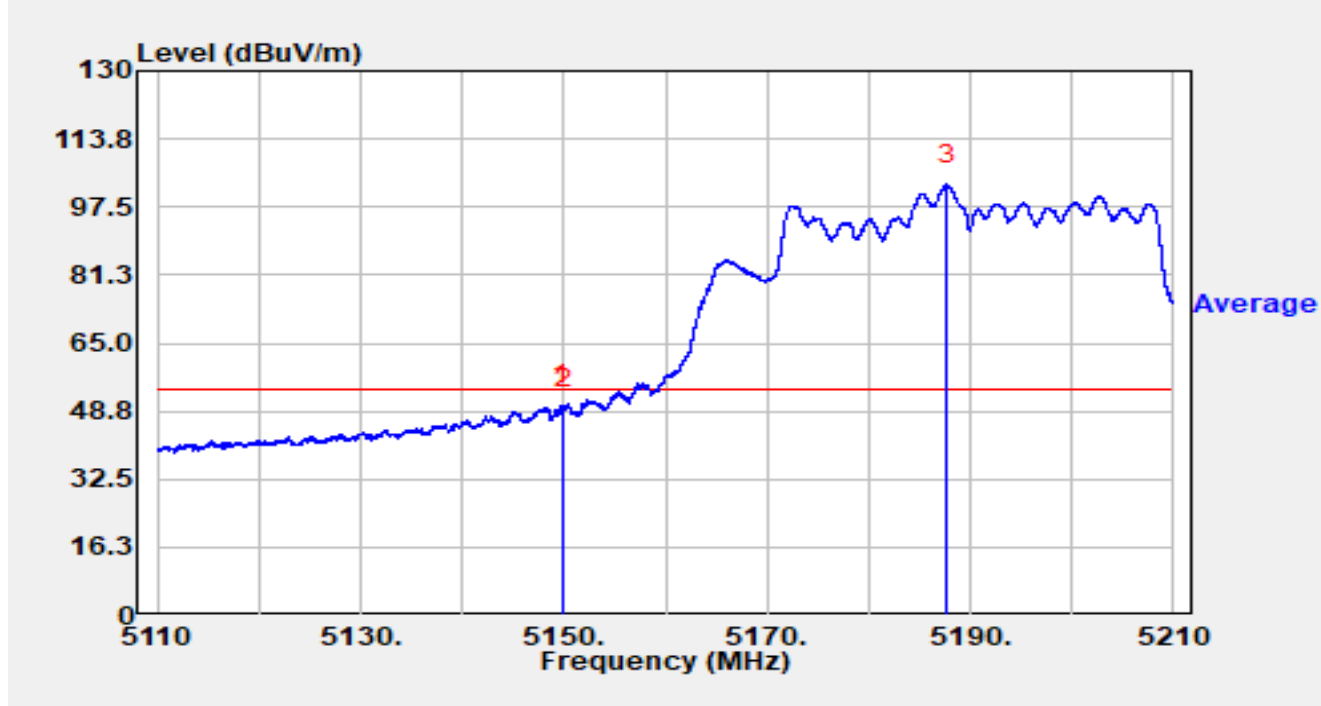


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.800	49.94	0.15	50.09	-3.91	54.00	Average
2		5150.000	49.06	0.18	49.24	-4.76	54.00	Average
3		5187.740	62.78	40.00	102.78	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

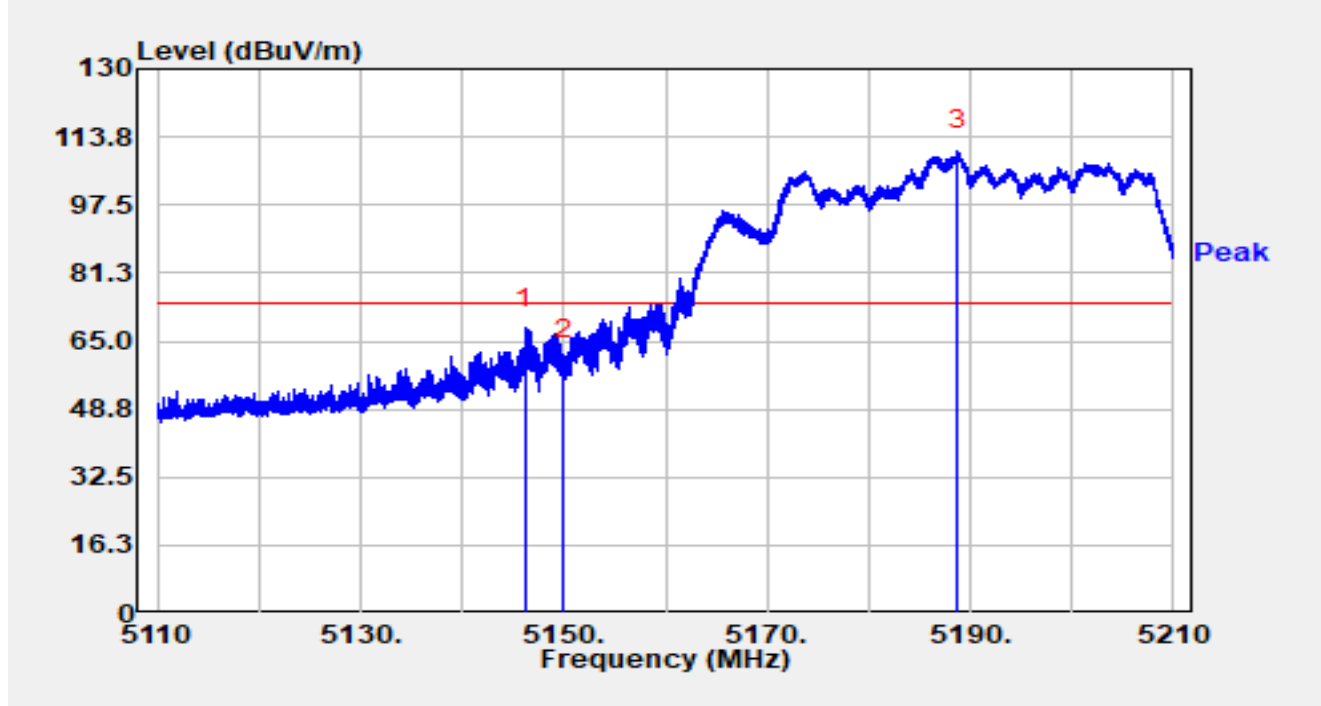


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.120	68.54	-0.50	68.04	-5.96	74.00	Peak
2		5150.000	60.47	0.18	60.64	-13.36	74.00	Peak
3		5188.780	68.81	41.59	110.40	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

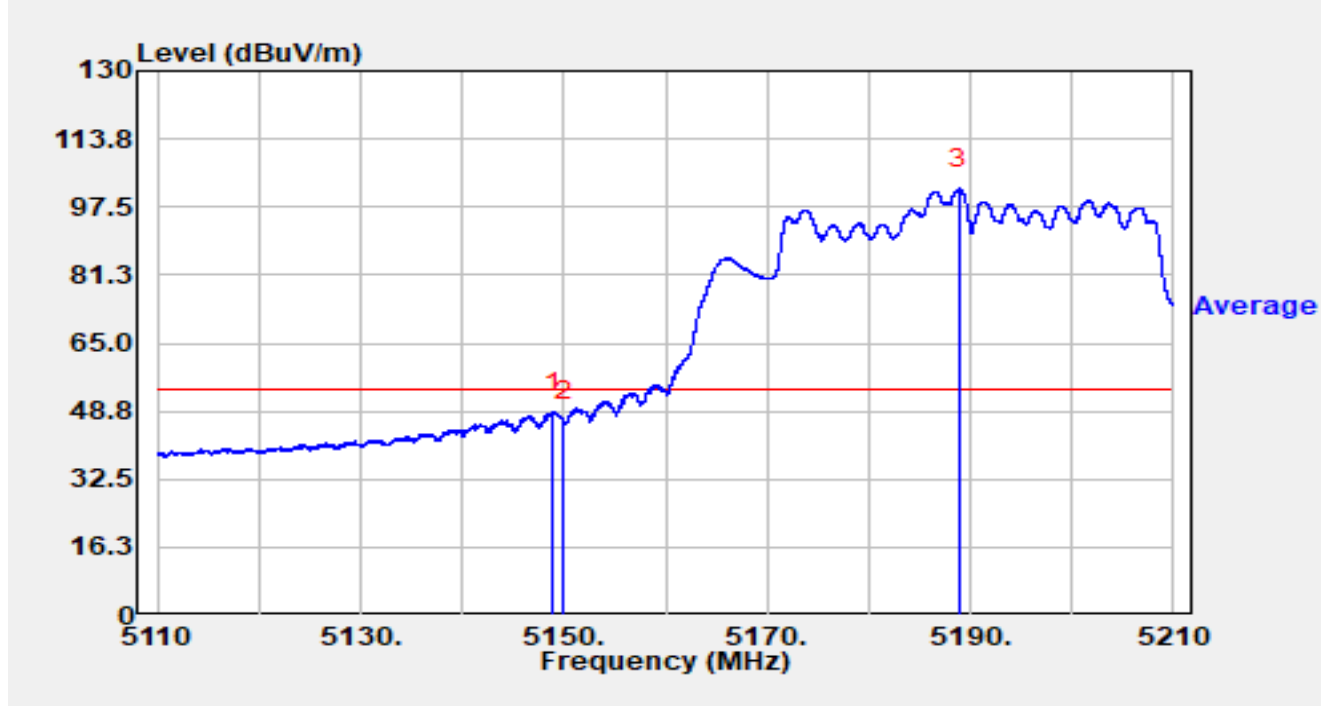


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.990	48.42	-0.02	48.40	-5.60	54.00	Average
2		5150.000	46.16	0.18	46.33	-7.67	54.00	Average
3		5188.880	60.10	41.72	101.82	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

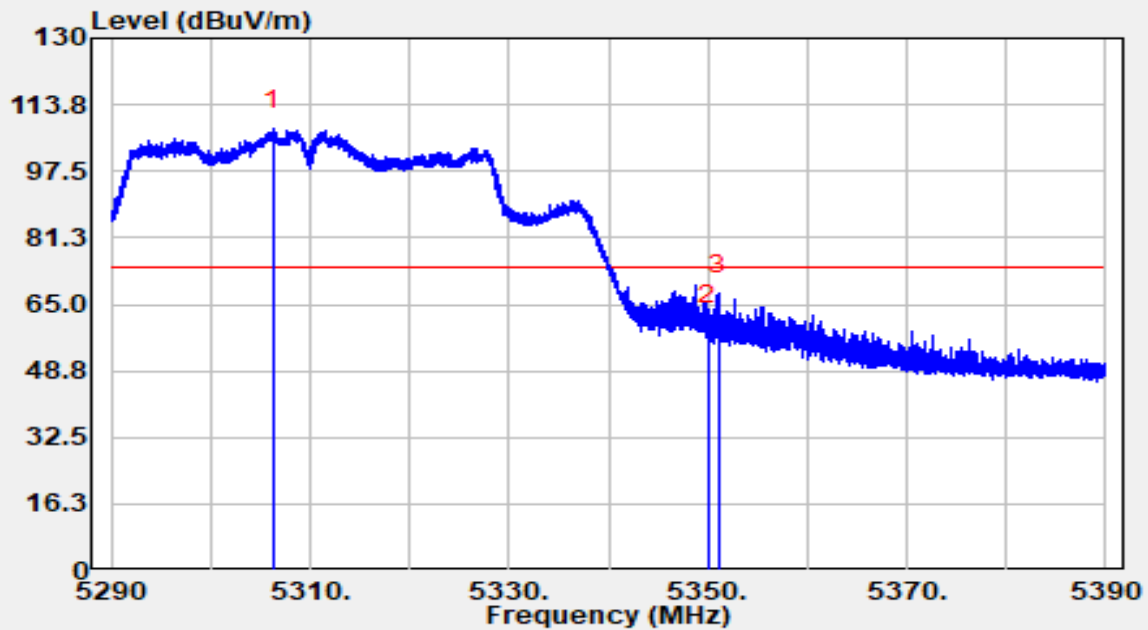


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5306.270	68.17	39.62	107.79	N/A	N/A	Peak
2		5350.000	61.37	-1.38	59.99	-14.01	74.00	Peak
3	*	5351.070	69.55	-1.92	67.63	-6.37	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

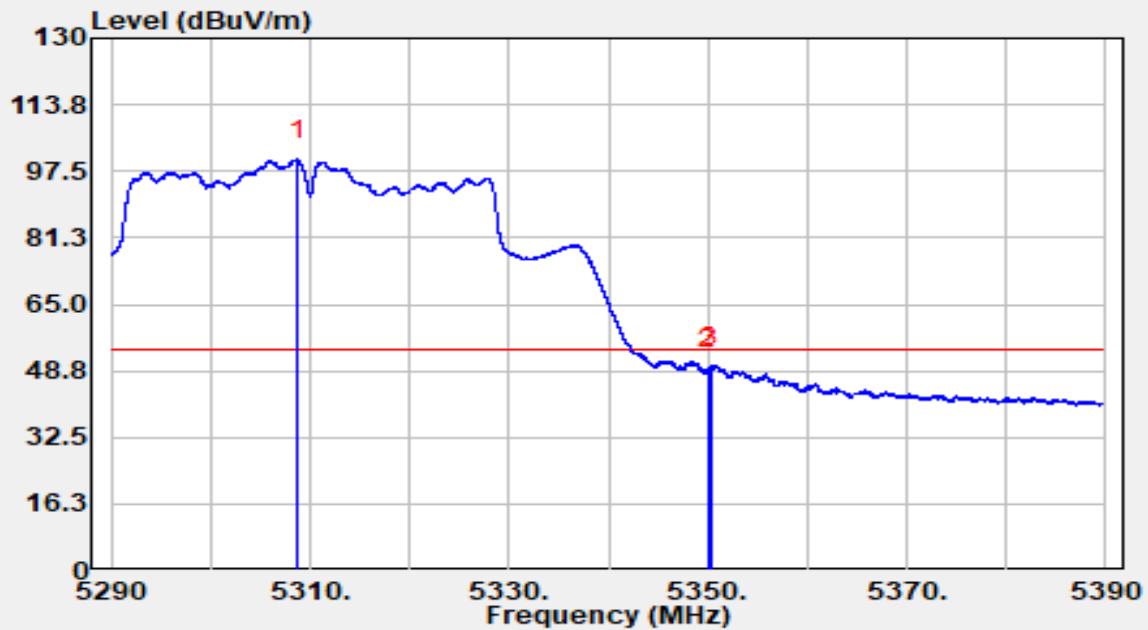


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.750	58.99	41.44	100.43	N/A	N/A	Average
2		5350.000	50.64	-1.38	49.26	-4.74	54.00	Average
3	*	5350.240	51.39	-1.51	49.89	-4.11	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

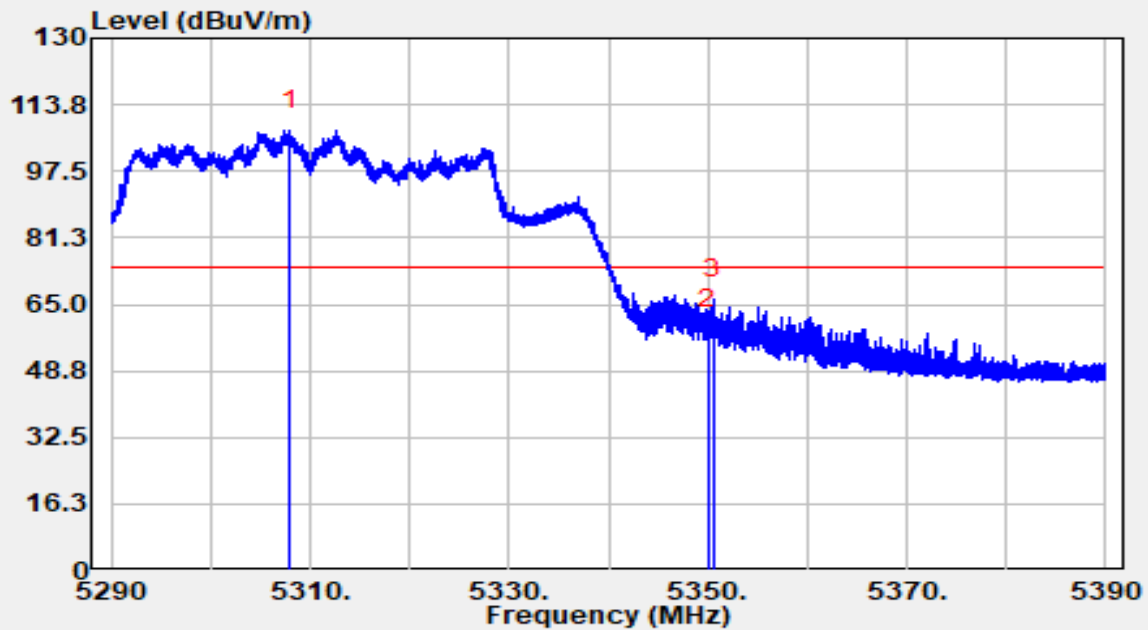


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.020	66.88	40.75	107.62	N/A	N/A	Peak
2		5350.000	60.54	-1.38	59.16	-14.84	74.00	Peak
3	*	5350.560	68.05	-1.67	66.37	-7.63	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

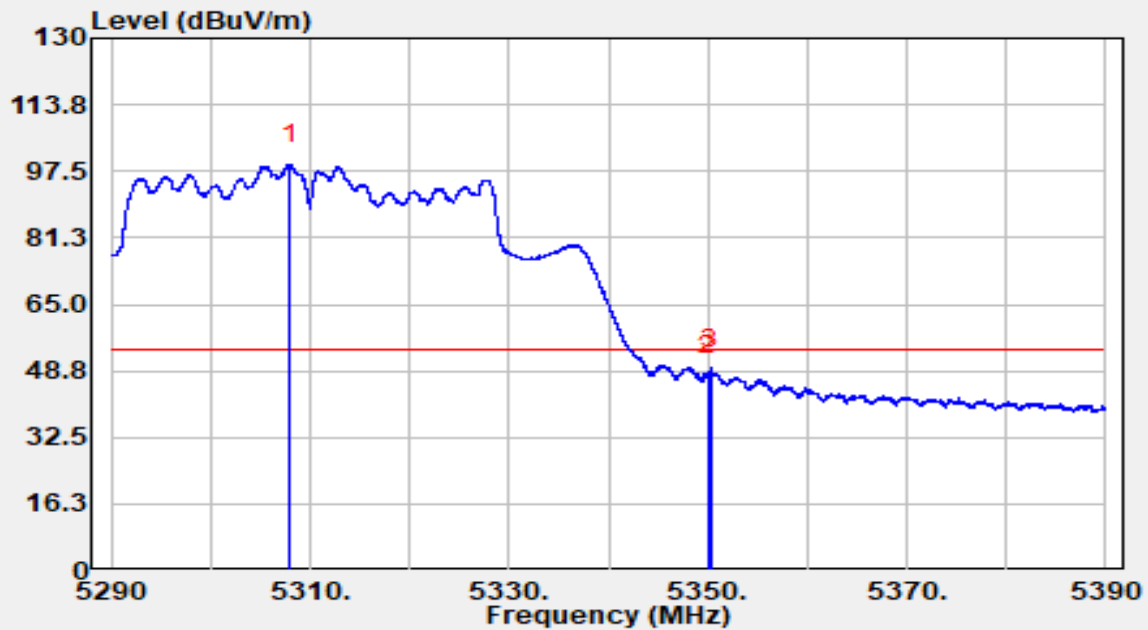


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.030	58.44	40.76	99.19	N/A	N/A	Average
2		5350.000	49.16	-1.38	47.78	-6.22	54.00	Average
3	*	5350.320	51.07	-1.55	49.52	-4.48	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

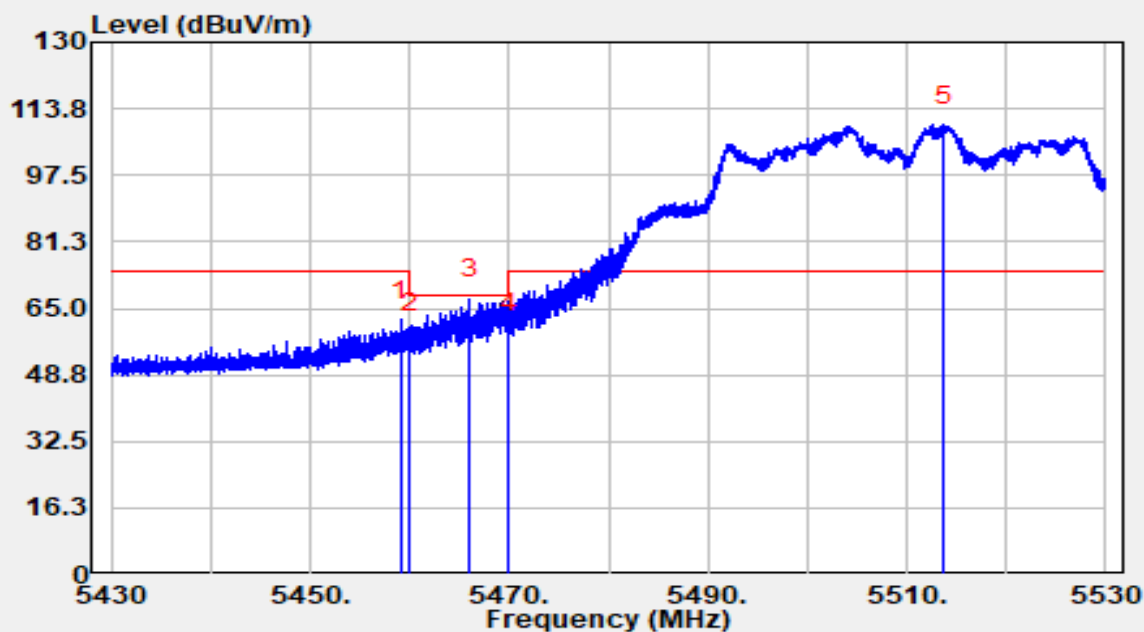


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.110	64.85	-2.66	62.19	-11.81	74.00	Peak
2		5460.000	61.72	-2.55	59.17	-9.03	68.20	Peak
3	*	5465.990	69.14	-1.88	67.26	-0.94	68.20	Peak
4		5470.000	59.98	-0.76	59.22	-8.98	68.20	Peak
5		5513.750	66.75	43.02	109.77	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

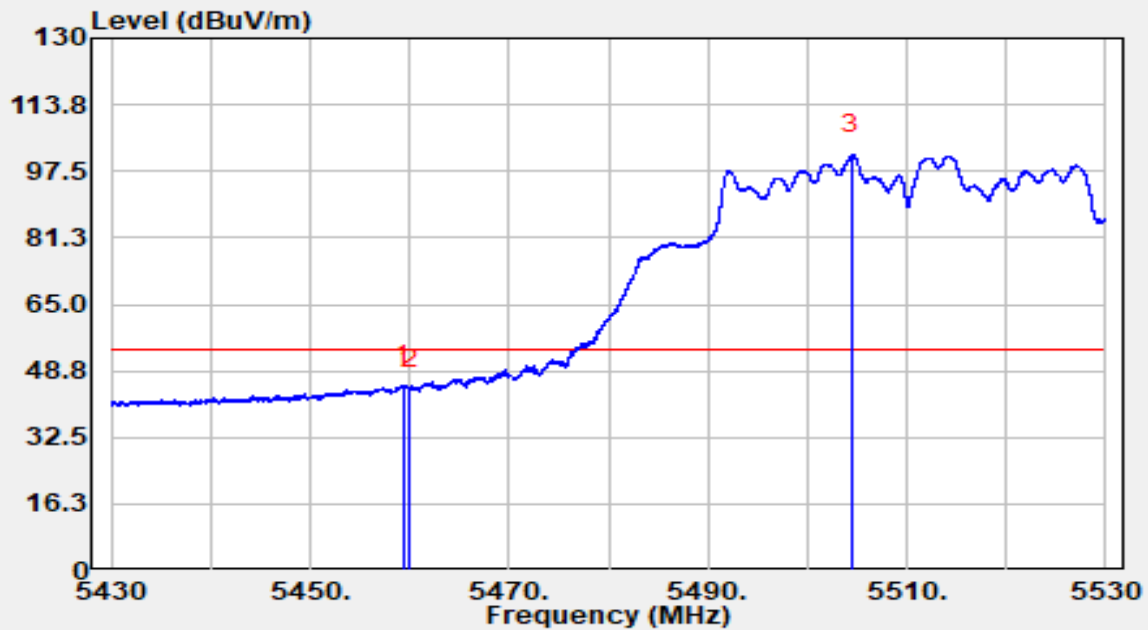


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.400	47.94	-2.63	45.30	-8.70	54.00	Average
2		5460.000	46.84	-2.55	44.29	-9.71	54.00	Average
3		5504.480	56.87	44.72	101.60	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

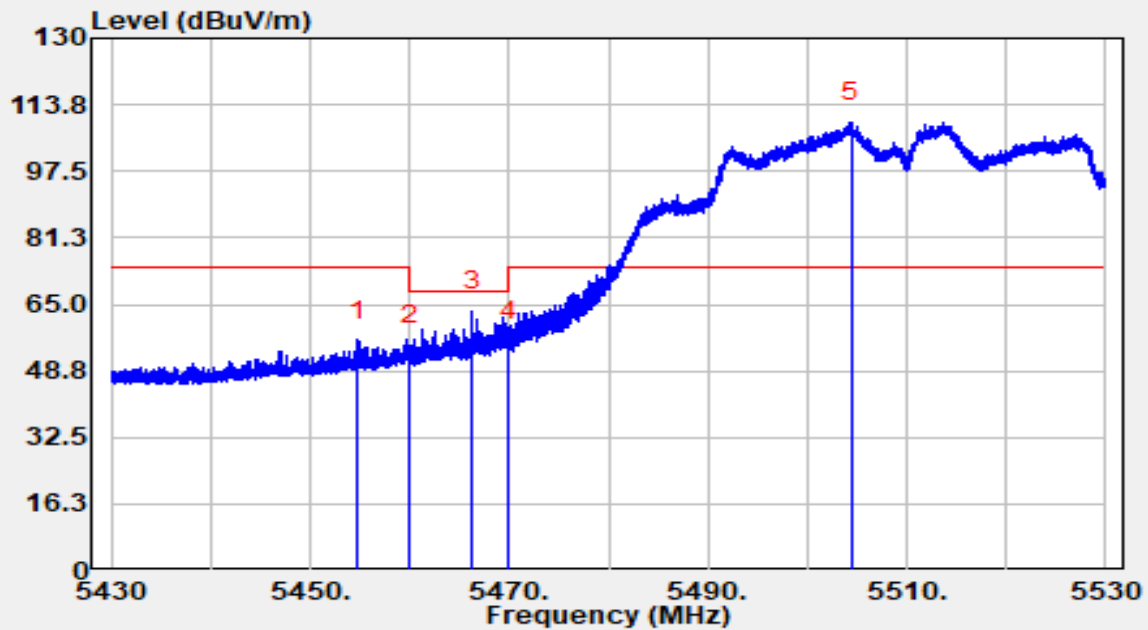


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.820	59.16	-2.94	56.23	-17.77	74.00	Peak
2		5460.000	57.51	-2.55	54.96	-13.24	68.20	Peak
3	*	5466.260	65.21	-1.83	63.38	-4.82	68.20	Peak
4		5470.000	56.90	-0.76	56.14	-12.06	68.20	Peak
5		5504.390	64.80	44.70	109.50	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

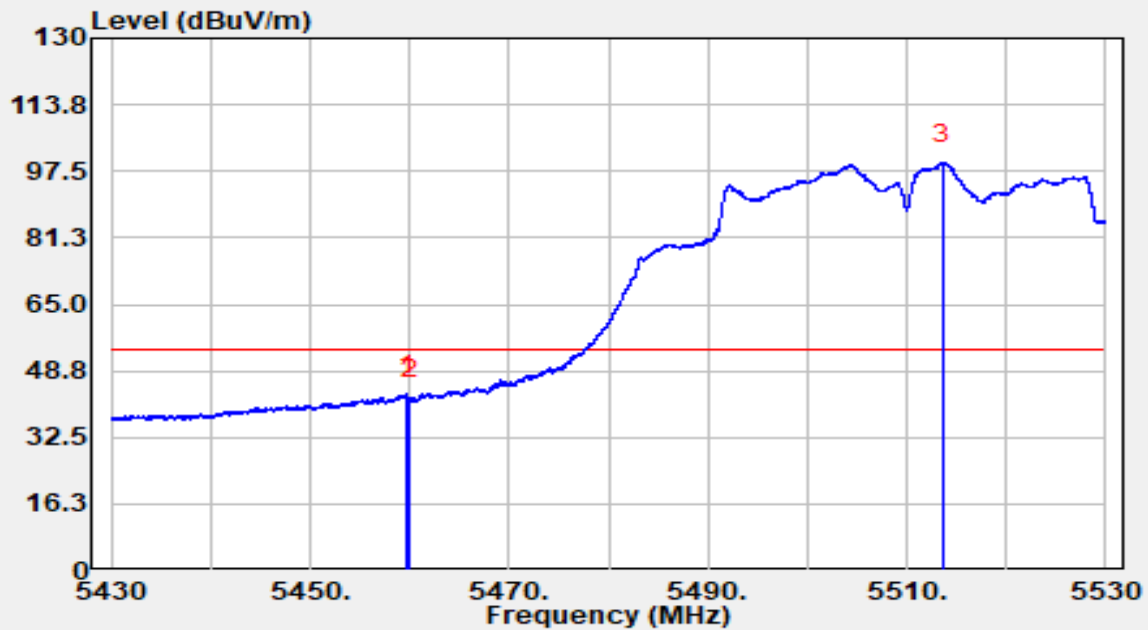


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.710	45.53	-2.59	42.94	-11.06	54.00	Average
2		5460.000	44.35	-2.55	41.80	-12.20	54.00	Average
3		5513.630	56.55	42.97	99.52	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

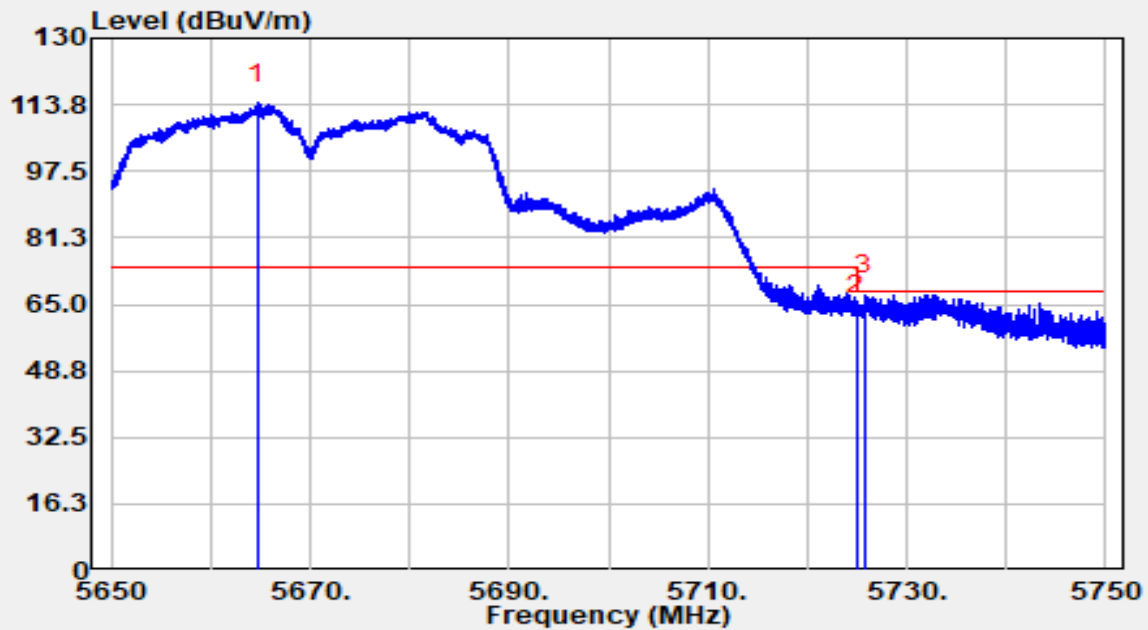


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5664.750	71.77	42.33	114.11	N/A	N/A	Peak
2		5725.000	63.43	-0.89	62.54	-5.66	68.20	Peak
3	*	5725.770	68.77	-1.32	67.45	-0.75	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

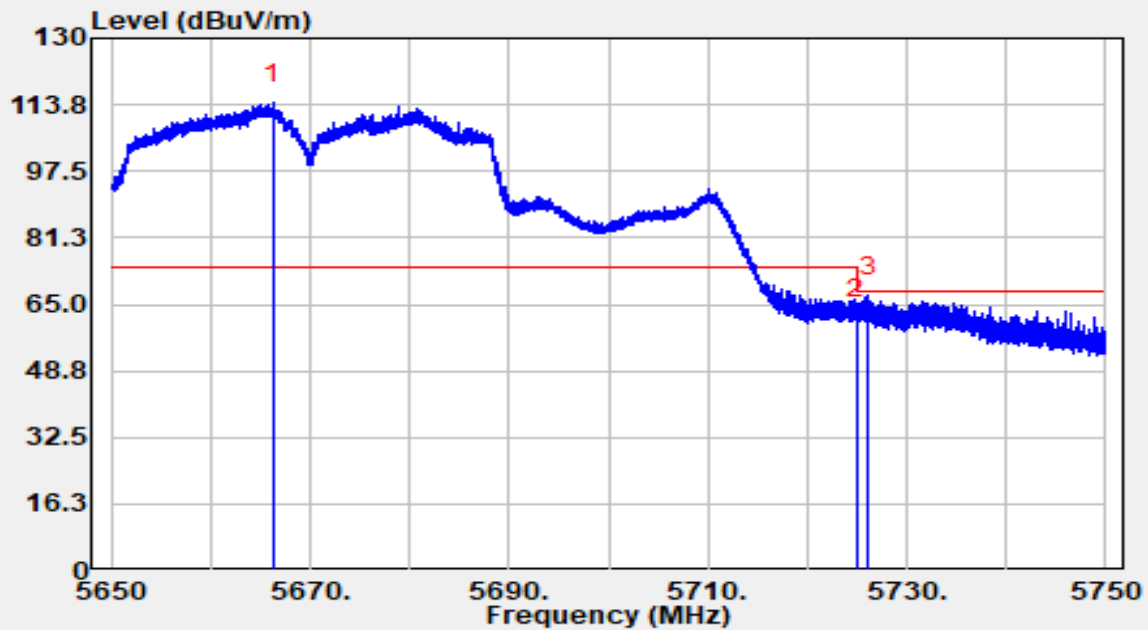


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5666.240	69.86	44.24	114.10	N/A	N/A	Peak
2		5725.000	62.68	-0.89	61.79	-6.41	68.20	Peak
3	*	5726.180	68.66	-1.51	67.15	-1.05	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

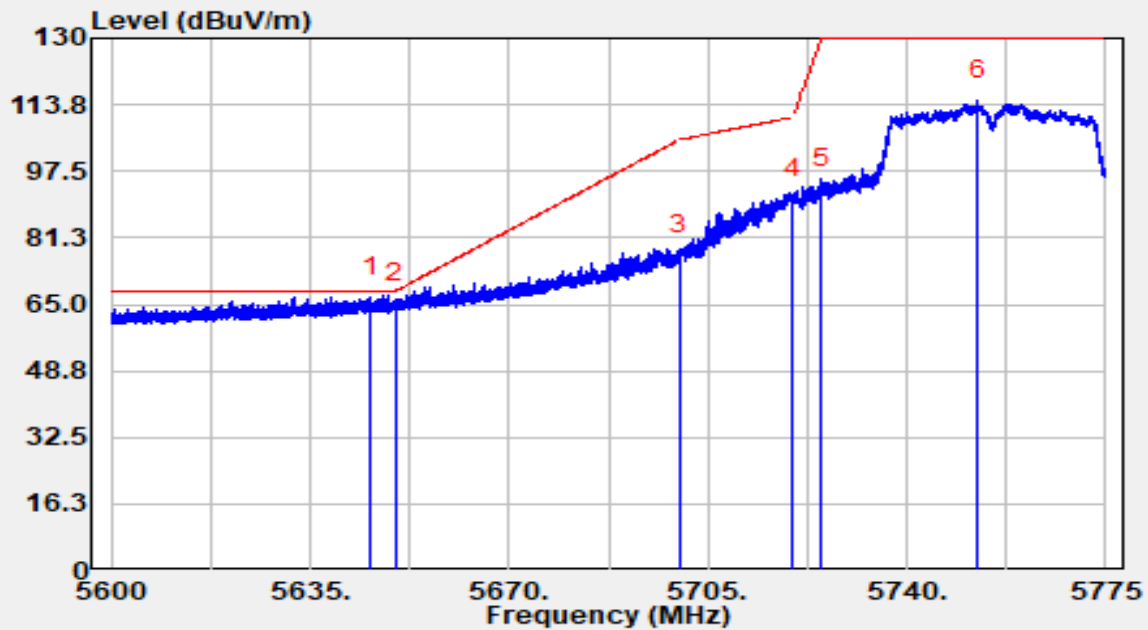


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5645.570	74.57	-7.68	66.89	-1.31	68.20	Peak
2		5650.000	73.13	-7.67	65.46	-2.74	68.20	Peak
3		5699.995	84.51	-7.49	77.02	-28.17	105.20	Peak
4		5720.000	98.25	-7.37	90.88	-19.92	110.80	Peak
5		5725.000	100.72	-7.36	93.37	-36.63	130.00	Peak
6		5752.495	122.45	-7.54	114.92	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

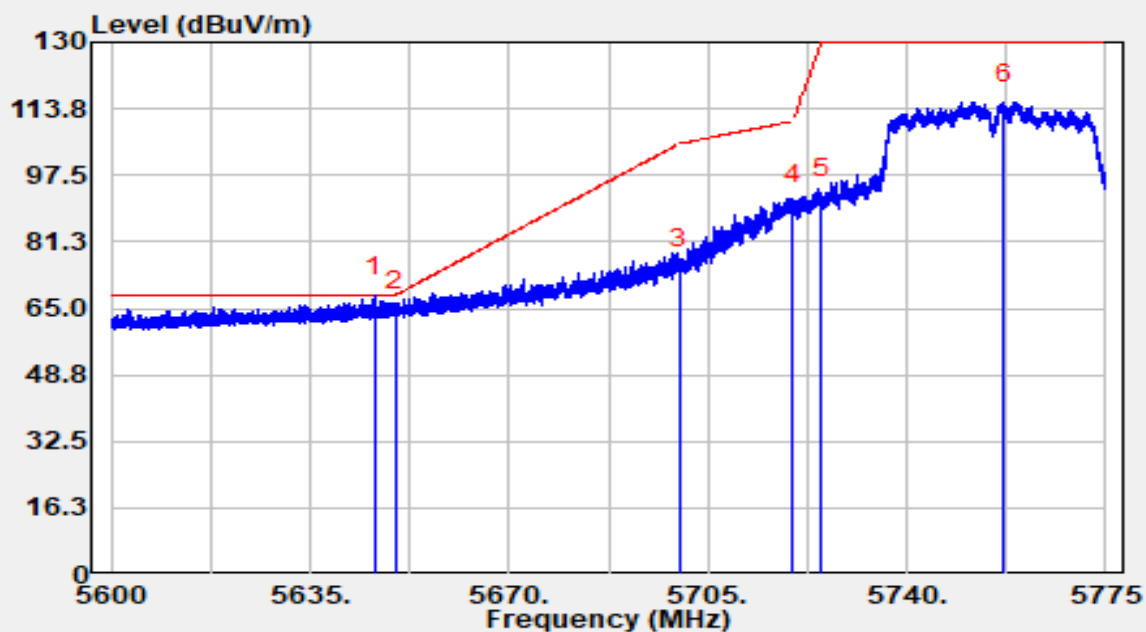


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5646.462	75.71	-7.68	68.03	-0.17	68.20	Peak
2		5650.000	72.28	-7.67	64.61	-3.59	68.20	Peak
3		5700.000	82.37	-7.49	74.88	-30.32	105.20	Peak
4		5720.000	97.96	-7.37	90.59	-20.21	110.80	Peak
5		5725.000	99.57	-7.36	92.21	-37.79	130.00	Peak
6		5757.045	122.79	-7.52	115.26	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

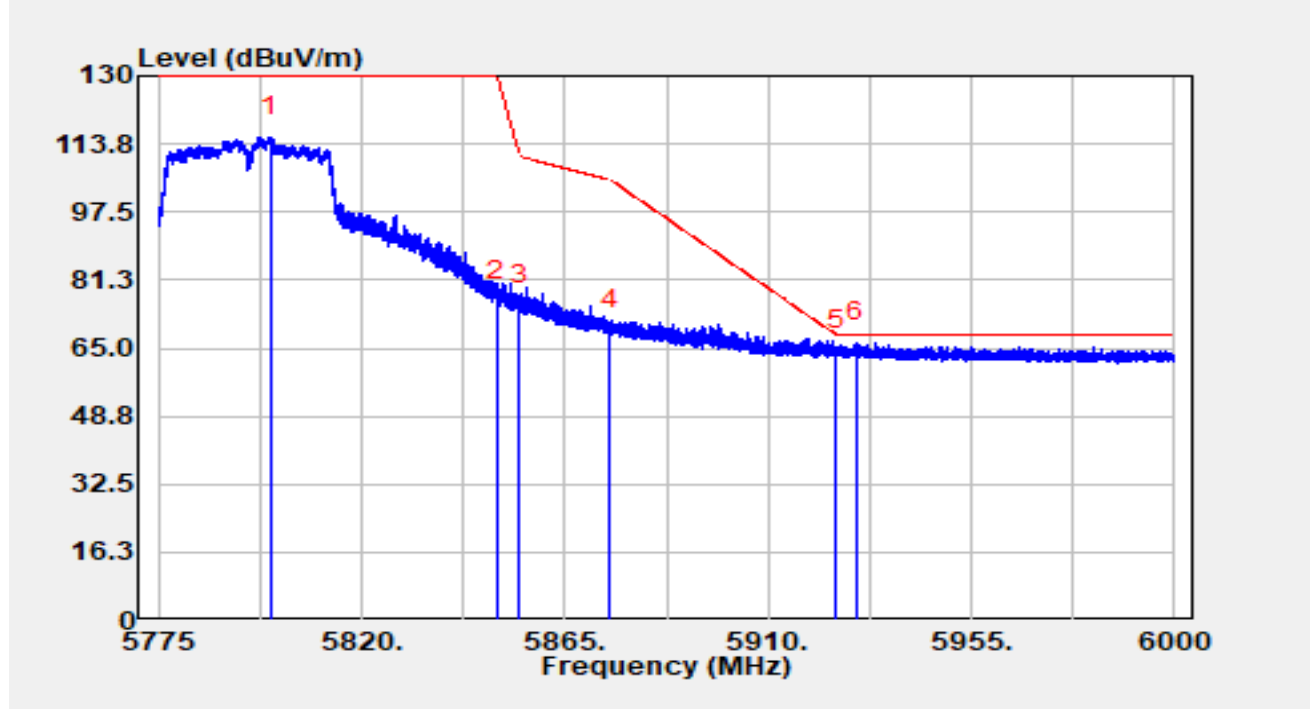


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5799.840	120.98	-5.68	115.30	N/A	N/A	Peak
2		5850.000	81.99	-5.64	76.36	-53.64	130.00	Peak
3		5855.000	80.76	-5.69	75.07	-35.73	110.80	Peak
4		5875.000	75.16	-5.74	69.42	-35.78	105.20	Peak
5		5925.000	69.90	-5.59	64.31	-3.89	68.20	Peak
6	*	5929.485	71.88	-5.54	66.34	-1.86	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

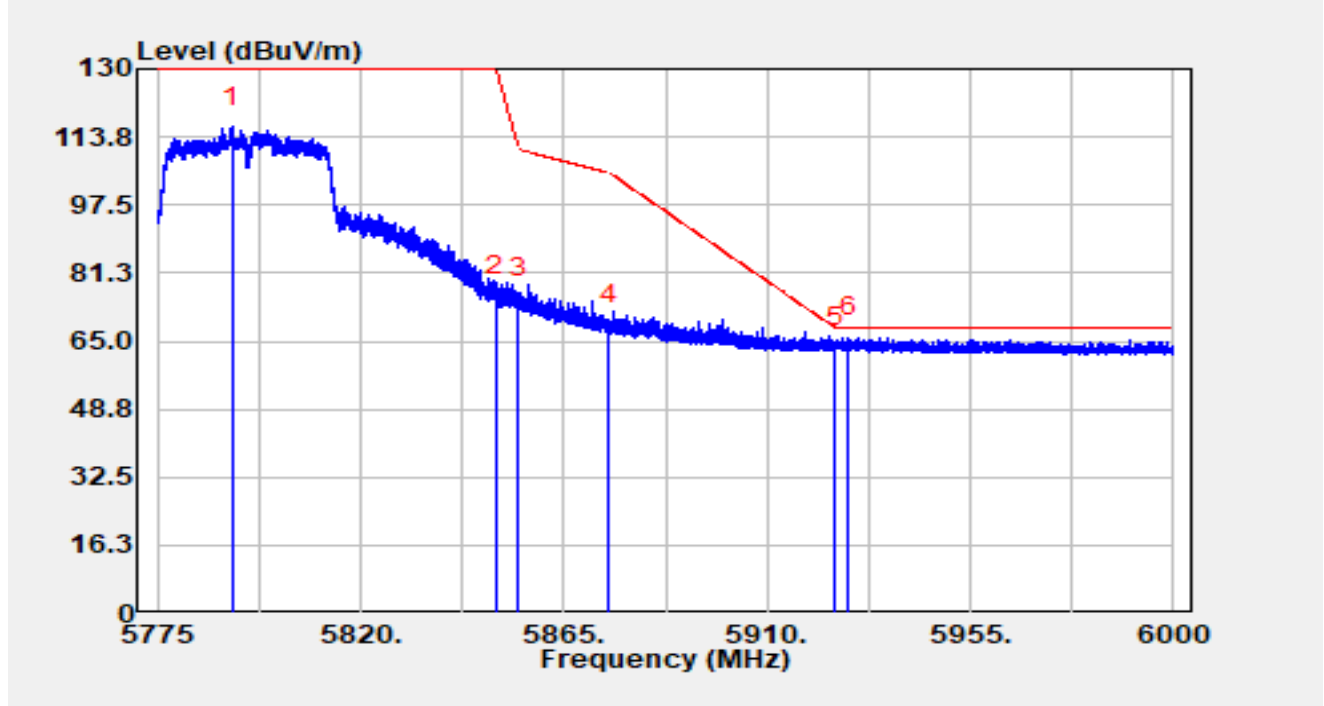


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5791.493	121.64	-5.60	116.04	N/A	N/A	Peak
2		5850.000	81.57	-5.64	75.94	-54.06	130.00	Peak
3		5855.000	81.10	-5.69	75.41	-35.39	110.80	Peak
4		5875.000	74.43	-5.74	68.69	-36.51	105.20	Peak
5		5925.000	69.35	-5.59	63.76	-4.44	68.20	Peak
6	*	5928.022	71.39	-5.56	65.83	-2.37	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

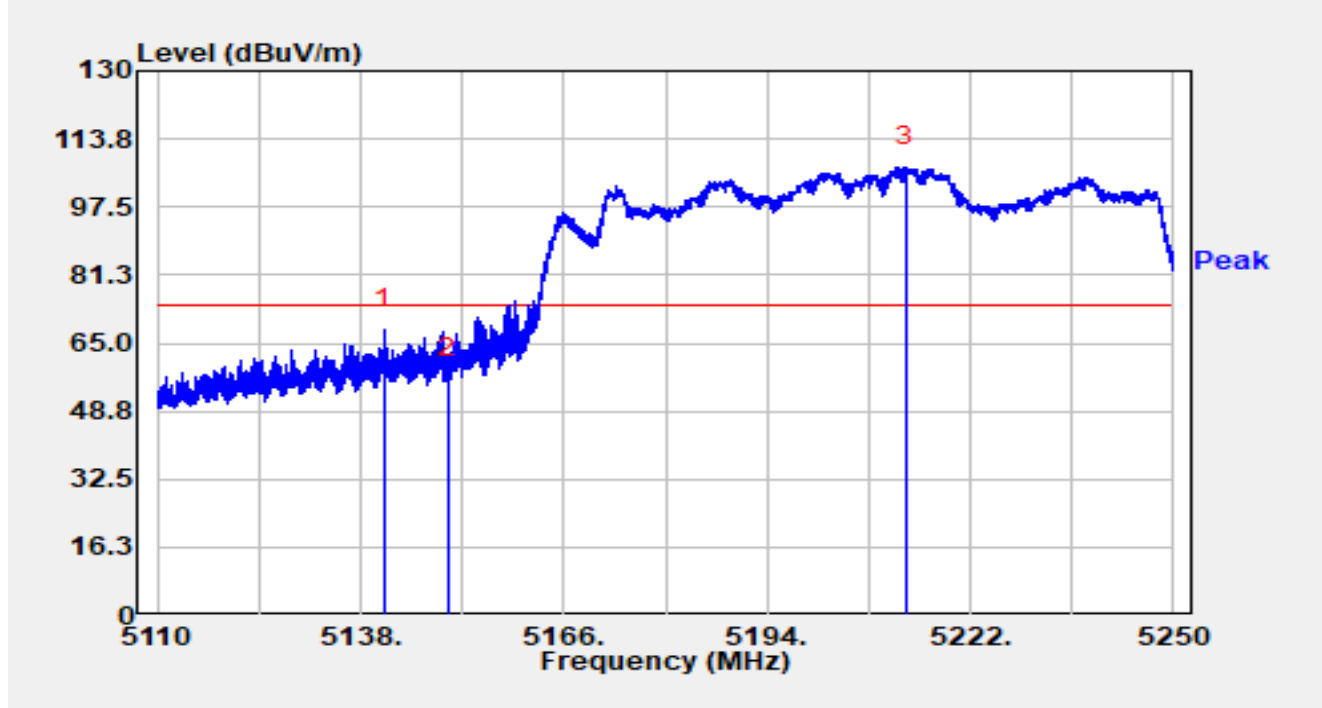


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5141.290	69.21	-0.94	68.27	-5.73	74.00	Peak
2		5150.000	56.70	0.18	56.87	-17.13	74.00	Peak
3		5213.012	67.51	39.65	107.16	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

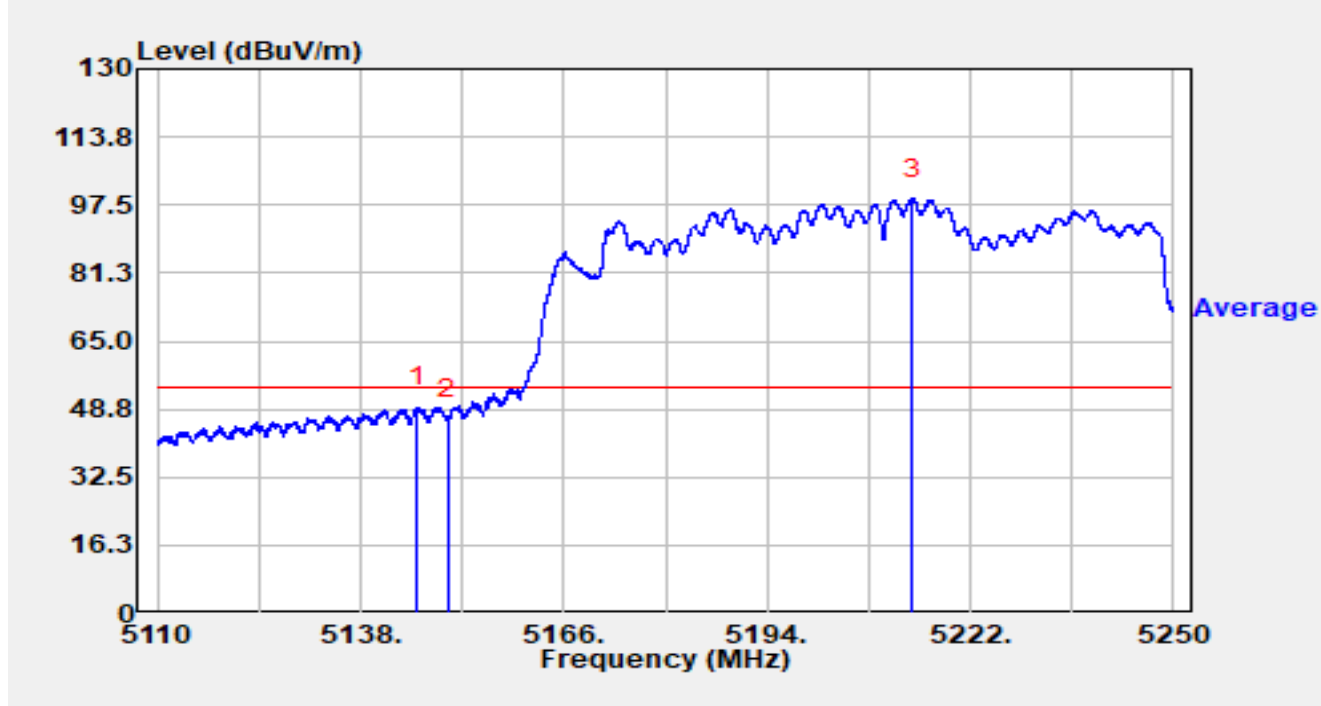


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.798	49.67	-0.56	49.11	-4.89	54.00	Average
2		5150.000	46.12	0.18	46.30	-7.70	54.00	Average
3		5214.048	58.91	40.15	99.06	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

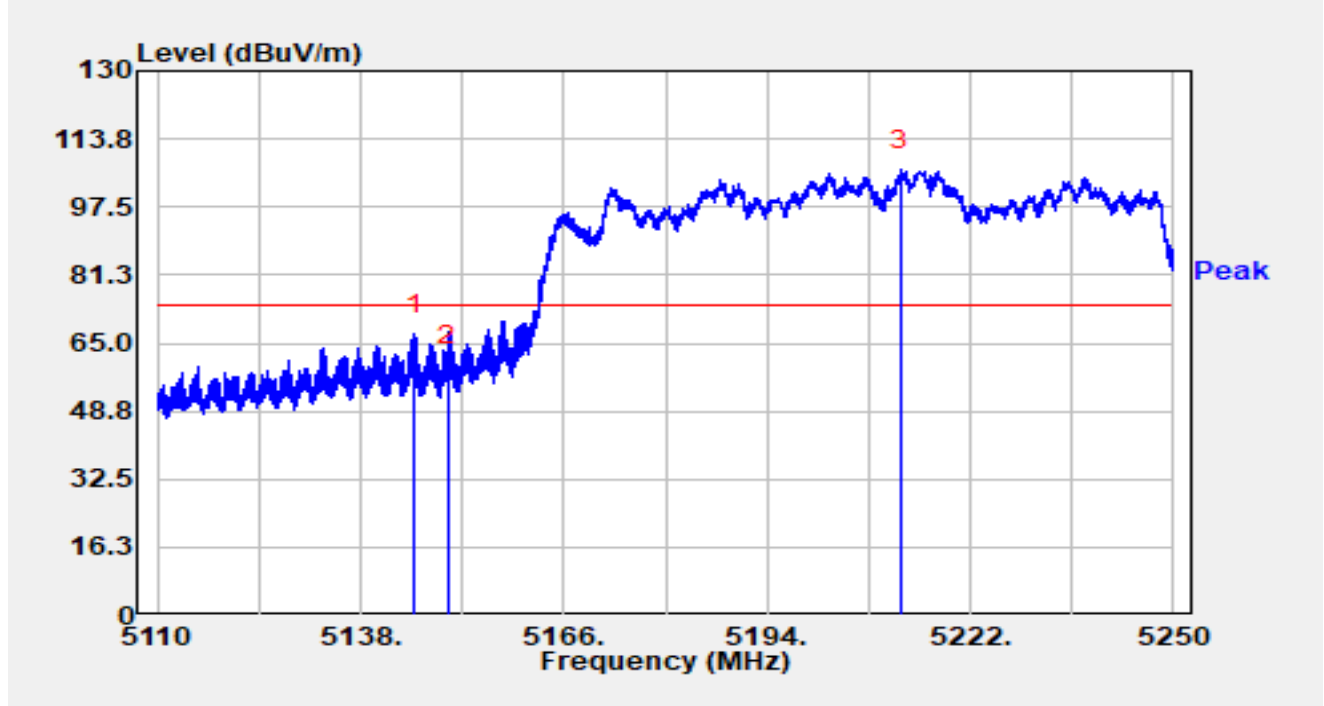


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.378	67.76	-0.62	67.14	-6.86	74.00	Peak
2		5150.000	59.42	0.18	59.60	-14.40	74.00	Peak
3		5212.368	66.87	39.48	106.35	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

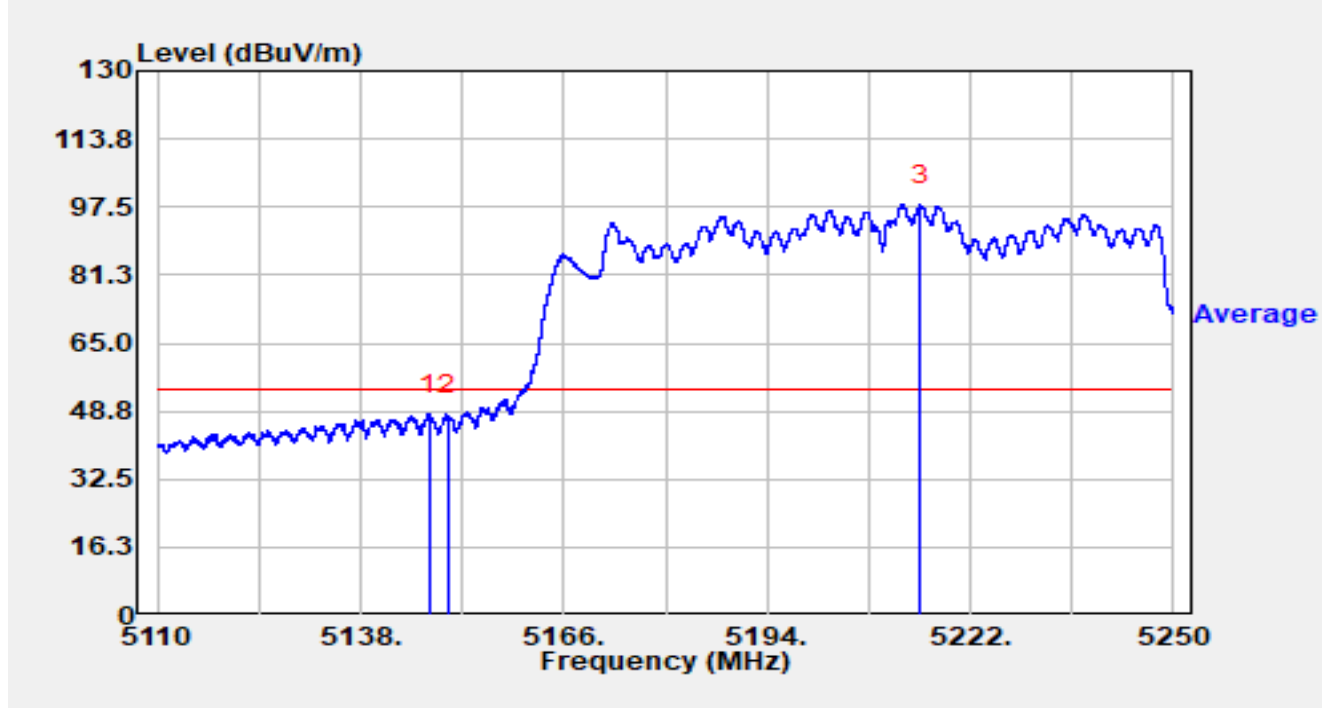


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.366	48.31	-0.26	48.05	-5.95	54.00	Average
2		5150.000	47.45	0.18	47.63	-6.37	54.00	Average
3		5215.056	57.14	40.87	98.00	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

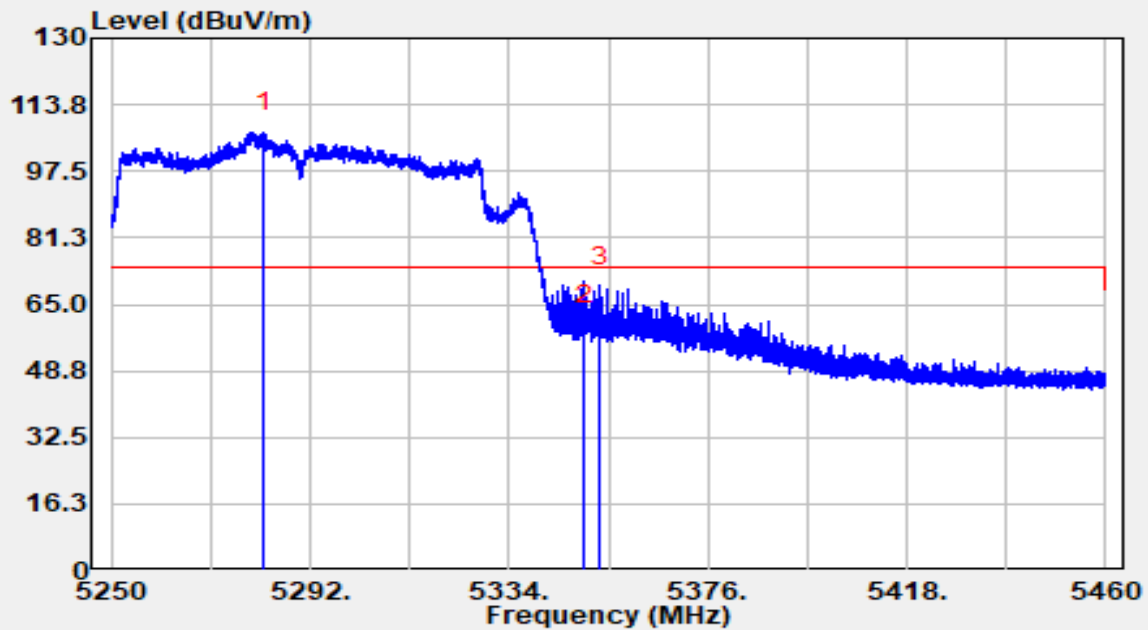


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5282.214	58.00	49.14	107.14	N/A	N/A	Peak
2		5350.000	60.32	-0.36	59.96	-14.04	74.00	Peak
3	*	5353.320	71.72	-2.13	69.59	-4.41	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

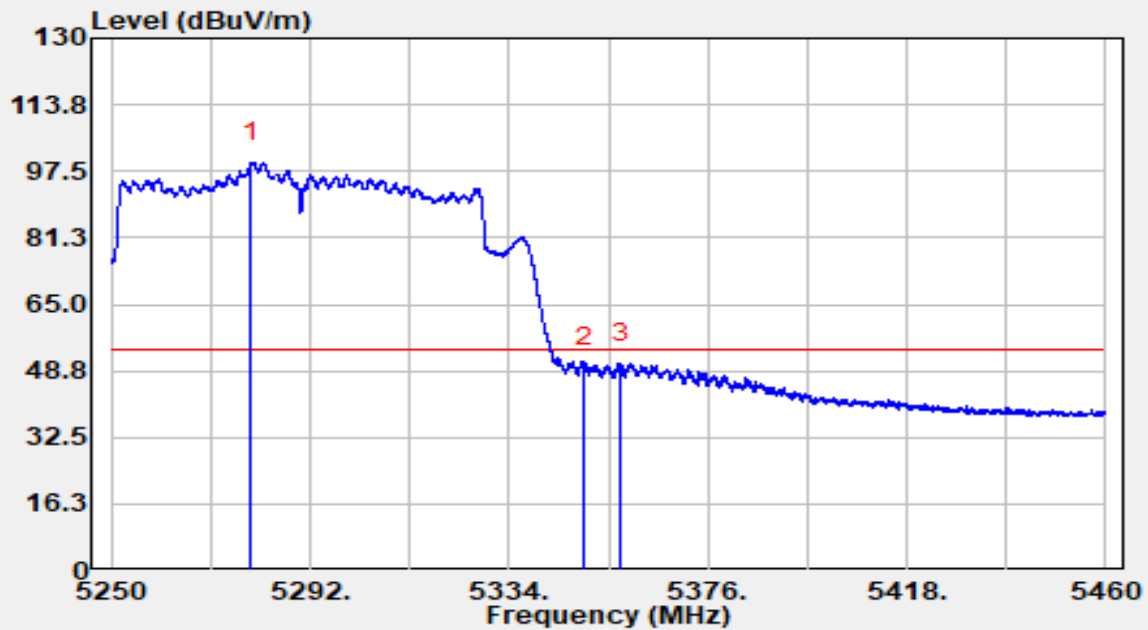


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5279.568	54.37	45.24	99.61	N/A	N/A	Average
2		5350.000	50.14	-0.36	49.78	-4.22	54.00	Average
3	*	5357.478	53.54	-2.85	50.70	-3.30	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

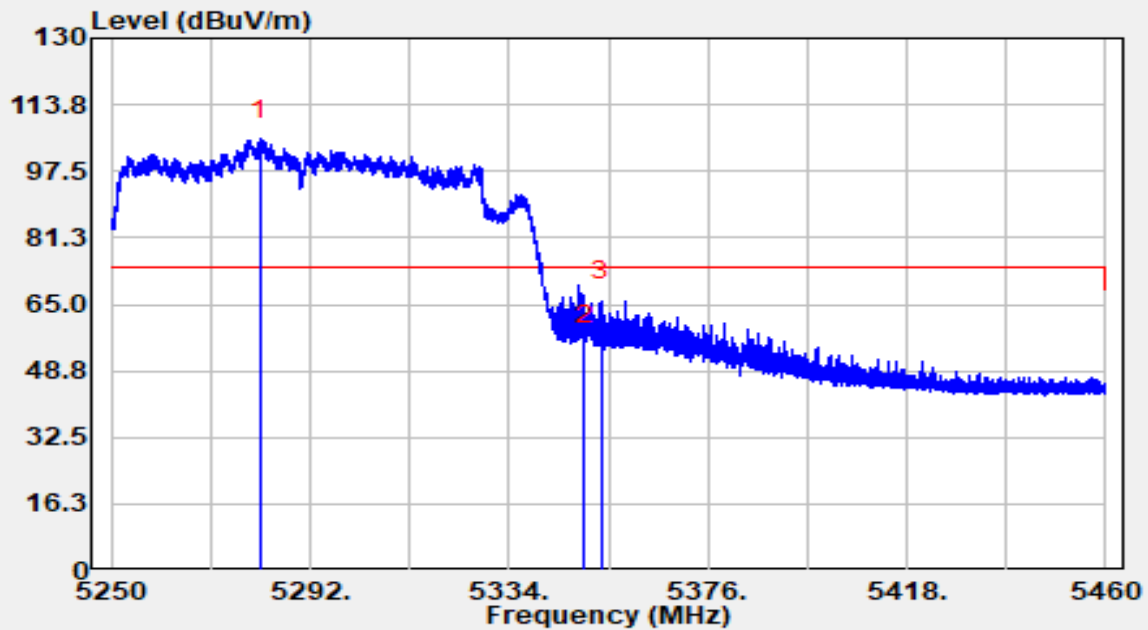


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5281.458	57.33	48.03	105.36	N/A	N/A	Peak
2		5350.000	55.78	-0.36	55.42	-18.58	74.00	Peak
3	*	5353.488	68.06	-2.14	65.92	-8.08	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

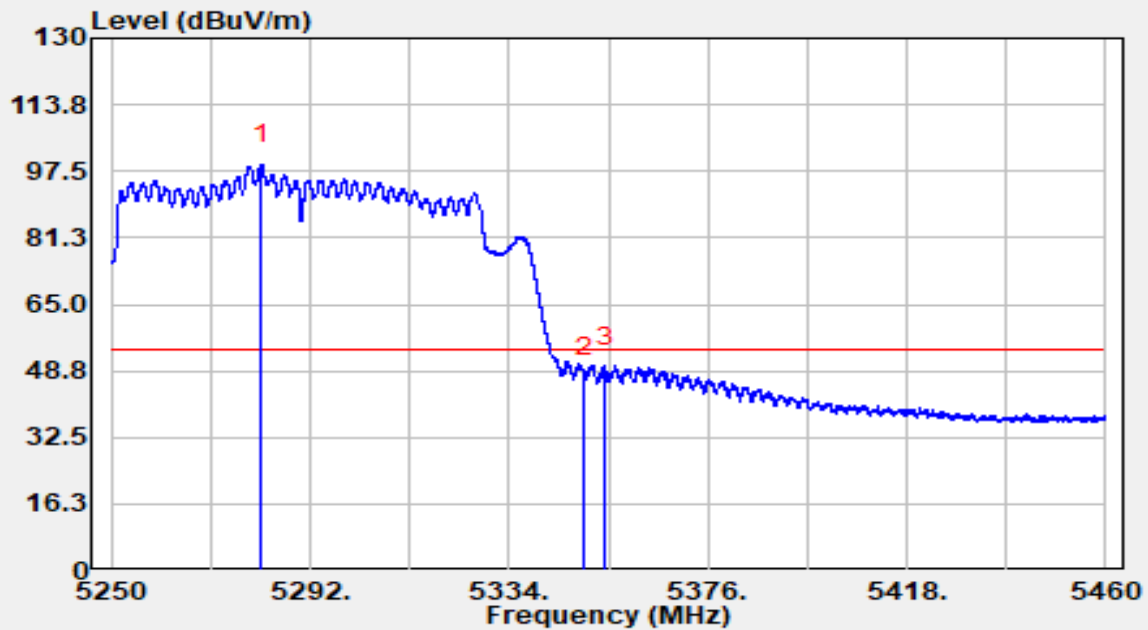


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5281.647	50.88	48.37	99.24	N/A	N/A	Average
2		5350.000	47.50	-0.36	47.14	-6.86	54.00	Average
3	*	5354.223	52.47	-2.44	50.02	-3.98	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

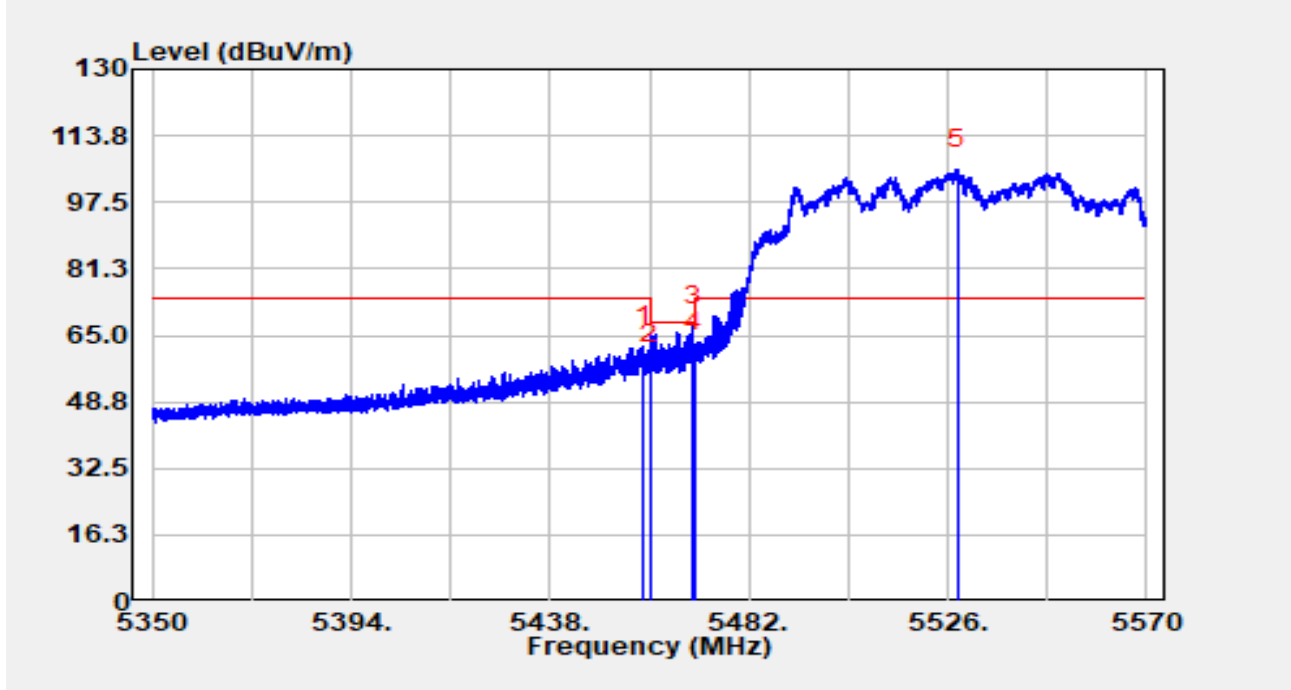


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.680	65.03	-2.68	62.35	-11.65	74.00	Peak
2		5460.000	60.88	-2.55	58.33	-9.87	68.20	Peak
3	*	5469.702	68.07	-0.86	67.21	-0.99	68.20	Peak
4		5470.000	62.07	-0.76	61.31	-6.89	68.20	Peak
5		5528.222	59.64	45.97	105.60	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

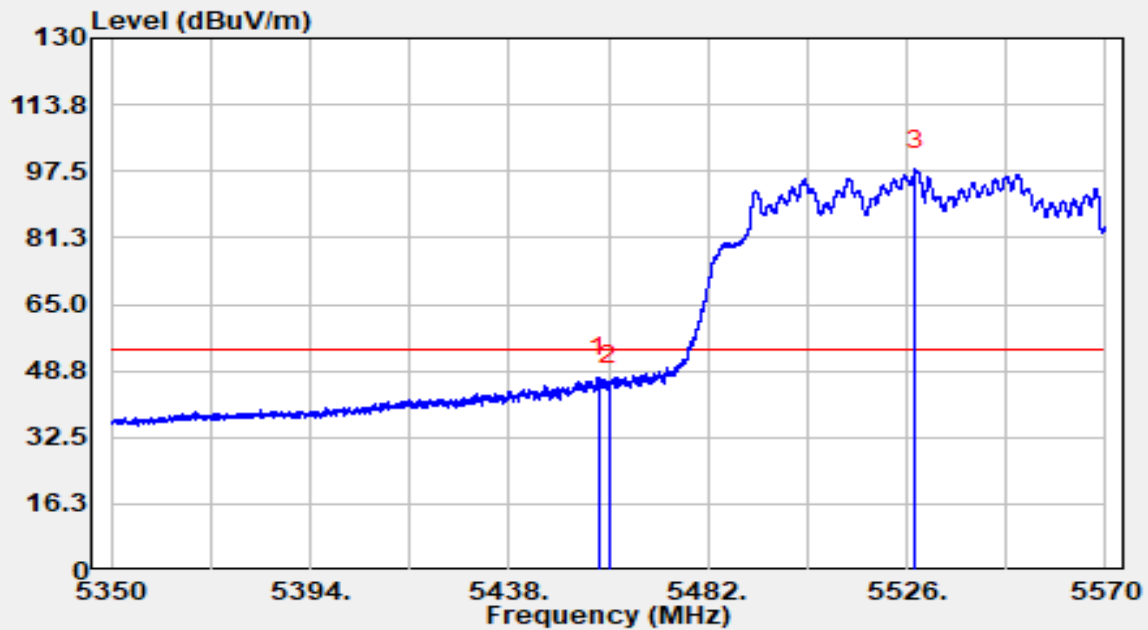


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.954	49.93	-2.73	47.20	-6.80	54.00	Average
2		5460.000	48.16	-2.55	45.61	-8.39	54.00	Average
3		5527.980	52.35	45.52	97.88	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

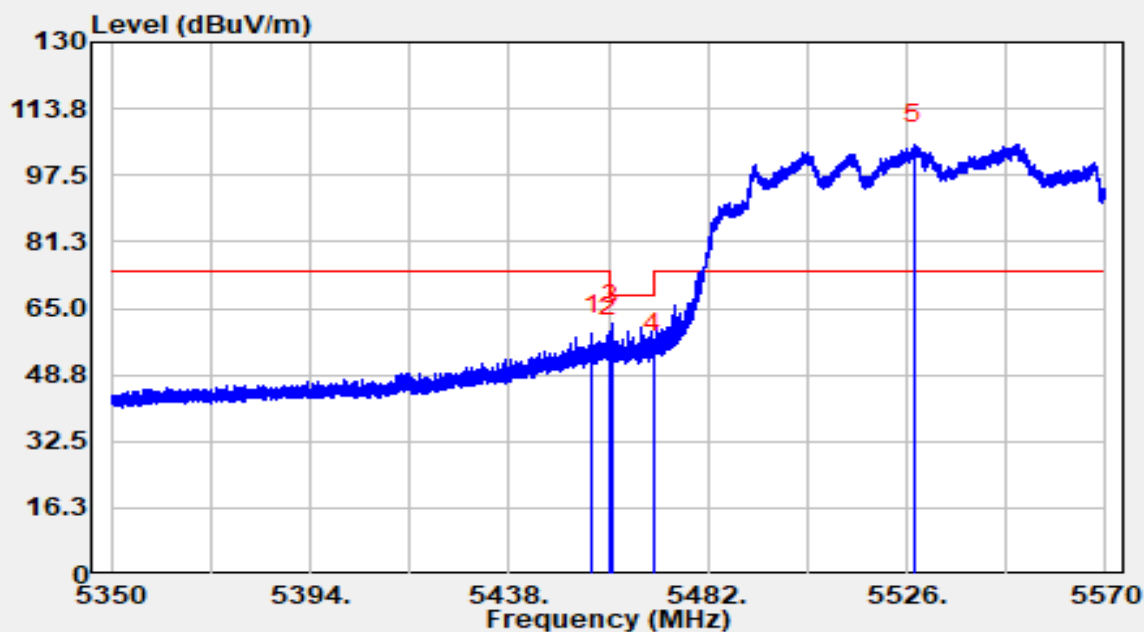


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.480	61.67	-2.88	58.79	-15.21	74.00	Peak
2		5460.000	60.52	-2.55	57.96	-10.24	68.20	Peak
3	*	5460.594	63.76	-2.57	61.19	-7.01	68.20	Peak
4		5470.000	54.96	-0.76	54.20	-14.00	68.20	Peak
5		5527.474	60.77	44.45	105.22	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

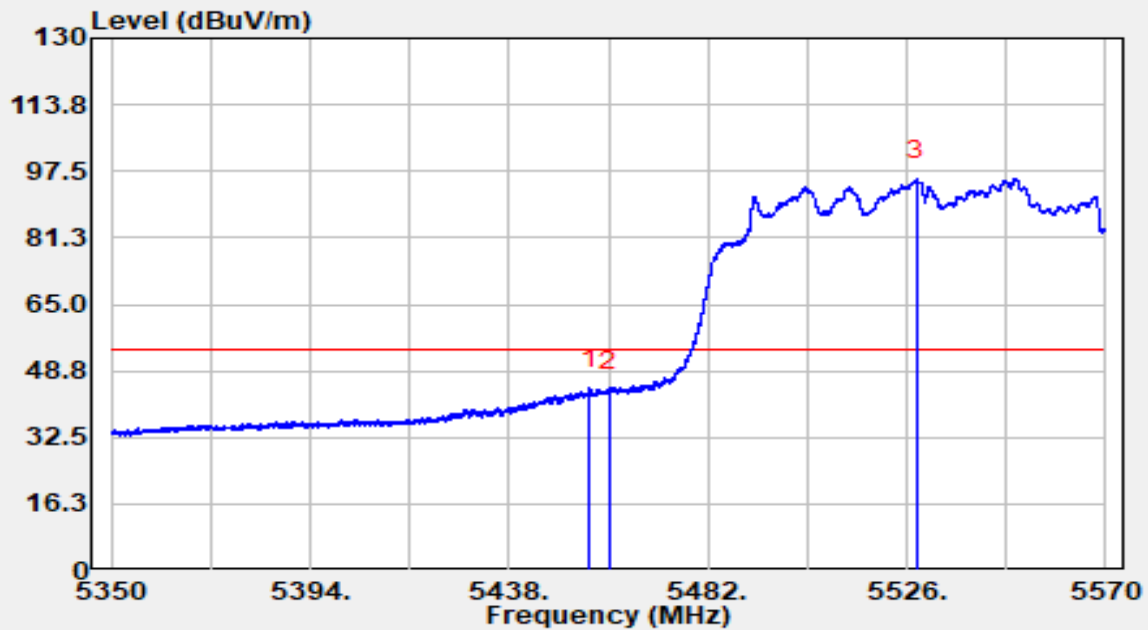


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5455.930	47.43	-2.88	44.55	-9.45	54.00	Average
2		5460.000	46.46	-2.55	43.90	-10.10	54.00	Average
3		5528.222	49.45	45.97	95.42	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

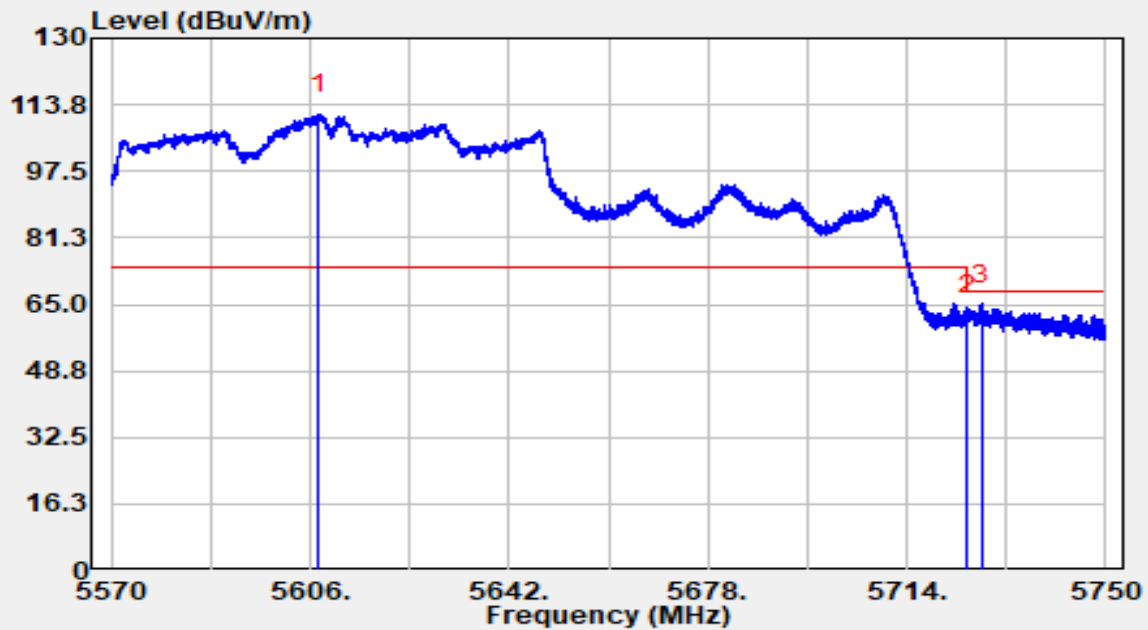


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5607.476	68.50	42.95	111.45	N/A	N/A	Peak
2		5725.000	63.65	-0.89	62.76	-5.44	68.20	Peak
3	*	5727.464	67.07	-2.00	65.07	-3.13	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

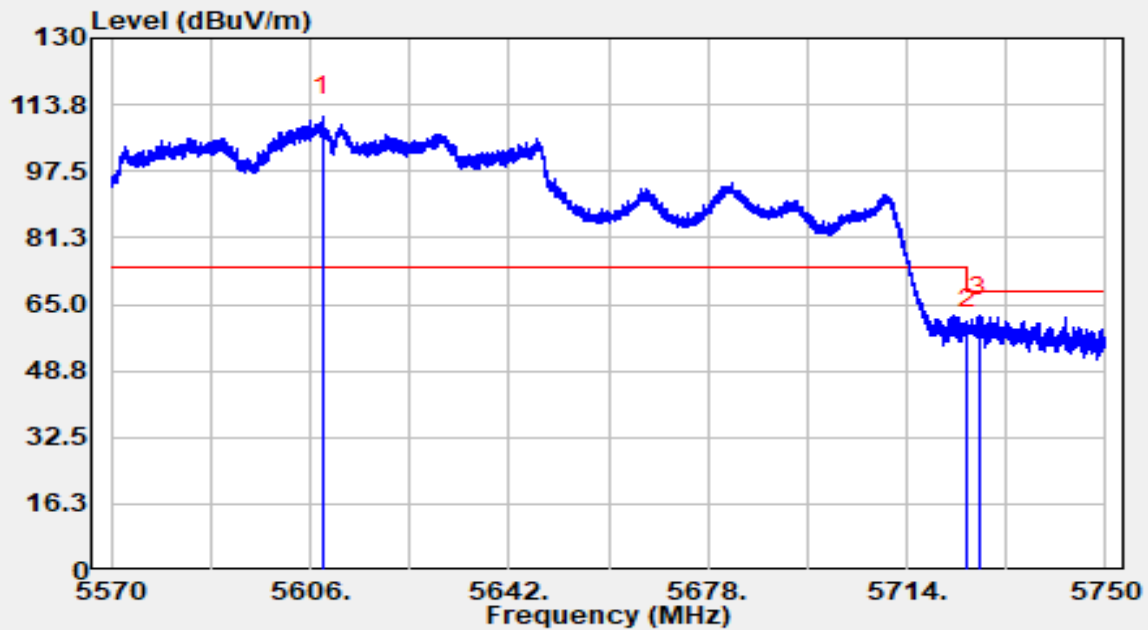


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5608.286	67.03	43.96	111.00	N/A	N/A	Peak
2		5725.000	59.77	-0.89	58.87	-9.33	68.20	Peak
3	*	5727.194	64.00	-1.95	62.06	-6.14	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC Part15E_5.8G Band4	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

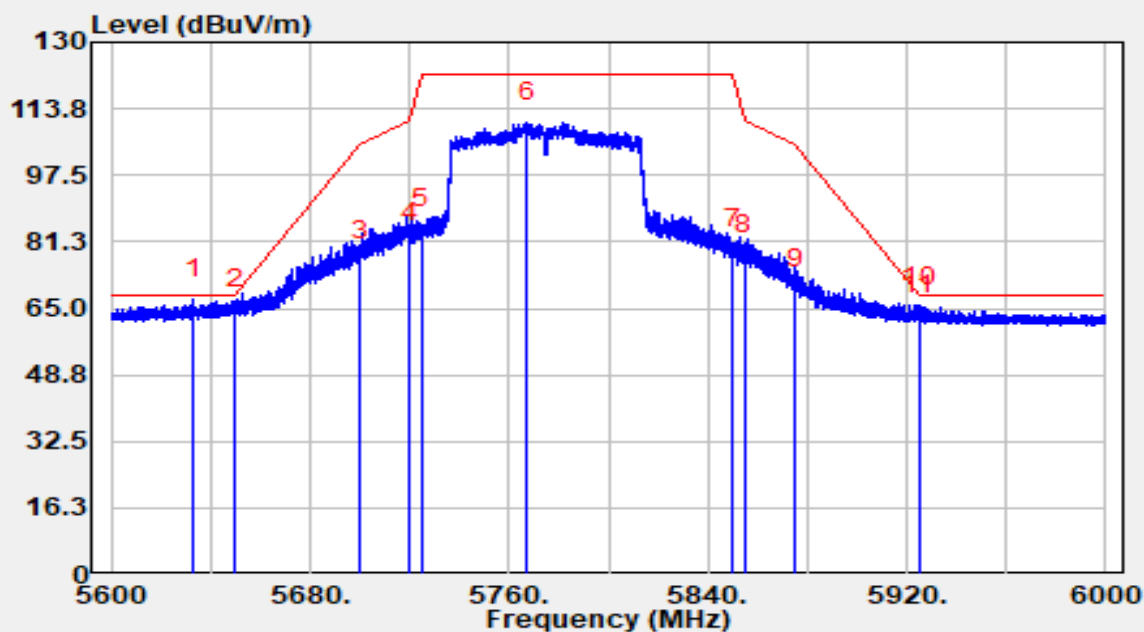

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5632.960	72.56	-5.31	67.25	-0.95	68.20	Peak
2		5650.000	70.48	-5.42	65.05	-3.15	68.20	Peak
3		5700.000	82.32	-5.43	76.90	-28.30	105.20	Peak
4		5720.000	86.70	-5.37	81.33	-29.47	110.80	Peak
5		5725.000	90.03	-5.37	84.67	-37.53	122.20	Peak
6		5767.240	116.11	-5.60	110.50	N/A	N/A	Peak
7		5850.000	85.25	-5.64	79.62	-42.58	122.20	Peak
8		5855.000	83.97	-5.69	78.28	-32.52	110.80	Peak
9		5875.000	75.46	-5.74	69.72	-35.48	105.20	Peak
10		5924.960	71.11	-5.59	65.52	-2.71	68.23	Peak
11		5925.000	69.07	-5.59	63.48	-4.72	68.20	Peak


Notes:

1. " *" indicates the worst-case emission level observed during the measurement.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC Part15E_5.8G Band4	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

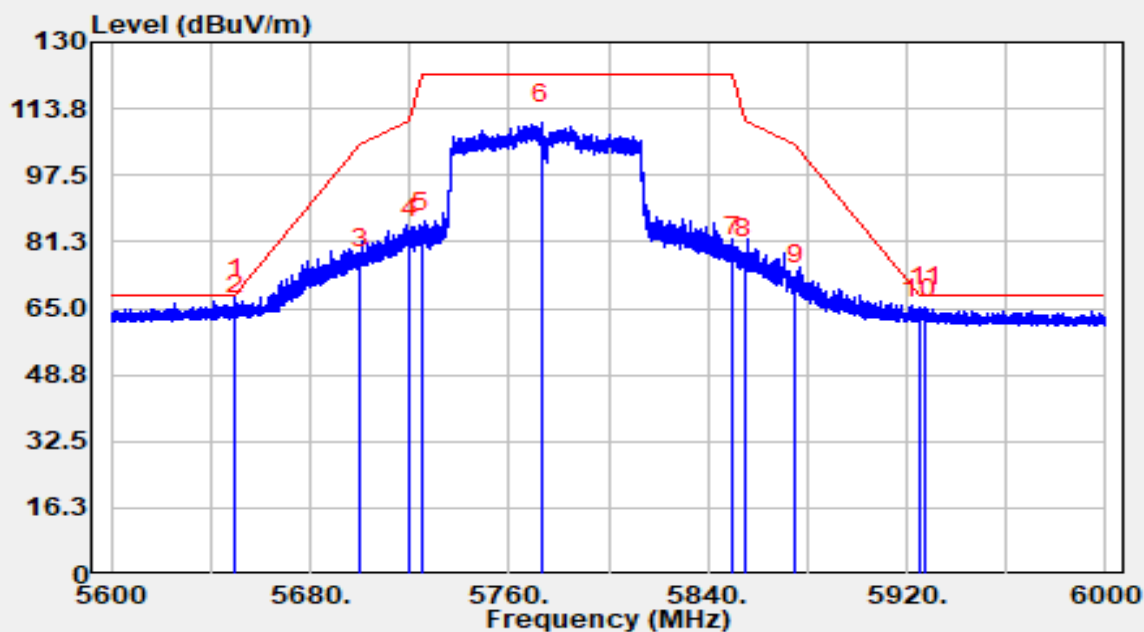

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5649.840	72.93	-5.42	67.51	-0.69	68.20	Peak
2		5650.000	68.78	-5.42	63.36	-4.84	68.20	Peak
3		5700.000	80.43	-5.43	75.01	-30.19	105.20	Peak
4		5720.000	87.44	-5.37	82.07	-28.73	110.80	Peak
5		5725.000	89.21	-5.37	83.84	-38.36	122.20	Peak
6		5773.040	115.82	-5.60	110.21	N/A	N/A	Peak
7		5850.000	83.60	-5.64	77.97	-44.23	122.20	Peak
8		5855.000	82.81	-5.69	77.12	-33.68	110.80	Peak
9		5875.000	76.69	-5.74	70.95	-34.25	105.20	Peak
10		5925.000	68.02	-5.59	62.43	-5.77	68.20	Peak
11		5927.320	70.99	-5.56	65.43	-2.77	68.20	Peak


Notes:

1. " *" indicates the worst-case emission level observed during the measurement.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

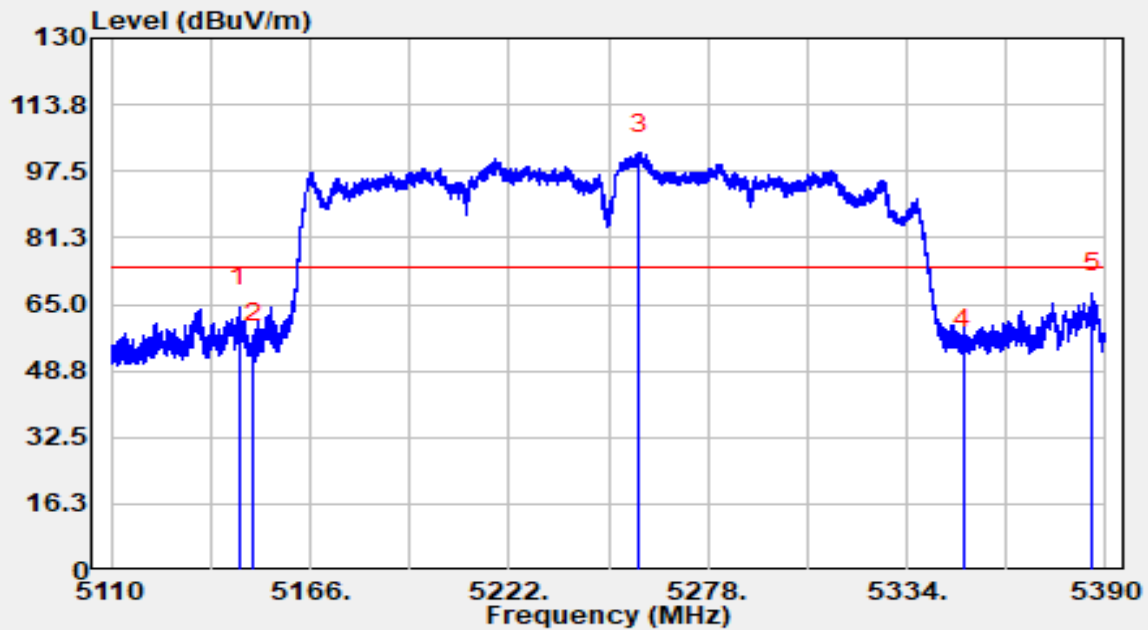


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5146.148	67.20	-2.89	64.31	-9.69	74.00	Peak
2		5150.000	57.78	-2.21	55.57	-18.43	74.00	Peak
3		5258.456	56.98	44.87	101.85	N/A	N/A	Peak
4		5350.000	55.75	-1.38	54.37	-19.63	74.00	Peak
5	*	5386.108	71.93	-4.20	67.72	-6.28	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

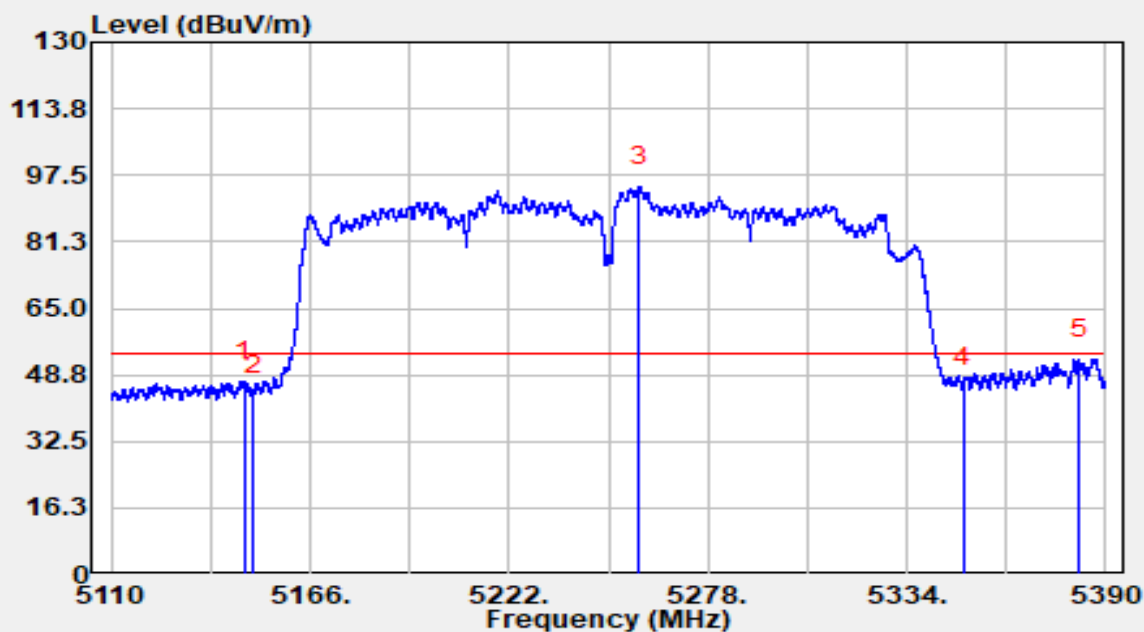


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.464	50.00	-2.72	47.29	-6.71	54.00	Average
2		5150.000	46.11	-2.21	43.90	-10.10	54.00	Average
3		5258.652	49.56	45.21	94.77	N/A	N/A	Average
4		5350.000	47.26	-1.38	45.89	-8.11	54.00	Average
5	*	5382.552	56.89	-4.20	52.69	-1.31	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

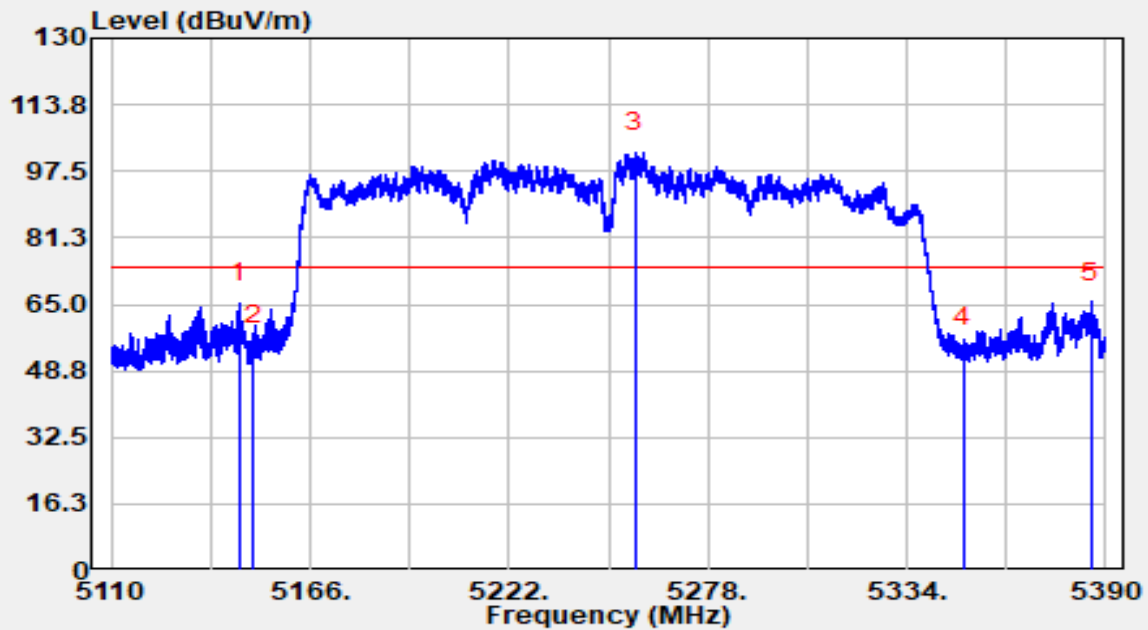


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5146.008	68.32	-2.91	65.41	-8.59	74.00	Peak
2		5150.000	57.64	-2.21	55.43	-18.57	74.00	Peak
3		5257.532	58.89	43.25	102.14	N/A	N/A	Peak
4		5350.000	56.19	-1.38	54.81	-19.19	74.00	Peak
5	*	5386.052	69.87	-4.20	65.67	-8.33	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

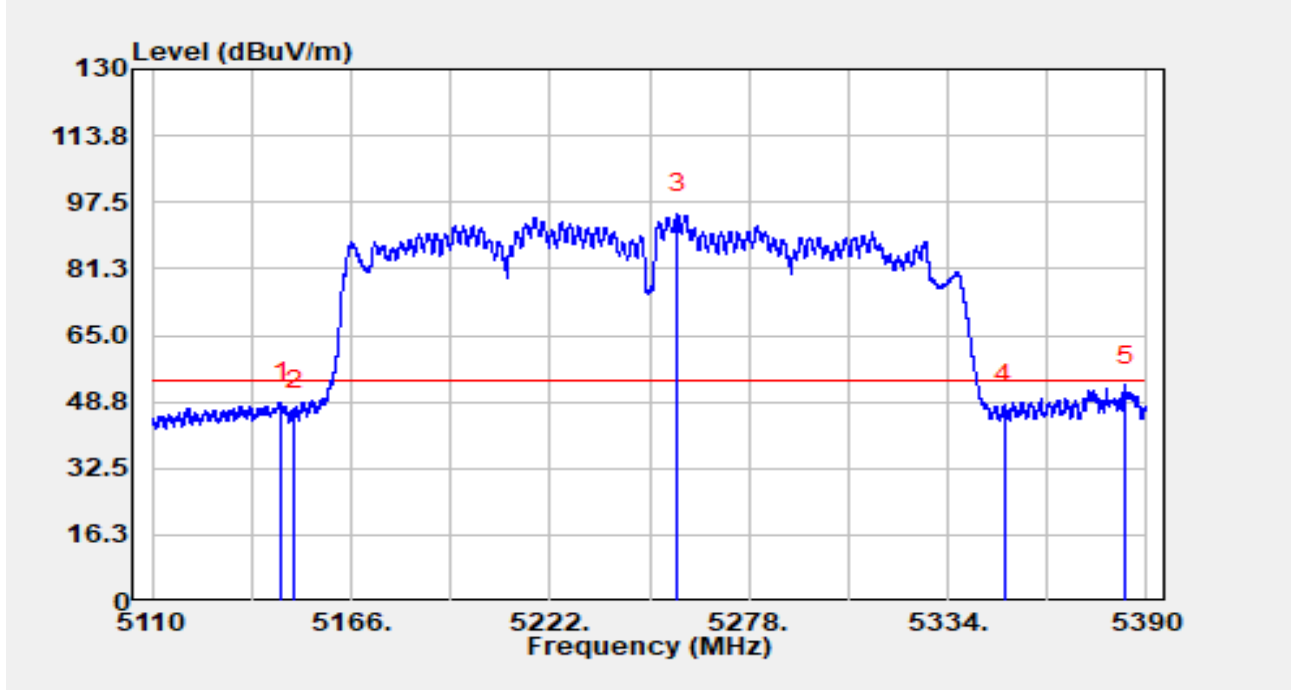


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5146.260	51.55	-2.88	48.67	-5.33	54.00	Average
2		5150.000	48.93	-2.21	46.72	-7.28	54.00	Average
3		5257.840	51.03	43.81	94.84	N/A	N/A	Average
4		5350.000	49.51	-1.38	48.13	-5.87	54.00	Average
5	*	5383.896	56.98	-4.19	52.78	-1.22	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

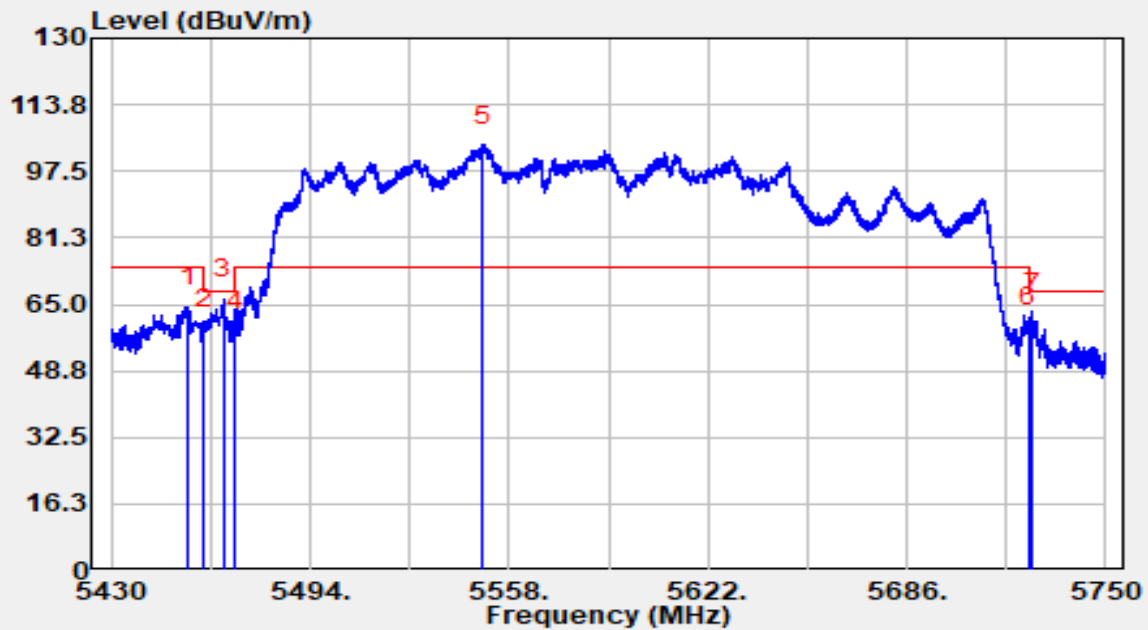


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.928	67.32	-2.93	64.39	-9.61	74.00	Peak
2		5460.000	61.75	-2.55	59.20	-9.00	68.20	Peak
3	*	5466.128	68.27	-1.85	66.41	-1.79	68.20	Peak
4		5470.000	59.36	-0.76	58.60	-9.60	68.20	Peak
5		5549.488	58.99	45.00	104.00	N/A	N/A	Peak
6		5725.000	60.46	-0.89	59.56	-8.64	68.20	Peak
7		5726.288	64.63	-1.55	63.08	-5.12	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

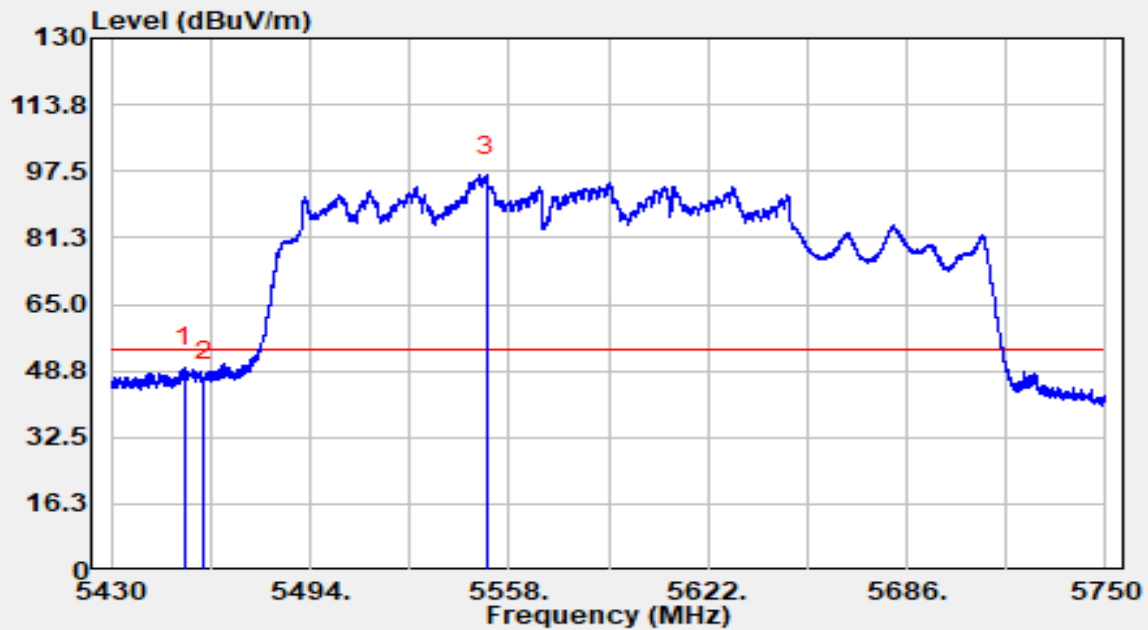


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5453.680	52.72	-3.00	49.73	-4.27	54.00	Average
2		5460.000	48.92	-2.55	46.36	-7.64	54.00	Average
3		5550.704	50.04	46.58	96.62	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

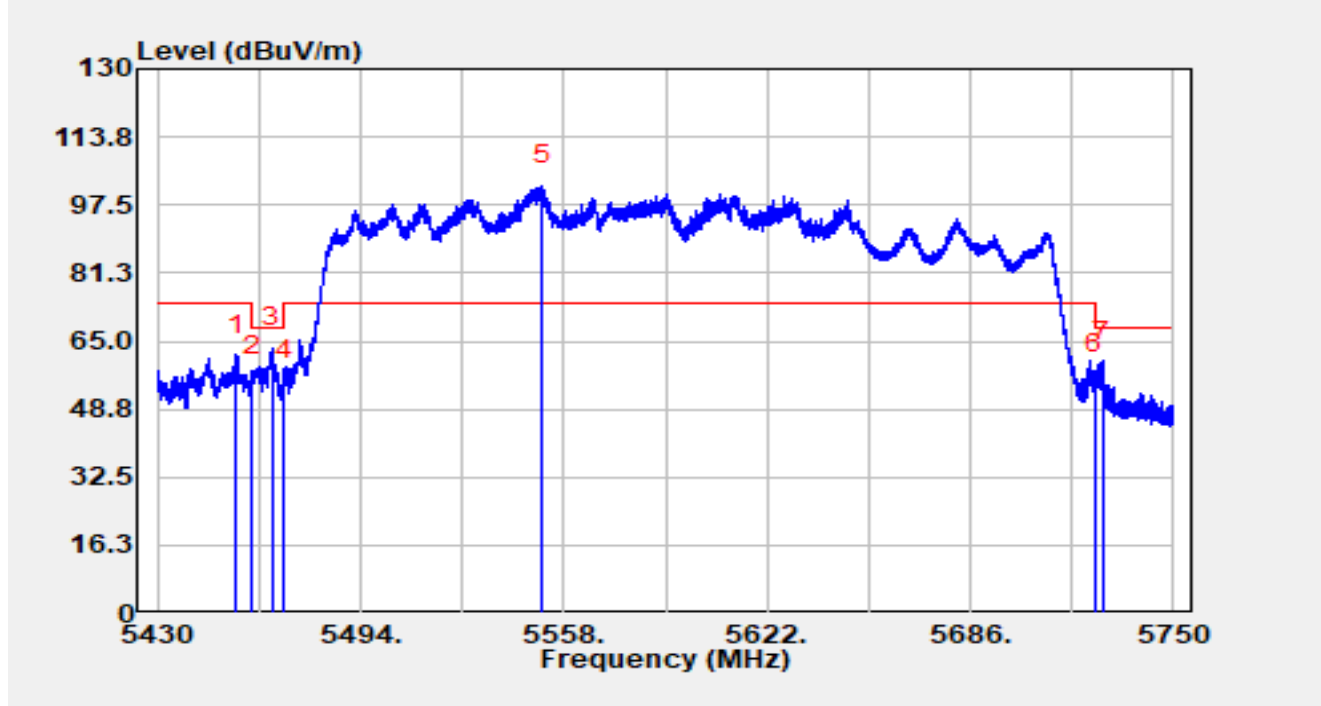


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.928	64.59	-2.93	61.66	-12.34	74.00	Peak
2		5460.000	59.31	-2.55	56.76	-11.44	68.20	Peak
3	*	5466.160	65.14	-1.85	63.29	-4.91	68.20	Peak
4		5470.000	56.58	-0.76	55.83	-12.37	68.20	Peak
5		5551.280	55.37	46.79	102.16	N/A	N/A	Peak
6		5725.000	58.09	-0.89	57.20	-11.00	68.20	Peak
7		5727.632	62.35	-2.04	60.30	-7.90	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

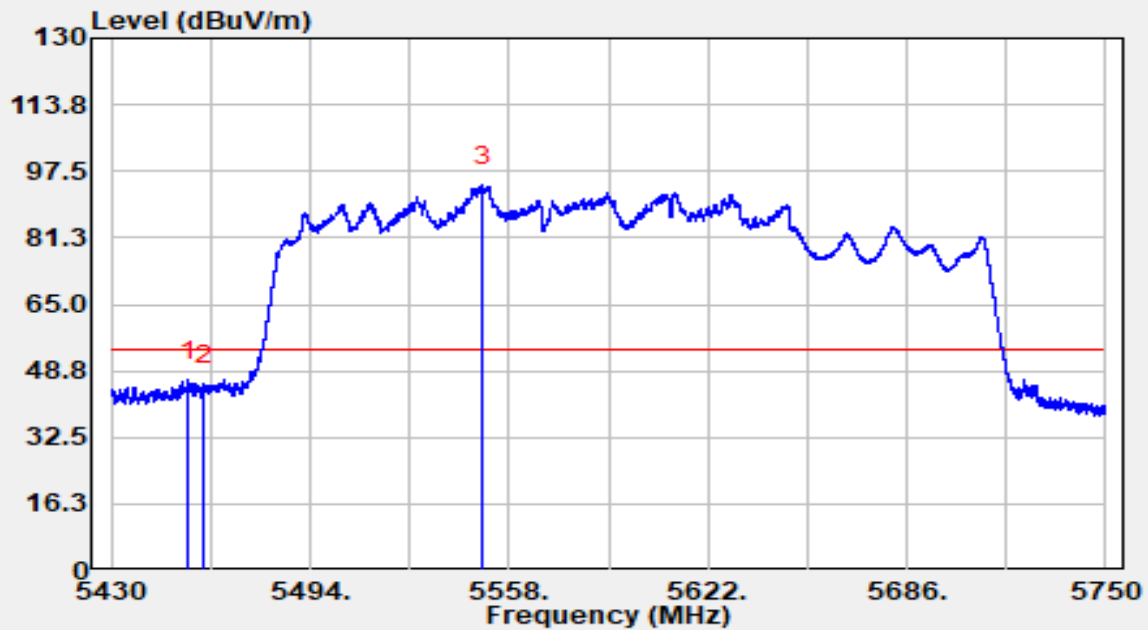


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.736	49.37	-2.94	46.43	-7.57	54.00	Average
2		5460.000	48.15	-2.55	45.60	-8.40	54.00	Average
3		5549.680	48.77	45.30	94.07	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

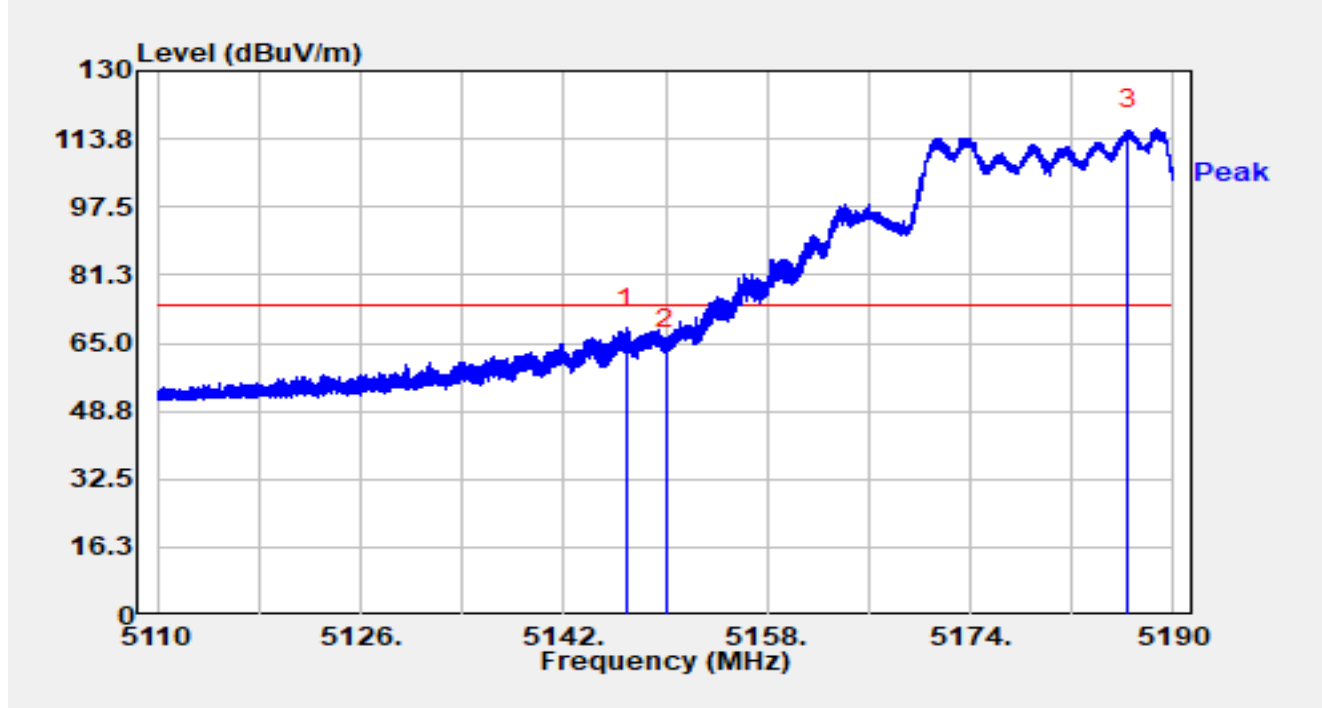


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.872	68.89	-0.34	68.55	-5.45	74.00	Peak
2		5150.000	63.24	0.18	63.42	-10.58	74.00	Peak
3		5186.400	77.38	38.63	116.01	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

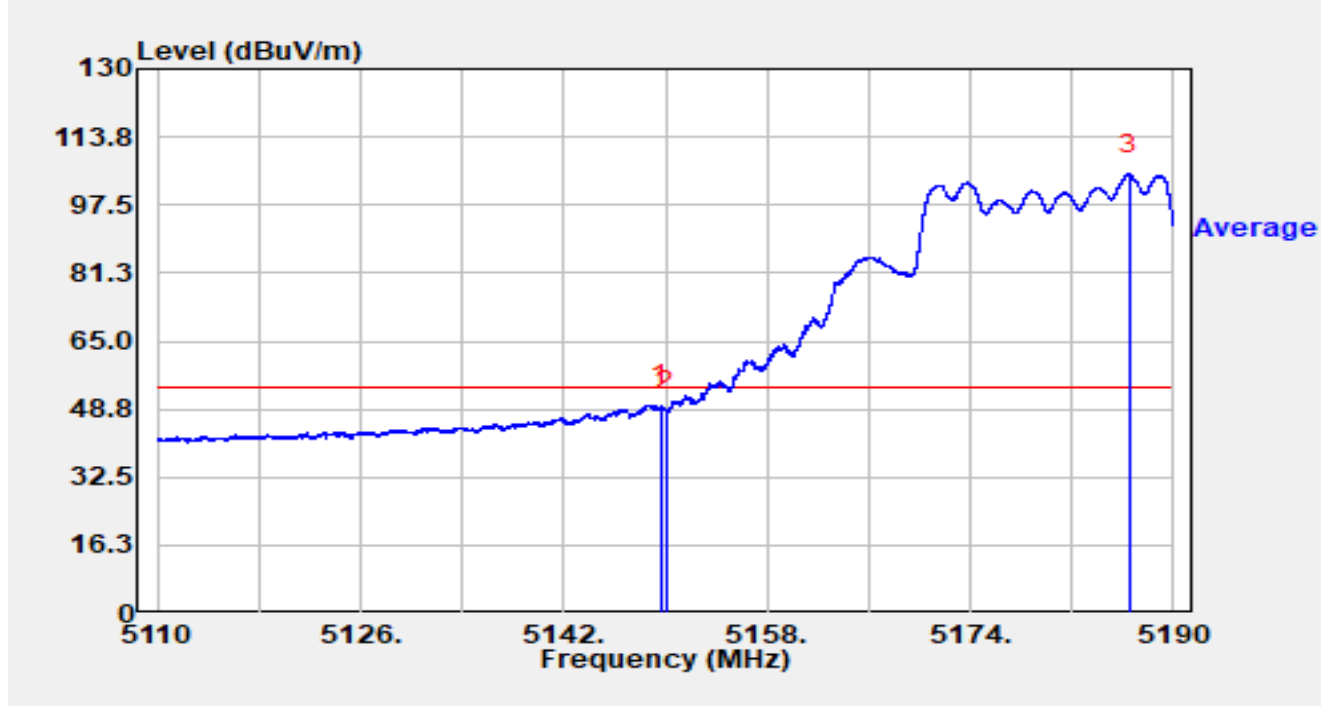


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.648	49.63	0.11	49.75	-4.25	54.00	Average
2		5150.000	48.33	0.18	48.51	-5.49	54.00	Average
3		5186.496	66.22	38.70	104.92	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

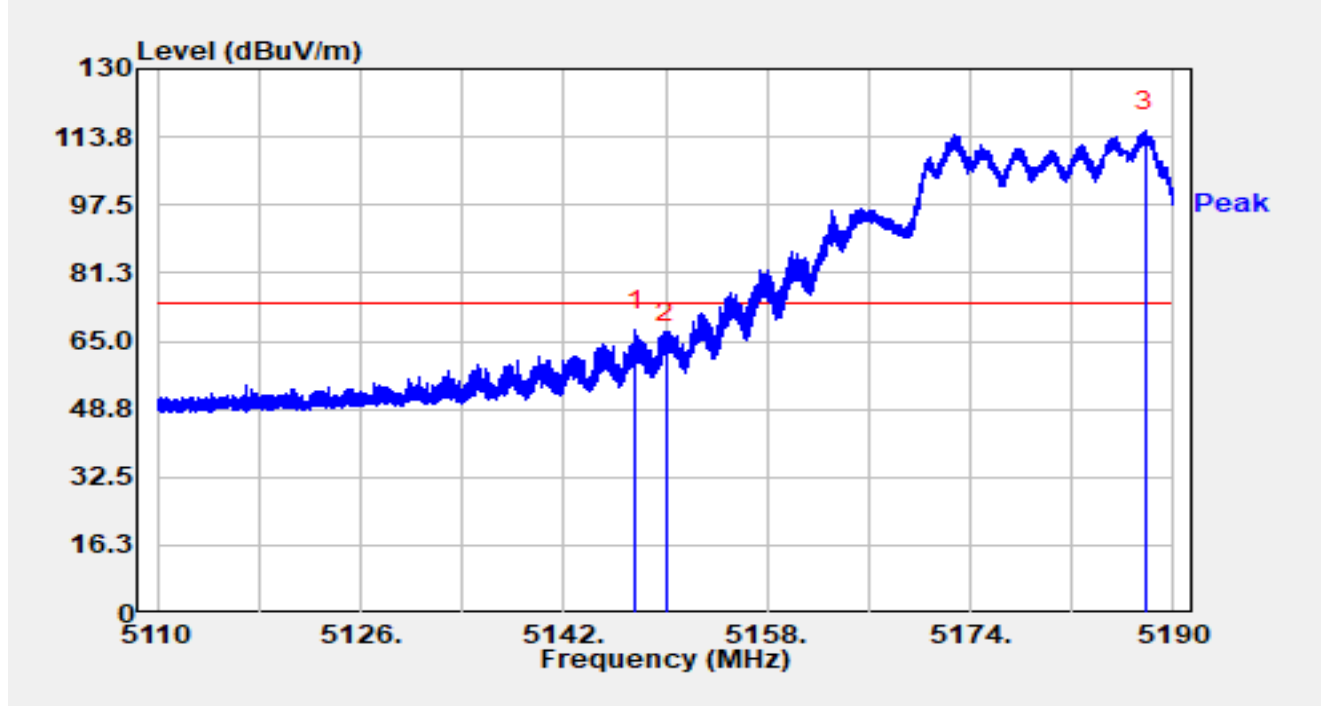


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5147.616	67.89	-0.23	67.66	-6.34	74.00	Peak
2		5150.000	64.34	0.18	64.52	-9.49	74.00	Peak
3		5187.752	75.09	40.02	115.11	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

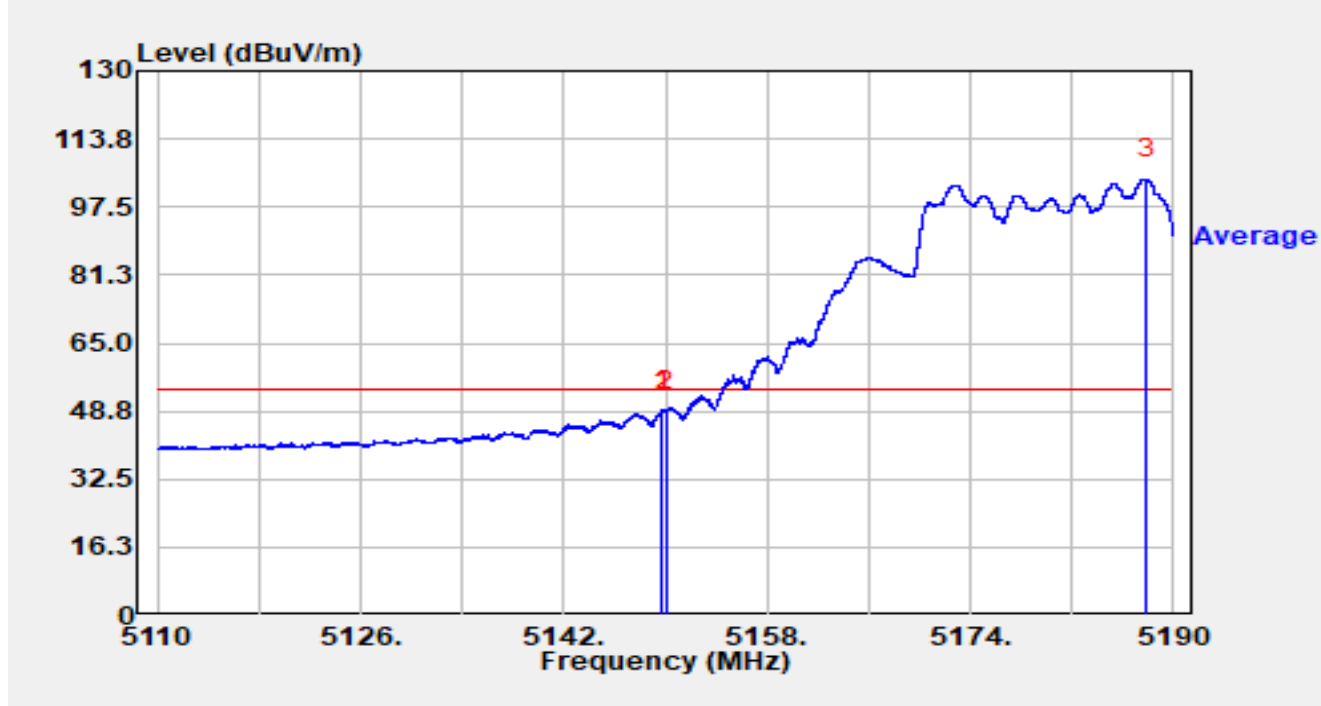


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.768	48.90	0.14	49.04	-4.96	54.00	Average
2		5150.000	48.67	0.18	48.85	-5.15	54.00	Average
3		5187.848	63.95	40.18	104.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

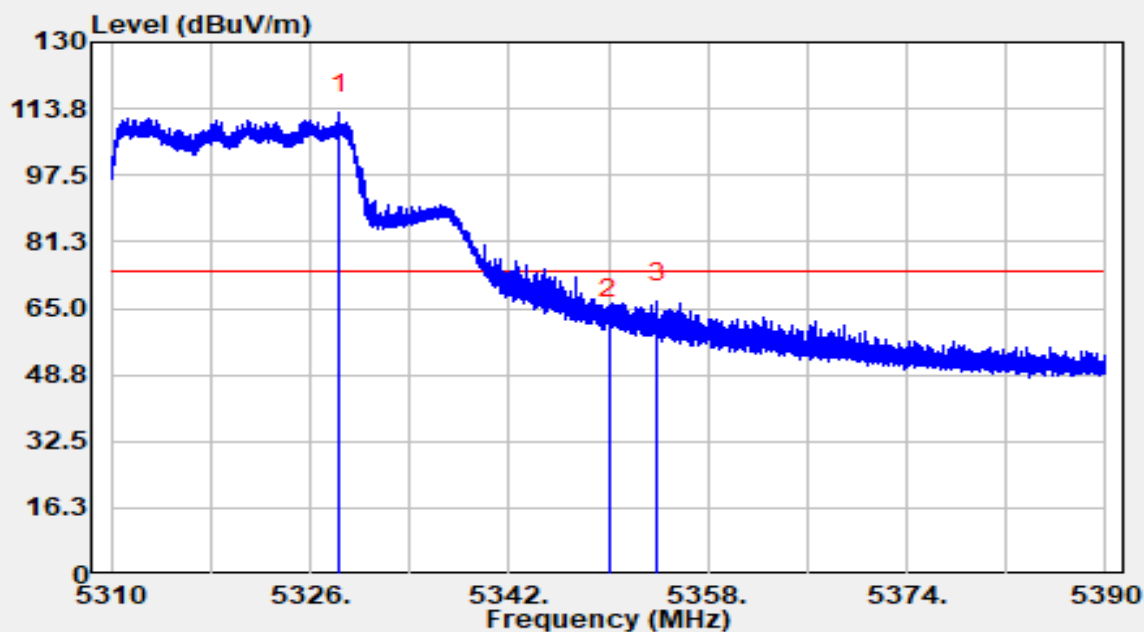


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.352	72.05	40.61	112.66	N/A	N/A	Peak
2		5350.000	63.95	-1.38	62.57	-11.43	74.00	Peak
3	*	5353.896	69.50	-2.81	66.69	-7.31	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

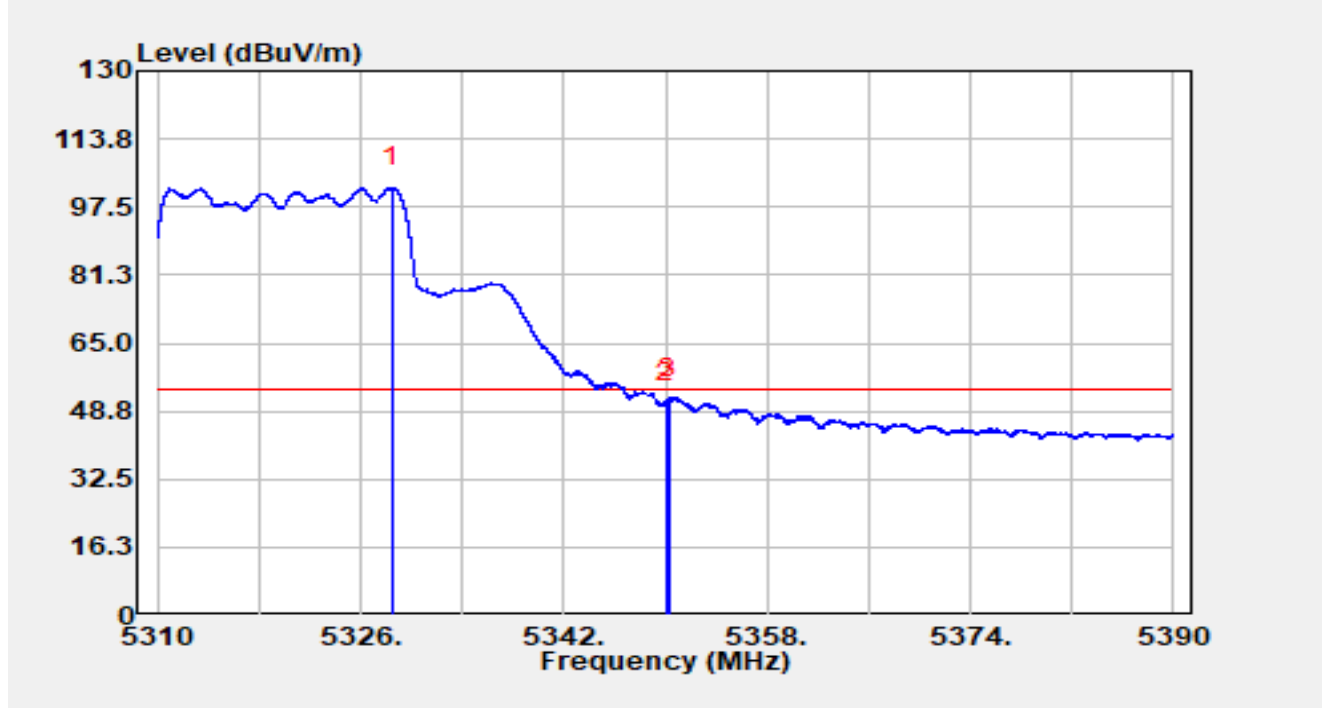


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.488	61.39	40.72	102.11	N/A	N/A	Average
2		5350.000	51.94	-1.38	50.56	-3.44	54.00	Average
3	*	5350.288	53.38	-1.53	51.85	-2.15	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

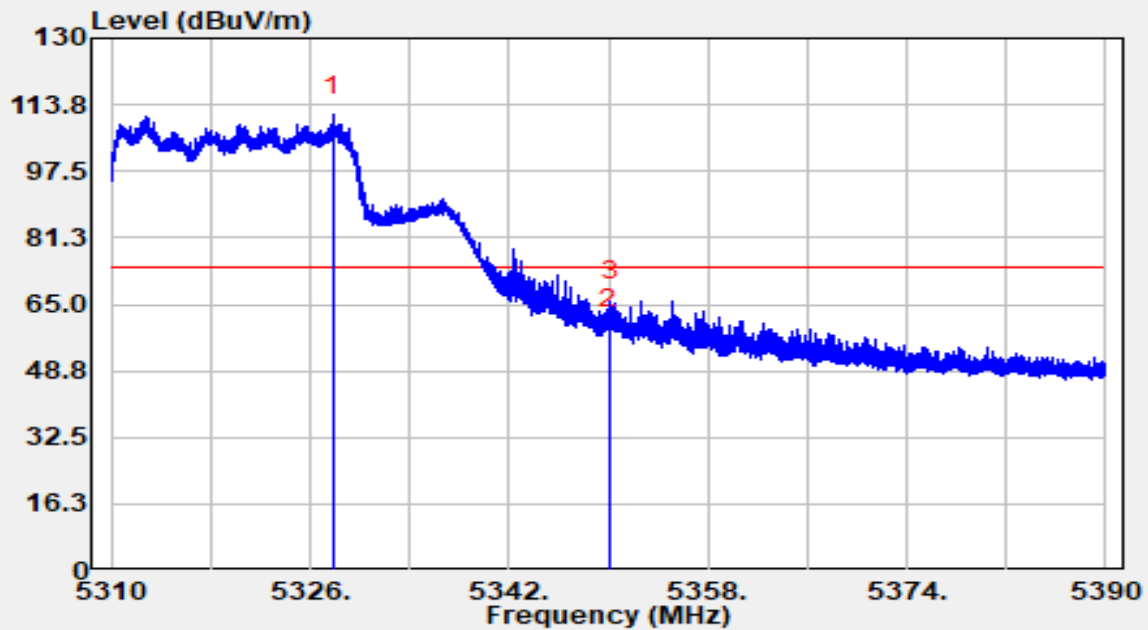


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.872	71.03	40.20	111.22	N/A	N/A	Peak
2		5350.000	60.59	-1.38	59.21	-14.79	74.00	Peak
3	*	5350.200	67.39	-1.49	65.91	-8.09	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

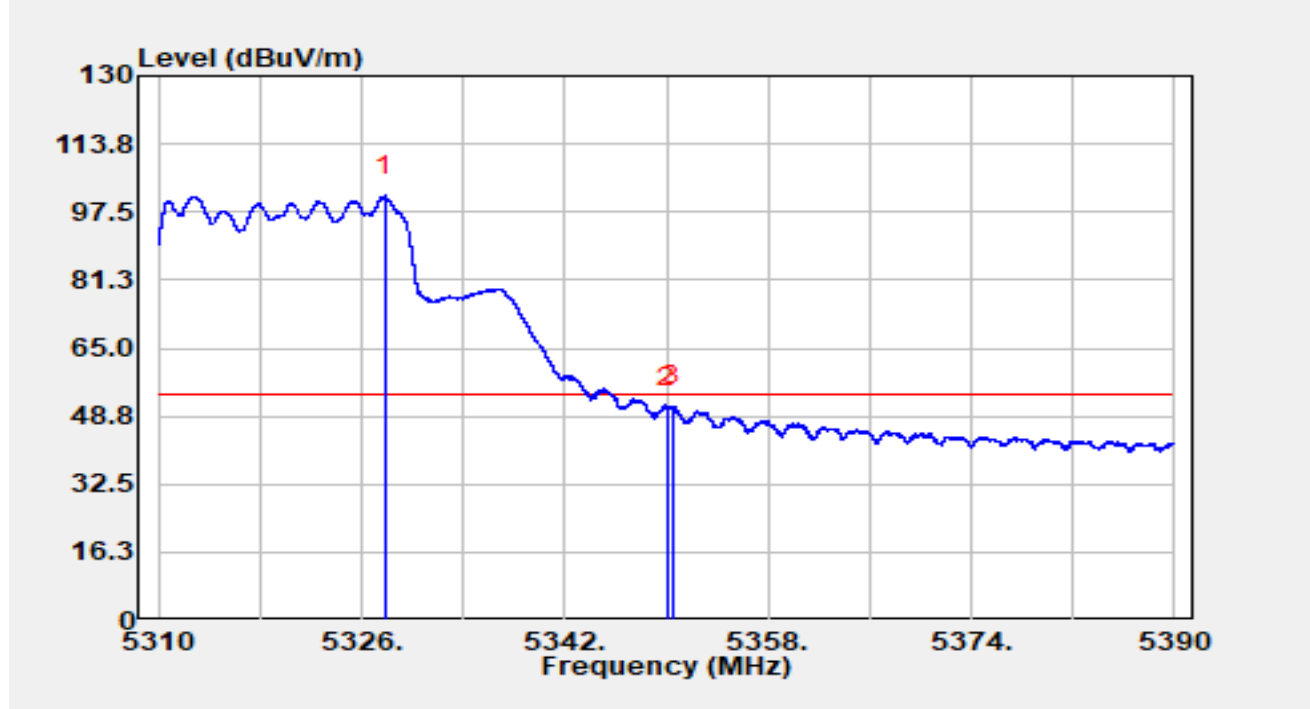


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.840	61.18	40.17	101.35	N/A	N/A	Average
2		5350.000	52.05	-1.38	50.67	-3.33	54.00	Average
3	*	5350.448	52.82	-1.62	51.21	-2.79	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

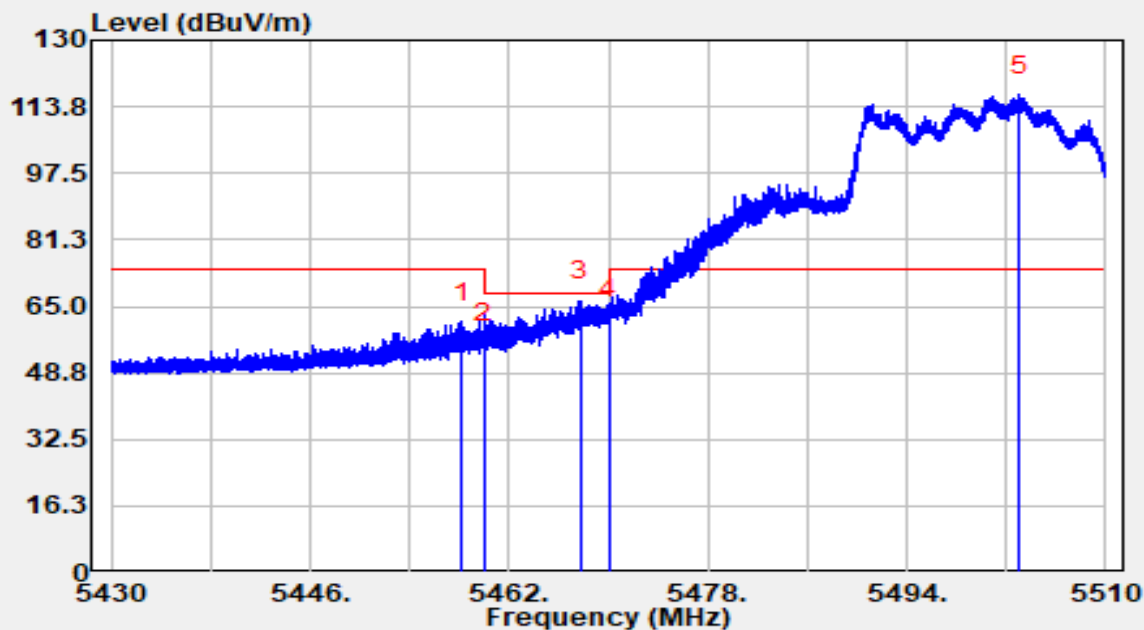


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.232	63.89	-2.69	61.20	-12.80	74.00	Peak
2		5460.000	58.53	-2.55	55.97	-12.23	68.20	Peak
3	*	5467.768	67.90	-1.50	66.41	-1.79	68.20	Peak
4		5470.000	62.81	-0.76	62.05	-6.15	68.20	Peak
5		5503.040	73.65	42.92	116.57	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

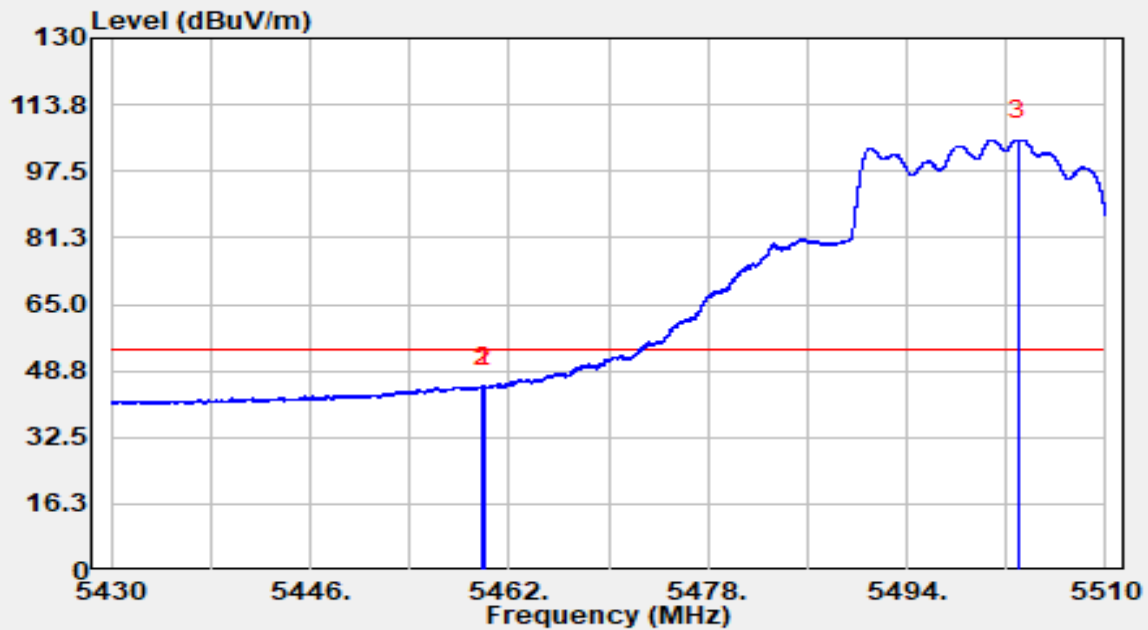


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.904	47.54	-2.57	44.98	-9.02	54.00	Average
2		5460.000	47.42	-2.55	44.86	-9.14	54.00	Average
3		5503.000	62.29	42.84	105.13	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

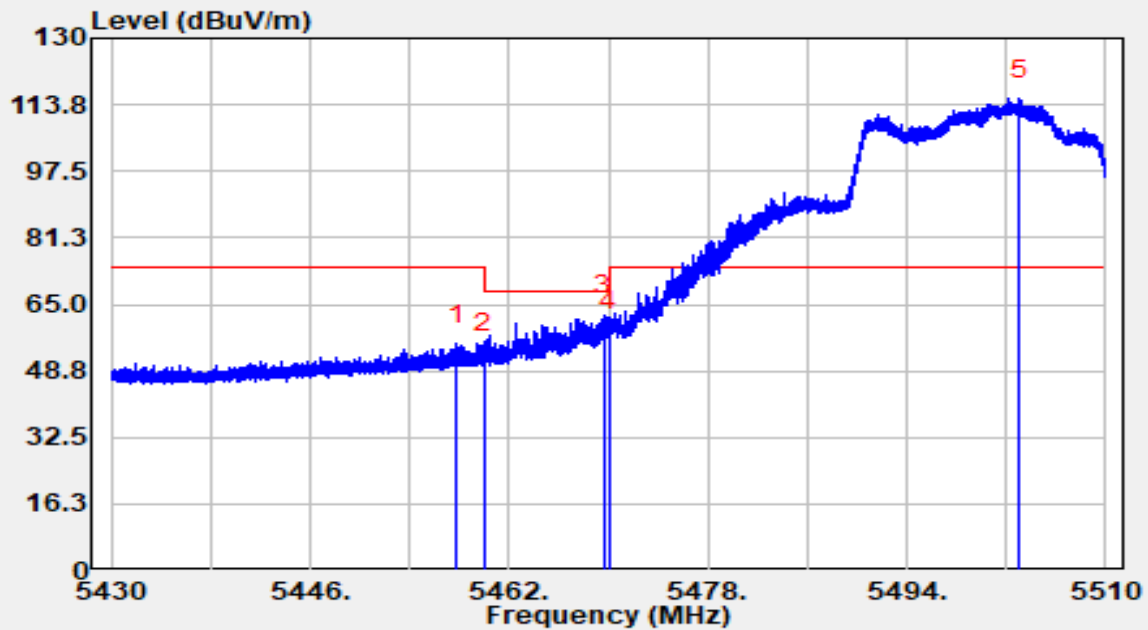


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.752	58.00	-2.77	55.23	-18.77	74.00	Peak
2		5460.000	55.78	-2.55	53.22	-14.98	68.20	Peak
3	*	5469.584	63.29	-0.90	62.39	-5.81	68.20	Peak
4		5470.000	59.29	-0.76	58.53	-9.67	68.20	Peak
5		5503.048	72.31	42.94	115.25	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

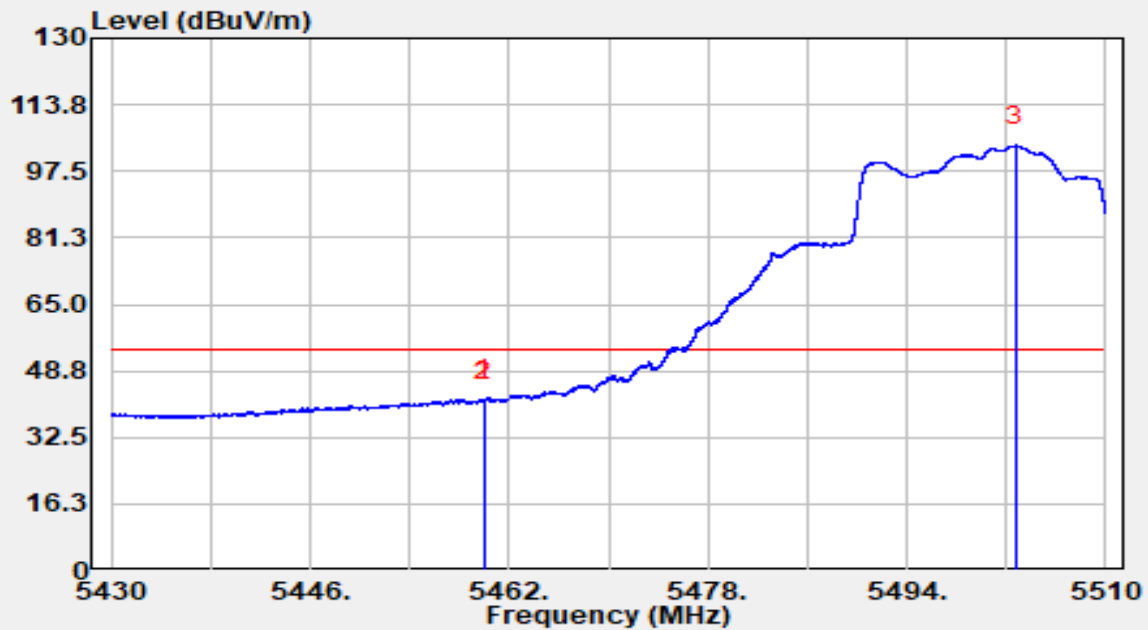


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.944	44.39	-2.56	41.83	-12.17	54.00	Average
2		5460.000	44.08	-2.55	41.53	-12.47	54.00	Average
3		5502.728	61.50	42.26	103.76	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

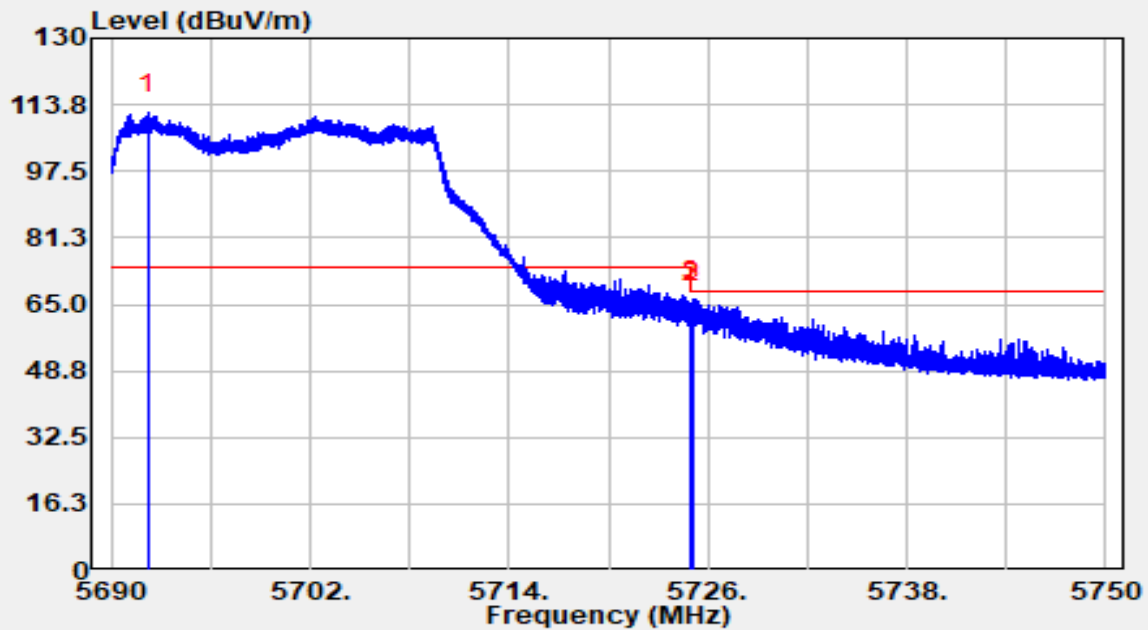


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.214	70.25	41.50	111.75	N/A	N/A	Peak
2		5725.000	66.28	-0.89	65.39	-2.81	68.20	Peak
3	*	5725.052	67.09	-0.92	66.17	-2.03	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

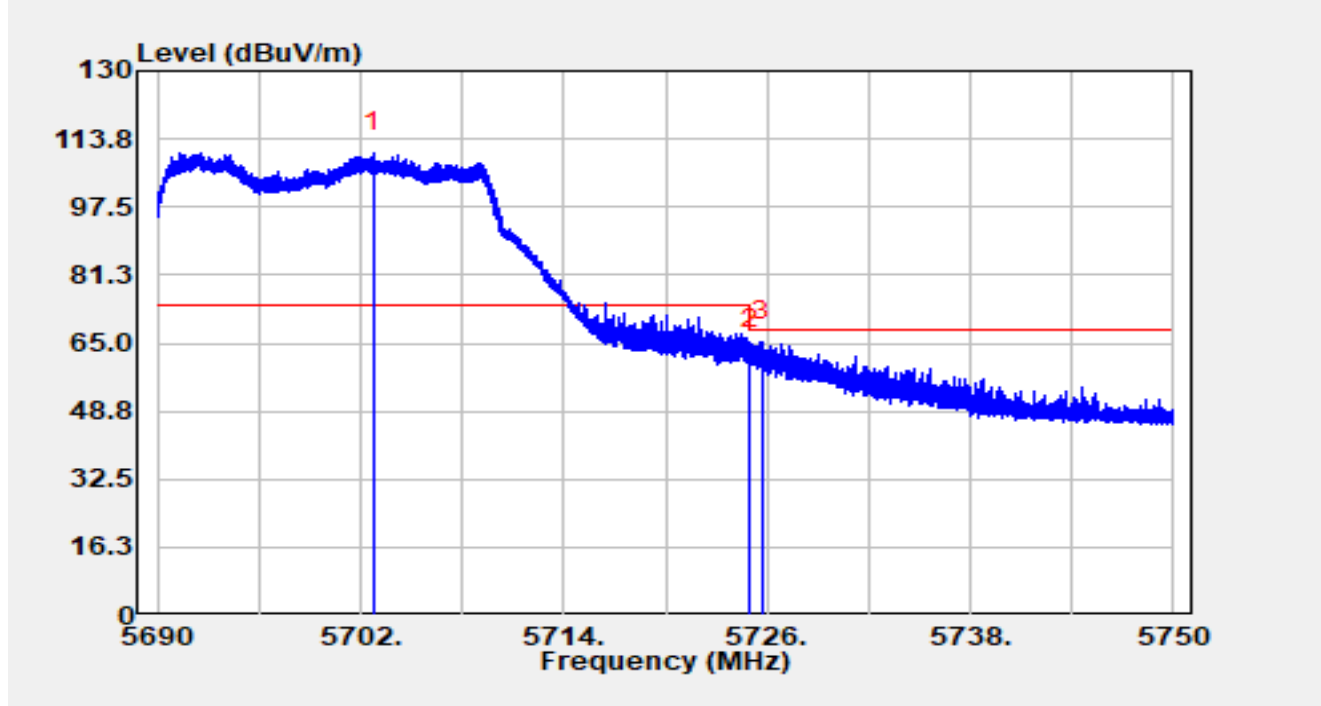


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.714	72.13	38.40	110.53	N/A	N/A	Peak
2		5725.000	64.33	-0.89	63.44	-4.76	68.20	Peak
3	*	5725.670	66.52	-1.26	65.26	-2.94	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

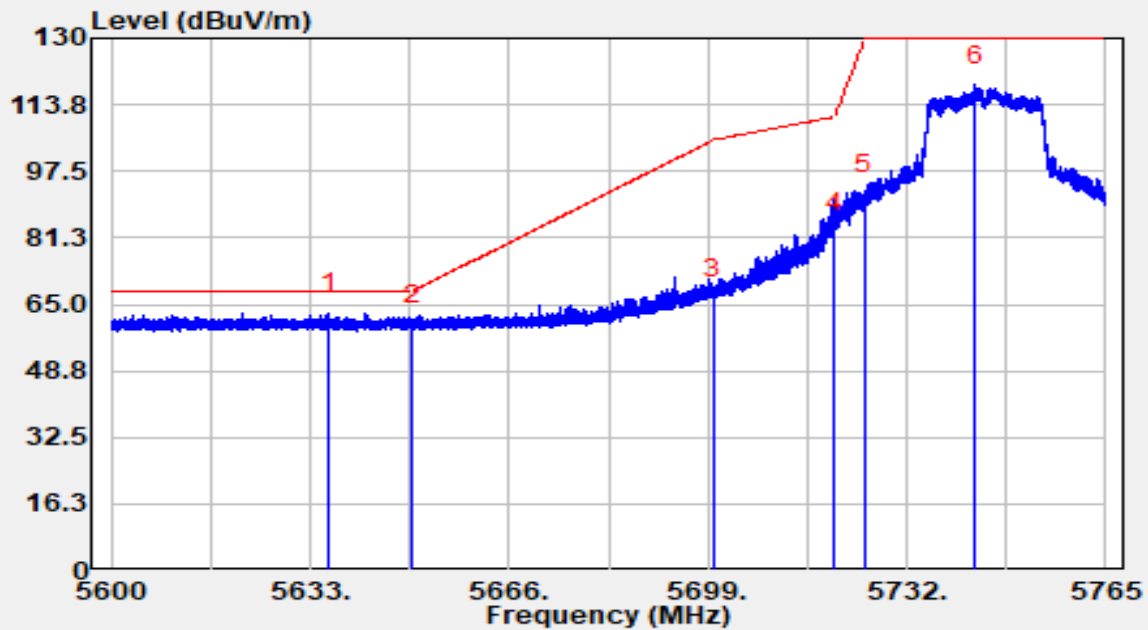


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5636.201	70.58	-7.64	62.95	-5.25	68.20	Peak
2		5650.000	67.72	-7.67	60.05	-8.15	68.20	Peak
3		5700.000	74.04	-7.49	66.56	-38.64	105.20	Peak
4		5720.000	89.89	-7.37	82.52	-28.28	110.80	Peak
5		5725.000	99.13	-7.36	91.77	-38.23	130.00	Peak
6		5743.418	126.10	-7.57	118.53	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

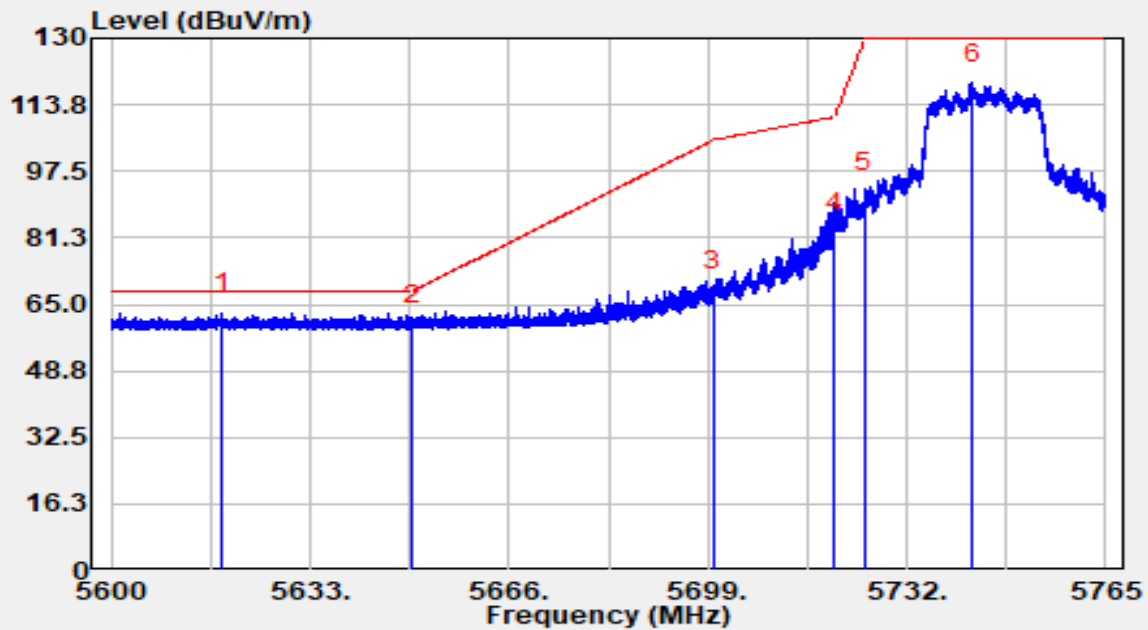


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5618.447	70.37	-7.55	62.82	-5.38	68.20	Peak
2		5650.000	67.87	-7.67	60.20	-8.00	68.20	Peak
3		5700.000	75.89	-7.49	68.40	-36.80	105.20	Peak
4		5720.000	89.94	-7.37	82.57	-28.23	110.80	Peak
5		5725.000	99.67	-7.36	92.31	-37.69	130.00	Peak
6		5742.840	126.65	-7.57	119.08	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

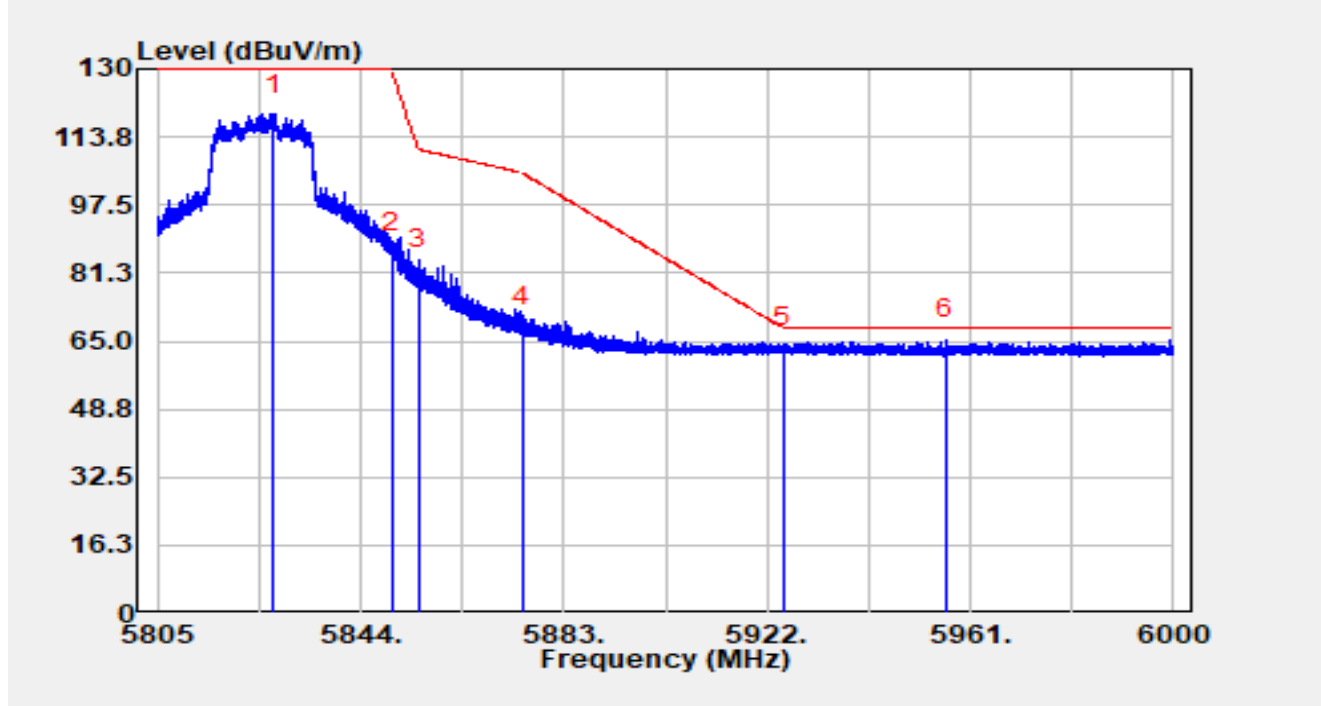


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5827.210	124.91	-5.73	119.18	N/A	N/A	Peak
2		5850.000	91.71	-5.64	86.07	-43.93	130.00	Peak
3		5855.000	87.92	-5.69	82.23	-28.57	110.80	Peak
4		5875.000	74.31	-5.74	68.57	-36.63	105.20	Peak
5		5925.000	68.95	-5.59	63.36	-4.84	68.20	Peak
6	*	5956.203	71.06	-5.59	65.47	-2.73	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

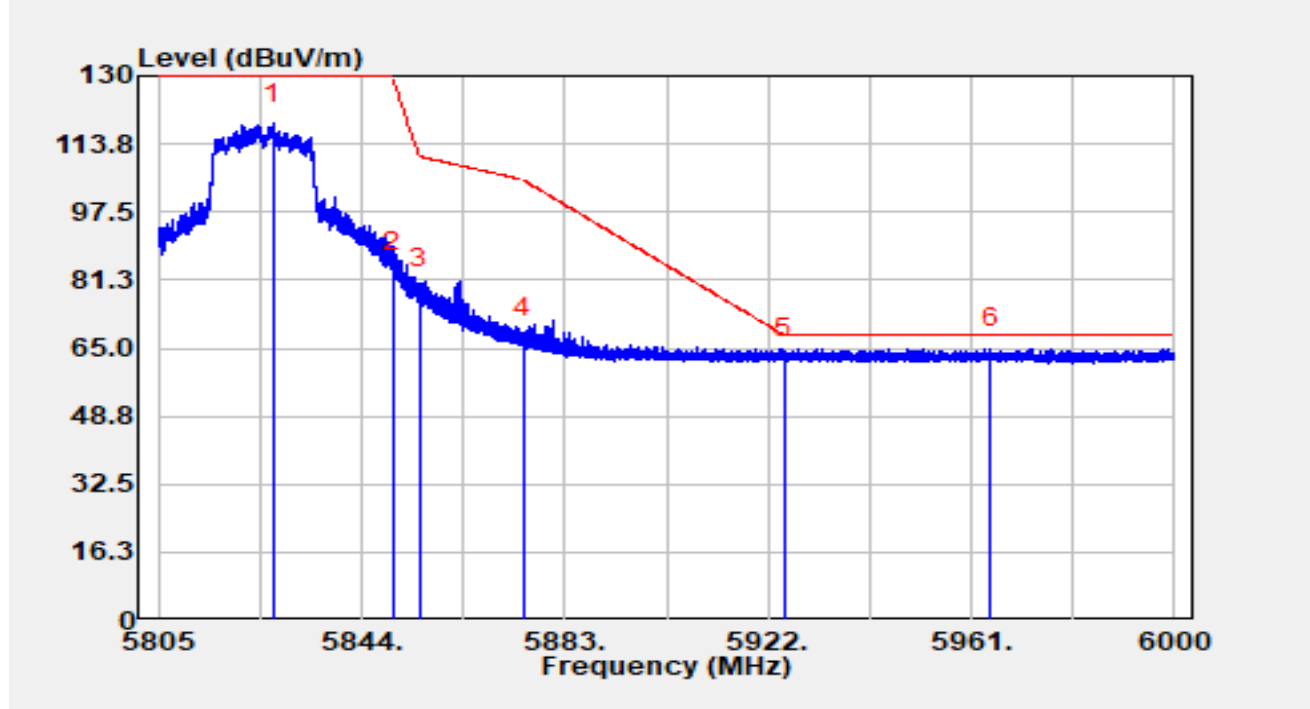


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5827.055	124.43	-5.73	118.70	N/A	N/A	Peak
2		5850.000	88.83	-5.64	83.20	-46.80	130.00	Peak
3		5855.000	85.01	-5.69	79.32	-31.48	110.80	Peak
4		5875.000	73.39	-5.74	67.65	-37.55	105.20	Peak
5		5925.000	68.17	-5.59	62.58	-5.62	68.20	Peak
6	*	5964.646	70.49	-5.50	64.98	-3.22	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

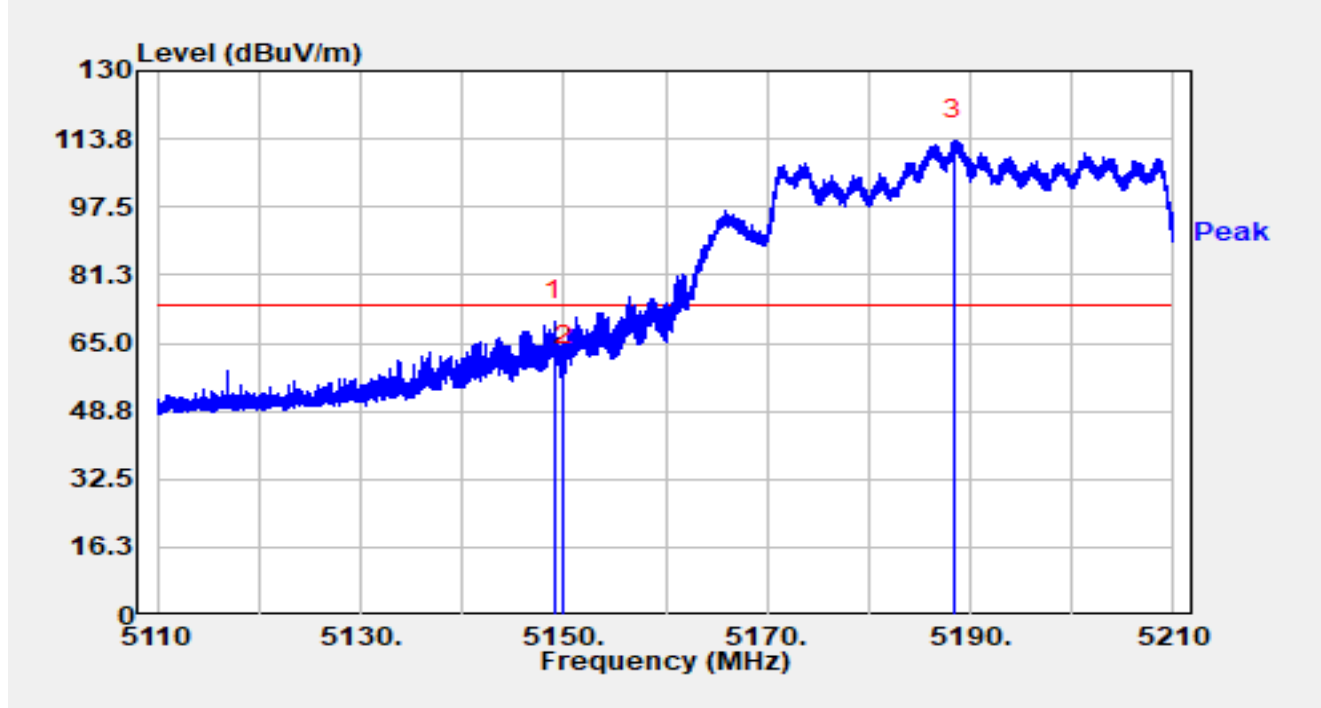


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.070	70.24	0.00	70.24	-3.76	74.00	Peak
2		5150.000	59.55	0.18	59.73	-14.27	74.00	Peak
3		5188.390	72.28	41.06	113.34	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

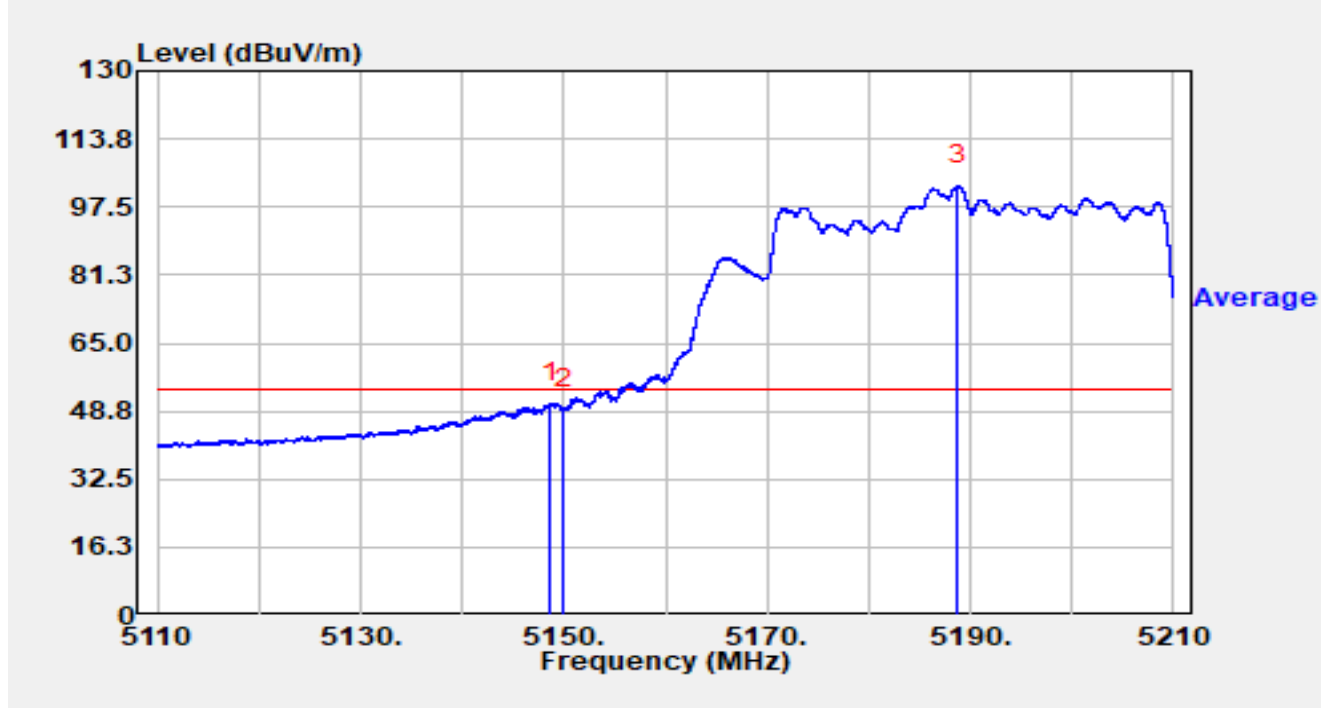


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.680	50.67	-0.08	50.59	-3.41	54.00	Average
2		5150.000	48.93	0.18	49.11	-4.89	54.00	Average
3		5188.790	60.97	41.61	102.57	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

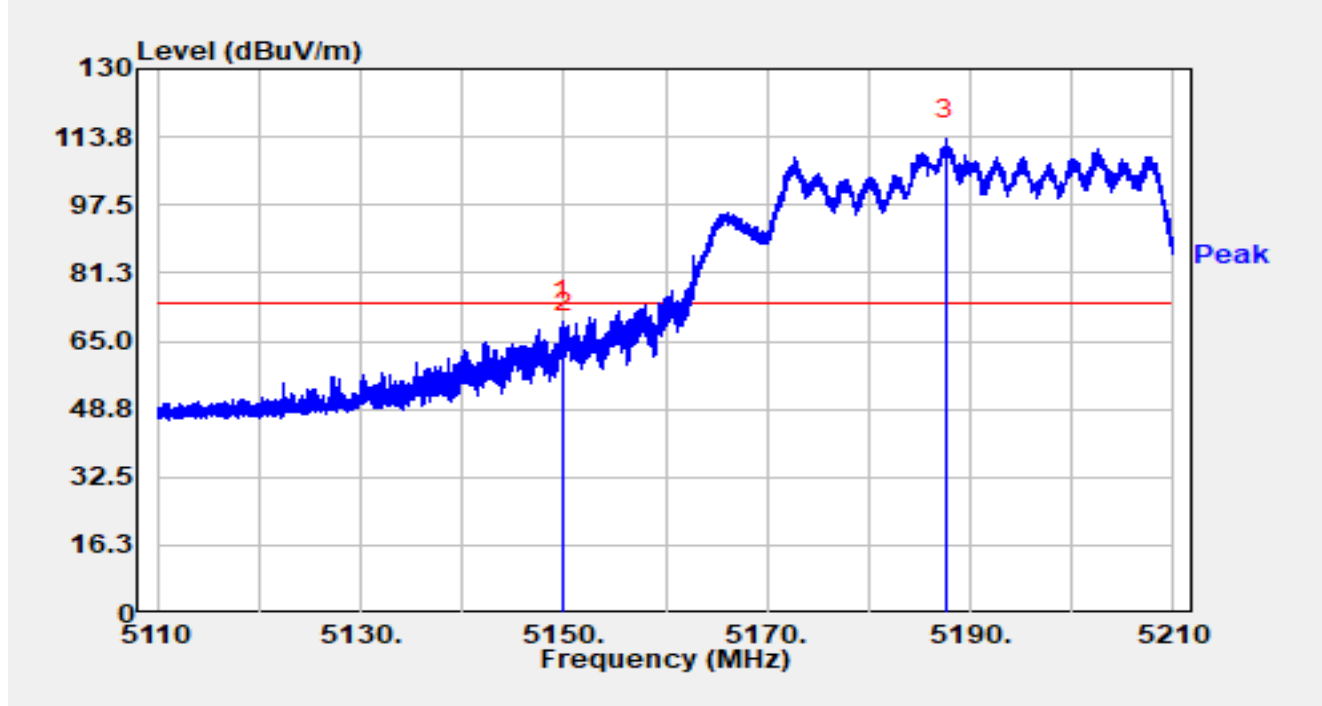


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5149.870	69.51	0.16	69.67	-4.33	74.00	Peak
2		5150.000	66.83	0.18	67.00	-7.00	74.00	Peak
3		5187.590	73.37	39.76	113.13	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

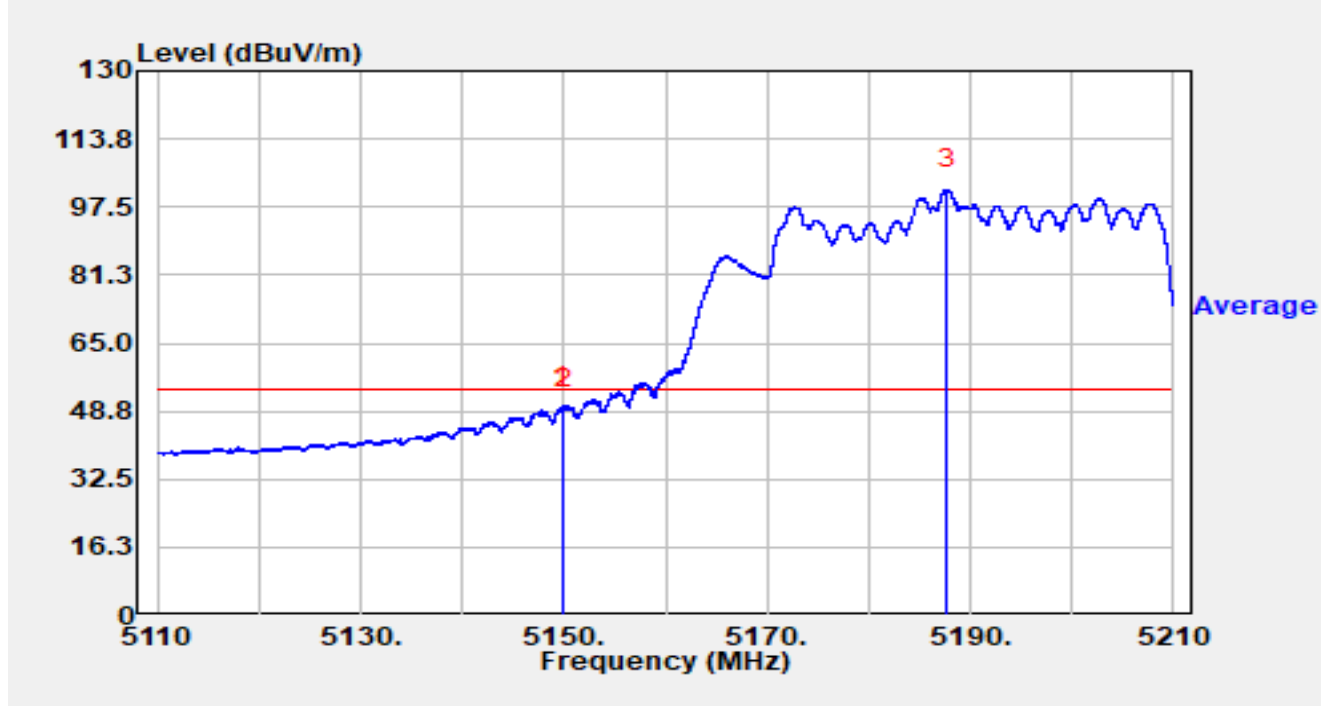


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.890	49.61	0.16	49.77	-4.23	54.00	Average
2		5150.000	49.11	0.18	49.28	-4.72	54.00	Average
3		5187.690	61.69	39.92	101.60	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

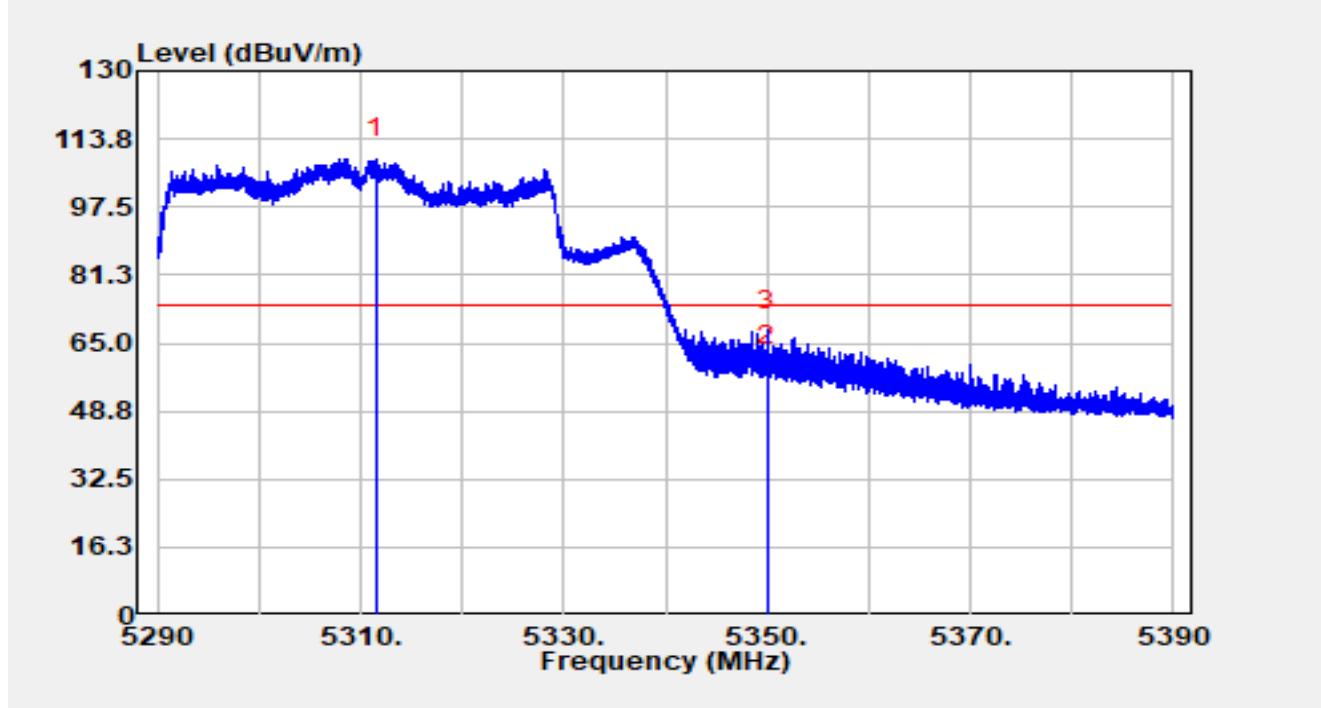


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.470	63.77	45.23	109.00	N/A	N/A	Peak
2		5350.000	61.03	-1.38	59.65	-14.35	74.00	Peak
3	*	5350.030	69.49	-1.39	68.09	-5.91	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

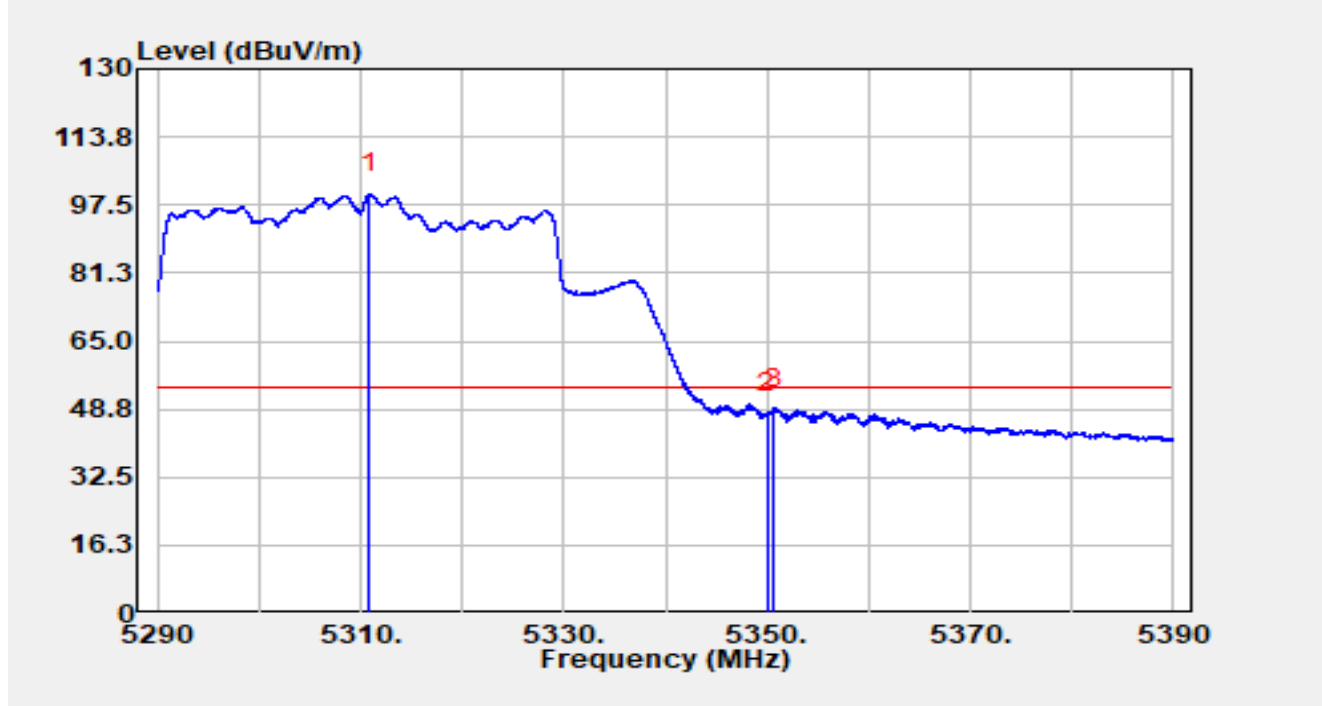


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5310.840	55.85	44.30	100.14	N/A	N/A	Average
2		5350.000	49.15	-1.38	47.77	-6.23	54.00	Average
3	*	5350.730	50.73	-1.76	48.97	-5.03	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

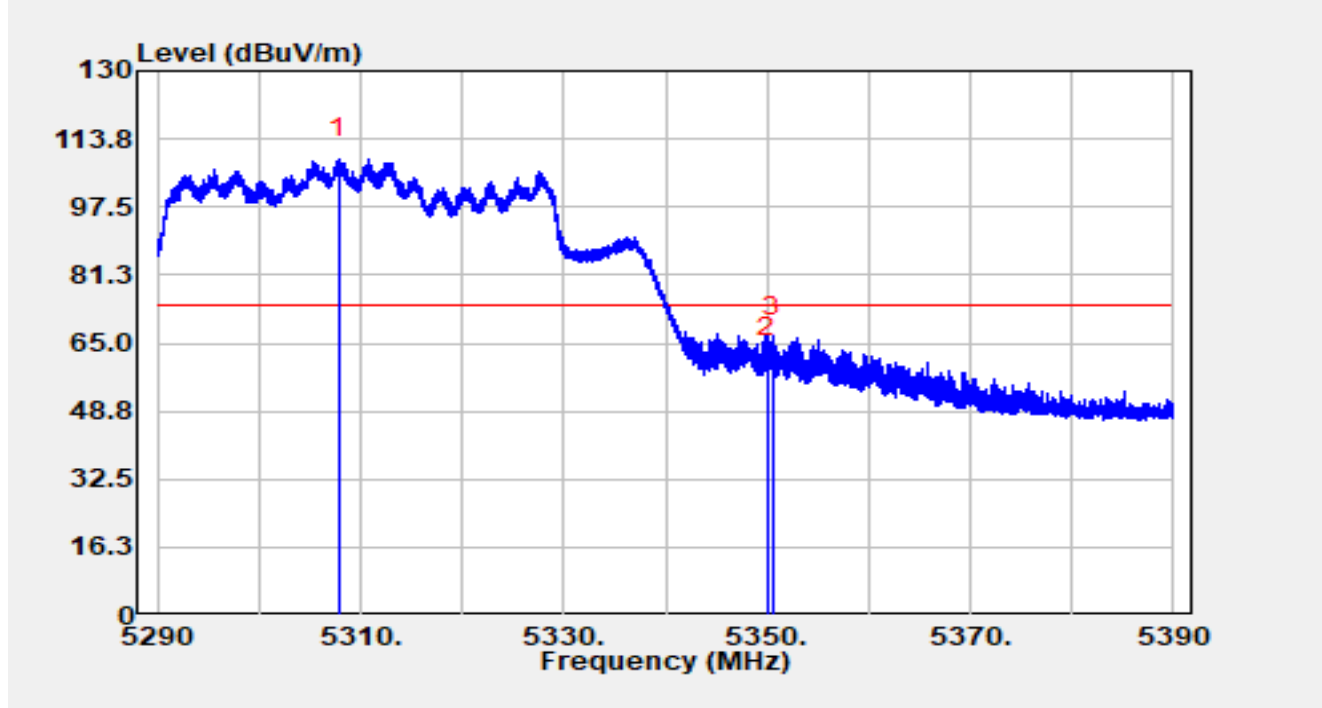


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.900	68.29	40.65	108.94	N/A	N/A	Peak
2		5350.000	63.15	-1.38	61.77	-12.23	74.00	Peak
3	*	5350.480	68.29	-1.63	66.65	-7.35	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

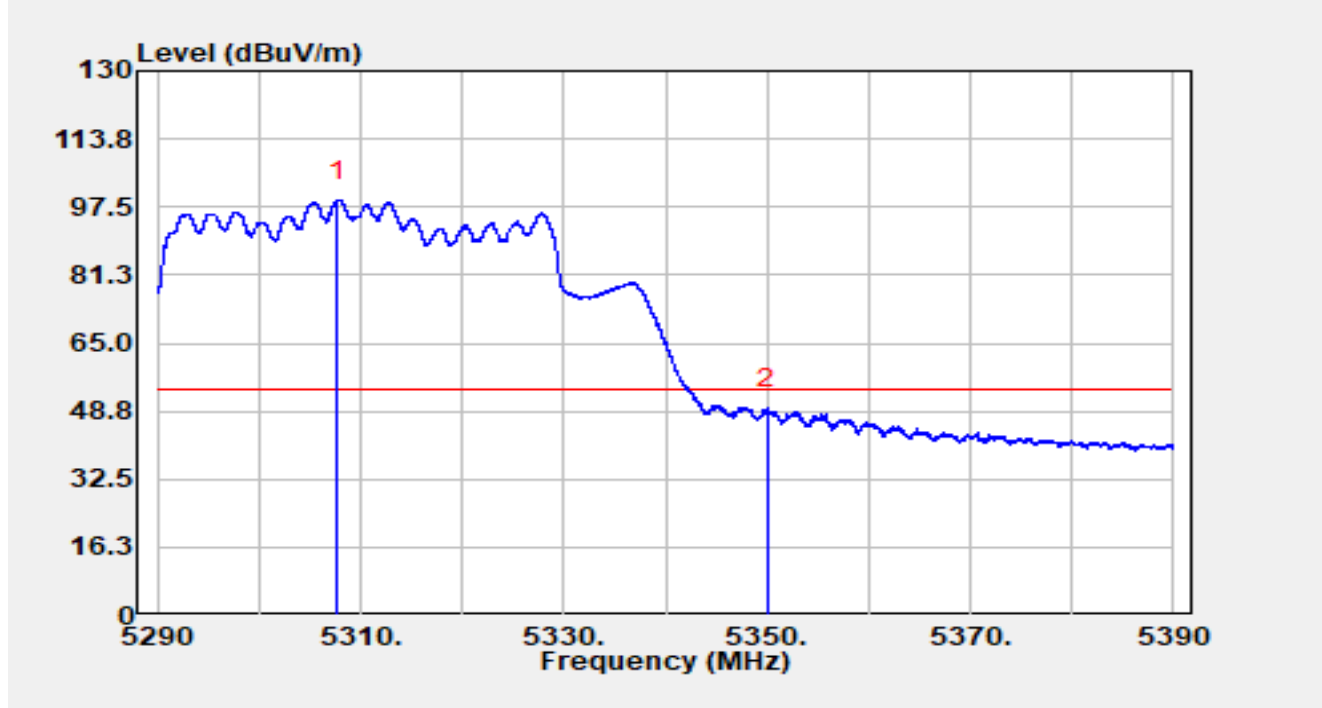


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.740	58.57	40.52	99.09	N/A	N/A	Average
2	*	5350.000	50.69	-1.38	49.31	-4.69	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

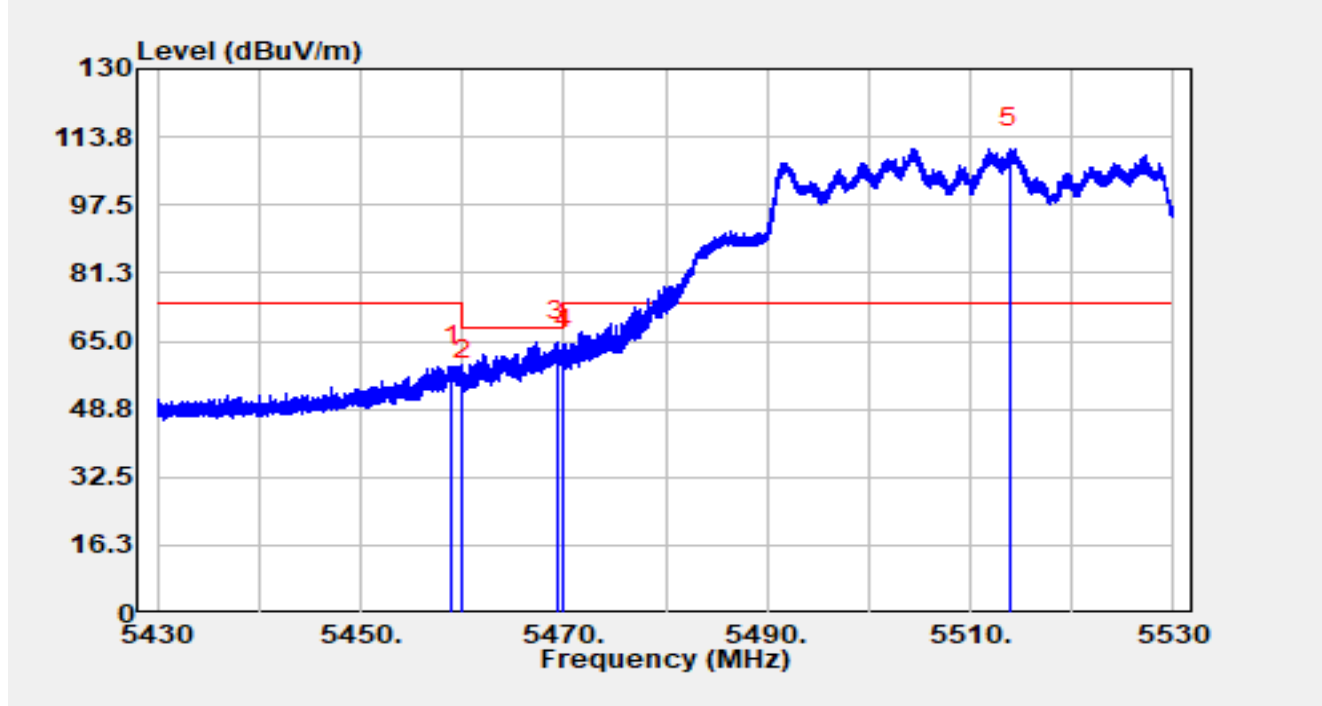


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.980	61.76	-2.68	59.08	-14.92	74.00	Peak
2		5460.000	58.30	-2.55	55.74	-12.46	68.20	Peak
3	*	5469.300	65.78	-0.96	64.82	-3.38	68.20	Peak
4		5470.000	63.81	-0.76	63.05	-5.15	68.20	Peak
5		5513.850	67.91	43.05	110.96	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

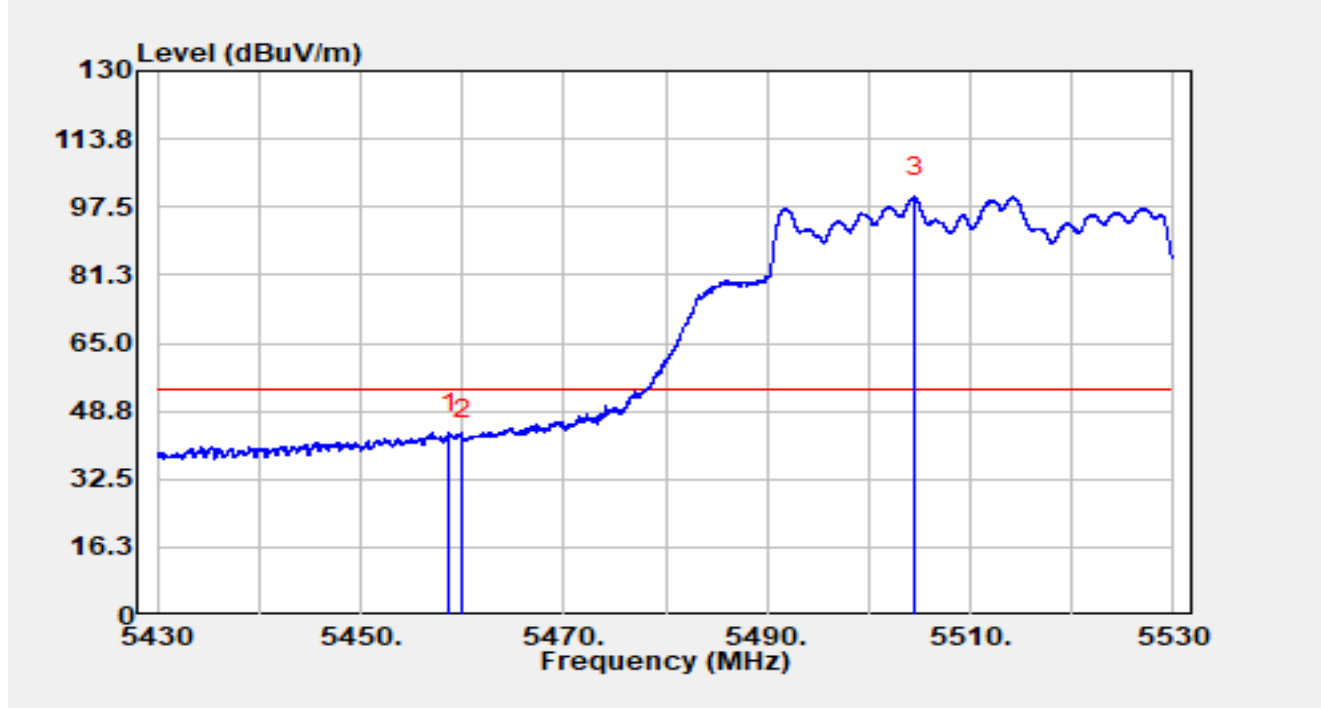


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.760	46.26	-2.69	43.56	-10.44	54.00	Average
2		5460.000	44.67	-2.55	42.12	-11.88	54.00	Average
3		5504.520	55.14	44.74	99.88	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

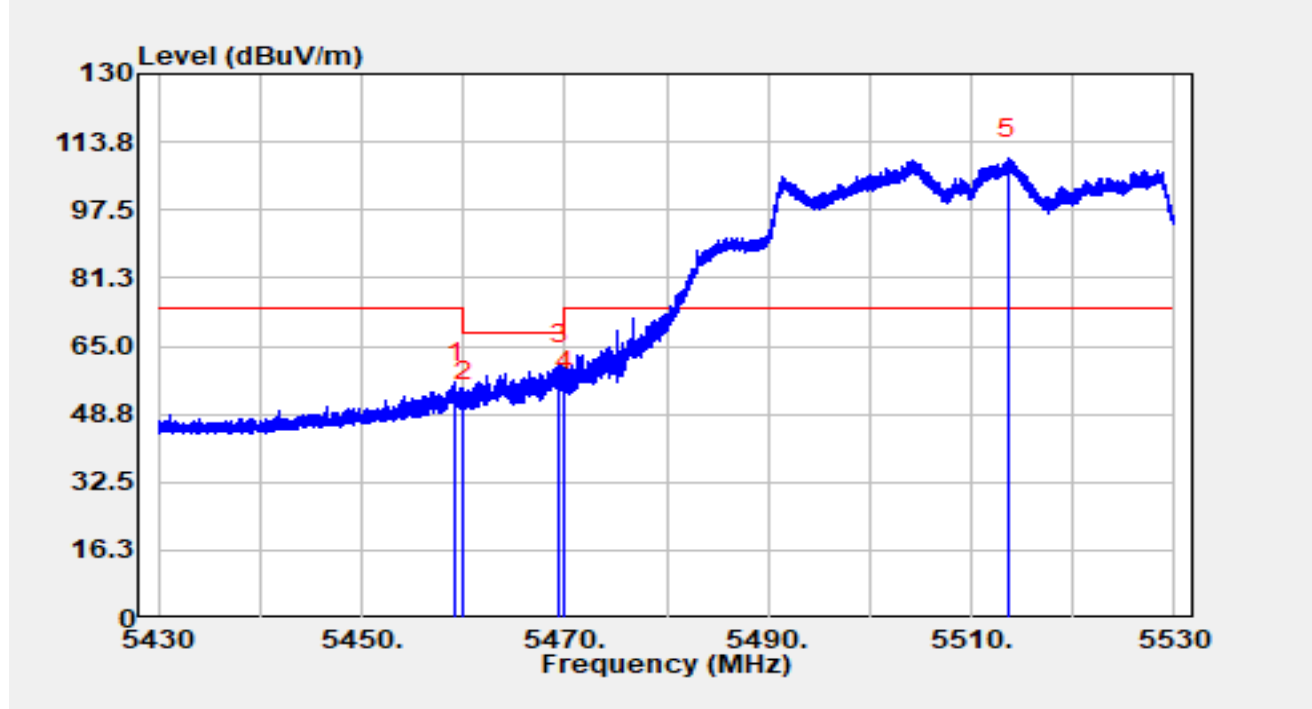


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.250	58.91	-2.65	56.26	-17.74	74.00	Peak
2		5460.000	54.55	-2.55	52.00	-16.20	68.20	Peak
3	*	5469.510	61.48	-0.92	60.56	-7.64	68.20	Peak
4		5470.000	55.03	-0.76	54.27	-13.93	68.20	Peak
5		5513.650	66.84	42.98	109.83	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

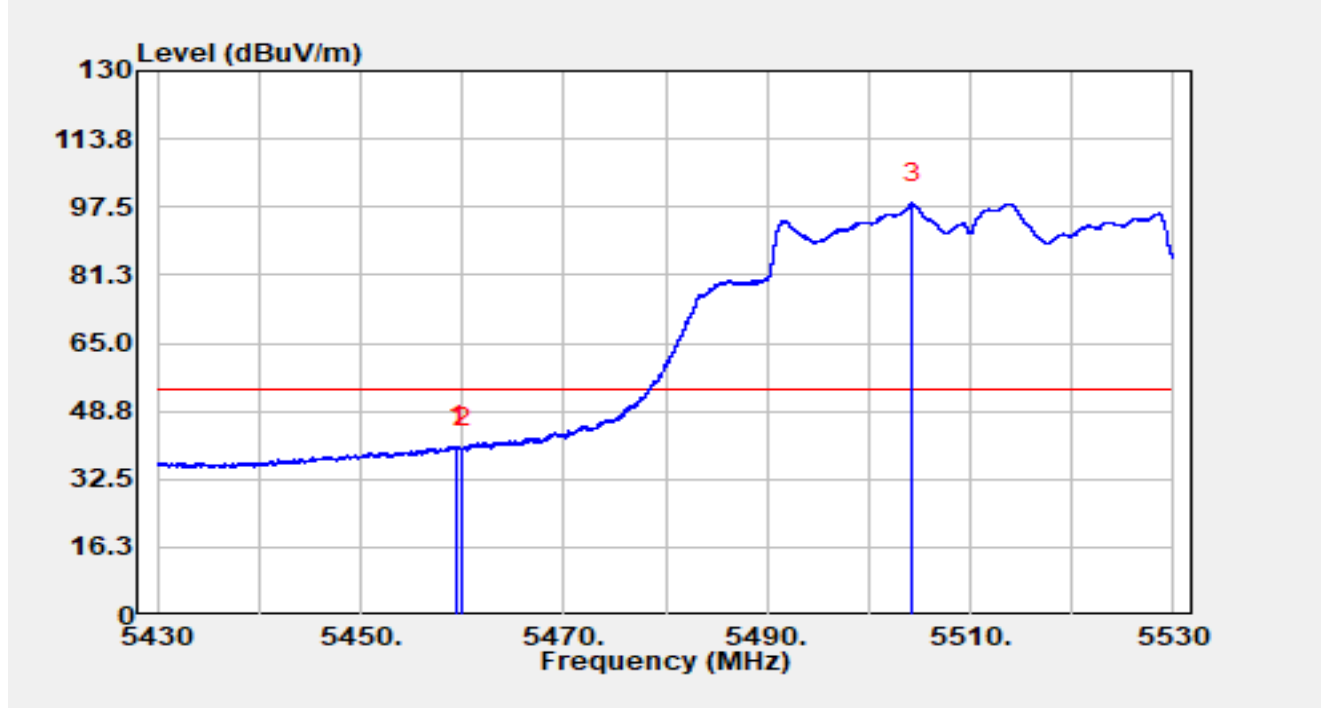


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.450	43.09	-2.63	40.46	-13.54	54.00	Average
2		5460.000	42.38	-2.55	39.83	-14.17	54.00	Average
3		5504.290	53.86	44.61	98.48	N/A	N/A	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

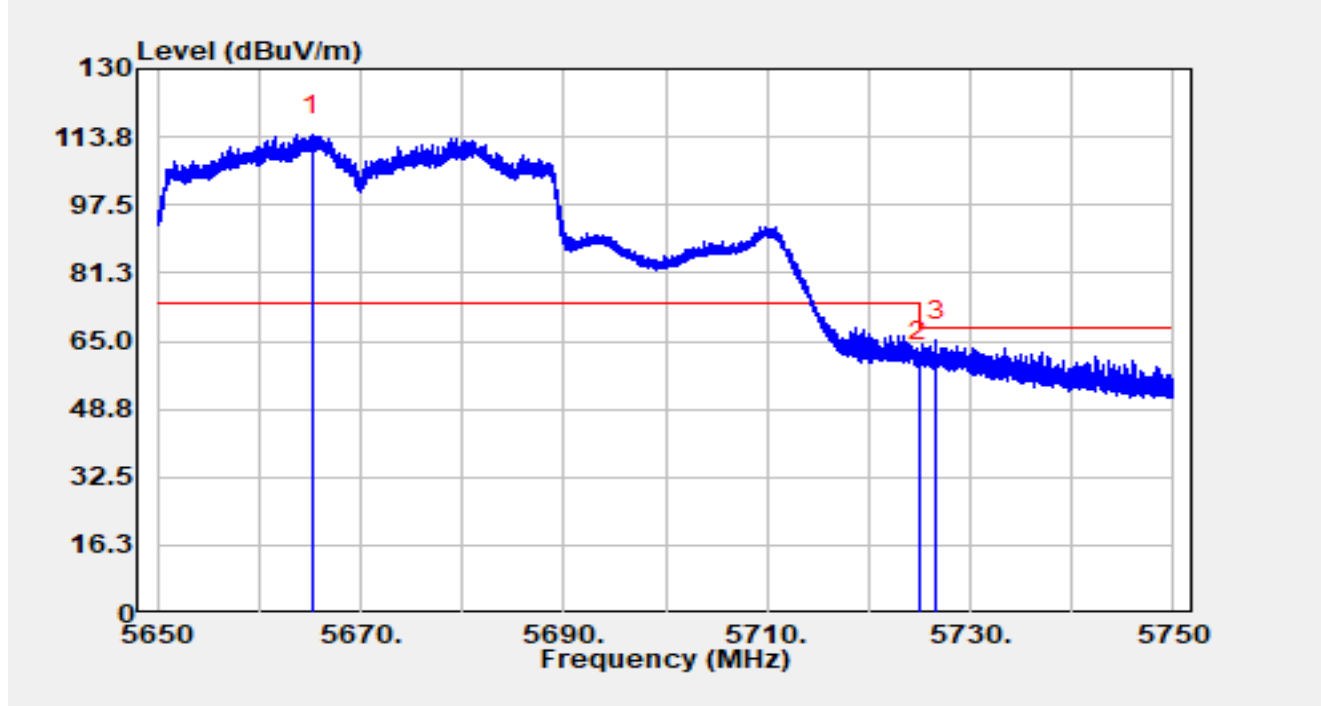


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5665.270	71.20	43.06	114.27	N/A	N/A	Peak
2		5725.000	61.05	-0.89	60.16	-8.04	68.20	Peak
3	*	5726.610	66.86	-1.68	65.18	-3.02	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

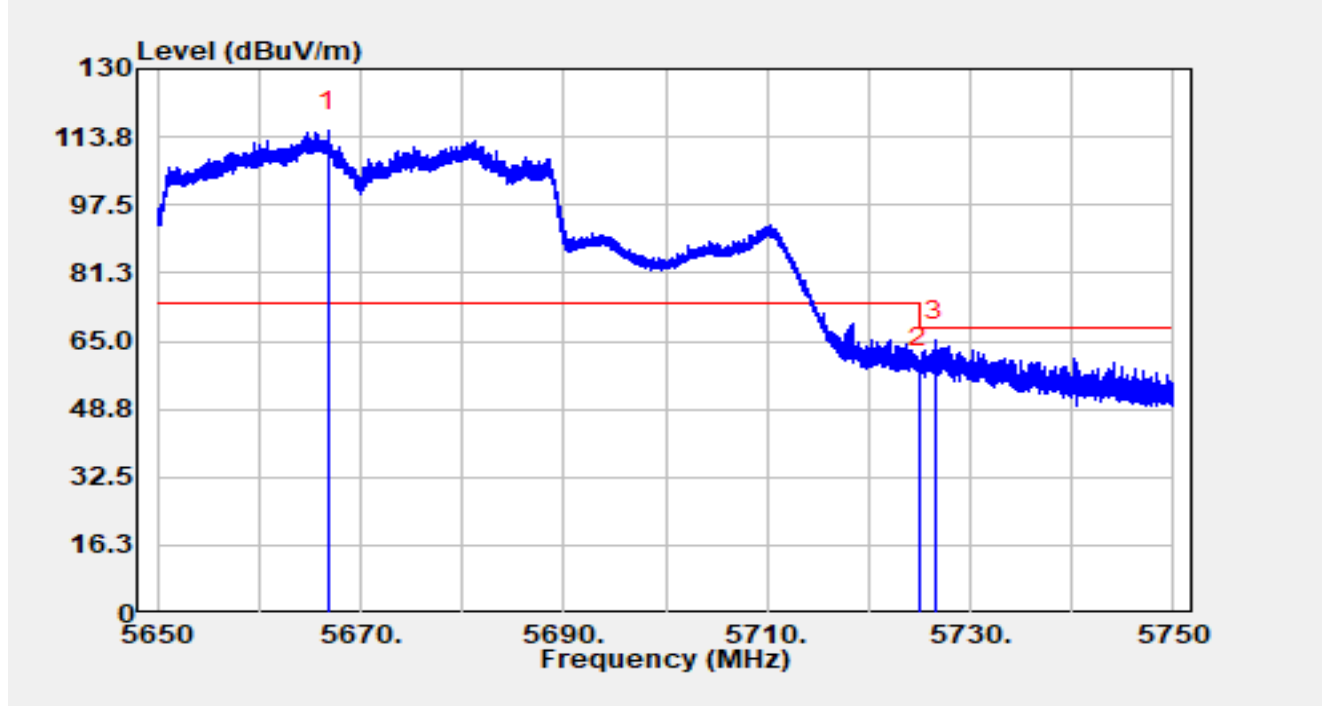


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5666.810	70.45	44.63	115.08	N/A	N/A	Peak
2		5725.000	59.51	-0.89	58.62	-9.58	68.20	Peak
3	*	5726.510	66.71	-1.64	65.07	-3.13	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

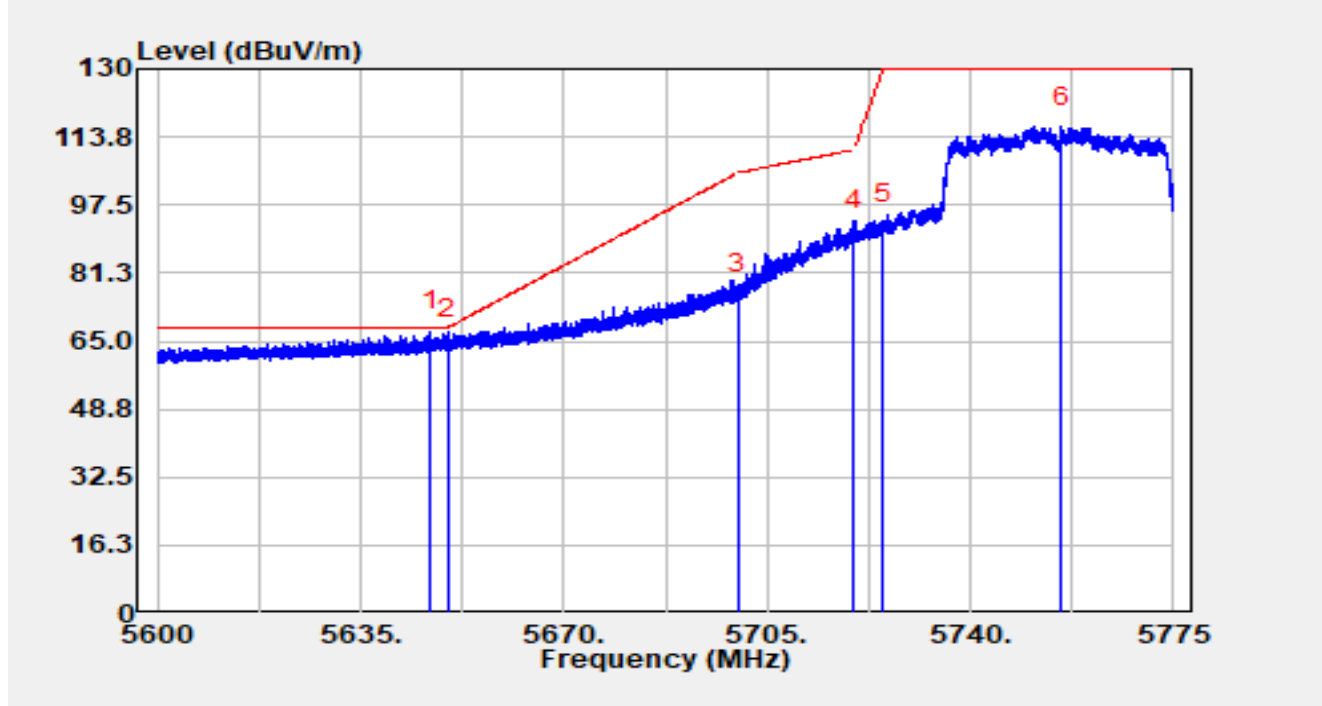


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.127	75.05	-7.68	67.37	-0.83	68.20	Peak
2		5650.000	73.34	-7.67	65.67	-2.53	68.20	Peak
3		5700.000	83.85	-7.49	76.36	-28.84	105.20	Peak
4		5720.000	99.08	-7.37	91.70	-19.10	110.80	Peak
5		5725.000	100.08	-7.36	92.73	-37.27	130.00	Peak
6		5755.627	123.64	-7.53	116.11	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

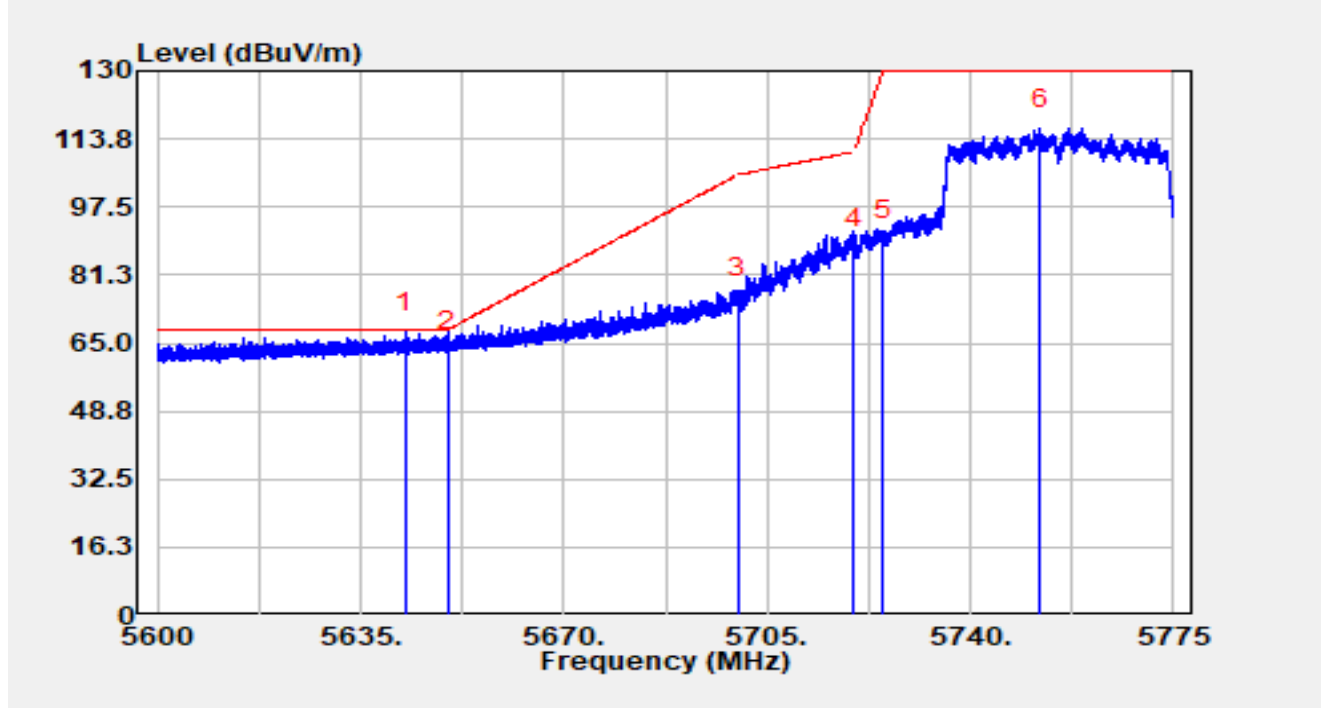


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.647	75.34	-7.69	67.65	-0.55	68.20	Peak
2		5650.000	70.82	-7.67	63.15	-5.05	68.20	Peak
3		5700.000	83.47	-7.49	75.98	-29.22	105.20	Peak
4		5720.000	94.80	-7.37	87.42	-23.38	110.80	Peak
5		5725.000	96.69	-7.36	89.33	-40.67	130.00	Peak
6		5752.022	123.80	-7.54	116.26	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

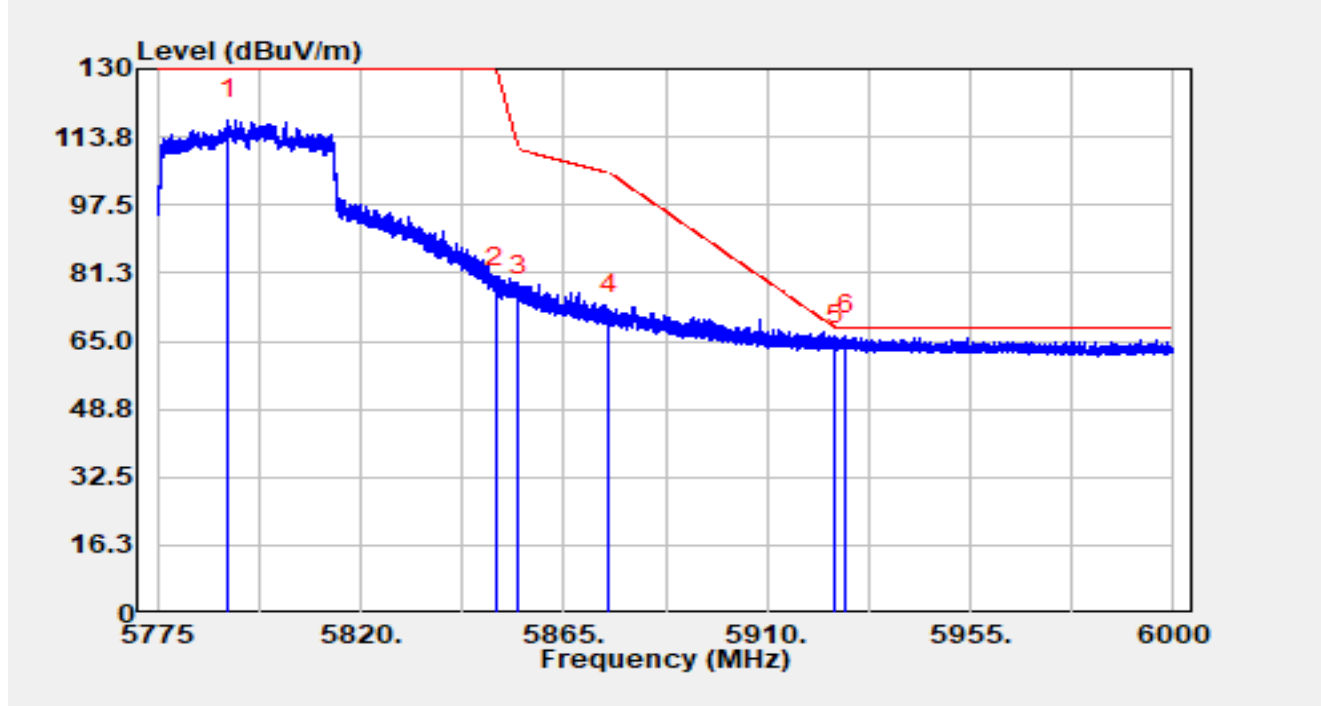


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5790.683	123.45	-5.60	117.86	N/A	N/A	Peak
2		5850.000	83.17	-5.64	77.53	-52.47	130.00	Peak
3		5855.000	81.47	-5.69	75.78	-35.02	110.80	Peak
4		5875.000	77.19	-5.74	71.45	-33.75	105.20	Peak
5		5925.000	69.46	-5.59	63.87	-4.33	68.20	Peak
6	*	5927.550	71.89	-5.56	66.33	-1.87	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

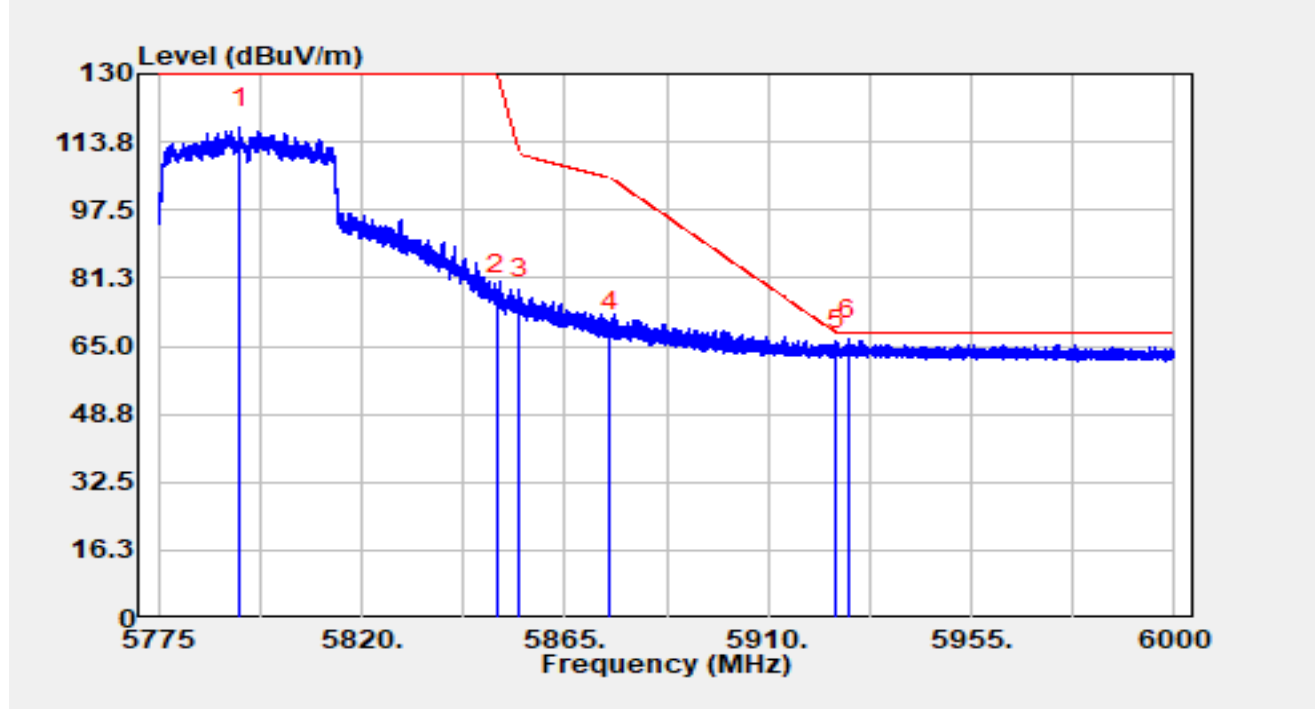


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5793.045	122.71	-5.60	117.12	N/A	N/A	Peak
2		5850.000	83.02	-5.64	77.38	-52.62	130.00	Peak
3		5855.000	82.16	-5.69	76.47	-34.33	110.80	Peak
4		5875.000	74.33	-5.74	68.59	-36.61	105.20	Peak
5		5925.000	69.45	-5.59	63.86	-4.34	68.20	Peak
6	*	5927.730	72.06	-5.56	66.50	-1.70	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

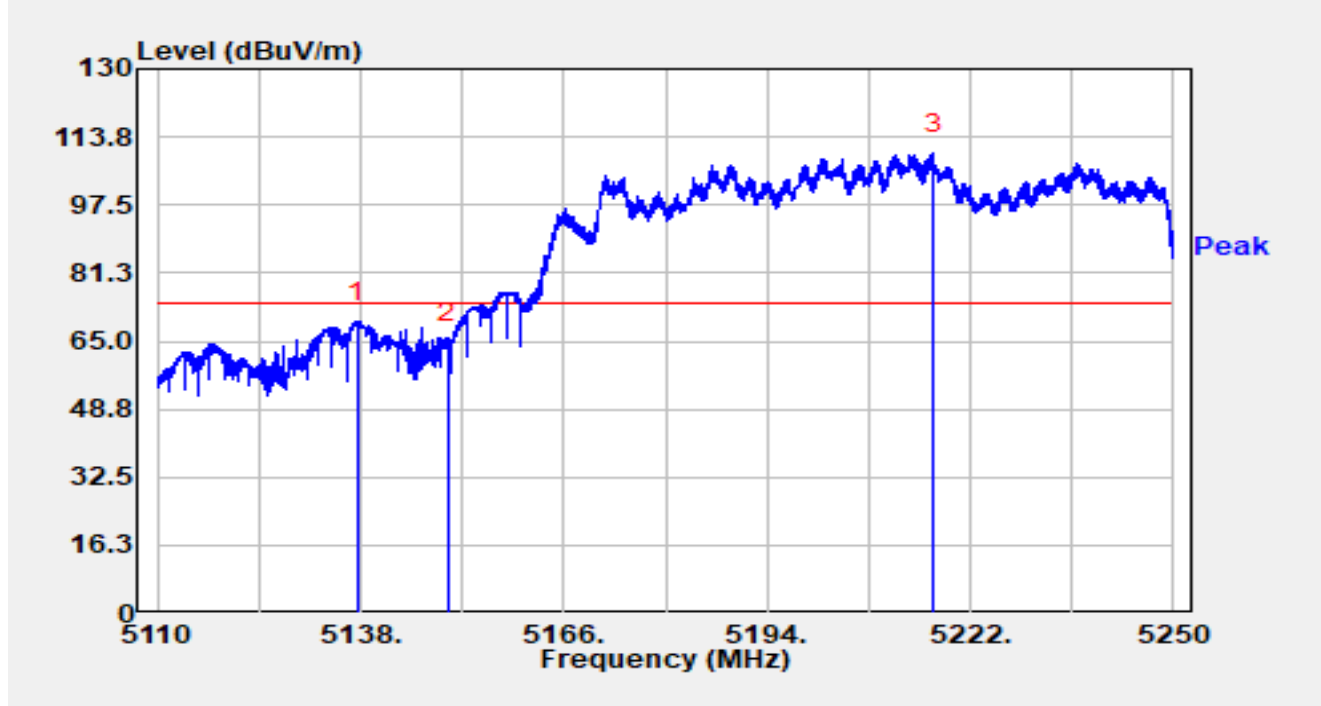


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5137.552	70.99	-1.42	69.57	-4.43	74.00	Peak
2		5150.000	64.32	0.18	64.49	-9.51	74.00	Peak
3		5216.890	66.64	43.05	109.68	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

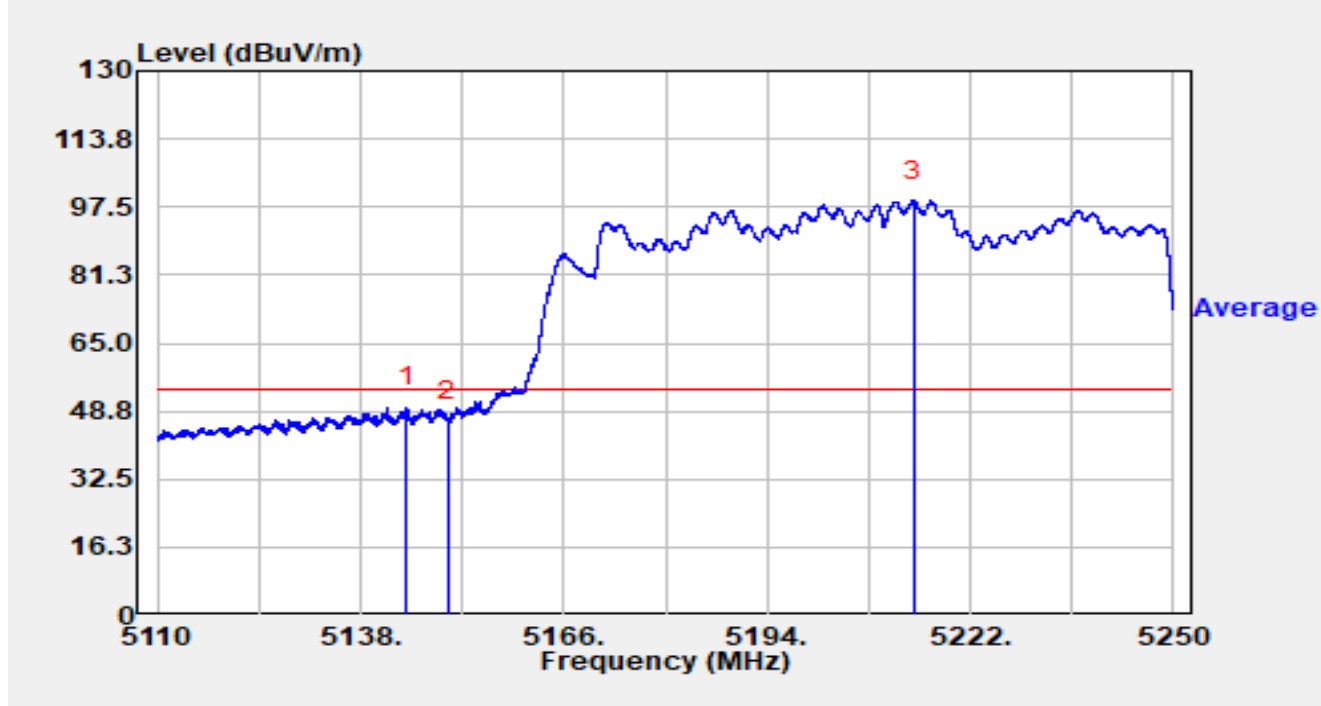


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.258	50.49	-0.74	49.75	-4.25	54.00	Average
2		5150.000	46.19	0.18	46.36	-7.64	54.00	Average
3		5214.202	58.84	40.24	99.08	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

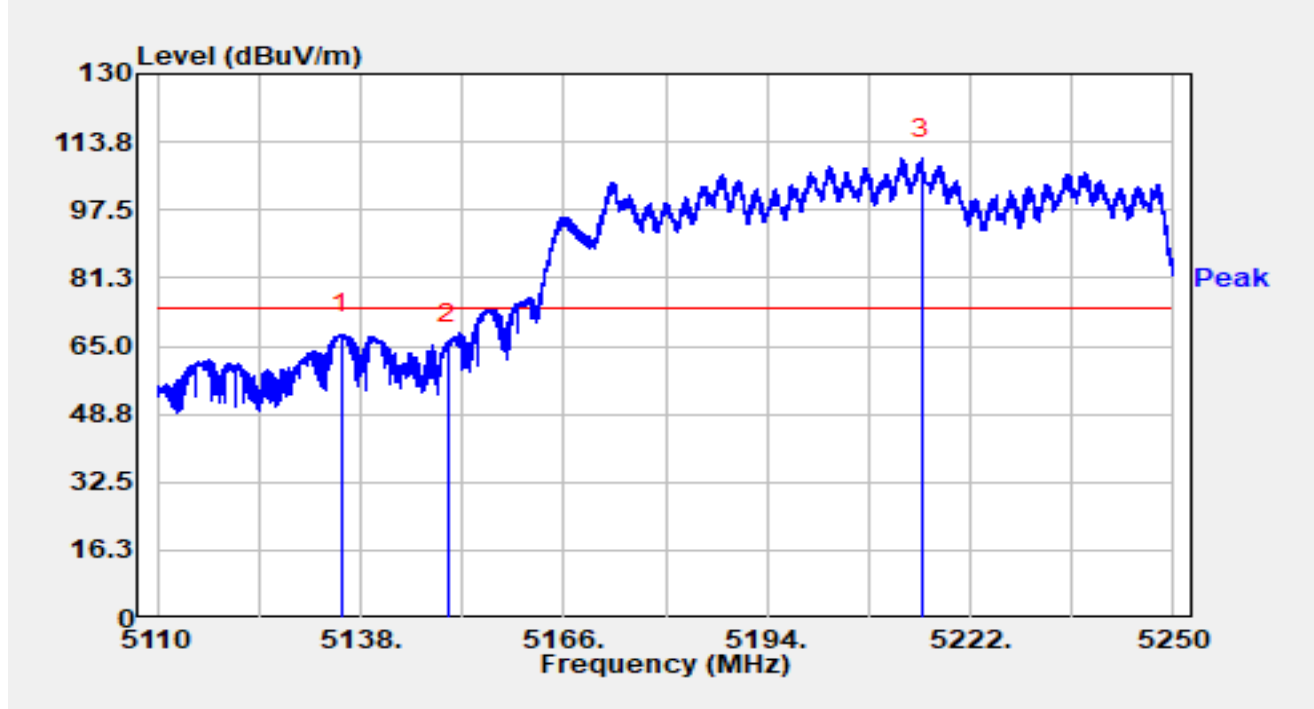


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5135.298	69.40	-1.70	67.70	-6.30	74.00	Peak
2		5150.000	65.43	0.18	65.60	-8.40	74.00	Peak
3		5215.308	68.71	41.09	109.80	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

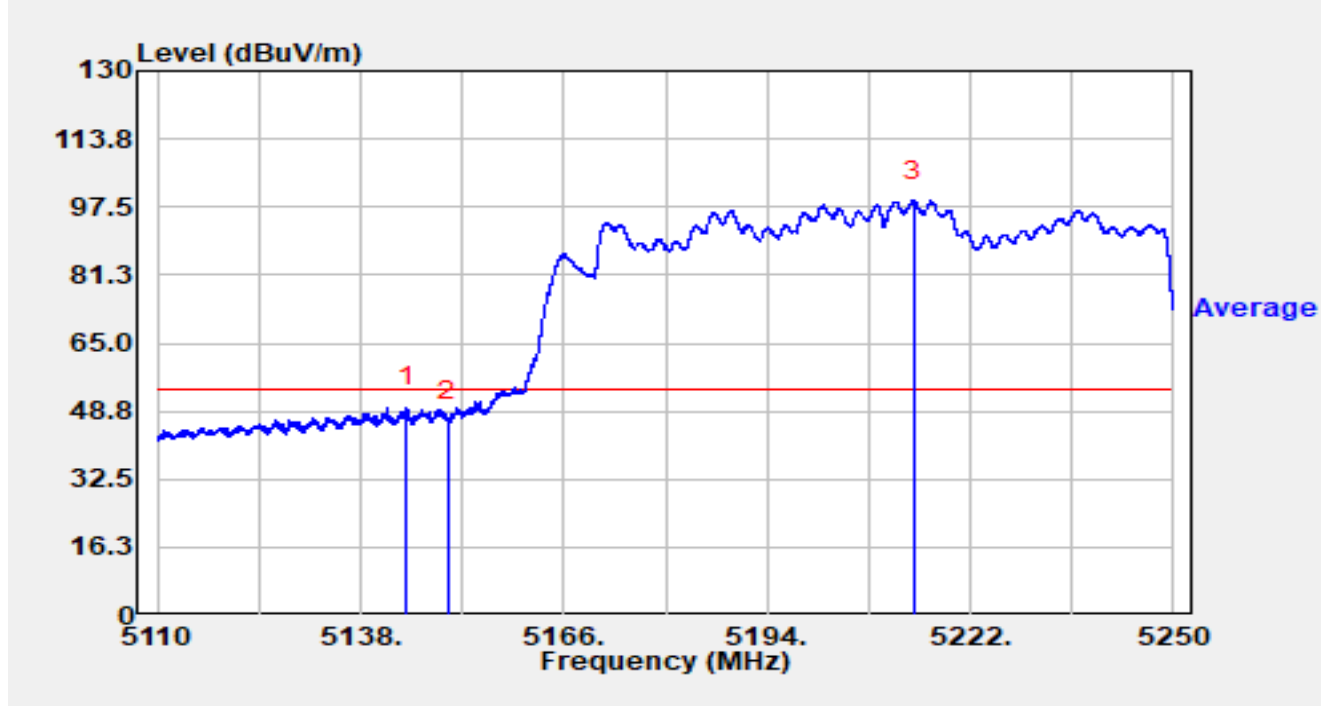


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.258	50.49	-0.74	49.75	-4.25	54.00	Average
2		5150.000	46.19	0.18	46.36	-7.64	54.00	Average
3		5214.202	58.84	40.24	99.08	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

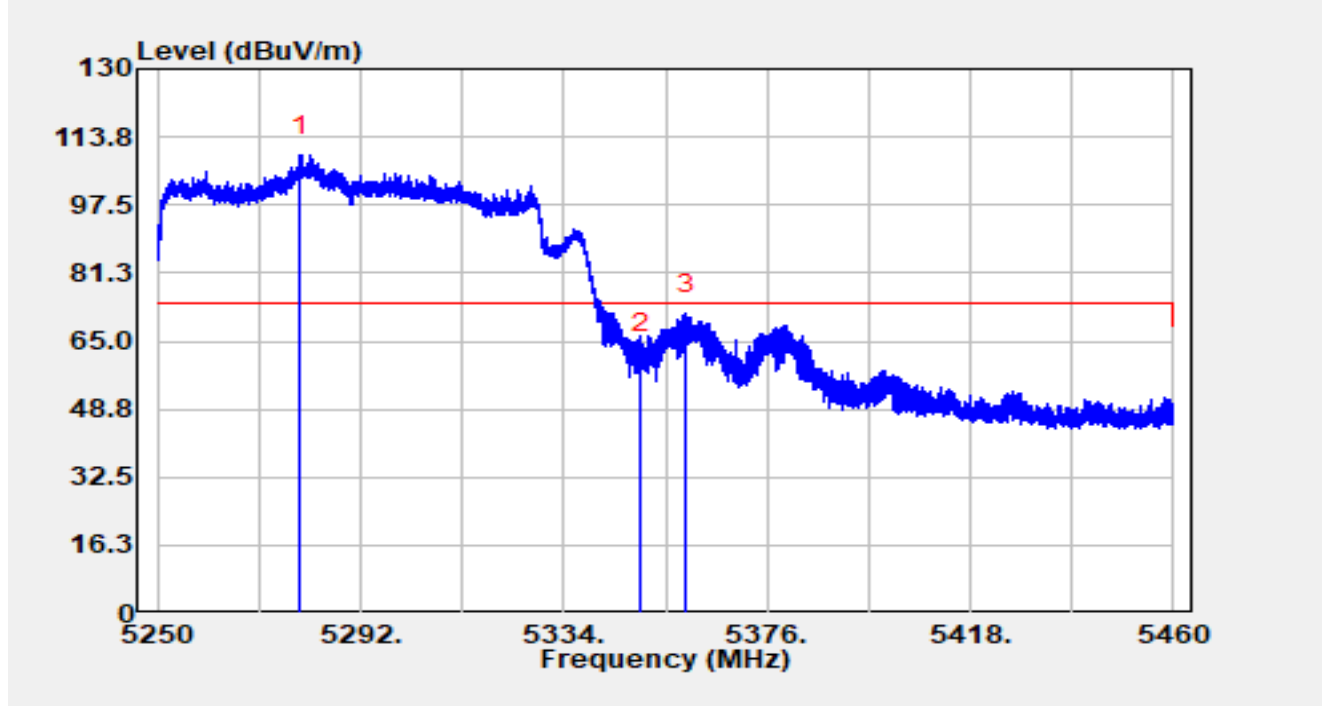


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5279.568	64.07	45.24	109.31	N/A	N/A	Peak
2		5350.000	62.21	-0.36	61.85	-12.15	74.00	Peak
3	*	5359.284	74.57	-3.05	71.51	-2.49	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

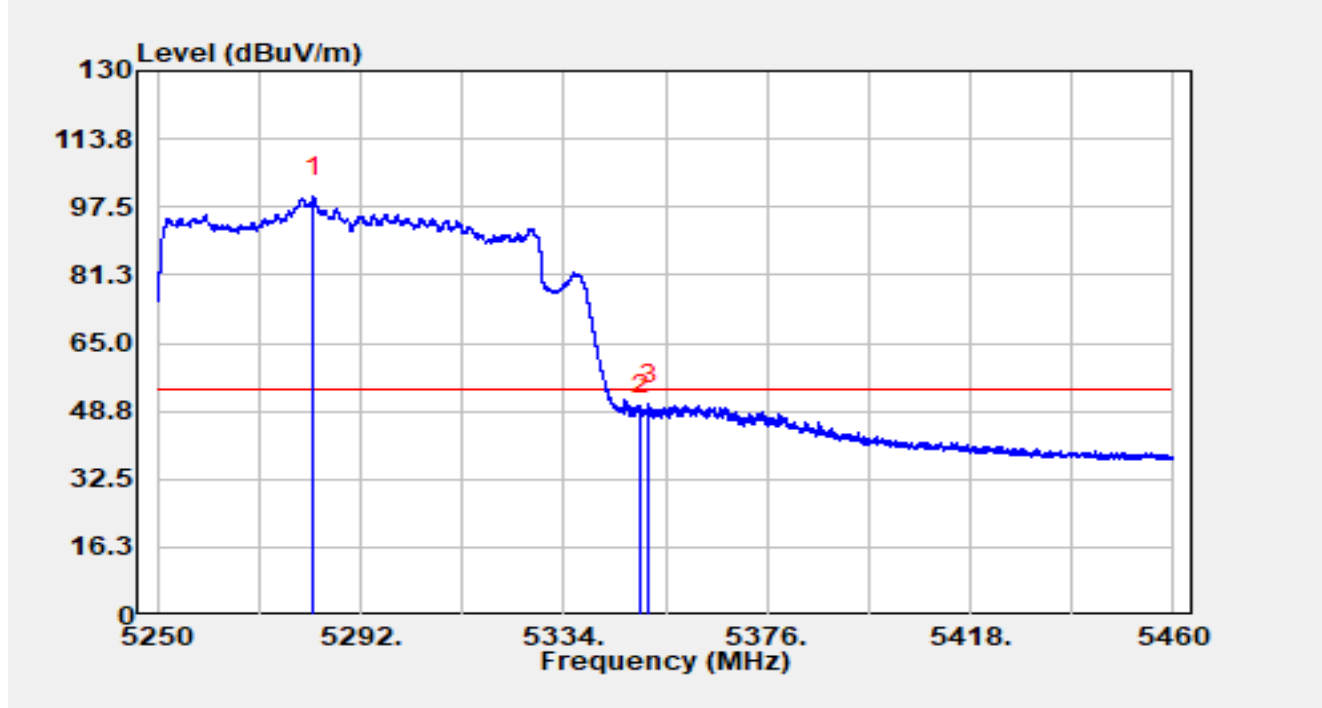


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5282.361	50.83	49.09	99.92	N/A	N/A	Average
2		5350.000	48.38	-0.36	48.02	-5.98	54.00	Average
3	*	5351.472	51.81	-1.33	50.48	-3.52	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

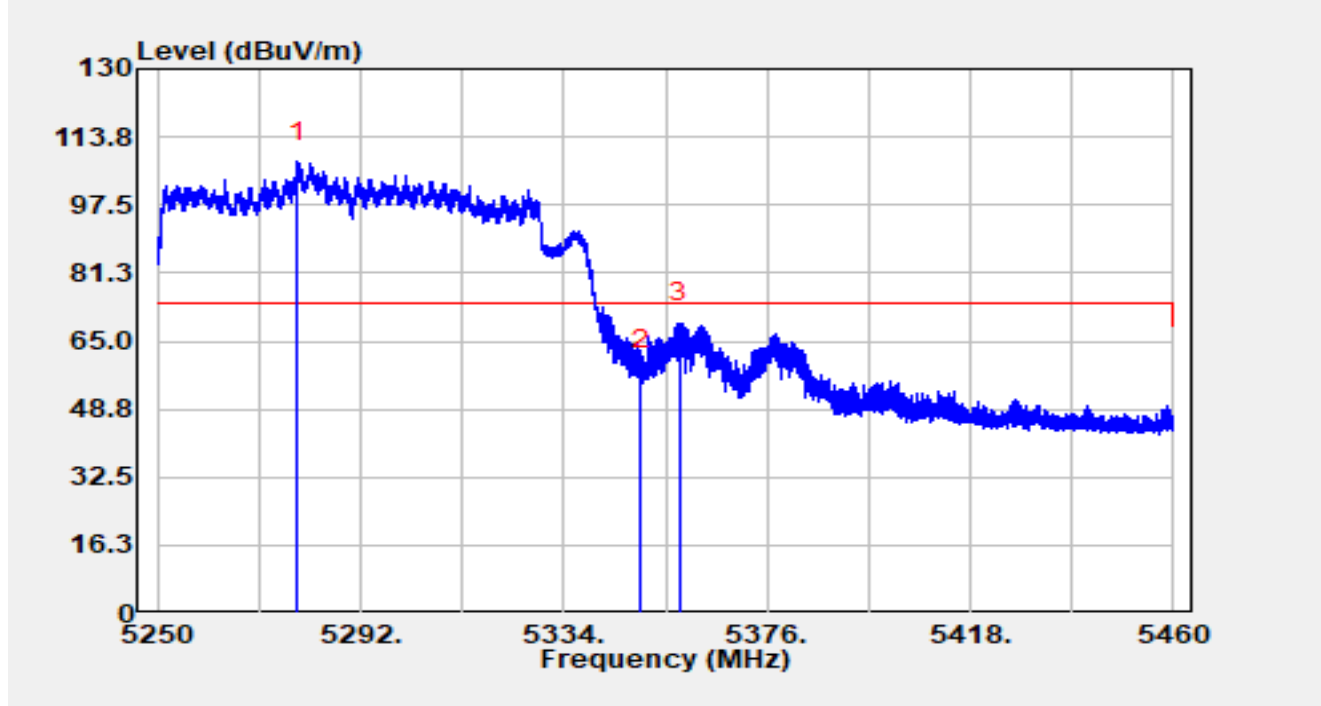


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5278.917	63.57	44.14	107.71	N/A	N/A	Peak
2		5350.000	58.57	-0.36	58.21	-15.79	74.00	Peak
3	*	5357.982	72.23	-2.90	69.33	-4.67	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

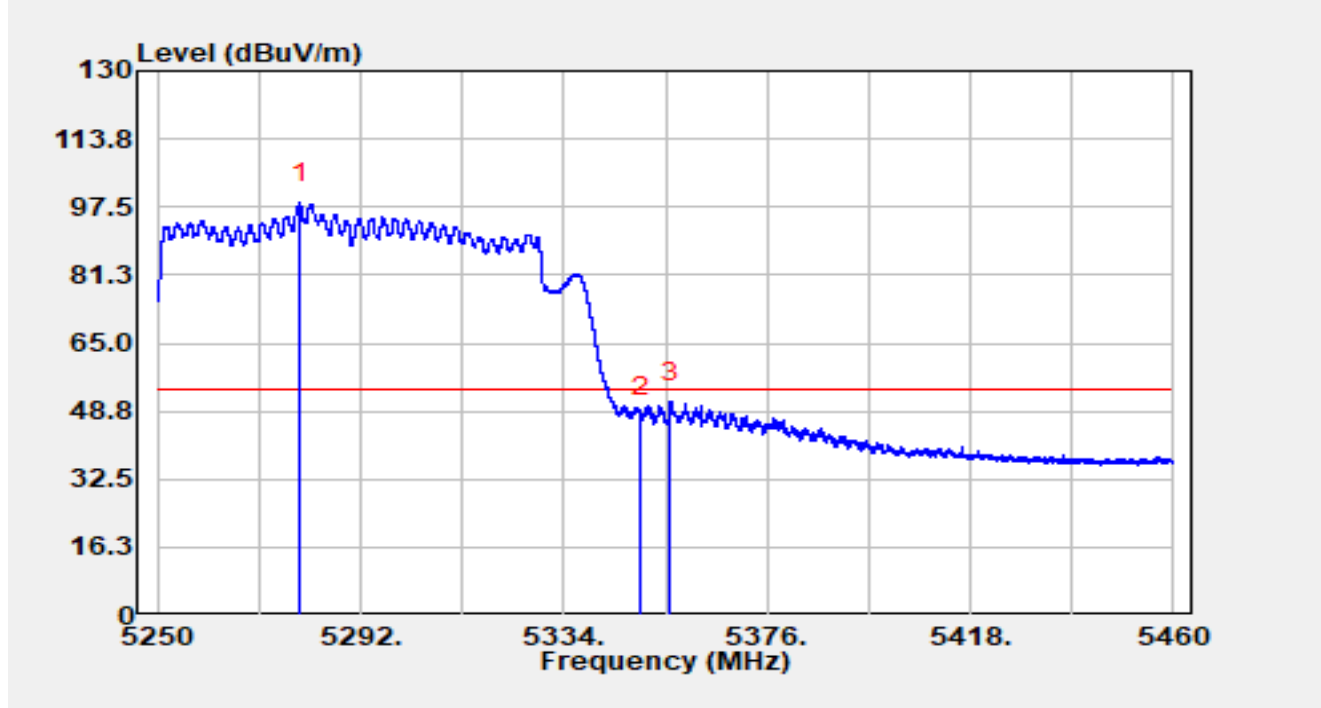


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5279.463	53.45	45.06	98.52	N/A	N/A	Average
2		5350.000	47.54	-0.36	47.18	-6.82	54.00	Average
3	*	5356.092	53.65	-2.68	50.97	-3.03	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

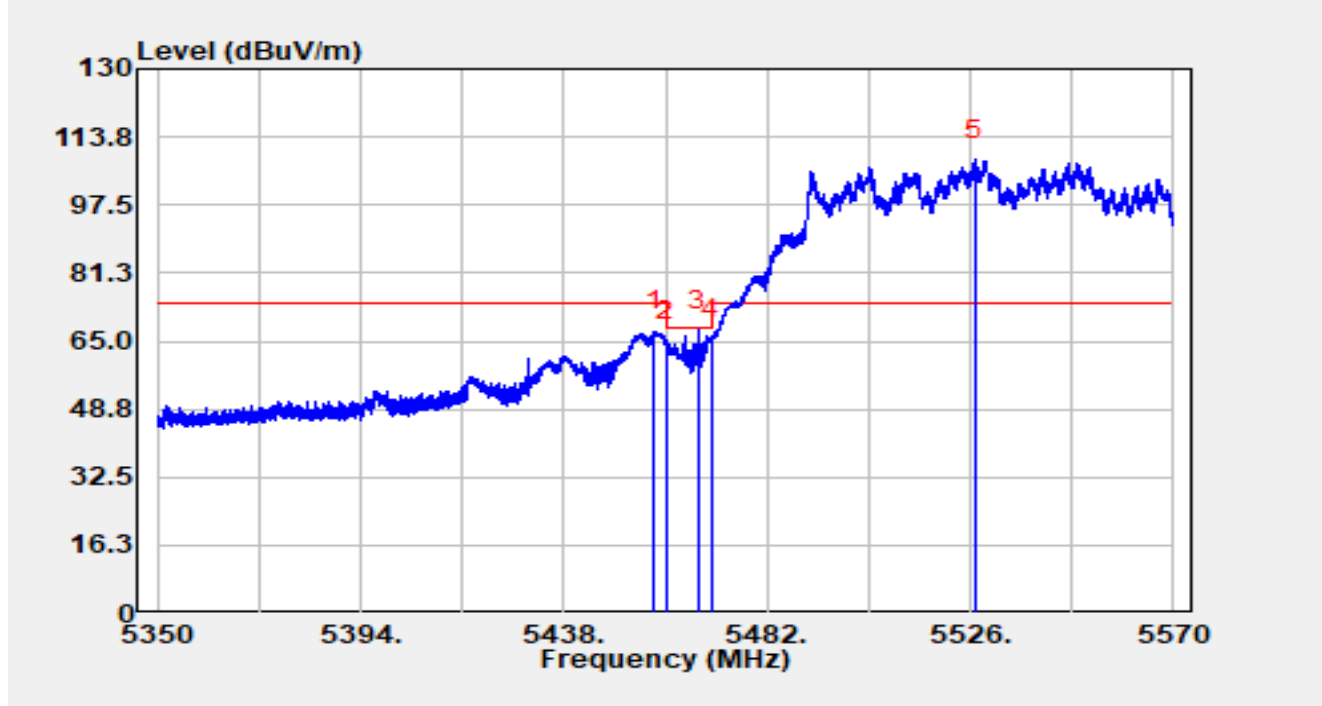


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.624	70.21	-2.80	67.41	-6.59	74.00	Peak
2		5460.000	67.70	-2.55	65.15	-3.05	68.20	Peak
3	*	5466.974	69.22	-1.68	67.54	-0.66	68.20	Peak
4		5470.000	66.38	-0.76	65.62	-2.58	68.20	Peak
5		5527.100	64.48	43.72	108.20	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

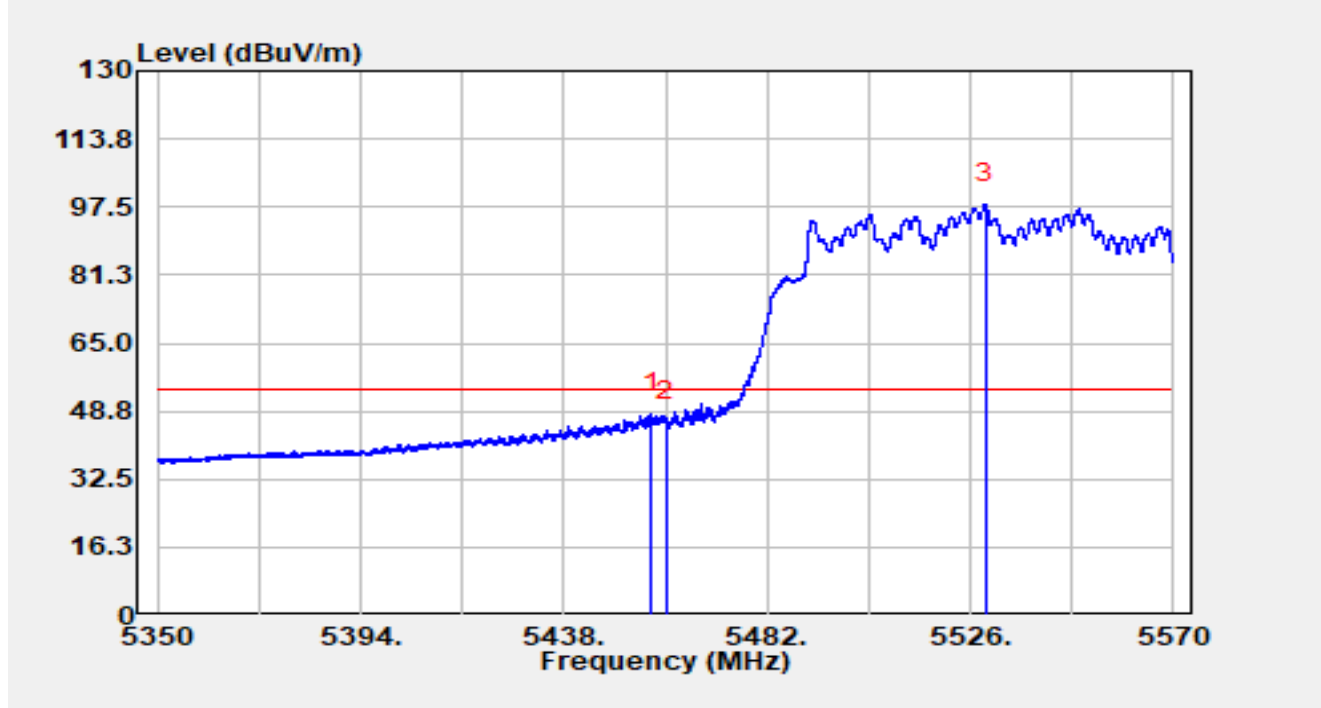


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5456.986	50.88	-2.81	48.08	-5.92	54.00	Average
2		5460.000	48.70	-2.55	46.15	-7.85	54.00	Average
3		5529.278	50.36	47.88	98.24	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

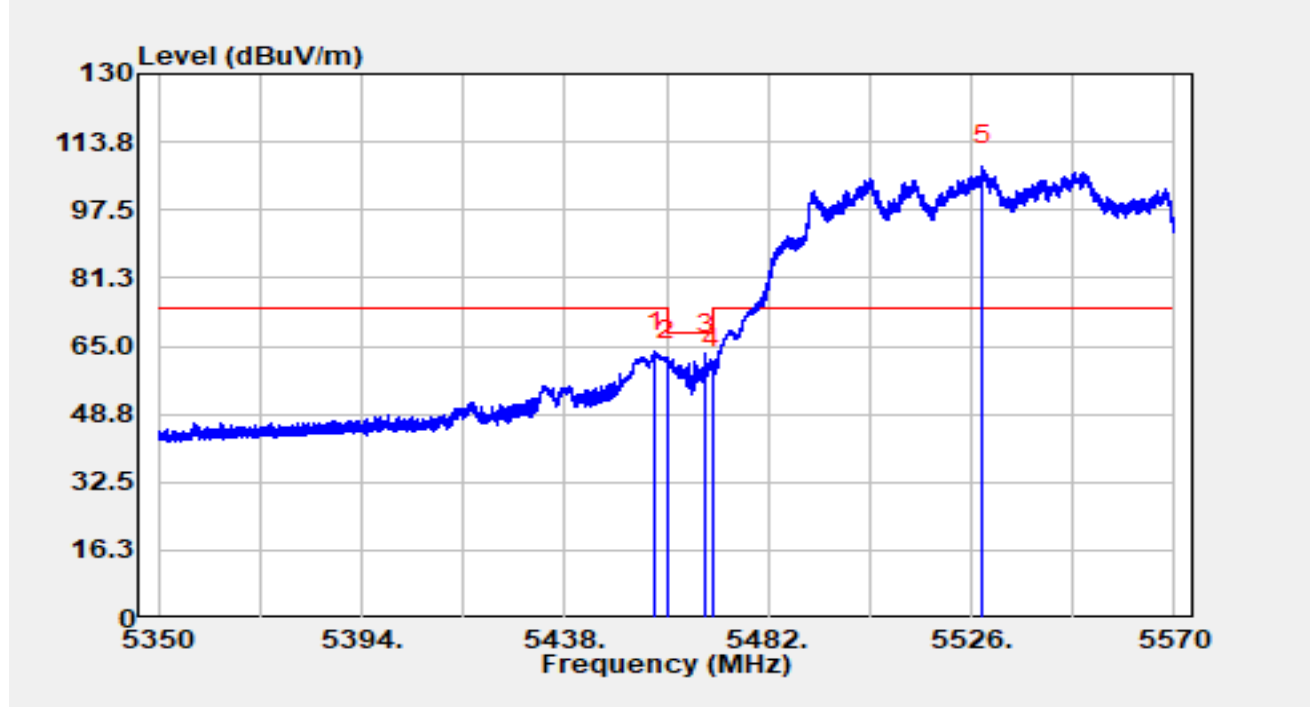


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.580	66.40	-2.80	63.60	-10.40	74.00	Peak
2		5460.000	64.34	-2.55	61.78	-6.42	68.20	Peak
3	*	5468.580	64.33	-1.24	63.09	-5.11	68.20	Peak
4		5470.000	60.13	-0.76	59.37	-8.83	68.20	Peak
5		5528.552	61.42	46.51	107.93	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

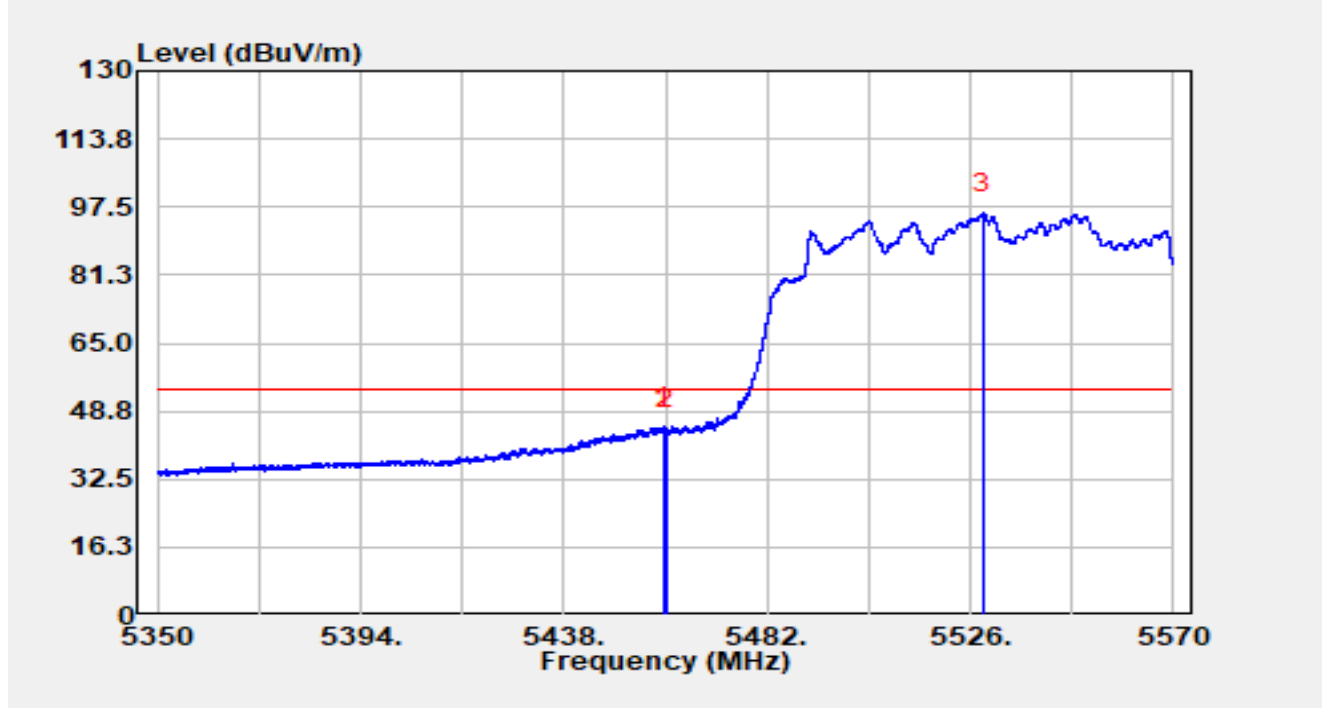


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.692	47.63	-2.60	45.03	-8.97	54.00	Average
2		5460.000	46.80	-2.55	44.25	-9.75	54.00	Average
3		5528.706	49.30	46.74	96.03	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

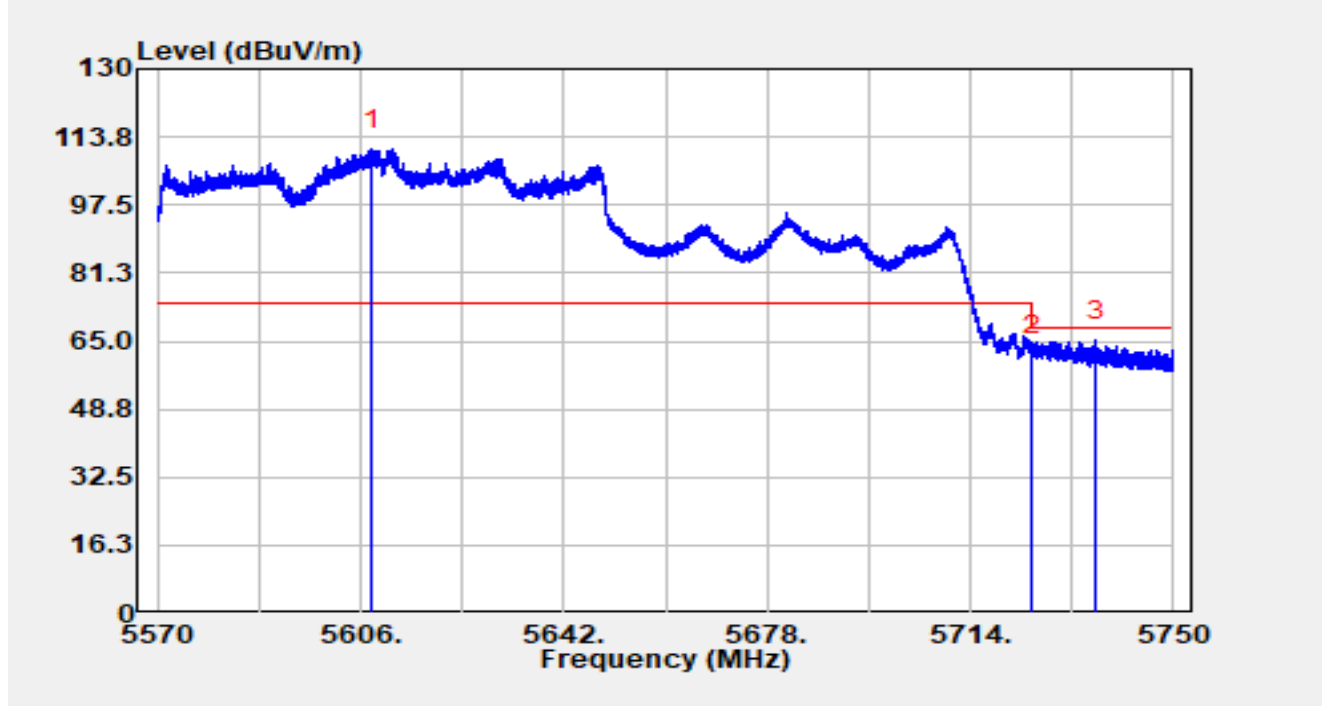


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5608.124	67.09	43.72	110.81	N/A	N/A	Peak
2		5725.000	62.57	-0.89	61.68	-6.52	68.20	Peak
3	*	5736.284	68.64	-3.42	65.23	-2.97	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

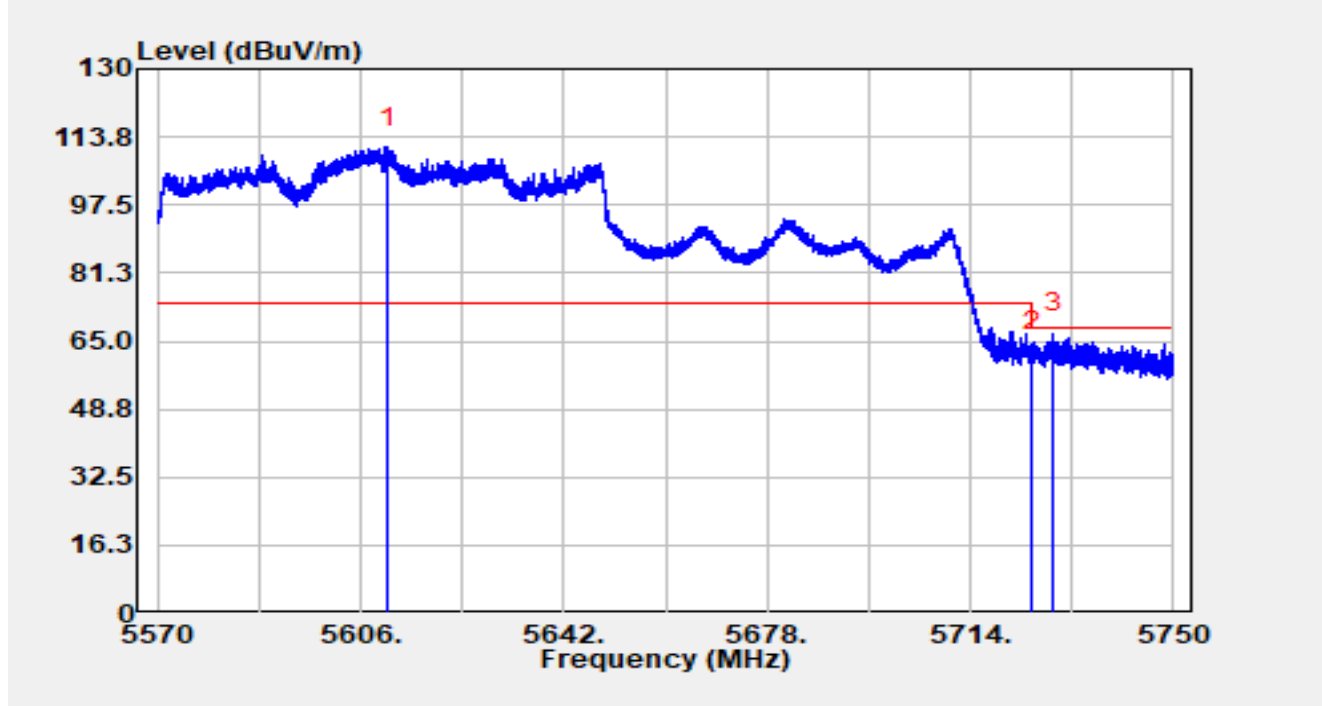


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5610.878	62.78	48.41	111.19	N/A	N/A	Peak
2		5725.000	63.44	-0.89	62.55	-5.65	68.20	Peak
3	*	5728.796	69.29	-2.39	66.90	-1.30	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC Part15E_5.8G Band4	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

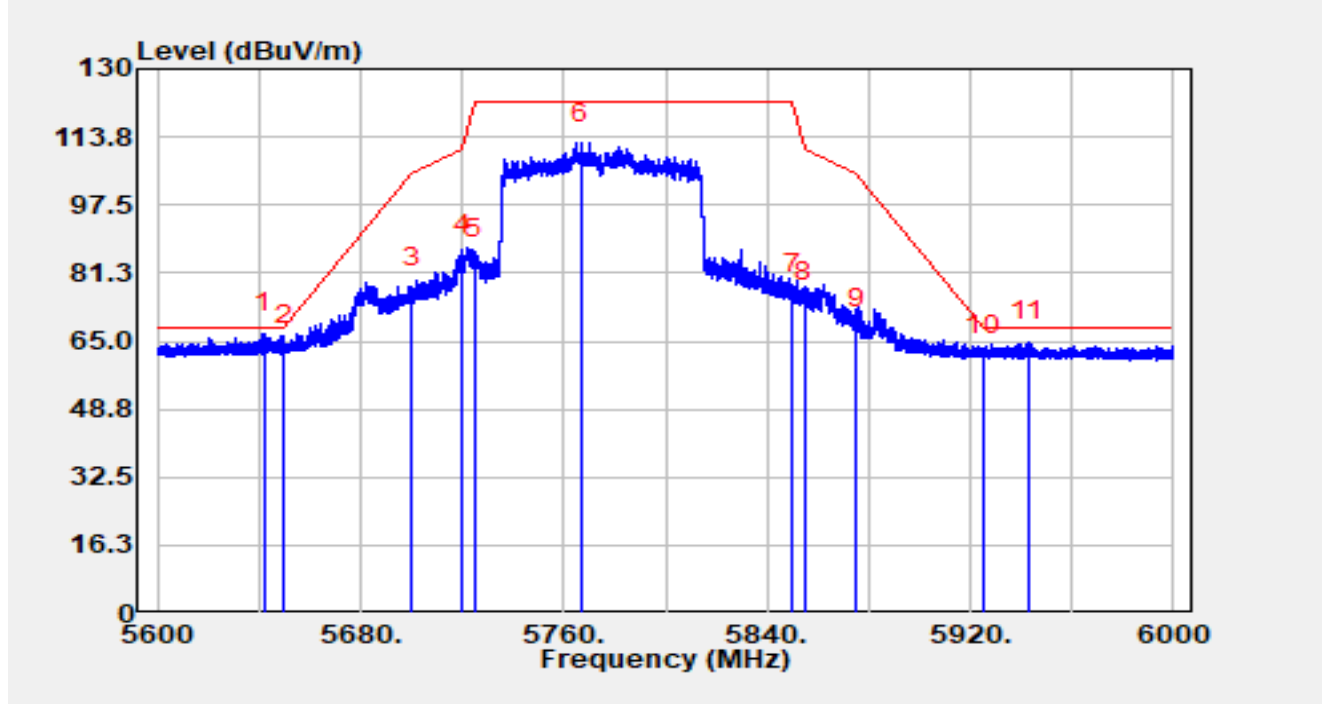

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.240	72.30	-5.43	66.87	-1.33	68.20	Peak
2		5650.000	69.51	-5.42	64.09	-4.11	68.20	Peak
3		5700.000	83.20	-5.43	77.77	-27.43	105.20	Peak
4		5720.000	90.85	-5.37	85.48	-25.32	110.80	Peak
5		5725.000	90.02	-5.37	84.65	-37.55	122.20	Peak
6		5766.920	117.81	-5.61	112.21	N/A	N/A	Peak
7		5850.000	81.82	-5.64	76.19	-46.01	122.20	Peak
8		5855.000	80.10	-5.69	74.41	-36.39	110.80	Peak
9		5875.000	73.67	-5.74	67.93	-37.27	105.20	Peak
10		5925.000	67.31	-5.59	61.72	-6.48	68.20	Peak
11		5942.760	70.42	-5.66	64.76	-3.44	68.20	Peak


Notes:

1. " *" indicates the worst-case emission level observed during the measurement.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC Part15E_5.8G Band4	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

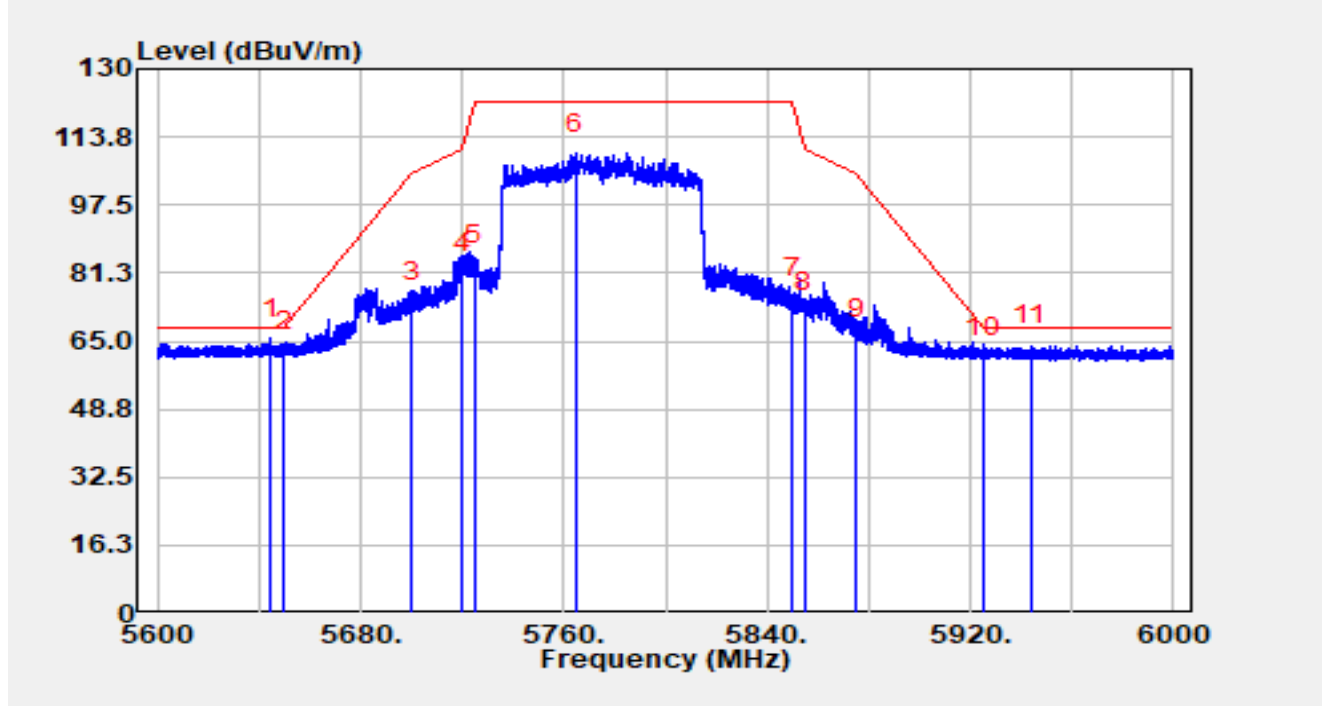


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.720	70.96	-5.43	65.53	-2.67	68.20	Peak
2		5650.000	67.99	-5.42	62.57	-5.63	68.20	Peak
3		5700.000	79.52	-5.43	74.09	-31.11	105.20	Peak
4		5720.000	86.54	-5.37	81.17	-29.63	110.80	Peak
5		5725.000	88.34	-5.37	82.97	-39.23	122.20	Peak
6		5764.720	115.49	-5.61	109.88	N/A	N/A	Peak
7		5850.000	80.81	-5.64	75.17	-47.03	122.20	Peak
8		5855.000	77.35	-5.69	71.66	-39.14	110.80	Peak
9		5875.000	71.15	-5.74	65.41	-39.79	105.20	Peak
10		5925.000	66.69	-5.59	61.10	-7.10	68.20	Peak
11		5943.680	69.48	-5.67	63.82	-4.38	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.

2. $C.F \text{ (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 16\text{dB Attenuation (dB)} - \text{AMP (dB)}$.
3. $\text{Measurement (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + C.F \text{ (dB/m)}$.

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

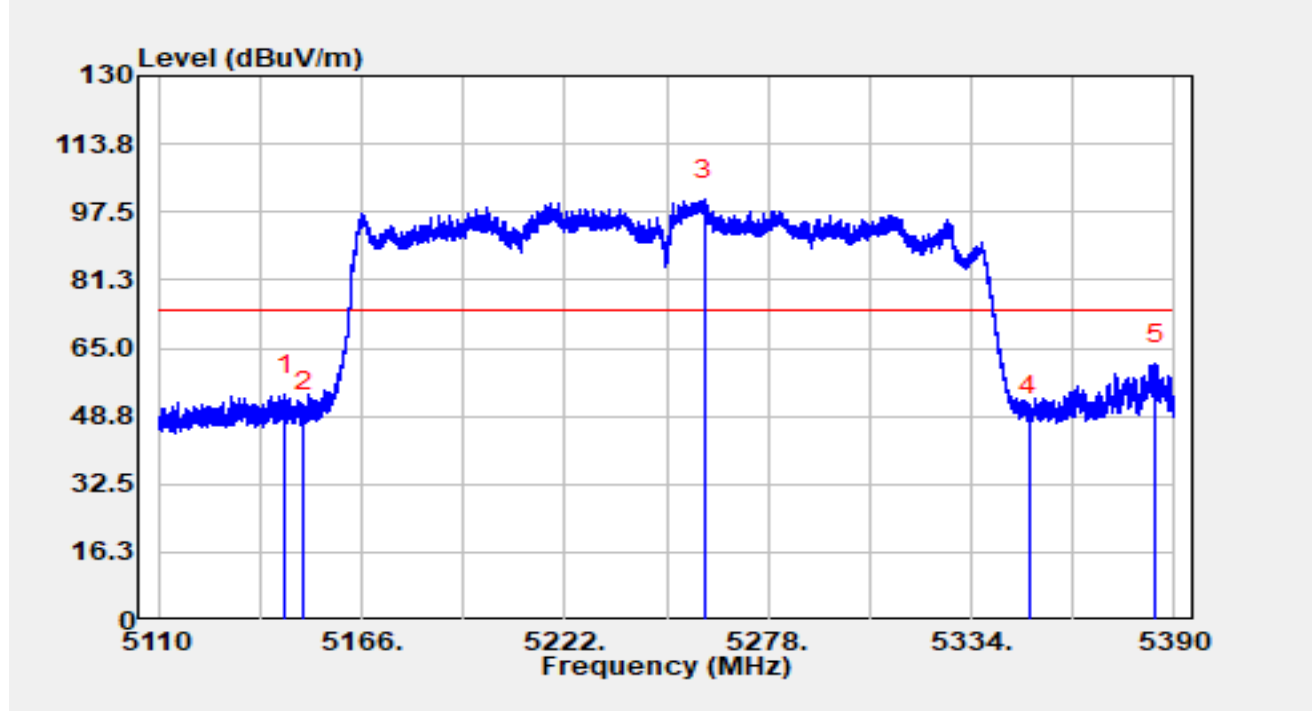


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5145.028	56.87	-3.03	53.84	-20.16	74.00	Peak
2		5150.000	51.92	-2.21	49.71	-24.29	74.00	Peak
3		5260.332	53.17	47.29	100.46	N/A	N/A	Peak
4		5350.000	50.37	-1.38	48.99	-25.01	74.00	Peak
5	*	5384.792	65.34	-4.21	61.13	-12.87	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

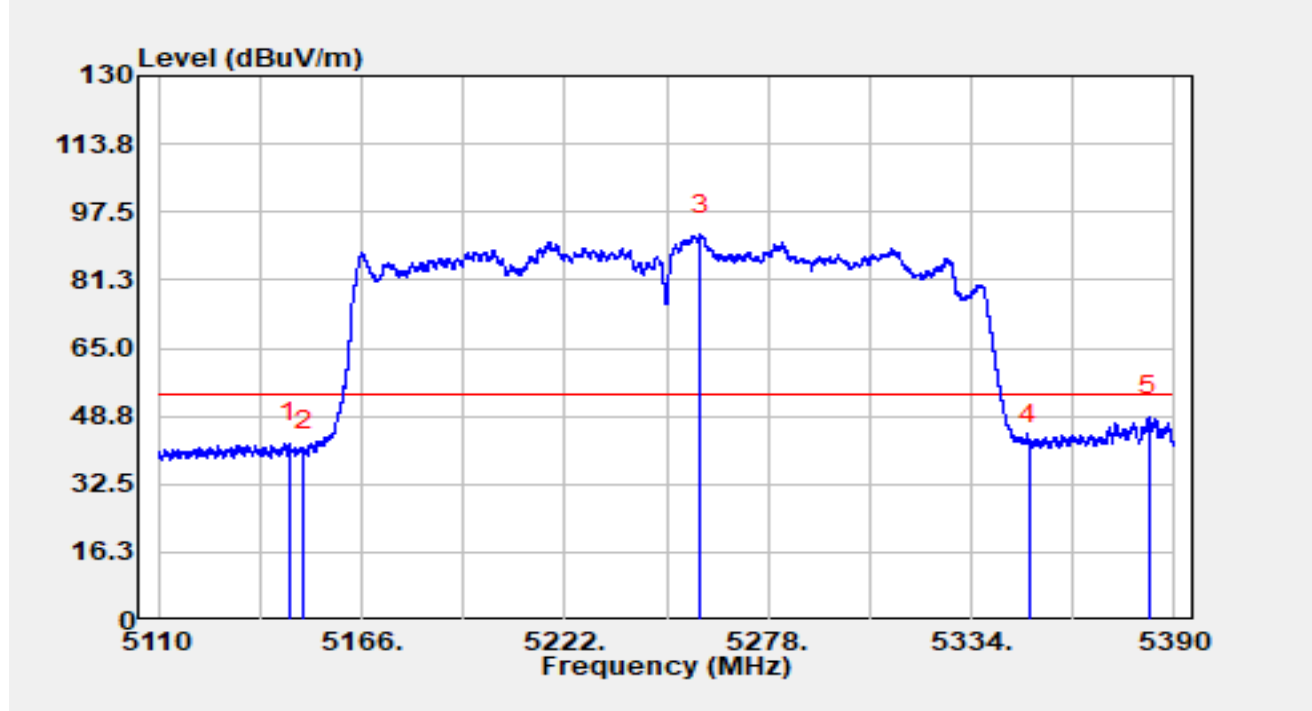


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5146.036	45.15	-2.90	42.25	-11.75	54.00	Average
2		5150.000	42.77	-2.21	40.56	-13.44	54.00	Average
3		5259.408	45.67	46.46	92.12	N/A	N/A	Average
4		5350.000	43.37	-1.38	41.99	-12.01	54.00	Average
5	*	5382.916	52.88	-4.22	48.67	-5.33	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

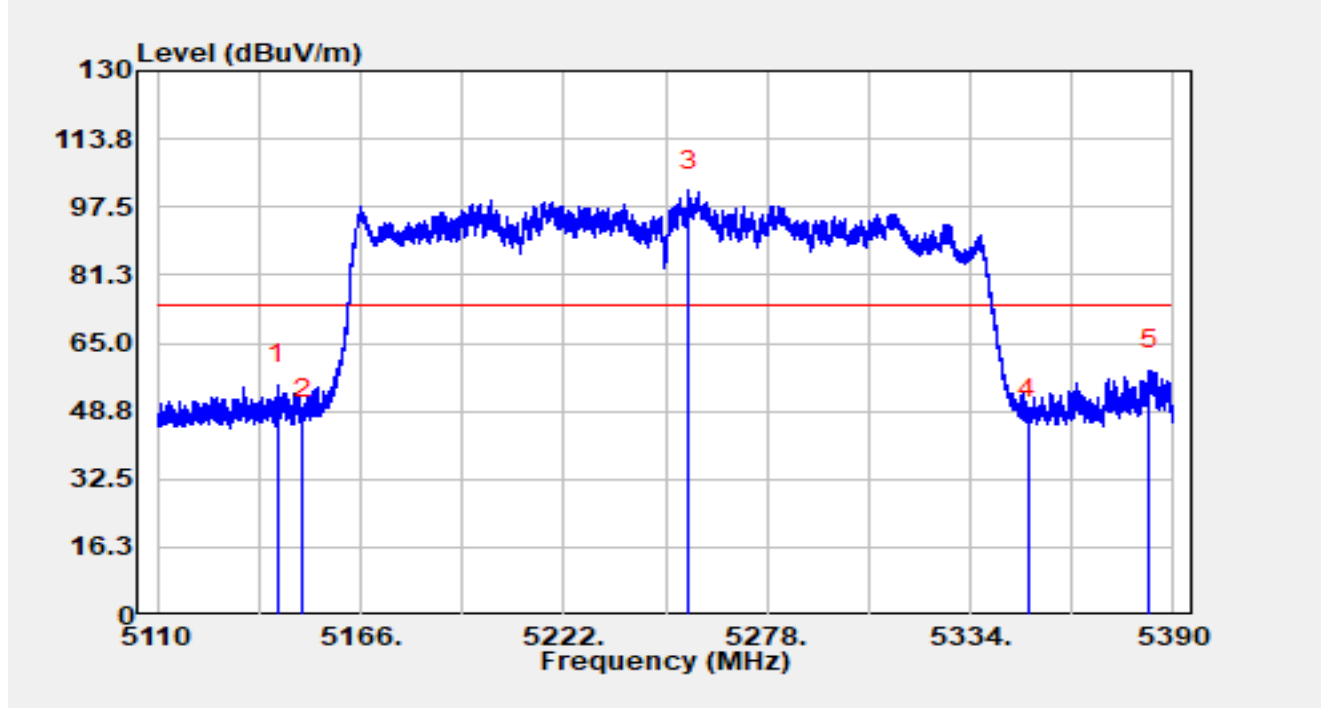


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5143.096	58.34	-3.19	55.15	-18.85	74.00	Peak
2		5150.000	48.88	-2.21	46.67	-27.33	74.00	Peak
3		5256.524	59.82	41.54	101.36	N/A	N/A	Peak
4		5350.000	48.36	-1.38	46.98	-27.02	74.00	Peak
5	*	5383.308	62.76	-4.20	58.55	-15.45	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

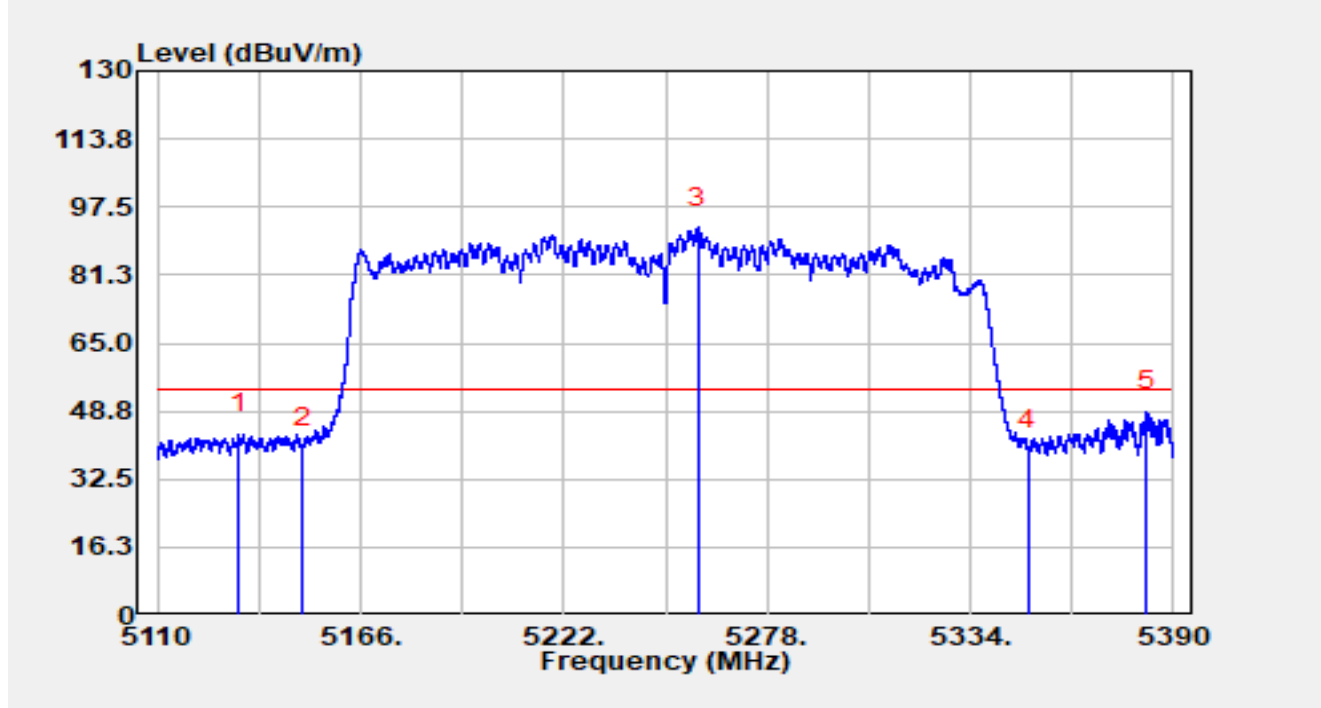


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5132.428	47.12	-3.80	43.32	-10.68	54.00	Average
2		5150.000	42.13	-2.21	39.92	-14.08	54.00	Average
3		5258.960	46.80	45.72	92.52	N/A	N/A	Average
4		5350.000	40.77	-1.38	39.39	-14.61	54.00	Average
5	*	5382.664	52.94	-4.20	48.74	-5.26	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

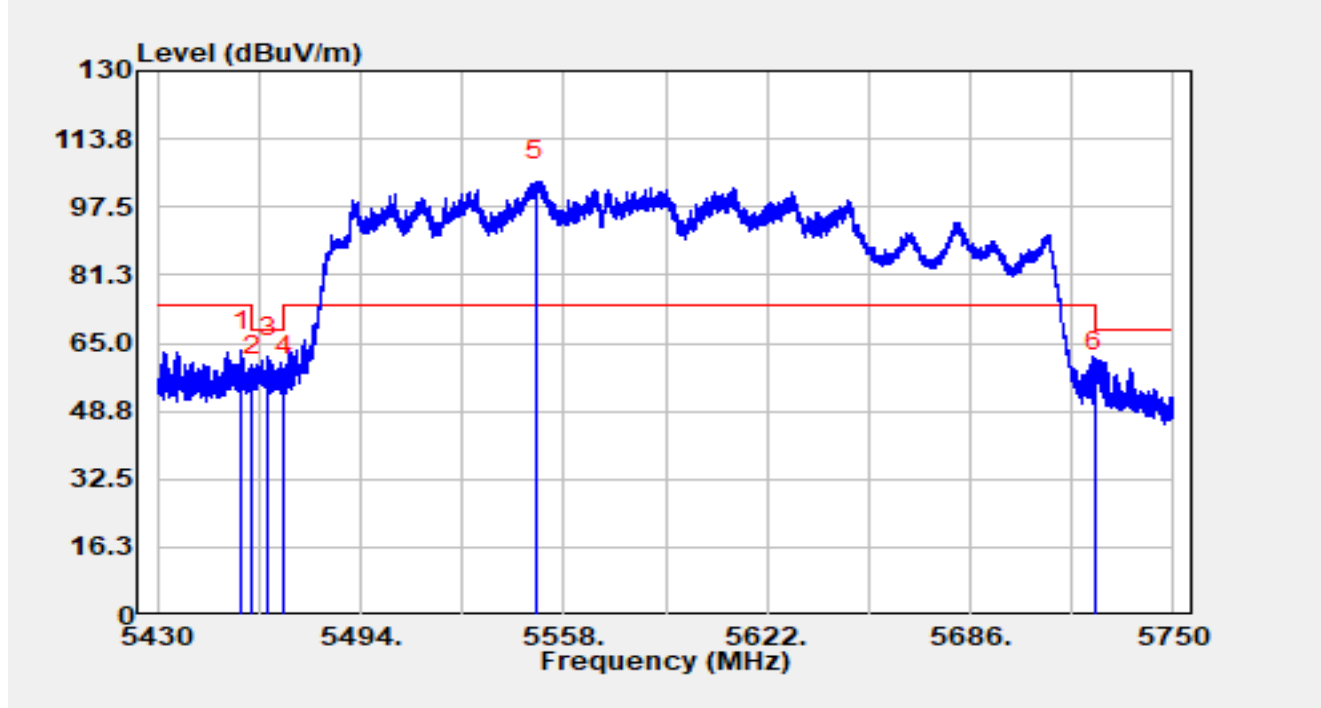


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.560	66.14	-2.86	63.28	-10.72	74.00	Peak
2		5460.000	59.85	-2.55	57.29	-10.91	68.20	Peak
3	*	5464.848	63.85	-2.09	61.76	-6.44	68.20	Peak
4		5470.000	57.69	-0.76	56.94	-11.26	68.20	Peak
5		5549.328	58.99	44.76	103.75	N/A	N/A	Peak
6		5725.000	58.93	-0.89	58.04	-10.16	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

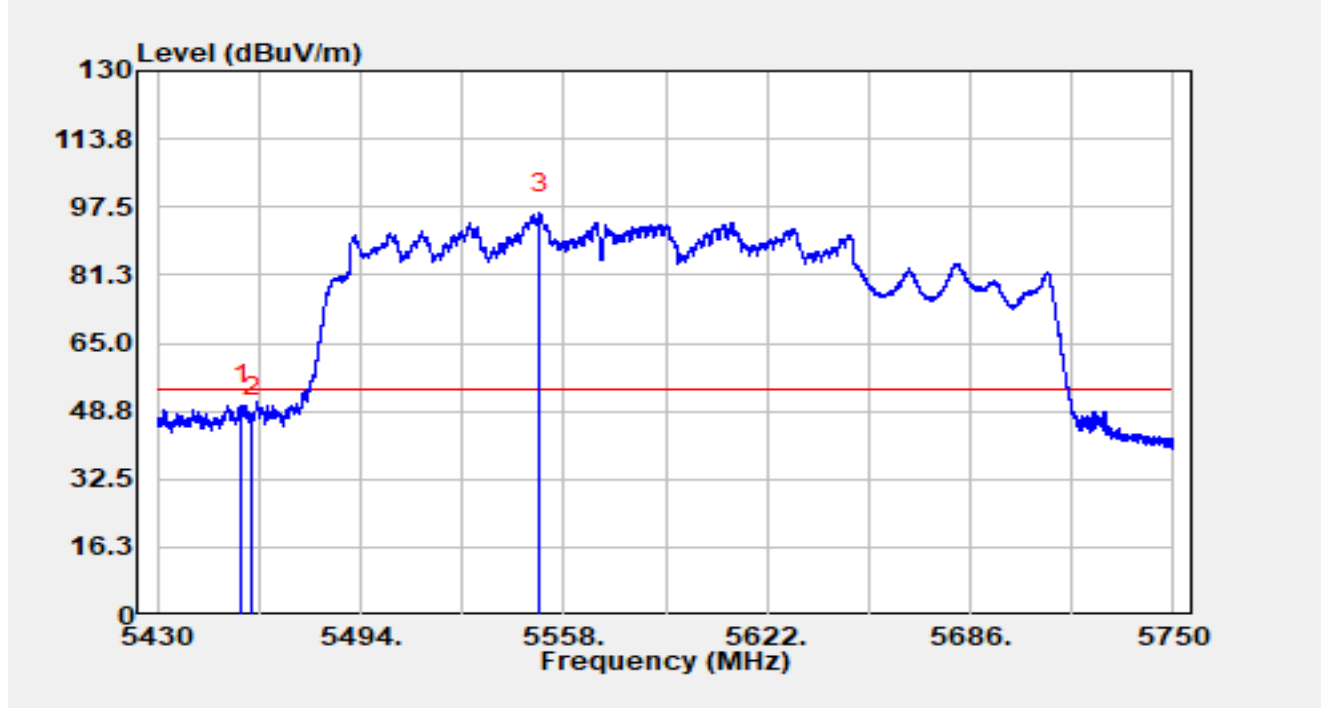


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.304	53.08	-2.89	50.19	-3.81	54.00	Average
2		5460.000	50.12	-2.55	47.56	-6.44	54.00	Average
3		5550.480	49.74	46.37	96.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

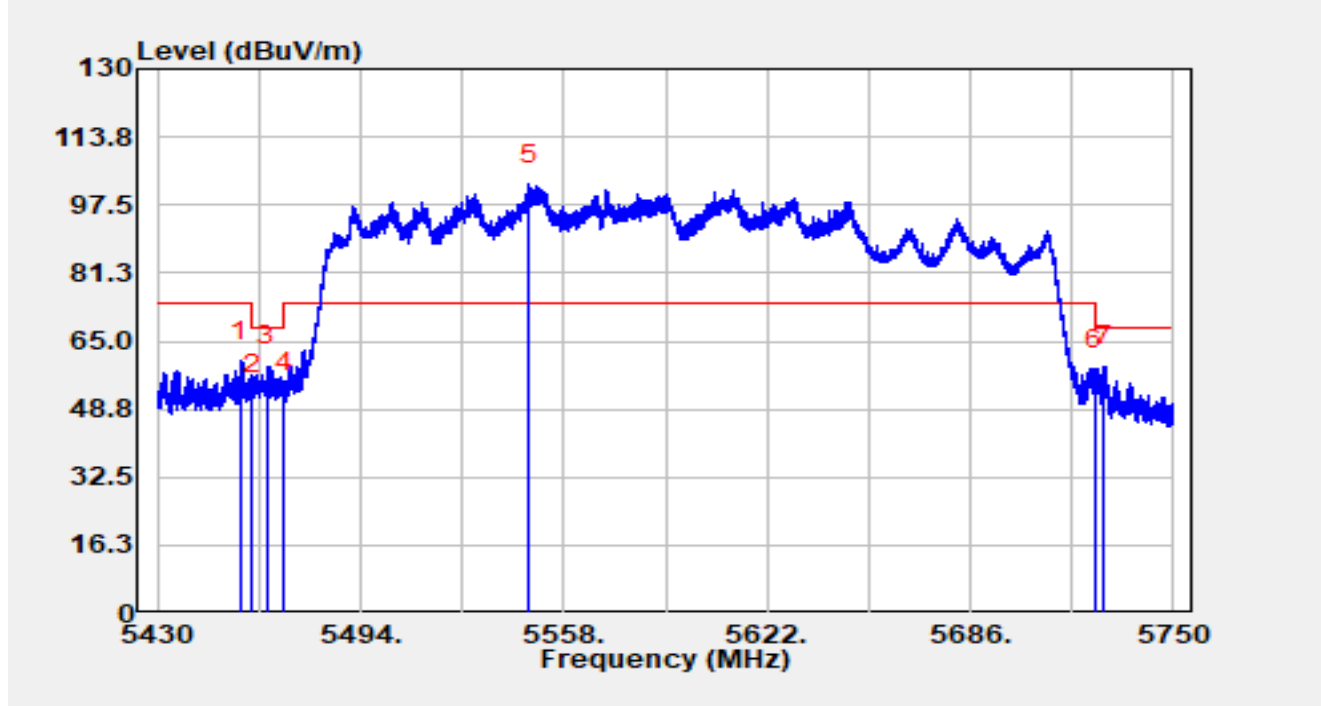


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.272	63.01	-2.89	60.13	-13.87	74.00	Peak
2		5460.000	54.59	-2.55	52.04	-16.16	68.20	Peak
3	*	5464.624	61.16	-2.12	59.04	-9.16	68.20	Peak
4		5470.000	53.64	-0.76	52.88	-15.32	68.20	Peak
5		5546.832	60.47	41.87	102.34	N/A	N/A	Peak
6		5725.000	58.93	-0.89	58.03	-10.17	68.20	Peak
7		5728.304	61.29	-2.26	59.03	-9.17	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

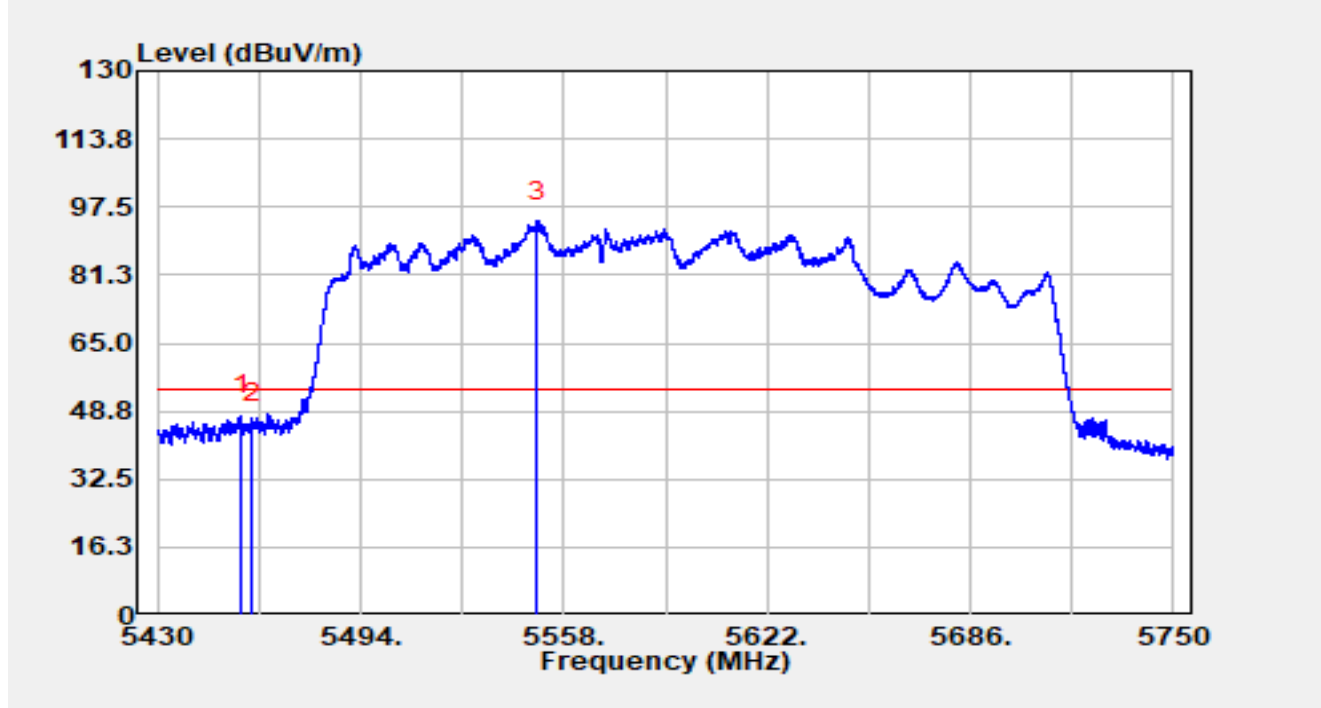


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.400	50.67	-2.89	47.78	-6.22	54.00	Average
2		5460.000	48.64	-2.55	46.09	-7.91	54.00	Average
3		5549.712	48.77	45.35	94.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

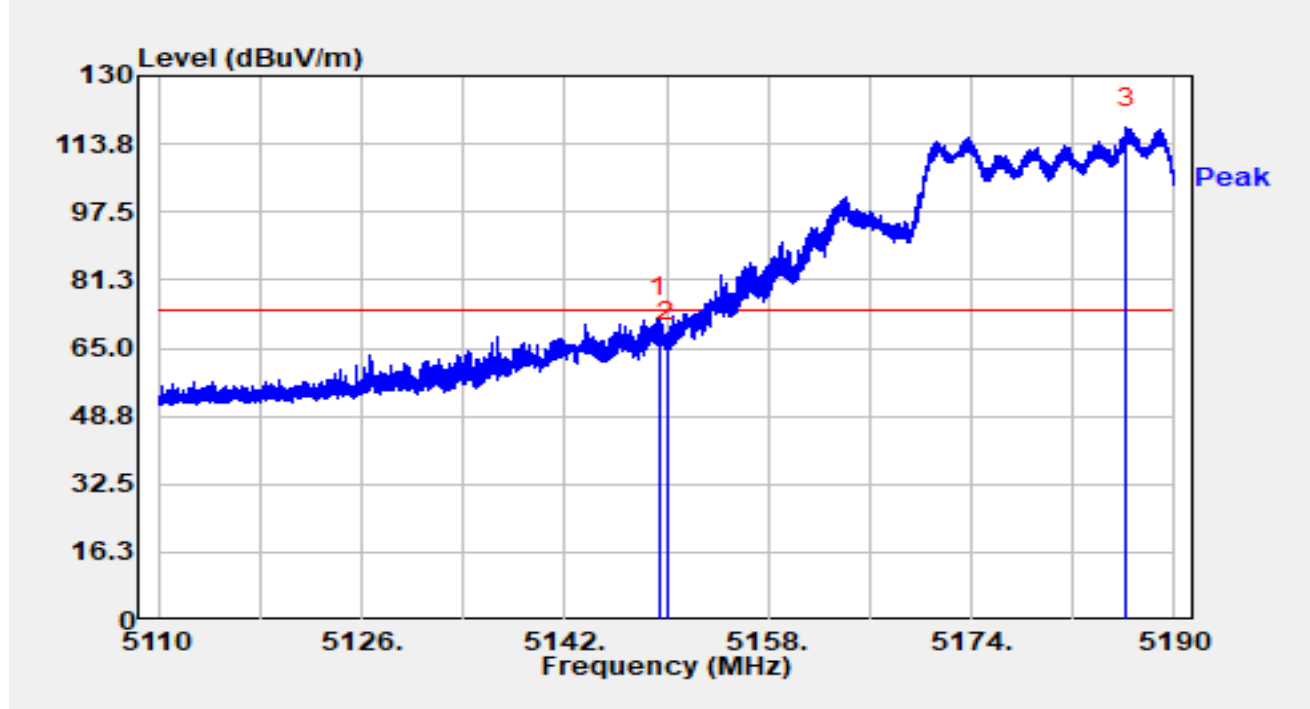


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.384	72.36	0.06	72.42	-1.58	74.00	Peak
2		5150.000	66.41	0.18	66.59	-7.41	74.00	Peak
3		5186.240	78.98	38.52	117.50	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

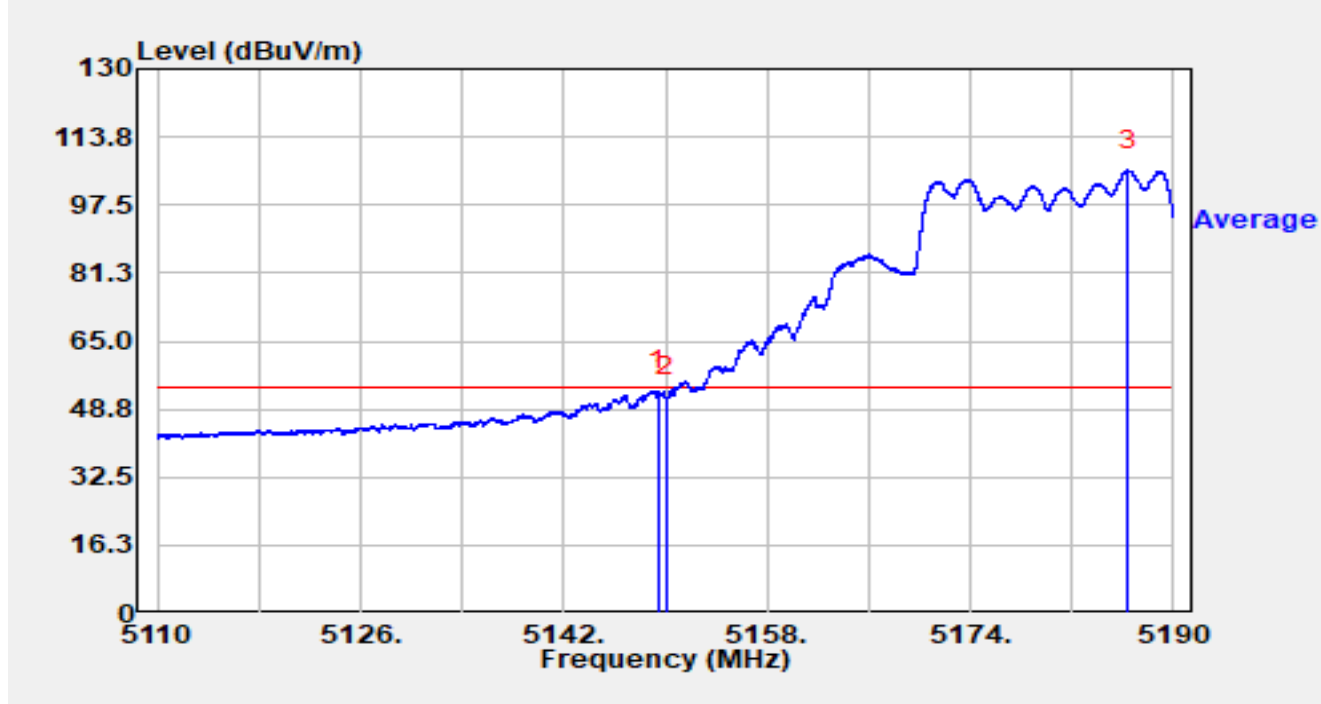


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.472	53.06	0.08	53.14	-0.86	54.00	Average
2		5150.000	51.36	0.18	51.54	-2.46	54.00	Average
3		5186.368	67.15	38.61	105.76	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

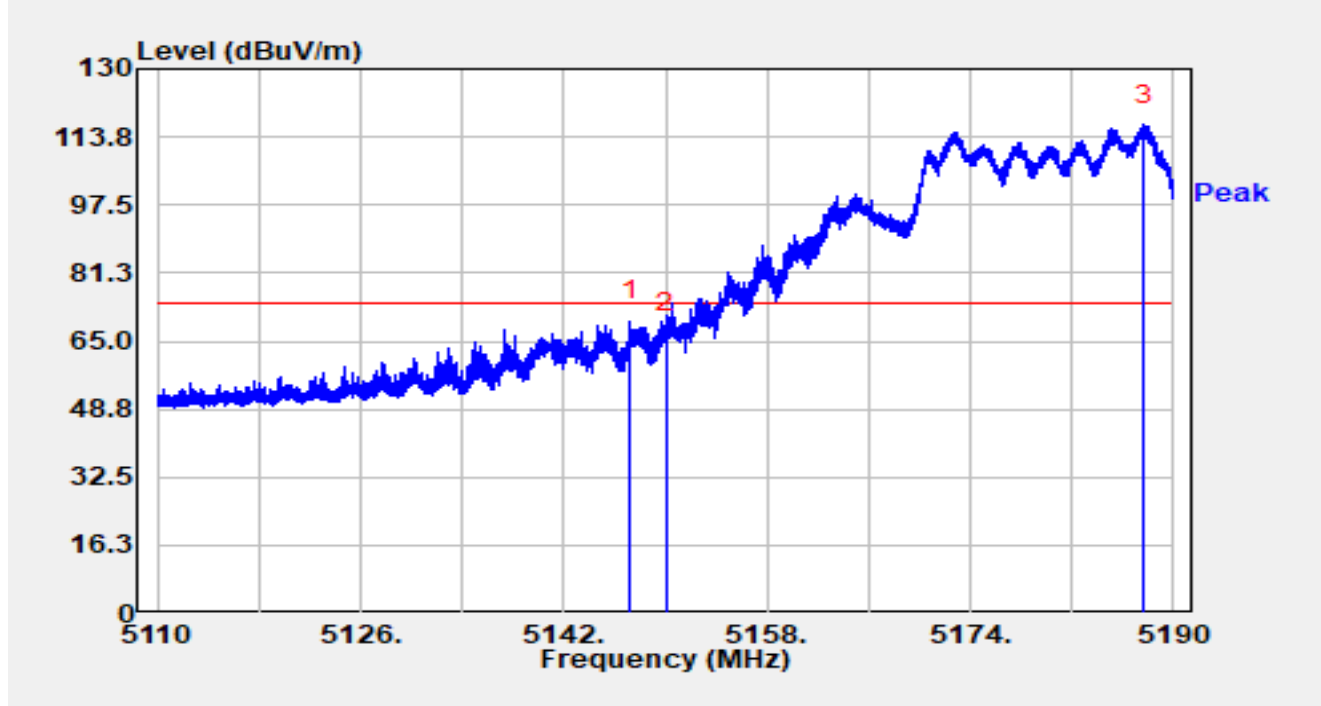


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.240	70.11	-0.28	69.84	-4.16	74.00	Peak
2		5150.000	67.00	0.18	67.18	-6.82	74.00	Peak
3		5187.680	76.84	39.90	116.75	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

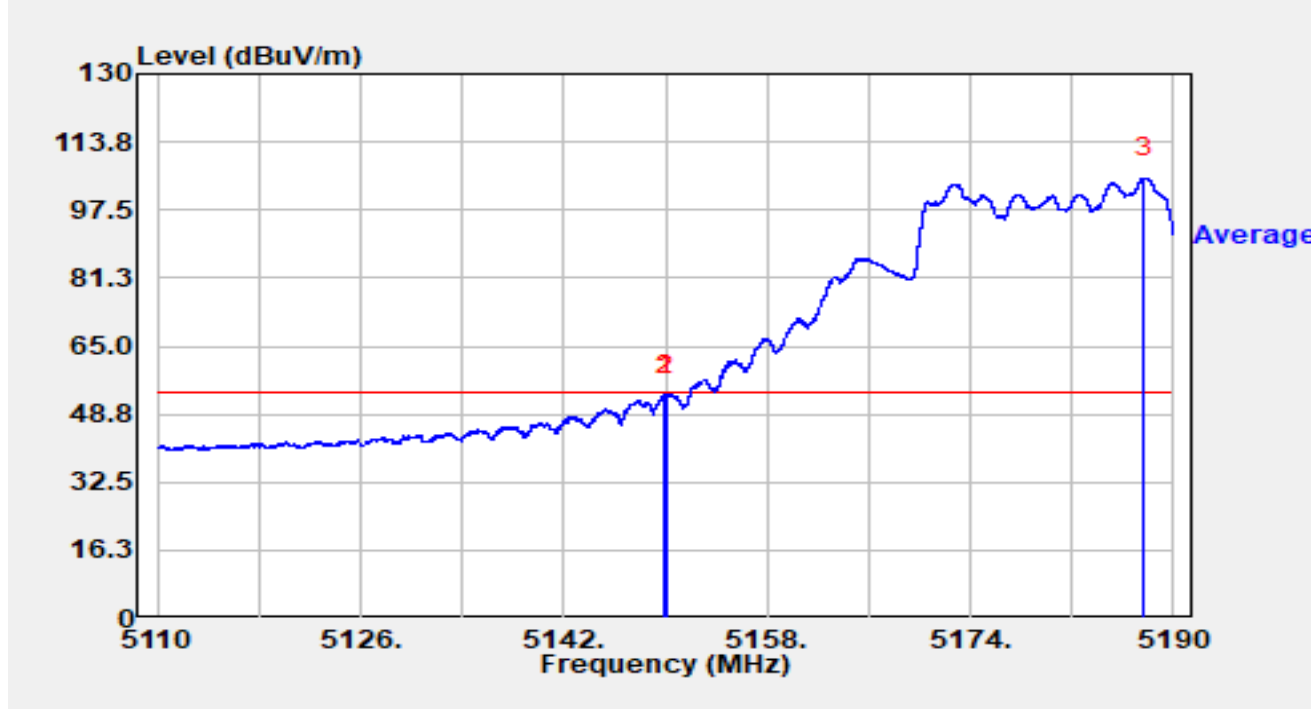


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.960	53.07	0.17	53.24	-0.76	54.00	Average
2		5150.000	53.05	0.18	53.23	-0.77	54.00	Average
3		5187.720	65.15	39.97	105.11	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

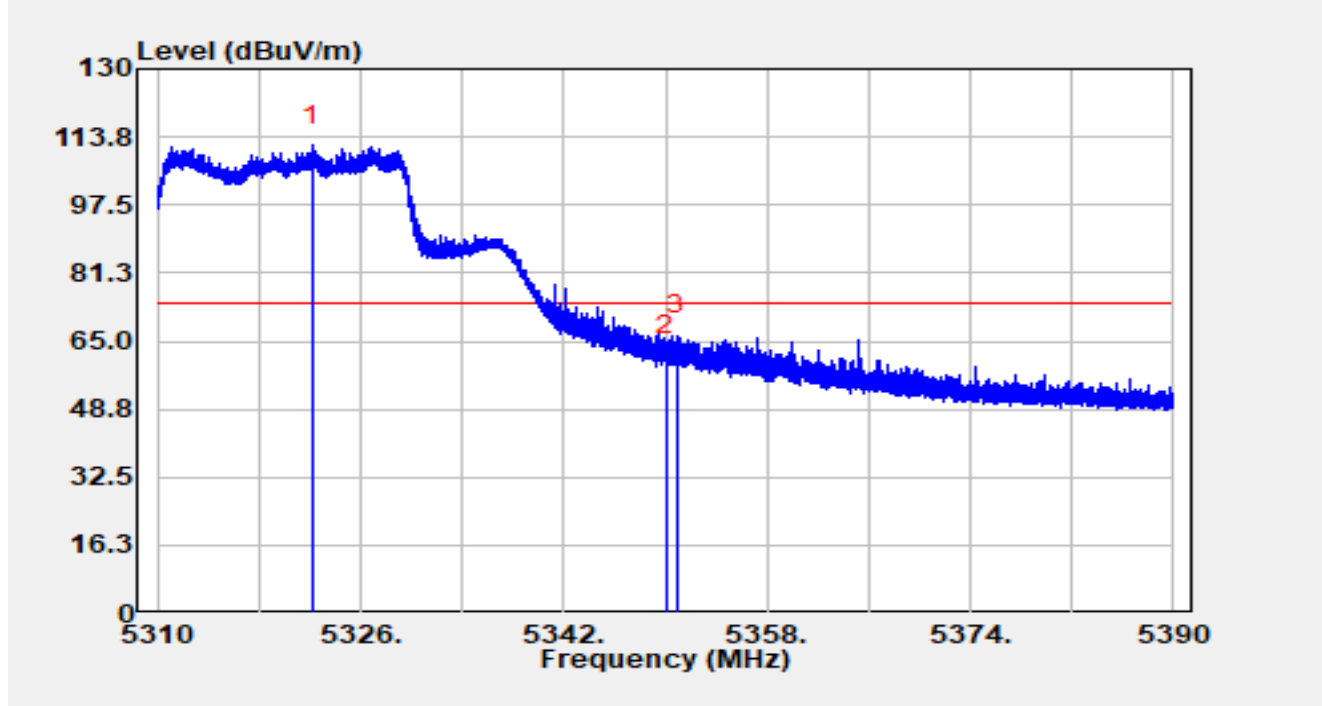


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5322.160	71.70	40.02	111.72	N/A	N/A	Peak
2		5350.000	62.98	-1.38	61.60	-12.40	74.00	Peak
3	*	5350.856	68.26	-1.82	66.45	-7.55	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

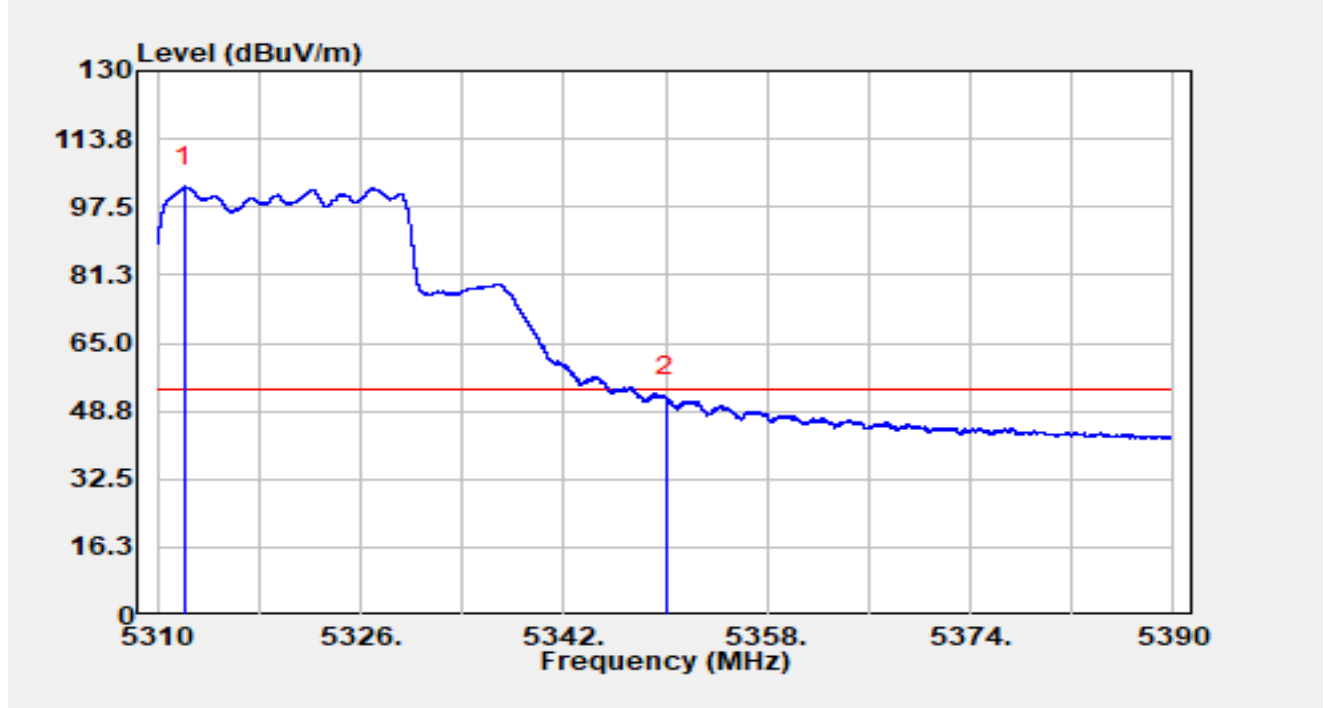


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.120	56.10	46.23	102.33	N/A	N/A	Average
2	*	5350.000	53.46	-1.38	52.08	-1.92	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

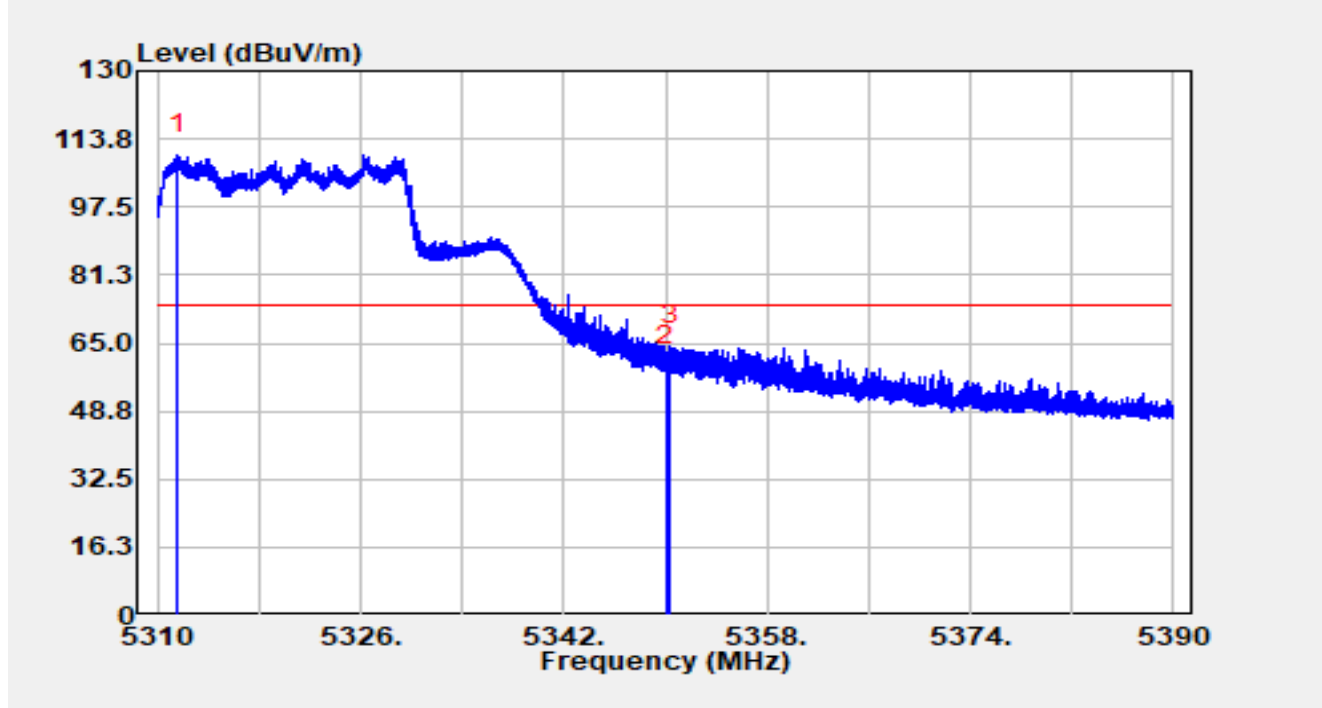


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.552	64.76	45.35	110.11	N/A	N/A	Peak
2		5350.000	61.09	-1.38	59.71	-14.29	74.00	Peak
3	*	5350.328	65.93	-1.55	64.38	-9.62	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

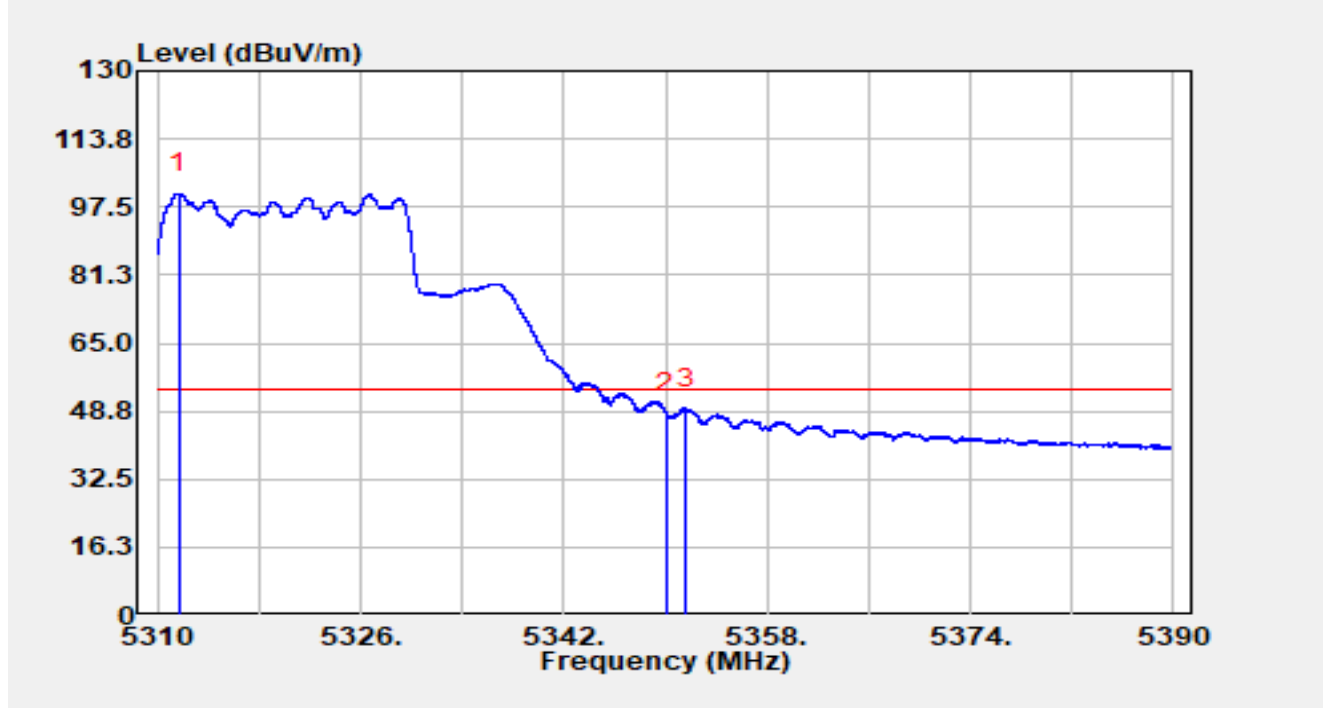


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.656	55.27	45.50	100.78	N/A	N/A	Average
2		5350.000	49.92	-1.38	48.54	-5.46	54.00	Average
3	*	5351.576	51.53	-2.13	49.39	-4.61	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

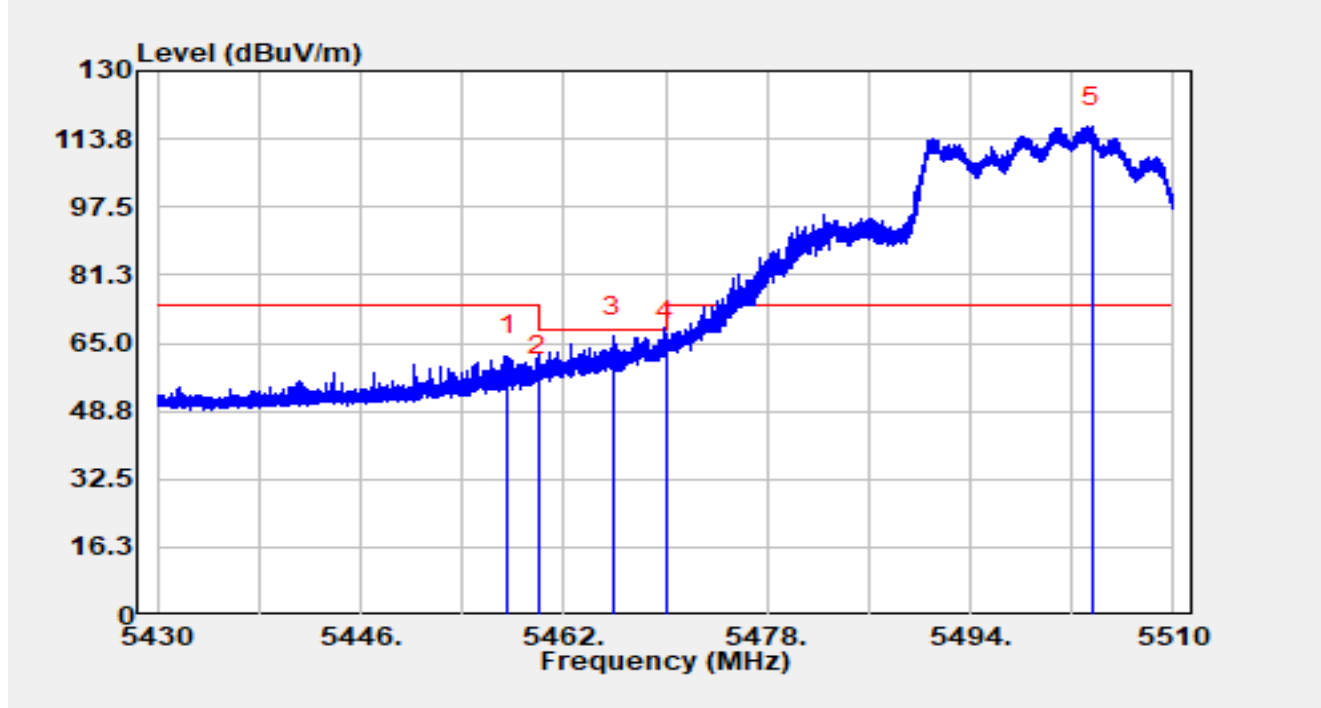


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.584	64.69	-2.80	61.89	-12.11	74.00	Peak
2		5460.000	59.73	-2.55	57.17	-11.03	68.20	Peak
3	*	5465.880	68.44	-1.90	66.55	-1.65	68.20	Peak
4		5470.000	66.41	-0.76	65.65	-2.55	68.20	Peak
5		5503.560	72.83	43.85	116.68	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

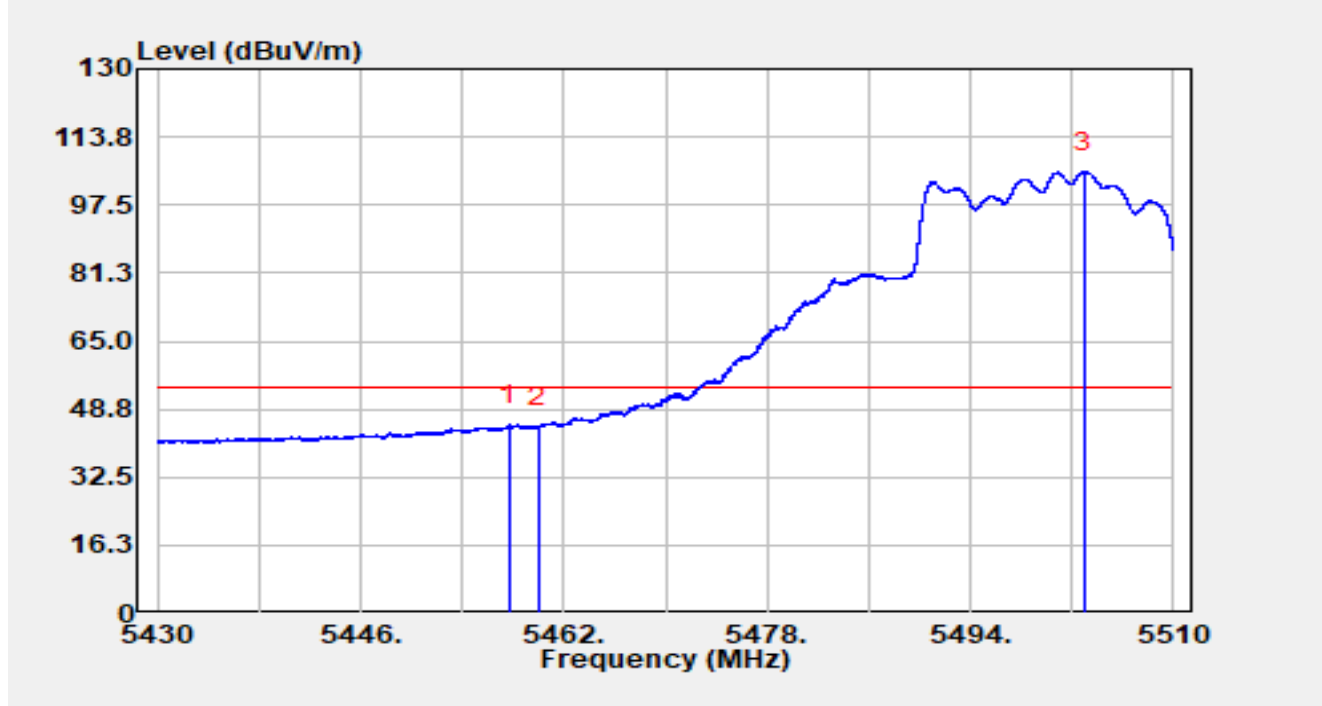


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.640	47.77	-2.79	44.97	-9.03	54.00	Average
2		5460.000	47.18	-2.55	44.63	-9.37	54.00	Average
3		5502.968	62.57	42.77	105.35	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

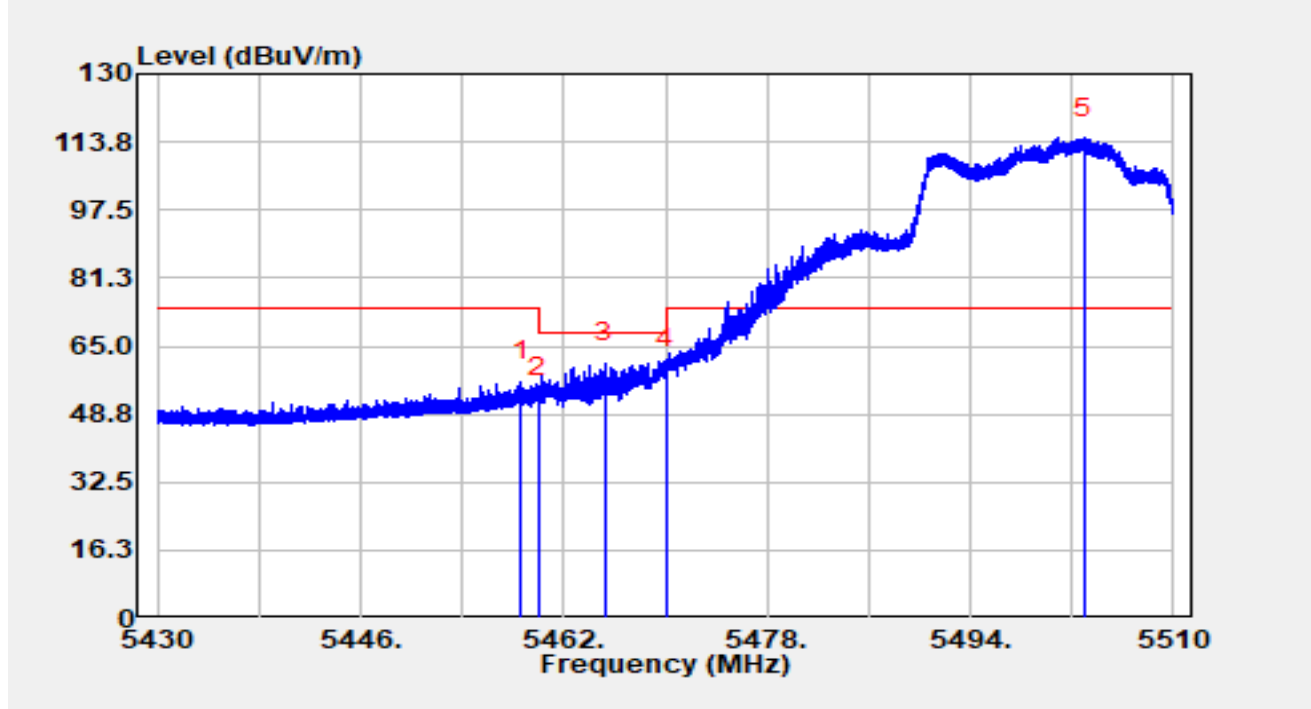


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.624	59.23	-2.68	56.55	-17.45	74.00	Peak
2		5460.000	55.46	-2.55	52.90	-15.30	68.20	Peak
3	*	5465.200	62.83	-1.99	60.84	-7.36	68.20	Peak
4		5470.000	60.36	-0.76	59.60	-8.60	68.20	Peak
5		5502.920	72.05	42.67	114.72	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

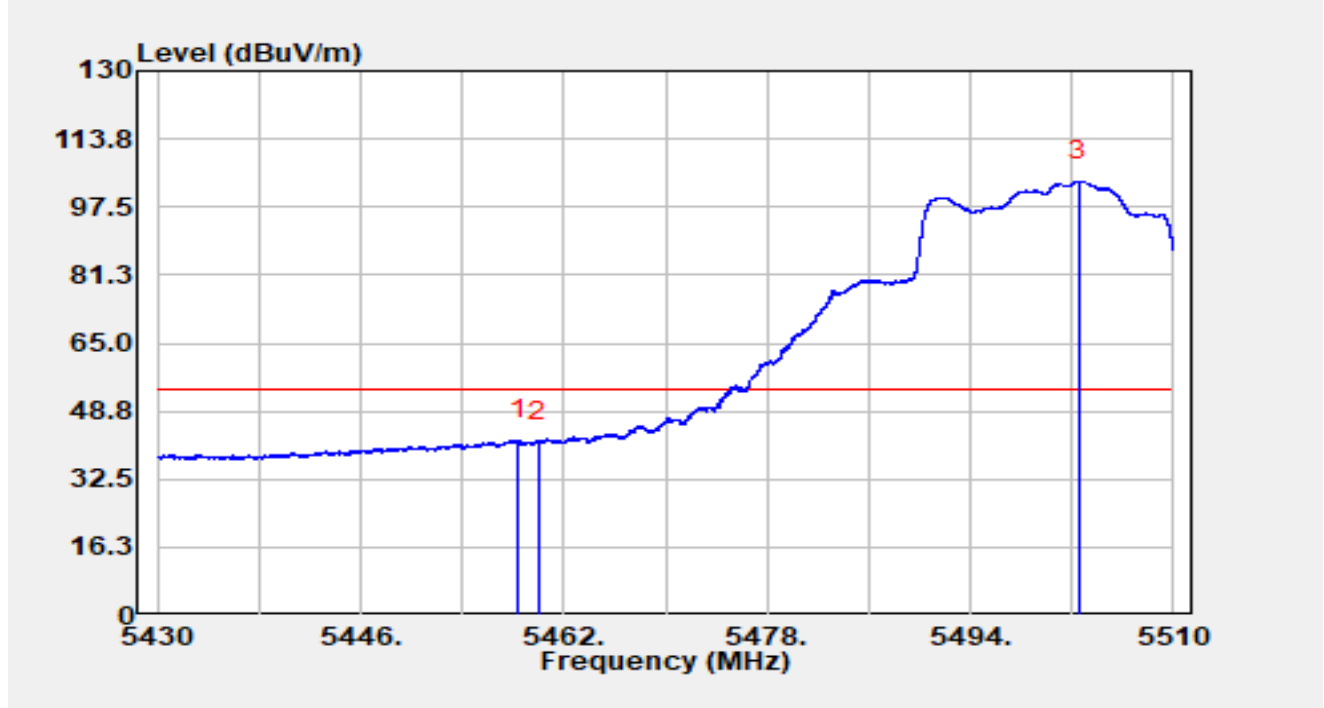


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.424	44.45	-2.66	41.78	-12.22	54.00	Average
2		5460.000	44.22	-2.55	41.67	-12.33	54.00	Average
3		5502.544	61.80	41.88	103.68	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5700MHz		

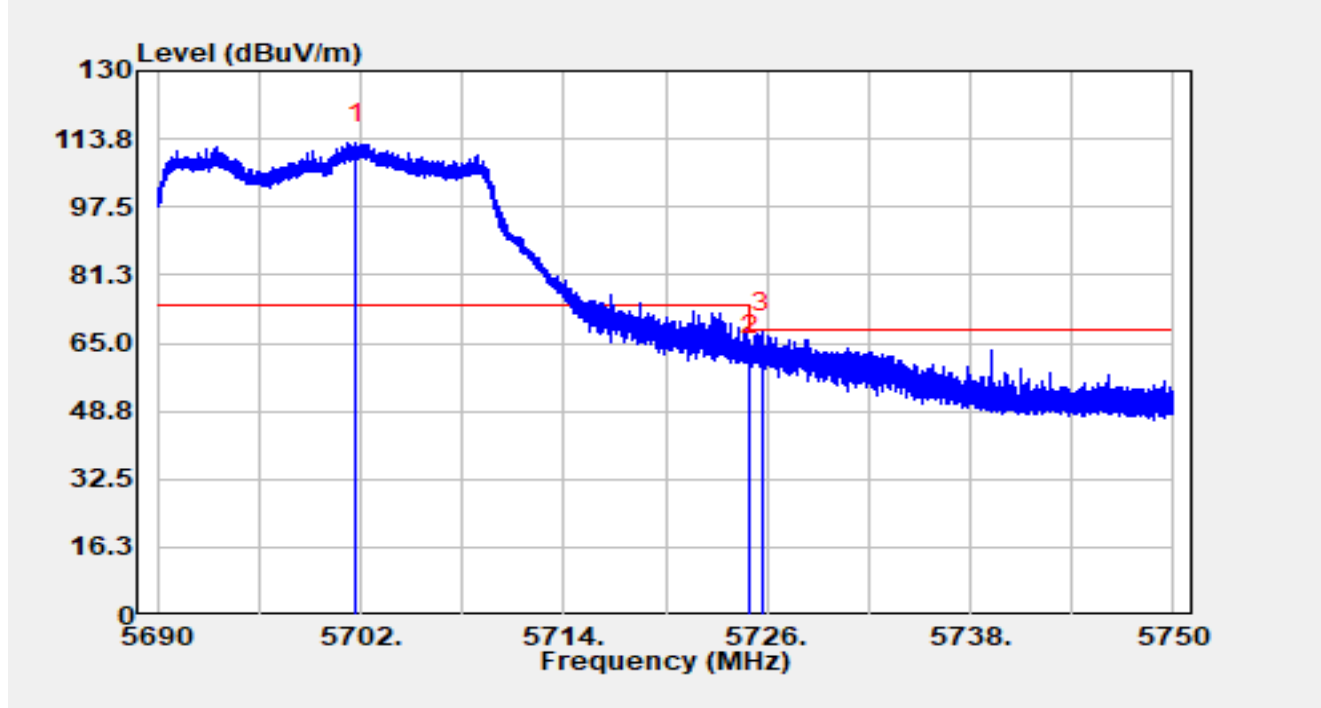


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.694	75.37	37.45	112.81	N/A	N/A	Peak
2		5725.000	63.14	-0.89	62.24	-5.96	68.20	Peak
3	*	5725.730	68.82	-1.30	67.52	-0.68	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5700MHz		

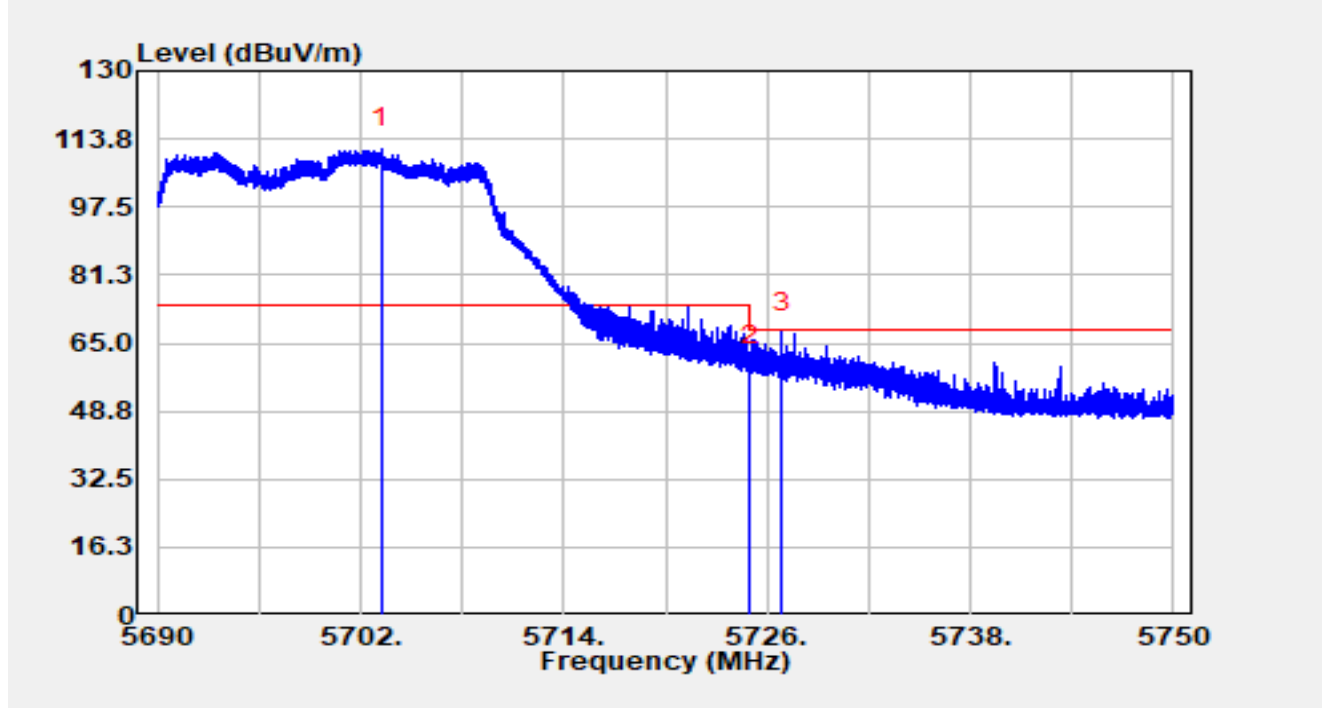


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.242	72.80	38.76	111.56	N/A	N/A	Peak
2		5725.000	60.29	-0.89	59.39	-8.81	68.20	Peak
3	*	5726.864	69.41	-1.80	67.60	-0.60	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

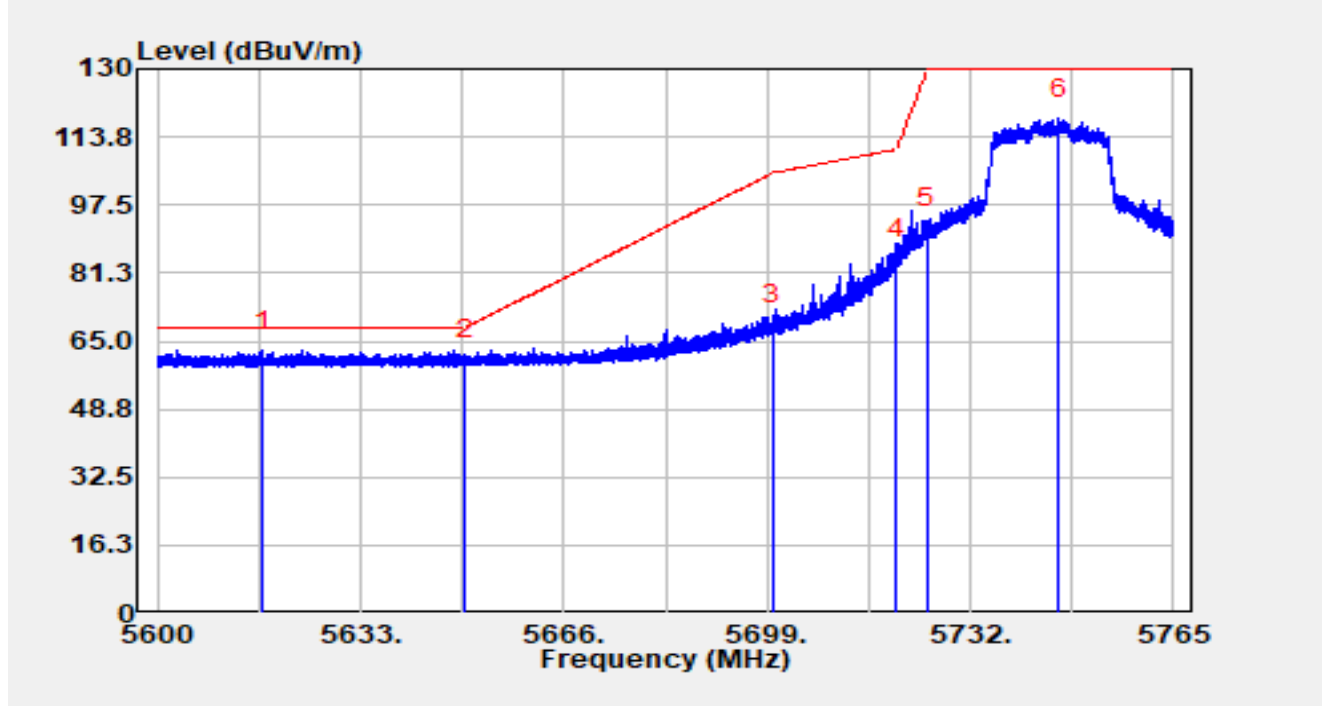


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5617.226	70.28	-7.56	62.72	-5.48	68.20	Peak
2		5650.000	68.05	-7.67	60.38	-7.82	68.20	Peak
3		5700.000	76.17	-7.49	68.68	-36.52	105.20	Peak
4		5720.000	92.07	-7.37	84.70	-26.10	110.80	Peak
5		5725.000	99.50	-7.36	92.14	-37.86	130.00	Peak
6		5746.272	125.65	-7.56	118.09	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

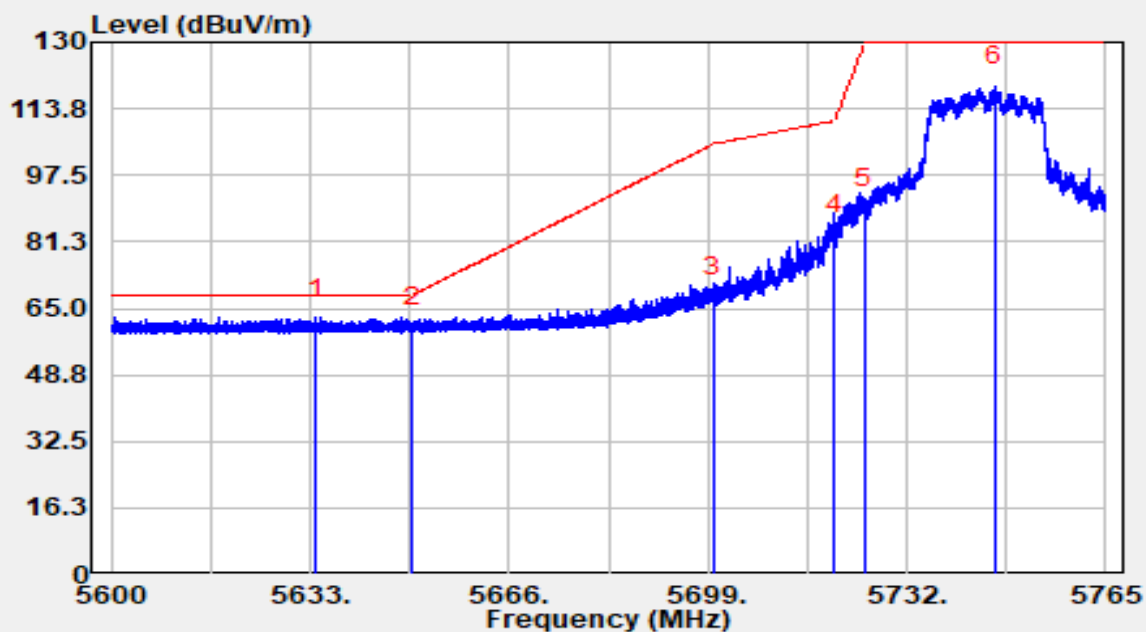


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5633.990	70.38	-7.61	62.77	-5.43	68.20	Peak
2		5650.000	68.02	-7.67	60.35	-7.85	68.20	Peak
3		5700.000	75.62	-7.49	68.13	-37.07	105.20	Peak
4		5720.000	90.31	-7.37	82.94	-27.86	110.80	Peak
5		5725.000	96.91	-7.36	89.55	-40.45	130.00	Peak
6		5746.569	126.84	-7.56	119.28	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

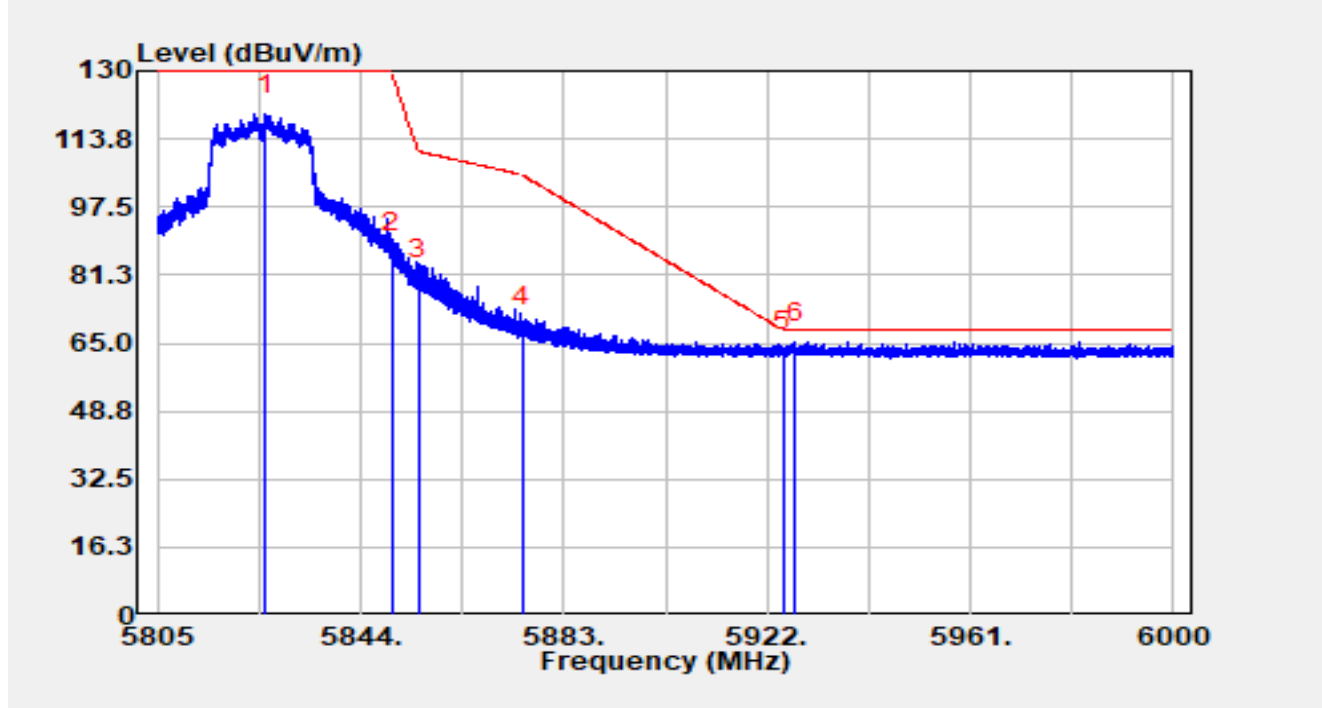


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5825.787	125.40	-5.73	119.67	N/A	N/A	Peak
2		5850.000	92.02	-5.64	86.38	-43.62	130.00	Peak
3		5855.000	85.82	-5.69	80.13	-30.67	110.80	Peak
4		5875.000	74.80	-5.74	69.06	-36.14	105.20	Peak
5		5925.000	68.80	-5.59	63.21	-4.99	68.20	Peak
6	*	5927.421	70.67	-5.56	65.11	-3.09	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

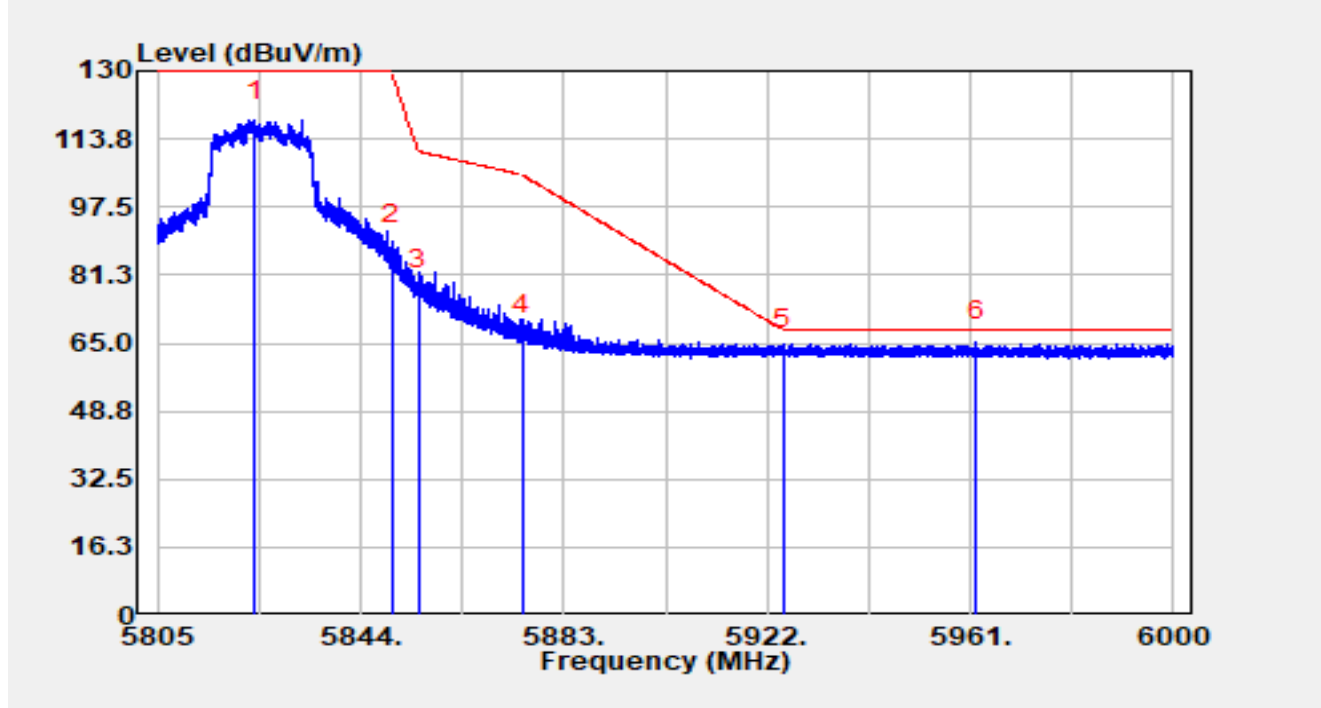


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.778	123.81	-5.75	118.06	N/A	N/A	Peak
2		5850.000	94.36	-5.64	88.73	-41.27	130.00	Peak
3		5855.000	83.63	-5.69	77.95	-32.85	110.80	Peak
4		5875.000	72.67	-5.74	66.93	-38.27	105.20	Peak
5		5925.000	69.25	-5.59	63.66	-4.54	68.20	Peak
6	*	5962.092	70.94	-5.52	65.42	-2.78	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

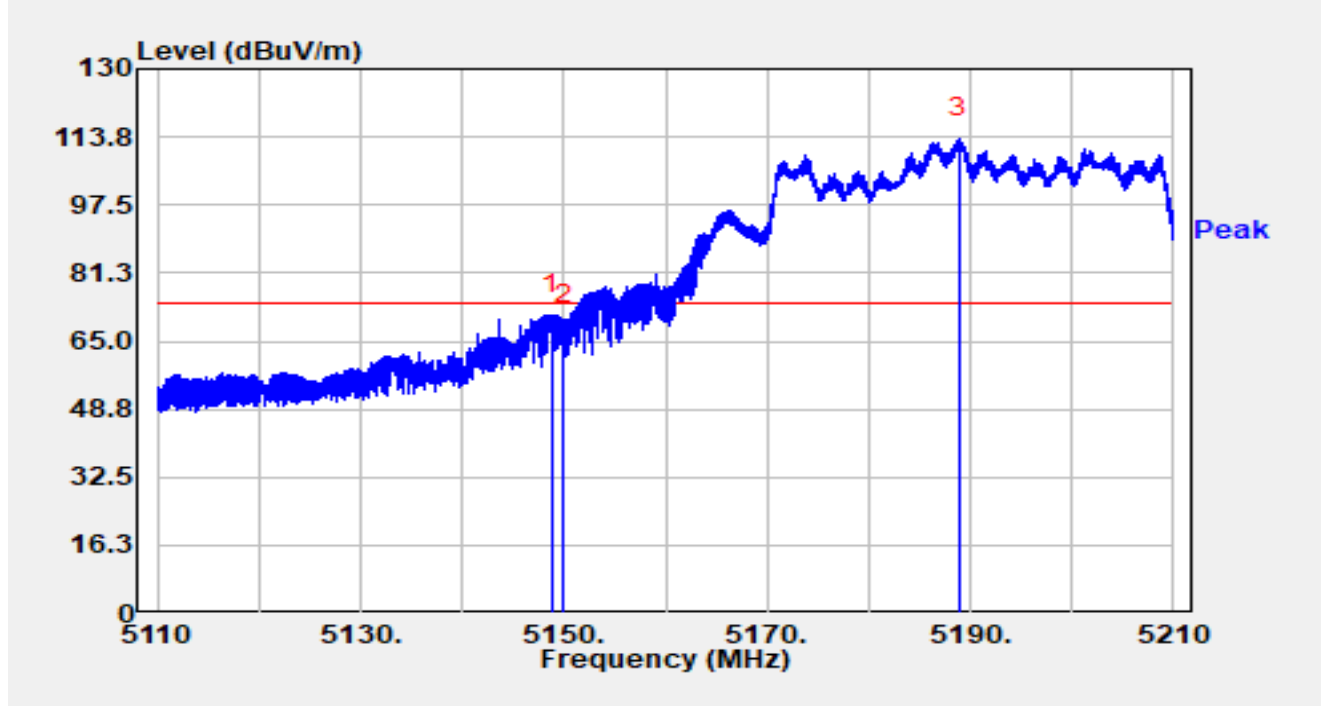


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.810	71.42	-0.05	71.37	-2.63	74.00	Peak
2		5150.000	68.76	0.18	68.93	-5.07	74.00	Peak
3		5188.870	71.79	41.71	113.49	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

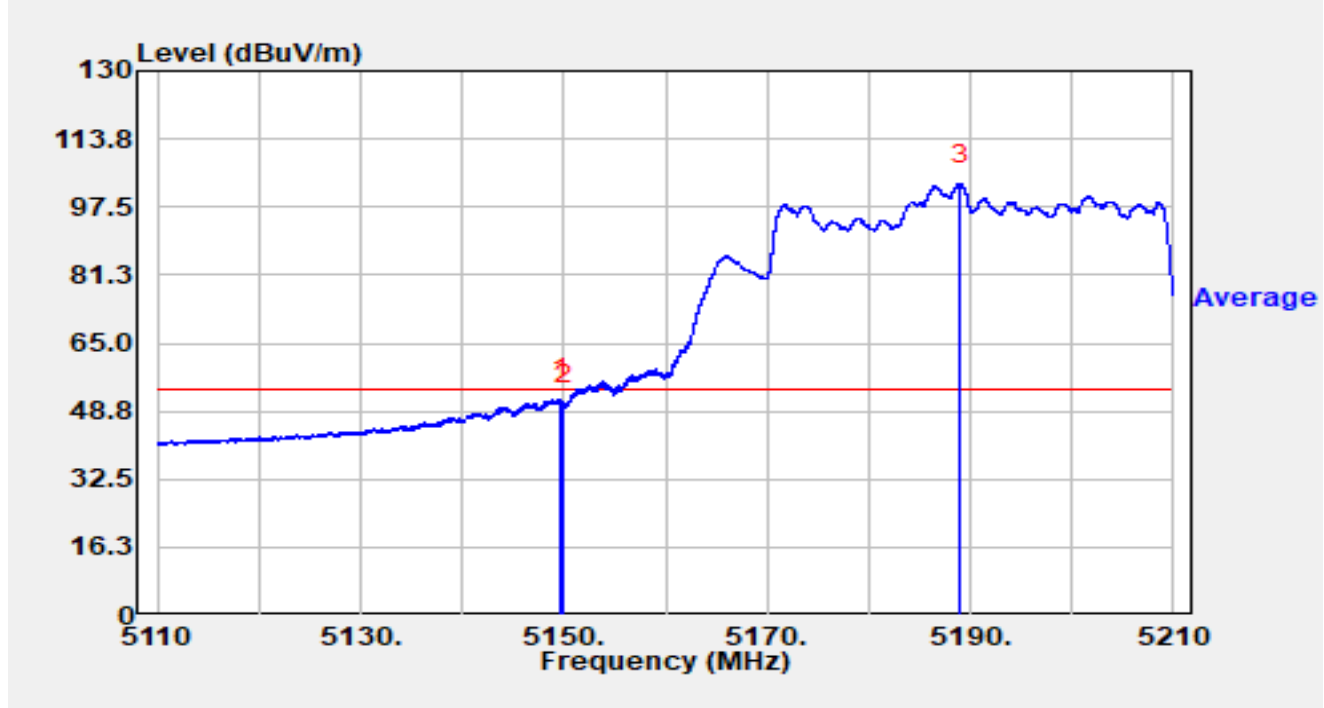


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.700	51.40	0.13	51.53	-2.47	54.00	Average
2		5150.000	50.27	0.18	50.45	-3.55	54.00	Average
3		5188.990	61.08	41.86	102.94	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

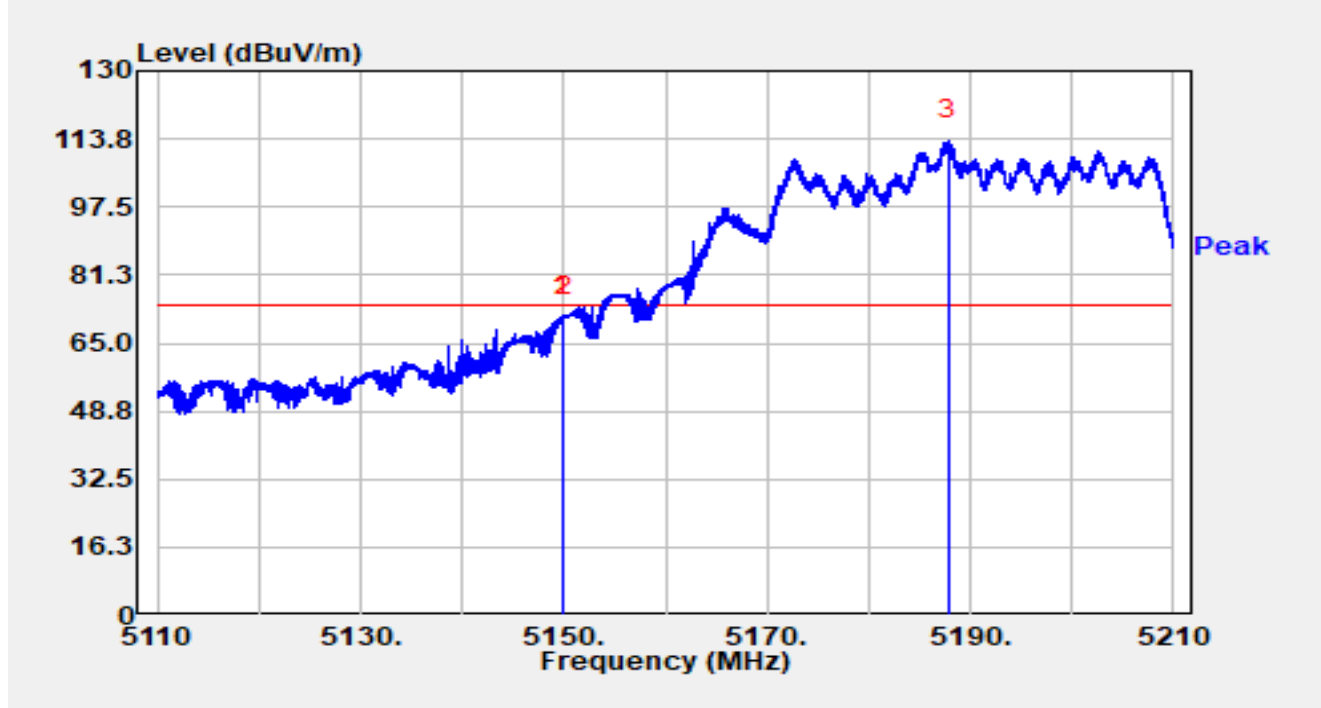


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.860	71.10	0.16	71.26	-2.74	74.00	Peak
2		5150.000	70.96	0.18	71.14	-2.86	74.00	Peak
3		5187.880	73.26	40.23	113.49	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

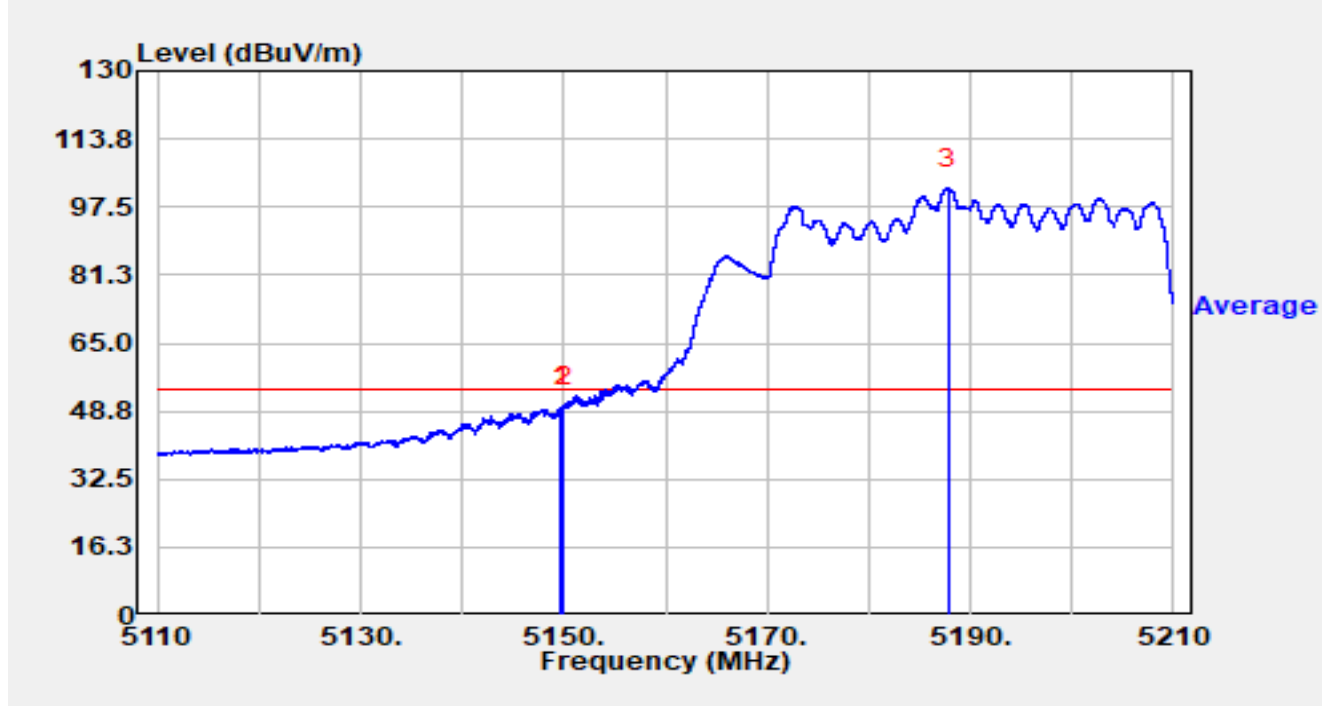


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.760	49.64	0.14	49.78	-4.22	54.00	Average
2		5150.000	49.45	0.18	49.63	-4.37	54.00	Average
3		5187.790	61.95	40.08	102.04	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

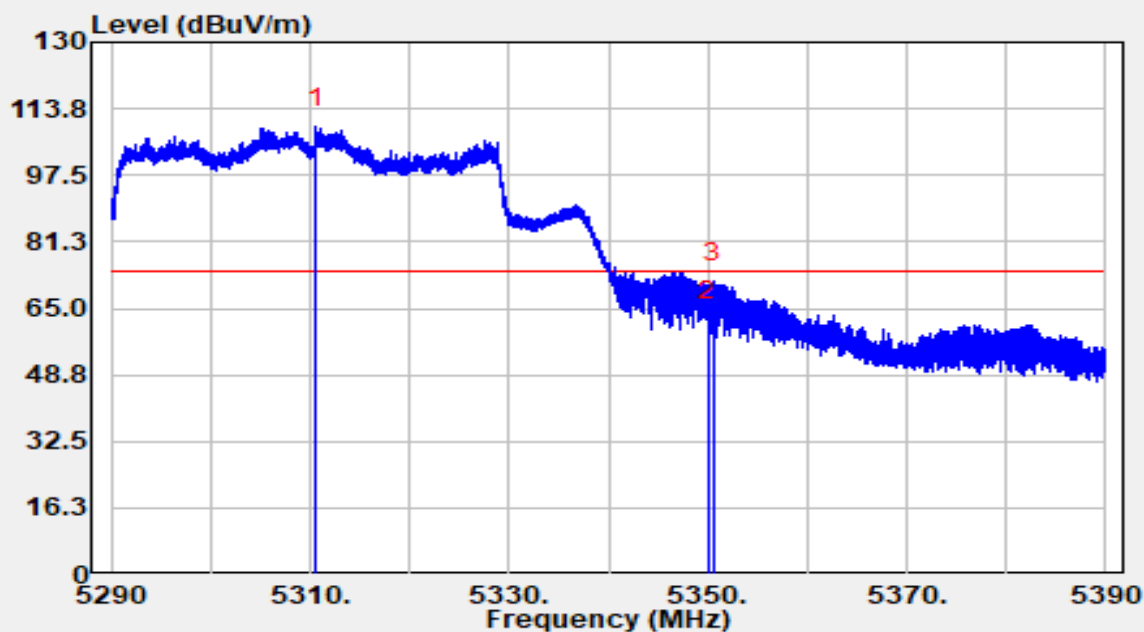


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5310.560	65.47	43.86	109.33	N/A	N/A	Peak
2		5350.000	63.36	-1.38	61.98	-12.02	74.00	Peak
3	*	5350.590	73.26	-1.69	71.57	-2.43	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

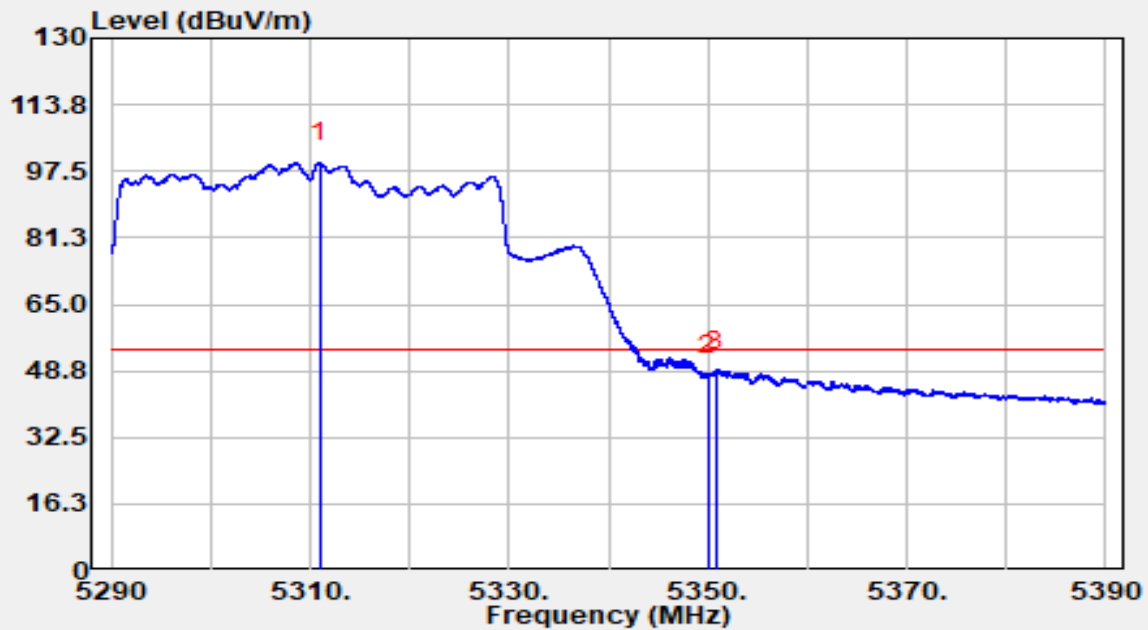


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.050	55.10	44.61	99.71	N/A	N/A	Average
2		5350.000	49.25	-1.38	47.87	-6.13	54.00	Average
3	*	5350.830	50.86	-1.80	49.05	-4.95	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

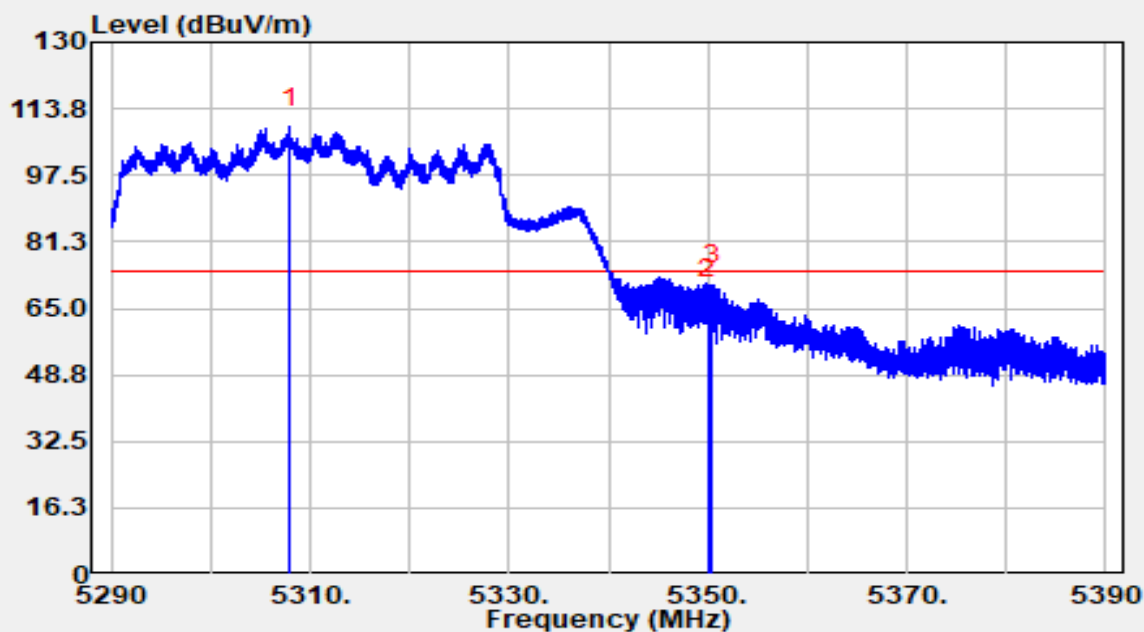


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.930	68.63	40.67	109.31	N/A	N/A	Peak
2		5350.000	68.80	-1.38	67.42	-6.58	74.00	Peak
3	*	5350.360	72.31	-1.57	70.74	-3.26	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

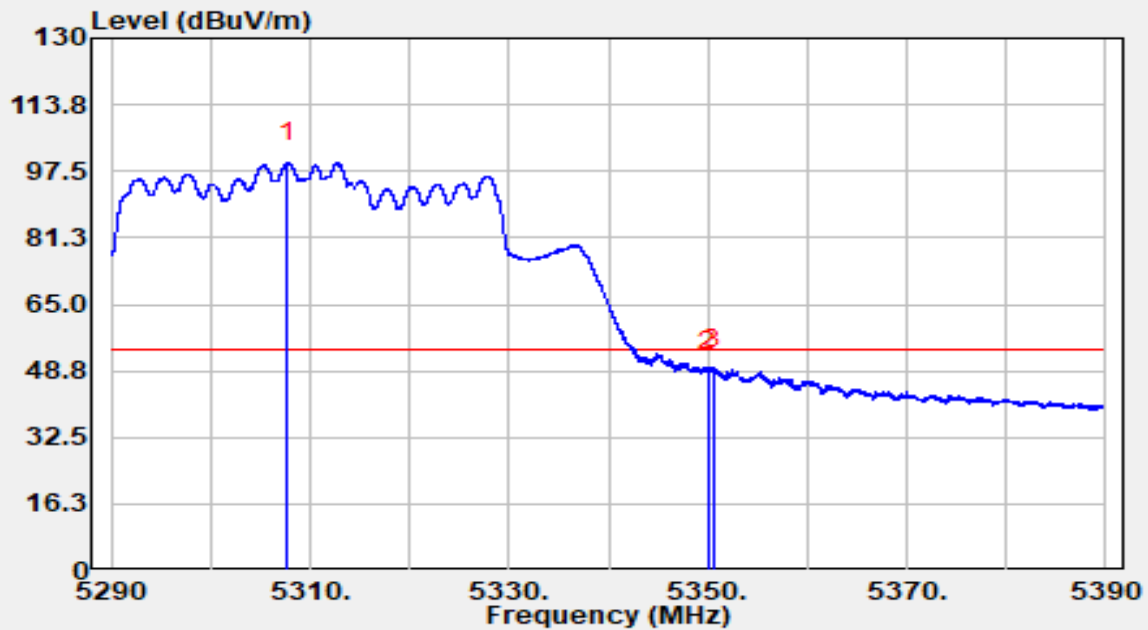


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.700	59.18	40.49	99.66	N/A	N/A	Average
2		5350.000	50.43	-1.38	49.05	-4.95	54.00	Average
3	*	5350.520	50.99	-1.65	49.34	-4.66	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

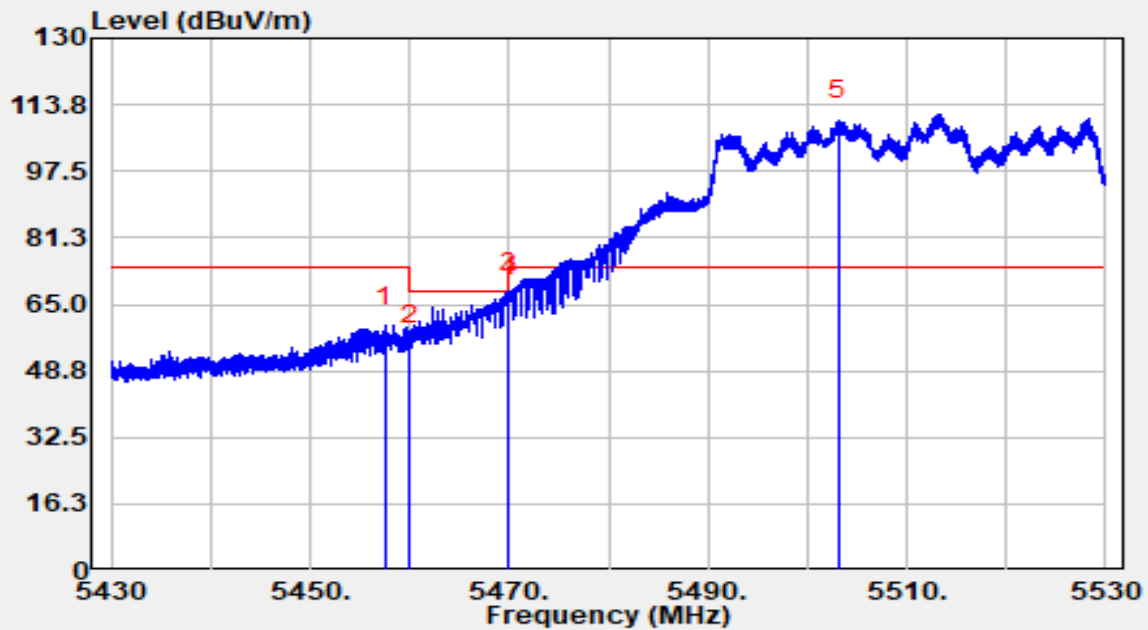


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.510	62.57	-2.80	59.78	-14.22	74.00	Peak
2		5460.000	57.65	-2.55	55.10	-13.10	68.20	Peak
3	*	5469.970	68.63	-0.77	67.86	-0.34	68.20	Peak
4		5470.000	67.74	-0.76	66.98	-1.22	68.20	Peak
5		5503.140	66.93	43.14	110.07	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

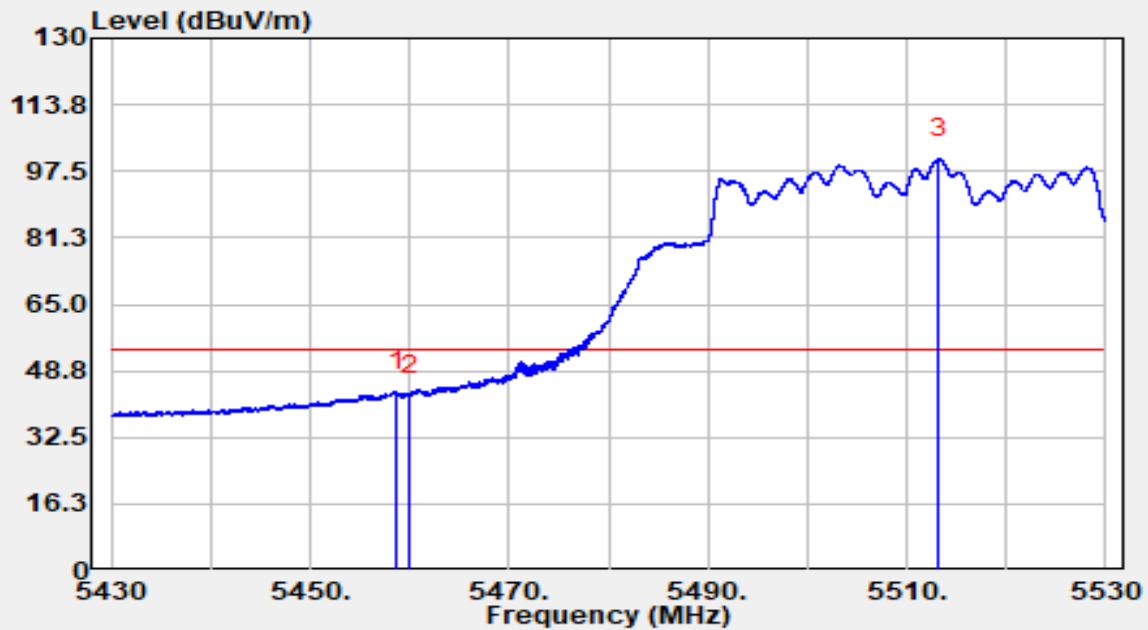


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.680	46.51	-2.68	43.83	-10.17	54.00	Average
2		5460.000	45.52	-2.55	42.96	-11.04	54.00	Average
3		5513.220	58.07	42.53	100.61	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

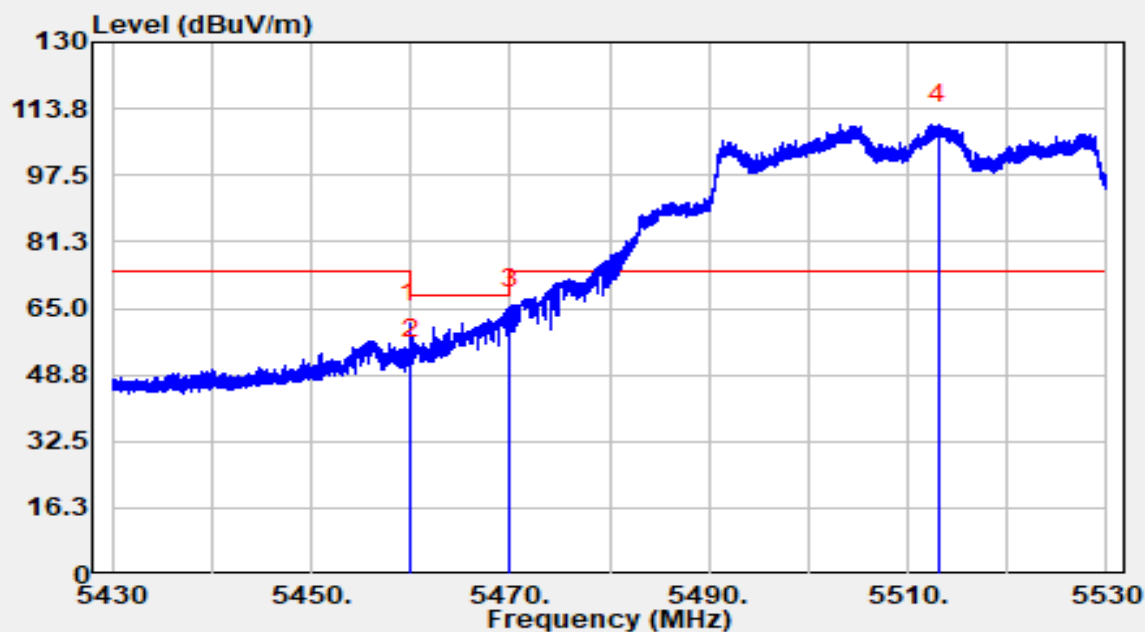


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.940	64.09	-2.56	61.53	-12.47	74.00	Peak
2		5460.000	55.43	-2.55	52.88	-15.32	68.20	Peak
3	*	5470.000	65.93	-0.76	65.17	-3.03	68.20	Peak
4		5513.050	67.68	42.31	110.00	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

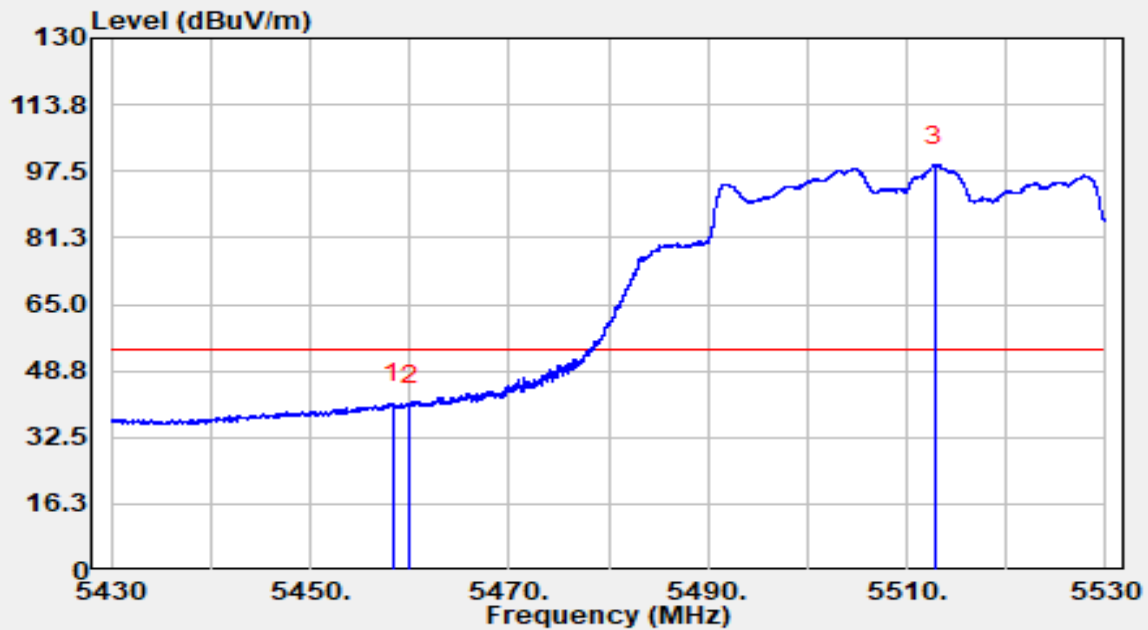


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.280	43.40	-2.68	40.73	-13.27	54.00	Average
2		5460.000	42.89	-2.55	40.34	-13.66	54.00	Average
3		5512.840	57.00	42.04	99.04	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

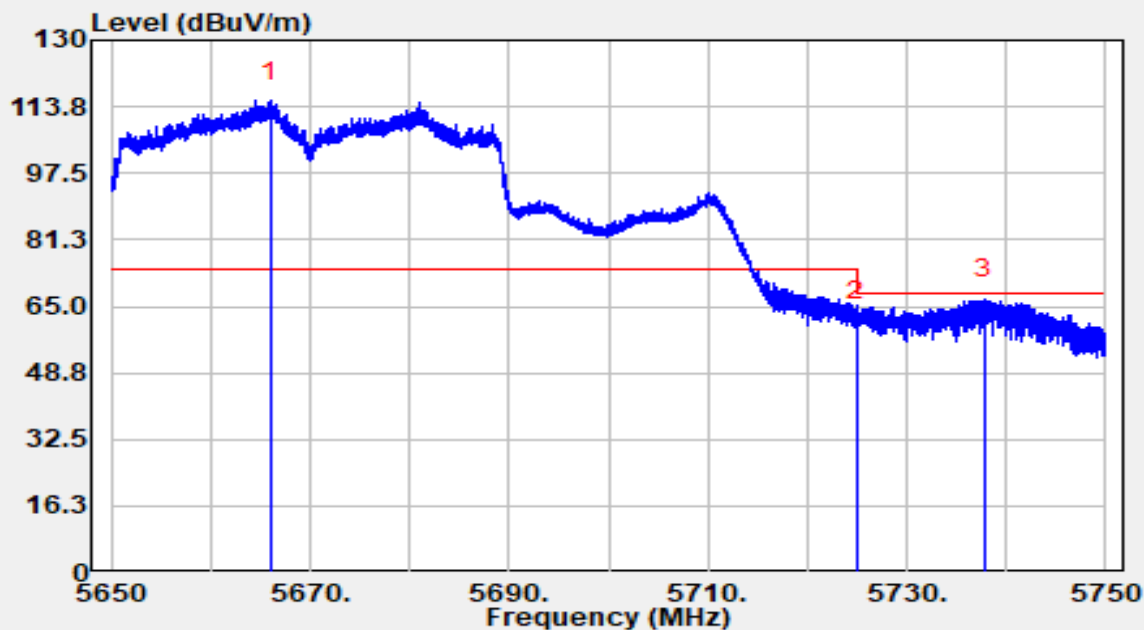


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5666.050	71.09	44.08	115.18	N/A	N/A	Peak
2		5725.000	62.69	-0.89	61.80	-6.40	68.20	Peak
3	*	5737.820	70.27	-3.54	66.73	-1.47	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

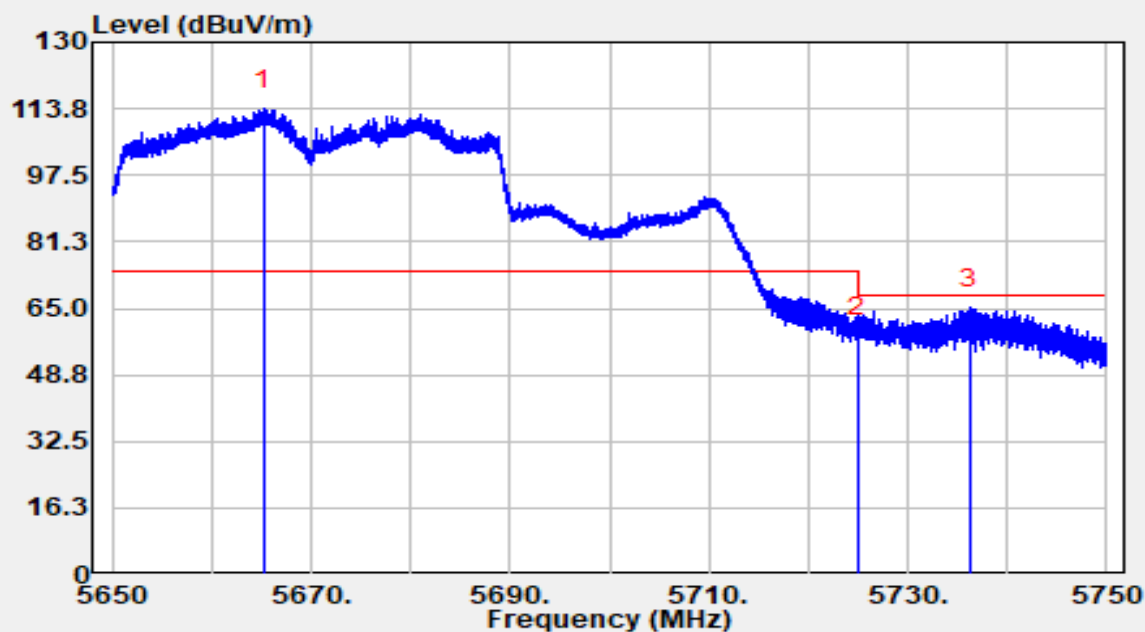


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5665.260	70.66	43.05	113.71	N/A	N/A	Peak
2		5725.000	58.90	-0.89	58.00	-10.20	68.20	Peak
3	*	5736.230	68.43	-3.41	65.02	-3.18	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

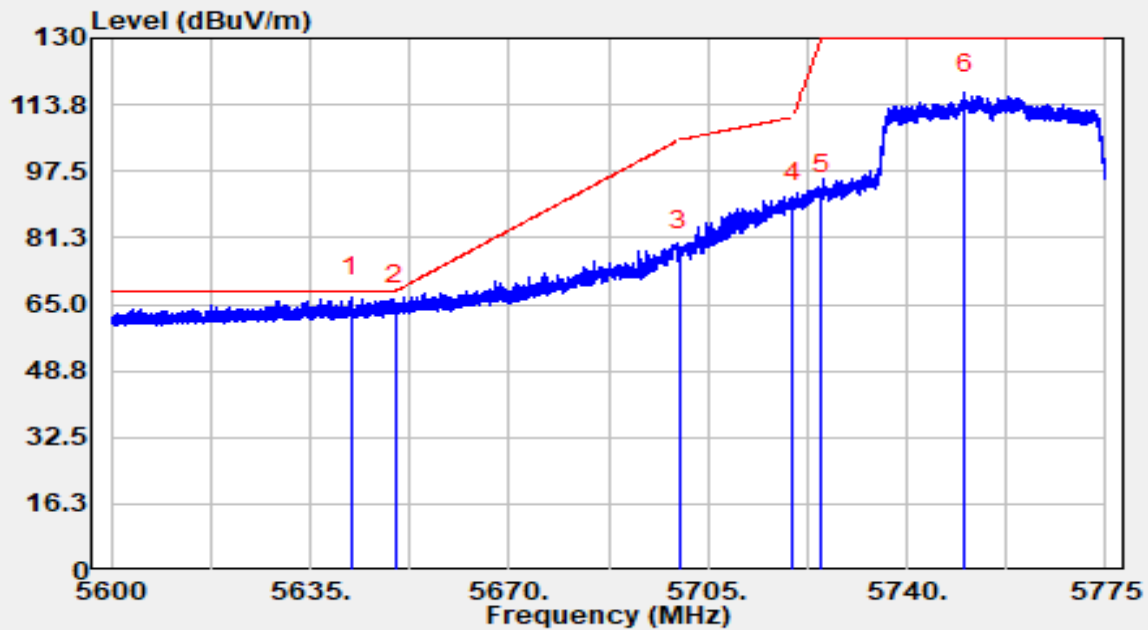


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.297	74.49	-7.69	66.80	-1.40	68.20	Peak
2		5650.000	72.65	-7.67	64.98	-3.22	68.20	Peak
3		5700.000	85.49	-7.49	78.01	-27.19	105.20	Peak
4		5720.000	97.60	-7.37	90.22	-20.58	110.80	Peak
5		5725.000	99.17	-7.36	91.81	-38.19	130.00	Peak
6		5750.272	124.10	-7.54	116.56	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	23.2°C	Humidity	45.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

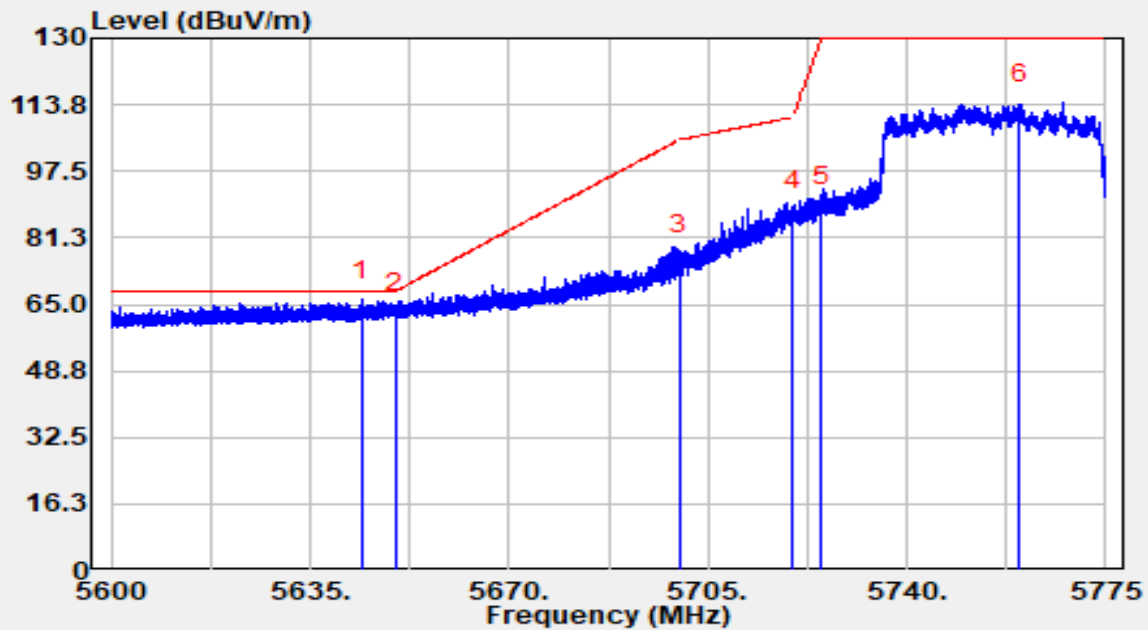


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.030	73.82	-7.69	66.13	-2.07	68.20	Peak
2		5650.000	70.88	-7.67	63.21	-4.99	68.20	Peak
3		5700.000	84.94	-7.49	77.46	-27.74	105.20	Peak
4		5720.000	95.22	-7.37	87.85	-22.95	110.80	Peak
5		5725.000	96.25	-7.36	88.89	-41.11	130.00	Peak
6		5759.933	121.54	-7.52	114.02	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

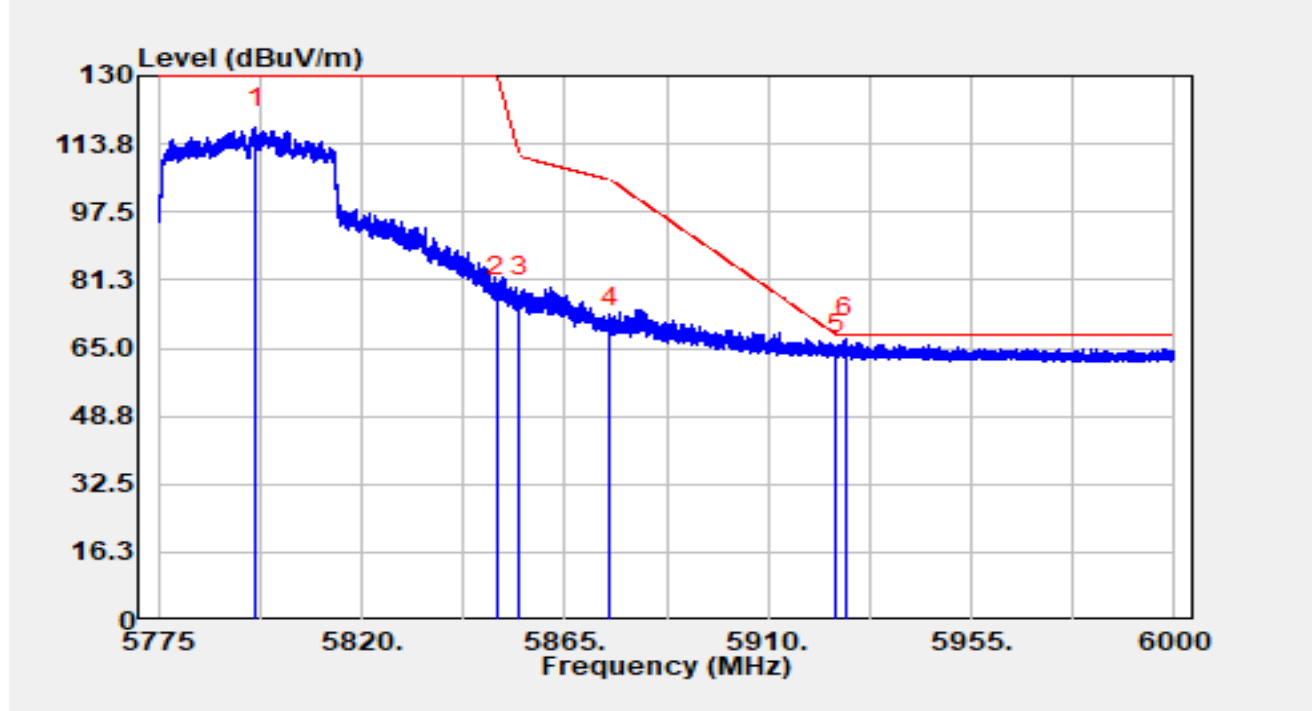


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5796.712	123.33	-5.63	117.69	N/A	N/A	Peak
2		5850.000	82.97	-5.64	77.33	-52.67	130.00	Peak
3		5855.000	82.96	-5.69	77.27	-33.53	110.80	Peak
4		5875.000	75.73	-5.74	69.99	-35.21	105.20	Peak
5		5925.000	69.22	-5.59	63.63	-4.57	68.20	Peak
6	*	5927.055	72.89	-5.57	67.32	-0.88	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-21
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

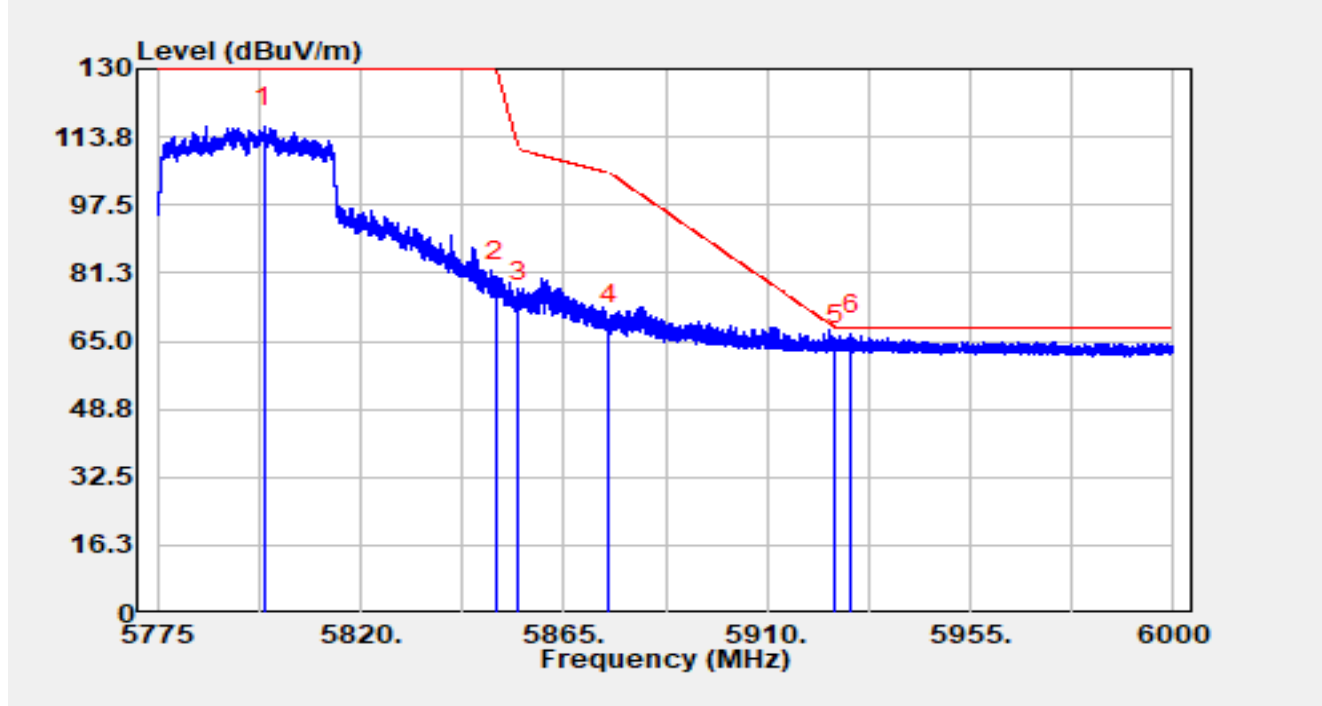


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5798.715	121.92	-5.66	116.25	N/A	N/A	Peak
2		5850.000	84.93	-5.64	79.30	-50.70	130.00	Peak
3		5855.000	79.79	-5.69	74.11	-36.69	110.80	Peak
4		5875.000	74.64	-5.74	68.90	-36.30	105.20	Peak
5		5925.000	69.43	-5.59	63.84	-4.36	68.20	Peak
6	*	5928.563	72.07	-5.55	66.53	-1.67	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

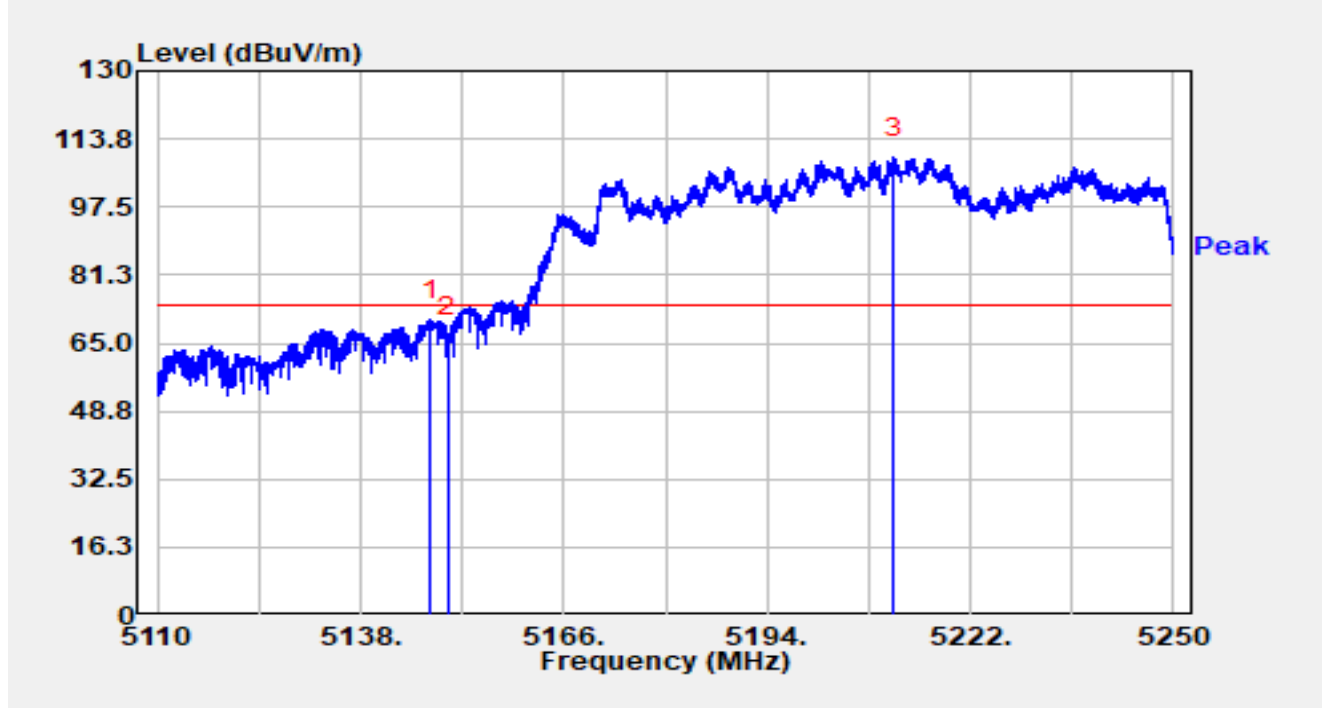


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.688	70.81	-0.23	70.58	-3.42	74.00	Peak
2		5150.000	66.35	0.18	66.53	-7.47	74.00	Peak
3		5211.374	69.74	39.42	109.17	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

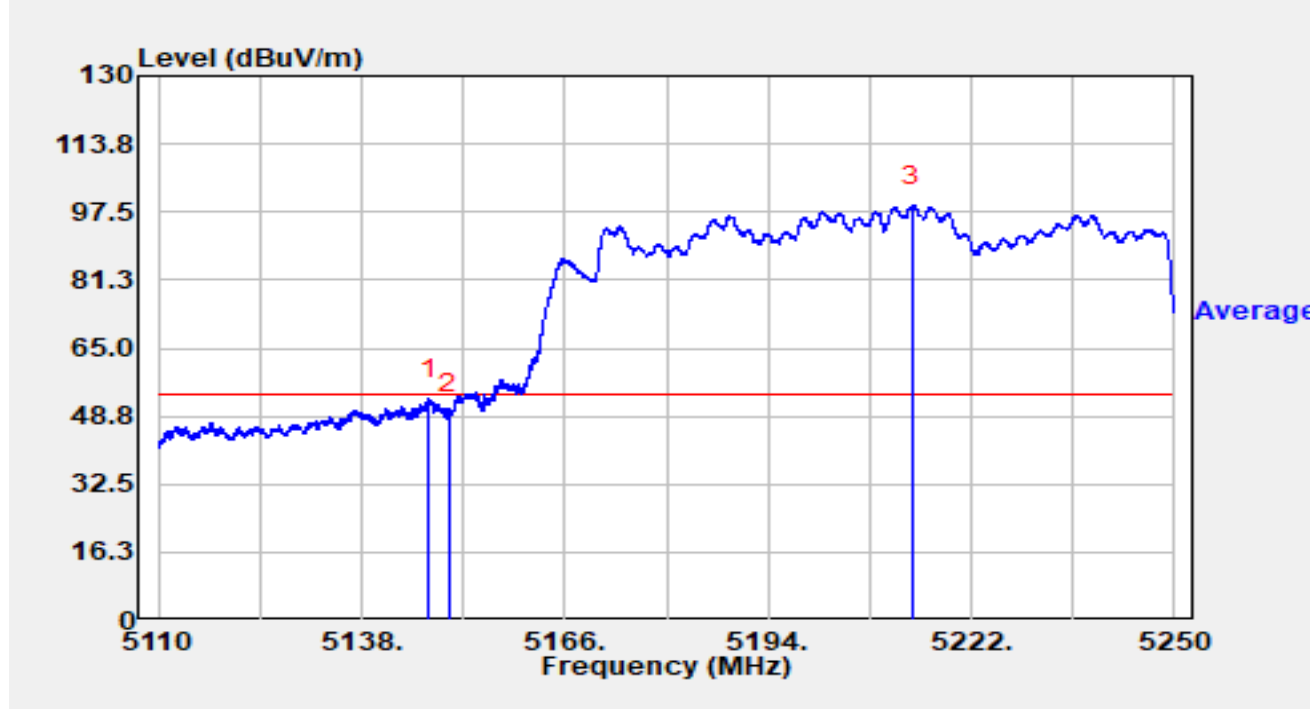


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.324	53.19	-0.27	52.93	-1.07	54.00	Average
2		5150.000	49.20	0.18	49.37	-4.63	54.00	Average
3		5213.908	58.85	40.07	98.92	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

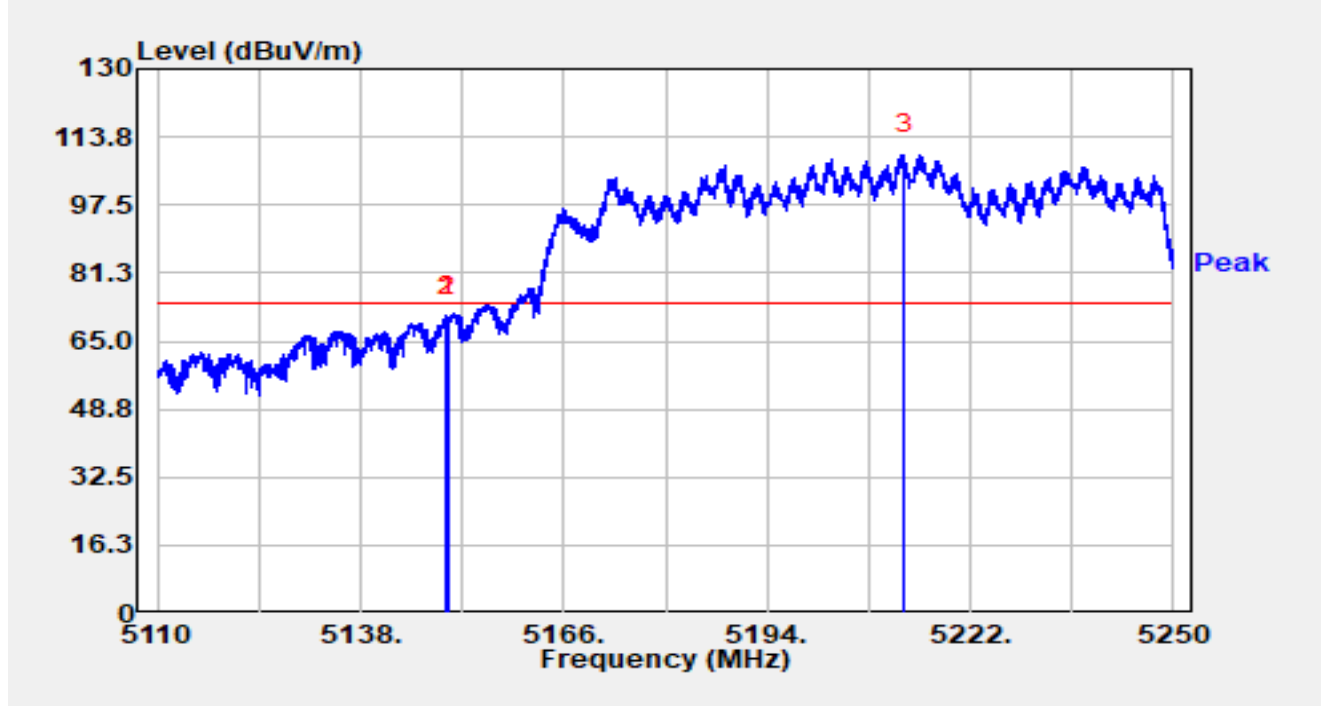


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.900	70.79	0.16	70.96	-3.04	74.00	Peak
2		5150.000	70.66	0.18	70.83	-3.17	74.00	Peak
3		5212.942	69.85	39.62	109.47	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-15
Temperature	22.7°C	Humidity	55.6%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

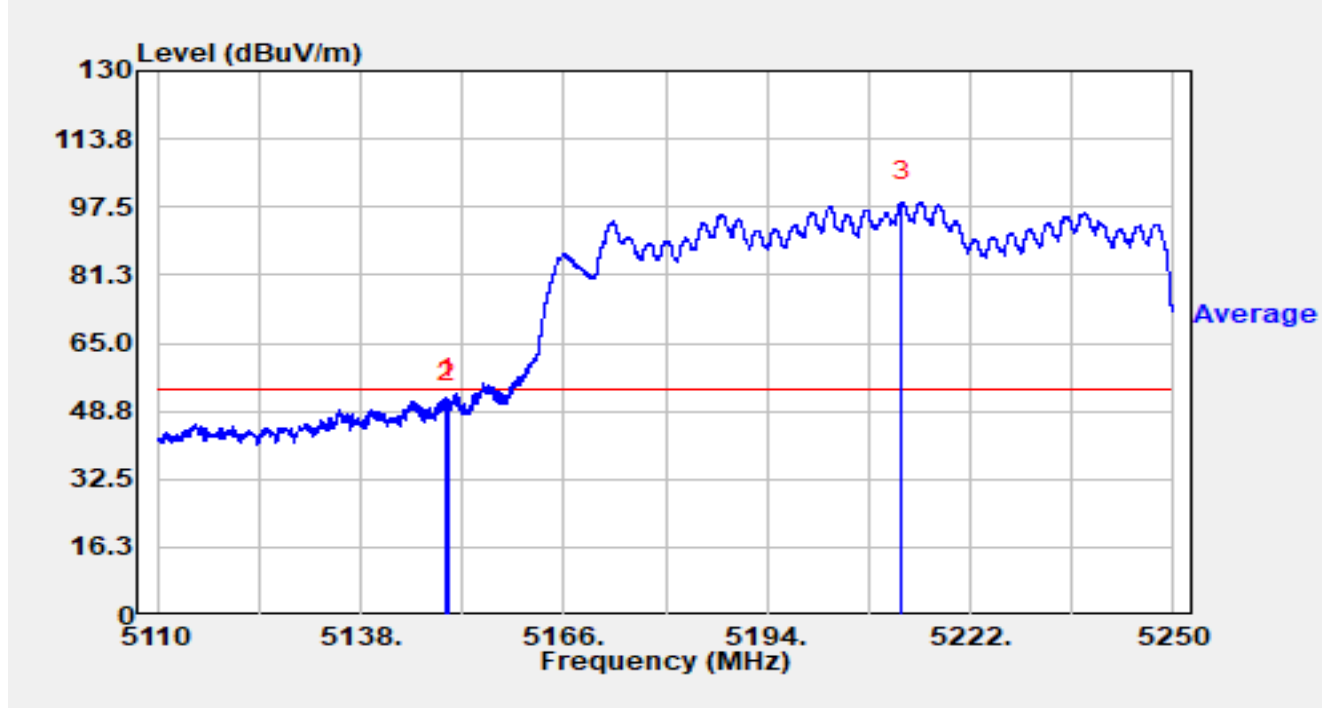


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.816	51.69	0.15	51.84	-2.16	54.00	Average
2		5149.998	50.62	0.18	50.80	-3.20	54.00	Average
3		5212.564	59.11	39.52	98.63	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

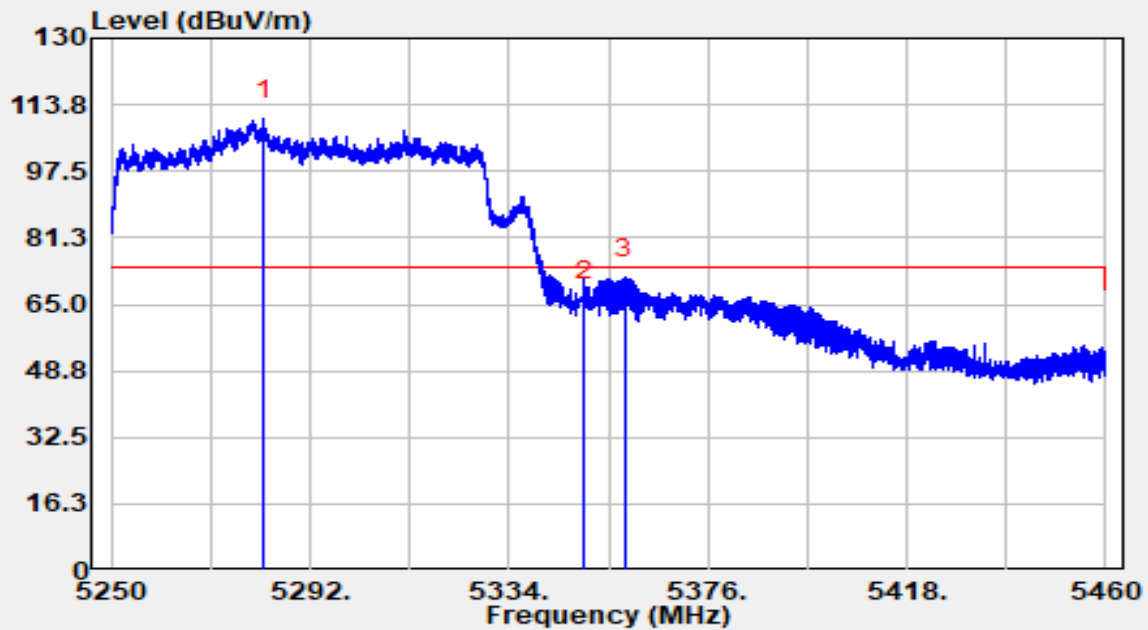


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5282.109	61.02	49.17	110.19	N/A	N/A	Peak
2		5350.000	66.35	-0.36	65.99	-8.01	74.00	Peak
3	*	5358.465	74.42	-2.97	71.46	-2.54	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

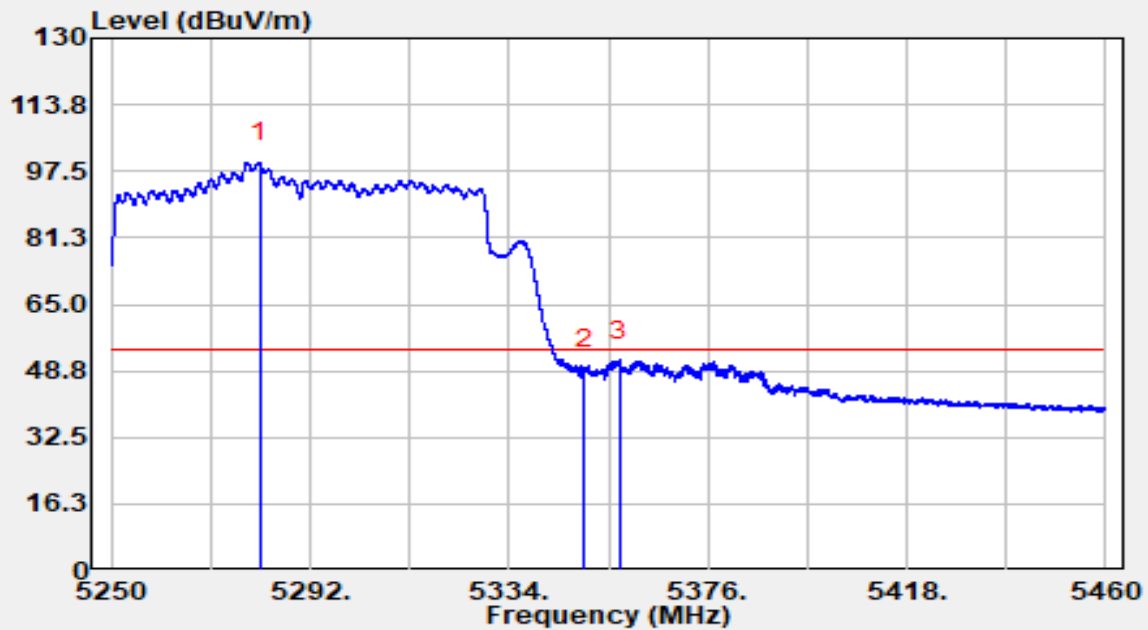


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5281.332	51.85	47.80	99.66	N/A	N/A	Average
2		5350.000	49.55	-0.36	49.19	-4.81	54.00	Average
3	*	5357.394	54.14	-2.84	51.30	-2.70	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

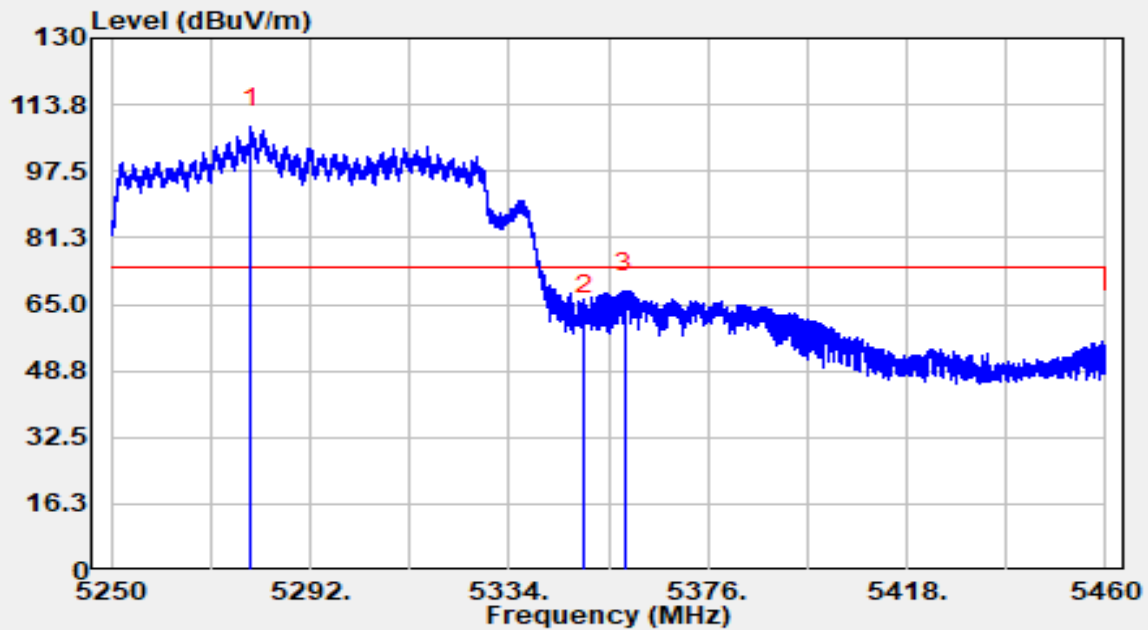


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5279.568	63.15	45.24	108.39	N/A	N/A	Peak
2		5350.002	63.06	-0.36	62.70	-11.30	74.00	Peak
3	*	5358.423	71.13	-2.96	68.17	-5.83	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

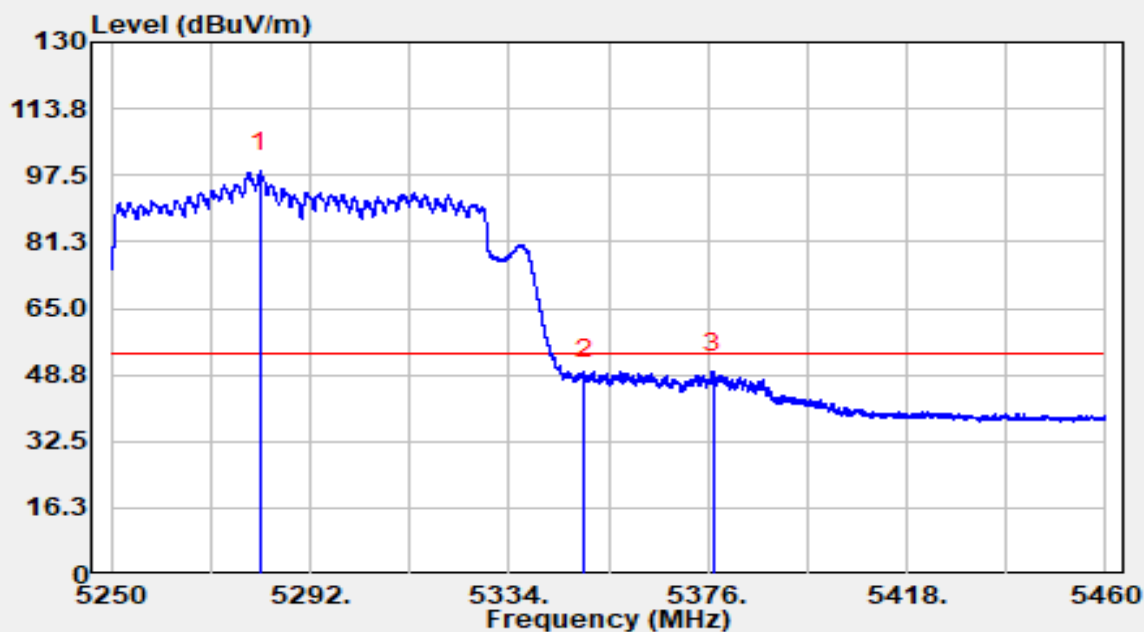


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5281.500	50.31	48.10	98.42	N/A	N/A	Average
2		5350.000	48.06	-0.36	47.71	-6.29	54.00	Average
3	*	5377.155	53.38	-3.88	49.49	-4.51	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

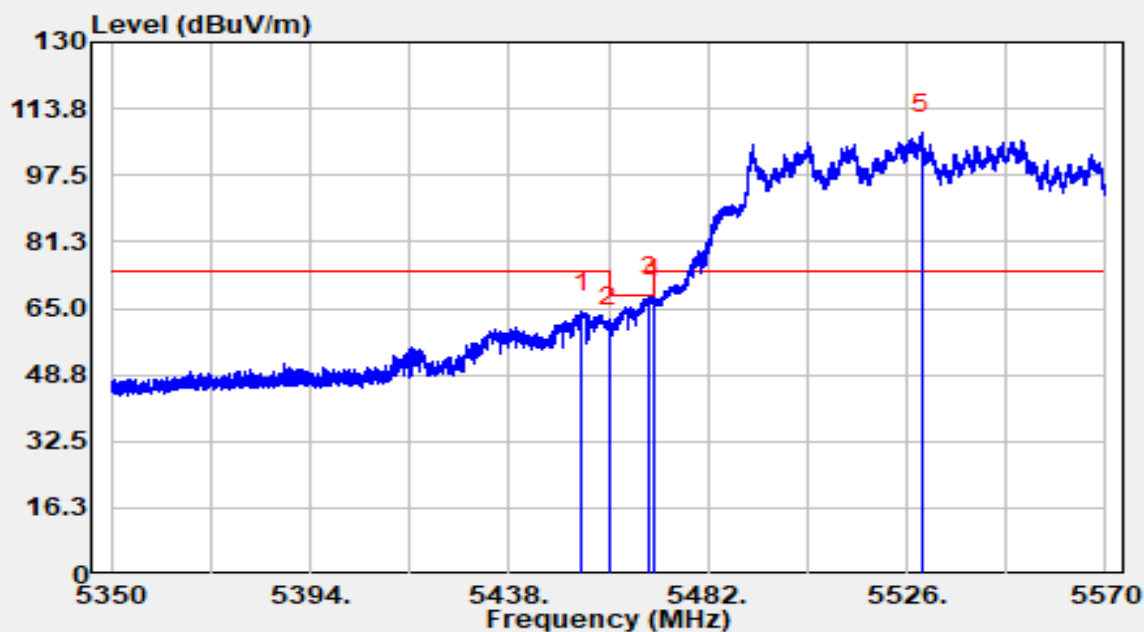


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.148	67.09	-2.99	64.10	-9.90	74.00	Peak
2		5460.000	63.31	-2.55	60.76	-7.44	68.20	Peak
3	*	5469.064	68.77	-1.06	67.72	-0.48	68.20	Peak
4		5470.000	68.13	-0.76	67.37	-0.83	68.20	Peak
5		5529.366	59.73	48.06	107.79	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

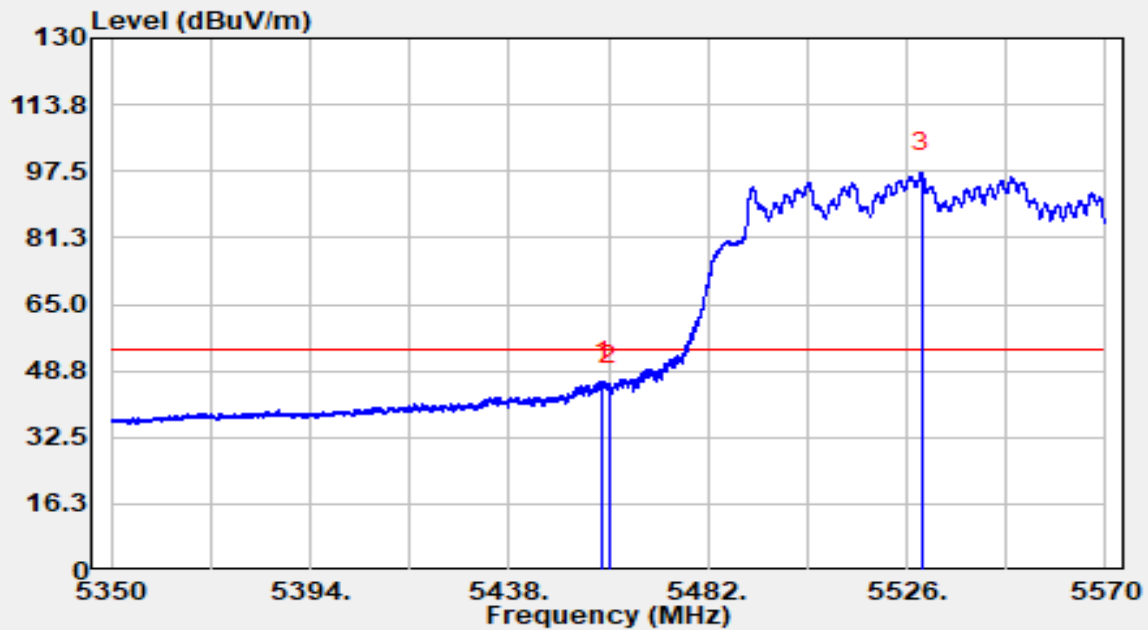


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.636	48.90	-2.68	46.22	-7.78	54.00	Average
2		5460.000	48.14	-2.55	45.58	-8.42	54.00	Average
3		5529.366	49.24	48.06	97.30	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

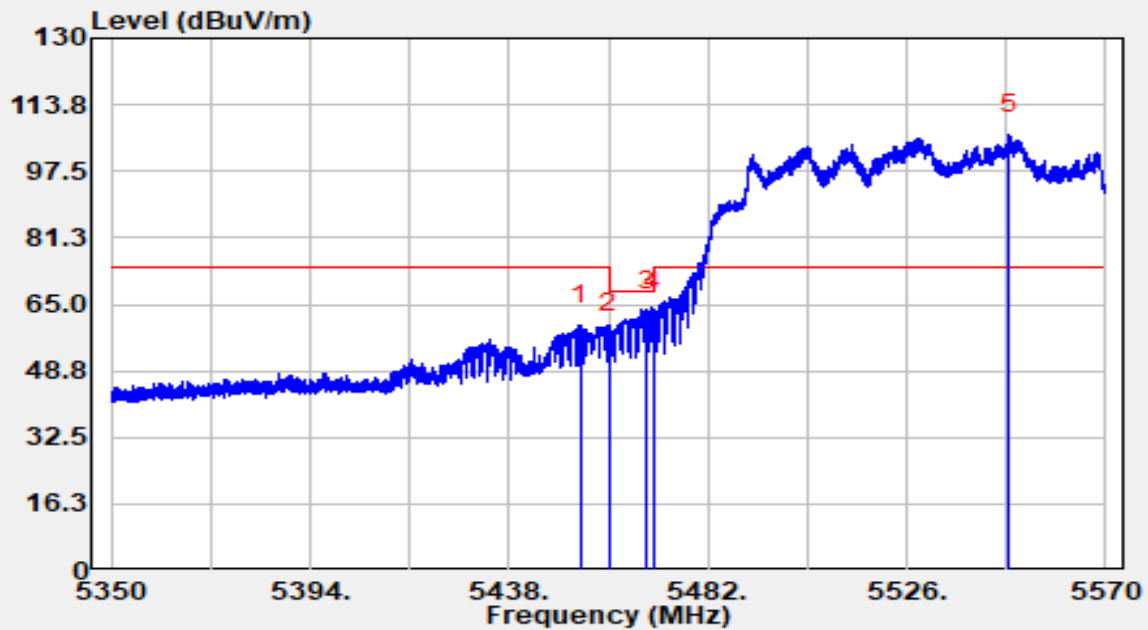


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.774	62.93	-3.00	59.94	-14.06	74.00	Peak
2		5460.000	60.49	-2.55	57.93	-10.27	68.20	Peak
3		5468.624	64.85	-1.23	63.62	-4.58	68.20	Peak
4	*	5470.000	64.39	-0.76	63.63	-4.57	68.20	Peak
5		5548.682	62.60	44.06	106.65	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

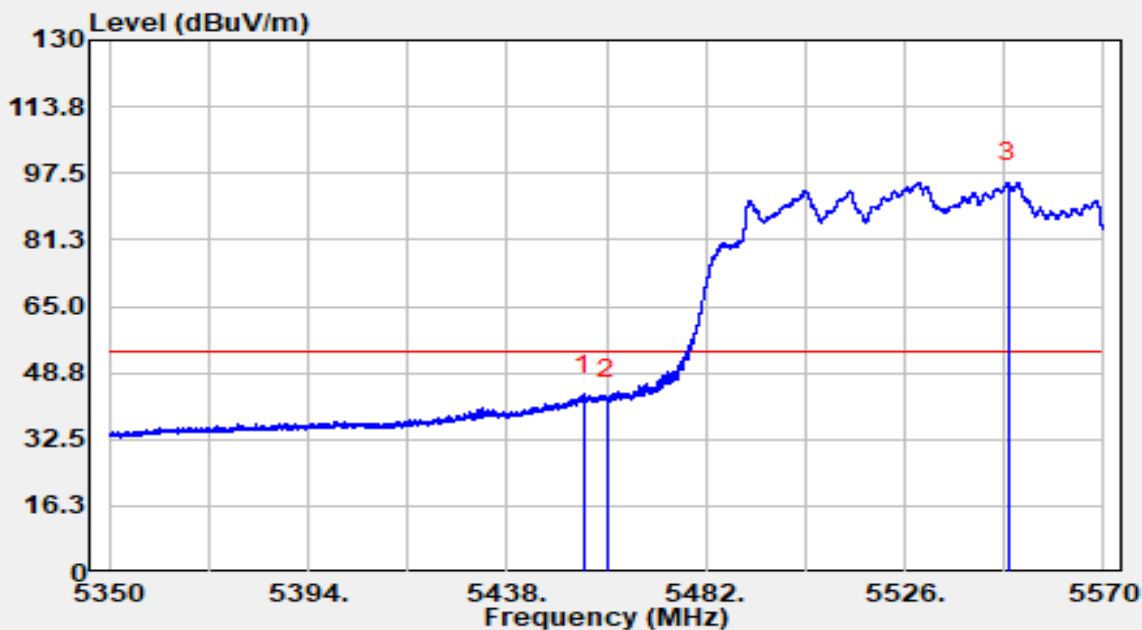


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.962	46.50	-2.93	43.57	-10.43	54.00	Average
2		5460.000	45.17	-2.55	42.62	-11.38	54.00	Average
3		5548.770	51.13	44.13	95.26	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

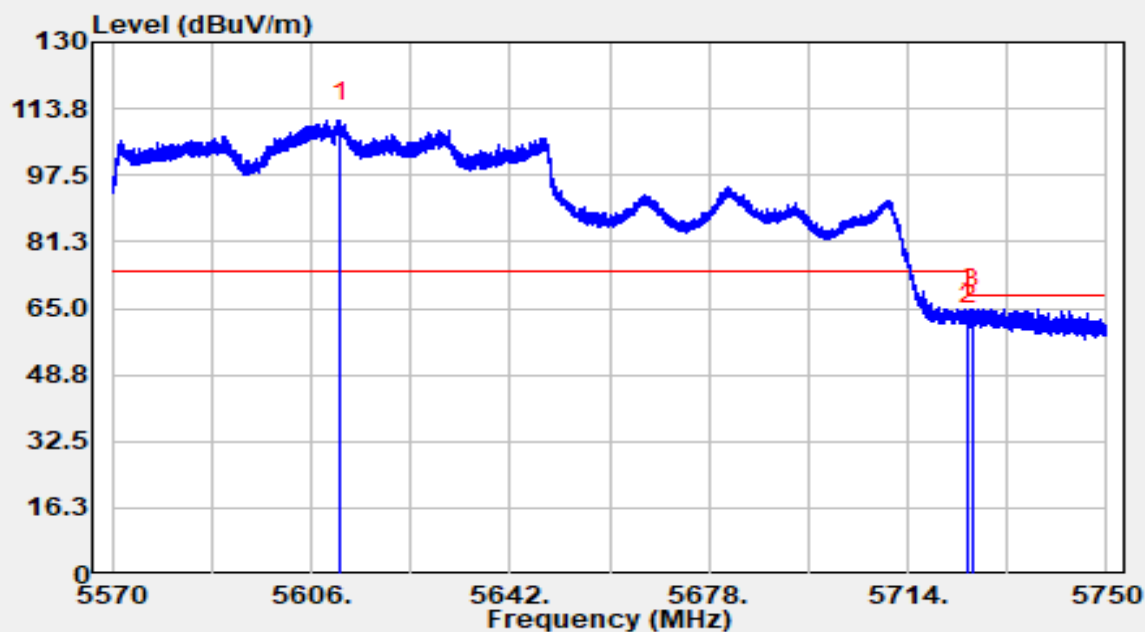


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5611.238	61.94	48.87	110.81	N/A	N/A	Peak
2		5725.000	61.86	-0.89	60.96	-7.24	68.20	Peak
3	*	5725.718	66.18	-1.29	64.89	-3.31	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

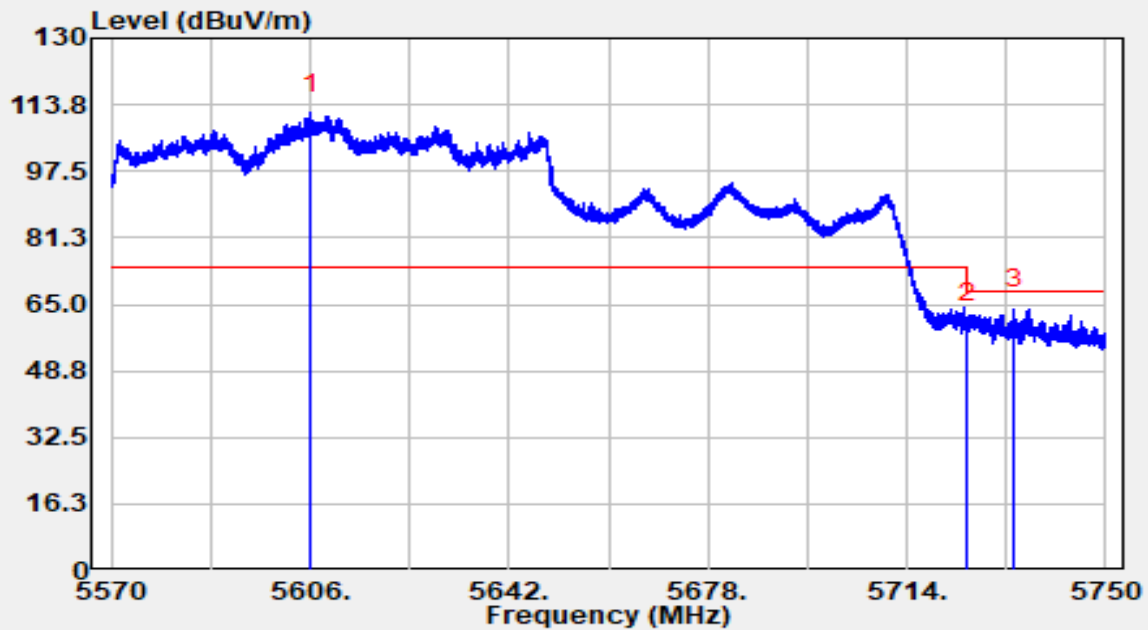


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5606.234	70.54	41.19	111.73	N/A	N/A	Peak
2		5725.000	61.26	-0.89	60.36	-7.84	68.20	Peak
3	*	5733.386	67.19	-3.19	64.00	-4.20	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC Part15E_5.8G Band4	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

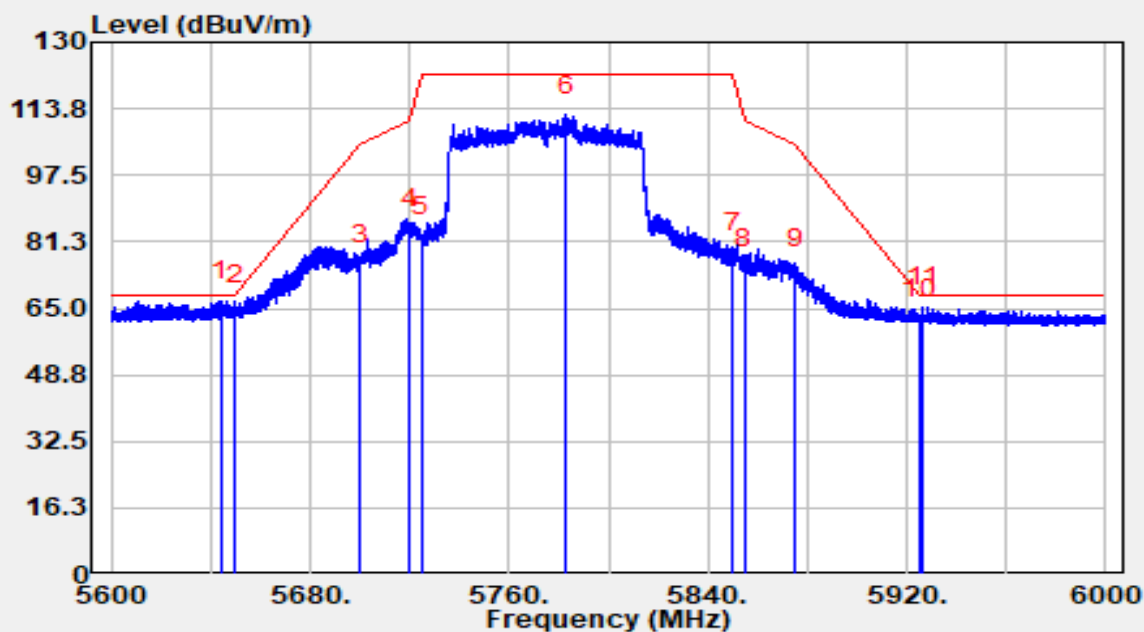


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.200	72.28	-5.43	66.86	-1.34	68.20	Peak
2		5650.000	71.52	-5.42	66.10	-2.10	68.20	Peak
3		5700.000	81.07	-5.43	75.64	-29.56	105.20	Peak
4		5720.000	89.84	-5.37	84.48	-26.32	110.80	Peak
5		5725.000	87.86	-5.37	82.50	-39.70	122.20	Peak
6		5782.920	117.93	-5.60	112.33	N/A	N/A	Peak
7		5850.000	84.61	-5.64	78.98	-43.22	122.20	Peak
8		5855.000	80.72	-5.69	75.03	-35.77	110.80	Peak
9		5875.000	80.50	-5.74	74.76	-30.44	105.20	Peak
10		5925.000	68.12	-5.59	62.53	-5.67	68.20	Peak
11		5926.600	71.05	-5.57	65.48	-2.72	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC Part15E_5.8G Band4	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

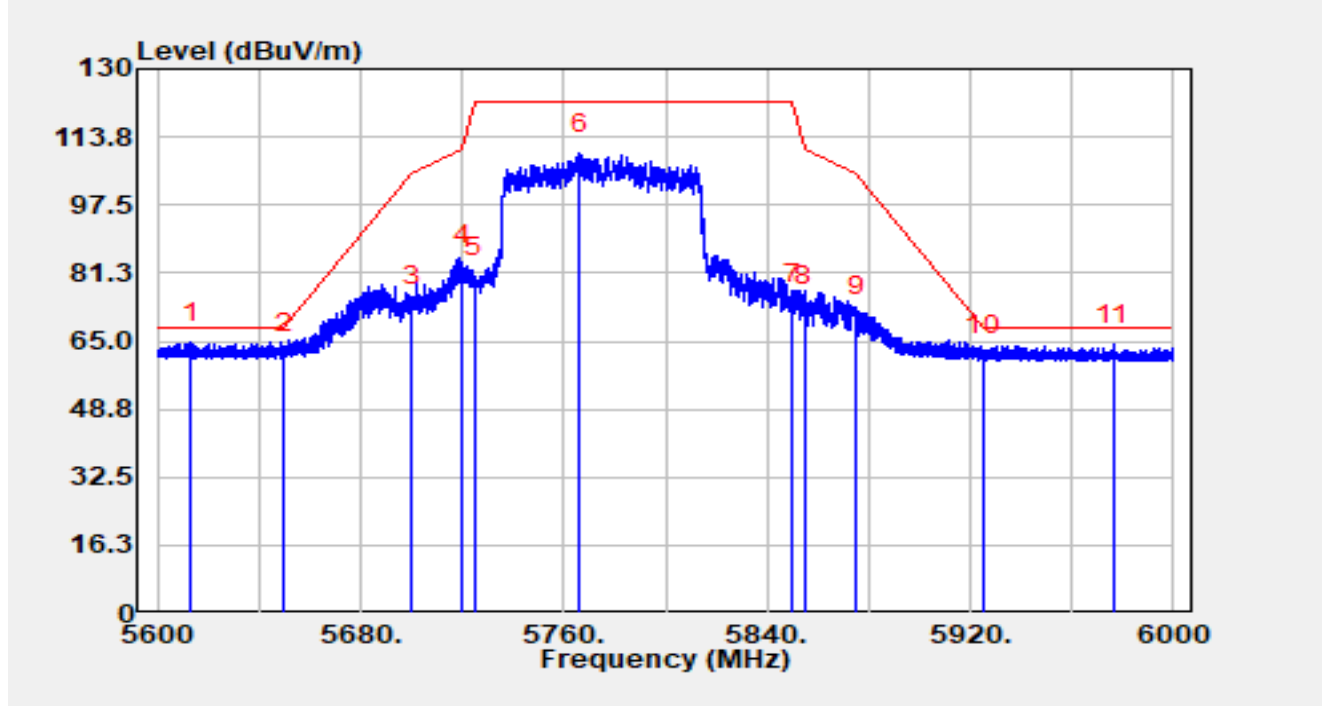


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.040	70.01	-5.28	64.73	-3.47	68.20	Peak
2		5650.000	67.51	-5.42	62.09	-6.11	68.20	Peak
3		5700.000	78.97	-5.43	73.55	-31.65	105.20	Peak
4		5720.000	88.37	-5.37	83.00	-27.80	110.80	Peak
5		5725.000	85.71	-5.37	80.34	-41.86	122.20	Peak
6		5766.440	115.37	-5.61	109.77	N/A	N/A	Peak
7		5850.000	79.30	-5.64	73.67	-48.53	122.20	Peak
8		5855.000	79.05	-5.69	73.37	-37.43	110.80	Peak
9		5875.000	76.62	-5.74	70.88	-34.32	105.20	Peak
10		5925.000	67.24	-5.59	61.65	-6.55	68.20	Peak
11		5976.160	69.91	-5.65	64.26	-3.94	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.

2. $C.F (dB/m) = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 16dB \text{ Attenuation (dB)} - AMP (dB).$
3. $\text{Measurement (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + C.F (dB/m).$

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

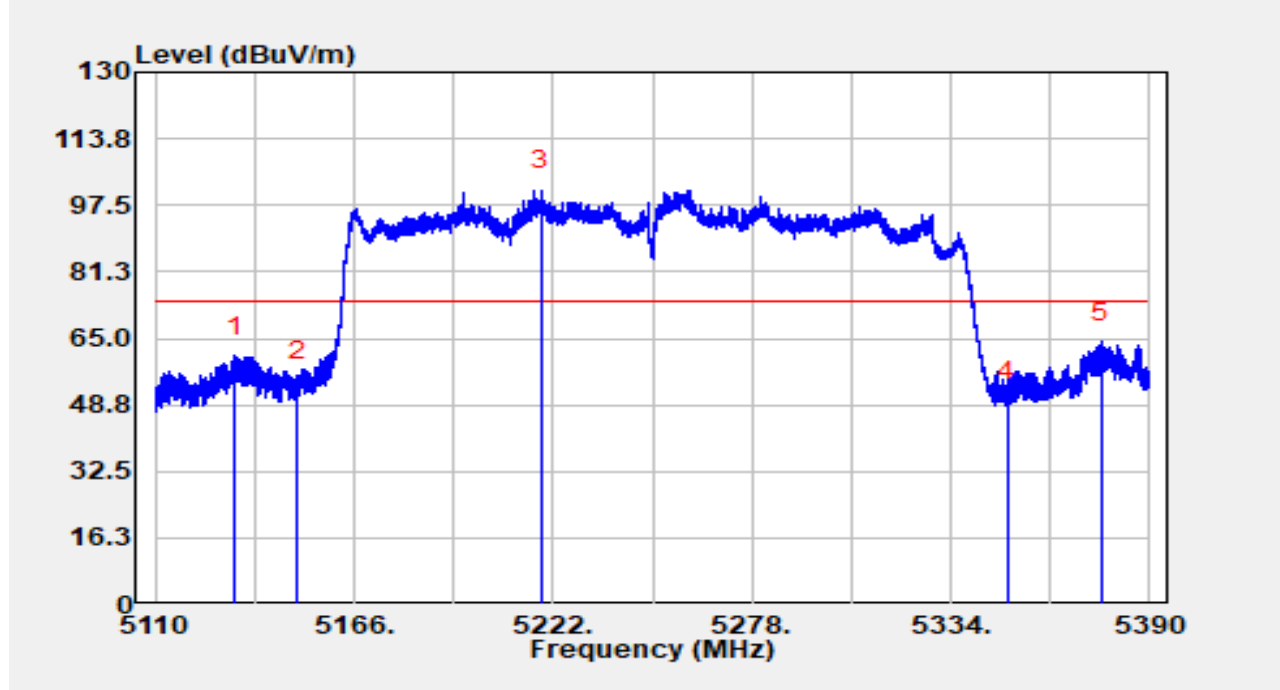


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5132.596	64.55	-3.78	60.77	-13.23	74.00	Peak
2		5150.000	57.02	-2.21	54.81	-19.19	74.00	Peak
3		5218.668	57.11	43.97	101.08	N/A	N/A	Peak
4		5350.000	51.30	-1.38	49.92	-24.08	74.00	Peak
5	*	5376.420	68.24	-4.11	64.13	-9.87	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

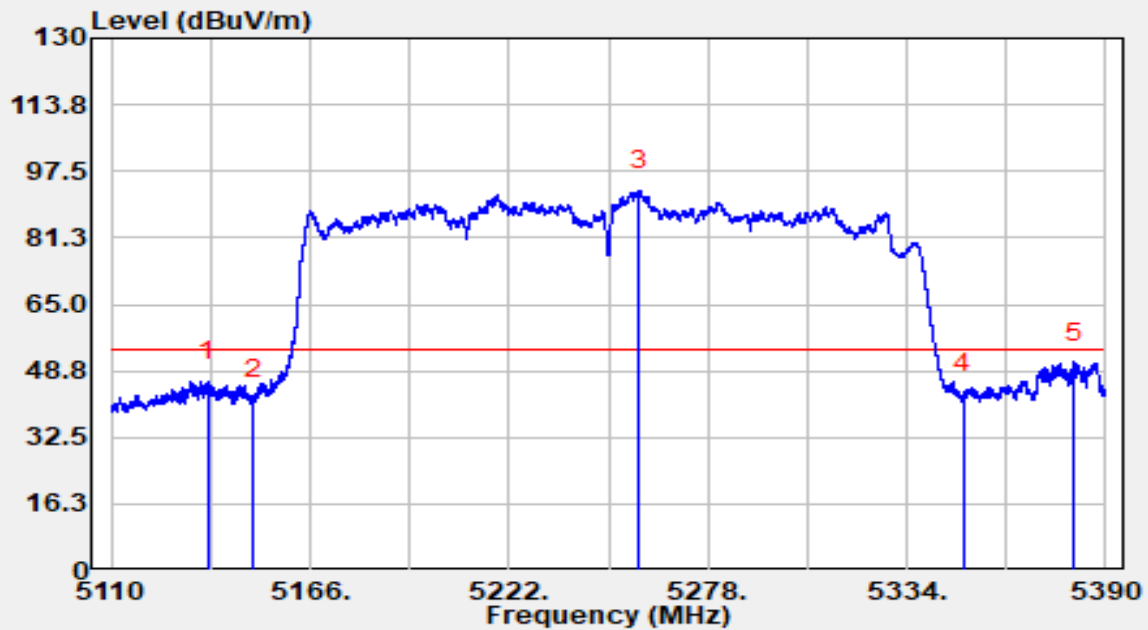


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5137.160	49.67	-3.52	46.16	-7.84	54.00	Average
2		5150.000	44.35	-2.21	42.14	-11.86	54.00	Average
3		5258.792	47.46	45.44	92.91	N/A	N/A	Average
4		5350.000	44.65	-1.38	43.27	-10.73	54.00	Average
5	*	5381.124	55.12	-4.19	50.92	-3.08	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

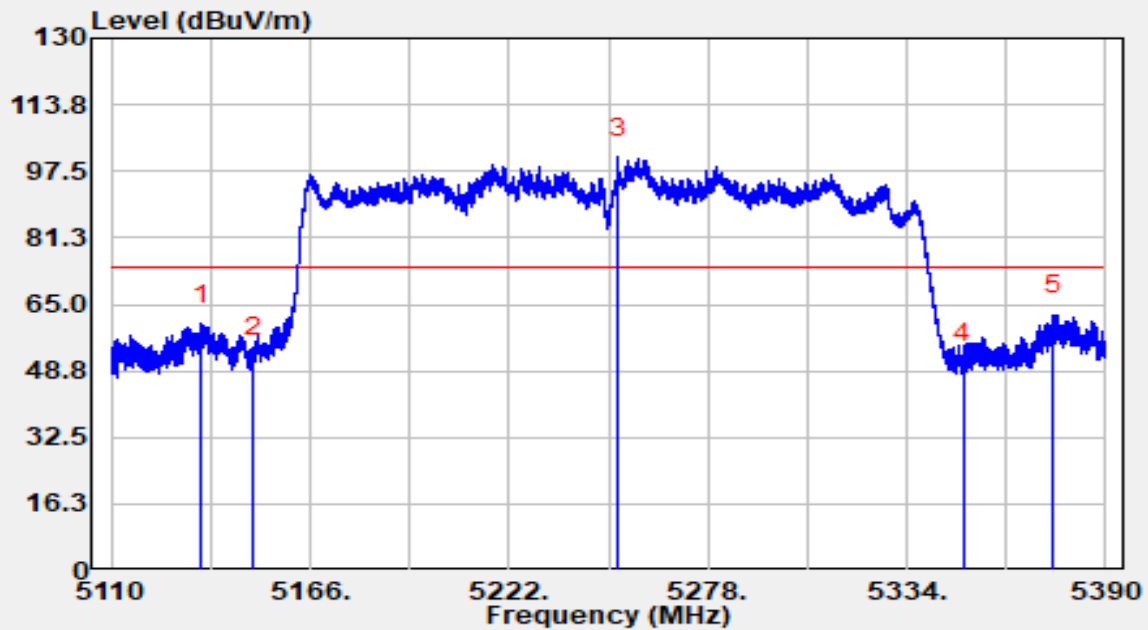


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5135.452	63.71	-3.54	60.17	-13.83	74.00	Peak
2		5150.000	54.49	-2.21	52.28	-21.72	74.00	Peak
3		5252.856	63.25	37.60	100.85	N/A	N/A	Peak
4		5350.000	52.23	-1.38	50.85	-23.15	74.00	Peak
5		5375.356	66.64	-4.14	62.50	-11.50	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	22.5°C	Humidity	51.3%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

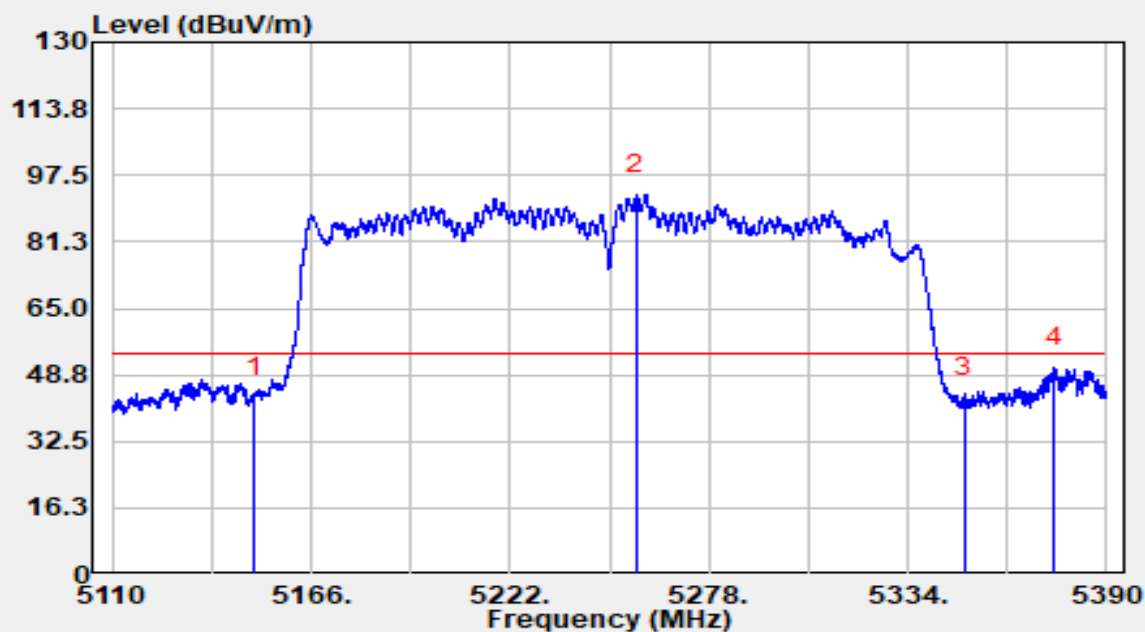


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5150.000	45.66	-2.21	43.44	-10.56	54.00	Average
2	*	5257.700	49.35	43.56	92.91	N/A	N/A	Average
3		5350.000	44.82	-1.38	43.44	-10.56	54.00	Average
4		5375.160	54.87	-4.13	50.74	-3.26	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

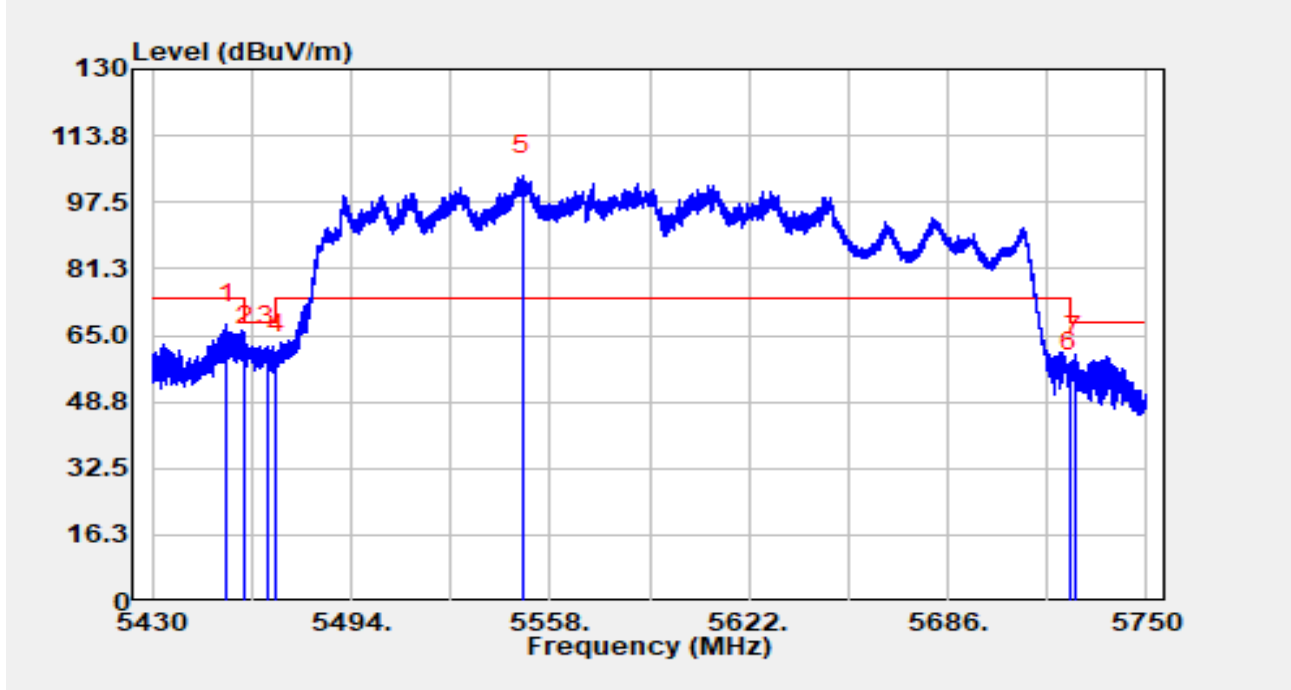


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.936	70.73	-3.00	67.74	-6.26	74.00	Peak
2		5460.000	64.88	-2.55	62.33	-5.87	68.20	Peak
3	*	5467.024	64.18	-1.67	62.52	-5.68	68.20	Peak
4		5470.000	61.21	-0.76	60.45	-7.75	68.20	Peak
5		5549.328	59.30	44.76	104.06	N/A	N/A	Peak
6		5725.000	56.88	-0.89	55.99	-12.21	68.20	Peak
7		5726.960	62.15	-1.84	60.31	-7.89	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

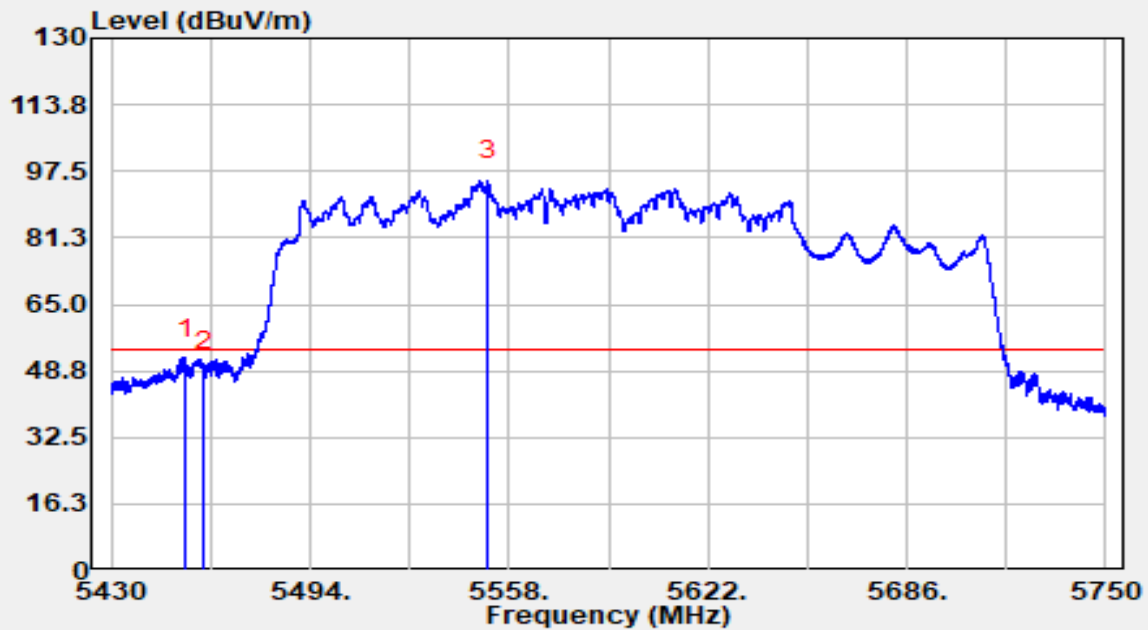


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5453.840	54.97	-3.00	51.97	-2.03	54.00	Average
2		5460.000	51.44	-2.55	48.89	-5.11	54.00	Average
3		5551.056	48.43	46.76	95.19	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

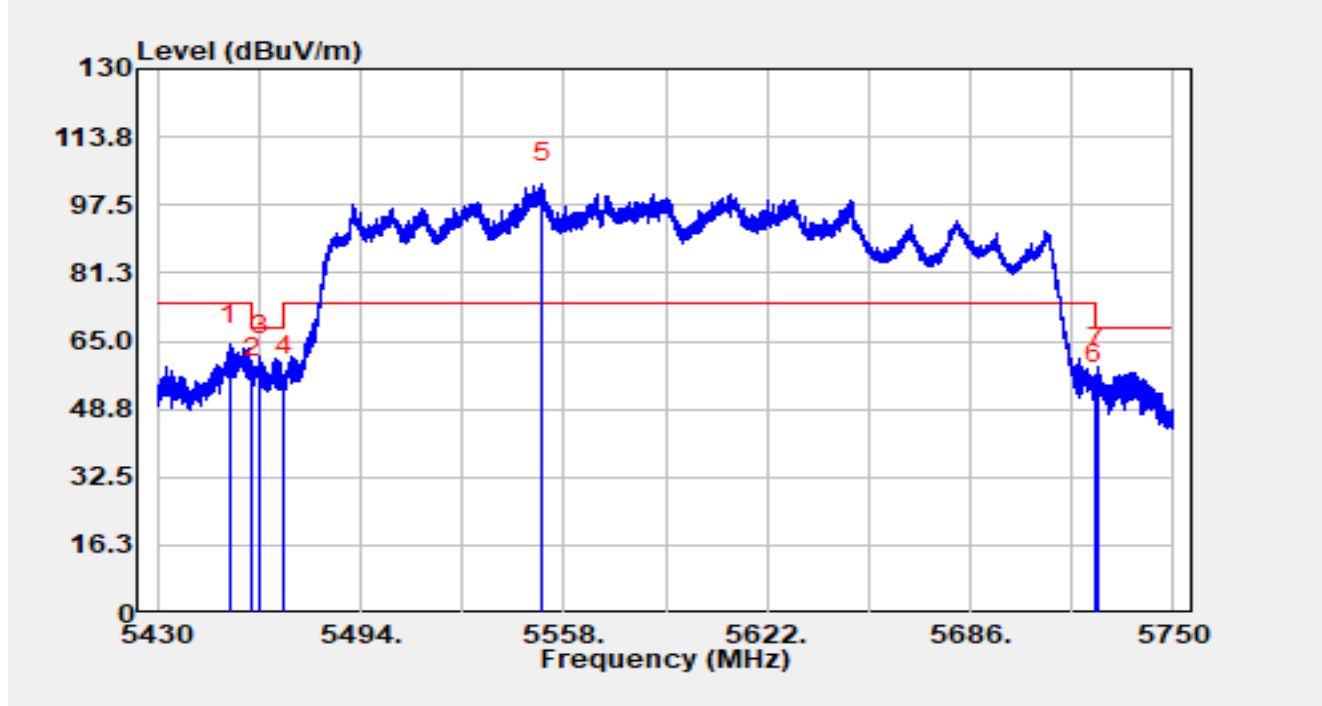


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.656	67.18	-3.04	64.14	-9.86	74.00	Peak
2		5460.000	58.61	-2.55	56.06	-12.14	68.20	Peak
3	*	5462.448	63.78	-2.39	61.39	-6.81	68.20	Peak
4		5470.000	57.59	-0.76	56.83	-11.37	68.20	Peak
5		5551.120	55.89	46.78	102.67	N/A	N/A	Peak
6		5725.000	55.71	-0.89	54.82	-13.38	68.20	Peak
7		5726.000	60.21	-1.45	58.75	-9.45	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-05-20
Temperature	21.5°C	Humidity	54.6%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

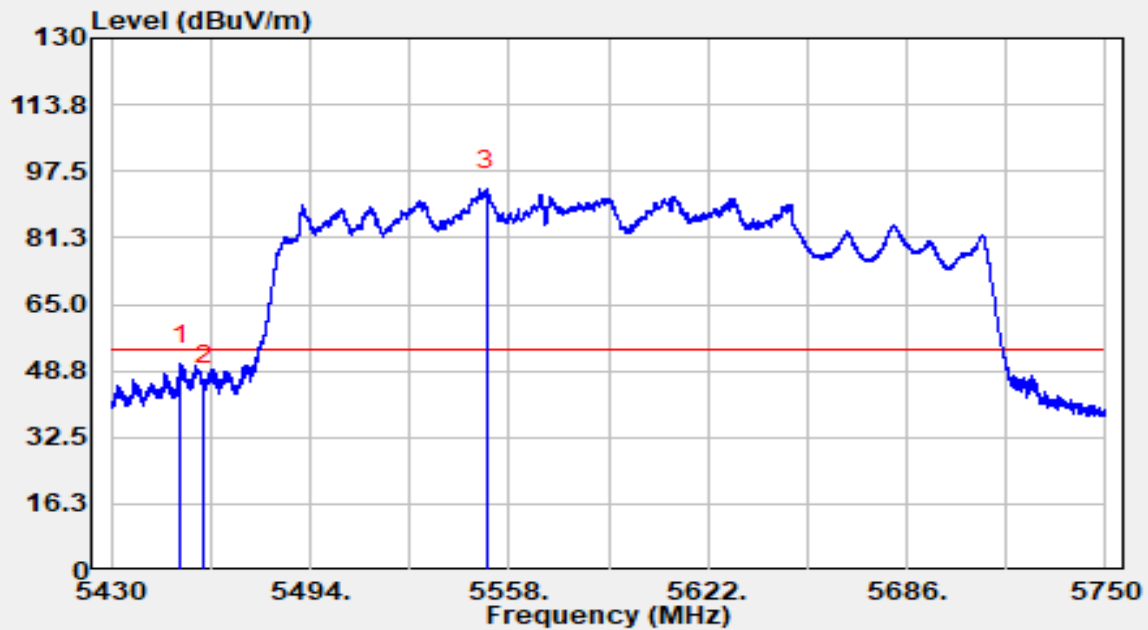


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.464	53.46	-3.04	50.42	-3.58	54.00	Average
2		5460.000	47.79	-2.55	45.24	-8.76	54.00	Average
3		5550.736	46.43	46.61	93.04	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-06-11
Temperature	25.3 °C	Humidity	56.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Miron Ding
Factor	ENV216_101684_E	Polarity	Line
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5580MHz		

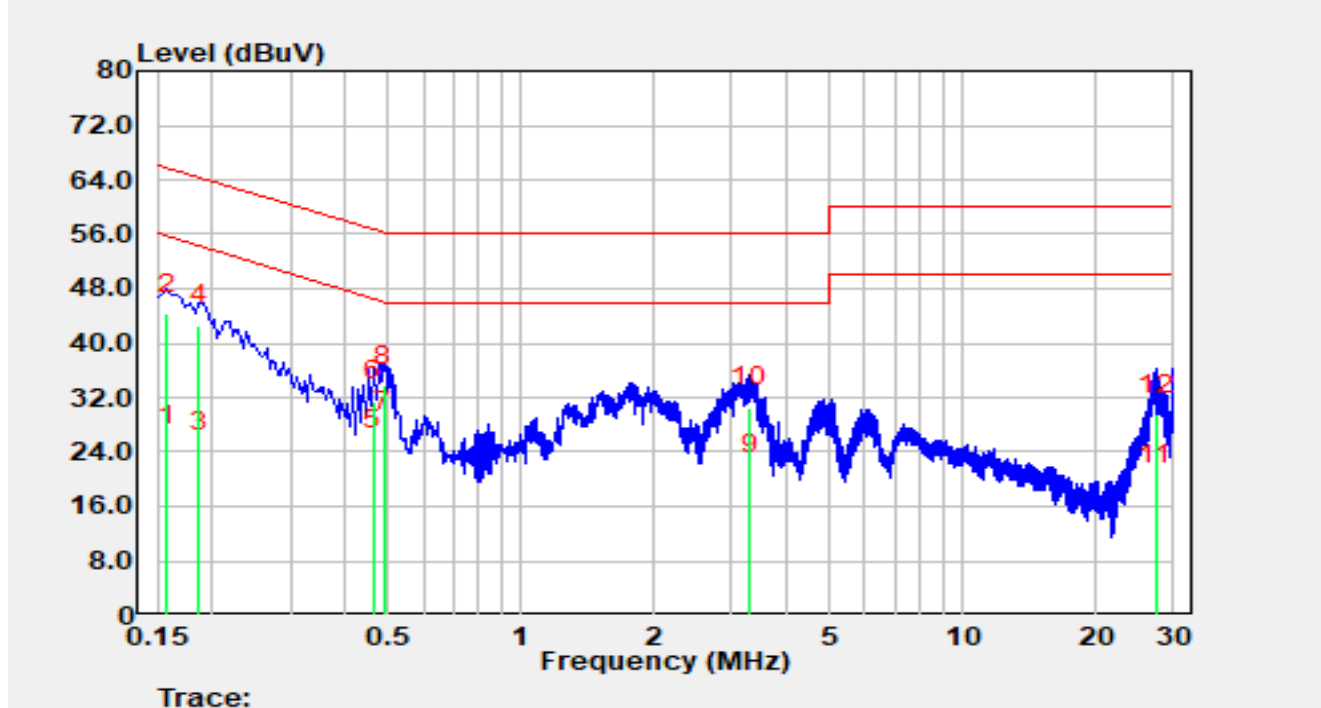


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	15.20	9.81	25.01	-30.56	55.57	Average
2		0.158	34.45	9.81	44.26	-21.31	65.57	QP
3		0.186	14.33	9.82	24.15	-30.06	54.21	Average
4		0.186	32.77	9.82	42.59	-21.62	64.21	QP
5		0.462	14.29	9.93	24.22	-22.44	46.66	Average
6		0.462	21.56	9.93	31.49	-25.17	56.66	QP
7	*	0.490	17.00	9.93	26.93	-19.24	46.17	Average
8		0.490	23.78	9.93	33.71	-22.46	56.17	QP
9		3.302	10.63	10.11	20.74	-25.26	46.00	Average
10		3.302	20.50	10.11	30.61	-25.39	56.00	QP
11		27.416	7.77	11.46	19.23	-30.77	50.00	Average
12		27.416	18.12	11.46	29.58	-30.42	60.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2025-06-11
Temperature	25.3 °C	Humidity	56.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Miron Ding
Factor	ENV216_101684_E	Polarity	Neutral
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5580MHz		

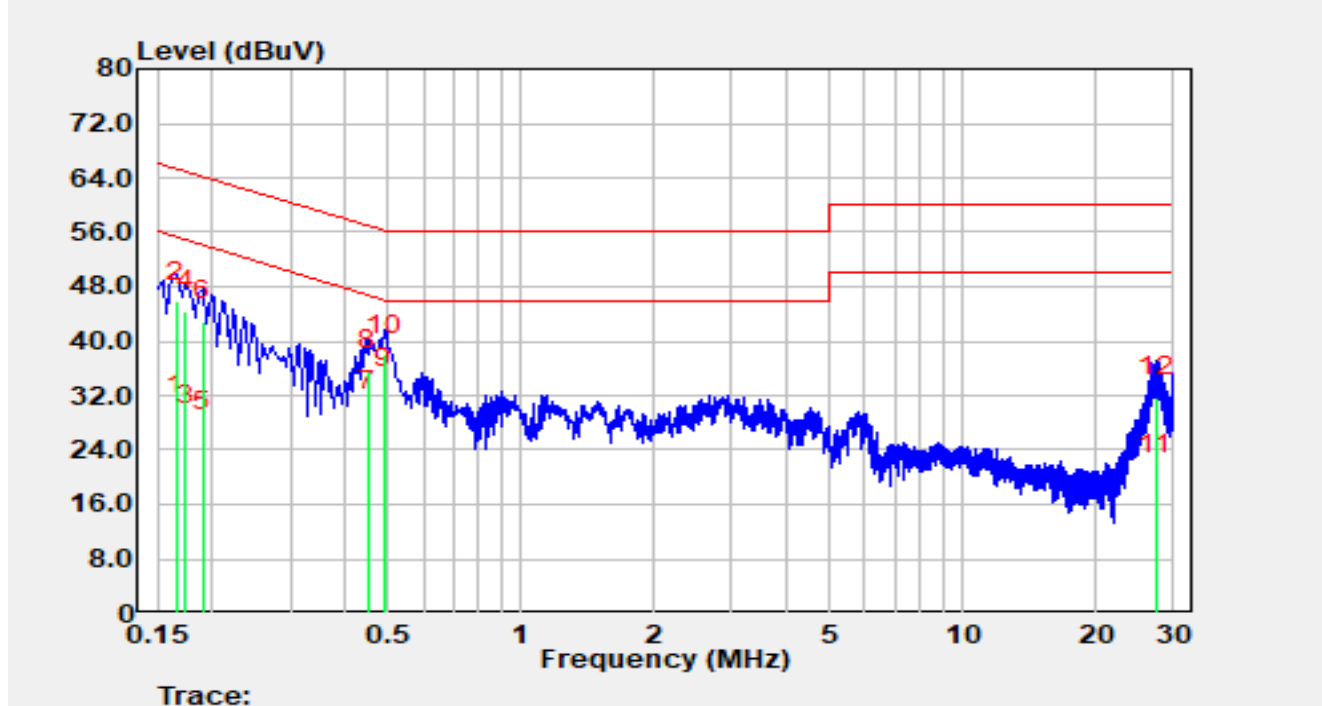

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.166	19.17	9.81	28.98	-26.18	55.16	Average
2		0.166	36.02	9.81	45.83	-19.32	65.16	QP
3		0.174	17.72	9.81	27.53	-27.23	54.77	Average
4		0.174	34.63	9.81	44.44	-20.33	64.77	QP
5		0.190	16.83	9.82	26.66	-27.38	54.04	Average
6		0.190	33.19	9.82	43.02	-21.02	64.04	QP
7		0.450	19.87	9.90	29.77	-17.10	46.88	Average
8		0.450	25.75	9.90	35.65	-21.22	56.88	QP
9	*	0.490	23.11	9.90	33.01	-13.16	46.17	Average
10		0.490	28.10	9.90	38.00	-18.17	56.17	QP
11		27.416	8.98	11.45	20.43	-29.57	50.00	Average
12		27.416	20.39	11.45	31.84	-28.16	60.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1034045-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1034045-UE” file.

The End