



**FCC PART 15
TEST REPORT
No. I15Z43176-EMC01**
for

Huawei Technologies Co., Ltd.

Smart Phone

Model name: EVA-L19

With

FCC ID: QISEVA-L19

Hardware Version: HL1UEVAM

Software Version: A168-L09C900B072

Issued Date: 2016-02-17



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No. 525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P.R.China 100191

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504 Email: cttl_terminals@catr.cn, www.chinattl.com

CONTENTS

CONTENTS	2
1. TEST LATORATORY	8
1.1. TESTING LOCATION	8
1.2. TESTING ENVIRONMENT	8
1.3. PROJECT DATA	8
1.4. SIGNATURE	8
2. CLIENT INFORMATION	9
2.1. APPLICANT INFORMATION	9
2.2. MANUFACTURER INFORMATION	9
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	10
3.1. ABOUT EUT	10
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	10
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	10
3.4. GENERAL DESCRIPTION.....	11
3.5. EUT SET-UPS	11
4. REFERENCE DOCUMENTS.....	12
4.1. DOCUMENTS SUPPLIED BY APPLICANT	12
4.2. REFERENCE DOCUMENTS FOR TESTING.....	12
5. LABORATORY ENVIRONMENT	13
6. SUMMARY OF TEST RESULTS	14
6.1. SUMMARY OF TEST RESULTS	14
6.2. STATEMENTS.....	14
6.3. TEST CONDITIONS	14
7. TEST EQUIPMENTS UTILIZED	15
ANNEX A: MEASUREMENT RESULTS.....	16
A.1. MEASUREMENT METHOD	16
A.2. BAND EDGES COMPLIANCE	17
FIG. 1 BAND EDGES (802.11A, 5180MHz)	18
FIG. 2 BAND EDGES (802.11N-HT20, 5180MHz).....	19
FIG. 3 BAND EDGES (802.11N-HT40, 5190MHz).....	19
FIG. 4 BAND EDGES (802.11AC-HT20, 5180MHz).....	20
FIG. 5 BAND EDGES (802.11AC-HT40, 5190MHz).....	20
FIG. 6 BAND EDGES (802.11A, 5320MHz)	21
FIG. 7 BAND EDGES (802.11N-HT20, 5320MHz).....	21
FIG. 8 BAND EDGES (802.11N-HT40, 5310MHz).....	22
FIG. 9 BAND EDGES (802.11AC-HT20, 5320MHz).....	22

FIG. 10	BAND EDGES (802.11AC-HT40, 5310MHz).....	23
FIG. 11	BAND EDGES (802.11A, 5500MHz)	23
FIG. 12	BAND EDGES (802.11A, 5700MHz)	24
FIG. 13	BAND EDGES (802.11N-HT20, 5500MHz).....	24
FIG. 14	BAND EDGES (802.11N-HT20, 5700MHz).....	25
FIG. 15	BAND EDGES (802.11N-HT40, 5510MHz).....	25
FIG. 16	BAND EDGES (802.11N-HT40, 5670MHz).....	26
FIG. 17	BAND EDGES (802.11AC-HT20, 5500MHz).....	26
FIG. 18	BAND EDGES (802.11AC-HT20, 5700MHz).....	27
FIG. 19	BAND EDGES (802.11AC-HT40, 5510MHz).....	27
FIG. 20	BAND EDGES (802.11AC-HT40, 5670MHz).....	28
FIG. 21	BAND EDGES (802.11AC-HT80, 5210MHz).....	28
FIG. 22	BAND EDGES (802.11AC-HT80, 5290MHz).....	29
FIG. 23	BAND EDGES (802.11AC-HT80, 5530MHz).....	29
A.3. TRANSMITTER SPURIOUS EMISSION		30
FIG. 24	RADIATED SPURIOUS EMISSION (802.11A, CH36, 1 GHz-3 GHz).....	39
FIG. 25	RADIATED SPURIOUS EMISSION (802.11A, CH36, 3 GHz-6 GHz).....	39
FIG. 26	RADIATED SPURIOUS EMISSION (802.11A, CH36, 6 GHz-18 GHz).....	40
FIG. 27	RADIATED SPURIOUS EMISSION (802.11A, CH40, 30 MHz-1 GHz).....	40
FIG. 28	RADIATED SPURIOUS EMISSION (802.11A, CH40, 1 GHz-3GHz)	41
FIG. 29	RADIATED SPURIOUS EMISSION (802.11A, CH40, 3GHz-6GHz)	41
FIG. 30	RADIATED SPURIOUS EMISSION (802.11A, CH40, 6 GHz-18 GHz).....	42
FIG. 31	RADIATED SPURIOUS EMISSION (802.11A, CH40, 18 GHz-26.5 GHz).....	42
FIG. 32	RADIATED SPURIOUS EMISSION (802.11A, CH40, 26.5 GHz-40 GHz).....	43
FIG. 33	RADIATED SPURIOUS EMISSION (802.11A, CH48, 1 GHz-3 GHz).....	43
FIG. 34	RADIATED SPURIOUS EMISSION (802.11A, CH48, 3GHz- 6GHz)	44
FIG. 35	RADIATED SPURIOUS EMISSION (802.11A, CH48, 6 GHz-18GHz)	44
FIG. 36	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH36, 1 GHz-3GHz).....	45
FIG. 37	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH36, 3GHz-6GHz).....	45
FIG. 38	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH36, 6 GHz-18GHz).....	46
FIG. 39	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 30 MHz-1 GHz)	47
FIG. 40	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 1 GHz-3 GHz).....	47
FIG. 41	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 3 GHz-6 GHz).....	47
FIG. 42	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 6 GHz-18 GHz).....	48
FIG. 43	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 18 GHz-26.5 GHz).....	48
FIG. 44	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 26.5 GHz-40 GHz).....	49
FIG. 45	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH48, 1 GHz-3GHz).....	49
FIG. 46	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH48, 3 GHz-6GHz).....	50
FIG. 47	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH48, 6 GHz-18 GHz).....	50
FIG. 48	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH36, 30 MHz-1 GHz)	51
FIG. 49	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH36, 1 GHz-3GHz).....	51
FIG. 50	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH36, 3 GHz-6GHz).....	52
FIG. 51	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH36, 6 GHz-18 GHz).....	52
FIG. 52	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH36, 18 GHz-26.5 GHz).....	53

FIG. 53	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH36, 26.5 GHz-40 GHz).....	53
FIG. 54	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH44, 1 GHz-3GHz).....	54
FIG. 55	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH44, 3GHz-6GHz).....	54
FIG. 56	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH44, 6 GHz-18 GHz).....	55
FIG. 57	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH36, 1 GHz-3 GHz).....	55
FIG. 58	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH36, 3 GHz-6 GHz).....	56
FIG. 59	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH36, 6 GHz-18GHz).....	56
FIG. 60	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH40, 30 MHz-1 GHz)	57
FIG. 61	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH40, 1 GHz-3 GHz).....	57
FIG. 62	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH40, 3 GHz-6 GHz).....	58
FIG. 63	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH40, 6 GHz-18 GHz).....	58
FIG. 64	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH40, 18 GHz-26.5 GHz).....	59
FIG. 65	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH40, 26.5 GHz-40 GHz).....	59
FIG. 66	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH48, 1 GHz-3GHz).....	60
FIG. 67	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH48, 3 GHz-6GHz).....	60
FIG. 68	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH48, 6 GHz-18 GHz).....	61
FIG. 69	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH36, 30 MHz-1 GHz)	61
FIG. 70	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH38, 1 GHz-3 GHz).....	62
FIG. 71	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH36, 3 GHz-6 GHz).....	62
FIG. 72	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH38, 6 GHz-18 GHz).....	63
FIG. 73	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH36, 18 GHz-26.5 GHz).....	63
FIG. 74	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH36, 26.5 GHz-40 GHz).....	64
FIG. 75	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH44, 1 GHz-3 GHz).....	64
FIG. 76	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH44, 3 GHz-6 GHz).....	65
FIG. 77	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH46, 6 GHz-18 GHz).....	65
FIG. 78	RADIATED SPURIOUS EMISSION (802.11A, CH52, 1 GHz-3 GHz).....	75
FIG. 79	RADIATED SPURIOUS EMISSION (802.11A, CH52, 3 GHz-6 GHz).....	75
FIG. 80	RADIATED SPURIOUS EMISSION (802.11A, CH52, 6 GHz-18 GHz).....	76
FIG. 81	RADIATED SPURIOUS EMISSION (802.11A, CH56, 30 MHz-1 GHz).....	76
FIG. 82	RADIATED SPURIOUS EMISSION (802.11A, CH56, 1 GHz-3 GHz).....	77
FIG. 83	RADIATED SPURIOUS EMISSION (802.11A, CH56, 3 GHz-6 GHz).....	77
FIG. 84	RADIATED SPURIOUS EMISSION (802.11A, CH56, 6 GHz-18 GHz).....	78
FIG. 85	RADIATED SPURIOUS EMISSION (802.11A, CH56, 18 GHz-26.5 GHz).....	78
FIG. 86	RADIATED SPURIOUS EMISSION (802.11A, CH56, 26.5 GHz-40 GHz).....	79
FIG. 87	RADIATED SPURIOUS EMISSION (802.11A, CH64, 1 GHz-3 GHz).....	79
FIG. 88	RADIATED SPURIOUS EMISSION (802.11A, CH64, 3GHz- 6 GHz).....	80
FIG. 89	RADIATED SPURIOUS EMISSION (802.11A, CH64, 6 GHz-18GHz)	80
FIG. 90	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH52, 1 GHz-3 GHz)	81
FIG. 91	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH52, 3 GHz-6GHz).....	81
FIG. 92	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH52, 6 GHz-18GHz).....	82
FIG. 93	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 30 MHz-1 GHz)	82
FIG. 94	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 1 GHz-3 GHz).....	83
FIG. 95	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 3GHz-6 GHz).....	83
FIG. 96	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 6 GHz-18 GHz).....	84

FIG. 97	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 18 GHz-26.5 GHz).....	84
FIG. 98	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 26.5 GHz-40 GHz).....	85
FIG. 99	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH64, 1 GHz-3GHz).....	85
FIG. 100	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH64, 3 GHz-6GHz).....	86
FIG. 101	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH64, 6 GHz-18 GHz).....	86
FIG. 102	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH52, 30 MHz-1 GHz)	87
FIG. 103	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH52, 1 GHz-3 GHz)	87
FIG. 104	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH52, 3 GHz-6 GHz).....	88
FIG. 105	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH52, 6 GHz-18 GHz).....	88
FIG. 106	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH52, 18 GHz-26.5 GHz).....	89
FIG. 107	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH52, 26.5 GHz-40 GHz).....	89
FIG. 108	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH60, 1 GHz-3 GHz)	90
FIG. 109	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH60, 3 GHz-6 GHz)	90
FIG. 110	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH60, 6 GHz-18 GHz).....	91
FIG. 111	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH52, 1 GHz-3 GHz).....	91
FIG. 112	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH52, 3 GHz-6 GHz).....	92
FIG. 113	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH52, 6 GHz-18GHz).....	92
FIG. 114	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH56, 30 MHz-1 GHz)	93
FIG. 115	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH56, 1 GHz-3 GHz).....	93
FIG. 116	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH56, 3 GHz-6 GHz).....	94
FIG. 117	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH56, 6 GHz-18 GHz).....	94
FIG. 118	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH56, 18 GHz-26.5 GHz).....	95
FIG. 119	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH56, 26.5 GHz-40 GHz).....	95
FIG. 120	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH64, 1 GHz-3GHz).....	96
FIG. 121	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH64, 3 GHz-6GHz).....	96
FIG. 122	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH64, 6 GHz-18 GHz).....	97
FIG. 123	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH52, 30 MHz-1 GHz)	97
FIG. 124	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH52, 1 GHz-3 GHz).....	98
FIG. 125	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH52, 3 GHz-6 GHz).....	98
FIG. 126	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH52, 6 GHz-18 GHz).....	99
FIG. 127	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH52, 18 GHz-26.5 GHz).....	99
FIG. 128	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH52, 26.5 GHz-40 GHz).....	100
FIG. 129	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH60, 1 GHz-3 GHz).....	100
FIG. 130	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH60, 3GHz-6 GHz).....	101
FIG. 131	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH60, 6 GHz-18 GHz).....	101
FIG. 132	RADIATED SPURIOUS EMISSION (802.11A, CH100, 1 GHz-3 GHz).....	113
FIG. 133	RADIATED SPURIOUS EMISSION (802.11A, CH100, 3 GHz-6GHz)	113
FIG. 134	RADIATED SPURIOUS EMISSION (802.11A, CH100, 6 GHz-18 GHz).....	114
FIG. 135	RADIATED SPURIOUS EMISSION (802.11A, CH120, 30 MHz-1 GHz)	114
FIG. 136	RADIATED SPURIOUS EMISSION (802.11A, CH120, 1 GHz-3 GHz).....	115
FIG. 137	RADIATED SPURIOUS EMISSION (802.11A, CH120, 3 GHz-6GHz)	115
FIG. 138	RADIATED SPURIOUS EMISSION (802.11A, CH120, 6 GHz-18 GHz).....	116
FIG. 139	RADIATED SPURIOUS EMISSION (802.11A, CH120, 18 GHz-26.5 GHz).....	116
FIG. 140	RADIATED SPURIOUS EMISSION (802.11A, CH120, 26.5 GHz-40 GHz).....	117

FIG. 141	RADIATED SPURIOUS EMISSION (802.11A, CH140, 1 GHz-3 GHz).....	117
FIG. 142	RADIATED SPURIOUS EMISSION (802.11A, CH140, 3 GHz-6 GHz).....	118
FIG. 143	RADIATED SPURIOUS EMISSION (802.11A, CH140, 6 GHz-18GHz)	118
FIG. 144	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH100, 1 GHz-3 GHz).....	119
FIG. 145	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH100, 3 GHz-6 GHz).....	119
FIG. 146	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH100, 6 GHz-18GHz).....	120
FIG. 147	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH120, 30 MHz-1 GHz)	120
FIG. 148	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH120 1 GHz-3 GHz).....	121
FIG. 149	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH120 3 GHz-6 GHz).....	121
FIG. 150	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH120, 6 GHz-18 GHz).....	122
FIG. 151	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH120, 18 GHz-26.5 GHz).....	122
FIG. 152	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH120, 26.5 GHz-40 GHz).....	123
FIG. 153	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH140, 1 GHz-3GHz).....	123
FIG. 154	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH140, 3 GHz-6GHz).....	124
FIG. 155	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH140, 6 GHz-18 GHz).....	124
FIG. 156	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH100, 1 GHz-3 GHz).....	125
FIG. 157	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH100, 3 GHz-6 GHz).....	125
FIG. 158	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH100, 6 GHz-18 GHz).....	126
FIG. 159	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH116, 30 MHz-1 GHz).....	126
FIG. 160	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH116, 1 GHz-3 GHz).....	127
FIG. 161	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH116, 3 GHz-6 GHz)	127
FIG. 162	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH116, 6 GHz-18 GHz).....	128
FIG. 163	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH116, 18 GHz-26.5 GHz)	128
FIG. 164	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH116, 26.5 GHz-40 GHz)	129
FIG. 165	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH132, 1 GHz-3 GHz).....	130
FIG. 166	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH132, 3 GHz-6 GHz).....	130
FIG. 167	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH132, 6 GHz-18 GHz).....	130
FIG. 168	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH100, 1 GHz-3 GHz).....	131
FIG. 169	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH100, 3 GHz-6 GHz).....	131
FIG. 170	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH100, 6 GHz-18GHz).....	132
FIG. 171	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH120, 30 MHz-1 GHz)	132
FIG. 172	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH120, 1 GHz-3 GHz).....	133
FIG. 173	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH120, 3 GHz-6 GHz).....	133
FIG. 174	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH120, 6 GHz-18 GHz).....	134
FIG. 175	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH120, 18 GHz-26.5 GHz).....	134
FIG. 176	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH120, 26.5 GHz-40 GHz).....	135
FIG. 177	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH140, 1 GHz-3GHz).....	136
FIG. 178	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH140, 3GHz-6GHz)	136
FIG. 179	RADIATED SPURIOUS EMISSION (802.11AC-HT20, CH140, 6 GHz-18 GHz).....	136
FIG. 180	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH100, 1 GHz-3 GHz).....	137
FIG. 181	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH100, 3 GHz-6 GHz).....	137
FIG. 182	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH100, 6 GHz-18 GHz).....	138
FIG. 183	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH116, 30 MHz-1 GHz)	138
FIG. 184	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH116, 1 GHz-3 GHz).....	139

FIG. 185	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH116, 3 GHz-6 GHz)	139
FIG. 186	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH116, 6 GHz-18 GHz)	140
FIG. 187	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH116, 18 GHz-26.5 GHz)	140
FIG. 188	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH116, 26.5 GHz-40 GHz)	141
FIG. 189	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH132, 1 GHz-3 GHz)	141
FIG. 190	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH132, 3 GHz-6 GHz)	142
FIG. 191	RADIATED SPURIOUS EMISSION (802.11AC-HT40, CH132, 6 GHz-18 GHz)	142
FIG. 192	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH36, 1 GHz-3 GHz)	146
FIG. 193	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH36, 3 GHz-6 GHz)	146
FIG. 194	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH36, 6 GHz-18 GHz)	147
FIG. 195	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH52, 30 MHz-1 GHz)	147
FIG. 196	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH52, 1 GHz-3 GHz)	148
FIG. 197	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH52, 3 GHz-6 GHz)	148
FIG. 198	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH52, 6 GHz-18 GHz)	149
FIG. 199	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH52, 18 GHz-26.5 GHz)	149
FIG. 200	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH58, 26.5 GHz-40 GHz)	150
FIG. 201	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH100, 1 GHz-3 GHz)	150
FIG. 202	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH100, 3 GHz-6 GHz)	151
FIG. 203	RADIATED SPURIOUS EMISSION (802.11AC-HT80, CH100, 6 GHz-18 GHz)	151
A.4.	SPURIOUS EMISSIONS RADIATED < 30MHz	152
FIG. 204	RADIATED SPURIOUS EMISSION (802.11A, CH40, 9 kHz ~30 MHz)	152

1. TEST LATORATORY

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 4: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.2. Testing Environment

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2016-01-12

Testing End Date: 2016-02-03


1.4. Signature



Wang Junqing
(Prepared this test report)



Qu Pengfei
(Reviewed this test report)



Liu Baodian
Deputy Director of the laboratory
(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: Huawei Technologies Co.,Ltd
Address /Post: Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District Shenzhen China
City: Shenzhen
Postal Code: 518129
Country: China
Contact Person: zhangheng
Contact Email: ivy.zhangheng@huawei.com
Telephone: 18121057839/021-61752571
Fax: /

2.2. Manufacturer Information

Company Name: Huawei Technologies Co.,Ltd
Address /Post: Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District Shenzhen China
City: Shenzhen
Postal Code: 518129
Country: China
Contact Person: zhangheng
Contact Email: ivy.zhangheng@huawei.com
Telephone: 18121057839/021-61752571
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart Phone
Model name	EVA-L19
FCC ID	QISEVA-L19
WLAN Frequency Range	ISM Bands: 5150MHz~5250MHz, 5250MHz~5350MHz, 5470MHz~5725MHz
Type of modulation	OFDM
Antenna	Integral Antenna

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of telecommunication Research, MIIT.

3.2. Internal Identification of EUT used during the test

EUT ID*	S/N	HW Version	SW Version
EUT1	869827020008203	HL1UEVAM	A168-L09C900B072

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	Note
AE1	battery	/	Inbuilt
AE2	Travel Charger	HW-050200C01	1543176CH003
AE3	USB Cable	/	1543176DC003

AE1

Model	HB366481ECW
Manufacturer	Huawei
Capacitance	2900mAh
Nominal voltage	3.82V

AE2

Model	HW-050200C01
Manufacturer	Hangjia
Length of cable	/

AE3

Model	/
Manufacturer	/
Length of cable	100cm

*AE ID: is used to identify the test sample in the lab internally.



3.4. General Description

Equipment Under Test (EUT) is model of Smart Phone with integrated antenna and inbuilt battery. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

3.5. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1+ AE2 +AE3	Charger



4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
FCC Part15	15.209 Radiated emission limits, general requirements;	2014
	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
KDB 789033 D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E	June 2014

5. LABORATORY ENVIRONMENT

Semi/full-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Semi-anechoic chamber SAC-2 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Band edge compliance	15.209	/	P
Transmitter spurious emissions radiated	15.407	/	P
Spurious emissions radiated < 30 MHz	15.407	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacture as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	15℃~35℃
Voltage	3.82V
Humidity	15%~75%



7. TEST EQUIPMENTS UTILIZED

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	R&S	2016-10-29	1 Year
2	Test Receiver	FSV40	101047	R&S	2016-07-02	1 Year
3	Loop Antenna	HFH2-Z2	829324/007	R&S	2017-12-16	3 Years
4	EMI Antenna	VULB9163	9163-514	Schwarzbeck	2017-11-24	3 Years
5	EMI Antenna	3117	00139065	ETS-Lindgren	2017-07-01	3 Years
6	EMI Antenna	3116	2661	ETS-Lindgren	2017-06-17	3 Years


ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 40GHz, RBW = 1MHz, VBW = 3MHz;

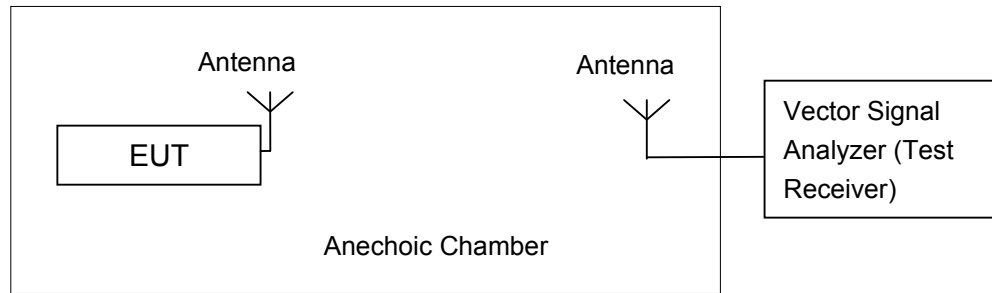

The measurement is made according to KDB 789033

For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m or 10m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Band Edges Compliance

Measurement Limit:

Standard	Limit (dB μ V/m)	
FCC 47 CFR Part 15.209	Peak	74
	Average	54

The measurement is made according to KDB 789033

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

5GHz U-NII 1

Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.1	P
802.11n-HT20	5180 MHz	Fig.2	P
802.11n-HT40	5190 MHz	Fig.3	P
802.11ac-HT20	5180 MHz	Fig.4	P
802.11ac-HT40	5190 MHz	Fig.5	P

5GHz U-NII 2A

Mode	Channel	Test Results	Conclusion
802.11a	5230 MHz	Fig.6	P
802.11n-HT20	5230 MHz	Fig.7	P
802.11n-HT40	5310 MHz	Fig.8	P
802.11ac-HT20	5230 MHz	Fig.9	P
802.11ac-HT40	5310 MHz	Fig.10	P

5GHz U-NII 2C

Mode	Channel	Test Results	Conclusion
802.11a	5500 MHz	Fig.11	P
802.11a	5700 MHz	Fig.12	P
802.11n-HT20	5500 MHz	Fig.13	P
802.11n-HT20	5700 MHz	Fig.14	P
802.11n-HT40	5510 MHz	Fig.15	P
802.11n-HT40	5670 MHz	Fig.16	P
802.11ac-HT20	5500 MHz	Fig.17	P
802.11ac-HT20	5700 MHz	Fig.18	P
802.11ac-HT40	5510 MHz	Fig.19	P
802.11ac-HT40	5670 MHz	Fig.20	P

5GHz 802.11ac 80MHz

Mode	Channel	Test Results	Conclusion
802.11ac-HT80	5210 MHz	Fig.21	P
802.11ac-HT80	5290 MHz	Fig.22	P
802.11ac-HT80	5530 MHz	Fig.23	P

Conclusion: PASS

Test graphs as below:

RE - Power-5.125GHz-5.175GHz

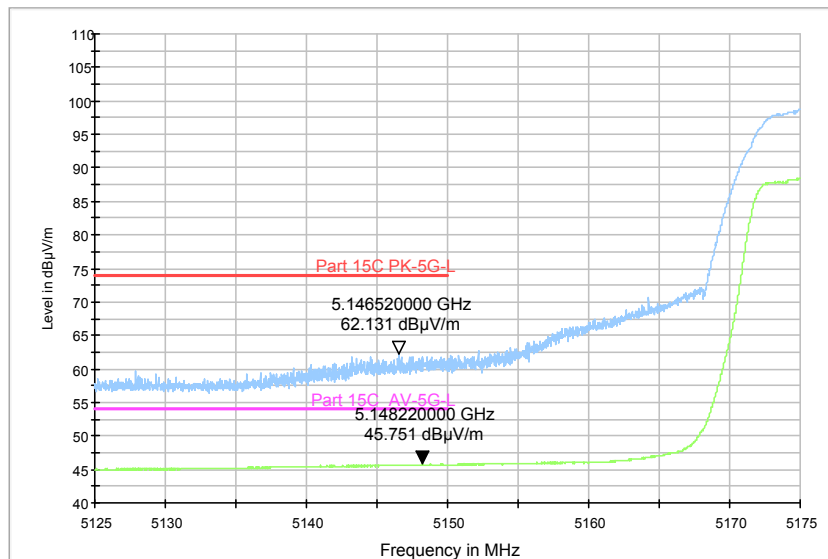


Fig. 1 Band Edges (802.11a, 5180MHz)

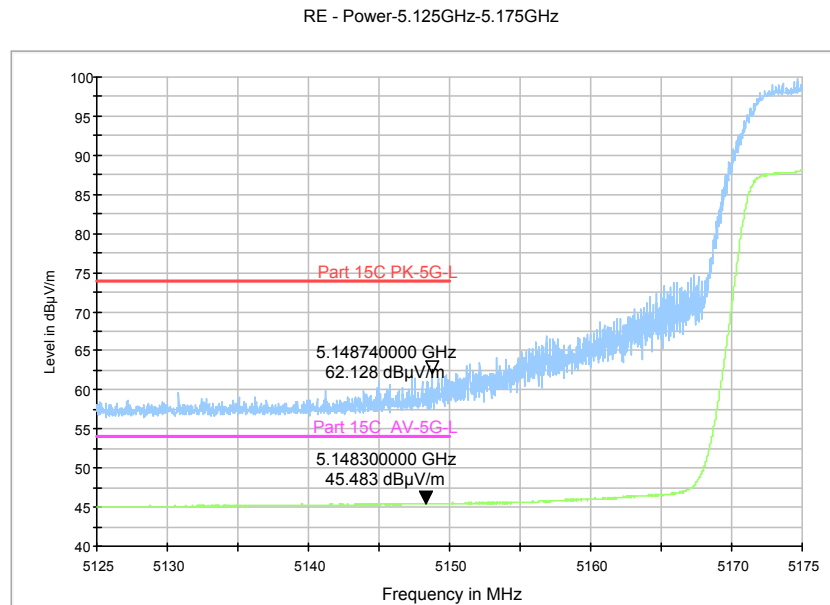


Fig. 2 Band Edges (802.11n-HT20, 5180MHz)

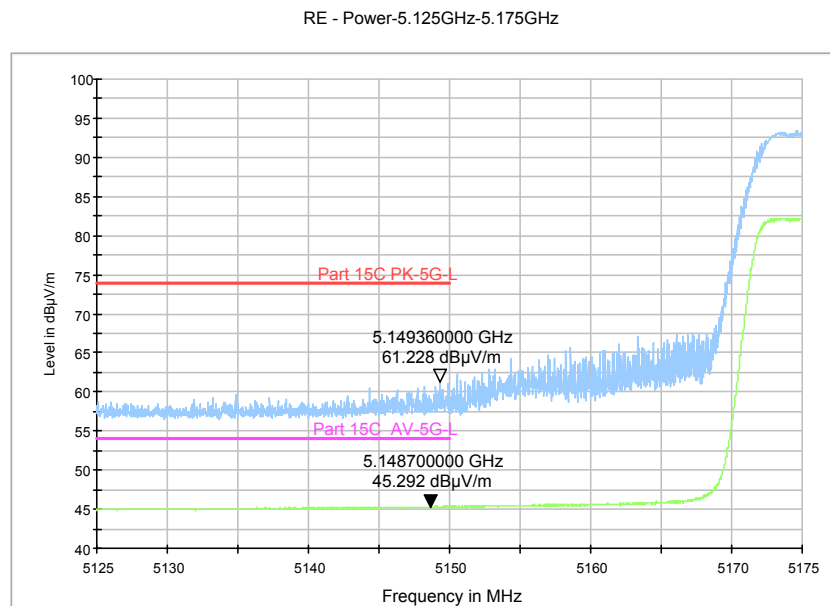


Fig. 3 Band Edges (802.11n-HT40, 5190MHz)

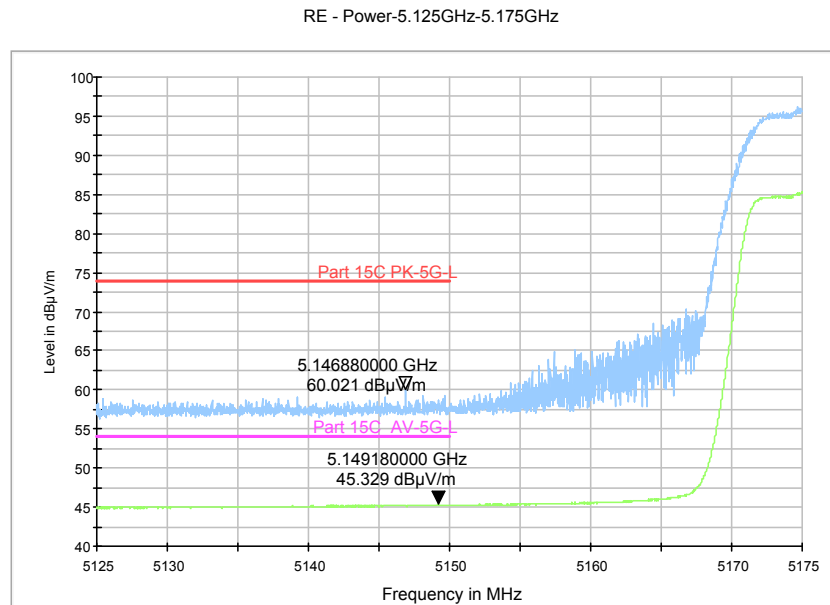


Fig. 4 Band Edges (802.11ac-HT20, 5180MHz)

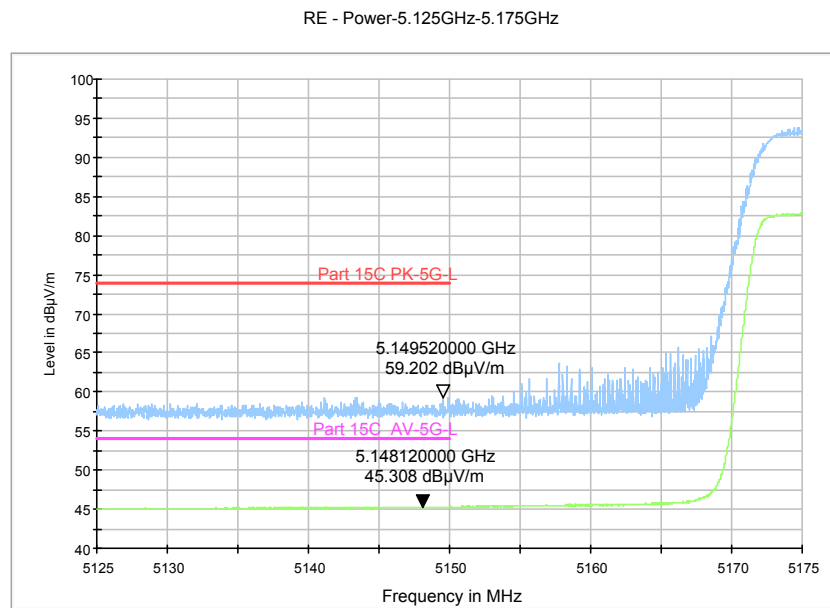


Fig. 5 Band Edges (802.11ac-HT40, 5190MHz)

RE - Power-5.325GHz-5.375GHz

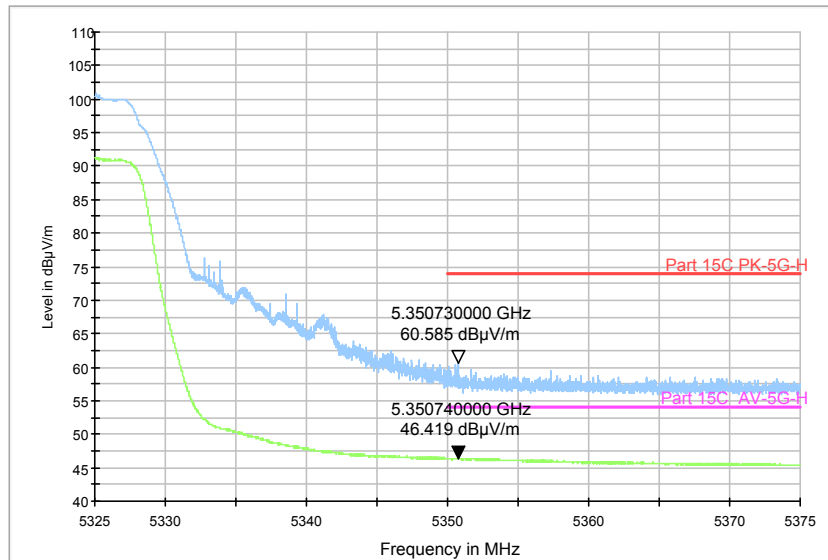


Fig. 6 Band Edges (802.11a, 5320MHz)

RE - Power-5.325GHz-5.375GHz

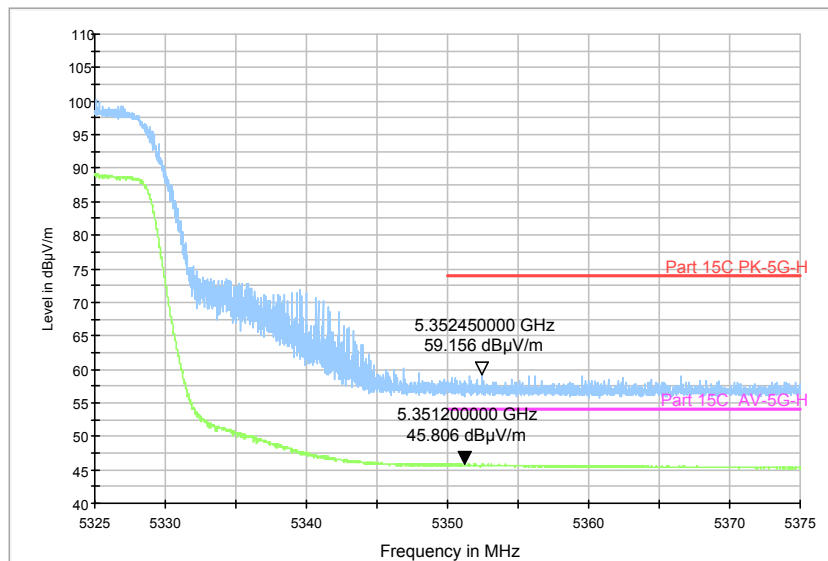


Fig. 7 Band Edges (802.11n-HT20, 5320MHz)

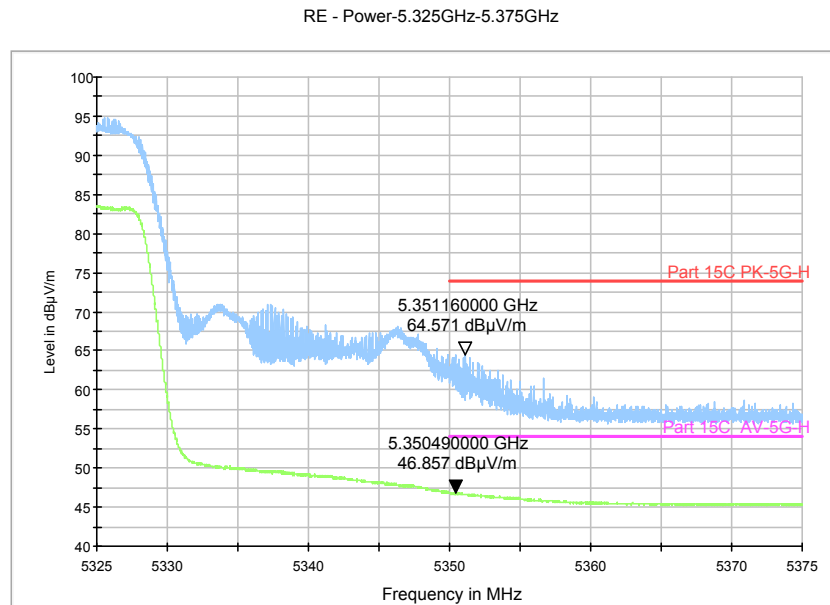


Fig. 8 Band Edges (802.11n-HT40, 5310MHz)

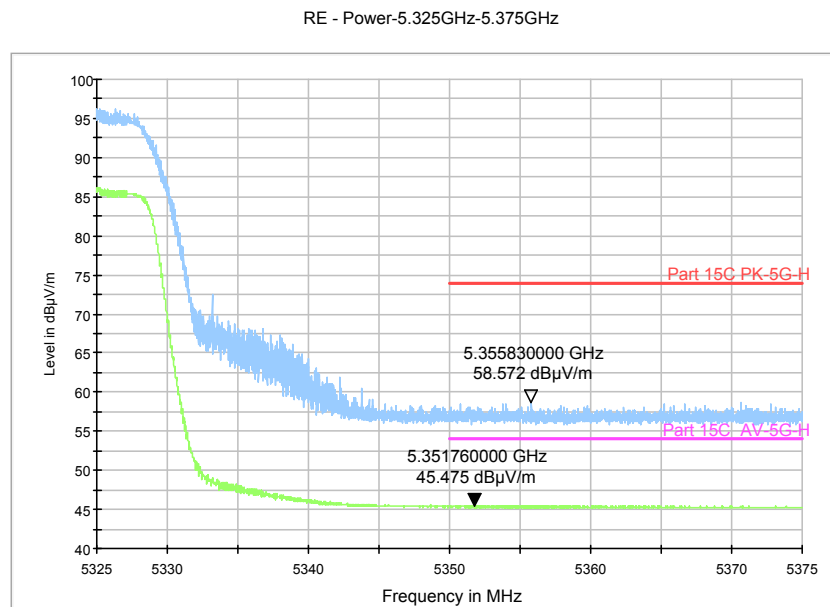


Fig. 9 Band Edges (802.11ac-HT20, 5320MHz)

RE - Power-5.325GHz-5.375GHz

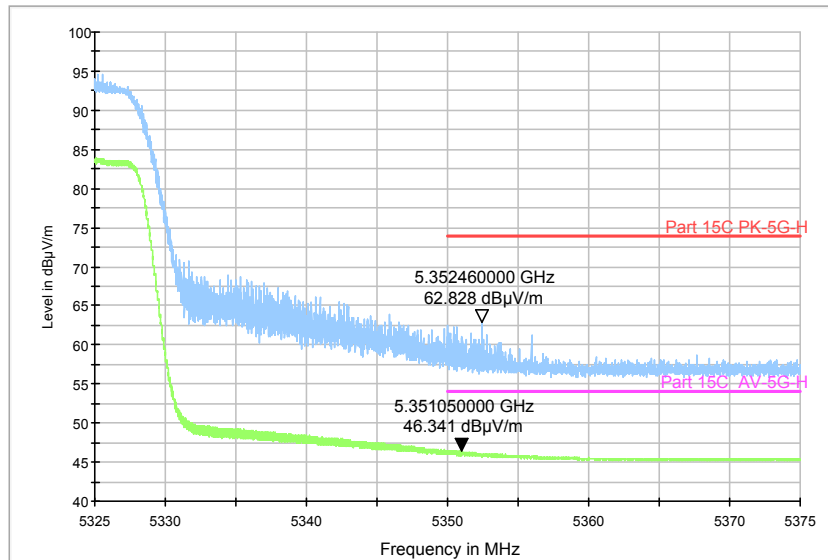


Fig. 10 Band Edges (802.11ac-HT40, 5310MHz)

RE - Power-5.45GHz-5.50GHz

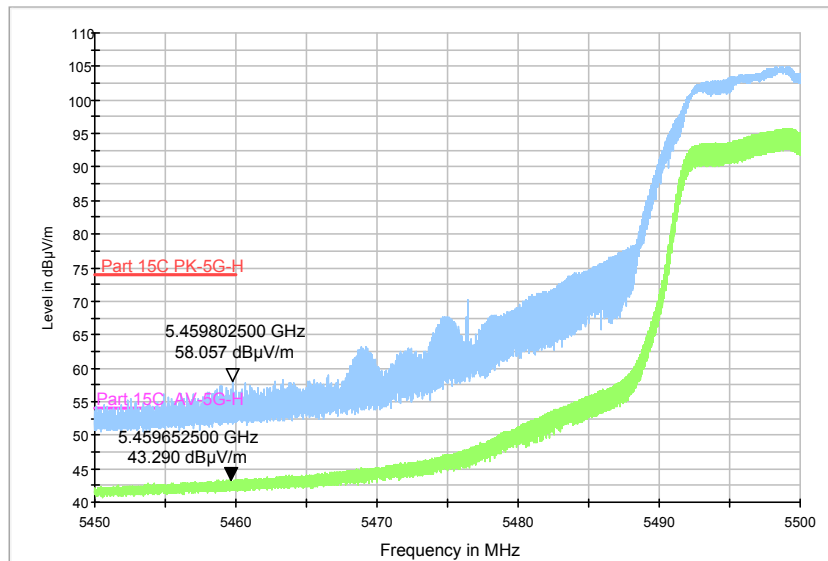


Fig. 11 Band Edges (802.11a, 5500MHz)

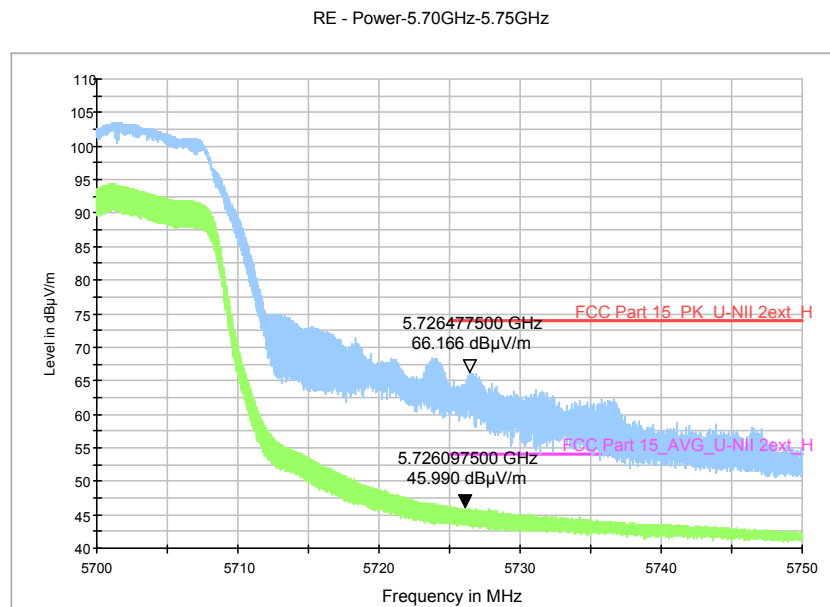


Fig. 12 Band Edges (802.11a, 5700MHz)

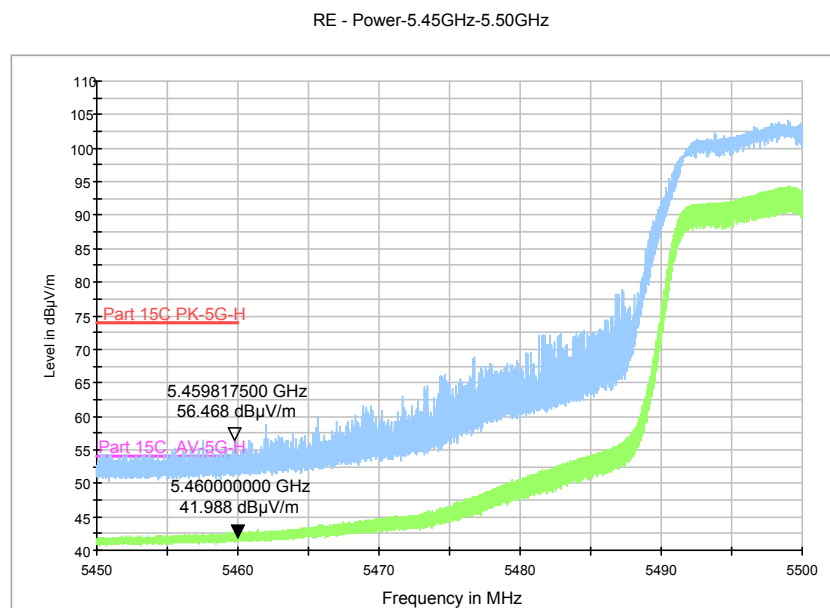


Fig. 13 Band Edges (802.11n-HT20, 5500MHz)

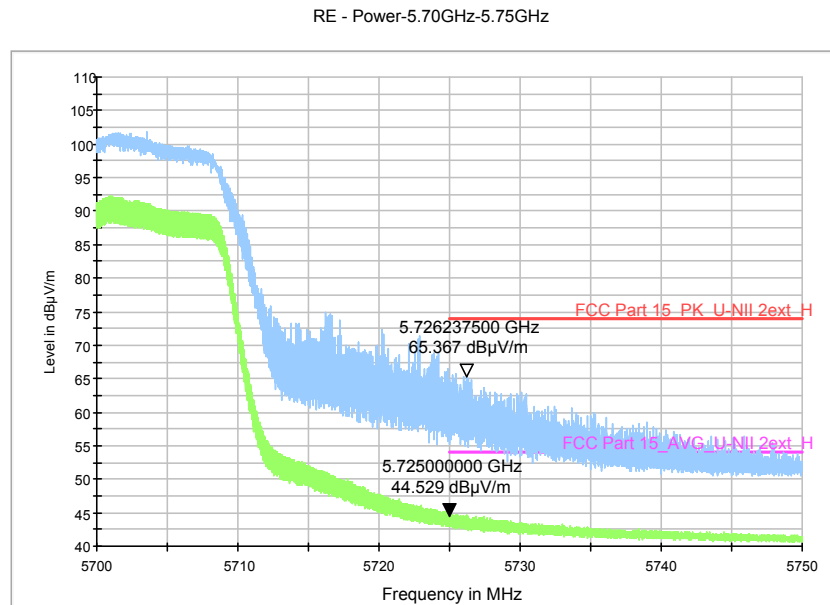


Fig. 14 Band Edges (802.11n-HT20, 5700MHz)

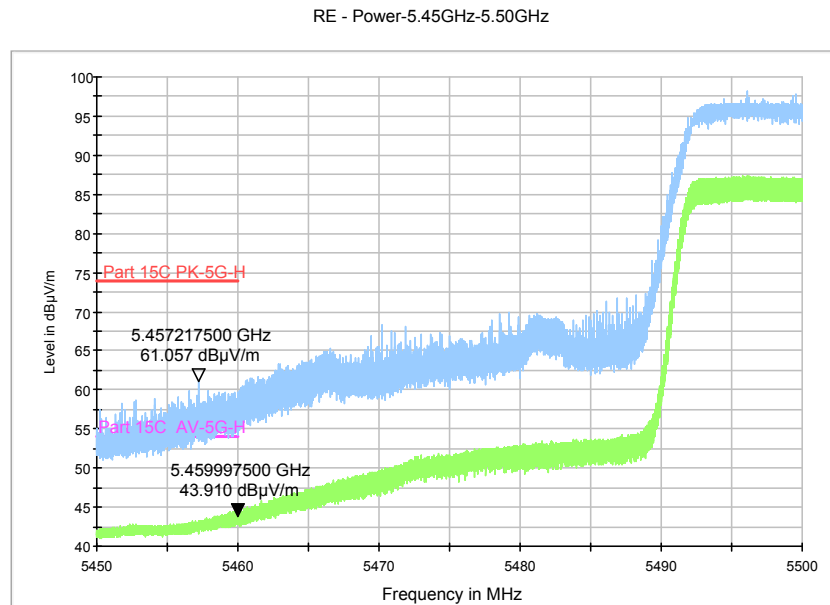


Fig. 15 Band Edges (802.11n-HT40, 5510MHz)

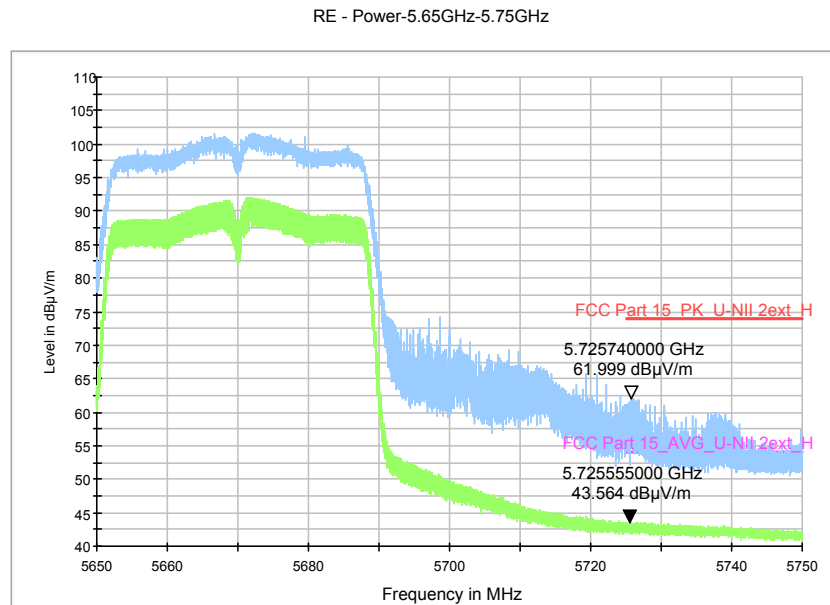


Fig. 16 Band Edges (802.11n-HT40, 5670MHz)

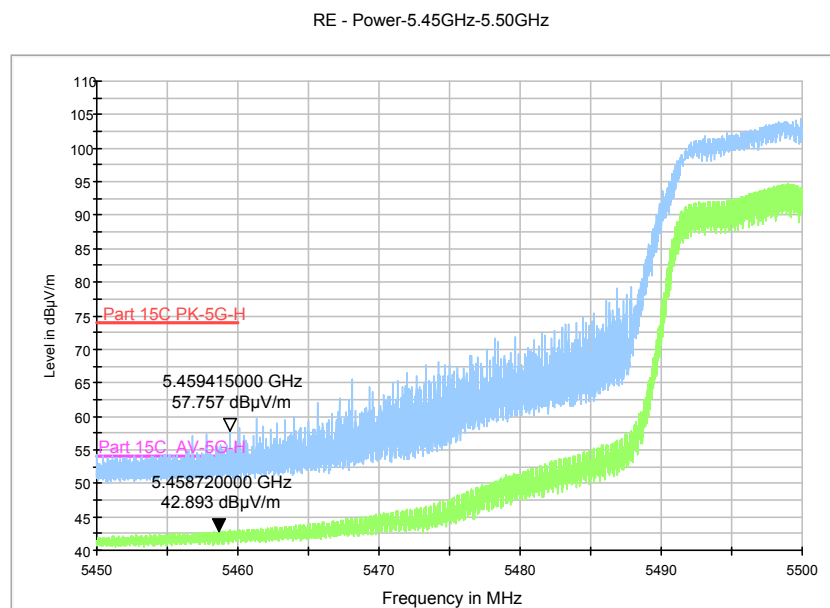


Fig. 17 Band Edges (802.11ac-HT20, 5500MHz)

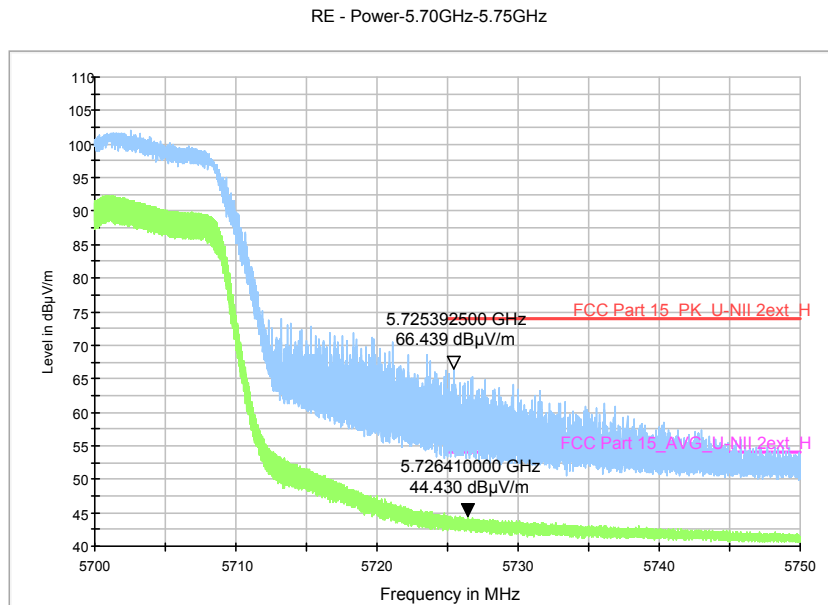


Fig. 18 Band Edges (802.11ac-HT20, 5700MHz)

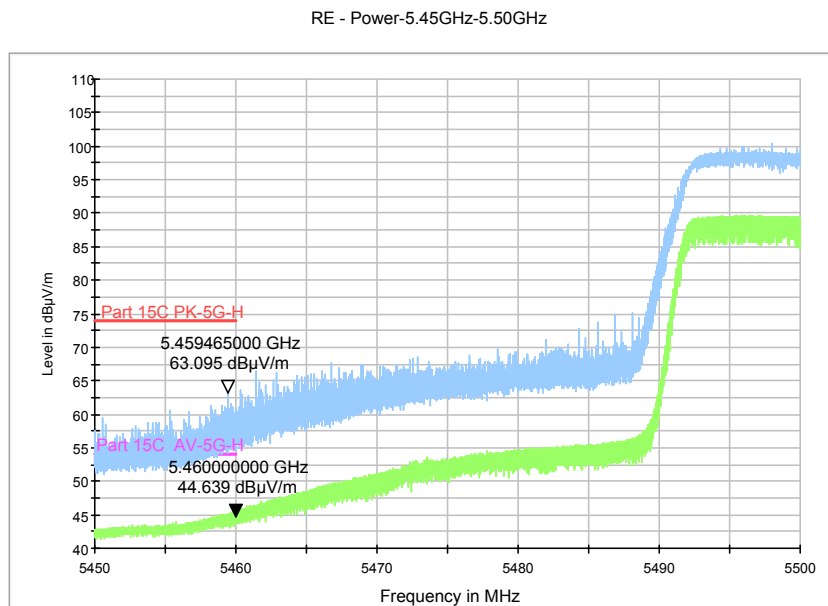


Fig. 19 Band Edges (802.11ac-HT40, 5510MHz)

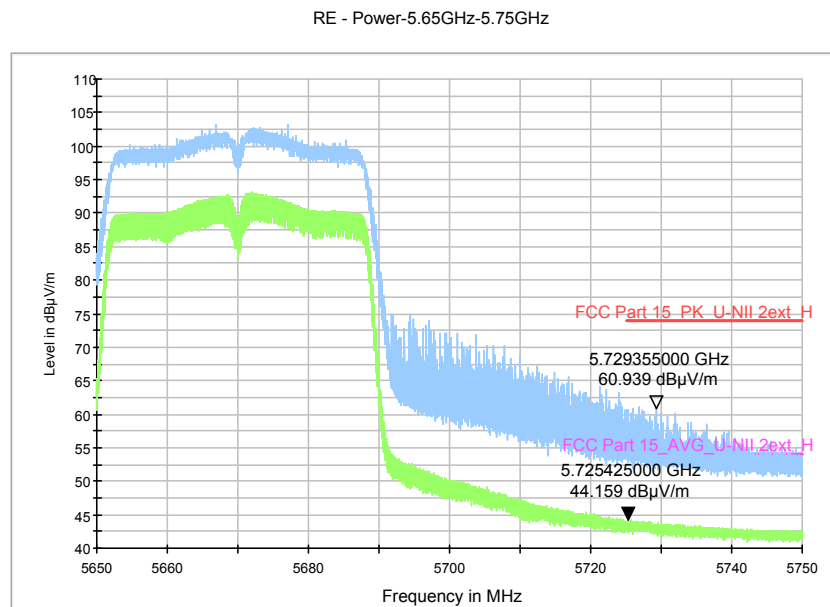


Fig. 20 Band Edges (802.11ac-HT40, 5670MHz)

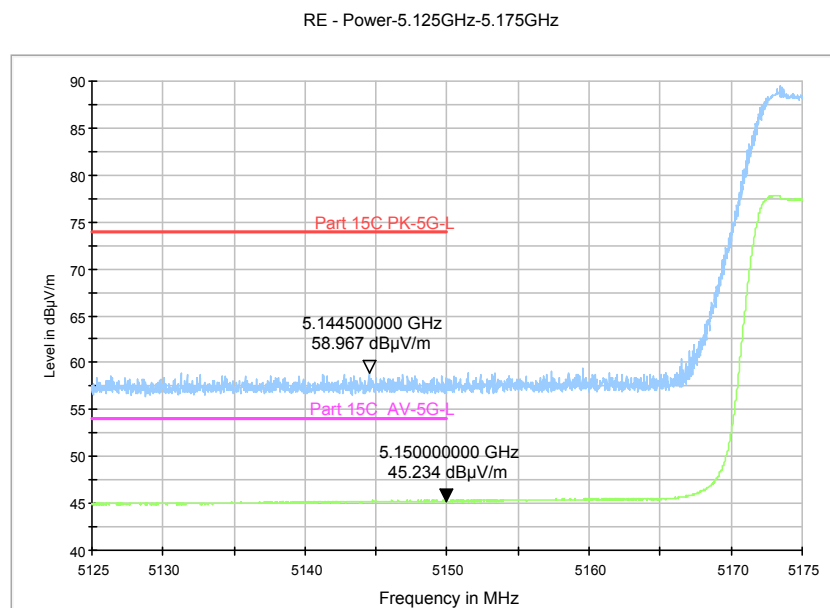


Fig. 21 Band Edges (802.11ac-HT80, 5210MHz)

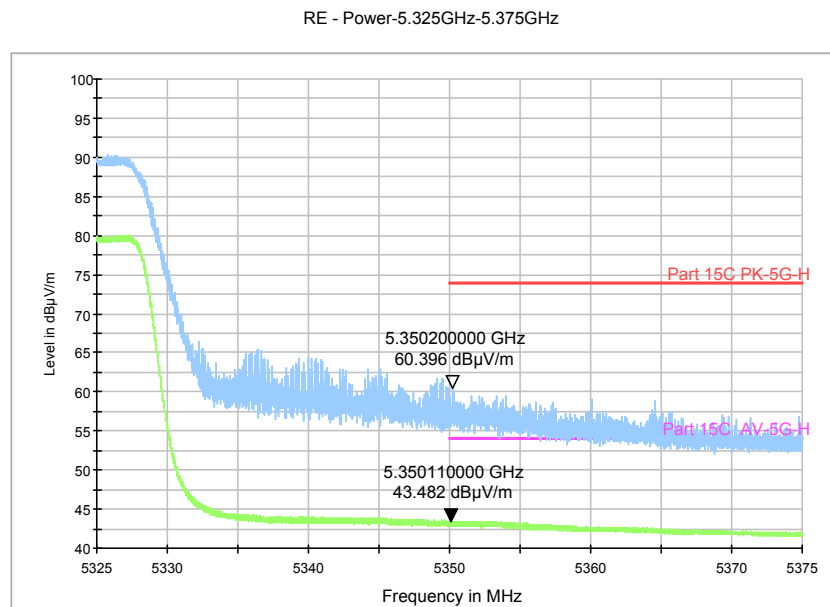


Fig. 22 Band Edges (802.11ac-HT80, 5290MHz)

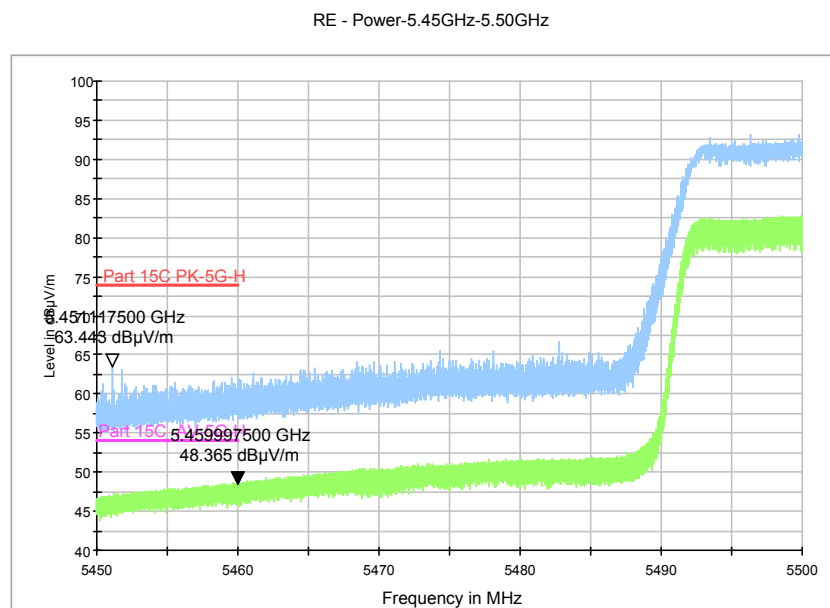


Fig. 23 Band Edges (802.11ac-HT80, 5530MHz)

A.3. Transmitter Spurious Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

The measurement is made according to ANSI C63.10.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBμV/m)	Measurement distance(m)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Measurement uncertainty:

Frequency Range	Uncertainty(dB)	Note
$f \leq 1\text{GHz}$	3.9	k=2
$f > 1\text{GHz}$	4.3	

Measurement Results:

5GHz U-NII 1

802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	36(5180MHz)	1 GHz ~3 GHz	Fig.24	P
		3 GHz ~6 GHz	Fig.25	P
		6 GHz ~ 18 GHz	Fig.26	P
	40(5200MHz)	30 MHz ~1 GHz	Fig.27	P
		1 GHz ~ 3 GHz	Fig.28	P
		3 GHz ~ 6 GHz	Fig.29	P
		6 GHz ~ 18 GHz	Fig.30	P
		18 GHz ~ 26.5 GHz	Fig.31	P
		26.5 GHz ~ 40 GHz	Fig.32	P
	48(5240MHz)	1 GHz ~ 3 GHz	Fig.33	P
		3 GHz ~6 GHz	Fig.34	P
		6 GHz ~ 18 GHz	Fig.35	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n -HT20	36(5180MHz)	1 GHz ~3 GHz	Fig.36	P
		3 GHz ~6 GHz	Fig.37	P
		6 GHz ~ 18 GHz	Fig.38	P
	40(5200MHz)	30 MHz ~1 GHz	Fig.39	P
		1 GHz ~ 3 GHz	Fig.40	P
		3 GHz ~ 6 GHz	Fig.41	P
		6 GHz ~ 18 GHz	Fig.42	P
		18 GHz ~ 26.5 GHz	Fig.43	P
		26.5 GHz ~ 40 GHz	Fig.44	P
	48(5240MHz)	1 GHz ~ 3 GHz	Fig.45	P
		3 GHz ~ 6 GHz	Fig.46	P
		6 GHz ~ 18 GHz	Fig.47	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	36(5190MHz)	30 MHz ~1 GHz	Fig.48	P
		1 GHz ~3 GHz	Fig.49	P
		3 GHz ~6 GHz	Fig.50	P
		6 GHz ~ 18 GHz	Fig.51	P
		18 GHz ~ 26.5 GHz	Fig.52	P
		26.5 GHz ~ 40 GHz	Fig.53	P
	44(5230MHz)	1 GHz ~ 3 GHz	Fig.54	P
		3 GHz ~6 GHz	Fig.55	P
		6 GHz ~ 18 GHz	Fig.56	P

802.11ac-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n -HT20	36(5180MHz)	1 GHz ~3 GHz	Fig.57	P
		3 GHz ~6 GHz	Fig.58	P
		6 GHz ~ 18 GHz	Fig.59	P
	40(5200MHz)	30 MHz ~1 GHz	Fig.60	P
		1 GHz ~ 3 GHz	Fig.61	P
		3 GHz ~ 6 GHz	Fig.62	P
		6 GHz ~ 18 GHz	Fig.63	P
		18 GHz ~ 26.5 GHz	Fig.64	P
		26.5 GHz ~ 40 GHz	Fig.65	P
	48(5240MHz)	1 GHz ~ 3 GHz	Fig.66	P
		3 GHz ~ 6 GHz	Fig.67	P
		6 GHz ~ 18 GHz	Fig.68	P

802.11ac-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	36(5190MHz)	30 MHz ~1 GHz	Fig.69	P
		1 GHz ~3 GHz	Fig.70	P
		3 GHz ~6 GHz	Fig.71	P
		6 GHz ~ 18 GHz	Fig.72	P
		18 GHz ~ 26.5 GHz	Fig.73	P
		26.5 GHz ~ 40 GHz	Fig.74	P
	44(5230MHz)	1 GHz ~ 3 GHz	Fig.75	P
		3 GHz ~6 GHz	Fig.76	P
		6 GHz ~ 18 GHz	Fig.77	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable\ Loss+Antenna\ Factor$

5GHz U-NII 1
802.11a

Channel 36

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
5724.944	45.8	-34.3	34.5	45.566	V
17507.400	43.9	-23.9	41.2	26.553	H
17927.400	43.9	-23.3	41.0	26.233	H
17488.200	43.8	-23.9	41.2	26.453	H
17965.200	43.8	-23.3	41.0	26.133	V
17532.600	43.8	-23.9	41.2	26.453	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
5724.944	62.1	-34.3	34.5	61.866	V
17952.000	56.4	-23.3	41.0	38.733	H
17940.000	56.2	-23.3	41.0	38.533	V
17510.400	56.1	-23.9	41.2	38.753	H
17063.400	56.1	-24.6	41.4	39.315	V
17102.400	56.0	-24.6	41.4	39.215	H

Channel 40

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17488.800	43.9	-23.9	41.2	26.553	H
17649.600	43.9	-23.4	41.2	26.072	H
17990.400	43.9	-23.0	41.0	25.947	H
17977.200	43.9	-23.3	41.0	26.233	V
17976.600	43.9	-23.3	41.0	26.233	H
17986.200	43.9	-23.3	41.0	26.233	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
18000.000	54.6	-23.1	40.8	36.934	V
17999.400	53.5	-23.0	41.0	35.547	H
17998.800	53.0	-23.0	41.0	35.047	V
17998.200	53.4	-23.0	41.0	35.447	V
17997.600	54.5	-23.0	41.0	36.547	V
17997.000	53.2	-23.0	41.0	35.247	H

Channel 48

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
18000.000	43.5	-23.1	40.8	25.834	H
17999.400	43.6	-23.0	41.0	25.647	V
17998.800	43.2	-23.0	41.0	25.247	V
17998.200	43.3	-23.0	41.0	25.347	V
17997.600	43.3	-23.0	41.0	25.347	V
17997.000	43.5	-23.0	41.0	25.547	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17971.200	56.6	-23.3	41.0	38.933	V
17948.400	56.4	-23.3	41.0	38.733	V
17883.000	56.1	-23.3	41.0	38.433	H
17521.800	55.9	-23.9	41.2	38.553	V
17927.400	55.7	-23.3	41.0	38.033	H
17087.400	55.7	-24.6	41.4	38.915	H

802.11n-HT20

Channel 36

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5148.300	45.5	-34.3	34.5	45.266	H
17979.000	54.9	-23.3	41.0	37.233	H
17507.400	53.1	-23.9	41.2	35.753	V
17992.200	53.6	-23.0	41.0	35.647	H
17959.200	54.5	-23.3	41.0	36.833	H
17940.600	54.3	-23.3	41.0	36.633	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5148.740	62.1	-34.3	34.5	61.866	H
17478.600	56.6	-23.9	41.2	39.253	V
17986.200	56.3	-23.3	41.0	38.633	H
17217.000	56.2	-24.2	41.4	38.985	H
17494.800	56.1	-23.9	41.2	38.753	H
17921.400	56.0	-23.3	41.0	38.333	H

Channel 40

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17982.000	43.9	-23.3	41.0	26.233	H
17474.400	43.9	-23.9	41.2	26.553	H
17478.000	43.9	-23.9	41.2	26.553	H
17511.000	43.9	-23.9	41.2	26.553	H
17547.600	43.9	-23.9	41.2	26.553	H
17987.400	43.9	-23.3	41.0	26.233	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17542.200	56.8	-23.9	41.2	39.453	H
17640.600	56.2	-23.4	41.2	38.372	V
17436.600	56.1	-24.3	41.2	39.169	V
17775.600	55.9	-23.4	41.0	38.272	H
17128.800	55.8	-24.2	41.4	38.585	V
17529.600	55.7	-23.9	41.2	38.353	H

Channel 48

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17488.200	44.1	-23.9	41.2	26.753	V
17988.000	44.0	-23.0	41.0	26.047	H
17492.400	43.9	-23.9	41.2	26.553	V
17509.800	43.9	-23.9	41.2	26.553	V
17532.600	43.9	-23.9	41.2	26.553	V
17927.400	43.9	-23.3	41.0	26.233	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17955.000	56.6	-23.3	41.0	38.933	V
17503.800	56.3	-23.9	41.2	38.953	V
17639.400	56.2	-23.4	41.2	38.372	V
17790.000	56.1	-23.4	41.0	38.472	H
17637.600	56.1	-23.4	41.2	38.272	V
17821.800	55.8	-23.3	41.0	38.133	H

802.11n-HT40

Channel 36

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5148.700	45.3	-34.3	34.5	45.066	V
17973.000	44.0	-23.3	41.0	26.333	H
17972.400	44.0	-23.3	41.0	26.333	V
17922.600	44.0	-23.3	41.0	26.333	H
17985.600	44.0	-23.3	41.0	26.333	V
17975.400	43.9	-23.3	41.0	26.233	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5149.360	61.2	-34.3	34.5	60.966	V
18000.000	53.2	-23.1	40.8	35.534	V
17999.400	53.1	-23.0	41.0	35.147	V
17998.800	52.7	-23.0	41.0	34.747	V
17998.200	54.2	-23.0	41.0	36.247	V
17997.600	54.0	-23.0	41.0	36.047	V

Channel 44

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17497.800	44.0	-23.9	41.2	26.653	V
17971.800	44.0	-23.3	41.0	26.333	H
17900.400	43.9	-23.3	41.0	26.233	V
17953.800	43.9	-23.3	41.0	26.233	V
17969.400	43.8	-23.3	41.0	26.133	H
17976.600	43.8	-23.3	41.0	26.133	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
18000.000	54.8	-23.1	40.8	37.134	H
17999.400	54.2	-23.0	41.0	36.247	H
17998.800	53.0	-23.0	41.0	35.047	V
17998.200	54.3	-23.0	41.0	36.347	V
17997.600	54.2	-23.0	41.0	36.247	V
17997.000	54.1	-23.0	41.0	36.147	H

802.11ac-HT20

Channel 36

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5149.180	45.3	-34.3	34.5	45.066	H
17531.400	44.1	-23.9	41.2	26.753	V
17959.800	44.1	-23.3	41.0	26.433	H
17957.400	43.9	-23.3	41.0	26.233	V
17556.600	43.9	-23.9	41.2	26.553	H
17497.800	43.9	-23.9	41.2	26.553	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5146.88	60	-34.2665	34.5	59.766	H
17999.4	56.2	-23.0473	41	38.247	V
17975.4	56	-23.3329	41	38.333	V
17386.8	55.9	-24.2692	41.2	38.969	H
17788.2	55.9	-23.3716	41	38.272	V
17489.4	55.7	-23.8534	41.2	38.353	H

Channel 40

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17977.800	43.9	-23.3	41.0	26.233	V
17940.000	43.9	-23.3	41.0	26.233	H
17967.600	43.9	-23.3	41.0	26.233	V
17961.000	43.9	-23.3	41.0	26.233	H
17478.600	43.9	-23.9	41.2	26.553	V
17507.400	43.8	-23.9	41.2	26.453	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17514.600	56.8	-23.9	41.2	39.453	V
17570.400	56.2	-23.9	41.2	38.853	V
17302.800	55.9	-24.3	41.2	38.969	H
17211.600	55.9	-24.2	41.4	38.685	H
17574.000	55.8	-23.9	41.2	38.453	V
17472.000	55.8	-23.9	41.2	38.453	H

Channel 48

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17964.600	44.0	-23.3	41.0	26.333	V
17987.400	44.0	-23.3	41.0	26.333	V
17950.800	43.9	-23.3	41.0	26.233	H
17983.800	43.9	-23.3	41.0	26.233	V
17958.000	43.9	-23.3	41.0	26.233	H
17491.800	43.9	-23.9	41.2	26.553	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17678.400	56.1	-23.4	41.2	38.272	V
17689.800	56.0	-23.4	41.2	38.172	H
17497.800	55.9	-23.9	41.2	38.553	H
17372.400	55.8	-24.3	41.2	38.869	V
17021.400	55.8	-24.6	41.4	39.015	V
17865.000	55.7	-23.3	41.0	38.033	V

**802.11ac-HT40**

Channel 36

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5148.120	45.3	-34.3	34.5	45.066	V
17961.600	44.0	-23.3	41.0	26.333	V
17511.600	44.0	-23.9	41.2	26.653	V
17479.800	43.9	-23.9	41.2	26.553	V
17954.400	43.9	-23.3	41.0	26.233	V
17512.800	43.9	-23.9	41.2	26.553	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5149.520	59.2	-34.3	34.5	58.966	V
17935.800	56.7	-23.3	41.0	39.033	V
17523.000	56.2	-23.9	41.2	38.853	H
17707.800	56.2	-23.4	41.2	38.372	V
17976.600	56.1	-23.3	41.0	38.433	V
17871.000	56.0	-23.3	41.0	38.333	H

Channel 44

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17567.400	44.0	-23.9	41.2	26.653	H
17499.600	43.9	-23.9	41.2	26.553	H
17946.600	43.9	-23.3	41.0	26.233	H
17941.800	43.9	-23.3	41.0	26.233	V
17942.400	43.9	-23.3	41.0	26.233	V
17953.800	43.9	-23.3	41.0	26.233	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17547.000	56.6	-23.9	41.2	39.253	H
17552.400	56.2	-23.9	41.2	38.853	H
16758.000	55.9	-24.4	41.5	38.830	H
17709.600	55.7	-23.4	41.2	37.872	H
17693.400	55.7	-23.4	41.2	37.872	H
17964.000	55.7	-23.3	41.0	38.033	H

Test graphs as below:

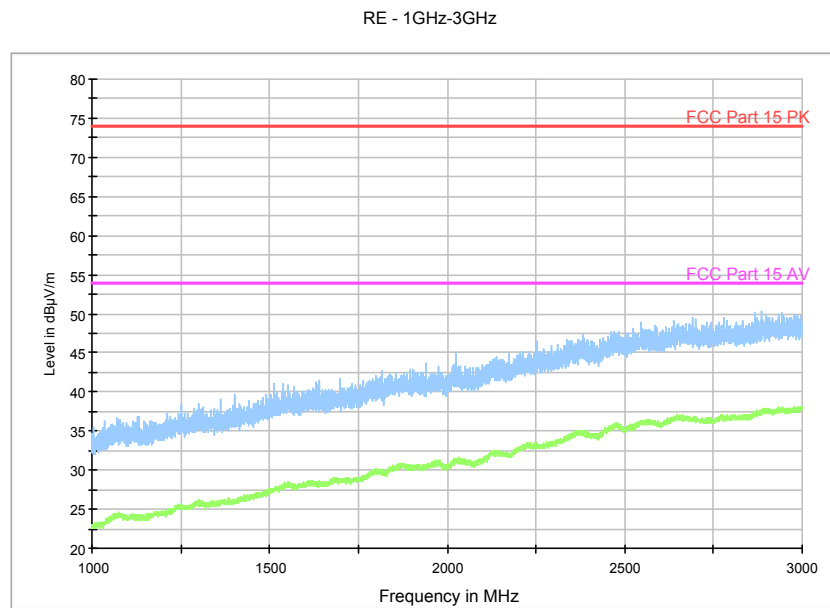


Fig. 24 Radiated Spurious Emission (802.11a, ch36, 1 GHz-3 GHz)

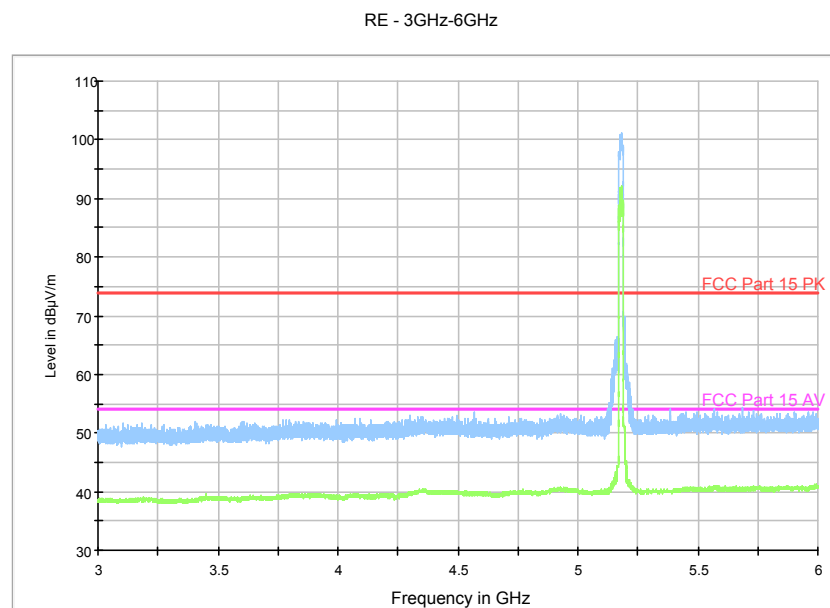


Fig. 25 Radiated Spurious Emission (802.11a, ch36, 3 GHz-6 GHz)

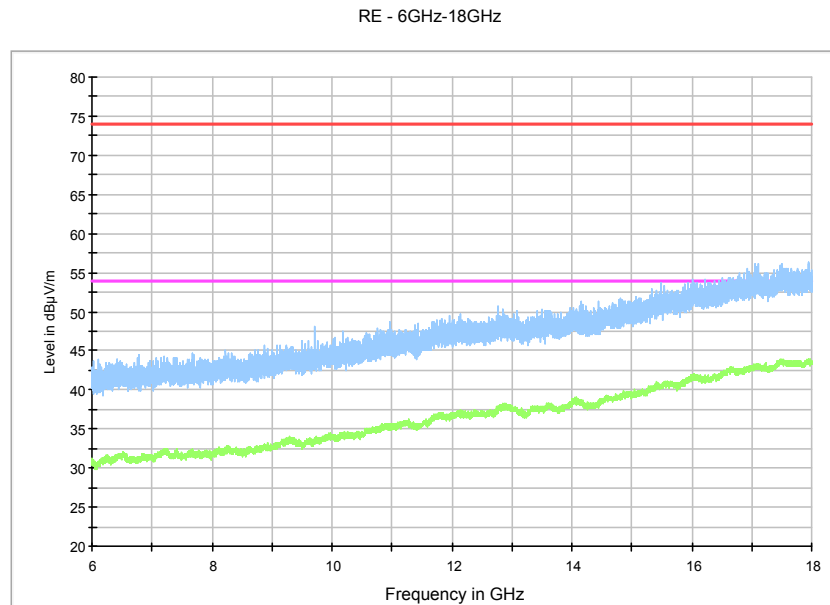


Fig. 26 Radiated Spurious Emission (802.11a, ch36, 6 GHz-18 GHz)

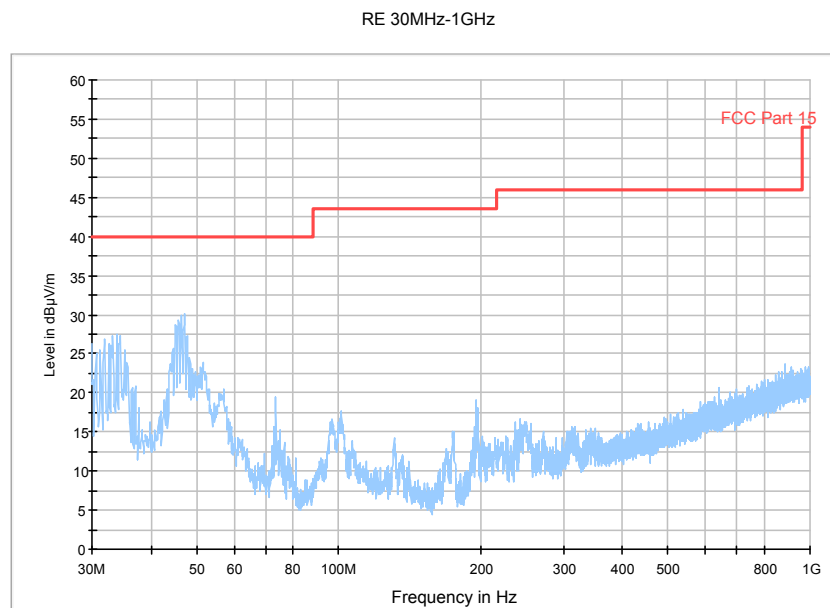


Fig. 27 Radiated Spurious Emission (802.11a, ch40, 30 MHz-1 GHz)


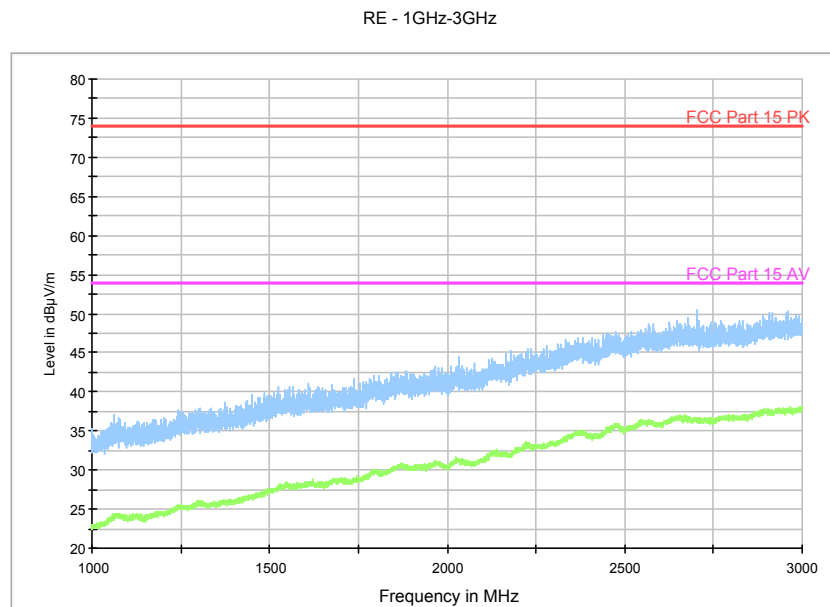


Fig. 28 Radiated Spurious Emission (802.11a, ch40, 1 GHz-3GHz)

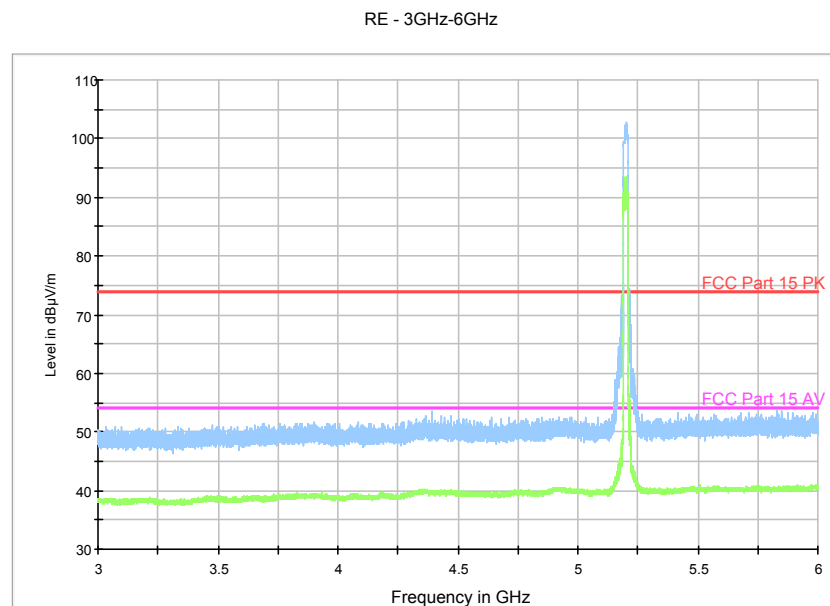

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 29 Radiated Spurious Emission (802.11a, ch40, 3GHz-6GHz)

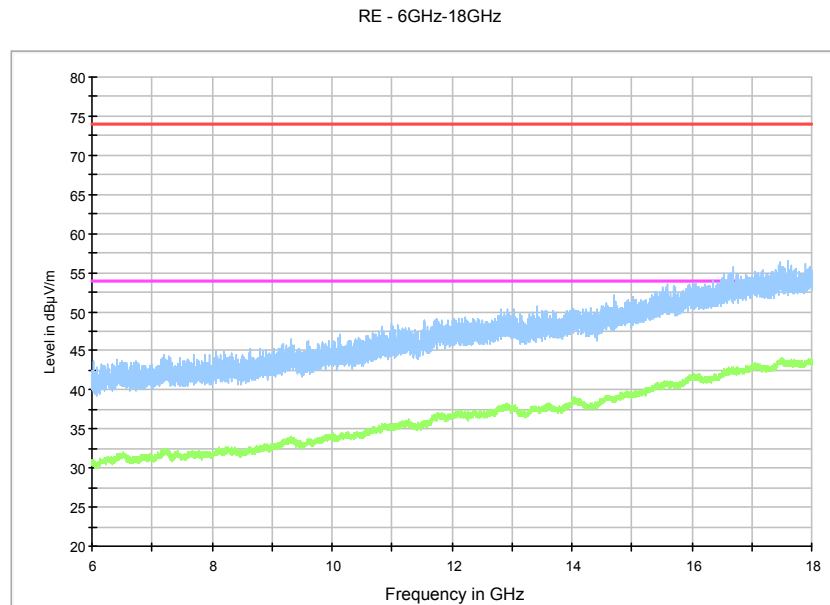


Fig. 30 Radiated Spurious Emission (802.11a, ch40, 6 GHz-18 GHz)

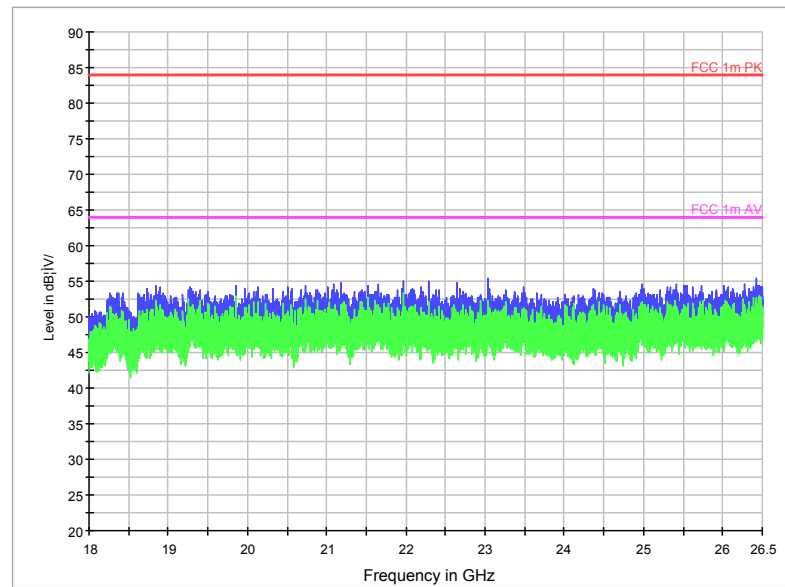


Fig. 31 Radiated Spurious Emission (802.11a, ch40, 18 GHz-26.5 GHz)

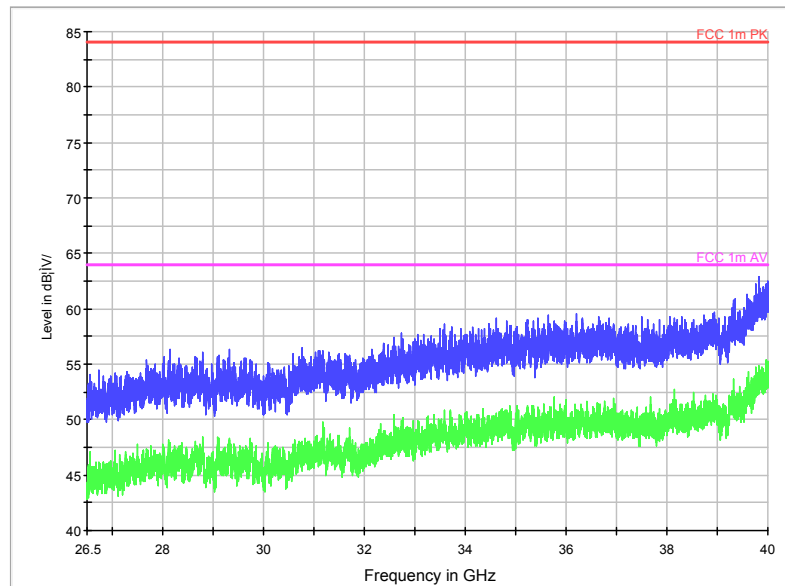


Fig. 32 Radiated Spurious Emission (802.11a, ch40, 26.5 GHz-40 GHz)


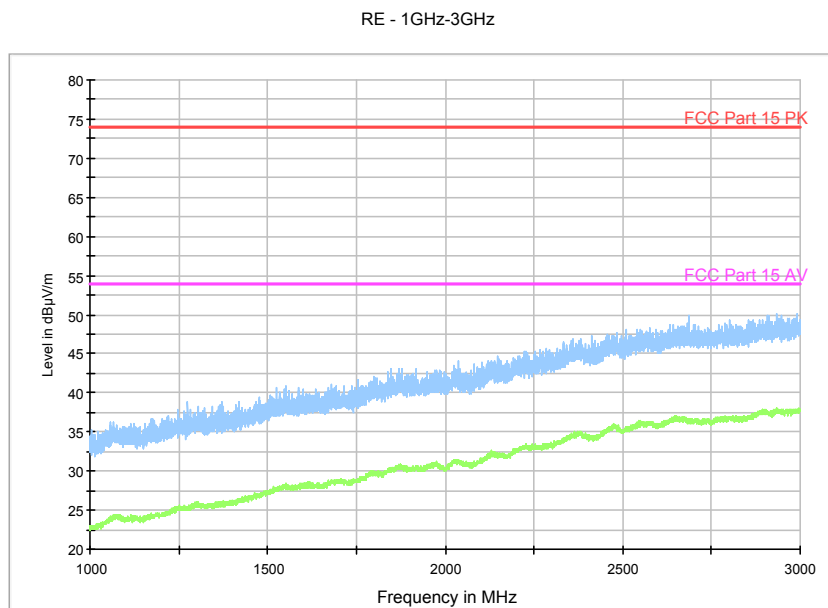


Fig. 33 Radiated Spurious Emission (802.11a, ch48, 1 GHz-3 GHz)

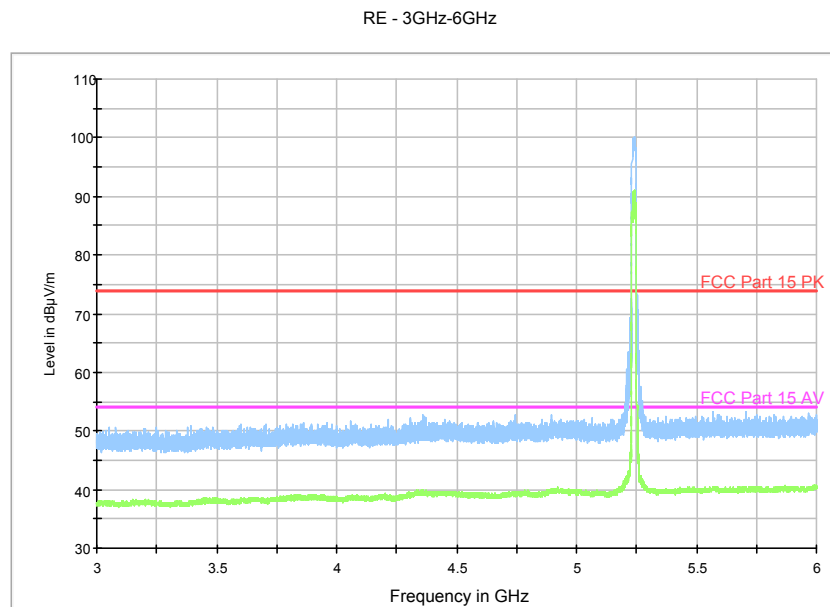

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 34 Radiated Spurious Emission (802.11a, ch48, 3GHz- 6GHz)

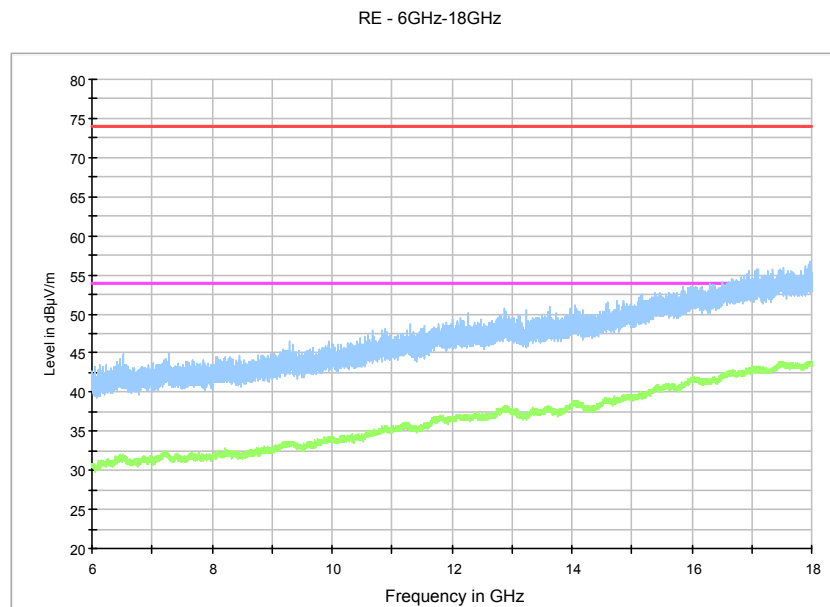


Fig. 35 Radiated Spurious Emission (802.11a, ch48, 6 GHz-18GHz)


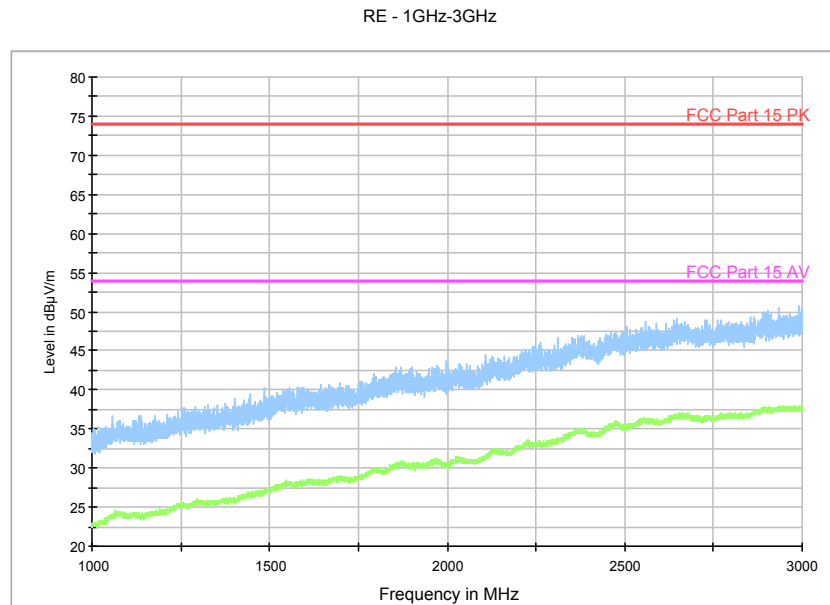


Fig. 36 Radiated Spurious Emission (802.11n-HT20, ch36, 1 GHz-3GHz)

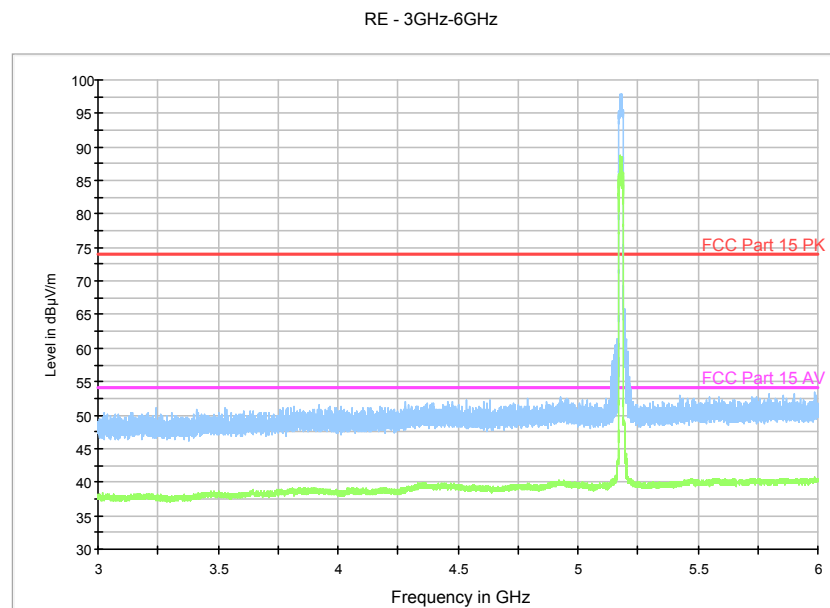

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 37 Radiated Spurious Emission (802.11n-HT20, ch36, 3GHz-6GHz)

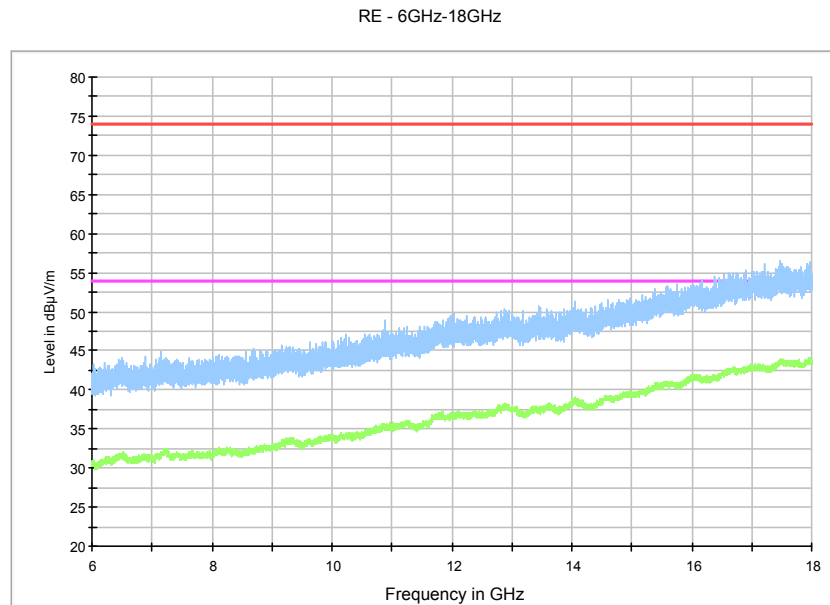


Fig. 38 Radiated Spurious Emission (802.11n-HT20, ch36, 6 GHz-18GHz)

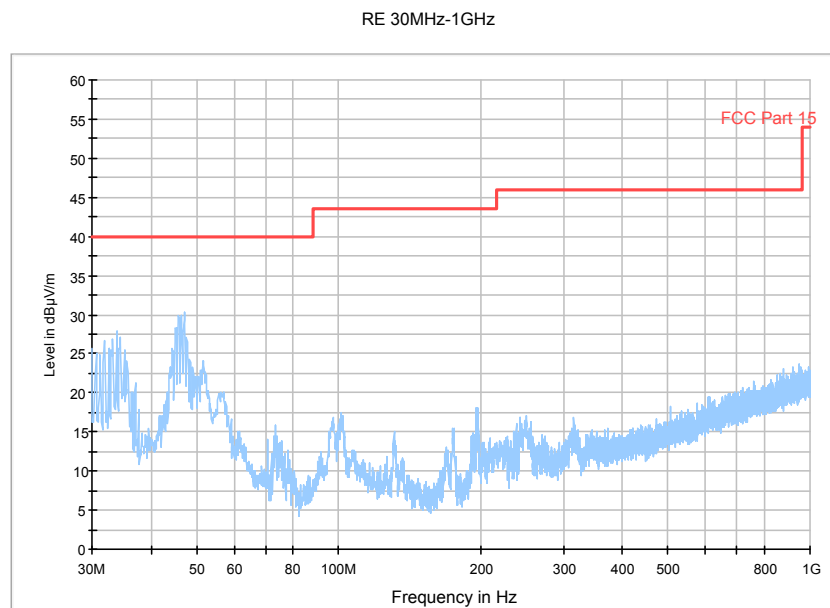


Fig. 39 Radiated Spurious Emission (802.11n-HT20, ch40, 30 MHz-1 GHz)


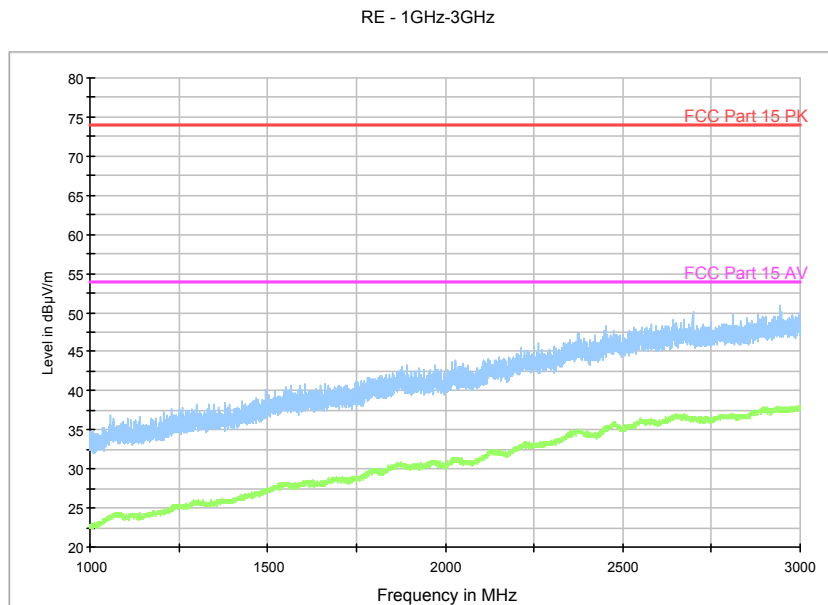


Fig. 40 Radiated Spurious Emission (802.11n-HT20, ch40, 1 GHz-3 GHz)

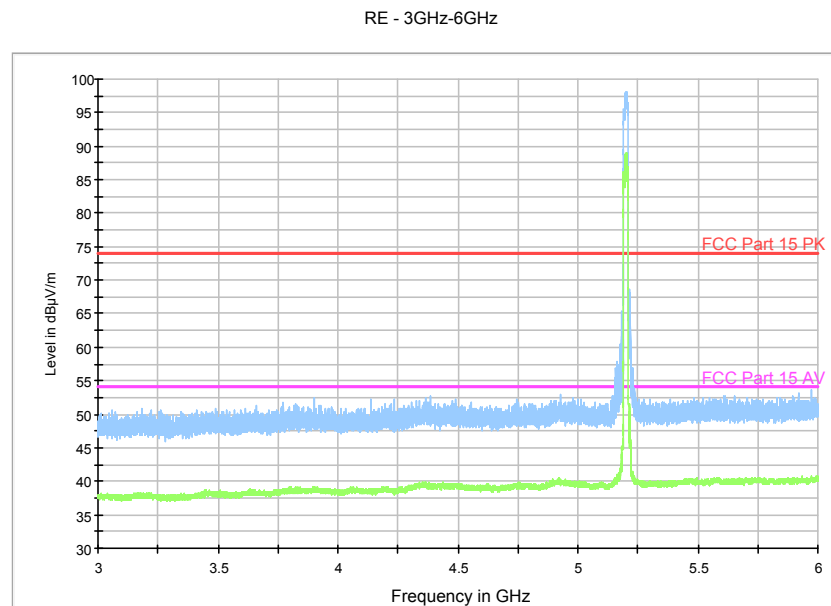

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 41 Radiated Spurious Emission (802.11n-HT20, ch40, 3 GHz-6 GHz)

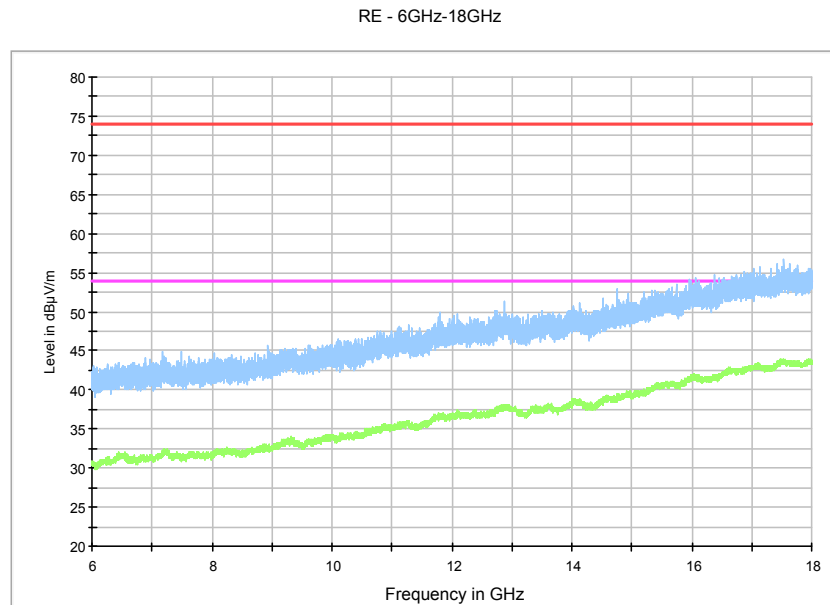


Fig. 42 Radiated Spurious Emission (802.11n-HT20, ch40, 6 GHz-18 GHz)

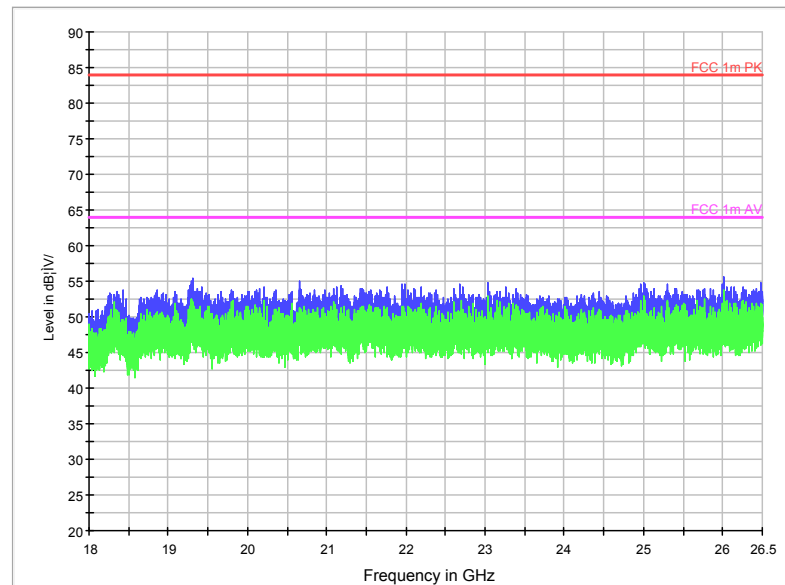


Fig. 43 Radiated Spurious Emission (802.11n-HT20, ch40, 18 GHz-26.5 GHz)

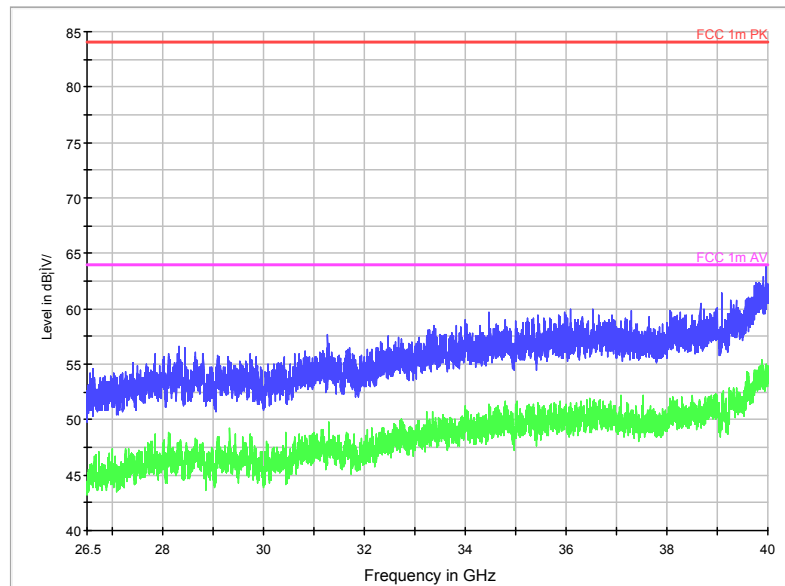


Fig. 44 Radiated Spurious Emission (802.11n-HT20, ch40, 26.5 GHz-40 GHz)


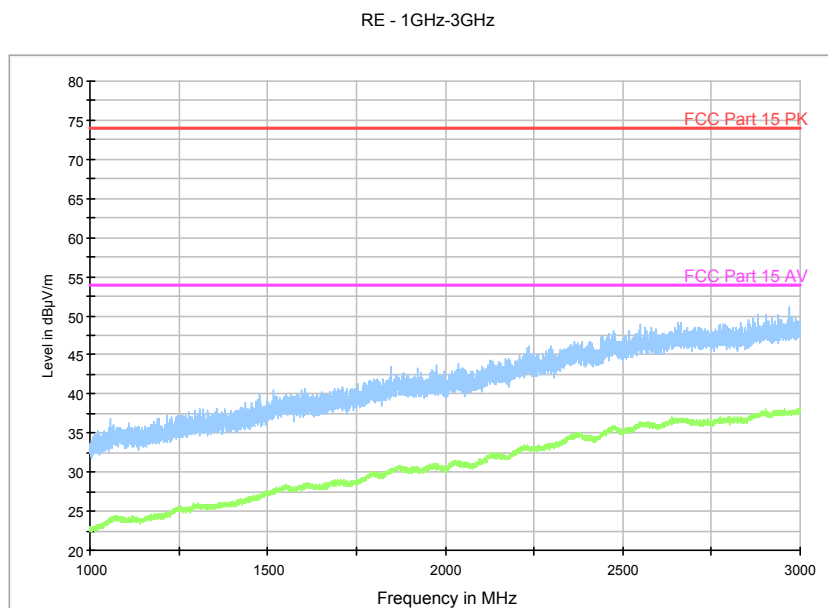


Fig. 45 Radiated Spurious Emission (802.11n-HT20, ch48, 1 GHz-3GHz)

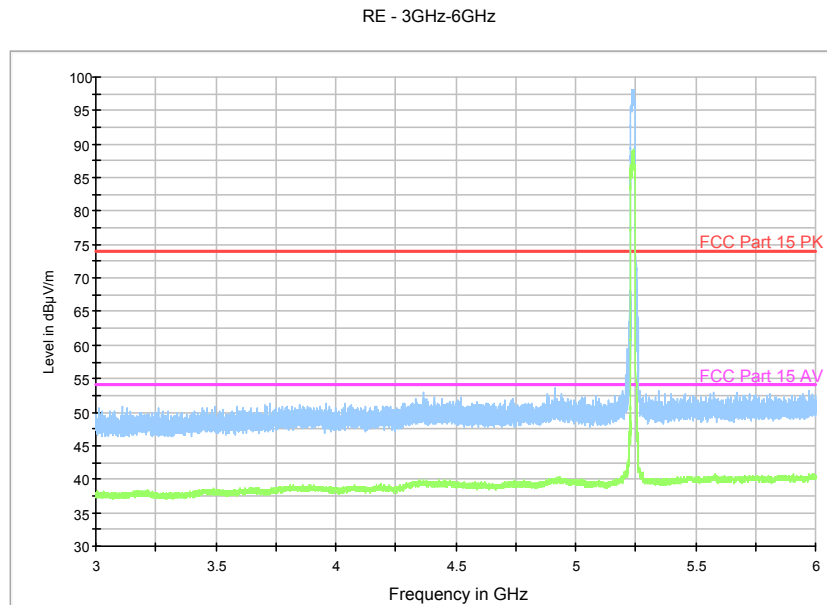

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 46 Radiated Spurious Emission (802.11n-HT20, ch48, 3 GHz-6GHz)

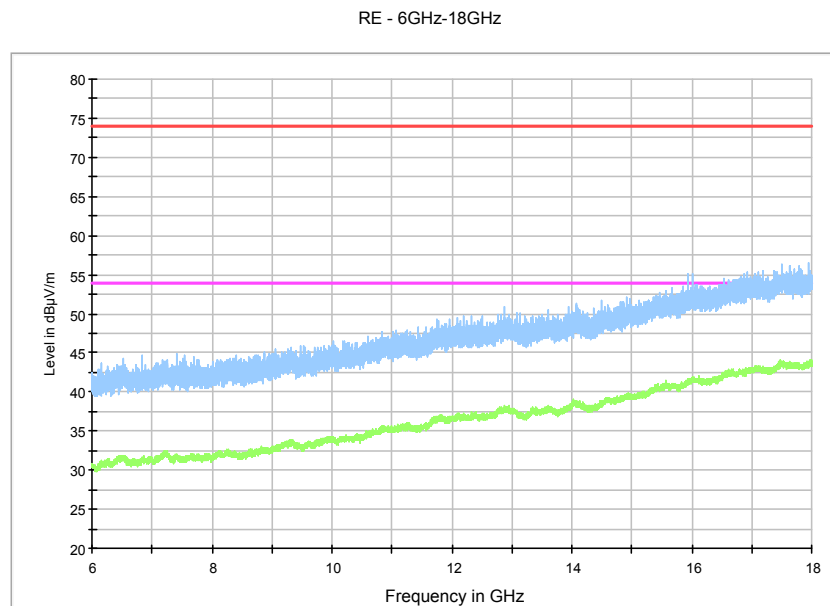


Fig. 47 Radiated Spurious Emission (802.11n-HT20, ch48, 6 GHz-18 GHz)

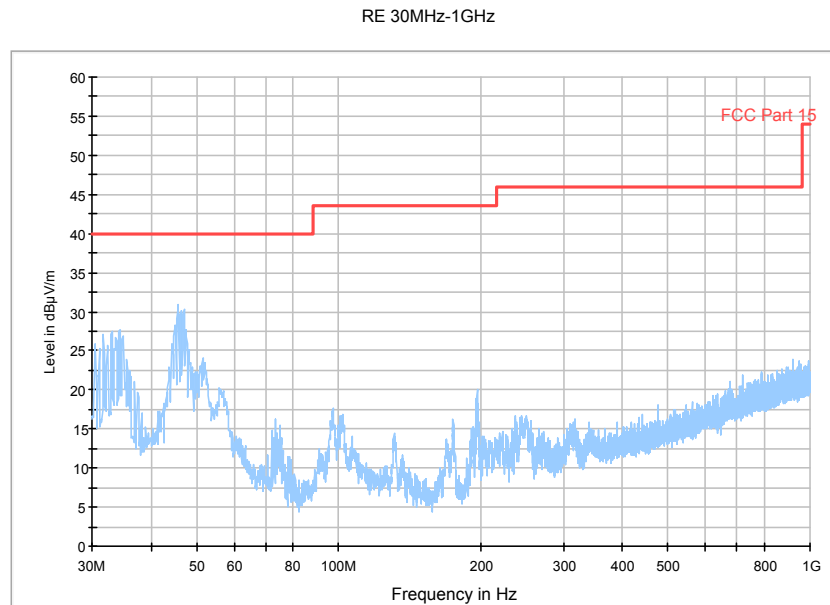


Fig. 48 Radiated Spurious Emission (802.11n-HT40, ch36, 30 MHz-1 GHz)


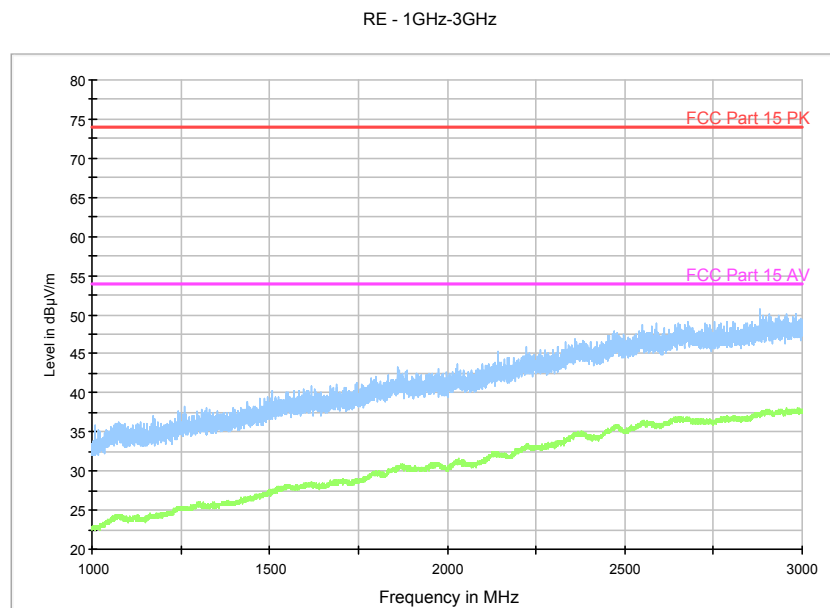


Fig. 49 Radiated Spurious Emission (802.11n-HT40, ch36, 1 GHz-3GHz)

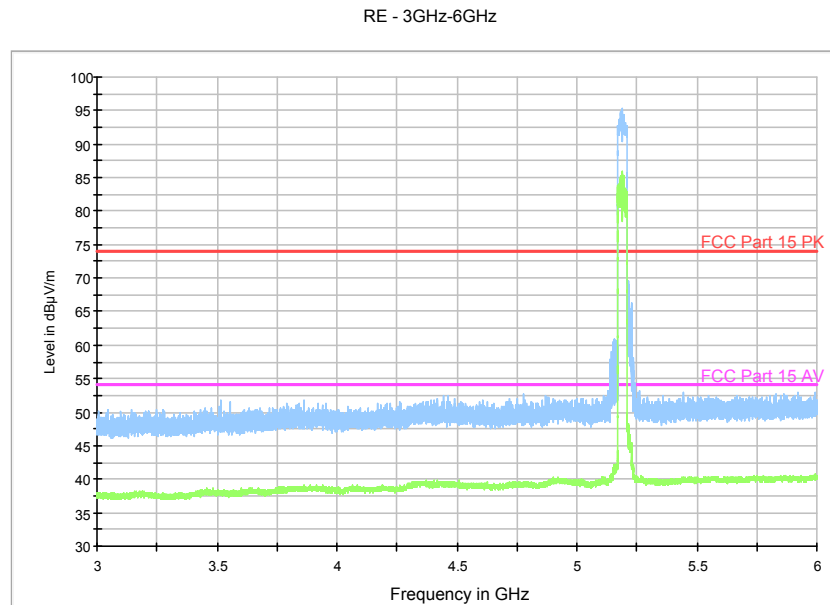

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 50 Radiated Spurious Emission (802.11n-HT40, ch36, 3 GHz-6GHz)

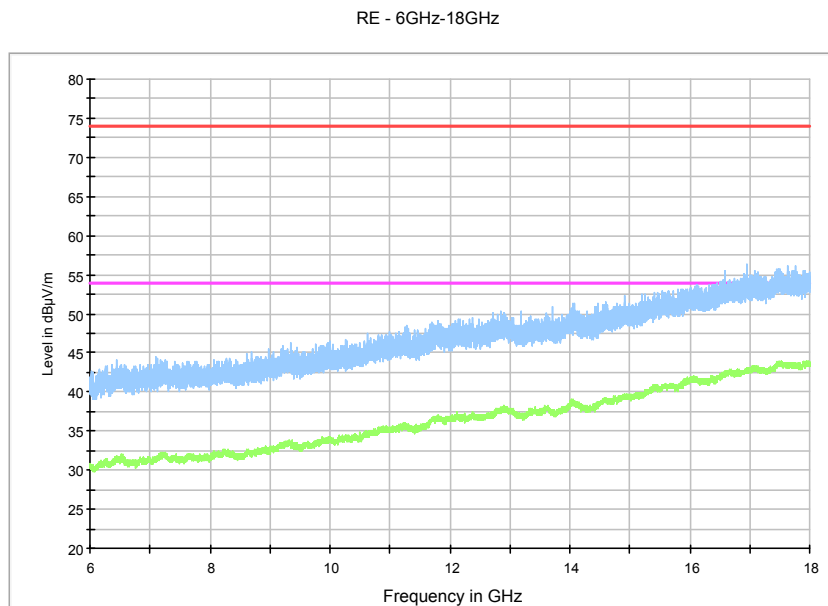


Fig. 51 Radiated Spurious Emission (802.11n-HT40, ch36, 6 GHz-18 GHz)

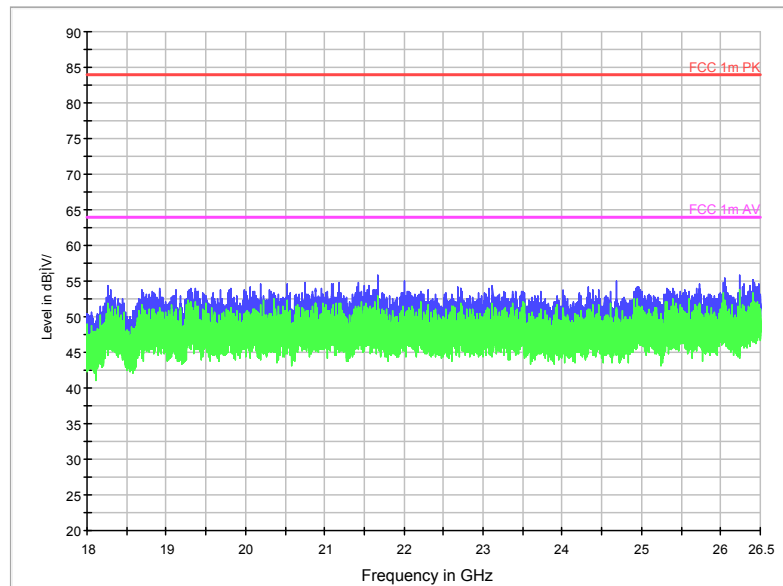


Fig. 52 Radiated Spurious Emission (802.11n-HT40, ch36, 18 GHz-26.5 GHz)

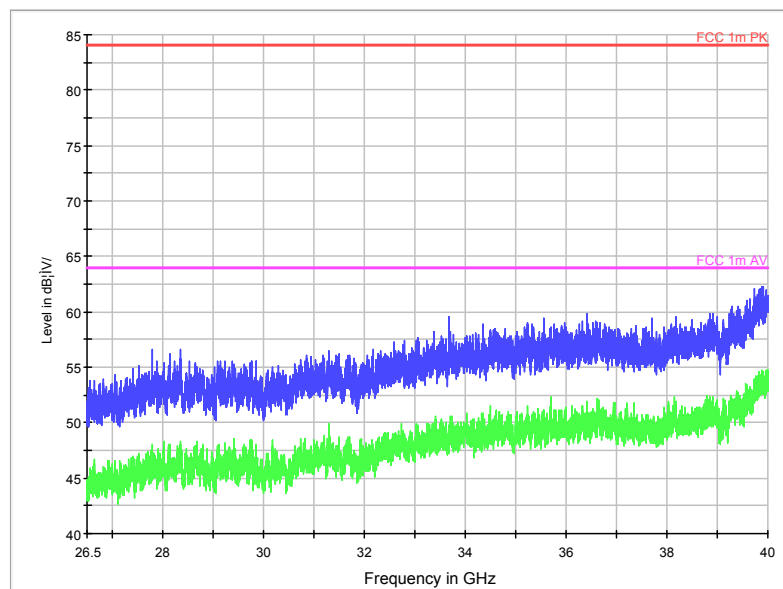


Fig. 53 Radiated Spurious Emission (802.11n-HT40, ch36, 26.5 GHz-40 GHz)


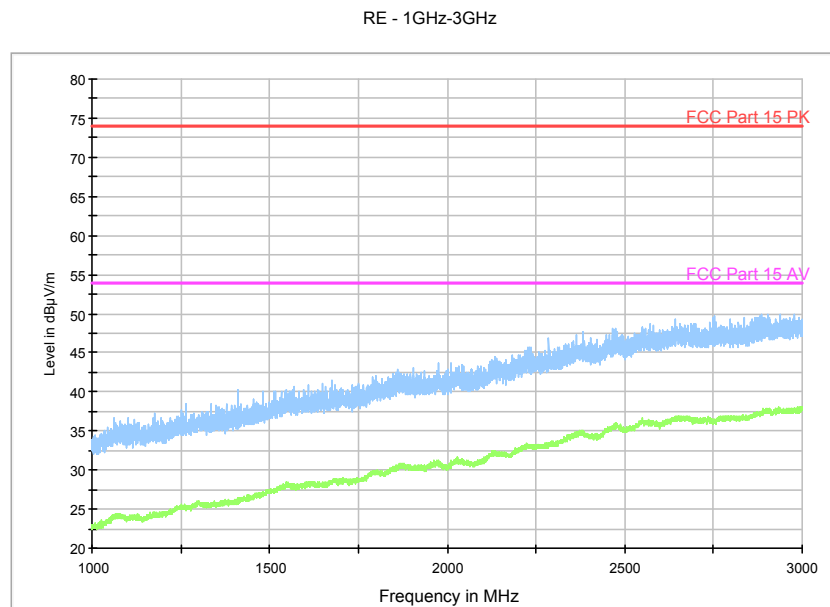


Fig. 54 Radiated Spurious Emission (802.11n-HT40, ch44, 1 GHz-3GHz)

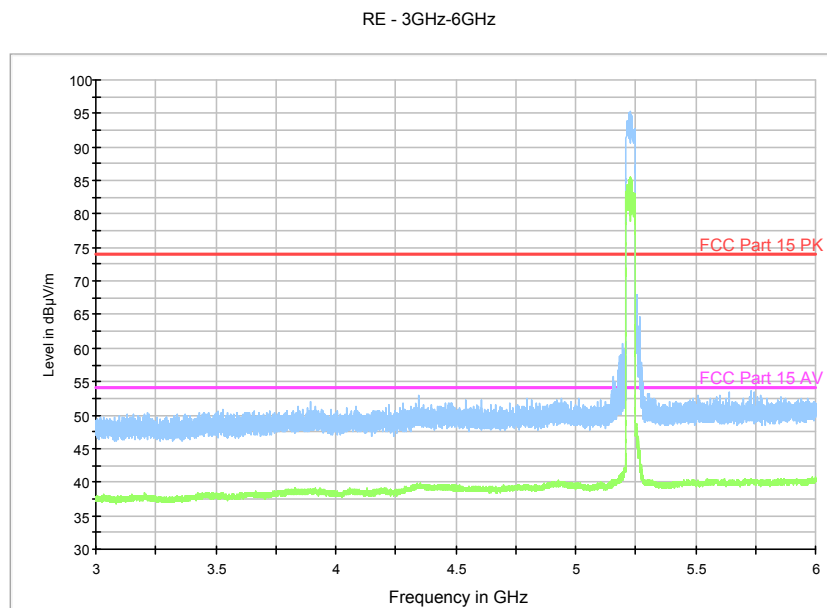

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 55 Radiated Spurious Emission (802.11n-HT40, ch44, 3GHz-6GHz)

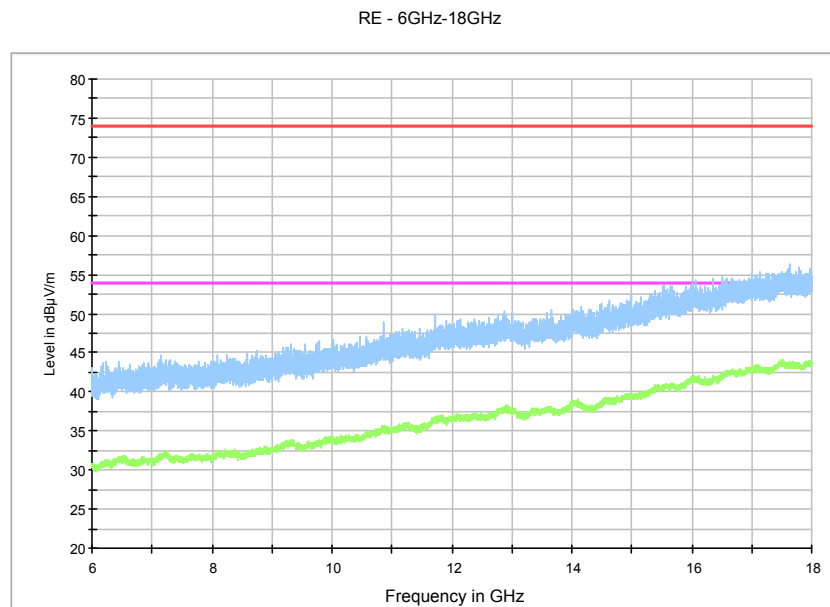


Fig. 56 Radiated Spurious Emission (802.11n-HT40, ch44, 6 GHz-18 GHz)


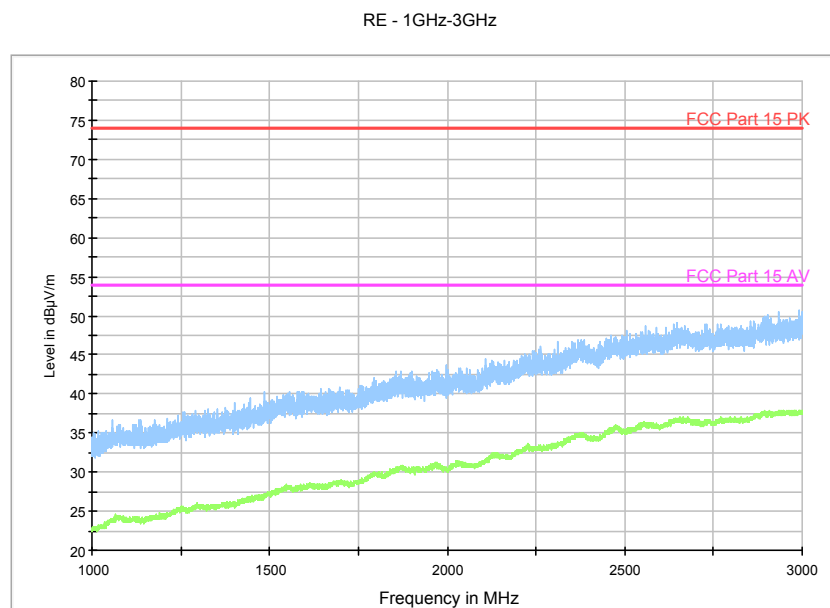


Fig. 57 Radiated Spurious Emission (802.11ac-HT20, ch36, 1 GHz-3 GHz)

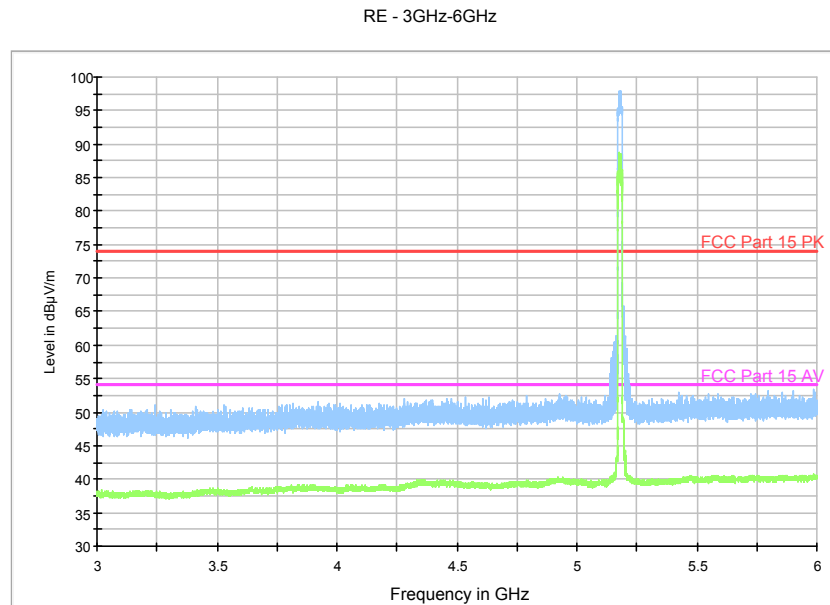

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 58 Radiated Spurious Emission (802.11ac-HT20, ch36, 3 GHz-6 GHz)

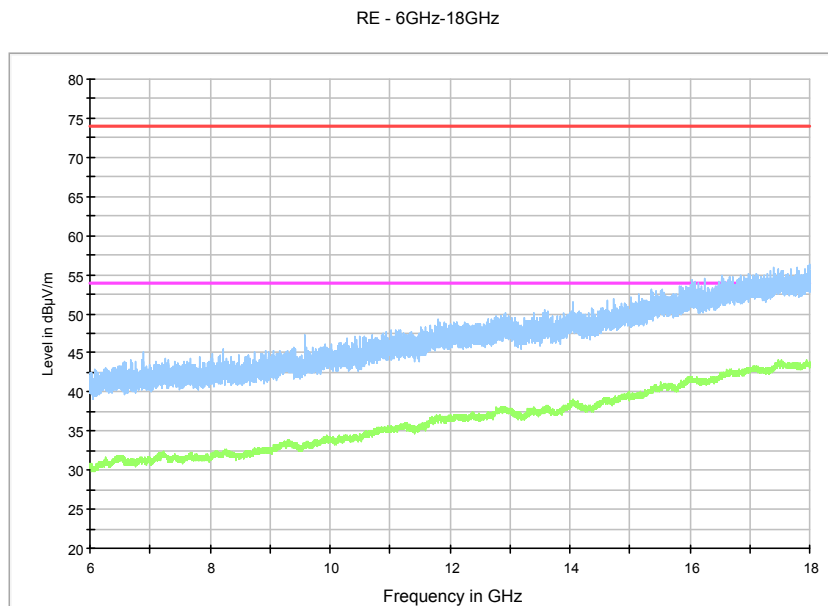


Fig. 59 Radiated Spurious Emission (802.11ac-HT20, ch36, 6 GHz-18GHz)

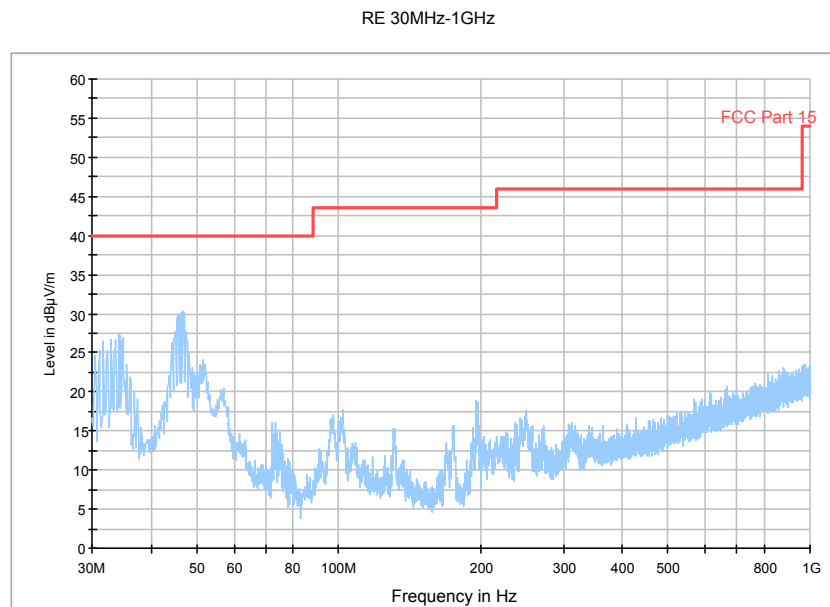


Fig. 60 Radiated Spurious Emission (802.11ac-HT20, ch40, 30 MHz-1 GHz)


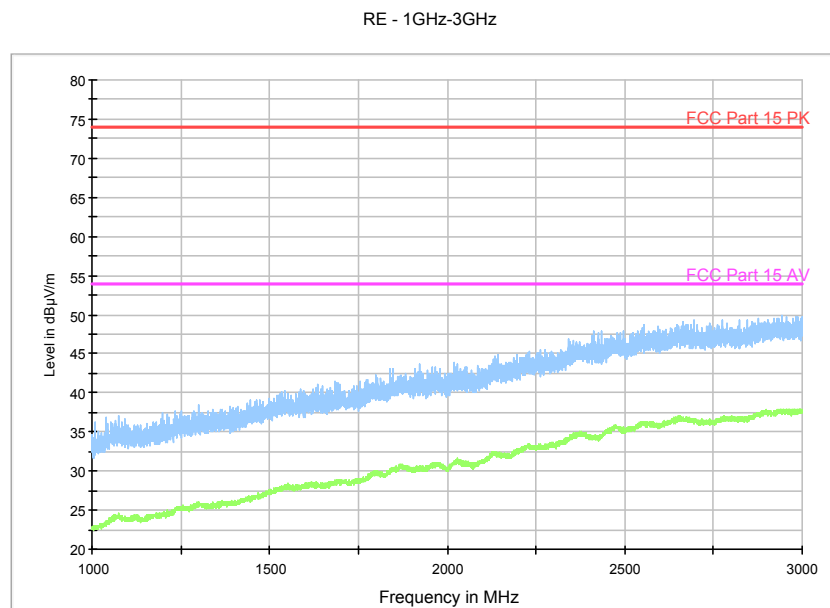


Fig. 61 Radiated Spurious Emission (802.11ac-HT20, ch40, 1 GHz-3 GHz)

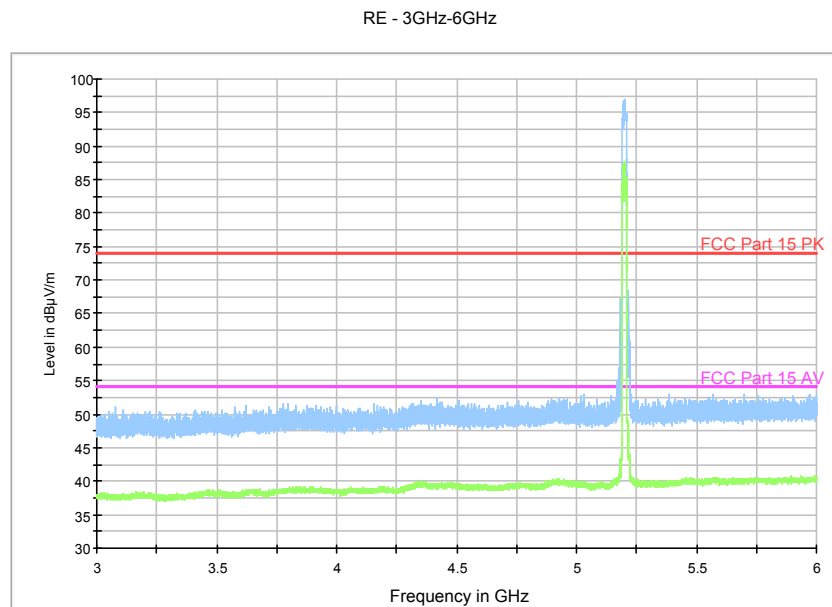

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 62 Radiated Spurious Emission (802.11ac-HT20, ch40, 3 GHz-6 GHz)

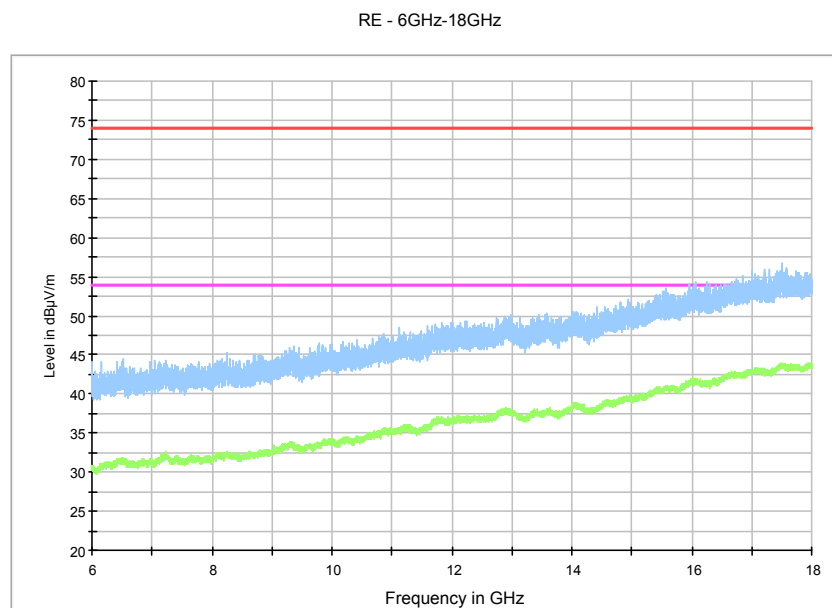


Fig. 63 Radiated Spurious Emission (802.11ac-HT20, ch40, 6 GHz-18 GHz)

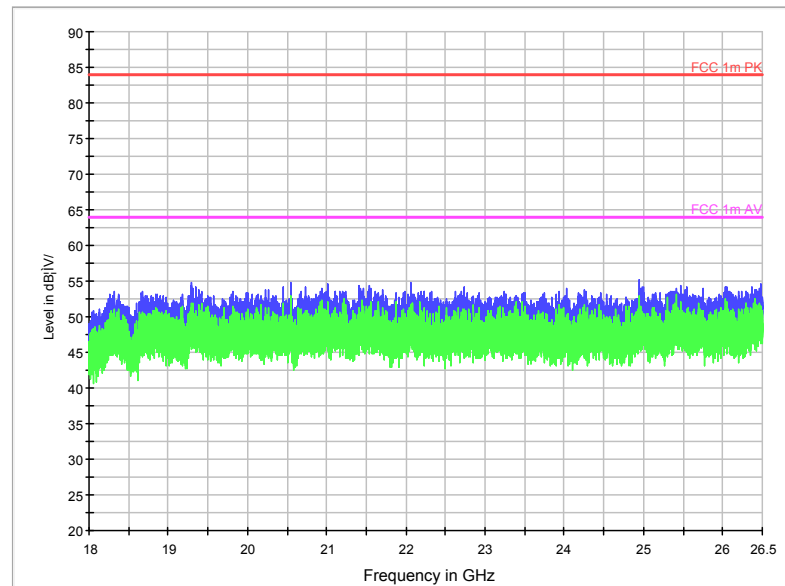


Fig. 64 Radiated Spurious Emission (802.11ac-HT20, ch40, 18 GHz-26.5 GHz)

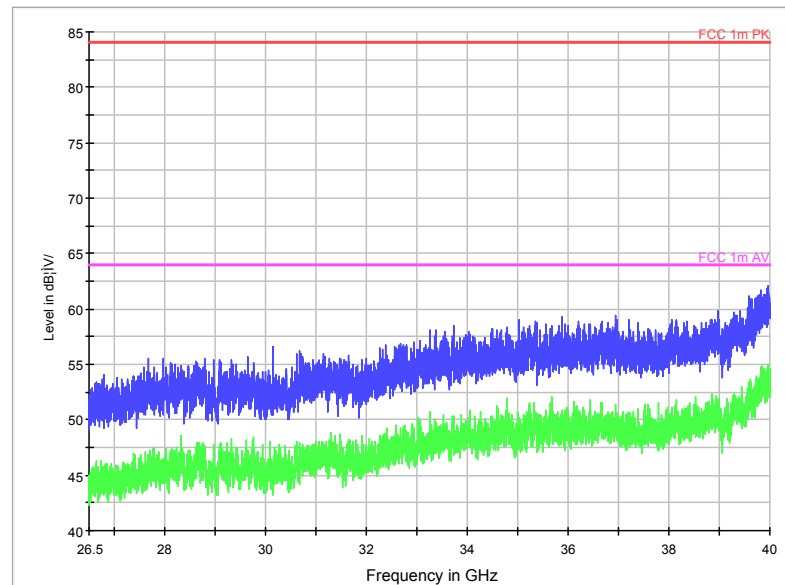


Fig. 65 Radiated Spurious Emission (802.11ac-HT20, ch40, 26.5 GHz-40 GHz)


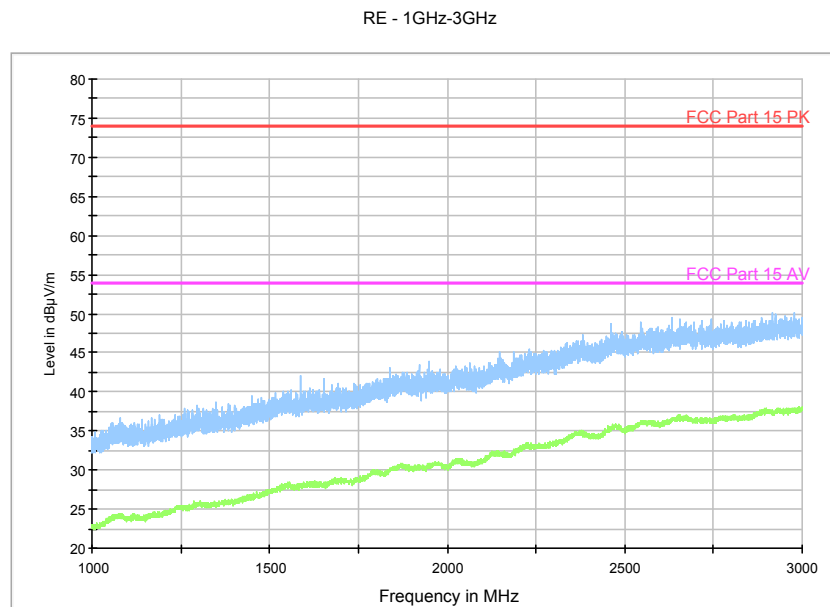


Fig. 66 Radiated Spurious Emission (802.11ac-HT20, ch48, 1 GHz-3GHz)

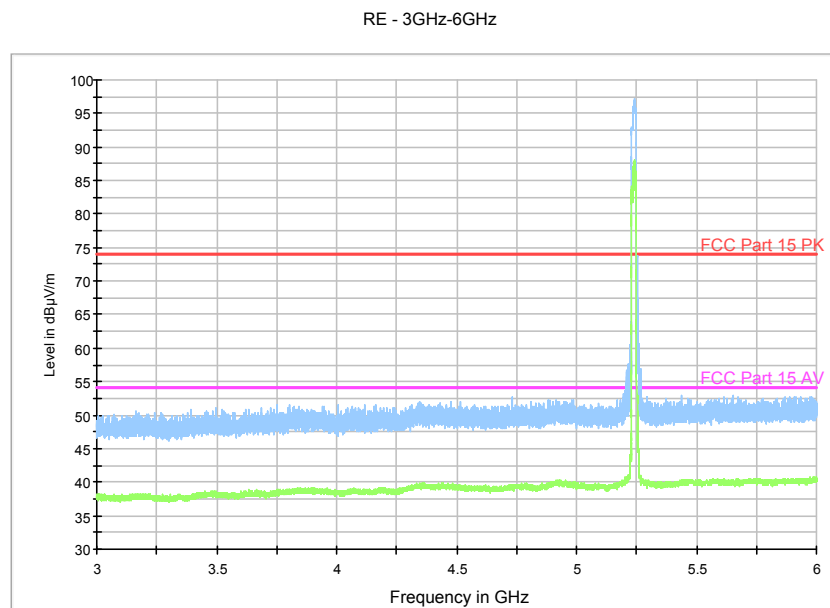

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 67 Radiated Spurious Emission (802.11ac-HT20, ch48, 3 GHz-6GHz)

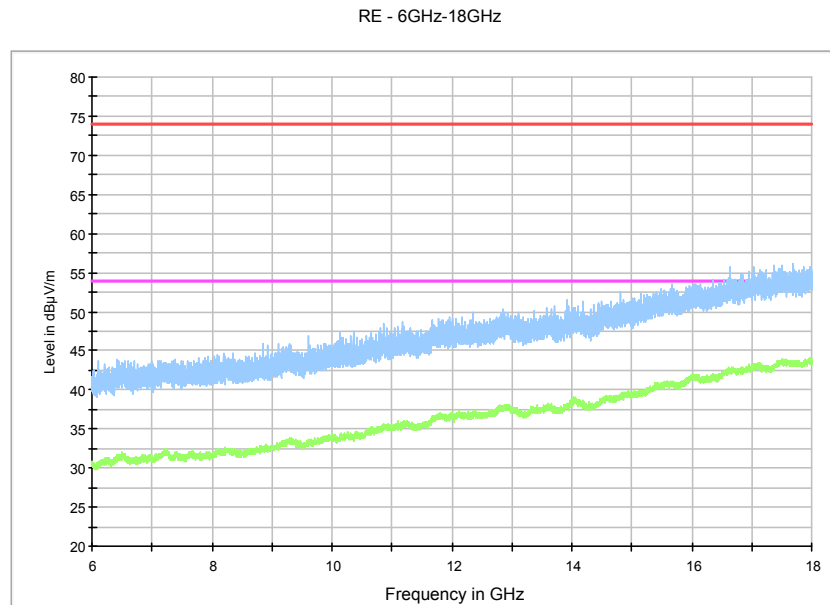


Fig. 68 Radiated Spurious Emission (802.11ac-HT20, ch48, 6 GHz-18 GHz)

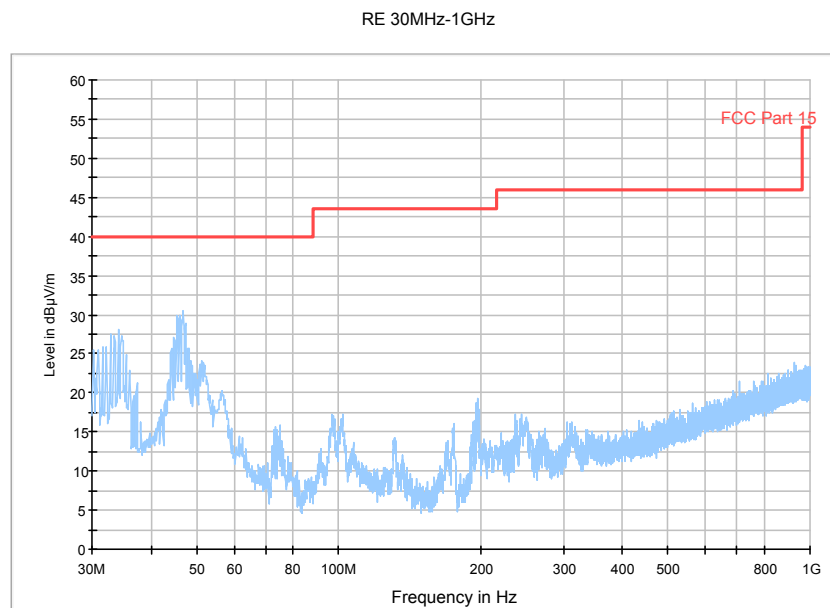


Fig. 69 Radiated Spurious Emission (802.11ac-HT40, ch36, 30 MHz-1 GHz)


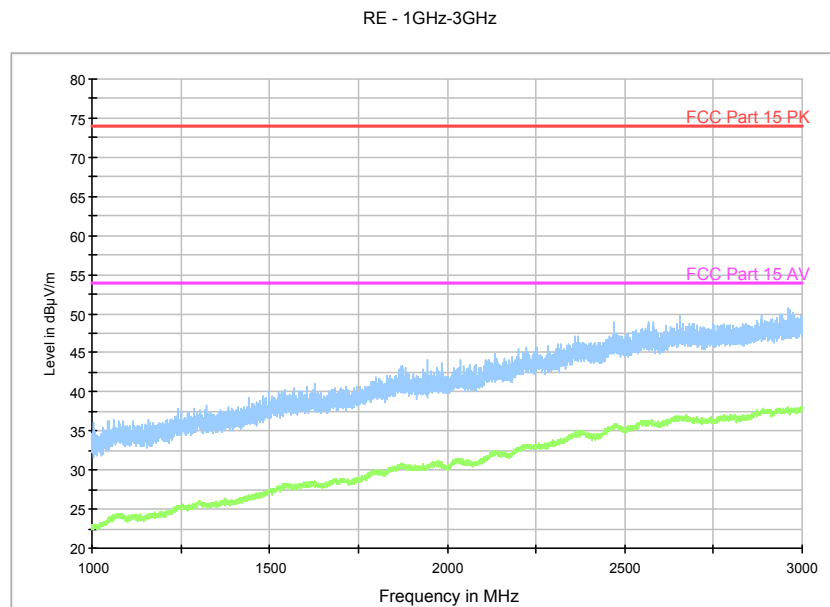


Fig. 70 Radiated Spurious Emission (802.11ac-HT40, ch38, 1 GHz-3 GHz)

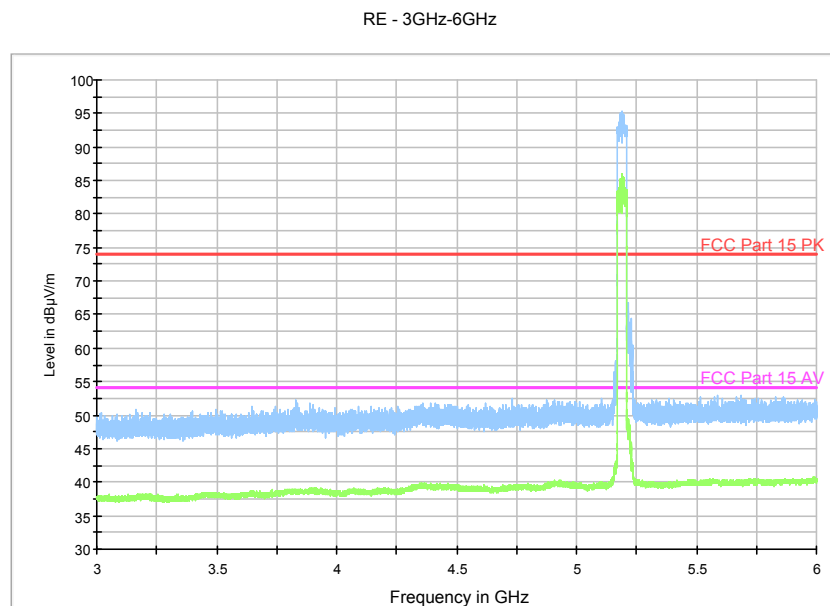

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 71 Radiated Spurious Emission (802.11ac-HT40, ch36, 3 GHz-6 GHz)

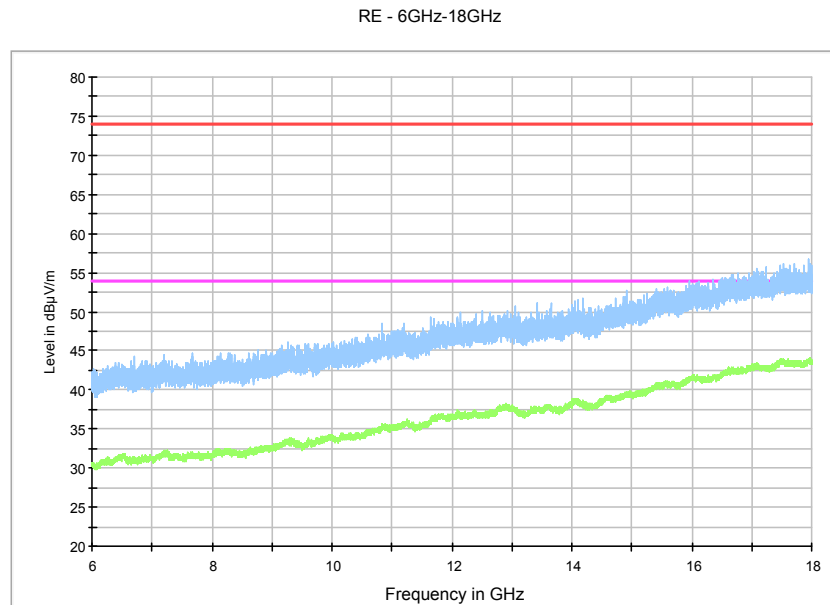


Fig. 72 Radiated Spurious Emission (802.11ac-HT40, ch38, 6 GHz-18 GHz)

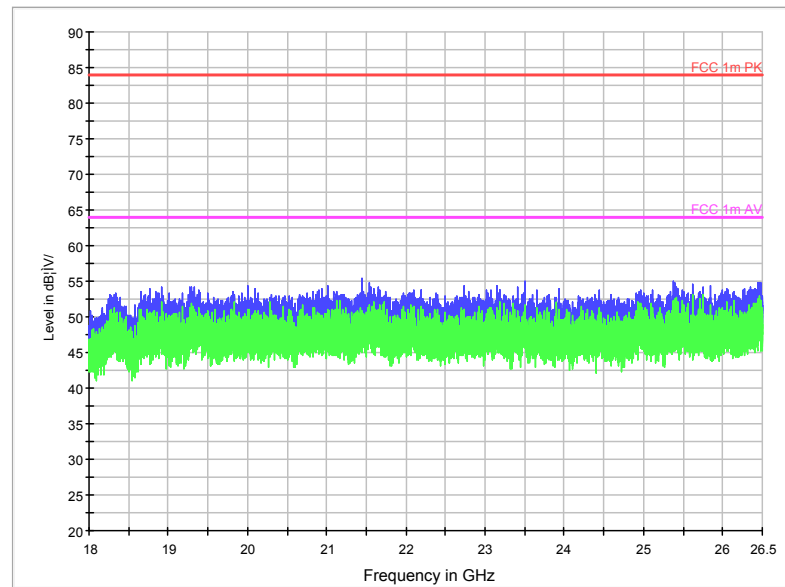


Fig. 73 Radiated Spurious Emission (802.11ac-HT40, ch36, 18 GHz-26.5 GHz)

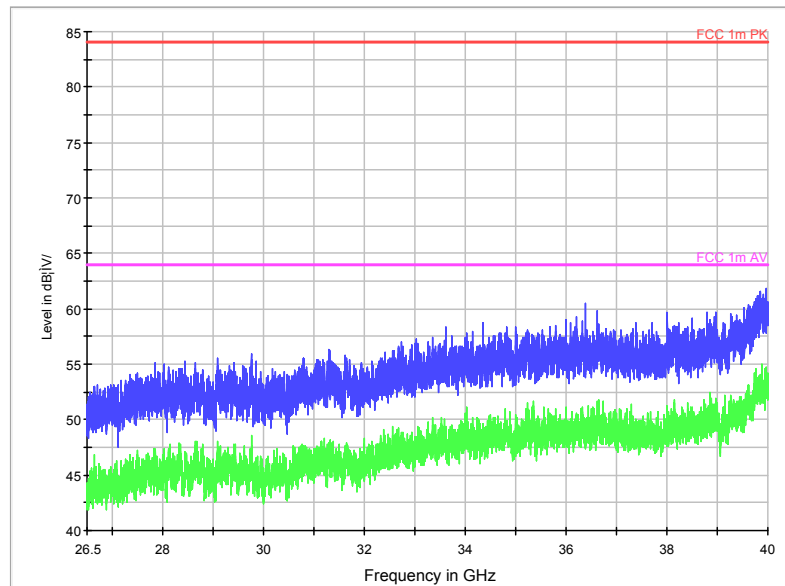


Fig. 74 Radiated Spurious Emission (802.11ac-HT40, ch36, 26.5 GHz-40 GHz)


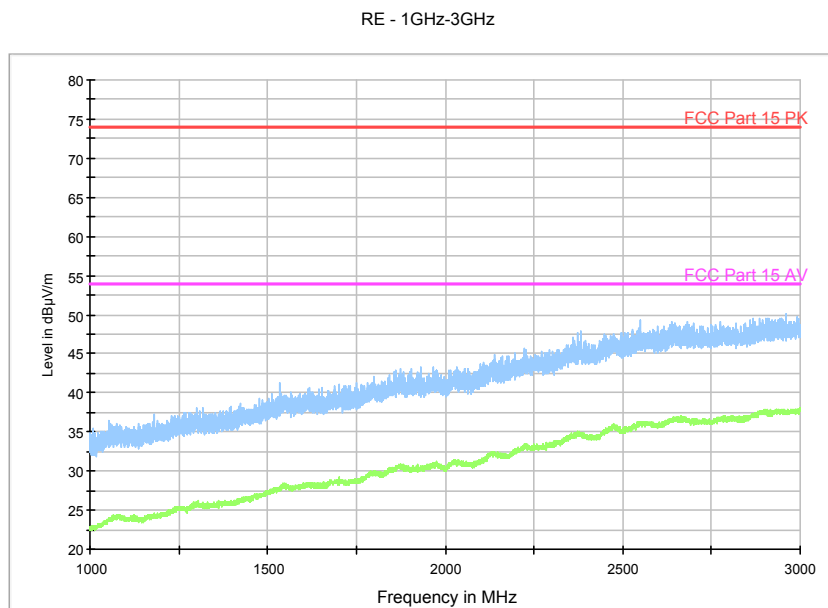


Fig. 75 Radiated Spurious Emission (802.11ac-HT40, ch44, 1 GHz-3 GHz)

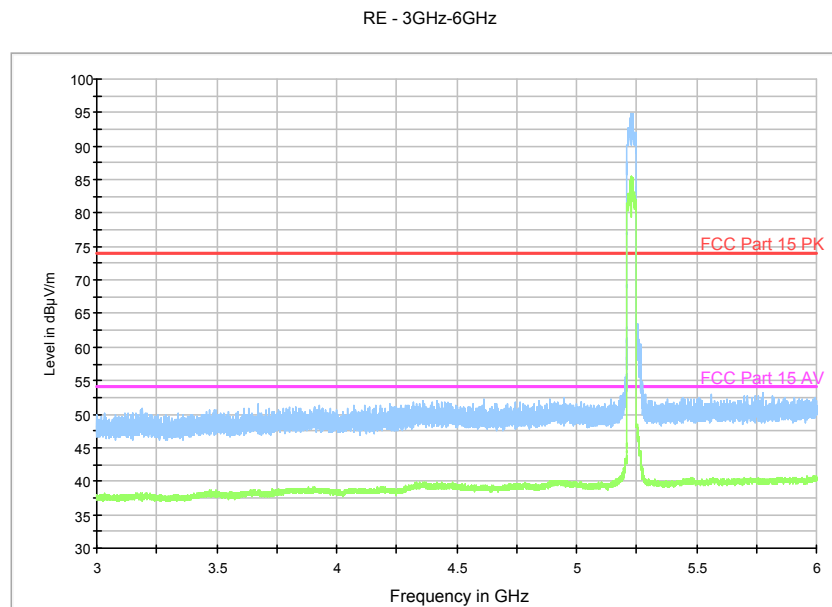

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 76 Radiated Spurious Emission (802.11ac-HT40, ch44, 3 GHz-6 GHz)

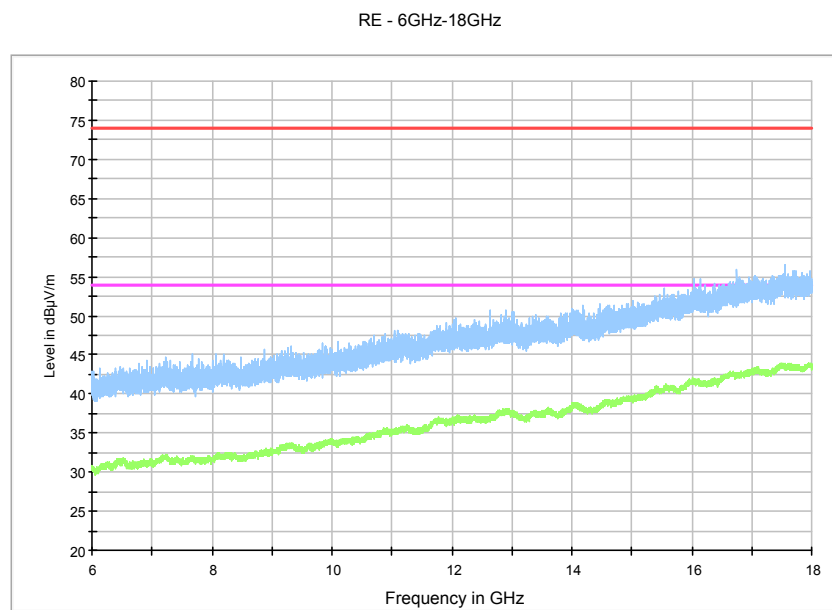


Fig. 77 Radiated Spurious Emission (802.11ac-HT40, ch46, 6 GHz-18 GHz)

5GHz U-NII 2A

802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	52(5260MHz)	1 GHz ~ 3 GHz	Fig.78	P
		3 GHz ~ 6 GHz	Fig.79	P
		6 GHz ~ 18 GHz	Fig.80	P
	56(5280MHz)	30 MHz ~1 GHz	Fig.81	P
		1 GHz ~ 3 GHz	Fig.82	P
		3 GHz ~ 6 GHz	Fig.83	P
		6 GHz ~ 18 GHz	Fig.84	P
		18 GHz ~ 26.5 GHz	Fig.85	P
		26.5 GHz ~ 40 GHz	Fig.86	P
	64(5320MHz)	1 GHz ~ 3 GHz	Fig.87	P
		3 GHz ~ 6 GHz	Fig.88	P
		6 GHz ~ 18 GHz	Fig.89	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n -HT20	52(5260MHz)	1 GHz ~ 3 GHz	Fig.90	P
		3 GHz ~ 6 GHz	Fig.91	P
		6 GHz ~ 18 GHz	Fig.92	P
	56(5280MHz)	30 MHz ~1 GHz	Fig.93	P
		1 GHz ~ 3 GHz	Fig.94	P
		3 GHz ~ 6 GHz	Fig.95	P
		6 GHz ~ 18 GHz	Fig.96	P
		18 GHz ~ 26.5 GHz	Fig.97	P
		26.5 GHz ~ 40 GHz	Fig.98	P
	64(5320MHz)	1 GHz ~ 3 GHz	Fig.99	P
		3 GHz ~ 6 GHz	Fig.100	P
		6 GHz ~ 18 GHz	Fig.101	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	52(5270MHz)	30 MHz ~1 GHz	Fig.102	P
		1 GHz ~ 3 GHz	Fig.103	P
		3 GHz ~ 6 GHz	Fig.104	P
		6 GHz ~ 18 GHz	Fig.105	P
		18 GHz ~ 26.5 GHz	Fig.106	P
		26.5 GHz ~ 40 GHz	Fig.107	P
	60(5310MHz)	1 GHz ~ 3 GHz	Fig.108	P
		3 GHz ~ 6 GHz	Fig.109	P
		6 GHz ~ 18 GHz	Fig.110	P

802.11ac-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n -HT20	52(5260MHz)	1 GHz ~ 3 GHz	Fig.111	P
		3 GHz ~ 6 GHz	Fig.112	P
		6 GHz ~ 18 GHz	Fig.113	P
	56(5280MHz)	30 MHz ~1 GHz	Fig.114	P
		1 GHz ~ 3 GHz	Fig.115	P
		3 GHz ~ 6 GHz	Fig.116	P
		6 GHz ~ 18 GHz	Fig.117	P
		18 GHz ~ 26.5 GHz	Fig.118	P
		26.5 GHz ~ 40 GHz	Fig.119	P
	64(5320MHz)	1 GHz ~ 3 GHz	Fig.120	P
		3 GHz ~ 6 GHz	Fig.121	P
		6 GHz ~ 18 GHz	Fig.122	P

802.11ac-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	52(5270MHz)	30 MHz ~1 GHz	Fig.123	P
		1 GHz ~ 3 GHz	Fig.124	P
		3 GHz ~ 6 GHz	Fig.125	P
		6 GHz ~ 18 GHz	Fig.126	P
		18 GHz ~ 26.5 GHz	Fig.127	P
		26.5 GHz ~ 40 GHz	Fig.128	P
	60(5310MHz)	1 GHz ~ 3 GHz	Fig.129	P
		3 GHz ~ 6 GHz	Fig.130	P
		6 GHz ~ 18 GHz	Fig.131	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

5GHz U-NII 2A
802.11a

Channel 52

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
18000.000	44.1	-23.1	40.8	26.434	H
17999.400	44.0	-23.0	41.0	26.047	V
17998.800	43.9	-23.0	41.0	25.947	H
17998.200	43.9	-23.0	41.0	25.947	V
17997.600	43.9	-23.0	41.0	25.947	V
17997.000	43.9	-23.0	41.0	25.947	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17463.000	56.3	-23.9	41.2	38.953	H
17839.800	56.3	-23.3	41.0	38.633	H
17967.000	56.0	-23.3	41.0	38.333	H
17986.200	56.0	-23.3	41.0	38.333	H
17556.000	55.8	-23.9	41.2	38.453	H
17494.800	55.8	-23.9	41.2	38.453	H

Channel 56

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17970.600	44.0	-23.3	41.0	26.333	V
17511.000	44.0	-23.9	41.2	26.653	H
17994.000	44.0	-23.0	41.0	26.047	V
17469.000	44.0	-23.9	41.2	26.653	V
17486.400	43.9	-23.9	41.2	26.553	V
17956.800	43.9	-23.3	41.0	26.233	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17942.400	56.5	-23.3	41.0	38.833	V
17626.800	56.2	-23.9	41.2	38.853	H
17706.000	56.2	-23.4	41.2	38.372	V
17455.800	55.9	-24.3	41.2	38.969	H
17183.400	55.6	-24.2	41.4	38.385	V
16790.400	55.6	-24.7	41.5	38.847	H

Channel 64

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5350.740	46.4	-33.9	34.4	45.872	V
17515.200	54.5	-23.9	41.2	37.153	V
17962.200	53.2	-23.3	41.0	35.533	V
17994.000	54.1	-23.0	41.0	36.147	H
17496.000	54.1	-23.9	41.2	36.753	V
17954.400	53.2	-23.3	41.0	35.533	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5350.730	60.6	-33.9	34.4	60.072	V
18000.000	53.3	-23.1	40.8	35.634	H
17999.400	53.7	-23.0	41.0	35.747	V
17998.800	53.3	-23.0	41.0	35.347	V
17998.200	54.3	-23.0	41.0	36.347	V
17997.600	54.5	-23.0	41.0	36.547	H

802.11n-HT20

Channel 52

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17637.600	44.0	-23.4	41.2	26.172	V
17660.400	43.9	-23.4	41.2	26.072	H
17977.200	43.9	-23.3	41.0	26.233	H
17502.600	43.9	-23.9	41.2	26.553	H
17986.200	43.9	-23.3	41.0	26.233	H
17557.200	43.9	-23.9	41.2	26.553	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17423.400	56.6	-24.3	41.2	39.669	H
17814.600	56.4	-23.3	41.0	38.733	V
17457.000	56.1	-24.3	41.2	39.169	H
17635.200	56.1	-23.4	41.2	38.272	H
17508.000	56.0	-23.9	41.2	38.653	V
17824.800	55.9	-23.3	41.0	38.233	H

Channel 56

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17935.200	44.0	-23.3	41.0	26.333	H
17505.000	44.0	-23.9	41.2	26.653	H
17977.200	43.9	-23.3	41.0	26.233	V
17505.600	43.9	-23.9	41.2	26.553	H
17639.400	43.9	-23.4	41.2	26.072	V
17925.000	43.9	-23.3	41.0	26.233	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17517.000	56.1	-23.9	41.2	38.753	H
17917.200	56.1	-23.3	41.0	38.433	H
17920.200	56.1	-23.3	41.0	38.433	H
17783.400	56.0	-23.4	41.0	38.372	H
17888.400	56.0	-23.3	41.0	38.333	V
17171.400	56.0	-24.2	41.4	38.785	V

Channel 64

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5351.050	46.3	-33.9	34.4	45.772	H
17971.200	44.1	-23.3	41.0	26.433	H
17509.800	44.1	-23.9	41.2	26.753	H
17512.800	44.0	-23.9	41.2	26.653	H
17519.400	44.0	-23.9	41.2	26.653	H
17548.800	43.9	-23.9	41.2	26.553	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5352.450	59.2	-33.9	34.4	58.672	H
17982.000	56.0	-23.3	41.0	38.333	H
17941.800	55.9	-23.3	41.0	38.233	V
17529.600	55.8	-23.9	41.2	38.453	H
17611.200	55.8	-23.9	41.2	38.453	H
16789.800	55.7	-24.7	41.5	38.947	V

802.11n-HT40

Channel 52

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17989.200	44.1	-23.0	41.0	26.147	V
17962.800	44.1	-23.3	41.0	26.433	V
17493.600	44.1	-23.9	41.2	26.753	H
17520.600	44.0	-23.9	41.2	26.653	V
17486.400	44.0	-23.9	41.2	26.653	H
17956.800	44.0	-23.3	41.0	26.333	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17377.200	56.6	-24.3	41.2	39.669	H
17809.800	56.0	-23.3	41.0	38.333	H
17860.800	55.9	-23.3	41.0	38.233	H
17503.200	55.8	-23.9	41.2	38.453	V
17770.800	55.7	-23.4	41.0	38.072	V
17680.800	55.6	-23.4	41.2	37.772	V



Channel 60

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5350.490	46.9	-33.9	34.4	46.372	V
17967.600	44.0	-23.3	41.0	26.333	H
17488.800	43.9	-23.9	41.2	26.553	H
17532.600	43.9	-23.9	41.2	26.553	V
17967.000	43.9	-23.3	41.0	26.233	H
17983.200	43.9	-23.3	41.0	26.233	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5351.160	64.6	-33.9	34.4	64.072	V
17635.200	56.8	-23.4	41.2	38.972	H
17476.800	56.0	-23.9	41.2	38.653	V
17691.600	55.8	-23.4	41.2	37.972	H
17653.800	55.8	-23.4	41.2	37.972	H
17611.800	55.7	-23.9	41.2	38.353	V

802.11ac-HT20

Channel 52

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17973.000	44.0	-23.3	41.0	26.333	H
17487.000	43.9	-23.9	41.2	26.553	V
17563.800	43.9	-23.9	41.2	26.553	H
17530.800	43.9	-23.9	41.2	26.553	H
17974.800	43.9	-23.3	41.0	26.233	H
17969.400	43.9	-23.3	41.0	26.233	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17917.800	56.6	-23.3	41.0	38.933	V
16874.400	56.5	-24.7	41.5	39.747	V
17962.200	56.2	-23.3	41.0	38.533	H
17662.800	56.1	-23.4	41.2	38.272	H
17748.600	55.8	-23.4	41.2	37.972	V
17510.400	55.7	-23.9	41.2	38.353	H

Channel 56

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17481.600	44.0	-23.9	41.2	26.653	V
17982.600	43.9	-23.3	41.0	26.233	V
17532.600	43.9	-23.9	41.2	26.553	H
17496.600	43.9	-23.9	41.2	26.553	V
17973.600	43.9	-23.3	41.0	26.233	H
17699.400	43.9	-23.4	41.2	26.072	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17486.400	56.1	-23.9	41.2	38.753	V
17512.200	56.1	-23.9	41.2	38.753	H
17674.800	56.0	-23.4	41.2	38.172	V
17443.800	56.0	-24.3	41.2	39.069	V
17057.400	55.9	-24.6	41.4	39.115	V
17684.400	55.8	-23.4	41.2	37.972	V

Channel 64

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5350.740	46.4	-33.9	34.4	45.872	V
17511.000	44.0	-23.9	41.2	26.653	H
17979.600	43.9	-23.3	41.0	26.233	H
17954.400	43.9	-23.3	41.0	26.233	V
17697.000	43.9	-23.4	41.2	26.072	H
17980.800	43.9	-23.3	41.0	26.233	H

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5355.830	58.6	-33.9	34.4	58.072	V
17790.600	56.2	-23.4	41.0	38.572	H
17523.000	56.1	-23.9	41.2	38.753	V
17746.200	55.9	-23.4	41.2	38.072	V
17950.800	55.9	-23.3	41.0	38.233	H
17532.000	55.8	-23.9	41.2	38.453	V

802.11ac-HT40

Channel 52

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17886.600	44.0	-23.3	41.0	26.333	V
17626.800	44.0	-23.9	41.2	26.653	V
17937.600	43.9	-23.3	41.0	26.233	H
17630.400	43.9	-23.9	41.2	26.553	V
17631.600	43.9	-23.9	41.2	26.553	H
17982.600	43.9	-23.3	41.0	26.233	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17886.600	56.2	-23.3	41.0	38.533	V
17626.800	56.2	-23.9	41.2	38.853	V
17937.600	56.2	-23.3	41.0	38.533	H
17630.400	56.0	-23.9	41.2	38.653	V
17631.600	55.9	-23.9	41.2	38.553	H
17982.600	55.9	-23.3	41.0	38.233	V

Channel 60

Average:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5351.050	46.3	-33.9	34.4	45.772	H
17953.200	44.0	-23.3	41.0	26.333	V
17968.200	44.0	-23.3	41.0	26.333	H
17982.000	43.9	-23.3	41.0	26.233	H
17533.800	43.9	-23.9	41.2	26.553	V
17523.000	43.9	-23.9	41.2	26.553	V

Peak:

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5352.460	62.8	-33.9	34.4	62.272	V
17808.000	56.4	-23.4	41.0	38.772	H
17601.000	56.3	-23.9	41.2	38.953	H
17971.800	55.9	-23.3	41.0	38.233	V
17962.800	55.9	-23.3	41.0	38.233	H
17998.800	55.7	-23.0	41.0	37.747	V

Test graphs as below:


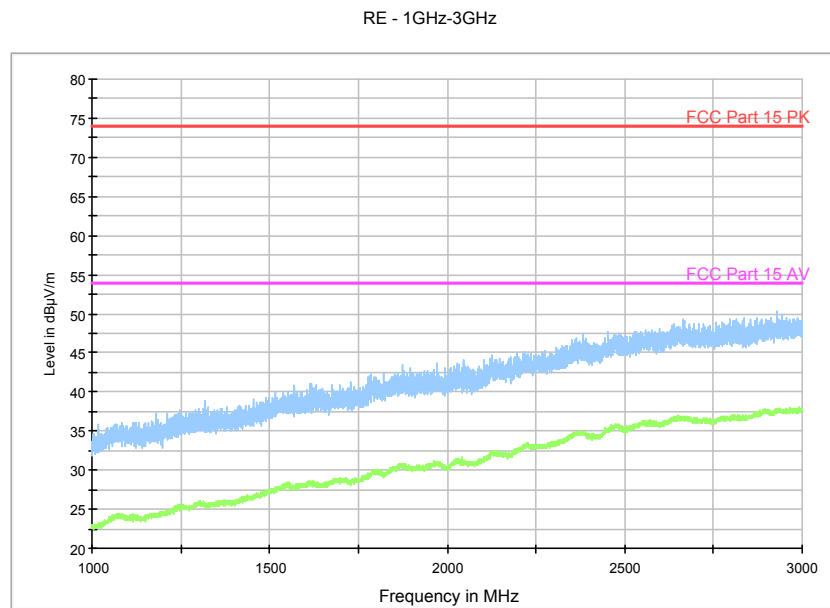


Fig. 78 Radiated Spurious Emission (802.11a, ch52, 1 GHz-3 GHz)

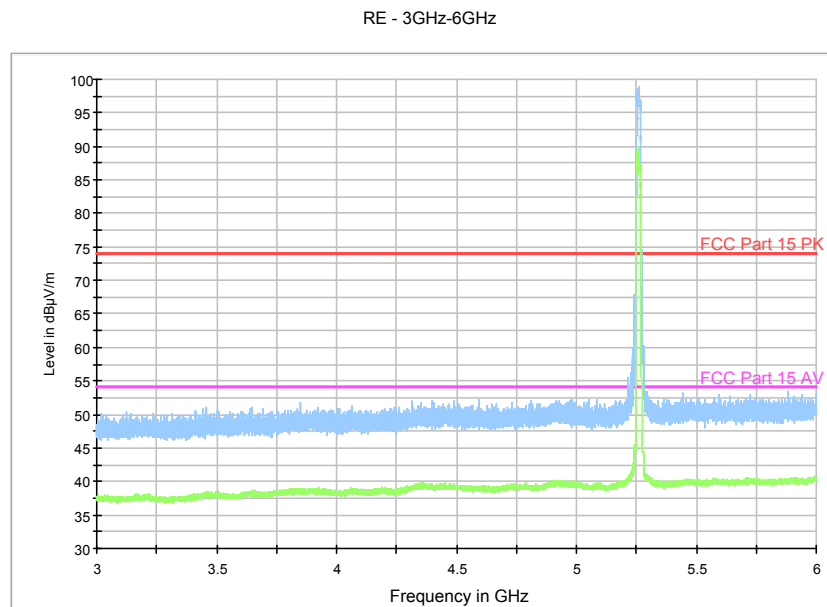

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 79 Radiated Spurious Emission (802.11a, ch52, 3 GHz-6 GHz)

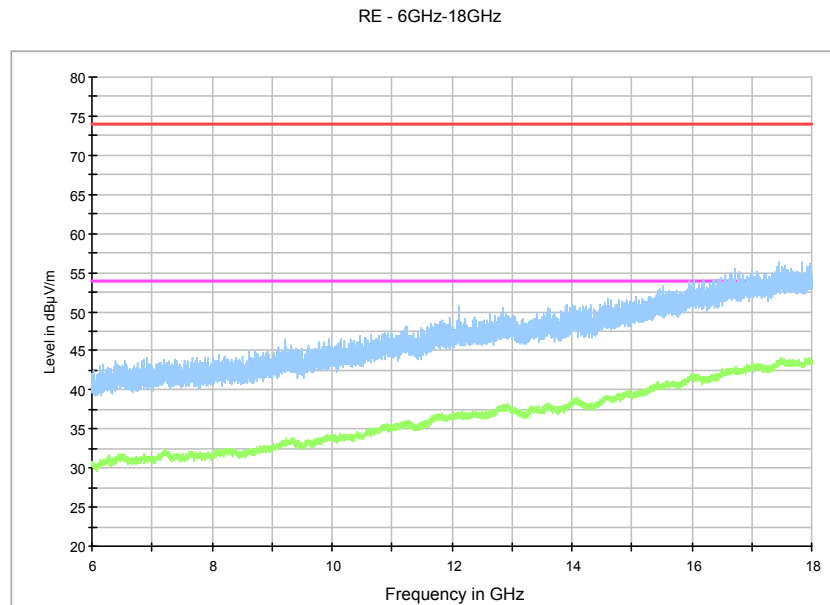


Fig. 80 Radiated Spurious Emission (802.11a, ch52, 6 GHz-18 GHz)

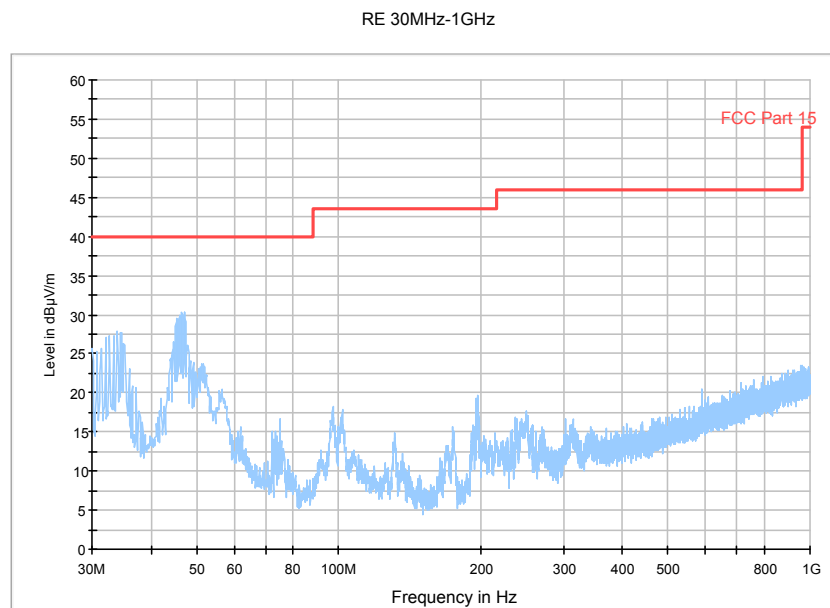


Fig. 81 Radiated Spurious Emission (802.11a, ch56, 30 MHz-1 GHz)


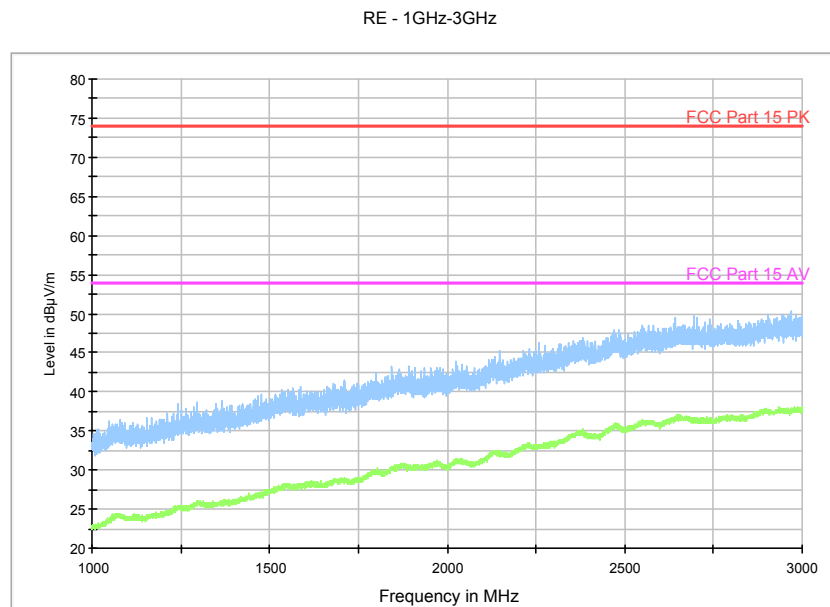


Fig. 82 Radiated Spurious Emission (802.11a, ch56, 1 GHz-3 GHz)

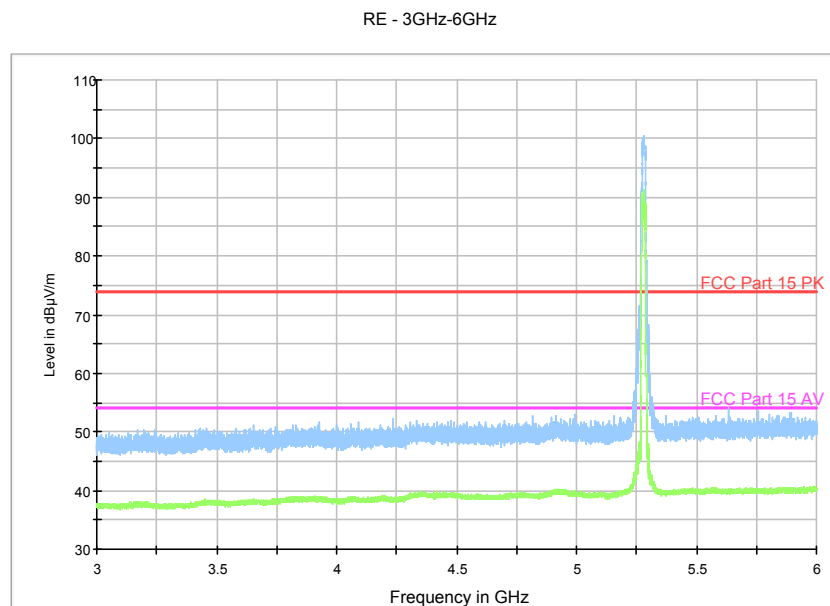

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 83 Radiated Spurious Emission (802.11a, ch56, 3 GHz-6 GHz)

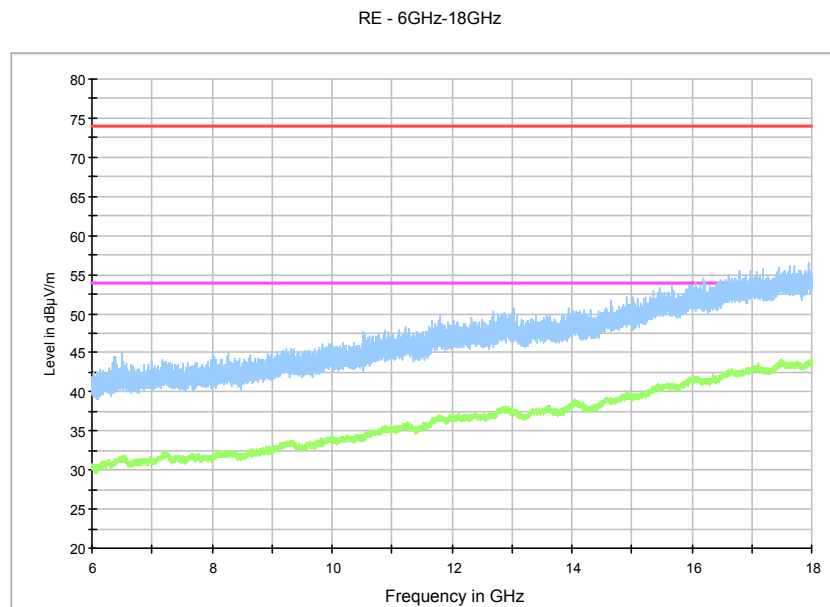


Fig. 84 Radiated Spurious Emission (802.11a, ch56, 6 GHz-18 GHz)

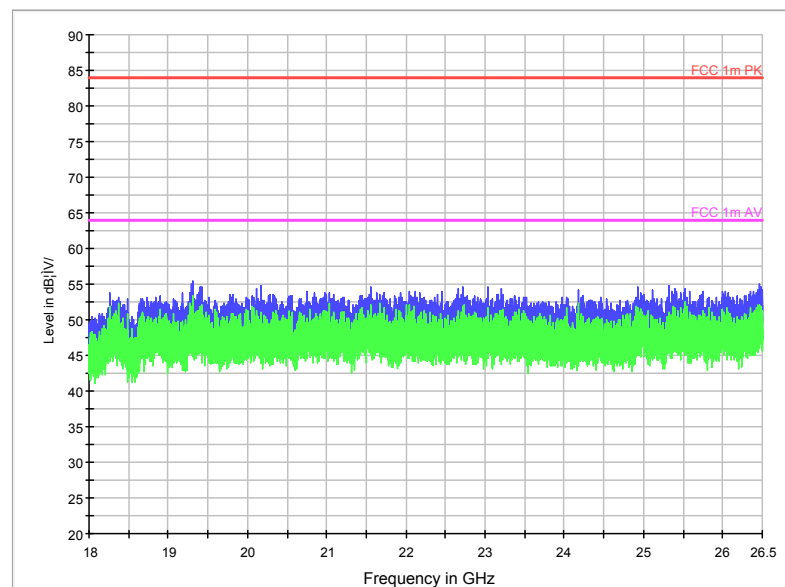


Fig. 85 Radiated Spurious Emission (802.11a, ch56, 18 GHz-26.5 GHz)

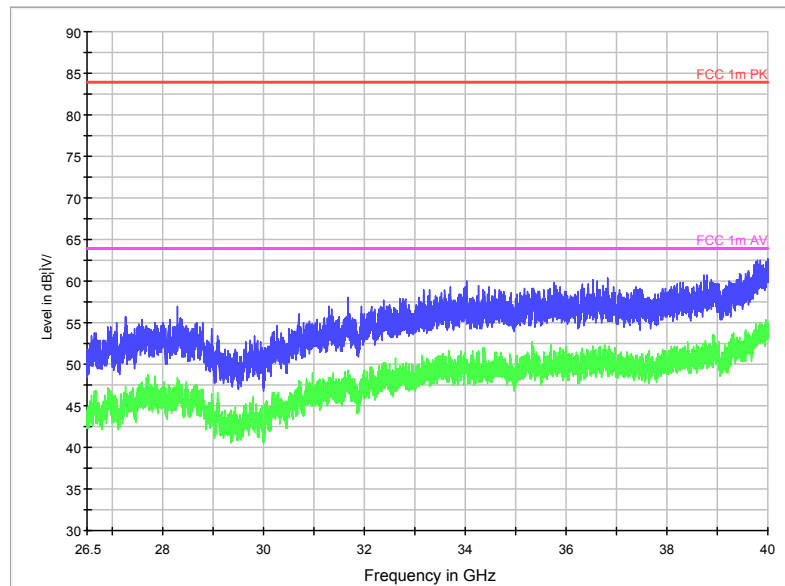


Fig. 86 Radiated Spurious Emission (802.11a, ch56, 26.5 GHz-40 GHz)


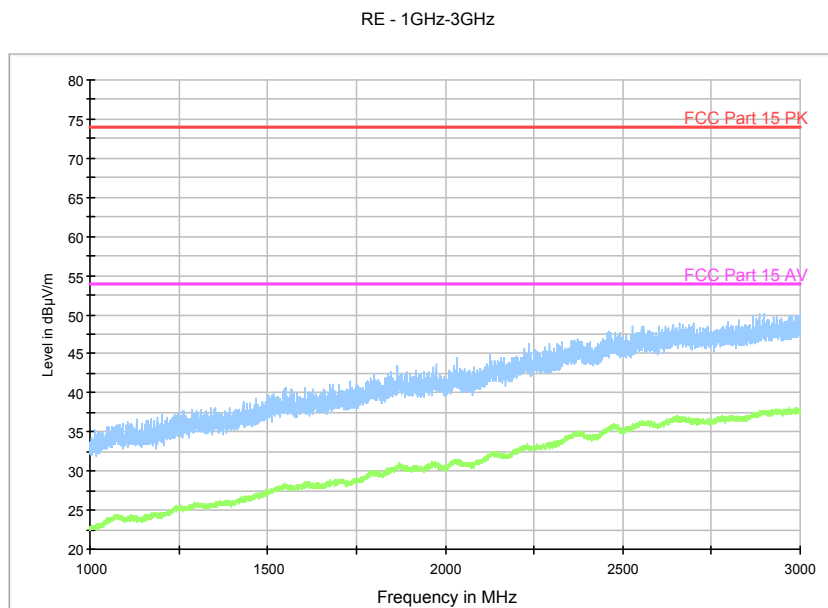


Fig. 87 Radiated Spurious Emission (802.11a, ch64, 1 GHz-3 GHz)

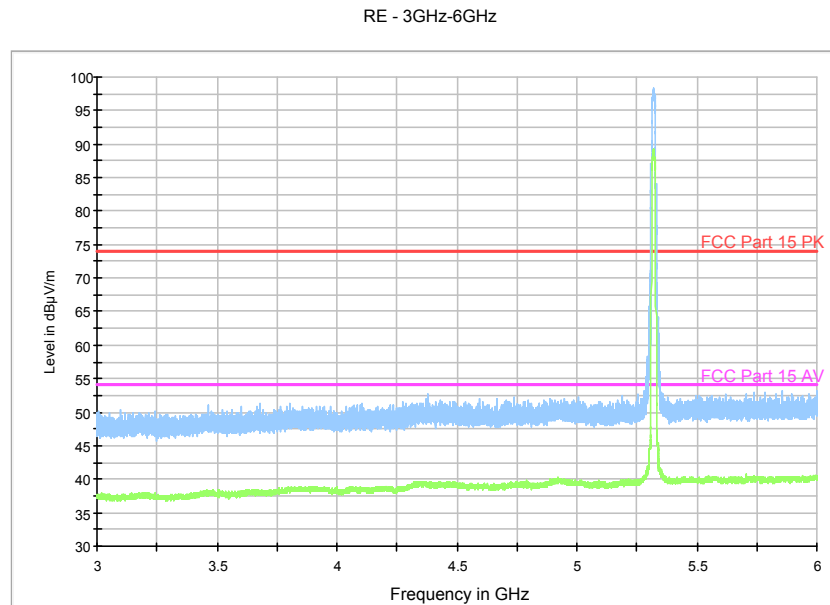

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 88 Radiated Spurious Emission (802.11a, ch64, 3GHz- 6 GHz)

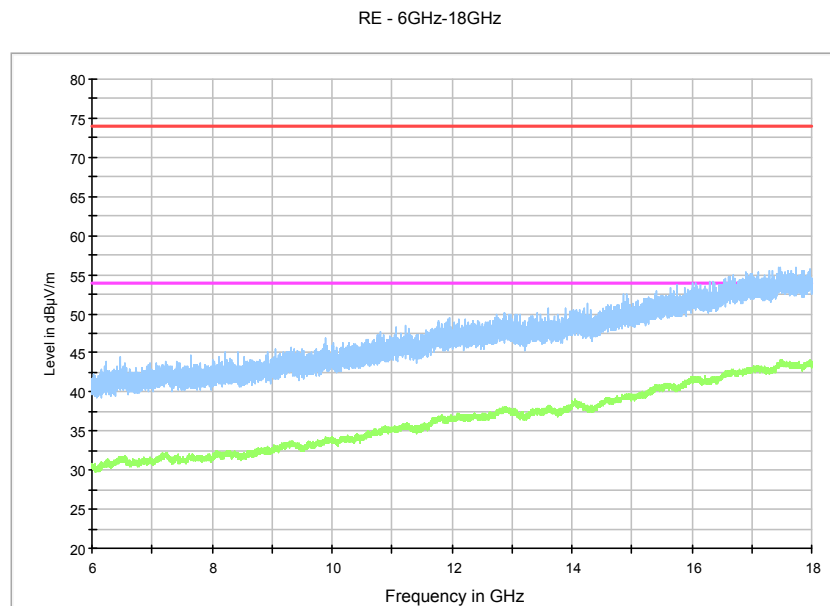


Fig. 89 Radiated Spurious Emission (802.11a, ch64, 6 GHz-18GHz)


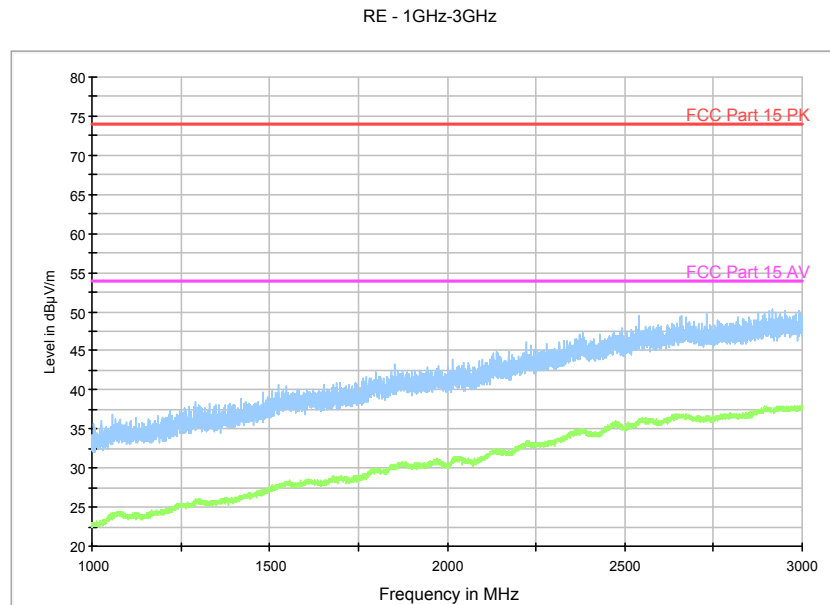


Fig. 90 Radiated Spurious Emission (802.11n-HT20, ch52, 1 GHz-3 GHz)

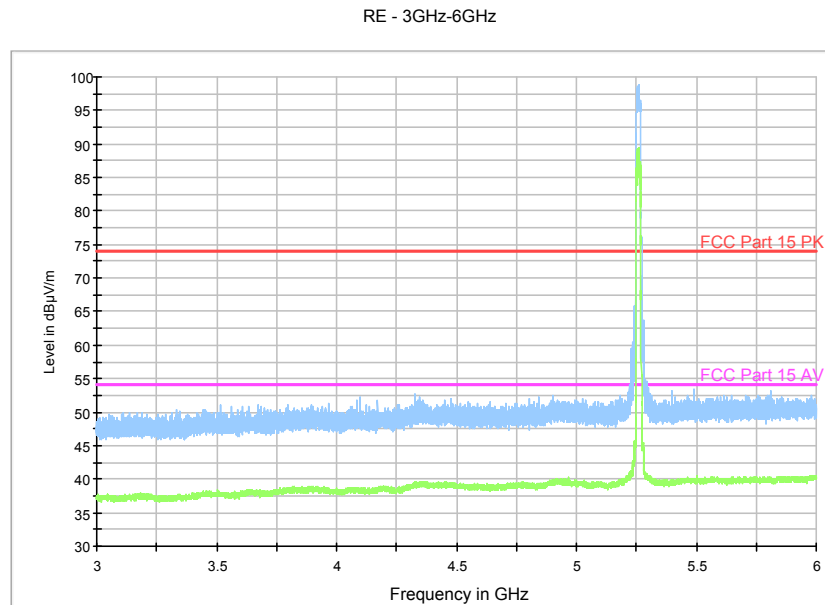

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 91 Radiated Spurious Emission (802.11n-HT20, ch52, 3 GHz-6GHz)

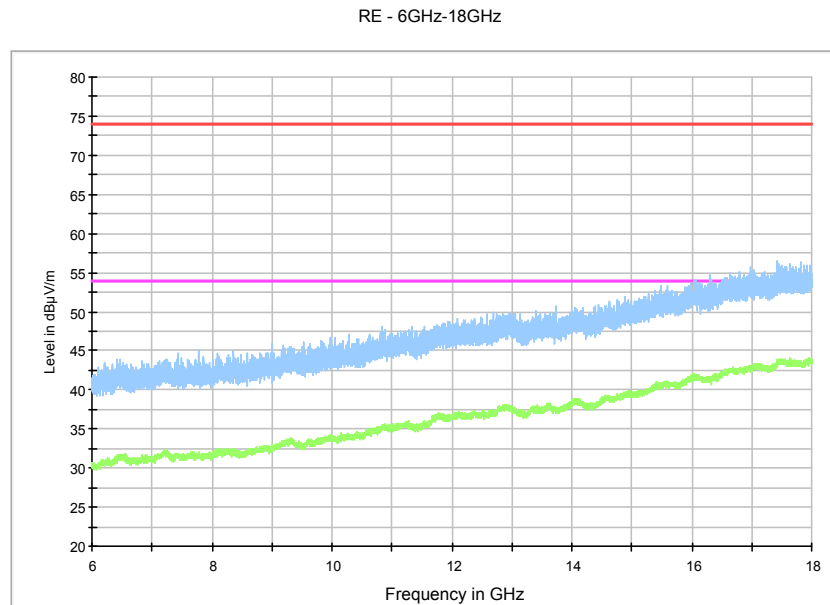


Fig. 92 Radiated Spurious Emission (802.11n-HT20, ch52, 6 GHz-18GHz)

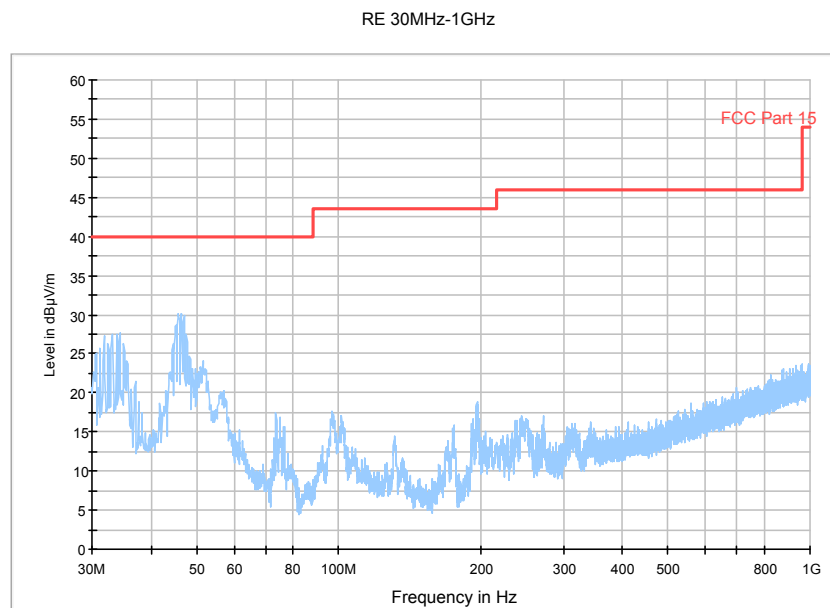


Fig. 93 Radiated Spurious Emission (802.11n-HT20, ch56, 30 MHz-1 GHz)


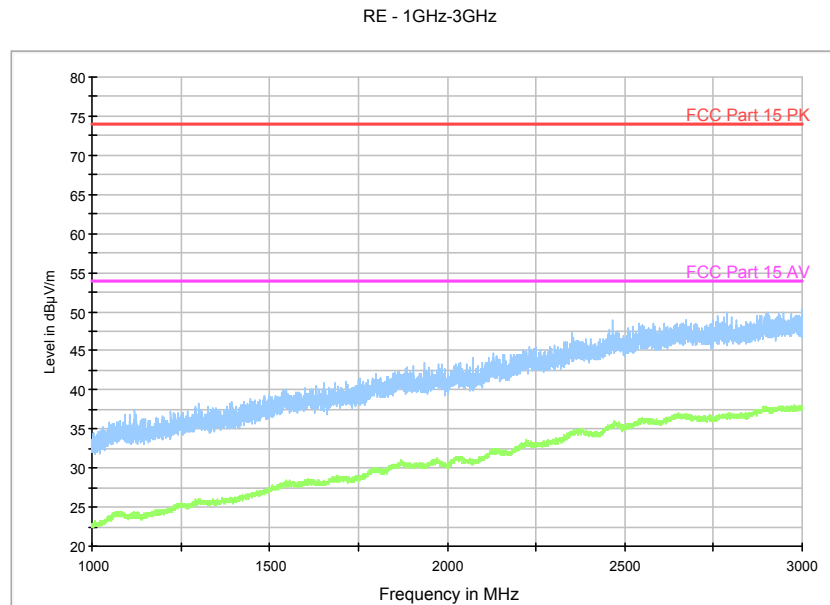


Fig. 94 Radiated Spurious Emission (802.11n-HT20, ch56, 1 GHz-3 GHz)

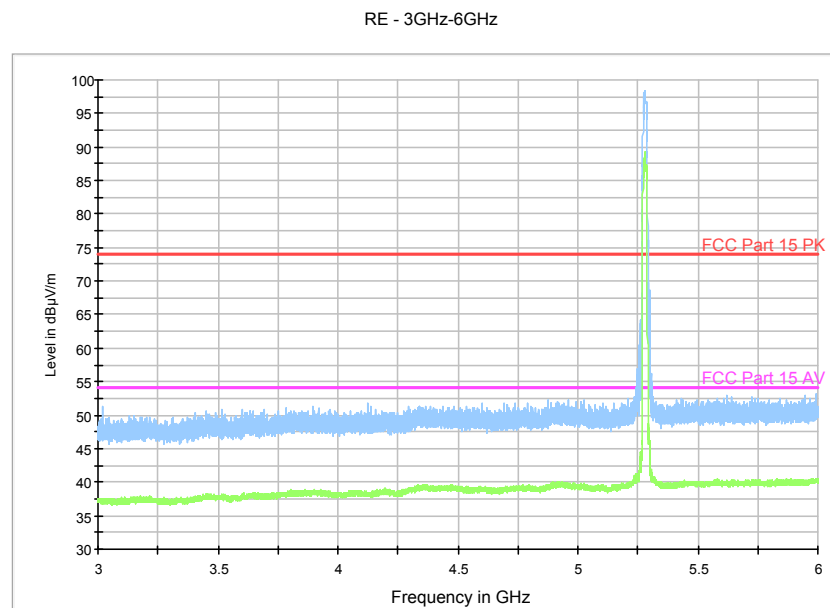

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 95 Radiated Spurious Emission (802.11n-HT20, ch56, 3GHz-6 GHz)

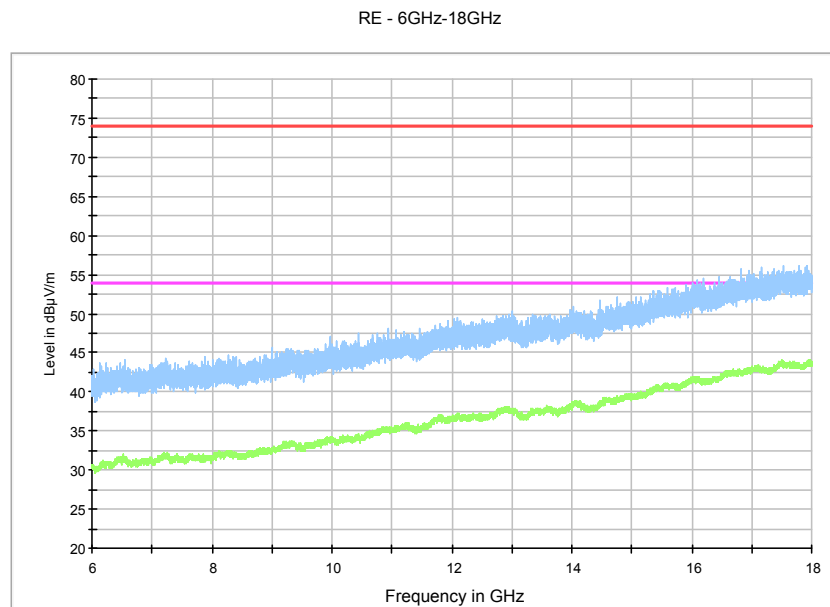


Fig. 96 Radiated Spurious Emission (802.11n-HT20, ch56, 6 GHz-18 GHz)

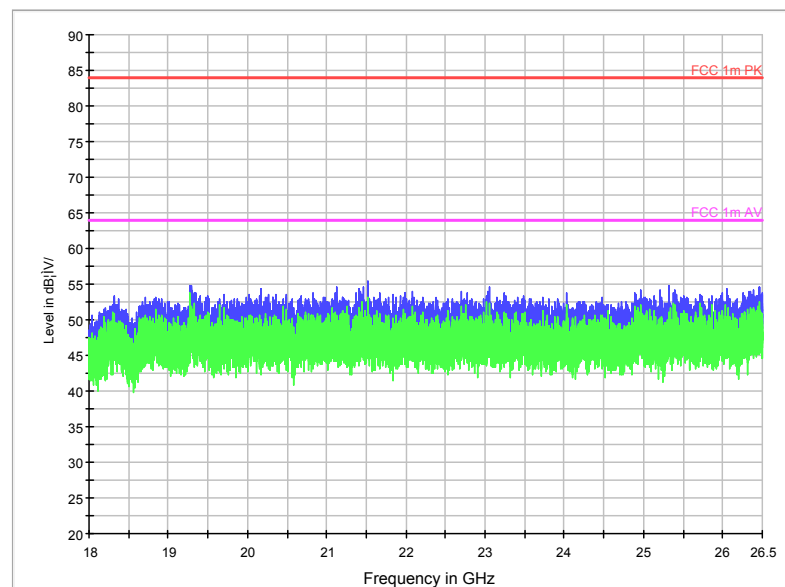


Fig. 97 Radiated Spurious Emission (802.11n-HT20, ch56, 18 GHz-26.5 GHz)

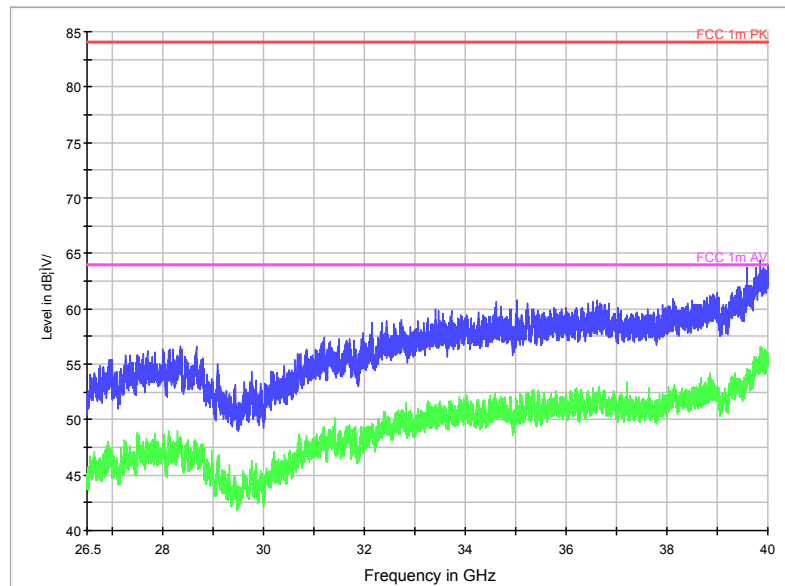


Fig. 98 Radiated Spurious Emission (802.11n-HT20, ch56, 26.5 GHz-40 GHz)


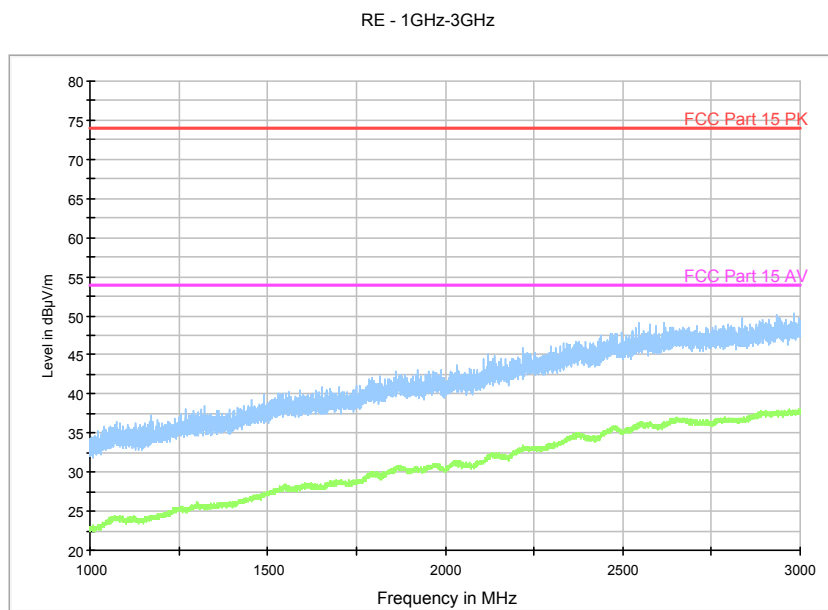


Fig. 99 Radiated Spurious Emission (802.11n-HT20, ch64, 1 GHz-3GHz)

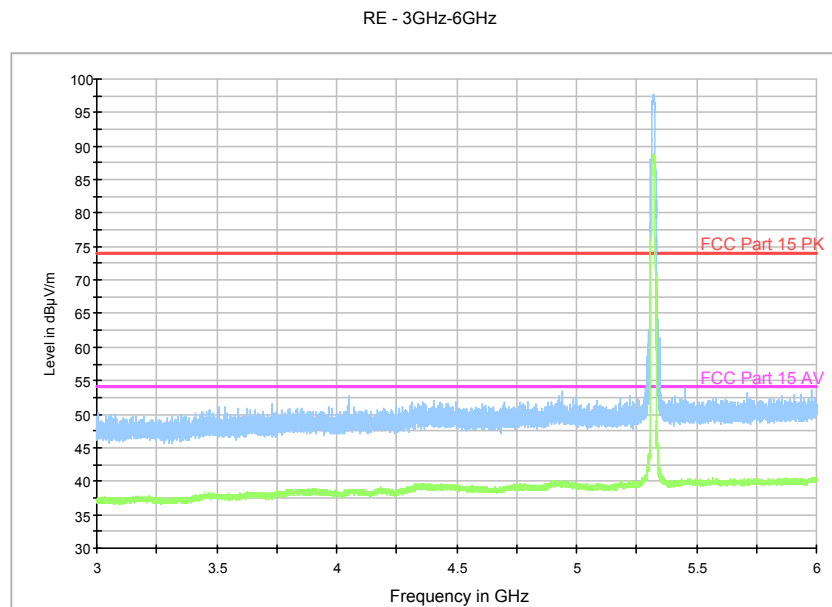

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 100 Radiated Spurious Emission (802.11n-HT20, ch64, 3 GHz-6GHz)

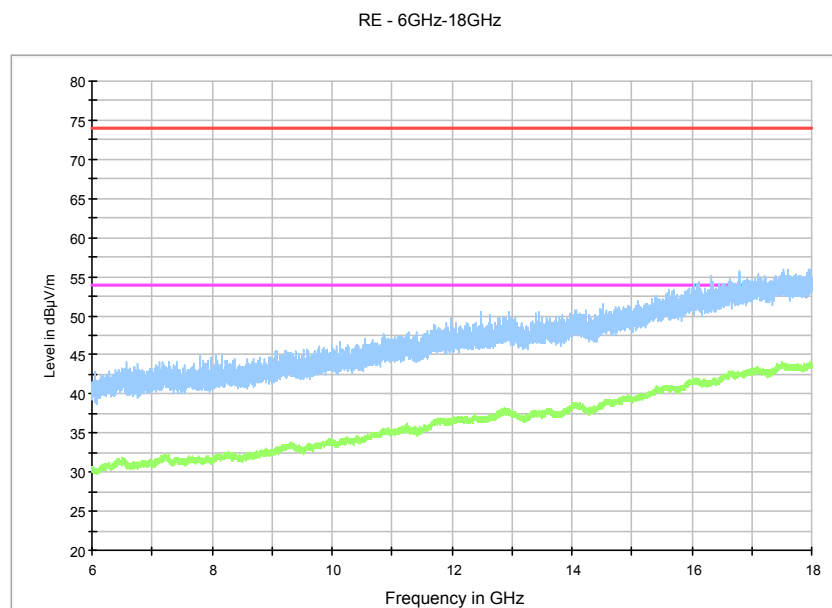


Fig. 101 Radiated Spurious Emission (802.11n-HT20, ch64, 6 GHz-18 GHz)

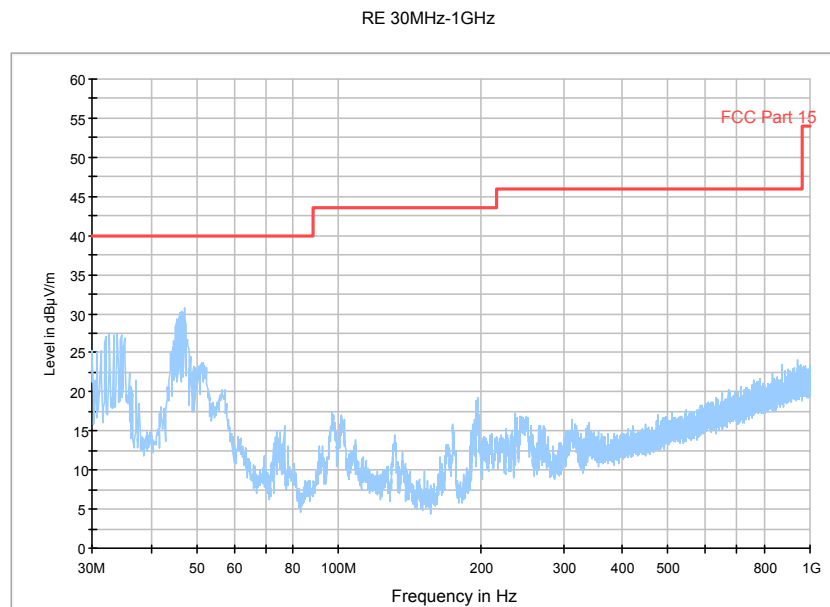


Fig. 102 Radiated Spurious Emission (802.11n-HT40, ch52, 30 MHz-1 GHz)


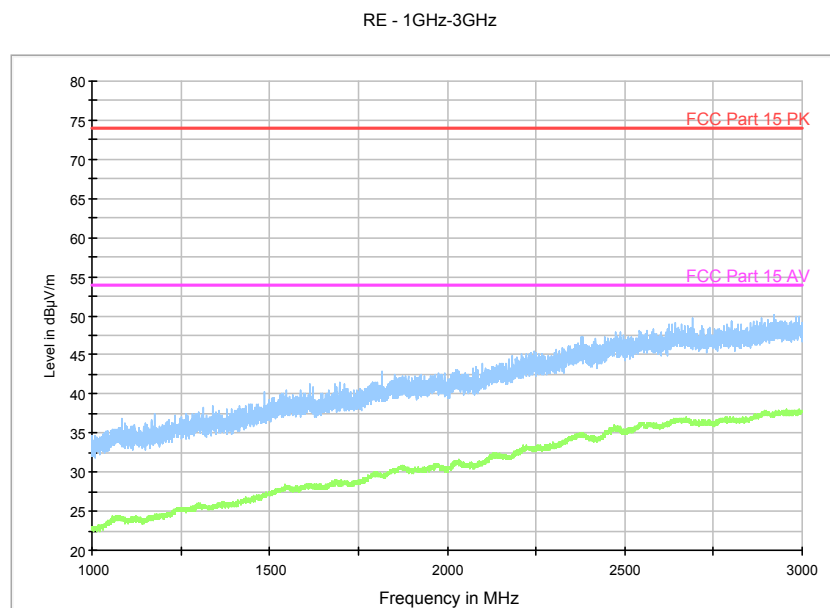


Fig. 103 Radiated Spurious Emission (802.11n-HT40, ch52, 1 GHz-3 GHz)

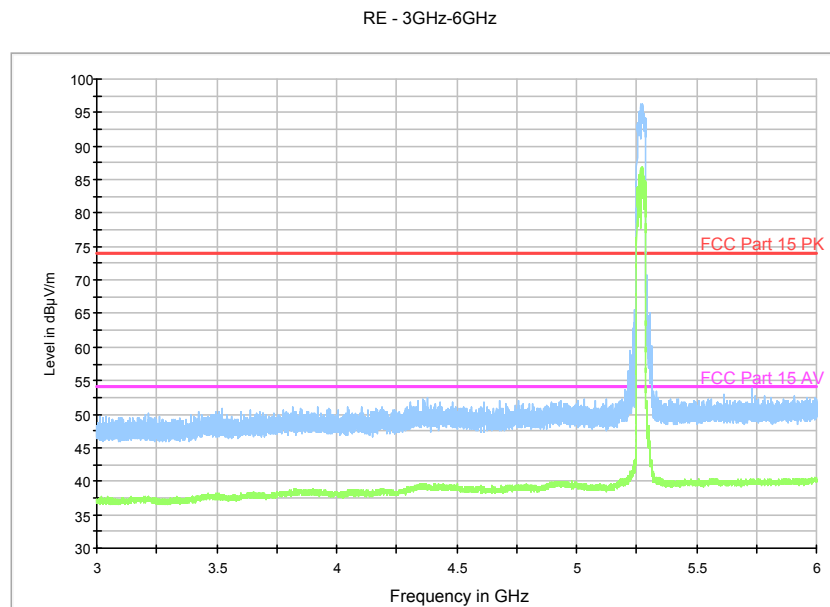

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 104 Radiated Spurious Emission (802.11n-HT40, ch52, 3 GHz-6 GHz)

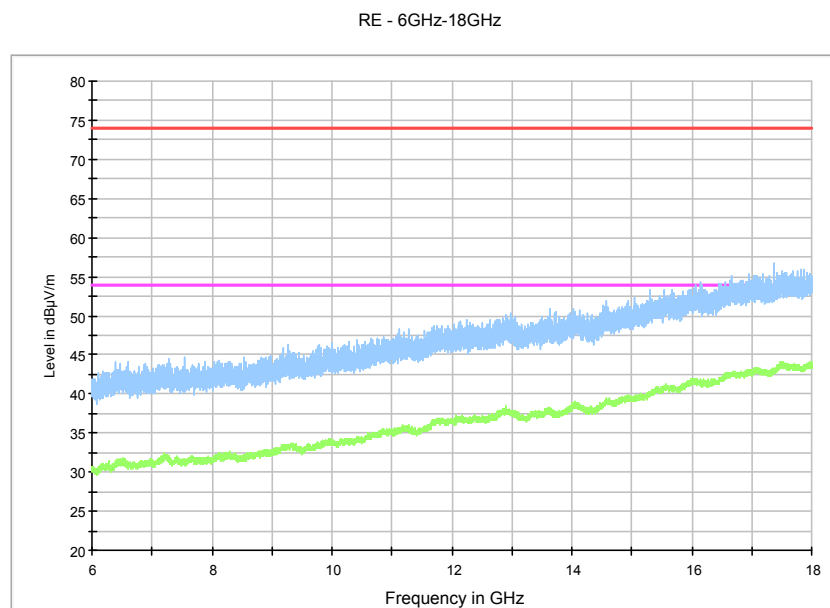


Fig. 105 Radiated Spurious Emission (802.11n-HT40, ch52, 6 GHz-18 GHz)

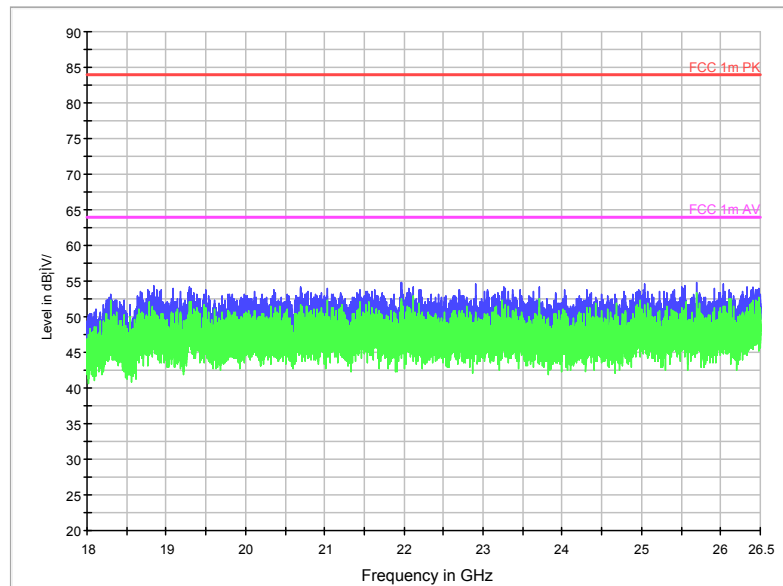


Fig. 106 Radiated Spurious Emission (802.11n-HT40, ch52, 18 GHz-26.5 GHz)

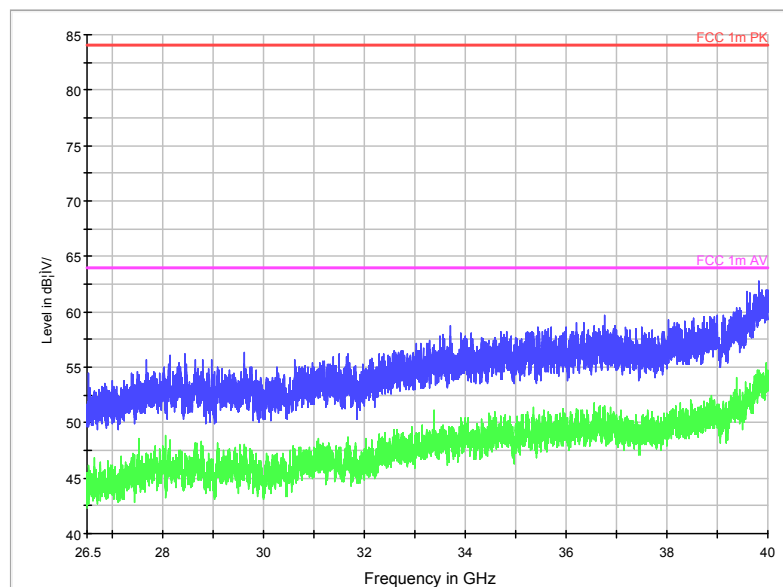


Fig. 107 Radiated Spurious Emission (802.11n-HT40, ch52, 26.5 GHz-40 GHz)


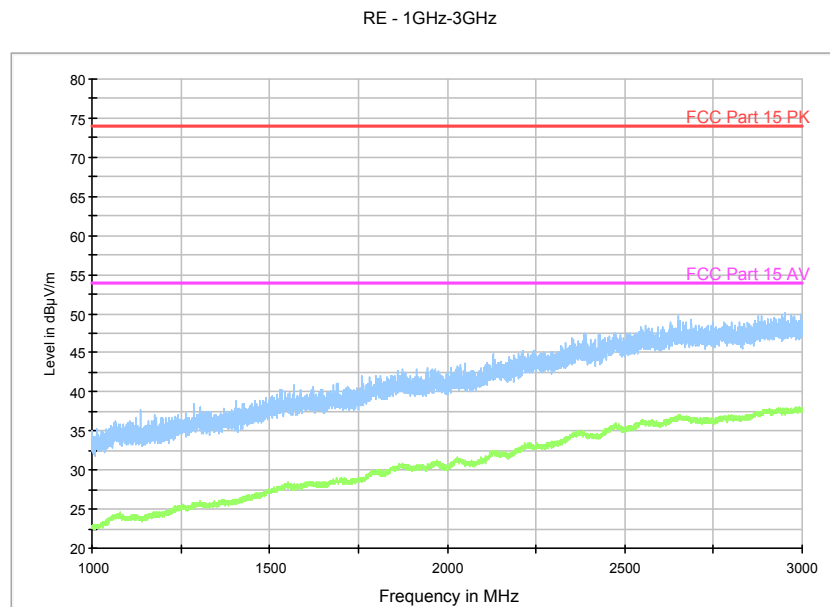


Fig. 108 Radiated Spurious Emission (802.11n-HT40, ch60, 1 GHz-3 GHz)

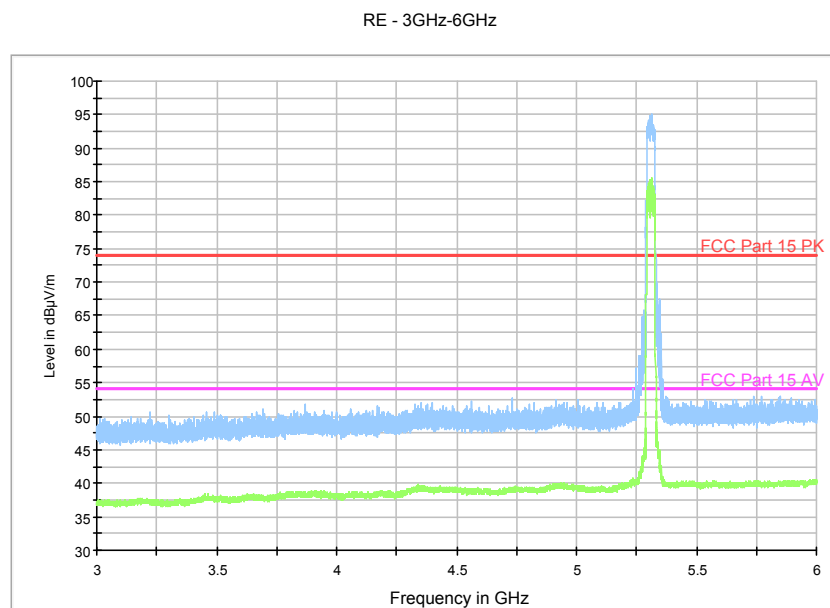

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 109 Radiated Spurious Emission (802.11n-HT40, ch60, 3 GHz-6 GHz)

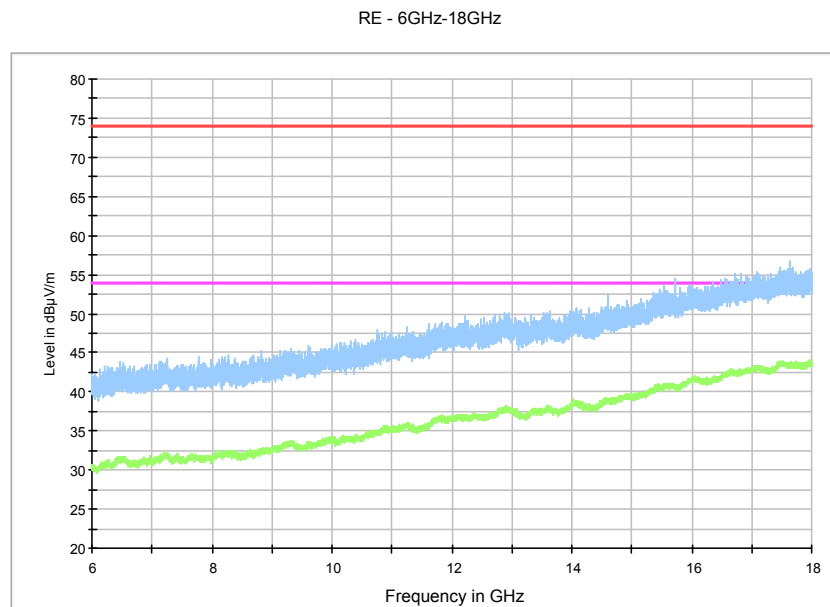


Fig. 110 Radiated Spurious Emission (802.11n-HT40, ch60, 6 GHz-18 GHz)


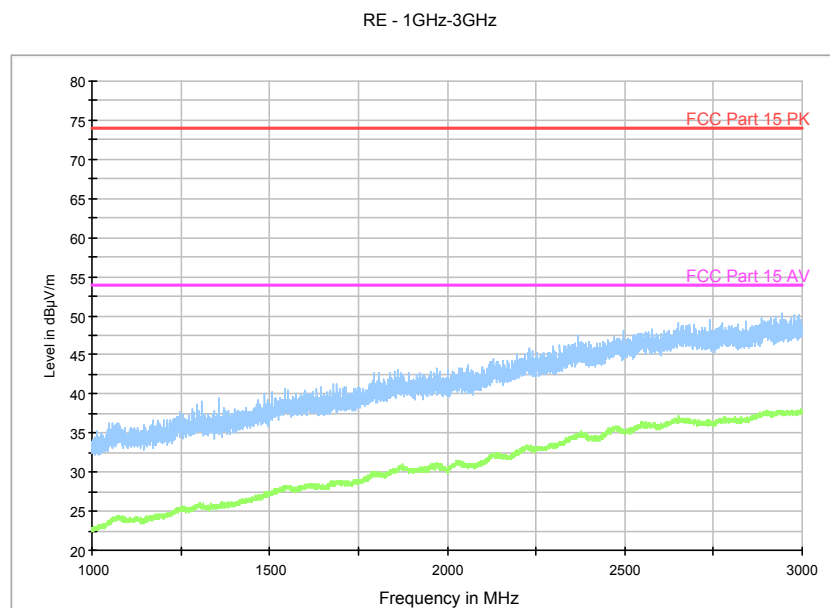


Fig. 111 Radiated Spurious Emission (802.11ac-HT20, ch52, 1 GHz-3 GHz)

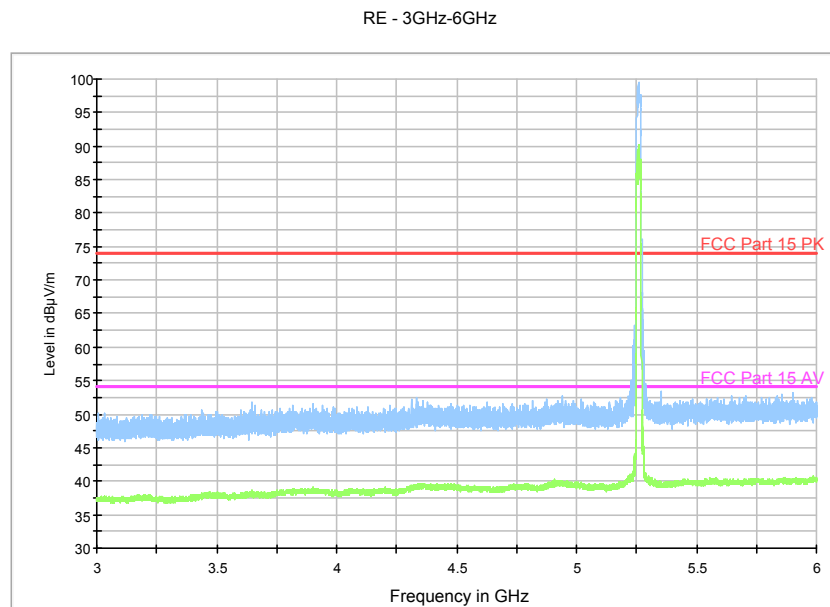

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 112 Radiated Spurious Emission (802.11ac-HT20, ch52, 3 GHz-6 GHz)

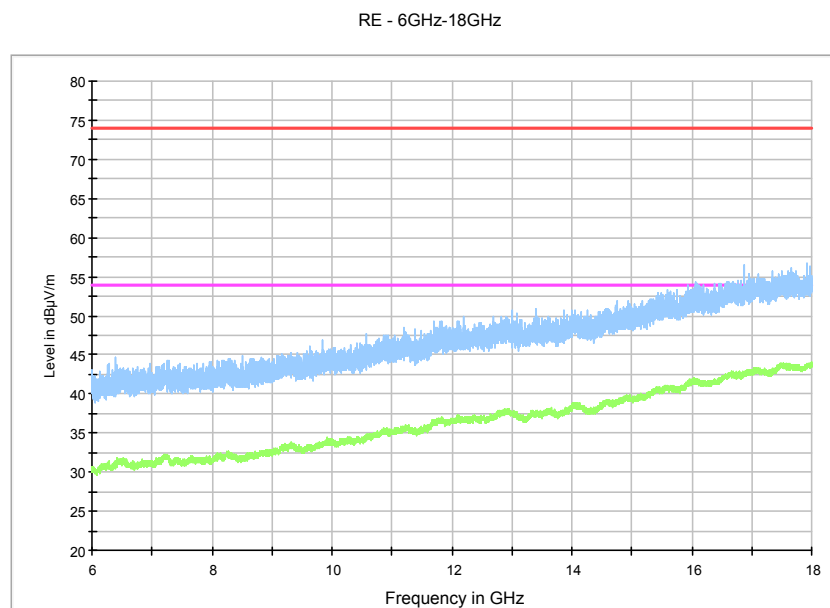


Fig. 113 Radiated Spurious Emission (802.11ac-HT20, ch52, 6 GHz-18GHz)

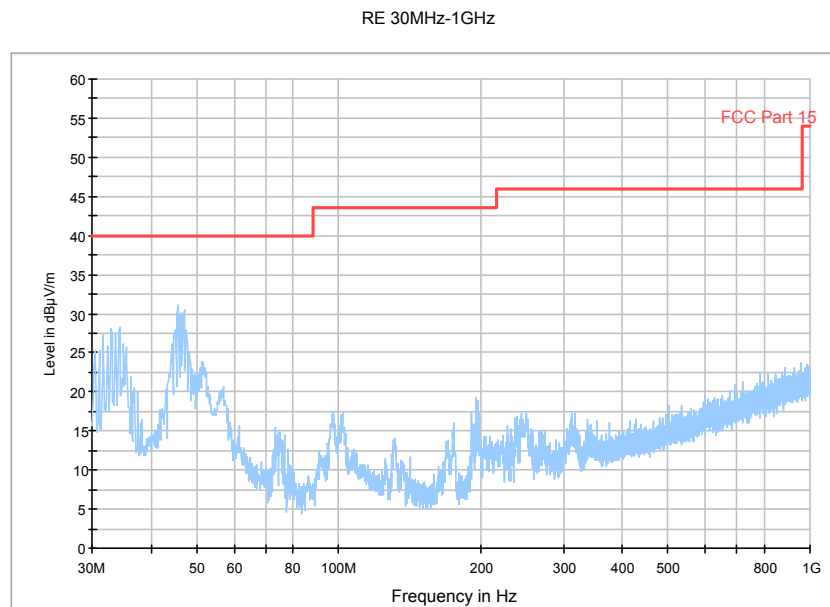


Fig. 114 Radiated Spurious Emission (802.11ac-HT20, ch56, 30 MHz-1 GHz)


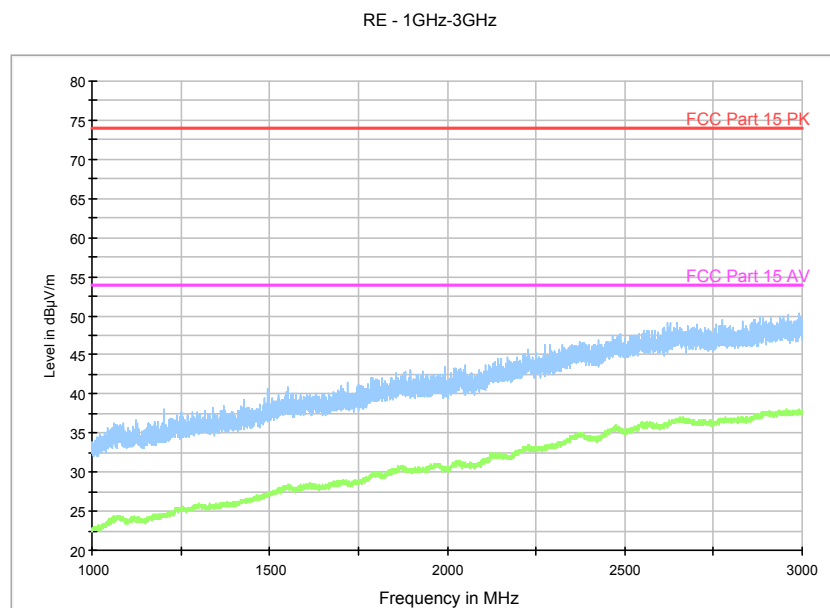


Fig. 115 Radiated Spurious Emission (802.11ac-HT20, ch56, 1 GHz-3 GHz)

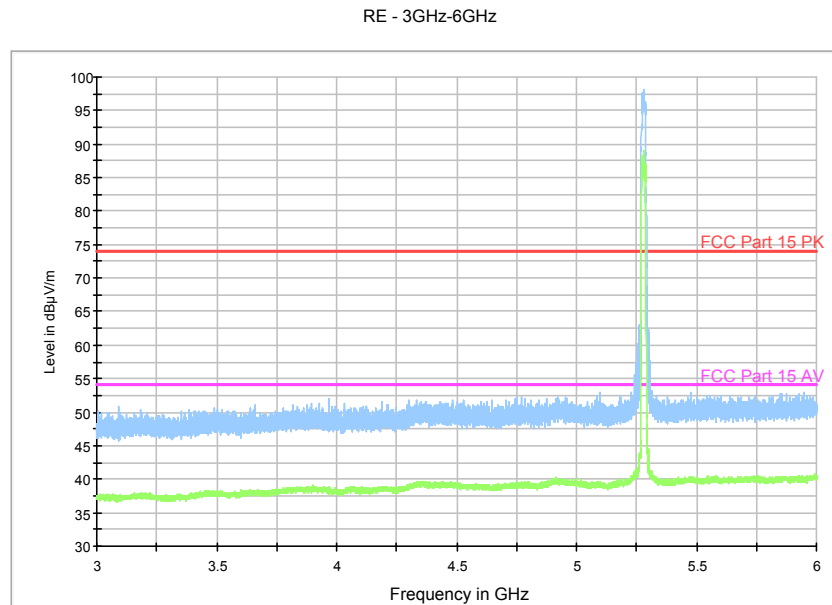

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 116 Radiated Spurious Emission (802.11ac-HT20, ch56, 3 GHz-6 GHz)

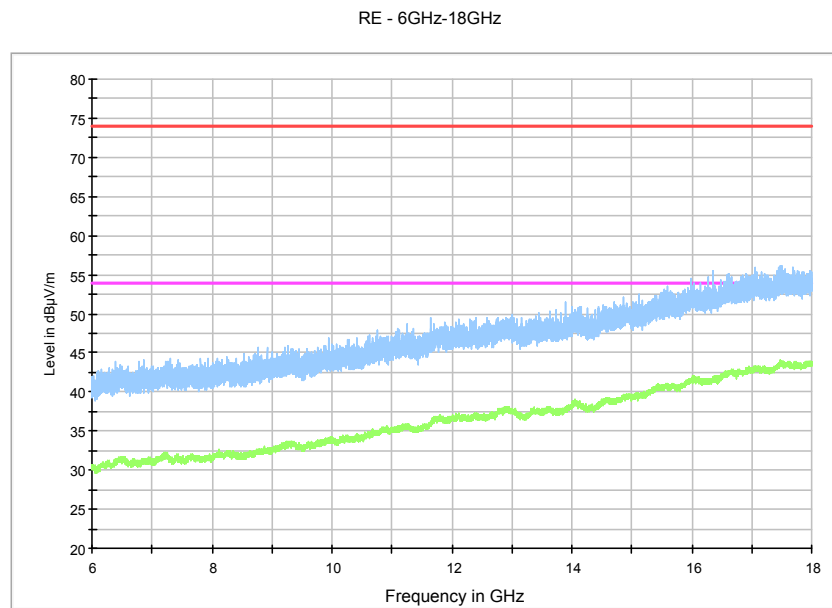


Fig. 117 Radiated Spurious Emission (802.11ac-HT20, ch56, 6 GHz-18 GHz)

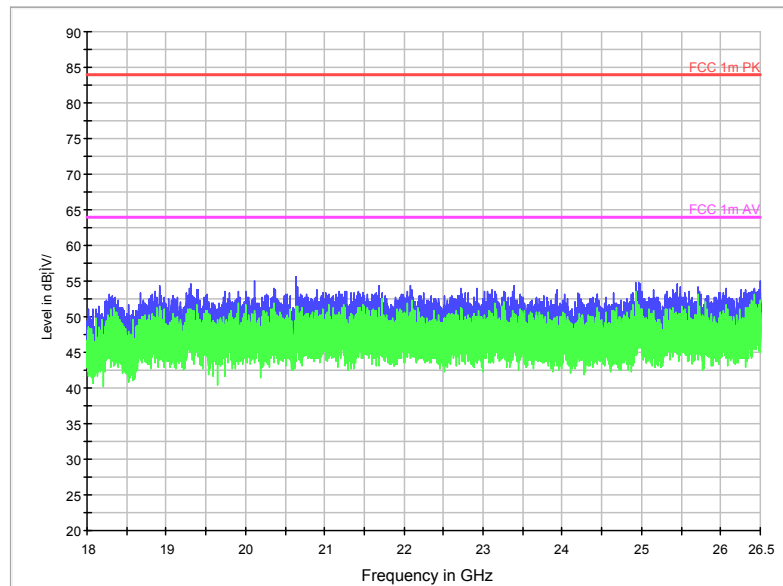


Fig. 118 Radiated Spurious Emission (802.11ac-HT20, ch56, 18 GHz-26.5 GHz)

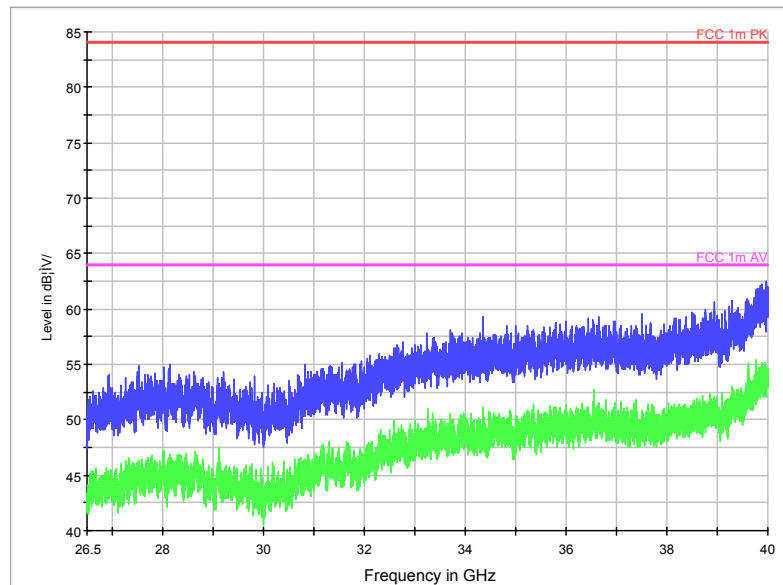


Fig. 119 Radiated Spurious Emission (802.11ac-HT20, ch56, 26.5 GHz-40 GHz)


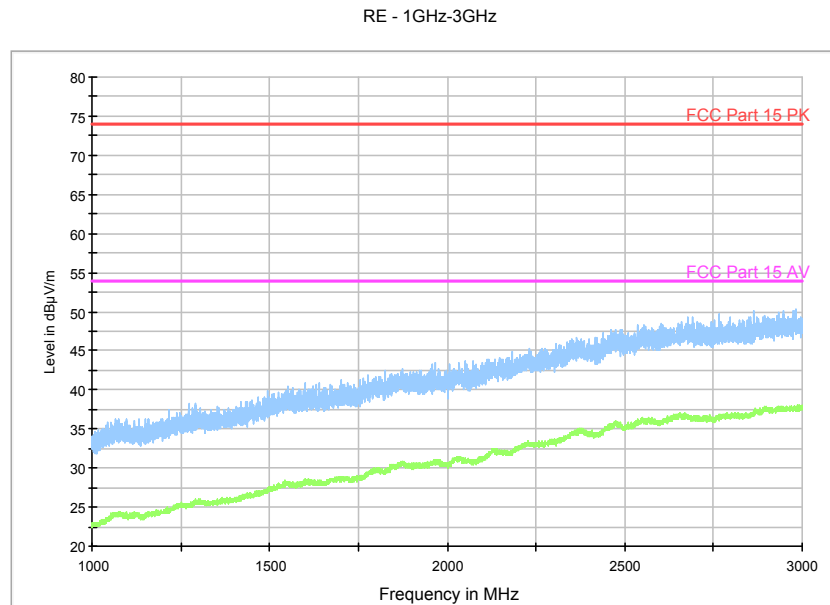


Fig. 120 Radiated Spurious Emission (802.11ac-HT20, ch64, 1 GHz-3GHz)

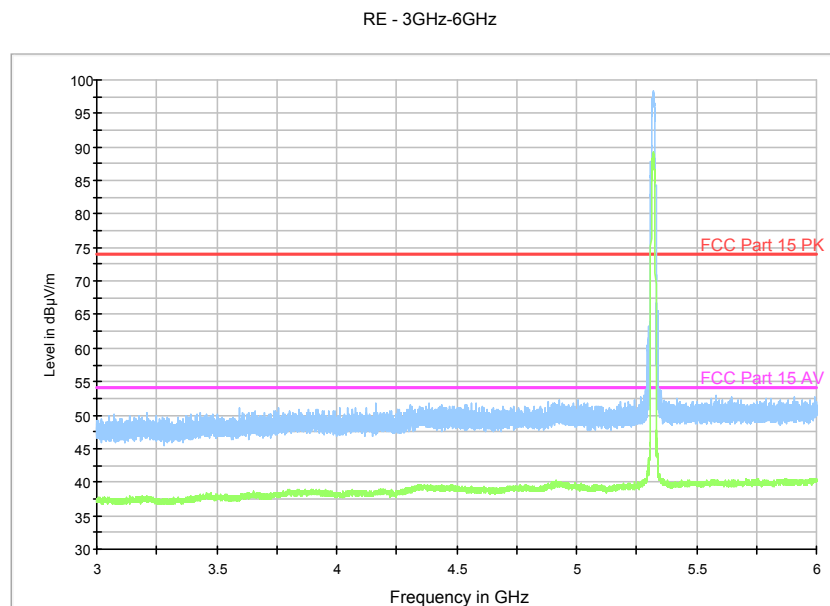

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 121 Radiated Spurious Emission (802.11ac-HT20, ch64, 3 GHz-6GHz)

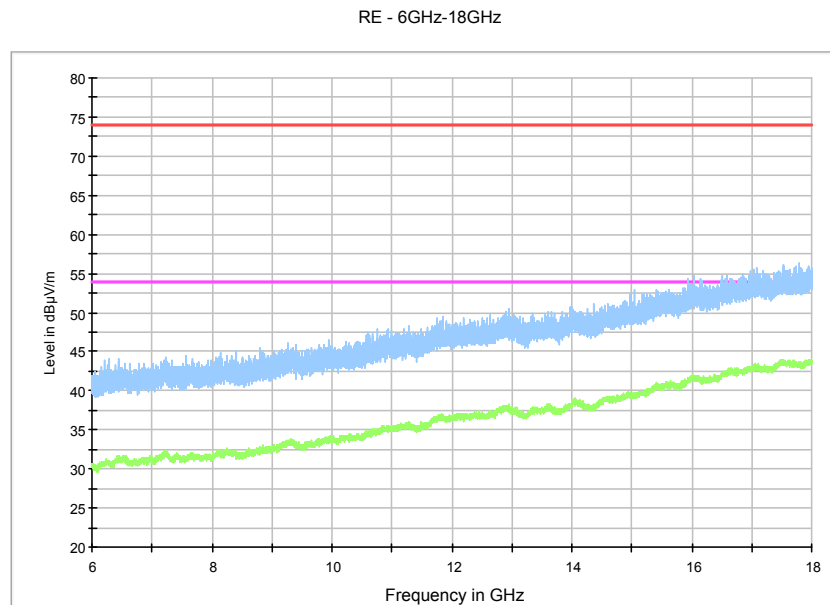


Fig. 122 Radiated Spurious Emission (802.11ac-HT20, ch64, 6 GHz-18 GHz)

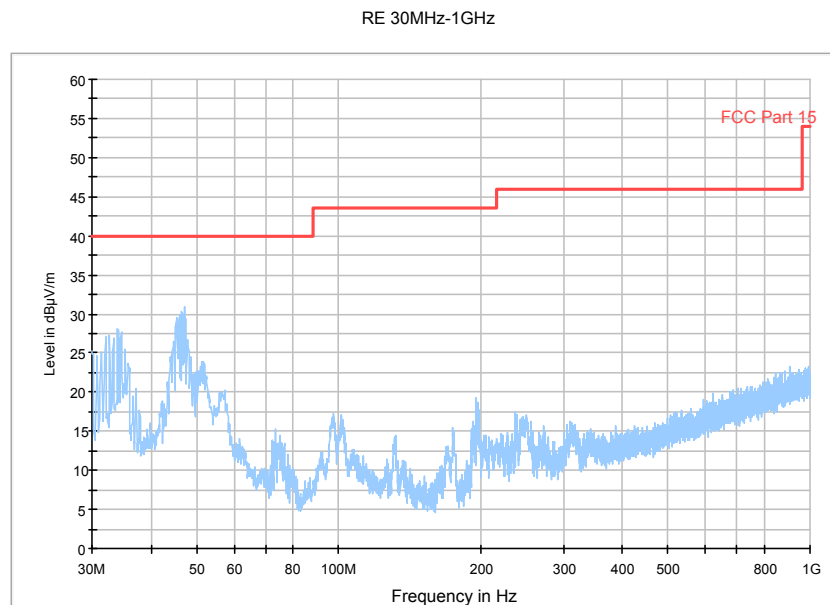


Fig. 123 Radiated Spurious Emission (802.11ac-HT40, ch52, 30 MHz-1 GHz)


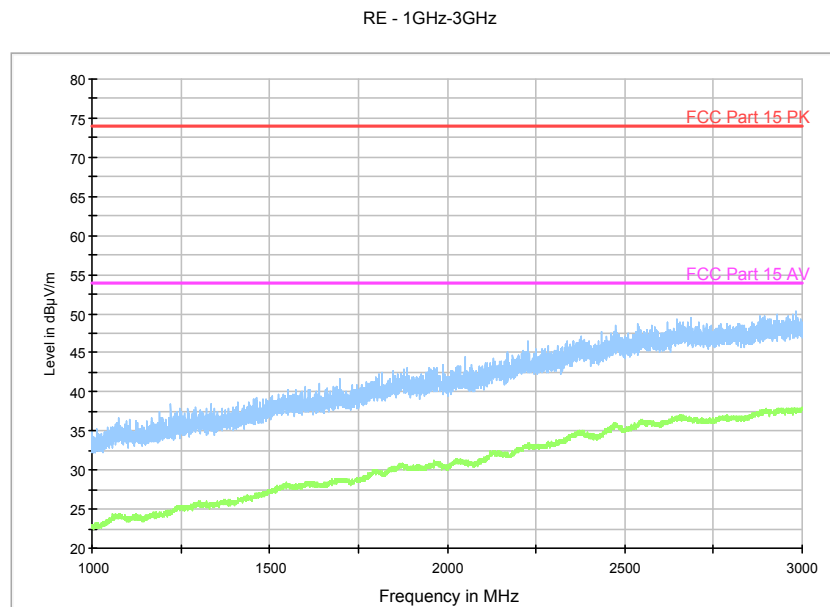


Fig. 124 Radiated Spurious Emission (802.11ac-HT40, ch52, 1 GHz-3 GHz)

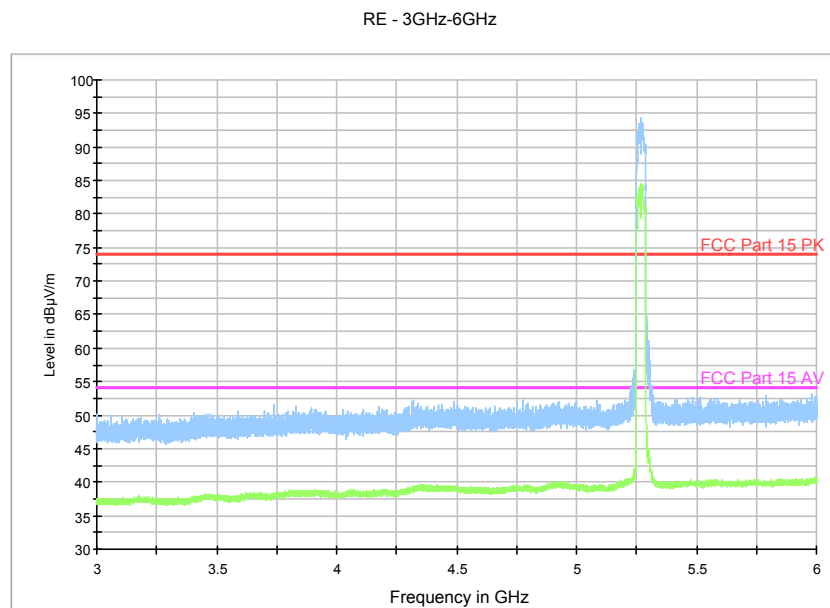

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig. 125 Radiated Spurious Emission (802.11ac-HT40, ch52, 3 GHz-6 GHz)

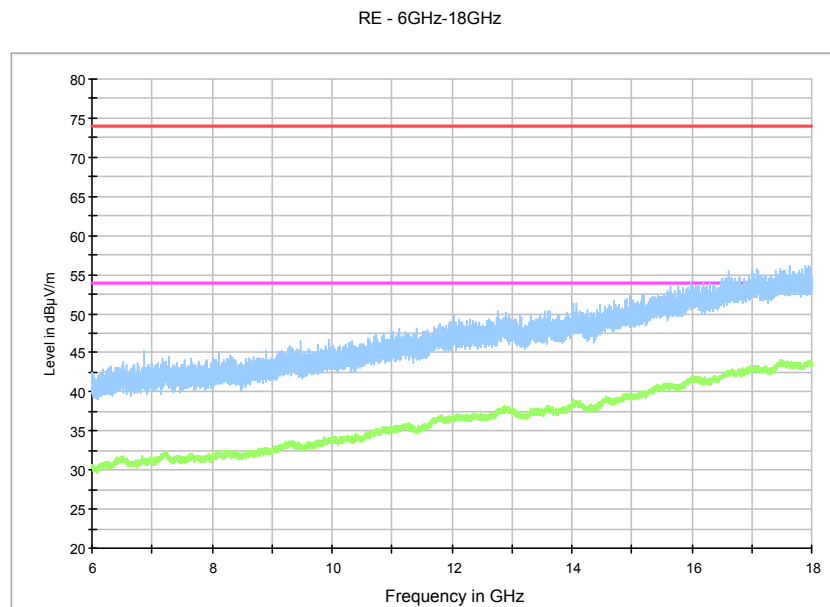


Fig. 126 Radiated Spurious Emission (802.11ac-HT40, ch52, 6 GHz-18 GHz)

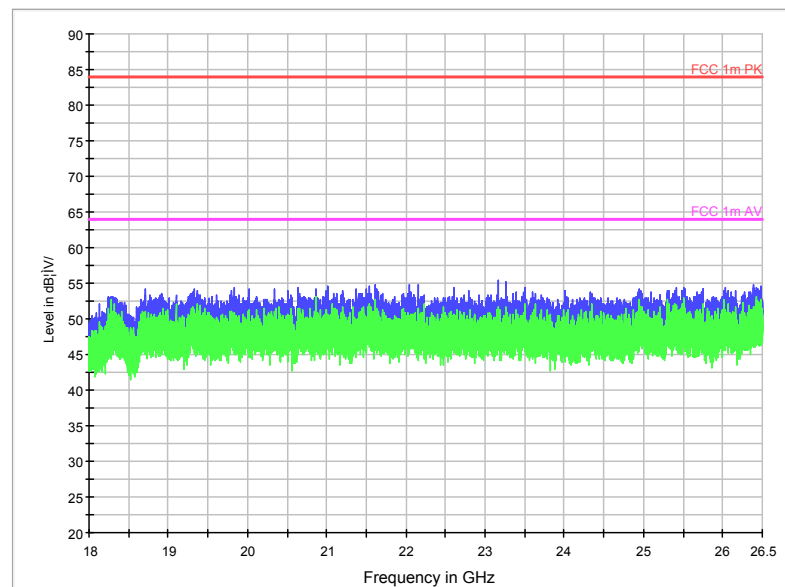


Fig. 127 Radiated Spurious Emission (802.11ac-HT40, ch52, 18 GHz-26.5 GHz)

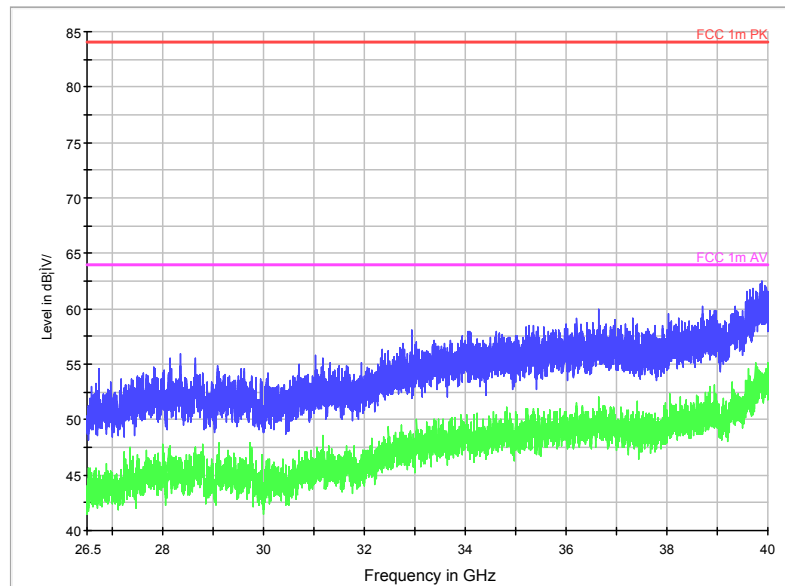


Fig. 128 Radiated Spurious Emission (802.11ac-HT40, ch52, 26.5 GHz-40 GHz)

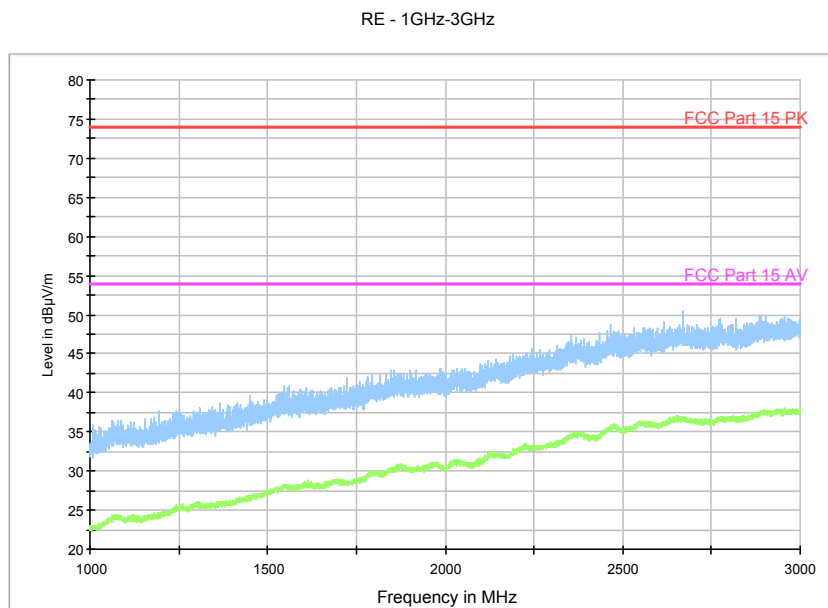


Fig. 129 Radiated Spurious Emission (802.11ac-HT40, ch60, 1 GHz-3 GHz)