



RADIO TEST REPORT

FCC ID : QXO-AP4000
Equipment : Access Point
Brand Name : Extreme Networks
Model Name : AP4000
Applicant : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina
United States 27560
Manufacturer : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina
United States 27560
Standard : 47 CFR FCC Part 15.407

The product was received on Nov. 28, 2025, and testing was started from Nov. 28, 2025 and completed on Dec. 02, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	11
1.3 Testing Location Information	11
1.4 Measurement Uncertainty	11
2 Test Configuration of EUT.....	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration	15
2.3 EUT Operation during Test	17
2.4 Accessories	17
2.5 Support Equipment.....	17
2.6 Test Setup Diagram	18
3 Transmitter Test Result	19
3.1 Emission Bandwidth	19
3.2 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	21
3.3 Peak Power Spectral Density (E.I.R.P.)	24
3.4 Unwanted Emissions.....	27
4 Test Equipment and Calibration Data	31
Appendix A. Test Results of Emission Bandwidth	
Appendix B. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix C. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix D. Test Results of Unwanted Emissions	
Appendix E. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Emission Bandwidth	PASS	-
3.2	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
3.3	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.4	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.

Reviewed by: Sam Chen**Report Producer: Sandy Chuang**



1 General Description

1.1 Information

1.1.1 RF General Information

For Indoor Access Point

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 7125	ax (HEW20)	5955 ~ 7095	1 ~ 229 [58]
5925 ~ 7125	ax (HEW40)	5965 ~ 7085	3 ~ 227 [29]
5925 ~ 7125	ax (HEW80)	5985 ~ 7025	7 ~ 215 [14]
5925 ~ 7125	ax (HEW160)	6025 ~ 6985	15 ~ 207 [7]

For Scanning radio 3

Band	Mode	BWch (MHz)	Nant
UNII 5~8	802.11ax HEW20	20	1, 2
UNII 5~8	802.11ax HEW20-BF	20	2
UNII 5~8	802.11ax HEW40	40	1, 2
UNII 5~8	802.11ax HEW40-BF	40	2
UNII 5~8	802.11ax HEW80	80	1, 2
UNII 5~8	802.11ax HEW80-BF	80	2
UNII 5~8	802.11ax HEW160	160	1, 2
UNII 5~8	802.11ax HEW160-BF	160	2

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- BWch is the nominal channel bandwidth.
- The channel defined in the IEEE Standard P802.11ax™/D6.1.

**For Standard Power Access Point**

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 6425	ax (HEW20)	5955-6415	1-93 [25]
6525 ~ 6875		6535-6855	117-181 [17]
5925 ~ 6425	ax (HEW40)	5965-6405	3-91 [12]
6525 ~ 6875		6565-6845	123-179 [8]
5925 ~ 6425	ax (HEW80)	5985-6385	7-87 [6]
6525 ~ 6875		6625-6785	135-167 [3]
5925 ~ 6425	ax (HEW160)	6025-6345	15-79 [3]
6525 ~ 6875		6665	143 [1]

For Radio 3

Band	Mode	BWch	Nant
UNII 5	802.11ax HEW20	20	1, 2
UNII 5	802.11ax HEW20-BF	20	2
UNII 5	802.11ax HEW40	40	1, 2
UNII 5	802.11ax HEW40-BF	40	2
UNII 5	802.11ax HEW80	80	1, 2
UNII 5	802.11ax HEW80-BF	80	2
UNII 5	802.11ax HEW160	160	1, 2
UNII 5	802.11ax HEW160-BF	160	2
UNII 7	802.11ax HEW20	20	1, 2
UNII 7	802.11ax HEW20-BF	20	2
UNII 7	802.11ax HEW40	40	1, 2
UNII 7	802.11ax HEW40-BF	40	2
UNII 7	802.11ax HEW80	80	1, 2
UNII 7	802.11ax HEW80-BF	80	2
UNII 7	802.11ax HEW160	160	1, 2
UNII 7	802.11ax HEW160-BF	160	2

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- BWch is the nominal channel bandwidth.
- The channel defined in the IEEE Standard P802.11ax™/D6.1.



1.1.2 Antenna Information

Ant.	Port				Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz (Radio 1) / 5GHz (Radio 2)	WLAN 2.4GHz+ 5GHz (Radio 3)	WLAN 6GHz (Radio 3)	Bluetooth / IEEE802.15.4 (Radio 4)				
1	2	-	-	-	N/A	PIFA	I-PEX	Note 1
2	1	-	-	-	N/A	PIFA	I-PEX	
3	-	2	-	-	N/A	PIFA	I-PEX	
4	-	1	-	-	N/A	PIFA	I-PEX	
5	-	-	1	-	N/A	PIFA	I-PEX	
6	-	-	2	-	N/A	PIFA	I-PEX	
7	-	-	-	1	N/A	PIFA	I-PEX	

Note 1:

Ant.	Antenna Gain (dBi)														Bluetooth / IEEE802.15.4 (Radio 4)
	WLAN 2.4GHz (Radio 1)	WLAN 2.4GHz (Radio 3)	WLAN 5GHz (Radio 2)				WLAN 5GHz (Radio 3)				WLAN 6GHz (Radio 3)				
			UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8	
1	4	-	5.14	5.14	4.23	4.43	-	-	-	-	-	-	-	-	-
2	3.61	-	4.53	4.53	3.49	3.08	-	-	-	-	-	-	-	-	-
3	-	5.20	-	-	-	-	5.91	5.91	5.39	5.80	-	-	-	-	-
4	-	5.32	-	-	-	-	5.11	5.11	5.11	5.62	-	-	-	-	-
5	-	-	-	-	-	-	-	-	-	-	4.34	4.56	4.56	4.50	-
6	-	-	-	-	-	-	-	-	-	-	4.88	5.25	5.25	5.05	-
7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.26

Ant.	Directional Gain (dBi)									
	WLAN 2.4GHz (Radio 1)		WLAN 5GHz (Radio 2)							
			UNII 1		UNII 2A		UNII 2C		UNII 3	
	2T1S	2T2S	2T1S	2T2S	2T1S	2T2S	2T1S	2T2S	2T1S	2T2S
1	4.7	1.87	3.77	1.20	3.36	1.37	3.85	1.42	2.96	1.05
2										

Note 2: The EUT has seven antennas.

Note 3: The above information was declared by manufacturer.

Note 4: Radio 1, 2: Maximum Directional Gain following KDB662911 D03.

Note 5: Radio 3: Maximum Directional Gain following KDB662911 D01.

For Radio 1

For 2.4GHz:

For IEEE 802.11b/g/n/VHT/ax mode (1TX, 2TX/2RX):

For 1TX

The EUT supports the antenna with TX diversity functions.

Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.

The Port 1 generated the worst case, so it was selected to test and record in the report.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**For Radio 2****For 5GHz UNII 1~3:****For IEEE 802.11a/n/ac/ax mode (1TX, 2TX/2RX):****For 1TX**

The EUT supports the antenna with TX diversity functions.

Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.

The Port 1 generated the worst case, so it was selected to test and record in the report.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For scanning radio 3**For 2.4GHz:****For IEEE 802.11b/g/n/VHT/ax mode (2TX/2RX):****For 5GHz UNII 1~3:****For IEEE 802.11a/n/ac/ax mode (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 6E UNII 5~8 (1TX, 2TX/2RX):**For 1TX**

The EUT supports the antenna with TX diversity functions.

Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.

The Port 2 generated the worst case, so it was selected to test and record in the report.

For 2TX/2RX

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 4**Bluetooth / IEEE802.15.4 (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11ax HEW20_Nss 1,(M0)	0.98	0.09	1.497m	10Hz (DC $\geq$ 0.98)
802.11ax HEW40_Nss 1,(M0)	0.965	0.15	778.125u	2k
802.11ax HEW80_Nss 1,(M0)	0.932	0.31	406.25u	3k
802.11ax HEW160_Nss 1,(M0)	0.894	0.49	237.5u	5k
802.11ax HEW20_Nss 2,(M0)	0.965	0.15	784.375u	2k
802.11ax HEW40_Nss 2,(M0)	0.934	0.3	425u	3k
802.11ax HEW80_Nss 2,(M0)	0.896	0.48	243.75u	5k
802.11ax HEW160_Nss 2,(M0)	0.841	0.75	159.375u	10k
802.11ax HEW20-BF_Nss 1,(M0)	0.98	0.09	1.497m	10Hz (DC $\geq$ 0.98)
802.11ax HEW40-BF_Nss 1,(M0)	0.965	0.15	778.125u	2k
802.11ax HEW80-BF_Nss 1,(M0)	0.932	0.31	406.25u	3k
802.11ax HEW160-BF_Nss 1,(M0)	0.894	0.49	237.5u	5k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE	
Beamforming Function	☒ With beamforming	☐ Without beamforming
	The product has beamforming function for n/VHT/ax in 2.4GHz of radio 1, n/ac/ax in 5GHz UNII 1~UNII 3 of radio 2, and ax in 6GHz UNII 5~UNII 8 of radio 3.	
Device Type	☒ Indoor Access Point	☐ Subordinate
	☐ Indoor Client	☒ Standard Power Access Point
	☐ Dual Client	☐ Standard Client
	☐ Fixed Client	☐ Very Low Power
Condition of EUT	☒ Indoor	☐ Outdoor
Channel Puncturing Function	☐ Supported	
	☒ Unsupported	
Note: The EUT doesn't support puncturing for CBP.		
Support RU	☒ Full RU	☐ Partial RU
Test Software Version	For non-beamforming mode: accessMtool [version 3.2.1.0] For beamforming mode: DOS [ver 6.1.7601]	

Note: The above information was declared by manufacturer.

**1.1.5 Table for Radio function**

Radio	WLAN 2.4GHz	WLAN 5GHz UNII 1~3	Scanning radio (WLAN 2.4GHz / 5GHz UNII 1~3 / 6E (UNII 5~8))	Bluetooth / IEEE802.15.4
1	V (AP, Bridge, Mesh)	-	-	-
2	-	V AP for UNII 1~3 Bridge, Mesh for UNII 1, 3	-	-
3	-	-	V (AP)	-
4	-	-	-	V

Note: The above information was declared by manufacturer.

1.1.6 Table for EUT support function

Function
AP
Bridge
Mesh

Note: The above information was declared by manufacturer.

1.1.7 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR151220-03AC

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding the Standard Power Access Point for UNII-5, 7.	1. Emission Bandwidth 2. Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) 3. Peak Power Spectral Density (E.I.R.P.) 4. Unwanted Emissions above 1GHz
2. Changing test standard version to "ANSI C63.10-2020" from "ANSI C63.10-2013". 3. Updating the applicant and manufacturer address to "2121 RDU Center Drive Morrisville North Carolina United States 27560" from "6480 Via Del Oro, San Jose, CA 95119"	After evaluation, it does not need to re-test.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	Mason Chen	23.2~24.9 / 61~64	Dec. 01, 2025~ Dec. 02, 2025
Radiated	03CH06-CB	Jimmy Huang	23.8~24.1 / 68~69	Nov. 28, 2025~ Nov. 29, 2025

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	3.8 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	3.5 dB	Confidence levels of 95%
Bandwidth Measurement	1.6 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11ax HEW20_Nss1,(MCS0)_1TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11ax HEW40_Nss1,(MCS0)_1TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11ax HEW80_Nss1,(MCS0)_1TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11ax HEW160_Nss1,(MCS0)_1TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11ax HEW20_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11ax HEW40_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11ax HEW80_Nss1,(MCS0)_2TX
5985MHz



6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11ax HEW160_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11ax HEW20_Nss2,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11ax HEW40_Nss2,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11ax HEW80_Nss2,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11ax HEW160_Nss2,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11ax HEW20-BF_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11ax HEW40-BF_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz



6845MHz
802.11ax HEW80-BF_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11ax HEW160-BF_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6665MHz



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth
Test Condition	Conducted measurement at transmit chains
1	Scanning radio 3_1T1S / 2T2S

The Worst Case Mode for Following Conformance Tests	
Tests Item	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)
Test Condition	Conducted measurement at transmit chains
1	Scanning radio 3_1T1S / 2T1S (Beamforming) / 2T2S

The Worst Case Mode for Following Conformance Tests	
Tests Item	Peak Power Spectral Density (E.I.R.P.)
Test Condition	Conducted measurement at transmit chains
1	Scanning radio 3_1T1S / 2T2S

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode > 1GHz	CTX
After evaluating, and the worst case axis was found as below. So the measurement will follow this same test configuration.	
1	Scanning radio 3_1T1S_EUT in Z axis Scanning radio 3_2T2S_EUT in Y axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains
1	Scanning radio 3_1T1S / 2T2S



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_2.4GHz + Radio 4_Bluetooth
2	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_2.4GHz + Radio 4_802.15.4
3	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_5GHz + Radio 4_Bluetooth
4	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_5GHz + Radio 4_802.15.4
5	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_6E (Indoor Access Point) + Radio 4_Bluetooth
6	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_6E (Indoor Access Point) + Radio 4_802.15.4
7	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_6E (Standard Power Access Point) + Radio 4_Bluetooth
8	Radio 1_2.4GHz + Radio 2_5GHz + Scanning radio 3_6E (Standard Power Access Point) + Radio 4_802.15.4
Refer to Sporton Test Report No.: FA151220-34 for Co-location RF Exposure Evaluation.	

Note 1: The test modes listed in the table below are declared by the manufacturer.

Test Item	Test Mode			
	802.11ax HEW20/40/80/160			
	1T1S	CDD 2T1S	TXBF 2T1S	CDD 2T2S
Maximum Equivalent Isotropically Radiated Power	V	V	V	V
Emission Bandwidth	V	Note 2	X	V
Peak Power Spectral Density	V	Note 2	X	V
Radiated Emission	V	Note 2	X	V
Band Edge Emission	V	Note 2	X	V
Emission MASK	V	Note 2	X	V

Note 2: 802.11ax HEW20/40 2T1S CDD mode was covered by 802.11ax HEW20/40 2T2S, due to $2T1S = \min(2T2S, (2T2S - (10 \cdot \log(2/1) - 2T2S \text{ (worst case of PSD/BE/Harmonic) MARGIN})))$.

Note 3: The PoE is for measurement only, would not be marketed.

PoE information as below:

Power	Brand	Model
PoE	Microsemi	PD-9001-10GC/AC



2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

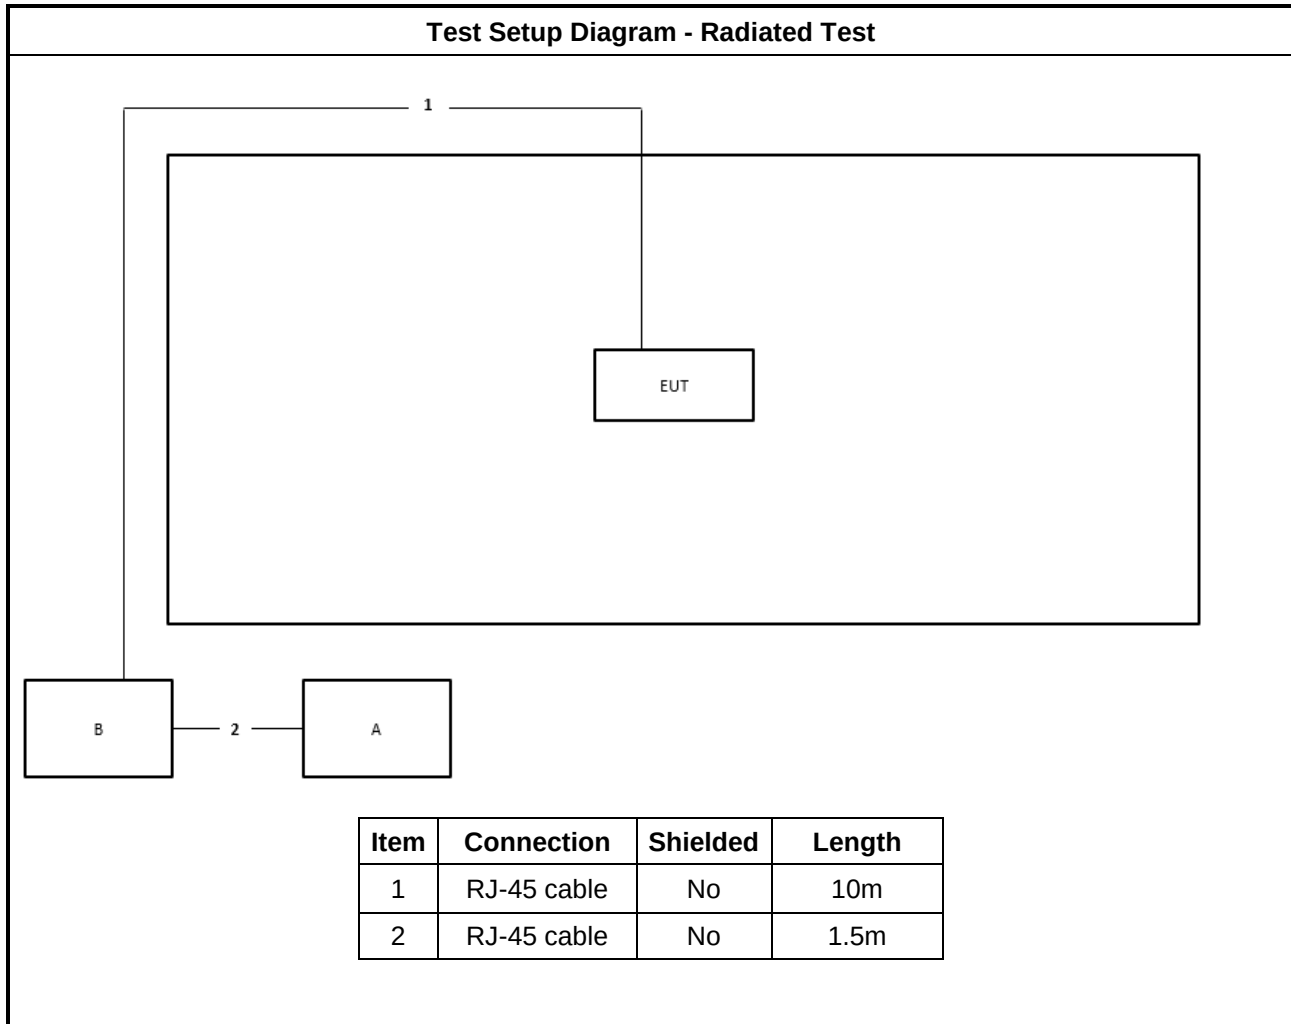
2.4 Accessories

Accessories
Cradle*1

2.5 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE	Microsemi	PD-9001-10GC/AC	N/A

2.6 Test Setup Diagram



3 Transmitter Test Result

3.1 Emission Bandwidth

3.1.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☒	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
☐	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☐	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.

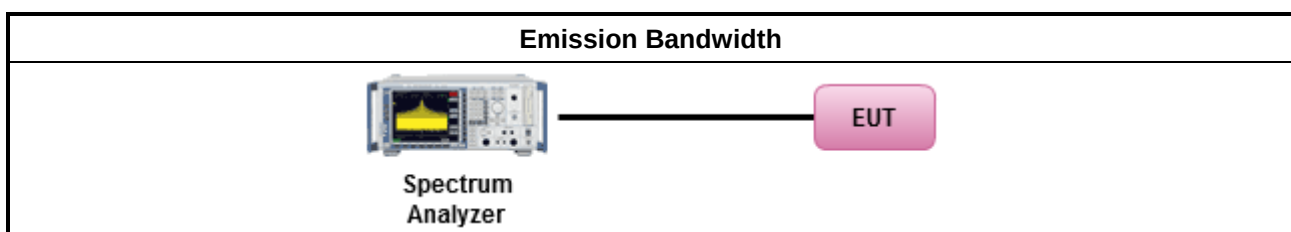
3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.1.4 Test Setup





3.1.5 Test Result of Emission Bandwidth

Refer as Appendix A

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.2 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.2.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.
☐ For the 5.925 ~ 6.875 GHz band:	



- | |
|--|
| <ul style="list-style-type: none">For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). |
| <ul style="list-style-type: none">For standard client devices < 30 dBm. |

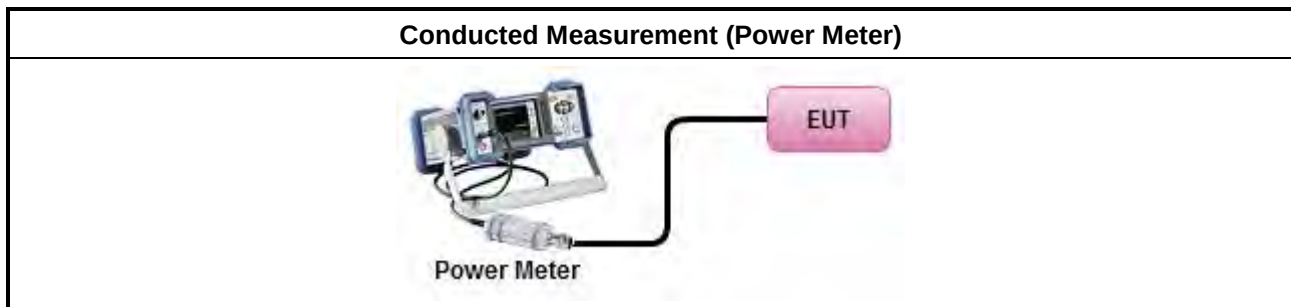
3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.	
	Average over on/off periods with duty factor
	☐ Refer as FCC KDB 987594 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
	☐ Refer as FCC KDB 987594 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
	☒ Refer as FCC KDB 987594 D02, clause E Method PM-G (using an RF average power meter).
☒ For conducted measurement.	
	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐ For radiated measurement.	
	Refer as FCC KDB 987594 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.2.4 Test Setup



3.2.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix B



3.3 Peak Power Spectral Density (E.I.R.P.)

3.3.1 Peak Power Spectral Density (E.I.R.P.) Limit

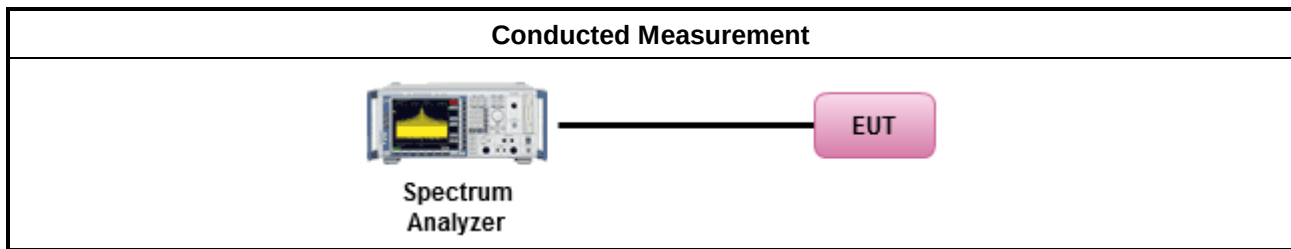
Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.



3.3.2 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐	For radiated measurement.
- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.3.3 Test Setup



3.3.4 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix C



3.4 Unwanted Emissions

3.4.1 Transmitter Unwanted Emissions Limit

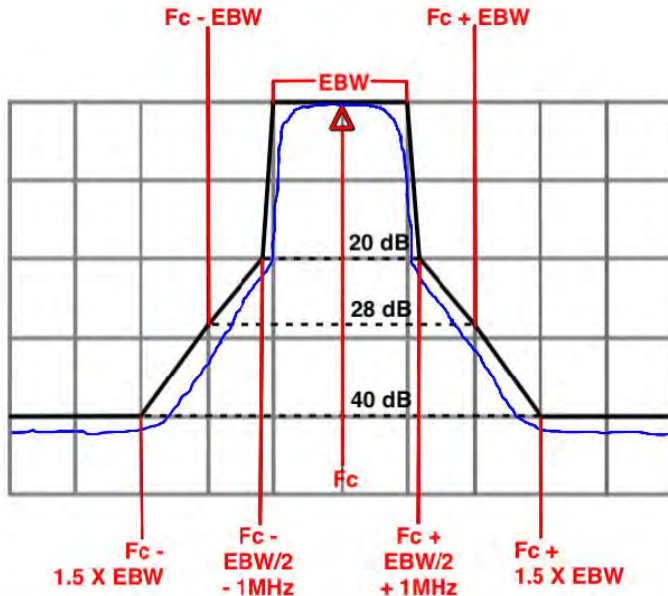
Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

Frequency	Emission MASK Limit
5.925 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 



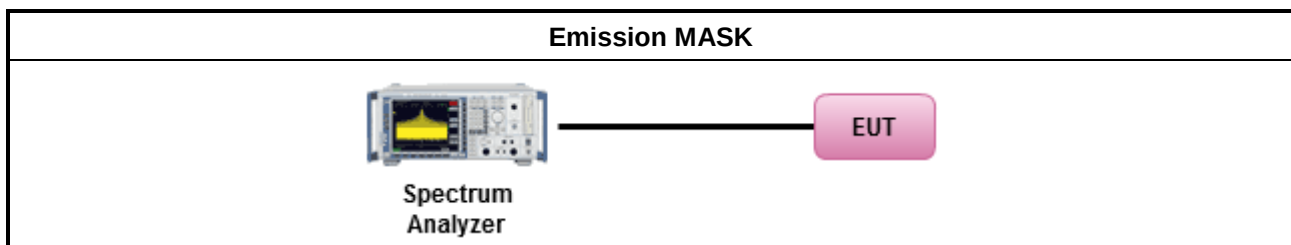
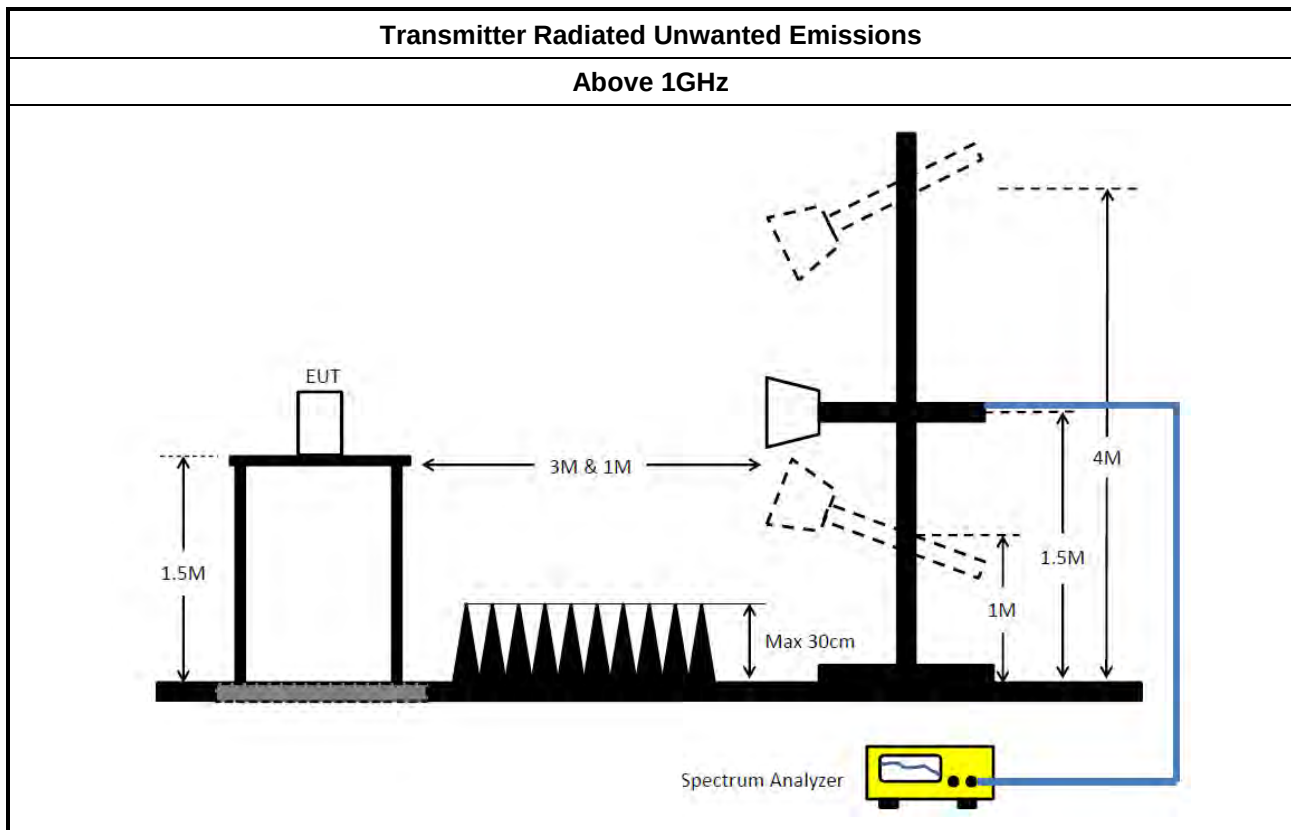
3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.4.4 Test Setup



3.4.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamplifier factor (PA)(if applicable)
= Level

3.4.6 Test Result of Transmitter Unwanted Emissions

Refer as Appendix D



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170586	15GHz ~ 40GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 11, 2025	Mar. 10, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH1840	20230109-3	18~40GHz	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15407 _NII	V5.11. 27	5.15GHz-7.115 GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH06-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Sep. 03, 2025	Sep. 02, 2026	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GH z	Oct. 28, 2025	Oct. 27, 2026	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GH z	Oct. 28, 2025	Oct. 27, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)



RADIO TEST REPORT

Report No. : FR151220-34

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Switch	SPTCB	SP-SWI	SWI-02	1-18 GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115 GHz	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	69.3M	41.079M	41M1D1D	41.525M	19.815M
802.11ax HEW20_Nss2,(MCS0)_2TX	87.67M	41.179M	41M2D1D	39.105M	19.24M
802.11ax HEW40_Nss1,(MCS0)_1TX	126.61M	79.96M	80M0D1D	56.87M	37.681M
802.11ax HEW40_Nss2,(MCS0)_2TX	138.38M	79.31M	79M3D1D	64.46M	37.731M
802.11ax HEW80_Nss1,(MCS0)_1TX	311.74M	165.617M	166MD1D	111.76M	77.361M
802.11ax HEW80_Nss2,(MCS0)_2TX	313.28M	165.917M	166MD1D	111.54M	77.261M
802.11ax HEW160_Nss1,(MCS0)_1TX	313.28M	159.32M	159MD1D	280.72M	156.522M
802.11ax HEW160_Nss2,(MCS0)_2TX	315.04M	159.12M	159MD1D	280.28M	156.122M
6.525-6.875GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	78.485M	40.53M	40M5D1D	41.085M	19.74M
802.11ax HEW20_Nss2,(MCS0)_2TX	76.56M	40.58M	40M6D1D	36.465M	19.59M
802.11ax HEW40_Nss1,(MCS0)_1TX	120.67M	74.813M	74M8D1D	102.3M	61.769M
802.11ax HEW40_Nss2,(MCS0)_2TX	120.12M	75.962M	76M0D1D	91.96M	53.323M
802.11ax HEW80_Nss1,(MCS0)_1TX	282.26M	159.12M	159MD1D	231.22M	147.126M
802.11ax HEW80_Nss2,(MCS0)_2TX	285.56M	159.82M	160MD1D	212.96M	138.531M
802.11ax HEW160_Nss1,(MCS0)_1TX	316.36M	162.719M	163MD1D	316.36M	162.719M
802.11ax HEW160_Nss2,(MCS0)_2TX	315.92M	164.918M	165MD1D	313.72M	160.12M

Max-N dB = Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

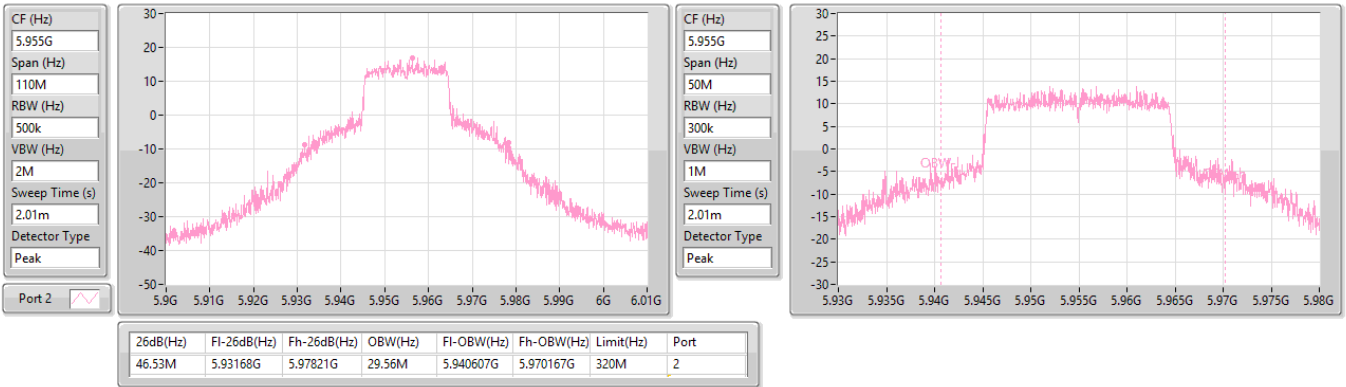
Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5955MHz	Pass	320M			46.53M	29.56M
6195MHz	Pass	320M			69.3M	41.079M
6415MHz	Pass	320M			41.525M	19.815M
6535MHz	Pass	320M			41.085M	19.74M
6695MHz	Pass	320M			78.485M	40.53M
6855MHz	Pass	320M			65.01M	39.105M
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5965MHz	Pass	320M			56.87M	37.681M
6205MHz	Pass	320M			126.61M	79.96M
6405MHz	Pass	320M			82.61M	38.631M
6565MHz	Pass	320M			104.06M	65.017M
6685MHz	Pass	320M			120.67M	74.813M
6845MHz	Pass	320M			102.3M	61.769M
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5985MHz	Pass	320M			111.76M	77.361M
6225MHz	Pass	320M			311.74M	165.617M
6385MHz	Pass	320M			173.58M	79.36M
6625MHz	Pass	320M			231.22M	147.126M
6705MHz	Pass	320M			247.06M	151.224M
6785MHz	Pass	320M			282.26M	159.12M
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-	-
6025MHz	Pass	320M			280.72M	156.522M
6185MHz	Pass	320M			313.28M	157.921M
6345MHz	Pass	320M			313.28M	159.32M
6665MHz	Pass	320M			316.36M	162.719M
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	Inf	49.28M	30.71M	48.015M	30.635M
6195MHz	Pass	Inf	87.67M	41.129M	76.835M	41.179M
6415MHz	Pass	320M	40.7M	19.24M	39.105M	19.615M
6535MHz	Pass	320M	42.46M	19.865M	36.465M	19.59M
6695MHz	Pass	Inf	61.105M	35.032M	76.56M	40.58M
6855MHz	Pass	Inf	66.99M	38.306M	64.79M	39.005M
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	71.17M	37.731M	64.46M	37.831M
6205MHz	Pass	Inf	116.71M	75.712M	138.38M	79.31M
6405MHz	Pass	320M	78.98M	38.431M	82.83M	38.531M
6565MHz	Pass	Inf	93.94M	63.768M	101.75M	65.117M
6685MHz	Pass	Inf	100.65M	66.317M	120.12M	75.962M
6845MHz	Pass	Inf	91.96M	53.323M	100.21M	60.47M
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320M	111.54M	77.261M	117.7M	77.361M
6225MHz	Pass	Inf	313.28M	164.618M	305.36M	165.917M
6385MHz	Pass	320M	167.64M	77.961M	175.78M	79.36M
6625MHz	Pass	Inf	212.96M	138.531M	222.2M	147.526M
6705MHz	Pass	Inf	215.38M	140.33M	234.74M	151.124M
6785MHz	Pass	Inf	253.44M	156.122M	285.56M	159.82M
802.11ax HEW160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	280.28M	156.122M	282.48M	156.722M
6185MHz	Pass	Inf	310.2M	157.921M	309.76M	159.12M
6345MHz	Pass	Inf	315.04M	157.121M	314.16M	158.321M
6665MHz	Pass	Inf	313.72M	160.12M	315.92M	164.918M

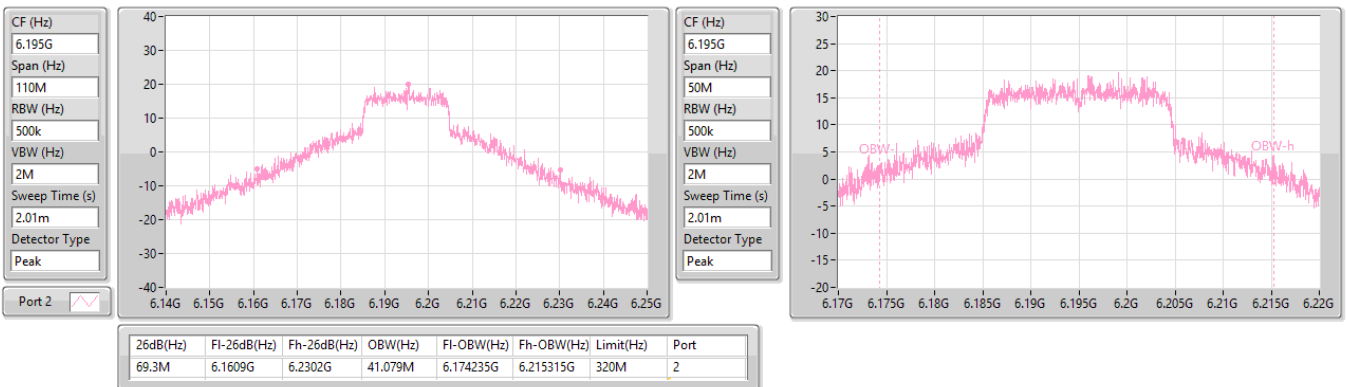
Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5955MHz

01/12/2025

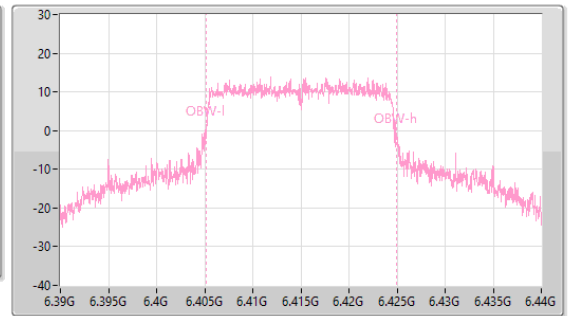
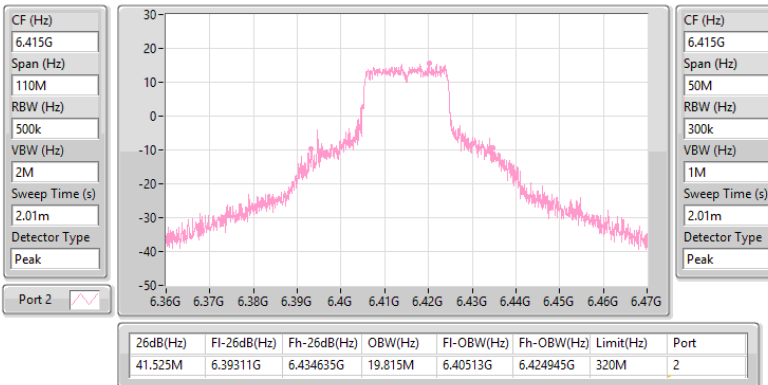

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
6195MHz

01/12/2025

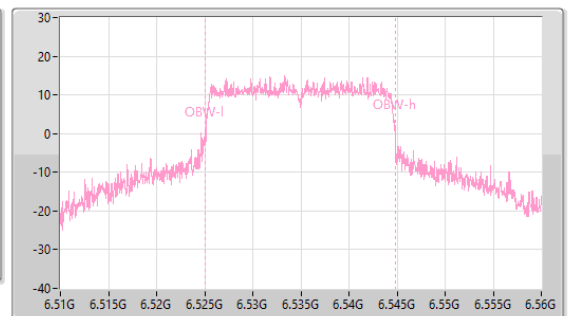
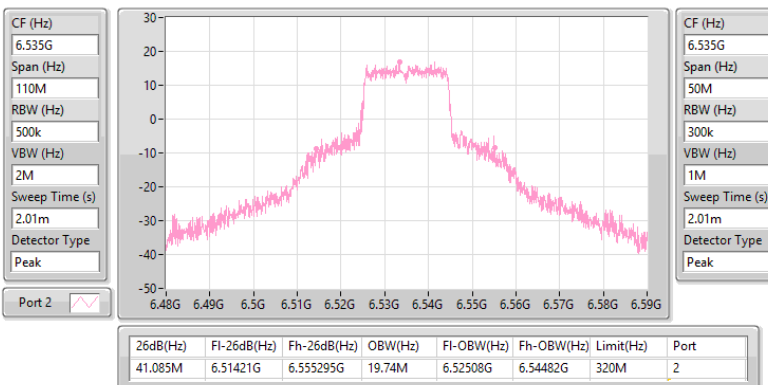


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
6415MHz

02/12/2025

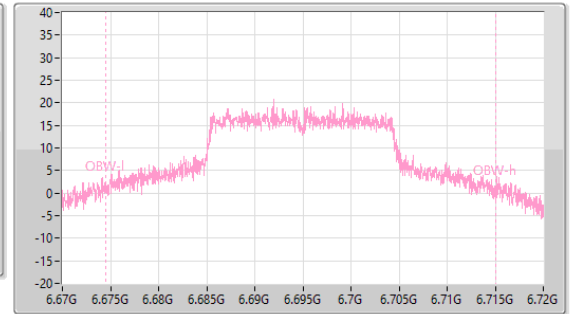
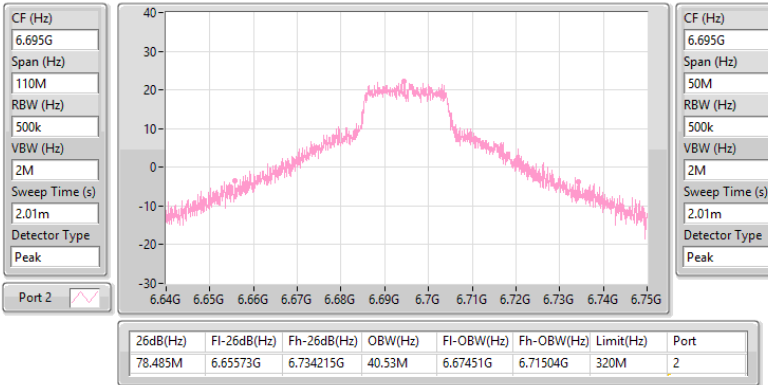

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
6535MHz

02/12/2025

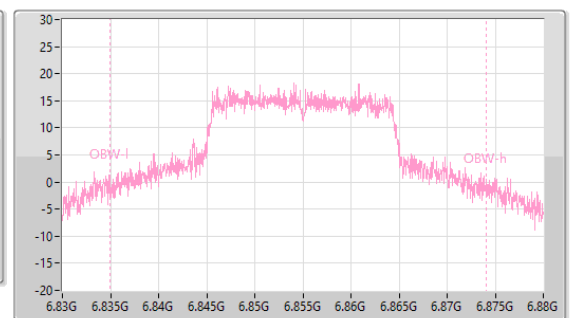
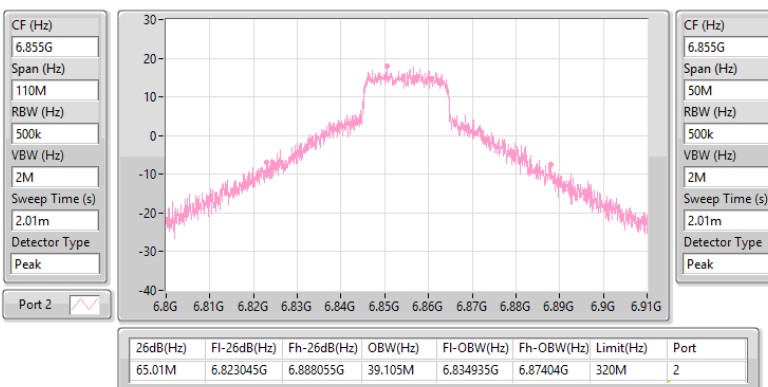


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
6695MHz

01/12/2025


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
6855MHz

01/12/2025

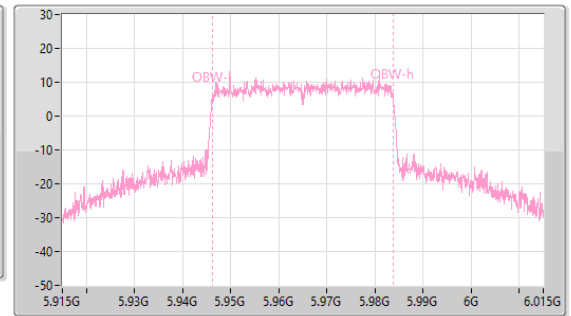
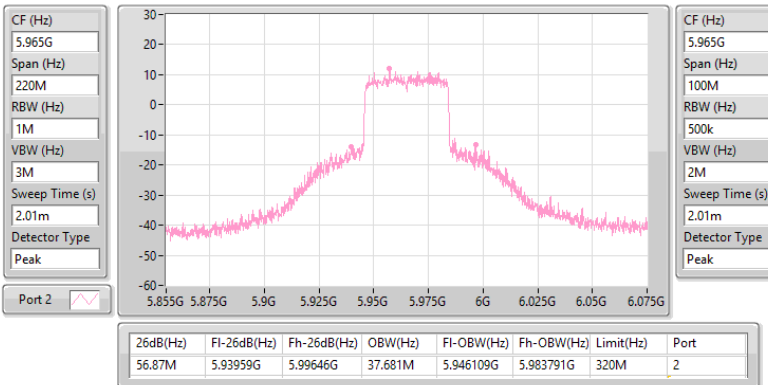


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

5965MHz

01/12/2025

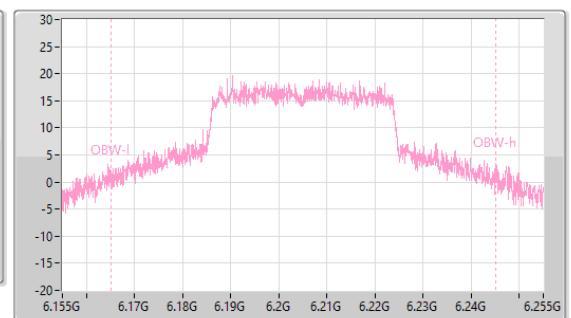
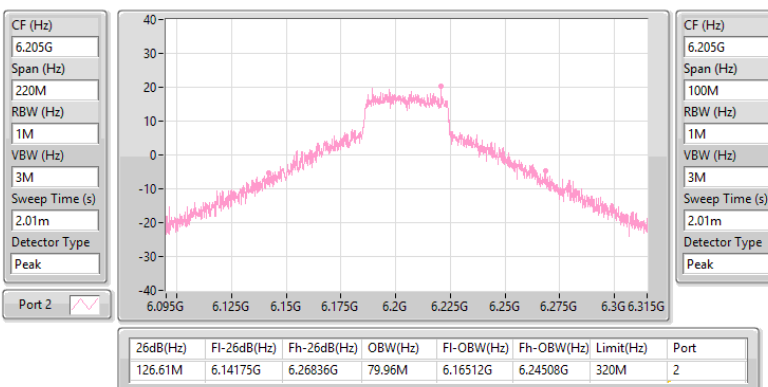


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

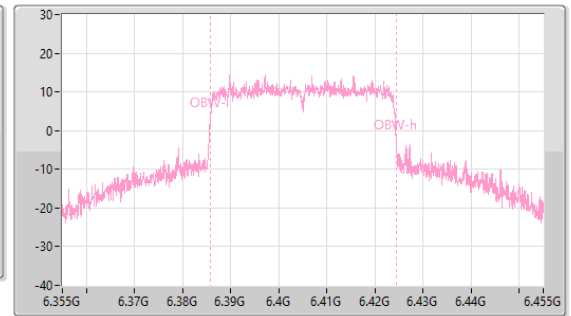
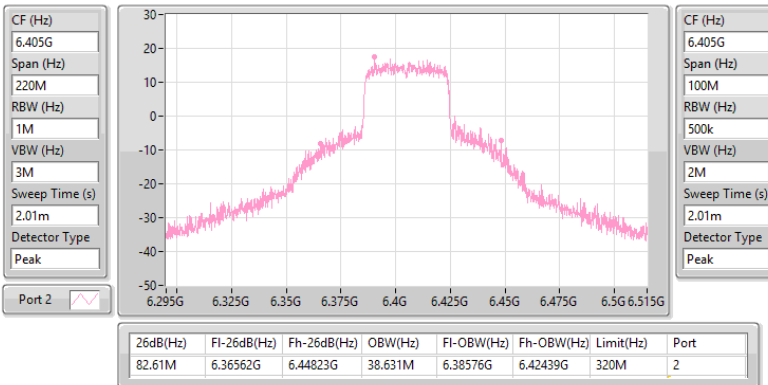
6205MHz

01/12/2025

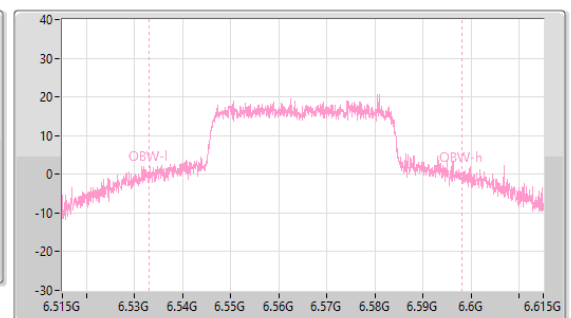
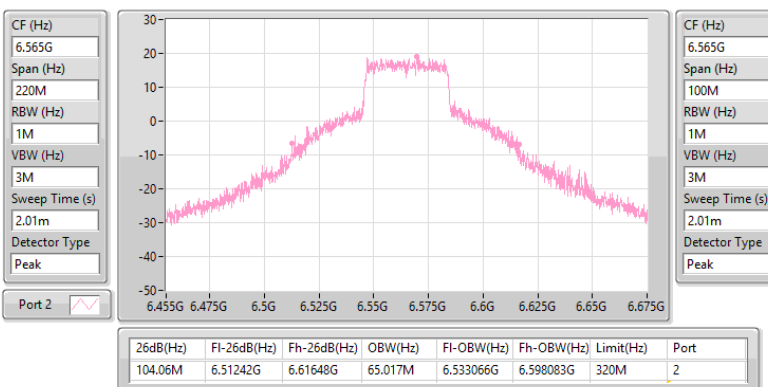


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
6405MHz

02/12/2025


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
6565MHz

01/12/2025

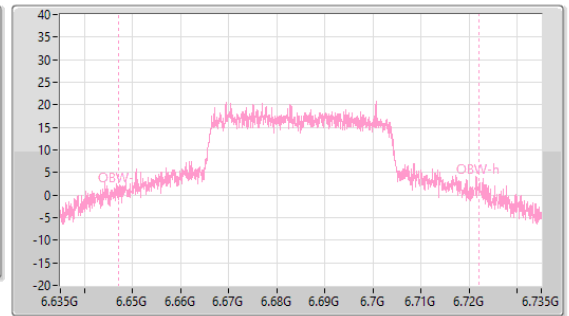
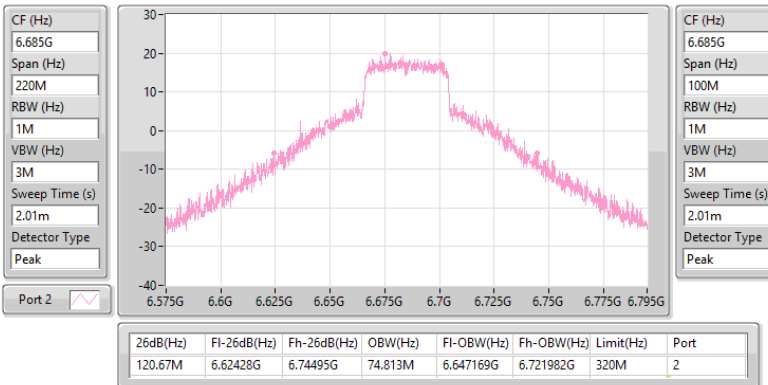


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

6685MHz

01/12/2025

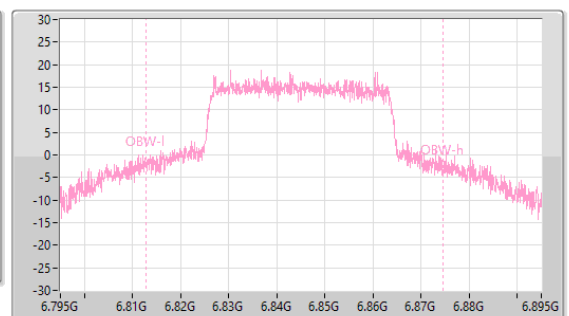
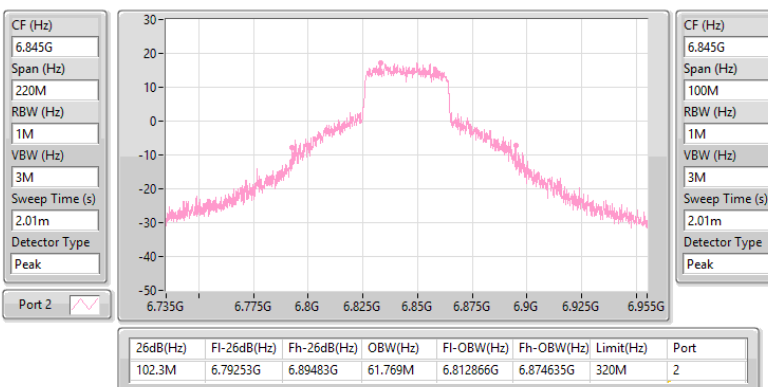


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

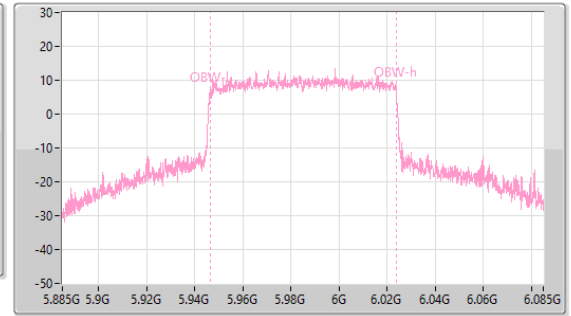
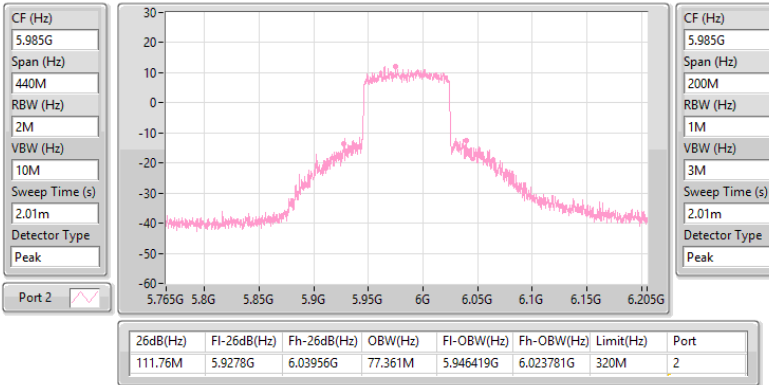
6845MHz

01/12/2025

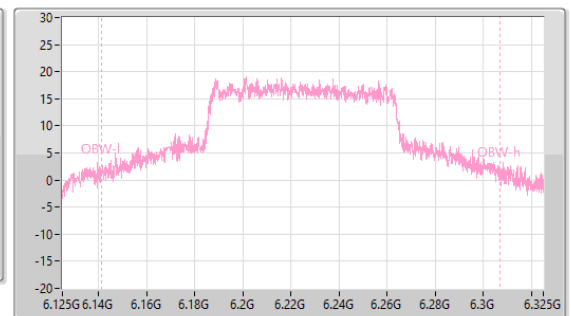
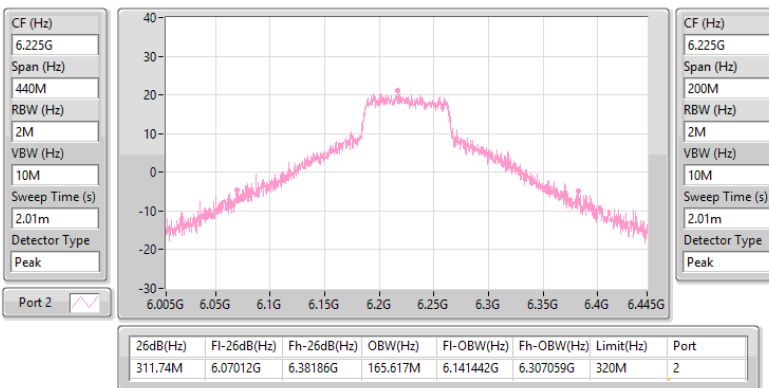


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX
EBW
5985MHz

01/12/2025


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX
EBW
6225MHz

01/12/2025

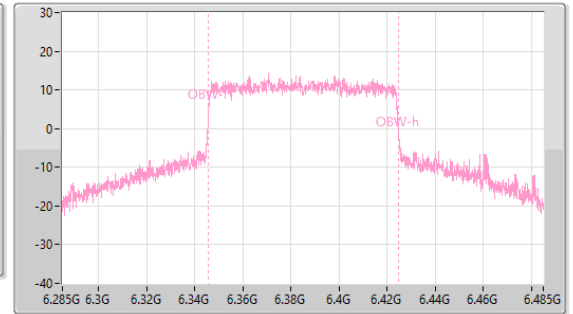
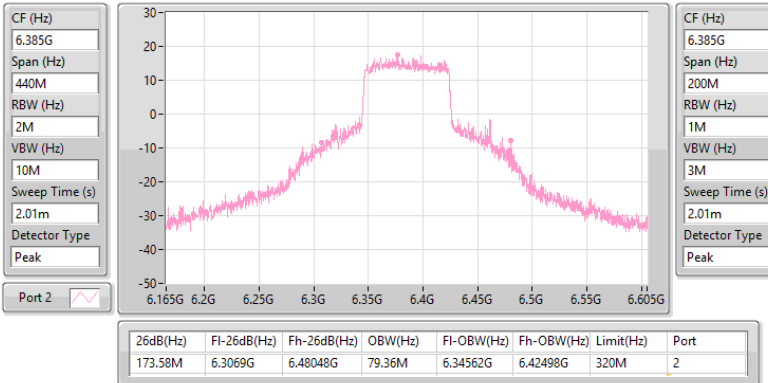


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6385MHz

02/12/2025

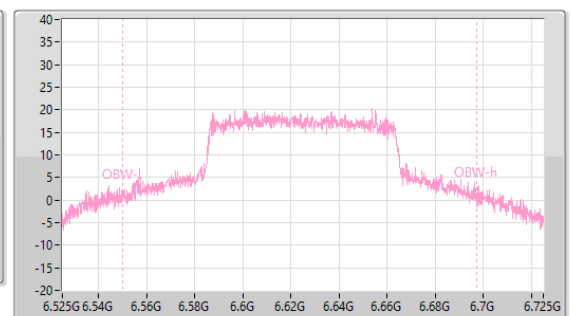
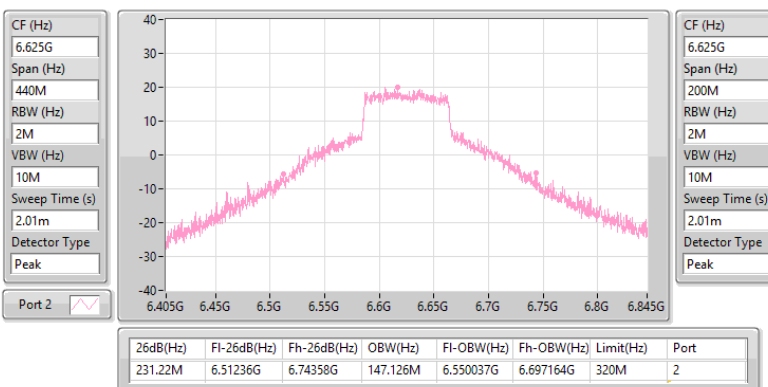


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

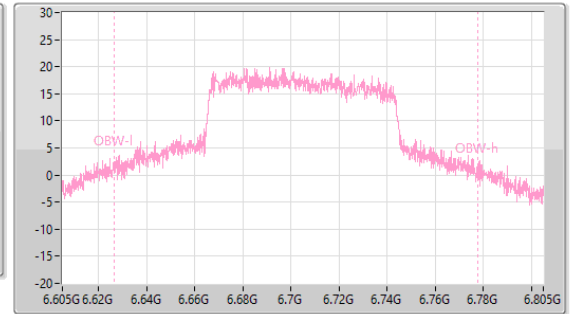
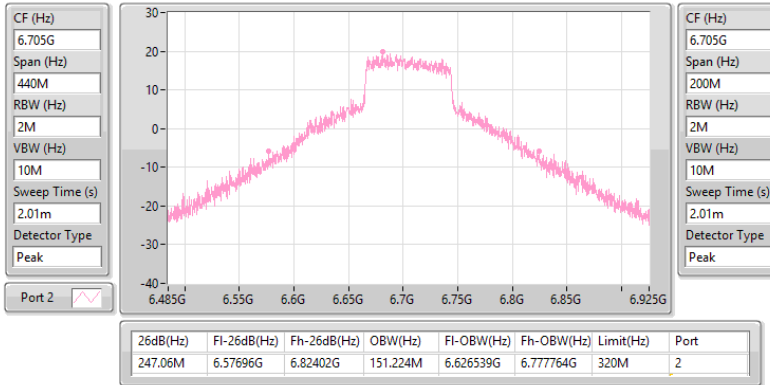
6625MHz

01/12/2025

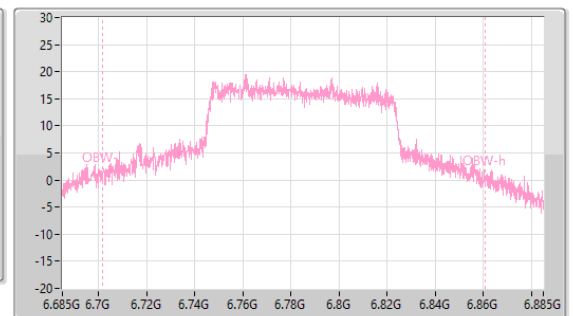
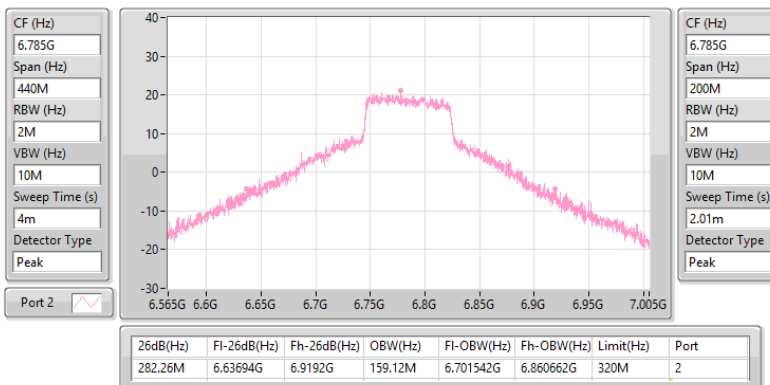


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX
EBW
6705MHz

01/12/2025


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX
EBW
6785MHz

01/12/2025

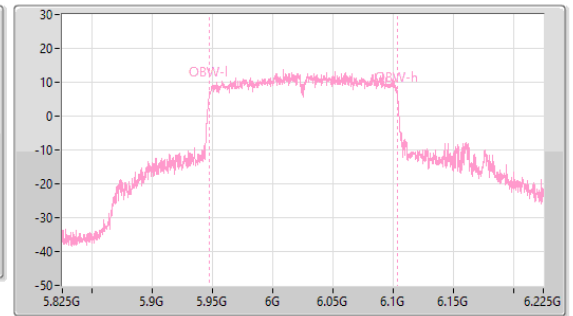
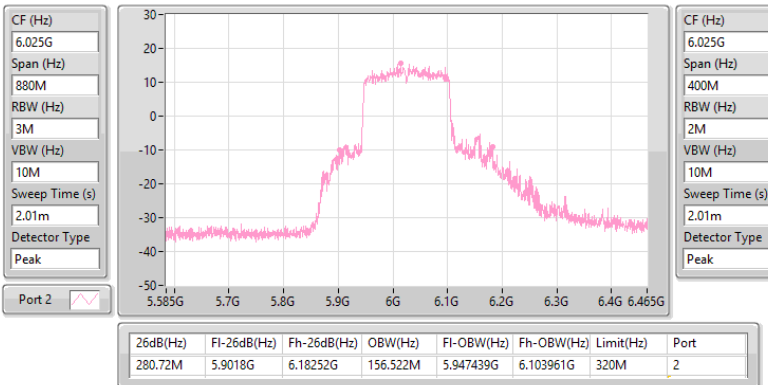


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

EBW

6025MHz

01/12/2025

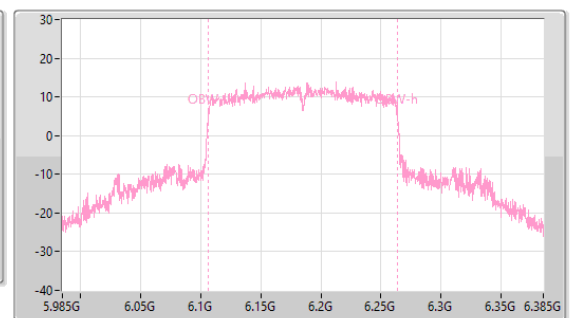
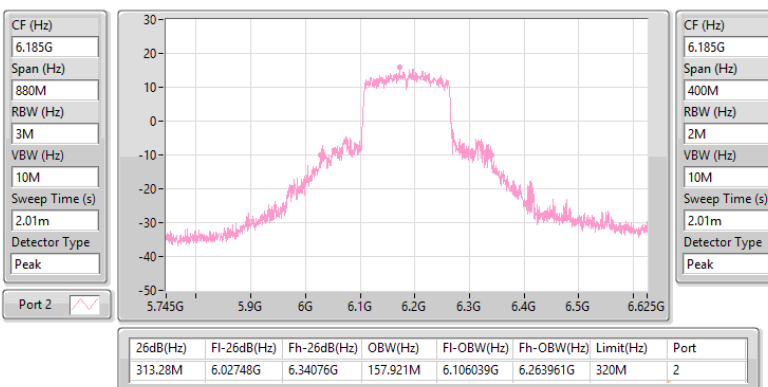


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

EBW

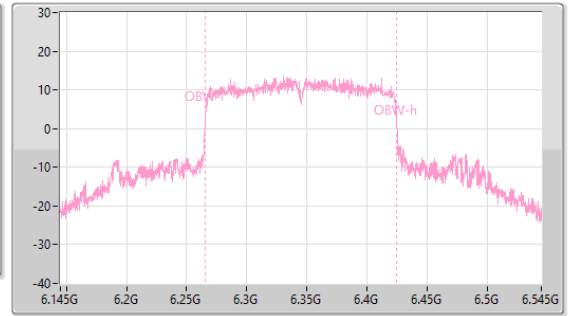
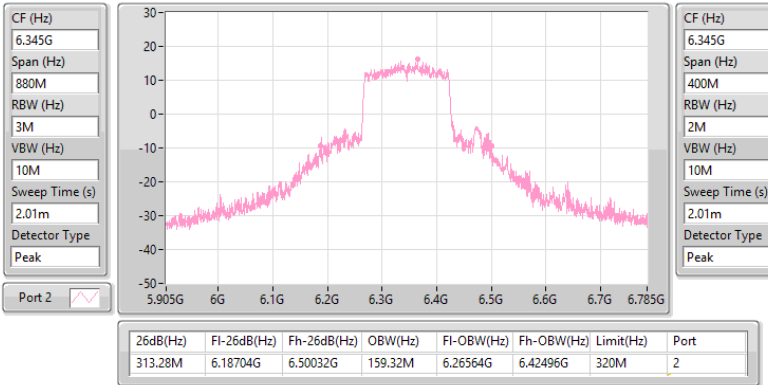
6185MHz

01/12/2025

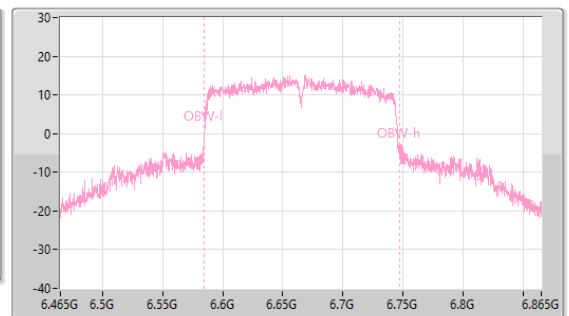
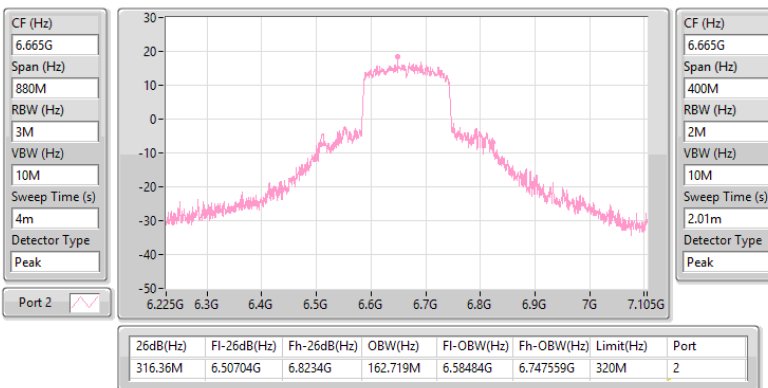


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX
EBW
6345MHz

01/12/2025

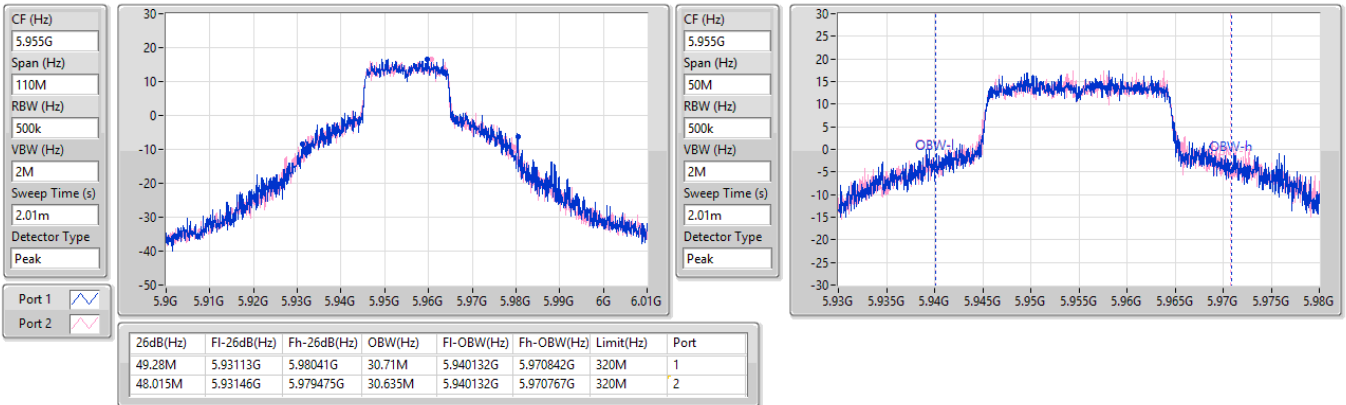

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX
EBW
6665MHz

01/12/2025

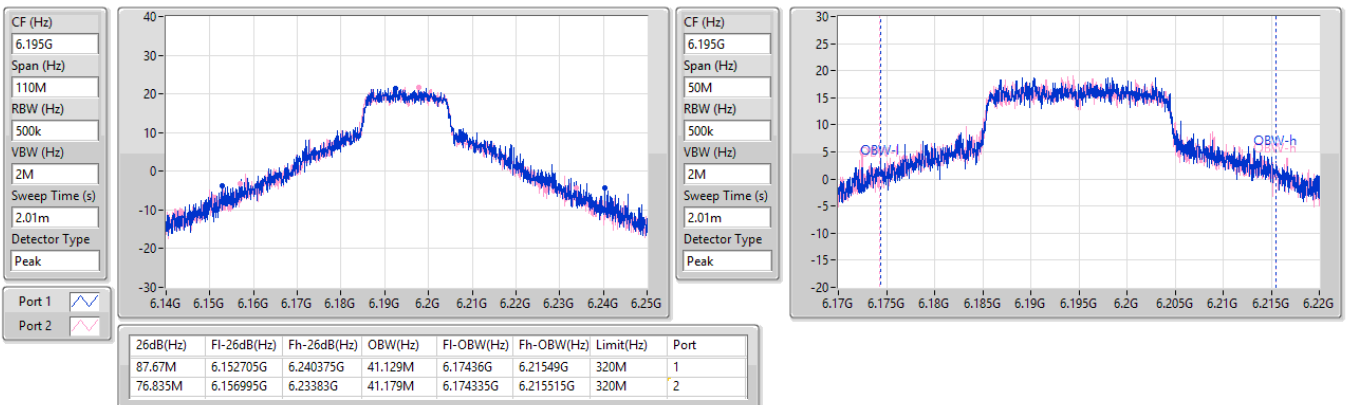


5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
5955MHz

01/12/2025

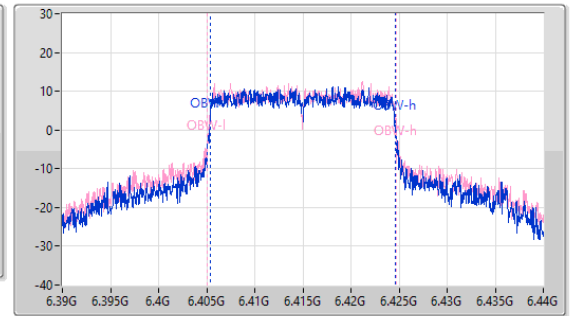
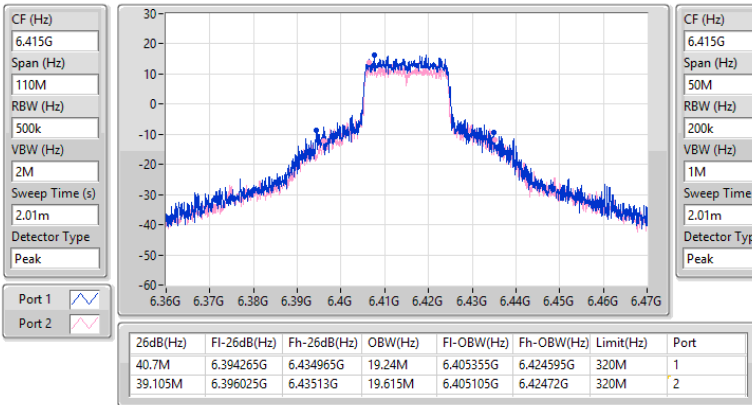

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
6195MHz

01/12/2025

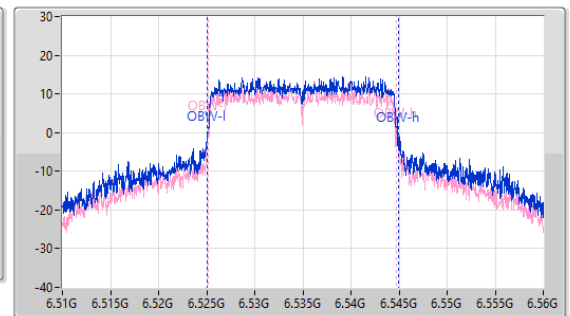
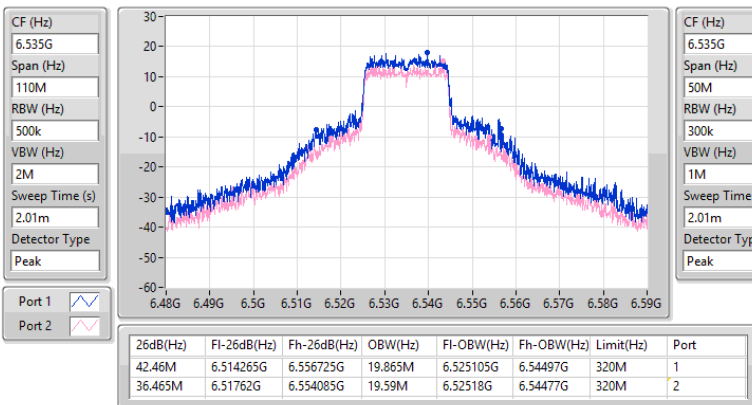


5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
6415MHz

02/12/2025


6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
6535MHz

02/12/2025

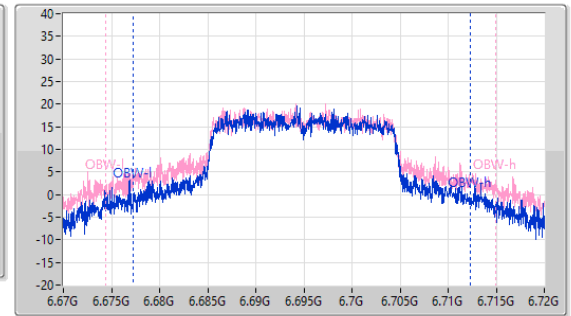
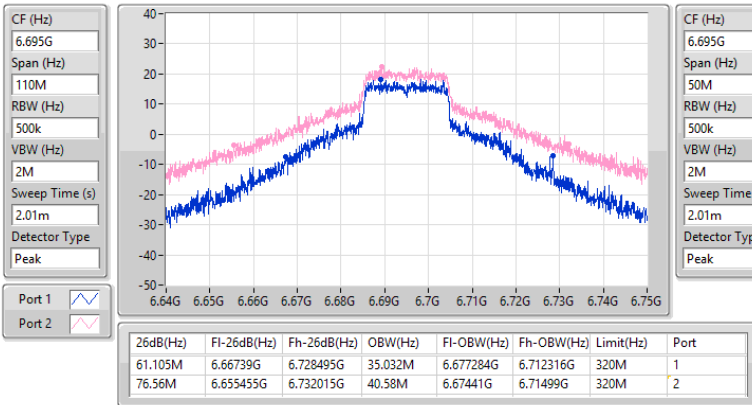


6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

EBW

6695MHz

01/12/2025

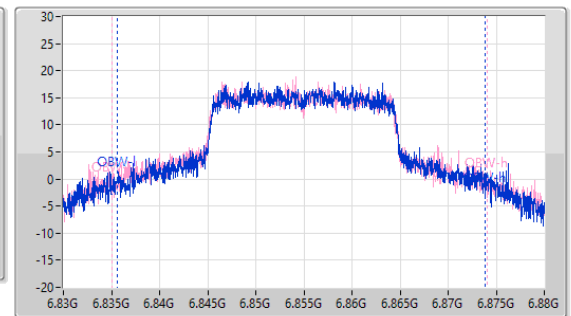
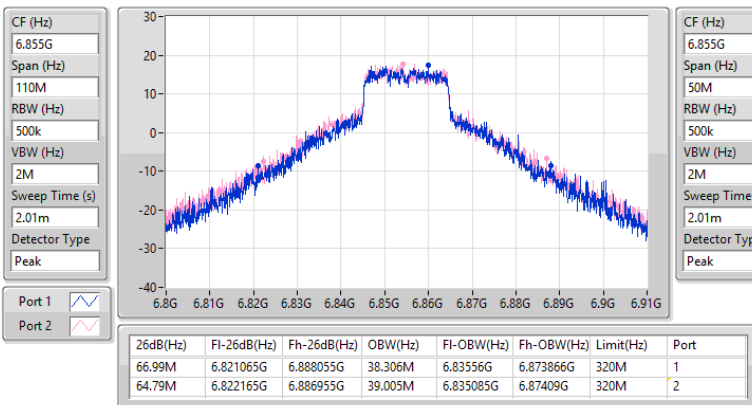


6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

EBW

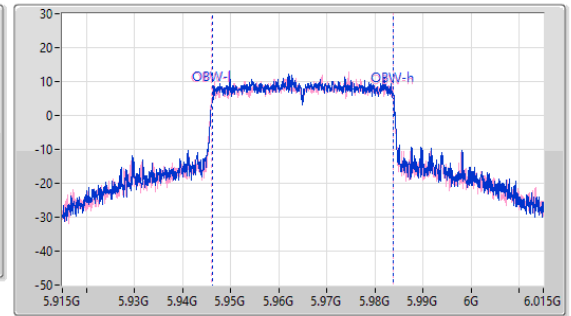
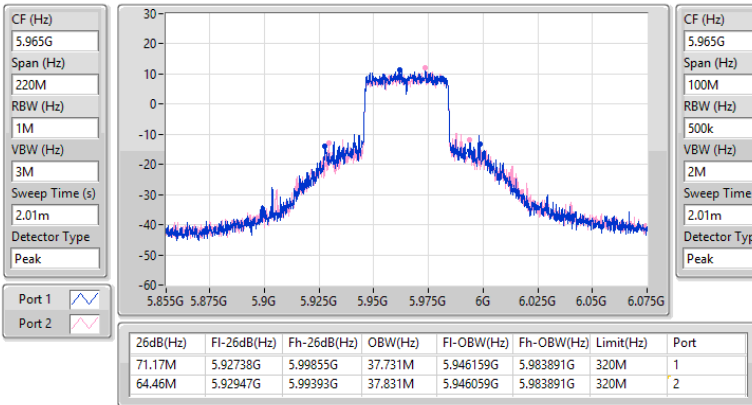
6855MHz

01/12/2025

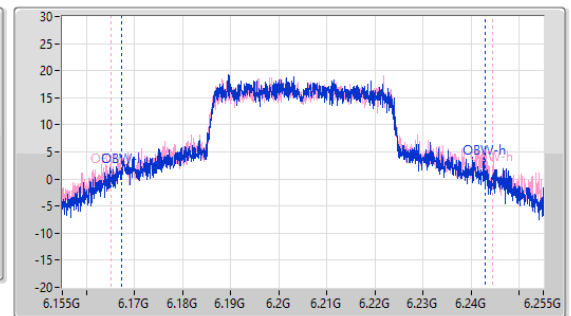
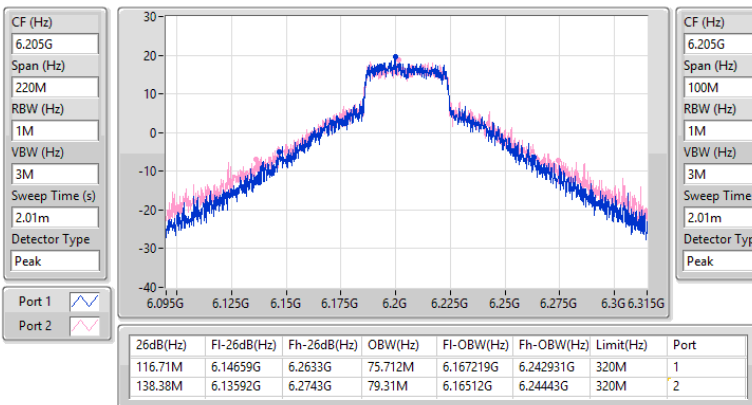


5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
5965MHz

01/12/2025

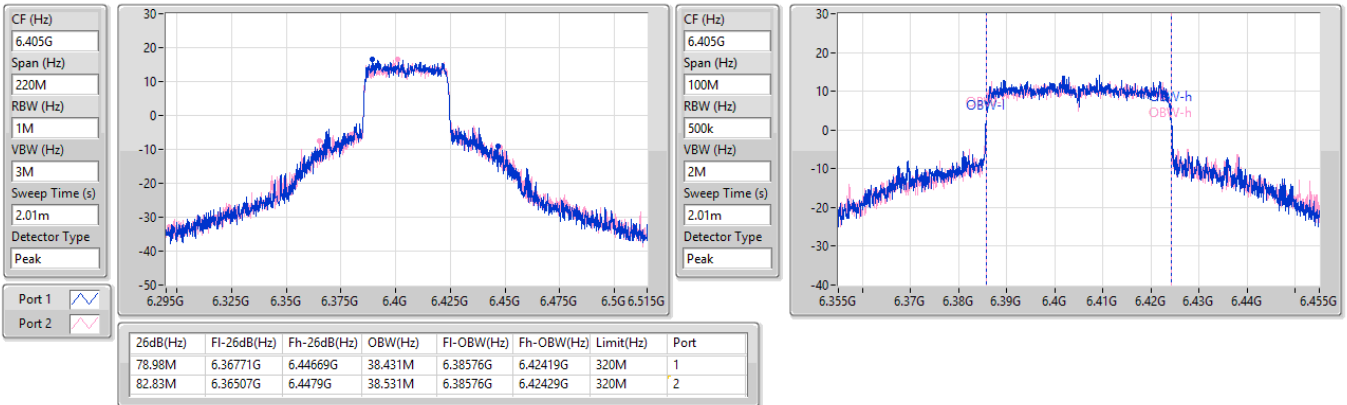

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
6205MHz

01/12/2025

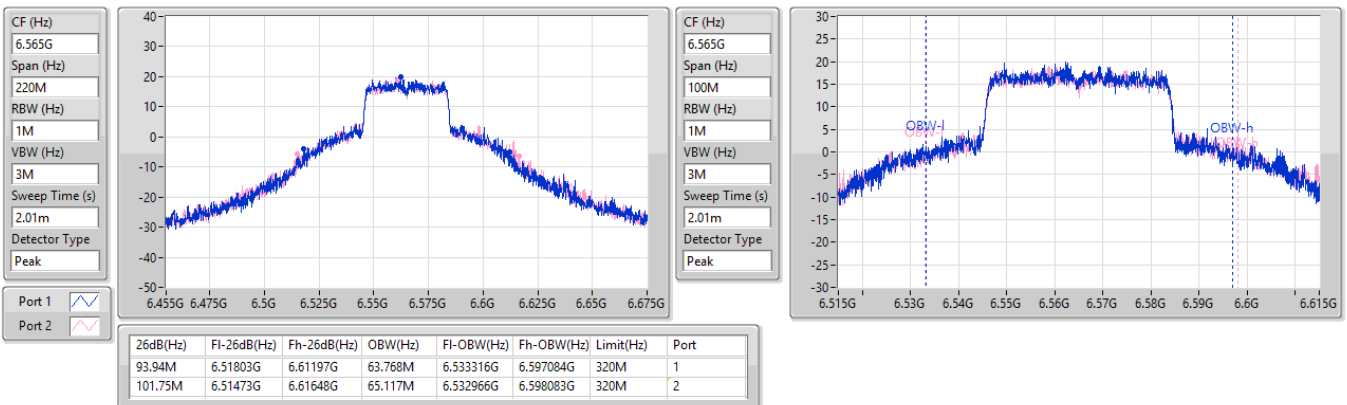


5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
6405MHz

02/12/2025


6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
6565MHz

01/12/2025

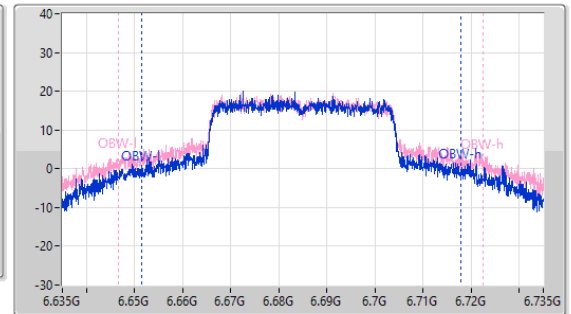
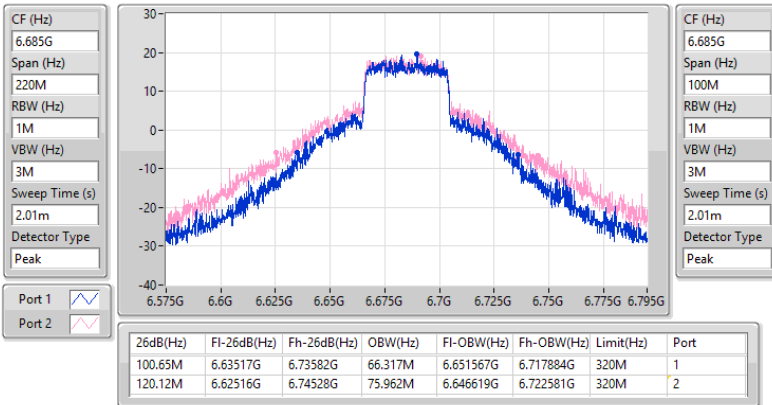


6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

EBW

6685MHz

01/12/2025

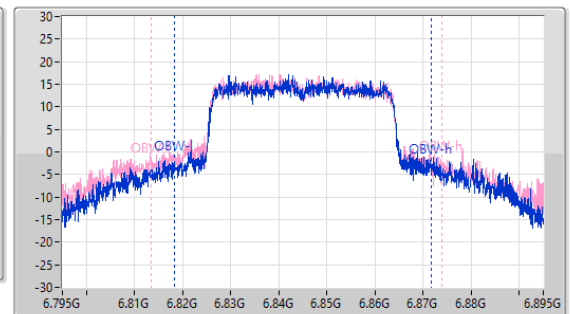
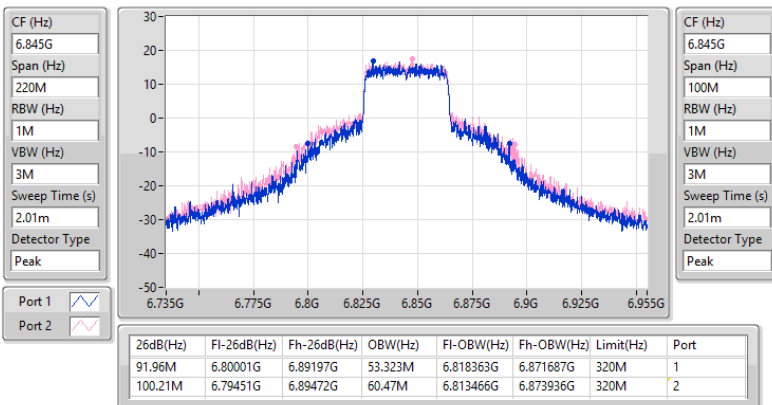


6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

EBW

6845MHz

01/12/2025

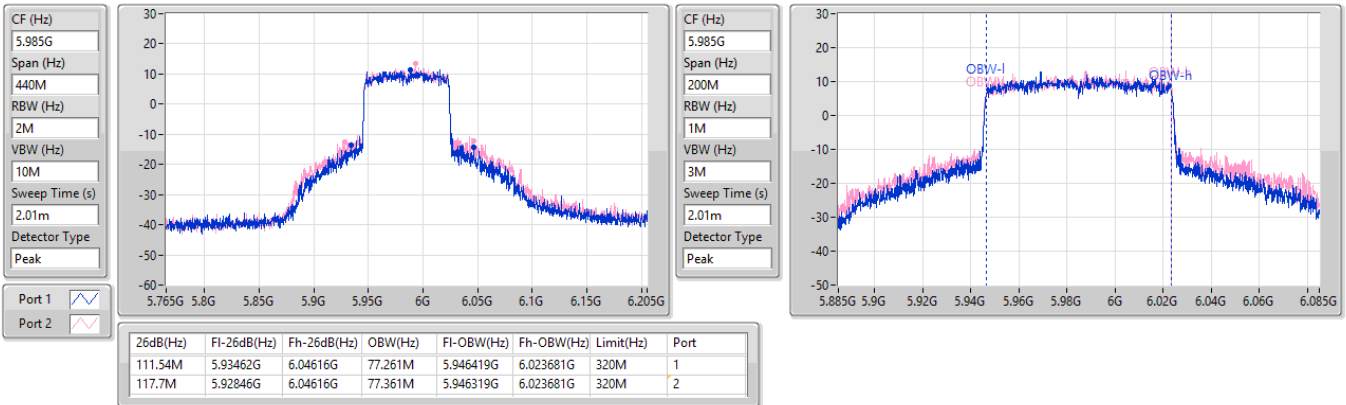


5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

EBW

5985MHz

01/12/2025

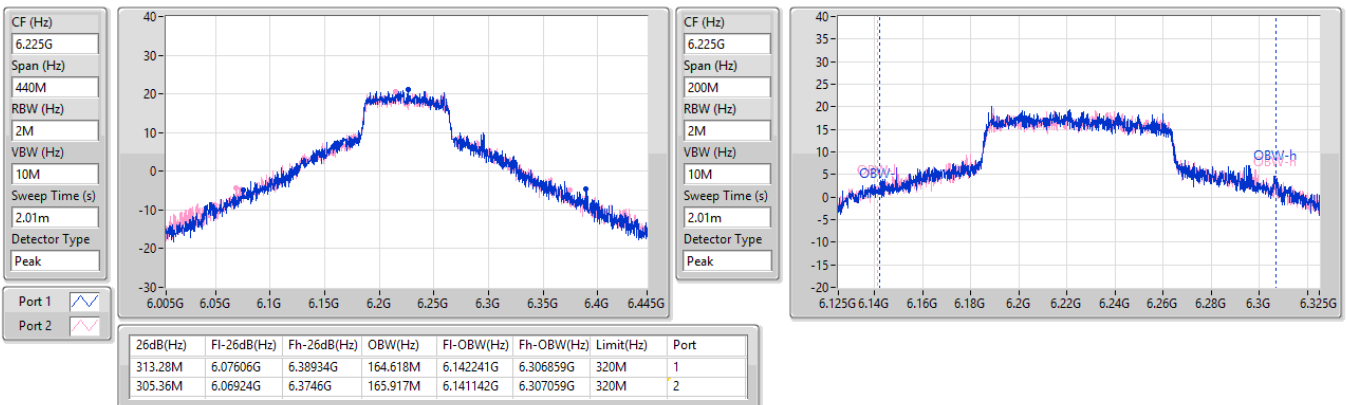


5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

EBW

6225MHz

01/12/2025

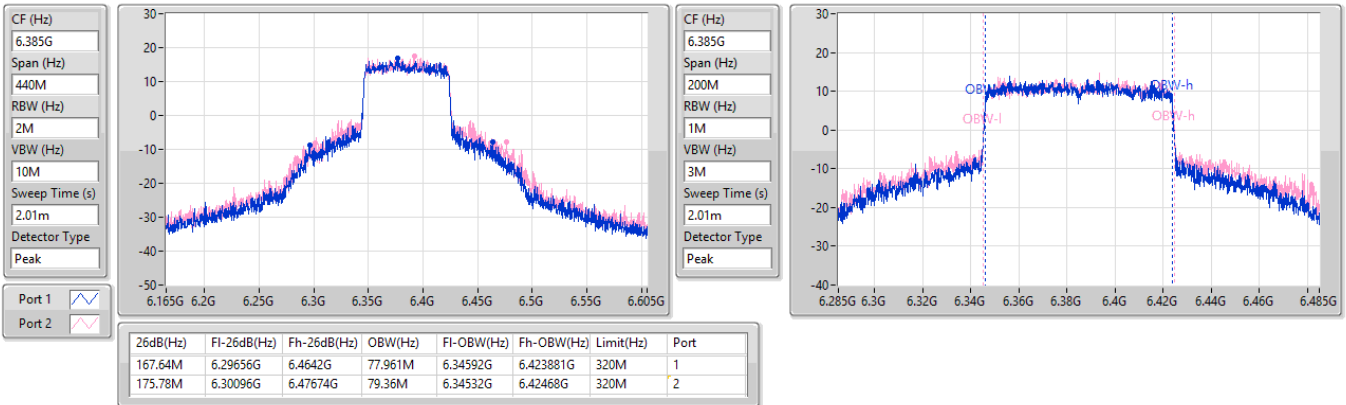


5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

EBW

6385MHz

02/12/2025

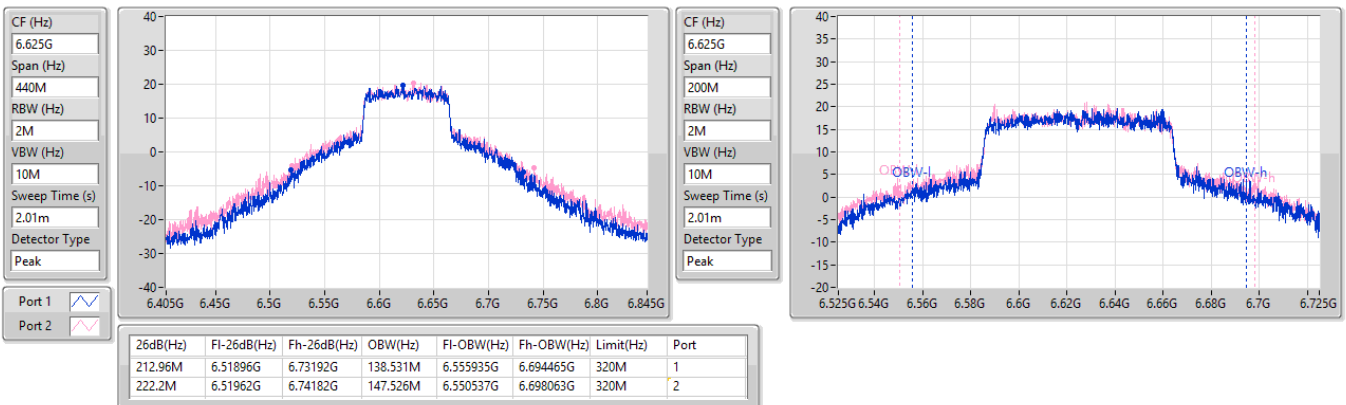


6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

EBW

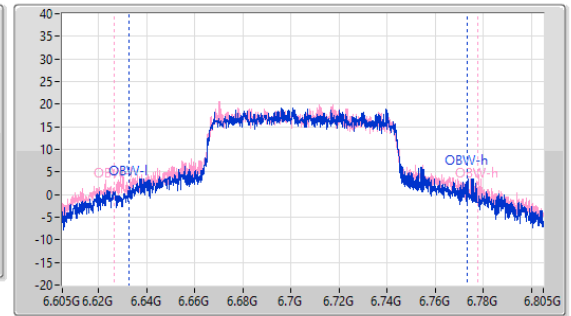
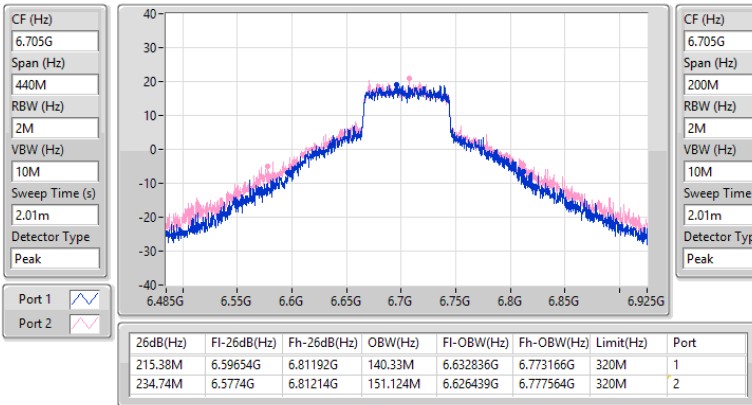
6625MHz

01/12/2025

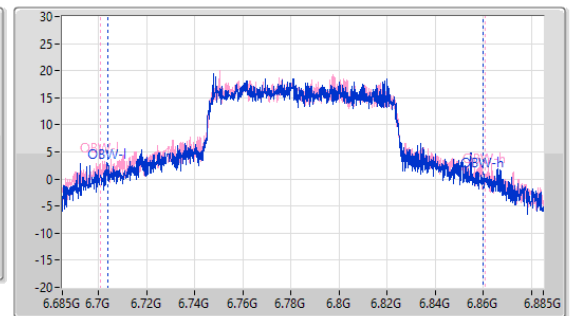
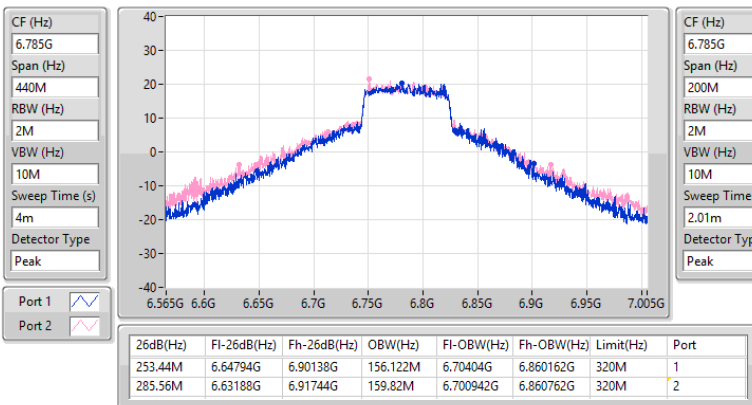


6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX
EBW
6705MHz

01/12/2025

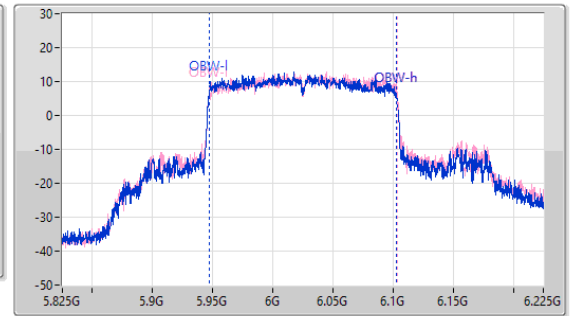
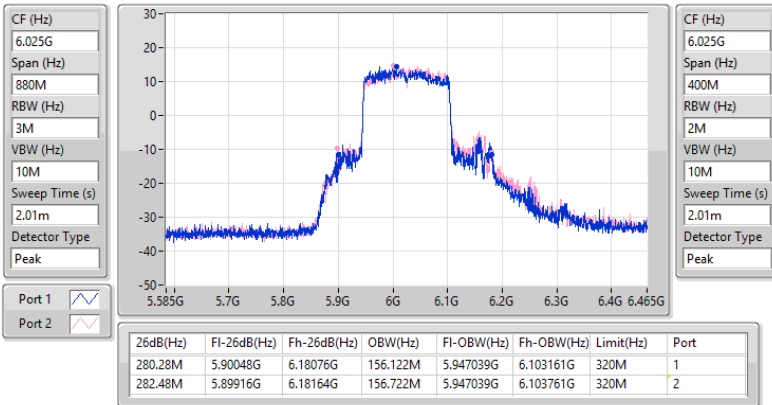

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX
EBW
6785MHz

01/12/2025

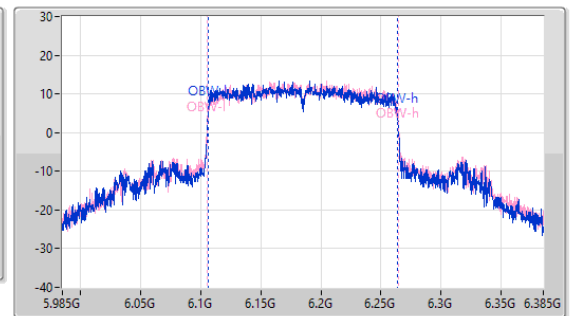
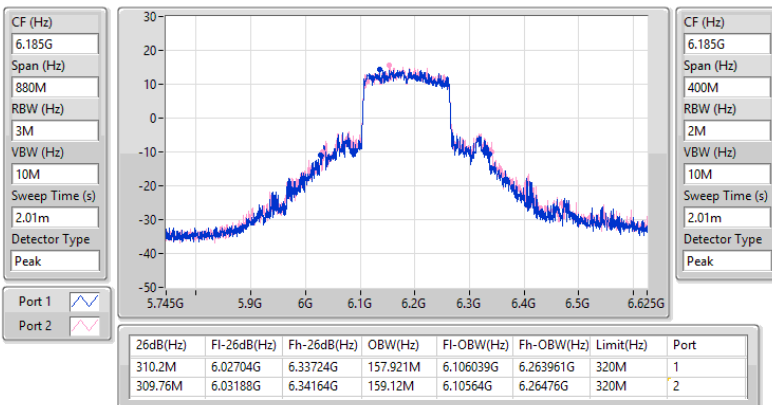


5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX
EBW
6025MHz

01/12/2025


5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX
EBW
6185MHz

01/12/2025

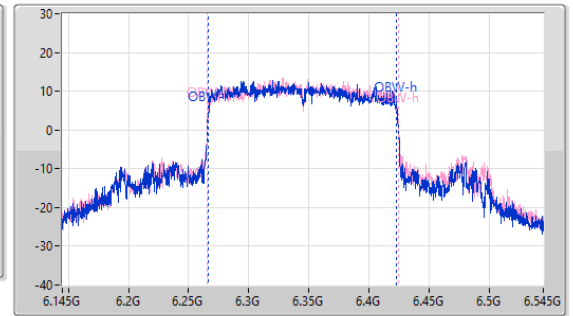
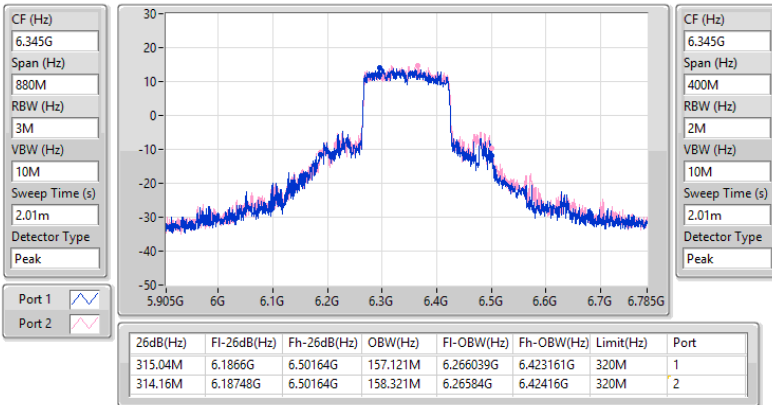


5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

EBW

6345MHz

01/12/2025

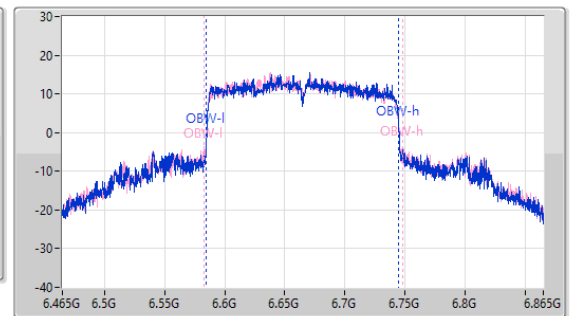
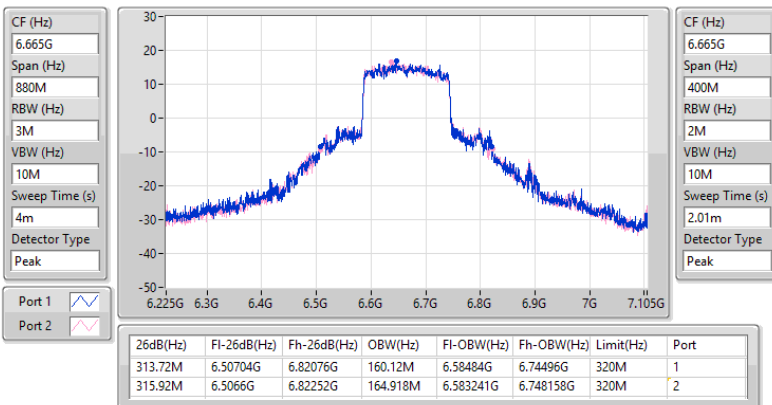


6.525-6.875GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

EBW

6665MHz

01/12/2025



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	25.20	0.33113	30.08	1.01859
802.11ax HEW20_Nss1,(MCS0)_2TX	25.10	0.32359	29.98	0.99541
802.11ax HEW20_Nss2,(MCS0)_2TX	28.11	0.64714	32.73	1.87499
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	25.10	0.32359	32.72	1.87068
802.11ax HEW40_Nss1,(MCS0)_1TX	24.81	0.30269	29.69	0.93111
802.11ax HEW40_Nss1,(MCS0)_2TX	24.61	0.28907	29.49	0.88920
802.11ax HEW40_Nss2,(MCS0)_2TX	27.62	0.57810	32.24	1.67494
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	24.61	0.28907	32.23	1.67109
802.11ax HEW80_Nss1,(MCS0)_1TX	24.64	0.29107	29.52	0.89536
802.11ax HEW80_Nss1,(MCS0)_2TX	24.49	0.28119	29.37	0.86497
802.11ax HEW80_Nss2,(MCS0)_2TX	27.50	0.56234	32.12	1.62930
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	24.49	0.28119	32.11	1.62555
802.11ax HEW160_Nss1,(MCS0)_1TX	21.20	0.13183	26.08	0.40551
802.11ax HEW160_Nss1,(MCS0)_2TX	20.56	0.11376	25.44	0.34995
802.11ax HEW160_Nss2,(MCS0)_2TX	23.57	0.22751	28.19	0.65917
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	20.56	0.11376	28.18	0.65766
6.525-6.875GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	25.72	0.37325	30.97	1.25026
802.11ax HEW20_Nss1,(MCS0)_2TX	25.28	0.33729	30.53	1.12980
802.11ax HEW20_Nss2,(MCS0)_2TX	28.29	0.67453	33.21	2.09411
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	25.28	0.33729	33.20	2.08930
802.11ax HEW40_Nss1,(MCS0)_1TX	25.42	0.34834	30.67	1.16681
802.11ax HEW40_Nss1,(MCS0)_2TX	24.94	0.31189	30.19	1.04472
802.11ax HEW40_Nss2,(MCS0)_2TX	27.95	0.62373	32.87	1.93642
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	24.94	0.31189	32.86	1.93197
802.11ax HEW80_Nss1,(MCS0)_1TX	25.45	0.35075	30.70	1.17490
802.11ax HEW80_Nss1,(MCS0)_2TX	25.10	0.32359	30.35	1.08393
802.11ax HEW80_Nss2,(MCS0)_2TX	28.11	0.64714	33.03	2.00909
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	25.10	0.32359	33.02	2.00447
802.11ax HEW160_Nss1,(MCS0)_1TX	22.67	0.18493	27.92	0.61944
802.11ax HEW160_Nss1,(MCS0)_2TX	22.01	0.15885	27.26	0.53211
802.11ax HEW160_Nss2,(MCS0)_2TX	25.02	0.31769	29.94	0.98628
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	22.01	0.15885	29.93	0.98401

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5955MHz	Pass	4.88	-	22.40	22.40	27.28	36.00
6195MHz	Pass	4.88	-	25.20	25.20	30.08	36.00
6415MHz	Pass	4.88	-	22.28	22.28	27.16	36.00
6535MHz	Pass	5.25	-	23.12	23.12	28.37	36.00
6695MHz	Pass	5.25	-	25.72	25.72	30.97	36.00
6855MHz	Pass	5.25	-	24.18	24.18	29.43	36.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5965MHz	Pass	4.88	-	19.91	19.91	24.79	36.00
6205MHz	Pass	4.88	-	24.81	24.81	29.69	36.00
6405MHz	Pass	4.88	-	22.22	22.22	27.10	36.00
6565MHz	Pass	5.25	-	25.00	25.00	30.25	36.00
6685MHz	Pass	5.25	-	25.42	25.42	30.67	36.00
6845MHz	Pass	5.25	-	23.23	23.23	28.48	36.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5985MHz	Pass	4.88	-	20.21	20.21	25.09	36.00
6225MHz	Pass	4.88	-	24.64	24.64	29.52	36.00
6385MHz	Pass	4.88	-	22.18	22.18	27.06	36.00
6625MHz	Pass	5.25	-	25.45	25.45	30.70	36.00
6705MHz	Pass	5.25	-	25.09	25.09	30.34	36.00
6785MHz	Pass	5.25	-	24.44	24.44	29.69	36.00
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
6025MHz	Pass	4.88	-	20.76	20.76	25.64	36.00
6185MHz	Pass	4.88	-	20.94	20.94	25.82	36.00
6345MHz	Pass	4.88	-	21.20	21.20	26.08	36.00
6665MHz	Pass	5.25	-	22.67	22.67	27.92	36.00
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	4.88	19.71	19.59	22.66	27.54	36.00
6195MHz	Pass	4.88	22.15	22.02	25.10	29.98	36.00
6415MHz	Pass	4.88	18.88	19.56	22.24	27.12	36.00
6535MHz	Pass	5.25	20.44	20.20	23.33	28.58	36.00
6695MHz	Pass	5.25	21.88	22.63	25.28	30.53	36.00
6855MHz	Pass	5.25	21.09	21.14	24.13	29.38	36.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	4.88	17.10	16.70	19.91	24.79	36.00
6205MHz	Pass	4.88	21.60	21.60	24.61	29.49	36.00
6405MHz	Pass	4.88	19.16	18.98	22.08	26.96	36.00
6565MHz	Pass	5.25	22.00	21.82	24.92	30.17	36.00
6685MHz	Pass	5.25	21.61	22.23	24.94	30.19	36.00
6845MHz	Pass	5.25	19.30	19.80	22.57	27.82	36.00
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	4.88	17.01	17.36	20.20	25.08	36.00
6225MHz	Pass	4.88	21.55	21.40	24.49	29.37	36.00
6385MHz	Pass	4.88	18.82	19.12	21.98	26.86	36.00
6625MHz	Pass	5.25	21.93	22.24	25.10	30.35	36.00
6705MHz	Pass	5.25	21.57	21.91	24.75	30.00	36.00
6785MHz	Pass	5.25	20.91	21.24	24.09	29.34	36.00
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	4.88	16.73	17.00	19.88	24.76	36.00
6185MHz	Pass	4.88	17.44	17.65	20.56	25.44	36.00
6345MHz	Pass	4.88	17.09	17.31	20.21	25.09	36.00
6665MHz	Pass	5.25	18.96	19.04	22.01	27.26	36.00
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	4.62	22.72	22.60	25.67	30.29	36.00
6195MHz	Pass	4.62	25.16	25.03	28.11	32.73	36.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6415MHz	Pass	4.62	21.89	22.57	25.25	29.87	36.00
6535MHz	Pass	4.92	23.45	23.21	26.34	31.26	36.00
6695MHz	Pass	4.92	24.89	25.64	28.29	33.21	36.00
6855MHz	Pass	4.92	24.10	24.15	27.14	32.06	36.00
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	4.62	20.11	19.71	22.92	27.54	36.00
6205MHz	Pass	4.62	24.61	24.61	27.62	32.24	36.00
6405MHz	Pass	4.62	22.17	21.99	25.09	29.71	36.00
6565MHz	Pass	4.92	25.01	24.83	27.93	32.85	36.00
6685MHz	Pass	4.92	24.62	25.24	27.95	32.87	36.00
6845MHz	Pass	4.92	22.31	22.81	25.58	30.50	36.00
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	4.62	20.02	20.37	23.21	27.83	36.00
6225MHz	Pass	4.62	24.56	24.41	27.50	32.12	36.00
6385MHz	Pass	4.62	21.83	22.13	24.99	29.61	36.00
6625MHz	Pass	4.92	24.94	25.25	28.11	33.03	36.00
6705MHz	Pass	4.92	24.58	24.92	27.76	32.68	36.00
6785MHz	Pass	4.92	23.92	24.25	27.10	32.02	36.00
802.11ax HEW160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	4.62	19.74	20.01	22.89	27.51	36.00
6185MHz	Pass	4.62	20.45	20.66	23.57	28.19	36.00
6345MHz	Pass	4.62	20.10	20.32	23.22	27.84	36.00
6665MHz	Pass	4.92	21.97	22.05	25.02	29.94	36.00
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	7.62	19.71	19.59	22.66	30.28	36.00
6195MHz	Pass	7.62	22.15	22.02	25.10	32.72	36.00
6415MHz	Pass	7.62	18.88	19.56	22.24	29.86	36.00
6535MHz	Pass	7.92	20.44	20.20	23.33	31.25	36.00
6695MHz	Pass	7.92	21.88	22.63	25.28	33.20	36.00
6855MHz	Pass	7.92	21.09	21.14	24.13	32.05	36.00
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	7.62	17.10	16.70	19.91	27.53	36.00
6205MHz	Pass	7.62	21.60	21.60	24.61	32.23	36.00
6405MHz	Pass	7.62	19.16	18.98	22.08	29.70	36.00
6565MHz	Pass	7.92	22.00	21.82	24.92	32.84	36.00
6685MHz	Pass	7.92	21.61	22.23	24.94	32.86	36.00
6845MHz	Pass	7.92	19.30	19.80	22.57	30.49	36.00
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	7.62	17.01	17.36	20.20	27.82	36.00
6225MHz	Pass	7.62	21.55	21.40	24.49	32.11	36.00
6385MHz	Pass	7.62	18.82	19.12	21.98	29.60	36.00
6625MHz	Pass	7.92	21.93	22.24	25.10	33.02	36.00
6705MHz	Pass	7.92	21.57	21.91	24.75	32.67	36.00
6785MHz	Pass	7.92	20.91	21.24	24.09	32.01	36.00
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	7.62	16.73	17.00	19.88	27.50	36.00
6185MHz	Pass	7.62	17.44	17.65	20.56	28.18	36.00
6345MHz	Pass	7.62	17.09	17.31	20.21	27.83	36.00
6665MHz	Pass	7.92	18.96	19.04	22.01	29.93	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	11.34	16.22
802.11ax HEW20_Nss2,(MCS0)_2TX	14.28	18.90
802.11ax HEW40_Nss1,(MCS0)_1TX	8.32	13.20
802.11ax HEW40_Nss2,(MCS0)_2TX	11.20	15.82
802.11ax HEW80_Nss1,(MCS0)_1TX	5.35	10.23
802.11ax HEW80_Nss2,(MCS0)_2TX	8.60	13.22
802.11ax HEW160_Nss1,(MCS0)_1TX	-0.02	4.86
802.11ax HEW160_Nss2,(MCS0)_2TX	2.95	7.57
6.525-6.875GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	11.70	16.95
802.11ax HEW20_Nss2,(MCS0)_2TX	14.39	19.31
802.11ax HEW40_Nss1,(MCS0)_1TX	8.86	14.11
802.11ax HEW40_Nss2,(MCS0)_2TX	11.54	16.46
802.11ax HEW80_Nss1,(MCS0)_1TX	6.28	11.53
802.11ax HEW80_Nss2,(MCS0)_2TX	9.13	14.05
802.11ax HEW160_Nss1,(MCS0)_1TX	1.53	6.78
802.11ax HEW160_Nss2,(MCS0)_2TX	4.41	9.33

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5955MHz	Pass	4.88	-	8.86	8.86	13.74	23.00
6195MHz	Pass	4.88	-	11.34	11.34	16.22	23.00
6415MHz	Pass	4.88	-	8.76	8.76	13.64	23.00
6535MHz	Pass	5.25	-	9.63	9.63	14.88	23.00
6695MHz	Pass	5.25	-	11.70	11.70	16.95	23.00
6855MHz	Pass	5.25	-	10.35	10.35	15.60	23.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5965MHz	Pass	4.88	-	3.62	3.62	8.50	23.00
6205MHz	Pass	4.88	-	8.32	8.32	13.20	23.00
6405MHz	Pass	4.88	-	5.95	5.95	10.83	23.00
6565MHz	Pass	5.25	-	8.47	8.47	13.72	23.00
6685MHz	Pass	5.25	-	8.86	8.86	14.11	23.00
6845MHz	Pass	5.25	-	6.96	6.96	12.21	23.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5985MHz	Pass	4.88	-	1.51	1.51	6.39	23.00
6225MHz	Pass	4.88	-	5.35	5.35	10.23	23.00
6385MHz	Pass	4.88	-	3.55	3.55	8.43	23.00
6625MHz	Pass	5.25	-	6.28	6.28	11.53	23.00
6705MHz	Pass	5.25	-	5.93	5.93	11.18	23.00
6785MHz	Pass	5.25	-	5.21	5.21	10.46	23.00
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
6025MHz	Pass	4.88	-	-0.41	-0.41	4.47	23.00
6185MHz	Pass	4.88	-	-0.20	-0.20	4.68	23.00
6345MHz	Pass	4.88	-	-0.02	-0.02	4.86	23.00
6665MHz	Pass	5.25	-	1.53	1.53	6.78	23.00
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	4.62	9.26	9.02	12.15	16.77	23.00
6195MHz	Pass	4.62	11.47	11.28	14.28	18.90	23.00
6415MHz	Pass	4.62	8.38	9.00	11.69	16.31	23.00
6535MHz	Pass	4.92	9.93	9.58	12.74	17.66	23.00
6695MHz	Pass	4.92	11.14	11.72	14.39	19.31	23.00
6855MHz	Pass	4.92	10.37	10.36	13.29	18.21	23.00
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	4.62	4.11	3.70	6.87	11.49	23.00
6205MHz	Pass	4.62	8.42	8.19	11.20	15.82	23.00
6405MHz	Pass	4.62	6.13	5.85	8.95	13.57	23.00
6565MHz	Pass	4.92	8.60	8.42	11.41	16.33	23.00
6685MHz	Pass	4.92	8.32	8.84	11.54	16.46	23.00
6845MHz	Pass	4.92	6.18	6.72	9.39	14.31	23.00
802.11ax HEW80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	4.62	1.30	1.98	4.66	9.28	23.00
6225MHz	Pass	4.62	5.75	5.46	8.60	13.22	23.00
6385MHz	Pass	4.62	3.05	3.37	6.19	10.81	23.00
6625MHz	Pass	4.92	6.02	6.47	9.13	14.05	23.00
6705MHz	Pass	4.92	5.77	6.05	8.84	13.76	23.00
6785MHz	Pass	4.92	4.93	5.46	8.19	13.11	23.00
802.11ax HEW160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	4.62	-0.77	-0.70	2.14	6.76	23.00
6185MHz	Pass	4.62	0.01	0.07	2.95	7.57	23.00
6345MHz	Pass	4.62	-0.74	-0.41	2.28	6.90	23.00
6665MHz	Pass	4.92	1.55	1.48	4.41	9.33	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

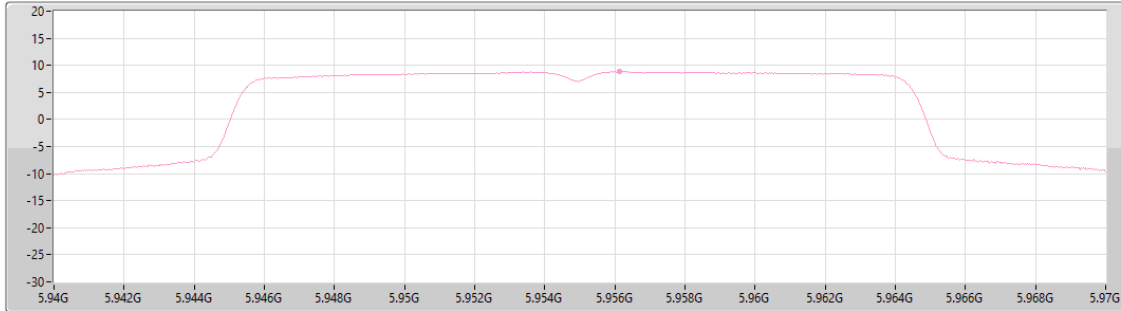
5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

5955MHz

01/12/2025

CF (Hz)
5.955G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
15.266
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.86	8.86	-	8.86

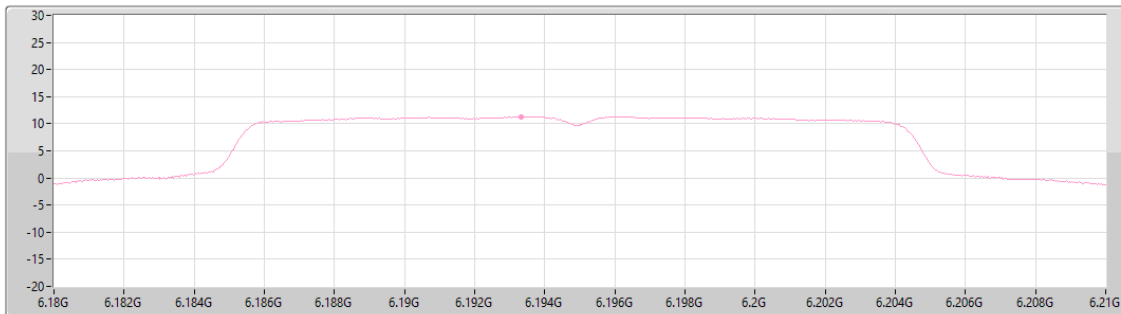
5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6195MHz

01/12/2025

CF (Hz)
6.195G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
15.266
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.34	11.34	-	11.34

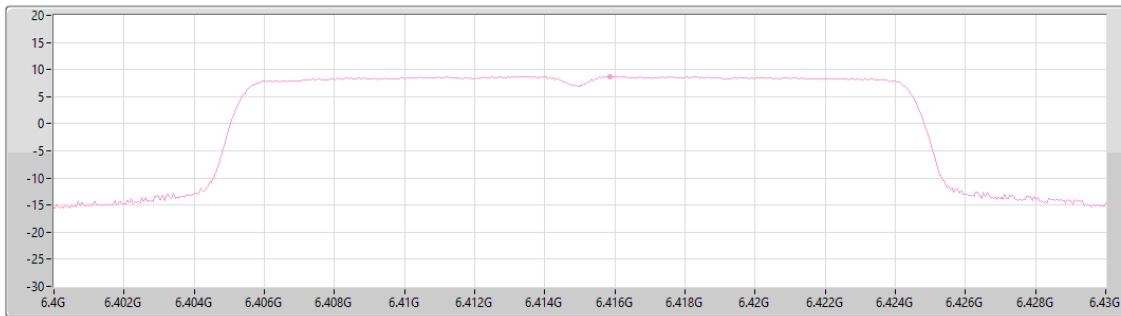
5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6415MHz

02/12/2025

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
15.266
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.76	8.76	-	8.76

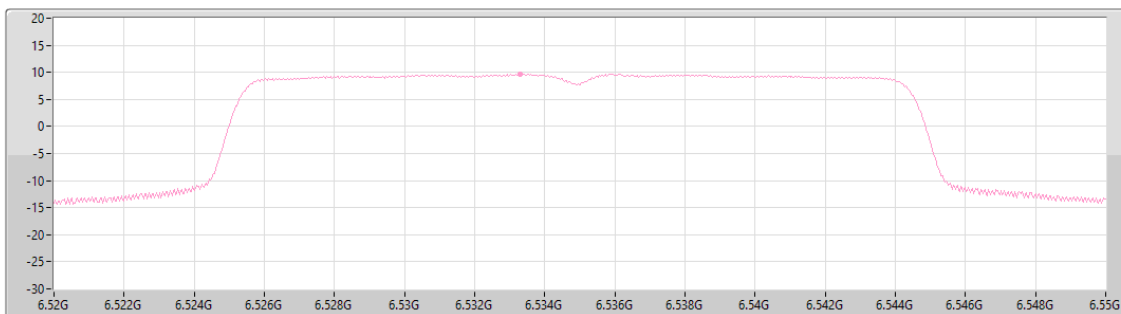
6.525-6.875GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6535MHz

02/12/2025

CF (Hz)
6.535G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
15.266
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.63	9.63	-	9.63

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6695MHz

01/12/2025

CF (Hz)
6.695G

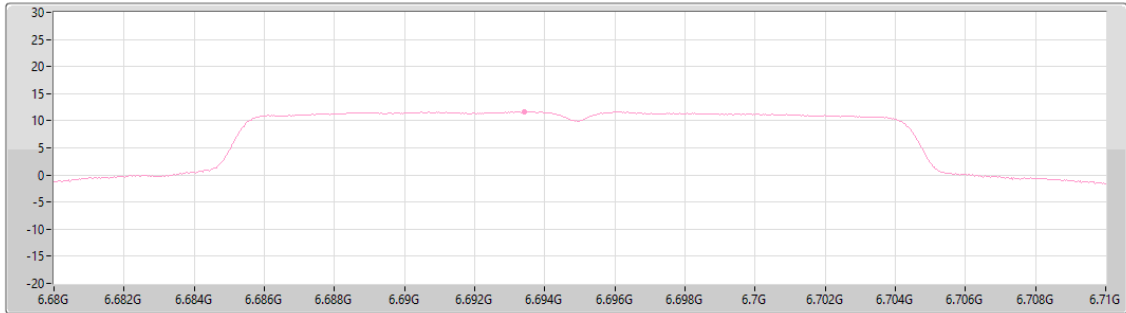
Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
15.266

Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.70	11.70	-	11.70

Port 2

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6855MHz

01/12/2025

CF (Hz)
6.855G

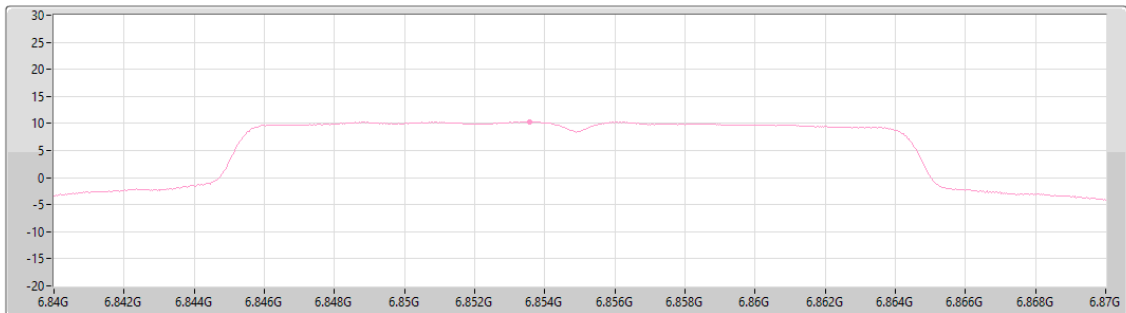
Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
15.266

Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.35	10.35	-	10.35

Port 2

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5965MHz

01/12/2025

CF (Hz)
5.965G

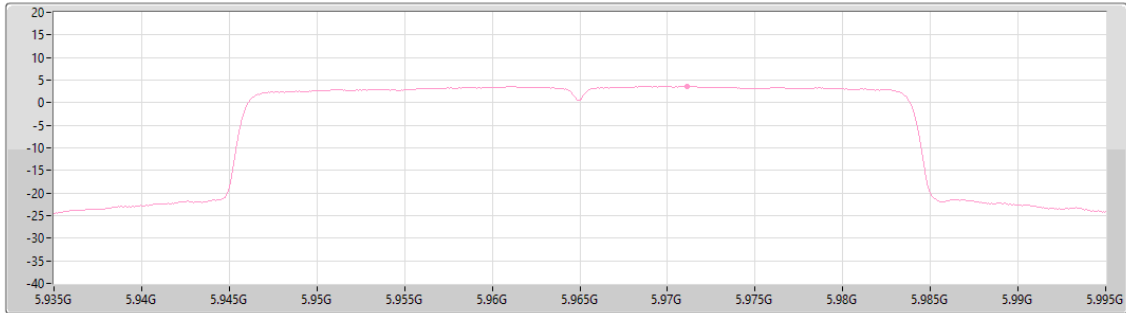
Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
8.07

Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.62	3.62	-	3.62

Port 2

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6205MHz

01/12/2025

CF (Hz)
6.205G

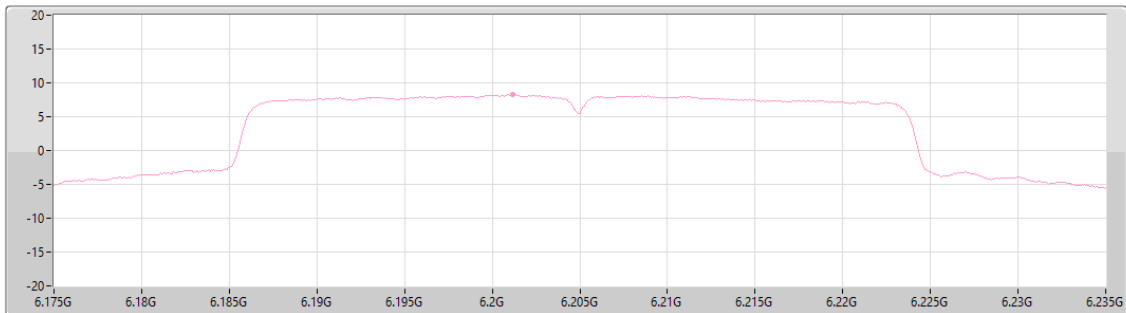
Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
8.07

Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.32	8.32	-	8.32

Port 2

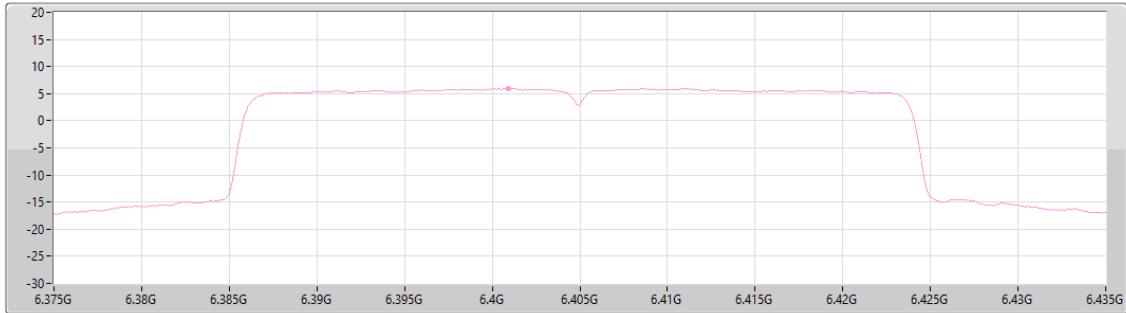
5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6405MHz

02/12/2025

CF (Hz)
6.405G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.07
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.95	5.95	-	5.95

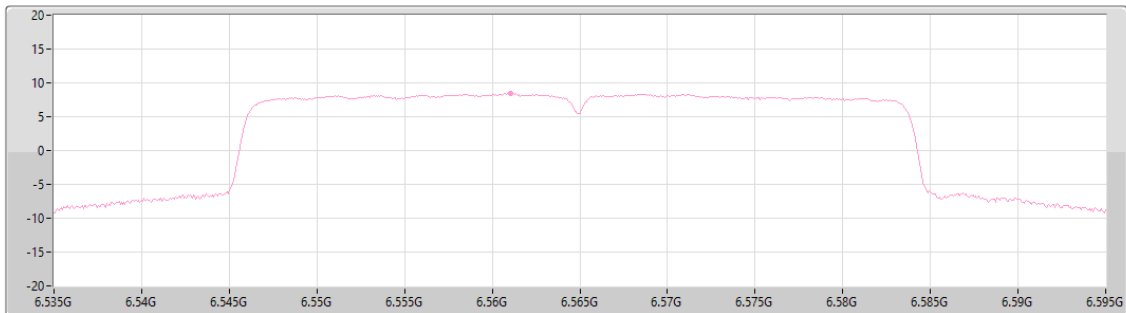
6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6565MHz

01/12/2025

CF (Hz)
6.565G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.07
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.47	8.47	-	8.47

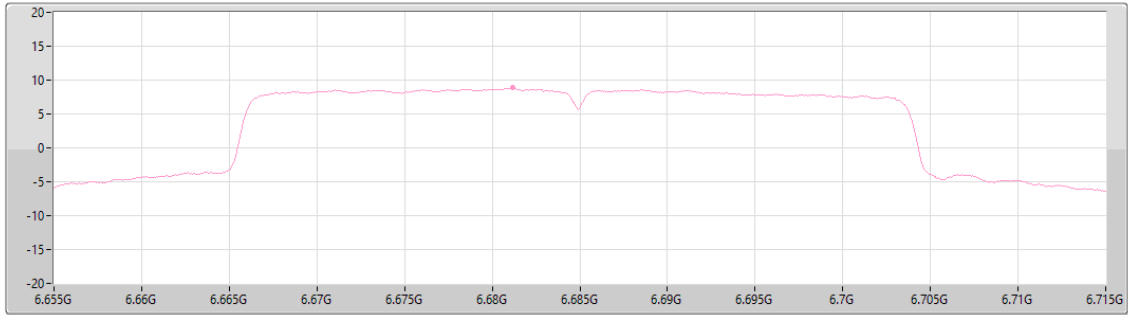
6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6685MHz

01/12/2025

CF (Hz)
6.685G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.07
Detector Type
RMS



Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.86	8.86	-	8.86

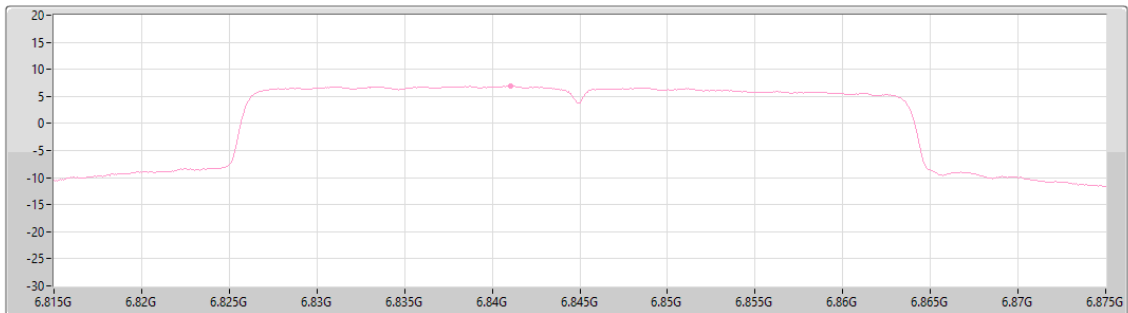
6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6845MHz

02/12/2025

CF (Hz)
6.845G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.07
Detector Type
RMS



Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.96	6.96	-	6.96

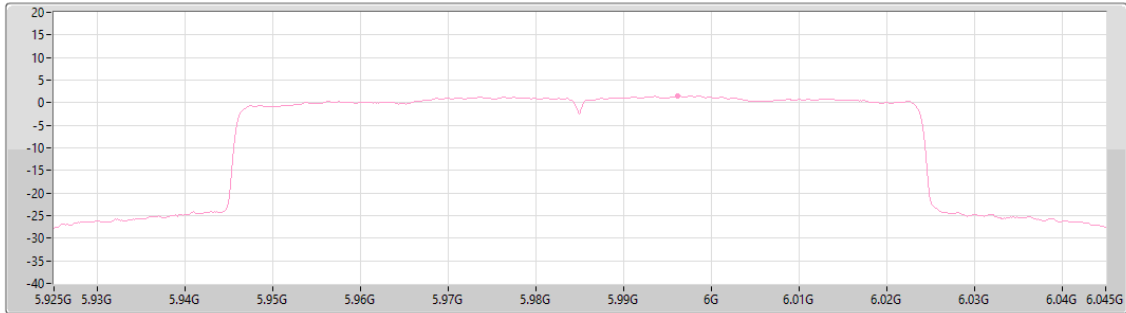
5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5985MHz

01/12/2025

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.348
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.51	1.51	-	1.51

Port 2

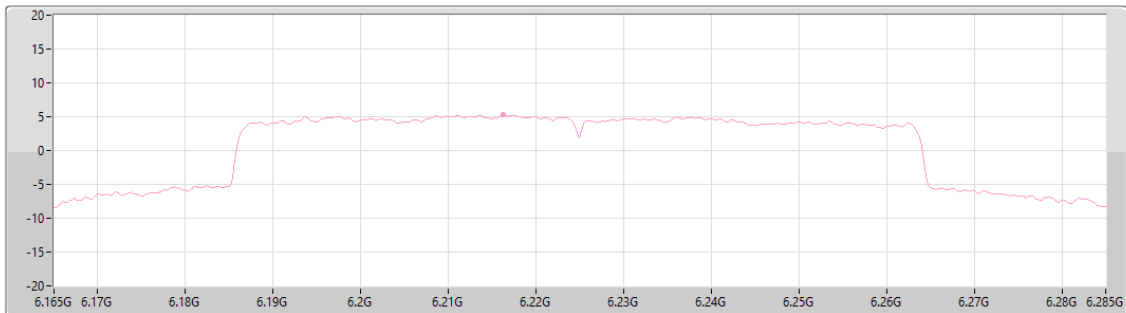
5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6225MHz

01/12/2025

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.348
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.35	5.35	-	5.35

Port 2

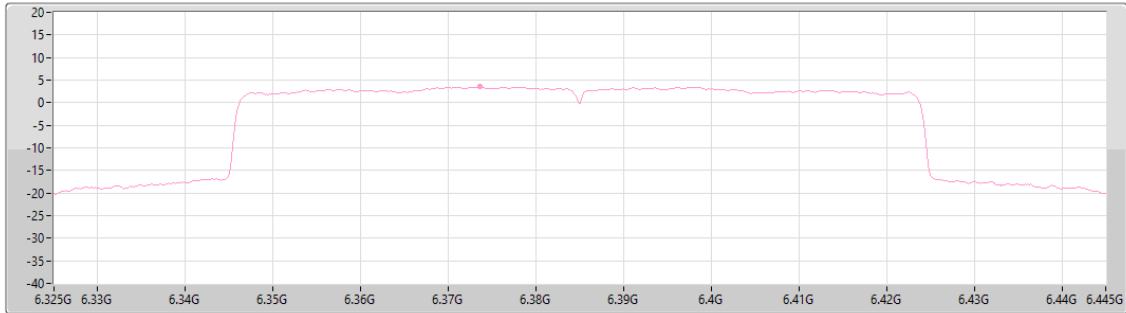
5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6385MHz

03/12/2025

CF (Hz)
6.385G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.348
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.55	3.55	-	3.55

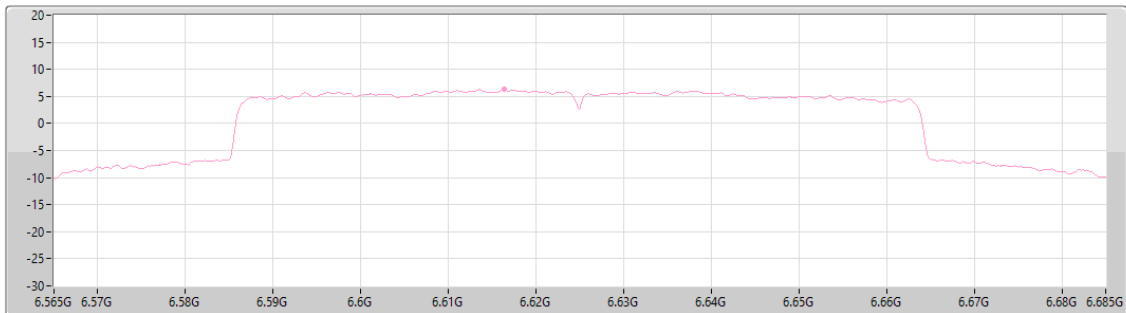
6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6625MHz

01/12/2025

CF (Hz)
6.625G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.348
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.28	6.28	-	6.28

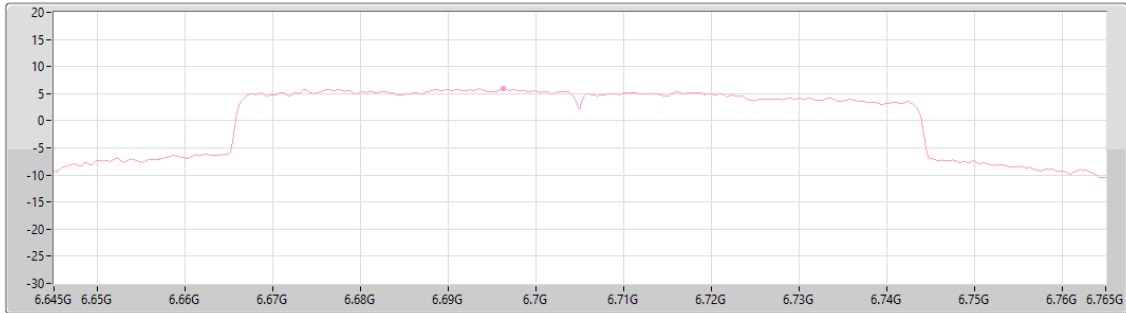
6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6705MHz

01/12/2025

CF (Hz)
6.705G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.348
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.93	5.93	-	5.93

Port 2

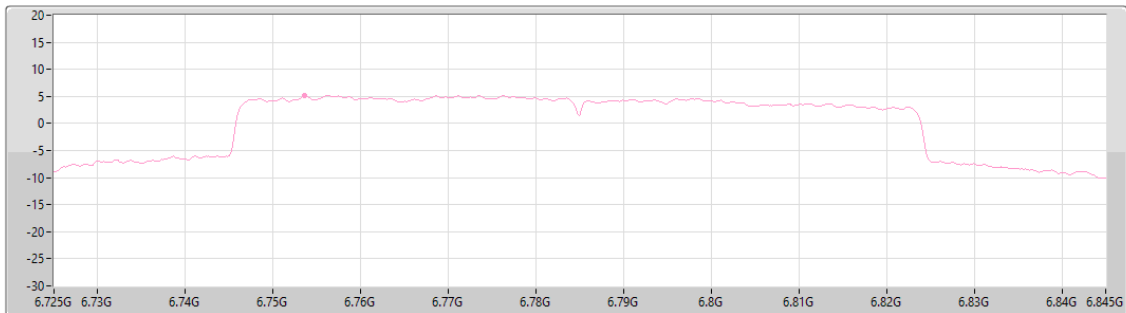
6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6785MHz

01/12/2025

CF (Hz)
6.785G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.348
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.21	5.21	-	5.21

Port 2

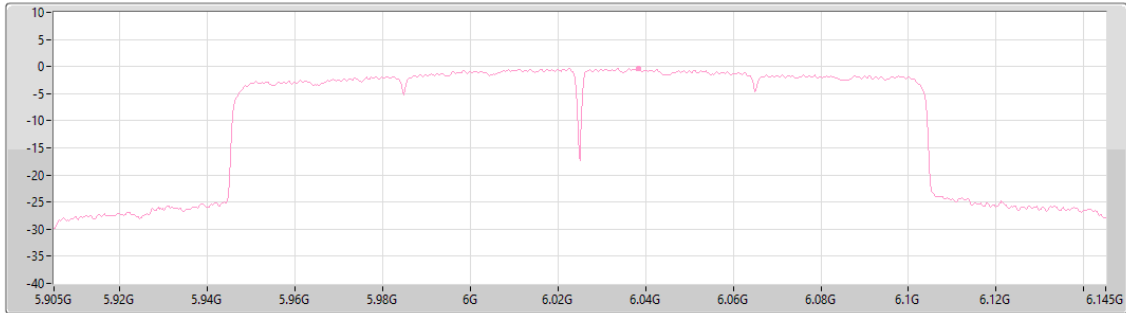
5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6025MHz

01/12/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.627
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.41	-0.41	-	-0.41

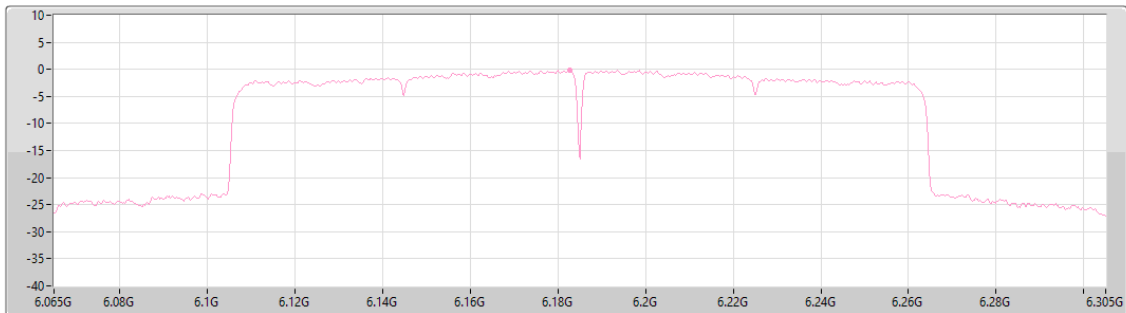
5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6185MHz

01/12/2025

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.627
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.20	-0.20	-	-0.20

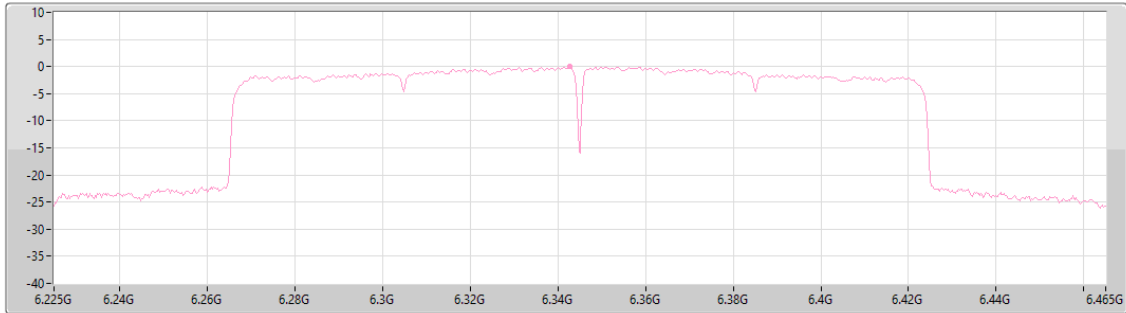
5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6345MHz

01/12/2025

CF (Hz)
6.345G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.627
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.02	-0.02	-	-0.02

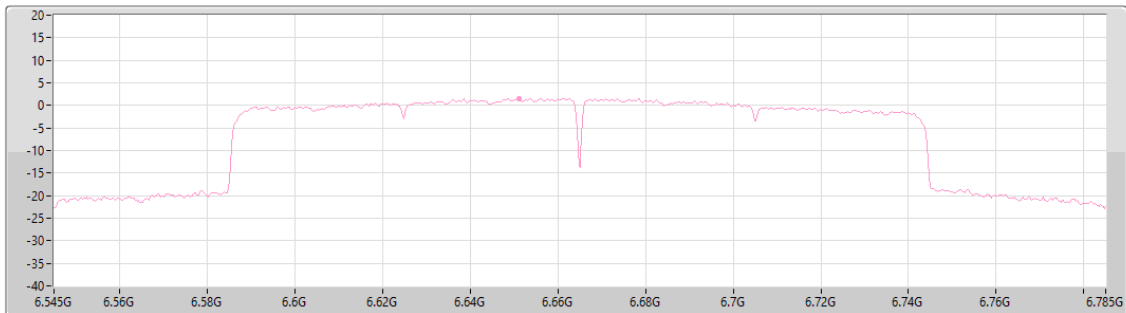
6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6665MHz

01/12/2025

CF (Hz)
6.665G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.627
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.53	1.53	-	1.53

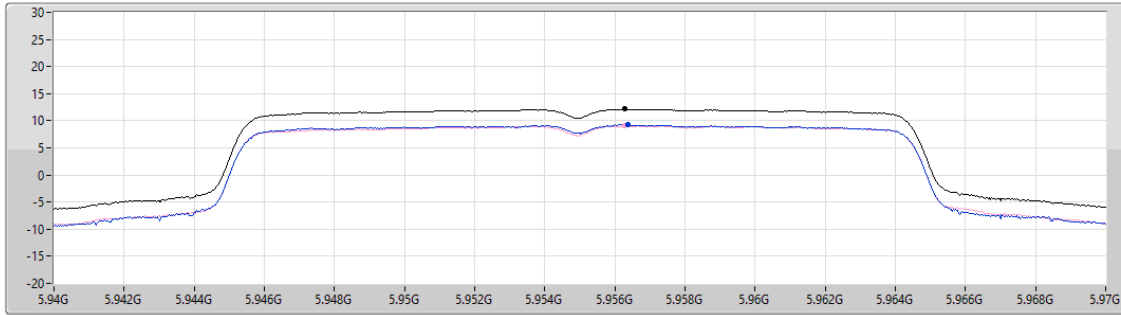
5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

5955MHz

01/12/2025

CF (Hz)
5.955G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.133
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.15	12.15	9.26	9.02

Sum
Port 1
Port 2

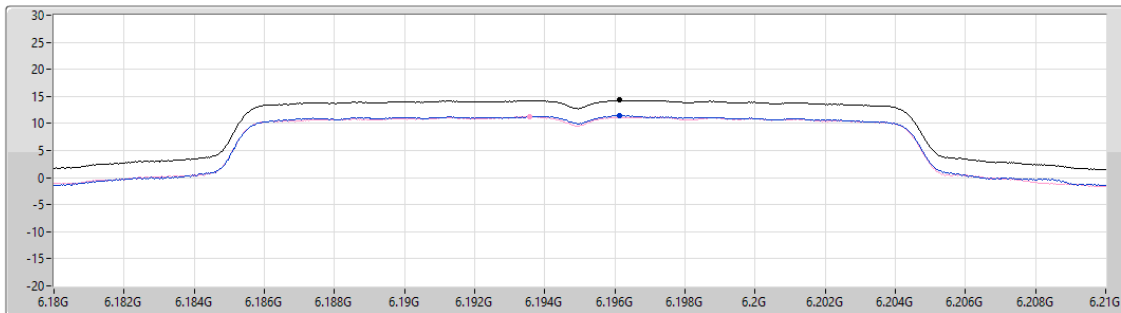
5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

6195MHz

01/12/2025

CF (Hz)
6.195G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.133
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.28	14.28	11.47	11.28

Sum
Port 1
Port 2

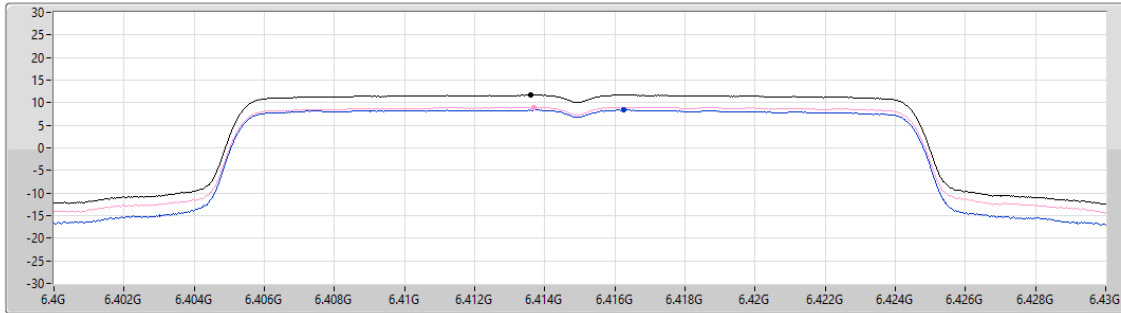
5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

6415MHz

02/12/2025

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.133
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
11.69	11.69	8.38	9.00

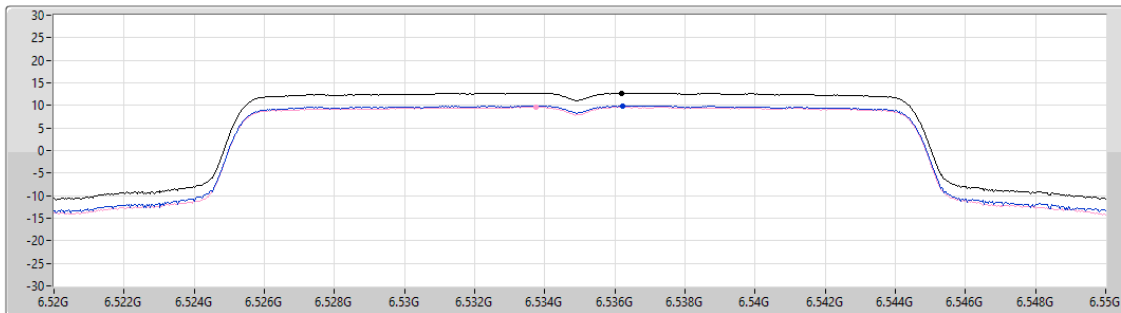
6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

6535MHz

02/12/2025

CF (Hz)
6.535G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.133
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
12.74	12.74	9.93	9.58

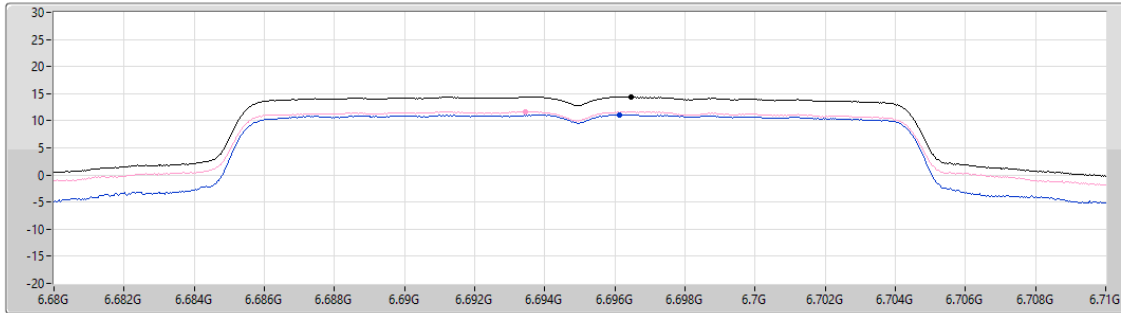
6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

6695MHz

01/12/2025

CF (Hz)
6.695G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.133
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.39	14.39	11.14	11.72

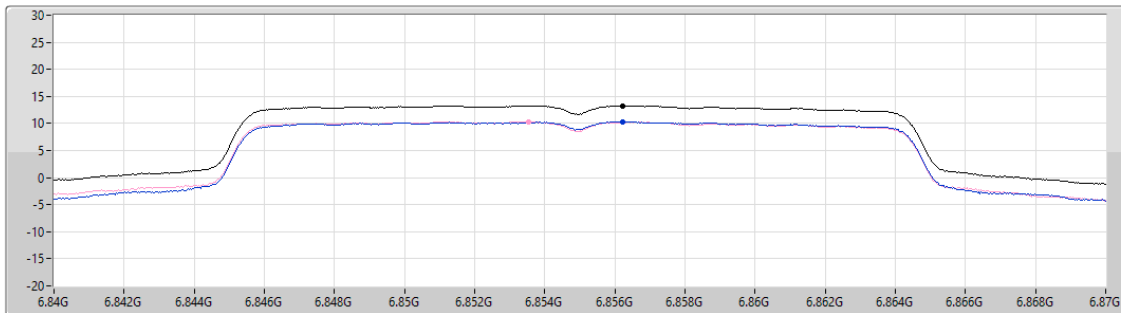
6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

6855MHz

01/12/2025

CF (Hz)
6.855G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
8.133
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.29	13.29	10.37	10.36

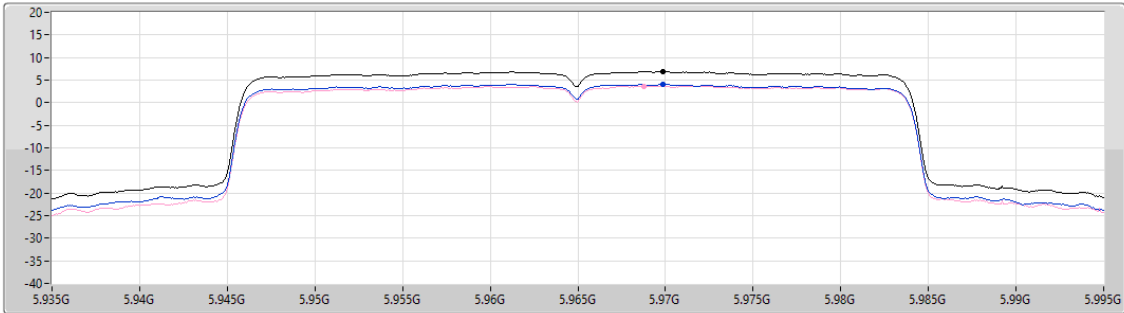
5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

5965MHz

01/12/2025

CF (Hz)
5.965G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.535
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.87	6.87	4.11	3.70

Sum
Port 1
Port 2

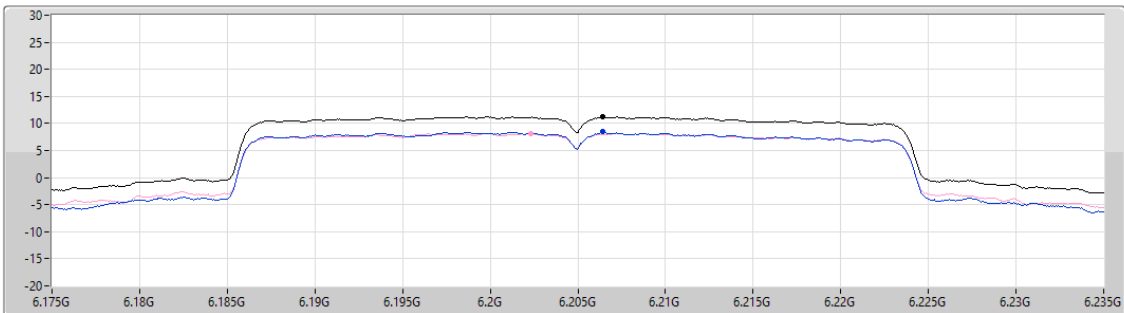
5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

6205MHz

01/12/2025

CF (Hz)
6.205G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.535
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
11.20	11.20	8.42	8.19

Sum
Port 1
Port 2

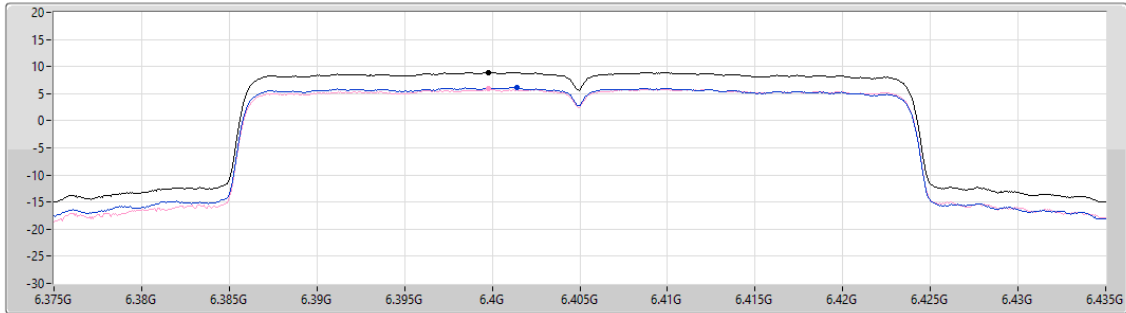
5.925-6.425GHz_802.11ax_HEW40_Nss2,(MCS0)_2TX

PSD

6405MHz

02/12/2025

CF (Hz)
6.405G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.535
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.95	8.95	6.13	5.85

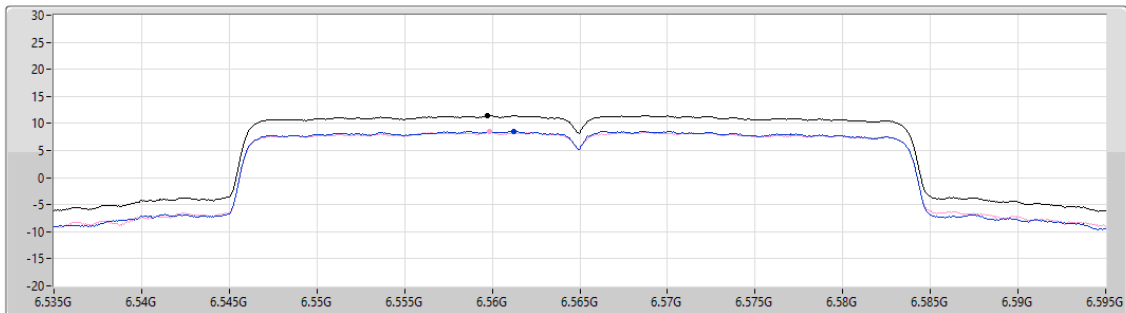
6.525-6.875GHz_802.11ax_HEW40_Nss2,(MCS0)_2TX

PSD

6565MHz

01/12/2025

CF (Hz)
6.565G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.535
Detector Type
RMS



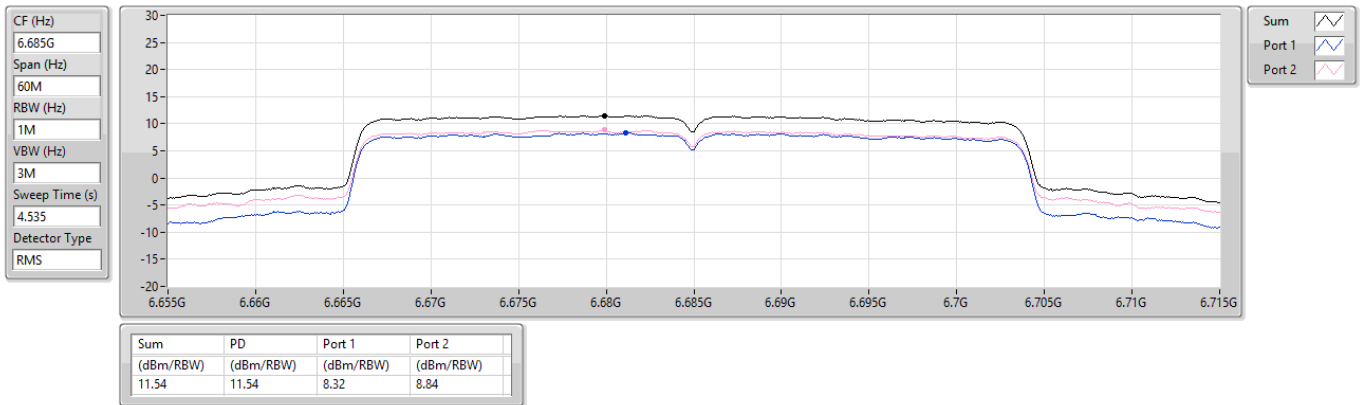
Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
11.41	11.41	8.60	8.42

6.525-6.875GHz_802.11ax_HEW40_Nss2,(MCS0)_2TX

PSD

6685MHz

01/12/2025

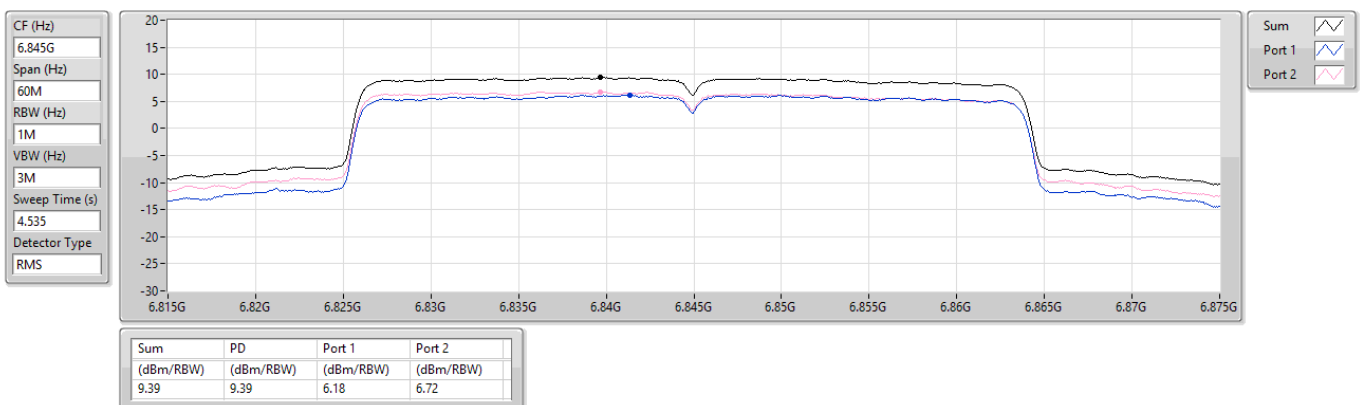


6.525-6.875GHz_802.11ax_HEW40_Nss2,(MCS0)_2TX

PSD

6845MHz

01/12/2025



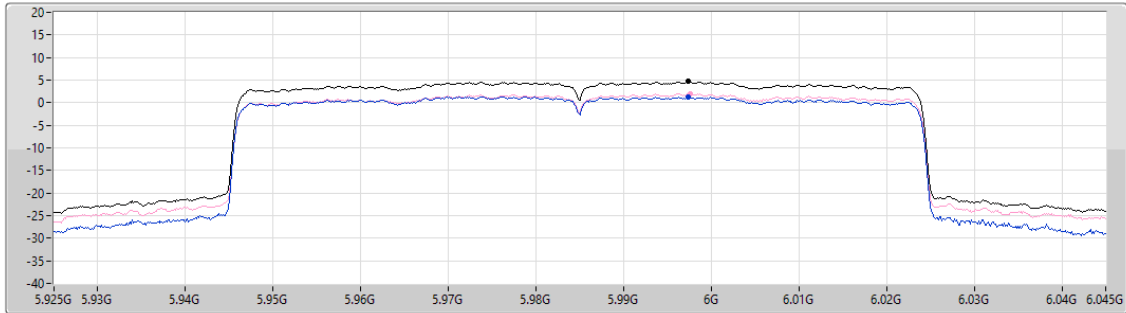
5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

5985MHz

01/12/2025

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.69
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.66	4.66	1.30	1.98

Sum
Port 1
Port 2

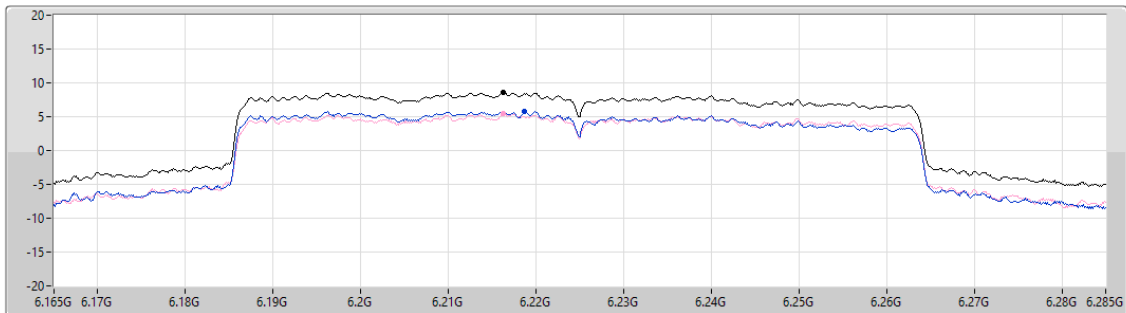
5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

6225MHz

01/12/2025

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.69
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.60	8.60	5.75	5.46

Sum
Port 1
Port 2

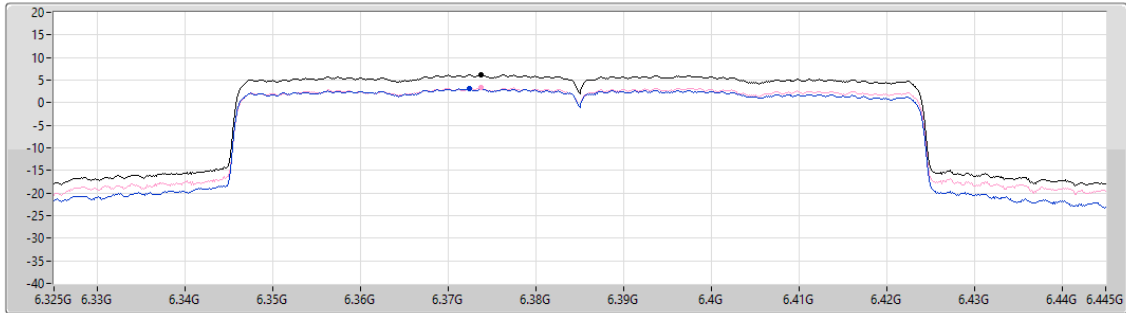
5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

6385MHz

02/12/2025

CF (Hz)
6.385G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.69
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.19	6.19	3.05	3.37

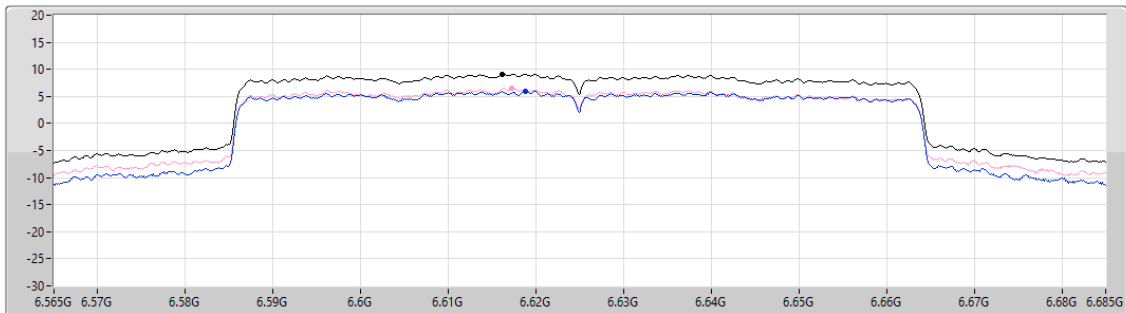
6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

PSD

6625MHz

01/12/2025

CF (Hz)
6.625G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.69
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.13	9.13	6.02	6.47

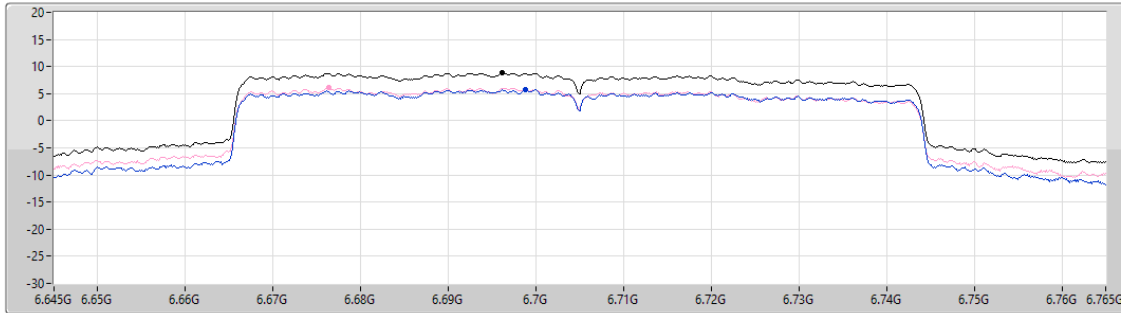
6.525-6.875GHz_802.11ax_HEW80_Nss2,(MCS0)_2TX

PSD

6705MHz

01/12/2025

CF (Hz)
6.705G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.69
Detector Type
RMS



Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
8.84	8.84	5.77	6.05

Sum
Port 1
Port 2

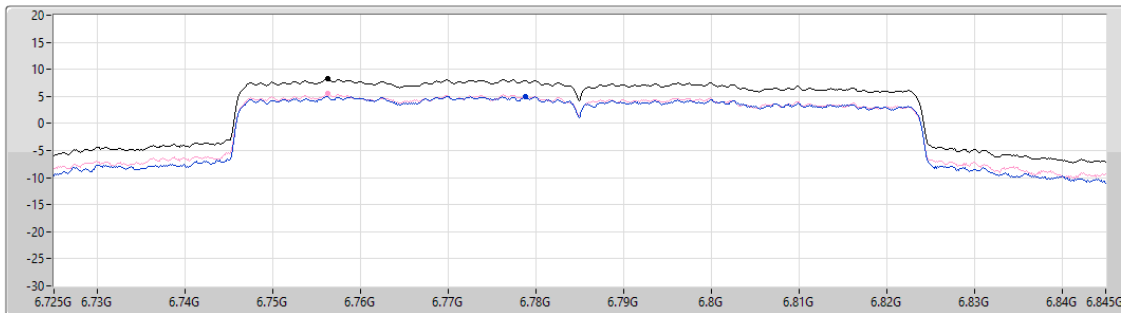
6.525-6.875GHz_802.11ax_HEW80_Nss2,(MCS0)_2TX

PSD

6785MHz

01/12/2025

CF (Hz)
6.785G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.69
Detector Type
RMS



Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
8.19	8.19	4.93	5.46

Sum
Port 1
Port 2

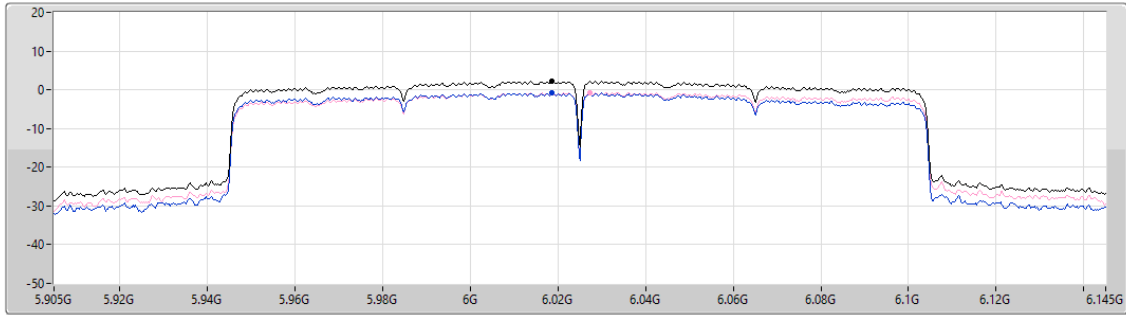
5.925-6.425GHz_802.11ax_HEW160_Nss2,(MCS0)_2TX

PSD

6025MHz

01/12/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
1.876
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.14	2.14	-0.77	-0.70

Sum
Port 1
Port 2

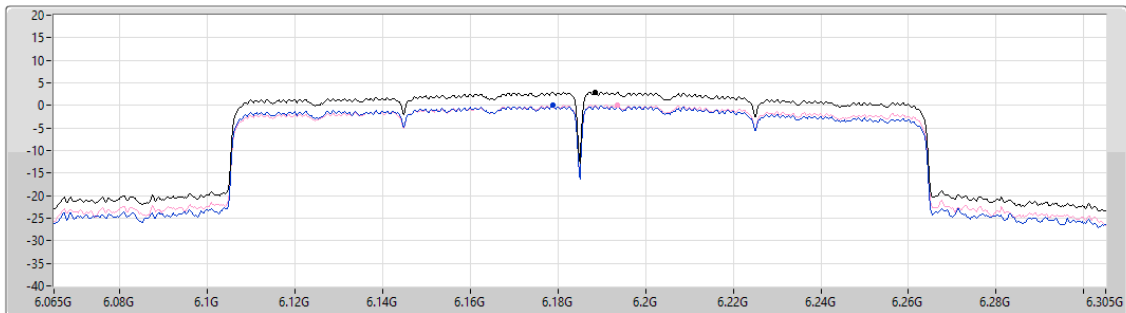
5.925-6.425GHz_802.11ax_HEW160_Nss2,(MCS0)_2TX

PSD

6185MHz

01/12/2025

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
1.876
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.95	2.95	0.01	0.07

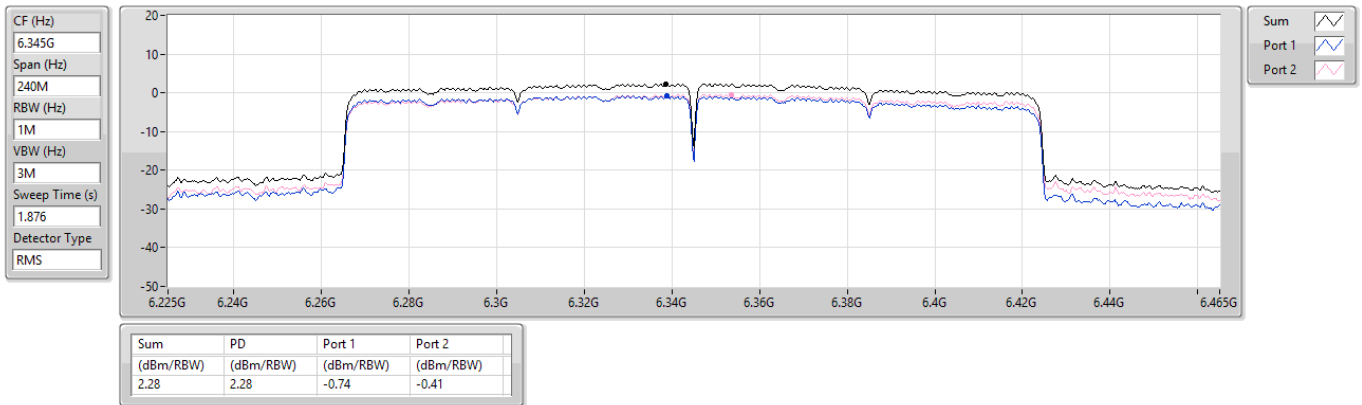
Sum
Port 1
Port 2

5.925-6.425GHz_802.11ax_HEW160_Nss2,(MCS0)_2TX

PSD

6345MHz

01/12/2025

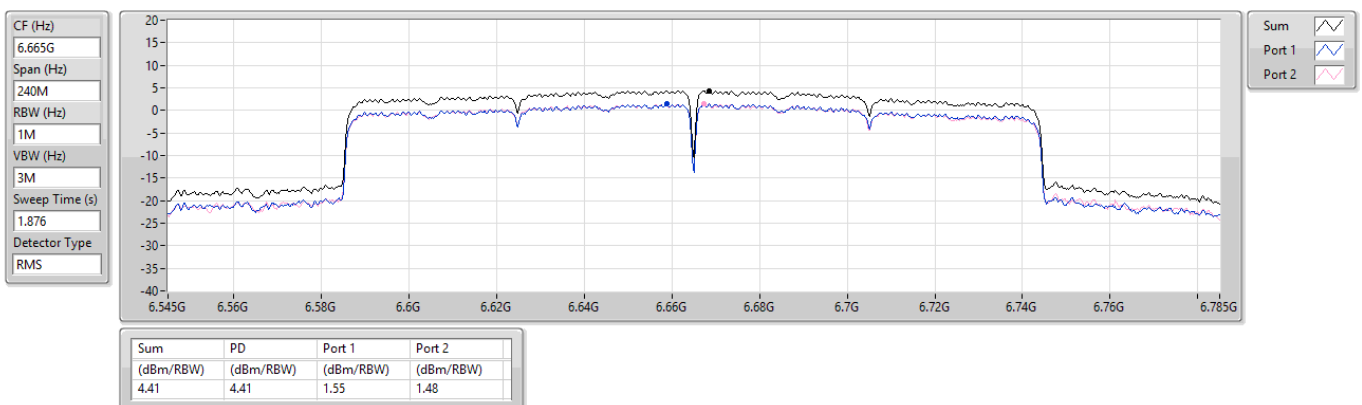


6.525-6.875GHz_802.11ax_HEW160_Nss2,(MCS0)_2TX

PSD

6665MHz

01/12/2025



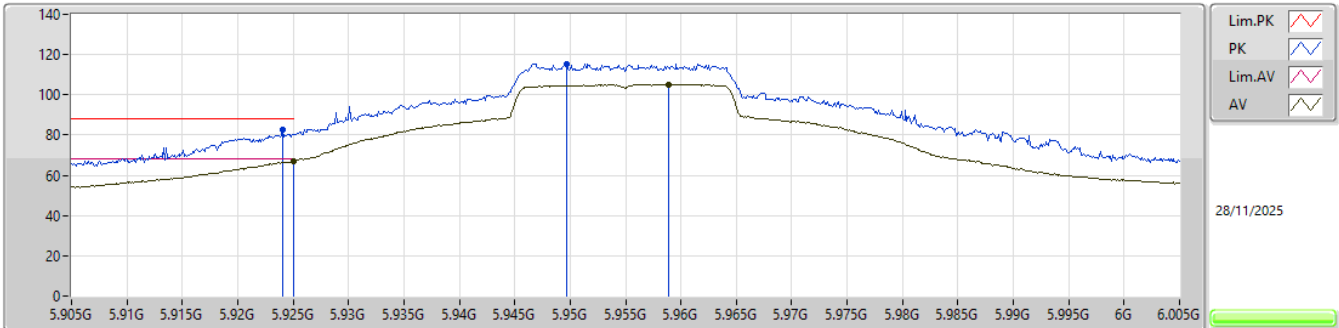


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	Pass	RMS	5.925G	68.14	68.20	-0.06	3	Horizontal	70	2.69	-

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5955MHz_TX

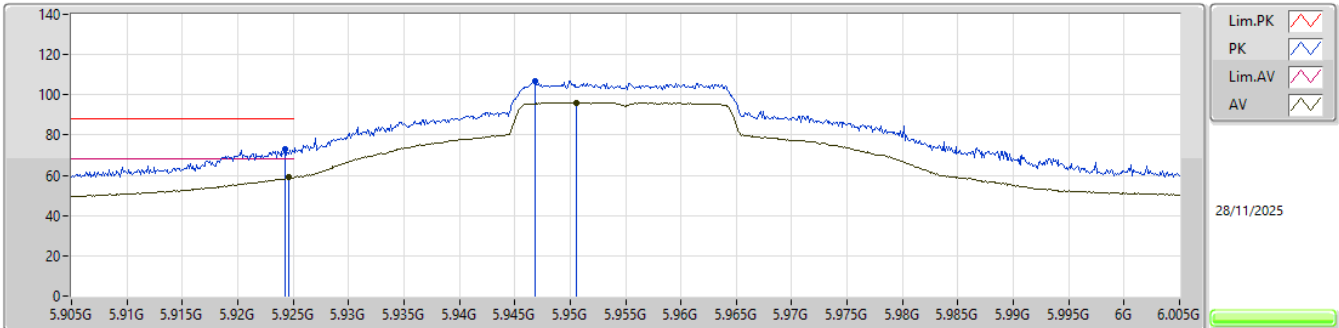


EUT_Z_1TX
SET95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9241G	82.55	88.20	-5.65	76.49	3	Vertical	139	2.77	-	32.25	7.57	33.76			
RMS	5.925G	67.26	68.20	-0.94	61.19	3	Vertical	139	2.77	-	32.25	7.58	33.76			
PK	5.9497G	115.43	Inf	-Inf	109.27	3	Vertical	139	2.77	-	32.30	7.62	33.76			
RMS	5.9589G	105.09	Inf	-Inf	98.88	3	Vertical	139	2.77	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

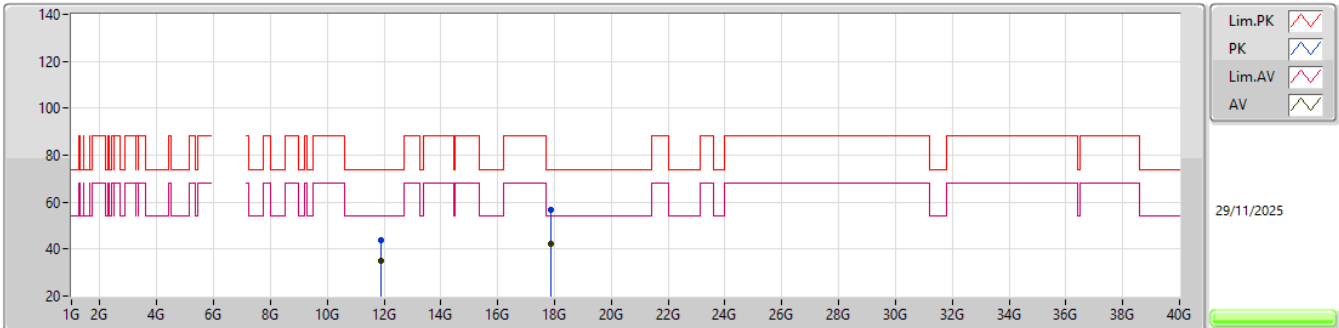
5955MHz_TX

EUT_Z_1TX
SET95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9243G	73.16	88.20	-15.04	67.10	3	Horizontal	247	1.15	-	32.25	7.57	33.76			
RMS	5.9246G	58.90	68.20	-9.30	52.84	3	Horizontal	247	1.15	-	32.25	7.57	33.76			
PK	5.9468G	106.88	Inf	-Inf	100.74	3	Horizontal	247	1.15	-	32.29	7.61	33.76			
RMS	5.9506G	96.05	Inf	-Inf	89.89	3	Horizontal	247	1.15	-	32.30	7.62	33.76			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

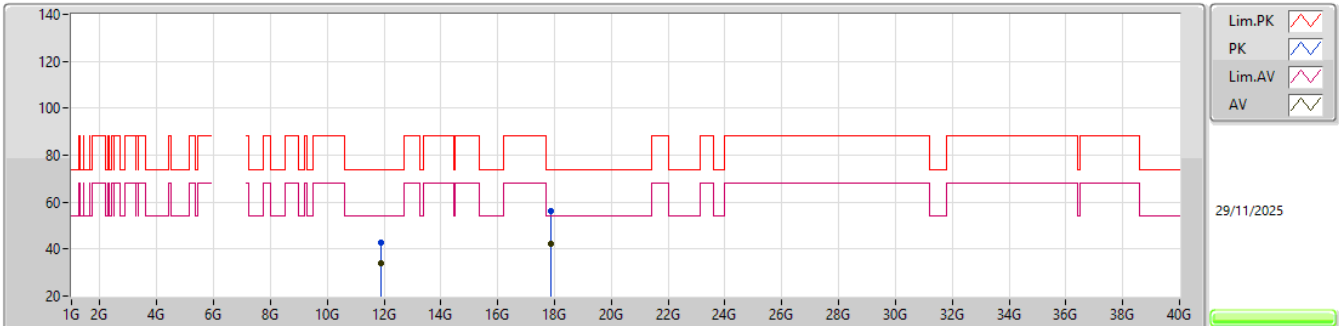
5955MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.90473G	43.71	74.00	-30.29	59.68	3	Vertical	168	2.19	-	38.80	11.07	65.84				
AV	11.90808G	34.87	54.00	-19.13	50.83	3	Vertical	168	2.19	-	38.80	11.07	65.83				
PK	17.86552G	56.72	74.00	-17.28	58.62	3	Vertical	0	1.96	-	47.39	14.73	64.02				
AV	17.87498G	42.43	54.00	-11.57	43.95	3	Vertical	0	1.96	-	47.75	14.74	64.01				

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

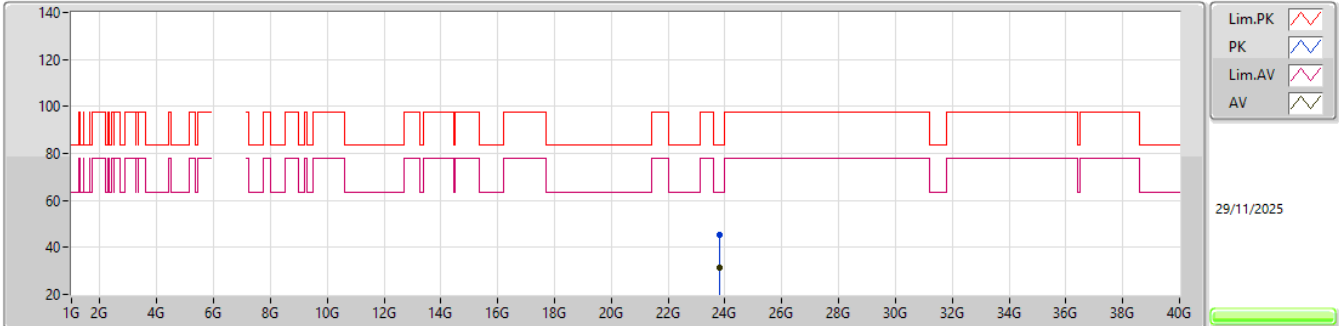
5955MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.91332G	42.75	74.00	-31.25	58.71	3	Horizontal	263.1	1.80	-	38.80	11.07	65.83			
AV	11.90816G	34.09	54.00	-19.91	50.05	3	Horizontal	263.1	1.80	-	38.80	11.07	65.83			
PK	17.86732G	56.19	74.00	-17.81	58.02	3	Horizontal	290	1.57	-	47.46	14.73	64.02			
AV	17.87476G	42.39	54.00	-11.61	43.92	3	Horizontal	290	1.57	-	47.74	14.74	64.01			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5955MHz_TX

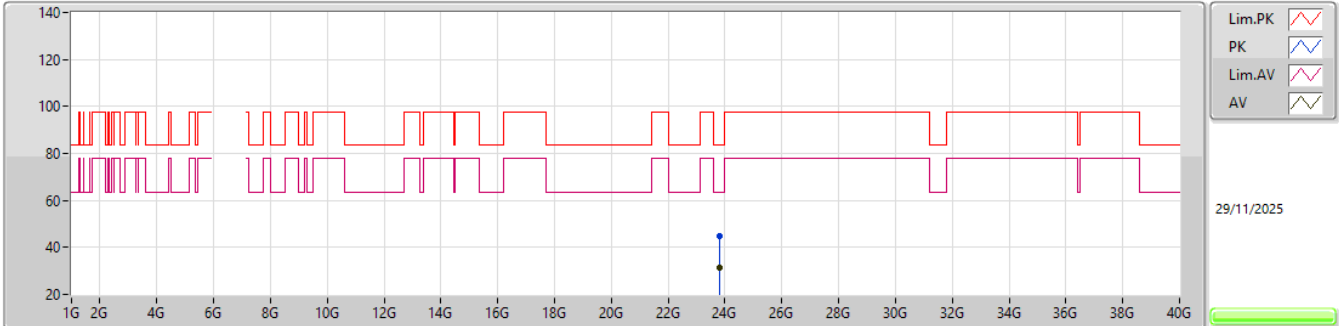


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	23.80695G	45.35	83.54	-38.19	34.97	1	Vertical	0	1.08	-	38.77	18.76	47.15			
AV	23.81838G	31.29	63.54	-32.25	20.94	1	Vertical	0	1.08	-	38.73	18.76	47.14			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

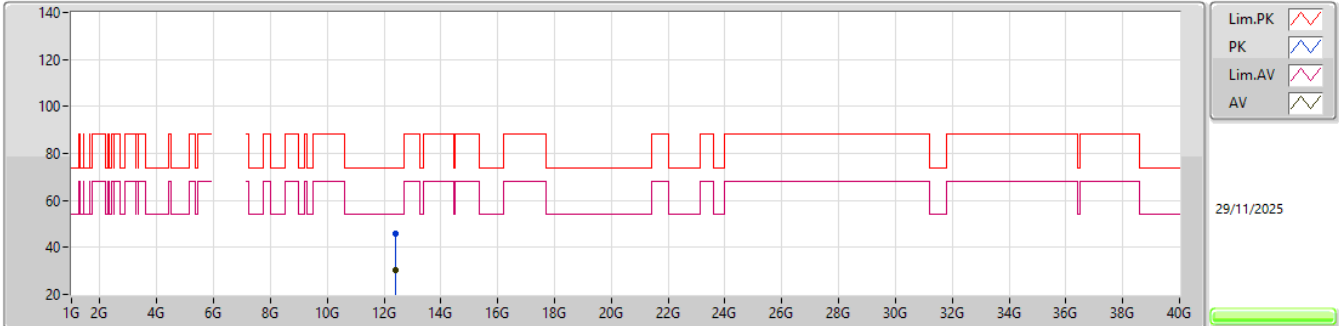
5955MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82075G	44.85	83.54	-38.69	34.51	1	Horizontal	177	2.42	-	38.72	18.76	47.14			
AV	23.81166G	31.25	63.54	-32.29	20.89	1	Horizontal	177	2.42	-	38.75	18.76	47.15			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

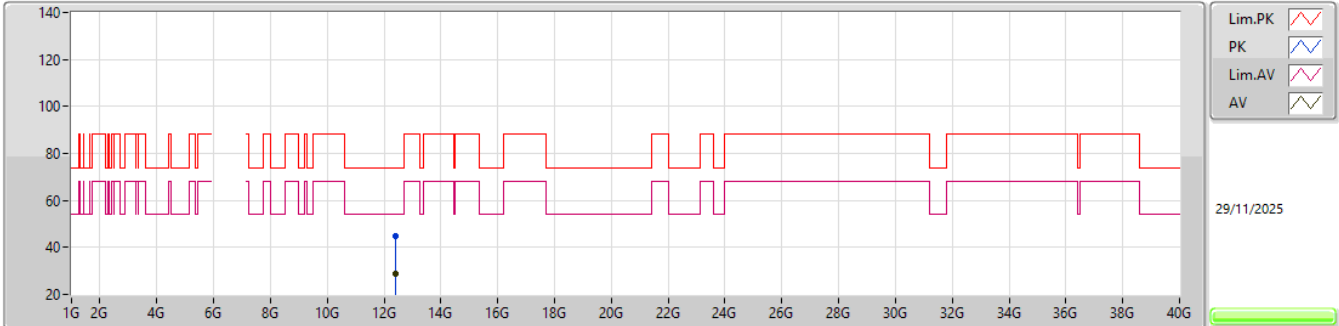
6195MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.394G	45.71	74.00	-28.29	61.28	3	Vertical	197	2.60	-	38.71	11.33	65.61			
AV	12.3896G	30.17	54.00	-23.83	45.73	3	Vertical	197	2.60	-	38.72	11.33	65.61			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

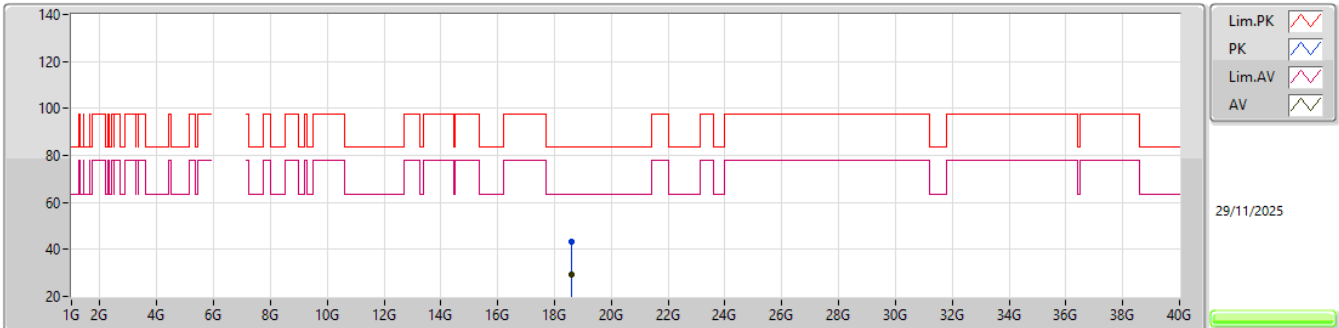
6195MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39731G	44.89	74.00	-29.11	60.45	3	Horizontal	56	1.70	-	38.71	11.34	65.61			
AV	12.40527G	28.69	54.00	-25.31	44.26	3	Horizontal	56	1.70	-	38.69	11.34	65.60			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

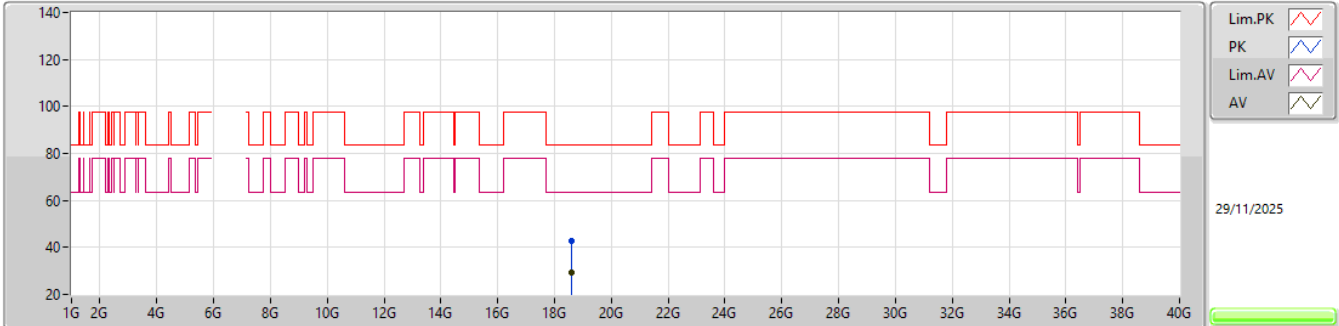
6195MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.59598G	43.48	83.54	-40.06	38.85	1	Vertical	238	2.20	-	37.69	16.58	49.64			
AV	18.59334G	29.31	63.54	-34.23	24.68	1	Vertical	238	2.20	-	37.69	16.58	49.64			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6195MHz_TX

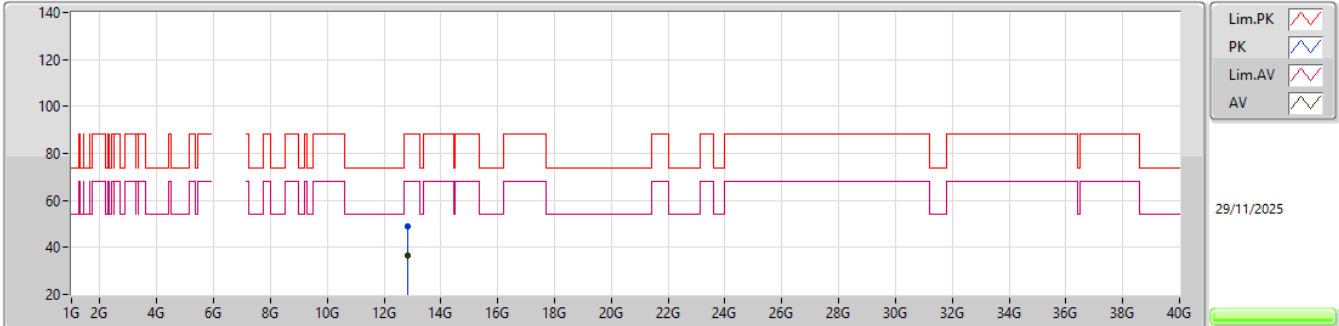


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58689G	42.66	83.54	-40.88	38.06	1	Horizontal	310	1.40	-	37.67	16.58	49.65			
AV	18.58911G	29.27	63.54	-34.27	24.66	1	Horizontal	310	1.40	-	37.68	16.58	49.65			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6415MHz_TX

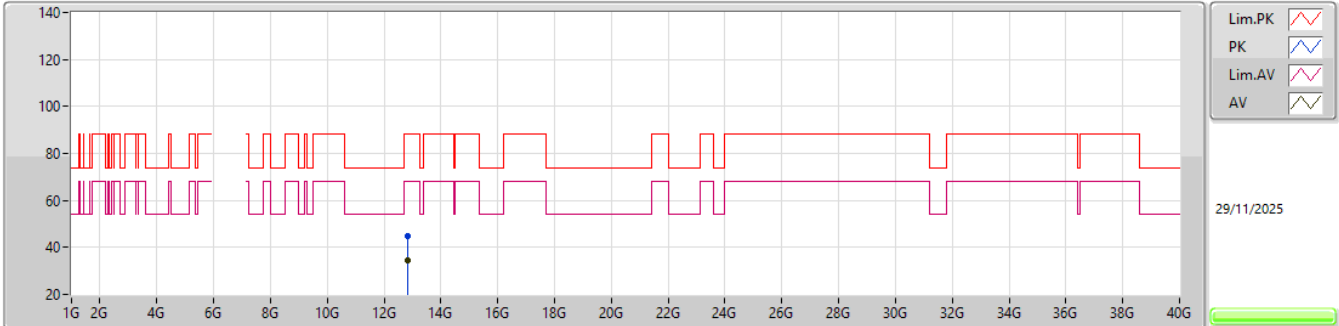


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82568G	49.06	88.20	-39.14	63.13	3	Vertical	74	2.11	-	39.45	11.60	65.12			
RMS	12.82844G	36.33	68.20	-31.87	50.39	3	Vertical	74	2.11	-	39.46	11.60	65.12			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6415MHz_TX

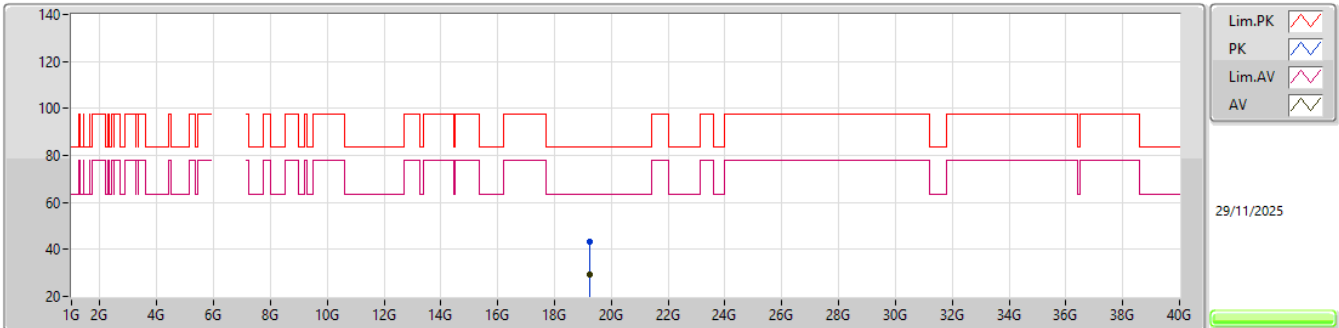


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.82632G	44.57	88.20	-43.63	58.64	3	Horizontal	222	2.04	-	39.45	11.60	65.12			
RMS	12.82932G	34.59	68.20	-33.61	48.65	3	Horizontal	222	2.04	-	39.46	11.60	65.12			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

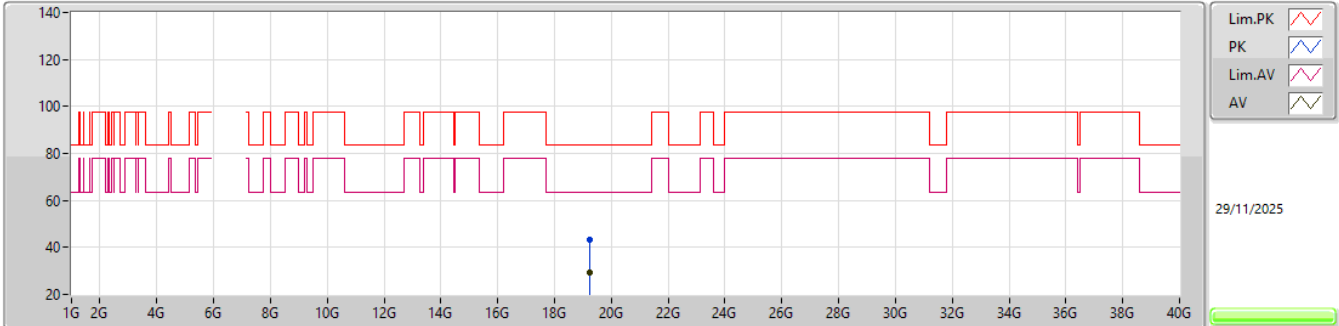
6415MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2303G	43.21	83.54	-40.33	37.91	1	Vertical	166	1.19	-	37.82	16.92	49.44			
AV	19.24959G	29.42	63.54	-34.12	24.04	1	Vertical	166	1.19	-	37.90	16.93	49.45			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6415MHz_TX

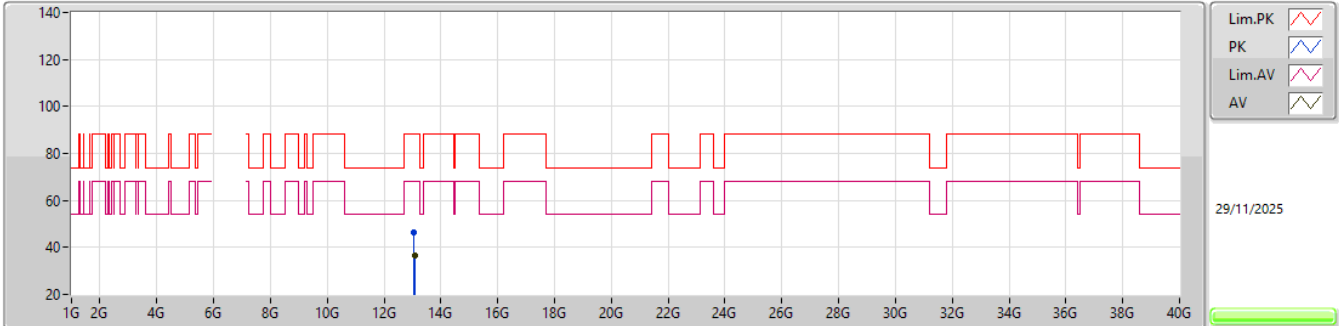


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.23966G	43.46	83.54	-40.08	38.12	1	Horizontal	314	1.31	-	37.86	16.93	49.45			
AV	19.25763G	29.39	63.54	-34.15	24.04	1	Horizontal	314	1.31	-	37.87	16.94	49.46			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6535MHz_TX

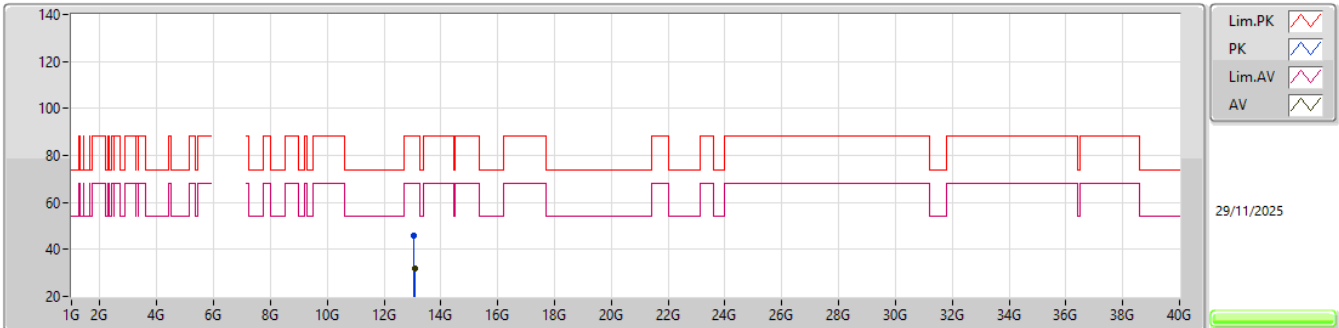


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06173G	46.14	88.20	-42.06	59.96	3	Vertical	76.1	1.80	-	39.30	11.75	64.87			
RMS	13.0688G	36.80	68.20	-31.40	50.62	3	Vertical	76.1	1.80	-	39.30	11.75	64.87			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

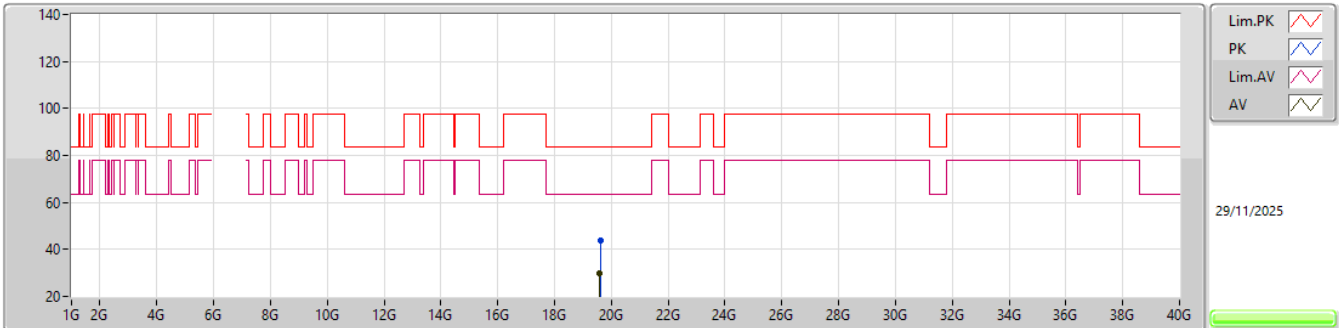
6535MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.06668G	45.90	88.20	-42.30	59.72	3	Horizontal	224	2.06	-	39.30	11.75	64.87			
RMS	13.06856G	31.84	68.20	-36.36	45.66	3	Horizontal	224	2.06	-	39.30	11.75	64.87			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

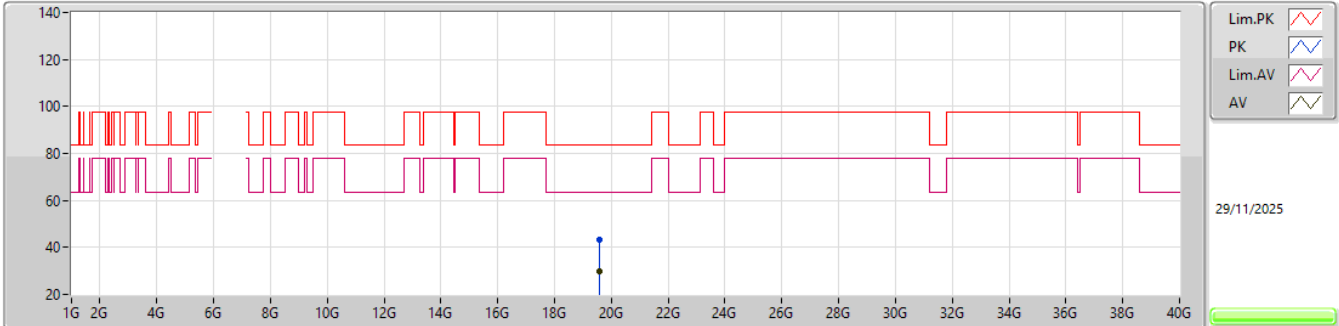
6535MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.60371G	43.98	83.54	-39.56	38.68	1	Vertical	281	2.08	-	37.69	17.14	49.53			
AV	19.59633G	29.99	63.54	-33.55	24.68	1	Vertical	281	2.08	-	37.70	17.14	49.53			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

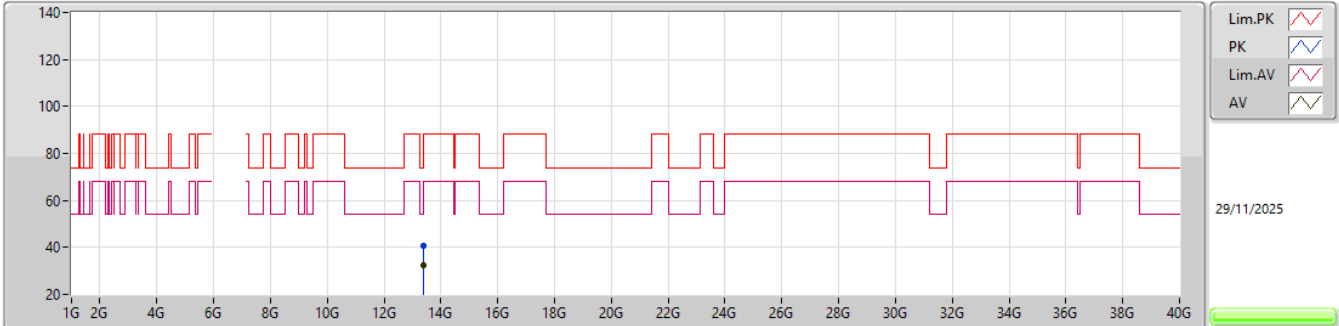
6535MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.59516G	43.44	83.54	-40.10	38.14	1	Horizontal	162	2.31	-	37.70	17.14	49.54			
AV	19.59627G	30.02	63.54	-33.52	24.71	1	Horizontal	162	2.31	-	37.70	17.14	49.53			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6695MHz_TX

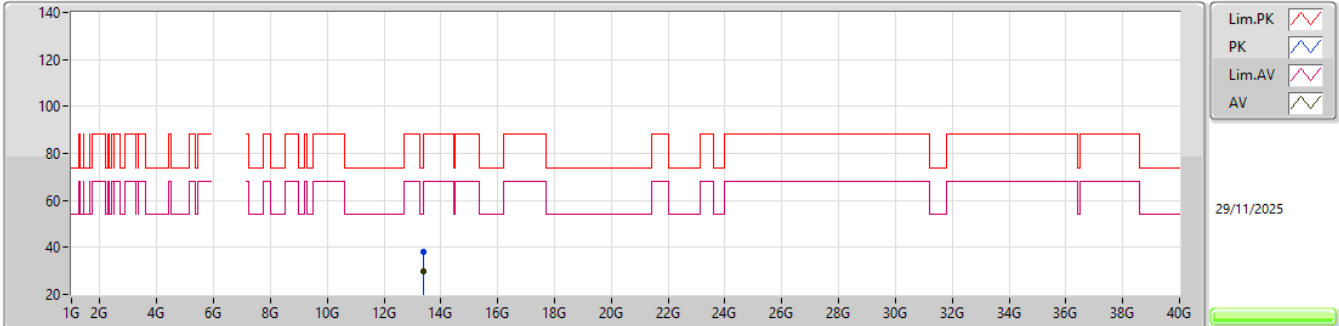


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.38001G	40.92	74.00	-33.08	53.75	3	Vertical	193	1.98	-	40.06	11.95	64.84			
AV	13.38632G	32.66	54.00	-21.34	45.48	3	Vertical	193	1.98	-	40.07	11.95	64.84			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6695MHz_TX

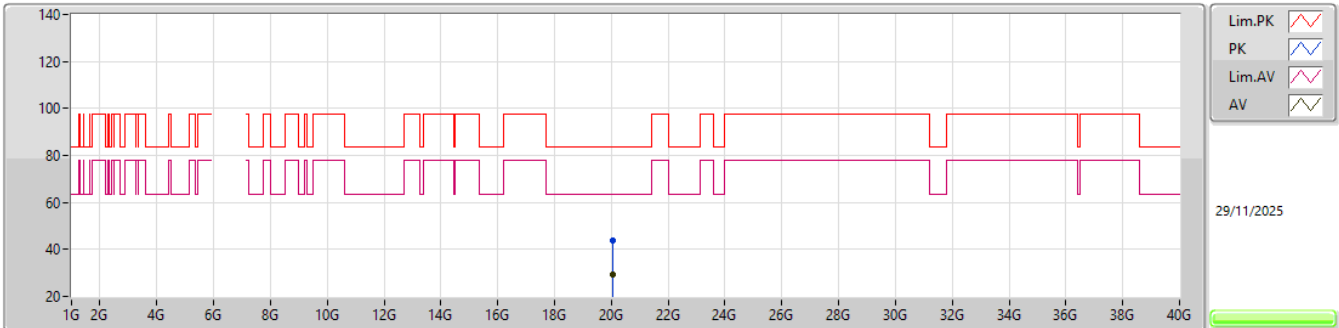


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.38568G	37.97	74.00	-36.03	50.79	3	Horizontal	219	2.06	-	40.07	11.95	64.84			
AV	13.38972G	29.80	54.00	-24.20	42.61	3	Horizontal	219	2.06	-	40.08	11.95	64.84			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

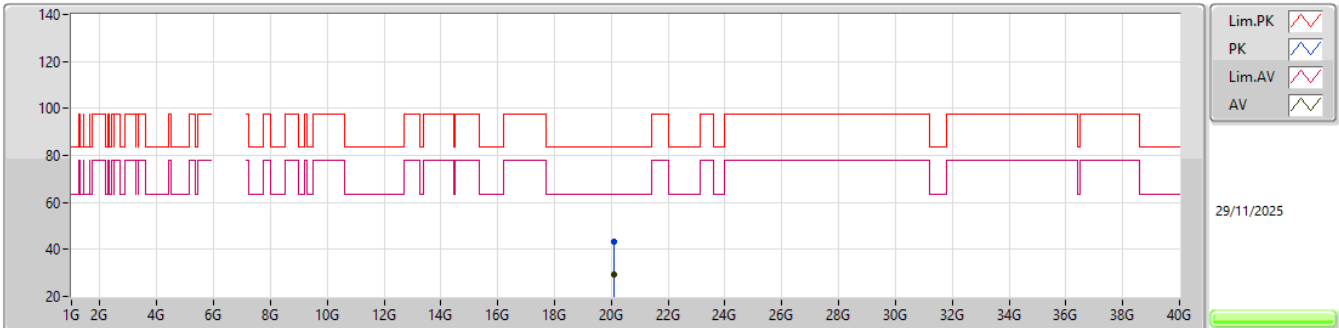
6695MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.07018G	44.02	83.54	-39.52	38.26	1	Vertical	330	1.04	-	37.64	17.38	49.26			
AV	20.07078G	29.49	63.54	-34.05	23.73	1	Vertical	330	1.04	-	37.64	17.38	49.26			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

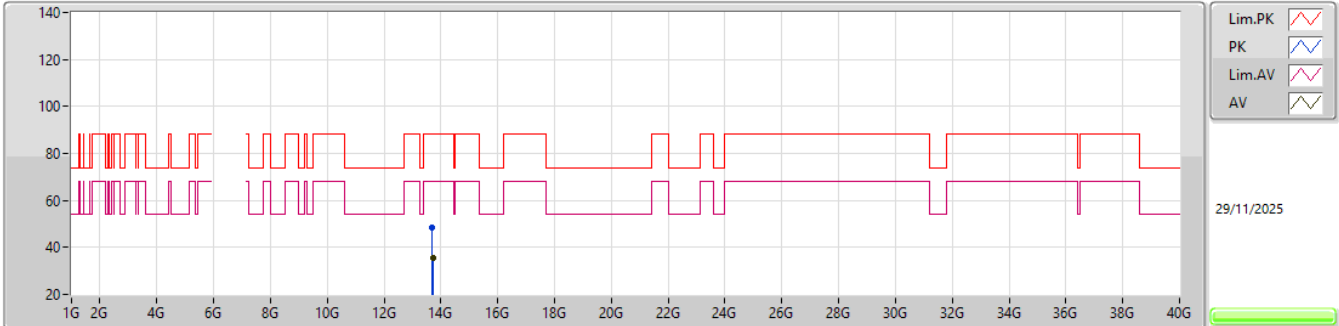
6695MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0778G	43.04	83.54	-40.50	37.26	1	Horizontal	324	2.51	-	37.66	17.38	49.26			
AV	20.08074G	29.50	63.54	-34.04	23.72	1	Horizontal	324	2.51	-	37.66	17.38	49.26			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6855MHz_TX

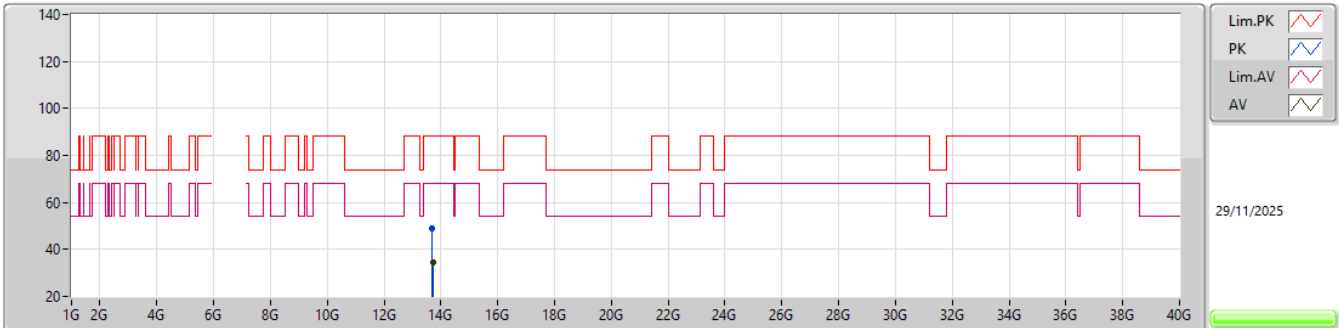


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.70608G	48.33	88.20	-39.87	60.72	3	Vertical	199	2.44	-	40.20	12.15	64.74			
RMS	13.70988G	35.76	68.20	-32.44	48.14	3	Vertical	199	2.44	-	40.20	12.15	64.73			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

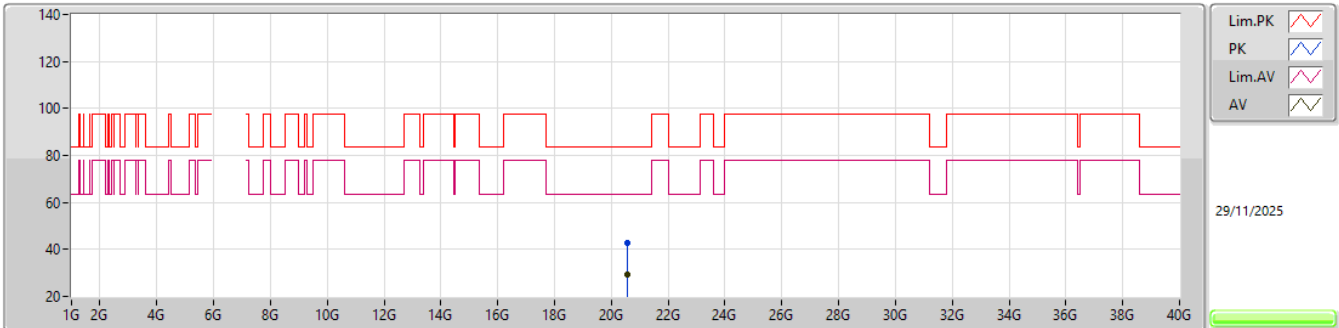
6855MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.70604G	48.91	88.20	-39.29	61.30	3	Horizontal	218	2.05	-	40.20	12.15	64.74			
RMS	13.70912G	34.60	68.20	-33.60	46.98	3	Horizontal	218	2.05	-	40.20	12.15	64.73			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

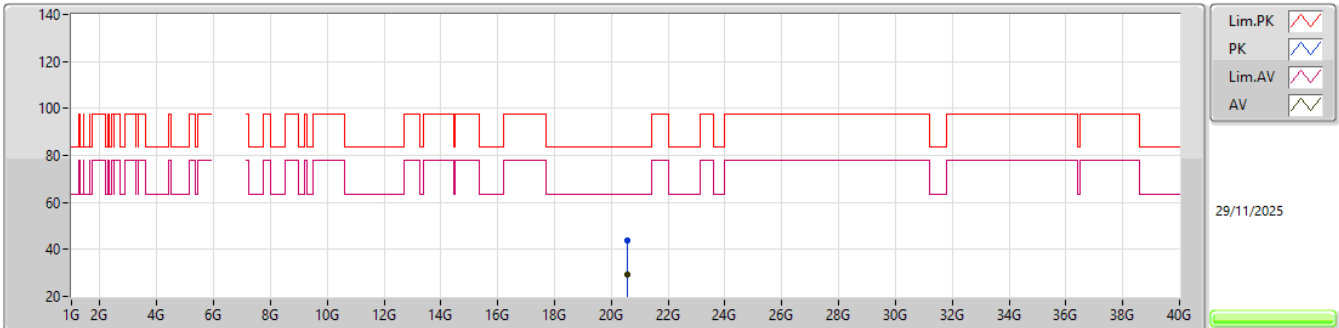
6855MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.55792G	42.68	83.54	-40.86	36.71	1	Vertical	100	1.42	-	37.72	17.45	49.20			
AV	20.55774G	29.25	63.54	-34.29	23.28	1	Vertical	100	1.42	-	37.72	17.45	49.20			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

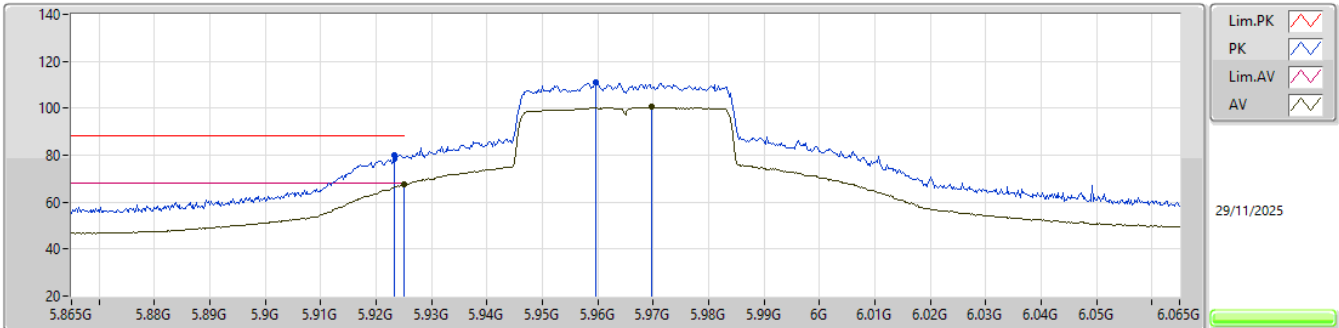
6855MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.55495G	43.87	83.54	-39.67	37.91	1	Horizontal	189	2.93	-	37.71	17.45	49.20			
AV	20.56218G	29.25	63.54	-34.29	23.28	1	Horizontal	189	2.93	-	37.72	17.45	49.20			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

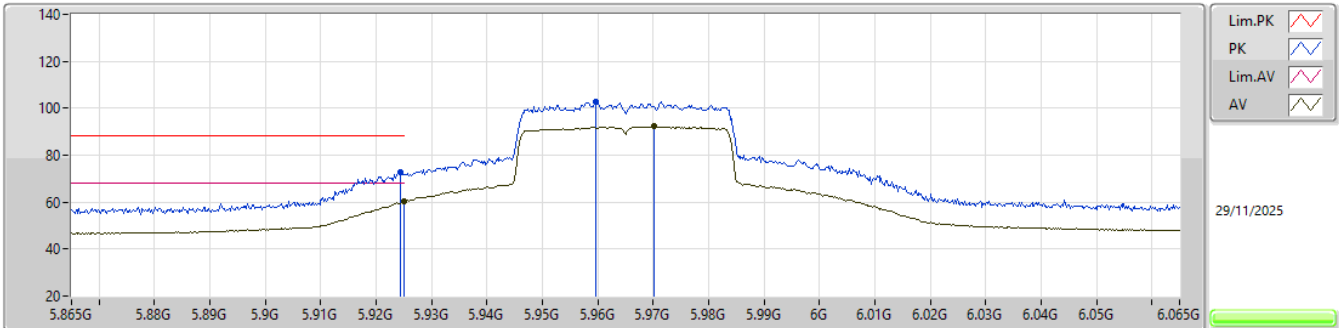
5965MHz_TX

EUT_Z_1TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9232G	80.11	88.20	-8.09	74.05	3	Vertical	141	2.31	-	32.25	7.57	33.76			
RMS	5.925G	67.52	68.20	-0.68	61.45	3	Vertical	141	2.31	-	32.25	7.58	33.76			
PK	5.9596G	110.96	Inf	-Inf	104.75	3	Vertical	141	2.31	-	32.32	7.64	33.75			
RMS	5.9698G	100.51	Inf	-Inf	94.26	3	Vertical	141	2.31	-	32.34	7.66	33.75			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

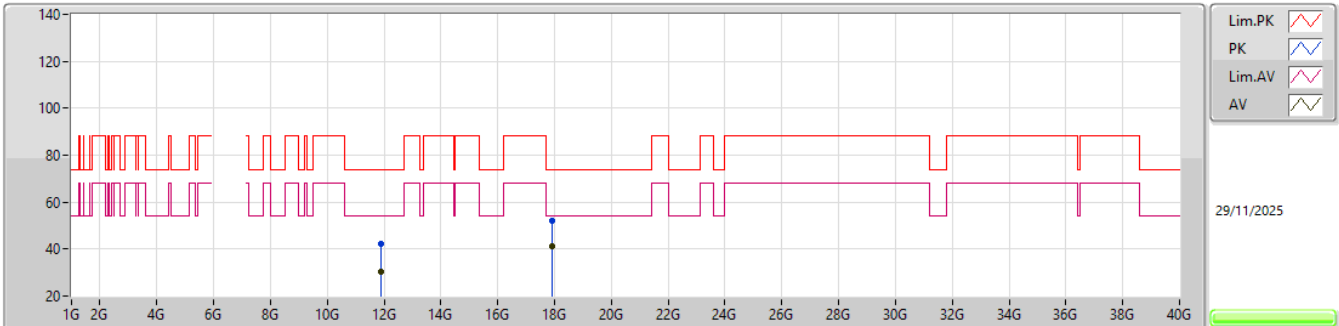
5965MHz_TX

EUT_Z_1TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9244G	72.66	88.20	-15.54	66.60	3	Horizontal	261	1.05	-	32.25	7.57	33.76			
RMS	5.925G	60.11	68.20	-8.09	54.04	3	Horizontal	261	1.05	-	32.25	7.58	33.76			
PK	5.9596G	102.71	Inf	-Inf	96.50	3	Horizontal	261	1.05	-	32.32	7.64	33.75			
RMS	5.9702G	92.18	Inf	-Inf	85.93	3	Horizontal	261	1.05	-	32.34	7.66	33.75			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

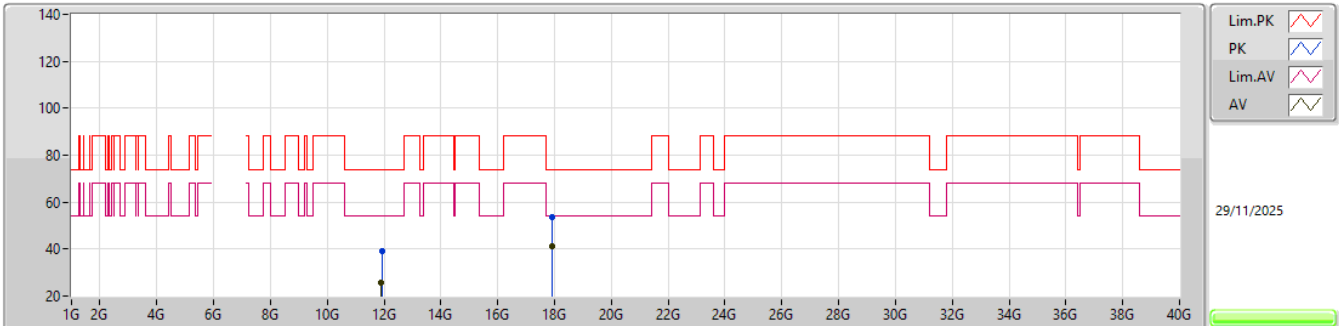
5965MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.90251G	42.47	74.00	-31.53	58.44	3	Vertical	74	1.80	-	38.80	11.07	65.84			
AV	11.90674G	30.16	54.00	-23.84	46.12	3	Vertical	74	1.80	-	38.80	11.07	65.83			
PK	17.9043G	51.89	74.00	-22.11	52.24	3	Vertical	20	2.45	-	48.89	14.75	63.99			
AV	17.91G	41.10	54.00	-12.90	41.20	3	Vertical	20	2.45	-	49.14	14.75	63.99			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

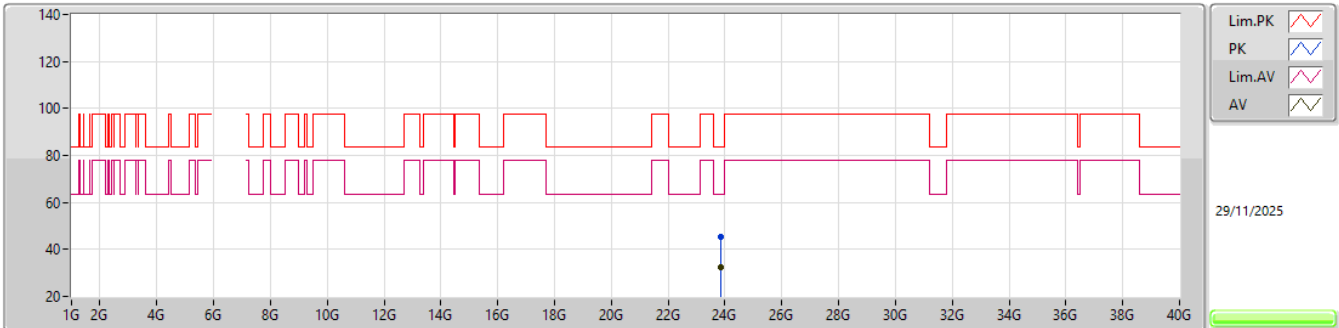
5965MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92089G	39.12	74.00	-34.88	55.07	3	Horizontal	360.1	1.80	-	38.80	11.07	65.82			
AV	11.9057G	25.91	54.00	-28.09	41.87	3	Horizontal	360.1	1.80	-	38.80	11.07	65.83			
PK	17.90763G	53.72	74.00	-20.28	53.92	3	Horizontal	58	1.71	-	49.04	14.75	63.99			
AV	17.90808G	41.18	54.00	-12.82	41.36	3	Horizontal	58	1.71	-	49.06	14.75	63.99			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

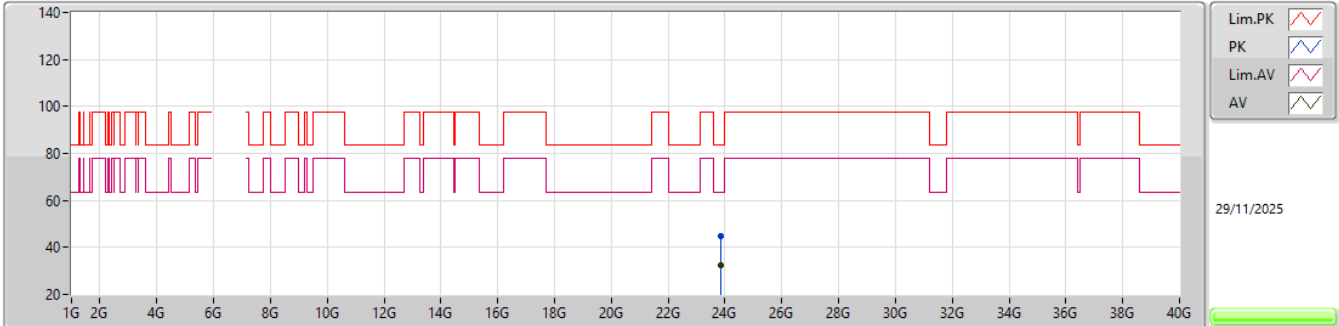
5965MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	23.85193G	45.19	83.54	-38.35	34.96	1	Vertical	22	2.91	-	38.60	18.76	47.13			
AV	23.85577G	32.56	63.54	-30.98	22.32	1	Vertical	22	2.91	-	38.61	18.76	47.13			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

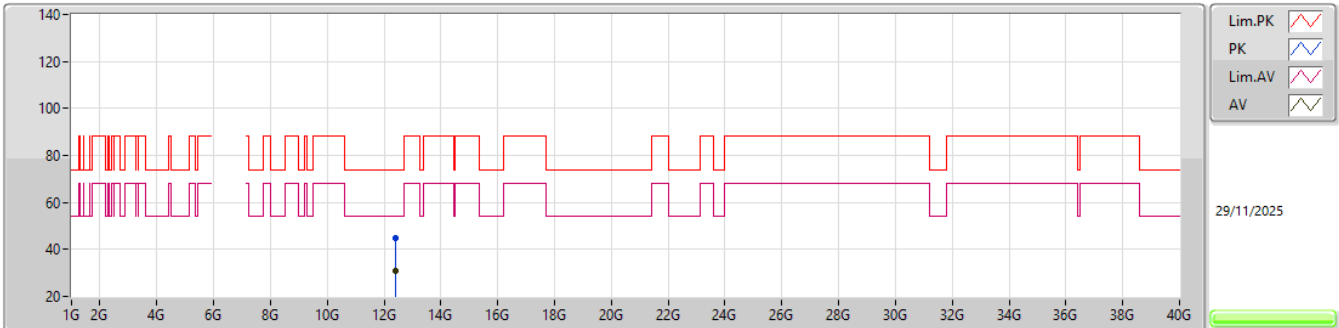
5965MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.87023G	45.03	83.54	-38.51	34.75	1	Horizontal	263	2.57	-	38.64	18.76	47.12			
AV	23.85469G	32.47	63.54	-31.07	22.23	1	Horizontal	263	2.57	-	38.61	18.76	47.13			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

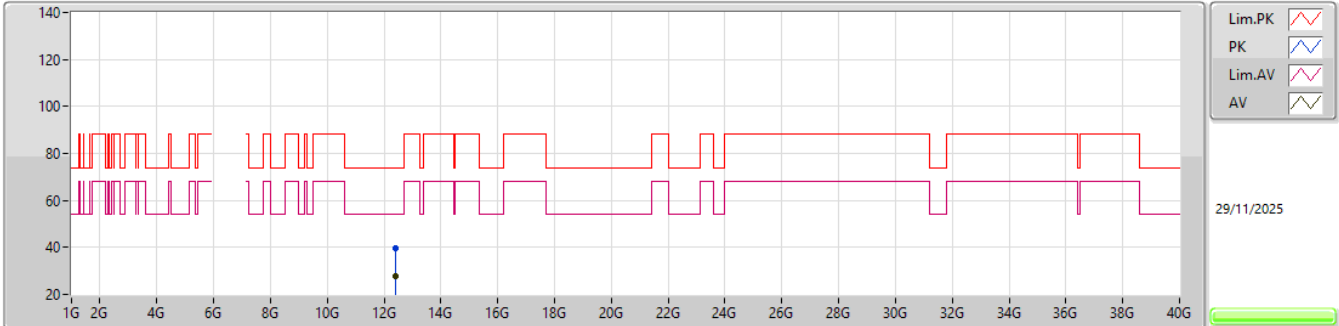
6205MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40808G	44.91	74.00	-29.09	60.49	3	Vertical	92	1.80	-	38.68	11.34	65.60			
AV	12.39841G	31.07	54.00	-22.93	46.64	3	Vertical	92	1.80	-	38.70	11.34	65.61			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

6205MHz_TX

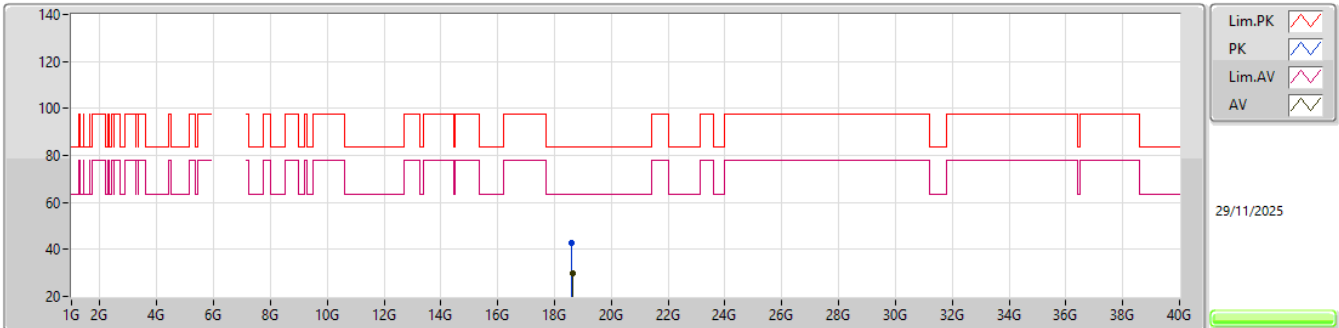


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39777G	39.70	74.00	-34.30	55.27	3	Horizontal	290	1.80	-	38.70	11.34	65.61			
AV	12.40409G	27.76	54.00	-26.24	43.33	3	Horizontal	290	1.80	-	38.69	11.34	65.60			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

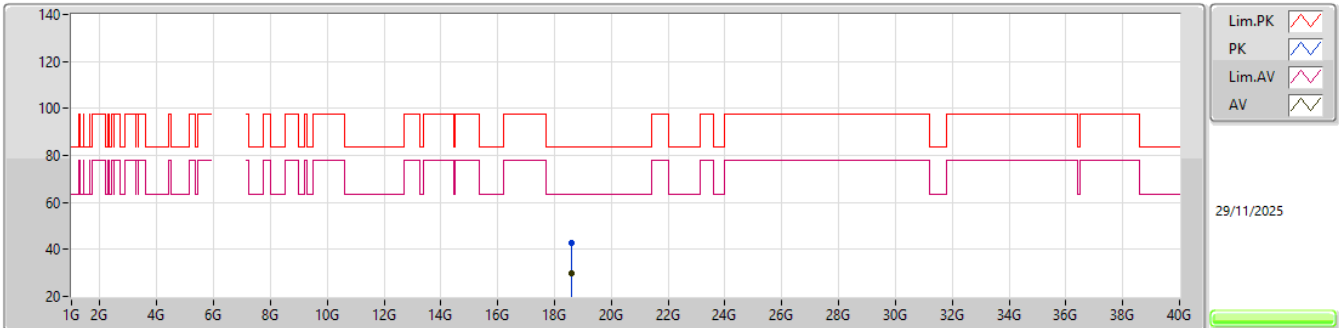
6205MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.60231G	42.65	83.54	-40.89	38.00	1	Vertical	186	1.75	-	37.70	16.59	49.64			
AV	18.62742G	29.70	63.54	-33.84	25.02	1	Vertical	186	1.75	-	37.70	16.60	49.62			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

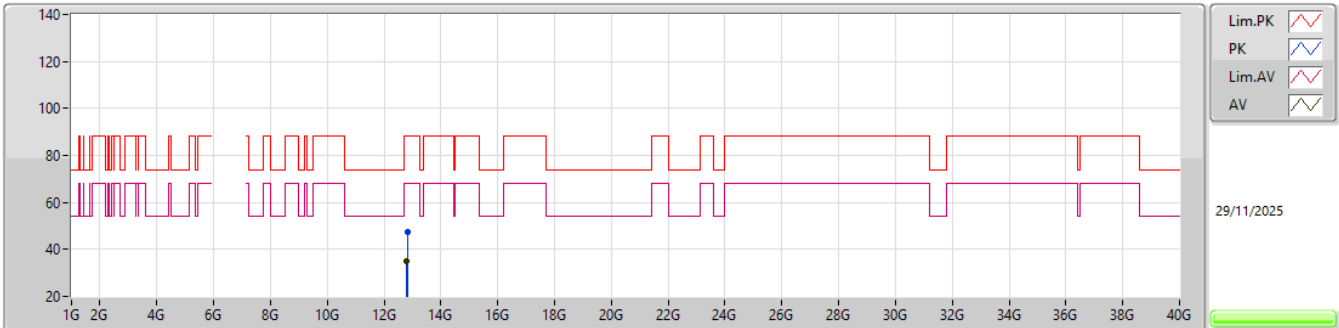
6205MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.60132G	43.01	83.54	-40.53	38.36	1	Horizontal	273	1.92	-	37.70	16.59	49.64			
AV	18.61311G	29.84	63.54	-33.70	25.18	1	Horizontal	273	1.92	-	37.70	16.59	49.63			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

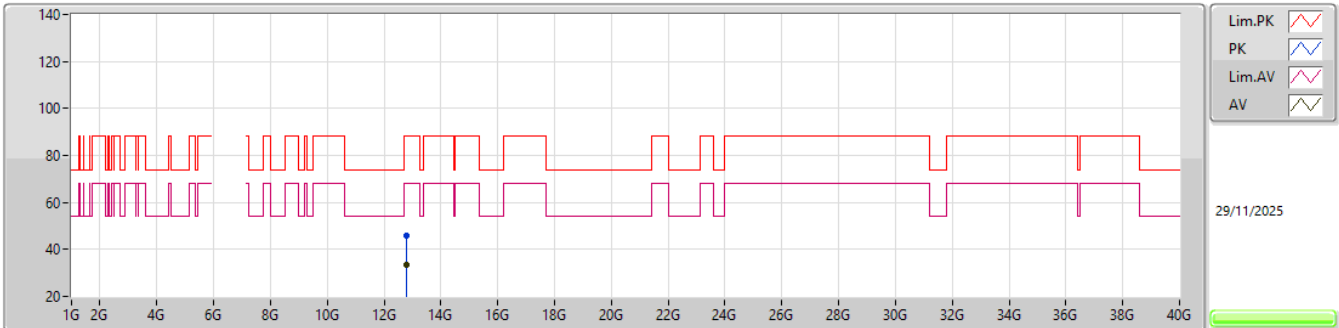
6405MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.81176G	47.66	88.20	-40.54	61.79	3	Vertical	74	2.12	-	39.42	11.59	65.14			
RMS	12.80433G	35.10	68.20	-33.10	49.25	3	Vertical	74	2.12	-	39.41	11.59	65.15			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

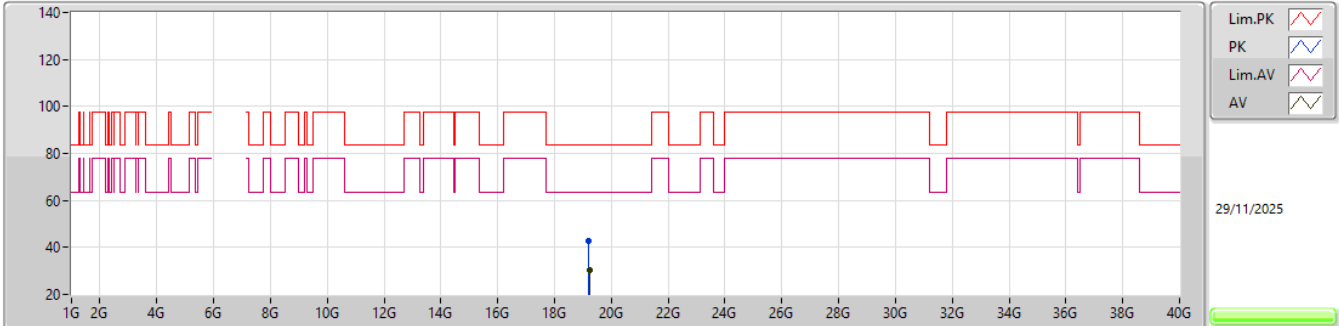
6405MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.79154G	46.09	88.20	-42.11	60.33	3	Horizontal	208	2.11	-	39.35	11.58	65.17			
RMS	12.80393G	33.44	68.20	-34.76	47.59	3	Horizontal	208	2.11	-	39.41	11.59	65.15			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

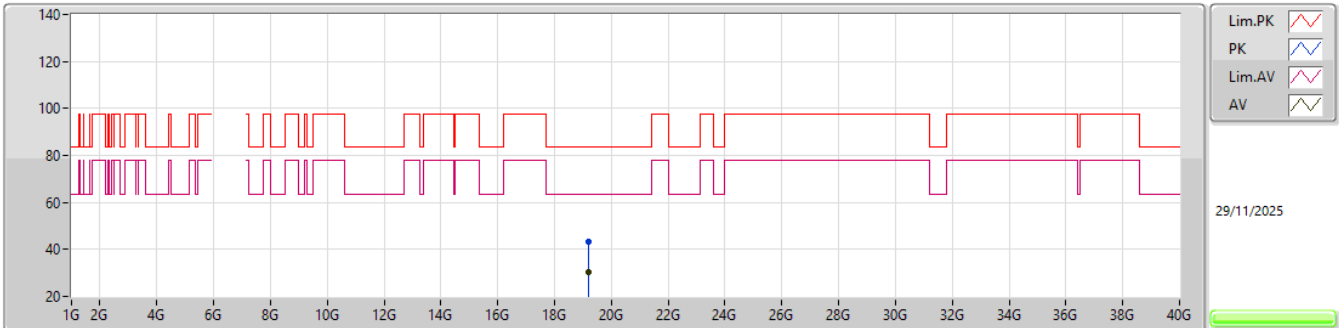
6405MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.20666G	42.76	83.54	-40.78	37.55	1	Vertical	273	2.16	-	37.73	16.91	49.43			
AV	19.22721G	30.43	63.54	-33.11	25.14	1	Vertical	273	2.16	-	37.81	16.92	49.44			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

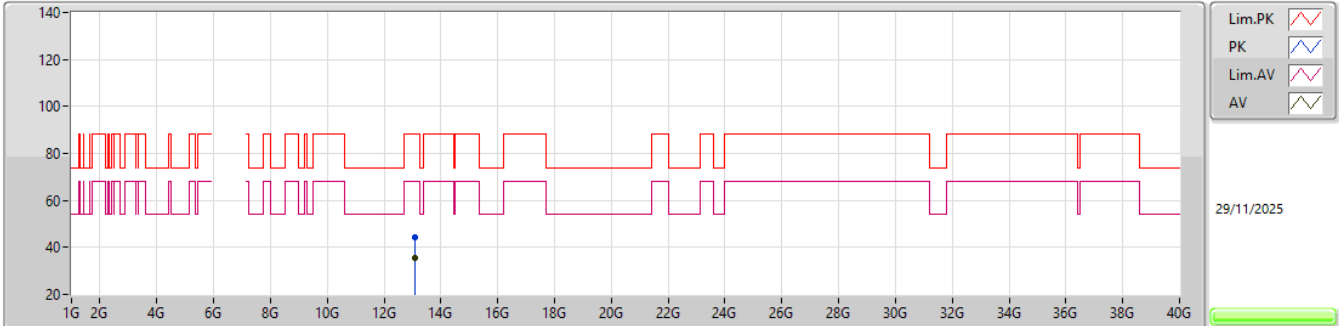
6405MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21371G	43.31	83.54	-40.23	38.08	1	Horizontal	65	1.65	-	37.75	16.91	49.43			
AV	19.2117G	30.50	63.54	-33.04	25.27	1	Horizontal	65	1.65	-	37.75	16.91	49.43			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

6565MHz_TX

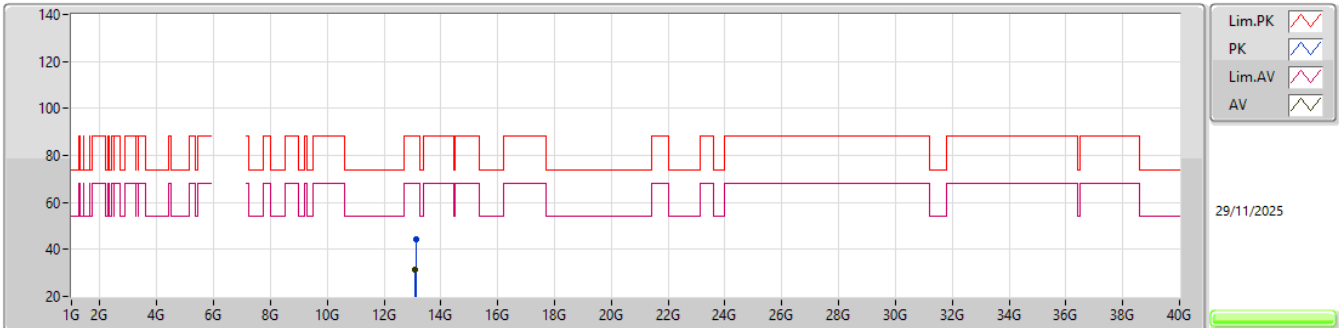


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.09292G	44.20	88.20	-44.00	58.00	3	Vertical	25	1.80	-	39.30	11.77	64.87			
RMS	13.10347G	35.67	68.20	-32.53	49.46	3	Vertical	25	1.80	-	39.31	11.77	64.87			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

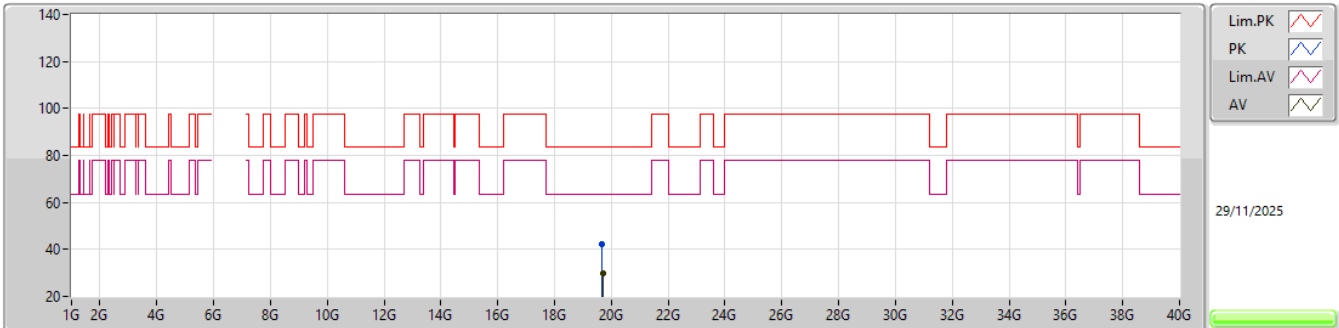
6565MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.1312G	44.27	88.20	-43.93	57.93	3	Horizontal	31	1.80	-	39.42	11.79	64.87			
RMS	13.10914G	31.57	68.20	-36.63	45.32	3	Horizontal	31	1.80	-	39.34	11.78	64.87			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

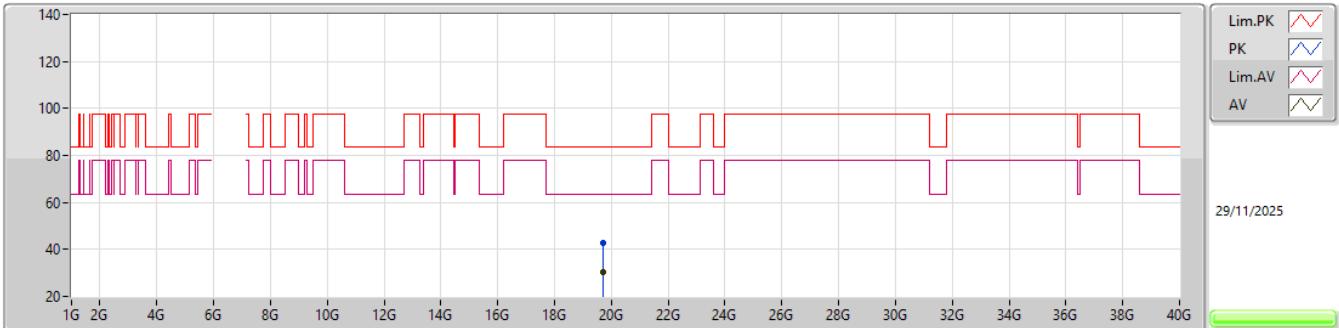
6565MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.68288G	42.49	83.54	-41.05	37.05	1	Vertical	299	1.14	-	37.73	17.19	49.48			
AV	19.70442G	30.02	63.54	-33.52	24.50	1	Vertical	299	1.14	-	37.78	17.20	49.46			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

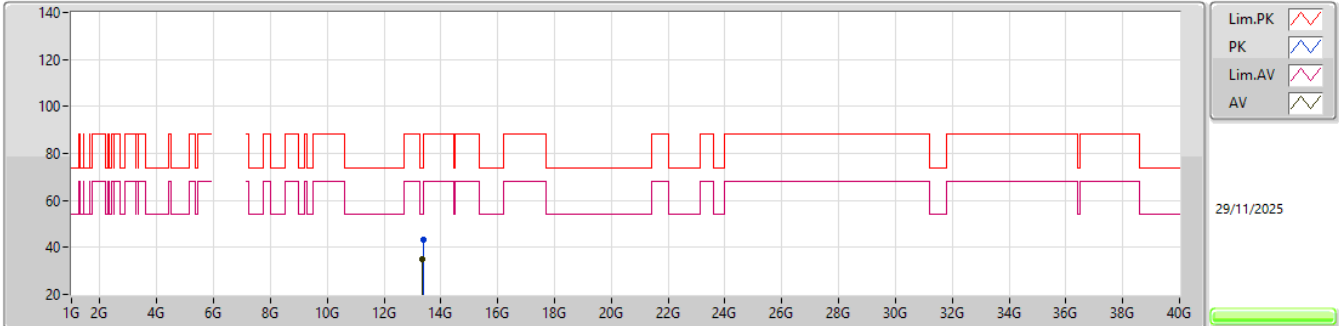
6565MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	19.69044G	42.92	83.54	-40.62	37.44	1	Horizontal	268	1.95	-	37.76	17.19	49.47				
AV	19.70934G	30.21	63.54	-33.33	24.71	1	Horizontal	268	1.95	-	37.76	17.20	49.46				

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

6685MHz_TX

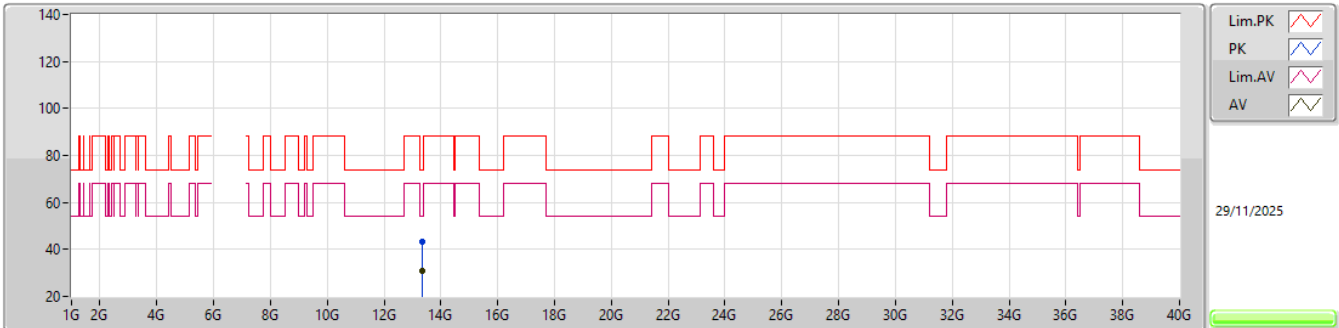


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.37135G	43.35	74.00	-30.65	56.21	3	Vertical	164	2.02	-	40.04	11.94	64.84			
AV	13.36361G	35.06	54.00	-18.94	47.93	3	Vertical	164	2.02	-	40.03	11.94	64.84			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

6685MHz_TX

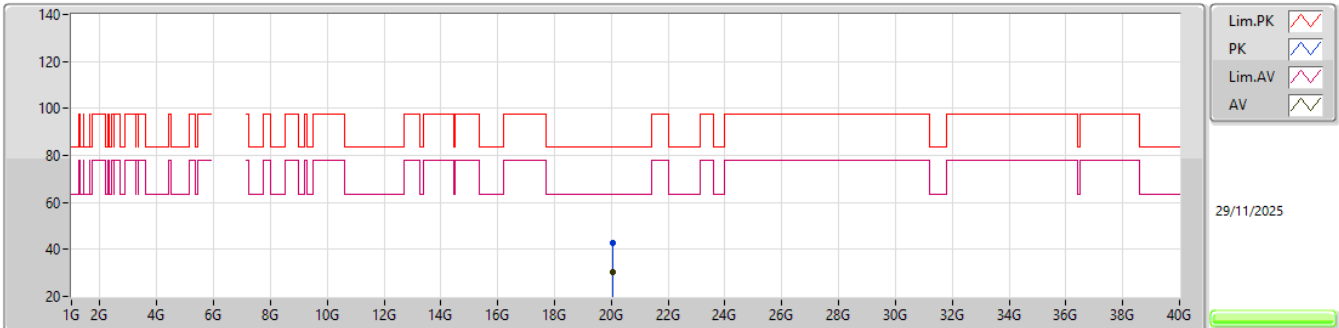


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.36377G	43.06	74.00	-30.94	55.93	3	Horizontal	218	2.03	-	40.03	11.94	64.84			
AV	13.36441G	30.86	54.00	-23.14	43.73	3	Horizontal	218	2.03	-	40.03	11.94	64.84			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

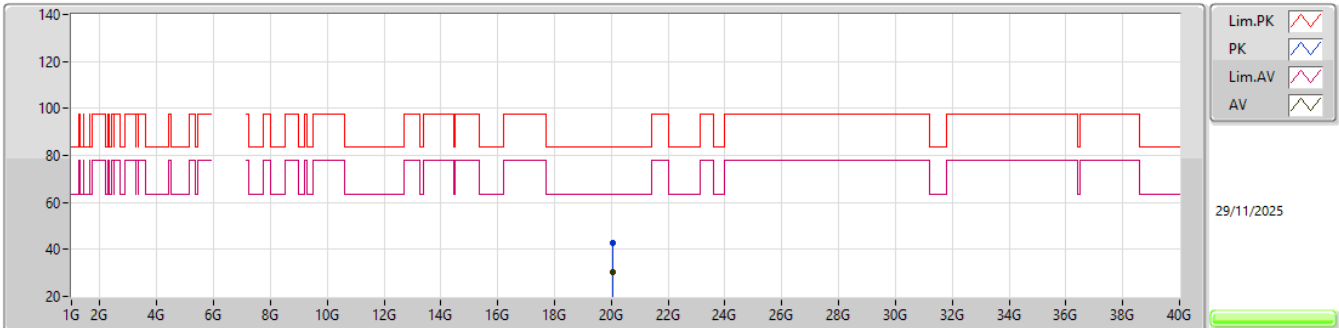
6685MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0373G	42.57	83.54	-40.97	36.80	1	Vertical	21	2.49	-	37.65	17.38	49.26			
AV	20.0322G	30.17	63.54	-33.37	24.39	1	Vertical	21	2.49	-	37.67	17.37	49.26			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

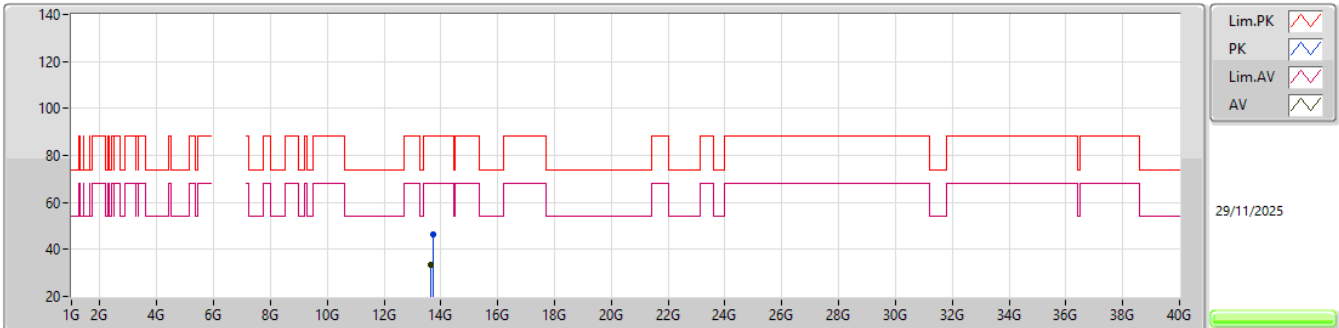
6685MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.03016G	42.59	83.54	-40.95	36.80	1	Horizontal	228	1.11	-	37.68	17.37	49.26			
AV	20.04114G	30.26	63.54	-33.28	24.50	1	Horizontal	228	1.11	-	37.64	17.38	49.26			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

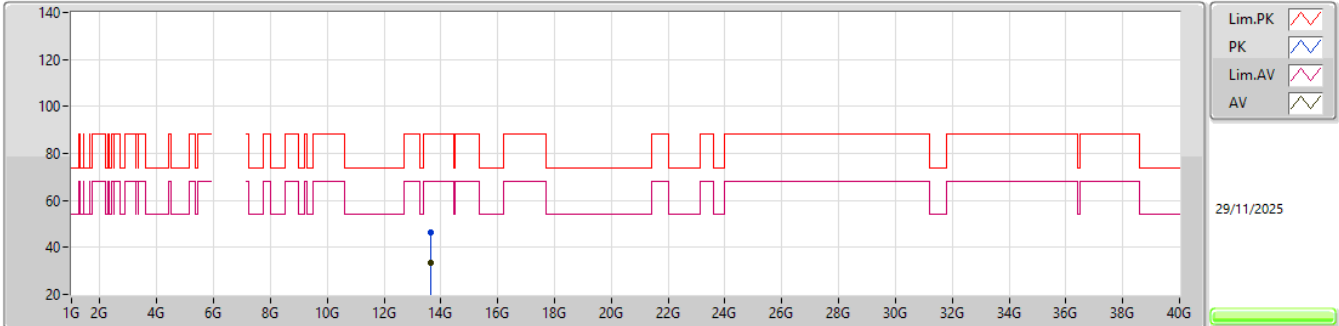
6845MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.70974G	46.17	88.20	-42.03	58.55	3	Vertical	314	1.80	-	40.20	12.15	64.73			
RMS	13.65995G	33.66	68.20	-34.54	46.18	3	Vertical	314	1.80	-	40.12	12.12	64.76			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

6845MHz_TX

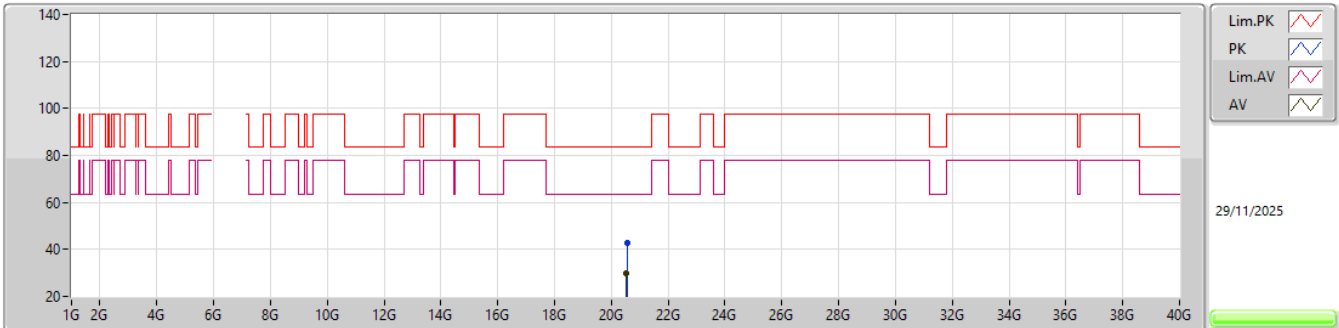


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.65036G	46.31	88.20	-41.89	58.86	3	Horizontal	34	1.80	-	40.10	12.11	64.76			
RMS	13.65092G	33.66	68.20	-34.54	46.21	3	Horizontal	34	1.80	-	40.10	12.11	64.76			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

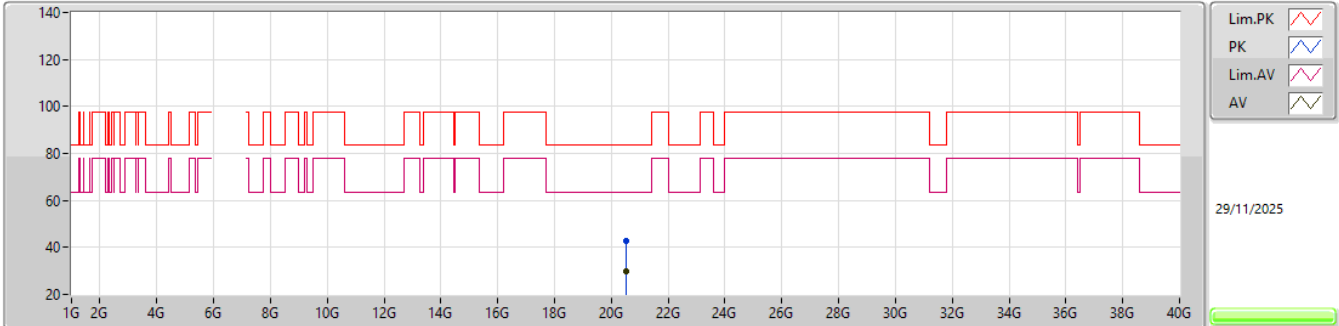
6845MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.55828G	42.62	83.54	-40.92	36.65	1	Vertical	53	1.47	-	37.72	17.45	49.20			
AV	20.52096G	29.95	63.54	-33.59	24.03	1	Vertical	53	1.47	-	37.70	17.44	49.22			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

6845MHz_TX

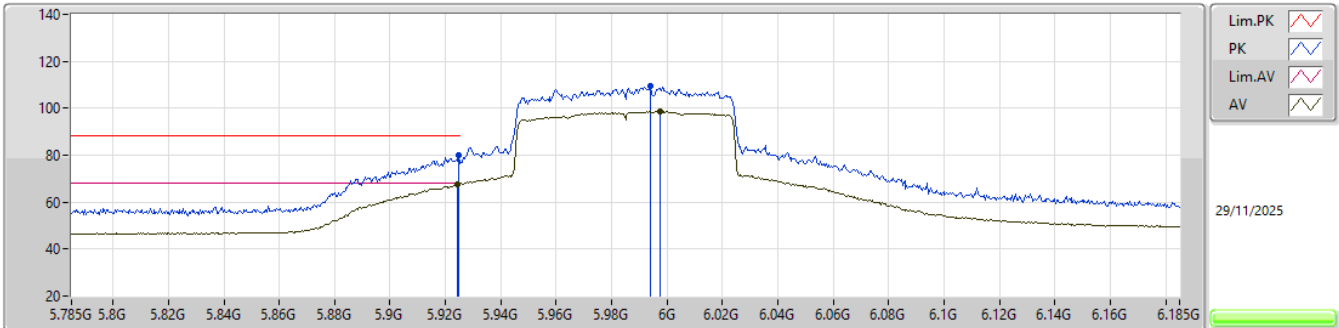


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.50524G	42.89	83.54	-40.65	36.98	1	Horizontal	237	1.24	-	37.70	17.44	49.23			
AV	20.50866G	29.89	63.54	-33.65	23.98	1	Horizontal	237	1.24	-	37.70	17.44	49.23			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

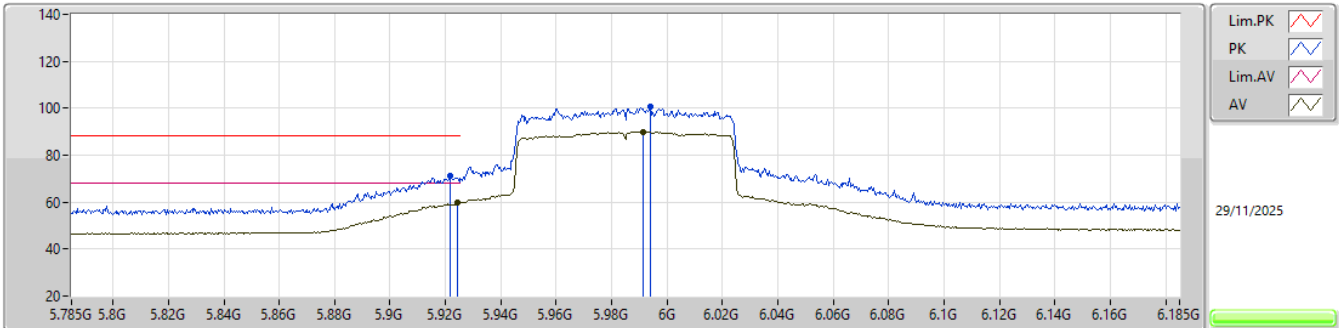
5985MHz_TX

EUT_Z_1TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9246G	79.86	88.20	-8.34	73.80	3	Vertical	161	2.37	-	32.25	7.57	33.76			
RMS	5.9242G	67.71	68.20	-0.49	61.65	3	Vertical	161	2.37	-	32.25	7.57	33.76			
PK	5.9942G	109.29	Inf	-Inf	102.95	3	Vertical	161	2.37	-	32.39	7.70	33.75			
RMS	5.9974G	98.65	Inf	-Inf	92.30	3	Vertical	161	2.37	-	32.39	7.71	33.75			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

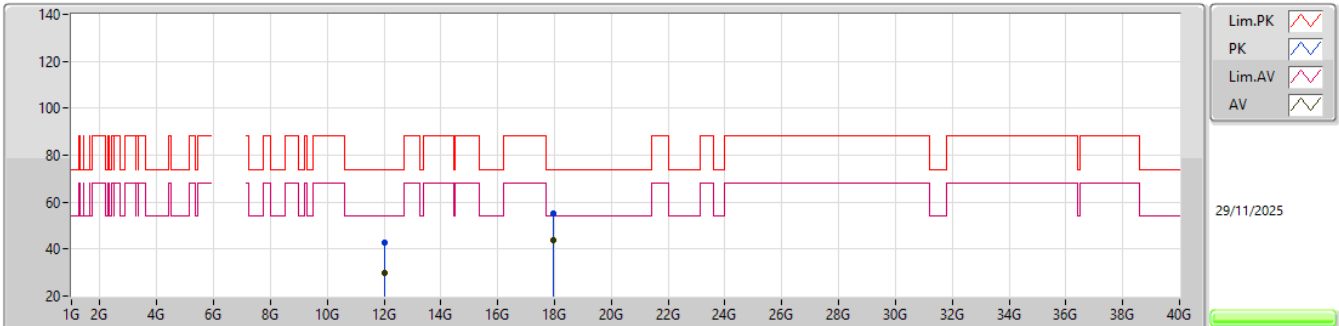
5985MHz_TX

EUT_Z_1TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9218G	71.42	88.20	-16.78	65.37	3	Horizontal	261	1.12	-	32.24	7.57	33.76			
RMS	5.9242G	59.72	68.20	-8.48	53.66	3	Horizontal	261	1.12	-	32.25	7.57	33.76			
PK	5.9942G	100.59	Inf	-Inf	94.25	3	Horizontal	261	1.12	-	32.39	7.70	33.75			
RMS	5.9914G	89.97	Inf	-Inf	83.65	3	Horizontal	261	1.12	-	32.38	7.69	33.75			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

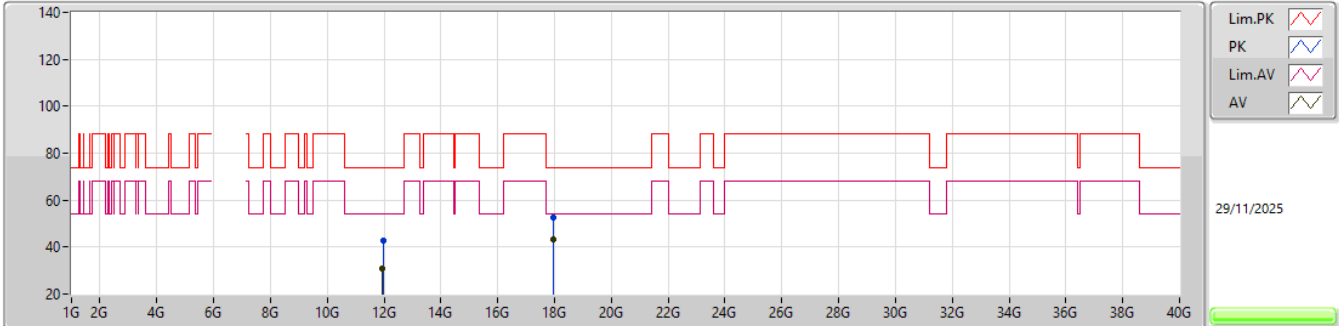
5985MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	12.02722G	42.74	74.00	-31.26	58.32	3	Vertical	216	1.80	-	39.05	11.11	65.74				
AV	12.02047G	29.61	54.00	-24.39	45.21	3	Vertical	216	1.80	-	39.04	11.10	65.74				
PK	17.96835G	54.97	74.00	-19.03	52.21	3	Vertical	76	2.96	-	51.93	14.78	63.95				
AV	17.9673G	43.92	54.00	-10.08	41.22	3	Vertical	76	2.96	-	51.87	14.78	63.95				

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5985MHz_TX

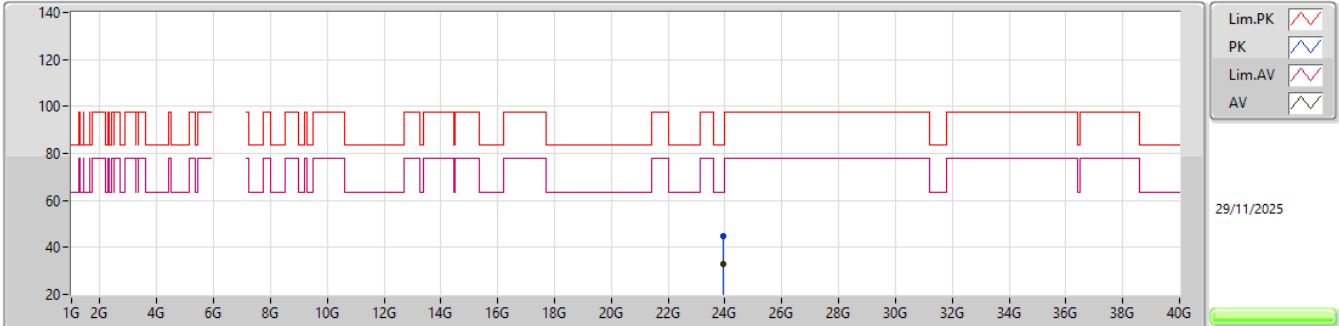


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.96984G	42.91	74.00	-31.09	58.73	3	Horizontal	359	2.52	-	38.88	11.08	65.78			
AV	11.9225G	30.70	54.00	-23.30	46.65	3	Horizontal	359	2.52	-	38.80	11.07	65.82			
PK	17.96121G	52.41	74.00	-21.59	50.07	3	Horizontal	206	1.23	-	51.53	14.77	63.96			
AV	17.96613G	43.41	54.00	-10.59	40.78	3	Horizontal	206	1.23	-	51.80	14.78	63.95			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

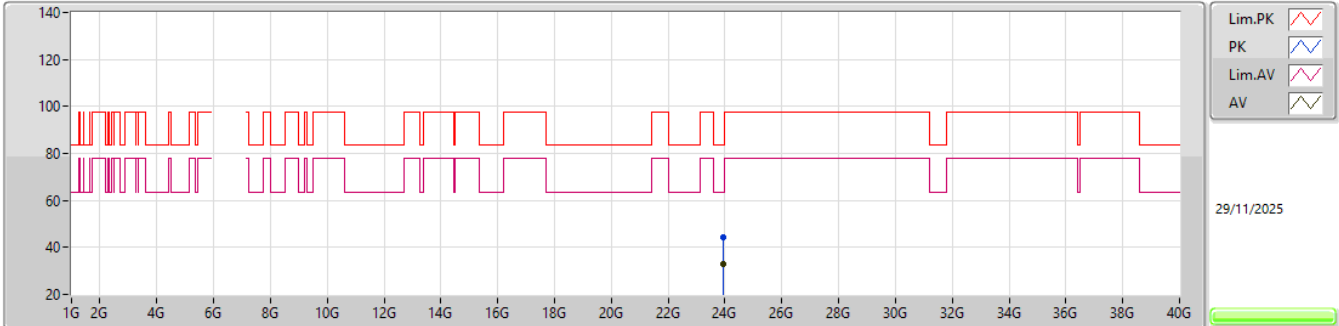
5985MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	23.91834G	45.03	83.54	-38.51	34.60	1	Vertical	249	1.90	-	38.77	18.76	47.10			
AV	23.92068G	32.80	63.54	-30.74	22.36	1	Vertical	249	1.90	-	38.78	18.76	47.10			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

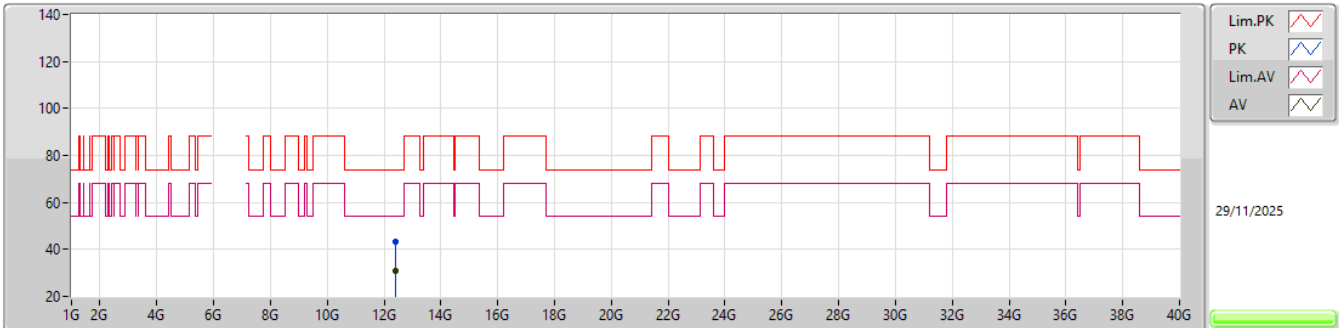
5985MHz_TX


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.92902G	44.40	83.54	-39.14	33.90	1	Horizontal	101	1.87	-	38.82	18.77	47.09			
AV	23.92956G	32.76	63.54	-30.78	22.26	1	Horizontal	101	1.87	-	38.82	18.77	47.09			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

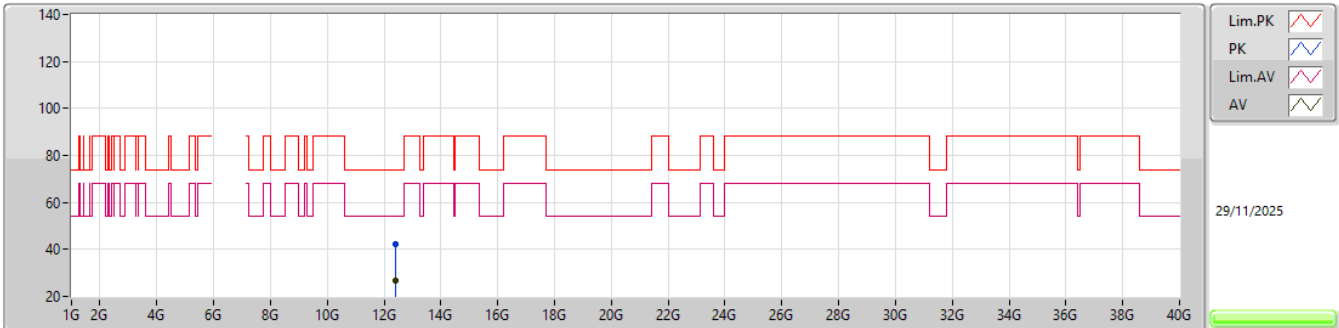
6225MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39517G	43.44	74.00	-30.56	59.00	3	Vertical	157	2.94	-	38.71	11.34	65.61			
AV	12.40652G	30.65	54.00	-23.35	46.22	3	Vertical	157	2.94	-	38.69	11.34	65.60			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

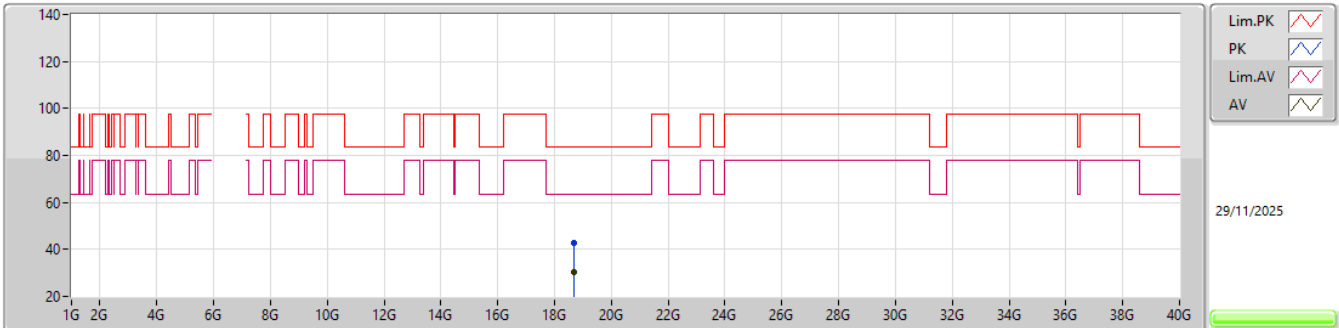
6225MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.41276G	42.34	74.00	-31.66	57.92	3	Horizontal	346	1.80	-	38.67	11.35	65.60			
AV	12.39645G	26.94	54.00	-27.06	42.50	3	Horizontal	346	1.80	-	38.71	11.34	65.61			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

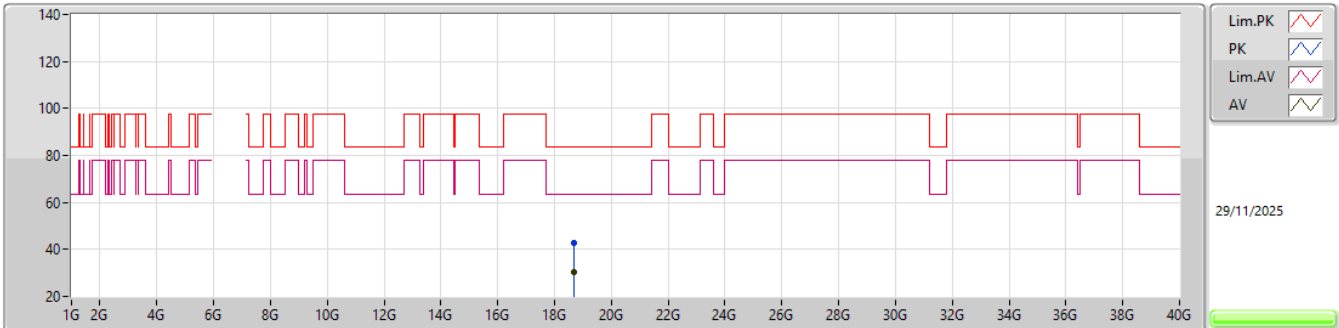
6225MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.68838G	42.82	83.54	-40.72	38.14	1	Vertical	312	1.95	-	37.62	16.63	49.57			
AV	18.70068G	30.31	63.54	-33.23	25.63	1	Vertical	312	1.95	-	37.60	16.64	49.56			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

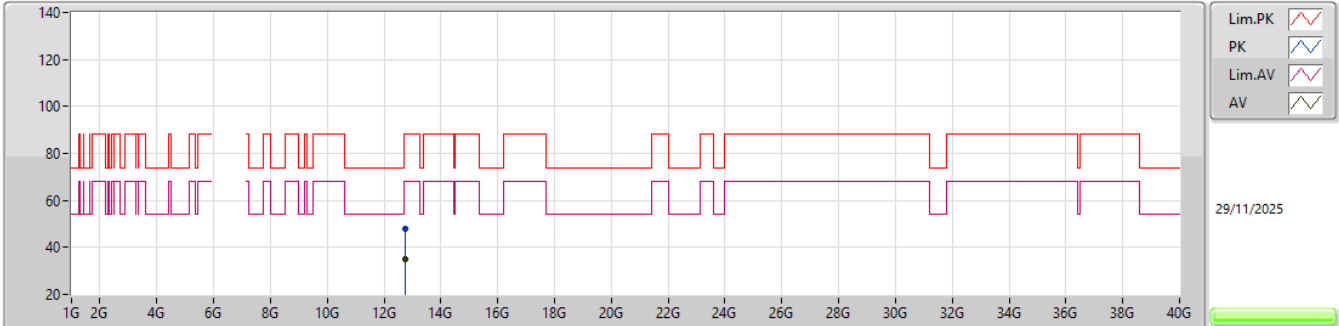
6225MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.69402G	42.90	83.54	-40.64	38.22	1	Horizontal	278	1.30	-	37.61	16.63	49.56			
AV	18.69918G	30.38	63.54	-33.16	25.70	1	Horizontal	278	1.30	-	37.60	16.64	49.56			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

6385MHz_TX

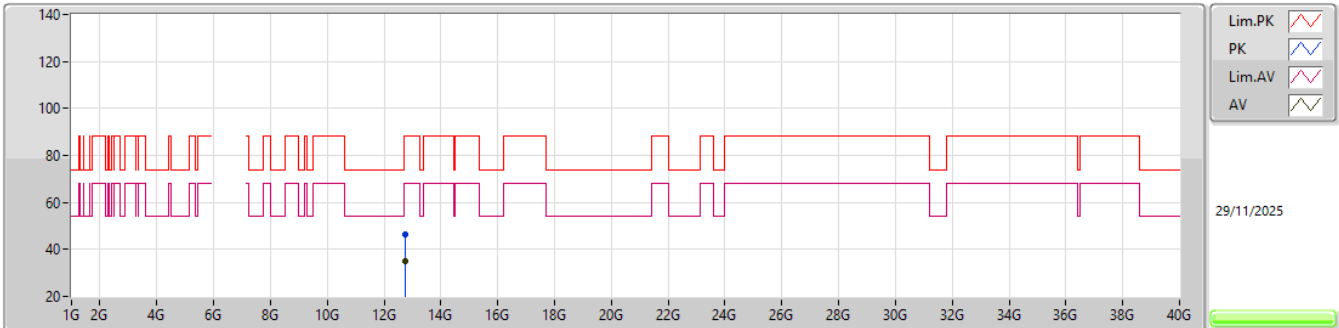


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.74027G	47.68	88.20	-40.52	62.27	3	Vertical	189	2.13	-	39.10	11.55	65.24			
RMS	12.75977G	35.04	68.20	-33.16	49.53	3	Vertical	189	2.13	-	39.16	11.56	65.21			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

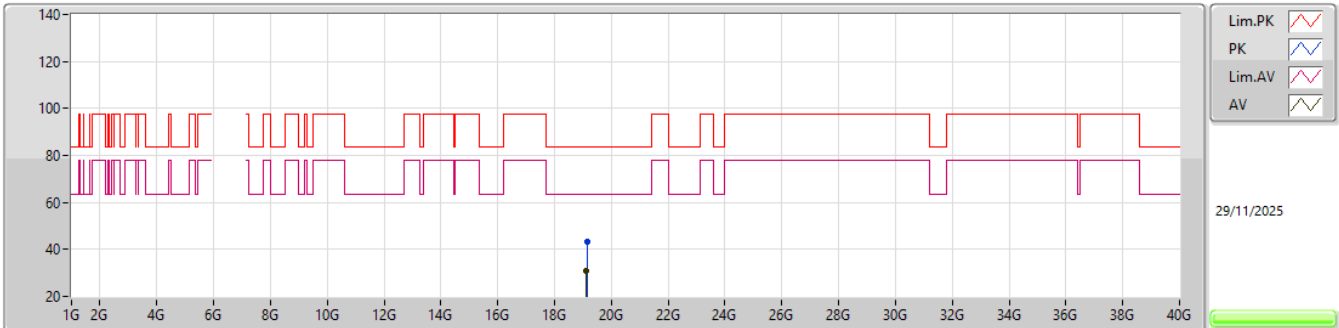
6385MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.766G	46.42	88.20	-41.78	60.86	3	Horizontal	217	2.08	-	39.20	11.56	65.20			
RMS	12.76377G	34.83	68.20	-33.37	49.30	3	Horizontal	217	2.08	-	39.18	11.56	65.21			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

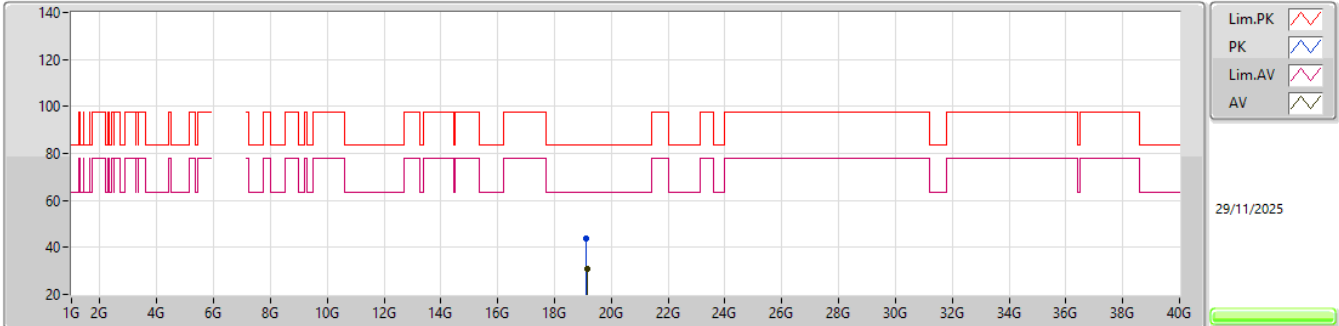
6385MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.1385G	43.25	83.54	-40.29	37.92	1	Vertical	317	1.74	-	37.85	16.87	49.39			
AV	19.1274G	30.98	63.54	-32.56	25.69	1	Vertical	317	1.74	-	37.81	16.86	49.38			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

6385MHz_TX

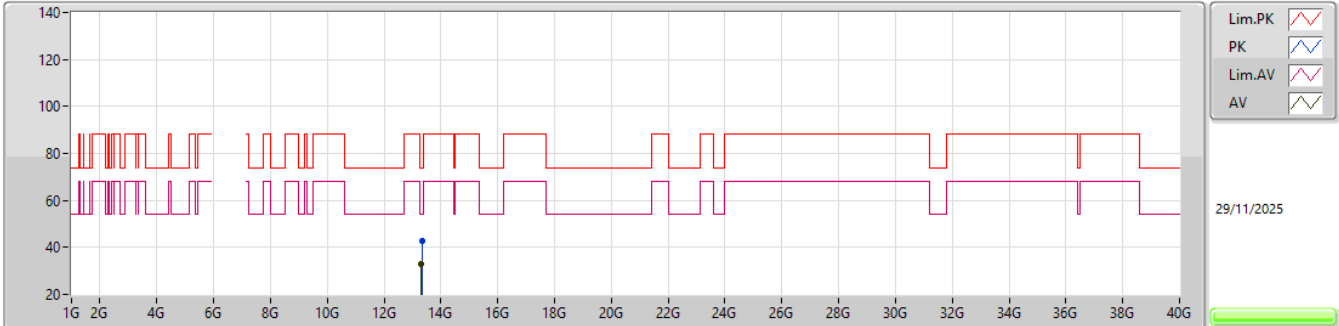


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.12824G	43.58	83.54	-39.96	38.29	1	Horizontal	294	1.74	-	37.81	16.86	49.38			
AV	19.16442G	30.98	63.54	-32.56	25.66	1	Horizontal	294	1.74	-	37.84	16.89	49.41			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

6625MHz_TX

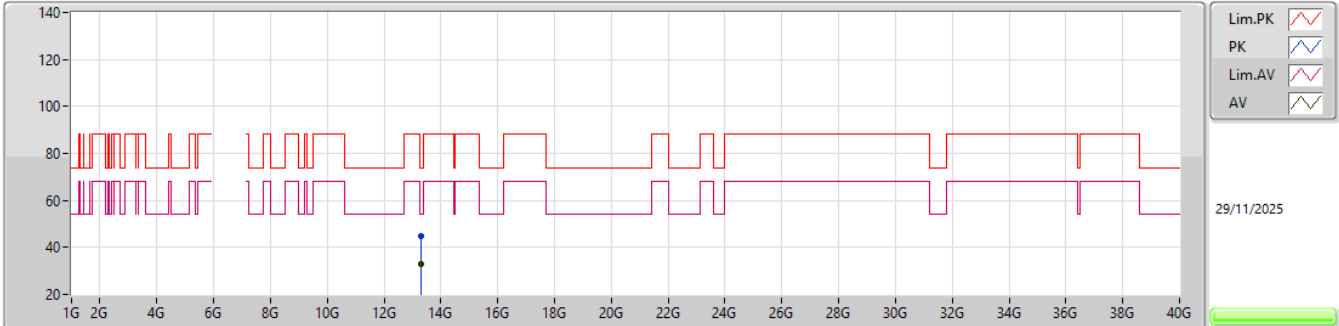


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.3292G	42.92	74.00	-31.08	56.03	3	Vertical	1	1.80	-	39.83	11.91	64.85			
AV	13.32081G	33.17	54.00	-20.83	46.34	3	Vertical	1	1.80	-	39.77	11.91	64.85			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

6625MHz_TX

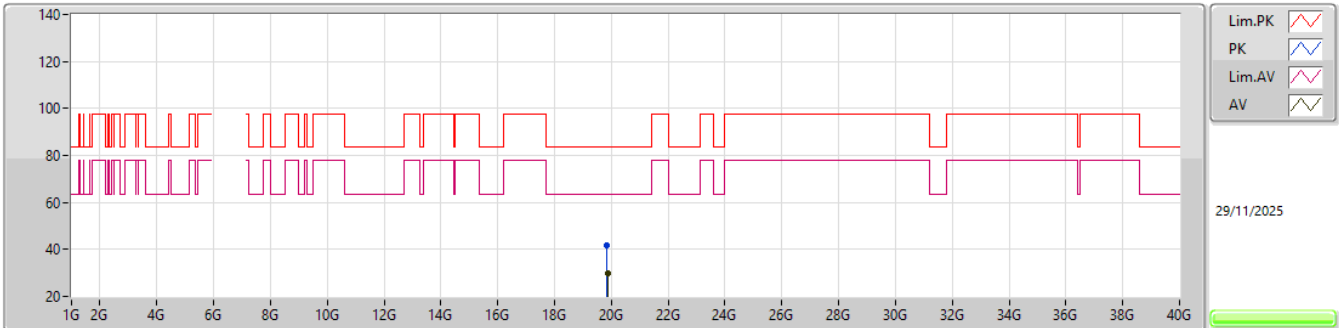


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	13.32043G	44.75	74.00	-29.25	57.93	3	Horizontal	302.1	1.80	-	39.76	11.91	64.85				
AV	13.31234G	32.95	54.00	-21.05	46.20	3	Horizontal	302.1	1.80	-	39.70	11.90	64.85				

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

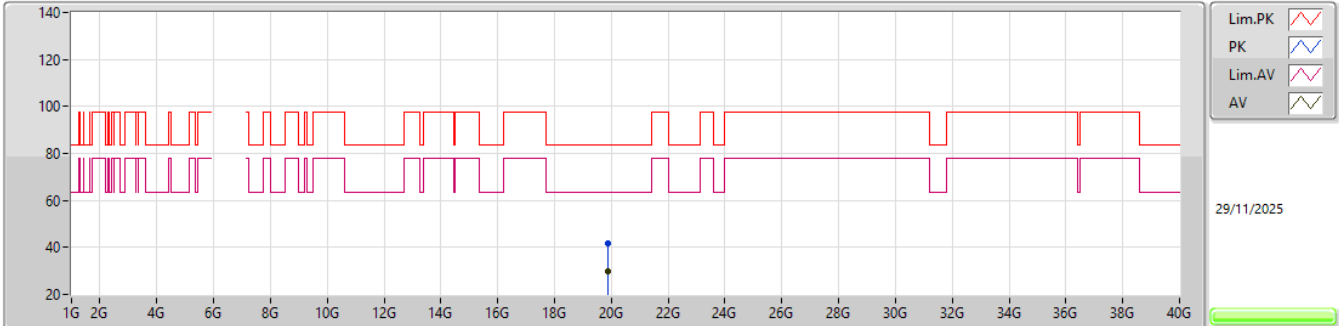
6625MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.8501G	41.93	83.54	-41.61	36.31	1	Vertical	236	1.63	-	37.70	17.28	49.36			
AV	19.86018G	29.70	63.54	-33.84	24.09	1	Vertical	236	1.63	-	37.68	17.29	49.36			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

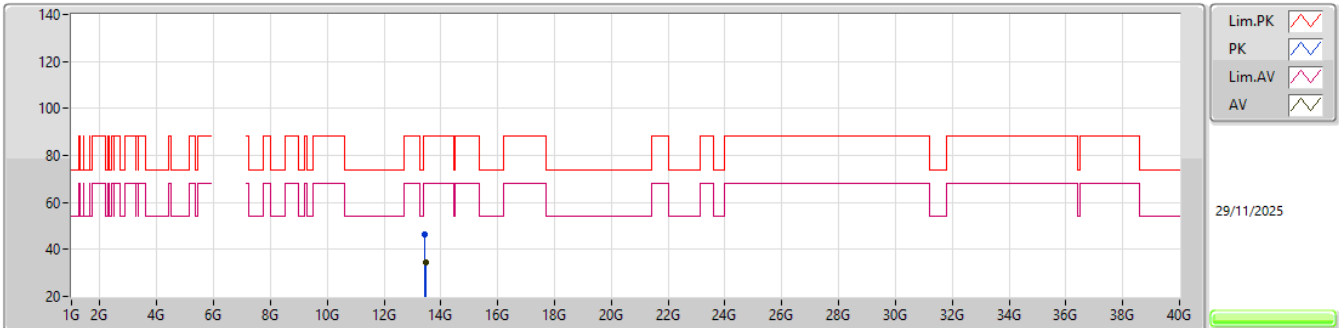
6625MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.86174G	41.83	83.54	-41.71	36.21	1	Horizontal	228	1.50	-	37.68	17.29	49.35			
AV	19.87302G	29.63	63.54	-33.91	24.03	1	Horizontal	228	1.50	-	37.65	17.30	49.35			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

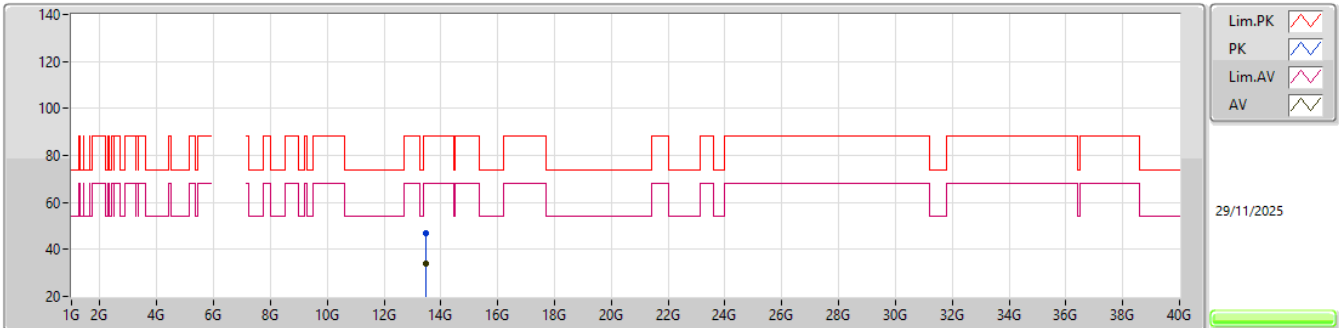
6705MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.43861G	46.51	88.20	-41.69	59.27	3	Vertical	130	2.09	-	40.10	11.98	64.84			
RMS	13.4694G	34.36	68.20	-33.84	47.05	3	Vertical	130	2.09	-	40.14	12.00	64.83			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

6705MHz_TX

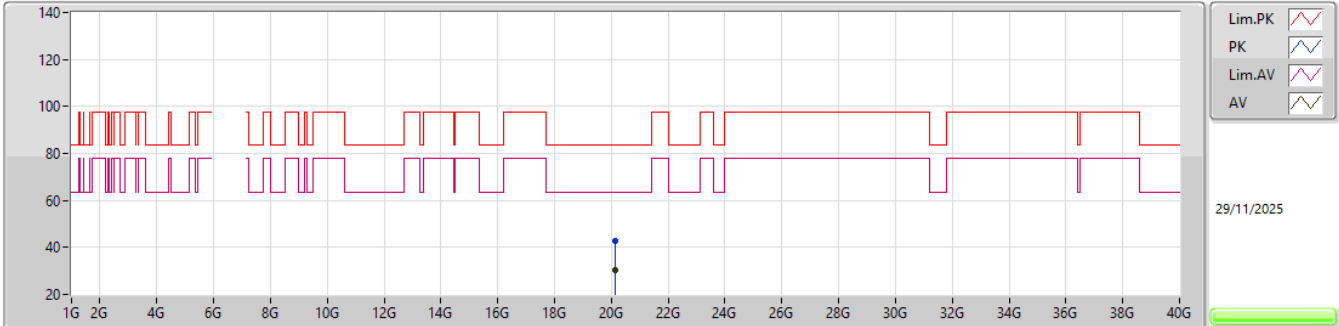


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.475G	46.73	88.20	-41.47	59.41	3	Horizontal	87	1.80	-	40.15	12.00	64.83			
RMS	13.48538G	34.02	68.20	-34.18	46.67	3	Horizontal	87	1.80	-	40.17	12.01	64.83			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

6705MHz_TX

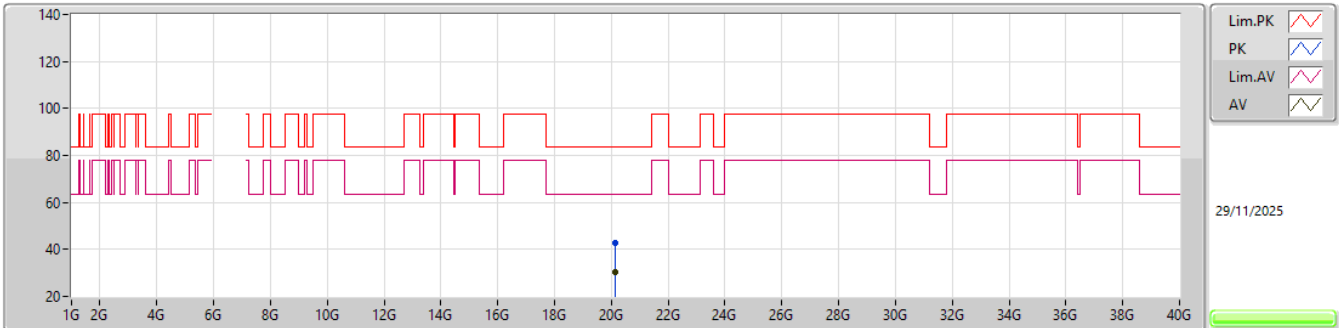


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.11962G	42.72	83.54	-40.82	36.88	1	Vertical	281	2.57	-	37.70	17.39	49.25			
AV	20.13138G	30.27	63.54	-33.27	24.43	1	Vertical	281	2.57	-	37.70	17.39	49.25			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

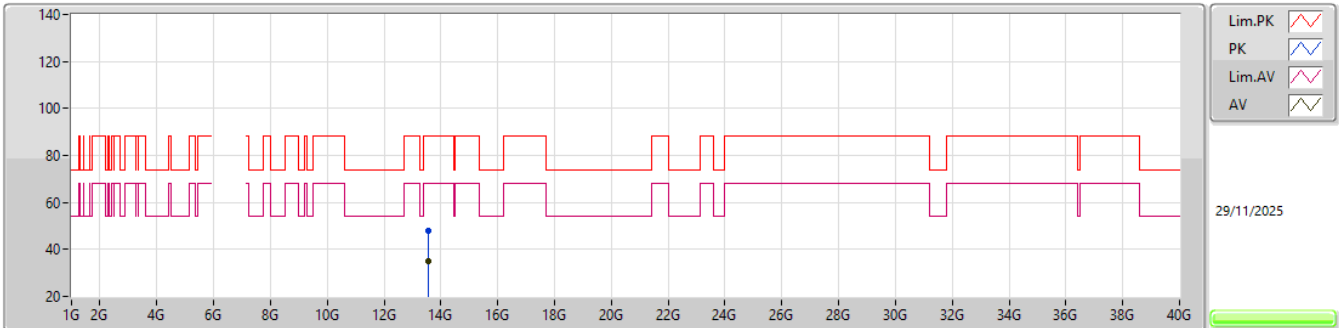
6705MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.124G	42.81	83.54	-40.73	36.97	1	Horizontal	187	1.42	-	37.70	17.39	49.25			
AV	20.12862G	30.24	63.54	-33.30	24.40	1	Horizontal	187	1.42	-	37.70	17.39	49.25			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

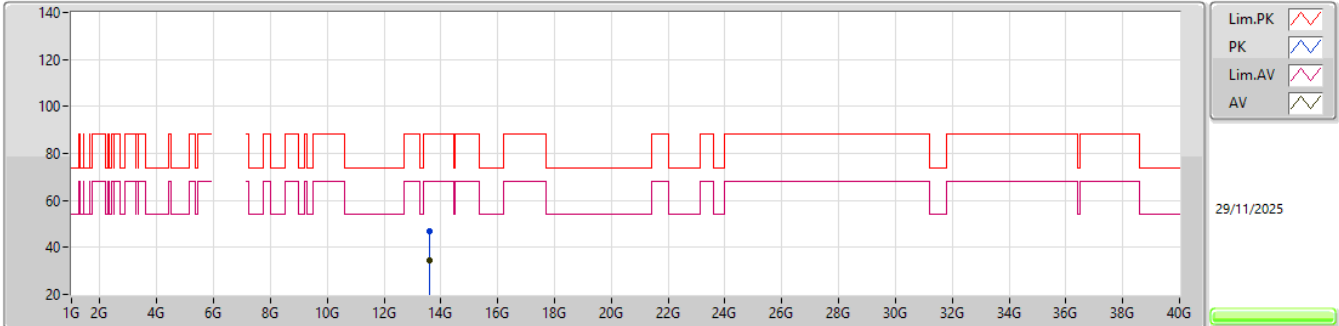
6785MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.57975G	47.69	88.20	-40.51	60.09	3	Vertical	182	1.12	-	40.32	12.07	64.79			
RMS	13.57895G	35.06	68.20	-33.14	47.45	3	Vertical	182	1.12	-	40.33	12.07	64.79			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

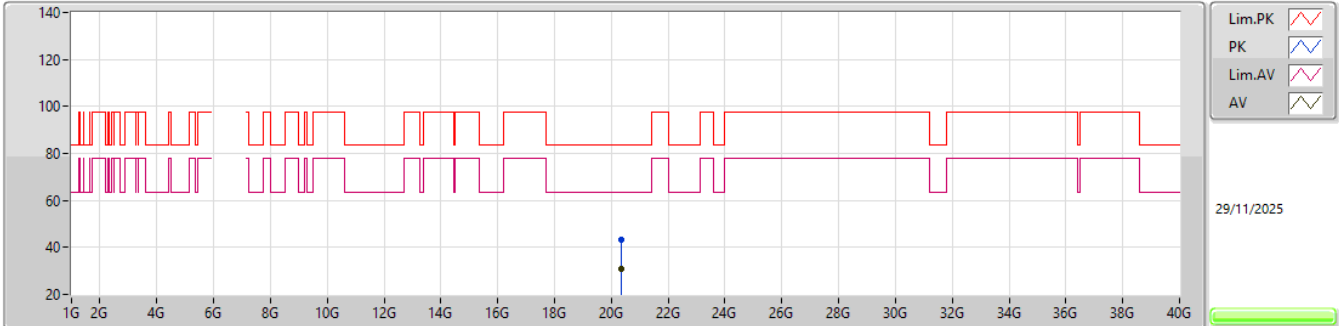
6785MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.5879G	46.67	88.20	-41.53	59.12	3	Horizontal	360	1.80	-	40.27	12.07	64.79			
RMS	13.58151G	34.40	68.20	-33.80	46.81	3	Horizontal	360	1.80	-	40.31	12.07	64.79			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

6785MHz_TX

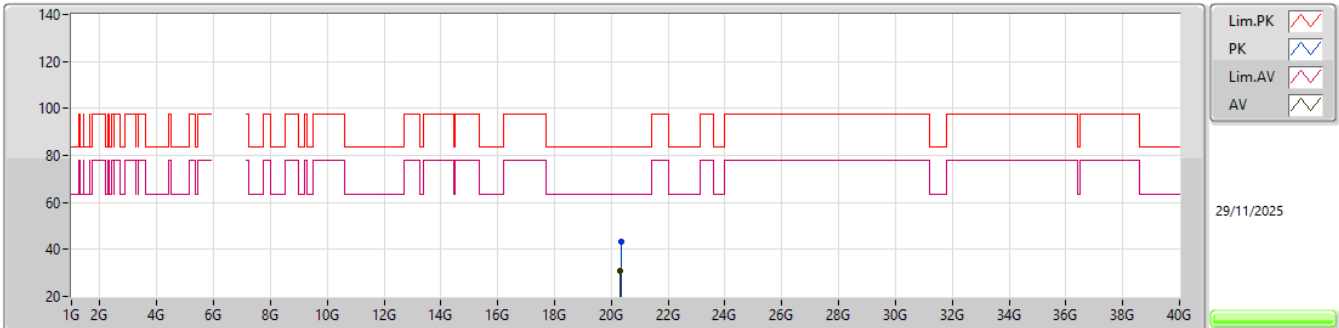


EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.3577G	43.50	83.54	-40.04	37.55	1	Vertical	292	2.84	-	37.77	17.42	49.24			
AV	20.36958G	30.64	63.54	-32.90	24.74	1	Vertical	292	2.84	-	37.72	17.42	49.24			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

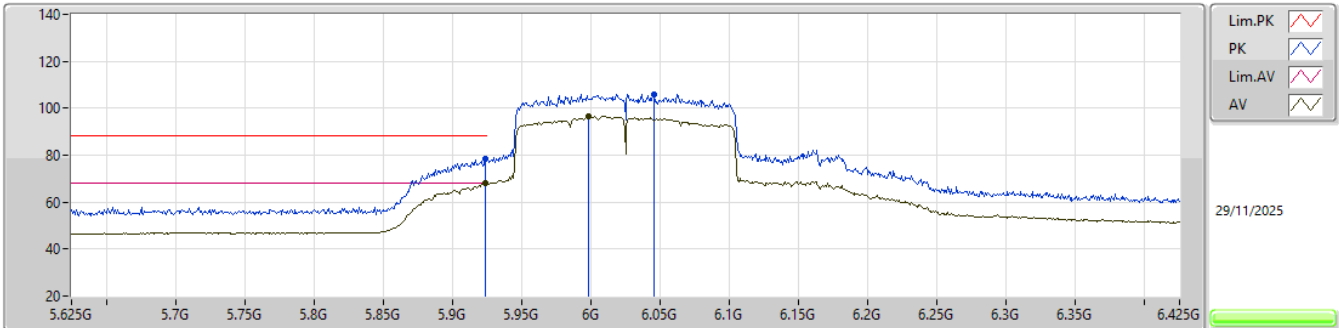
6785MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.35314G	43.27	83.54	-40.27	37.30	1	Horizontal	242	2.85	-	37.79	17.42	49.24			
AV	20.3271G	30.77	63.54	-32.77	24.84	1	Horizontal	242	2.85	-	37.75	17.42	49.24			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

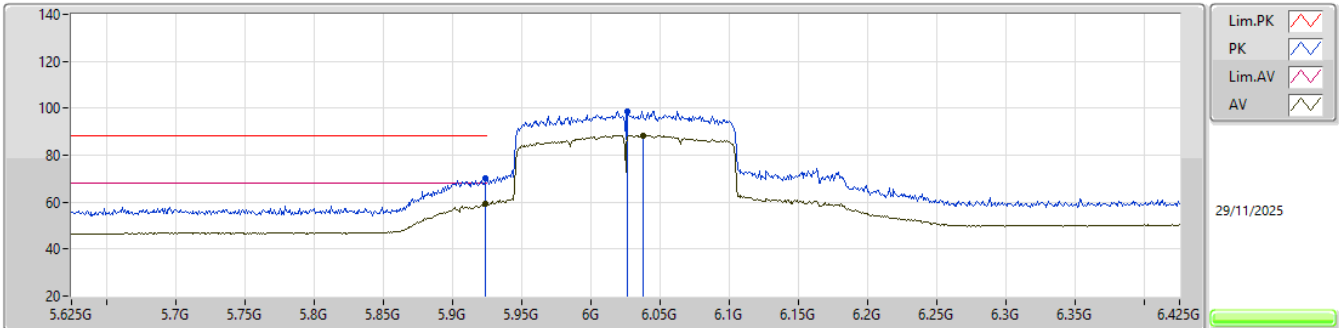
6025MHz_TX

EUT_Z_1TX
SET 85

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9242G	78.41	88.20	-9.79	72.35	3	Vertical	162	2.27	-	32.25	7.57	33.76			
RMS	5.9234G	67.87	68.20	-0.33	61.81	3	Vertical	162	2.27	-	32.25	7.57	33.76			
PK	6.0458G	106.04	Inf	-Inf	99.59	3	Vertical	162	2.27	-	32.49	7.68	33.72			
RMS	5.9986G	96.70	Inf	-Inf	90.34	3	Vertical	162	2.27	-	32.40	7.71	33.75			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

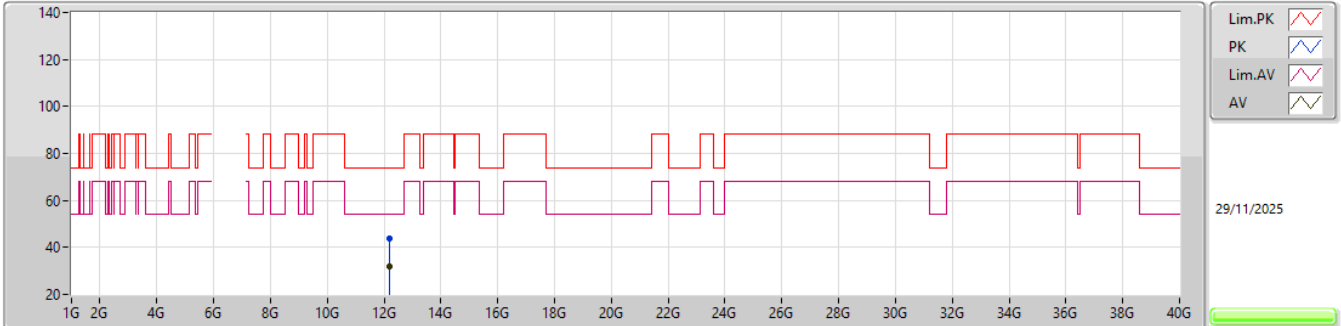
6025MHz_TX

EUT_Z_1TX
SET 85

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9242G	70.05	88.20	-18.15	63.99	3	Horizontal	258	1.06	-	32.25	7.57	33.76			
RMS	5.9234G	59.15	68.20	-9.05	53.09	3	Horizontal	258	1.06	-	32.25	7.57	33.76			
PK	6.0266G	98.74	Inf	-Inf	92.33	3	Horizontal	258	1.06	-	32.45	7.69	33.73			
RMS	6.0378G	88.41	Inf	-Inf	81.97	3	Horizontal	258	1.06	-	32.48	7.69	33.73			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

6025MHz_TX

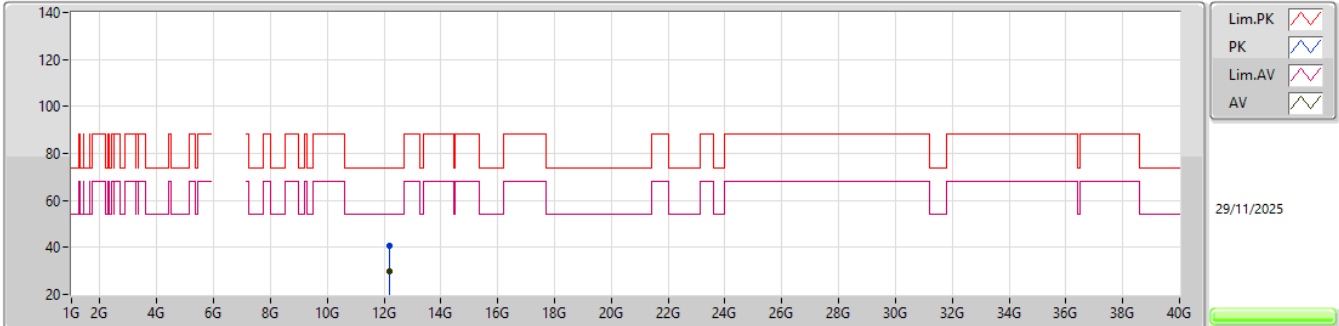


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.19545G	43.77	74.00	-30.23	59.22	3	Vertical	262	1.80	-	39.02	11.21	65.68			
AV	12.18331G	31.97	54.00	-22.03	47.38	3	Vertical	262	1.80	-	39.07	11.20	65.68			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

6025MHz_TX

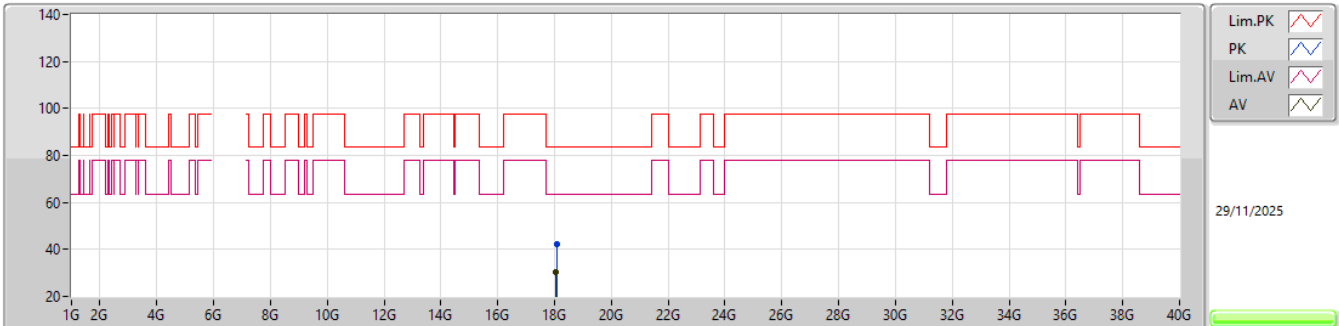


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	12.19577G	40.73	74.00	-33.27	56.18	3	Horizontal	70	1.80	-	39.02	11.21	65.68				
AV	12.18043G	30.05	54.00	-23.95	45.46	3	Horizontal	70	1.80	70	39.08	11.20	65.69				

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

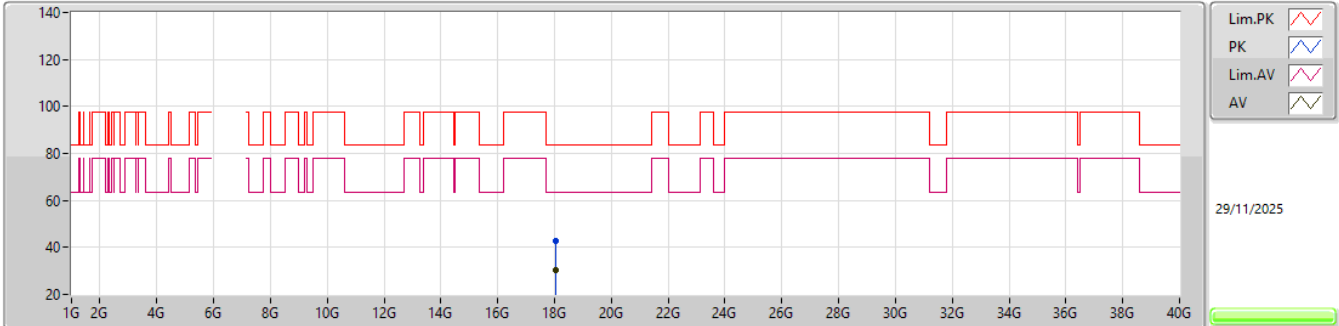
6025MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.09348G	42.28	83.54	-41.26	38.09	1	Vertical	147	2.03	-	37.39	16.33	49.53			
AV	18.05094G	30.37	63.54	-33.17	26.27	1	Vertical	147	2.03	-	37.30	16.31	49.51			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

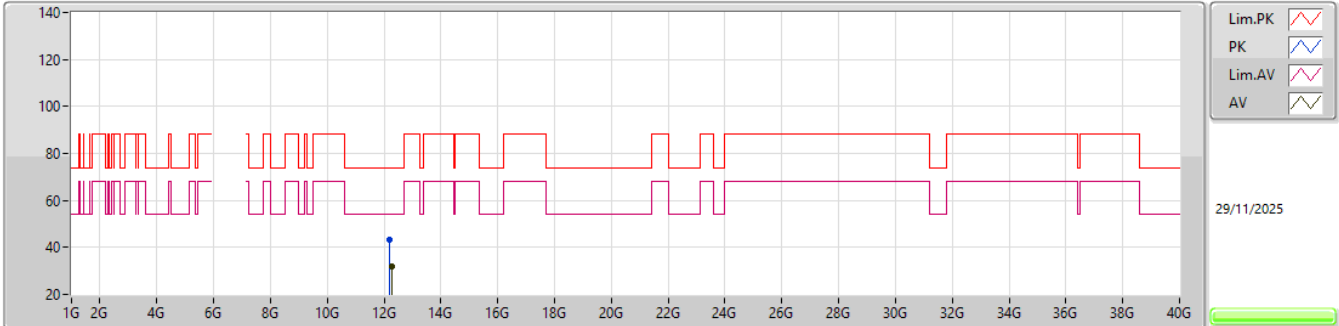
6025MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.05352G	42.60	83.54	-40.94	38.49	1	Horizontal	75	2.17	-	37.31	16.31	49.51			
AV	18.04944G	30.36	63.54	-33.18	26.26	1	Horizontal	75	2.17	-	37.30	16.31	49.51			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

6185MHz_TX

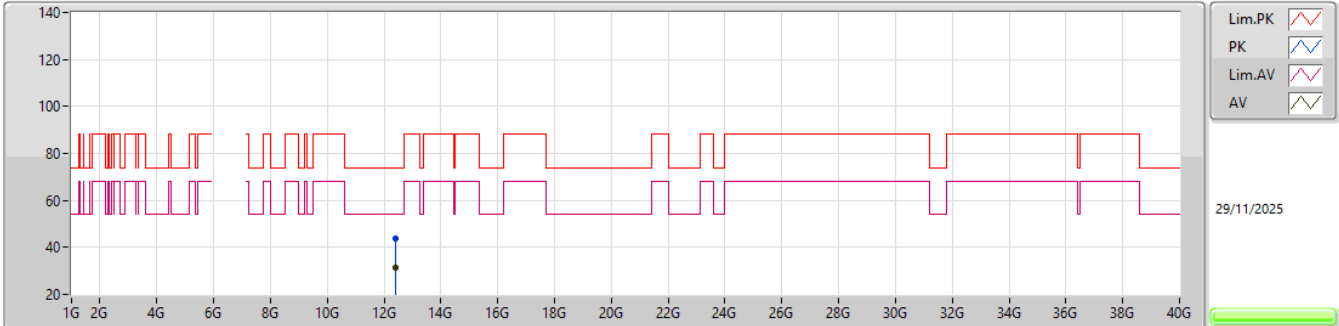


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.21016G	43.37	74.00	-30.63	58.84	3	Vertical	240.1	1.80	-	38.98	11.22	65.67			
AV	12.25971G	31.64	54.00	-22.36	47.15	3	Vertical	240.1	1.80	-	38.90	11.25	65.66			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

6185MHz_TX

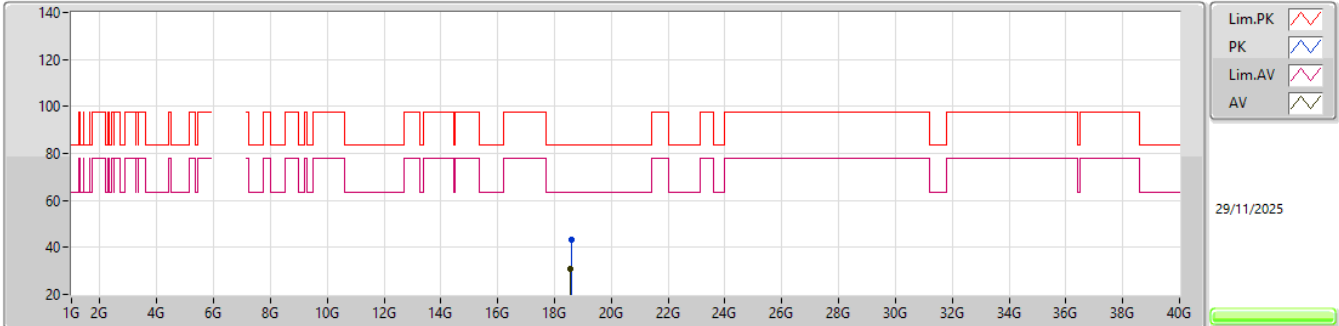


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40165G	43.59	74.00	-30.41	59.16	3	Horizontal	16	1.99	-	38.70	11.34	65.61			
AV	12.40612G	31.59	54.00	-22.41	47.16	3	Horizontal	16	1.99	-	38.69	11.34	65.60			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

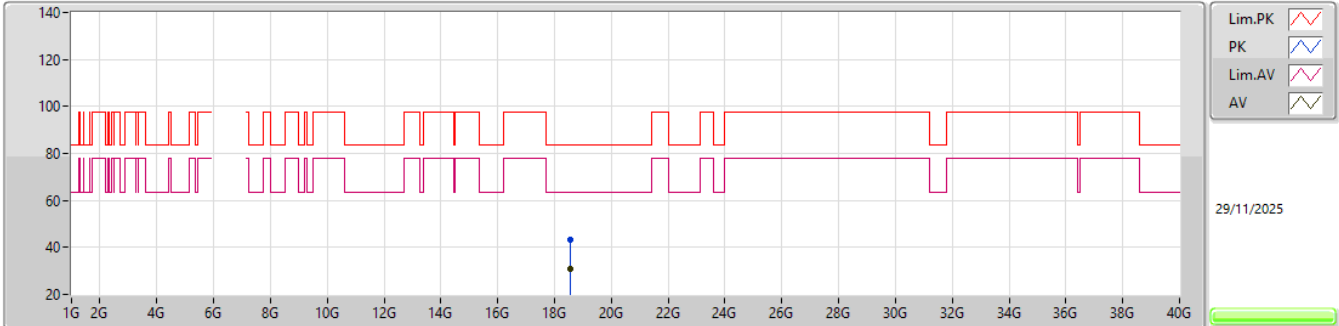
6185MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.58482G	43.02	83.54	-40.52	38.42	1	Vertical	233	1.99	-	37.67	16.58	49.65			
AV	18.56928G	30.89	63.54	-32.65	26.34	1	Vertical	233	1.99	-	37.64	16.57	49.66			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

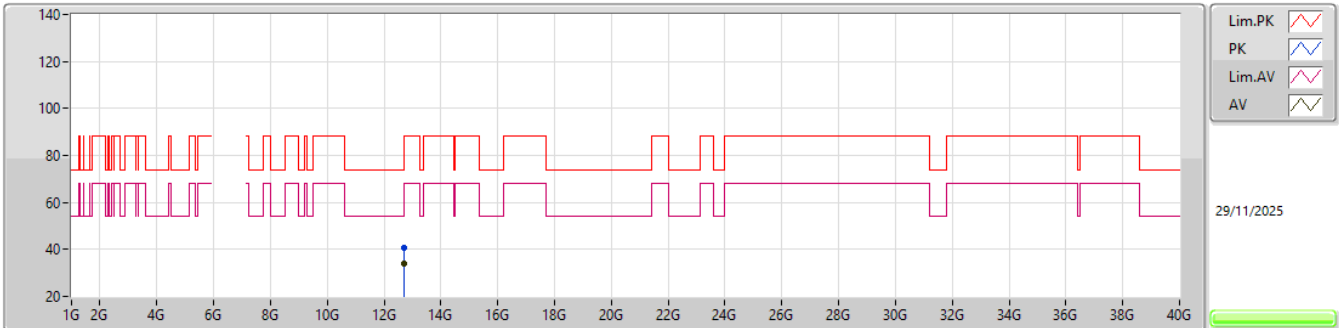
6185MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.56712G	43.35	83.54	-40.19	38.81	1	Horizontal	289	1.00	-	37.63	16.57	49.66			
AV	18.55584G	31.03	63.54	-32.51	26.53	1	Horizontal	289	1.00	-	37.61	16.56	49.67			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

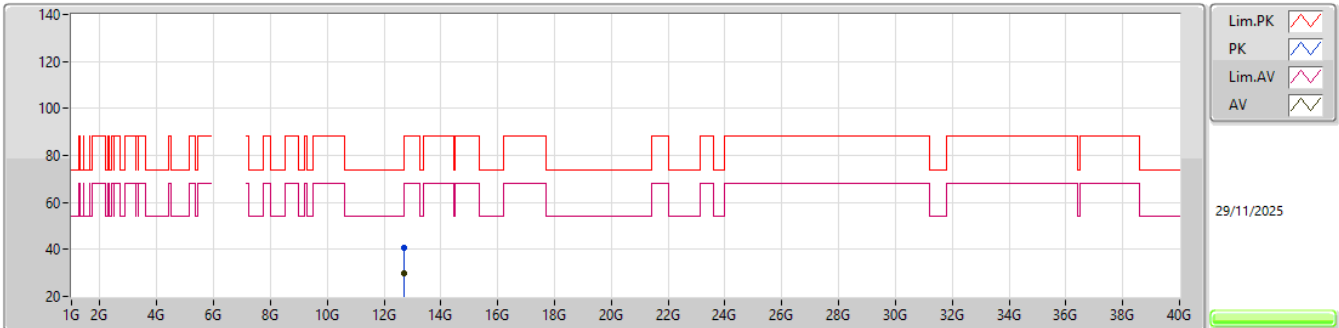
6345MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.7063G	40.80	88.20	-47.40	55.46	3	Vertical	187	2.14	-	39.10	11.53	65.29			
RMS	12.70343G	33.81	68.20	-34.39	48.47	3	Vertical	187	2.14	-	39.10	11.53	65.29			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

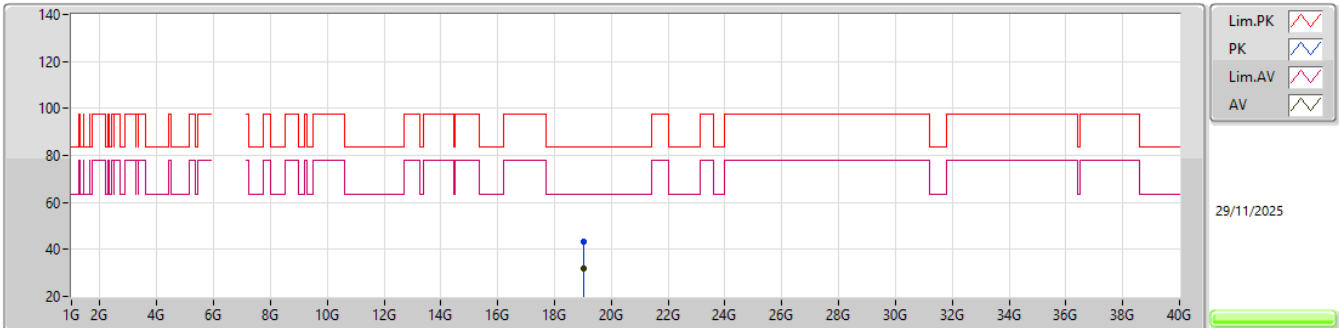
6345MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.70854G	40.60	88.20	-47.60	55.25	3	Horizontal	223	2.03	-	39.10	11.53	65.28			
RMS	12.70343G	29.99	68.20	-38.21	44.65	3	Horizontal	223	2.03	-	39.10	11.53	65.29			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

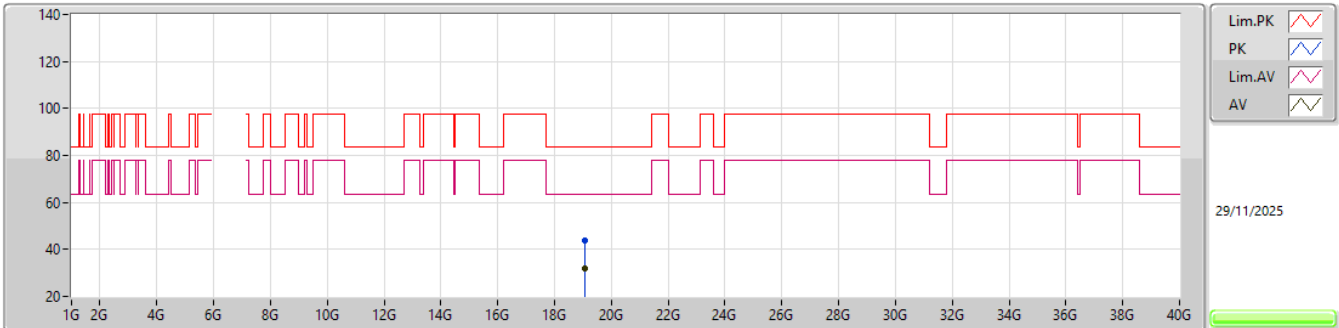
6345MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03308G	43.28	83.54	-40.26	37.93	1	Vertical	37	2.15	-	37.87	16.81	49.33			
AV	19.04184G	31.97	63.54	-31.57	26.61	1	Vertical	37	2.15	-	37.88	16.81	49.33			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

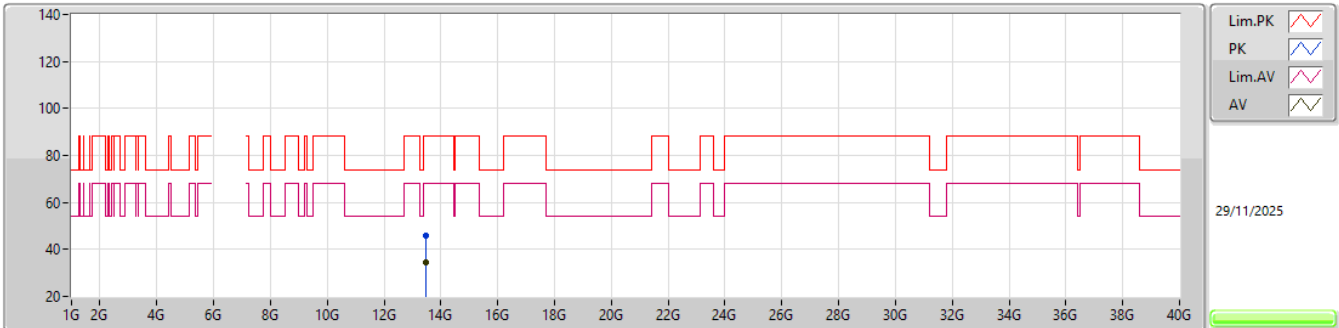
6345MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.06476G	43.66	83.54	-39.88	38.34	1	Horizontal	213	1.85	-	37.84	16.83	49.35			
AV	19.04922G	31.97	63.54	-31.57	26.59	1	Horizontal	213	1.85	-	37.90	16.82	49.34			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

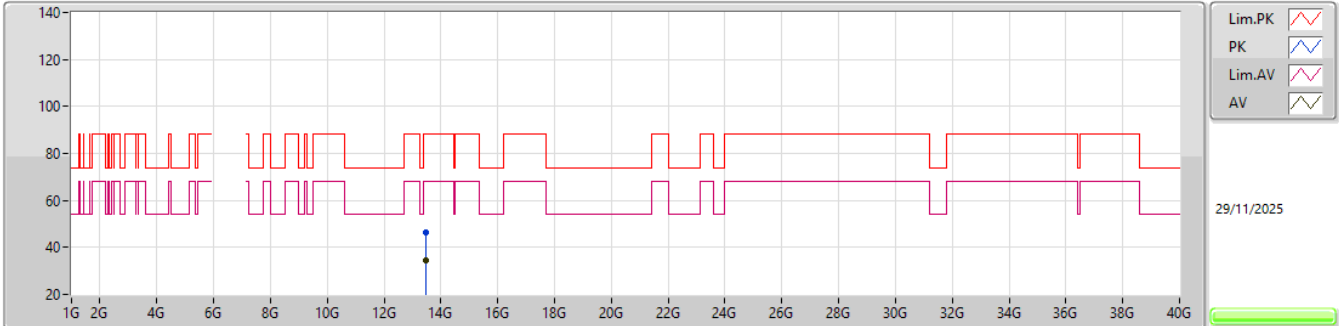
6665MHz_TX

EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.45685G	45.89	88.20	-42.31	58.62	3	Vertical	1	1.80	-	40.11	11.99	64.83			
RMS	13.45819G	34.54	68.20	-33.66	47.26	3	Vertical	1	1.80	-	40.12	11.99	64.83			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

6665MHz_TX

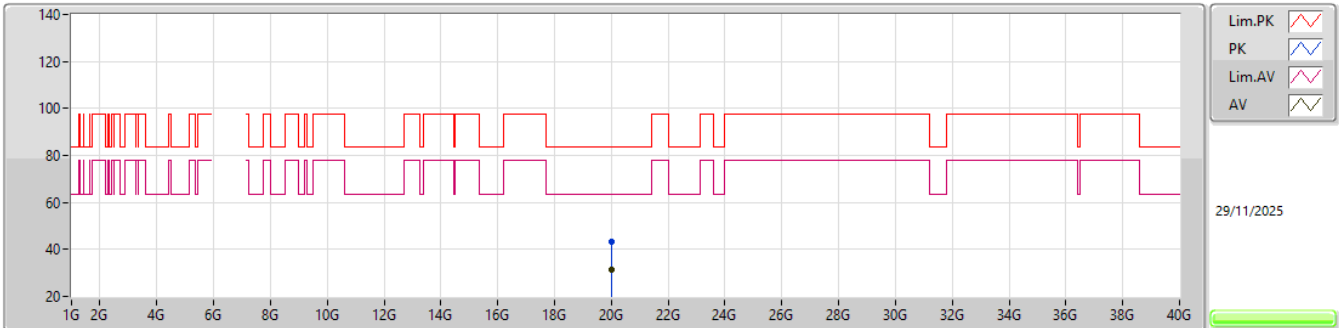


EUT_Z_1TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.45787G	46.21	88.20	-41.99	58.93	3	Horizontal	64	1.80	-	40.12	11.99	64.83			
RMS	13.46293G	34.54	68.20	-33.66	47.24	3	Horizontal	64	1.80	-	40.13	12.00	64.83			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

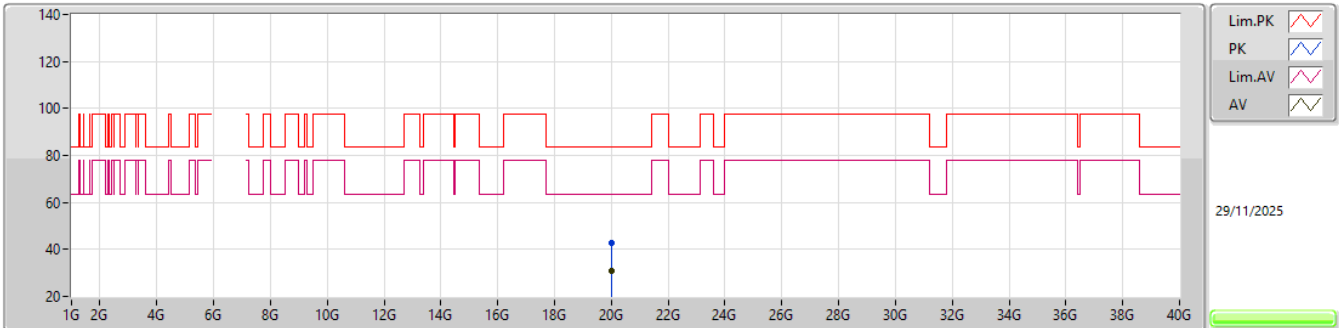
6665MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.99542G	43.08	83.54	-40.46	37.18	1	Vertical	52	1.27	-	37.79	17.37	49.26			
AV	20.01648G	31.30	63.54	-32.24	25.46	1	Vertical	52	1.27	-	37.73	17.37	49.26			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

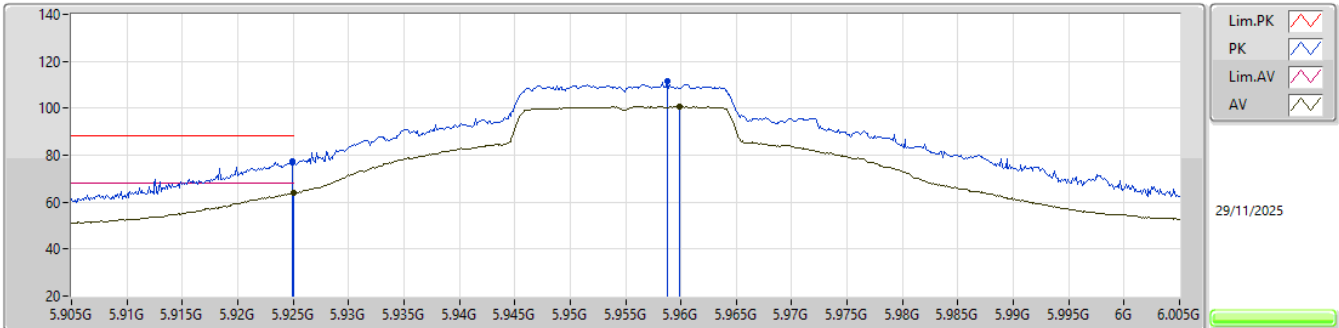
6665MHz_TX

EUT_Z_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.01654G	42.73	83.54	-40.81	36.89	1	Horizontal	94	1.51	-	37.73	17.37	49.26			
AV	20.01234G	31.09	63.54	-32.45	25.23	1	Horizontal	94	1.51	-	37.75	17.37	49.26			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

5955MHz_TX

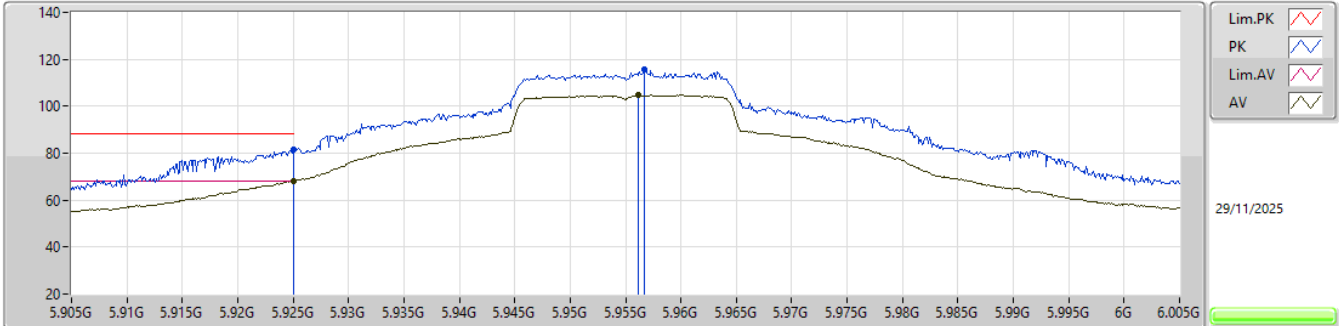


EUT_Y_2TX
SET 96

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9249G	77.31	88.20	-10.89	71.25	3	Vertical	335	2.69	-	32.25	7.57	33.76			
RMS	5.925G	64.09	68.20	-4.11	58.02	3	Vertical	335	2.69	-	32.25	7.58	33.76			
PK	5.9588G	111.47	Inf	-Inf	105.26	3	Vertical	335	2.69	-	32.32	7.64	33.75			
RMS	5.9599G	100.80	Inf	-Inf	94.59	3	Vertical	335	2.69	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

5955MHz_TX

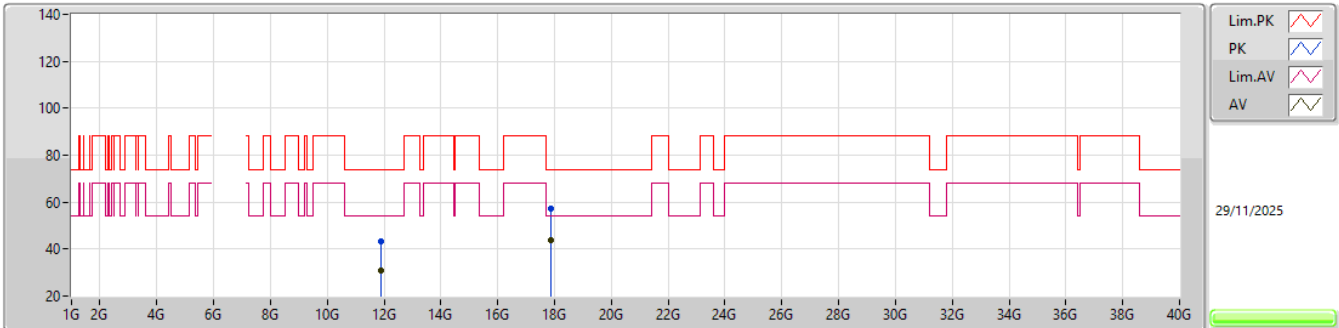


EUT_Y_2TX
SET 96

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.925G	81.49	88.20	-6.71	75.42	3	Horizontal	70	2.69	-	32.25	7.58	33.76				
RMS	5.925G	68.14	68.20	-0.06	62.07	3	Horizontal	70	2.69	-	32.25	7.58	33.76				
PK	5.9567G	115.50	Inf	-Inf	109.32	3	Horizontal	70	2.69	-	32.31	7.63	33.76				
RMS	5.9561G	104.76	Inf	-Inf	98.58	3	Horizontal	70	2.69	-	32.31	7.63	33.76				

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

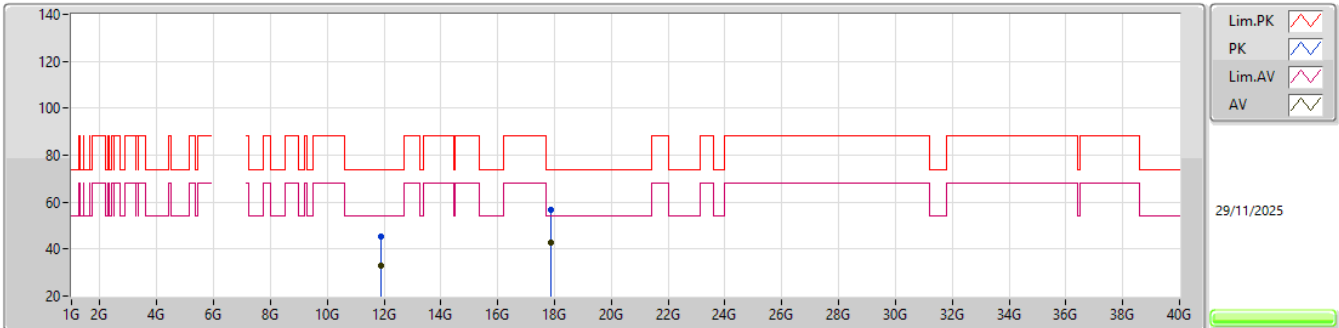
5955MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.91368G	43.21	74.00	-30.79	59.17	3	Vertical	1	1.80	-	38.80	11.07	65.83			
AV	11.90996G	30.86	54.00	-23.14	46.82	3	Vertical	1	1.80	-	38.80	11.07	65.83			
PK	17.86227G	57.05	74.00	-16.95	59.07	3	Vertical	151	2.19	-	47.27	14.73	64.02			
AV	17.87859G	43.90	54.00	-10.10	45.28	3	Vertical	151	2.19	-	47.89	14.74	64.01			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

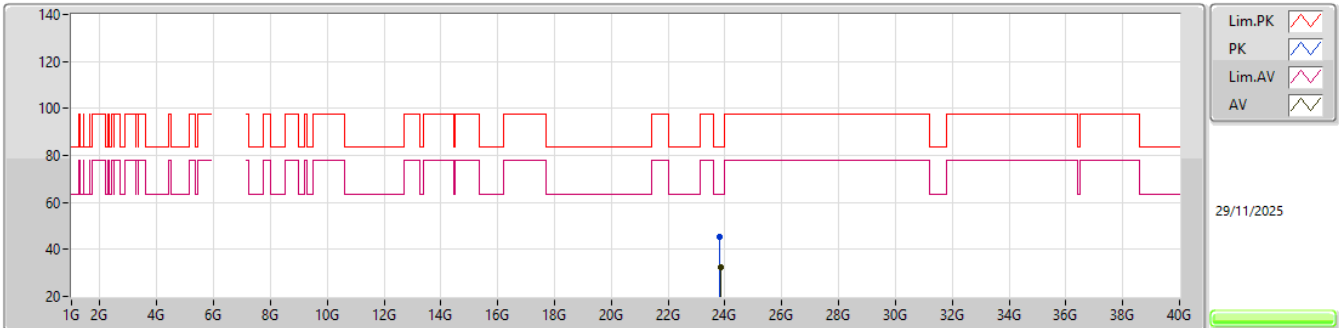
5955MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.90968G	45.15	74.00	-28.85	61.11	3	Horizontal	9	1.71	-	38.80	11.07	65.83			
AV	11.9136G	32.87	54.00	-21.13	48.83	3	Horizontal	9	1.71	-	38.80	11.07	65.83			
PK	17.85918G	56.58	74.00	-17.42	58.72	3	Horizontal	291	1.05	-	47.15	14.73	64.02			
AV	17.87661G	42.98	54.00	-11.02	44.44	3	Horizontal	291	1.05	-	47.81	14.74	64.01			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

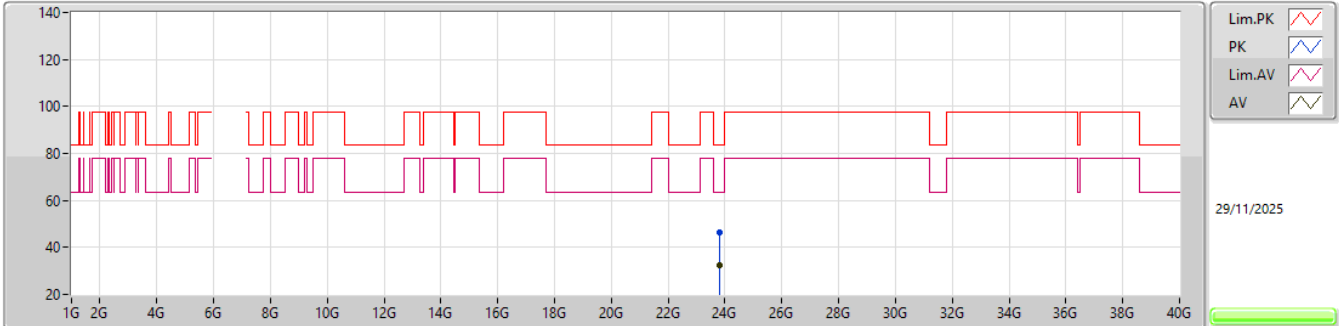
5955MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81508G	45.19	83.54	-38.35	34.84	1	Vertical	286	2.46	-	38.74	18.76	47.15			
AV	23.84964G	32.63	63.54	-30.91	22.40	1	Vertical	286	2.46	-	38.60	18.76	47.13			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

5955MHz_TX

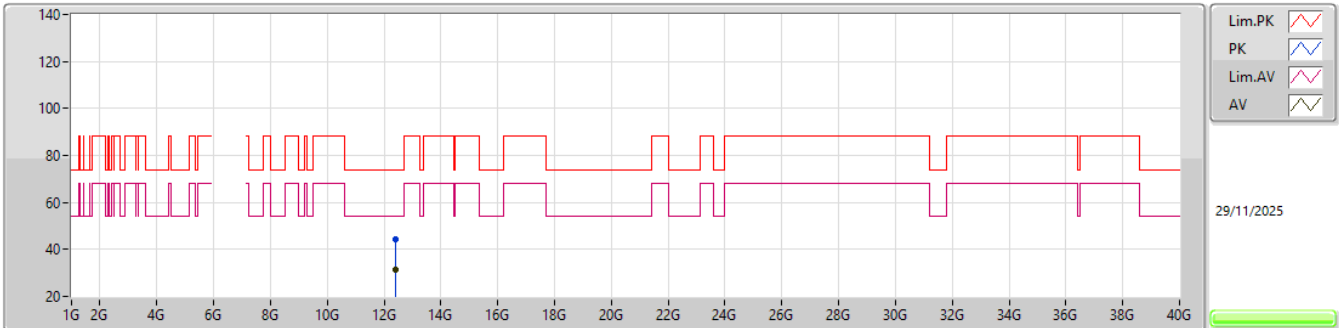


EUT Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.80518G	46.56	83.54	-36.98	36.17	1	Horizontal	250	2.94	-	38.78	18.76	47.15			
AV	23.82078G	32.53	63.54	-31.01	22.19	1	Horizontal	250	2.94	-	38.72	18.76	47.14			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

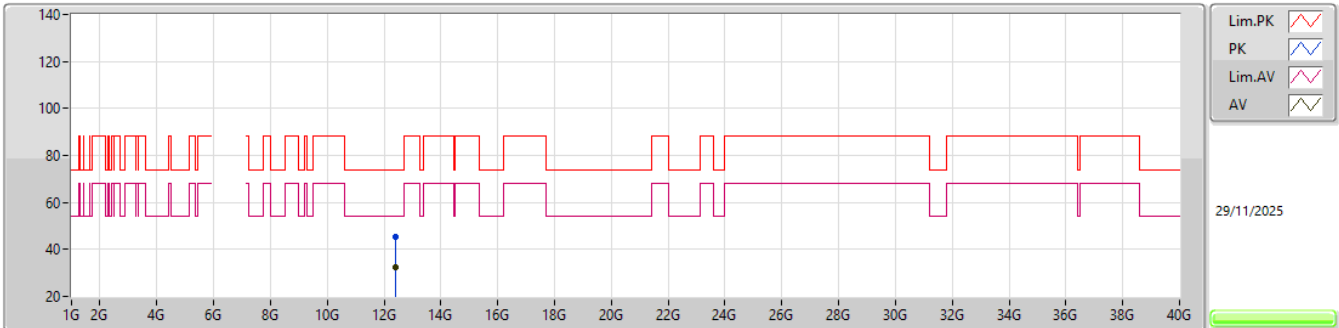
6195MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.40794G	44.23	74.00	-29.77	59.81	3	Vertical	345	1.73	-	38.68	11.34	65.60			
AV	12.38992G	31.51	54.00	-22.49	47.07	3	Vertical	345	1.73	-	38.72	11.33	65.61			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

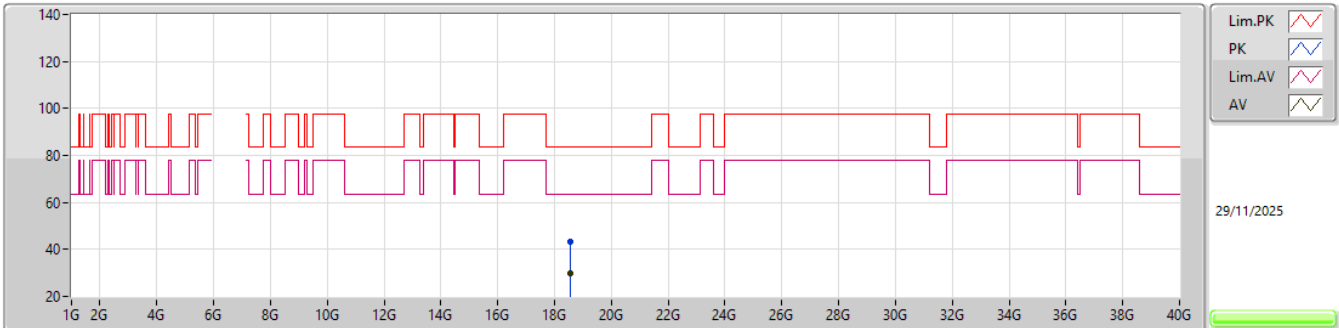
6195MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39663G	45.27	74.00	-28.73	60.83	3	Horizontal	14	1.79	-	38.71	11.34	65.61			
AV	12.39024G	32.62	54.00	-21.38	48.18	3	Horizontal	14	1.79	-	38.72	11.33	65.61			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

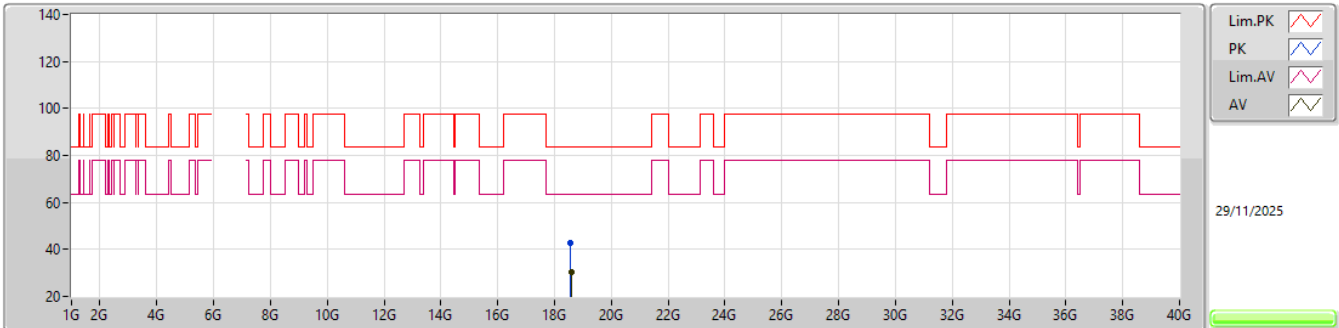
6195MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.55692G	43.06	83.54	-40.48	38.56	1	Vertical	254	2.25	-	37.61	16.56	49.67			
AV	18.56448G	29.98	63.54	-33.56	25.45	1	Vertical	254	2.25	-	37.63	16.57	49.67			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

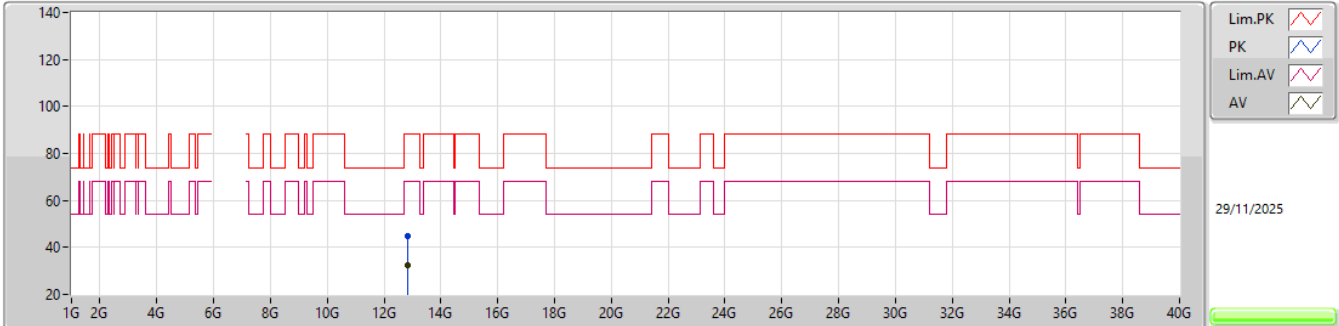
6195MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.57588G	42.58	83.54	-40.96	38.02	1	Horizontal	316	1.74	-	37.65	16.57	49.66			
AV	18.59766G	30.18	63.54	-33.36	25.54	1	Horizontal	316	1.74	-	37.70	16.58	49.64			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

6415MHz_TX

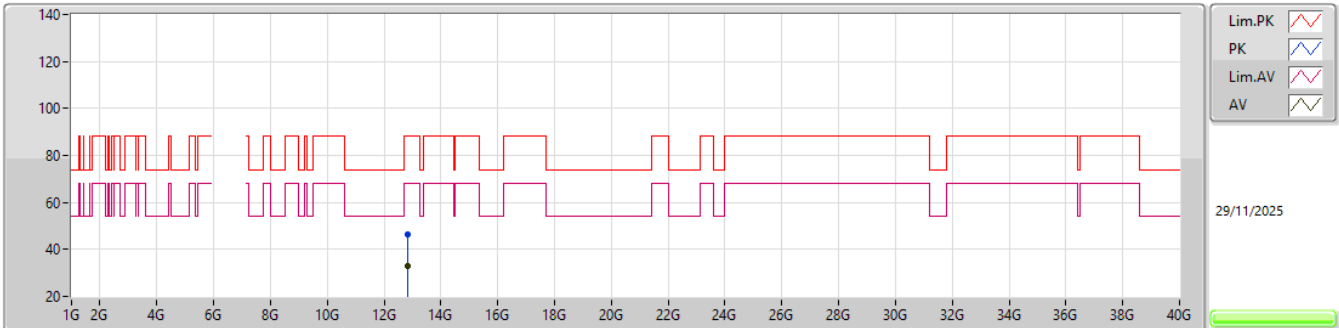


EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81845G	44.96	88.20	-43.24	59.05	3	Vertical	1	1.82	-	39.44	11.60	65.13			
RMS	12.82976G	32.42	68.20	-35.78	46.47	3	Vertical	1	1.82	-	39.46	11.60	65.11			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

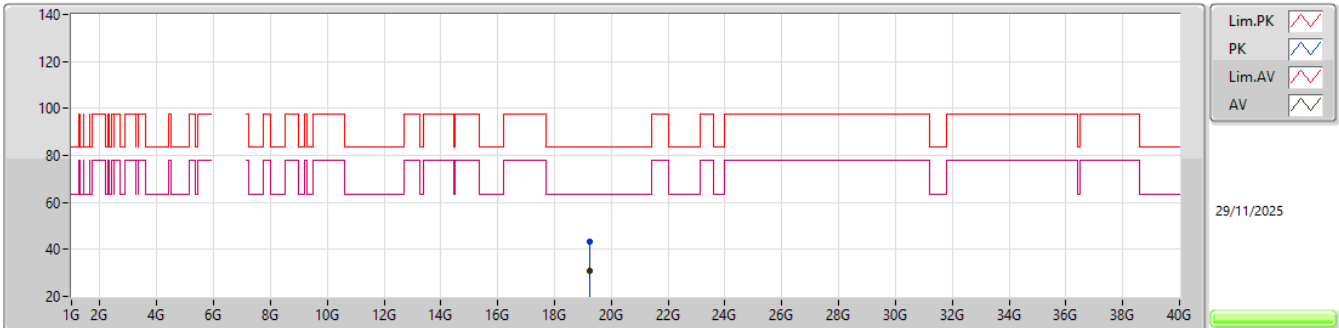
6415MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.8284G	46.30	88.20	-41.90	60.36	3	Horizontal	1	1.80	-	39.46	11.60	65.12			
RMS	12.83116G	32.78	68.20	-35.42	46.82	3	Horizontal	1	1.80	-	39.46	11.61	65.11			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

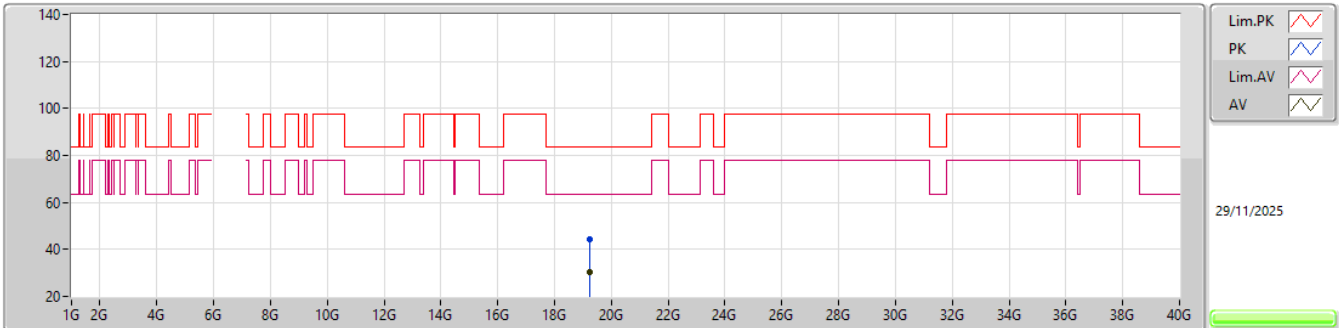
6415MHz_TX

EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.24746G	43.48	83.54	-40.06	38.11	1	Vertical	11	1.35	-	37.89	16.93	49.45			
AV	19.25424G	30.61	63.54	-32.93	25.25	1	Vertical	11	1.35	-	37.88	16.94	49.46			

5.925-6.425GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

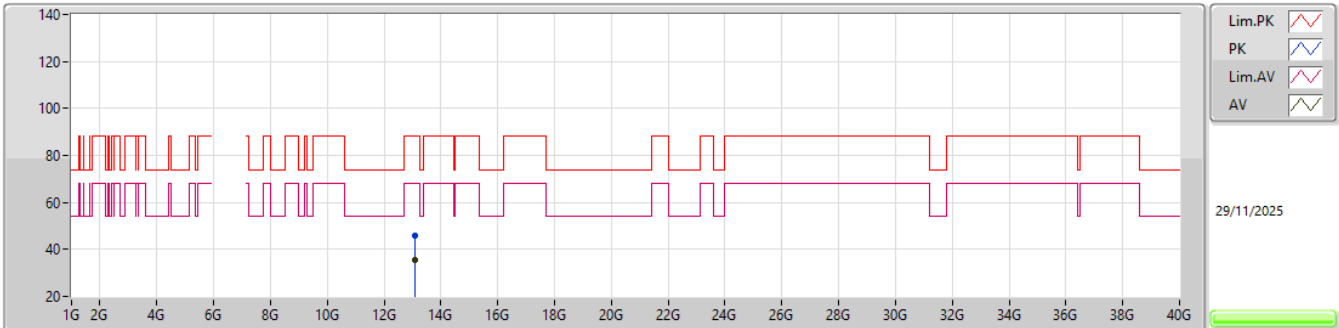
6415MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.25796G	44.18	83.54	-39.36	38.83	1	Horizontal	311	1.58	-	37.87	16.94	49.46			
AV	19.25316G	30.59	63.54	-32.95	25.22	1	Horizontal	311	1.58	-	37.89	16.94	49.46			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

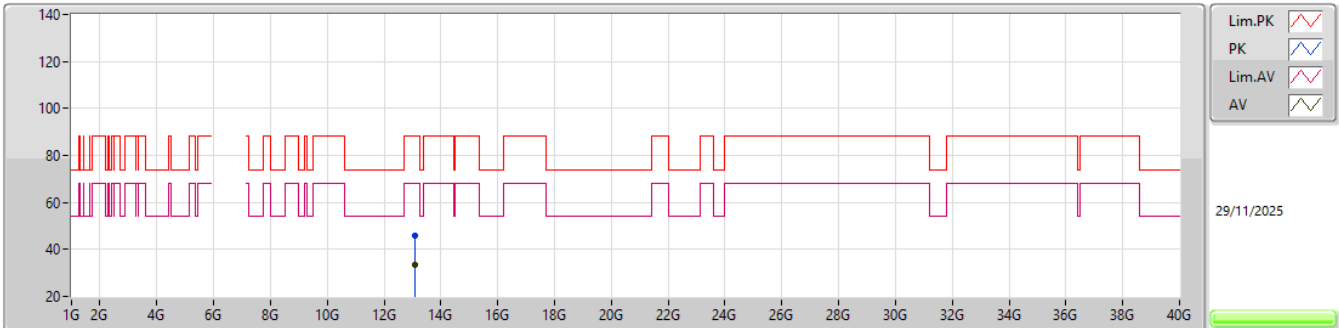
6535MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06988G	46.11	88.20	-42.09	59.93	3	Vertical	349	1.89	-	39.30	11.75	64.87			
RMS	13.06984G	35.58	68.20	-32.62	49.40	3	Vertical	349	1.89	-	39.30	11.75	64.87			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

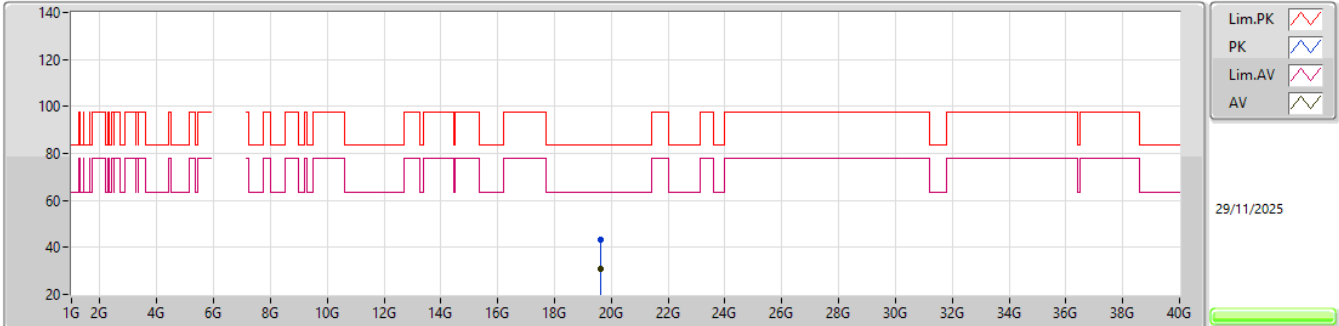
6535MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.07176G	45.76	88.20	-42.44	59.58	3	Horizontal	20	1.80	-	39.30	11.75	64.87			
RMS	13.06964G	33.40	68.20	-34.80	47.22	3	Horizontal	20	1.80	-	39.30	11.75	64.87			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

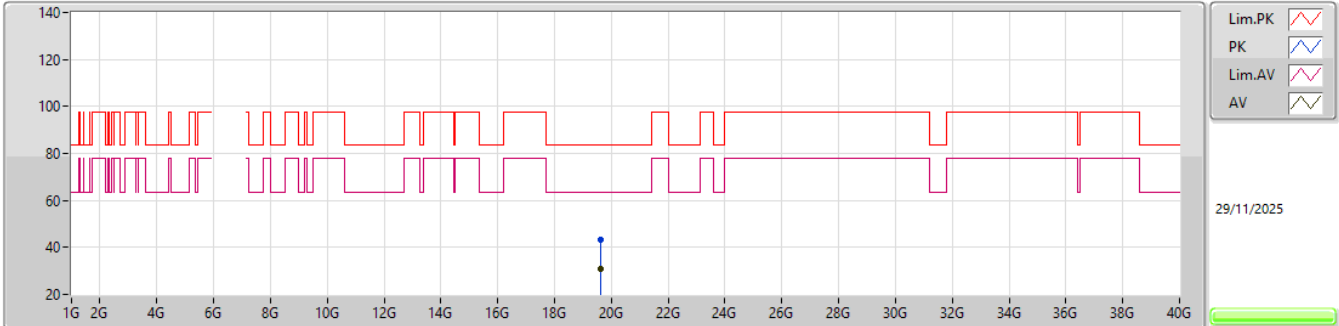
6535MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63332G	43.26	83.54	-40.28	37.98	1	Vertical	269	1.26	-	37.63	17.16	49.51			
AV	19.61814G	30.65	63.54	-32.89	25.36	1	Vertical	269	1.26	-	37.66	17.15	49.52			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

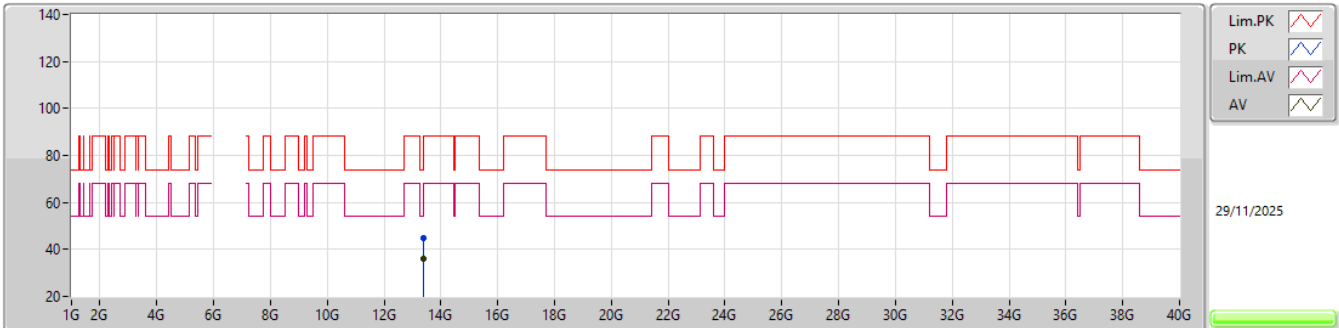
6535MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6125G	43.46	83.54	-40.08	38.15	1	Horizontal	310	2.27	-	37.68	17.15	49.52			
AV	19.6104G	30.67	63.54	-32.87	25.37	1	Horizontal	310	2.27	-	37.68	17.14	49.52			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

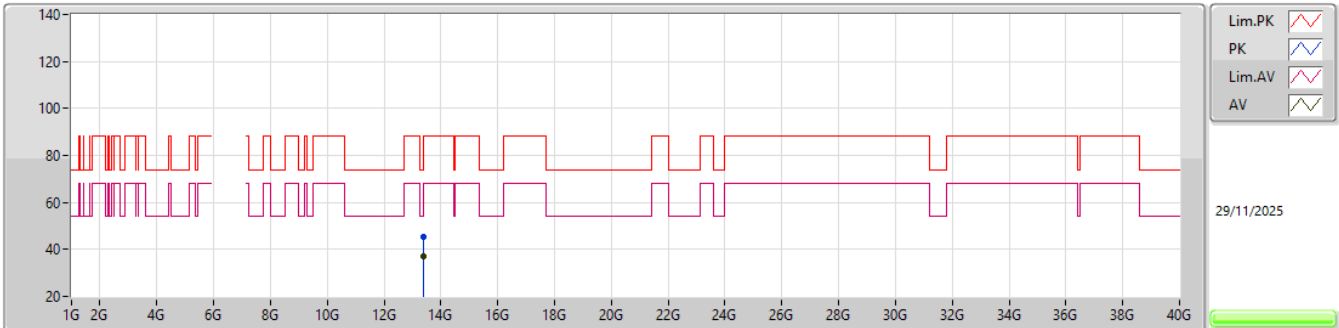
6695MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.39008G	44.66	74.00	-29.34	57.47	3	Vertical	356	2.28	-	40.08	11.95	64.84			
AV	13.38988G	36.22	54.00	-17.78	49.03	3	Vertical	356	2.28	-	40.08	11.95	64.84			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

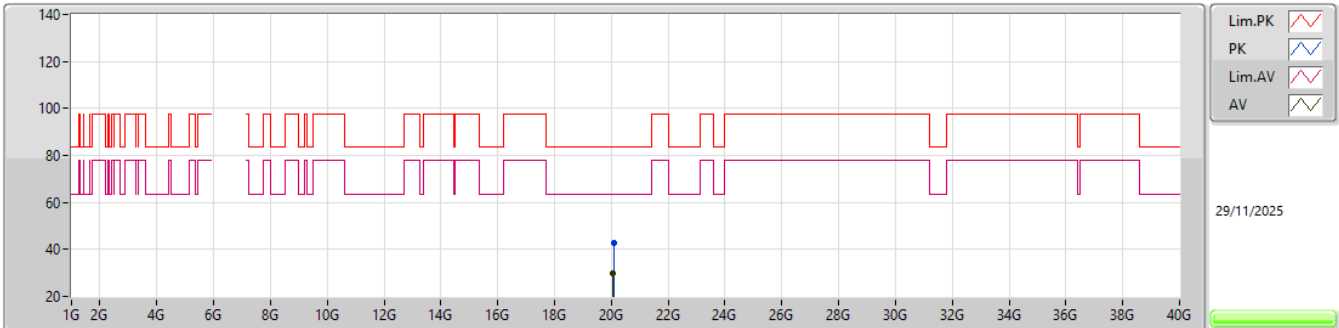
6695MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.38976G	45.55	74.00	-28.45	58.36	3	Horizontal	9	1.91	-	40.08	11.95	64.84			
AV	13.38988G	37.01	54.00	-16.99	49.82	3	Horizontal	9	1.91	-	40.08	11.95	64.84			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

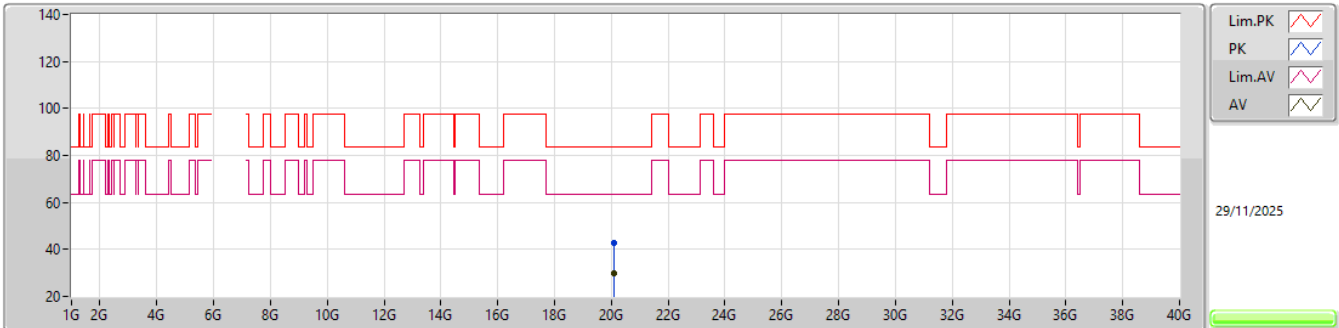
6695MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.08686G	42.80	83.54	-40.74	37.00	1	Vertical	45	1.86	-	37.67	17.38	49.25			
AV	20.05938G	29.86	63.54	-33.68	24.12	1	Vertical	45	1.86	-	37.62	17.38	49.26			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

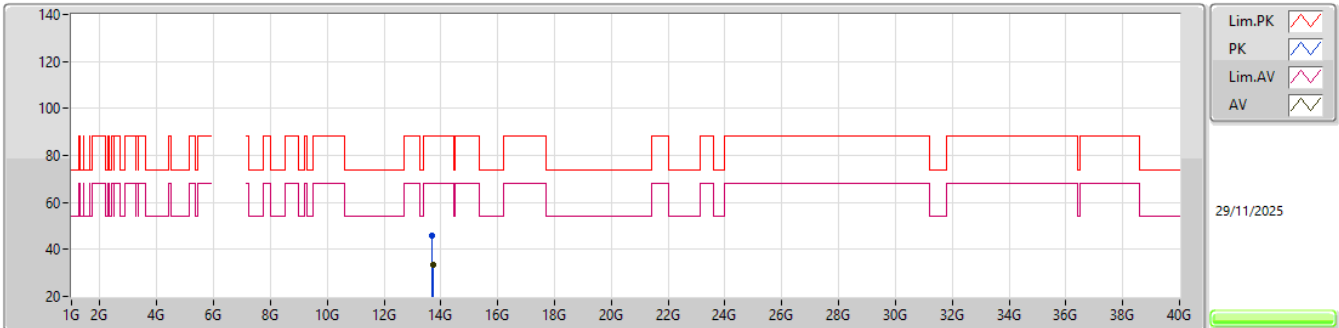
6695MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.09904G	42.77	83.54	-40.77	36.94	1	Horizontal	53	1.60	-	37.70	17.38	49.25			
AV	20.10972G	29.86	63.54	-33.68	24.02	1	Horizontal	53	1.60	-	37.70	17.39	49.25			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

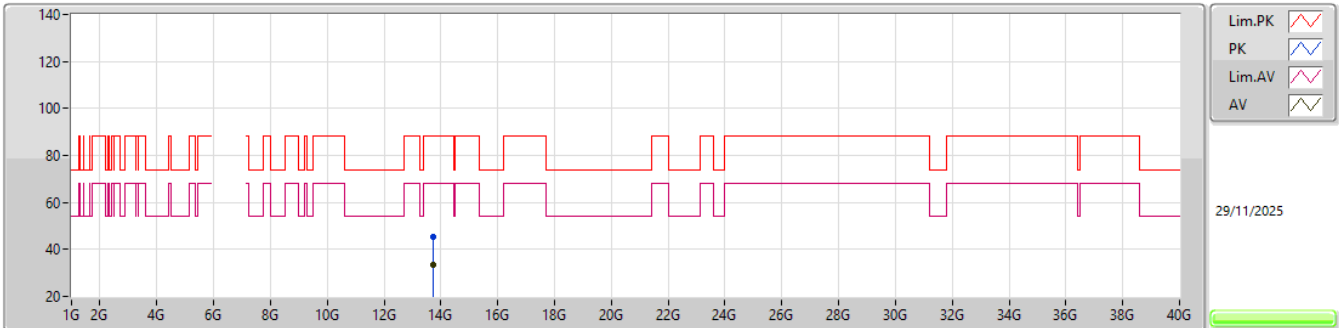
6855MHz_TX

EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.70022G	45.77	88.20	-42.43	58.17	3	Vertical	25	1.08	-	40.20	12.14	64.74			
RMS	13.71441G	33.38	68.20	-34.82	45.76	3	Vertical	25	1.08	-	40.20	12.15	64.73			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

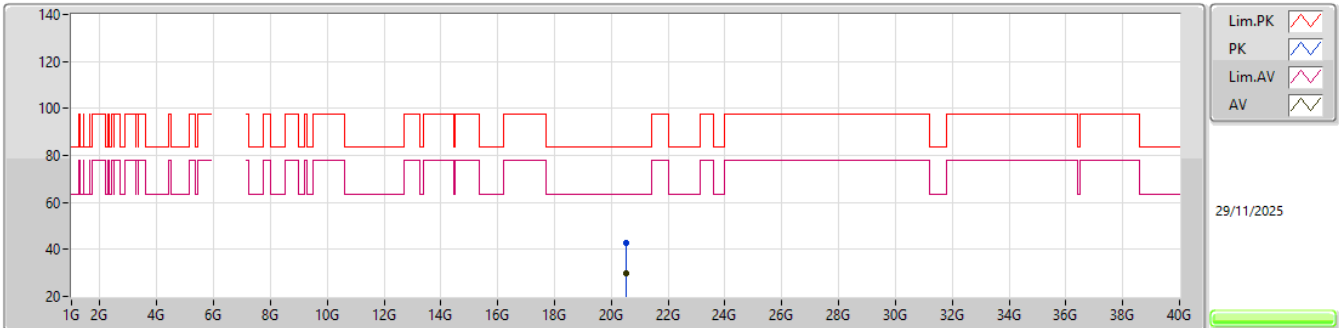
6855MHz_TX

EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.71783G	45.58	88.20	-42.62	57.95	3	Horizontal	199	2.80	-	40.20	12.16	64.73			
RMS	13.71105G	33.26	68.20	-34.94	45.64	3	Horizontal	199	2.80	-	40.20	12.15	64.73			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

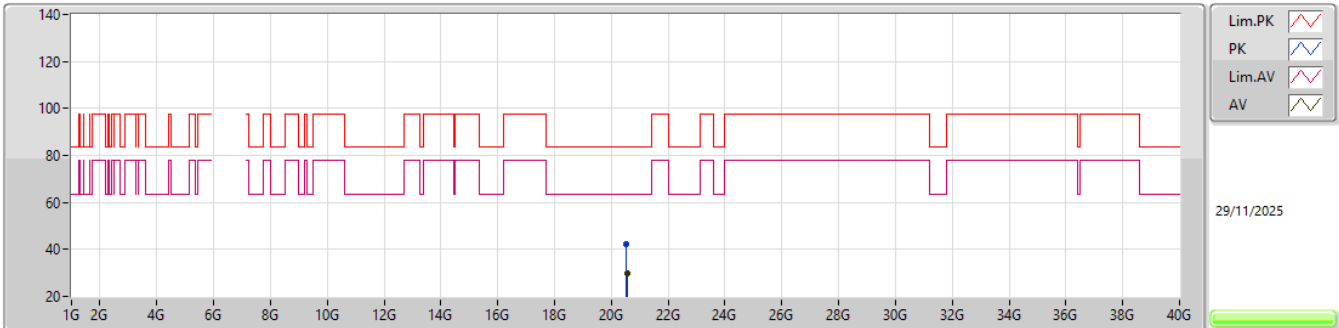
6855MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.5401G	42.62	83.54	-40.92	36.68	1	Vertical	30	2.94	-	37.70	17.45	49.21			
AV	20.53914G	29.89	63.54	-33.65	23.95	1	Vertical	30	2.94	-	37.70	17.45	49.21			

6.525-6.875GHz_802.11ax HEW20_Nss2,(MCS0)_2TX

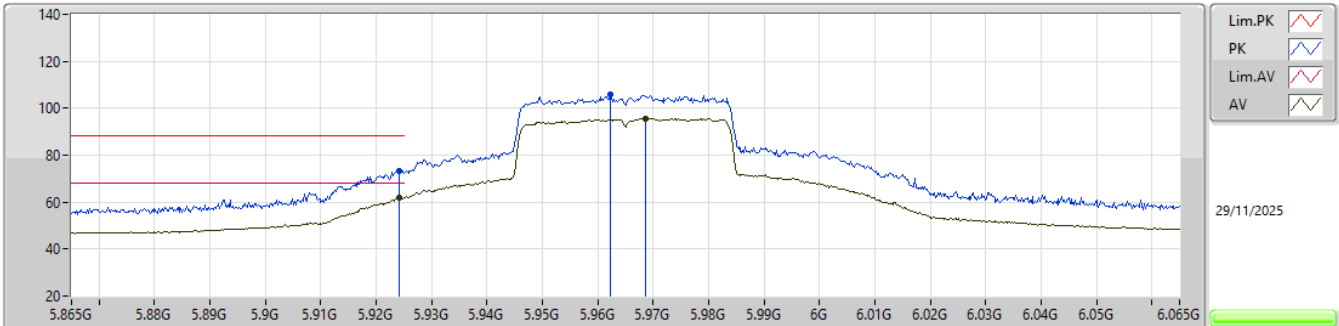
6855MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.54064G	42.45	83.54	-41.09	36.51	1	Horizontal	227	2.61	-	37.70	17.45	49.21			
AV	20.54508G	29.85	63.54	-33.69	23.91	1	Horizontal	227	2.61	-	37.70	17.45	49.21			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

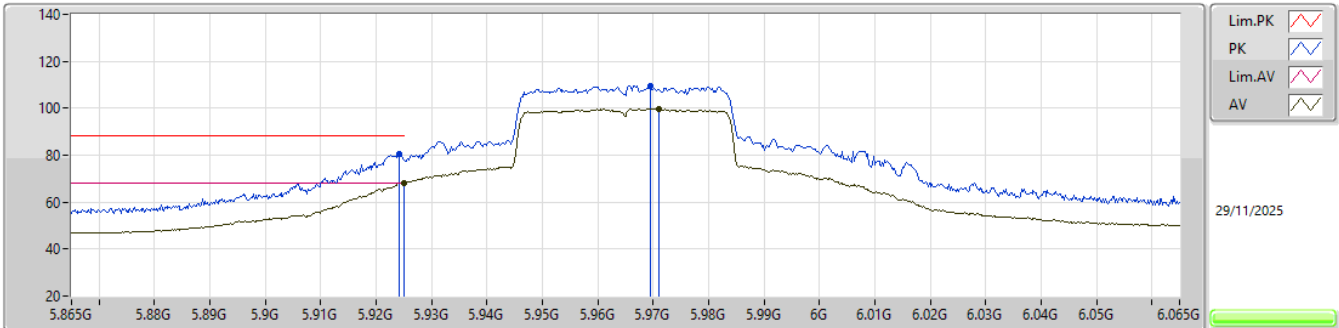
5965MHz_TX

EUT_Y_2TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9242G	73.32	88.20	-14.88	67.26	3	Vertical	335	2.45	-	32.25	7.57	33.76			
RMS	5.9242G	61.77	68.20	-6.43	55.71	3	Vertical	335	2.45	-	32.25	7.57	33.76			
PK	5.9622G	105.82	Inf	-Inf	99.61	3	Vertical	335	2.45	-	32.32	7.64	33.75			
RMS	5.9686G	95.71	Inf	-Inf	89.47	3	Vertical	335	2.45	-	32.34	7.65	33.75			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

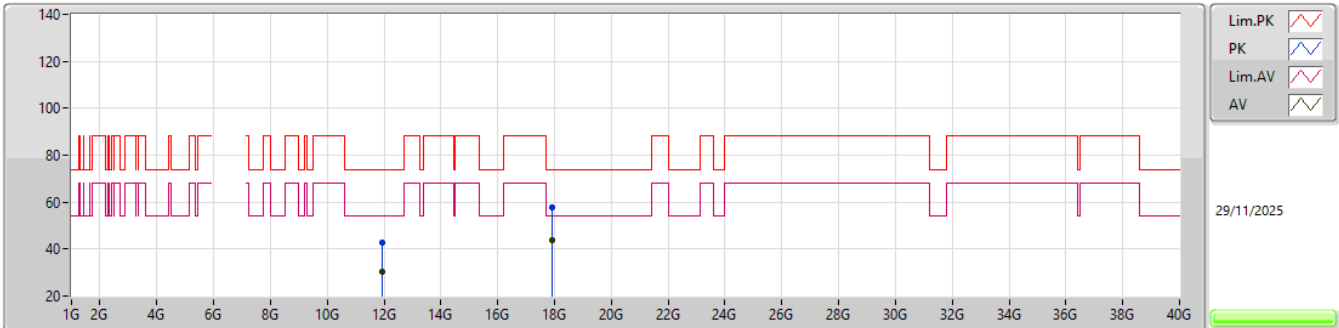
5965MHz_TX

EUT_Y_2TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9242G	80.48	88.20	-7.72	74.42	3	Horizontal	70	2.70	-	32.25	7.57	33.76			
RMS	5.925G	68.14	68.20	-0.06	62.07	3	Horizontal	70	2.70	-	32.25	7.58	33.76			
PK	5.9694G	109.72	Inf	-Inf	103.48	3	Horizontal	70	2.70	-	32.34	7.65	33.75			
RMS	5.971G	99.84	Inf	-Inf	93.59	3	Horizontal	70	2.70	-	32.34	7.66	33.75			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

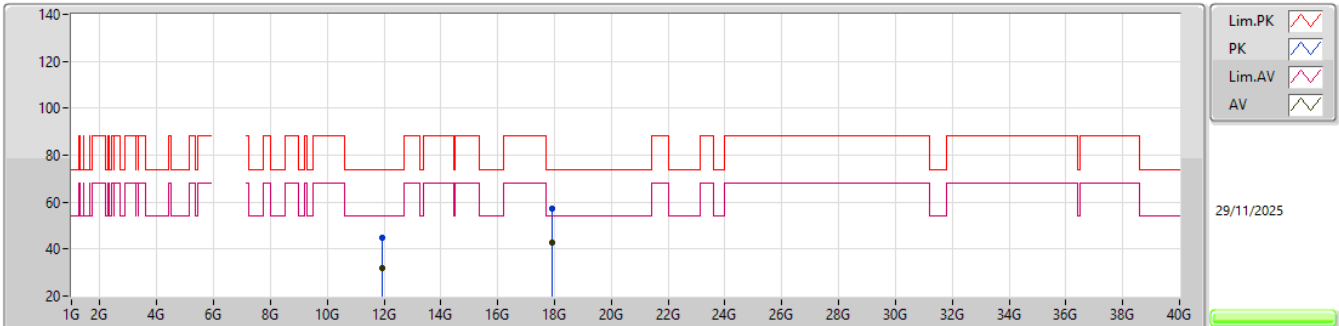
5965MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92848G	42.59	74.00	-31.41	58.53	3	Vertical	1	1.97	-	38.80	11.07	65.81			
AV	11.93336G	30.48	54.00	-23.52	46.42	3	Vertical	1	1.97	-	38.80	11.07	65.81			
PK	17.89602G	57.58	74.00	-16.42	58.28	3	Vertical	262	2.05	-	48.55	14.75	64.00			
AV	17.90889G	43.65	54.00	-10.35	43.80	3	Vertical	262	2.05	-	49.09	14.75	63.99			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

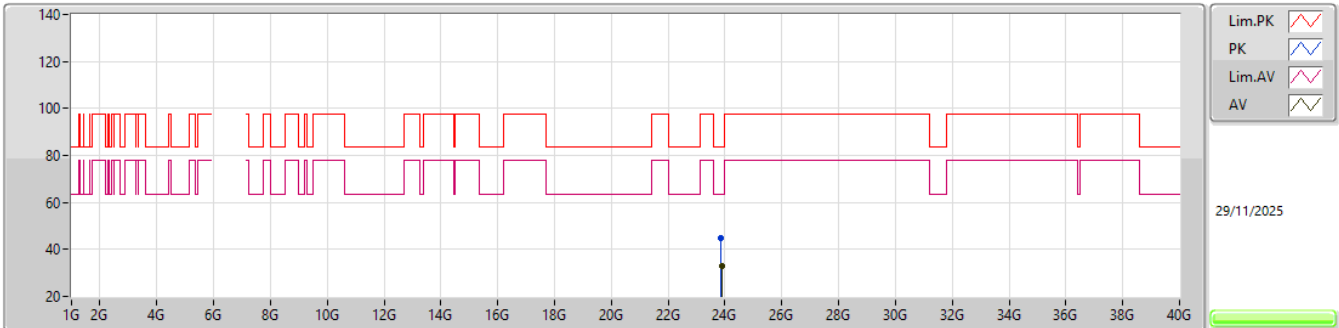
5965MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.9328G	44.85	74.00	-29.15	60.79	3	Horizontal	356	2.00	-	38.80	11.07	65.81			
AV	11.92984G	31.86	54.00	-22.14	47.80	3	Horizontal	356	2.00	-	38.80	11.07	65.81			
PK	17.90565G	57.34	74.00	-16.66	57.63	3	Horizontal	100	2.01	-	48.95	14.75	63.99			
AV	17.90877G	42.56	54.00	-11.44	42.71	3	Horizontal	100	2.01	-	49.09	14.75	63.99			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

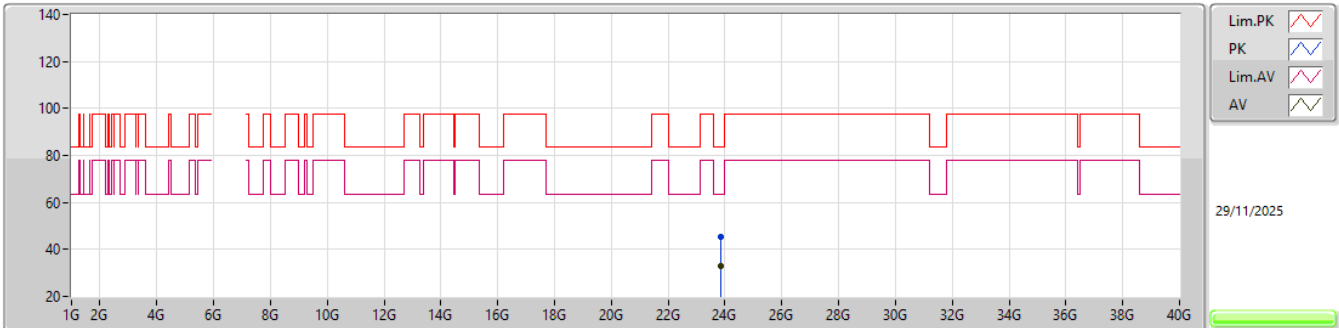
5965MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	23.86096G	44.84	83.54	-38.70	34.58	1	Vertical	60	1.68	-	38.62	18.76	47.12			
AV	23.88532G	32.83	63.54	-30.71	22.51	1	Vertical	60	1.68	-	38.67	18.76	47.11			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

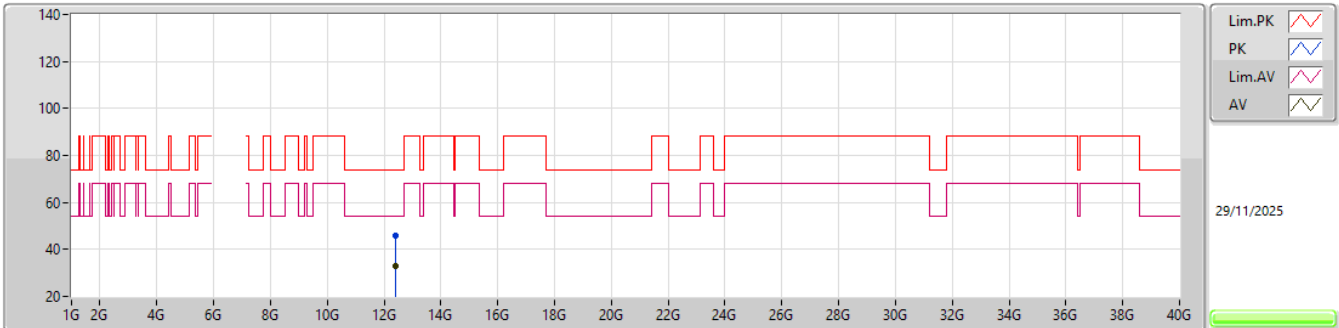
5965MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	23.84236G	45.16	83.54	-38.38	34.90	1	Horizontal	358	2.28	-	38.63	18.76	47.13			
AV	23.85004G	32.87	63.54	-30.67	22.64	1	Horizontal	358	2.28	-	38.60	18.76	47.13			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

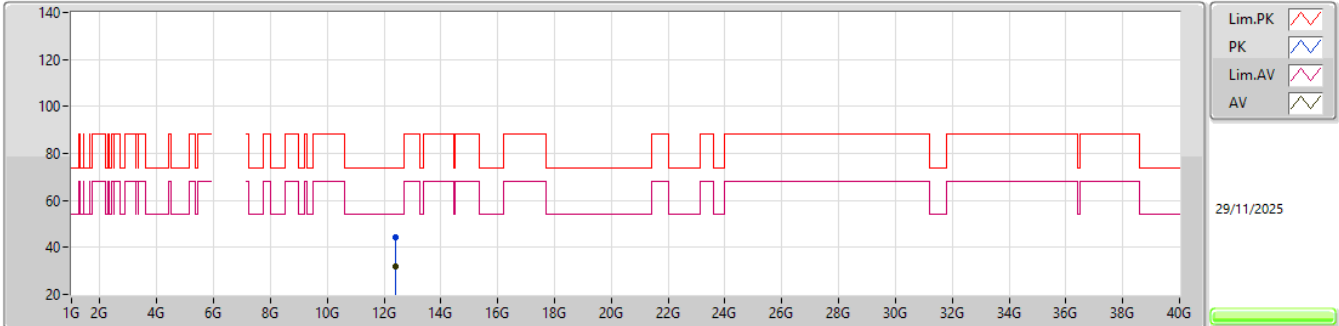
6205MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40521G	46.03	74.00	-27.97	61.60	3	Vertical	340	2.57	-	38.69	11.34	65.60			
AV	12.41488G	32.84	54.00	-21.16	48.42	3	Vertical	340	2.57	-	38.67	11.35	65.60			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

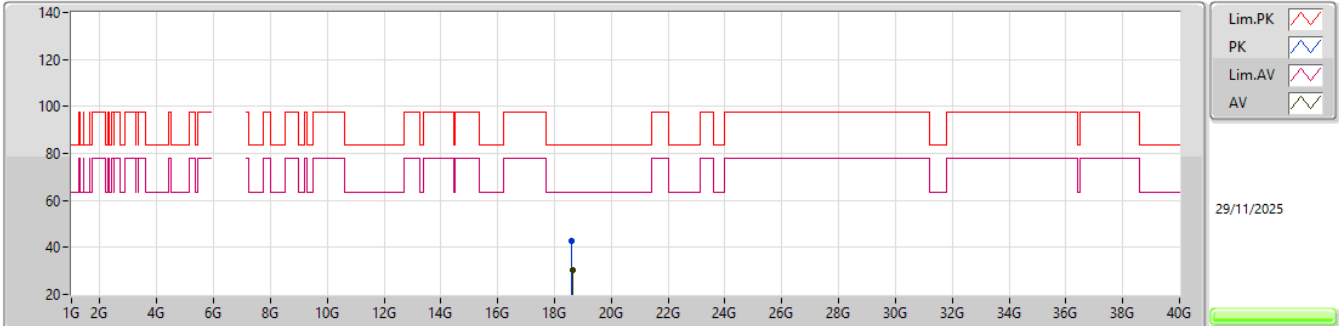
6205MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.40537G	44.45	74.00	-29.55	60.02	3	Horizontal	17	1.80	-	38.69	11.34	65.60			
AV	12.41536G	32.06	54.00	-21.94	47.64	3	Horizontal	17	1.80	-	38.67	11.35	65.60			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

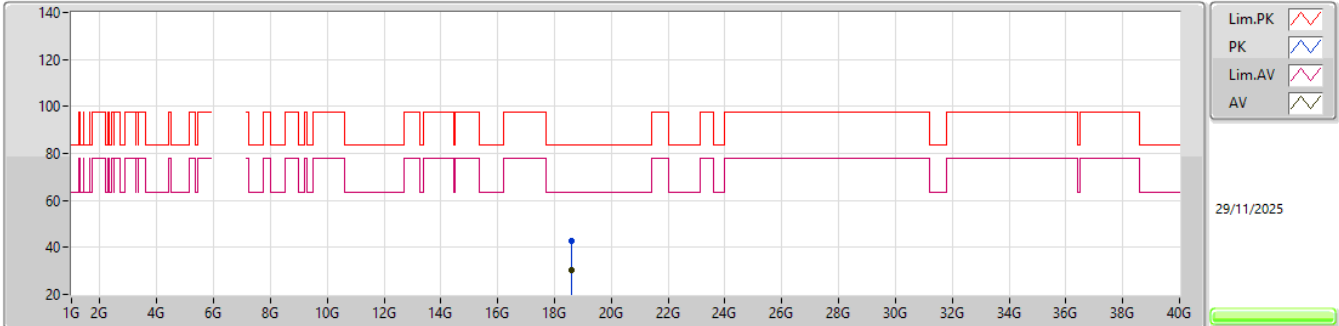
6205MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.597G	42.57	83.54	-40.97	37.94	1	Vertical	96	1.52	-	37.69	16.58	49.64			
AV	18.64332G	30.37	63.54	-33.17	25.66	1	Vertical	96	1.52	-	37.70	16.61	49.60			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

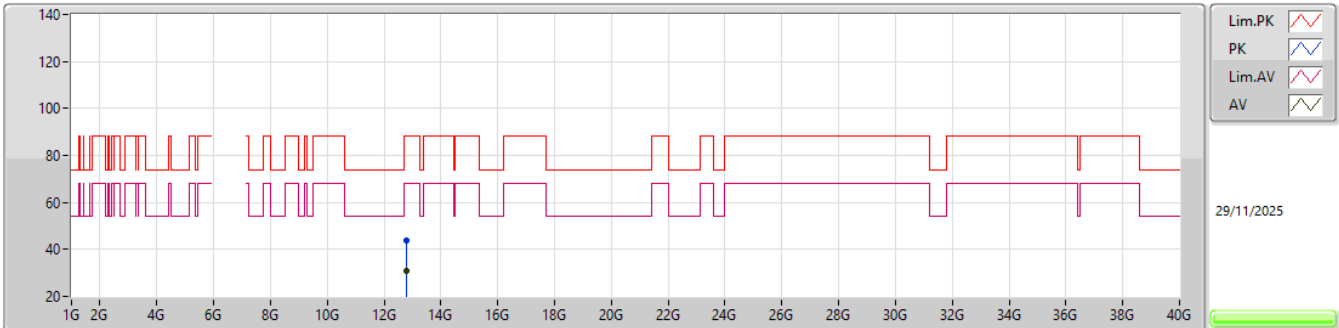
6205MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.60114G	42.85	83.54	-40.69	38.20	1	Horizontal	150	2.79	-	37.70	16.59	49.64			
AV	18.60018G	30.32	63.54	-33.22	25.67	1	Horizontal	150	2.79	-	37.70	16.59	49.64			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

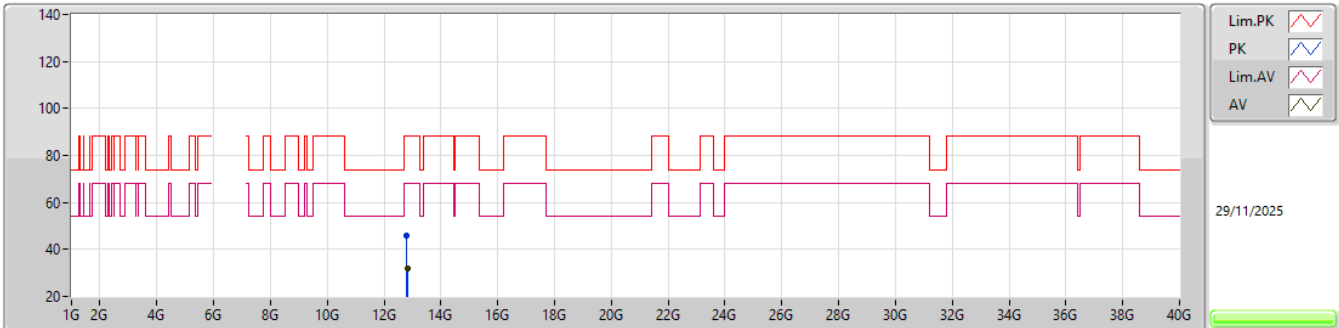
6405MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80968G	43.63	88.20	-44.57	57.76	3	Vertical	1	1.80	-	39.42	11.59	65.14			
RMS	12.80984G	31.12	68.20	-37.08	45.25	3	Vertical	1	1.80	-	39.42	11.59	65.14			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

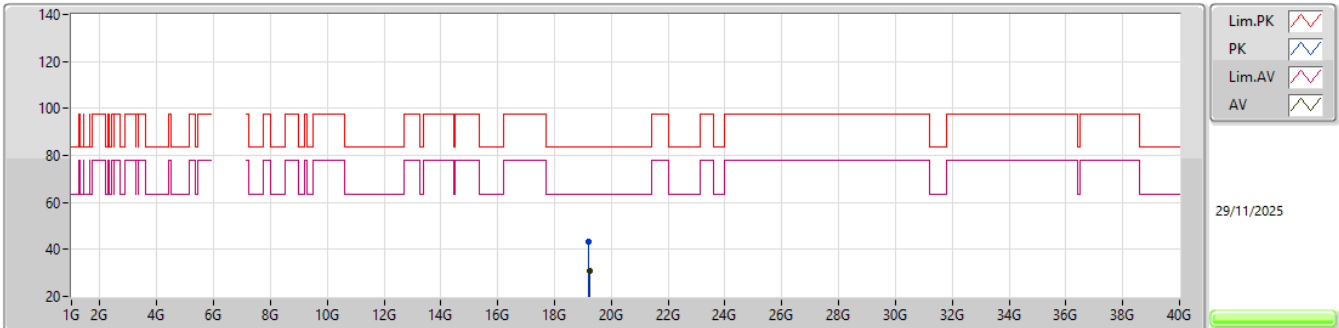
6405MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80856G	45.80	88.20	-42.40	59.93	3	Horizontal	2	1.74	-	39.42	11.59	65.14			
RMS	12.81184G	31.83	68.20	-36.37	45.96	3	Horizontal	2	1.74	-	39.42	11.59	65.14			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

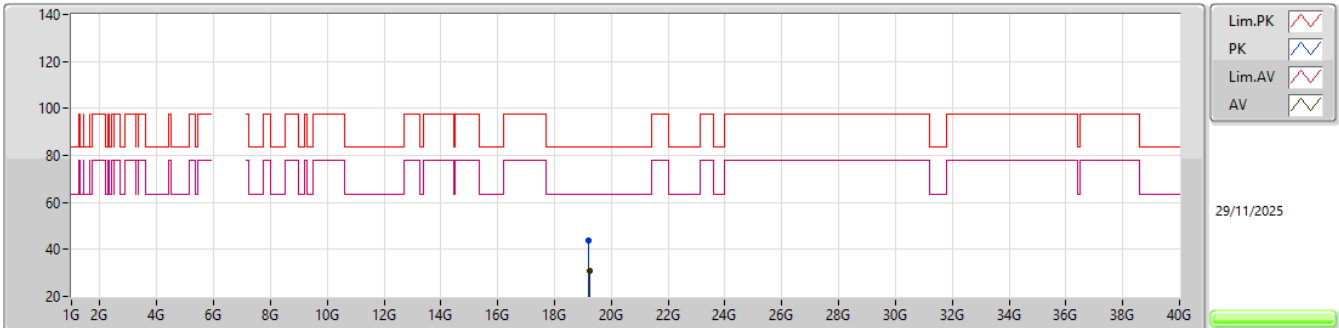
6405MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21464G	43.06	83.54	-40.48	37.82	1	Vertical	217	1.58	-	37.76	16.91	49.43			
AV	19.24176G	30.84	63.54	-32.70	25.49	1	Vertical	217	1.58	-	37.87	16.93	49.45			

5.925-6.425GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

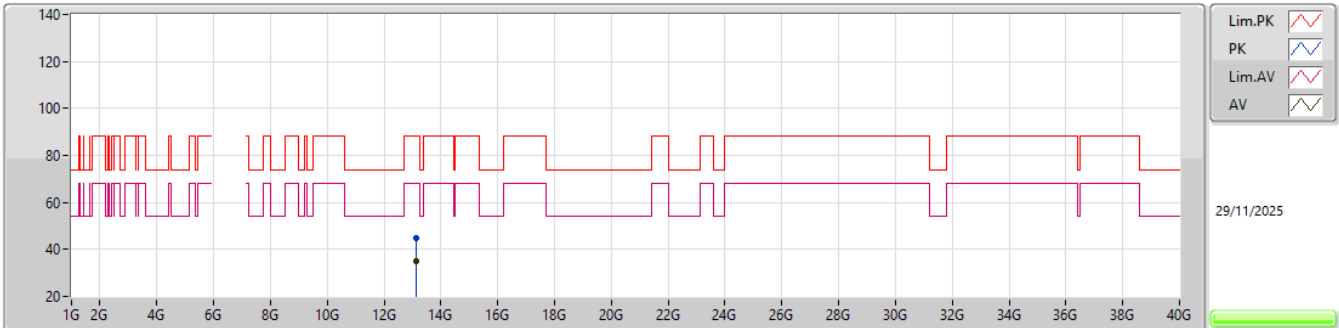
6405MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21224G	43.57	83.54	-39.97	38.34	1	Horizontal	17	2.07	-	37.75	16.91	49.43			
AV	19.2201G	30.86	63.54	-32.68	25.60	1	Horizontal	17	2.07	-	37.78	16.92	49.44			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

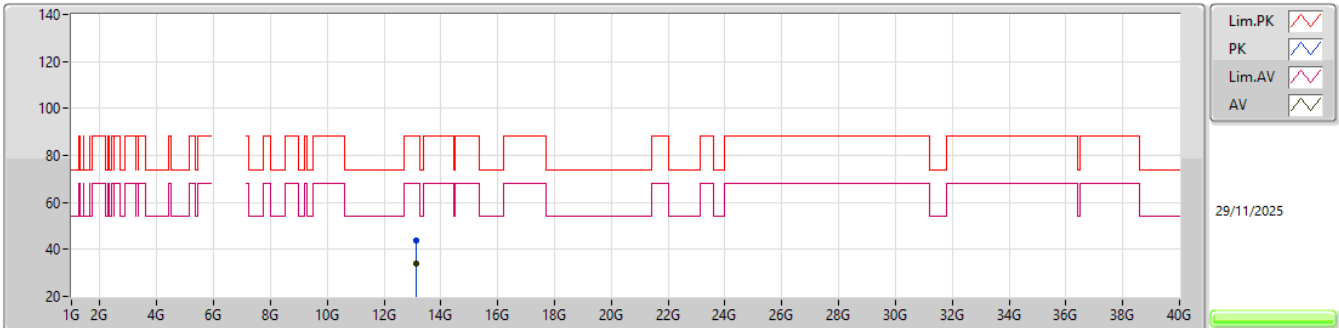
6565MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.13032G	44.84	88.20	-43.36	58.50	3	Vertical	349	2.66	-	39.42	11.79	64.87			
RMS	13.12984G	35.11	68.20	-33.09	48.77	3	Vertical	349	2.66	-	39.42	11.79	64.87			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

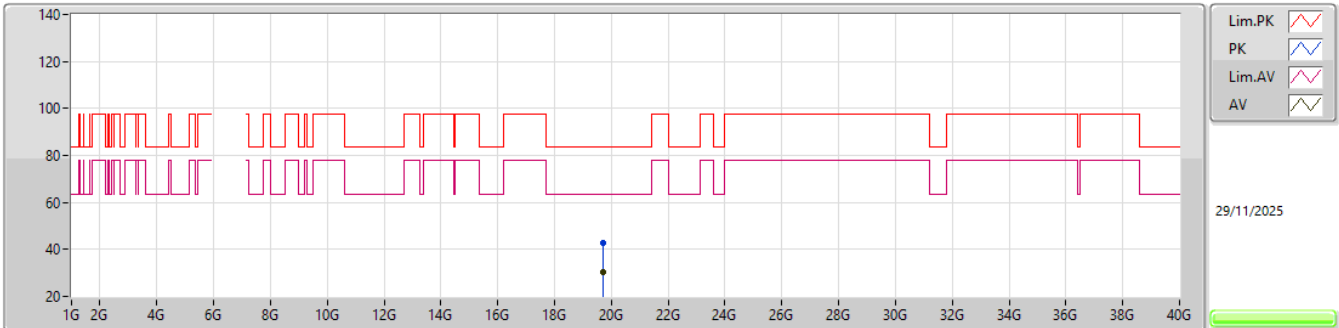
6565MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.12992G	43.73	88.20	-44.47	57.39	3	Horizontal	360	1.85	-	39.42	11.79	64.87			
RMS	13.12992G	34.19	68.20	-34.01	47.85	3	Horizontal	360	1.85	-	39.42	11.79	64.87			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

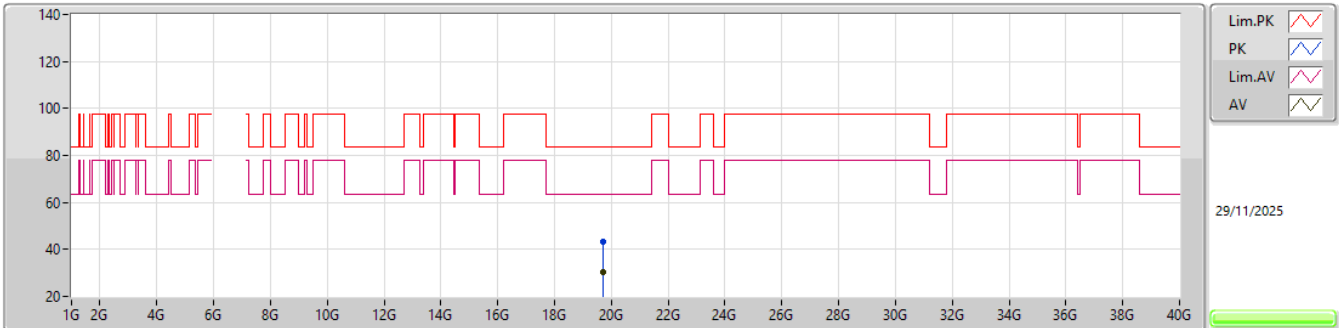
6565MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.719G	42.63	83.54	-40.91	37.15	1	Vertical	344	2.15	-	37.72	17.21	49.45			
AV	19.7061G	30.24	63.54	-33.30	24.72	1	Vertical	344	2.15	-	37.78	17.20	49.46			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

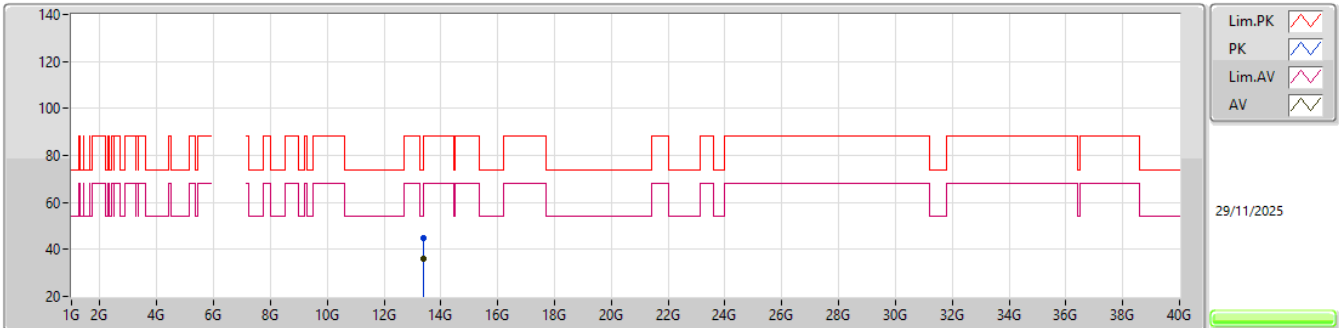
6565MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.71648G	43.36	83.54	-40.18	37.87	1	Horizontal	317	1.66	-	37.73	17.21	49.45			
AV	19.7103G	30.29	63.54	-33.25	24.79	1	Horizontal	317	1.66	-	37.76	17.20	49.46			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

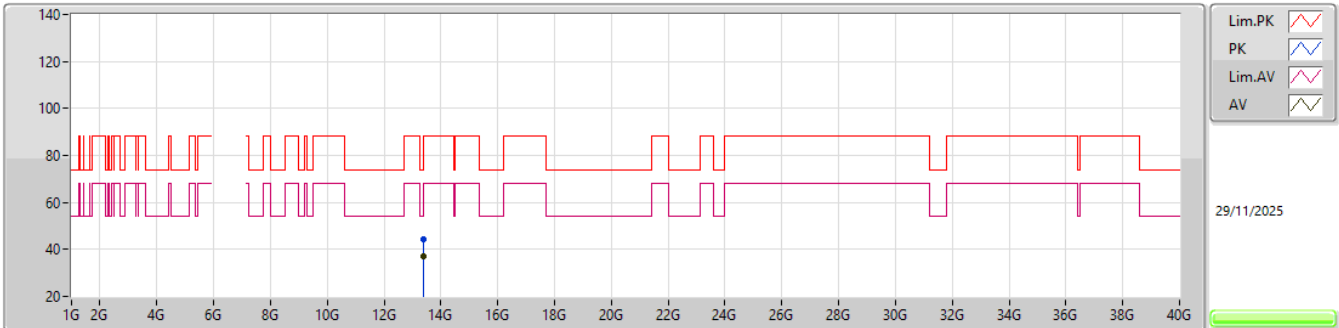
6685MHz_TX

EUT Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.36984G	44.71	74.00	-29.29	57.57	3	Vertical	353	1.87	-	40.04	11.94	64.84			
AV	13.36992G	35.78	54.00	-18.22	48.64	3	Vertical	353	1.87	-	40.04	11.94	64.84			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

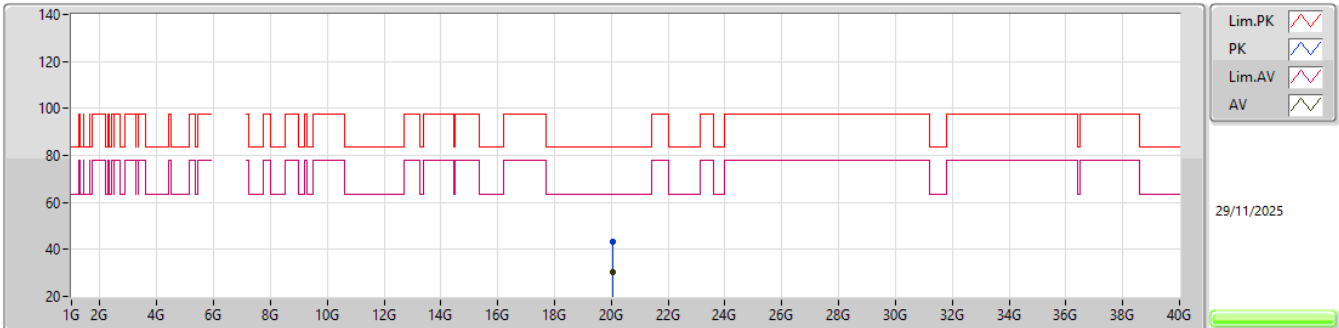
6685MHz_TX

EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.37016G	44.40	74.00	-29.60	57.26	3	Horizontal	12	1.71	-	40.04	11.94	64.84			
AV	13.36984G	37.28	54.00	-16.72	50.14	3	Horizontal	12	1.71	80	40.04	11.94	64.84			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

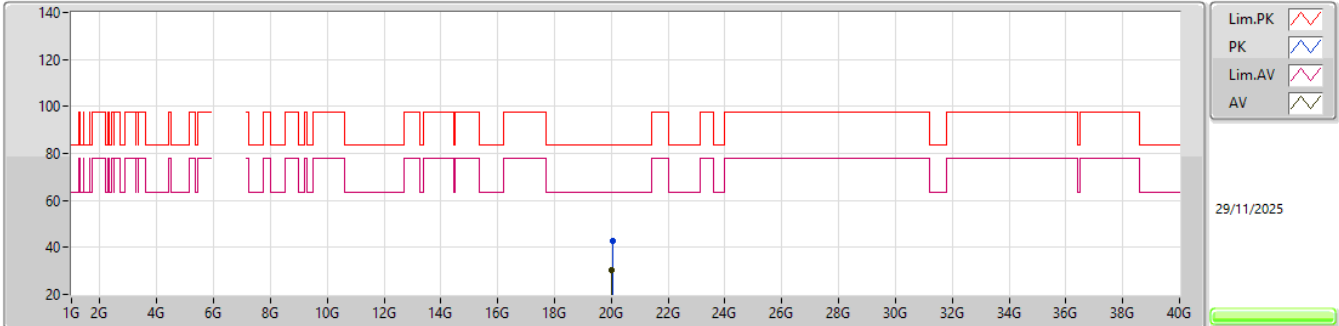
6685MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.03694G	43.14	83.54	-40.40	37.37	1	Vertical	359	1.51	-	37.65	17.38	49.26			
AV	20.0304G	30.19	63.54	-33.35	24.40	1	Vertical	359	1.51	-	37.68	17.37	49.26			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

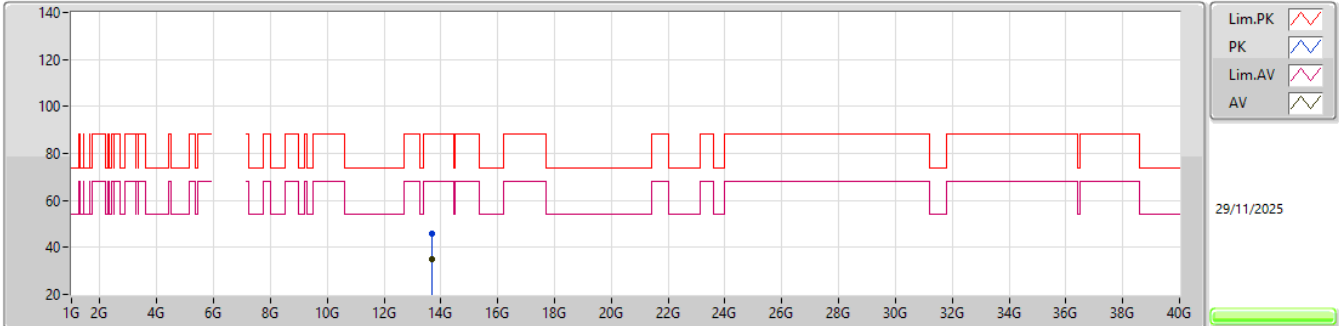
6685MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0442G	42.91	83.54	-40.63	37.17	1	Horizontal	135	1.63	-	37.62	17.38	49.26			
AV	20.0259G	30.47	63.54	-33.07	24.66	1	Horizontal	135	1.63	-	37.70	17.37	49.26			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

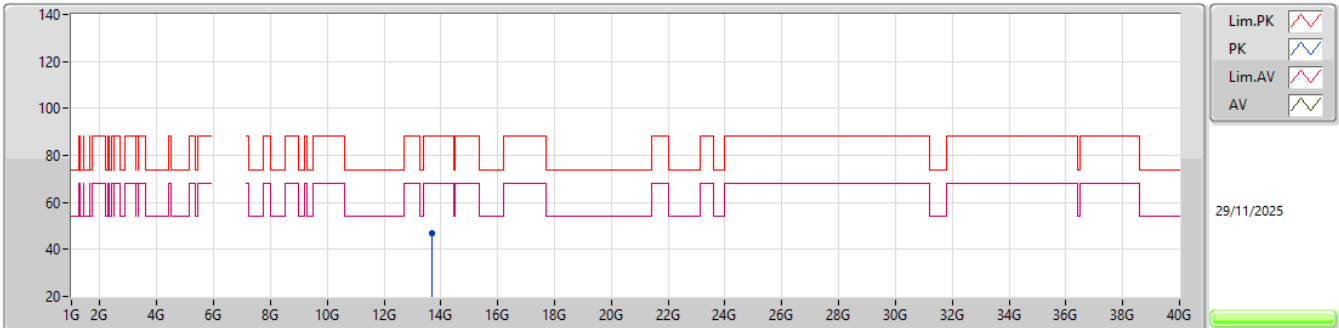
6845MHz_TX

EUT Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.68505G	45.68	88.20	-42.52	58.12	3	Vertical	70	1.46	-	40.17	12.13	64.74			
RMS	13.68013G	34.85	68.20	-33.35	47.31	3	Vertical	70	1.46	-	40.16	12.13	64.75			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

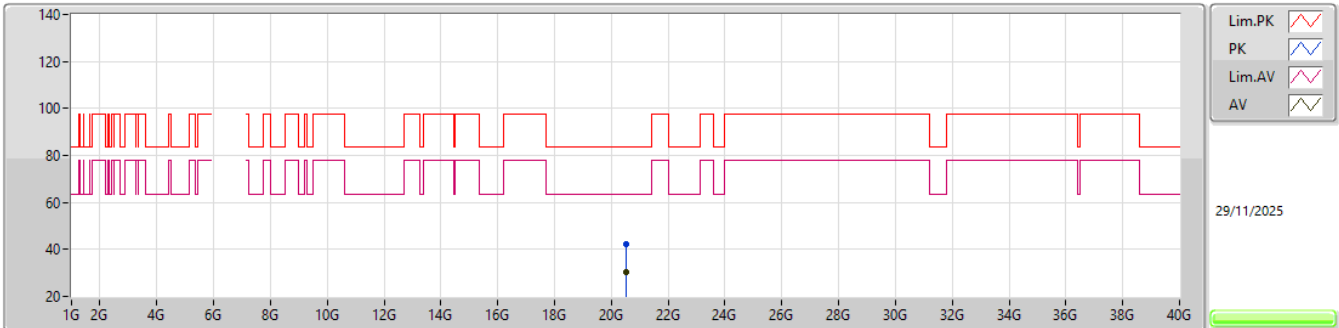
6845MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.67863G	46.64	88.20	-41.56	59.10	3	Horizontal	207	2.98	-	40.16	12.13	64.75			
RMS	13.67734G	13.92	68.20	-54.28	26.39	3	Horizontal	207	2.98	-	40.15	12.13	64.75			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

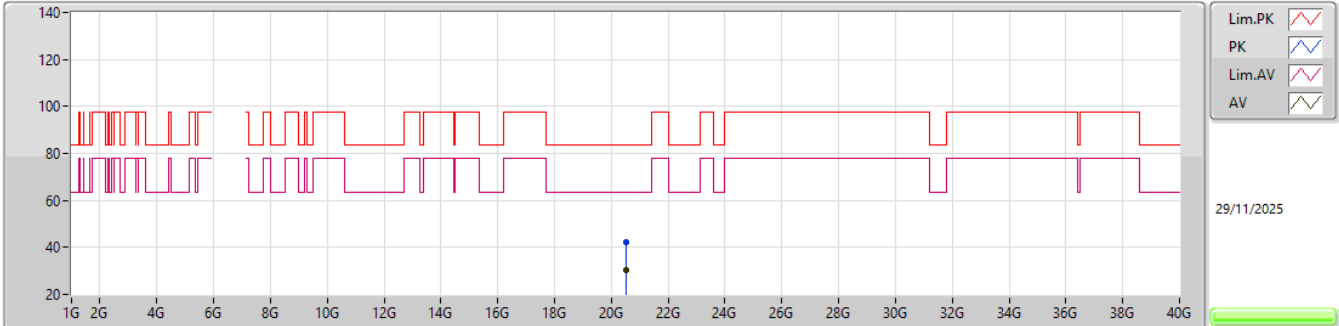
6845MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.53746G	42.05	83.54	-41.49	36.11	1	Vertical	307	2.32	-	37.70	17.45	49.21			
AV	20.50542G	30.16	63.54	-33.38	24.25	1	Vertical	307	2.32	-	37.70	17.44	49.23			

6.525-6.875GHz_802.11ax HEW40_Nss2,(MCS0)_2TX

6845MHz_TX

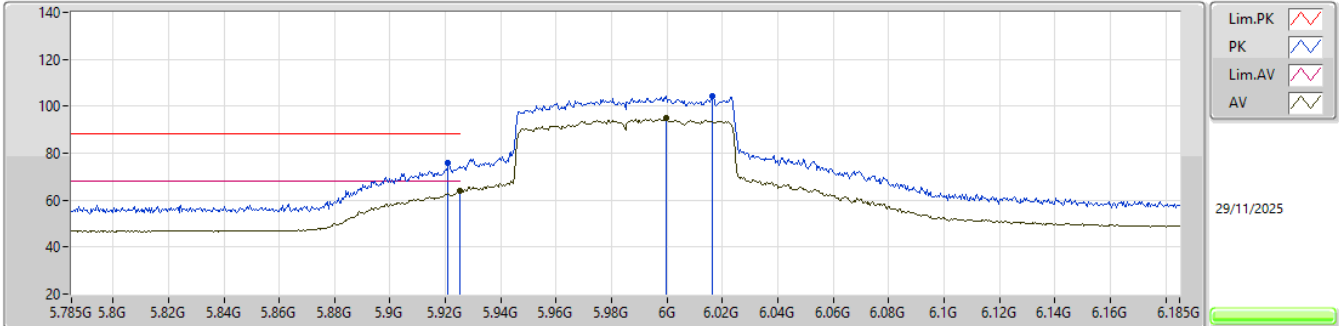


EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.5296G	42.21	83.54	-41.33	36.28	1	Horizontal	340	2.13	-	37.70	17.44	49.21			
AV	20.50722G	30.23	63.54	-33.31	24.32	1	Horizontal	340	2.13	-	37.70	17.44	49.23			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

5985MHz_TX

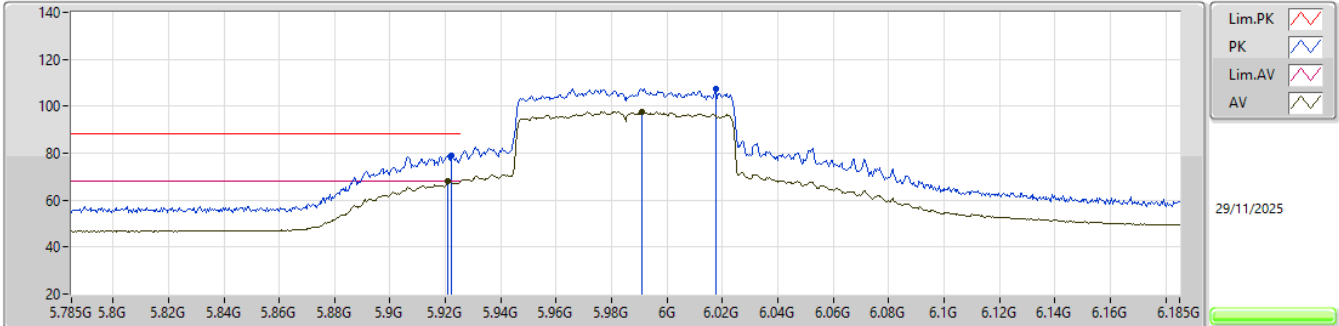


EUT_Y_2TX
SET 84

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.921G	75.90	88.20	-12.30	69.85	3	Vertical	334	2.43	-	32.24	7.57	33.76			
RMS	5.925G	63.99	68.20	-4.21	57.92	3	Vertical	334	2.43	-	32.25	7.58	33.76			
PK	6.0162G	104.33	Inf	-Inf	97.94	3	Vertical	334	2.43	-	32.43	7.70	33.74			
RMS	5.9998G	94.87	Inf	-Inf	88.51	3	Vertical	334	2.43	-	32.40	7.71	33.75			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

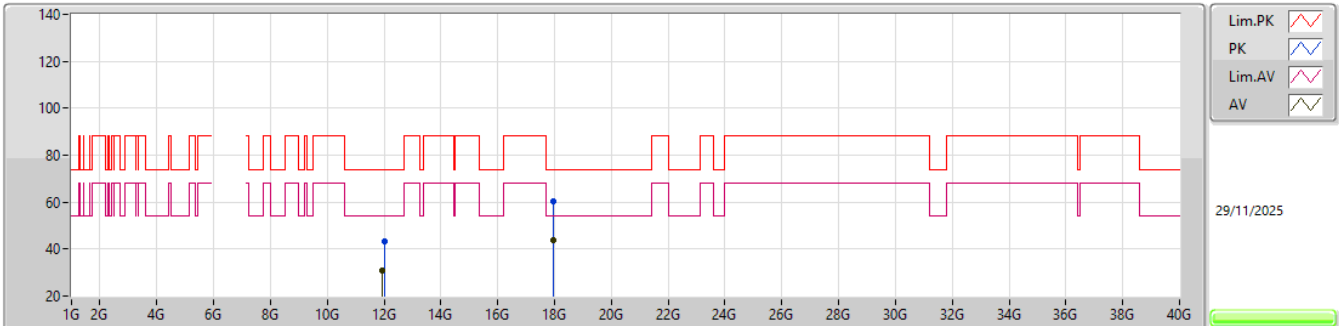
5985MHz_TX

EUT_Y_2TX
SET 84

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9222G	78.77	88.20	-9.43	72.72	3	Horizontal	79	2.66	-	32.24	7.57	33.76			
RMS	5.921G	68.00	68.20	-0.20	61.95	3	Horizontal	79	2.66	-	32.24	7.57	33.76			
PK	6.0178G	107.30	Inf	-Inf	100.90	3	Horizontal	79	2.66	-	32.44	7.70	33.74			
RMS	5.991G	97.67	Inf	-Inf	91.35	3	Horizontal	79	2.66	-	32.38	7.69	33.75			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

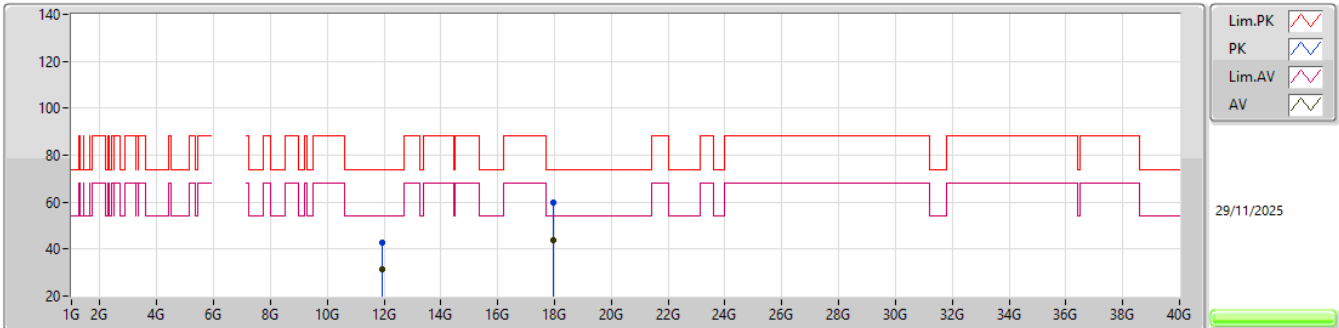
5985MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.00277G	43.05	74.00	-30.95	58.70	3	Vertical	27	2.93	-	39.01	11.09	65.75			
AV	11.95498G	30.65	54.00	-23.35	46.54	3	Vertical	27	2.93	-	38.82	11.08	65.79			
PK	17.9694G	60.33	74.00	-13.67	57.51	3	Vertical	224	1.56	-	51.99	14.78	63.95			
AV	17.96835G	43.55	54.00	-10.45	40.79	3	Vertical	224	1.56	-	51.93	14.78	63.95			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

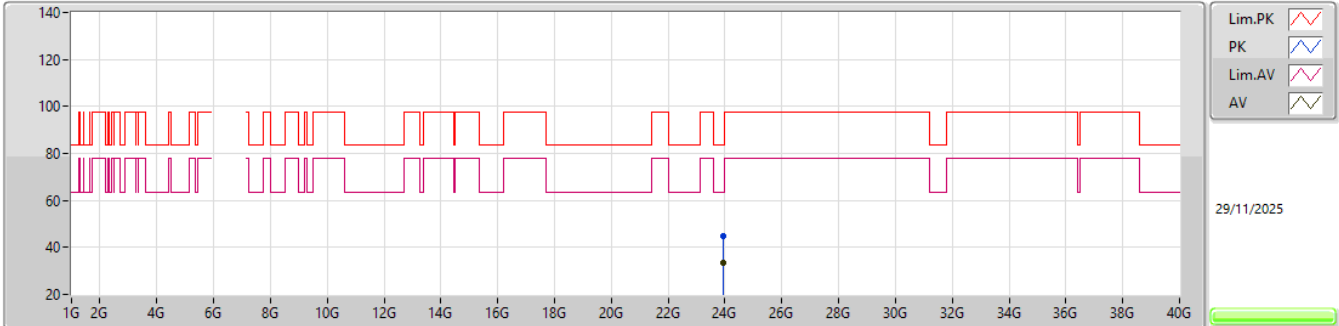
5985MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.94666G	42.91	74.00	-31.09	58.83	3	Horizontal	12	1.80	-	38.80	11.08	65.80			
AV	11.95034G	31.32	54.00	-22.68	47.23	3	Horizontal	12	1.80	-	38.80	11.08	65.79			
PK	17.95308G	59.93	74.00	-14.07	58.05	3	Horizontal	173	2.48	-	51.07	14.77	63.96			
AV	17.96877G	43.54	54.00	-10.46	40.76	3	Horizontal	173	2.48	-	51.95	14.78	63.95			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

5985MHz_TX

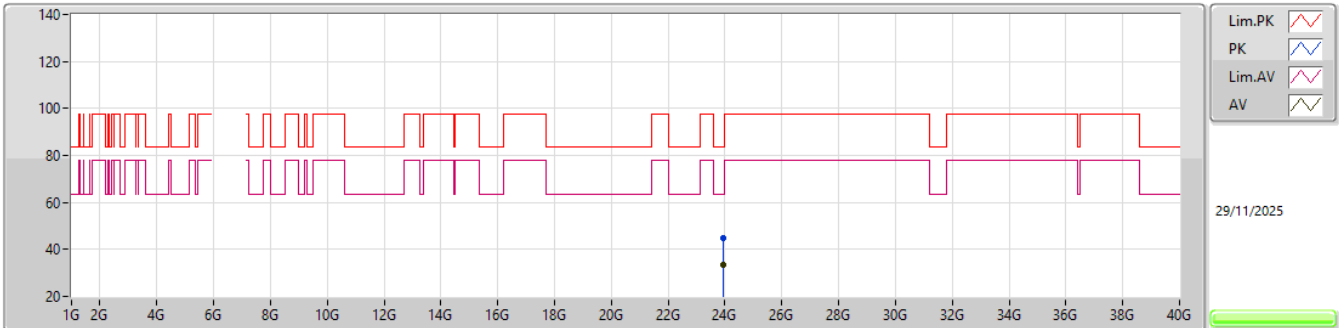


EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.9205G	44.95	83.54	-38.59	34.51	1	Vertical	152	1.37	-	38.78	18.76	47.10			
AV	23.92458G	33.30	63.54	-30.24	22.83	1	Vertical	152	1.37	-	38.80	18.76	47.09			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

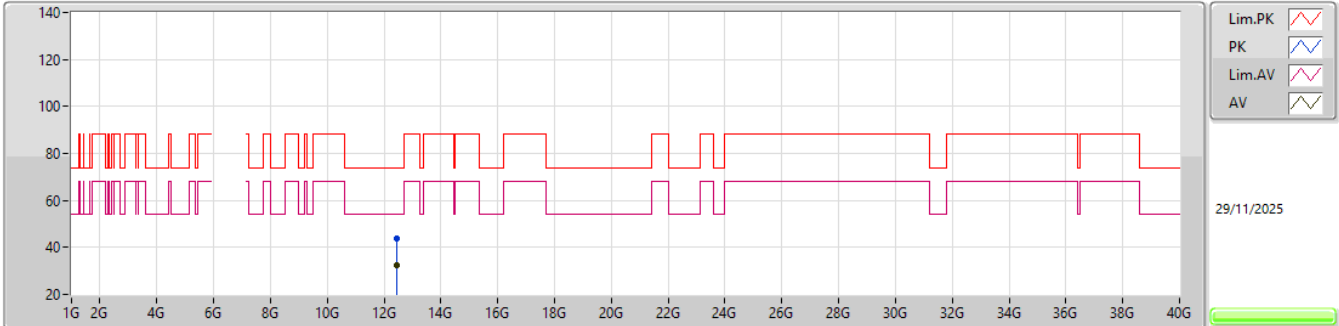
5985MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.9544G	44.75	83.54	-38.79	34.17	1	Horizontal	284	2.95	-	38.89	18.77	47.08			
AV	23.94756G	33.40	63.54	-30.14	22.82	1	Horizontal	284	2.95	-	38.89	18.77	47.08			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

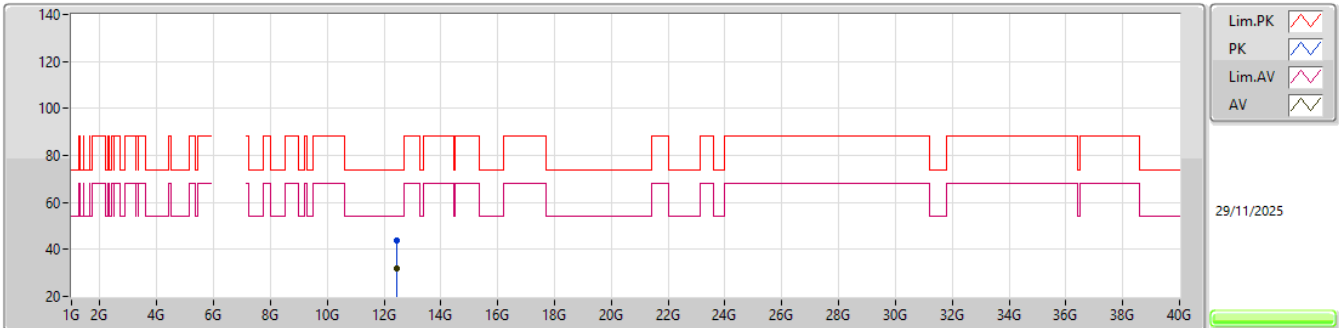
6225MHz_TX

EUT Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.45064G	43.84	74.00	-30.16	59.46	3	Vertical	344	2.54	-	38.60	11.37	65.59			
AV	12.45096G	32.19	54.00	-21.81	47.81	3	Vertical	344	2.54	-	38.60	11.37	65.59			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

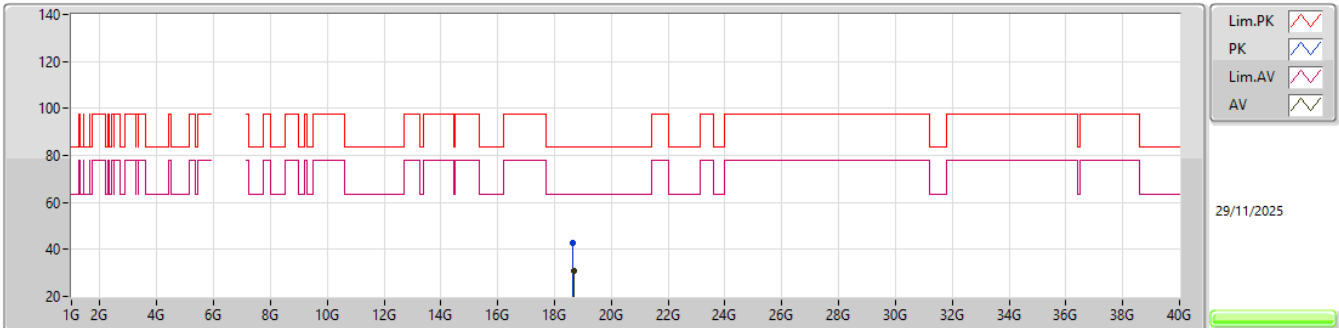
6225MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.44345G	43.70	74.00	-30.30	59.32	3	Horizontal	16	1.80	-	38.61	11.36	65.59			
AV	12.43034G	32.06	54.00	-21.94	47.66	3	Horizontal	16	1.80	-	38.64	11.36	65.60			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

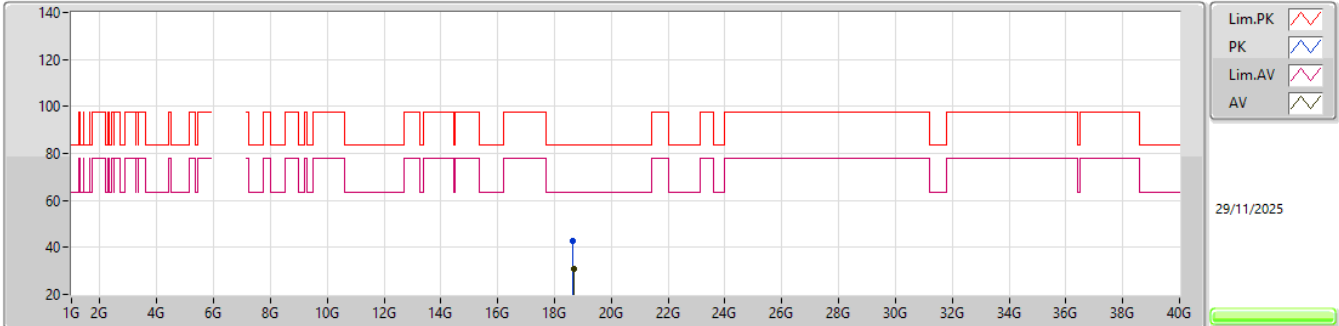
6225MHz_TX

EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.64764G	42.64	83.54	-40.90	37.93	1	Vertical	277	2.33	-	37.70	16.61	49.60			
AV	18.70302G	30.81	63.54	-32.73	26.11	1	Vertical	277	2.33	-	37.61	16.64	49.55			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

6225MHz_TX

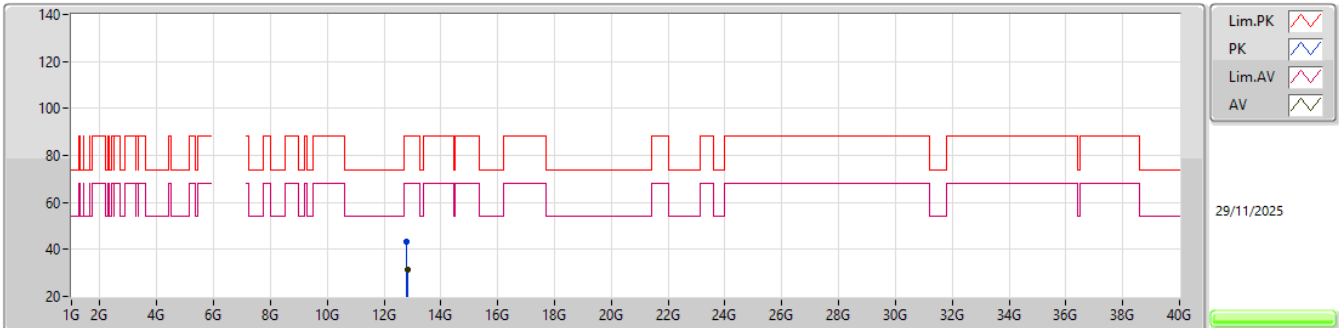


EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.65754G	42.63	83.54	-40.91	37.92	1	Horizontal	155	1.14	-	37.68	16.62	49.59			
AV	18.69054G	30.98	63.54	-32.56	26.29	1	Horizontal	155	1.14	-	37.62	16.63	49.56			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

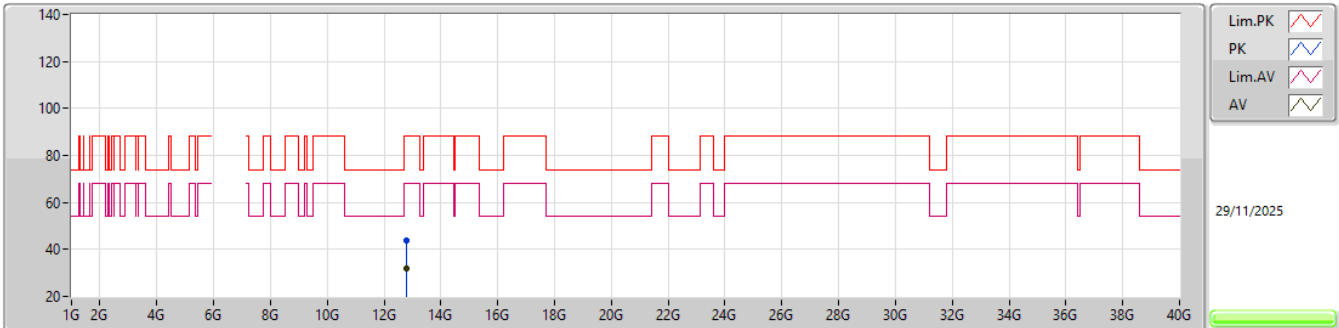
6385MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.77623G	43.28	88.20	-44.92	57.64	3	Vertical	1	1.97	-	39.26	11.57	65.19			
RMS	12.84832G	31.46	68.20	-36.74	45.43	3	Vertical	1	1.97	-	39.50	11.62	65.09			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

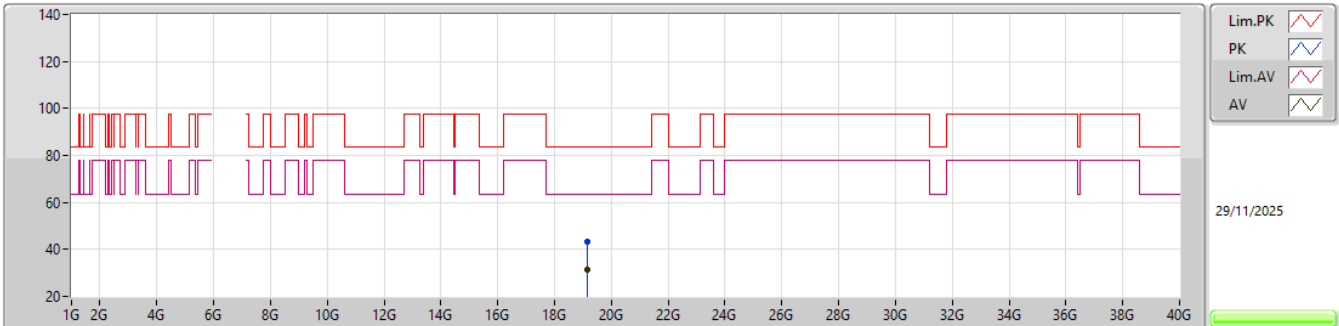
6385MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80069G	43.60	88.20	-44.60	57.77	3	Horizontal	1	1.80	-	39.40	11.59	65.16			
RMS	12.77863G	31.96	68.20	-36.24	46.31	3	Horizontal	1	1.80	-	39.27	11.57	65.19			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

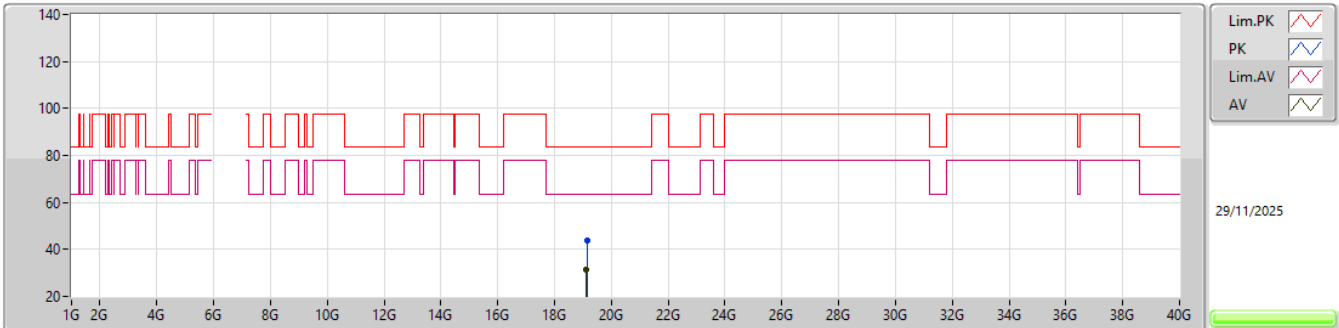
6385MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.15482G	43.49	83.54	-40.05	38.13	1	Vertical	36	2.34	-	37.88	16.88	49.40			
AV	19.14312G	31.59	63.54	-31.95	26.24	1	Vertical	36	2.34	-	37.87	16.87	49.39			

5.925-6.425GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

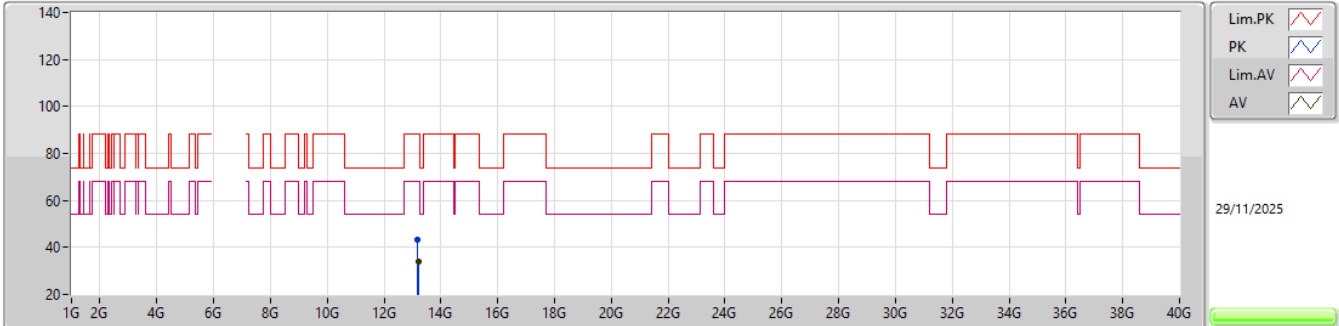
6385MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15914G	43.61	83.54	-39.93	38.27	1	Horizontal	43	1.34	-	37.86	16.88	49.40			
AV	19.13022G	31.43	63.54	-32.11	26.13	1	Horizontal	43	1.34	-	37.82	16.87	49.39			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

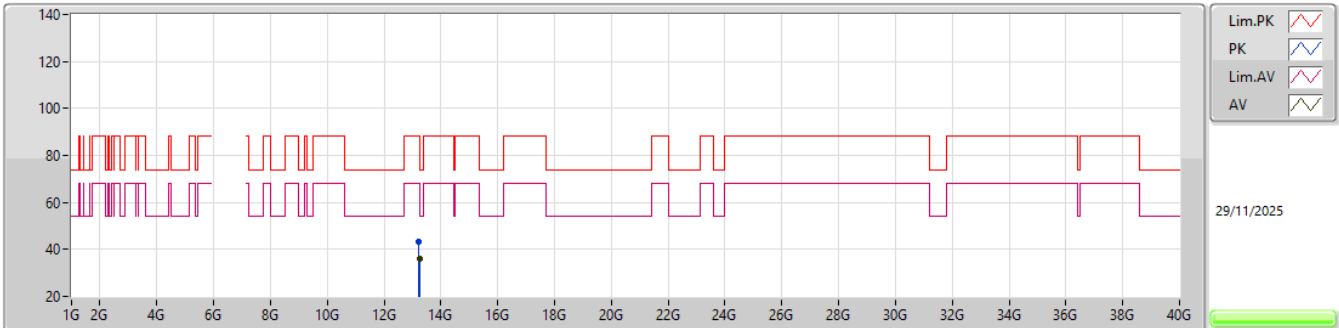
6625MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.1891G	43.16	88.20	-45.04	56.69	3	Vertical	357	2.69	-	39.50	11.83	64.86			
RMS	13.215G	33.87	68.20	-34.33	47.36	3	Vertical	357	2.69	-	39.53	11.84	64.86			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

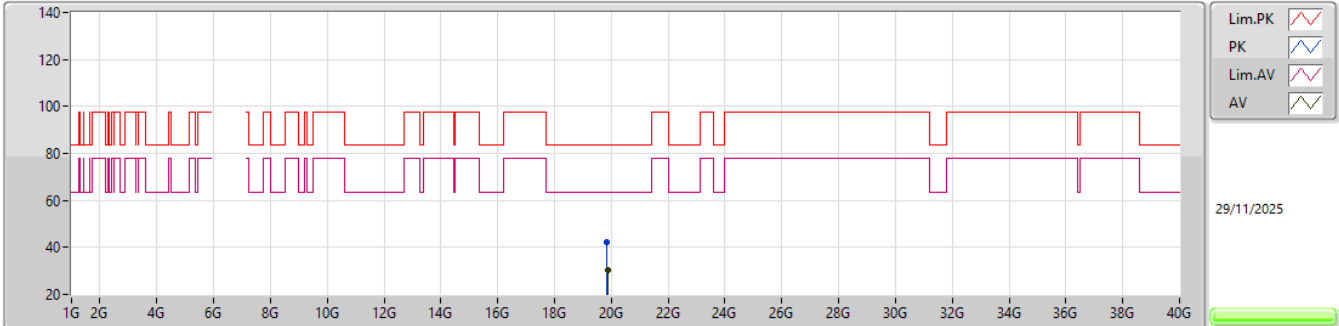
6625MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.2048G	43.45	88.20	-44.75	56.96	3	Horizontal	8	2.02	-	39.51	11.84	64.86			
RMS	13.24984G	36.13	68.20	-32.07	49.53	3	Horizontal	8	2.02	-	39.60	11.86	64.86			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

6625MHz_TX

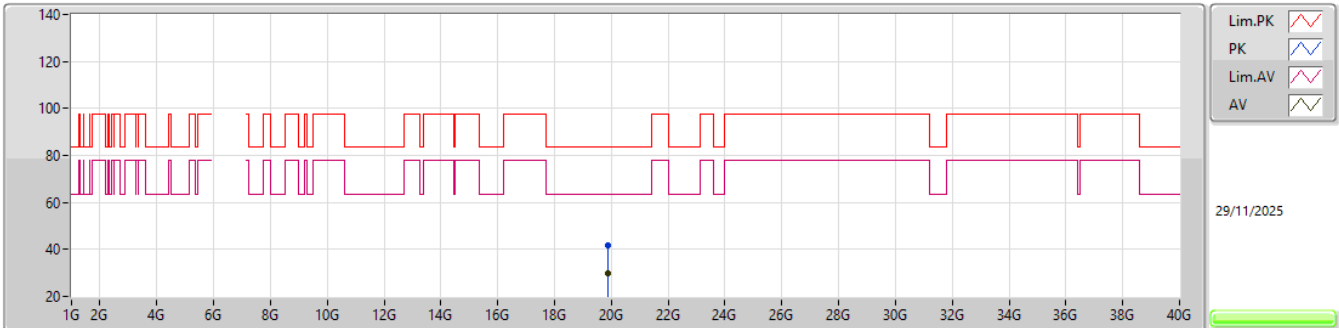


EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.85676G	42.00	83.54	-41.54	36.38	1	Vertical	2	1.13	-	37.69	17.29	49.36			
AV	19.86648G	30.25	63.54	-33.29	24.64	1	Vertical	2	1.13	-	37.67	17.29	49.35			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

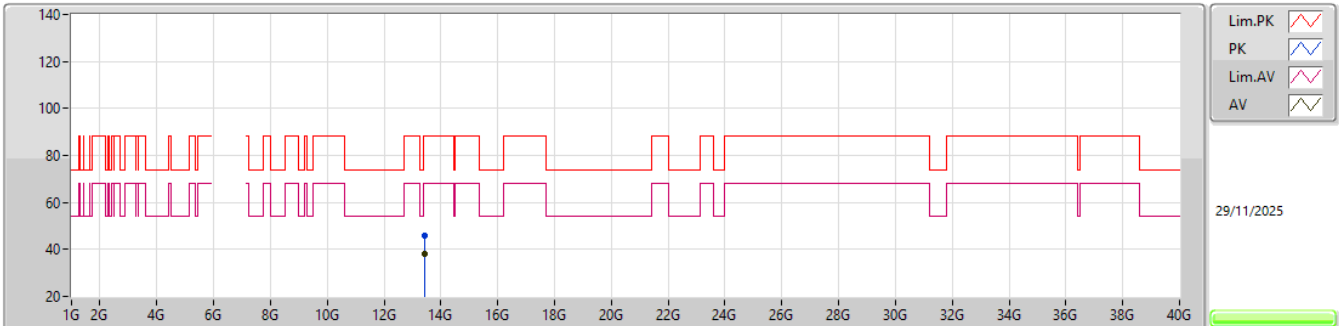
6625MHz_TX

EUT Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.89384G	41.68	83.54	-41.86	36.09	1	Horizontal	140	2.27	-	37.61	17.31	49.33			
AV	19.87242G	29.92	63.54	-33.62	24.31	1	Horizontal	140	2.27	-	37.66	17.30	49.35			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

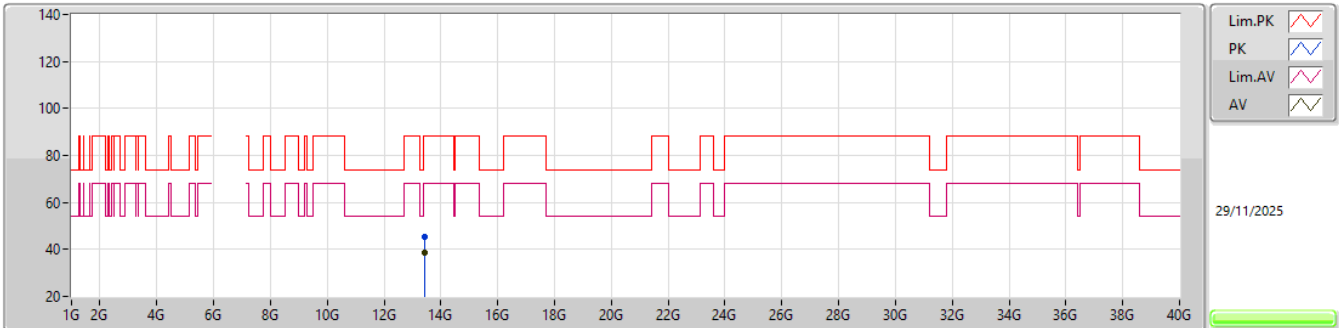
6705MHz_TX

EUT Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41016G	45.83	88.20	-42.37	58.61	3	Vertical	352	1.88	-	40.10	11.96	64.84			
RMS	13.40984G	37.88	68.20	-30.32	50.66	3	Vertical	352	1.88	-	40.10	11.96	64.84			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

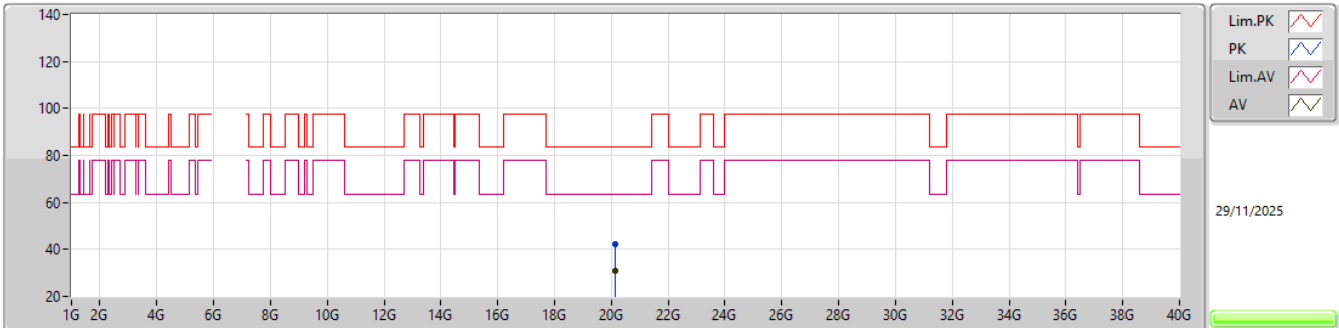
6705MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.40968G	45.40	88.20	-42.80	58.18	3	Horizontal	11	1.80	-	40.10	11.96	64.84			
RMS	13.40984G	38.59	68.20	-29.61	51.37	3	Horizontal	11	1.80	-	40.10	11.96	64.84			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

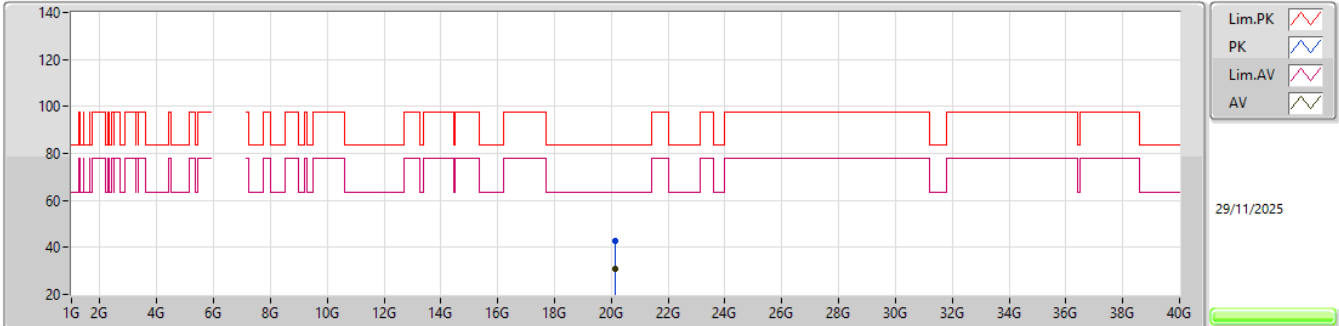
6705MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.11818G	42.27	83.54	-41.27	36.43	1	Vertical	271	2.48	-	37.70	17.39	49.25			
AV	20.1297G	31.11	63.54	-32.43	25.27	1	Vertical	271	2.48	-	37.70	17.39	49.25			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

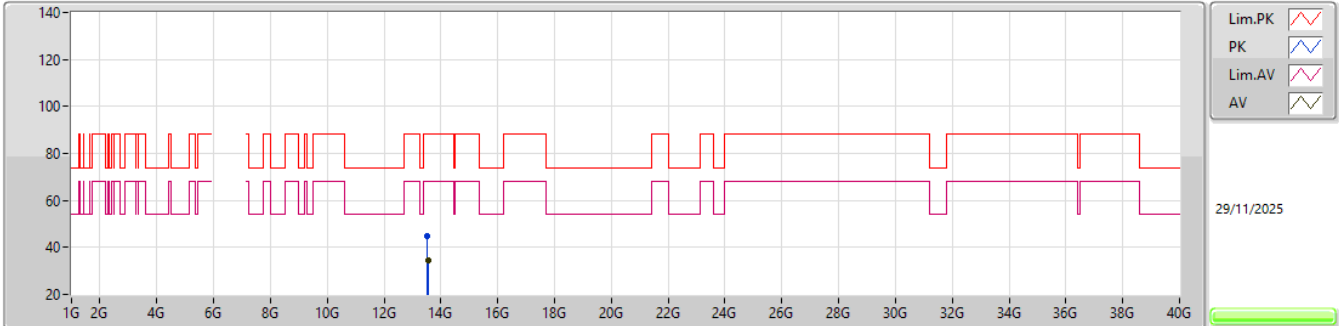
6705MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.1375G	42.59	83.54	-40.95	36.75	1	Horizontal	27	2.04	-	37.70	17.39	49.25			
AV	20.13762G	30.77	63.54	-32.77	24.93	1	Horizontal	27	2.04	-	37.70	17.39	49.25			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

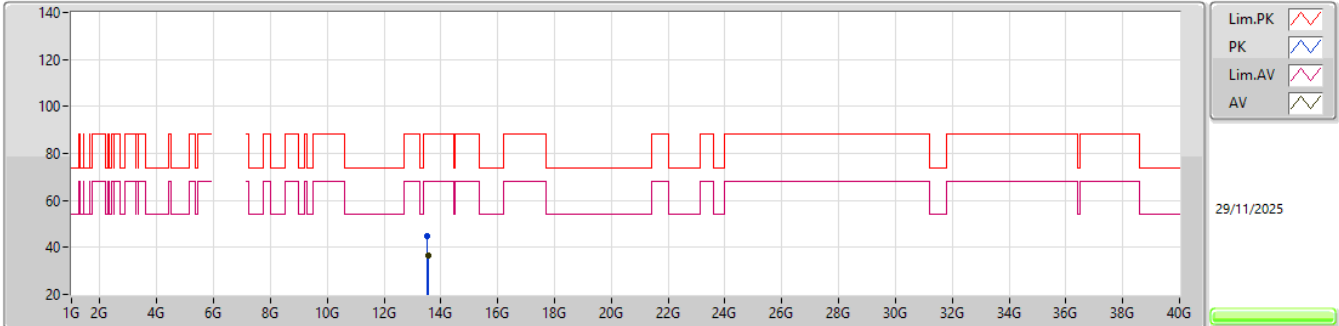
6785MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.52796G	44.86	88.20	-43.34	57.27	3	Vertical	360	1.80	-	40.37	12.04	64.82			
RMS	13.57G	34.26	68.20	-33.94	46.62	3	Vertical	360	1.80	-	40.38	12.06	64.80			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

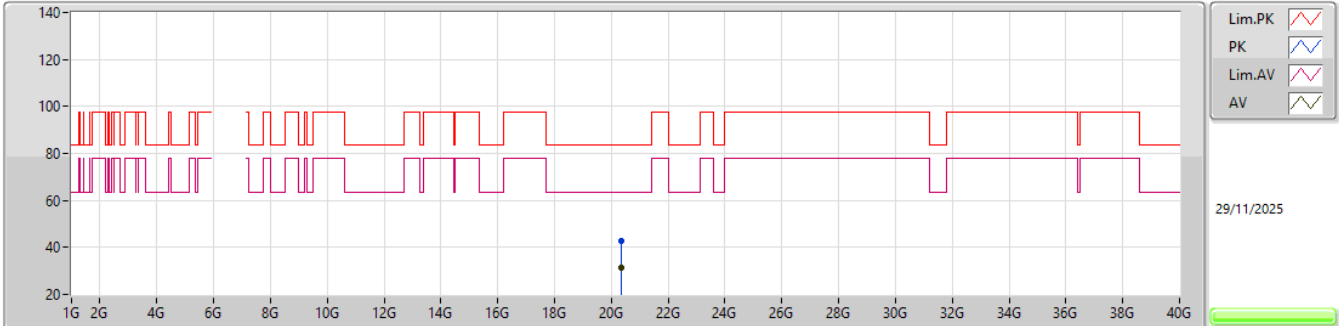
6785MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	13.53484G	44.60	88.20	-43.60	56.96	3	Horizontal	6	1.95	-	40.41	12.04	64.81				
RMS	13.57G	36.32	68.20	-31.88	48.68	3	Horizontal	6	1.95	-	40.38	12.06	64.80				

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

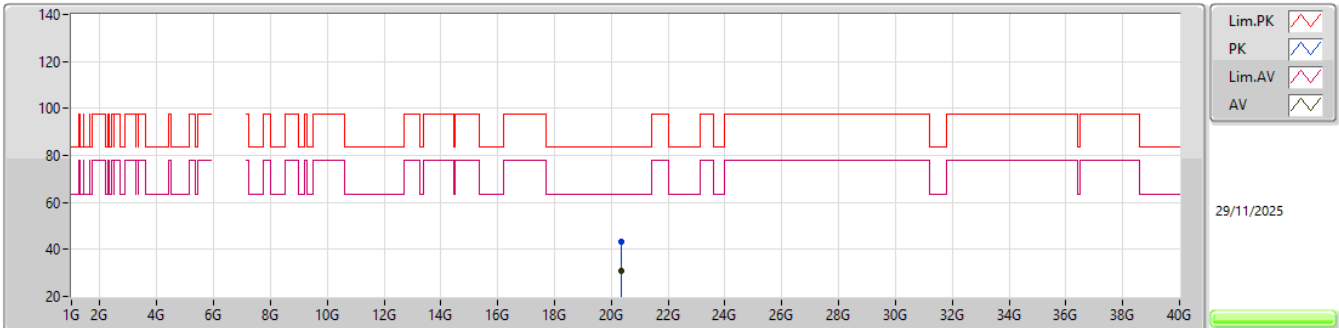
6785MHz_TX

EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.33754G	42.63	83.54	-40.91	36.67	1	Vertical	216	2.90	-	37.78	17.42	49.24			
AV	20.35188G	31.22	63.54	-32.32	25.25	1	Vertical	216	2.90	-	37.79	17.42	49.24			

6.525-6.875GHz_802.11ax HEW80_Nss2,(MCS0)_2TX

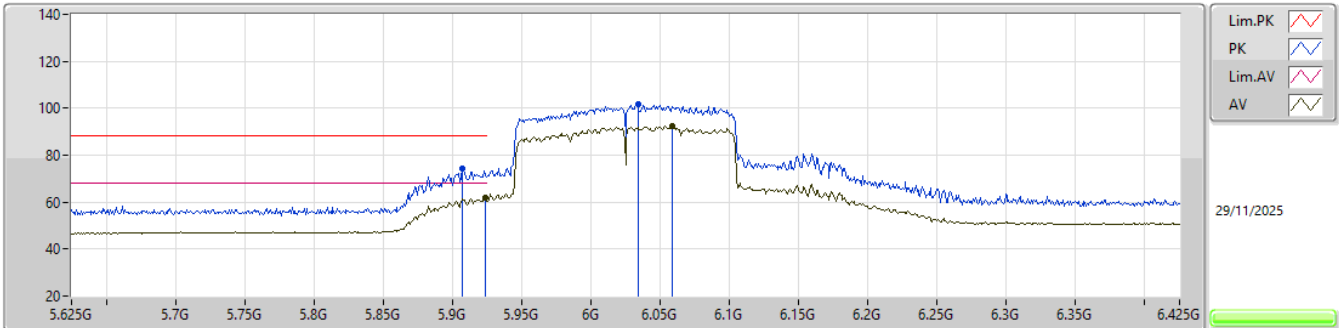
6785MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.3304G	43.14	83.54	-40.40	37.20	1	Horizontal	189	1.86	-	37.76	17.42	49.24			
AV	20.36112G	31.06	63.54	-32.48	25.12	1	Horizontal	189	1.86	-	37.76	17.42	49.24			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

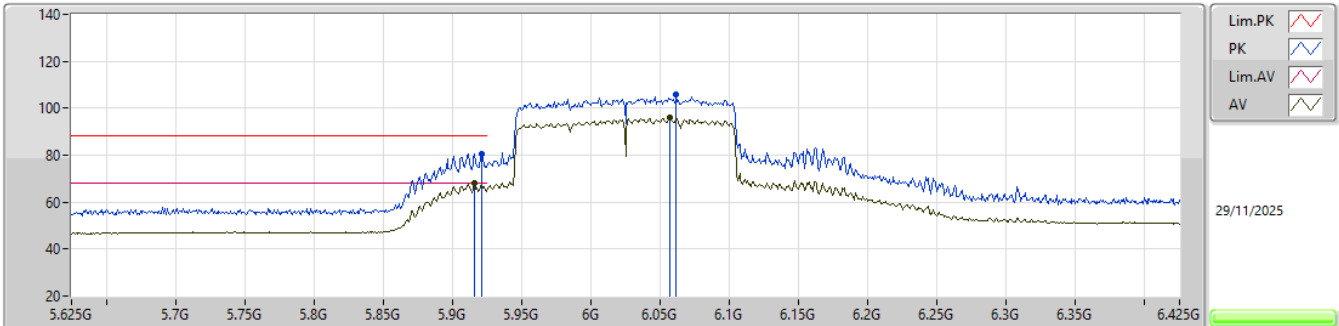
6025MHz_TX

EUT_Y_2TX
SET83

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9074G	74.31	88.20	-13.89	68.32	3	Vertical	338	2.31	-	32.21	7.54	33.76			
RMS	5.9234G	61.73	68.20	-6.47	55.67	3	Vertical	338	2.31	-	32.25	7.57	33.76			
PK	6.0338G	101.77	Inf	-Inf	95.34	3	Vertical	338	2.31	-	32.47	7.69	33.73			
RMS	6.0586G	92.44	Inf	-Inf	85.98	3	Vertical	338	2.31	-	32.50	7.67	33.71			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

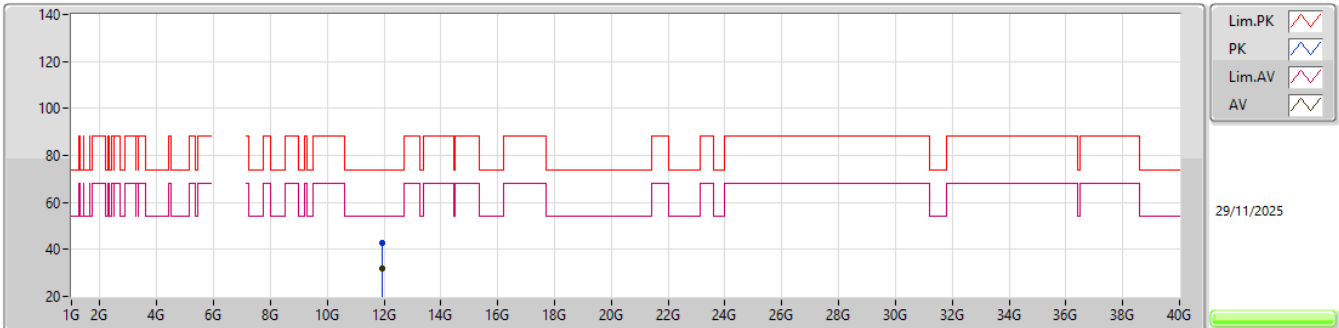
6025MHz_TX

EUT_Y_2TX
SET83

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.921G	80.58	88.20	-7.62	74.53	3	Horizontal	72	2.73	-	32.24	7.57	33.76			
RMS	5.9162G	67.87	68.20	-0.33	61.84	3	Horizontal	72	2.73	-	32.23	7.56	33.76			
PK	6.0618G	105.79	Inf	-Inf	99.33	3	Horizontal	72	2.73	-	32.50	7.67	33.71			
RMS	6.057G	95.81	Inf	-Inf	89.35	3	Horizontal	72	2.73	-	32.50	7.67	33.71			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

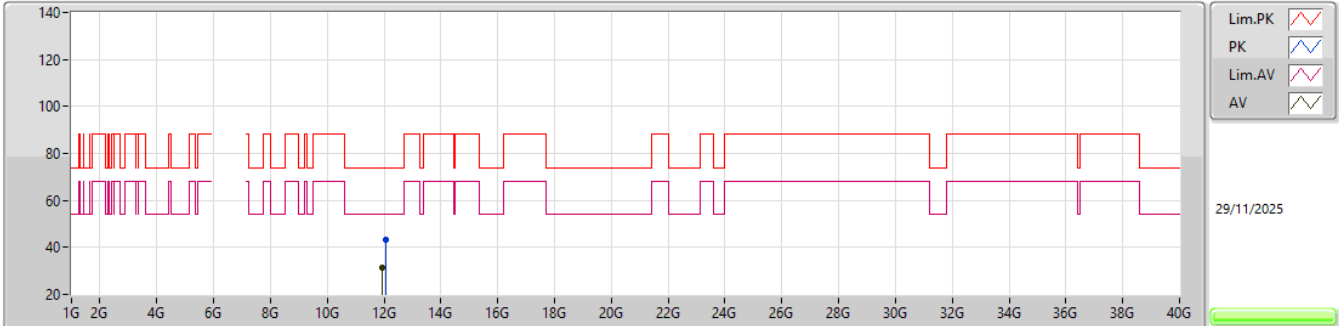
6025MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.94291G	42.89	74.00	-31.11	58.81	3	Vertical	28	1.08	-	38.80	11.08	65.80			
AV	11.94323G	31.88	54.00	-22.12	47.80	3	Vertical	28	1.08	-	38.80	11.08	65.80			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

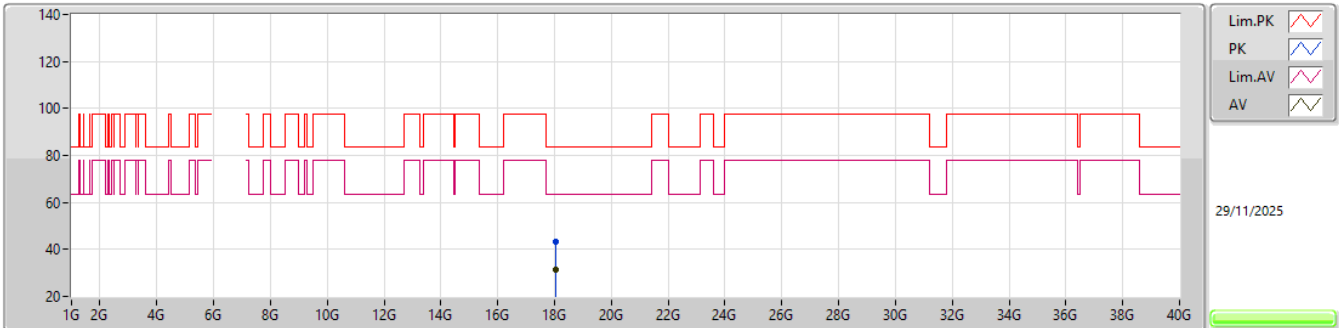
6025MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.08069G	43.05	74.00	-30.95	58.41	3	Horizontal	324	2.94	-	39.22	11.14	65.72			
AV	11.95122G	31.58	54.00	-22.42	47.49	3	Horizontal	324	2.94	-	38.80	11.08	65.79			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

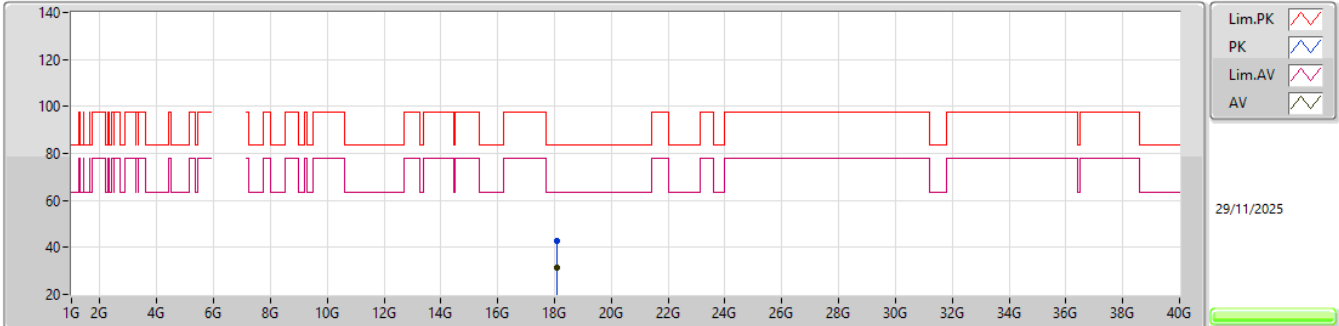
6025MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.05304G	43.51	83.54	-40.03	39.40	1	Vertical	312	2.48	-	37.31	16.31	49.51			
AV	18.05688G	31.50	63.54	-32.04	27.40	1	Vertical	312	2.48	-	37.31	16.31	49.52			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

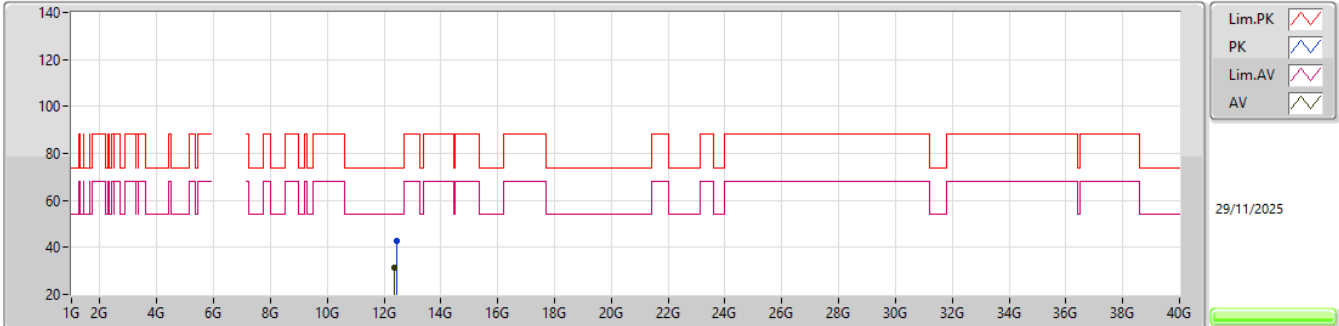
6025MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.08094G	42.72	83.54	-40.82	38.57	1	Horizontal	218	2.37	-	37.36	16.32	49.53			
AV	18.0822G	31.39	63.54	-32.15	27.24	1	Horizontal	218	2.37	-	37.36	16.32	49.53			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

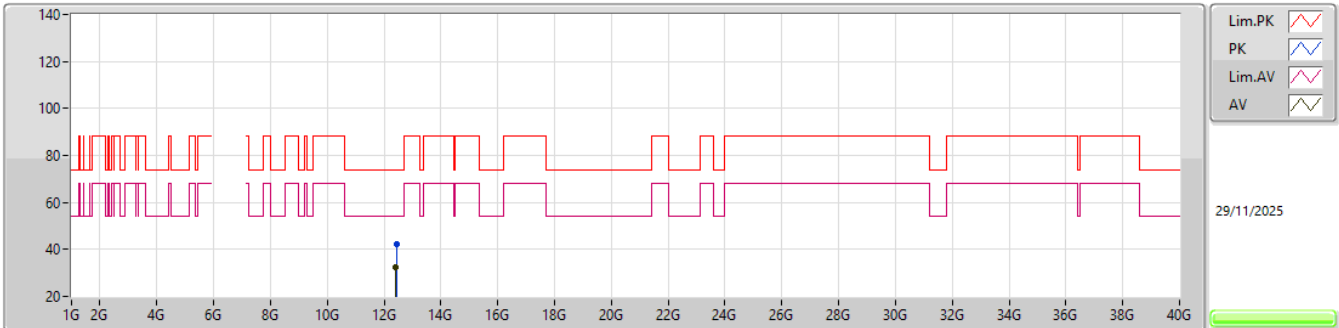
6185MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.46718G	43.00	74.00	-31.00	58.60	3	Vertical	360	1.80	-	38.60	11.38	65.58			
AV	12.37G	31.63	54.00	-22.37	47.17	3	Vertical	360	1.80	-	38.76	11.32	65.62			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

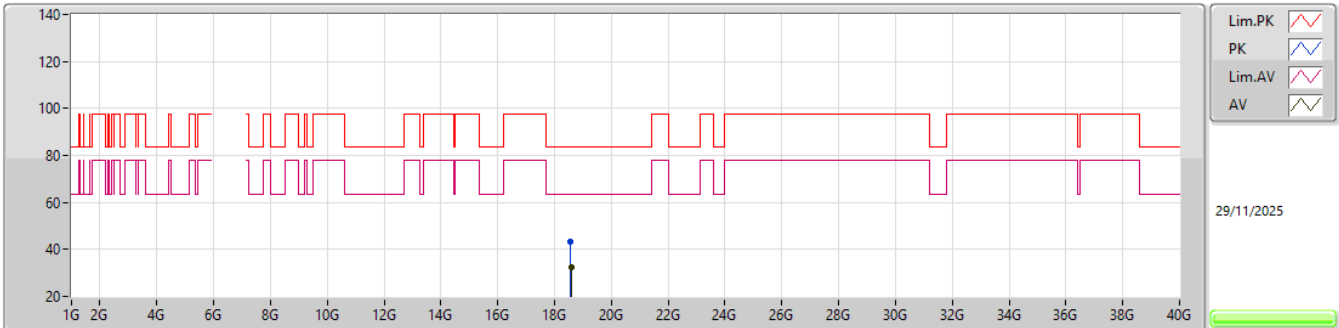
6185MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.43202G	42.45	74.00	-31.55	58.04	3	Horizontal	12	1.80	-	38.64	11.36	65.59			
AV	12.39462G	32.47	54.00	-21.53	48.04	3	Horizontal	12	1.80	-	38.71	11.33	65.61			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

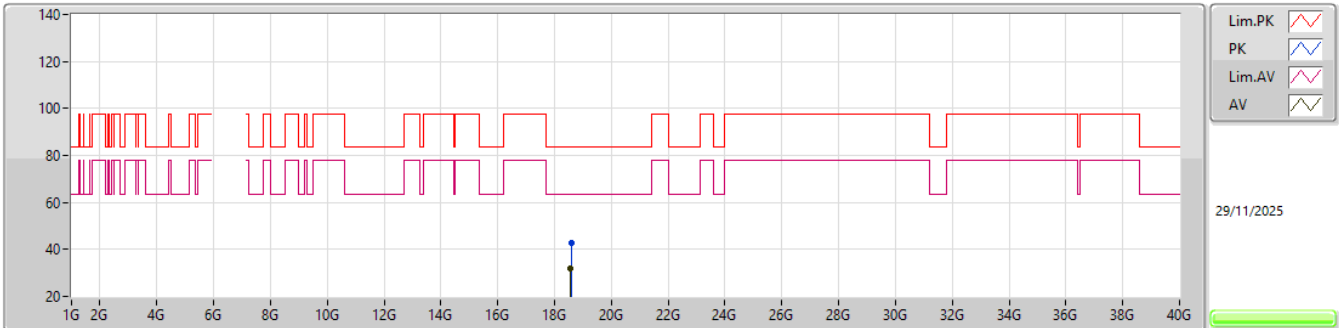
6185MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.54138G	43.19	83.54	-40.35	38.70	1	Vertical	268	1.82	-	37.62	16.56	49.69			
AV	18.579G	32.26	63.54	-31.28	27.68	1	Vertical	268	1.82	-	37.66	16.58	49.66			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

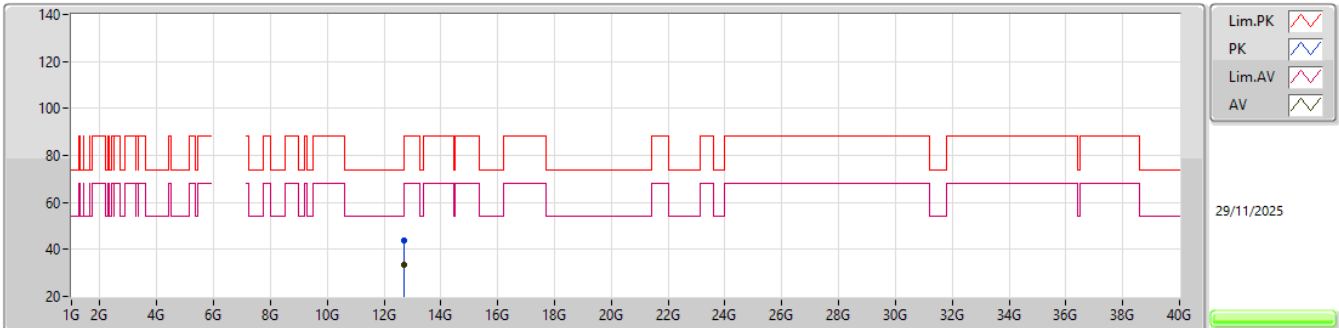
6185MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5844G	42.76	83.54	-40.78	38.16	1	Horizontal	229	1.26	-	37.67	16.58	49.65			
AV	18.5424G	31.91	63.54	-31.63	27.42	1	Horizontal	229	1.26	-	37.62	16.56	49.69			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

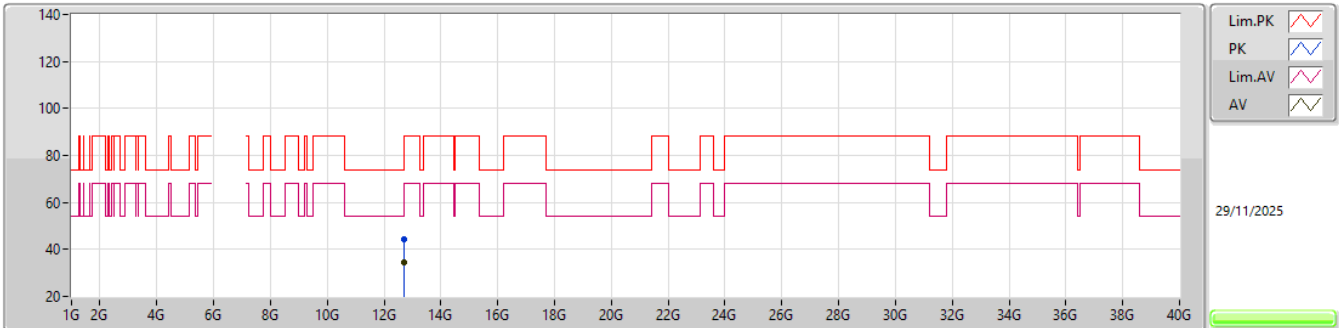
6345MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.70854G	43.68	88.20	-44.52	58.33	3	Vertical	338	1.90	-	39.10	11.53	65.28			
RMS	12.70343G	33.63	68.20	-34.57	48.29	3	Vertical	338	1.90	-	39.10	11.53	65.29			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

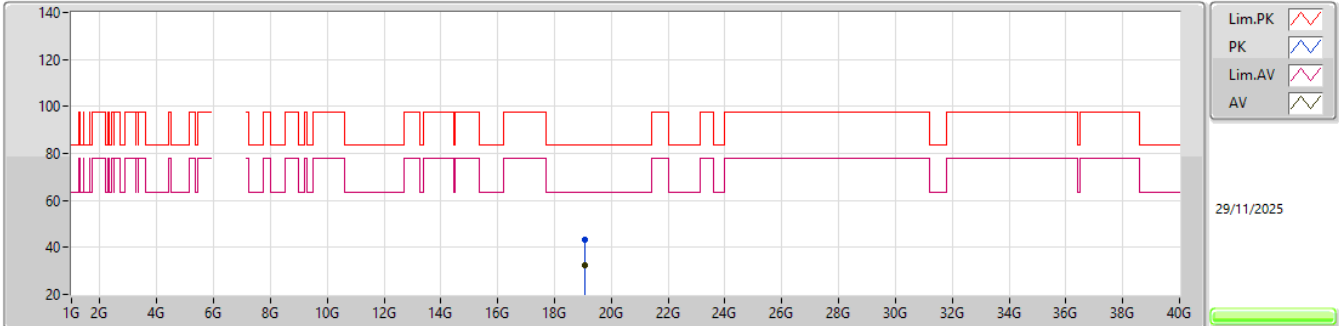
6345MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.70854G	44.18	88.20	-44.02	58.83	3	Horizontal	338	1.80	-	39.10	11.53	65.28			
RMS	12.70854G	34.23	68.20	-33.97	48.88	3	Horizontal	338	1.80	-	39.10	11.53	65.28			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

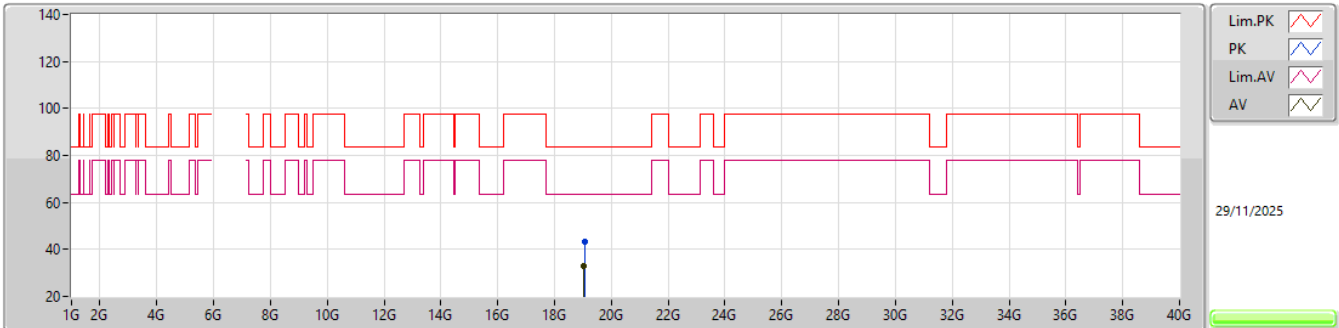
6345MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.05666G	43.51	83.54	-40.03	38.16	1	Vertical	85	2.39	-	37.87	16.82	49.34			
AV	19.06032G	32.66	63.54	-30.88	27.32	1	Vertical	85	2.39	-	37.86	16.82	49.34			

5.925-6.425GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

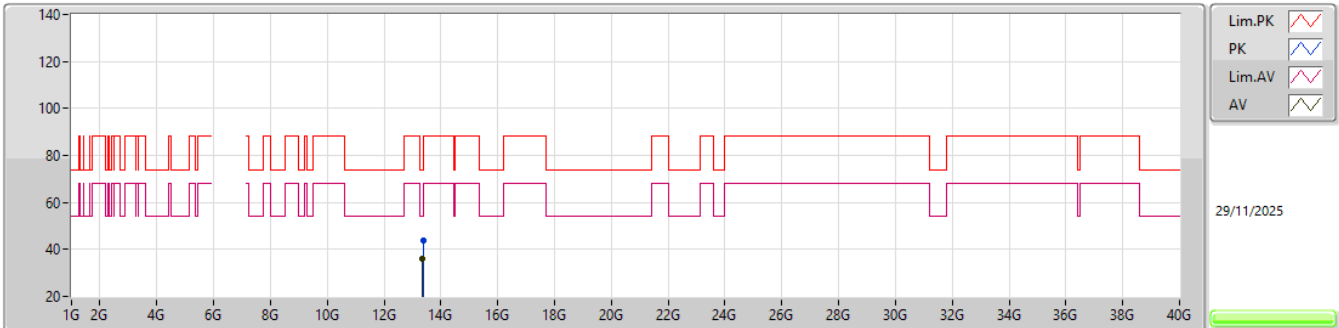
6345MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.05744G	43.13	83.54	-40.41	37.78	1	Horizontal	225	2.33	-	37.87	16.82	49.34			
AV	19.04712G	32.69	63.54	-30.85	27.32	1	Horizontal	225	2.33	-	37.89	16.82	49.34			

6.525-6.875GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

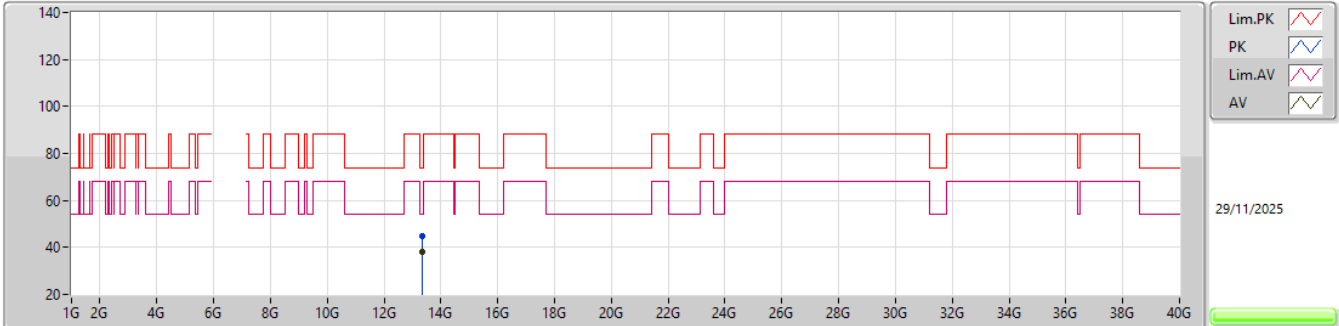
6665MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37176G	43.76	74.00	-30.24	56.62	3	Vertical	356	1.74	-	40.04	11.94	64.84			
AV	13.33G	36.21	54.00	-17.79	49.31	3	Vertical	356	1.74	-	39.84	11.91	64.85			

6.525-6.875GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

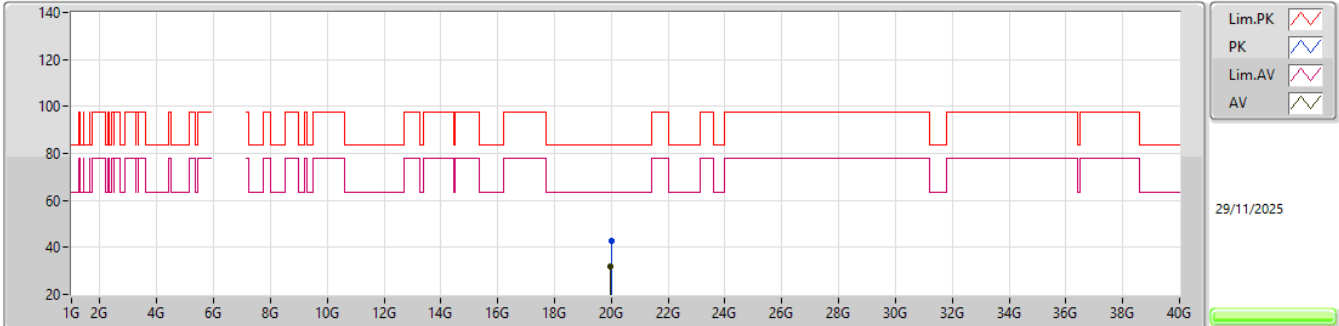
6665MHz_TX

EUT_Y_2TX
SET 108

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.32968G	44.76	74.00	-29.24	57.86	3	Horizontal	16	1.71	-	39.84	11.91	64.85			
AV	13.33G	38.27	54.00	-15.73	51.37	3	Horizontal	16	1.71	-	39.84	11.91	64.85			

6.525-6.875GHz_802.11ax HEW160_Nss2,(MCS0)_2TX

6665MHz_TX

EUT_Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.01132G	43.01	83.54	-40.53	37.15	1	Vertical	23	2.64	-	37.75	17.37	49.26			
AV	19.9821G	32.04	63.54	-31.50	26.19	1	Vertical	23	2.64	-	37.76	17.36	49.27			