


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6105MHz_TX

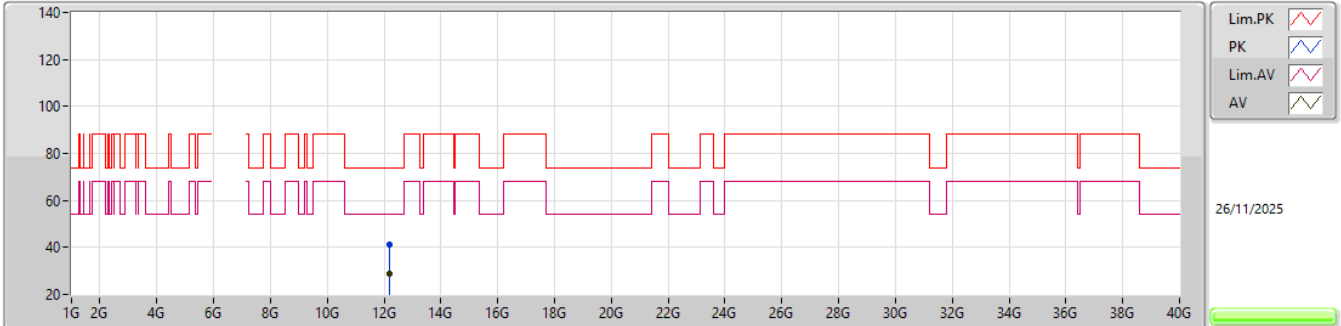


EUT_Y_2TX
Setting 88
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.20832G	41.43	74.00	-32.57	56.91	3	Vertical	28	2.42	-	38.98	11.22	65.68			
AV	12.19842G	28.64	54.00	-25.36	44.10	3	Vertical	28	2.42	-	39.01	11.21	65.68			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6105MHz_TX

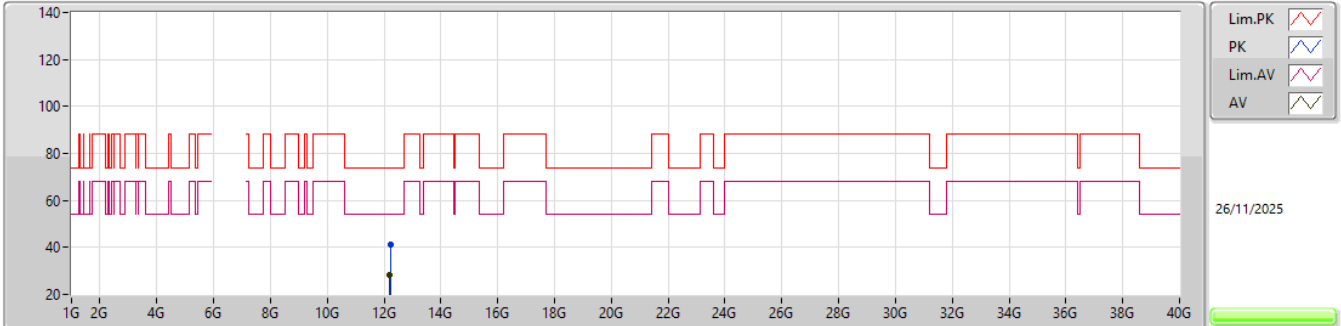


EUT_Y_2TX
Setting 88
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.22302G	41.05	74.00	-32.95	56.54	3	Horizontal	163	2.58	-	38.95	11.23	65.67			
AV	12.1989G	28.44	54.00	-25.56	43.91	3	Horizontal	163	2.58	-	39.00	11.21	65.68			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6105MHz_TX

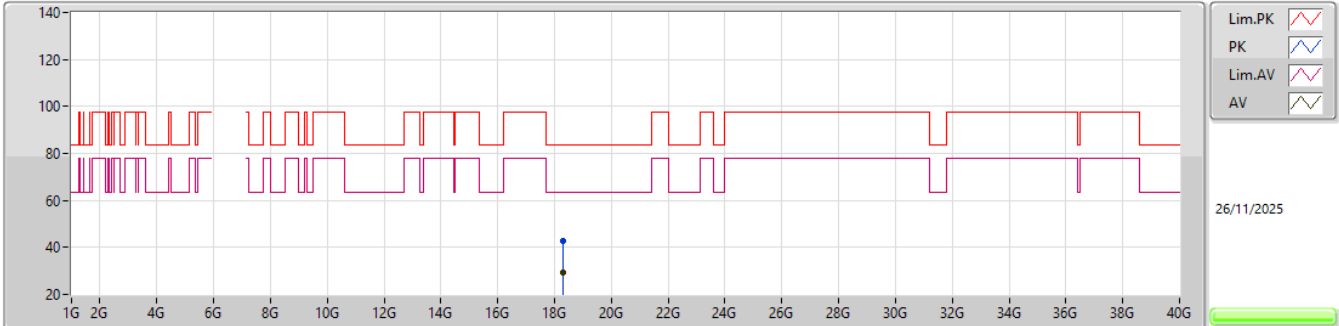


EUT_Y_2TX
Setting 88
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31541G	42.74	83.54	-40.80	38.44	1	Vertical	165	2.67	-	37.50	16.44	49.64			
AV	18.31052G	29.30	63.54	-34.24	24.99	1	Vertical	165	2.67	-	37.50	16.44	49.63			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6105MHz_TX

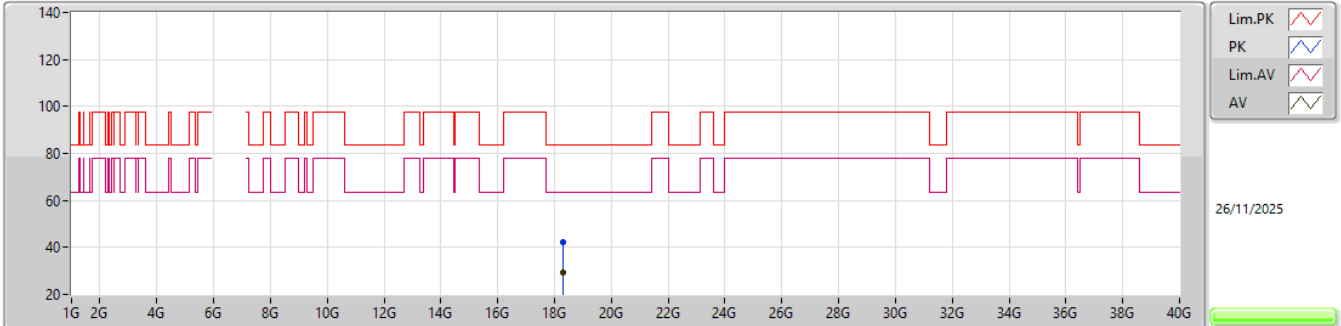


EUT_Y_2TX
Setting 88
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31533G	42.44	83.54	-41.10	38.14	1	Horizontal	113	2.56	-	37.50	16.44	49.64			
AV	18.31067G	29.28	63.54	-34.26	24.97	1	Horizontal	113	2.56	-	37.50	16.44	49.63			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6265MHz_TX

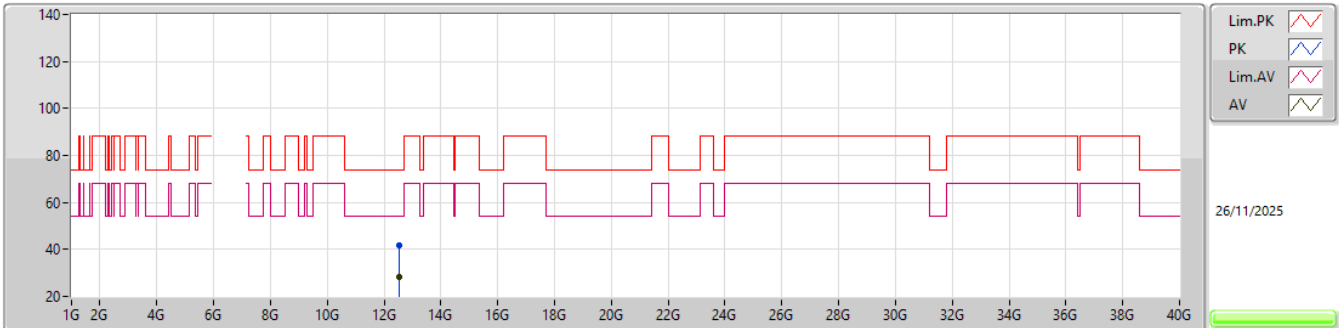


EUT_Y_2TX
Setting 97
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.51656G	41.61	74.00	-32.39	57.15	3	Vertical	132	2.80	-	38.60	11.41	65.55			
AV	12.51758G	28.08	54.00	-25.92	43.62	3	Vertical	132	2.80	-	38.60	11.41	65.55			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6265MHz_TX

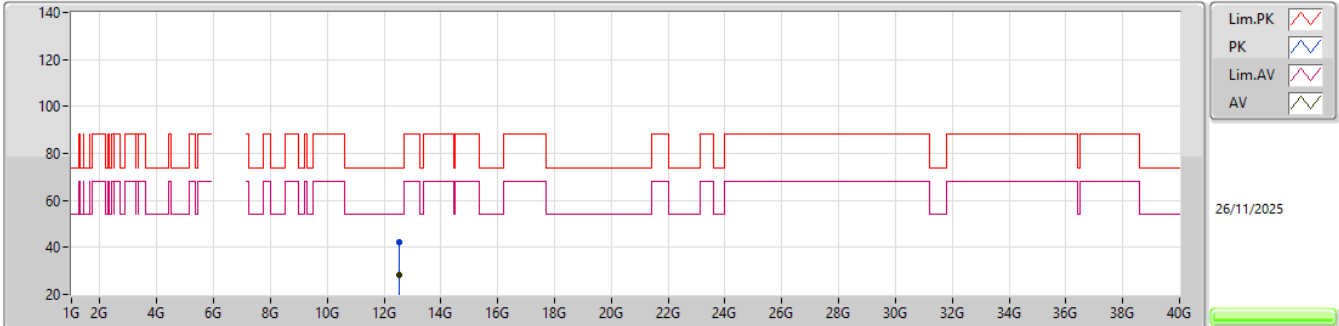


EUT_Y_2TX
Setting 97
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.52184G	42.15	74.00	-31.85	57.68	3	Horizontal	250	1.02	-	38.60	11.41	65.54			
AV	12.51704G	28.16	54.00	-25.84	43.70	3	Horizontal	250	1.02	-	38.60	11.41	65.55			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6265MHz_TX

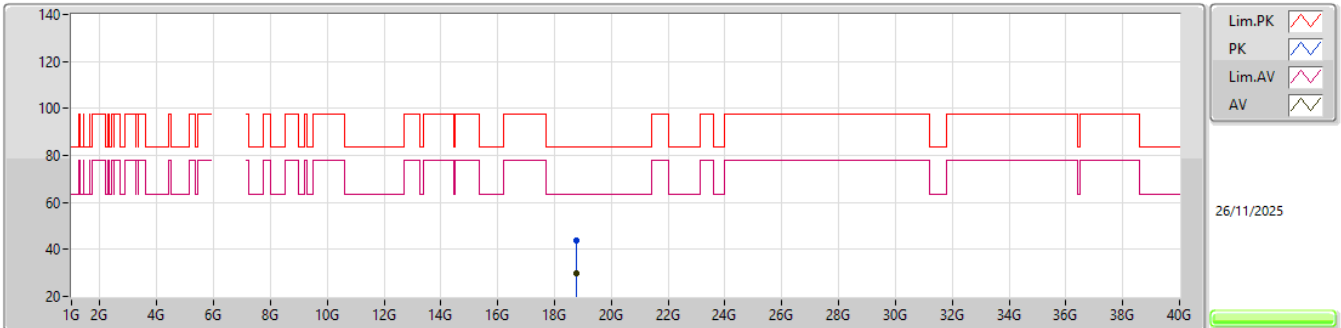


EUT_Y_2TX
Setting 97
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.79093G	43.56	83.54	-39.98	38.64	1	Vertical	97	2.54	-	37.72	16.68	49.48			
AV	18.79034G	29.92	63.54	-33.62	25.00	1	Vertical	97	2.54	-	37.72	16.68	49.48			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6265MHz_TX

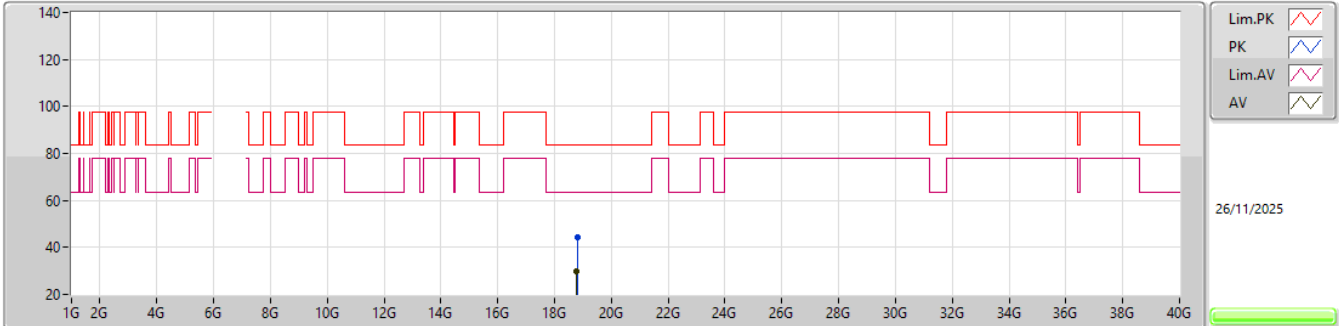


EUT_Y_2TX
Setting 97
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.79766G	44.06	83.54	-39.48	39.15	1	Horizontal	295	1.92	-	37.70	16.69	49.48			
AV	18.79014G	30.01	63.54	-33.53	25.09	1	Horizontal	295	1.92	-	37.72	16.68	49.48			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6425MHz_TX

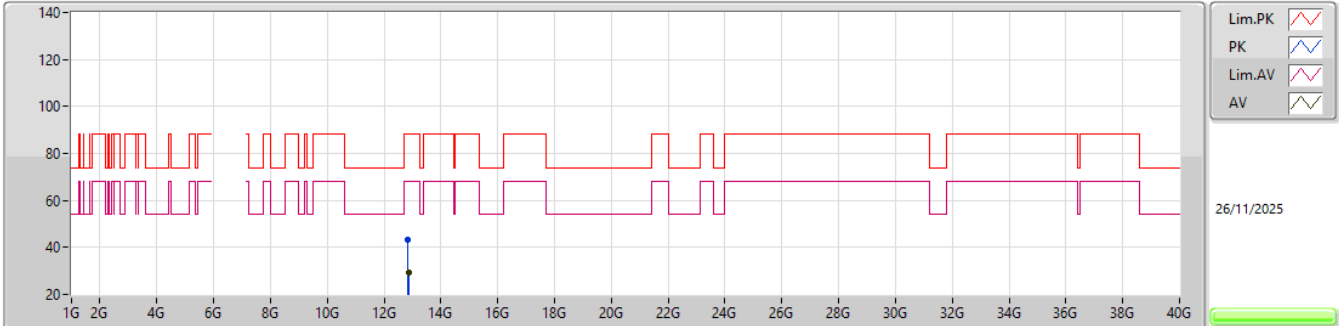


EUT_Y_2TX
Setting 93
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.84742G	43.25	88.20	-44.95	57.23	3	Vertical	77	2.42	-	39.49	11.62	65.09			
RMS	12.85846G	29.12	68.20	-39.08	43.10	3	Vertical	77	2.42	-	39.48	11.62	65.08			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6425MHz_TX

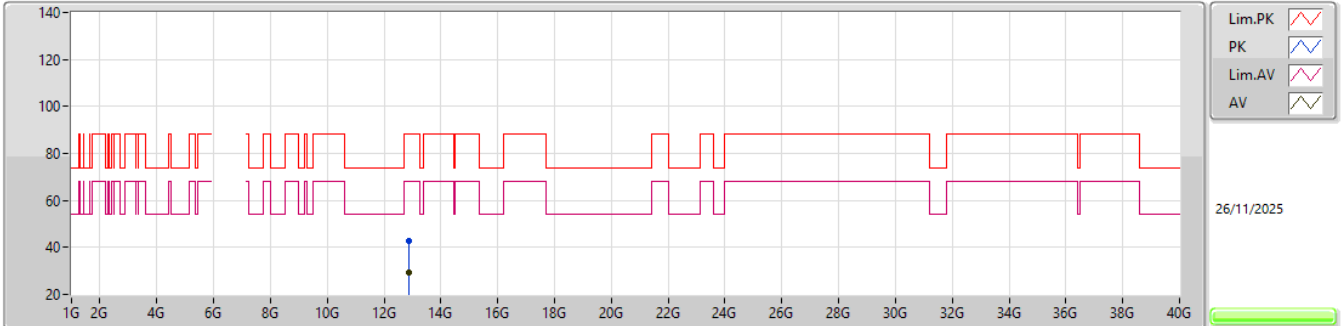


EUT_Y_2TX
Setting 93
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.86248G	42.97	88.20	-45.23	56.94	3	Horizontal	66	2.53	-	39.48	11.62	65.07			
RMS	12.8587G	29.08	68.20	-39.12	43.05	3	Horizontal	66	2.53	-	39.48	11.62	65.07			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6425MHz_TX

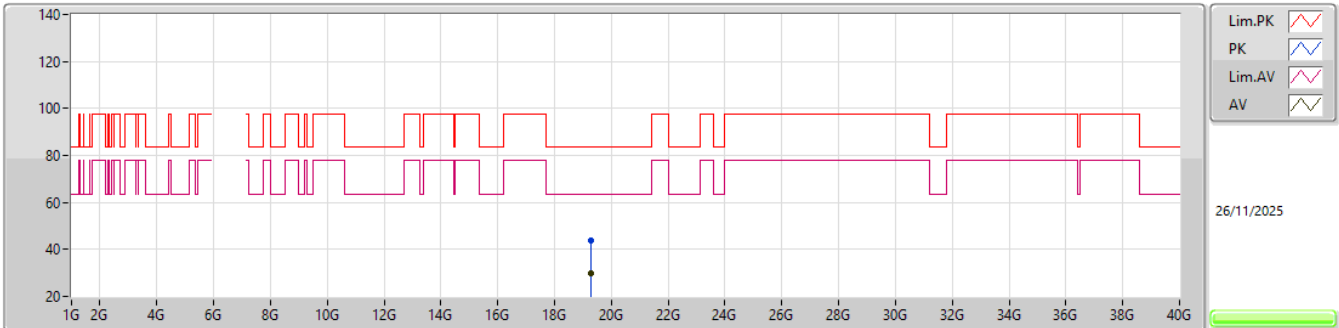


EUT_Y_2TX
Setting 93
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.27355G	43.86	83.54	-39.68	38.57	1	Vertical	3	2.71	-	37.81	16.95	49.47			
AV	19.27038G	29.88	63.54	-33.66	24.58	1	Vertical	3	2.71	-	37.82	16.95	49.47			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6425MHz_TX

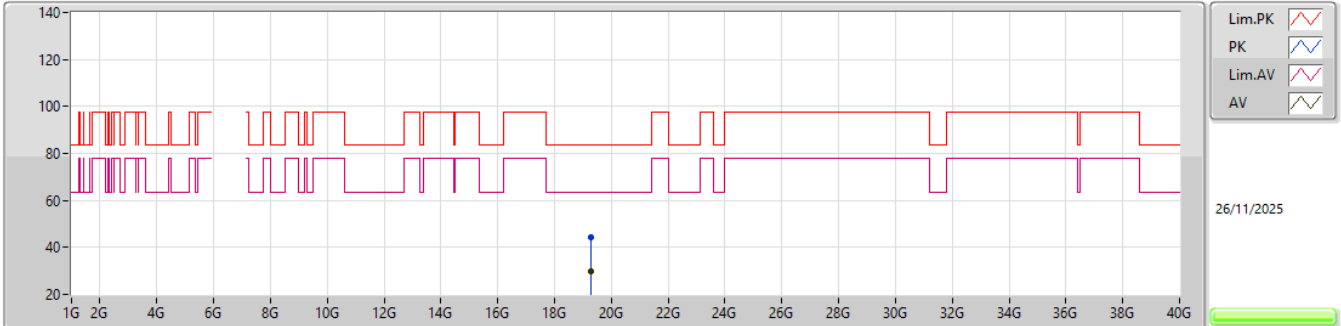


EUT_Y_2TX
Setting 93
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.27297G	44.55	83.54	-38.99	39.26	1	Horizontal	24	1.47	-	37.81	16.95	49.47			
AV	19.27074G	29.79	63.54	-33.75	24.49	1	Horizontal	24	1.47	-	37.82	16.95	49.47			

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6585MHz_TX

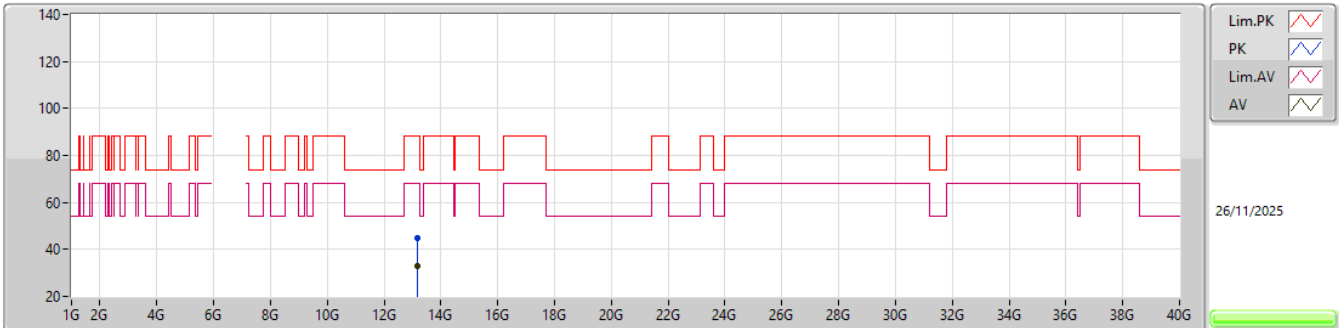


EUT_Y_2TX
Setting 91
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.18338G	44.80	88.20	-43.40	58.34	3	Vertical	67	2.74	-	39.50	11.82	64.86			
RMS	13.18416G	32.72	68.20	-35.48	46.26	3	Vertical	67	2.74	-	39.50	11.82	64.86			

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6585MHz_TX

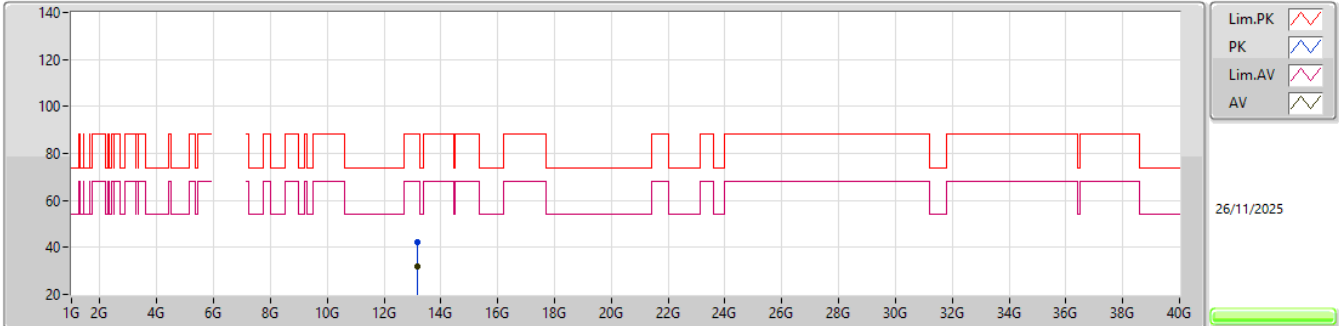


EUT_Y_2TX
Setting 91
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.18464G	42.19	88.20	-46.01	55.73	3	Horizontal	196	2.92	-	39.50	11.82	64.86			
RMS	13.18332G	31.88	68.20	-36.32	45.42	3	Horizontal	196	2.92	-	39.50	11.82	64.86			

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6585MHz_TX

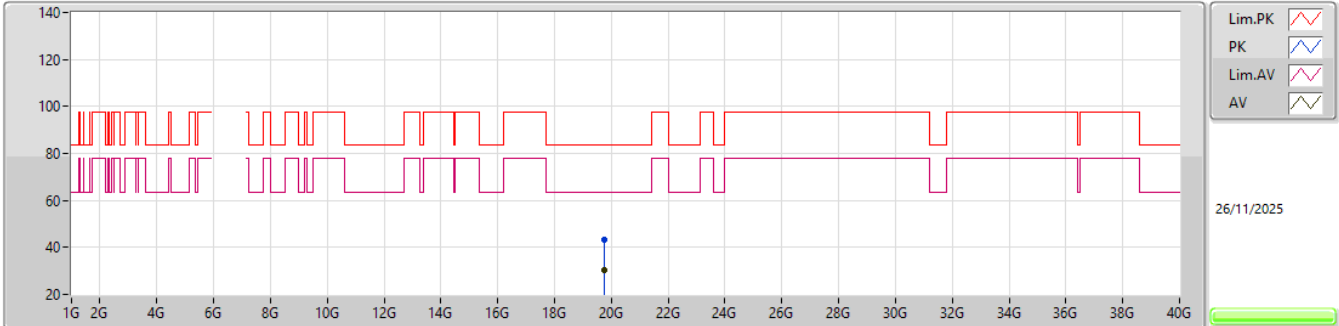


EUT_Y_2TX
Setting 91
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.75624G	43.52	83.54	-40.02	38.10	1	Vertical	199	1.56	-	37.62	17.23	49.43			
AV	19.7572G	30.10	63.54	-33.44	24.67	1	Vertical	199	1.56	-	37.63	17.23	49.43			

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6585MHz_TX

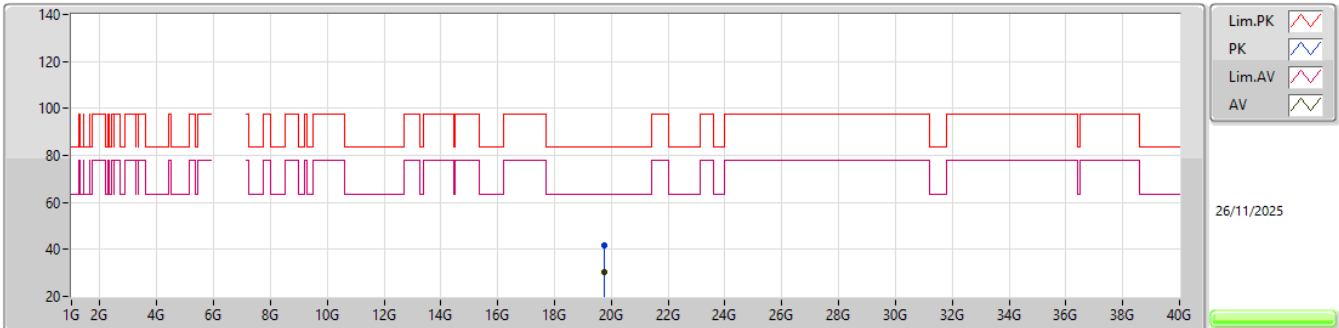


EUT_Y_2TX
Setting 91
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.75958G	41.82	83.54	-41.72	36.37	1	Horizontal	18	2.24	-	37.64	17.23	49.42			
AV	19.75025G	30.13	63.54	-33.41	24.73	1	Horizontal	18	2.24	-	37.60	17.23	49.43			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6745MHz_TX

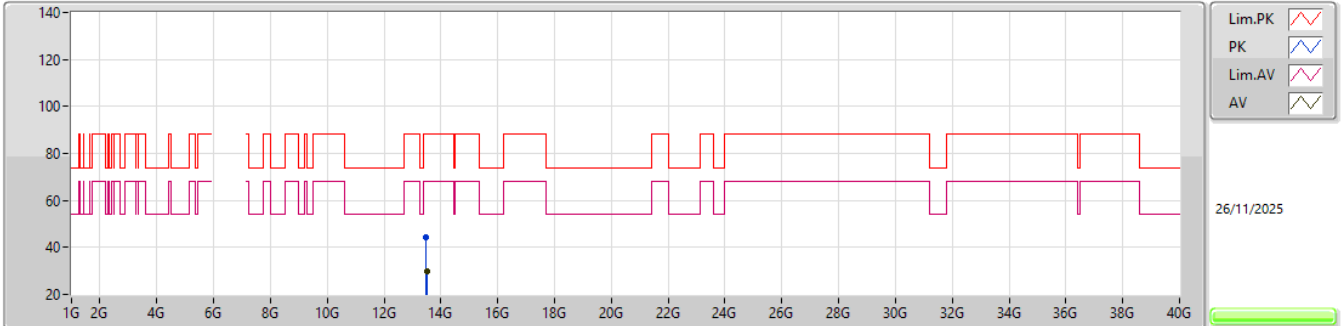


EUT_Y_2TX
Setting 96
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.48634G	44.14	88.20	-44.06	56.79	3	Vertical	234	1.68	-	40.17	12.01	64.83			
RMS	13.5047G	30.07	68.20	-38.13	42.65	3	Vertical	234	1.68	-	40.23	12.02	64.83			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6745MHz_TX

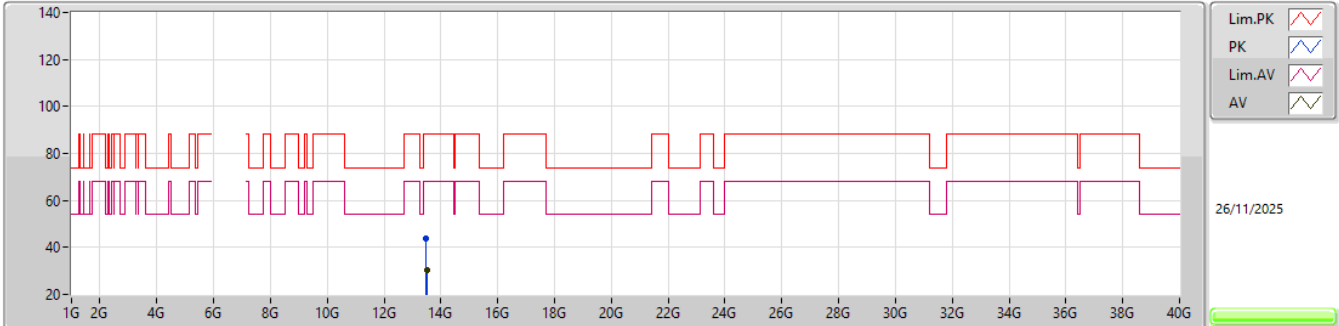


EUT_Y_2TX
Setting 96
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.48562G	43.59	88.20	-44.61	56.24	3	Horizontal	154	2.76	-	40.17	12.01	64.83			
RMS	13.50302G	30.11	68.20	-38.09	42.70	3	Horizontal	154	2.76	-	40.22	12.02	64.83			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6745MHz_TX

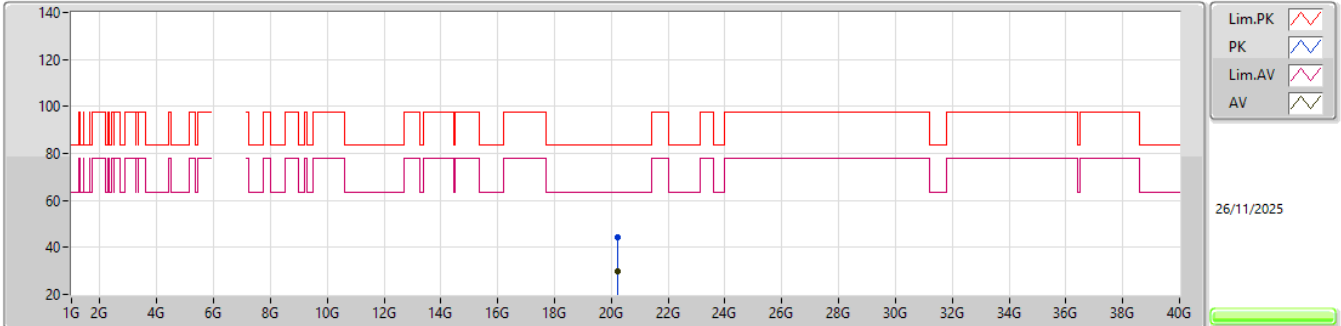


EUT_Y_2TX
Setting 96
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.23151G	44.53	83.54	-39.01	38.72	1	Vertical	193	2.98	-	37.66	17.40	49.25			
AV	20.2395G	29.63	63.54	-33.91	23.80	1	Vertical	193	2.98	-	37.68	17.40	49.25			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6745MHz_TX

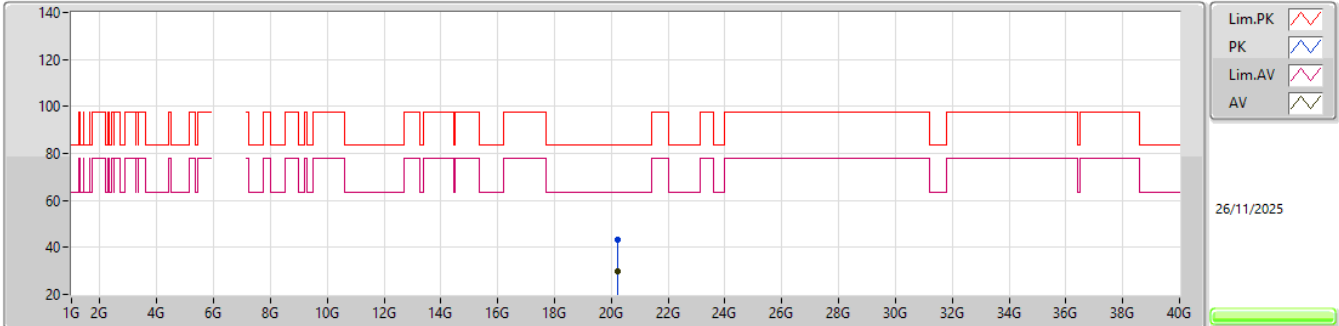


EUT_Y_2TX
Setting 96
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.23973G	43.52	83.54	-40.02	37.69	1	Horizontal	345	1.27	-	37.68	17.40	49.25			
AV	20.23961G	29.82	63.54	-33.72	23.99	1	Horizontal	345	1.27	-	37.68	17.40	49.25			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6905MHz_TX

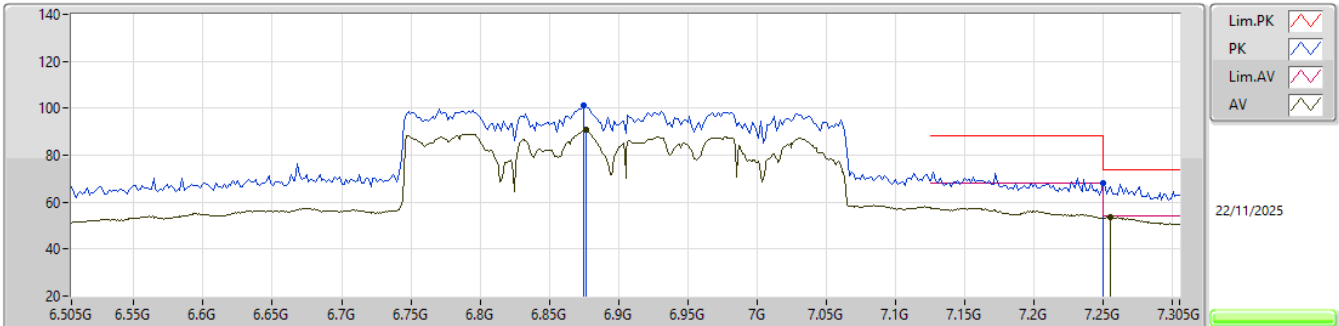


EUT_Y_2TX
Setting 84
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	6.8746G	101.21	Inf	-Inf	91.65	3	Vertical	345	1.05	-	34.75	8.22	33.41			
RMS	6.8762G	90.67	Inf	-Inf	81.10	3	Vertical	345	1.05	-	34.76	8.22	33.41			
PK	7.25G	68.05	74.00	-5.95	56.58	3	Vertical	345	1.05	-	36.40	8.58	33.51			
AV	7.2554G	53.78	54.00	-0.22	42.27	3	Vertical	345	1.05	-	36.42	8.60	33.51			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6905MHz_TX

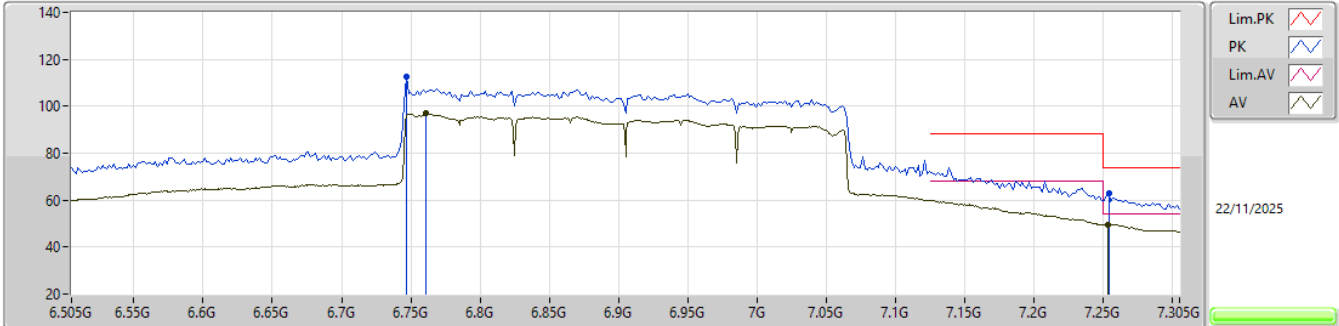


EUT_Y_2TX
Setting 84
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	6.7466G	112.66	Inf	-Inf	103.73	3	Horizontal	72	1.48	-	34.31	8.04	33.42			
RMS	6.761G	97.09	Inf	-Inf	88.13	3	Horizontal	72	1.48	-	34.32	8.05	33.41			
PK	7.2538G	62.78	74.00	-11.22	51.28	3	Horizontal	72	1.48	-	36.42	8.59	33.51			
AV	7.253G	49.55	54.00	-4.45	38.06	3	Horizontal	72	1.48	-	36.41	8.59	33.51			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6905MHz_TX

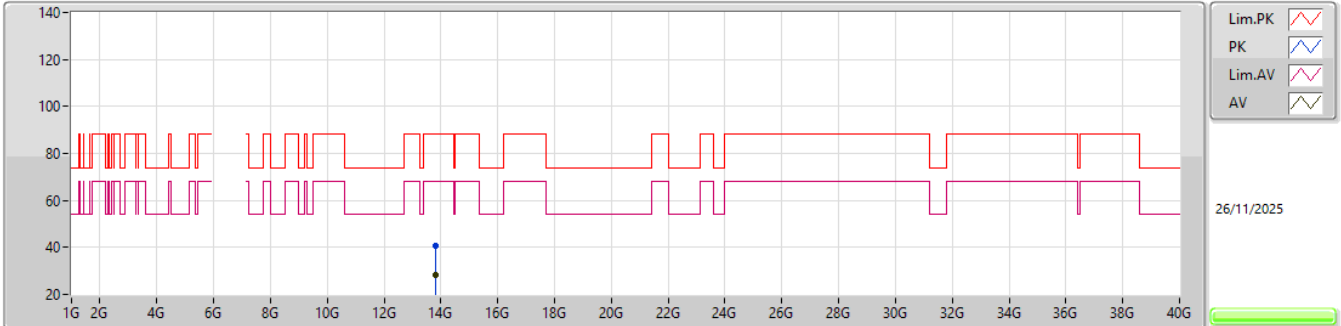


EUT_Y_2TX
Setting 84
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.82458G	40.82	88.20	-47.38	52.98	3	Vertical	320	2.77	-	40.30	12.22	64.68			
RMS	13.82416G	28.36	68.20	-39.84	40.52	3	Vertical	320	2.77	-	40.30	12.22	64.68			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6905MHz_TX

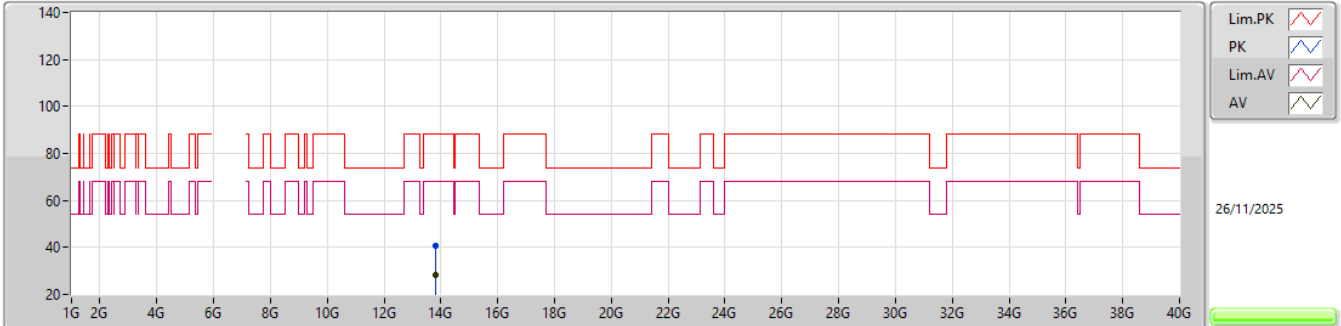


EUT_Y_2TX
Setting 84
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.8169G	40.78	88.20	-47.42	52.94	3	Horizontal	238	1.50	-	40.30	12.22	64.68			
RMS	13.82374G	28.53	68.20	-39.67	40.69	3	Horizontal	238	1.50	-	40.30	12.22	64.68			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6905MHz_TX

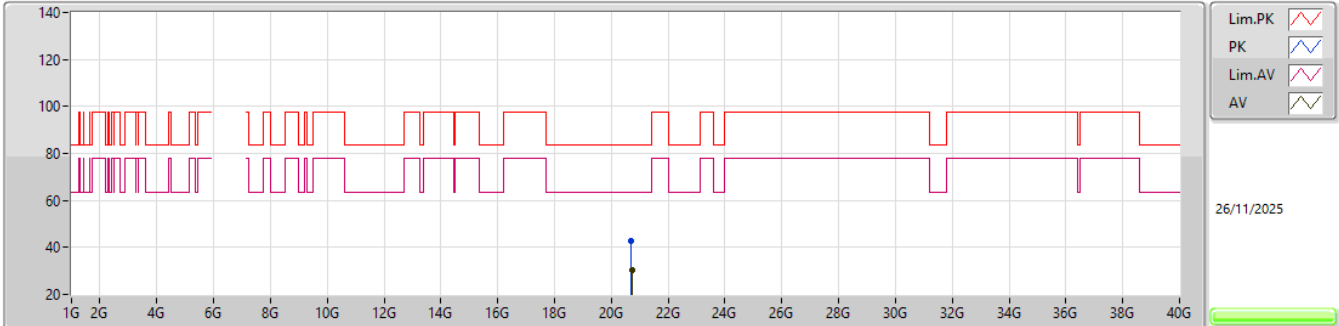


EUT_Y_2TX
Setting 84
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.71097G	42.92	83.54	-40.62	36.80	1	Vertical	281	3.00	-	37.77	17.47	49.12			
AV	20.71976G	30.18	63.54	-33.36	24.01	1	Vertical	281	3.00	-	37.82	17.47	49.12			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6905MHz_TX

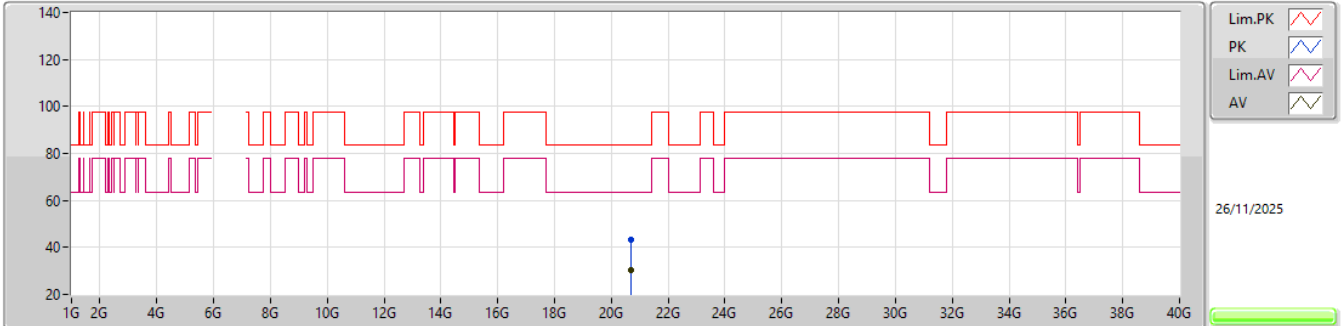


EUT_Y_2TX
Setting 84
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.71038G	43.42	83.54	-40.12	37.31	1	Horizontal	35	1.91	-	37.76	17.47	49.12			
AV	20.71279G	30.12	63.54	-33.42	23.99	1	Horizontal	35	1.91	-	37.78	17.47	49.12			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

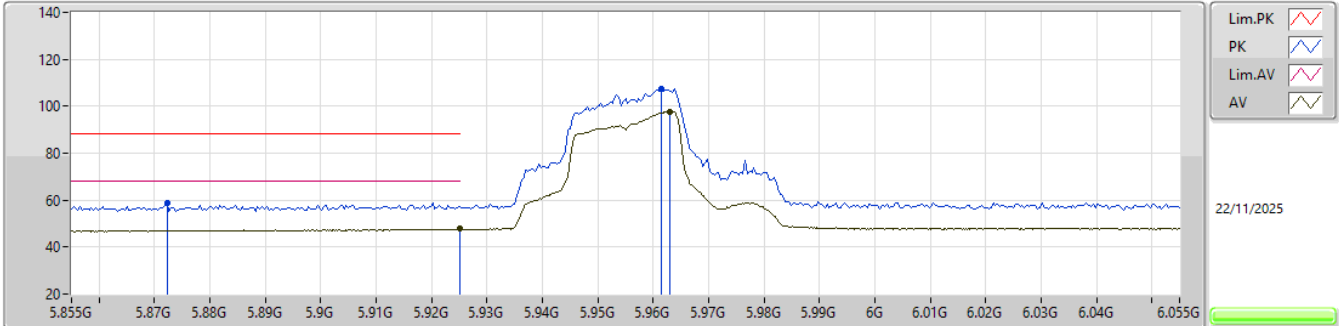


EUT_Y_4TX
Setting 41
06-U-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.8722G	58.85	88.20	-29.35	53.00	3	Vertical	53	1.56	-	32.14	7.48	33.77			
RMS	5.925G	47.71	68.20	-20.49	41.64	3	Vertical	53	1.56	-	32.25	7.58	33.76			
PK	5.9614G	107.59	Inf	-Inf	101.38	3	Vertical	53	1.56	-	32.32	7.64	33.75			
RMS	5.963G	97.80	Inf	-Inf	91.58	3	Vertical	53	1.56	-	32.33	7.64	33.75			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

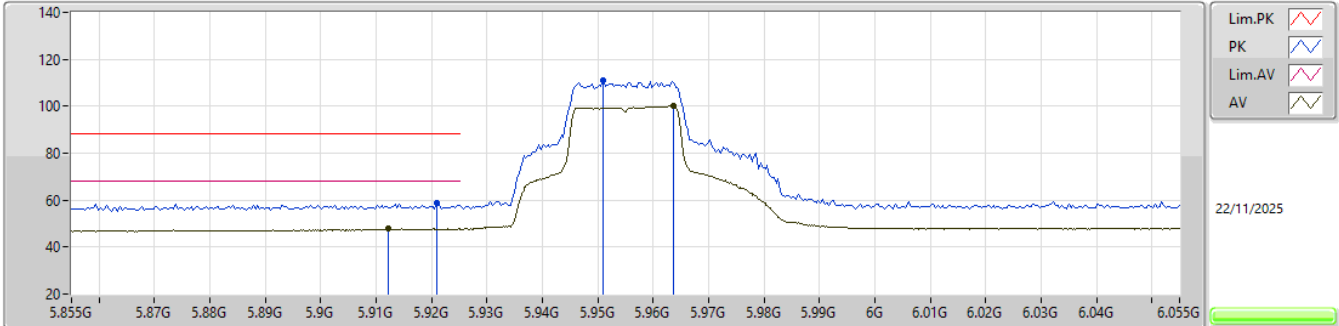


EUT_Y_4TX
Setting 41
06-U-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.921G	58.55	88.20	-29.65	52.50	3	Horizontal	285	1.92	-	32.24	7.57	33.76			
RMS	5.9122G	47.78	68.20	-20.42	41.77	3	Horizontal	285	1.92	-	32.22	7.55	33.76			
PK	5.951G	110.92	Inf	-Inf	104.76	3	Horizontal	285	1.92	-	32.30	7.62	33.76			
RMS	5.9636G	100.23	Inf	-Inf	94.01	3	Horizontal	285	1.92	-	32.33	7.64	33.75			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

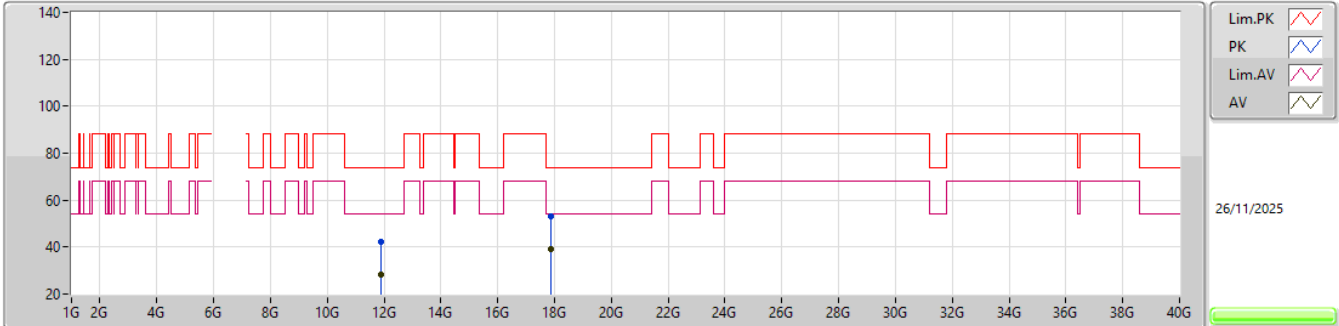


EUT_Y_4TX
Setting 41
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.89674G	42.34	74.00	-31.66	58.33	3	Vertical	55	2.12	-	38.79	11.06	65.84			
AV	11.91318G	28.31	54.00	-25.69	44.27	3	Vertical	55	2.12	-	38.80	11.07	65.83			
PK	17.8623G	53.34	74.00	-20.66	55.36	3	Vertical	308	2.48	-	47.27	14.73	64.02			
AV	17.87844G	39.28	54.00	-14.72	40.67	3	Vertical	308	2.48	-	47.88	14.74	64.01			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

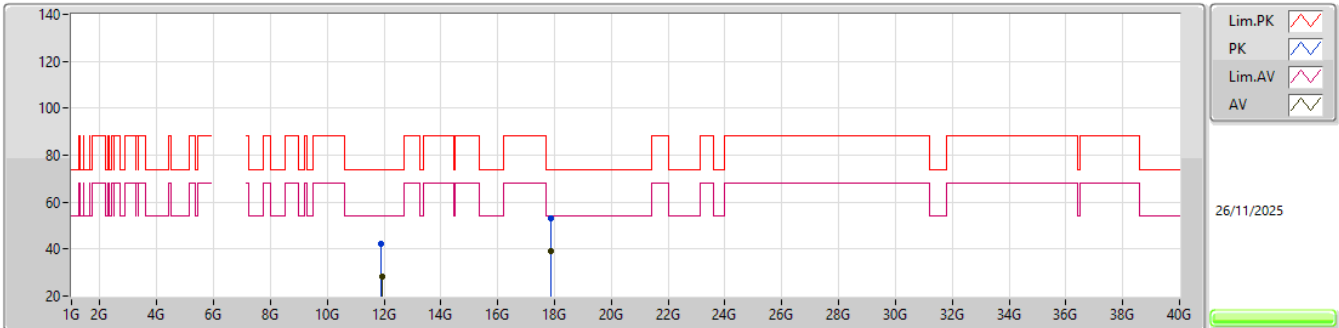


EUT_Y_4TX
Setting 41
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.91252G	42.29	74.00	-31.71	58.25	3	Horizontal	305	1.56	-	38.80	11.07	65.83			
AV	11.9154G	28.18	54.00	-25.82	44.14	3	Horizontal	305	1.56	-	38.80	11.07	65.83			
PK	17.87412G	52.91	74.00	-21.09	54.46	3	Horizontal	205	1.66	-	47.72	14.74	64.01			
AV	17.87946G	39.29	54.00	-14.71	40.64	3	Horizontal	205	1.66	-	47.92	14.74	64.01			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

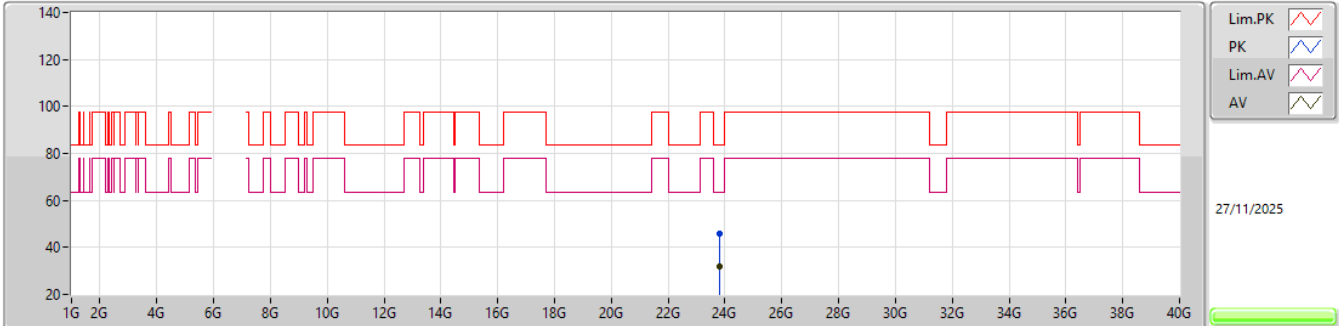


EUT_Y_4TX
Setting 41
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.8101G	46.08	83.54	-37.46	35.71	1	Vertical	29	1.78	-	38.76	18.76	47.15			
AV	23.81577G	32.00	63.54	-31.54	21.64	1	Vertical	29	1.78	-	38.74	18.76	47.14			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

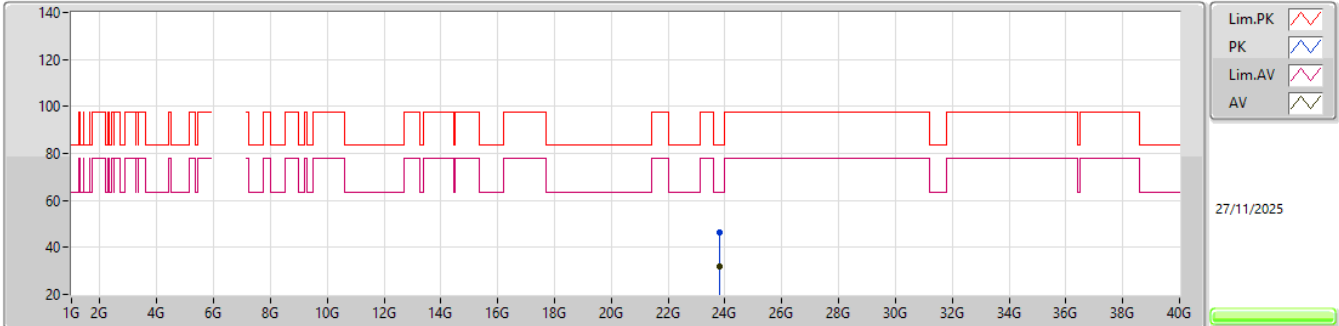


EUT_Y_4TX
Setting 41
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81634G	46.61	83.54	-36.93	36.26	1	Horizontal	340	1.14	-	38.73	18.76	47.14			
AV	23.81919G	32.03	63.54	-31.51	21.69	1	Horizontal	340	1.14	-	38.72	18.76	47.14			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

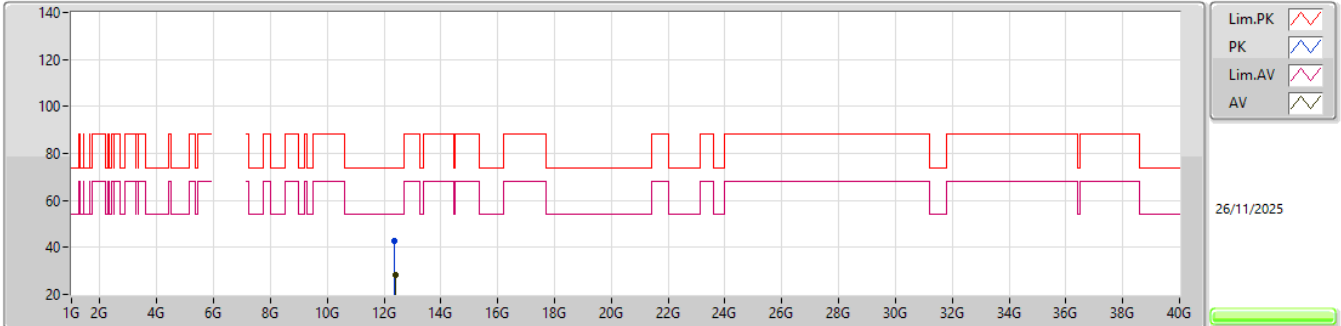


EUT_V_4TX
Setting 40
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.37578G	42.60	74.00	-31.40	58.14	3	Vertical	207	2.25	-	38.75	11.32	65.61			
AV	12.3939G	28.44	54.00	-25.56	44.01	3	Vertical	207	2.25	-	38.71	11.33	65.61			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

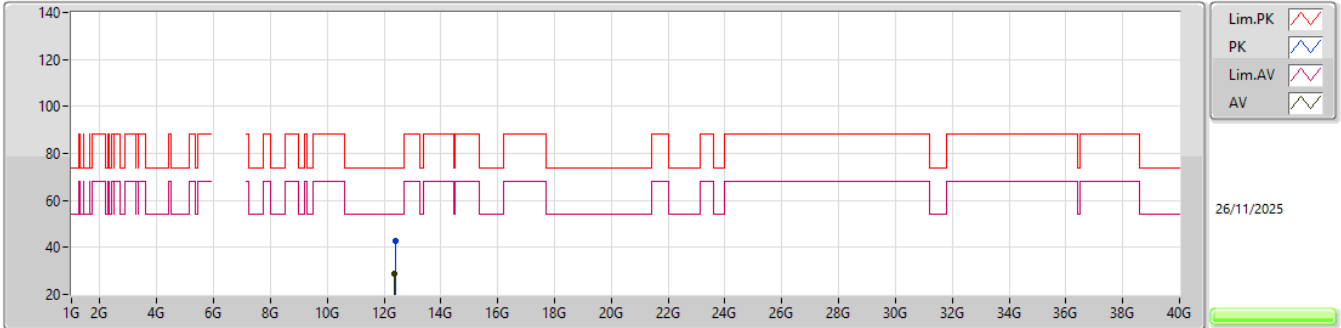


EUT_Y_4TX
Setting 40
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38664G	42.56	74.00	-31.44	58.11	3	Horizontal	70	1.02	-	38.73	11.33	65.61			
AV	12.37644G	28.55	54.00	-25.45	44.09	3	Horizontal	70	1.02	-	38.75	11.32	65.61			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

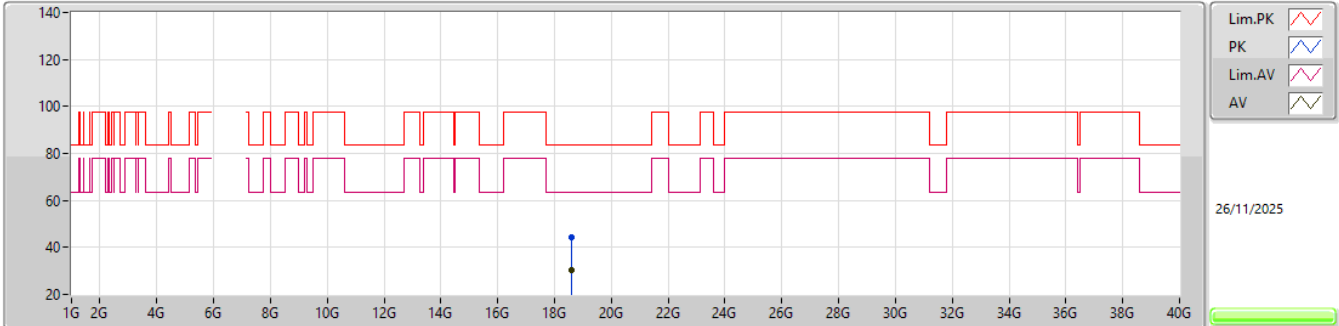


EUT_V_4TX
Setting 40
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58488G	44.31	83.54	-39.23	39.71	1	Vertical	193	1.63	-	37.67	16.58	49.65			
AV	18.5842G	30.11	63.54	-33.43	25.51	1	Vertical	193	1.63	-	37.67	16.58	49.65			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


6195MHz_TX

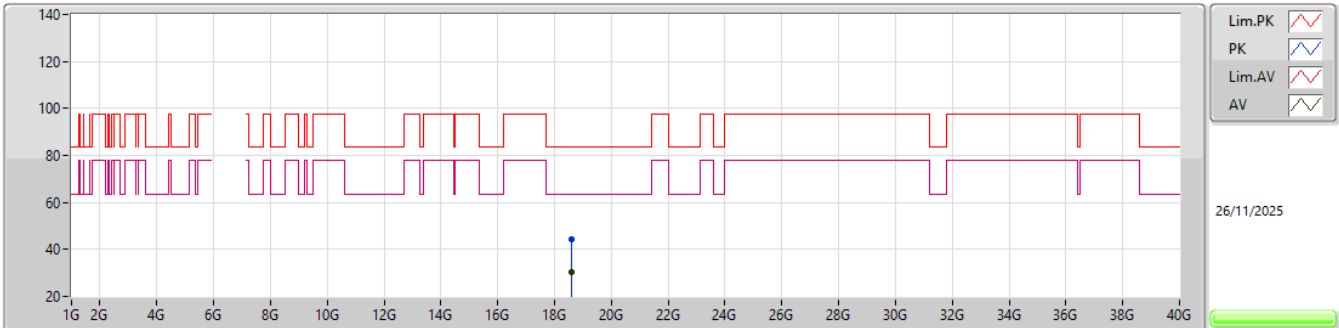EUT_V_4TX
Setting 40
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58666G	44.30	83.54	-39.24	39.70	1	Horizontal	183	2.65	-	37.67	16.58	49.65			
AV	18.58062G	30.09	63.54	-33.45	25.50	1	Horizontal	183	2.65	-	37.66	16.58	49.65			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


6415MHz_TX

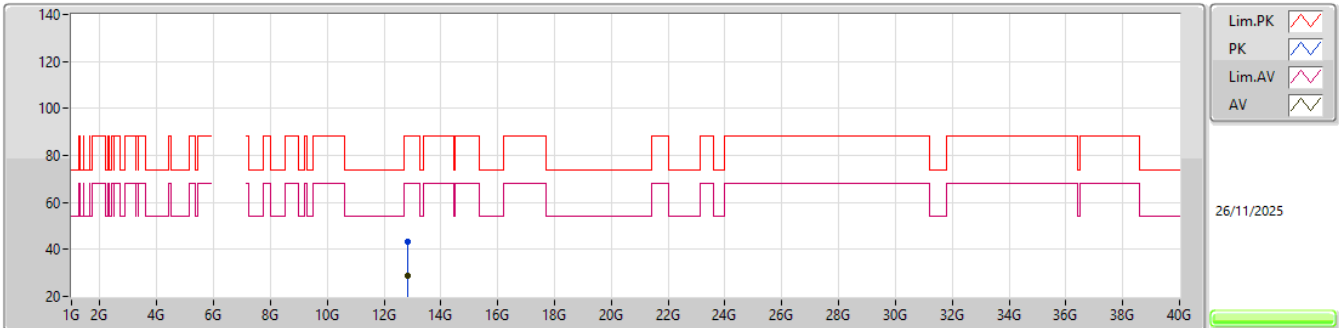EUT_V_4TX
Setting 39
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.84344G	43.04	88.20	-45.16	57.04	3	Vertical	347	2.40	-	39.49	11.61	65.10			
RMS	12.84434G	29.05	68.20	-39.15	43.04	3	Vertical	347	2.40	-	39.49	11.61	65.09			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

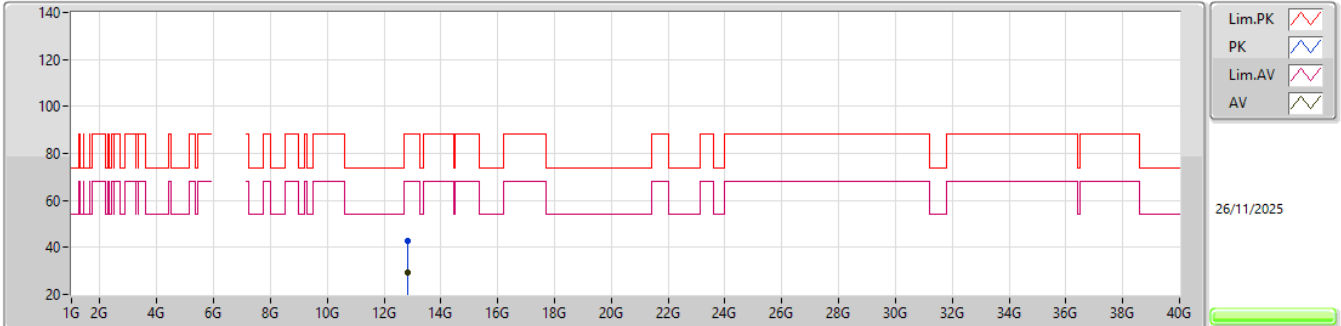


EUT_V_4TX
Setting 39
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83048G	42.69	88.20	-45.51	56.74	3	Horizontal	244	1.97	-	39.46	11.60	65.11			
RMS	12.84434G	29.06	68.20	-39.14	43.05	3	Horizontal	244	1.97	-	39.49	11.61	65.09			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

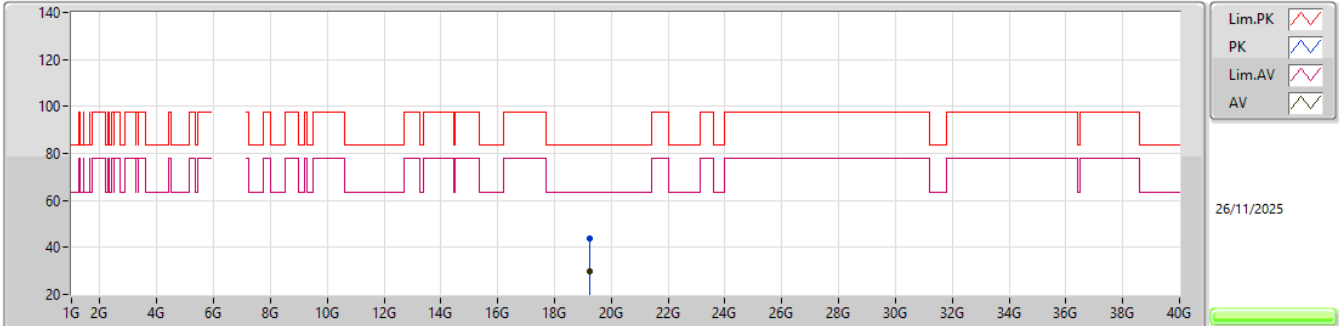


EUT_Y_4TX
Setting 39
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24145G	43.85	83.54	-39.69	38.50	1	Vertical	223	2.94	-	37.87	16.93	49.45			
AV	19.24157G	29.88	63.54	-33.66	24.53	1	Vertical	223	2.94	-	37.87	16.93	49.45			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

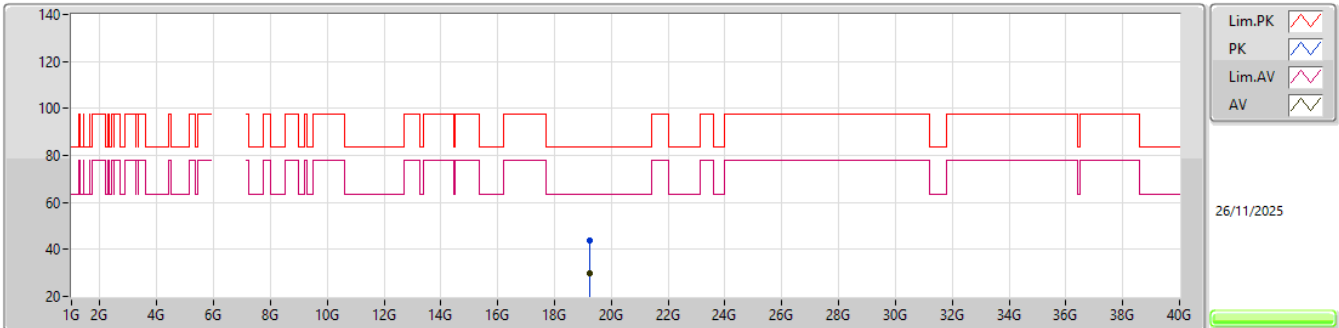


EUT_Y_4TX
Setting 39
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2486G	43.63	83.54	-39.91	38.26	1	Horizontal	152	1.25	-	37.89	16.93	49.45			
AV	19.24183G	29.90	63.54	-33.64	24.55	1	Horizontal	152	1.25	-	37.87	16.93	49.45			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

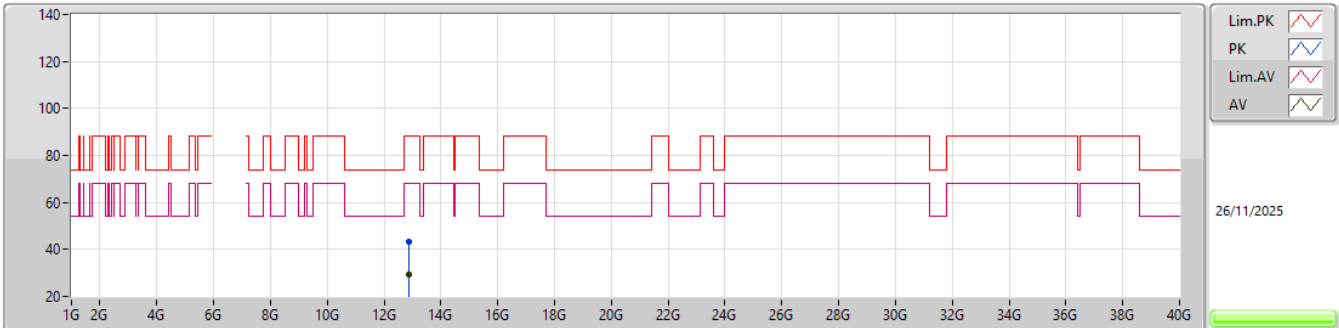


EUT_V_4TX
Setting 47
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.86502G	43.27	88.20	-44.93	57.24	3	Vertical	160	1.28	-	39.47	11.63	65.07			
RMS	12.85512G	29.15	68.20	-39.05	43.12	3	Vertical	160	1.28	-	39.49	11.62	65.08			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

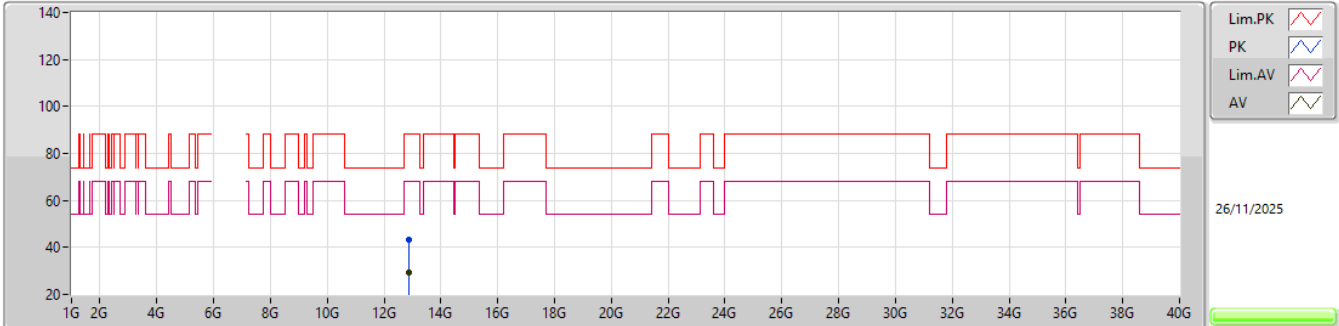


EUT_V_4TX
Setting 47
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.87636G	43.43	88.20	-44.77	57.40	3	Horizontal	154	1.47	-	39.45	11.63	65.05			
RMS	12.85842G	29.19	68.20	-39.01	43.17	3	Horizontal	154	1.47	-	39.48	11.62	65.08			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

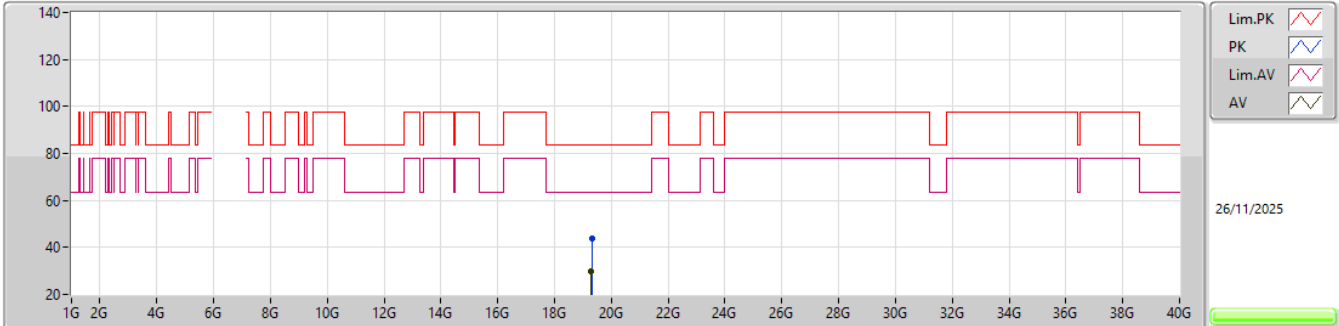


EUT_Y_4TX
Setting 47
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.30572G	43.81	83.54	-39.73	38.62	1	Vertical	210	1.24	-	37.71	16.97	49.49			
AV	19.30002G	29.78	63.54	-33.76	24.60	1	Vertical	210	1.24	-	37.70	16.96	49.48			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


6435MHz_TX

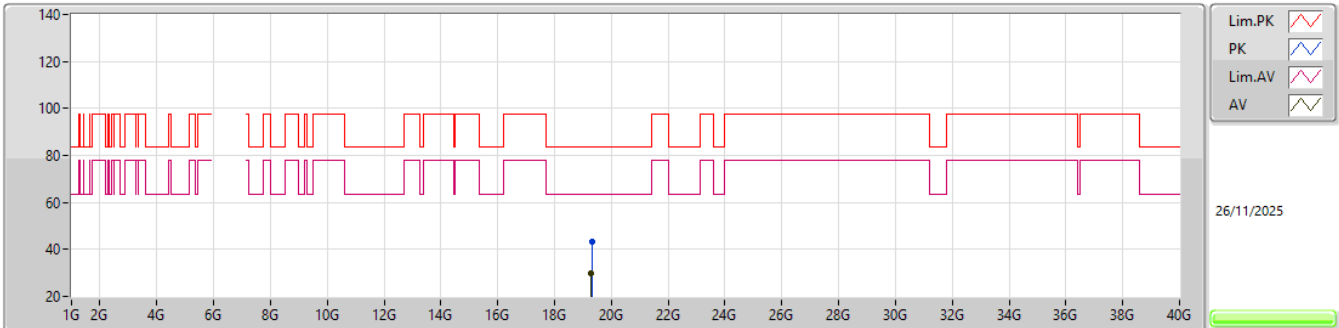EUT_Y_4TX
Setting 47
06-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.30882G	43.44	83.54	-40.10	38.24	1	Horizontal	121	2.01	-	37.72	16.97	49.49			
AV	19.30005G	29.74	63.54	-33.80	24.56	1	Horizontal	121	2.01	-	37.70	16.96	49.48			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6475MHz_TX

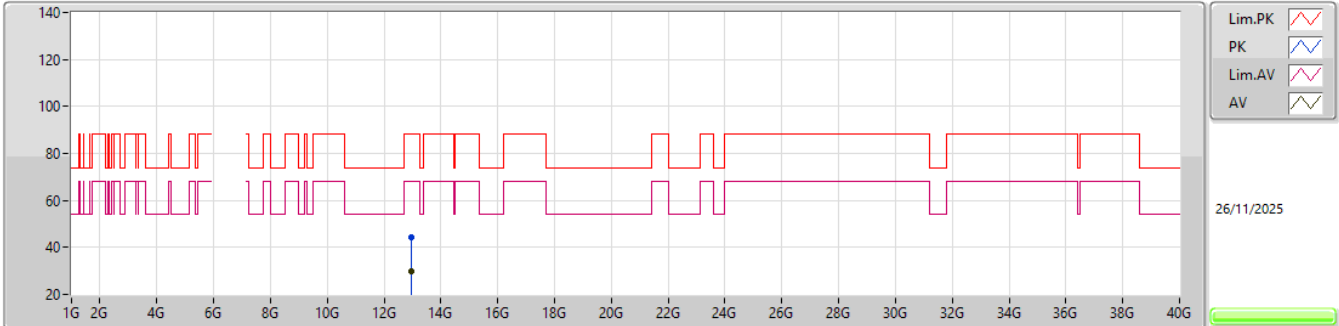


EUT_V_4TX
Setting 49
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96218G	44.16	88.20	-44.04	57.90	3	Vertical	117	2.22	-	39.50	11.69	64.93			
RMS	12.95558G	30.02	68.20	-38.18	43.78	3	Vertical	117	2.22	-	39.50	11.68	64.94			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6475MHz_TX

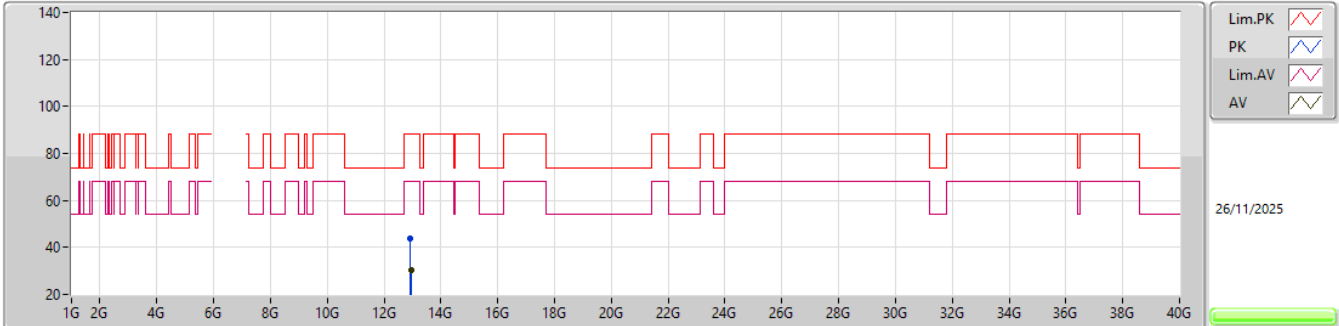


EUT_Y_4TX
Setting 49
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.93566G	44.05	88.20	-44.15	57.88	3	Horizontal	7	1.47	-	39.47	11.67	64.97			
RMS	12.95198G	30.09	68.20	-38.11	43.86	3	Horizontal	7	1.47	-	39.50	11.68	64.95			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6475MHz_TX

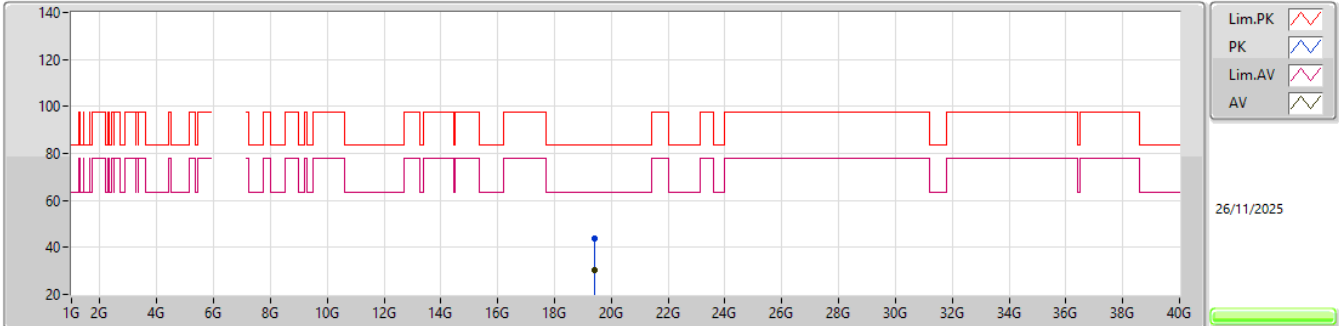


EUT_Y_4TX
Setting 49
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42349G	43.89	83.54	-39.65	38.60	1	Vertical	263	2.94	-	37.81	17.04	49.56			
AV	19.42029G	30.19	63.54	-33.35	24.89	1	Vertical	263	2.94	-	37.82	17.03	49.55			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


6475MHz_TX

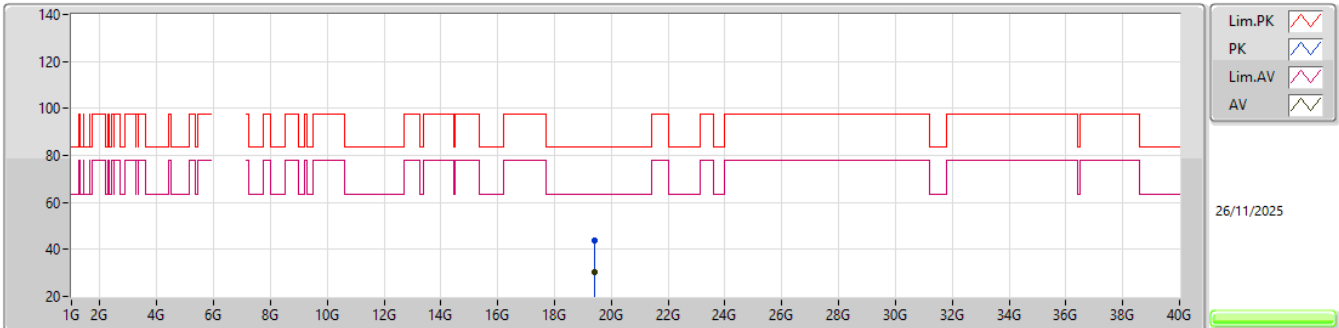EUT_V_4TX
Setting 49
06-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.42453G	43.59	83.54	-39.95	38.31	1	Horizontal	297	1.67	-	37.80	17.04	49.56			
AV	19.42005G	30.12	63.54	-33.42	24.82	1	Horizontal	297	1.67	-	37.82	17.03	49.55			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6515MHz_TX

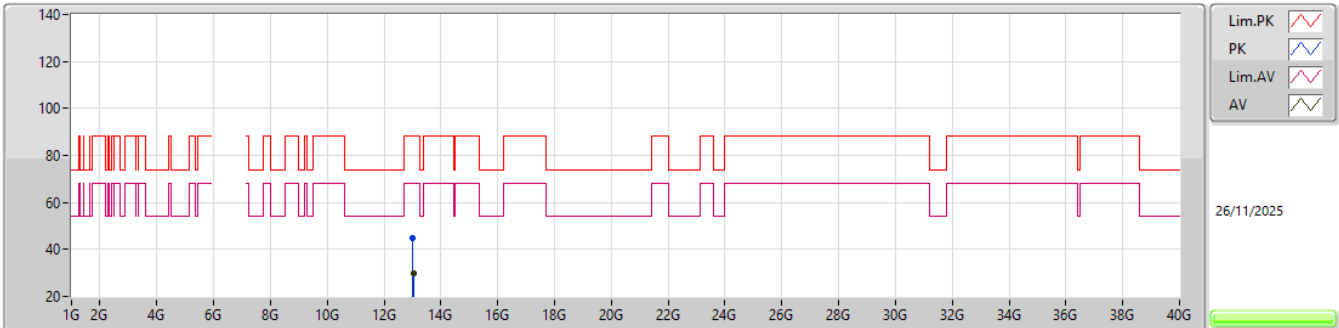


EUT_V_4TX
Setting 38
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.024G	44.62	88.20	-43.58	58.38	3	Vertical	190	2.62	-	39.40	11.72	64.88			
RMS	13.03432G	29.90	68.20	-38.30	43.69	3	Vertical	190	2.62	-	39.36	11.73	64.88			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6515MHz_TX

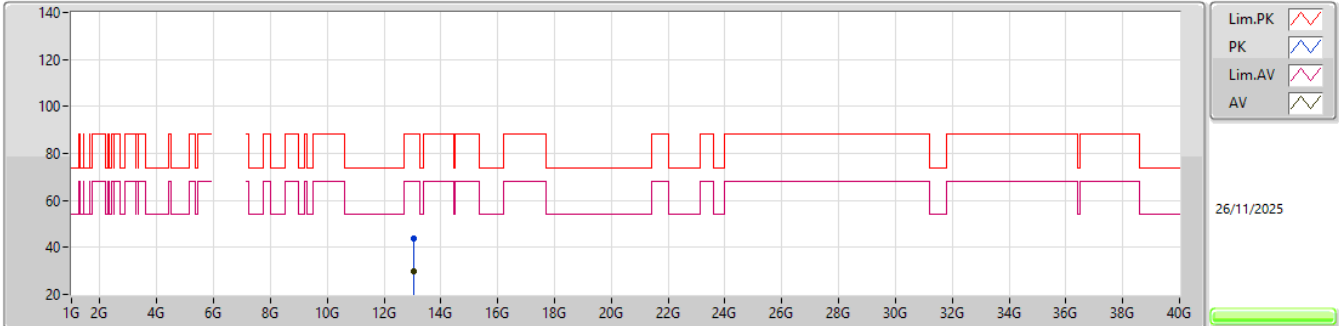


EUT_V_4TX
Setting 38
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.02682G	43.98	88.20	-44.22	57.74	3	Horizontal	144	1.69	-	39.39	11.73	64.88			
RMS	13.04044G	29.95	68.20	-38.25	43.75	3	Horizontal	144	1.69	-	39.34	11.74	64.88			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6515MHz_TX

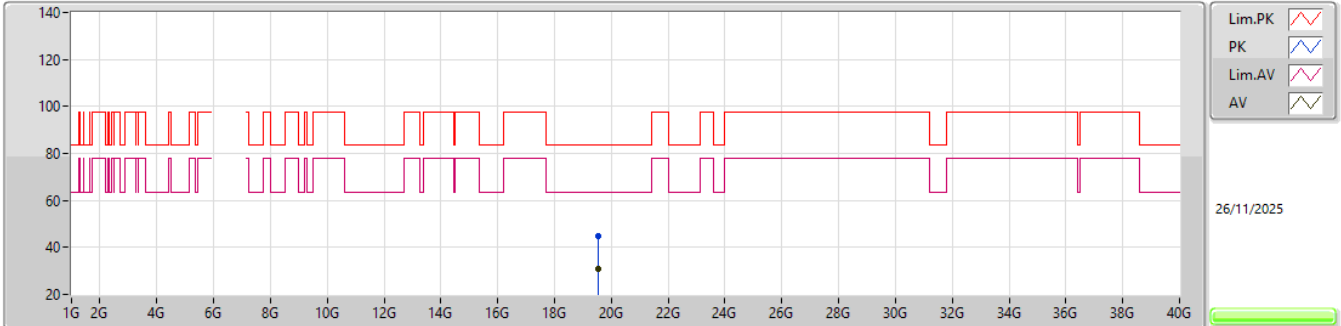


EUT_V_4TX
Setting 38
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54292G	45.01	83.54	-38.53	39.78	1	Vertical	43	1.16	-	37.70	17.10	49.57			
AV	19.54612G	30.63	63.54	-32.91	25.39	1	Vertical	43	1.16	-	37.70	17.11	49.57			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6515MHz_TX

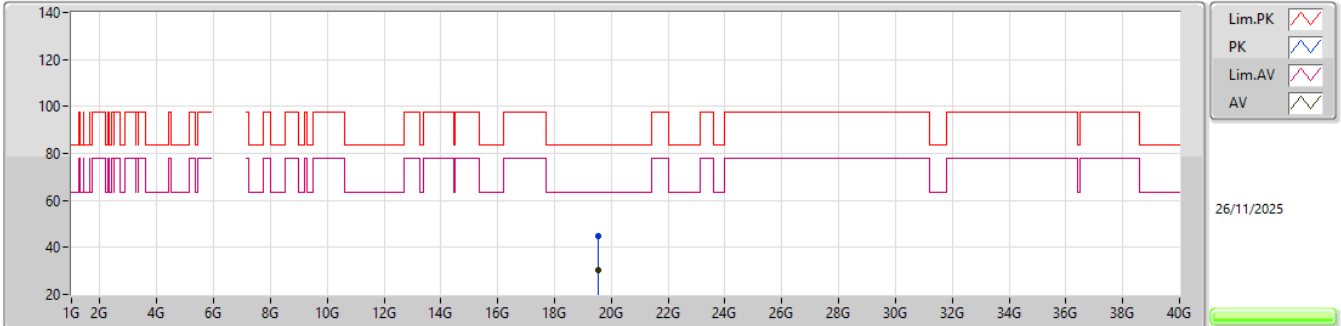


EUT_V_4TX
Setting 38
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54224G	44.72	83.54	-38.82	39.49	1	Horizontal	343	1.65	-	37.70	17.10	49.57			
AV	19.54587G	30.59	63.54	-32.95	25.35	1	Horizontal	343	1.65	-	37.70	17.11	49.57			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

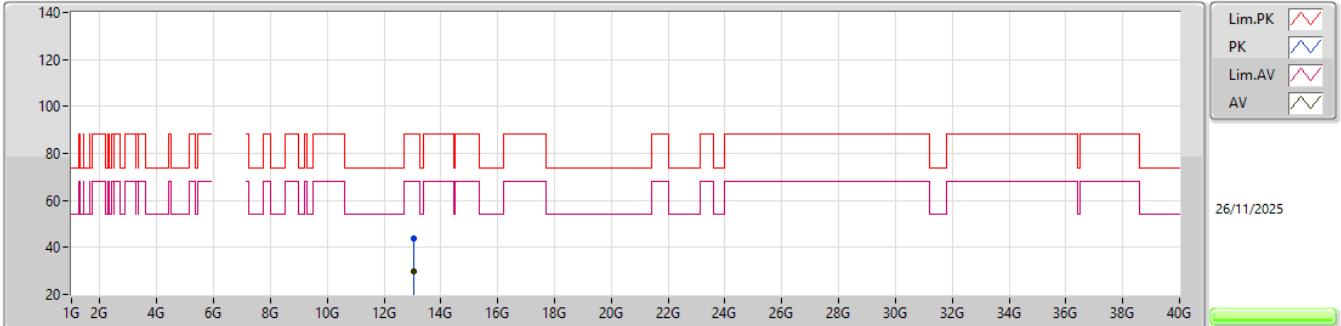


EUT_V_4TX
Setting 41
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05782G	43.84	88.20	-44.36	57.66	3	Vertical	285	1.96	-	39.30	11.75	64.87			
RMS	13.05902G	29.90	68.20	-38.30	43.72	3	Vertical	285	1.96	-	39.30	11.75	64.87			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

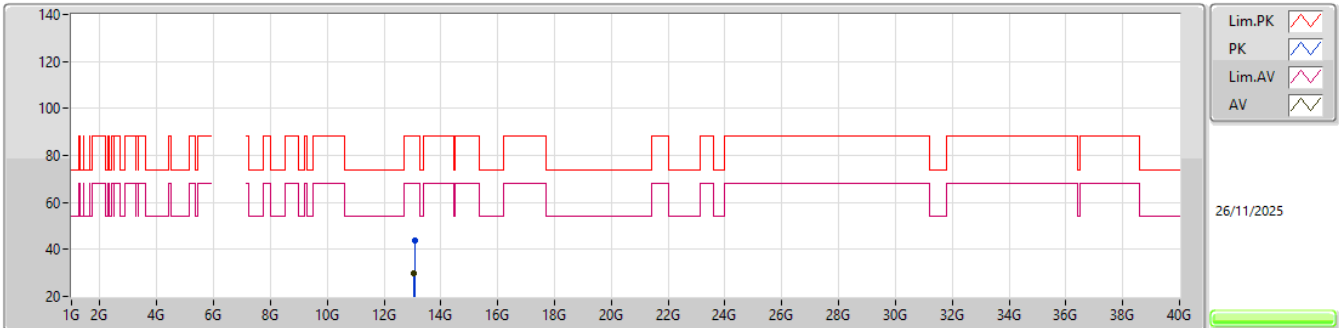


EUT_V_4TX
Setting 41
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.07828G	43.88	88.20	-44.32	57.69	3	Horizontal	54	2.95	-	39.30	11.76	64.87			
RMS	13.05884G	29.90	68.20	-38.30	43.72	3	Horizontal	54	2.95	-	39.30	11.75	64.87			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

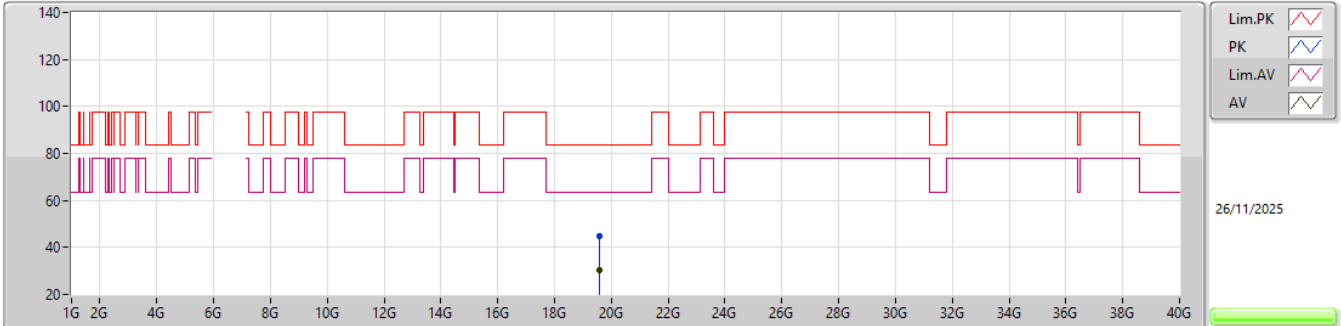


EUT_V_4TX
Setting 41
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60088G	44.57	83.54	-38.97	39.26	1	Vertical	18	2.46	-	37.70	17.14	49.53			
AV	19.60062G	30.59	63.54	-32.95	25.28	1	Vertical	18	2.46	-	37.70	17.14	49.53			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

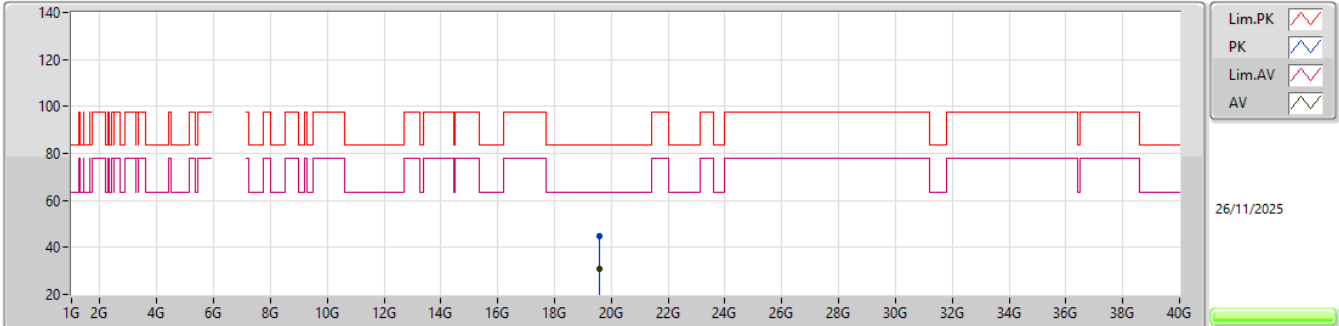


EUT_V_4TX
Setting 41
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60134G	44.79	83.54	-38.75	39.48	1	Horizontal	329	1.16	-	37.70	17.14	49.53			
AV	19.60012G	30.63	63.54	-32.91	25.32	1	Horizontal	329	1.16	-	37.70	17.14	49.53			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

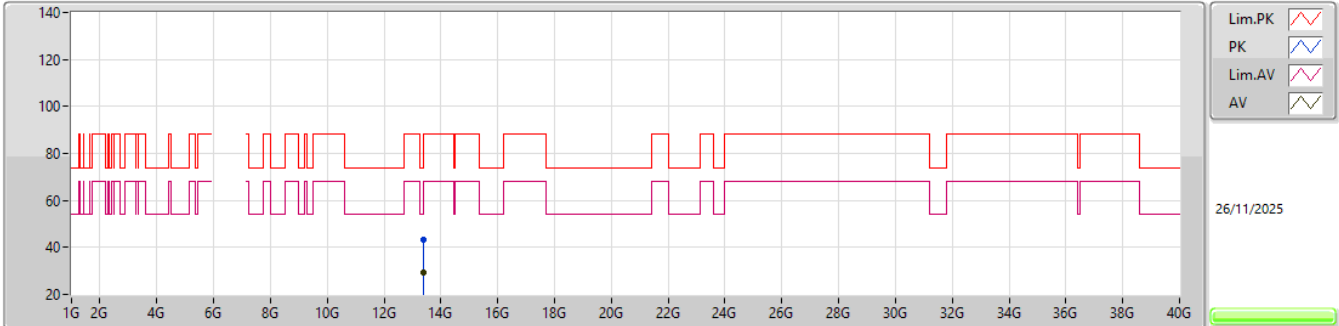


EUT_Y_4TX
Setting 41
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.38028G	43.18	74.00	-30.82	56.01	3	Vertical	332	1.61	-	40.06	11.95	64.84			
AV	13.375G	29.26	54.00	-24.74	42.11	3	Vertical	332	1.61	-	40.05	11.94	64.84			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

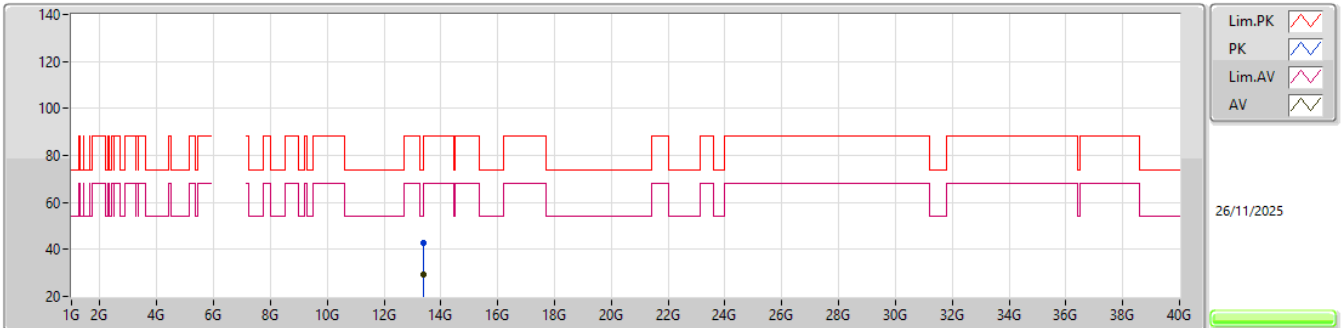


EUT_V_4TX
Setting 41
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.38088G	42.98	74.00	-31.02	55.81	3	Horizontal	118	2.25	-	40.06	11.95	64.84			
AV	13.37506G	29.30	54.00	-24.70	42.15	3	Horizontal	118	2.25	-	40.05	11.94	64.84			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

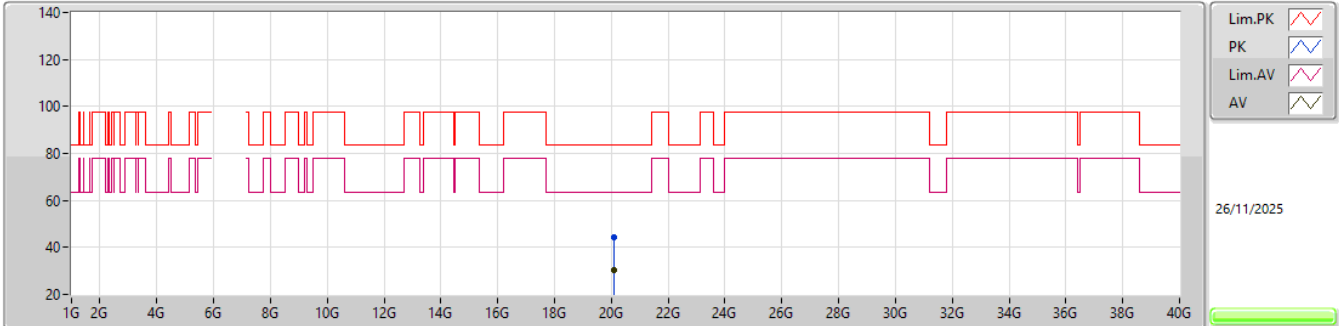


EUT_Y_4TX
Setting 41
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08063G	44.13	83.54	-39.41	38.35	1	Vertical	260	2.19	-	37.66	17.38	49.26			
AV	20.08015G	30.09	63.54	-33.45	24.31	1	Vertical	260	2.19	-	37.66	17.38	49.26			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

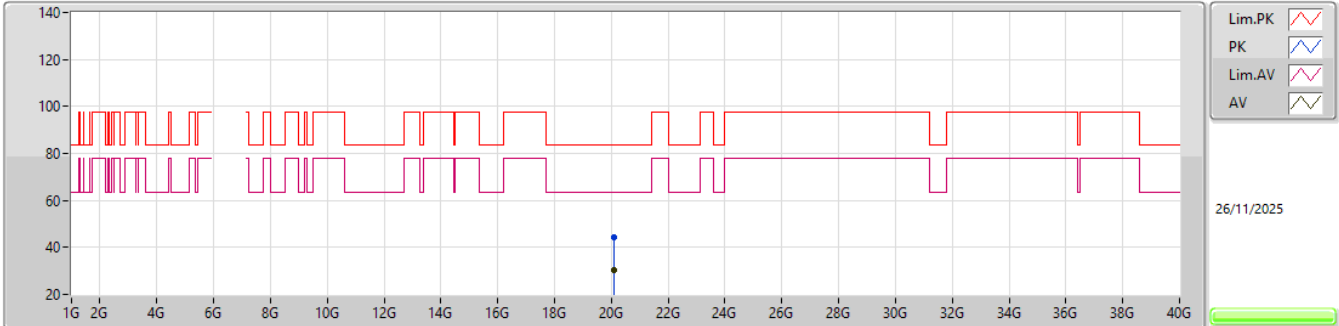


EUT_Y_4TX
Setting 41
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08112G	44.28	83.54	-39.26	38.50	1	Horizontal	312	1.93	-	37.66	17.38	49.26			
AV	20.08065G	30.20	63.54	-33.34	24.42	1	Horizontal	312	1.93	-	37.66	17.38	49.26			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6875MHz_TX

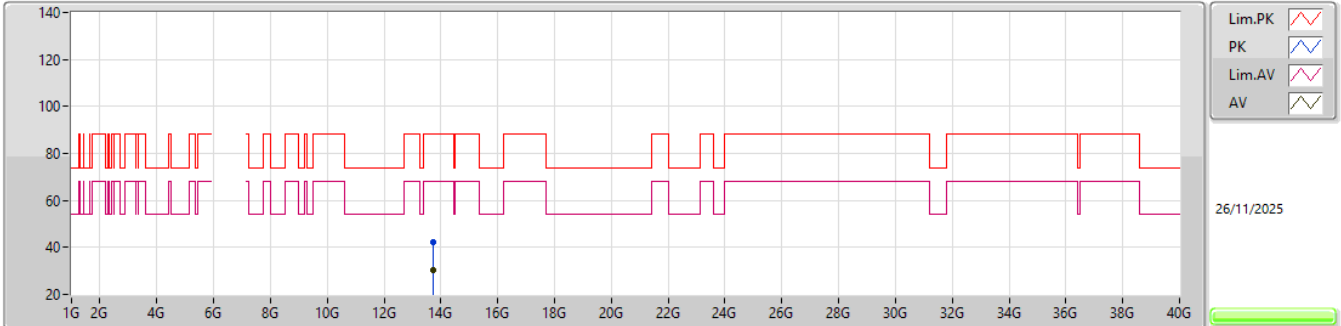


EUT_V_4TX
Setting 40
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74862G	42.32	88.20	-45.88	54.67	3	Vertical	151	1.73	-	40.20	12.17	64.72			
RMS	13.73722G	30.29	68.20	-37.91	42.64	3	Vertical	151	1.73	-	40.20	12.17	64.72			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6875MHz_TX

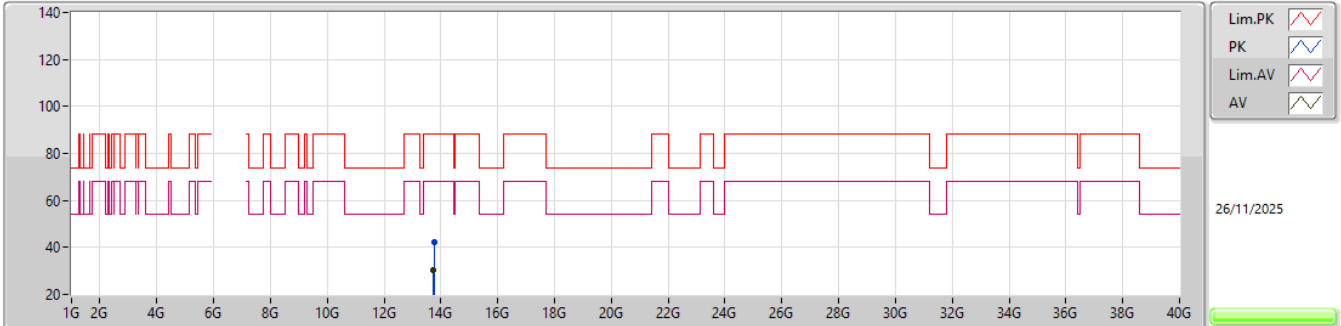


EUT_V_4TX
Setting 40
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.75132G	42.41	88.20	-45.79	54.74	3	Horizontal	176	1.66	-	40.20	12.18	64.71			
RMS	13.73944G	30.27	68.20	-37.93	42.62	3	Horizontal	176	1.66	-	40.20	12.17	64.72			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6875MHz_TX

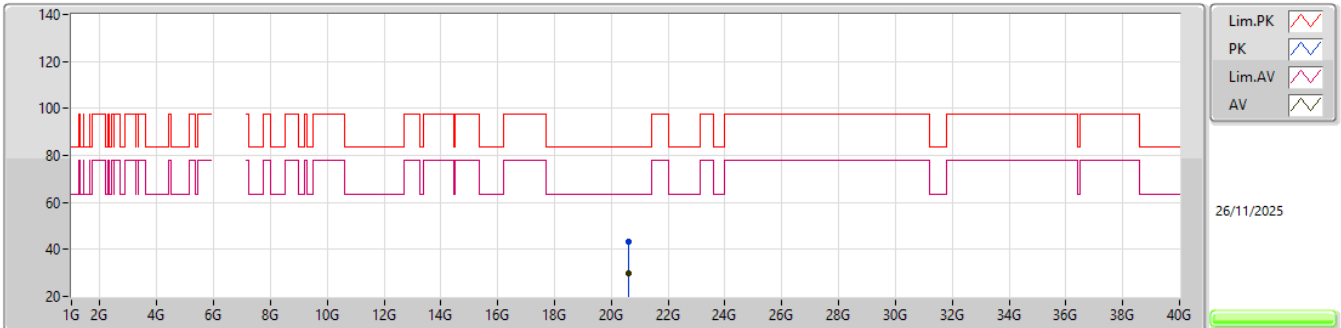


EUT_V_4TX
Setting 40
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.62741G	43.47	83.54	-40.07	37.32	1	Vertical	98	2.21	-	37.85	17.46	49.16			
AV	20.62503G	30.01	63.54	-33.53	23.86	1	Vertical	98	2.21	-	37.85	17.46	49.16			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6875MHz_TX

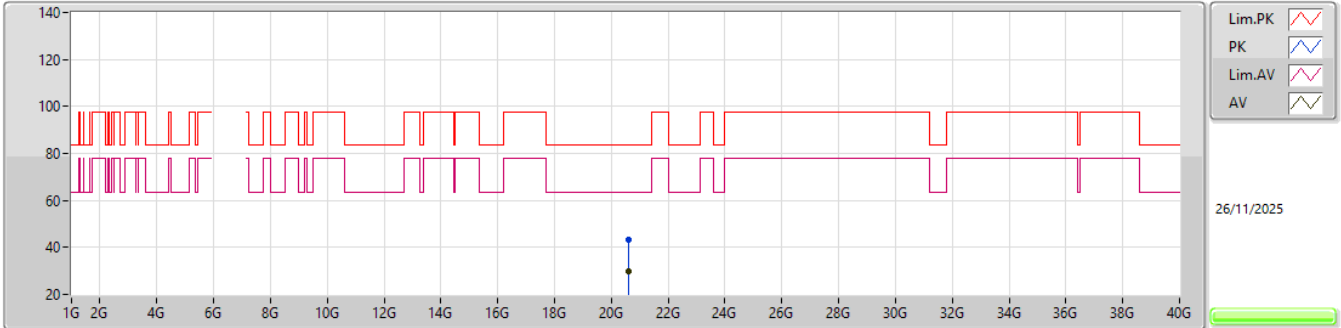


EUT_V_4TX
Setting 40
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.62536G	43.25	83.54	-40.29	37.10	1	Horizontal	151	1.64	-	37.85	17.46	49.16			
AV	20.62039G	30.06	63.54	-33.48	23.93	1	Horizontal	151	1.64	-	37.84	17.46	49.17			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6895MHz_TX

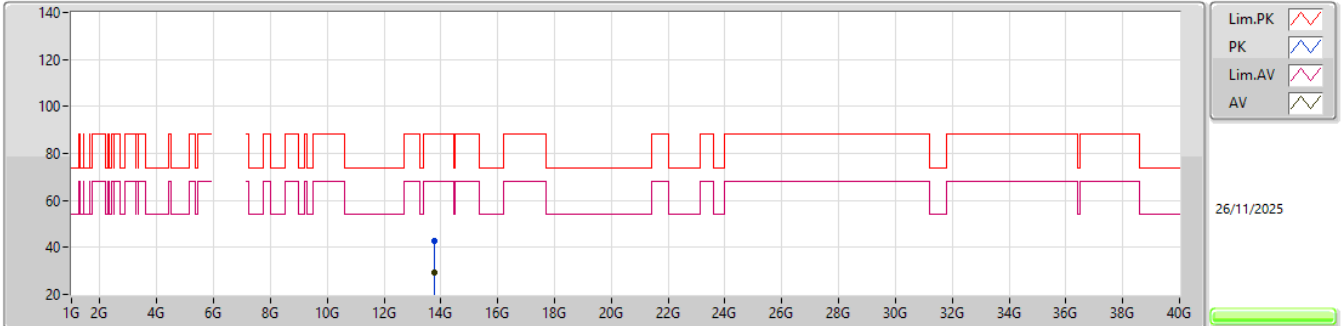


EUT_V_4TX
Setting 46
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.77518G	42.91	88.20	-45.29	55.17	3	Vertical	224	1.83	-	40.25	12.19	64.70			
RMS	13.77854G	29.14	68.20	-39.06	41.39	3	Vertical	224	1.83	-	40.26	12.19	64.70			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6895MHz_TX

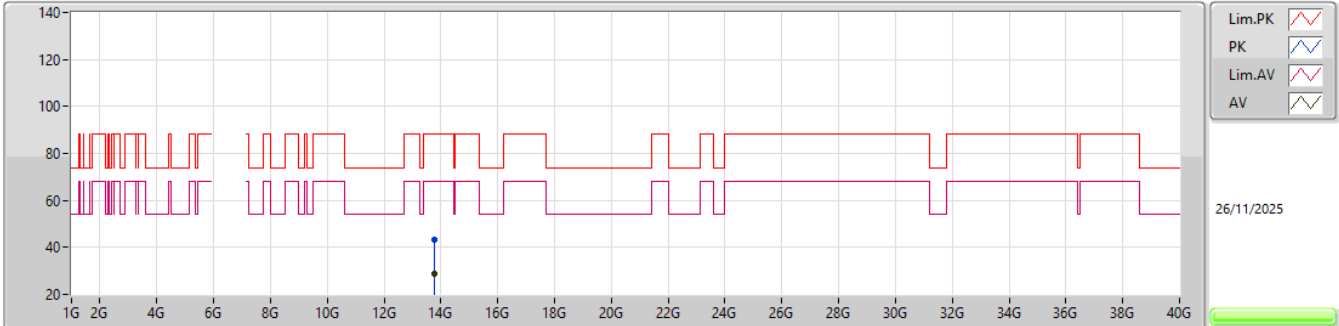


EUT_V_4TX
Setting 46
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.78112G	43.04	88.20	-45.16	55.29	3	Horizontal	91	1.72	-	40.26	12.19	64.70			
RMS	13.77596G	29.05	68.20	-39.15	41.31	3	Horizontal	91	1.72	-	40.25	12.19	64.70			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6895MHz_TX

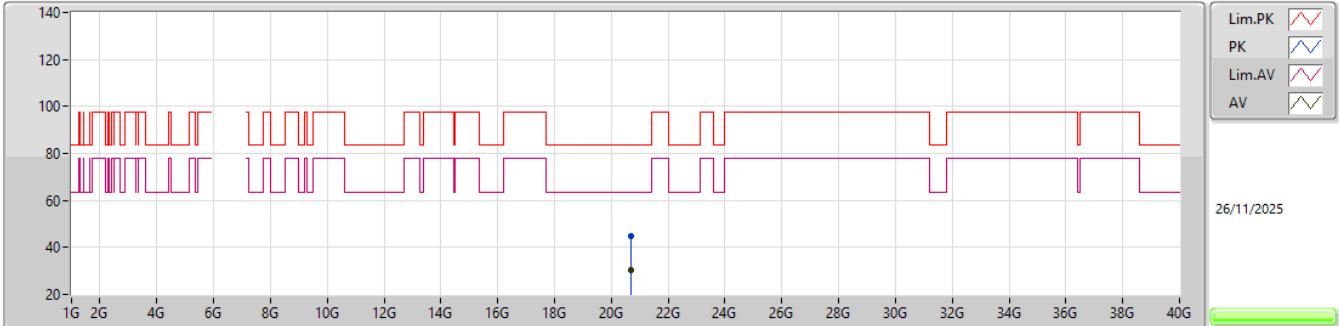


EUT_V_4TX
Setting 46
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.68099G	44.66	83.54	-38.88	38.55	1	Vertical	79	1.36	-	37.78	17.47	49.14			
AV	20.68016G	30.13	63.54	-33.41	24.02	1	Vertical	79	1.36	-	37.78	17.47	49.14			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6895MHz_TX

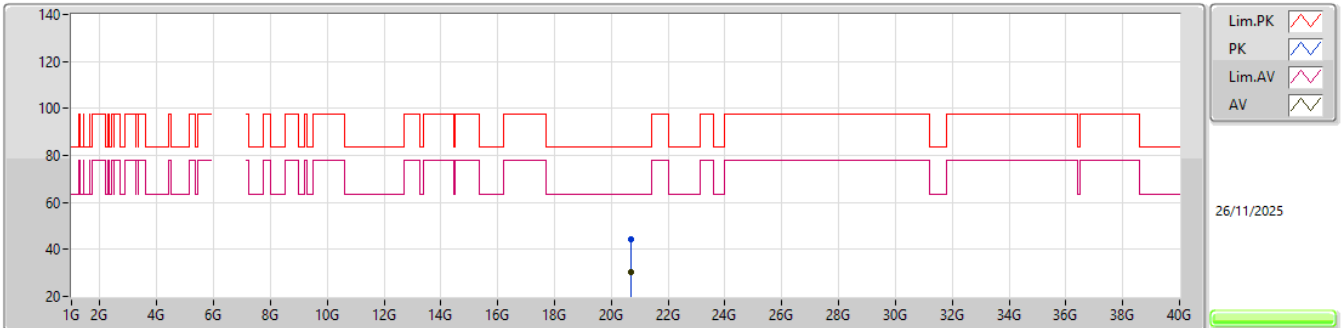


EUT_Y_4TX
Setting 46
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.68028G	44.09	83.54	-39.45	37.98	1	Horizontal	245	2.65	-	37.78	17.47	49.14			
AV	20.68866G	30.09	63.54	-33.45	24.00	1	Horizontal	245	2.65	-	37.75	17.47	49.13			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6995MHz_TX

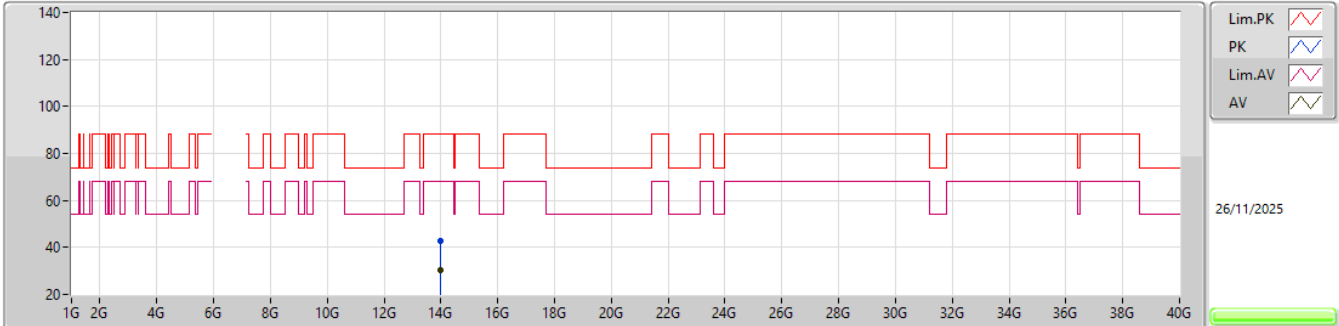


EUT_V_4TX
Setting 48
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.98892G	42.87	88.20	-45.33	54.68	3	Vertical	160	2.75	-	40.48	12.32	64.61			
RMS	13.97548G	30.48	68.20	-37.72	42.33	3	Vertical	160	2.75	-	40.45	12.31	64.61			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6995MHz_TX

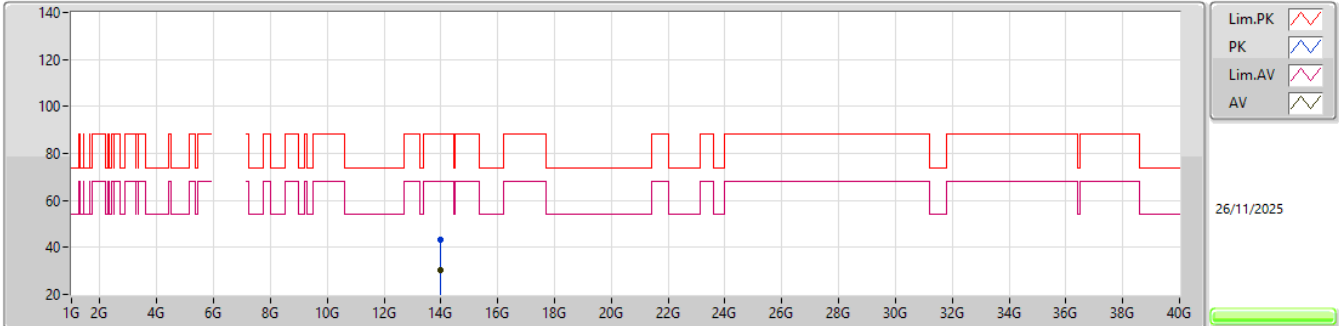


EUT_V_4TX
Setting 48
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.98142G	43.36	88.20	-44.84	55.19	3	Horizontal	11	2.99	-	40.46	12.32	64.61			
RMS	13.97506G	30.45	68.20	-37.75	42.30	3	Horizontal	11	2.99	-	40.45	12.31	64.61			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


6995MHz_TX

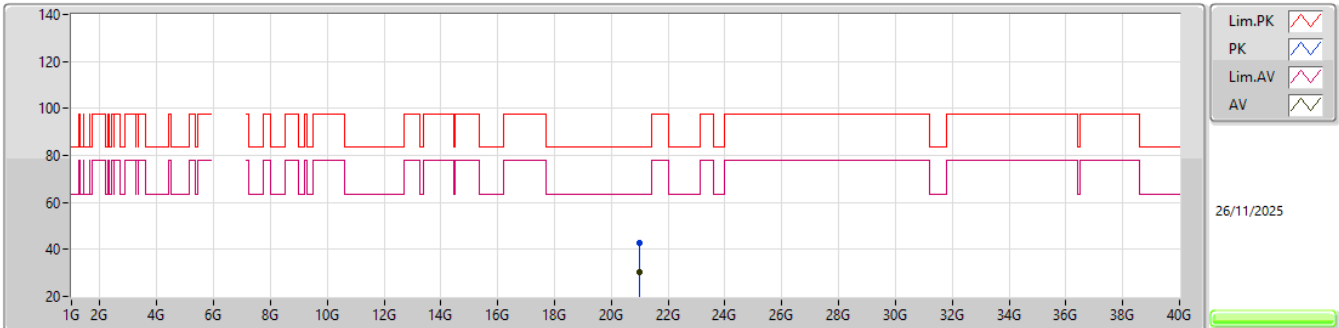EUT_Y_4TX
Setting 48
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.98662G	42.98	83.54	-40.56	36.48	1	Vertical	208	2.79	-	37.97	17.51	48.98			
AV	20.98023G	30.49	63.54	-33.05	24.00	1	Vertical	208	2.79	-	37.96	17.51	48.98			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6995MHz_TX

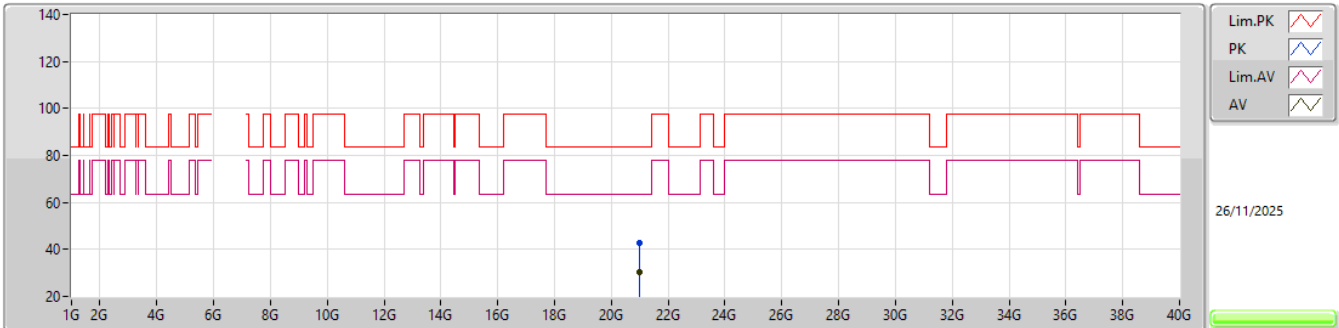


EUT_Y_4TX
Setting 48
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.98821G	42.69	83.54	-40.85	36.18	1	Horizontal	269	2.62	-	37.98	17.51	48.98			
AV	20.98G	30.40	63.54	-33.14	23.91	1	Horizontal	269	2.62	-	37.96	17.51	48.98			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

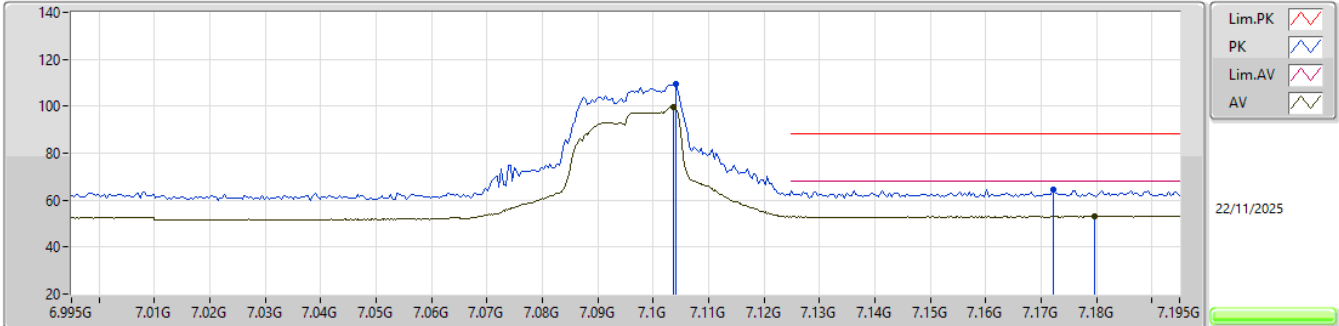


EUT_Y_4TX
Setting 41
06-U-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1042G	109.64	Inf	-Inf	98.63	3	Vertical	62	1.93	-	36.02	8.44	33.45			
RMS	7.1036G	99.86	Inf	-Inf	88.86	3	Vertical	62	1.93	-	36.01	8.44	33.45			
PK	7.1722G	64.56	88.20	-23.64	53.35	3	Vertical	62	1.93	-	36.24	8.45	33.48			
RMS	7.1796G	53.28	68.20	-14.92	42.05	3	Vertical	62	1.93	-	36.26	8.45	33.48			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

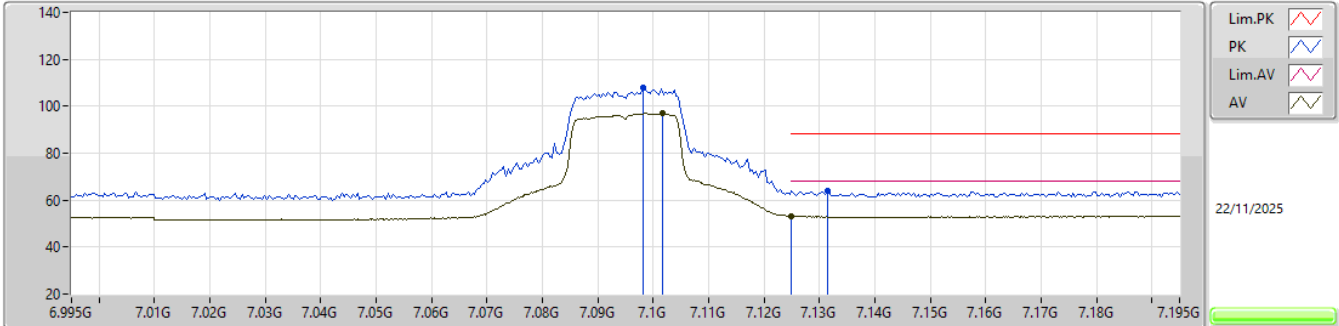


EUT_Y_4TX
Setting 41
06-U-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	7.0982G	107.90	Inf	-Inf	96.92	3	Horizontal	333	1.75	-	35.99	8.43	33.44				
RMS	7.1016G	96.92	Inf	-Inf	85.91	3	Horizontal	333	1.75	-	36.01	8.44	33.44				
PK	7.1314G	64.22	88.20	-23.98	53.11	3	Horizontal	333	1.75	-	36.13	8.44	33.46				
RMS	7.125G	53.25	68.20	-14.95	42.16	3	Horizontal	333	1.75	-	36.10	8.44	33.45				

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

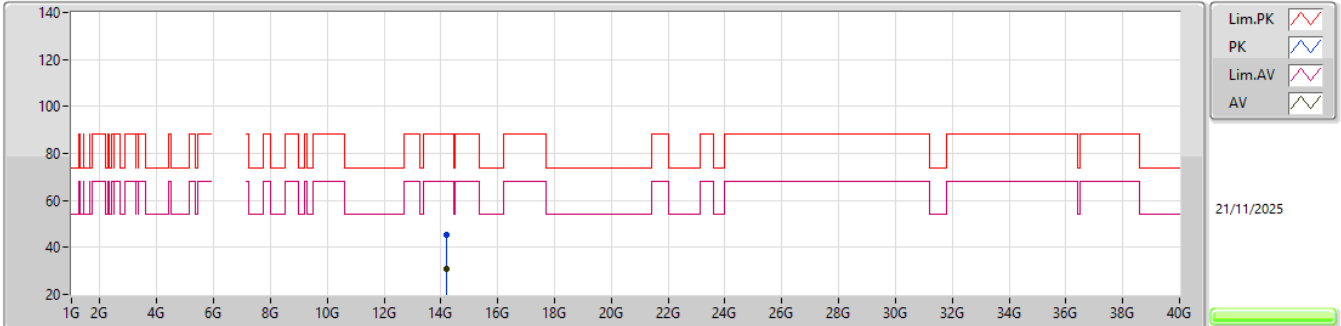


EUT_V_4TX
Setting 41
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.19204G	45.17	88.20	-43.03	56.57	3	Vertical	247	1.09	-	40.60	12.48	64.48			
RMS	14.18514G	31.06	68.20	-37.14	42.47	3	Vertical	247	1.09	-	40.60	12.48	64.49			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

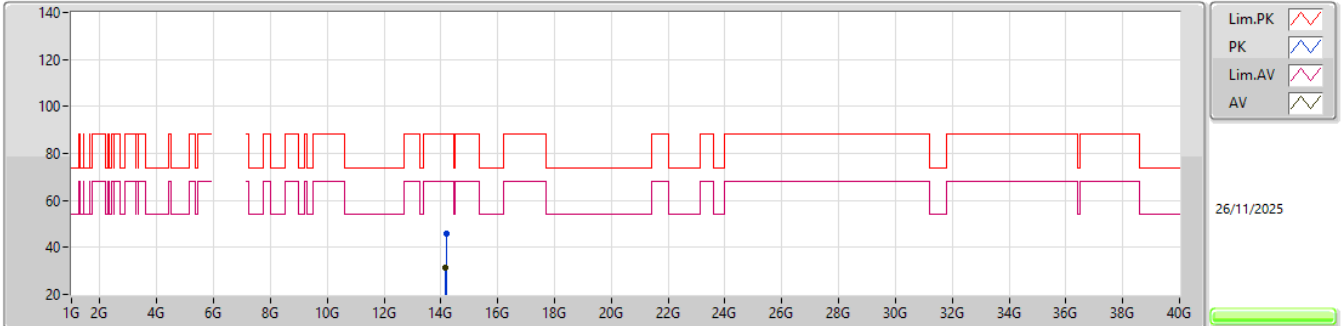


EUT_Y_4TX
Setting 41
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.19762G	45.65	88.20	-42.55	57.04	3	Horizontal	358	2.72	-	40.60	12.49	64.48			
RMS	14.1756G	31.13	68.20	-37.07	42.55	3	Horizontal	358	2.72	-	40.60	12.47	64.49			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

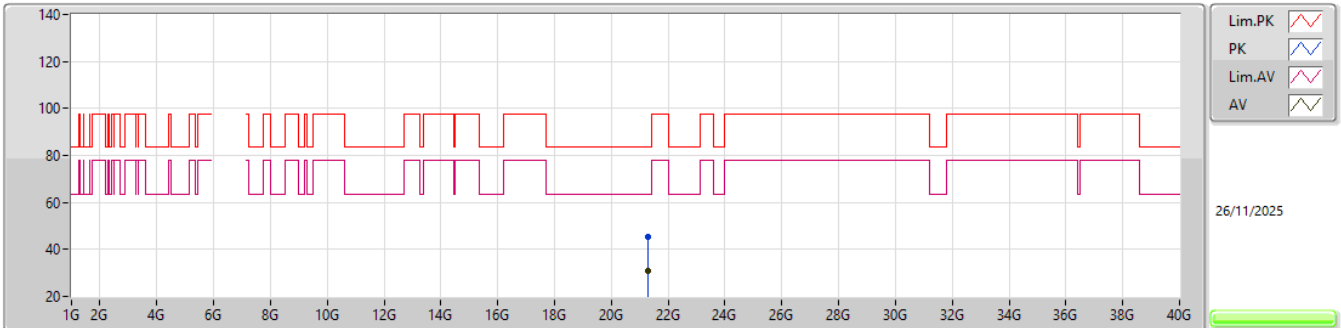


EUT_Y_4TX
Setting 41
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.28952G	45.20	83.54	-38.34	38.45	1	Vertical	40	1.90	-	37.98	17.61	48.84			
AV	21.2891G	30.65	63.54	-32.89	23.90	1	Vertical	40	1.90	-	37.98	17.61	48.84			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


7095MHz_TX

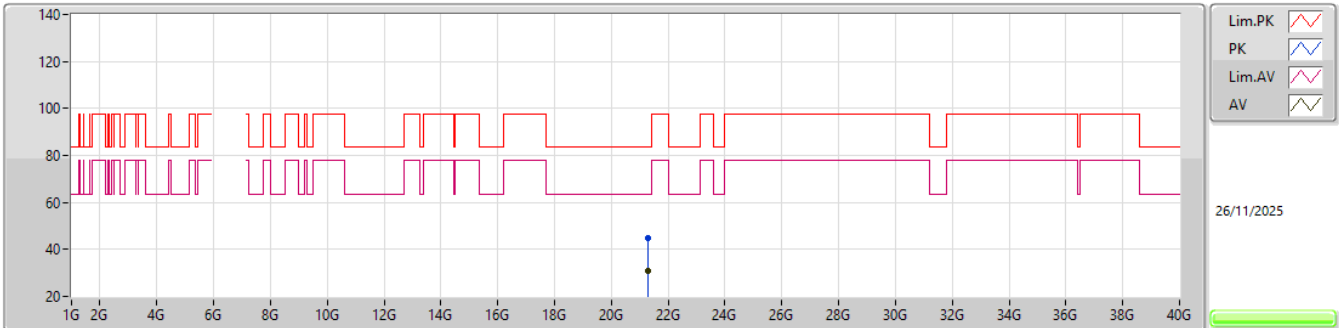EUT_Y_4TX
Setting 41
06-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.28672G	44.67	83.54	-38.87	37.93	1	Horizontal	307	1.62	-	37.97	17.61	48.84			
AV	21.28248G	30.70	63.54	-32.84	23.98	1	Horizontal	307	1.62	-	37.96	17.61	48.85			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

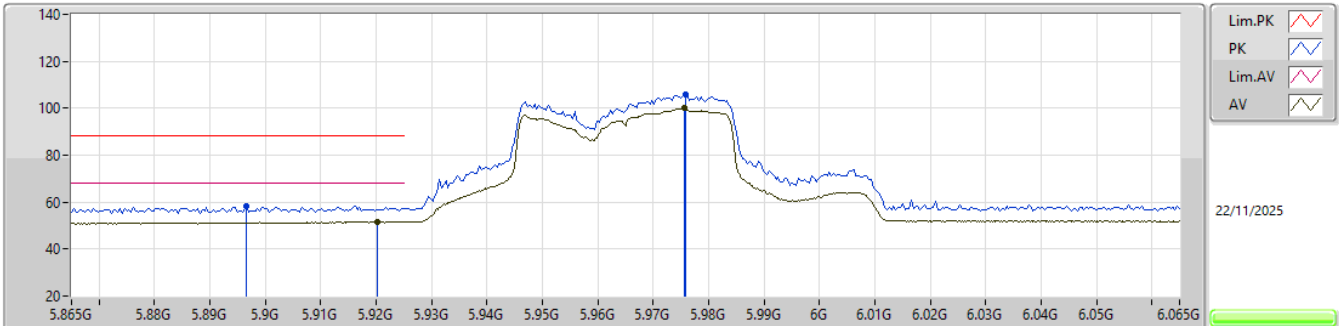


EUT_Y_4TX
Setting 42
06-U-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8966G	58.38	88.20	-29.82	52.43	3	Vertical	281	1.00	-	32.19	7.52	33.76			
RMS	5.9202G	51.61	68.20	-16.59	45.56	3	Vertical	281	1.00	-	32.24	7.57	33.76			
PK	5.9758G	105.84	Inf	-Inf	99.57	3	Vertical	281	1.00	-	32.35	7.67	33.75			
RMS	5.9756G	99.95	Inf	-Inf	93.68	3	Vertical	281	1.00	-	32.35	7.67	33.75			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

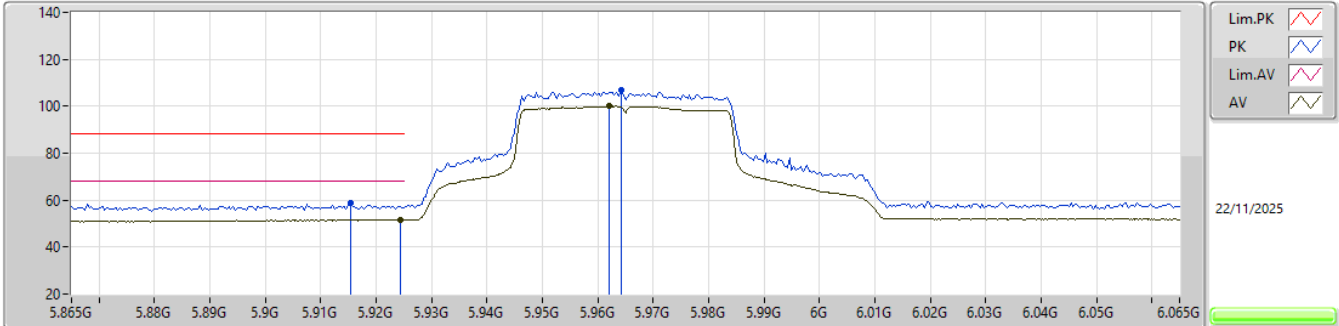


EUT_Y_4TX
Setting 42
06-U-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9154G	58.54	88.20	-29.66	52.51	3	Horizontal	280	1.90	-	32.23	7.56	33.76			
RMS	5.9244G	51.76	68.20	-16.44	45.70	3	Horizontal	280	1.90	-	32.25	7.57	33.76			
PK	5.9642G	106.74	Inf	-Inf	100.51	3	Horizontal	280	1.90	-	32.33	7.65	33.75			
RMS	5.962G	100.01	Inf	-Inf	93.80	3	Horizontal	280	1.90	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

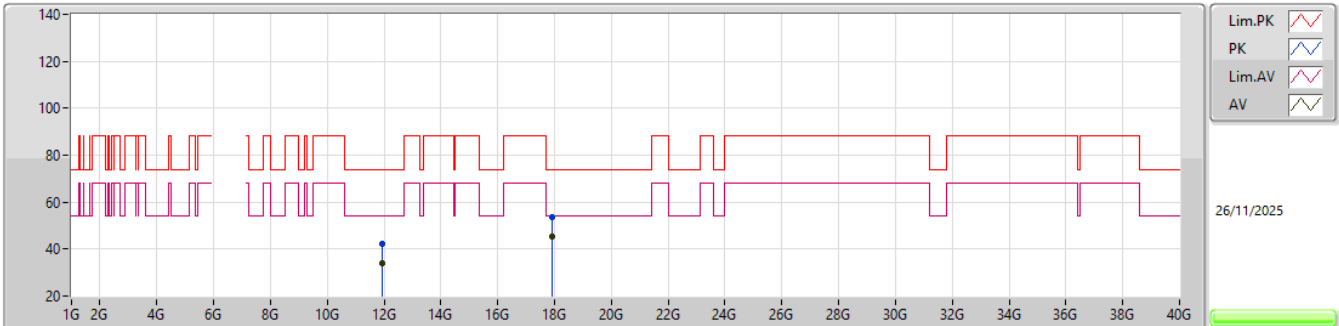


EUT_Y_4TX
Setting 42
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.93564G	42.30	74.00	-31.70	58.24	3	Vertical	141	2.71	-	38.80	11.07	65.81			
AV	11.93456G	33.99	54.00	-20.01	49.93	3	Vertical	141	2.71	-	38.80	11.07	65.81			
PK	17.90148G	53.64	74.00	-20.36	54.12	3	Vertical	235	1.47	-	48.77	14.75	64.00			
AV	17.89608G	45.13	54.00	-8.87	45.83	3	Vertical	235	1.47	-	48.55	14.75	64.00			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

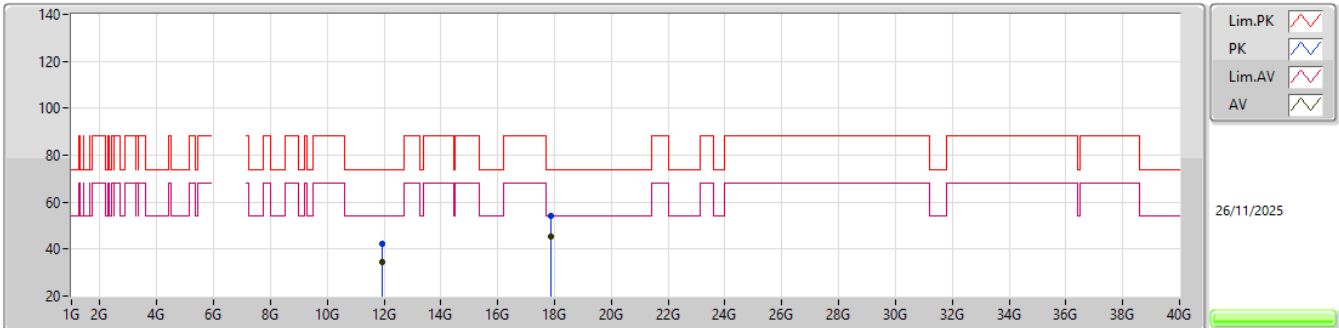


EUT_Y_4TX
Setting 42
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.93306G	42.21	74.00	-31.79	58.15	3	Horizontal	217	1.43	-	38.80	11.07	65.81				
AV	11.92376G	34.51	54.00	-19.49	50.46	3	Horizontal	217	1.43	-	38.80	11.07	65.82				
PK	17.89338G	53.90	74.00	-20.10	54.71	3	Horizontal	246	2.76	-	48.45	14.74	64.00				
AV	17.88354G	45.32	54.00	-8.68	46.52	3	Horizontal	246	2.76	-	48.07	14.74	64.01				

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5965MHz_TX

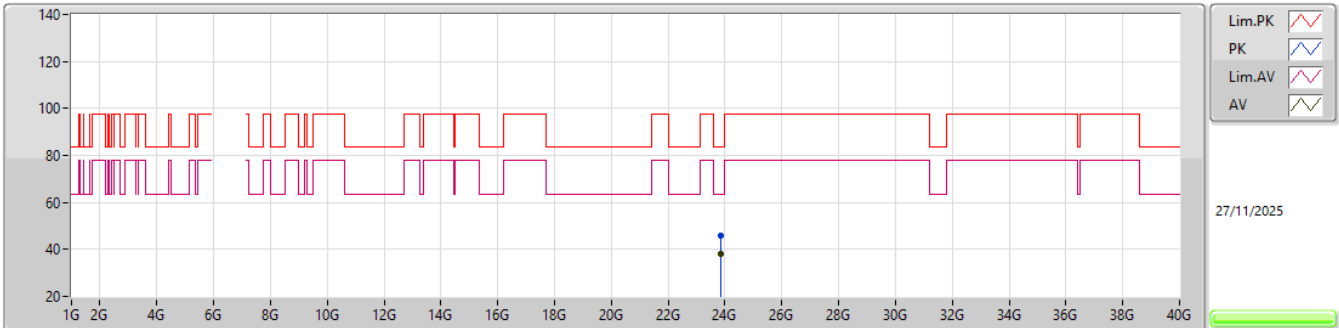EUT_Y_4TX
Setting 42
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85262G	45.65	83.54	-37.89	35.41	1	Vertical	259	1.17	-	38.61	18.76	47.13			
AV	23.8522G	38.15	63.54	-25.39	27.92	1	Vertical	259	1.17	-	38.60	18.76	47.13			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

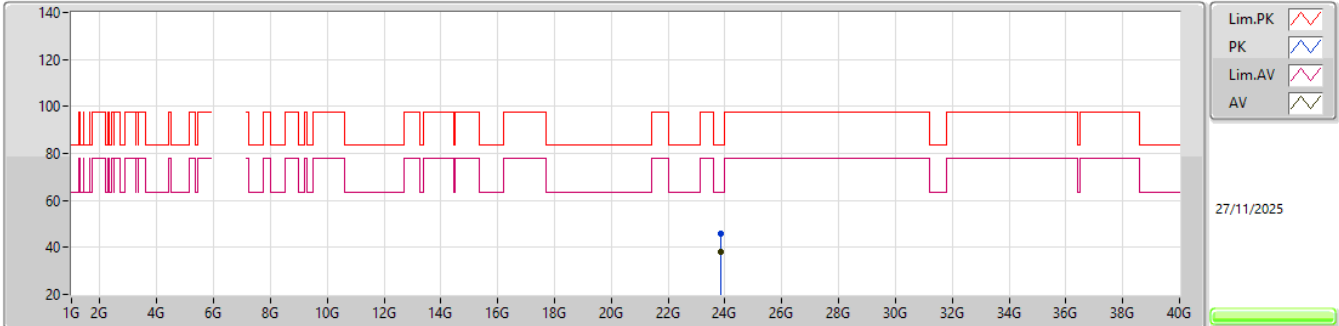


EUT_Y_4TX
Setting 42
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85067G	45.90	83.54	-37.64	35.67	1	Horizontal	107	2.44	-	38.60	18.76	47.13			
AV	23.8459G	38.16	63.54	-25.38	27.91	1	Horizontal	107	2.44	-	38.62	18.76	47.13			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

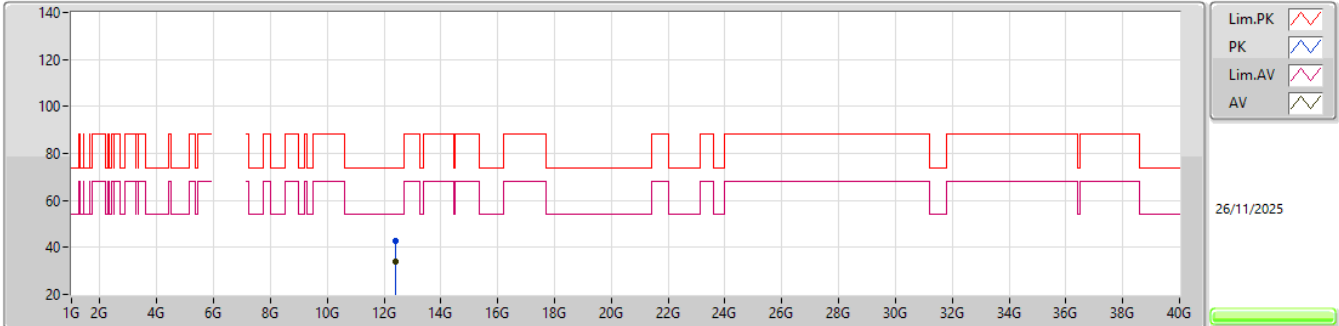


EUT_V_4TX
Setting 34
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41282G	42.63	74.00	-31.37	58.21	3	Vertical	233	2.79	-	38.67	11.35	65.60			
AV	12.40286G	34.06	54.00	-19.94	49.63	3	Vertical	233	2.79	-	38.69	11.34	65.60			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

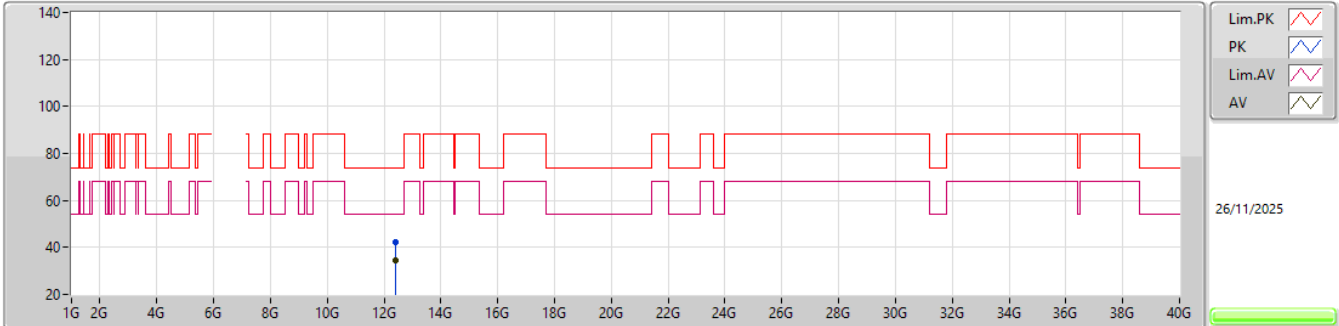


EUT_V_4TX
Setting 34
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41312G	42.48	74.00	-31.52	58.06	3	Horizontal	209	1.51	-	38.67	11.35	65.60			
AV	12.41144G	34.48	54.00	-19.52	50.05	3	Horizontal	209	1.51	-	38.68	11.35	65.60			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

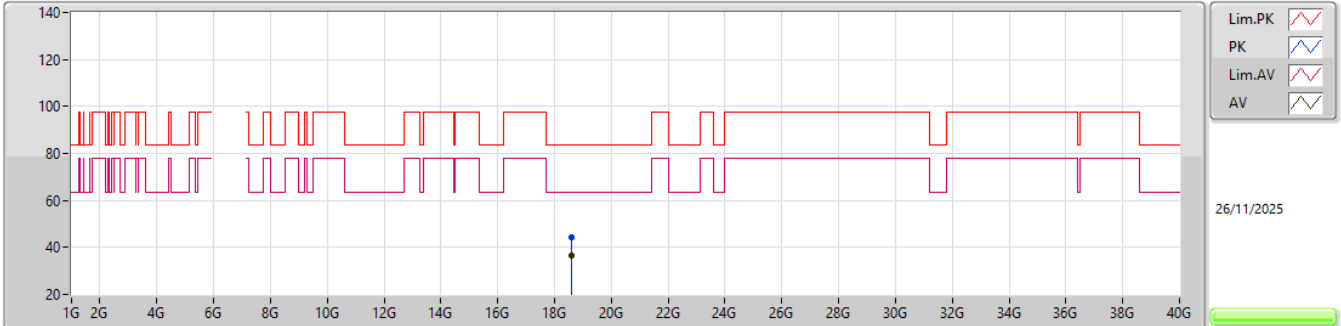


EUT Y_4TX
Setting 34
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61576G	44.34	83.54	-39.20	39.68	1	Vertical	55	2.99	-	37.70	16.59	49.63			
AV	18.61622G	36.30	63.54	-27.24	31.63	1	Vertical	55	2.99	-	37.70	16.59	49.62			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

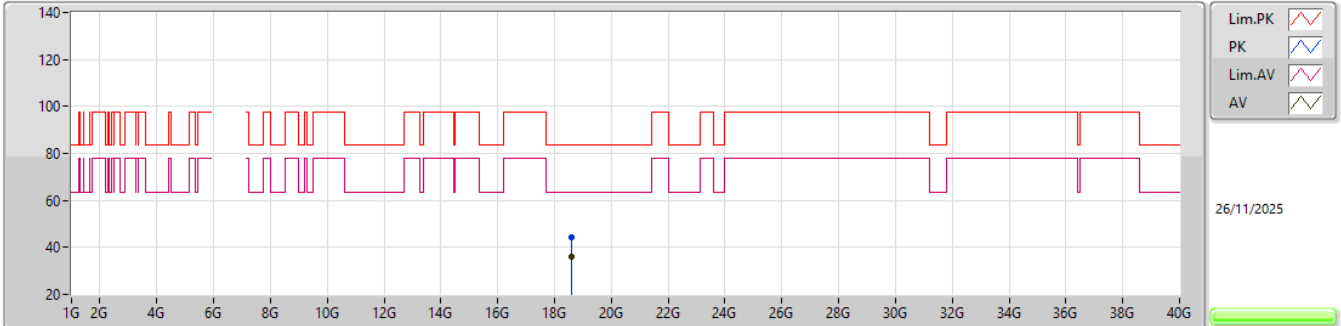


EUT_Y_4TX
Setting 34
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61667G	44.46	83.54	-39.08	39.79	1	Horizontal	337	2.16	-	37.70	16.59	49.62			
AV	18.6164G	35.80	63.54	-27.74	31.13	1	Horizontal	337	2.16	-	37.70	16.59	49.62			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

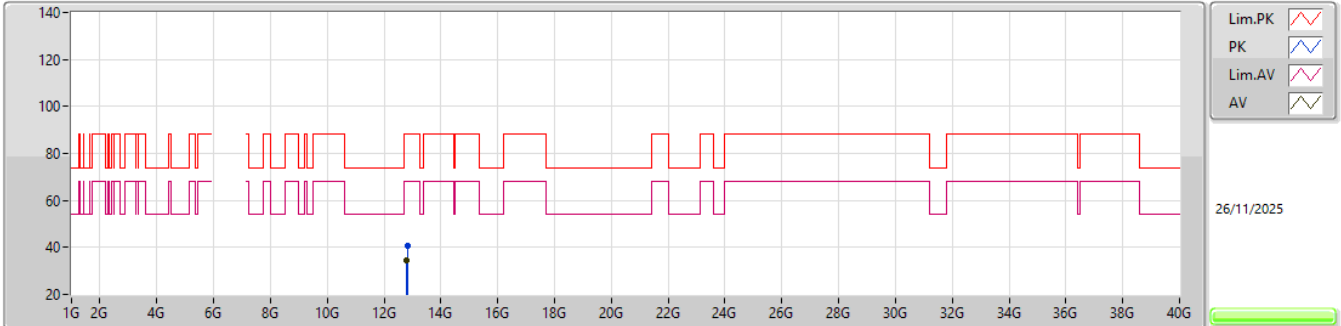


EUT_V_4TX
Setting 36
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81522G	40.77	88.20	-47.43	54.87	3	Vertical	358	1.77	-	39.43	11.60	65.13			
RMS	12.80328G	34.69	68.20	-33.51	48.84	3	Vertical	358	1.77	-	39.41	11.59	65.15			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

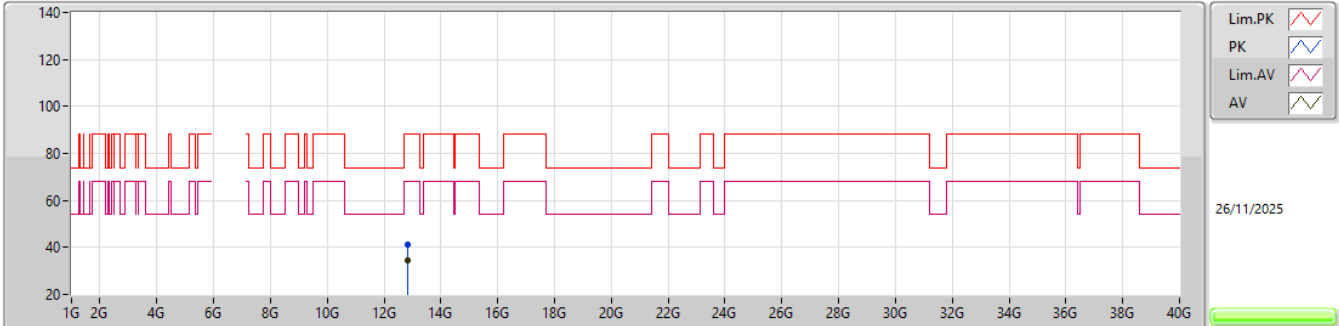


EUT_Y_4TX
Setting 36
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81582G	41.34	88.20	-46.86	55.44	3	Horizontal	294	1.46	-	39.43	11.60	65.13			
RMS	12.81336G	34.59	68.20	-33.61	48.71	3	Horizontal	294	1.46	-	39.43	11.59	65.14			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

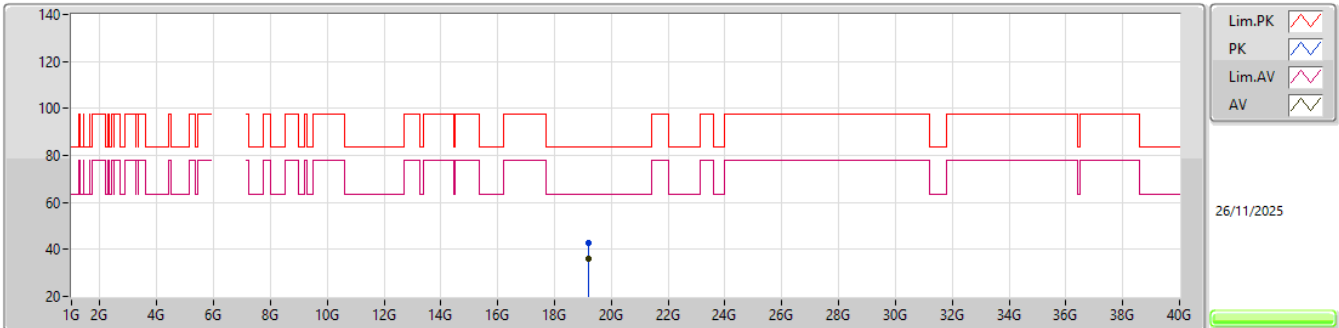


EUT_Y_4TX
Setting 36
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21295G	42.80	83.54	-40.74	37.57	1	Vertical	68	1.87	-	37.75	16.91	49.43			
AV	19.21703G	35.79	63.54	-27.75	30.54	1	Vertical	68	1.87	-	37.77	16.92	49.44			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

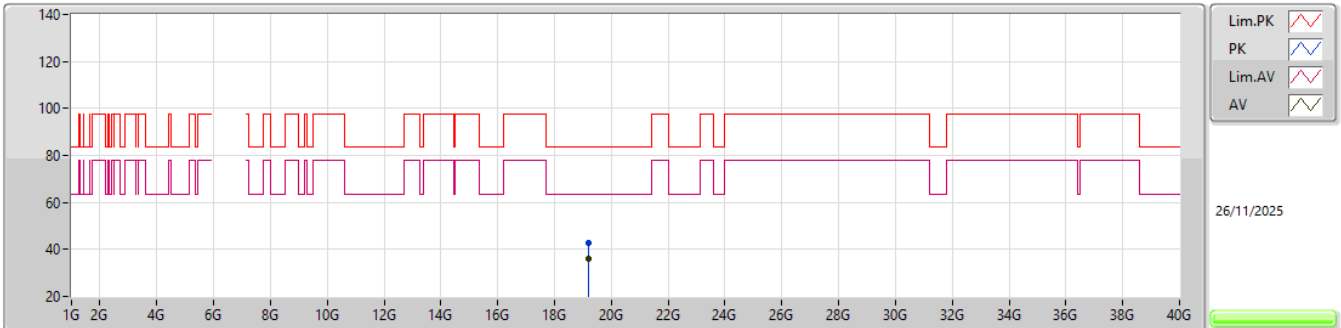


EUT_Y_4TX
Setting 36
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21612G	42.62	83.54	-40.92	37.38	1	Horizontal	146	2.64	-	37.76	16.92	49.44			
AV	19.21546G	35.94	63.54	-27.60	30.70	1	Horizontal	146	2.64	-	37.76	16.91	49.43			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6445MHz_TX

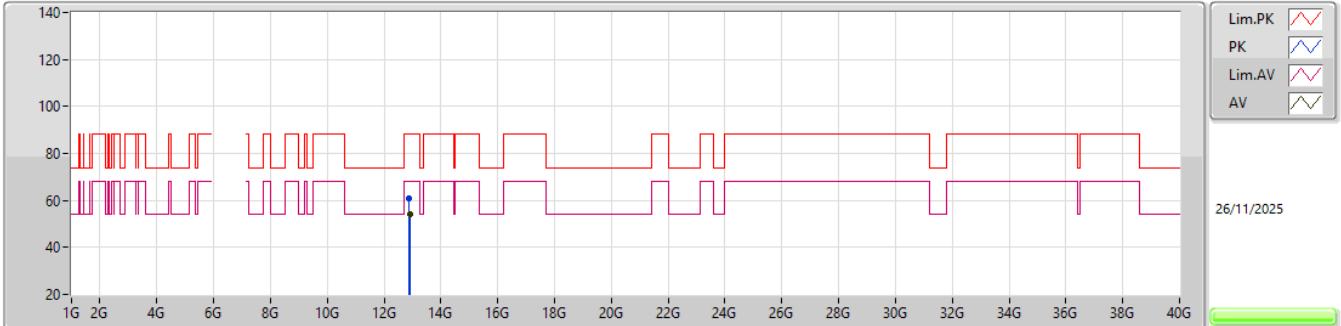


EUT_V_4TX
Setting 36
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.89126G	60.98	88.20	-27.22	55.74	3	Vertical	107	2.10	-	39.42	11.64	45.82			
RMS	12.8981G	53.91	68.20	-14.29	48.69	3	Vertical	107	2.10	-	39.40	11.65	45.83			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6445MHz_TX

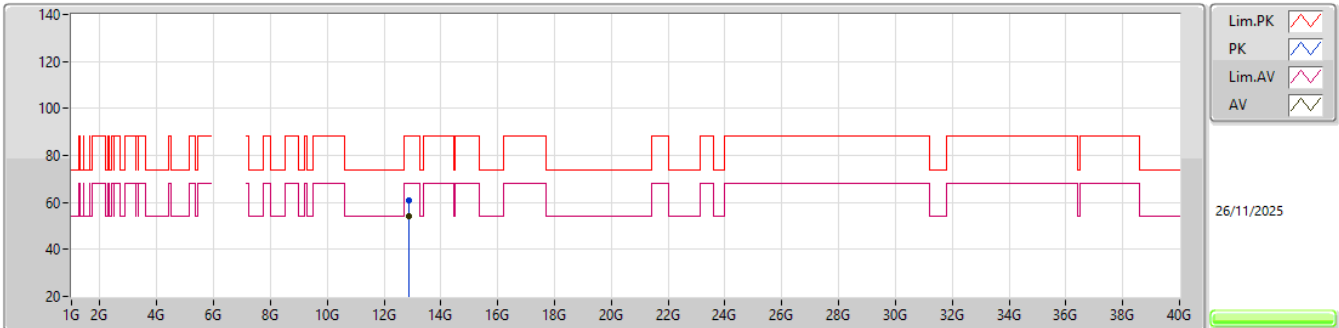


EUT_V_4TX
Setting 36
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.89G	60.77	88.20	-27.43	55.53	3	Horizontal	79	1.71	-	39.42	11.64	45.82			
RMS	12.88946G	53.98	68.20	-14.22	48.74	3	Horizontal	79	1.71	-	39.42	11.64	45.82			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6445MHz_TX

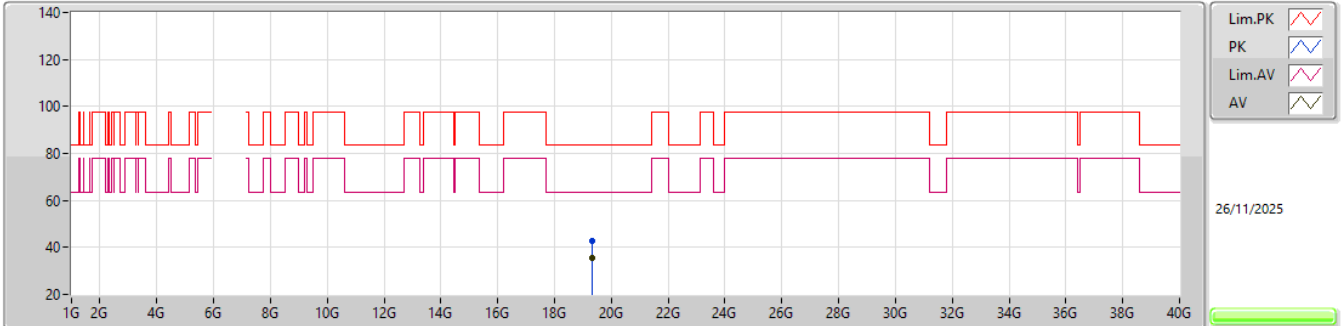


EUT_Y_4TX
Setting 36
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.3333G	42.78	83.54	-40.76	37.53	1	Vertical	77	1.00	-	37.77	16.98	49.50			
AV	19.33728G	35.65	63.54	-27.89	30.40	1	Vertical	77	1.00	-	37.77	16.99	49.51			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


6445MHz_TX

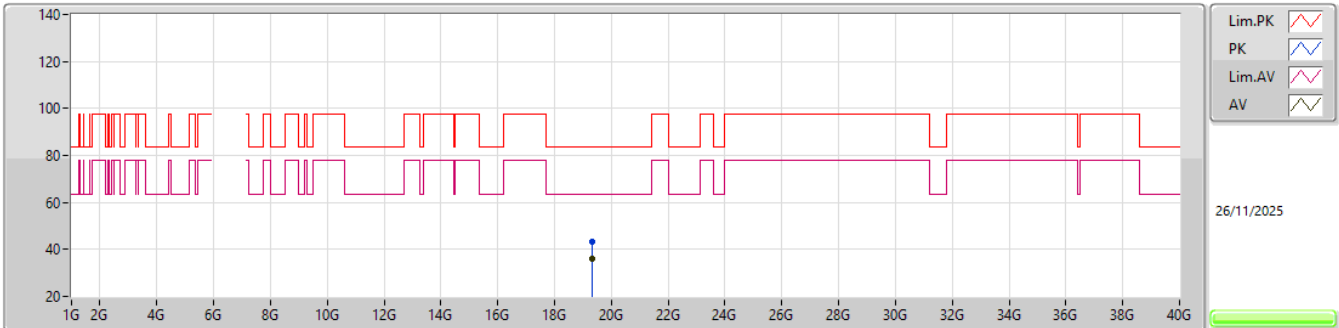EUT_Y_4TX
Setting 36
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.33737G	43.48	83.54	-40.06	38.23	1	Horizontal	74	2.50	-	37.77	16.99	49.51			
AV	19.33951G	36.03	63.54	-27.51	30.77	1	Horizontal	74	2.50	-	37.78	16.99	49.51			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6485MHz_TX

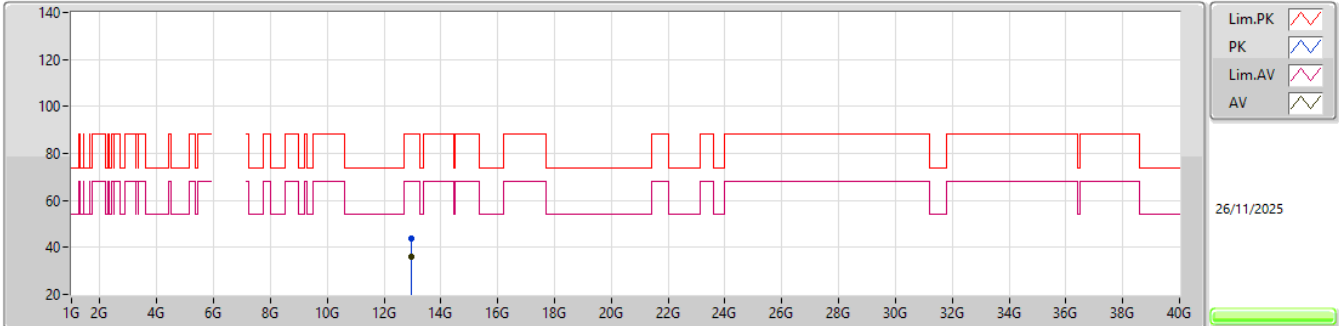


EUT_Y_4TX
Setting 30
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9706G	44.01	88.20	-44.19	57.74	3	Vertical	228	2.22	-	39.50	11.69	64.92			
RMS	12.95914G	35.81	68.20	-32.39	49.57	3	Vertical	228	2.22	-	39.50	11.68	64.94			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6485MHz_TX

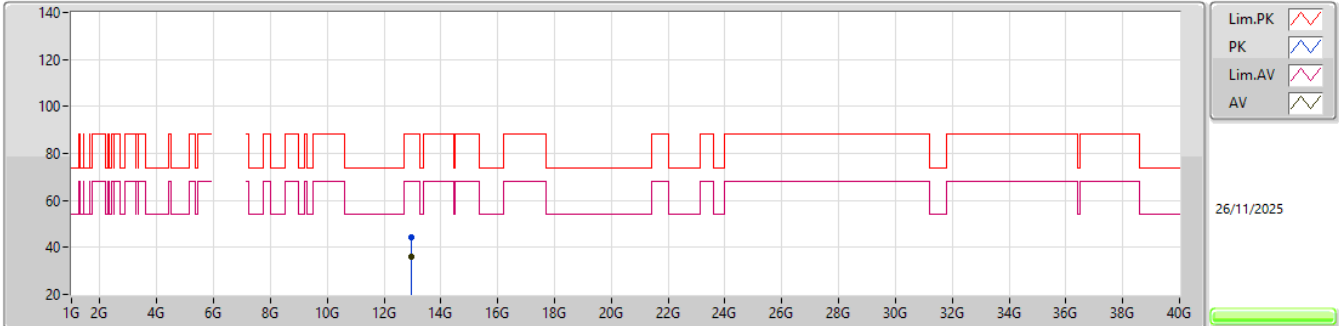


EUT_Y_4TX
Setting 30
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9724G	44.12	88.20	-44.08	57.85	3	Horizontal	250	2.99	-	39.50	11.69	64.92			
RMS	12.9607G	35.82	68.20	-32.38	49.56	3	Horizontal	250	2.99	-	39.50	11.69	64.93			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6485MHz_TX

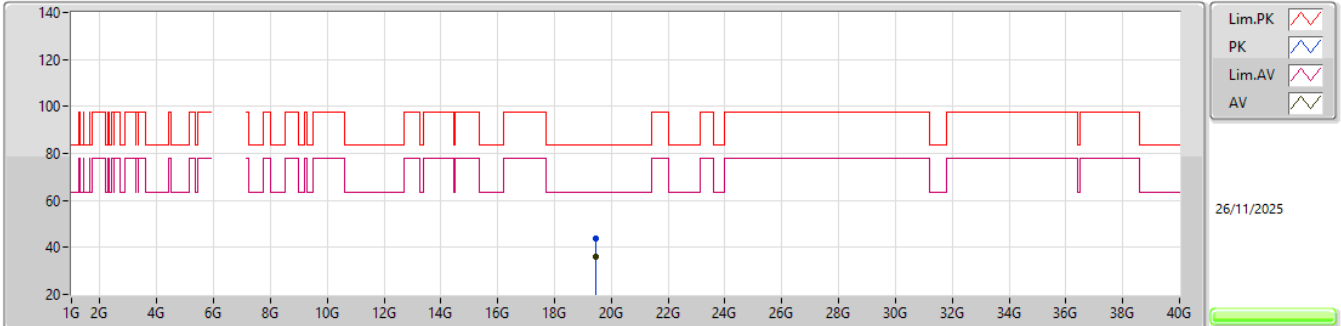


EUT_Y_4TX
Setting 30
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45968G	43.67	83.54	-39.87	38.49	1	Vertical	175	1.90	-	37.70	17.06	49.58			
AV	19.45155G	36.22	63.54	-27.32	31.04	1	Vertical	175	1.90	-	37.70	17.05	49.57			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6485MHz_TX

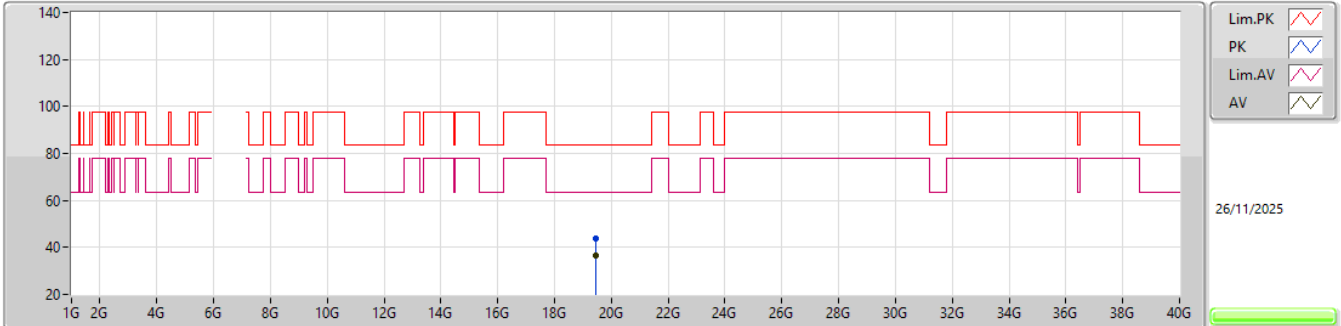


EUT_Y_4TX
Setting 30
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45846G	43.73	83.54	-39.81	38.55	1	Horizontal	110	2.48	-	37.70	17.06	49.58			
AV	19.45316G	36.65	63.54	-26.89	31.47	1	Horizontal	110	2.48	-	37.70	17.05	49.57			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6525MHz_TX

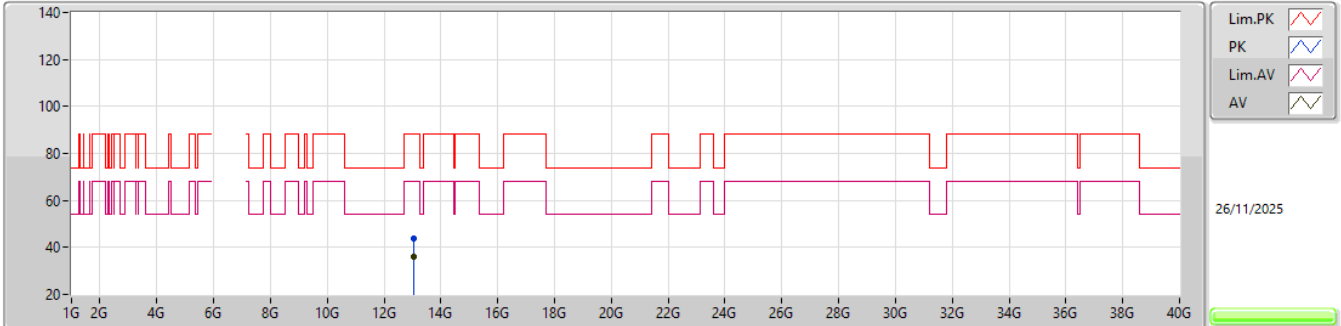


EUT_V_4TX
Setting 33
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.04742G	43.98	88.20	-44.22	57.81	3	Vertical	24	1.40	-	39.31	11.74	64.88			
RMS	13.03992G	35.82	68.20	-32.38	49.63	3	Vertical	24	1.40	-	39.34	11.73	64.88			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6525MHz_TX

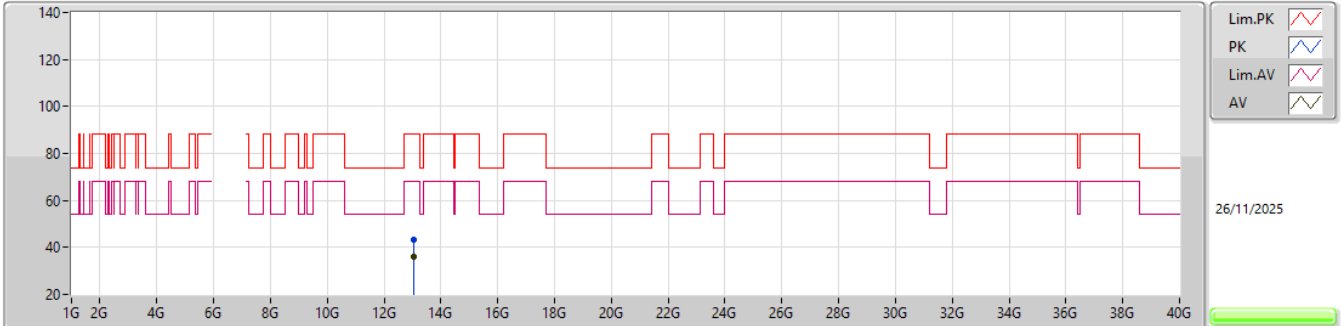


EUT_V_4TX
Setting 33
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05816G	43.47	88.20	-44.73	57.29	3	Horizontal	302	2.05	-	39.30	11.75	64.87			
RMS	13.0536G	35.87	68.20	-32.33	49.70	3	Horizontal	302	2.05	-	39.30	11.74	64.87			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6525MHz_TX

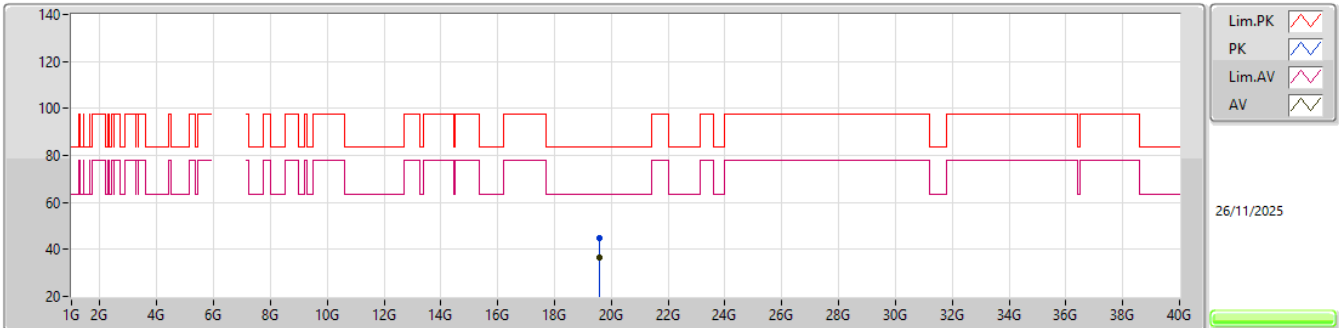


EUT_Y_4TX
Setting 33
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.57517G	44.88	83.54	-38.66	39.61	1	Vertical	282	1.52	-	37.70	17.12	49.55			
AV	19.57294G	36.81	63.54	-26.73	31.54	1	Vertical	282	1.52	-	37.70	17.12	49.55			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6525MHz_TX

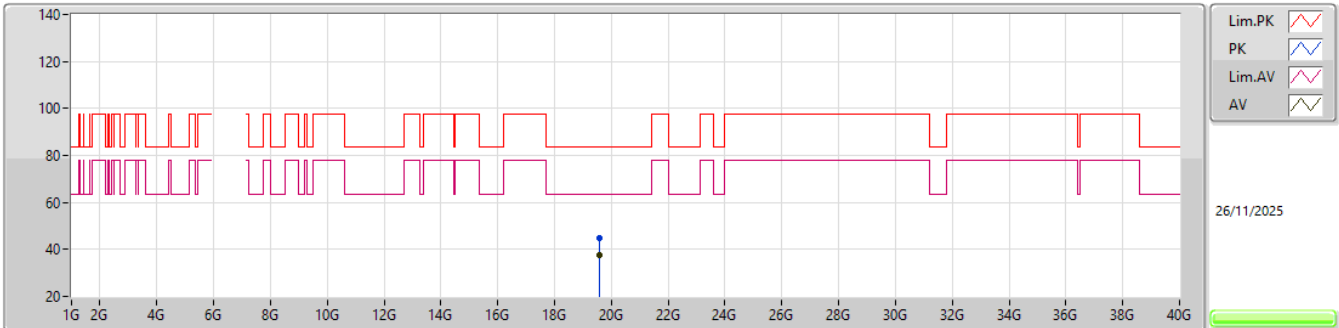


EUT_V_4TX
Setting 33
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.57756G	44.91	83.54	-38.63	39.64	1	Horizontal	336	1.87	-	37.70	17.12	49.55			
AV	19.57397G	37.39	63.54	-26.15	32.12	1	Horizontal	336	1.87	-	37.70	17.12	49.55			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

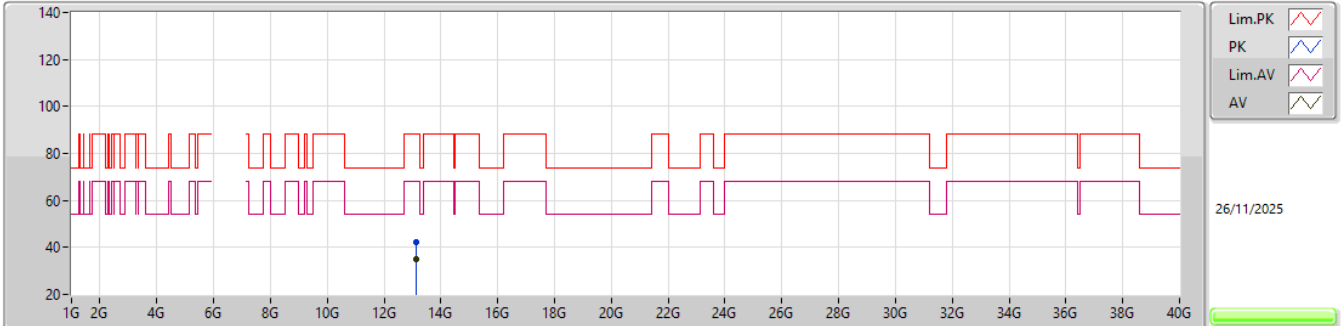


EUT_V_4TX
Setting 30
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.13198G	42.09	88.20	-46.11	55.74	3	Vertical	157	1.08	-	39.43	11.79	64.87			
RMS	13.1198G	35.00	68.20	-33.20	48.71	3	Vertical	157	1.08	-	39.38	11.78	64.87			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

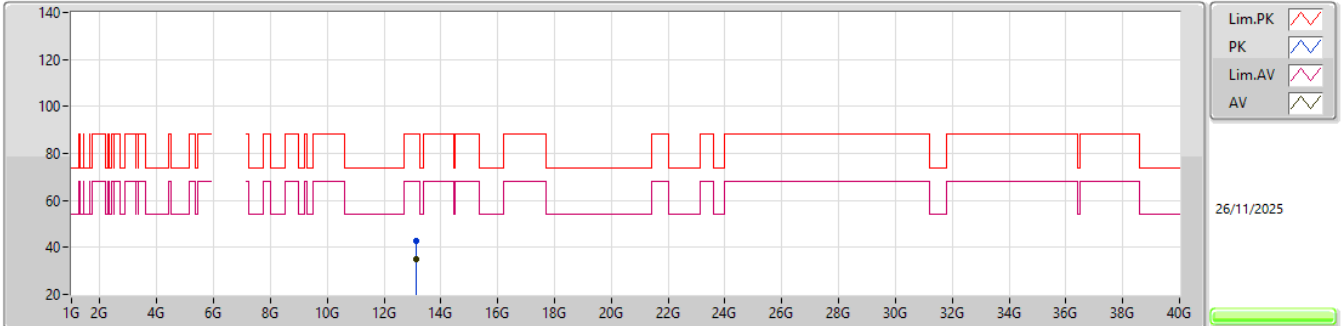


EUT_V_4TX
Setting 30
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.14242G	42.53	88.20	-45.67	56.13	3	Horizontal	13	1.30	-	39.47	11.80	64.87			
RMS	13.12208G	35.16	68.20	-33.04	48.85	3	Horizontal	13	1.30	-	39.39	11.79	64.87			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

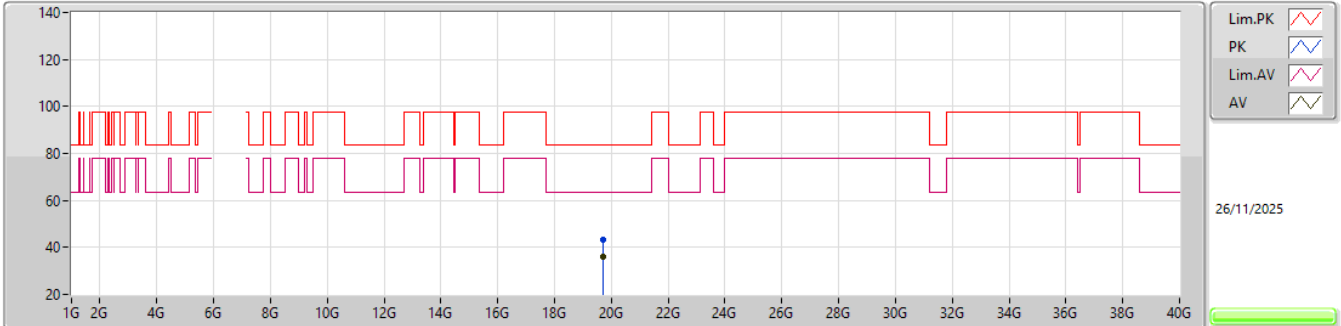


EUT_Y_4TX
Setting 30
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69164G	43.03	83.54	-40.51	37.54	1	Vertical	78	2.20	-	37.77	17.19	49.47			
AV	19.69398G	35.88	63.54	-27.66	30.38	1	Vertical	78	2.20	-	37.78	17.19	49.47			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

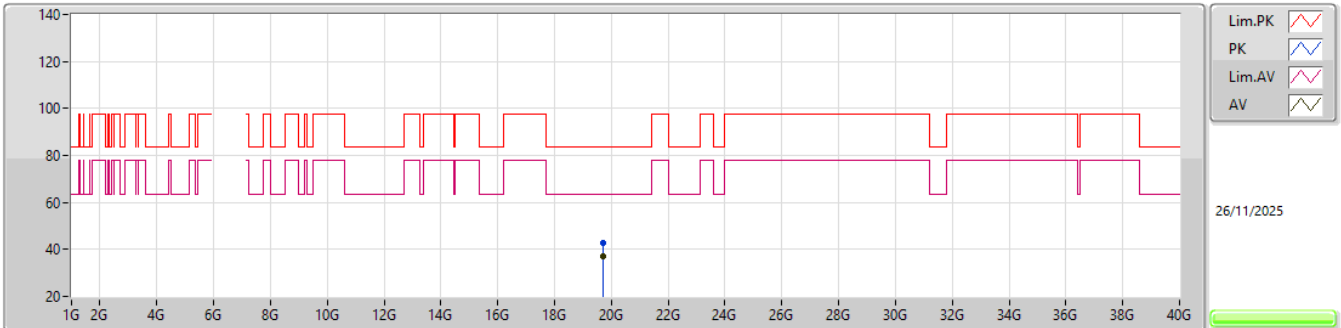


EUT_Y_4TX
Setting 30
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69178G	42.81	83.54	-40.73	37.32	1	Horizontal	321	2.63	-	37.77	17.19	49.47			
AV	19.69923G	37.29	63.54	-26.25	31.75	1	Horizontal	321	2.63	-	37.80	17.20	49.46			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6685MHz_TX

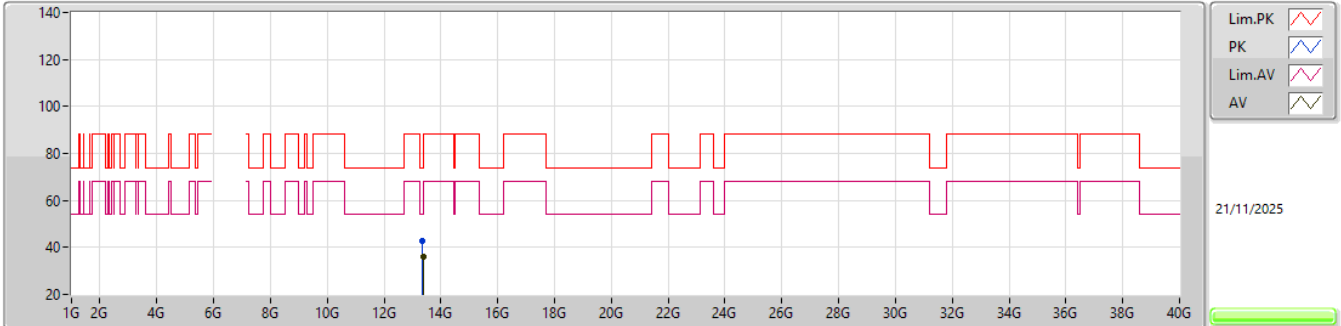


EUT_V_4TX
Setting 34
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.35854G	42.61	74.00	-31.39	55.50	3	Vertical	55	1.28	-	40.02	11.93	64.84			
AV	13.37378G	35.78	54.00	-18.22	48.63	3	Vertical	55	1.28	-	40.05	11.94	64.84			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6685MHz_TX

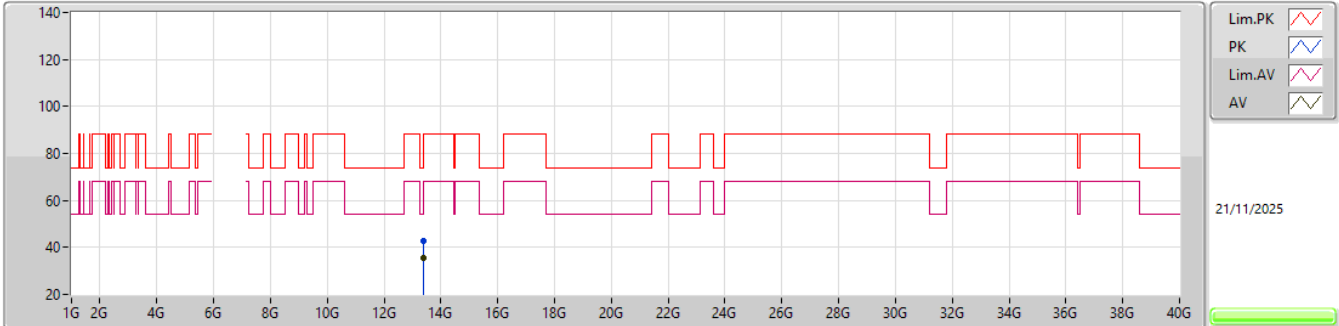


EUT V_4TX
Setting 34
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.3694G	42.93	74.00	-31.07	55.79	3	Horizontal	318	2.59	-	40.04	11.94	64.84			
AV	13.3724G	35.55	54.00	-18.45	48.41	3	Horizontal	318	2.59	-	40.04	11.94	64.84			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6685MHz_TX

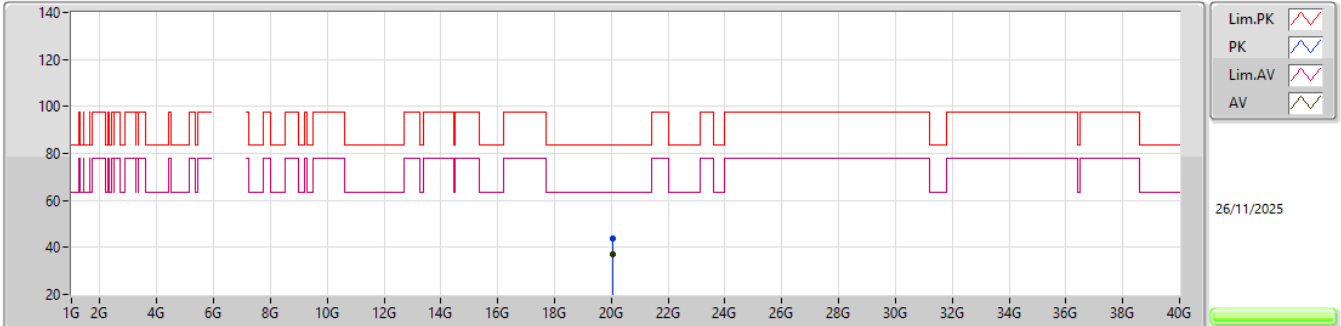


EUT_Y_4TX
Setting 34
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.05941G	43.58	83.54	-39.96	37.84	1	Vertical	178	2.92	-	37.62	17.38	49.26			
AV	20.05203G	36.91	63.54	-26.63	31.19	1	Vertical	178	2.92	-	37.60	17.38	49.26			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6685MHz_TX

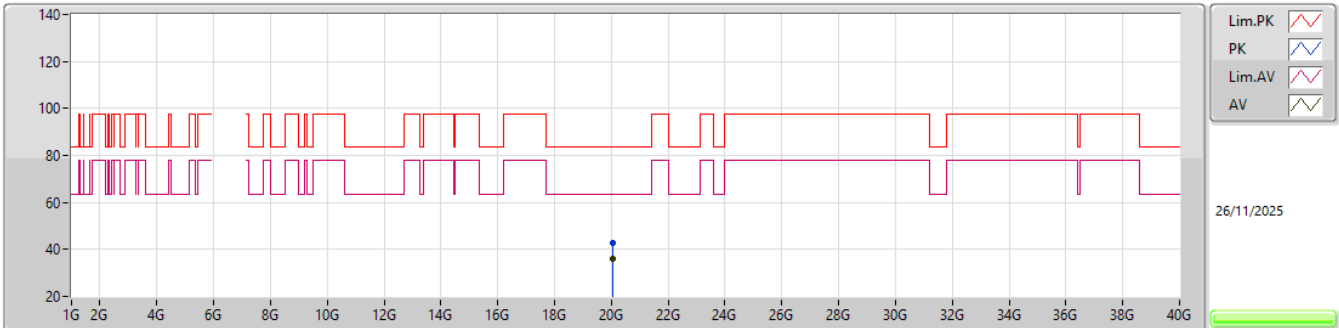


EUT_Y_4TX
Setting 34
06-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.05893G	43.01	83.54	-40.53	37.27	1	Horizontal	146	2.61	-	37.62	17.38	49.26			
AV	20.05671G	35.87	63.54	-27.67	30.14	1	Horizontal	146	2.61	-	37.61	17.38	49.26			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6885MHz_TX

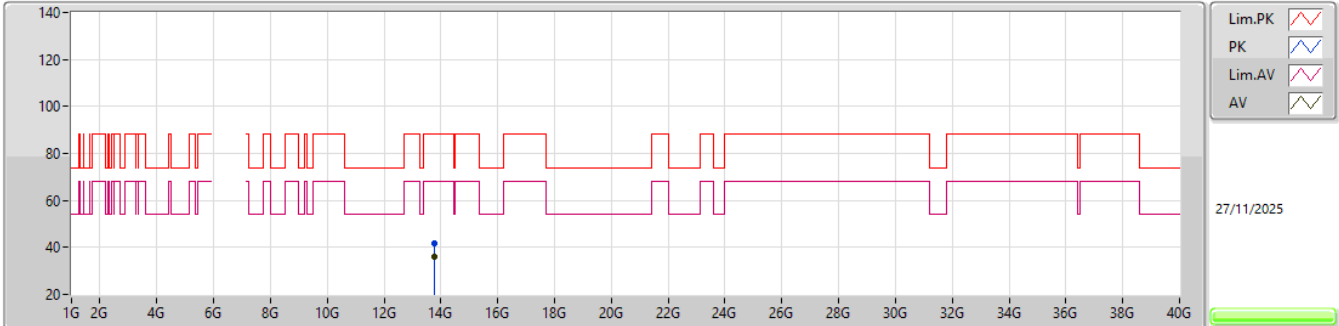


EUT_V_4TX
Setting 37
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.75734G	41.75	88.20	-46.45	54.07	3	Vertical	23	1.22	-	40.21	12.18	64.71			
RMS	13.75872G	36.08	68.20	-32.12	48.39	3	Vertical	23	1.22	-	40.22	12.18	64.71			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6885MHz_TX

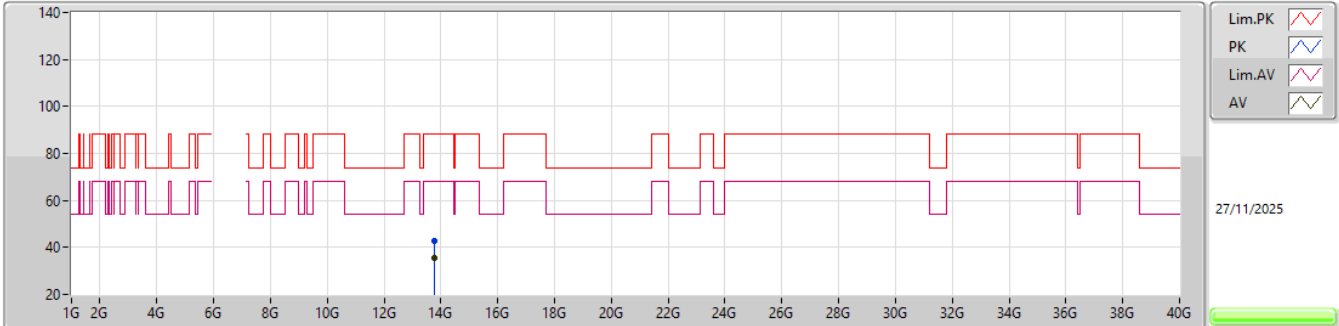


EUT_V_4TX
Setting 37
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7556G	42.88	88.20	-45.32	55.20	3	Horizontal	310	2.60	-	40.21	12.18	64.71			
RMS	13.7718G	35.39	68.20	-32.81	47.66	3	Horizontal	310	2.60	-	40.24	12.19	64.70			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6885MHz_TX

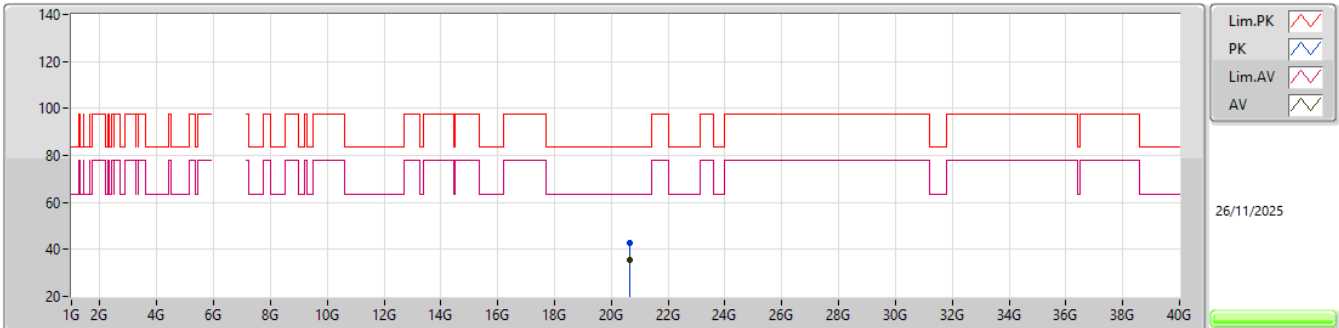


EUT_V_4TX
Setting 37
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.65817G	42.62	83.54	-40.92	36.44	1	Vertical	329	2.61	-	37.87	17.46	49.15			
AV	20.65383G	35.33	63.54	-28.21	29.14	1	Vertical	329	2.61	-	37.88	17.46	49.15			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6885MHz_TX

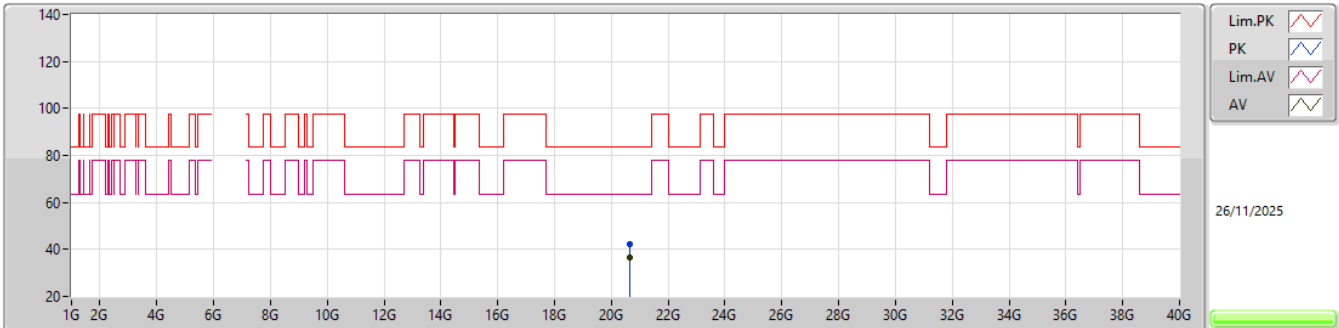


EUT_V_4TX
Setting 37
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.65928G	42.41	83.54	-41.13	36.24	1	Horizontal	334	1.88	-	37.86	17.46	49.15			
AV	20.65207G	36.30	63.54	-27.24	30.10	1	Horizontal	334	1.88	-	37.89	17.46	49.15			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6925MHz_TX

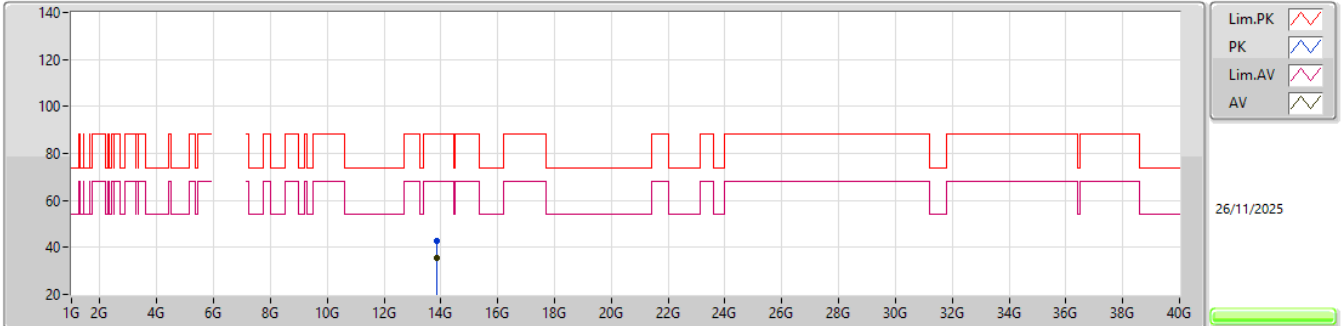


EUT_V_4TX
Setting 35
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.847G	42.63	88.20	-45.57	54.76	3	Vertical	100	2.84	-	40.30	12.24	64.67			
RMS	13.8473G	35.33	68.20	-32.87	47.46	3	Vertical	100	2.84	-	40.30	12.24	64.67			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6925MHz_TX

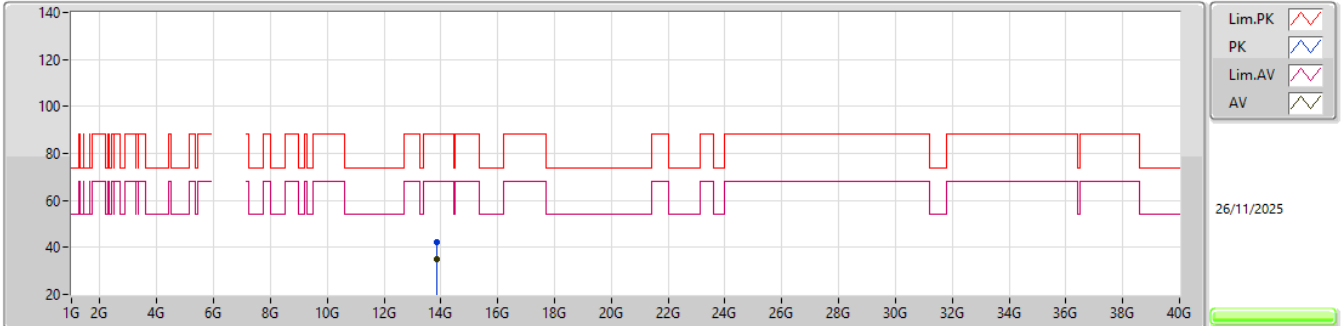


EUT_V_4TX
Setting 35
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.84058G	42.02	88.20	-46.18	54.16	3	Horizontal	124	1.41	-	40.30	12.23	64.67			
RMS	13.8461G	35.19	68.20	-33.01	47.33	3	Horizontal	124	1.41	-	40.30	12.23	64.67			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6925MHz_TX

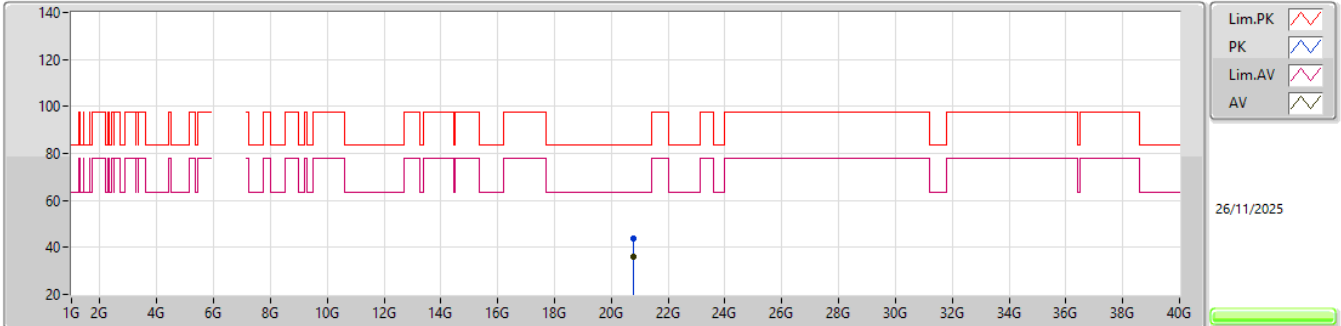


EUT_Y_4TX
Setting 35
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.77722G	43.86	83.54	-39.68	37.63	1	Vertical	176	2.92	-	37.84	17.48	49.09			
AV	20.77528G	35.89	63.54	-27.65	29.65	1	Vertical	176	2.92	-	37.85	17.48	49.09			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6925MHz_TX

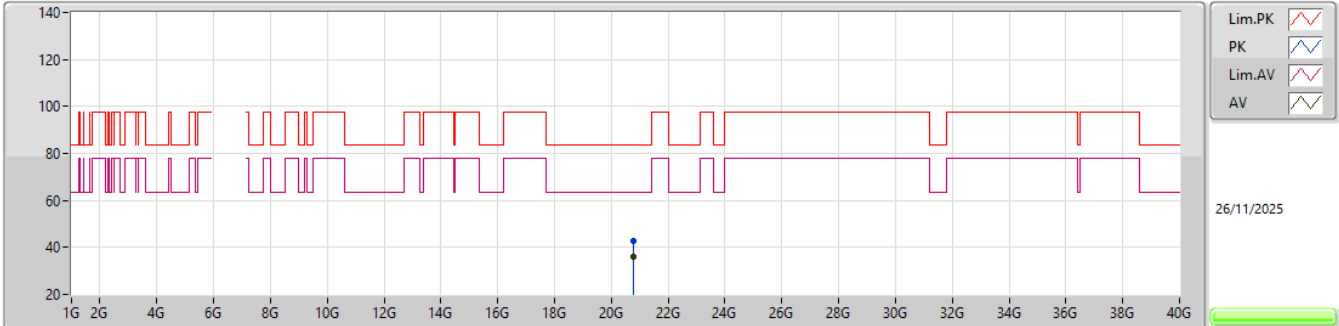


EUT_V_4TX
Setting 35
06-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.77686G	42.99	83.54	-40.55	36.76	1	Horizontal	339	2.77	-	37.84	17.48	49.09			
AV	20.77272G	36.14	63.54	-27.40	29.89	1	Horizontal	339	2.77	-	37.86	17.48	49.09			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

7005MHz_TX

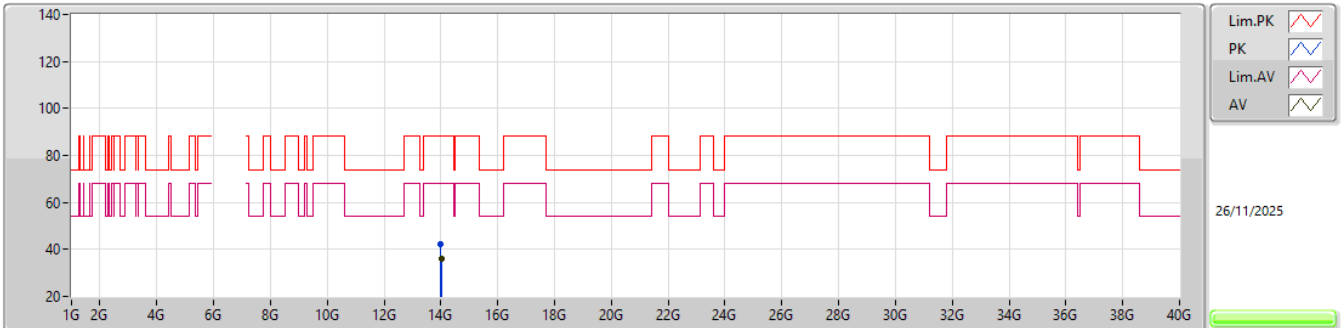


EUT_V_4TX
Setting 38
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.00688G	42.34	88.20	-45.86	54.07	3	Vertical	140	2.39	-	40.53	12.34	64.60			
RMS	14.0241G	36.24	68.20	-31.96	47.88	3	Vertical	140	2.39	-	40.60	12.35	64.59			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

7005MHz_TX

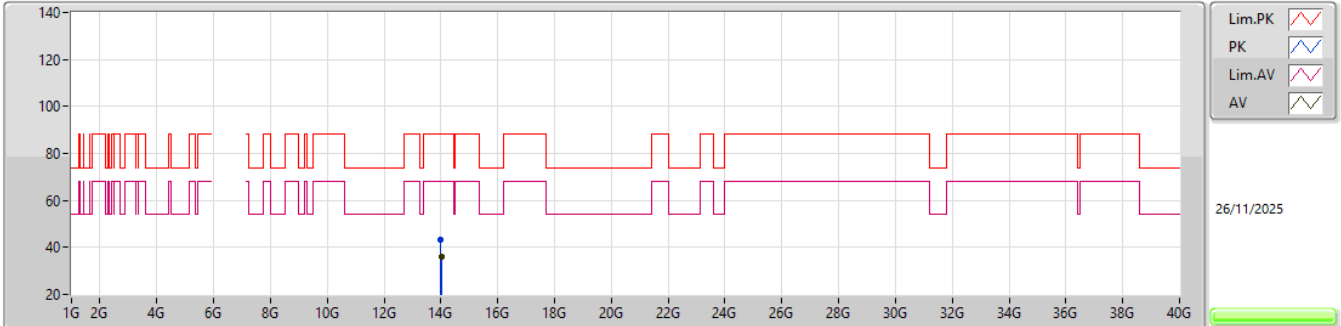


EUT_V_4TX
Setting 38
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.00436G	43.45	88.20	-44.75	55.20	3	Horizontal	129	1.79	-	40.52	12.33	64.60			
RMS	14.00736G	35.78	68.20	-32.42	47.51	3	Horizontal	129	1.79	-	40.53	12.34	64.60			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

7005MHz_TX

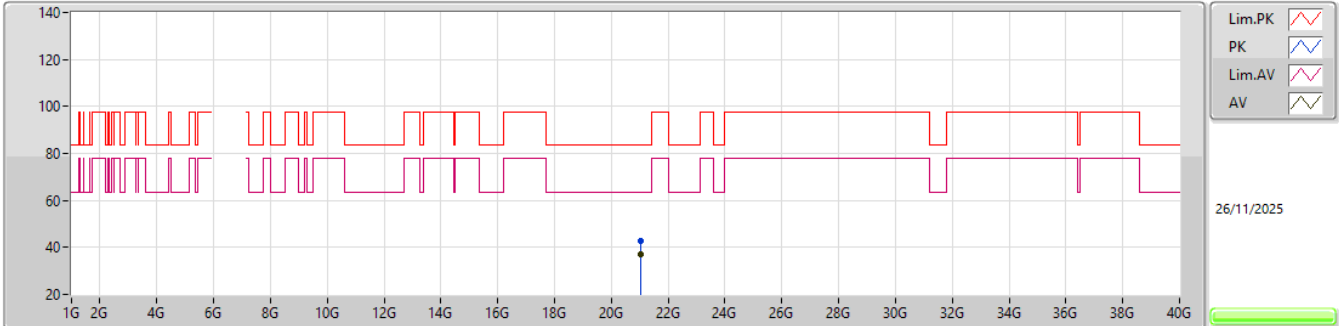


EUT_Y_4TX
Setting 38
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.01569G	42.93	83.54	-40.61	36.37	1	Vertical	354	2.62	-	38.00	17.52	48.96			
AV	21.01591G	37.28	63.54	-26.26	30.72	1	Vertical	354	2.62	-	38.00	17.52	48.96			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


7005MHz_TX

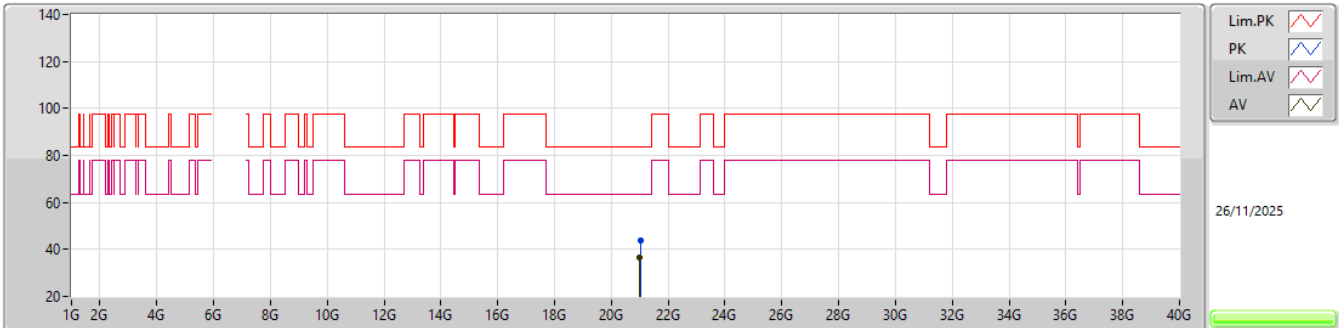EUT_Y_4TX
Setting 38
06-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.01474G	43.70	83.54	-39.84	37.14	1	Horizontal	155	2.52	-	38.00	17.52	48.96			
AV	21.01202G	36.68	63.54	-26.86	30.13	1	Horizontal	155	2.52	-	38.00	17.51	48.96			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

7085MHz_TX

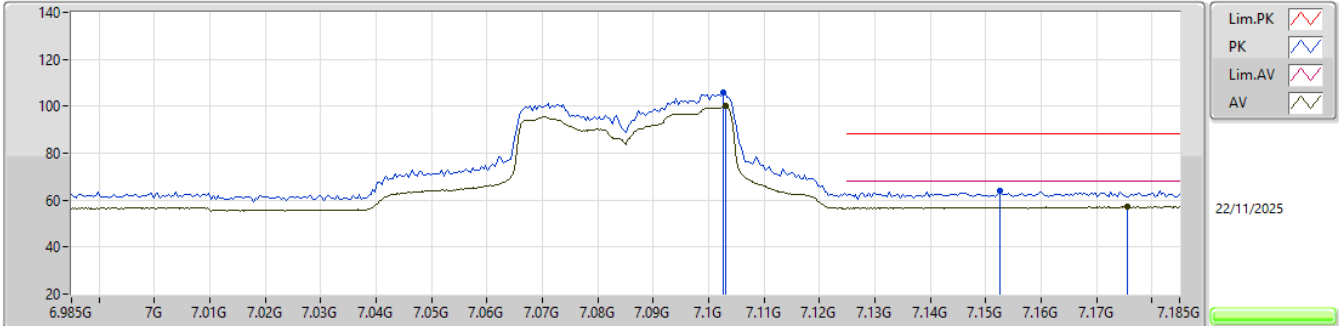


EUT_Y_4TX
Setting 34
06-U-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	7.1026G	105.82	Inf	-Inf	94.82	3	Vertical	58	2.88	-	36.01	8.44	33.45				
RMS	7.103G	100.14	Inf	-Inf	89.14	3	Vertical	58	2.88	-	36.01	8.44	33.45				
PK	7.1526G	64.16	88.20	-24.04	52.98	3	Vertical	58	2.88	-	36.21	8.44	33.47				
RMS	7.1756G	57.19	68.20	-11.01	45.97	3	Vertical	58	2.88	-	36.25	8.45	33.48				

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

7085MHz_TX

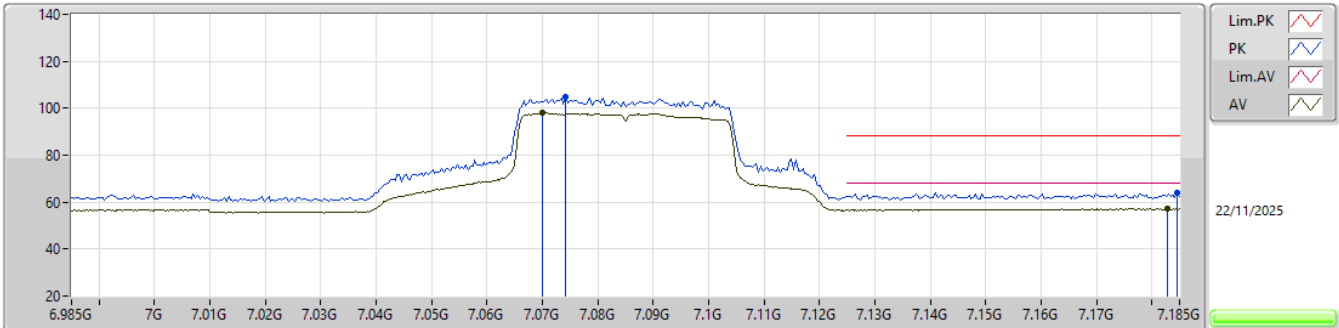


EUT_Y_4TX
Setting 34
06-U-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0742G	104.72	Inf	-Inf	93.93	3	Horizontal	293	3.00	-	35.79	8.43	33.43			
RMS	7.07G	97.99	Inf	-Inf	87.23	3	Horizontal	293	3.00	-	35.76	8.43	33.43			
PK	7.1846G	64.21	88.20	-23.99	52.97	3	Horizontal	293	3.00	-	36.27	8.45	33.48			
RMS	7.1828G	57.18	68.20	-11.02	45.94	3	Horizontal	293	3.00	-	36.27	8.45	33.48			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

7085MHz_TX

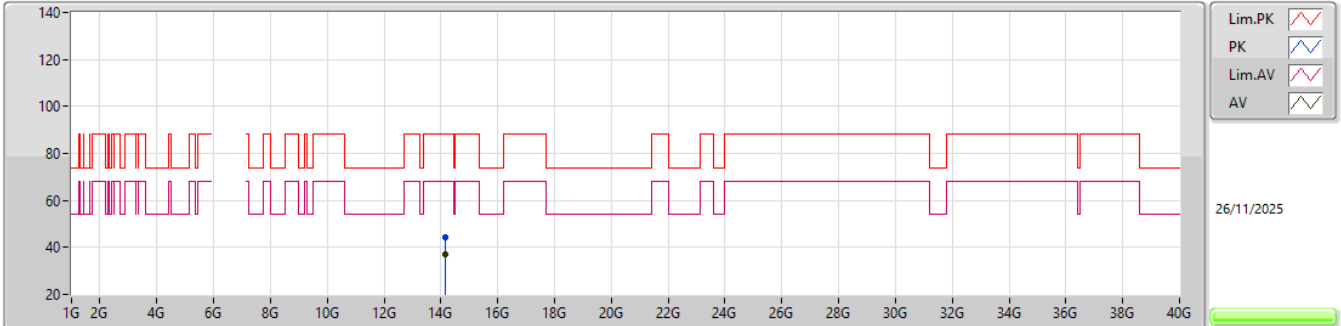


EUT_Y_4TX
Setting 34
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.1727G	44.07	88.20	-44.13	55.50	3	Vertical	348	1.10	-	40.60	12.47	64.50			
RMS	14.16898G	37.16	68.20	-31.04	48.59	3	Vertical	348	1.10	-	40.60	12.47	64.50			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

7085MHz_TX

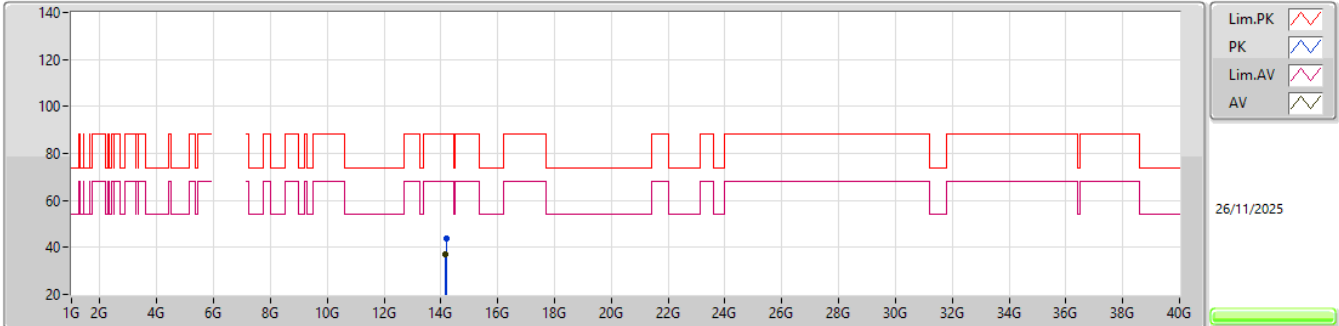


EUT_V_4TX
Setting 34
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.17942G	43.68	88.20	-44.52	55.10	3	Horizontal	298	1.82	-	40.60	12.47	64.49			
RMS	14.1697G	37.23	68.20	-30.97	48.66	3	Horizontal	298	1.82	-	40.60	12.47	64.50			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

7085MHz_TX

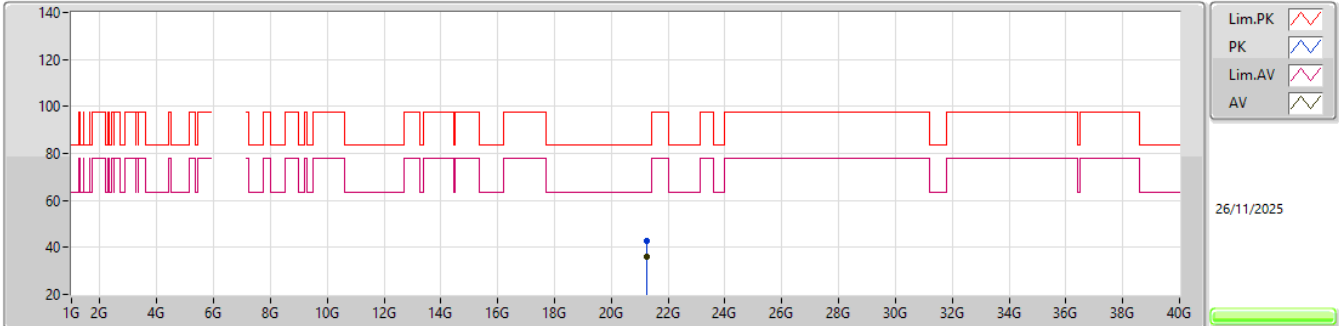


EUT_Y_4TX
Setting 34
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.2544G	42.87	83.54	-40.67	36.22	1	Vertical	146	2.81	-	37.91	17.60	48.86			
AV	21.25408G	36.21	63.54	-27.33	29.56	1	Vertical	146	2.81	-	37.91	17.60	48.86			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

7085MHz_TX

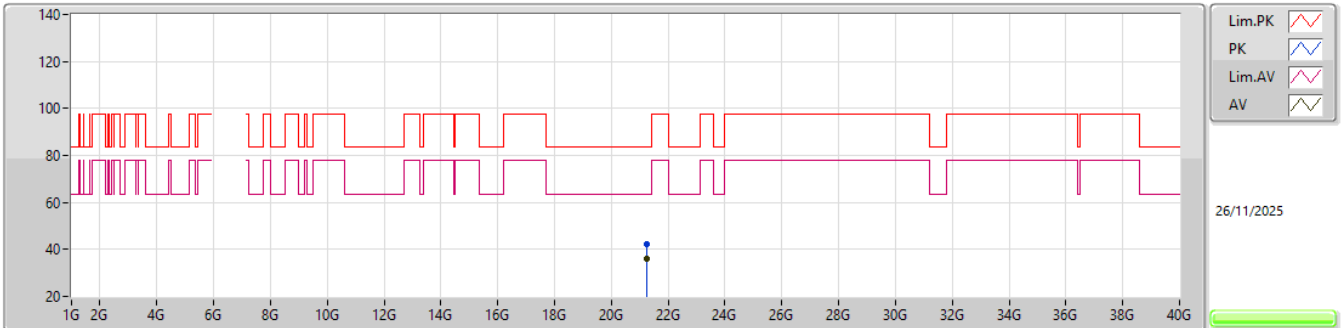


EUT_Y_4TX
Setting 34
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.25399G	42.42	83.54	-41.12	35.77	1	Horizontal	299	1.49	-	37.91	17.60	48.86			
AV	21.25297G	35.97	63.54	-27.57	29.32	1	Horizontal	299	1.49	-	37.91	17.60	48.86			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

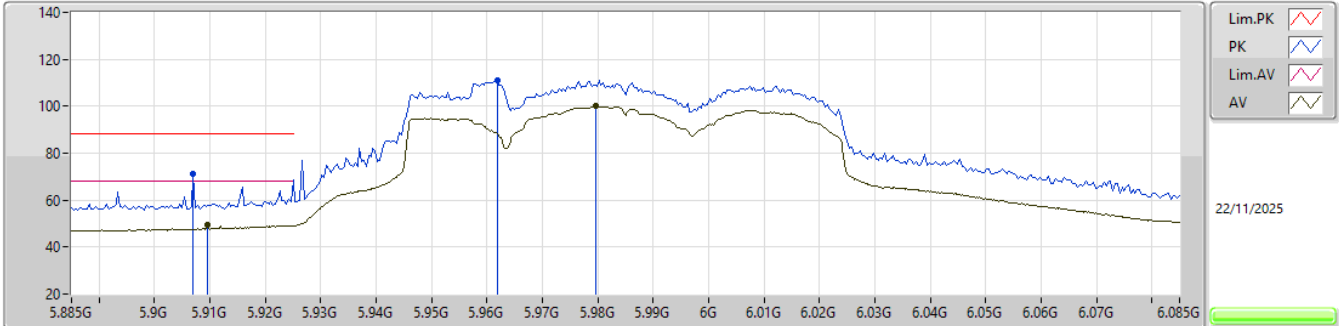


EUT_Y_4TX
Setting 72
06-U-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.907G	71.46	88.20	-16.74	65.47	3	Vertical	57	1.34	-	32.21	7.54	33.76			
RMS	5.9096G	49.37	68.20	-18.83	43.36	3	Vertical	57	1.34	-	32.22	7.55	33.76			
PK	5.9618G	111.27	Inf	-Inf	105.06	3	Vertical	57	1.34	-	32.32	7.64	33.75			
RMS	5.9796G	100.01	Inf	-Inf	93.73	3	Vertical	57	1.34	-	32.36	7.67	33.75			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

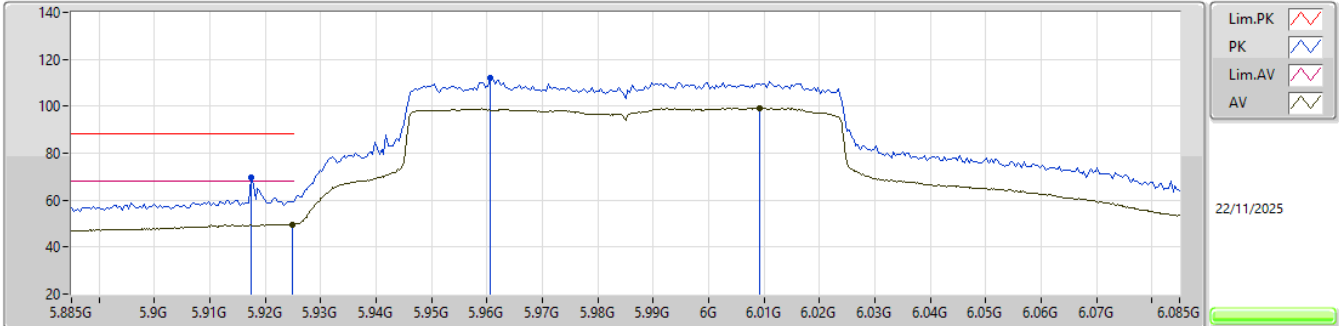


EUT_Y_4TX
Setting 72
06-U-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9174G	69.61	88.20	-18.59	63.58	3	Horizontal	280	2.02	-	32.23	7.56	33.76			
RMS	5.9248G	49.74	68.20	-18.46	43.68	3	Horizontal	280	2.02	-	32.25	7.57	33.76			
PK	5.9606G	112.08	Inf	-Inf	105.87	3	Horizontal	280	2.02	-	32.32	7.64	33.75			
RMS	6.0092G	99.15	Inf	-Inf	92.77	3	Horizontal	280	2.02	-	32.42	7.70	33.74			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

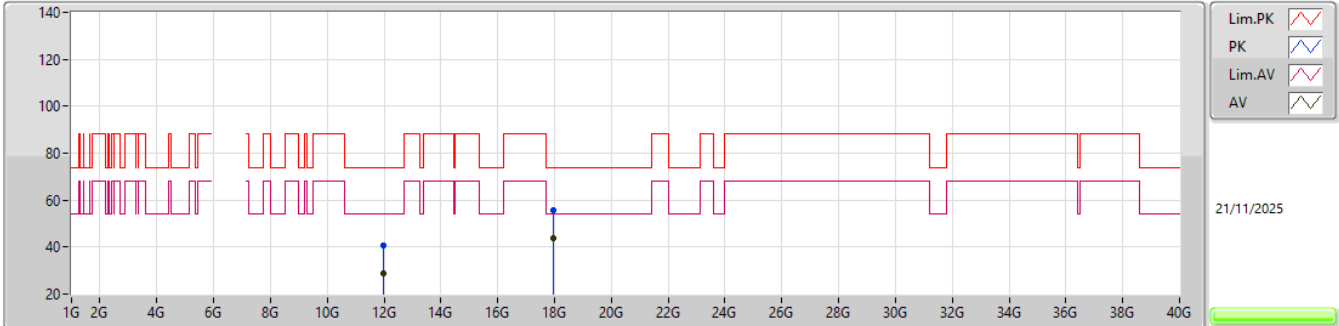


EUT_Y_4TX
Setting 72
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.96766G	40.67	74.00	-33.33	56.50	3	Vertical	73	1.98	-	38.87	11.08	65.78				
AV	11.95728G	28.83	54.00	-25.17	44.71	3	Vertical	73	1.98	-	38.83	11.08	65.79				
PK	17.96976G	55.81	74.00	-18.19	52.97	3	Vertical	347	2.45	-	52.01	14.78	63.95				
AV	17.9691G	43.71	54.00	-10.29	40.91	3	Vertical	347	2.45	-	51.97	14.78	63.95				

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

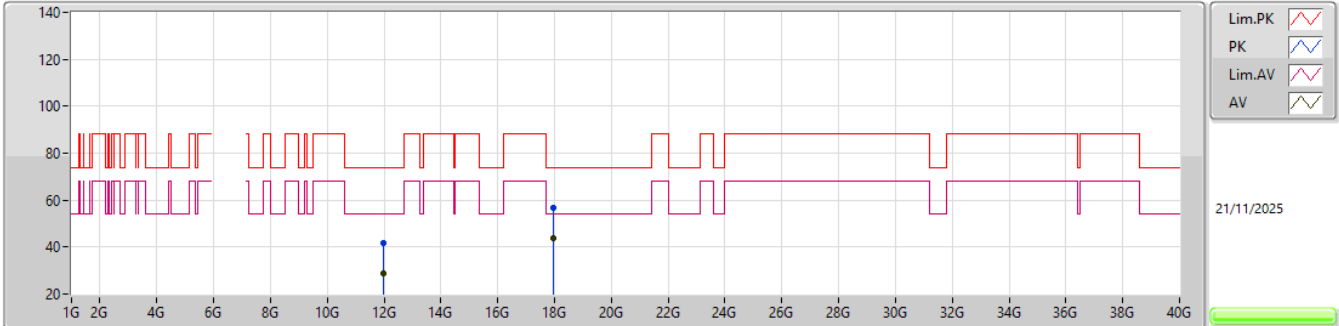


EUT_Y_4TX
Setting 72
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.96388G	41.81	74.00	-32.19	57.65	3	Horizontal	269	2.07	-	38.86	11.08	65.78			
AV	11.95974G	28.66	54.00	-25.34	44.53	3	Horizontal	269	2.07	-	38.84	11.08	65.79			
PK	17.96982G	56.69	74.00	-17.31	53.85	3	Horizontal	103	2.26	-	52.01	14.78	63.95			
AV	17.96814G	43.68	54.00	-10.32	40.93	3	Horizontal	103	2.26	-	51.92	14.78	63.95			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5985MHz_TX

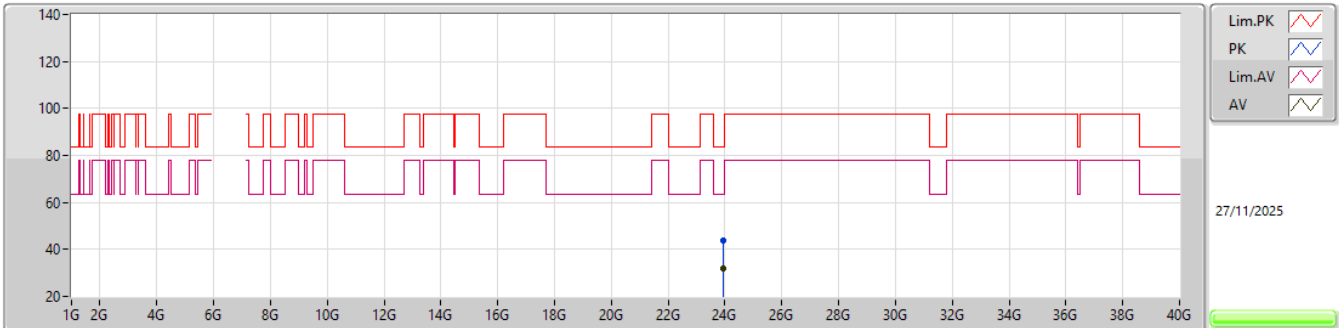EUT_Y_4TX
Setting 72
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.92542G	43.73	83.54	-39.81	33.26	1	Vertical	134	1.10	-	38.80	18.76	47.09			
AV	23.92995G	32.11	63.54	-31.43	21.61	1	Vertical	134	1.10	-	38.82	18.77	47.09			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

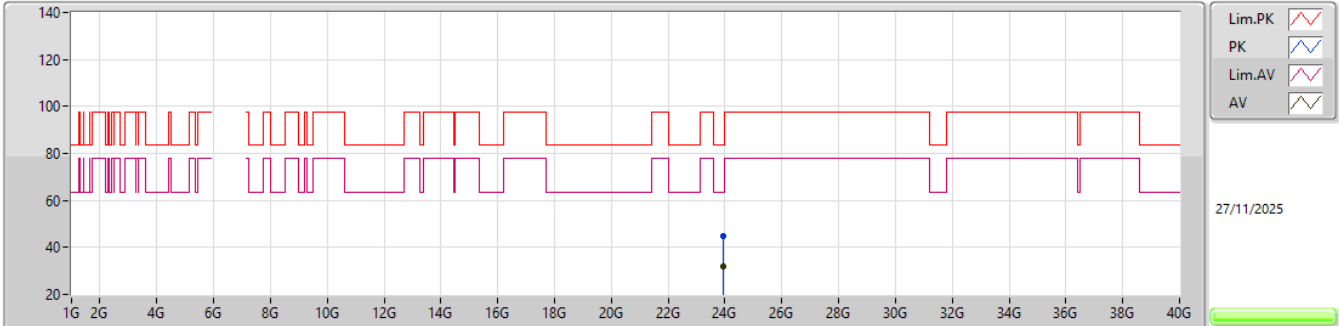


EUT_Y_4TX
Setting 72
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.95125G	45.05	83.54	-38.49	34.46	1	Horizontal	234	1.12	-	38.90	18.77	47.08			
AV	23.9259G	32.04	63.54	-31.50	21.57	1	Horizontal	234	1.12	-	38.80	18.76	47.09			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

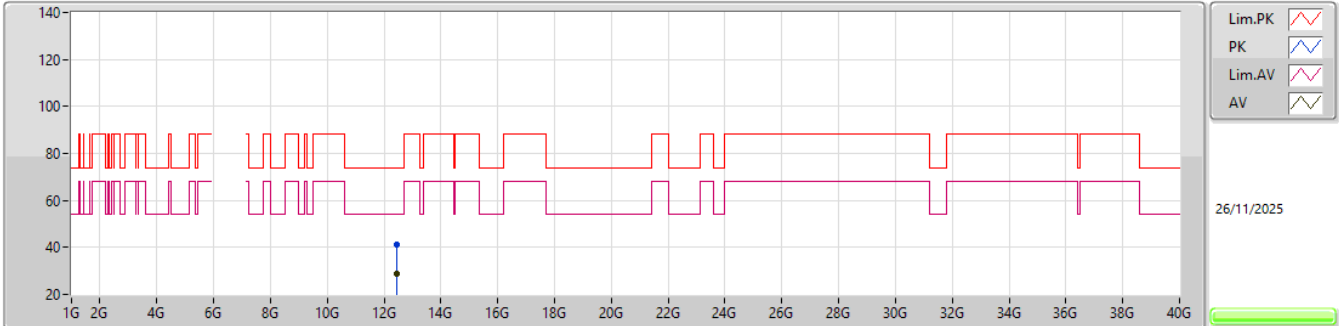


EUT_V_4TX
Setting 64
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.45042G	41.34	74.00	-32.66	56.96	3	Vertical	186	2.71	-	38.60	11.37	65.59			
AV	12.46158G	28.80	54.00	-25.20	44.40	3	Vertical	186	2.71	-	38.60	11.38	65.58			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

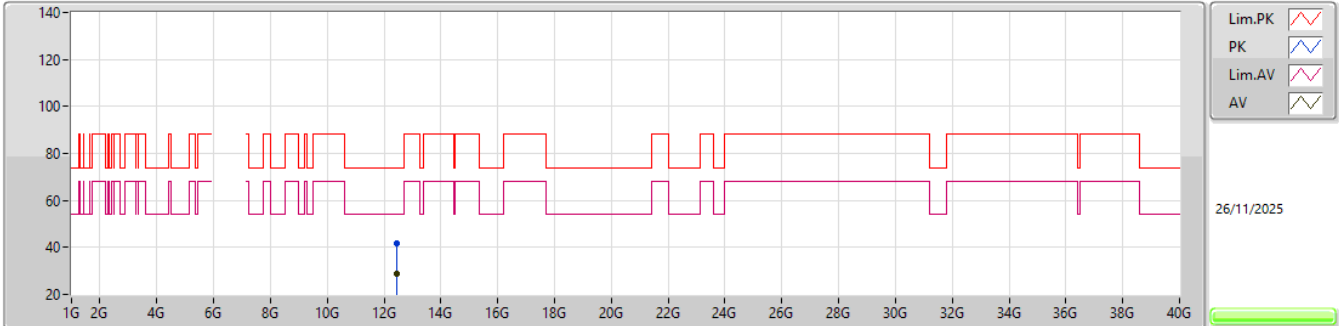


EUT_V_4TX
Setting 64
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.44922G	41.52	74.00	-32.48	57.14	3	Horizontal	287	1.36	-	38.60	11.37	65.59			
AV	12.46476G	29.05	54.00	-24.95	44.65	3	Horizontal	287	1.36	-	38.60	11.38	65.58			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


6225MHz_TX

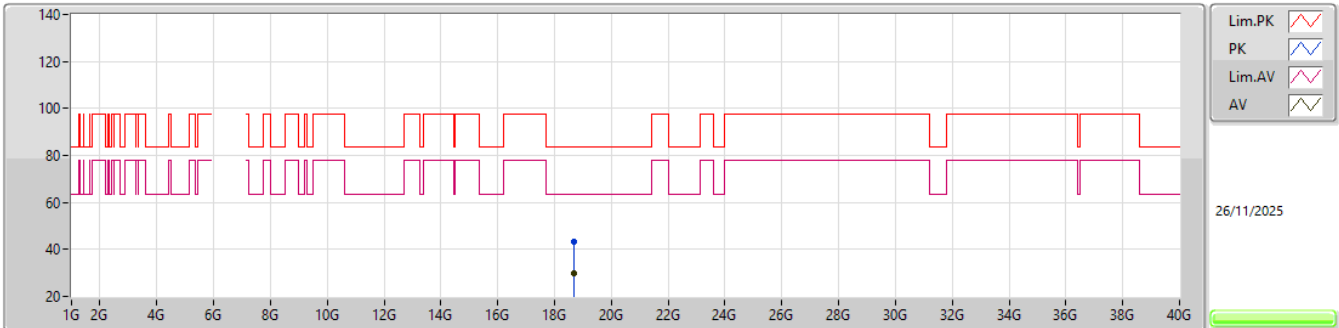EUT_V_4TX
Setting 64
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67124G	43.04	83.54	-40.50	38.34	1	Vertical	256	1.51	-	37.66	16.62	49.58			
AV	18.67025G	29.66	63.54	-33.88	24.96	1	Vertical	256	1.51	-	37.66	16.62	49.58			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

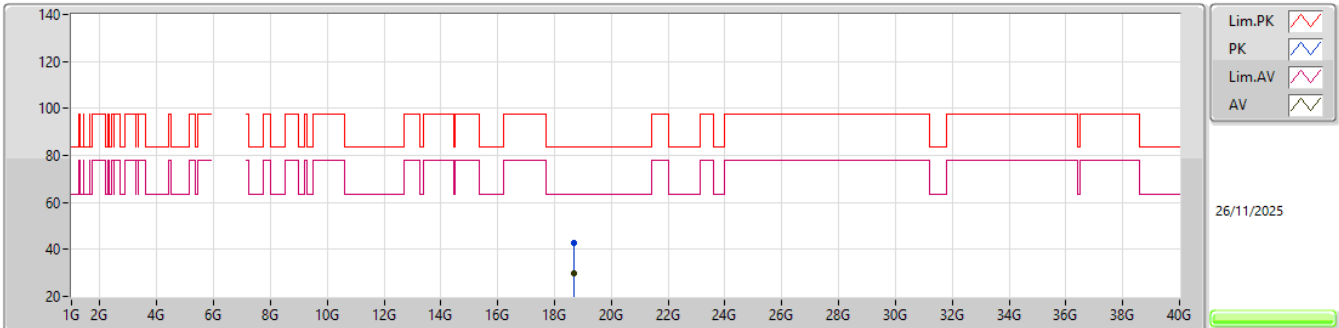


EUT_V_4TX
Setting 64
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67039G	42.60	83.54	-40.94	37.90	1	Horizontal	22	1.44	-	37.66	16.62	49.58			
AV	18.6705G	29.68	63.54	-33.86	24.98	1	Horizontal	22	1.44	-	37.66	16.62	49.58			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


6385MHz_TX

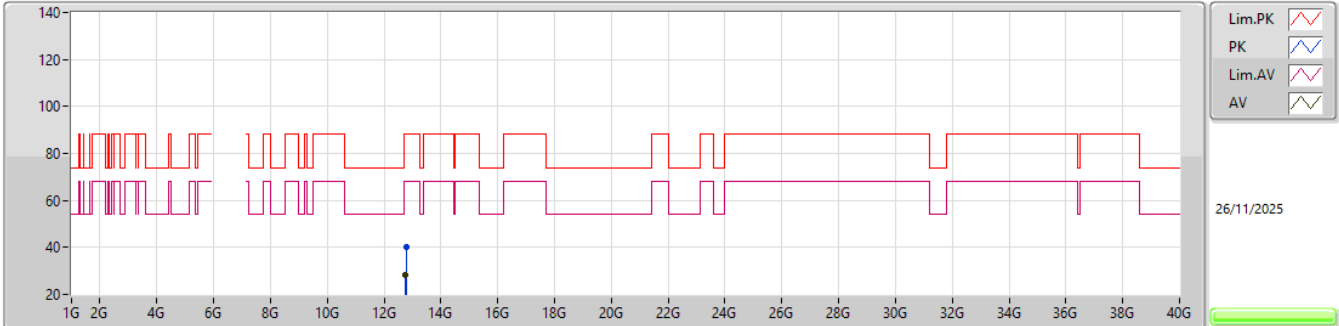EUT_V_4TX
Setting 65
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.7778G	40.40	88.20	-47.80	54.75	3	Vertical	260	2.75	-	39.27	11.57	65.19			
RMS	12.7556G	28.03	68.20	-40.17	42.56	3	Vertical	260	2.75	-	39.13	11.56	65.22			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

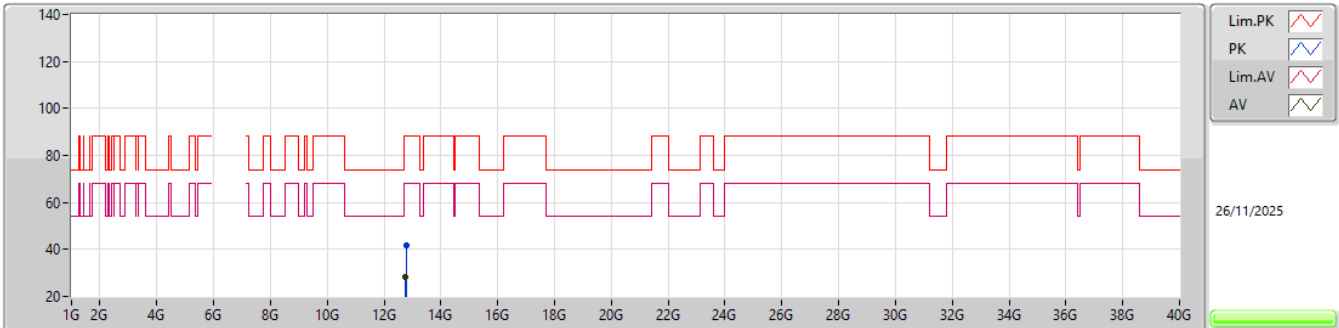


EUT_V_4TX
Setting 65
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.7796G	41.87	88.20	-46.33	56.20	3	Horizontal	268	2.37	-	39.28	11.57	65.18			
RMS	12.75566G	28.04	68.20	-40.16	42.57	3	Horizontal	268	2.37	-	39.13	11.56	65.22			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


6385MHz_TX

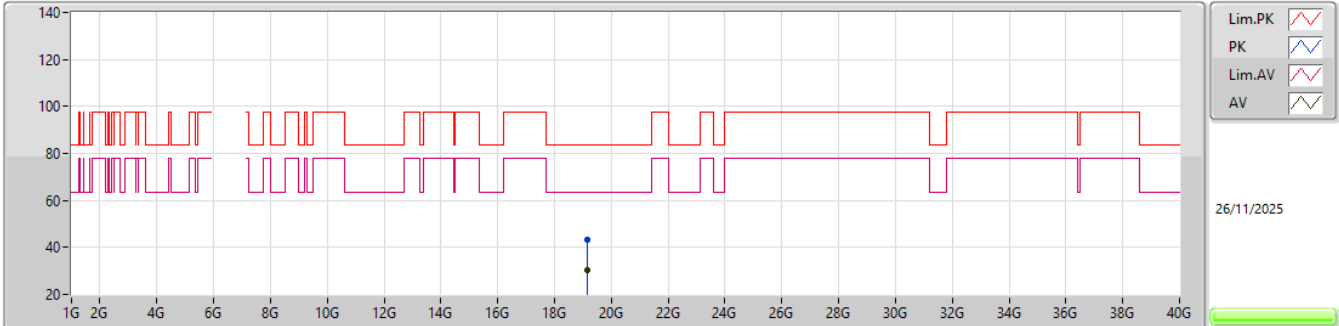EUT_Y_4TX
Setting 65
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15369G	43.16	83.54	-40.38	37.79	1	Vertical	104	2.23	-	37.89	16.88	49.40			
AV	19.15036G	30.41	63.54	-33.13	25.03	1	Vertical	104	2.23	-	37.90	16.88	49.40			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

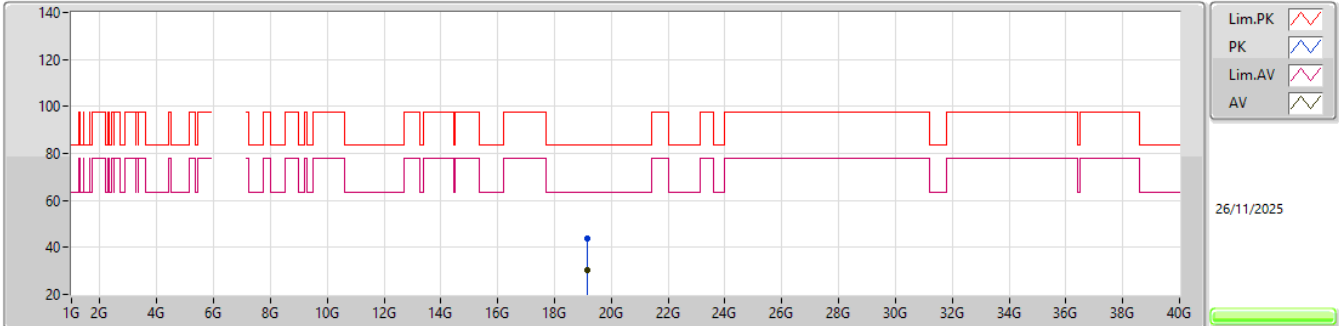


EUT_V_4TX
Setting 65
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15551G	43.87	83.54	-39.67	38.51	1	Horizontal	159	2.27	-	37.88	16.88	49.40			
AV	19.15168G	30.42	63.54	-33.12	25.05	1	Horizontal	159	2.27	-	37.89	16.88	49.40			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6465MHz_TX

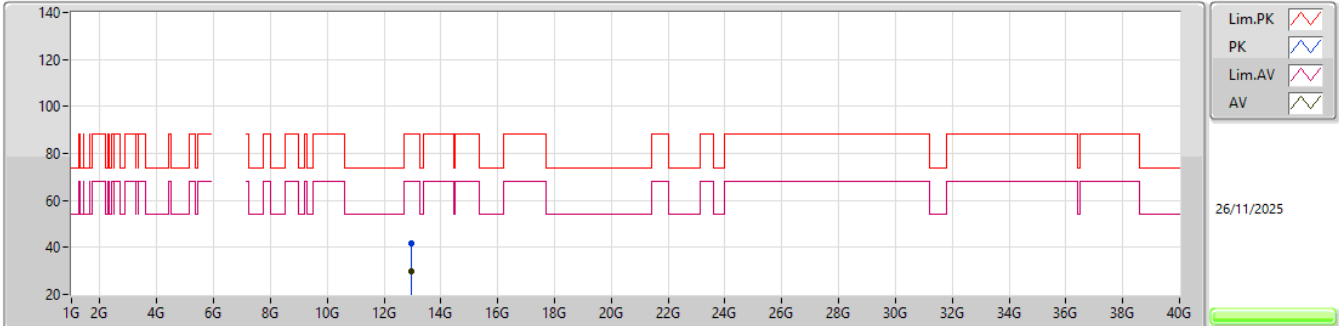


EUT_V_4TX
Setting 65
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.94236G	41.81	88.20	-46.39	55.62	3	Vertical	108	2.13	-	39.48	11.67	64.96			
RMS	12.94212G	29.96	68.20	-38.24	43.77	3	Vertical	108	2.13	-	39.48	11.67	64.96			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6465MHz_TX

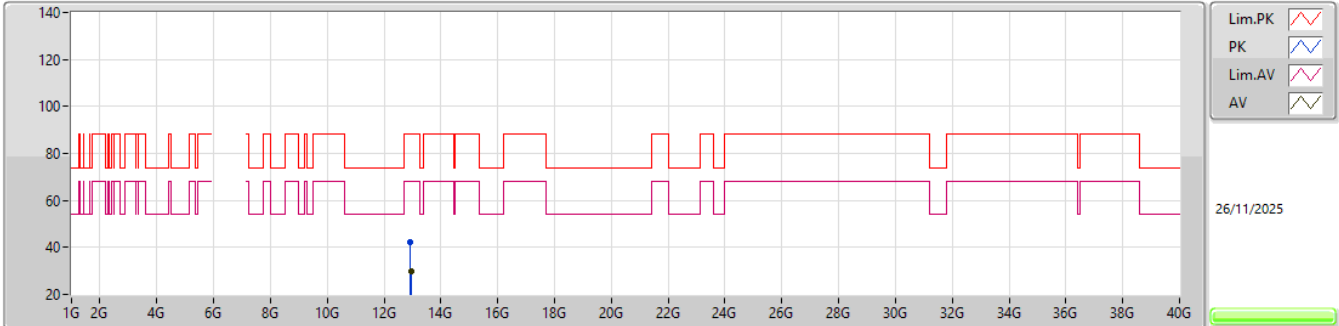


EUT_V_4TX
Setting 65
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.92526G	42.19	88.20	-46.01	56.06	3	Horizontal	231	2.05	-	39.45	11.66	64.98			
RMS	12.9447G	29.76	68.20	-38.44	43.55	3	Horizontal	231	2.05	-	39.49	11.68	64.96			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6465MHz_TX

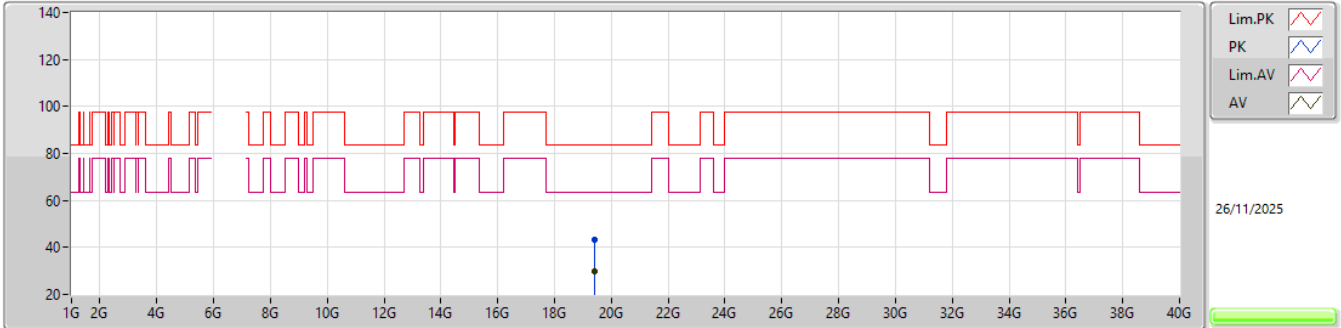


EUT_Y_4TX
Setting 65
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.39907G	43.38	83.54	-40.16	38.00	1	Vertical	49	2.78	-	37.90	17.02	49.54			
AV	19.3903G	29.99	63.54	-33.55	24.63	1	Vertical	49	2.78	-	37.88	17.02	49.54			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6465MHz_TX

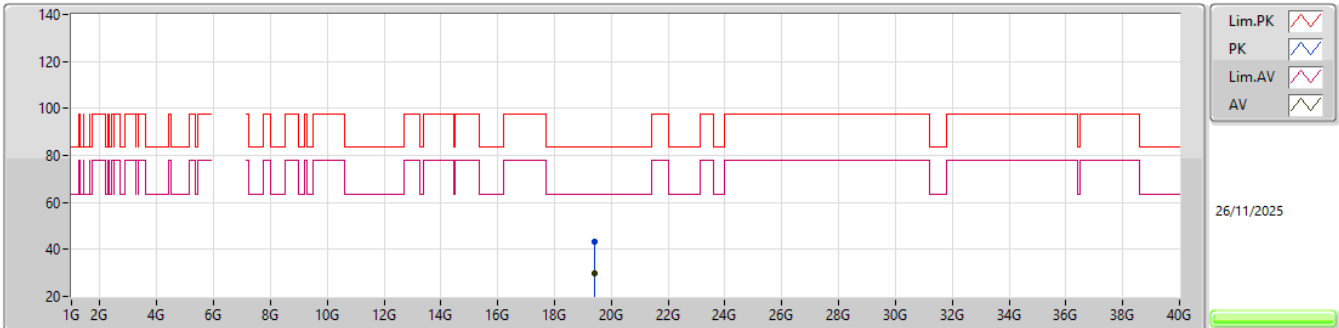


EUT_Y_4TX
Setting 65
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.39508G	43.48	83.54	-40.06	38.11	1	Horizontal	328	2.20	-	37.89	17.02	49.54			
AV	19.39002G	30.08	63.54	-33.46	24.72	1	Horizontal	328	2.20	-	37.88	17.02	49.54			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6545MHz_TX

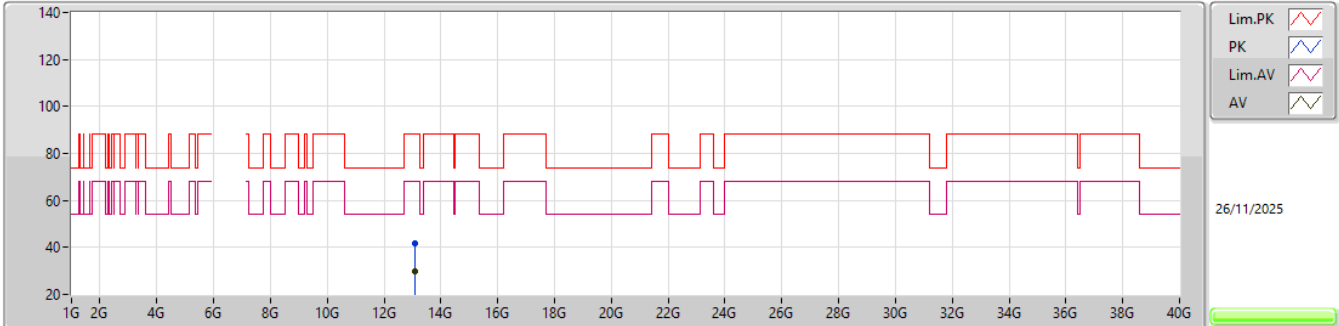


EUT_V_4TX
Setting 66
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.08052G	41.52	88.20	-46.68	55.33	3	Vertical	332	1.07	-	39.30	11.76	64.87			
RMS	13.07848G	29.61	68.20	-38.59	43.42	3	Vertical	332	1.07	-	39.30	11.76	64.87			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6545MHz_TX

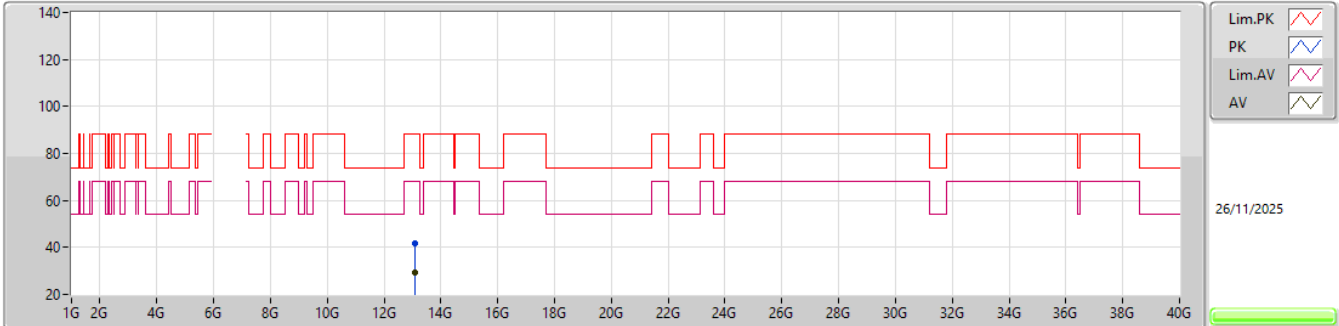


EUT_V_4TX
Setting 66
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.07644G	41.70	88.20	-46.50	55.51	3	Horizontal	165	2.55	-	39.30	11.76	64.87			
RMS	13.08022G	29.56	68.20	-38.64	43.37	3	Horizontal	165	2.55	-	39.30	11.76	64.87			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6545MHz_TX

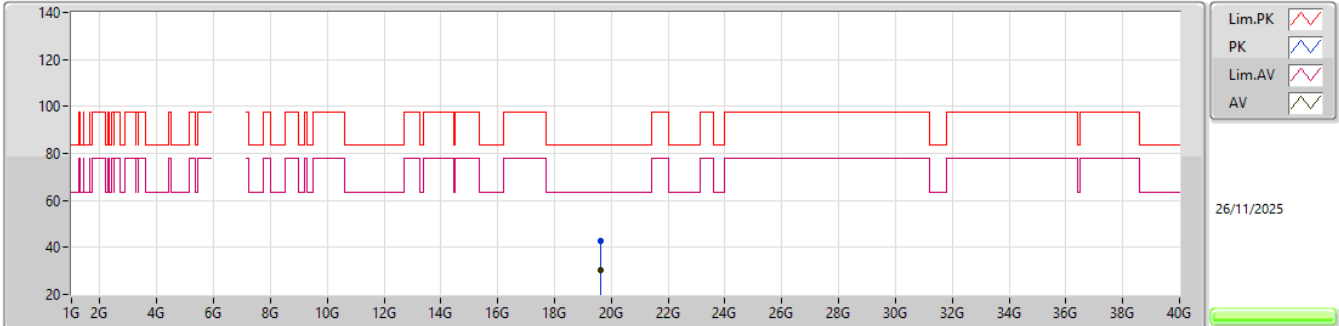


EUT_V_4TX
Setting 66
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63078G	43.01	83.54	-40.53	37.72	1	Vertical	211	2.09	-	37.64	17.16	49.51			
AV	19.63755G	30.51	63.54	-33.03	25.24	1	Vertical	211	2.09	-	37.62	17.16	49.51			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6545MHz_TX

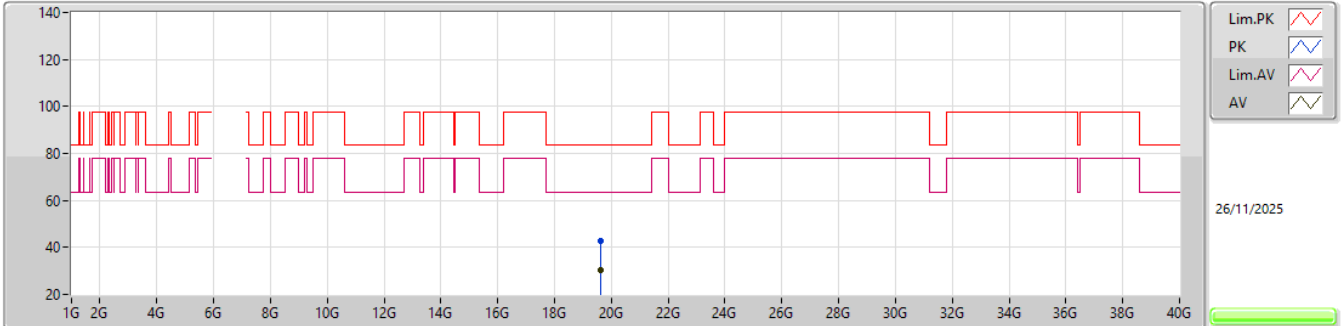


EUT_Y_4TX
Setting 66
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63787G	42.66	83.54	-40.88	37.39	1	Horizontal	110	2.90	-	37.62	17.16	49.51			
AV	19.63099G	30.46	63.54	-33.08	25.17	1	Horizontal	110	2.90	-	37.64	17.16	49.51			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

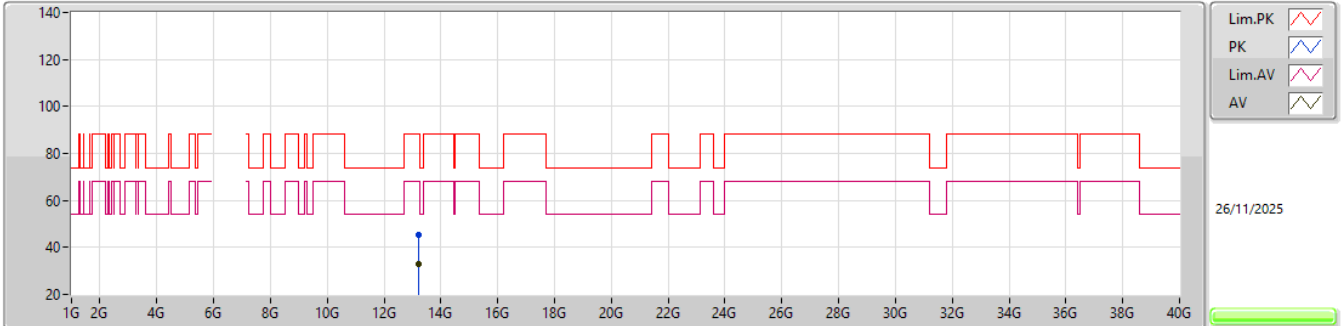


EUT_V_4TX
Setting 60
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.23662G	45.10	88.20	-43.10	58.53	3	Vertical	156	2.05	-	39.57	11.86	64.86			
RMS	13.23506G	32.72	68.20	-35.48	46.15	3	Vertical	156	2.05	-	39.57	11.86	64.86			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

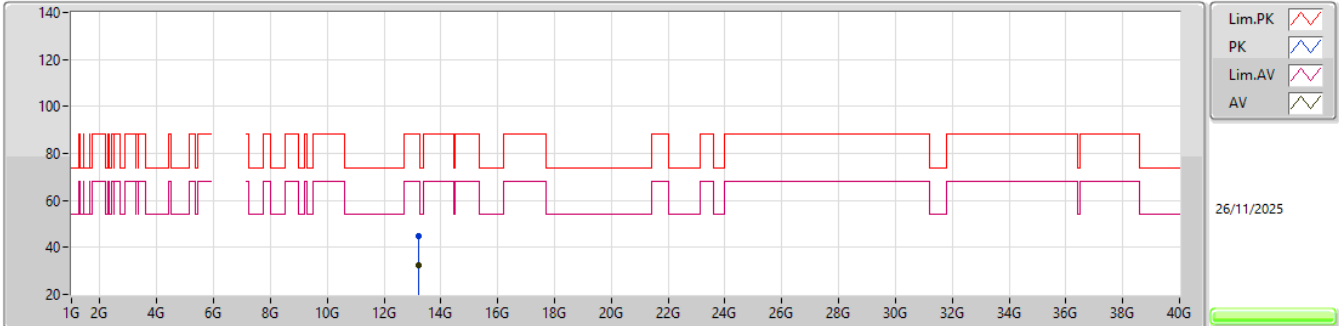


EUT_V_4TX
Setting 60
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.23518G	44.76	88.20	-43.44	58.19	3	Horizontal	319	2.36	-	39.57	11.86	64.86			
RMS	13.23518G	32.47	68.20	-35.73	45.90	3	Horizontal	319	2.36	-	39.57	11.86	64.86			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

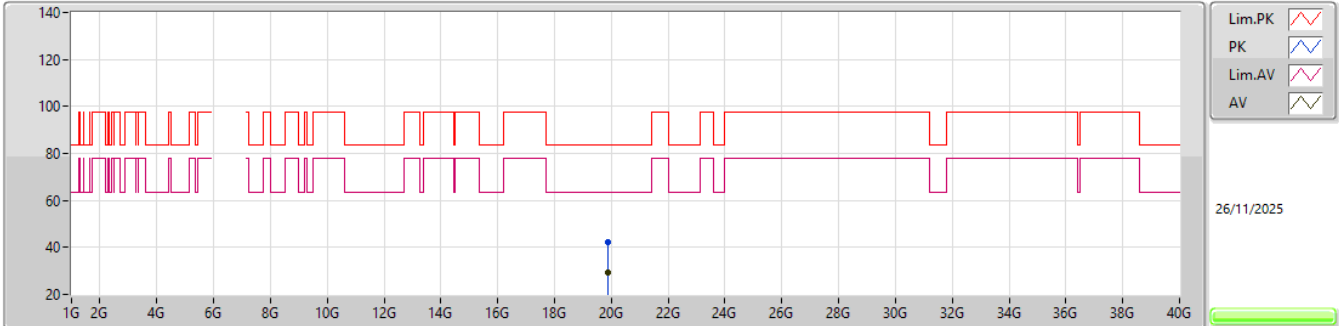


EUT_V_4TX
Setting 60
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.8785G	42.09	83.54	-41.45	36.49	1	Vertical	208	1.86	-	37.64	17.30	49.34			
AV	19.87069G	29.49	63.54	-34.05	23.88	1	Vertical	208	1.86	-	37.66	17.30	49.35			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

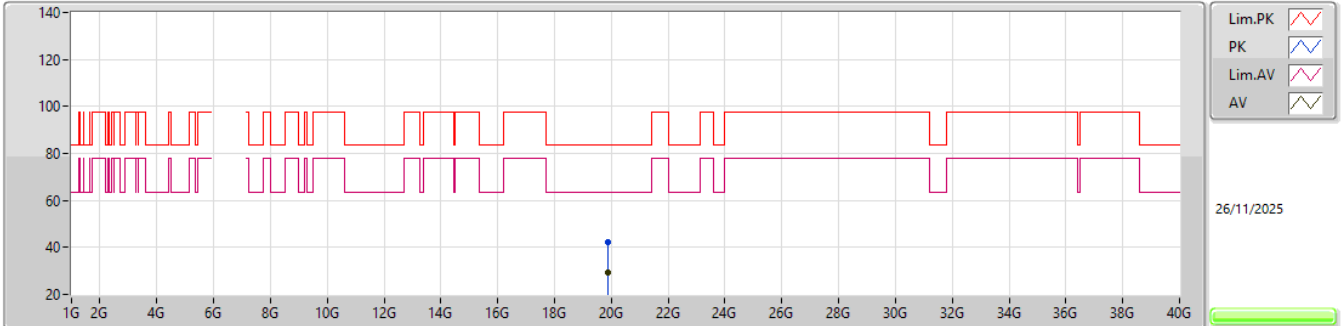


EUT_Y_4TX
Setting 60
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87207G	42.15	83.54	-41.39	36.54	1	Horizontal	119	2.52	-	37.66	17.30	49.35			
AV	19.8702G	29.48	63.54	-34.06	23.88	1	Horizontal	119	2.52	-	37.66	17.29	49.35			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

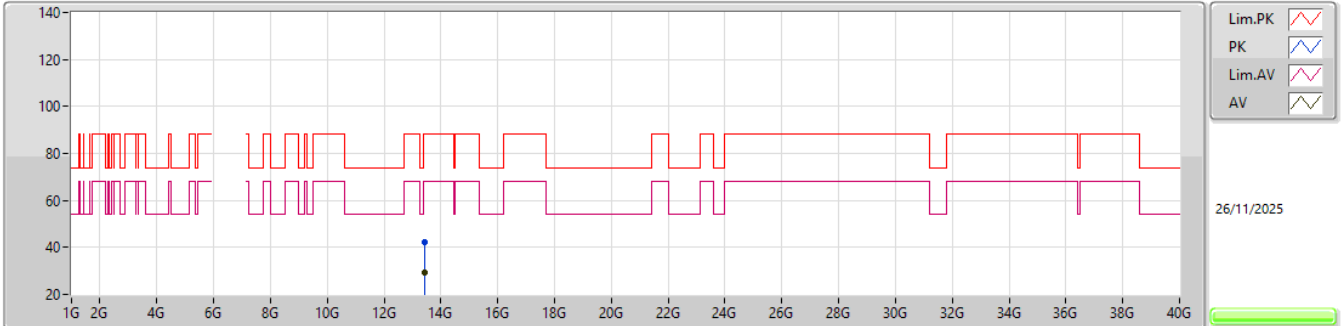


EUT_V_4TX
Setting 62
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41036G	42.04	88.20	-46.16	54.82	3	Vertical	168	2.43	-	40.10	11.96	64.84			
RMS	13.42164G	29.28	68.20	-38.92	42.05	3	Vertical	168	2.43	-	40.10	11.97	64.84			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

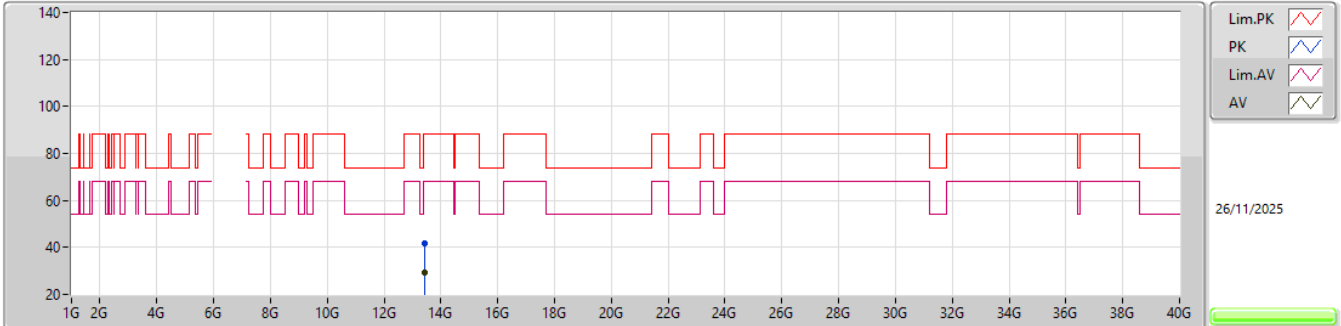


EUT_V_4TX
Setting 62
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.42182G	41.60	88.20	-46.60	54.37	3	Horizontal	166	1.95	-	40.10	11.97	64.84			
RMS	13.42476G	29.24	68.20	-38.96	42.01	3	Horizontal	166	1.95	-	40.10	11.97	64.84			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

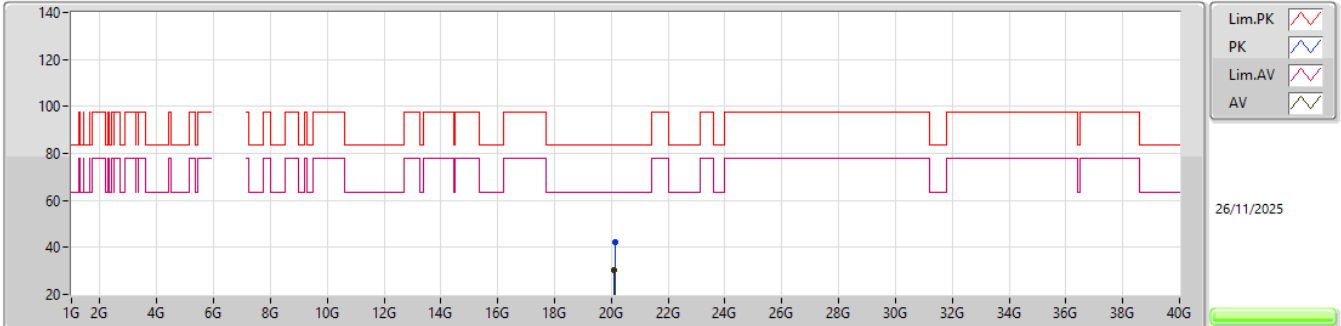


EUT_Y_4TX
Setting 62
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11665G	42.39	83.54	-41.15	36.55	1	Vertical	15	2.61	-	37.70	17.39	49.25			
AV	20.11232G	30.14	63.54	-33.40	24.30	1	Vertical	15	2.61	-	37.70	17.39	49.25			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

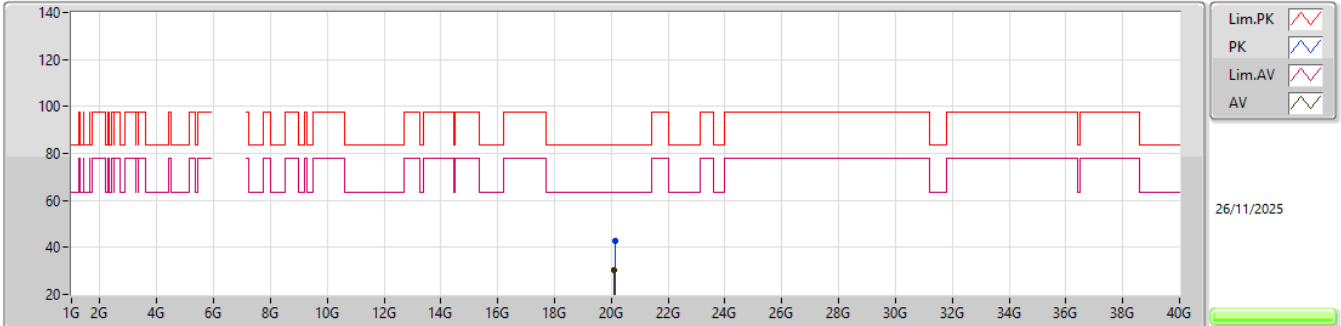


EUT_Y_4TX
Setting 62
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11882G	42.59	83.54	-40.95	36.75	1	Horizontal	31	2.65	-	37.70	17.39	49.25			
AV	20.11062G	30.19	63.54	-33.35	24.35	1	Horizontal	31	2.65	-	37.70	17.39	49.25			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

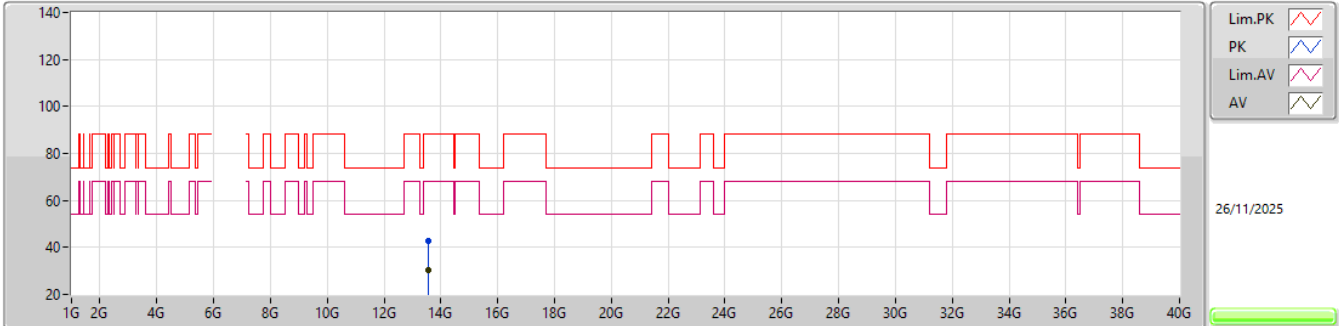


EUT_Y_4TX
Setting 61
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.55788G	42.83	88.20	-45.37	55.12	3	Vertical	151	1.04	-	40.45	12.06	64.80			
RMS	13.55506G	30.60	68.20	-37.60	42.88	3	Vertical	151	1.04	-	40.47	12.05	64.80			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

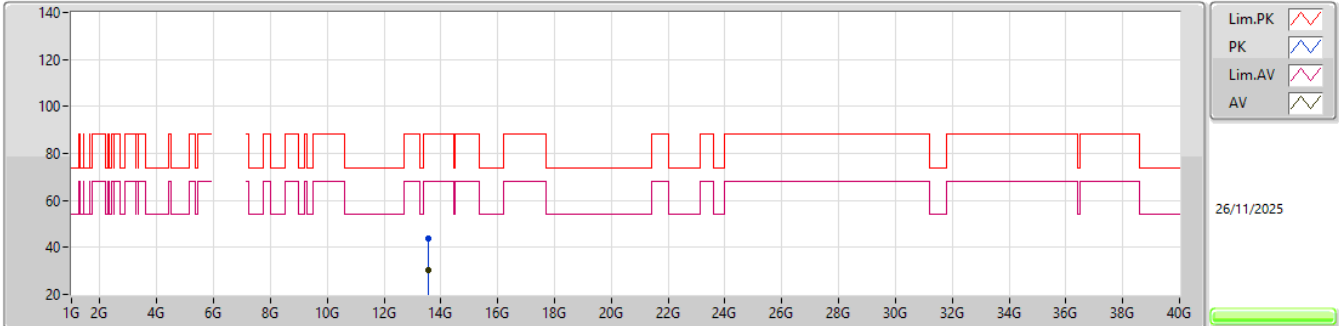


EUT_V_4TX
Setting 61
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.55752G	43.62	88.20	-44.58	55.91	3	Horizontal	317	2.30	-	40.45	12.06	64.80			
RMS	13.55728G	30.41	68.20	-37.79	42.69	3	Horizontal	317	2.30	-	40.46	12.06	64.80			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

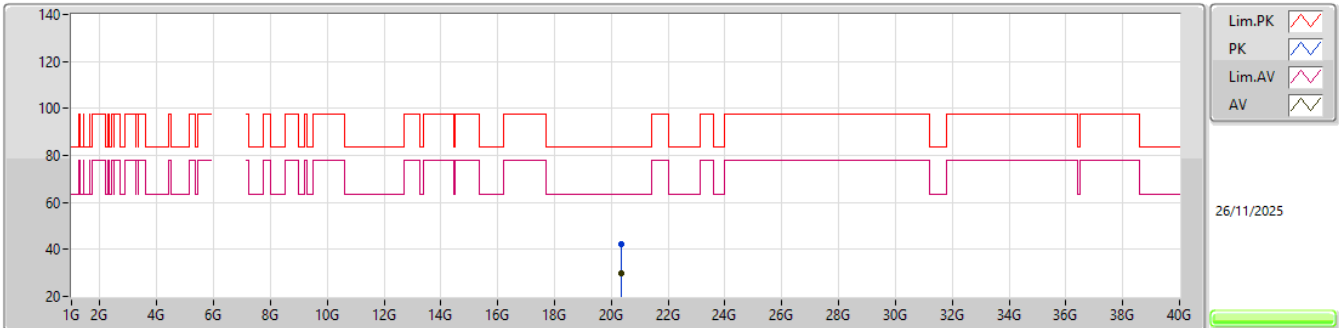


EUT_Y_4TX
Setting 61
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.35805G	42.50	83.54	-41.04	36.55	1	Vertical	195	2.88	-	37.77	17.42	49.24			
AV	20.35042G	30.01	63.54	-33.53	24.03	1	Vertical	195	2.88	-	37.80	17.42	49.24			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

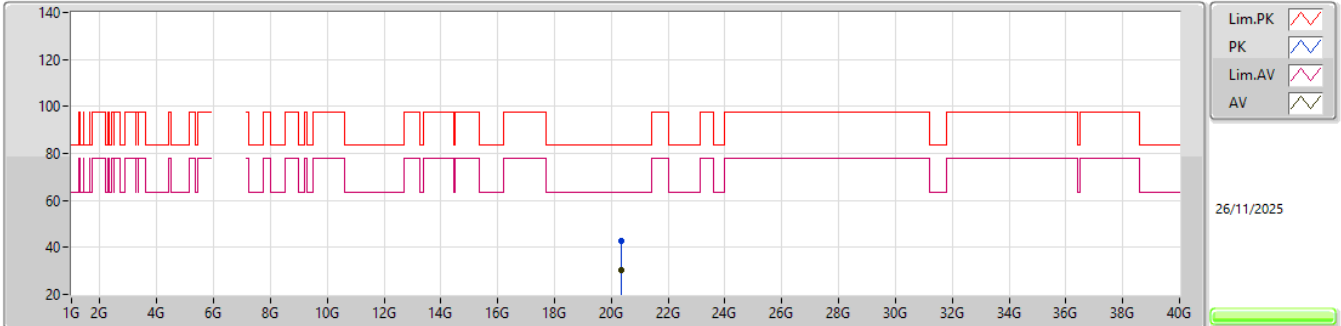


EUT_V_4TX
Setting 61
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.35684G	43.00	83.54	-40.54	37.05	1	Horizontal	285	1.68	-	37.77	17.42	49.24			
AV	20.35023G	30.26	63.54	-33.28	24.28	1	Horizontal	285	1.68	-	37.80	17.42	49.24			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6865MHz_TX

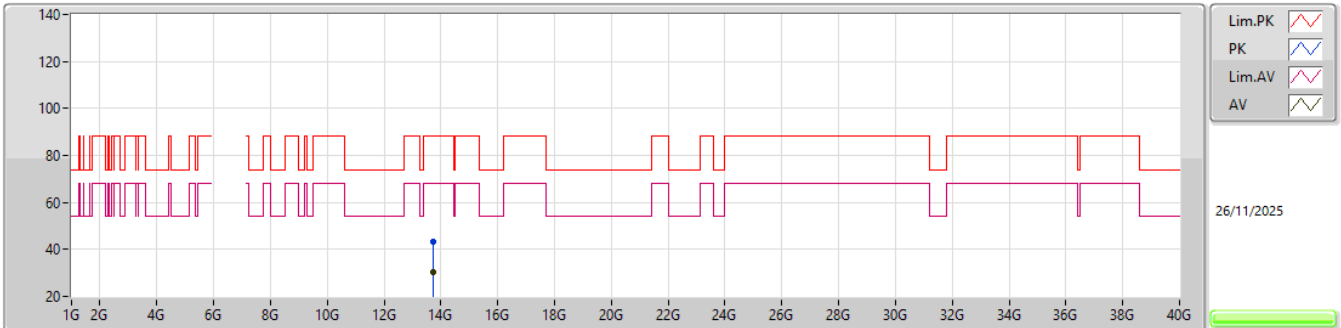


EUT V_4TX
Setting 67
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.73648G	43.39	88.20	-44.81	55.74	3	Vertical	33	2.97	-	40.20	12.17	64.72			
RMS	13.73426G	30.24	68.20	-37.96	42.59	3	Vertical	33	2.97	-	40.20	12.17	64.72			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6865MHz_TX

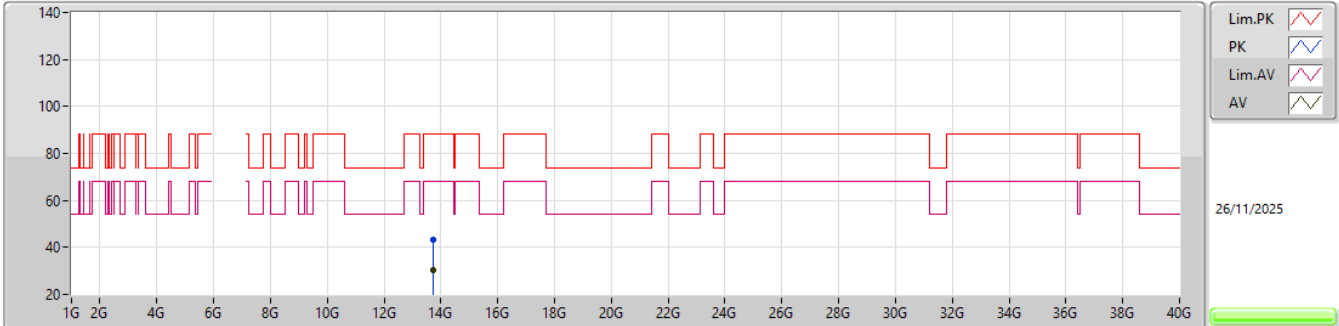


EUT_V_4TX
Setting 67
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.73018G	43.30	88.20	-44.90	55.66	3	Horizontal	245	1.97	-	40.20	12.16	64.72			
RMS	13.74026G	30.29	68.20	-37.91	42.64	3	Horizontal	245	1.97	-	40.20	12.17	64.72			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6865MHz_TX

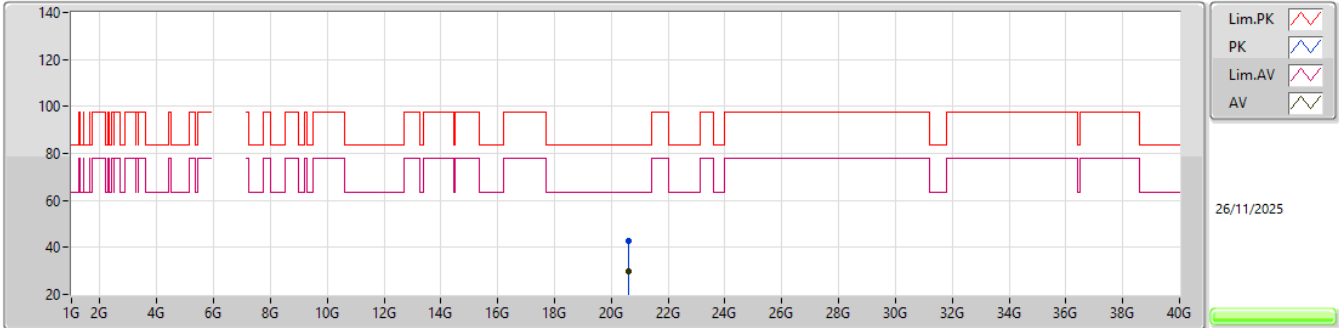


EUT_Y_4TX
Setting 67
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.5905G	42.94	83.54	-40.60	36.89	1	Vertical	274	2.03	-	37.78	17.45	49.18			
AV	20.59118G	29.86	63.54	-33.68	23.81	1	Vertical	274	2.03	-	37.78	17.45	49.18			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6865MHz_TX

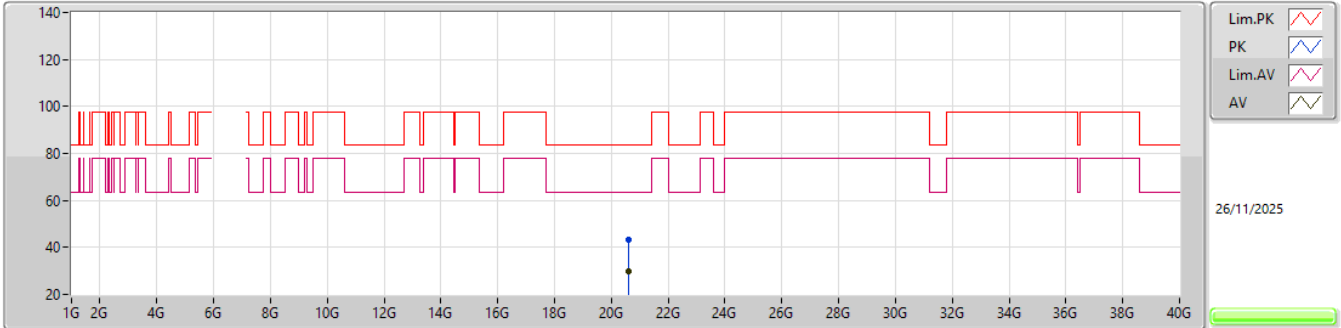


EUT_V_4TX
Setting 67
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	20.5922G	43.39	83.54	-40.15	37.34	1	Horizontal	83	1.32	-	37.78	17.45	49.18				
AV	20.59016G	29.75	63.54	-33.79	23.70	1	Horizontal	83	1.32	-	37.78	17.45	49.18				

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6945MHz_TX

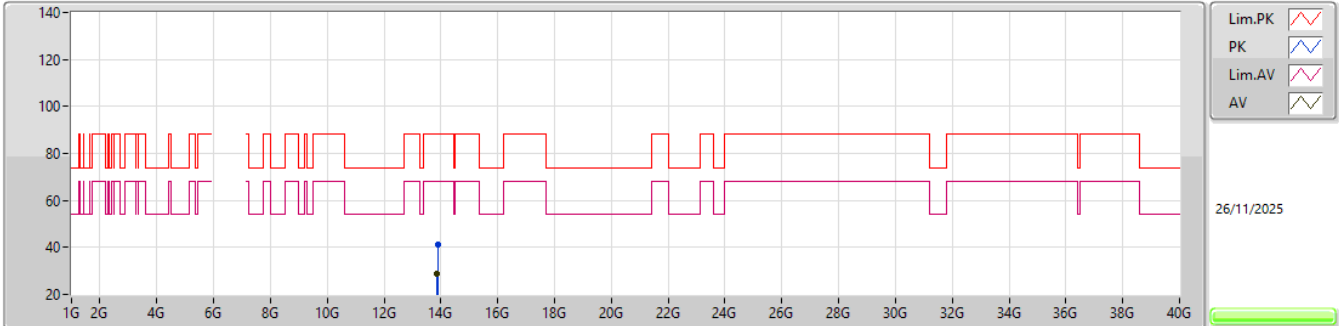


EUT_V_4TX
Setting 63
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.88712G	41.10	88.20	-47.10	53.12	3	Vertical	280	1.77	-	40.37	12.26	64.65			
RMS	13.8783G	28.98	68.20	-39.22	41.03	3	Vertical	280	1.77	-	40.36	12.25	64.66			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6945MHz_TX

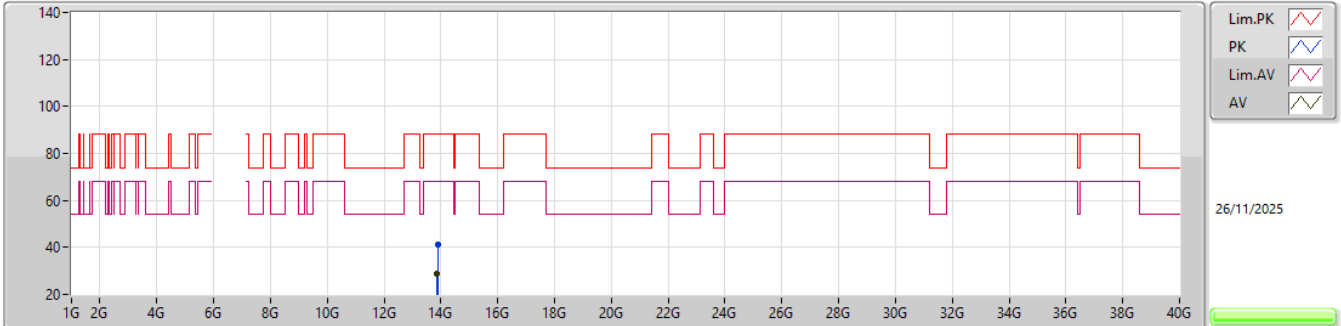


EUT_V_4TX
Setting 63
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	13.88412G	41.31	88.20	-46.89	53.33	3	Horizontal	10	1.99	-	40.37	12.26	64.65				
RMS	13.87596G	28.96	68.20	-39.24	41.02	3	Horizontal	10	1.99	-	40.35	12.25	64.66				

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6945MHz_TX

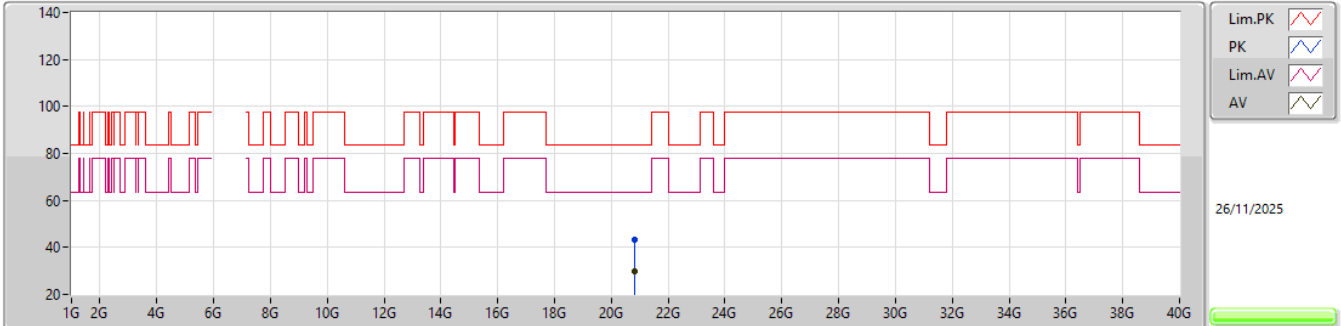


EUT_Y_4TX
Setting 63
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.83593G	43.04	83.54	-40.50	36.77	1	Vertical	41	2.23	-	37.84	17.49	49.06			
AV	20.83231G	29.91	63.54	-33.63	23.65	1	Vertical	41	2.23	-	37.83	17.49	49.06			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6945MHz_TX

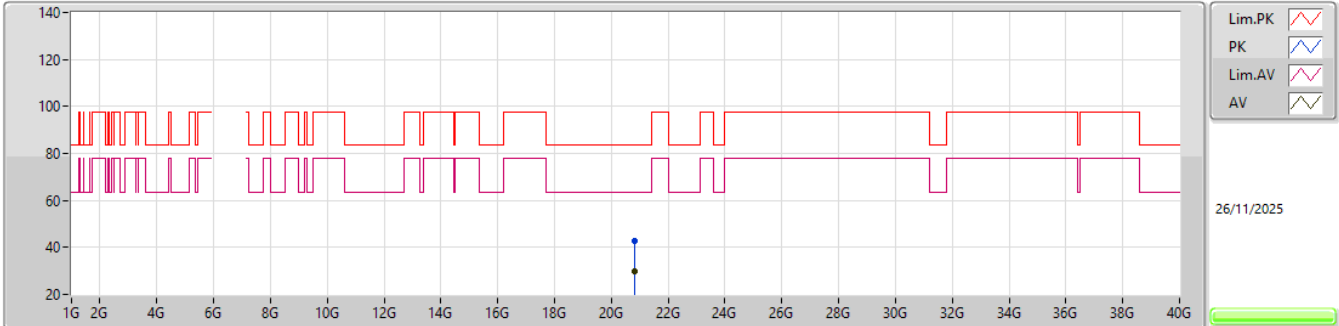


EUT_V_4TX
Setting 63
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.83929G	42.58	83.54	-40.96	36.28	1	Horizontal	213	1.52	-	37.86	17.49	49.05			
AV	20.8304G	29.94	63.54	-33.60	23.69	1	Horizontal	213	1.52	-	37.82	17.49	49.06			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


7025MHz_TX

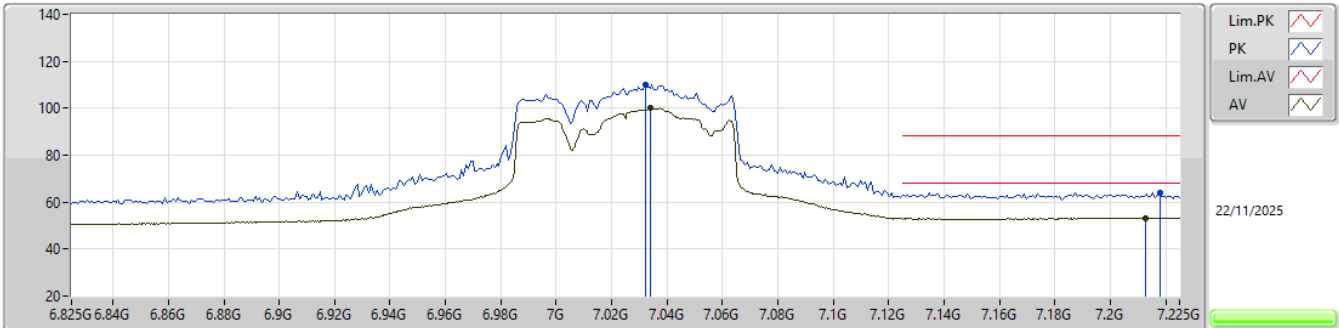EUT_Y_4TX
Setting 67
06-U-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0322G	109.98	Inf	-Inf	99.48	3	Vertical	305	1.96	-	35.49	8.42	33.41			
RMS	7.0342G	99.95	Inf	-Inf	89.43	3	Vertical	305	1.96	-	35.51	8.43	33.42			
PK	7.2178G	64.14	88.20	-24.06	52.80	3	Vertical	305	1.96	-	36.34	8.50	33.50			
RMS	7.2126G	53.30	68.20	-14.90	41.98	3	Vertical	305	1.96	-	36.33	8.48	33.49			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

7025MHz_TX

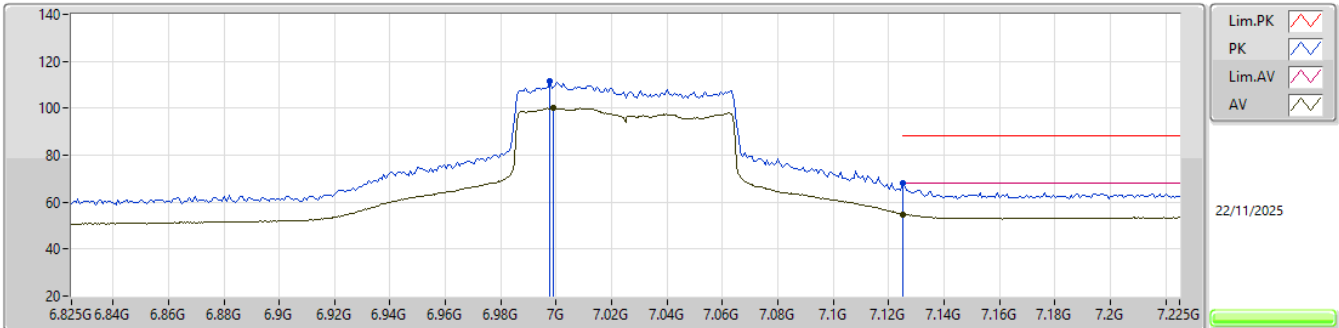


EUT_Y_4TX
Setting 67
06-U-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	6.9978G	111.42	Inf	-Inf	101.10	3	Horizontal	285	2.95	-	35.30	8.42	33.40
RMS	6.999G	99.98	Inf	-Inf	89.66	3	Horizontal	285	2.95	-	35.30	8.42	33.40
PK	7.125G	68.08	88.20	-20.12	56.99	3	Horizontal	285	2.95	-	36.10	8.44	33.45
RMS	7.125G	54.89	68.20	-13.31	43.80	3	Horizontal	285	2.95	-	36.10	8.44	33.45

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

7025MHz_TX

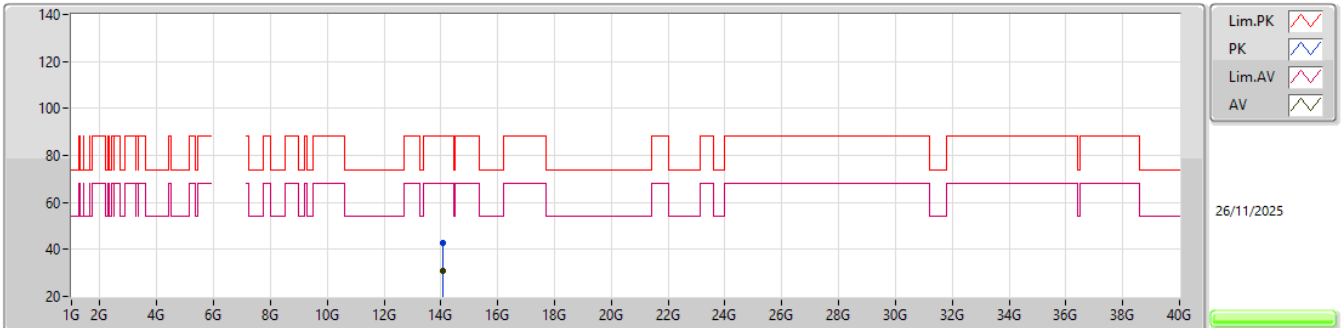


EUT_V_4TX
Setting 67
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.06482G	42.72	88.20	-45.48	54.17	3	Vertical	151	2.99	-	40.73	12.38	64.56			
RMS	14.0641G	30.88	68.20	-37.32	42.33	3	Vertical	151	2.99	-	40.73	12.38	64.56			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

7025MHz_TX

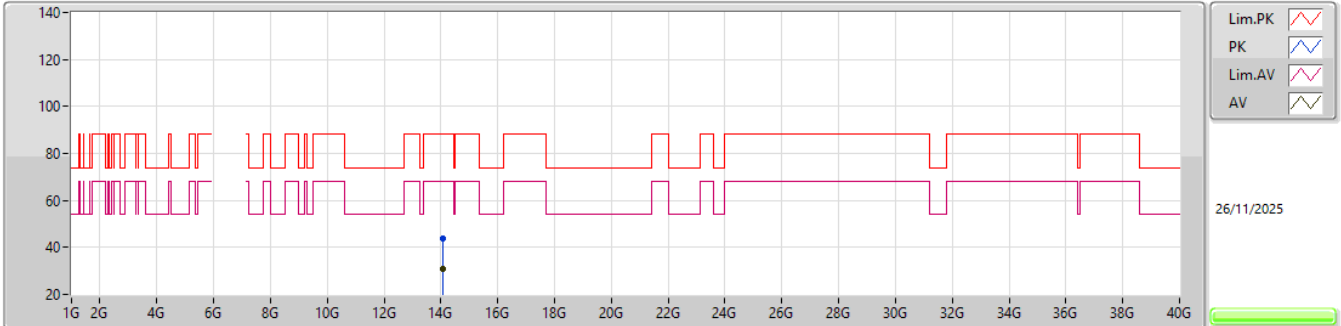


EUT_V_4TX
Setting 67
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.06242G	44.00	88.20	-44.20	55.46	3	Horizontal	55	2.88	-	40.72	12.38	64.56			
RMS	14.06386G	30.82	68.20	-37.38	42.27	3	Horizontal	55	2.88	-	40.73	12.38	64.56			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

7025MHz_TX

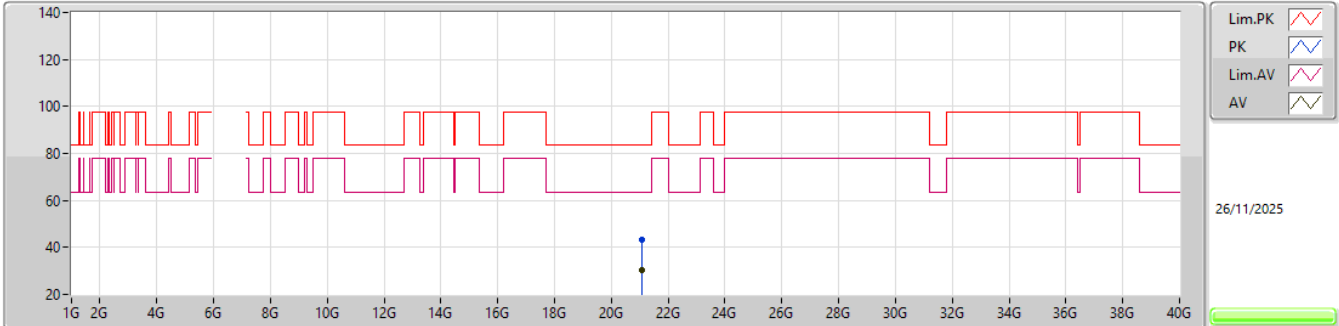


EUT_V_4TX
Setting 67
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.0721G	43.21	83.54	-40.33	36.66	1	Vertical	6	2.86	-	37.95	17.54	48.94			
AV	21.0721G	30.47	63.54	-33.07	23.91	1	Vertical	6	2.86	-	37.96	17.54	48.94			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

7025MHz_TX

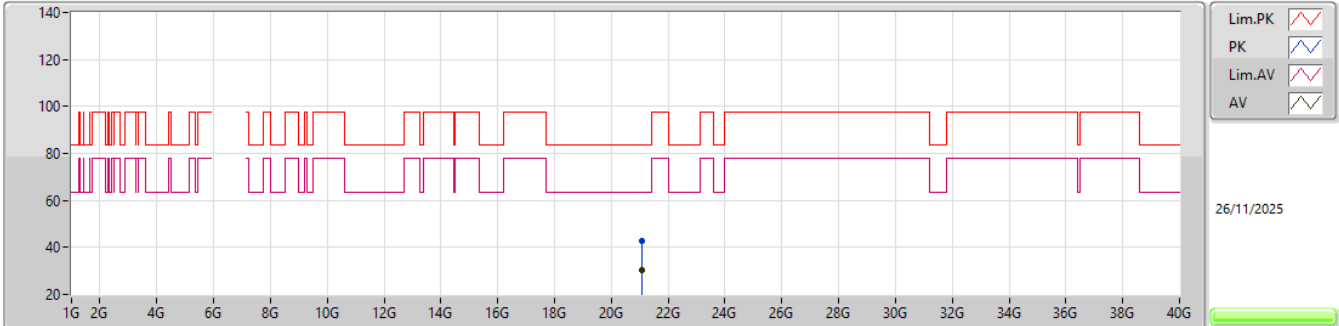


EUT_V_4TX
Setting 67
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.07937G	43.00	83.54	-40.54	36.46	1	Horizontal	149	2.75	-	37.94	17.54	48.94			
AV	21.07587G	30.53	63.54	-33.01	23.98	1	Horizontal	149	2.75	-	37.95	17.54	48.94			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

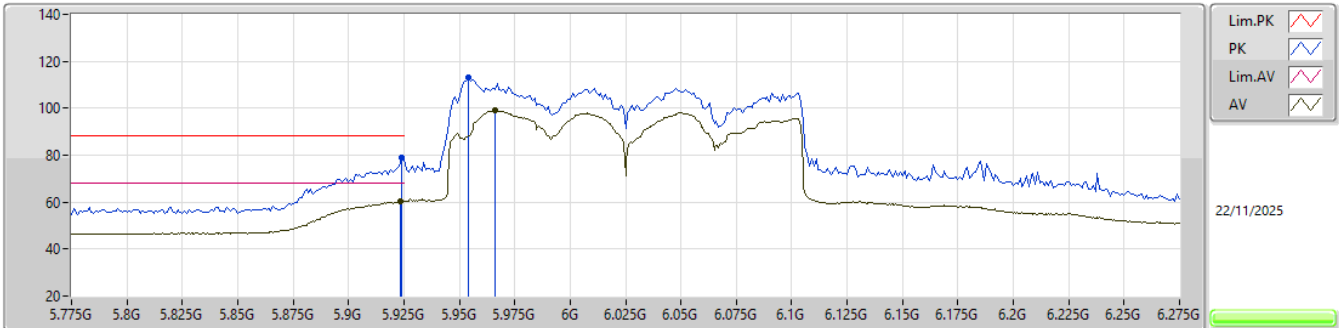


EUT_Y_4TX
Setting 67
06-U-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.924G	78.94	88.20	-9.26	72.88	3	Vertical	48	1.78	-	32.25	7.57	33.76			
RMS	5.9235G	60.51	68.20	-7.69	54.45	3	Vertical	48	1.78	-	32.25	7.57	33.76			
PK	5.954G	112.90	Inf	-Inf	106.72	3	Vertical	48	1.78	-	32.31	7.63	33.76			
RMS	5.966G	99.06	Inf	-Inf	92.83	3	Vertical	48	1.78	-	32.33	7.65	33.75			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

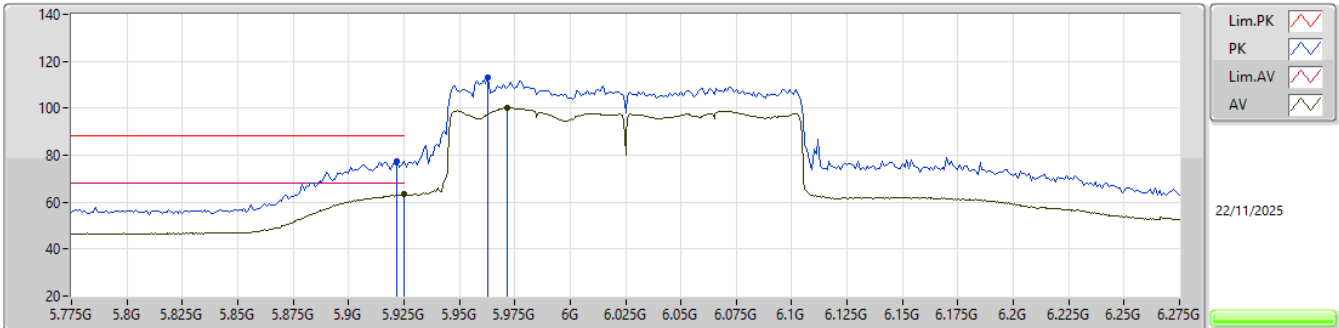


EUT_Y_4TX
Setting 67
06-U-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.922G	77.45	88.20	-10.75	71.40	3	Horizontal	274	1.95	-	32.24	7.57	33.76				
RMS	5.925G	63.22	68.20	-4.98	57.15	3	Horizontal	274	1.95	-	32.25	7.58	33.76				
PK	5.963G	113.16	Inf	-Inf	106.94	3	Horizontal	274	1.95	-	32.33	7.64	33.75				
RMS	5.9715G	100.35	Inf	-Inf	94.10	3	Horizontal	274	1.95	-	32.34	7.66	33.75				

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

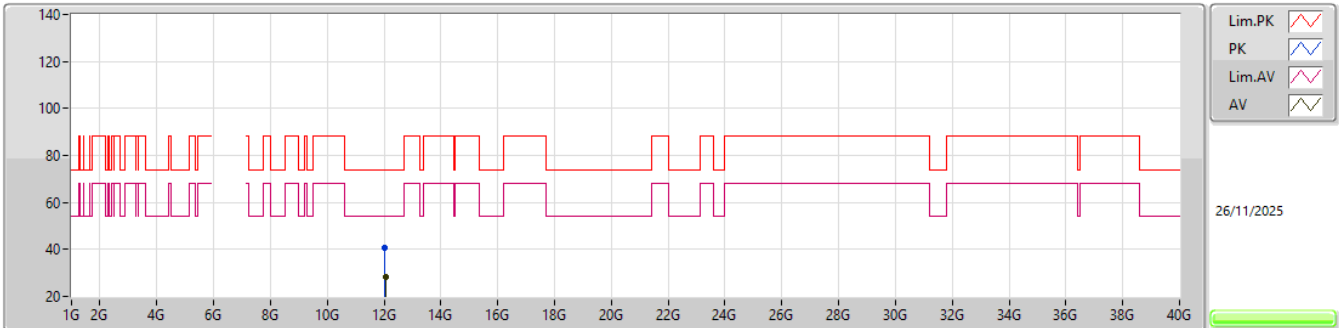


EUT_V_4TX
Setting 67
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.03572G	40.61	74.00	-33.39	56.17	3	Vertical	186	2.11	-	39.07	11.11	65.74			
AV	12.0578G	28.38	54.00	-25.62	43.85	3	Vertical	186	2.11	-	39.13	11.13	65.73			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

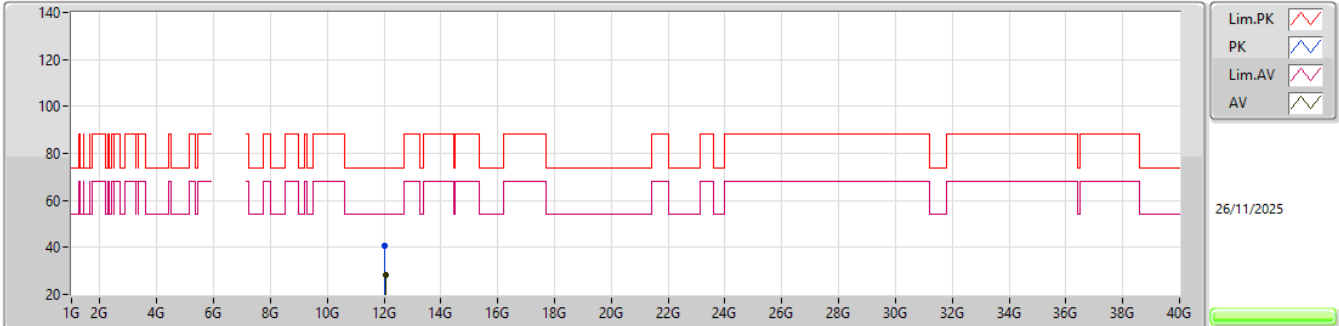


EUT_V_4TX
Setting 67
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.03632G	40.70	74.00	-33.30	56.26	3	Horizontal	281	2.56	-	39.07	11.11	65.74			
AV	12.05378G	28.36	54.00	-25.64	43.85	3	Horizontal	281	2.56	-	39.12	11.12	65.73			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

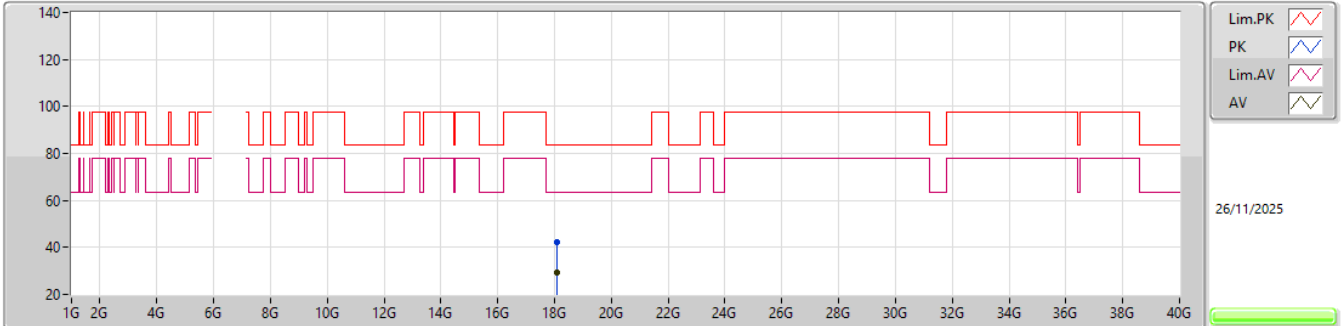


EUT_V_4TX
Setting 67
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07709G	42.17	83.54	-41.37	38.03	1	Vertical	89	2.57	-	37.35	16.32	49.53			
AV	18.07065G	29.20	63.54	-34.34	25.06	1	Vertical	89	2.57	-	37.34	16.32	49.52			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

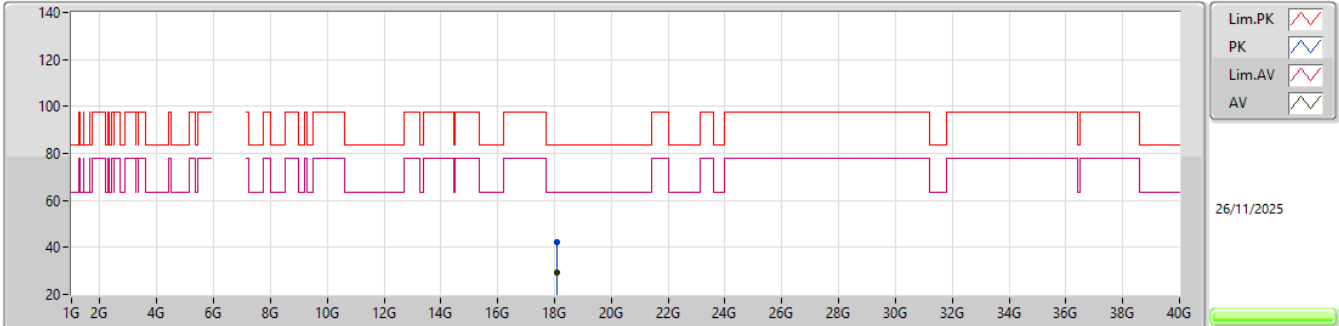


EUT_V_4TX
Setting 67
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07754G	42.31	83.54	-41.23	38.16	1	Horizontal	195	1.71	-	37.36	16.32	49.53			
AV	18.07537G	29.16	63.54	-34.38	25.01	1	Horizontal	195	1.71	-	37.35	16.32	49.52			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

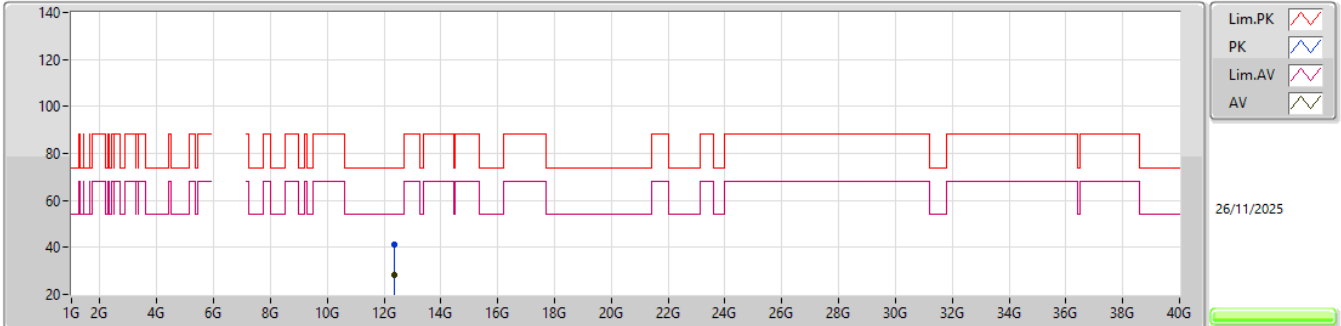


EUT_V_4TX
Setting 73
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38302G	41.16	74.00	-32.84	56.71	3	Vertical	348	1.72	-	38.73	11.33	65.61			
AV	12.3595G	28.39	54.00	-25.61	43.92	3	Vertical	348	1.72	-	38.78	11.31	65.62			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

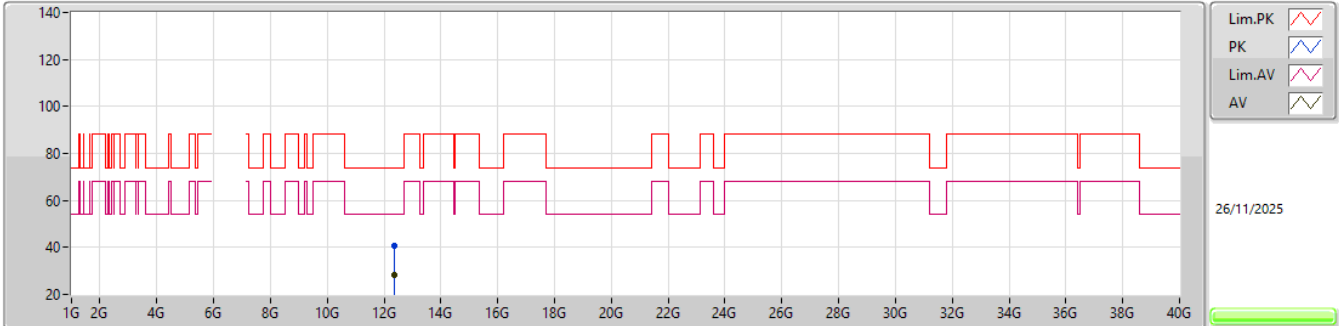


EUT_Y_4TX
Setting 73
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.36562G	40.94	74.00	-33.06	56.47	3	Horizontal	269	1.75	-	38.77	11.32	65.62			
AV	12.35908G	28.43	54.00	-25.57	43.96	3	Horizontal	269	1.75	-	38.78	11.31	65.62			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

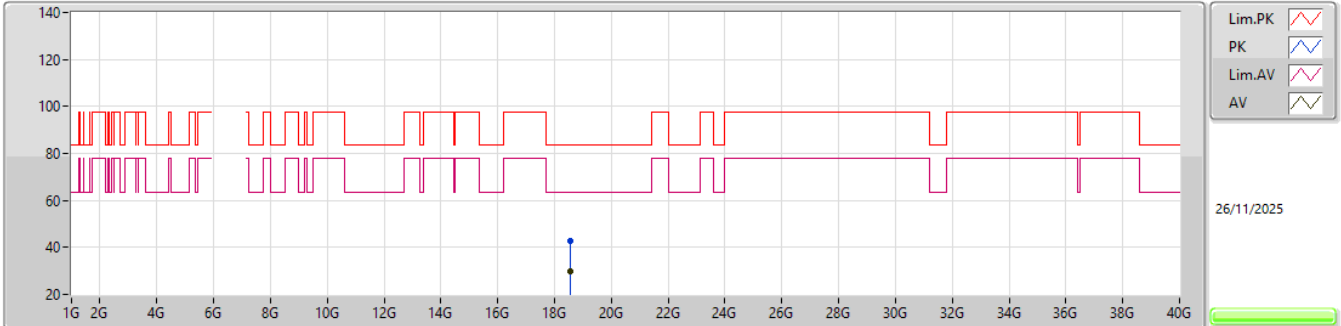


EUT_V_4TX
Setting 73
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.55009G	42.65	83.54	-40.89	38.17	1	Vertical	352	1.73	-	37.60	16.56	49.68			
AV	18.55809G	29.87	63.54	-33.67	25.36	1	Vertical	352	1.73	-	37.62	16.56	49.67			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

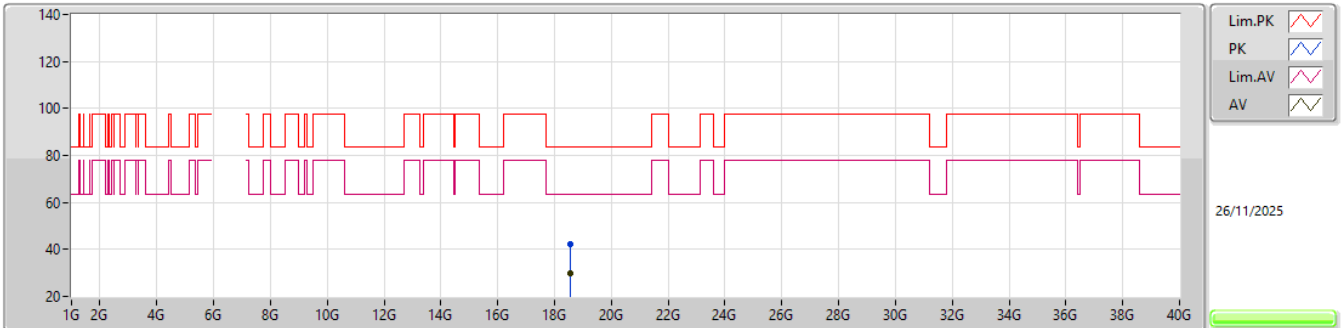


EUT_Y_4TX
Setting 73
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.55423G	42.17	83.54	-41.37	37.68	1	Horizontal	59	2.37	-	37.61	16.56	49.68			
AV	18.55217G	29.94	63.54	-33.60	25.46	1	Horizontal	59	2.37	-	37.60	16.56	49.68			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

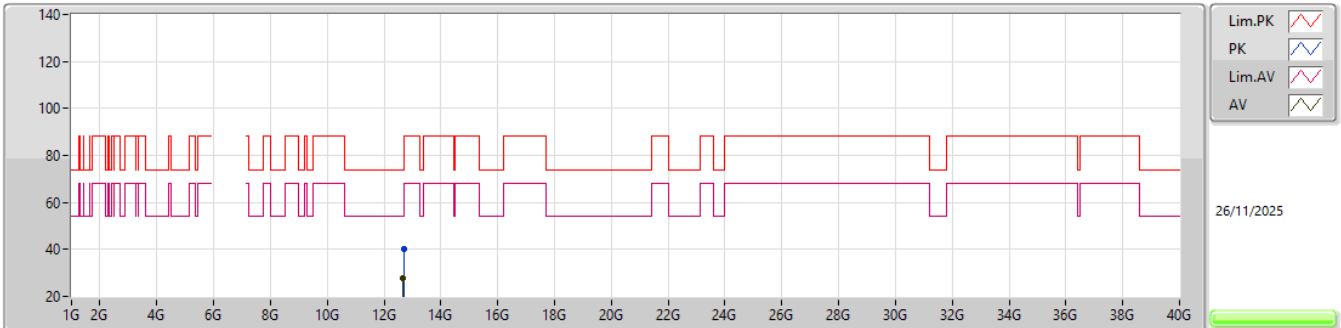


EUT_Y_4TX
Setting 74
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.69648G	40.22	74.00	-33.78	54.91	3	Vertical	160	1.88	-	39.09	11.52	65.30			
AV	12.67536G	27.78	54.00	-26.22	42.55	3	Vertical	160	1.88	-	39.05	11.51	65.33			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

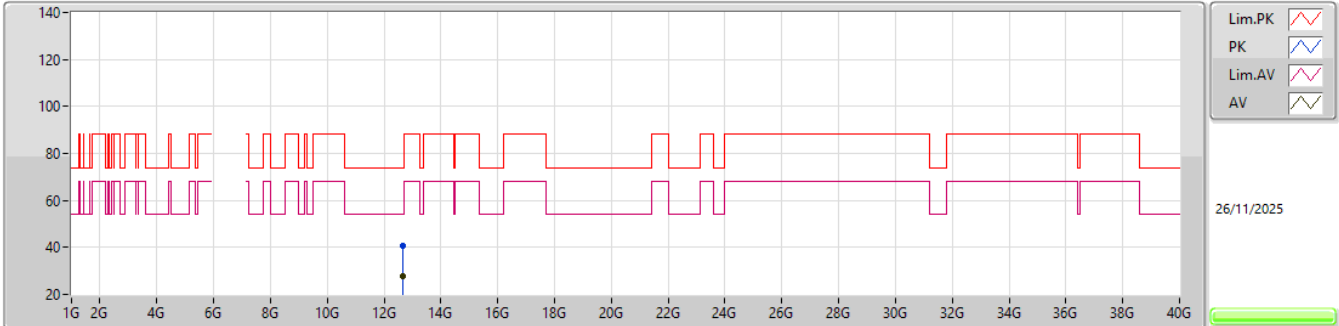


EUT_V_4TX
Setting 74
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.6759G	40.82	74.00	-33.18	55.59	3	Horizontal	18	2.58	-	39.05	11.51	65.33			
AV	12.68028G	27.71	54.00	-26.29	42.46	3	Horizontal	18	2.58	-	39.06	11.51	65.32			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

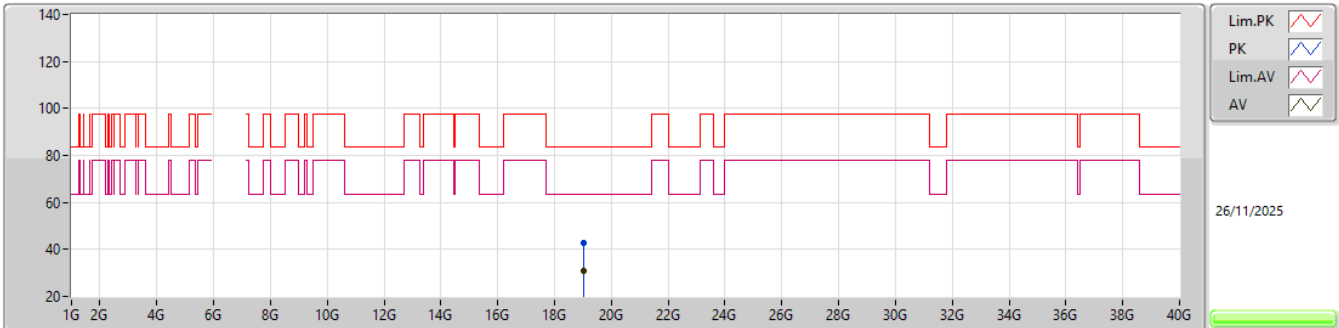


EUT_Y_4TX
Setting 74
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03557G	42.98	83.54	-40.56	37.63	1	Vertical	271	2.96	-	37.87	16.81	49.33			
AV	19.03975G	30.90	63.54	-32.64	25.54	1	Vertical	271	2.96	-	37.88	16.81	49.33			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

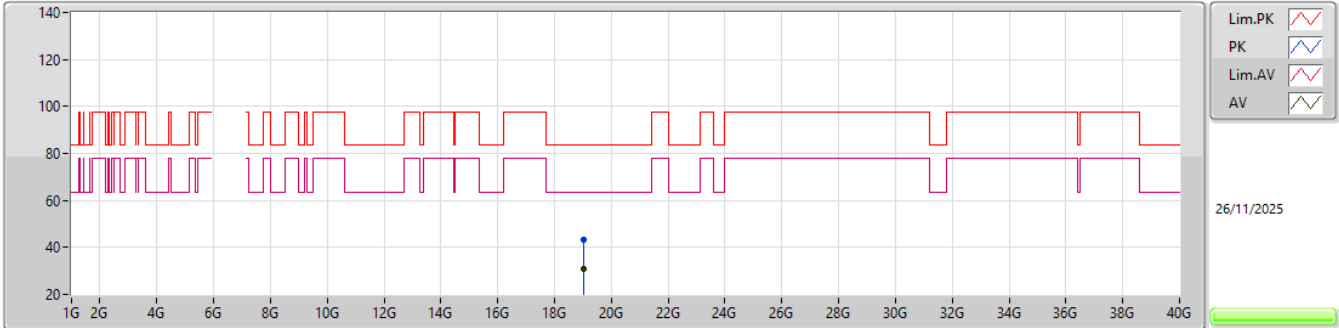


EUT_Y_4TX
Setting 74
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03109G	43.47	83.54	-40.07	38.13	1	Horizontal	161	2.75	-	37.86	16.81	49.33			
AV	19.03802G	30.94	63.54	-32.60	25.58	1	Horizontal	161	2.75	-	37.88	16.81	49.33			

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6505MHz_TX

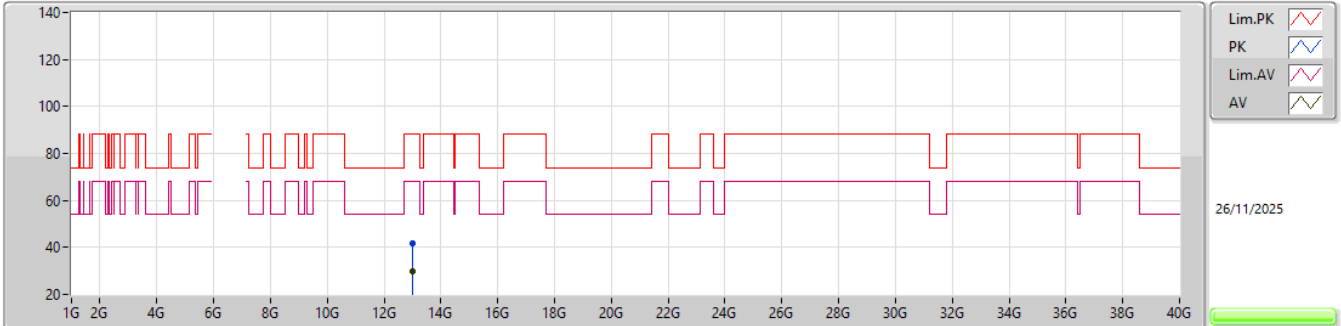


EUT_V_4TX
Setting 74
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.02398G	41.79	88.20	-46.41	55.55	3	Vertical	325	2.45	-	39.40	11.72	64.88			
RMS	13.02422G	29.81	68.20	-38.39	43.56	3	Vertical	325	2.45	-	39.40	11.73	64.88			

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6505MHz_TX

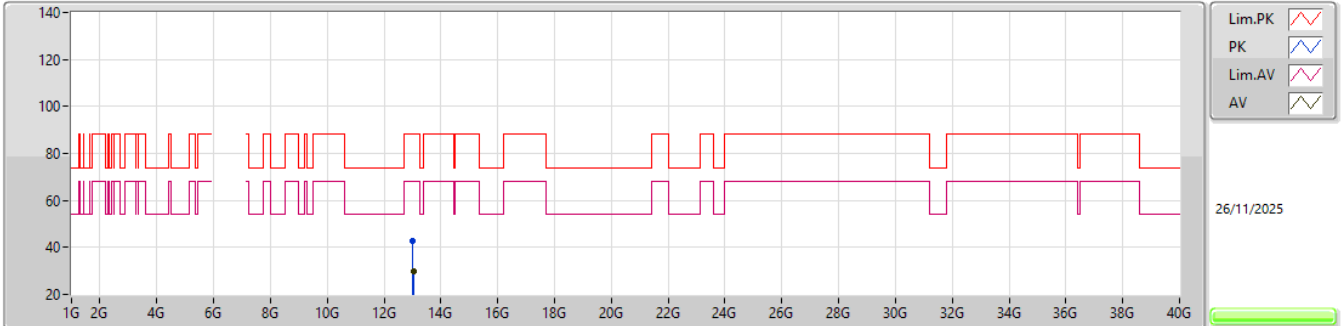


EUT_Y_4TX
Setting 74
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.01228G	42.57	88.20	-45.63	56.28	3	Horizontal	323	2.31	-	39.45	11.72	64.88			
RMS	13.025G	29.90	68.20	-38.30	43.65	3	Horizontal	323	2.31	-	39.40	11.73	64.88			

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX


6505MHz_TX

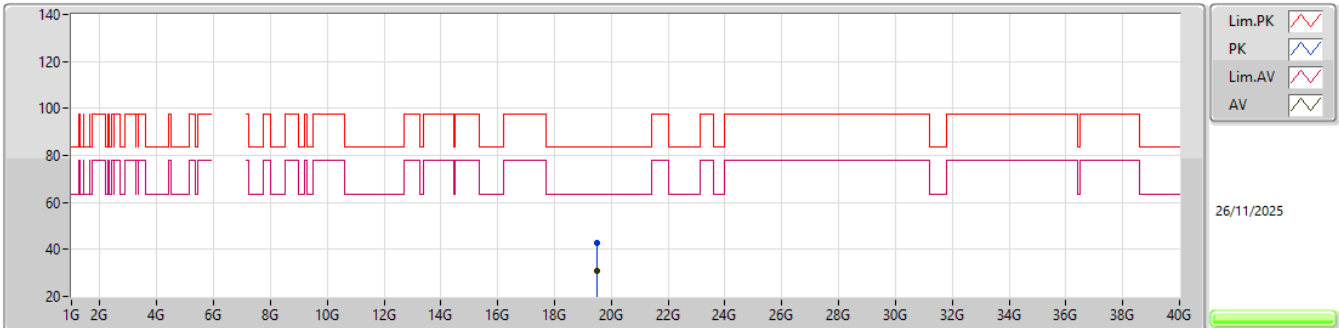
EUT_Y_4TX
Setting 74
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5113G	42.94	83.54	-40.60	37.74	1	Vertical	240	1.66	-	37.70	17.09	49.59			
AV	19.511G	30.64	63.54	-32.90	25.44	1	Vertical	240	1.66	-	37.70	17.09	49.59			

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX


6505MHz_TX

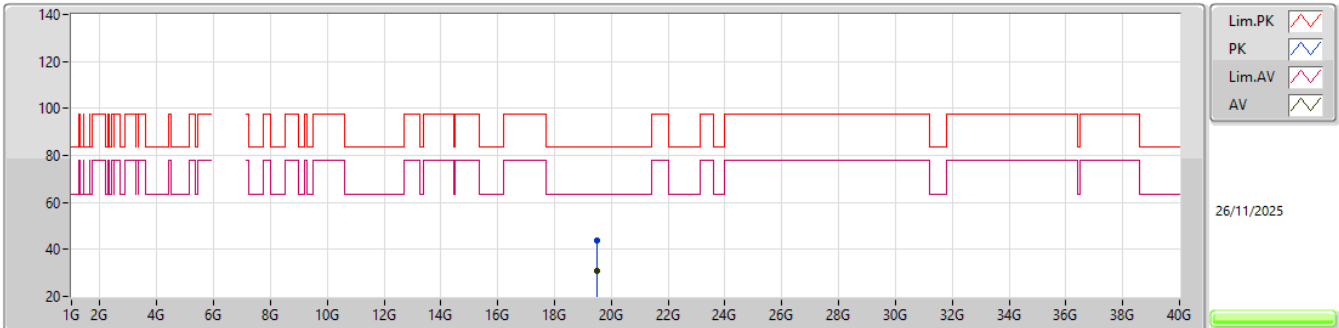EUT_Y_4TX
Setting 74
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.51607G	43.94	83.54	-39.60	38.74	1	Horizontal	305	1.69	-	37.70	17.09	49.59			
AV	19.51057G	30.74	63.54	-32.80	25.54	1	Horizontal	305	1.69	-	37.70	17.09	49.59			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

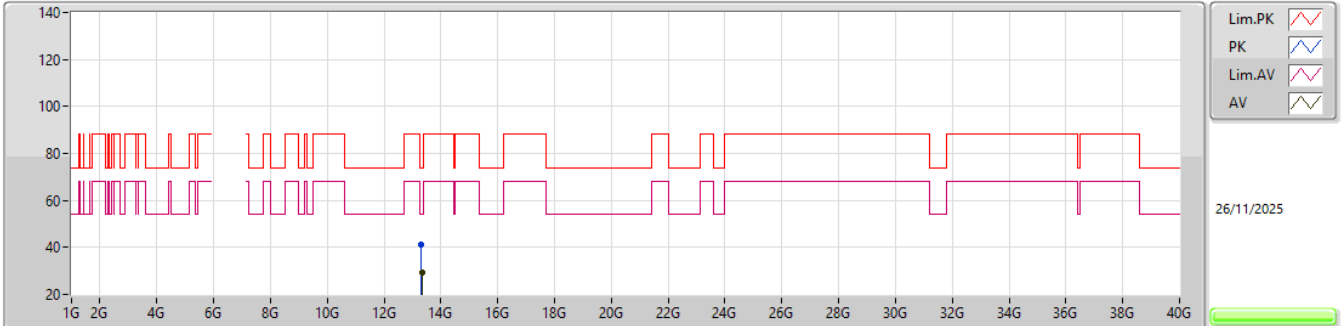


EUT V_4TX
Setting 77
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.32166G	41.42	74.00	-32.58	54.59	3	Vertical	35	1.00	-	39.77	11.91	64.85			
AV	13.3357G	29.22	54.00	-24.78	42.26	3	Vertical	35	1.00	-	39.89	11.92	64.85			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

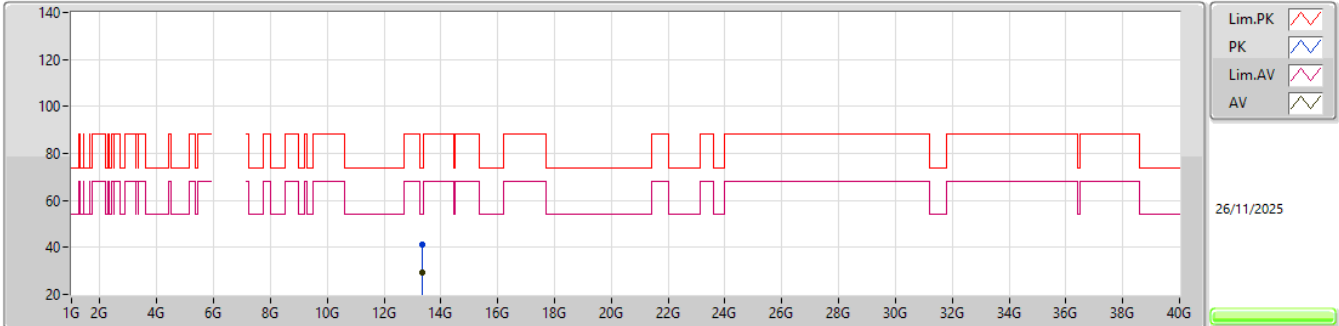


EUT_V_4TX
Setting 77
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.33402G	41.31	74.00	-32.69	54.37	3	Horizontal	217	2.55	-	39.87	11.92	64.85			
AV	13.33564G	29.26	54.00	-24.74	42.30	3	Horizontal	217	2.55	-	39.89	11.92	64.85			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

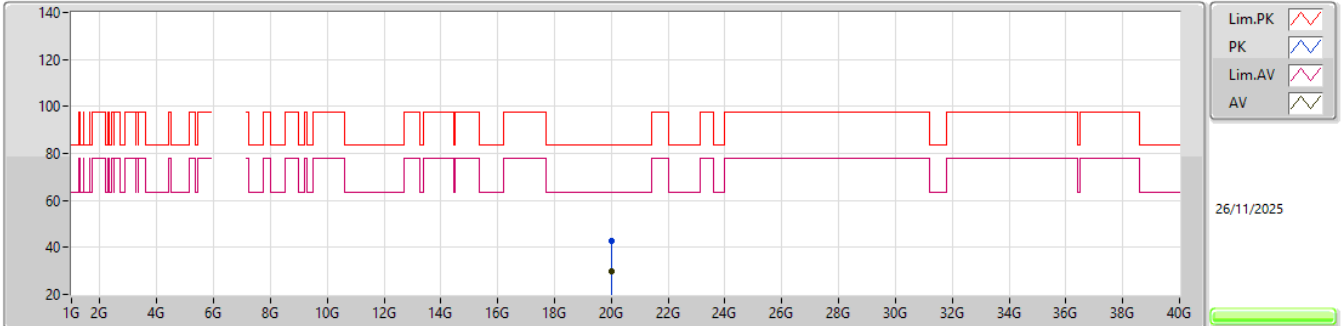


EUT_Y_4TX
Setting 77
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.99559G	42.58	83.54	-40.96	36.68	1	Vertical	233	2.09	-	37.79	17.37	49.26			
AV	19.99005G	29.89	63.54	-33.65	24.02	1	Vertical	233	2.09	-	37.78	17.36	49.27			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

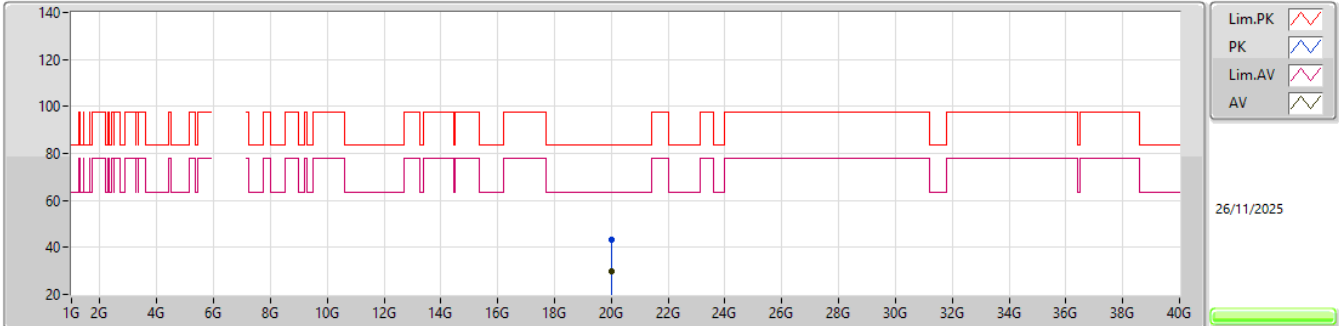


EUT_Y_4TX
Setting 77
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.99213G	43.10	83.54	-40.44	37.22	1	Horizontal	84	1.67	-	37.78	17.37	49.27			
AV	19.99025G	29.86	63.54	-33.68	23.99	1	Horizontal	84	1.67	-	37.78	17.36	49.27			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6825MHz_TX

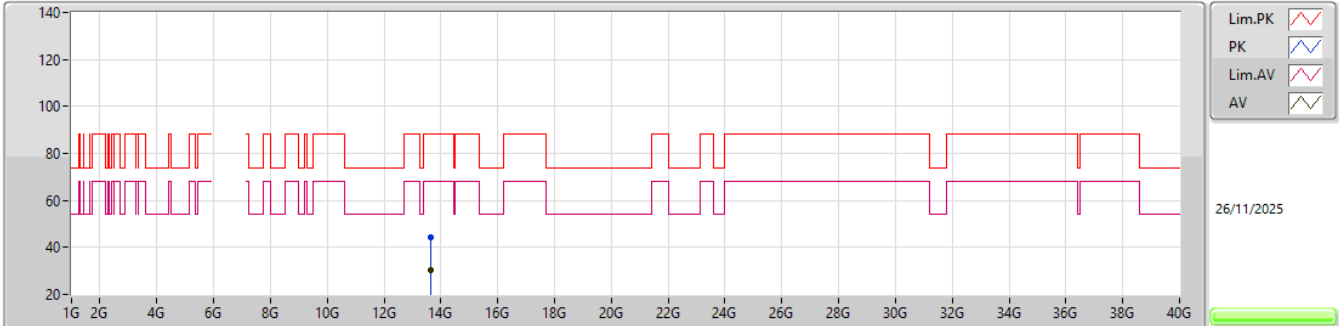


EUT_V_4TX
Setting 79
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.6422G	44.28	88.20	-43.92	56.81	3	Vertical	346	2.24	-	40.12	12.11	64.76			
RMS	13.63698G	30.60	68.20	-37.60	43.14	3	Vertical	346	2.24	-	40.13	12.10	64.77			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6825MHz_TX

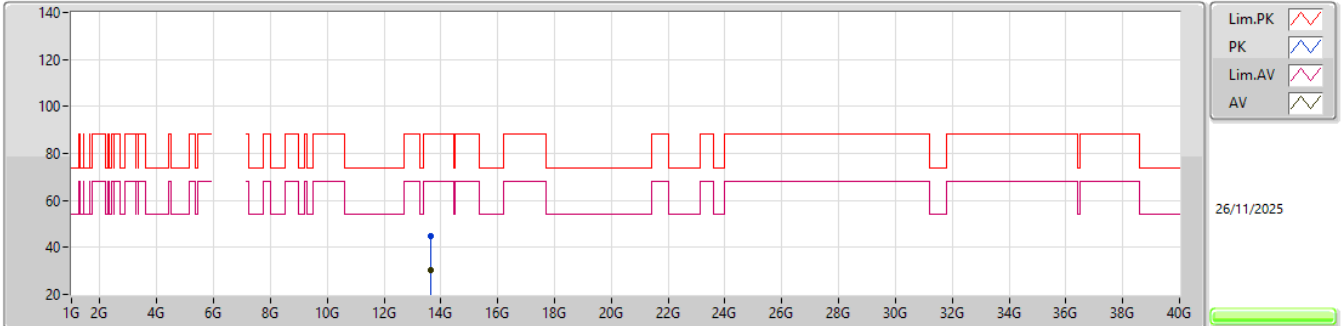


EUT V_4TX
Setting 79
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.63848G	45.02	88.20	-43.18	57.56	3	Horizontal	17	1.79	-	40.12	12.11	64.77			
RMS	13.63866G	30.49	68.20	-37.71	43.03	3	Horizontal	17	1.79	-	40.12	12.11	64.77			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6825MHz_TX

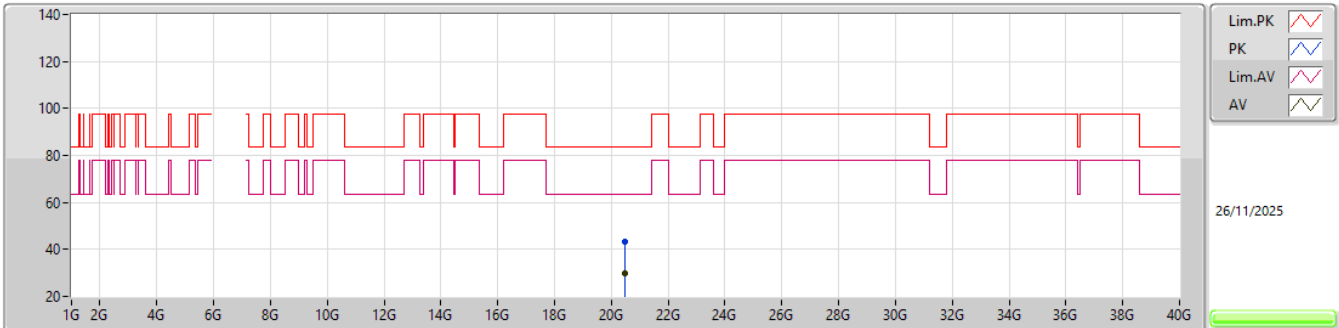


EUT_Y_4TX
Setting 79
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.47466G	43.28	83.54	-40.26	37.32	1	Vertical	280	1.83	-	37.75	17.44	49.23			
AV	20.47029G	29.71	63.54	-33.83	23.74	1	Vertical	280	1.83	-	37.76	17.44	49.23			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6825MHz_TX

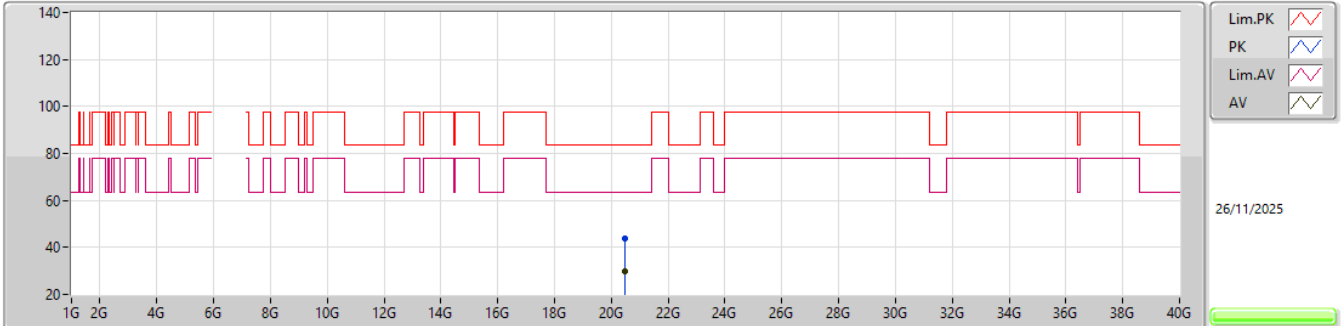


EUT_Y_4TX
Setting 79
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.47423G	43.95	83.54	-39.59	37.99	1	Horizontal	350	1.32	-	37.75	17.44	49.23			
AV	20.47143G	29.74	63.54	-33.80	23.77	1	Horizontal	350	1.32	-	37.76	17.44	49.23			

6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6985MHz_TX

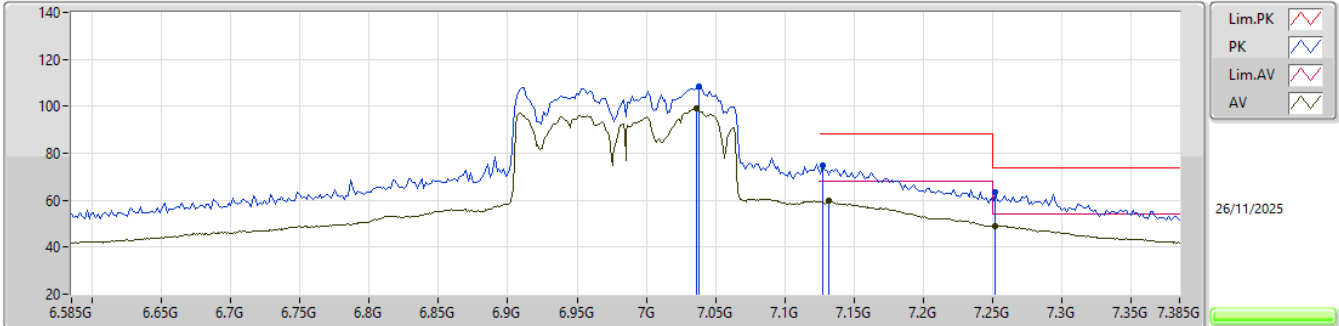


EUT_Y_4TX
Setting 73
06-U-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0378G	108.24	Inf	-Inf	97.70	3	Vertical	296	2.00	-	35.53	8.43	33.42			
RMS	7.0362G	99.04	Inf	-Inf	88.51	3	Vertical	296	2.00	-	35.52	8.43	33.42			
PK	7.1274G	74.95	88.20	-13.25	63.86	3	Vertical	296	2.00	-	36.11	8.44	33.46			
RMS	7.1314G	59.58	68.20	-8.62	48.47	3	Vertical	296	2.00	-	36.13	8.44	33.46			
PK	7.2522G	63.20	74.00	-10.80	51.71	3	Vertical	296	2.00	-	36.41	8.59	33.51			
AV	7.2522G	49.16	54.00	-4.84	37.67	3	Vertical	296	2.00	-	36.41	8.59	33.51			

6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6985MHz_TX

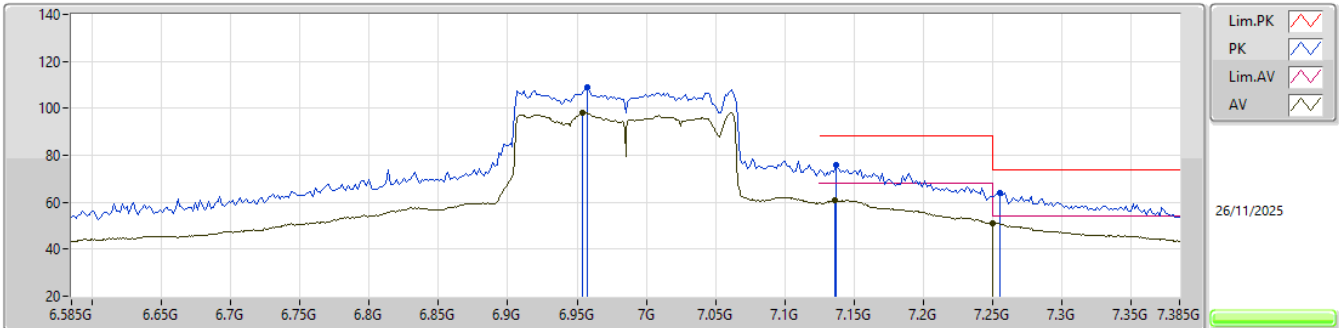


EUT_Y_4TX
Setting 73
06-U-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	6.9578G	108.91	Inf	-Inf	98.74	3	Horizontal	295	3.00	-	35.22	8.35	33.40
RMS	6.9538G	98.18	Inf	-Inf	88.02	3	Horizontal	295	3.00	-	35.21	8.35	33.40
PK	7.137G	75.95	88.20	-12.25	64.82	3	Horizontal	295	3.00	-	36.15	8.44	33.46
RMS	7.1362G	60.96	68.20	-7.24	49.84	3	Horizontal	295	3.00	-	36.14	8.44	33.46
PK	7.2554G	64.15	74.00	-9.85	52.64	3	Horizontal	295	3.00	-	36.42	8.60	33.51
AV	7.25G	51.05	54.00	-2.95	39.58	3	Horizontal	295	3.00	-	36.40	8.58	33.51

6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6985MHz_TX

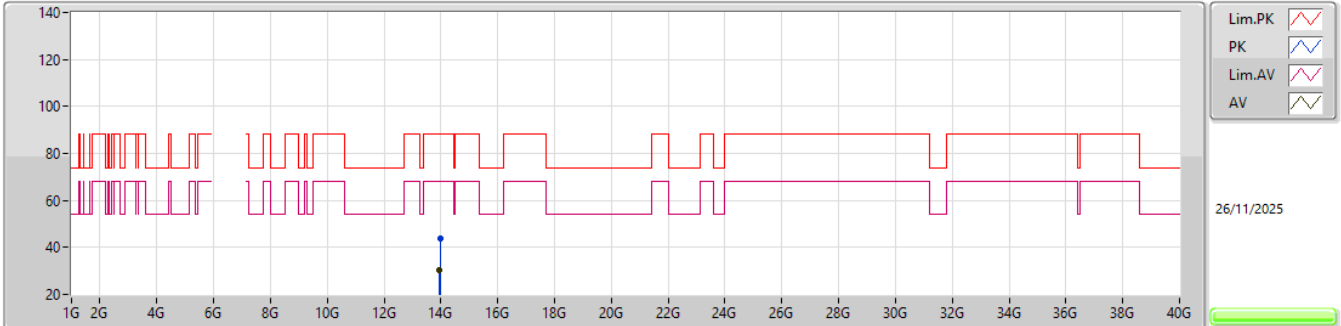


EUT_V_4TX
Setting 73
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	13.96532G	43.54	88.20	-44.66	55.42	3	Vertical	166	2.57	-	40.43	12.31	64.62				
RMS	13.95962G	30.32	68.20	-37.88	42.22	3	Vertical	166	2.57	-	40.42	12.30	64.62				

6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6985MHz_TX

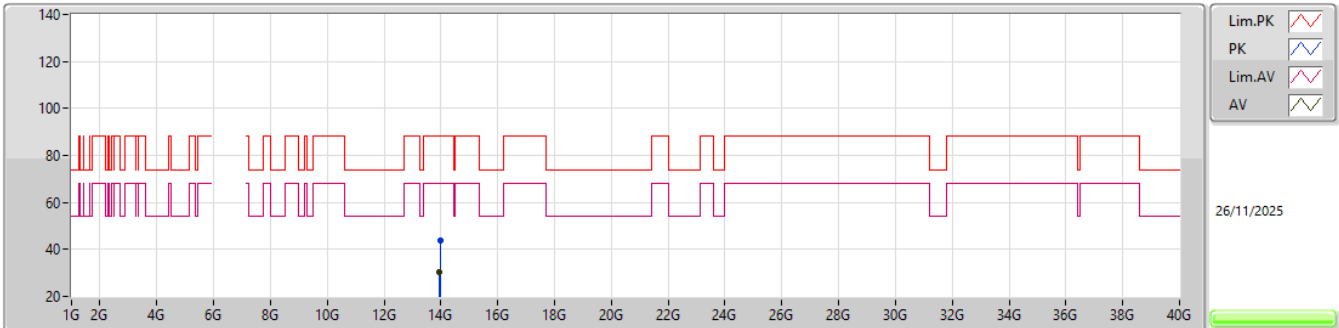


EUT_V_4TX
Setting 73
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.9667G	43.75	88.20	-44.45	55.63	3	Horizontal	46	2.54	-	40.43	12.31	64.62			
RMS	13.95836G	30.28	68.20	-37.92	42.18	3	Horizontal	46	2.54	-	40.42	12.30	64.62			

6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6985MHz_TX

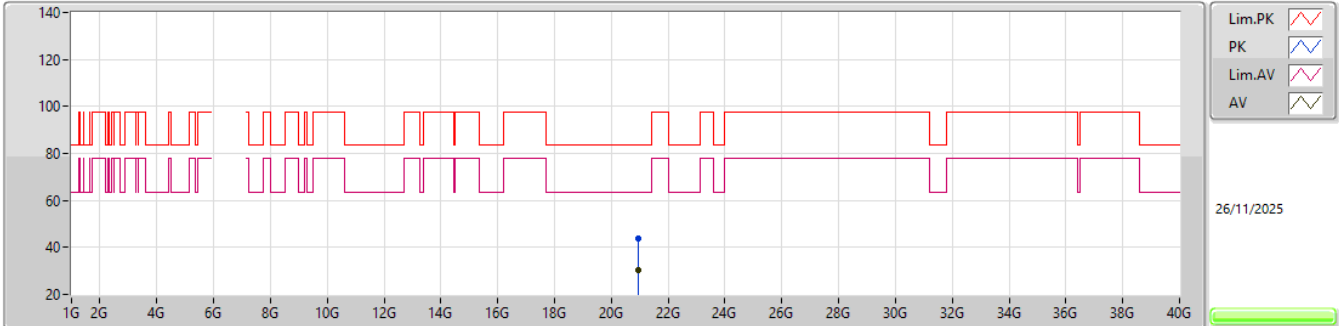


EUT_Y_4TX
Setting 73
06-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.9523G	43.57	83.54	-39.97	37.16	1	Vertical	241	2.62	-	37.90	17.50	48.99			
AV	20.95022G	30.19	63.54	-33.35	23.79	1	Vertical	241	2.62	-	37.90	17.50	49.00			

6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6985MHz_TX

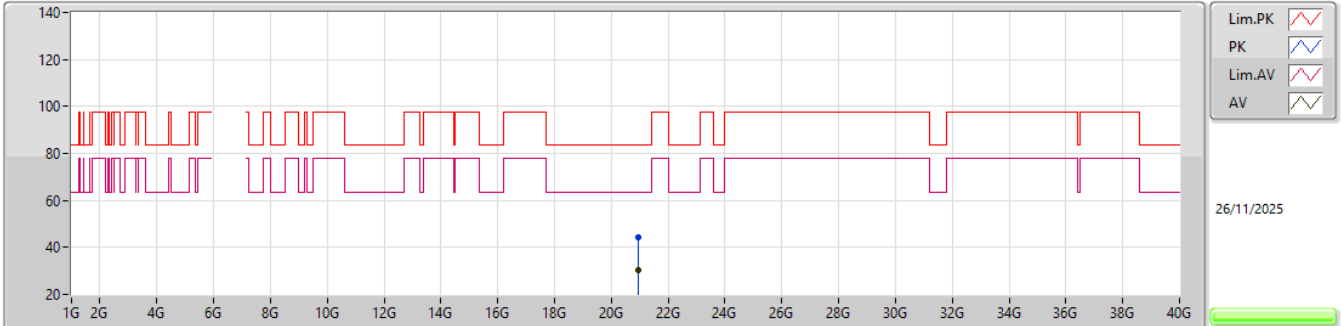


EUT_Y_4TX
Setting 73
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.95462G	44.11	83.54	-39.43	37.69	1	Horizontal	130	1.19	-	37.91	17.50	48.99			
AV	20.95G	30.12	63.54	-33.42	23.72	1	Horizontal	130	1.19	-	37.90	17.50	49.00			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

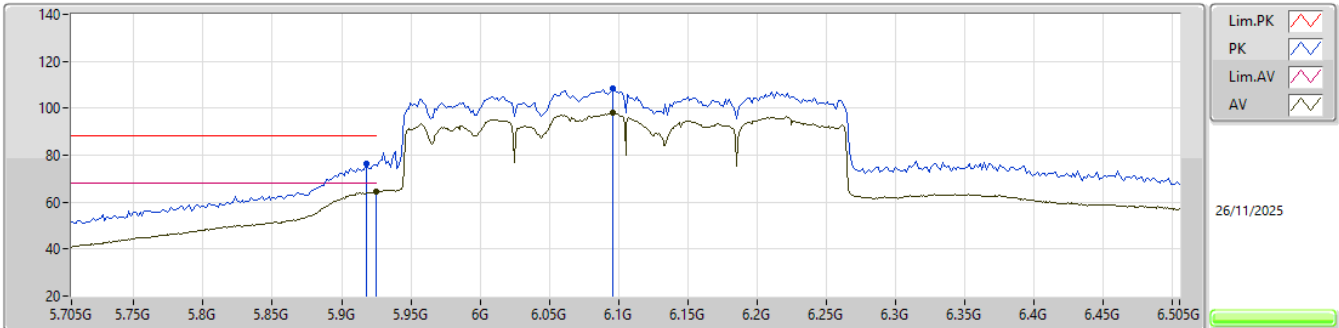


EUT_Y_4TX
Setting 82
06-U-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9178G	76.33	88.20	-11.87	70.29	3	Vertical	307	3.00	-	32.24	7.56	33.76			
RMS	5.925G	64.60	68.20	-3.60	58.53	3	Vertical	307	3.00	-	32.25	7.58	33.76			
PK	6.0954G	108.20	Inf	-Inf	101.74	3	Vertical	307	3.00	-	32.50	7.65	33.69			
RMS	6.0954G	97.93	Inf	-Inf	91.47	3	Vertical	307	3.00	-	32.50	7.65	33.69			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

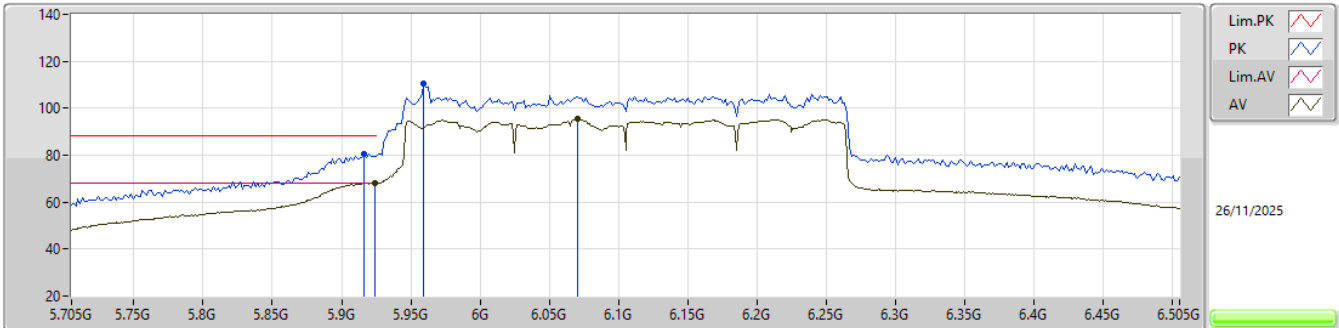


EUT_Y_4TX
Setting 82
06-U-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9162G	80.51	88.20	-7.69	74.48	3	Horizontal	270	2.00	-	32.23	7.56	33.76			
RMS	5.9242G	68.15	68.20	-0.05	62.09	3	Horizontal	270	2.00	-	32.25	7.57	33.76			
PK	5.9594G	110.33	Inf	-Inf	104.12	3	Horizontal	270	2.00	-	32.32	7.64	33.75			
RMS	6.0706G	95.43	Inf	-Inf	88.97	3	Horizontal	270	2.00	-	32.50	7.66	33.70			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

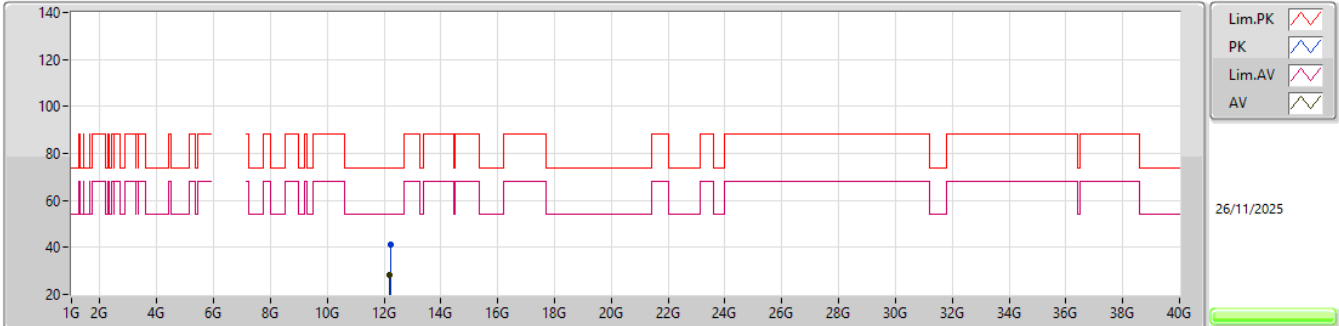


EUT V_4TX
Setting 82
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.21384G	41.29	74.00	-32.71	56.77	3	Vertical	65	1.34	-	38.97	11.22	65.67			
AV	12.19686G	28.37	54.00	-25.63	43.83	3	Vertical	65	1.34	-	39.01	11.21	65.68			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

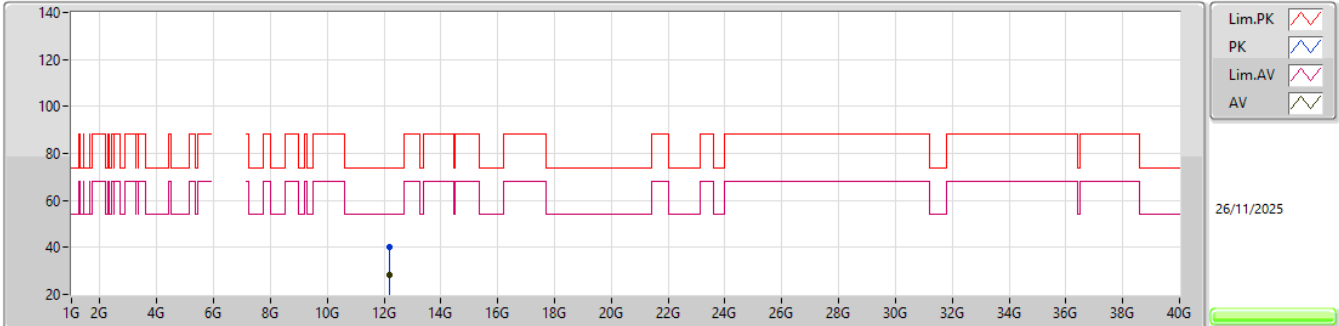


EUT V_4TX
Setting 82
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.2124G	40.25	74.00	-33.75	55.72	3	Horizontal	4	1.22	-	38.98	11.22	65.67			
AV	12.1965G	28.33	54.00	-25.67	43.79	3	Horizontal	4	1.22	-	39.01	11.21	65.68			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX


6105MHz_TX

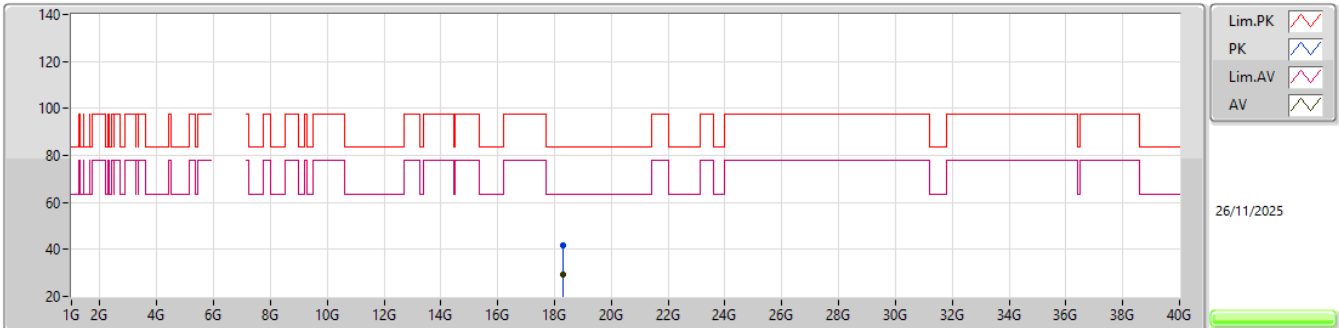EUT_V_4TX
Setting 82
06-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.31662G	41.81	83.54	-41.73	37.51	1	Vertical	61	1.86	-	37.50	16.44	49.64			
AV	18.3102G	29.41	63.54	-34.13	25.10	1	Vertical	61	1.86	-	37.50	16.44	49.63			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

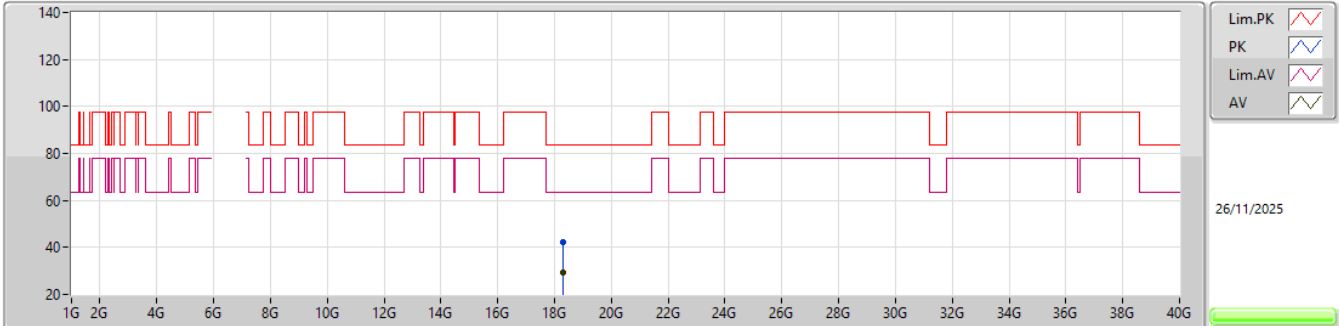


EUT_V_4TX
Setting 82
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31358G	42.05	83.54	-41.49	37.74	1	Horizontal	140	2.18	-	37.50	16.44	49.63			
AV	18.31102G	29.41	63.54	-34.13	25.10	1	Horizontal	140	2.18	-	37.50	16.44	49.63			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

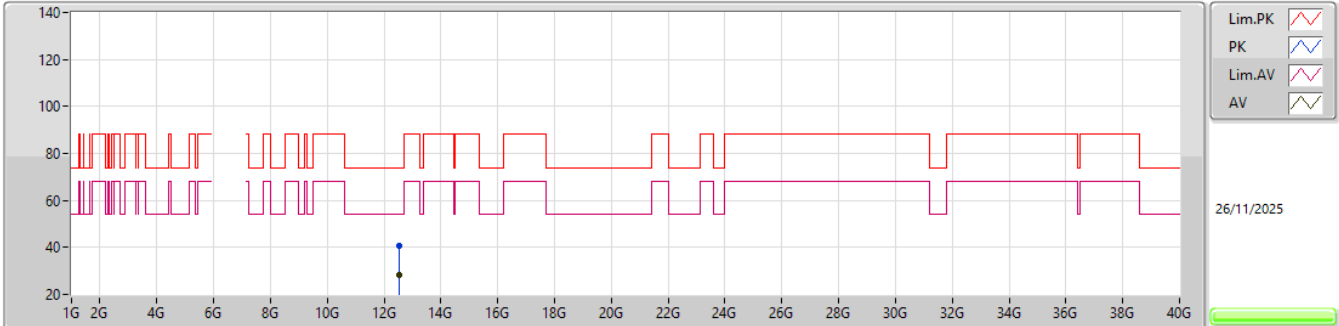


EUT_V_4TX
Setting 92
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.53684G	40.74	74.00	-33.26	56.24	3	Vertical	152	1.76	-	38.60	11.42	65.52			
AV	12.51542G	28.31	54.00	-25.69	43.85	3	Vertical	152	1.76	-	38.60	11.41	65.55			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

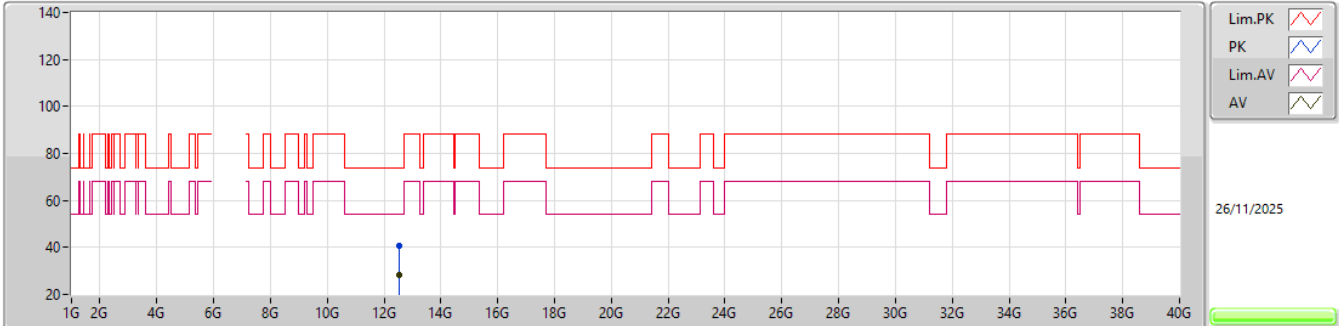


EUT V_4TX
Setting 92
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.5333G	40.51	74.00	-33.49	56.01	3	Horizontal	166	2.01	-	38.60	11.42	65.52			
AV	12.53642G	28.30	54.00	-25.70	43.80	3	Horizontal	166	2.01	-	38.60	11.42	65.52			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

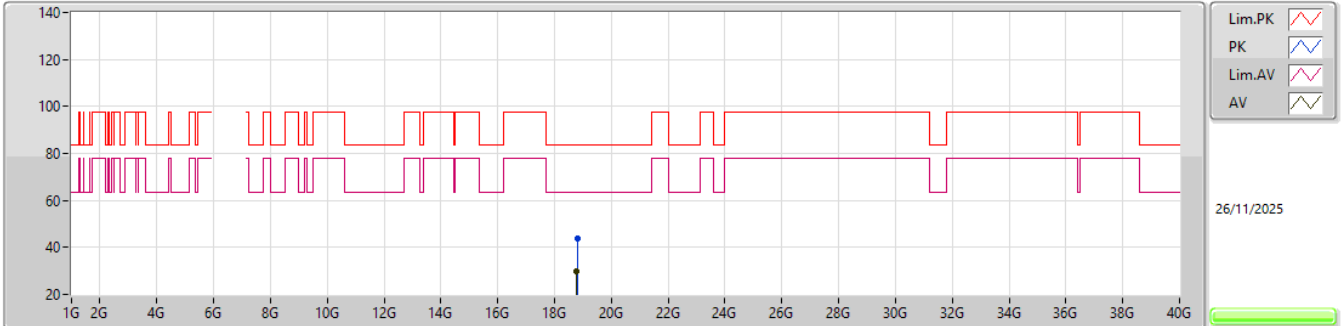


EUT_V_4TX
Setting 92
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.79296G	43.70	83.54	-39.84	38.79	1	Vertical	124	2.64	-	37.71	16.68	49.48			
AV	18.79017G	30.06	63.54	-33.48	25.14	1	Vertical	124	2.64	-	37.72	16.68	49.48			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

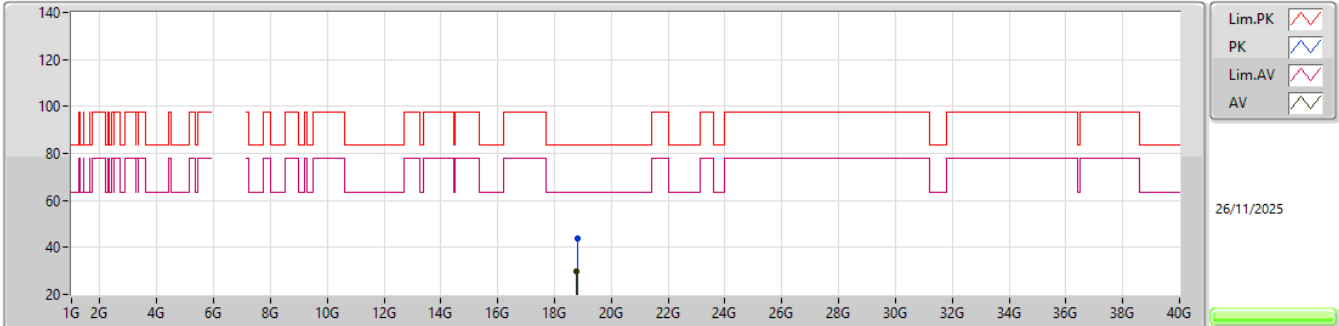


EUT V_4TX
Setting 92
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.79416G	43.80	83.54	-39.74	38.88	1	Horizontal	165	2.91	-	37.71	16.69	49.48			
AV	18.79007G	30.08	63.54	-33.46	25.16	1	Horizontal	165	2.91	-	37.72	16.68	49.48			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6425MHz_TX

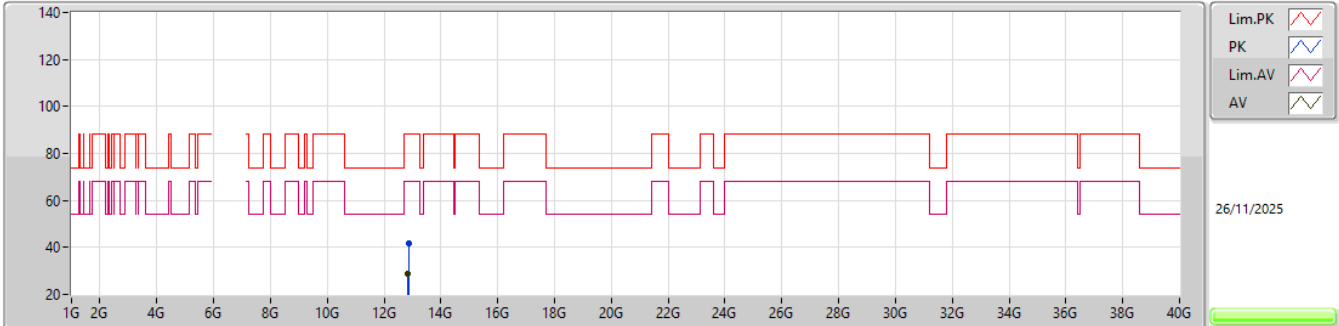


EUT_V_4TX
Setting 90
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8548G	41.62	88.20	-46.58	55.59	3	Vertical	168	2.16	-	39.49	11.62	65.08			
RMS	12.84604G	28.97	68.20	-39.23	42.96	3	Vertical	168	2.16	-	39.49	11.61	65.09			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6425MHz_TX

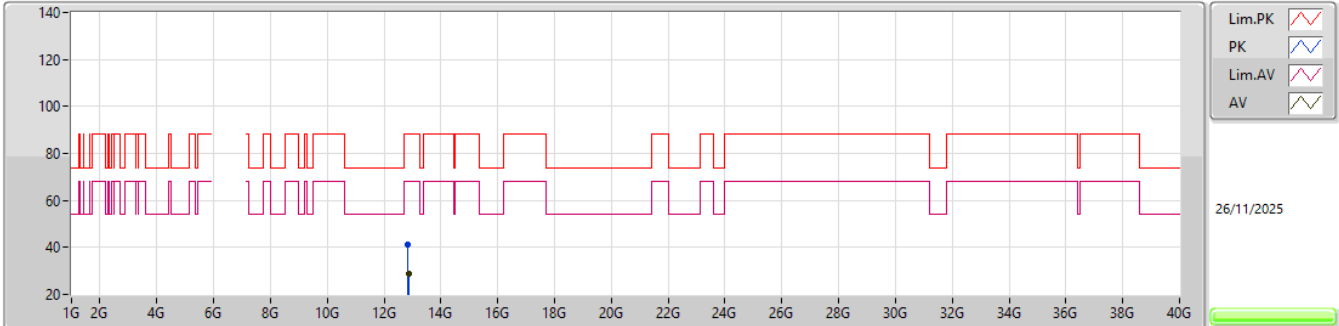


EUT_V_4TX
Setting 90
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.84448G	41.41	88.20	-46.79	55.40	3	Horizontal	40	1.52	-	39.49	11.61	65.09			
RMS	12.86254G	29.00	68.20	-39.20	42.98	3	Horizontal	40	1.52	-	39.47	11.62	65.07			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6425MHz_TX

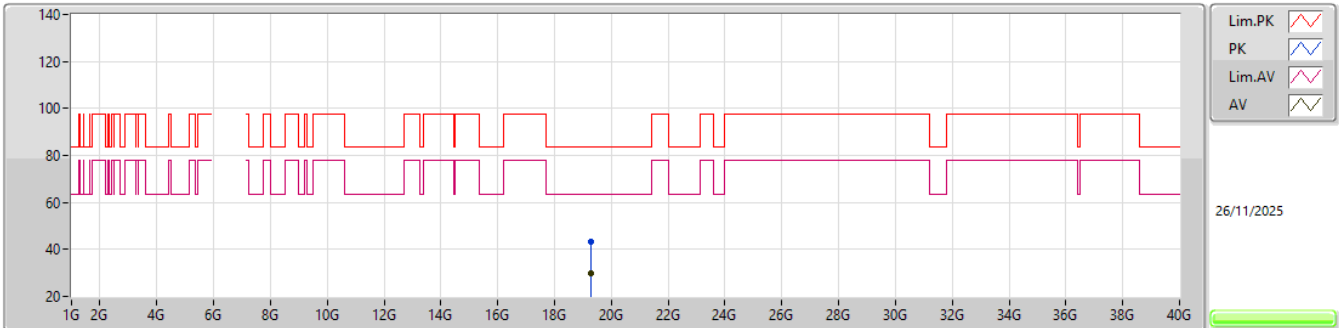


EUT_V_4TX
Setting 90
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.27971G	43.27	83.54	-40.27	38.01	1	Vertical	47	1.93	-	37.78	16.95	49.47			
AV	19.27005G	29.95	63.54	-33.59	24.65	1	Vertical	47	1.93	-	37.82	16.95	49.47			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX


6425MHz_TX

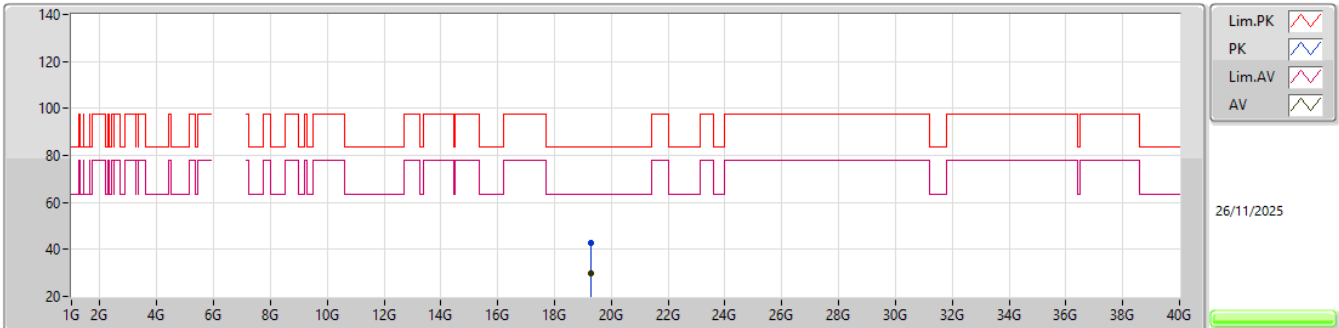EUT_V_4TX
Setting 90
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.27906G	42.62	83.54	-40.92	37.36	1	Horizontal	248	2.36	-	37.78	16.95	49.47			
AV	19.27029G	29.89	63.54	-33.65	24.59	1	Horizontal	248	2.36	-	37.82	16.95	49.47			

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6585MHz_TX

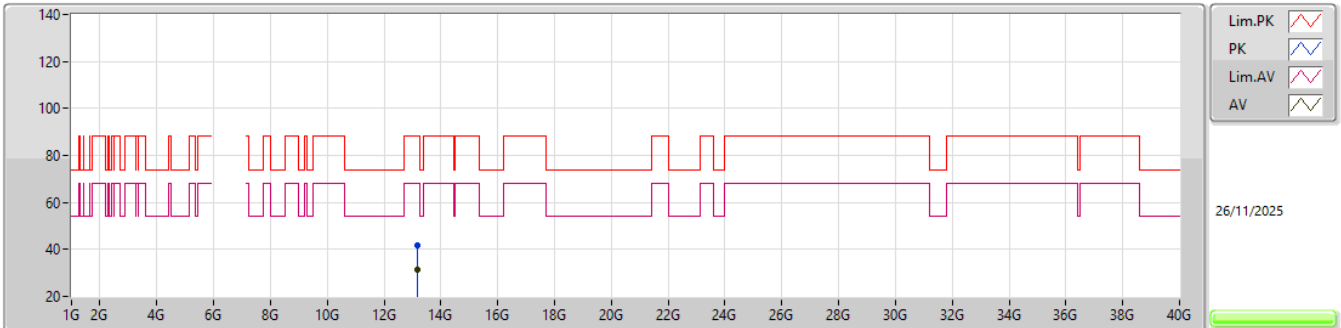


EUT_V_4TX
Setting 86
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.1841G	41.79	88.20	-46.41	55.33	3	Vertical	108	2.52	-	39.50	11.82	64.86			
RMS	13.18392G	31.23	68.20	-36.97	44.77	3	Vertical	108	2.52	-	39.50	11.82	64.86			

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6585MHz_TX

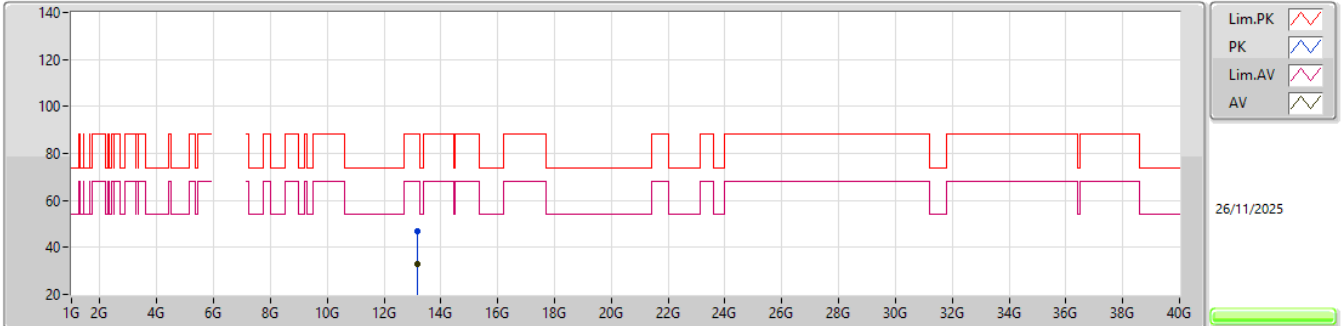


EUT_V_4TX
Setting 86
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.1814G	46.78	88.20	-41.42	60.32	3	Horizontal	250	2.86	-	39.50	11.82	64.86			
RMS	13.1835G	32.95	68.20	-35.25	46.49	3	Horizontal	250	2.86	-	39.50	11.82	64.86			

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX


6585MHz_TX

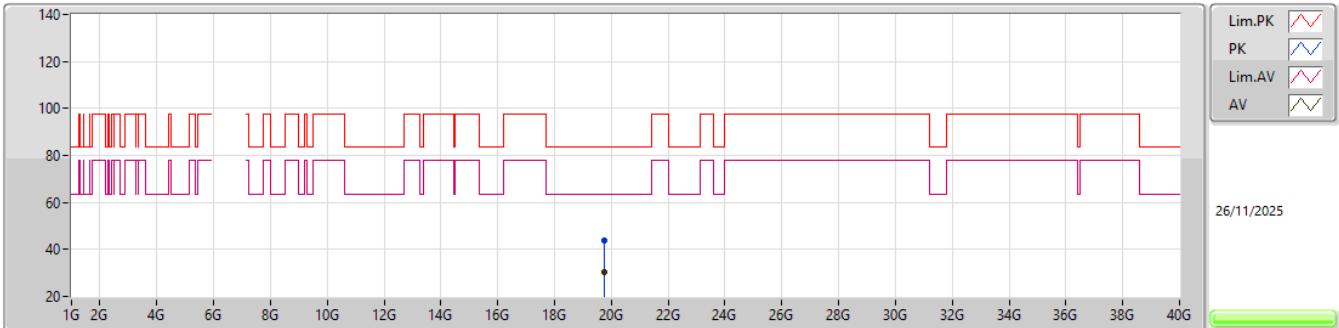EUT_Y_4TX
Setting 86
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.75326G	43.87	83.54	-39.67	38.46	1	Vertical	303	2.80	-	37.61	17.23	49.43			
AV	19.75018G	30.23	63.54	-33.31	24.83	1	Vertical	303	2.80	-	37.60	17.23	49.43			

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6585MHz_TX

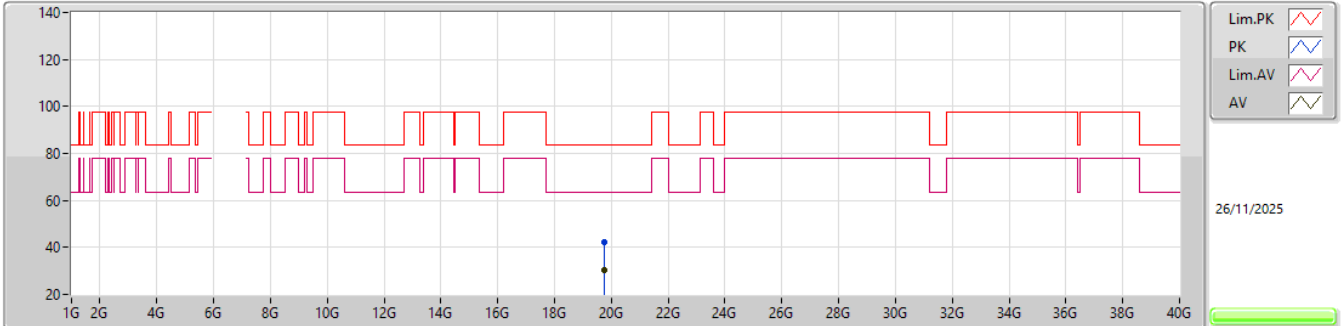


EUT_Y_4TX
Setting 86
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.75912G	42.00	83.54	-41.54	36.55	1	Horizontal	102	1.31	-	37.64	17.23	49.42			
AV	19.75383G	30.29	63.54	-33.25	24.87	1	Horizontal	102	1.31	-	37.62	17.23	49.43			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6745MHz_TX

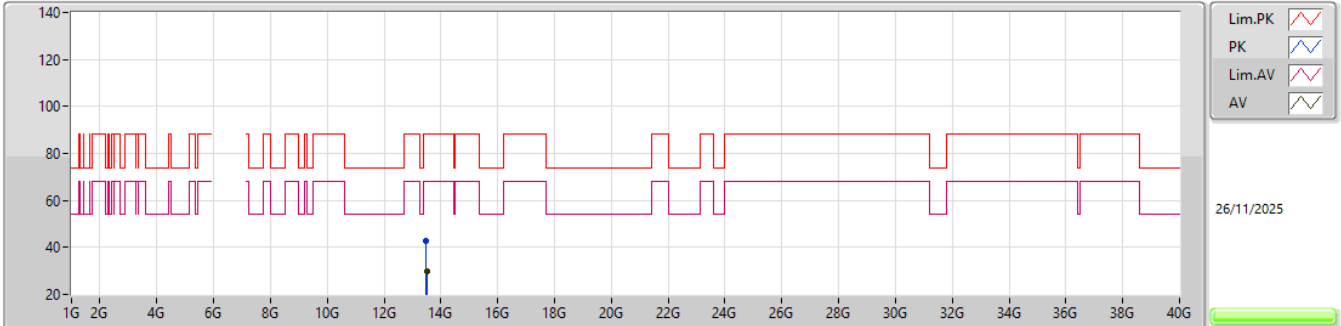


EUT_V_4TX
Setting 75
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.48676G	42.64	88.20	-45.56	55.29	3	Vertical	111	2.25	-	40.17	12.01	64.83			
RMS	13.50416G	30.07	68.20	-38.13	42.66	3	Vertical	111	2.25	-	40.22	12.02	64.83			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6745MHz_TX

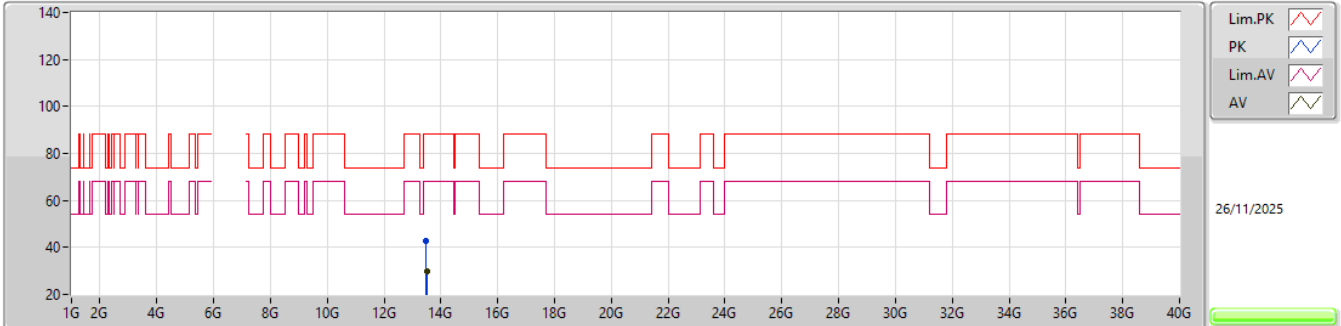


EUT_V_4TX
Setting 75
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.48988G	42.90	88.20	-45.30	55.54	3	Horizontal	25	2.02	-	40.18	12.01	64.83			
RMS	13.50434G	29.96	68.20	-38.24	42.54	3	Horizontal	25	2.02	-	40.23	12.02	64.83			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6745MHz_TX

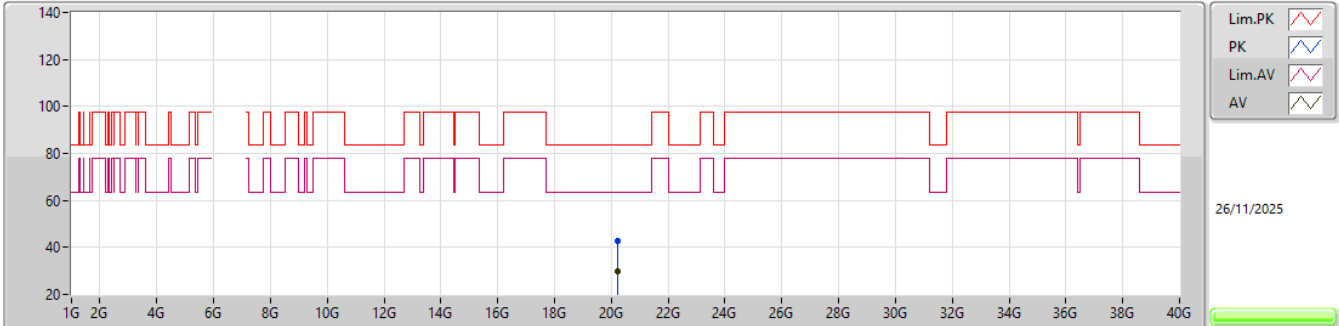


EUT_Y_4TX
Setting 75
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.23599G	42.83	83.54	-40.71	37.01	1	Vertical	47	1.26	-	37.67	17.40	49.25			
AV	20.2301G	29.72	63.54	-33.82	23.91	1	Vertical	47	1.26	-	37.66	17.40	49.25			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6745MHz_TX

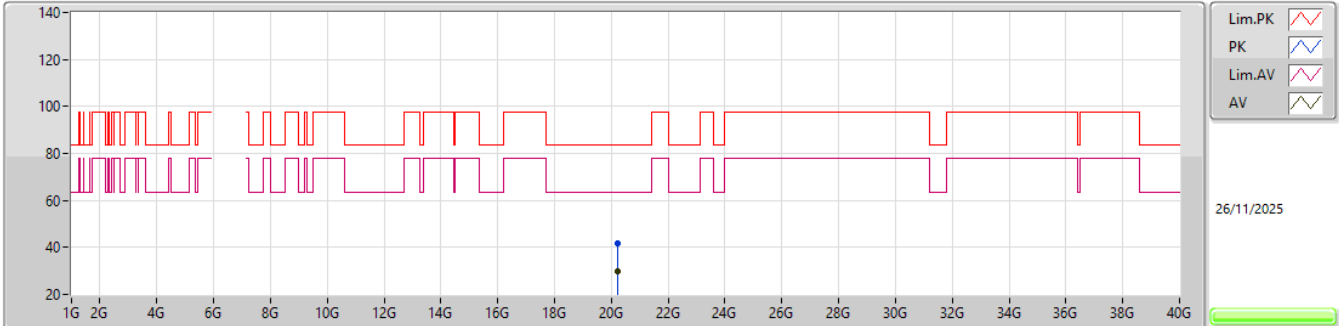


EUT_Y_4TX
Setting 75
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.23857G	41.70	83.54	-41.84	35.87	1	Horizontal	344	1.19	-	37.68	17.40	49.25			
AV	20.23622G	29.87	63.54	-33.67	24.05	1	Horizontal	344	1.19	-	37.67	17.40	49.25			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6905MHz_TX

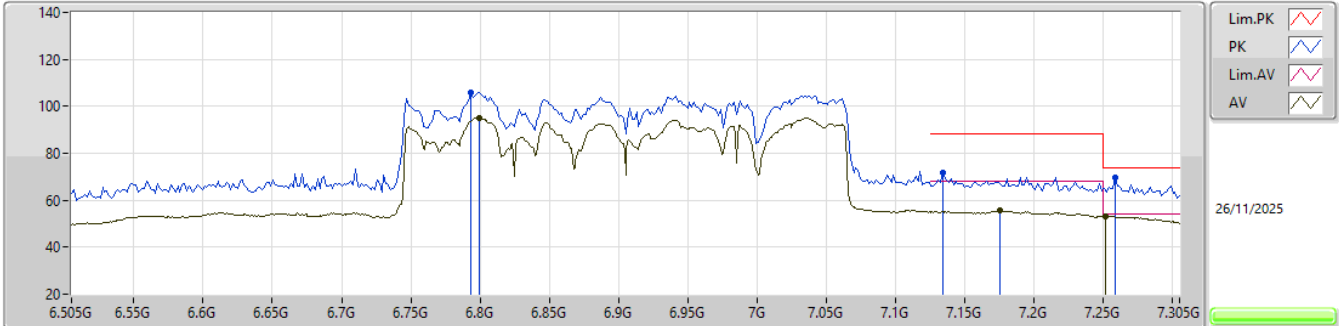


EUT_Y_4TX
Setting 75
06-U-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.793G	106.08	Inf	-Inf	97.01	3	Vertical	270	1.80	-	34.39	8.09	33.41			
RMS	6.7994G	95.21	Inf	-Inf	86.12	3	Vertical	270	1.80	-	34.40	8.10	33.41			
PK	7.1338G	71.72	88.20	-16.48	60.60	3	Vertical	270	1.80	-	36.14	8.44	33.46			
RMS	7.1754G	55.57	68.20	-12.63	44.35	3	Vertical	270	1.80	-	36.25	8.45	33.48			
PK	7.2586G	69.53	74.00	-4.47	58.00	3	Vertical	270	1.80	-	36.43	8.61	33.51			
AV	7.2514G	53.32	54.00	-0.68	41.83	3	Vertical	270	1.80	-	36.41	8.59	33.51			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6905MHz_TX

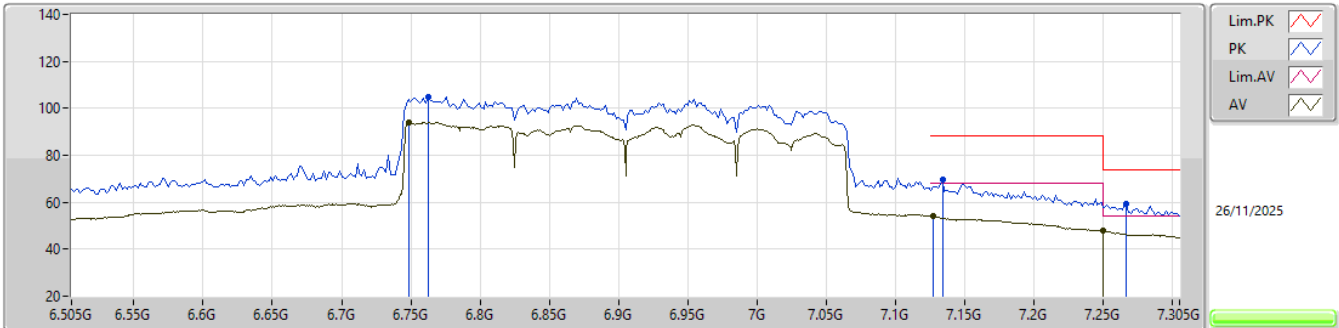


EUT_Y_4TX
Setting 75
06-U-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.7626G	105.07	Inf	-Inf	96.09	3	Horizontal	60	1.80	-	34.33	8.06	33.41			
RMS	6.7482G	94.11	Inf	-Inf	85.19	3	Horizontal	60	1.80	-	34.30	8.04	33.42			
PK	7.1338G	69.54	88.20	-18.66	58.42	3	Horizontal	60	1.80	-	36.14	8.44	33.46			
RMS	7.1274G	54.00	68.20	-14.20	42.91	3	Horizontal	60	1.80	-	36.11	8.44	33.46			
PK	7.2666G	59.50	74.00	-14.50	47.92	3	Horizontal	60	1.80	-	36.47	8.63	33.52			
AV	7.25G	48.00	54.00	-6.00	36.53	3	Horizontal	60	1.80	-	36.40	8.58	33.51			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6905MHz_TX

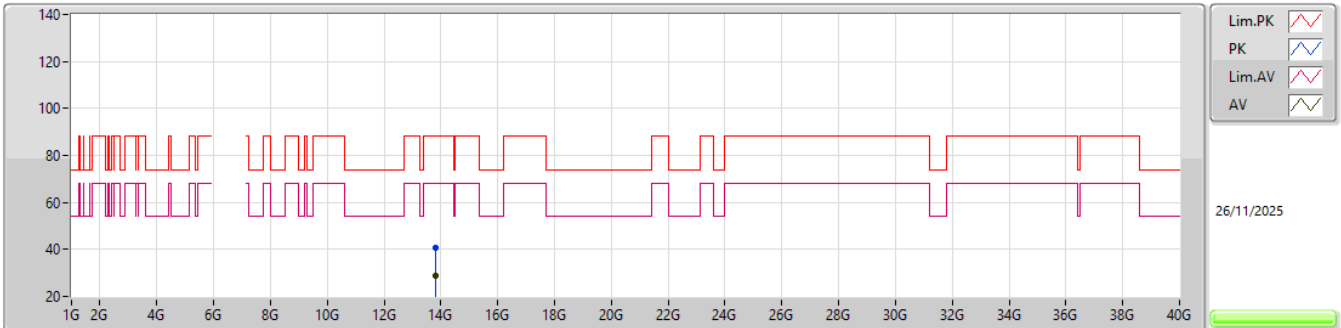


EUT V_4TX
Setting 75
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.8202G	40.72	88.20	-47.48	52.88	3	Vertical	72	1.14	-	40.30	12.22	64.68			
RMS	13.8238G	28.57	68.20	-39.63	40.73	3	Vertical	72	1.14	-	40.30	12.22	64.68			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6905MHz_TX

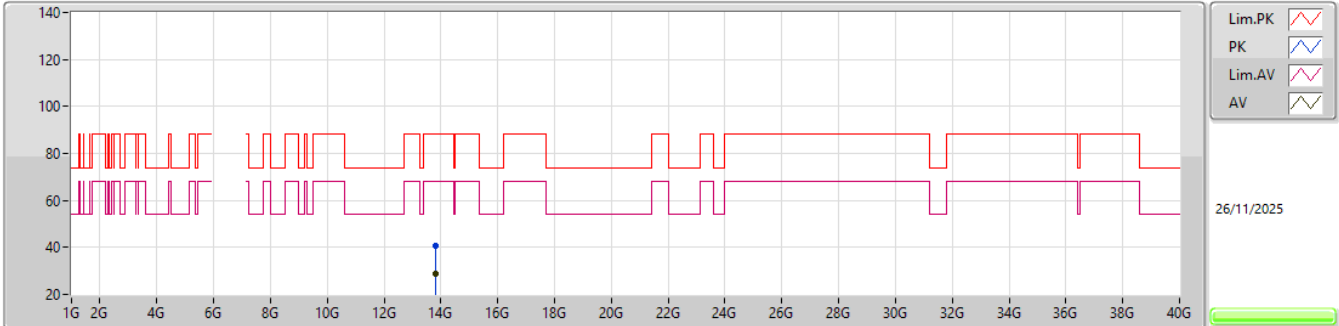


EUT_V_4TX
Setting 75
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.81816G	40.88	88.20	-47.32	53.04	3	Horizontal	236	2.40	-	40.30	12.22	64.68			
RMS	13.81468G	28.55	68.20	-39.65	40.72	3	Horizontal	236	2.40	-	40.30	12.22	64.69			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6905MHz_TX

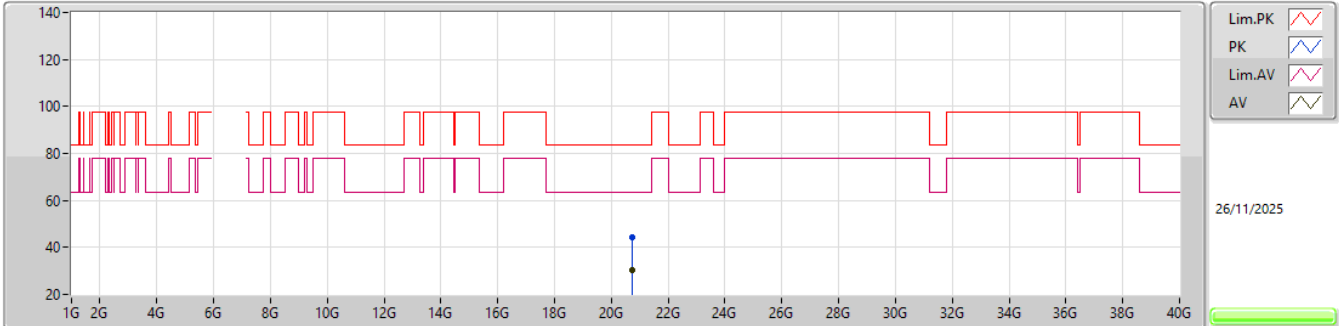


EUT_Y_4TX
Setting 75
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.71504G	44.53	83.54	-39.01	38.39	1	Vertical	189	1.36	-	37.79	17.47	49.12			
AV	20.71927G	30.38	63.54	-33.16	24.21	1	Vertical	189	1.36	-	37.82	17.47	49.12			

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6905MHz_TX

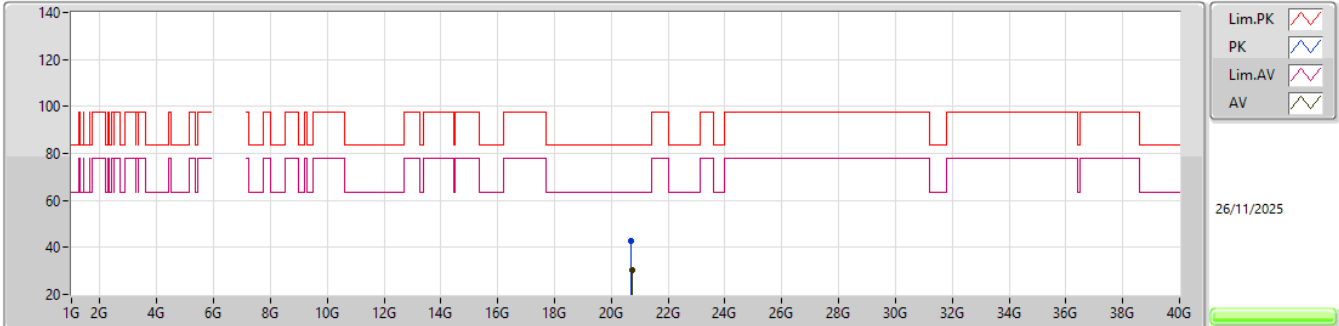

EUT_Y_4TX
Setting 75
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.71185G	42.66	83.54	-40.88	36.54	1	Horizontal	294	1.37	-	37.77	17.47	49.12			
AV	20.7182G	30.28	63.54	-33.26	24.12	1	Horizontal	294	1.37	-	37.81	17.47	49.12			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT320_Nss2,(MCS0)_2TX	Pass	AV	5.916G	68.19	68.20	-0.01	3	Vertical	306	1.00	104

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5955MHz_TX

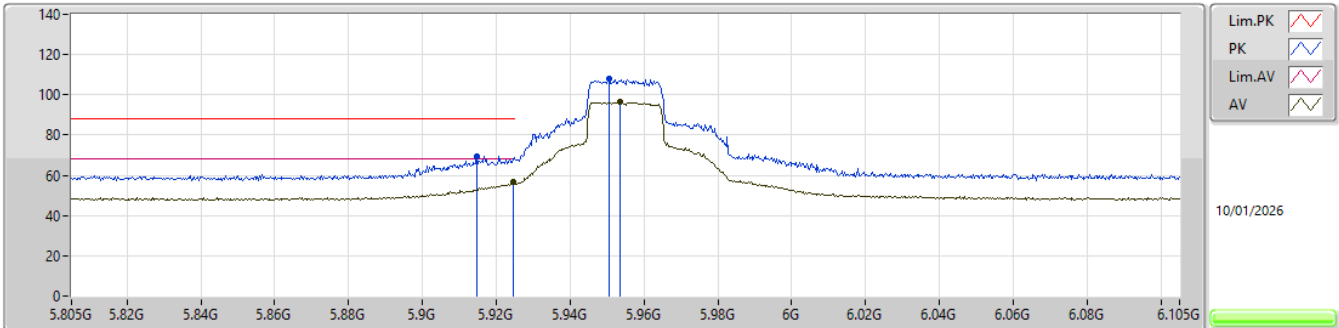


EUT_Y_1TX
SET 91
91
11.73

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9148G	69.59	88.20	-18.61	61.31	3	Vertical	25	1.80	91	34.13	8.93	34.78			
RMS	5.9247G	56.47	68.20	-11.73	48.16	3	Vertical	25	1.80	91	34.15	8.94	34.78			
PK	5.9505G	108.05	Inf	-Inf	99.64	3	Vertical	25	1.80	91	34.20	8.97	34.76			
RMS	5.9535G	96.26	Inf	-Inf	87.84	3	Vertical	25	1.80	91	34.20	8.98	34.76			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5955MHz_TX

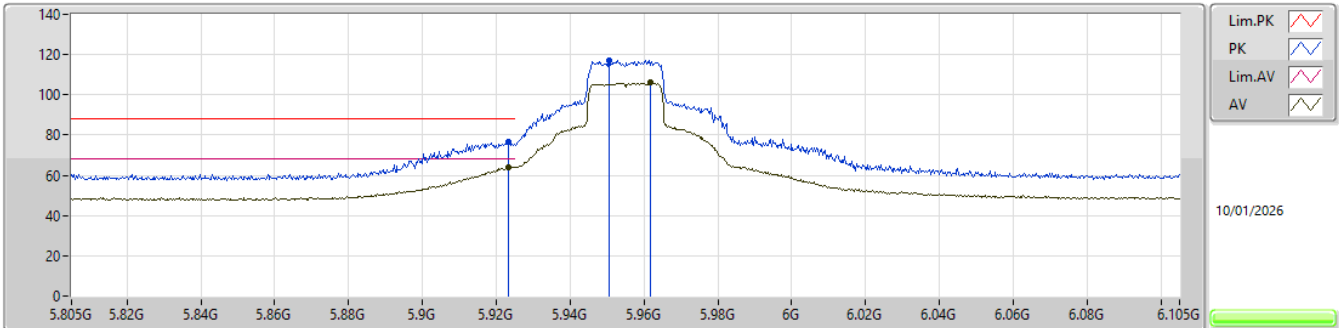


EUT_Y_1TX
SET 91
91
4.14

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.9232G	76.45	88.20	-11.75	68.14	3	Horizontal	275	1.80	91	34.15	8.94	34.78				
RMS	5.9232G	64.06	68.20	-4.14	55.75	3	Horizontal	275	1.80	91	34.15	8.94	34.78				
PK	5.9505G	117.30	Inf	-Inf	108.89	3	Horizontal	275	1.80	91	34.20	8.97	34.76				
RMS	5.9619G	105.95	Inf	-Inf	97.52	3	Horizontal	275	1.80	91	34.20	8.99	34.76				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5965MHz_TX

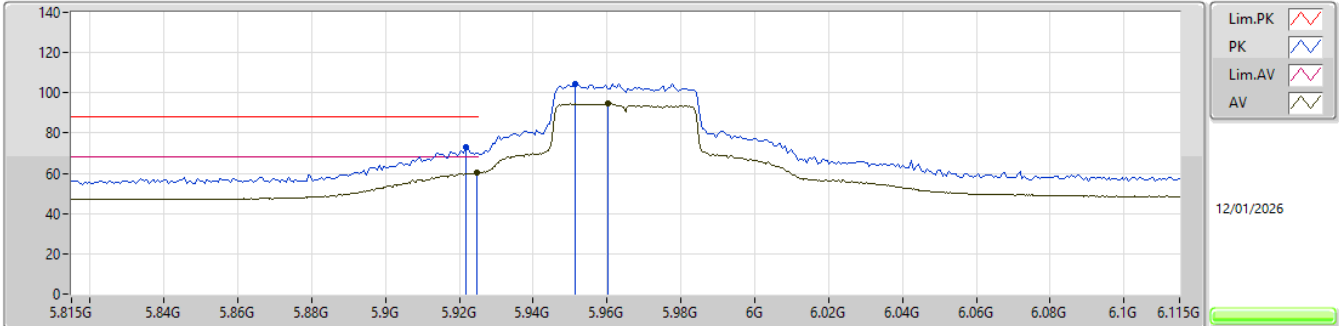


EUT_Y_1TX
Setting 87
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9218G	72.77	88.20	-15.43	66.72	3	Vertical	30	1.74	-	32.24	7.57	33.76			
RMS	5.9248G	60.46	68.20	-7.74	54.40	3	Vertical	30	1.74	-	32.25	7.57	33.76			
PK	5.9512G	104.40	Inf	-Inf	98.24	3	Vertical	30	1.74	-	32.30	7.62	33.76			
RMS	5.9602G	94.53	Inf	-Inf	88.32	3	Vertical	30	1.74	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5965MHz_TX

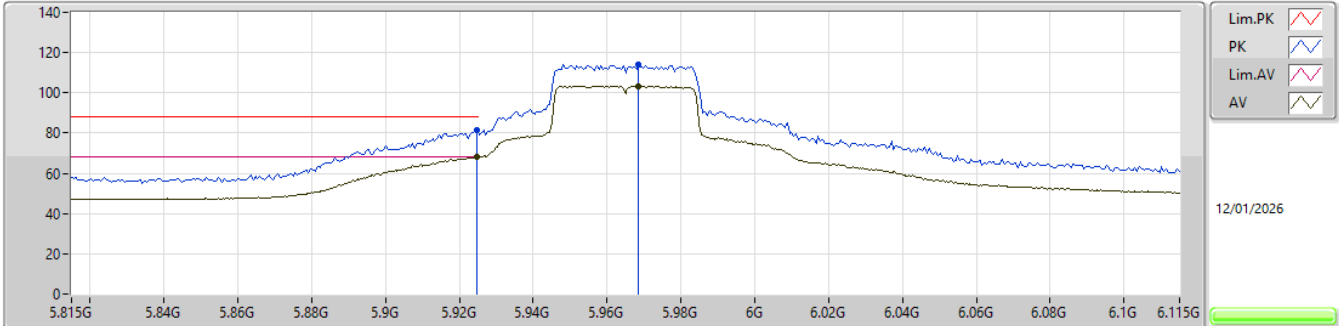


EUT_Y_1TX
Setting 87
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9248G	81.18	88.20	-7.02	75.12	3	Horizontal	280	2.50	-	32.25	7.57	33.76			
RMS	5.9248G	68.10	68.20	-0.10	62.04	3	Horizontal	280	2.50	-	32.25	7.57	33.76			
PK	5.9686G	114.12	Inf	-Inf	107.88	3	Horizontal	280	2.50	-	32.34	7.65	33.75			
RMS	5.9686G	103.40	Inf	-Inf	97.16	3	Horizontal	280	2.50	-	32.34	7.65	33.75			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_1TX


5985MHz_TX

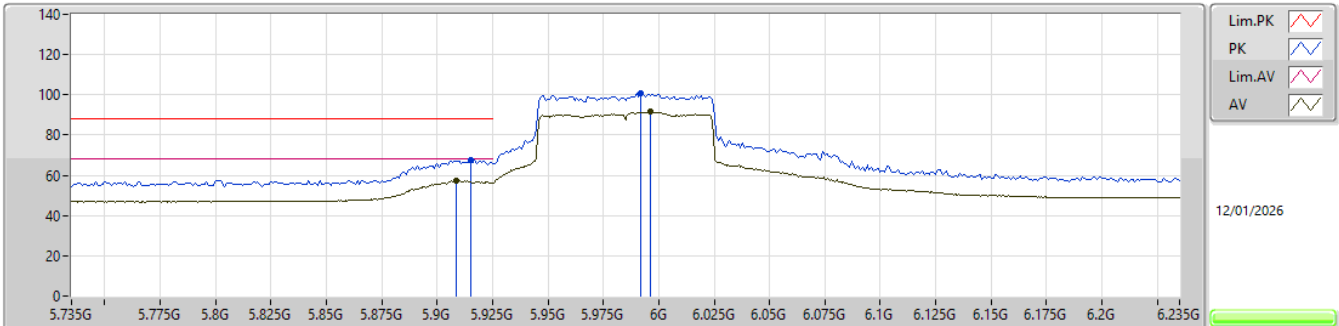EUT_Y_1TX
Setting 93
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.915G	67.87	88.20	-20.33	61.84	3	Vertical	27	1.80	-	32.23	7.56	33.76				
RMS	5.9085G	57.52	68.20	-10.68	51.51	3	Vertical	27	1.80	-	32.22	7.55	33.76				
PK	5.992G	100.93	Inf	-Inf	94.60	3	Vertical	27	1.80	-	32.38	7.70	33.75				
RMS	5.9965G	91.69	Inf	-Inf	85.35	3	Vertical	27	1.80	-	32.39	7.70	33.75				

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_1TX

5985MHz_TX

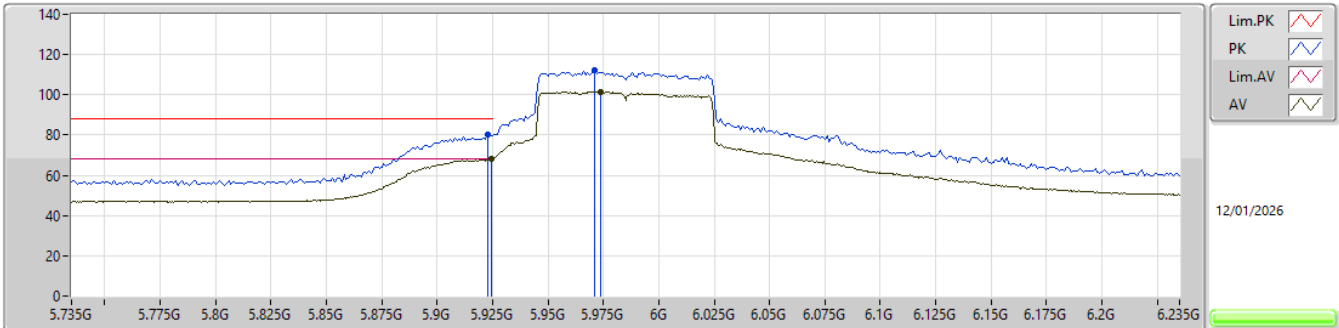


EUT_Y_1TX
Setting 93
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.923G	80.51	88.20	-7.69	74.45	3	Horizontal	292	2.61	-	32.25	7.57	33.76			
RMS	5.9245G	68.06	68.20	-0.14	62.00	3	Horizontal	292	2.61	-	32.25	7.57	33.76			
PK	5.971G	111.96	Inf	-Inf	105.71	3	Horizontal	292	2.61	-	32.34	7.66	33.75			
RMS	5.9735G	101.62	Inf	-Inf	95.36	3	Horizontal	292	2.61	-	32.35	7.66	33.75			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_1TX

6025MHz_TX

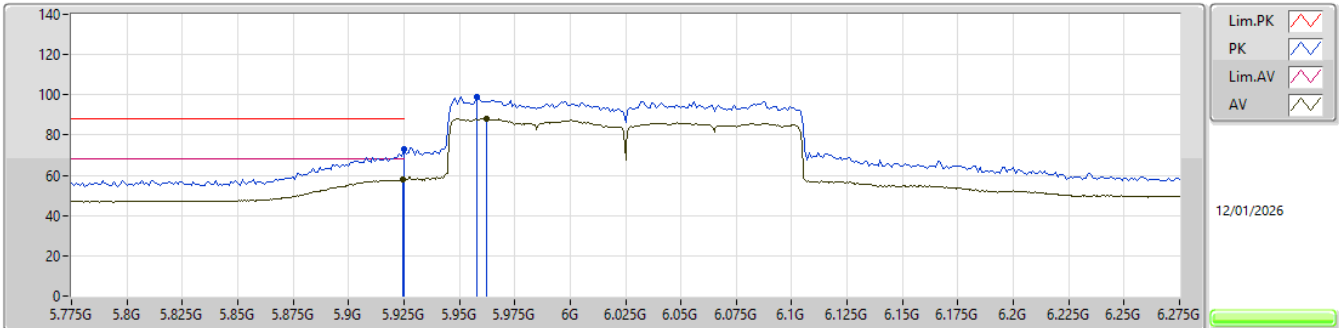


EUT_Y_1TX
Setting 84
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.925G	73.11	88.20	-15.09	67.04	3	Vertical	30	1.75	-	32.25	7.58	33.76				
RMS	5.9245G	57.92	68.20	-10.28	51.86	3	Vertical	30	1.75	-	32.25	7.57	33.76				
PK	5.958G	99.00	Inf	-Inf	92.81	3	Vertical	30	1.75	-	32.32	7.63	33.76				
RMS	5.9625G	88.29	Inf	-Inf	82.08	3	Vertical	30	1.75	-	32.32	7.64	33.75				

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_1TX

6025MHz_TX

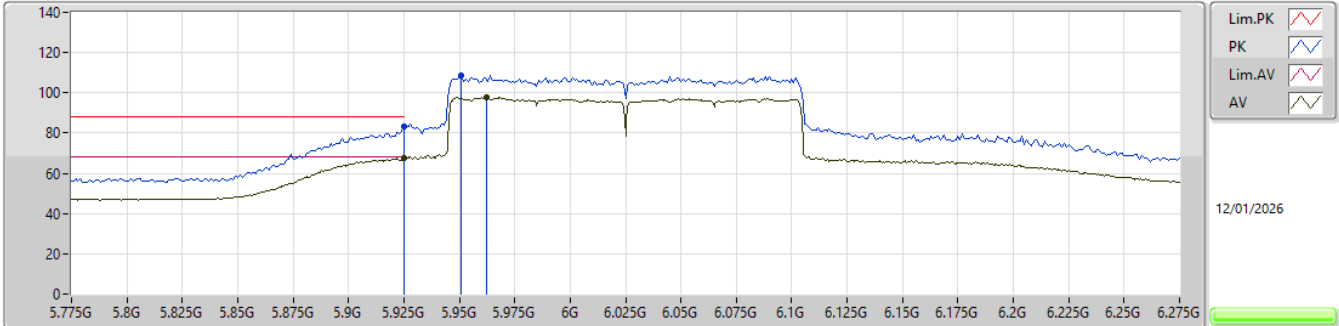


EUT_Y_1TX
Setting 84
06-U-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	83.50	88.20	-4.70	77.43	3	Horizontal	287	2.54	-	32.25	7.58	33.76			
RMS	5.925G	67.84	68.20	-0.36	61.77	3	Horizontal	287	2.54	-	32.25	7.58	33.76			
PK	5.951G	108.46	Inf	-Inf	102.30	3	Horizontal	287	2.54	-	32.30	7.62	33.76			
RMS	5.9625G	97.62	Inf	-Inf	91.41	3	Horizontal	287	2.54	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_1TX

6105MHz_TX

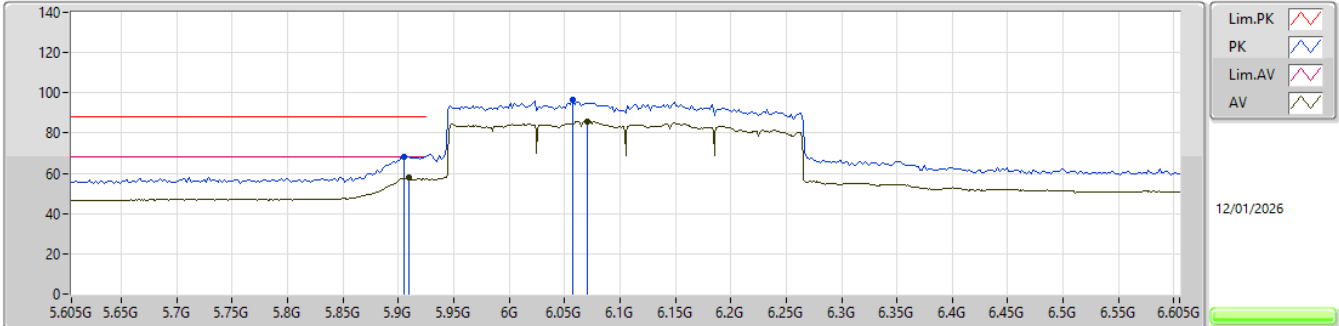


EUT_Y_1TX
Setting 92
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.905G	68.33	88.20	-19.87	62.34	3	Vertical	26	1.60	-	32.21	7.54	33.76			
RMS	5.909G	57.70	68.20	-10.50	51.69	3	Vertical	26	1.60	-	32.22	7.55	33.76			
PK	6.057G	96.27	Inf	-Inf	89.81	3	Vertical	26	1.60	-	32.50	7.67	33.71			
RMS	6.071G	85.89	Inf	-Inf	79.43	3	Vertical	26	1.60	-	32.50	7.66	33.70			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_1TX

6105MHz_TX

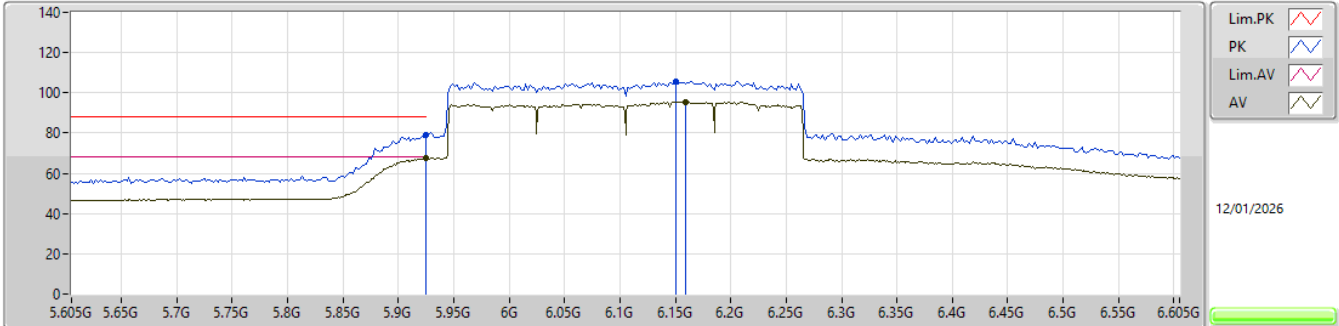


EUT_Y_1TX
Setting 92
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	79.13	88.20	-9.07	73.06	3	Horizontal	296	2.59	-	32.25	7.58	33.76			
RMS	5.925G	67.69	68.20	-0.51	61.62	3	Horizontal	296	2.59	-	32.25	7.58	33.76			
PK	6.151G	105.57	Inf	-Inf	98.91	3	Horizontal	296	2.59	-	32.70	7.61	33.65			
RMS	6.159G	95.52	Inf	-Inf	88.84	3	Horizontal	296	2.59	-	32.72	7.61	33.65			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5955MHz_TX

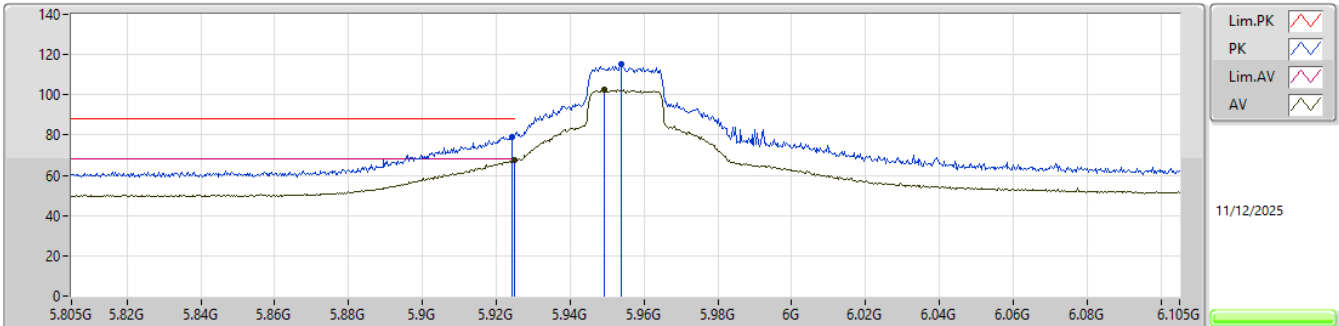


EUT_V_2TX
SET 96
80\108\89\98\94\96\97\96
15.54\ -4.88\6.09\ -1.64\1.91\0.90\ -0.57\0.81

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9244G	79.19	88.20	-9.01	68.85	3	Vertical	14	2.81	96	34.10	8.68	32.44			
RMS	5.925G	67.39	68.20	-0.81	57.05	3	Vertical	14	2.81	96	34.10	8.68	32.44			
PK	5.9538G	115.28	Inf	-Inf	104.91	3	Vertical	14	2.81	96	34.10	8.71	32.44			
RMS	5.9493G	102.52	Inf	-Inf	92.15	3	Vertical	14	2.81	96	34.10	8.71	32.44			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5955MHz_TX

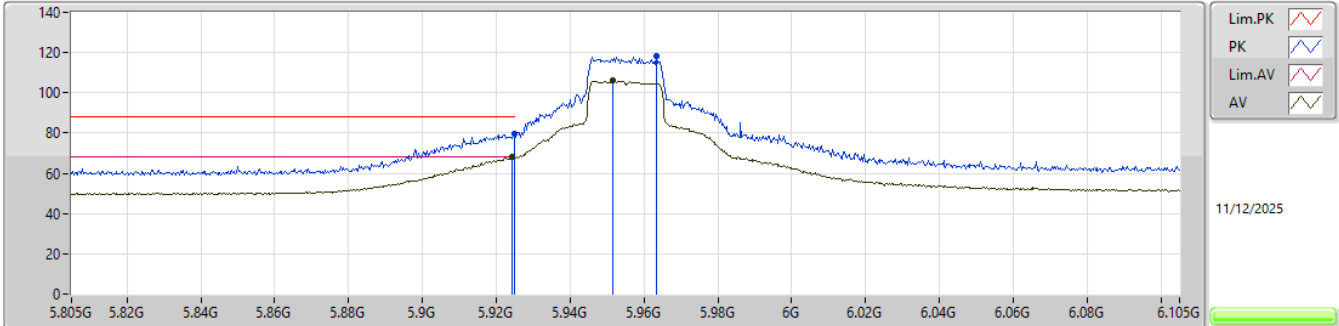


EUT Y_2TX
SET 91
96\86\95\91\93\92\91
-2.41\6.66\ -1.57\0.85\ -0.83\ -0.28\0.25

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	79.87	88.20	-8.33	69.53	3	Horizontal	289	1.80	91	34.10	8.68	32.44			
RMS	5.9244G	67.95	68.20	-0.25	57.61	3	Horizontal	289	1.80	91	34.10	8.68	32.44			
PK	5.9634G	118.20	Inf	-Inf	107.82	3	Horizontal	289	1.80	91	34.10	8.72	32.44			
RMS	5.9514G	105.94	Inf	-Inf	95.57	3	Horizontal	289	1.80	91	34.10	8.71	32.44			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5965MHz_TX

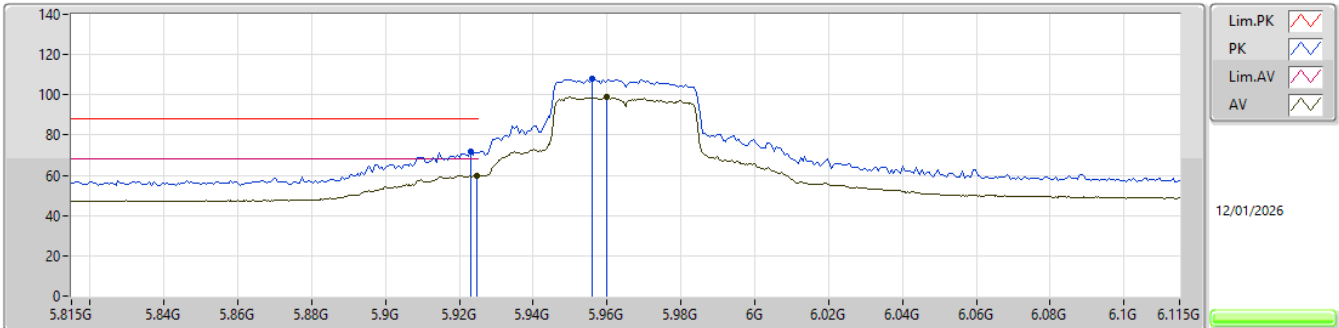


EUT Y_2TX
Setting 84
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.923G	71.67	88.20	-16.53	65.61	3	Vertical	334	2.97	-	32.25	7.57	33.76			
RMS	5.9248G	60.04	68.20	-8.16	53.98	3	Vertical	334	2.97	-	32.25	7.57	33.76			
PK	5.956G	107.78	Inf	-Inf	101.60	3	Vertical	334	2.97	-	32.31	7.63	33.76			
RMS	5.9599G	98.97	Inf	-Inf	92.76	3	Vertical	334	2.97	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5965MHz_TX

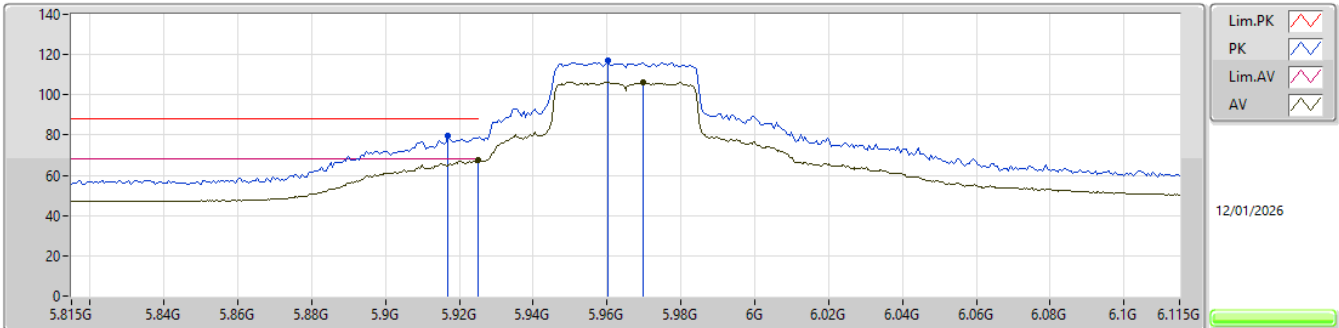


EUT_Y_2TX
Setting 84
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.917G	79.87	88.20	-8.33	73.84	3	Horizontal	290	2.62	-	32.23	7.56	33.76			
RMS	5.925G	67.73	68.20	-0.47	61.66	3	Horizontal	290	2.62	-	32.25	7.58	33.76			
PK	5.9602G	116.87	Inf	-Inf	110.66	3	Horizontal	290	2.62	-	32.32	7.64	33.75			
RMS	5.9698G	106.47	Inf	-Inf	100.22	3	Horizontal	290	2.62	-	32.34	7.66	33.75			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5985MHz_TX

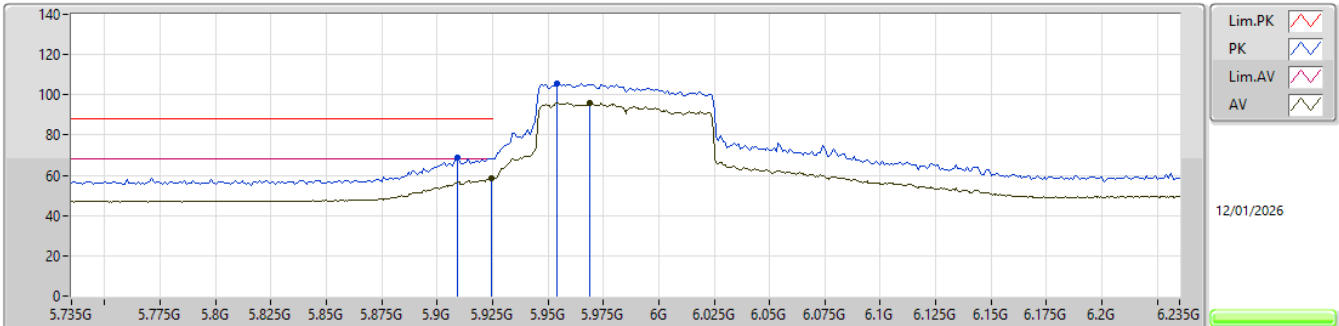


EUT_Y_2TX
Setting 90
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.909G	68.69	88.20	-19.51	62.68	3	Vertical	329	2.96	-	32.22	7.55	33.76			
RMS	5.9245G	58.44	68.20	-9.76	52.38	3	Vertical	329	2.96	-	32.25	7.57	33.76			
PK	5.954G	105.59	Inf	-Inf	99.41	3	Vertical	329	2.96	-	32.31	7.63	33.76			
RMS	5.969G	96.08	Inf	-Inf	89.84	3	Vertical	329	2.96	-	32.34	7.65	33.75			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5985MHz_TX

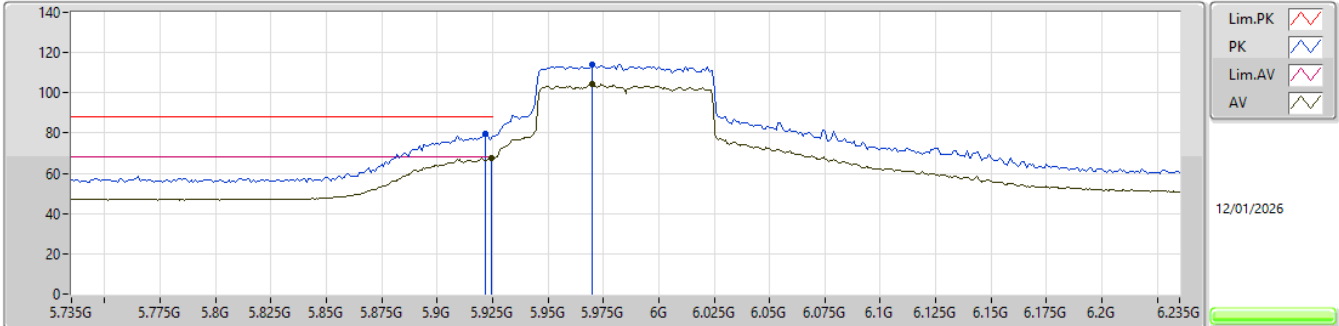


EUT_Y_2TX
Setting 90
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.922G	79.47	88.20	-8.73	73.42	3	Horizontal	286	2.61	-	32.24	7.57	33.76			
RMS	5.9245G	67.64	68.20	-0.56	61.58	3	Horizontal	286	2.61	-	32.25	7.57	33.76			
PK	5.97G	114.18	Inf	-Inf	107.93	3	Horizontal	286	2.61	-	32.34	7.66	33.75			
RMS	5.97G	104.15	Inf	-Inf	97.90	3	Horizontal	286	2.61	-	32.34	7.66	33.75			

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

6025MHz_TX

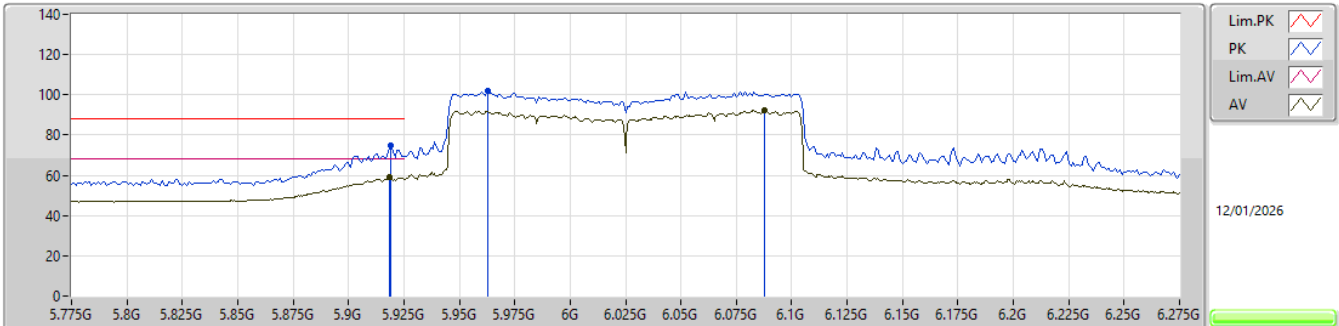


EUT_Y_2TX
Setting 80
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.919G	75.11	88.20	-13.09	69.07	3	Vertical	319	2.97	-	32.24	7.56	33.76			
RMS	5.9185G	59.04	68.20	-9.16	53.00	3	Vertical	319	2.97	-	32.24	7.56	33.76			
PK	5.963G	101.96	Inf	-Inf	95.74	3	Vertical	319	2.97	-	32.33	7.64	33.75			
RMS	6.0875G	92.15	Inf	-Inf	85.69	3	Vertical	319	2.97	-	32.50	7.65	33.69			

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

6025MHz_TX

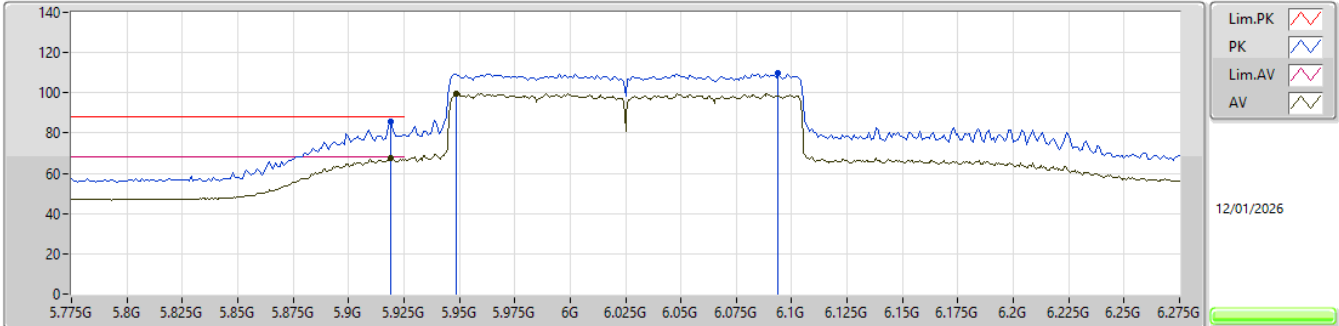


EUT_Y_2TX
Setting 80
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.919G	85.42	88.20	-2.78	79.38	3	Horizontal	289	2.31	-	32.24	7.56	33.76			
RMS	5.919G	67.60	68.20	-0.60	61.56	3	Horizontal	289	2.31	-	32.24	7.56	33.76			
PK	6.094G	109.81	Inf	-Inf	103.35	3	Horizontal	289	2.31	-	32.50	7.65	33.69			
RMS	5.9485G	99.63	Inf	-Inf	93.47	3	Horizontal	289	2.31	-	32.30	7.62	33.76			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

6105MHz_TX

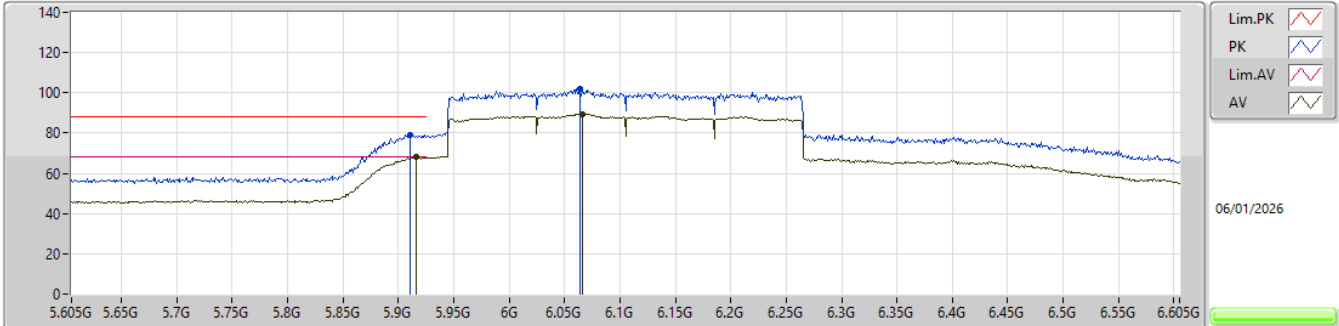


EUT_Y_2TX
SET 104
92\108\100\104
7.52\1.82\3.02\0.01

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.911G	79.32	88.20	-8.88	73.31	3	Vertical	306	1.00	104	32.22	7.55	33.76				
AV	5.916G	68.19	68.20	-0.01	62.16	3	Vertical	306	1.00	104	32.23	7.56	33.76				
PK	6.064G	101.89	Inf	-Inf	95.43	3	Vertical	306	1.00	104	32.50	7.67	33.71				
AV	6.066G	89.50	Inf	-Inf	83.04	3	Vertical	306	1.00	104	32.50	7.67	33.71				

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

6105MHz_TX

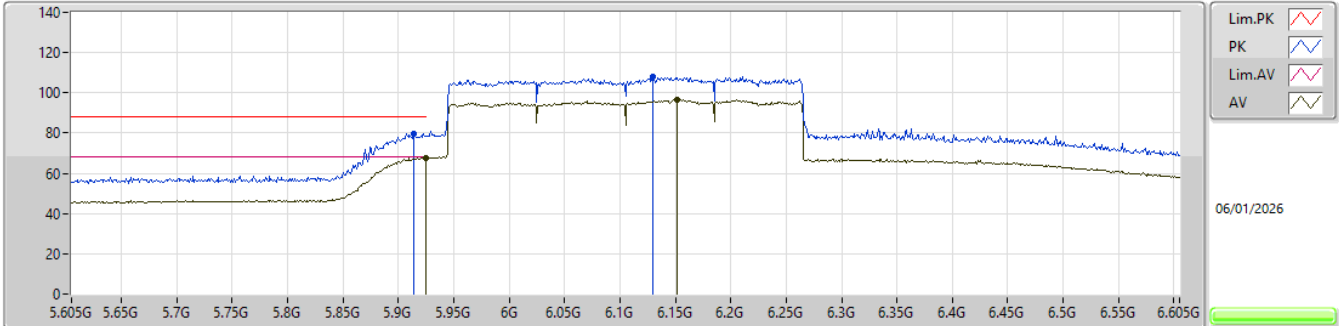


EUT_Y_2TX
SET 88
104\65\103\84\93\89\87\88
-9.75\17.51\8.85\3.25\3.26\0.65\1.26\0.40

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.914G	79.92	88.20	-8.28	73.89	3	Horizontal	298	2.57	88	32.23	7.56	33.76			
AV	5.925G	67.80	68.20	-0.40	61.73	3	Horizontal	298	2.57	88	32.25	7.58	33.76			
PK	6.13G	107.94	Inf	-Inf	101.36	3	Horizontal	298	2.57	88	32.62	7.63	33.67			
AV	6.152G	96.56	Inf	-Inf	89.90	3	Horizontal	298	2.57	88	32.70	7.61	33.65			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

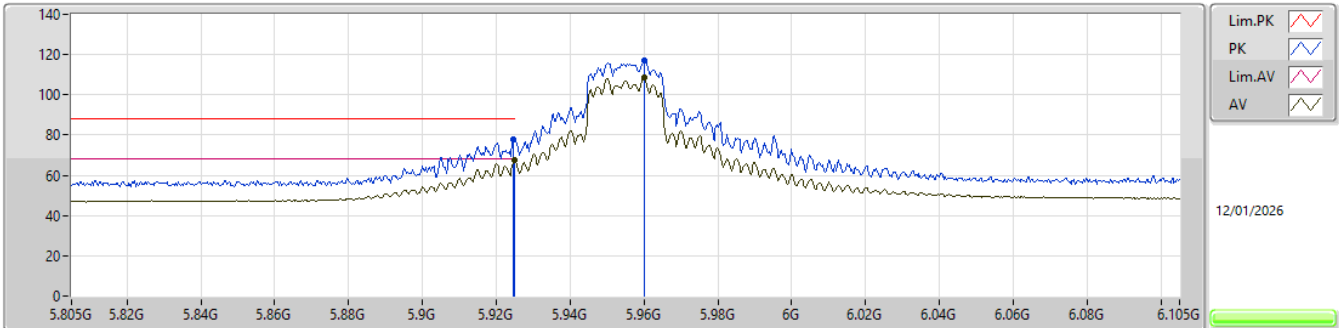


EUT_Y_4TX
Setting 84
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9247G	77.81	88.20	-10.39	71.75	3	Vertical	45	2.01	-	32.25	7.57	33.76			
RMS	5.925G	67.32	68.20	-0.88	61.25	3	Vertical	45	2.01	-	32.25	7.58	33.76			
PK	5.9601G	117.14	Inf	-Inf	110.93	3	Vertical	45	2.01	-	32.32	7.64	33.75			
RMS	5.9601G	108.45	Inf	-Inf	102.24	3	Vertical	45	2.01	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

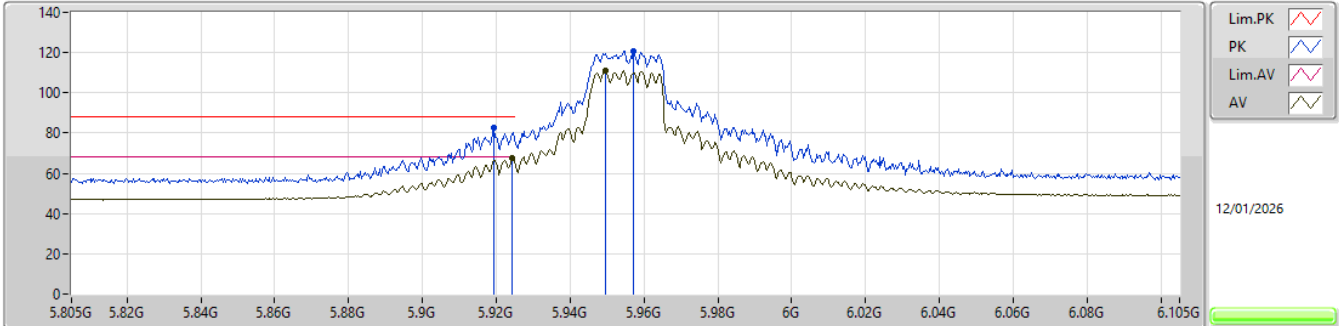


EUT_Y_4TX
Setting 84
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9193G	82.63	88.20	-5.57	76.59	3	Horizontal	288	2.32	-	32.24	7.56	33.76			
RMS	5.9244G	67.76	68.20	-0.44	61.70	3	Horizontal	288	2.32	-	32.25	7.57	33.76			
PK	5.9571G	120.87	Inf	-Inf	114.69	3	Horizontal	288	2.32	-	32.31	7.63	33.76			
RMS	5.9496G	110.83	Inf	-Inf	104.67	3	Horizontal	288	2.32	-	32.30	7.62	33.76			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

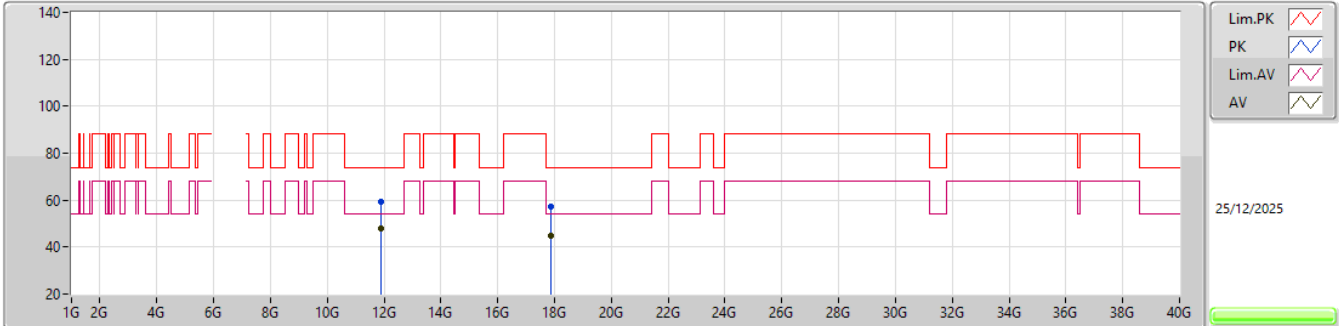


EUT_Y_4TX
Setting 92
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.90898G	59.50	74.00	-14.50	73.29	3	Vertical	7	1.83	-	39.30	12.74	65.83				
AV	11.91153G	47.82	54.00	-6.18	61.60	3	Vertical	7	1.83	-	39.30	12.75	65.83				
PK	17.86014G	57.18	74.00	-16.82	59.45	3	Vertical	49	1.78	-	46.54	15.21	64.02				
AV	17.86476G	44.99	54.00	-9.01	47.24	3	Vertical	49	1.78	-	46.56	15.21	64.02				

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

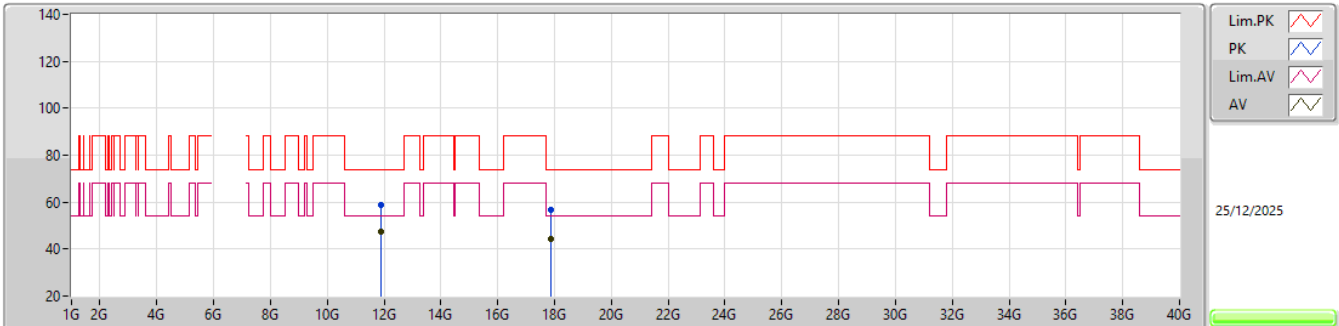EUT_Y_4TX
Setting 92
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.91141G	58.77	74.00	-15.23	72.55	3	Horizontal	36	1.60	-	39.30	12.75	65.83				
AV	11.91135G	47.64	54.00	-6.36	61.42	3	Horizontal	36	1.60	-	39.30	12.75	65.83				
PK	17.86449G	56.79	74.00	-17.21	59.04	3	Horizontal	354	1.73	-	46.56	15.21	64.02				
AV	17.87007G	44.37	54.00	-9.63	46.60	3	Horizontal	354	1.73	-	46.58	15.21	64.02				

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

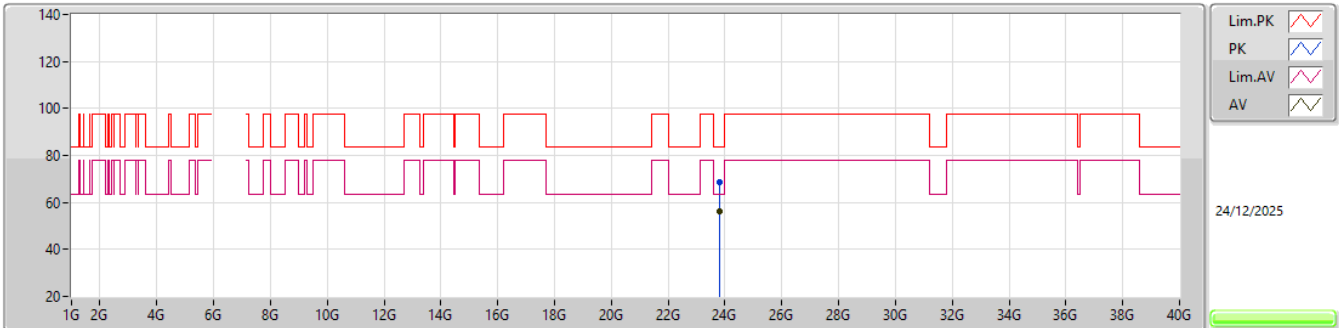EUT_Y_4TX
Setting 92
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81721G	68.56	83.54	-14.98	59.62	1	Vertical	32	1.82	-	38.90	17.94	47.90			
AV	23.81217G	56.05	63.54	-7.49	47.10	1	Vertical	32	1.82	-	38.90	17.95	47.90			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

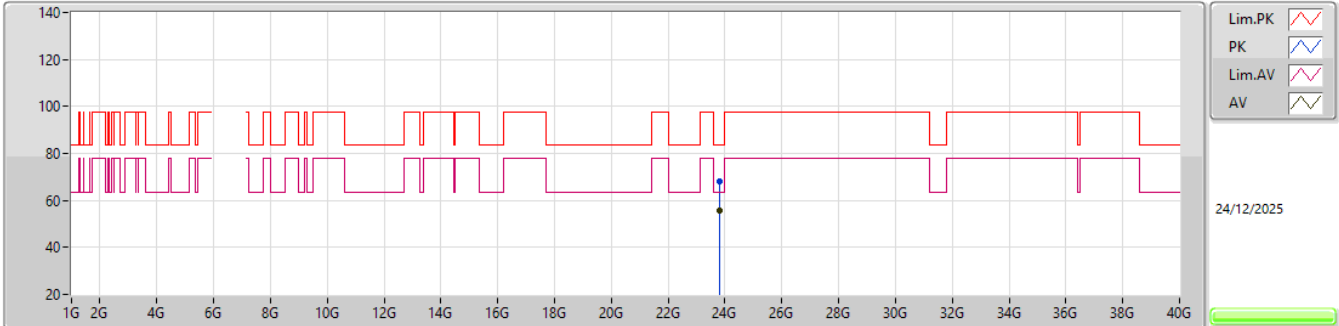


EUT_Y_4TX
Setting 92
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81937G	67.93	83.54	-15.61	58.99	1	Horizontal	318	1.54	-	38.90	17.94	47.90			
AV	23.81931G	55.51	63.54	-8.03	46.57	1	Horizontal	318	1.54	-	38.90	17.94	47.90			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6195MHz_TX

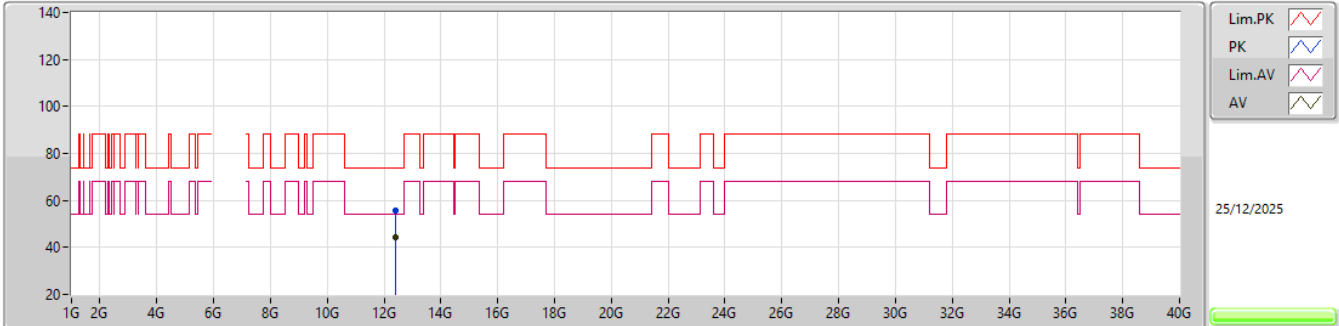


EUT_Y_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38538G	55.48	74.00	-18.52	69.54	3	Vertical	1	1.80	-	38.70	12.85	65.61			
AV	12.39045G	44.34	54.00	-9.66	58.40	3	Vertical	1	1.80	-	38.70	12.85	65.61			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6195MHz_TX

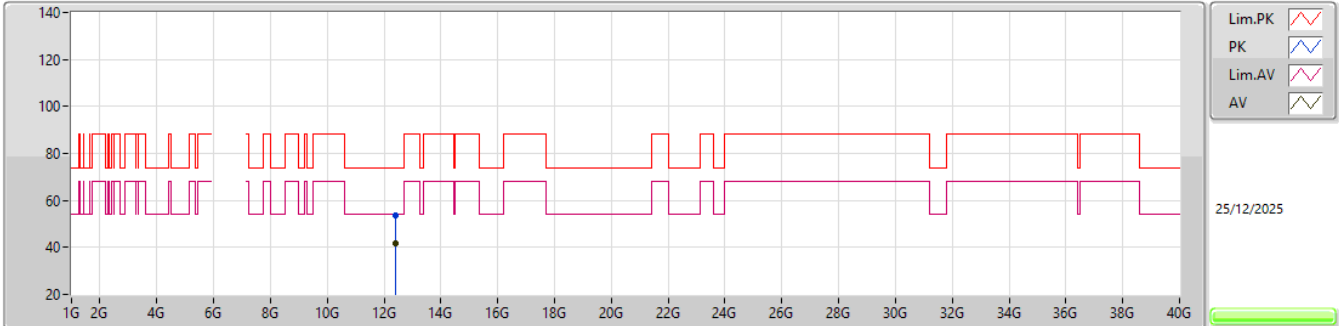


EUT V_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38979G	53.45	74.00	-20.55	67.51	3	Horizontal	126	1.57	-	38.70	12.85	65.61			
AV	12.38967G	41.58	54.00	-12.42	55.64	3	Horizontal	126	1.57	-	38.70	12.85	65.61			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6195MHz_TX

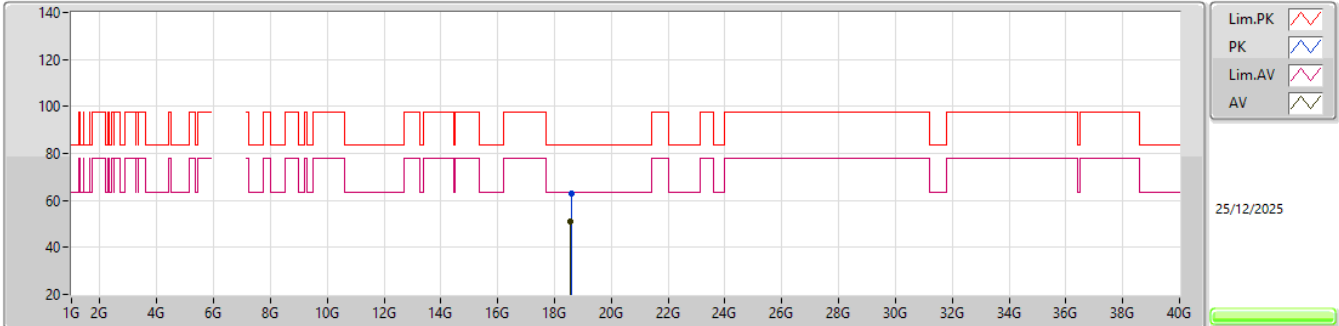


EUT_Y_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.57807G	62.70	83.54	-20.84	57.60	1	Vertical	303	1.37	-	37.61	16.14	48.65			
AV	18.57294G	50.89	63.54	-12.65	45.81	1	Vertical	303	1.37	-	37.59	16.13	48.64			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6195MHz_TX

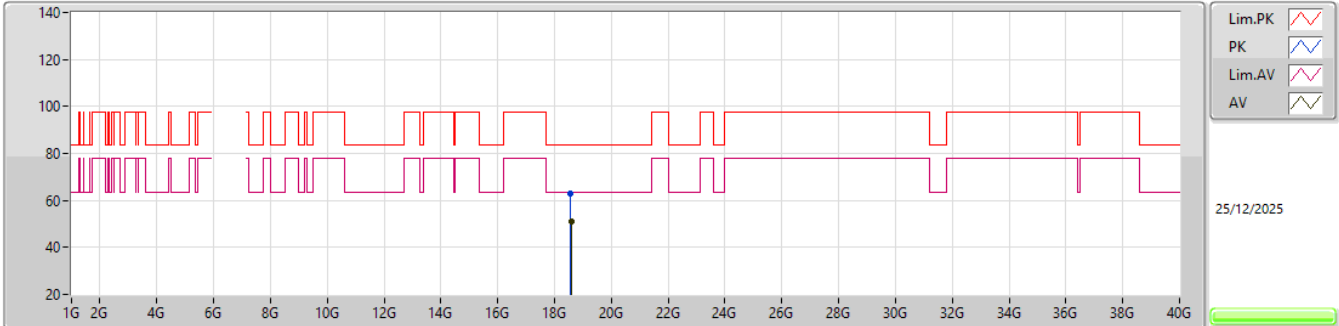


EUT_Y_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.57354G	62.93	83.54	-20.61	57.85	1	Horizontal	167	1.90	-	37.59	16.13	48.64			
AV	18.57804G	50.92	63.54	-12.62	45.82	1	Horizontal	167	1.90	-	37.61	16.14	48.65			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6415MHz_TX

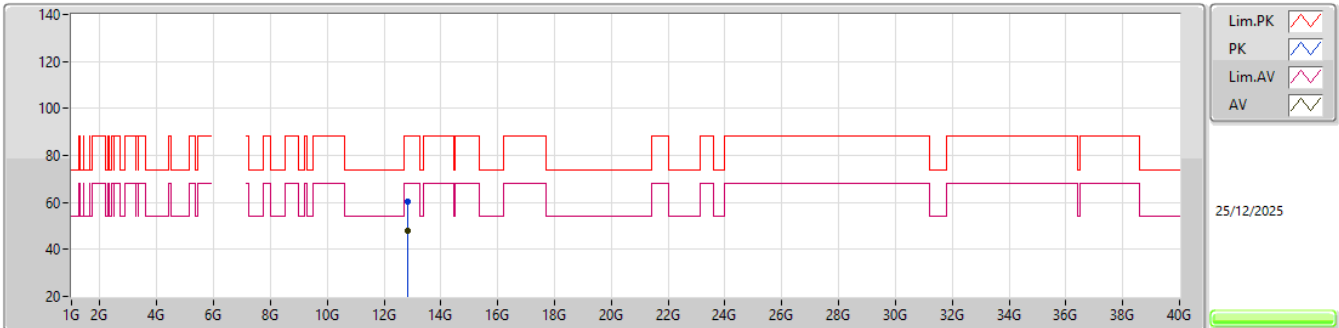


EUT_V_4TX
Setting 90
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.82736G	60.19	88.20	-28.01	73.38	3	Vertical	38	1.92	-	39.01	12.92	65.12			
RMS	12.83237G	48.05	68.20	-20.15	61.21	3	Vertical	38	1.92	-	39.03	12.92	65.11			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6415MHz_TX

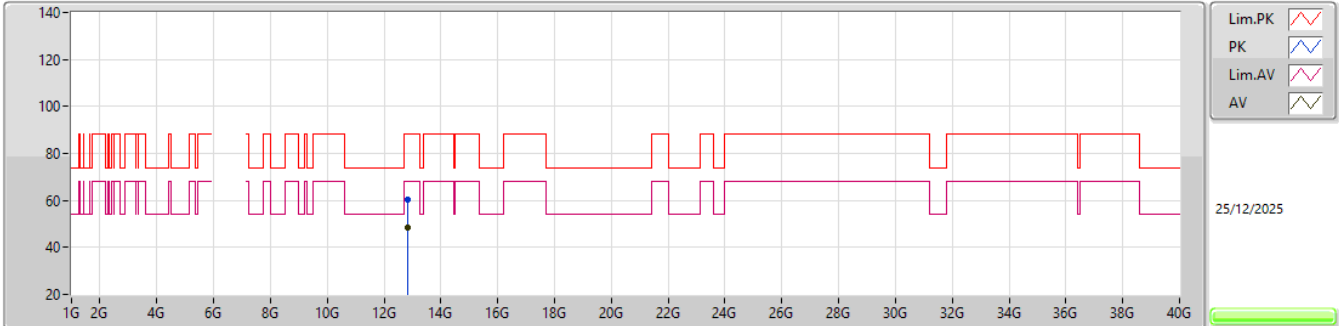


EUT_V_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83243G	60.52	88.20	-27.68	73.68	3	Horizontal	39	1.74	-	39.03	12.92	65.11			
RMS	12.83201G	48.60	68.20	-19.60	61.76	3	Horizontal	39	1.74	-	39.03	12.92	65.11			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6415MHz_TX

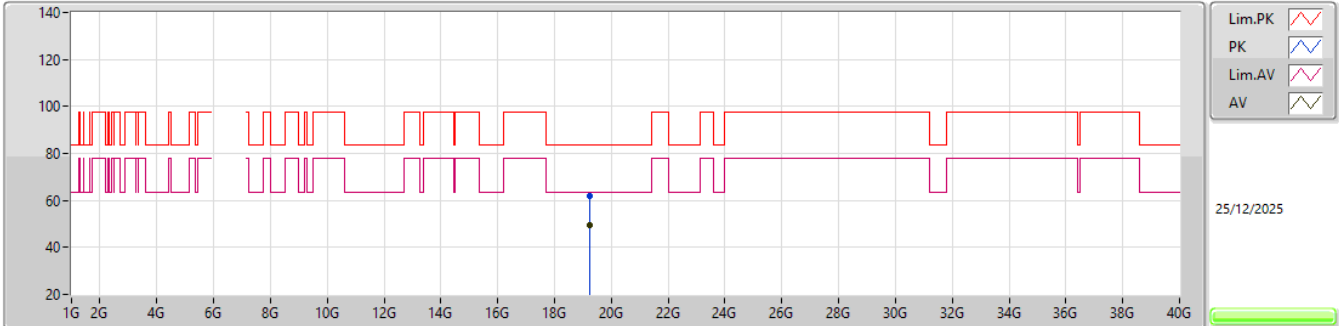


EUT_Y_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24245G	62.04	83.54	-21.50	56.53	1	Vertical	147	1.79	-	37.85	16.51	48.85			
AV	19.25886G	49.71	63.54	-13.83	44.20	1	Vertical	147	1.79	-	37.85	16.51	48.85			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6415MHz_TX

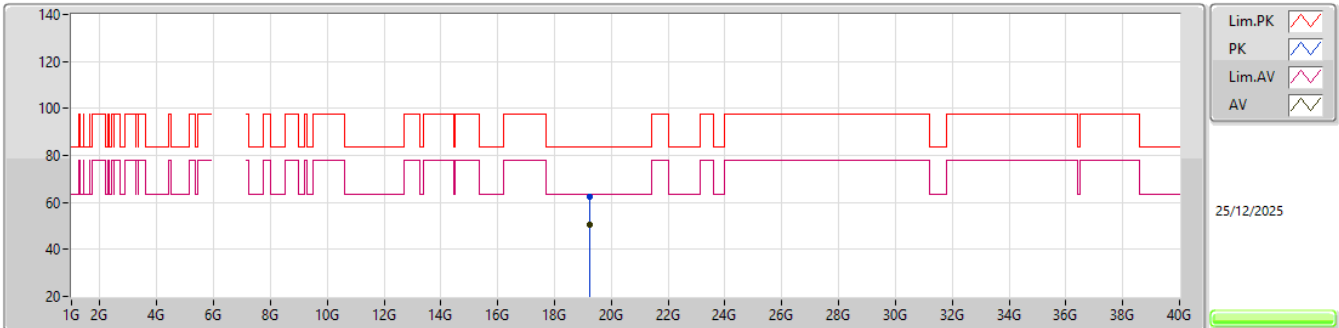


EUT_Y_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.25895G	62.18	83.54	-21.36	56.67	1	Horizontal	200	1.62	-	37.85	16.51	48.85			
AV	19.24437G	50.33	63.54	-13.21	44.80	1	Horizontal	200	1.62	-	37.87	16.51	48.85			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6535MHz_TX

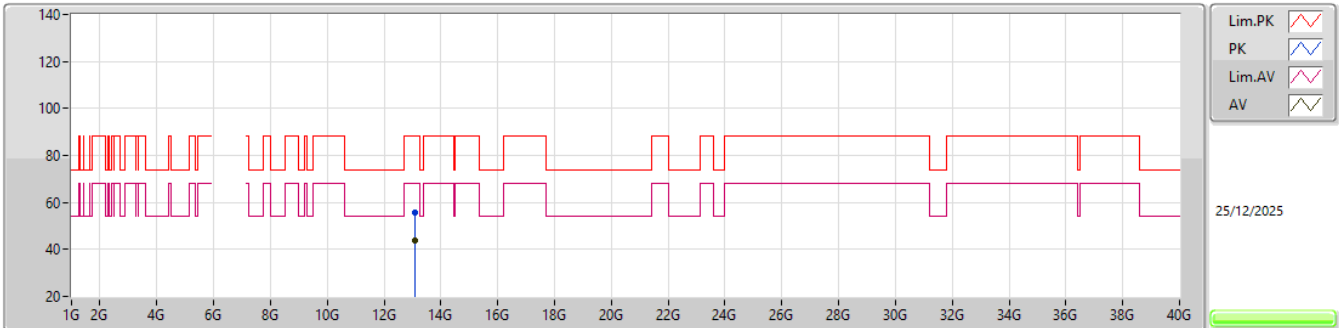


EUT_V_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06838G	55.57	88.20	-32.63	68.01	3	Vertical	354	2.05	-	39.47	12.96	64.87			
RMS	13.06838G	43.59	68.20	-24.61	56.03	3	Vertical	354	2.05	-	39.47	12.96	64.87			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6535MHz_TX

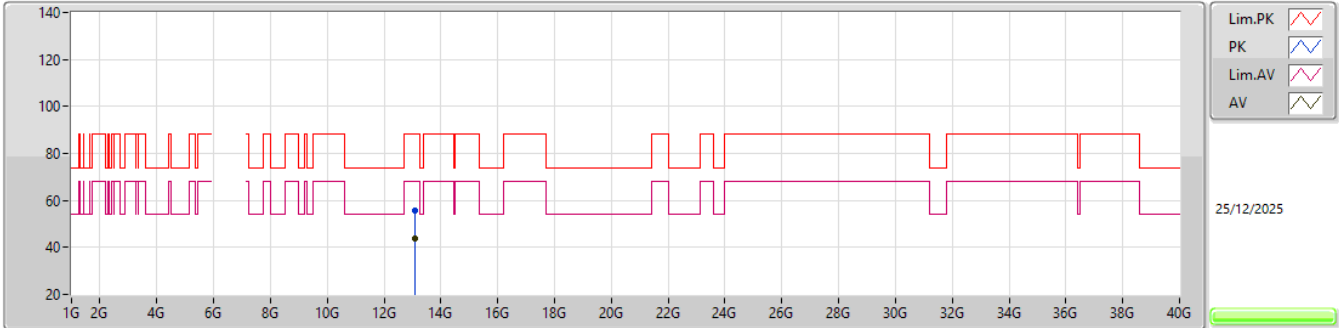


EUT_V_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0703G	55.60	88.20	-32.60	68.03	3	Horizontal	41	1.66	-	39.48	12.96	64.87			
RMS	13.06817G	43.96	68.20	-24.24	56.40	3	Horizontal	41	1.66	-	39.47	12.96	64.87			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6535MHz_TX

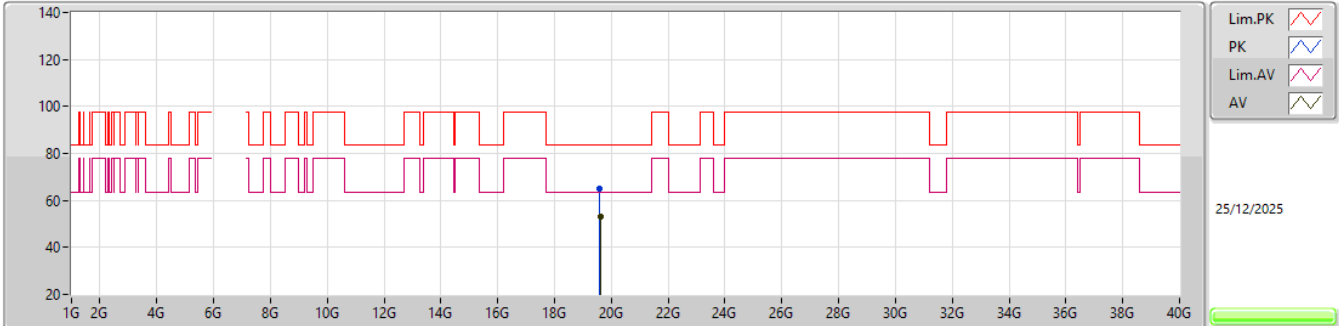


EUT_Y_4TX
Setting 90
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60269G	65.18	83.54	-18.36	59.87	1	Vertical	137	1.89	-	37.59	16.56	48.84			
AV	19.60737G	53.25	63.54	-10.29	47.94	1	Vertical	137	1.89	-	37.59	16.56	48.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6535MHz_TX

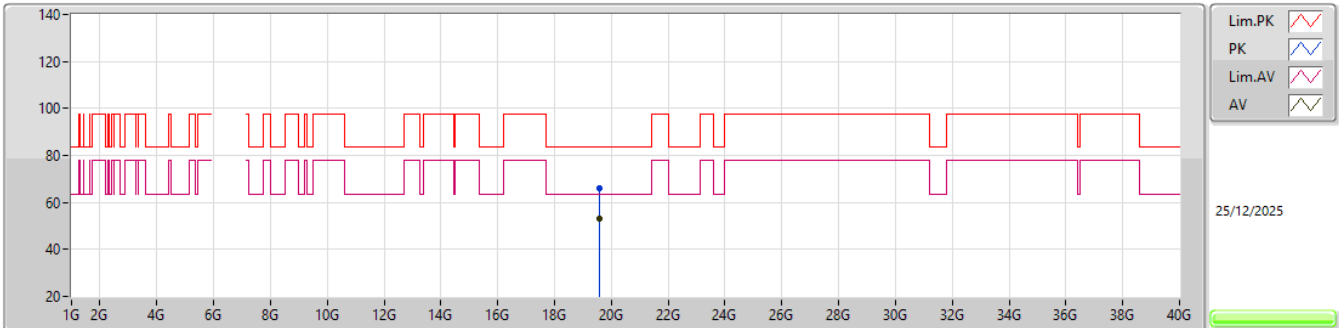


EUT_V_4TX
Setting 90
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.60287G	65.93	83.54	-17.61	60.62	1	Horizontal	81	1.86	-	37.59	16.56	48.84			
AV	19.60185G	53.17	63.54	-10.37	47.85	1	Horizontal	81	1.86	-	37.60	16.56	48.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6695MHz_TX

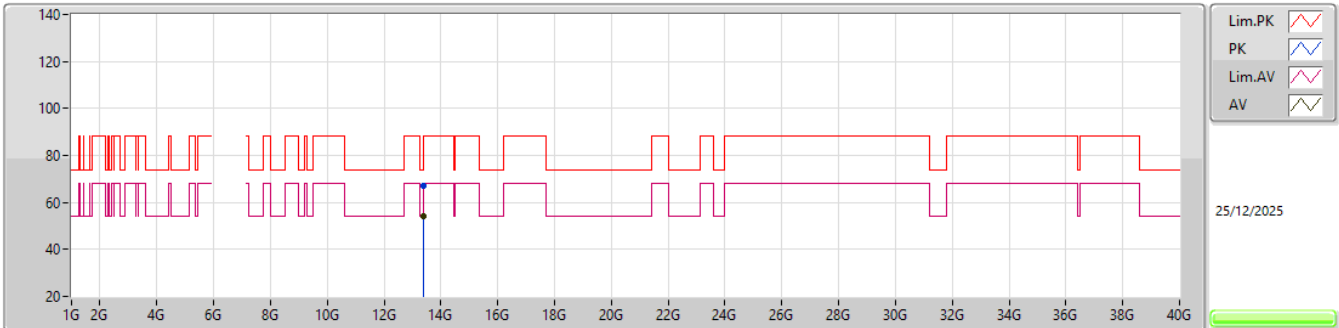


EUT Y_4TX
Setting 91
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.38502G	66.97	74.00	-7.03	78.57	3	Vertical	41	1.80	-	40.24	13.00	64.84			
AV	13.39042G	53.96	54.00	-0.04	65.53	3	Vertical	41	1.80	-	40.26	13.01	64.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6695MHz_TX

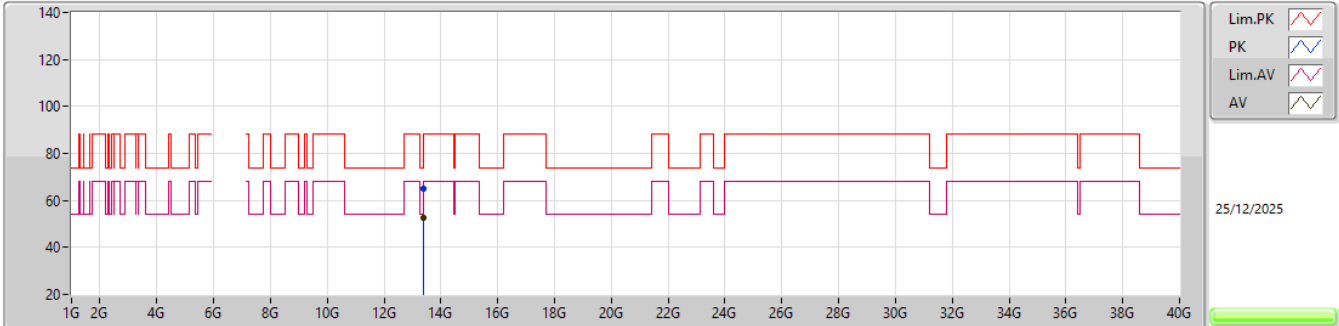


EUT_V_4TX
Setting 91
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.38958G	65.13	74.00	-8.87	76.70	3	Horizontal	301	1.80	-	40.26	13.01	64.84			
AV	13.38901G	52.54	54.00	-1.46	64.11	3	Horizontal	301	1.80	-	40.26	13.01	64.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6695MHz_TX

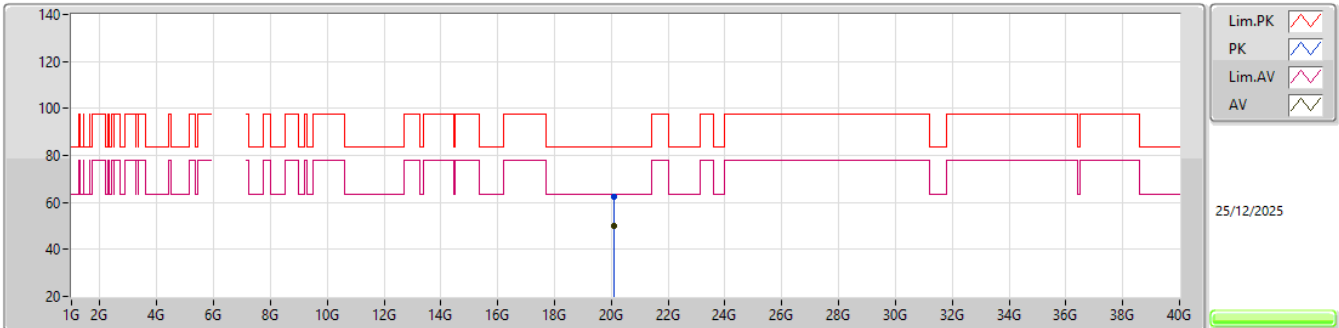


EUT_V_4TX
Setting 91
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.09907G	62.23	83.54	-21.31	57.20	1	Vertical	82	1.48	-	37.30	16.71	48.98			
AV	20.09583G	50.09	63.54	-13.45	45.07	1	Vertical	82	1.48	-	37.29	16.71	48.98			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6695MHz_TX

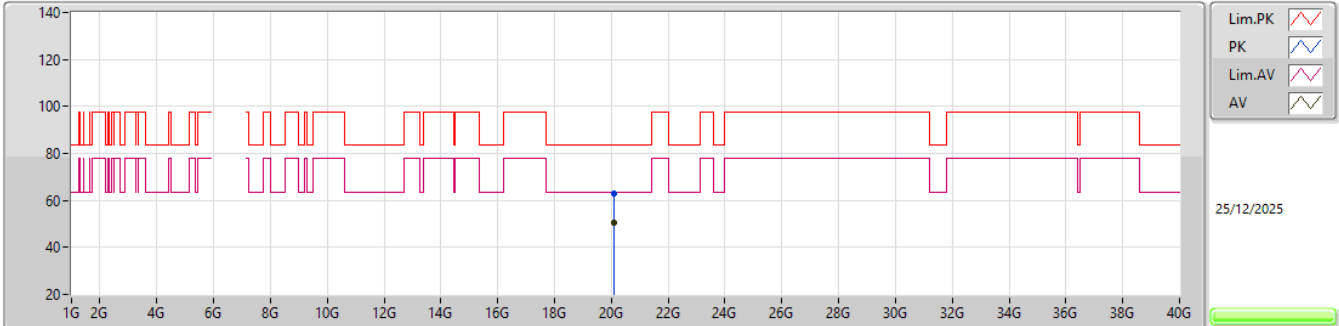


EUT_Y_4TX
Setting 91
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08494G	62.95	83.54	-20.59	57.96	1	Horizontal	327	1.43	-	37.27	16.70	48.98			
AV	20.09928G	50.27	63.54	-13.27	45.24	1	Horizontal	327	1.43	-	37.30	16.71	48.98			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

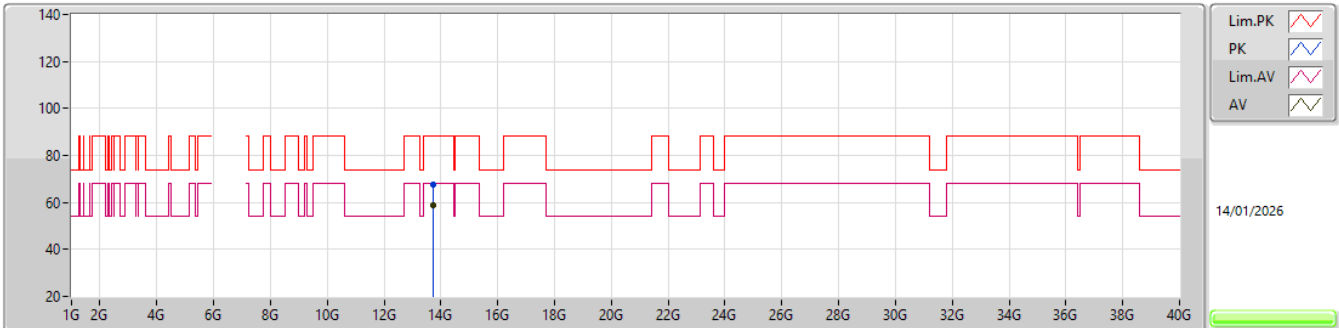


EUT_V_4TX
Setting 94
06-U-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.71372G	67.77	88.20	-20.43	50.14	3	Vertical	300	1.99	-	40.20	12.15	34.72			
RMS	13.7084G	59.04	68.20	-9.16	41.41	3	Vertical	300	1.99	-	40.20	12.15	34.72			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

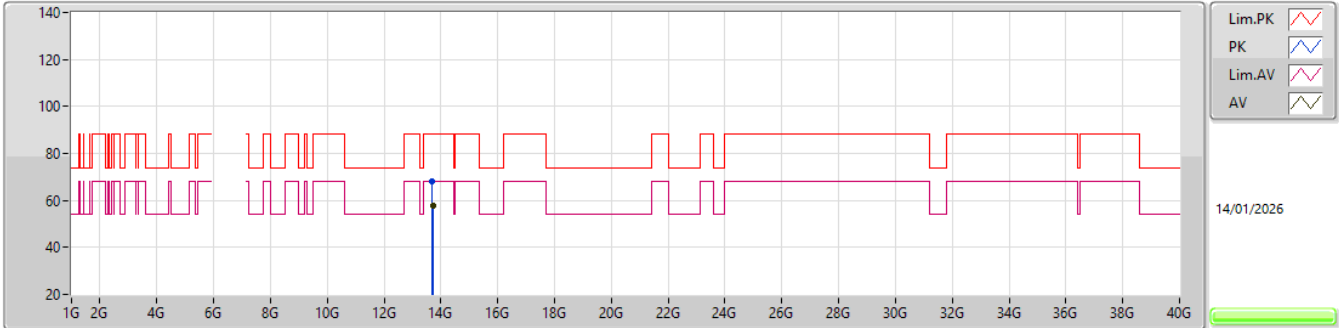


EUT_V_4TX
Setting 94
06-U-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.705G	67.87	88.20	-20.33	50.24	3	Horizontal	300	1.99	-	40.20	12.15	34.72			
RMS	13.71008G	57.71	68.20	-10.49	40.08	3	Horizontal	300	1.99	-	40.20	12.15	34.72			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

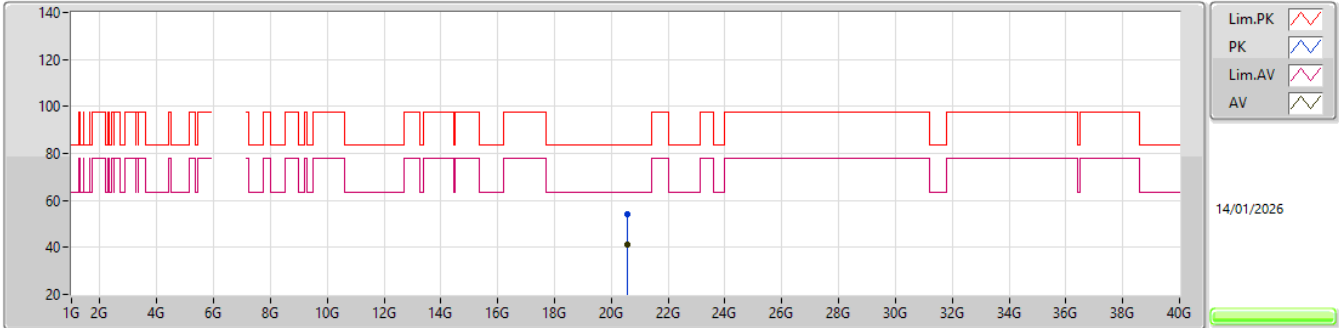


EUT_V_4TX
Setting 94
02-D-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.57418G	54.09	83.54	-29.45	48.25	1	Vertical	192	1.61	-	37.60	17.14	48.90			
RMS	20.56878G	40.98	63.54	-22.56	35.16	1	Vertical	192	1.61	-	37.58	17.14	48.90			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

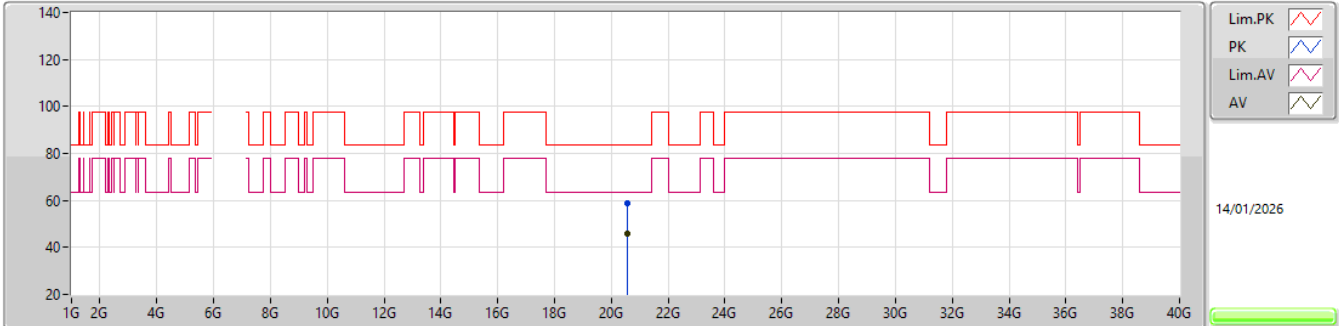


EUT_V_4TX
Setting 94
02-D-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.57901G	58.60	83.54	-24.94	52.73	1	Horizontal	214	1.59	-	37.62	17.15	48.90			
RMS	20.5689G	46.05	63.54	-17.49	40.23	1	Horizontal	214	1.59	-	37.58	17.14	48.90			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

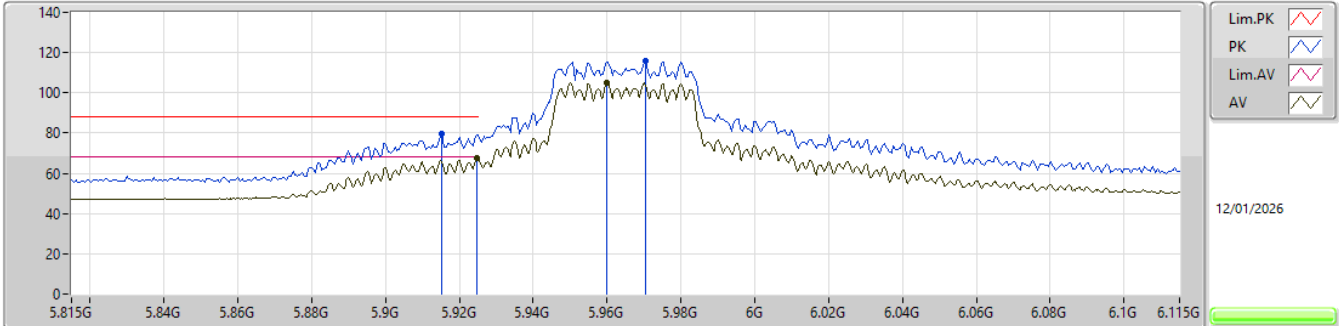


EUT_Y_4TX
Setting 82
06-U-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9152G	79.53	88.20	-8.67	73.50	3	Vertical	46	1.96	-	32.23	7.56	33.76				
RMS	5.9248G	67.70	68.20	-0.50	61.64	3	Vertical	46	1.96	-	32.25	7.57	33.76				
PK	5.9704G	116.15	Inf	-Inf	109.90	3	Vertical	46	1.96	-	32.34	7.66	33.75				
RMS	5.9599G	105.06	Inf	-Inf	98.85	3	Vertical	46	1.96	-	32.32	7.64	33.75				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

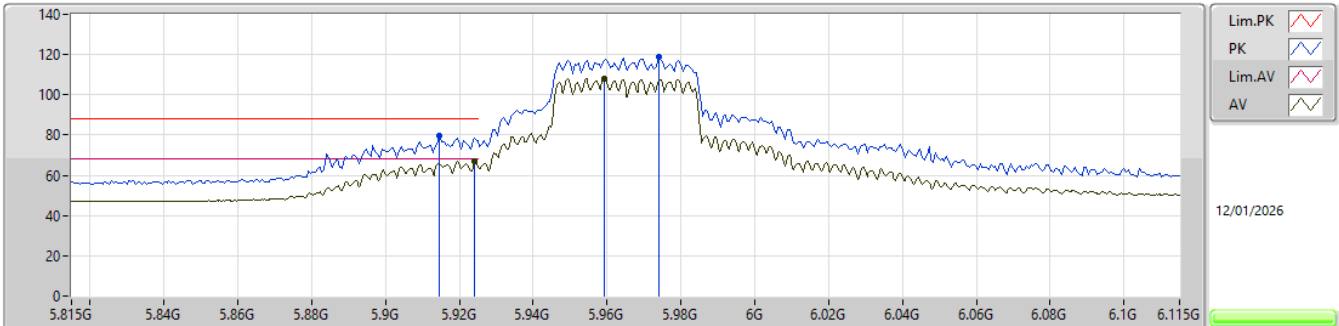


EUT_Y_4TX
Setting 82
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9146G	79.67	88.20	-8.53	73.64	3	Horizontal	283	2.33	-	32.23	7.56	33.76			
RMS	5.9242G	66.84	68.20	-1.36	60.78	3	Horizontal	283	2.33	-	32.25	7.57	33.76			
PK	5.974G	118.59	Inf	-Inf	112.33	3	Horizontal	283	2.33	-	32.35	7.66	33.75			
RMS	5.9593G	108.25	Inf	-Inf	102.04	3	Horizontal	283	2.33	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

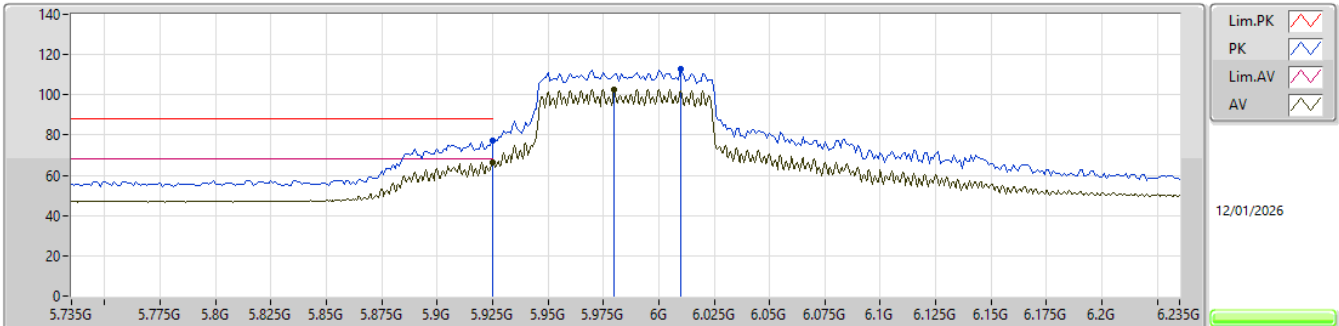


EUT_Y_4TX
Setting 87
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	76.97	88.20	-11.23	70.90	3	Vertical	45	2.07	-	32.25	7.58	33.76			
RMS	5.925G	66.58	68.20	-1.62	60.51	3	Vertical	45	2.07	-	32.25	7.58	33.76			
PK	6.01G	113.00	Inf	-Inf	106.62	3	Vertical	45	2.07	-	32.42	7.70	33.74			
RMS	5.98G	102.83	Inf	-Inf	96.55	3	Vertical	45	2.07	-	32.36	7.67	33.75			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

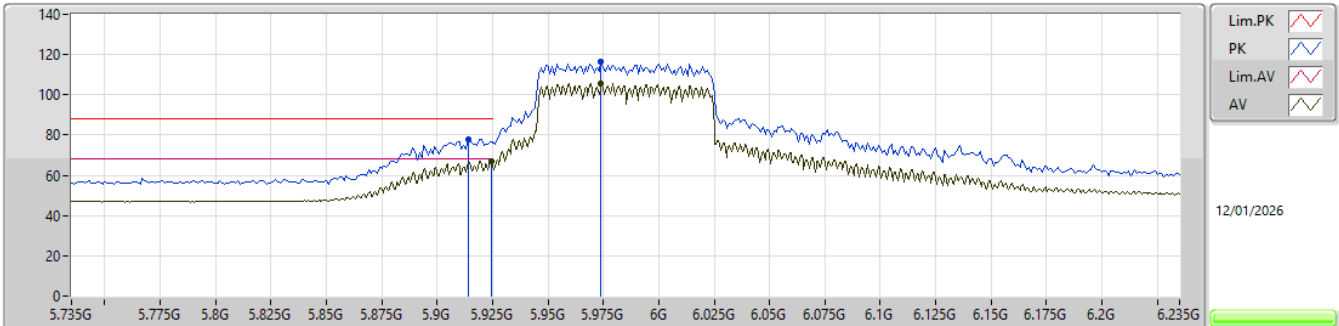


EUT_Y_4TX
Setting 87
06-U-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.914G	78.05	88.20	-10.15	72.02	3	Horizontal	286	2.30	-	32.23	7.56	33.76			
RMS	5.9245G	67.24	68.20	-0.96	61.18	3	Horizontal	286	2.30	-	32.25	7.57	33.76			
PK	5.974G	116.68	Inf	-Inf	110.42	3	Horizontal	286	2.30	-	32.35	7.66	33.75			
RMS	5.974G	105.49	Inf	-Inf	99.23	3	Horizontal	286	2.30	-	32.35	7.66	33.75			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

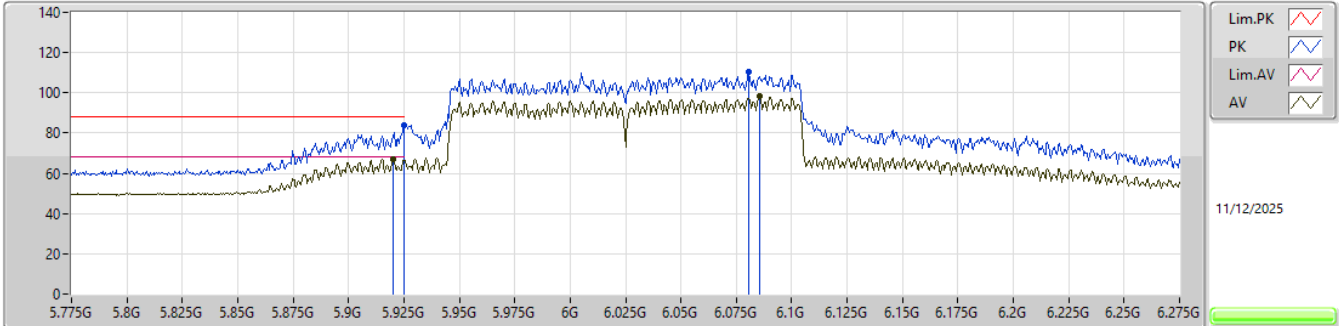


EUT_Y_4TX
SET 82
80\96\76\86\81\83\82
4.02\ -10.77\8.22\ -2.86\2.23\ -0.12\1.35

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	83.67	88.20	-4.53	73.33	3	Vertical	60	1.80	82	34.10	8.68	32.44			
RMS	5.92G	66.85	68.20	-1.35	56.52	3	Vertical	60	1.80	82	34.10	8.67	32.44			
PK	6.0805G	110.39	Inf	-Inf	99.88	3	Vertical	60	1.80	82	34.10	8.84	32.43			
RMS	6.0855G	98.08	Inf	-Inf	87.57	3	Vertical	60	1.80	82	34.10	8.84	32.43			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

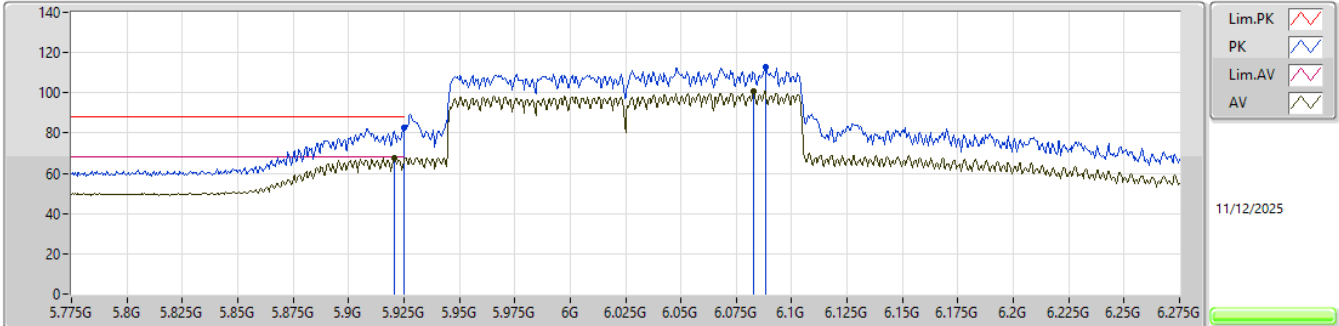


EUT_Y_4TX
SET 80
82\75\81\78\79\80
-1.51\6.84\0.15\3.02\1.56\0.82

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	82.71	88.20	-5.49	72.37	3	Horizontal	300	3.00	80	34.10	8.68	32.44			
RMS	5.9205G	67.38	68.20	-0.82	57.05	3	Horizontal	300	3.00	80	34.10	8.67	32.44			
PK	6.088G	112.79	Inf	-Inf	102.28	3	Horizontal	300	3.00	80	34.10	8.84	32.43			
RMS	6.083G	101.06	Inf	-Inf	90.55	3	Horizontal	300	3.00	80	34.10	8.84	32.43			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6105MHz_TX

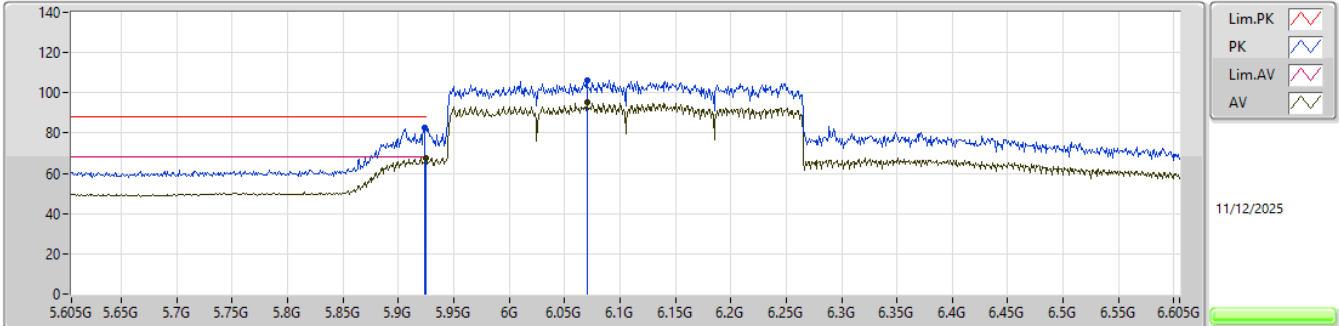


EUT_Y_4TX
SET 87
80\107\76\91\84\87
6.76\12.62\8.62\2.76\2.54\0.45

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.924G	82.78	88.20	-5.42	72.44	3	Vertical	55	1.80	87	34.10	8.68	32.44			
RMS	5.925G	67.75	68.20	-0.45	57.41	3	Vertical	55	1.80	87	34.10	8.68	32.44			
PK	6.07G	106.27	Inf	-Inf	95.77	3	Vertical	55	1.80	87	34.10	8.83	32.43			
RMS	6.07G	95.06	Inf	-Inf	84.56	3	Vertical	55	1.80	87	34.10	8.83	32.43			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6105MHz_TX

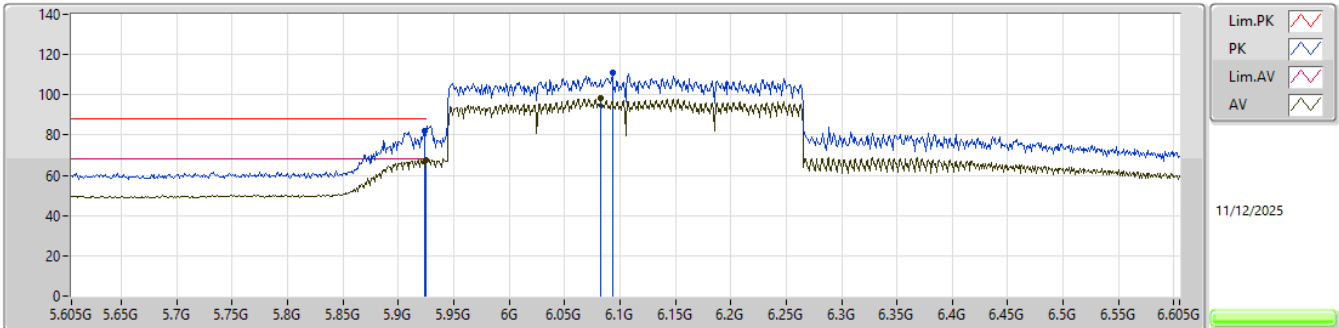


EUT_Y_4TX
SET 87
87
0.47

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.924G	81.80	88.20	-6.40	71.46	3	Horizontal	292	3.00	87	34.10	8.68	32.44			
RMS	5.925G	67.73	68.20	-0.47	57.39	3	Horizontal	292	3.00	87	34.10	8.68	32.44			
PK	6.093G	110.99	Inf	-Inf	100.47	3	Horizontal	292	3.00	87	34.10	8.85	32.43			
RMS	6.083G	98.27	Inf	-Inf	87.76	3	Horizontal	292	3.00	87	34.10	8.84	32.43			

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5955MHz_TX

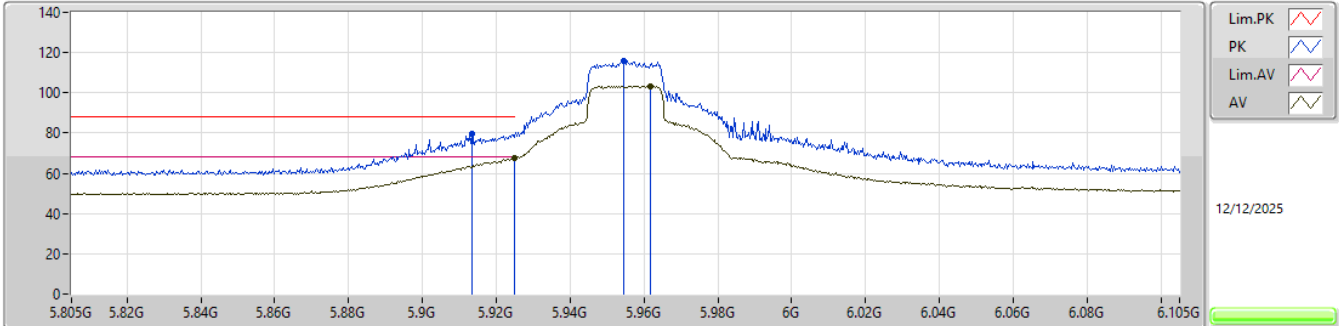


EUT_Y_4TX
SET 91
80\108\87\97\92\90\91
12.51\ -5.46\4.34\ -3.47\ -0.95\2.04\0.57

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.9133G	79.91	88.20	-8.29	69.59	3	Vertical	52	1.80	91	34.10	8.66	32.44					
RMS	5.925G	67.63	68.20	-0.57	57.29	3	Vertical	52	1.80	91	34.10	8.68	32.44					
PK	5.9544G	115.73	Inf	-Inf	105.36	3	Vertical	52	1.80	91	34.10	8.71	32.44					
RMS	5.9616G	103.38	Inf	-Inf	93.00	3	Vertical	52	1.80	91	34.10	8.72	32.44					

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5955MHz_TX

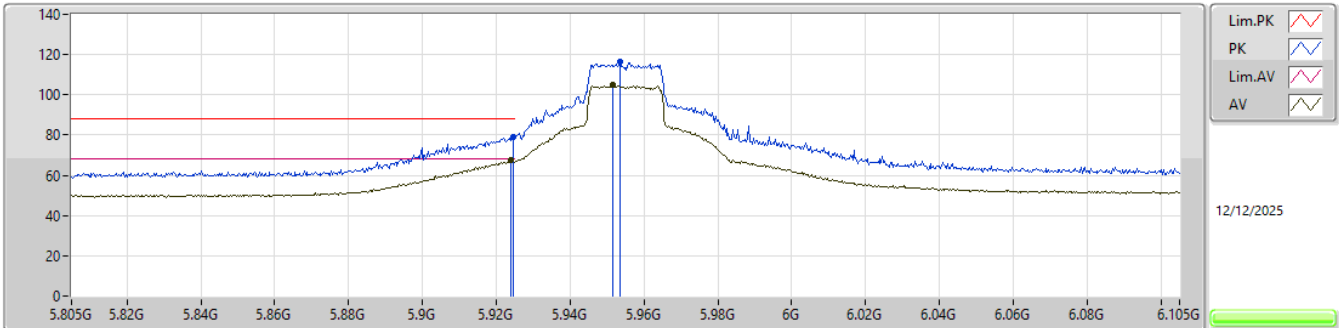


EUT_Y_4TX
SET 91
91
0.64

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9247G	78.87	88.20	-9.33	68.53	3	Horizontal	289	1.80	91	34.10	8.68	32.44			
RMS	5.9241G	67.56	68.20	-0.64	57.22	3	Horizontal	289	1.80	91	34.10	8.68	32.44			
PK	5.9535G	116.62	Inf	-Inf	106.25	3	Horizontal	289	1.80	91	34.10	8.71	32.44			
RMS	5.9514G	104.86	Inf	-Inf	94.49	3	Horizontal	289	1.80	91	34.10	8.71	32.44			

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5965MHz_TX

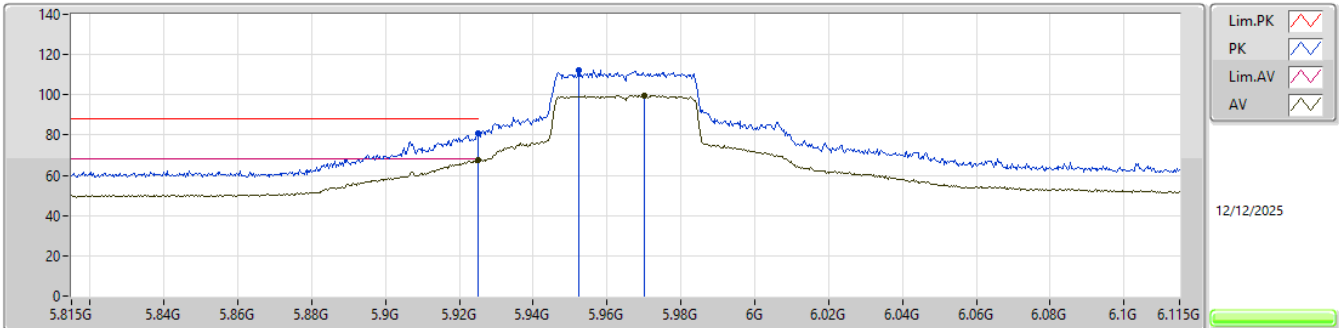


EUT Y_4TX
Setting 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	80.92	88.20	-7.28	70.58	3	Vertical	56	1.80	85	34.10	8.68	32.44			
RMS	5.925G	67.32	68.20	-0.88	56.98	3	Vertical	56	1.80	85	34.10	8.68	32.44			
PK	5.9524G	112.43	Inf	-Inf	102.06	3	Vertical	56	1.80	85	34.10	8.71	32.44			
RMS	5.9701G	99.83	Inf	-Inf	89.44	3	Vertical	56	1.80	85	34.10	8.73	32.44			

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5965MHz_TX

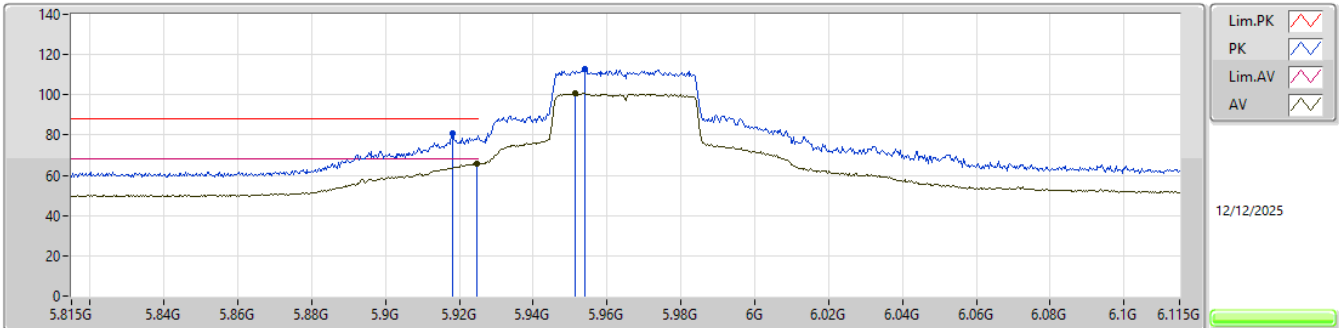


EUT_Y_4TX
Setting 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9182G	80.64	88.20	-7.56	70.31	3	Horizontal	288	1.80	85	34.10	8.67	32.44			
RMS	5.9248G	66.06	68.20	-2.14	55.72	3	Horizontal	288	1.80	85	34.10	8.68	32.44			
PK	5.9539G	112.68	Inf	-Inf	102.31	3	Horizontal	288	1.80	85	34.10	8.71	32.44			
RMS	5.9512G	100.66	Inf	-Inf	90.29	3	Horizontal	288	1.80	85	34.10	8.71	32.44			

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5985MHz_TX

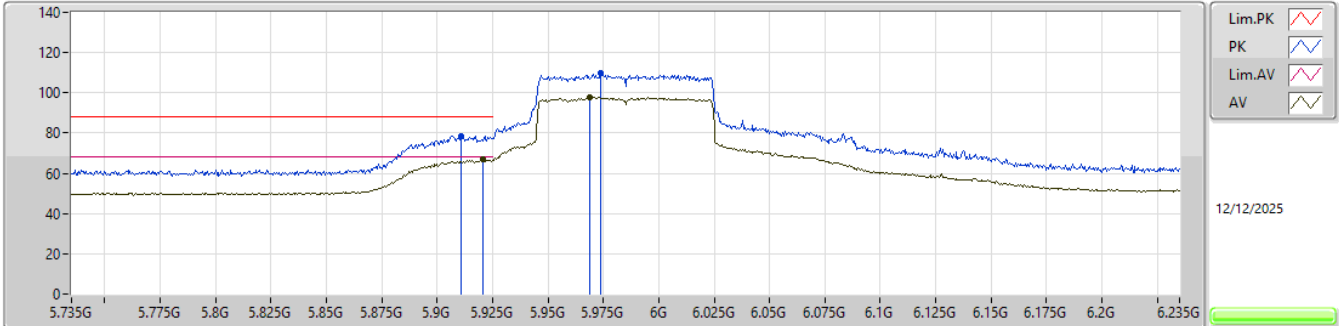


EUT_Y_4TX
SET 90
80\108\76\92\84\88\90\91\90
14.92\10.51\15.81\10.93\10.73\4.46\1.53\1.26\1.48

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.911G	78.51	88.20	-9.69	68.19	3	Vertical	54	1.80	90	34.10	8.66	32.44
RMS	5.9205G	66.72	68.20	-1.48	56.39	3	Vertical	54	1.80	90	34.10	8.67	32.44
PK	5.9735G	110.04	Inf	-Inf	99.64	3	Vertical	54	1.80	90	34.10	8.74	32.44
RMS	5.969G	97.94	Inf	-Inf	87.55	3	Vertical	54	1.80	90	34.10	8.73	32.44

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5985MHz_TX

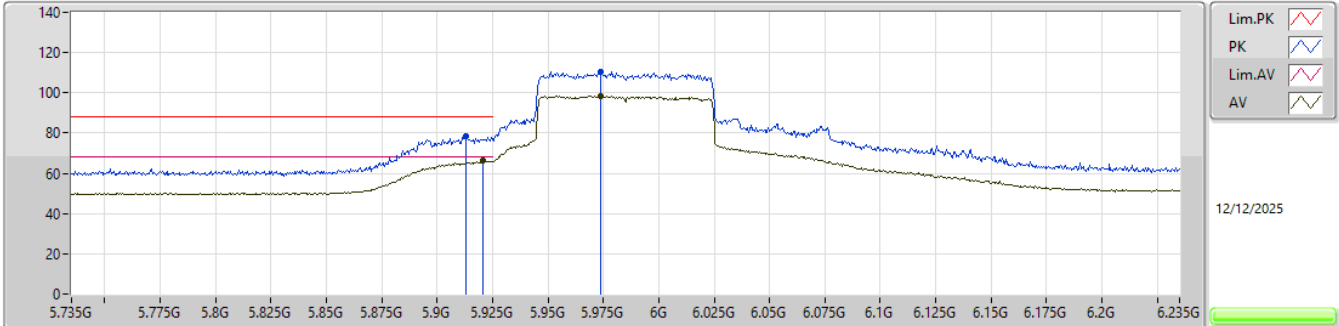


EUT_Y_4TX
SET 90
90
2.11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.913G	78.73	88.20	-9.47	68.41	3	Horizontal	290	1.80	90	34.10	8.66	32.44			
RMS	5.9205G	66.09	68.20	-2.11	55.76	3	Horizontal	290	1.80	90	34.10	8.67	32.44			
PK	5.9735G	110.57	Inf	-Inf	100.17	3	Horizontal	290	1.80	90	34.10	8.74	32.44			
RMS	5.9735G	98.64	Inf	-Inf	88.24	3	Horizontal	290	1.80	90	34.10	8.74	32.44			

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

6025MHz_TX

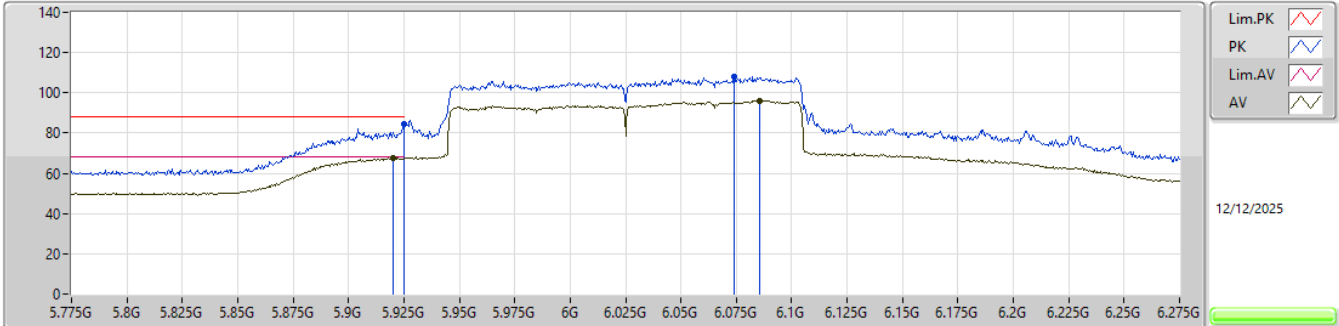


EUT_Y_4TX
SET 85
80\108\76\92\84\88\86\85
7.05\ -11.21\7.93\ -5.32\1.45\ -2.16\ -0.18\0.79

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	84.50	88.20	-3.70	74.16	3	Vertical	63	1.80	85	34.10	8.68	32.44			
RMS	5.92G	67.41	68.20	-0.79	57.08	3	Vertical	63	1.80	85	34.10	8.67	32.44			
PK	6.074G	108.16	Inf	-Inf	97.66	3	Vertical	63	1.80	85	34.10	8.83	32.43			
RMS	6.0855G	96.21	Inf	-Inf	85.70	3	Vertical	63	1.80	85	34.10	8.84	32.43			

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

6025MHz_TX

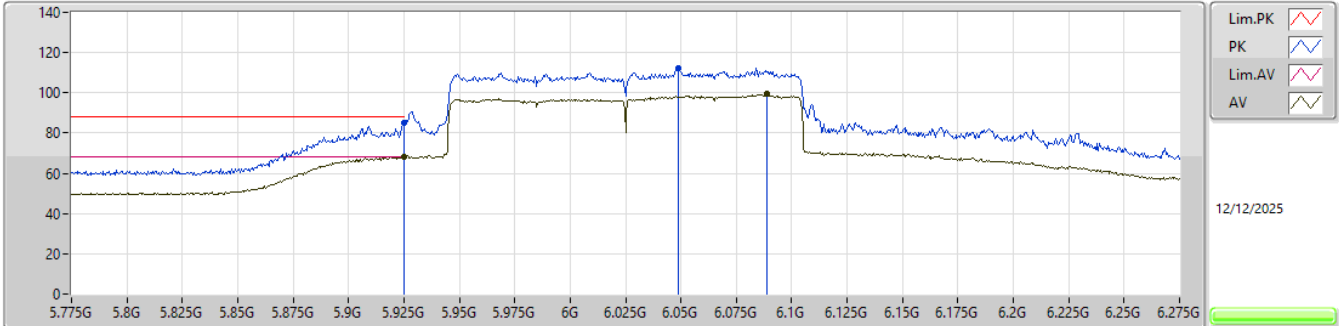


EUT_Y_4TX
SET 82
85\74\84\79\81\82
-2.54\6.02\2.02\3.58\1.38\0.10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	84.90	88.20	-3.30	74.56	3	Horizontal	296	3.00	82	34.10	8.68	32.44			
RMS	5.925G	68.10	68.20	-0.10	57.76	3	Horizontal	296	3.00	82	34.10	8.68	32.44			
PK	6.049G	112.07	Inf	-Inf	101.59	3	Horizontal	296	3.00	82	34.10	8.81	32.43			
RMS	6.089G	99.30	Inf	-Inf	88.78	3	Horizontal	296	3.00	82	34.10	8.85	32.43			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

6105MHz_TX

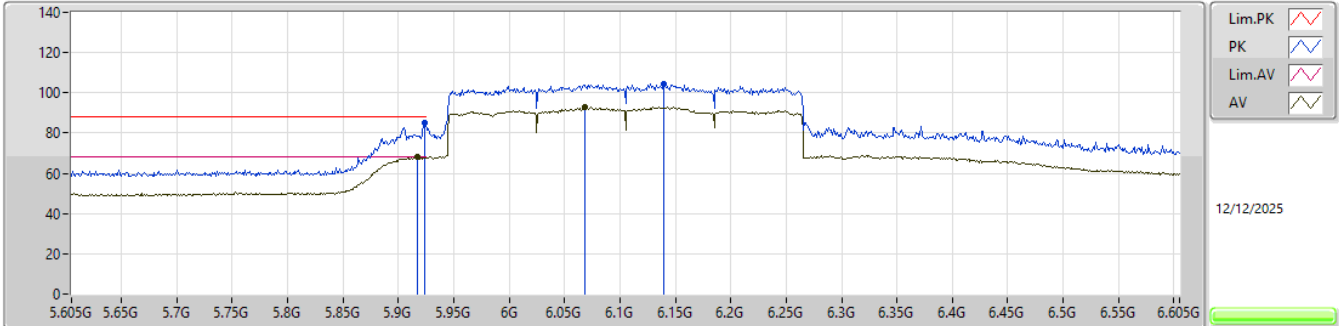


EUT Y_4TX
Setting 90

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.924G	85.26	88.20	-2.94	74.92	3	Vertical	52	1.80	92	34.10	8.68	32.44			
RMS	5.917G	67.89	68.20	-0.31	57.56	3	Vertical	52	1.80	92	34.10	8.67	32.44			
PK	6.14G	104.25	Inf	-Inf	93.60	3	Vertical	52	1.80	92	34.18	8.89	32.42			
RMS	6.068G	92.89	Inf	-Inf	82.39	3	Vertical	52	1.80	92	34.10	8.83	32.43			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

6105MHz_TX

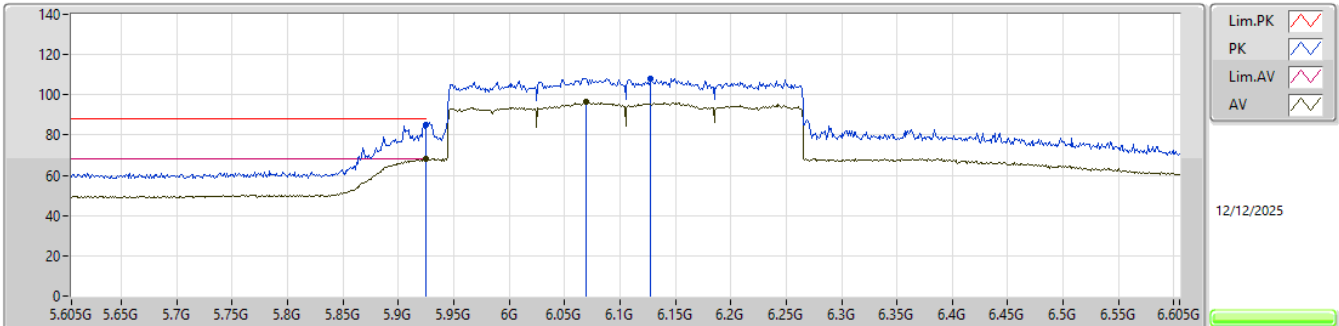EUT Y_4TX
Setting 90

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	84.80	88.20	-3.40	74.46	3	Horizontal	291	3.00	89	34.10	8.68	32.44			
RMS	5.925G	68.03	68.20	-0.17	57.69	3	Horizontal	291	3.00	89	34.10	8.68	32.44			
PK	6.128G	108.21	Inf	-Inf	97.59	3	Horizontal	291	3.00	89	34.16	8.88	32.42			
RMS	6.069G	96.53	Inf	-Inf	86.03	3	Horizontal	291	3.00	89	34.10	8.83	32.43			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1.(MCS0)_4TX	Pass	RMS	5.925G	68.19	68.20	-0.01	3	Vertical	61	1.58	-

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

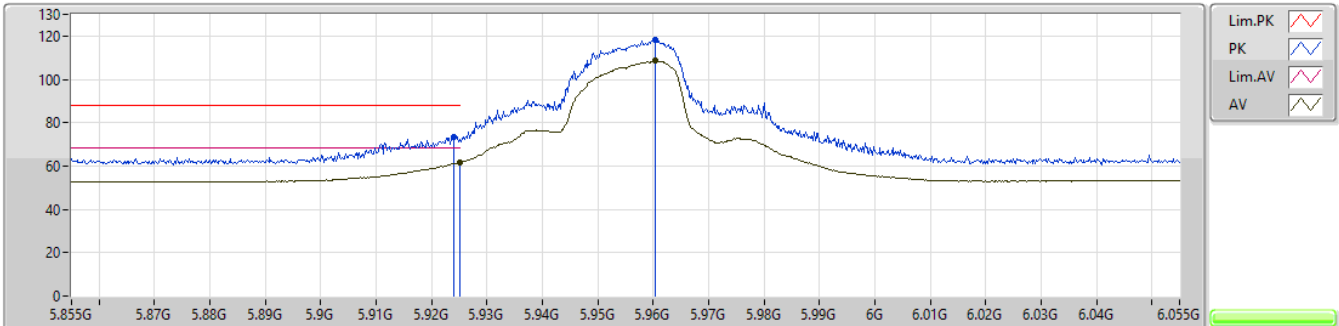


EUT_Y_2TX
Setting 87
02-D-K-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.924G	73.45	88.20	-14.75	61.31	3	Vertical	167	2.92	-	34.15	8.15	30.16			
RMS	5.925G	61.65	68.20	-6.55	49.51	3	Vertical	167	2.92	-	34.15	8.15	30.16			
PK	5.9604G	118.15	Inf	-Inf	105.93	3	Vertical	167	2.92	-	34.22	8.14	30.14			
RMS	5.9604G	108.46	Inf	-Inf	96.24	3	Vertical	167	2.92	-	34.22	8.14	30.14			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

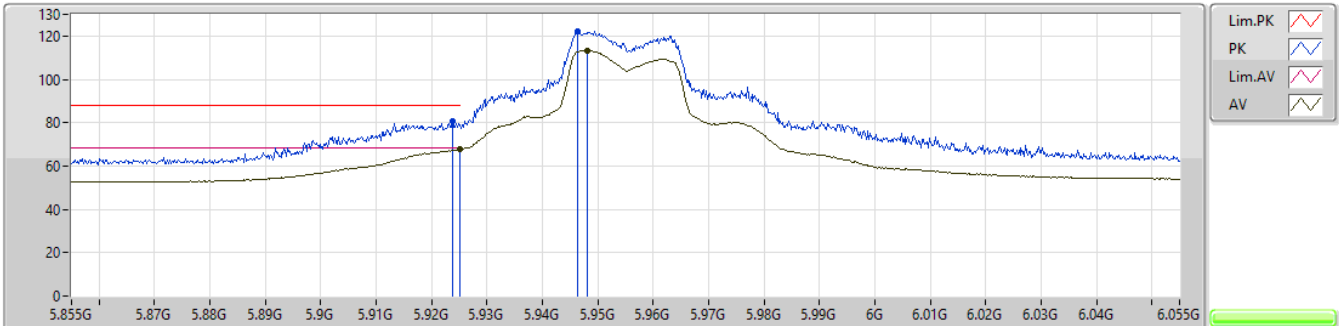


EUT_Y_2TX
Setting 87
02-D-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9238G	80.45	88.20	-7.75	68.31	3	Horizontal	257	2.13	-	34.15	8.15	30.16			
RMS	5.925G	67.55	68.20	-0.65	55.41	3	Horizontal	257	2.13	-	34.15	8.15	30.16			
PK	5.9464G	122.38	Inf	-Inf	110.20	3	Horizontal	257	2.13	-	34.19	8.14	30.15			
RMS	5.9482G	113.20	Inf	-Inf	101.01	3	Horizontal	257	2.13	-	34.20	8.14	30.15			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

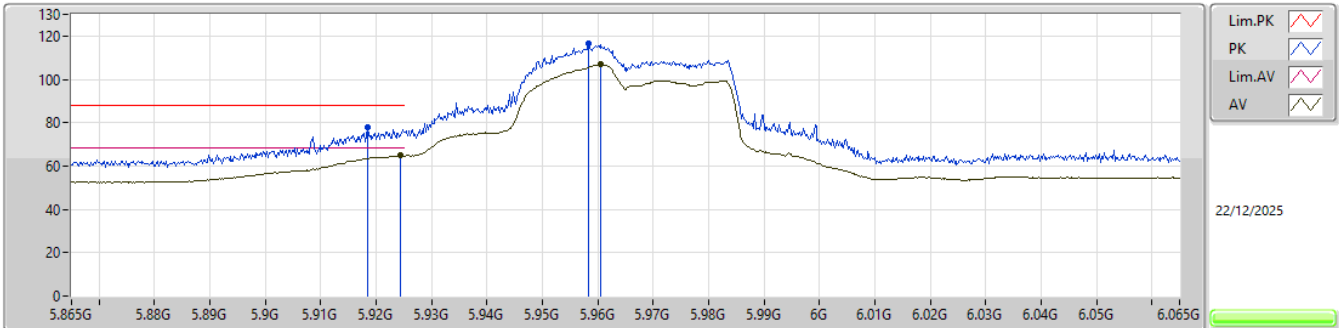


EUT_Y_2TX
Setting 81
02-D-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9184G	77.70	88.20	-10.50	65.56	3	Vertical	168	2.93	-	34.14	8.16	30.16			
RMS	5.9244G	64.74	68.20	-3.46	52.60	3	Vertical	168	2.93	-	34.15	8.15	30.16			
PK	5.9584G	116.67	Inf	-Inf	104.45	3	Vertical	168	2.93	-	34.22	8.14	30.14			
RMS	5.9604G	106.80	Inf	-Inf	94.58	3	Vertical	168	2.93	-	34.22	8.14	30.14			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


5965MHz_TX

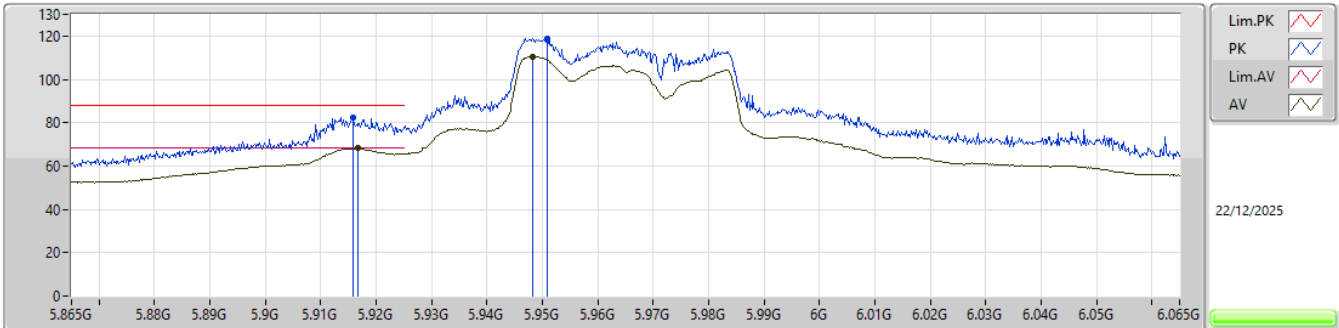EUT_Y_2TX
Setting 81
02-D-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9158G	82.42	88.20	-5.78	70.29	3	Horizontal	256	2.14	-	34.13	8.16	30.16			
RMS	5.9168G	68.18	68.20	-0.02	56.05	3	Horizontal	256	2.14	-	34.13	8.16	30.16			
PK	5.9508G	119.01	Inf	-Inf	106.82	3	Horizontal	256	2.14	-	34.20	8.14	30.15			
RMS	5.9482G	110.30	Inf	-Inf	98.11	3	Horizontal	256	2.14	-	34.20	8.14	30.15			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5985MHz_TX

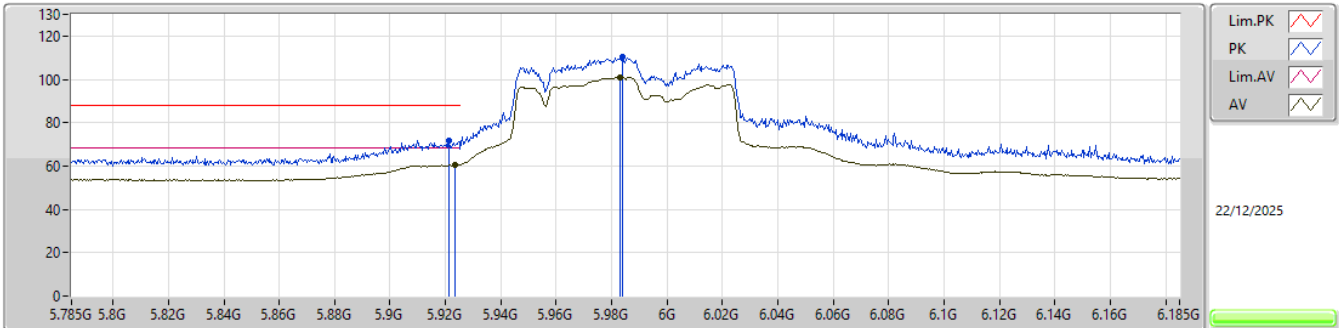


EUT_Y_2TX
Setting 89
02-D-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9214G	71.72	88.20	-16.48	59.58	3	Vertical	347	1.22	-	34.14	8.16	30.16			
RMS	5.9234G	60.39	68.20	-7.81	48.25	3	Vertical	347	1.22	-	34.15	8.15	30.16			
PK	5.9838G	110.41	Inf	-Inf	98.15	3	Vertical	347	1.22	-	34.27	8.13	30.14			
RMS	5.983G	101.04	Inf	-Inf	88.78	3	Vertical	347	1.22	-	34.27	8.13	30.14			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5985MHz_TX

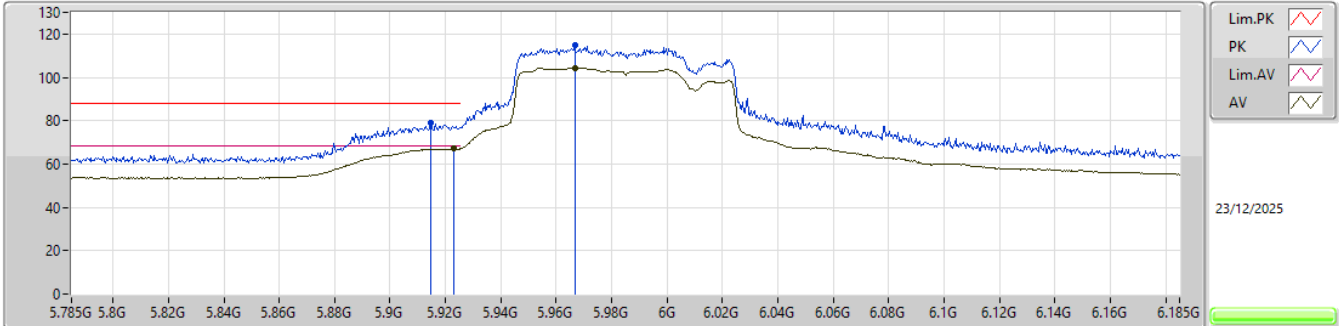


EUT_Y_2TX
Setting 89
02-D-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9146G	79.23	88.20	-8.97	67.10	3	Horizontal	86	1.94	-	34.13	8.16	30.16
RMS	5.923G	67.08	68.20	-1.12	54.94	3	Horizontal	86	1.94	-	34.15	8.15	30.16
PK	5.9666G	114.67	Inf	-Inf	102.44	3	Horizontal	86	1.94	-	34.23	8.14	30.14
RMS	5.967G	104.32	Inf	-Inf	92.10	3	Horizontal	86	1.94	-	34.23	8.13	30.14

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6025MHz_TX

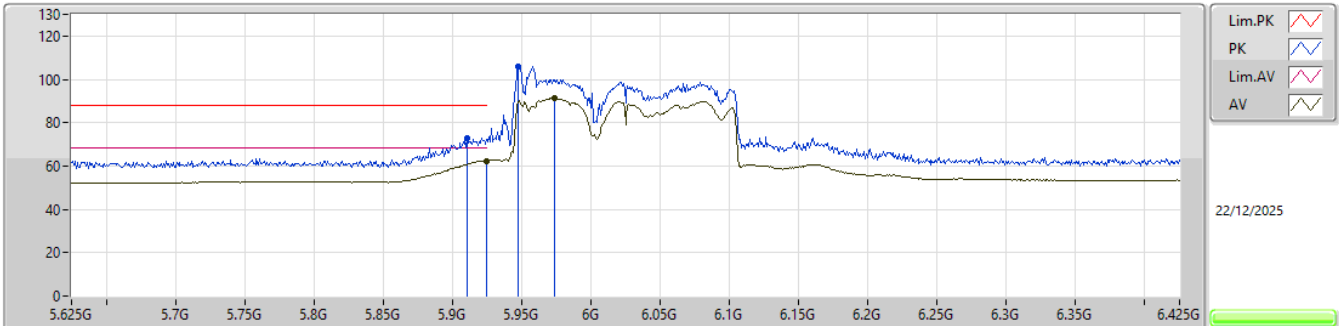EUT Y_2TX
Setting 84
02-D-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9106G	73.09	88.20	-15.11	60.97	3	Vertical	106	1.53	-	34.12	8.16	30.16			
RMS	5.925G	62.34	68.20	-5.86	50.20	3	Vertical	106	1.53	-	34.15	8.15	30.16			
PK	5.9474G	105.94	Inf	-Inf	93.76	3	Vertical	106	1.53	-	34.19	8.14	30.15			
RMS	5.9738G	91.47	Inf	-Inf	79.23	3	Vertical	106	1.53	-	34.25	8.13	30.14			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

6025MHz_TX

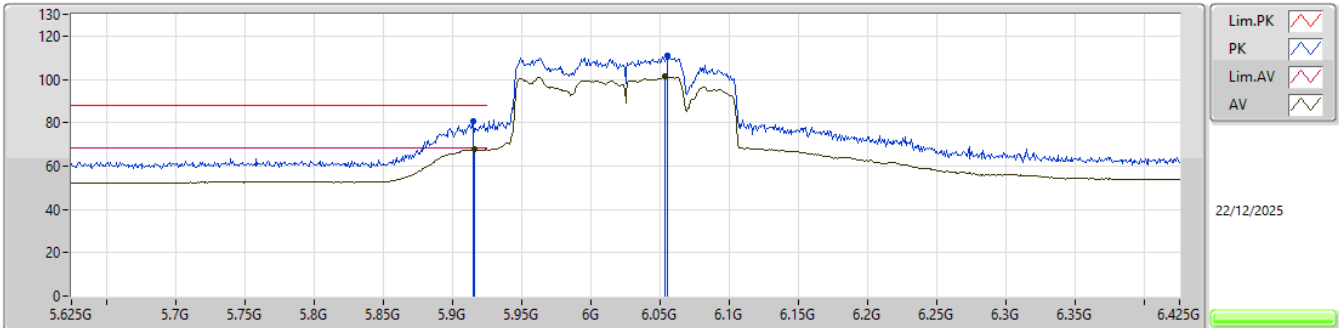


EUT_Y_2TX
Setting 84
02-D-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9146G	80.80	88.20	-7.40	68.67	3	Horizontal	128	1.76	-	34.13	8.16	30.16			
RMS	5.9162G	67.75	68.20	-0.45	55.62	3	Horizontal	128	1.76	-	34.13	8.16	30.16			
PK	6.0554G	111.01	Inf	-Inf	98.66	3	Horizontal	128	1.76	-	34.41	8.09	30.15			
RMS	6.0538G	101.22	Inf	-Inf	88.87	3	Horizontal	128	1.76	-	34.41	8.09	30.15			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6105MHz_TX

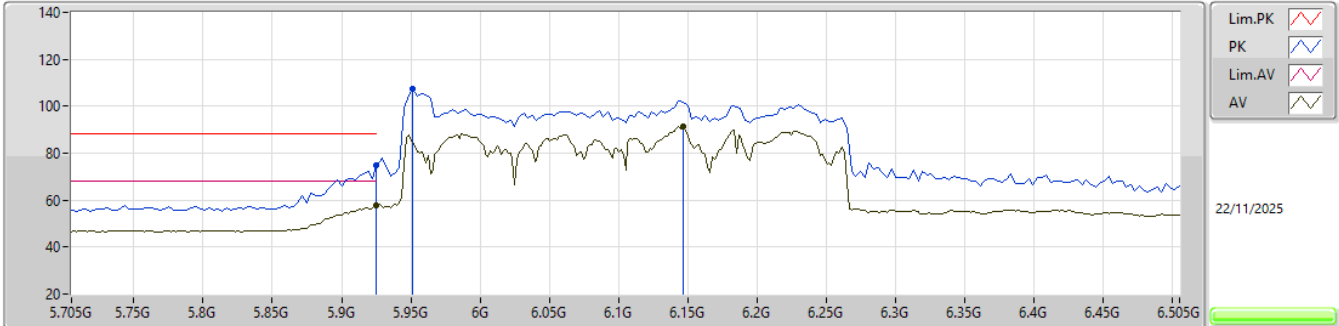


EUT_Y_2TX
Setting 88
06-U-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	75.03	88.20	-13.17	68.96	3	Vertical	335	1.35	-	32.25	7.58	33.76			
RMS	5.925G	57.60	68.20	-10.60	51.53	3	Vertical	335	1.35	-	32.25	7.58	33.76			
PK	5.9514G	107.25	Inf	-Inf	101.09	3	Vertical	335	1.35	-	32.30	7.62	33.76			
RMS	6.1466G	91.35	Inf	-Inf	84.71	3	Vertical	335	1.35	-	32.69	7.61	33.66			

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

6105MHz_TX

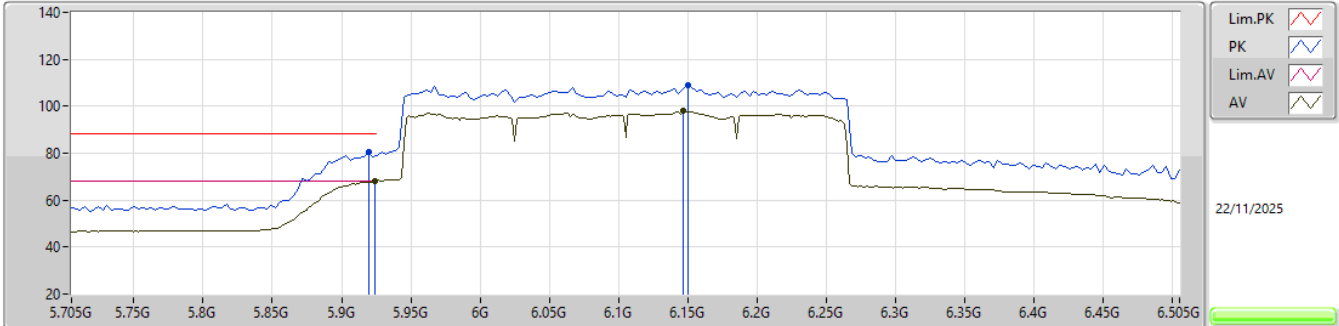


EUT_Y_2TX
Setting 88
06-U-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9194G	80.62	88.20	-7.58	74.58	3	Horizontal	273	1.88	-	32.24	7.56	33.76			
RMS	5.9242G	68.08	68.20	-0.12	62.02	3	Horizontal	273	1.88	-	32.25	7.57	33.76			
PK	6.1498G	108.93	Inf	-Inf	102.27	3	Horizontal	273	1.88	-	32.70	7.61	33.65			
RMS	6.1466G	98.05	Inf	-Inf	91.41	3	Horizontal	273	1.88	-	32.69	7.61	33.66			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

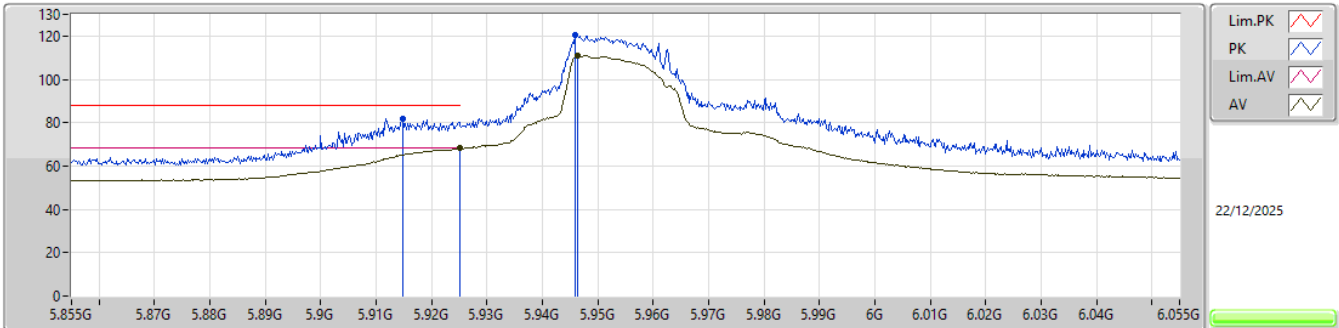


EUT_Y_4TX
Setting 81
02-D-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9148G	82.01	88.20	-6.19	69.88	3	Vertical	61	1.58	-	34.13	8.16	30.16			
RMS	5.925G	68.19	68.20	-0.01	56.05	3	Vertical	61	1.58	-	34.15	8.15	30.16			
PK	5.9458G	120.29	Inf	-Inf	108.11	3	Vertical	61	1.58	-	34.19	8.14	30.15			
RMS	5.9464G	110.91	Inf	-Inf	98.73	3	Vertical	61	1.58	-	34.19	8.14	30.15			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

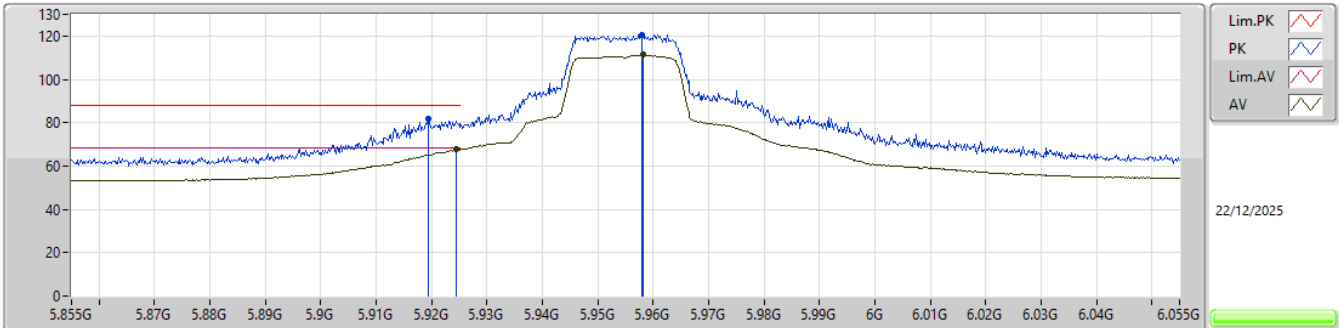


EUT_Y_4TX
Setting 81
02-D-N-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9194G	82.00	88.20	-6.20	69.86	3	Horizontal	284	1.76	-	34.14	8.16	30.16			
RMS	5.9244G	67.56	68.20	-0.64	55.42	3	Horizontal	284	1.76	-	34.15	8.15	30.16			
PK	5.958G	120.58	Inf	-Inf	108.37	3	Horizontal	284	1.76	-	34.22	8.14	30.15			
RMS	5.9582G	111.25	Inf	-Inf	99.04	3	Horizontal	284	1.76	-	34.22	8.14	30.15			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

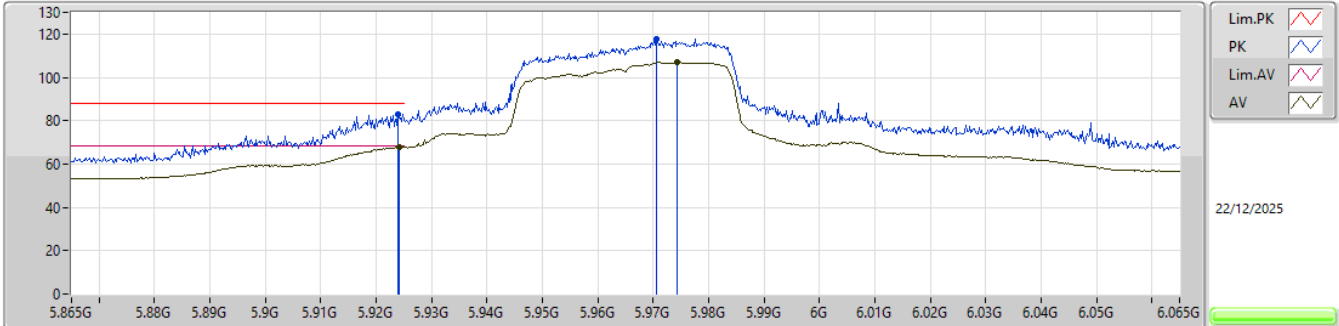


EUT_Y_4TX
Setting 82
02-D-K-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.924G	83.19	88.20	-5.01	71.05	3	Vertical	73	1.96	-	34.15	8.15	30.16			
RMS	5.9242G	67.87	68.20	-0.33	55.73	3	Vertical	73	1.96	-	34.15	8.15	30.16			
PK	5.9706G	117.58	Inf	-Inf	105.35	3	Vertical	73	1.96	-	34.24	8.13	30.14			
RMS	5.9744G	107.02	Inf	-Inf	94.78	3	Vertical	73	1.96	-	34.25	8.13	30.14			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

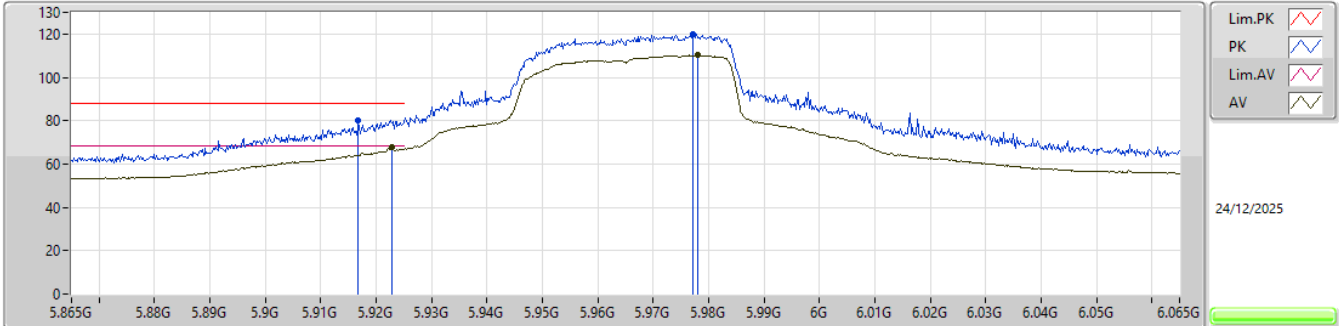


EUT_Y_4TX
Setting 82
02-D-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9168G	80.14	88.20	-8.06	68.01	3	Horizontal	303	2.06	-	34.13	8.16	30.16			
RMS	5.9228G	67.61	68.20	-0.59	55.47	3	Horizontal	303	2.06	-	34.15	8.15	30.16			
PK	5.9772G	119.94	Inf	-Inf	107.70	3	Horizontal	303	2.06	-	34.25	8.13	30.14			
RMS	5.978G	110.14	Inf	-Inf	97.89	3	Horizontal	303	2.06	-	34.26	8.13	30.14			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

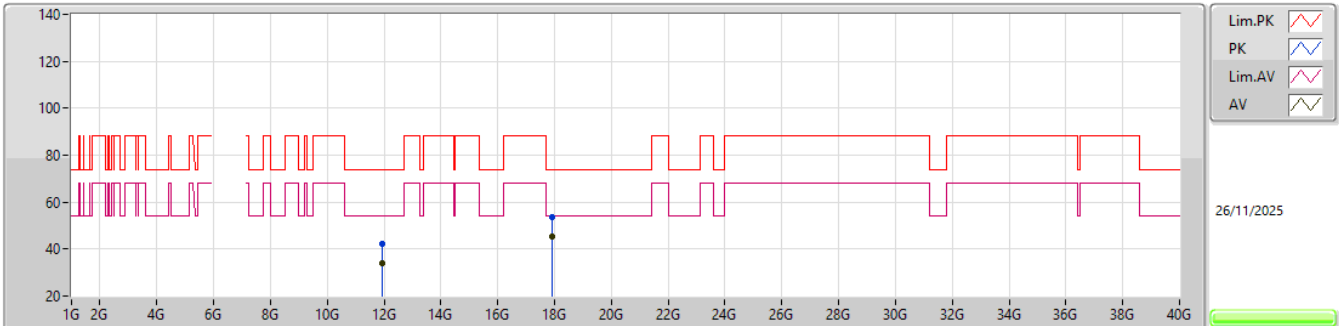


EUT_Y_4TX
Setting 82
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.93564G	42.30	74.00	-31.70	58.24	3	Vertical	141	2.71	-	38.80	11.07	65.81			
AV	11.93456G	33.99	54.00	-20.01	49.93	3	Vertical	141	2.71	-	38.80	11.07	65.81			
PK	17.90148G	53.64	74.00	-20.36	54.12	3	Vertical	235	1.47	-	48.77	14.75	64.00			
AV	17.89608G	45.13	54.00	-8.87	45.83	3	Vertical	235	1.47	-	48.55	14.75	64.00			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

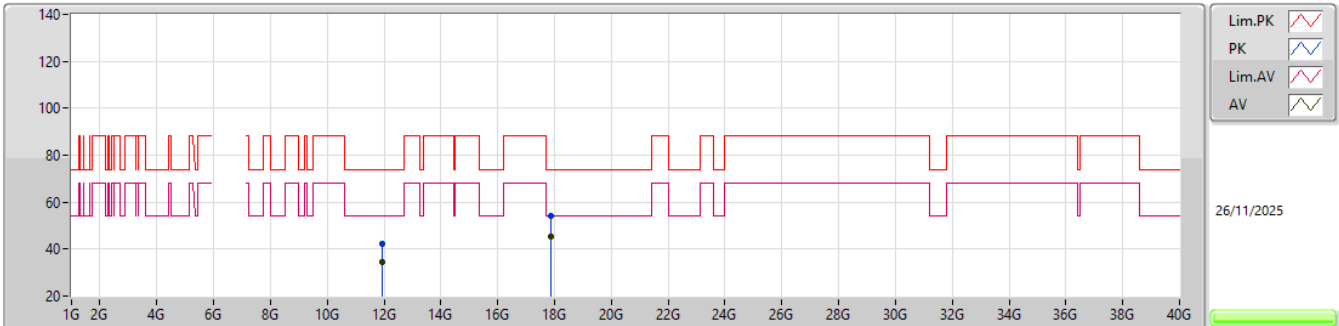


EUT_Y_4TX
Setting 82
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.93306G	42.21	74.00	-31.79	58.15	3	Horizontal	217	1.43	-	38.80	11.07	65.81			
AV	11.92376G	34.51	54.00	-19.49	50.46	3	Horizontal	217	1.43	-	38.80	11.07	65.82			
PK	17.89338G	53.90	74.00	-20.10	54.71	3	Horizontal	246	2.76	-	48.45	14.74	64.00			
AV	17.88354G	45.32	54.00	-8.68	46.52	3	Horizontal	246	2.76	-	48.07	14.74	64.01			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

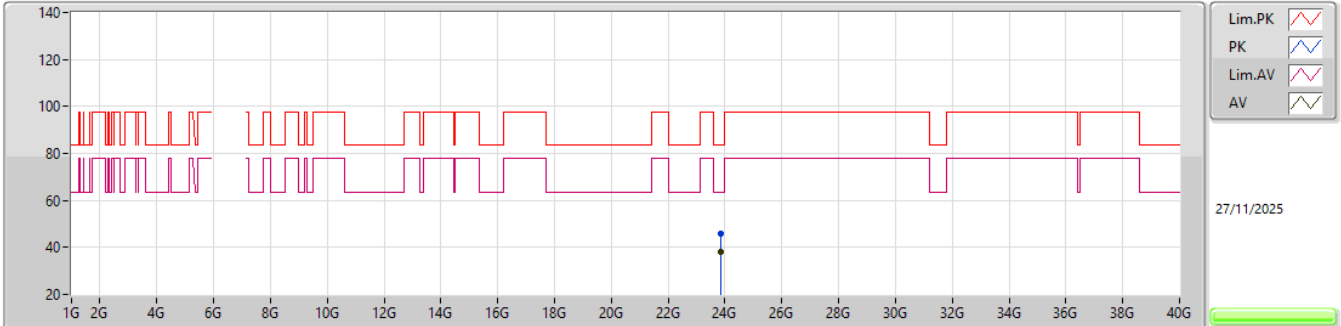


EUT Y_4TX
Setting 82
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85262G	45.65	83.54	-37.89	35.41	1	Vertical	259	1.17	-	38.61	18.76	47.13			
AV	23.8522G	38.15	63.54	-25.39	27.92	1	Vertical	259	1.17	-	38.60	18.76	47.13			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

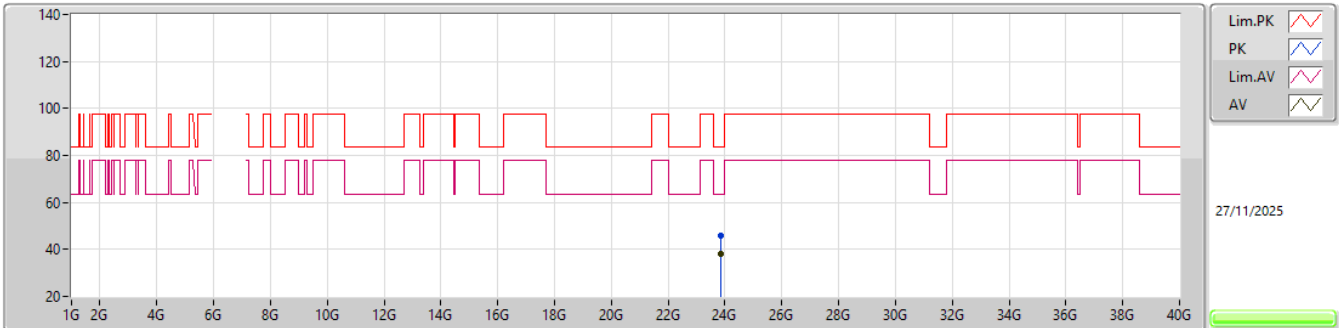


EUT Y_4TX
Setting 82
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85067G	45.90	83.54	-37.64	35.67	1	Horizontal	107	2.44	-	38.60	18.76	47.13			
AV	23.8459G	38.16	63.54	-25.38	27.91	1	Horizontal	107	2.44	-	38.62	18.76	47.13			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

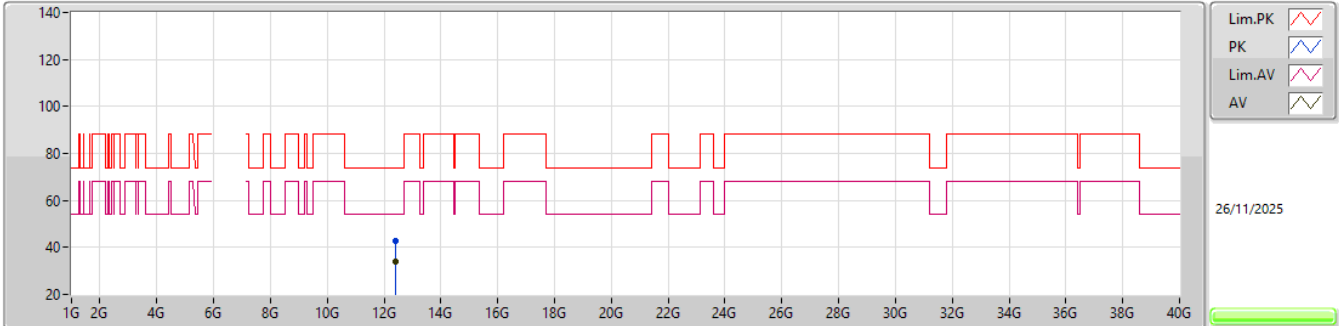


EUT_Y_4TX
Setting 92
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41282G	42.63	74.00	-31.37	58.21	3	Vertical	233	2.79	-	38.67	11.35	65.60			
AV	12.40286G	34.06	54.00	-19.94	49.63	3	Vertical	233	2.79	-	38.69	11.34	65.60			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

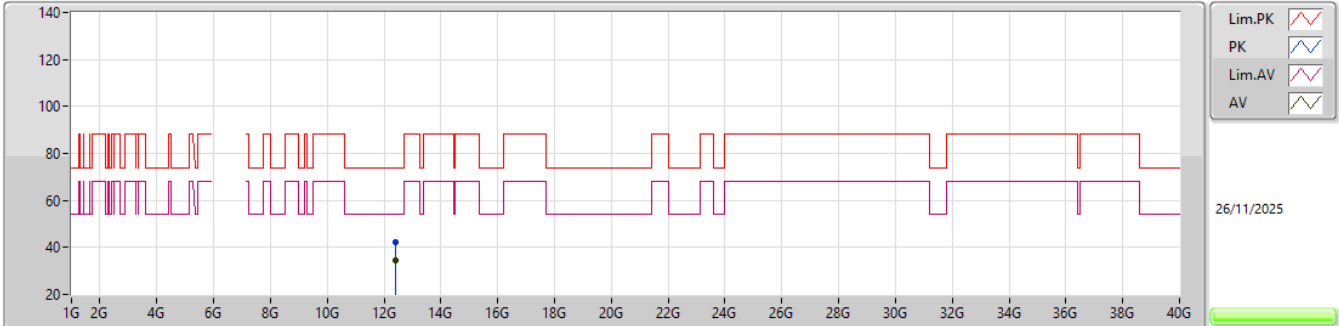


EUT_Y_4TX
Setting 92
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41312G	42.48	74.00	-31.52	58.06	3	Horizontal	209	1.51	-	38.67	11.35	65.60			
AV	12.41144G	34.48	54.00	-19.52	50.05	3	Horizontal	209	1.51	-	38.68	11.35	65.60			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

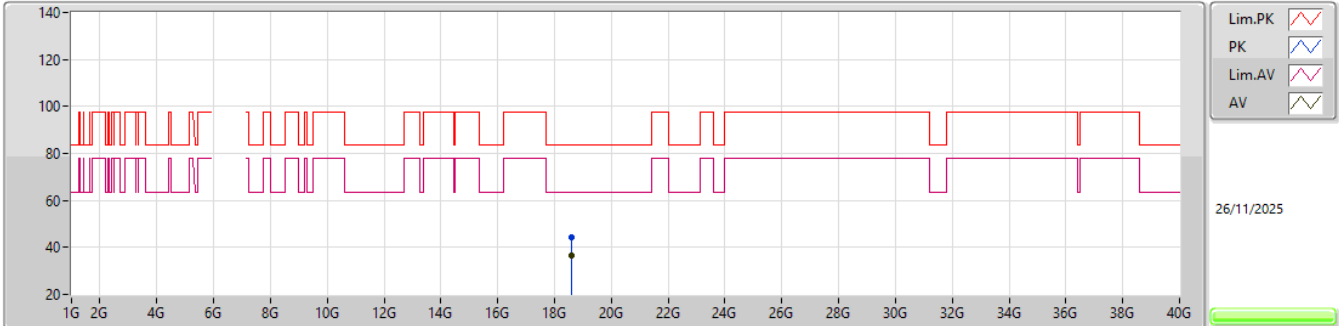

EUT_Y_4TX
Setting 92
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61576G	44.34	83.54	-39.20	39.68	1	Vertical	55	2.99	-	37.70	16.59	49.63			
AV	18.61622G	36.30	63.54	-27.24	31.63	1	Vertical	55	2.99	-	37.70	16.59	49.62			