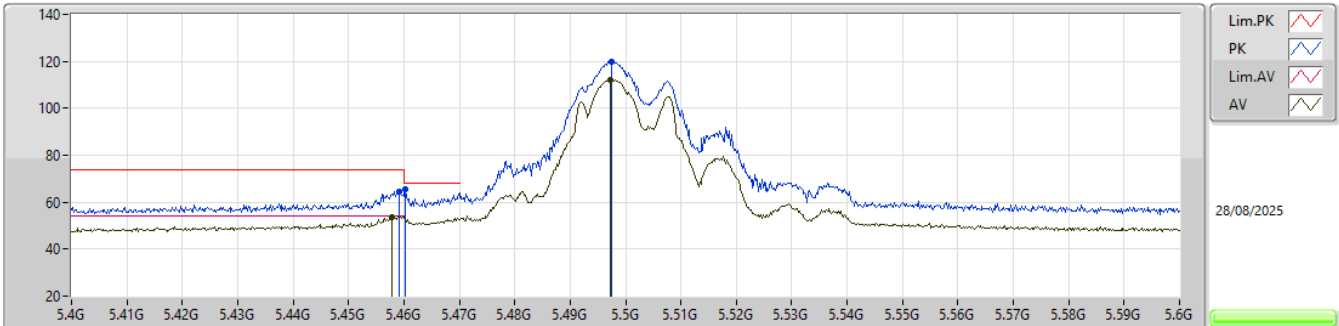


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5500MHz_TX


EUT Y_4TX
Setting 72
05-R-E-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4592G	64.63	74.00	-9.37	58.44	3	Horizontal	359	1.80	-	32.92	8.26	34.99			
AV	5.4578G	53.82	54.00	-0.18	47.64	3	Horizontal	359	1.80	-	32.92	8.26	35.00			
PK	5.4602G	65.42	68.20	-2.78	59.23	3	Horizontal	359	1.80	-	32.92	8.26	34.99			
PK	5.4974G	119.96	Inf	-Inf	113.65	3	Horizontal	359	1.80	-	32.99	8.30	34.98			
AV	5.4972G	112.21	Inf	-Inf	105.90	3	Horizontal	359	1.80	-	32.99	8.30	34.98			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5500MHz_TX

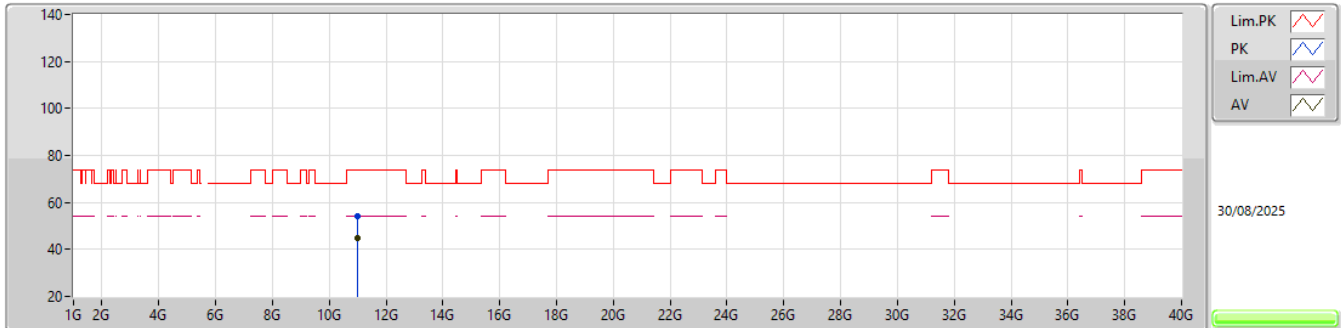EUT_Y_4TX
SET 72

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.998G	54.14	74.00	-19.86	69.83	3	Vertical	314	1.80	72	38.90	11.60	66.19			
AV	10.99708G	45.04	54.00	-8.96	60.72	3	Vertical	314	1.80	72	38.91	11.60	66.19			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5500MHz_TX

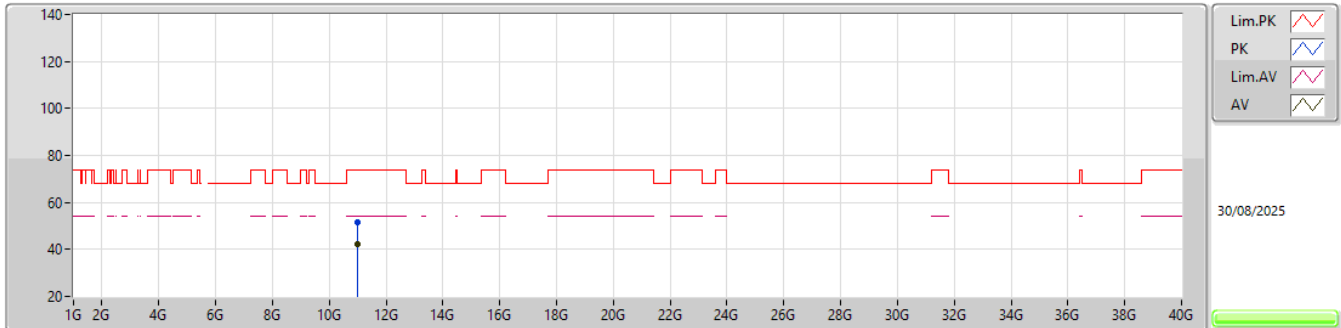EUT_Y_4TX
SET 72

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99533G	51.73	74.00	-22.27	67.42	3	Horizontal	6	1.80	72	38.91	11.60	66.20			
AV	10.99465G	42.25	54.00	-11.75	57.94	3	Horizontal	6	1.80	72	38.91	11.60	66.20			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

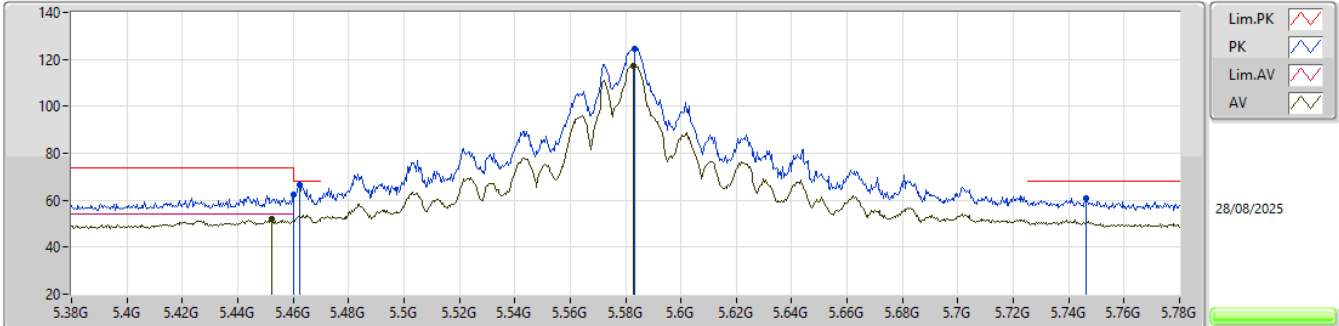


EUT_Y_4TX
Setting 95
05-R-E-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.46G	62.22	74.00	-11.78	56.03	3	Vertical	354	1.80	-	32.92	8.26	34.99			
AV	5.4524G	51.95	54.00	-2.05	45.79	3	Vertical	354	1.80	-	32.90	8.26	35.00			
PK	5.4624G	66.41	68.20	-1.79	60.21	3	Vertical	354	1.80	-	32.92	8.27	34.99			
PK	5.5832G	124.55	Inf	-Inf	118.19	3	Vertical	354	1.80	-	32.93	8.37	34.94			
AV	5.5828G	117.48	Inf	-Inf	111.12	3	Vertical	354	1.80	-	32.93	8.37	34.94			
PK	5.7464G	60.71	68.20	-7.49	53.55	3	Vertical	354	1.80	-	33.59	8.43	34.86			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

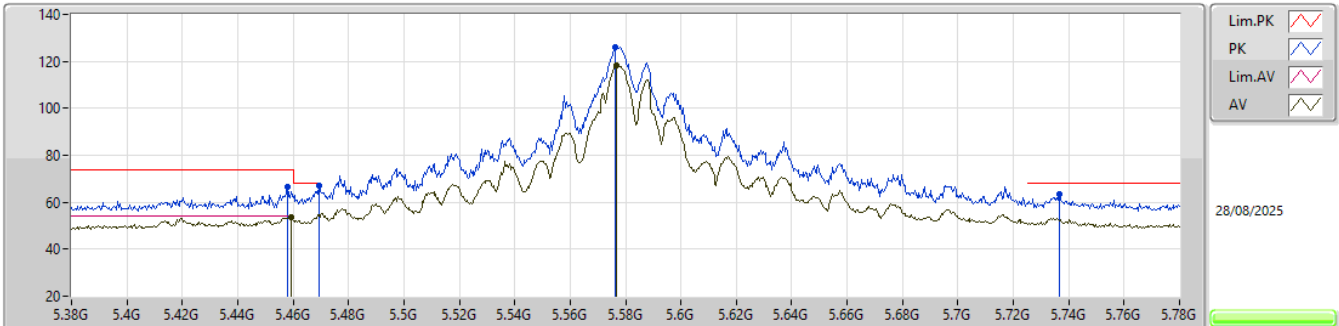


EUT_Y_4TX
Setting 95
05-R-E-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.458G	66.48	74.00	-7.52	60.30	3	Horizontal	0	1.80	-	32.92	8.26	35.00			
AV	5.4592G	53.76	54.00	-0.24	47.57	3	Horizontal	0	1.80	-	32.92	8.26	34.99			
PK	5.4692G	67.26	68.20	-0.94	61.04	3	Horizontal	0	1.80	-	32.94	8.27	34.99			
PK	5.5764G	125.79	Inf	-Inf	119.41	3	Horizontal	0	1.80	-	32.95	8.37	34.94			
AV	5.5768G	118.46	Inf	-Inf	112.08	3	Horizontal	0	1.80	-	32.95	8.37	34.94			
PK	5.7368G	63.30	68.20	-4.90	56.19	3	Horizontal	0	1.80	-	33.55	8.43	34.87			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5580MHz_TX

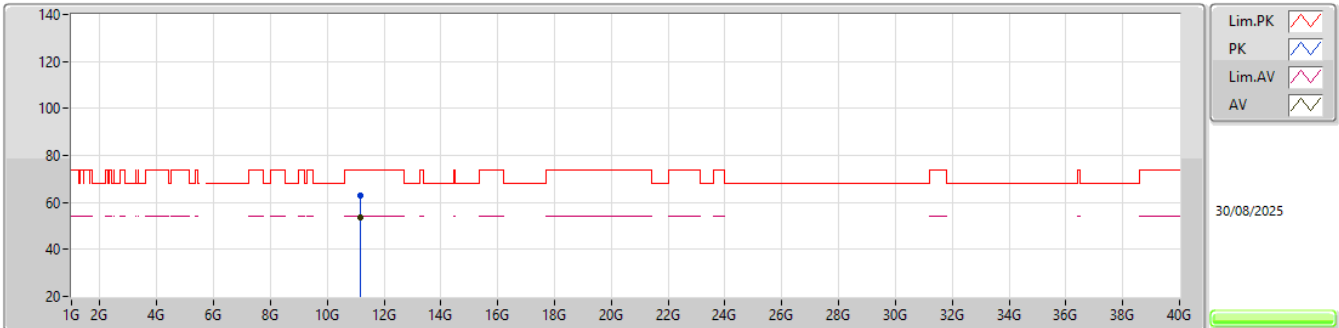EUT_Y_4TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15497G	62.80	74.00	-11.20	78.31	3	Vertical	316	1.80	95	39.00	11.68	66.19			
AV	11.15596G	53.46	54.00	-0.54	68.97	3	Vertical	316	1.80	95	39.00	11.68	66.19			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5580MHz_TX

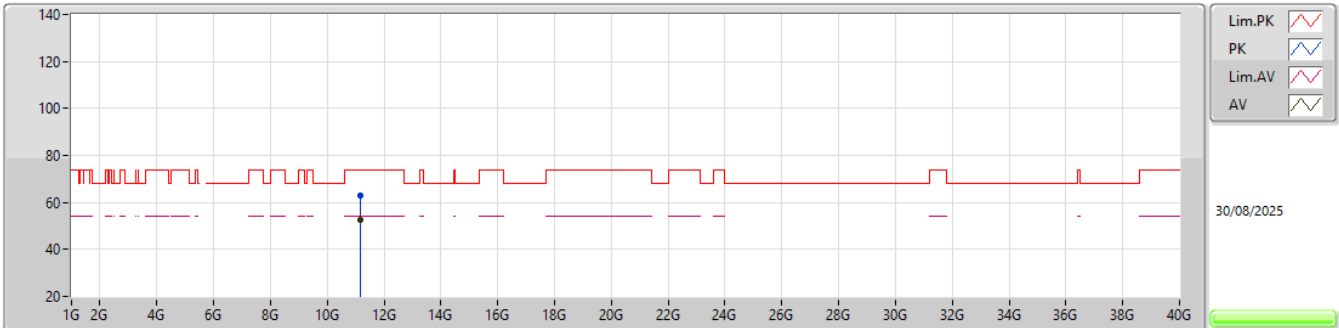EUT_Y_4TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16659G	63.07	74.00	-10.93	78.57	3	Horizontal	314	1.80	95	39.00	11.69	66.19			
AV	11.16703G	52.61	54.00	-1.39	68.11	3	Horizontal	314	1.80	95	39.00	11.69	66.19			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

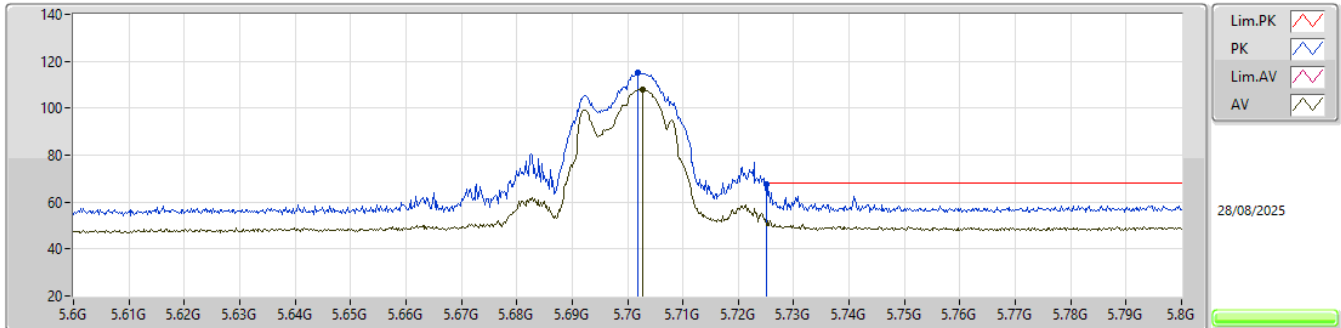


EUT_Y_4TX
Setting 57
05-R-E-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7018G	115.31	Inf	-Inf	108.36	3	Vertical	354	1.80	-	33.41	8.42	34.88			
AV	5.7028G	107.89	Inf	-Inf	100.94	3	Vertical	354	1.80	-	33.41	8.42	34.88			
PK	5.725G	67.35	68.20	-0.85	60.29	3	Vertical	354	1.80	-	33.50	8.43	34.87			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

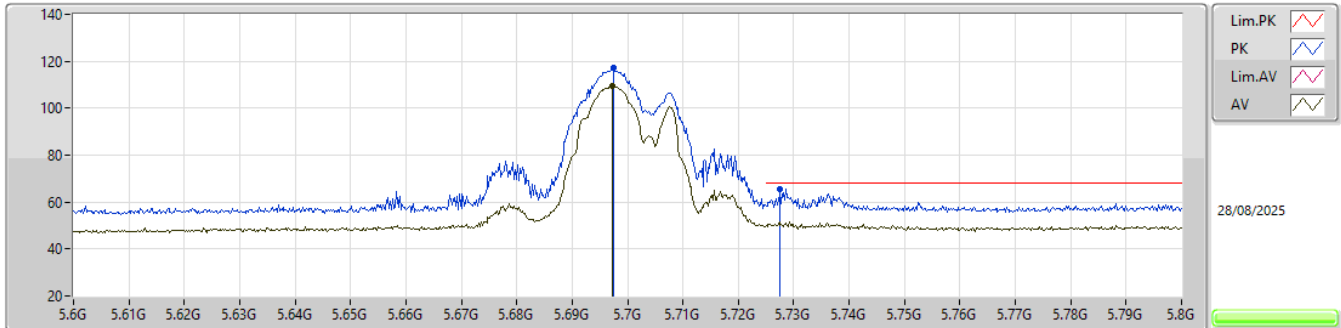


EUT_Y_4TX
Setting 57
05-R-E-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6974G	117.35	Inf	-Inf	110.44	3	Horizontal	354	1.80	-	33.38	8.42	34.89			
AV	5.6972G	109.67	Inf	-Inf	102.76	3	Horizontal	354	1.80	-	33.38	8.42	34.89			
PK	5.7276G	65.71	68.20	-2.49	58.64	3	Horizontal	354	1.80	-	33.51	8.43	34.87			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5700MHz_TX

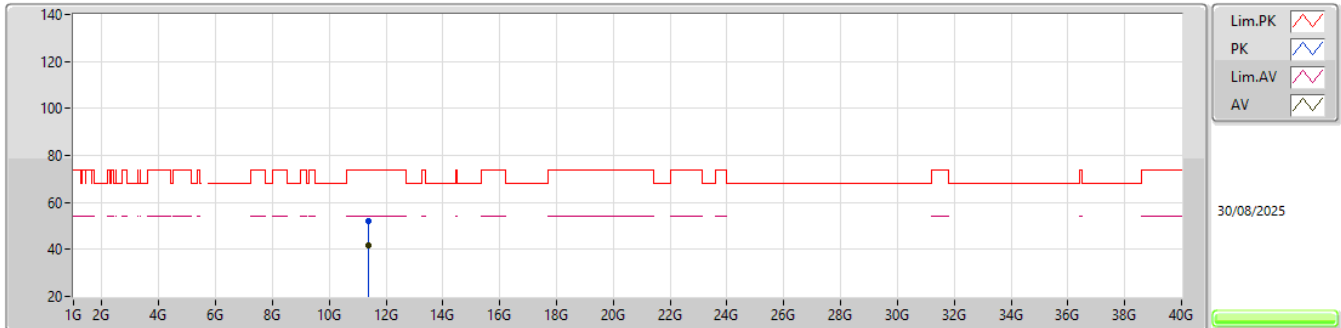EUT_Y_4TX
SET 57

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.39517G	52.32	74.00	-21.68	67.61	3	Vertical	311	1.80	57	39.10	11.81	66.20			
AV	11.39549G	41.90	54.00	-12.10	57.19	3	Vertical	311	1.80	57	39.10	11.81	66.20			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5700MHz_TX

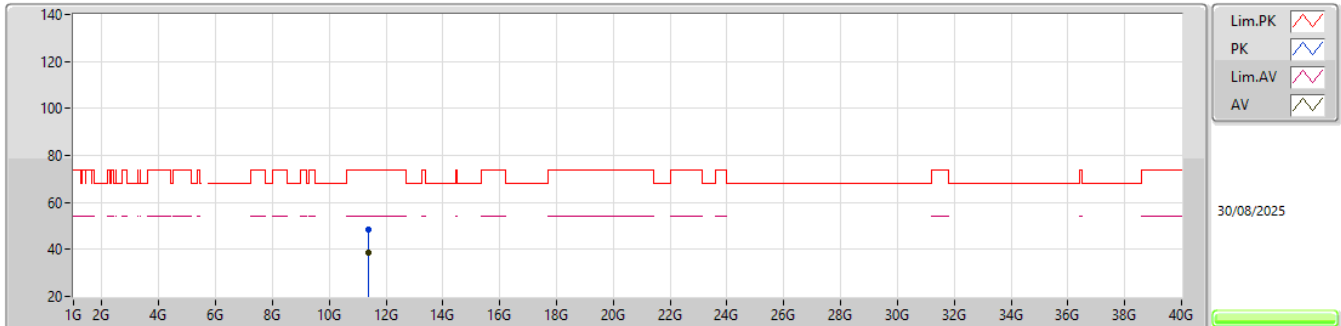EUT_Y_4TX
SET 57

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39437G	48.54	74.00	-25.46	63.83	3	Horizontal	38	1.80	57	39.10	11.81	66.20			
AV	11.3964G	38.77	54.00	-15.23	54.06	3	Horizontal	38	1.80	57	39.10	11.81	66.20			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

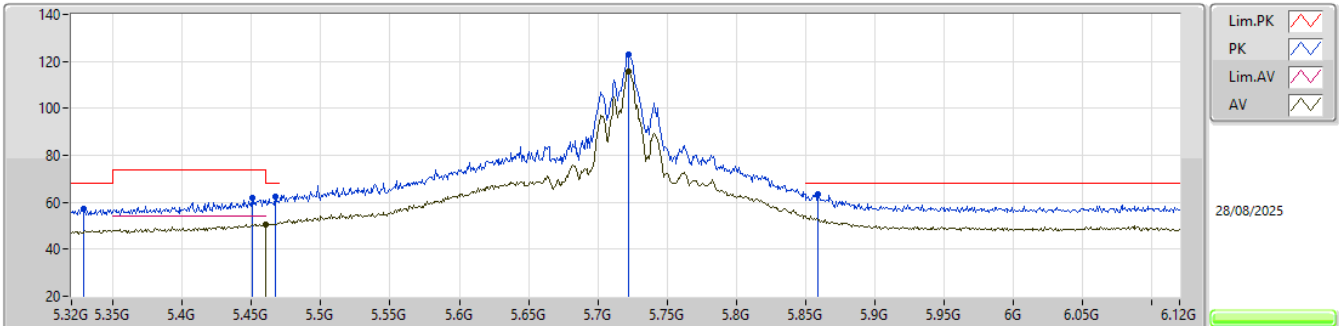


EUT_Y_4TX
Setting 92
05-R-E-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3288G	57.16	68.20	-11.04	51.13	3	Vertical	356	1.80	-	32.90	8.17	35.04				
PK	5.4504G	61.96	74.00	-12.04	55.80	3	Vertical	356	1.80	-	32.90	8.26	35.00				
PK	5.4672G	62.35	68.20	-5.85	56.14	3	Vertical	356	1.80	-	32.93	8.27	34.99				
AV	5.46G	50.69	54.00	-3.31	44.50	3	Vertical	356	1.80	-	32.92	8.26	34.99				
PK	5.7224G	123.15	Inf	-Inf	116.10	3	Vertical	356	1.80	-	33.49	8.43	34.87				
AV	5.7224G	115.56	Inf	-Inf	108.51	3	Vertical	356	1.80	-	33.49	8.43	34.87				
PK	5.8592G	63.66	68.20	-4.54	56.05	3	Vertical	356	1.80	-	33.94	8.48	34.81				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

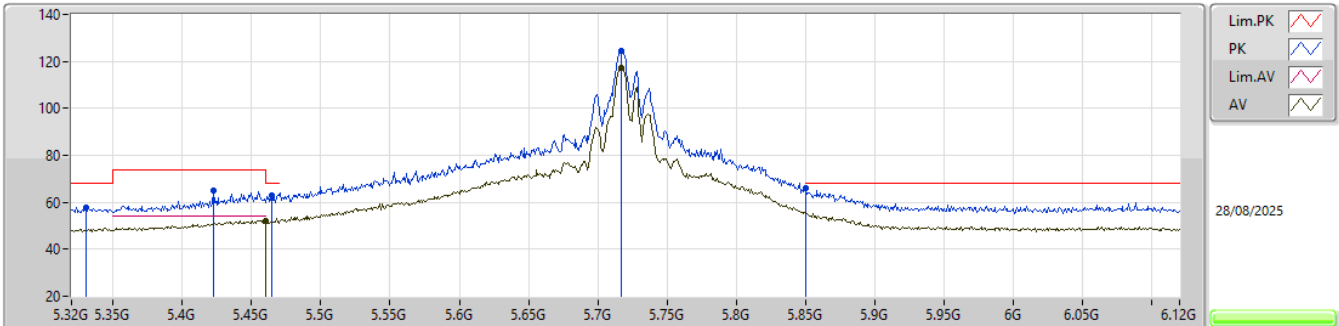


EUT_V_4TX
Setting 92
05-R-E-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3304G	57.87	68.20	-10.33	51.84	3	Horizontal	356	1.80	-	32.90	8.17	35.04			
PK	5.4224G	64.84	74.00	-9.16	58.72	3	Horizontal	356	1.80	-	32.90	8.23	35.01			
PK	5.4648G	63.02	68.20	-5.18	56.81	3	Horizontal	356	1.80	-	32.93	8.27	34.99			
AV	5.46G	52.27	54.00	-1.73	46.08	3	Horizontal	356	1.80	-	32.92	8.26	34.99			
PK	5.7168G	124.34	Inf	-Inf	117.32	3	Horizontal	356	1.80	-	33.47	8.43	34.88			
AV	5.7168G	117.39	Inf	-Inf	110.37	3	Horizontal	356	1.80	-	33.47	8.43	34.88			
PK	5.85G	66.06	68.20	-2.14	58.50	3	Horizontal	356	1.80	-	33.90	8.47	34.81			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

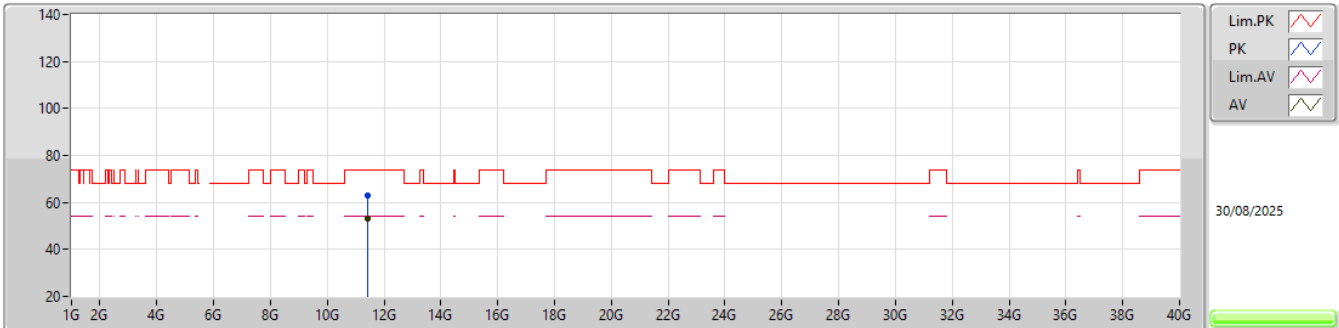


EUT_Y_4TX
SET 92

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43509G	62.77	74.00	-11.23	78.04	3	Vertical	312	1.80	92	39.10	11.83	66.20			
AV	11.43445G	53.18	54.00	-0.82	68.45	3	Vertical	312	1.80	92	39.10	11.83	66.20			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

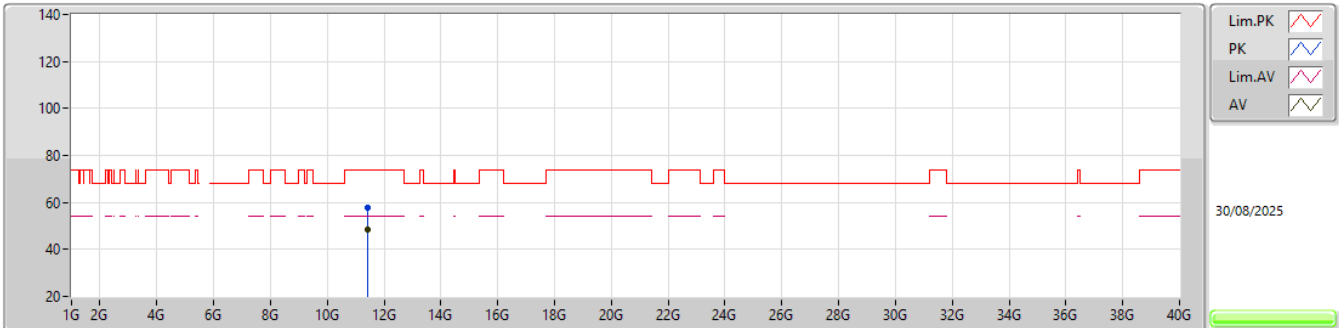


EUT_Y_4TX
SET 92

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43568G	57.52	74.00	-16.48	72.79	3	Horizontal	40	1.80	92	39.10	11.83	66.20			
AV	11.43584G	48.70	54.00	-5.30	63.97	3	Horizontal	40	1.80	92	39.10	11.83	66.20			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

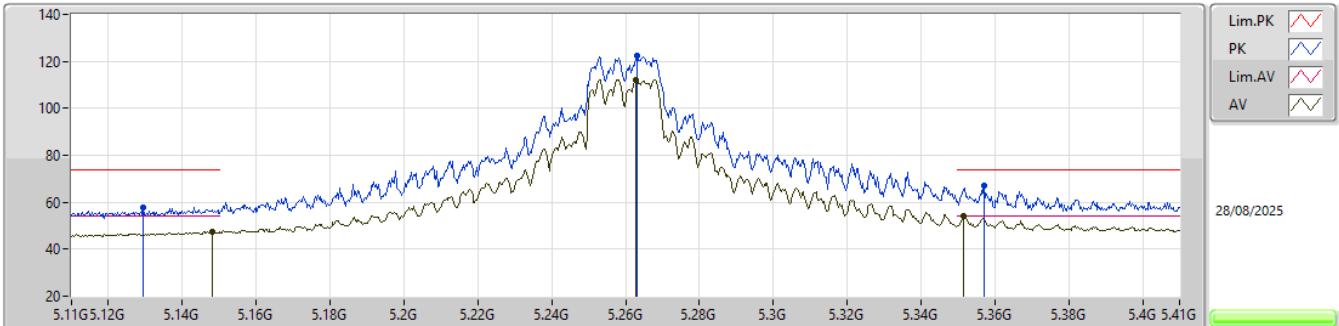


EUT_Y_4TX
Setting 89
05-R-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1295G	57.76	74.00	-16.24	51.75	3	Vertical	346	1.80	-	33.06	8.06	35.11			
AV	5.1481G	47.50	54.00	-6.50	41.44	3	Vertical	346	1.80	-	33.10	8.07	35.11			
PK	5.263G	122.39	Inf	-Inf	116.36	3	Vertical	346	1.80	-	32.97	8.13	35.07			
AV	5.2627G	112.31	Inf	-Inf	106.28	3	Vertical	346	1.80	-	32.97	8.13	35.07			
PK	5.3572G	67.19	74.00	-6.81	61.13	3	Vertical	346	1.80	-	32.90	8.19	35.03			
AV	5.3515G	53.93	54.00	-0.07	47.88	3	Vertical	346	1.80	-	32.90	8.18	35.03			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

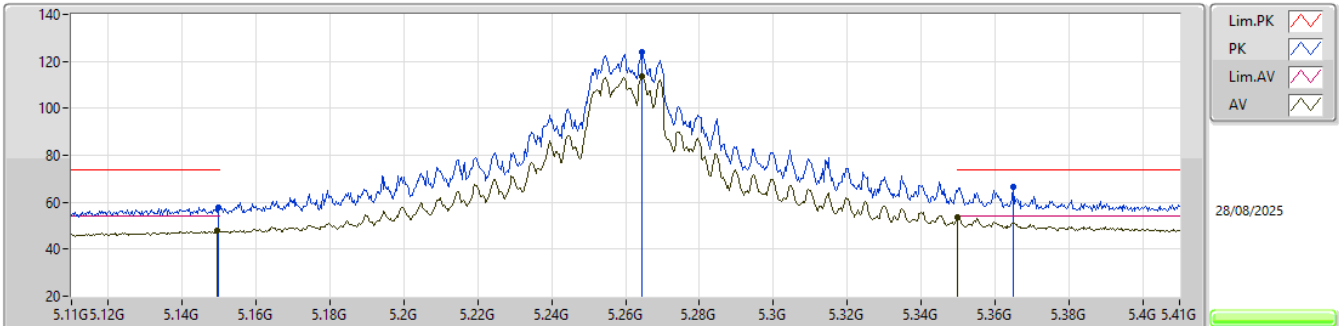


EUT_Y_4TX
Setting 89
05-R-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1499G	57.85	74.00	-16.15	51.79	3	Horizontal	354	1.80	-	33.10	8.07	35.11			
AV	5.1493G	47.79	54.00	-6.21	41.73	3	Horizontal	354	1.80	-	33.10	8.07	35.11			
PK	5.2645G	123.86	Inf	-Inf	117.81	3	Horizontal	354	1.80	-	32.97	8.14	35.06			
AV	5.2645G	113.47	Inf	-Inf	107.42	3	Horizontal	354	1.80	-	32.97	8.14	35.06			
PK	5.365G	66.32	74.00	-7.68	60.26	3	Horizontal	354	1.80	-	32.90	8.19	35.03			
AV	5.35G	53.64	54.00	-0.36	47.59	3	Horizontal	354	1.80	-	32.90	8.18	35.03			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

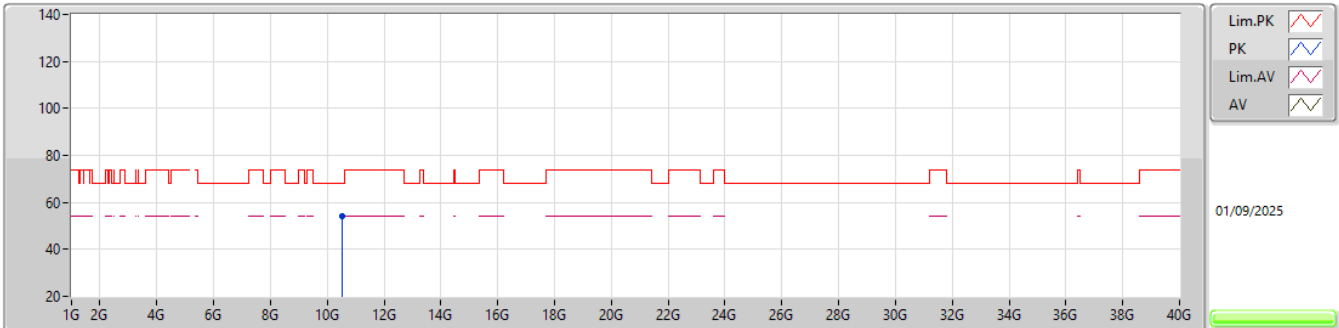


EUT_Y_4TX
Setting 89
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51928G	54.28	68.20	-13.92	70.80	3	Vertical	326	1.80	-	38.84	11.35	66.71			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

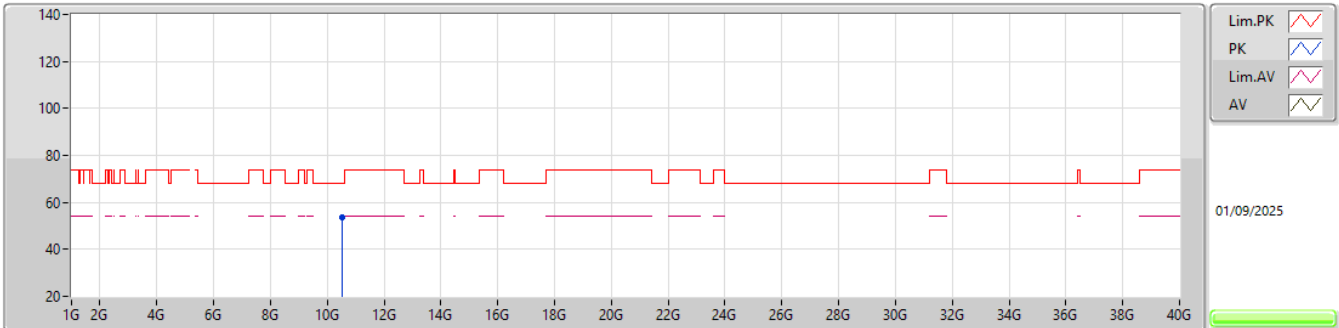


EUT_Y_4TX
Setting 89
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51847G	53.45	68.20	-14.75	69.98	3	Horizontal	1	1.80	-	38.84	11.34	66.71			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

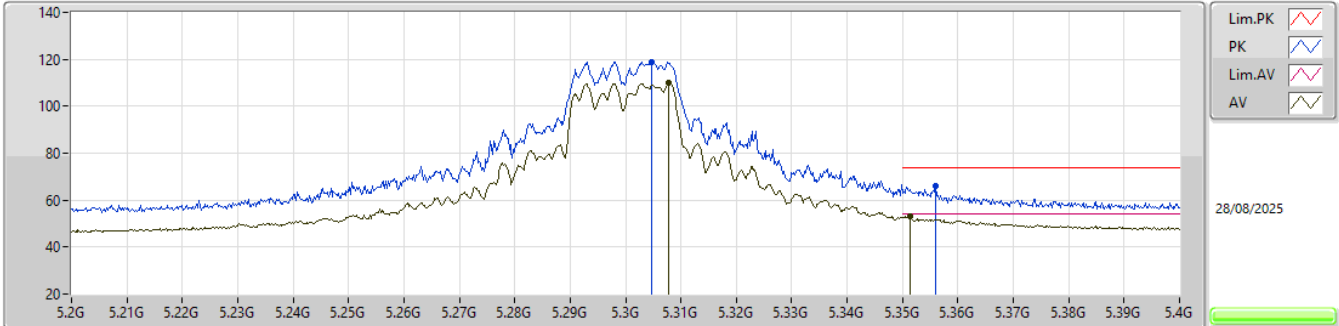


EUT Y_4TX
Setting 79
05-R-G-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3048G	119.03	Inf	-Inf	113.02	3	Vertical	344	1.80	-	32.90	8.16	35.05				
AV	5.3078G	109.79	Inf	-Inf	103.78	3	Vertical	344	1.80	-	32.90	8.16	35.05				
PK	5.356G	66.27	74.00	-7.73	60.21	3	Vertical	344	1.80	-	32.90	8.19	35.03				
AV	5.3514G	52.92	54.00	-1.08	46.87	3	Vertical	344	1.80	-	32.90	8.18	35.03				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

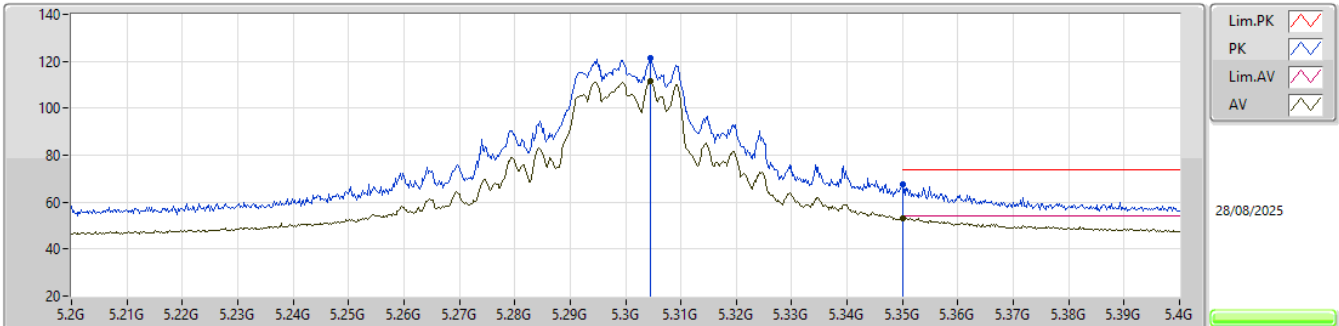


EUT Y_4TX
Setting 79
05-R-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3044G	121.35	Inf	-Inf	115.34	3	Horizontal	351	1.80	-	32.90	8.16	35.05			
AV	5.3046G	111.32	Inf	-Inf	105.31	3	Horizontal	351	1.80	-	32.90	8.16	35.05			
PK	5.35G	67.53	74.00	-6.47	61.48	3	Horizontal	351	1.80	-	32.90	8.18	35.03			
AV	5.35G	53.36	54.00	-0.64	47.31	3	Horizontal	351	1.80	-	32.90	8.18	35.03			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5300MHz_TX

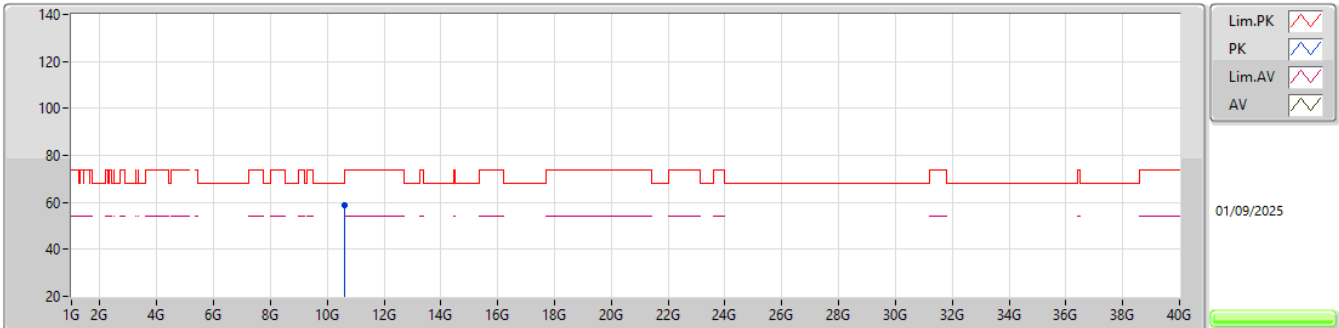EUT Y_4TX
Setting 79
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59943G	58.93	68.20	-9.27	74.96	3	Vertical	42	1.80	-	39.20	11.39	66.62			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

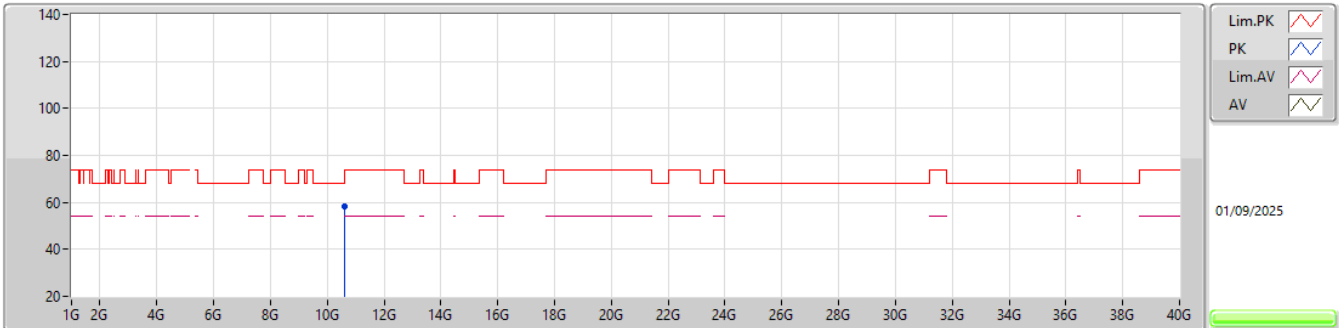


EUT_Y_4TX
Setting 79
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59895G	58.04	68.20	-10.16	74.08	3	Horizontal	42	1.80	-	39.19	11.39	66.62			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

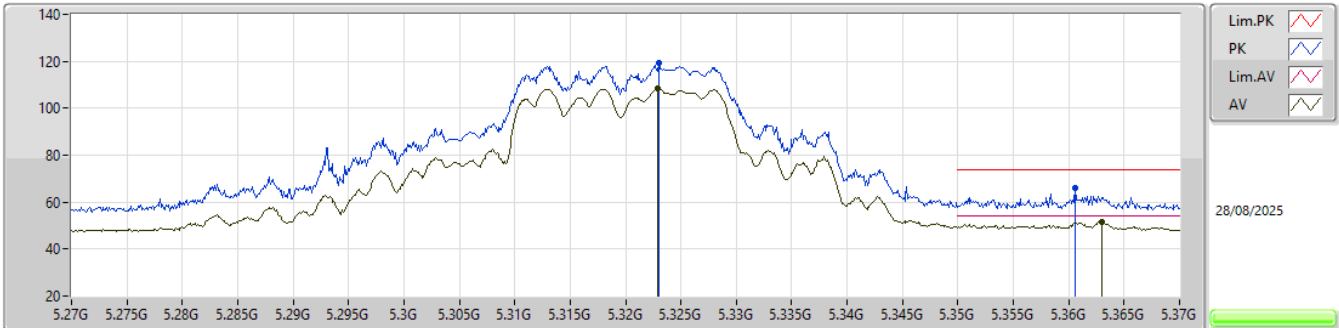


EUT Y_4TX
Setting 72
05-R-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.323G	119.09	Inf	-Inf	113.06	3	Vertical	344	1.80	-	32.90	8.17	35.04			
AV	5.3229G	108.32	Inf	-Inf	102.29	3	Vertical	344	1.80	-	32.90	8.17	35.04			
PK	5.3606G	65.80	74.00	-8.20	59.74	3	Vertical	344	1.80	-	32.90	8.19	35.03			
AV	5.363G	51.50	54.00	-2.50	45.44	3	Vertical	344	1.80	-	32.90	8.19	35.03			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

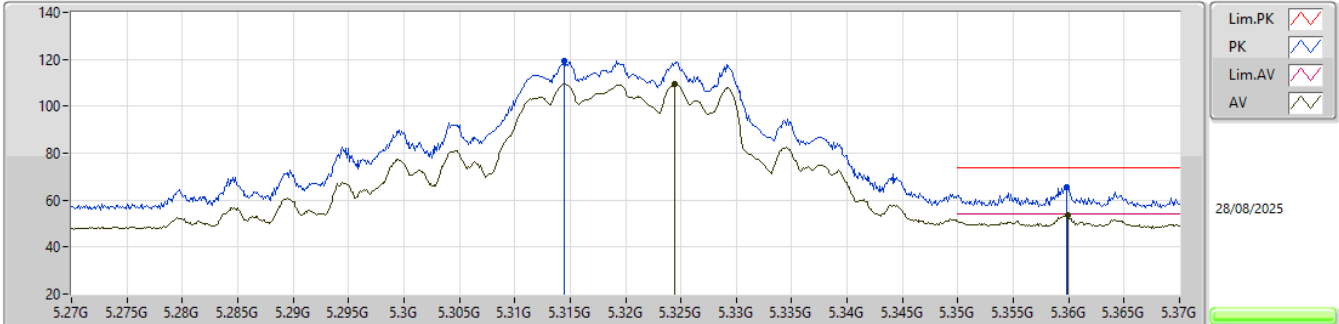


EUT_Y_4TX
Setting 72
05-R-G-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3145G	119.41	Inf	-Inf	113.40	3	Horizontal	355	1.80	-	32.90	8.16	35.05			
AV	5.3244G	109.63	Inf	-Inf	103.60	3	Horizontal	355	1.80	-	32.90	8.17	35.04			
PK	5.3598G	65.75	74.00	-8.25	59.69	3	Horizontal	355	1.80	-	32.90	8.19	35.03			
AV	5.3599G	53.57	54.00	-0.43	47.51	3	Horizontal	355	1.80	-	32.90	8.19	35.03			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

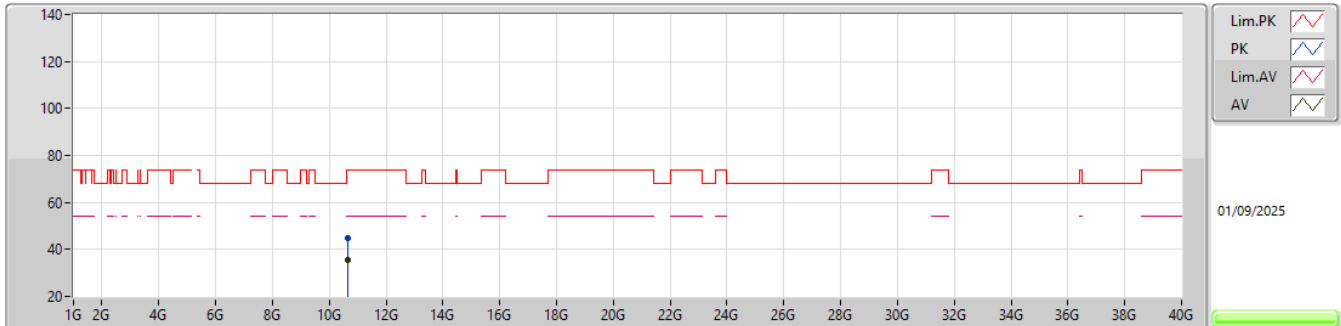


EUT Y_4TX
Setting 72
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.64087G	44.99	74.00	-29.01	60.80	3	Vertical	26	1.46	-	39.36	11.41	66.58			
AV	10.64087G	35.40	54.00	-18.60	51.21	3	Vertical	26	1.46	-	39.36	11.41	66.58			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

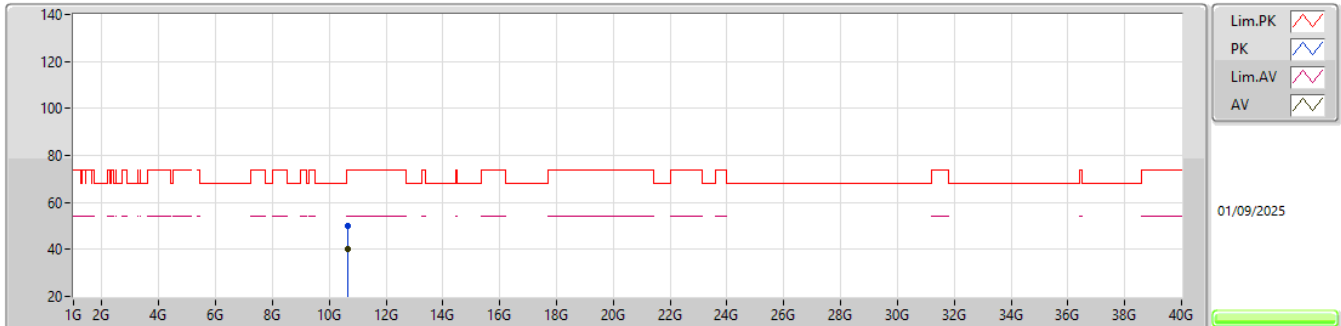


EUT Y_4TX
Setting 72
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.6385G	50.15	74.00	-23.85	65.97	3	Horizontal	302	1.80	-	39.35	11.41	66.58			
AV	10.63853G	40.36	54.00	-13.64	56.18	3	Horizontal	302	1.80	-	39.35	11.41	66.58			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

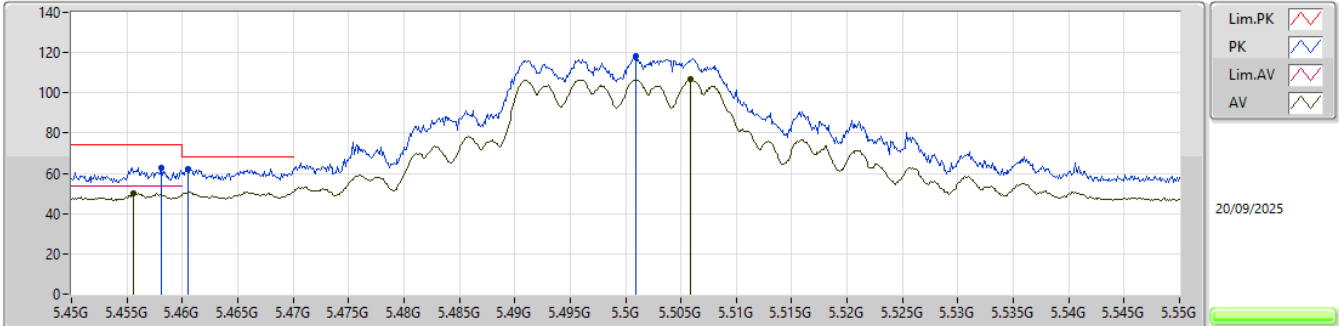


EUT_Y_4TX
Setting 74
06-H-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4581G	62.83	74.00	-11.17	58.21	3	Vertical	348	1.86	-	31.53	6.89	33.80			
AV	5.4556G	49.89	54.00	-4.11	45.28	3	Vertical	348	1.86	-	31.52	6.89	33.80			
PK	5.4605G	62.41	68.20	-5.79	57.78	3	Vertical	348	1.86	-	31.54	6.89	33.80			
PK	5.5009G	117.98	Inf	-Inf	113.19	3	Vertical	348	1.86	-	31.70	6.90	33.81			
AV	5.5059G	106.86	Inf	-Inf	102.07	3	Vertical	348	1.86	-	31.70	6.90	33.81			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

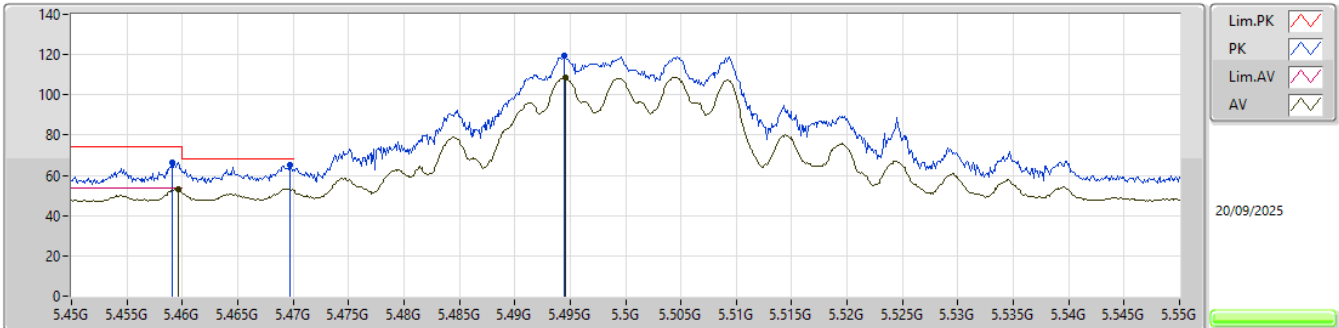


EUT_Y_4TX
Setting 74
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4591G	66.67	74.00	-7.33	62.04	3	Horizontal	351	1.74	-	31.54	6.89	33.80			
AV	5.4596G	53.25	54.00	-0.75	48.62	3	Horizontal	351	1.74	-	31.54	6.89	33.80			
PK	5.4697G	65.14	68.20	-3.06	60.47	3	Horizontal	351	1.74	-	31.58	6.89	33.80			
PK	5.4945G	119.54	Inf	-Inf	114.78	3	Horizontal	351	1.74	-	31.68	6.89	33.81			
AV	5.4946G	108.91	Inf	-Inf	104.15	3	Horizontal	351	1.74	-	31.68	6.89	33.81			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5500MHz_TX

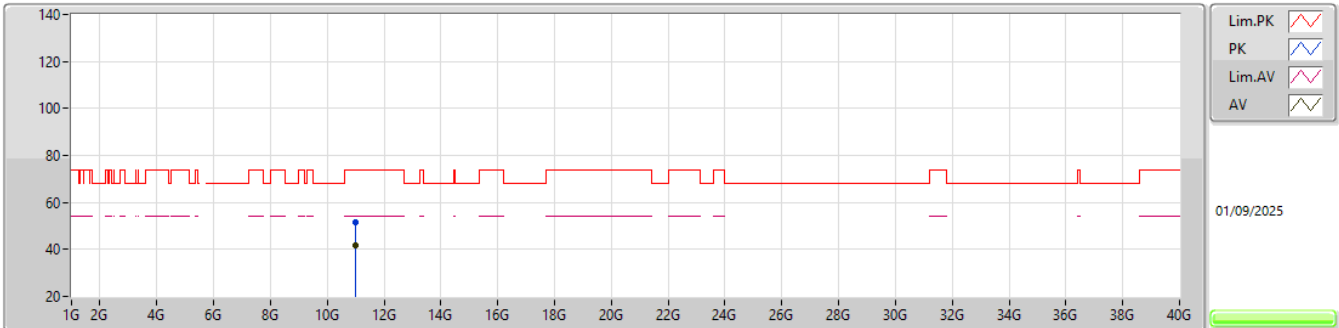EUT_Y_4TX
Setting 74
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.00243G	51.68	74.00	-22.32	67.37	3	Vertical	18	1.80	-	38.90	11.60	66.19			
AV	10.99736G	41.58	54.00	-12.42	57.26	3	Vertical	18	1.80	-	38.91	11.60	66.19			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

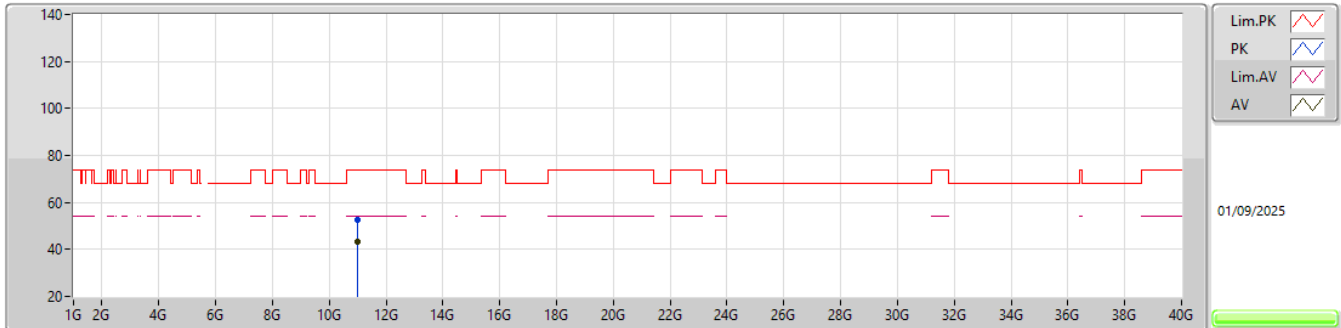


EUT_V_4TX
Setting 74
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99631G	52.73	74.00	-21.27	68.41	3	Horizontal	40	2.51	-	38.91	11.60	66.19			
AV	10.9985G	43.05	54.00	-10.95	58.74	3	Horizontal	40	2.51	-	38.90	11.60	66.19			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

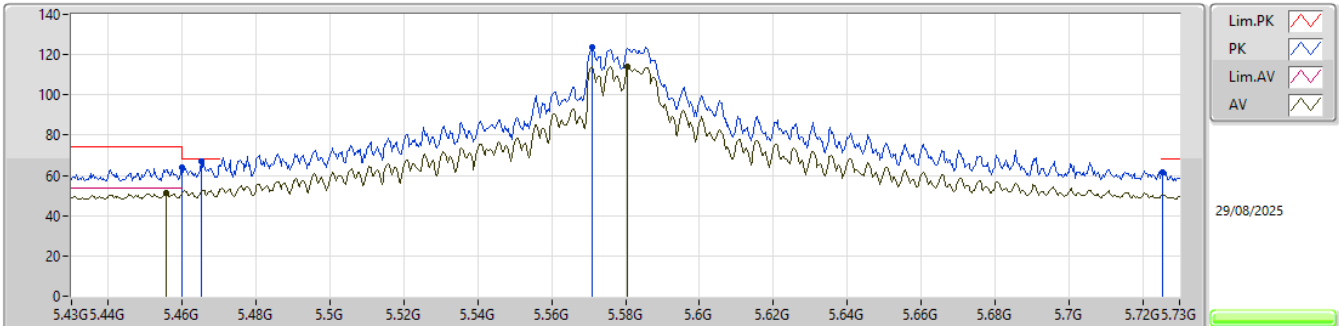


EUT_Y_4TX
SET 92
80\104\76\90\97\94\93\92
6.06\ -21.31\6.39\4.26\ -4.62\ -1.74\ -0.11\1.22

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.46G	63.69	74.00	-10.31	57.50	3	Vertical	346	1.80	92	32.92	8.26	34.99
AV	5.4555G	51.58	54.00	-2.42	45.41	3	Vertical	346	1.80	92	32.91	8.26	35.00
PK	5.4651G	66.98	68.20	-1.22	60.77	3	Vertical	346	1.80	92	32.93	8.27	34.99
PK	5.571G	123.47	Inf	-Inf	117.10	3	Vertical	346	1.80	92	32.96	8.36	34.95
AV	5.5806G	114.02	Inf	-Inf	107.65	3	Vertical	346	1.80	92	32.94	8.37	34.94
PK	5.7255G	61.51	68.20	-6.69	54.45	3	Vertical	346	1.80	92	33.50	8.43	34.87

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5580MHz_TX

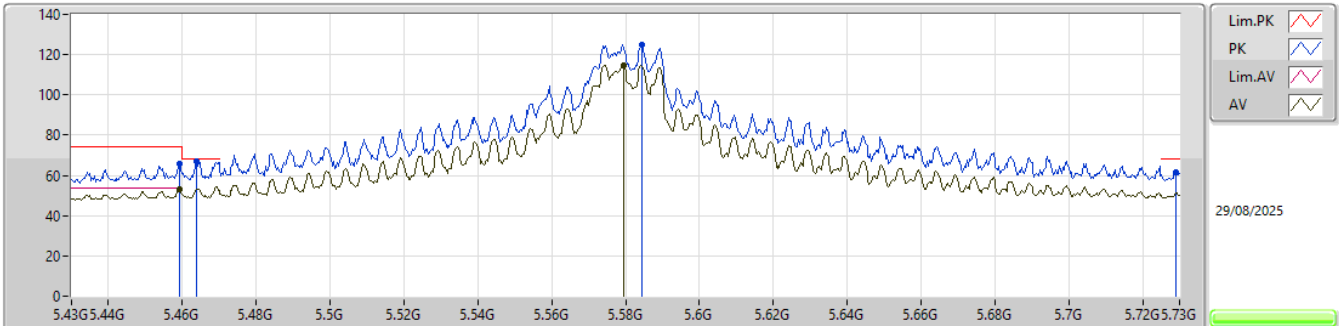EUT_Y_4TX
SET 92
92
1.12

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4594G	66.05	74.00	-7.95	59.86	3	Horizontal	347	1.80	92	32.92	8.26	34.99			
AV	5.4591G	52.88	54.00	-1.12	46.69	3	Horizontal	347	1.80	92	32.92	8.26	34.99			
PK	5.4639G	66.94	68.20	-1.26	60.73	3	Horizontal	347	1.80	92	32.93	8.27	34.99			
PK	5.5845G	124.65	Inf	-Inf	118.28	3	Horizontal	347	1.80	92	32.93	8.38	34.94			
AV	5.5794G	114.75	Inf	-Inf	108.38	3	Horizontal	347	1.80	92	32.94	8.37	34.94			
PK	5.7291G	61.75	68.20	-6.45	54.67	3	Horizontal	347	1.80	92	33.52	8.43	34.87			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

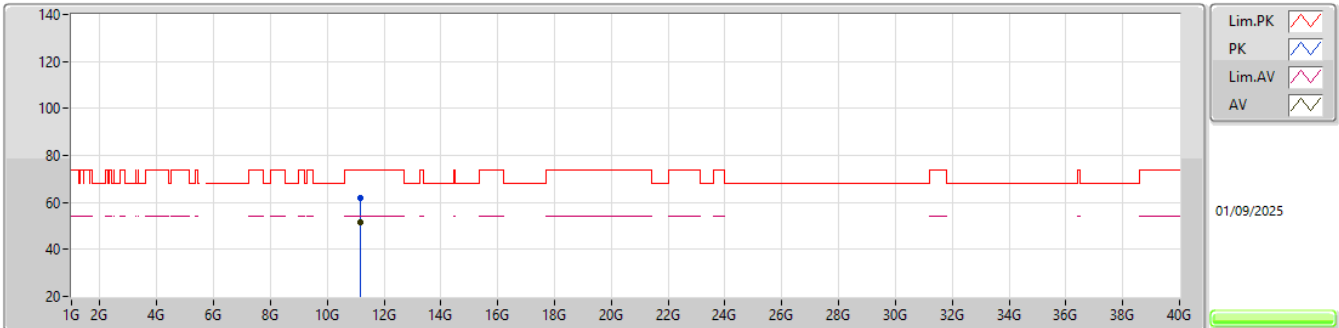


EUT_V_4TX
Setting 92
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.16144G	61.75	74.00	-12.25	77.25	3	Vertical	307	1.80	-	39.00	11.69	66.19			
AV	11.16207G	51.48	54.00	-2.52	66.98	3	Vertical	307	1.80	-	39.00	11.69	66.19			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

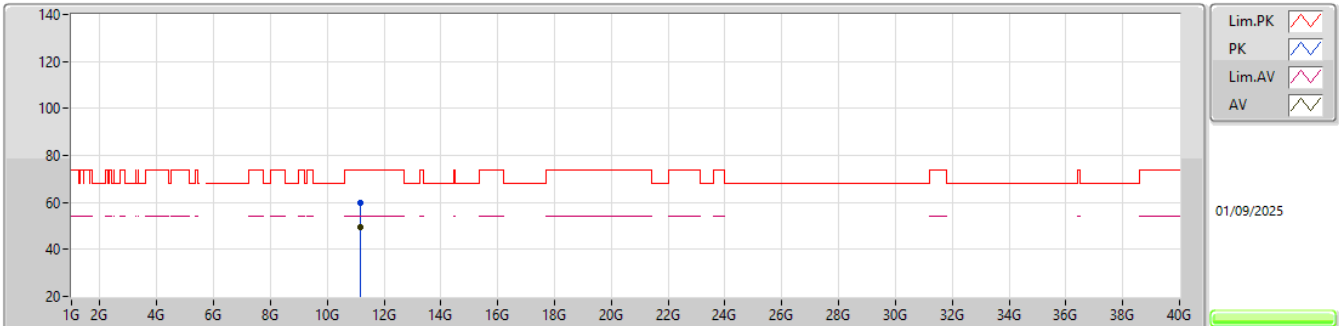


EUT_Y_4TX
Setting 92
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15835G	59.73	74.00	-14.27	75.24	3	Horizontal	311	1.80	-	39.00	11.68	66.19			
AV	11.15829G	49.31	54.00	-4.69	64.82	3	Horizontal	311	1.80	-	39.00	11.68	66.19			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5700MHz_TX

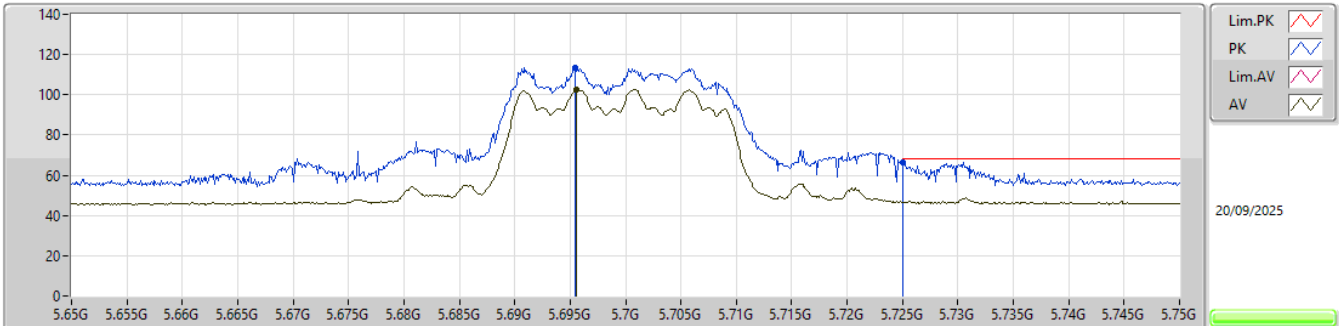EUT_Y_4TX
SET 52
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6955G	113.53	Inf	-Inf	108.31	3	Vertical	352	2.02	-	31.97	7.04	33.79			
AV	5.6956G	102.62	Inf	-Inf	97.40	3	Vertical	352	2.02	-	31.97	7.04	33.79			
PK	5.725G	66.62	68.20	-1.58	61.32	3	Vertical	352	2.02	-	32.00	7.08	33.78			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

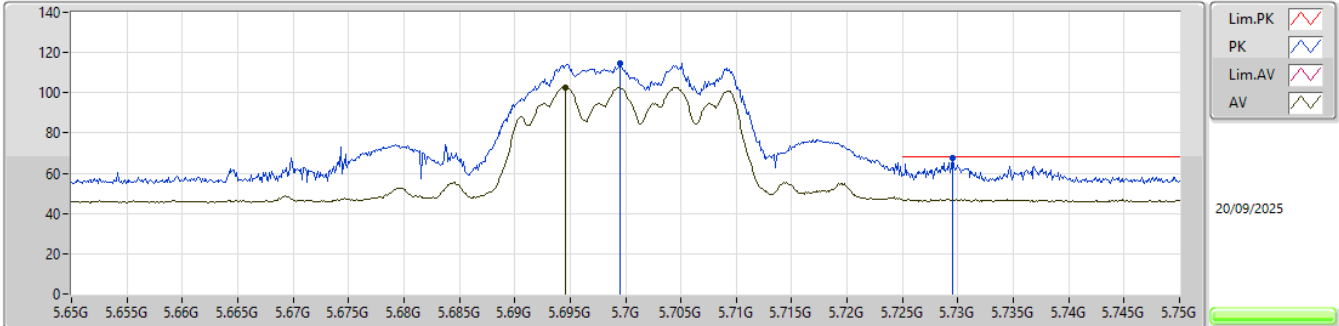


EUT_Y_4TX
SET 52
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.6995G	114.85	Inf	-Inf	109.60	3	Horizontal	342	1.77	-	32.00	7.04	33.79
AV	5.6946G	102.71	Inf	-Inf	97.49	3	Horizontal	342	1.77	-	31.97	7.04	33.79
PK	5.7295G	67.80	68.20	-0.40	62.50	3	Horizontal	342	1.77	-	32.00	7.08	33.78

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

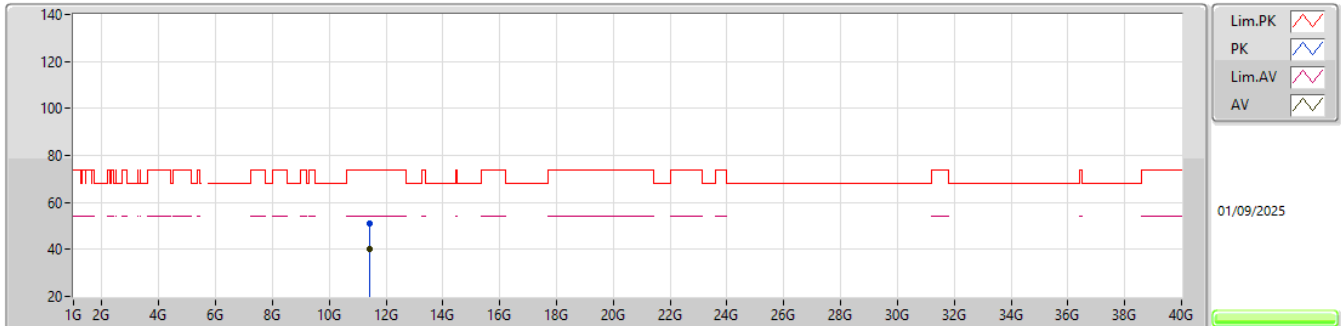


EUT_V_4TX
Setting 52
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.40144G	51.13	74.00	-22.87	66.42	3	Vertical	303	1.80	-	39.10	11.81	66.20			
AV	11.4015G	40.28	54.00	-13.72	55.57	3	Vertical	303	1.80	-	39.10	11.81	66.20			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

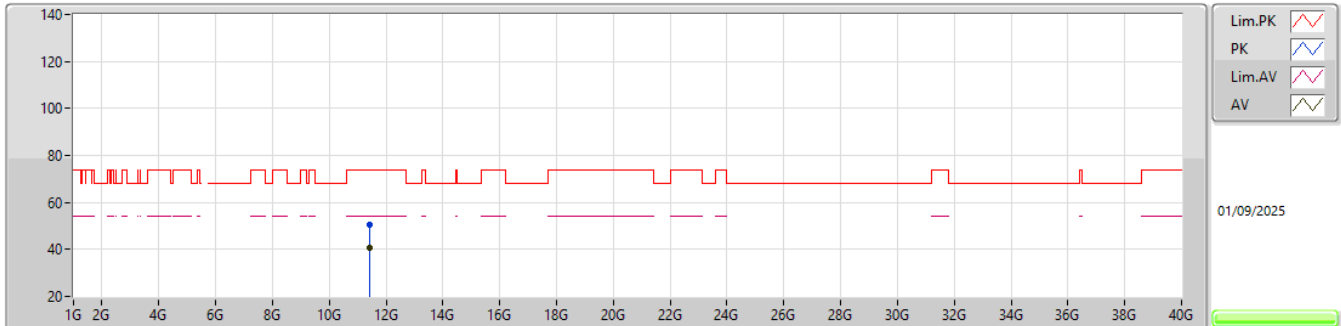


EUT_V_4TX
Setting 52
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40389G	50.59	74.00	-23.41	65.88	3	Horizontal	269	2.01	-	39.10	11.81	66.20			
AV	11.40384G	40.85	54.00	-13.15	56.14	3	Horizontal	269	2.01	-	39.10	11.81	66.20			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

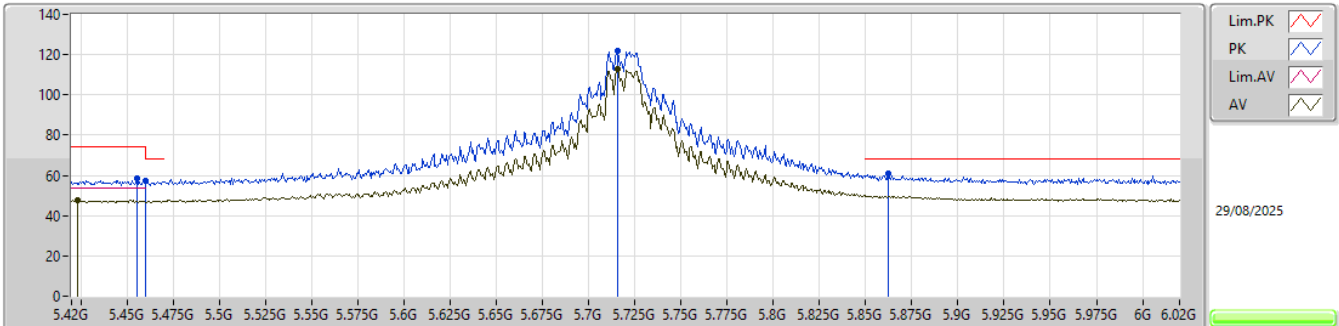


EUT_Y_4TX
SET 91
80\107\76\91\98\95\94\82\88\91
6.82\10.30\6.84\6.44\10.59\10.35\10.02\6.60\6.29\6.41

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4554G	58.27	74.00	-15.73	52.10	3	Vertical	344	1.80	91	32.91	8.26	35.00			
AV	5.4236G	47.59	54.00	-6.41	41.47	3	Vertical	344	1.80	91	32.90	8.23	35.01			
PK	5.4602G	57.25	68.20	-10.95	51.06	3	Vertical	344	1.80	91	32.92	8.26	34.99			
PK	5.7158G	121.84	Inf	-Inf	114.84	3	Vertical	344	1.80	91	33.46	8.42	34.88			
AV	5.7158G	112.59	Inf	-Inf	105.59	3	Vertical	344	1.80	91	33.46	8.42	34.88			
PK	5.8622G	61.18	68.20	-7.02	53.56	3	Vertical	344	1.80	91	33.95	8.48	34.81			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

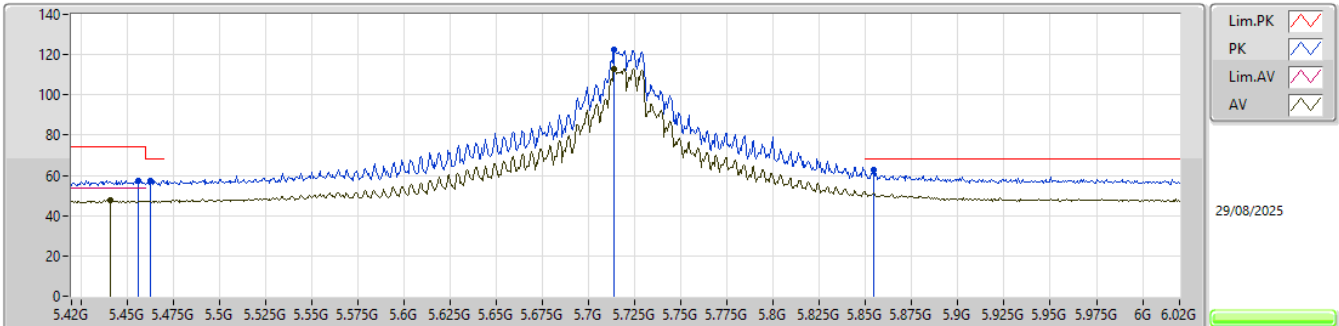


EUT_Y_4TX
SET 91
91
5.28

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.456G	57.62	74.00	-16.38	51.45	3	Horizontal	351	1.80	91	32.91	8.26	35.00			
AV	5.441G	47.45	54.00	-6.55	41.30	3	Horizontal	351	1.80	91	32.90	8.25	35.00			
PK	5.4626G	57.38	68.20	-10.82	51.17	3	Horizontal	351	1.80	91	32.93	8.27	34.99			
PK	5.714G	122.56	Inf	-Inf	115.56	3	Horizontal	351	1.80	91	33.46	8.42	34.88			
AV	5.714G	113.06	Inf	-Inf	106.06	3	Horizontal	351	1.80	91	33.46	8.42	34.88			
PK	5.8544G	62.92	68.20	-5.28	55.34	3	Horizontal	351	1.80	91	33.92	8.47	34.81			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

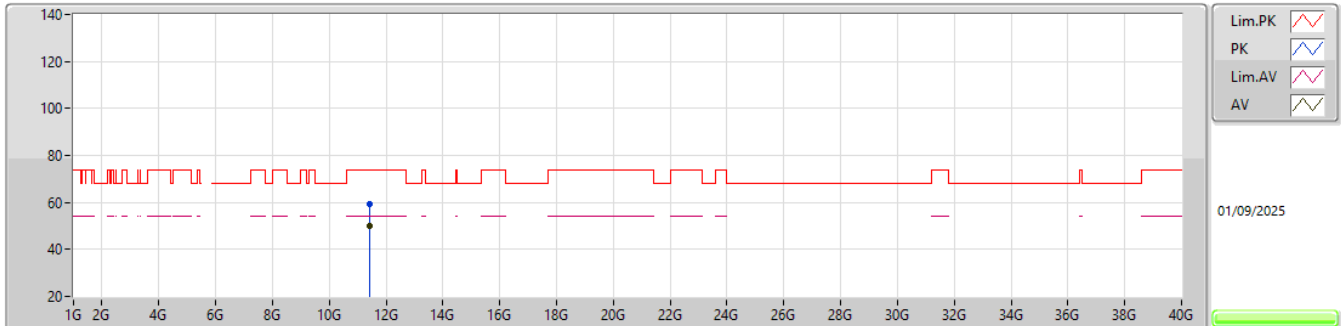EUT_Y_4TX
Setting 91
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43178G	59.37	74.00	-14.63	74.64	3	Vertical	307	1.80	-	39.10	11.83	66.20			
AV	11.44207G	50.22	54.00	-3.78	65.49	3	Vertical	307	1.80	-	39.10	11.83	66.20			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

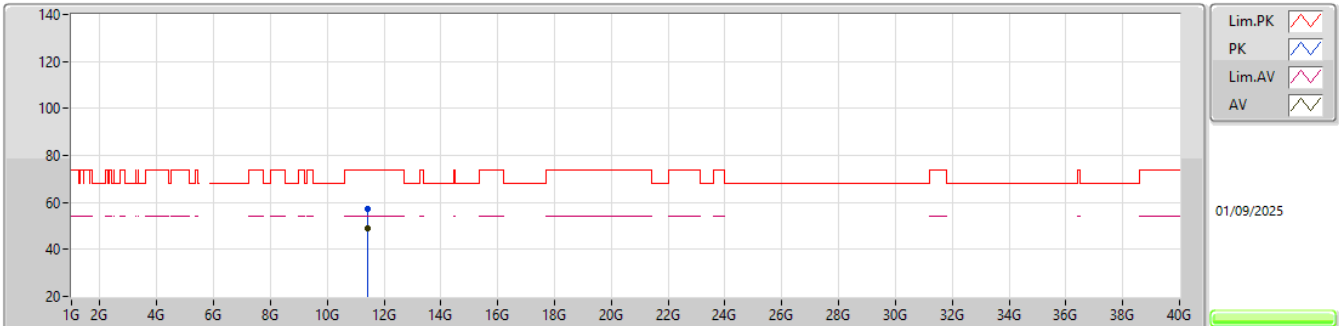


EUT_Y_4TX
Setting 91
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.44087G	57.43	74.00	-16.57	72.70	3	Horizontal	31	1.75	-	39.10	11.83	66.20			
AV	11.4409G	49.09	54.00	-4.91	64.36	3	Horizontal	31	1.75	-	39.10	11.83	66.20			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

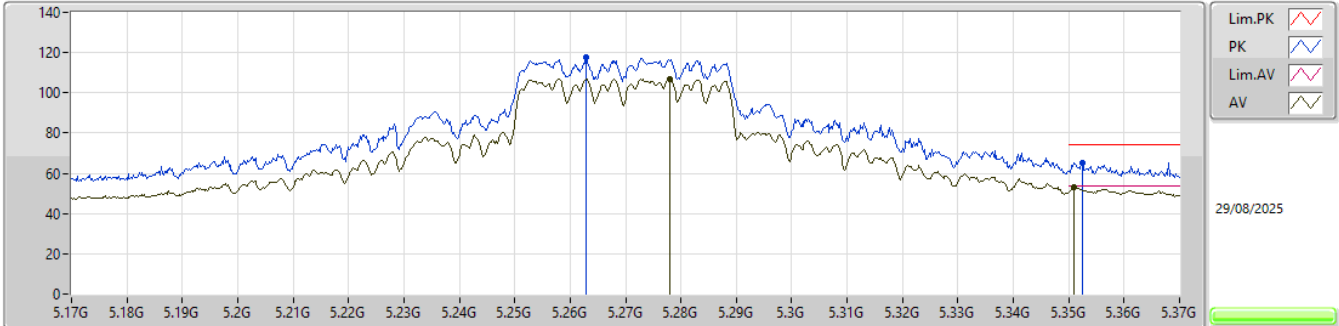


EUT_Y_4TX
SET 77
80\67\84\76\79\78\77
-3.22\4.82\ -9.08\1.96\ -1.81\ -0.12\1.08

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2628G	117.55	Inf	-Inf	111.52	3	Vertical	346	1.80	77	32.97	8.13	35.07				
AV	5.278G	106.82	Inf	-Inf	100.80	3	Vertical	346	1.80	77	32.94	8.14	35.06				
PK	5.3524G	65.45	74.00	-8.55	59.40	3	Vertical	346	1.80	77	32.90	8.18	35.03				
AV	5.351G	52.92	54.00	-1.08	46.87	3	Vertical	346	1.80	77	32.90	8.18	35.03				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

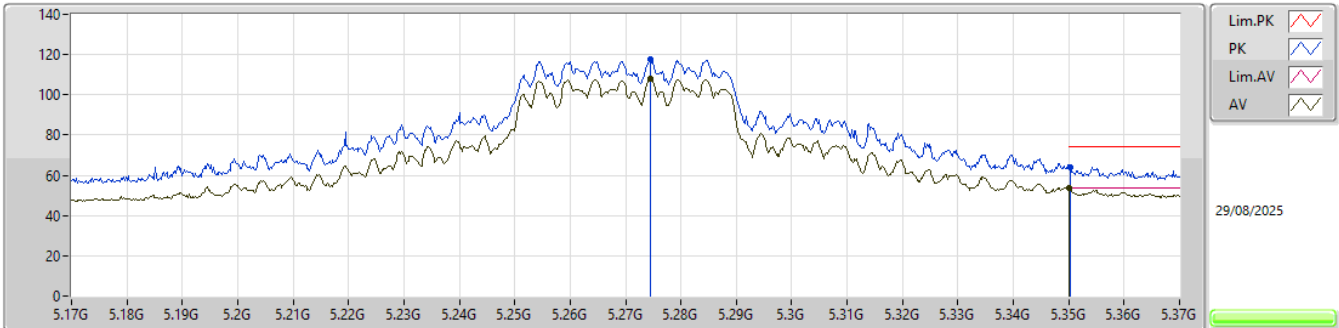


EUT Y_4TX
SET 77
77
0.15

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2744G	117.62	Inf	-Inf	111.59	3	Horizontal	350	1.80	77	32.95	8.14	35.06				
AV	5.2744G	107.96	Inf	-Inf	101.93	3	Horizontal	350	1.80	77	32.95	8.14	35.06				
PK	5.3502G	64.22	74.00	-9.78	58.17	3	Horizontal	350	1.80	77	32.90	8.18	35.03				
AV	5.35G	53.85	54.00	-0.15	47.80	3	Horizontal	350	1.80	77	32.90	8.18	35.03				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

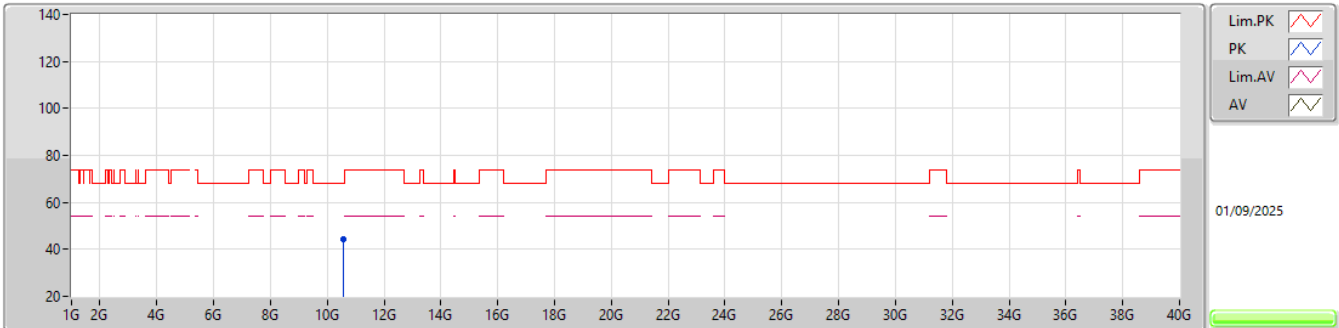


EUT_Y_4TX
Setting 77
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.54963G	44.52	68.20	-23.68	60.94	3	Vertical	137	2.42	-	38.90	11.36	66.68				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

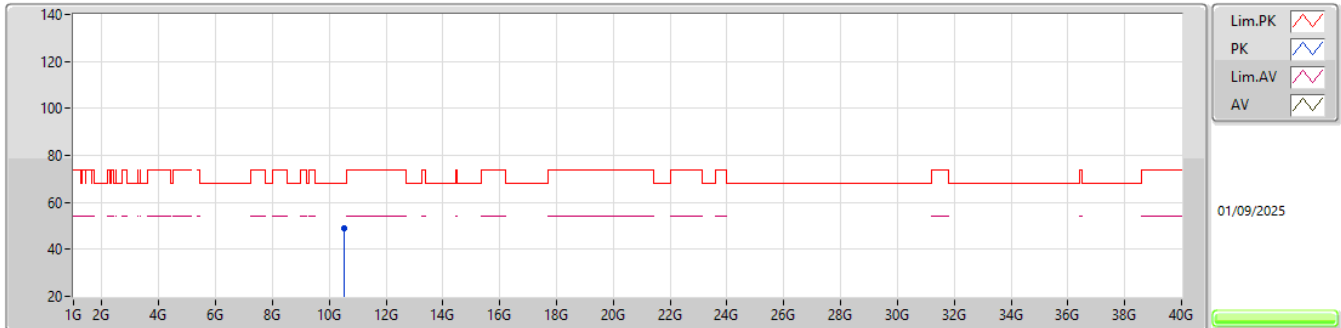


EUT_Y_4TX
Setting 77
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.53361G	48.78	68.20	-19.42	65.25	3	Horizontal	39	1.80	-	38.87	11.35	66.69				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

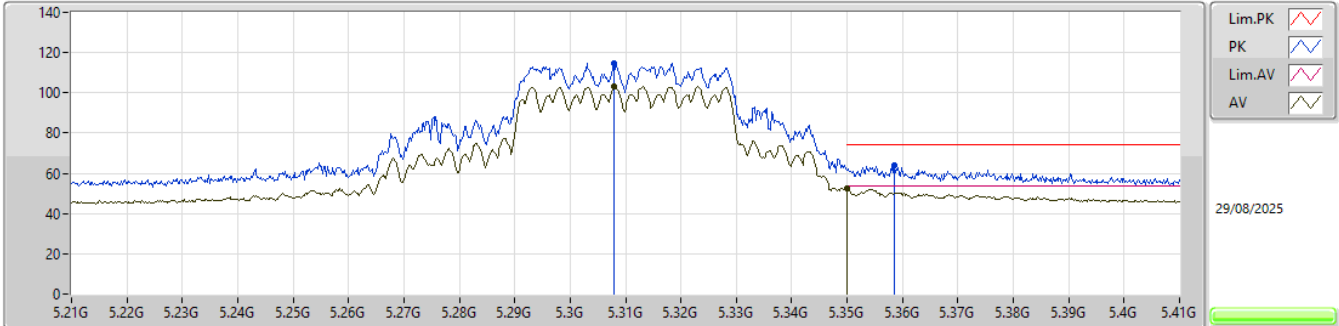


EUT_Y_4TX
SET 76
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.308G	114.70	Inf	-Inf	110.37	3	Vertical	343	1.51	-	31.22	6.87	33.76			
AV	5.308G	103.18	Inf	-Inf	98.85	3	Vertical	343	1.51	-	31.22	6.87	33.76			
PK	5.3586G	63.83	74.00	-10.17	59.41	3	Vertical	343	1.51	-	31.32	6.87	33.77			
AV	5.35G	52.59	54.00	-1.41	48.19	3	Vertical	343	1.51	-	31.30	6.87	33.77			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

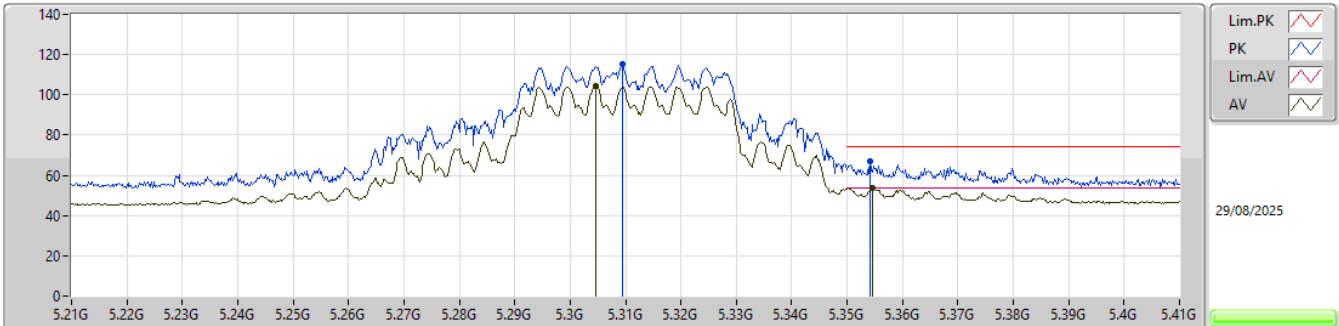


EUT_Y_4TX
SET 76
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3094G	115.31	Inf	-Inf	110.98	3	Horizontal	352	1.99	-	31.22	6.87	33.76			
AV	5.3046G	104.63	Inf	-Inf	100.31	3	Horizontal	352	1.99	-	31.21	6.87	33.76			
PK	5.3542G	66.81	74.00	-7.19	62.40	3	Horizontal	352	1.99	-	31.31	6.87	33.77			
AV	5.3546G	53.50	54.00	-0.50	49.09	3	Horizontal	352	1.99	-	31.31	6.87	33.77			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

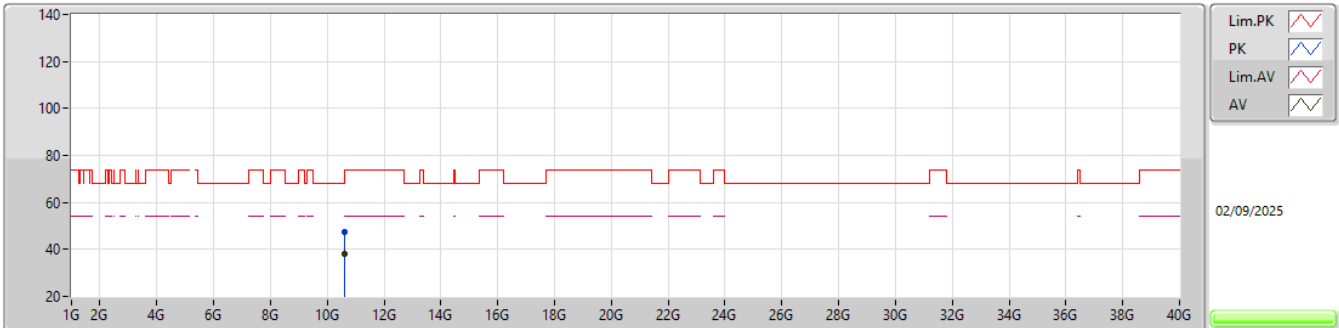


EUT_Y_4TX
Setting 76
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.61886G	47.22	74.00	-26.78	63.14	3	Vertical	44	1.80	-	39.28	11.40	66.60			
AV	10.61853G	38.09	54.00	-15.91	54.02	3	Vertical	44	1.80	-	39.27	11.40	66.60			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

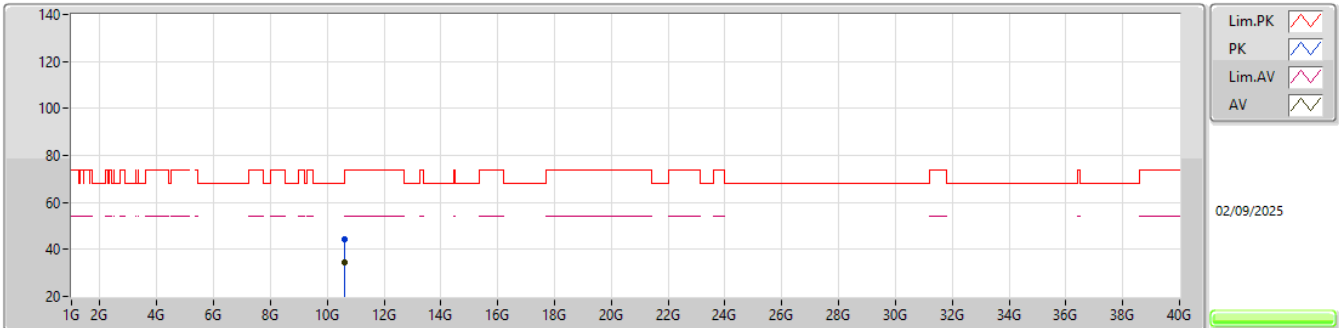


EUT_V_4TX
Setting 76
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60881G	44.32	74.00	-29.68	60.30	3	Horizontal	178	2.00	-	39.24	11.39	66.61			
AV	10.60854G	34.66	54.00	-19.34	50.65	3	Horizontal	178	2.00	-	39.23	11.39	66.61			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

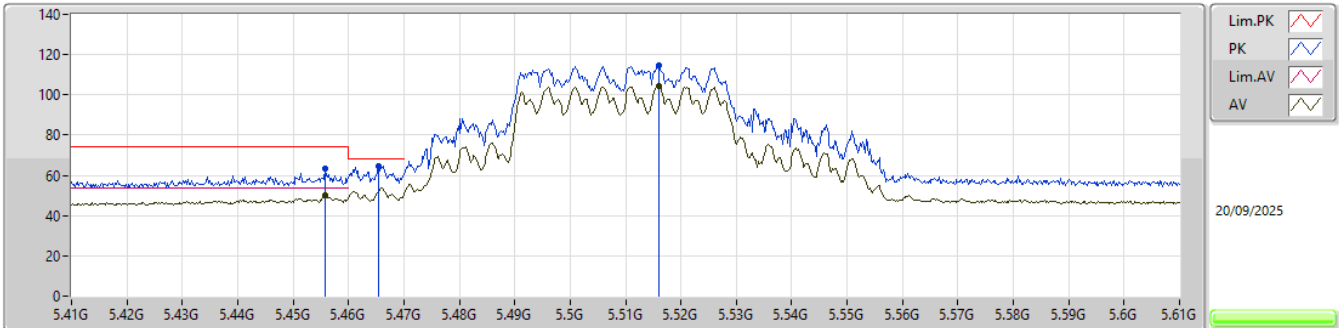


EUT_Y_4TX
SET 74
06-H-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4558G	63.20	74.00	-10.80	58.59	3	Vertical	348	2.03	-	31.52	6.89	33.80			
AV	5.4558G	49.81	54.00	-4.19	45.20	3	Vertical	348	2.03	-	31.52	6.89	33.80			
PK	5.4654G	64.36	68.20	-3.84	59.71	3	Vertical	348	2.03	-	31.56	6.89	33.80			
PK	5.516G	114.86	Inf	-Inf	110.07	3	Vertical	348	2.03	-	31.70	6.90	33.81			
AV	5.516G	104.10	Inf	-Inf	99.31	3	Vertical	348	2.03	-	31.70	6.90	33.81			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

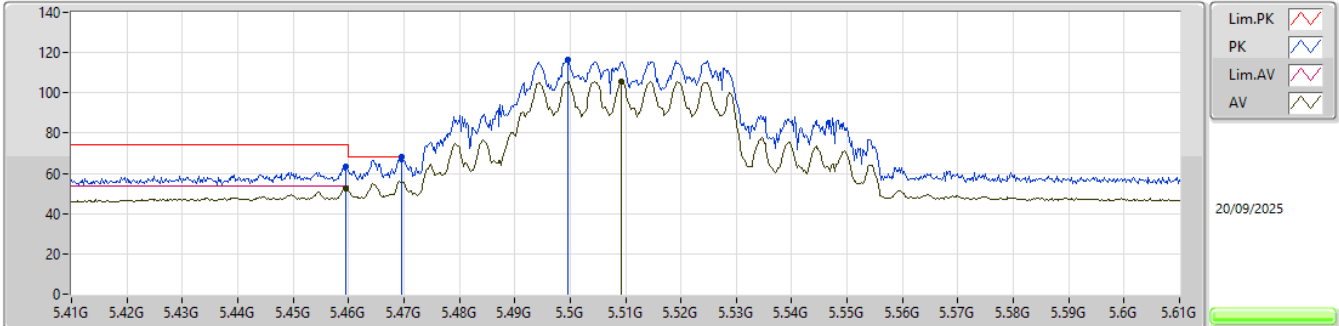


EUT_Y_4TX
SET 74
06-H-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4594G	63.61	74.00	-10.39	58.98	3	Horizontal	351	1.80	-	31.54	6.89	33.80			
AV	5.4596G	52.70	54.00	-1.30	48.07	3	Horizontal	351	1.80	-	31.54	6.89	33.80			
PK	5.4696G	68.05	68.20	-0.15	63.38	3	Horizontal	351	1.80	-	31.58	6.89	33.80			
PK	5.4996G	116.55	Inf	-Inf	111.77	3	Horizontal	351	1.80	-	31.70	6.89	33.81			
AV	5.5092G	105.90	Inf	-Inf	101.11	3	Horizontal	351	1.80	-	31.70	6.90	33.81			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

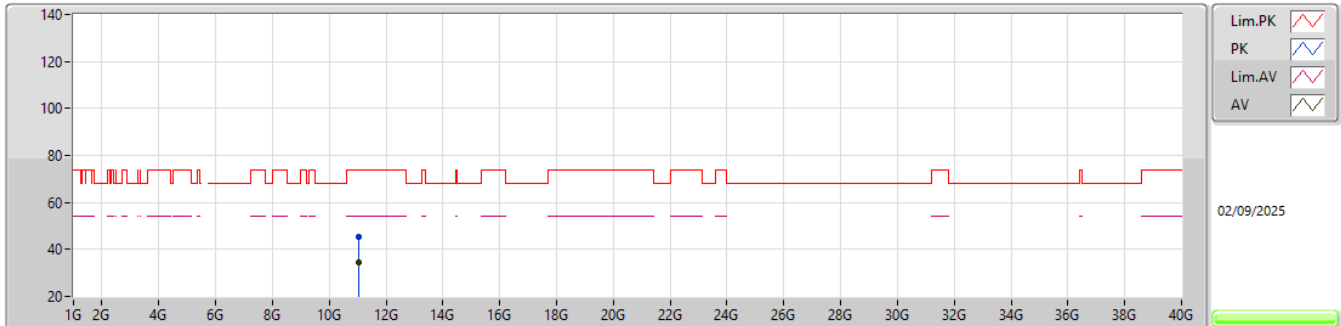


EUT_V_4TX
Setting 74
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.01836G	45.34	74.00	-28.66	60.98	3	Vertical	224	1.87	-	38.94	11.61	66.19			
AV	11.01838G	34.70	54.00	-19.30	50.34	3	Vertical	224	1.87	-	38.94	11.61	66.19			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

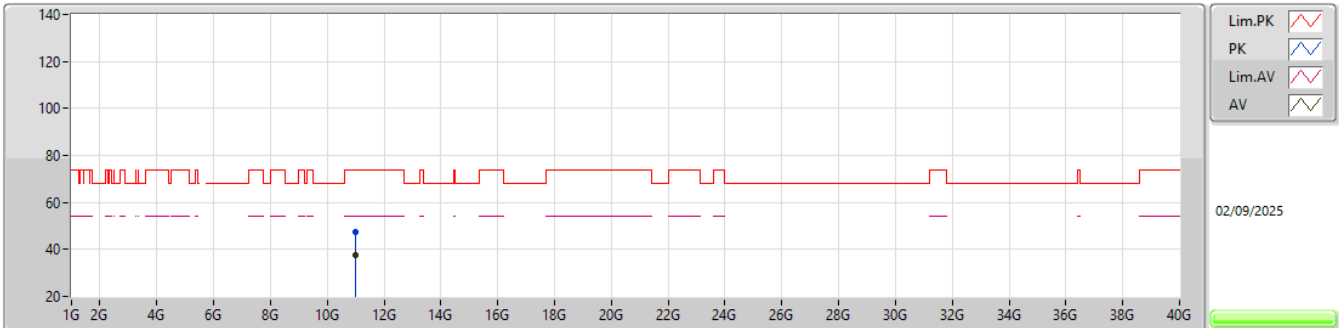


EUT_V_4TX
Setting 74
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01335G	47.29	74.00	-26.71	62.94	3	Horizontal	3	1.80	-	38.93	11.61	66.19			
AV	11.01337G	37.38	54.00	-16.62	53.03	3	Horizontal	3	1.80	-	38.93	11.61	66.19			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

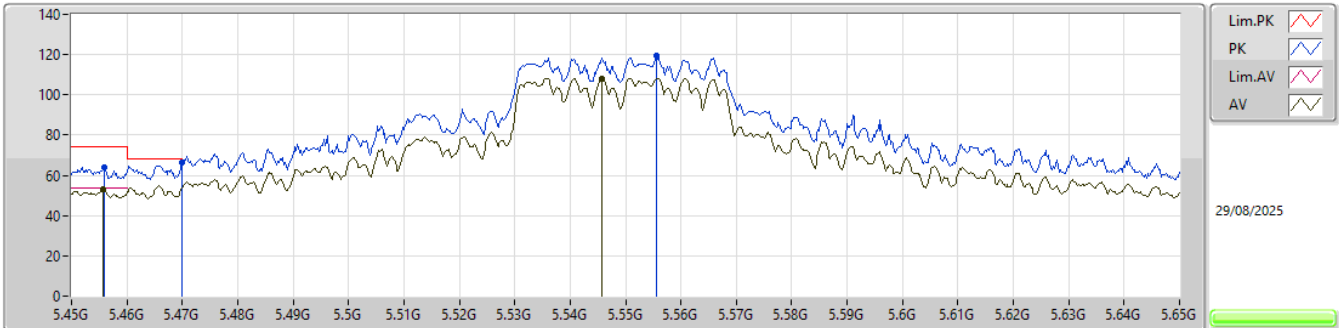


EUT_Y_4TX
SET 79
80\78\79
-0.32\2.42\1.06

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.456G	64.18	74.00	-9.82	58.01	3	Vertical	344	1.80	79	32.91	8.26	35.00			
AV	5.4558G	52.94	54.00	-1.06	46.77	3	Vertical	344	1.80	79	32.91	8.26	35.00			
PK	5.47G	66.59	68.20	-1.61	60.37	3	Vertical	344	1.80	79	32.94	8.27	34.99			
PK	5.5556G	119.22	Inf	-Inf	112.83	3	Vertical	344	1.80	79	32.99	8.35	34.95			
AV	5.5458G	108.21	Inf	-Inf	101.83	3	Vertical	344	1.80	79	33.00	8.34	34.96			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

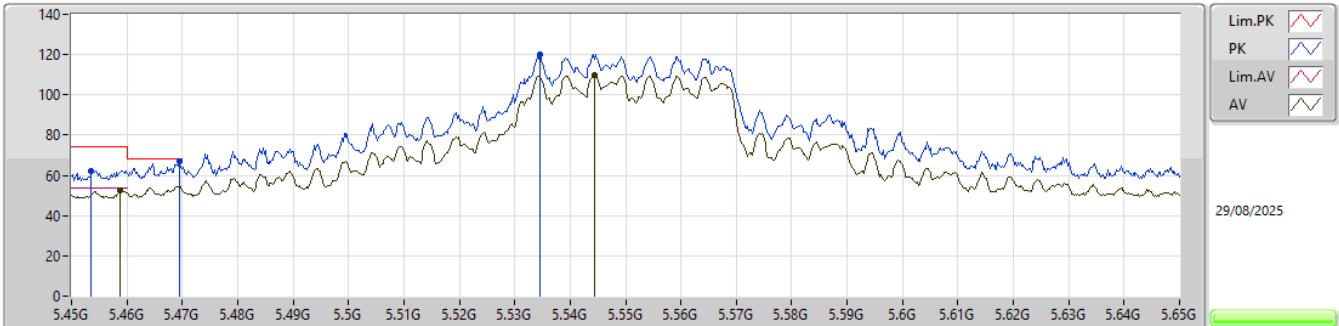


EUT_Y_4TX
SET 77
79\75\77\78\77
-0.77\2.92\0.95\ -3.25\1.27

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4536G	62.38	74.00	-11.62	56.21	3	Horizontal	340	1.80	77	32.91	8.26	35.00			
AV	5.4588G	52.45	54.00	-1.55	46.26	3	Horizontal	340	1.80	77	32.92	8.26	34.99			
PK	5.4694G	66.93	68.20	-1.27	60.71	3	Horizontal	340	1.80	77	32.94	8.27	34.99			
PK	5.5346G	120.08	Inf	-Inf	113.71	3	Horizontal	340	1.80	77	33.00	8.33	34.96			
AV	5.5444G	109.54	Inf	-Inf	103.16	3	Horizontal	340	1.80	77	33.00	8.34	34.96			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5550MHz_TX

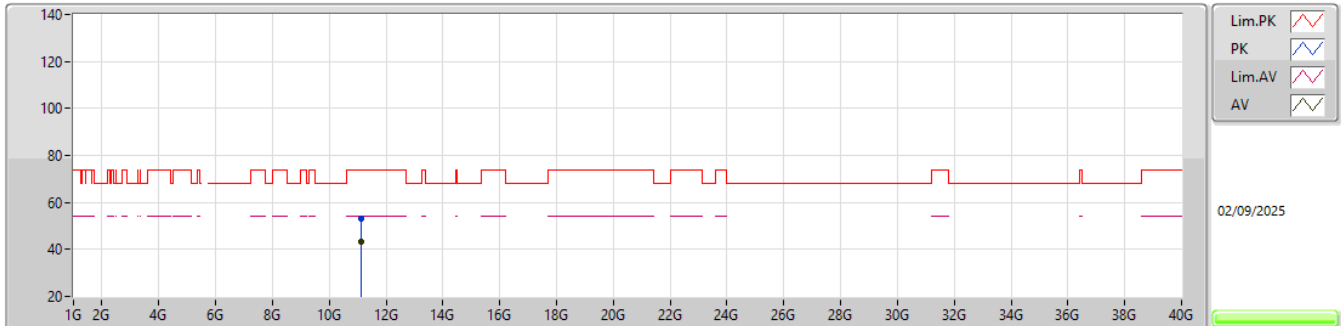EUT_Y_4TX
Setting 77
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.10625G	53.05	74.00	-20.95	68.49	3	Vertical	308	1.80	-	39.09	11.66	66.19			
AV	11.10696G	43.46	54.00	-10.54	58.90	3	Vertical	308	1.80	-	39.09	11.66	66.19			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

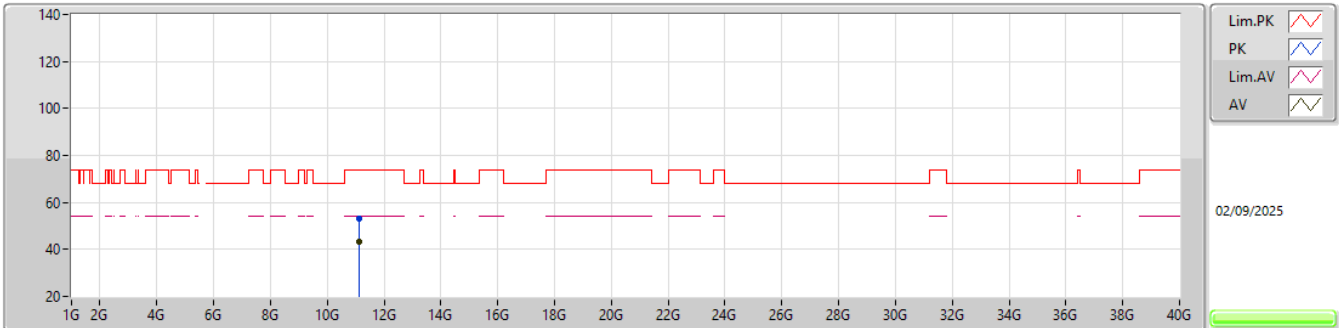


EUT_Y_4TX
Setting 77
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.10882G	53.19	74.00	-20.81	68.64	3	Horizontal	78	2.50	-	39.08	11.66	66.19			
AV	11.10885G	43.49	54.00	-10.51	58.94	3	Horizontal	78	2.50	-	39.08	11.66	66.19			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

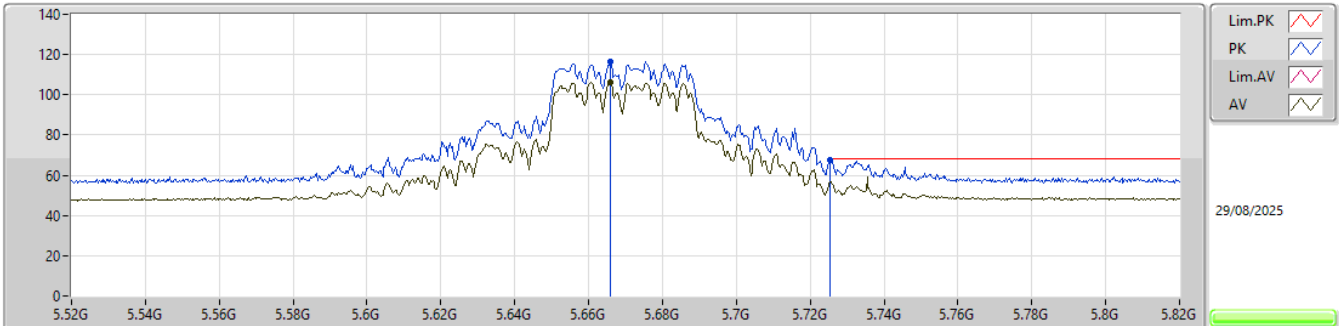


EUT_Y_4TX
SET 72
80\51\75\63\69\72
-7.18\6.24\3.18\3.28\0.72\0.40

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6658G	116.67	Inf	-Inf	110.03	3	Vertical	341	1.80	72	33.13	8.41	34.90			
AV	5.6658G	106.01	Inf	-Inf	99.37	3	Vertical	341	1.80	72	33.13	8.41	34.90			
PK	5.7255G	67.80	68.20	-0.40	60.74	3	Vertical	341	1.80	72	33.50	8.43	34.87			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

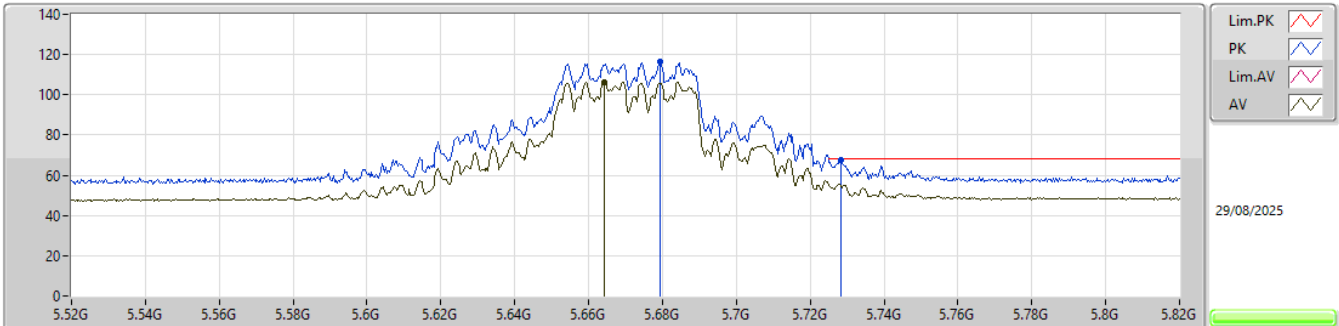


EUT_Y_4TX
SET 69
72\67\69
-1.25\1.60\0.35

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6793G	116.40	Inf	-Inf	109.65	3	Horizontal	342	1.80	69	33.23	8.41	34.89			
AV	5.6643G	106.22	Inf	-Inf	99.60	3	Horizontal	342	1.80	69	33.11	8.41	34.90			
PK	5.7282G	67.85	68.20	-0.35	60.78	3	Horizontal	342	1.80	69	33.51	8.43	34.87			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

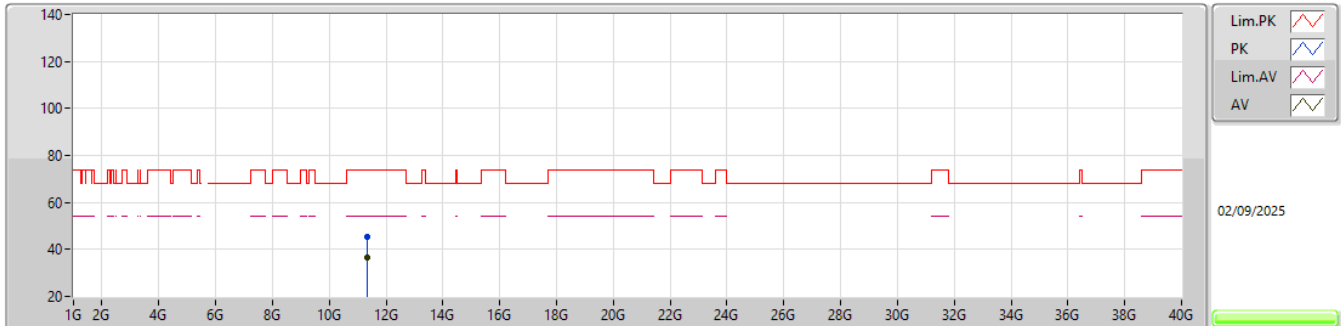


EUT Y_4TX
Setting 69
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.34168G	45.45	74.00	-28.55	60.77	3	Vertical	318	2.56	-	39.10	11.78	66.20			
AV	11.34162G	36.31	54.00	-17.69	51.63	3	Vertical	318	2.56	-	39.10	11.78	66.20			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5670MHz_TX

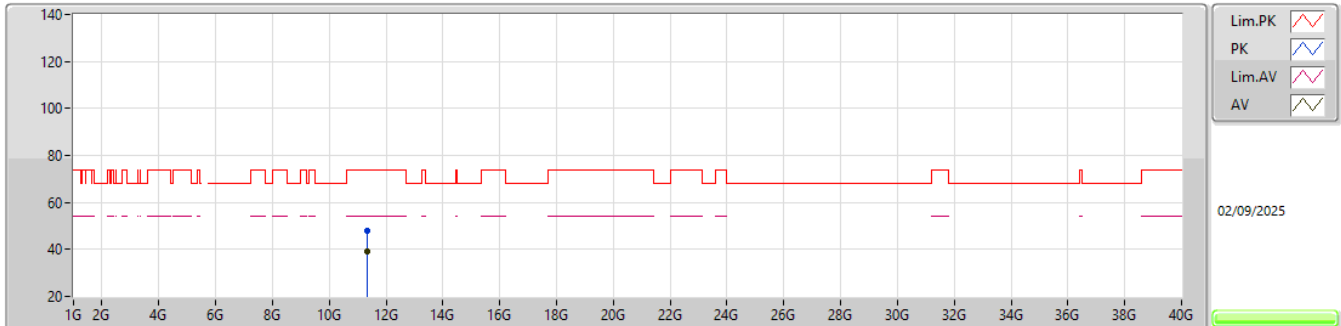EUT_Y_4TX
Setting 69
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.33829G	47.70	74.00	-26.30	63.02	3	Horizontal	319	1.80	-	39.10	11.78	66.20			
AV	11.33826G	39.07	54.00	-14.93	54.39	3	Horizontal	319	1.80	-	39.10	11.78	66.20			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

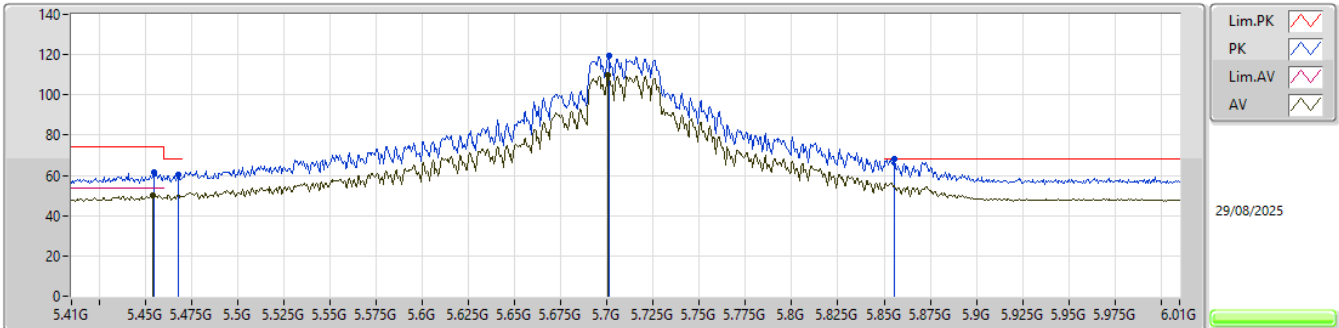


EUT_Y_4TX
SET 88
80\106\76\91\84\87\88
6.61\15.82\6.62\2.35\5.52\0.64\0.24

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4544G	61.44	74.00	-12.56	55.27	3	Vertical	340	1.80	88	32.91	8.26	35.00			
AV	5.4538G	50.09	54.00	-3.91	43.92	3	Vertical	340	1.80	88	32.91	8.26	35.00			
PK	5.4676G	60.10	68.20	-8.10	53.88	3	Vertical	340	1.80	88	32.94	8.27	34.99			
PK	5.701G	119.61	Inf	-Inf	112.67	3	Vertical	340	1.80	88	33.40	8.42	34.88			
AV	5.7004G	109.92	Inf	-Inf	102.98	3	Vertical	340	1.80	88	33.40	8.42	34.88			
PK	5.8558G	67.96	68.20	-0.24	60.37	3	Vertical	340	1.80	88	33.92	8.48	34.81			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

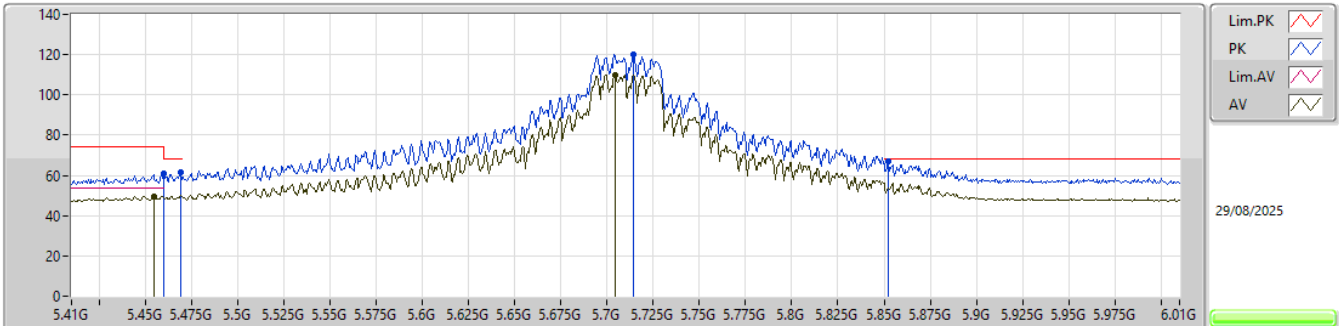


EUT_Y_4TX
SET 87
88\87
-0.17\1.00

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4598G	60.89	74.00	-13.11	54.70	3	Horizontal	338	1.80	87	32.92	8.26	34.99			
AV	5.4544G	49.74	54.00	-4.26	43.57	3	Horizontal	338	1.80	87	32.91	8.26	35.00			
PK	5.4694G	61.37	68.20	-6.83	55.15	3	Horizontal	338	1.80	87	32.94	8.27	34.99			
PK	5.7142G	119.98	Inf	-Inf	112.98	3	Horizontal	338	1.80	87	33.46	8.42	34.88			
AV	5.7046G	109.96	Inf	-Inf	103.00	3	Horizontal	338	1.80	87	33.42	8.42	34.88			
PK	5.8522G	67.20	68.20	-1.00	59.63	3	Horizontal	338	1.80	87	33.91	8.47	34.81			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5710MHz Straddle 5.47-5.725GHz_TX

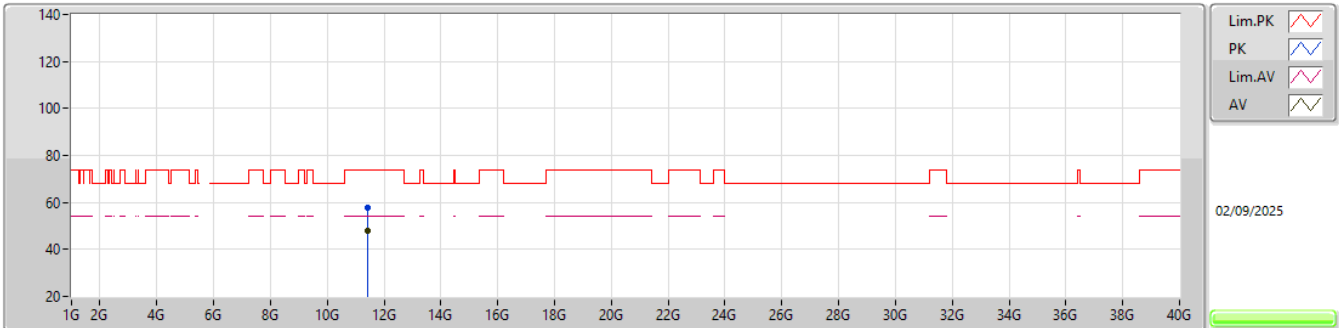EUT_Y_4TX
Setting 87
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.41856G	57.68	74.00	-16.32	72.96	3	Vertical	304	1.21	-	39.10	11.82	66.20			
AV	11.42003G	47.95	54.00	-6.05	63.23	3	Vertical	304	1.21	-	39.10	11.82	66.20			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5710MHz Straddle 5.47-5.725GHz_TX

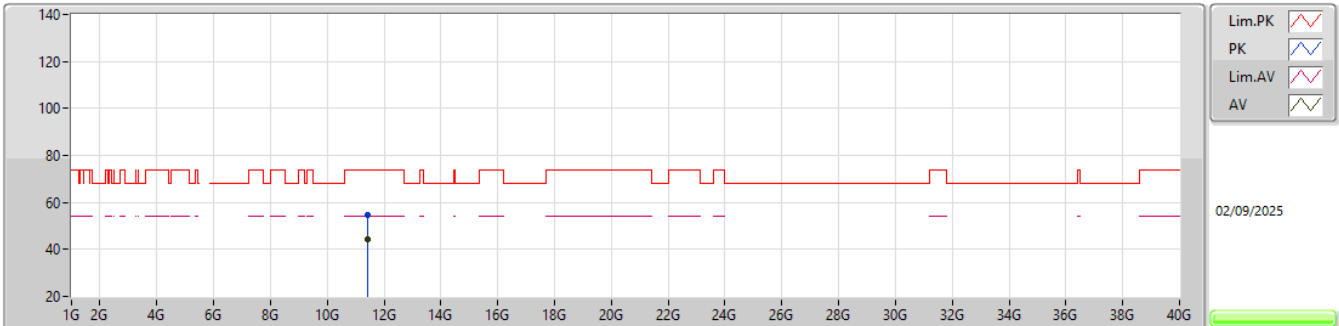EUT_Y_4TX
Setting 87
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.41103G	54.87	74.00	-19.13	70.15	3	Horizontal	31	1.80	-	39.10	11.82	66.20			
AV	11.42096G	44.47	54.00	-9.53	59.75	3	Horizontal	31	1.80	-	39.10	11.82	66.20			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

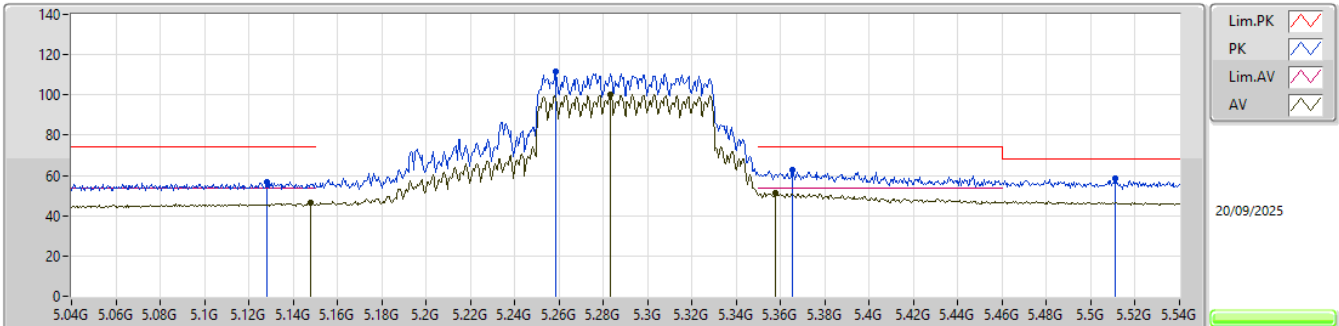


EUT_Y_4TX
SET 75
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.128G	56.59	74.00	-17.41	51.74	3	Vertical	343	1.64	-	31.81	6.75	33.71			
AV	5.148G	46.28	54.00	-7.72	41.34	3	Vertical	343	1.64	-	31.89	6.77	33.72			
PK	5.2585G	111.38	Inf	-Inf	106.99	3	Vertical	343	1.64	-	31.28	6.86	33.75			
AV	5.283G	100.14	Inf	-Inf	95.80	3	Vertical	343	1.64	-	31.23	6.86	33.75			
PK	5.3655G	62.80	74.00	-11.20	58.38	3	Vertical	343	1.64	-	31.33	6.87	33.78			
AV	5.3575G	51.35	54.00	-2.65	46.93	3	Vertical	343	1.64	-	31.32	6.87	33.77			
PK	5.511G	58.32	68.20	-9.88	53.53	3	Vertical	343	1.64	-	31.70	6.90	33.81			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

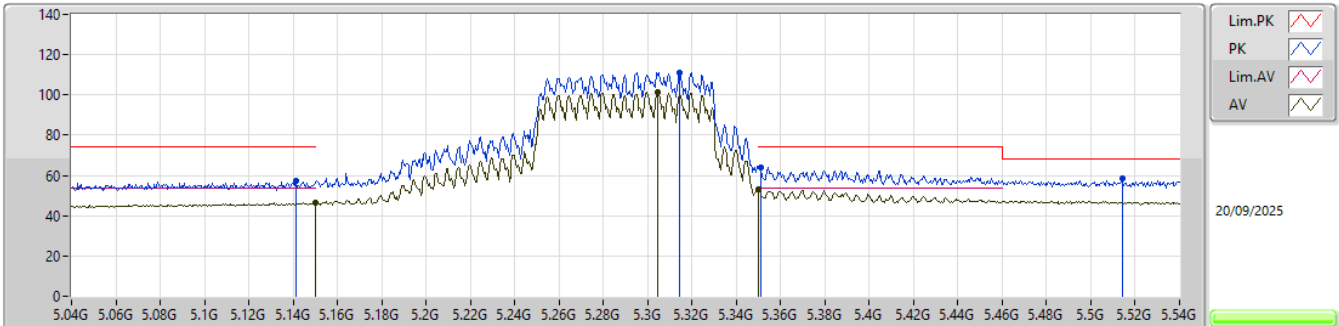


EUT_Y_4TX
SET 75
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1415G	57.21	74.00	-16.79	52.29	3	Horizontal	353	1.84	-	31.87	6.77	33.72			
AV	5.15G	46.49	54.00	-7.51	41.53	3	Horizontal	353	1.84	-	31.90	6.78	33.72			
PK	5.3145G	111.15	Inf	-Inf	106.81	3	Horizontal	353	1.84	-	31.23	6.87	33.76			
AV	5.3045G	101.22	Inf	-Inf	96.90	3	Horizontal	353	1.84	-	31.21	6.87	33.76			
PK	5.351G	63.88	74.00	-10.12	59.48	3	Horizontal	353	1.84	-	31.30	6.87	33.77			
AV	5.35G	53.21	54.00	-0.79	48.81	3	Horizontal	353	1.84	-	31.30	6.87	33.77			
PK	5.514G	58.75	68.20	-9.45	53.96	3	Horizontal	353	1.84	-	31.70	6.90	33.81			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

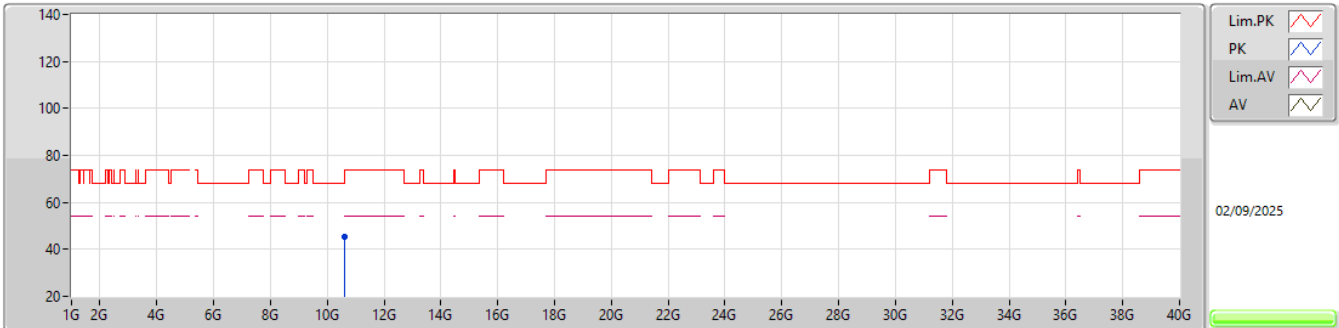


EUT_Y_4TX
Setting 75
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.59047G	45.51	68.20	-22.69	61.62	3	Vertical	45	1.80	-	39.14	11.38	66.63				

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

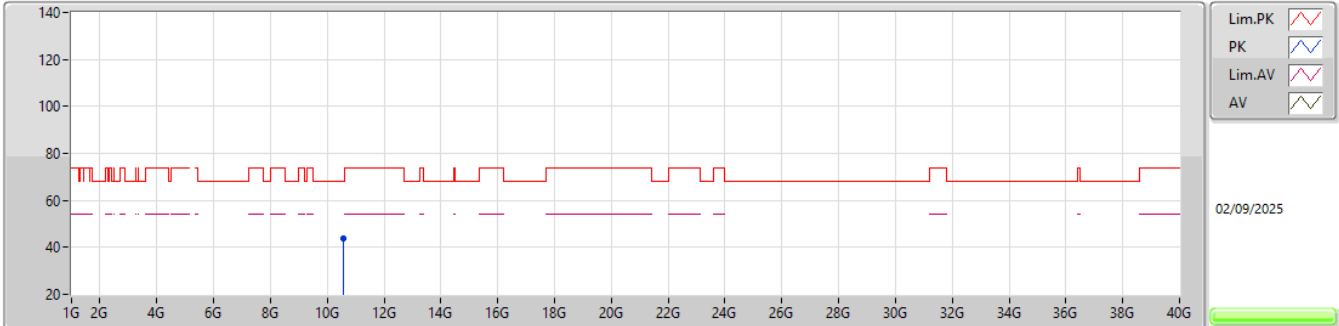


EUT_Y_4TX
Setting 75
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57229G	43.79	68.20	-24.41	60.04	3	Horizontal	84	1.68	-	39.03	11.37	66.65			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

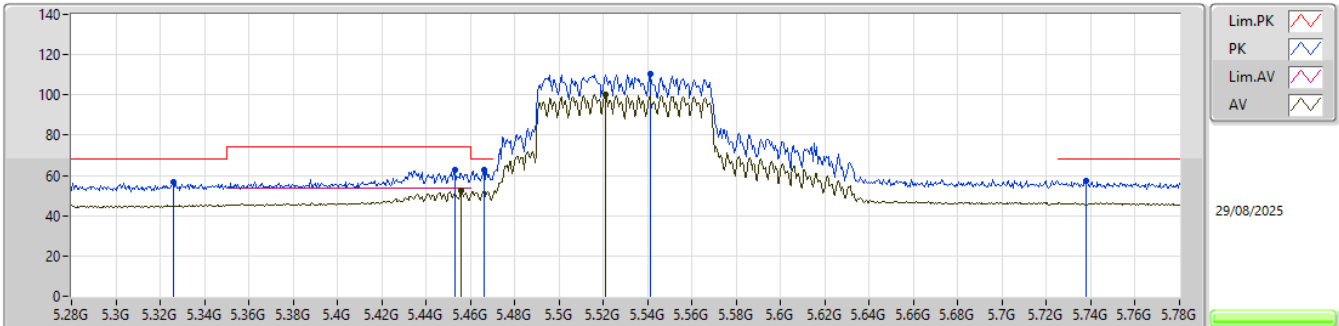


EUT_Y_4TX
SET 72
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.326G	56.46	68.20	-11.74	52.10	3	Vertical	344	1.80	-	31.25	6.87	33.76
PK	5.453G	62.48	74.00	-11.52	57.88	3	Vertical	344	1.80	-	31.51	6.89	33.80
AV	5.456G	52.43	54.00	-1.57	47.82	3	Vertical	344	1.80	-	31.52	6.89	33.80
PK	5.466G	62.84	68.20	-5.36	58.19	3	Vertical	344	1.80	-	31.56	6.89	33.80
PK	5.541G	110.50	Inf	-Inf	105.71	3	Vertical	344	1.80	-	31.70	6.90	33.81
AV	5.521G	100.27	Inf	-Inf	95.48	3	Vertical	344	1.80	-	31.70	6.90	33.81
PK	5.738G	57.03	68.20	-11.17	51.71	3	Vertical	344	1.80	-	32.00	7.10	33.78

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

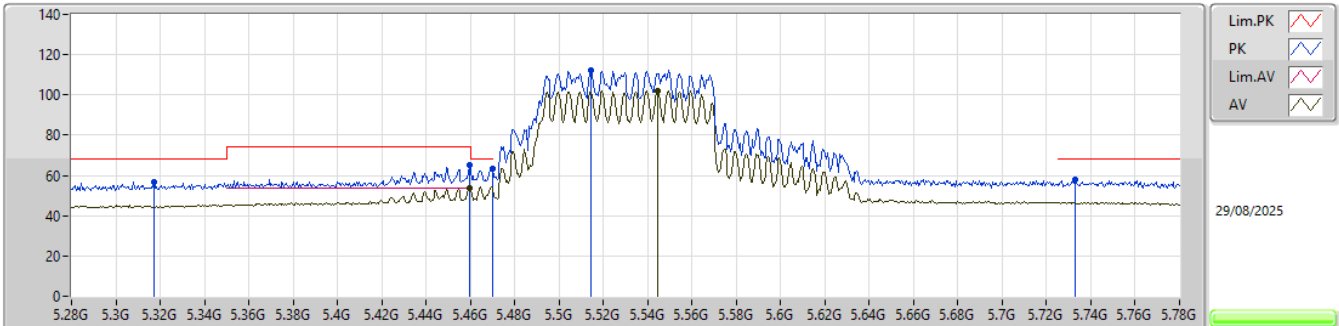


EUT_Y_4TX
SET 72
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3175G	56.59	68.20	-11.61	52.25	3	Horizontal	352	1.80	-	31.23	6.87	33.76
PK	5.4595G	64.99	74.00	-9.01	60.36	3	Horizontal	352	1.80	-	31.54	6.89	33.80
AV	5.4595G	53.71	54.00	-0.29	49.08	3	Horizontal	352	1.80	-	31.54	6.89	33.80
PK	5.47G	63.48	68.20	-4.72	58.81	3	Horizontal	352	1.80	-	31.58	6.89	33.80
PK	5.5145G	112.24	Inf	-Inf	107.45	3	Horizontal	352	1.80	-	31.70	6.90	33.81
AV	5.5445G	102.21	Inf	-Inf	97.41	3	Horizontal	352	1.80	-	31.70	6.90	33.80
PK	5.733G	57.83	68.20	-10.37	52.52	3	Horizontal	352	1.80	-	32.00	7.09	33.78

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

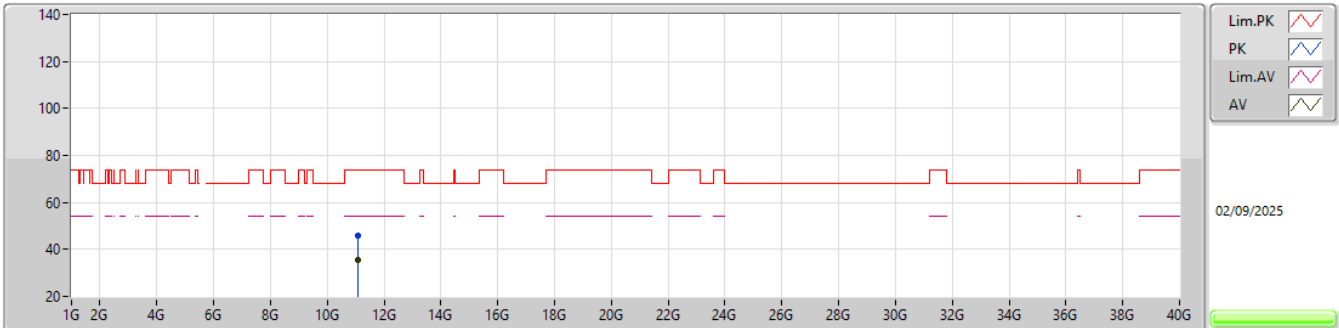


EUT_V_4TX
Setting 72
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.07425G	45.95	74.00	-28.05	61.45	3	Vertical	43	1.80	-	39.05	11.64	66.19			
AV	11.0621G	35.69	54.00	-18.31	51.23	3	Vertical	43	1.80	-	39.02	11.63	66.19			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

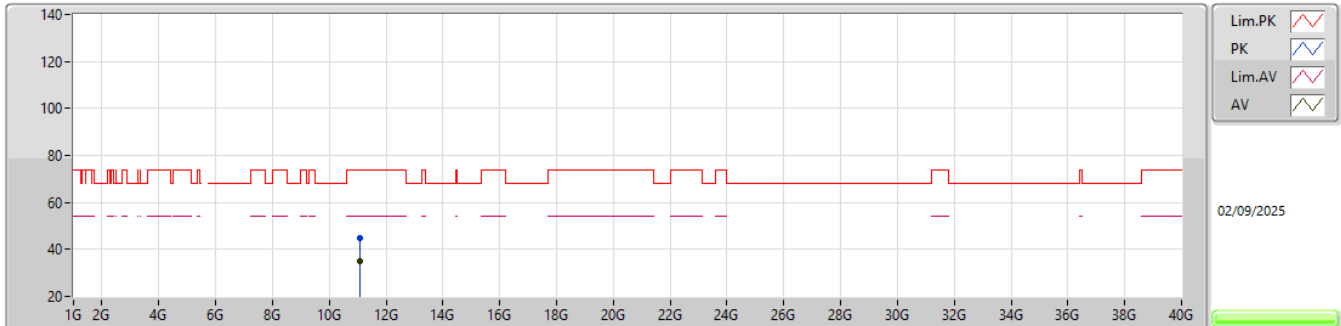


EUT V_4TX
Setting 72
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.06327G	45.04	74.00	-28.96	60.57	3	Horizontal	311	1.80	-	39.03	11.63	66.19			
AV	11.06849G	35.07	54.00	-18.93	50.58	3	Horizontal	311	1.80	-	39.04	11.64	66.19			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

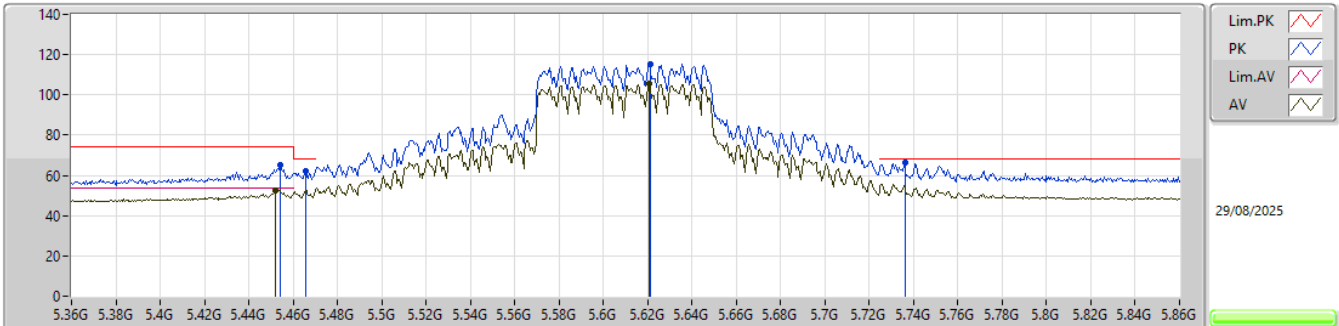


EUT_Y_4TX
SET 75
80\60\84\72\78\75\76\75
-4.81\6.28\7.77\4.50\2.17\1.33\0.31\1.42

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.454G	65.10	74.00	-8.90	58.93	3	Vertical	340	1.80	75	32.91	8.26	35.00
AV	5.452G	52.58	54.00	-1.42	46.42	3	Vertical	340	1.80	75	32.90	8.26	35.00
PK	5.4655G	62.43	68.20	-5.77	56.22	3	Vertical	340	1.80	75	32.93	8.27	34.99
PK	5.621G	115.53	Inf	-Inf	109.11	3	Vertical	340	1.80	75	32.94	8.40	34.92
AV	5.6205G	105.36	Inf	-Inf	98.94	3	Vertical	340	1.80	75	32.94	8.40	34.92
PK	5.736G	66.55	68.20	-1.65	59.45	3	Vertical	340	1.80	75	33.54	8.43	34.87

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

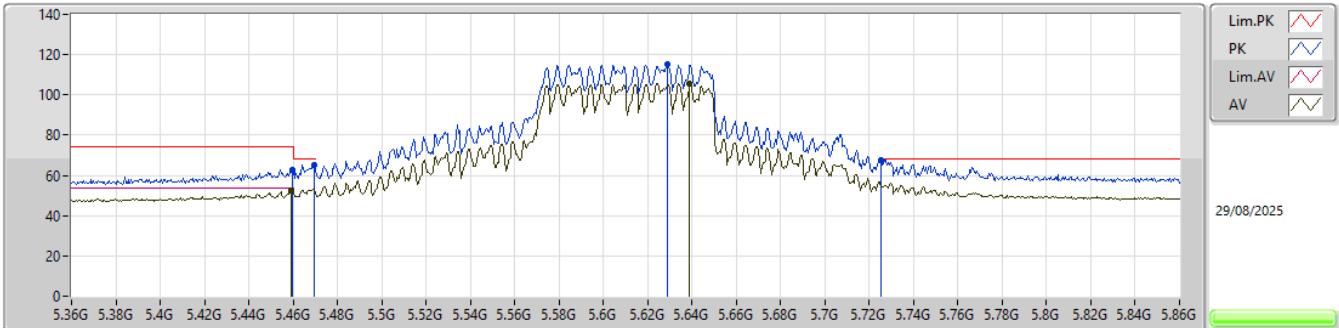


EUT_Y_4TX
SET 75
75
0.40

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4595G	63.04	74.00	-10.96	56.85	3	Horizontal	343	1.80	75	32.92	8.26	34.99			
AV	5.459G	52.36	54.00	-1.64	46.17	3	Horizontal	343	1.80	75	32.92	8.26	34.99			
PK	5.4695G	65.11	68.20	-3.09	58.89	3	Horizontal	343	1.80	75	32.94	8.27	34.99			
PK	5.629G	115.44	Inf	-Inf	109.00	3	Horizontal	343	1.80	75	32.96	8.40	34.92			
AV	5.639G	105.69	Inf	-Inf	99.22	3	Horizontal	343	1.80	75	32.98	8.40	34.91			
PK	5.7255G	67.80	68.20	-0.40	60.74	3	Horizontal	343	1.80	75	33.50	8.43	34.87			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

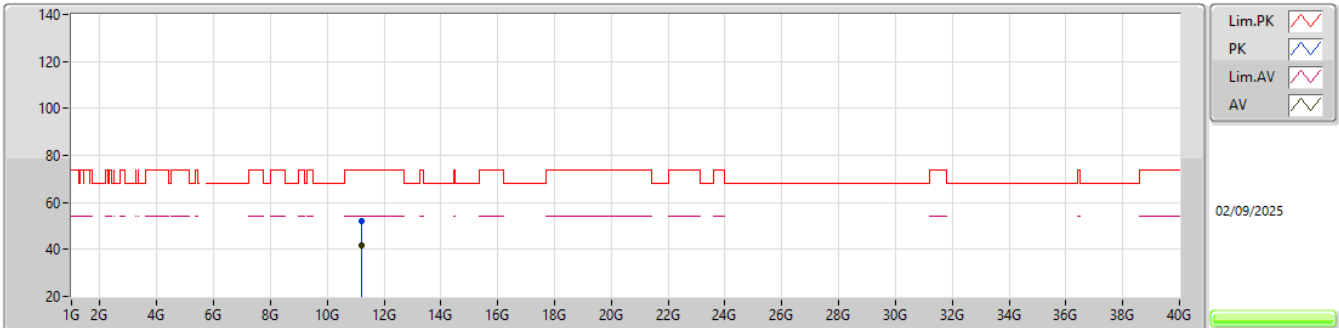


EUT_Y_4TX
Setting 75
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.21687G	52.11	74.00	-21.89	67.59	3	Vertical	310	1.80	-	39.00	11.71	66.19			
AV	11.21688G	41.66	54.00	-12.34	57.14	3	Vertical	310	1.80	-	39.00	11.71	66.19			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

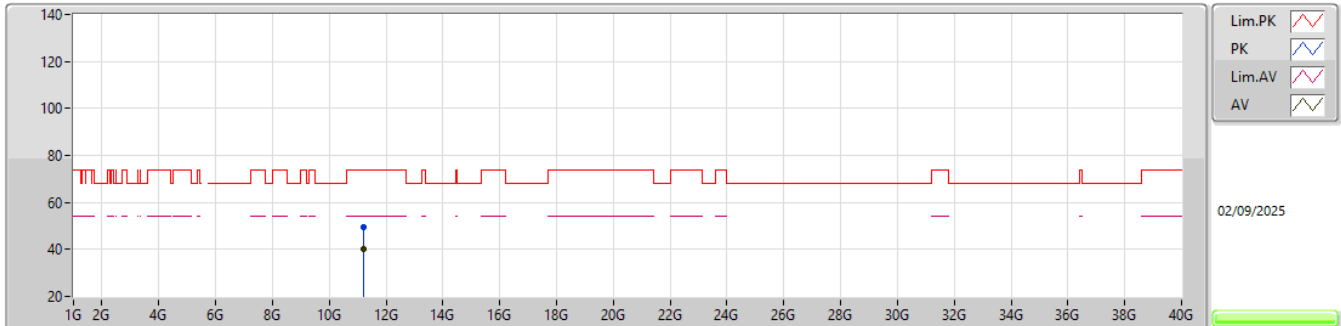


EUT_Y_4TX
Setting 75
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.22804G	49.64	74.00	-24.36	65.11	3	Horizontal	308	1.80	-	39.00	11.72	66.19			
AV	11.22828G	40.00	54.00	-14.00	55.47	3	Horizontal	308	1.80	-	39.00	11.72	66.19			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

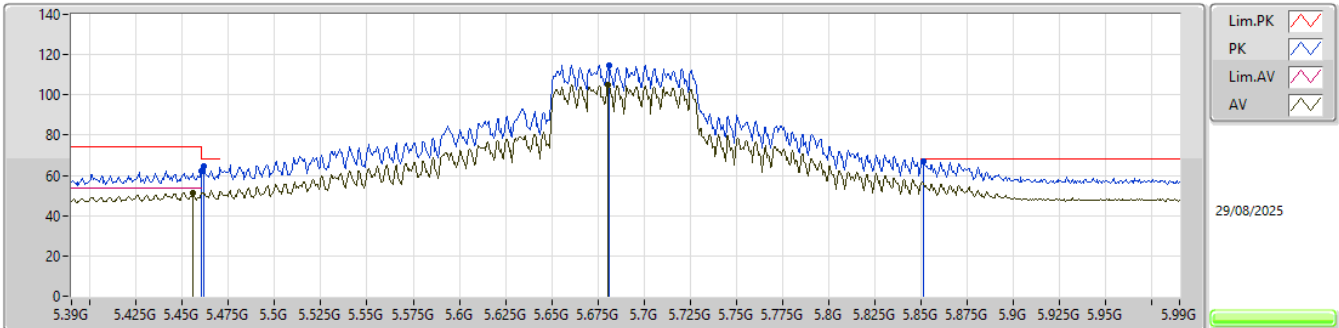


EUT_Y_4TX
SET 78
80\79\78
-0.04\ -0.36\1.19

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.46G	62.45	74.00	-11.55	56.26	3	Vertical	342	1.80	78	32.92	8.26	34.99
AV	5.456G	51.19	54.00	-2.81	45.02	3	Vertical	342	1.80	78	32.91	8.26	35.00
PK	5.4614G	64.56	68.20	-3.64	58.36	3	Vertical	342	1.80	78	32.92	8.27	34.99
PK	5.681G	114.94	Inf	-Inf	108.17	3	Vertical	342	1.80	78	33.25	8.41	34.89
AV	5.6804G	105.19	Inf	-Inf	98.43	3	Vertical	342	1.80	78	33.24	8.41	34.89
PK	5.8514G	67.01	68.20	-1.19	59.44	3	Vertical	342	1.80	78	33.91	8.47	34.81

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

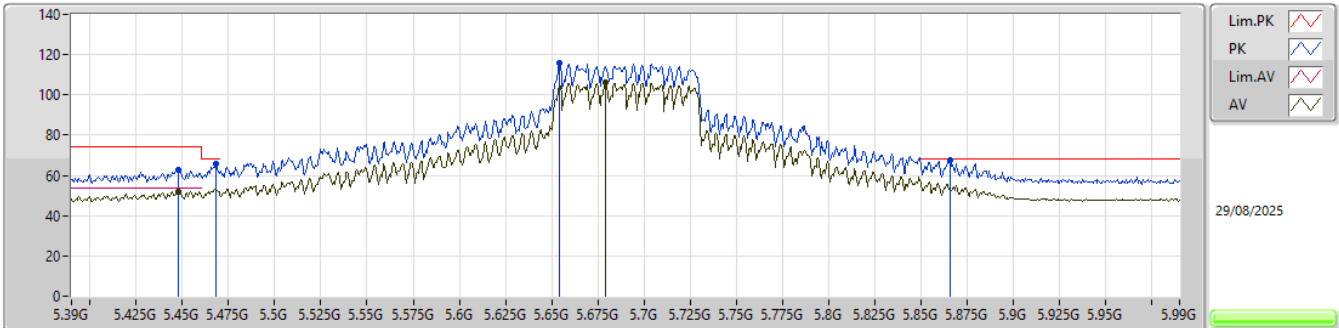


EUT_Y_4TX
SET 78
78
0.59

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4476G	62.96	74.00	-11.04	56.81	3	Horizontal	344	1.80	78	32.90	8.25	35.00
AV	5.4476G	51.72	54.00	-2.28	45.57	3	Horizontal	344	1.80	78	32.90	8.25	35.00
PK	5.468G	65.61	68.20	-2.59	59.39	3	Horizontal	344	1.80	78	32.94	8.27	34.99
PK	5.654G	115.77	Inf	-Inf	109.24	3	Horizontal	344	1.80	78	33.03	8.41	34.91
AV	5.6792G	106.06	Inf	-Inf	99.31	3	Horizontal	344	1.80	78	33.23	8.41	34.89
PK	5.8658G	67.61	68.20	-0.59	59.97	3	Horizontal	344	1.80	78	33.96	8.48	34.80

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5690MHz Straddle 5.47-5.725GHz_TX

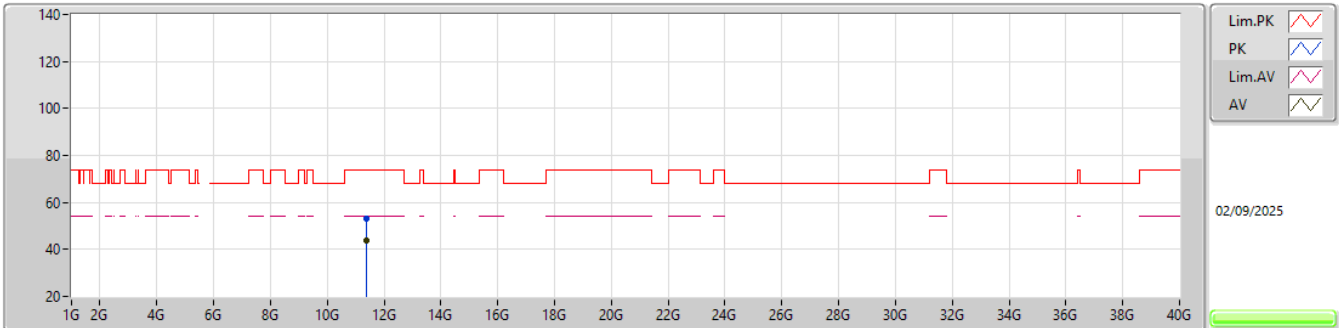EUT_Y_4TX
Setting 78
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.37634G	52.97	74.00	-21.03	68.27	3	Vertical	307	1.80	-	39.10	11.80	66.20			
AV	11.38144G	43.54	54.00	-10.46	58.84	3	Vertical	307	1.80	-	39.10	11.80	66.20			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

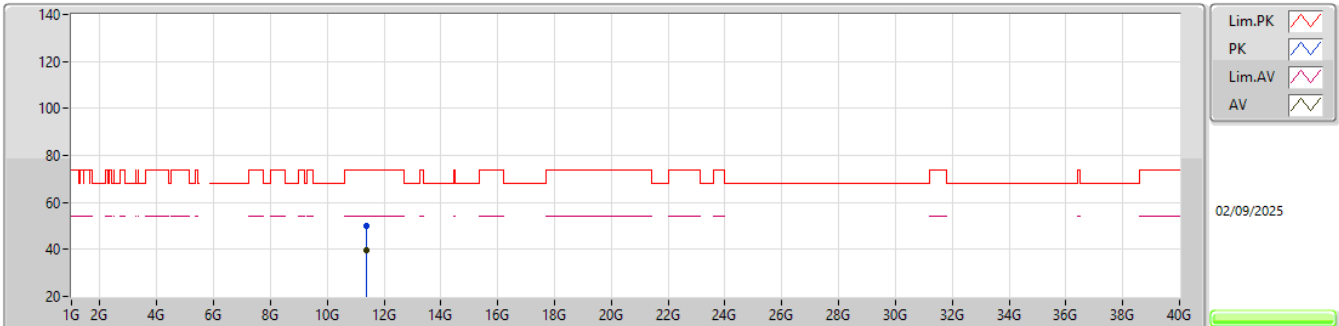


EUT_Y_4TX
Setting 78
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.38081G	50.02	74.00	-23.98	65.32	3	Horizontal	30	1.80	-	39.10	11.80	66.20			
AV	11.38597G	39.50	54.00	-14.50	54.80	3	Horizontal	30	1.80	-	39.10	11.80	66.20			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

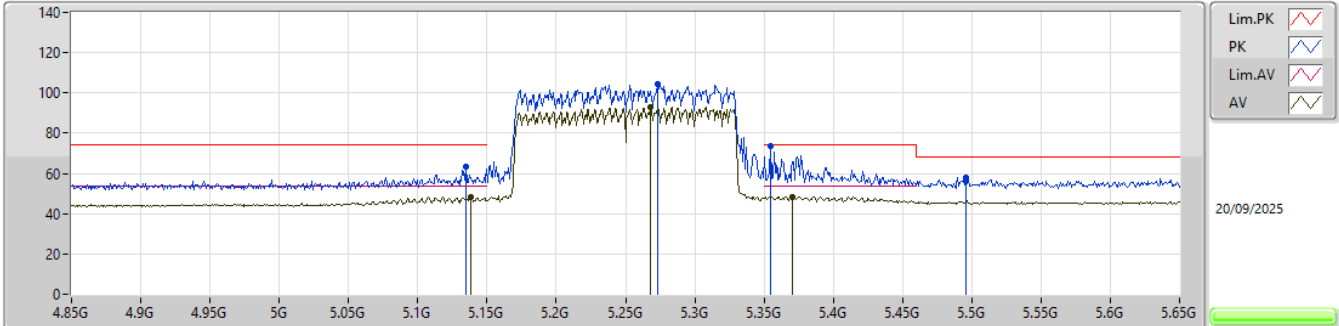


EUT_Y_4TX
SET 60
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1348G	63.33	74.00	-10.67	58.45	3	Vertical	340	1.80	-	31.84	6.76	33.72
AV	5.138G	48.17	54.00	-5.83	43.28	3	Vertical	340	1.80	-	31.85	6.76	33.72
PK	5.2732G	104.40	Inf	-Inf	100.04	3	Vertical	340	1.80	-	31.25	6.86	33.75
AV	5.2684G	92.96	Inf	-Inf	88.59	3	Vertical	340	1.80	-	31.26	6.86	33.75
PK	5.3548G	73.76	74.00	-0.24	69.35	3	Vertical	340	1.80	-	31.31	6.87	33.77
AV	5.3708G	48.43	54.00	-5.57	43.99	3	Vertical	340	1.80	-	31.34	6.88	33.78
PK	5.4956G	57.73	68.20	-10.47	52.97	3	Vertical	340	1.80	-	31.68	6.89	33.81

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

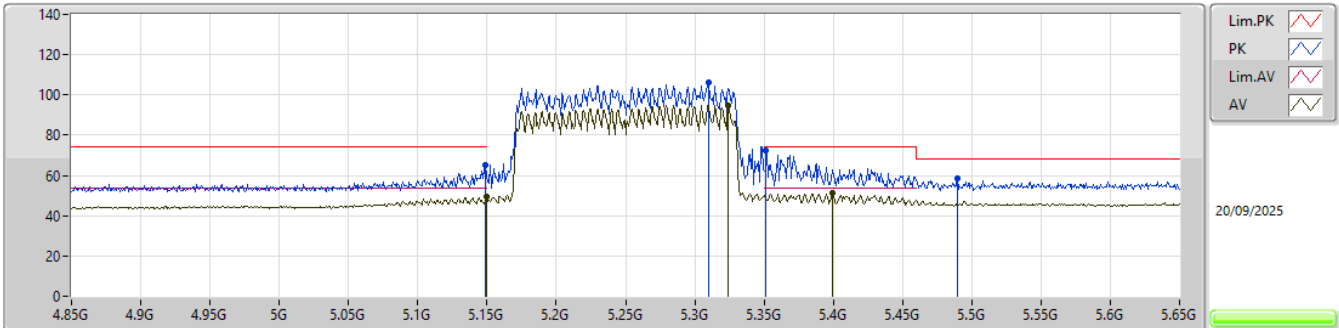


EUT_Y_4TX
SET 60
06-H-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1492G	65.43	74.00	-8.57	60.47	3	Horizontal	354	1.85	-	31.90	6.78	33.72					
AV	5.15G	49.21	54.00	-4.79	44.25	3	Horizontal	354	1.85	-	31.90	6.78	33.72					
PK	5.31G	106.11	Inf	-Inf	101.78	3	Horizontal	354	1.85	-	31.22	6.87	33.76					
AV	5.3244G	94.77	Inf	-Inf	90.41	3	Horizontal	354	1.85	-	31.25	6.87	33.76					
PK	5.3516G	72.65	74.00	-1.35	68.25	3	Horizontal	354	1.85	-	31.30	6.87	33.77					
AV	5.3996G	51.16	54.00	-2.84	46.66	3	Horizontal	354	1.85	-	31.40	6.88	33.78					
PK	5.49G	58.41	68.20	-9.79	53.67	3	Horizontal	354	1.85	-	31.66	6.89	33.81					

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

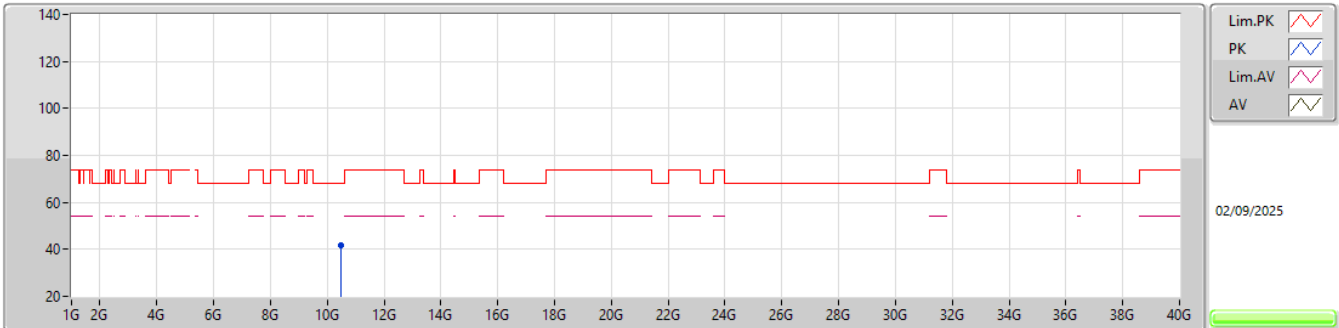


EUT_V_4TX
Setting 60
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49055G	41.98	68.20	-26.22	58.56	3	Vertical	133	2.34	-	38.82	11.33	66.73			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

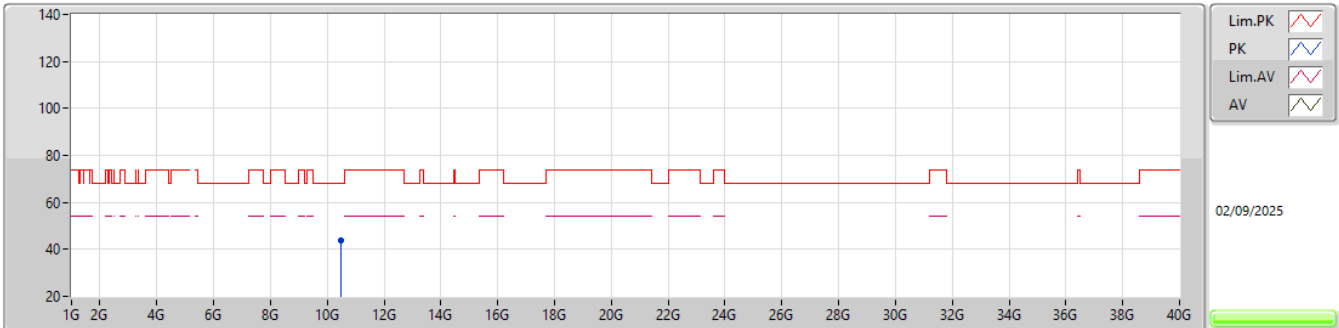


EUT_V_4TX
Setting 60
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4859G	43.90	68.20	-24.30	60.46	3	Horizontal	130	1.80	-	38.83	11.33	66.72			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

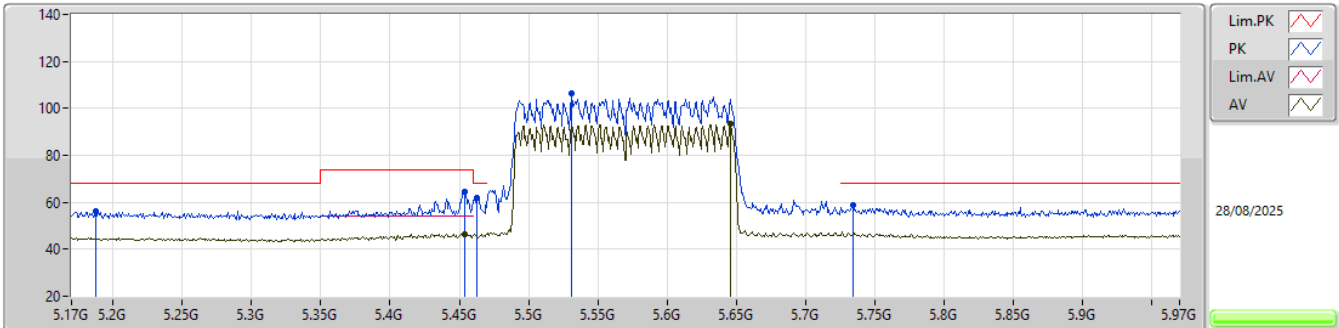


EUT_Y_4TX
Setting 54
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1876G	56.11	68.20	-12.09	51.34	3	Vertical	346	1.89	-	31.67	6.83	33.73			
PK	5.454G	64.33	74.00	-9.67	59.72	3	Vertical	346	1.89	-	31.52	6.89	33.80			
AV	5.454G	46.44	54.00	-7.56	41.83	3	Vertical	346	1.89	-	31.52	6.89	33.80			
PK	5.4628G	62.11	68.20	-6.09	57.47	3	Vertical	346	1.89	-	31.55	6.89	33.80			
PK	5.5308G	106.15	Inf	-Inf	101.36	3	Vertical	346	1.89	-	31.70	6.90	33.81			
PK	5.734G	58.56	68.20	-9.64	53.25	3	Vertical	346	1.89	-	32.00	7.09	33.78			
AV	5.646G	93.29	Inf	-Inf	88.42	3	Vertical	346	1.89	-	31.69	6.97	33.79			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

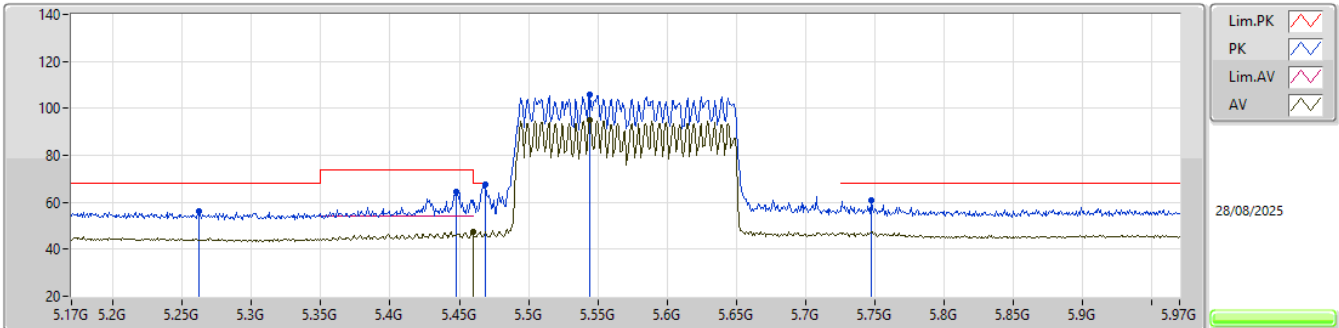


EUT_Y_4TX
Setting 54
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.262G	56.28	68.20	-11.92	51.89	3	Horizontal	354	1.89	-	31.28	6.86	33.75			
PK	5.4476G	64.44	74.00	-9.56	59.85	3	Horizontal	354	1.89	-	31.50	6.89	33.80			
PK	5.4684G	67.57	68.20	-0.63	62.91	3	Horizontal	354	1.89	-	31.57	6.89	33.80			
AV	5.4596G	47.36	54.00	-6.64	42.73	3	Horizontal	354	1.89	-	31.54	6.89	33.80			
PK	5.5444G	106.04	Inf	-Inf	101.24	3	Horizontal	354	1.89	-	31.70	6.90	33.80			
AV	5.5444G	94.75	Inf	-Inf	89.95	3	Horizontal	354	1.89	-	31.70	6.90	33.80			
PK	5.7476G	60.65	68.20	-7.55	55.32	3	Horizontal	354	1.89	-	32.00	7.11	33.78			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

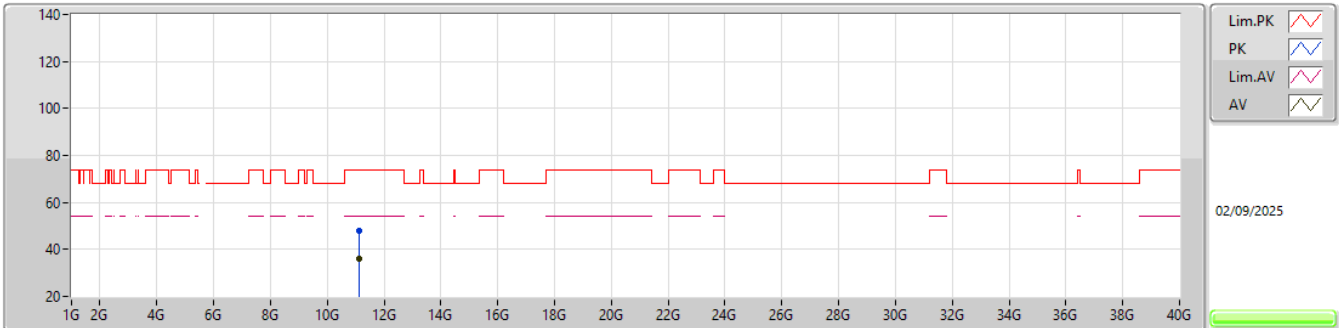


EUT_V_4TX
Setting 54
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.1256G	47.68	74.00	-26.32	63.15	3	Vertical	132	2.70	-	39.05	11.67	66.19			
AV	11.1415G	36.17	54.00	-17.83	51.67	3	Vertical	132	2.70	-	39.02	11.67	66.19			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

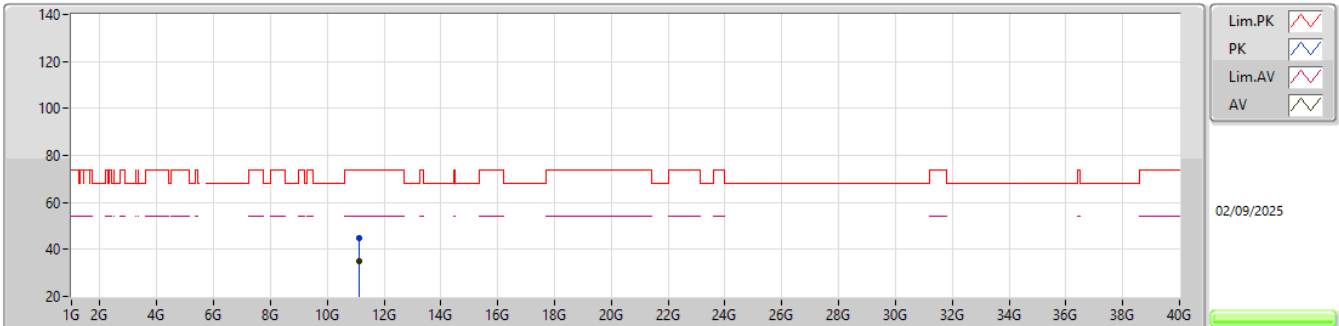


EUT_V_4TX
Setting 54
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.14249G	44.84	74.00	-29.16	60.33	3	Horizontal	161	2.55	-	39.02	11.68	66.19			
AV	11.14123G	34.81	54.00	-19.19	50.31	3	Horizontal	161	2.55	-	39.02	11.67	66.19			

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5260MHz_TX

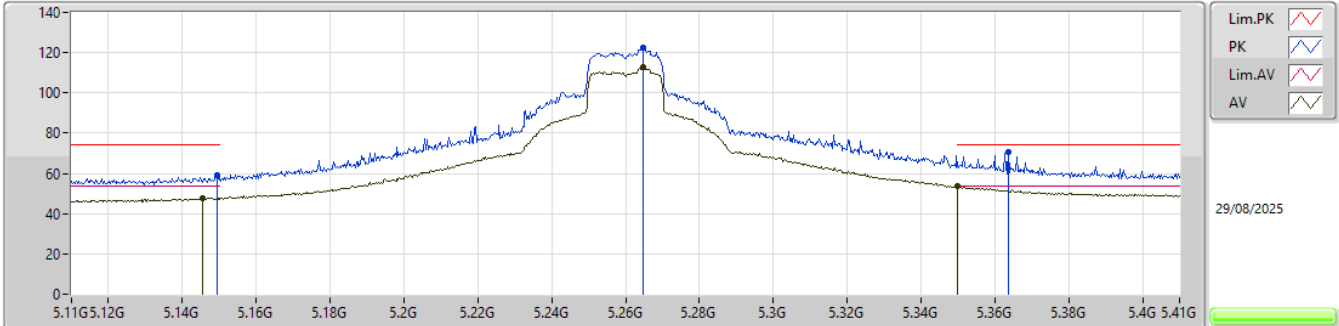


EUT_Y_4TX
SET 91
86\104\82\93\88\90\91
4.69\ -23.87\5.14\ -1.19\3.14\0.85\0.43

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1493G	59.36	74.00	-14.64	53.30	3	Vertical	346	1.80	91	33.10	8.07	35.11				
AV	5.1454G	47.78	54.00	-6.22	41.73	3	Vertical	346	1.80	91	33.09	8.07	35.11				
PK	5.2648G	122.44	Inf	-Inf	116.39	3	Vertical	346	1.80	91	32.97	8.14	35.06				
AV	5.2648G	112.76	Inf	-Inf	106.71	3	Vertical	346	1.80	91	32.97	8.14	35.06				
PK	5.3638G	70.43	74.00	-3.57	64.37	3	Vertical	346	1.80	91	32.90	8.19	35.03				
AV	5.35G	53.57	54.00	-0.43	47.52	3	Vertical	346	1.80	91	32.90	8.18	35.03				

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5260MHz_TX

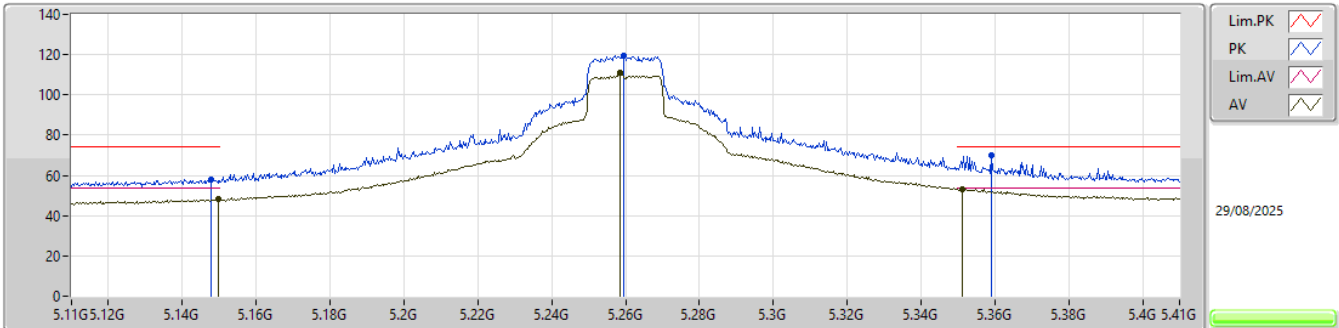


EUT_Y_4TX
SET 91
91
0.93

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1478G	57.76	74.00	-16.24	51.70	3	Horizontal	354	1.80	91	33.10	8.07	35.11			
AV	5.1499G	48.35	54.00	-5.65	42.29	3	Horizontal	354	1.80	91	33.10	8.07	35.11			
PK	5.2594G	119.62	Inf	-Inf	113.58	3	Horizontal	354	1.80	91	32.98	8.13	35.07			
AV	5.2585G	111.26	Inf	-Inf	105.22	3	Horizontal	354	1.80	91	32.98	8.13	35.07			
PK	5.359G	70.13	74.00	-3.87	64.07	3	Horizontal	354	1.80	91	32.90	8.19	35.03			
AV	5.3512G	53.07	54.00	-0.93	47.02	3	Horizontal	354	1.80	91	32.90	8.18	35.03			

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5260MHz_TX

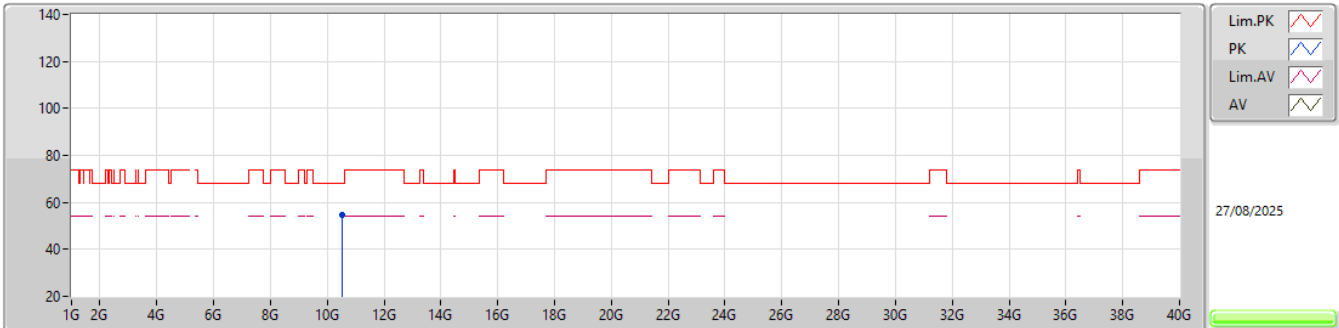


EUT_Y_4TX
Setting 91
05-R-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5182G	54.60	68.20	-13.60	49.98	3	Vertical	351	1.80	-	38.84	11.34	45.56			

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5260MHz_TX

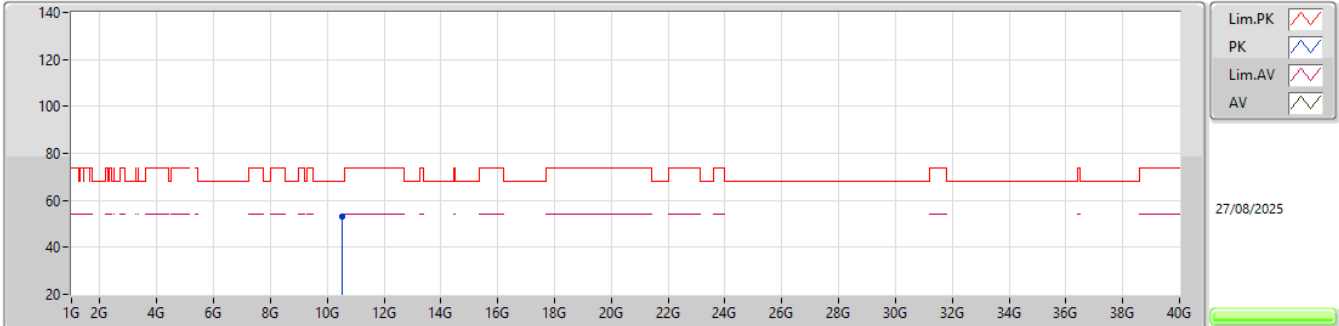


EUT Y_4TX
Setting 91
05-R-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.52885G	53.25	68.20	-14.95	48.61	3	Horizontal	325	1.80	-	38.86	11.35	45.57				

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5300MHz_TX

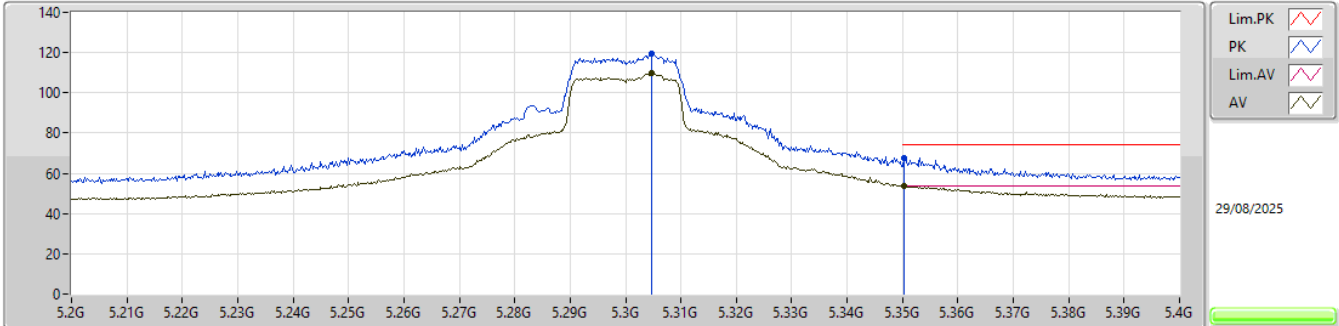


EUT_Y_4TX
SET 80
80
0.01

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3048G	119.41	Inf	-Inf	113.40	3	Vertical	345	1.80	80	32.90	8.16	35.05				
AV	5.3048G	109.75	Inf	-Inf	103.74	3	Vertical	345	1.80	80	32.90	8.16	35.05				
PK	5.3502G	67.50	74.00	-6.50	61.45	3	Vertical	345	1.80	80	32.90	8.18	35.03				
AV	5.3502G	53.99	54.00	-0.01	47.94	3	Vertical	345	1.80	80	32.90	8.18	35.03				

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5300MHz_TX

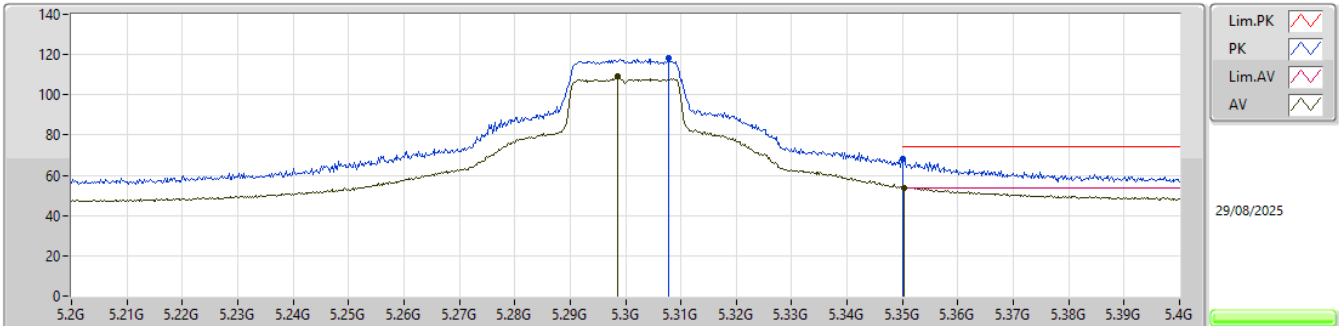


EUT Y_4TX
SET 80
80
0.01

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3078G	118.16	Inf	-Inf	112.15	3	Horizontal	351	1.80	80	32.90	8.16	35.05			
AV	5.2986G	109.35	Inf	-Inf	103.35	3	Horizontal	351	1.80	80	32.90	8.15	35.05			
PK	5.35G	68.17	74.00	-5.83	62.12	3	Horizontal	351	1.80	80	32.90	8.18	35.03			
AV	5.3502G	53.99	54.00	-0.01	47.94	3	Horizontal	351	1.80	80	32.90	8.18	35.03			

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5300MHz_TX

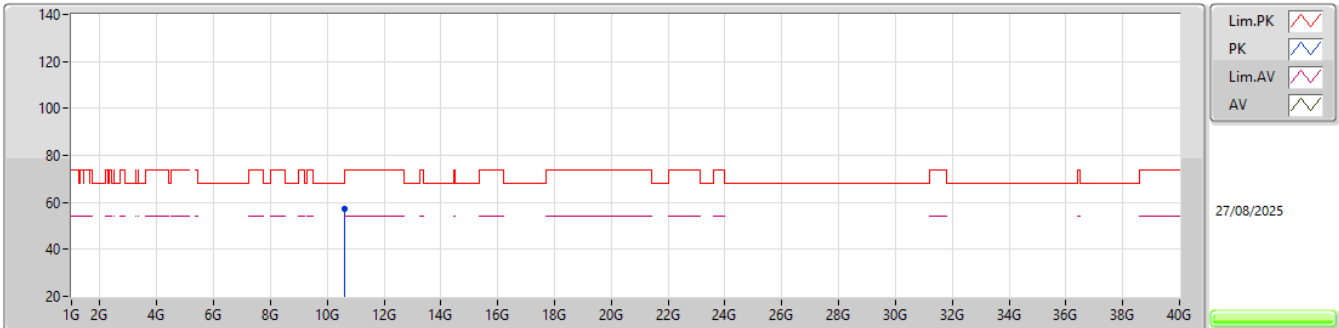


EUT_Y_4TX
Setting 80
05-R-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.59682G	57.43	68.20	-10.77	52.50	3	Vertical	26	1.80	-	39.18	11.39	45.64				

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5300MHz_TX

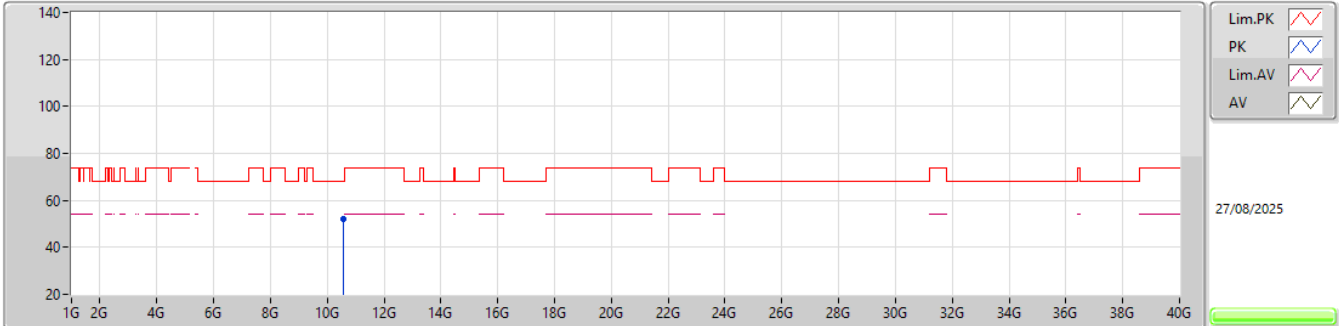


EUT Y_4TX
Setting 80
05-R-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.58638G	52.30	68.20	-15.90	47.43	3	Horizontal	325	1.80	-	39.12	11.38	45.63				

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5320MHz_TX

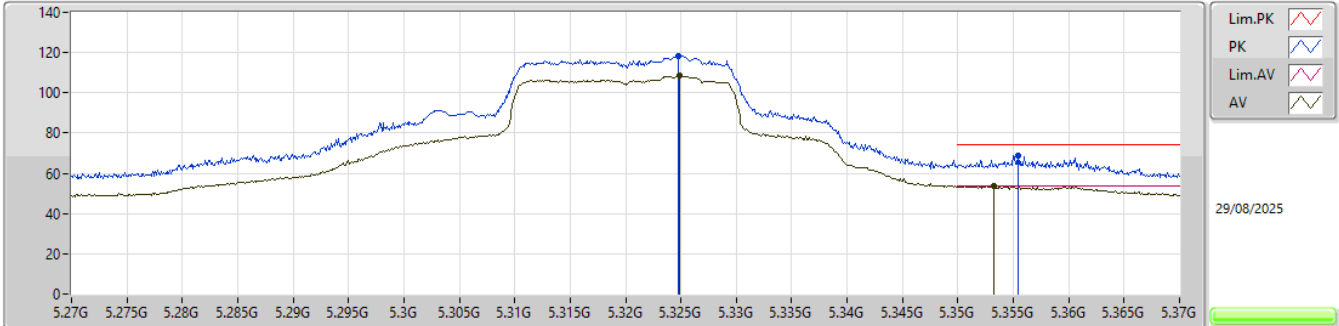


EUT_Y_4TX
SET 74
80\49\72\83\78\76\75\74
-7.67\5.90\2.42\11.05\5.16\4.13\1.42\0.06

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3248G	118.48	Inf	-Inf	112.45	3	Vertical	344	1.80	74	32.90	8.17	35.04			
AV	5.3249G	108.83	Inf	-Inf	102.80	3	Vertical	344	1.80	74	32.90	8.17	35.04			
PK	5.3554G	68.94	74.00	-5.06	62.88	3	Vertical	344	1.80	74	32.90	8.19	35.03			
AV	5.3532G	53.94	54.00	-0.06	47.89	3	Vertical	344	1.80	74	32.90	8.18	35.03			

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5320MHz_TX

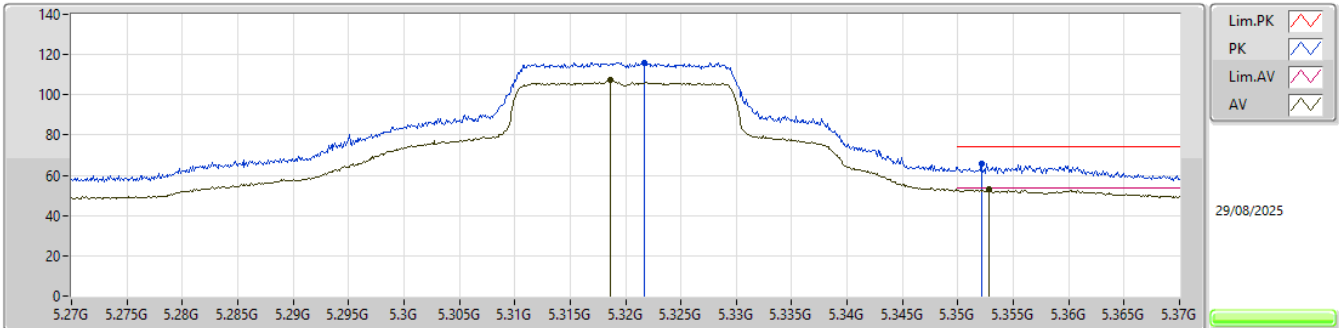


EUT Y_4TX
SET 73
74\73
-0.16\1.15

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3217G	116.00	Inf	-Inf	109.97	3	Horizontal	351	1.80	73	32.90	8.17	35.04			
AV	5.3186G	107.66	Inf	-Inf	101.64	3	Horizontal	351	1.80	73	32.90	8.17	35.05			
PK	5.3521G	65.81	74.00	-8.19	59.76	3	Horizontal	351	1.80	73	32.90	8.18	35.03			
AV	5.3528G	52.85	54.00	-1.15	46.80	3	Horizontal	351	1.80	73	32.90	8.18	35.03			

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5320MHz_TX

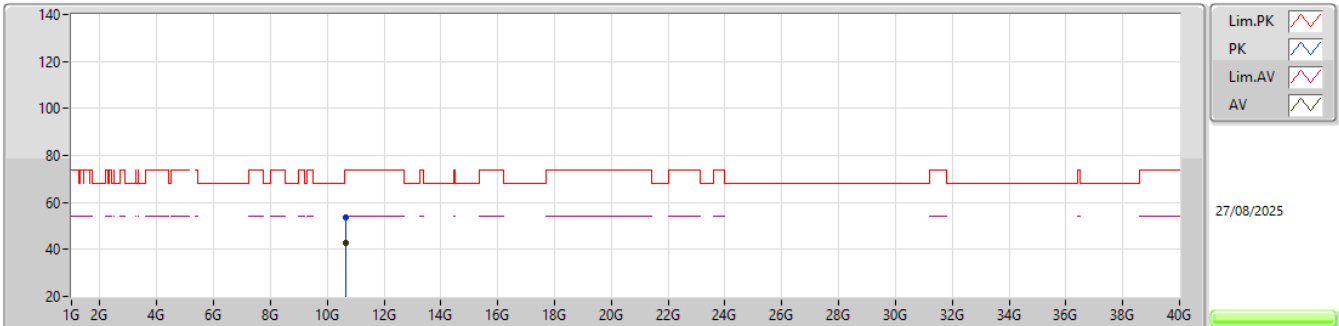


EUT Y_4TX
Setting 73
05-R-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63688G	53.64	74.00	-20.36	48.56	3	Vertical	45	1.80	-	39.35	11.41	45.68			
AV	10.63664G	42.55	54.00	-11.45	37.47	3	Vertical	45	1.80	-	39.35	11.41	45.68			

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5320MHz_TX

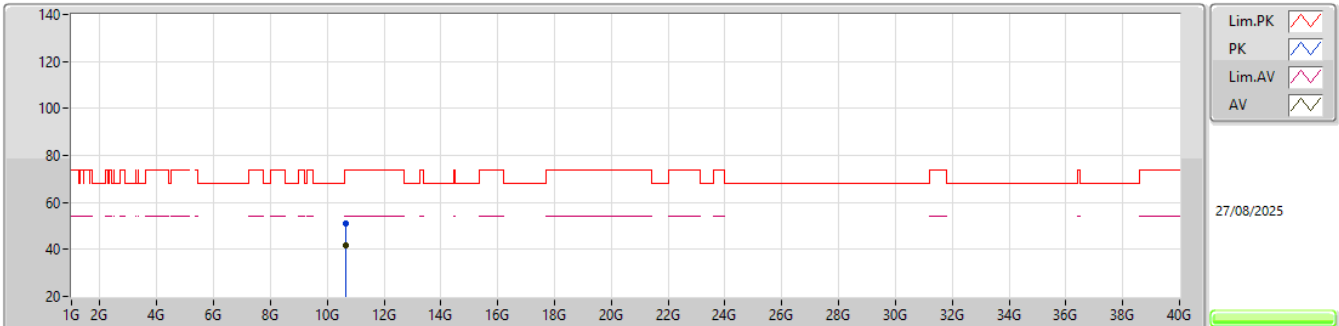


EUT_Y_4TX
Setting 73
05-R-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64711G	51.13	74.00	-22.87	46.02	3	Horizontal	306	1.80	-	39.39	11.41	45.69			
AV	10.63838G	41.96	54.00	-12.04	36.88	3	Horizontal	306	1.80	-	39.35	11.41	45.68			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5500MHz_TX

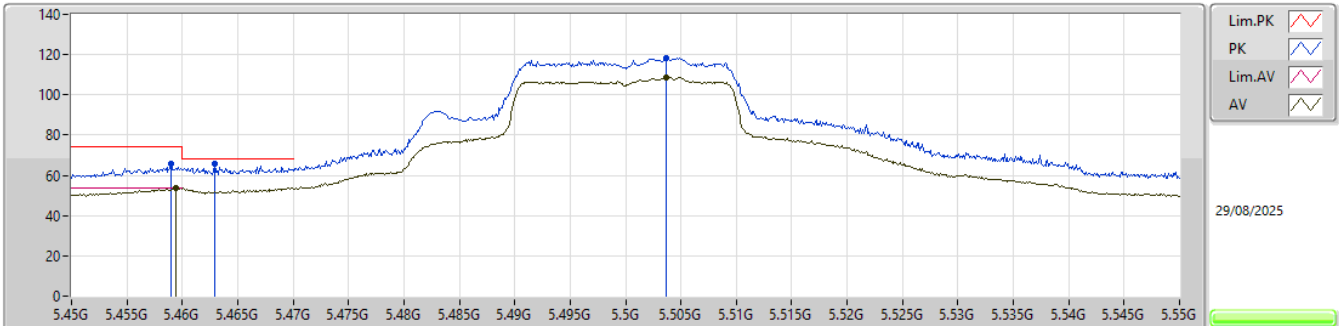


EUT_Y_4TX
SET 74
80\54\77\66\71\73\74
-6.36\5.81\ -3.43\3.90\2.48\1.29\0.31

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.459G	65.80	74.00	-8.20	59.61	3	Vertical	343	1.80	74	32.92	8.26	34.99			
AV	5.4594G	53.69	54.00	-0.31	47.50	3	Vertical	343	1.80	74	32.92	8.26	34.99			
PK	5.4629G	65.57	68.20	-2.63	59.36	3	Vertical	343	1.80	74	32.93	8.27	34.99			
PK	5.5037G	118.05	Inf	-Inf	111.73	3	Vertical	343	1.80	74	33.00	8.30	34.98			
AV	5.5037G	108.90	Inf	-Inf	102.58	3	Vertical	343	1.80	74	33.00	8.30	34.98			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5500MHz_TX

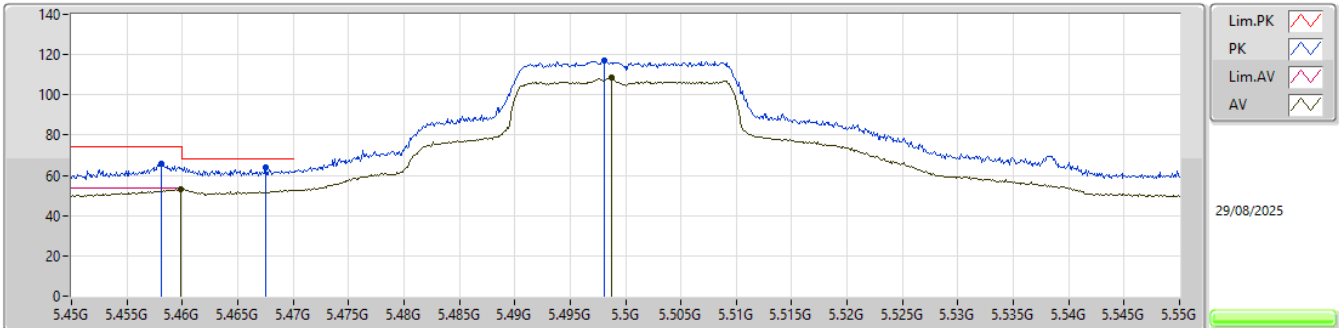


EUT Y_4TX
SET 73
74\73
-0.06\0.79

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4581G	65.77	74.00	-8.23	59.59	3	Horizontal	343	1.80	73	32.92	8.26	35.00			
AV	5.4599G	53.21	54.00	-0.79	47.02	3	Horizontal	343	1.80	73	32.92	8.26	34.99			
PK	5.4675G	63.88	68.20	-4.32	57.67	3	Horizontal	343	1.80	73	32.93	8.27	34.99			
PK	5.4981G	116.93	Inf	-Inf	110.61	3	Horizontal	343	1.80	73	33.00	8.30	34.98			
AV	5.4987G	108.70	Inf	-Inf	102.38	3	Horizontal	343	1.80	73	33.00	8.30	34.98			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX


5500MHz_TX

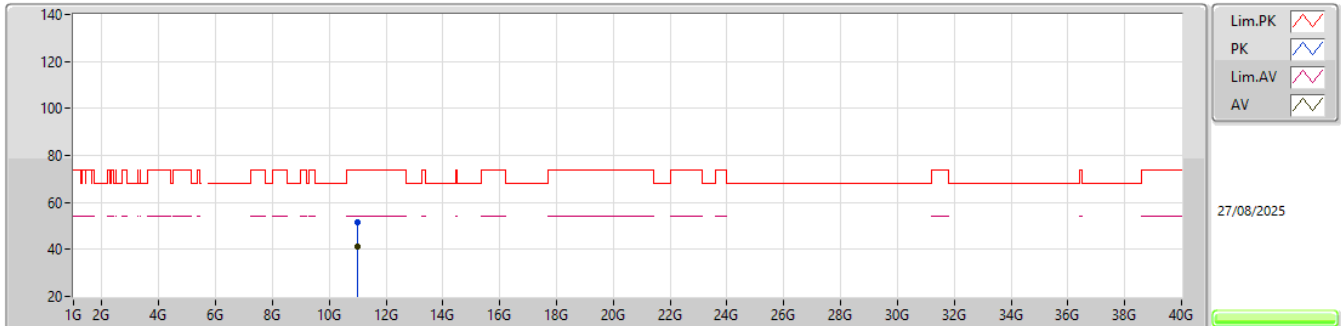EUT Y_4TX
Setting 73
05-R-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00732G	51.64	74.00	-22.36	47.16	3	Vertical	5	1.80	-	38.91	11.60	46.03			
AV	10.99328G	41.36	54.00	-12.64	36.88	3	Vertical	5	1.80	-	38.91	11.60	46.03			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5500MHz_TX

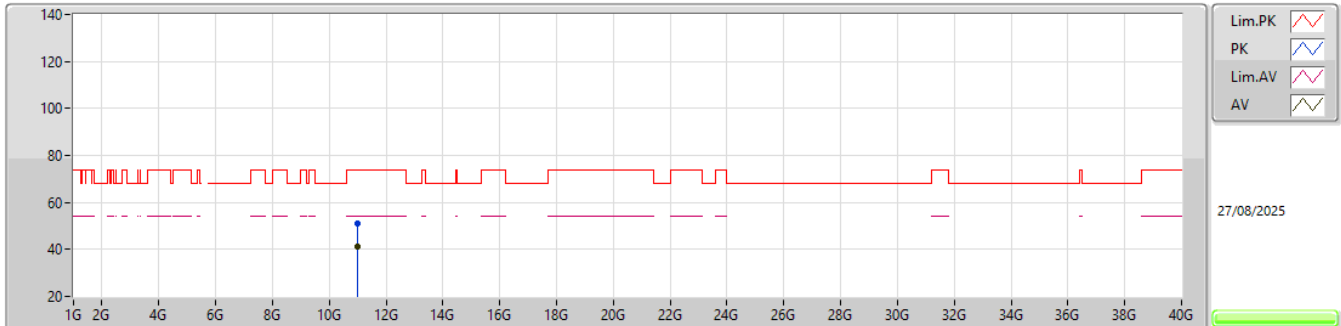


EUT_Y_4TX
Setting 73
05-R-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.98863G	50.95	74.00	-23.05	46.47	3	Horizontal	5	1.80	-	38.92	11.59	46.03			
AV	10.99337G	41.42	54.00	-12.58	36.94	3	Horizontal	5	1.80	-	38.91	11.60	46.03			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5580MHz_TX

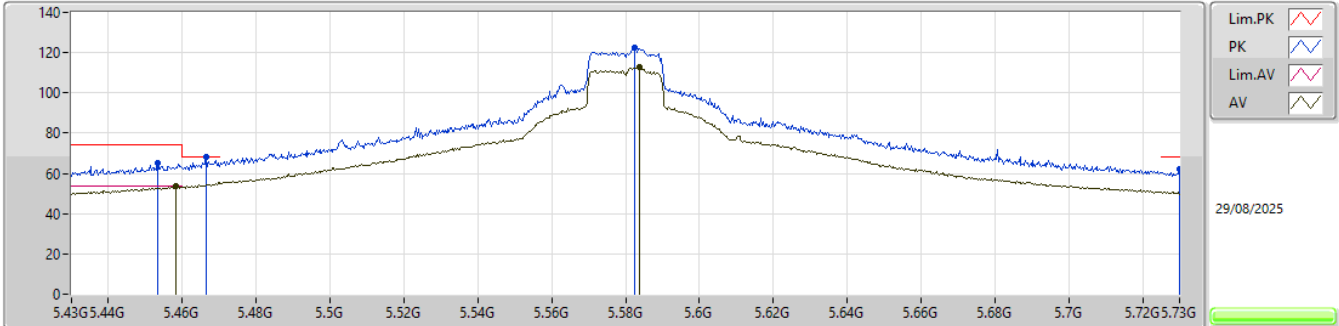


EUT_Y_4TX
SET 95
80\104\76\90\97\94\95
6.12\ -20.74\6.41\4.14\ -9.96\1.37\0.23

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4534G	65.28	74.00	-8.72	59.11	3	Vertical	343	1.80	95	32.91	8.26	35.00
AV	5.4582G	53.52	54.00	-0.48	47.34	3	Vertical	343	1.80	95	32.92	8.26	35.00
PK	5.4666G	67.97	68.20	-0.23	61.76	3	Vertical	343	1.80	95	32.93	8.27	34.99
PK	5.5824G	122.75	Inf	-Inf	116.38	3	Vertical	343	1.80	95	32.94	8.37	34.94
AV	5.5839G	112.75	Inf	-Inf	106.38	3	Vertical	343	1.80	95	32.93	8.38	34.94
PK	5.73G	62.34	68.20	-5.86	55.26	3	Vertical	343	1.80	95	33.52	8.43	34.87

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5580MHz_TX

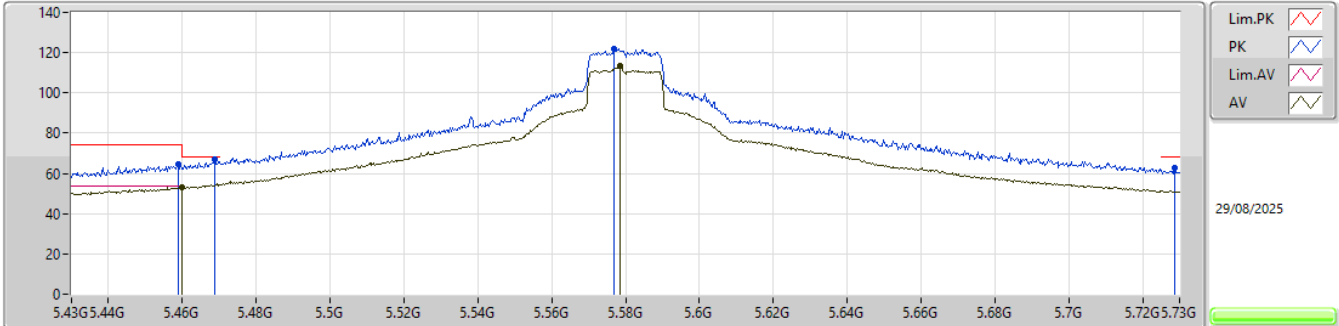


EUT_Y_4TX
SET 94
95\92\93\94
-0.73\2.22\1.83\0.87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4588G	64.69	74.00	-9.31	58.50	3	Horizontal	344	1.80	94	32.92	8.26	34.99			
AV	5.46G	53.13	54.00	-0.87	46.94	3	Horizontal	344	1.80	94	32.92	8.26	34.99			
PK	5.4687G	66.78	68.20	-1.42	60.56	3	Horizontal	344	1.80	94	32.94	8.27	34.99			
PK	5.577G	122.04	Inf	-Inf	115.66	3	Horizontal	344	1.80	94	32.95	8.37	34.94			
AV	5.5785G	113.33	Inf	-Inf	106.96	3	Horizontal	344	1.80	94	32.94	8.37	34.94			
PK	5.7288G	62.50	68.20	-5.70	55.42	3	Horizontal	344	1.80	94	33.52	8.43	34.87			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX


5580MHz_TX

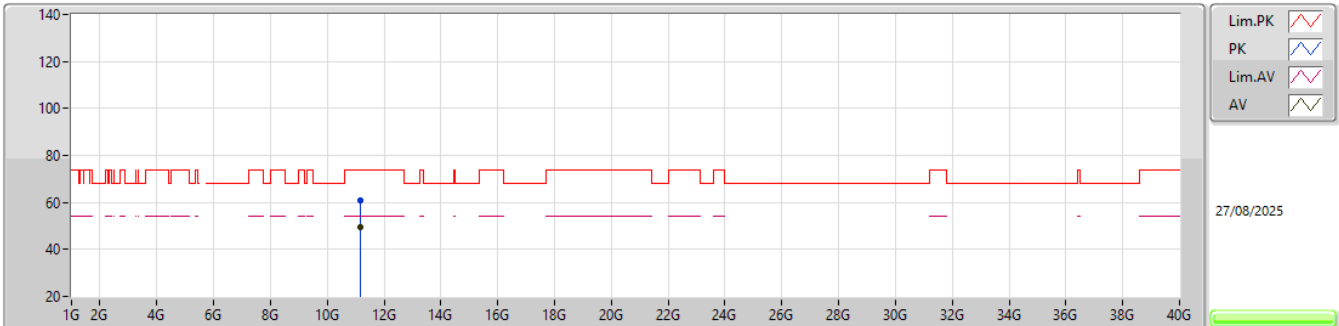EUT_Y_4TX
Setting 94
05-R-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.16117G	60.96	74.00	-13.04	56.05	3	Vertical	308	1.01	-	39.00	11.69	45.78			
AV	11.16108G	49.50	54.00	-4.50	44.59	3	Vertical	308	1.01	-	39.00	11.69	45.78			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5580MHz_TX

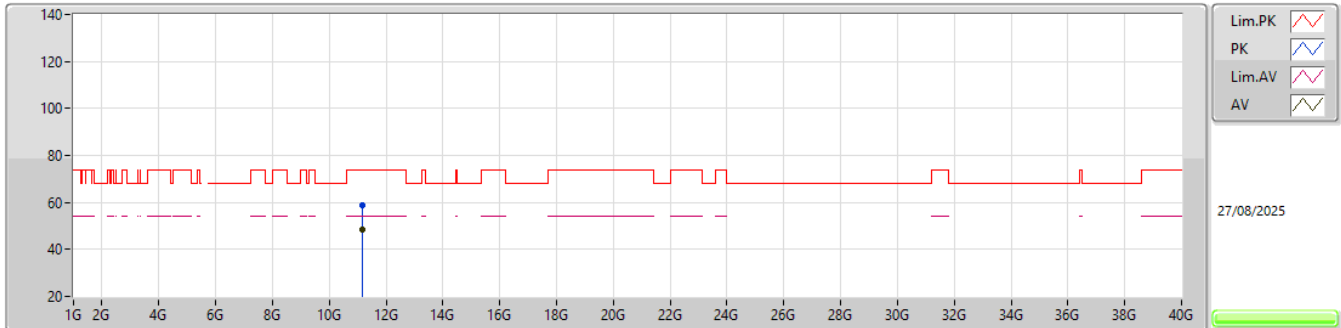


EUT_Y_4TX
Setting 94
05-R-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16723G	59.03	74.00	-14.97	54.11	3	Horizontal	313	1.80	-	39.00	11.69	45.77			
AV	11.1636G	48.39	54.00	-5.61	43.48	3	Horizontal	313	1.80	-	39.00	11.69	45.78			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5700MHz_TX

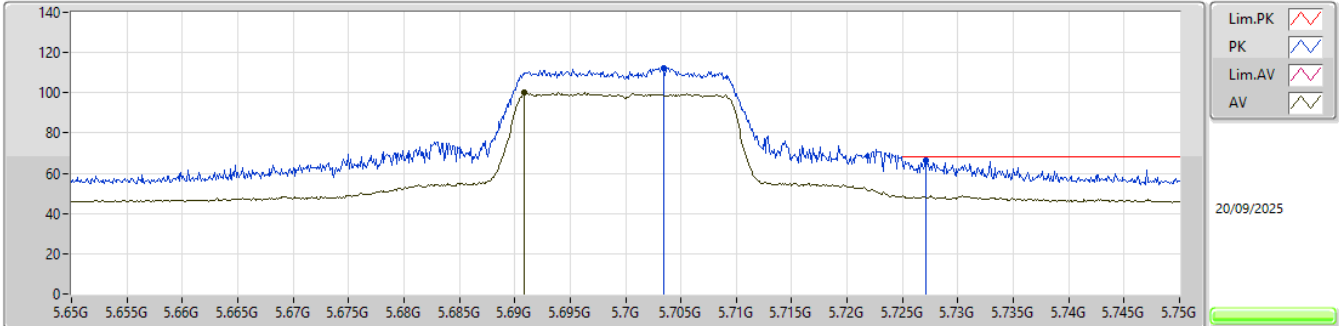


EUT_Y_4TX
SET 58
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7034G	112.48	Inf	-Inf	107.22	3	Vertical	348	1.80	-	32.00	7.05	33.79			
AV	5.6909G	100.24	Inf	-Inf	95.05	3	Vertical	348	1.80	-	31.95	7.03	33.79			
PK	5.7271G	66.16	68.20	-2.04	60.86	3	Vertical	348	1.80	-	32.00	7.08	33.78			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5700MHz_TX

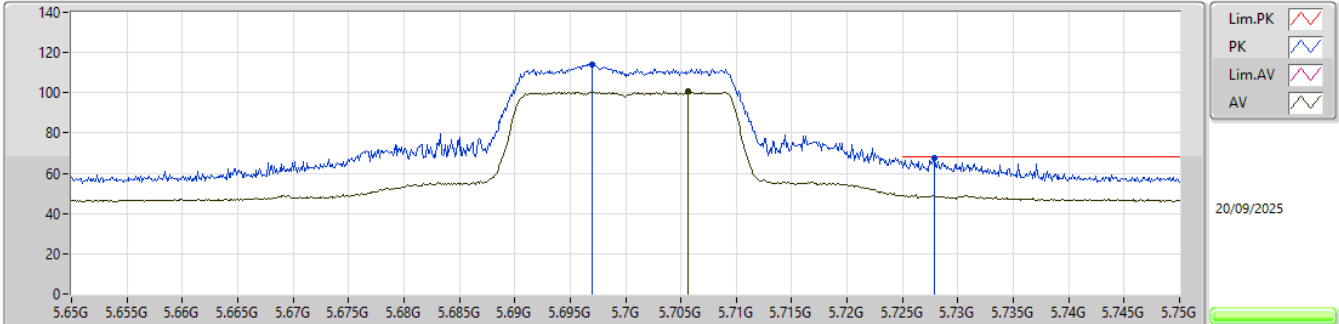


EUT_Y_4TX
SET 58
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.697G	113.90	Inf	-Inf	108.67	3	Horizontal	349	2.04	-	31.98	7.04	33.79			
AV	5.7056G	100.61	Inf	-Inf	95.35	3	Horizontal	349	2.04	-	32.00	7.05	33.79			
PK	5.7279G	67.52	68.20	-0.68	62.22	3	Horizontal	349	2.04	-	32.00	7.08	33.78			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5700MHz_TX

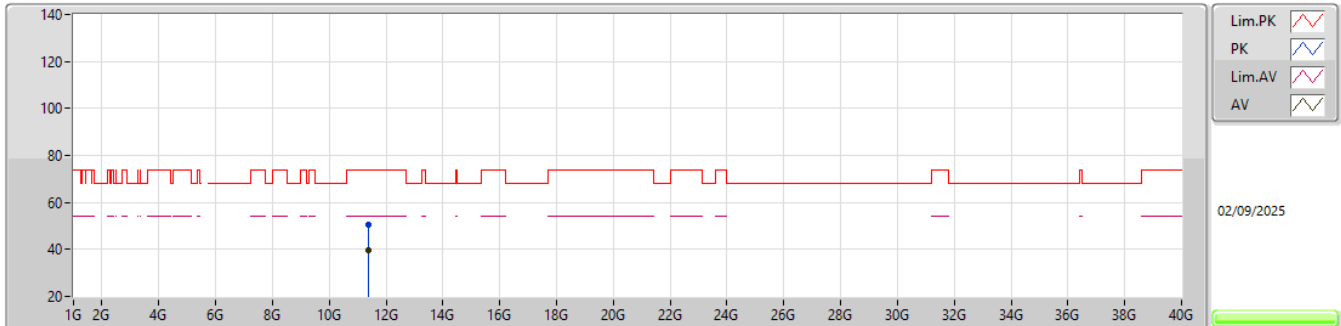


EUT_V_4TX
Setting 58
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.3967G	50.47	74.00	-23.53	44.97	3	Vertical	310	1.80	-	39.10	11.81	45.41			
AV	11.39628G	39.49	54.00	-14.51	33.99	3	Vertical	310	1.80	-	39.10	11.81	45.41			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX


5700MHz_TX

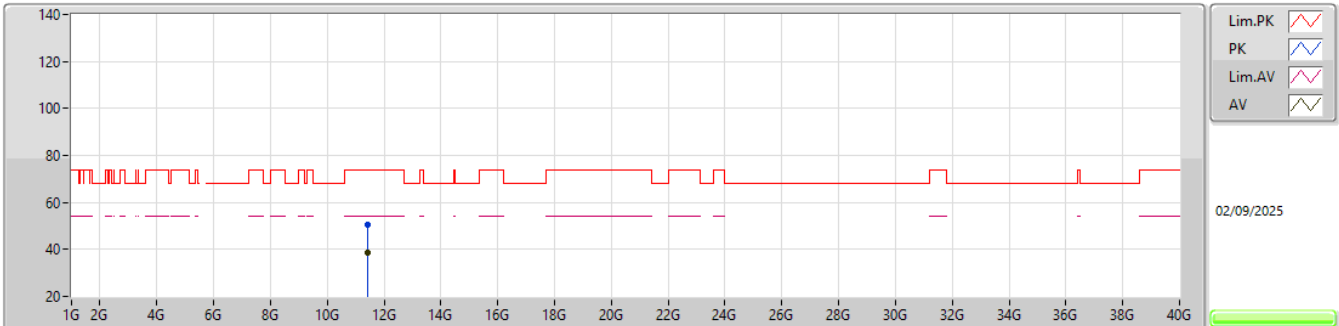EUT_Y_4TX
Setting 58
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.40194G	50.60	74.00	-23.40	45.09	3	Horizontal	33	1.80	-	39.10	11.81	45.40			
AV	11.40195G	38.49	54.00	-15.51	32.98	3	Horizontal	33	1.80	-	39.10	11.81	45.40			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

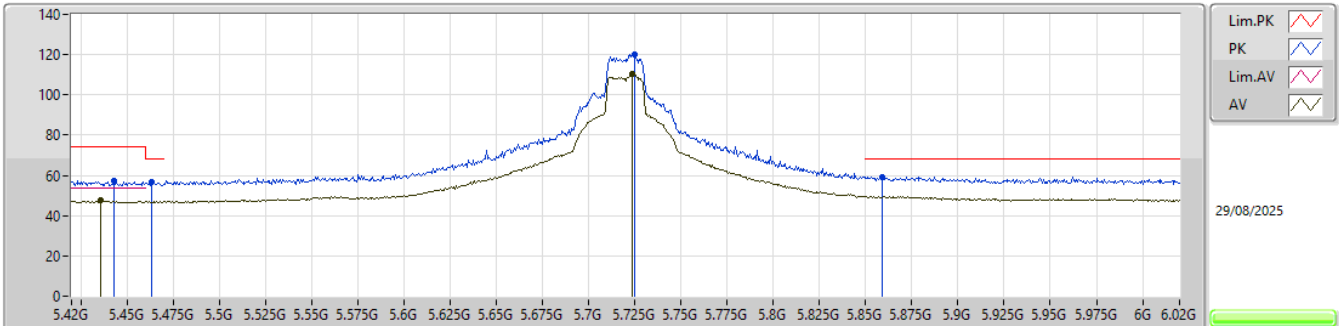

EUT_Y_4TX

SET 89


80\108\76\92\100\96\94\93\92\91\90\89

7.18\10.11\7.13\6.78\9.74\9.87\9.94\9.51\9.65\9.51\7.22\6.60

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4428G	57.38	74.00	-16.62	51.23	3	Vertical	333	1.80	89	32.90	8.25	35.00
AV	5.4356G	47.40	54.00	-6.60	41.26	3	Vertical	333	1.80	89	32.90	8.24	35.00
PK	5.4632G	56.70	68.20	-11.50	50.49	3	Vertical	333	1.80	89	32.93	8.27	34.99
PK	5.7248G	120.28	Inf	-Inf	113.22	3	Vertical	333	1.80	89	33.50	8.43	34.87
AV	5.7236G	110.71	Inf	-Inf	103.66	3	Vertical	333	1.80	89	33.49	8.43	34.87
PK	5.8592G	59.37	68.20	-8.83	51.76	3	Vertical	333	1.80	89	33.94	8.48	34.81

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

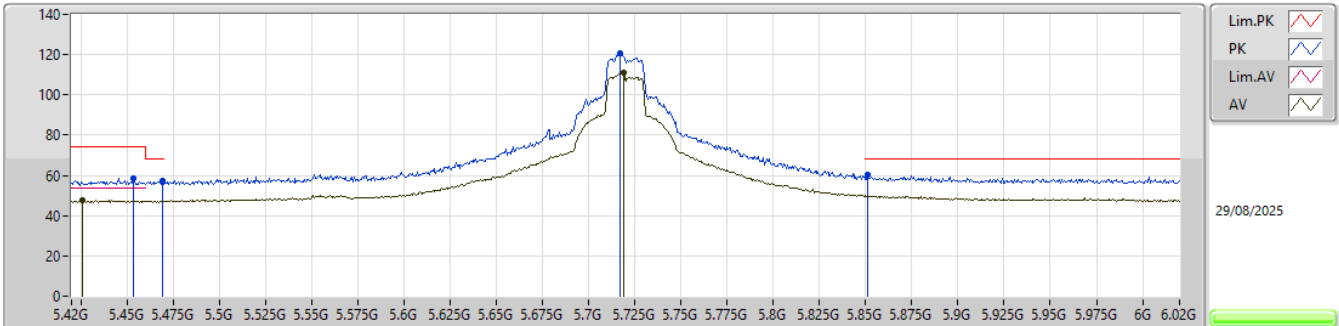


EUT_Y_4TX
SET 89
89
6.39

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4536G	58.53	74.00	-15.47	52.36	3	Horizontal	339	1.80	89	32.91	8.26	35.00			
AV	5.426G	47.61	54.00	-6.39	41.49	3	Horizontal	339	1.80	89	32.90	8.23	35.01			
PK	5.4692G	57.21	68.20	-10.99	50.99	3	Horizontal	339	1.80	89	32.94	8.27	34.99			
PK	5.717G	120.82	Inf	-Inf	113.80	3	Horizontal	339	1.80	89	33.47	8.43	34.88			
AV	5.7188G	111.10	Inf	-Inf	104.06	3	Horizontal	339	1.80	89	33.48	8.43	34.87			
PK	5.8508G	60.32	68.20	-7.88	52.76	3	Horizontal	339	1.80	89	33.90	8.47	34.81			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

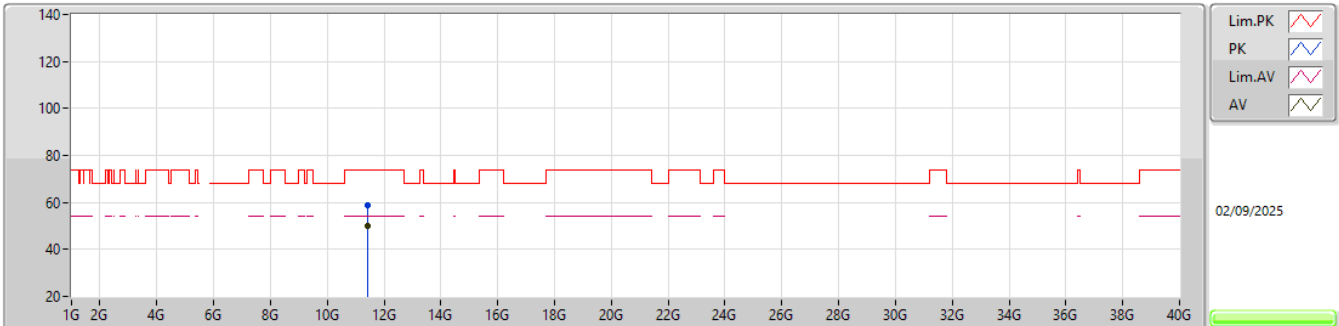EUT_Y_4TX
Setting 89
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43637G	58.95	74.00	-15.05	53.36	3	Vertical	316	1.34	-	39.10	11.83	45.34			
AV	11.43616G	49.82	54.00	-4.18	44.23	3	Vertical	316	1.34	-	39.10	11.83	45.34			

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

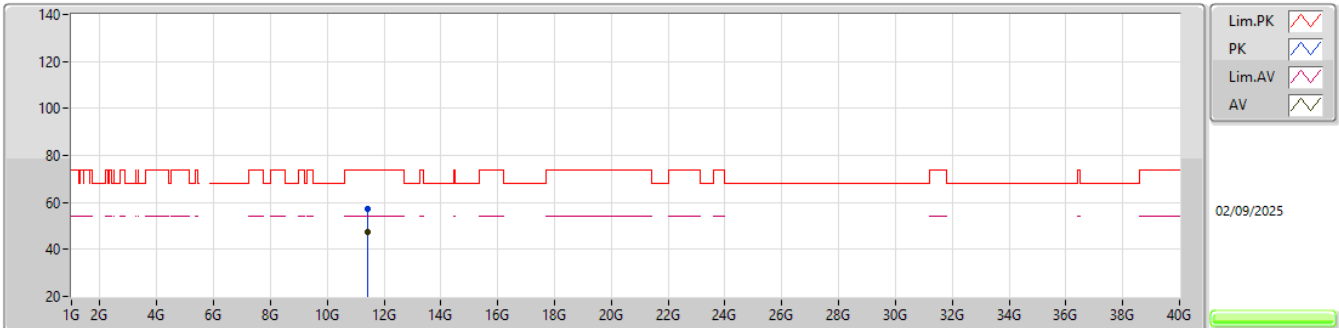EUT Y_4TX
Setting 89
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43591G	57.07	74.00	-16.93	51.48	3	Horizontal	35	1.80	-	39.10	11.83	45.34			
AV	11.43595G	47.62	54.00	-6.38	42.03	3	Horizontal	35	1.80	-	39.10	11.83	45.34			

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5270MHz_TX

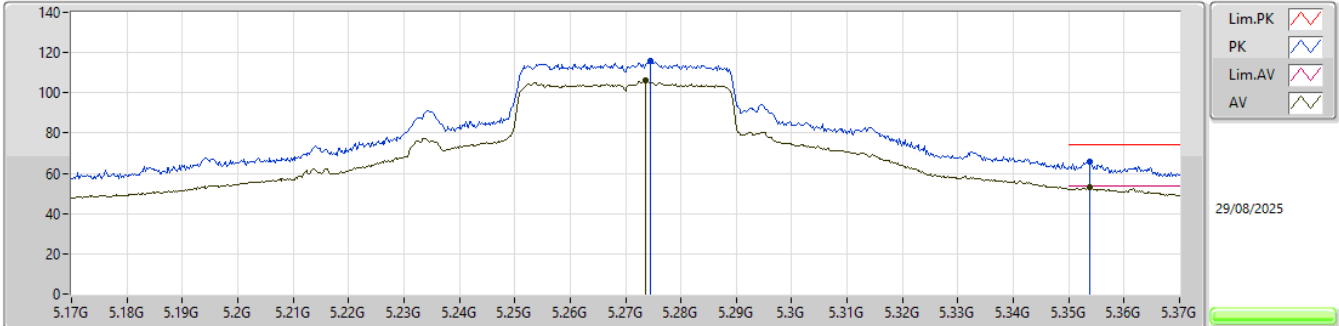


EUT_Y_4TX
SET 78
80\74\84\79\77\78
-1.32\4.35\ -7.12\ -0.07\2.74\0.77

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2744G	115.74	Inf	-Inf	109.71	3	Vertical	351	1.80	78	32.95	8.14	35.06				
AV	5.2736G	106.38	Inf	-Inf	100.35	3	Vertical	351	1.80	78	32.95	8.14	35.06				
PK	5.3538G	65.60	74.00	-8.40	59.55	3	Vertical	351	1.80	78	32.90	8.18	35.03				
AV	5.3538G	53.23	54.00	-0.77	47.18	3	Vertical	351	1.80	78	32.90	8.18	35.03				

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5270MHz_TX

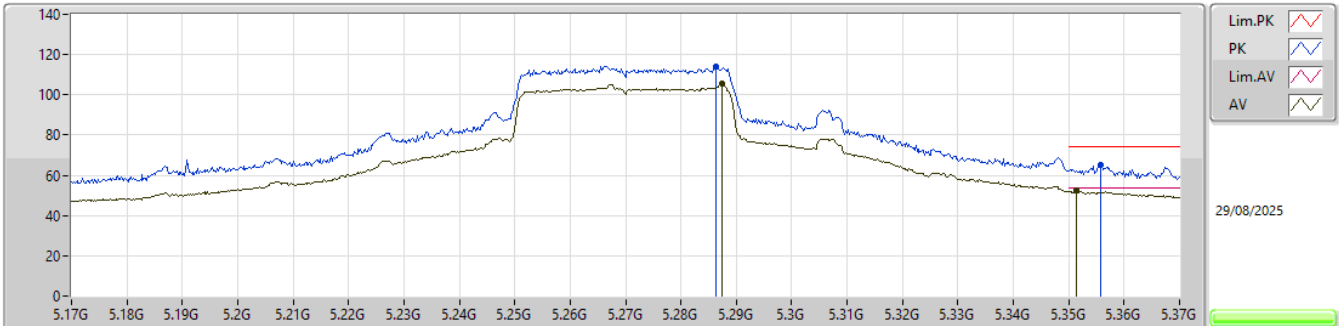


EUT Y_4TX
SET 78
78
1.71

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2864G	114.28	Inf	-Inf	108.26	3	Horizontal	353	3.00	78	32.93	8.15	35.06			
AV	5.2874G	105.32	Inf	-Inf	99.30	3	Horizontal	353	3.00	78	32.93	8.15	35.06			
PK	5.3558G	64.88	74.00	-9.12	58.82	3	Horizontal	353	3.00	78	32.90	8.19	35.03			
AV	5.3514G	52.29	54.00	-1.71	46.24	3	Horizontal	353	3.00	78	32.90	8.18	35.03			

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5270MHz_TX

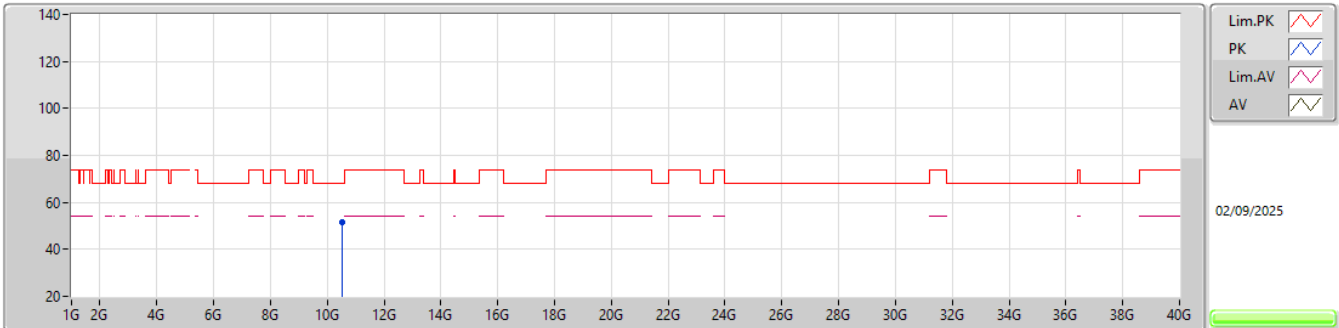


EUT_Y_4TX
Setting 78
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.54081G	51.53	68.20	-16.67	46.87	3	Vertical	351	1.80	-	38.88	11.36	45.58				

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5270MHz_TX

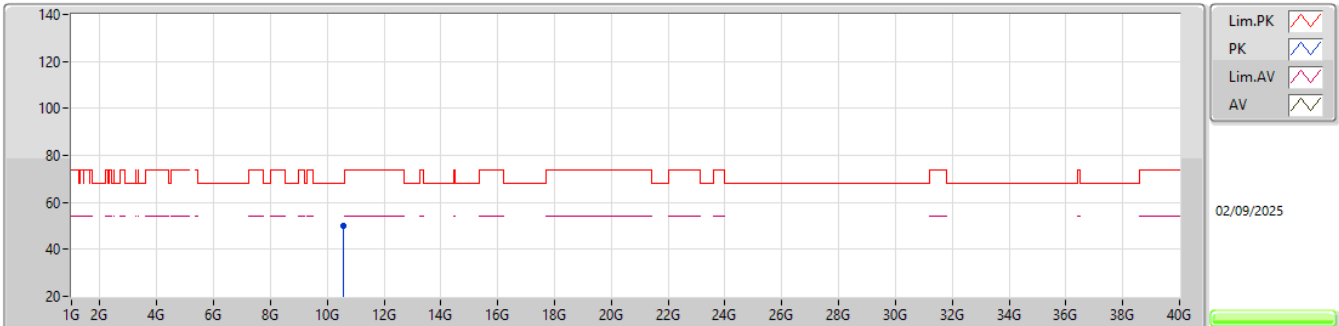


EUT_Y_4TX
Setting 78
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.55428G	49.99	68.20	-18.21	45.29	3	Horizontal	42	1.80	-	38.93	11.36	45.59				

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5310MHz_TX

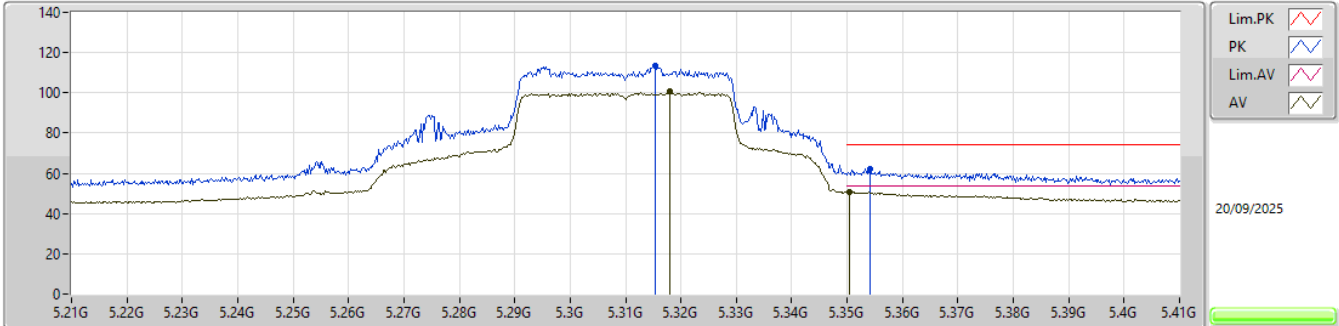


EUT_Y_4TX
SET 76
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3154G	113.27	Inf	-Inf	108.93	3	Vertical	343	1.60	-	31.23	6.87	33.76			
AV	5.318G	100.56	Inf	-Inf	96.21	3	Vertical	343	1.60	-	31.24	6.87	33.76			
PK	5.3542G	62.29	74.00	-11.71	57.88	3	Vertical	343	1.60	-	31.31	6.87	33.77			
AV	5.3504G	50.67	54.00	-3.33	46.27	3	Vertical	343	1.60	-	31.30	6.87	33.77			

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5310MHz_TX

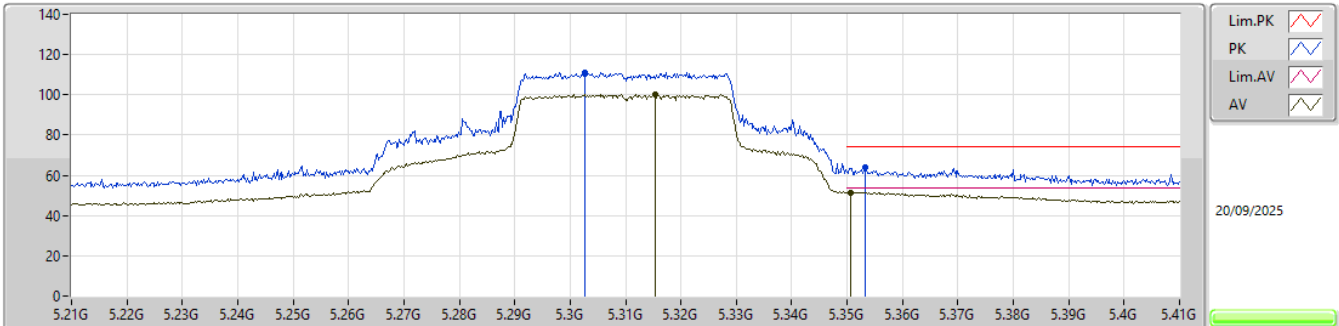


EUT_Y_4TX
SET 76
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3026G	111.17	Inf	-Inf	106.85	3	Horizontal	350	1.80	-	31.21	6.87	33.76			
AV	5.3154G	100.22	Inf	-Inf	95.88	3	Horizontal	350	1.80	-	31.23	6.87	33.76			
PK	5.3532G	63.75	74.00	-10.25	59.34	3	Horizontal	350	1.80	-	31.31	6.87	33.77			
AV	5.3506G	51.55	54.00	-2.45	47.15	3	Horizontal	350	1.80	-	31.30	6.87	33.77			

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5310MHz_TX

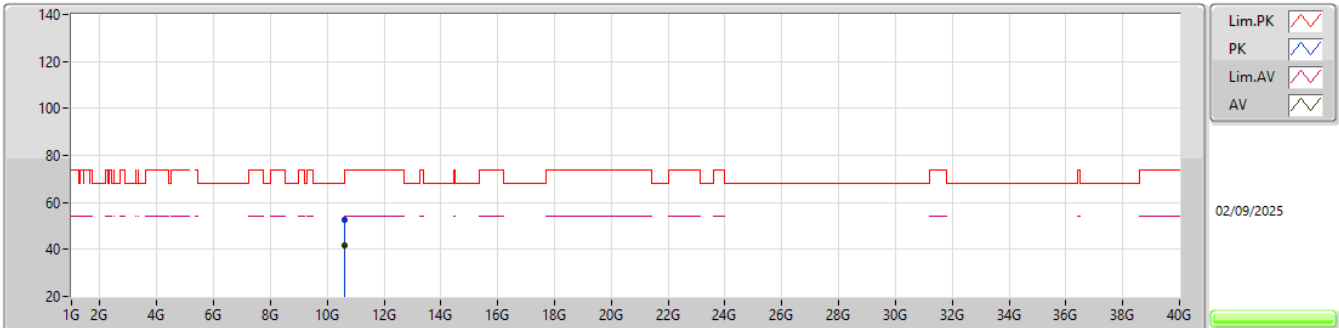


EUT_V_4TX
Setting 76
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.61868G	52.33	74.00	-21.67	47.32	3	Vertical	44	1.80	-	39.27	11.40	45.66			
AV	10.61826G	41.85	54.00	-12.15	36.84	3	Vertical	44	1.80	-	39.27	11.40	45.66			

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5310MHz_TX

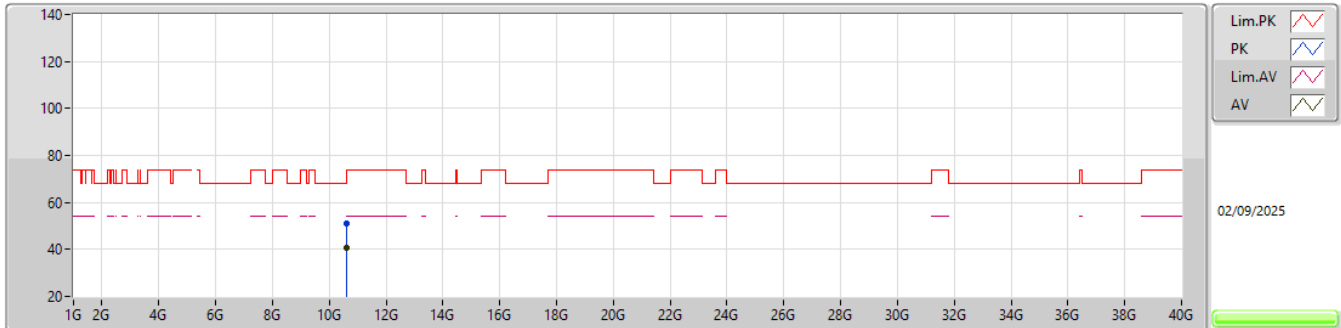


EUT_V_4TX
Setting 76
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.61841G	50.82	74.00	-23.18	45.81	3	Horizontal	325	1.80	-	39.27	11.40	45.66			
AV	10.61838G	40.76	54.00	-13.24	35.75	3	Horizontal	325	1.80	-	39.27	11.40	45.66			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5510MHz_TX

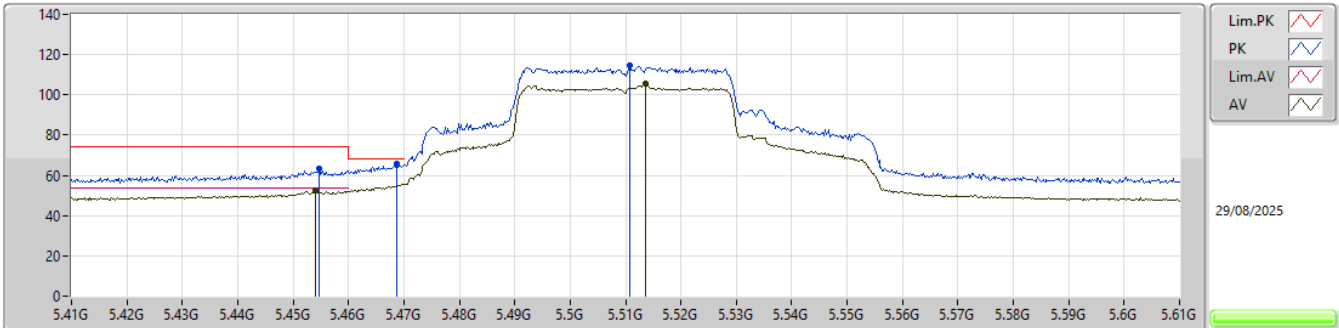


EUT_Y_4TX
SET 72
80\40\68\82\75\72\73\72
-13.16\7.11\3.62\ -15.69\ -3.30\1.78\ -0.37\1.59

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4546G	63.31	74.00	-10.69	57.14	3	Vertical	338	1.80	72	32.91	8.26	35.00			
AV	5.454G	52.41	54.00	-1.59	46.24	3	Vertical	338	1.80	72	32.91	8.26	35.00			
PK	5.4686G	65.61	68.20	-2.59	59.39	3	Vertical	338	1.80	72	32.94	8.27	34.99			
PK	5.5108G	114.46	Inf	-Inf	108.12	3	Vertical	338	1.80	72	33.00	8.31	34.97			
AV	5.5136G	105.34	Inf	-Inf	99.00	3	Vertical	338	1.80	72	33.00	8.31	34.97			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5510MHz_TX

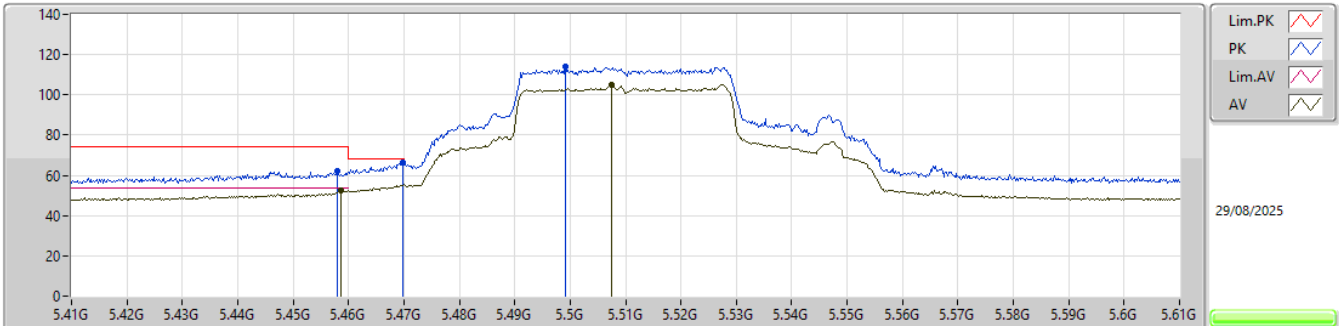


EUT_Y_4TX
SET 72
72
1.55

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.458G	62.03	74.00	-11.97	55.85	3	Horizontal	345	1.80	72	32.92	8.26	35.00			
AV	5.4586G	52.27	54.00	-1.73	46.08	3	Horizontal	345	1.80	72	32.92	8.26	34.99			
PK	5.4698G	66.65	68.20	-1.55	60.43	3	Horizontal	345	1.80	72	32.94	8.27	34.99			
PK	5.4992G	113.80	Inf	-Inf	107.48	3	Horizontal	345	1.80	72	33.00	8.30	34.98			
AV	5.5074G	105.16	Inf	-Inf	98.83	3	Horizontal	345	1.80	72	33.00	8.31	34.98			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5510MHz_TX

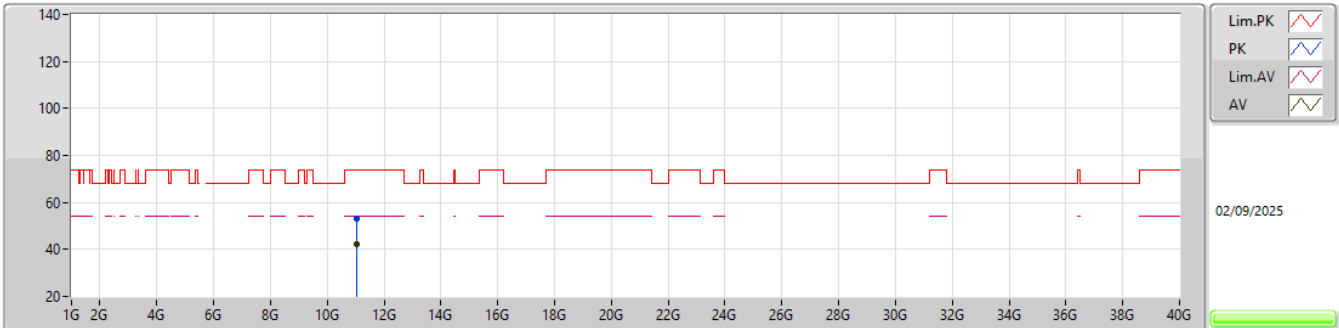


EUT Y_4TX
Setting 72
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.01723G	53.34	74.00	-20.66	48.81	3	Vertical	22	1.78	-	38.93	11.61	46.01			
AV	11.01721G	42.32	54.00	-11.68	37.79	3	Vertical	22	1.78	-	38.93	11.61	46.01			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5510MHz_TX

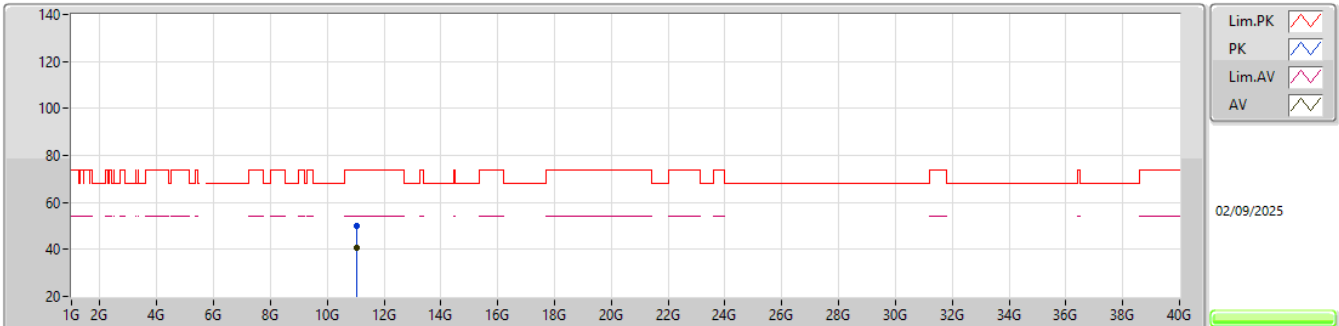


EUT Y_4TX
Setting 72
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01832G	50.22	74.00	-23.78	45.68	3	Horizontal	6	1.80	-	38.94	11.61	46.01			
AV	11.01835G	40.78	54.00	-13.22	36.24	3	Horizontal	6	1.80	-	38.94	11.61	46.01			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5550MHz_TX

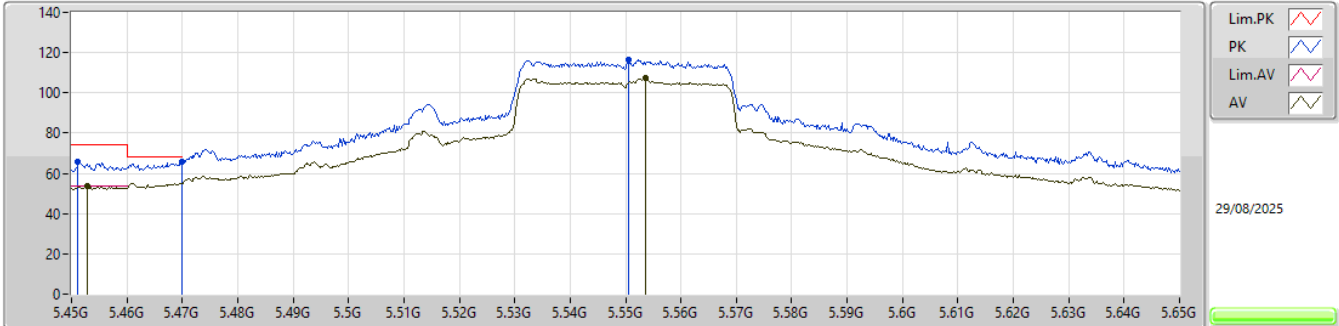


EUT_Y_4TX
SET 80
80
0.43

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4512G	65.70	74.00	-8.30	59.54	3	Vertical	339	1.80	80	32.90	8.26	35.00			
AV	5.4528G	53.57	54.00	-0.43	47.40	3	Vertical	339	1.80	80	32.91	8.26	35.00			
PK	5.47G	65.60	68.20	-2.60	59.38	3	Vertical	339	1.80	80	32.94	8.27	34.99			
PK	5.5506G	116.22	Inf	-Inf	109.83	3	Vertical	339	1.80	80	33.00	8.35	34.96			
AV	5.5536G	107.35	Inf	-Inf	100.96	3	Vertical	339	1.80	80	32.99	8.35	34.95			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5550MHz_TX

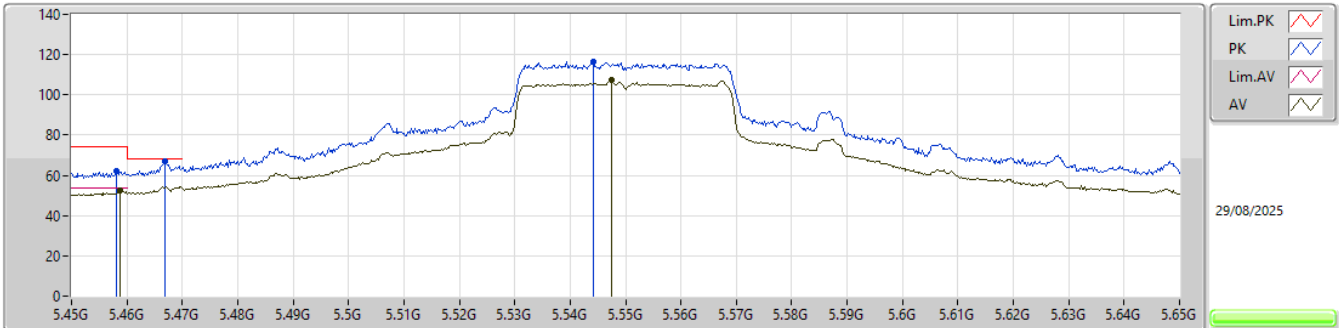


EUT_Y_4TX
SET 78
80\69\79\74\76\77\78
-2.57\5.68\ -0.55\4.75\3.42\2.70\0.92

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4582G	61.88	74.00	-12.12	55.70	3	Horizontal	347	1.80	78	32.92	8.26	35.00			
AV	5.4588G	52.36	54.00	-1.64	46.17	3	Horizontal	347	1.80	78	32.92	8.26	34.99			
PK	5.4668G	67.28	68.20	-0.92	61.07	3	Horizontal	347	1.80	78	32.93	8.27	34.99			
PK	5.5442G	116.27	Inf	-Inf	109.89	3	Horizontal	347	1.80	78	33.00	8.34	34.96			
AV	5.5474G	107.37	Inf	-Inf	100.99	3	Horizontal	347	1.80	78	33.00	8.34	34.96			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5550MHz_TX

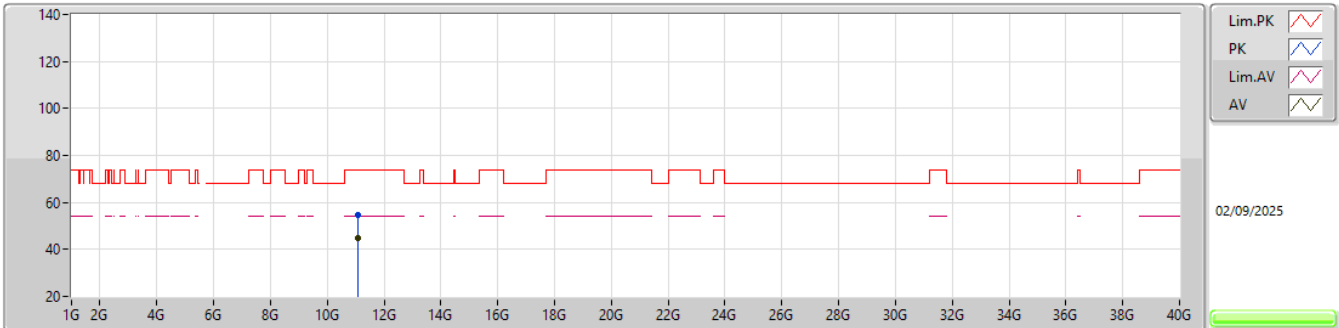


EUT_Y_4TX
Setting 78
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.09712G	54.85	74.00	-19.15	49.99	3	Vertical	312	1.79	-	39.09	11.65	45.88			
AV	11.09652G	44.61	54.00	-9.39	39.76	3	Vertical	312	1.79	-	39.09	11.65	45.89			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5550MHz_TX

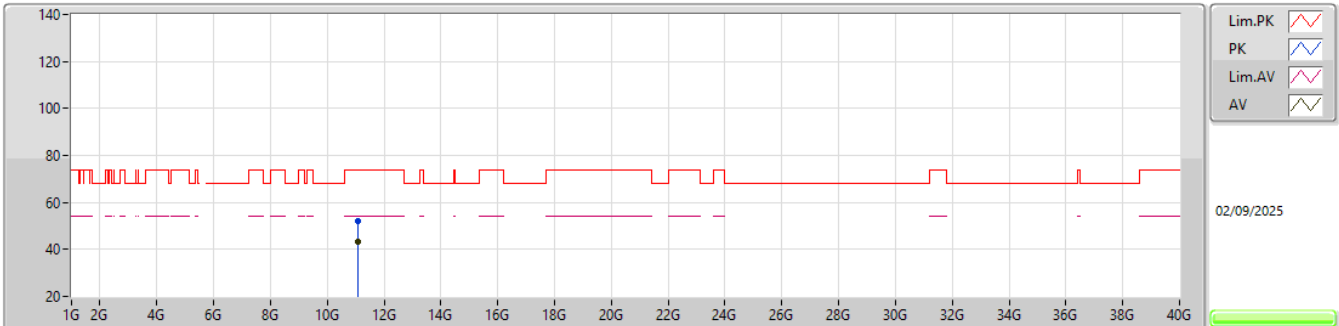


EUT_Y_4TX
Setting 78
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.08737G	52.14	74.00	-21.86	47.32	3	Horizontal	0	0.00	-	39.07	11.65	45.90			
AV	11.09835G	43.04	54.00	-10.96	38.17	3	Horizontal	0	0.00	-	39.10	11.65	45.88			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5670MHz_TX

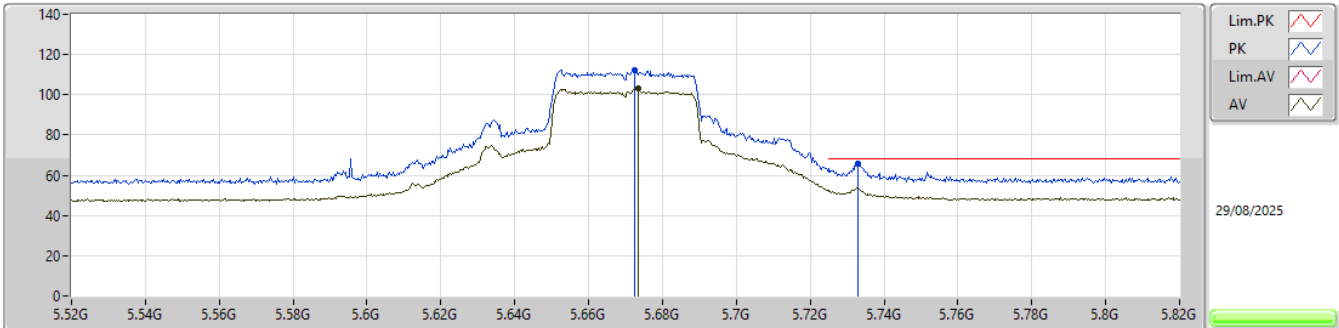


EUT_Y_4TX
SET 68
80\59\79\69\64\66\67\68
-5.02\5.11\4.49\0.96\3.36\3.44\2.88\2.63

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6724G	112.40	Inf	-Inf	105.71	3	Vertical	339	1.80	68	33.18	8.41	34.90			
AV	5.6736G	103.08	Inf	-Inf	96.38	3	Vertical	339	1.80	68	33.19	8.41	34.90			
PK	5.733G	65.57	68.20	-2.63	58.48	3	Vertical	339	1.80	68	33.53	8.43	34.87			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX


5670MHz_TX

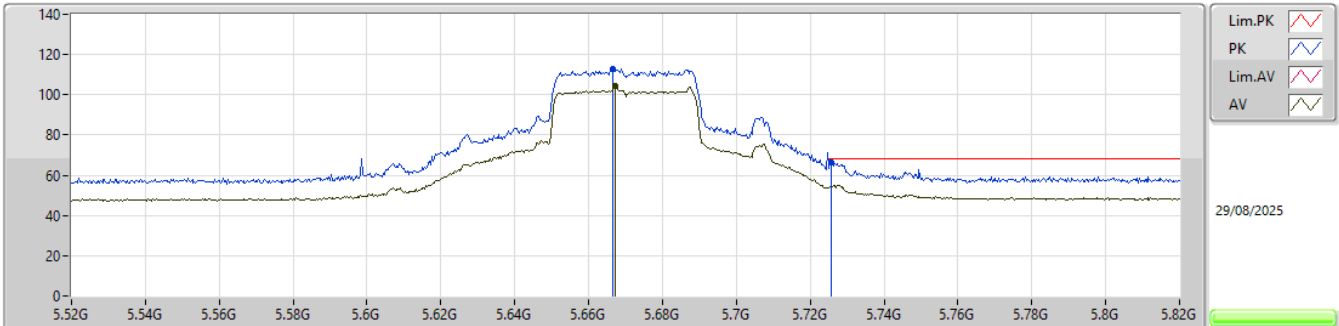EUT Y_4TX
SET 68
68
1.98

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.664G	112.65	Inf	-Inf	106.01	3	Horizontal	338	1.80	68	33.13	8.41	34.90			
AV	5.6673G	104.21	Inf	-Inf	97.56	3	Horizontal	338	1.80	68	33.14	8.41	34.90			
PK	5.7258G	66.22	68.20	-1.98	59.16	3	Horizontal	338	1.80	68	33.50	8.43	34.87			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX


5670MHz_TX

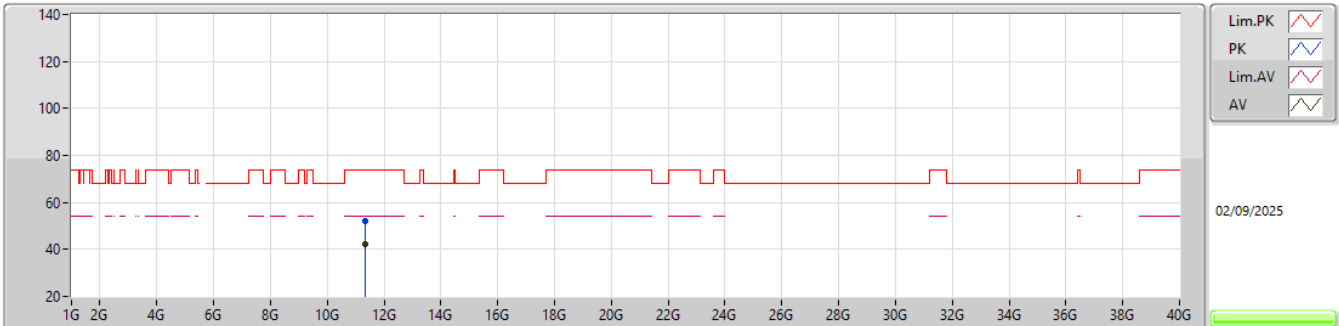EUT Y_4TX
Setting 68
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.34477G	52.30	74.00	-21.70	46.91	3	Vertical	307	1.35	-	39.10	11.78	45.49			
AV	11.34477G	42.32	54.00	-11.68	36.93	3	Vertical	307	1.35	-	39.10	11.78	45.49			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5670MHz_TX

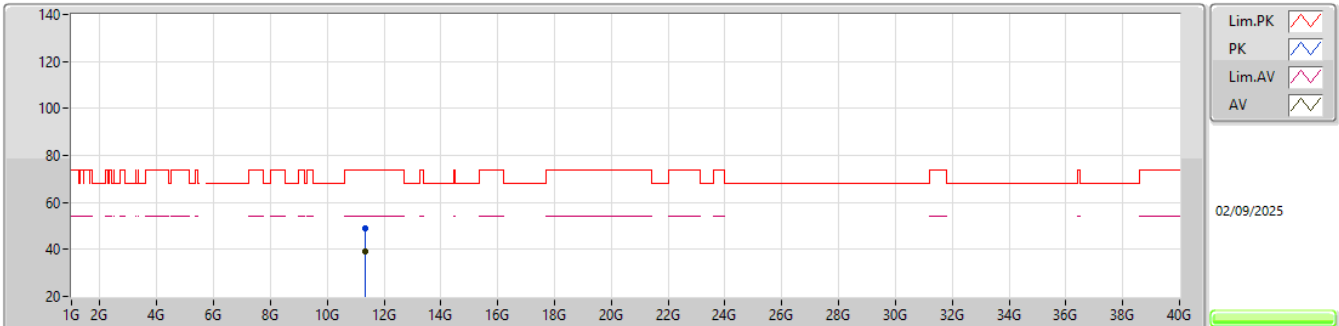


EUT_Y_4TX
Setting 68
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.34624G	48.88	74.00	-25.12	43.49	3	Horizontal	312	1.80	-	39.10	11.78	45.49			
AV	11.343G	38.90	54.00	-15.10	33.51	3	Horizontal	312	1.80	-	39.10	11.78	45.49			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

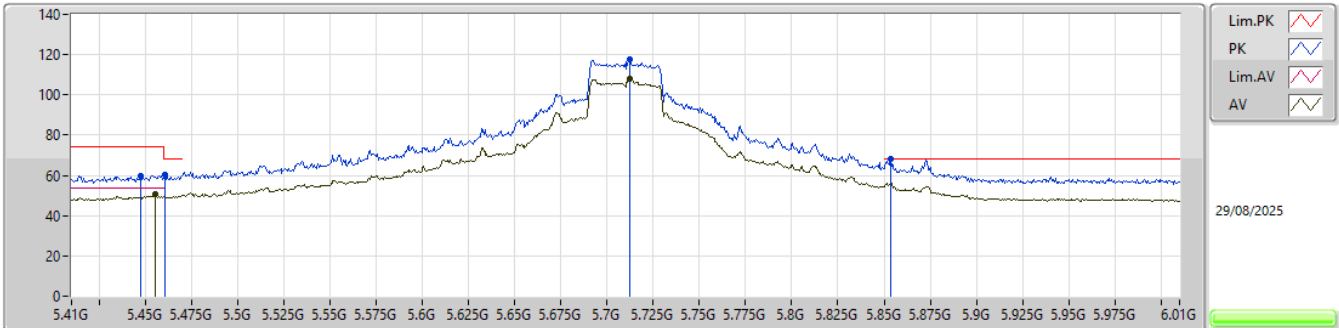


EUT_Y_4TX
SET 88
80\105\76\90\83\86\87\88
6.44\15.71\6.61\0.08\6.16\0.75\0.75\0.30

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4472G	59.78	74.00	-14.22	53.63	3	Vertical	339	1.80	88	32.90	8.25	35.00			
PK	5.4604G	60.27	68.20	-7.93	54.08	3	Vertical	339	1.80	88	32.92	8.26	34.99			
AV	5.4556G	50.44	54.00	-3.56	44.27	3	Vertical	339	1.80	88	32.91	8.26	35.00			
PK	5.7124G	117.58	Inf	-Inf	110.59	3	Vertical	339	1.80	88	33.45	8.42	34.88			
AV	5.7124G	108.01	Inf	-Inf	101.02	3	Vertical	339	1.80	88	33.45	8.42	34.88			
PK	5.8534G	67.90	68.20	-0.30	60.33	3	Vertical	339	1.80	88	33.91	8.47	34.81			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

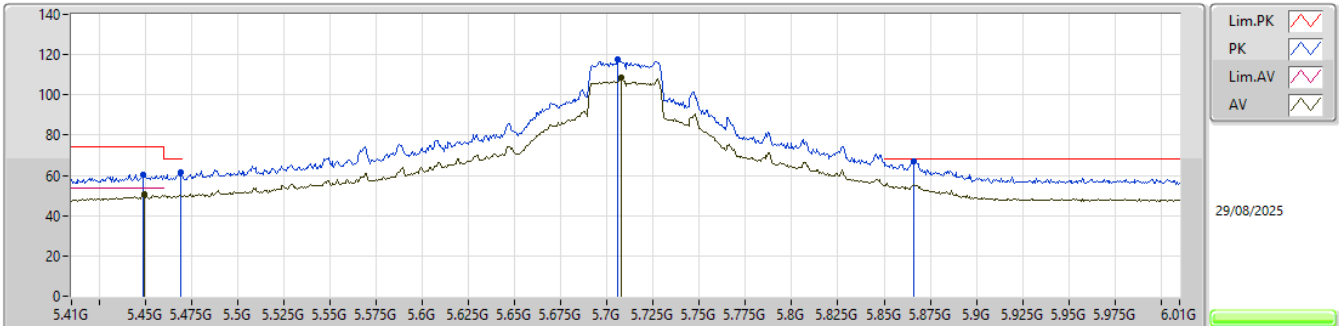


EUT_Y_4TX
SET 88
88
1.16

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.449G	60.41	74.00	-13.59	54.26	3	Horizontal	338	1.80	88	32.90	8.25	35.00			
AV	5.4496G	50.62	54.00	-3.38	44.47	3	Horizontal	338	1.80	88	32.90	8.25	35.00			
PK	5.4694G	61.65	68.20	-6.55	55.43	3	Horizontal	338	1.80	88	32.94	8.27	34.99			
PK	5.7058G	117.43	Inf	-Inf	110.47	3	Horizontal	338	1.80	88	33.42	8.42	34.88			
AV	5.7076G	108.83	Inf	-Inf	101.86	3	Horizontal	338	1.80	88	33.43	8.42	34.88			
PK	5.866G	67.04	68.20	-1.16	59.40	3	Horizontal	338	1.80	88	33.96	8.48	34.80			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX


5710MHz Straddle 5.47-5.725GHz_TX

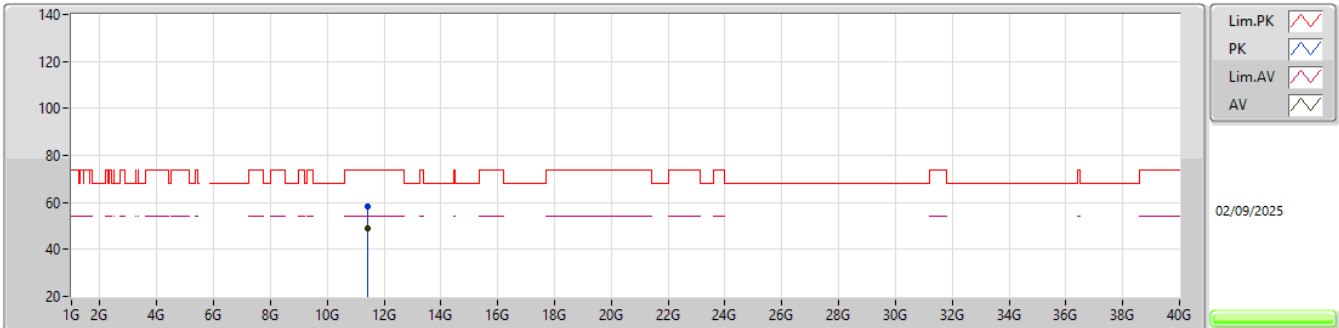EUT Y_4TX
Setting 88
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.41322G	58.16	74.00	-15.84	52.62	3	Vertical	308	1.80	-	39.10	11.82	45.38			
AV	11.4167G	48.97	54.00	-5.03	43.42	3	Vertical	308	1.80	-	39.10	11.82	45.37			

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

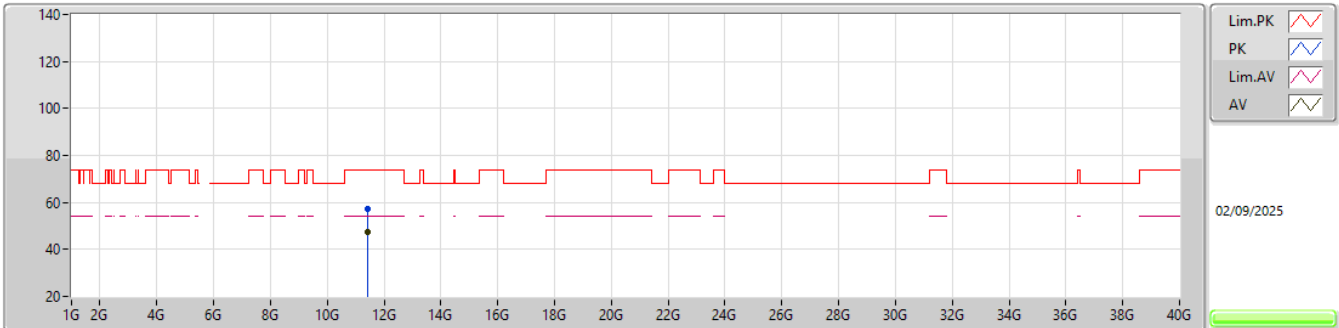


EUT_V_4TX
Setting 88
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.42066G	57.17	74.00	-16.83	51.62	3	Horizontal	35	1.79	-	39.10	11.82	45.37			
AV	11.42081G	47.16	54.00	-6.84	41.61	3	Horizontal	35	1.79	-	39.10	11.82	45.37			

5.25-5.35GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5290MHz_TX

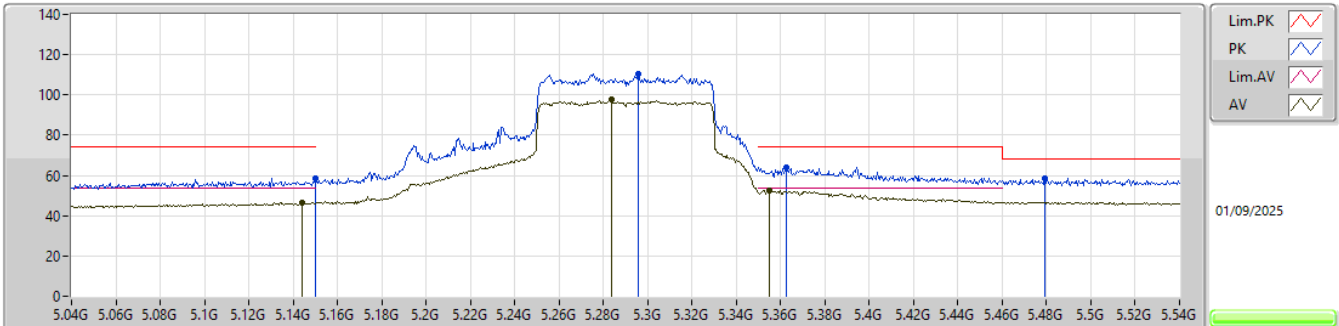


EUT_Y_4TX
Setting 76
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	58.31	74.00	-15.69	53.35	3	Vertical	341	1.66	-	31.90	6.78	33.72
AV	5.144G	46.54	54.00	-7.46	41.61	3	Vertical	341	1.66	-	31.88	6.77	33.72
PK	5.2955G	110.24	Inf	-Inf	105.93	3	Vertical	341	1.66	-	31.21	6.86	33.76
AV	5.2835G	97.57	Inf	-Inf	93.23	3	Vertical	341	1.66	-	31.23	6.86	33.75
PK	5.3625G	64.21	74.00	-9.79	59.79	3	Vertical	341	1.66	-	31.32	6.87	33.77
AV	5.355G	52.64	54.00	-1.36	48.23	3	Vertical	341	1.66	-	31.31	6.87	33.77
PK	5.479G	58.45	68.20	-9.75	53.74	3	Vertical	341	1.66	-	31.62	6.89	33.80

5.25-5.35GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5290MHz_TX

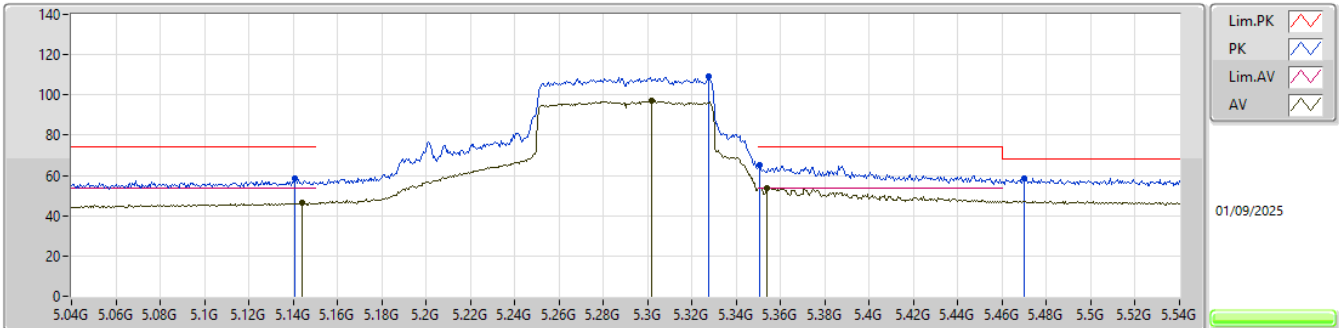


EUT_Y_4TX
Setting 76
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1405G	58.28	74.00	-15.72	53.38	3	Horizontal	352	1.83	-	31.86	6.76	33.72			
AV	5.144G	46.38	54.00	-7.62	41.45	3	Horizontal	352	1.83	-	31.88	6.77	33.72			
PK	5.3275G	108.98	Inf	-Inf	104.62	3	Horizontal	352	1.83	-	31.26	6.87	33.77			
AV	5.302G	97.28	Inf	-Inf	92.97	3	Horizontal	352	1.83	-	31.20	6.87	33.76			
PK	5.3505G	65.18	74.00	-8.82	60.78	3	Horizontal	352	1.83	-	31.30	6.87	33.77			
AV	5.354G	53.96	54.00	-0.04	49.55	3	Horizontal	352	1.83	-	31.31	6.87	33.77			
PK	5.47G	58.43	68.20	-9.77	53.76	3	Horizontal	352	1.83	-	31.58	6.89	33.80			

5.25-5.35GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5290MHz_TX

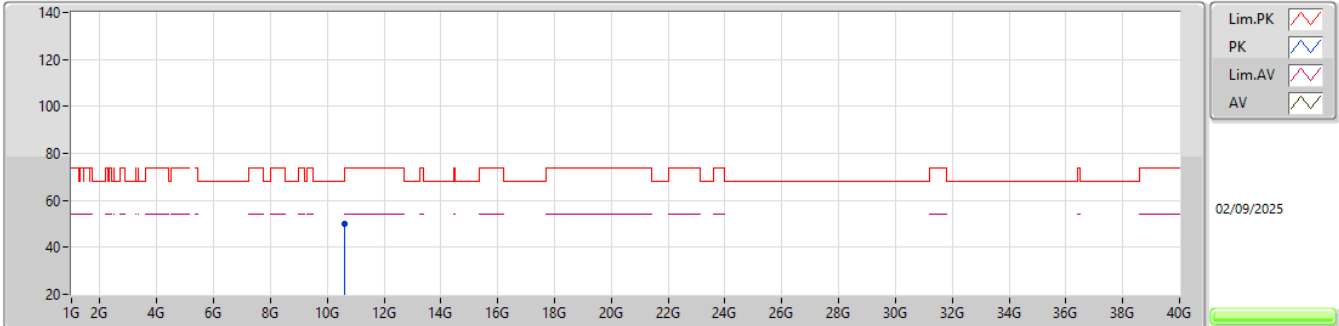


EUT_Y_4TX
Setting 76
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.59461G	49.88	68.20	-18.32	44.95	3	Vertical	48	1.80	-	39.17	11.39	45.63			

5.25-5.35GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5290MHz_TX

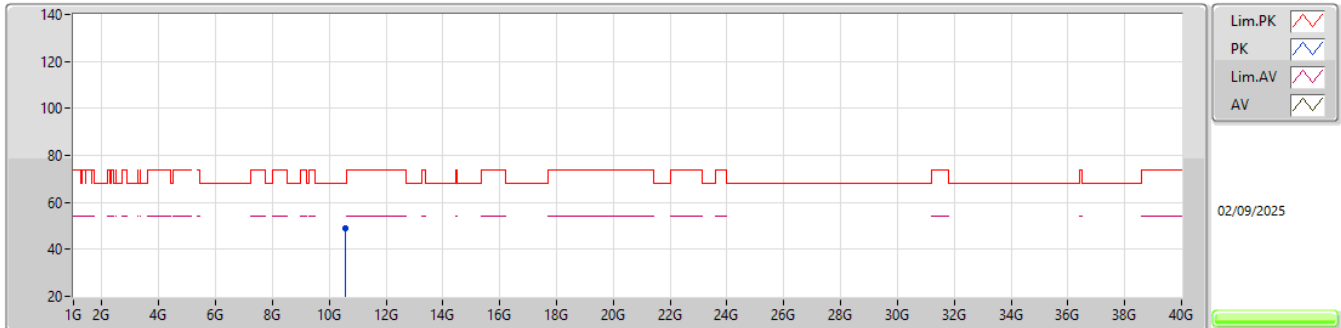


EUT_Y_4TX
Setting 76
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58891G	48.92	68.20	-19.28	44.04	3	Horizontal	301	1.80	-	39.13	11.38	45.63			

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5530MHz_TX

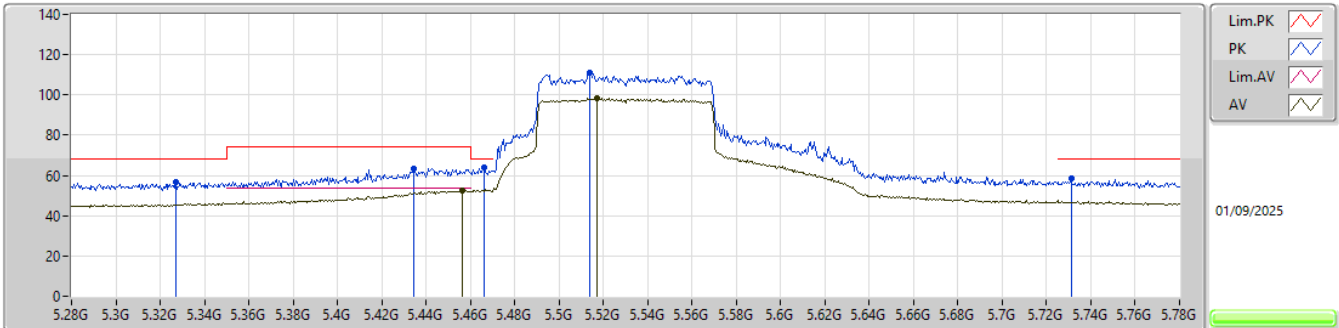


EUT_Y_4TX
Setting 77
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.327G	56.58	68.20	-11.62	52.23	3	Vertical	344	1.74	-	31.25	6.87	33.77
PK	5.4345G	63.53	74.00	-10.47	58.96	3	Vertical	344	1.74	-	31.47	6.89	33.79
PK	5.466G	64.02	68.20	-4.18	59.37	3	Vertical	344	1.74	-	31.56	6.89	33.80
AV	5.4565G	52.77	54.00	-1.23	48.15	3	Vertical	344	1.74	-	31.53	6.89	33.80
PK	5.514G	110.89	Inf	-Inf	106.10	3	Vertical	344	1.74	-	31.70	6.90	33.81
AV	5.517G	98.51	Inf	-Inf	93.72	3	Vertical	344	1.74	-	31.70	6.90	33.81
PK	5.731G	58.29	68.20	-9.91	52.98	3	Vertical	344	1.74	-	32.00	7.09	33.78

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5530MHz_TX

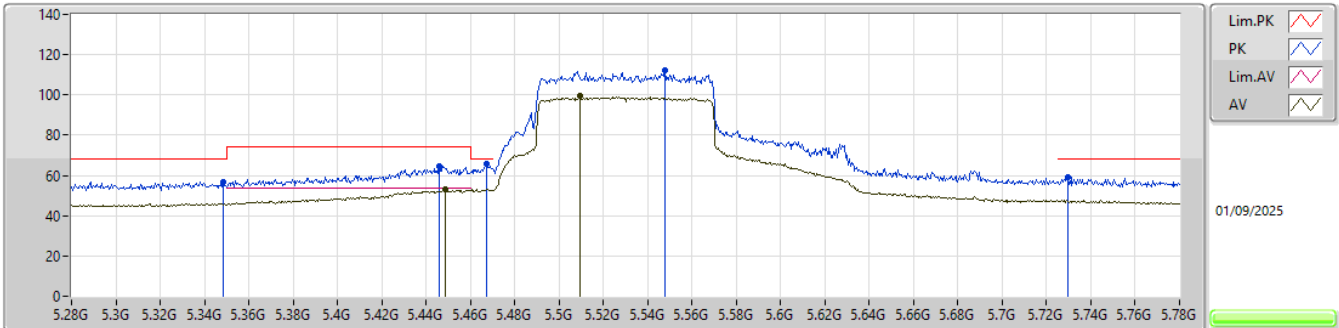


EUT_Y_4TX
Setting 77
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3485G	56.64	68.20	-11.56	52.24	3	Horizontal	349	1.94	-	31.30	6.87	33.77
PK	5.446G	64.83	74.00	-9.17	60.25	3	Horizontal	349	1.94	-	31.49	6.89	33.80
AV	5.4485G	53.19	54.00	-0.81	48.60	3	Horizontal	349	1.94	-	31.50	6.89	33.80
PK	5.4675G	65.78	68.20	-2.42	61.12	3	Horizontal	349	1.94	-	31.57	6.89	33.80
PK	5.548G	111.96	Inf	-Inf	107.16	3	Horizontal	349	1.94	-	31.70	6.90	33.80
AV	5.5095G	99.31	Inf	-Inf	94.52	3	Horizontal	349	1.94	-	31.70	6.90	33.81
PK	5.7295G	59.30	68.20	-8.90	54.00	3	Horizontal	349	1.94	-	32.00	7.08	33.78

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX


5530MHz_TX

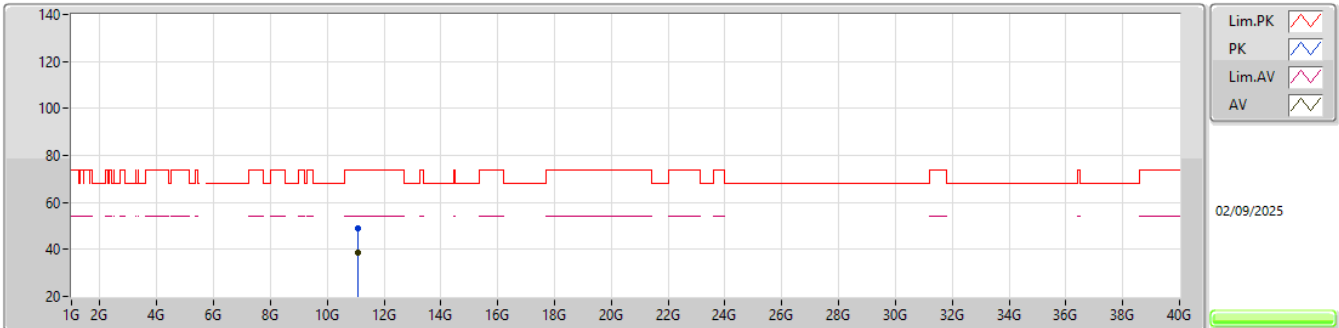EUT_V_4TX
Setting 77
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.07479G	48.79	74.00	-25.21	44.02	3	Vertical	45	1.80	-	39.05	11.64	45.92			
AV	11.07353G	38.58	54.00	-15.42	33.81	3	Vertical	45	1.80	-	39.05	11.64	45.92			

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX


5530MHz_TX

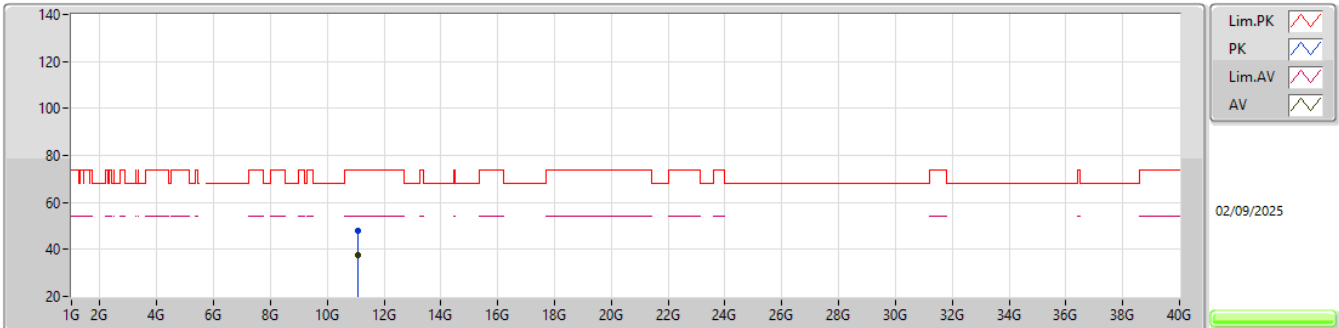EUT_Y_4TX
Setting 77
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.07098G	47.81	74.00	-26.19	43.06	3	Horizontal	270	1.80	-	39.04	11.64	45.93			
AV	11.07293G	37.42	54.00	-16.58	32.65	3	Horizontal	270	1.80	-	39.05	11.64	45.92			

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5610MHz_TX

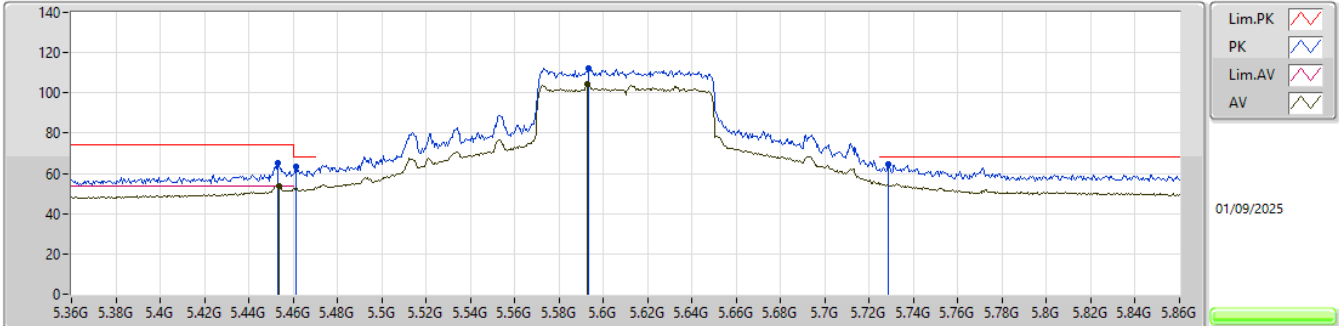


EUT_Y_4TX
Setting 76
05-R-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.453G	64.99	74.00	-9.01	58.82	3	Vertical	354	1.80	-	32.91	8.26	35.00
AV	5.4535G	53.75	54.00	-0.25	47.58	3	Vertical	354	1.80	-	32.91	8.26	35.00
PK	5.4615G	63.10	68.20	-5.10	56.90	3	Vertical	354	1.80	-	32.92	8.27	34.99
PK	5.5935G	112.24	Inf	-Inf	105.89	3	Vertical	354	1.80	-	32.91	8.38	34.94
AV	5.5925G	104.28	Inf	-Inf	97.93	3	Vertical	354	1.80	-	32.91	8.38	34.94
PK	5.7285G	64.45	68.20	-3.75	57.38	3	Vertical	354	1.80	-	33.51	8.43	34.87

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5610MHz_TX

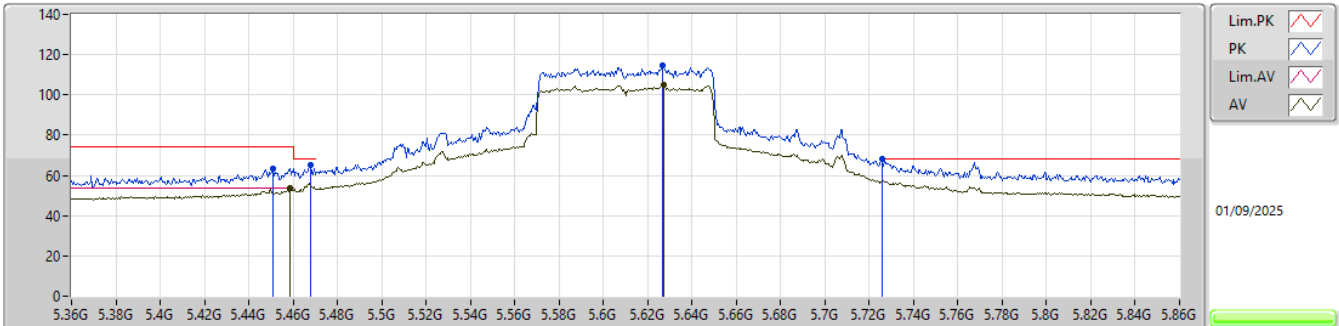


EUT_Y_4TX
Setting 76
05-R-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.451G	63.18	74.00	-10.82	57.02	3	Horizontal	359	1.80	-	32.90	8.26	35.00			
AV	5.4585G	53.42	54.00	-0.58	47.23	3	Horizontal	359	1.80	-	32.92	8.26	34.99			
PK	5.468G	65.39	68.20	-2.81	59.17	3	Horizontal	359	1.80	-	32.94	8.27	34.99			
PK	5.6265G	114.53	Inf	-Inf	108.10	3	Horizontal	359	1.80	-	32.95	8.40	34.92			
AV	5.627G	105.16	Inf	-Inf	98.73	3	Horizontal	359	1.80	-	32.95	8.40	34.92			
PK	5.726G	68.07	68.20	-0.13	61.01	3	Horizontal	359	1.80	-	33.50	8.43	34.87			

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5610MHz_TX

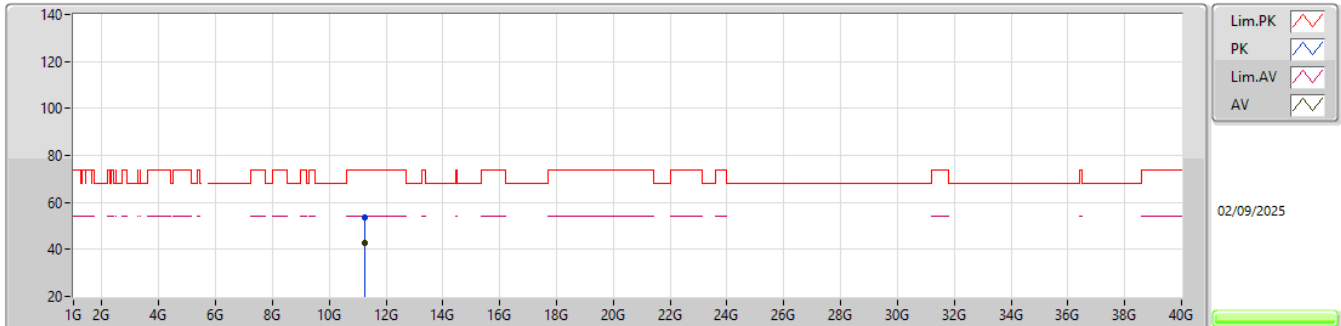


EUT Y_4TX
Setting 76
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.2349G	53.76	74.00	-20.24	48.70	3	Vertical	311	1.80	-	39.00	11.72	45.66			
AV	11.23445G	42.64	54.00	-11.36	37.58	3	Vertical	311	1.80	-	39.00	11.72	45.66			

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX


5610MHz_TX

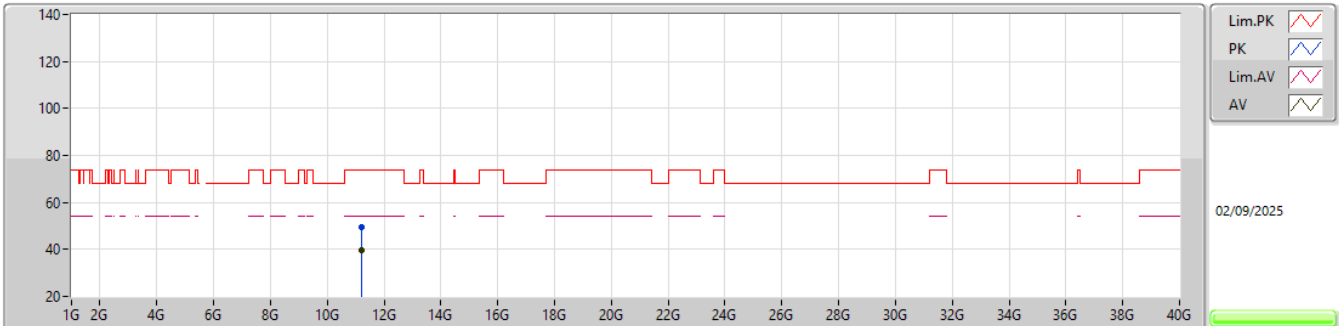EUT Y_4TX
Setting 76
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22815G	49.42	74.00	-24.58	44.37	3	Horizontal	0	1.80	-	39.00	11.72	45.67			
AV	11.2285G	39.87	54.00	-14.13	34.82	3	Horizontal	0	1.80	-	39.00	11.72	45.67			

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

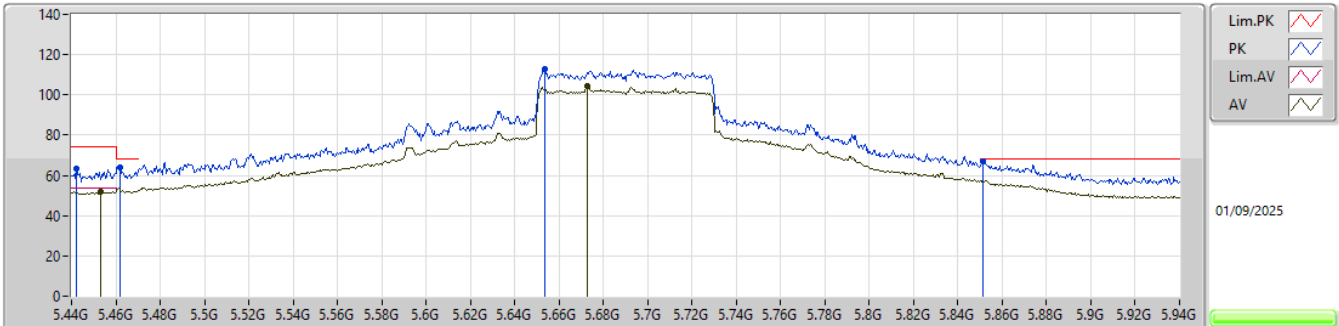


EUT Y_4TX
Setting 79
05-R-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.442G	63.45	74.00	-10.55	57.30	3	Vertical	355	1.80	-	32.90	8.25	35.00			
PK	5.462G	64.04	68.20	-4.16	57.84	3	Vertical	355	1.80	-	32.92	8.27	34.99			
AV	5.453G	52.09	54.00	-1.91	45.92	3	Vertical	355	1.80	-	32.91	8.26	35.00			
PK	5.6535G	113.04	Inf	-Inf	106.51	3	Vertical	355	1.80	-	33.03	8.41	34.91			
AV	5.6725G	104.29	Inf	-Inf	97.60	3	Vertical	355	1.80	-	33.18	8.41	34.90			
PK	5.8515G	67.02	68.20	-1.18	59.45	3	Vertical	355	1.80	-	33.91	8.47	34.81			

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

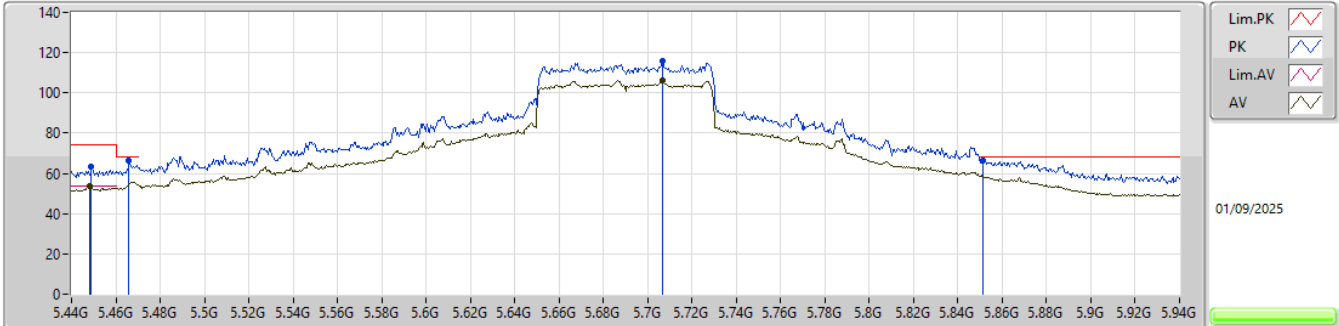


EUT Y_4TX
Setting 79
05-R-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.449G	63.19	74.00	-10.81	57.04	3	Horizontal	359	1.80	-	32.90	8.25	35.00
AV	5.448G	53.70	54.00	-0.30	47.55	3	Horizontal	359	1.80	-	32.90	8.25	35.00
PK	5.466G	66.32	68.20	-1.88	60.11	3	Horizontal	359	1.80	-	32.93	8.27	34.99
PK	5.7065G	115.95	Inf	-Inf	108.98	3	Horizontal	359	1.80	-	33.43	8.42	34.88
AV	5.7065G	106.06	Inf	-Inf	99.09	3	Horizontal	359	1.80	-	33.43	8.42	34.88
PK	5.8515G	66.68	68.20	-1.52	59.11	3	Horizontal	359	1.80	-	33.91	8.47	34.81

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX


5690MHz Straddle 5.47-5.725GHz_TX

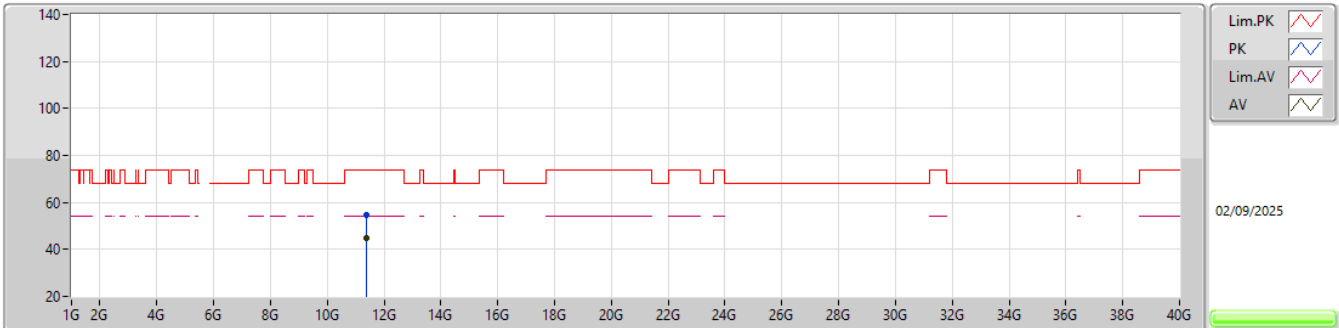EUT_Y_4TX
Setting 79
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.39485G	54.46	74.00	-19.54	48.96	3	Vertical	307	1.80	-	39.10	11.81	45.41			
AV	11.3934G	44.81	54.00	-9.19	39.31	3	Vertical	307	1.80	-	39.10	11.81	45.41			

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

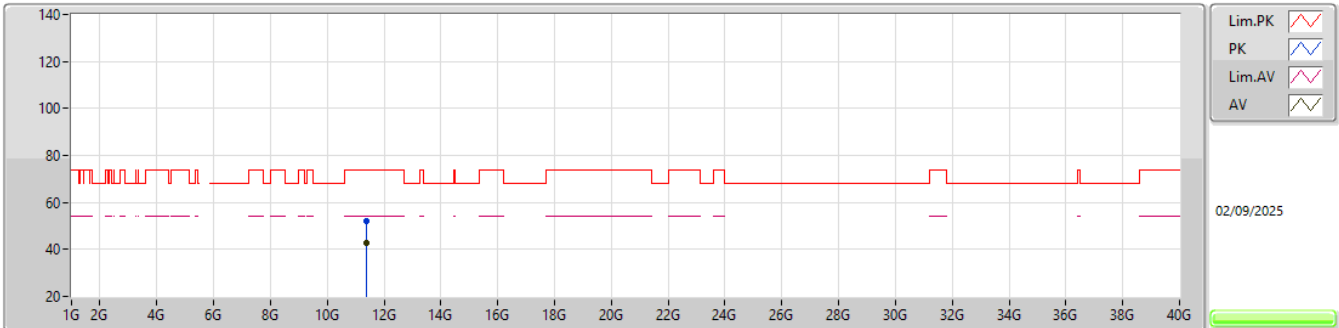


EUT_Y_4TX
Setting 79
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.3975G	51.94	74.00	-22.06	46.43	3	Horizontal	37	1.80	-	39.10	11.81	45.40			
AV	11.3903G	42.87	54.00	-11.13	37.38	3	Horizontal	37	1.80	-	39.10	11.81	45.42			

5.25-5.35GHz_802.11be EHT160_Nss4,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

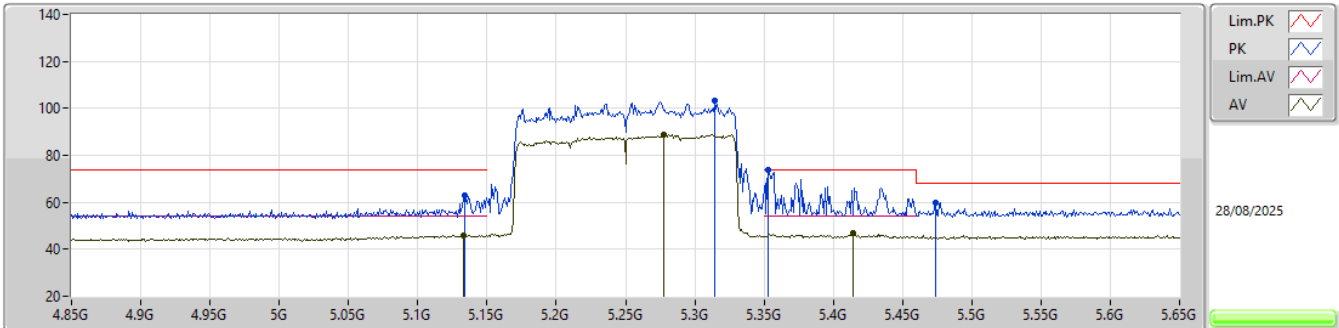


EUT_Y_4TX
Setting 52
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.134G	63.10	74.00	-10.90	58.22	3	Vertical	341	1.52	-	31.84	6.75	33.71			
AV	5.1332G	46.07	54.00	-7.93	41.20	3	Vertical	341	1.52	-	31.83	6.75	33.71			
PK	5.3148G	103.24	Inf	-Inf	98.90	3	Vertical	341	1.52	-	31.23	6.87	33.76			
AV	5.278G	88.81	Inf	-Inf	84.46	3	Vertical	341	1.52	-	31.24	6.86	33.75			
PK	5.3532G	73.66	74.00	-0.34	69.25	3	Vertical	341	1.52	-	31.31	6.87	33.77			
PK	5.474G	59.89	68.20	-8.31	55.20	3	Vertical	341	1.52	-	31.60	6.89	33.80			
AV	5.414G	46.69	54.00	-7.31	42.17	3	Vertical	341	1.52	-	31.43	6.88	33.79			

5.25-5.35GHz_802.11be EHT160_Nss4,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

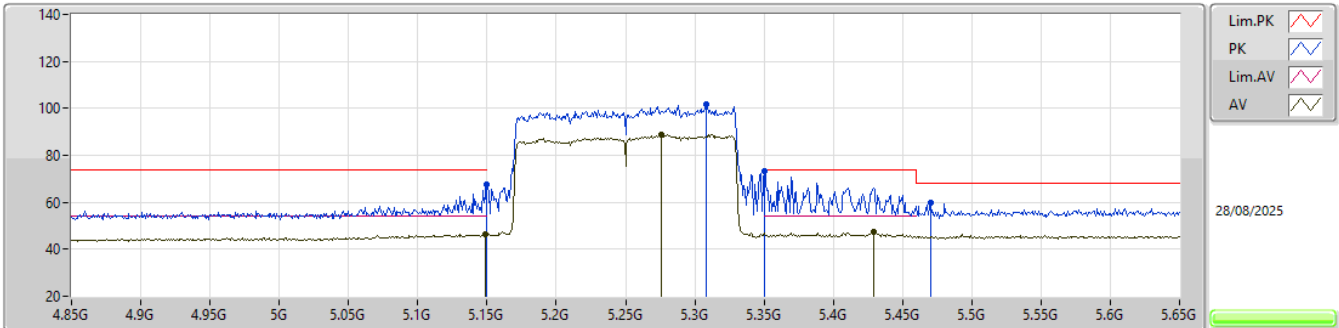


EUT_Y_4TX
Setting 52
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	67.63	74.00	-6.37	62.67	3	Horizontal	348	1.80	-	31.90	6.78	33.72			
AV	5.1492G	46.38	54.00	-7.62	41.42	3	Horizontal	348	1.80	-	31.90	6.78	33.72			
PK	5.3084G	101.60	Inf	-Inf	97.27	3	Horizontal	348	1.80	-	31.22	6.87	33.76			
AV	5.2756G	88.73	Inf	-Inf	84.37	3	Horizontal	348	1.80	-	31.25	6.86	33.75			
PK	5.35G	73.49	74.00	-0.51	69.09	3	Horizontal	348	1.80	-	31.30	6.87	33.77			
PK	5.47G	59.91	68.20	-8.29	55.24	3	Horizontal	348	1.80	-	31.58	6.89	33.80			
AV	5.4292G	47.24	54.00	-6.76	42.69	3	Horizontal	348	1.80	-	31.46	6.88	33.79			

5.25-5.35GHz_802.11be EHT160_Nss4,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

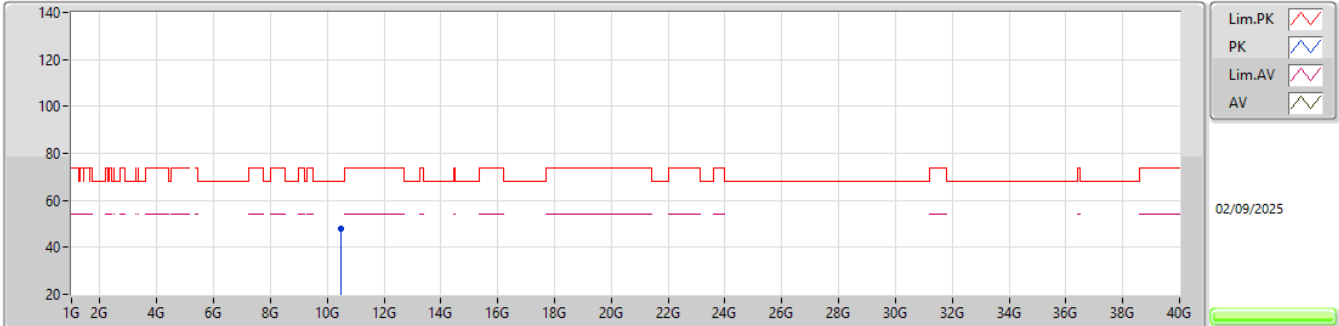


EUT_Y_4TX
Setting 52
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.5011G	47.76	68.20	-20.44	43.16	3	Vertical	11	1.80	-	38.80	11.34	45.54				

5.25-5.35GHz_802.11be EHT160_Nss4,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

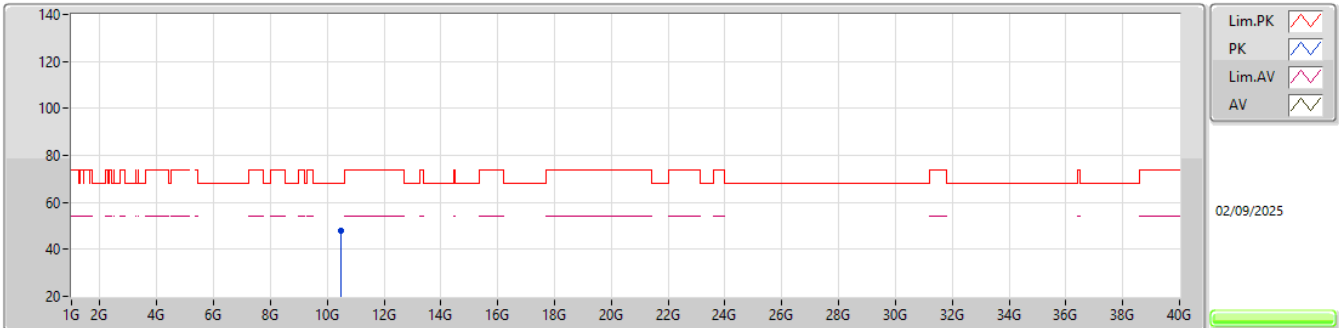


EUT_Y_4TX
Setting 52
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4754G	48.09	68.20	-20.11	43.45	3	Horizontal	346	1.80	-	38.85	11.32	45.53			

5.47-5.725GHz_802.11be EHT160_Nss4,(MCS0)_4TX

5570MHz_TX

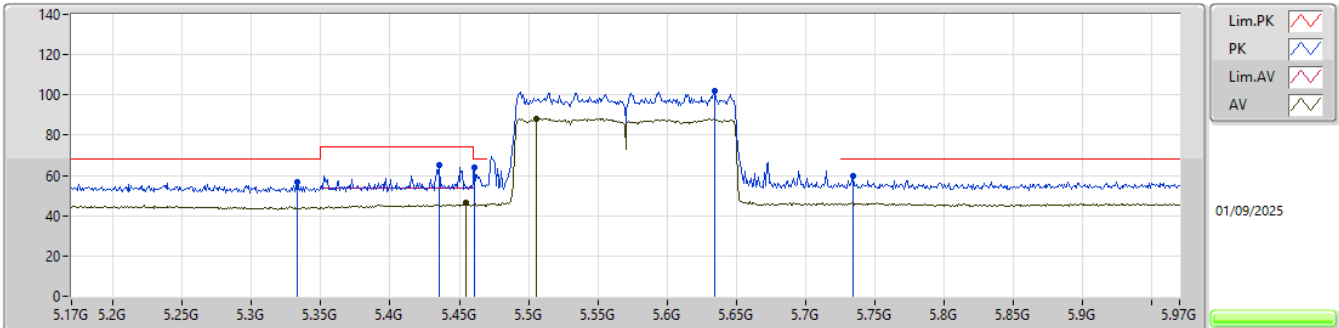


EUT_Y_4TX
Setting 49
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3332G	56.60	68.20	-11.60	52.23	3	Vertical	343	1.71	-	31.27	6.87	33.77
PK	5.4356G	65.17	74.00	-8.83	60.60	3	Vertical	343	1.71	-	31.47	6.89	33.79
PK	5.4612G	63.99	68.20	-4.21	59.36	3	Vertical	343	1.71	-	31.54	6.89	33.80
AV	5.4548G	46.26	54.00	-7.74	41.65	3	Vertical	343	1.71	-	31.52	6.89	33.80
AV	5.506G	88.29	Inf	-Inf	83.50	3	Vertical	343	1.71	-	31.70	6.90	33.81
PK	5.6348G	102.10	Inf	-Inf	97.26	3	Vertical	343	1.71	-	31.67	6.96	33.79
PK	5.734G	59.92	68.20	-8.28	54.61	3	Vertical	343	1.71	-	32.00	7.09	33.78

5.47-5.725GHz_802.11be EHT160_Nss4,(MCS0)_4TX


5570MHz_TX

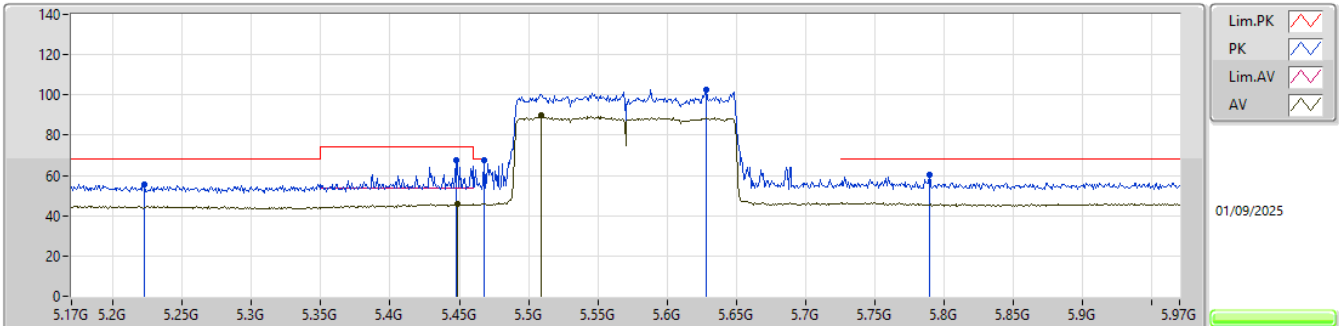EUT_Y_4TX
Setting 49
06-H-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2228G	55.72	68.20	-12.48	51.15	3	Horizontal	348	1.80	-	31.46	6.85	33.74
PK	5.4476G	67.76	74.00	-6.24	63.17	3	Horizontal	348	1.80	-	31.50	6.89	33.80
AV	5.4484G	45.88	54.00	-8.12	41.29	3	Horizontal	348	1.80	-	31.50	6.89	33.80
PK	5.4676G	67.77	68.20	-0.43	63.11	3	Horizontal	348	1.80	-	31.57	6.89	33.80
AV	5.5092G	89.64	Inf	-Inf	84.85	3	Horizontal	348	1.80	-	31.70	6.90	33.81
PK	5.6284G	102.71	Inf	-Inf	97.89	3	Horizontal	348	1.80	-	31.66	6.95	33.79
PK	5.7892G	60.10	68.20	-8.10	54.71	3	Horizontal	348	1.80	-	32.00	7.17	33.78

5.47-5.725GHz_802.11be EHT160_Nss4,(MCS0)_4TX


5570MHz_TX

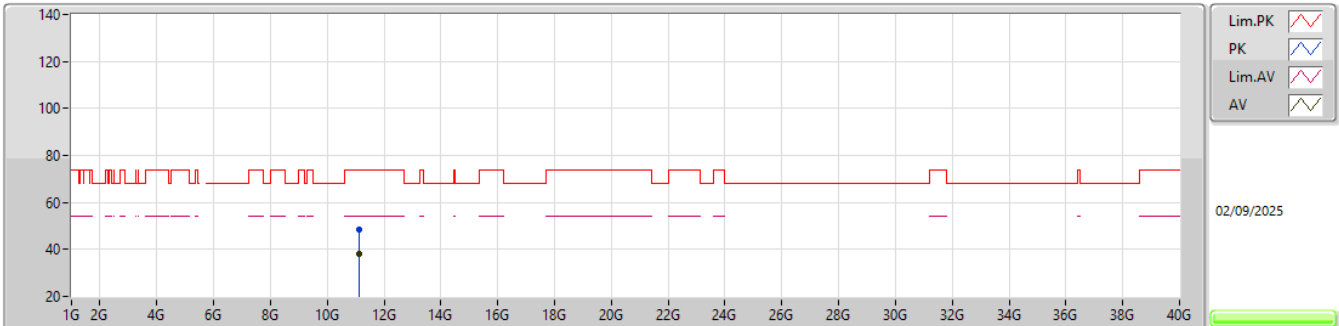EUT_V_4TX
Setting 49
05-R-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.13965G	48.24	74.00	-25.76	43.37	3	Vertical	341	1.80	-	39.02	11.67	45.82			
AV	11.1215G	38.05	54.00	-15.95	33.18	3	Vertical	341	1.80	-	39.06	11.66	45.85			

5.47-5.725GHz_802.11be EHT160_Nss4,(MCS0)_4TX

5570MHz_TX

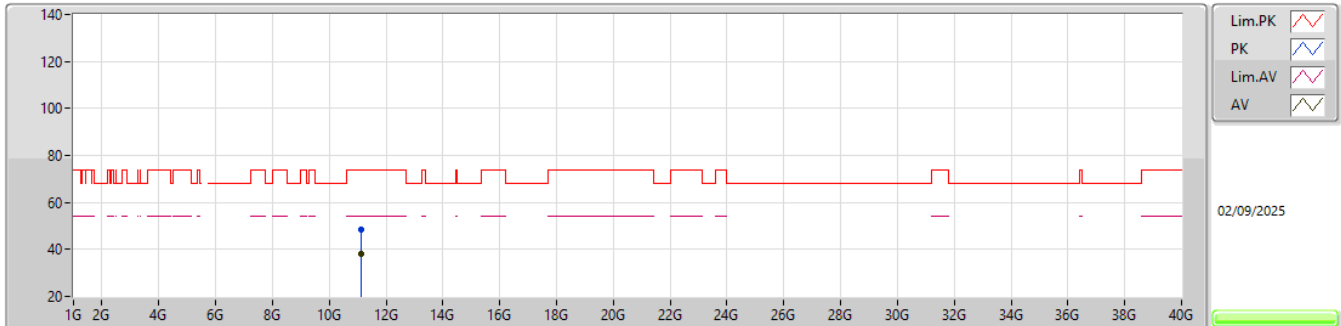

EUT_V_4TX
Setting 49
05-R-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.12401G	48.34	74.00	-25.66	43.46	3	Horizontal	1	1.80	-	39.05	11.67	45.84			
AV	11.124G	37.85	54.00	-16.15	32.97	3	Horizontal	1	1.80	-	39.05	11.67	45.84			




Test Mode: Mode 5

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT40_Nss2,(MCS0)_2TX	Pass	PK	5.8572G	68.19	68.20	-0.01	3	Vertical	352	1.84	-

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

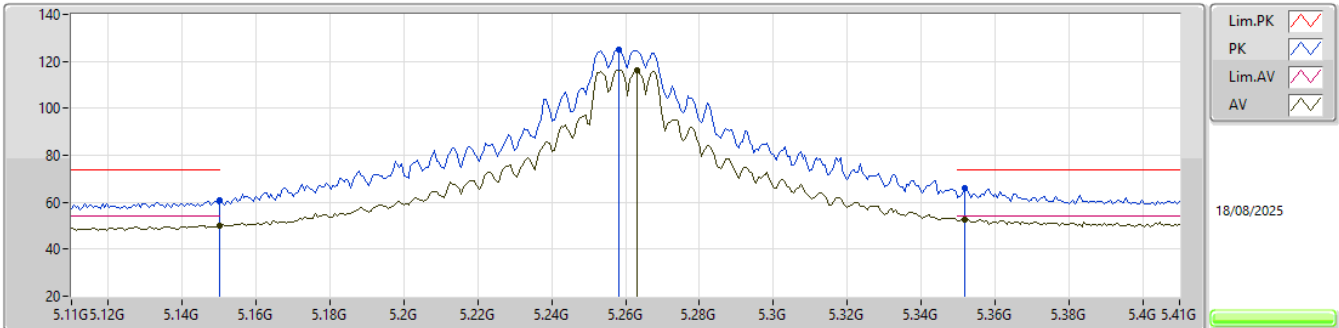


EUT_Y_2TX
Setting 98
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	60.65	74.00	-13.35	54.09	3	Vertical	352	1.80	-	33.50	6.78	33.72			
AV	5.15G	50.02	54.00	-3.98	43.46	3	Vertical	352	1.80	-	33.50	6.78	33.72			
PK	5.2582G	124.80	Inf	-Inf	117.87	3	Vertical	352	1.80	-	33.82	6.86	33.75			
AV	5.263G	116.39	Inf	-Inf	109.45	3	Vertical	352	1.80	-	33.83	6.86	33.75			
PK	5.3518G	65.91	74.00	-8.09	59.10	3	Vertical	352	1.80	-	33.71	6.87	33.77			
AV	5.3518G	52.60	54.00	-1.40	45.79	3	Vertical	352	1.80	-	33.71	6.87	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

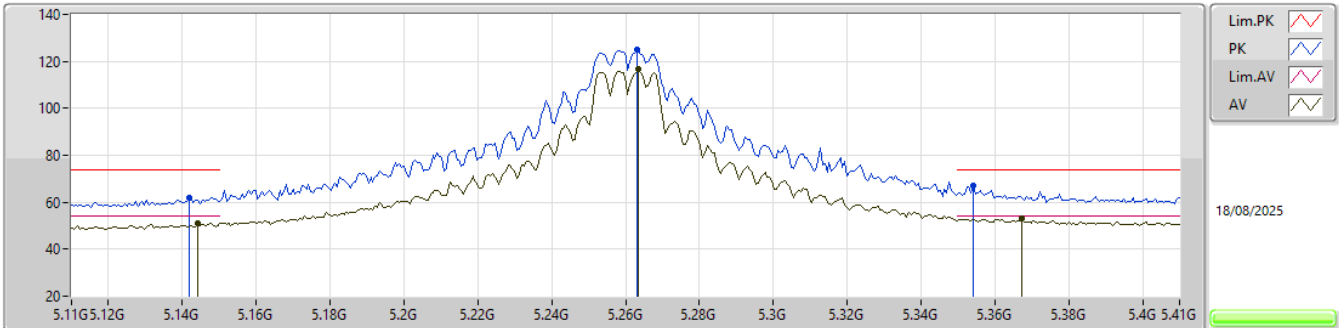


EUT_Y_2TX
Setting 98
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1418G	62.03	74.00	-11.97	55.48	3	Horizontal	0	1.80	-	33.50	6.77	33.72			
AV	5.1442G	51.04	54.00	-2.96	44.49	3	Horizontal	0	1.80	-	33.50	6.77	33.72			
PK	5.263G	125.01	Inf	-Inf	118.07	3	Horizontal	0	1.80	-	33.83	6.86	33.75			
AV	5.2636G	116.55	Inf	-Inf	109.61	3	Horizontal	0	1.80	-	33.83	6.86	33.75			
PK	5.3542G	66.92	74.00	-7.08	60.10	3	Horizontal	0	1.80	-	33.72	6.87	33.77			
AV	5.3674G	53.30	54.00	-0.70	46.43	3	Horizontal	0	1.80	-	33.77	6.88	33.78			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

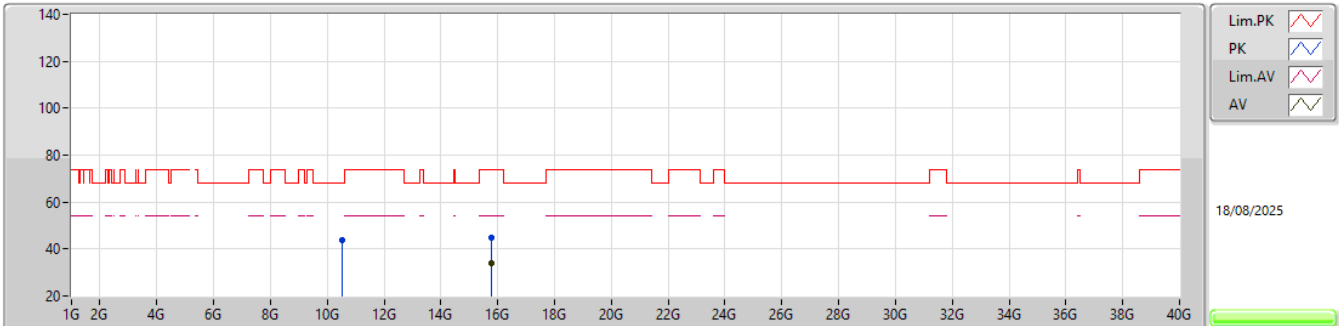


EUT_Y_2TX
Setting 98
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51736G	44.01	68.20	-24.19	60.23	3	Vertical	284	2.97	-	39.37	11.12	66.71			
PK	15.78228G	44.87	74.00	-29.13	56.26	3	Vertical	360.6	1.80	-	39.26	13.27	63.92			
AV	15.76536G	34.00	54.00	-20.00	45.42	3	Vertical	360.6	1.80	-	39.23	13.26	63.91			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

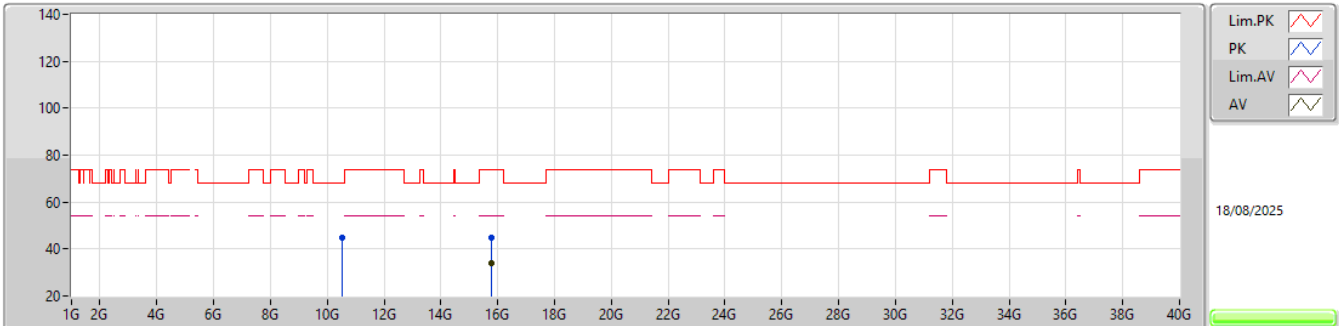


EUT_Y_2TX
Setting 98
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5209G	44.72	68.20	-23.48	60.93	3	Horizontal	140	2.63	-	39.38	11.12	66.71			
PK	15.77826G	44.93	74.00	-29.07	56.33	3	Horizontal	92	2.38	-	39.26	13.26	63.92			
AV	15.79416G	34.00	54.00	-20.00	45.35	3	Horizontal	92	2.38	-	39.29	13.28	63.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

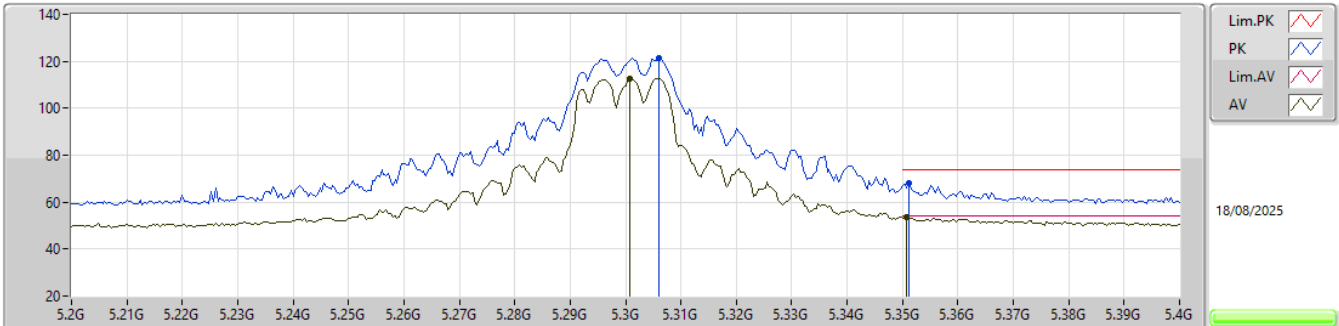


EUT Y_2TX
Setting 82
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.306G	121.61	Inf	-Inf	114.62	3	Vertical	359	1.96	-	33.88	6.87	33.76				
AV	5.3008G	112.82	Inf	-Inf	105.81	3	Vertical	359	1.96	-	33.90	6.87	33.76				
PK	5.3512G	67.85	74.00	-6.15	61.05	3	Vertical	359	1.96	-	33.70	6.87	33.77				
AV	5.3508G	53.66	54.00	-0.34	46.86	3	Vertical	359	1.96	-	33.70	6.87	33.77				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

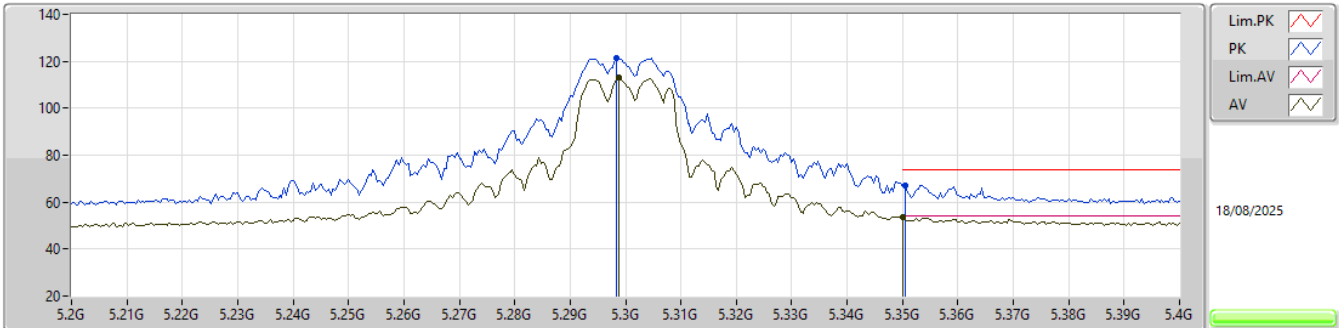


EUT_Y_2TX
Setting 82
06-E-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2984G	121.49	Inf	-Inf	114.49	3	Horizontal	356	1.80	-	33.90	6.86	33.76				
AV	5.2988G	112.85	Inf	-Inf	105.85	3	Horizontal	356	1.80	-	33.90	6.86	33.76				
PK	5.3504G	67.14	74.00	-6.86	60.34	3	Horizontal	356	1.80	-	33.70	6.87	33.77				
AV	5.35G	53.74	54.00	-0.26	46.94	3	Horizontal	356	1.80	-	33.70	6.87	33.77				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

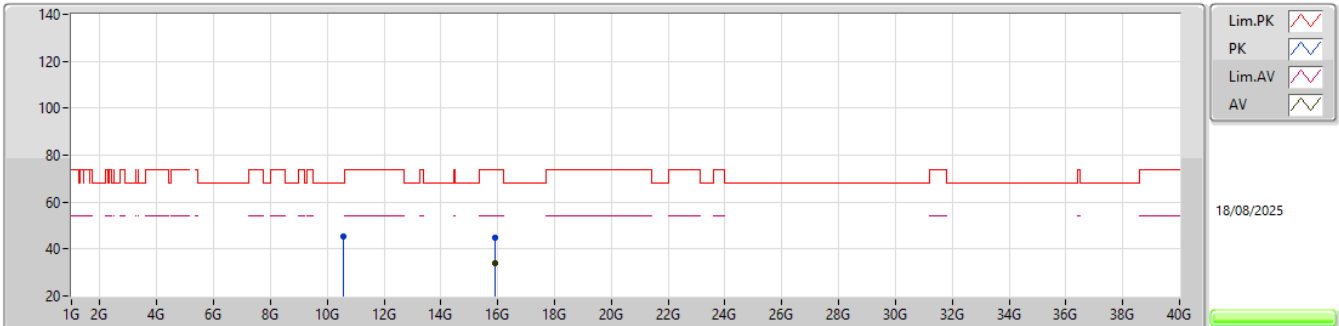


EUT_Y_2TX
Setting 82
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5889G	45.26	68.20	-22.94	61.15	3	Vertical	143	1.68	-	39.58	11.16	66.63			
PK	15.91074G	44.71	74.00	-29.29	56.38	3	Vertical	292	1.84	-	38.94	13.36	63.97			
AV	15.90942G	33.72	54.00	-20.28	45.39	3	Vertical	292	1.84	-	38.94	13.36	63.97			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

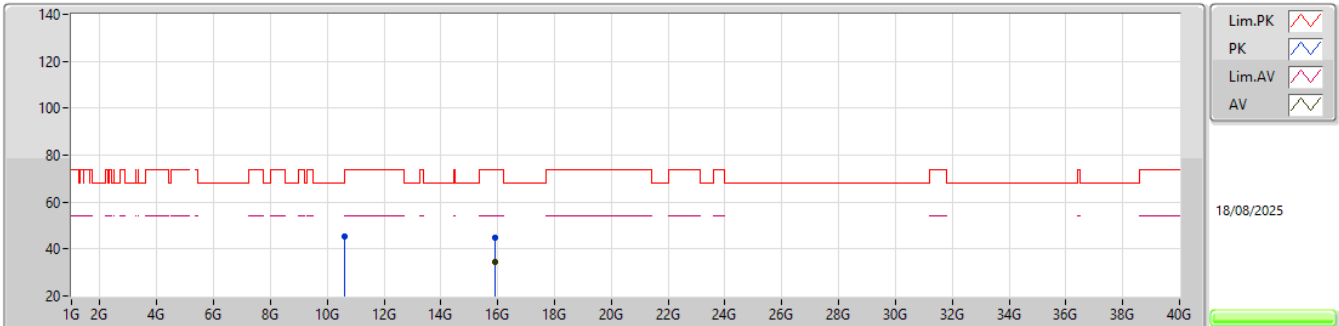


EUT_Y_2TX
Setting 82
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.6075G	45.40	74.00	-28.60	61.25	3	Horizontal	195	1.81	-	39.59	11.17	66.61			
PK	15.90522G	44.97	74.00	-29.03	56.66	3	Horizontal	188	2.42	-	38.92	13.35	63.96			
AV	15.90432G	34.26	54.00	-19.74	45.95	3	Horizontal	188	2.42	-	38.92	13.35	63.96			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

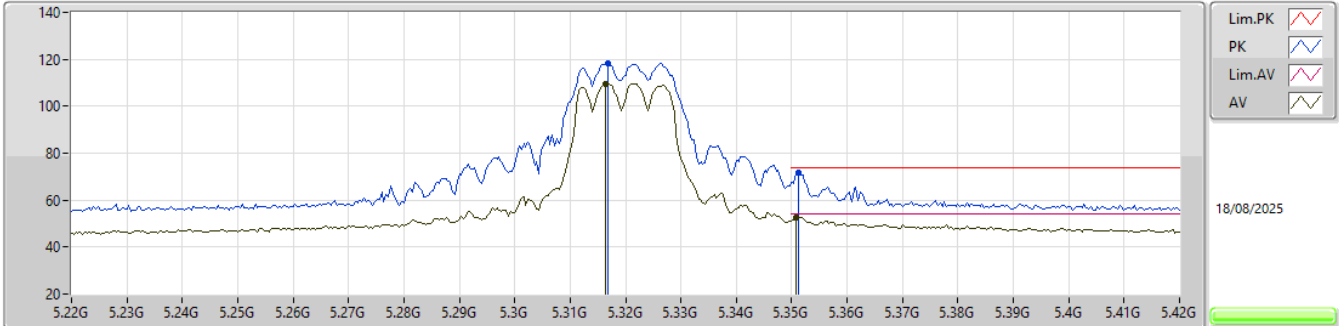


EUT_Y_2TX
Setting 72
06-E-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3168G	118.51	Inf	-Inf	111.57	3	Vertical	356	1.85	-	33.83	6.87	33.76				
AV	5.3164G	109.57	Inf	-Inf	102.63	3	Vertical	356	1.85	-	33.83	6.87	33.76				
PK	5.3512G	71.75	74.00	-2.25	64.95	3	Vertical	356	1.85	-	33.70	6.87	33.77				
AV	5.3508G	52.77	54.00	-1.23	45.97	3	Vertical	356	1.85	-	33.70	6.87	33.77				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

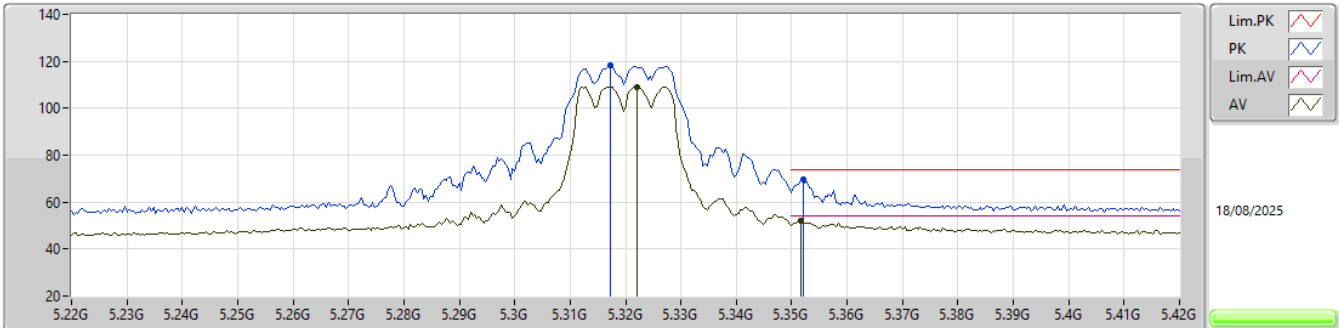


EUT_Y_2TX
Setting 72
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3172G	118.18	Inf	-Inf	111.24	3	Horizontal	3	1.80	-	33.83	6.87	33.76			
AV	5.322G	109.13	Inf	-Inf	102.21	3	Horizontal	3	1.80	-	33.81	6.87	33.76			
PK	5.352G	69.60	74.00	-4.40	62.79	3	Horizontal	3	1.80	-	33.71	6.87	33.77			
AV	5.3516G	52.03	54.00	-1.97	45.22	3	Horizontal	3	1.80	-	33.71	6.87	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

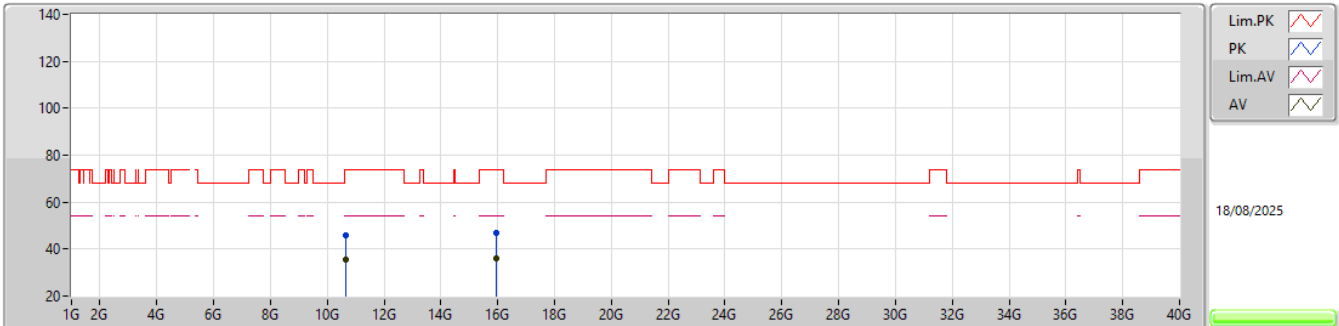


EUT_Y_2TX
Setting 72
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.65098G	45.99	74.00	-28.01	61.86	3	Vertical	286	1.01	-	39.50	11.20	66.57				
AV	10.64792G	35.37	54.00	-18.63	51.24	3	Vertical	286	1.01	-	39.50	11.20	66.57				
PK	15.94938G	46.77	74.00	-27.23	58.27	3	Vertical	278	1.84	-	39.10	13.38	63.98				
AV	15.96972G	35.92	54.00	-18.08	47.21	3	Vertical	278	1.84	-	39.30	13.40	63.99				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

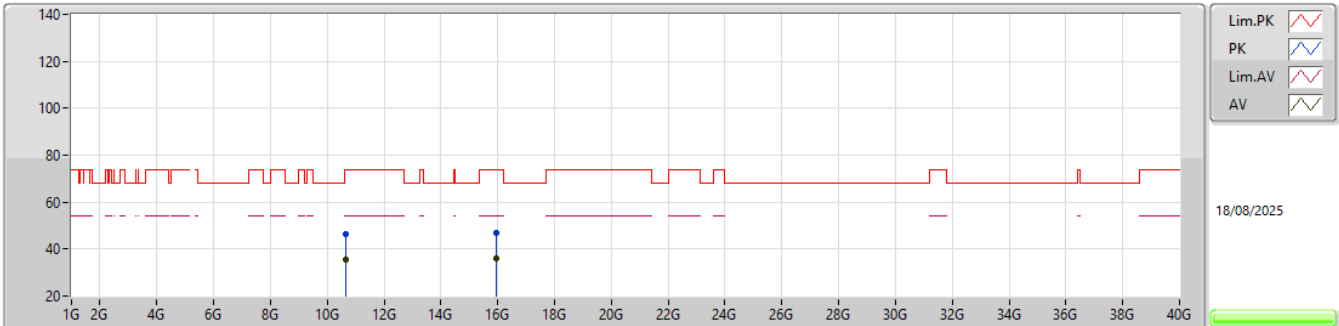


EUT_Y_2TX
Setting 72
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.64588G	46.50	74.00	-27.50	62.36	3	Horizontal	28	2.04	-	39.51	11.20	66.57				
AV	10.64762G	35.46	54.00	-18.54	51.33	3	Horizontal	28	2.04	-	39.50	11.20	66.57				
PK	15.96684G	47.14	74.00	-26.86	58.46	3	Horizontal	207	1.27	-	39.27	13.40	63.99				
AV	15.96444G	36.16	54.00	-17.84	47.51	3	Horizontal	207	1.27	-	39.24	13.40	63.99				

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5260MHz_TX

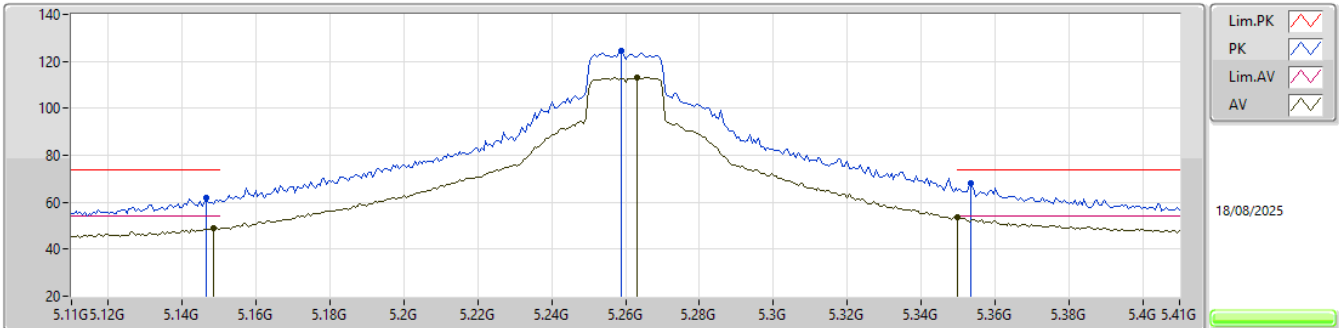


EUT_Y_2TX
Setting 95
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1466G	62.02	74.00	-11.98	55.47	3	Vertical	348	1.81	-	33.50	6.77	33.72			
AV	5.1484G	49.04	54.00	-4.96	42.48	3	Vertical	348	1.81	-	33.50	6.78	33.72			
PK	5.2588G	124.32	Inf	-Inf	117.39	3	Vertical	348	1.81	-	33.82	6.86	33.75			
AV	5.263G	112.98	Inf	-Inf	106.04	3	Vertical	348	1.81	-	33.83	6.86	33.75			
PK	5.3536G	68.01	74.00	-5.99	61.20	3	Vertical	348	1.81	-	33.71	6.87	33.77			
AV	5.35G	53.87	54.00	-0.13	47.07	3	Vertical	348	1.81	-	33.70	6.87	33.77			

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5260MHz_TX

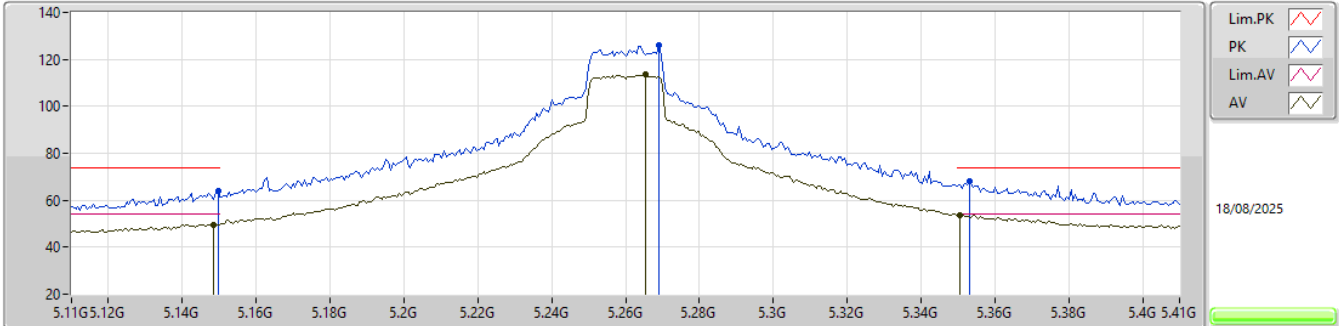


EUT Y_2TX
Setting 95
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	63.96	74.00	-10.04	57.40	3	Horizontal	360	1.80	-	33.50	6.78	33.72			
AV	5.1484G	49.70	54.00	-4.30	43.14	3	Horizontal	360	1.80	-	33.50	6.78	33.72			
PK	5.269G	126.05	Inf	-Inf	119.10	3	Horizontal	360	1.80	-	33.84	6.86	33.75			
AV	5.2654G	113.48	Inf	-Inf	106.54	3	Horizontal	360	1.80	-	33.83	6.86	33.75			
PK	5.353G	68.22	74.00	-5.78	61.41	3	Horizontal	360	1.80	-	33.71	6.87	33.77			
AV	5.3506G	53.70	54.00	-0.30	46.90	3	Horizontal	360	1.80	-	33.70	6.87	33.77			

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5260MHz_TX

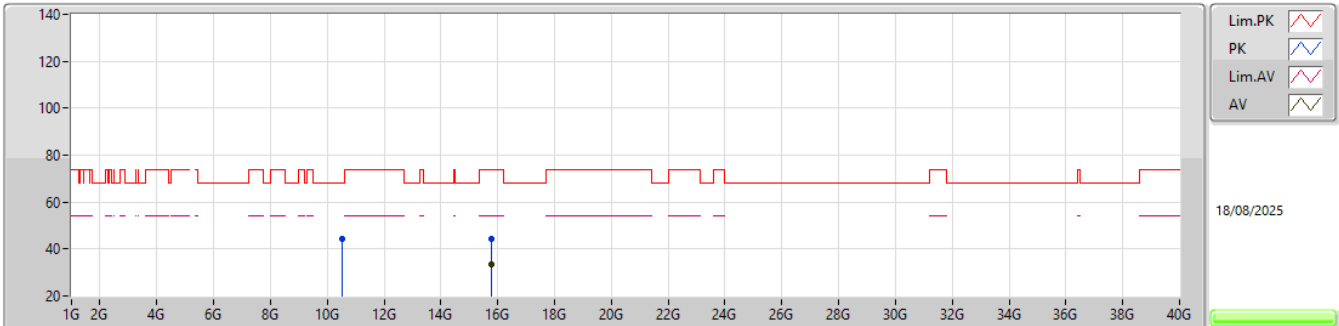


EUT_Y_2TX
Setting 95
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51952G	44.39	68.20	-23.81	60.60	3	Vertical	250	2.78	-	39.38	11.12	66.71			
PK	15.79068G	44.53	74.00	-29.47	55.90	3	Vertical	343	1.52	-	39.28	13.27	63.92			
AV	15.76656G	33.64	54.00	-20.36	45.06	3	Vertical	343	1.52	-	39.23	13.26	63.91			

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5260MHz_TX

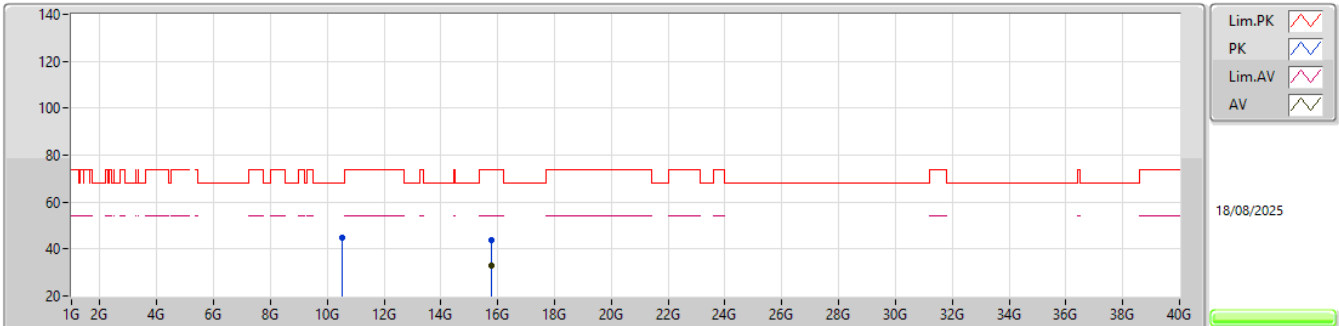


EUT_Y_2TX
Setting 95
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.52816G	44.81	68.20	-23.39	60.98	3	Horizontal	37	2.89	-	39.41	11.12	66.70			
PK	15.76872G	43.98	74.00	-30.02	55.39	3	Horizontal	126	1.67	-	39.24	13.26	63.91			
AV	15.77088G	33.00	54.00	-21.00	44.41	3	Horizontal	126	1.67	-	39.24	13.26	63.91			

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5300MHz_TX

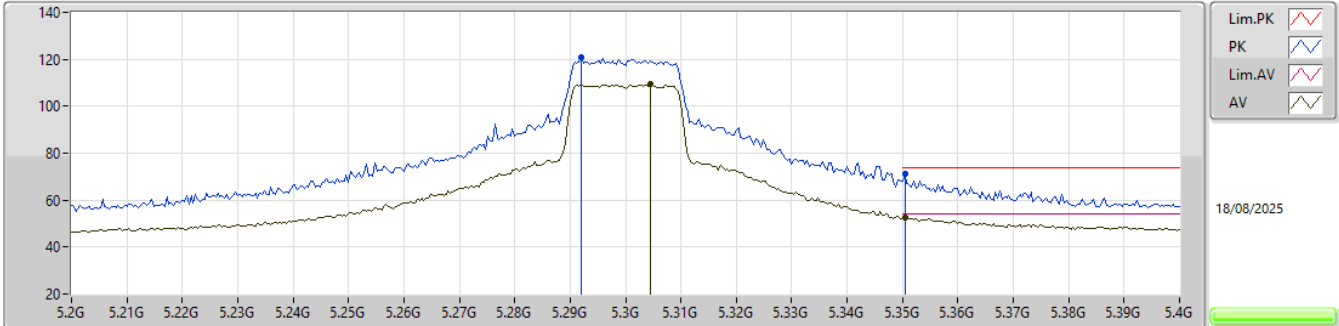


EUT_Y_2TX
Setting 78
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.292G	120.77	Inf	-Inf	113.79	3	Vertical	352	1.80	-	33.88	6.86	33.76			
AV	5.3044G	109.44	Inf	-Inf	102.45	3	Vertical	352	1.80	-	33.88	6.87	33.76			
PK	5.3504G	71.14	74.00	-2.86	64.34	3	Vertical	352	1.80	-	33.70	6.87	33.77			
AV	5.3504G	52.48	54.00	-1.52	45.68	3	Vertical	352	1.80	-	33.70	6.87	33.77			

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5300MHz_TX

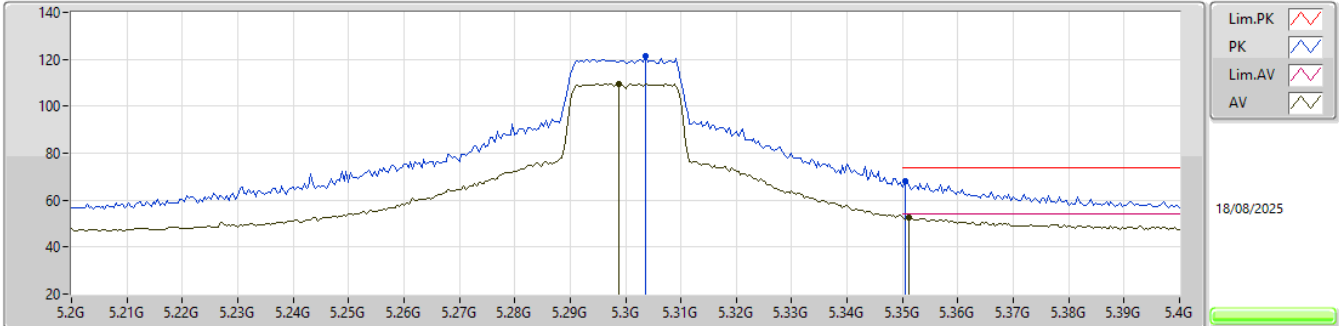


EUT_Y_2TX
Setting 78
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3036G	121.52	Inf	-Inf	114.52	3	Horizontal	360	1.80	-	33.89	6.87	33.76				
AV	5.2988G	109.57	Inf	-Inf	102.57	3	Horizontal	360	1.80	-	33.90	6.86	33.76				
PK	5.3504G	68.25	74.00	-5.75	61.45	3	Horizontal	360	1.80	-	33.70	6.87	33.77				
AV	5.3512G	52.55	54.00	-1.45	45.75	3	Horizontal	360	1.80	-	33.70	6.87	33.77				

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5300MHz_TX

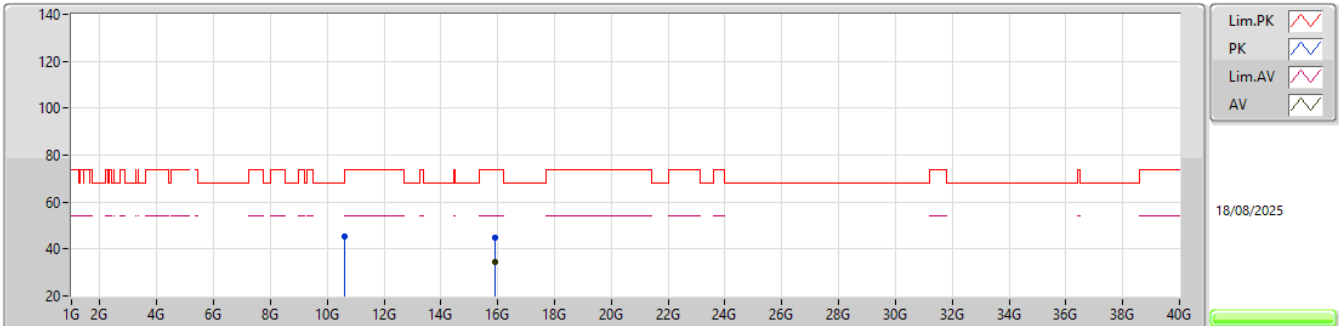


EUT_Y_2TX
Setting 78
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.594G	45.47	68.20	-22.73	61.34	3	Vertical	60	1.40	-	39.59	11.17	66.63			
PK	15.91242G	45.03	74.00	-28.97	56.69	3	Vertical	346	1.01	-	38.95	13.36	63.97			
AV	15.90186G	34.44	54.00	-19.56	46.14	3	Vertical	346	1.01	-	38.91	13.35	63.96			

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5300MHz_TX

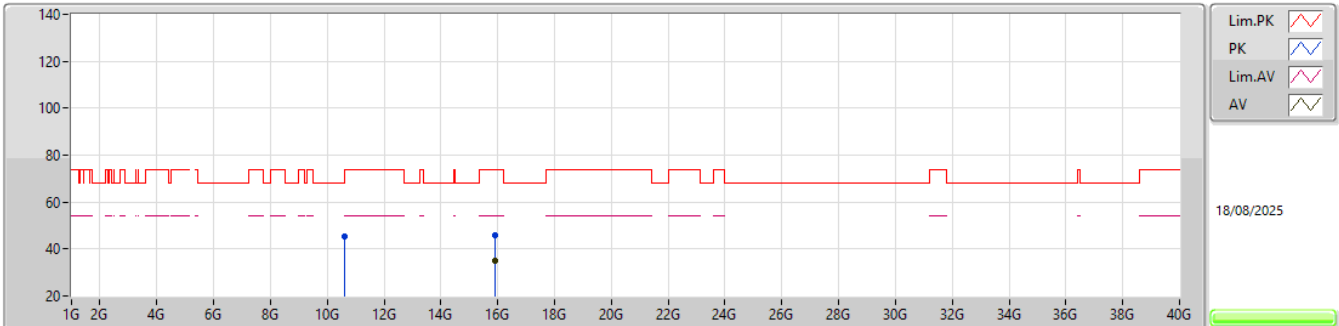


EUT_Y_2TX
Setting 78
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5907G	45.18	68.20	-23.02	61.07	3	Horizontal	274	2.62	-	39.58	11.16	66.63			
PK	15.91236G	45.85	74.00	-28.15	57.51	3	Horizontal	8	2.25	-	38.95	13.36	63.97			
AV	15.90588G	34.86	54.00	-19.14	46.55	3	Horizontal	8	2.25	-	38.92	13.35	63.96			

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5320MHz_TX

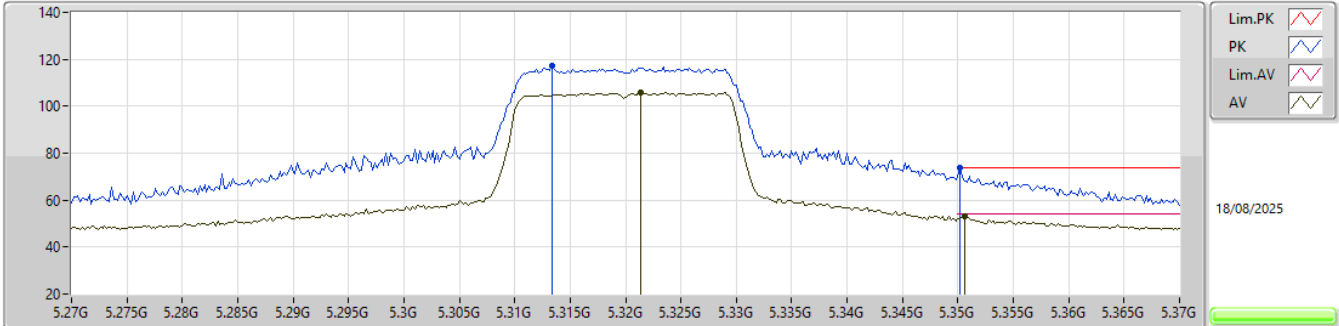


EUT_Y_2TX
Setting 67
06-E-R-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3134G	117.27	Inf	-Inf	110.31	3	Vertical	6	1.73	-	33.85	6.87	33.76			
AV	5.3214G	105.90	Inf	-Inf	98.98	3	Vertical	6	1.73	-	33.81	6.87	33.76			
PK	5.3502G	73.88	74.00	-0.12	67.08	3	Vertical	6	1.73	-	33.70	6.87	33.77			
AV	5.3506G	53.09	54.00	-0.91	46.29	3	Vertical	6	1.73	-	33.70	6.87	33.77			

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5320MHz_TX

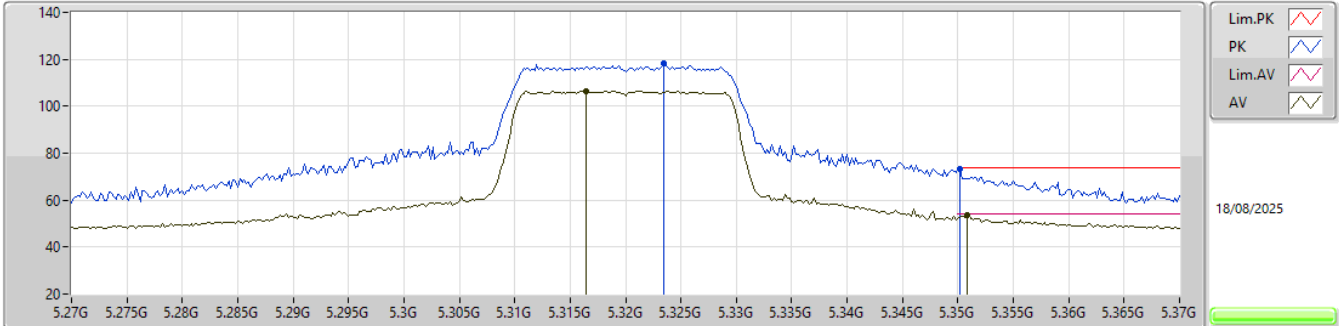


EUT_Y_2TX
Setting 67
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3234G	118.11	Inf	-Inf	111.19	3	Horizontal	360	1.90	-	33.81	6.87	33.76
AV	5.3164G	106.51	Inf	-Inf	99.57	3	Horizontal	360	1.90	-	33.83	6.87	33.76
PK	5.3502G	73.34	74.00	-0.66	66.54	3	Horizontal	360	1.90	-	33.70	6.87	33.77
AV	5.3508G	53.80	54.00	-0.20	47.00	3	Horizontal	360	1.90	-	33.70	6.87	33.77

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5320MHz_TX

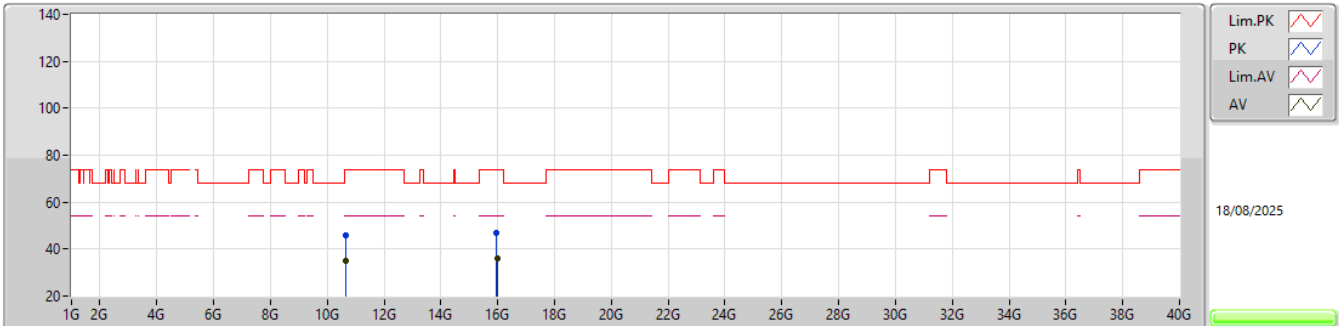


EUT_Y_2TX
Setting 67
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63994G	45.79	74.00	-28.21	61.65	3	Vertical	232	1.90	-	39.52	11.20	66.58			
AV	10.64474G	34.80	54.00	-19.20	50.66	3	Vertical	232	1.90	-	39.51	11.20	66.57			
PK	15.96798G	46.67	74.00	-27.33	57.98	3	Vertical	258	1.13	-	39.28	13.40	63.99			
AV	15.97272G	36.17	54.00	-17.83	47.43	3	Vertical	258	1.13	-	39.33	13.40	63.99			

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5320MHz_TX

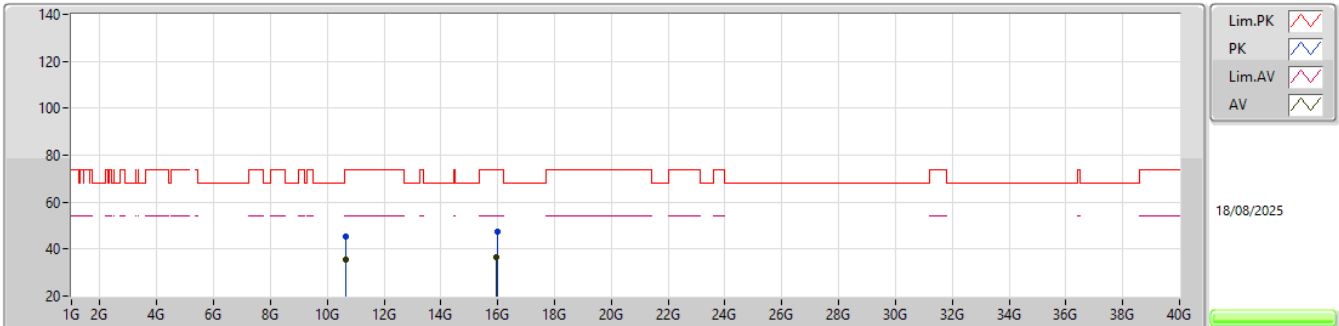


EUT_Y_2TX
Setting 67
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63784G	45.52	74.00	-28.48	61.39	3	Horizontal	67	1.73	-	39.52	11.19	66.58			
AV	10.6505G	35.50	54.00	-18.50	51.37	3	Horizontal	67	1.73	-	39.50	11.20	66.57			
PK	15.97344G	47.25	74.00	-26.75	58.51	3	Horizontal	210	1.65	-	39.33	13.40	63.99			
AV	15.9669G	36.79	54.00	-17.21	48.11	3	Horizontal	210	1.65	-	39.27	13.40	63.99			

5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5270MHz_TX

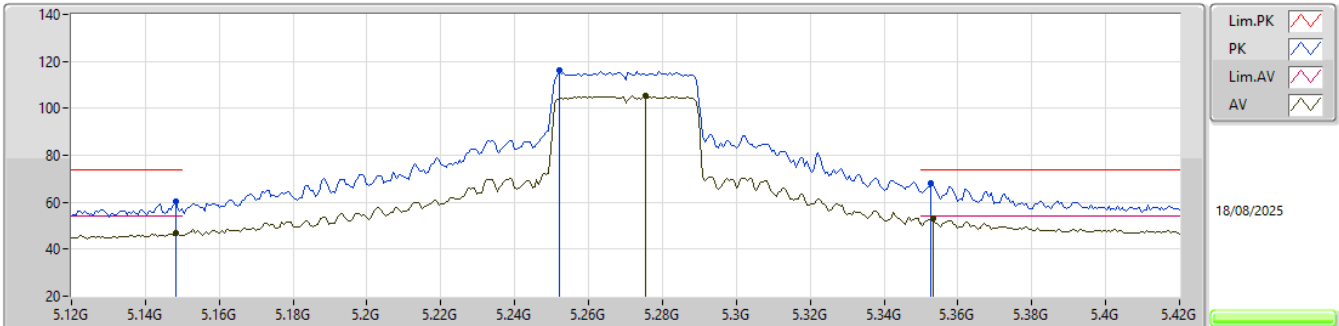


EUT Y_2TX
Setting 74
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1482G	60.37	74.00	-13.63	53.82	3	Vertical	346	1.79	-	33.50	6.77	33.72			
AV	5.1482G	46.82	54.00	-7.18	40.27	3	Vertical	346	1.79	-	33.50	6.77	33.72			
PK	5.252G	116.05	Inf	-Inf	109.14	3	Vertical	346	1.79	-	33.80	6.86	33.75			
AV	5.2754G	105.18	Inf	-Inf	98.22	3	Vertical	346	1.79	-	33.85	6.86	33.75			
PK	5.3528G	67.91	74.00	-6.09	61.10	3	Vertical	346	1.79	-	33.71	6.87	33.77			
AV	5.3534G	53.28	54.00	-0.72	46.47	3	Vertical	346	1.79	-	33.71	6.87	33.77			

5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5270MHz_TX

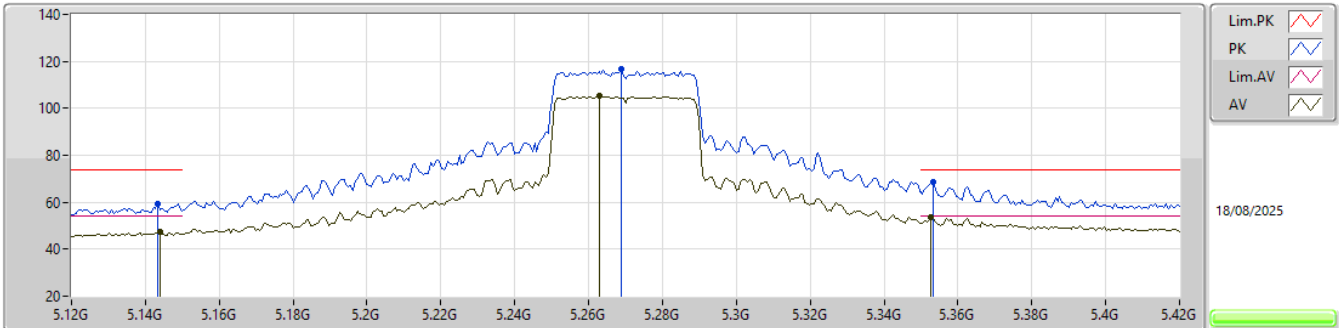


EUT Y_2TX
Setting 74
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1434G	59.27	74.00	-14.73	52.72	3	Horizontal	356	1.85	-	33.50	6.77	33.72			
AV	5.144G	47.24	54.00	-6.76	40.69	3	Horizontal	356	1.85	-	33.50	6.77	33.72			
PK	5.2688G	116.83	Inf	-Inf	109.88	3	Horizontal	356	1.85	-	33.84	6.86	33.75			
AV	5.2628G	105.44	Inf	-Inf	98.50	3	Horizontal	356	1.85	-	33.83	6.86	33.75			
PK	5.3534G	68.49	74.00	-5.51	61.68	3	Horizontal	356	1.85	-	33.71	6.87	33.77			
AV	5.3528G	53.86	54.00	-0.14	47.05	3	Horizontal	356	1.85	-	33.71	6.87	33.77			

5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5270MHz_TX

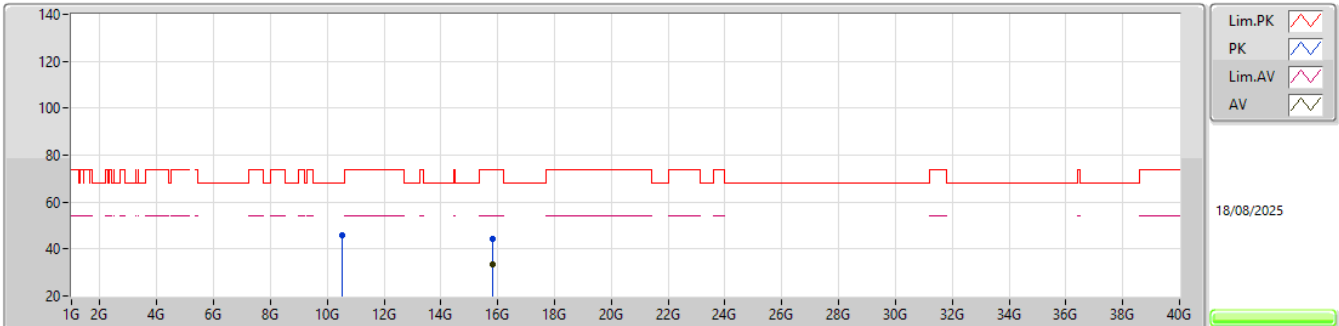


EUT_Y_2TX
Setting 74
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.54606G	45.93	68.20	-22.27	62.00	3	Vertical	252	2.37	-	39.48	11.13	66.68			
PK	15.82164G	44.12	74.00	-29.88	55.54	3	Vertical	236	2.38	-	39.21	13.30	63.93			
AV	15.81666G	33.66	54.00	-20.34	45.07	3	Vertical	236	2.38	-	39.23	13.29	63.93			

5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5270MHz_TX

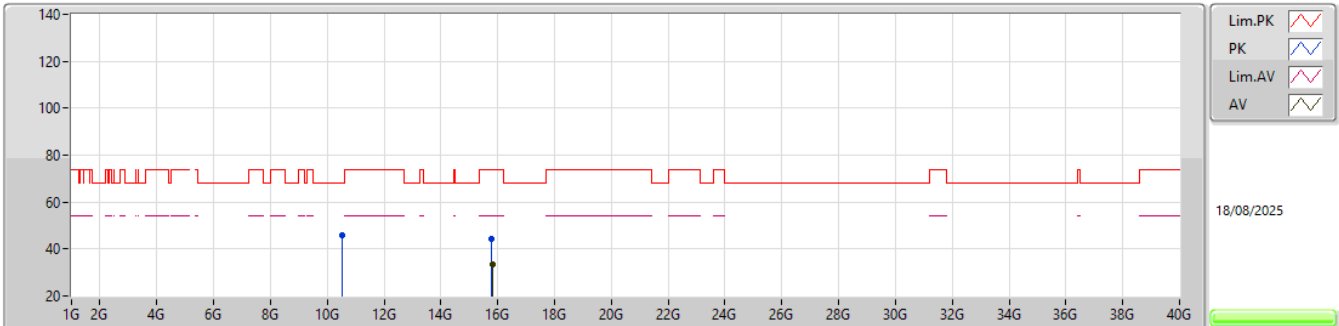


EUT_Y_2TX
Setting 74
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.54318G	45.64	68.20	-22.56	61.72	3	Horizontal	339	1.00	-	39.47	11.13	66.68			
PK	15.79956G	44.06	74.00	-29.94	55.40	3	Horizontal	0	1.93	-	39.30	13.28	63.92			
AV	15.81732G	33.58	54.00	-20.42	44.99	3	Horizontal	0	1.93	-	39.23	13.29	63.93			

5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5310MHz_TX

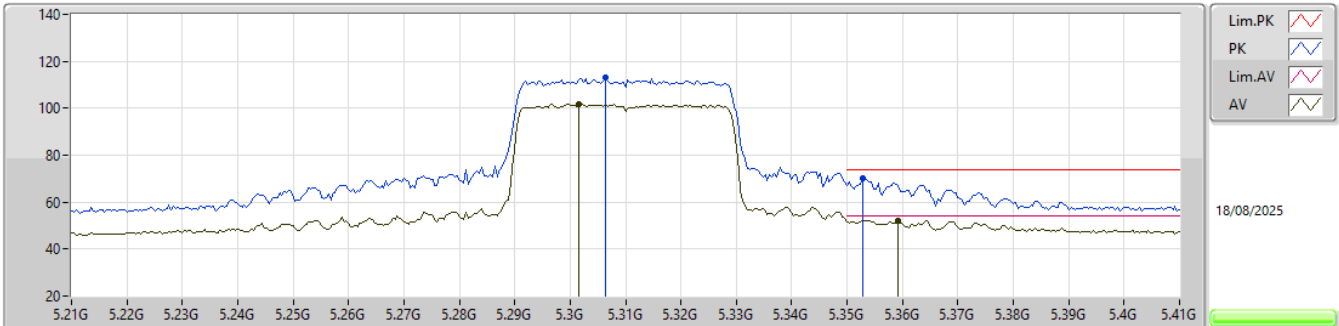


EUT_Y_2TX
Setting 63
06-E-R-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3064G	112.96	Inf	-Inf	105.98	3	Vertical	0	1.80	-	33.87	6.87	33.76				
AV	5.3016G	101.62	Inf	-Inf	94.62	3	Vertical	0	1.80	-	33.89	6.87	33.76				
PK	5.3528G	70.19	74.00	-3.81	63.38	3	Vertical	0	1.80	-	33.71	6.87	33.77				
AV	5.3592G	52.16	54.00	-1.84	45.32	3	Vertical	0	1.80	-	33.74	6.87	33.77				

5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5310MHz_TX

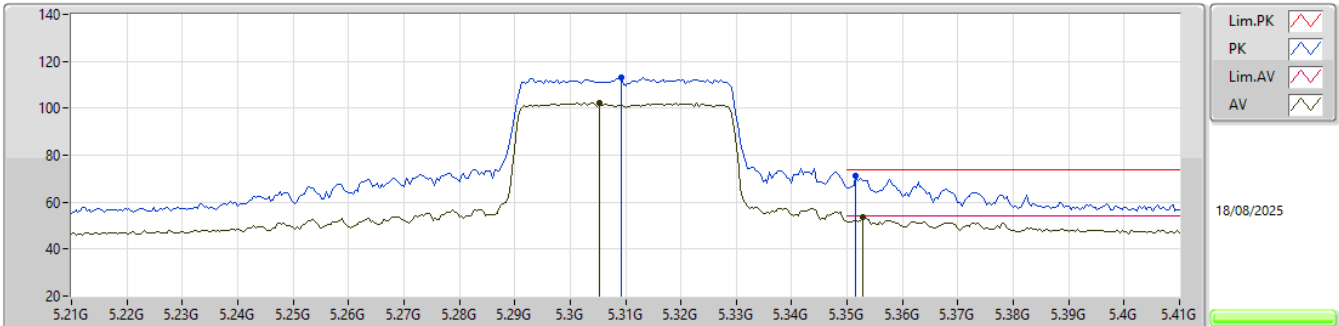


EUT_Y_2TX
Setting 63
06-E-R-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3092G	113.06	Inf	-Inf	106.09	3	Horizontal	354	1.87	-	33.86	6.87	33.76				
AV	5.3052G	102.24	Inf	-Inf	95.25	3	Horizontal	354	1.87	-	33.88	6.87	33.76				
PK	5.3516G	70.98	74.00	-3.02	64.17	3	Horizontal	354	1.87	-	33.71	6.87	33.77				
AV	5.3528G	53.76	54.00	-0.24	46.95	3	Horizontal	354	1.87	-	33.71	6.87	33.77				

5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5310MHz_TX

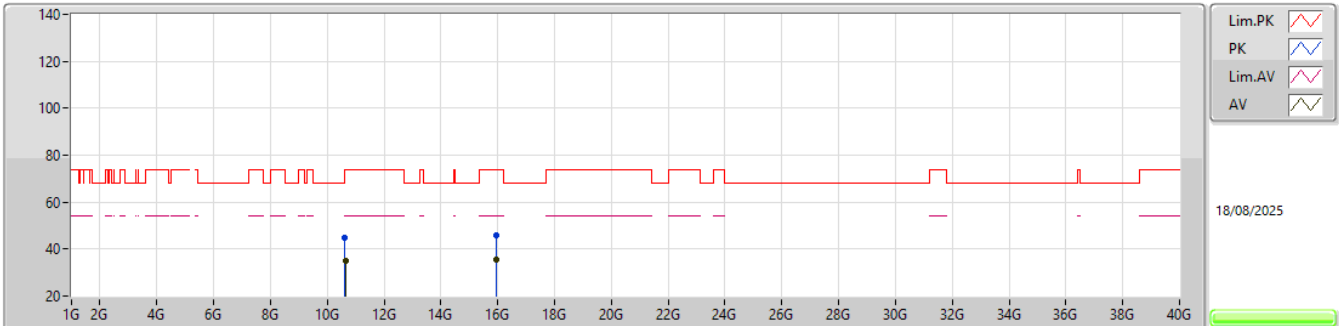


EUT Y_2TX
Setting 63
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.62906G	44.95	74.00	-29.05	60.81	3	Vertical	83	1.61	-	39.54	11.19	66.59			
AV	10.63482G	34.87	54.00	-19.13	50.73	3	Vertical	83	1.61	-	39.53	11.19	66.58			
PK	15.9396G	45.70	74.00	-28.30	57.24	3	Vertical	218	2.39	-	39.06	13.38	63.98			
AV	15.9405G	35.26	54.00	-18.74	46.80	3	Vertical	218	2.39	-	39.06	13.38	63.98			

5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5310MHz_TX

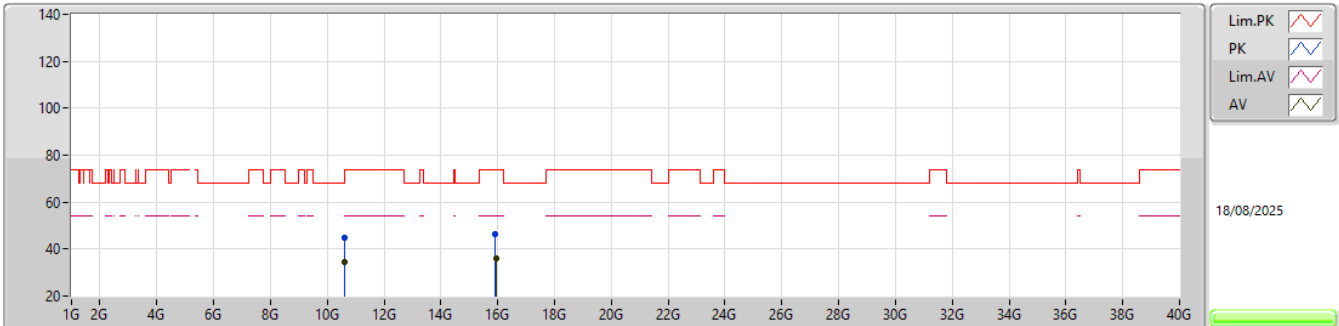


EUT_Y_2TX
Setting 63
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.62972G	44.99	74.00	-29.01	60.85	3	Horizontal	179	2.25	-	39.54	11.19	66.59			
AV	10.62954G	34.55	54.00	-19.45	50.41	3	Horizontal	179	2.25	-	39.54	11.19	66.59			
PK	15.92892G	46.49	74.00	-27.51	58.07	3	Horizontal	337	1.33	-	39.02	13.37	63.97			
AV	15.94452G	35.80	54.00	-18.20	47.32	3	Horizontal	337	1.33	-	39.08	13.38	63.98			

5.25-5.35GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5290MHz_TX

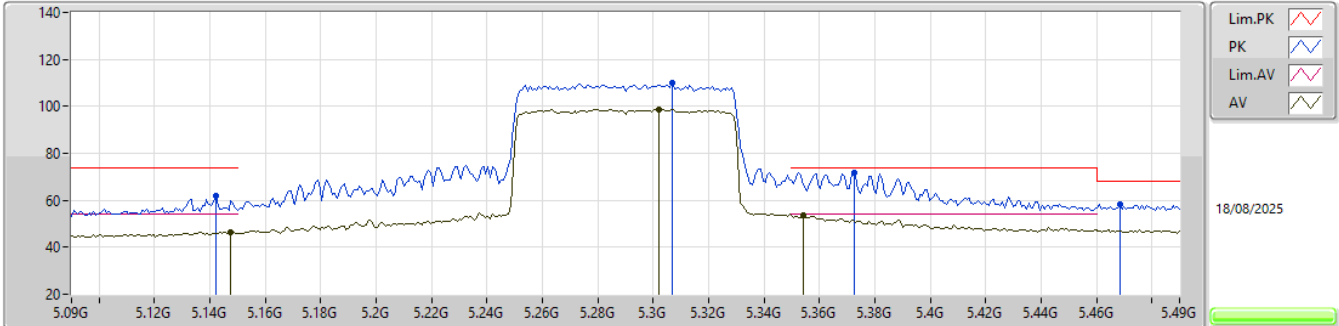


EUT_Y_2TX
Setting 64
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.142G	61.73	74.00	-12.27	55.18	3	Vertical	360.1	1.80	-	33.50	6.77	33.72
AV	5.1476G	46.36	54.00	-7.64	39.81	3	Vertical	360.1	1.80	-	33.50	6.77	33.72
PK	5.3068G	110.03	Inf	-Inf	103.05	3	Vertical	360.1	1.80	-	33.87	6.87	33.76
AV	5.302G	98.74	Inf	-Inf	91.74	3	Vertical	360.1	1.80	-	33.89	6.87	33.76
PK	5.3724G	71.98	74.00	-2.02	65.09	3	Vertical	360.1	1.80	-	33.79	6.88	33.78
AV	5.354G	53.75	54.00	-0.25	46.93	3	Vertical	360.1	1.80	-	33.72	6.87	33.77
PK	5.4684G	58.42	68.20	-9.78	51.47	3	Vertical	360.1	1.80	-	33.86	6.89	33.80

5.25-5.35GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5290MHz_TX

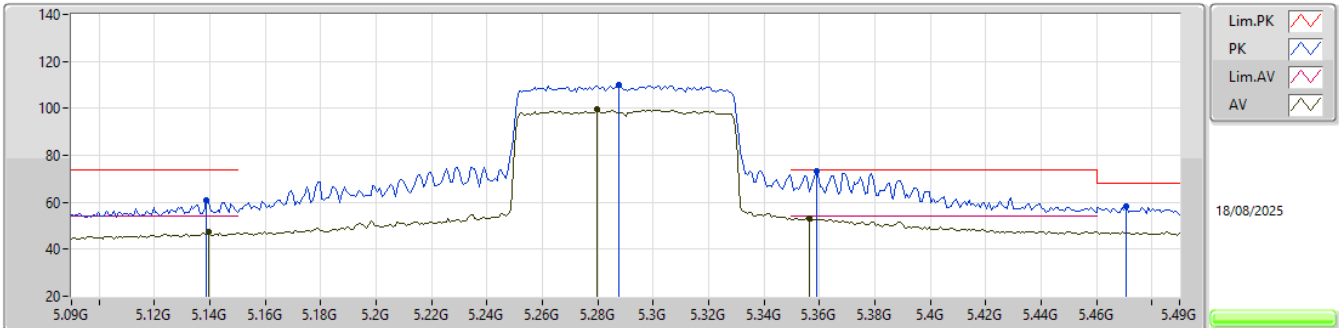


EUT_Y_2TX
Setting 64
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1388G	60.68	74.00	-13.32	54.14	3	Horizontal	345.9	1.80	-	33.50	6.76	33.72			
AV	5.1396G	47.20	54.00	-6.80	40.66	3	Horizontal	345.9	1.80	-	33.50	6.76	33.72			
PK	5.2876G	109.82	Inf	-Inf	102.83	3	Horizontal	345.9	1.80	-	33.88	6.86	33.75			
AV	5.2796G	99.53	Inf	-Inf	92.56	3	Horizontal	345.9	1.80	-	33.86	6.86	33.75			
PK	5.3588G	73.10	74.00	-0.90	66.26	3	Horizontal	345.9	1.80	-	33.74	6.87	33.77			
AV	5.3564G	52.99	54.00	-1.01	46.16	3	Horizontal	345.9	1.80	-	33.73	6.87	33.77			
PK	5.4708G	58.29	68.20	-9.91	51.34	3	Horizontal	345.9	1.80	-	33.86	6.89	33.80			

5.25-5.35GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5290MHz_TX

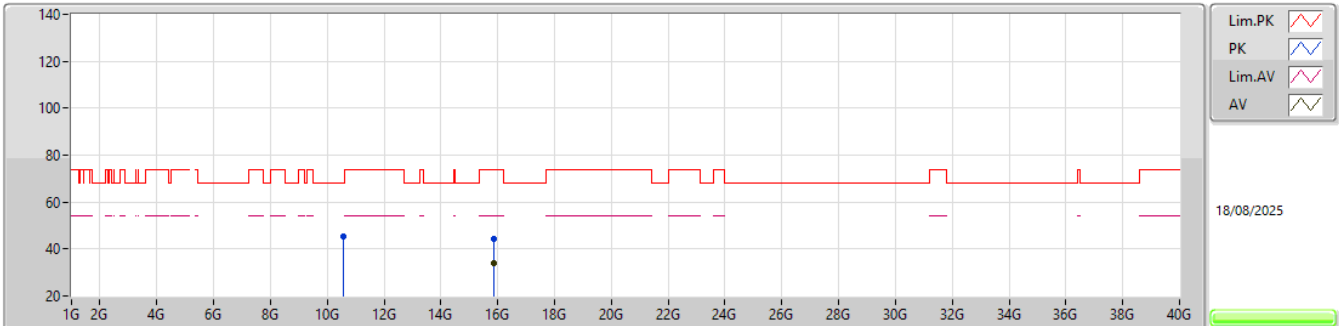


EUT_Y_2TX
Setting 64
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.56842G	45.20	68.20	-23.00	61.17	3	Vertical	276	2.73	-	39.54	11.15	66.66			
PK	15.86514G	44.42	74.00	-29.58	56.00	3	Vertical	7	1.14	-	39.04	13.33	63.95			
AV	15.8811G	33.77	54.00	-20.23	45.40	3	Vertical	7	1.14	-	38.98	13.34	63.95			

5.25-5.35GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5290MHz_TX

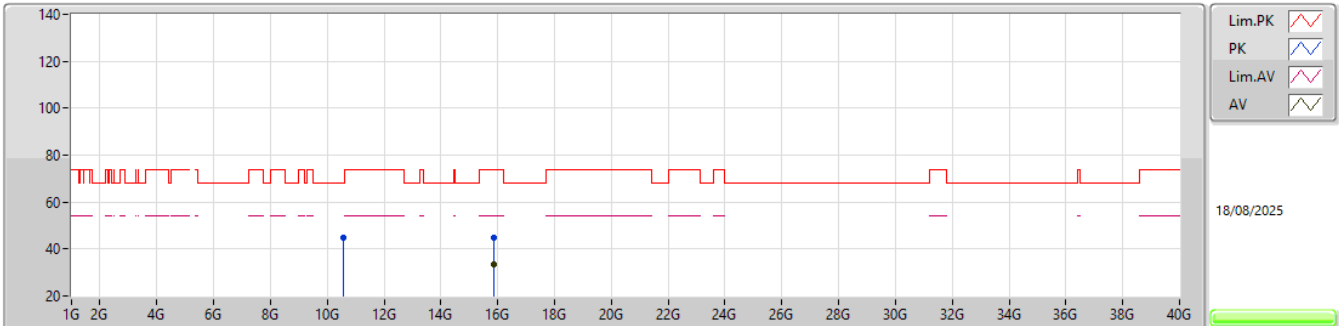


EUT_Y_2TX
Setting 64
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57502G	44.99	68.20	-23.21	60.94	3	Horizontal	33	2.39	-	39.55	11.15	66.65			
PK	15.8688G	45.04	74.00	-28.96	56.64	3	Horizontal	65	2.70	-	39.02	13.33	63.95			
AV	15.8751G	33.49	54.00	-20.51	45.11	3	Horizontal	65	2.70	-	39.00	13.33	63.95			

5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

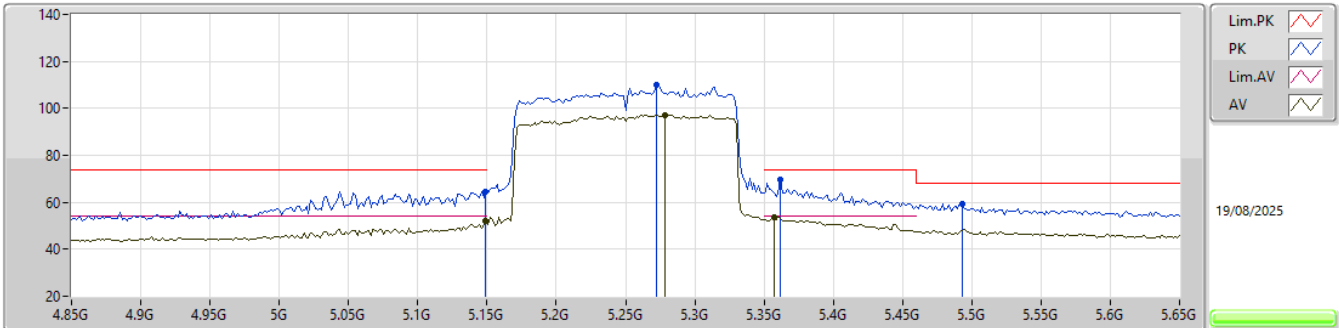


EUT_Y_2TX
Setting 68
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1492G	64.53	74.00	-9.47	57.97	3	Vertical	337	1.80	-	33.50	6.78	33.72			
AV	5.1492G	52.13	54.00	-1.87	45.57	3	Vertical	337	1.80	-	33.50	6.78	33.72			
PK	5.2724G	109.93	Inf	-Inf	102.98	3	Vertical	337	1.80	-	33.84	6.86	33.75			
AV	5.2788G	97.15	Inf	-Inf	90.18	3	Vertical	337	1.80	-	33.86	6.86	33.75			
PK	5.362G	69.40	74.00	-4.60	62.55	3	Vertical	337	1.80	-	33.75	6.87	33.77			
AV	5.3572G	53.53	54.00	-0.47	46.70	3	Vertical	337	1.80	-	33.73	6.87	33.77			
PK	5.4932G	59.50	68.20	-8.70	52.61	3	Vertical	337	1.80	-	33.81	6.89	33.81			

5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

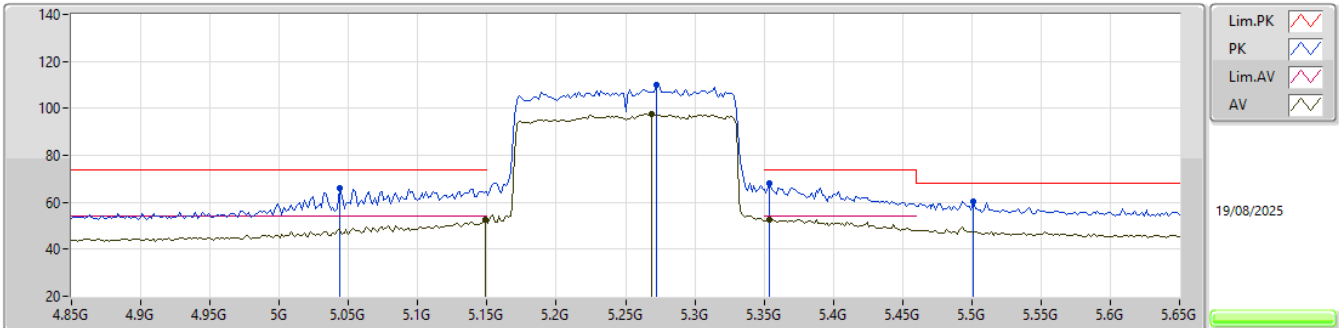


EUT_Y_2TX
Setting 68
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.0436G	65.83	74.00	-8.17	59.61	3	Horizontal	348	1.72	-	33.29	6.62	33.69			
AV	5.1492G	52.47	54.00	-1.53	45.91	3	Horizontal	348	1.72	-	33.50	6.78	33.72			
PK	5.2724G	110.04	Inf	-Inf	103.09	3	Horizontal	348	1.72	-	33.84	6.86	33.75			
AV	5.2692G	97.54	Inf	-Inf	90.59	3	Horizontal	348	1.72	-	33.84	6.86	33.75			
PK	5.354G	68.11	74.00	-5.89	61.29	3	Horizontal	348	1.72	-	33.72	6.87	33.77			
AV	5.354G	52.62	54.00	-1.38	45.80	3	Horizontal	348	1.72	-	33.72	6.87	33.77			
PK	5.5012G	60.37	68.20	-7.83	53.48	3	Horizontal	348	1.72	-	33.80	6.90	33.81			

5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

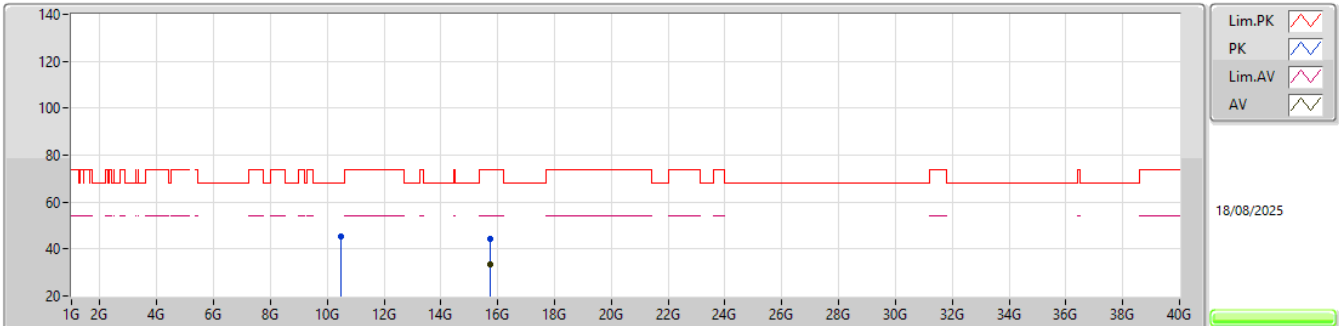


EUT_Y_2TX
Setting 68
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49796G	45.54	68.20	-22.66	61.87	3	Vertical	80	2.61	-	39.30	11.10	66.73			
PK	15.74226G	44.10	74.00	-29.90	55.61	3	Vertical	81	1.40	-	39.15	13.24	63.90			
AV	15.73638G	33.66	54.00	-20.34	45.20	3	Vertical	81	1.40	-	39.12	13.24	63.90			

5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

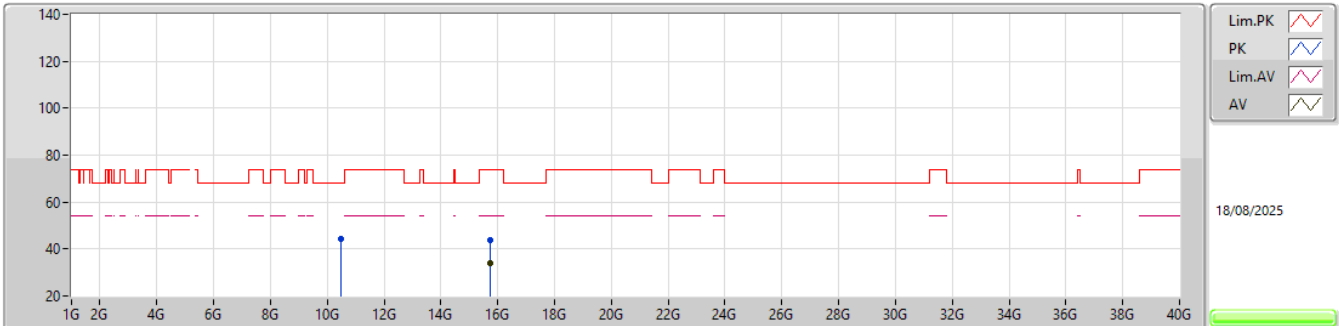


EUT_Y_2TX
Setting 68
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50078G	44.20	68.20	-24.00	60.52	3	Horizontal	106	1.35	-	39.30	11.11	66.73			
PK	15.7395G	43.91	74.00	-30.09	55.43	3	Horizontal	48	1.54	-	39.14	13.24	63.90			
AV	15.7473G	33.75	54.00	-20.25	45.23	3	Horizontal	48	1.54	-	39.18	13.24	63.90			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

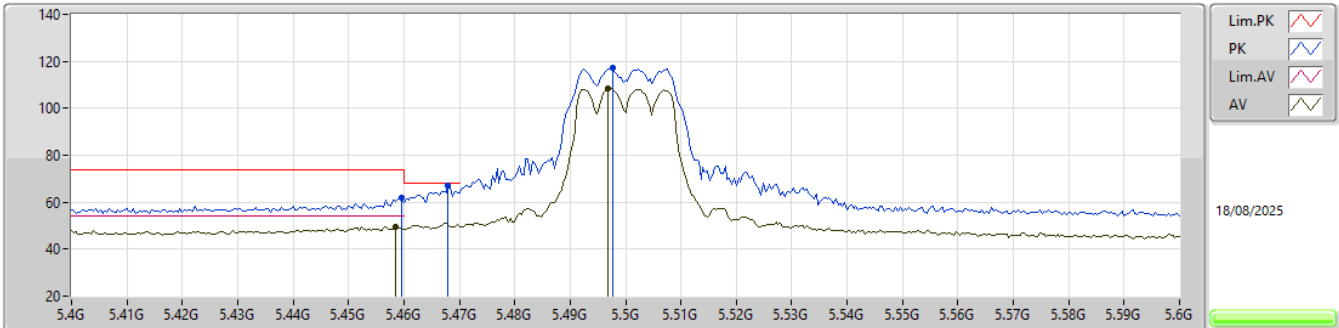


EUT_Y_2TX
Setting 67
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4596G	62.11	74.00	-11.89	55.14	3	Vertical	9	1.75	-	33.88	6.89	33.80			
AV	5.4584G	49.35	54.00	-4.65	42.38	3	Vertical	9	1.75	-	33.88	6.89	33.80			
PK	5.468G	67.19	68.20	-1.01	60.24	3	Vertical	9	1.75	-	33.86	6.89	33.80			
PK	5.4976G	117.29	Inf	-Inf	110.41	3	Vertical	9	1.75	-	33.80	6.89	33.81			
AV	5.4968G	108.30	Inf	-Inf	101.41	3	Vertical	9	1.75	-	33.81	6.89	33.81			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

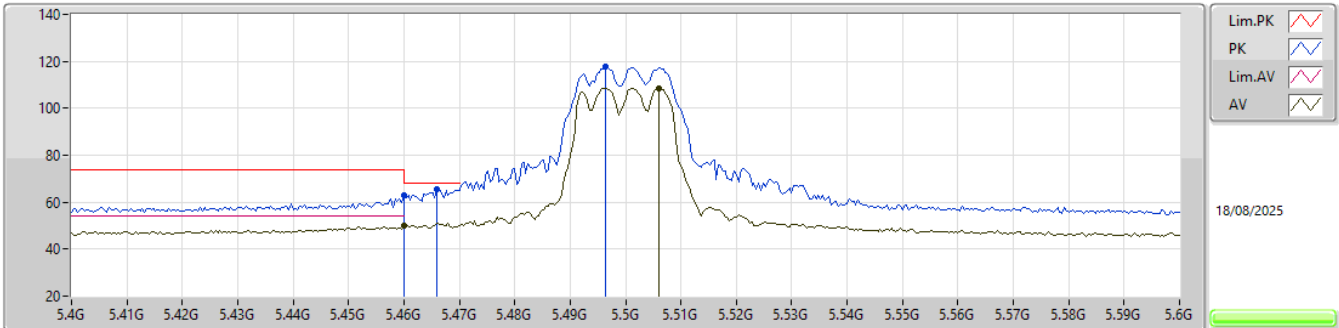


EUT Y_2TX
Setting 67
06-E-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.46G	62.72	74.00	-11.28	55.75	3	Horizontal	3	1.80	-	33.88	6.89	33.80			
AV	5.46G	49.92	54.00	-4.08	42.95	3	Horizontal	3	1.80	-	33.88	6.89	33.80			
PK	5.466G	65.52	68.20	-2.68	58.56	3	Horizontal	3	1.80	-	33.87	6.89	33.80			
PK	5.4964G	117.60	Inf	-Inf	110.71	3	Horizontal	3	1.80	-	33.81	6.89	33.81			
AV	5.506G	108.50	Inf	-Inf	101.61	3	Horizontal	3	1.80	-	33.80	6.90	33.81			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

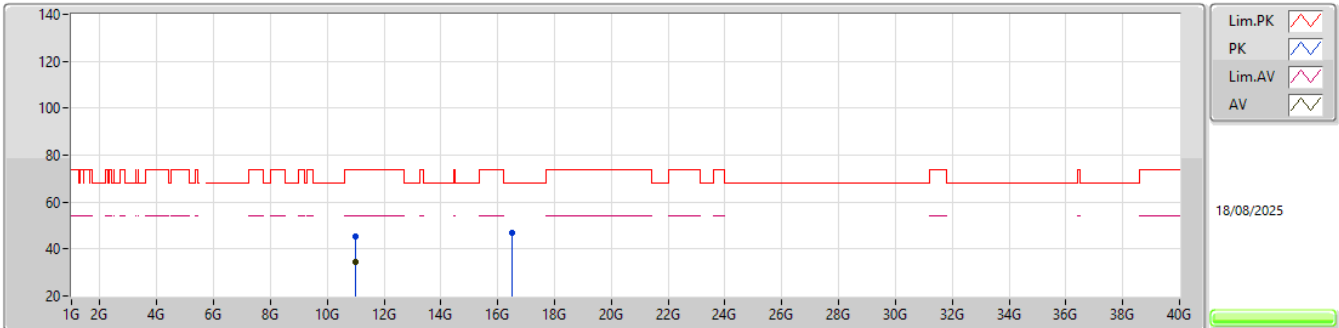EUT_Y_2TX
Setting 67
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00186G	45.40	74.00	-28.60	60.66	3	Vertical	343	2.00	-	39.50	11.43	66.19			
AV	10.9997G	34.39	54.00	-19.61	49.65	3	Vertical	343	2.00	-	39.50	11.43	66.19			
PK	16.50432G	46.78	68.20	-21.42	57.41	3	Vertical	309	1.26	-	39.52	13.59	63.74			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

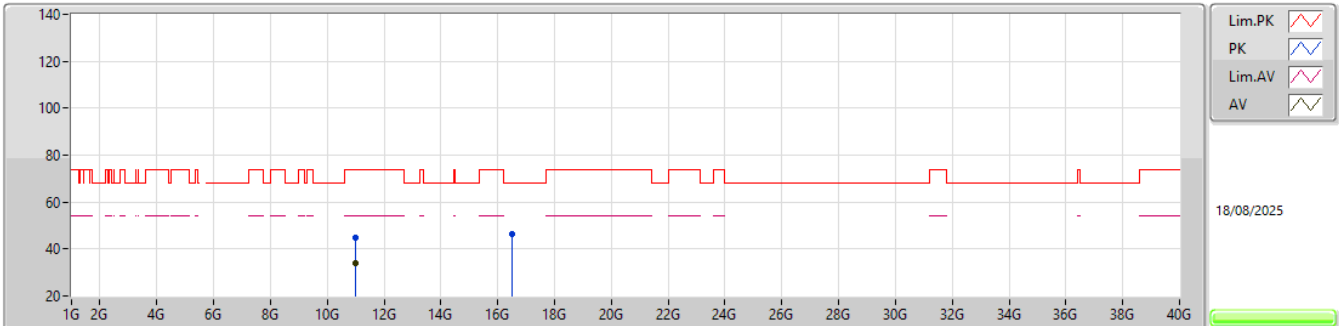EUT_Y_2TX
Setting 67
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00528G	44.70	74.00	-29.30	59.95	3	Horizontal	24	2.13	-	39.51	11.43	66.19			
AV	10.98656G	33.84	54.00	-20.16	49.12	3	Horizontal	24	2.13	-	39.50	11.42	66.20			
PK	16.50378G	46.54	68.20	-21.66	57.17	3	Horizontal	331	1.27	-	39.52	13.59	63.74			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

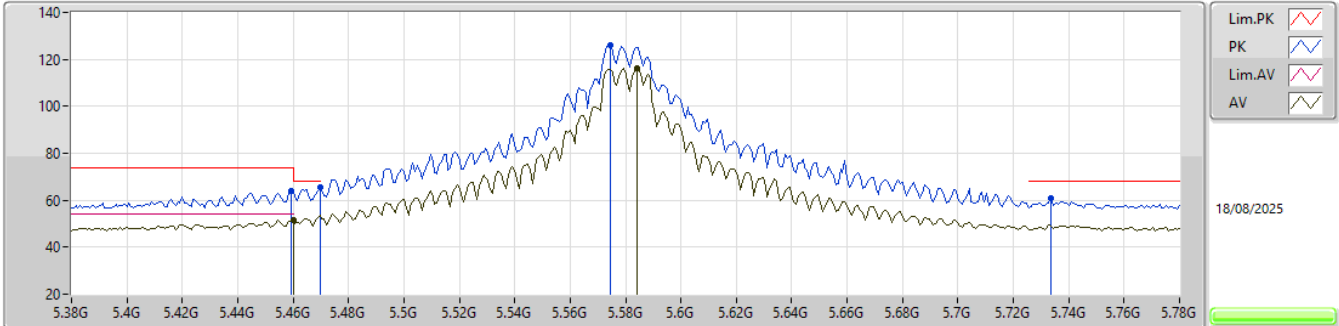


EUT Y_2TX
Setting 106
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4592G	64.12	74.00	-9.88	57.15	3	Vertical	1	1.80	-	33.88	6.89	33.80			
AV	5.46G	51.68	54.00	-2.32	44.71	3	Vertical	1	1.80	-	33.88	6.89	33.80			
PK	5.4696G	65.68	68.20	-2.52	58.73	3	Vertical	1	1.80	-	33.86	6.89	33.80			
PK	5.5744G	126.26	Inf	-Inf	119.45	3	Vertical	1	1.80	-	33.70	6.91	33.80			
AV	5.584G	116.32	Inf	-Inf	109.55	3	Vertical	1	1.80	-	33.66	6.91	33.80			
PK	5.7336G	60.75	68.20	-7.45	53.77	3	Vertical	1	1.80	-	33.67	7.09	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

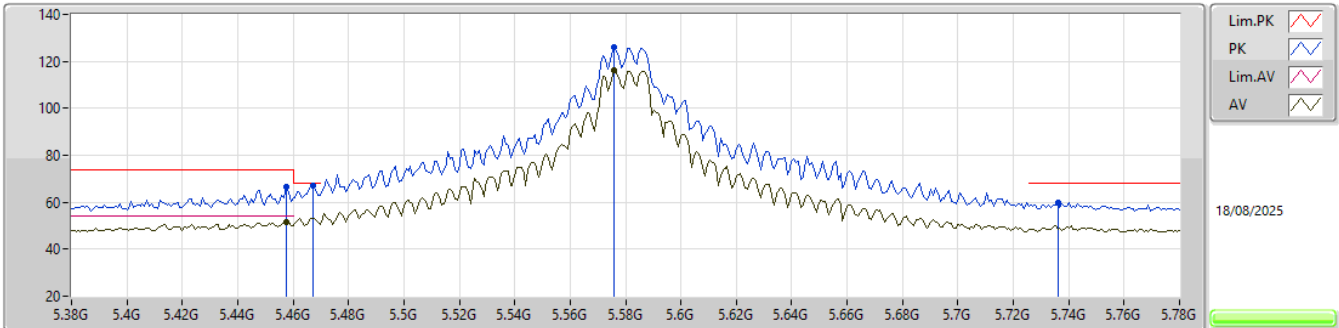


EUT_Y_2TX
Setting 106
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4576G	66.44	74.00	-7.56	59.47	3	Horizontal	345	1.80	-	33.88	6.89	33.80			
AV	5.4576G	51.57	54.00	-2.43	44.60	3	Horizontal	345	1.80	-	33.88	6.89	33.80			
PK	5.4672G	66.82	68.20	-1.38	59.86	3	Horizontal	345	1.80	-	33.87	6.89	33.80			
PK	5.576G	125.97	Inf	-Inf	119.16	3	Horizontal	345	1.80	-	33.70	6.91	33.80			
AV	5.576G	116.19	Inf	-Inf	109.38	3	Horizontal	345	1.80	-	33.70	6.91	33.80			
PK	5.736G	59.86	68.20	-8.34	52.88	3	Horizontal	345	1.80	-	33.67	7.09	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5580MHz_TX

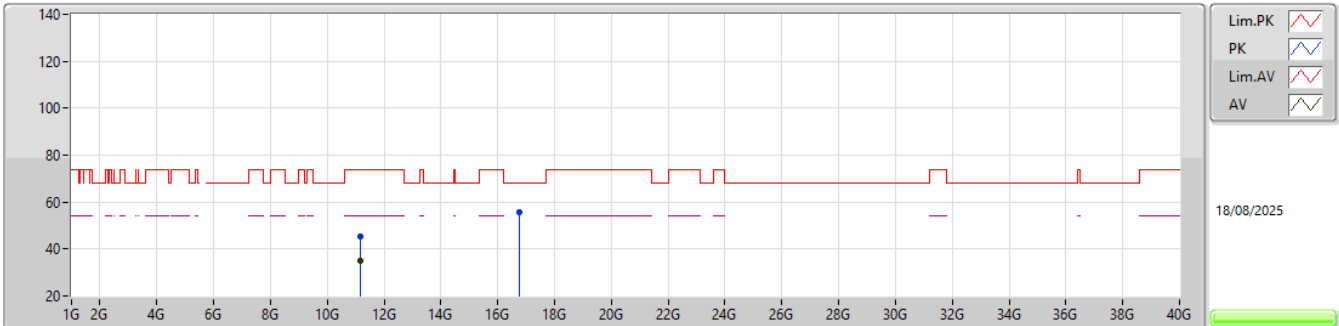EUT_Y_2TX
Setting 106
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14848G	45.26	74.00	-28.74	60.22	3	Vertical	250	1.80	-	39.70	11.53	66.19			
AV	11.14956G	34.80	54.00	-19.20	49.76	3	Vertical	250	1.80	-	39.70	11.53	66.19			
PK	16.74522G	55.50	68.20	-12.70	65.56	3	Vertical	340	1.88	-	40.28	13.67	64.01			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5580MHz_TX

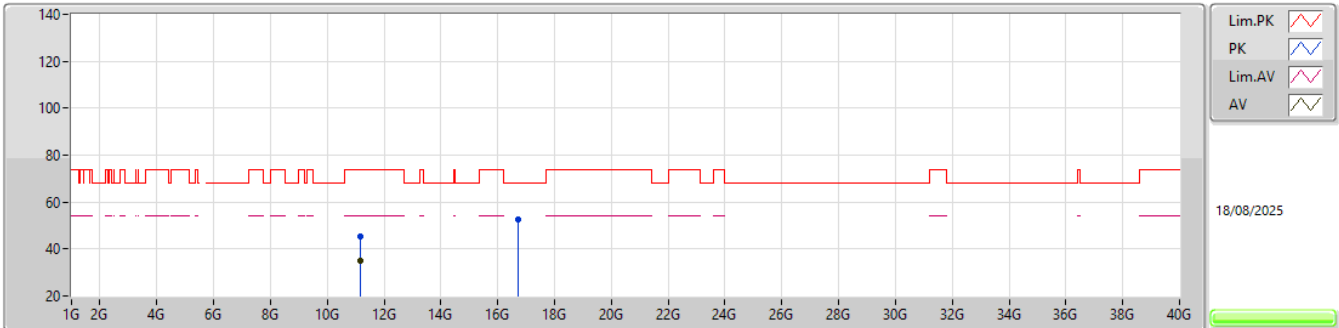EUT_Y_2TX
Setting 106
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.17038G	45.54	74.00	-28.46	60.45	3	Horizontal	358	1.80	-	39.74	11.54	66.19			
AV	11.1489G	34.87	54.00	-19.13	49.83	3	Horizontal	358	1.80	-	39.70	11.53	66.19			
PK	16.73424G	52.33	68.20	-15.87	62.42	3	Horizontal	6	2.63	-	40.24	13.67	64.00			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

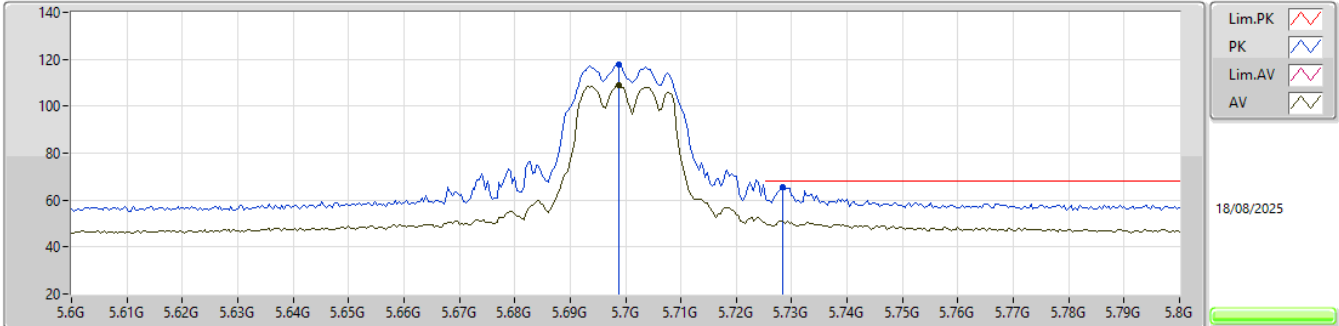


EUT_Y_2TX
Setting 69
06-E-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6988G	117.67	Inf	-Inf	110.82	3	Vertical	0	1.74	-	33.60	7.04	33.79				
AV	5.6988G	108.89	Inf	-Inf	102.04	3	Vertical	0	1.74	-	33.60	7.04	33.79				
PK	5.7284G	65.52	68.20	-2.68	58.56	3	Vertical	0	1.74	-	33.66	7.08	33.78				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5700MHz_TX

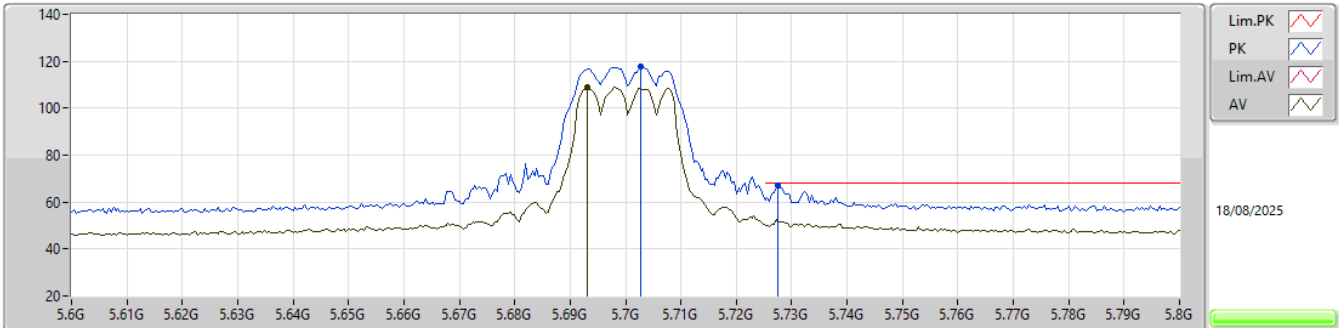EUT_Y_2TX
Setting 69
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7028G	117.85	Inf	-Inf	110.98	3	Horizontal	10	1.80	-	33.61	7.05	33.79			
AV	5.6932G	108.77	Inf	-Inf	101.93	3	Horizontal	10	1.80	-	33.59	7.04	33.79			
PK	5.7276G	67.13	68.20	-1.07	60.17	3	Horizontal	10	1.80	-	33.66	7.08	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5700MHz_TX

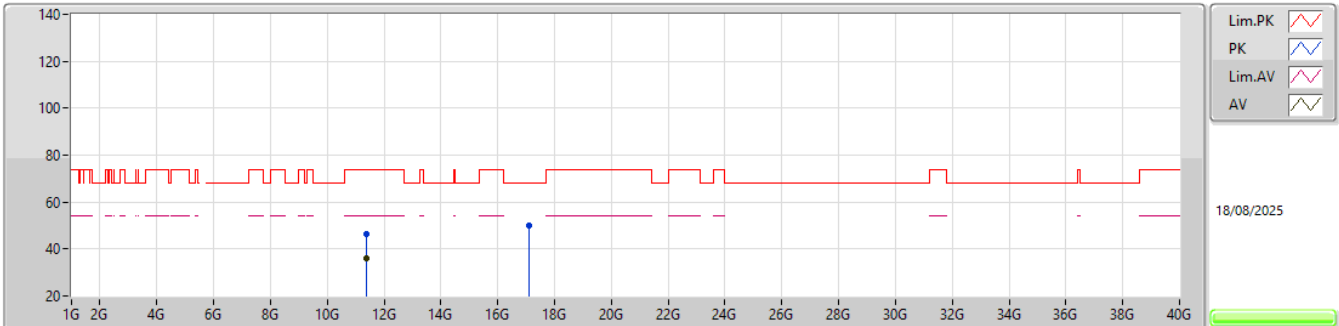EUT_Y_2TX
Setting 69
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39418G	46.57	74.00	-27.43	60.69	3	Vertical	316	2.31	-	40.39	11.69	66.20			
AV	11.39556G	36.05	54.00	-17.95	50.17	3	Vertical	316	2.31	-	40.39	11.69	66.20			
PK	17.10624G	50.03	68.20	-18.17	58.39	3	Vertical	286	2.25	-	42.12	13.80	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

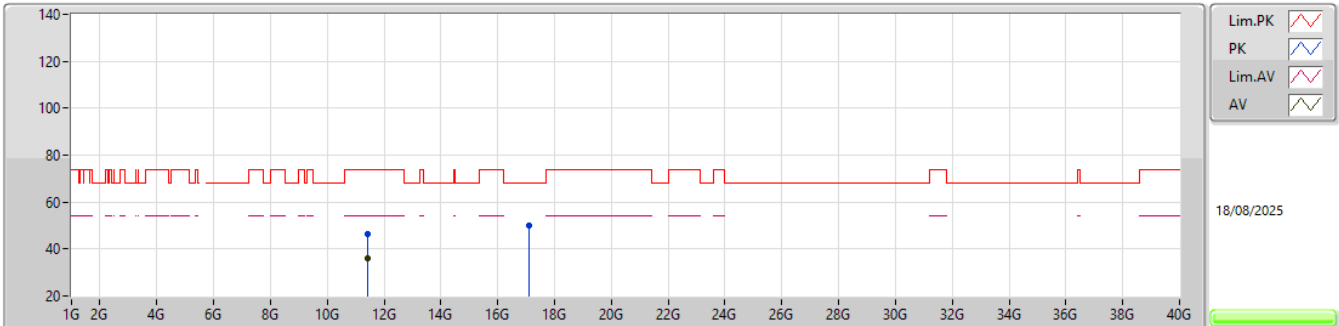


EUT_Y_2TX
Setting 69
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4018G	46.31	74.00	-27.69	60.42	3	Horizontal	193	1.87	-	40.40	11.69	66.20			
AV	11.41278G	35.96	54.00	-18.04	50.09	3	Horizontal	193	1.87	-	40.37	11.70	66.20			
PK	17.10336G	50.05	68.20	-18.15	58.42	3	Horizontal	195	1.86	-	42.11	13.80	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

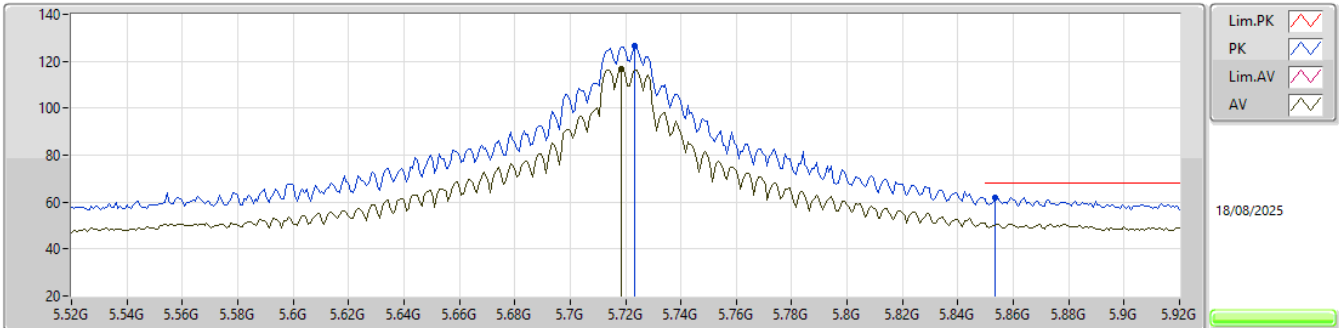


EUT_Y_2TX
Setting 108
06-E-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7232G	126.38	Inf	-Inf	119.43	3	Vertical	360	1.83	-	33.65	7.08	33.78			
AV	5.7184G	116.87	Inf	-Inf	109.94	3	Vertical	360	1.83	-	33.64	7.07	33.78			
PK	5.8536G	62.10	68.20	-6.10	54.74	3	Vertical	360	1.83	-	33.91	7.22	33.77			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

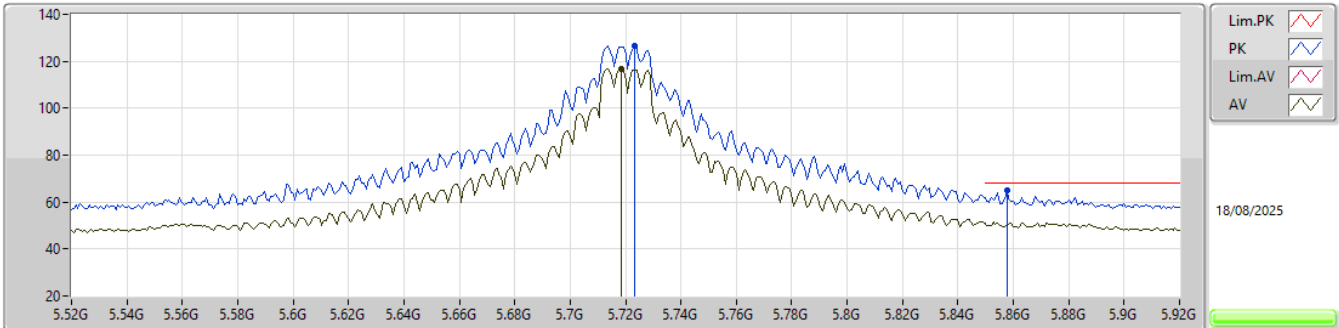


EUT_Y_2TX
Setting 108
06-E-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7232G	126.60	Inf	-Inf	119.65	3	Horizontal	9	1.89	-	33.65	7.08	33.78				
AV	5.7184G	116.90	Inf	-Inf	109.97	3	Horizontal	9	1.89	-	33.64	7.07	33.78				
PK	5.8576G	64.98	68.20	-3.22	57.60	3	Horizontal	9	1.89	-	33.93	7.22	33.77				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

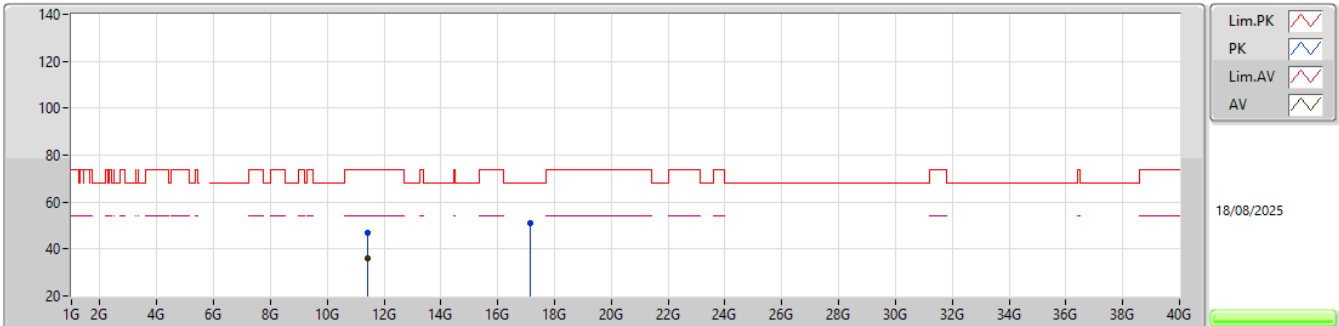


EUT_Y_2TX
Setting 108
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43202G	47.04	74.00	-26.96	61.19	3	Vertical	191	1.58	-	40.34	11.71	66.20			
AV	11.42524G	36.25	54.00	-17.75	50.39	3	Vertical	191	1.58	-	40.35	11.71	66.20			
PK	17.16546G	51.21	68.20	-16.99	59.37	3	Vertical	226	1.72	-	42.30	13.82	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

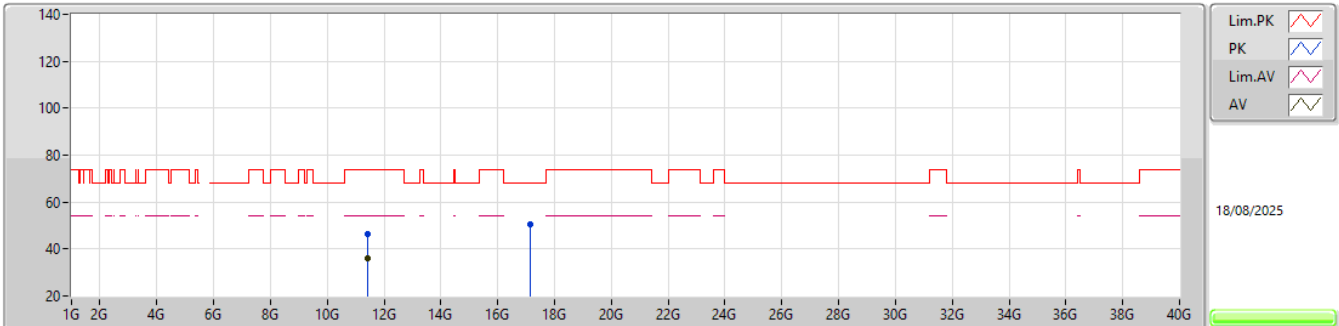


EUT_Y_2TX
Setting 108
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.42746G	46.53	74.00	-27.47	60.67	3	Horizontal	126	1.28	-	40.35	11.71	66.20			
AV	11.43334G	35.91	54.00	-18.09	50.07	3	Horizontal	126	1.28	-	40.33	11.71	66.20			
PK	17.15688G	50.47	68.20	-17.73	58.64	3	Horizontal	43	2.03	-	42.30	13.81	64.28			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5500MHz_TX

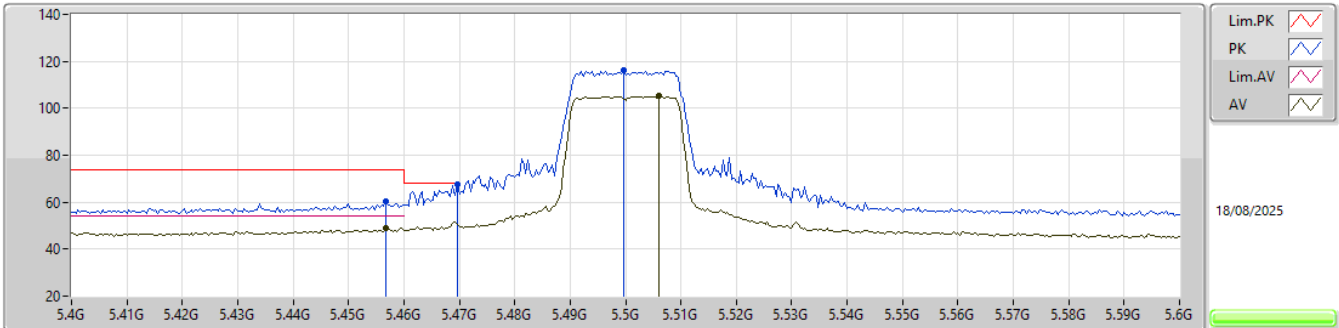


EUT_Y_2TX
Setting 61
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4568G	60.34	74.00	-13.66	53.36	3	Vertical	4	1.85	-	33.89	6.89	33.80			
AV	5.4568G	48.85	54.00	-5.15	41.87	3	Vertical	4	1.85	-	33.89	6.89	33.80			
PK	5.4696G	67.70	68.20	-0.50	60.75	3	Vertical	4	1.85	-	33.86	6.89	33.80			
PK	5.4996G	116.01	Inf	-Inf	109.13	3	Vertical	4	1.85	-	33.80	6.89	33.81			
AV	5.506G	105.32	Inf	-Inf	98.43	3	Vertical	4	1.85	-	33.80	6.90	33.81			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5500MHz_TX

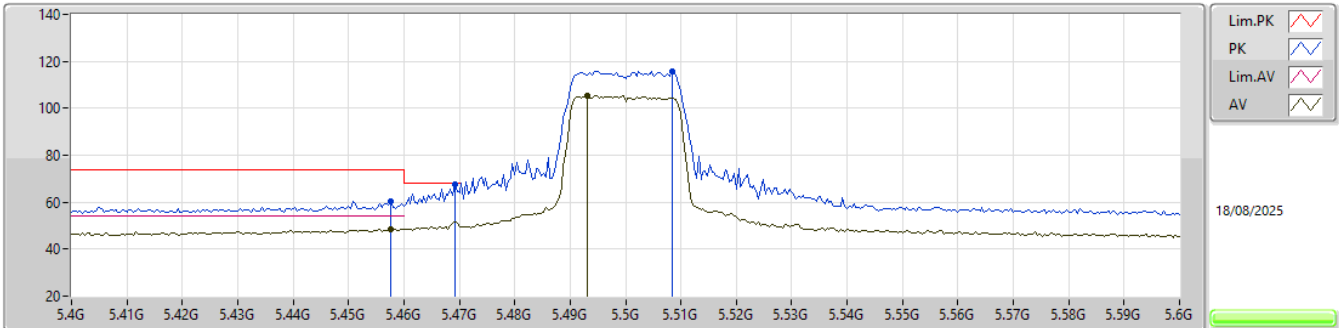


EUT_Y_2TX
Setting 61
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4576G	60.41	74.00	-13.59	53.44	3	Horizontal	360	1.80	-	33.88	6.89	33.80			
AV	5.4576G	48.40	54.00	-5.60	41.43	3	Horizontal	360	1.80	-	33.88	6.89	33.80			
PK	5.4692G	67.77	68.20	-0.43	60.82	3	Horizontal	360	1.80	-	33.86	6.89	33.80			
PK	5.5084G	115.88	Inf	-Inf	108.99	3	Horizontal	360	1.80	-	33.80	6.90	33.81			
AV	5.4932G	105.32	Inf	-Inf	98.43	3	Horizontal	360	1.80	-	33.81	6.89	33.81			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX


5500MHz_TX

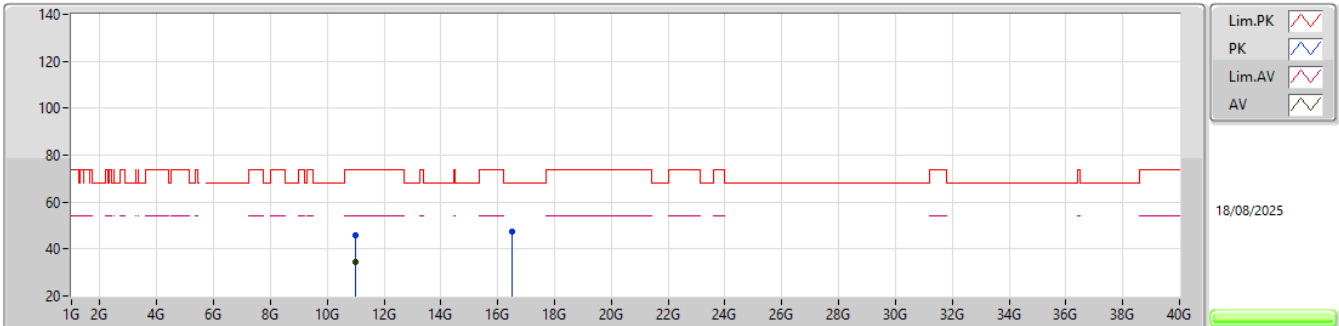EUT_Y_2TX
Setting 61
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.0072G	45.61	74.00	-28.39	60.86	3	Vertical	251	2.14	-	39.51	11.43	66.19			
AV	10.99994G	34.56	54.00	-19.44	49.82	3	Vertical	251	2.14	-	39.50	11.43	66.19			
PK	16.51374G	47.62	68.20	-20.58	58.24	3	Vertical	277	1.29	-	39.55	13.59	63.76			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX


5500MHz_TX

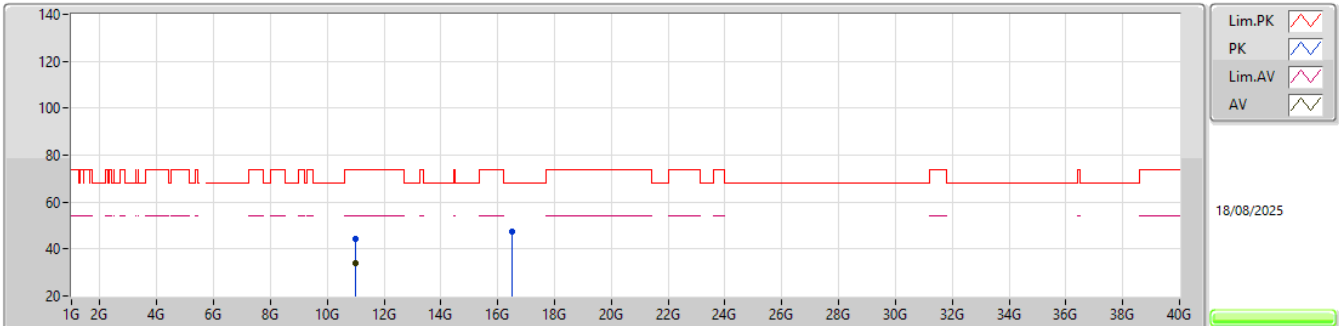EUT_Y_2TX
Setting 61
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01182G	44.38	74.00	-29.62	59.61	3	Horizontal	288	2.36	-	39.52	11.44	66.19			
AV	11.01128G	34.17	54.00	-19.83	49.40	3	Horizontal	288	2.36	-	39.52	11.44	66.19			
PK	16.51386G	47.61	68.20	-20.59	58.22	3	Horizontal	95	1.95	-	39.56	13.59	63.76			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5580MHz_TX

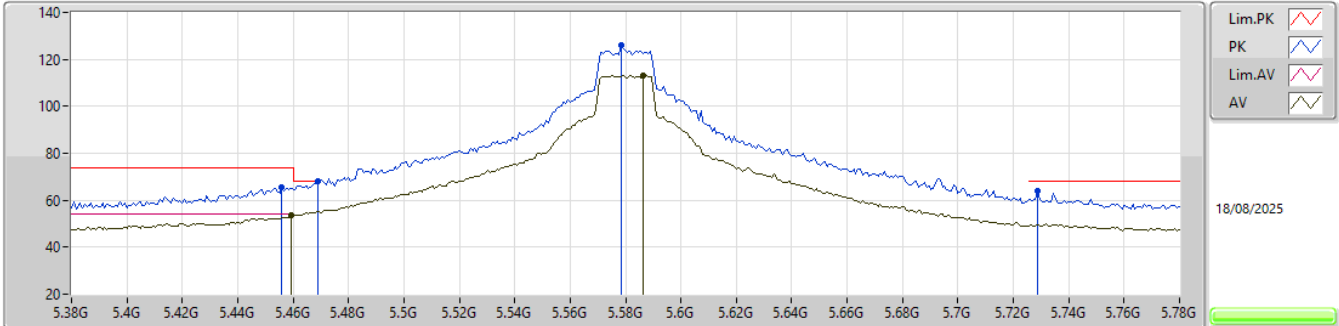


EUT_Y_2TX
Setting 103
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.456G	65.56	74.00	-8.44	58.58	3	Vertical	360	1.80	-	33.89	6.89	33.80			
AV	5.4592G	53.75	54.00	-0.25	46.78	3	Vertical	360	1.80	-	33.88	6.89	33.80			
PK	5.4688G	68.13	68.20	-0.07	61.18	3	Vertical	360	1.80	-	33.86	6.89	33.80			
PK	5.5784G	125.78	Inf	-Inf	118.98	3	Vertical	360	1.80	-	33.69	6.91	33.80			
AV	5.5864G	113.26	Inf	-Inf	106.50	3	Vertical	360	1.80	-	33.65	6.91	33.80			
PK	5.7288G	64.07	68.20	-4.13	57.11	3	Vertical	360	1.80	-	33.66	7.08	33.78			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5580MHz_TX

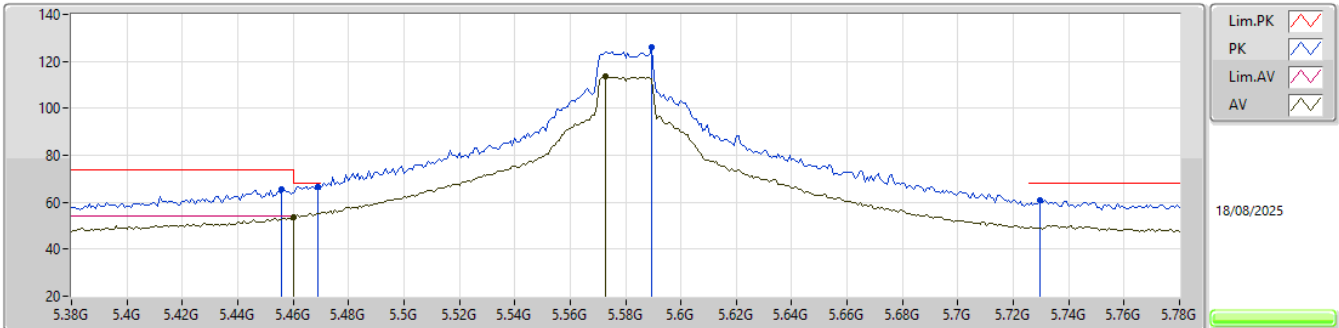


EUT_Y_2TX
Setting 103
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.456G	65.35	74.00	-8.65	58.37	3	Horizontal	343	1.80	-	33.89	6.89	33.80			
AV	5.46G	53.59	54.00	-0.41	46.62	3	Horizontal	343	1.80	-	33.88	6.89	33.80			
PK	5.4688G	66.65	68.20	-1.55	59.70	3	Horizontal	343	1.80	-	33.86	6.89	33.80			
PK	5.5896G	125.93	Inf	-Inf	119.18	3	Horizontal	343	1.80	-	33.64	6.91	33.80			
AV	5.5728G	113.86	Inf	-Inf	107.04	3	Horizontal	343	1.80	-	33.71	6.91	33.80			
PK	5.7296G	61.00	68.20	-7.20	54.04	3	Horizontal	343	1.80	-	33.66	7.08	33.78			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5580MHz_TX

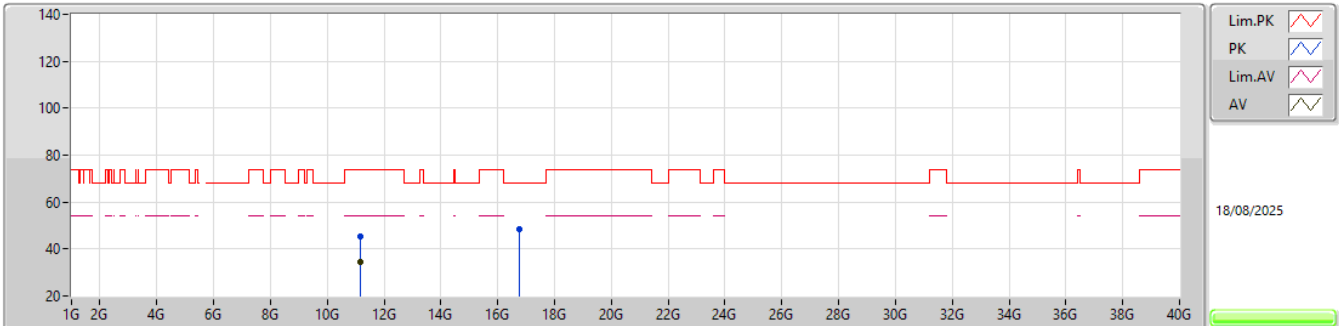


EUT_Y_2TX
Setting 103
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.17344G	45.33	74.00	-28.67	60.23	3	Vertical	162	1.75	-	39.75	11.54	66.19			
AV	11.14722G	34.60	54.00	-19.40	49.57	3	Vertical	162	1.75	-	39.69	11.53	66.19			
PK	16.75152G	48.29	68.20	-19.91	58.32	3	Vertical	297	2.01	-	40.31	13.68	64.02			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5580MHz_TX

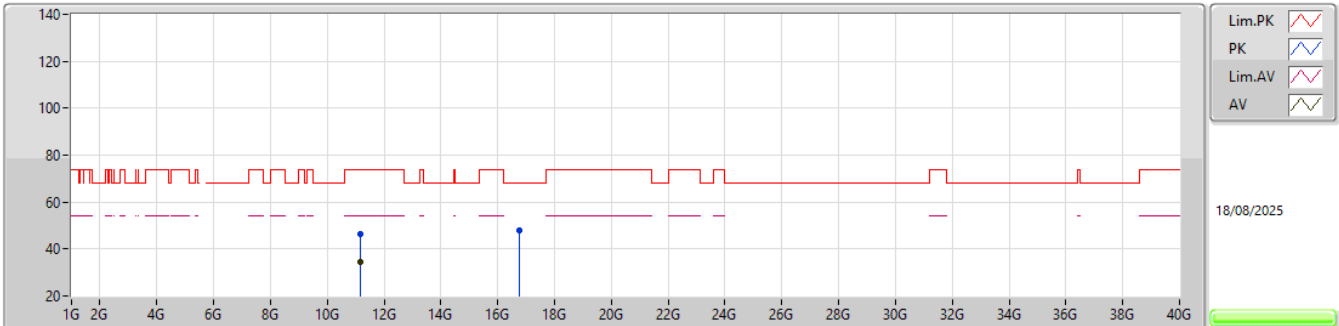


EUT_Y_2TX
Setting 103
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14806G	46.23	74.00	-27.77	61.19	3	Horizontal	26	1.88	-	39.70	11.53	66.19			
AV	11.15652G	34.31	54.00	-19.69	49.26	3	Horizontal	26	1.88	-	39.71	11.53	66.19			
PK	16.75218G	48.02	68.20	-20.18	58.05	3	Horizontal	260	2.02	-	40.31	13.68	64.02			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5700MHz_TX

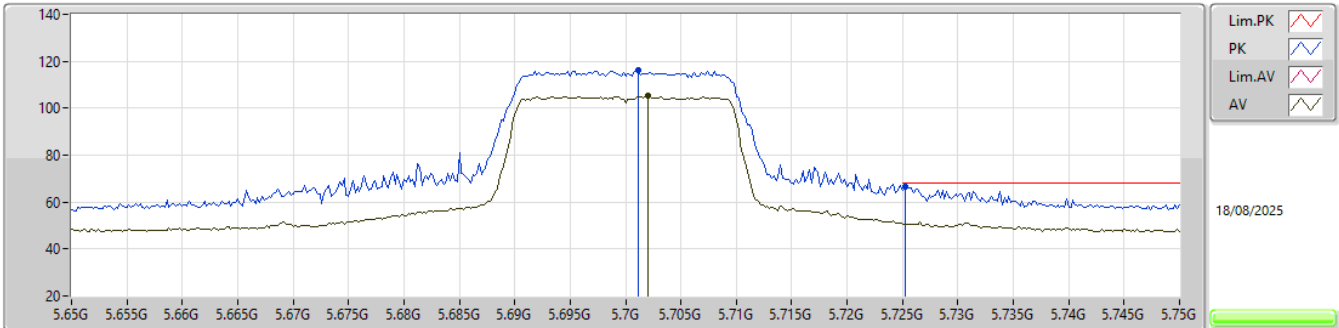


EUT_Y_2TX
Setting 63
06-E-R-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7012G	116.26	Inf	-Inf	109.40	3	Vertical	355	1.80	-	33.60	7.05	33.79			
AV	5.702G	105.42	Inf	-Inf	98.56	3	Vertical	355	1.80	-	33.60	7.05	33.79			
PK	5.7252G	66.74	68.20	-1.46	59.79	3	Vertical	355	1.80	-	33.65	7.08	33.78			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5700MHz_TX

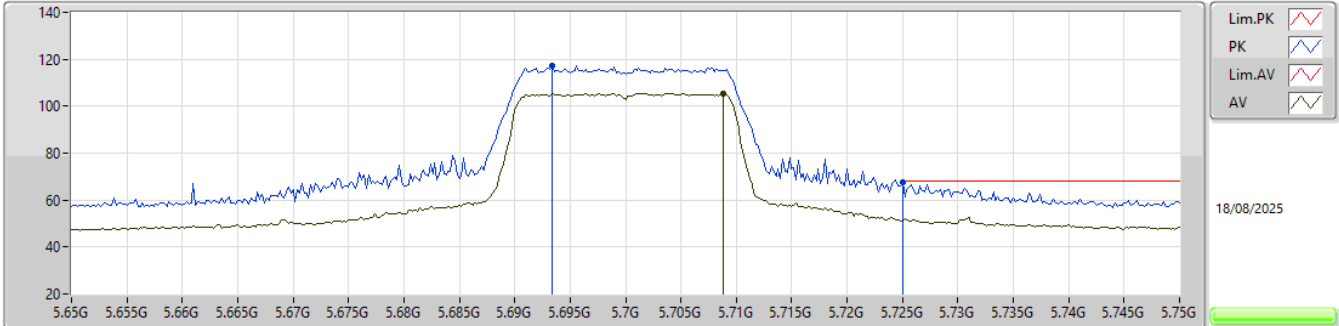


EUT_Y_2TX
Setting 63
06-E-R-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6934G	117.31	Inf	-Inf	110.47	3	Horizontal	7	1.87	-	33.59	7.04	33.79			
AV	5.7088G	105.59	Inf	-Inf	98.69	3	Horizontal	7	1.87	-	33.62	7.06	33.78			
PK	5.725G	67.73	68.20	-0.47	60.78	3	Horizontal	7	1.87	-	33.65	7.08	33.78			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX


5700MHz_TX

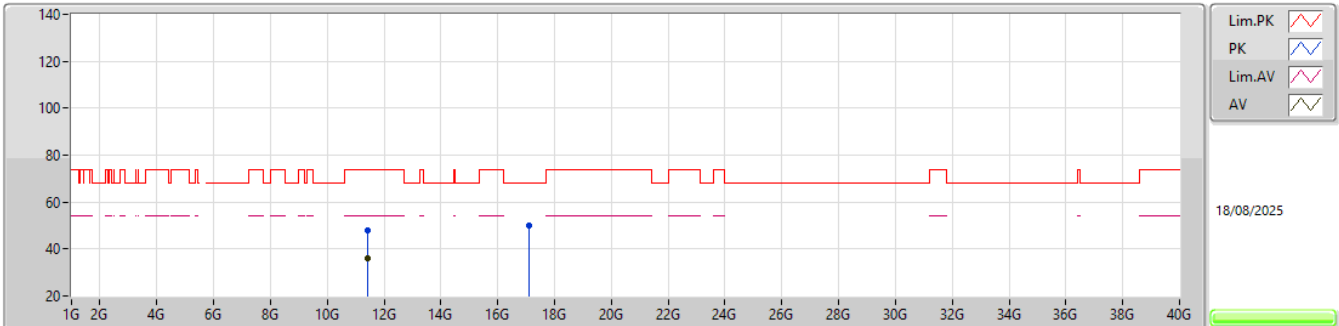EUT_Y_2TX
Setting 63
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40816G	47.83	74.00	-26.17	61.95	3	Vertical	204	2.47	-	40.38	11.70	66.20			
AV	11.4144G	36.10	54.00	-17.90	50.23	3	Vertical	204	2.47	-	40.37	11.70	66.20			
PK	17.09466G	49.99	68.20	-18.21	58.42	3	Vertical	285	1.59	-	42.06	13.79	64.28			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX


5700MHz_TX

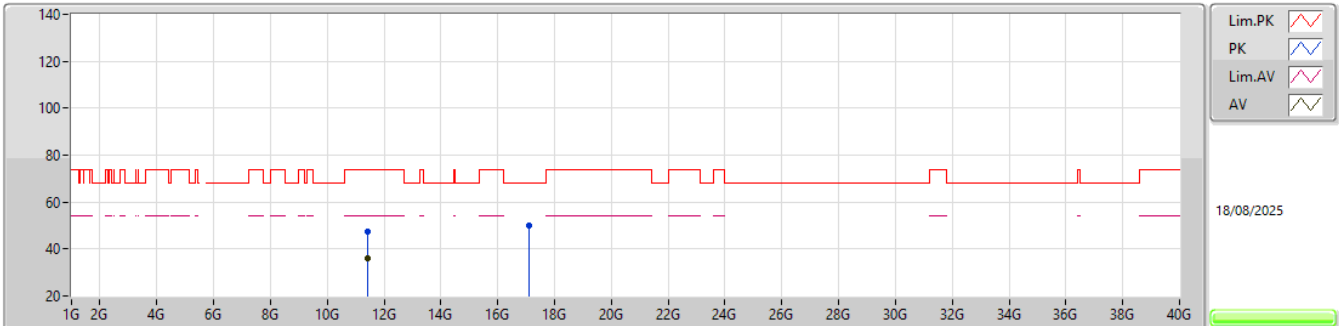EUT_Y_2TX
Setting 63
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4147G	47.28	74.00	-26.72	61.41	3	Horizontal	38	2.71	-	40.37	11.70	66.20			
AV	11.41188G	35.91	54.00	-18.09	50.03	3	Horizontal	38	2.71	-	40.38	11.70	66.20			
PK	17.09262G	50.25	68.20	-17.95	58.70	3	Horizontal	93	1.22	-	42.04	13.79	64.28			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

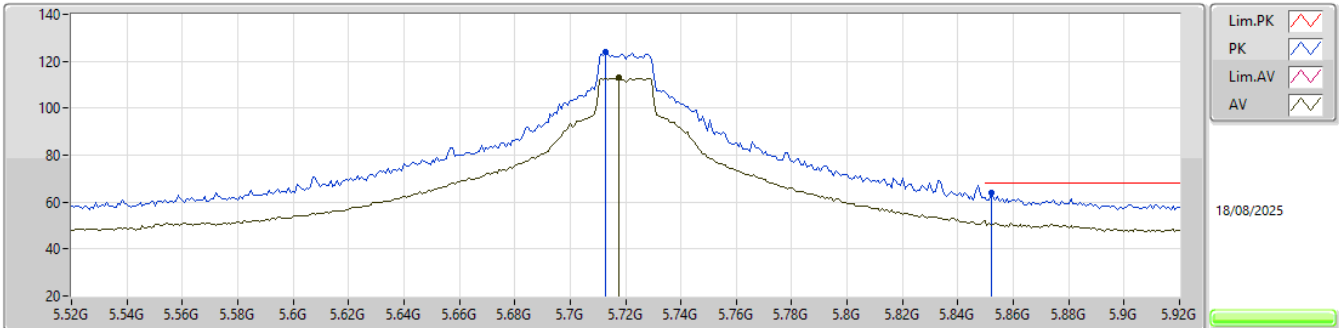


EUT_Y_2TX
Setting 108
06-E-R-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7128G	123.89	Inf	-Inf	116.98	3	Vertical	360	1.80	-	33.63	7.06	33.78			
AV	5.7176G	112.97	Inf	-Inf	106.04	3	Vertical	360	1.80	-	33.64	7.07	33.78			
PK	5.852G	64.10	68.20	-4.10	56.74	3	Vertical	360	1.80	-	33.91	7.22	33.77			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

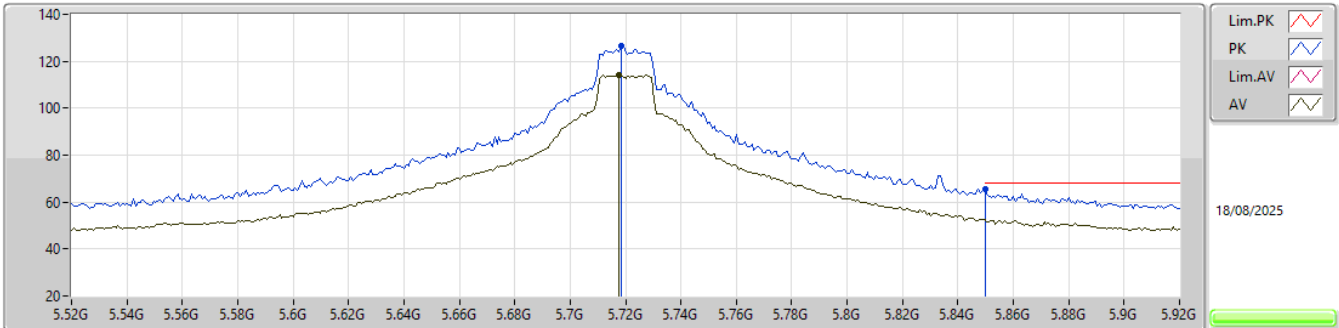


EUT_Y_2TX
Setting 108
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7184G	126.43	Inf	-Inf	119.50	3	Horizontal	3	1.80	-	33.64	7.07	33.78			
AV	5.7176G	113.96	Inf	-Inf	107.03	3	Horizontal	3	1.80	-	33.64	7.07	33.78			
PK	5.85G	65.54	68.20	-2.66	58.19	3	Horizontal	3	1.80	-	33.90	7.22	33.77			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

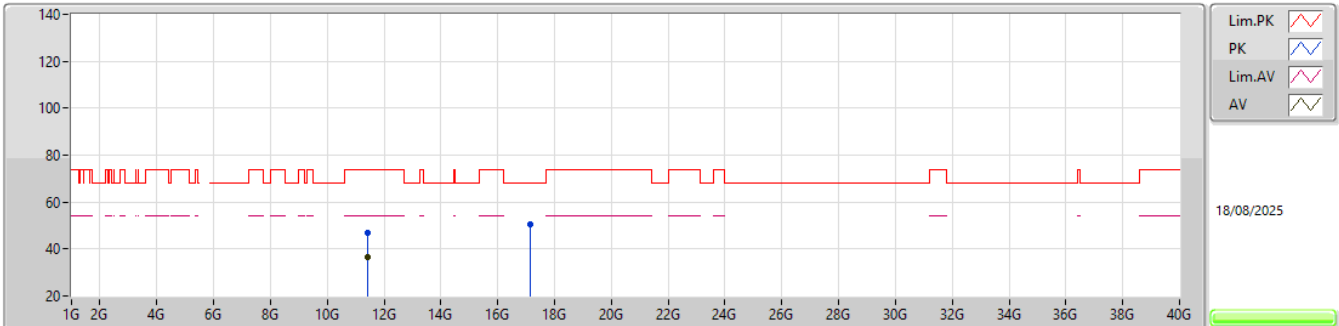EUT_Y_2TX
Setting 108
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43868G	46.67	74.00	-27.33	60.83	3	Vertical	10	1.41	-	40.32	11.72	66.20			
AV	11.42674G	36.44	54.00	-17.56	50.58	3	Vertical	10	1.41	-	40.35	11.71	66.20			
PK	17.15658G	50.71	68.20	-17.49	58.88	3	Vertical	301	2.78	-	42.30	13.81	64.28			

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

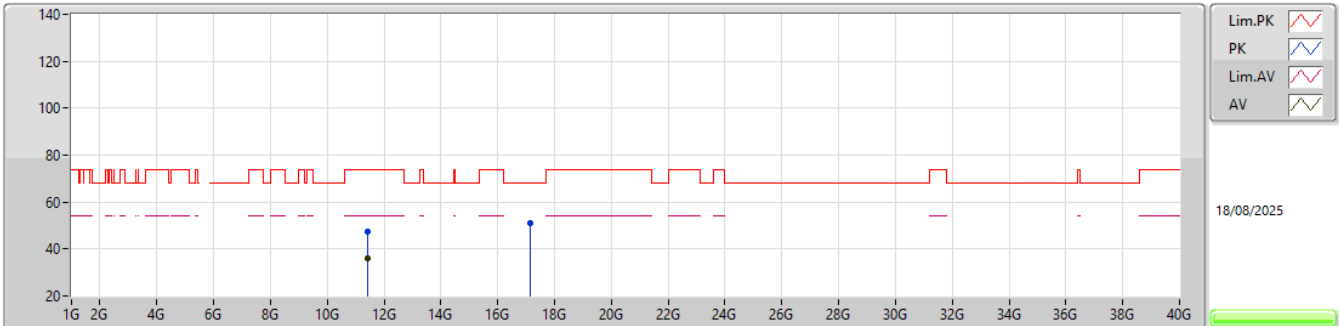EUT_Y_2TX
Setting 108
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.42926G	47.24	74.00	-26.76	61.39	3	Horizontal	10	2.30	-	40.34	11.71	66.20			
AV	11.42602G	35.86	54.00	-18.14	50.00	3	Horizontal	10	2.30	-	40.35	11.71	66.20			
PK	17.15412G	50.82	68.20	-17.38	58.99	3	Horizontal	350	1.94	-	42.30	13.81	64.28			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5510MHz_TX

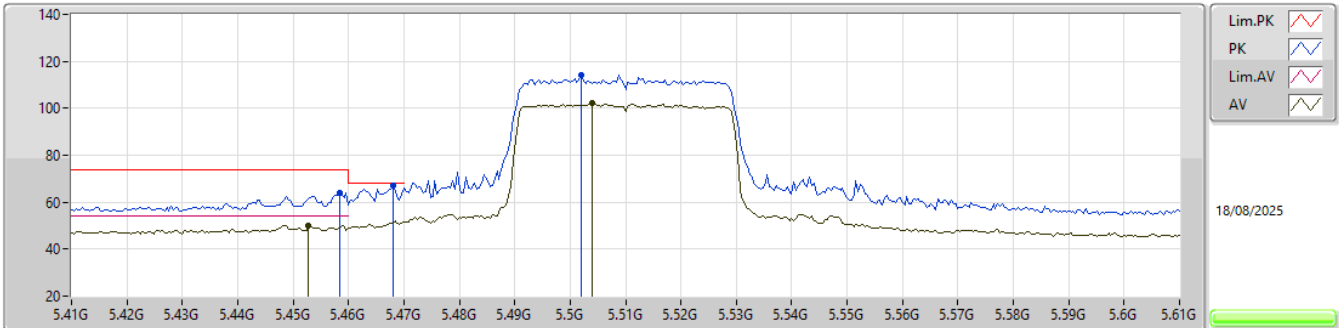


EUT_Y_2TX
Setting 60
06-E-R-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4584G	64.20	74.00	-9.80	57.23	3	Vertical	360	1.95	-	33.88	6.89	33.80			
AV	5.4528G	50.05	54.00	-3.95	43.07	3	Vertical	360	1.95	-	33.89	6.89	33.80			
PK	5.468G	66.84	68.20	-1.36	59.89	3	Vertical	360	1.95	-	33.86	6.89	33.80			
PK	5.502G	114.07	Inf	-Inf	107.18	3	Vertical	360	1.95	-	33.80	6.90	33.81			
AV	5.504G	102.16	Inf	-Inf	95.27	3	Vertical	360	1.95	-	33.80	6.90	33.81			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5510MHz_TX

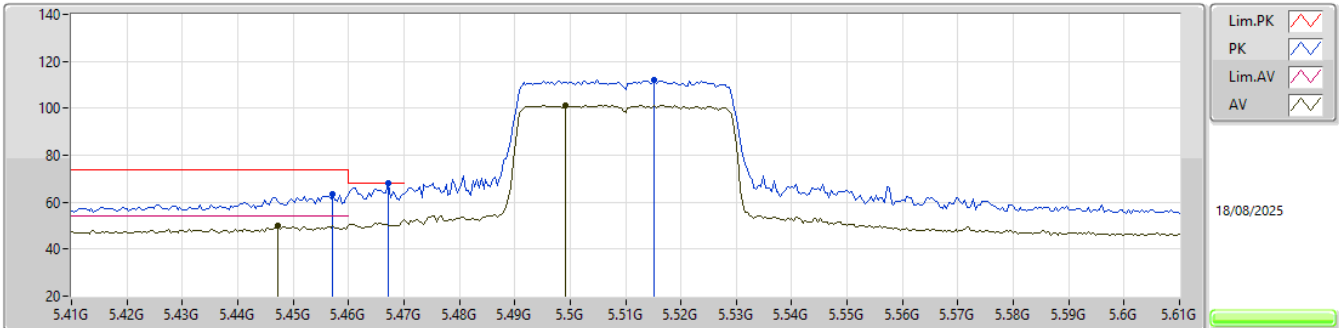


EUT_Y_2TX
Setting 60
06-E-R-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4572G	63.24	74.00	-10.76	56.26	3	Horizontal	360	1.80	-	33.89	6.89	33.80			
AV	5.4472G	50.17	54.00	-3.83	43.18	3	Horizontal	360	1.80	-	33.90	6.89	33.80			
PK	5.4672G	67.94	68.20	-0.26	60.98	3	Horizontal	360	1.80	-	33.87	6.89	33.80			
PK	5.5152G	112.08	Inf	-Inf	105.19	3	Horizontal	360	1.80	-	33.80	6.90	33.81			
AV	5.4992G	101.34	Inf	-Inf	94.46	3	Horizontal	360	1.80	-	33.80	6.89	33.81			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5510MHz_TX

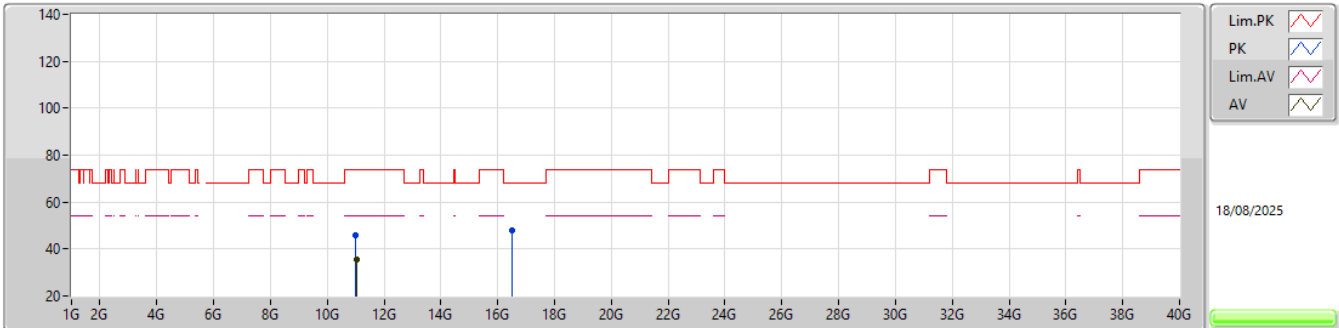


EUT_Y_2TX
Setting 60
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01508G	45.62	74.00	-28.38	60.84	3	Vertical	214	2.71	-	39.53	11.44	66.19			
AV	11.0245G	35.49	54.00	-18.51	50.68	3	Vertical	214	2.71	-	39.55	11.45	66.19			
PK	16.51542G	47.91	68.20	-20.29	58.51	3	Vertical	88	1.24	-	39.56	13.60	63.76			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX


5510MHz_TX

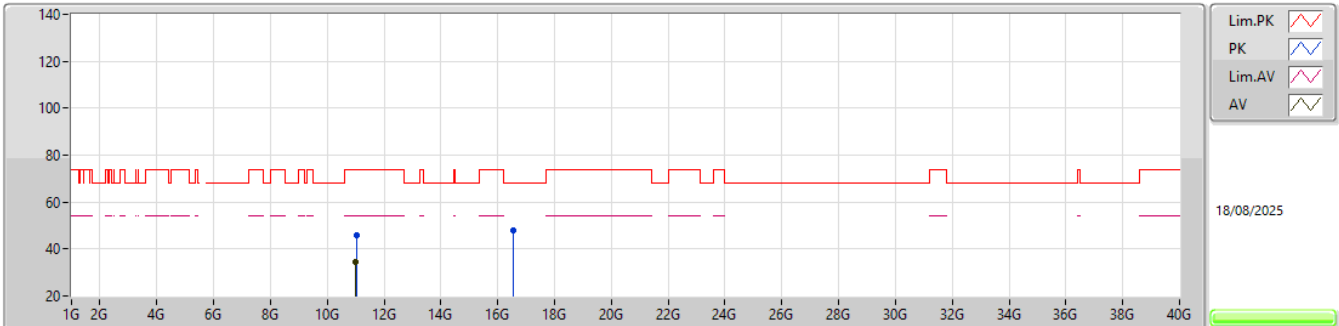EUT Y_2TX
Setting 60
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.017G	45.68	74.00	-28.32	60.90	3	Horizontal	185	1.18	-	39.53	11.44	66.19			
AV	11.01238G	34.51	54.00	-19.49	49.74	3	Horizontal	185	1.18	-	39.52	11.44	66.19			
PK	16.53678G	47.86	68.20	-20.34	58.39	3	Horizontal	54	1.56	-	39.65	13.60	63.78			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5550MHz_TX

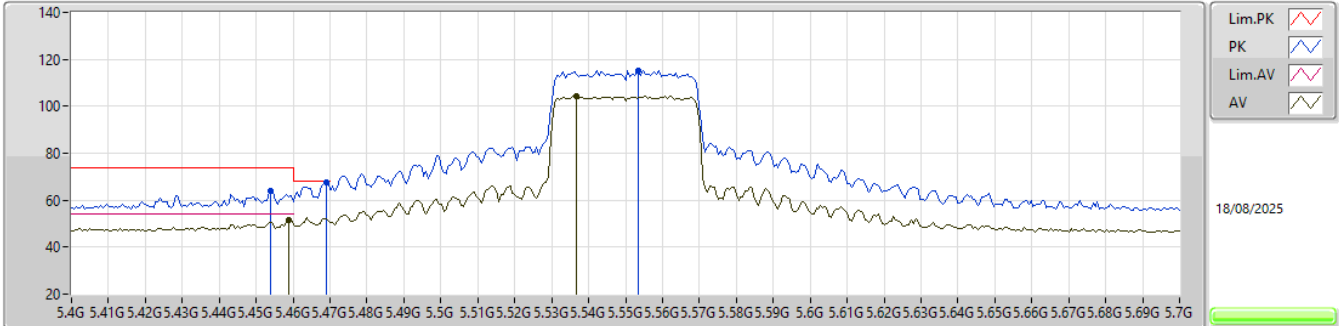


EUT_Y_2TX
Setting 72
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.454G	63.78	74.00	-10.22	56.80	3	Vertical	356	1.74	-	33.89	6.89	33.80			
AV	5.4588G	51.32	54.00	-2.68	44.35	3	Vertical	356	1.74	-	33.88	6.89	33.80			
PK	5.469G	67.39	68.20	-0.81	60.44	3	Vertical	356	1.74	-	33.86	6.89	33.80			
PK	5.536G	115.29	Inf	-Inf	108.40	3	Vertical	356	1.74	-	33.79	6.90	33.80			
AV	5.5368G	104.34	Inf	-Inf	97.45	3	Vertical	356	1.74	-	33.80	6.90	33.81			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5550MHz_TX

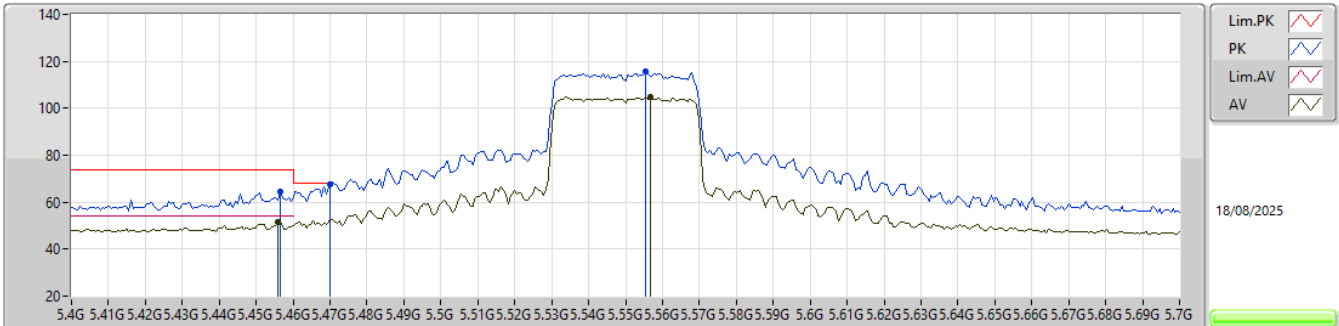


EUT_Y_2TX
Setting 72
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4564G	64.31	74.00	-9.69	57.33	3	Horizontal	341	1.80	-	33.89	6.89	33.80			
AV	5.4558G	51.56	54.00	-2.44	44.58	3	Horizontal	341	1.80	-	33.89	6.89	33.80			
PK	5.47G	67.75	68.20	-0.45	60.80	3	Horizontal	341	1.80	-	33.86	6.89	33.80			
PK	5.554G	115.67	Inf	-Inf	108.79	3	Horizontal	341	1.80	-	33.78	6.90	33.80			
AV	5.556G	104.82	Inf	-Inf	97.95	3	Horizontal	341	1.80	-	33.77	6.90	33.80			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX


5550MHz_TX

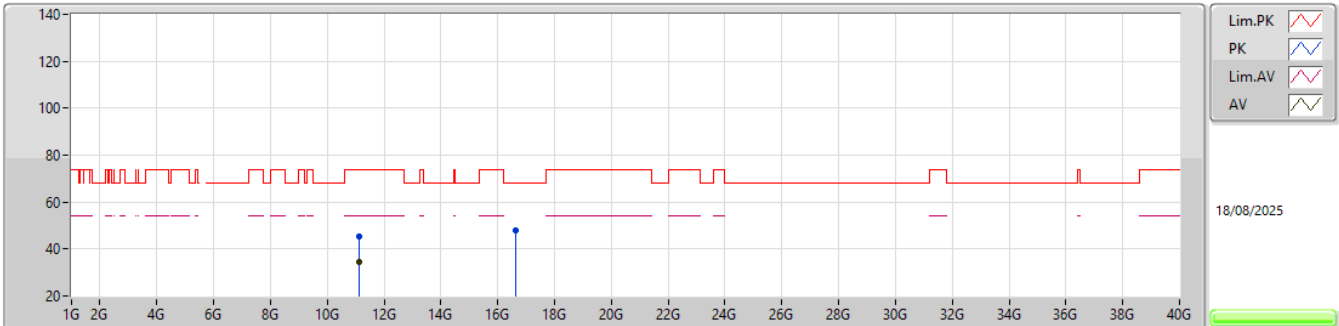EUT_Y_2TX
Setting 72
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.10618G	45.54	74.00	-28.46	60.62	3	Vertical	74	1.27	-	39.61	11.50	66.19			
AV	11.10606G	34.48	54.00	-19.52	49.56	3	Vertical	74	1.27	-	39.61	11.50	66.19			
PK	16.63986G	47.95	68.20	-20.25	58.30	3	Vertical	197	1.00	-	39.90	13.64	63.89			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5550MHz_TX

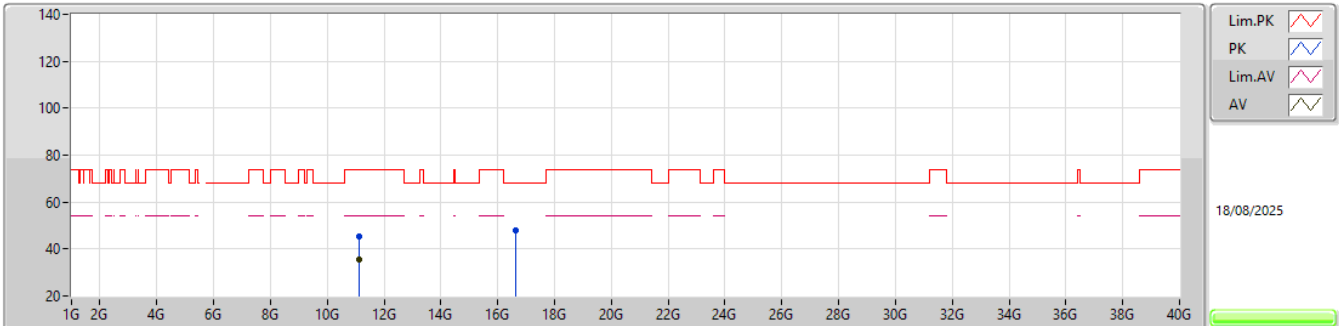


EUT_Y_2TX
Setting 72
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.11242G	45.33	74.00	-28.67	60.40	3	Horizontal	94	2.09	-	39.62	11.50	66.19			
AV	11.1129G	35.27	54.00	-18.73	50.33	3	Horizontal	94	2.09	-	39.63	11.50	66.19			
PK	16.65024G	47.97	68.20	-20.23	58.34	3	Horizontal	24	1.69	-	39.90	13.64	63.91			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5670MHz_TX

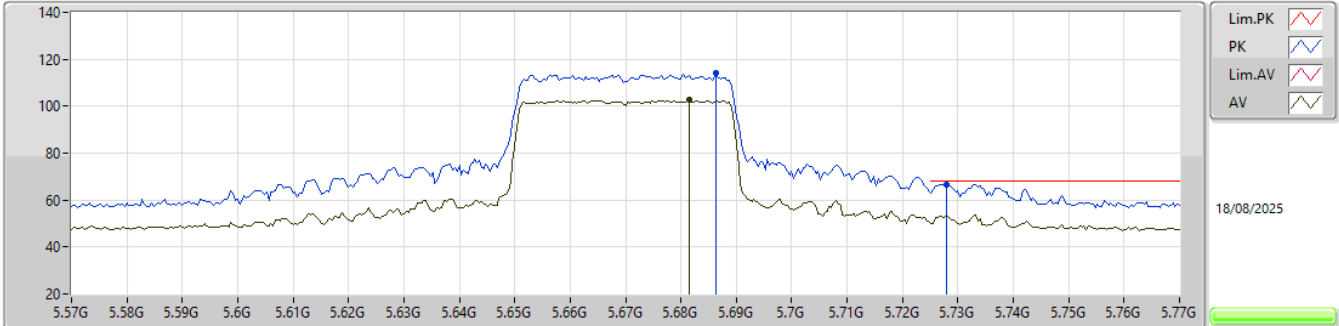


EUT_Y_2TX
Setting 67
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.684G	114.02	Inf	-Inf	107.21	3	Vertical	355	1.83	-	33.57	7.03	33.79			
AV	5.6816G	102.61	Inf	-Inf	95.82	3	Vertical	355	1.83	-	33.56	7.02	33.79			
PK	5.728G	66.68	68.20	-1.52	59.72	3	Vertical	355	1.83	-	33.66	7.08	33.78			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5670MHz_TX

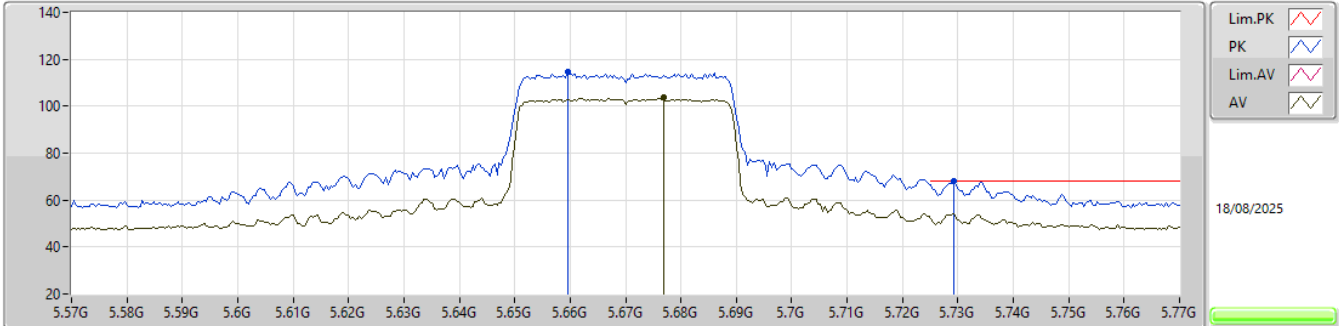


EUT_Y_2TX
Setting 67
06-E-R-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6596G	114.50	Inf	-Inf	107.78	3	Horizontal	360	1.80	-	33.52	6.99	33.79			
AV	5.6768G	103.83	Inf	-Inf	97.06	3	Horizontal	360	1.80	-	33.55	7.01	33.79			
PK	5.7292G	68.05	68.20	-0.15	61.09	3	Horizontal	360	1.80	-	33.66	7.08	33.78			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX


5670MHz_TX

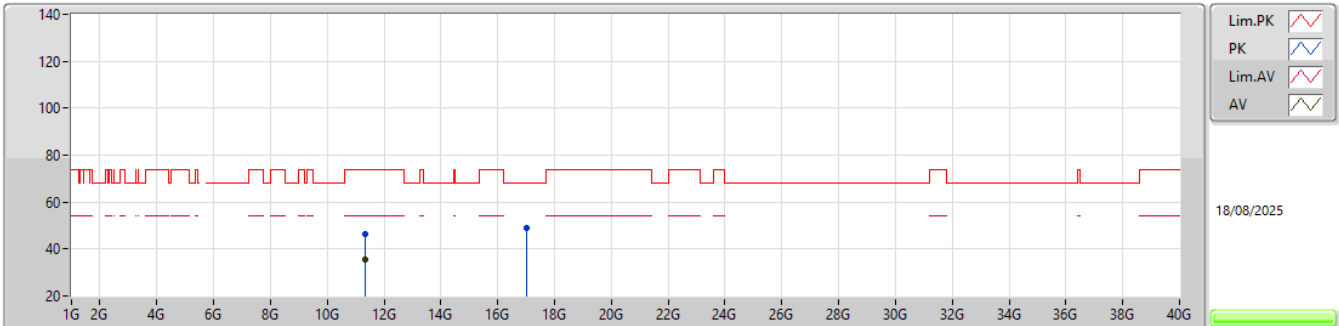EUT_Y_2TX
Setting 67
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.3286G	46.13	74.00	-27.87	60.43	3	Vertical	193	1.62	-	40.26	11.64	66.20			
AV	11.3379G	35.53	54.00	-18.47	49.80	3	Vertical	193	1.62	-	40.28	11.65	66.20			
PK	16.99776G	48.76	68.20	-19.44	57.70	3	Vertical	42	1.10	-	41.59	13.76	64.29			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX


5670MHz_TX

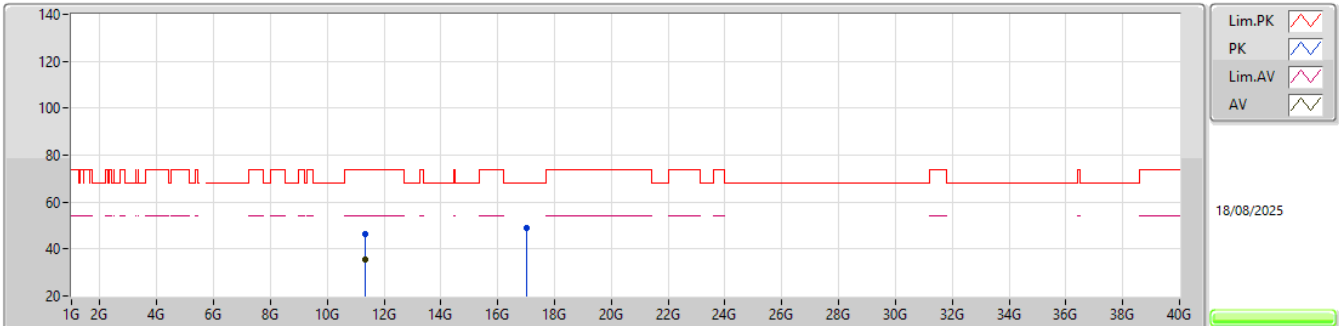EUT_Y_2TX
Setting 67
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.32608G	46.38	74.00	-27.62	60.69	3	Horizontal	325	2.83	-	40.25	11.64	66.20			
AV	11.32866G	35.40	54.00	-18.60	49.70	3	Horizontal	325	2.83	-	40.26	11.64	66.20			
PK	17.01822G	49.03	68.20	-19.17	57.91	3	Horizontal	220	2.27	-	41.64	13.77	64.29			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

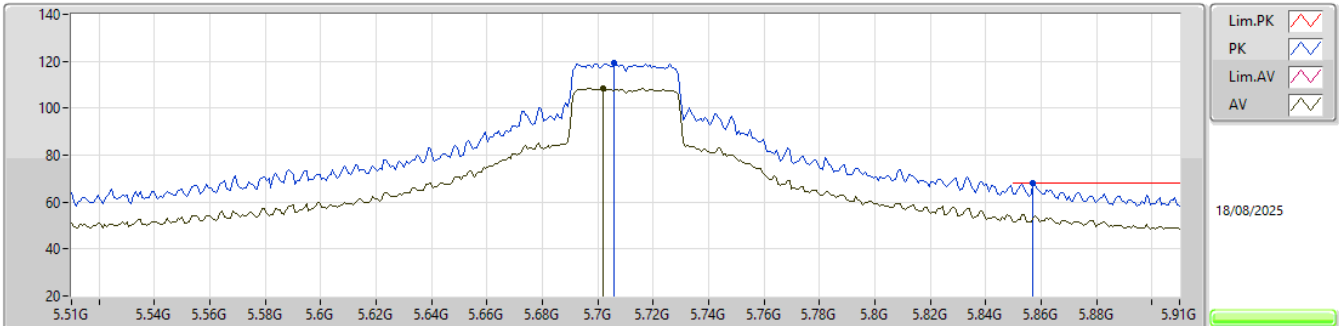


EUT_Y_2TX
Setting 89
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.706G	119.33	Inf	-Inf	112.46	3	Vertical	352	1.84	-	33.61	7.05	33.79			
AV	5.702G	108.46	Inf	-Inf	101.60	3	Vertical	352	1.84	-	33.60	7.05	33.79			
PK	5.8572G	68.19	68.20	-0.01	60.81	3	Vertical	352	1.84	-	33.93	7.22	33.77			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

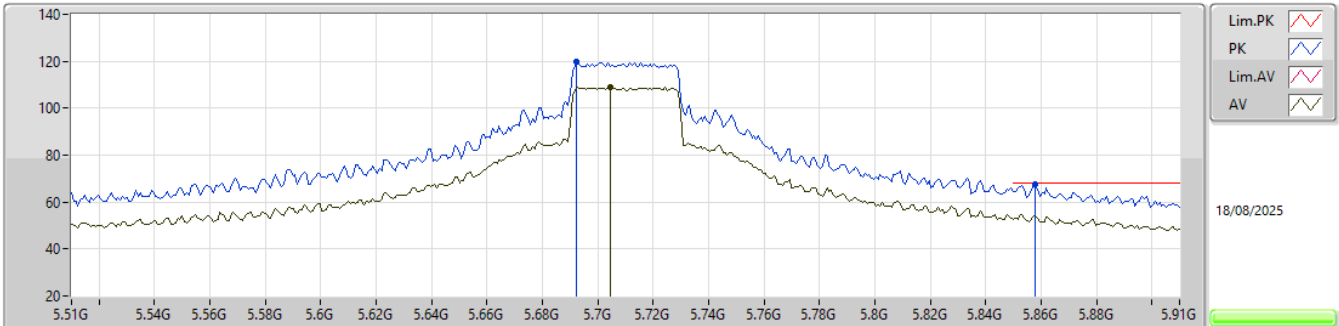


EUT_Y_2TX
Setting 89
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6924G	119.67	Inf	-Inf	112.85	3	Horizontal	0	1.80	-	33.58	7.03	33.79			
AV	5.7044G	109.01	Inf	-Inf	102.14	3	Horizontal	0	1.80	-	33.61	7.05	33.79			
PK	5.858G	67.70	68.20	-0.50	60.32	3	Horizontal	0	1.80	-	33.93	7.22	33.77			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX


5710MHz Straddle 5.47-5.725GHz_TX

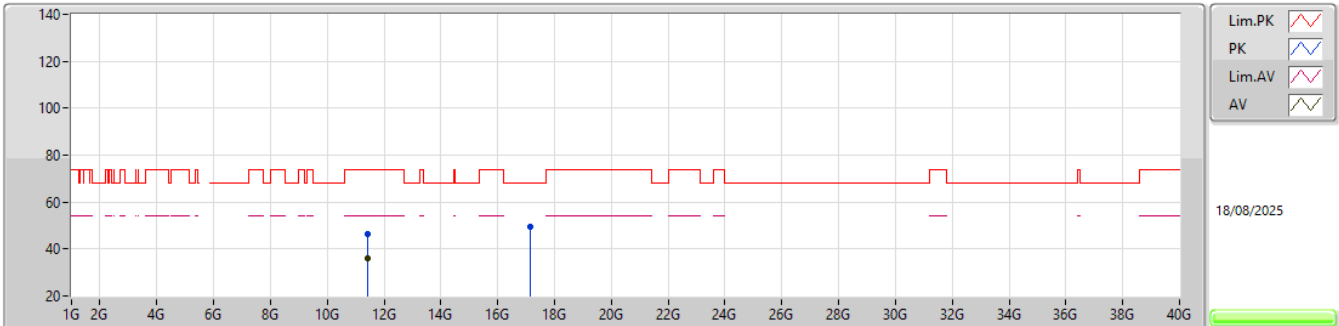EUT_Y_2TX
Setting 89
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.41844G	46.45	74.00	-27.55	60.59	3	Vertical	142	1.36	-	40.36	11.70	66.20			
AV	11.42078G	36.24	54.00	-17.76	50.38	3	Vertical	142	1.36	-	40.36	11.70	66.20			
PK	17.14254G	49.49	68.20	-18.71	57.69	3	Vertical	148	3.00	-	42.27	13.81	64.28			

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX


5710MHz Straddle 5.47-5.725GHz_TX

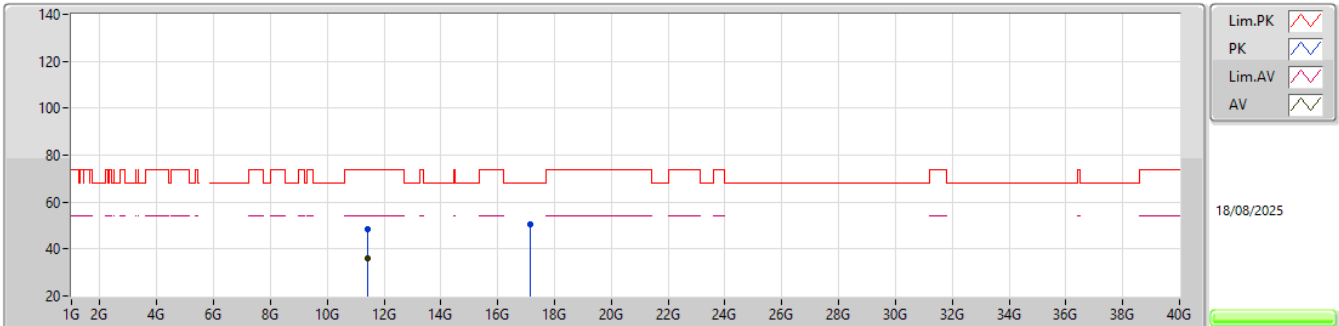EUT_Y_2TX
Setting 89
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40716G	48.20	74.00	-25.80	62.32	3	Horizontal	347	1.03	-	40.39	11.69	66.20			
AV	11.42522G	35.79	54.00	-18.21	49.93	3	Horizontal	347	1.03	-	40.35	11.71	66.20			
PK	17.12562G	50.51	68.20	-17.69	58.79	3	Horizontal	222	2.89	-	42.20	13.80	64.28			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5530MHz_TX

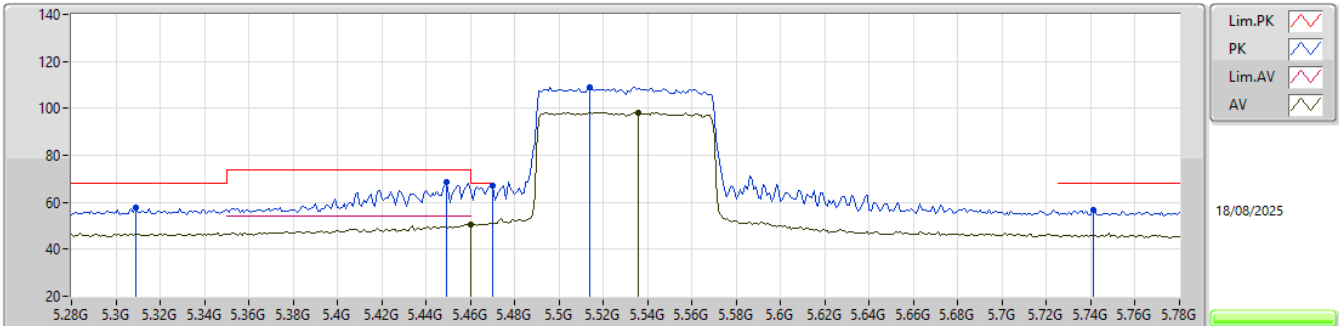


EUT_Y_2TX
Setting 61
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.309G	57.53	68.20	-10.67	50.56	3	Vertical	352	1.78	-	33.86	6.87	33.76			
PK	5.449G	68.49	74.00	-5.51	61.50	3	Vertical	352	1.78	-	33.90	6.89	33.80			
PK	5.47G	66.89	68.20	-1.31	59.94	3	Vertical	352	1.78	-	33.86	6.89	33.80			
AV	5.46G	50.50	54.00	-3.50	43.53	3	Vertical	352	1.78	-	33.88	6.89	33.80			
PK	5.514G	109.12	Inf	-Inf	102.23	3	Vertical	352	1.78	-	33.80	6.90	33.81			
AV	5.536G	98.36	Inf	-Inf	91.47	3	Vertical	352	1.78	-	33.80	6.90	33.81			
PK	5.741G	56.47	68.20	-11.73	49.47	3	Vertical	352	1.78	-	33.68	7.10	33.78			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5530MHz_TX

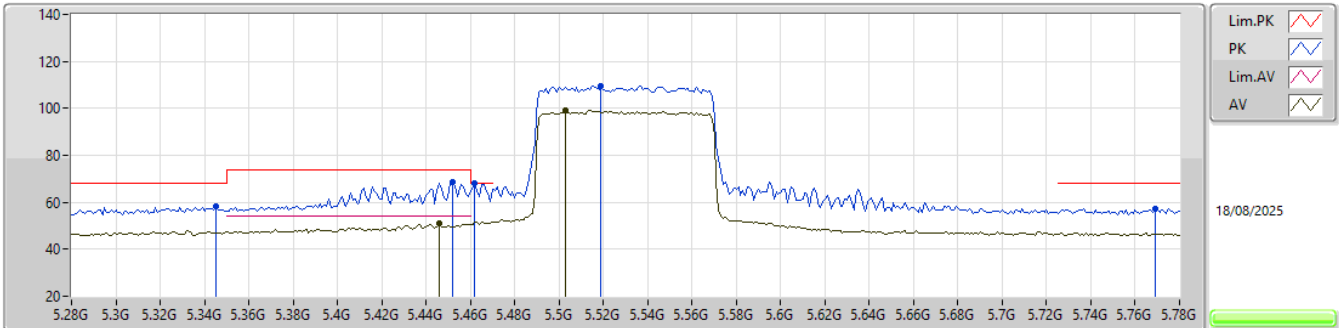


EUT_Y_2TX
Setting 61
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.345G	58.12	68.20	-10.08	51.30	3	Horizontal	336	1.90	-	33.72	6.87	33.77			
PK	5.452G	68.47	74.00	-5.53	61.48	3	Horizontal	336	1.90	-	33.90	6.89	33.80			
AV	5.446G	51.11	54.00	-2.89	44.12	3	Horizontal	336	1.90	-	33.90	6.89	33.80			
PK	5.462G	67.96	68.20	-0.24	60.99	3	Horizontal	336	1.90	-	33.88	6.89	33.80			
PK	5.519G	109.73	Inf	-Inf	102.84	3	Horizontal	336	1.90	-	33.80	6.90	33.81			
AV	5.503G	99.09	Inf	-Inf	92.20	3	Horizontal	336	1.90	-	33.80	6.90	33.81			
PK	5.769G	57.50	68.20	-10.70	50.40	3	Horizontal	336	1.90	-	33.74	7.14	33.78			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX


5530MHz_TX

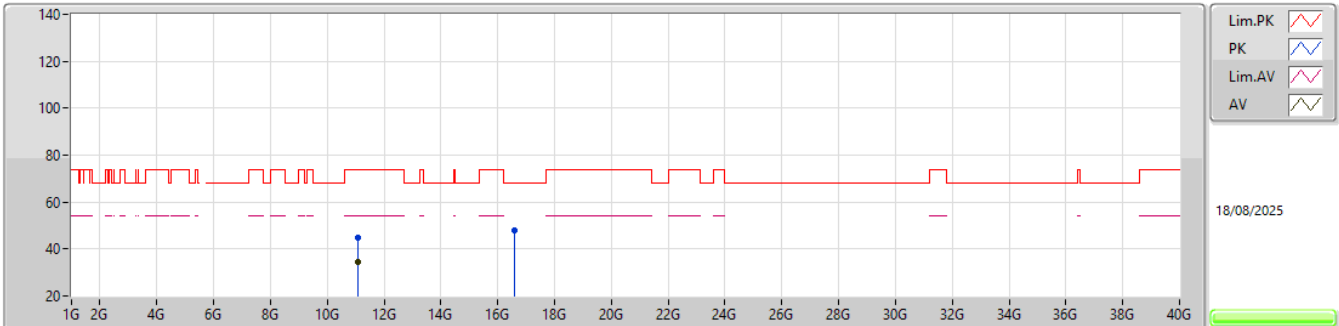EUT Y_2TX
Setting 61
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.06366G	44.90	74.00	-29.10	60.02	3	Vertical	274	1.12	-	39.60	11.47	66.19			
AV	11.07452G	34.28	54.00	-19.72	49.39	3	Vertical	274	1.12	-	39.60	11.48	66.19			
PK	16.60086G	47.74	68.20	-20.46	58.07	3	Vertical	137	2.29	-	39.90	13.62	63.85			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5530MHz_TX

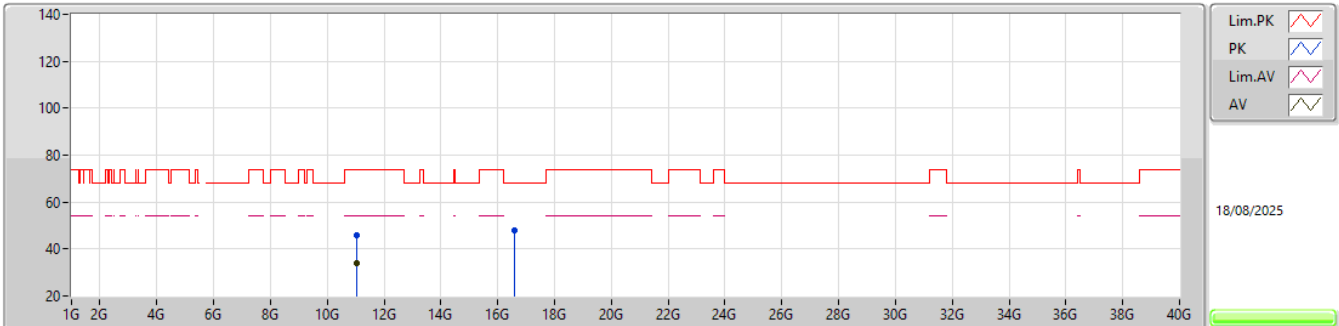


EUT_Y_2TX
Setting 61
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.04656G	45.62	74.00	-28.38	60.76	3	Horizontal	79	2.57	-	39.59	11.46	66.19			
AV	11.05874G	34.20	54.00	-19.80	49.32	3	Horizontal	79	2.57	-	39.60	11.47	66.19			
PK	16.57908G	48.10	68.20	-20.10	58.49	3	Horizontal	324	2.20	-	39.82	13.62	63.83			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5610MHz_TX

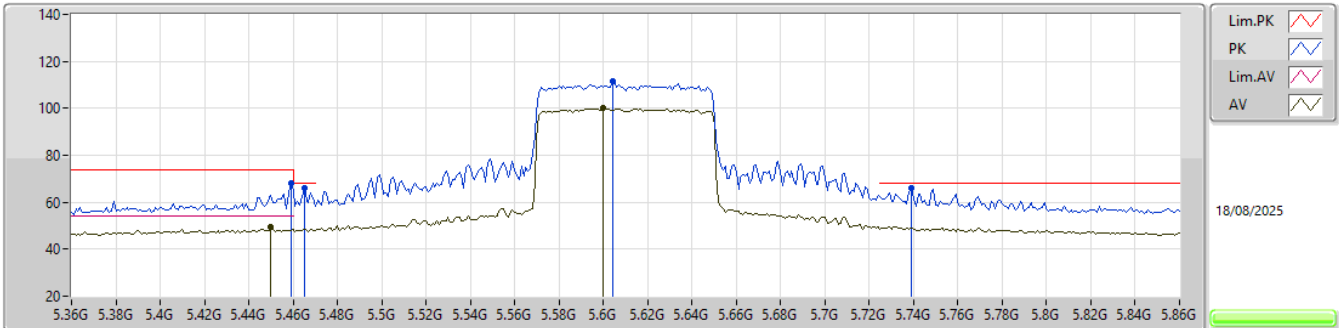


EUT_Y_2TX
Setting 65
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.459G	68.01	74.00	-5.99	61.04	3	Vertical	348	1.80	-	33.88	6.89	33.80			
AV	5.45G	49.24	54.00	-4.76	42.25	3	Vertical	348	1.80	-	33.90	6.89	33.80			
PK	5.465G	65.83	68.20	-2.37	58.87	3	Vertical	348	1.80	-	33.87	6.89	33.80			
PK	5.604G	111.31	Inf	-Inf	104.60	3	Vertical	348	1.80	-	33.59	6.92	33.80			
AV	5.6G	100.08	Inf	-Inf	93.37	3	Vertical	348	1.80	-	33.60	6.91	33.80			
PK	5.739G	65.99	68.20	-2.21	58.99	3	Vertical	348	1.80	-	33.68	7.10	33.78			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5610MHz_TX

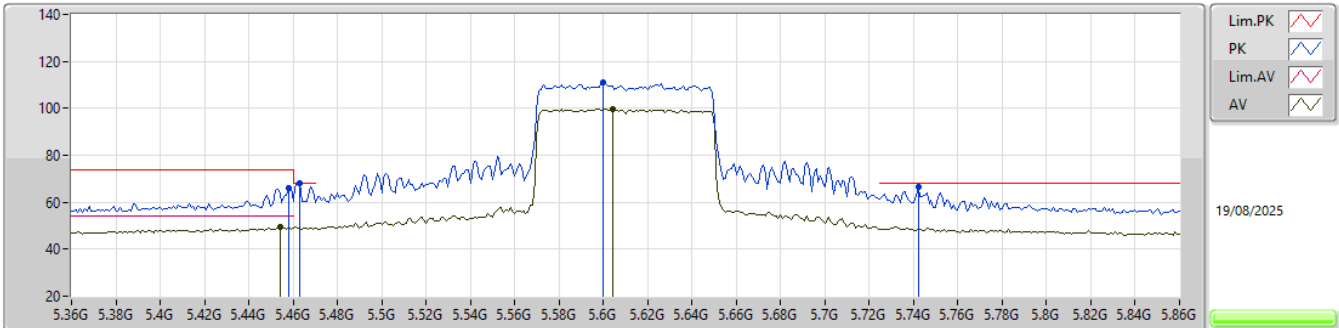


EUT Y_2TX
Setting 65
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.458G	66.11	74.00	-7.89	59.14	3	Horizontal	346	1.80	-	33.88	6.89	33.80
AV	5.454G	49.40	54.00	-4.60	42.42	3	Horizontal	346	1.80	-	33.89	6.89	33.80
PK	5.463G	68.18	68.20	-0.02	61.22	3	Horizontal	346	1.80	-	33.87	6.89	33.80
PK	5.6G	111.15	Inf	-Inf	104.44	3	Horizontal	346	1.80	-	33.60	6.91	33.80
AV	5.604G	99.89	Inf	-Inf	93.18	3	Horizontal	346	1.80	-	33.59	6.92	33.80
PK	5.742G	66.47	68.20	-1.73	59.47	3	Horizontal	346	1.80	-	33.68	7.10	33.78

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX


5610MHz_TX

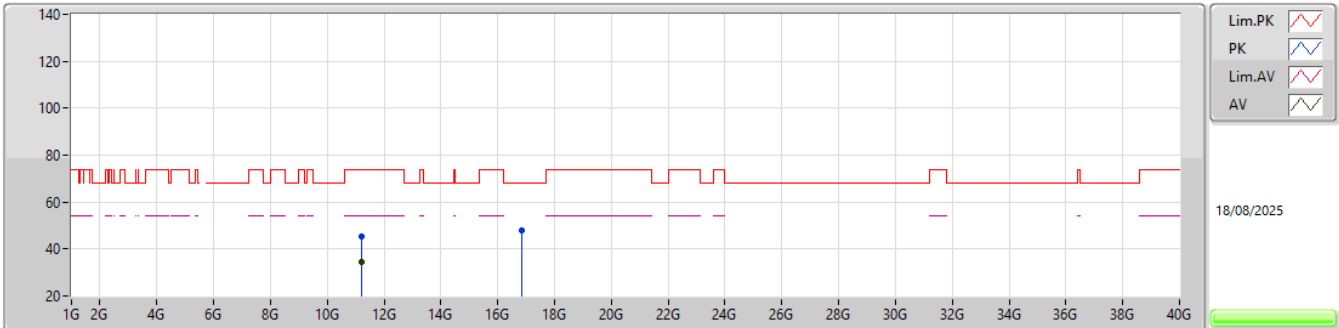EUT Y_2TX
Setting 65
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21094G	45.47	74.00	-28.53	60.25	3	Vertical	181	2.60	-	39.84	11.57	66.19			
AV	11.23044G	34.59	54.00	-19.41	49.28	3	Vertical	181	2.60	-	39.92	11.58	66.19			
PK	16.84374G	47.75	68.20	-20.45	57.47	3	Vertical	284	2.08	-	40.69	13.71	64.12			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5610MHz_TX

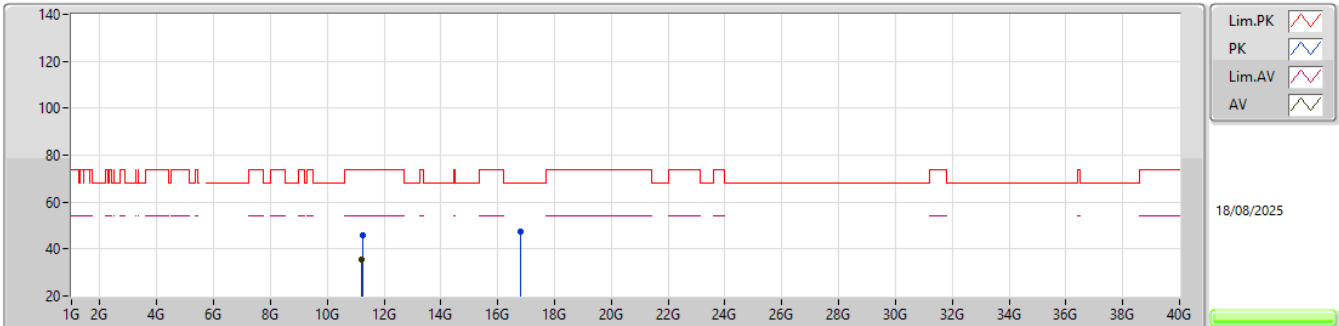


EUT_Y_2TX
Setting 65
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.23392G	45.73	74.00	-28.27	60.40	3	Horizontal	164	1.06	-	39.94	11.58	66.19			
AV	11.20998G	35.32	54.00	-18.68	50.10	3	Horizontal	164	1.06	-	39.84	11.57	66.19			
PK	16.81518G	47.53	68.20	-20.67	57.29	3	Horizontal	327	1.02	-	40.63	13.70	64.09			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

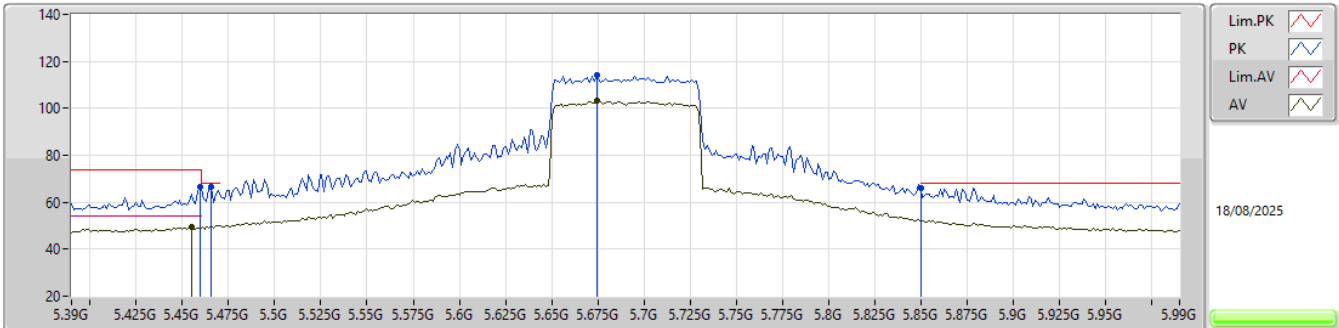


EUT_Y_2TX
Setting 77
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4596G	66.30	74.00	-7.70	59.33	3	Vertical	346	1.74	-	33.88	6.89	33.80			
AV	5.4548G	49.48	54.00	-4.52	42.50	3	Vertical	346	1.74	-	33.89	6.89	33.80			
PK	5.4656G	66.42	68.20	-1.78	59.46	3	Vertical	346	1.74	-	33.87	6.89	33.80			
PK	5.6744G	113.94	Inf	-Inf	107.17	3	Vertical	346	1.74	-	33.55	7.01	33.79			
AV	5.6744G	103.05	Inf	-Inf	96.28	3	Vertical	346	1.74	-	33.55	7.01	33.79			
PK	5.85G	66.17	68.20	-2.03	58.82	3	Vertical	346	1.74	-	33.90	7.22	33.77			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

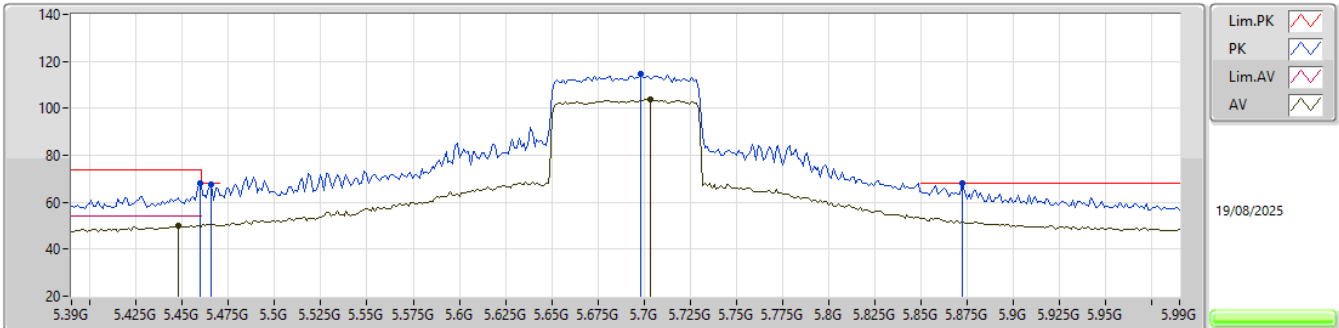


EUT_Y_2TX
Setting 77
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4596G	68.02	74.00	-5.98	61.05	3	Horizontal	357	1.90	-	33.88	6.89	33.80			
AV	5.4476G	50.20	54.00	-3.80	43.21	3	Horizontal	357	1.90	-	33.90	6.89	33.80			
PK	5.4656G	67.49	68.20	-0.71	60.53	3	Horizontal	357	1.90	-	33.87	6.89	33.80			
PK	5.6984G	114.83	Inf	-Inf	107.98	3	Horizontal	357	1.90	-	33.60	7.04	33.79			
AV	5.7032G	103.97	Inf	-Inf	97.10	3	Horizontal	357	1.90	-	33.61	7.05	33.79			
PK	5.8724G	67.88	68.20	-0.32	60.43	3	Horizontal	357	1.90	-	33.99	7.23	33.77			

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

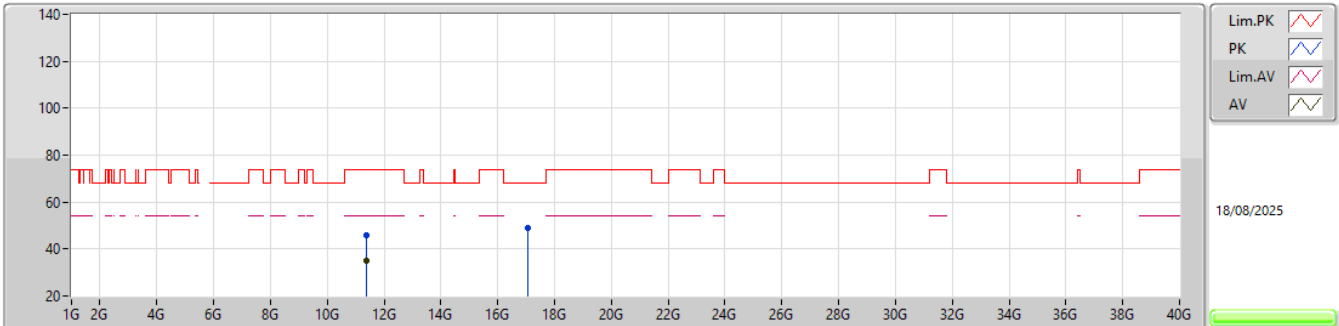


EUT_Y_2TX
Setting 77
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.39314G	46.03	74.00	-27.97	60.15	3	Vertical	102	2.94	-	40.39	11.69	66.20				
AV	11.37346G	35.15	54.00	-18.85	49.33	3	Vertical	102	2.94	-	40.35	11.67	66.20				
PK	17.05644G	48.94	68.20	-19.26	57.70	3	Vertical	215	2.09	-	41.75	13.78	64.29				

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

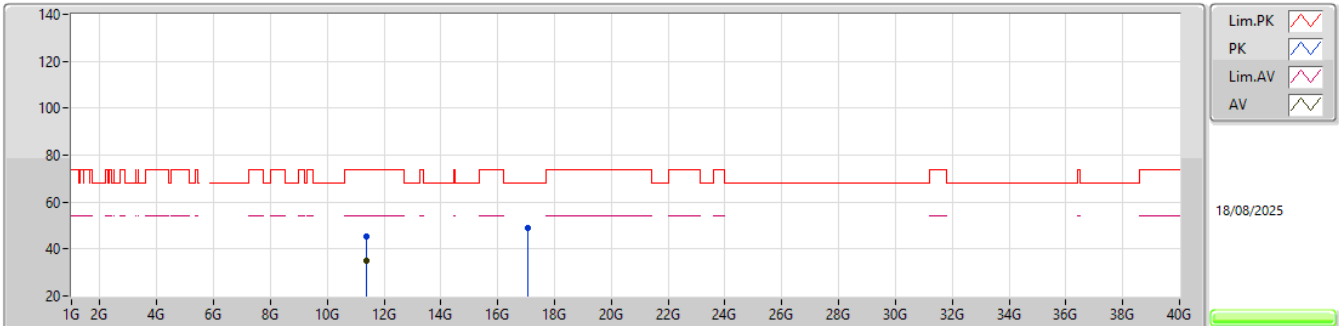


EUT_Y_2TX
Setting 77
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.38108G	45.42	74.00	-28.58	59.58	3	Horizontal	43	1.96	-	40.36	11.68	66.20				
AV	11.39026G	34.97	54.00	-19.03	49.11	3	Horizontal	43	1.96	-	40.38	11.68	66.20				
PK	17.07138G	49.09	68.20	-19.11	57.73	3	Horizontal	55	1.68	-	41.87	13.78	64.29				

5.47-5.725GHz_802.11be EHT160_Nss2,(MCS0)_2TX

5570MHz_TX

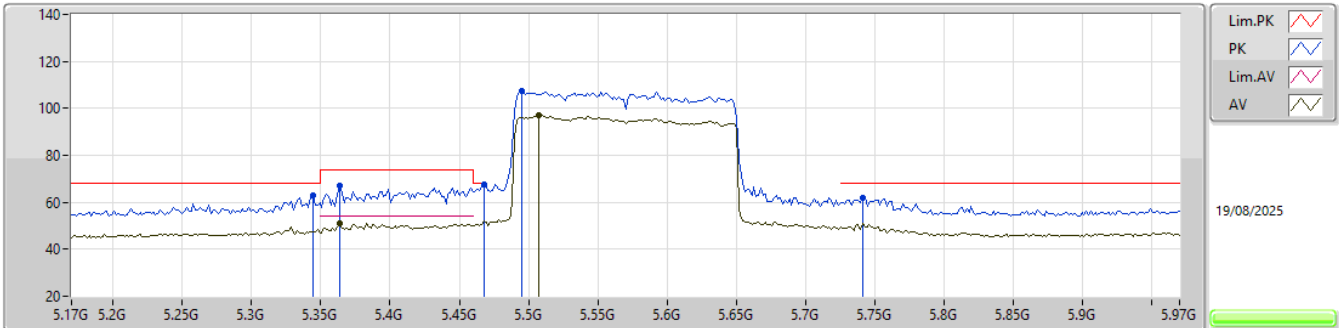


EUT_Y_2TX
Setting 66
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3444G	63.07	68.20	-5.13	56.25	3	Vertical	352	2.02	-	33.72	6.87	33.77
PK	5.3636G	67.16	74.00	-6.84	60.31	3	Vertical	352	2.02	-	33.75	6.87	33.77
AV	5.3636G	50.92	54.00	-3.08	44.07	3	Vertical	352	2.02	-	33.75	6.87	33.77
PK	5.4676G	67.68	68.20	-0.52	60.73	3	Vertical	352	2.02	-	33.86	6.89	33.80
PK	5.4948G	107.26	Inf	-Inf	100.37	3	Vertical	352	2.02	-	33.81	6.89	33.81
AV	5.5076G	97.05	Inf	-Inf	90.16	3	Vertical	352	2.02	-	33.80	6.90	33.81
PK	5.7412G	62.09	68.20	-6.11	55.09	3	Vertical	352	2.02	-	33.68	7.10	33.78

5.47-5.725GHz_802.11be EHT160_Nss2,(MCS0)_2TX

5570MHz_TX

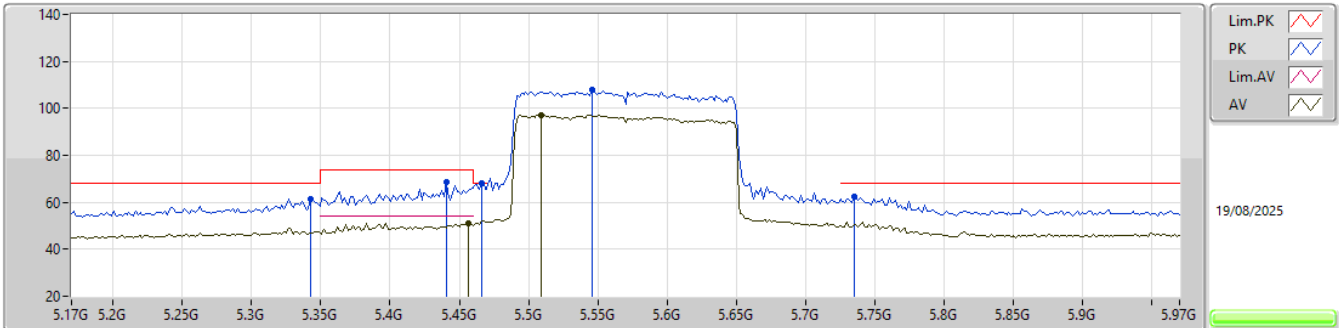


EUT_Y_2TX
Setting 66
06-E-R-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3428G	61.29	68.20	-6.91	54.46	3	Horizontal	330	2.75	-	33.73	6.87	33.77			
PK	5.4404G	68.51	74.00	-5.49	61.51	3	Horizontal	330	2.75	-	33.90	6.89	33.79			
PK	5.466G	67.93	68.20	-0.27	60.97	3	Horizontal	330	2.75	-	33.87	6.89	33.80			
AV	5.4564G	51.03	54.00	-2.97	44.05	3	Horizontal	330	2.75	-	33.89	6.89	33.80			
PK	5.546G	107.84	Inf	-Inf	100.94	3	Horizontal	330	2.75	-	33.80	6.90	33.80			
AV	5.5092G	97.30	Inf	-Inf	90.41	3	Horizontal	330	2.75	-	33.80	6.90	33.81			
PK	5.7348G	62.16	68.20	-6.04	55.18	3	Horizontal	330	2.75	-	33.67	7.09	33.78			

5.47-5.725GHz_802.11be EHT160_Nss2,(MCS0)_2TX


5570MHz_TX

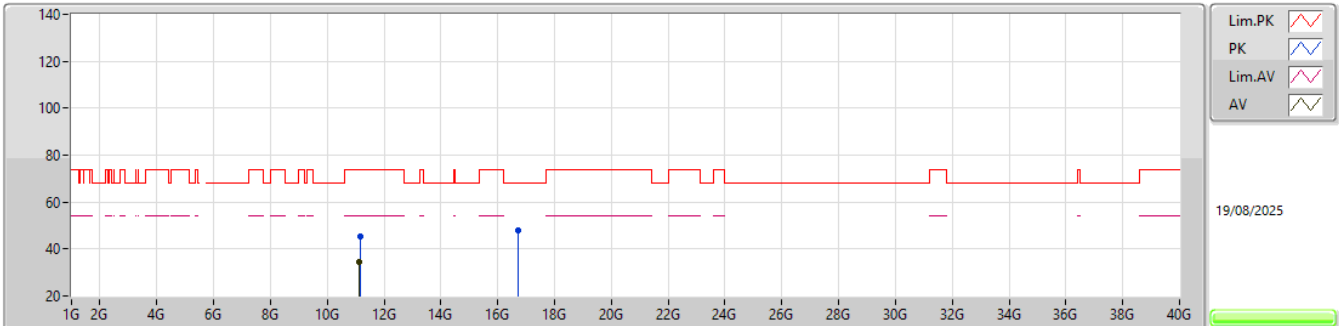EUT_Y_2TX
Setting 66
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14612G	45.42	74.00	-28.58	60.40	3	Vertical	162	2.00	-	39.69	11.52	66.19			
AV	11.12968G	34.71	54.00	-19.29	49.73	3	Vertical	162	2.00	-	39.66	11.51	66.19			
PK	16.71156G	48.13	68.20	-20.07	58.29	3	Vertical	148	2.65	-	40.15	13.66	63.97			

5.47-5.725GHz_802.11be EHT160_Nss2,(MCS0)_2TX

5570MHz_TX

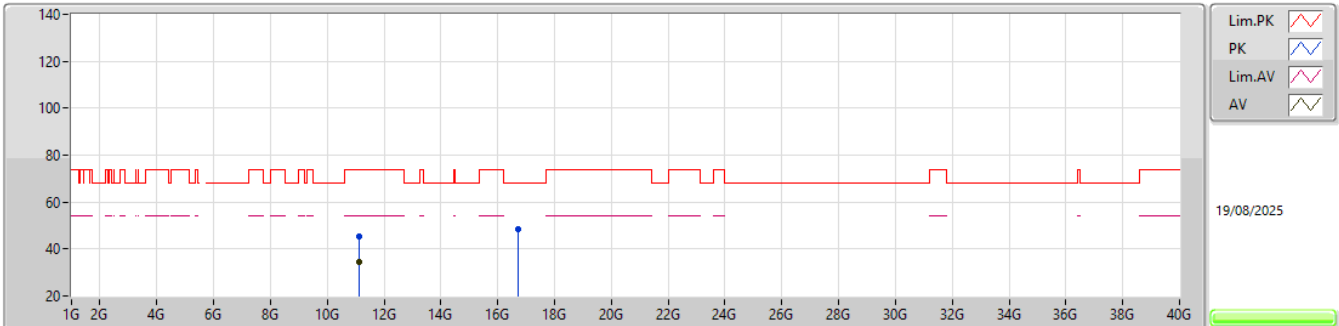

EUT_Y_2TX
Setting 66
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.1412G	45.57	74.00	-28.43	60.56	3	Horizontal	234	2.70	-	39.68	11.52	66.19			
AV	11.13904G	34.74	54.00	-19.26	49.73	3	Horizontal	234	2.70	-	39.68	11.52	66.19			
PK	16.70076G	48.21	68.20	-19.99	58.41	3	Horizontal	203	1.84	-	40.10	13.66	63.96			




Test Mode: Mode 6

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	Pass	AV	5.146G	53.95	54.00	-0.05	3	Horizontal	3	1.36	-

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX


5210MHz_TX

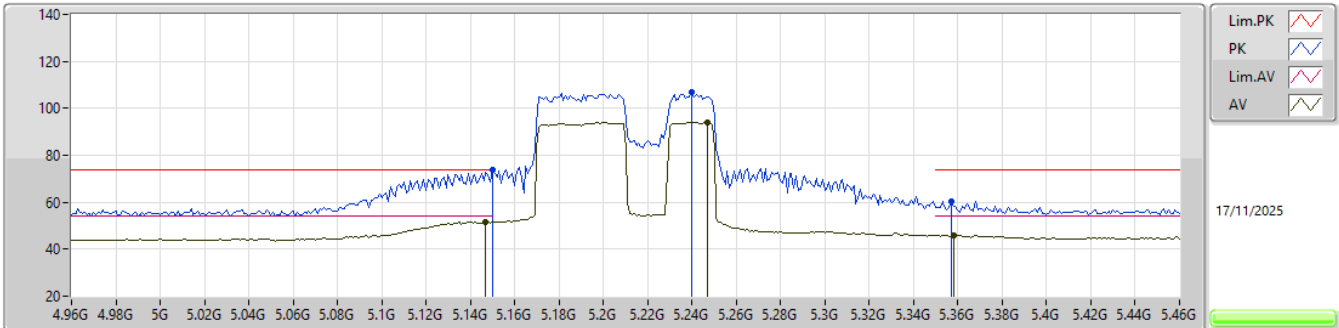EUT_Y_1TX
Setting 63
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	73.83	74.00	-0.17	68.74	3	Vertical	3	1.80	-	31.90	6.91	33.72
AV	5.147G	51.81	54.00	-2.19	46.73	3	Vertical	3	1.80	-	31.89	6.91	33.72
PK	5.24G	106.69	Inf	-Inf	102.12	3	Vertical	3	1.80	-	31.36	6.95	33.74
AV	5.247G	94.19	Inf	-Inf	89.66	3	Vertical	3	1.80	-	31.32	6.95	33.74
PK	5.357G	60.18	74.00	-13.82	55.65	3	Vertical	3	1.80	-	31.31	6.99	33.77
AV	5.358G	45.88	54.00	-8.12	41.34	3	Vertical	3	1.80	-	31.32	6.99	33.77

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX


5210MHz_TX

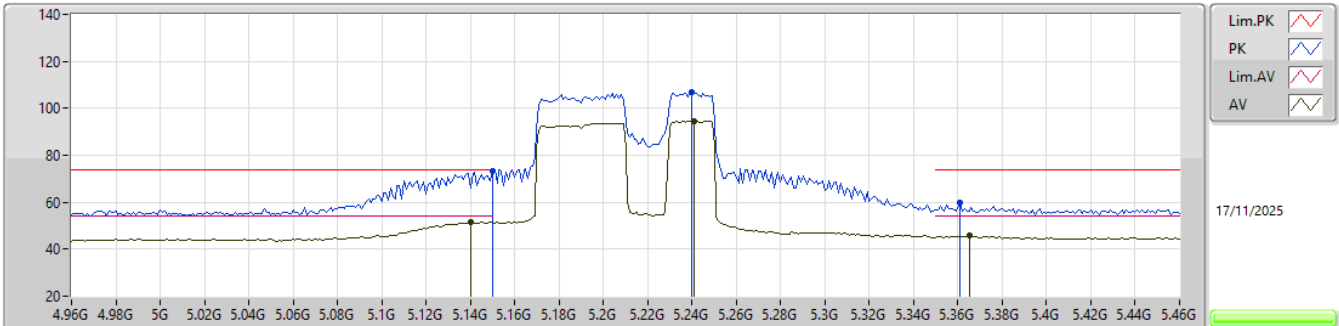EUT_Y_1TX
Setting 63
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	73.51	74.00	-0.49	68.42	3	Horizontal	0	1.24	-	31.90	6.91	33.72
AV	5.14G	51.56	54.00	-2.44	46.52	3	Horizontal	0	1.24	-	31.86	6.90	33.72
PK	5.24G	106.65	Inf	-Inf	102.08	3	Horizontal	0	1.24	-	31.36	6.95	33.74
AV	5.241G	94.64	Inf	-Inf	90.08	3	Horizontal	0	1.24	-	31.35	6.95	33.74
PK	5.361G	59.78	74.00	-14.22	55.24	3	Horizontal	0	1.24	-	31.32	6.99	33.77
AV	5.365G	45.68	54.00	-8.32	41.12	3	Horizontal	0	1.24	-	31.33	7.00	33.77

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX


5210MHz_TX

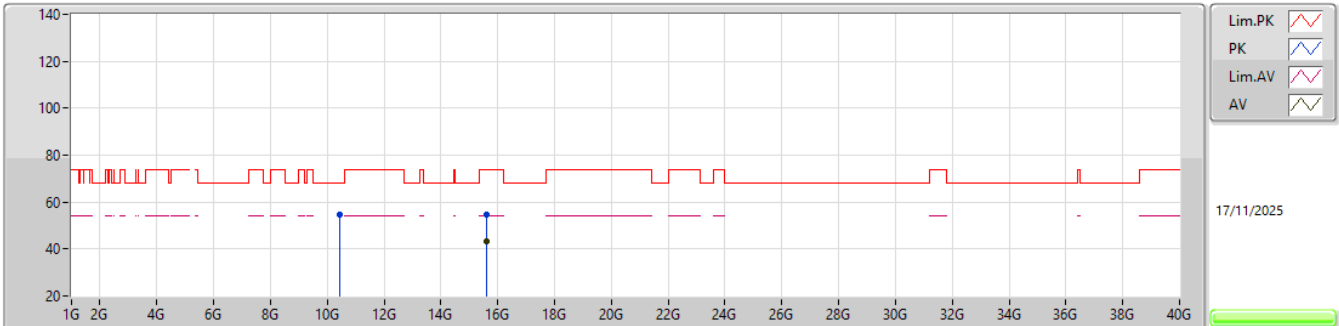EUT_Y_1TX
Setting 63
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4384G	54.57	68.20	-13.63	38.26	3	Vertical	37	2.11	-	39.88	10.70	34.27			
PK	15.61616G	54.61	74.00	-19.39	37.04	3	Vertical	207	2.02	-	38.50	13.62	34.55			
AV	15.61032G	43.16	54.00	-10.84	25.56	3	Vertical	207	2.02	-	38.54	13.62	34.56			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX


5210MHz_TX

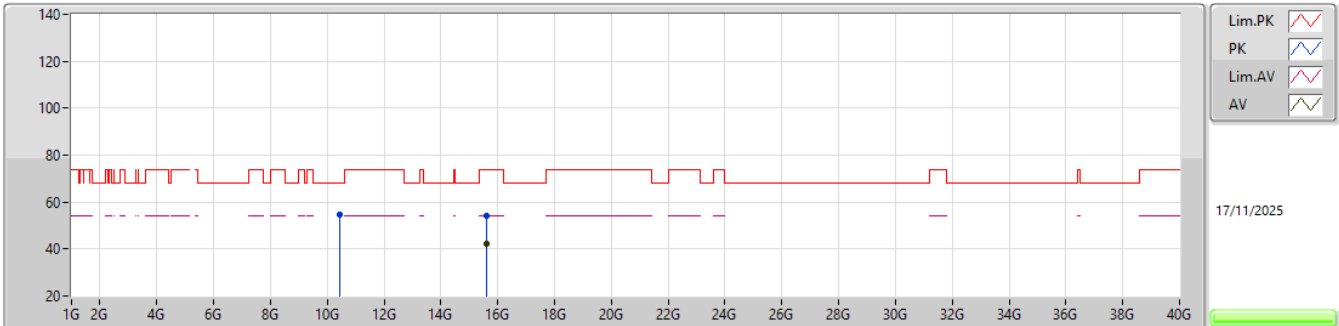EUT_Y_1TX
Setting 63
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4364G	54.88	68.20	-13.32	38.58	3	Horizontal	330	2.37	-	39.87	10.70	34.27			
PK	15.6188G	54.36	74.00	-19.64	36.79	3	Horizontal	227	1.06	-	38.49	13.63	34.55			
AV	15.6127G	42.04	54.00	-11.96	24.46	3	Horizontal	227	1.06	-	38.52	13.62	34.56			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_1TX

5290MHz_TX

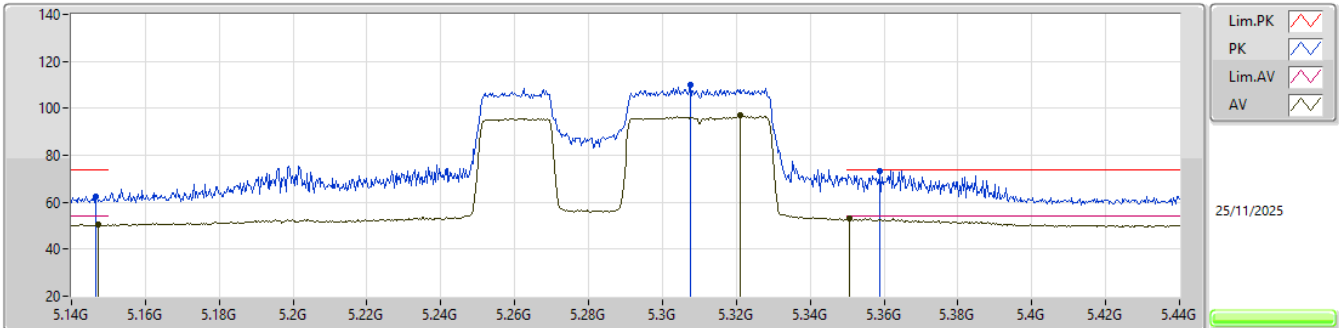

EUT V_1TX
Setting 62
02-D-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1466G	62.40	74.00	-11.60	51.36	3	Vertical	5	1.78	-	33.59	7.58	30.13			
AV	5.1472G	50.50	54.00	-3.50	39.46	3	Vertical	5	1.78	-	33.59	7.58	30.13			
PK	5.3077G	109.76	Inf	-Inf	98.48	3	Vertical	5	1.78	-	33.82	7.67	30.21			
AV	5.3212G	96.82	Inf	-Inf	85.52	3	Vertical	5	1.78	-	33.84	7.68	30.22			
PK	5.359G	73.40	74.00	-0.60	62.03	3	Vertical	5	1.78	-	33.90	7.71	30.24			
AV	5.3506G	52.94	54.00	-1.06	41.57	3	Vertical	5	1.78	-	33.90	7.70	30.23			