




RADIO TEST REPORT

FCC ID : QXO-AP5060
Equipment : Access Point
Brand Name : Extreme Networks
Model Name : AP5060D
Applicant : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina
United States 27560
Manufacturer : Extreme Networks, Inc.
2121 RDU Center Drive Morrisville North Carolina
United States 27560
Standard : 47 CFR FCC Part 15.407

The product was received on Jul. 28, 2025, and testing was started from Sep. 17, 2025 and completed on Dec. 23, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

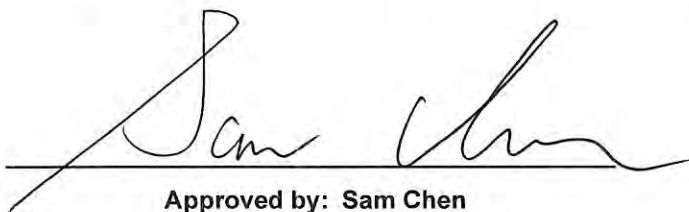

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	24
1.3 Testing Location Information	24
1.4 Measurement Uncertainty	24
2 Test Configuration of EUT.....	25
2.1 Test Channel Mode	25
2.2 The Worst Case Measurement Configuration.....	28
2.3 EUT Operation during Test	31
2.4 Accessories	31
2.5 Support Equipment.....	31
2.6 Test Setup Diagram	32
3 Transmitter Test Result	33
3.1 Peak Power Spectral Density (E.I.R.P.)	33
3.2 Unwanted Emissions.....	36
4 Test Equipment and Calibration Data	40
Appendix A. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix B. Test Results of Unwanted Emissions	
Appendix C. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.3	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.2	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.

Reviewed by: Sam Chen**Report Producer: Cathy Chiu**



1 General Description

1.1 Information

1.1.1 RF General Information

For Radio 1:

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
6525-6875	ax (HEW20), be (EHT20)	6595-6855	129-181 [14]
6525-6875	ax (HEW40), be (EHT40)	6605-6845	131-179 [7]
6525-6875	ax (HEW80), be (EHT80)	6625-6785	135-167 [3]
6525-6875	ax (HEW160), be (EHT160)	6665	143 [1]

For Radio 3 and For Scanning Radio 4:

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-6425	ax (HEW20), be (EHT20)	5955-6415	1-93 [24]
6525-6875		6535-6855	117-181 [17]
5925-6425	ax (HEW40), be (EHT40)	5965-6405	3-91 [12]
6525-6875		6565-6845	123-179 [8]
5925-6425	ax (HEW80), be (EHT80)	5985-6385	7-87 [6]
6525-6875		6625-6785	135-167 [3]
5925-6425	ax (HEW160), be (EHT160)	6025-6345	15-79 [3]
6525-6875		6665	143 [1]
5925-6425	be (EHT320)	6105	31 [1]

**For Radio 1:**

Band	Mode	BWch (MHz)	Nant
6.525-6.875GHz	802.11 ax HEW20, 802.11 be EHT20	20	1, 2, 4TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2, 4TX
	802.11 ax HEW40, 802.11 be EHT40	40	1, 2, 4TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2, 4TX
	802.11 ax HEW80, 802.11 be EHT80	80	1, 2, 4TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2, 4TX
	802.11 ax HEW160, 802.11 be EHT160	160	1, 2, 4TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2, 4TX

**For Radio 3:**

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11 ax HEW20, 802.11 be EHT20	20	1, 2, 4TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2, 4TX
	802.11 ax HEW40, 802.11 be EHT40	40	1, 2, 4TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2, 4TX
	802.11 ax HEW80, 802.11 be EHT80	80	1, 2, 4TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2, 4TX
	802.11 ax HEW160, 802.11 be EHT160	160	1, 2, 4TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2, 4TX
	802.11 be EHT320	320	1, 2, 4TX
	802.11 be EHT320-BF	320	2, 4TX
6.525-6.875GHz	802.11 ax HEW20, 802.11 be EHT20	20	1, 2, 4TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2, 4TX
	802.11 ax HEW40, 802.11 be EHT40	40	1, 2, 4TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2, 4TX
	802.11 ax HEW80, 802.11 be EHT80	80	1, 2, 4TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2, 4TX
	802.11 ax HEW160, 802.11 be EHT160	160	1, 2, 4TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2, 4TX

**For Scanning Radio 4:**

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ax HEW160, 802.11 be EHT160	160	2TX
	802.11 be EHT320	320	2TX
6.525-6.875GHz	802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ax HEW160, 802.11 be EHT160	160	2TX

**MRU (static preamble puncturing)
For Multi RU/Puncturing:**

RU-tone	Configuration	Bandwidth (MHz)				6GHz Test CH
		80				UNII-5 CH7
484+242	1		242	484		--
	2	242		484		V
	3		484		242	V
	4		484		242	V

RU-tone	Configuration	Bandwidth (MHz)				6GHz Test CH
		160				UNII-5 CH15
996+484	1		484	996		--
	2	484		996		V
	3		996		484	V
	4		996		484	V
996+484+242	1		242	484	996	--
	2	242		484	996	V
	3		484		996	V
	4		484	242	996	V
	5		996		242	V
	6		996		484	V
	7		996	484		V
	8		996	484	242	V

RU-tone	Configuration	Bandwidth (MHz)				6GHz Test CH
		320				UNII-5 CH31
2×996+484	1		484	996	996	--
	2	484		996	996	V
	3		996		484	V
	4		996	484	996	V
	5		996	996		V
	6		996	996	484	V
	7			484	996	--
	8		484		996	--
	9			996		--
	10			996	484	--
	11			996	996	--
	12			996	996	--
3×996	1			996	996	--
	2		996		996	V
	3		996		996	V
	4		996		996	V
3×996+484	1		484	996	996	--
	2	484		996	996	V
	3		996		484	V
	4		996	484	996	V
	5		996	996		V
	6		996	996	484	V
	7		996	996		V
	8		996	996	484	V

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.

**1.1.2 Worst case of MRU(static preamble puncturing) evaluation procedure**

1. Complete test Full RU BE & PSD
2. Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration.
4. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated BE/RSE testing.
5. Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 2 & 4 is the same. If there is a channel where the setting drops due to the test in step 4, the MRU(static preamble puncturing) conducted PSD needs to be retested.
6. Use worst configuration of MRU(static preamble puncturing) and perform MASK measurements by conducted method .



1.1.3 Antenna Information

Set	Ant.	Port							Brand Name	Model Name	Antenna Type	Connector	Gain (dBi)
		WLAN 2.4GHz (Radio 1)	WLAN 5GHz, 6GHz (Radio 1)	WLAN 5GHz (Radio 2)	WLAN 6GHz (Radio 3)	WLAN 2.4GHz, 5GHz, 6GHz (Scanning Radio 4)	Bluetooth / IEEE802.15.4 (Radio 5)	GPS (Radio 6)					
1	1	-	1	-	-	-	-	-	WNC	95XPAM15.G25	Patch	I-PEX	Note 1
	2	-	2	-	-	-	-	-	WNC	95XPAM15.G26	Patch	I-PEX	
	3	-	3	-	-	-	-	-	WNC	95XPAM15.G27	Patch	I-PEX	
	4	-	4	-	-	-	-	-	WNC	95XPAM15.G28	Patch	I-PEX	
2	5	-	1	-	-	-	-	-	WNC	95XPAM15.G29	Patch	I-PEX	
	6	-	2	-	-	-	-	-	WNC	95XPAM15.G29	Patch	I-PEX	
	7	-	3	-	-	-	-	-	WNC	95XPAM15.G29	Patch	I-PEX	
	8	-	4	-	-	-	-	-	WNC	95XPAM15.G29	Patch	I-PEX	
3	9	1	-	-	-	-	-	-	WNC	95XPAM15.G19	Patch	I-PEX	
	10	2	-	-	-	-	-	-	WNC	95XPAM15.G19	Patch	I-PEX	
	11	3	-	-	-	-	-	-	WNC	95XPAM15.G20	Patch	I-PEX	
	12	4	-	-	-	-	-	-	WNC	95XPAM15.G20	Patch	I-PEX	
4	13	-	-	1	-	-	-	-	WNC	95XPAM15.G23	Patch	I-PEX	
	14	-	-	2	-	-	-	-	WNC	95XPAM15.G23	Patch	I-PEX	
	15	-	-	3	-	-	-	-	WNC	95XPAM15.G23	Patch	I-PEX	
	16	-	-	4	-	-	-	-	WNC	95XPAM15.G23	Patch	I-PEX	
5	17	-	-	1	-	-	-	-	WNC	95XPAM15.G21	Patch	I-PEX	
	18	-	-	2	-	-	-	-	WNC	95XPAM15.G21	Patch	I-PEX	
	19	-	-	3	-	-	-	-	WNC	95XPAM15.G22	Patch	I-PEX	
	20	-	-	4	-	-	-	-	WNC	95XPAM15.G22	Patch	I-PEX	
6	21	-	-	-	1	-	-	-	WNC	95XPAM15.G33	Patch	I-PEX	
	22	-	-	-	2	-	-	-	WNC	95XPAM15.G33	Patch	I-PEX	
	23	-	-	-	3	-	-	-	WNC	95XPAM15.G34	Patch	I-PEX	
	24	-	-	-	4	-	-	-	WNC	95XPAM15.G34	Patch	I-PEX	
7	25	-	-	-	1	-	-	-	WNC	95XPAM15.G31	Patch	I-PEX	
	26	-	-	-	2	-	-	-	WNC	95XPAM15.G31	Patch	I-PEX	
	27	-	-	-	3	-	-	-	WNC	95XPAM15.G32	Patch	I-PEX	
	28	-	-	-	4	-	-	-	WNC	95XPAM15.G32	Patch	I-PEX	



8	29	-	-	-	-	1	-	-	WNC	95XPAM15.G35	Dipole	I-PEX	Note 1
	30	-	-	-	-	2	-	-	WNC	95XPAM15.G36	Dipole	I-PEX	
9	31	-	-	-	-	-	2	-	WNC	95XPAM15.G37	Metal PIFA	I-PEX	
	32	-	-	-	-	-	3	-	WNC	95XPAM15.G38	Metal PIFA	I-PEX	
	33	-	-	-	-	-	1	-	WNC	95XPAM15.G39	Metal PIFA	I-PEX	
10	34	-	-	-	-	-	-	1	WNC	95XPAM15.G40	Metal PIFA	I-PEX	

Note 1:

Set	Ant.	Antenna Gain (dBi)									
		WLAN 2.4GHz (Radio 1)	WLAN 5GHz, 6GHz (Radio 1)		WLAN 5GHz (Radio 2)	WLAN 6GHz (Radio 3)	WLAN 2.4GHz, 5GHz, 6GHz (Scanning Radio 4)			Bluetooth / IEEE802.15.4 (Radio 5)	GPS (Radio 6)
			UNII 1~3	UNII 5~8	UNII 1~3	UNII 5~8	2.4GHz	UNII 1~3	UNII 5~8		
1	1	-	6.4	7.4	-	-	-	-	-	-	-
	2	-	7.3	7.5	-	-	-	-	-	-	-
	3	-	6.1	6.3	-	-	-	-	-	-	-
	4	-	7.7	6.8	-	-	-	-	-	-	-
2	5	-	10.6	10.9	-	-	-	-	-	-	-
	6	-	10.3	10.8	-	-	-	-	-	-	-
	7	-	10.4	10.8	-	-	-	-	-	-	-
	8	-	10.8	11	-	-	-	-	-	-	-
3	9	6.8	-	-	-	-	-	-	-	-	-
	10	7.3	-	-	-	-	-	-	-	-	-
	11	7.0	-	-	-	-	-	-	-	-	-
	12	7.9	-	-	-	-	-	-	-	-	-
4	13	-	-	-	10.1	-	-	-	-	-	-
	14	-	-	-	10.1	-	-	-	-	-	-
	15	-	-	-	10.2	-	-	-	-	-	-
	16	-	-	-	10.1	-	-	-	-	-	-
5	17	-	-	-	7.4	-	-	-	-	-	-
	18	-	-	-	7.6	-	-	-	-	-	-
	19	-	-	-	7.0	-	-	-	-	-	-
	20	-	-	-	7.5	-	-	-	-	-	-
6	21	-	-	-	-	11.1	-	-	-	-	-
	22	-	-	-	-	10.4	-	-	-	-	-
	23	-	-	-	-	10.6	-	-	-	-	-
	24	-	-	-	-	10.4	-	-	-	-	-
7	25	-	-	-	-	6.1	-	-	-	-	-
	26	-	-	-	-	5.6	-	-	-	-	-
	27	-	-	-	-	5.5	-	-	-	-	-
	28	-	-	-	-	5.4	-	-	-	-	-
8	29	-	-	-	-	-	8.2	7.6	8.8	-	-
	30	-	-	-	-	-	6.2	8.1	8.7	-	-
9	31	-	-	-	-	-	-	-	-	4.8	-
	32	-	-	-	-	-	-	-	-	3.3	-
	33	-	-	-	-	-	-	-	-	5.3	-
10	34	-	-	-	-	-	-	-	-	-	3.4



Set	Ant.	Cable loss (dB)				
		WLAN 2.4GHz (Radio 1)	WLAN 5GHz, 6GHz (Radio 1)		WLAN 5GHz (Radio 2)	WLAN 6GHz (Radio 3)
			UNII 1-3	UNII 5-8	UNII 1-3	UNII 5-8
1	1	-	2.94	2.94	-	-
	2	-	2.94	2.94	-	-
	3	-	2.94	2.94	-	-
	4	-	2.94	2.94	-	-
2	5	-	3.02	3.02	-	-
	6	-	3.02	3.02	-	-
	7	-	3.02	3.02	-	-
	8	-	3.02	3.02	-	-
3	9	1.83	-	-	-	-
	10	1.83	-	-	-	-
	11	1.83	-	-	-	-
	12	1.83	-	-	-	-
4	13	-	-	-	3.95	-
	14	-	-	-	3.95	-
	15	-	-	-	3.95	-
	16	-	-	-	3.95	-
5	17	-	-	-	3.84	-
	18	-	-	-	3.84	-
	19	-	-	-	3.84	-
	20	-	-	-	3.84	-
6	21	-	-	-	-	3.91
	22	-	-	-	-	3.91
	23	-	-	-	-	3.91
	24	-	-	-	-	3.91
7	25	-	-	-	-	4.13
	26	-	-	-	-	4.13
	27	-	-	-	-	4.13
	28	-	-	-	-	4.13
8	29	-	-	-	-	-
	30	-	-	-	-	-
9	31	-	-	-	-	-
	32	-	-	-	-	-
	33	-	-	-	-	-
10	34	-	-	-	-	-



Set	Ant.	Net Gain (dBi)									
		WLAN 2.4GHz (Radio 1)	WLAN 5GHz, 6GHz (Radio 1)		WLAN 5GHz (Radio 2)	WLAN 6GHz (Radio 3)	WLAN 2.4GHz, 5GHz, 6GHz (Scanning Radio 4)			Bluetooth / IEEE802.15.4 (Radio 5)	GPS (Radio 6)
			UNII 1~3	UNII 5~8	UNII 1~3	UNII 5~8	2.4GHz	UNII 1~3	UNII 5~8		
1	1	-	3.46	4.46	-	-	-	-	-	-	-
	2	-	4.36	4.56	-	-	-	-	-	-	-
	3	-	3.16	3.36	-	-	-	-	-	-	-
	4	-	4.76	3.86	-	-	-	-	-	-	-
2	5	-	7.58	7.88	-	-	-	-	-	-	-
	6	-	7.28	7.78	-	-	-	-	-	-	-
	7	-	7.38	7.78	-	-	-	-	-	-	-
	8	-	7.78	7.98	-	-	-	-	-	-	-
3	9	4.97	-	-	-	-	-	-	-	-	-
	10	5.47	-	-	-	-	-	-	-	-	-
	11	5.17	-	-	-	-	-	-	-	-	-
	12	6.07	-	-	-	-	-	-	-	-	-
4	13	-	-	-	6.15	-	-	-	-	-	-
	14	-	-	-	6.15	-	-	-	-	-	-
	15	-	-	-	6.25	-	-	-	-	-	-
	16	-	-	-	6.15	-	-	-	-	-	-
5	17	-	-	-	3.56	-	-	-	-	-	-
	18	-	-	-	3.76	-	-	-	-	-	-
	19	-	-	-	3.16	-	-	-	-	-	-
	20	-	-	-	3.66	-	-	-	-	-	-
6	21	-	-	-	-	7.19	-	-	-	-	-
	22	-	-	-	-	6.49	-	-	-	-	-
	23	-	-	-	-	6.69	-	-	-	-	-
	24	-	-	-	-	6.49	-	-	-	-	-
7	25	-	-	-	-	1.97	-	-	-	-	-
	26	-	-	-	-	1.47	-	-	-	-	-
	27	-	-	-	-	1.37	-	-	-	-	-
	28	-	-	-	-	1.27	-	-	-	-	-
8	29	-	-	-	-	-	8.2	7.6	8.8	-	-
	30	-	-	-	-	-	6.2	8.1	8.7	-	-
9	31	-	-	-	-	-	-	-	-	4.8	-
	32	-	-	-	-	-	-	-	-	3.3	-
	33	-	-	-	-	-	-	-	-	5.3	-
10	34	-	-	-	-	-	-	-	-	-	3.4

Note 2: The EUT has ten sets of antennas.

Note 3:

The antenna sets 1, 3, 5, 7, 8 are used for Wide Beam: 70 degree.

The antenna sets 2, 4, 6 are used for Narrow Beam: 20 degree.

Note 4: Only the highest gain antenna was selected to test and record in this report. Thus, Ant. 33 was selected to perform the test for Radio 5_Bluetooth / IEEE802.15.4.

Note 5: The 6GHz UNII 6, 8 are not enabled for Radio 1, 3, and Scanning Radio 4 at this time.

Note 6: The above information was declared by manufacturer.

Note 7: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} g_{j,k} \right]^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} g_{j,k} \right]^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} g_{j,k} \right]^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} g_{j,k} \right]^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,2) = 10^{G3/20} ; NSS1(g1,2) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

Radio 1

2.4G

G1= 4.97 dBi ; G2= 5.47 dBi ; G3= 5.17 dBi ; G4= 6.07 dBi ;

2T1S DG= 8.23dBi; 2T2S DG= 5.23dBi; 4T1S DG= 11.45dBi; 4T4S DG= 5.44dBi;

Narrow (20°)

5G UNII-1

G1= 7.58 dBi ; G2= 7.28 dBi ; G3= 7.38 dBi ; G4= 7.78 dBi ;

2T1S DG= 10.44dBi; 2T2S DG= 7.43dBi; 4T1S DG= 13.53dBi; 4T4S DG= 7.51dBi;

5G UNII-2A

G1= 7.58 dBi ; G2= 7.28 dBi ; G3= 7.38 dBi ; G4= 7.78 dBi ;

2T1S DG= 10.44dBi; 2T2S DG= 7.43dBi; 4T1S DG= 13.53dBi; 4T4S DG= 7.51dBi;

Wide (70°)

5G UNII-1 G1= 3.46 dBi ; G2= 4.36 dBi ; G3= 3.16 dBi ; G4= 4.76 dBi ;

2T1S DG= 6.93dBi; 2T2S DG= 3.93dBi; 4T1S DG= 9.98dBi; 4T4S DG= 3.98dBi;

5G UNII-2A G1= 3.46 dBi ; G2= 4.36 dBi ; G3= 3.16 dBi ; G4= 4.76 dBi ;

2T1S DG= 6.93dBi; 2T2S DG= 3.93dBi; 4T1S DG= 9.98dBi; 4T4S DG= 3.98dBi;

**Narrow (20°)**

6G UNII-7 G1= 7.88 dBi ; G2= 7.78 dBi ; G3= 7.78 dBi ; G4= 7.98 dBi ;

2T1S DG= 10.84dBi; 2T2S DG= 7.83dBi; 4T1S DG= 13.88dBi; 4T4S DG= 7.86dBi

6G UNII-8 G1= 7.88 dBi ; G2= 7.78 dBi ; G3= 7.78 dBi ; G4= 7.98 dBi ;

2T1S DG= 10.84dBi; 2T2S DG= 7.83dBi; 4T1S DG= 13.88dBi; 4T4S DG= 7.86dBi

Wide(70°)

6G UNII-7 G1= 4.46 dBi ; G2= 4.56 dBi ; G3= 3.36 dBi ; G4= 3.86 dBi ;

2T1S DG= 7.52dBi; 2T2S DG= 4.51dBi; 4T1S DG= 10.09dBi; 4T4S DG= 4.09dBi

6G UNII-8 G1= 4.46 dBi ; G2= 4.56 dBi ; G3= 3.36 dBi ; G4= 3.86 dBi ;

2T1S DG= 7.52dBi; 2T2S DG= 4.51dBi; 4T1S DG= 10.09dBi; 4T4S DG= 4.09dBi

Radio 2**Narrow (20°)****5G UNII-1**

G1= 6.15 dBi ; G2= 6.15 dBi ; G3= 6.25 dBi ; G4= 6.15 dBi ;

2T1S DG= 9.16dBi; 2T2S DG= 6.15dBi; 4T1S DG= 12.20dBi; 4T4S DG= 6.18dBi;

5G UNII-2A

G1= 6.15 dBi ; G2= 6.15 dBi ; G3= 6.25 dBi ; G4= 6.15 dBi ;

2T1S DG= 9.16dBi; 2T2S DG= 6.15dBi; 4T1S DG= 12.20dBi; 4T4S DG= 6.18dBi;

5G UNII-2C

G1= 6.15 dBi ; G2= 6.15 dBi ; G3= 6.25 dBi ; G4= 6.15 dBi ;

2T1S DG= 9.16dBi; 2T2S DG= 6.15dBi; 4T1S DG= 12.20dBi; 4T4S DG= 6.18dBi;

5G UNII-3

G1= 6.15 dBi ; G2= 6.15 dBi ; G3= 6.25 dBi ; G4= 6.15 dBi ;

2T1S DG= 9.16dBi; 2T2S DG= 6.15dBi; 4T1S DG= 12.20dBi; 4T4S DG= 6.18dBi;

Wide (70°)**5G UNII-1**

G1= 3.56 dBi ; G2= 3.76 dBi ; G3= 3.16 dBi ; G4= 3.66 dBi

2T1S DG= 6.67dBi; 2T2S DG= 3.66dBi; 4T1S DG= 9.56dBi; 4T4S DG= 3.54dBi;

**5G UNII-2A**

G1= 3.56 dBi ; G2= 3.76 dBi ; G3= 3.16 dBi ; G4= 3.66 dBi

2T1S DG= 6.67dBi; 2T2S DG= 3.66dBi; 4T1S DG= 9.56dBi; 4T4S DG= 3.54dBi;

5G UNII-2C

G1= 3.56 dBi ; G2= 3.76 dBi ; G3= 3.16 dBi ; G4= 3.66 dBi

2T1S DG= 6.67dBi; 2T2S DG= 3.66dBi; 4T1S DG= 9.56dBi; 4T4S DG= 3.54dBi;

5G UNII-3

G1= 3.56 dBi ; G2= 3.76 dBi ; G3= 3.16 dBi ; G4= 3.66 dBi

2T1S DG= 6.67dBi; 2T2S DG= 3.66dBi; 4T1S DG= 9.56dBi; 4T4S DG= 3.54dBi;

Radio3**Narrow (20°)**

6G UNII-5 G1= 7.19 dBi ; G2= 6.49 dBi ; G3= 6.69 dBi ; G4= 6.49 dBi ;

2T1S DG= 9.86dBi; 2T2S DG= 6.85dBi; 4T1S DG= 12.74dBi; 4T4S DG= 6.72dBi

6G UNII-6 G1= 7.19 dBi ; G2= 6.49 dBi ; G3= 6.69 dBi ; G4= 6.49 dBi ;

2T1S DG= 9.86dBi; 2T2S DG= 6.85dBi; 4T1S DG= 12.74dBi; 4T4S DG= 6.72dBi

6G UNII-7 G1= 7.19 dBi ; G2= 6.49 dBi ; G3= 6.69 dBi ; G4= 6.49 dBi ;

2T1S DG= 9.86dBi; 2T2S DG= 6.85dBi; 4T1S DG= 12.74dBi; 4T4S DG= 6.72dBi

6G UNII-8 G1= 7.19 dBi ; G2= 6.49 dBi ; G3= 6.69 dBi ; G4= 6.49 dBi ;

2T1S DG= 9.86dBi; 2T2S DG= 6.85dBi; 4T1S DG= 12.74dBi; 4T4S DG= 6.72dBi

Wide(70°)

6G UNII-5 G1= 1.97 dBi ; G2= 1.47 dBi ; G3= 1.37 dBi ; G4= 1.27 dBi ;

2T1S DG= 4.73dBi; 2T2S DG= 1.73dBi; 4T1S DG= 7.54dBi; 4T4S DG= 1.53dBi

6G UNII-6 G1= 1.97 dBi ; G2= 1.47 dBi ; G3= 1.37 dBi ; G4= 1.27 dBi ;

2T1S DG= 4.73dBi; 2T2S DG= 1.73dBi; 4T1S DG= 7.54dBi; 4T4S DG= 1.53dBi

6G UNII-7 G1= 1.97 dBi ; G2= 1.47 dBi ; G3= 1.37 dBi ; G4= 1.27 dBi ;

2T1S DG= 4.73dBi; 2T2S DG= 1.73dBi; 4T1S DG= 7.54dBi; 4T4S DG= 1.53dBi

6G UNII-8 G1= 1.97 dBi ; G2= 1.47 dBi ; G3= 1.37 dBi ; G4= 1.27 dBi ;

2T1S DG= 4.73dBi; 2T2S DG= 1.73dBi; 4T1S DG= 7.54dBi; 4T4S DG= 1.53dBi

**Radio 4**

2.4G G1= 8.2 dBi ; G2= 6.2 dBi ;DG= 10.27dBi

2T1S DG= 10.27dBi; 2T2S DG= 7.31dBi;

5G UNII-1 G1= 7.6 dBi ; G2= 8.1 dBi ;

2T1S DG= 10.86dBi; 2T2S DG= 7.86dBi;

5G UNII-2A G1= 7.6 dBi ; G2= 8.1 dBi ;

2T1S DG= 10.86dBi; 2T2S DG= 7.86dBi;

5G UNII-2C G1= 7.6 dBi ; G2= 8.1 dBi ;

2T1S DG= 10.86dBi; 2T2S DG= 7.86dBi;

5G UNII-3 G1= 7.6 dBi ; G2= 8.1 dBi ;

2T1S DG= 10.86dBi; 2T2S DG= 7.86dBi;

6G UNII-5 G1= 8.8 dBi ; G2= 8.7 dBi ;

2T2S DG= 8.75dBi

6G UNII-6 G1= 8.8 dBi ; G2= 8.7 dBi ;

2T2S DG= 8.75dB

6G UNII-7 G1= 8.8 dBi ; G2= 8.7 dBi ;

2T2S DG= 8.75dB

6G UNII-8 G1= 8.8 dBi ; G2= 8.7 dBi ;

2T2S DG= 8.75dB

EUT operation mode:**For Radio 1****For 2.4GHz:****For IEEE 802.11b/g/n/VHT/ax/be mode (1TX, 2TX, 4TX/4RX):****1TX**

Only Port 1 can be use as transmitting antenna.

2TX

Port 1, Port 2 can be use as transmitting antenna.

Port 1, Port 2 could transmitting simultaneously.

4TX

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

4RX

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3, Port 4 could receive simultaneously.

For 5GHz:**For IEEE 802.11a/n/ac/ax/be mode (1TX, 2TX, 4TX/4RX):****1TX**

Only Port 1 can be use as transmitting antenna.

2TX

Port 1, Port 2 can be use as transmitting antenna.

Port 1, Port 2 could transmitting simultaneously.

**4TX**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.
Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

4RX

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.
Port 1, Port 2, Port 3, Port 4 could receive simultaneously.

For 6GHz:**For IEEE 802.11ax/be mode (1TX, 2TX, 4TX/4RX):****1TX**

Only Port 1 can be use as transmitting antenna.

2TX

Port 1, Port 2 can be use as transmitting antenna.
Port 1, Port 2 could transmitting simultaneously.

4TX

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.
Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

4RX

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.
Port 1, Port 2, Port 3, Port 4 could receive simultaneously.

For Radio 2**For 5GHz:****For IEEE 802.11a/n/ac/ax/be mode (1TX, 2TX, 4TX/4RX):****1TX**

Only Port 1 can be use as transmitting antenna.

2TX

Port 1, Port 2 can be use as transmitting antenna.
Port 1, Port 2 could transmitting simultaneously.

4TX

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.
Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

4RX

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.
Port 1, Port 2, Port 3, Port 4 could receive simultaneously.

For Radio 3**For 6GHz:****For IEEE 802.11ax/be mode (1TX, 2TX, 4TX/4RX):****1TX**

Only Port 1 can be use as transmitting antenna.

2TX

Port 1, Port 2 can be use as transmitting antenna.
Port 1, Port 2 could transmitting simultaneously.

4TX

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting antenna.
Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

4RX

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas.
Port 1, Port 2, Port 3, Port 4 could receive simultaneously.

For Scanning Radio 4**For 2.4GHz:****For IEEE 802.11b/g/n/VHT/ax/be mode (2TX/2RX):**

Port 1, Port 2 can be used as transmitting/receiving antenna.
Port 1, Port 2 could transmit/receive simultaneously.

**For 5GHz:****For IEEE 802.11a/n/ac/ax/be mode (2TX/2RX):**

Port 1, Port 2 can be used as transmitting/receiving antenna.

Port 1, Port 2 could transmit/receive simultaneously.

For 6GHz:**For IEEE 802.11ax/be mode (2TX/2RX):**

Port 1, Port 2 can be used as transmitting/receiving antenna.

Port 1, Port 2 could transmit/receive simultaneously.

For Radio 5**Bluetooth / IEEE802.15.4 (1TX/1RX):**

The EUT supports the antenna with TX and RX diversity functions.

Port 1, Port 2, Port 3 support transmit and receive functions, but only one of them will be used at one time.

For Radio 6**GPS (1RX):**

Only Port 1 can be used as receiving antenna.

1.1.4 Mode Test Duty Cycle**For Multi_RU/Puncturing:****For Radio 3_set 6:**

Mode	DC	DCF (dB)	T (s)	VBW (Hz) 1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242	0.974	0.11	998.594u	2k
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242	0.968	0.14	998.594u	2k
802.11be EHT160_Nss1,(MCS0),RU996+RU484	0.968	0.14	998.594u	2k
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484	0.969	0.14	998.594u	2k
802.11be EHT320_Nss1,(MCS0),3xRU996	0.969	0.14	998.594u	2k
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484	0.969	0.14	998.594u	2k
802.11be EHT80_Nss2,(MCS0),RU484+RU242	0.968	0.14	996.25u	2k
802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242	0.969	0.14	996.25u	2k
802.11be EHT160_Nss2,(MCS0),RU996+RU484	0.971	0.13	996.25u	2k
802.11be EHT320_Nss2,(MCS0),3xRU996+RU484	0.969	0.14	996.25u	2k
802.11be EHT320_Nss2,(MCS0),3xRU996	0.969	0.14	996.25u	2k
802.11be EHT320_Nss2,(MCS0),2xRU996+RU484	0.974	0.11	998.594u	2k
802.11be EHT80_Nss4,(MCS0),RU484+RU242	0.968	0.14	998.594u	2k
802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242	0.968	0.14	998.594u	2k
802.11be EHT160_Nss4,(MCS0),RU996+RU484	0.969	0.14	998.594u	2k
802.11be EHT320_Nss4,(MCS0),3xRU996+RU484	0.969	0.14	998.594u	2k

**For Radio 3_set 7:**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242	0.974	0.11	998.594u	2k
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242	0.968	0.14	998.594u	2k
802.11be EHT160_Nss1,(MCS0),RU996+RU484	0.968	0.14	998.594u	2k
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484	0.969	0.14	998.594u	2k
802.11be EHT320_Nss1,(MCS0),3xRU996	0.969	0.14	998.594u	2k
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484	0.969	0.14	998.594u	2k
802.11be EHT80_Nss2,(MCS0),RU484+RU242	0.968	0.14	996.25u	2k
802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242	0.969	0.14	996.25u	2k
802.11be EHT160_Nss2,(MCS0),RU996+RU484	0.971	0.13	996.25u	2k
802.11be EHT320_Nss2,(MCS0),3xRU996+RU484	0.969	0.14	996.25u	2k
802.11be EHT320_Nss2,(MCS0),3xRU996	0.969	0.14	996.25u	2k
802.11be EHT320_Nss2,(MCS0),2xRU996+RU484	0.974	0.11	998.594u	2k
802.11be EHT80_Nss4,(MCS0),RU484+RU242	0.968	0.14	998.594u	2k
802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242	0.968	0.14	998.594u	2k
802.11be EHT160_Nss4,(MCS0),RU996+RU484	0.969	0.14	998.594u	2k
802.11be EHT320_Nss4,(MCS0),3xRU996+RU484	0.969	0.14	998.594u	2k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.



1.1.5 EUT Operational Condition

EUT Power Type	From PoE	
Beamforming Function	☒ With beamforming	☐ Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz (Radio 1), n/ac/ax/be in 5GHz (Radio 1, 2) and ax/be in 6GHz (Radio 1, 3).	
Device Type	☐ Indoor Access Point	☐ Subordinate
	☐ Indoor Client	☒ Standard Power Access Point
	☐ Dual Client	☐ Standard Client
	☐ Fixed Client	☐ Very Low Power
Condition of EUT	☒ Indoor	☒ Outdoor
Channel Puncturing Function	☒ Supported Static Puncturing for Radio 3	
	☒ Supported Dynamic Puncturing (Reduce BW) for Radio 1, 3	
	☒ Unsupported for Scanning Radio 4	
	Note: The EUT doesn't support puncturing for CBP	
Support RU	☒ Full RU for Radio 1, 3 and Scanning Radio 4	☒ Partial RU for Radio 1, 3
Test Software Version	accessMtool 3.4.1.0	

Note: The above information was declared by manufacturer.

1.1.6 Table for EUT Support Function

Function	Support Type
AP	Master
Bridge	Master
Mesh	Master

Note: The above information was declared by manufacturer.

1.1.7 Table for Radio Function

Radio (R)	WLAN 2.4GHz	5GHz	Scanning radio (WLAN 2.4GHz / 5GHz / 6GHz)	6GHz	Bluetooth / IEEE802.15.4	GPS
R1	V (AP, Bridge, Mesh)	V (AP for UNII 1~2A, Bridge, Mesh for UNII 1)	-	V (AP for 6GHz UNII 7)	-	-
R2	-	V (AP for UNII 1~3 or UNII 2C~3 / Bridge, Mesh for UNII 3)	-	-	-	-
R3	-	-	-	V (AP for 6GHz UNII 5, 7 or UNII 5)	-	-
R4	-	-	V (AP, for 2.4GHz, 5GHz UNII 1~3, 6GHz UNII 5, 7)	-	-	-
R5	-	-	-	-	V	-
R6	-	-	-	-	-	V

Note: The above information was declared by manufacturer.

1.1.8 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR561916AE.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding 5GHz UNII 2A and UNII 2C (5250~5350 MHz, 5470~5725 MHz). 2. Adding 160MHz for 5GHz.	After evaluating, it does not affect the test result of this test report.
3. Adding the Multi_RU/Puncturing function for the device for 5GHz/6GHz.	1. Power Spectral Density 2. Unwanted Emissions above 1GHz 3. Emission MASK



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Owen Hsu	22~23.3 / 58~62	Sep. 17, 2025~ Dec. 09, 2025
Radiated above 1GHz	03CH02-CB	George Fan	21.5~23.3 / 58~61	Nov. 14, 2025~ Dec. 23, 2025
	03CH05-CB		21.5~22.9 / 57~60	

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Parameter	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

For Multi_RU/Puncturing:

For Radio 3_set 6:

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX
5985MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX
6025MHz
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX
6105MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX
6105MHz
802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX
5985MHz
802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX
6025MHz
802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX
6025MHz
802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX
6105MHz
802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX
6105MHz
802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX
6105MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX
5985MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX
6025MHz
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX
6105MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX
6105MHz
802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX
5985MHz
802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU 6_4TX
6025MHz
802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU 4_4TX



6025MHz
802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU 8_4TX
6105MHz
802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX
6105MHz
802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX
6105MHz

For Radio 3_set 7:

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX
5985MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX
6025MHz
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX
6105MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX
6105MHz
802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX
5985MHz
802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX
6025MHz
802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX
6025MHz
802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX
6105MHz
802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX
6105MHz
802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX
6105MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX
5985MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX
6025MHz
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX
6105MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX
6105MHz
802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX
5985MHz
802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU 6_4TX



6025MHz
802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU 4_4TX
6025MHz
802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU 8_4TX
6105MHz
802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX
6105MHz
802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX
6105MHz

Note:

- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Peak Power Spectral Density (E.I.R.P.)
Test Condition	Conducted measurement at transmit chains
1	Radio 3_set 6_Multi_RU/Puncturing
2	Radio 3_set 7_Multi_RU/Puncturing

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode > 1GHz	CTX
After evaluating, the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Y axis_Radio 3 (6GHz UNII 5, 7_set 6)_Multi_RU/Puncturing
2	EUT in Y axis_Radio 3 (6GHz UNII 5, 7_set 7)_Multi_RU/Puncturing

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains
1	Radio 3_set 6_Multi_RU/Puncturing
2	Radio 3_set 7_Multi_RU/Puncturing



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (2.4GHz_set 8)+R5 (Bluetooth)
2	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (2.4GHz_set 8)+R5 (IEEE 802.15.4)
3	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (5GHz_set 8)+R5 (Bluetooth)
4	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (5GHz_set 8)+R5 (IEEE 802.15.4)
5	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (6GHz_set 8)+R5 (Bluetooth)
6	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (6GHz_set 8)+R5 (IEEE 802.15.4)
7	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+Scanning R4 (2.4GHz_set 8)+R5 (Bluetooth)
8	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+Scanning R4 (2.4GHz_set 8)+R5 (IEEE 802.15.4)
9	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+Scanning R4 (5GHz_set 8)+R5 (Bluetooth)
10	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+Scanning R4 (5GHz_set 8)+R5 (IEEE 802.15.4)
11	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+Scanning R4 (6GHz_set 8)+R5 (Bluetooth)
12	R1 (2.4GHz_set 3)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+Scanning R4 (6GHz_set 8)+R5 (IEEE 802.15.4)
13	R1 (5GHz UNII 1~2A_set 1)+R2 (5GHz UNII 2C~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (2.4GHz_set 8)+R5 (Bluetooth)
14	R1 (5GHz UNII 1~2A_set 1)+R2 (5GHz UNII 2C~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (2.4GHz_set 8)+R5 (IEEE 802.15.4)
15	R1 (5GHz UNII 1~2A_set 1)+R2 (5GHz UNII 2C~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (5GHz_set 8)+R5 (Bluetooth)
16	R1 (5GHz UNII 1~2A_set 1)+R2 (5GHz UNII 2C~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (5GHz_set 8)+R5 (IEEE 802.15.4)
17	R1 (5GHz UNII 1~2A_set 1)+R2 (5GHz UNII 2C~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (6GHz_set 8)+R5 (Bluetooth)
18	R1 (5GHz UNII 1~2A_set 1)+R2 (5GHz UNII 2C~3_set 5)+R3 (6GHz UNII 5, 7_set 7)+Scanning R4 (6GHz_set 8)+R5 (IEEE 802.15.4)
19	R1 (5GHz UNII 1~2A_set 2)+R2 (5GHz UNII 2C~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+Scanning R4 (2.4GHz_set 8)+R5 (IEEE 802.15.4)



20	R1 (5GHz UNII 1~2A_set 2)+R2 (5GHz UNII 2C~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+ Scanning R4 (2.4GHz_set 8)+R5 (Bluetooth)
21	R1 (5GHz UNII 1~2A_set 2)+R2 (5GHz UNII 2C~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+ Scanning R4 (5GHz_set 8)+R5 (IEEE 802.15.4)
22	R1 (5GHz UNII 1~2A_set 2)+R2 (5GHz UNII 2C~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+ Scanning R4 (5GHz_set 8)+R5 (Bluetooth)
23	R1 (5GHz UNII 1~2A_set 2)+R2 (5GHz UNII 2C~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+ Scanning R4 (6GHz_set 8)+R5 (IEEE 802.15.4)
24	R1 (5GHz UNII 1~2A_set 2)+R2 (5GHz UNII 2C~3_set 4)+R3 (6GHz UNII 5, 7_set 6)+ Scanning R4 (6GHz_set 8)+R5 (Bluetooth)
25	R1 (6GHz UNII 7_set 1)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5_set 7)+ Scanning R4 (2.4GHz_set 8)+R5 (IEEE 802.15.4)
26	R1 (6GHz UNII 7_set 1)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5_set 7)+ Scanning R4 (2.4GHz_set 8)+R5 (Bluetooth)
27	R1 (6GHz UNII 7_set 1)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5_set 7)+ Scanning R4 (5GHz_set 8)+R5 (IEEE 802.15.4)
28	R1 (6GHz UNII 7_set 1)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5_set 7)+ Scanning R4 (5GHz_set 8)+R5 (Bluetooth)
29	R1 (6GHz UNII 7_set 1)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5_set 7)+ Scanning R4 (6GHz_set 8)+R5 (IEEE 802.15.4)
30	R1 (6GHz UNII 7_set 1)+R2 (5GHz UNII 1~3_set 5)+R3 (6GHz UNII 5_set 7)+ Scanning R4 (6GHz_set 8)+R5 (Bluetooth)
31	R1 (6GHz UNII 7_set 2)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5_set 6)+ Scanning R4 (2.4GHz_set 8)+R5 (IEEE 802.15.4)
32	R1 (6GHz UNII 7_set 2)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5_set 6)+ Scanning R4 (2.4GHz_set 8)+R5 (Bluetooth)
33	R1 (6GHz UNII 7_set 2)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5_set 6)+ Scanning R4 (5GHz_set 8)+R5 (IEEE 802.15.4)
34	R1 (6GHz UNII 7_set 2)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5_set 6)+ Scanning R4 (5GHz_set 8)+R5 (Bluetooth)
35	R1 (6GHz UNII 7_set 2)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5_set 6)+ Scanning R4 (6GHz_set 8)+R5 (IEEE 802.15.4)
36	R1 (6GHz UNII 7_set 2)+R2 (5GHz UNII 1~3_set 4)+R3 (6GHz UNII 5_set 6)+ Scanning R4 (6GHz_set 8)+R5 (Bluetooth)
Refer to Sporton Test Report No.: FA561916-02AA for Co-location RF Exposure Evaluation.	



Note 1: The following test mode table is only applicable to Radio 1, 3 and is declared by the manufacturer.
The Scanning Radio 4 is only tested in 2T2S for all test items, and 2T1S for power only as declared by the manufacturer.

Test Mode of Radio 1, 3							
Test Item	802.11be EHT20/40/80/160/320						
	1T1S	2T1S	TXBF 2T1S	2T2S	4T1S	TXBF 4T1S	4T4S
Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	V	Note2	V	V	V	V	V
Emission Bandwidth	V	-	-	V	V	-	V
Peak Power Spectral Density (E.I.R.P.)	V	-	-	V	V	-	V
Radiated Emission	V	-	-	V	V	-	V
Band Edge Emission	V	-	-	V	V	-	V

Note 2: 802.11be EHT20/40/80 2T1S CDD mode was covered by 802.11be EHT20/40/80/160 2T2S, due to CDD $2T1S = 2T2S - (10 \cdot \log(2/1))$.

Note 3: R means Radio ; BT means Bluetooth.

Note 4: The PoE is for measurement only, would not be marketed.

The information as below:

Power	Brand	Model
PoE	Microsemi	PD-9501-10GC/AC

2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories


Accessories
Bracket*1
Sealing Collar*2

2.5 Support Equipment

For Radiated above 1GHz (Multi_RU/Puncturing) and RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE	Microsemi	PD-9501-10GC/AC	N/A

2.6 Test Setup Diagram

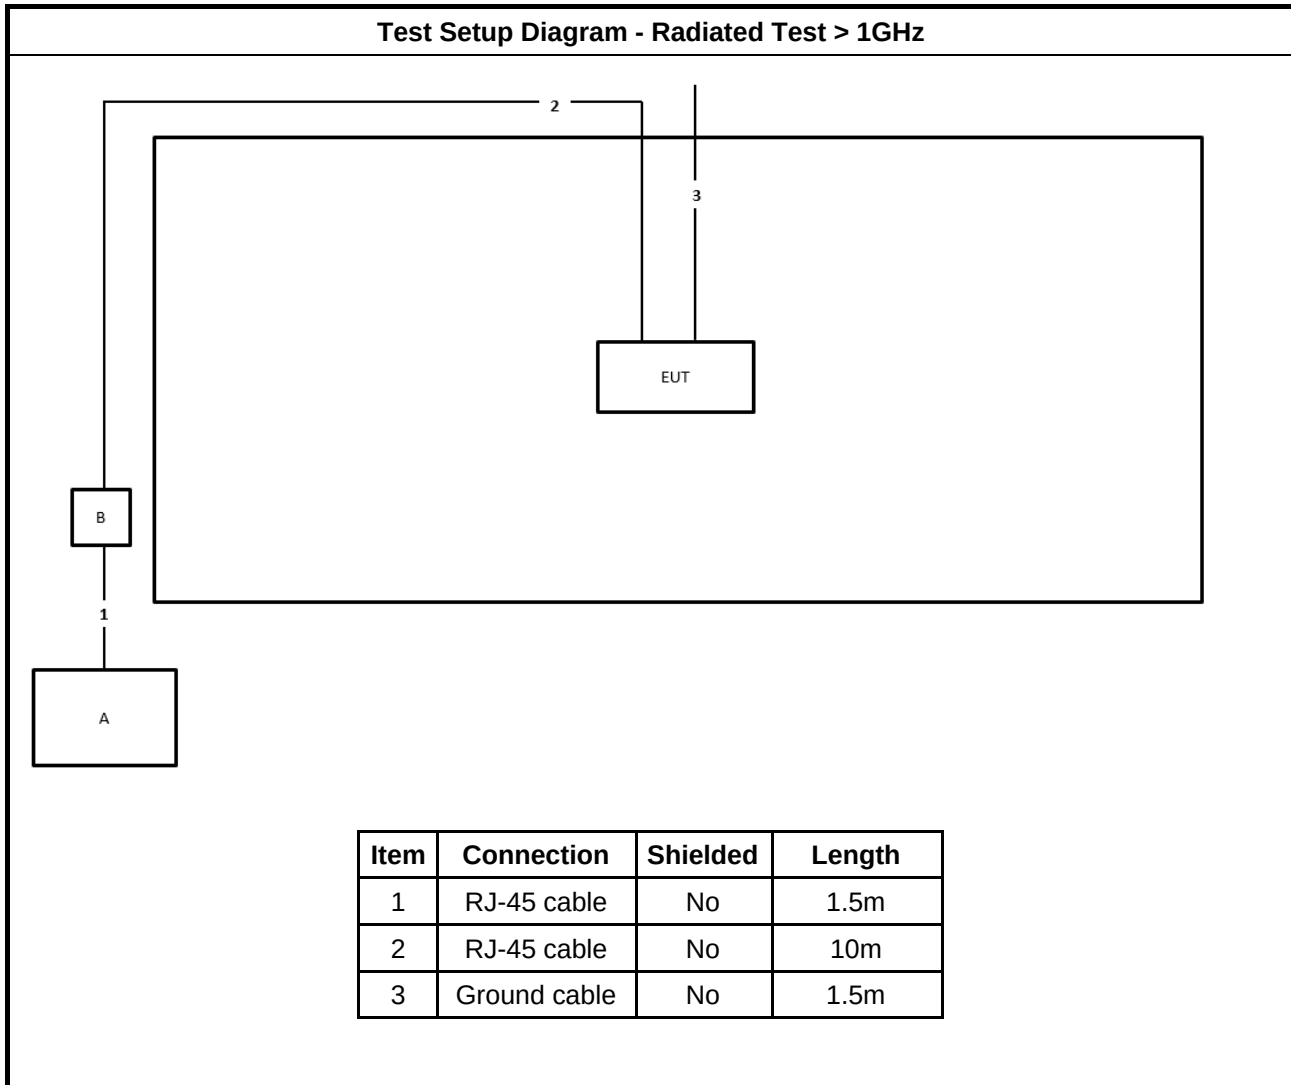



3 Transmitter Test Result

3.1 Peak Power Spectral Density (E.I.R.P.)

3.1.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.425 ~ 6.525 GHz band:	
	▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.875 ~ 7.125 GHz band:	
	▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	▪ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	▪ For low-power client devices < -1 dBm / MHz.
	▪ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	



- | |
|--|
| <ul style="list-style-type: none">▪ For standard-power access points & fixed client devices < 23 dBm / MHz. |
| <ul style="list-style-type: none">▪ For standard client devices < 17 dBm / MHz. |

3.1.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
▪ According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth [duty cycle ≥ 98% or external video / power trigger]
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
▪ If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm])	

Test Method	
	$EIRP_{total} = PPSD_{total} + DG$
☐	For radiated measurement.
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.1.4 Test Setup

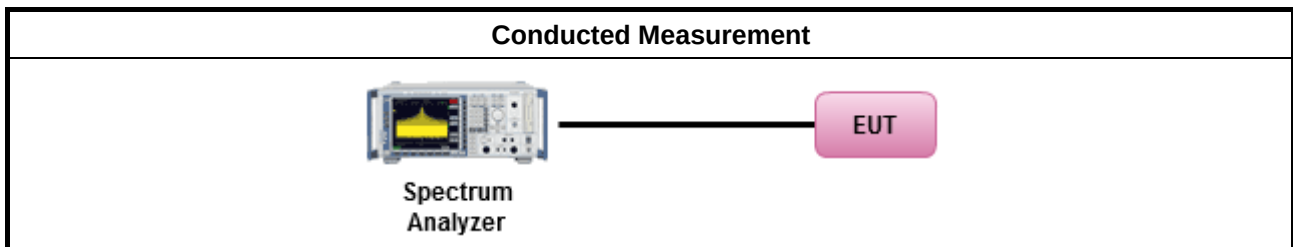

3.1.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix A



3.2 Unwanted Emissions

3.2.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

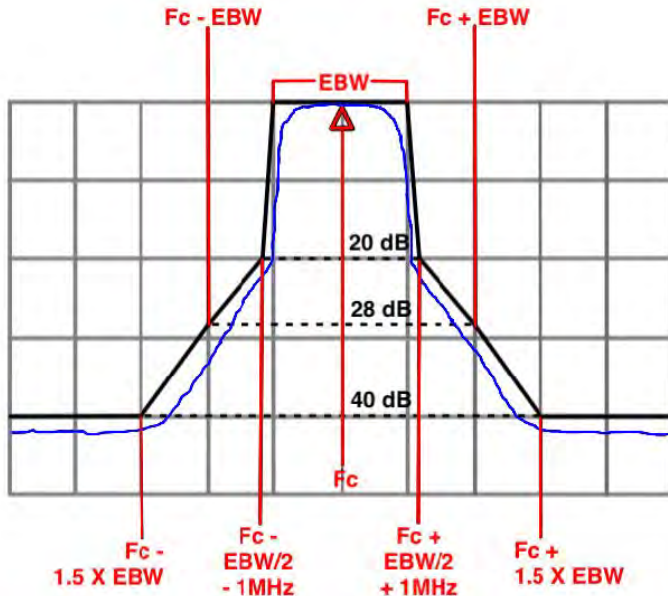Frequency	Emission MASK Limit
5.925 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 





3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.2.4 Test Setup

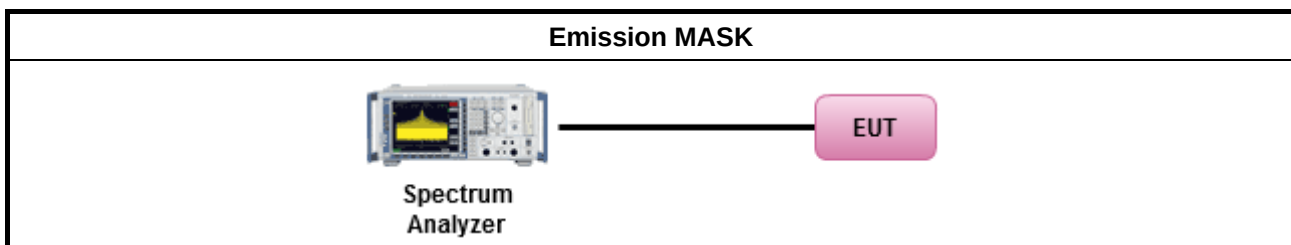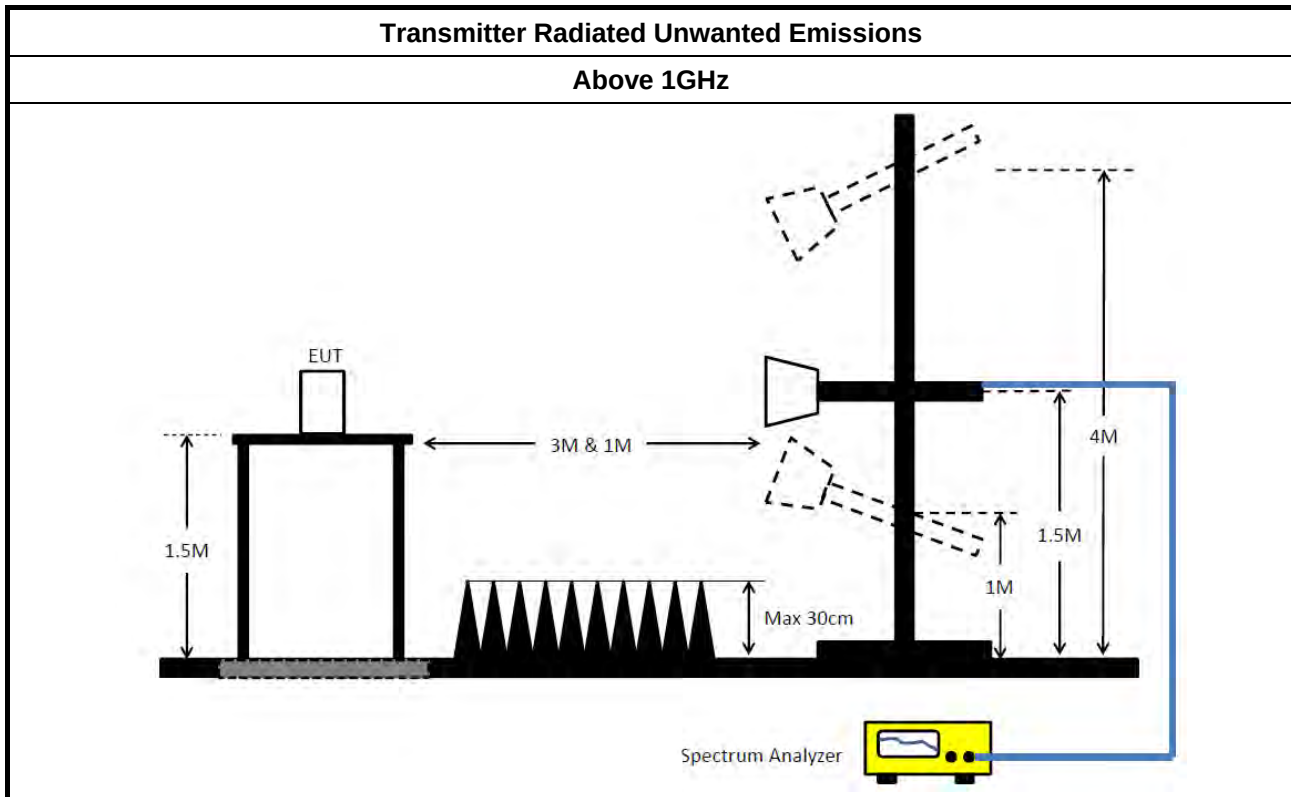

3.2.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.2.6 Test Result of Transmitter Unwanted Emissions

Refer as Appendix B



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 23, 2025	Mar. 22, 2026	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 15, 2025	Apr. 14, 2026	Radiation (03CH02-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH02-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 11, 2025	Mar. 10, 2026	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH5265	20240911-1	1~ 26.5GHz	Sep. 19, 2024	Sep. 18, 2025	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH5265	20240911-1	1~ 26.5GHz	Sep. 18, 2025	Sep. 17, 2026	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101320	9kHz ~ 44GHz	Aug. 07, 2025	Aug. 06, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 27, 2025	Sep. 26, 2026	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 06, 2025	Jun. 05, 2026	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 21, 2025	Apr. 20, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz~7.115GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 02, 2025	Jan. 01, 2026	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Power Divider	MTJ	2 Way	DF01-DV03	1GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH03-CB)
RF Power Divider	MTJ	2 Way	DF01-DV03	1GHz ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
RF Power Divider	MTJ	2 Way	DF01-DV02	1GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH03-CB)

**RADIO TEST REPORT****Report No. : FR561916-02AB**

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Power Divider	MTJ	2 Way	DF01-DV02	1GHz ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
RF Power Divider	MTJ	4 Way	DF01-DV01	1GHz ~ 6GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH03-CB)
RF Power Divider	MTJ	4 Way	DF01-DV01	1GHz ~ 6GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
RF Power Divider	Titan	2 Way	DV-8G -09	2GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH03-CB)
RF Power Divider	Titan	2 Way	DV-8G -09	2GHz ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

Test Mode: Mode 1

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX	1.04	8.23
802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX	3.98	10.83
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	6.65	19.39
802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX	6.43	13.15
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX	-0.97	6.22
802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX	1.00	7.85
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX	3.79	16.53
802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU 4_4TX	4.28	11.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX	-2.95	4.24
802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX	-1.45	5.40
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	1.21	13.95
802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU 8_4TX	1.46	8.18

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.19	1.04				1.04	8.23	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.19	-0.97				-0.97	6.22	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.19	-1.09				-1.09	6.10	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.19	-2.96				-2.96	4.23	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.19	-3.01				-3.01	4.18	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.19	-2.95				-2.95	4.24	23.00
802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	6.85	0.87	1.06			3.98	10.83	23.00
802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	6.85	-2.15	-1.73			0.92	7.77	23.00
802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	6.85	-1.80	-1.63			1.00	7.85	23.00
802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	6.85	-4.22	-4.64			-1.46	5.39	23.00
802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	6.85	-4.26	-4.64			-1.45	5.40	23.00
802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	6.85	-4.58	-4.51			-1.55	5.30	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	12.74	0.24	0.60	0.96	0.99	6.65	19.39	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	12.74	-2.47	-2.04	-1.41	-2.21	3.79	16.53	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	12.74	-2.02	-2.23	-1.29	-2.50	3.72	16.46	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	12.74	-4.82	-5.50	-3.90	-4.86	1.21	13.95	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	12.74	-5.18	-5.22	-3.95	-4.99	1.15	13.89	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	12.74	-5.16	-5.12	-4.08	-4.71	1.18	13.92	23.00
802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	6.72	0.32	0.40	0.48	0.64	6.43	13.15	23.00
802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU 6_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	6.72	-2.00	-2.09	-1.08	-1.66	4.14	10.86	23.00
802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU 4_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	6.72	-1.71	-1.89	-0.78	-1.73	4.28	11.00	23.00
802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	6.72	-4.78	-5.09	-3.66	-4.53	1.46	8.18	23.00
802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	6.72	-4.93	-5.42	-3.78	-4.32	1.40	8.12	23.00
802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	6.72	-4.79	-5.29	-3.74	-4.56	1.42	8.14	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX

PSD

5985MHz

08/12/2025

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

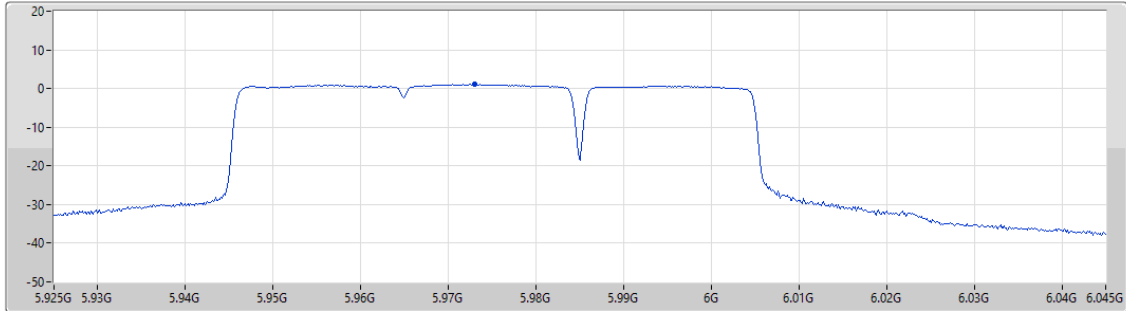


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX

PSD

6025MHz

11/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

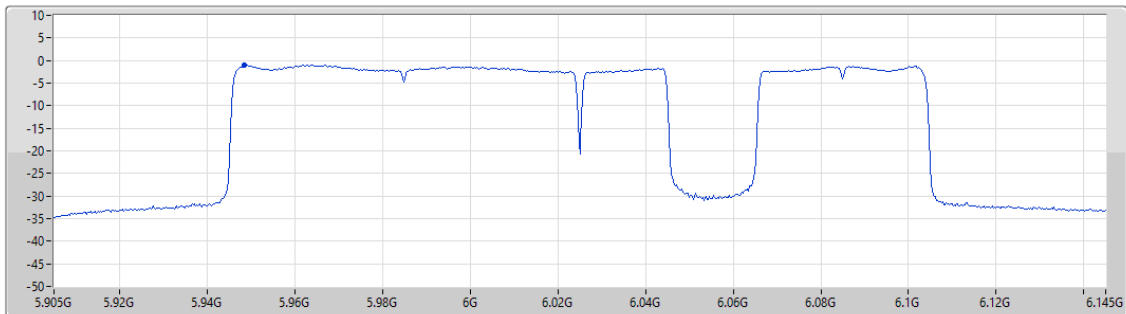


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX

PSD

6025MHz

11/11/2025

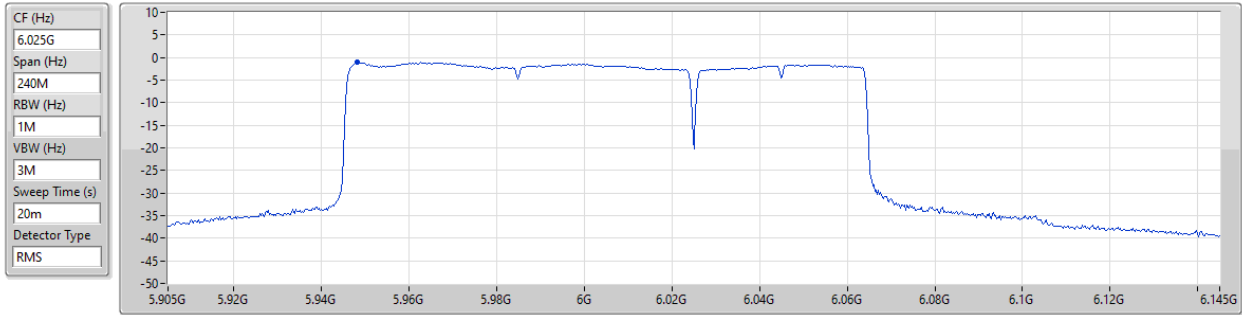


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.09	-1.09	-1.09

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX

PSD

6105MHz

11/11/2025

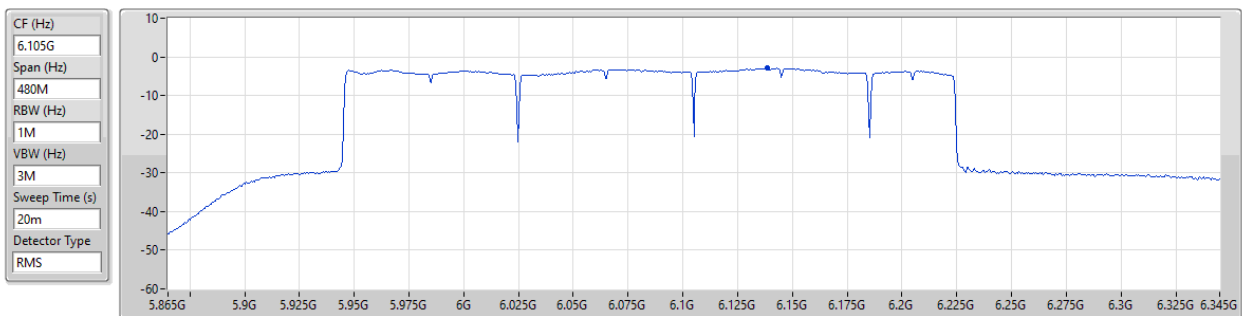


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.96	-2.96	-2.96

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX

PSD

6105MHz

11/11/2025

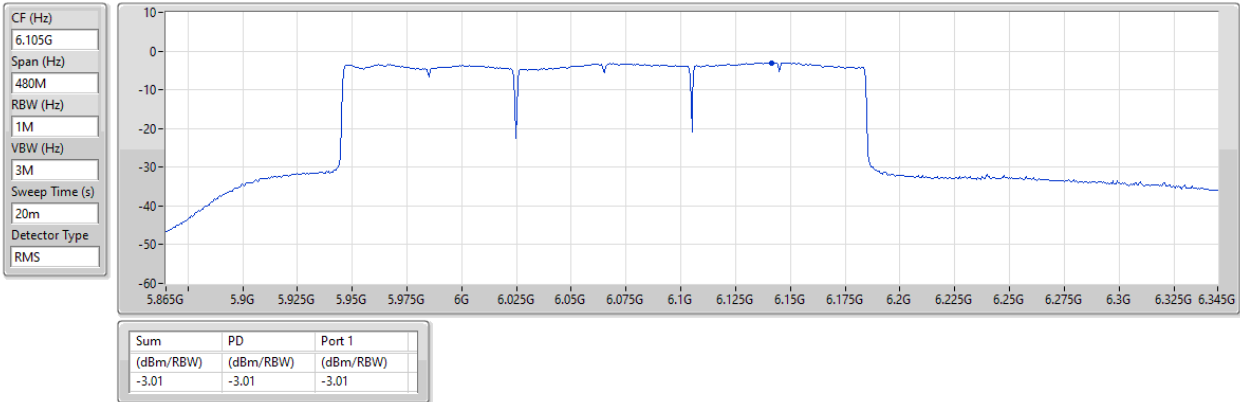


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX

PSD

6105MHz

11/11/2025

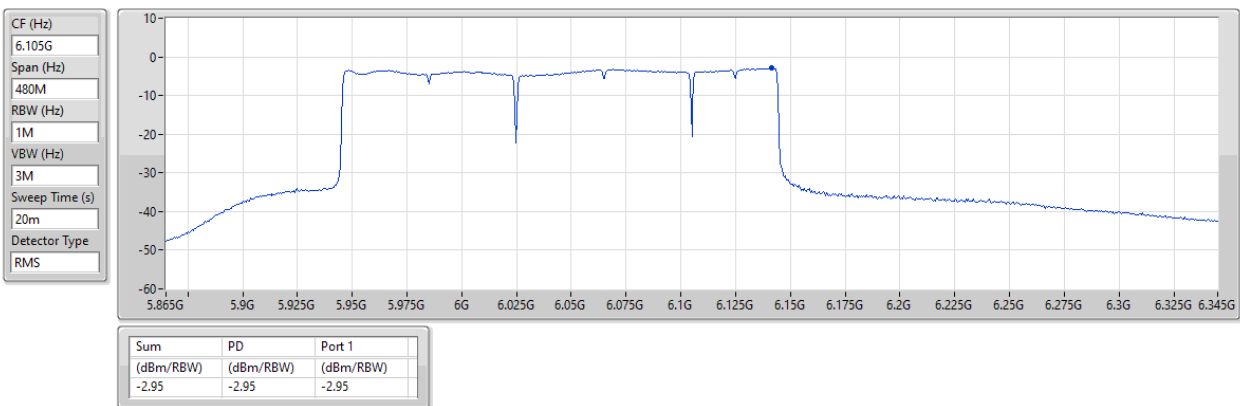


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX

PSD

5985MHz

08/12/2025

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

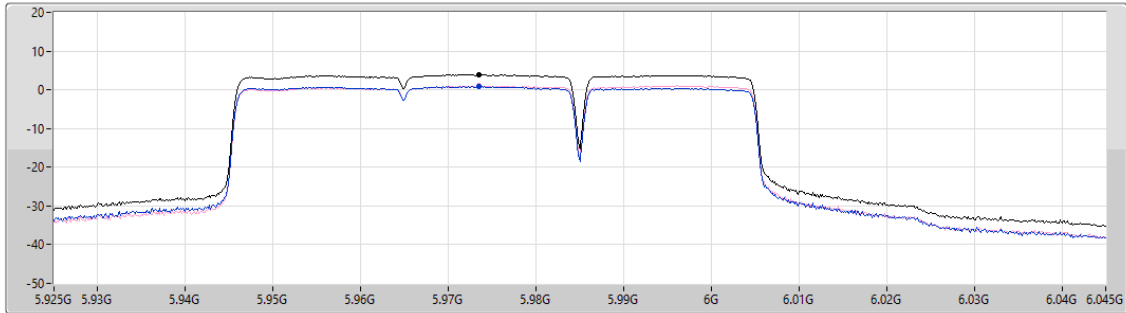

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.98	3.98	0.87	1.06

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX

PSD

6025MHz

11/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

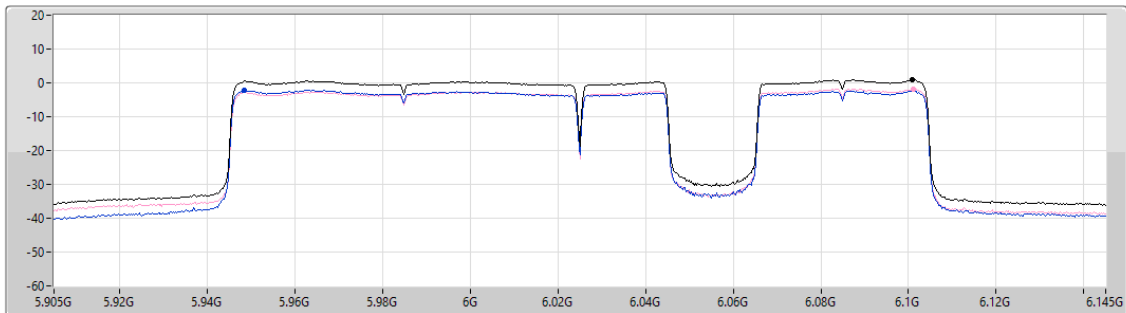

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.92	0.92	-2.15	-1.73

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX

PSD

6025MHz

11/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

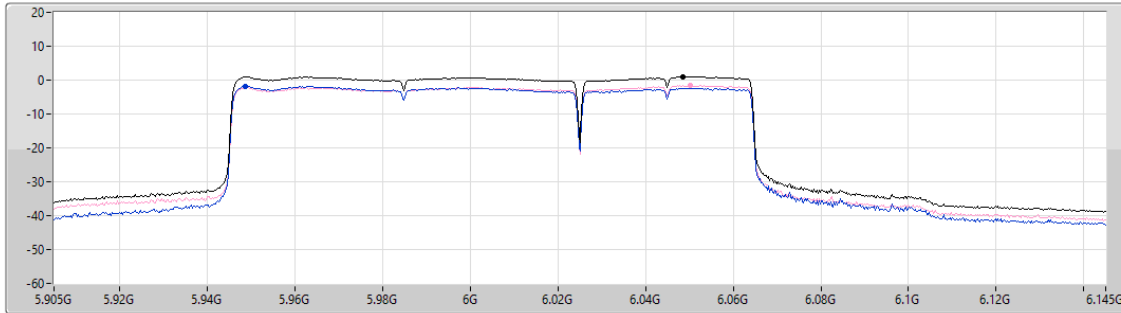

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.00	1.00	-1.80	-1.63

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX

PSD

6105MHz

11/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

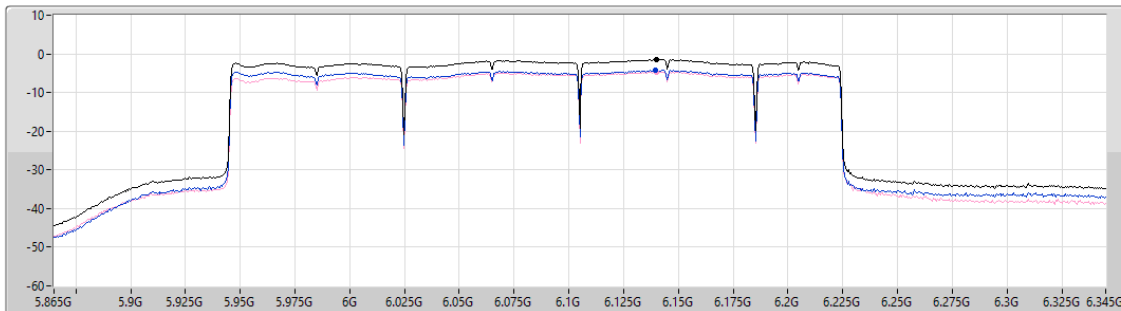

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.46	-1.46	-4.22	-4.64

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX

PSD

6105MHz

11/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

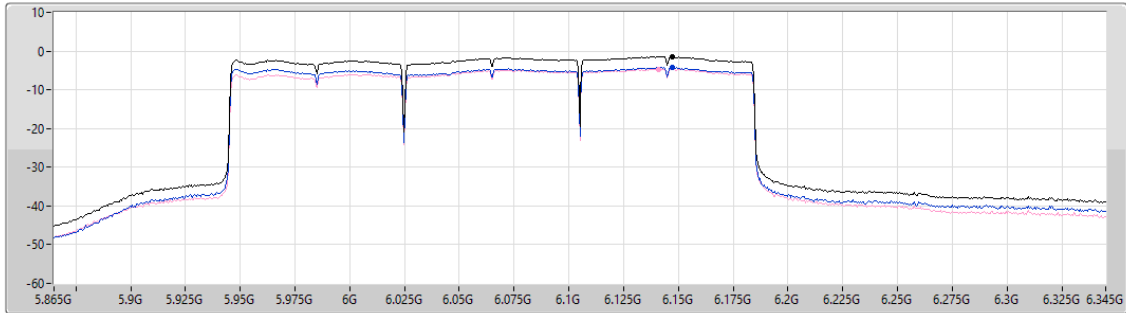

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-1.45	-1.45	-4.26	-4.64

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX

PSD

6105MHz

11/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

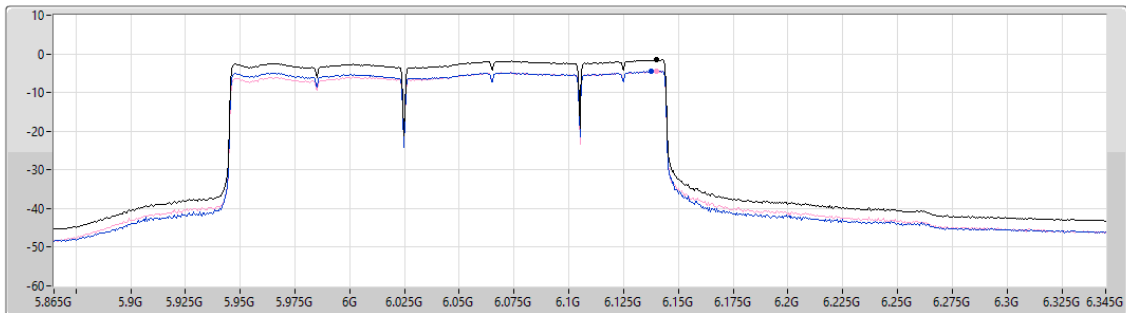

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-1.55	-1.55	-4.58	-4.51

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX

PSD

5985MHz

09/12/2025

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

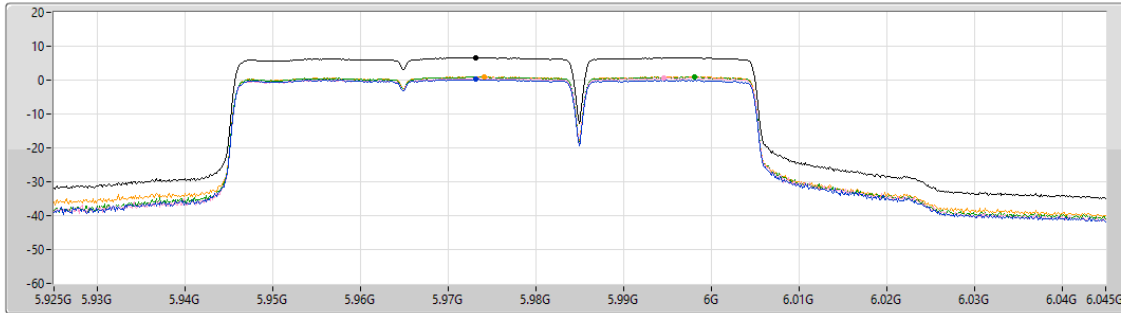

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.65	6.65	0.24	0.60	0.96	0.99

Sum
Port 1
Port 2
Port 3
Port 4


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

PSD

6025MHz

12/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

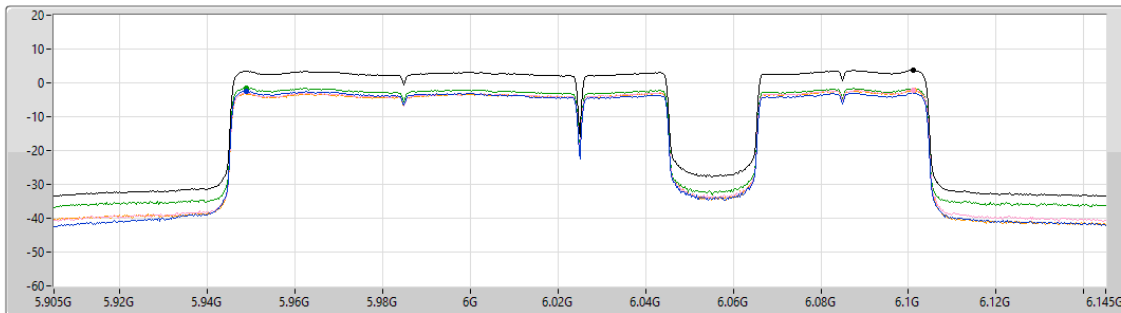

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.79	3.79	-2.47	-2.04	-1.41	-2.21

Sum
Port 1
Port 2
Port 3
Port 4


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU_4_4TX

PSD

6025MHz

12/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

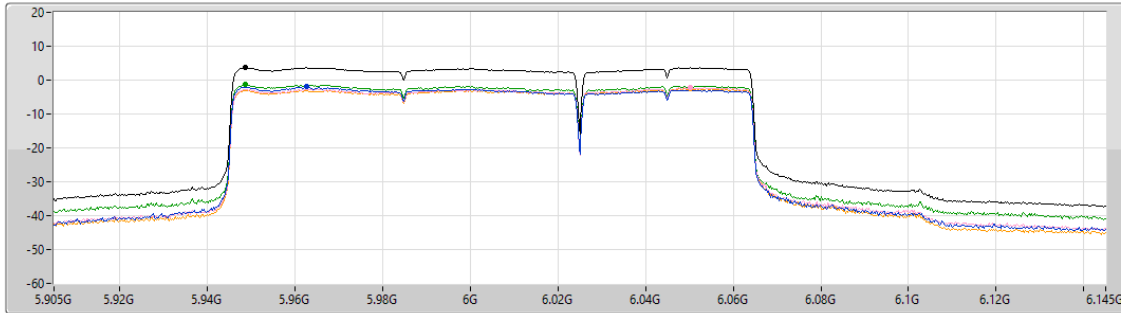

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.72	3.72	-2.02	-2.23	-1.29	-2.50

Sum
Port 1
Port 2
Port 3
Port 4


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU_8_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

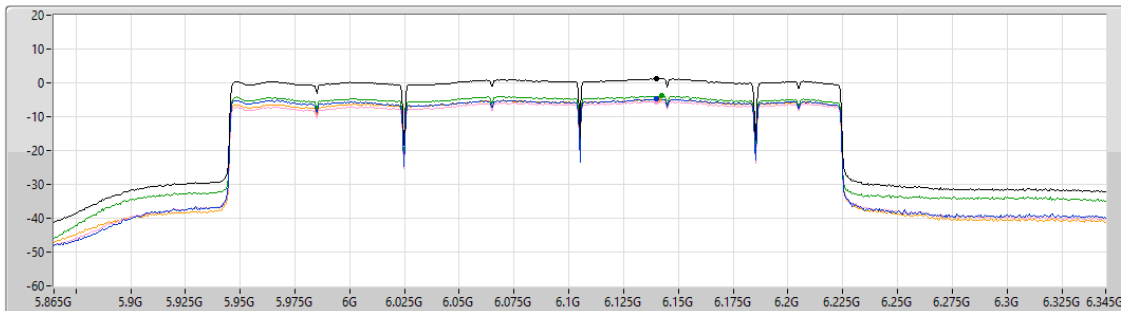

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.21	1.21	-4.82	-5.50	-3.90	-4.86

Sum
Port 1
Port 2
Port 3
Port 4


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

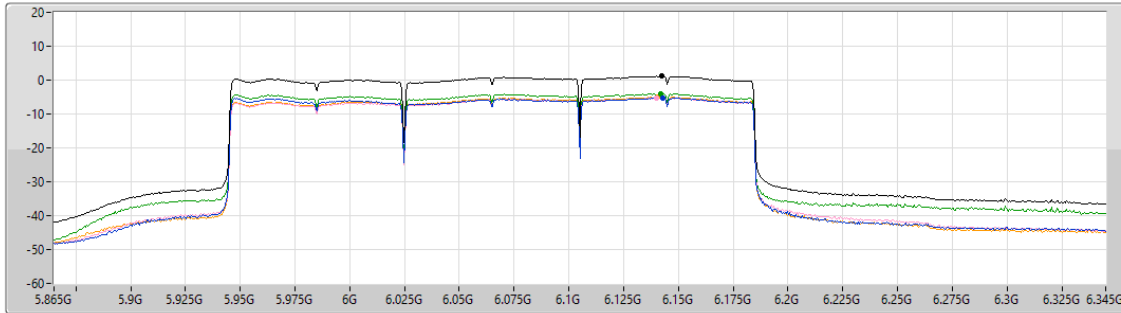

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
1.15	1.15	-5.18	-5.22	-3.95	-4.99


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

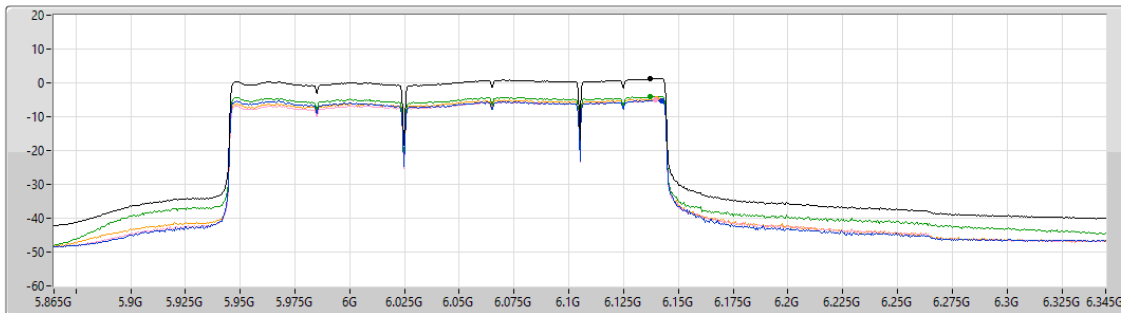

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
1.18	1.18	-5.16	-5.12	-4.08	-4.71

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX

PSD

5985MHz

08/12/2025

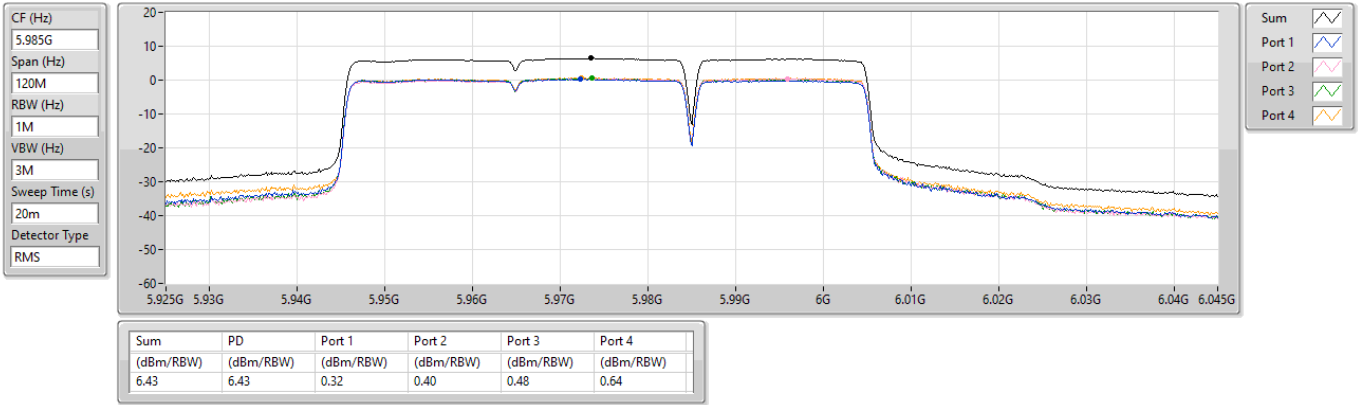


5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU 6_4TX

PSD

6025MHz

12/11/2025

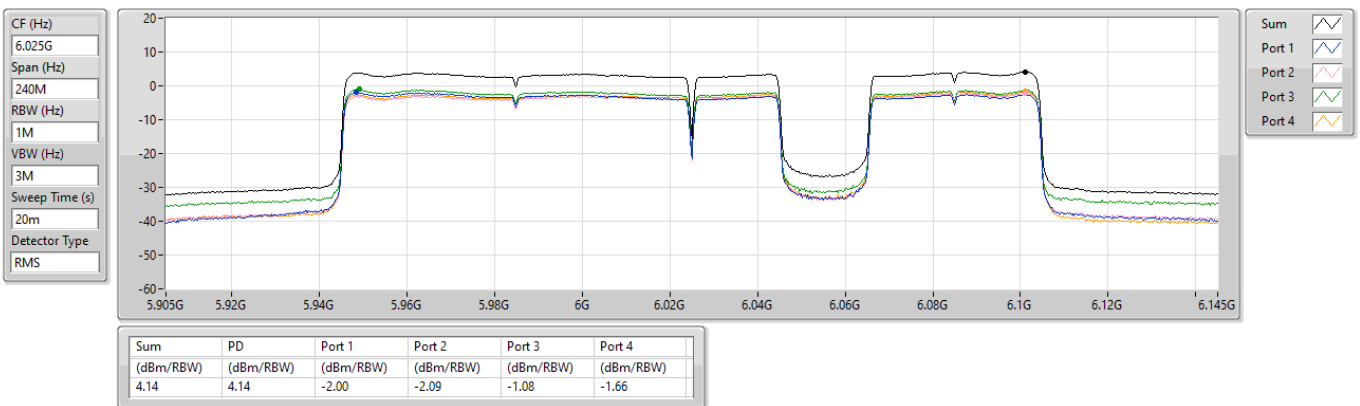


5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU_4_4TX

PSD

6025MHz

12/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

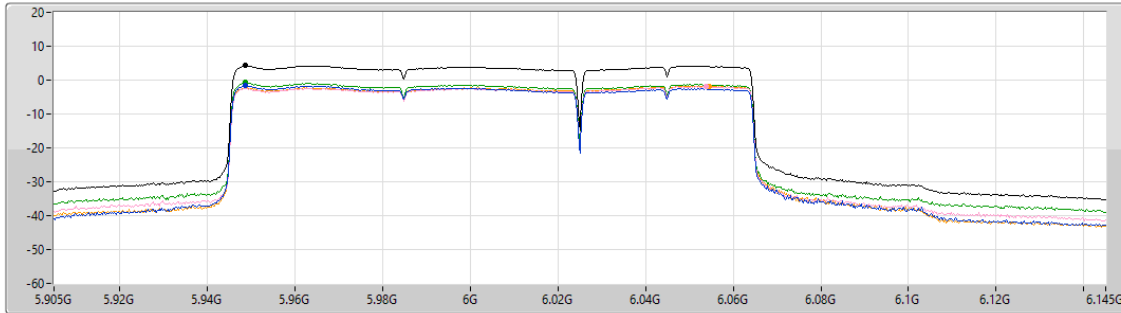

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
4.28	4.28	-1.71	-1.89	-0.78	-1.73

Sum
Port 1
Port 2
Port 3
Port 4


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU_8_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

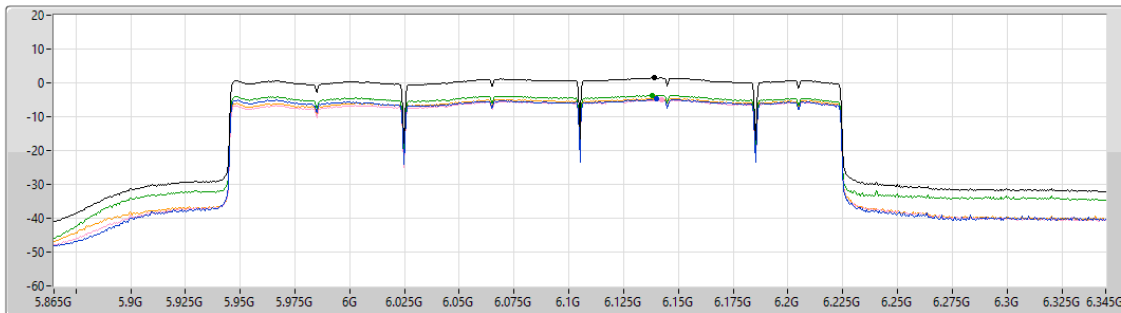

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
1.46	1.46	-4.78	-5.09	-3.66	-4.53

Sum
Port 1
Port 2
Port 3
Port 4


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

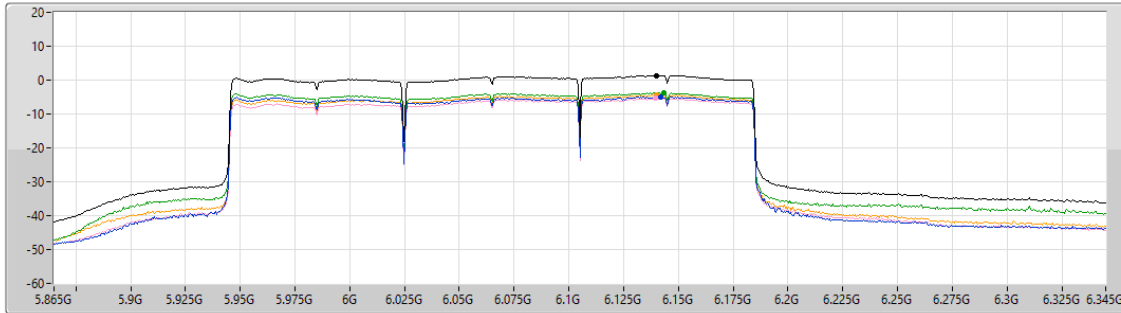

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.40	1.40	-4.93	-5.42	-3.78	-4.32

Sum
Port 1
Port 2
Port 3
Port 4


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

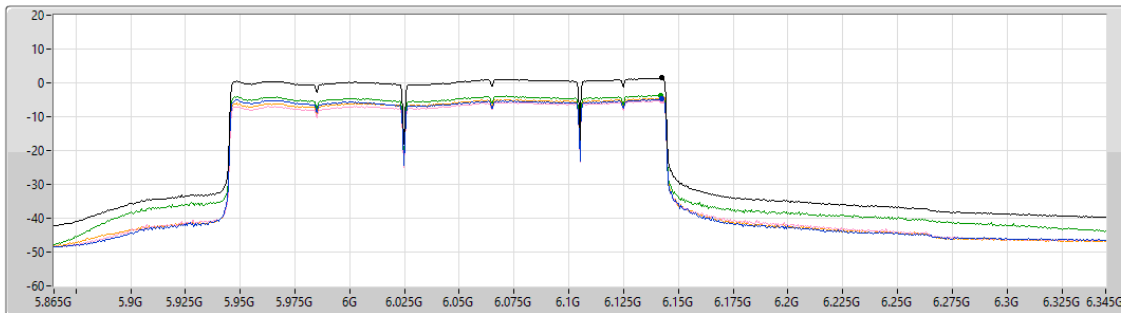

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.42	1.42	-4.79	-5.29	-3.74	-4.56

Sum
Port 1
Port 2
Port 3
Port 4

Test Mode: Mode 2

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX	3.72	5.69
802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX	5.83	7.56
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	7.40	14.94
802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX	8.27	9.80
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX	0.08	2.05
802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX	2.04	3.77
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX	3.81	11.35
802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU 6_4TX	4.63	6.16
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX	-2.44	-0.47
802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX	-0.52	1.21
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	1.45	8.99
802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX	1.72	3.25

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	1.97	3.72				3.72	5.69	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	1.97	0.08				0.08	2.05	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	1.97	0.03				0.03	2.00	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	1.97	-2.48				-2.48	-0.51	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	1.97	-2.53				-2.53	-0.56	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	1.97	-2.44				-2.44	-0.47	23.00
802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	1.73	3.10	2.57			5.83	7.56	23.00
802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	1.73	-1.01	-0.68			2.04	3.77	23.00
802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	1.73	-0.78	-0.83			1.95	3.68	23.00
802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	1.73	-3.38	-3.69			-0.57	1.16	23.00
802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	1.73	-3.33	-3.68			-0.52	1.21	23.00
802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	1.73	-3.59	-3.65			-0.64	1.09	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.54	1.66	1.36	1.20	1.57	7.40	14.94	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.54	-2.25	-2.08	-1.43	-2.08	3.81	11.35	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.54	-2.11	-2.31	-1.39	-2.28	3.77	11.31	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.54	-4.68	-4.84	-3.79	-4.73	1.45	8.99	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.54	-4.91	-4.85	-3.97	-4.65	1.41	8.95	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.54	-4.74	-4.87	-3.93	-4.58	1.42	8.96	23.00
802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	1.53	2.37	2.08	2.70	1.98	8.27	9.80	23.00
802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU 6_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	1.53	-1.67	-1.13	-0.72	-1.55	4.63	6.16	23.00
802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU 4_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	1.53	-1.55	-1.54	-0.63	-1.64	4.45	5.98	23.00
802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	1.53	-4.66	-4.69	-3.57	-4.54	1.61	3.14	23.00
802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	1.53	-4.54	-4.60	-3.74	-4.28	1.72	3.25	23.00
802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	1.53	-4.58	-4.80	-3.53	-4.27	1.69	3.22	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX

PSD

5985MHz

12/11/2025

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

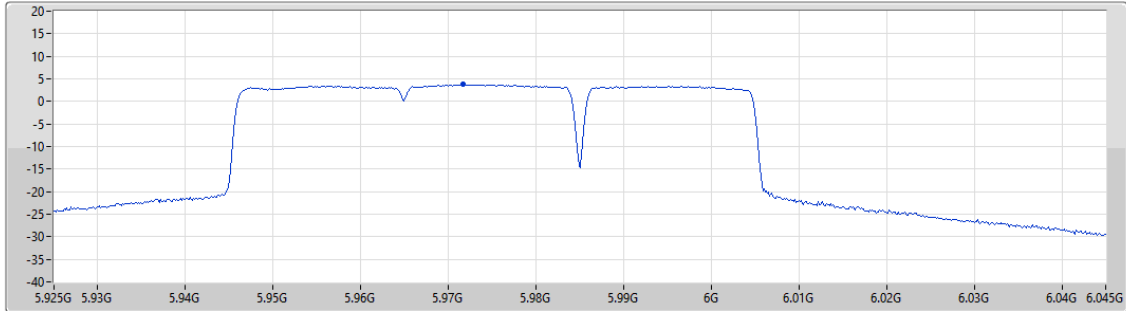

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.72	3.72	3.72


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX

PSD

6025MHz

12/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

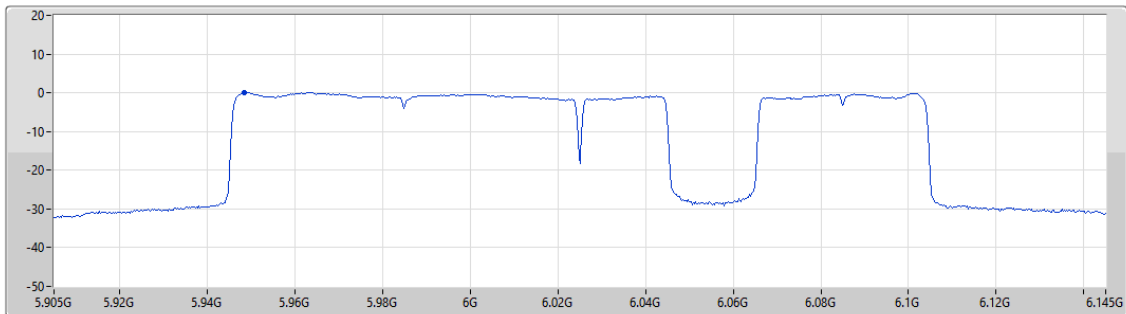

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.08	0.08	0.08


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX

PSD

6025MHz

12/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

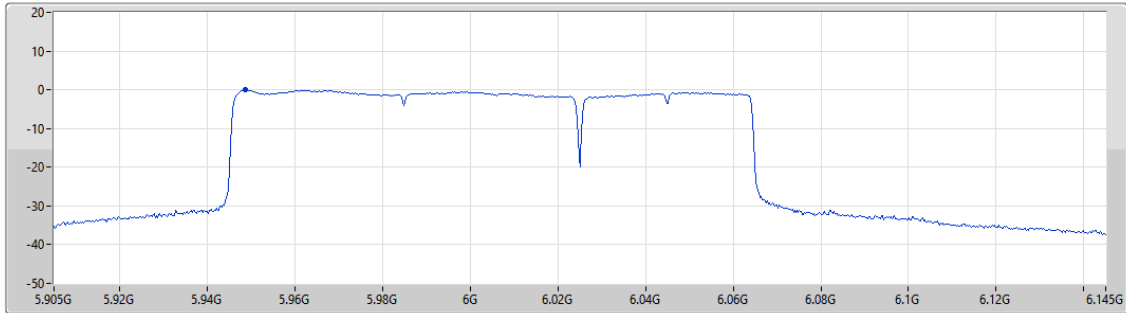

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.03	0.03	0.03


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

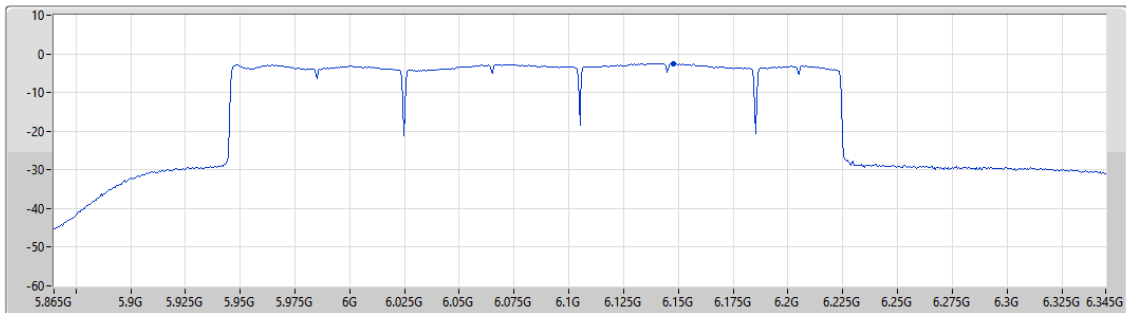


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.48	-2.48	-2.48

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX

PSD

6105MHz

12/11/2025

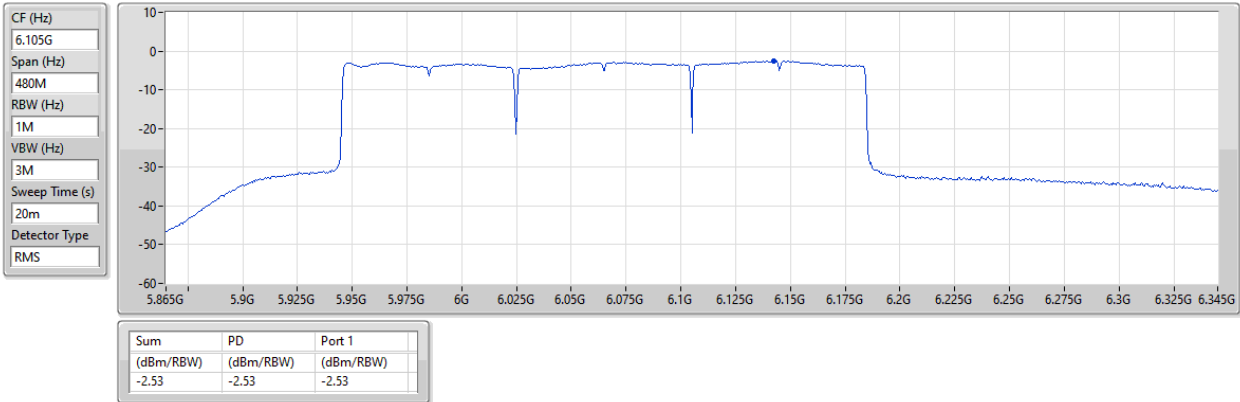


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX

PSD

6105MHz

12/11/2025

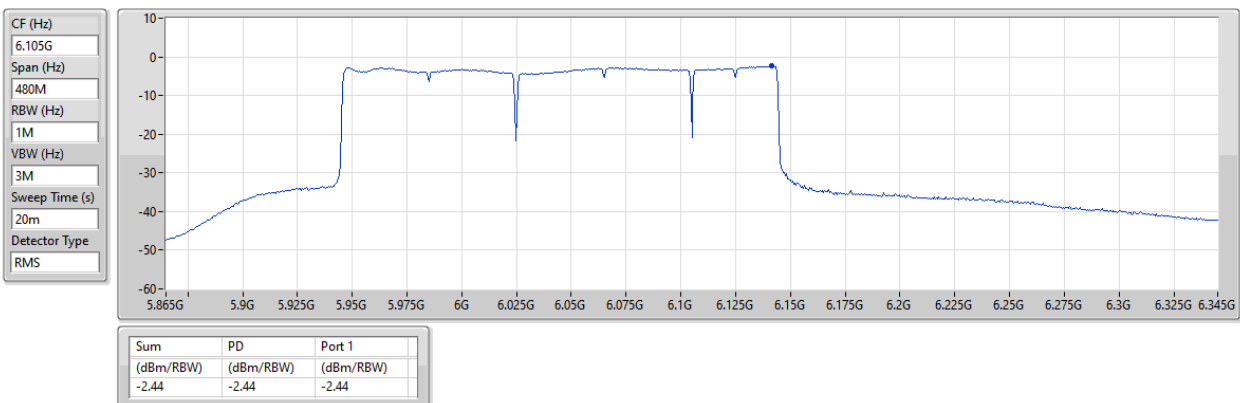


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX

PSD

5985MHz

12/11/2025

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

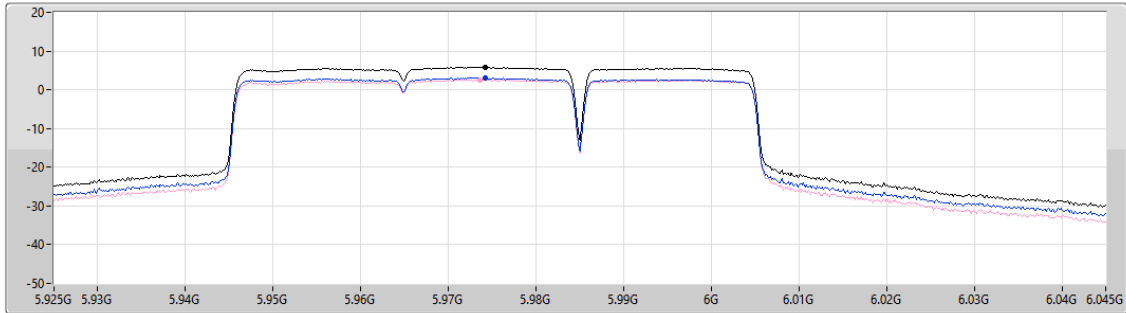

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.83	5.83	3.10	2.57

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX

PSD

6025MHz

12/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

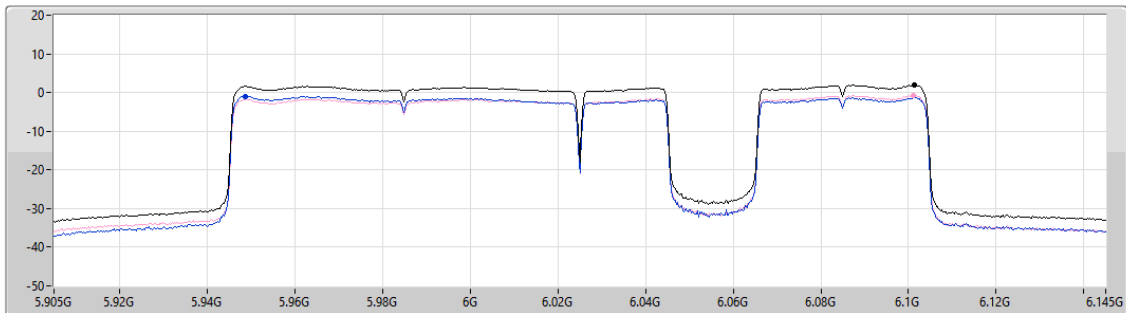

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.04	2.04	-1.01	-0.68

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX

PSD

6025MHz

12/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

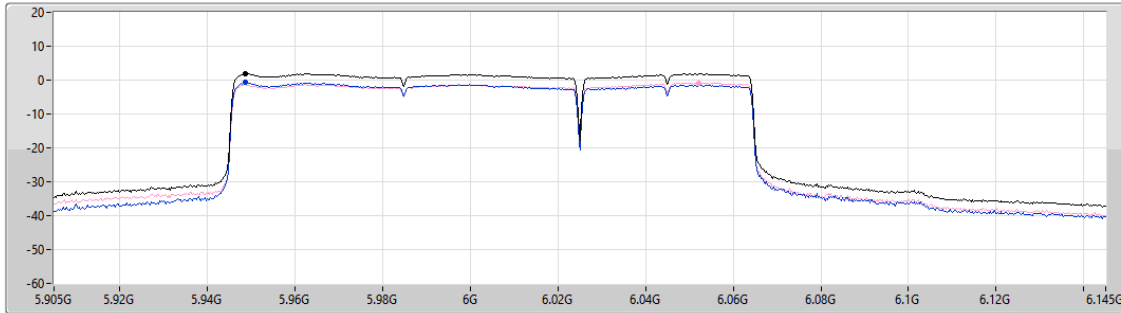

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
1.95	1.95	-0.78	-0.83

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

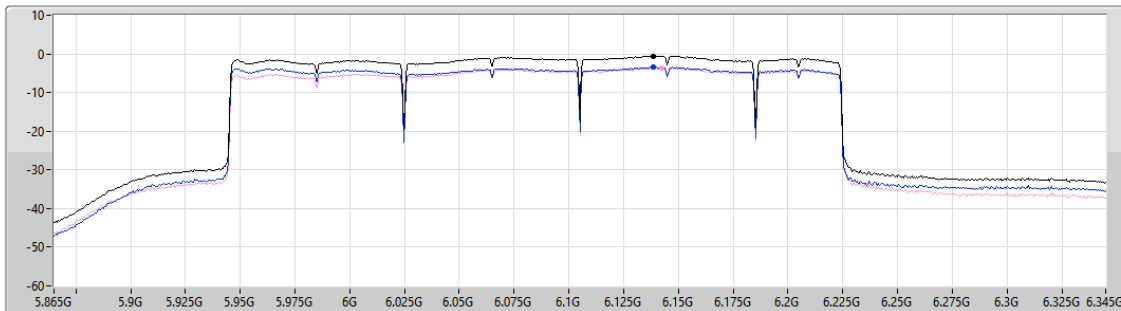

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-0.57	-0.57	-3.38	-3.69

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

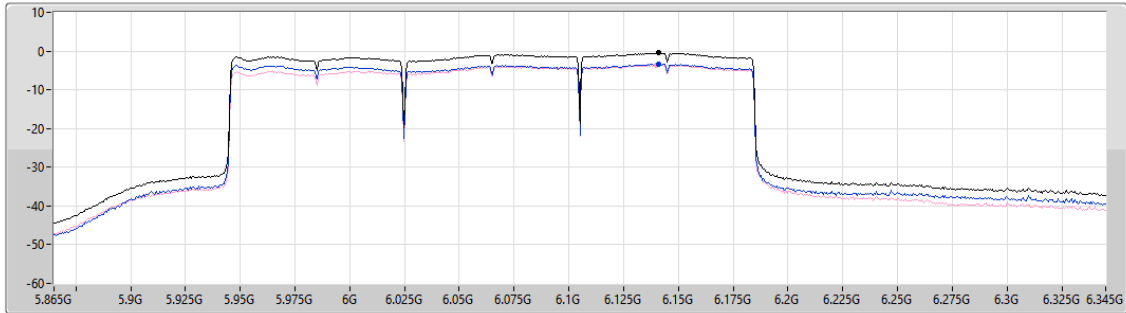

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.52	-0.52	-3.33	-3.68

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

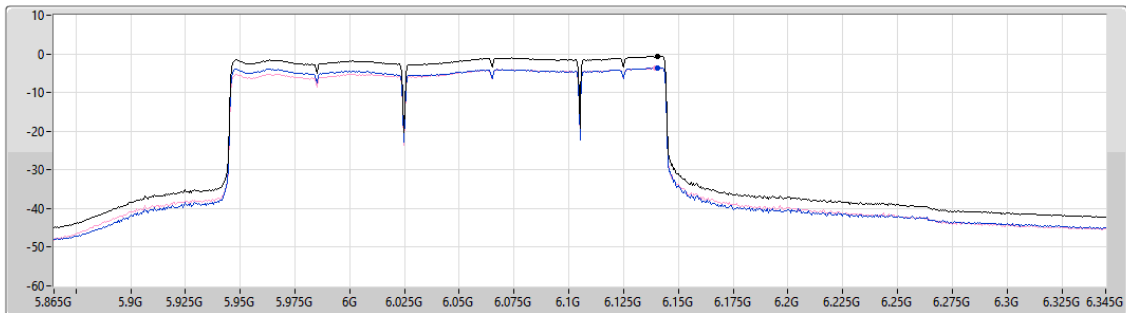

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.64	-0.64	-3.59	-3.65


Sum
Port 1
Port 2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX

PSD

5985MHz

08/12/2025

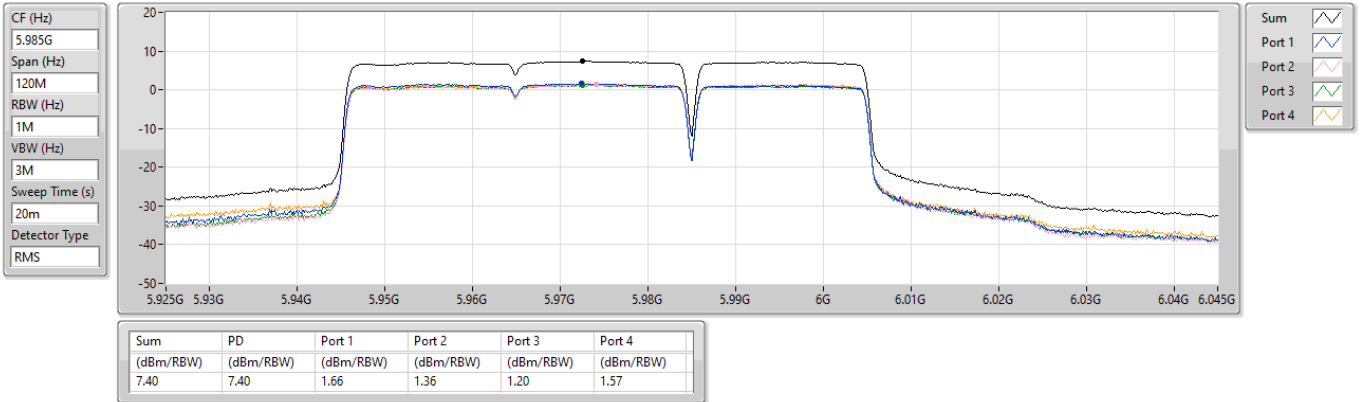


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

PSD

6025MHz

12/11/2025

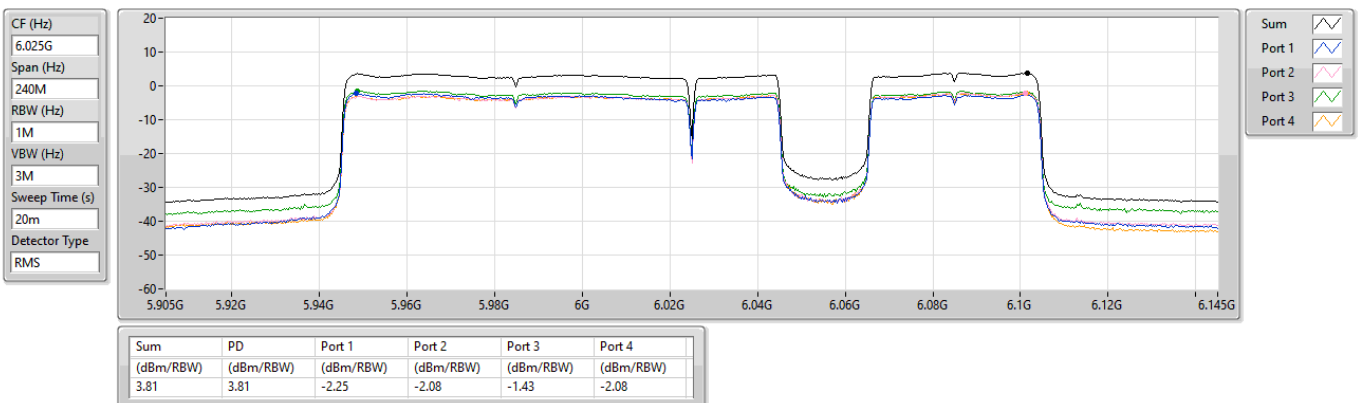


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU_4_4TX

PSD

6025MHz

12/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

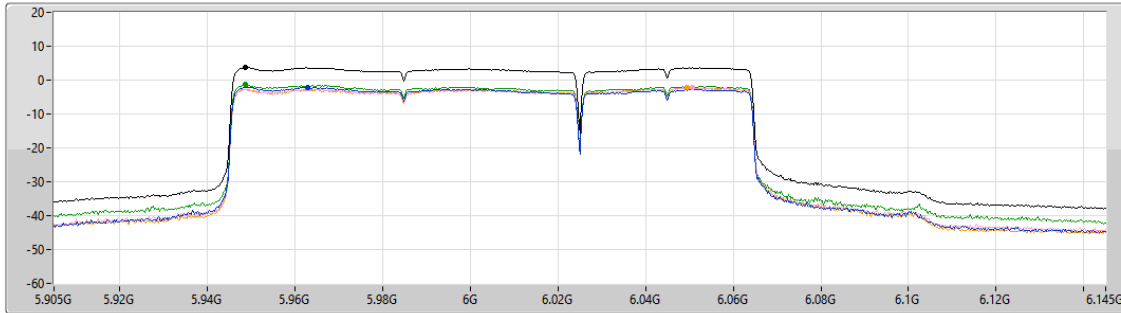

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
3.77	3.77	-2.11	-2.31	-1.39	-2.28


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU_8_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

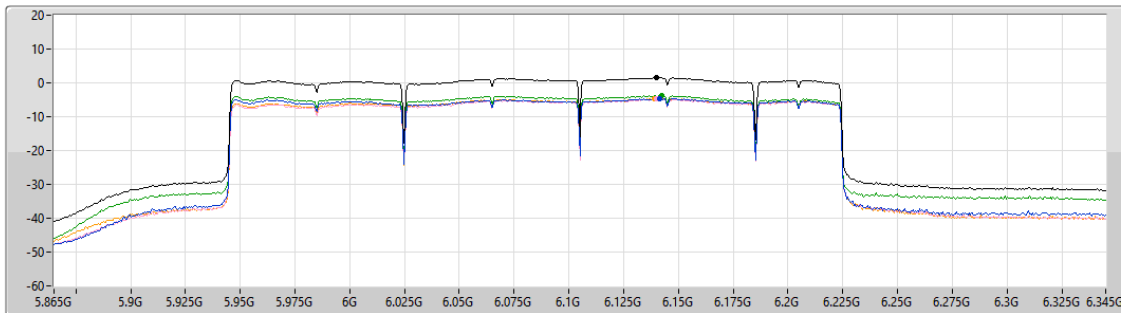

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
1.45	1.45	-4.68	-4.84	-3.79	-4.73

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

PSD

6105MHz

12/11/2025

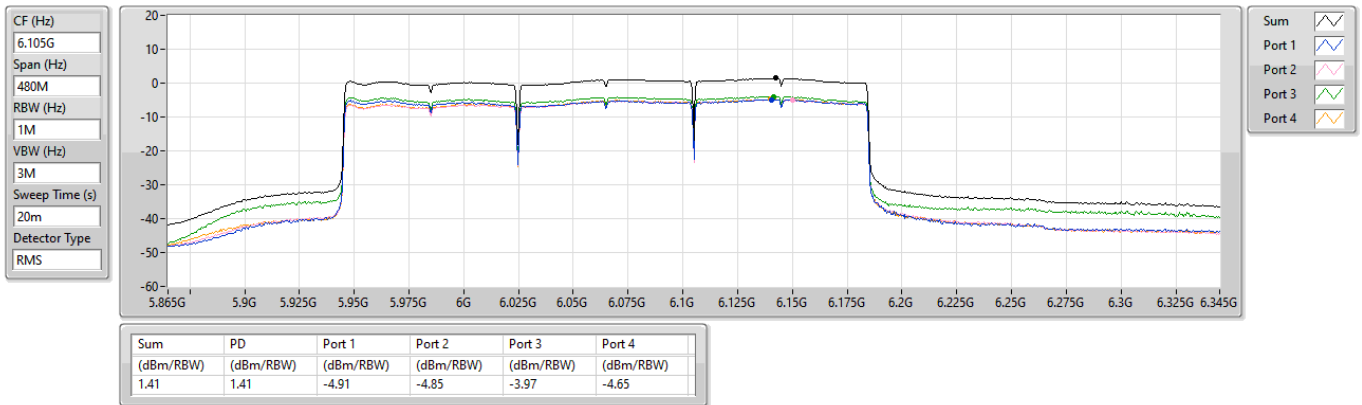


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX

PSD

6105MHz

12/11/2025

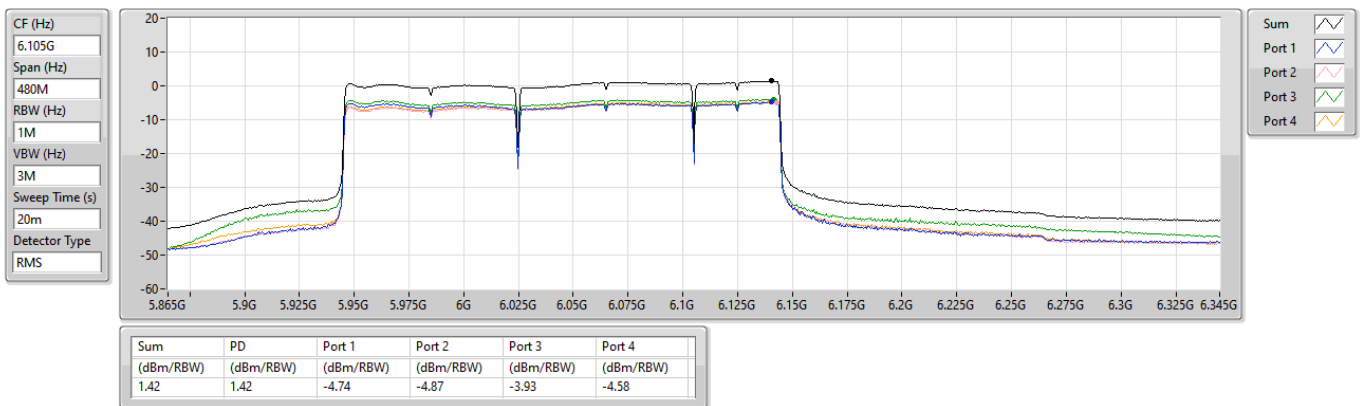


5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX

PSD

5985MHz

12/11/2025

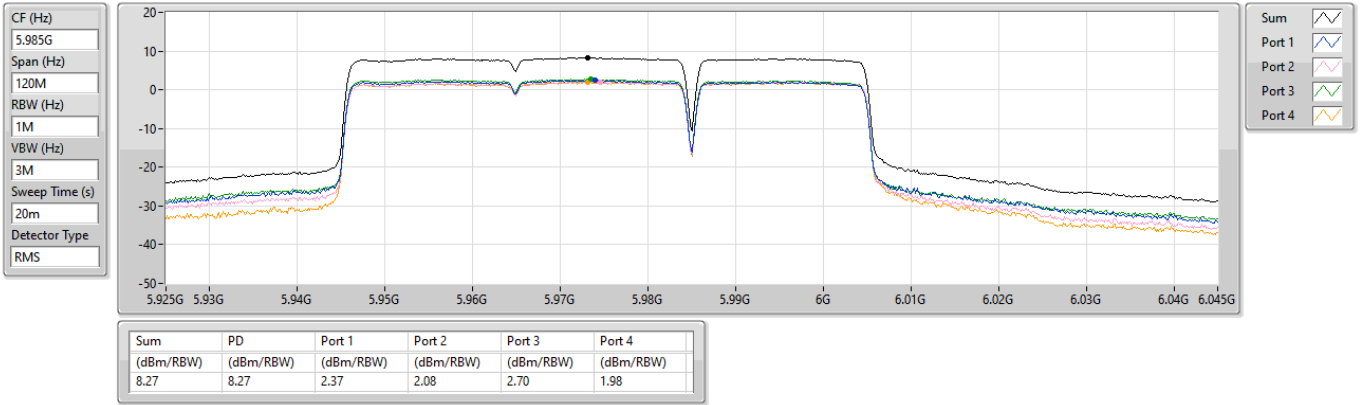


5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU 6_4TX

PSD

6025MHz

12/11/2025

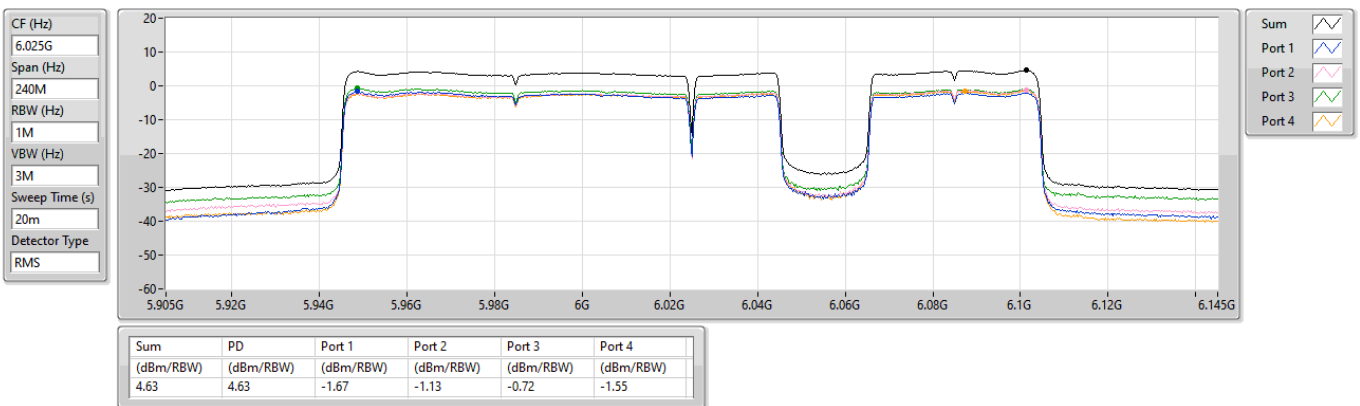


5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU_4_4TX

PSD

6025MHz

12/11/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

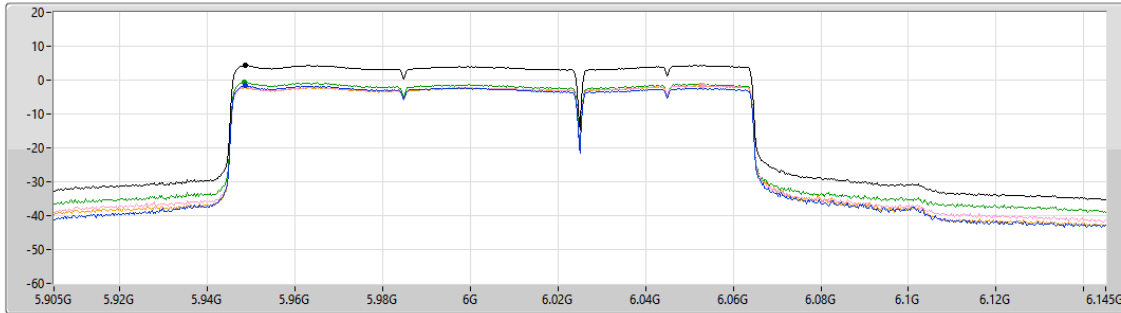

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
4.45	4.45	-1.55	-1.54	-0.63	-1.64


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU_8_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

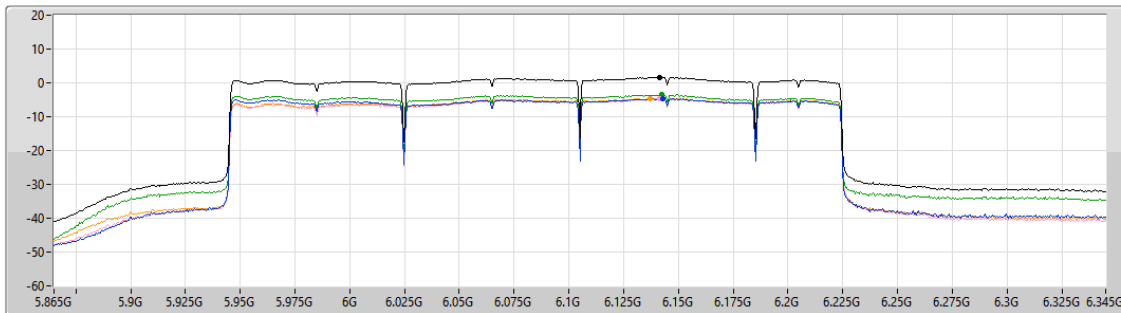

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
1.61	1.61	-4.66	-4.69	-3.57	-4.54


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

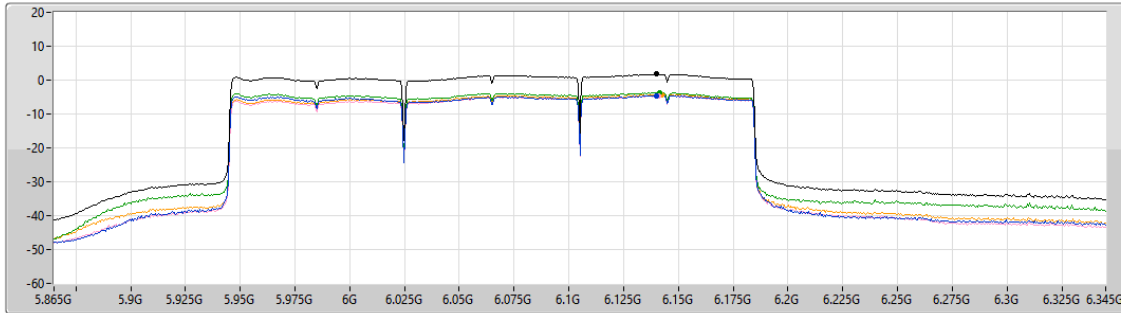

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.72	1.72	-4.54	-4.60	-3.74	-4.28


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX

PSD

6105MHz

12/11/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

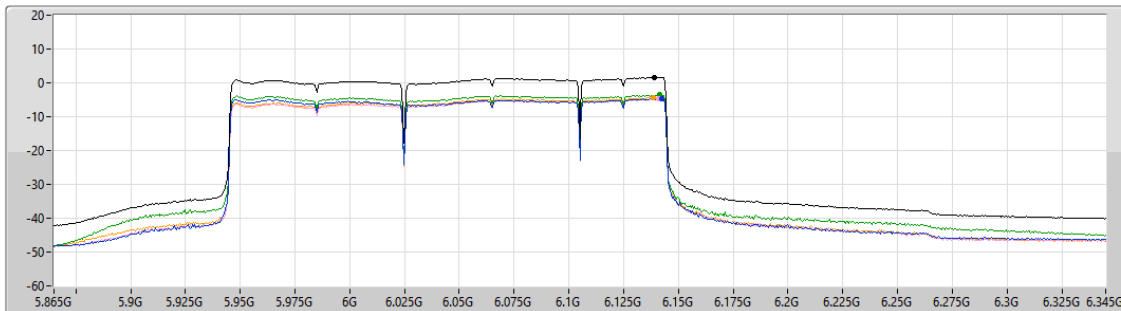

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.69	1.69	-4.58	-4.80	-3.53	-4.27




Test Mode: Mode 1

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX	Pass	RMS	5.925G	68.13	68.20	-0.07	3	Vertical	356	1.88	-

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX

5985MHz_TX

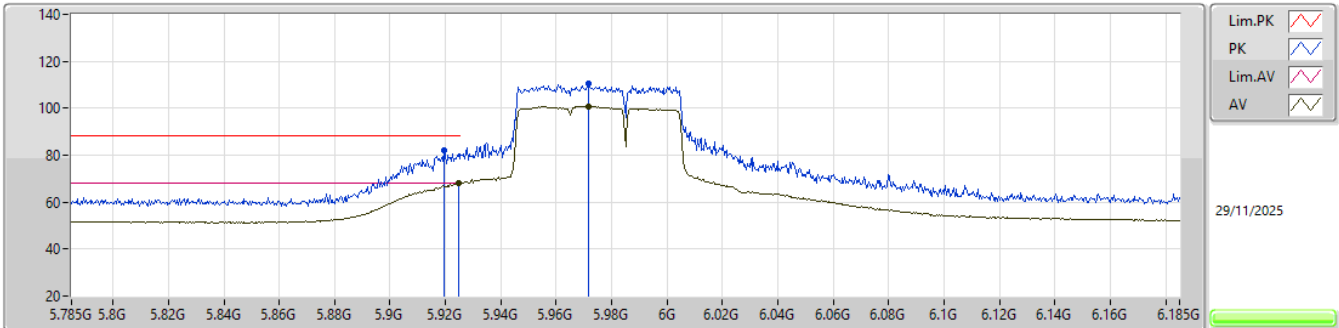


EUT Y_1TX
Setting 78
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9194G	81.97	88.20	-6.23	69.83	3	Vertical	358	1.73	-	34.14	8.16	30.16			
RMS	5.9246G	67.87	68.20	-0.33	55.73	3	Vertical	358	1.73	-	34.15	8.15	30.16			
PK	5.9718G	110.39	Inf	-Inf	98.16	3	Vertical	358	1.73	-	34.24	8.13	30.14			
RMS	5.9718G	100.94	Inf	-Inf	88.71	3	Vertical	358	1.73	-	34.24	8.13	30.14			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX


5985MHz_TX

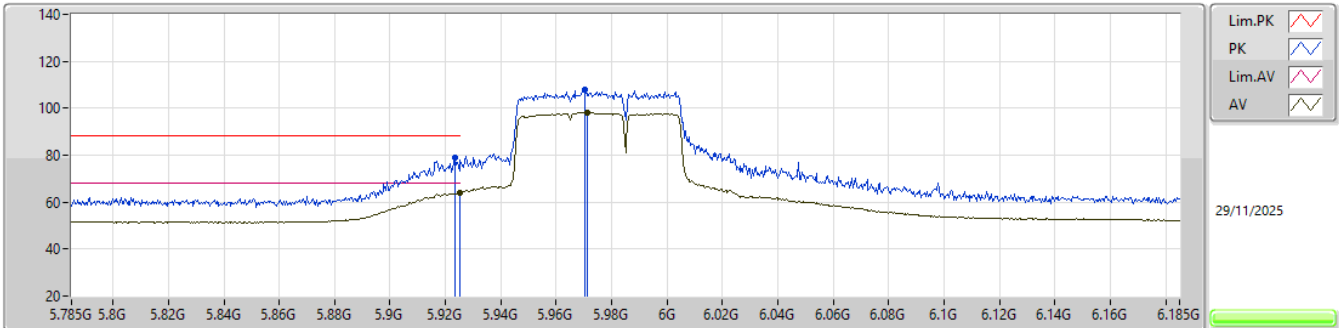EUT_Y_1TX
Setting 78
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9234G	78.79	88.20	-9.41	66.65	3	Horizontal	0	1.76	-	34.15	8.15	30.16
RMS	5.925G	63.90	68.20	-4.30	51.76	3	Horizontal	0	1.76	-	34.15	8.15	30.16
PK	5.9702G	107.91	Inf	-Inf	95.68	3	Horizontal	0	1.76	-	34.24	8.13	30.14
RMS	5.9714G	98.19	Inf	-Inf	85.96	3	Horizontal	0	1.76	-	34.24	8.13	30.14

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+242 MRU 6_1TX

6025MHz_TX

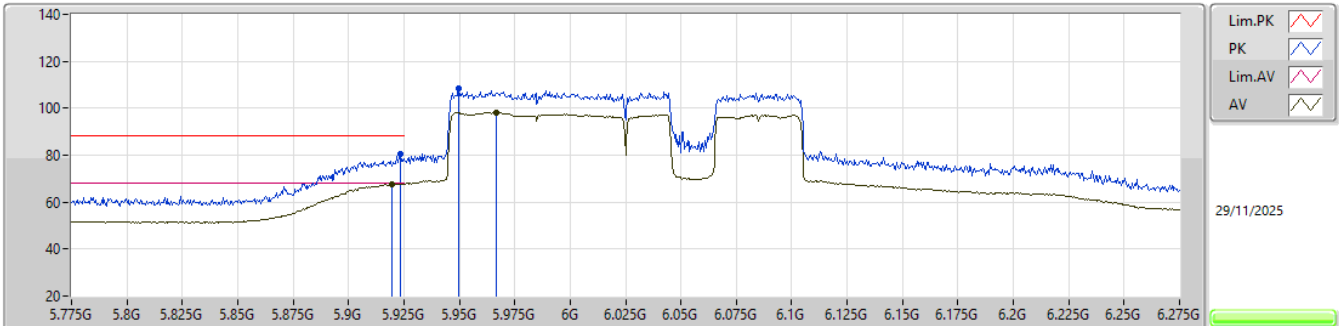


EUT_Y_1TX
Setting 83
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9235G	80.44	88.20	-7.76	68.30	3	Vertical	360	1.80	-	34.15	8.15	30.16			
RMS	5.9195G	67.66	68.20	-0.54	55.52	3	Vertical	360	1.80	-	34.14	8.16	30.16			
PK	5.9495G	108.60	Inf	-Inf	96.41	3	Vertical	360	1.80	-	34.20	8.14	30.15			
RMS	5.9665G	98.22	Inf	-Inf	85.99	3	Vertical	360	1.80	-	34.23	8.14	30.14			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+242 MRU 6_1TX

6025MHz_TX

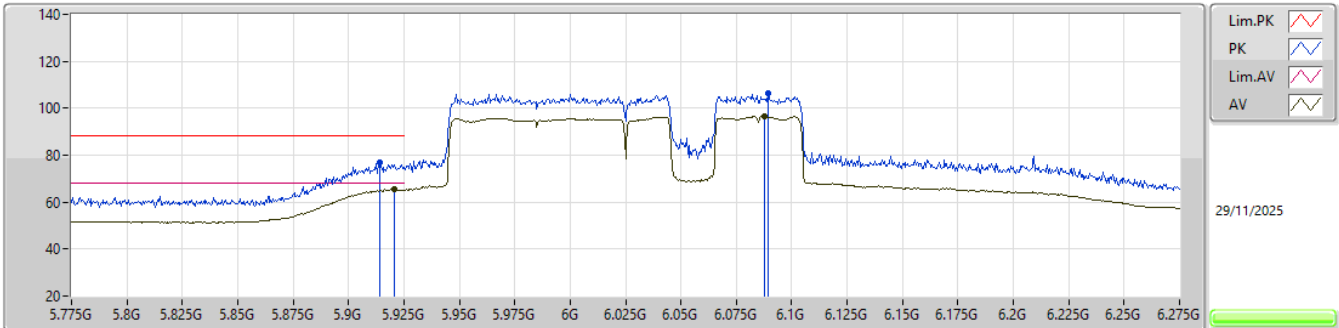


EUT_Y_1TX
Setting 83
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.914G	76.70	88.20	-11.50	64.57	3	Horizontal	360	1.39	-	34.13	8.16	30.16			
RMS	5.9205G	65.46	68.20	-2.74	53.32	3	Horizontal	360	1.39	-	34.14	8.16	30.16			
PK	6.0895G	106.21	Inf	-Inf	93.83	3	Horizontal	360	1.39	-	34.48	8.07	30.17			
RMS	6.0875G	96.59	Inf	-Inf	84.20	3	Horizontal	360	1.39	-	34.48	8.07	30.16			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX

6025MHz_TX

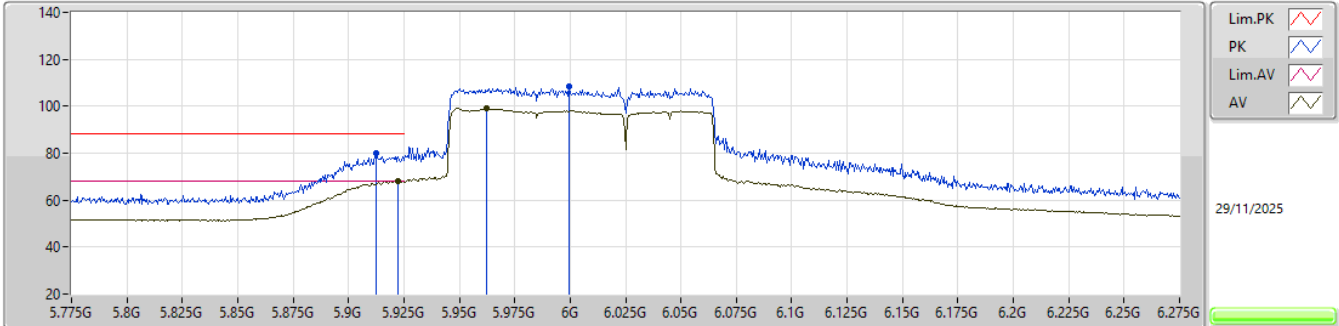


EUT_Y_1TX
Setting 81
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9125G	79.98	88.20	-8.22	67.86	3	Vertical	358	1.78	-	34.12	8.16	30.16			
RMS	5.9225G	68.12	68.20	-0.08	55.98	3	Vertical	358	1.78	-	34.15	8.15	30.16			
PK	5.9995G	108.41	Inf	-Inf	96.12	3	Vertical	358	1.78	-	34.30	8.12	30.13			
RMS	5.9625G	98.96	Inf	-Inf	86.73	3	Vertical	358	1.78	-	34.23	8.14	30.14			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX

6025MHz_TX

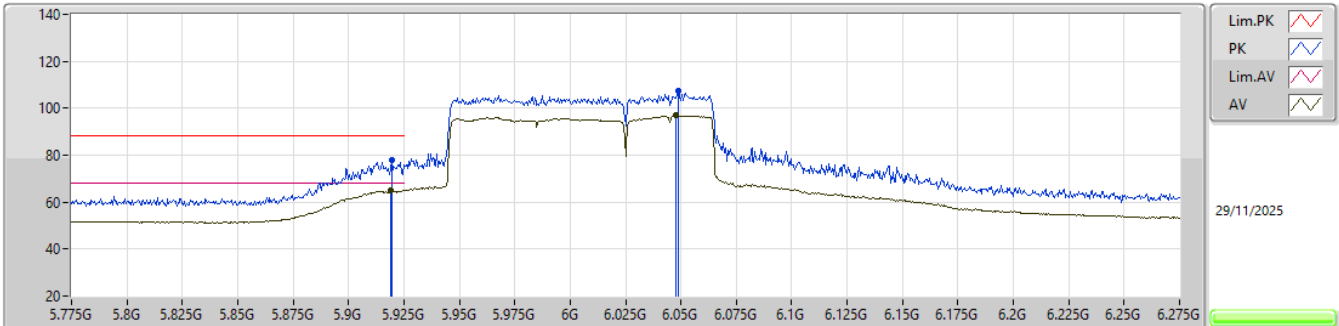


EUT_Y_1TX
Setting 81
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9195G	78.12	88.20	-10.08	65.98	3	Horizontal	360	1.80	-	34.14	8.16	30.16			
RMS	5.919G	65.06	68.20	-3.14	52.92	3	Horizontal	360	1.80	-	34.14	8.16	30.16			
PK	6.049G	107.36	Inf	-Inf	95.02	3	Horizontal	360	1.80	-	34.40	8.09	30.15			
RMS	6.0475G	96.92	Inf	-Inf	84.59	3	Horizontal	360	1.80	-	34.39	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX

6105MHz_TX

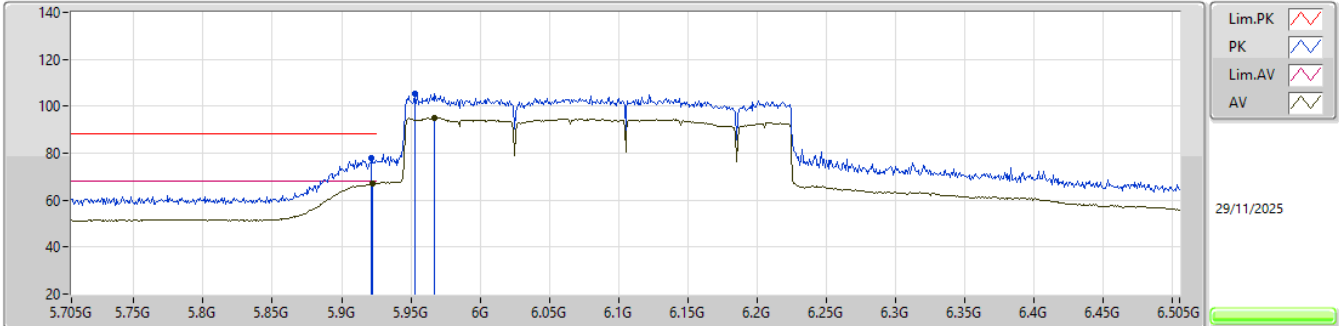


EUT_Y_1TX
Setting 88
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9218G	77.73	88.20	-10.47	65.59	3	Vertical	360	1.73	-	34.14	8.16	30.16				
RMS	5.9226G	67.06	68.20	-1.14	54.92	3	Vertical	360	1.73	-	34.15	8.15	30.16				
PK	5.953G	105.51	Inf	-Inf	93.31	3	Vertical	360	1.73	-	34.21	8.14	30.15				
RMS	5.9674G	95.04	Inf	-Inf	82.82	3	Vertical	360	1.73	-	34.23	8.13	30.14				

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX

6105MHz_TX

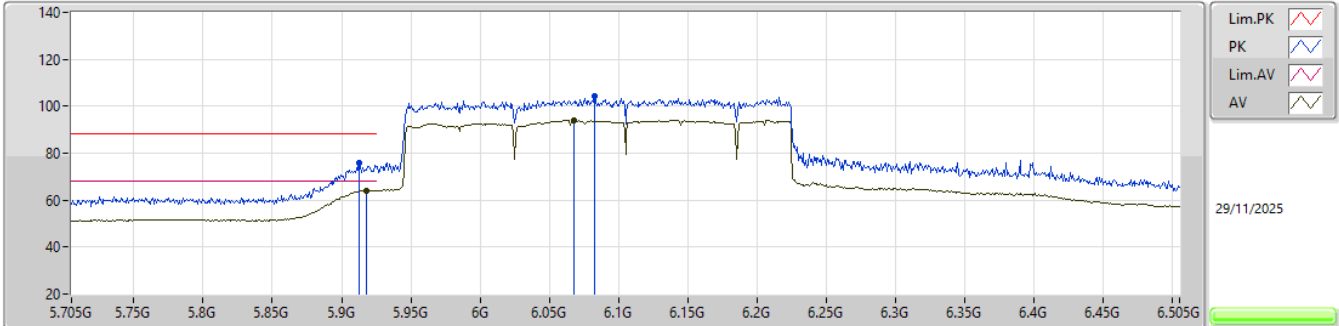


EUT_Y_1TX
Setting 88
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.913G	75.65	88.20	-12.55	63.52	3	Horizontal	0	1.42	-	34.13	8.16	30.16
RMS	5.9178G	64.22	68.20	-3.98	52.08	3	Horizontal	0	1.42	-	34.14	8.16	30.16
PK	6.0826G	104.07	Inf	-Inf	91.69	3	Horizontal	0	1.42	-	34.47	8.07	30.16
RMS	6.0674G	94.02	Inf	-Inf	81.67	3	Horizontal	0	1.42	-	34.43	8.08	30.16

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX

6105MHz_TX

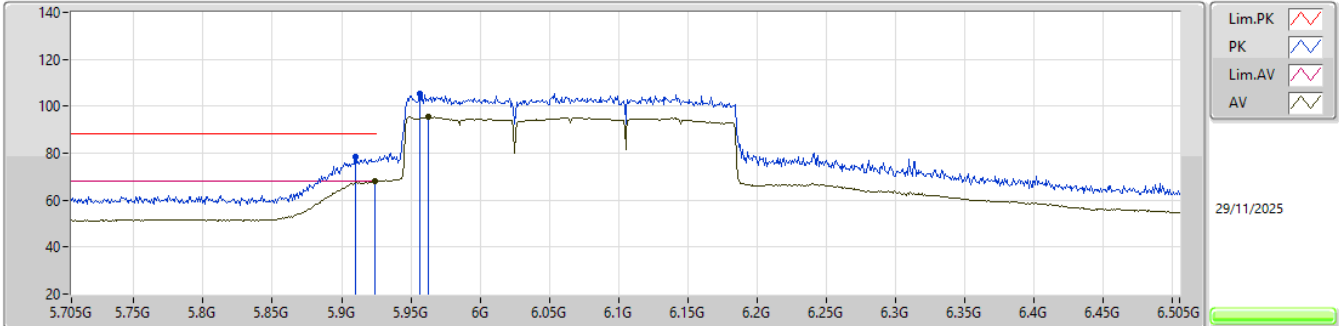


EUT_Y_1TX
Setting 87
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9098G	78.24	88.20	-9.96	66.12	3	Vertical	0	1.85	-	34.12	8.16	30.16			
RMS	5.9242G	68.01	68.20	-0.19	55.87	3	Vertical	0	1.85	-	34.15	8.15	30.16			
PK	5.9562G	105.51	Inf	-Inf	93.31	3	Vertical	0	1.85	-	34.21	8.14	30.15			
RMS	5.9626G	95.45	Inf	-Inf	83.22	3	Vertical	0	1.85	-	34.23	8.14	30.14			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX

6105MHz_TX

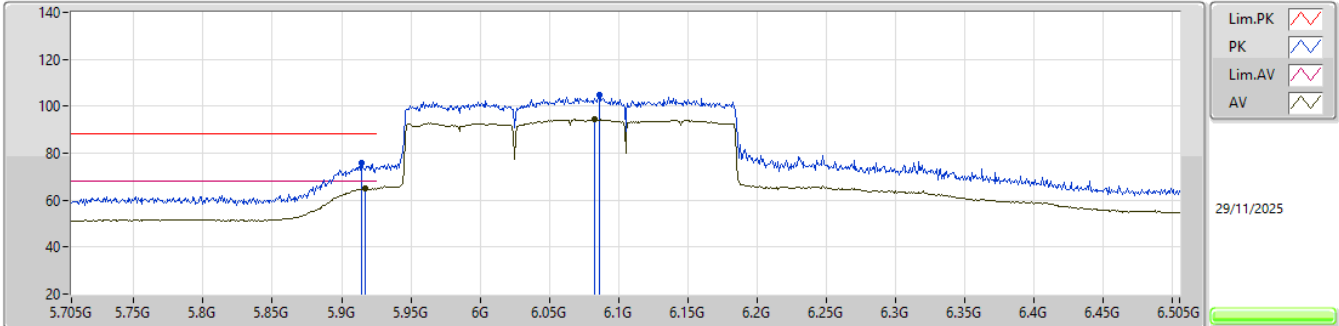


EUT_Y_1TX
Setting 87
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9146G	75.99	88.20	-12.21	63.86	3	Horizontal	360	1.80	-	34.13	8.16	30.16			
RMS	5.917G	64.90	68.20	-3.30	52.77	3	Horizontal	360	1.80	-	34.13	8.16	30.16			
PK	6.0858G	105.05	Inf	-Inf	92.67	3	Horizontal	360	1.80	-	34.47	8.07	30.16			
RMS	6.0826G	94.28	Inf	-Inf	81.90	3	Horizontal	360	1.80	-	34.47	8.07	30.16			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX

6105MHz_TX

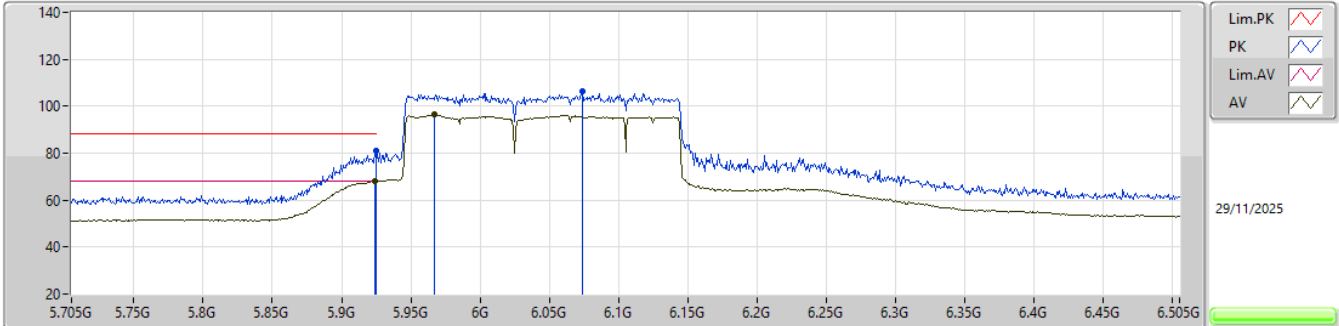


EUT_Y_1TX
Setting 86
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.925G	81.15	88.20	-7.05	69.01	3	Vertical	360	1.75	-	34.15	8.15	30.16				
RMS	5.9242G	68.09	68.20	-0.11	55.95	3	Vertical	360	1.75	-	34.15	8.15	30.16				
PK	6.0738G	106.29	Inf	-Inf	93.92	3	Vertical	360	1.75	-	34.45	8.08	30.16				
RMS	5.9674G	96.31	Inf	-Inf	84.09	3	Vertical	360	1.75	-	34.23	8.13	30.14				

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX


6105MHz_TX

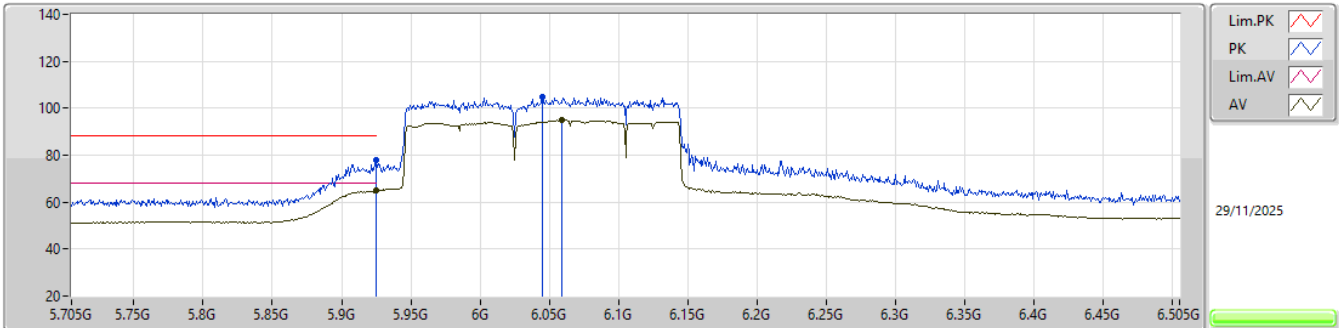EUT_Y_1TX
Setting 86
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	77.68	88.20	-10.52	65.54	3	Horizontal	0	1.99	-	34.15	8.15	30.16			
RMS	5.925G	64.93	68.20	-3.27	52.79	3	Horizontal	0	1.99	-	34.15	8.15	30.16			
PK	6.045G	104.90	Inf	-Inf	92.56	3	Horizontal	0	1.99	-	34.39	8.10	30.15			
RMS	6.0594G	95.00	Inf	-Inf	82.64	3	Horizontal	0	1.99	-	34.42	8.09	30.15			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX

5985MHz_TX

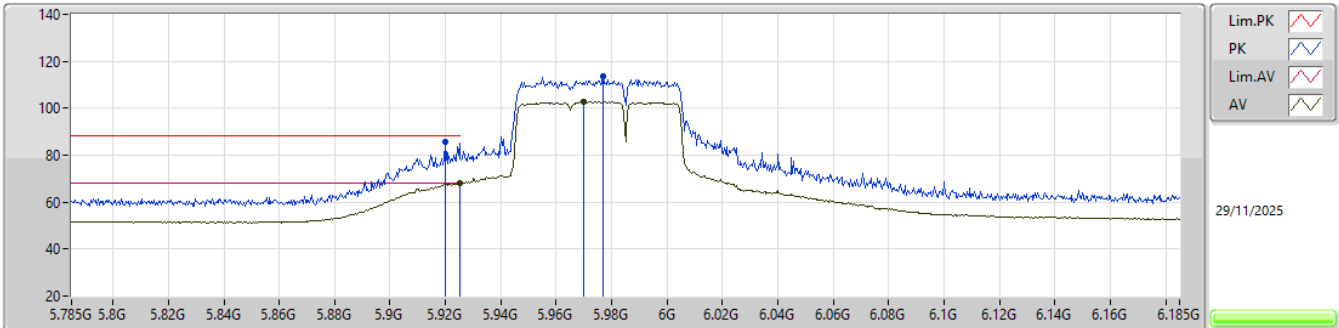


EUT_Y_2TX
Setting 77
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9198G	85.48	88.20	-2.72	73.34	3	Vertical	356	1.88	-	34.14	8.16	30.16			
RMS	5.925G	68.13	68.20	-0.07	55.99	3	Vertical	356	1.88	-	34.15	8.15	30.16			
PK	5.977G	113.45	Inf	-Inf	101.21	3	Vertical	356	1.88	-	34.25	8.13	30.14			
RMS	5.9698G	102.85	Inf	-Inf	90.62	3	Vertical	356	1.88	-	34.24	8.13	30.14			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX

5985MHz_TX

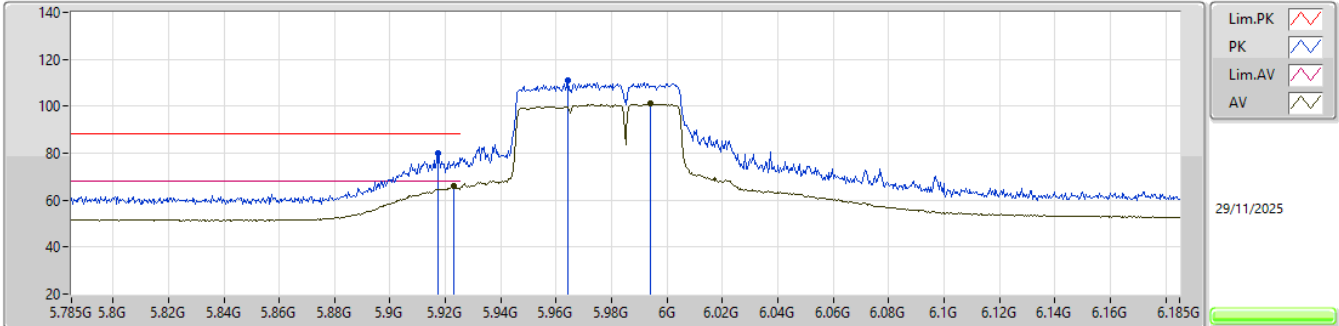


EUT_Y_2TX
Setting 77
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9174G	80.02	88.20	-8.18	67.89	3	Horizontal	0	1.50	-	34.13	8.16	30.16
RMS	5.923G	65.84	68.20	-2.36	53.70	3	Horizontal	0	1.50	-	34.15	8.15	30.16
PK	5.9642G	111.26	Inf	-Inf	99.03	3	Horizontal	0	1.50	-	34.23	8.14	30.14
RMS	5.9938G	100.96	Inf	-Inf	88.68	3	Horizontal	0	1.50	-	34.29	8.12	30.13

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484+242 MRU 6_2TX

6025MHz_TX

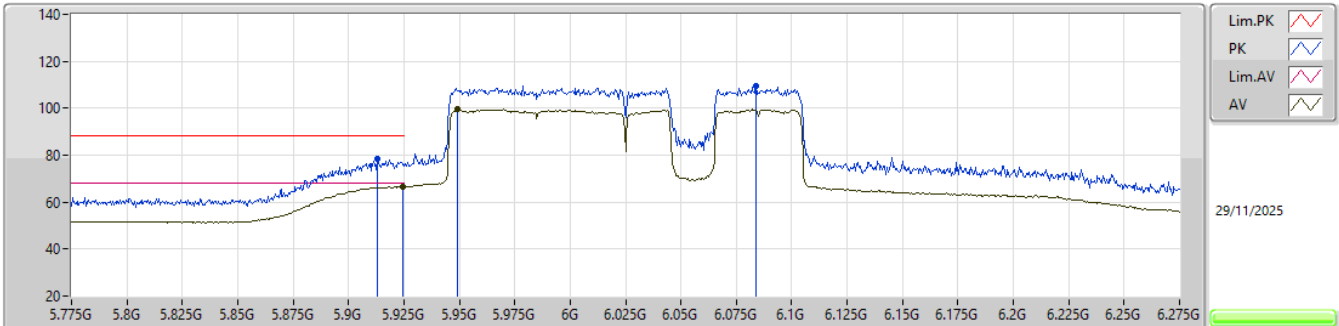


EUT_Y_2TX
Setting 78
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.913G	78.52	88.20	-9.68	66.39	3	Vertical	360	1.84	-	34.13	8.16	30.16			
RMS	5.9245G	66.72	68.20	-1.48	54.58	3	Vertical	360	1.84	-	34.15	8.15	30.16			
PK	6.084G	109.48	Inf	-Inf	97.10	3	Vertical	360	1.84	-	34.47	8.07	30.16			
RMS	5.949G	99.58	Inf	-Inf	87.39	3	Vertical	360	1.84	-	34.20	8.14	30.15			

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484+242 MRU 6_2TX

6025MHz_TX

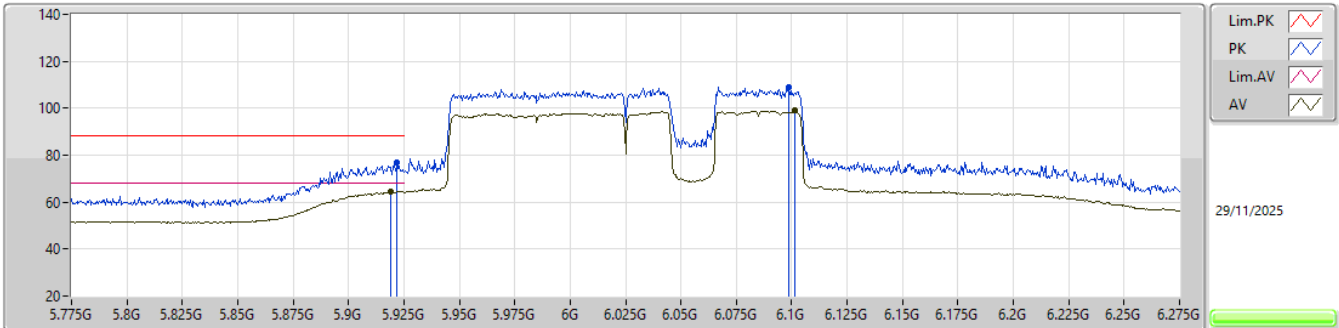


EUT_Y_2TX
Setting 78
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.922G	77.09	88.20	-11.11	64.95	3	Horizontal	0	1.52	-	34.14	8.16	30.16
RMS	5.919G	64.60	68.20	-3.60	52.46	3	Horizontal	0	1.52	-	34.14	8.16	30.16
PK	6.0985G	108.99	Inf	-Inf	96.59	3	Horizontal	0	1.52	-	34.50	8.07	30.17
RMS	6.1015G	99.03	Inf	-Inf	86.64	3	Horizontal	0	1.52	-	34.50	8.06	30.17

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX

6025MHz_TX

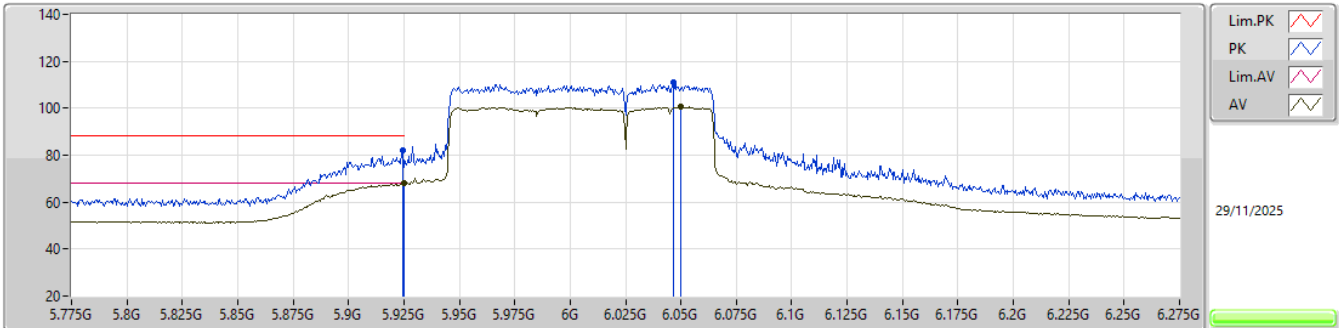


EUT_Y_2TX
Setting 78
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9245G	81.98	88.20	-6.22	69.84	3	Vertical	360	1.55	-	34.15	8.15	30.16			
RMS	5.925G	67.85	68.20	-0.35	55.71	3	Vertical	360	1.55	-	34.15	8.15	30.16			
PK	6.0465G	110.99	Inf	-Inf	98.66	3	Vertical	360	1.55	-	34.39	8.09	30.15			
RMS	6.05G	100.73	Inf	-Inf	88.39	3	Vertical	360	1.55	-	34.40	8.09	30.15			

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX

6025MHz_TX

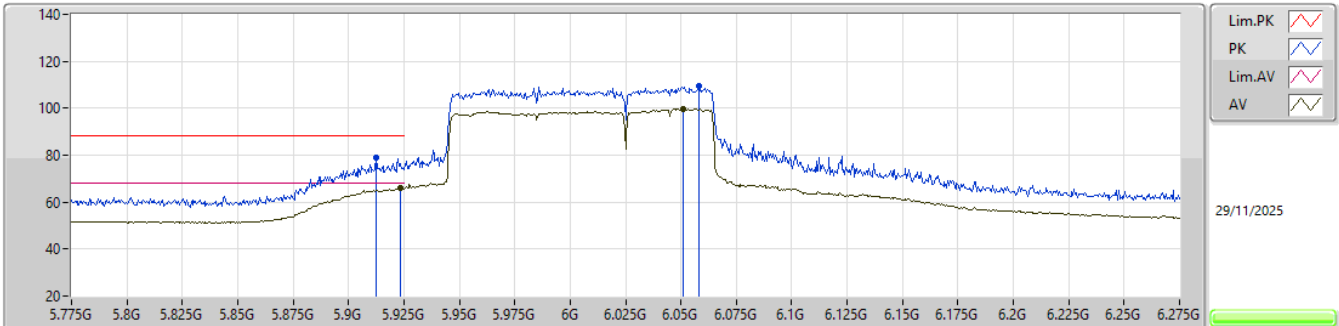


EUT_Y_2TX
Setting 78
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9125G	79.21	88.20	-8.99	67.09	3	Horizontal	0	1.25	-	34.12	8.16	30.16			
RMS	5.9235G	66.04	68.20	-2.16	53.90	3	Horizontal	0	1.25	-	34.15	8.15	30.16			
PK	6.058G	109.33	Inf	-Inf	96.97	3	Horizontal	0	1.25	-	34.42	8.09	30.15			
RMS	6.051G	99.68	Inf	-Inf	87.34	3	Horizontal	0	1.25	-	34.40	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX

6105MHz_TX

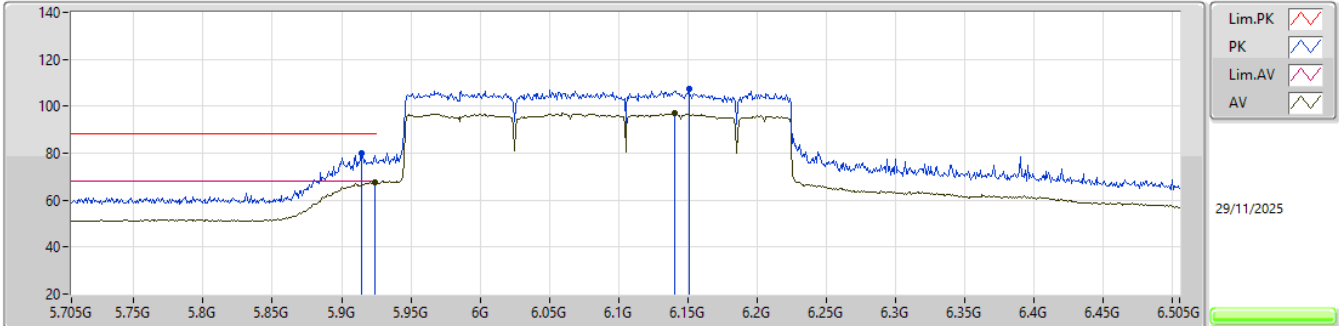


EUT_Y_2TX
Setting 85
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9146G	80.04	88.20	-8.16	67.91	3	Vertical	358	1.80	-	34.13	8.16	30.16
RMS	5.9242G	67.59	68.20	-0.61	55.45	3	Vertical	358	1.80	-	34.15	8.15	30.16
PK	6.1506G	107.16	Inf	-Inf	94.71	3	Vertical	358	1.80	-	34.60	8.04	30.19
RMS	6.1402G	96.98	Inf	-Inf	84.55	3	Vertical	358	1.80	-	34.58	8.04	30.19

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX

6105MHz_TX

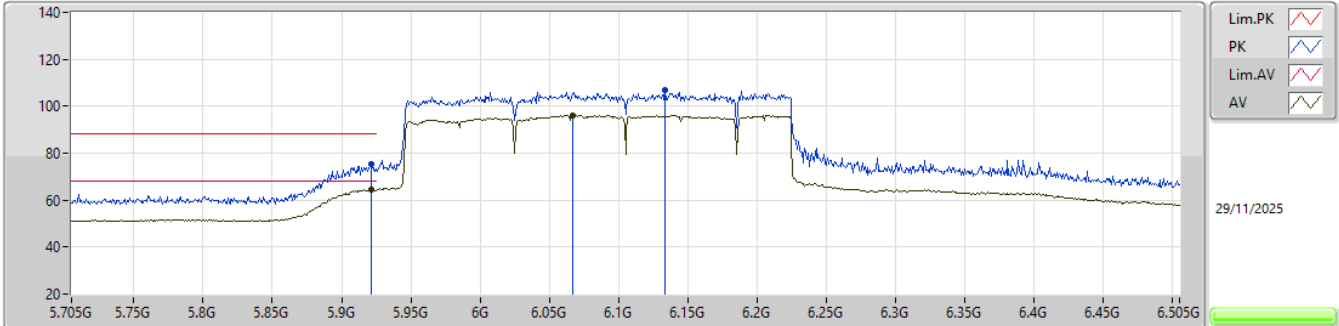


EUT_Y_2TX
Setting 85
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.921G	75.17	88.20	-13.03	63.03	3	Horizontal	0	1.42	-	34.14	8.16	30.16			
RMS	5.921G	64.38	68.20	-3.82	52.24	3	Horizontal	0	1.42	-	34.14	8.16	30.16			
PK	6.1338G	107.05	Inf	-Inf	94.61	3	Horizontal	0	1.42	-	34.57	8.05	30.18			
RMS	6.0666G	96.29	Inf	-Inf	83.94	3	Horizontal	0	1.42	-	34.43	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX

6105MHz_TX

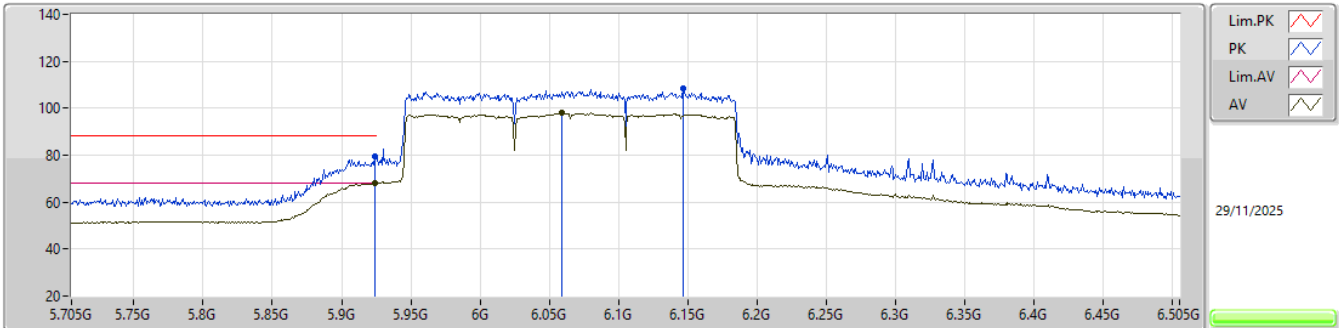


EUT_Y_2TX
Setting 85
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9242G	79.40	88.20	-8.80	67.26	3	Vertical	358	1.85	-	34.15	8.15	30.16			
RMS	5.9242G	68.00	68.20	-0.20	55.86	3	Vertical	358	1.85	-	34.15	8.15	30.16			
PK	6.1466G	108.44	Inf	-Inf	96.00	3	Vertical	358	1.85	-	34.59	8.04	30.19			
RMS	6.0594G	98.04	Inf	-Inf	85.68	3	Vertical	358	1.85	-	34.42	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX

6105MHz_TX

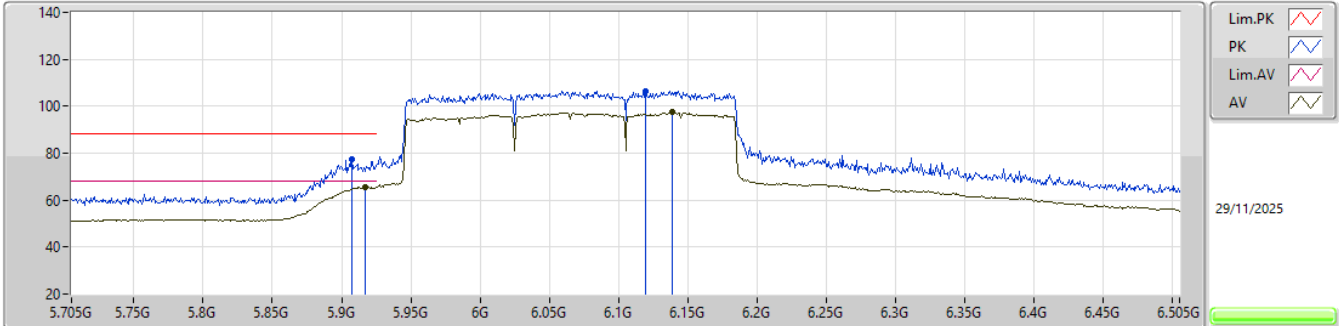


EUT_Y_2TX
Setting 85
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9074G	77.41	88.20	-10.79	65.30	3	Horizontal	0	1.30	-	34.11	8.16	30.16			
RMS	5.917G	65.59	68.20	-2.61	53.46	3	Horizontal	0	1.30	-	34.13	8.16	30.16			
PK	6.1194G	106.53	Inf	-Inf	94.12	3	Horizontal	0	1.30	-	34.54	8.05	30.18			
RMS	6.1386G	97.35	Inf	-Inf	84.92	3	Horizontal	0	1.30	-	34.58	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX

6105MHz_TX

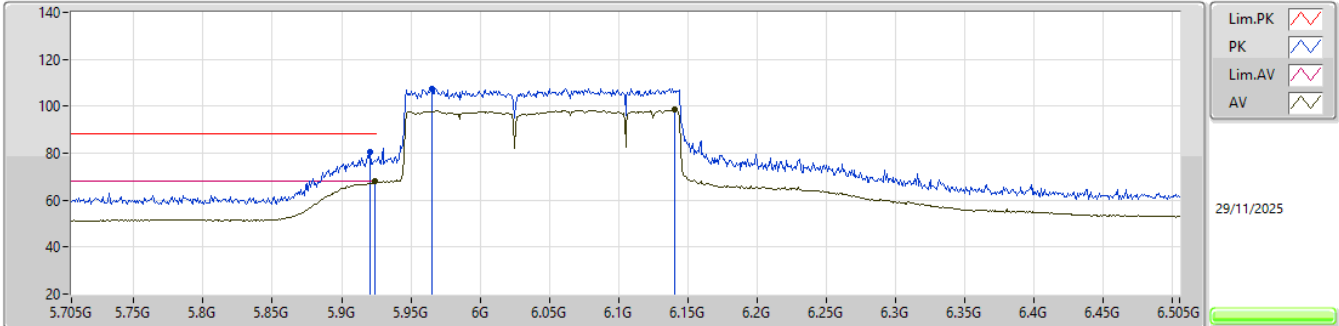


EUT_Y_2TX
Setting 83
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9202G	80.47	88.20	-7.73	68.33	3	Vertical	358	1.82	-	34.14	8.16	30.16			
RMS	5.9242G	67.94	68.20	-0.26	55.80	3	Vertical	358	1.82	-	34.15	8.15	30.16			
PK	5.965G	107.66	Inf	-Inf	95.43	3	Vertical	358	1.82	-	34.23	8.14	30.14			
RMS	6.1402G	98.59	Inf	-Inf	86.16	3	Vertical	358	1.82	-	34.58	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX

6105MHz_TX

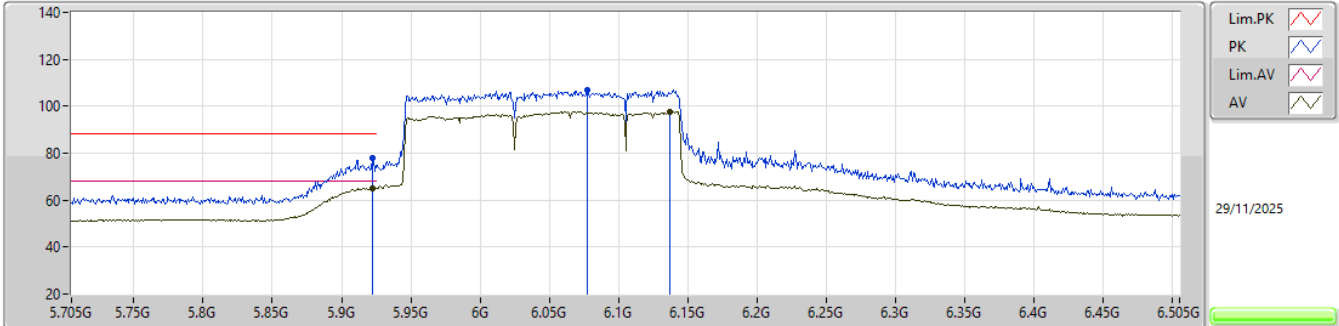


EUT_Y_2TX
Setting 83
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9226G	77.75	88.20	-10.45	65.61	3	Horizontal	0	1.38	-	34.15	8.15	30.16			
RMS	5.9226G	65.14	68.20	-3.06	53.00	3	Horizontal	0	1.38	-	34.15	8.15	30.16			
PK	6.077G	106.75	Inf	-Inf	94.38	3	Horizontal	0	1.38	-	34.45	8.08	30.16			
RMS	6.137G	97.71	Inf	-Inf	85.28	3	Horizontal	0	1.38	-	34.57	8.04	30.18			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

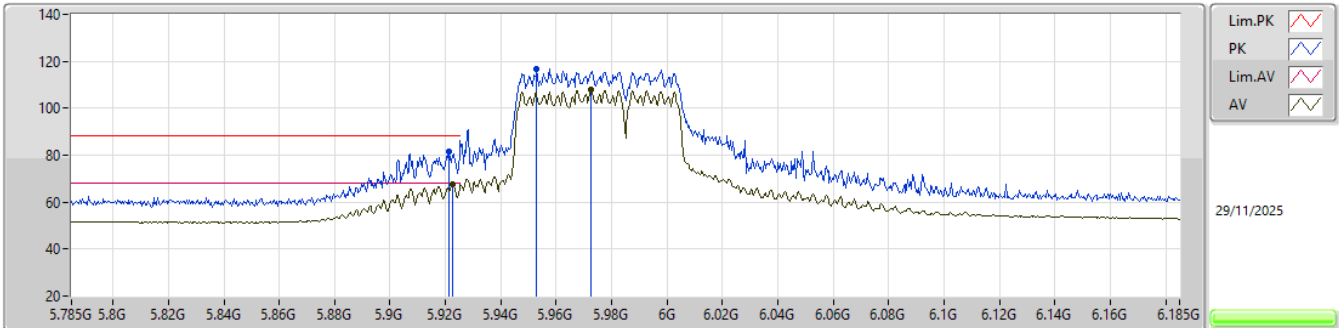EUT_Y_4TX
Setting 73
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9214G	81.54	88.20	-6.66	69.40	3	Vertical	356	1.85	-	34.14	8.16	30.16			
RMS	5.9226G	67.83	68.20	-0.37	55.69	3	Vertical	356	1.85	-	34.15	8.15	30.16			
PK	5.953G	116.62	Inf	-Inf	104.42	3	Vertical	356	1.85	-	34.21	8.14	30.15			
RMS	5.9726G	107.70	Inf	-Inf	95.46	3	Vertical	356	1.85	-	34.25	8.13	30.14			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

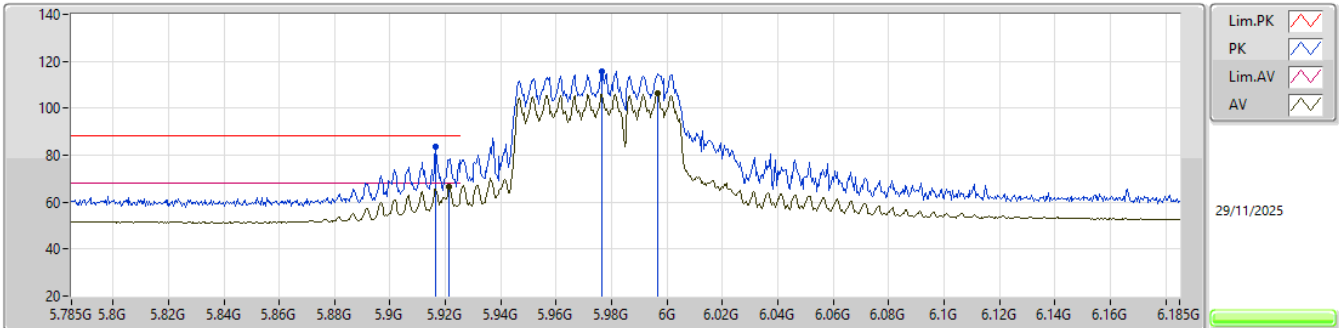


EUT_Y_4TX
Setting 73
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9166G	83.56	88.20	-4.64	71.43	3	Horizontal	3	1.95	-	34.13	8.16	30.16				
RMS	5.9214G	66.32	68.20	-1.88	54.18	3	Horizontal	3	1.95	-	34.14	8.16	30.16				
PK	5.9766G	115.91	Inf	-Inf	103.67	3	Horizontal	3	1.95	-	34.25	8.13	30.14				
RMS	5.9966G	106.15	Inf	-Inf	93.87	3	Horizontal	3	1.95	-	34.29	8.12	30.13				

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

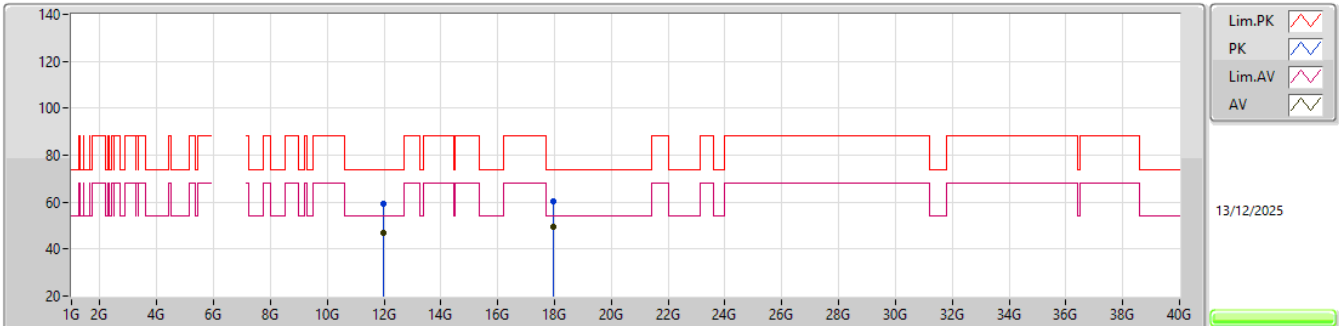EUT_Y_4TX
Setting 73
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.97159G	59.54	74.00	-14.46	41.53	3	Vertical	25	2.22	-	38.74	12.80	33.53			
AV	11.96806G	47.12	54.00	-6.88	29.11	3	Vertical	25	2.22	-	38.74	12.80	33.53			
PK	17.95927G	60.20	74.00	-13.80	34.98	3	Vertical	188	1.81	-	42.64	15.59	33.01			
AV	17.95934G	49.36	54.00	-4.64	24.14	3	Vertical	188	1.81	-	42.64	15.59	33.01			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

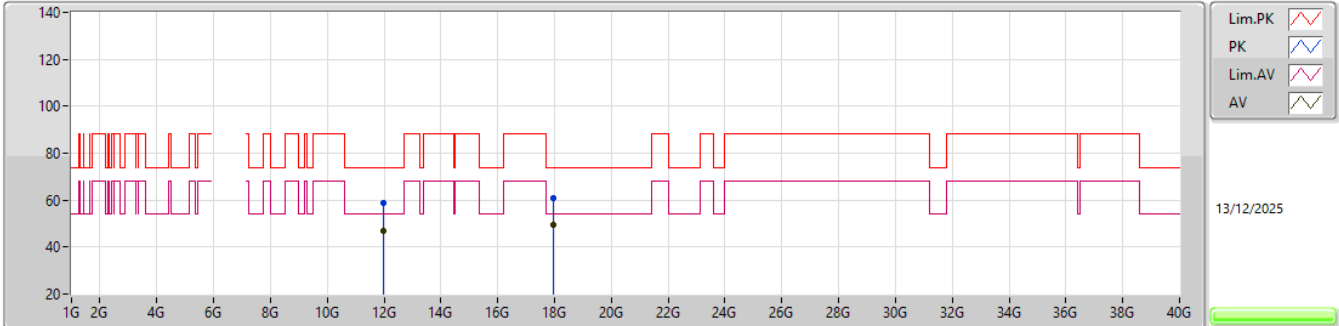EUT_Y_4TX
Setting 73
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.97388G	58.76	74.00	-15.24	40.74	3	Horizontal	74	2.53	-	38.75	12.80	33.53			
AV	11.96689G	47.01	54.00	-6.99	29.01	3	Horizontal	74	2.53	-	38.73	12.80	33.53			
PK	17.95268G	60.70	74.00	-13.30	35.50	3	Horizontal	299	2.35	-	42.61	15.59	33.00			
AV	17.95929G	49.41	54.00	-4.59	24.19	3	Horizontal	299	2.35	-	42.64	15.59	33.01			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

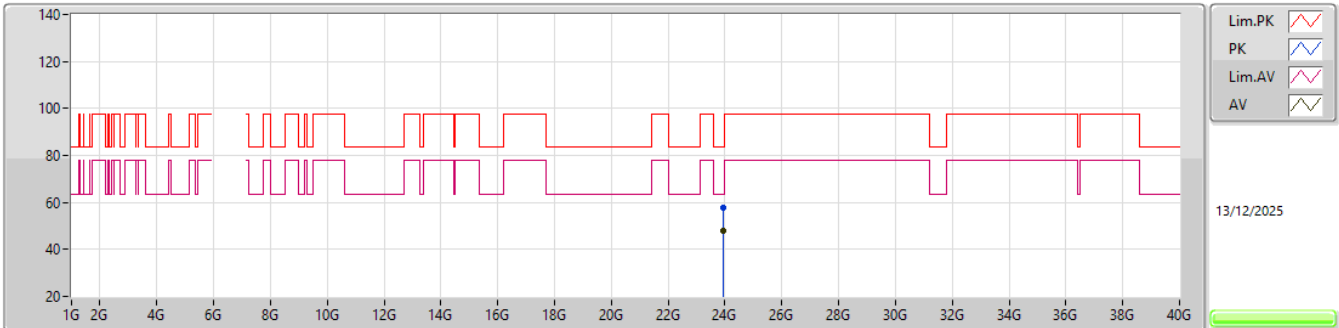EUT Y_4TX
Setting 73
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	23.93715G	57.61	83.54	-25.93	48.68	1	Vertical	353	1.25	-	38.97	17.86	47.90			
AV	23.93892G	47.87	63.54	-15.67	38.93	1	Vertical	353	1.25	-	38.98	17.86	47.90			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

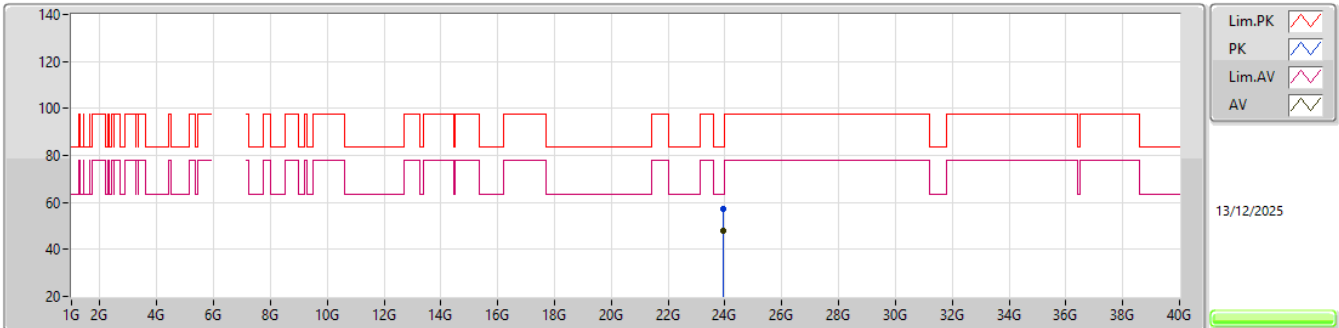EUT_Y_4TX
Setting 73
05-X-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.942G	57.46	83.54	-26.08	48.52	1	Horizontal	156	1.68	-	38.98	17.86	47.90			
AV	23.94497G	47.98	63.54	-15.56	39.03	1	Horizontal	156	1.68	-	38.99	17.86	47.90			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+242 MRU 6_4TX

6025MHz_TX

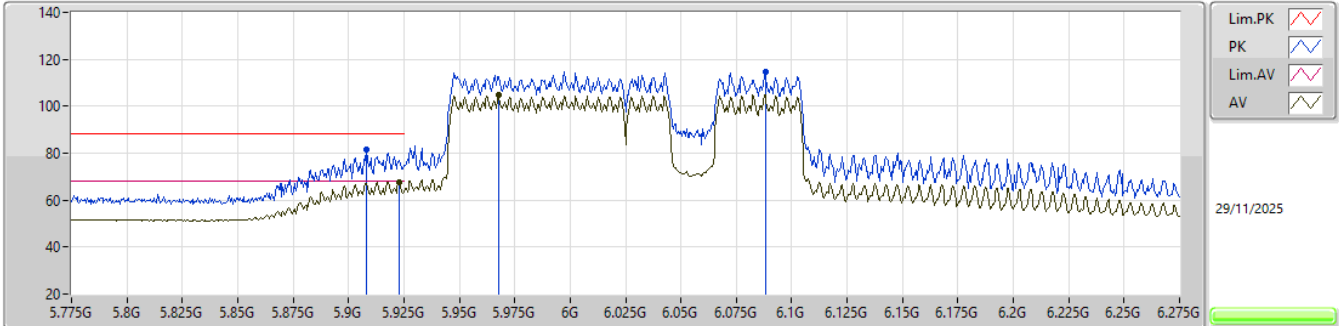


EUT_Y_4TX
Setting 73
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.908G	81.38	88.20	-6.82	69.26	3	Vertical	356	1.78	-	34.12	8.16	30.16			
RMS	5.923G	67.65	68.20	-0.55	55.51	3	Vertical	356	1.78	-	34.15	8.15	30.16			
PK	6.088G	114.76	Inf	-Inf	102.38	3	Vertical	356	1.78	-	34.48	8.07	30.17			
RMS	5.9675G	104.88	Inf	-Inf	92.65	3	Vertical	356	1.78	-	34.24	8.13	30.14			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+242 MRU 6_4TX

6025MHz_TX

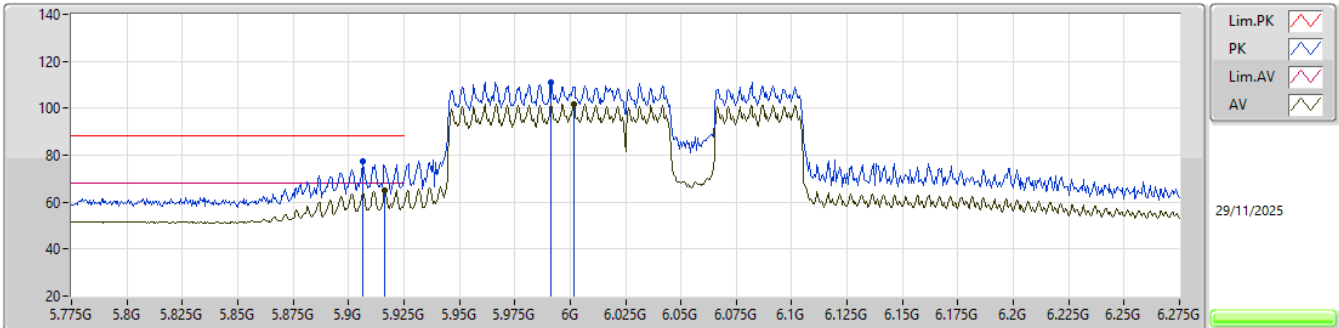


EUT_Y_4TX
Setting 73
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9065G	77.30	88.20	-10.90	65.19	3	Horizontal	5	1.75	-	34.11	8.16	30.16			
RMS	5.9165G	64.80	68.20	-3.40	52.67	3	Horizontal	5	1.75	-	34.13	8.16	30.16			
PK	5.9915G	111.23	Inf	-Inf	98.96	3	Horizontal	5	1.75	-	34.28	8.12	30.13			
RMS	6.0015G	101.97	Inf	-Inf	89.68	3	Horizontal	5	1.75	-	34.30	8.12	30.13			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+242 MRU 6_4TX


6025MHz_TX

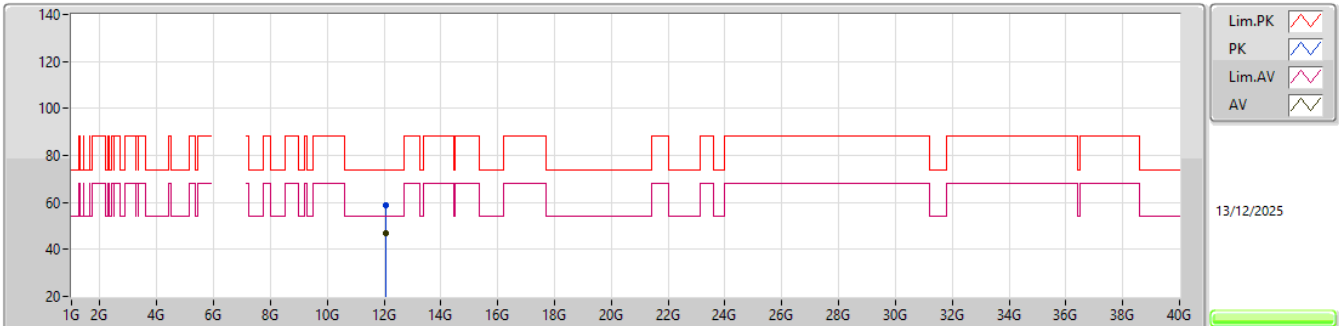EUT Y_4TX
Setting 73
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.05G	58.54	74.00	-15.46	40.38	3	Vertical	166	1.42	-	38.90	12.84	33.58			
AV	12.05439G	46.88	54.00	-7.12	28.71	3	Vertical	166	1.42	-	38.91	12.85	33.59			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+242 MRU 6_4TX

6025MHz_TX

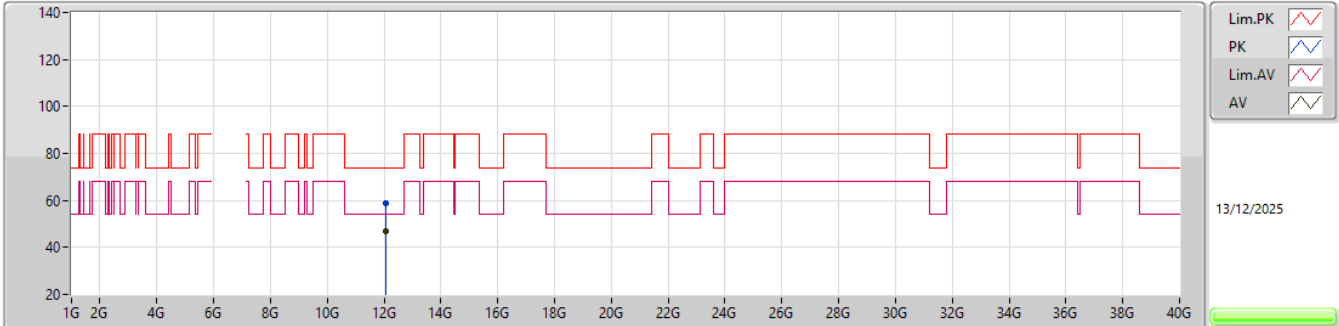


EUT Y_4TX
Setting 73
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.05353G	58.88	74.00	-15.12	40.71	3	Horizontal	107	2.13	-	38.91	12.84	33.58			
AV	12.05471G	46.76	54.00	-7.24	28.59	3	Horizontal	107	2.13	-	38.91	12.85	33.59			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+242 MRU 6_4TX


6025MHz_TX

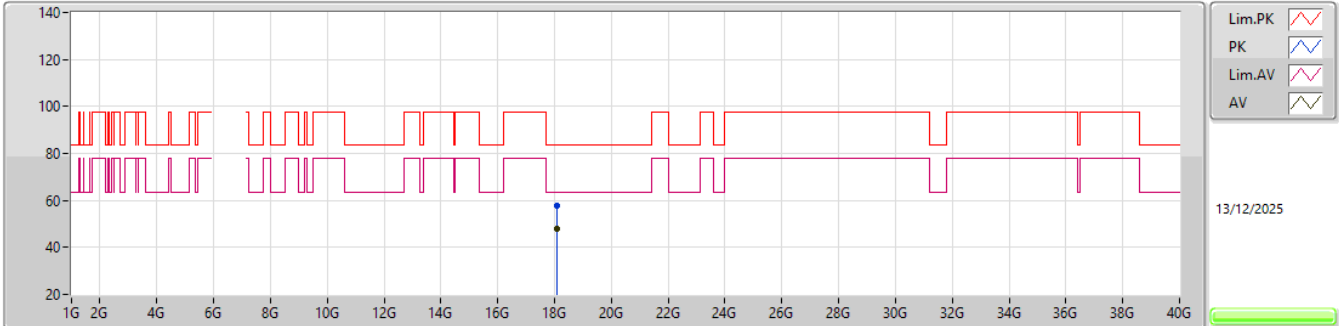EUT Y_4TX
Setting 73
05-X-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07227G	57.55	83.54	-25.99	53.00	1	Vertical	28	1.31	-	37.24	15.74	48.43			
AV	18.07658G	47.84	63.54	-15.70	43.28	1	Vertical	28	1.31	-	37.25	15.74	48.43			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+242 MRU 6_4TX


6025MHz_TX

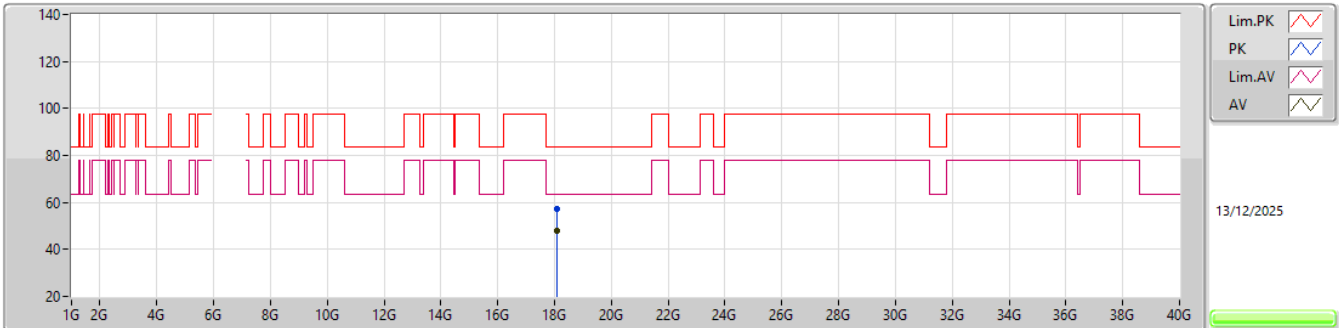EUT Y_4TX
Setting 73
05-X-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07297G	57.25	83.54	-26.29	52.69	1	Horizontal	320	1.77	-	37.25	15.74	48.43			
AV	18.0731G	47.82	63.54	-15.72	43.26	1	Horizontal	320	1.77	-	37.25	15.74	48.43			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX


6025MHz_TX

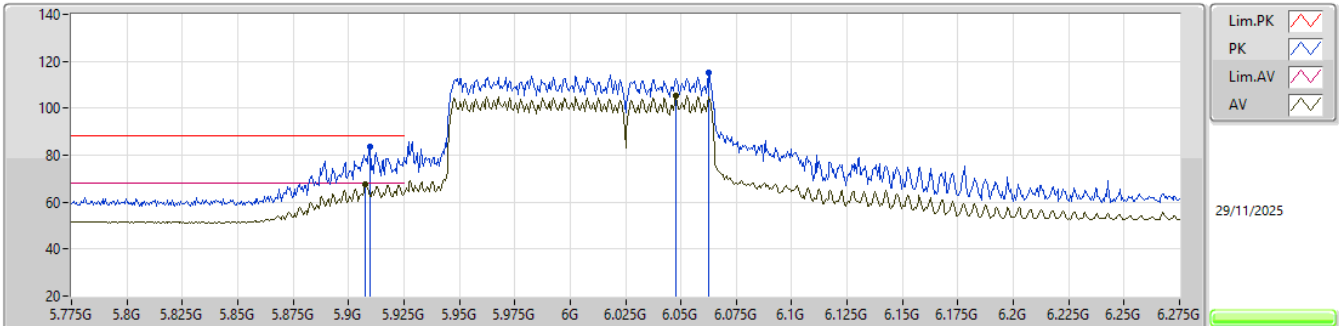EUT_Y_4TX
Setting 72
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9095G	83.37	88.20	-4.83	71.25	3	Vertical	360	1.80	-	34.12	8.16	30.16			
RMS	5.9075G	67.55	68.20	-0.65	55.43	3	Vertical	360	1.80	-	34.12	8.16	30.16			
PK	6.0625G	114.96	Inf	-Inf	102.60	3	Vertical	360	1.80	-	34.42	8.09	30.15			
RMS	6.0475G	105.31	Inf	-Inf	92.98	3	Vertical	360	1.80	-	34.39	8.09	30.15			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

6025MHz_TX

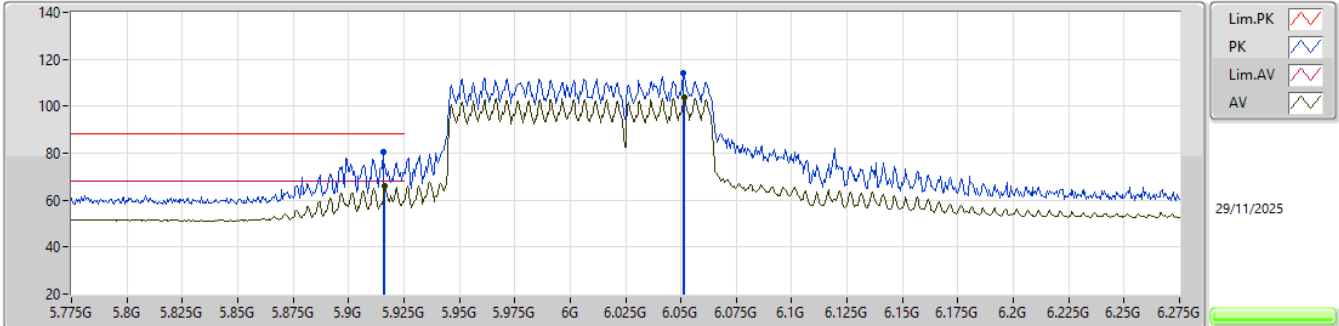


EUT_Y_4TX
Setting 72
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9155G	80.71	88.20	-7.49	68.58	3	Horizontal	1	2.18	-	34.13	8.16	30.16			
RMS	5.9165G	66.13	68.20	-2.07	54.00	3	Horizontal	1	2.18	-	34.13	8.16	30.16			
PK	6.051G	113.93	Inf	-Inf	101.59	3	Horizontal	1	2.18	-	34.40	8.09	30.15			
RMS	6.0515G	103.54	Inf	-Inf	91.20	3	Horizontal	1	2.18	-	34.40	8.09	30.15			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

6025MHz_TX

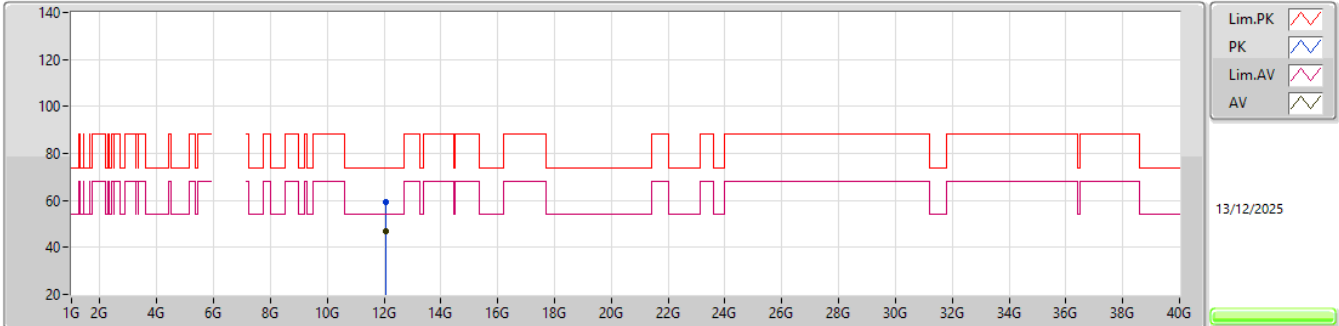


EUT Y_4TX
Setting 72
05-X-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.0548G	59.39	74.00	-14.61	41.22	3	Vertical	6	1.39	-	38.91	12.85	33.59			
AV	12.0541G	46.86	54.00	-7.14	28.69	3	Vertical	6	1.39	-	38.91	12.85	33.59			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX


6025MHz_TX

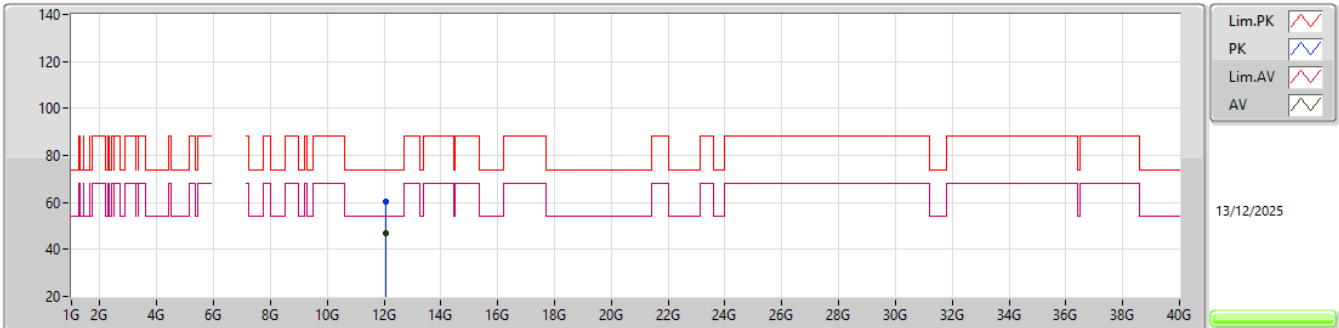EUT Y_4TX
Setting 72
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.05319G	60.16	74.00	-13.84	41.99	3	Horizontal	30	2.87	-	38.91	12.84	33.58			
AV	12.05465G	46.96	54.00	-7.04	28.79	3	Horizontal	30	2.87	-	38.91	12.85	33.59			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX


6025MHz_TX

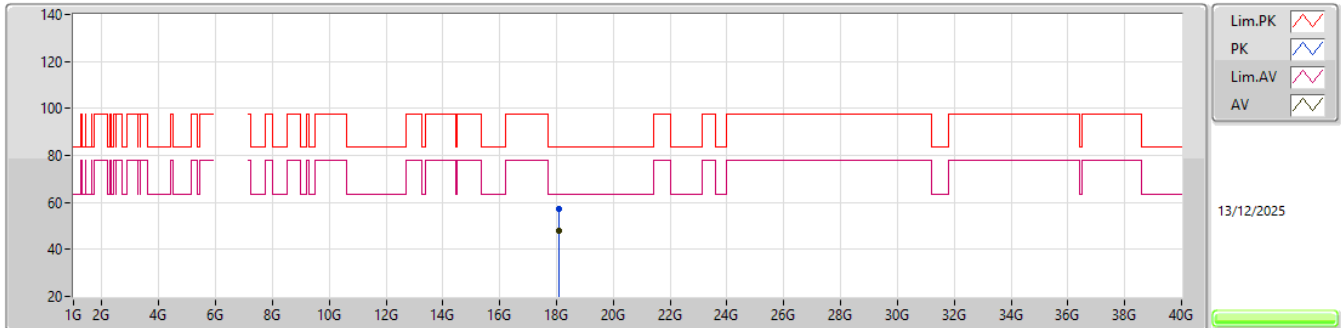EUT Y_4TX
Setting 72
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.07651G	57.42	83.54	-26.12	52.86	1	Vertical	328	1.79	-	37.25	15.74	48.43			
AV	18.07012G	47.86	63.54	-15.68	43.31	1	Vertical	328	1.79	-	37.24	15.74	48.43			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX


6025MHz_TX

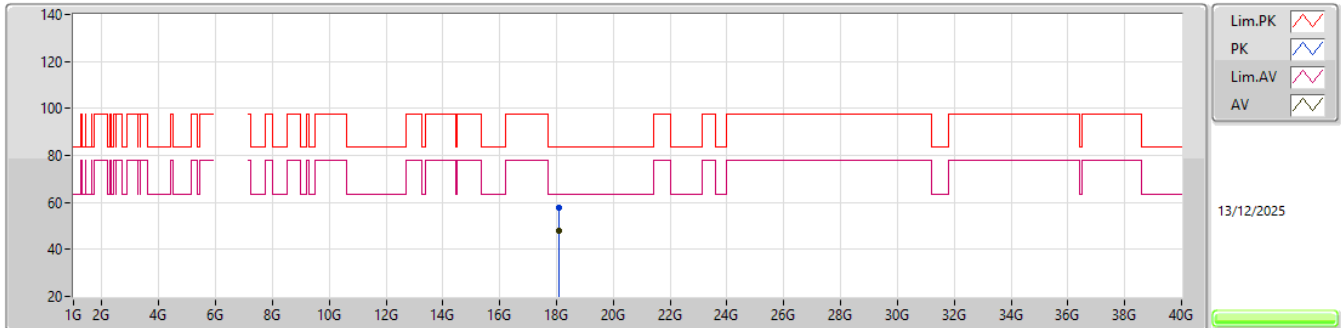EUT Y_4TX
Setting 72
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.07462G	57.88	83.54	-25.66	53.32	1	Horizontal	127	1.33	-	37.25	15.74	48.43			
AV	18.07144G	47.95	63.54	-15.59	43.40	1	Horizontal	127	1.33	-	37.24	15.74	48.43			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX

6105MHz_TX

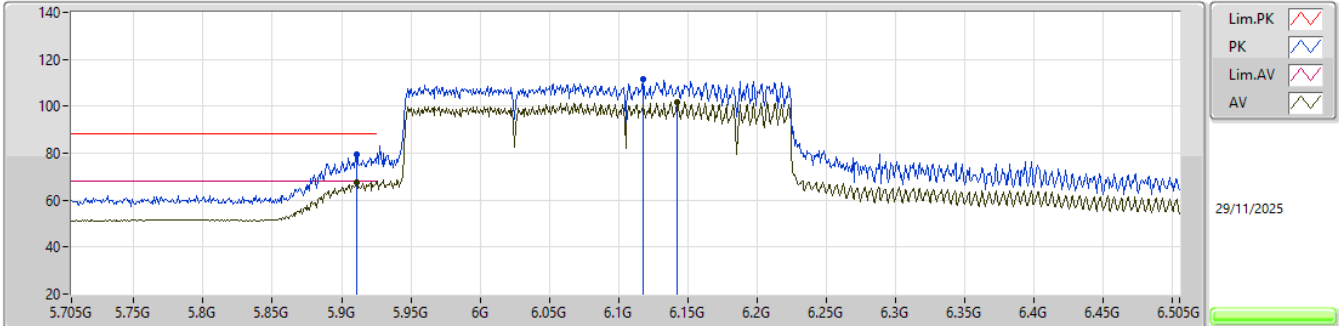


EUT_Y_4TX
Setting 78
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9106G	79.40	88.20	-8.80	67.28	3	Vertical	360	1.85	-	34.12	8.16	30.16				
RMS	5.9106G	67.78	68.20	-0.42	55.66	3	Vertical	360	1.85	-	34.12	8.16	30.16				
PK	6.1178G	111.50	Inf	-Inf	99.08	3	Vertical	360	1.85	-	34.54	8.06	30.18				
RMS	6.1426G	101.76	Inf	-Inf	89.32	3	Vertical	360	1.85	-	34.59	8.04	30.19				

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX


6105MHz_TX

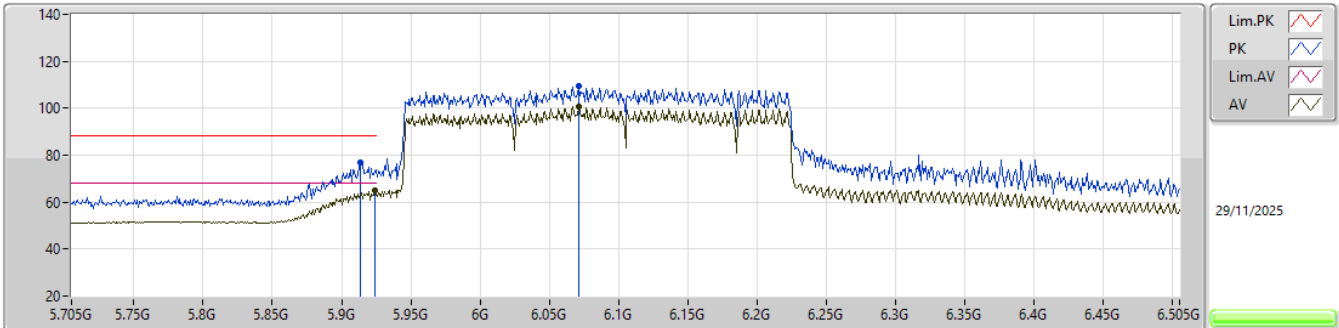EUT_Y_4TX
Setting 78
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9138G	76.78	88.20	-11.42	64.65	3	Horizontal	0	2.65	-	34.13	8.16	30.16			
RMS	5.9242G	64.84	68.20	-3.36	52.70	3	Horizontal	0	2.65	-	34.15	8.15	30.16			
PK	6.0714G	109.32	Inf	-Inf	96.96	3	Horizontal	0	2.65	-	34.44	8.08	30.16			
RMS	6.0714G	100.54	Inf	-Inf	88.18	3	Horizontal	0	2.65	-	34.44	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX


6105MHz_TX

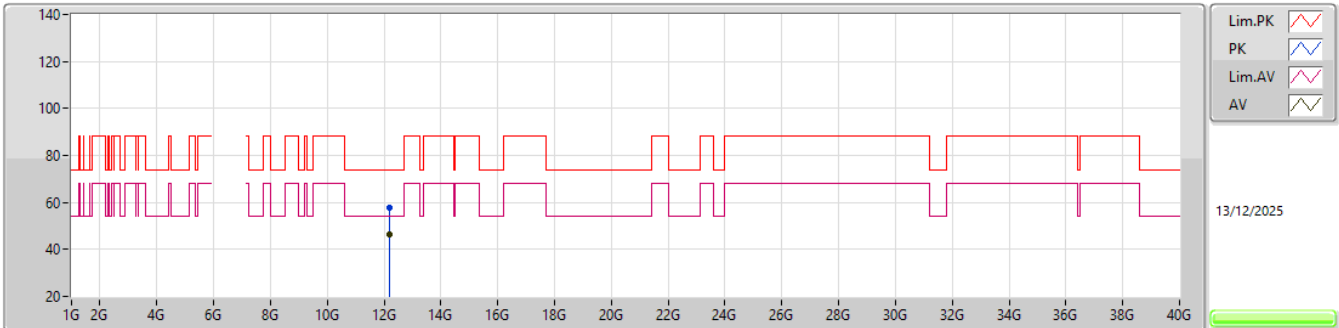EUT Y_4TX
Setting 78
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.20567G	57.67	74.00	-16.33	39.28	3	Vertical	238	1.87	-	39.10	12.92	33.63			
AV	12.20534G	46.30	54.00	-7.70	27.91	3	Vertical	238	1.87	-	39.10	12.92	33.63			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX


6105MHz_TX

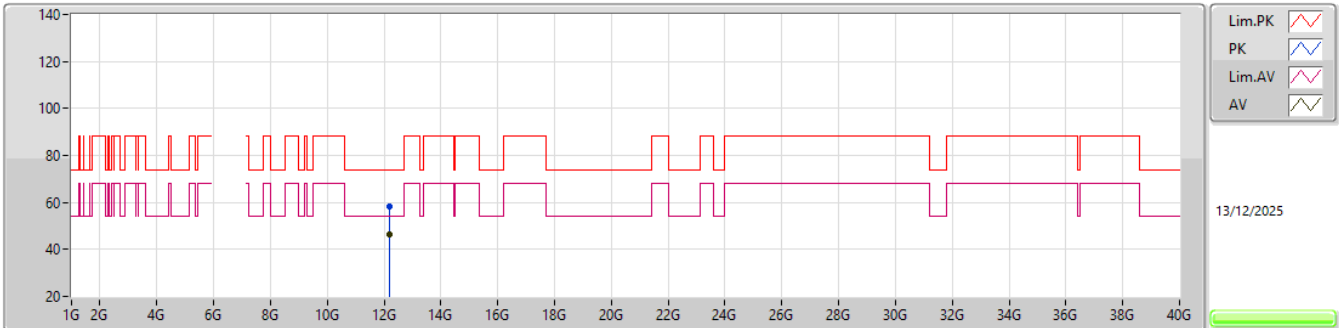EUT Y_4TX
Setting 78
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.21299G	58.17	74.00	-15.83	39.78	3	Horizontal	222	1.72	-	39.10	12.92	33.63			
AV	12.20575G	46.35	54.00	-7.65	27.96	3	Horizontal	222	1.72	-	39.10	12.92	33.63			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX


6105MHz_TX

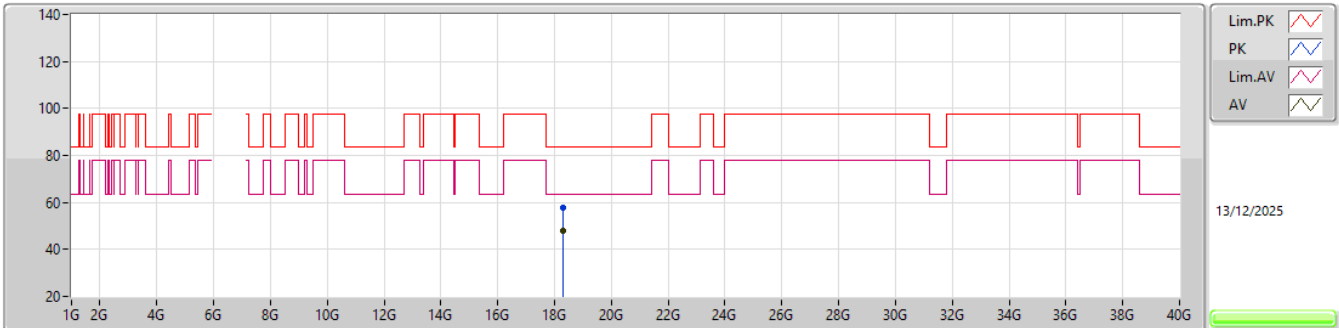EUT_Y_4TX
Setting 78
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.31657G	57.51	83.54	-26.03	52.74	1	Vertical	190	1.42	-	37.37	15.93	48.53			
AV	18.31926G	47.85	63.54	-15.69	43.07	1	Vertical	190	1.42	-	37.38	15.93	48.53			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX


6105MHz_TX

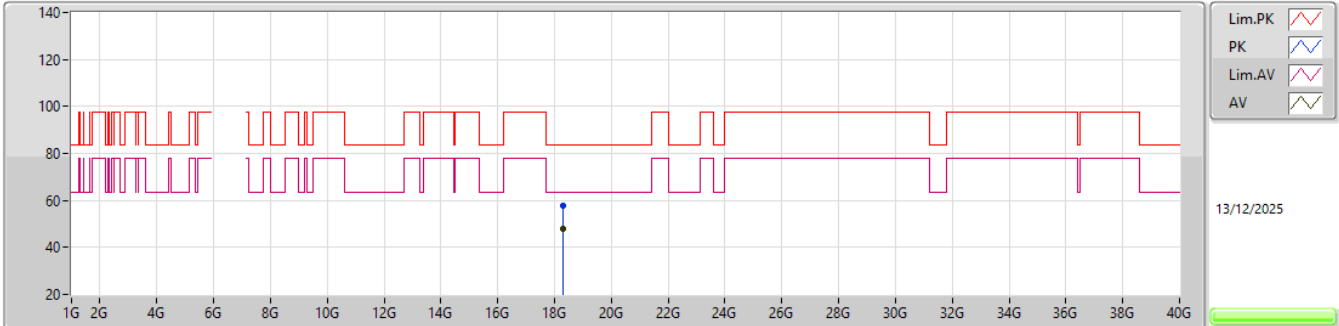EUT Y_4TX
Setting 78
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.31034G	57.61	83.54	-25.93	52.86	1	Horizontal	32	1.83	-	37.34	15.93	48.52			
AV	18.31939G	47.96	63.54	-15.58	43.18	1	Horizontal	32	1.83	-	37.38	15.93	48.53			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

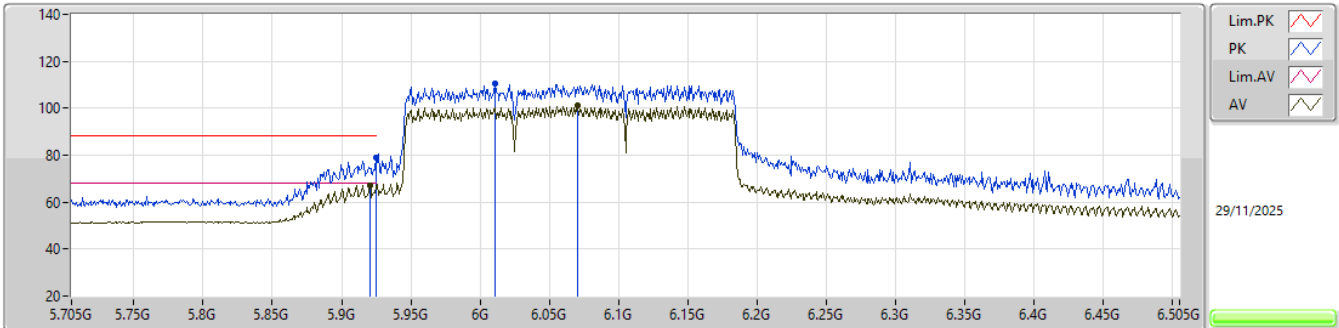


EUT_Y_4TX
Setting 76
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	79.05	88.20	-9.15	66.91	3	Vertical	351	2.19	-	34.15	8.15	30.16			
RMS	5.9202G	67.15	68.20	-1.05	55.01	3	Vertical	351	2.19	-	34.14	8.16	30.16			
PK	6.0106G	110.54	Inf	-Inf	98.24	3	Vertical	351	2.19	-	34.32	8.11	30.13			
RMS	6.0706G	101.09	Inf	-Inf	88.73	3	Vertical	351	2.19	-	34.44	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

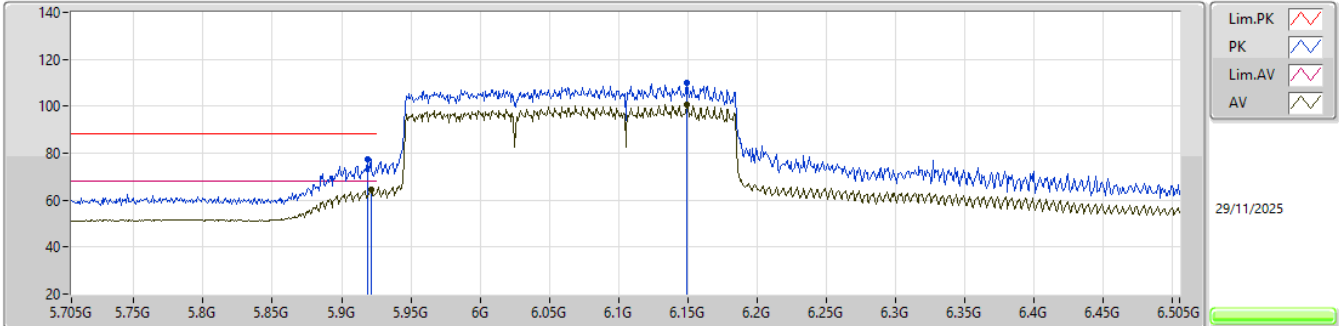


EUT_Y_4TX
Setting 76
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9186G	77.48	88.20	-10.72	65.34	3	Horizontal	8	1.25	-	34.14	8.16	30.16			
RMS	5.9218G	64.47	68.20	-3.73	52.33	3	Horizontal	8	1.25	-	34.14	8.16	30.16			
PK	6.149G	110.21	Inf	-Inf	97.76	3	Horizontal	8	1.25	-	34.60	8.04	30.19			
RMS	6.149G	100.52	Inf	-Inf	88.07	3	Horizontal	8	1.25	-	34.60	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

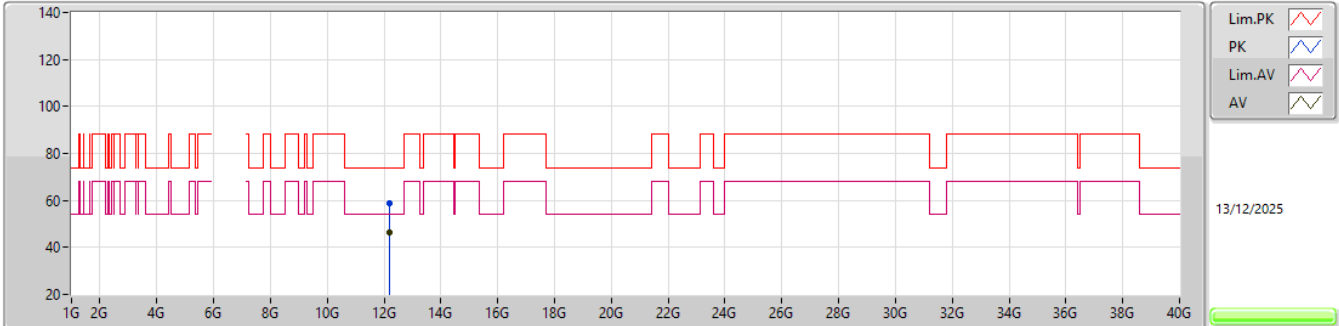


EUT Y_4TX
Setting 76
05-X-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.20636G	58.63	74.00	-15.37	40.24	3	Vertical	352	1.51	-	39.10	12.92	33.63			
AV	12.20607G	46.35	54.00	-7.65	27.96	3	Vertical	352	1.51	-	39.10	12.92	33.63			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX


6105MHz_TX

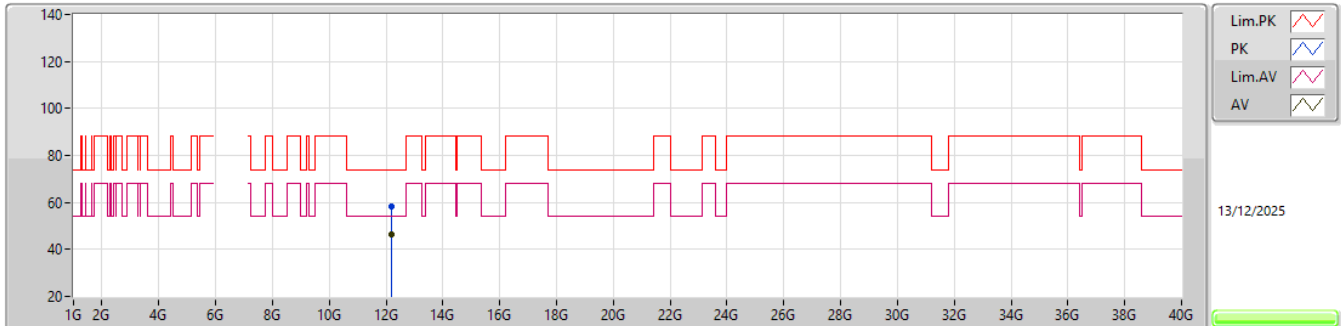EUT Y_4TX
Setting 76
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.21167G	58.38	74.00	-15.62	39.99	3	Horizontal	177	1.21	-	39.10	12.92	33.63			
AV	12.20754G	46.42	54.00	-7.58	28.03	3	Horizontal	177	1.21	-	39.10	12.92	33.63			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX


6105MHz_TX

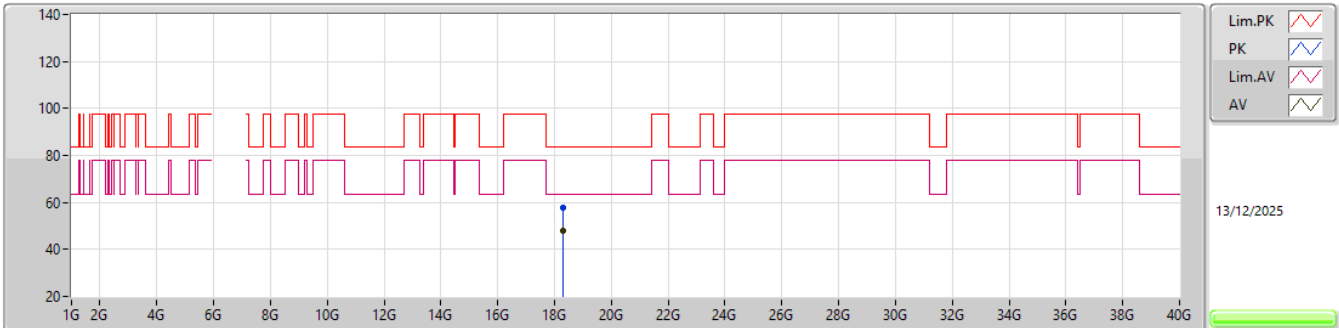EUT Y_4TX
Setting 76
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.31004G	57.77	83.54	-25.77	53.03	1	Vertical	279	2.02	-	37.34	15.92	48.52			
AV	18.31984G	47.99	63.54	-15.55	43.21	1	Vertical	279	2.02	-	37.38	15.93	48.53			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX


6105MHz_TX

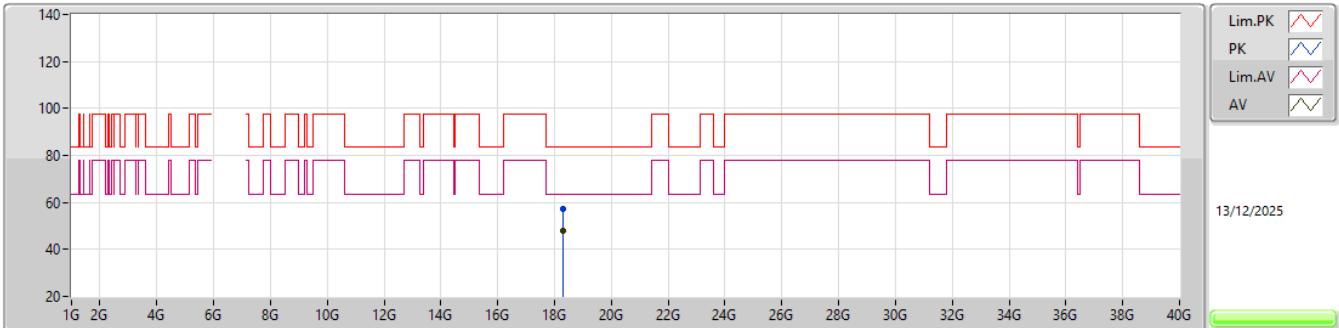EUT_Y_4TX
Setting 76
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.31941G	57.17	83.54	-26.37	52.39	1	Horizontal	70	1.90	-	37.38	15.93	48.53			
AV	18.31881G	47.94	63.54	-15.60	43.16	1	Horizontal	70	1.90	-	37.38	15.93	48.53			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

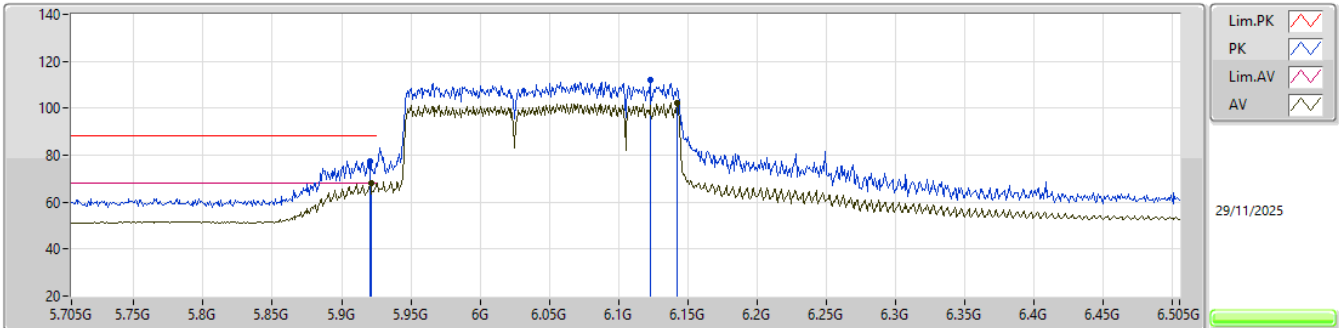EUT_Y_4TX
Setting 75
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9202G	77.63	88.20	-10.57	65.49	3	Vertical	355	1.93	-	34.14	8.16	30.16			
RMS	5.921G	68.08	68.20	-0.12	55.94	3	Vertical	355	1.93	-	34.14	8.16	30.16			
PK	6.1226G	111.92	Inf	-Inf	99.50	3	Vertical	355	1.93	-	34.55	8.05	30.18			
RMS	6.1426G	102.26	Inf	-Inf	89.82	3	Vertical	355	1.93	-	34.59	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX

6105MHz_TX

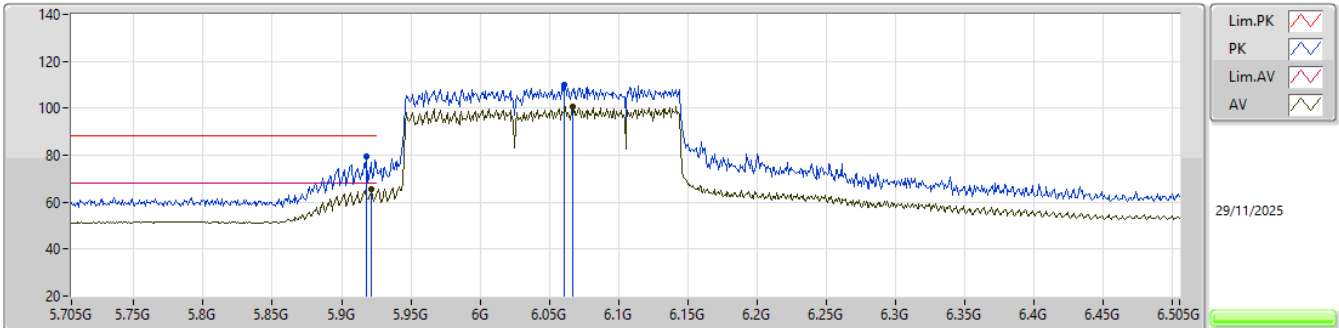


EUT_Y_4TX
Setting 75
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9178G	79.65	88.20	-8.55	67.51	3	Horizontal	4	1.40	-	34.14	8.16	30.16			
RMS	5.9218G	65.61	68.20	-2.59	53.47	3	Horizontal	4	1.40	-	34.14	8.16	30.16			
PK	6.061G	109.95	Inf	-Inf	97.59	3	Horizontal	4	1.40	-	34.42	8.09	30.15			
RMS	6.0666G	100.48	Inf	-Inf	88.13	3	Horizontal	4	1.40	-	34.43	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

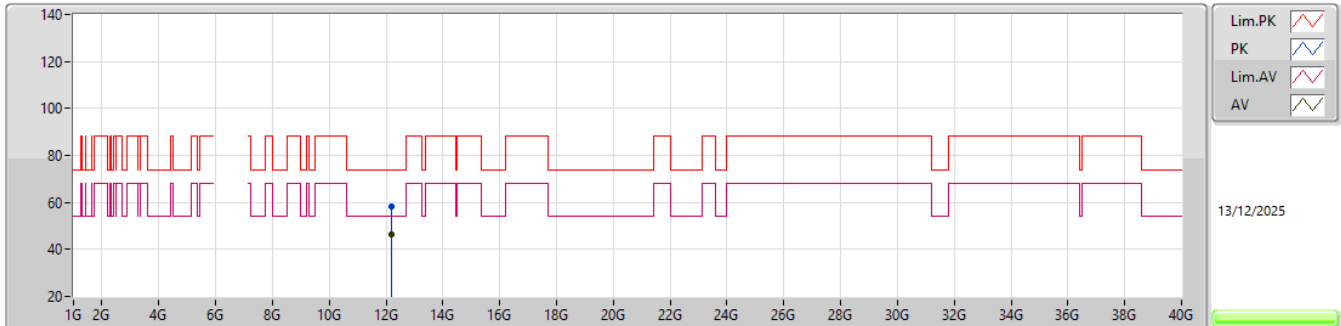EUT Y_4TX
Setting 75
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.20923G	58.13	74.00	-15.87	39.74	3	Vertical	272	1.80	-	39.10	12.92	33.63			
AV	12.20707G	46.21	54.00	-7.79	27.82	3	Vertical	272	1.80	-	39.10	12.92	33.63			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

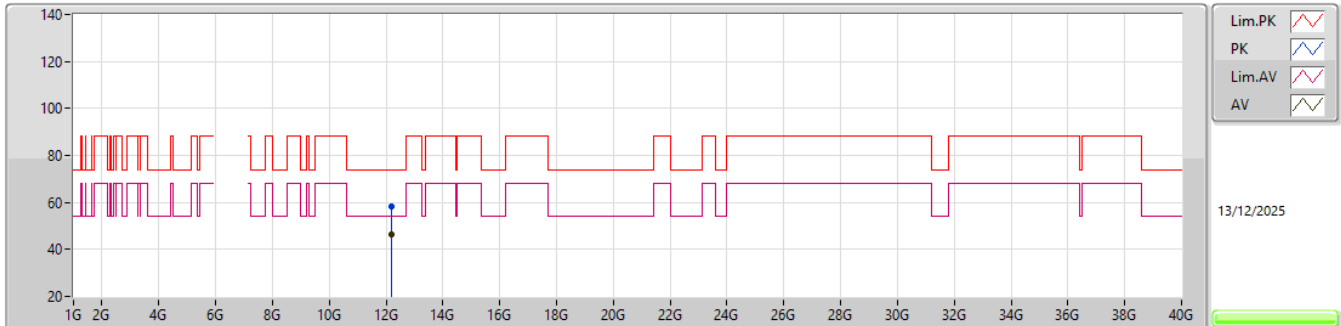EUT Y_4TX
Setting 75
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.20531G	58.52	74.00	-15.48	40.13	3	Horizontal	18	2.59	-	39.10	12.92	33.63			
AV	12.20525G	46.22	54.00	-7.78	27.83	3	Horizontal	18	2.59	-	39.10	12.92	33.63			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

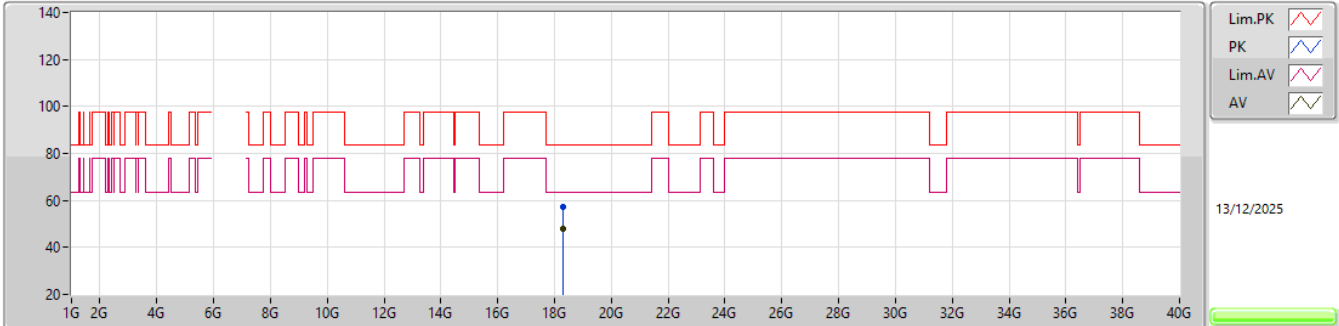EUT Y_4TX
Setting 75
05-X-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31601G	57.07	83.54	-26.47	52.31	1	Vertical	74	1.55	-	37.36	15.93	48.53			
AV	18.31996G	47.83	63.54	-15.71	43.05	1	Vertical	74	1.55	-	37.38	15.93	48.53			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

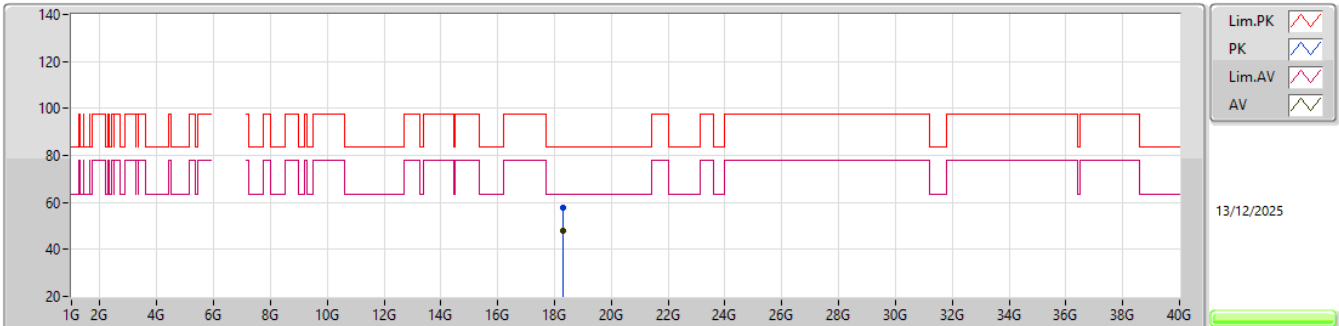EUT Y_4TX
Setting 75
05-X-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.31676G	57.57	83.54	-25.97	52.80	1	Horizontal	45	2.04	-	37.37	15.93	48.53			
AV	18.31765G	47.97	63.54	-15.57	43.20	1	Horizontal	45	2.04	-	37.37	15.93	48.53			

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

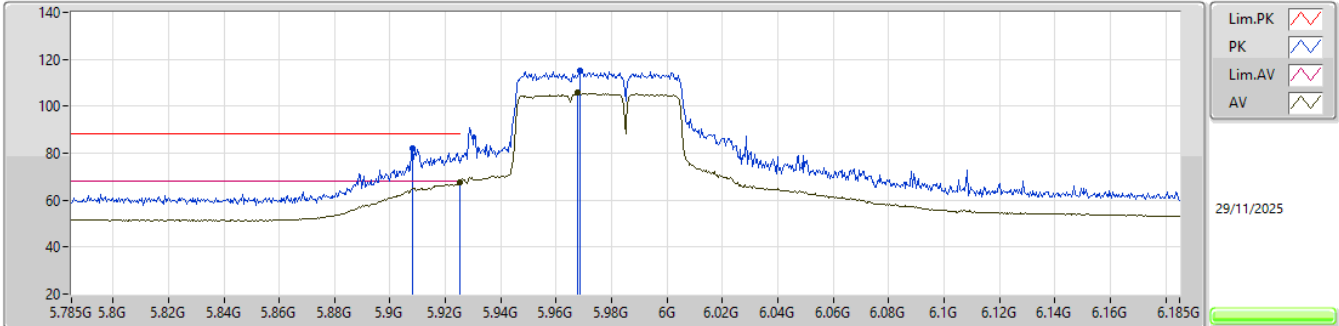


EUT_Y_4TX
Setting 74
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9082G	82.28	88.20	-5.92	70.16	3	Vertical	353	1.89	-	34.12	8.16	30.16			
RMS	5.925G	67.66	68.20	-0.54	55.52	3	Vertical	353	1.89	-	34.15	8.15	30.16			
PK	5.9686G	115.07	Inf	-Inf	102.84	3	Vertical	353	1.89	-	34.24	8.13	30.14			
RMS	5.9678G	105.69	Inf	-Inf	93.46	3	Vertical	353	1.89	-	34.24	8.13	30.14			

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

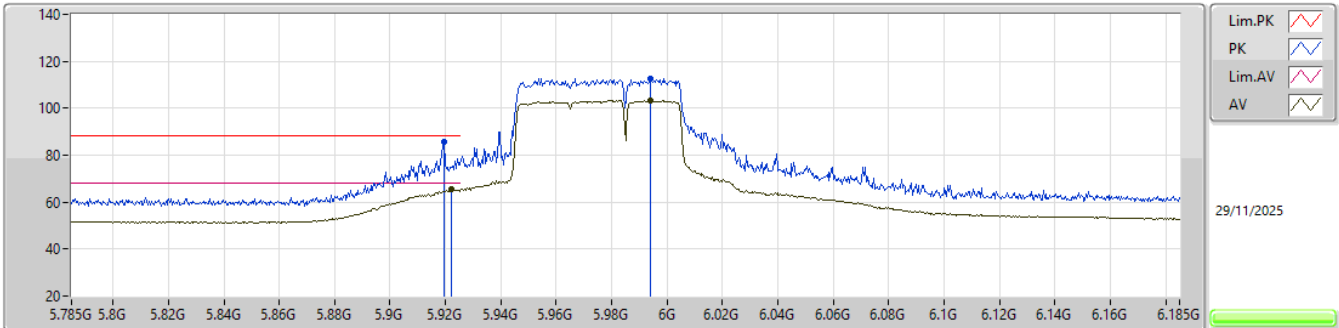


EUT_Y_4TX
Setting 74
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9194G	85.53	88.20	-2.67	73.39	3	Horizontal	3	1.10	-	34.14	8.16	30.16			
RMS	5.9222G	65.33	68.20	-2.87	53.19	3	Horizontal	3	1.10	-	34.14	8.16	30.16			
PK	5.9942G	112.55	Inf	-Inf	100.27	3	Horizontal	3	1.10	-	34.29	8.12	30.13			
RMS	5.9938G	103.35	Inf	-Inf	91.07	3	Horizontal	3	1.10	-	34.29	8.12	30.13			

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484+242 MRU 6_4TX

6025MHz_TX

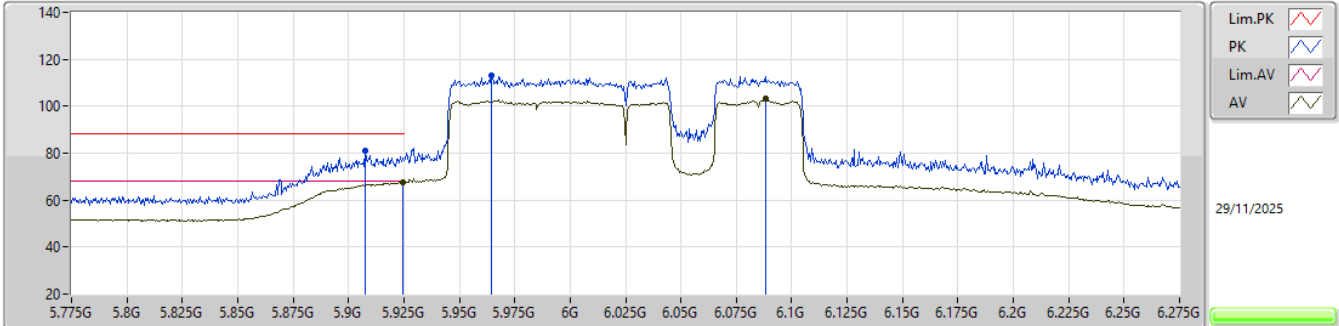


EUT_Y_4TX
Setting 74
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9075G	81.12	88.20	-7.08	69.00	3	Vertical	357	1.90	-	34.12	8.16	30.16				
RMS	5.9245G	67.47	68.20	-0.73	55.33	3	Vertical	357	1.90	-	34.15	8.15	30.16				
PK	5.9645G	113.25	Inf	-Inf	101.02	3	Vertical	357	1.90	-	34.23	8.14	30.14				
RMS	6.088G	103.15	Inf	-Inf	90.77	3	Vertical	357	1.90	-	34.48	8.07	30.17				

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484+242 MRU 6_4TX

6025MHz_TX

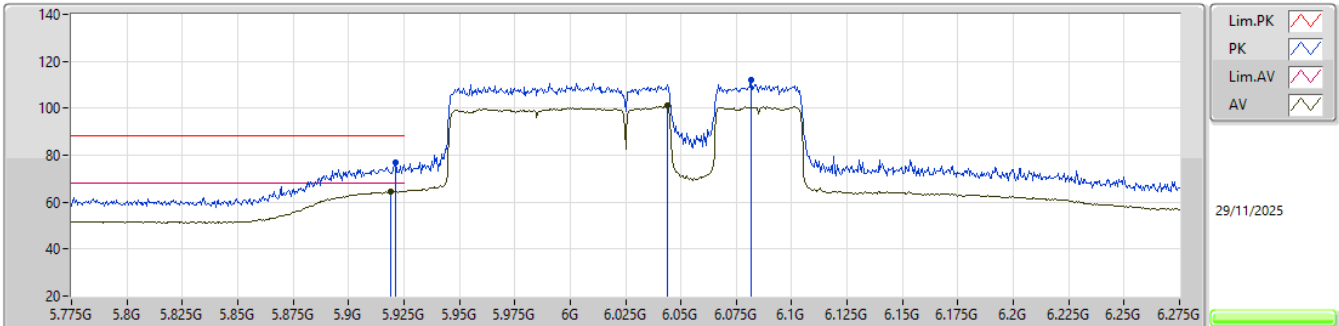


EUT_Y_4TX
Setting 74
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.921G	77.02	88.20	-11.18	64.88	3	Horizontal	5	1.20	-	34.14	8.16	30.16
RMS	5.919G	64.73	68.20	-3.47	52.59	3	Horizontal	5	1.20	-	34.14	8.16	30.16
PK	6.0815G	111.97	Inf	-Inf	99.59	3	Horizontal	5	1.20	-	34.46	8.08	30.16
RMS	6.044G	101.00	Inf	-Inf	88.66	3	Horizontal	5	1.20	-	34.39	8.10	30.15

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU 4_4TX

6025MHz_TX

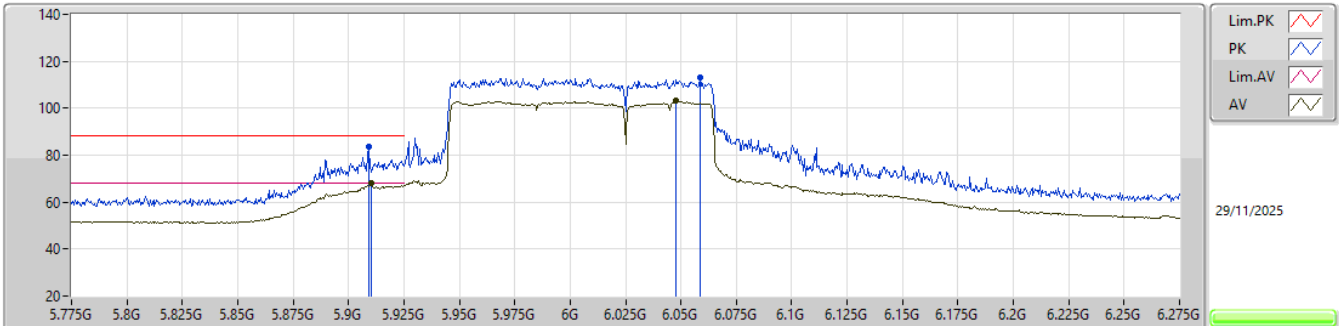


EUT_Y_4TX
Setting 73
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.909G	83.49	88.20	-4.71	71.37	3	Vertical	358	1.80	-	34.12	8.16	30.16			
RMS	5.91G	67.87	68.20	-0.33	55.75	3	Vertical	358	1.80	-	34.12	8.16	30.16			
PK	6.0585G	113.28	Inf	-Inf	100.92	3	Vertical	358	1.80	-	34.42	8.09	30.15			
RMS	6.048G	103.29	Inf	-Inf	90.95	3	Vertical	358	1.80	-	34.40	8.09	30.15			

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU 4_4TX

6025MHz_TX

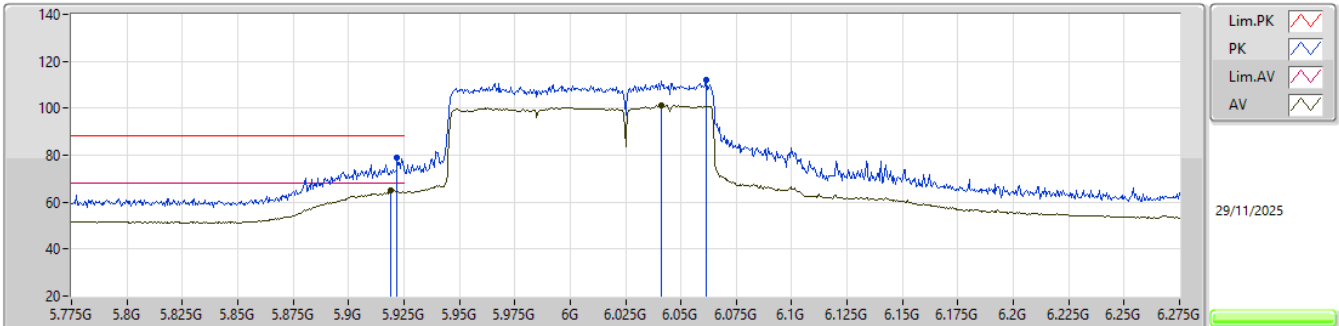


EUT_Y_4TX
Setting 73
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.922G	78.76	88.20	-9.44	66.62	3	Horizontal	2	1.27	-	34.14	8.16	30.16			
RMS	5.919G	64.95	68.20	-3.25	52.81	3	Horizontal	2	1.27	-	34.14	8.16	30.16			
PK	6.0615G	112.19	Inf	-Inf	99.83	3	Horizontal	2	1.27	-	34.42	8.09	30.15			
RMS	6.041G	101.16	Inf	-Inf	88.83	3	Horizontal	2	1.27	-	34.38	8.10	30.15			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU 8_4TX

6105MHz_TX

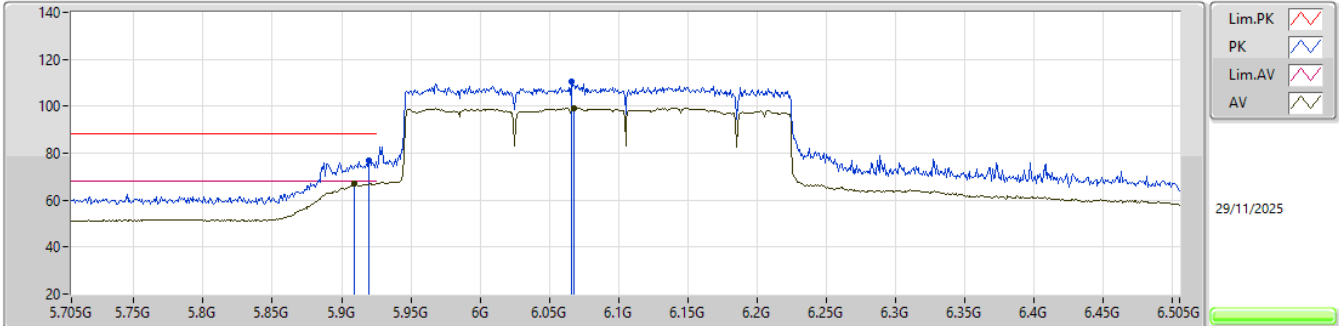


EUT_Y_4TX
Setting 78
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9194G	77.08	88.20	-11.12	64.94	3	Vertical	355	1.89	-	34.14	8.16	30.16			
RMS	5.909G	67.30	68.20	-0.90	55.18	3	Vertical	355	1.89	-	34.12	8.16	30.16			
PK	6.0658G	110.57	Inf	-Inf	98.22	3	Vertical	355	1.89	-	34.43	8.08	30.16			
RMS	6.0674G	99.35	Inf	-Inf	87.00	3	Vertical	355	1.89	-	34.43	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU 8_4TX

6105MHz_TX

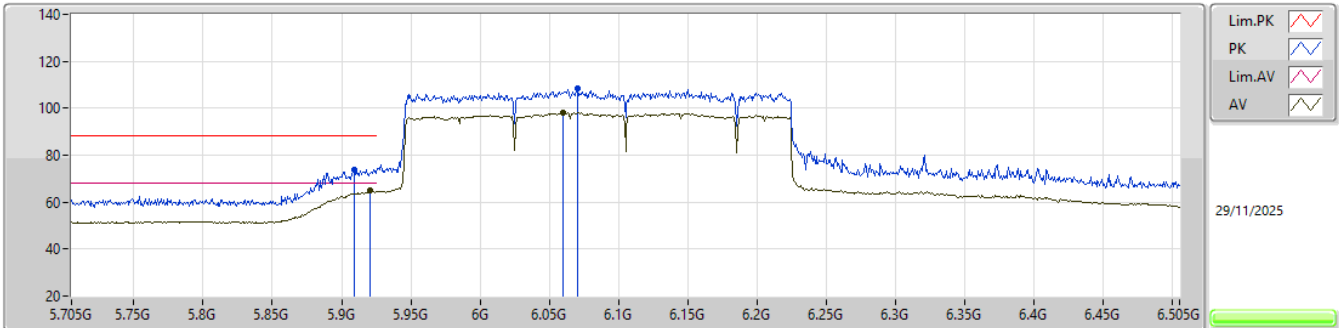


EUT_Y_4TX
Setting 78
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.909G	73.79	88.20	-14.41	61.67	3	Horizontal	1	1.10	-	34.12	8.16	30.16			
RMS	5.9202G	64.96	68.20	-3.24	52.82	3	Horizontal	1	1.10	-	34.14	8.16	30.16			
PK	6.0706G	108.36	Inf	-Inf	96.00	3	Horizontal	1	1.10	-	34.44	8.08	30.16			
RMS	6.0602G	98.33	Inf	-Inf	85.97	3	Horizontal	1	1.10	-	34.42	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

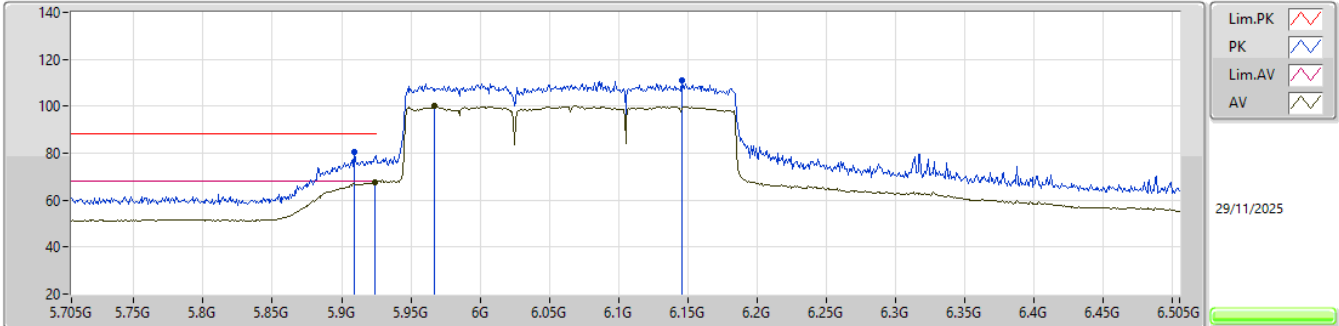


EUT_Y_4TX
Setting 78
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.909G	80.60	88.20	-7.60	68.48	3	Vertical	352	1.80	-	34.12	8.16	30.16			
RMS	5.9242G	67.44	68.20	-0.76	55.30	3	Vertical	352	1.80	-	34.15	8.15	30.16			
PK	6.1458G	111.10	Inf	-Inf	98.66	3	Vertical	352	1.80	-	34.59	8.04	30.19			
RMS	5.9674G	100.14	Inf	-Inf	87.92	3	Vertical	352	1.80	-	34.23	8.13	30.14			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX


6105MHz_TX

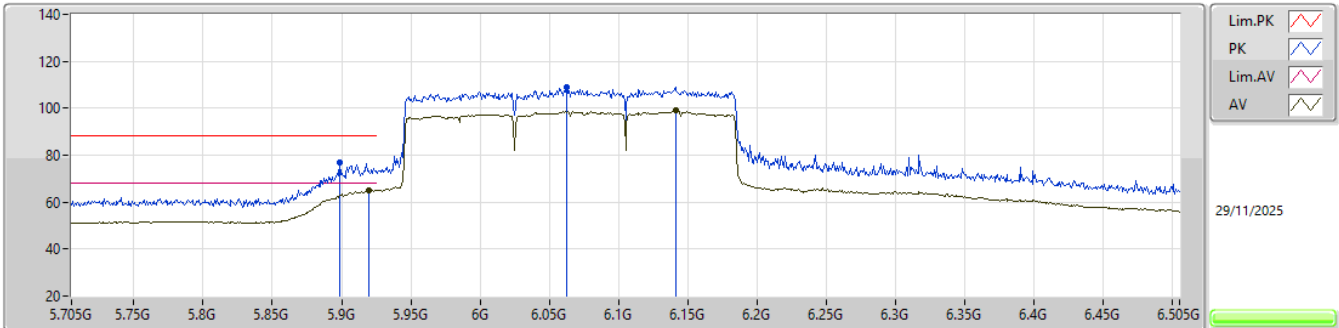EUT_Y_4TX
Setting 78
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8986G	76.65	88.20	-11.55	64.56	3	Horizontal	0	1.30	-	34.09	8.17	30.17			
RMS	5.9194G	64.81	68.20	-3.39	52.67	3	Horizontal	0	1.30	-	34.14	8.16	30.16			
PK	6.0626G	108.97	Inf	-Inf	96.61	3	Horizontal	0	1.30	-	34.43	8.09	30.16			
RMS	6.141G	98.89	Inf	-Inf	86.46	3	Horizontal	0	1.30	-	34.58	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX

6105MHz_TX

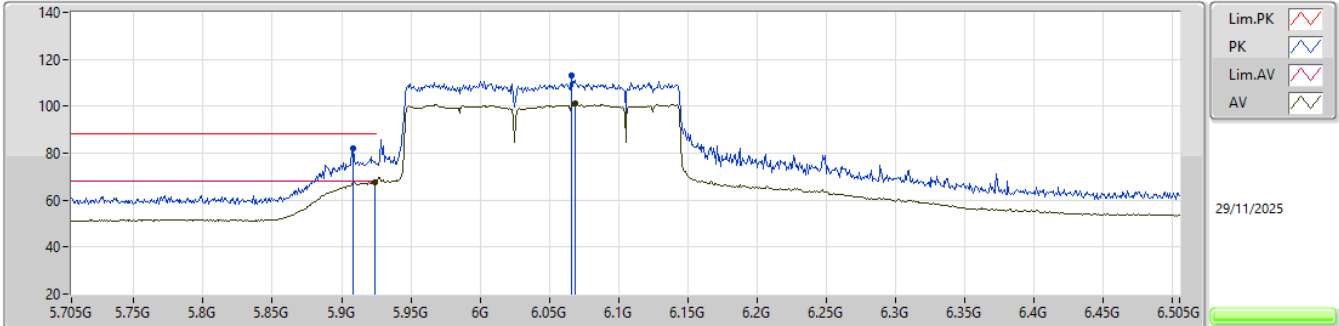


EUT_Y_4TX
Setting 77
02-D-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9082G	82.06	88.20	-6.14	69.94	3	Vertical	360	1.82	-	34.12	8.16	30.16			
RMS	5.9242G	67.81	68.20	-0.39	55.67	3	Vertical	360	1.82	-	34.15	8.15	30.16			
PK	6.0658G	113.02	Inf	-Inf	100.67	3	Vertical	360	1.82	-	34.43	8.08	30.16			
RMS	6.069G	101.05	Inf	-Inf	88.69	3	Vertical	360	1.82	-	34.44	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX

6105MHz_TX

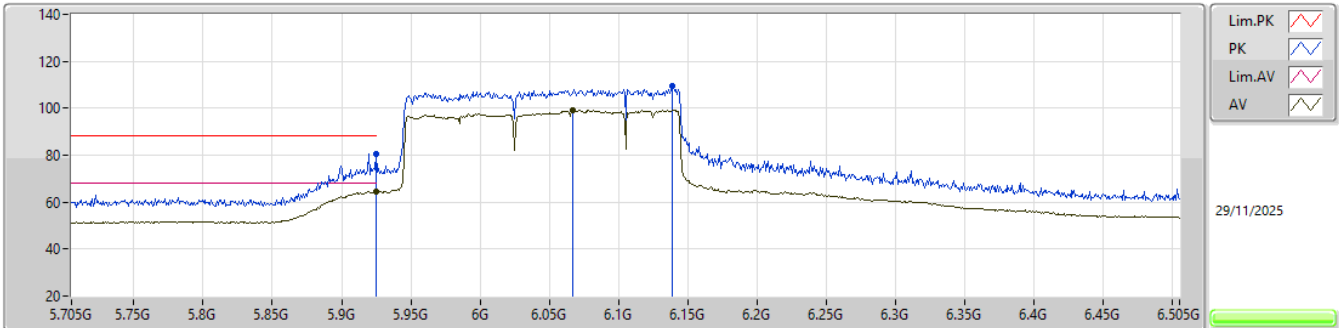

EUT_Y_4TX
Setting 77
02-D-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	80.48	88.20	-7.72	68.34	3	Horizontal	5	1.62	-	34.15	8.15	30.16			
RMS	5.925G	64.58	68.20	-3.62	52.44	3	Horizontal	5	1.62	-	34.15	8.15	30.16			
PK	6.1386G	109.30	Inf	-Inf	96.87	3	Horizontal	5	1.62	-	34.58	8.04	30.19			
RMS	6.0666G	99.28	Inf	-Inf	86.93	3	Horizontal	5	1.62	-	34.43	8.08	30.16			




Test Mode: Mode 2

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU 4_4TX	Pass	RMS	5.9235G	68.16	68.20	-0.04	3	Vertical	1	1.88	-

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX


5985MHz_TX

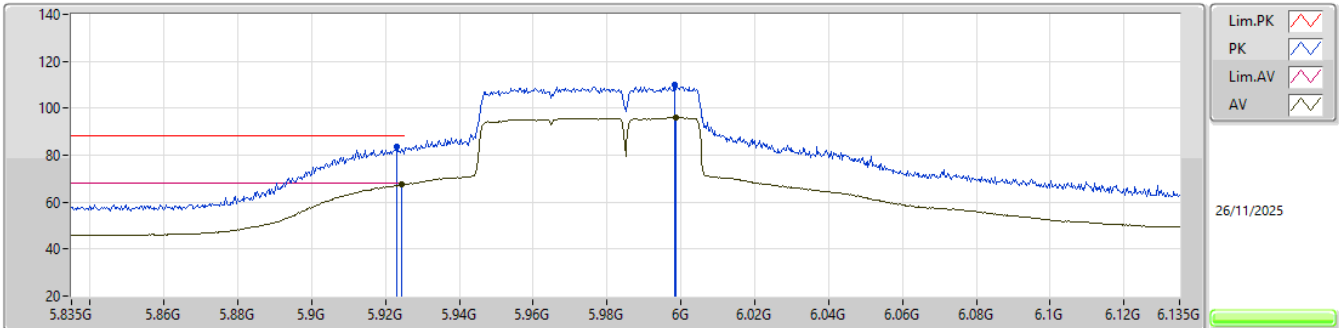EUT_Y_1TX
Setting 86
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9229G	83.39	88.20	-4.81	71.25	3	Vertical	349	1.58	-	34.15	8.15	30.16			
RMS	5.9244G	67.47	68.20	-0.73	55.33	3	Vertical	349	1.58	-	34.15	8.15	30.16			
PK	5.9982G	109.91	Inf	-Inf	97.62	3	Vertical	349	1.58	-	34.30	8.12	30.13			
RMS	5.9985G	96.01	Inf	-Inf	83.72	3	Vertical	349	1.58	-	34.30	8.12	30.13			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX

5985MHz_TX

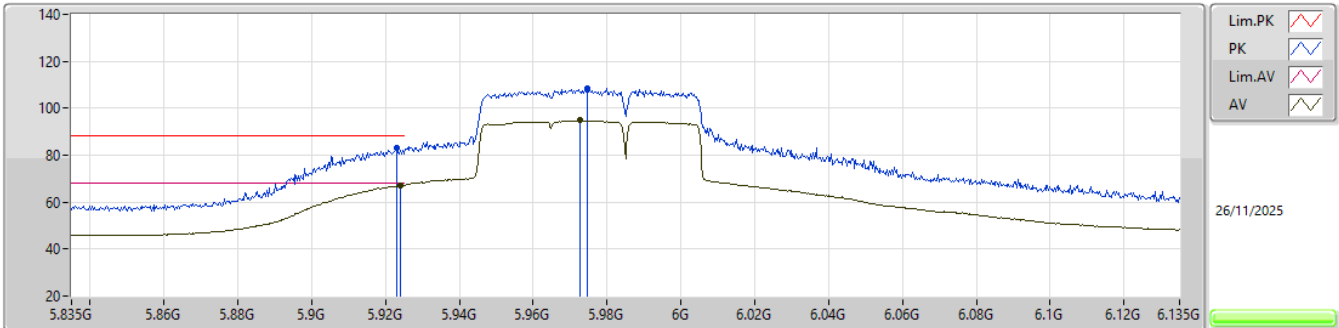


EUT_Y_1TX
Setting 86
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9229G	83.26	88.20	-4.94	71.12	3	Horizontal	338	1.85	-	34.15	8.15	30.16			
RMS	5.9241G	67.27	68.20	-0.93	55.13	3	Horizontal	338	1.85	-	34.15	8.15	30.16			
PK	5.9745G	108.55	Inf	-Inf	96.31	3	Horizontal	338	1.85	-	34.25	8.13	30.14			
RMS	5.9727G	94.78	Inf	-Inf	82.54	3	Horizontal	338	1.85	-	34.25	8.13	30.14			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX

6025MHz_TX

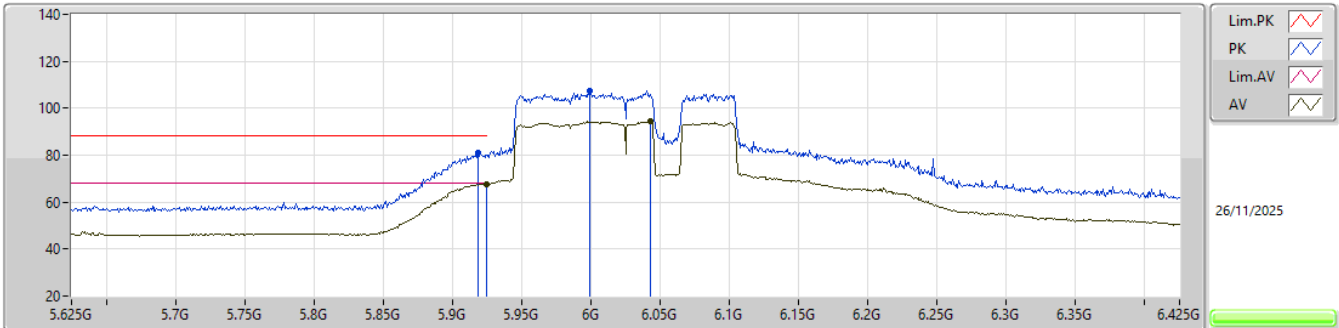


EUT_Y_1TX
Setting 89
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9186G	81.28	88.20	-6.92	69.14	3	Vertical	347	1.56	-	34.14	8.16	30.16			
RMS	5.925G	67.80	68.20	-0.40	55.66	3	Vertical	347	1.56	-	34.15	8.15	30.16			
PK	5.9994G	107.52	Inf	-Inf	95.23	3	Vertical	347	1.56	-	34.30	8.12	30.13			
RMS	6.0434G	94.56	Inf	-Inf	82.22	3	Vertical	347	1.56	-	34.39	8.10	30.15			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX

6025MHz_TX

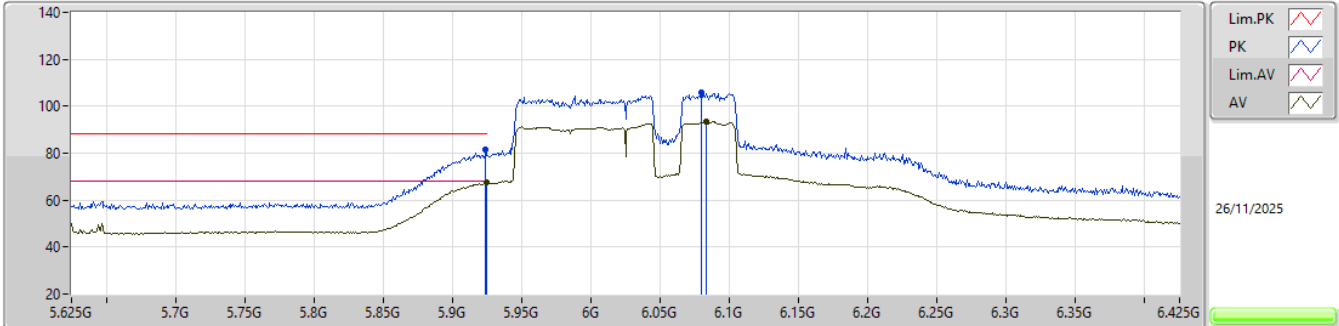


EUT Y_1TX
Setting 89
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9242G	81.31	88.20	-6.89	69.17	3	Horizontal	349	1.78	-	34.15	8.15	30.16			
RMS	5.925G	67.38	68.20	-0.82	55.24	3	Horizontal	349	1.78	-	34.15	8.15	30.16			
PK	6.0794G	105.66	Inf	-Inf	93.28	3	Horizontal	349	1.78	-	34.46	8.08	30.16			
RMS	6.0834G	93.41	Inf	-Inf	81.03	3	Horizontal	349	1.78	-	34.47	8.07	30.16			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX

6025MHz_TX

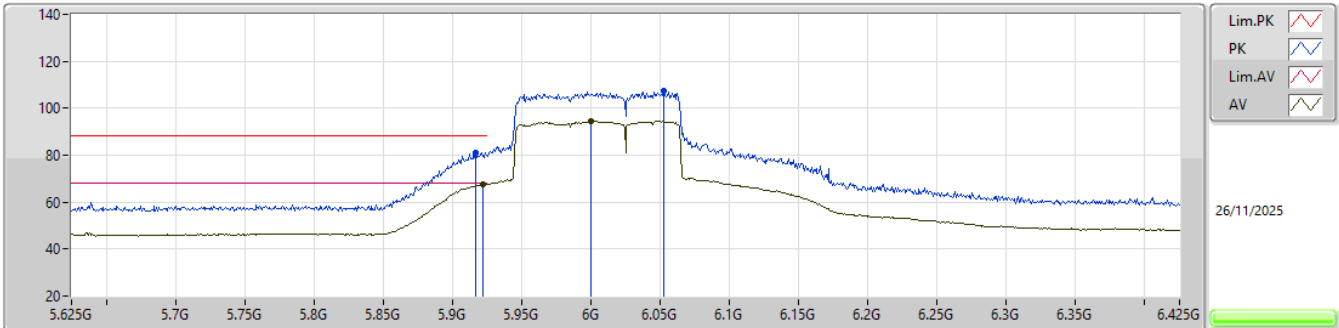


EUT_Y_1TX
Setting 88
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.917G	81.10	88.20	-7.10	68.97	3	Vertical	346	1.59	-	34.13	8.16	30.16			
RMS	5.9218G	67.61	68.20	-0.59	55.47	3	Vertical	346	1.59	-	34.14	8.16	30.16			
PK	6.0522G	107.17	Inf	-Inf	94.83	3	Vertical	346	1.59	-	34.40	8.09	30.15			
RMS	6.0002G	94.55	Inf	-Inf	82.26	3	Vertical	346	1.59	-	34.30	8.12	30.13			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX

6025MHz_TX

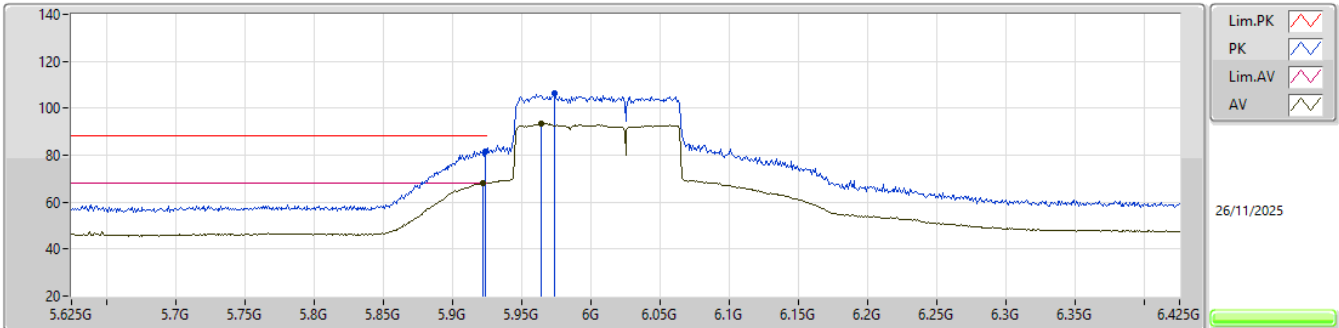


EUT_Y_1TX
Setting 88
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9234G	81.56	88.20	-6.64	69.42	3	Horizontal	340	1.85	-	34.15	8.15	30.16			
RMS	5.9218G	68.16	68.20	-0.04	56.02	3	Horizontal	340	1.85	-	34.14	8.16	30.16			
PK	5.9738G	106.40	Inf	-Inf	94.16	3	Horizontal	340	1.85	-	34.25	8.13	30.14			
RMS	5.9642G	93.56	Inf	-Inf	81.33	3	Horizontal	340	1.85	-	34.23	8.14	30.14			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX

6105MHz_TX

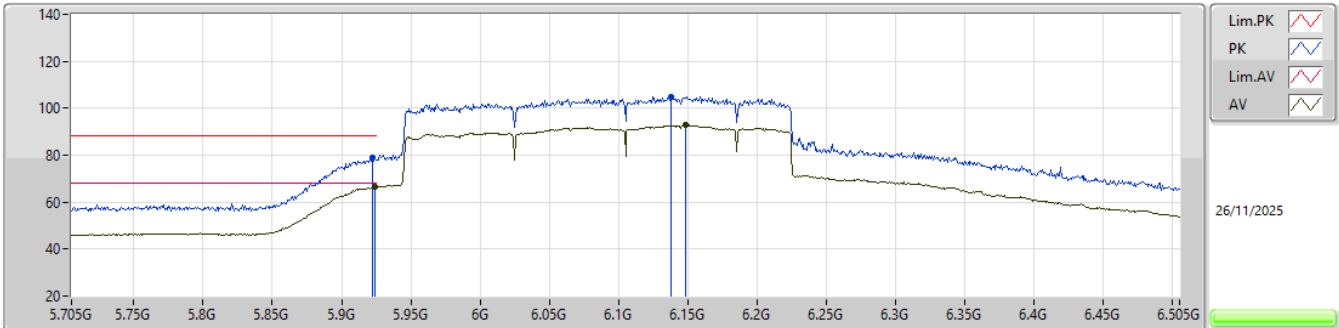


EUT_Y_1TX
Setting 99
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9226G	79.01	88.20	-9.19	66.87	3	Vertical	341	2.03	-	34.15	8.15	30.16			
RMS	5.9242G	66.47	68.20	-1.73	54.33	3	Vertical	341	2.03	-	34.15	8.15	30.16			
PK	6.1378G	105.02	Inf	-Inf	92.59	3	Vertical	341	2.03	-	34.58	8.04	30.19			
RMS	6.1482G	92.78	Inf	-Inf	80.33	3	Vertical	341	2.03	-	34.60	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX


6105MHz_TX

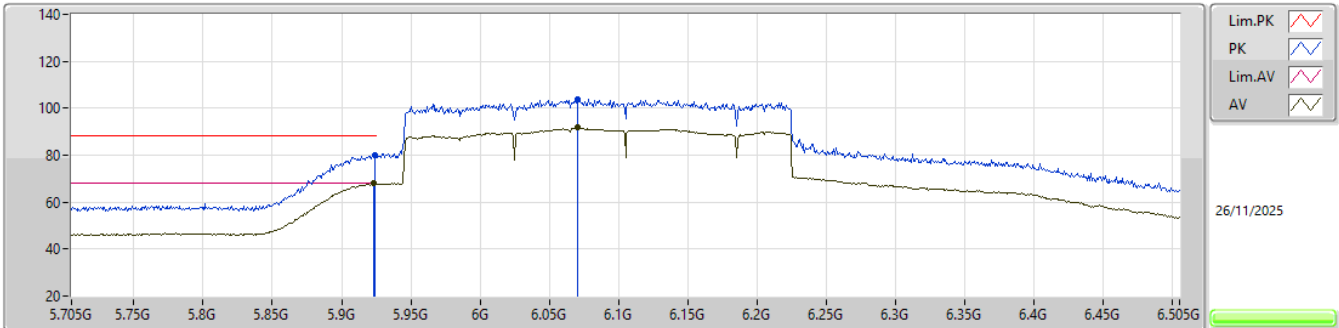EUT_Y_1TX
Setting 99
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9242G	79.89	88.20	-8.31	67.75	3	Horizontal	350	1.64	-	34.15	8.15	30.16			
RMS	5.9234G	67.87	68.20	-0.33	55.73	3	Horizontal	350	1.64	-	34.15	8.15	30.16			
PK	6.0706G	103.87	Inf	-Inf	91.51	3	Horizontal	350	1.64	-	34.44	8.08	30.16			
RMS	6.0706G	91.77	Inf	-Inf	79.41	3	Horizontal	350	1.64	-	34.44	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX

6105MHz_TX

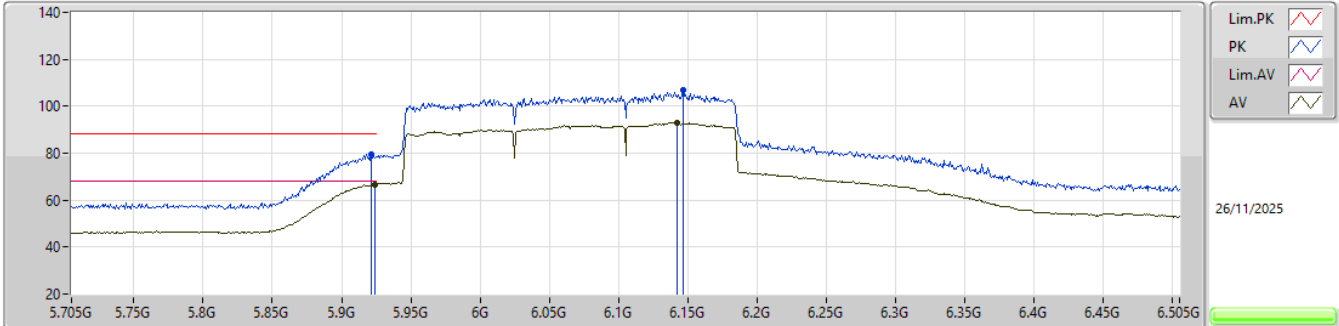


EUT_Y_1TX
Setting 98
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.921G	79.51	88.20	-8.69	67.37	3	Vertical	341	2.12	-	34.14	8.16	30.16			
RMS	5.9242G	66.70	68.20	-1.50	54.56	3	Vertical	341	2.12	-	34.15	8.15	30.16			
PK	6.1466G	106.74	Inf	-Inf	94.30	3	Vertical	341	2.12	-	34.59	8.04	30.19			
RMS	6.1426G	93.07	Inf	-Inf	80.63	3	Vertical	341	2.12	-	34.59	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX

6105MHz_TX

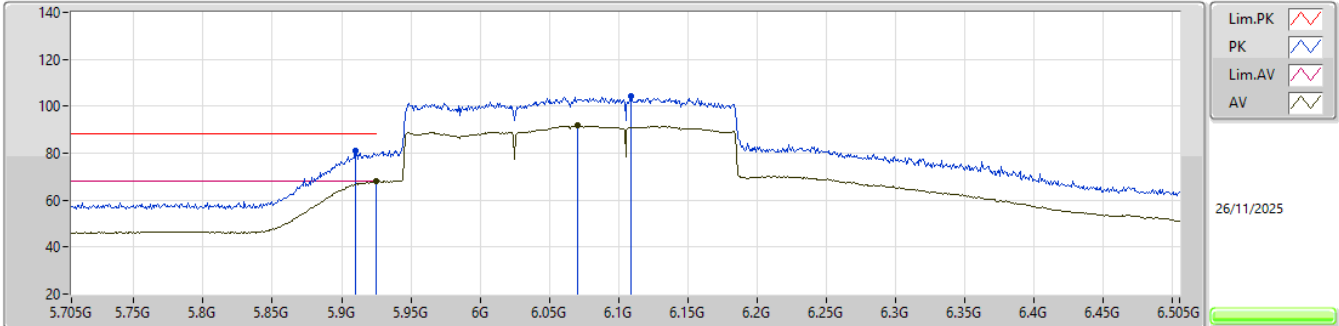


EUT_Y_1TX
Setting 98
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9098G	80.83	88.20	-7.37	68.71	3	Horizontal	348	1.67	-	34.12	8.16	30.16			
RMS	5.925G	68.04	68.20	-0.16	55.90	3	Horizontal	348	1.67	-	34.15	8.15	30.16			
PK	6.109G	104.55	Inf	-Inf	92.14	3	Horizontal	348	1.67	-	34.52	8.06	30.17			
RMS	6.0706G	91.69	Inf	-Inf	79.33	3	Horizontal	348	1.67	-	34.44	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX

6105MHz_TX

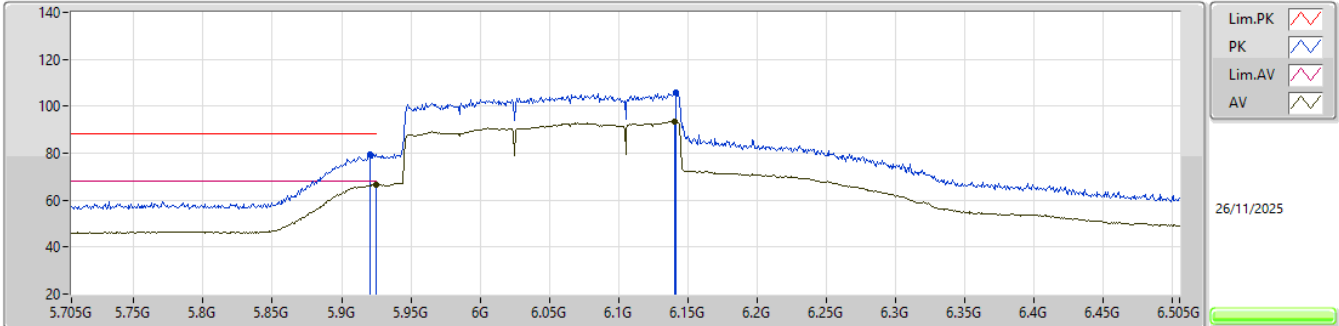


EUT_Y_1TX
Setting 97
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9202G	79.74	88.20	-8.46	67.60	3	Vertical	340	2.00	-	34.14	8.16	30.16			
RMS	5.925G	66.46	68.20	-1.74	54.32	3	Vertical	340	2.00	-	34.15	8.15	30.16			
PK	6.1418G	105.66	Inf	-Inf	93.23	3	Vertical	340	2.00	-	34.58	8.04	30.19			
RMS	6.1402G	93.31	Inf	-Inf	80.88	3	Vertical	340	2.00	-	34.58	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX

6105MHz_TX

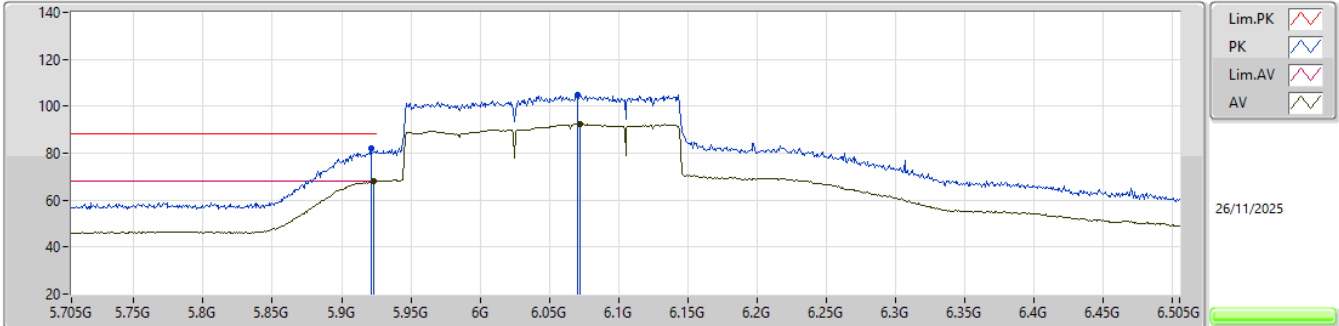


EUT_Y_1TX
Setting 97
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.921G	81.82	88.20	-6.38	69.68	3	Horizontal	349	1.65	-	34.14	8.16	30.16			
RMS	5.9234G	67.97	68.20	-0.23	55.83	3	Horizontal	349	1.65	-	34.15	8.15	30.16			
PK	6.0706G	104.97	Inf	-Inf	92.61	3	Horizontal	349	1.65	-	34.44	8.08	30.16			
RMS	6.0722G	92.40	Inf	-Inf	80.04	3	Horizontal	349	1.65	-	34.44	8.08	30.16			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX

5985MHz_TX

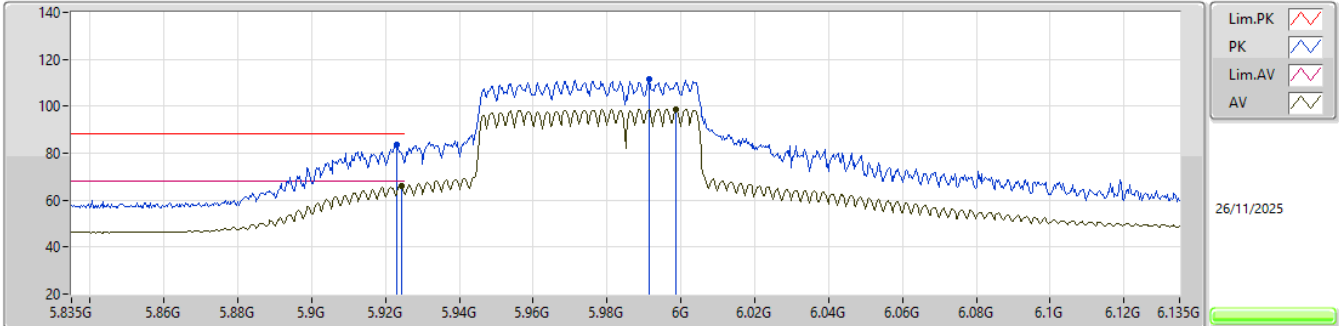


EUT_Y_2TX
Setting 97
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9229G	83.53	88.20	-4.67	71.39	3	Vertical	2	1.80	-	34.15	8.15	30.16			
RMS	5.9244G	66.11	68.20	-2.09	53.97	3	Vertical	2	1.80	-	34.15	8.15	30.16			
PK	5.9913G	111.32	Inf	-Inf	99.05	3	Vertical	2	1.80	-	34.28	8.12	30.13			
RMS	5.9988G	98.66	Inf	-Inf	86.37	3	Vertical	2	1.80	-	34.30	8.12	30.13			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX

5985MHz_TX

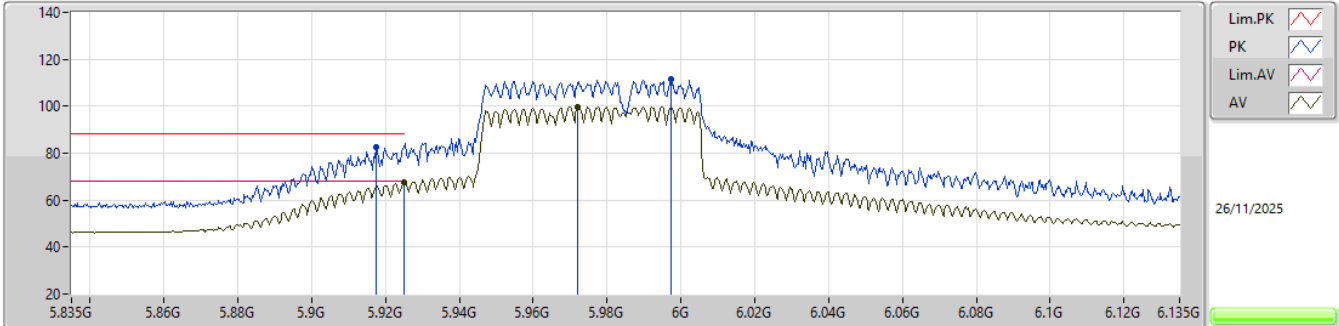


EUT_Y_2TX
Setting 97
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9175G	82.66	88.20	-5.54	70.52	3	Horizontal	341	1.86	-	34.14	8.16	30.16			
RMS	5.925G	67.56	68.20	-0.64	55.42	3	Horizontal	341	1.86	-	34.15	8.15	30.16			
PK	5.9973G	111.41	Inf	-Inf	99.13	3	Horizontal	341	1.86	-	34.29	8.12	30.13			
RMS	5.9721G	99.65	Inf	-Inf	87.42	3	Horizontal	341	1.86	-	34.24	8.13	30.14			

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX

6025MHz_TX

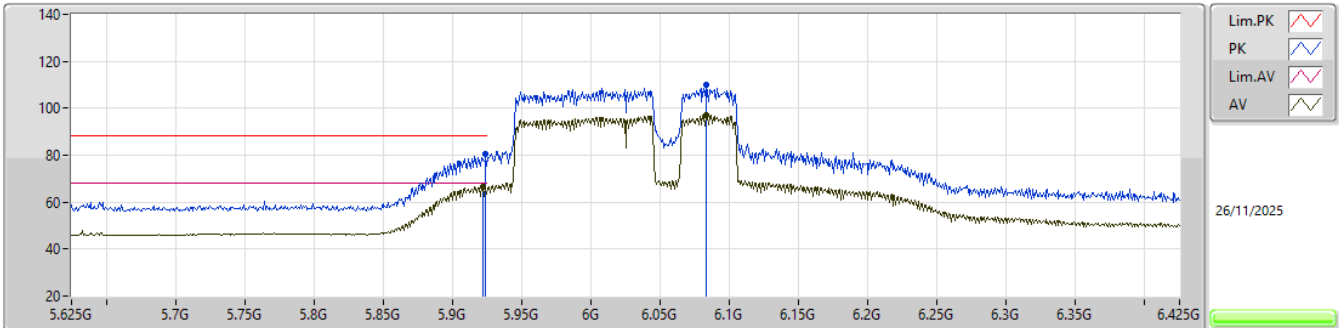


EUT_Y_2TX
Setting 84
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9242G	80.30	88.20	-7.90	68.16	3	Vertical	1	1.80	-	34.15	8.15	30.16			
RMS	5.9218G	66.69	68.20	-1.51	54.55	3	Vertical	1	1.80	-	34.14	8.16	30.16			
PK	6.0834G	109.82	Inf	-Inf	97.44	3	Vertical	1	1.80	-	34.47	8.07	30.16			
RMS	6.0834G	97.11	Inf	-Inf	84.73	3	Vertical	1	1.80	-	34.47	8.07	30.16			

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX


6025MHz_TX

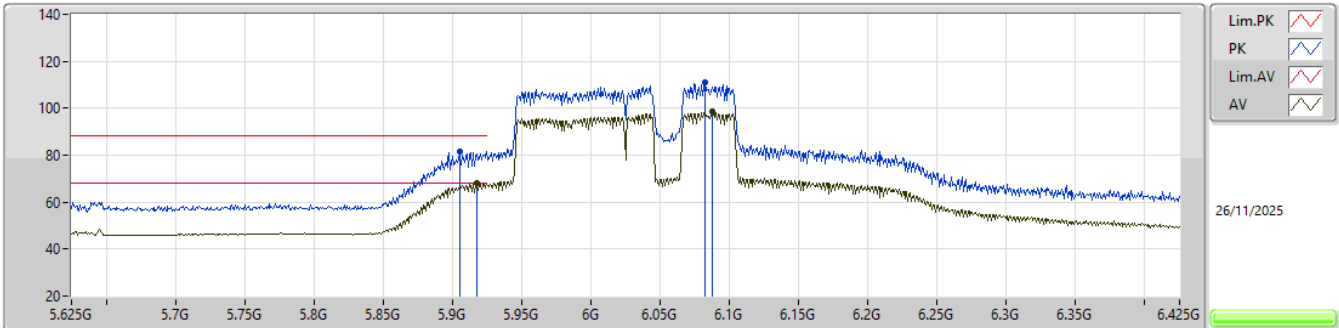EUT_Y_2TX
Setting 84
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.905G	81.63	88.20	-6.57	69.52	3	Horizontal	348	1.80	-	34.11	8.16	30.16			
RMS	5.9178G	67.87	68.20	-0.33	55.73	3	Horizontal	348	1.80	-	34.14	8.16	30.16			
PK	6.0826G	110.93	Inf	-Inf	98.55	3	Horizontal	348	1.80	-	34.47	8.07	30.16			
RMS	6.0874G	98.63	Inf	-Inf	86.25	3	Horizontal	348	1.80	-	34.47	8.07	30.16			

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX


6025MHz_TX

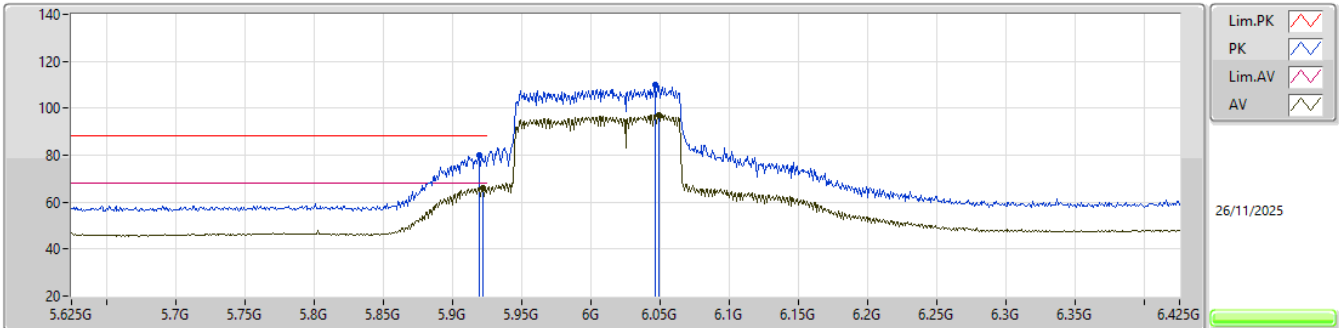EUT_Y_2TX
Setting 82
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9194G	80.19	88.20	-8.01	68.05	3	Vertical	3	1.90	-	34.14	8.16	30.16			
RMS	5.9218G	66.21	68.20	-1.99	54.07	3	Vertical	3	1.90	-	34.14	8.16	30.16			
PK	6.0466G	110.08	Inf	-Inf	97.75	3	Vertical	3	1.90	-	34.39	8.09	30.15			
RMS	6.049G	97.32	Inf	-Inf	84.98	3	Vertical	3	1.90	-	34.40	8.09	30.15			

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX

6025MHz_TX

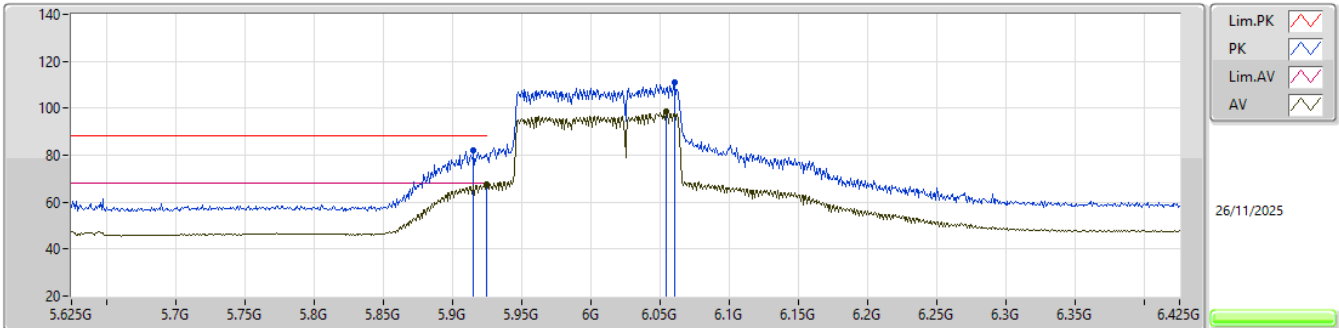


EUT_Y_2TX
Setting 82
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9154G	82.07	88.20	-6.13	69.94	3	Horizontal	344	1.80	-	34.13	8.16	30.16			
RMS	5.925G	67.60	68.20	-0.60	55.46	3	Horizontal	344	1.80	-	34.15	8.15	30.16			
PK	6.0602G	110.81	Inf	-Inf	98.45	3	Horizontal	344	1.80	-	34.42	8.09	30.15			
RMS	6.0546G	98.43	Inf	-Inf	86.08	3	Horizontal	344	1.80	-	34.41	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX

6105MHz_TX

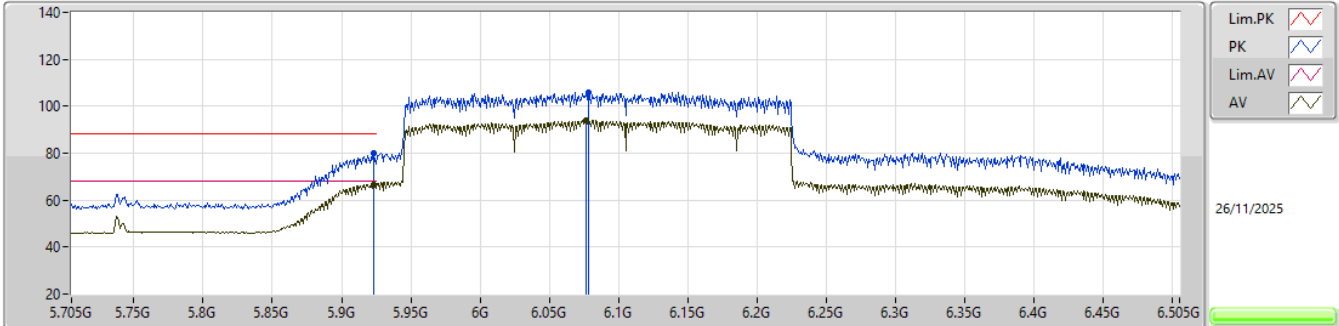


EUT_Y_2TX
Setting 93
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9234G	79.78	88.20	-8.42	67.64	3	Vertical	360	1.65	-	34.15	8.15	30.16			
RMS	5.9234G	66.77	68.20	-1.43	54.63	3	Vertical	360	1.65	-	34.15	8.15	30.16			
PK	6.0786G	106.07	Inf	-Inf	93.69	3	Vertical	360	1.65	-	34.46	8.08	30.16			
RMS	6.0762G	94.15	Inf	-Inf	81.78	3	Vertical	360	1.65	-	34.45	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX

6105MHz_TX

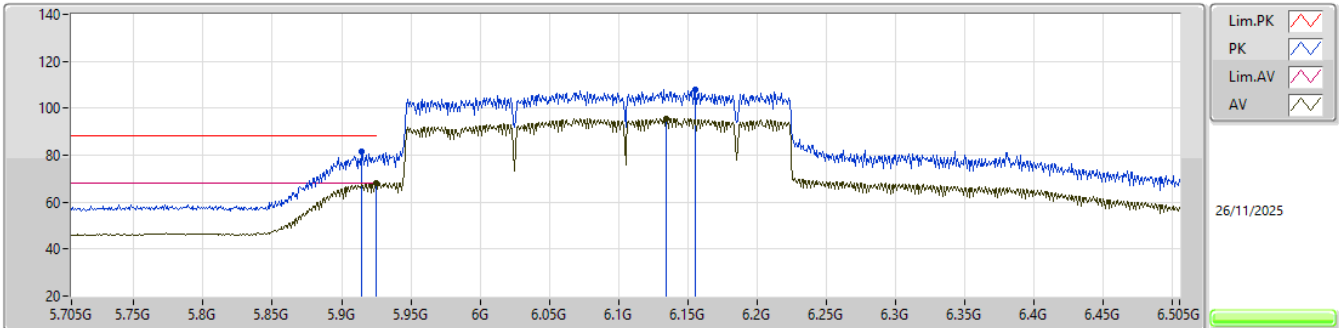


EUT_Y_2TX
Setting 93
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9146G	81.53	88.20	-6.67	69.40	3	Horizontal	350	1.81	-	34.13	8.16	30.16
RMS	5.925G	67.89	68.20	-0.31	55.75	3	Horizontal	350	1.81	-	34.15	8.15	30.16
PK	6.1554G	108.05	Inf	-Inf	95.61	3	Horizontal	350	1.81	-	34.60	8.03	30.19
RMS	6.1346G	95.66	Inf	-Inf	83.22	3	Horizontal	350	1.81	-	34.57	8.05	30.18

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX

6105MHz_TX

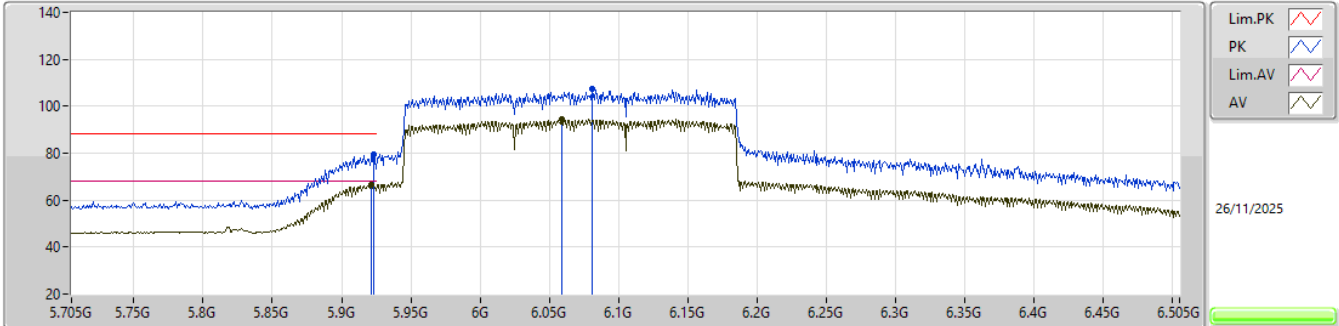


EUT_Y_2TX
Setting 92
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9234G	79.25	88.20	-8.95	67.11	3	Vertical	1	1.80	-	34.15	8.15	30.16			
RMS	5.921G	66.38	68.20	-1.82	54.24	3	Vertical	1	1.80	-	34.14	8.16	30.16			
PK	6.081G	107.52	Inf	-Inf	95.14	3	Vertical	1	1.80	-	34.46	8.08	30.16			
RMS	6.0586G	94.41	Inf	-Inf	82.05	3	Vertical	1	1.80	-	34.42	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX

6105MHz_TX

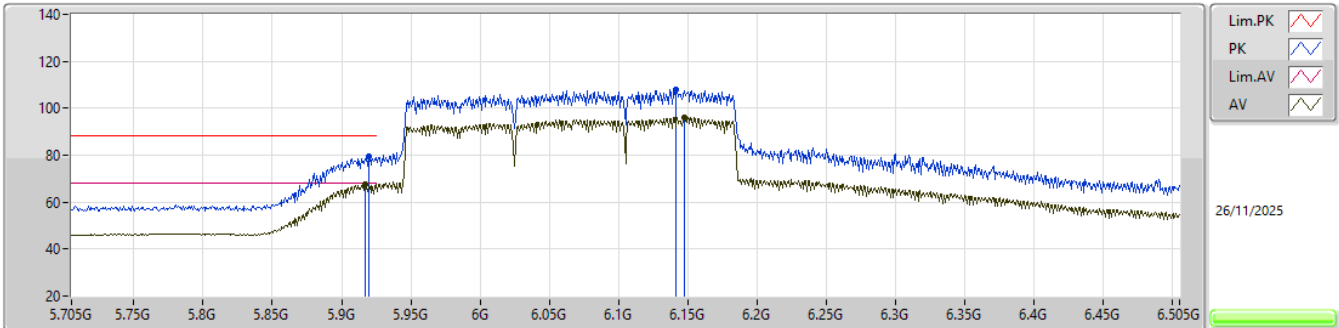


EUT_Y_2TX
Setting 92
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9194G	79.40	88.20	-8.80	67.26	3	Horizontal	347	1.92	-	34.14	8.16	30.16			
RMS	5.917G	67.73	68.20	-0.47	55.60	3	Horizontal	347	1.92	-	34.13	8.16	30.16			
PK	6.1418G	107.94	Inf	-Inf	95.51	3	Horizontal	347	1.92	-	34.58	8.04	30.19			
RMS	6.1474G	96.22	Inf	-Inf	83.78	3	Horizontal	347	1.92	-	34.59	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX

6105MHz_TX

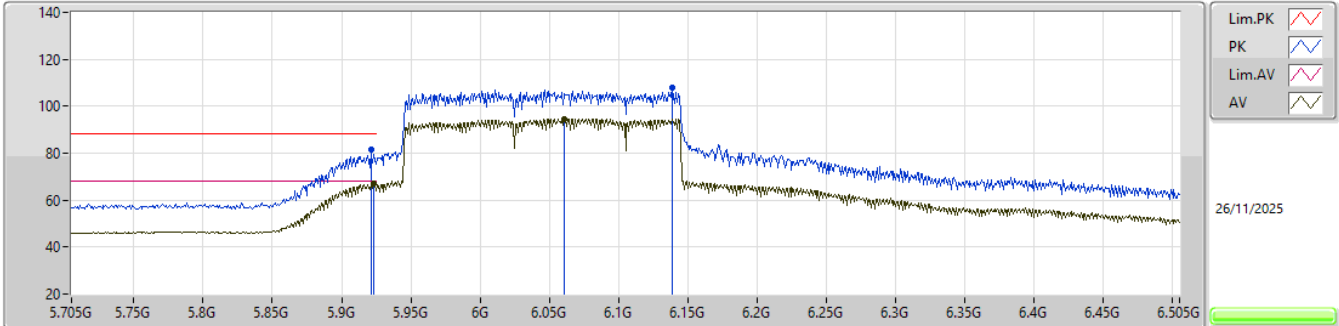


EUT_Y_2TX
Setting 90
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.921G	81.39	88.20	-6.81	69.25	3	Vertical	3	1.80	-	34.14	8.16	30.16			
RMS	5.9234G	66.83	68.20	-1.37	54.69	3	Vertical	3	1.80	-	34.15	8.15	30.16			
PK	6.1386G	107.90	Inf	-Inf	95.47	3	Vertical	3	1.80	-	34.58	8.04	30.19			
RMS	6.061G	94.71	Inf	-Inf	82.35	3	Vertical	3	1.80	-	34.42	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX

6105MHz_TX

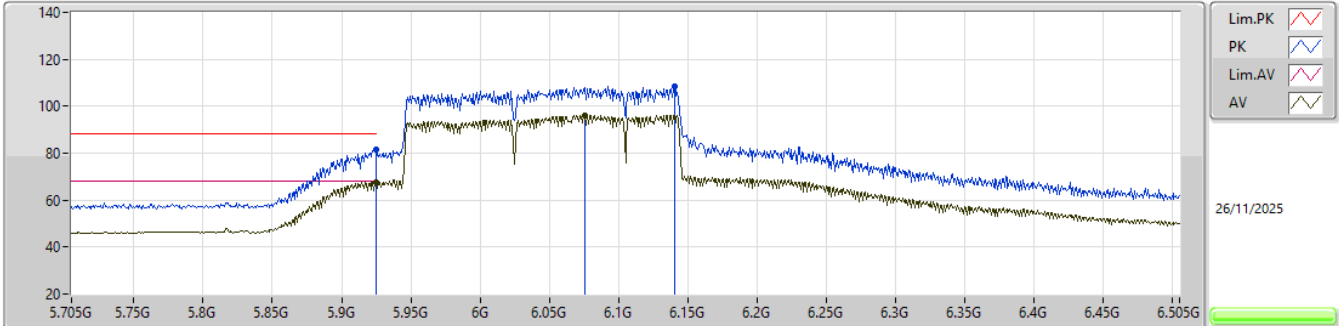


EUT_Y_2TX
Setting 90
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	81.72	88.20	-6.48	69.58	3	Horizontal	345	1.80	-	34.15	8.15	30.16			
RMS	5.925G	67.61	68.20	-0.59	55.47	3	Horizontal	345	1.80	-	34.15	8.15	30.16			
PK	6.1402G	108.60	Inf	-Inf	96.17	3	Horizontal	345	1.80	-	34.58	8.04	30.19			
RMS	6.0754G	96.23	Inf	-Inf	83.86	3	Horizontal	345	1.80	-	34.45	8.08	30.16			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

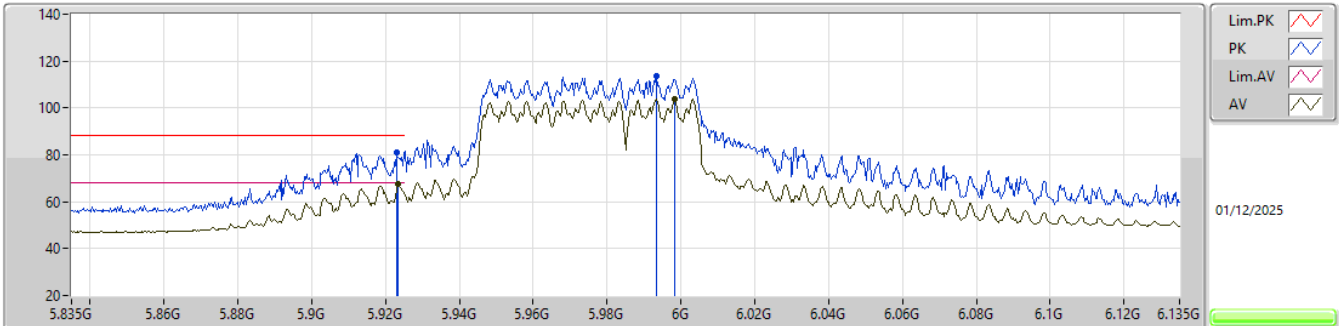


EUT_Y_4TX
Setting 76
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.9229G	80.93	88.20	-7.27	68.79	3	Vertical	0	1.72	-	34.15	8.15	30.16				
RMS	5.9235G	67.34	68.20	-0.86	55.20	3	Vertical	0	1.72	-	34.15	8.15	30.16				
PK	5.9934G	113.63	Inf	-Inf	101.35	3	Vertical	0	1.72	-	34.29	8.12	30.13				
RMS	5.9982G	103.88	Inf	-Inf	91.59	3	Vertical	0	1.72	-	34.30	8.12	30.13				

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

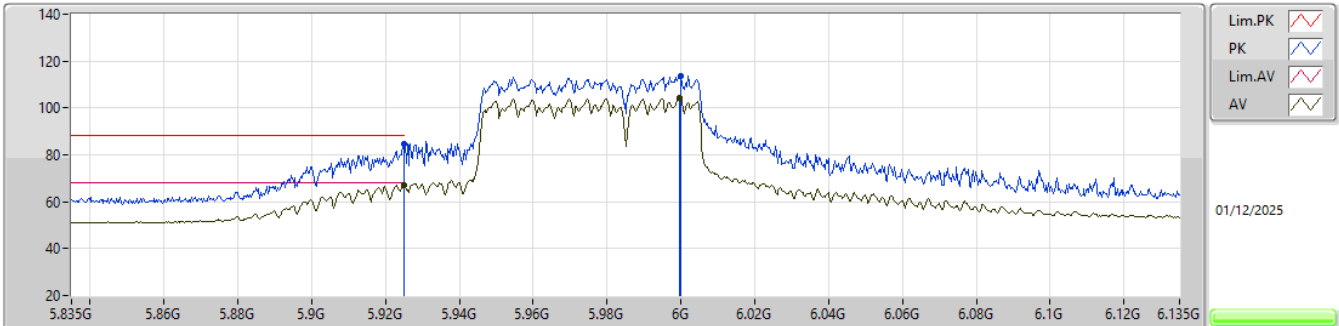EUT_Y_4TX
Setting 76
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	84.63	88.20	-3.57	72.49	3	Horizontal	-0	1.92	-	34.15	8.15	30.16			
RMS	5.925G	67.25	68.20	-0.95	55.11	3	Horizontal	-0	1.92	-	34.15	8.15	30.16			
PK	6G	113.75	Inf	-Inf	101.46	3	Horizontal	-0	1.92	-	34.30	8.12	30.13			
RMS	5.9997G	104.44	Inf	-Inf	92.15	3	Horizontal	-0	1.92	-	34.30	8.12	30.13			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

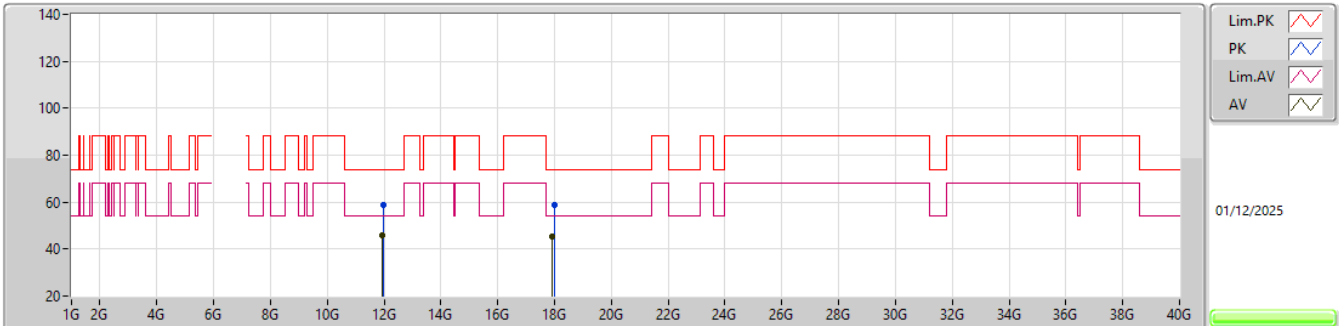EUT_Y_4TX
Setting 76
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.95788G	58.80	74.00	-15.20	52.71	3	Vertical	212	1.75	-	39.28	12.77	45.96			
AV	11.94768G	45.93	54.00	-8.07	39.82	3	Vertical	212	1.75	-	39.30	12.76	45.95			
PK	17.98724G	58.82	74.00	-15.18	42.32	3	Vertical	79	1.80	-	46.53	15.24	45.27			
AV	17.91652G	45.43	54.00	-8.57	28.82	3	Vertical	79	1.80	-	46.67	15.22	45.28			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

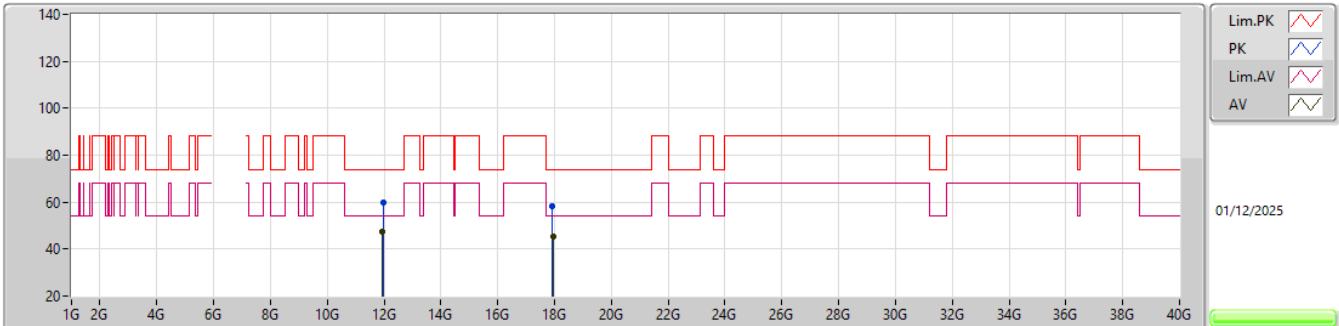EUT_Y_4TX
Setting 76
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.96784G	60.02	74.00	-13.98	53.95	3	Horizontal	150	1.71	-	39.26	12.77	45.96			
AV	11.9526G	47.54	54.00	-6.46	41.43	3	Horizontal	150	1.71	-	39.29	12.77	45.95			
PK	17.92752G	58.45	74.00	-15.55	41.86	3	Horizontal	47	1.34	-	46.64	15.23	45.28			
AV	17.94612G	45.55	54.00	-8.45	28.98	3	Horizontal	47	1.34	-	46.61	15.23	45.27			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

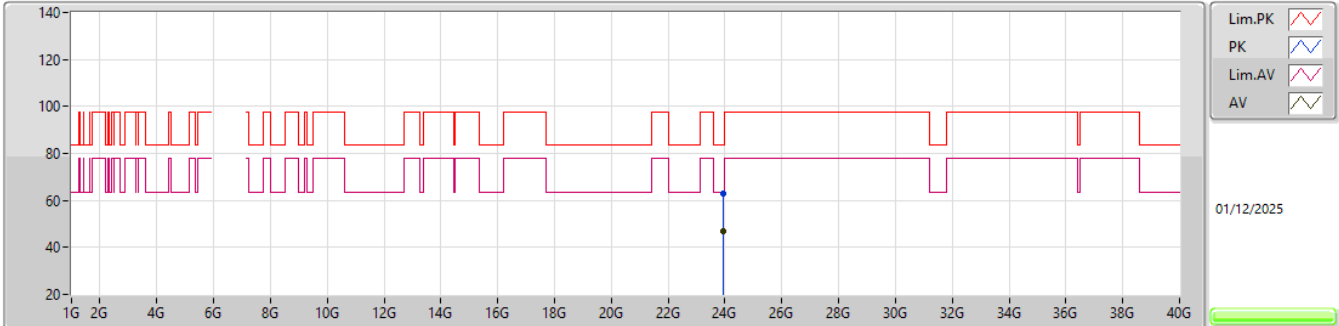EUT_Y_4TX
Setting 76
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.94108G	62.98	83.54	-20.56	52.44	1	Vertical	168	1.81	-	38.86	18.77	47.09			
AV	23.92644G	46.76	63.54	-16.78	36.28	1	Vertical	168	1.81	-	38.81	18.76	47.09			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX


5985MHz_TX

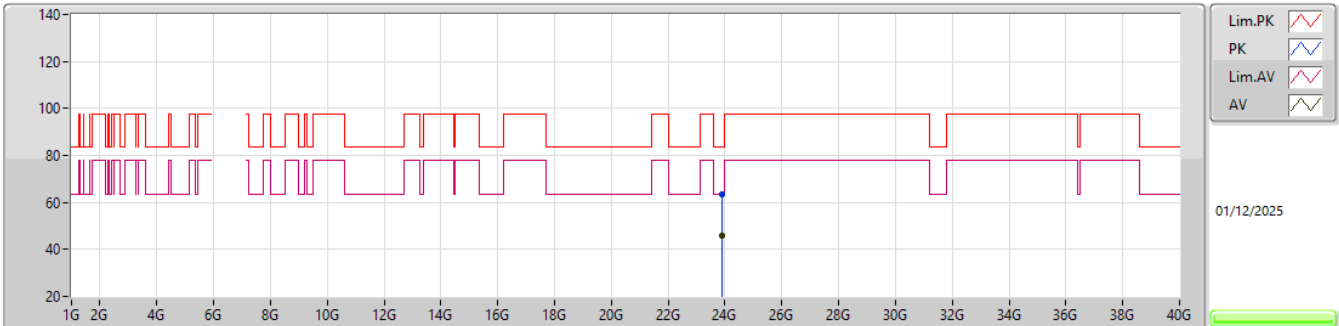EUT_Y_4TX
Setting 76
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.89232G	63.28	83.54	-20.26	52.95	1	Horizontal	172	1.52	-	38.68	18.76	47.11			
AV	23.91152G	45.85	63.54	-17.69	35.44	1	Horizontal	172	1.52	-	38.75	18.76	47.10			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

6025MHz_TX

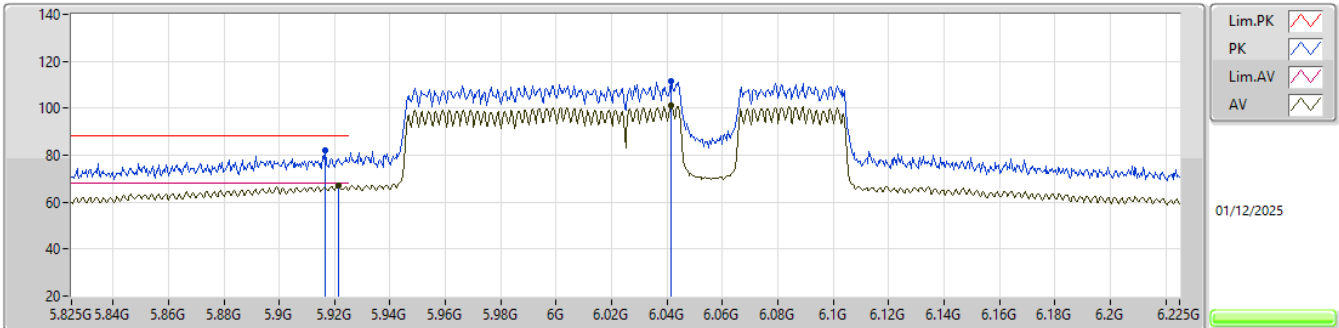


EUT_Y_4TX
Setting 79
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9166G	81.92	88.20	-6.28	69.79	3	Vertical	358	1.80	-	34.13	8.16	30.16			
RMS	5.9214G	67.17	68.20	-1.03	55.03	3	Vertical	358	1.80	-	34.14	8.16	30.16			
PK	6.0414G	111.75	Inf	-Inf	99.42	3	Vertical	358	1.80	-	34.38	8.10	30.15			
RMS	6.0414G	100.99	Inf	-Inf	88.66	3	Vertical	358	1.80	-	34.38	8.10	30.15			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


6025MHz_TX

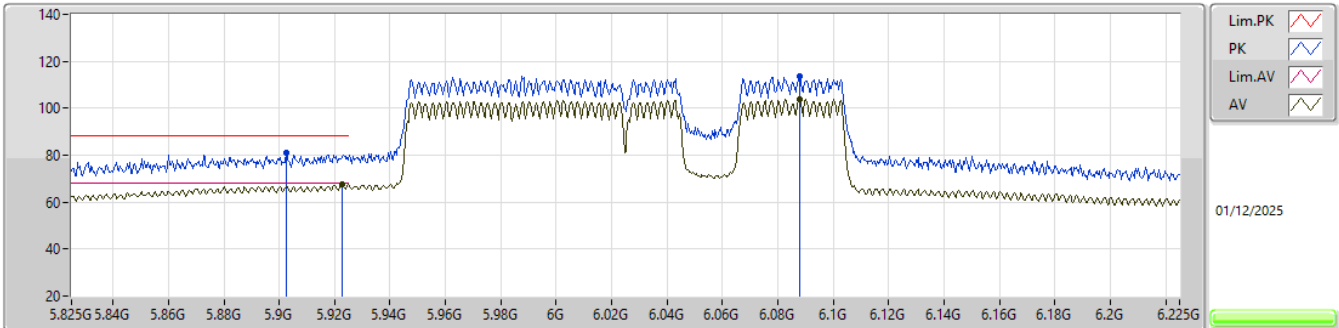EUT_Y_4TX
Setting 79
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9026G	81.24	88.20	-6.96	69.14	3	Horizontal	358	1.80	-	34.11	8.16	30.17			
RMS	5.9226G	67.59	68.20	-0.61	55.45	3	Horizontal	358	1.80	-	34.15	8.15	30.16			
PK	6.0878G	113.47	Inf	-Inf	101.09	3	Horizontal	358	1.80	-	34.48	8.07	30.17			
RMS	6.0878G	103.75	Inf	-Inf	91.37	3	Horizontal	358	1.80	-	34.48	8.07	30.17			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


6025MHz_TX

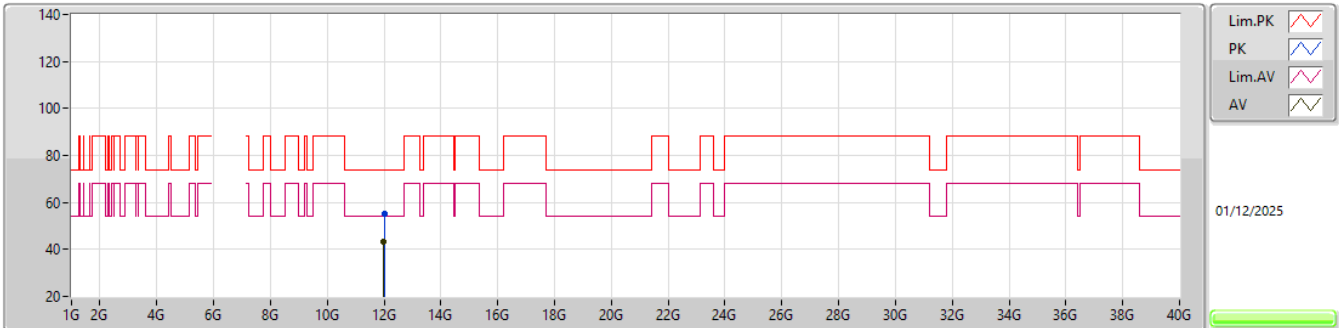EUT_V_4TX
Setting 79
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.00296G	55.13	74.00	-18.87	49.12	3	Vertical	157	2.13	-	39.19	12.79	45.97			
AV	11.99252G	43.09	54.00	-10.91	37.06	3	Vertical	157	2.13	-	39.21	12.79	45.97			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

6025MHz_TX

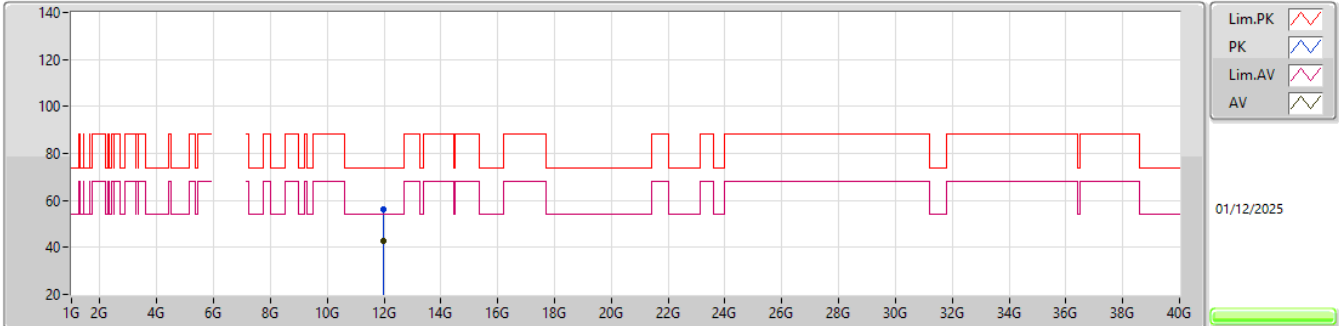


EUT V_4TX
Setting 79
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.99276G	56.17	74.00	-17.83	50.14	3	Horizontal	163	2.16	-	39.21	12.79	45.97			
AV	11.99264G	43.01	54.00	-10.99	36.98	3	Horizontal	163	2.16	-	39.21	12.79	45.97			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


6025MHz_TX

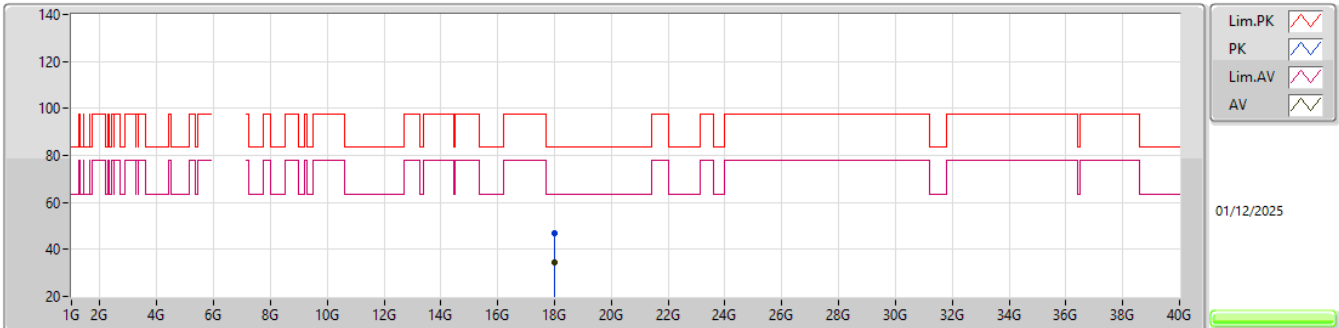EUT_Y_4TX
Setting 79
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.00012G	46.94	83.54	-36.60	42.65	1	Vertical	238	1.97	-	37.50	16.28	49.49			
AV	17.9966G	34.67	63.54	-28.87	30.38	1	Vertical	238	1.97	-	37.49	16.28	49.48			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


6025MHz_TX

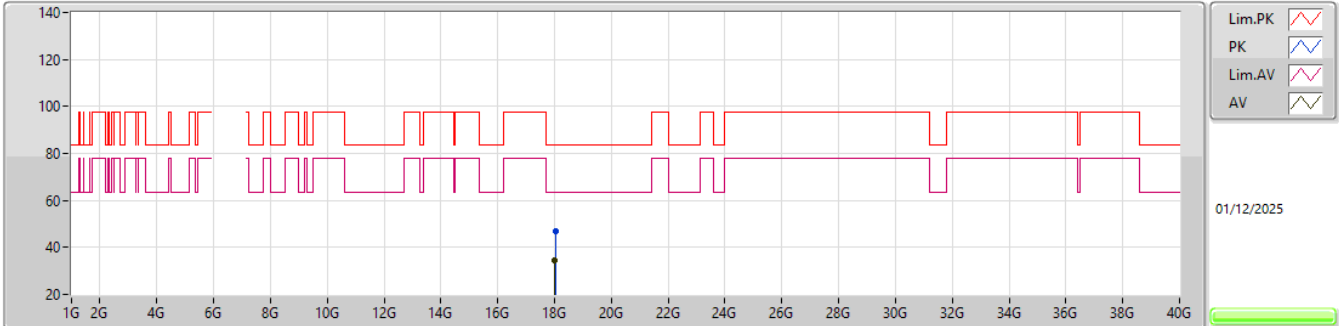EUT_Y_4TX
Setting 79
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.04444G	46.69	83.54	-36.85	42.58	1	Horizontal	82	2.99	-	37.32	16.30	49.51			
AV	18.00236G	34.56	63.54	-28.98	30.28	1	Horizontal	82	2.99	-	37.49	16.28	49.49			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

6025MHz_TX

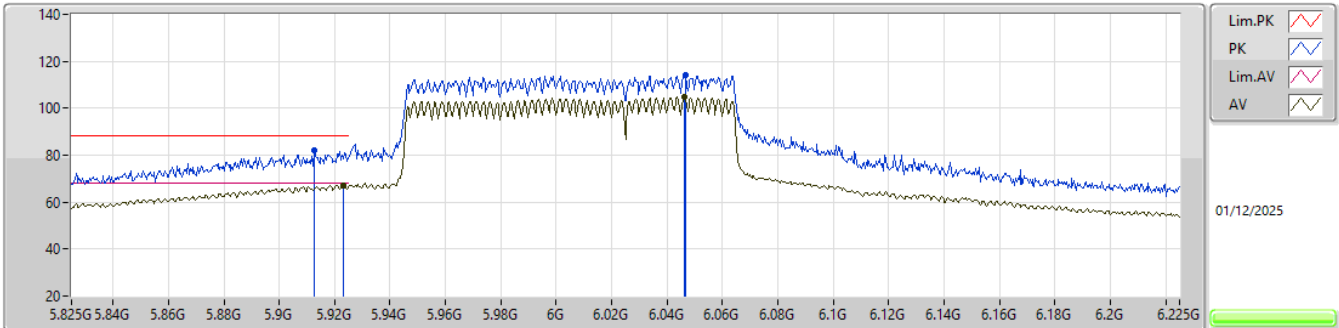


EUT_Y_4TX
Setting 75
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9126G	82.18	88.20	-6.02	70.05	3	Vertical	359	1.80	-	34.13	8.16	30.16			
RMS	5.923G	67.27	68.20	-0.93	55.13	3	Vertical	359	1.80	-	34.15	8.15	30.16			
PK	6.0466G	114.24	Inf	-Inf	101.91	3	Vertical	359	1.80	-	34.39	8.09	30.15			
RMS	6.0462G	104.75	Inf	-Inf	92.42	3	Vertical	359	1.80	-	34.39	8.09	30.15			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

6025MHz_TX

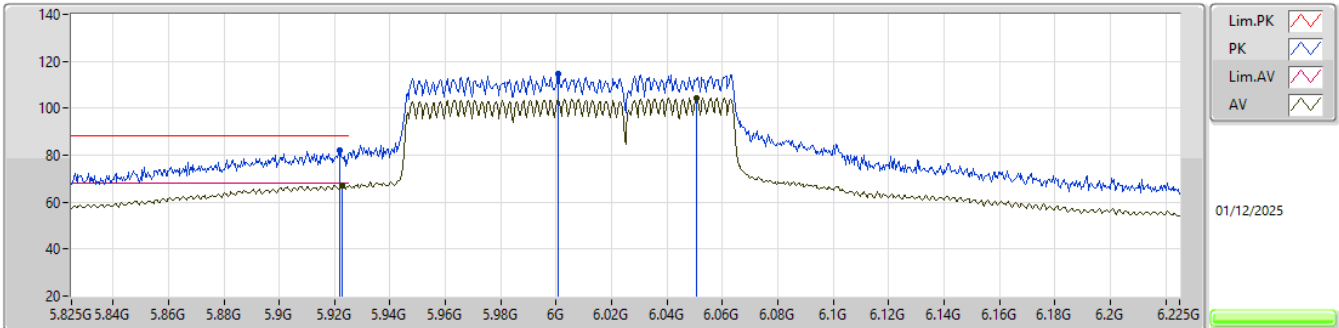


EUT_Y_4TX
Setting 75
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9218G	82.21	88.20	-5.99	70.07	3	Horizontal	356	1.96	-	34.14	8.16	30.16			
RMS	5.9226G	66.94	68.20	-1.26	54.80	3	Horizontal	356	1.96	-	34.15	8.15	30.16			
PK	6.0006G	114.53	Inf	-Inf	102.24	3	Horizontal	356	1.96	-	34.30	8.12	30.13			
RMS	6.0506G	104.34	Inf	-Inf	92.00	3	Horizontal	356	1.96	-	34.40	8.09	30.15			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX


6025MHz_TX

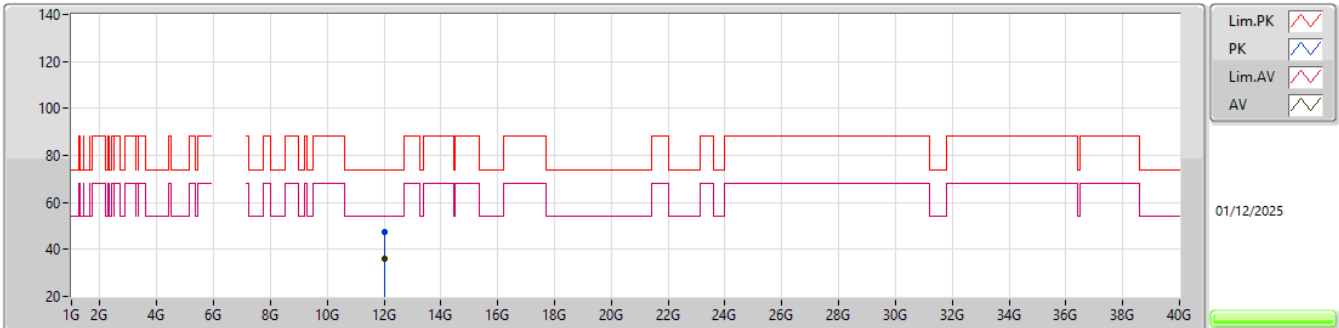EUT_Y_4TX
Setting 75
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.01288G	47.66	74.00	-26.34	41.66	3	Vertical	228	1.17	-	39.17	12.79	45.96			
AV	12.01272G	35.85	54.00	-18.15	29.85	3	Vertical	228	1.17	-	39.17	12.79	45.96			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX


6025MHz_TX

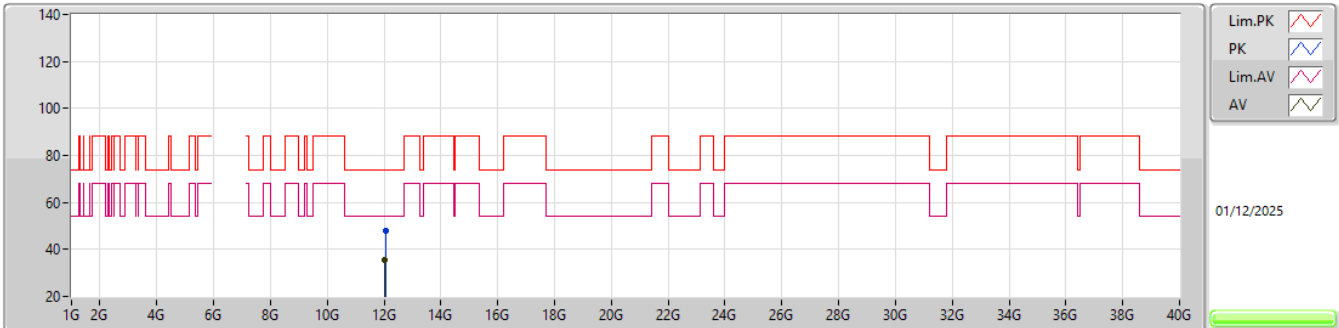EUT_V_4TX
Setting 75
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.0428G	47.93	74.00	-26.07	41.95	3	Horizontal	147	2.31	-	39.11	12.80	45.93			
AV	12.01224G	35.53	54.00	-18.47	29.52	3	Horizontal	147	2.31	-	39.18	12.79	45.96			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX


6025MHz_TX

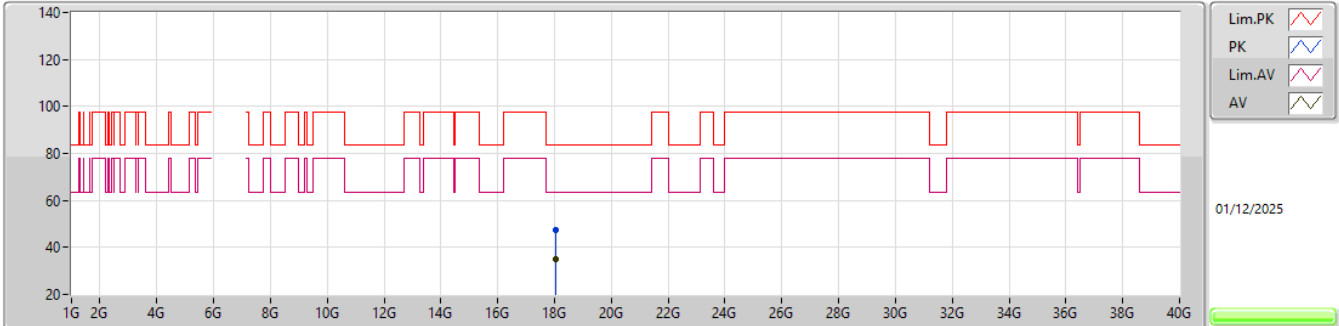EUT_Y_4TX
Setting 75
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.03468G	47.38	83.54	-36.16	43.23	1	Vertical	84	1.70	-	37.36	16.30	49.51			
AV	18.0374G	34.78	63.54	-28.76	30.64	1	Vertical	84	1.70	-	37.35	16.30	49.51			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX


6025MHz_TX

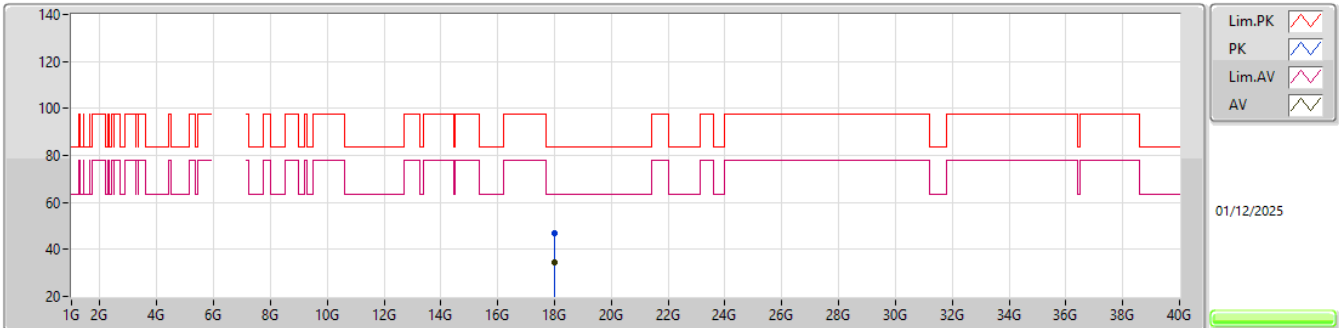EUT_Y_4TX
Setting 75
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.00396G	47.13	83.54	-36.41	42.86	1	Horizontal	190	1.40	-	37.48	16.28	49.49			
AV	18.00988G	34.71	63.54	-28.83	30.45	1	Horizontal	190	1.40	-	37.46	16.29	49.49			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX

6105MHz_TX

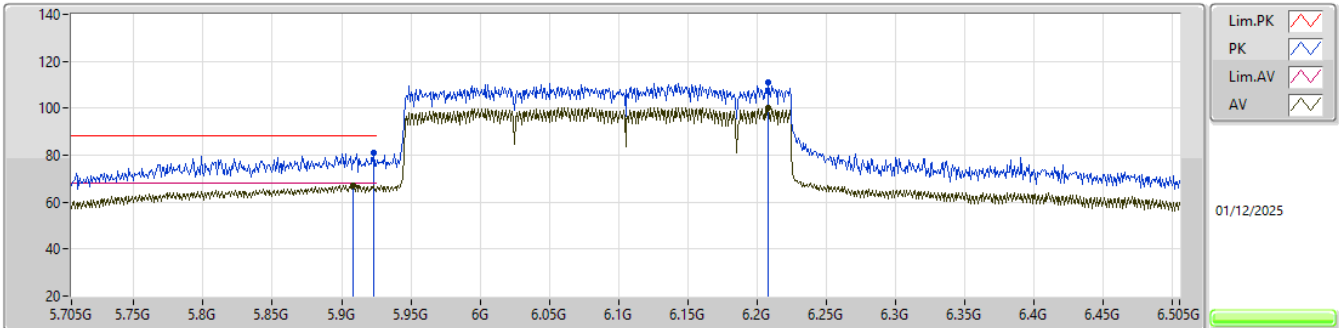


EUT_Y_4TX
Setting 81
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9234G	80.81	88.20	-7.39	68.67	3	Vertical	360	1.48	-	34.15	8.15	30.16			
RMS	5.9082G	67.23	68.20	-0.97	55.11	3	Vertical	360	1.48	-	34.12	8.16	30.16			
PK	6.2082G	110.82	Inf	-Inf	98.41	3	Vertical	360	1.48	-	34.60	8.02	30.21			
RMS	6.2082G	100.20	Inf	-Inf	87.79	3	Vertical	360	1.48	-	34.60	8.02	30.21			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX

6105MHz_TX

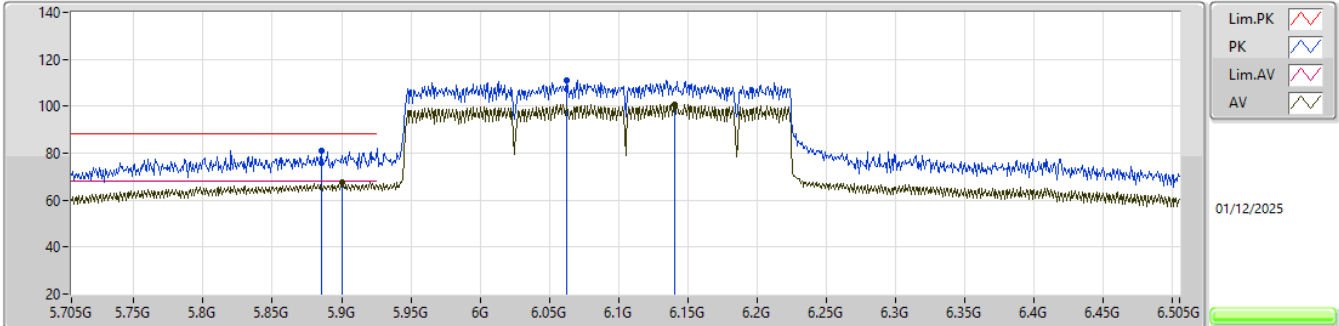


EUT_Y_4TX
Setting 81
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.8858G	81.14	88.20	-7.06	69.10	3	Horizontal	358	1.80	-	34.04	8.17	30.17			
RMS	5.9002G	67.75	68.20	-0.45	55.66	3	Horizontal	358	1.80	-	34.10	8.16	30.17			
PK	6.0626G	111.05	Inf	-Inf	98.69	3	Horizontal	358	1.80	-	34.43	8.09	30.16			
RMS	6.1402G	100.88	Inf	-Inf	88.45	3	Horizontal	358	1.80	-	34.58	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX


6105MHz_TX

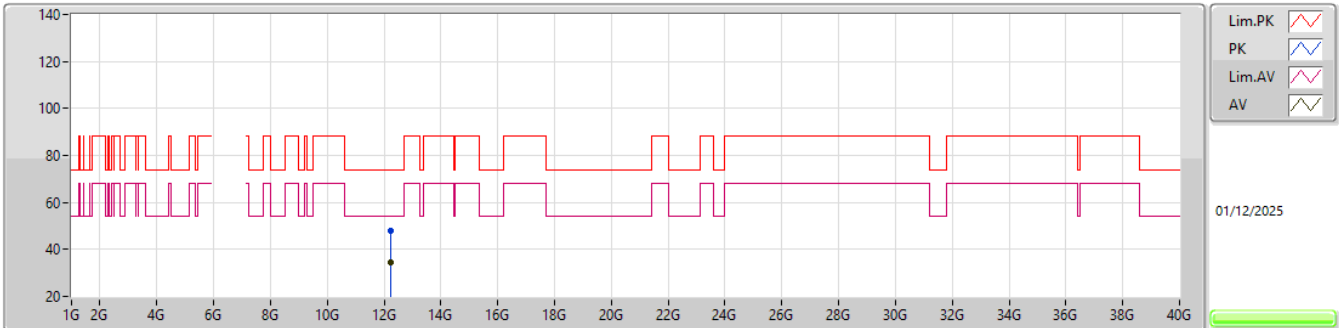EUT_Y_4TX
Setting 81
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.22464G	48.07	74.00	-25.93	42.24	3	Vertical	276	2.32	-	38.75	12.82	45.74			
AV	12.2224G	34.64	54.00	-19.36	28.80	3	Vertical	276	2.32	-	38.76	12.82	45.74			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX


6105MHz_TX

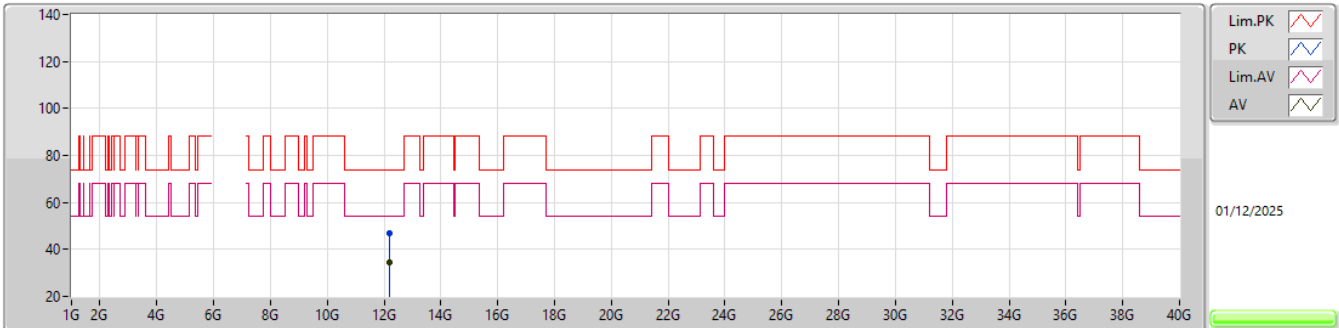EUT_V_4TX
Setting 81
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.20792G	47.08	74.00	-26.92	41.24	3	Horizontal	311	2.47	-	38.78	12.82	45.76			
AV	12.2012G	34.59	54.00	-19.41	28.73	3	Horizontal	311	2.47	-	38.80	12.82	45.76			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX

6105MHz_TX

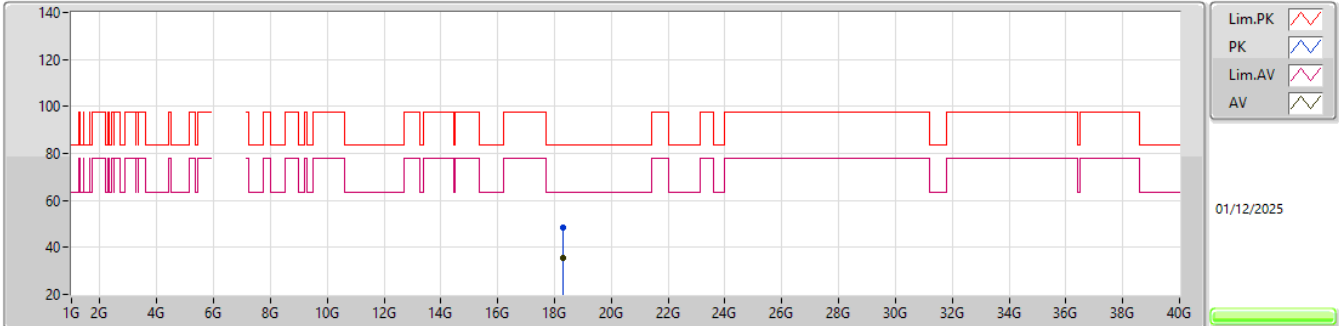


EUT_V_4TX
Setting 81
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31564G	48.68	83.54	-34.86	44.38	1	Vertical	214	1.80	-	37.50	16.44	49.64			
AV	18.32044G	35.39	63.54	-28.15	31.09	1	Vertical	214	1.80	-	37.50	16.44	49.64			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX

6105MHz_TX

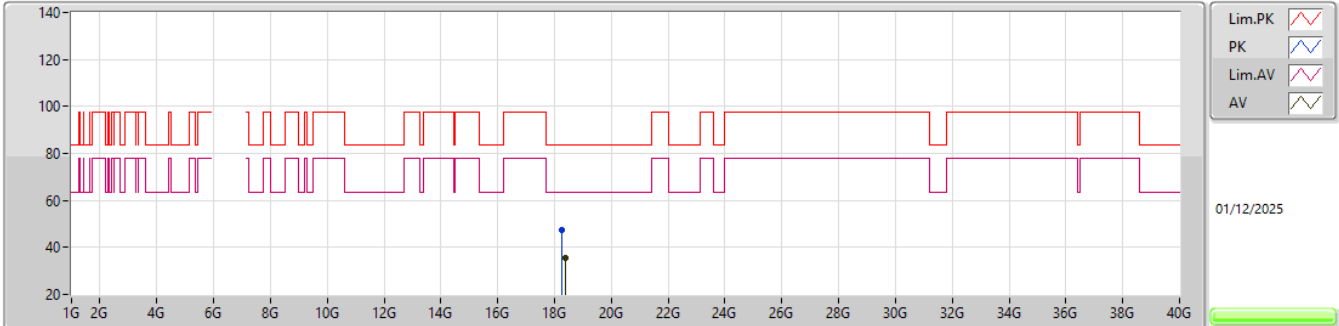


EUT_V_4TX
Setting 81
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.25772G	47.67	83.54	-35.87	43.29	1	Horizontal	50	1.96	-	37.58	16.41	49.61			
AV	18.3726G	35.28	63.54	-28.26	30.92	1	Horizontal	50	1.96	-	37.55	16.47	49.66			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX


6105MHz_TX

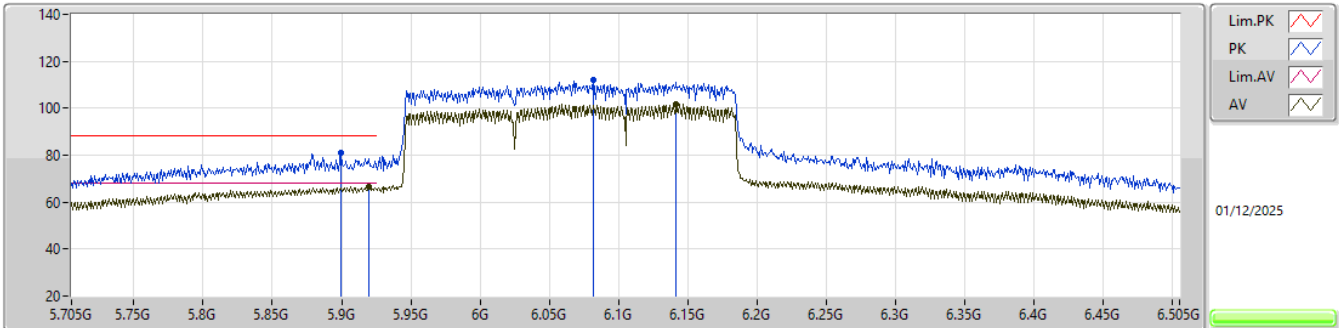EUT_Y_4TX
Setting 81
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8994G	80.86	88.20	-7.34	68.76	3	Vertical	355	1.78	-	34.10	8.17	30.17			
RMS	5.9194G	66.70	68.20	-1.50	54.56	3	Vertical	355	1.78	-	34.14	8.16	30.16			
PK	6.0818G	112.02	Inf	-Inf	99.64	3	Vertical	355	1.78	-	34.46	8.08	30.16			
RMS	6.1418G	101.89	Inf	-Inf	89.46	3	Vertical	355	1.78	-	34.58	8.04	30.19			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

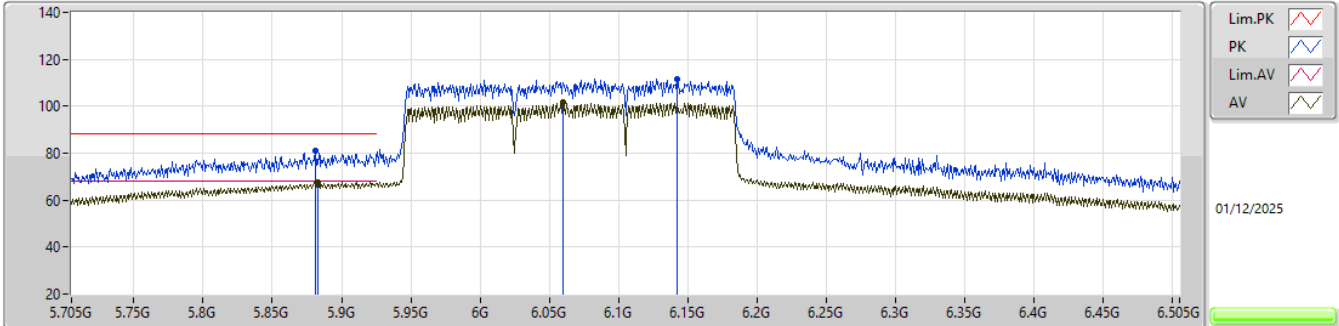


EUT_Y_4TX
Setting 81
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.881G	81.22	88.20	-6.98	69.20	3	Horizontal	358	1.80	-	34.02	8.17	30.17			
RMS	5.8826G	67.84	68.20	-0.36	55.81	3	Horizontal	358	1.80	-	34.03	8.17	30.17			
PK	6.1426G	111.67	Inf	-Inf	99.23	3	Horizontal	358	1.80	-	34.59	8.04	30.19			
RMS	6.0602G	101.54	Inf	-Inf	89.18	3	Horizontal	358	1.80	-	34.42	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX


6105MHz_TX

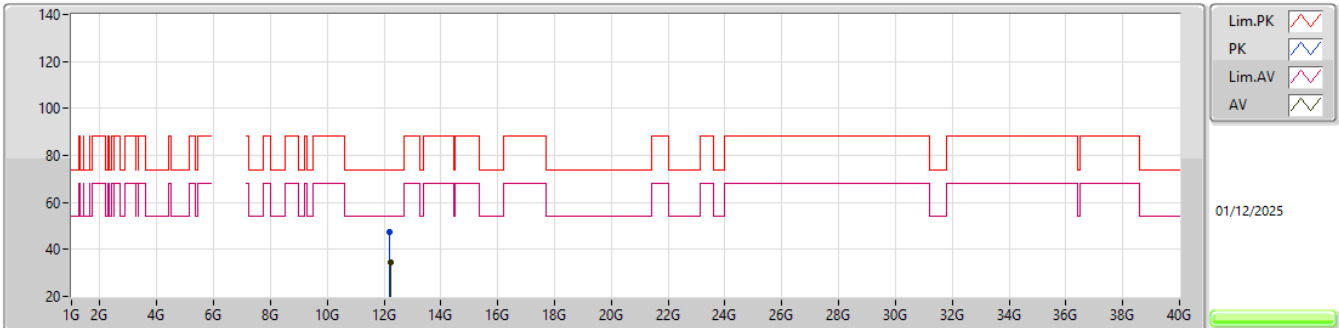EUT_V_4TX
Setting 81
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.17352G	47.27	74.00	-26.73	41.39	3	Vertical	231	1.28	-	38.85	12.82	45.79			
AV	12.22728G	34.58	54.00	-19.42	28.74	3	Vertical	231	1.28	-	38.75	12.83	45.74			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX


6105MHz_TX

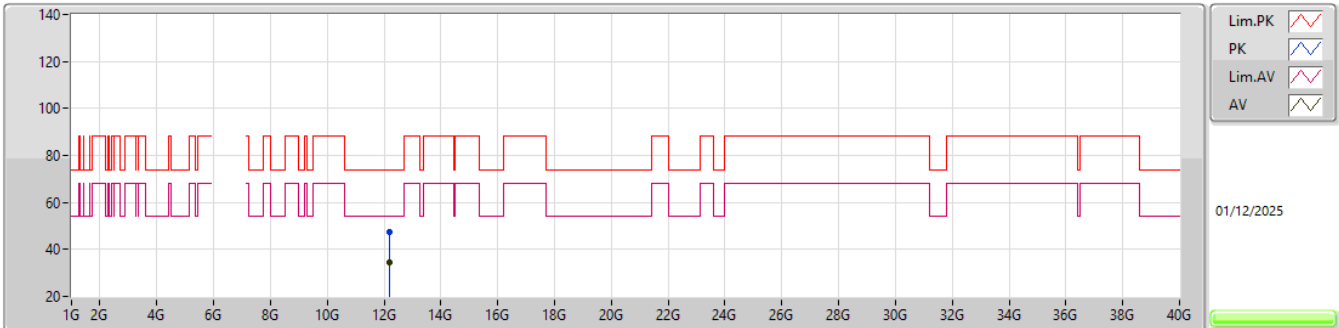EUT_V_4TX
Setting 81
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.21064G	47.59	74.00	-26.41	41.75	3	Horizontal	262	2.34	-	38.78	12.82	45.76			
AV	12.20552G	34.46	54.00	-19.54	28.61	3	Horizontal	262	2.34	-	38.79	12.82	45.76			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX


6105MHz_TX

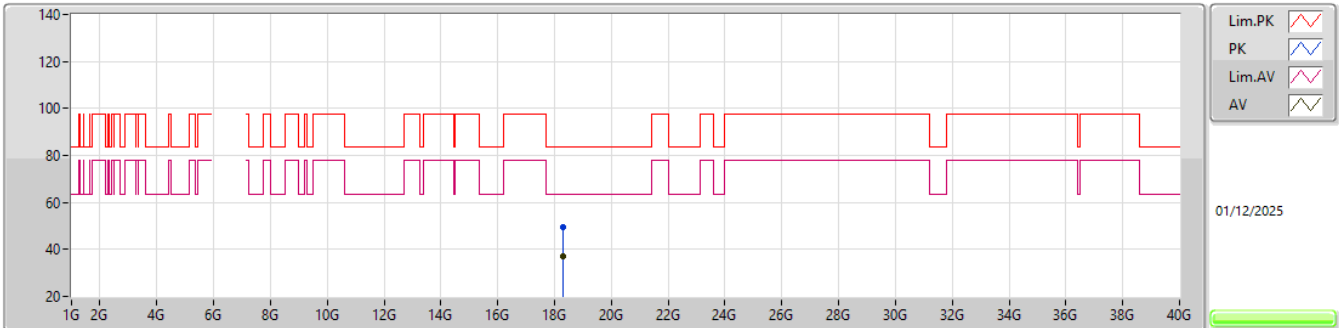EUT_V_4TX
Setting 81
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.30572G	49.33	83.54	-34.21	45.02	1	Vertical	4	1.96	-	37.50	16.44	49.63			
AV	18.31612G	36.93	63.54	-26.61	32.63	1	Vertical	4	1.96	-	37.50	16.44	49.64			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

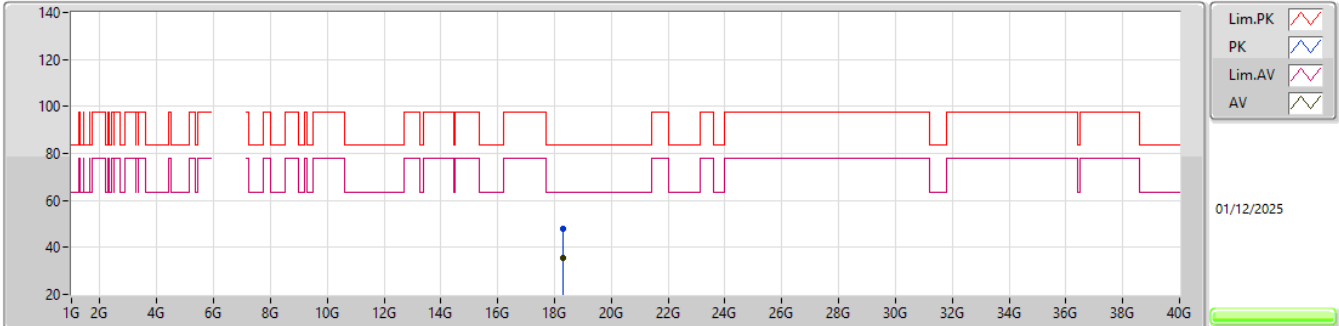


EUT_Y_4TX
Setting 81
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31868G	47.82	83.54	-35.72	43.52	1	Horizontal	358	1.42	-	37.50	16.44	49.64			
AV	18.31724G	35.48	63.54	-28.06	31.18	1	Horizontal	358	1.42	-	37.50	16.44	49.64			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

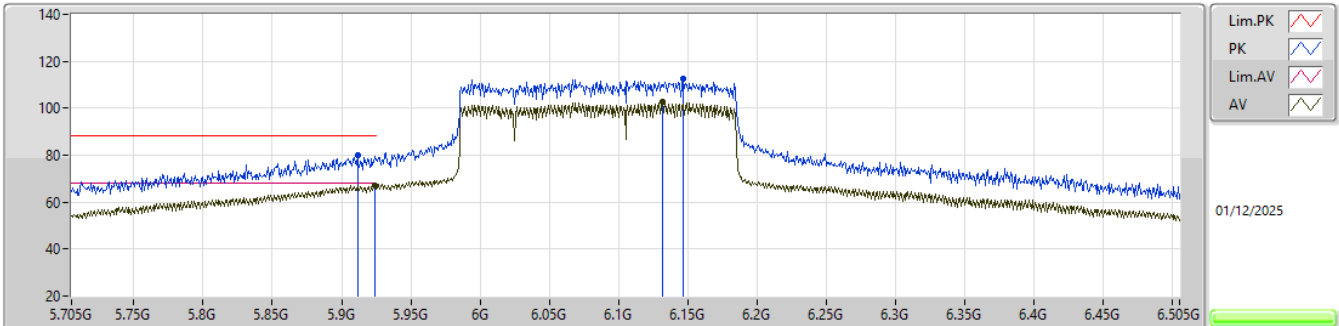EUT_Y_4TX
Setting 80
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9114G	80.22	88.20	-7.98	68.10	3	Vertical	358	1.59	-	34.12	8.16	30.16			
RMS	5.9242G	67.16	68.20	-1.04	55.02	3	Vertical	358	1.59	-	34.15	8.15	30.16			
PK	6.1466G	112.38	Inf	-Inf	99.94	3	Vertical	358	1.59	-	34.59	8.04	30.19			
RMS	6.1314G	102.52	Inf	-Inf	90.09	3	Vertical	358	1.59	-	34.56	8.05	30.18			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX

6105MHz_TX

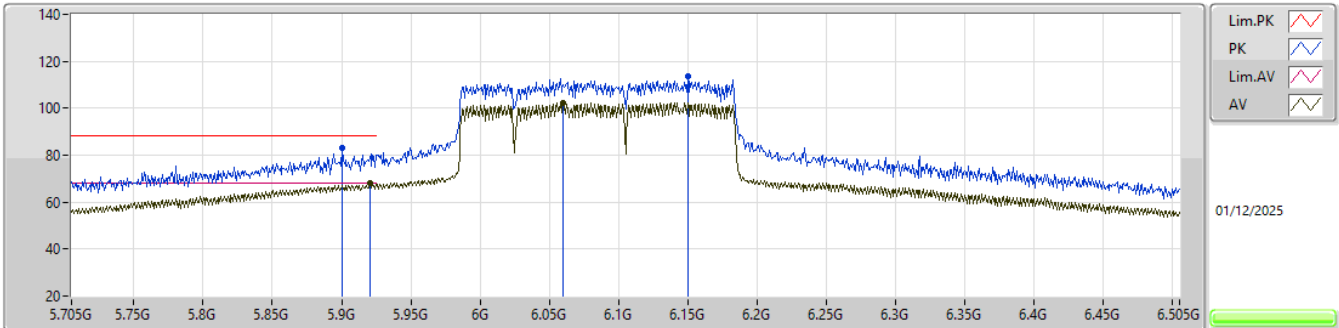


EUT_Y_4TX
Setting 80
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9002G	83.15	88.20	-5.05	71.06	3	Horizontal	358	1.80	-	34.10	8.16	30.17			
RMS	5.9202G	68.03	68.20	-0.17	55.89	3	Horizontal	358	1.80	-	34.14	8.16	30.16			
PK	6.1498G	113.39	Inf	-Inf	100.94	3	Horizontal	358	1.80	-	34.60	8.04	30.19			
RMS	6.0602G	102.41	Inf	-Inf	90.05	3	Horizontal	358	1.80	-	34.42	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

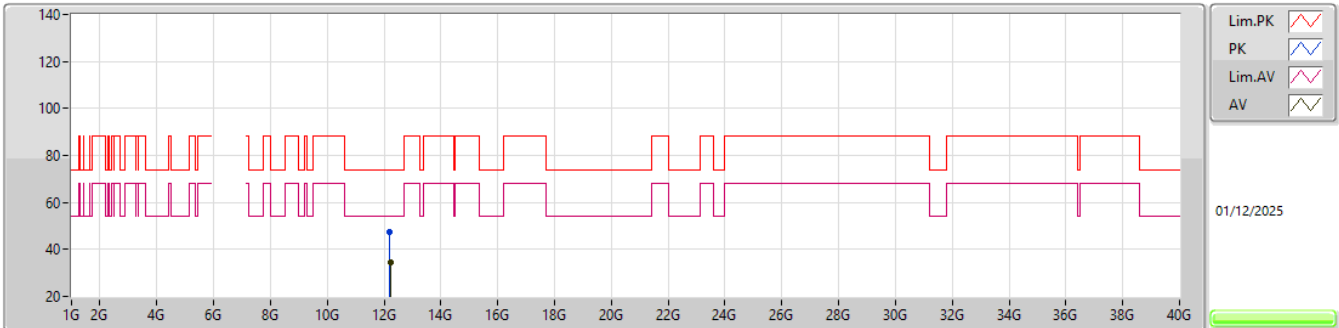EUT_V_4TX
Setting 80
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.18752G	47.55	74.00	-26.45	41.69	3	Vertical	81	2.87	-	38.82	12.82	45.78			
AV	12.21896G	34.64	54.00	-19.36	28.81	3	Vertical	81	2.87	-	38.76	12.82	45.75			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

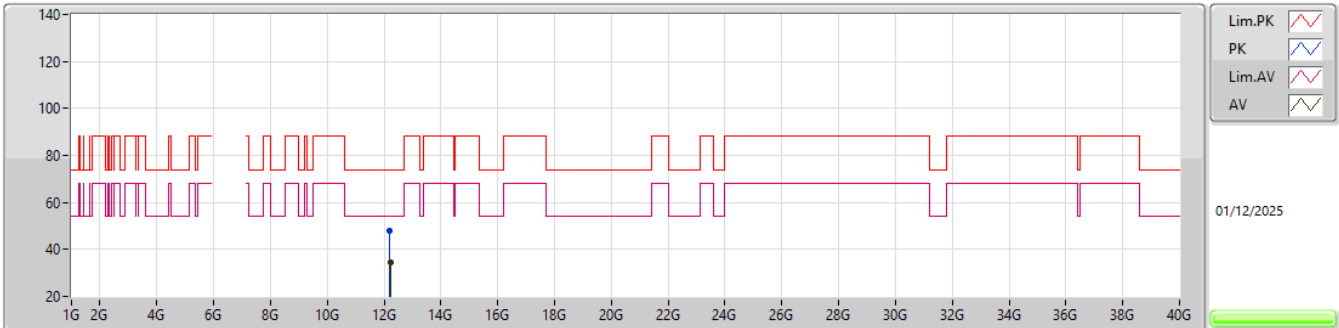EUT_V_4TX
Setting 80
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.19408G	47.94	74.00	-26.06	42.08	3	Horizontal	95	1.80	-	38.81	12.82	45.77			
AV	12.2304G	34.53	54.00	-19.47	28.69	3	Horizontal	95	1.80	-	38.74	12.83	45.73			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

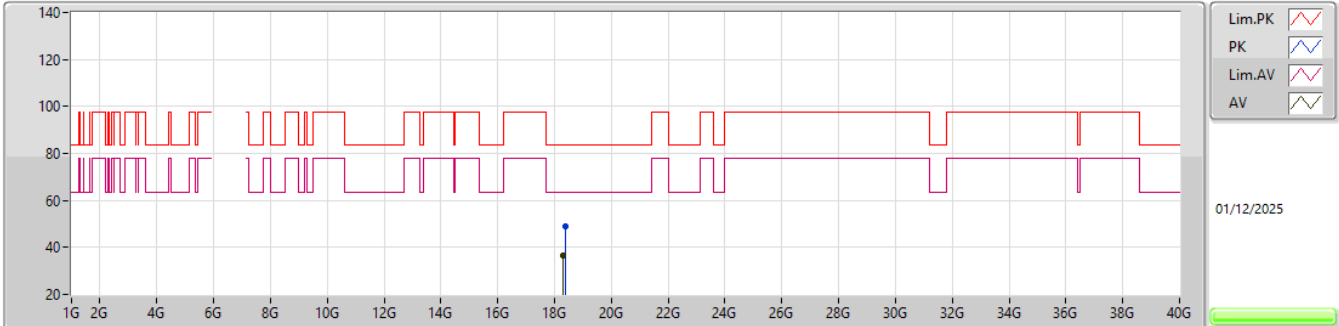EUT_Y_4TX
Setting 80
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.391G	49.05	83.54	-34.49	44.66	1	Vertical	85	1.19	-	37.58	16.48	49.67			
AV	18.31692G	36.43	63.54	-27.11	32.13	1	Vertical	85	1.19	-	37.50	16.44	49.64			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

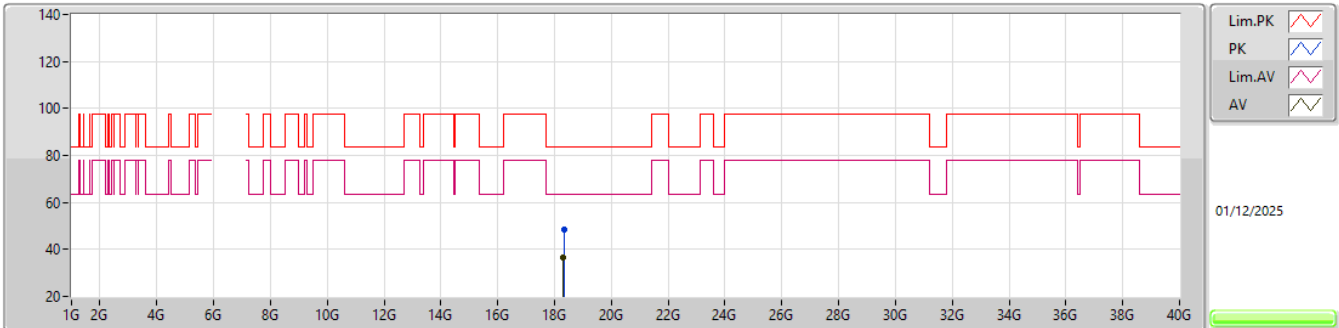EUT_V_4TX
Setting 80
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.327G	48.50	83.54	-35.04	44.19	1	Horizontal	57	1.94	-	37.50	16.45	49.64			
AV	18.3166G	36.61	63.54	-26.93	32.31	1	Horizontal	57	1.94	-	37.50	16.44	49.64			

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

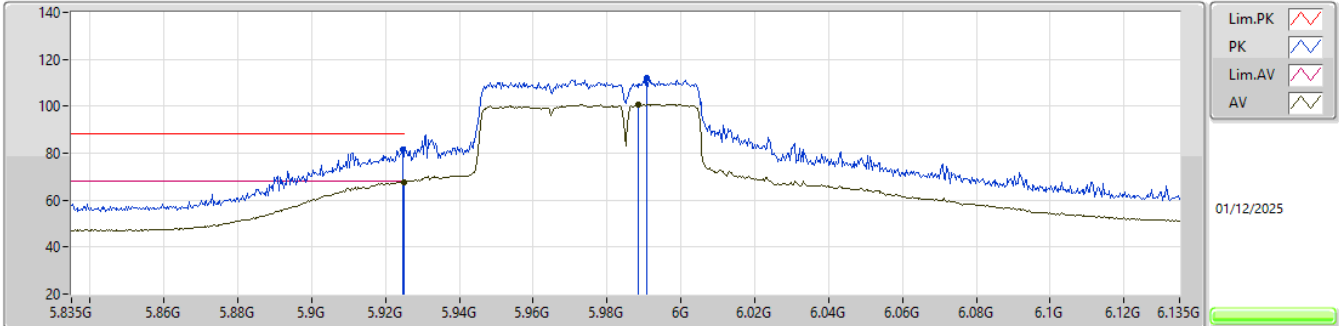


EUT_Y_4TX
Setting 79
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9247G	81.65	88.20	-6.55	69.51	3	Vertical	360	1.73	-	34.15	8.15	30.16			
RMS	5.925G	67.77	68.20	-0.43	55.63	3	Vertical	360	1.73	-	34.15	8.15	30.16			
PK	5.9907G	111.84	Inf	-Inf	99.57	3	Vertical	360	1.73	-	34.28	8.12	30.13			
RMS	5.9883G	100.94	Inf	-Inf	88.66	3	Vertical	360	1.73	-	34.28	8.13	30.13			

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

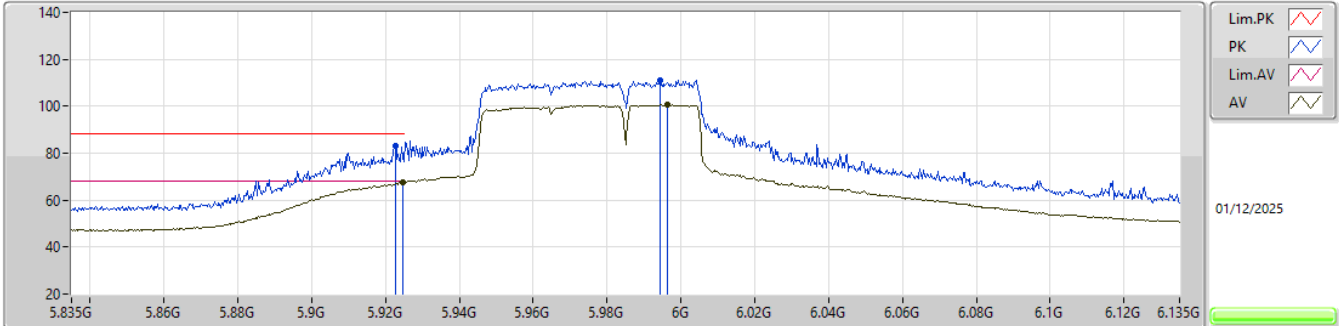


EUT_Y_4TX
Setting 79
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9226G	83.07	88.20	-5.13	70.93	3	Horizontal	340	1.87	-	34.15	8.15	30.16			
RMS	5.9247G	67.74	68.20	-0.46	55.60	3	Horizontal	340	1.87	-	34.15	8.15	30.16			
PK	5.9943G	111.21	Inf	-Inf	98.93	3	Horizontal	340	1.87	-	34.29	8.12	30.13			
RMS	5.9964G	100.51	Inf	-Inf	88.23	3	Horizontal	340	1.87	-	34.29	8.12	30.13			

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU 6_4TX

6025MHz_TX

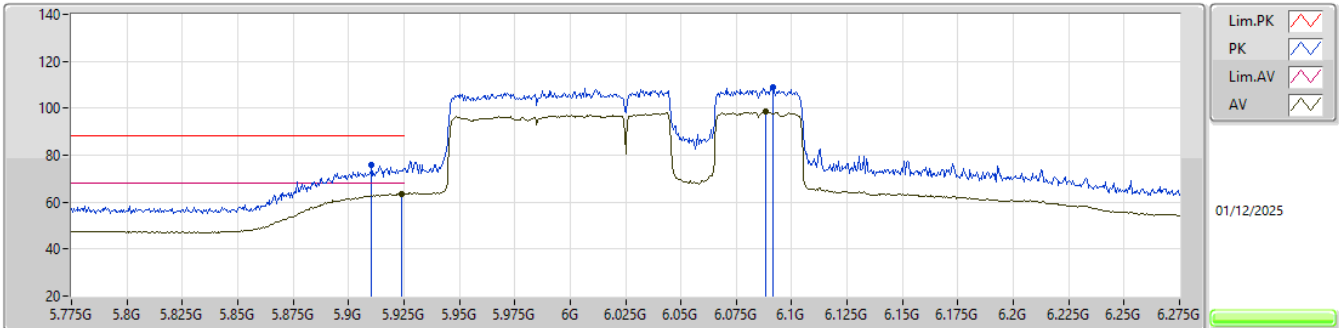


EUT_Y_4TX
Setting 83
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9105G	75.71	88.20	-12.49	63.59	3	Vertical	359	1.80	-	34.12	8.16	30.16
RMS	5.924G	63.67	68.20	-4.53	51.53	3	Vertical	359	1.80	-	34.15	8.15	30.16
PK	6.0915G	108.83	Inf	-Inf	96.45	3	Vertical	359	1.80	-	34.48	8.07	30.17
RMS	6.088G	98.37	Inf	-Inf	85.99	3	Vertical	359	1.80	-	34.48	8.07	30.17

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU 6_4TX

6025MHz_TX

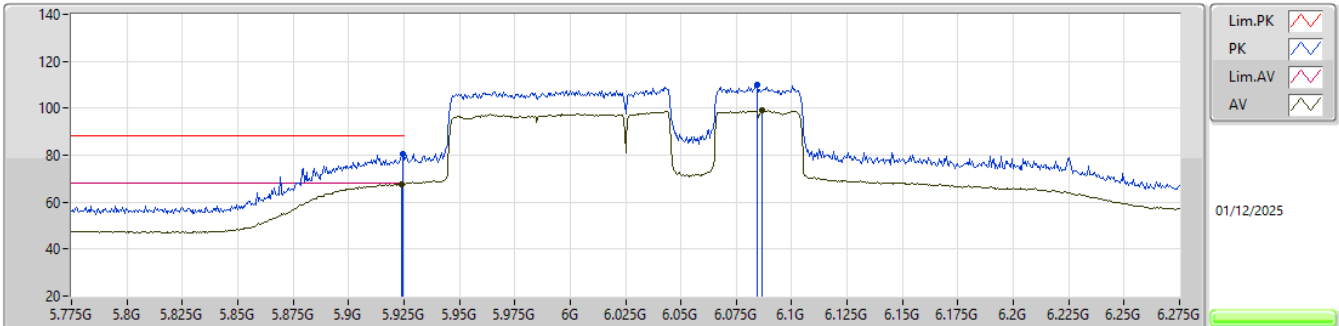


EUT_Y_4TX
Setting 83
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9245G	80.68	88.20	-7.52	68.54	3	Horizontal	340	1.80	-	34.15	8.15	30.16			
RMS	5.924G	67.84	68.20	-0.36	55.70	3	Horizontal	340	1.80	-	34.15	8.15	30.16			
PK	6.0845G	110.19	Inf	-Inf	97.81	3	Horizontal	340	1.80	-	34.47	8.07	30.16			
RMS	6.0865G	99.10	Inf	-Inf	86.72	3	Horizontal	340	1.80	-	34.47	8.07	30.16			

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU_4_4TX

6025MHz_TX

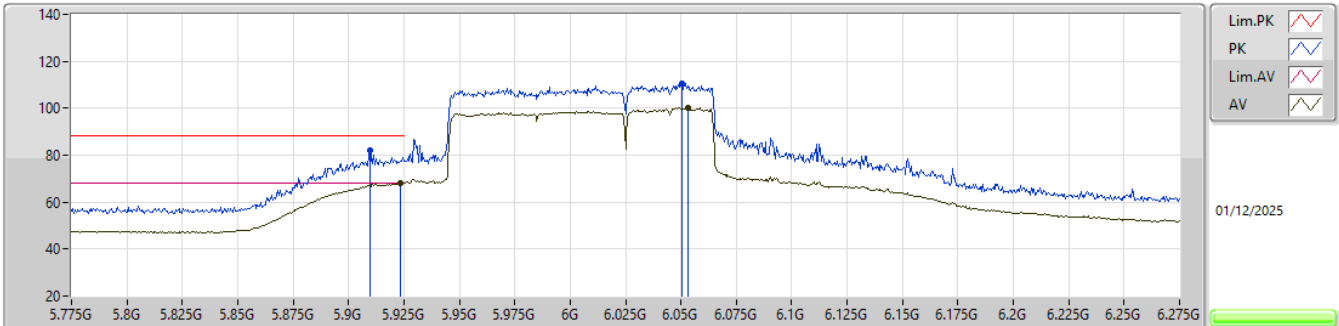


EUT_Y_4TX
Setting 81
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9095G	81.93	88.20	-6.27	69.81	3	Vertical	1	1.88	-	34.12	8.16	30.16			
RMS	5.9235G	68.16	68.20	-0.04	56.02	3	Vertical	1	1.88	-	34.15	8.15	30.16			
PK	6.0505G	110.62	Inf	-Inf	98.28	3	Vertical	1	1.88	-	34.40	8.09	30.15			
RMS	6.053G	100.37	Inf	-Inf	88.02	3	Vertical	1	1.88	-	34.41	8.09	30.15			

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU 4_4TX

6025MHz_TX

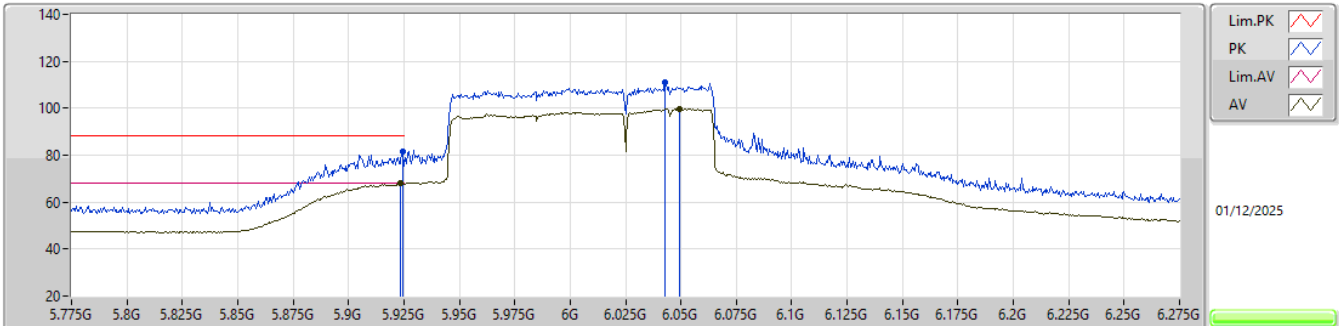


EUT_Y_4TX
Setting 81
02-D-J-11-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9245G	81.74	88.20	-6.46	69.60	3	Horizontal	339	1.97	-	34.15	8.15	30.16			
RMS	5.9235G	68.09	68.20	-0.11	55.95	3	Horizontal	339	1.97	-	34.15	8.15	30.16			
PK	6.043G	111.18	Inf	-Inf	98.84	3	Horizontal	339	1.97	-	34.39	8.10	30.15			
RMS	6.0495G	99.68	Inf	-Inf	87.34	3	Horizontal	339	1.97	-	34.40	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU 8_4TX

6105MHz_TX

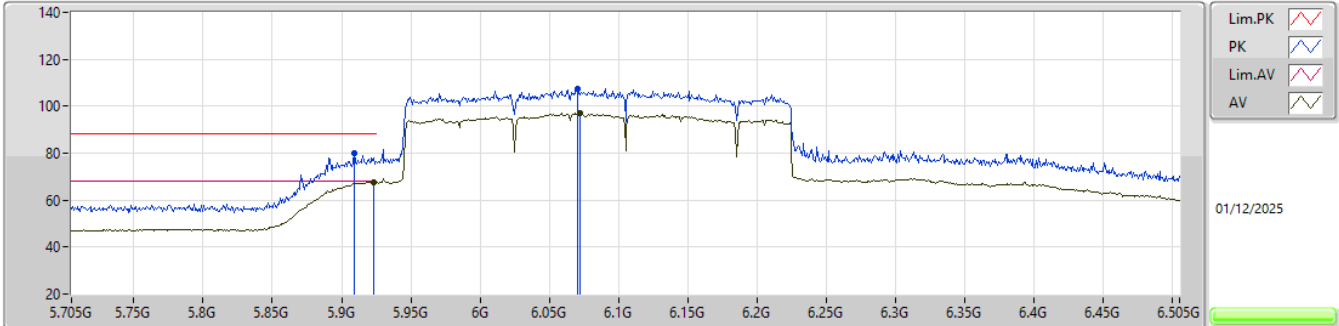


EUT_Y_4TX
Setting 91
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.909G	80.08	88.20	-8.12	67.96	3	Vertical	-0	1.80	-	34.12	8.16	30.16			
RMS	5.9234G	67.80	68.20	-0.40	55.66	3	Vertical	-0	1.80	-	34.15	8.15	30.16			
PK	6.0706G	107.46	Inf	-Inf	95.10	3	Vertical	-0	1.80	-	34.44	8.08	30.16			
RMS	6.0722G	97.05	Inf	-Inf	84.69	3	Vertical	-0	1.80	-	34.44	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU 8_4TX


6105MHz_TX

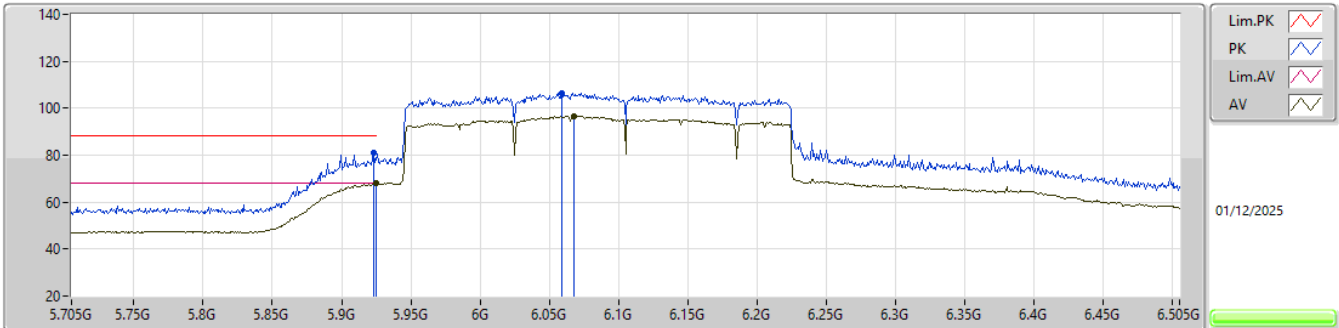EUT_Y_4TX
Setting 91
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9234G	81.26	88.20	-6.94	69.12	3	Horizontal	338	1.96	-	34.15	8.15	30.16			
RMS	5.925G	68.03	68.20	-0.17	55.89	3	Horizontal	338	1.96	-	34.15	8.15	30.16			
PK	6.0586G	106.49	Inf	-Inf	94.13	3	Horizontal	338	1.96	-	34.42	8.09	30.15			
RMS	6.0674G	96.72	Inf	-Inf	84.37	3	Horizontal	338	1.96	-	34.43	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

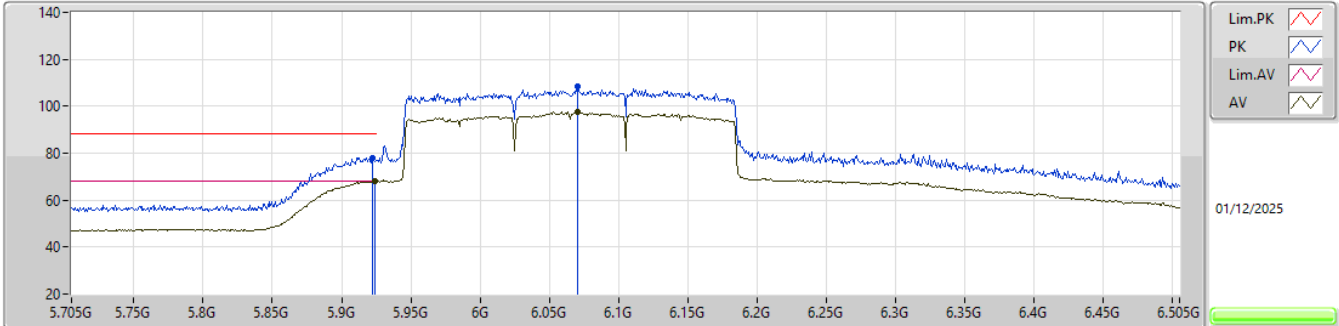


EUT_Y_4TX
Setting 90
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9226G	77.94	88.20	-10.26	65.80	3	Vertical	-0	1.80	-	34.15	8.15	30.16			
RMS	5.9242G	68.07	68.20	-0.13	55.93	3	Vertical	-0	1.80	-	34.15	8.15	30.16			
PK	6.0706G	108.48	Inf	-Inf	96.12	3	Vertical	-0	1.80	-	34.44	8.08	30.16			
RMS	6.0706G	97.40	Inf	-Inf	85.04	3	Vertical	-0	1.80	-	34.44	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

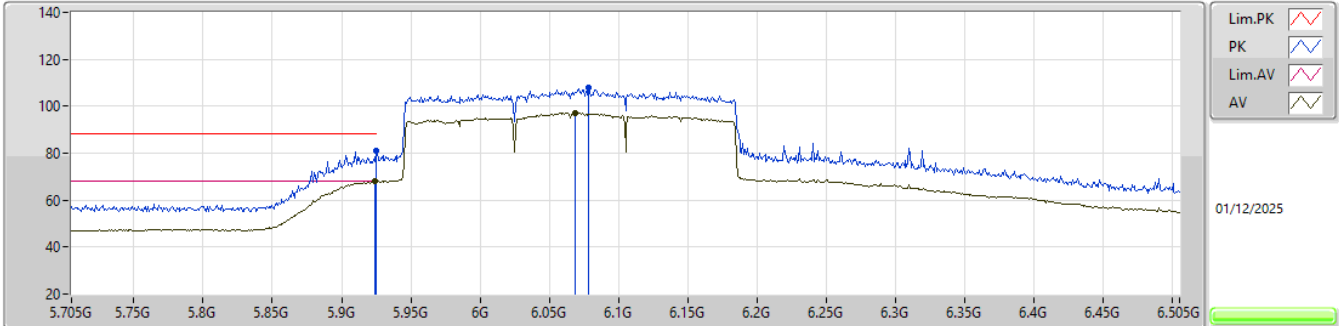


EUT_Y_4TX
Setting 90
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	81.13	88.20	-7.07	68.99	3	Horizontal	337	1.95	-	34.15	8.15	30.16			
RMS	5.9242G	68.13	68.20	-0.07	55.99	3	Horizontal	337	1.95	-	34.15	8.15	30.16			
PK	6.0786G	107.75	Inf	-Inf	95.37	3	Horizontal	337	1.95	-	34.46	8.08	30.16			
RMS	6.069G	97.16	Inf	-Inf	84.80	3	Horizontal	337	1.95	-	34.44	8.08	30.16			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX


6105MHz_TX

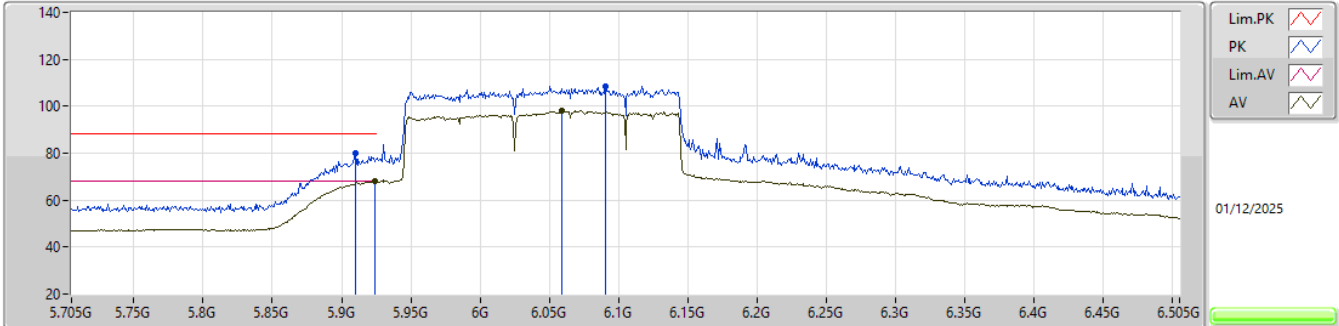EUT_Y_4TX
Setting 88
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9098G	79.84	88.20	-8.36	67.72	3	Vertical	360	1.80	-	34.12	8.16	30.16			
RMS	5.9242G	67.85	68.20	-0.35	55.71	3	Vertical	360	1.80	-	34.15	8.15	30.16			
PK	6.0906G	108.46	Inf	-Inf	96.08	3	Vertical	360	1.80	-	34.48	8.07	30.17			
RMS	6.0586G	98.08	Inf	-Inf	85.72	3	Vertical	360	1.80	-	34.42	8.09	30.15			

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX

6105MHz_TX

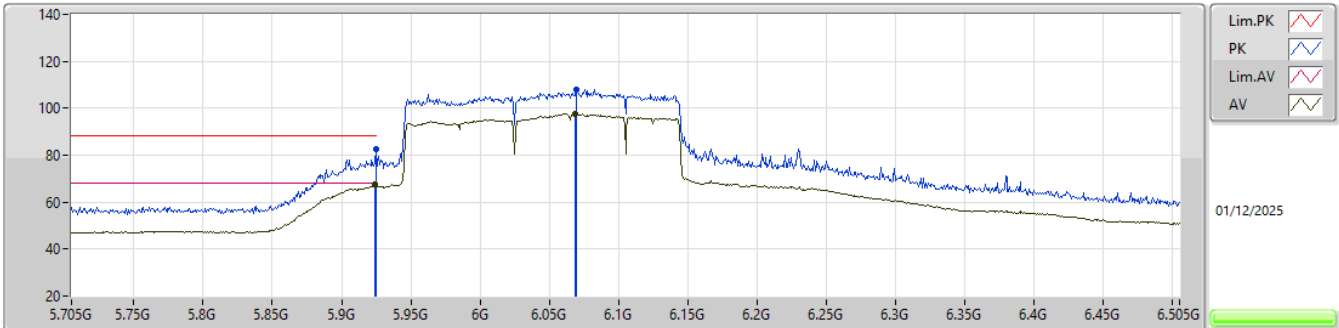EUT_Y_4TX
Setting 88
02-D-J-11-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	82.61	88.20	-5.59	70.47	3	Horizontal	336	2.05	-	34.15	8.15	30.16			
RMS	5.9242G	67.41	68.20	-0.79	55.27	3	Horizontal	336	2.05	-	34.15	8.15	30.16			
PK	6.0698G	107.86	Inf	-Inf	95.50	3	Horizontal	336	2.05	-	34.44	8.08	30.16			
RMS	6.069G	97.62	Inf	-Inf	85.26	3	Horizontal	336	2.05	-	34.44	8.08	30.16			


Test Mode: Mode 1

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX

MASK

5985MHz_TX

08/12/2025

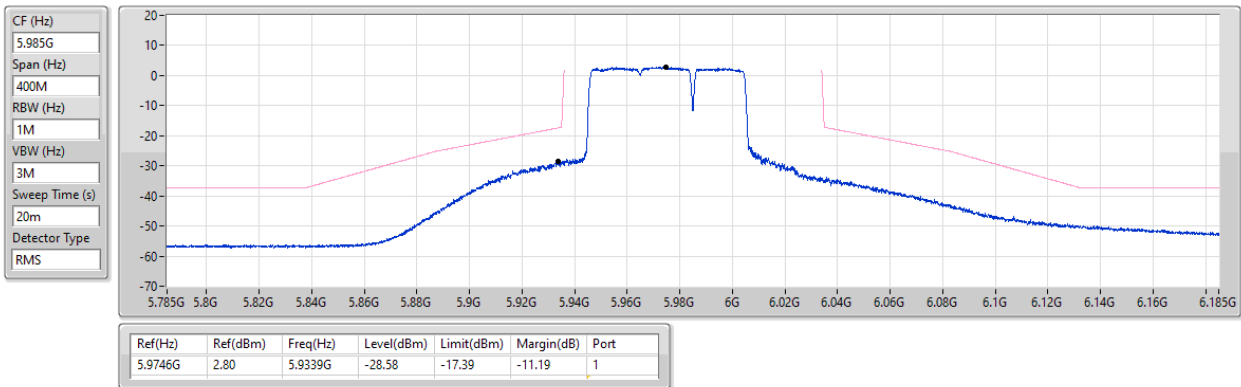


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX

MASK

6025MHz_TX

11/11/2025

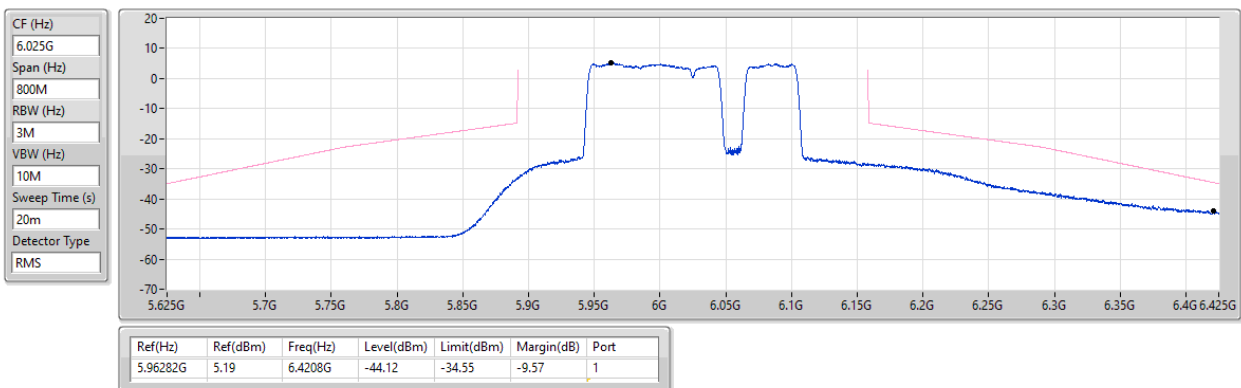


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX

MASK

6025MHz_TX

11/11/2025

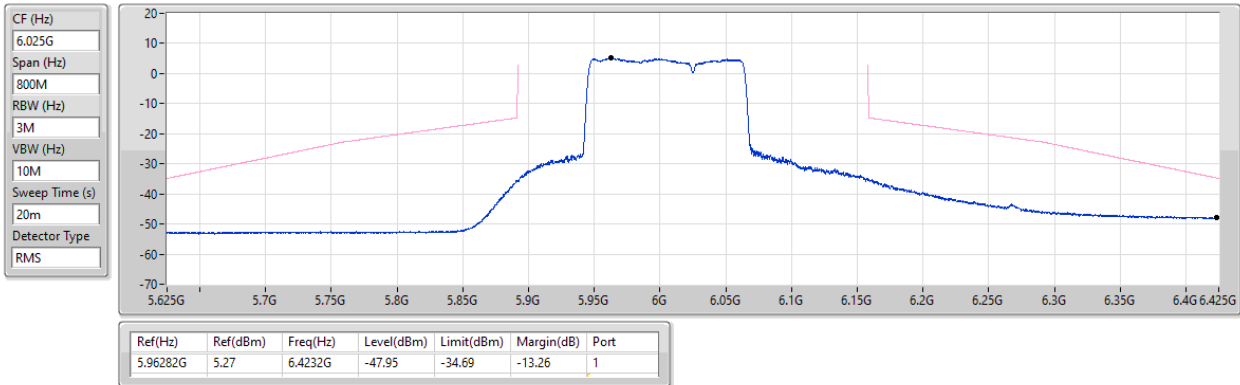


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX

MASK

6105MHz_TX

11/11/2025

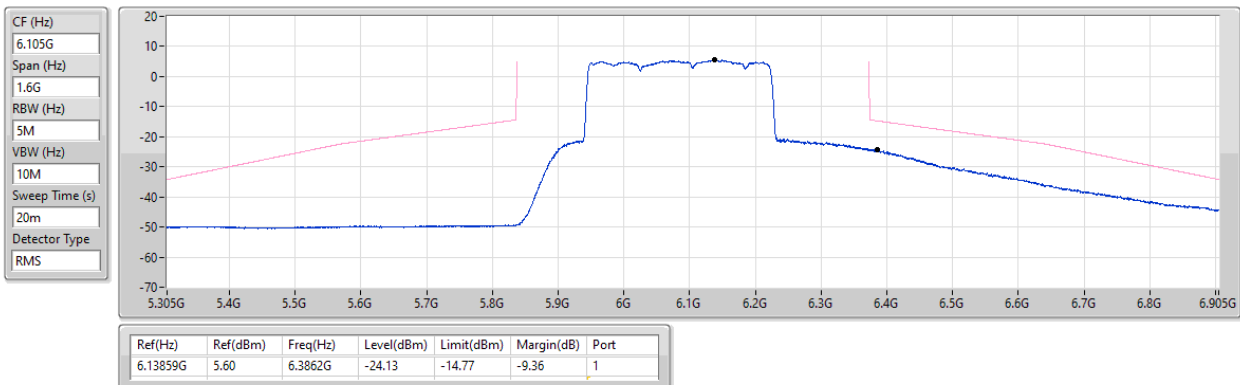


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX

MASK

6105MHz_TX

11/11/2025

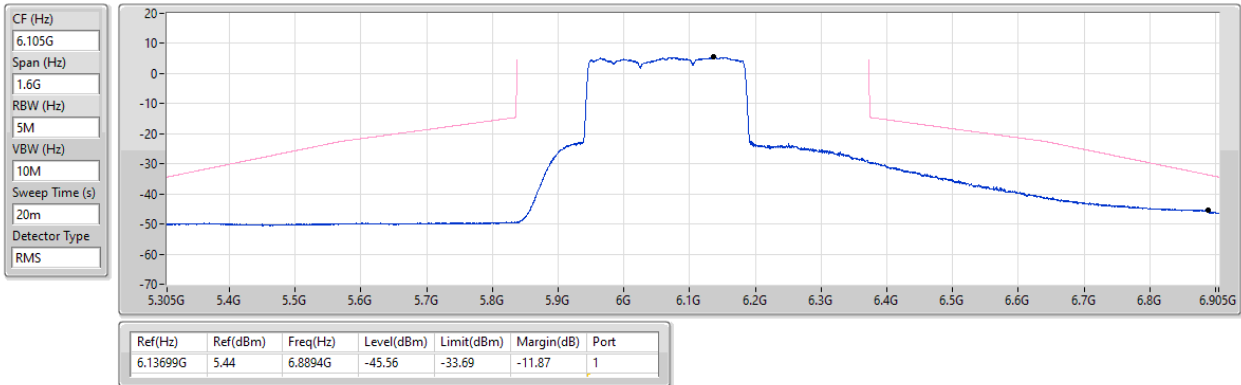


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX

MASK

6105MHz_TX

11/11/2025

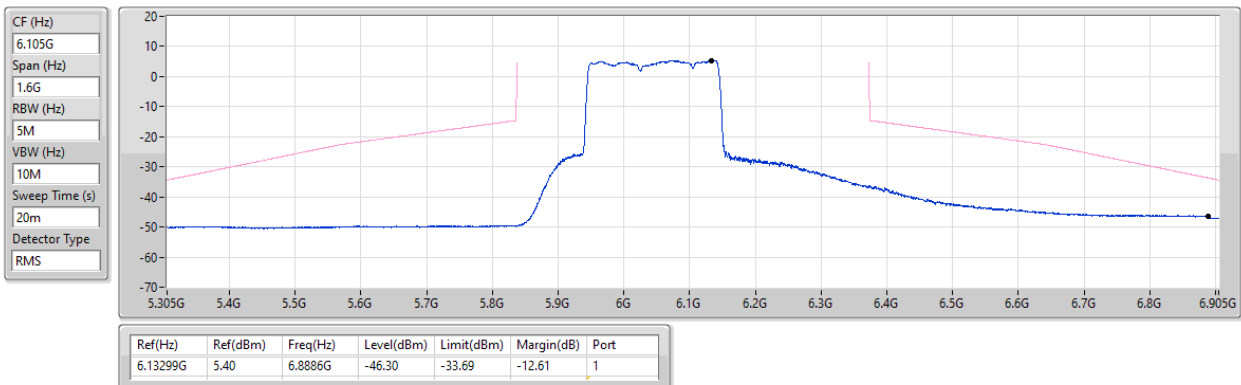


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU 4_2TX

MASK

5985MHz_TX

08/12/2025

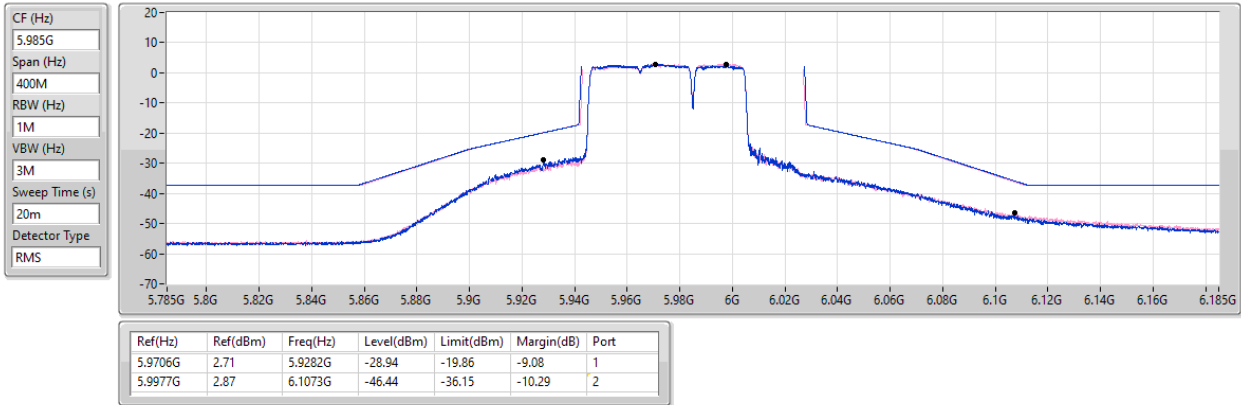


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU 6_2TX

MASK

6025MHz_TX

11/11/2025

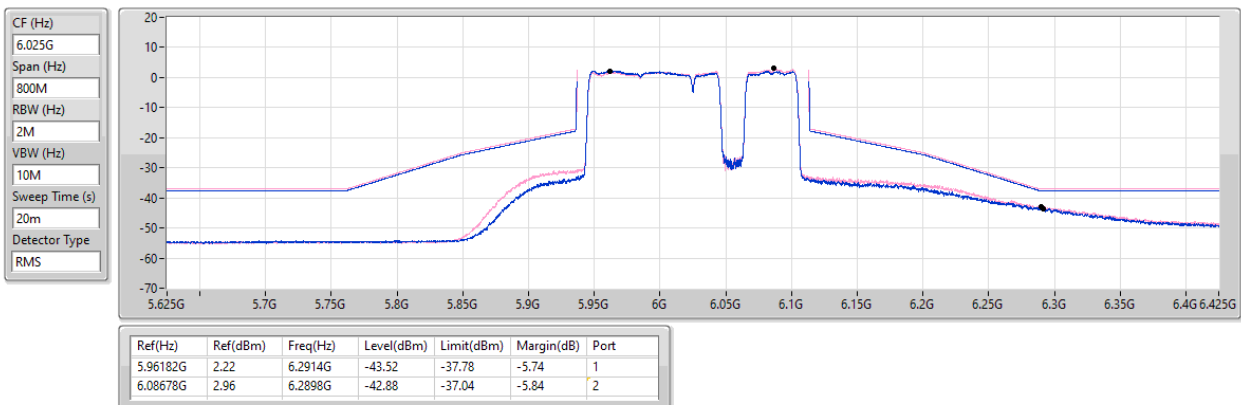


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX

MASK

6025MHz_TX

11/11/2025

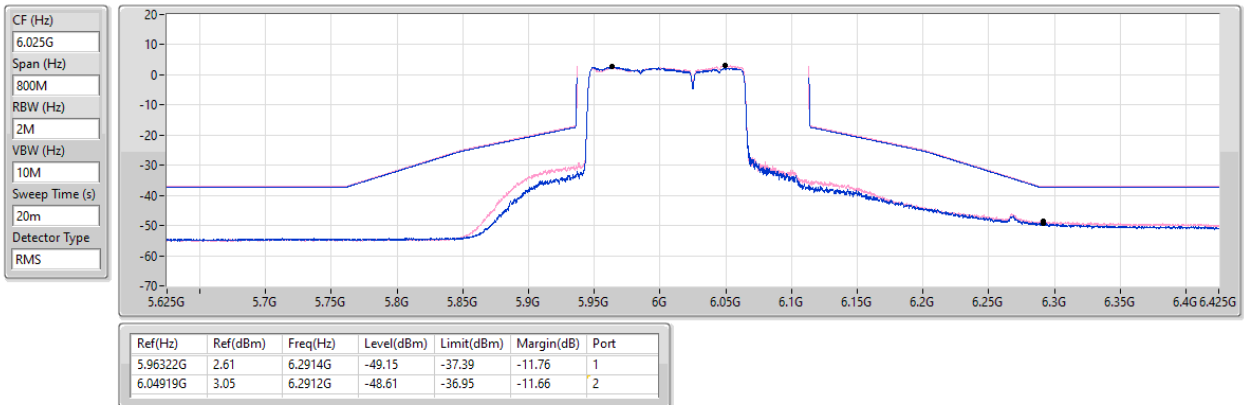


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX

MASK

6105MHz_TX

11/11/2025

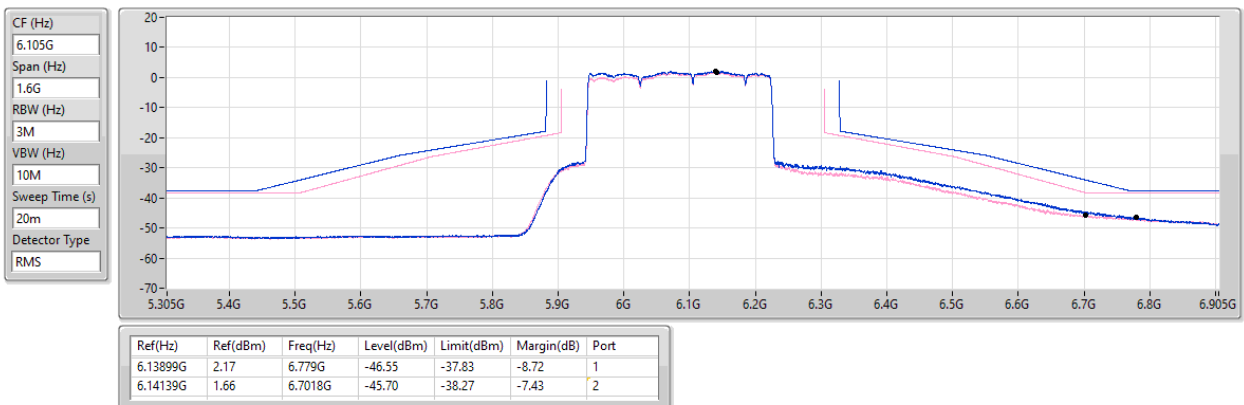


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX

MASK

6105MHz_TX

11/11/2025

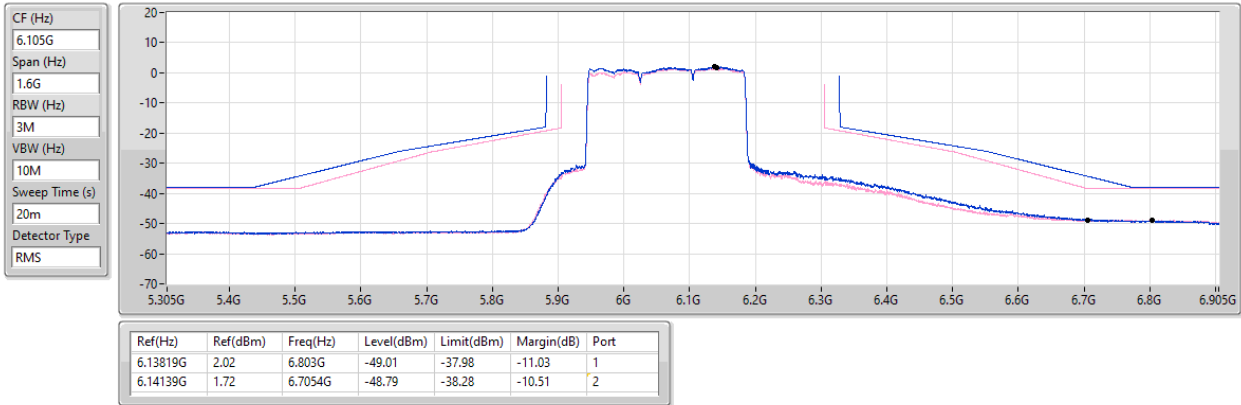


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX

MASK

6105MHz_TX

11/11/2025

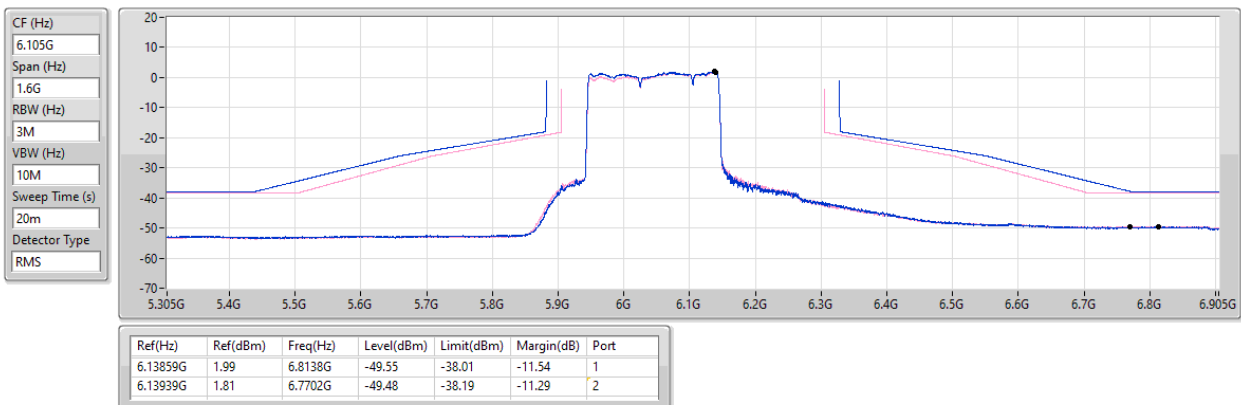


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU_4_4TX

MASK

5985MHz_TX

09/12/2025

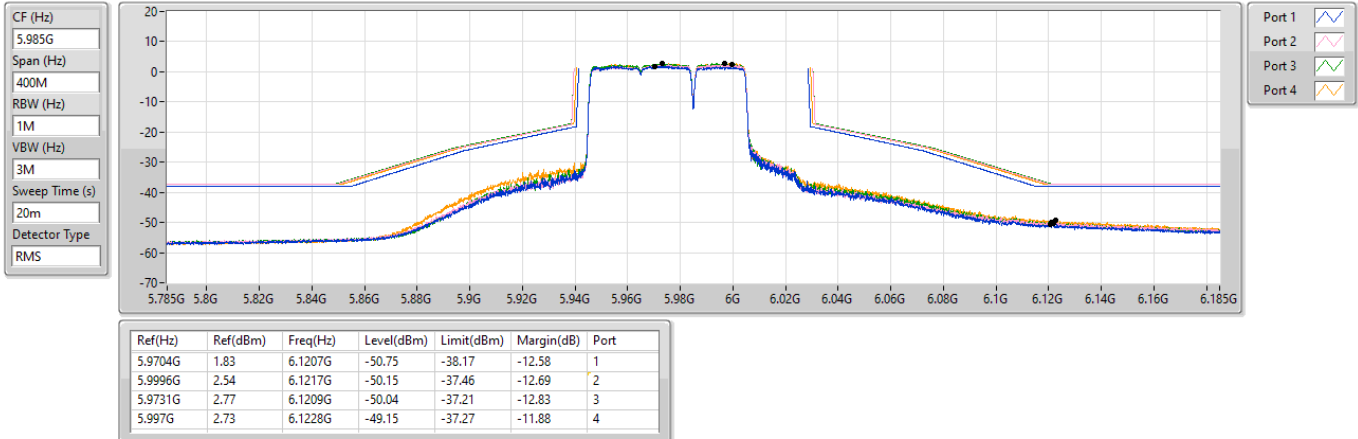


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU_6_4TX

MASK

6025MHz_TX

12/11/2025

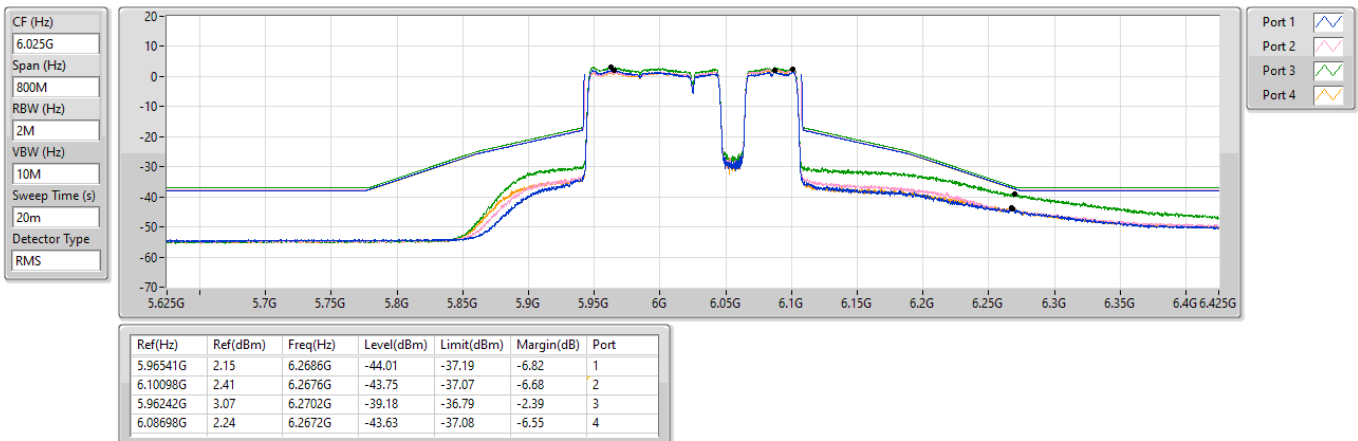


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU_4_4TX

MASK

6025MHz_TX

12/11/2025

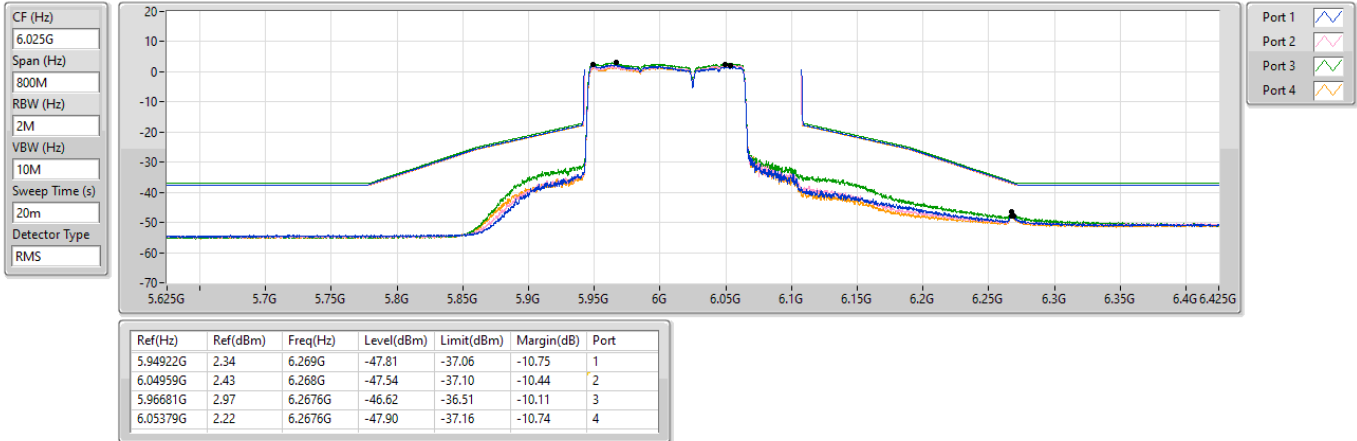


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU_8_4TX

MASK

6105MHz_TX

12/11/2025

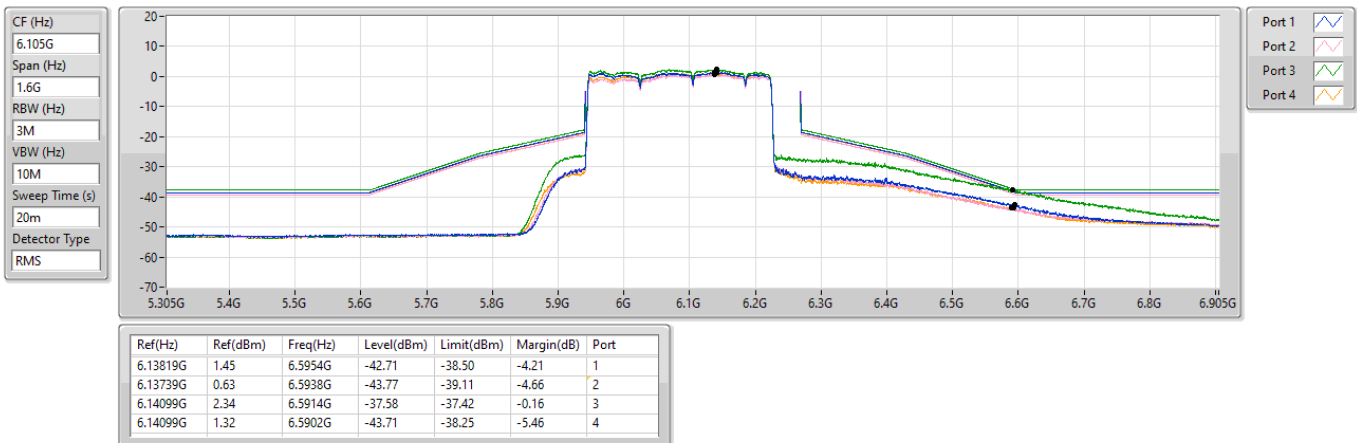


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

MASK

6105MHz_TX

12/11/2025

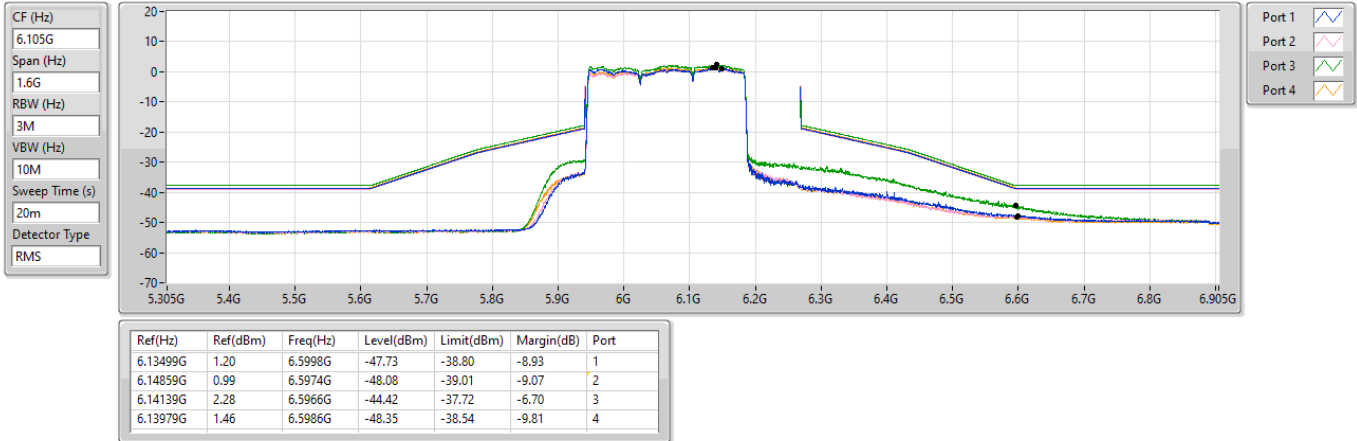


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX

MASK

6105MHz_TX

12/11/2025

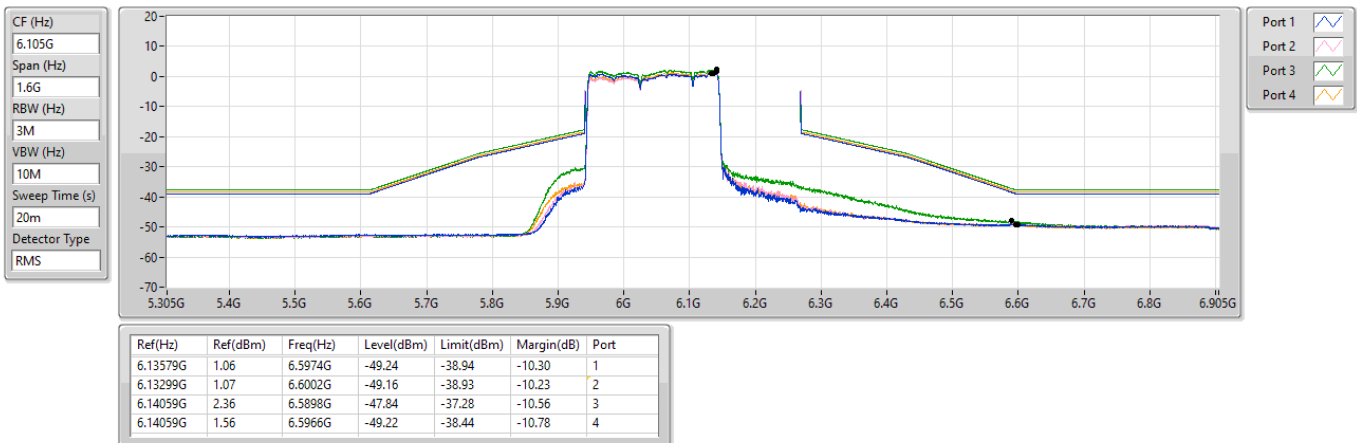


5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU_4_4TX

MASK

5985MHz_TX

08/12/2025

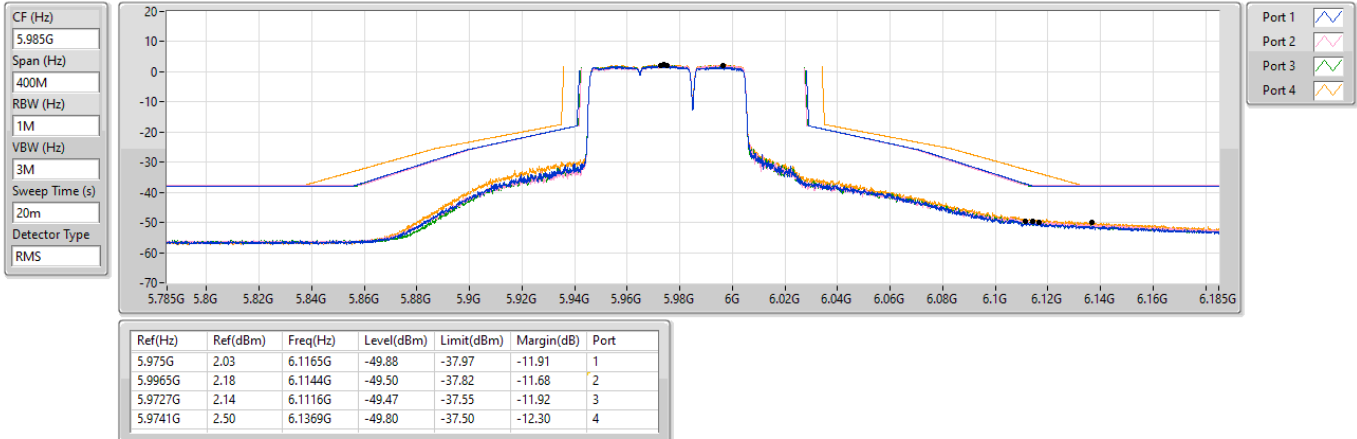


5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU_6_4TX

MASK

6025MHz_TX

12/11/2025

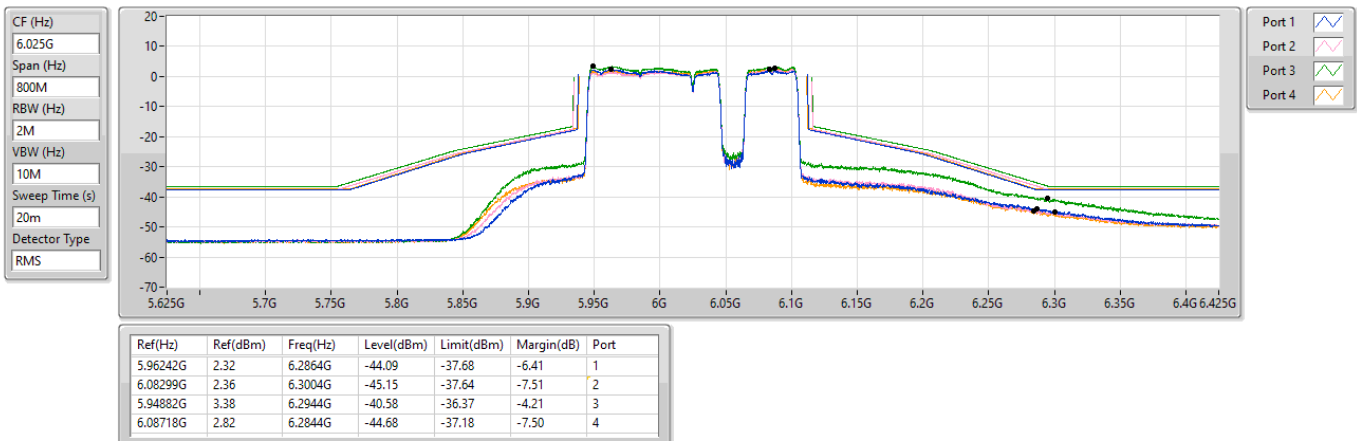


5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU_4_4TX

MASK

6025MHz_TX

12/11/2025

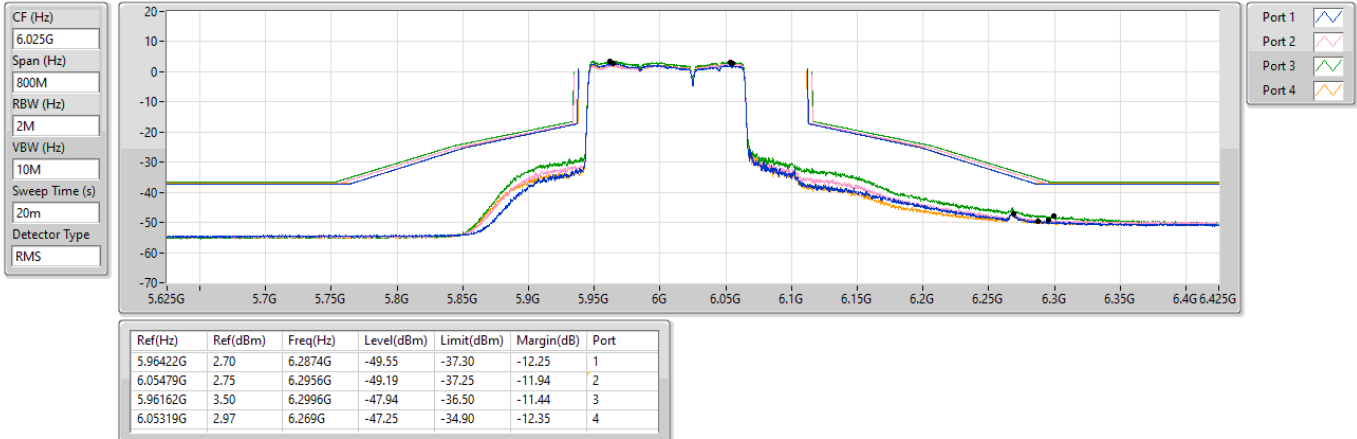


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU_8_4TX

MASK

6105MHz_TX

12/11/2025

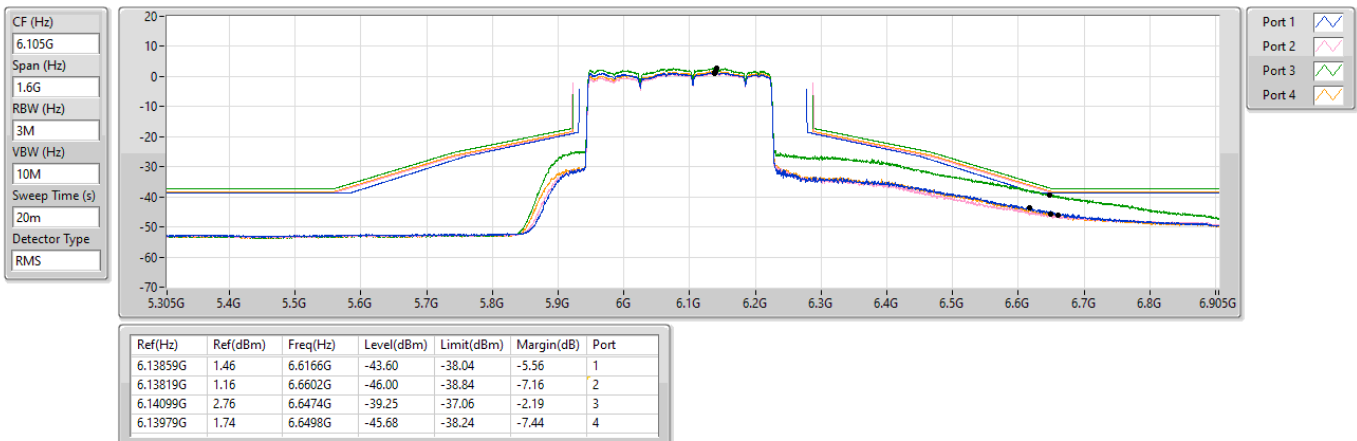

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX

MASK

6105MHz_TX

12/11/2025

CF (Hz)
6.105G


Span (Hz)
1.6G

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
20m

Detector Type
RMS

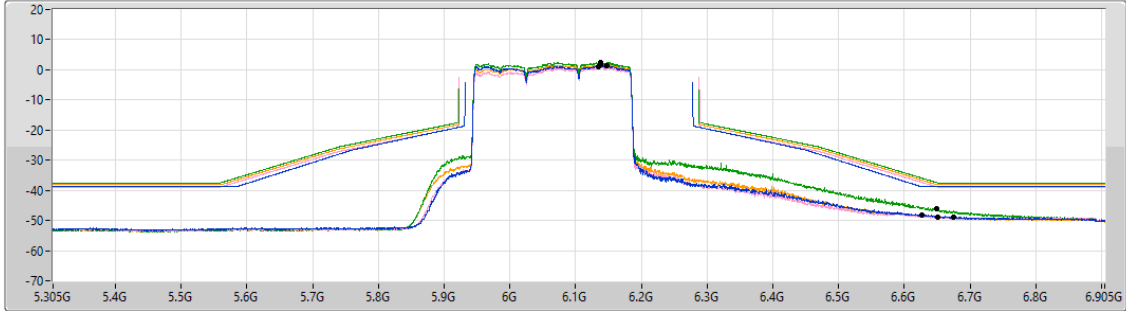

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.14699G	1.34	6.6266G	-48.08	-38.66	-9.42	1
6.13499G	0.84	6.6754G	-48.92	-39.16	-9.76	2
6.13739G	2.51	6.6498G	-46.13	-37.47	-8.66	3
6.13739G	1.83	6.651G	-48.79	-38.17	-10.62	4

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX

MASK

6105MHz_TX

12/11/2025

CF (Hz)
6.105G


Span (Hz)
1.6G

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
20m

Detector Type
RMS

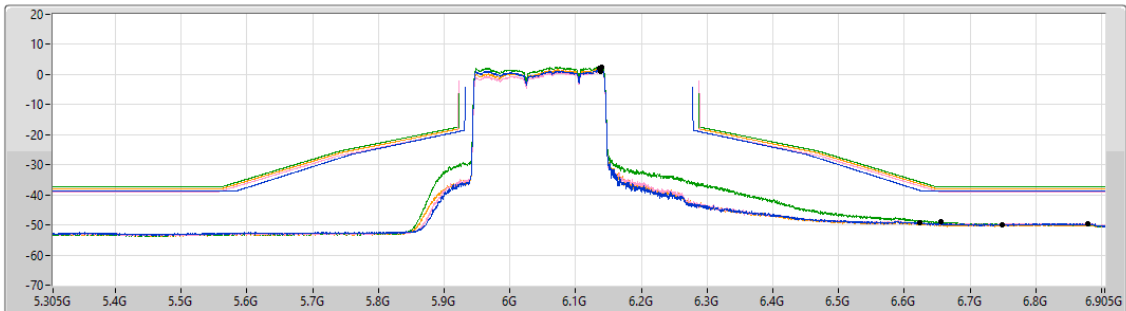

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.13739G	1.46	6.6242G	-49.26	-38.54	-10.72	1
6.13739G	0.95	6.879G	-49.46	-39.05	-10.41	2
6.14019G	2.56	6.655G	-48.99	-37.44	-11.55	3
6.13699G	1.92	6.749G	-49.83	-38.08	-11.75	4


Test Mode: Mode 2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_1TX

MASK

5985MHz_TX

12/11/2025

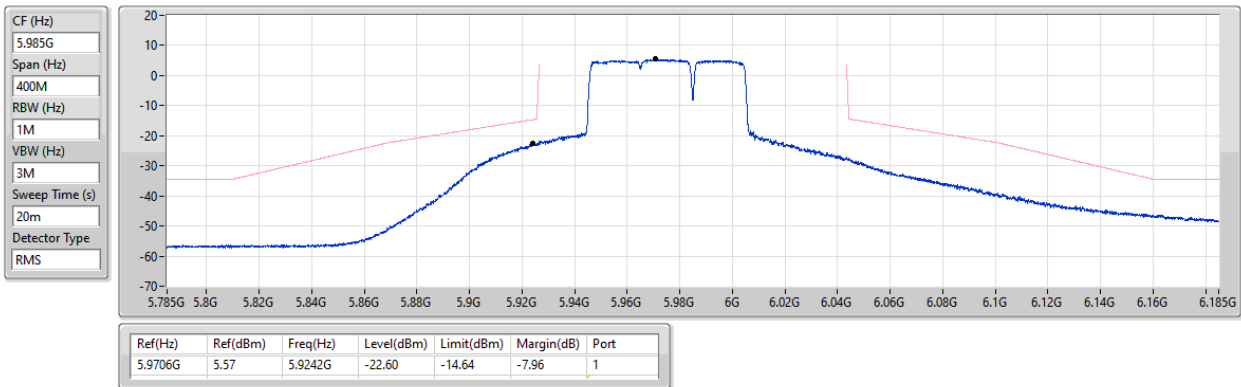


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_1TX

MASK

6025MHz_TX

12/11/2025

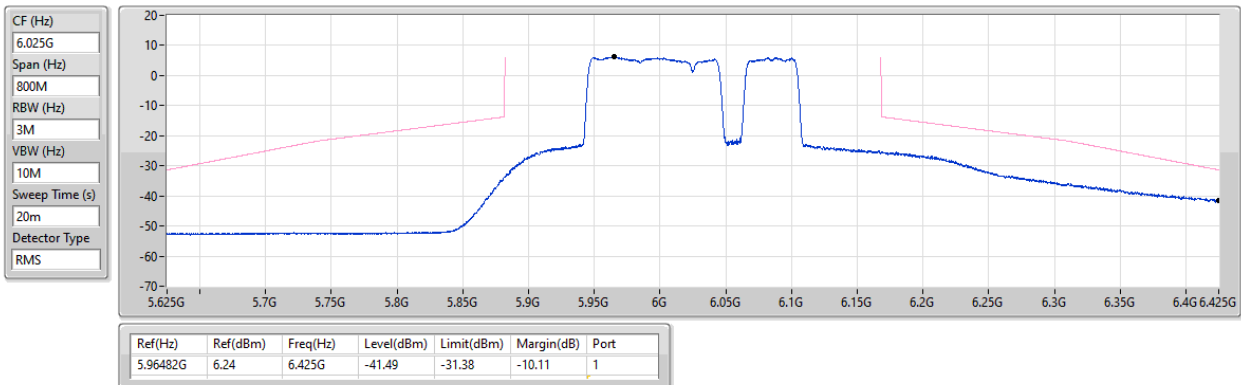


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_1TX

MASK

6025MHz_TX

12/11/2025

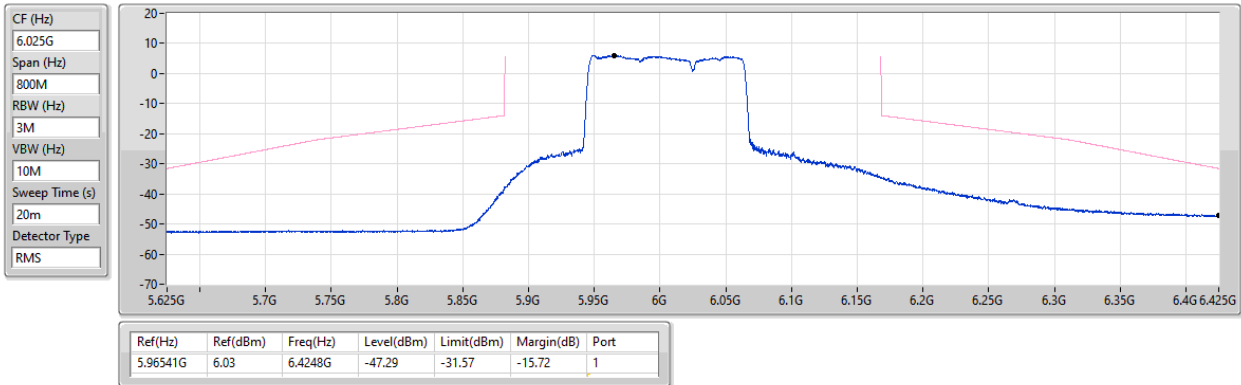


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_1TX

MASK

6105MHz_TX

12/11/2025

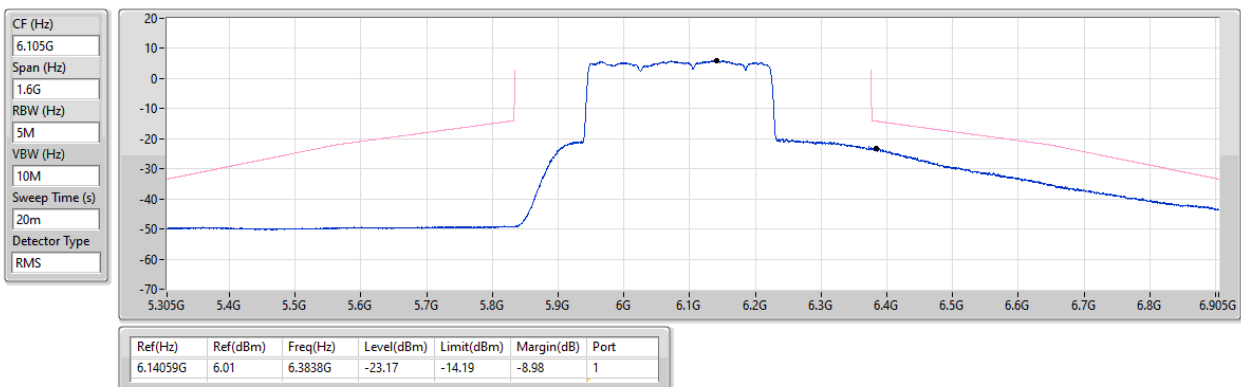


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_1TX

MASK

6105MHz_TX

12/11/2025

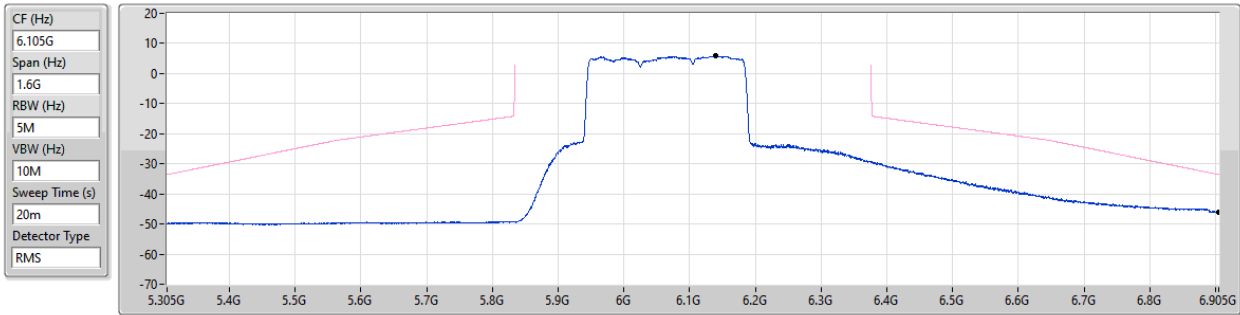


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_1TX

MASK

6105MHz_TX

12/11/2025

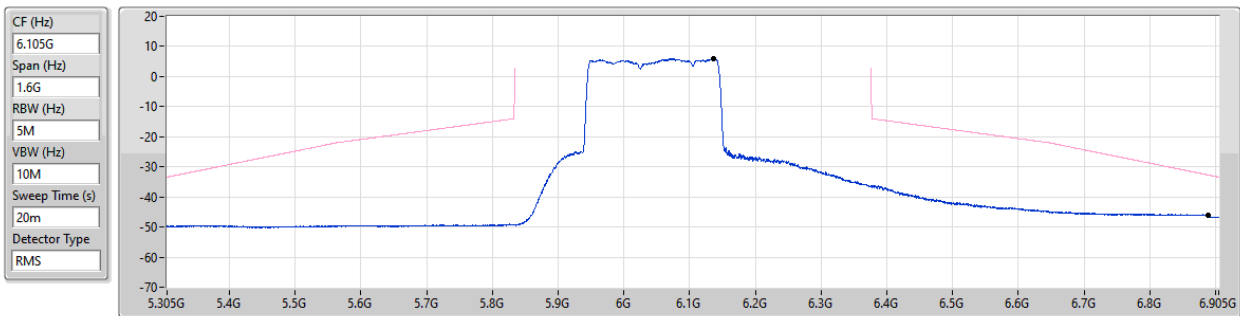


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0),RU484+RU242 MRU_4_2TX

MASK

5985MHz_TX

12/11/2025

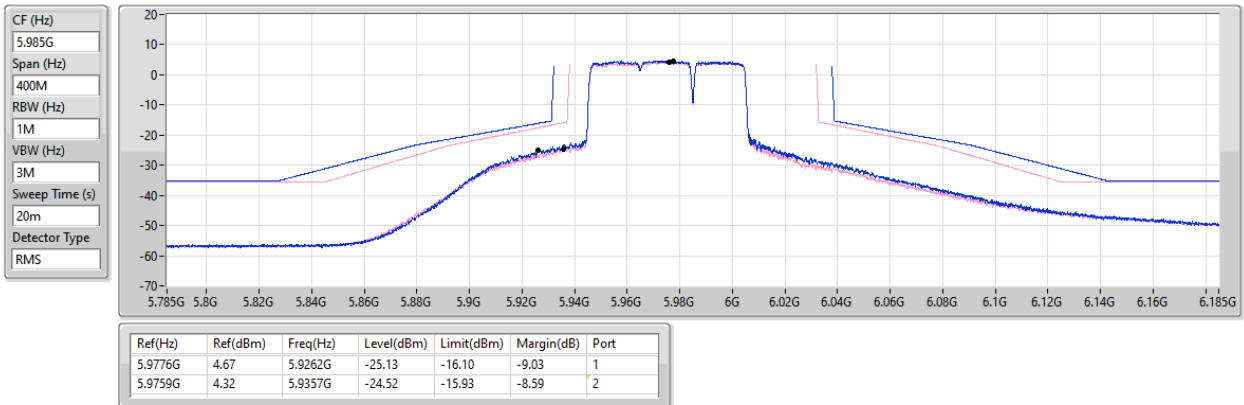


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484+RU242 MRU_6_2TX

MASK

6025MHz_TX

12/11/2025

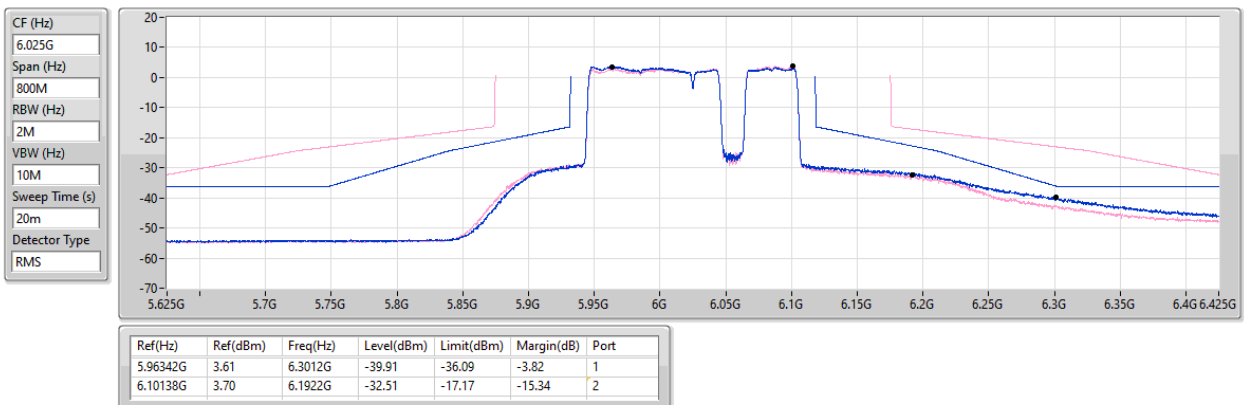


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0),RU996+RU484 MRU 4_2TX

MASK

6025MHz_TX

12/11/2025

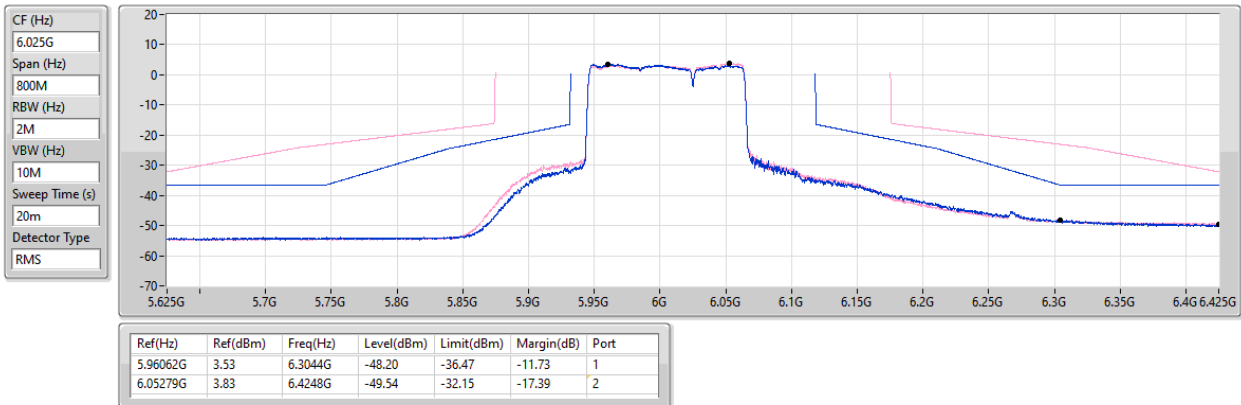


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996+RU484 MRU 8_2TX

MASK

6105MHz_TX

12/11/2025

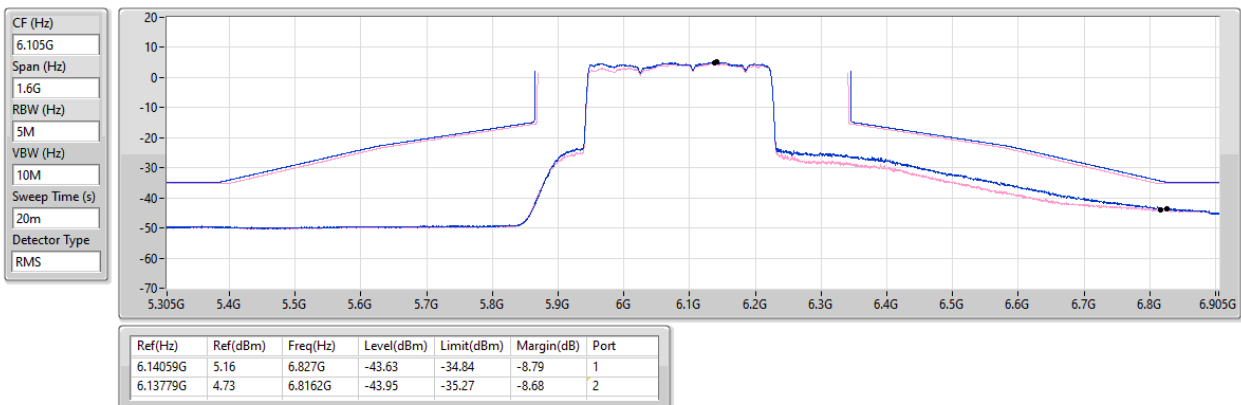


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),3xRU996 MRU 4_2TX

MASK

6105MHz_TX

12/11/2025

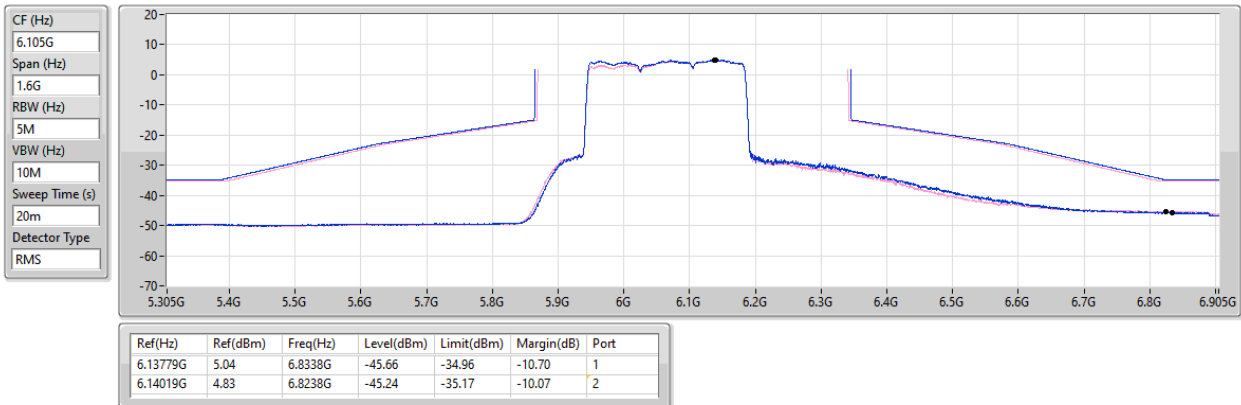


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0),2xRU996+RU484 MRU 6_2TX

MASK

6105MHz_TX

12/11/2025

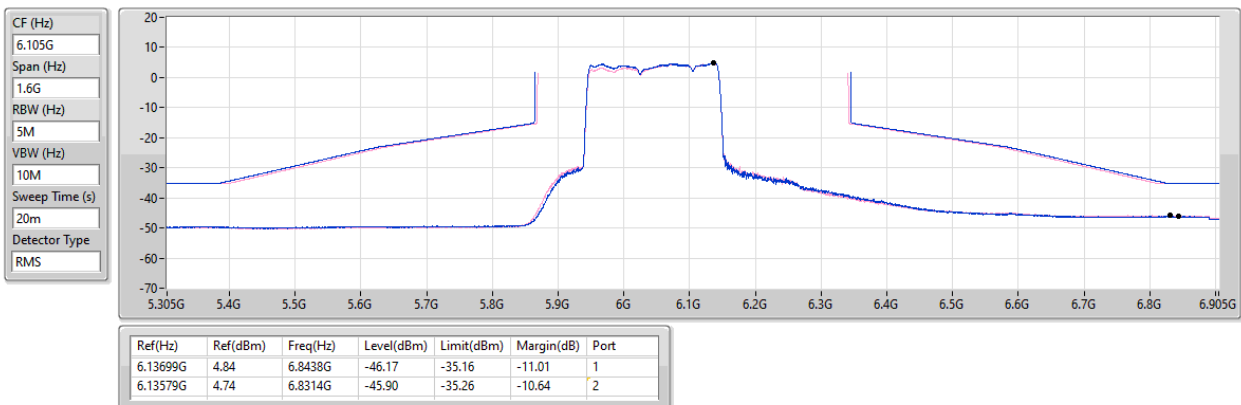


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU_4_4TX

MASK

5985MHz_TX

08/12/2025

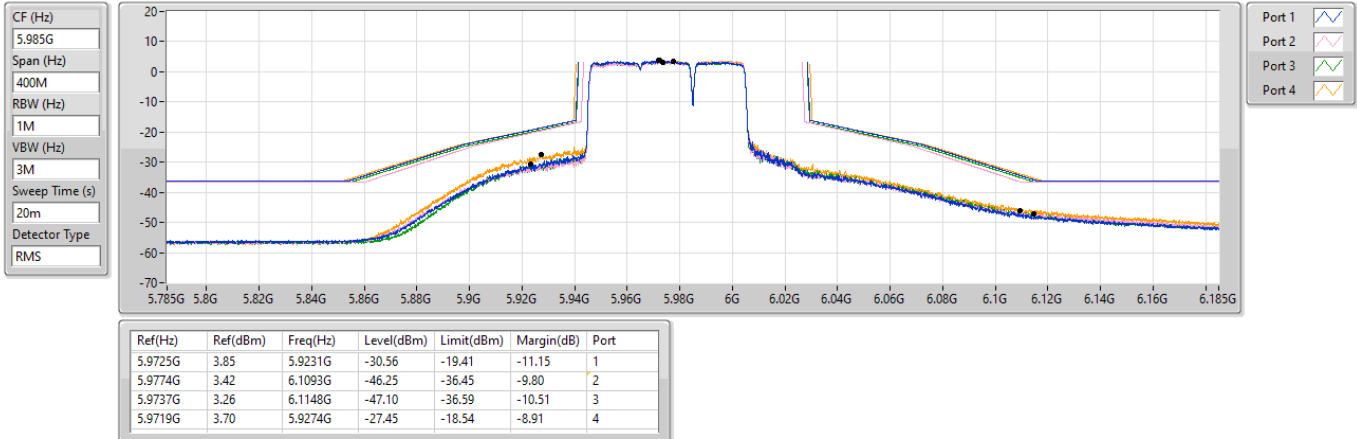


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU_6_4TX

MASK

6025MHz_TX

12/11/2025

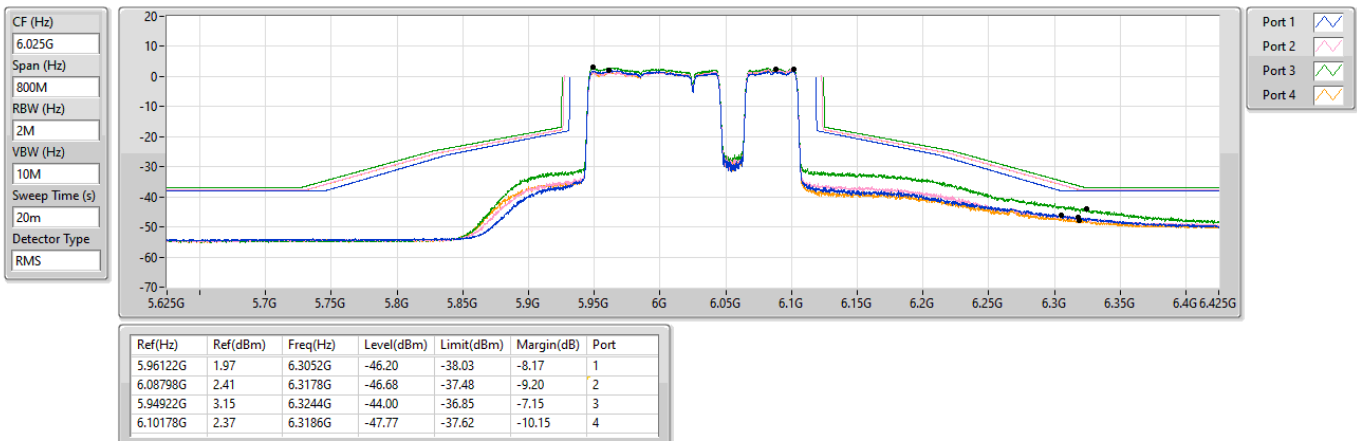


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU_4_4TX

MASK

6025MHz_TX

12/11/2025

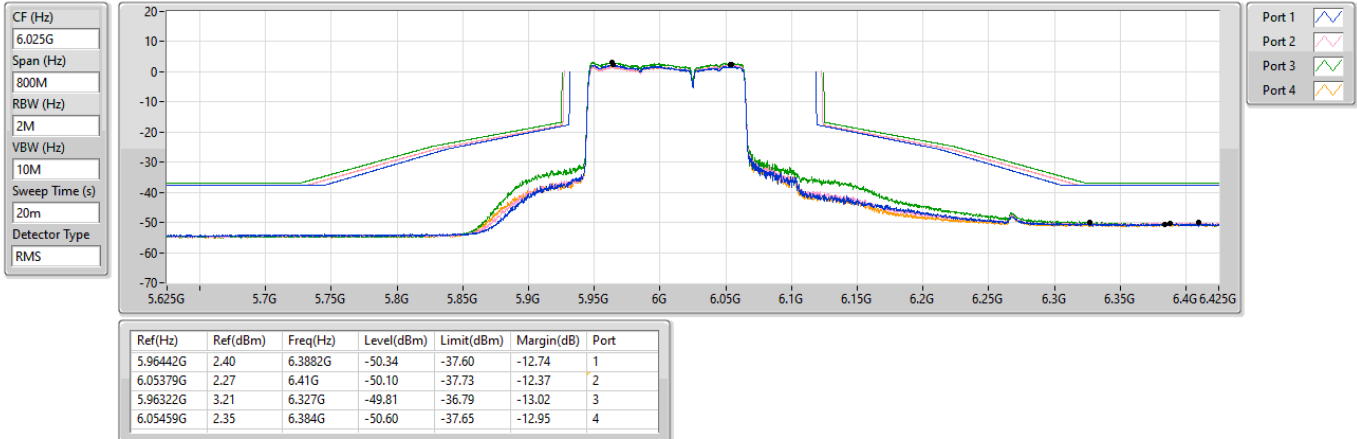


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU_8_4TX

MASK

6105MHz_TX

12/11/2025

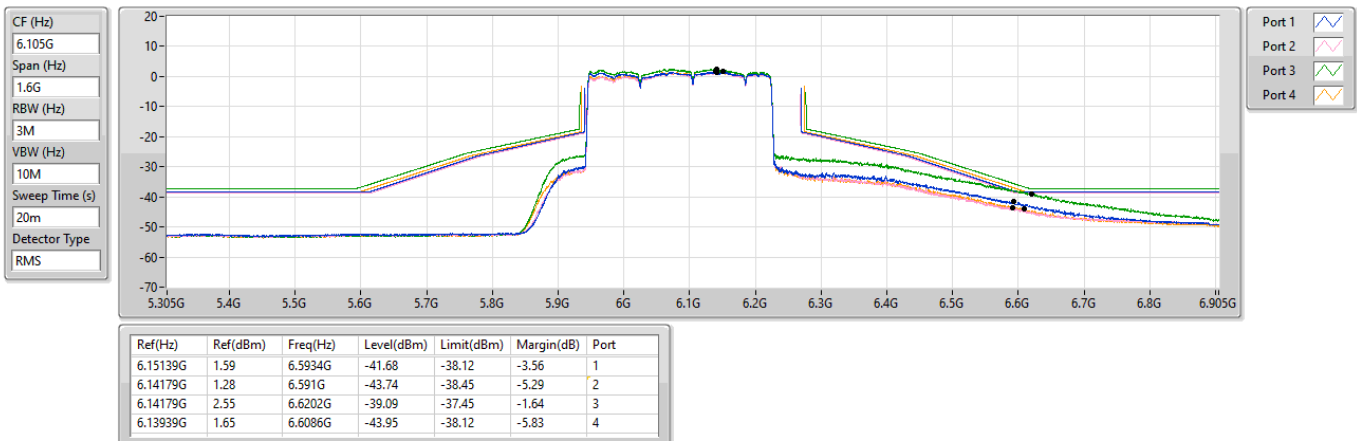


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

MASK

6105MHz_TX

12/11/2025

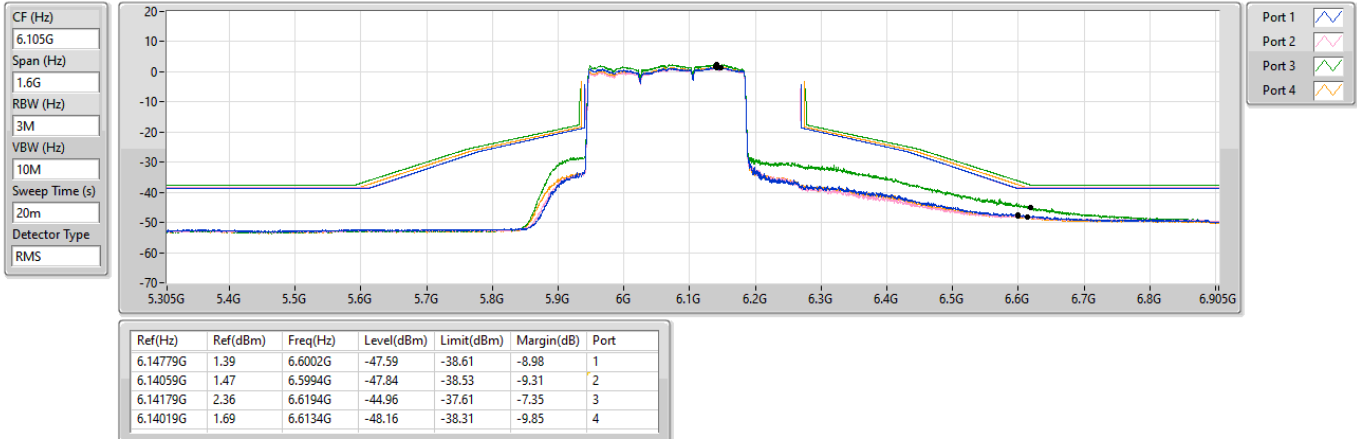


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX

MASK

6105MHz_TX

12/11/2025

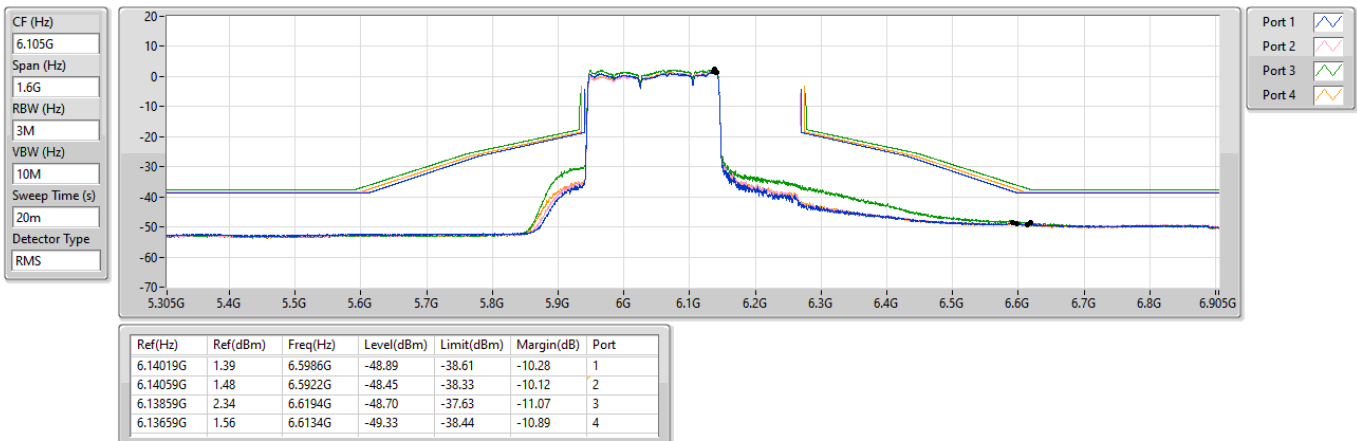


5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0),RU484+RU242 MRU_4_4TX

MASK

5985MHz_TX

12/11/2025

CF (Hz)
5.985G
Span (Hz)
400M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

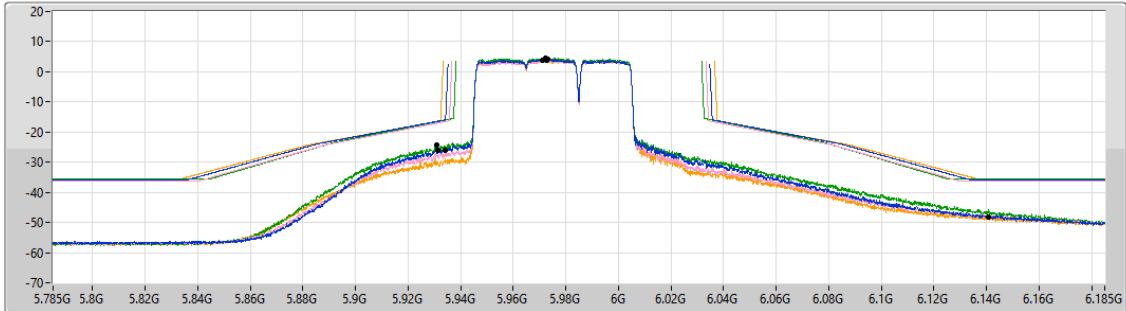

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.9731G	4.08	5.9315G	-25.96	-16.38	-9.58	1
5.9711G	3.71	5.9341G	-26.22	-16.56	-9.66	2
5.9723G	4.53	5.931G	-24.23	-16.58	-7.65	3
5.9726G	3.69	6.1407G	-48.16	-36.31	-11.85	4


5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484+RU242 MRU_6_4TX

MASK

6025MHz_TX

12/11/2025

CF (Hz)
6.025G
Span (Hz)
800M
RBW (Hz)
2M
VBW (Hz)
10M
Sweep Time (s)
20m
Detector Type
RMS

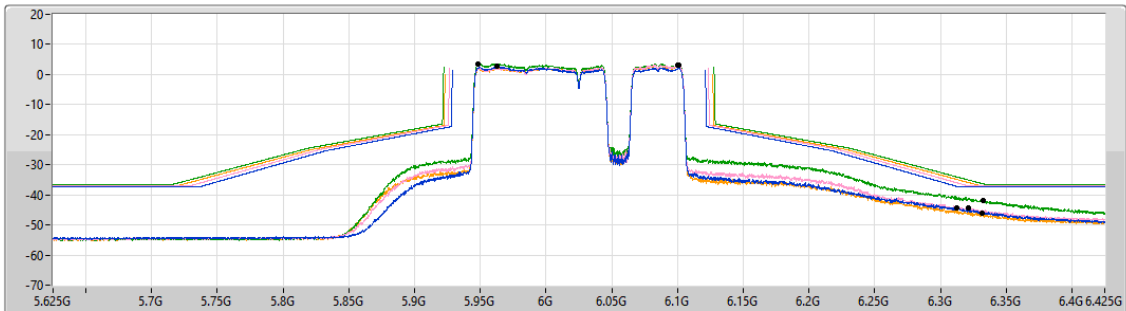


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.96282G	2.68	6.3122G	-44.44	-37.17	-7.27	1
6.10018G	3.10	6.3214G	-44.44	-36.90	-7.54	2
5.94802G	3.55	6.3324G	-41.72	-36.35	-5.37	3
6.10058G	3.07	6.3318G	-46.15	-36.93	-9.22	4

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0),RU996+RU484 MRU_4_4TX

MASK

6025MHz_TX

12/11/2025

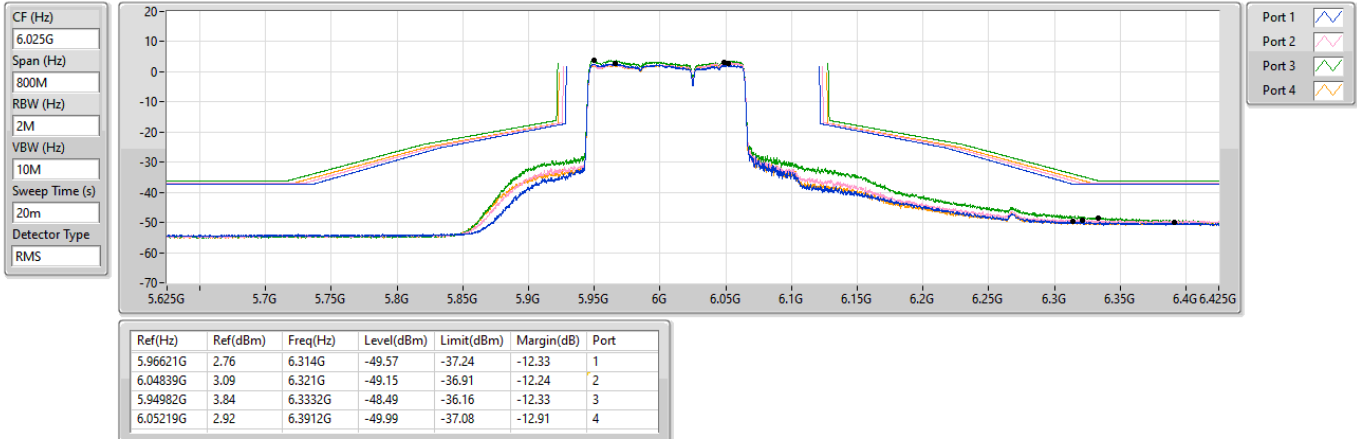


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996+RU484 MRU_8_4TX

MASK

6105MHz_TX

12/11/2025

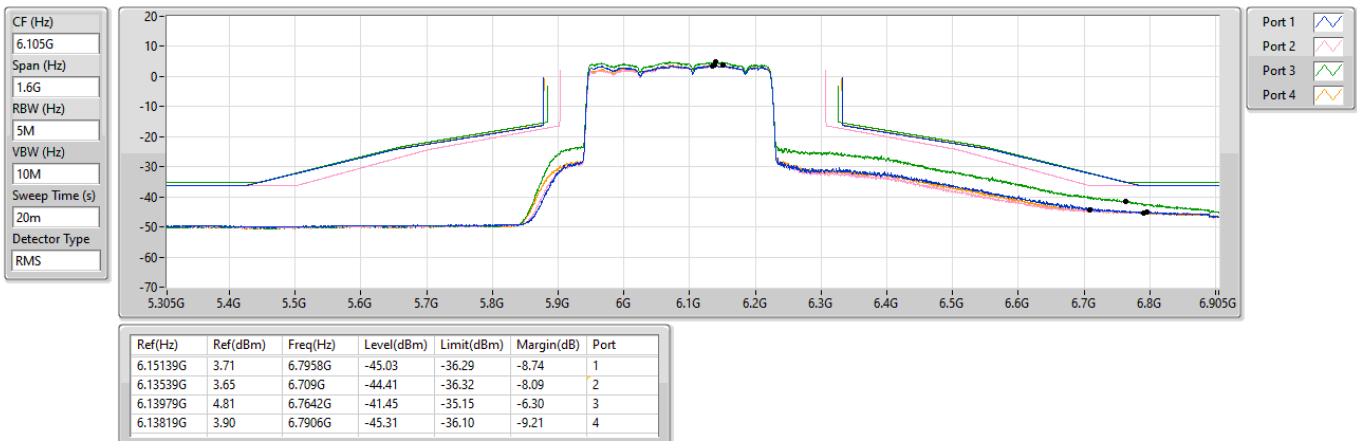


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),3xRU996 MRU 4_4TX

MASK

6105MHz_TX

12/11/2025

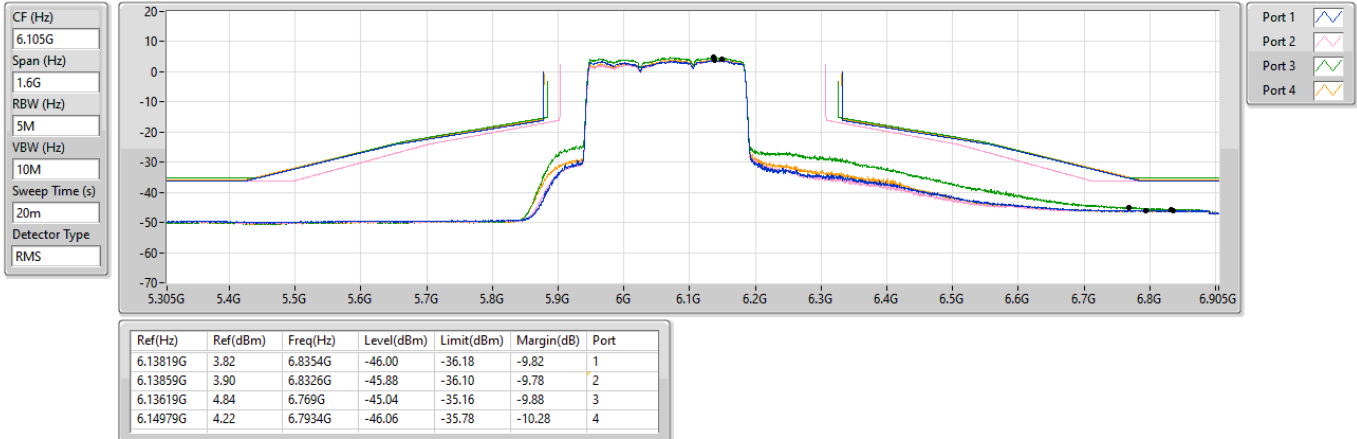

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0),2xRU996+RU484 MRU 6_4TX

MASK

6105MHz_TX

12/11/2025

