


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5180MHz

17/09/2025

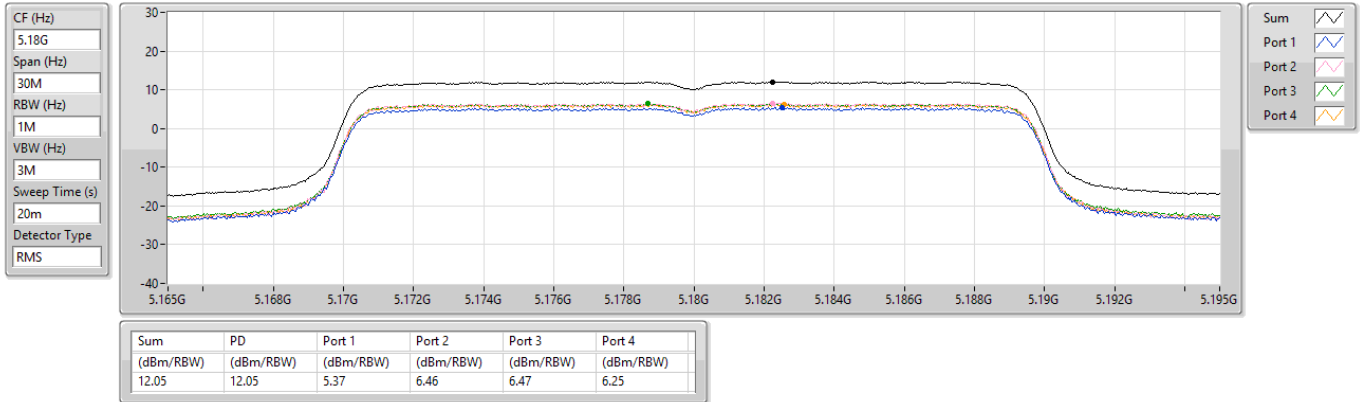


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5200MHz

17/09/2025

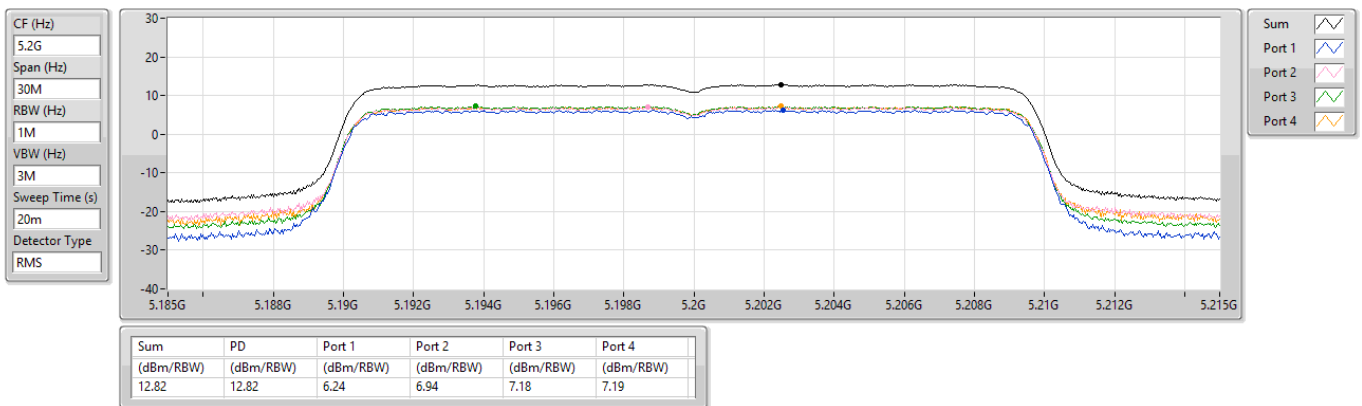


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5240MHz

17/09/2025

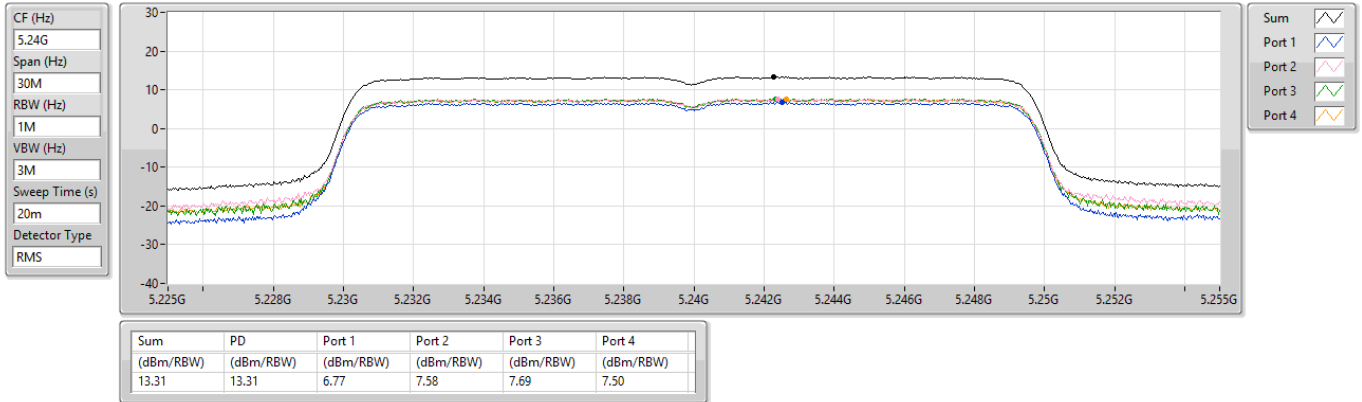


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5745MHz

18/09/2025

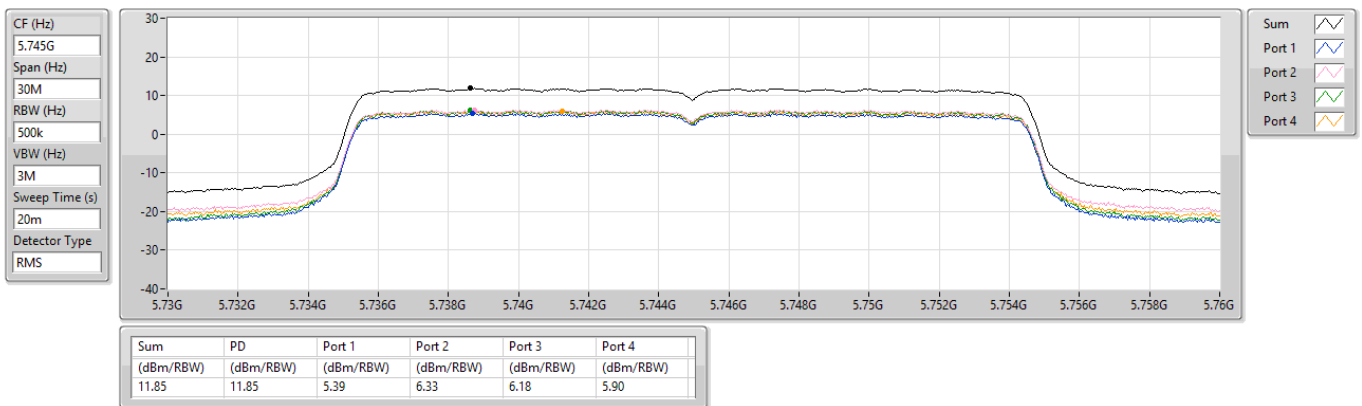


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5785MHz

18/09/2025

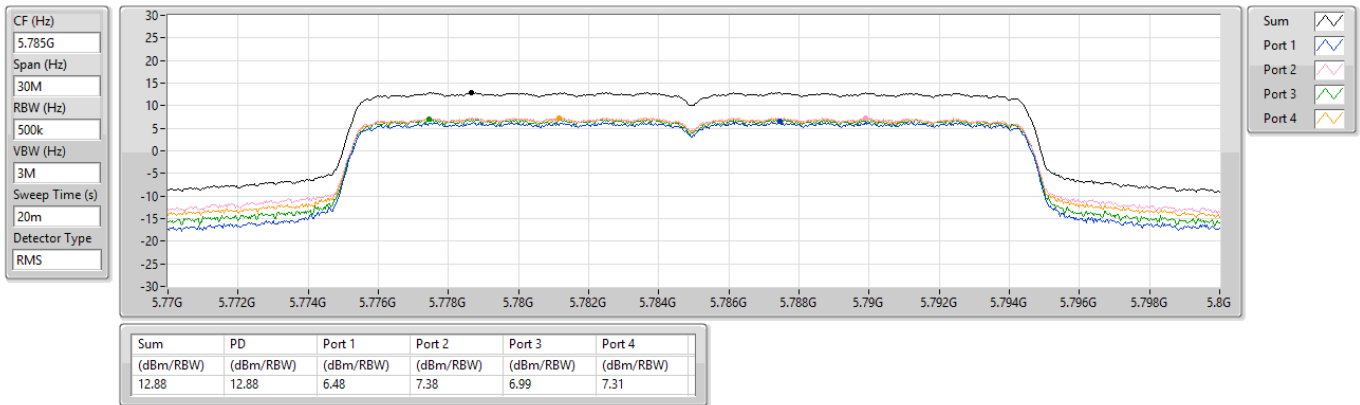


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5825MHz

18/09/2025

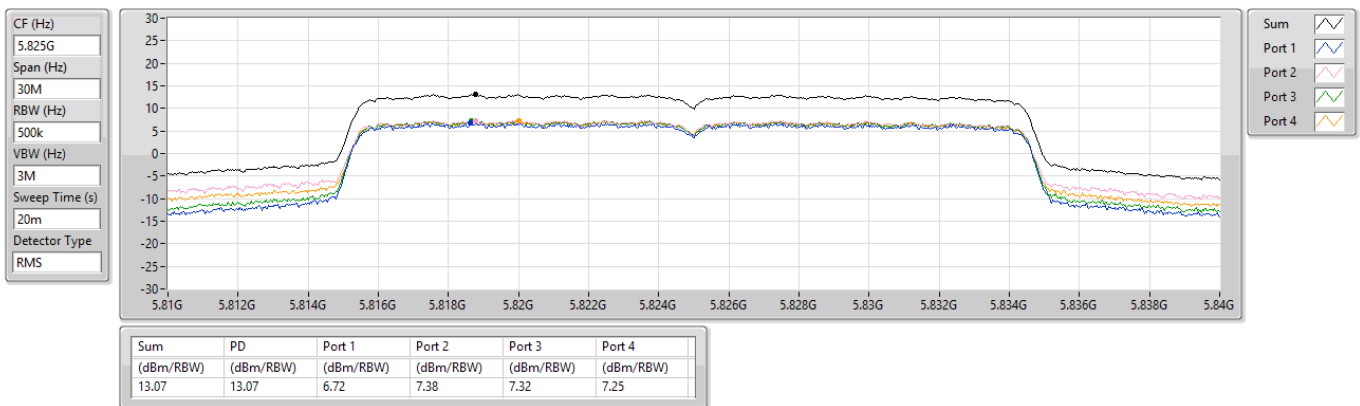


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5190MHz

18/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

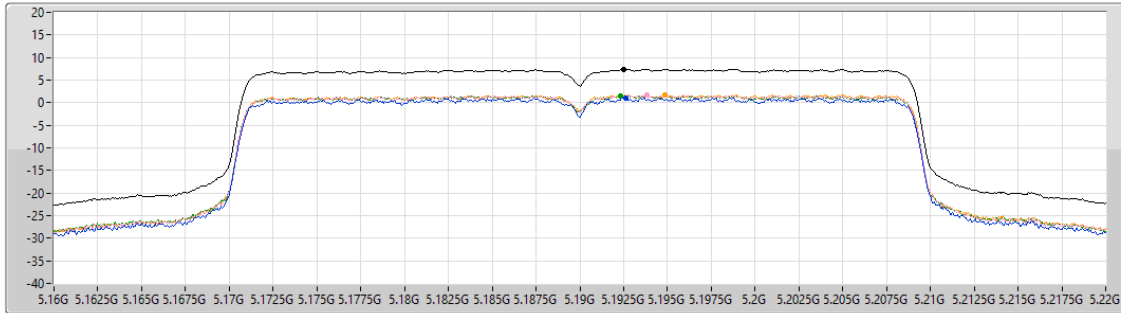

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.38	7.38	1.07	1.63	1.60	1.82

Sum
Port 1
Port 2
Port 3
Port 4


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5230MHz

18/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

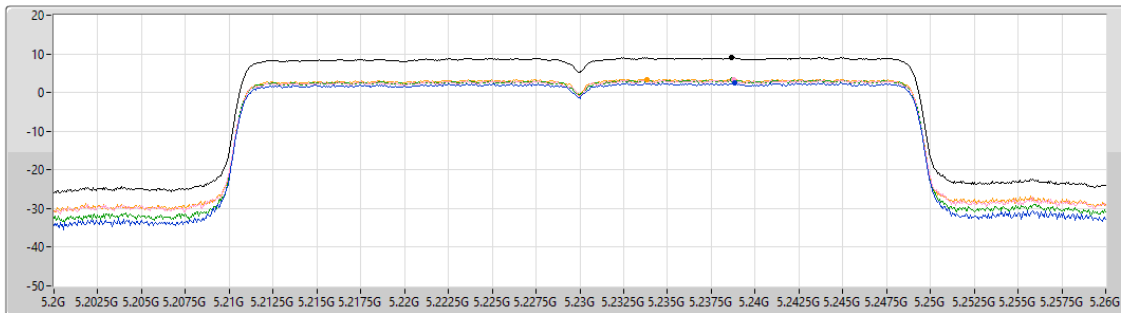

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.03	9.03	2.47	3.22	3.21	3.45

Sum
Port 1
Port 2
Port 3
Port 4


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5755MHz

18/09/2025

CF (Hz)
5.755G
Span (Hz)
60M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

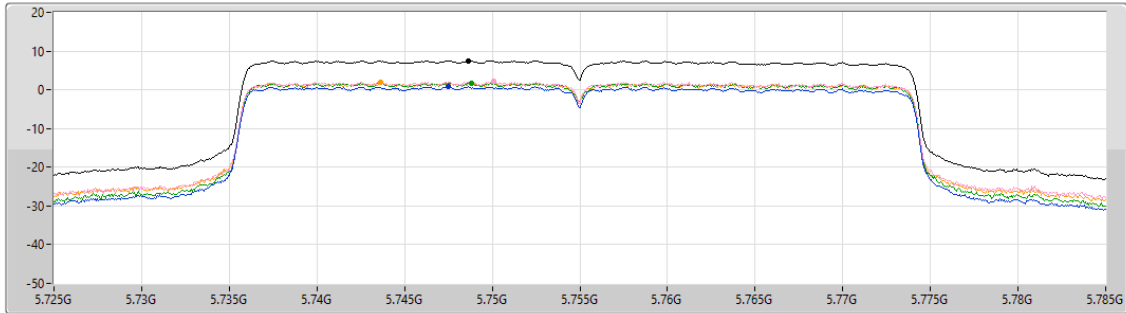

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.51	7.51	0.82	2.09	1.76	1.94


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5795MHz

18/09/2025

CF (Hz)
5.795G
Span (Hz)
60M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

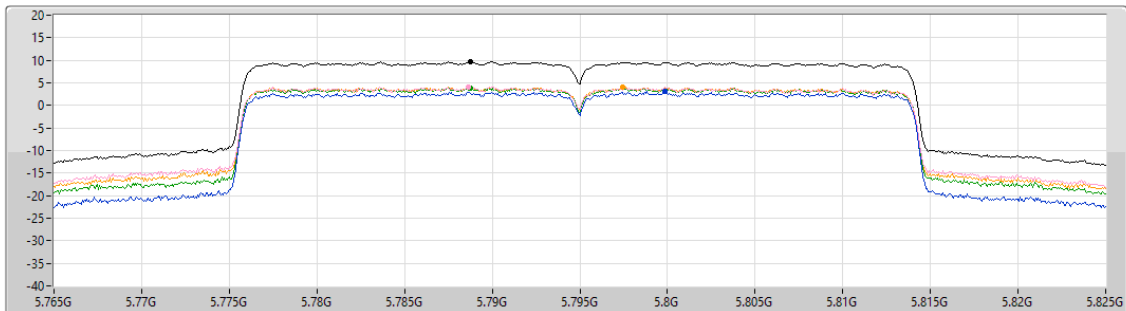

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.64	9.64	3.03	4.14	3.93	4.04

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5210MHz

18/09/2025

CF (Hz)
5.21G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

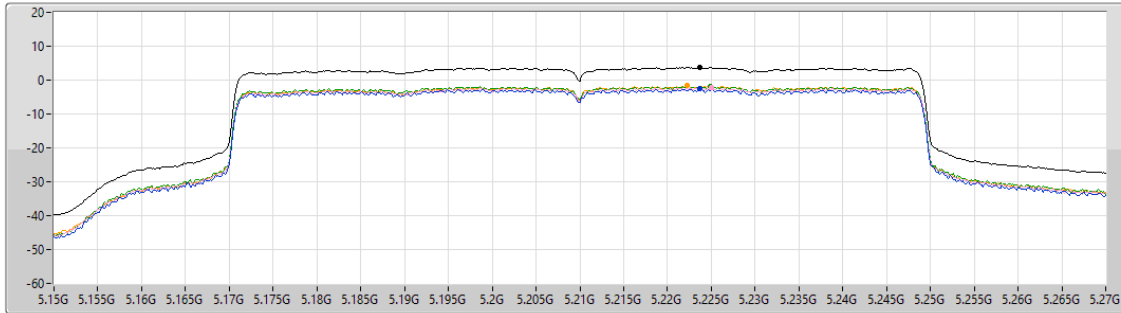

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.79	3.79	-2.62	-2.23	-1.89	-1.65

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5775MHz

18/09/2025

CF (Hz)
5.775G


Span (Hz)
120M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

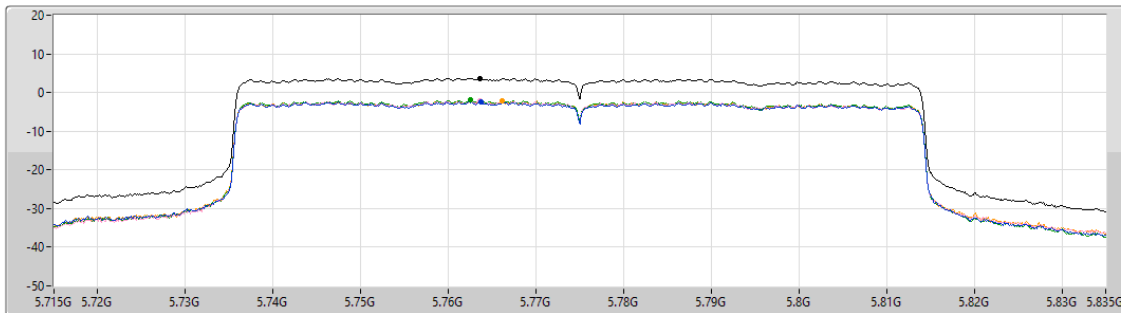

Sum

Port 1

Port 2

Port 3

Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.73	3.73	-2.31	-2.11	-1.97	-2.18

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5180MHz

18/09/2025

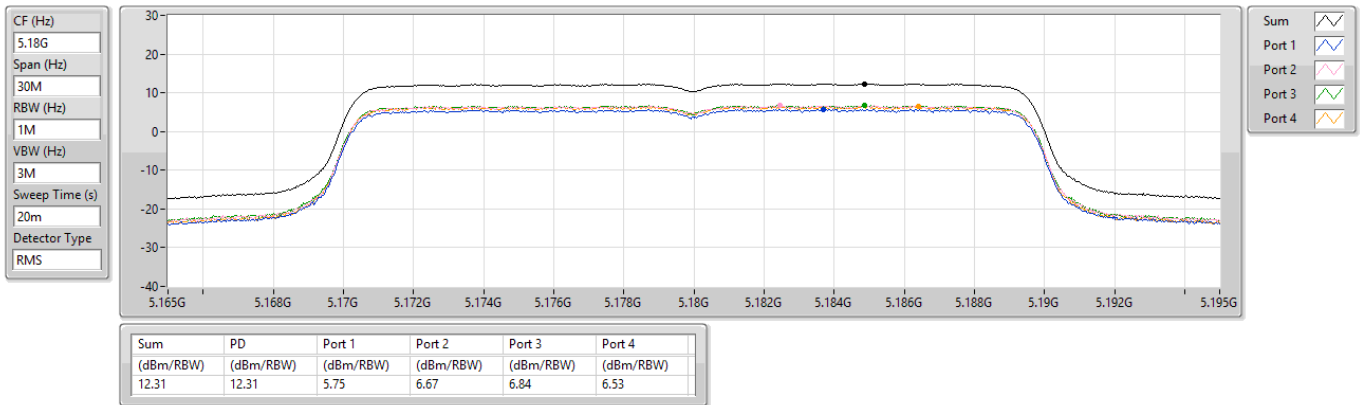


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5200MHz

18/09/2025

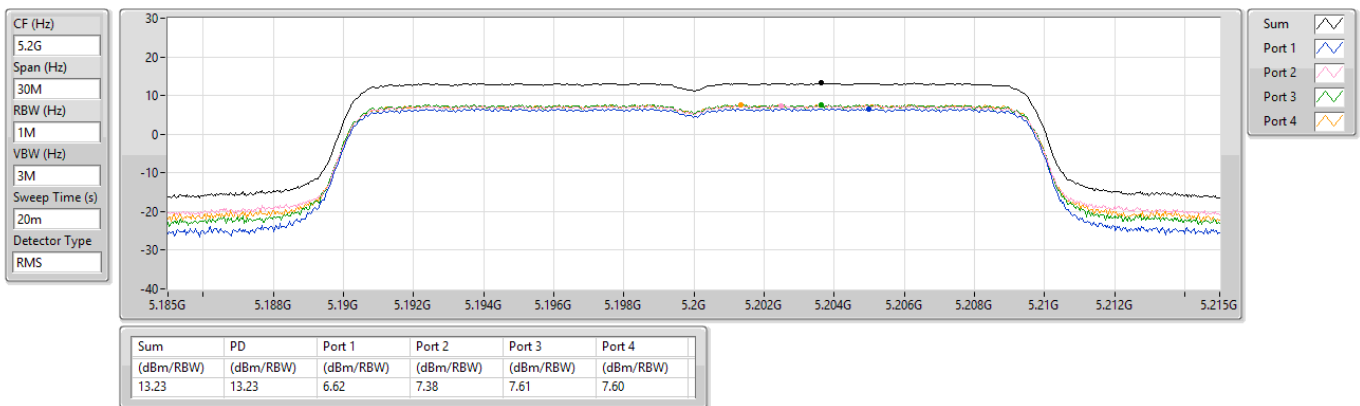


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5240MHz

18/09/2025

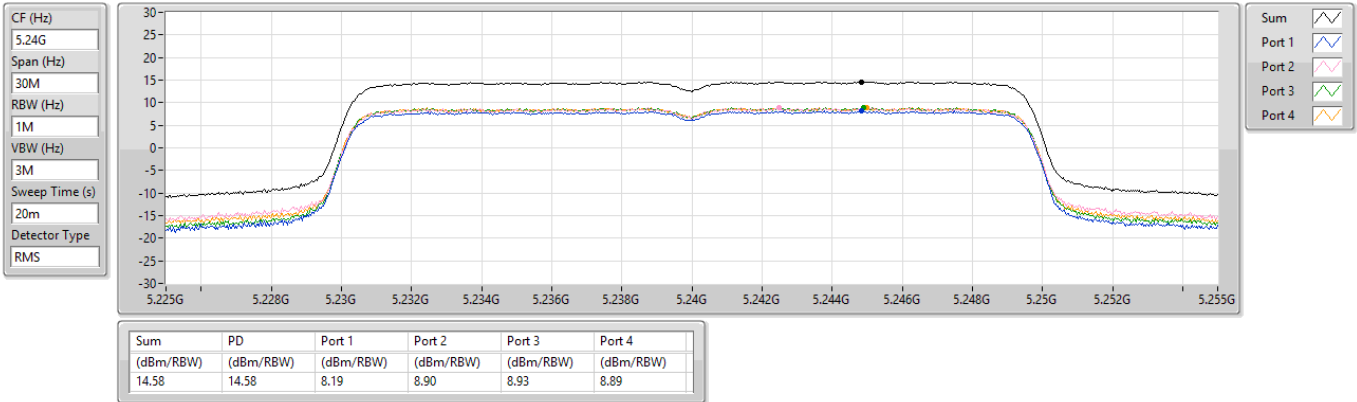


5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5745MHz

18/09/2025

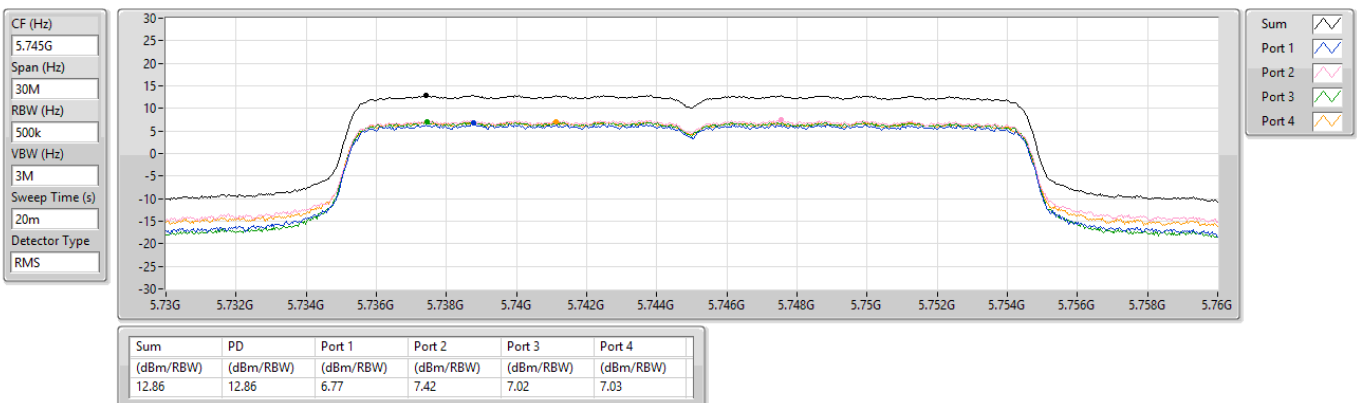


5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5785MHz

18/09/2025

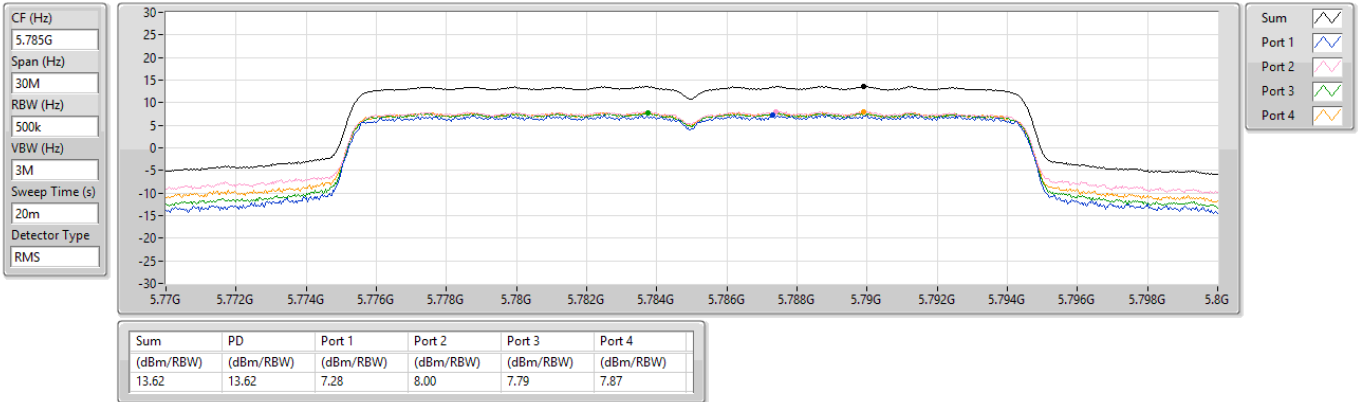


5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5825MHz

18/09/2025

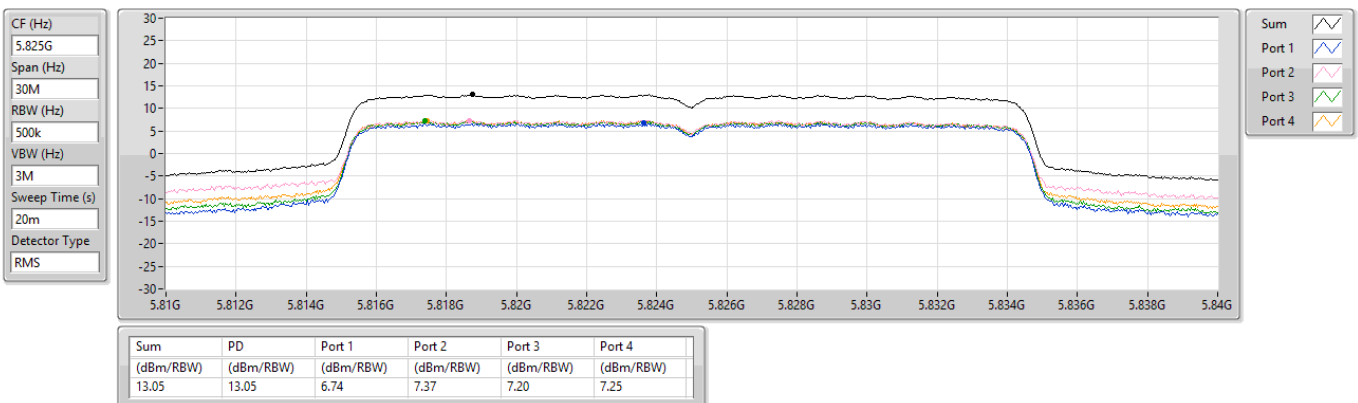


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5190MHz

18/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

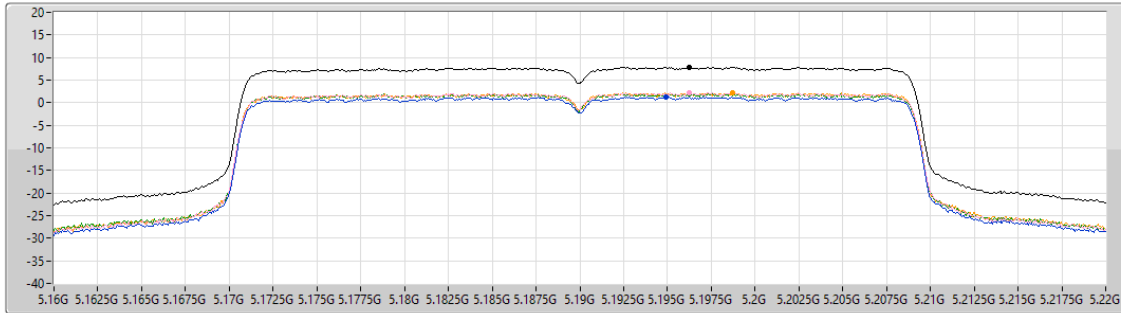

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
7.88	7.88	1.25	2.23	2.06	2.24


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5230MHz

18/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

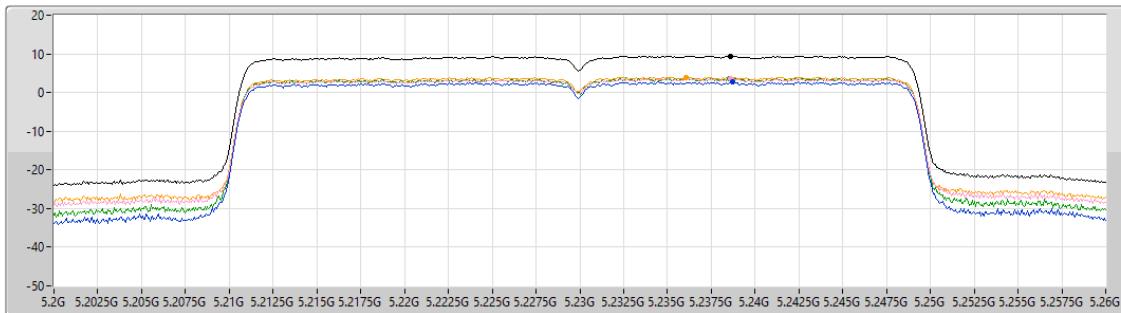


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.46	9.46	2.67	3.61	3.66	4.00

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5755MHz

18/09/2025

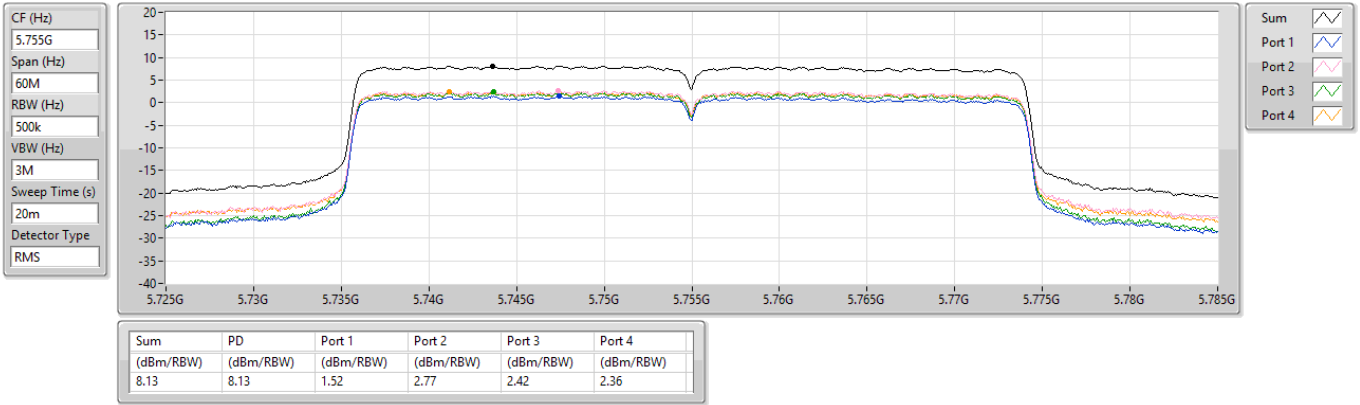


5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5795MHz

18/09/2025

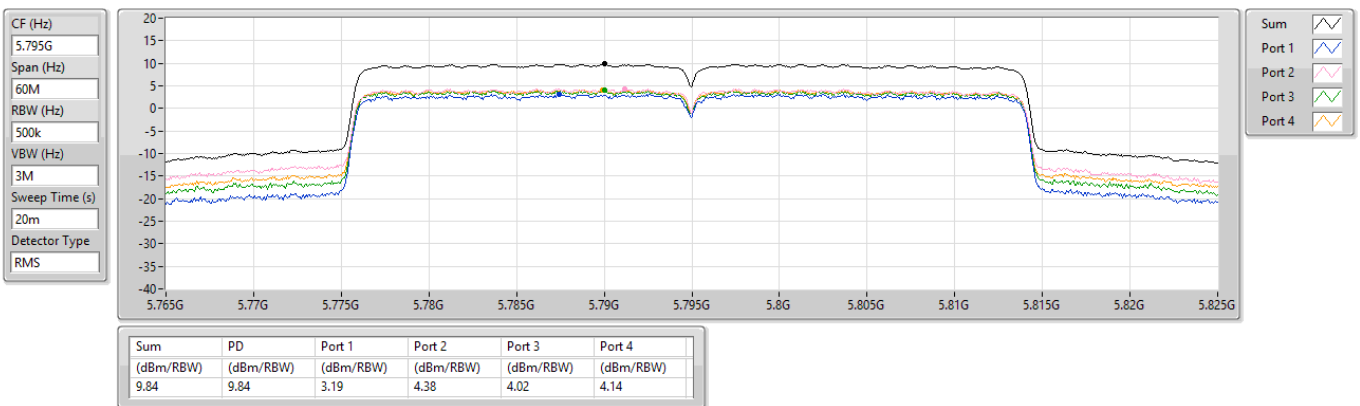


5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5210MHz

18/09/2025

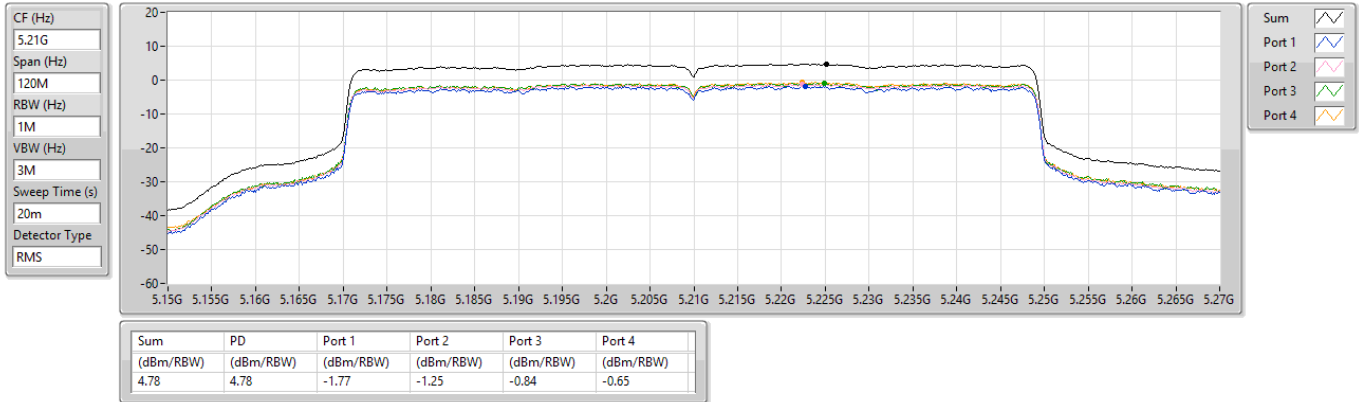


5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5775MHz

18/09/2025

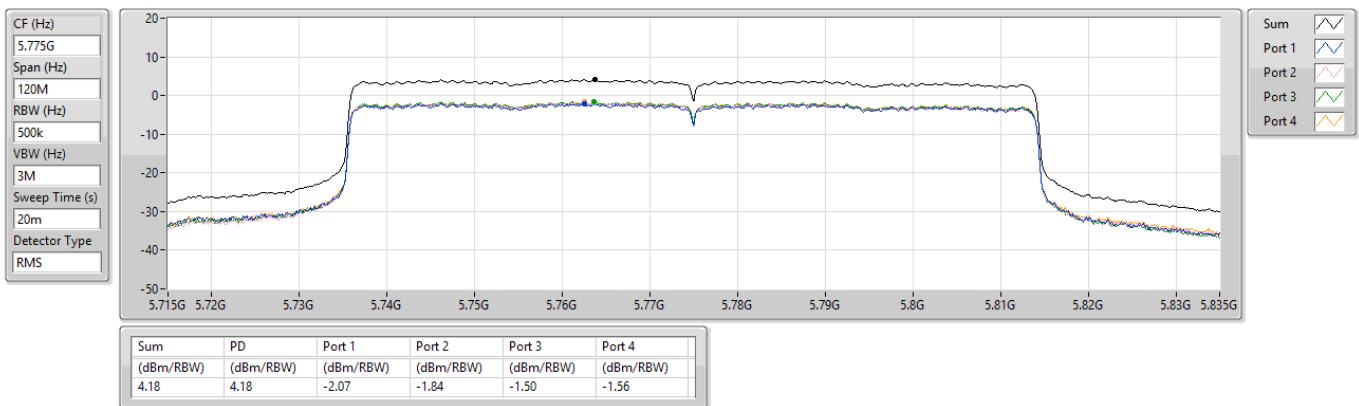

Test Mode: Mode 35

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.46
802.11be EHT20_Nss1,(MCS0)_1TX	8.91
802.11be EHT40_Nss1,(MCS0)_1TX	4.79
802.11be EHT80_Nss1,(MCS0)_1TX	0.37

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.56	8.35	8.35	17.00
5200MHz	Pass	3.56	10.46	10.46	17.00
5240MHz	Pass	3.56	9.81	9.81	17.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.56	7.38	7.38	17.00
5200MHz	Pass	3.56	8.91	8.91	17.00
5240MHz	Pass	3.56	8.51	8.51	17.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.56	3.39	3.39	17.00
5230MHz	Pass	3.56	4.79	4.79	17.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.56	0.37	0.37	17.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5180MHz

17/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

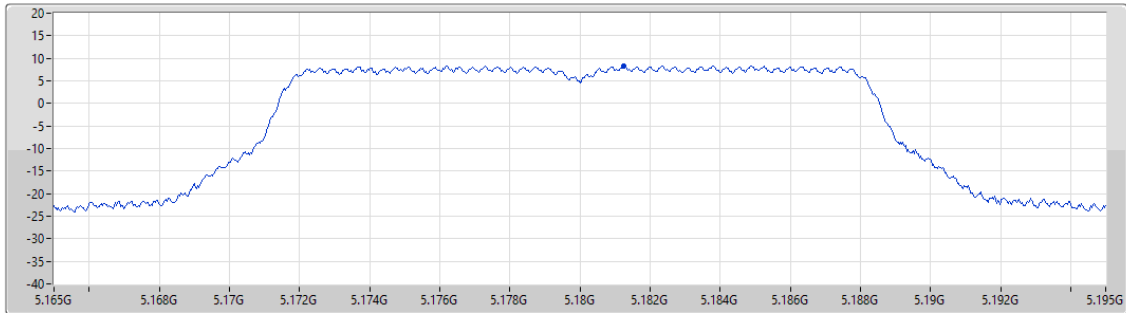

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.35	8.35	8.35


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5200MHz

17/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

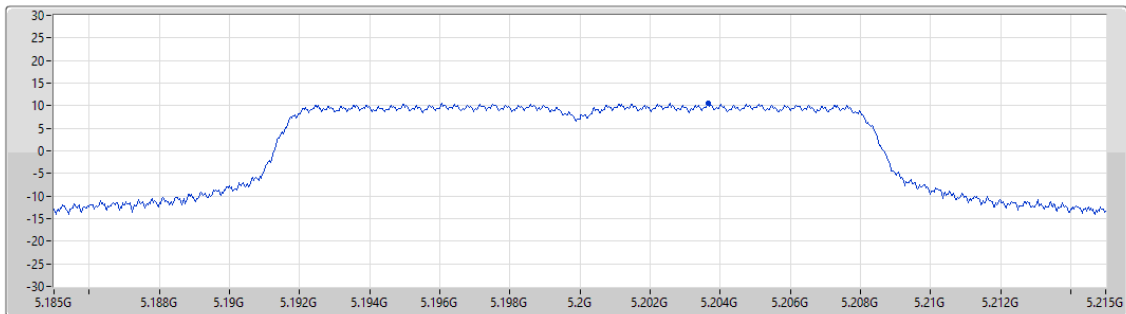

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.46	10.46	10.46

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5240MHz

17/09/2025

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

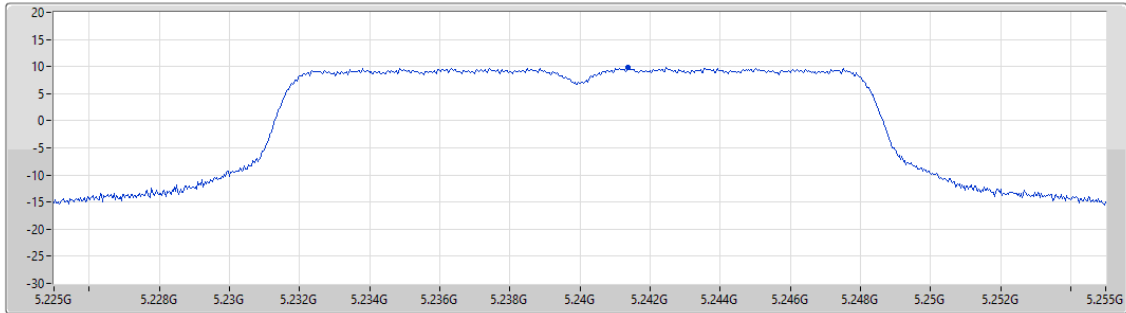

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.81	9.81	9.81

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5180MHz

17/09/2025

CF (Hz)
5.18G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

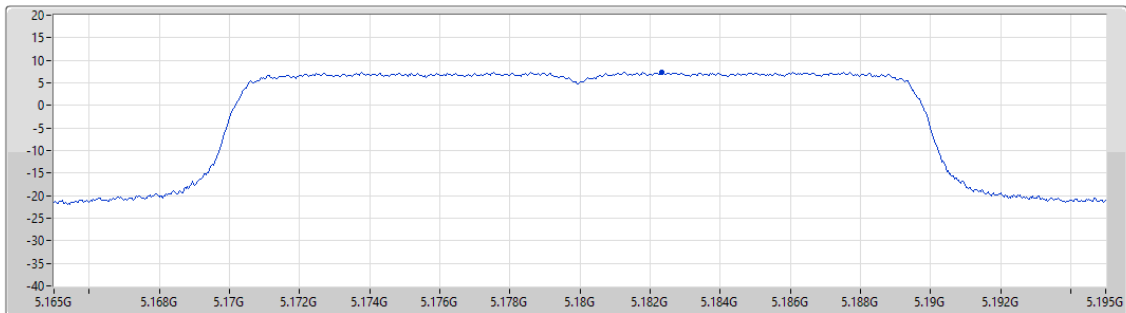


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.38	7.38	7.38

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5200MHz

17/09/2025

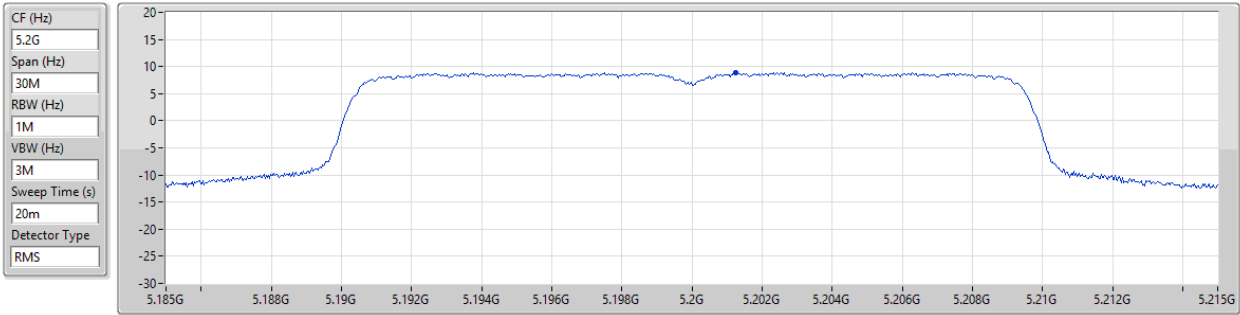


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.91	8.91	8.91

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5240MHz

17/09/2025

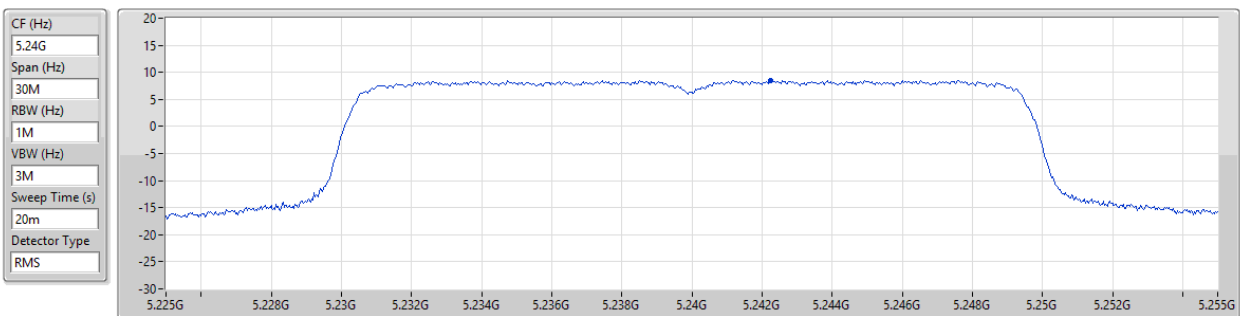


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.51	8.51	8.51

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5190MHz

17/09/2025

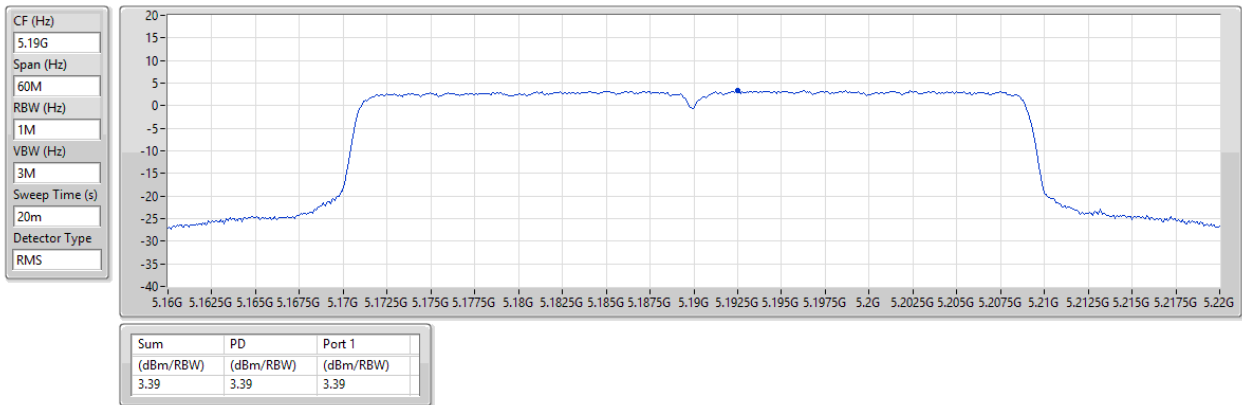


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5230MHz

17/09/2025

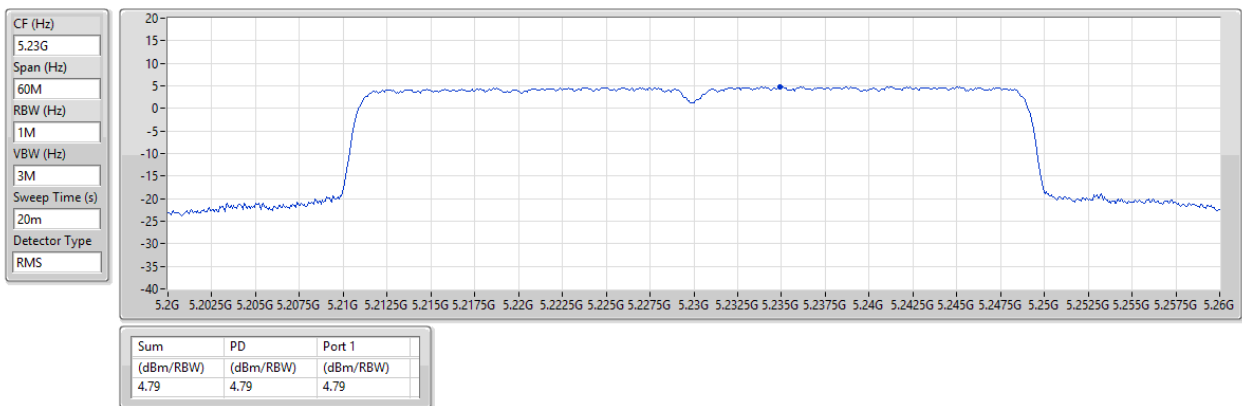


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5210MHz

17/09/2025

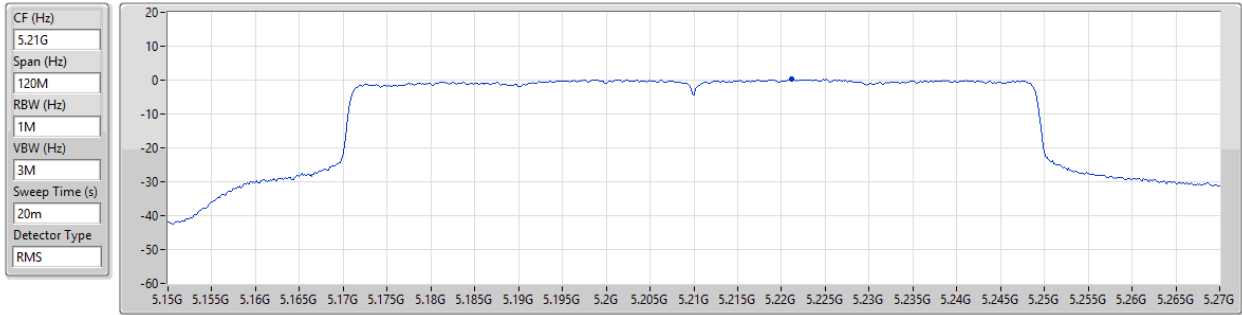

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.37	0.37	0.37



Test Mode: Mode 36

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	10.23

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	6.67	6.77	7.60	10.22	16.33
5200MHz	Pass	6.67	6.68	7.95	10.23	16.33
5240MHz	Pass	6.67	6.66	7.56	10.10	16.33


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5180MHz

17/09/2025

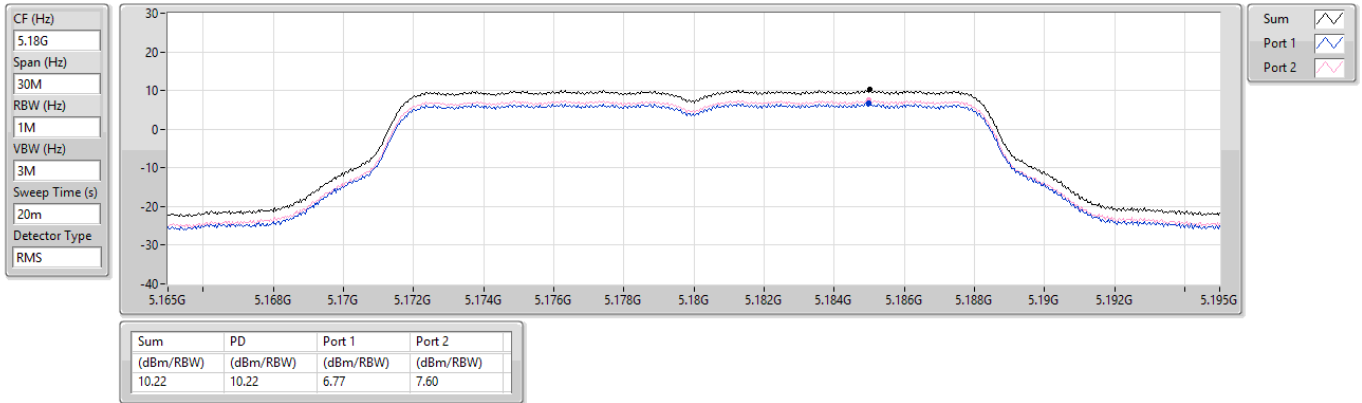


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

02/10/2025

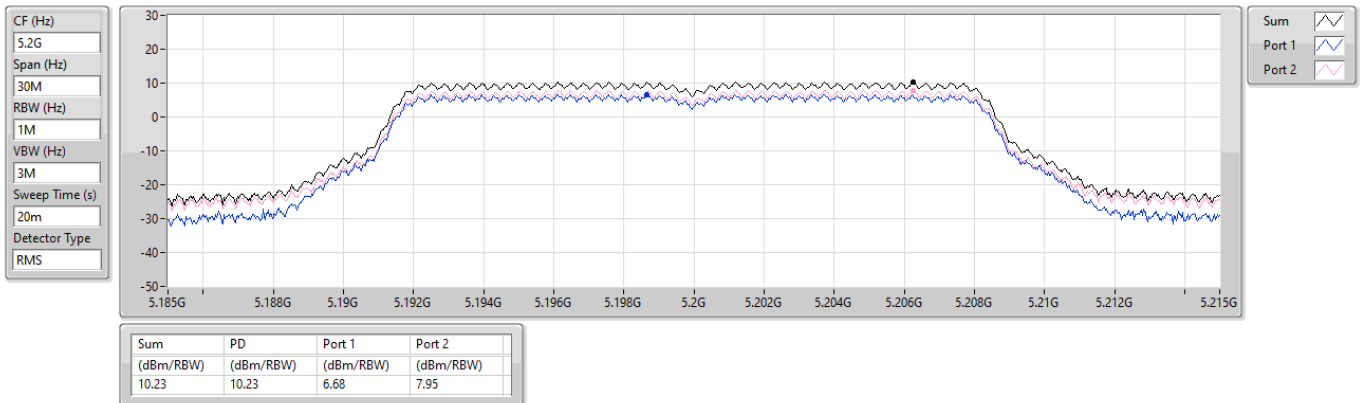


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

02/10/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

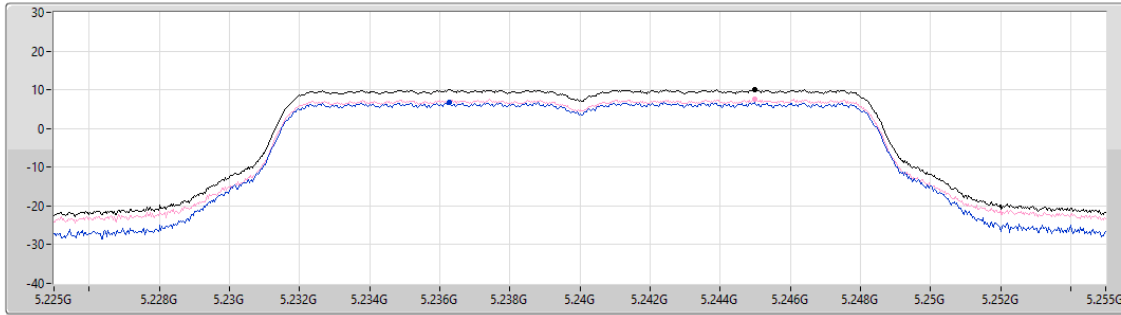

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.10	10.10	6.66	7.56

Test Mode: Mode 37

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT20_Nss2,(MCS0)_2TX	9.50
802.11be EHT40_Nss2,(MCS0)_2TX	6.57
802.11be EHT80_Nss2,(MCS0)_2TX	2.86

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.66	5.69	6.81	9.17	17.00
5200MHz	Pass	3.66	5.99	6.80	9.35	17.00
5240MHz	Pass	3.66	6.29	6.82	9.50	17.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.66	1.67	2.65	5.04	17.00
5230MHz	Pass	3.66	3.14	3.94	6.57	17.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.66	-0.39	0.23	2.86	17.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5180MHz

17/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

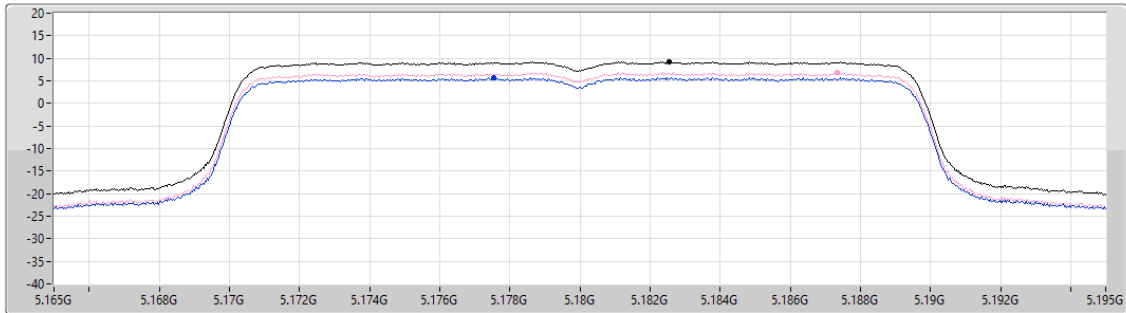

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.17	9.17	5.69	6.81

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5200MHz

02/10/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

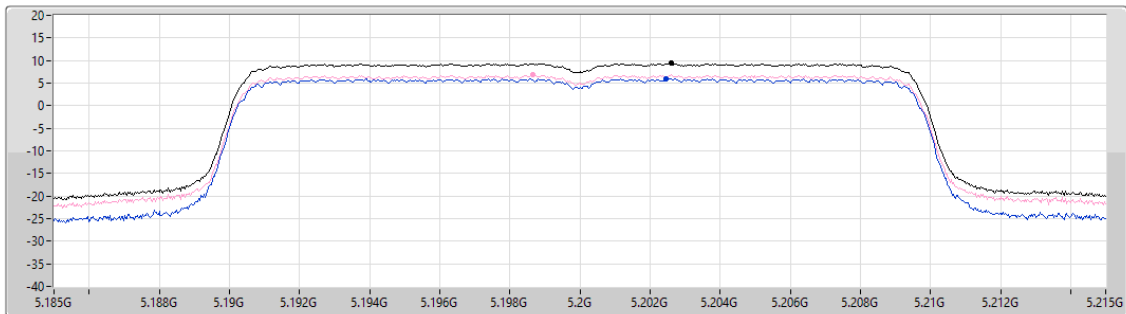

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.35	9.35	5.99	6.80

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5240MHz

02/10/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

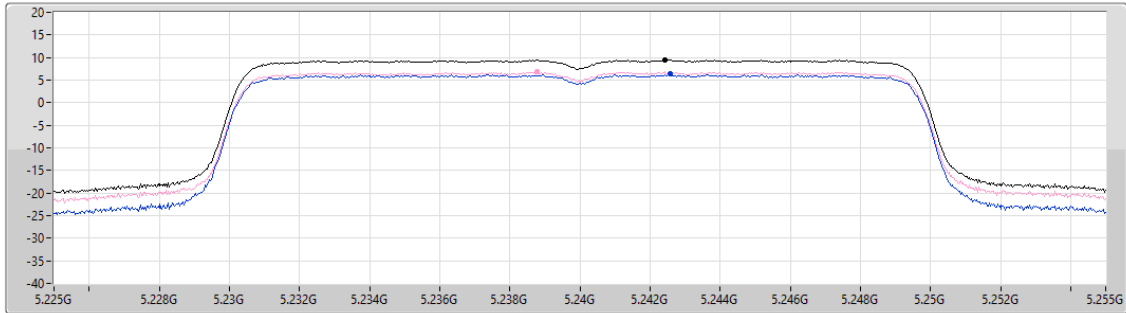

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.50	9.50	6.29	6.82

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5190MHz

17/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

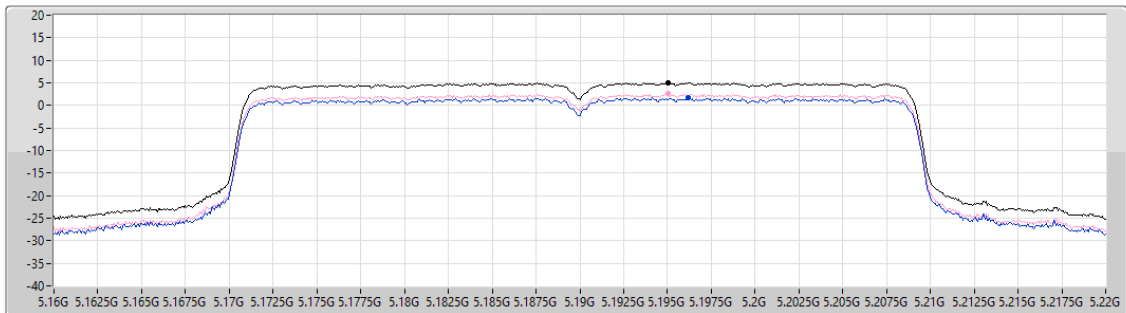

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.04	5.04	1.67	2.65

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5230MHz

02/10/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

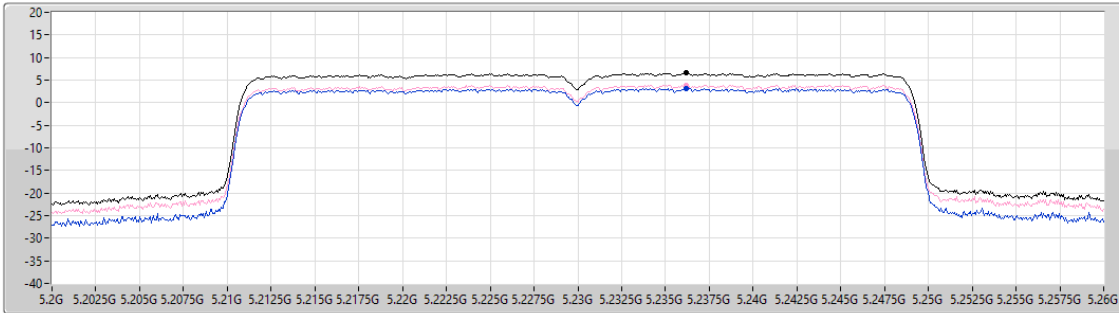

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
6.57	6.57	3.14	3.94

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5210MHz

17/09/2025

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

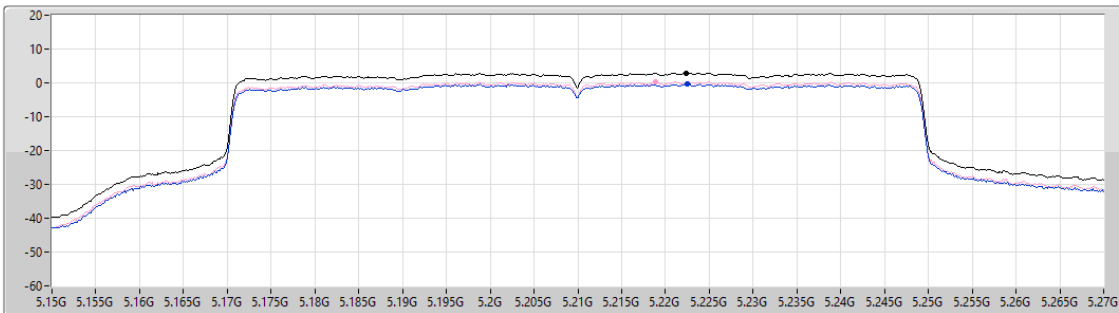

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
2.86	2.86	-0.39	0.23

Sum
Port 1
Port 2

Test Mode: Mode 38

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_4TX	7.52
802.11be EHT20_Nss1,(MCS0)_4TX	6.57
802.11be EHT40_Nss1,(MCS0)_4TX	3.56
802.11be EHT80_Nss1,(MCS0)_4TX	0.68

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	9.56	1.17	1.89	1.87	1.84	7.52	13.44
5200MHz	Pass	9.56	1.64	1.90	1.98	1.83	7.45	13.44
5240MHz	Pass	9.56	1.08	1.89	1.78	2.03	7.36	13.44
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	9.56	0.01	0.67	0.56	0.72	6.42	13.44
5200MHz	Pass	9.56	-0.13	1.04	0.75	0.77	6.57	13.44
5240MHz	Pass	9.56	-0.09	0.76	0.58	0.61	6.36	13.44
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	9.56	-2.83	-2.24	-2.32	-2.17	3.49	13.44
5230MHz	Pass	9.56	-2.92	-2.22	-2.27	-1.91	3.56	13.44
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	9.56	-5.68	-5.14	-5.02	-4.94	0.68	13.44

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;


Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5180MHz

02/10/2025

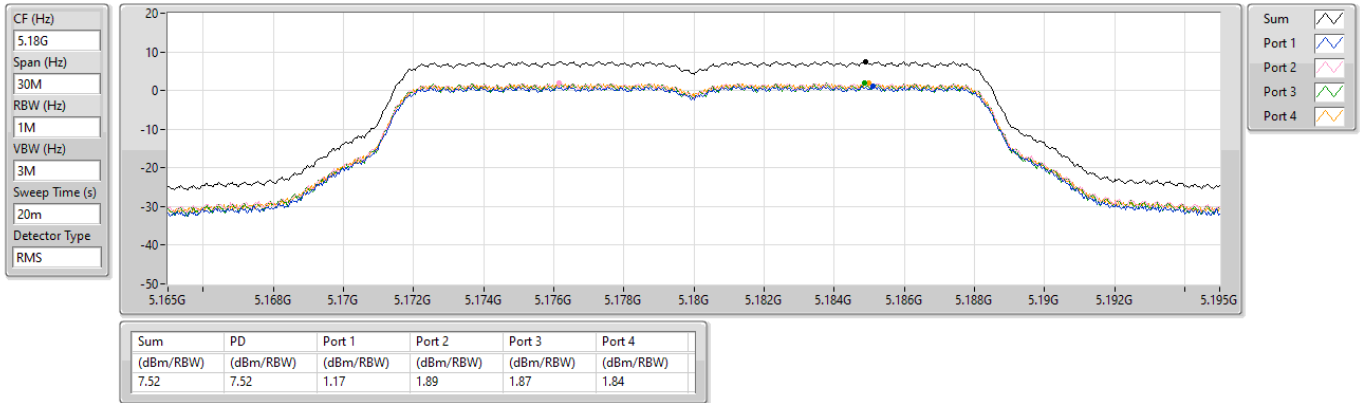


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5200MHz

02/10/2025

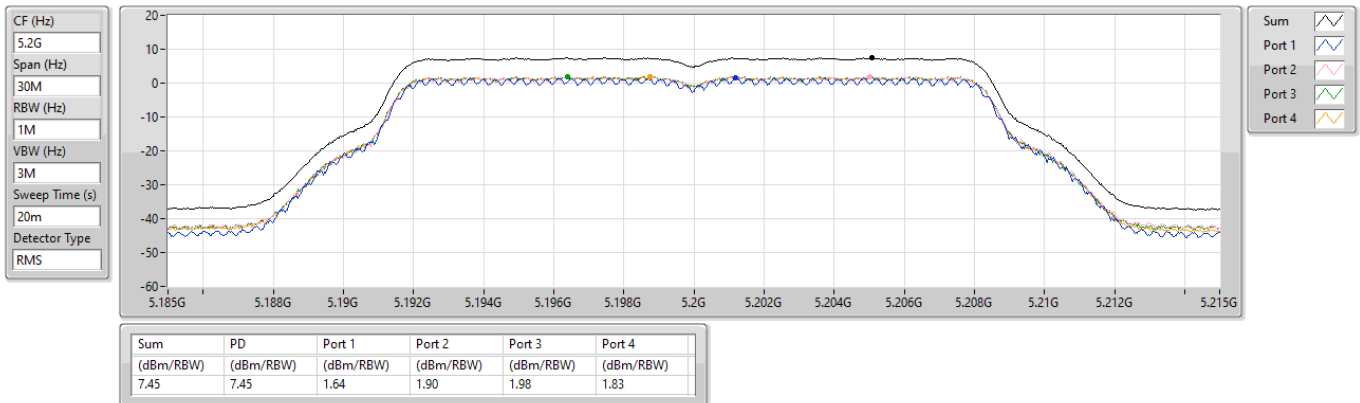


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5240MHz

02/10/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

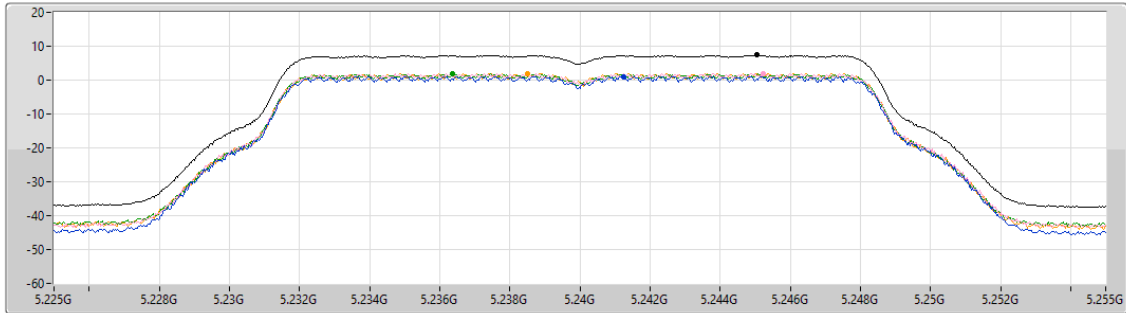

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.36	7.36	1.08	1.89	1.78	2.03

Sum
Port 1
Port 2
Port 3
Port 4


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5180MHz

02/10/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

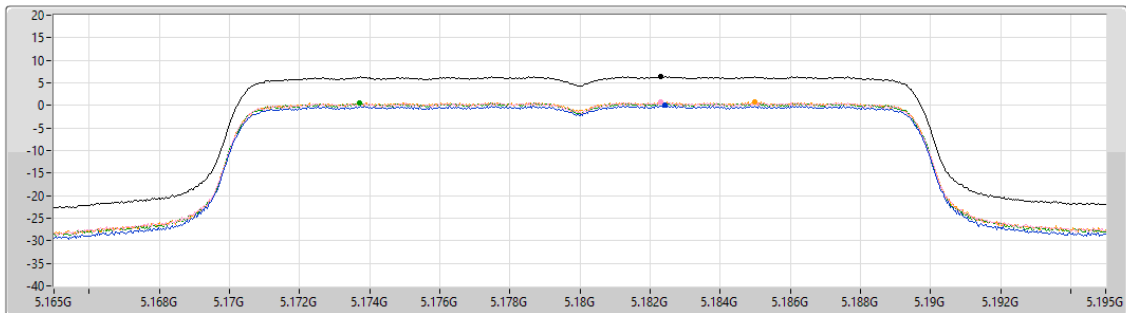

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.42	6.42	0.01	0.67	0.56	0.72


Sum
Port 1
Port 2
Port 3
Port 4

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5200MHz

02/10/2025

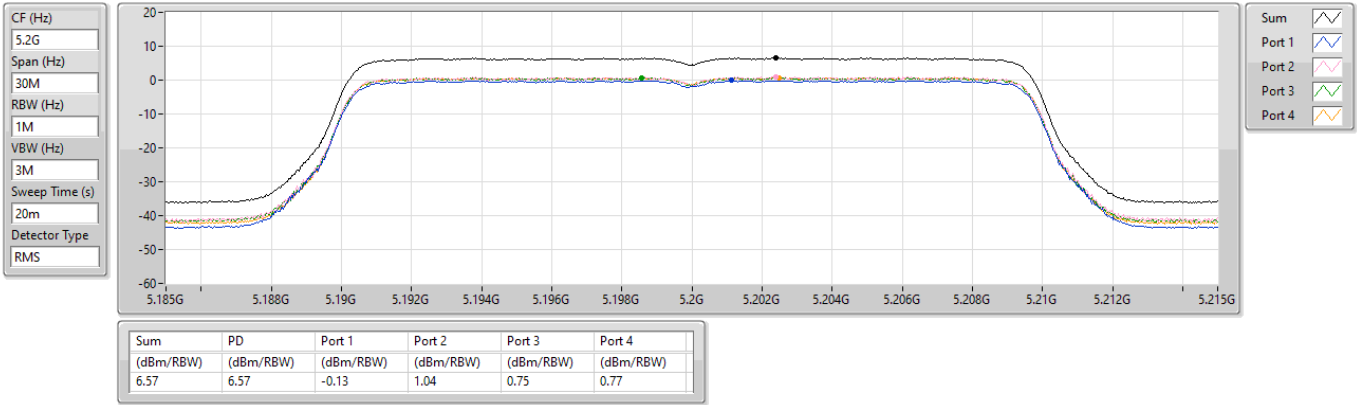


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5240MHz

02/10/2025

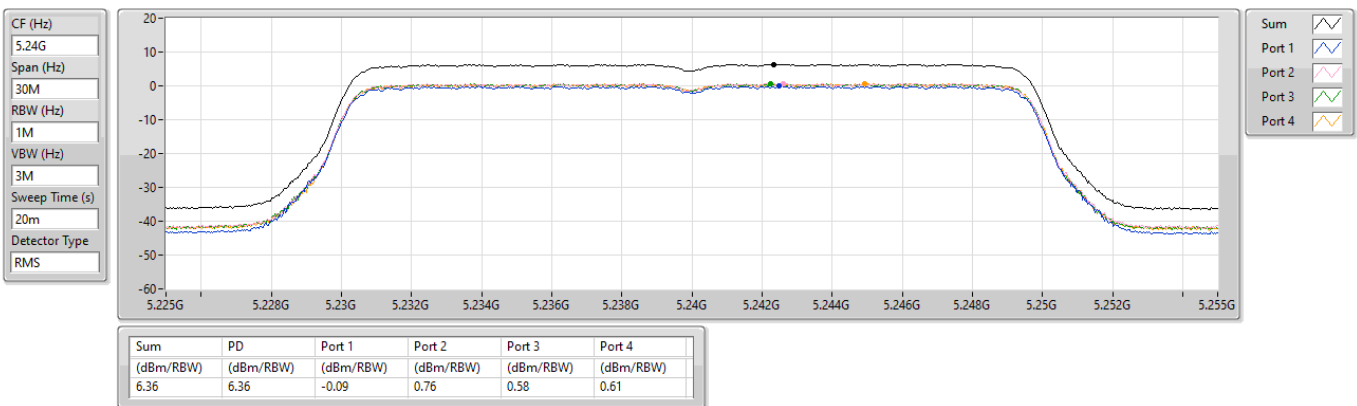


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5190MHz

02/10/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

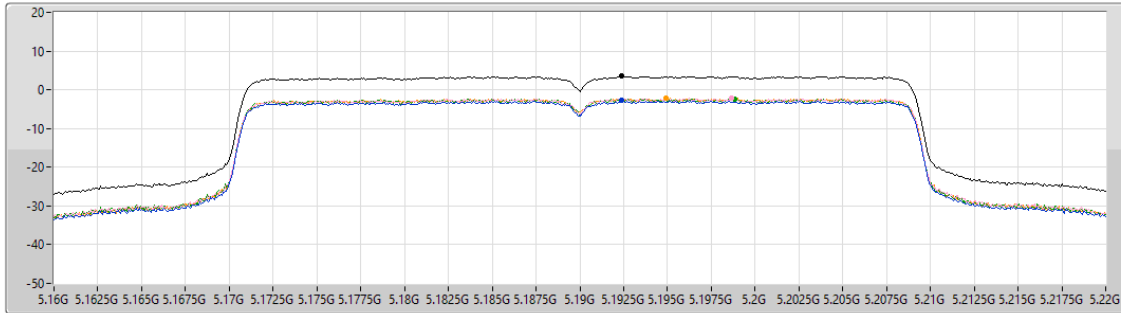

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.49	3.49	-2.83	-2.24	-2.32	-2.17


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5230MHz

02/10/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

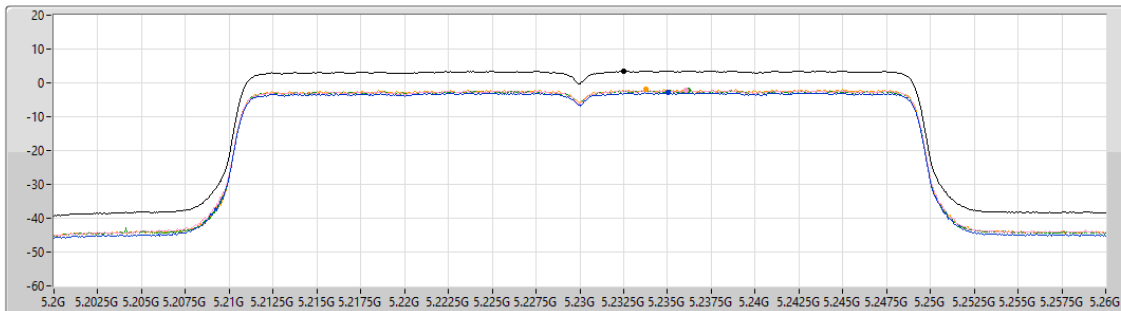


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.56	3.56	-2.92	-2.22	-2.27	-1.91

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5210MHz

02/10/2025

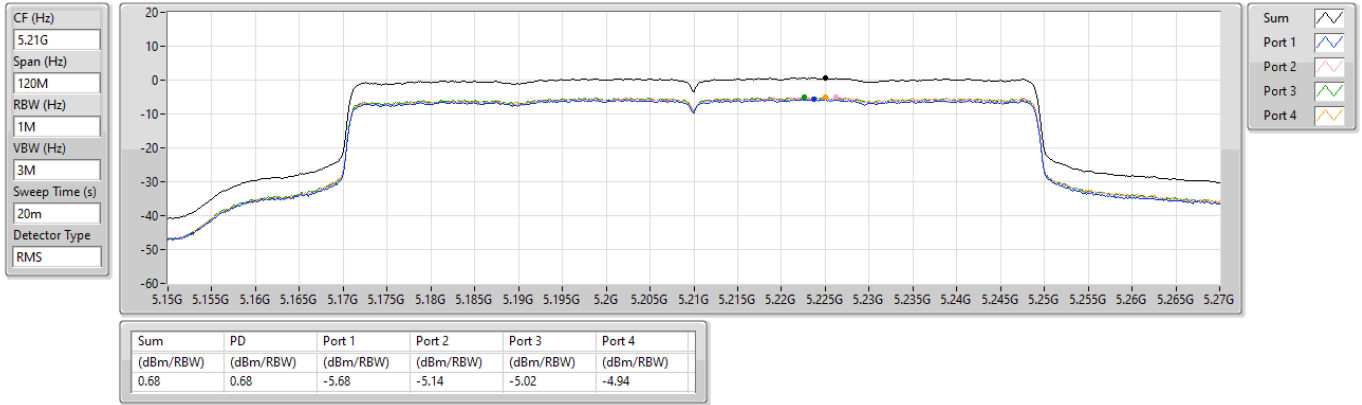

Test Mode: Mode 39

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT20_Nss4,(MCS0)_4TX	8.10
802.11be EHT40_Nss4,(MCS0)_4TX	5.09
802.11be EHT80_Nss4,(MCS0)_4TX	2.61

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.54	1.72	2.32	2.19	2.41	8.04	17.00
5200MHz	Pass	3.54	1.74	2.51	2.20	2.35	8.02	17.00
5240MHz	Pass	3.54	1.67	2.27	2.15	2.48	8.10	17.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.54	-1.41	-0.72	-1.19	-0.71	4.92	17.00
5230MHz	Pass	3.54	-1.29	-0.61	-0.99	-0.48	5.09	17.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.54	-3.38	-3.44	-3.30	-2.89	2.61	17.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5180MHz

02/10/2025

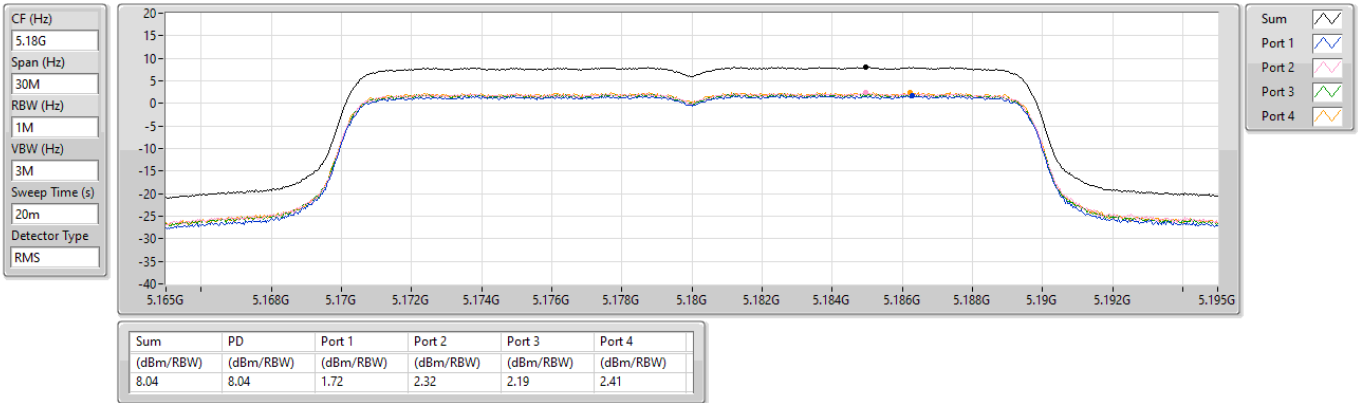


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5200MHz

02/10/2025

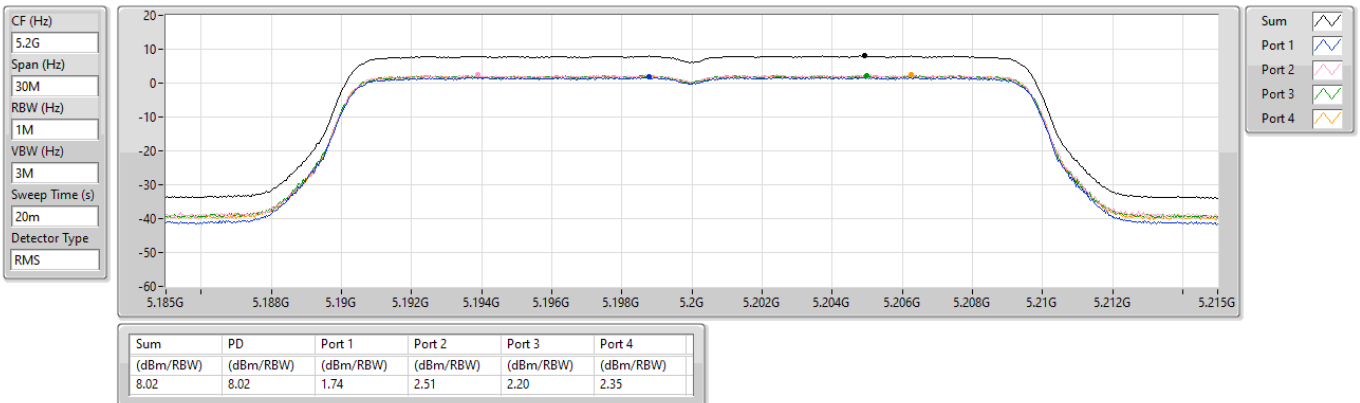


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5240MHz

02/10/2025

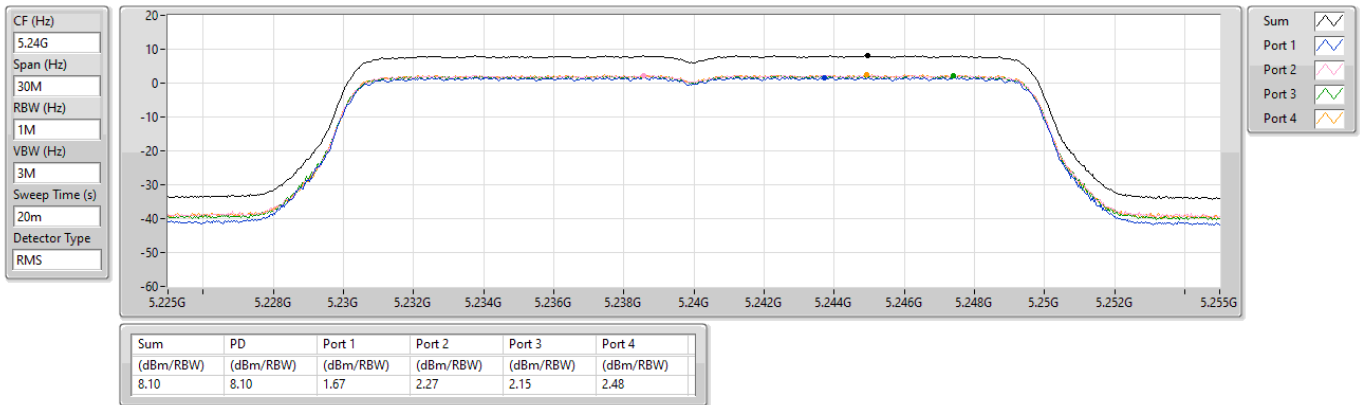


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5190MHz

02/10/2025

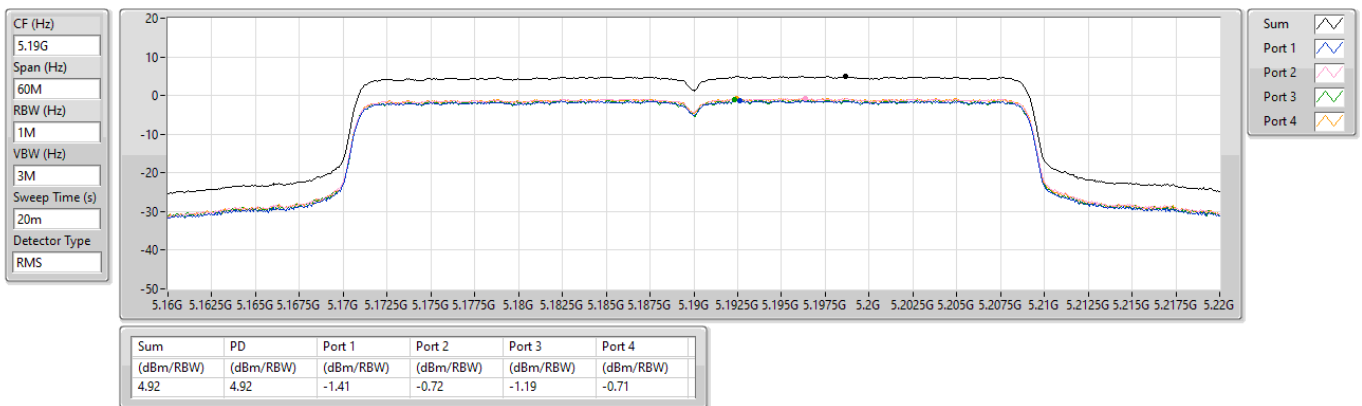


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5230MHz

02/10/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

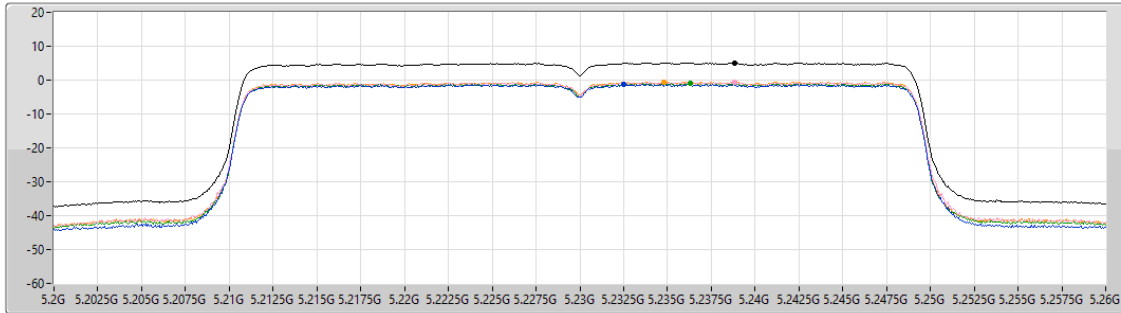

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.09	5.09	-1.29	-0.61	-0.99	-0.48

Sum
Port 1
Port 2
Port 3
Port 4


5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5210MHz

02/10/2025

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

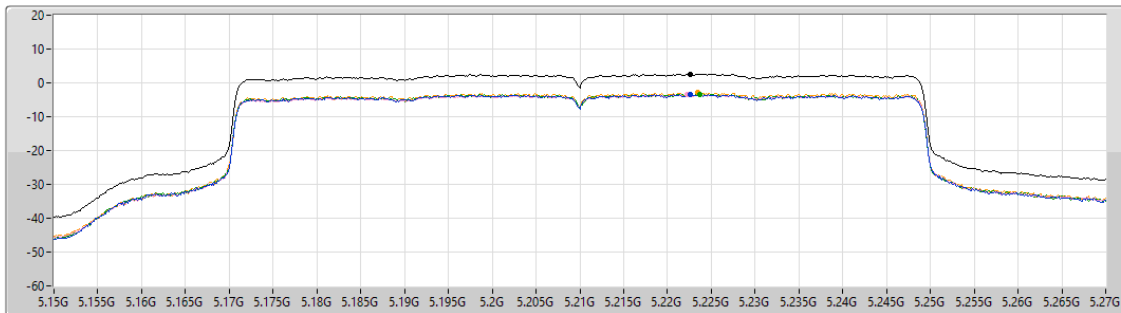

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.61	2.61	-3.38	-3.44	-3.30	-2.89

Sum
Port 1
Port 2
Port 3
Port 4

Test Mode: Mode 40

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_1TX	7.09
802.11be EHT20_Nss1,(MCS0)_1TX	5.77
802.11be EHT40_Nss1,(MCS0)_1TX	2.96
802.11be EHT80_Nss1,(MCS0)_1TX	0.00

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	3.56	6.84	6.84	17.00
5200MHz	Pass	3.56	7.09	7.09	17.00
5240MHz	Pass	3.56	7.00	7.00	17.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	3.56	5.67	5.67	17.00
5200MHz	Pass	3.56	5.71	5.71	17.00
5240MHz	Pass	3.56	5.77	5.77	17.00
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	3.56	2.92	2.92	17.00
5230MHz	Pass	3.56	2.96	2.96	17.00
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	3.56	-0.00	0.00	17.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5180MHz

22/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

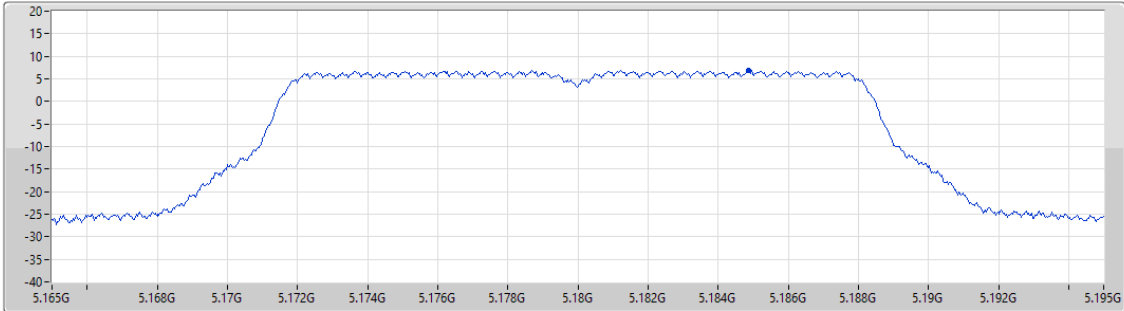


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5200MHz

22/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

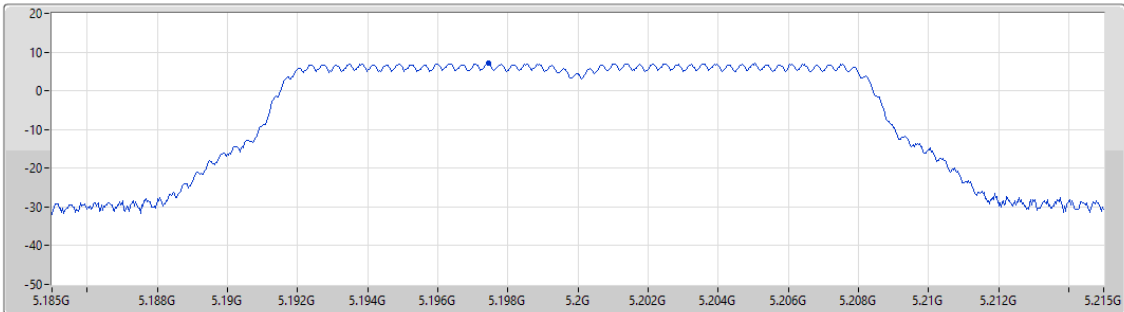


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5240MHz

22/09/2025

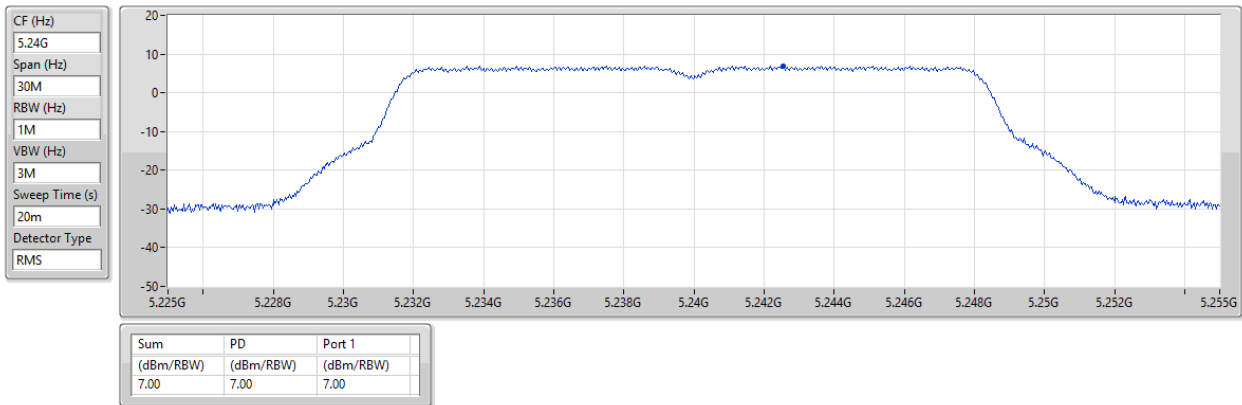


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5180MHz

22/09/2025

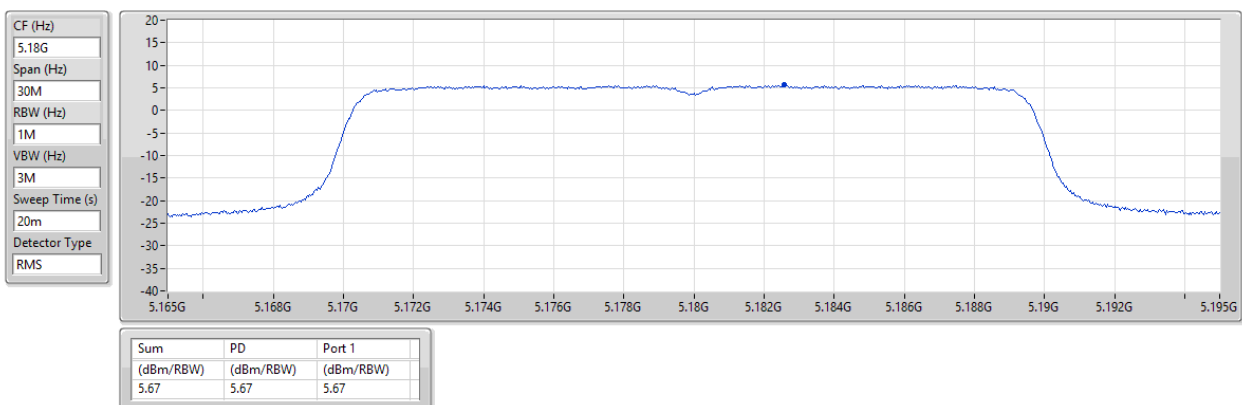


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5200MHz

22/09/2025

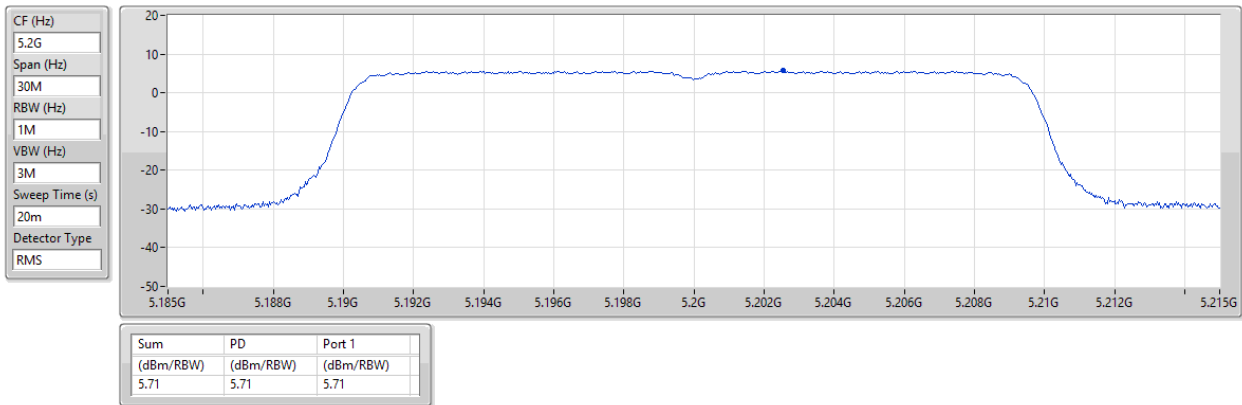


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5240MHz

22/09/2025

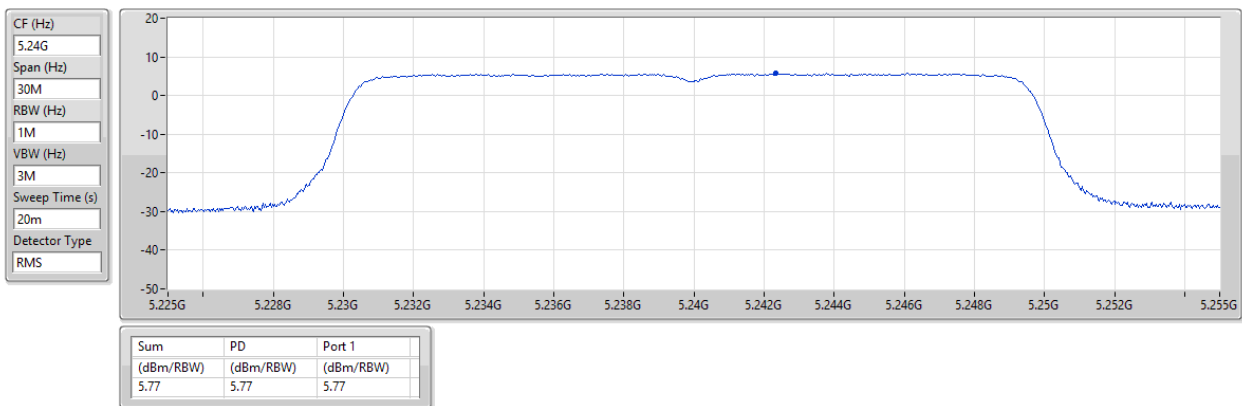


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5190MHz

22/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

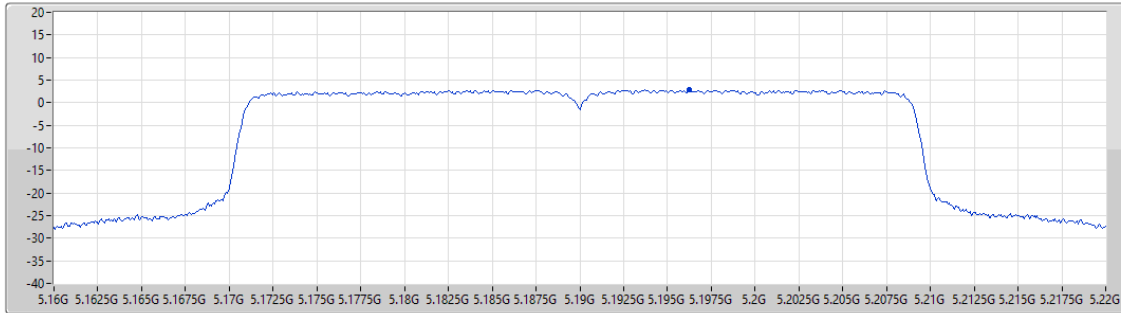

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.92	2.92	2.92

Port 1


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5230MHz

22/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

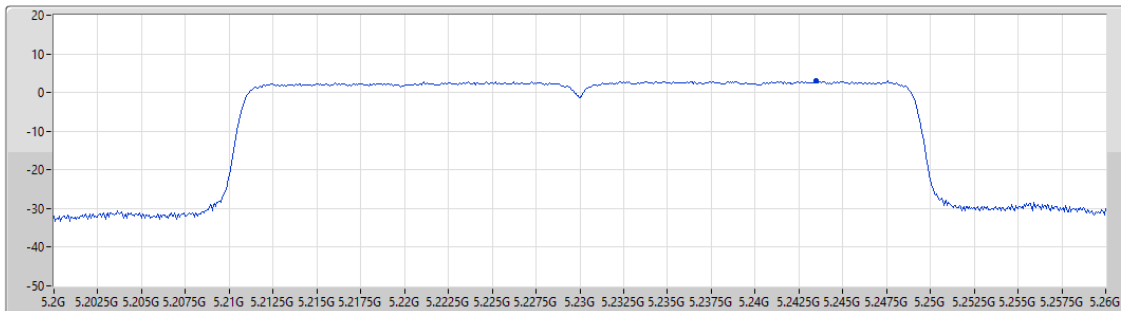

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.96	2.96	2.96


Port 1

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5210MHz

22/09/2025

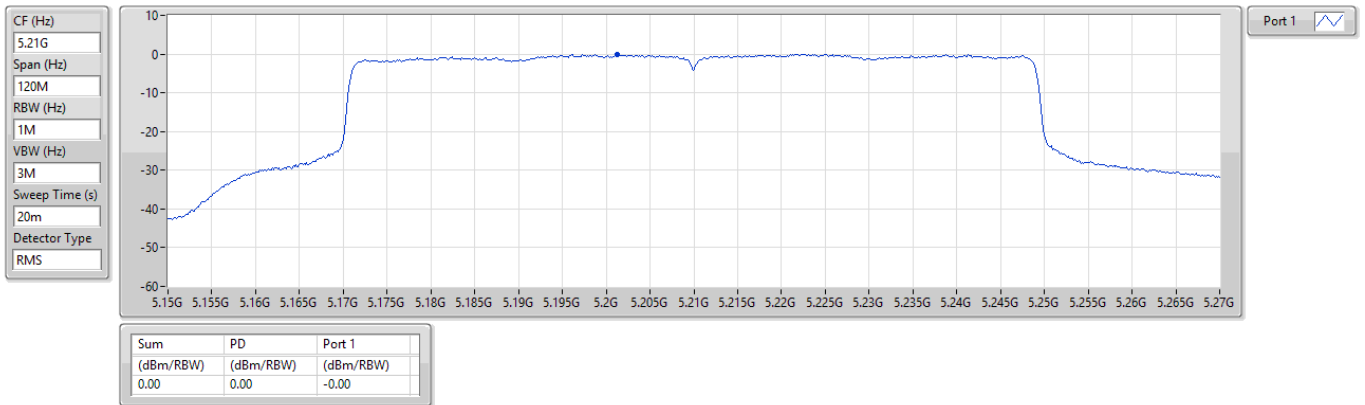

Test Mode: Mode 41

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	6.58

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	6.67	3.35	3.93	6.58	16.33
5200MHz	Pass	6.67	3.13	3.92	6.54	16.33
5240MHz	Pass	6.67	3.20	4.06	6.48	16.33

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5180MHz

22/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

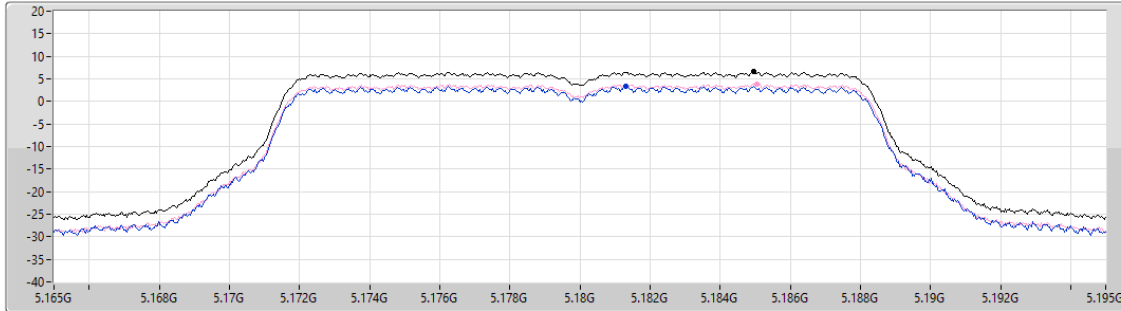

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.58	6.58	3.35	3.93


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

22/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

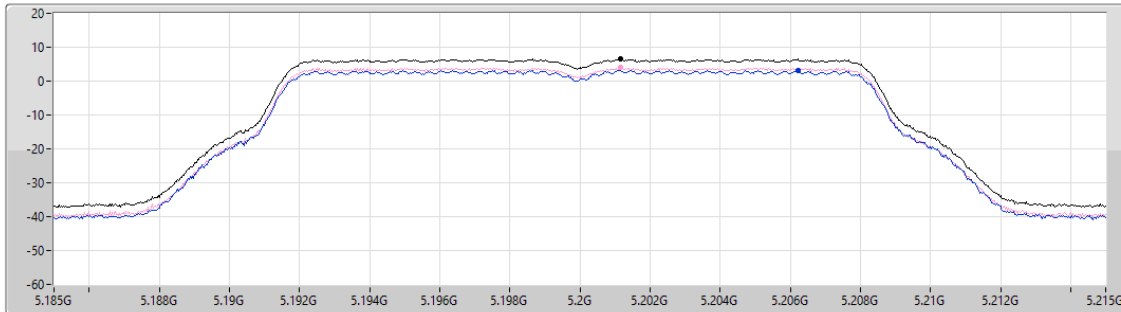

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.54	6.54	3.13	3.92

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

22/09/2025

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

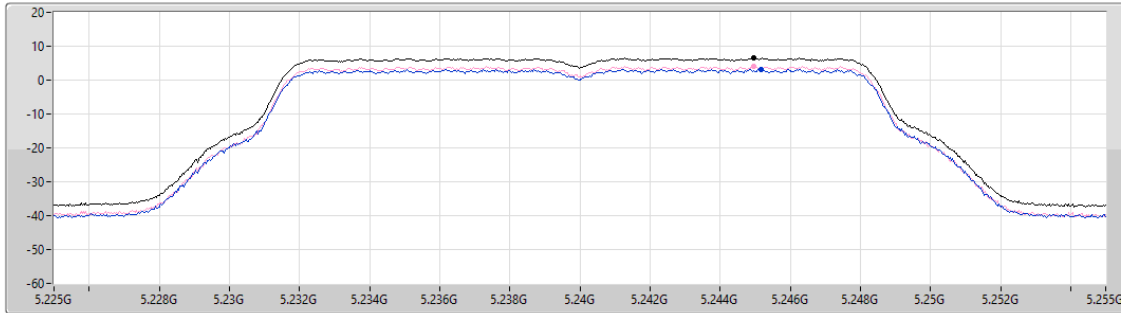

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.48	6.48	3.20	4.06

Test Mode: Mode 42

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT20_Nss2,(MCS0)_2TX	5.63
802.11be EHT40_Nss2,(MCS0)_2TX	2.80
802.11be EHT80_Nss2,(MCS0)_2TX	-0.20

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.66	2.40	3.04	5.63	17.00
5200MHz	Pass	3.66	2.15	2.85	5.41	17.00
5240MHz	Pass	3.66	2.28	3.02	5.62	17.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.66	-0.68	0.17	2.73	17.00
5230MHz	Pass	3.66	-0.38	0.05	2.80	17.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.66	-3.44	-2.91	-0.20	17.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5180MHz

22/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

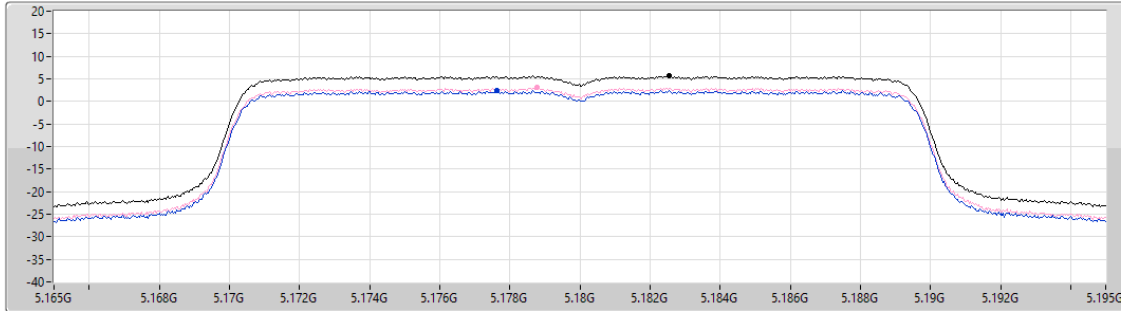

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
5.63	5.63	2.40	3.04

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5200MHz

22/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

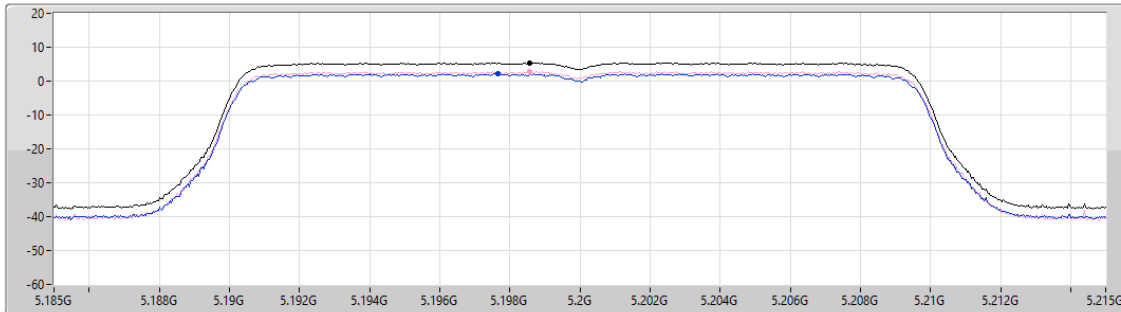

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
5.41	5.41	2.15	2.85

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5240MHz

22/09/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

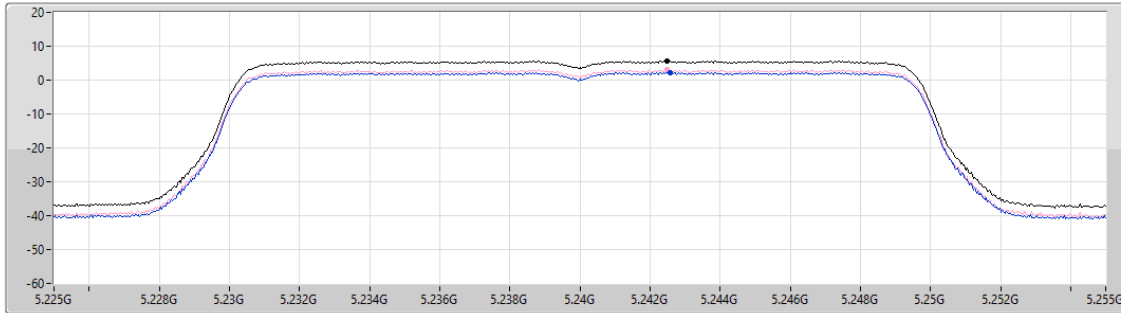

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.62	5.62	2.28	3.02

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5190MHz

22/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

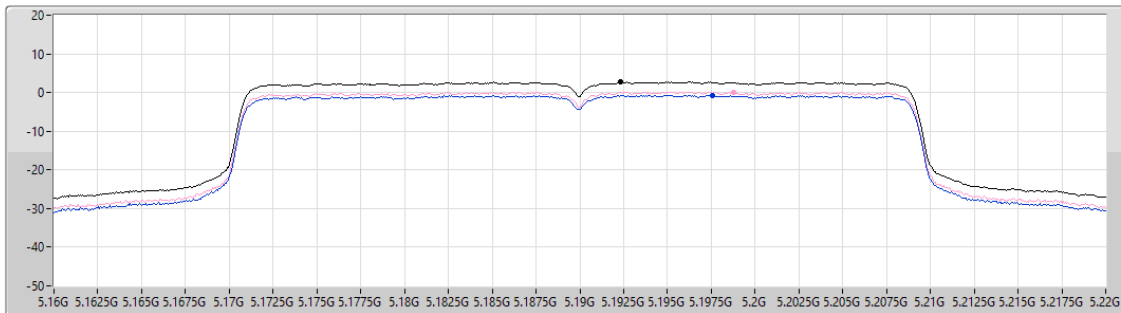

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.73	2.73	-0.68	0.17


Sum
Port 1
Port 2

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5230MHz

22/09/2025

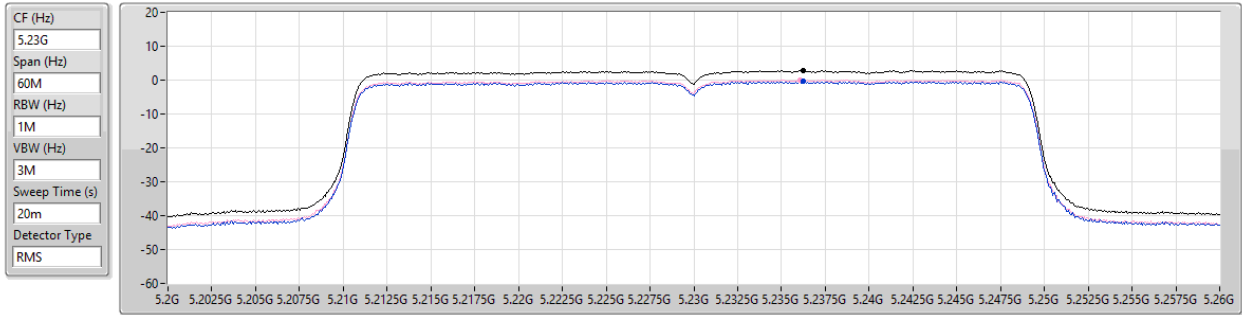


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.80	2.80	-0.38	0.05

5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5210MHz

22/09/2025

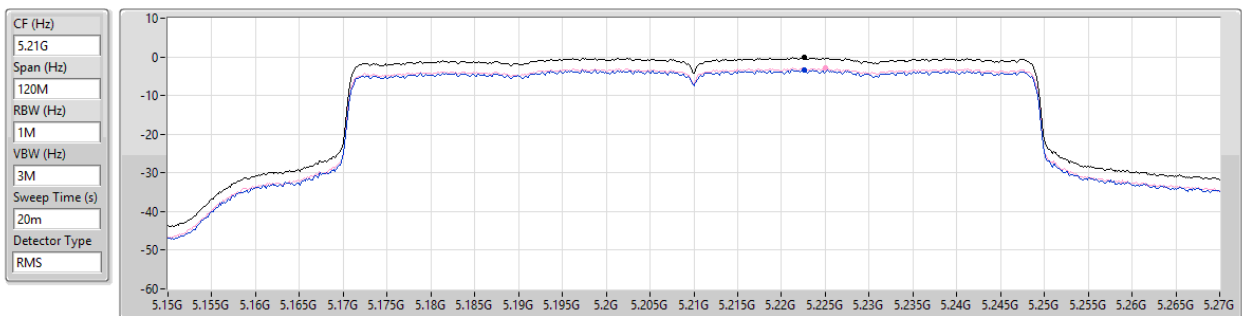

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.20	-0.20	-3.44	-2.91

Test Mode: Mode 43

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_4TX	6.27
802.11be EHT20_Nss1,(MCS0)_4TX	5.24
802.11be EHT40_Nss1,(MCS0)_4TX	2.35
802.11be EHT80_Nss1,(MCS0)_4TX	-0.55

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	9.56	-0.14	0.54	0.84	-0.28	6.18	13.44
5200MHz	Pass	9.56	-0.11	0.71	1.46	0.61	6.27	13.44
5240MHz	Pass	9.56	-0.01	0.63	0.83	0.15	6.21	13.44
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	9.56	-1.30	-0.96	-0.40	-1.48	4.87	13.44
5200MHz	Pass	9.56	-1.16	-0.81	-0.38	-0.46	5.24	13.44
5240MHz	Pass	9.56	-1.38	-0.79	-0.40	-0.51	5.11	13.44
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	9.56	-4.01	-3.68	-3.10	-3.63	2.35	13.44
5230MHz	Pass	9.56	-4.20	-3.75	-3.38	-3.34	2.26	13.44
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	9.56	-7.12	-6.68	-6.23	-5.81	-0.55	13.44


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5180MHz

22/09/2025

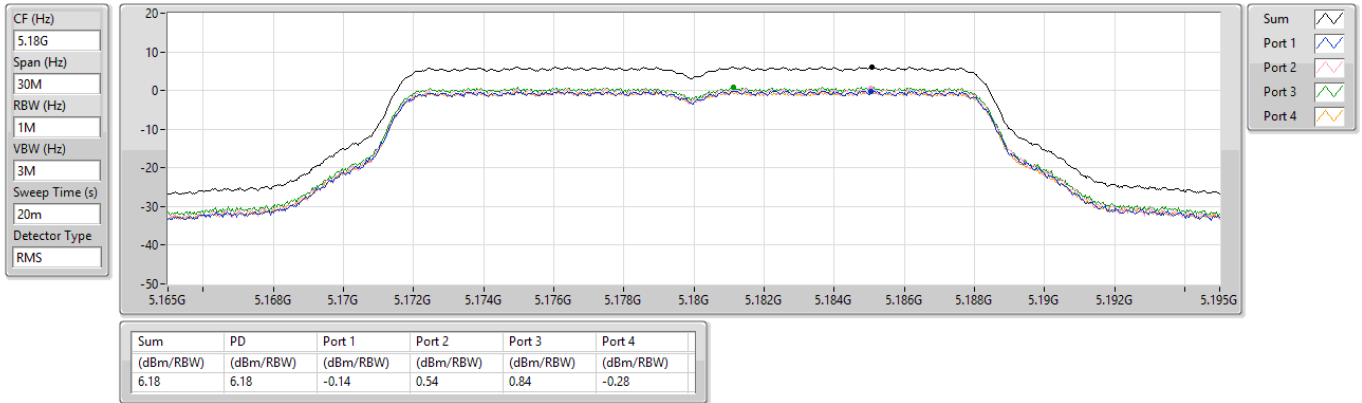


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5200MHz

22/09/2025

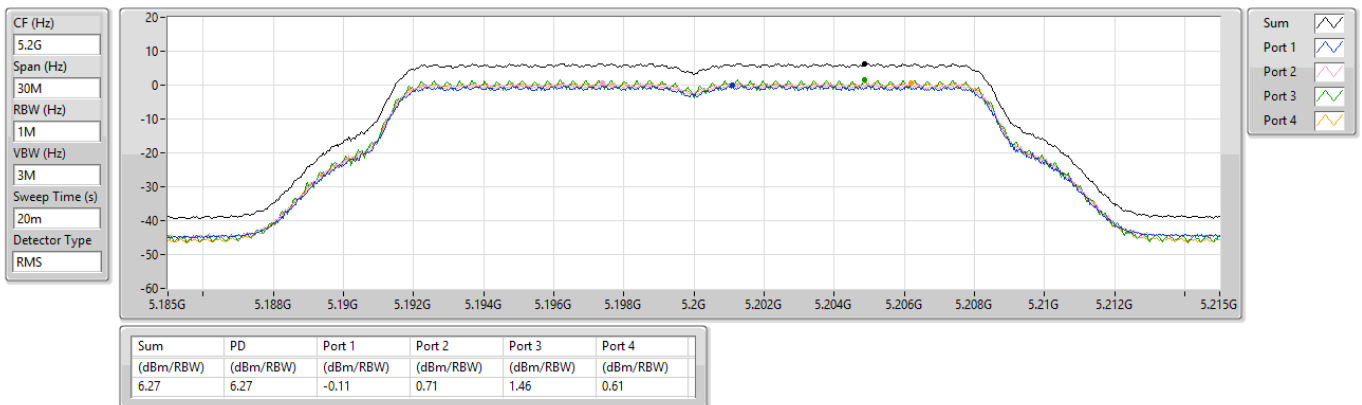


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5240MHz

22/09/2025

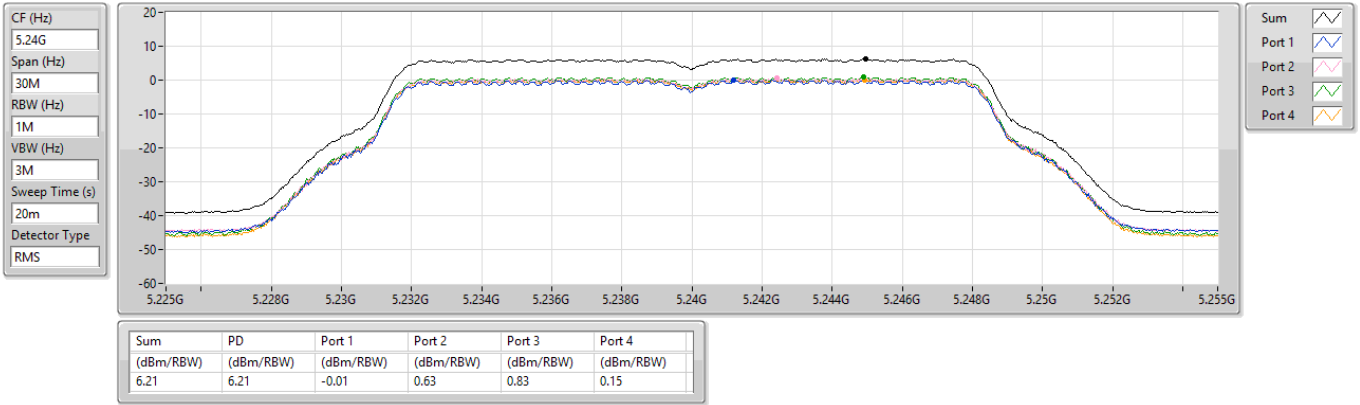


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5180MHz

22/09/2025

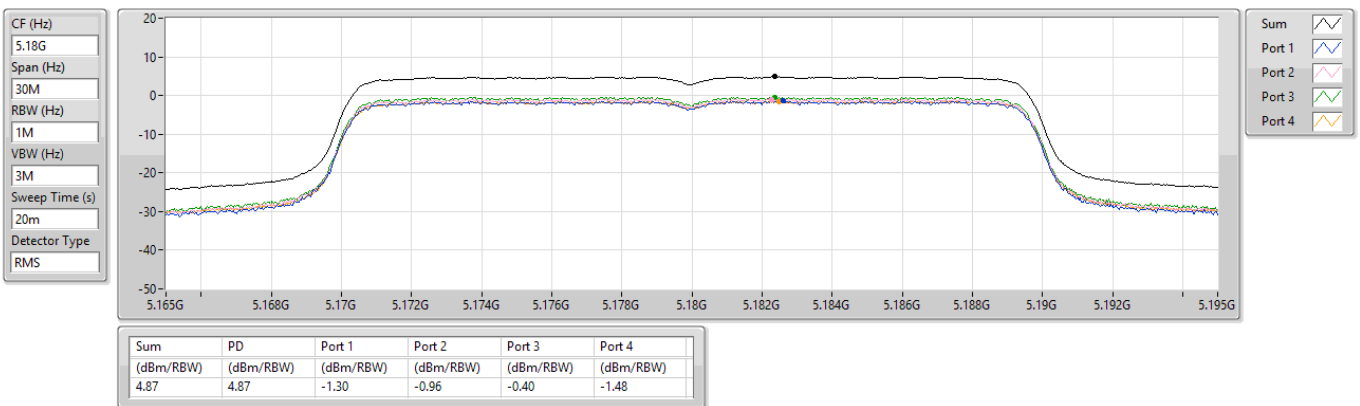


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5200MHz

22/09/2025

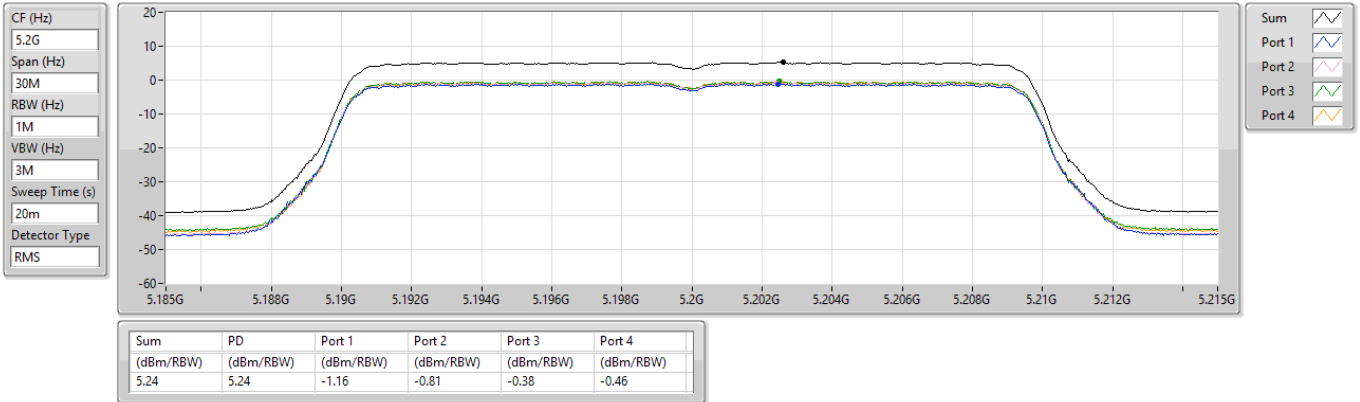


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5240MHz

22/09/2025

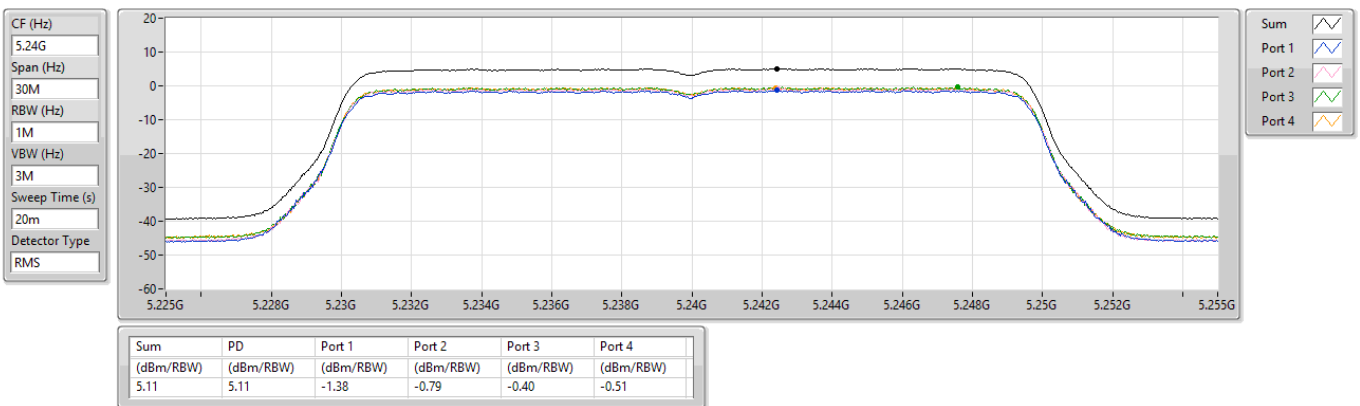


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5190MHz

22/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

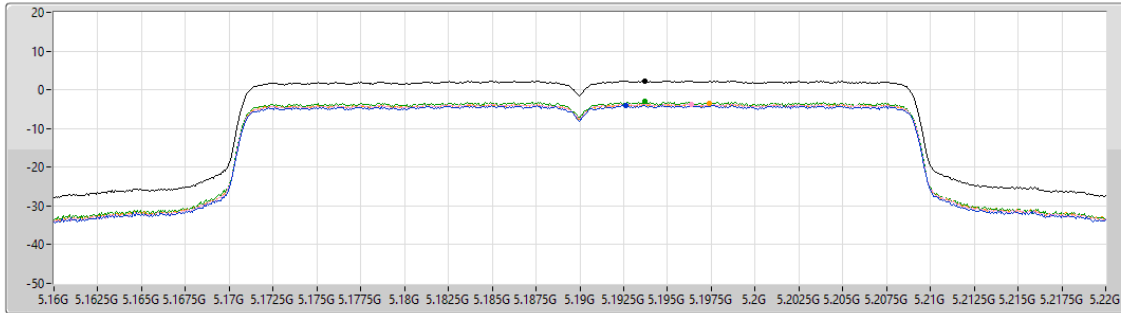

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.35	2.35	-4.01	-3.68	-3.10	-3.63


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5230MHz

22/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

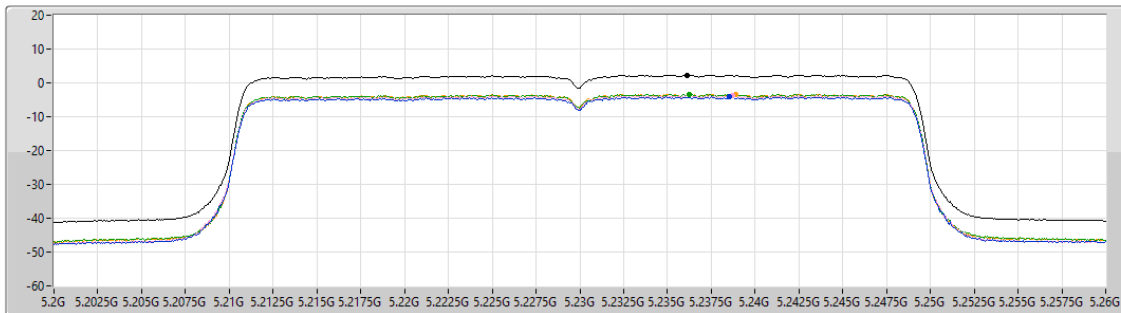


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.26	2.26	-4.20	-3.75	-3.38	-3.34

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5210MHz

22/09/2025

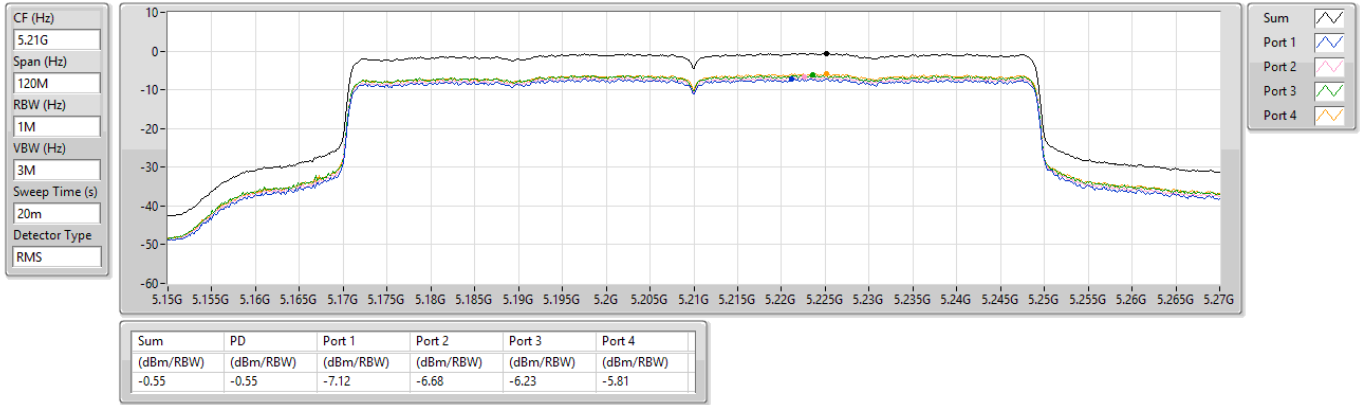

Test Mode: Mode 44

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT20_Nss4,(MCS0)_4TX	6.04
802.11be EHT40_Nss4,(MCS0)_4TX	3.05
802.11be EHT80_Nss4,(MCS0)_4TX	0.16

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.54	-0.60	-0.18	0.38	0.33	5.88	17.00
5200MHz	Pass	3.54	-0.65	-0.05	0.33	0.40	5.85	17.00
5240MHz	Pass	3.54	-0.44	0.10	0.44	0.42	6.04	17.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.54	-3.67	-3.19	-2.78	-2.78	2.81	17.00
5230MHz	Pass	3.54	-3.41	-3.10	-2.60	-2.36	3.05	17.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.54	-6.46	-6.21	-5.38	-5.16	0.16	17.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5180MHz

22/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

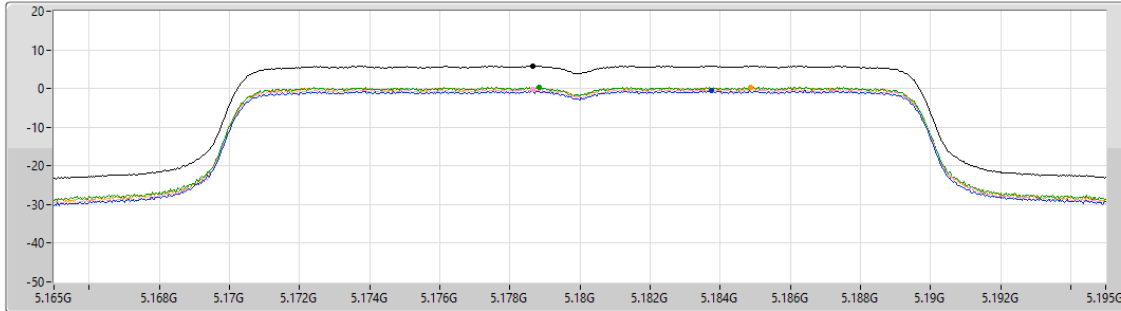

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
5.88	5.88	-0.60	-0.18	0.38	0.33


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5200MHz

22/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

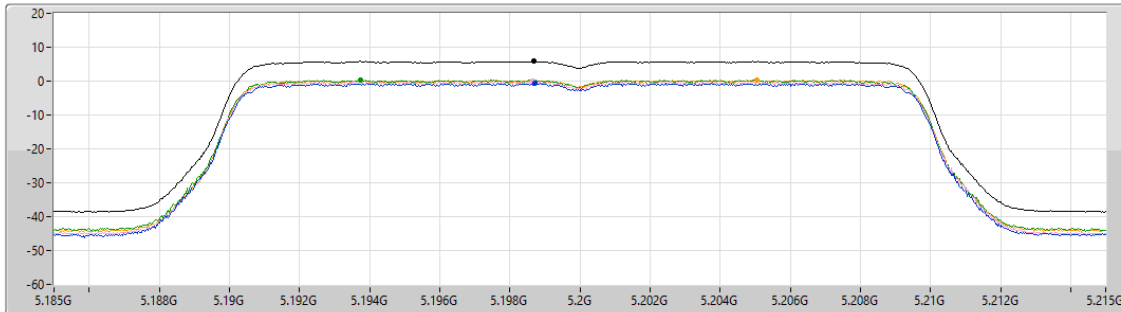


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
5.85	5.85	-0.65	-0.05	0.33	0.40

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5240MHz

22/09/2025

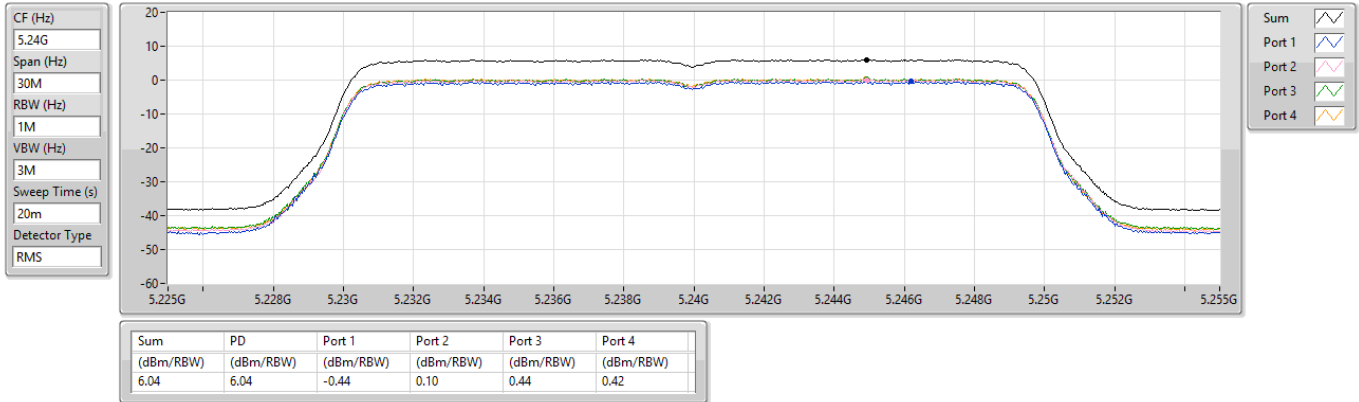


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5190MHz

22/09/2025

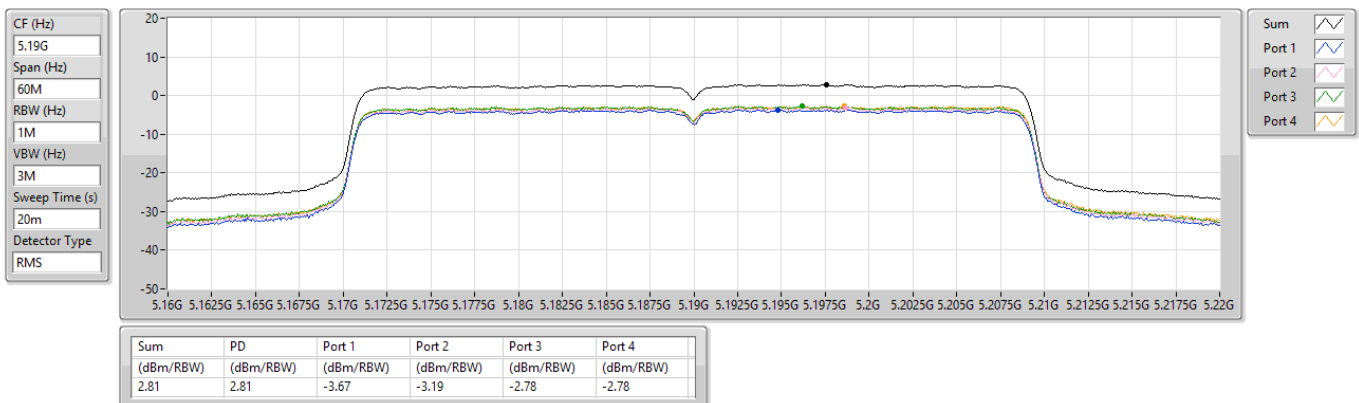


5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5230MHz

22/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

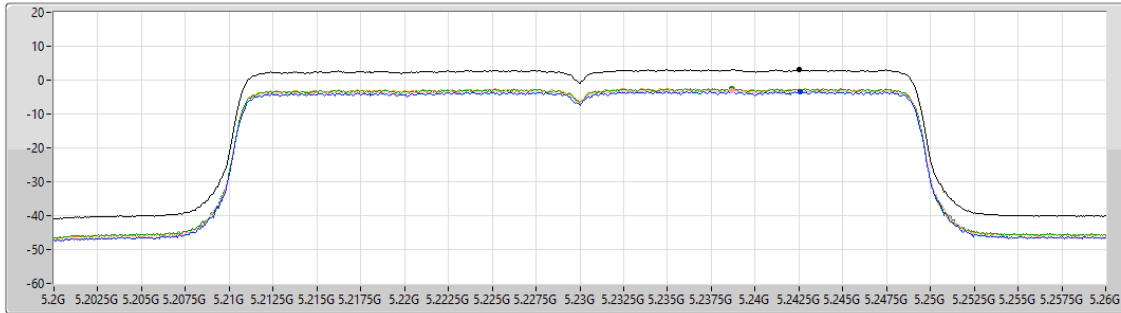

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.05	3.05	-3.41	-3.10	-2.60	-2.36

Sum
Port 1
Port 2
Port 3
Port 4


5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5210MHz

23/09/2025

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

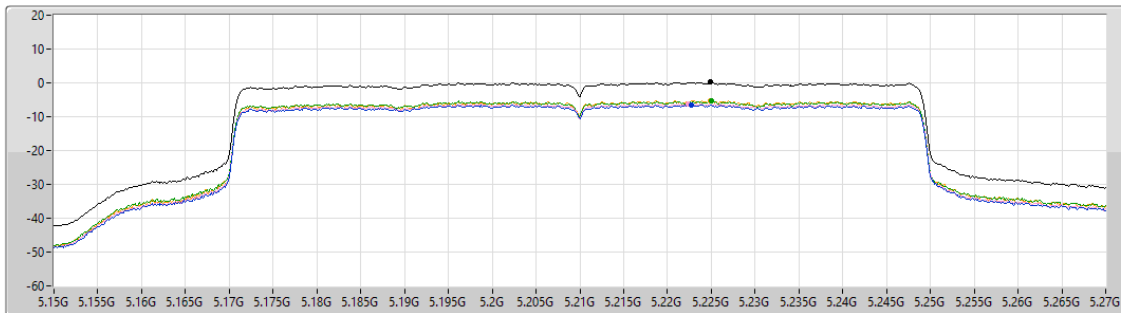

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.16	0.16	-6.46	-6.21	-5.38	-5.16

Sum
Port 1
Port 2
Port 3
Port 4

Test Mode: Mode 45

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	12.07
802.11be EHT20_Nss2,(MCS0)_2TX	12.71
802.11be EHT40_Nss2,(MCS0)_2TX	6.07
802.11be EHT80_Nss2,(MCS0)_2TX	1.15
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	14.46
802.11be EHT20_Nss2,(MCS0)_2TX	13.57
802.11be EHT40_Nss2,(MCS0)_2TX	8.19
802.11be EHT80_Nss2,(MCS0)_2TX	4.45

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.86	5.80	6.42	9.05	12.14
5200MHz	Pass	10.86	8.74	9.46	11.97	12.14
5240MHz	Pass	10.86	8.93	9.41	12.07	12.14
5745MHz	Pass	10.86	11.60	11.36	14.18	25.14
5785MHz	Pass	10.86	11.73	12.06	14.46	25.14
5825MHz	Pass	10.86	11.47	11.60	14.14	25.14
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.86	4.18	4.32	7.10	15.14
5200MHz	Pass	7.86	7.70	8.22	10.77	15.14
5240MHz	Pass	7.86	9.54	9.98	12.71	15.14
5745MHz	Pass	7.86	9.75	9.81	12.68	28.14
5785MHz	Pass	7.86	10.36	10.39	13.33	28.14
5825MHz	Pass	7.86	10.41	10.80	13.57	28.14
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.86	1.11	1.68	4.39	15.14
5230MHz	Pass	7.86	2.90	3.32	6.07	15.14
5755MHz	Pass	7.86	3.01	3.14	5.98	28.14
5795MHz	Pass	7.86	4.85	5.56	8.19	28.14
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.86	-2.19	-1.39	1.15	15.14
5775MHz	Pass	7.86	1.13	1.84	4.45	28.14


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5180MHz

17/09/2025

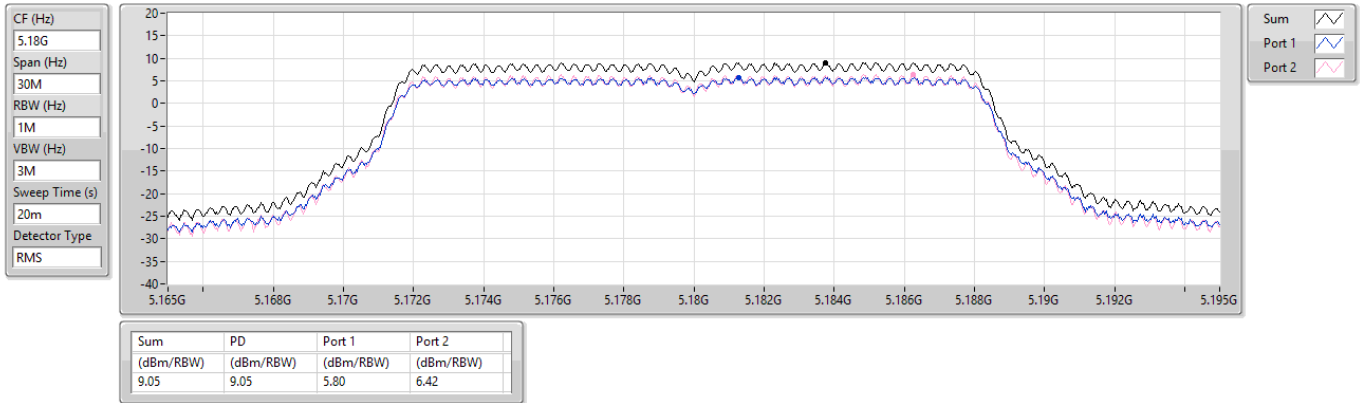


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

17/09/2025

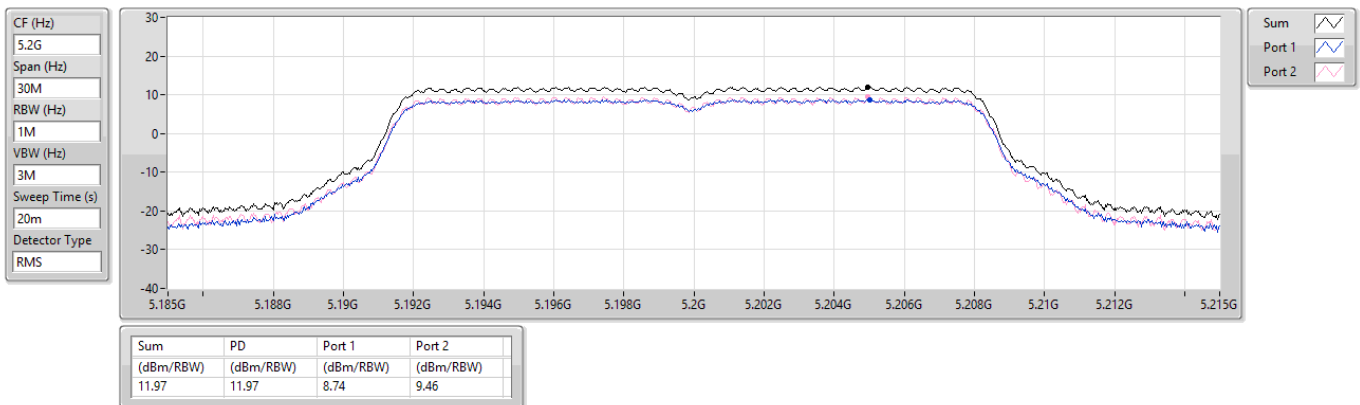


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

17/09/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

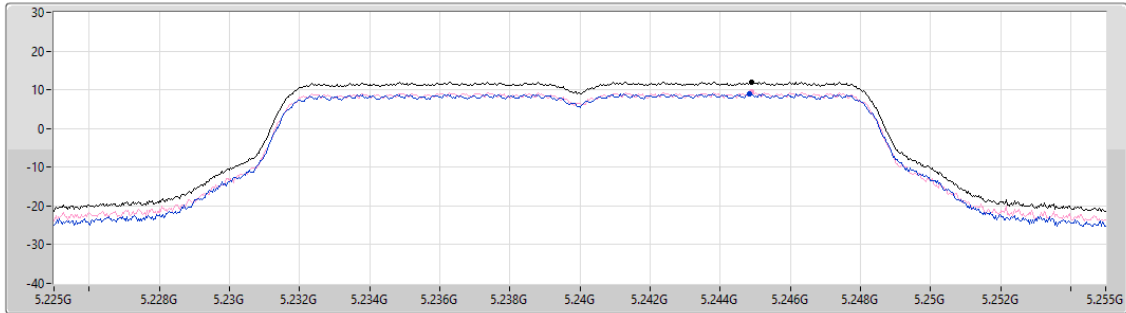

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
12.07	12.07	8.93	9.41

Sum
Port 1
Port 2


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5745MHz

17/09/2025

CF (Hz)
5.745G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

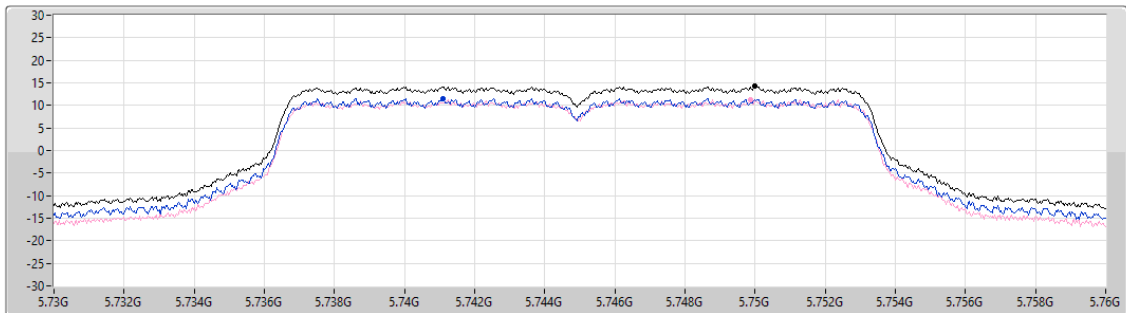

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
14.18	14.18	11.60	11.36

Sum
Port 1
Port 2


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5785MHz

17/09/2025

CF (Hz)
5.785G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

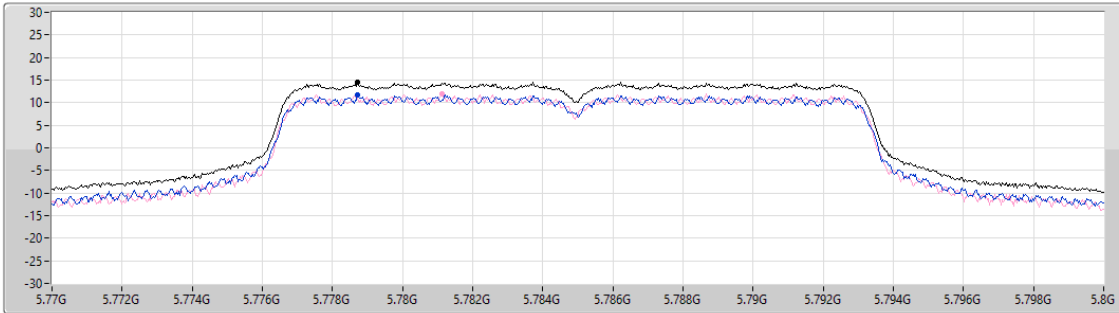

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
14.46	14.46	11.73	12.06


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5825MHz

17/09/2025

CF (Hz)
5.825G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

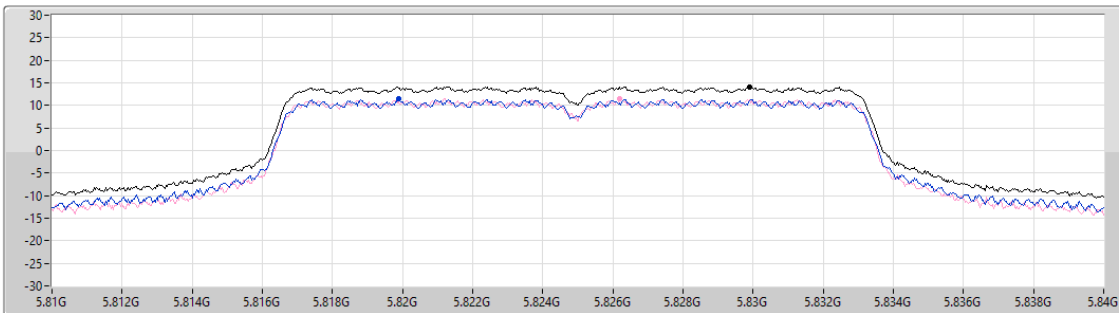

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
14.14	14.14	11.47	11.60


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5180MHz

17/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

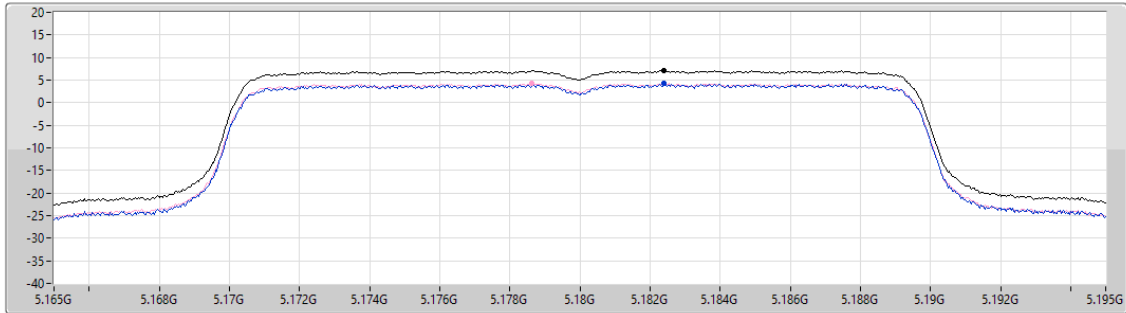

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5200MHz

17/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

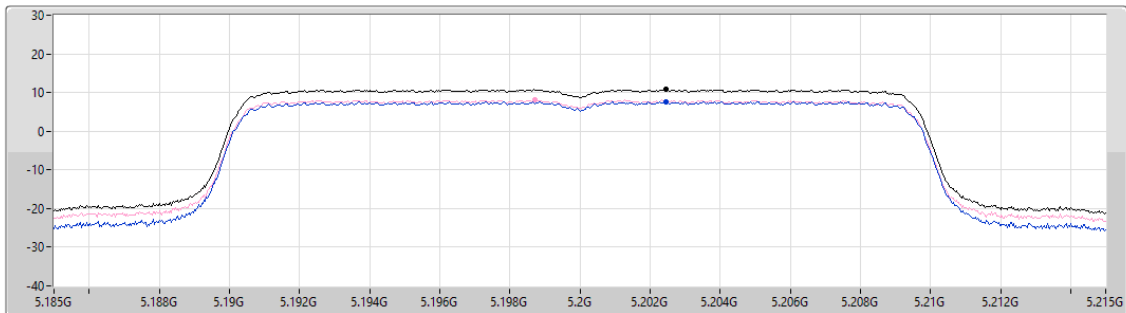

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5240MHz

17/09/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

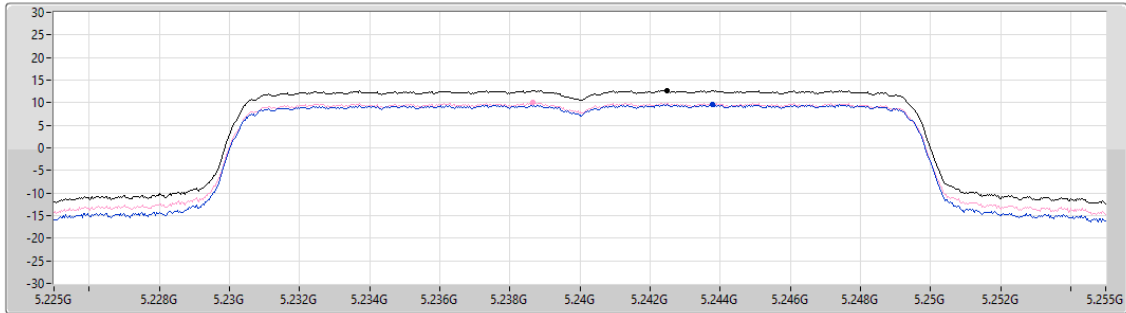

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
12.71	12.71	9.54	9.98

Sum
Port 1
Port 2


5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5745MHz

17/09/2025

CF (Hz)
5.745G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

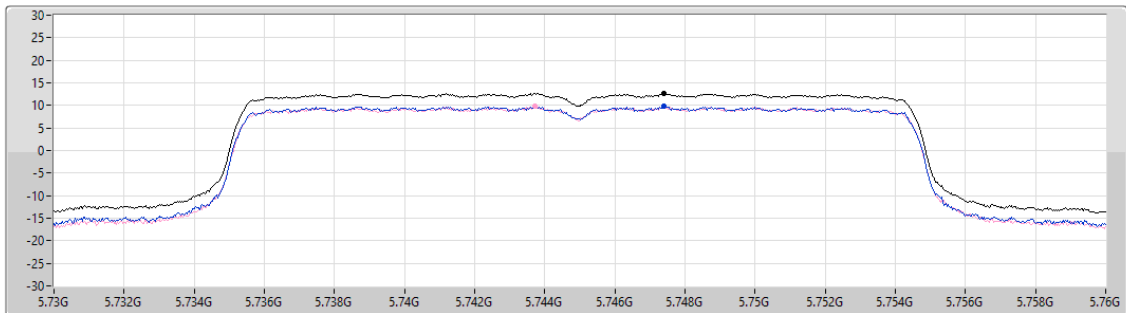

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
12.68	12.68	9.75	9.81

Sum
Port 1
Port 2

5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5785MHz

17/09/2025

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

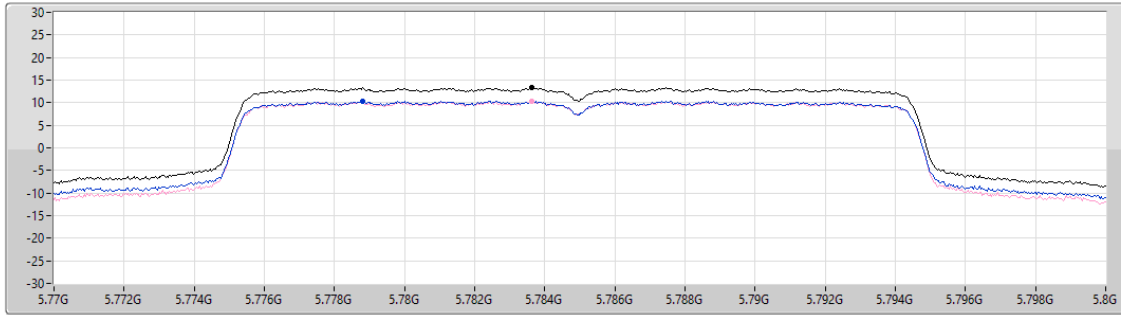

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
13.33	13.33	10.36	10.39

5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5825MHz

17/09/2025

CF (Hz)
5.825G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

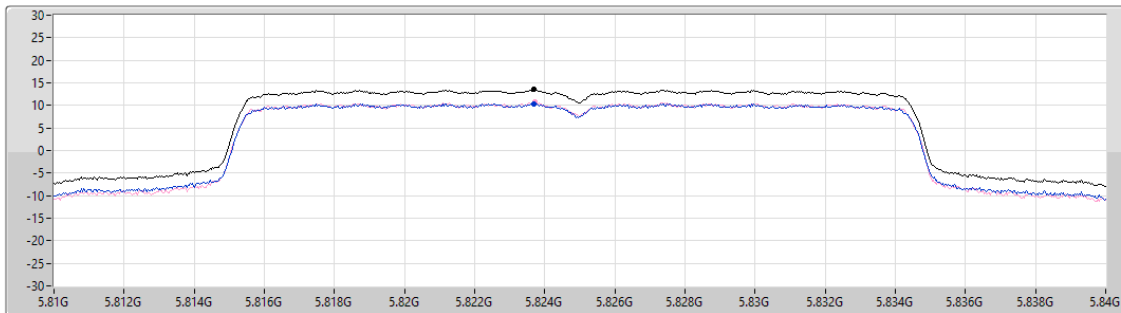

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
13.57	13.57	10.41	10.80

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5190MHz

17/09/2025

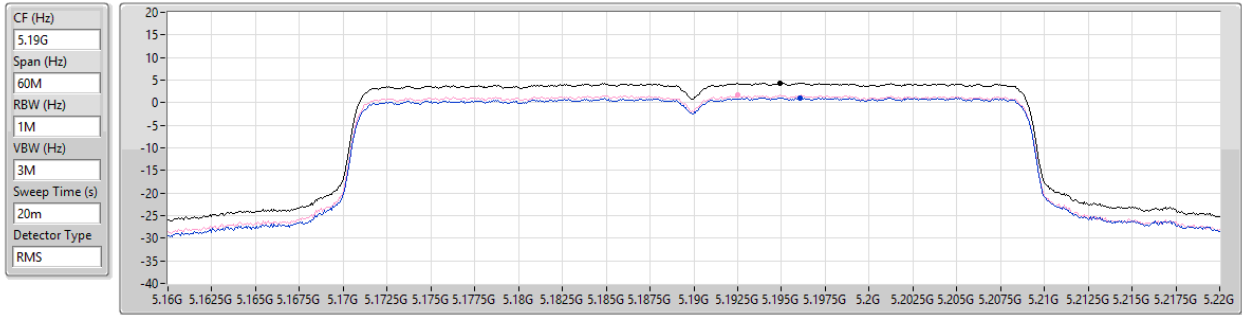


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.39	4.39	1.11	1.68

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5230MHz

17/09/2025

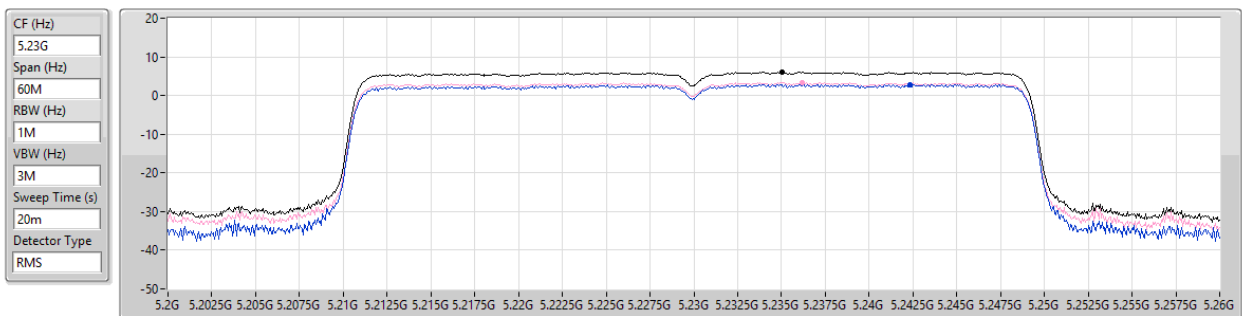

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.07	6.07	2.90	3.32


5.725-5.85GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5755MHz

17/09/2025

CF (Hz)
5.755G
Span (Hz)
60M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

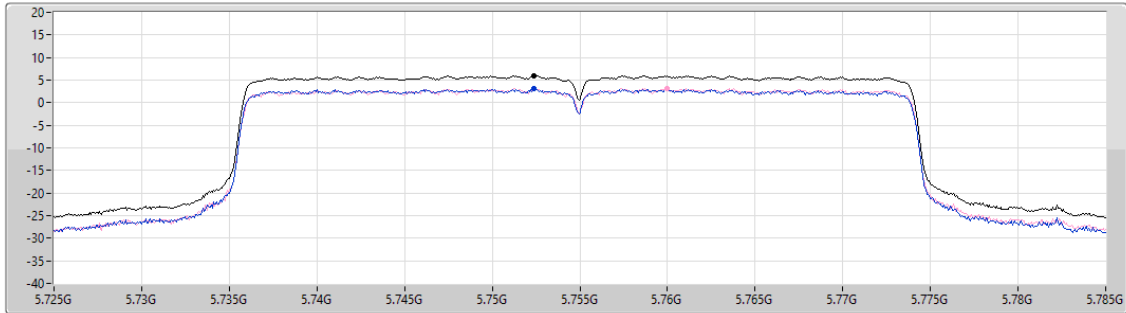

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.98	5.98	3.01	3.14


5.725-5.85GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5795MHz

17/09/2025

CF (Hz)
5.795G
Span (Hz)
60M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

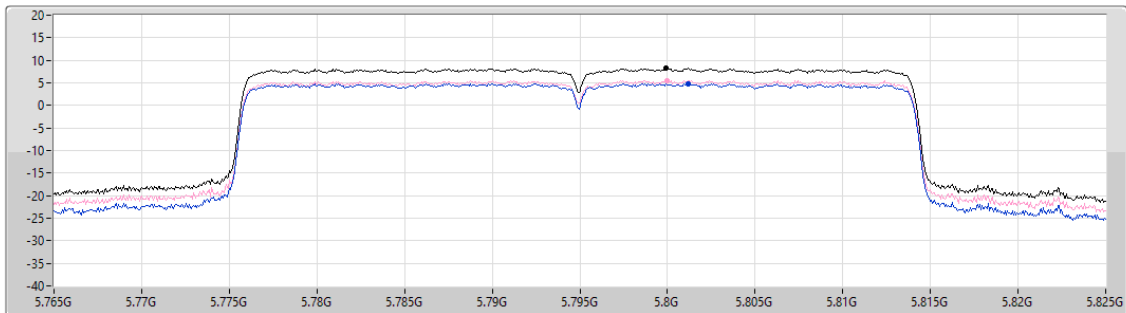

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.19	8.19	4.85	5.56

5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5210MHz

17/09/2025

CF (Hz)
5.21G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

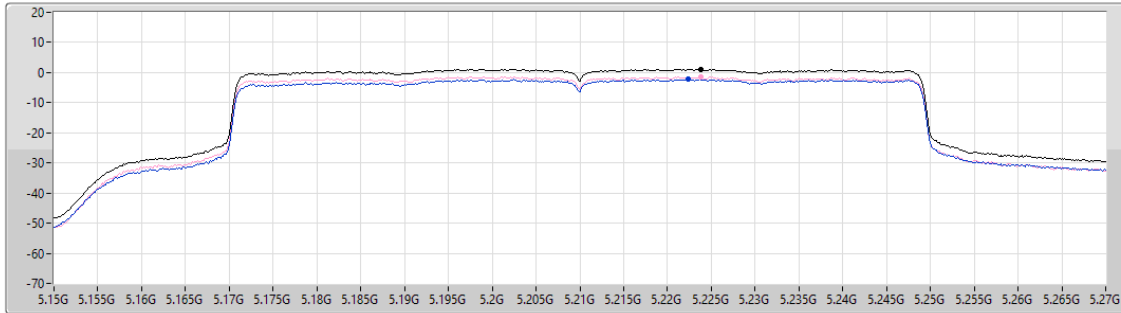

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.15	1.15	-2.19	-1.39

5.725-5.85GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5775MHz

17/09/2025

CF (Hz)
5.775G


Span (Hz)
120M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

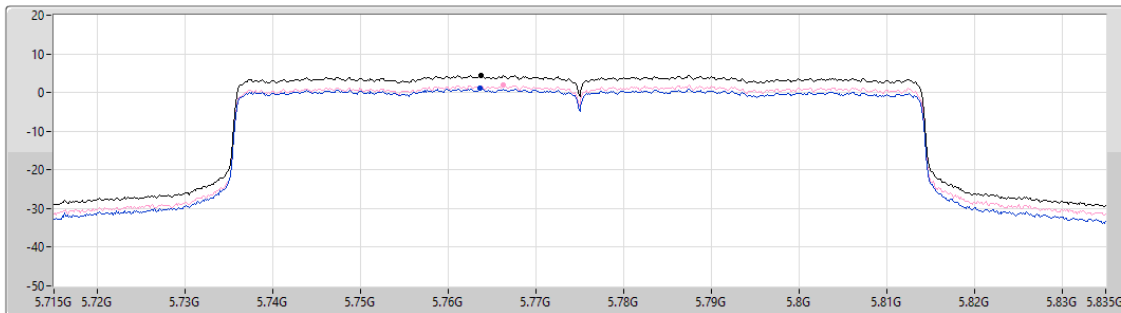

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.45	4.45	1.13	1.84



Test Mode: Mode 46

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	3.99

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.86	1.26	1.00	3.99	12.14
5200MHz	Pass	10.86	1.15	0.43	3.62	12.14
5240MHz	Pass	10.86	1.20	0.53	3.54	12.14

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5180MHz

02/10/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

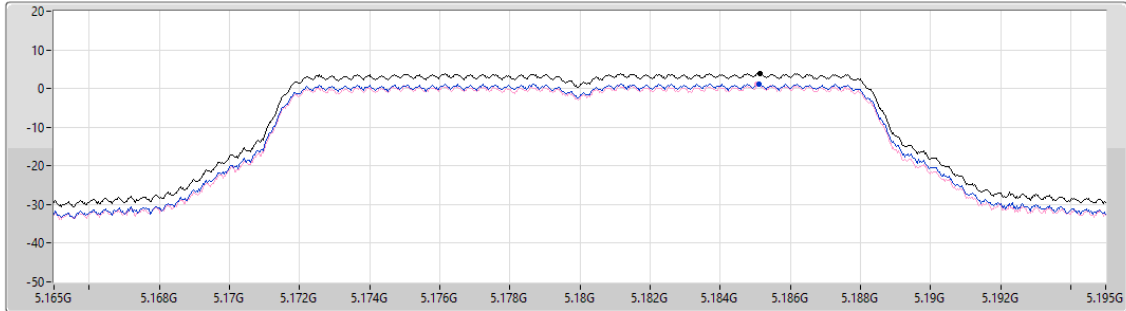

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.99	3.99	1.26	1.00


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

02/10/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

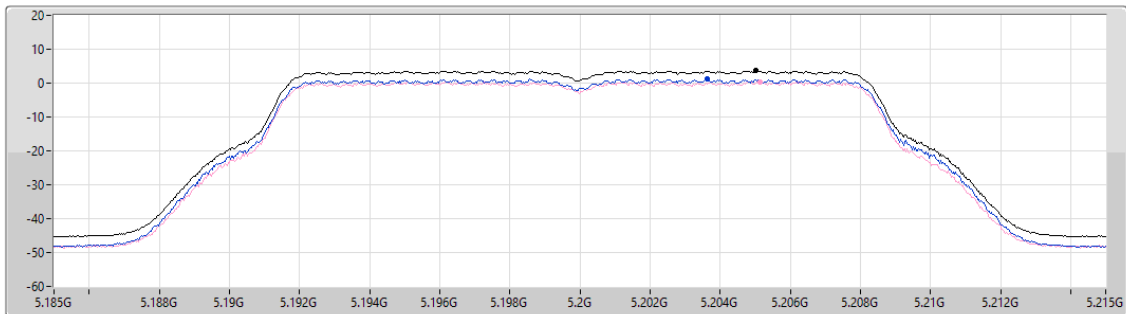

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.62	3.62	1.15	0.43

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

02/10/2025

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

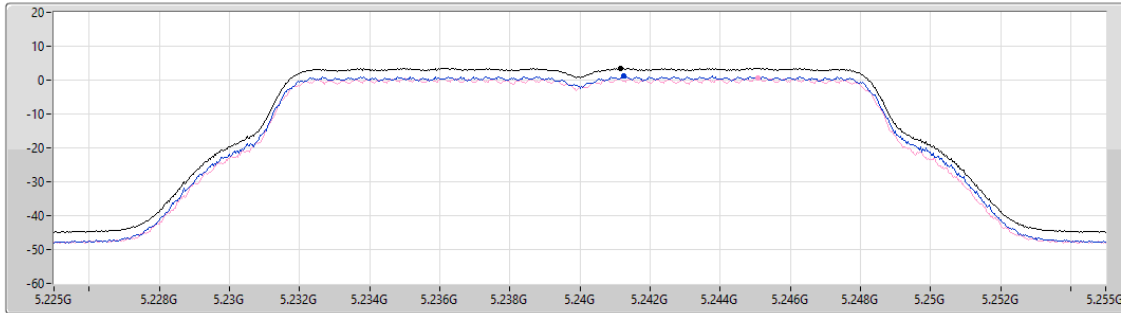

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.54	3.54	1.20	0.53

Test Mode: Mode 47

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT20_Nss2,(MCS0)_2TX	3.13
802.11be EHT40_Nss2,(MCS0)_2TX	0.15
802.11be EHT80_Nss2,(MCS0)_2TX	-2.75

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.86	0.27	-0.21	3.03	15.14
5200MHz	Pass	7.86	0.53	-0.27	3.13	15.14
5240MHz	Pass	7.86	0.37	-0.30	2.93	15.14
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.86	-2.42	-3.25	0.10	15.14
5230MHz	Pass	7.86	-2.36	-3.20	0.15	15.14
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.86	-5.43	-5.94	-2.75	15.14

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5180MHz

02/10/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

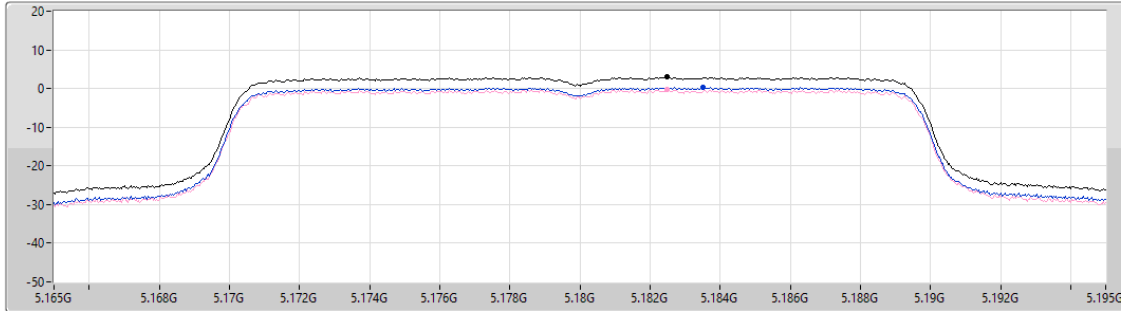

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.03	3.03	0.27	-0.21

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5200MHz

02/10/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

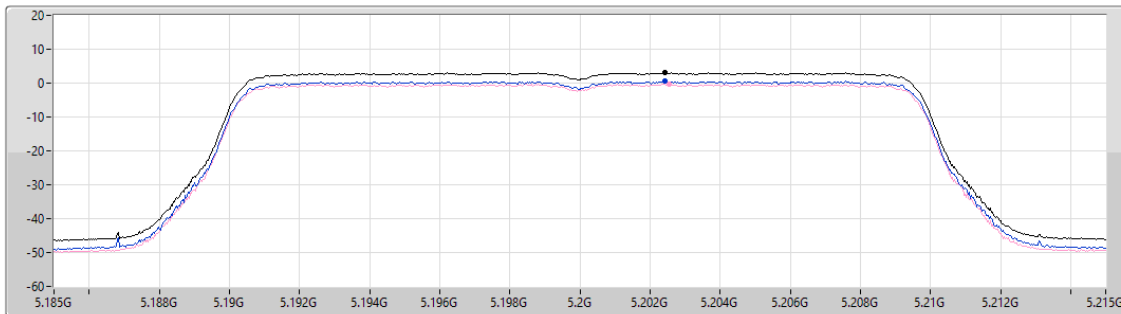

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.13	3.13	0.53	-0.27

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5240MHz

02/10/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

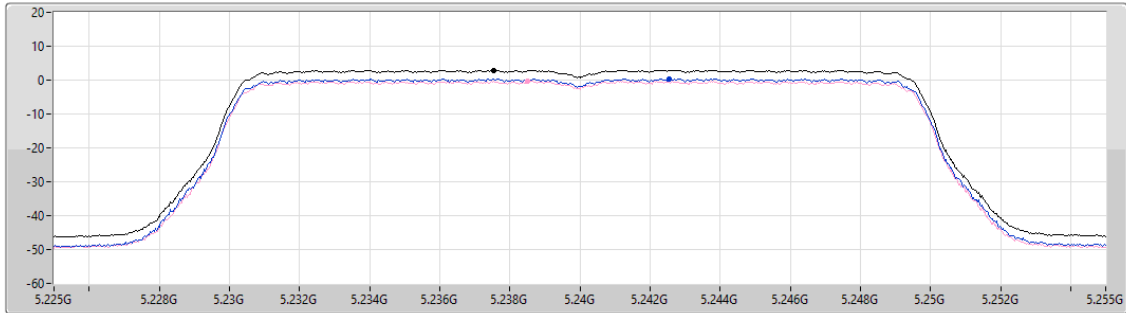

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.93	2.93	0.37	-0.30

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5190MHz

02/10/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

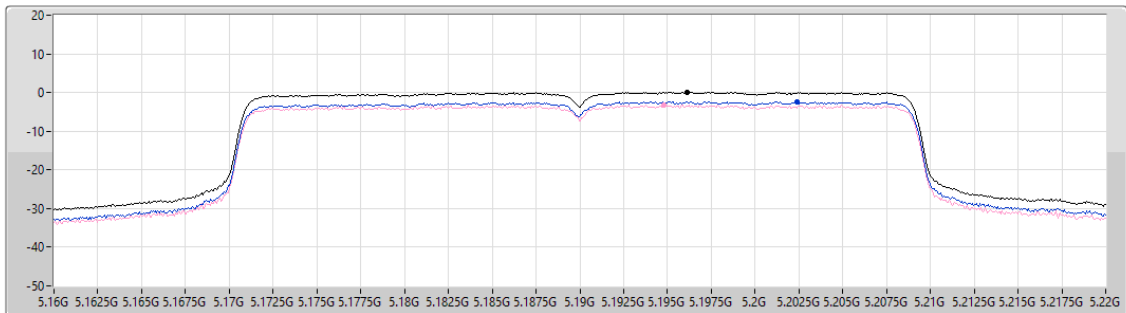

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.10	0.10	-2.42	-3.25

Sum
Port 1
Port 2

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5230MHz

02/10/2025

CF (Hz)
5.23G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

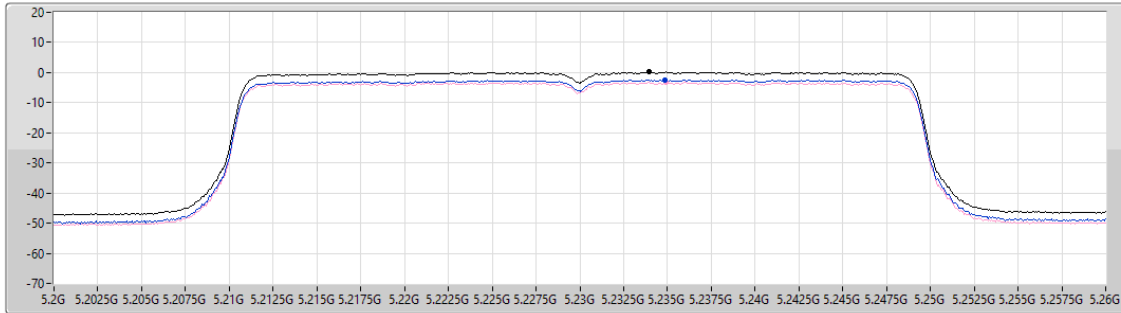

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.15	0.15	-2.36	-3.20

5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5210MHz

02/10/2025

CF (Hz)
5.21G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

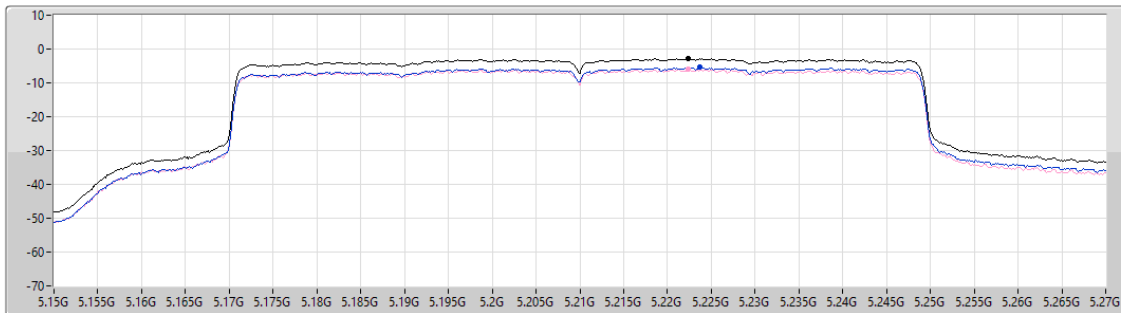

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.75	-2.75	-5.43	-5.94

Test Mode: Mode 48

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	2.01

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	10.86	-0.80	-0.83	2.01	12.14
5200MHz	Pass	10.86	-1.19	-0.64	1.89	12.14
5240MHz	Pass	10.86	-0.93	-1.17	1.86	12.14

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5180MHz

22/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

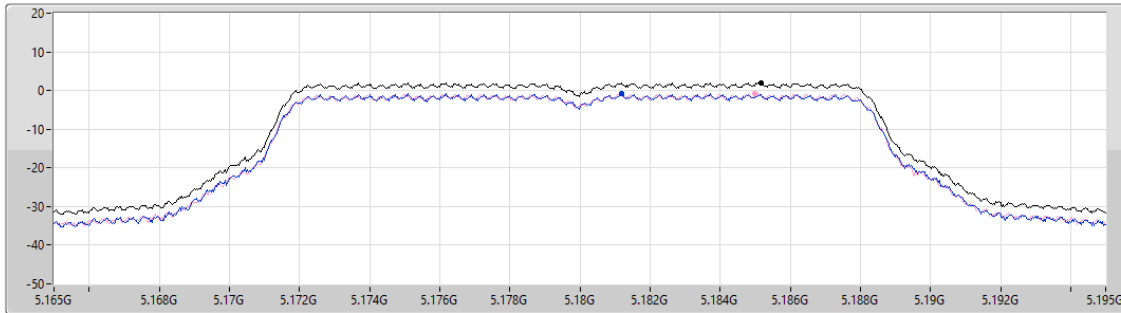

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.01	2.01	-0.80	-0.83

Sum
Port 1
Port 2


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

22/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

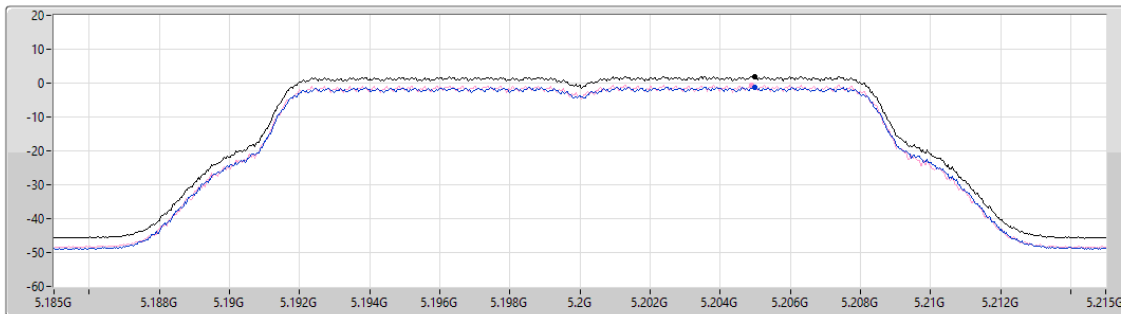

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.89	1.89	-1.19	-0.64


Sum
Port 1
Port 2

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

22/09/2025

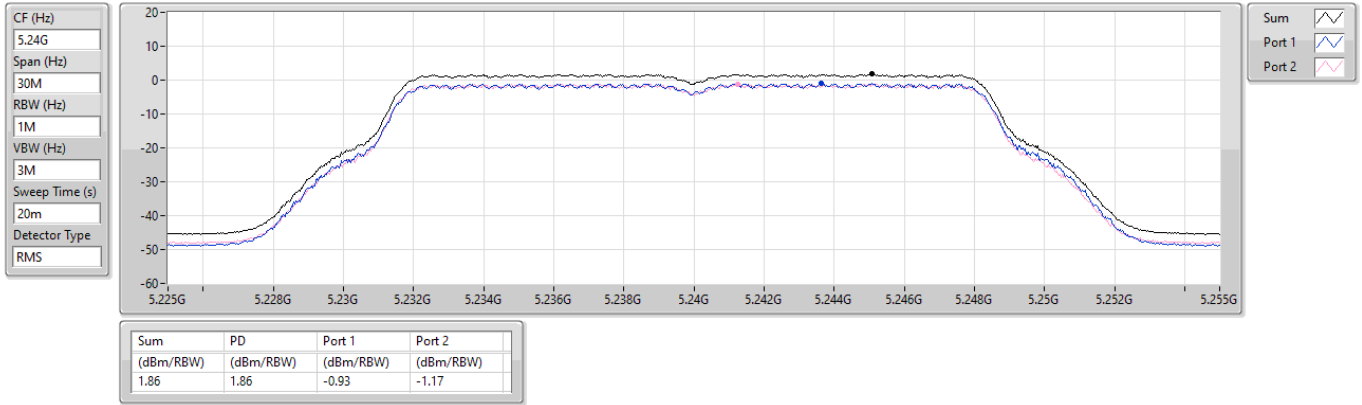

Test Mode: Mode 49

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT20_Nss2,(MCS0)_2TX	0.90
802.11be EHT40_Nss2,(MCS0)_2TX	-2.03
802.11be EHT80_Nss2,(MCS0)_2TX	-4.87

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.86	-2.14	-1.98	0.90	15.14
5200MHz	Pass	7.86	-2.23	-1.85	0.87	15.14
5240MHz	Pass	7.86	-2.17	-2.21	0.76	15.14
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.86	-5.12	-4.80	-2.03	15.14
5230MHz	Pass	7.86	-5.10	-4.85	-2.13	15.14
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.86	-8.18	-7.53	-4.87	15.14

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5180MHz

22/09/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

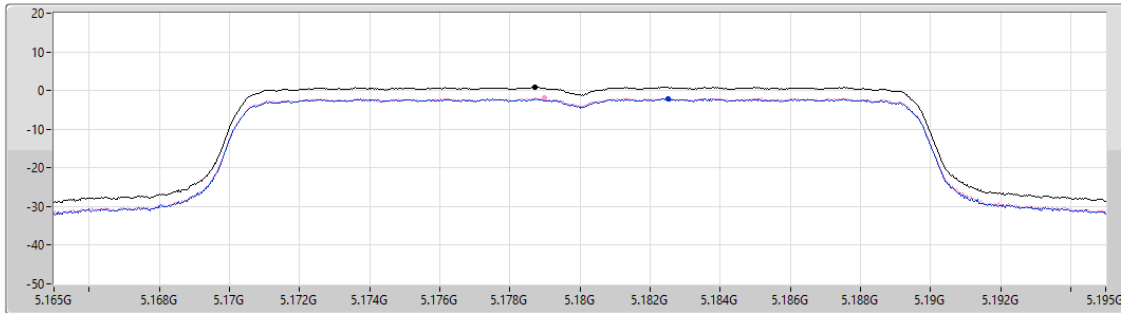

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
0.90	0.90	-2.14	-1.98

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5200MHz

22/09/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

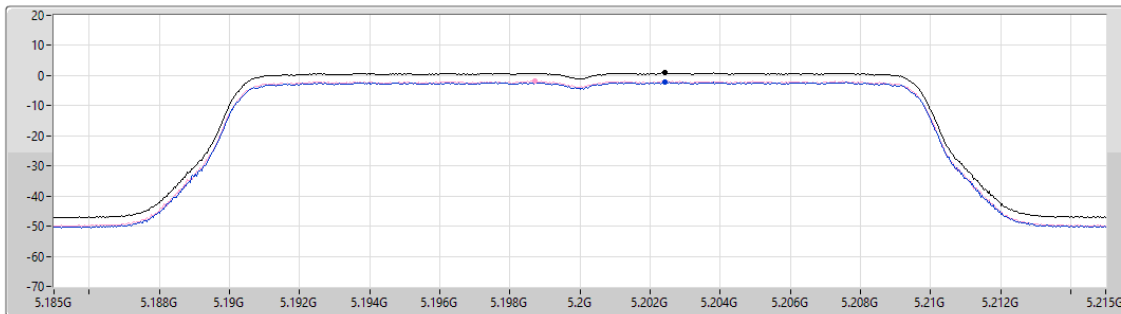

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
0.87	0.87	-2.23	-1.85

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5240MHz

22/09/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

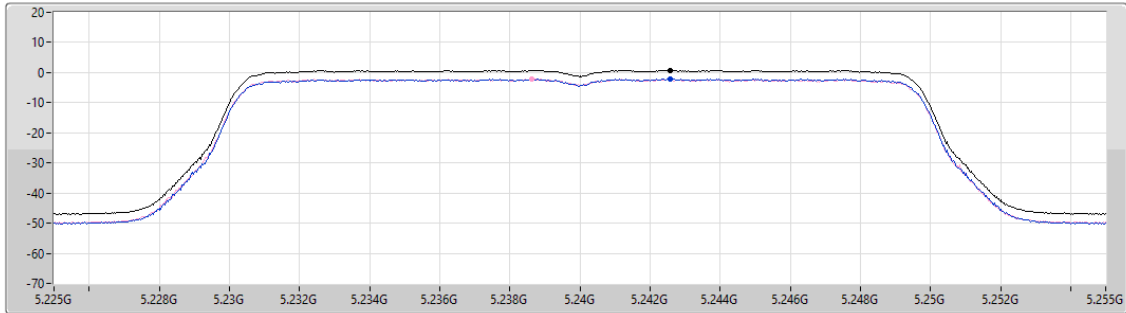

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
0.76	0.76	-2.17	-2.21

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5190MHz

22/09/2025

CF (Hz)
5.19G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

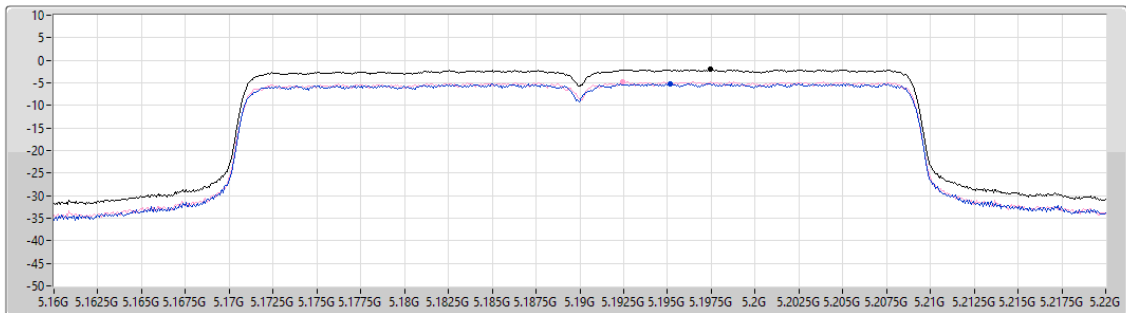

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
-2.03	-2.03	-5.12	-4.80

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5230MHz

22/09/2025

CF (Hz)
5.23G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

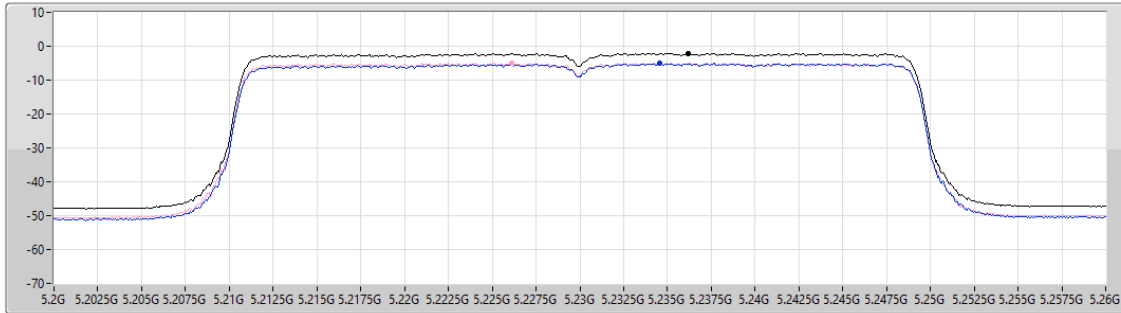

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.13	-2.13	-5.10	-4.85

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5210MHz

22/09/2025

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

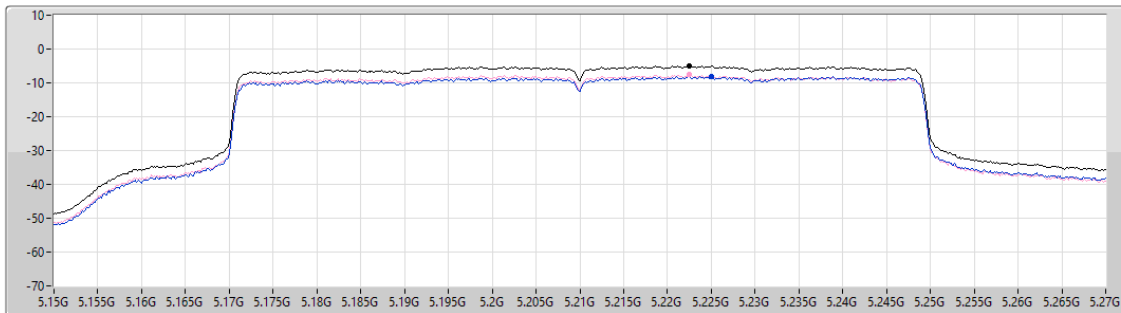

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.87	-4.87	-8.18	-7.53

Sum
Port 1
Port 2




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	870.02M	42.66	46.00	-3.34	Vertical

Mode 1

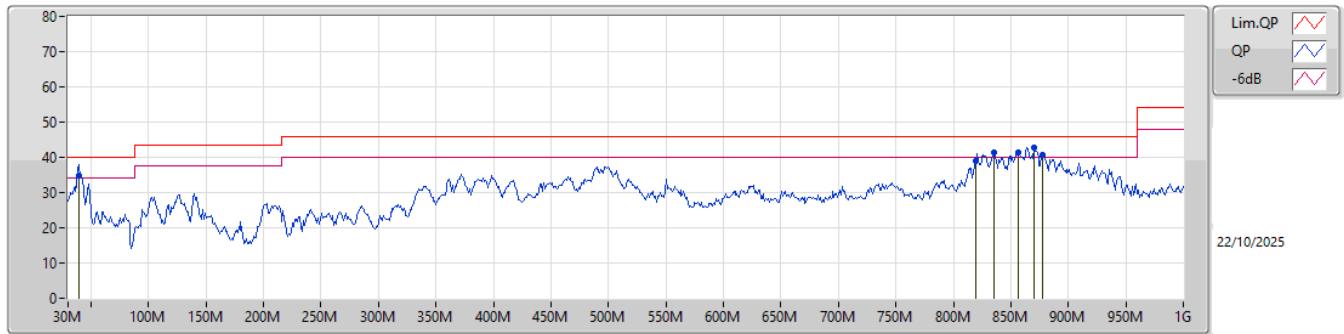

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	39.7M	34.81	40.00	-5.19	-12.15	3	Vertical	2	1.00	-	46.96	18.98	0.59	31.72		
PK	819.58M	39.08	46.00	-6.92	-4.00	3	Vertical	81	1.25	-	43.08	25.73	2.97	32.70		
PK	835.1M	41.55	46.00	-4.45	-3.73	3	Vertical	81	1.25	-	45.28	25.89	3.01	32.63		
PK	856.44M	41.54	46.00	-4.46	-3.31	3	Vertical	296	2.00	-	44.85	26.19	3.06	32.56		
PK	870.02M	42.66	46.00	-3.34	-3.19	3	Vertical	46	1.25	"Worst"	45.85	26.27	3.09	32.55		
PK	877.78M	40.85	46.00	-5.15	-3.11	3	Vertical	28	1.25	-	43.96	26.33	3.11	32.55		

Mode 1

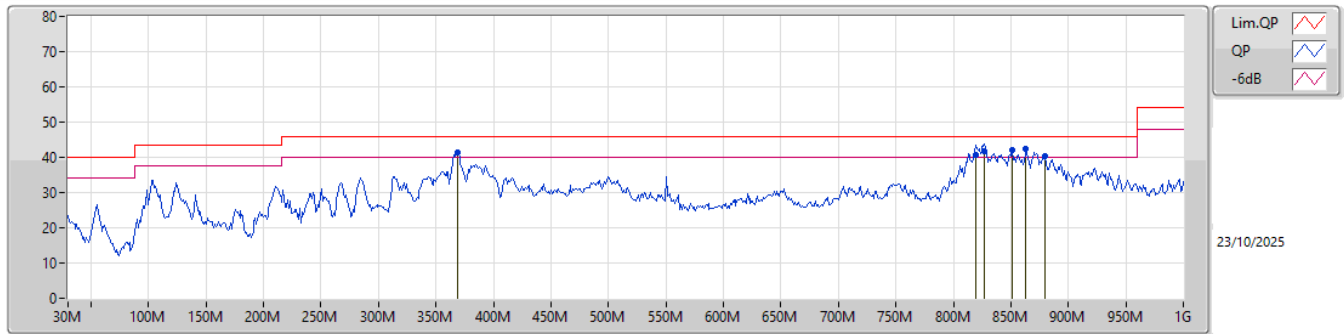

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	368.53M	41.23	46.00	-4.77	-9.40	3	Horizontal	30	1.00	-	50.63	20.83	1.91	32.14		
QP	819.58M	40.54	46.00	-5.46	-4.00	3	Horizontal	240	2.00	-	44.54	25.73	2.97	32.70		
QP	827.34M	41.65	46.00	-4.35	-3.84	3	Horizontal	239	1.00	-	45.49	25.83	2.99	32.66		
PK	851.59M	42.11	46.00	-3.89	-3.39	3	Horizontal	309	1.25	-	45.50	26.13	3.04	32.56		
PK	863.23M	42.49	46.00	-3.51	-3.29	3	Horizontal	205	1.00	"Worst"	45.78	26.19	3.07	32.55		
PK	879.72M	40.36	46.00	-5.64	-3.12	3	Horizontal	304	1.00	-	43.48	26.32	3.11	32.55		




Test Mode: Mode 1

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1(6Mbps)_4TX	Pass	AV	5.1426G	53.95	54.00	-0.05	3	Vertical	360	1.80	93

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

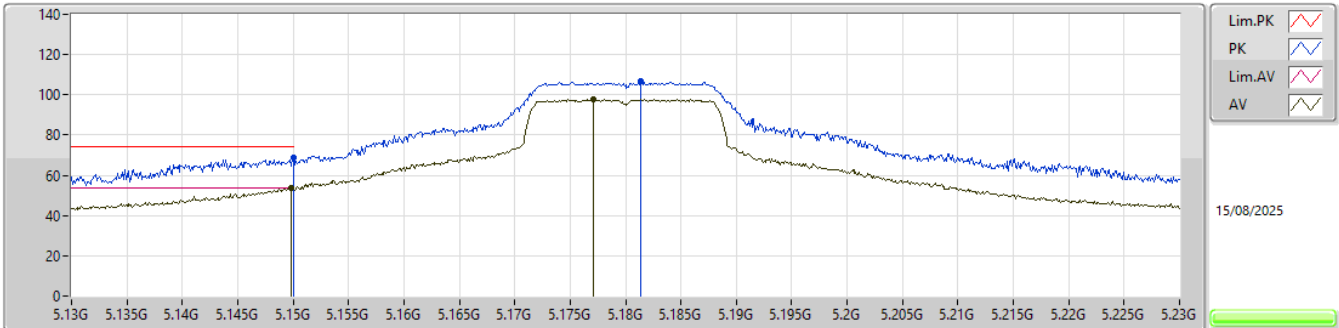


EUT_Y_1TX
SET 85
80\100\76\88\82\85
5.23\ -6.96\8.13\ -2.39\1.57\0.12

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.15G	68.58	74.00	-5.42	61.68	3	Vertical	0	1.80	85	32.80	6.64	32.54				
AV	5.1498G	53.88	54.00	-0.12	46.98	3	Vertical	0	1.80	85	32.80	6.64	32.54				
PK	5.1814G	106.71	Inf	-Inf	99.76	3	Vertical	0	1.80	85	32.86	6.63	32.54				
AV	5.1771G	97.75	Inf	-Inf	90.81	3	Vertical	0	1.80	85	32.85	6.63	32.54				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

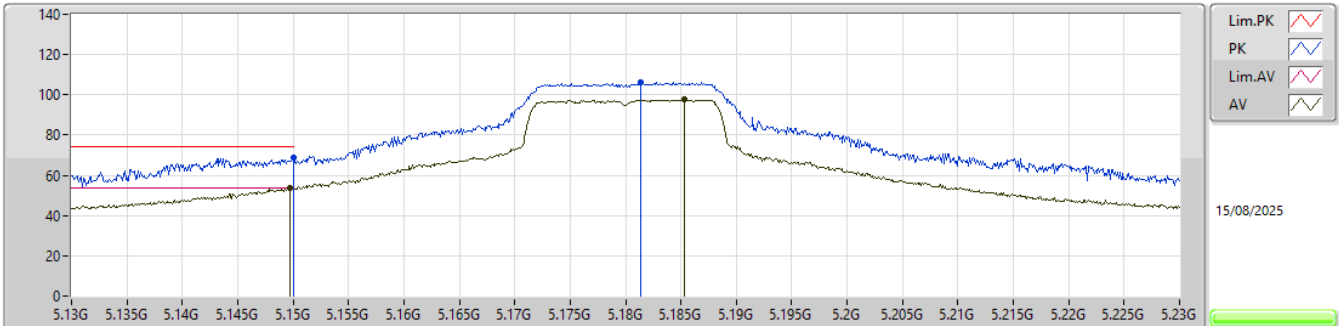


EUT_Y_1TX
SET85
85
0.15

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	69.02	74.00	-4.98	62.12	3	Horizontal	0	1.05	85	32.80	6.64	32.54			
AV	5.1497G	53.85	54.00	-0.15	46.95	3	Horizontal	0	1.05	85	32.80	6.64	32.54			
PK	5.1814G	106.39	Inf	-Inf	99.44	3	Horizontal	0	1.05	85	32.86	6.63	32.54			
AV	5.1853G	97.52	Inf	-Inf	90.56	3	Horizontal	0	1.05	85	32.87	6.63	32.54			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

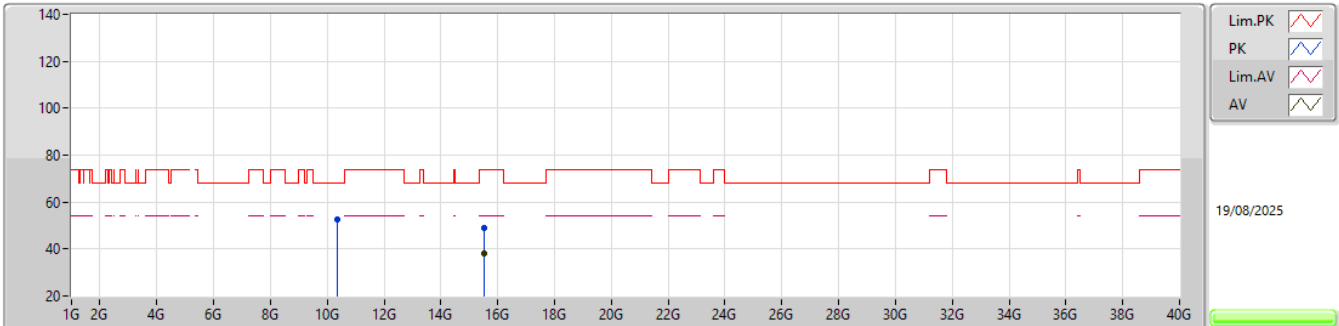


EUT_Y_1TX
Setting 85
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3564G	52.34	68.20	-15.86	68.80	3	Vertical	313	1.86	-	39.20	11.01	66.67			
PK	15.53589G	48.91	74.00	-25.09	60.77	3	Vertical	346	2.17	-	38.86	13.10	63.82			
AV	15.54147G	37.88	54.00	-16.12	49.78	3	Vertical	346	2.17	-	38.83	13.10	63.83			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

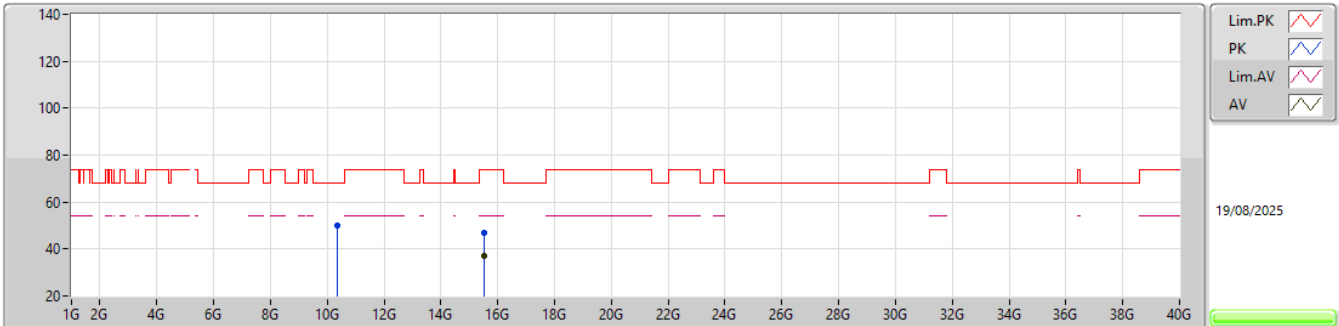


EUT_Y_1TX
Setting 85
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35637G	49.92	68.20	-18.28	66.38	3	Horizontal	308	2.28	-	39.20	11.01	66.67			
PK	15.5388G	47.07	74.00	-26.93	58.95	3	Horizontal	55	1.83	-	38.84	13.10	63.82			
AV	15.53358G	36.89	54.00	-17.11	48.75	3	Horizontal	55	1.83	-	38.87	13.09	63.82			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

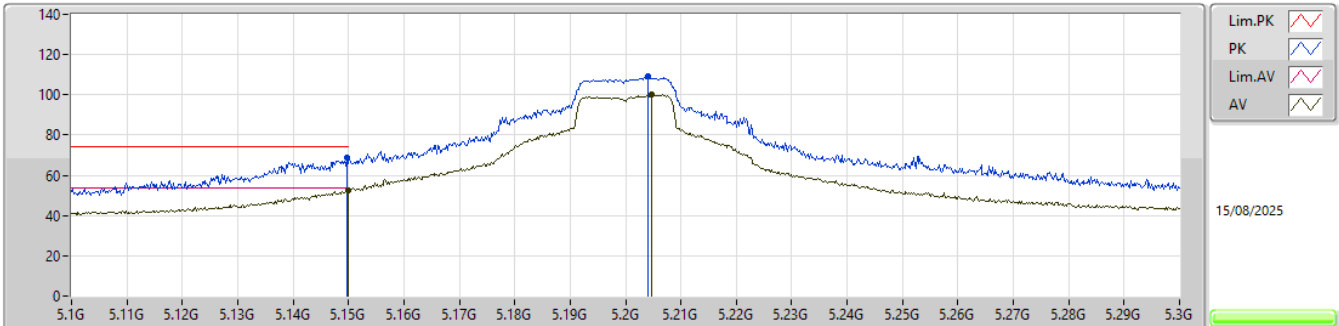


EUT_Y_1TX
SET 108
80\108
11.81\1.64

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1498G	68.79	74.00	-5.21	61.89	3	Vertical	2	1.80	108	32.80	6.64	32.54			
AV	5.15G	52.36	54.00	-1.64	45.46	3	Vertical	2	1.80	108	32.80	6.64	32.54			
PK	5.204G	108.95	Inf	-Inf	101.95	3	Vertical	2	1.80	108	32.90	6.63	32.53			
AV	5.2048G	99.89	Inf	-Inf	92.89	3	Vertical	2	1.80	108	32.90	6.63	32.53			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

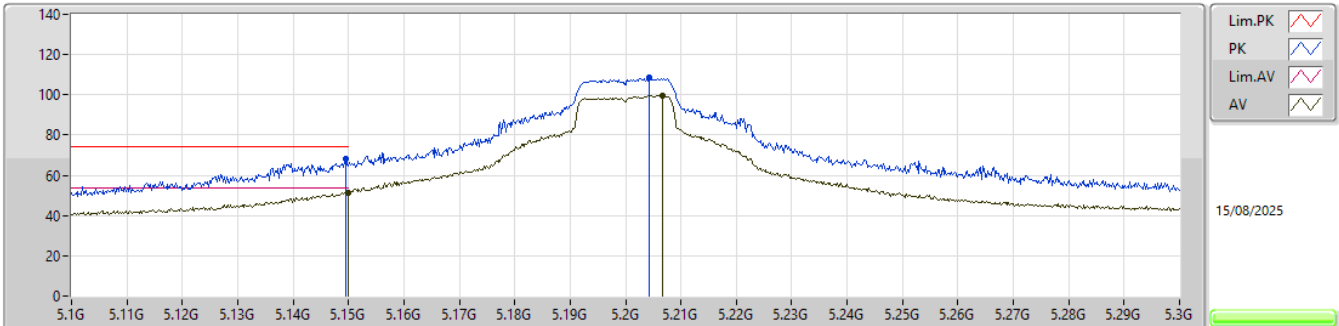


EUT Y_1TX
SET 108
108
2.63

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1496G	67.98	74.00	-6.02	61.08	3	Horizontal	360	1.80	108	32.80	6.64	32.54				
AV	5.15G	51.37	54.00	-2.63	44.47	3	Horizontal	360	1.80	108	32.80	6.64	32.54				
PK	5.2042G	108.71	Inf	-Inf	101.71	3	Horizontal	360	1.80	108	32.90	6.63	32.53				
AV	5.2066G	99.61	Inf	-Inf	92.61	3	Horizontal	360	1.80	108	32.90	6.63	32.53				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

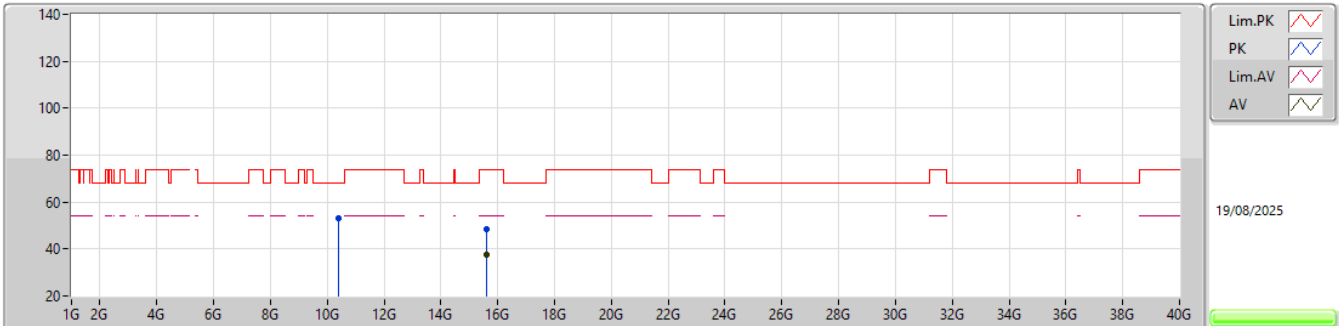


EUT_Y_1TX
Setting 108
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39646G	52.96	68.20	-15.24	69.41	3	Vertical	307	1.80	-	39.20	11.04	66.69			
PK	15.59958G	48.29	74.00	-25.71	60.20	3	Vertical	338	1.81	-	38.80	13.14	63.85			
AV	15.60066G	37.73	54.00	-16.27	49.64	3	Vertical	338	1.81	-	38.80	13.14	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

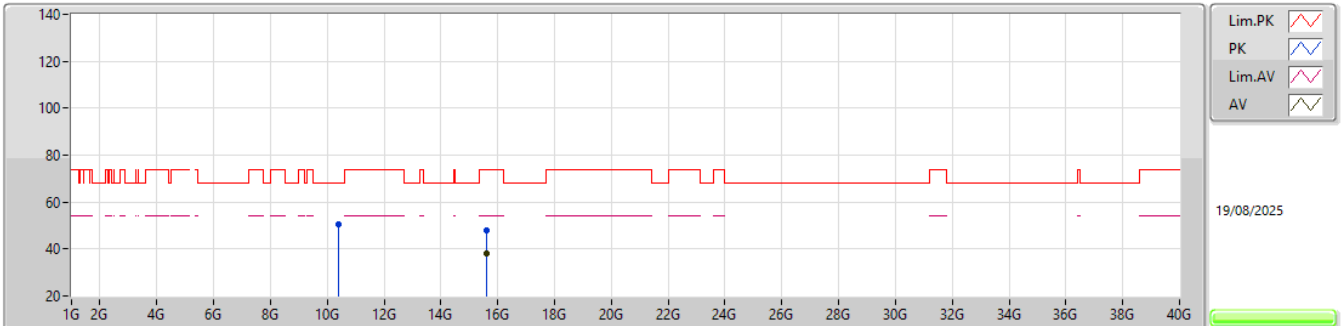


EUT_Y_1TX
Setting 108
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39637G	50.37	68.20	-17.83	66.82	3	Horizontal	310	2.23	-	39.20	11.04	66.69			
PK	15.60294G	48.16	74.00	-25.84	60.06	3	Horizontal	345	1.78	-	38.81	13.14	63.85			
AV	15.60381G	38.01	54.00	-15.99	49.91	3	Horizontal	345	1.78	-	38.81	13.14	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

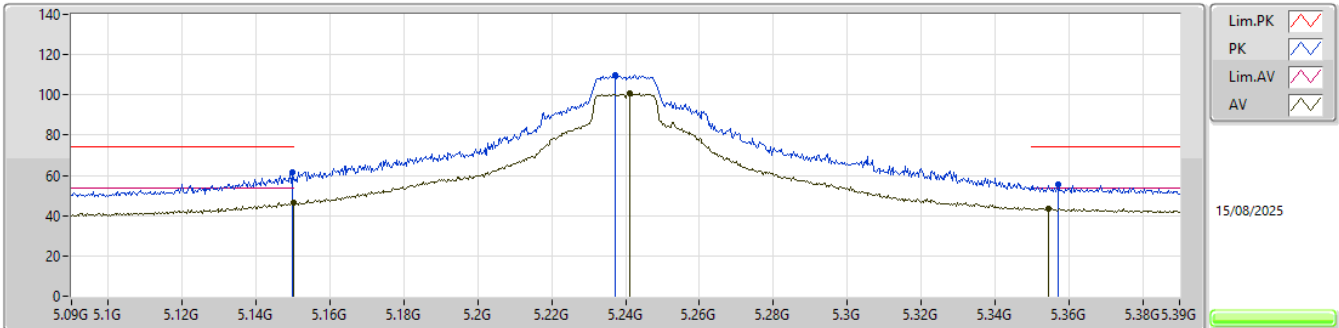


EUT_Y_1TX
SET 108
80\108
11.34\7.79

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1497G	61.62	74.00	-12.38	54.72	3	Vertical	4	1.80	108	32.80	6.64	32.54			
AV	5.15G	46.21	54.00	-7.79	39.31	3	Vertical	4	1.80	108	32.80	6.64	32.54			
PK	5.2373G	109.95	Inf	-Inf	102.92	3	Vertical	4	1.80	108	32.90	6.65	32.52			
AV	5.2412G	100.49	Inf	-Inf	93.46	3	Vertical	4	1.80	108	32.90	6.65	32.52			
PK	5.3573G	55.33	74.00	-18.67	47.98	3	Vertical	4	1.80	108	33.13	6.71	32.49			
AV	5.3546G	43.70	54.00	-10.30	36.36	3	Vertical	4	1.80	108	33.12	6.71	32.49			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

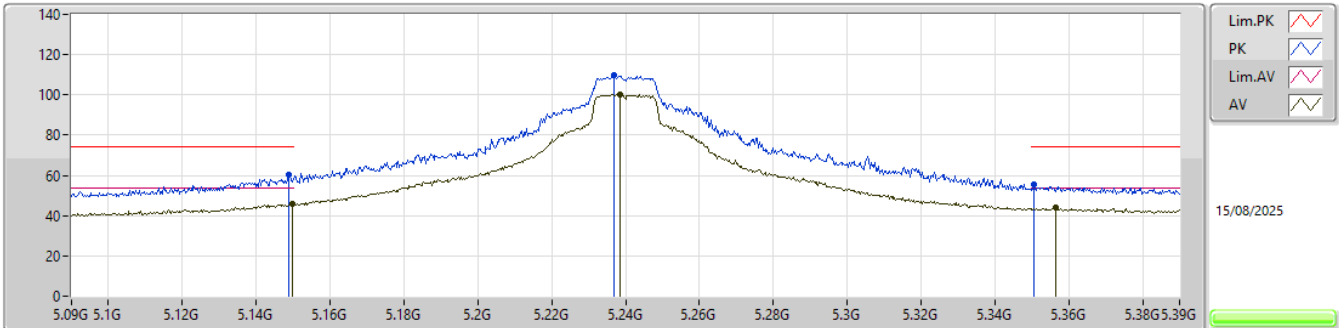


EUT_Y_1TX
SET 108
108
7.99

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1488G	60.38	74.00	-13.62	53.48	3	Horizontal	0	1.06	108	32.80	6.64	32.54			
AV	5.1497G	46.01	54.00	-7.99	39.11	3	Horizontal	0	1.06	108	32.80	6.64	32.54			
PK	5.237G	109.78	Inf	-Inf	102.75	3	Horizontal	0	1.06	108	32.90	6.65	32.52			
AV	5.2385G	100.15	Inf	-Inf	93.12	3	Horizontal	0	1.06	108	32.90	6.65	32.52			
PK	5.3507G	55.30	74.00	-18.70	47.99	3	Horizontal	0	1.06	108	33.10	6.71	32.50			
AV	5.3564G	43.92	54.00	-10.08	36.57	3	Horizontal	0	1.06	108	33.13	6.71	32.49			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

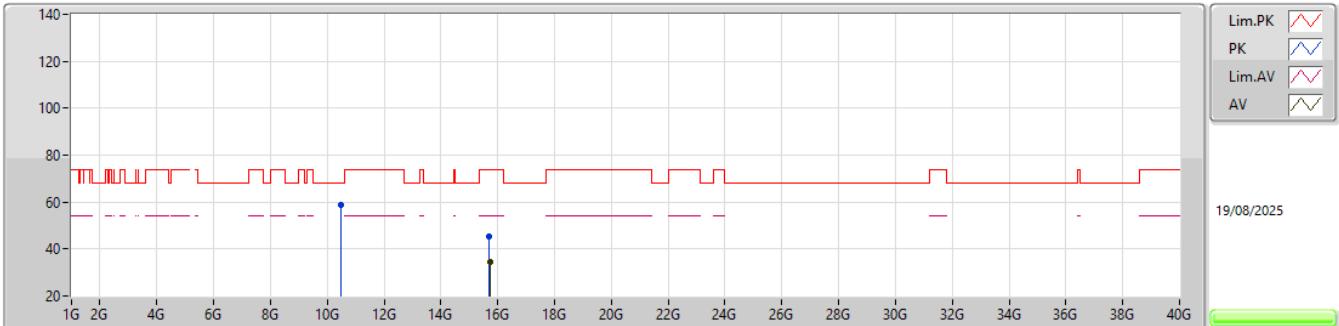


EUT_Y_1TX
Setting 108
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47646G	58.93	68.20	-9.27	75.31	3	Vertical	311	1.88	-	39.25	11.09	66.72			
PK	15.71568G	45.52	74.00	-28.48	57.20	3	Vertical	246	2.02	-	38.99	13.22	63.89			
AV	15.72456G	34.73	54.00	-19.27	46.35	3	Vertical	246	2.02	-	39.05	13.23	63.90			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

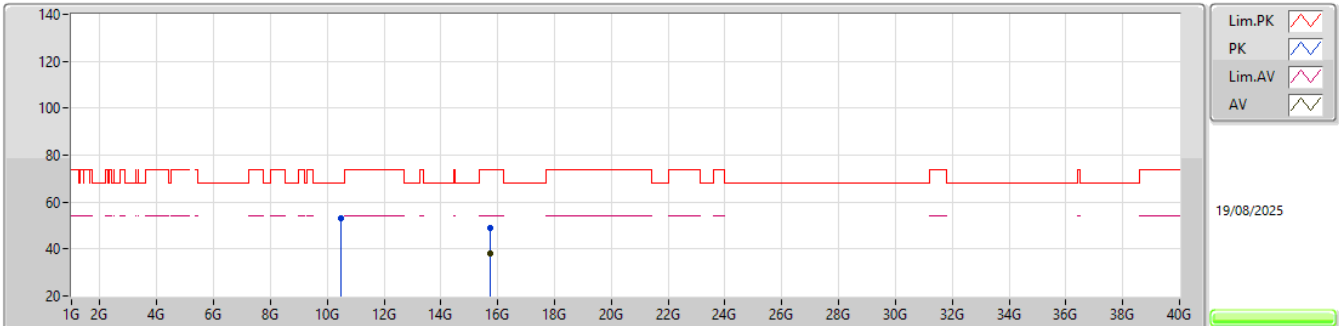


EUT_Y_1TX
Setting 108
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4764G	53.33	68.20	-14.87	69.71	3	Horizontal	57	1.80	-	39.25	11.09	66.72			
PK	15.73239G	48.94	74.00	-25.06	60.52	3	Horizontal	50	1.94	-	39.09	13.23	63.90			
AV	15.71949G	37.88	54.00	-16.12	49.53	3	Horizontal	50	1.94	-	39.02	13.22	63.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5180MHz_TX

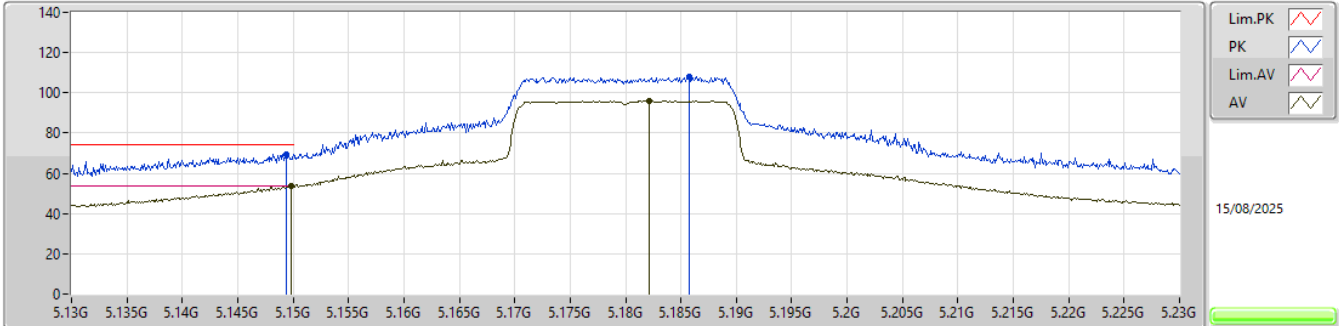


EUT_Y_1TX
SET 82
80\87\84\83\82
1.79\ -3.75\ -0.81\ -0.25\ 0.32

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1494G	69.63	74.00	-4.37	62.73	3	Vertical	2	1.80	82	32.80	6.64	32.54			
AV	5.1498G	53.68	54.00	-0.32	46.78	3	Vertical	2	1.80	82	32.80	6.64	32.54			
PK	5.1857G	108.28	Inf	-Inf	101.32	3	Vertical	2	1.80	82	32.87	6.63	32.54			
AV	5.1821G	96.03	Inf	-Inf	89.08	3	Vertical	2	1.80	82	32.86	6.63	32.54			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5180MHz_TX

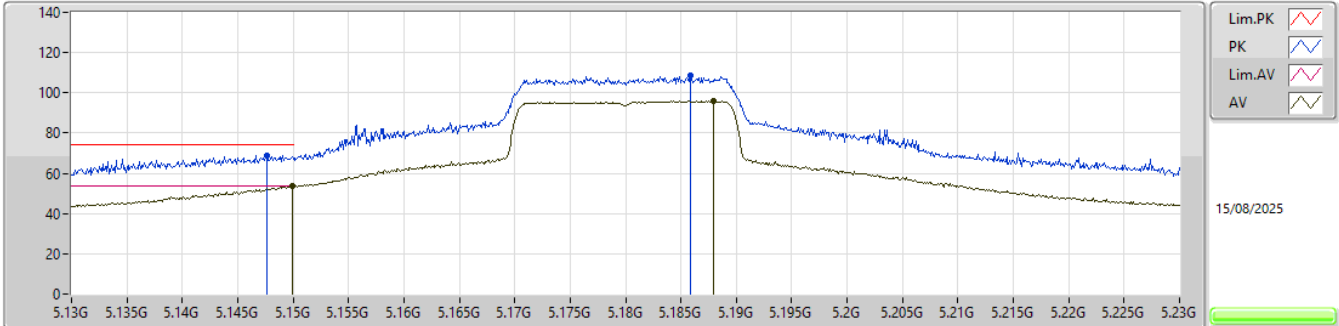


EUT_Y_1TX
SET 82
82
0.44

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1476G	68.69	74.00	-5.31	61.79	3	Horizontal	0	1.05	82	32.80	6.64	32.54			
AV	5.1499G	53.56	54.00	-0.44	46.66	3	Horizontal	0	1.05	82	32.80	6.64	32.54			
PK	5.1859G	108.32	Inf	-Inf	101.36	3	Horizontal	0	1.05	82	32.87	6.63	32.54			
AV	5.1879G	96.01	Inf	-Inf	89.03	3	Horizontal	0	1.05	82	32.88	6.63	32.53			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5180MHz_TX

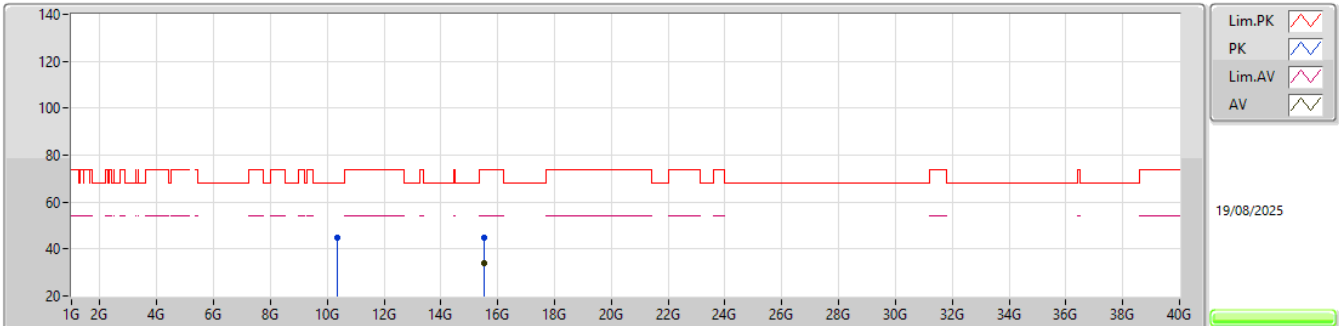


EUT_Y_1TX
Setting 82
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35361G	44.66	68.20	-23.54	61.12	3	Vertical	241	1.11	-	39.20	11.01	66.67			
PK	15.53343G	45.05	74.00	-28.95	56.91	3	Vertical	334	1.90	-	38.87	13.09	63.82			
AV	15.52524G	33.75	54.00	-20.25	45.58	3	Vertical	334	1.90	-	38.90	13.09	63.82			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5180MHz_TX

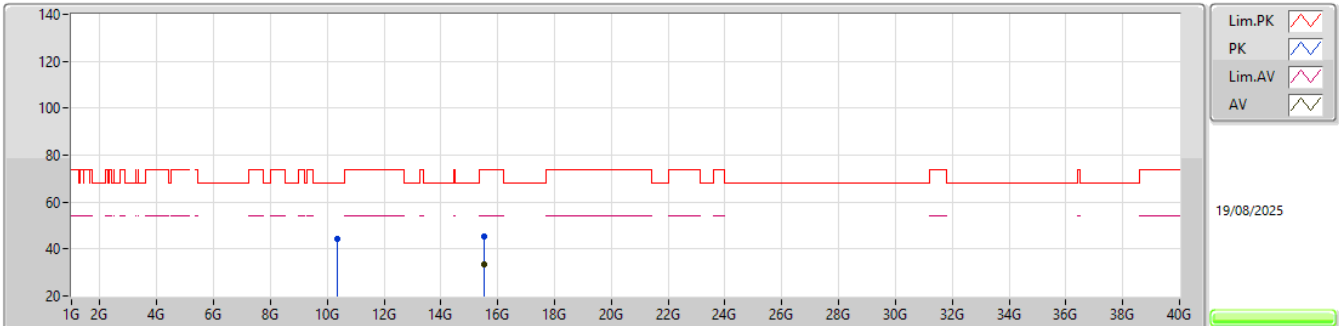


EUT_Y_1TX
Setting 82
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35451G	44.18	68.20	-24.02	60.64	3	Horizontal	49	1.94	-	39.20	11.01	66.67			
PK	15.53151G	45.40	74.00	-28.60	57.26	3	Horizontal	30	2.08	-	38.87	13.09	63.82			
AV	15.52791G	33.63	54.00	-20.37	45.47	3	Horizontal	30	2.08	-	38.89	13.09	63.82			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5200MHz_TX

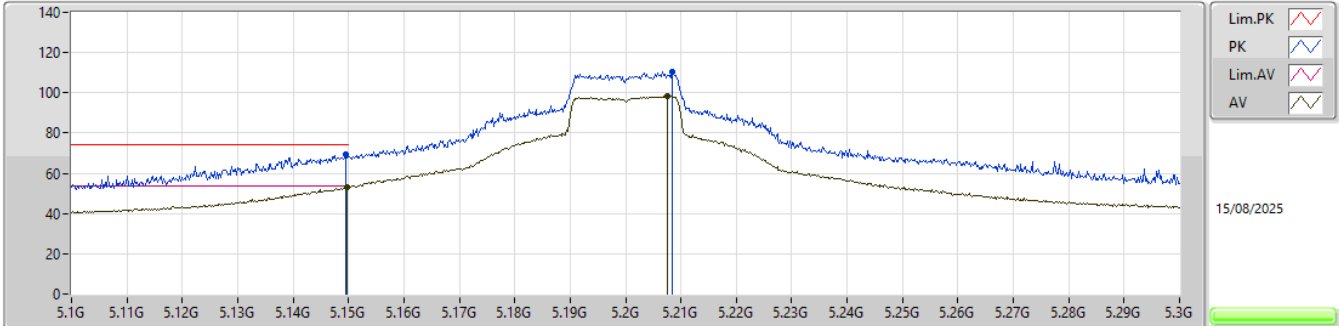


EUT_Y_1TX
SET94
80\108\94\101\98\97\96\95\94
11.49\ -2.28\1.33\ -2.21\ -1.96\ -1.34\ -0.72\ -0.09\0.75

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1496G	69.42	74.00	-4.58	62.52	3	Vertical	4	1.80	94	32.80	6.64	32.54				
AV	5.1498G	53.25	54.00	-0.75	46.35	3	Vertical	4	1.80	94	32.80	6.64	32.54				
PK	5.2084G	110.45	Inf	-Inf	103.45	3	Vertical	4	1.80	94	32.90	6.63	32.53				
AV	5.2076G	98.16	Inf	-Inf	91.16	3	Vertical	4	1.80	94	32.90	6.63	32.53				

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5200MHz_TX

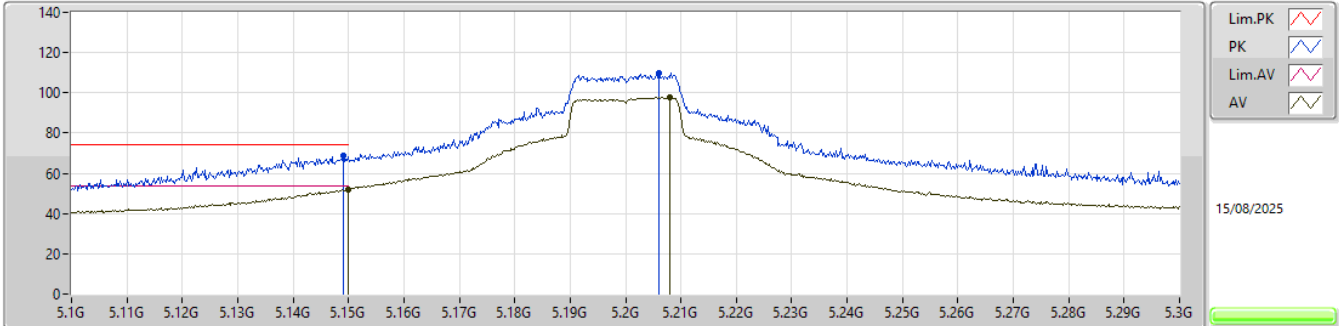


EUT Y_1TX
SET 94
94
1.87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.149G	68.68	74.00	-5.32	61.78	3	Horizontal	360	1.80	94	32.80	6.64	32.54			
AV	5.15G	52.13	54.00	-1.87	45.23	3	Horizontal	360	1.80	94	32.80	6.64	32.54			
PK	5.206G	110.01	Inf	-Inf	103.01	3	Horizontal	360	1.80	94	32.90	6.63	32.53			
AV	5.208G	97.70	Inf	-Inf	90.70	3	Horizontal	360	1.80	94	32.90	6.63	32.53			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5200MHz_TX

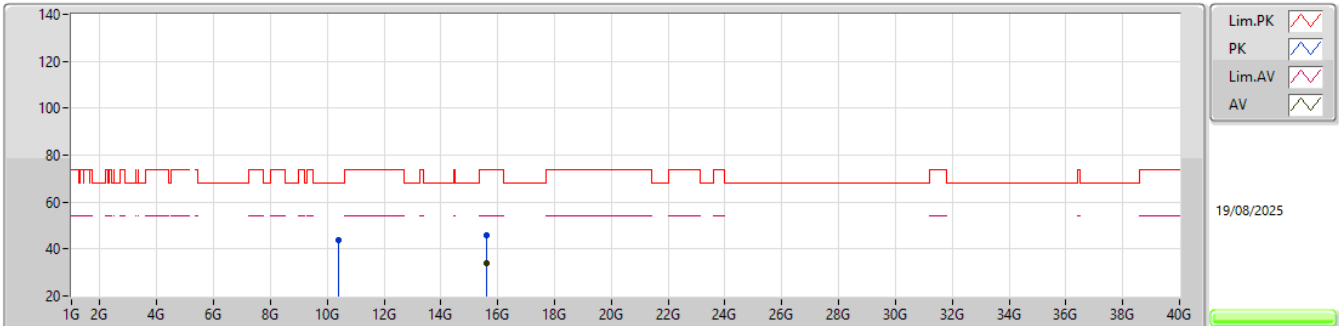


EUT_Y_1TX
Setting 94
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39499G	43.95	68.20	-24.25	60.40	3	Vertical	279	1.07	-	39.20	11.04	66.69			
PK	15.60936G	45.89	74.00	-28.11	57.77	3	Vertical	189	1.38	-	38.82	13.15	63.85			
AV	15.6051G	33.88	54.00	-20.12	45.78	3	Vertical	189	1.38	-	38.81	13.14	63.85			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5200MHz_TX

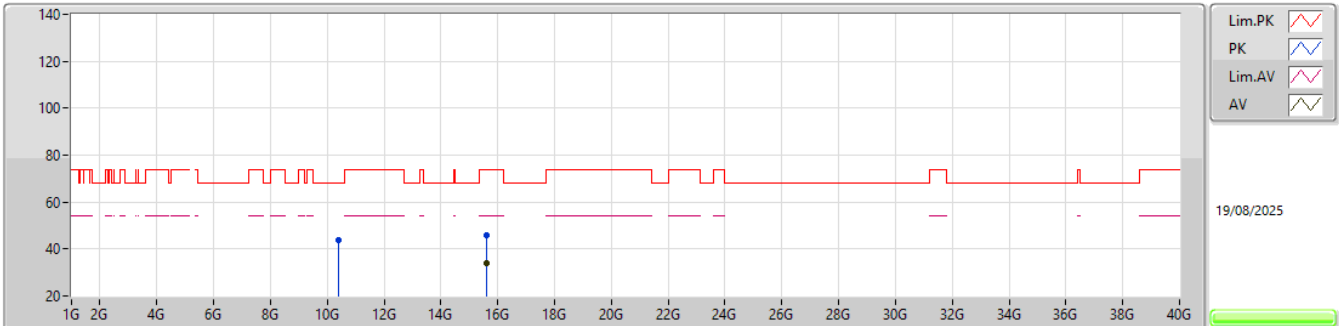


EUT_Y_1TX
Setting 94
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40831G	43.95	68.20	-24.25	60.39	3	Horizontal	23	1.55	-	39.20	11.05	66.69			
PK	15.59763G	45.65	74.00	-28.35	57.56	3	Horizontal	341	2.32	-	38.80	13.14	63.85			
AV	15.60618G	33.94	54.00	-20.06	45.84	3	Horizontal	341	2.32	-	38.81	13.14	63.85			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5240MHz_TX

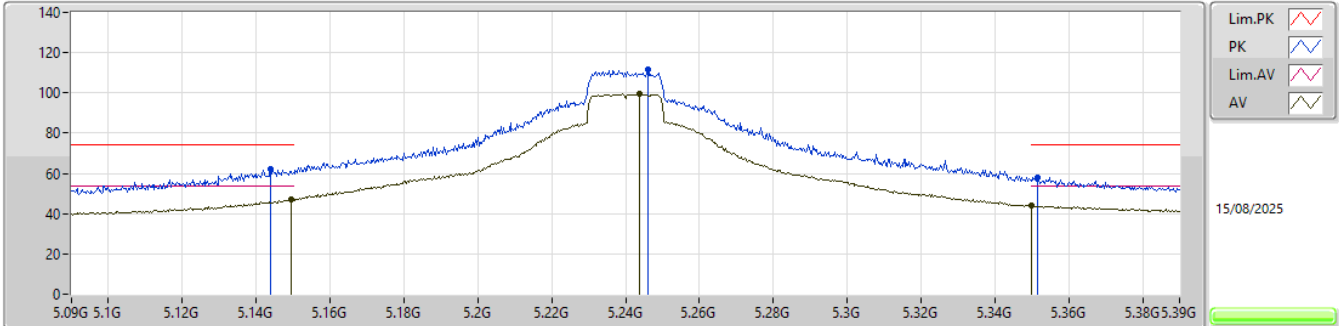


EUT Y_1TX
SET 108
80\108
11.84\6.73

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.144G	61.88	74.00	-12.12	55.00	3	Vertical	2	1.80	108	32.79	6.64	32.55
AV	5.1494G	47.27	54.00	-6.73	40.37	3	Vertical	2	1.80	108	32.80	6.64	32.54
PK	5.246G	111.92	Inf	-Inf	104.89	3	Vertical	2	1.80	108	32.90	6.65	32.52
AV	5.2439G	99.37	Inf	-Inf	92.34	3	Vertical	2	1.80	108	32.90	6.65	32.52
PK	5.3516G	58.01	74.00	-15.99	50.69	3	Vertical	2	1.80	108	33.11	6.71	32.50
AV	5.35G	43.80	54.00	-10.20	36.49	3	Vertical	2	1.80	108	33.10	6.71	32.50

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5240MHz_TX

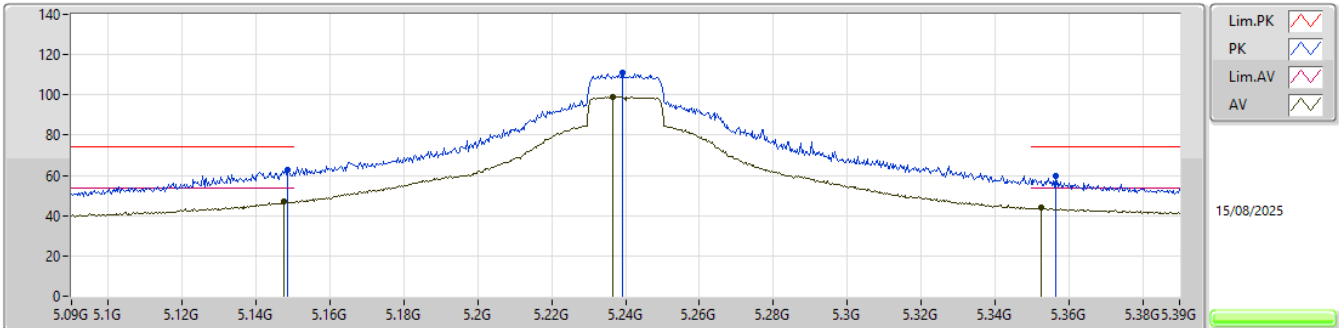


EUT Y_1TX
SET 108
108
7.15

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1485G	63.05	74.00	-10.95	56.15	3	Horizontal	0	1.06	108	32.80	6.64	32.54
AV	5.1476G	46.85	54.00	-7.15	39.95	3	Horizontal	0	1.06	108	32.80	6.64	32.54
PK	5.2391G	110.97	Inf	-Inf	103.94	3	Horizontal	0	1.06	108	32.90	6.65	32.52
AV	5.2364G	99.18	Inf	-Inf	92.15	3	Horizontal	0	1.06	108	32.90	6.65	32.52
PK	5.3564G	59.81	74.00	-14.19	52.46	3	Horizontal	0	1.06	108	33.13	6.71	32.49
AV	5.3525G	43.85	54.00	-10.15	36.53	3	Horizontal	0	1.06	108	33.11	6.71	32.50

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5240MHz_TX

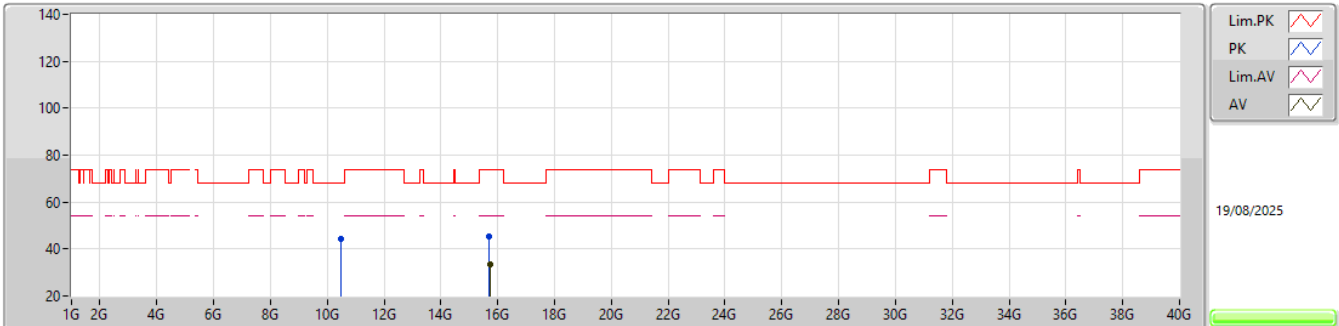


EUT_Y_1TX
Setting 108
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48402G	44.13	68.20	-24.07	60.49	3	Vertical	317	2.89	-	39.27	11.09	66.72			
PK	15.70962G	45.11	74.00	-28.89	56.82	3	Vertical	81	2.23	-	38.96	13.22	63.89			
AV	15.71592G	33.33	54.00	-20.67	45.00	3	Vertical	81	2.23	-	39.00	13.22	63.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5240MHz_TX

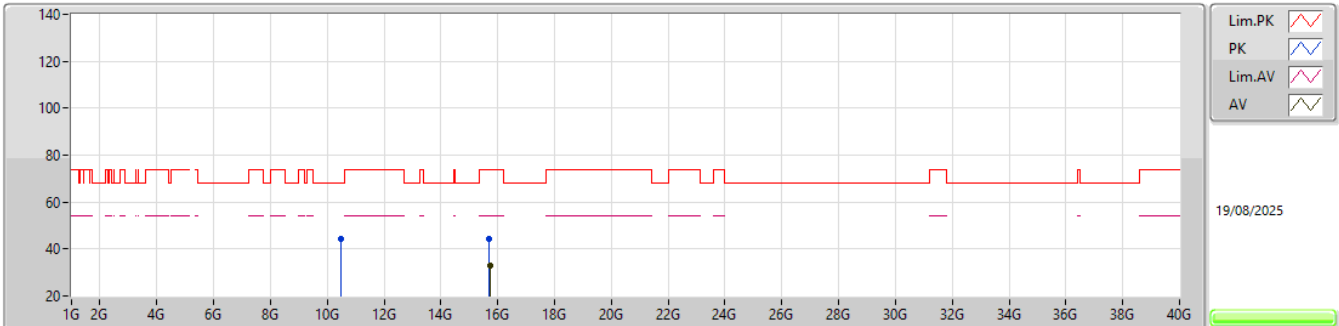


EUT_Y_1TX
Setting 108
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48738G	44.55	68.20	-23.65	60.90	3	Horizontal	311	2.23	-	39.27	11.10	66.72			
PK	15.70734G	44.46	74.00	-29.54	56.19	3	Horizontal	276	1.71	-	38.94	13.22	63.89			
AV	15.7188G	33.07	54.00	-20.93	44.73	3	Horizontal	276	1.71	-	39.01	13.22	63.89			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5190MHz_TX

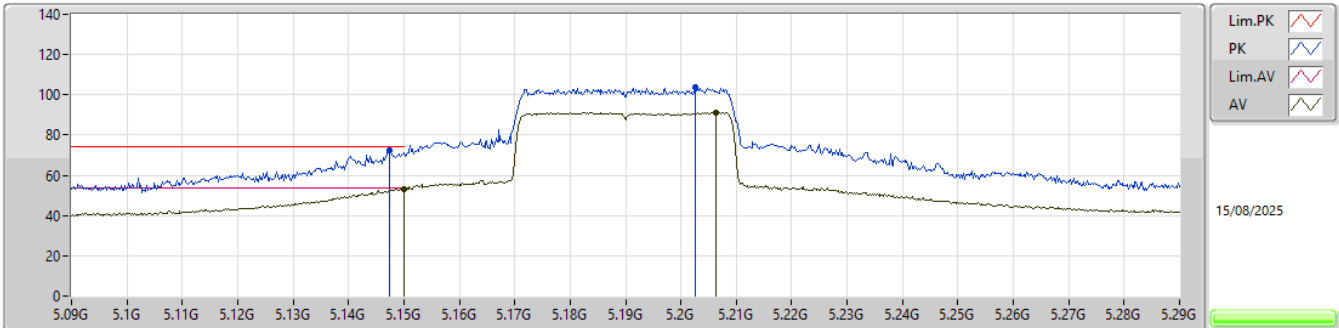


EUT_Y_1TX
SET 77
80\69\84\77\79\78\77
-2.64\7.14\7.84\0.80\2.32\1.14\0.73

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1474G	72.30	74.00	-1.70	65.41	3	Vertical	360	1.80	77	32.79	6.64	32.54			
AV	5.15G	53.27	54.00	-0.73	46.37	3	Vertical	360	1.80	77	32.80	6.64	32.54			
PK	5.2026G	103.73	Inf	-Inf	96.73	3	Vertical	360	1.80	77	32.90	6.63	32.53			
AV	5.2064G	91.31	Inf	-Inf	84.31	3	Vertical	360	1.80	77	32.90	6.63	32.53			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5190MHz_TX

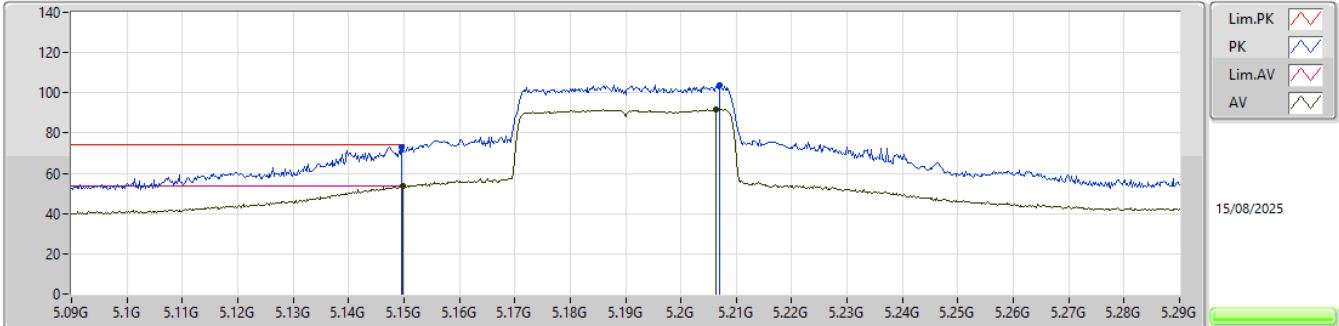


EUT_Y_1TX
SET 77
77
0.27

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1496G	72.84	74.00	-1.16	65.94	3	Horizontal	357	1.09	77	32.80	6.64	32.54			
AV	5.1498G	53.73	54.00	-0.27	46.83	3	Horizontal	357	1.09	77	32.80	6.64	32.54			
PK	5.207G	103.92	Inf	-Inf	96.92	3	Horizontal	357	1.09	77	32.90	6.63	32.53			
AV	5.2064G	91.68	Inf	-Inf	84.68	3	Horizontal	357	1.09	77	32.90	6.63	32.53			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5190MHz_TX

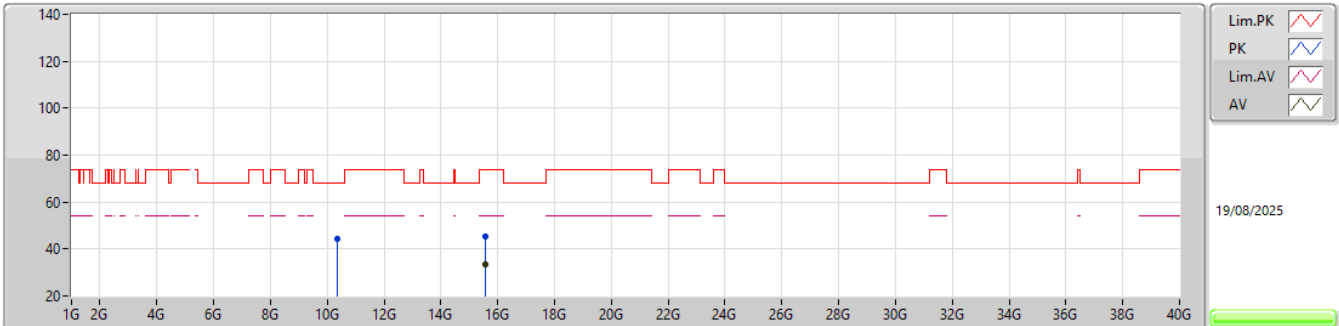


EUT_Y_1TX
Setting 77
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36629G	44.13	68.20	-24.07	60.58	3	Vertical	267	1.85	-	39.20	11.02	66.67			
PK	15.57201G	45.46	74.00	-28.54	57.38	3	Vertical	91	2.68	-	38.80	13.12	63.84			
AV	15.58329G	33.59	54.00	-20.41	45.50	3	Vertical	91	2.68	-	38.80	13.13	63.84			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5190MHz_TX

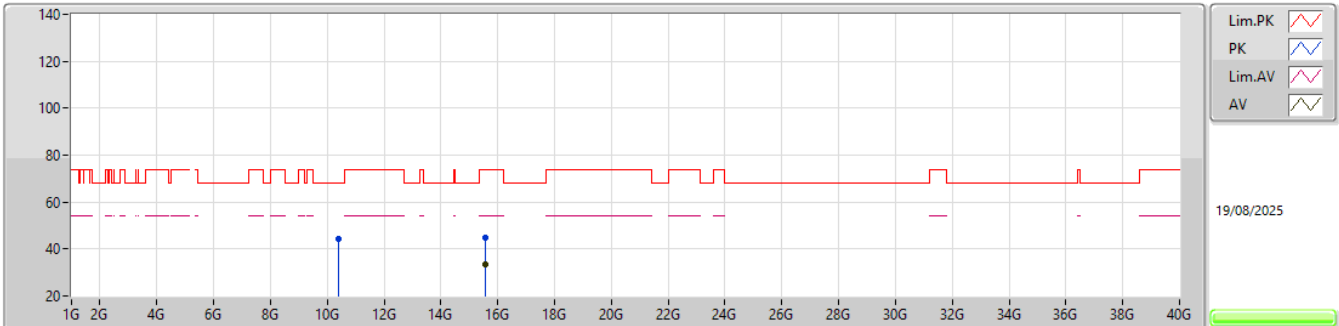


EUT_Y_1TX
Setting 77
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.37676G	44.26	68.20	-23.94	60.72	3	Horizontal	138	1.01	-	39.20	11.02	66.68			
PK	15.56877G	44.94	74.00	-29.06	56.86	3	Horizontal	50	2.52	-	38.80	13.12	63.84			
AV	15.57867G	33.54	54.00	-20.46	45.45	3	Horizontal	50	2.52	-	38.80	13.13	63.84			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5230MHz_TX

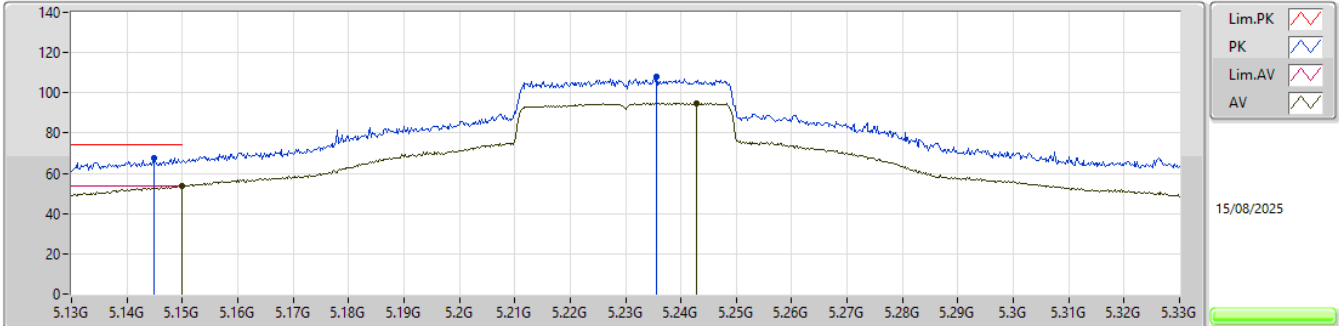


EUT Y_1TX
SET 88
80\106\93\87\90\89\88
6.59\ -3.75\ -2.44\ 0.81\ -1.17\ -0.24\ 0.17

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1448G	67.79	74.00	-6.21	60.91	3	Vertical	2	1.80	88	32.79	6.64	32.55			
AV	5.15G	53.83	54.00	-0.17	46.93	3	Vertical	2	1.80	88	32.80	6.64	32.54			
PK	5.2356G	107.90	Inf	-Inf	100.87	3	Vertical	2	1.80	88	32.90	6.65	32.52			
AV	5.2428G	94.92	Inf	-Inf	87.89	3	Vertical	2	1.80	88	32.90	6.65	32.52			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5230MHz_TX

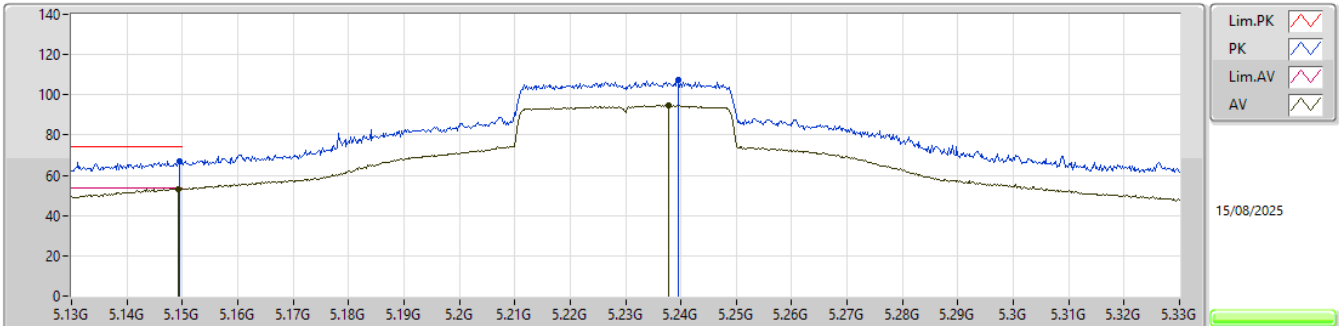


EUT_Y_1TX
SET 87
88\87
-0.17\0.68

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1494G	66.79	74.00	-7.21	59.89	3	Horizontal	0	1.06	87	32.80	6.64	32.54			
AV	5.1492G	53.32	54.00	-0.68	46.42	3	Horizontal	0	1.06	87	32.80	6.64	32.54			
PK	5.2396G	107.54	Inf	-Inf	100.51	3	Horizontal	0	1.06	87	32.90	6.65	32.52			
AV	5.2378G	94.69	Inf	-Inf	87.66	3	Horizontal	0	1.06	87	32.90	6.65	32.52			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5230MHz_TX

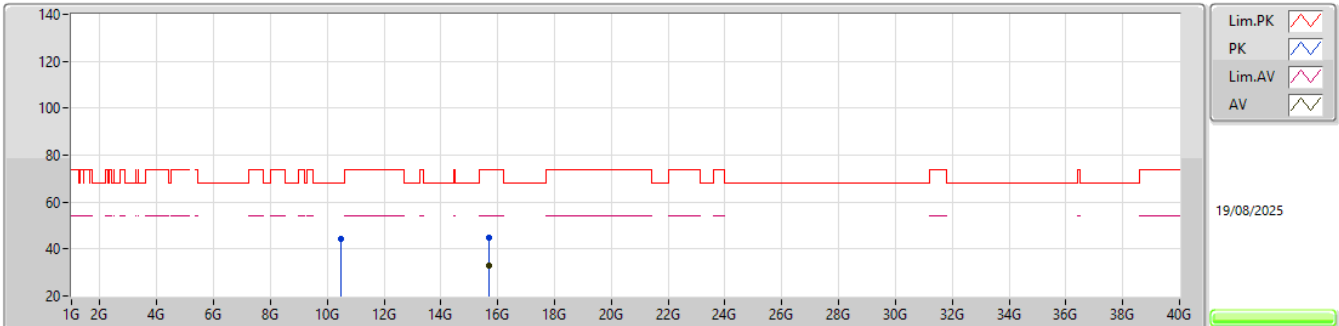


EUT_Y_1TX
Setting 87
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4696G	44.52	68.20	-23.68	60.91	3	Vertical	10	1.04	-	39.24	11.09	66.72			
PK	15.70497G	44.81	74.00	-29.19	56.56	3	Vertical	102	1.00	-	38.93	13.21	63.89			
AV	15.67962G	32.75	54.00	-21.25	44.53	3	Vertical	102	1.00	-	38.90	13.20	63.88			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5230MHz_TX

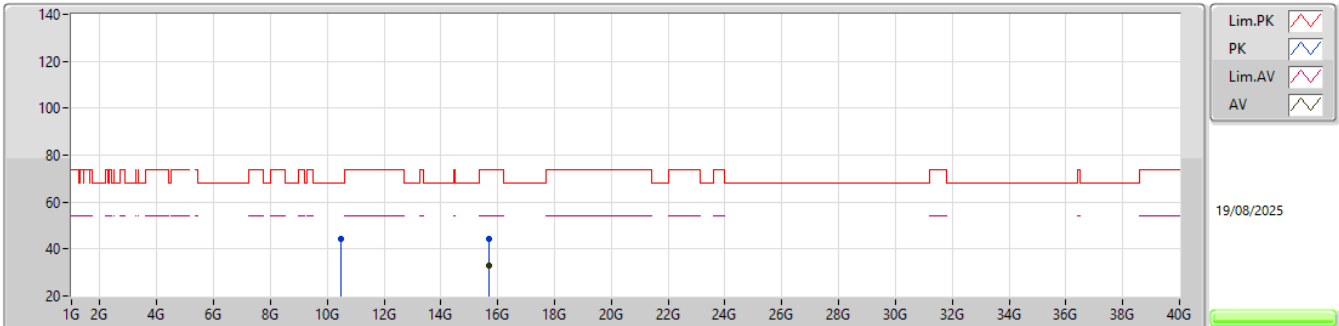


EUT_Y_1TX
Setting 87
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.46453G	44.13	68.20	-24.07	60.54	3	Horizontal	285	1.69	-	39.23	11.08	66.72			
PK	15.68022G	44.44	74.00	-29.56	56.22	3	Horizontal	30	2.90	-	38.90	13.20	63.88			
AV	15.70407G	32.76	54.00	-21.24	44.52	3	Horizontal	30	2.90	-	38.92	13.21	63.89			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

5210MHz_TX

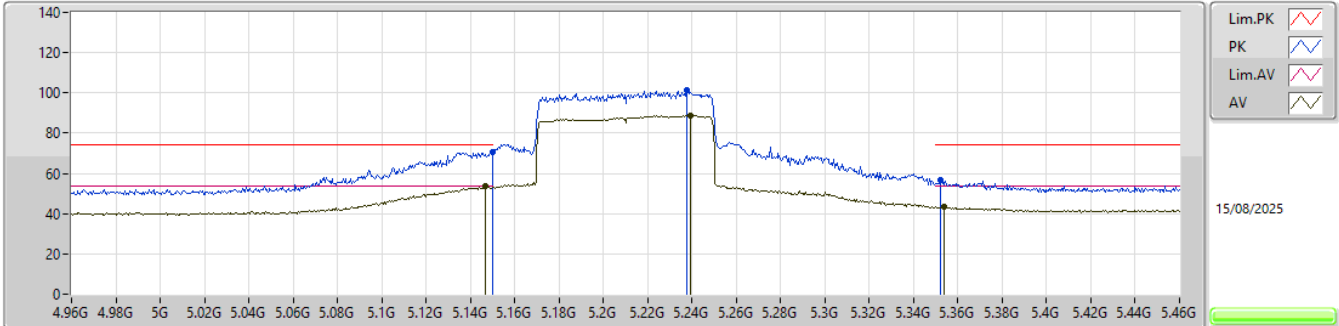


EUT_Y_1TX
SET 75
80\54\84\69\76\73\74\75
-6.30\12.30\10.97\6.39\0.16\2.31\0.96\0.24

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	70.38	74.00	-3.62	63.48	3	Vertical	3	1.80	75	32.80	6.64	32.54
AV	5.147G	53.76	54.00	-0.24	46.87	3	Vertical	3	1.80	75	32.79	6.64	32.54
PK	5.2375G	101.51	Inf	-Inf	94.48	3	Vertical	3	1.80	75	32.90	6.65	32.52
AV	5.2395G	88.90	Inf	-Inf	81.87	3	Vertical	3	1.80	75	32.90	6.65	32.52
PK	5.352G	56.46	74.00	-17.54	49.14	3	Vertical	3	1.80	75	33.11	6.71	32.50
AV	5.354G	43.22	54.00	-10.78	35.89	3	Vertical	3	1.80	75	33.12	6.71	32.50

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

5210MHz_TX

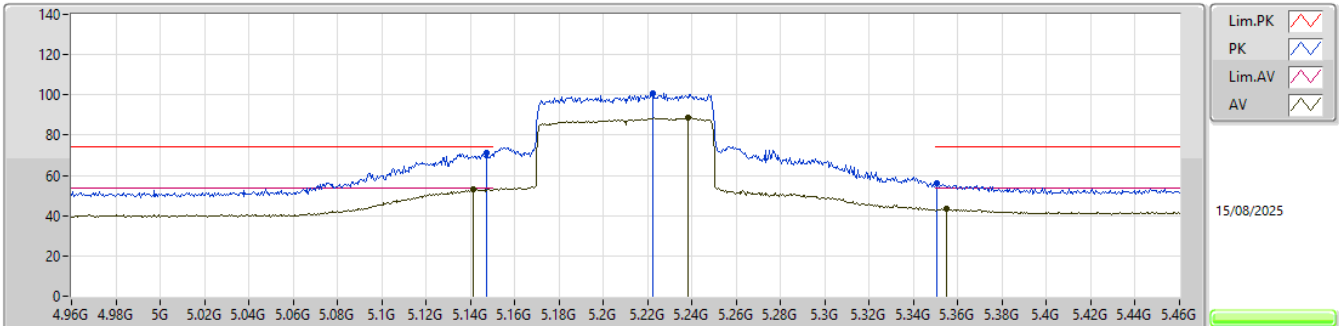


EUT Y_1TX
SET 75
75
0.69

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1475G	71.26	74.00	-2.74	64.37	3	Horizontal	360	1.07	75	32.79	6.64	32.54			
AV	5.141G	53.31	54.00	-0.69	46.44	3	Horizontal	360	1.07	75	32.78	6.64	32.55			
PK	5.2225G	101.03	Inf	-Inf	94.02	3	Horizontal	360	1.07	75	32.90	6.64	32.53			
AV	5.238G	88.62	Inf	-Inf	81.59	3	Horizontal	360	1.07	75	32.90	6.65	32.52			
PK	5.3505G	56.29	74.00	-17.71	48.98	3	Horizontal	360	1.07	75	33.10	6.71	32.50			
AV	5.355G	43.56	54.00	-10.44	36.22	3	Horizontal	360	1.07	75	33.12	6.71	32.49			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

5210MHz_TX

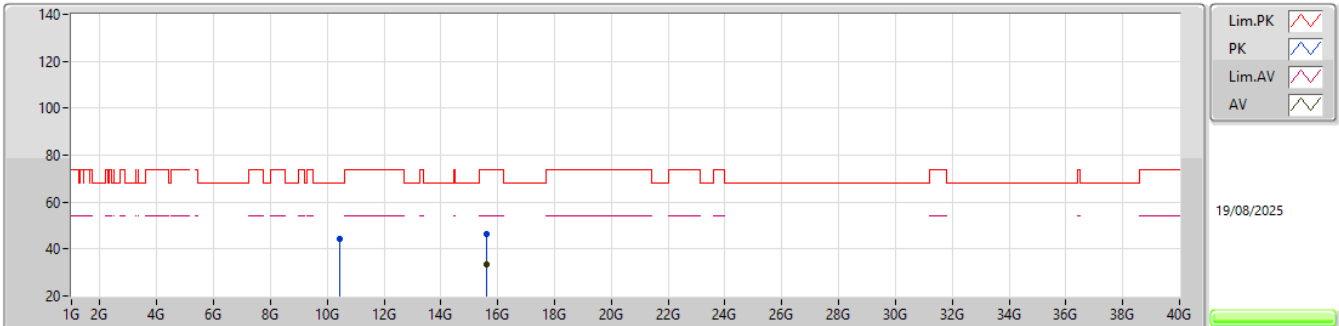


EUT_Y_1TX
Setting 75
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42687G	44.07	68.20	-24.13	60.51	3	Vertical	14	2.25	-	39.20	11.06	66.70			
PK	15.6213G	46.14	74.00	-27.86	58.01	3	Vertical	0	2.57	-	38.84	13.15	63.86			
AV	15.61905G	33.42	54.00	-20.58	45.29	3	Vertical	0	2.57	-	38.84	13.15	63.86			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_1TX

5210MHz_TX

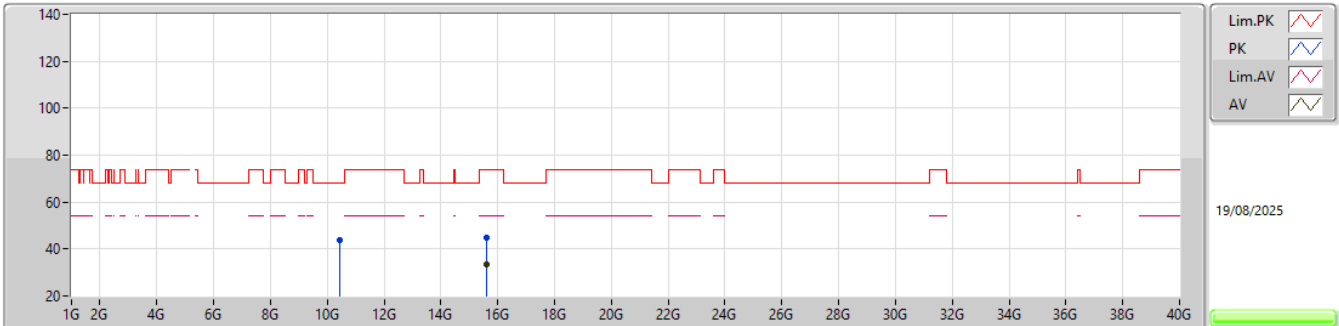


EUT_Y_1TX
Setting 75
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42651G	43.67	68.20	-24.53	60.11	3	Horizontal	101	1.50	-	39.20	11.06	66.70			
PK	15.62922G	45.01	74.00	-28.99	56.85	3	Horizontal	264	1.20	-	38.86	13.16	63.86			
AV	15.62598G	33.53	54.00	-20.47	45.38	3	Horizontal	264	1.20	-	38.85	13.16	63.86			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

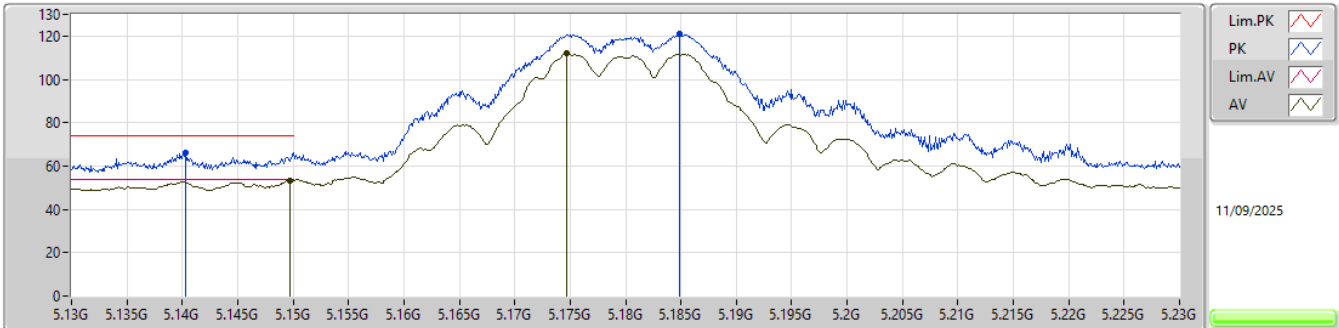


EUT_Y_2TX
Setting 76
03-C-B-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1403G	66.06	74.00	-7.94	59.62	3	Vertical	187	1.79	-	33.90	7.47	34.93			
AV	5.1497G	53.41	54.00	-0.59	46.95	3	Vertical	187	1.79	-	33.90	7.49	34.93			
PK	5.1849G	121.10	Inf	-Inf	114.41	3	Vertical	187	1.79	-	34.04	7.57	34.92			
AV	5.1747G	111.99	Inf	-Inf	105.37	3	Vertical	187	1.79	-	34.00	7.55	34.93			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

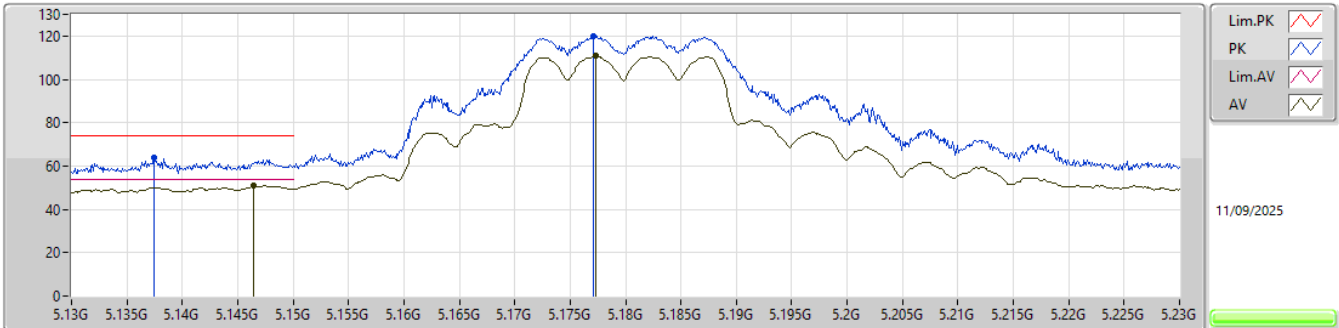


EUT_Y_2TX
Setting 76
03-C-B-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1374G	63.60	74.00	-10.40	57.17	3	Horizontal	186	1.25	-	33.90	7.46	34.93			
AV	5.1464G	50.85	54.00	-3.15	44.40	3	Horizontal	186	1.25	-	33.90	7.48	34.93			
PK	5.1771G	119.95	Inf	-Inf	113.30	3	Horizontal	186	1.25	-	34.01	7.56	34.92			
AV	5.1773G	111.16	Inf	-Inf	104.51	3	Horizontal	186	1.25	-	34.01	7.56	34.92			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

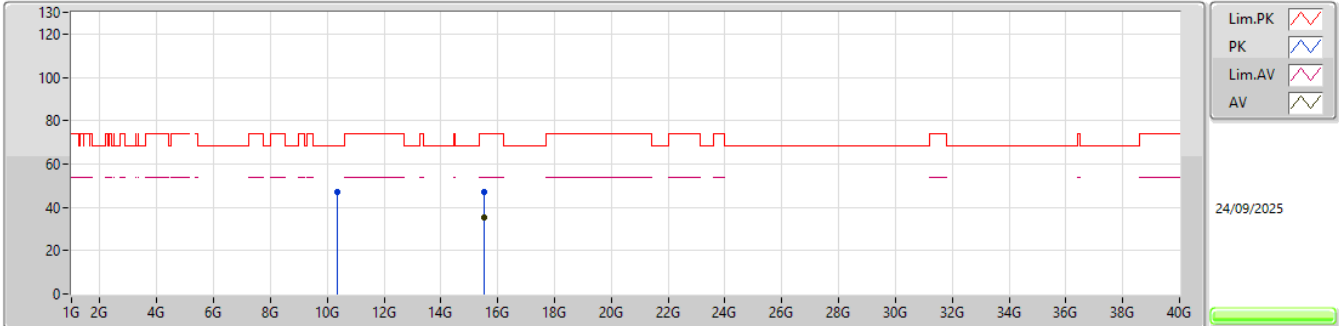


EUT_Y_2TX(0,1)
Setting 76
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36588G	47.17	68.20	-21.03	63.62	3	Vertical	23	1.99	-	39.20	11.02	66.67			
PK	15.52893G	47.20	74.00	-26.80	59.05	3	Vertical	231	1.67	-	38.88	13.09	63.82			
AV	15.52998G	35.38	54.00	-18.62	47.23	3	Vertical	231	1.67	-	38.88	13.09	63.82			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

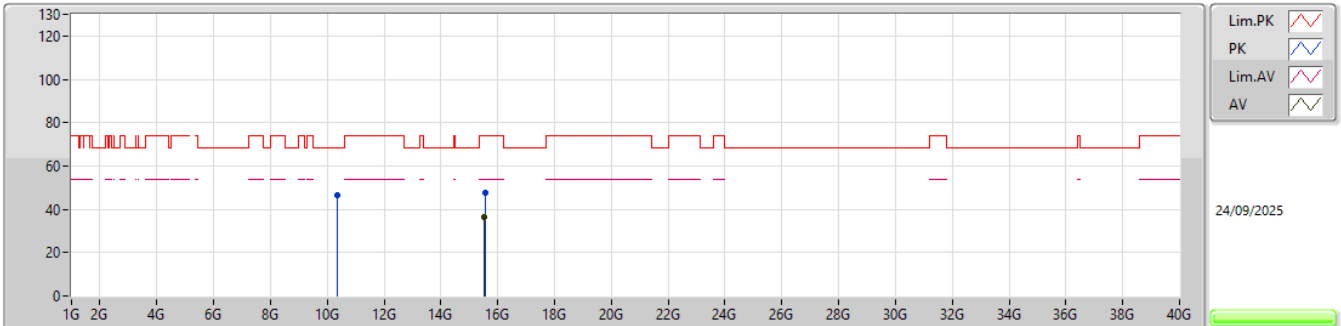


EUT_Y_2TX(0,1)
Setting 76
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.37068G	46.54	68.20	-21.66	63.00	3	Horizontal	65	2.27	-	39.20	11.02	66.68			
PK	15.54576G	47.48	74.00	-26.52	59.39	3	Horizontal	356	1.61	-	38.82	13.10	63.83			
AV	15.52641G	36.22	54.00	-17.78	48.06	3	Horizontal	356	1.61	-	38.89	13.09	63.82			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

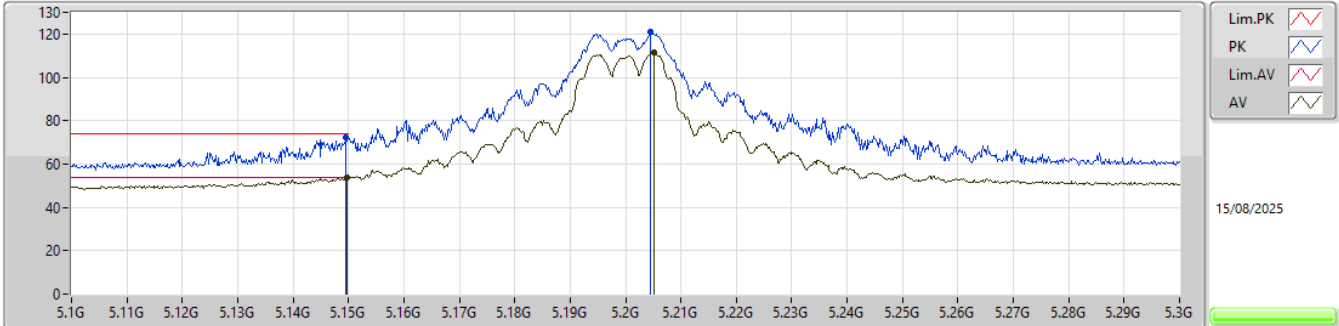


EUT_Y_2TX (0,1)
Setting 84
01-U-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1496G	72.06	74.00	-1.94	65.16	3	Vertical	1	1.80	-	32.80	6.64	32.54			
AV	5.1498G	53.90	54.00	-0.10	47.00	3	Vertical	1	1.80	-	32.80	6.64	32.54			
PK	5.2046G	120.98	Inf	-Inf	113.98	3	Vertical	1	1.80	-	32.90	6.63	32.53			
AV	5.2052G	111.44	Inf	-Inf	104.44	3	Vertical	1	1.80	-	32.90	6.63	32.53			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

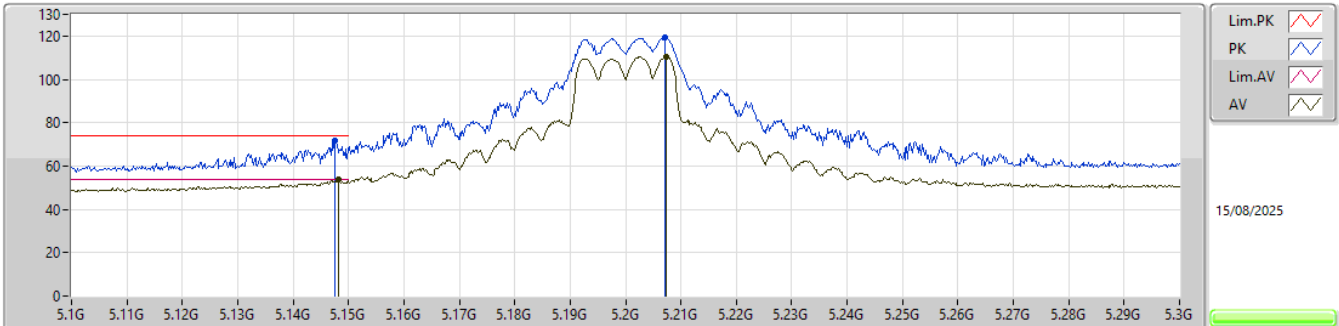


EUT_Y_2TX (0,1)
Setting 84
01-U-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1476G	71.63	74.00	-2.37	64.73	3	Horizontal	2	1.80	-	32.80	6.64	32.54			
AV	5.1482G	53.59	54.00	-0.41	46.69	3	Horizontal	2	1.80	-	32.80	6.64	32.54			
PK	5.2072G	119.49	Inf	-Inf	112.49	3	Horizontal	2	1.80	-	32.90	6.63	32.53			
AV	5.2074G	110.52	Inf	-Inf	103.52	3	Horizontal	2	1.80	-	32.90	6.63	32.53			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

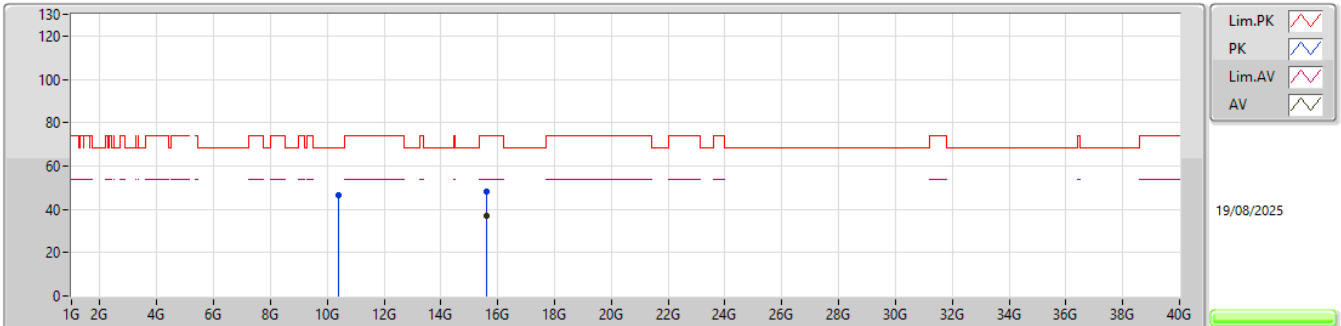


EUT_Y_2TX(0,1)
Setting 84
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40801G	46.65	68.20	-21.55	63.09	3	Vertical	355	2.11	-	39.20	11.05	66.69			
PK	15.60438G	48.14	74.00	-25.86	60.04	3	Vertical	208	1.61	-	38.81	13.14	63.85			
AV	15.60801G	36.72	54.00	-17.28	48.60	3	Vertical	208	1.61	-	38.82	13.15	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

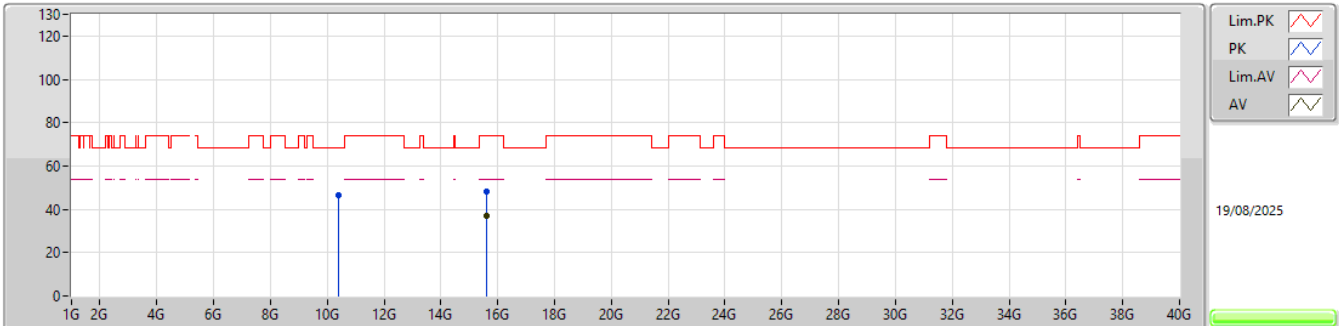


EUT_Y_2TX(0,1)
Setting 84
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.40504G	46.32	68.20	-21.88	62.77	3	Horizontal	360	1.09	-	39.20	11.04	66.69			
PK	15.59541G	48.34	74.00	-25.66	60.25	3	Horizontal	343	1.27	-	38.80	13.14	63.85			
AV	15.60276G	36.81	54.00	-17.19	48.71	3	Horizontal	343	1.27	-	38.81	13.14	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

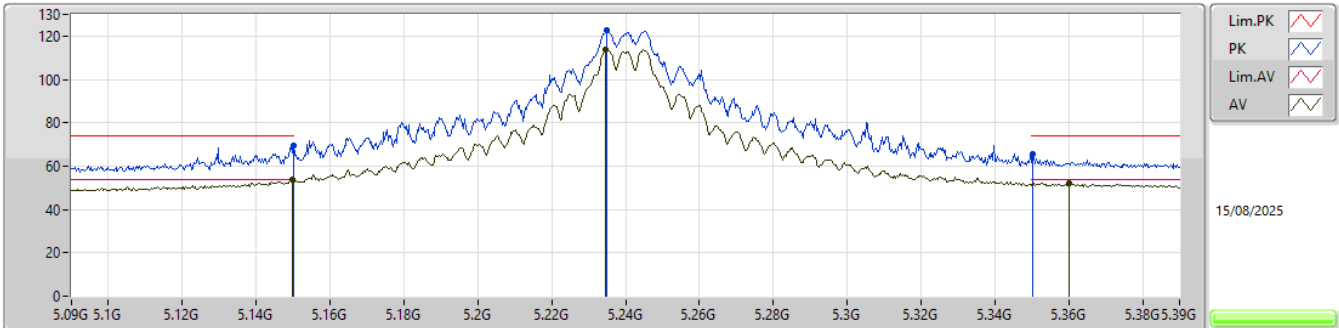


EUT Y 2TX (0,1)
Setting 92
01-U-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	69.70	74.00	-4.30	62.80	3	Vertical	2	1.80	-	32.80	6.64	32.54
AV	5.1497G	53.71	54.00	-0.29	46.81	3	Vertical	2	1.80	-	32.80	6.64	32.54
PK	5.2349G	122.46	Inf	-Inf	115.43	3	Vertical	2	1.80	-	32.90	6.65	32.52
AV	5.2346G	113.72	Inf	-Inf	106.69	3	Vertical	2	1.80	-	32.90	6.65	32.52
PK	5.3504G	65.73	74.00	-8.27	58.42	3	Vertical	2	1.80	-	33.10	6.71	32.50
AV	5.36G	52.36	54.00	-1.64	45.00	3	Vertical	2	1.80	-	33.14	6.71	32.49

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

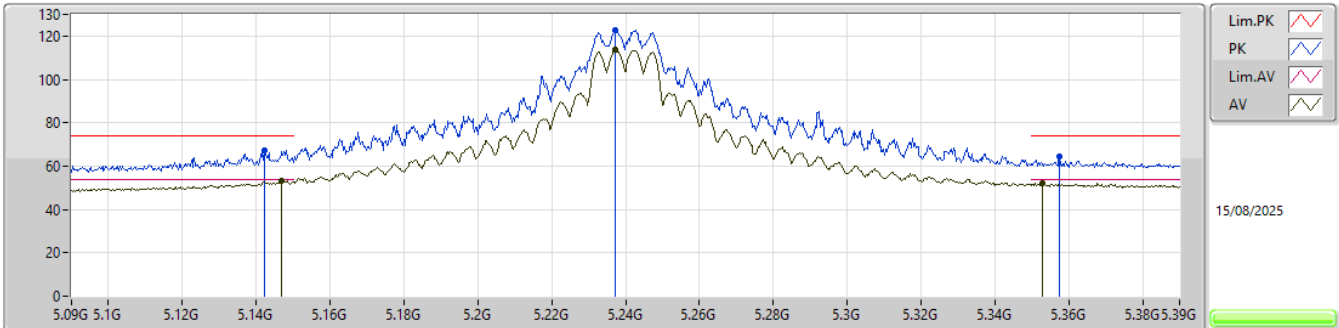


EUT Y 2TX (0,1)
Setting 92
01-U-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1422G	67.23	74.00	-6.77	60.36	3	Horizontal	2	1.06	-	32.78	6.64	32.55			
AV	5.1467G	53.32	54.00	-0.68	46.43	3	Horizontal	2	1.06	-	32.79	6.64	32.54			
PK	5.2373G	122.87	Inf	-Inf	115.84	3	Horizontal	2	1.06	-	32.90	6.65	32.52			
AV	5.2373G	113.48	Inf	-Inf	106.45	3	Horizontal	2	1.06	-	32.90	6.65	32.52			
PK	5.3576G	64.56	74.00	-9.44	57.21	3	Horizontal	2	1.06	-	33.13	6.71	32.49			
AV	5.3528G	52.14	54.00	-1.86	44.82	3	Horizontal	2	1.06	-	33.11	6.71	32.50			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

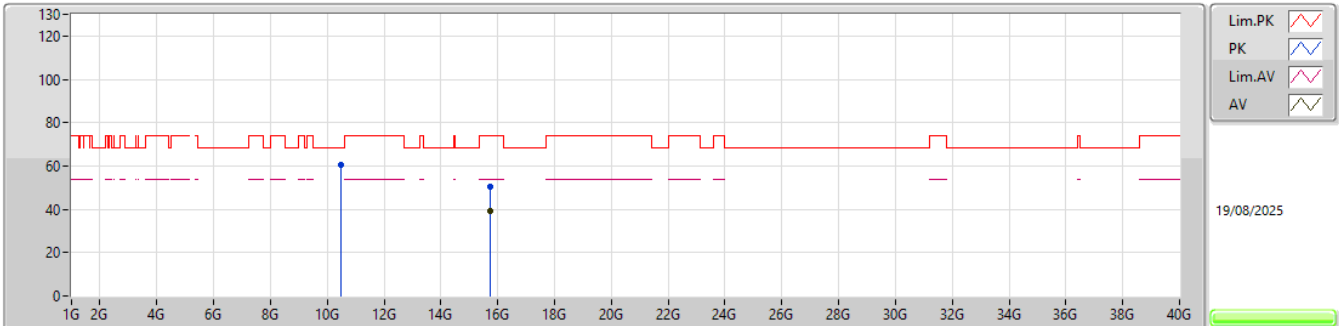


EUT_Y_2TX(0,1)
Setting 92
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.477G	60.47	68.20	-7.73	76.85	3	Vertical	32	1.80	-	39.25	11.09	66.72			
PK	15.72903G	50.40	74.00	-23.60	62.00	3	Vertical	9	1.76	-	39.07	13.23	63.90			
AV	15.72471G	39.03	54.00	-14.97	50.65	3	Vertical	9	1.76	-	39.05	13.23	63.90			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

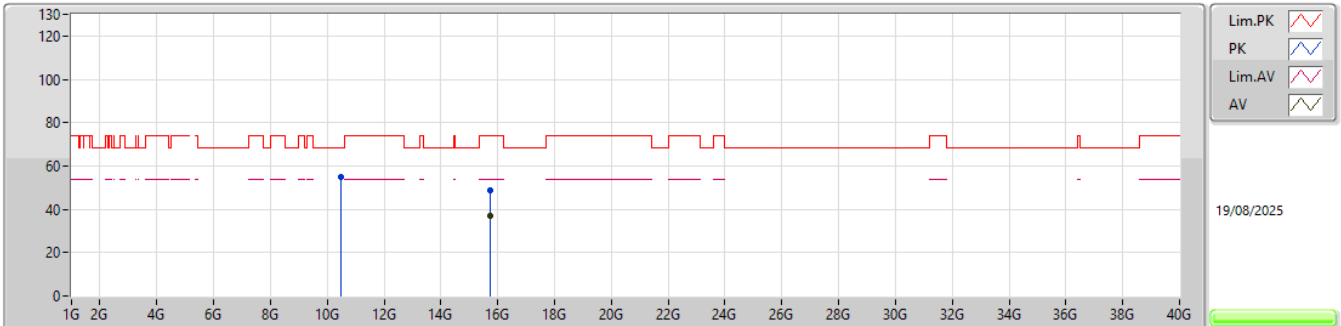


EUT_Y_2TX(0,1)
Setting 92
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48036G	54.82	68.20	-13.38	71.19	3	Horizontal	56	1.80	-	39.26	11.09	66.72			
PK	15.71865G	48.73	74.00	-25.27	60.39	3	Horizontal	53	1.80	-	39.01	13.22	63.89			
AV	15.71586G	37.16	54.00	-16.84	48.83	3	Horizontal	53	1.80	-	39.00	13.22	63.89			

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5180MHz_TX

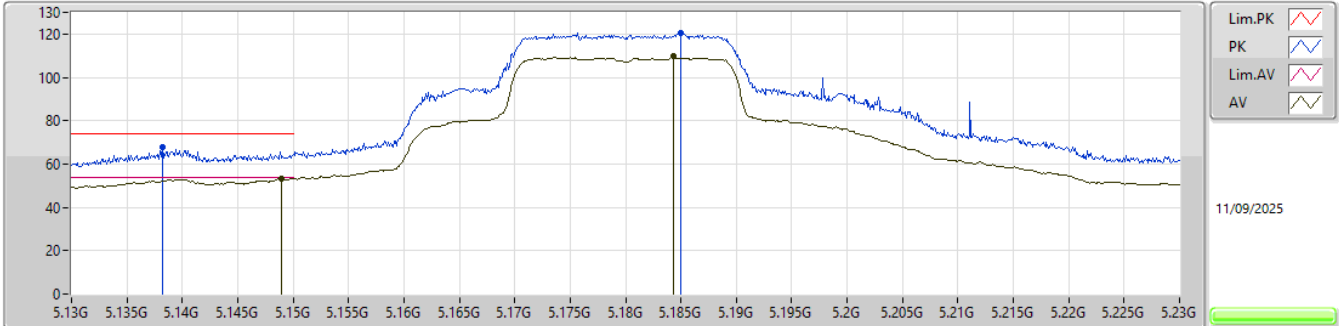


EUT_Y_2TX
Setting 75
03-C-B-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1382G	67.90	74.00	-6.10	61.47	3	Vertical	182	1.78	-	33.90	7.46	34.93			
AV	5.1489G	53.50	54.00	-0.50	47.04	3	Vertical	182	1.78	-	33.90	7.49	34.93			
PK	5.185G	120.28	Inf	-Inf	113.59	3	Vertical	182	1.78	-	34.04	7.57	34.92			
AV	5.1843G	109.75	Inf	-Inf	103.06	3	Vertical	182	1.78	-	34.04	7.57	34.92			

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5180MHz_TX

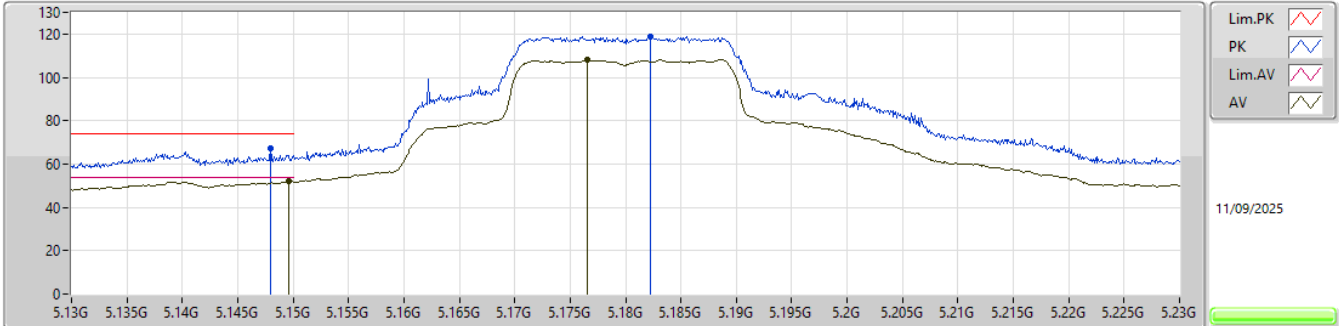


EUT_Y_2TX
Setting 75
03-C-B-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	67.39	74.00	-6.61	60.93	3	Horizontal	186	1.34	-	33.90	7.49	34.93			
AV	5.1496G	52.24	54.00	-1.76	45.78	3	Horizontal	186	1.34	-	33.90	7.49	34.93			
PK	5.1823G	118.89	Inf	-Inf	112.21	3	Horizontal	186	1.34	-	34.03	7.57	34.92			
AV	5.1766G	108.20	Inf	-Inf	101.55	3	Horizontal	186	1.34	-	34.01	7.56	34.92			

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5180MHz_TX

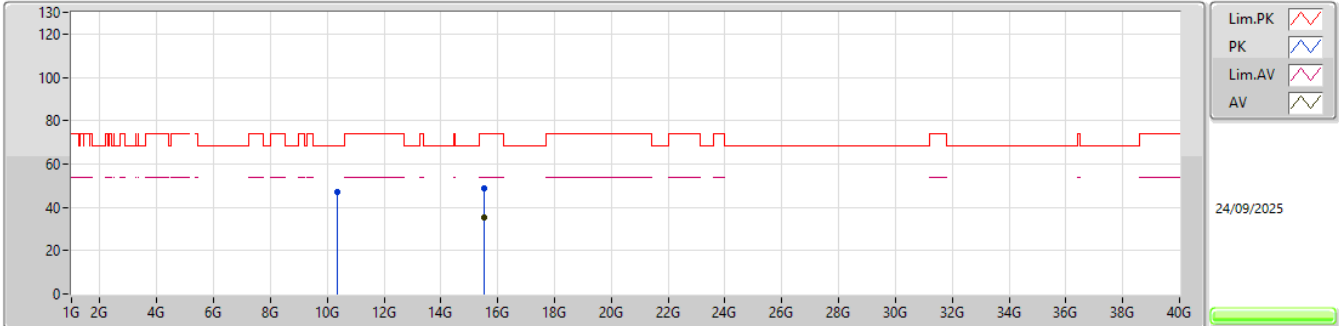


EUT_Y_2TX(0,1)
Setting 75
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35481G	46.86	68.20	-21.34	63.32	3	Vertical	78	2.17	-	39.20	11.01	66.67			
PK	15.53361G	48.55	74.00	-25.45	60.41	3	Vertical	127	1.57	-	38.87	13.09	63.82			
AV	15.53142G	35.40	54.00	-18.60	47.26	3	Vertical	127	1.57	-	38.87	13.09	63.82			

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5180MHz_TX

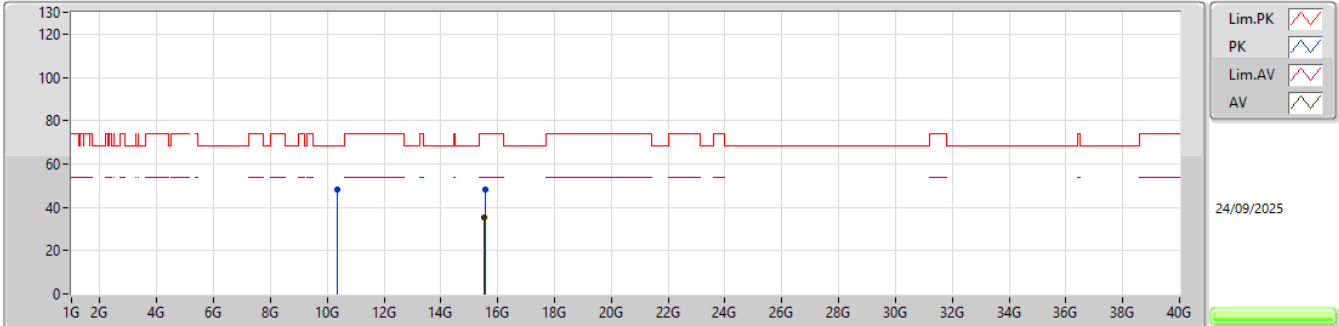


EUT_Y_2TX(0,1)
Setting 75
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.36594G	48.43	68.20	-19.77	64.88	3	Horizontal	121	1.65	-	39.20	11.02	66.67			
PK	15.55314G	48.06	74.00	-25.94	59.98	3	Horizontal	31	1.02	-	38.80	13.11	63.83			
AV	15.52557G	35.36	54.00	-18.64	47.19	3	Horizontal	31	1.02	-	38.90	13.09	63.82			

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5200MHz_TX

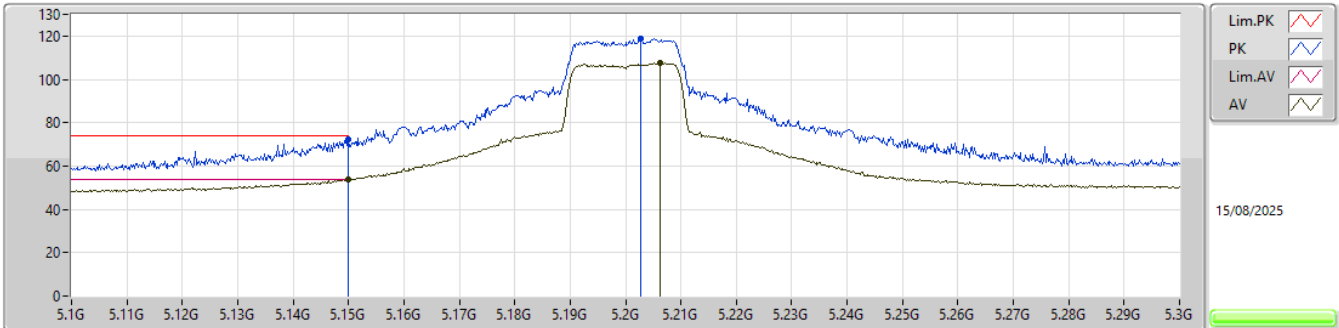


EUT_Y_2TX(0,1)
Setting 80
01-U-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	72.05	74.00	-1.95	65.15	3	Vertical	2	1.80	-	32.80	6.64	32.54
AV	5.15G	53.64	54.00	-0.36	46.74	3	Vertical	2	1.80	-	32.80	6.64	32.54
PK	5.2028G	118.91	Inf	-Inf	111.91	3	Vertical	2	1.80	-	32.90	6.63	32.53
AV	5.2062G	107.77	Inf	-Inf	100.77	3	Vertical	2	1.80	-	32.90	6.63	32.53

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5200MHz_TX

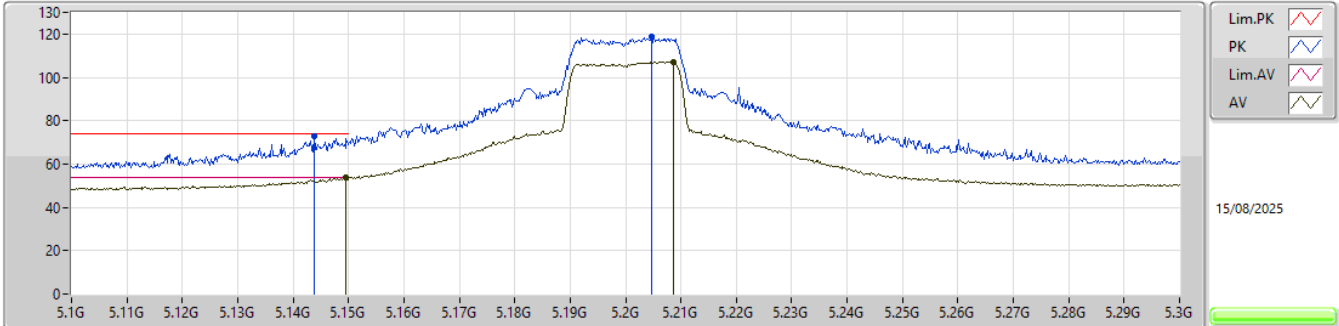


EUT_Y_2TX(0,1)
Setting 80
01-U-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1438G	72.61	74.00	-1.39	65.73	3	Horizontal	0	1.78	-	32.79	6.64	32.55			
AV	5.1494G	53.63	54.00	-0.37	46.73	3	Horizontal	0	1.78	-	32.80	6.64	32.54			
PK	5.2048G	118.63	Inf	-Inf	111.63	3	Horizontal	0	1.78	-	32.90	6.63	32.53			
AV	5.2086G	107.25	Inf	-Inf	100.25	3	Horizontal	0	1.78	-	32.90	6.63	32.53			

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5200MHz_TX

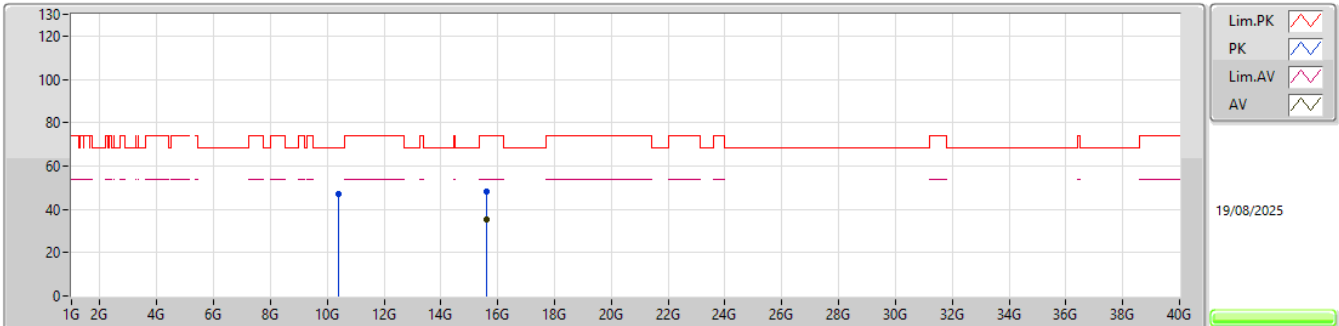


EUT_Y_2TX(0,1)
Setting 80
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41071G	47.14	68.20	-21.06	63.58	3	Vertical	20	1.82	-	39.20	11.05	66.69			
PK	15.59616G	48.00	74.00	-26.00	59.91	3	Vertical	131	1.87	-	38.80	13.14	63.85			
AV	15.60207G	35.57	54.00	-18.43	47.48	3	Vertical	131	1.87	-	38.80	13.14	63.85			

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5200MHz_TX

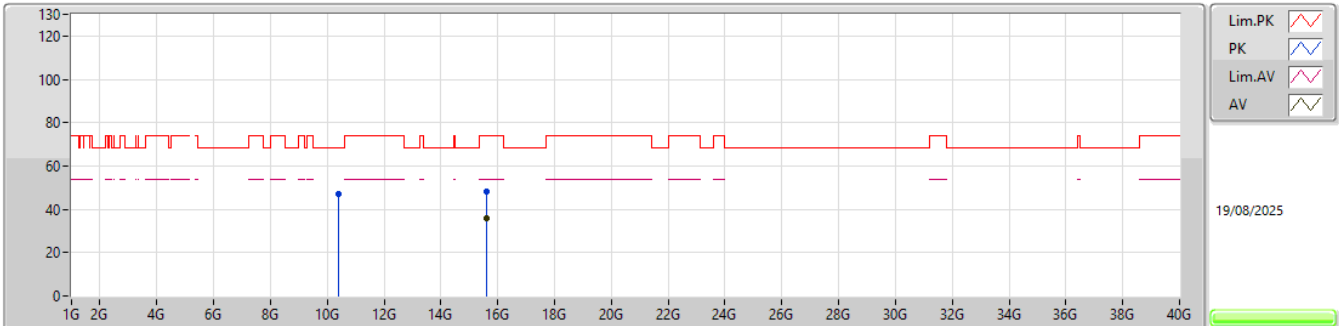


EUT_Y_2TX(0,1)
Setting 80
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.40576G	46.92	68.20	-21.28	63.37	3	Horizontal	97	2.88	-	39.20	11.04	66.69			
PK	15.61092G	48.34	74.00	-25.66	60.22	3	Horizontal	76	2.20	-	38.82	13.15	63.85			
AV	15.60501G	35.65	54.00	-18.35	47.55	3	Horizontal	76	2.20	-	38.81	13.14	63.85			

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5240MHz_TX

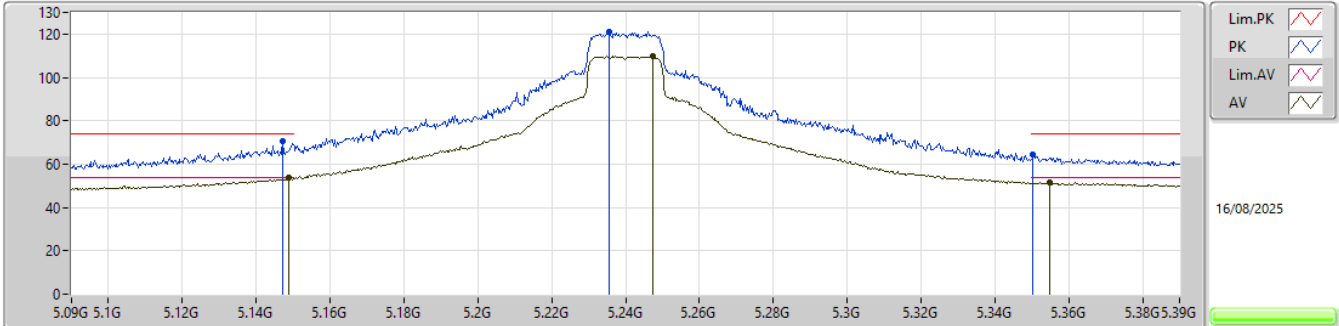


EUT_Y_2TX(0,1)
Setting 89
01-U-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1473G	70.78	74.00	-3.22	63.89	3	Vertical	4	1.80	-	32.79	6.64	32.54
AV	5.1488G	53.55	54.00	-0.45	46.65	3	Vertical	4	1.80	-	32.80	6.64	32.54
PK	5.2355G	121.15	Inf	-Inf	114.12	3	Vertical	4	1.80	-	32.90	6.65	32.52
AV	5.2475G	109.83	Inf	-Inf	102.80	3	Vertical	4	1.80	-	32.90	6.65	32.52
PK	5.3504G	64.67	74.00	-9.33	57.36	3	Vertical	4	1.80	-	33.10	6.71	32.50
AV	5.3549G	51.59	54.00	-2.41	44.25	3	Vertical	4	1.80	-	33.12	6.71	32.49

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5240MHz_TX

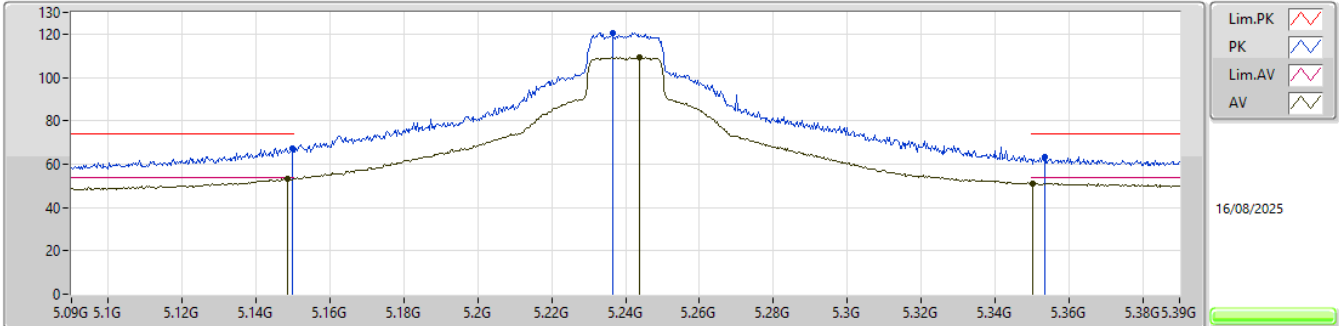


EUT_Y_2TX(0,1)
Setting 89
01-U-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1497G	67.38	74.00	-6.62	60.48	3	Horizontal	0	1.80	-	32.80	6.64	32.54
AV	5.1485G	53.20	54.00	-0.80	46.30	3	Horizontal	0	1.80	-	32.80	6.64	32.54
PK	5.2364G	120.49	Inf	-Inf	113.46	3	Horizontal	0	1.80	-	32.90	6.65	32.52
AV	5.2439G	109.18	Inf	-Inf	102.15	3	Horizontal	0	1.80	-	32.90	6.65	32.52
PK	5.3534G	63.54	74.00	-10.46	56.22	3	Horizontal	0	1.80	-	33.11	6.71	32.50
AV	5.3504G	51.09	54.00	-2.91	43.78	3	Horizontal	0	1.80	-	33.10	6.71	32.50

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5240MHz_TX

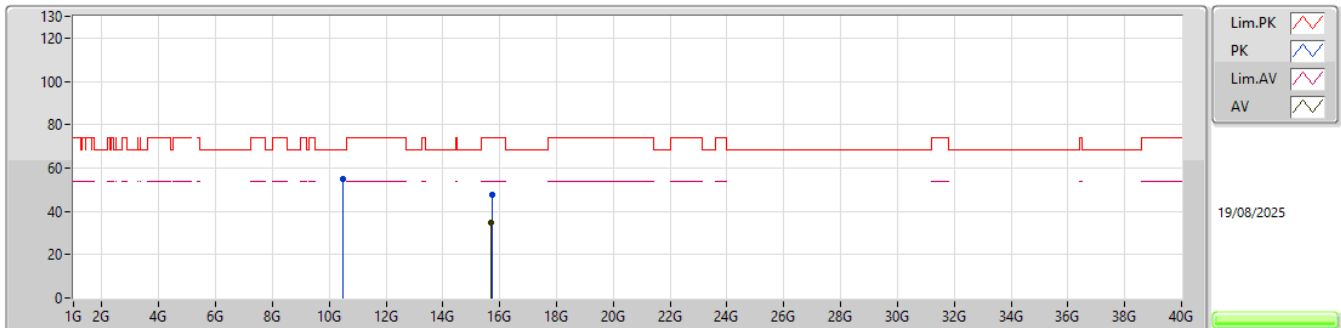


EUT Y_2TX(0,1)
Setting 89
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.48114G	54.86	68.20	-13.34	71.23	3	Vertical	40	2.10	-	39.26	11.09	66.72			
PK	15.72585G	47.83	74.00	-26.17	59.44	3	Vertical	109	1.75	-	39.06	13.23	63.90			
AV	15.71379G	34.95	54.00	-19.05	46.64	3	Vertical	109	1.75	-	38.98	13.22	63.89			

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5240MHz_TX

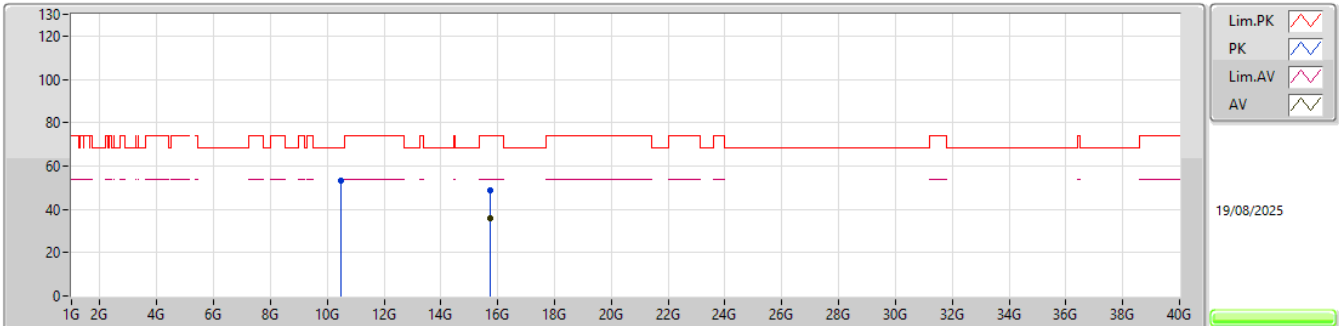


EUT_Y_2TX(0,1)
Setting 89
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.47646G	53.51	68.20	-14.69	69.89	3	Horizontal	63	2.90	-	39.25	11.09	66.72			
PK	15.71829G	48.56	74.00	-25.44	60.22	3	Horizontal	170	1.08	-	39.01	13.22	63.89			
AV	15.7158G	35.99	54.00	-18.01	47.67	3	Horizontal	170	1.08	-	38.99	13.22	63.89			

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5190MHz_TX

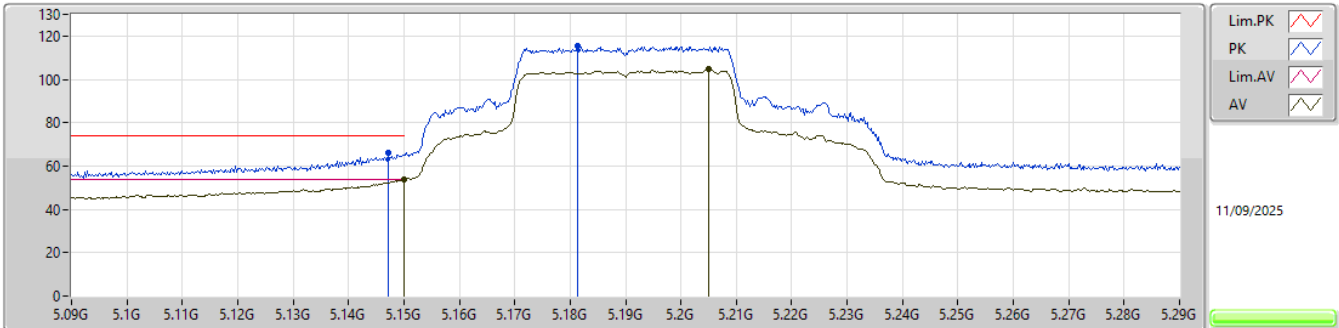


EUT_Y_2TX
Setting 69
03-C-B-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1472G	66.01	74.00	-7.99	59.55	3	Vertical	182	1.85	-	33.90	7.49	34.93			
AV	5.15G	53.56	54.00	-0.44	47.10	3	Vertical	182	1.85	-	33.90	7.49	34.93			
PK	5.1814G	115.27	Inf	-Inf	108.59	3	Vertical	182	1.85	-	34.03	7.57	34.92			
AV	5.205G	104.62	Inf	-Inf	97.82	3	Vertical	182	1.85	-	34.10	7.62	34.92			

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5190MHz_TX

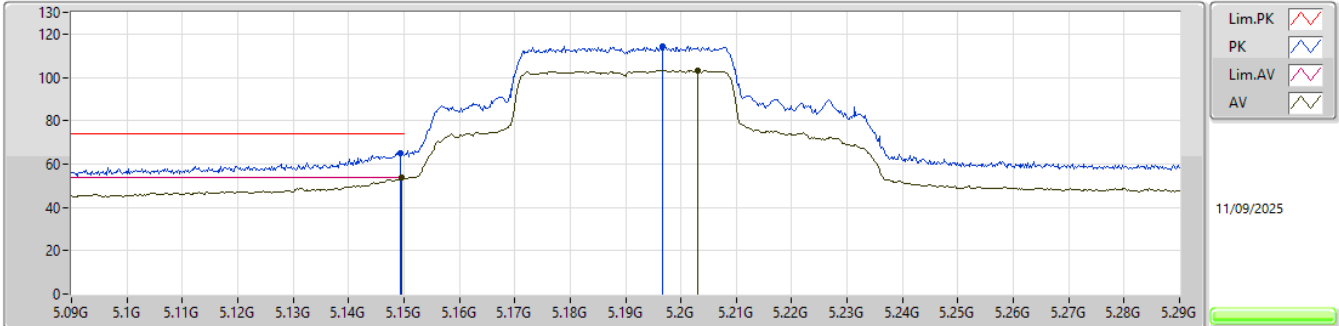


EUT_Y_2TX
Setting 69
03-C-B-5-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1494G	65.25	74.00	-8.75	58.79	3	Horizontal	183	1.32	-	33.90	7.49	34.93			
AV	5.1496G	53.79	54.00	-0.21	47.33	3	Horizontal	183	1.32	-	33.90	7.49	34.93			
PK	5.1966G	114.41	Inf	-Inf	107.64	3	Horizontal	183	1.32	-	34.09	7.60	34.92			
AV	5.203G	103.37	Inf	-Inf	96.58	3	Horizontal	183	1.32	-	34.10	7.61	34.92			

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5190MHz_TX

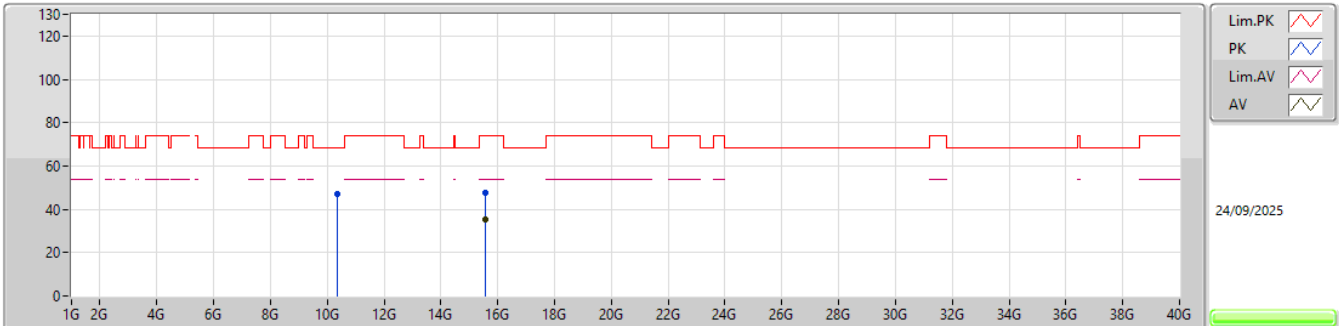


EUT_Y_2TX(0,1)
Setting 69
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36956G	47.02	68.20	-21.18	63.48	3	Vertical	299	1.42	-	39.20	11.02	66.68			
PK	15.58386G	47.61	74.00	-26.39	59.52	3	Vertical	247	1.98	-	38.80	13.13	63.84			
AV	15.57777G	35.24	54.00	-18.76	47.16	3	Vertical	247	1.98	-	38.80	13.12	63.84			

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5190MHz_TX

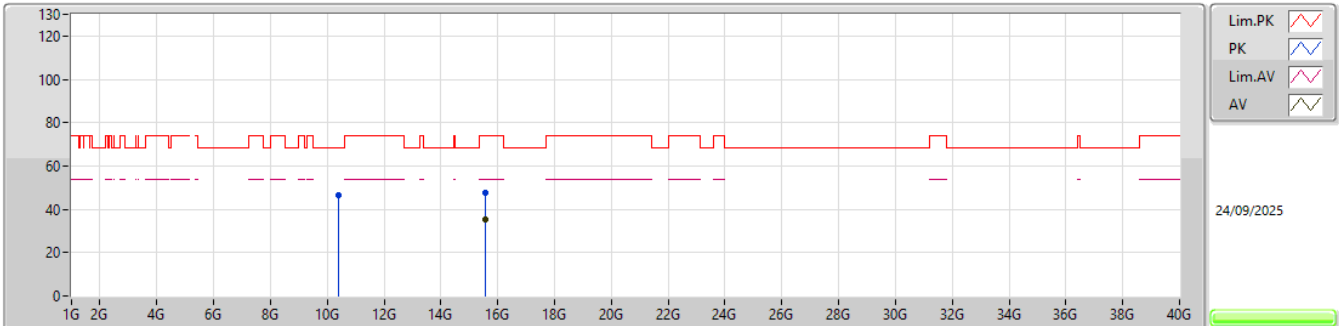


EUT_Y_2TX(0,1)
Setting 69
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38165G	46.66	68.20	-21.54	63.11	3	Horizontal	285	2.72	-	39.20	11.03	66.68			
PK	15.56313G	47.48	74.00	-26.52	59.40	3	Horizontal	255	2.50	-	38.80	13.11	63.83			
AV	15.58437G	35.31	54.00	-18.69	47.22	3	Horizontal	255	2.50	-	38.80	13.13	63.84			

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5230MHz_TX

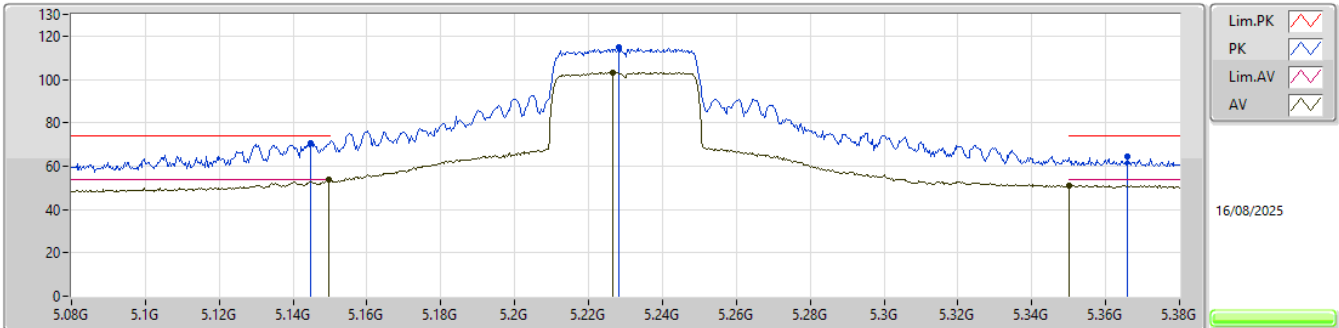


EUT_Y_2TX(0,1)
Setting 73
01-U-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1448G	70.75	74.00	-3.25	63.87	3	Vertical	1	1.80	-	32.79	6.64	32.55
AV	5.1496G	53.90	54.00	-0.10	47.00	3	Vertical	1	1.80	-	32.80	6.64	32.54
PK	5.2282G	114.68	Inf	-Inf	107.67	3	Vertical	1	1.80	-	32.90	6.64	32.53
AV	5.2264G	103.32	Inf	-Inf	96.31	3	Vertical	1	1.80	-	32.90	6.64	32.53
PK	5.3659G	64.45	74.00	-9.55	57.07	3	Vertical	1	1.80	-	33.16	6.71	32.49
AV	5.35G	51.26	54.00	-2.74	43.95	3	Vertical	1	1.80	-	33.10	6.71	32.50

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5230MHz_TX

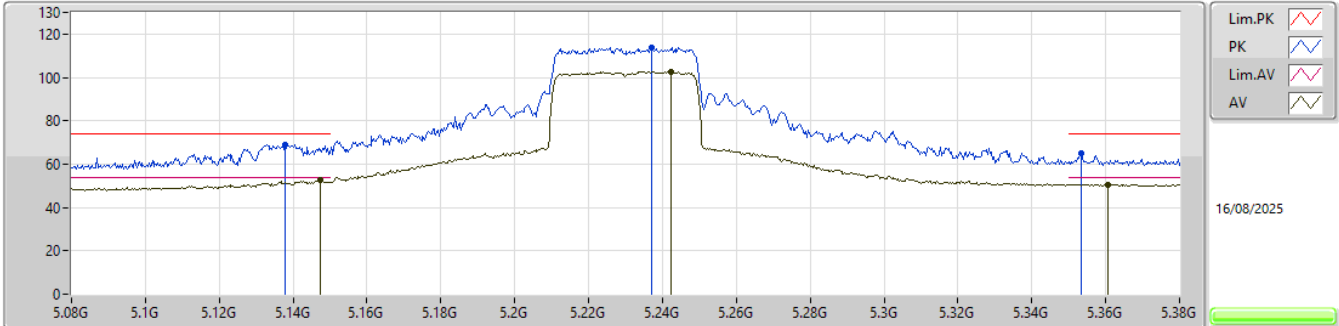


EUT_Y_2TX(0,1)
Setting 73
01-U-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1379G	69.08	74.00	-4.92	62.21	3	Horizontal	3	1.80	-	32.78	6.64	32.55
AV	5.1475G	52.77	54.00	-1.23	45.88	3	Horizontal	3	1.80	-	32.79	6.64	32.54
PK	5.2372G	113.91	Inf	-Inf	106.88	3	Horizontal	3	1.80	-	32.90	6.65	32.52
AV	5.2423G	102.67	Inf	-Inf	95.64	3	Horizontal	3	1.80	-	32.90	6.65	32.52
PK	5.3533G	64.82	74.00	-9.18	57.50	3	Horizontal	3	1.80	-	33.11	6.71	32.50
AV	5.3605G	50.70	54.00	-3.30	43.34	3	Horizontal	3	1.80	-	33.14	6.71	32.49

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5230MHz_TX

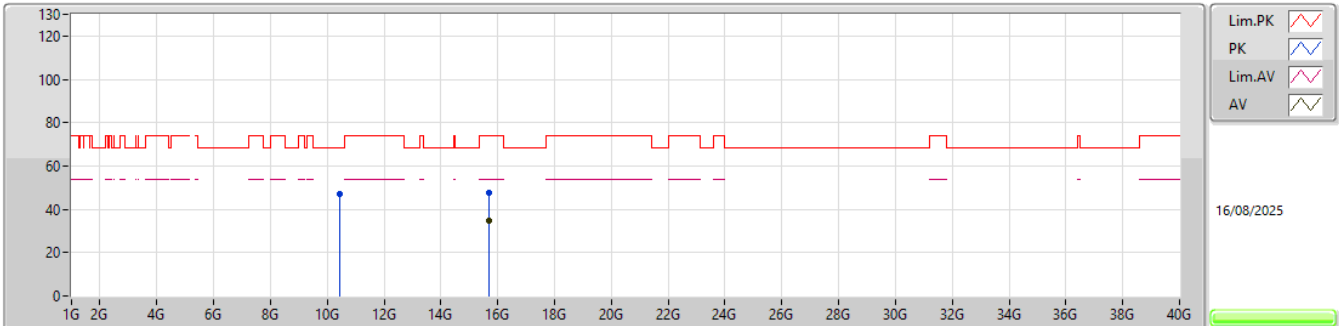


EUT_Y_2TX(0,1)
Setting 73
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.45928G	47.12	68.20	-21.08	63.53	3	Vertical	145	2.67	-	39.22	11.08	66.71			
PK	15.68418G	47.71	74.00	-26.29	59.49	3	Vertical	25	1.53	-	38.90	13.20	63.88			
AV	15.69615G	34.86	54.00	-19.14	46.63	3	Vertical	25	1.53	-	38.90	13.21	63.88			

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5230MHz_TX

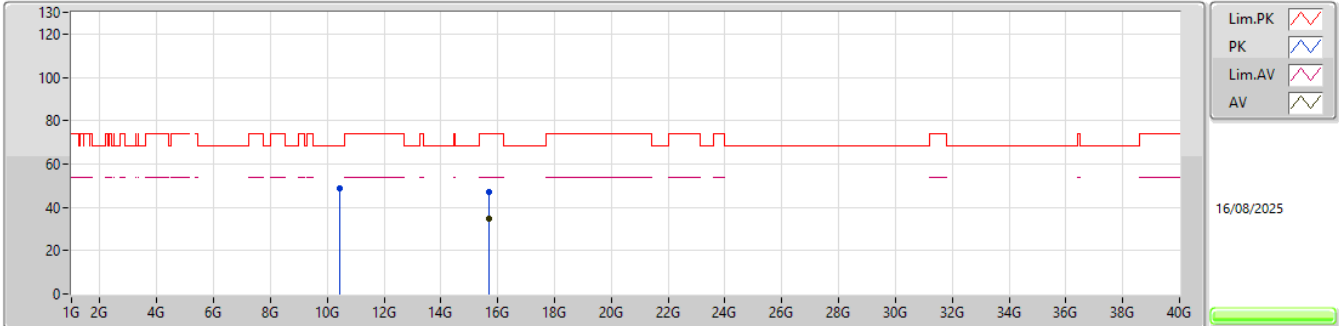


EUT_Y_2TX(0,1)
Setting 73
06-E-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.44968G	48.80	68.20	-19.40	65.24	3	Horizontal	51	1.10	-	39.20	11.07	66.71			
PK	15.69222G	47.09	74.00	-26.91	58.87	3	Horizontal	148	2.36	-	38.90	13.20	63.88			
AV	15.70128G	34.73	54.00	-19.27	46.50	3	Horizontal	148	2.36	-	38.91	13.21	63.89			

5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5210MHz_TX

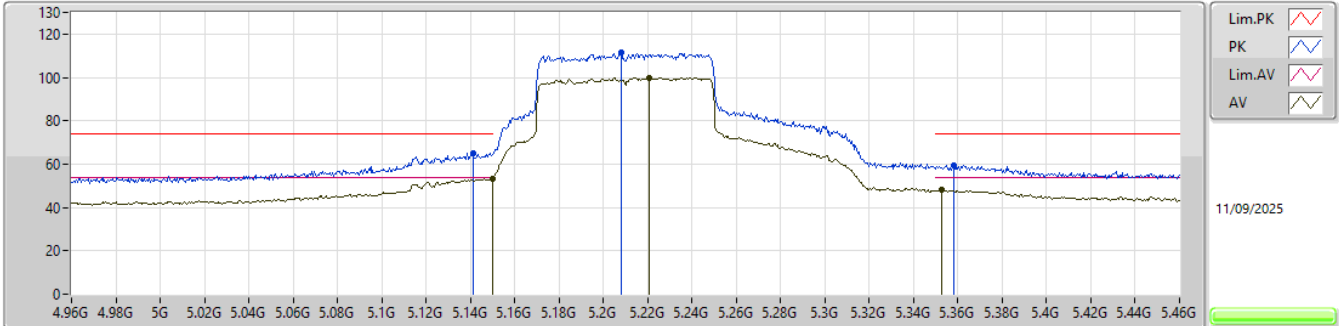


EUT_Y_2TX
Setting 67
03-C-B-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.141G	65.16	74.00	-8.84	58.72	3	Vertical	179	2.02	-	33.90	7.47	34.93
AV	5.15G	53.51	54.00	-0.49	47.05	3	Vertical	179	2.02	-	33.90	7.49	34.93
PK	5.208G	111.68	Inf	-Inf	104.88	3	Vertical	179	2.02	-	34.10	7.62	34.92
AV	5.2205G	99.94	Inf	-Inf	93.12	3	Vertical	179	2.02	-	34.10	7.64	34.92
PK	5.358G	59.53	74.00	-14.47	52.08	3	Vertical	179	2.02	-	34.53	7.81	34.89
AV	5.3525G	48.12	54.00	-5.88	40.70	3	Vertical	179	2.02	-	34.51	7.80	34.89

5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5210MHz_TX

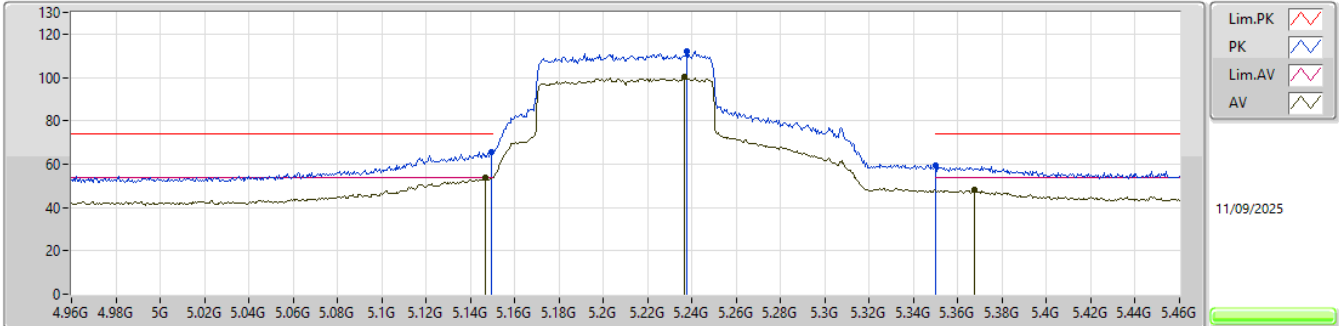


EUT_Y_2TX
Setting 67
03-C-B-5-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1495G	65.78	74.00	-8.22	59.32	3	Horizontal	183	1.31	-	33.90	7.49	34.93			
AV	5.147G	53.59	54.00	-0.41	47.13	3	Horizontal	183	1.31	-	33.90	7.49	34.93			
PK	5.2375G	111.97	Inf	-Inf	105.12	3	Horizontal	183	1.31	-	34.10	7.66	34.91			
AV	5.2365G	100.30	Inf	-Inf	93.45	3	Horizontal	183	1.31	-	34.10	7.66	34.91			
PK	5.35G	59.38	74.00	-14.62	51.97	3	Horizontal	183	1.31	-	34.50	7.80	34.89			
AV	5.3675G	47.94	54.00	-6.06	40.44	3	Horizontal	183	1.31	-	34.57	7.82	34.89			

5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5210MHz_TX

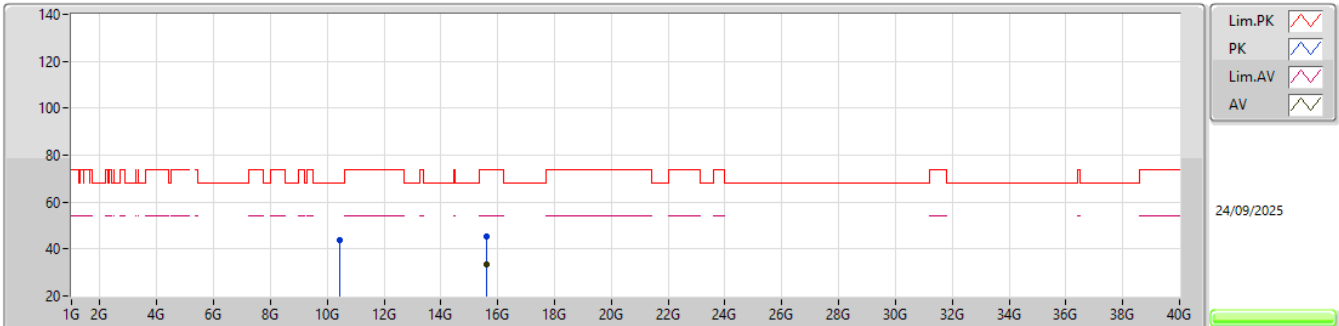


EUT_Y_2TX(0,1)
Setting 67
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42441G	44.02	68.20	-24.18	60.46	3	Vertical	266	3.00	-	39.20	11.06	66.70			
PK	15.62514G	45.51	74.00	-28.49	57.36	3	Vertical	195	1.24	-	38.85	13.16	63.86			
AV	15.61728G	33.47	54.00	-20.53	45.34	3	Vertical	195	1.24	-	38.83	13.15	63.85			

5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5210MHz_TX

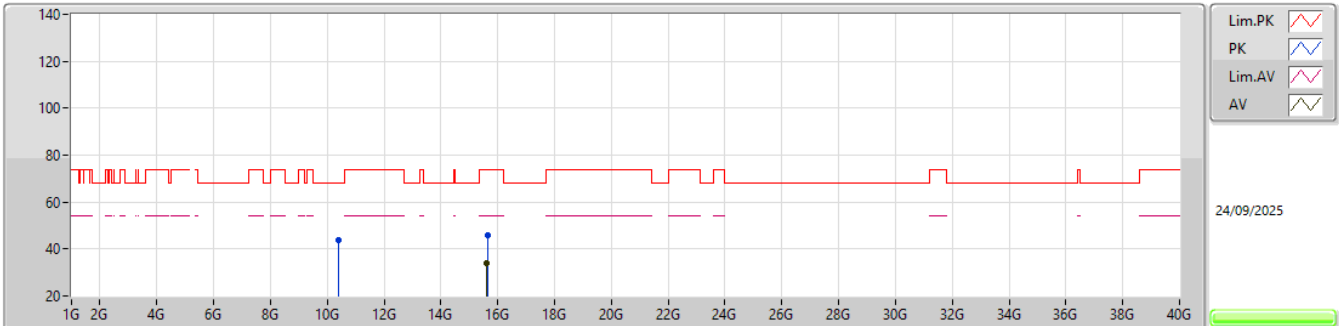


EUT_Y_2TX(0,1)
Setting 67
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41706G	43.89	68.20	-24.31	60.34	3	Horizontal	270	1.60	-	39.20	11.05	66.70			
PK	15.63705G	45.94	74.00	-28.06	57.76	3	Horizontal	122	2.62	-	38.87	13.17	63.86			
AV	15.61851G	33.96	54.00	-20.04	45.83	3	Horizontal	122	2.62	-	38.84	13.15	63.86			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

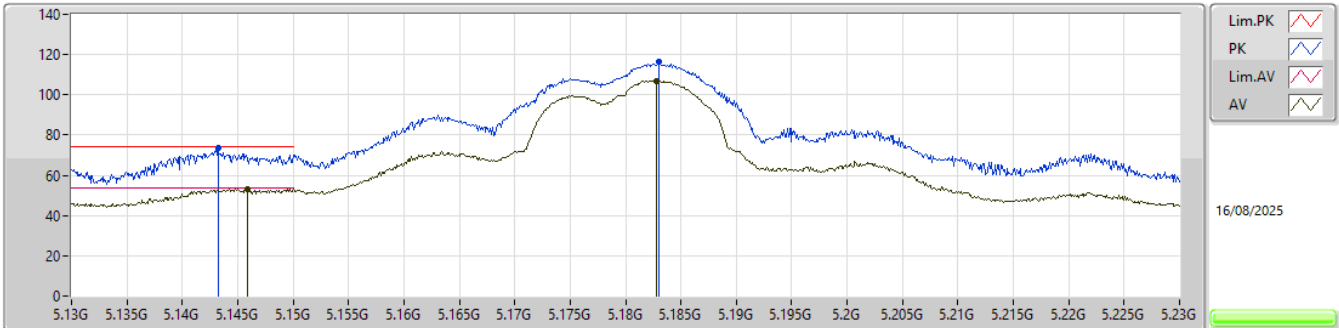


EUT_Y_4TX
SET 79
80\79
-0.18\0.63

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1432G	73.37	74.00	-0.63	66.49	3	Vertical	2	1.80	79	32.79	6.64	32.55			
AV	5.1459G	53.37	54.00	-0.63	46.48	3	Vertical	2	1.80	79	32.79	6.64	32.54			
PK	5.183G	116.17	Inf	-Inf	109.21	3	Vertical	2	1.80	79	32.87	6.63	32.54			
AV	5.1828G	106.87	Inf	-Inf	99.91	3	Vertical	2	1.80	79	32.87	6.63	32.54			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

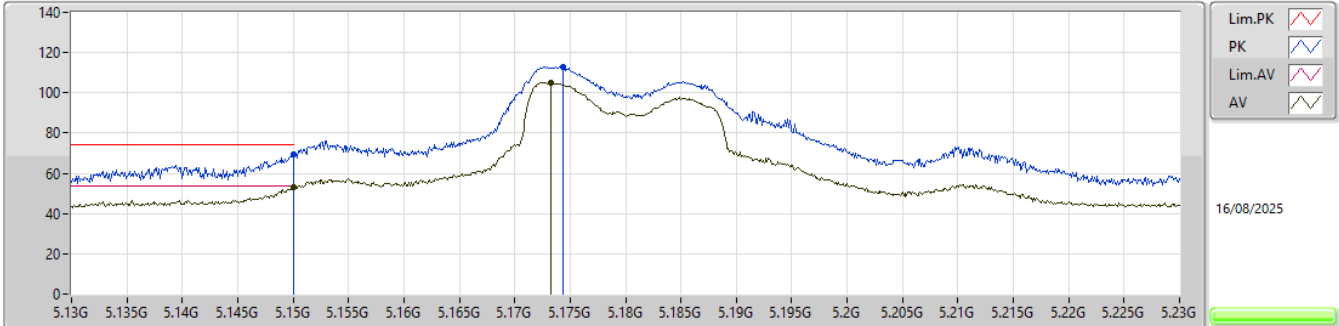


EUT_Y_4TX
SET 75
79\67\78\73\75\76\75
-2.82\8.20\ -2.02\4.00\1.29\ -0.47\0.99

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.15G	69.63	74.00	-4.37	62.73	3	Horizontal	360	1.80	75	32.80	6.64	32.54			
AV	5.15G	53.01	54.00	-0.99	46.11	3	Horizontal	360	1.80	75	32.80	6.64	32.54			
PK	5.1744G	112.85	Inf	-Inf	105.90	3	Horizontal	360	1.80	75	32.85	6.64	32.54			
AV	5.1733G	104.83	Inf	-Inf	97.88	3	Horizontal	360	1.80	75	32.85	6.64	32.54			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

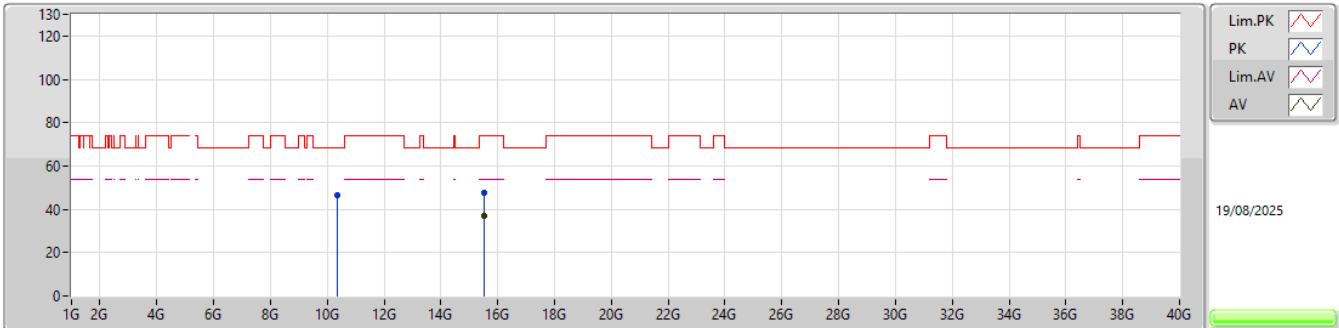


EUT_Y_4TX
Setting 75
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36381G	46.41	68.20	-21.79	62.86	3	Vertical	80	2.21	-	39.20	11.02	66.67			
PK	15.52989G	47.68	74.00	-26.32	59.53	3	Vertical	223	2.04	-	38.88	13.09	63.82			
AV	15.52806G	36.81	54.00	-17.19	48.65	3	Vertical	223	2.04	-	38.89	13.09	63.82			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

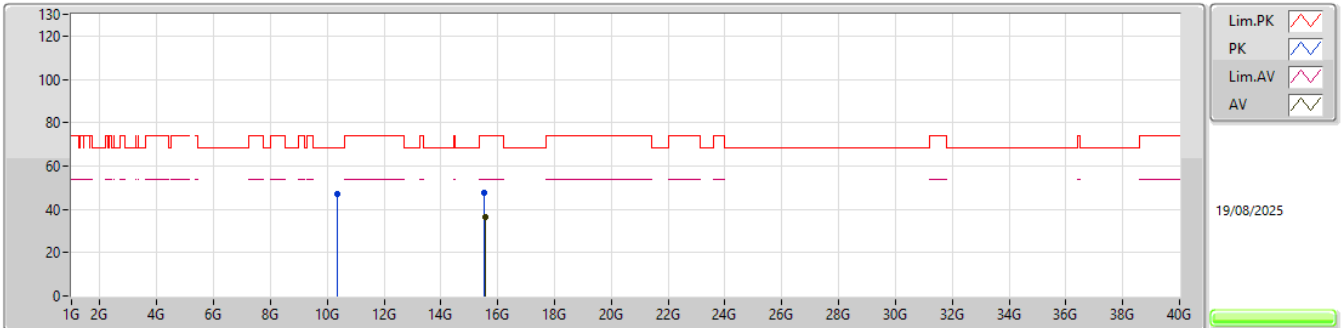


EUT_Y_4TX
Setting 75
06-E-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.35478G	46.88	68.20	-21.32	63.34	3	Horizontal	34	1.42	-	39.20	11.01	66.67			
PK	15.52647G	47.64	74.00	-26.36	59.48	3	Horizontal	190	1.34	-	38.89	13.09	63.82			
AV	15.5499G	36.60	54.00	-17.40	48.53	3	Horizontal	190	1.34	-	38.80	13.10	63.83			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

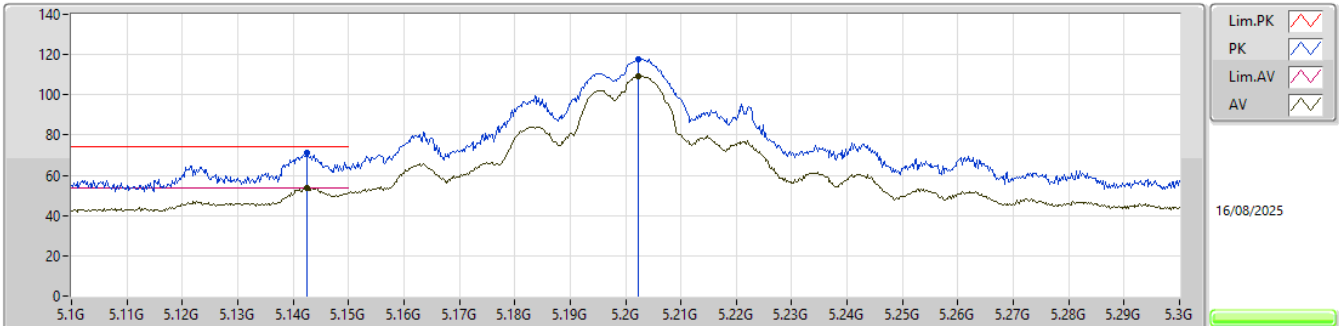


EUT_Y_4TX
SET93
80\108\94\87\90\91\92\93
9.15\ -3.85\ -1.39\ 4.78\ 3.62\ 1.75\ 1.25\ 0.05

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1426G	71.05	74.00	-2.95	64.17	3	Vertical	360	1.80	93	32.79	6.64	32.55			
AV	5.1426G	53.95	54.00	-0.05	47.07	3	Vertical	360	1.80	93	32.79	6.64	32.55			
PK	5.2024G	117.89	Inf	-Inf	110.89	3	Vertical	360	1.80	93	32.90	6.63	32.53			
AV	5.2022G	109.07	Inf	-Inf	102.07	3	Vertical	360	1.80	93	32.90	6.63	32.53			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

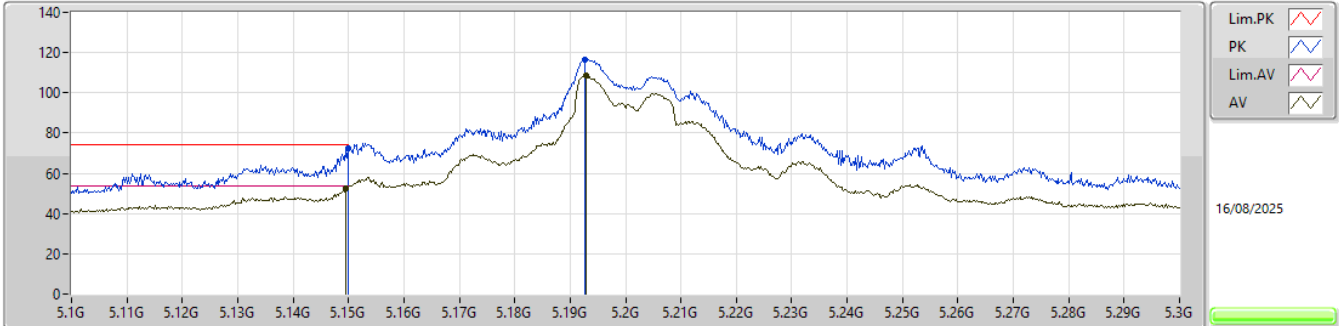


EUT_Y_4TX
SET 91
93\89\91\92\91
-0.97\2.10\1.14\0.02\1.22

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.15G	72.61	74.00	-1.39	65.71	3	Horizontal	4	1.80	91	32.80	6.64	32.54			
AV	5.1496G	52.78	54.00	-1.22	45.88	3	Horizontal	4	1.80	91	32.80	6.64	32.54			
PK	5.1926G	116.69	Inf	-Inf	109.70	3	Horizontal	4	1.80	91	32.89	6.63	32.53			
AV	5.1928G	108.64	Inf	-Inf	101.65	3	Horizontal	4	1.80	91	32.89	6.63	32.53			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

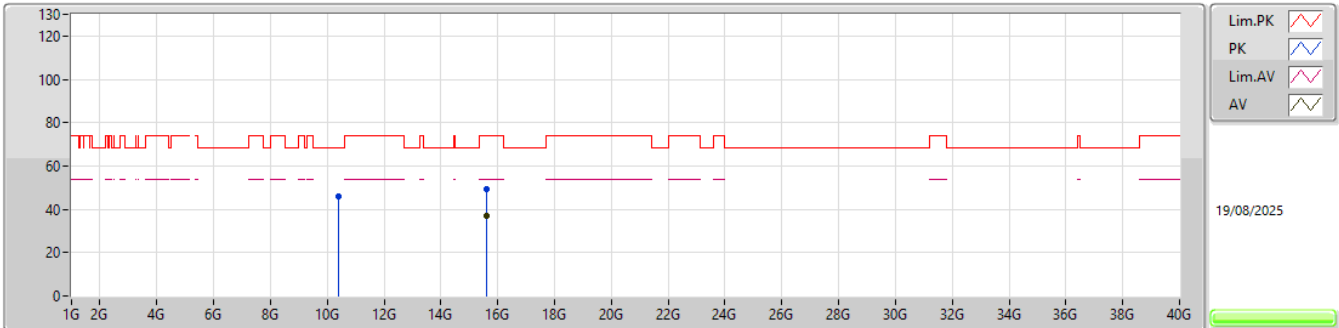


EUT_Y_4TX
Setting 91
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3946G	45.92	68.20	-22.28	62.37	3	Vertical	8	1.56	-	39.20	11.04	66.69			
PK	15.6124G	49.19	74.00	-24.81	61.07	3	Vertical	247	2.01	-	38.82	13.15	63.85			
AV	15.60264G	36.80	54.00	-17.20	48.70	3	Vertical	247	2.01	-	38.81	13.14	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

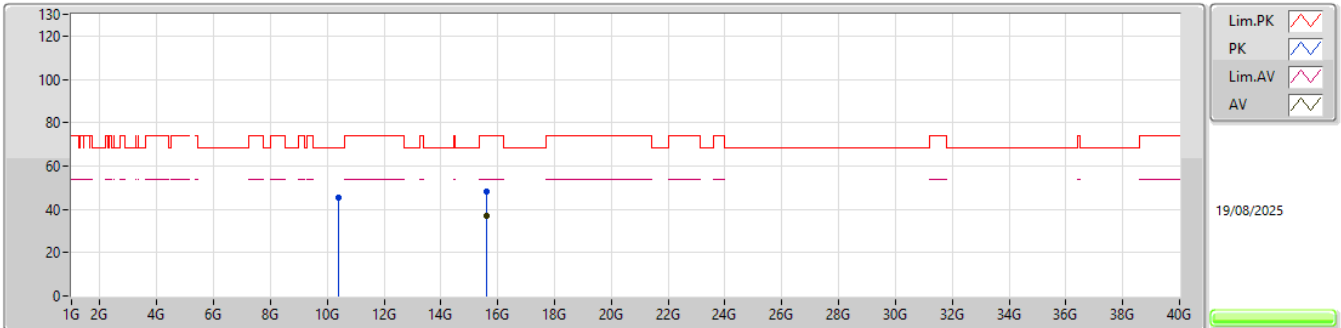


EUT_Y_4TX
Setting 91
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39133G	45.65	68.20	-22.55	62.10	3	Horizontal	238	1.95	-	39.20	11.03	66.68			
PK	15.60963G	48.19	74.00	-25.81	60.07	3	Horizontal	310	1.59	-	38.82	13.15	63.85			
AV	15.61035G	36.89	54.00	-17.11	48.77	3	Horizontal	310	1.59	-	38.82	13.15	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

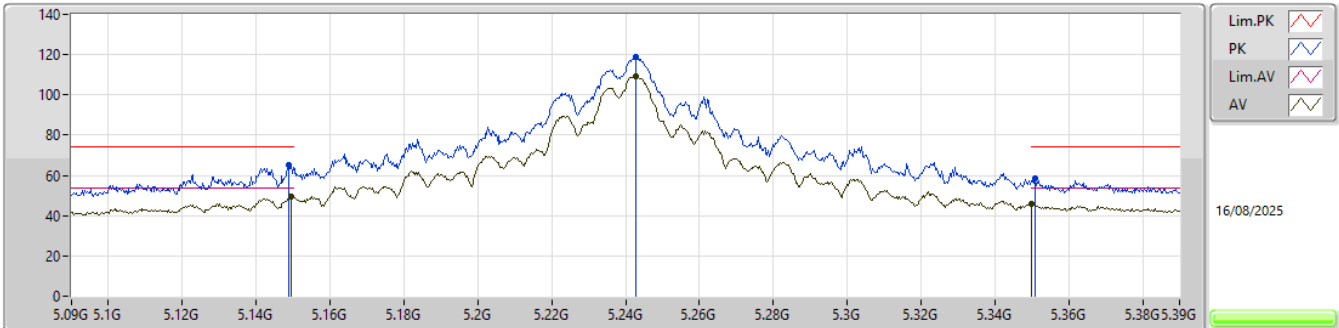


EUT_Y_4TX
SET 108
80\108
10.60\4.45

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1488G	65.30	74.00	-8.70	58.40	3	Vertical	359	1.80	108	32.80	6.64	32.54			
AV	5.1494G	49.55	54.00	-4.45	42.65	3	Vertical	359	1.80	108	32.80	6.64	32.54			
PK	5.2427G	118.67	Inf	-Inf	111.64	3	Vertical	359	1.80	108	32.90	6.65	32.52			
AV	5.2427G	109.52	Inf	-Inf	102.49	3	Vertical	359	1.80	108	32.90	6.65	32.52			
PK	5.351G	58.60	74.00	-15.40	51.29	3	Vertical	359	1.80	108	33.10	6.71	32.50			
AV	5.35G	45.78	54.00	-8.22	38.47	3	Vertical	359	1.80	108	33.10	6.71	32.50			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

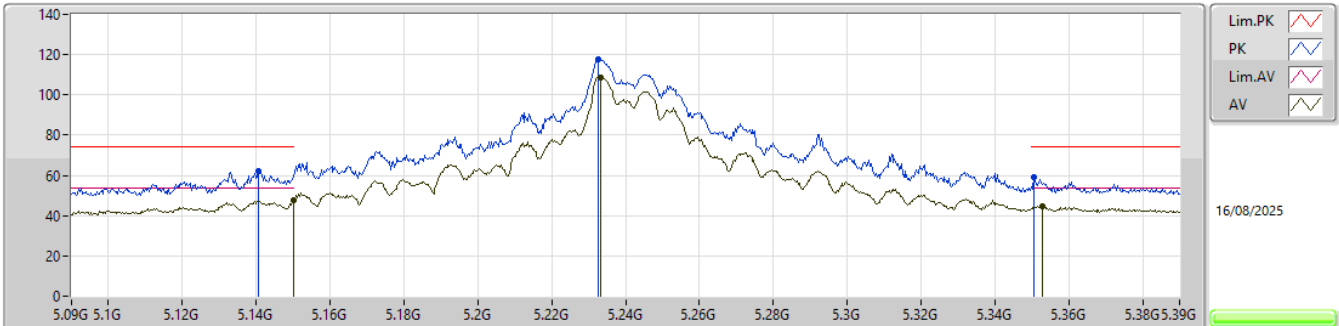


EUT_Y_4TX
SET 108
108
6.47

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1407G	62.25	74.00	-11.75	55.38	3	Horizontal	0	1.80	108	32.78	6.64	32.55			
AV	5.15G	47.53	54.00	-6.47	40.63	3	Horizontal	0	1.80	108	32.80	6.64	32.54			
PK	5.2325G	117.61	Inf	-Inf	110.58	3	Horizontal	0	1.80	108	32.90	6.65	32.52			
AV	5.2331G	108.74	Inf	-Inf	101.71	3	Horizontal	0	1.80	108	32.90	6.65	32.52			
PK	5.3507G	58.96	74.00	-15.04	51.65	3	Horizontal	0	1.80	108	33.10	6.71	32.50			
AV	5.3528G	44.48	54.00	-9.52	37.16	3	Horizontal	0	1.80	108	33.11	6.71	32.50			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

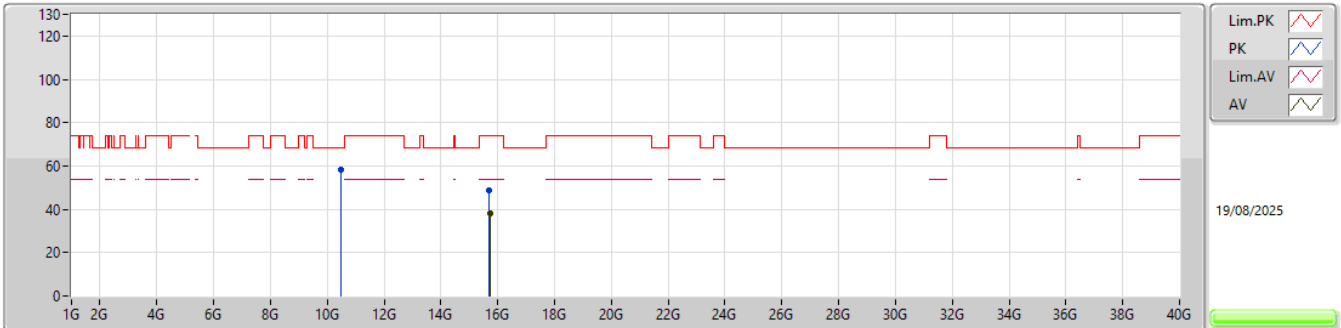


EUT_Y_4TX
Setting 108
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47883G	58.26	68.20	-9.94	74.63	3	Vertical	15	1.91	-	39.26	11.09	66.72			
PK	15.71058G	48.65	74.00	-25.35	60.36	3	Vertical	345	1.80	-	38.96	13.22	63.89			
AV	15.72249G	37.86	54.00	-16.14	49.49	3	Vertical	345	1.80	-	39.03	13.23	63.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

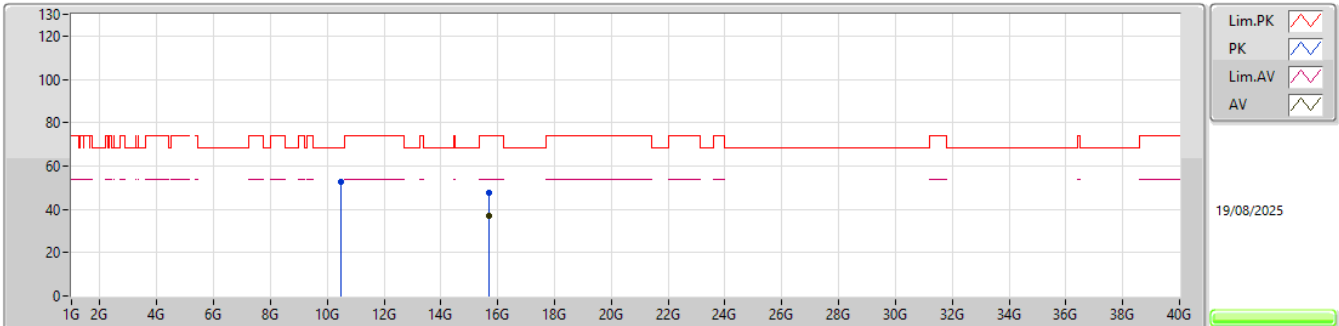


EUT_Y_4TX
Setting 108
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48408G	52.58	68.20	-15.62	68.94	3	Horizontal	55	1.79	-	39.27	11.09	66.72			
PK	15.70779G	47.67	74.00	-26.33	59.39	3	Horizontal	5	1.80	-	38.95	13.22	63.89			
AV	15.70989G	37.10	54.00	-16.90	48.81	3	Horizontal	5	1.80	-	38.96	13.22	63.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

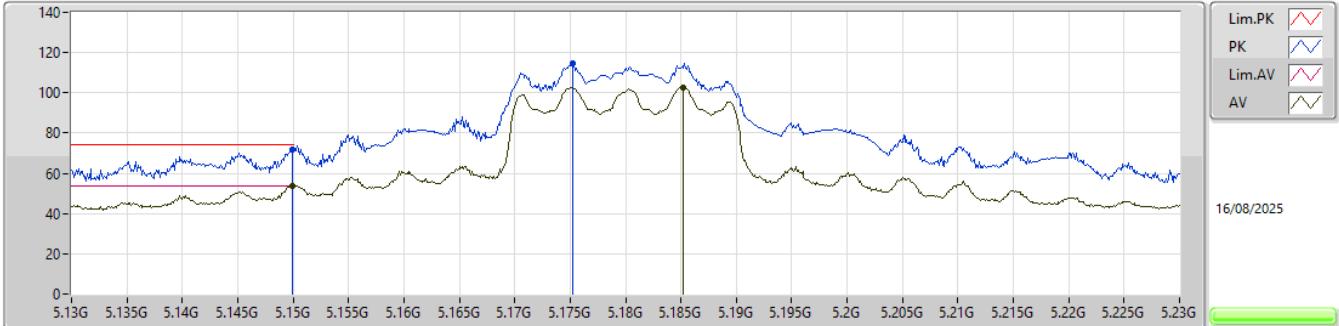


EUT_Y_4TX
SET 73
80\50\84\67\75\71\73
-7.45\12.70\10.66\5.07\3.11\2.89\0.23

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1499G	71.54	74.00	-2.46	64.64	3	Vertical	0	1.05	73	32.80	6.64	32.54			
AV	5.1499G	53.77	54.00	-0.23	46.87	3	Vertical	0	1.05	73	32.80	6.64	32.54			
PK	5.1752G	114.66	Inf	-Inf	107.72	3	Vertical	0	1.05	73	32.85	6.63	32.54			
AV	5.1852G	102.72	Inf	-Inf	95.76	3	Vertical	0	1.05	73	32.87	6.63	32.54			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

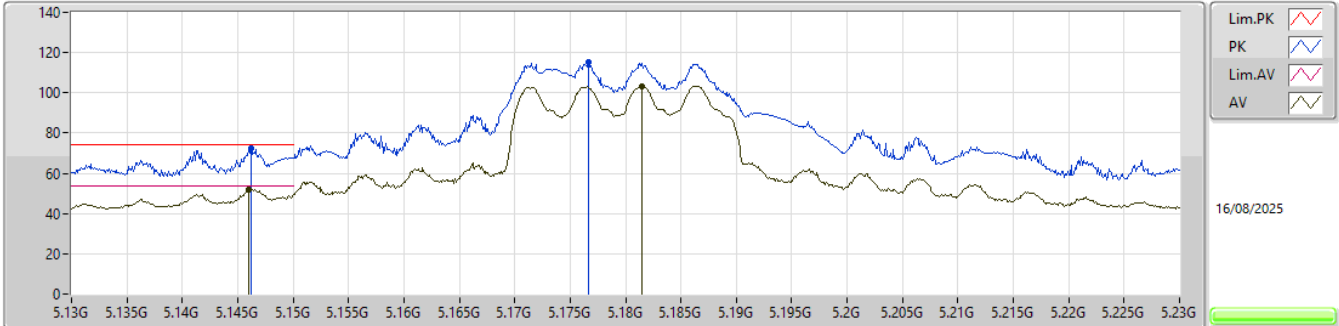


EUT_Y_4TX
SET 73
73
1.73

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1462G	72.27	74.00	-1.73	65.38	3	Horizontal	3	1.80	73	32.79	6.64	32.54				
AV	5.146G	52.12	54.00	-1.88	45.23	3	Horizontal	3	1.80	73	32.79	6.64	32.54				
PK	5.1767G	114.96	Inf	-Inf	108.02	3	Horizontal	3	1.80	73	32.85	6.63	32.54				
AV	5.1815G	103.38	Inf	-Inf	96.43	3	Horizontal	3	1.80	73	32.86	6.63	32.54				

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

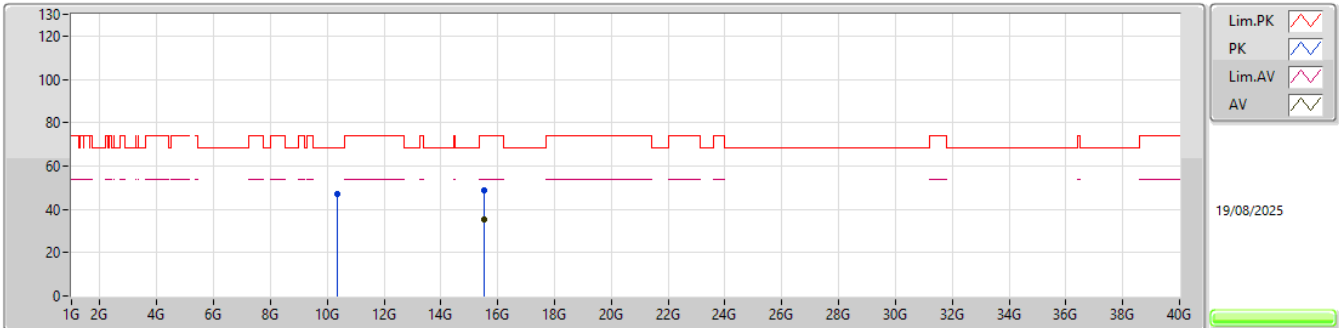


EUT_Y_4TX
Setting 73
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36486G	47.08	68.20	-21.12	63.53	3	Vertical	0	1.80	-	39.20	11.02	66.67			
PK	15.53568G	48.48	74.00	-25.52	60.35	3	Vertical	20	1.80	-	38.86	13.09	63.82			
AV	15.53451G	35.35	54.00	-18.65	47.22	3	Vertical	20	1.80	-	38.86	13.09	63.82			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

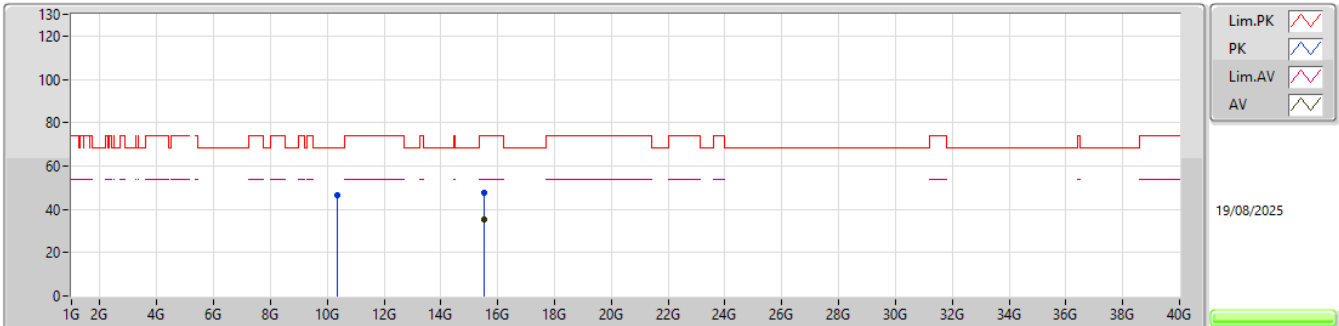


EUT_Y_4TX
Setting 73
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.34626G	46.75	68.20	-21.45	63.22	3	Horizontal	210	2.83	-	39.19	11.01	66.67			
PK	15.53577G	47.44	74.00	-26.56	59.30	3	Horizontal	354	1.75	-	38.86	13.10	63.82			
AV	15.53427G	35.25	54.00	-18.75	47.12	3	Horizontal	354	1.75	-	38.86	13.09	63.82			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

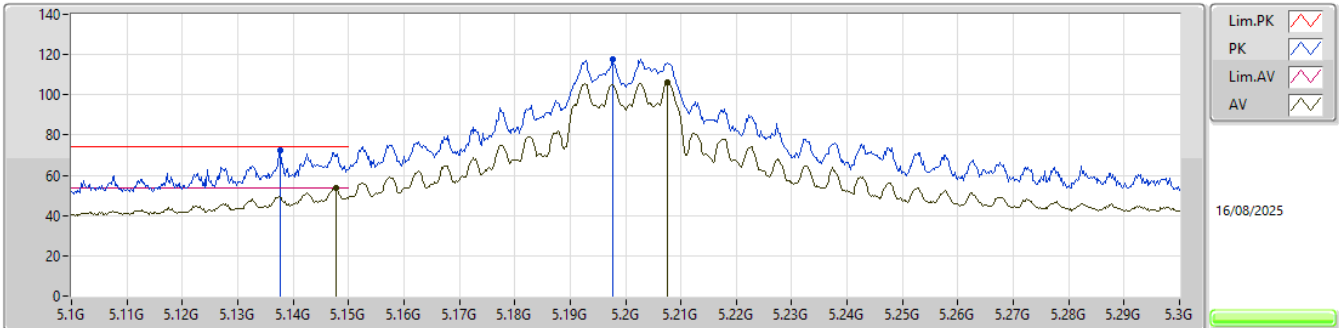


EUT_Y_4TX
SET 86
80\103\76\89\83\86
5.90\ -7.86\8.54\ -3.59\3.79\0.29

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1376G	72.43	74.00	-1.57	65.56	3	Vertical	4	2.51	86	32.78	6.64	32.55
AV	5.1478G	53.71	54.00	-0.29	46.81	3	Vertical	4	2.51	86	32.80	6.64	32.54
PK	5.1976G	117.59	Inf	-Inf	110.59	3	Vertical	4	2.51	86	32.90	6.63	32.53
AV	5.2076G	105.94	Inf	-Inf	98.94	3	Vertical	4	2.51	86	32.90	6.63	32.53

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

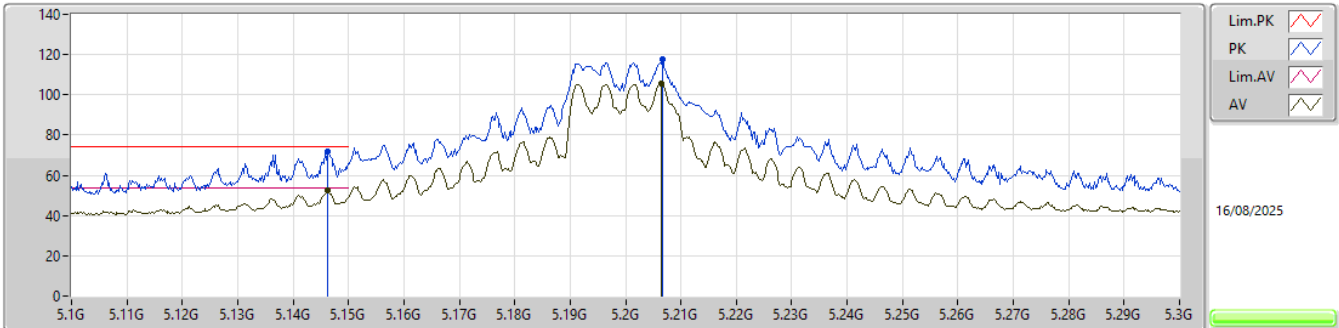


EUT_Y_4TX
SET 84
86\84\85\84
-0.39\2.26\ -0.44\1.73

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1462G	71.95	74.00	-2.05	65.06	3	Horizontal	2	1.80	84	32.79	6.64	32.54			
AV	5.1462G	52.27	54.00	-1.73	45.38	3	Horizontal	2	1.80	84	32.79	6.64	32.54			
PK	5.2066G	117.67	Inf	-Inf	110.67	3	Horizontal	2	1.80	84	32.90	6.63	32.53			
AV	5.2064G	105.57	Inf	-Inf	98.57	3	Horizontal	2	1.80	84	32.90	6.63	32.53			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

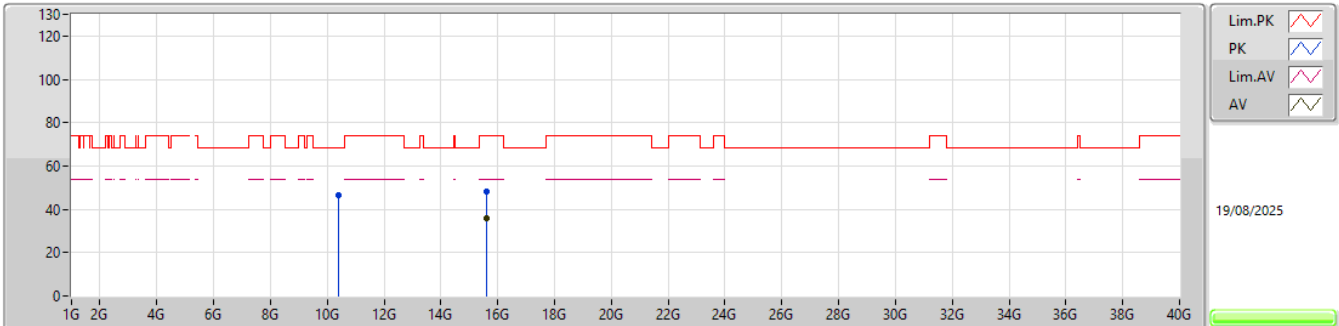


EUT_Y_4TX
Setting 84
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39088G	46.31	68.20	-21.89	62.76	3	Vertical	45	1.57	-	39.20	11.03	66.68			
PK	15.60249G	48.24	74.00	-25.76	60.15	3	Vertical	5	1.71	-	38.80	13.14	63.85			
AV	15.60144G	35.75	54.00	-18.25	47.66	3	Vertical	5	1.71	-	38.80	13.14	63.85			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

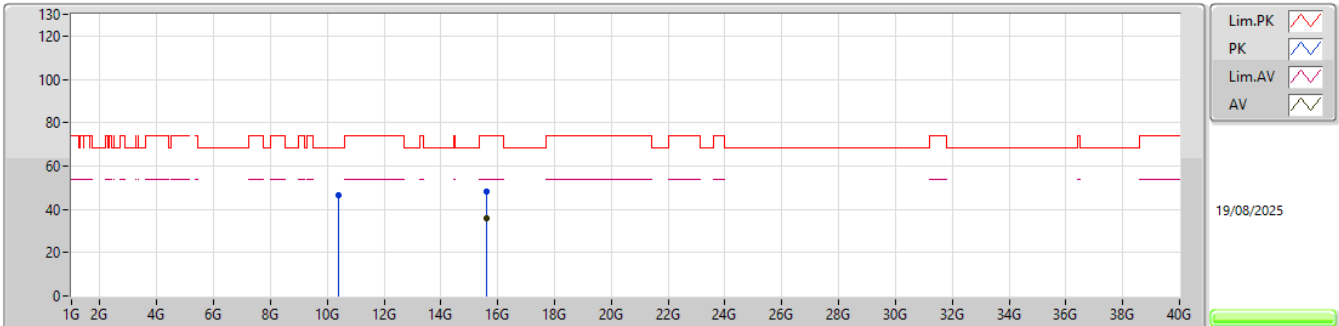


EUT_Y_4TX
Setting 84
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40765G	46.49	68.20	-21.71	62.94	3	Horizontal	350	2.37	-	39.20	11.04	66.69			
PK	15.60669G	48.36	74.00	-25.64	60.26	3	Horizontal	354	2.45	-	38.81	13.14	63.85			
AV	15.60054G	35.68	54.00	-18.32	47.59	3	Horizontal	354	2.45	-	38.80	13.14	63.85			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

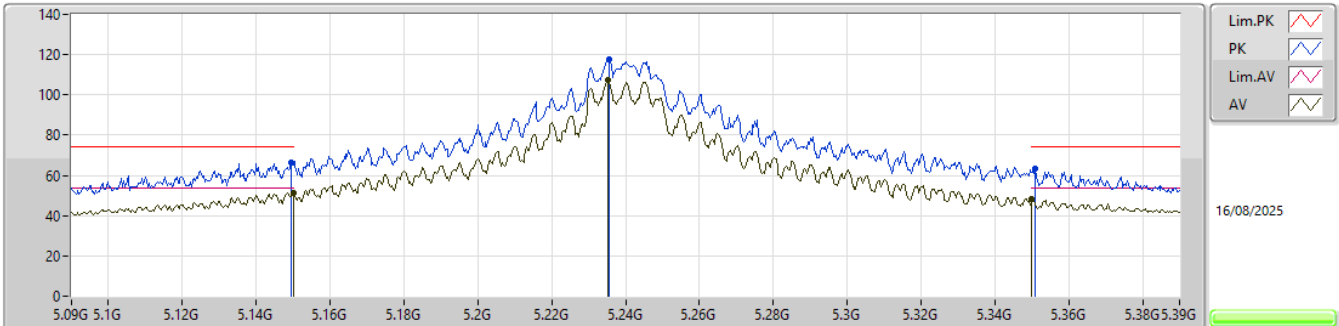


EUT Y_4TX
SET 108
75\108
11.56\2.57

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1494G	66.47	74.00	-7.53	59.57	3	Vertical	358	1.05	108	32.80	6.64	32.54
AV	5.15G	51.43	54.00	-2.57	44.53	3	Vertical	358	1.05	108	32.80	6.64	32.54
PK	5.2355G	117.80	Inf	-Inf	110.77	3	Vertical	358	1.05	108	32.90	6.65	32.52
AV	5.2352G	107.13	Inf	-Inf	100.10	3	Vertical	358	1.05	108	32.90	6.65	32.52
PK	5.351G	63.43	74.00	-10.57	56.12	3	Vertical	358	1.05	108	33.10	6.71	32.50
AV	5.35G	48.06	54.00	-5.94	40.75	3	Vertical	358	1.05	108	33.10	6.71	32.50

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

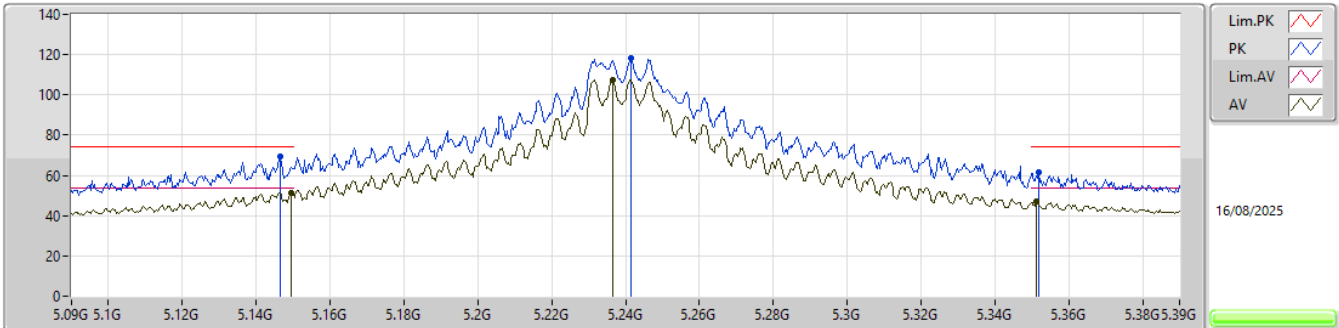


EUT_Y_4TX
SET 108
108
2.87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1464G	69.29	74.00	-4.71	62.40	3	Horizontal	3	1.80	108	32.79	6.64	32.54			
AV	5.1494G	51.13	54.00	-2.87	44.23	3	Horizontal	3	1.80	108	32.80	6.64	32.54			
PK	5.2415G	117.99	Inf	-Inf	110.96	3	Horizontal	3	1.80	108	32.90	6.65	32.52			
AV	5.2364G	107.58	Inf	-Inf	100.55	3	Horizontal	3	1.80	108	32.90	6.65	32.52			
PK	5.3519G	61.84	74.00	-12.16	54.52	3	Horizontal	3	1.80	108	33.11	6.71	32.50			
AV	5.3513G	46.90	54.00	-7.10	39.58	3	Horizontal	3	1.80	108	33.11	6.71	32.50			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

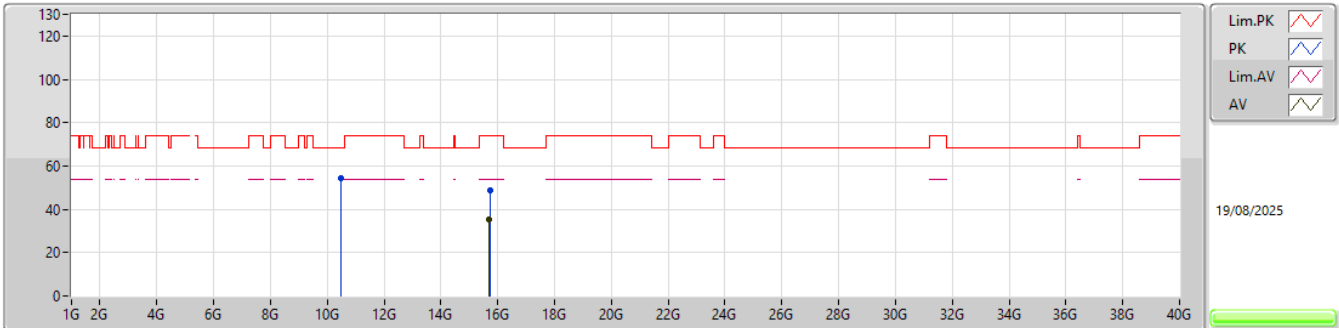


EUT_Y_4TX
Setting 108
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.471G	54.42	68.20	-13.78	70.81	3	Vertical	34	1.80	-	39.24	11.09	66.72			
PK	15.71817G	48.89	74.00	-25.11	60.55	3	Vertical	11	1.72	-	39.01	13.22	63.89			
AV	15.70944G	35.32	54.00	-18.68	47.03	3	Vertical	11	1.72	-	38.96	13.22	63.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

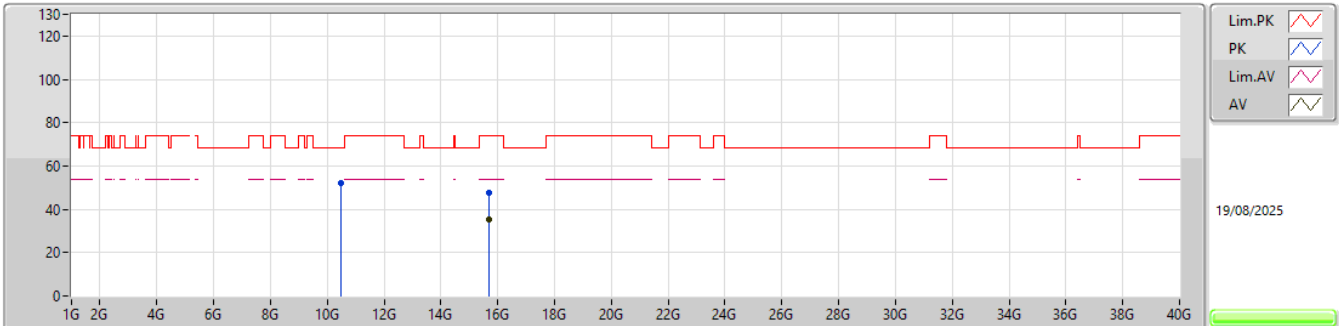


EUT_Y_4TX
Setting 108
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4836G	52.22	68.20	-15.98	68.58	3	Horizontal	56.1	1.80	-	39.27	11.09	66.72			
PK	15.71472G	47.56	74.00	-26.44	59.24	3	Horizontal	7	1.79	-	38.99	13.22	63.89			
AV	15.71004G	35.14	54.00	-18.86	46.85	3	Horizontal	7	1.79	-	38.96	13.22	63.89			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

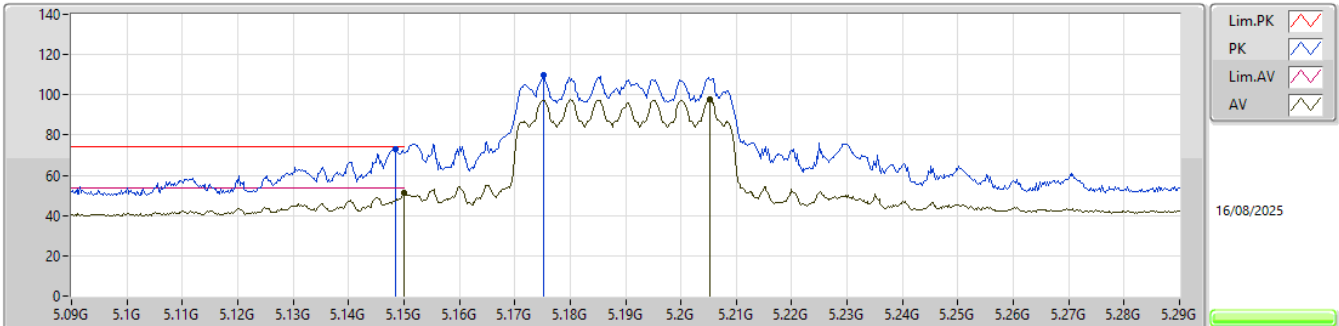


EUT_Y_4TX
SET 66
80\40\84\62\73\68\66\67\66
-13.41\12.56\17.62\4.73\4.81\0.44\1.24\0.43\1.11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1484G	72.89	74.00	-1.11	65.99	3	Vertical	0	1.06	66	32.80	6.64	32.54			
AV	5.15G	51.19	54.00	-2.81	44.29	3	Vertical	0	1.06	66	32.80	6.64	32.54			
PK	5.1752G	109.57	Inf	-Inf	102.63	3	Vertical	0	1.06	66	32.85	6.63	32.54			
AV	5.2052G	97.93	Inf	-Inf	90.93	3	Vertical	0	1.06	66	32.90	6.63	32.53			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

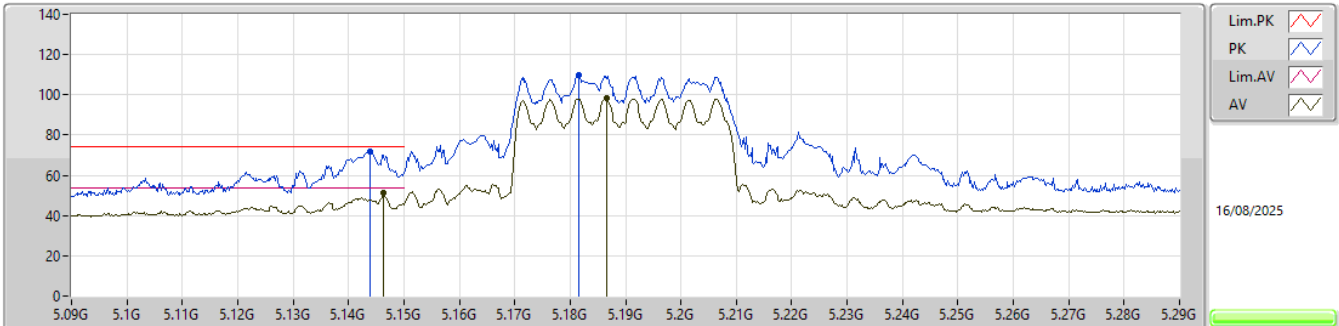


EUT_Y_4TX
SET 66
66
1.99

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1438G	72.01	74.00	-1.99	65.13	3	Horizontal	4	1.80	66	32.79	6.64	32.55			
AV	5.1464G	51.09	54.00	-2.91	44.20	3	Horizontal	4	1.80	66	32.79	6.64	32.54			
PK	5.1816G	109.83	Inf	-Inf	102.88	3	Horizontal	4	1.80	66	32.86	6.63	32.54			
AV	5.1866G	98.12	Inf	-Inf	91.16	3	Horizontal	4	1.80	66	32.87	6.63	32.54			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

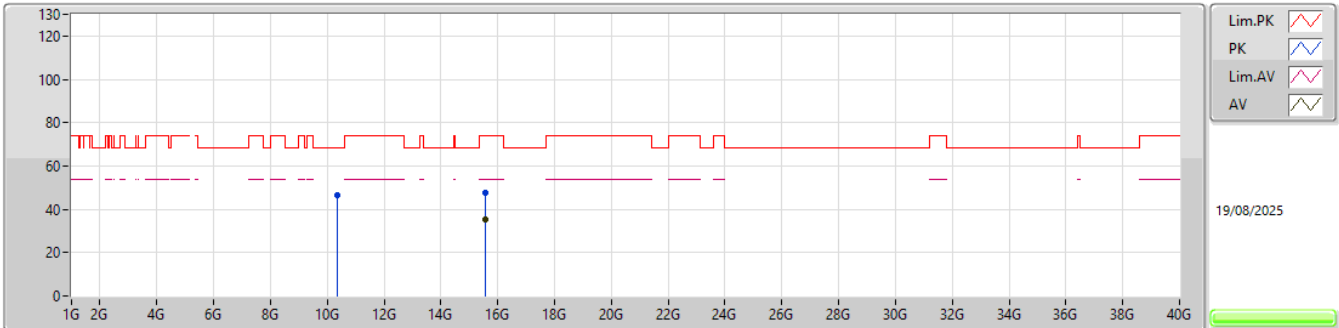


EUT_Y_4TX
Setting 66
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36842G	46.70	68.20	-21.50	63.15	3	Vertical	248	2.72	-	39.20	11.02	66.67			
PK	15.58203G	47.74	74.00	-26.26	59.65	3	Vertical	357	1.98	-	38.80	13.13	63.84			
AV	15.57279G	35.29	54.00	-18.71	47.21	3	Vertical	357	1.98	-	38.80	13.12	63.84			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

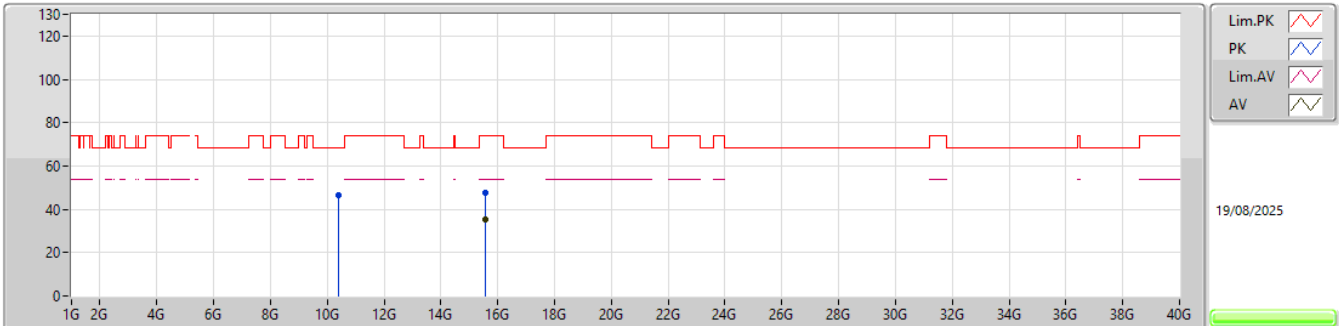


EUT_Y_4TX
Setting 66
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38363G	46.78	68.20	-21.42	63.23	3	Horizontal	26	2.49	-	39.20	11.03	66.68			
PK	15.57102G	47.71	74.00	-26.29	59.63	3	Horizontal	105	2.80	-	38.80	13.12	63.84			
AV	15.57411G	35.36	54.00	-18.64	47.28	3	Horizontal	105	2.80	-	38.80	13.12	63.84			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

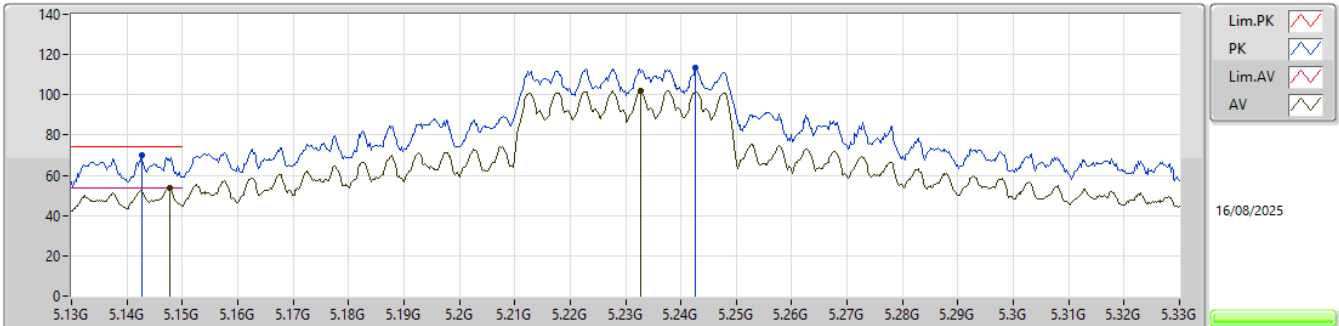


EUT_Y_4TX
SET 79
80\76\78\79
-0.89\3.38\1.20\0.28

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1426G	69.73	74.00	-4.27	62.85	3	Vertical	2	2.67	79	32.79	6.64	32.55			
AV	5.1478G	53.72	54.00	-0.28	46.82	3	Vertical	2	2.67	79	32.80	6.64	32.54			
PK	5.2426G	113.36	Inf	-Inf	106.33	3	Vertical	2	2.67	79	32.90	6.65	32.52			
AV	5.2328G	101.80	Inf	-Inf	94.77	3	Vertical	2	2.67	79	32.90	6.65	32.52			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

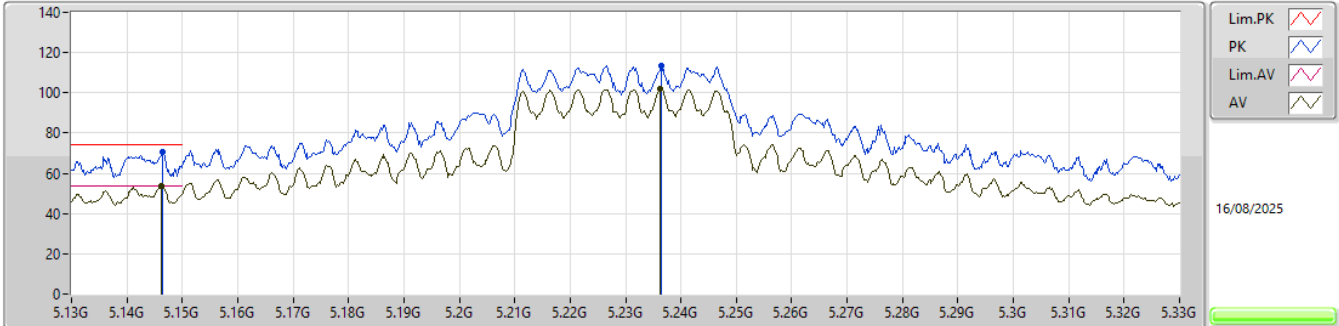


EUT_Y_4TX
SET 78
79\77\78
-0.36\1.16\0.27

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1464G	70.43	74.00	-3.57	63.54	3	Horizontal	360	1.80	78	32.79	6.64	32.54			
AV	5.1462G	53.73	54.00	-0.27	46.84	3	Horizontal	360	1.80	78	32.79	6.64	32.54			
PK	5.2364G	113.49	Inf	-Inf	106.46	3	Horizontal	360	1.80	78	32.90	6.65	32.52			
AV	5.2362G	101.72	Inf	-Inf	94.69	3	Horizontal	360	1.80	78	32.90	6.65	32.52			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

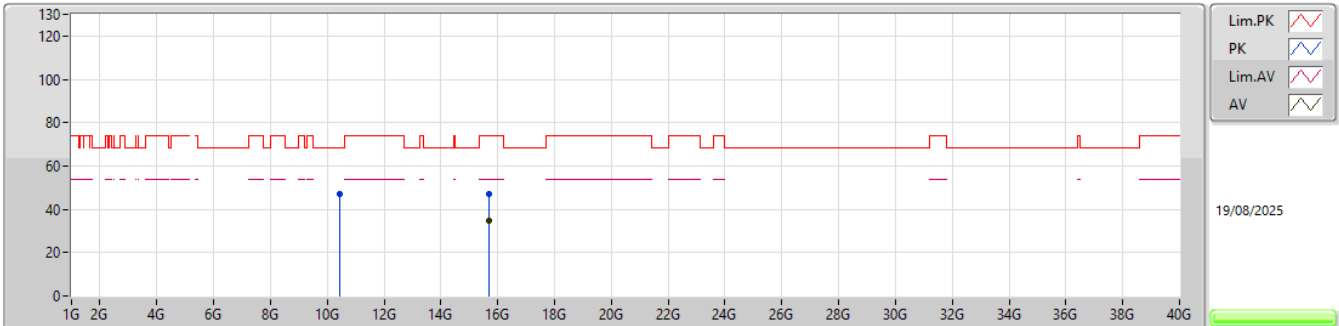


EUT_Y_4TX
Setting 78
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.45622G	47.08	68.20	-21.12	63.50	3	Vertical	205	3.00	-	39.21	11.08	66.71			
PK	15.6837G	47.00	74.00	-27.00	58.78	3	Vertical	5	2.63	-	38.90	13.20	63.88			
AV	15.69189G	34.82	54.00	-19.18	46.60	3	Vertical	5	2.63	-	38.90	13.20	63.88			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

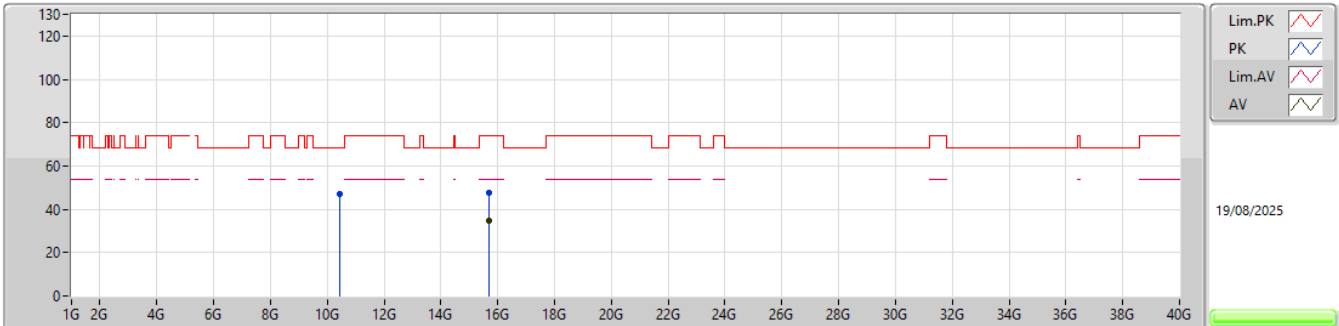


EUT_Y_4TX
Setting 78
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.45181G	46.86	68.20	-21.34	63.30	3	Horizontal	164	1.10	-	39.20	11.07	66.71			
PK	15.68541G	47.77	74.00	-26.23	59.55	3	Horizontal	295	3.00	-	38.90	13.20	63.88			
AV	15.6996G	34.79	54.00	-19.21	46.57	3	Horizontal	295	3.00	-	38.90	13.21	63.89			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

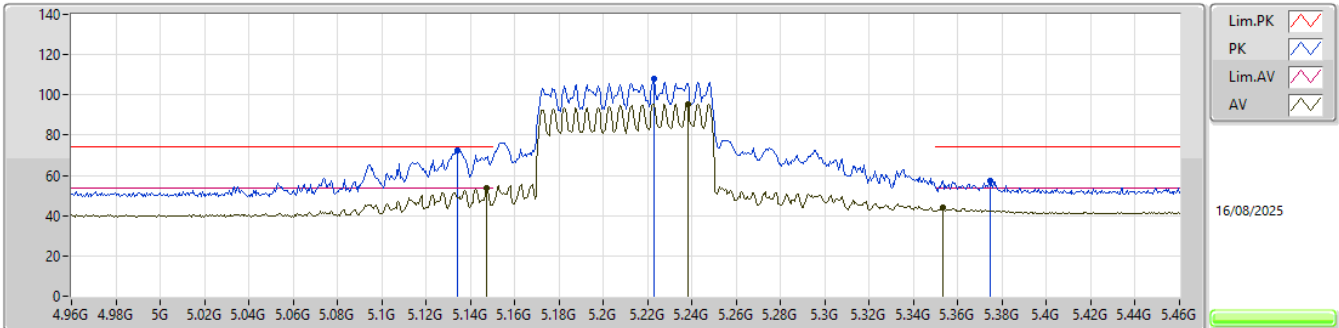


EUT_Y_4TX
SET 67
80\40\84\62\73\68\66\67
-15.19\12.24\19.68\3.41\6.61\0.78\1.70\0.15

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.134G	72.49	74.00	-1.51	65.63	3	Vertical	360	2.56	67	32.77	6.64	32.55
AV	5.1475G	53.85	54.00	-0.15	46.96	3	Vertical	360	2.56	67	32.79	6.64	32.54
PK	5.223G	107.99	Inf	-Inf	100.98	3	Vertical	360	2.56	67	32.90	6.64	32.53
AV	5.238G	95.63	Inf	-Inf	88.60	3	Vertical	360	2.56	67	32.90	6.65	32.52
PK	5.3745G	57.06	74.00	-16.94	49.63	3	Vertical	360	2.56	67	33.20	6.72	32.49
AV	5.353G	44.27	54.00	-9.73	36.95	3	Vertical	360	2.56	67	33.11	6.71	32.50

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

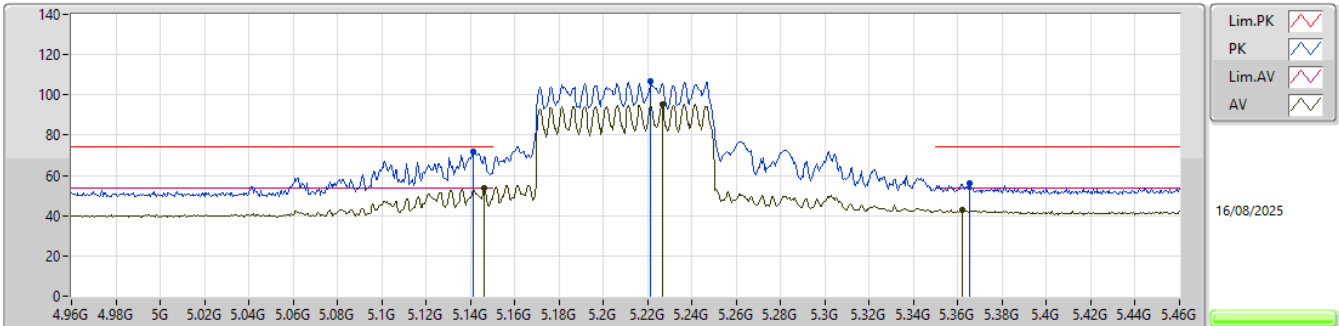


EUT_Y_4TX
SET 66
67\63\65\66
-0.93\1.71\0.82\0.37

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1415G	71.56	74.00	-2.44	64.69	3	Horizontal	0	1.80	66	32.78	6.64	32.55
AV	5.146G	53.63	54.00	-0.37	46.74	3	Horizontal	0	1.80	66	32.79	6.64	32.54
PK	5.2215G	107.05	Inf	-Inf	100.04	3	Horizontal	0	1.80	66	32.90	6.64	32.53
AV	5.2265G	95.41	Inf	-Inf	88.40	3	Horizontal	0	1.80	66	32.90	6.64	32.53
PK	5.3655G	55.86	74.00	-18.14	48.48	3	Horizontal	0	1.80	66	33.16	6.71	32.49
AV	5.362G	43.06	54.00	-10.94	35.69	3	Horizontal	0	1.80	66	33.15	6.71	32.49

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

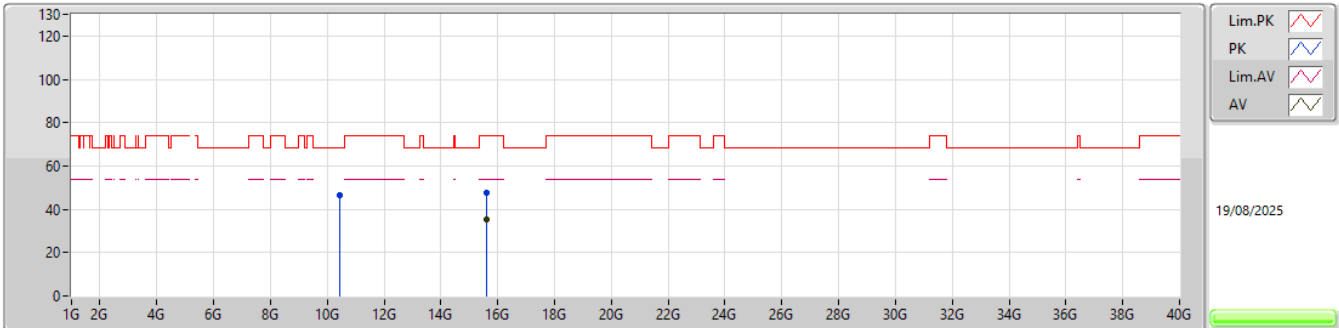


EUT_Y_4TX
Setting 66
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42522G	46.24	68.20	-21.96	62.68	3	Vertical	108	2.50	-	39.20	11.06	66.70			
PK	15.61518G	47.55	74.00	-26.45	59.42	3	Vertical	282	2.23	-	38.83	13.15	63.85			
AV	15.62259G	35.29	54.00	-18.71	47.14	3	Vertical	282	2.23	-	38.85	13.16	63.86			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

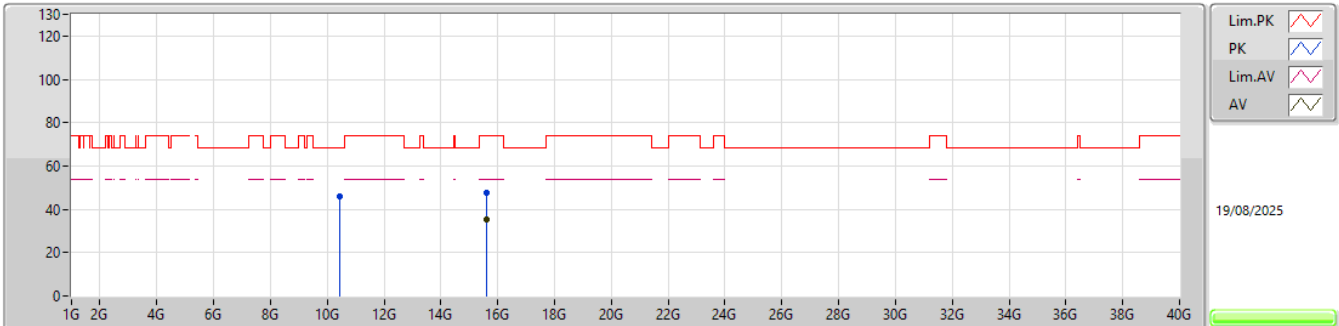


EUT_Y_4TX
Setting 66
06-E-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42087G	45.99	68.20	-22.21	62.44	3	Horizontal	112	2.45	-	39.20	11.05	66.70			
PK	15.62307G	47.81	74.00	-26.19	59.66	3	Horizontal	281	1.71	-	38.85	13.16	63.86			
AV	15.61971G	35.36	54.00	-18.64	47.23	3	Horizontal	281	1.71	-	38.84	13.15	63.86			

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5180MHz_TX

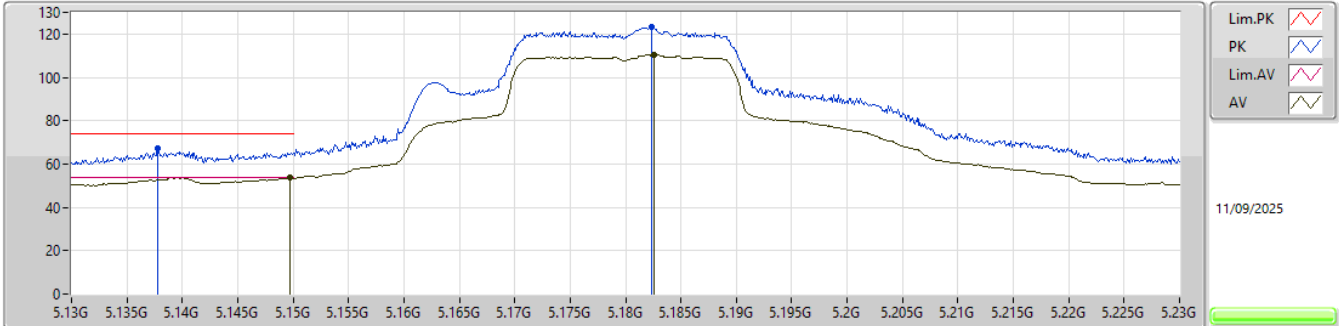


EUT_Y_4TX
Setting 70
03-C-B-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1378G	67.20	74.00	-6.80	60.77	3	Vertical	184	1.80	-	33.90	7.46	34.93			
AV	5.1497G	53.88	54.00	-0.12	47.42	3	Vertical	184	1.80	-	33.90	7.49	34.93			
PK	5.1824G	123.33	Inf	-Inf	116.65	3	Vertical	184	1.80	-	34.03	7.57	34.92			
AV	5.1826G	110.43	Inf	-Inf	103.75	3	Vertical	184	1.80	-	34.03	7.57	34.92			

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5180MHz_TX

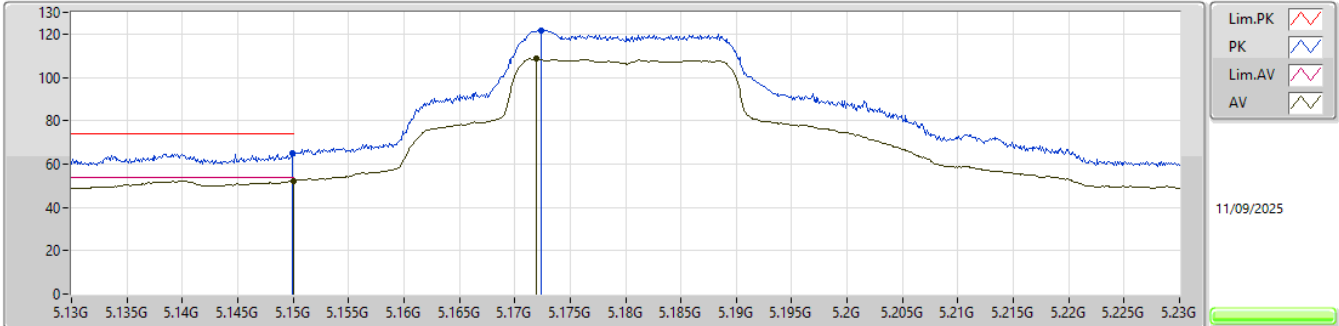


EUT_Y_4TX
Setting 70
03-C-B-5-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1499G	64.95	74.00	-9.05	58.49	3	Horizontal	179	1.57	-	33.90	7.49	34.93				
AV	5.15G	52.24	54.00	-1.76	45.78	3	Horizontal	179	1.57	-	33.90	7.49	34.93				
PK	5.1724G	121.63	Inf	-Inf	115.02	3	Horizontal	179	1.57	-	33.99	7.55	34.93				
AV	5.172G	108.87	Inf	-Inf	102.27	3	Horizontal	179	1.57	-	33.99	7.54	34.93				

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5180MHz_TX

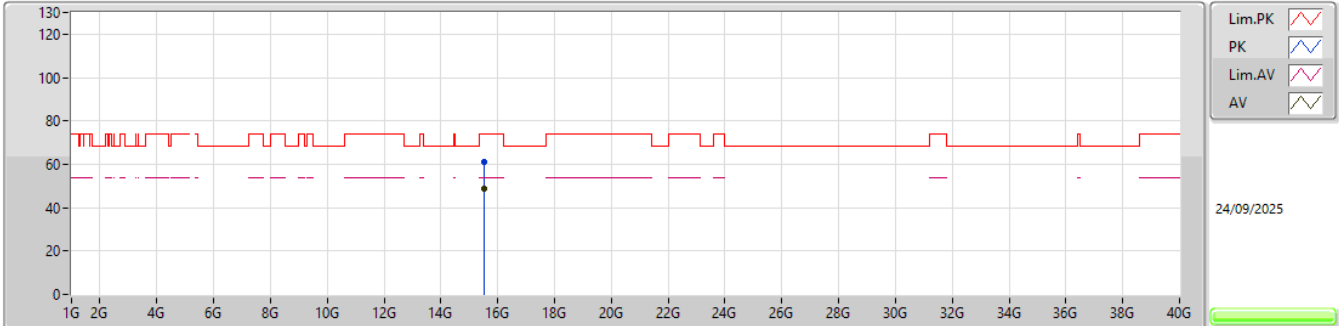


EUT_V_4TX
Setting 70
01-U-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.52563G	60.80	74.00	-13.20	41.32	3	Vertical	345	1.80	-	38.60	13.60	32.72			
AV	15.53487G	48.93	54.00	-5.07	29.46	3	Vertical	345	1.80	-	38.60	13.60	32.73			

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5180MHz_TX

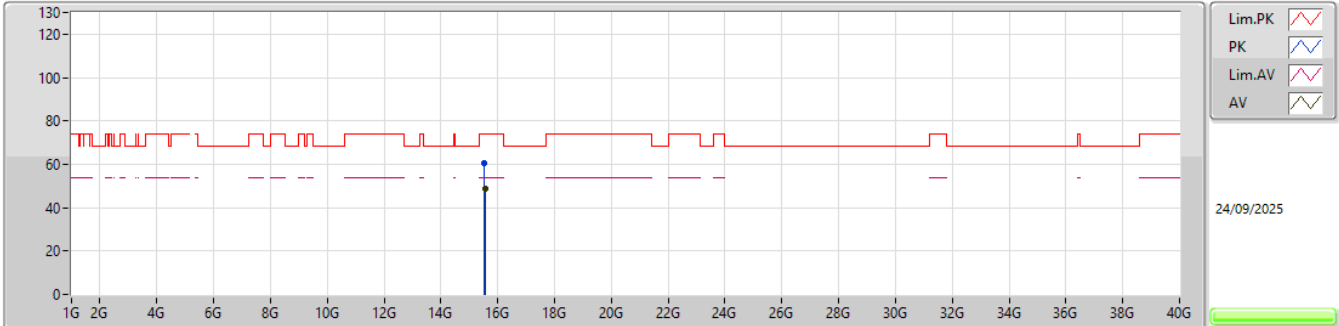


EUT_Y_4TX
Setting 70
01-U-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.53427G	60.59	74.00	-13.41	41.12	3	Horizontal	262	2.55	-	38.60	13.60	32.73			
AV	15.55386G	48.90	54.00	-5.10	29.44	3	Horizontal	262	2.55	-	38.58	13.61	32.73			

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5200MHz_TX

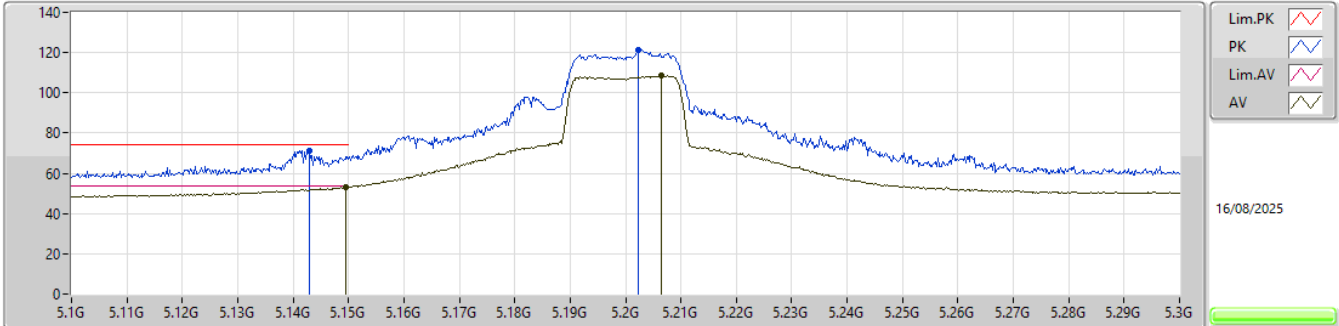


EUT Y_4TX
Setting 78
01-U-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.143G	71.19	74.00	-2.81	64.31	3	Vertical	2	1.80	-	32.79	6.64	32.55
AV	5.1494G	53.14	54.00	-0.86	46.24	3	Vertical	2	1.80	-	32.80	6.64	32.54
PK	5.2024G	121.27	Inf	-Inf	114.27	3	Vertical	2	1.80	-	32.90	6.63	32.53
AV	5.2064G	108.47	Inf	-Inf	101.47	3	Vertical	2	1.80	-	32.90	6.63	32.53

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5200MHz_TX

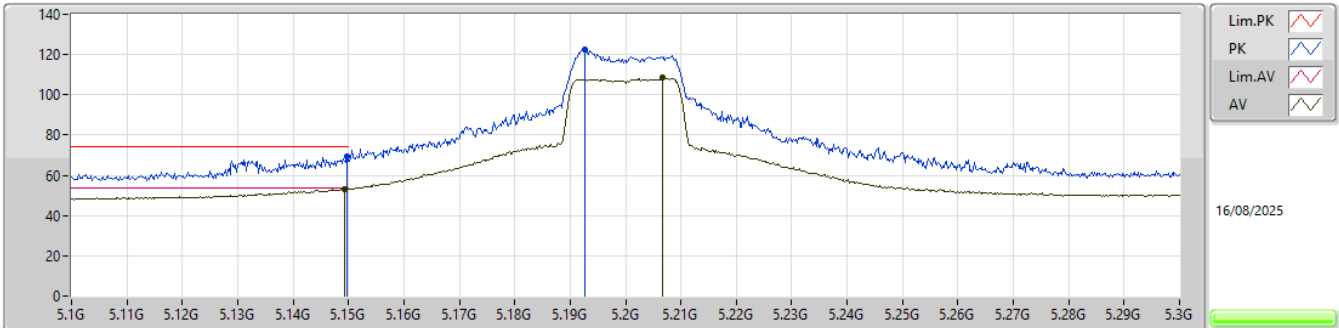


EUT_Y_4TX
Setting 78
01-U-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1498G	69.67	74.00	-4.33	62.77	3	Horizontal	4	1.80	-	32.80	6.64	32.54				
AV	5.1492G	53.29	54.00	-0.71	46.39	3	Horizontal	4	1.80	-	32.80	6.64	32.54				
PK	5.1926G	122.42	Inf	-Inf	115.43	3	Horizontal	4	1.80	-	32.89	6.63	32.53				
AV	5.2066G	108.56	Inf	-Inf	101.56	3	Horizontal	4	1.80	-	32.90	6.63	32.53				

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5200MHz_TX

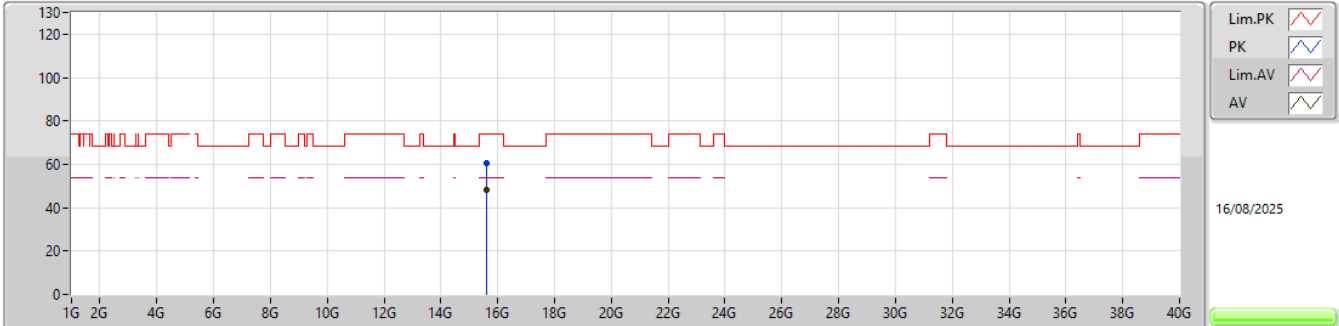


EUT_V_4TX
Setting 78
01-U-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.59088G	60.58	74.00	-13.42	41.26	3	Vertical	74	1.80	-	38.44	13.61	32.73			
AV	15.59562G	48.43	54.00	-5.57	29.14	3	Vertical	74	1.80	-	38.42	13.61	32.74			

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5200MHz_TX

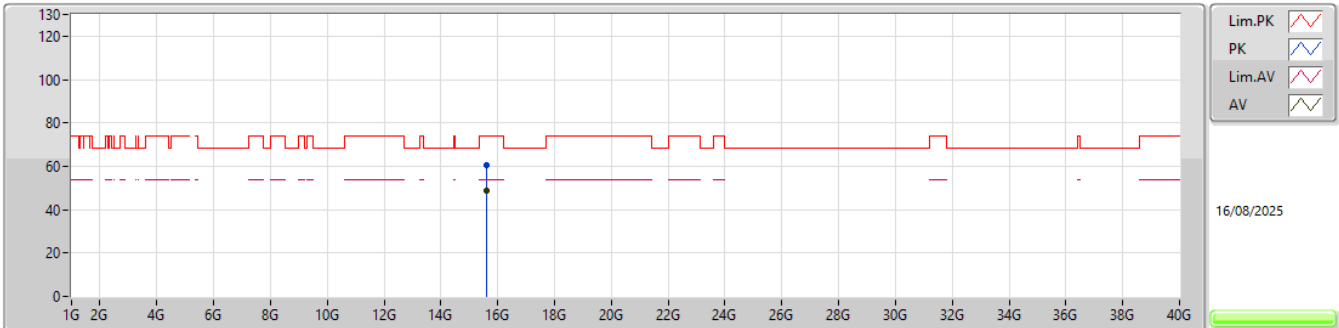


EUT_V_4TX
Setting 78
01-U-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.6006G	60.24	74.00	-13.76	40.97	3	Horizontal	278	1.80	-	38.40	13.61	32.74			
AV	15.61359G	48.59	54.00	-5.41	29.40	3	Horizontal	278	1.80	-	38.32	13.61	32.74			

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5240MHz_TX

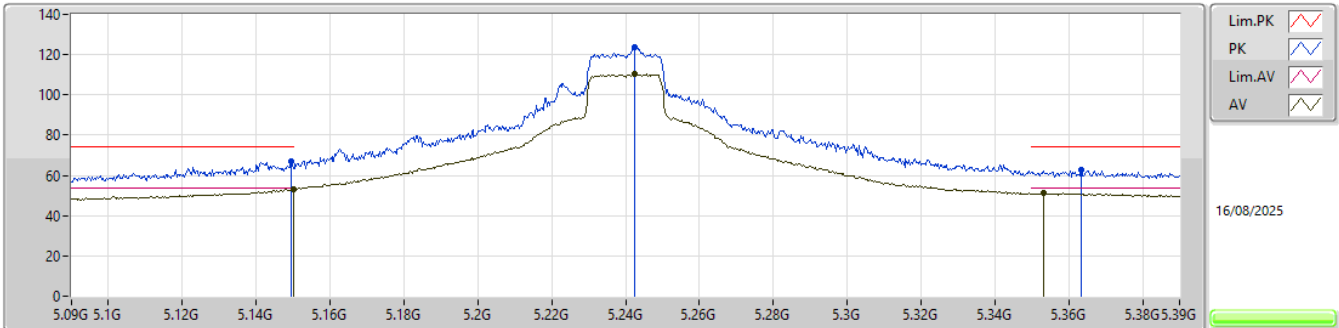


EUT_Y_4TX
Setting 84
01-U-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1494G	67.04	74.00	-6.96	60.14	3	Vertical	358	1.80	-	32.80	6.64	32.54
AV	5.15G	53.37	54.00	-0.63	46.47	3	Vertical	358	1.80	-	32.80	6.64	32.54
PK	5.2424G	123.89	Inf	-Inf	116.86	3	Vertical	358	1.80	-	32.90	6.65	32.52
AV	5.2424G	110.19	Inf	-Inf	103.16	3	Vertical	358	1.80	-	32.90	6.65	32.52
PK	5.3633G	62.62	74.00	-11.38	55.25	3	Vertical	358	1.80	-	33.15	6.71	32.49
AV	5.3531G	51.31	54.00	-2.69	43.99	3	Vertical	358	1.80	-	33.11	6.71	32.50

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5240MHz_TX

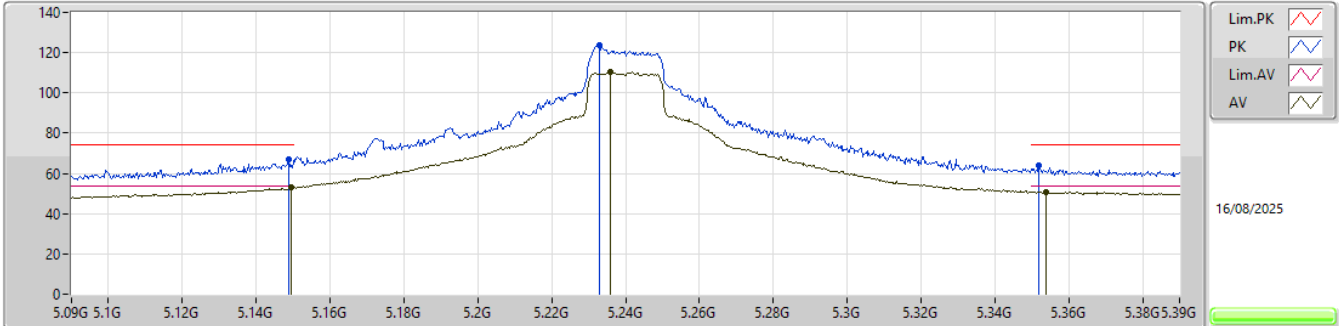


EUT_Y_4TX
Setting 84
01-U-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1488G	67.13	74.00	-6.87	60.23	3	Horizontal	1	1.80	-	32.80	6.64	32.54
AV	5.1494G	53.20	54.00	-0.80	46.30	3	Horizontal	1	1.80	-	32.80	6.64	32.54
PK	5.2328G	123.95	Inf	-Inf	116.92	3	Horizontal	1	1.80	-	32.90	6.65	32.52
AV	5.2358G	110.26	Inf	-Inf	103.23	3	Horizontal	1	1.80	-	32.90	6.65	32.52
PK	5.3519G	63.85	74.00	-10.15	56.53	3	Horizontal	1	1.80	-	33.11	6.71	32.50
AV	5.3537G	50.77	54.00	-3.23	43.45	3	Horizontal	1	1.80	-	33.11	6.71	32.50

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5240MHz_TX

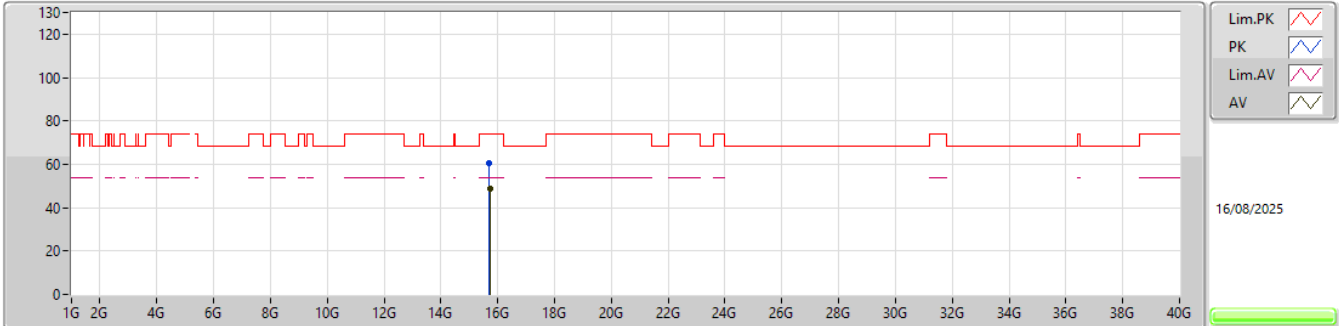


EUT_Y_4TX
Setting 84
01-U-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.71499G	60.65	74.00	-13.35	41.52	3	Vertical	298	2.76	-	38.26	13.62	32.75			
AV	15.7191G	48.91	54.00	-5.09	29.77	3	Vertical	298	2.76	-	38.28	13.62	32.76			

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

5240MHz_TX

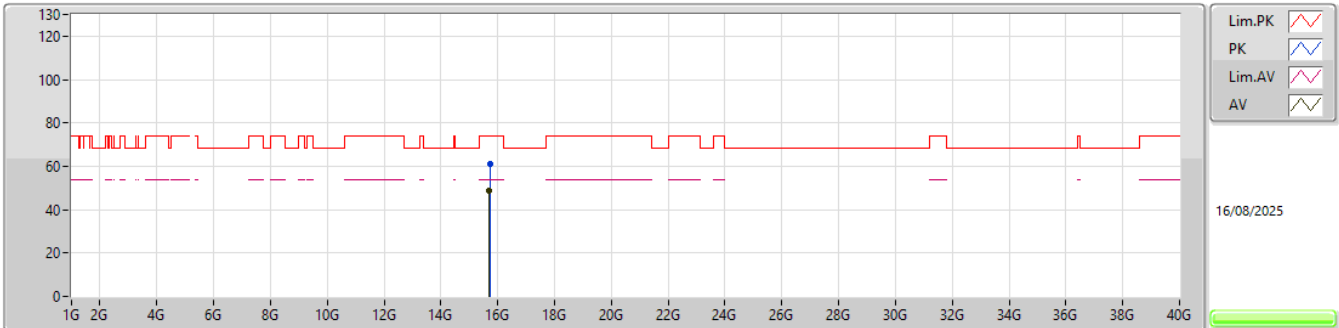


EUT_V_4TX
Setting 84
01-U-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.72072G	60.98	74.00	-13.02	41.84	3	Horizontal	5	1.80	-	38.28	13.62	32.76			
AV	15.70824G	48.61	54.00	-5.39	29.51	3	Horizontal	5	1.80	-	38.23	13.62	32.75			

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5190MHz_TX

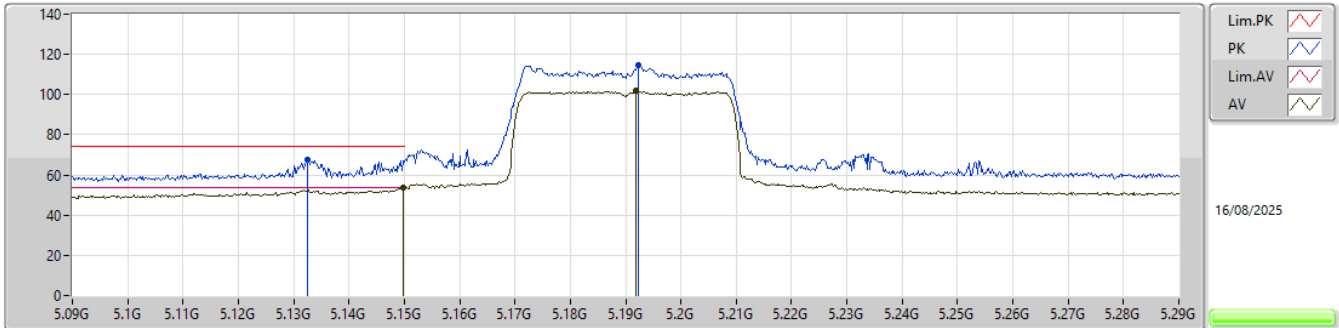


EUT Y_4TX
Setting 58
01-U-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1326G	67.52	74.00	-6.48	60.66	3	Vertical	2	1.80	-	32.77	6.64	32.55				
AV	5.1498G	53.42	54.00	-0.58	46.52	3	Vertical	2	1.80	-	32.80	6.64	32.54				
PK	5.1924G	114.39	Inf	-Inf	107.41	3	Vertical	2	1.80	-	32.88	6.63	32.53				
AV	5.1918G	101.73	Inf	-Inf	94.75	3	Vertical	2	1.80	-	32.88	6.63	32.53				

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5190MHz_TX

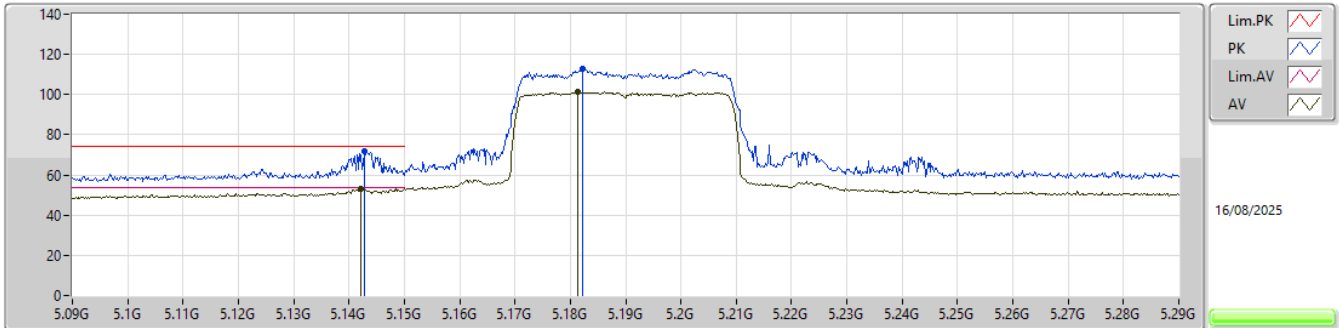


EUT_Y_4TX
Setting 58
01-U-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1428G	71.74	74.00	-2.26	64.86	3	Horizontal	2	1.80	-	32.79	6.64	32.55				
AV	5.1422G	52.98	54.00	-1.02	46.11	3	Horizontal	2	1.80	-	32.78	6.64	32.55				
PK	5.1822G	112.90	Inf	-Inf	105.95	3	Horizontal	2	1.80	-	32.86	6.63	32.54				
AV	5.1814G	101.39	Inf	-Inf	94.44	3	Horizontal	2	1.80	-	32.86	6.63	32.54				

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5190MHz_TX

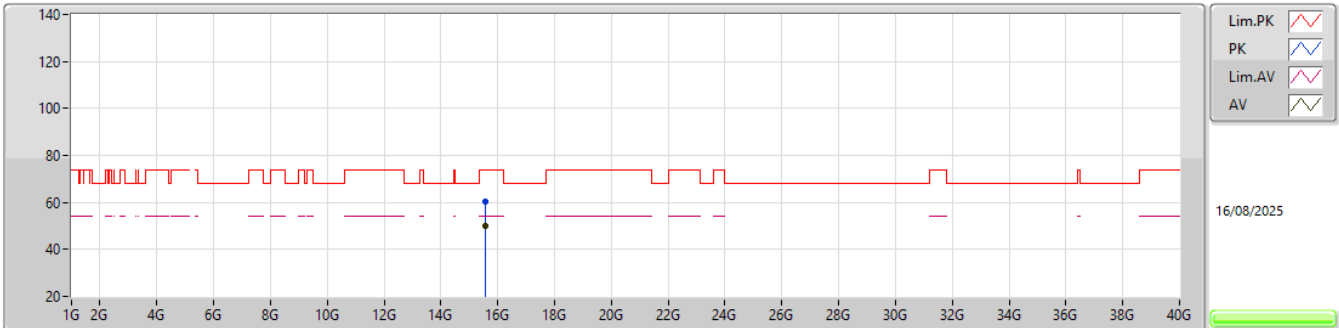


EUT_V_4TX
Setting 63
01-U-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	15.57582G	60.32	74.00	-13.68	40.94	3	Vertical	140	1.77	-	38.50	13.61	32.73			
AV	15.58029G	49.82	54.00	-4.18	30.46	3	Vertical	140	1.77	-	38.48	13.61	32.73			

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5190MHz_TX

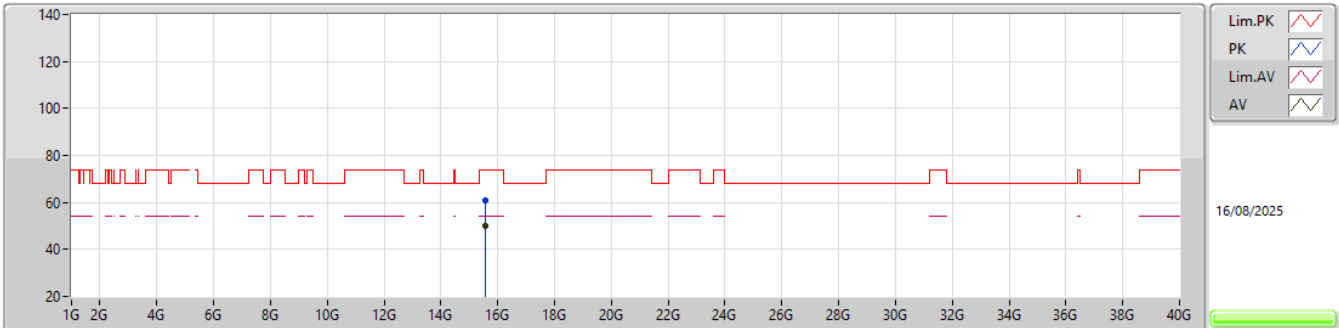


EUT_V_4TX
Setting 63
01-U-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	15.56886G	60.87	74.00	-13.13	41.47	3	Horizontal	329	1.80	-	38.52	13.61	32.73			
AV	15.57177G	50.01	54.00	-3.99	30.62	3	Horizontal	329	1.80	-	38.51	13.61	32.73			

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5230MHz_TX

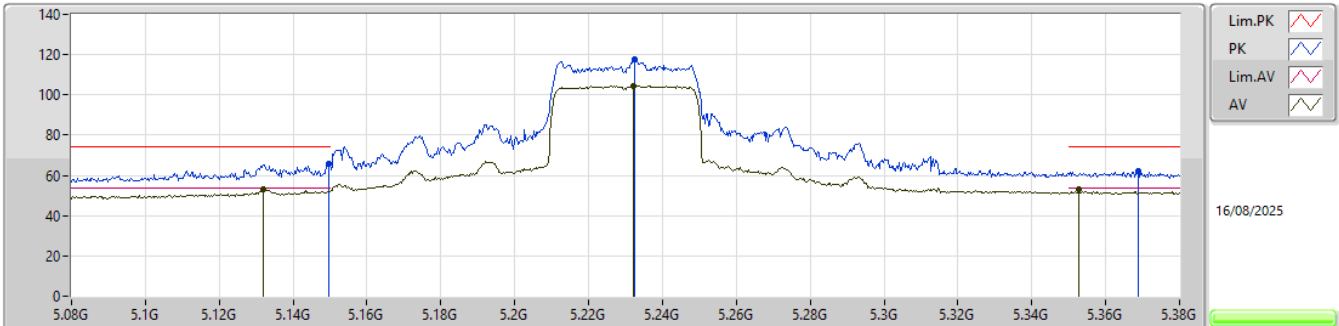


EUT_Y_4TX
Setting 67
01-U-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1496G	65.88	74.00	-8.12	58.98	3	Vertical	2	1.80	-	32.80	6.64	32.54
AV	5.1319G	53.16	54.00	-0.84	46.31	3	Vertical	2	1.80	-	32.76	6.64	32.55
PK	5.2324G	117.55	Inf	-Inf	110.52	3	Vertical	2	1.80	-	32.90	6.65	32.52
AV	5.2321G	104.58	Inf	-Inf	97.55	3	Vertical	2	1.80	-	32.90	6.65	32.52
PK	5.3689G	62.14	74.00	-11.86	54.74	3	Vertical	2	1.80	-	33.18	6.71	32.49
AV	5.3527G	52.84	54.00	-1.16	45.52	3	Vertical	2	1.80	-	33.11	6.71	32.50

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5230MHz_TX

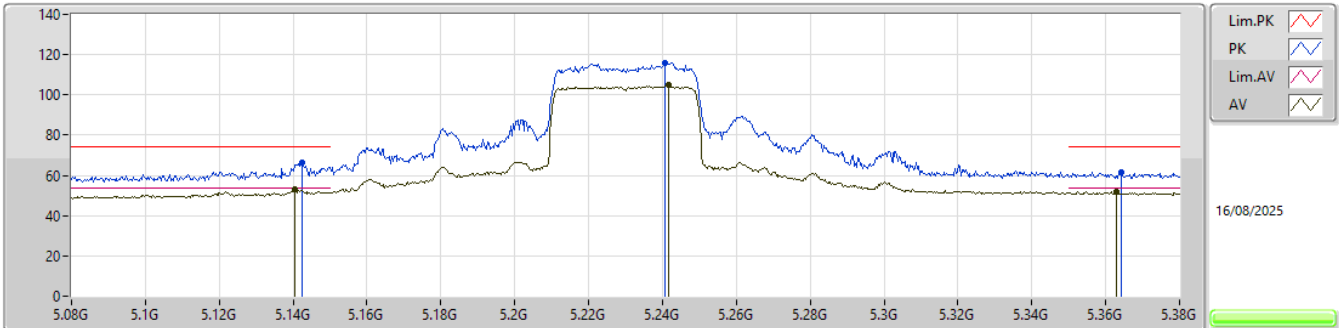


EUT_Y_4TX
Setting 67
01-U-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	66.31	74.00	-7.69	59.44	3	Horizontal	4	1.33	-	32.78	6.64	32.55
AV	5.1403G	52.82	54.00	-1.18	45.95	3	Horizontal	4	1.33	-	32.78	6.64	32.55
PK	5.2408G	115.90	Inf	-Inf	108.87	3	Horizontal	4	1.33	-	32.90	6.65	32.52
AV	5.2417G	104.83	Inf	-Inf	97.80	3	Horizontal	4	1.33	-	32.90	6.65	32.52
PK	5.3641G	61.76	74.00	-12.24	54.38	3	Horizontal	4	1.33	-	33.16	6.71	32.49
AV	5.3629G	51.85	54.00	-2.15	44.48	3	Horizontal	4	1.33	-	33.15	6.71	32.49

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5230MHz_TX

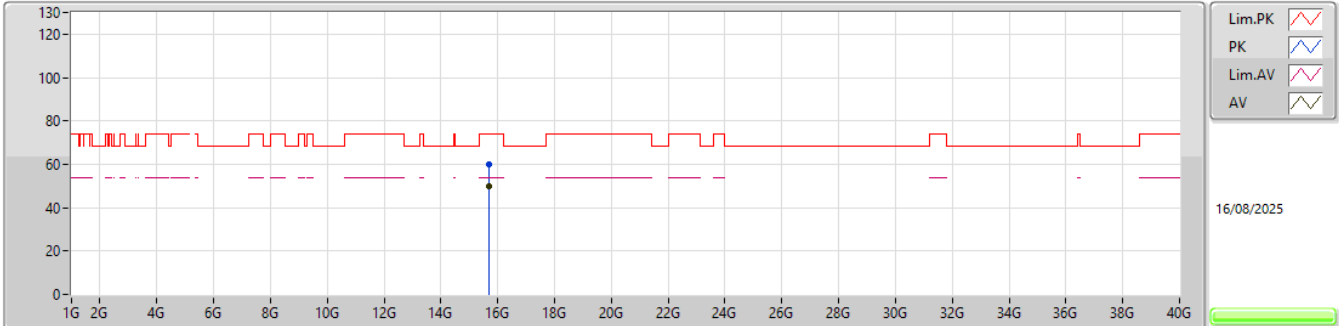


EUT_Y_4TX
Setting 67
01-U-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.68712G	59.83	74.00	-14.17	40.79	3	Vertical	161	1.79	-	38.17	13.62	32.75			
AV	15.68004G	49.71	54.00	-4.29	30.68	3	Vertical	161	1.79	-	38.16	13.62	32.75			

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5230MHz_TX

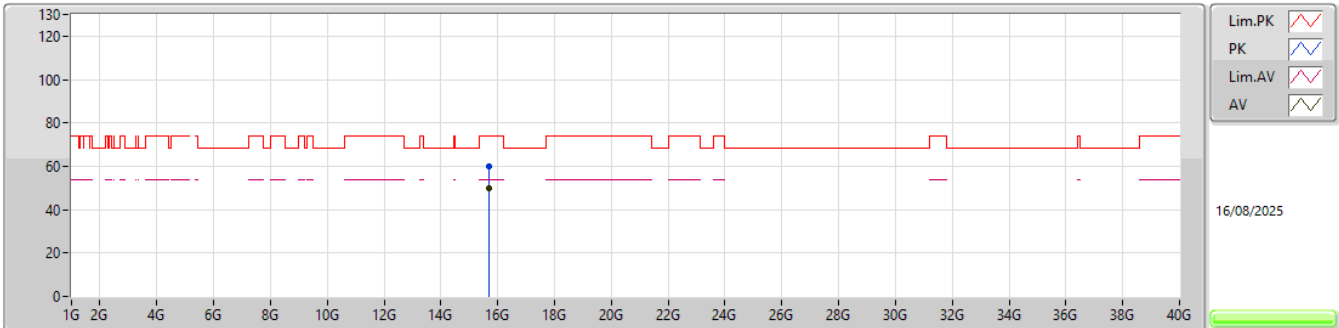


EUT_V_4TX
Setting 67
01-U-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	15.69612G	59.96	74.00	-14.04	40.90	3	Horizontal	356	2.14	-	38.19	13.62	32.75			
AV	15.6786G	49.69	54.00	-4.31	30.66	3	Horizontal	356	2.14	-	38.16	13.62	32.75			

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5210MHz_TX

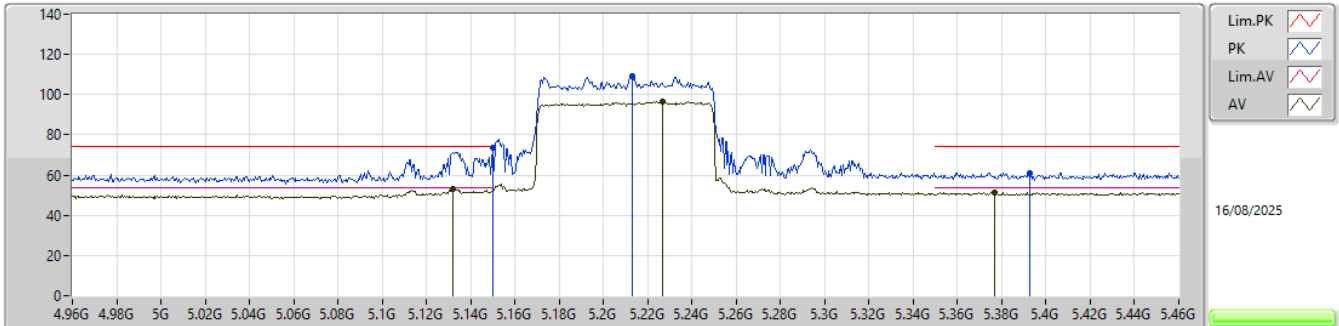


EUT Y_4TX
Setting 49
01-U-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.15G	73.37	74.00	-0.63	66.47	3	Vertical	360	1.80	-	32.80	6.64	32.54			
AV	5.132G	53.05	54.00	-0.95	46.20	3	Vertical	360	1.80	-	32.76	6.64	32.55			
PK	5.213G	108.93	Inf	-Inf	101.92	3	Vertical	360	1.80	-	32.90	6.64	32.53			
AV	5.2265G	96.85	Inf	-Inf	89.84	3	Vertical	360	1.80	-	32.90	6.64	32.53			
PK	5.3925G	61.22	74.00	-12.78	53.71	3	Vertical	360	1.80	-	33.27	6.73	32.49			
AV	5.3765G	51.44	54.00	-2.56	44.00	3	Vertical	360	1.80	-	33.21	6.72	32.49			

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5210MHz_TX

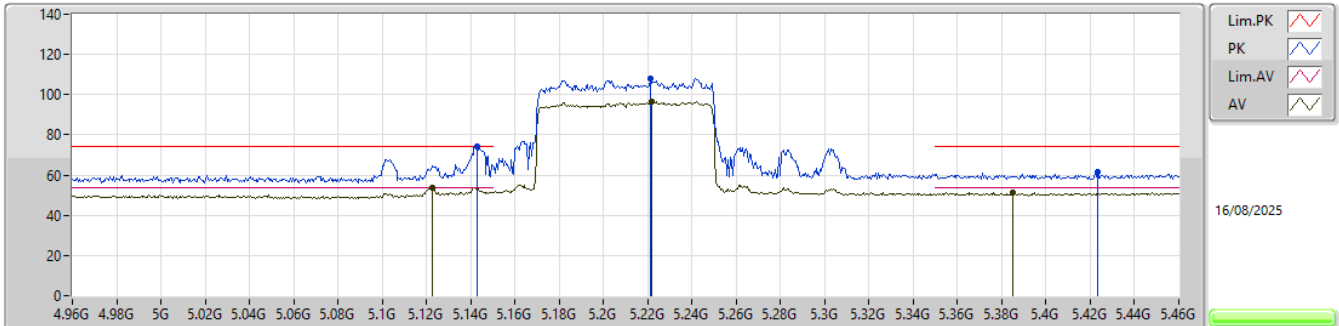


EUT_Y_4TX
Setting 49
01-U-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.143G	73.93	74.00	-0.07	67.05	3	Horizontal	0	1.80	-	32.79	6.64	32.55			
AV	5.1225G	53.85	54.00	-0.15	47.01	3	Horizontal	0	1.80	-	32.74	6.65	32.55			
PK	5.2215G	108.14	Inf	-Inf	101.13	3	Horizontal	0	1.80	-	32.90	6.64	32.53			
AV	5.222G	96.77	Inf	-Inf	89.76	3	Horizontal	0	1.80	-	32.90	6.64	32.53			
PK	5.4235G	61.32	74.00	-12.68	53.64	3	Horizontal	0	1.80	-	33.39	6.77	32.48			
AV	5.385G	51.10	54.00	-2.90	43.63	3	Horizontal	0	1.80	-	33.24	6.72	32.49			

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5210MHz_TX

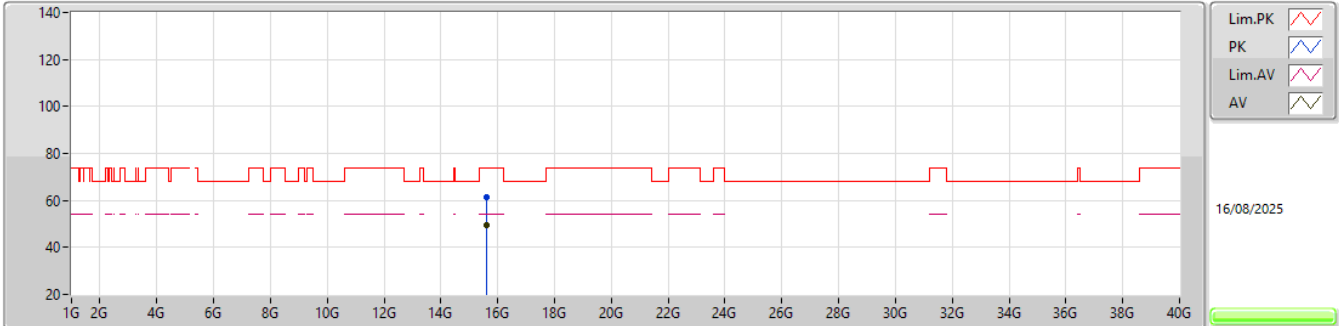


EUT_V_4TX
Setting 56
01-U-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.6216G	61.39	74.00	-12.61	42.25	3	Vertical	39	1.80	-	38.27	13.61	32.74			
AV	15.61503G	49.73	54.00	-4.27	30.55	3	Vertical	39	1.80	-	38.31	13.61	32.74			

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5210MHz_TX

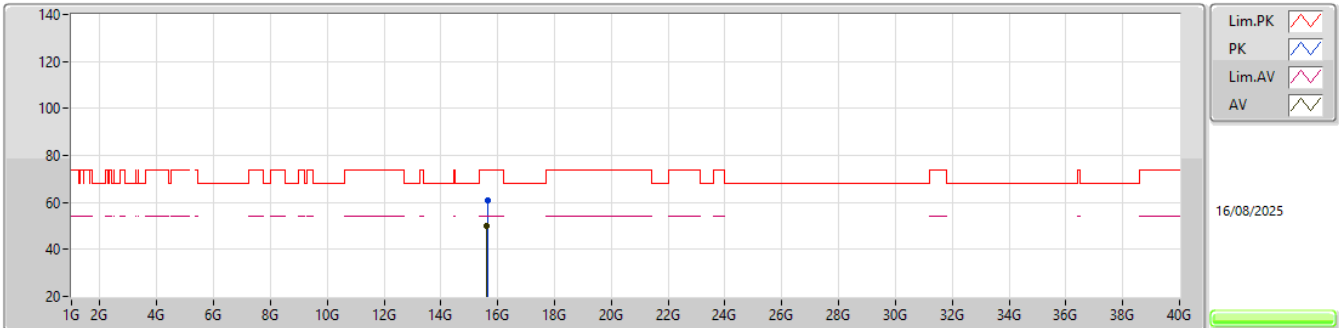

EUT_V_4TX
Setting 56
01-U-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.6369G	61.01	74.00	-12.99	41.96	3	Horizontal	214	1.74	-	38.18	13.61	32.74			
AV	15.6189G	49.98	54.00	-4.02	30.82	3	Horizontal	214	1.74	-	38.29	13.61	32.74			




Test Mode: Mode 2

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1.(6Mbps)_1TX	Pass	AV	5.15G	53.95	54.00	-0.05	3	Horizontal	353	1.76	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

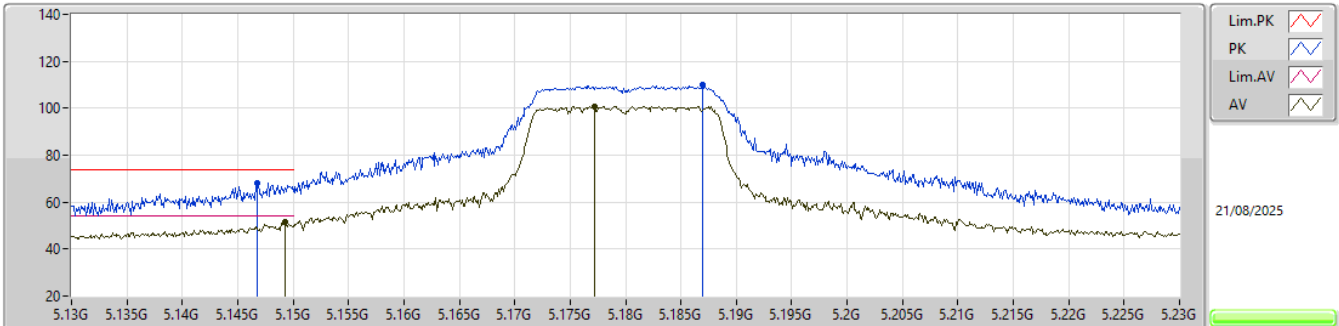


EUT_Y_1TX
Setting 75
03-C-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1468G	68.35	74.00	-5.65	61.90	3	Vertical	30	2.03	-	33.90	7.48	34.93			
AV	5.1493G	51.33	54.00	-2.67	44.87	3	Vertical	30	2.03	-	33.90	7.49	34.93			
PK	5.187G	109.88	Inf	-Inf	103.17	3	Vertical	30	2.03	-	34.05	7.58	34.92			
AV	5.1772G	100.82	Inf	-Inf	94.17	3	Vertical	30	2.03	-	34.01	7.56	34.92			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

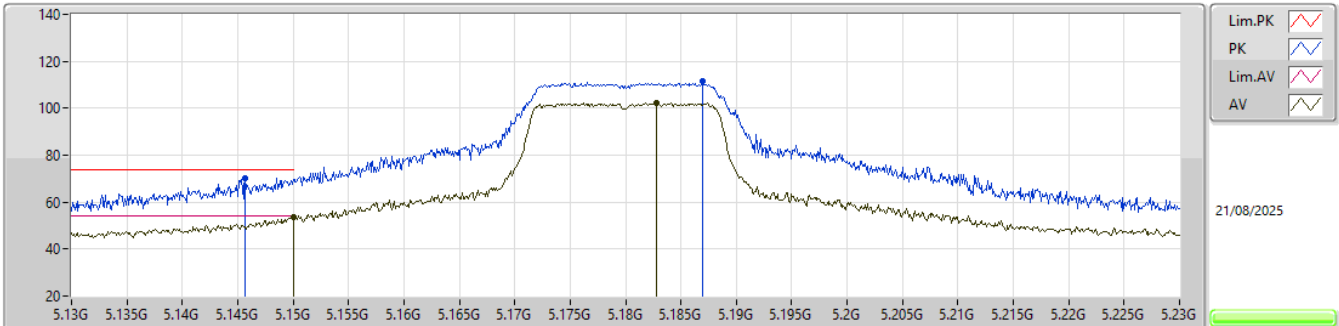


EUT_Y_1TX
Setting 75
03-C-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1457G	70.21	74.00	-3.79	63.76	3	Horizontal	355	1.98	-	33.90	7.48	34.93			
AV	5.15G	53.80	54.00	-0.20	47.34	3	Horizontal	355	1.98	-	33.90	7.49	34.93			
PK	5.187G	111.42	Inf	-Inf	104.71	3	Horizontal	355	1.98	-	34.05	7.58	34.92			
AV	5.1828G	102.46	Inf	-Inf	95.78	3	Horizontal	355	1.98	-	34.03	7.57	34.92			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

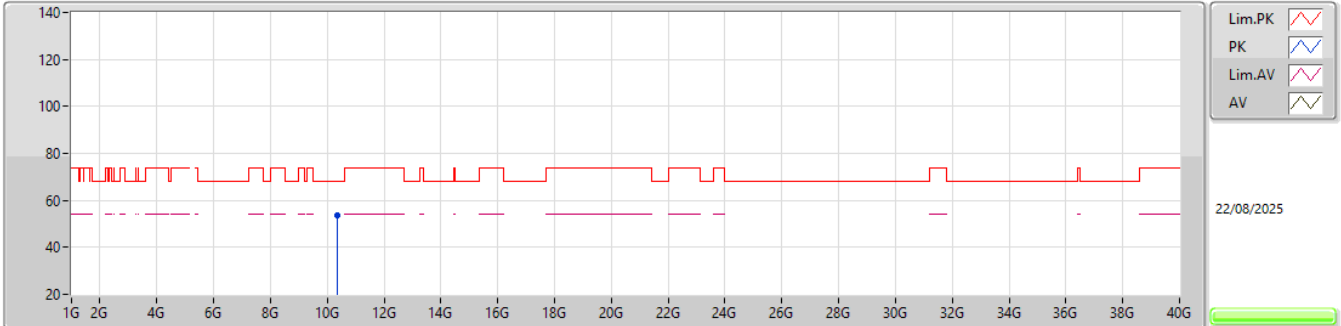


EUT_Y_1TX
Setting 75
03-C-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.35661G	53.82	68.20	-14.38	50.06	3	Vertical	34	1.95	-	38.07	11.16	45.47				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

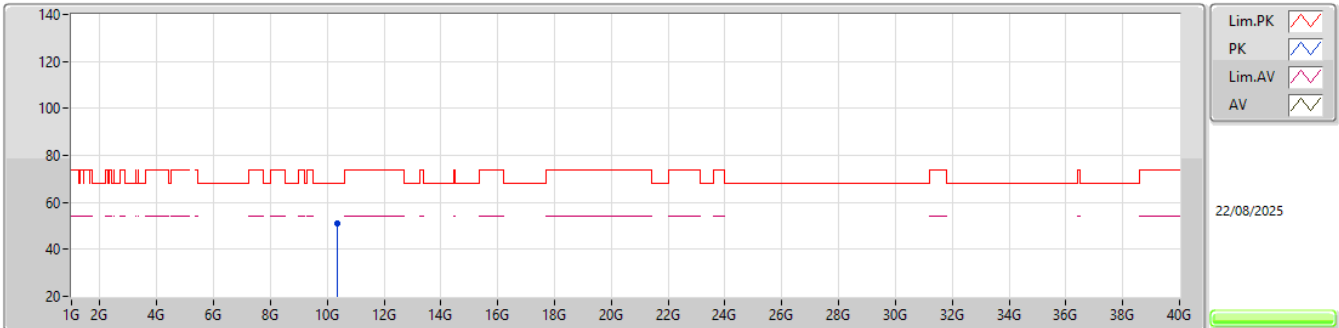


EUT_Y_1TX
Setting 75
03-C-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35664G	51.08	68.20	-17.12	47.32	3	Horizontal	6	2.57	-	38.07	11.16	45.47			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

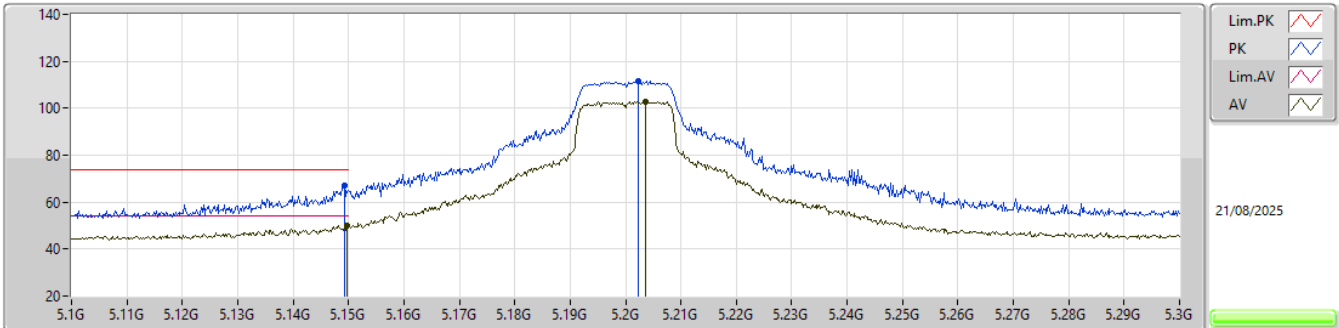


EUT Y_1TX
Setting 86
03-C-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1492G	66.93	74.00	-7.07	60.47	3	Vertical	360	2.13	-	33.90	7.49	34.93			
AV	5.1498G	50.08	54.00	-3.92	43.62	3	Vertical	360	2.13	-	33.90	7.49	34.93			
PK	5.2022G	111.50	Inf	-Inf	104.71	3	Vertical	360	2.13	-	34.10	7.61	34.92			
AV	5.2036G	102.73	Inf	-Inf	95.94	3	Vertical	360	2.13	-	34.10	7.61	34.92			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

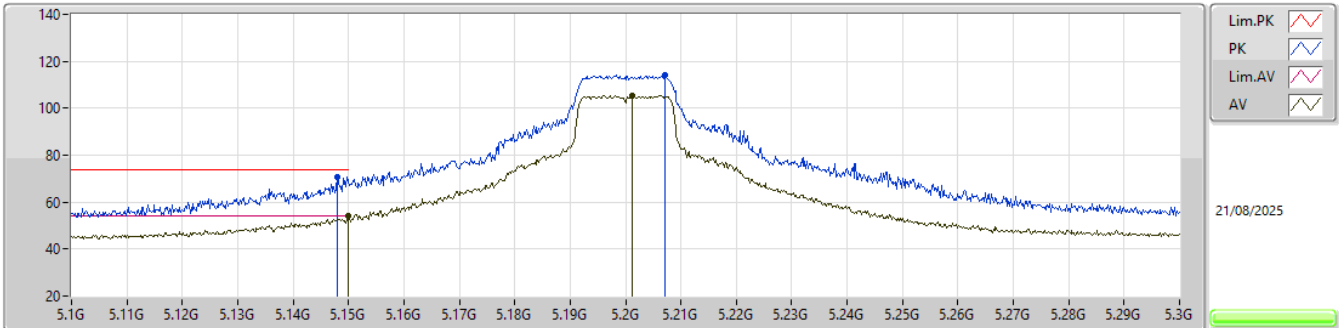


EUT Y_1TX
Setting 86
03-C-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	70.84	74.00	-3.16	64.38	3	Horizontal	353	1.76	-	33.90	7.49	34.93			
AV	5.15G	53.95	54.00	-0.05	47.49	3	Horizontal	353	1.76	-	33.90	7.49	34.93			
PK	5.2072G	114.39	Inf	-Inf	107.59	3	Horizontal	353	1.76	-	34.10	7.62	34.92			
AV	5.2012G	105.29	Inf	-Inf	98.50	3	Horizontal	353	1.76	-	34.10	7.61	34.92			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

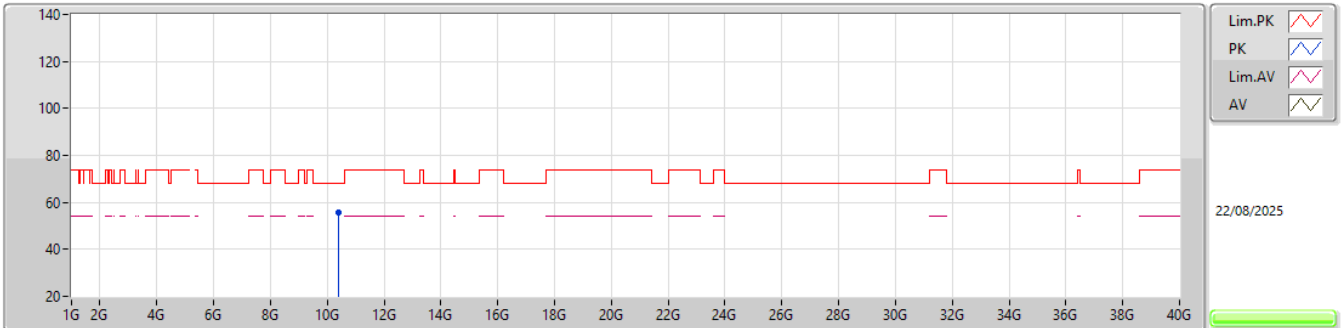


EUT_Y_1TX
Setting 86
03-C-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39649G	55.59	68.20	-12.61	51.99	3	Vertical	327	1.80	-	37.91	11.18	45.49			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

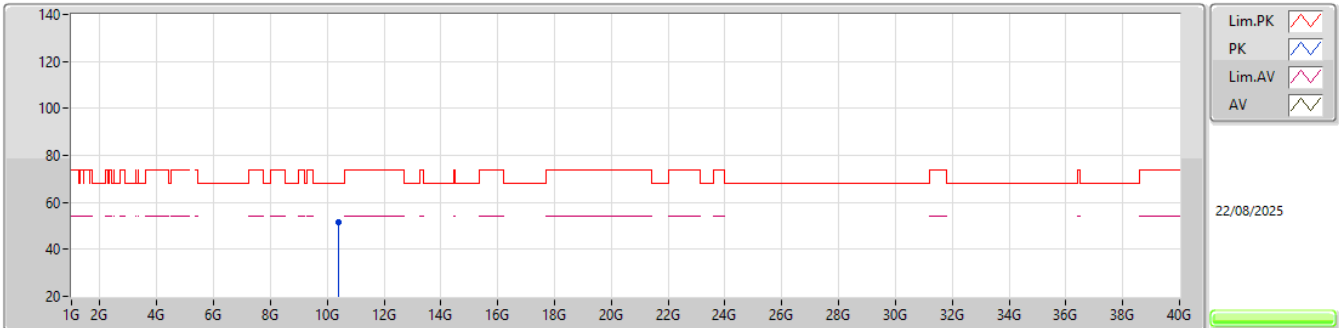


EUT_Y_1TX
Setting 86
03-C-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.39655G	51.79	68.20	-16.41	48.19	3	Horizontal	3	1.80	-	37.91	11.18	45.49				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

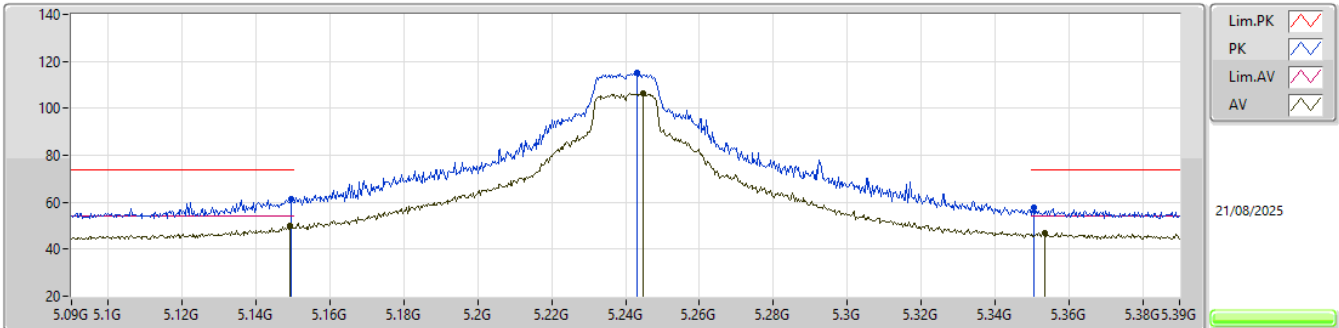


EUT_Y_1TX
Setting 94
03-C-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1494G	61.41	74.00	-12.59	54.95	3	Vertical	31	1.94	-	33.90	7.49	34.93			
AV	5.1491G	50.05	54.00	-3.95	43.59	3	Vertical	31	1.94	-	33.90	7.49	34.93			
PK	5.243G	114.97	Inf	-Inf	108.12	3	Vertical	31	1.94	-	34.10	7.66	34.91			
AV	5.2448G	106.52	Inf	-Inf	99.66	3	Vertical	31	1.94	-	34.10	7.67	34.91			
PK	5.3507G	57.68	74.00	-16.32	50.27	3	Vertical	31	1.94	-	34.50	7.80	34.89			
AV	5.3534G	46.82	54.00	-7.18	39.40	3	Vertical	31	1.94	-	34.51	7.80	34.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

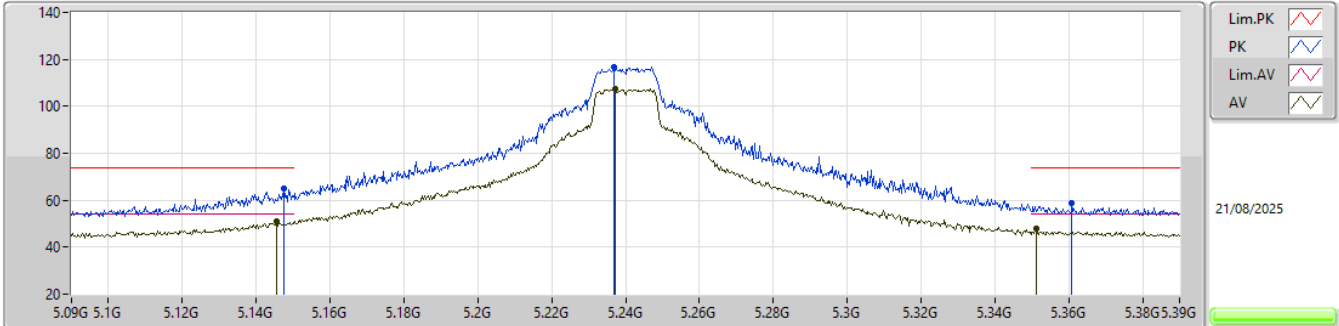


EUT_Y_1TX
Setting 94
03-C-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1476G	64.82	74.00	-9.18	58.36	3	Horizontal	354	1.98	-	33.90	7.49	34.93			
AV	5.1455G	51.11	54.00	-2.89	44.66	3	Horizontal	354	1.98	-	33.90	7.48	34.93			
PK	5.237G	116.98	Inf	-Inf	110.13	3	Horizontal	354	1.98	-	34.10	7.66	34.91			
AV	5.2373G	107.47	Inf	-Inf	100.62	3	Horizontal	354	1.98	-	34.10	7.66	34.91			
PK	5.3609G	58.97	74.00	-15.03	51.51	3	Horizontal	354	1.98	-	34.54	7.81	34.89			
AV	5.3513G	47.78	54.00	-6.22	40.36	3	Horizontal	354	1.98	-	34.51	7.80	34.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

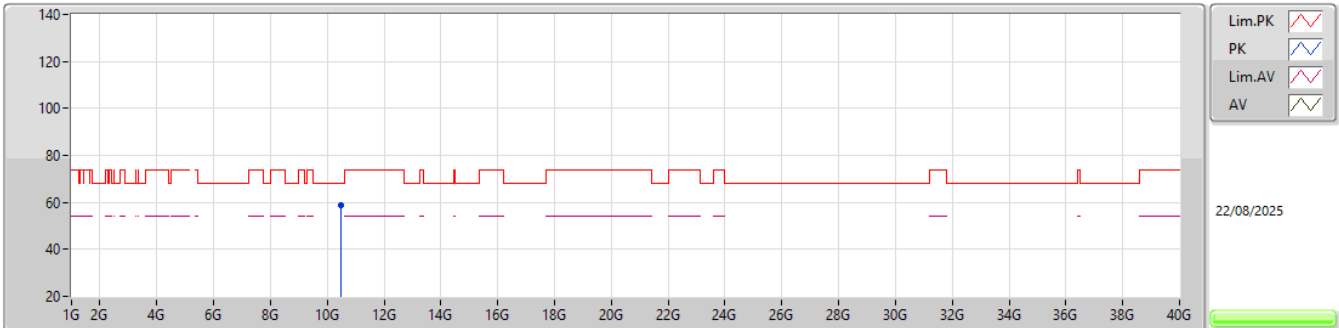


EUT_Y_1TX
Setting 94
03-C-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47655G	58.76	68.20	-9.44	55.07	3	Vertical	6	1.96	-	38.01	11.21	45.53			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

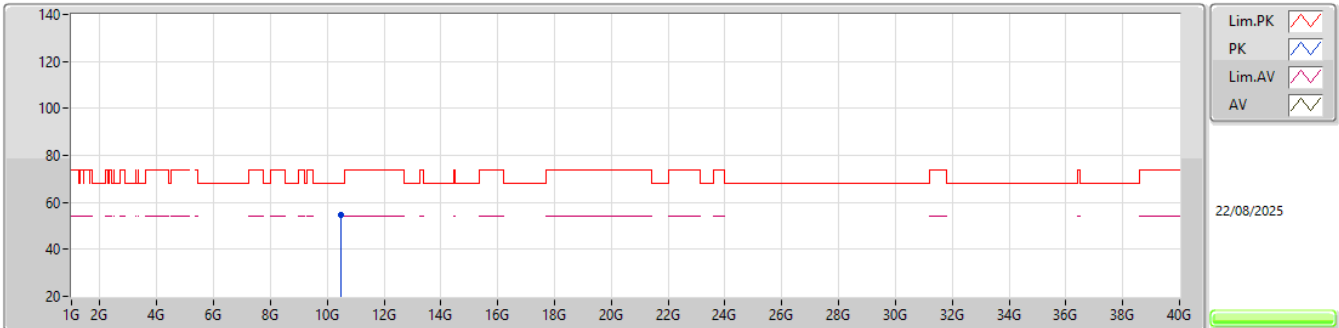


EUT_Y_1TX
Setting 94
03-C-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47652G	54.67	68.20	-13.53	50.98	3	Horizontal	344	1.74	-	38.01	11.21	45.53			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5180MHz_TX

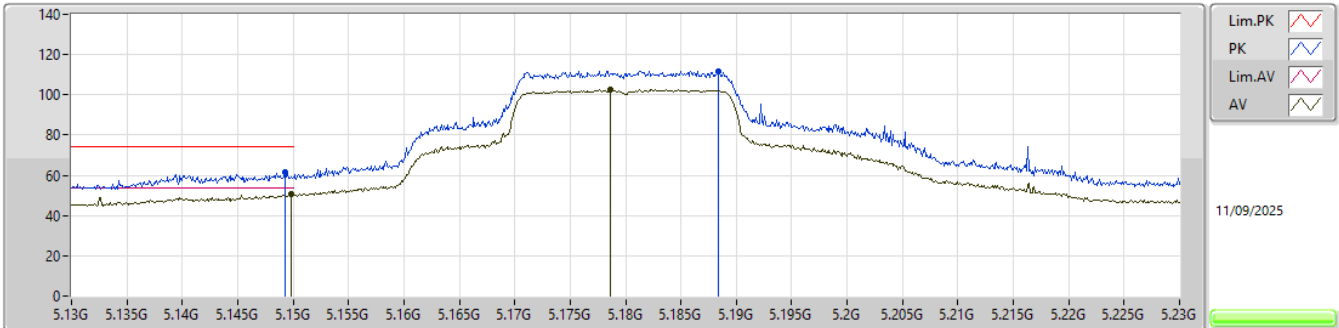


EUT_Y_1TX
SET 80
69\101\65\83\74\78\80\81\80
8.05\ -14.97\8.55\ -2.75\7.13\5.26\3.66\ -1.96\3.52

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1493G	61.83	74.00	-12.17	55.37	3	Vertical	208	1.80	80	33.90	7.49	34.93			
AV	5.1498G	50.48	54.00	-3.52	44.02	3	Vertical	208	1.80	80	33.90	7.49	34.93			
PK	5.1884G	111.89	Inf	-Inf	105.18	3	Vertical	208	1.80	80	34.05	7.58	34.92			
AV	5.1786G	102.57	Inf	-Inf	95.92	3	Vertical	208	1.80	80	34.01	7.56	34.92			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5180MHz_TX

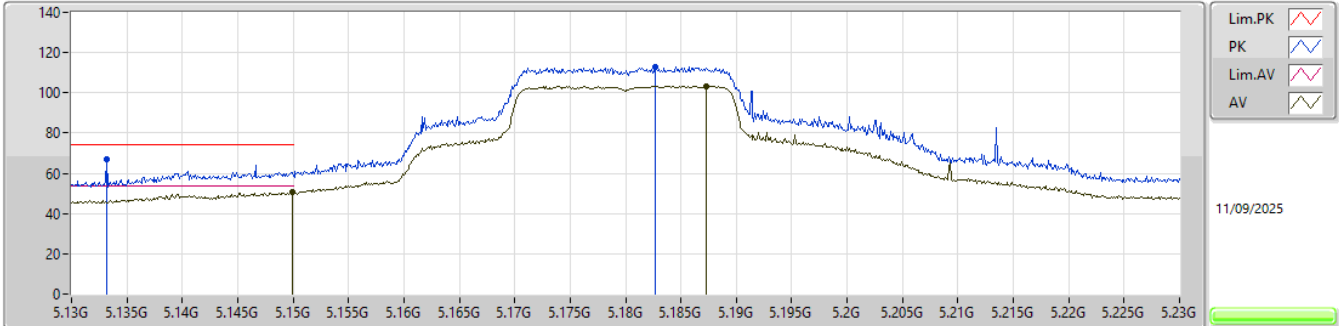


EUT_Y_1TX
SET 80
80
3.24

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1332G	66.87	74.00	-7.13	60.45	3	Horizontal	162	2.12	80	33.90	7.45	34.93			
AV	5.1499G	50.76	54.00	-3.24	44.30	3	Horizontal	162	2.12	80	33.90	7.49	34.93			
PK	5.1827G	113.02	Inf	-Inf	106.34	3	Horizontal	162	2.12	80	34.03	7.57	34.92			
AV	5.1873G	103.41	Inf	-Inf	96.70	3	Horizontal	162	2.12	80	34.05	7.58	34.92			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5180MHz_TX

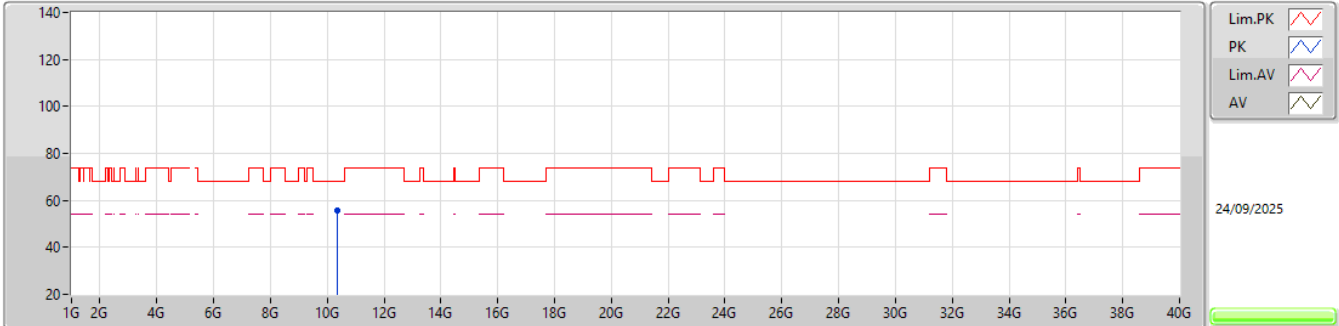


EUT_Y_1TX
Setting 80
03-C-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36675G	55.69	68.20	-12.51	51.96	3	Vertical	334	1.73	-	38.03	11.17	45.47			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5180MHz_TX

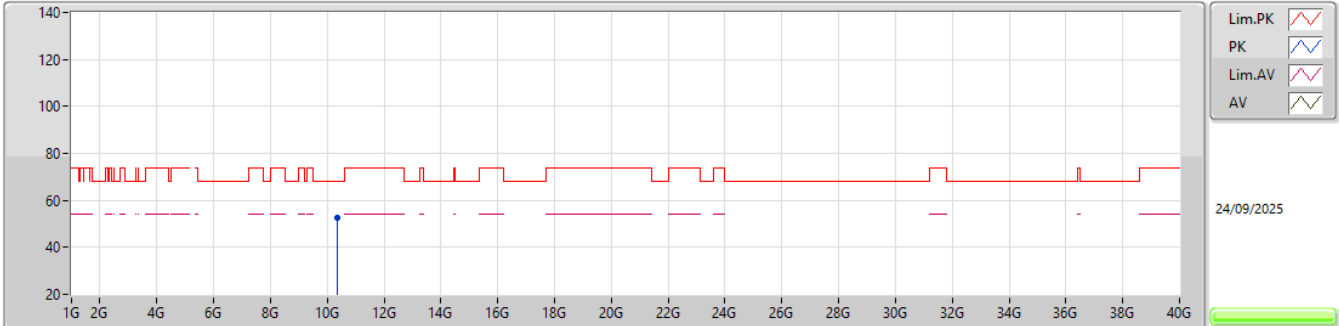


EUT_V_1TX
Setting 80
03-C-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35625G	52.72	68.20	-15.48	48.95	3	Horizontal	4	1.79	-	38.08	11.16	45.47			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5200MHz_TX

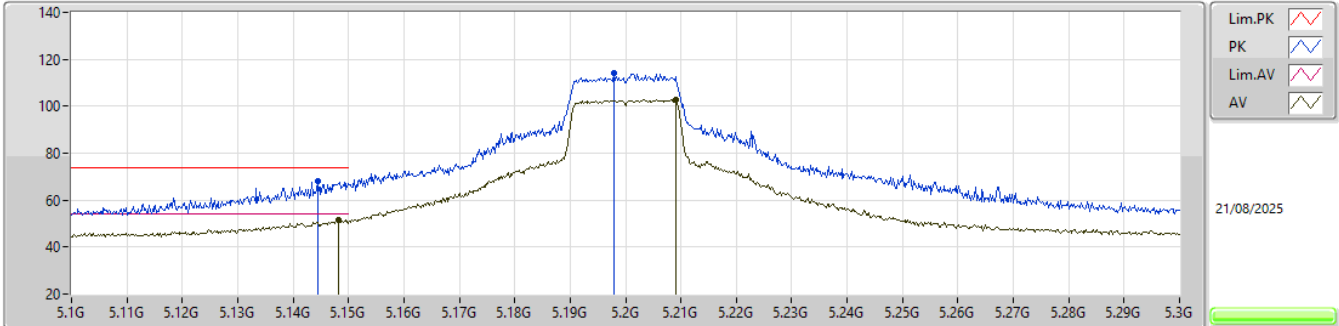


EUT_Y_1TX
Setting 82
03-C-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1444G	67.86	74.00	-6.14	61.41	3	Vertical	31	2.16	-	33.90	7.48	34.93			
AV	5.1482G	51.72	54.00	-2.28	45.26	3	Vertical	31	2.16	-	33.90	7.49	34.93			
PK	5.198G	114.18	Inf	-Inf	107.40	3	Vertical	31	2.16	-	34.09	7.61	34.92			
AV	5.209G	102.87	Inf	-Inf	96.07	3	Vertical	31	2.16	-	34.10	7.62	34.92			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5200MHz_TX

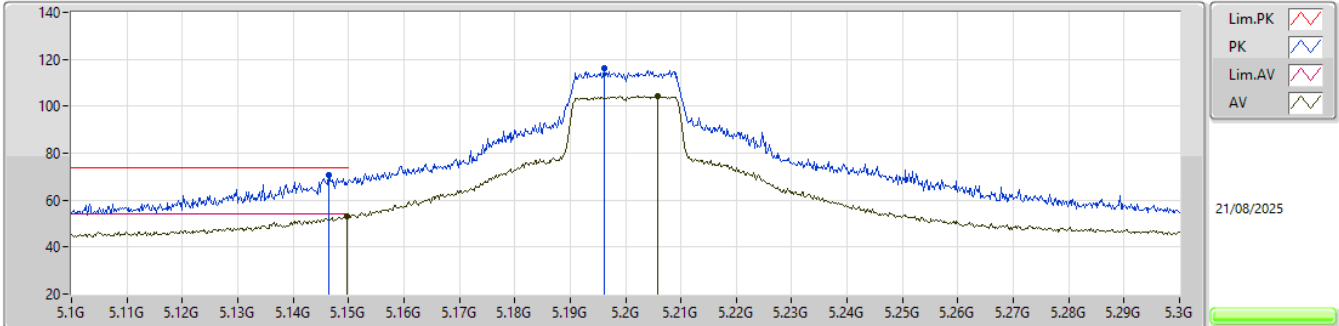


EUT Y_1TX
Setting 82
03-C-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1464G	70.57	74.00	-3.43	64.12	3	Horizontal	355	1.94	-	33.90	7.48	34.93			
AV	5.1498G	53.04	54.00	-0.96	46.58	3	Horizontal	355	1.94	-	33.90	7.49	34.93			
PK	5.1962G	115.99	Inf	-Inf	109.23	3	Horizontal	355	1.94	-	34.08	7.60	34.92			
AV	5.2058G	104.54	Inf	-Inf	97.74	3	Horizontal	355	1.94	-	34.10	7.62	34.92			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5200MHz_TX

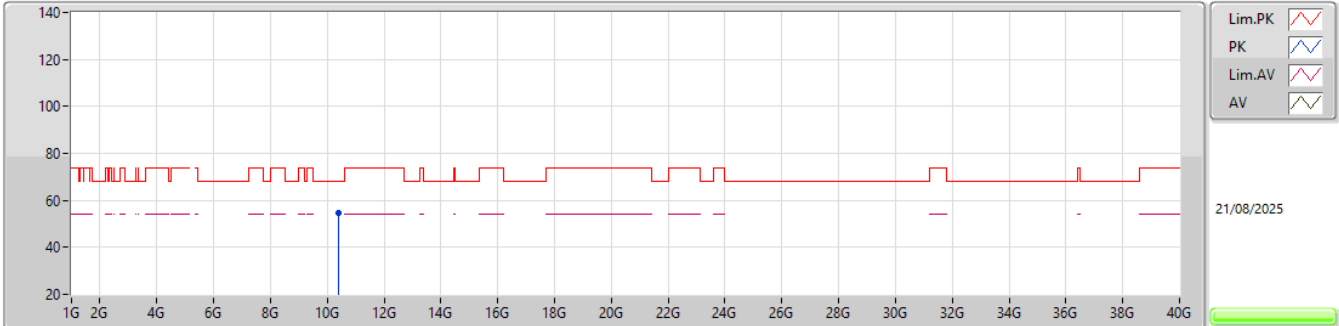


EUT_Y_1TX
Setting 94
03-C-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.41215G	54.61	68.20	-13.59	51.01	3	Vertical	334	1.80	-	37.90	11.19	45.49				

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5200MHz_TX

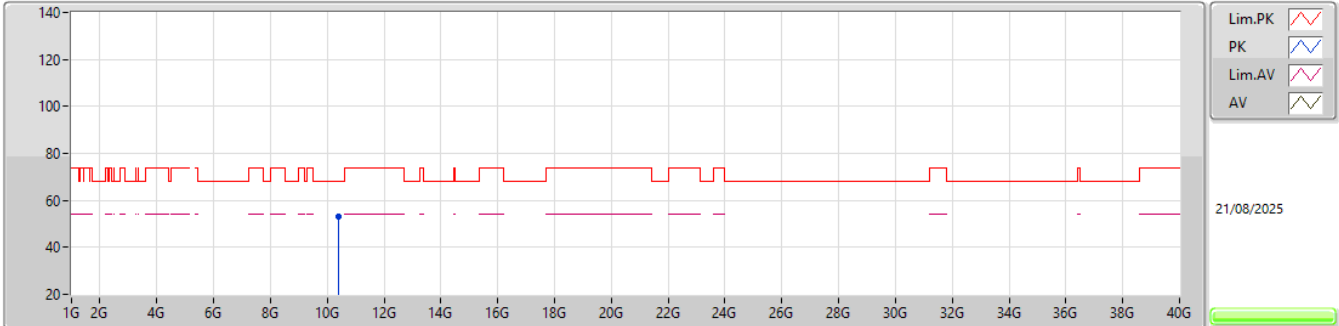


EUT_Y_1TX
Setting 94
03-C-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39815G	53.15	68.20	-15.05	49.55	3	Horizontal	4	1.75	-	37.91	11.18	45.49			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5240MHz_TX

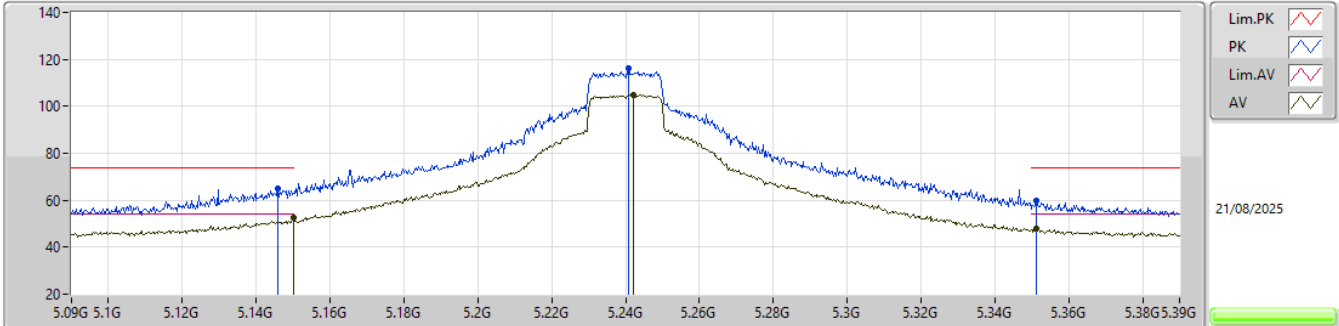


EUT_Y_1TX
Setting 94
03-C-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1458G	64.85	74.00	-9.15	58.40	3	Vertical	30	2.16	-	33.90	7.48	34.93			
AV	5.15G	52.44	54.00	-1.56	45.98	3	Vertical	30	2.16	-	33.90	7.49	34.93			
PK	5.2409G	116.08	Inf	-Inf	109.23	3	Vertical	30	2.16	-	34.10	7.66	34.91			
AV	5.2421G	104.93	Inf	-Inf	98.08	3	Vertical	30	2.16	-	34.10	7.66	34.91			
PK	5.3513G	59.85	74.00	-14.15	52.43	3	Vertical	30	2.16	-	34.51	7.80	34.89			
AV	5.3513G	47.89	54.00	-6.11	40.47	3	Vertical	30	2.16	-	34.51	7.80	34.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5240MHz_TX

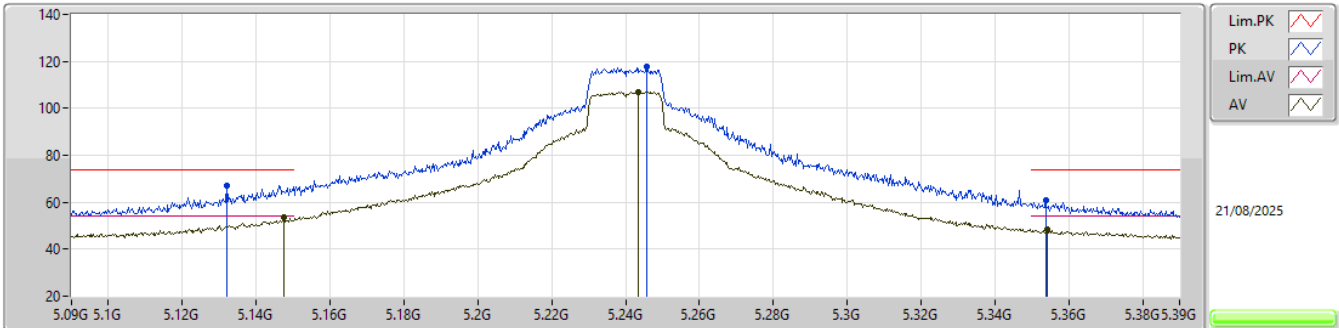


EUT_Y_1TX
Setting 94
03-C-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.132G	67.21	74.00	-6.79	60.79	3	Horizontal	354	1.93	-	33.90	7.45	34.93			
AV	5.1476G	53.83	54.00	-0.17	47.37	3	Horizontal	354	1.93	-	33.90	7.49	34.93			
PK	5.2457G	117.87	Inf	-Inf	111.01	3	Horizontal	354	1.93	-	34.10	7.67	34.91			
AV	5.2436G	106.99	Inf	-Inf	100.14	3	Horizontal	354	1.93	-	34.10	7.66	34.91			
PK	5.3537G	61.12	74.00	-12.88	53.70	3	Horizontal	354	1.93	-	34.51	7.80	34.89			
AV	5.3543G	48.38	54.00	-5.62	40.95	3	Horizontal	354	1.93	-	34.52	7.80	34.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5240MHz_TX

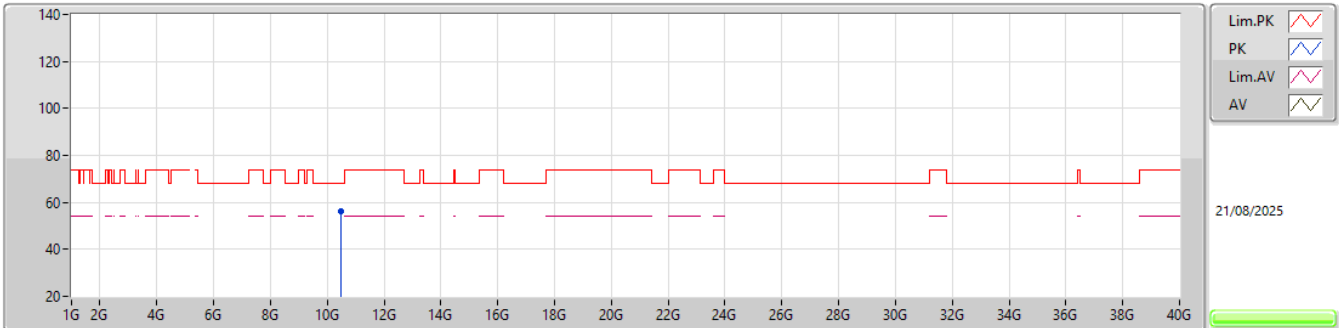


EUT_Y_1TX
Setting 94
03-C-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4832G	56.43	68.20	-11.77	52.71	3	Vertical	6	2.90	-	38.03	11.22	45.53			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5240MHz_TX

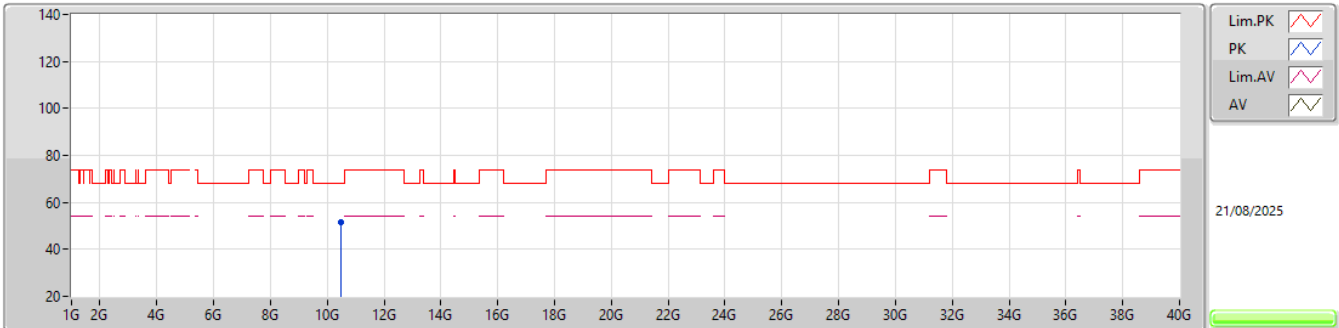

EUT_Y_1TX
Setting 94
03-C-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.4794G	51.81	68.20	-16.39	48.11	3	Horizontal	358	1.80	-	38.02	11.21	45.53				