



11ac(VHT80)_TX_CH_106_Horizontal

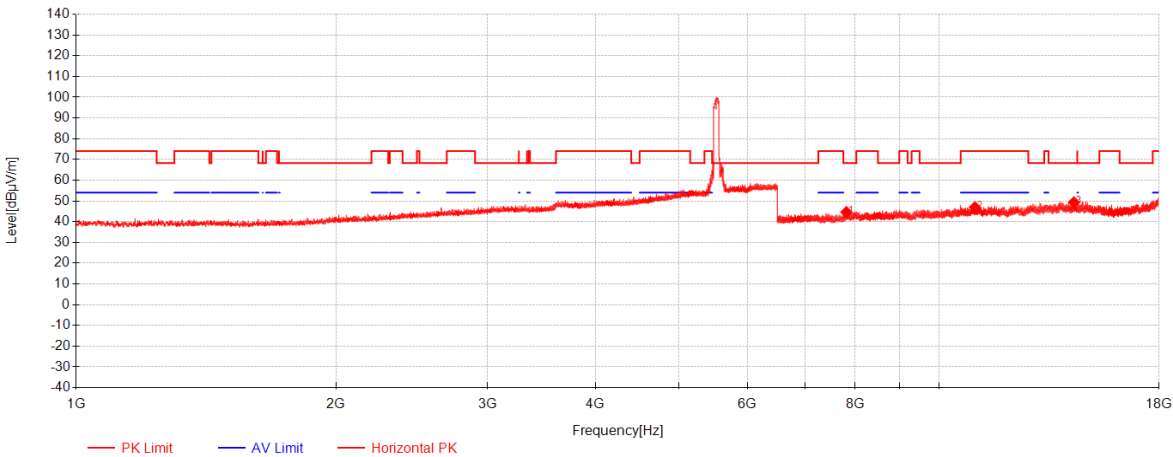


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7812.5333	48.79	36.93	-41.08	44.63	68.20	23.57	Horizontal
2	11008.3833	43.65	39.29	-35.97	46.98	74.00	27.02	Horizontal
3	14339.9333	43.64	40.20	-34.49	49.35	68.20	18.85	Horizontal

11ac(VHT80)_TX_CH_106_Vertical

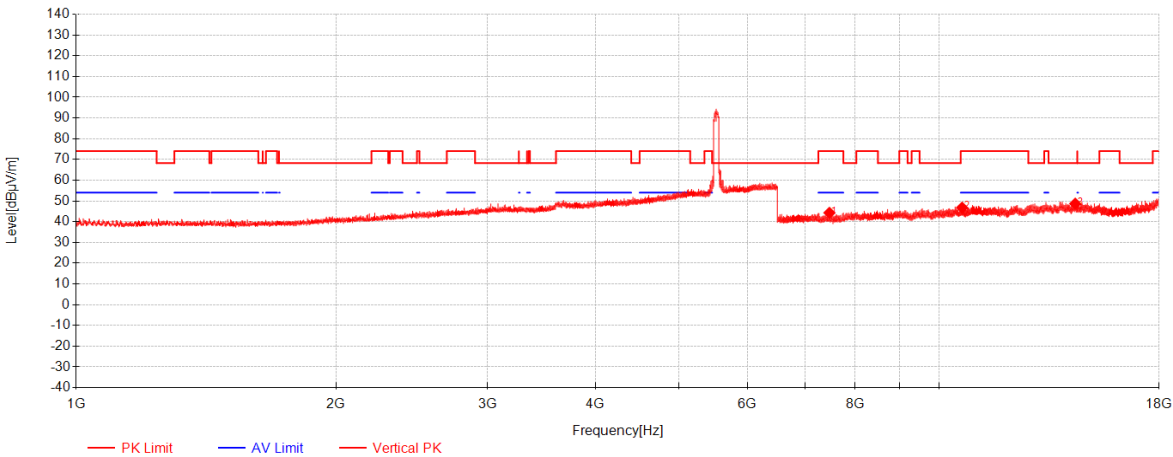

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7467.9167	50.02	36.30	-42.04	44.28	74.00	29.72	Vertical
2	10641.15	44.24	38.87	-36.35	46.76	74.00	27.24	Vertical
3	14390.15	42.40	40.17	-33.88	48.69	68.20	19.51	Vertical


11ac(VHT80)_TX_CH_122_Horizontal

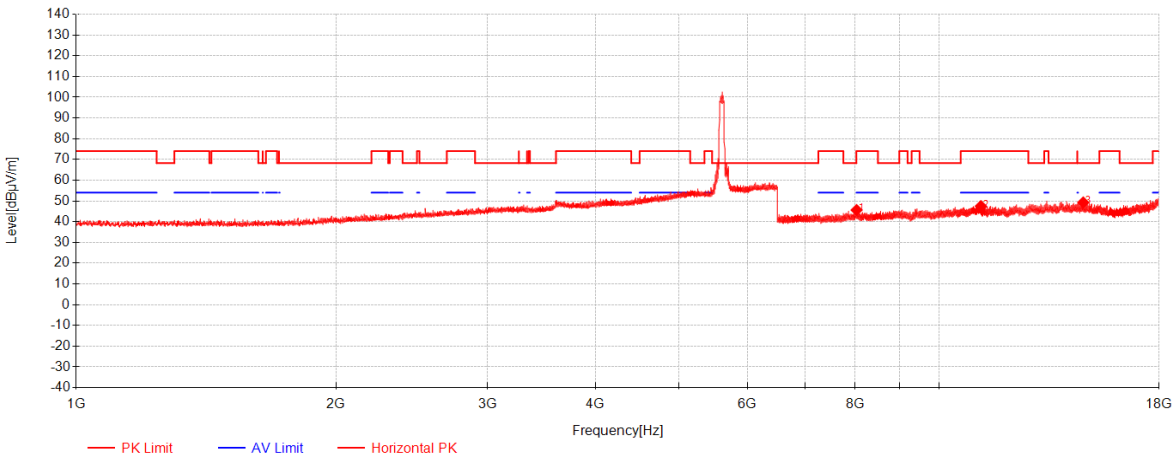

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	8029.1167	49.45	37.32	-41.14	45.63	74.00	28.37	Horizontal
2	11187.4	43.48	39.19	-35.15	47.52	74.00	26.48	Horizontal
3	14702.5667	43.14	39.98	-33.84	49.28	68.20	18.92	Horizontal




11ac(VHT80)_TX_CH_122_Vertical

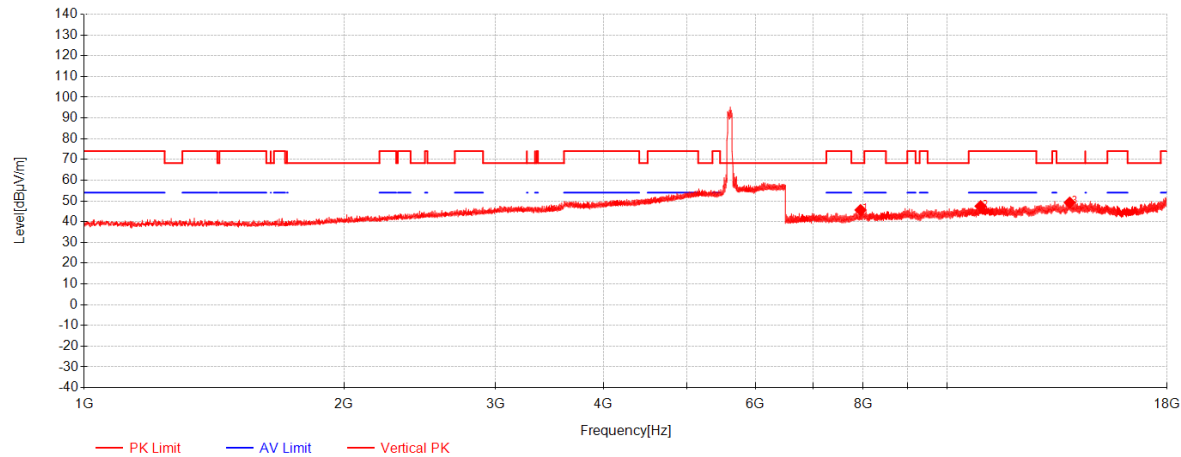


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7943.25	49.80	37.19	-41.36	45.62	68.20	22.58	Vertical
2	10943.9833	44.34	39.23	-36.11	47.47	74.00	26.53	Vertical
3	13881.0833	42.92	40.34	-34.06	49.21	68.20	18.99	Vertical

11ac(VHT80)_TX_CH_155_Horizontal

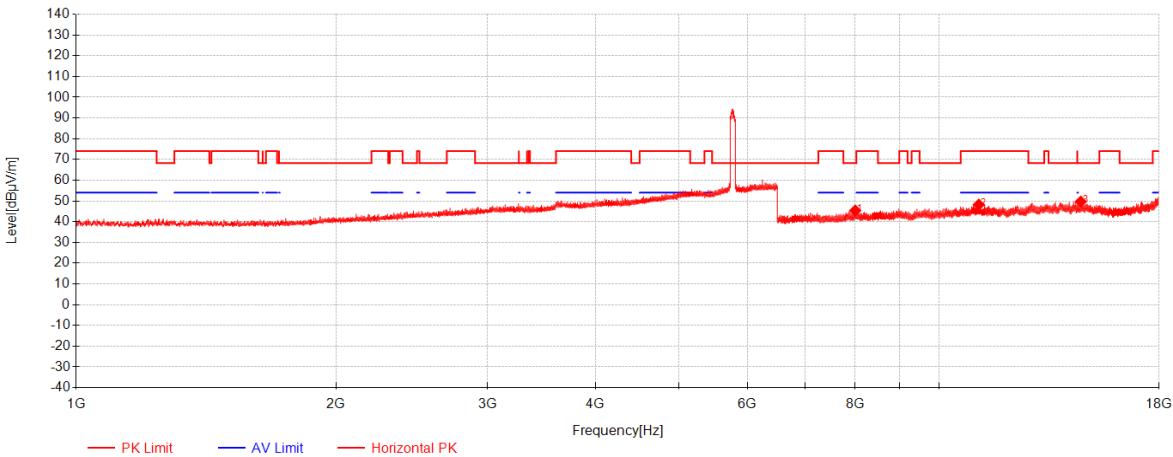

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7999.2167	49.26	37.30	-41.18	45.38	68.20	22.82	Horizontal
2	11126.0667	44.57	39.22	-35.57	48.22	74.00	25.78	Horizontal
3	14604.05	44.17	40.04	-34.52	49.69	68.20	18.51	Horizontal

11ac(VHT80)_TX_CH_155_Vertical

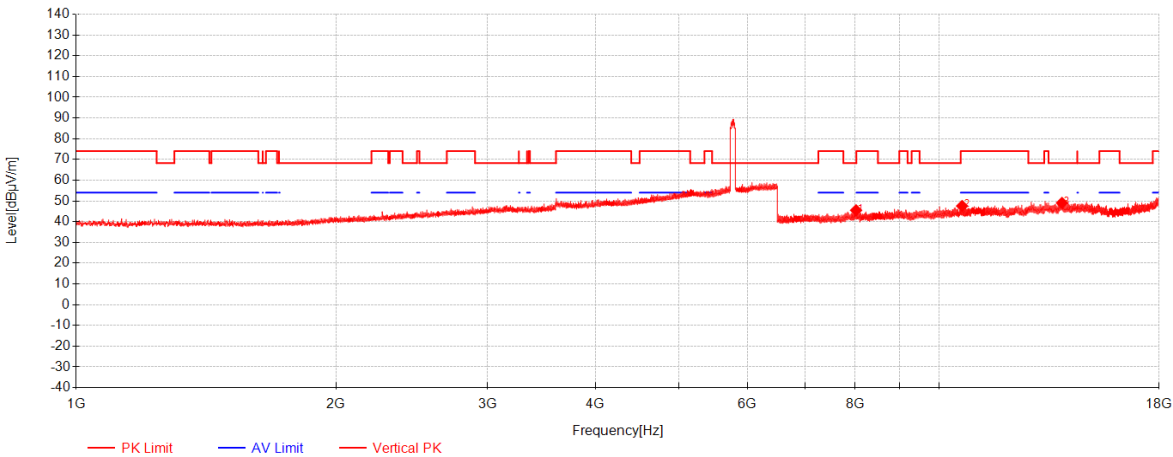

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	8018.3833	49.36	37.31	-41.15	45.52	68.20	22.68	Vertical
2	10640.3833	45.05	38.87	-36.36	47.56	74.00	26.44	Vertical
3	13891.8167	42.63	40.35	-33.91	49.07	68.20	19.13	Vertical

7.4 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 (4) For transmitters operating in the 5.725-5.85 GHz band:
 (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 46 % RH

Atmospheric Pressure: 1024 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Charge + TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	06	Charge + TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	07	Charge + TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	08	Charge + TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

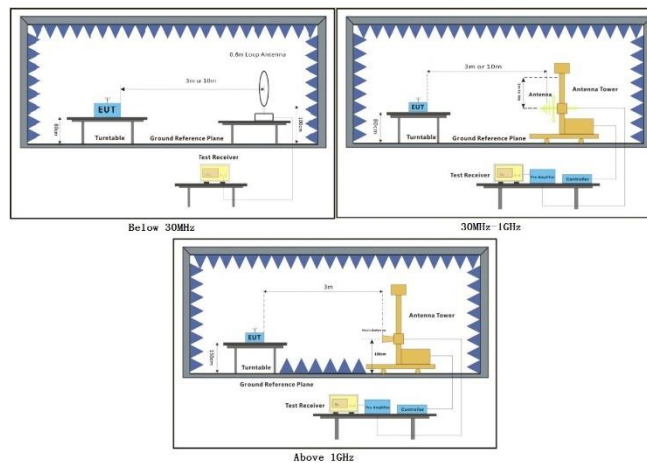

7.4.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.


Remark 3. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

11a_TX_CH_36_Horizontal_Peak

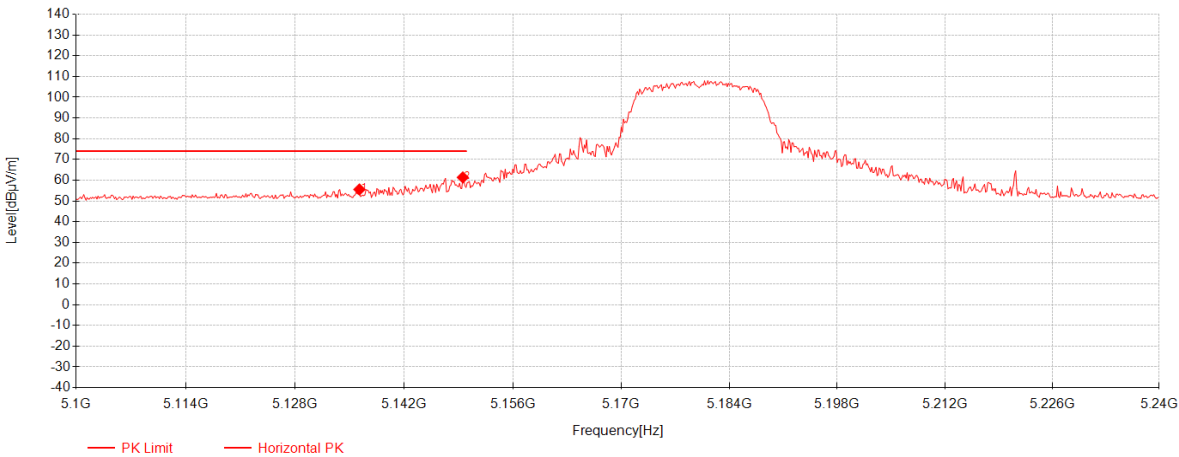


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5136.26	40.69	33.07	-18.22	55.54	74.00	18.46	Horizontal
2	5149.56	46.45	33.07	-18.18	61.34	74.00	12.66	Horizontal

11a_TX_CH_36_Horizontal_Average

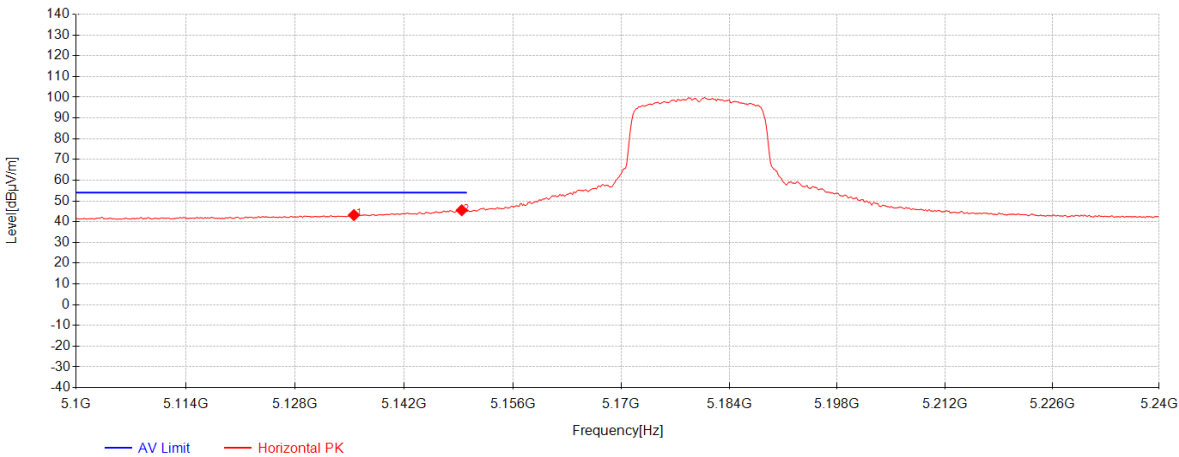


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5135.56	28.35	33.07	-18.22	43.20	54.00	10.80	Horizontal
2	5149.42	30.61	33.07	-18.18	45.50	54.00	8.50	Horizontal

11a_TX_CH_36_Vertical_Peak

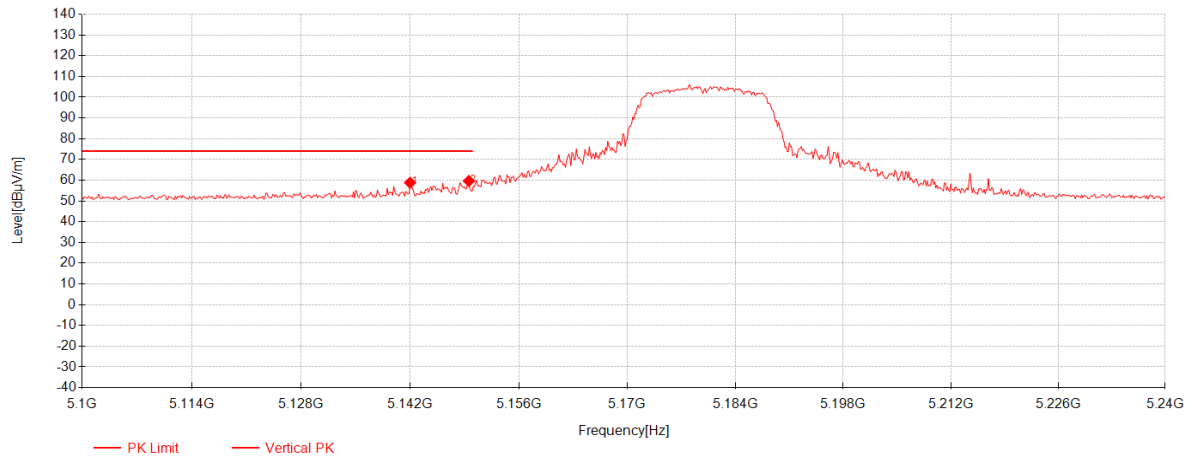


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5142	43.93	33.07	-18.20	58.80	74.00	15.20	Vertical
2	5149.56	44.76	33.07	-18.18	59.65	74.00	14.35	Vertical

11a_TX_CH_36_Veritical_Average

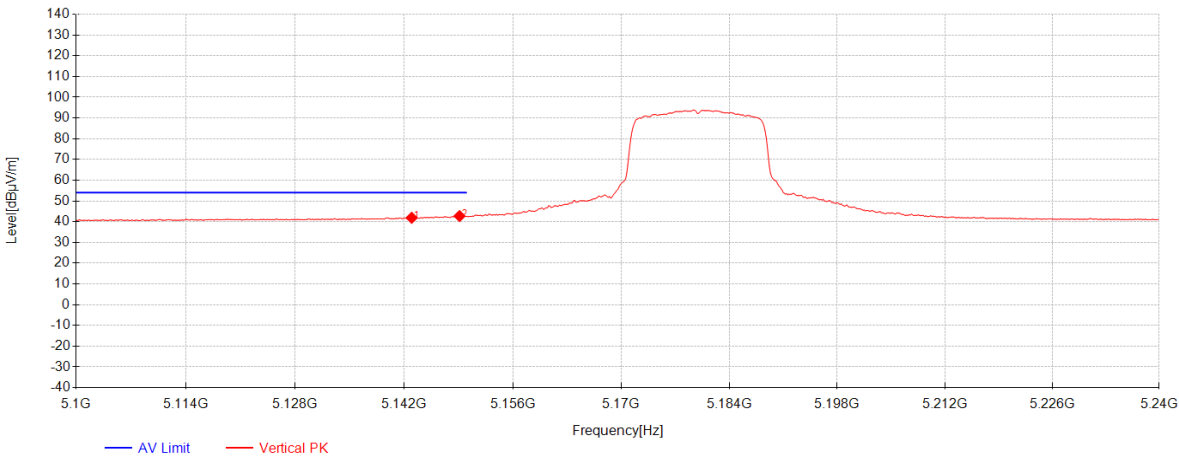


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5142.98	27.01	33.07	-18.20	41.88	54.00	12.12	Vertical
2	5149.14	27.84	33.07	-18.18	42.73	54.00	11.27	Vertical

11a_TX_CH_64_Horizontal_Peak

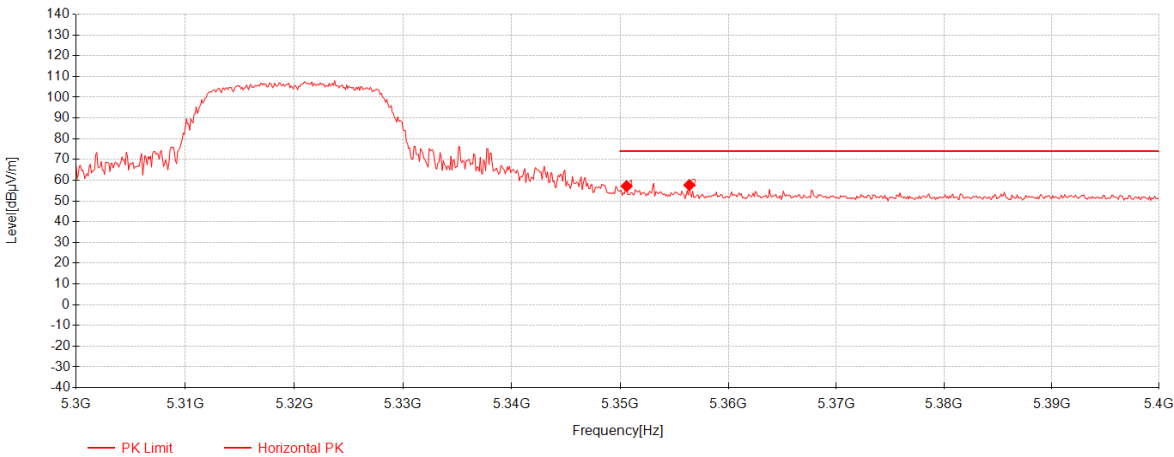


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.6	41.87	33.03	-17.75	57.15	74.00	16.85	Horizontal
2	5356.4	42.40	33.03	-17.76	57.67	74.00	16.33	Horizontal

11a_TX_CH_64_Horizontal_Average

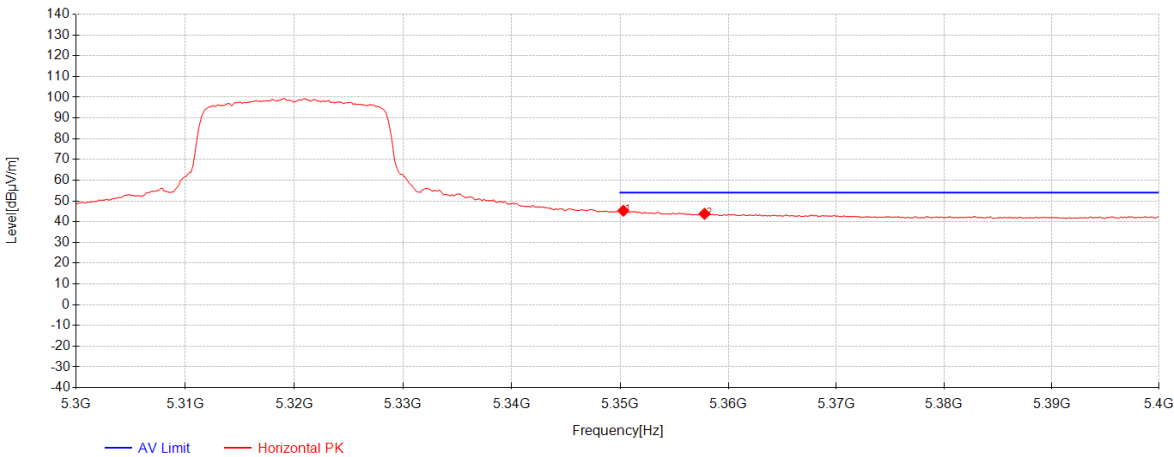


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.3	30.00	33.03	-17.75	45.28	54.00	8.72	Horizontal
2	5357.8	28.53	33.03	-17.76	43.80	54.00	10.20	Horizontal

11a_TX_CH_64_Vertical_Peak

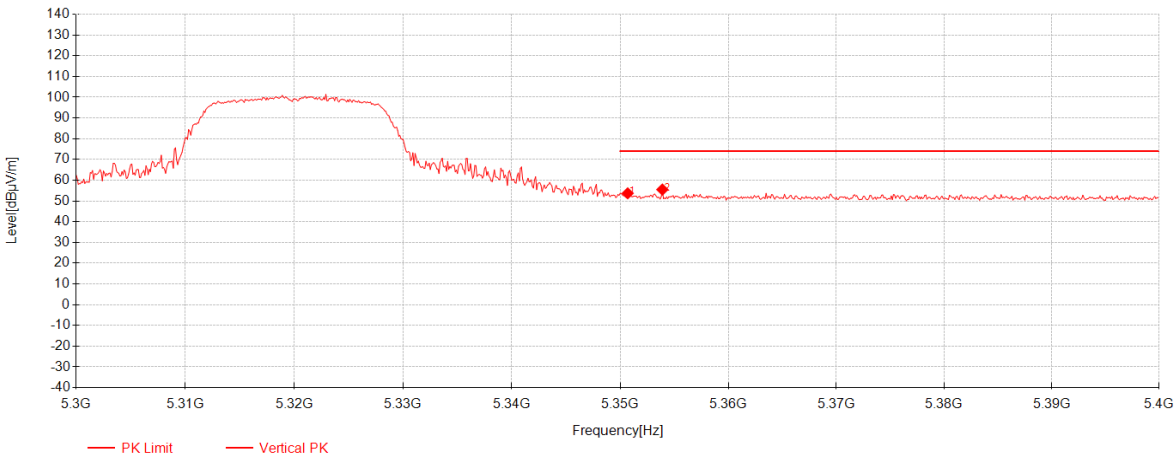


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.7	38.40	33.03	-17.75	53.68	74.00	20.32	Vertical
2	5353.9	40.22	33.03	-17.76	55.49	74.00	18.51	Vertical

11a_TX_CH_64_Vertical_Average

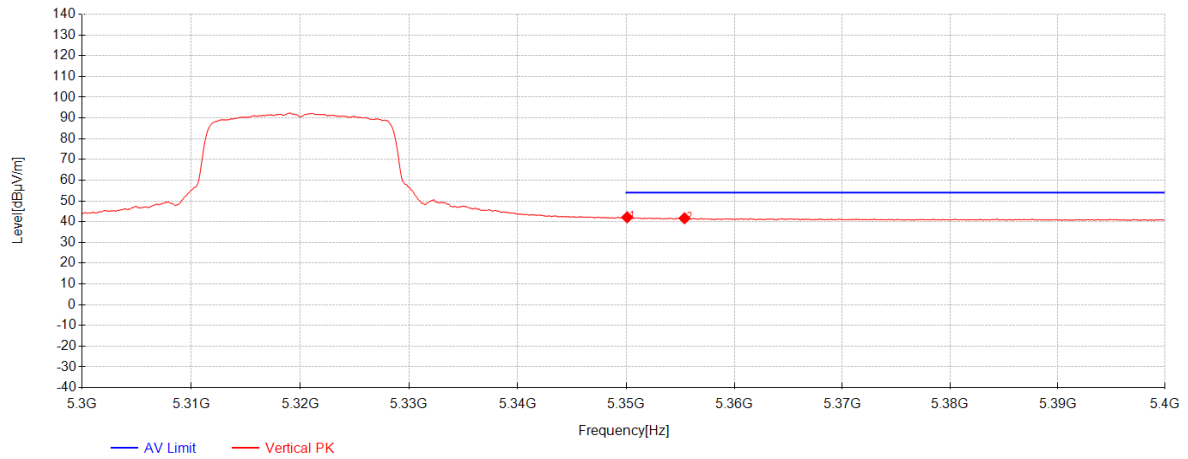


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.1	26.85	33.03	-17.75	42.13	54.00	11.87	Vertical
2	5355.4	26.38	33.03	-17.76	41.65	54.00	12.35	Vertical

11a_TX_CH_100_Horizontal_Peak

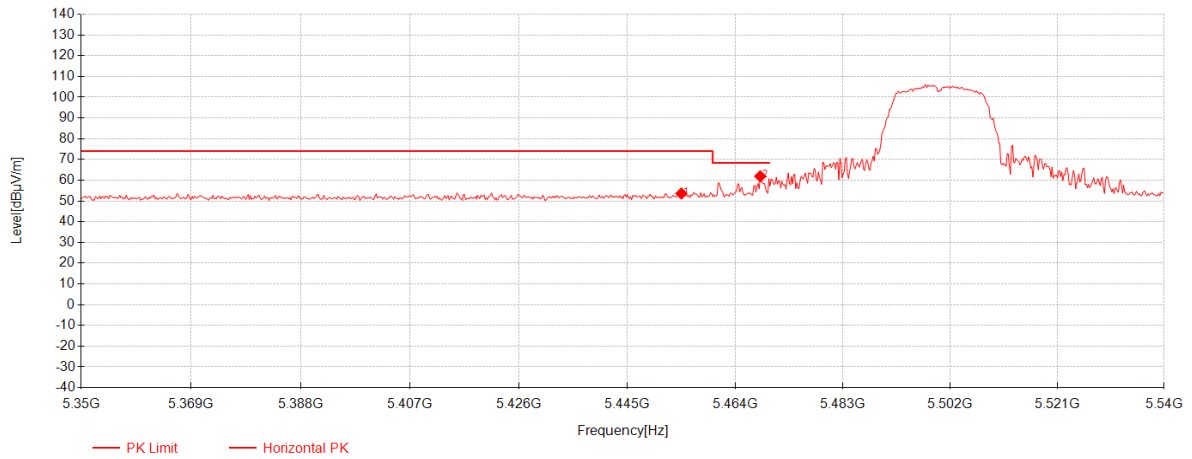


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5454.5	38.24	33.01	-17.66	53.59	74.00	20.41	Horizontal
2	5468.37	46.50	33.01	-17.61	61.89	68.30	6.41	Horizontal

11a_TX_CH_100_Horizontal_Average

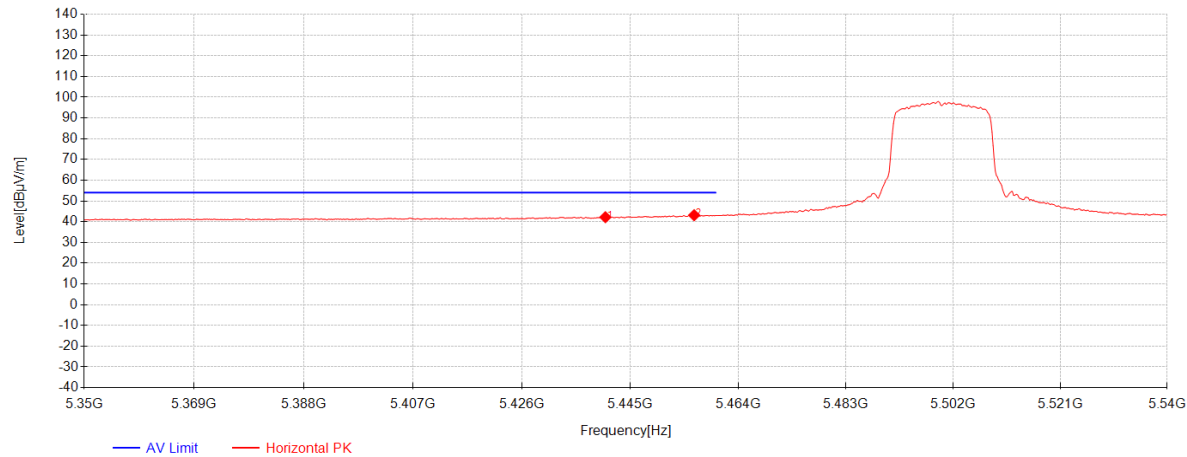

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5440.63	26.87	33.01	-17.70	42.18	54.00	11.82	Horizontal
2	5456.21	27.77	33.01	-17.65	43.13	54.00	10.87	Horizontal


11a_TX_CH_100_Vertical_Peak

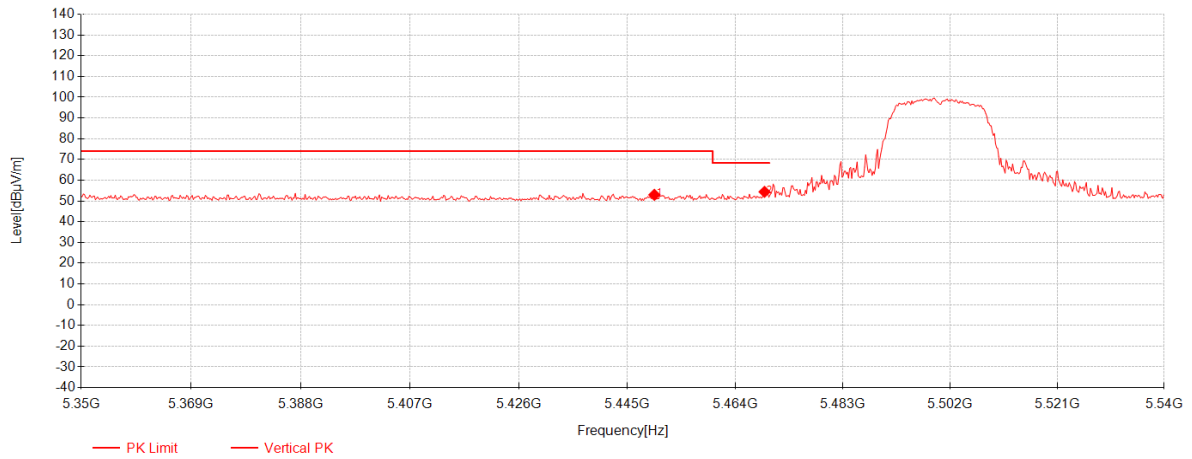


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5449.75	37.61	33.01	-17.67	52.95	74.00	21.05	Vertical
2	5469.13	39.02	33.01	-17.61	54.41	68.30	13.89	Vertical



11a_TX_CH_100_Veritical_Average

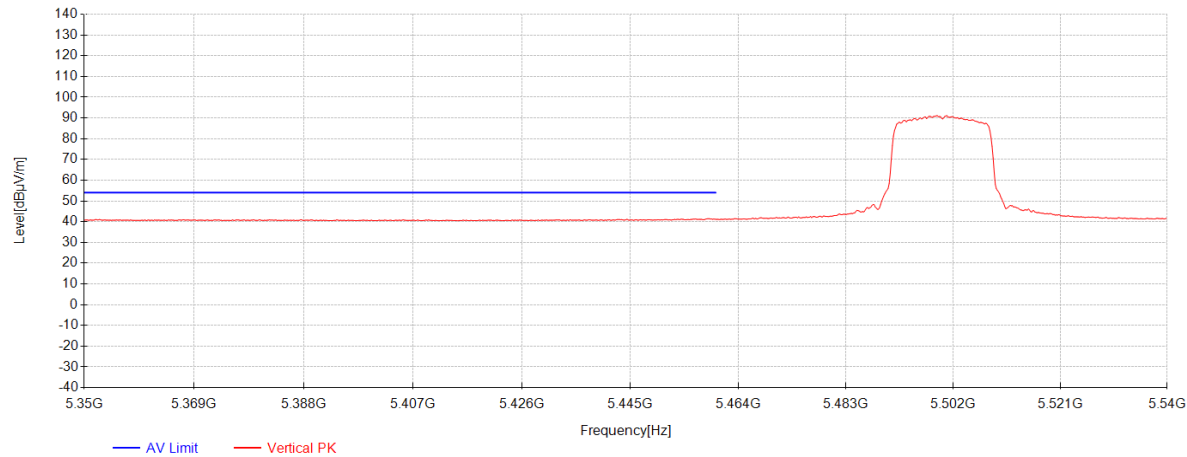


11a_TX_CH_140_Horizontal_Peak

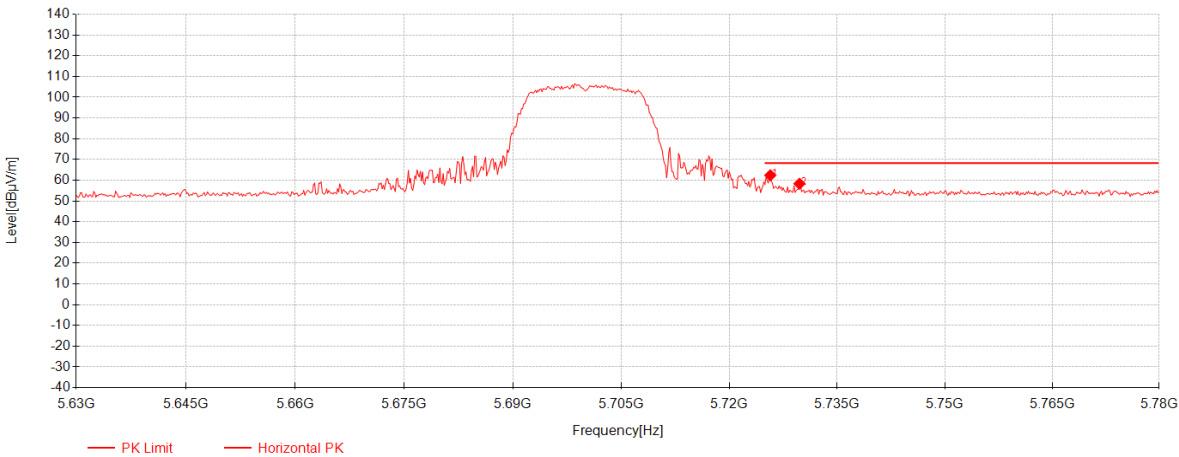


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.7	45.94	33.68	-17.25	62.37	68.20	5.83	Horizontal
2	5729.75	41.84	33.69	-17.24	58.29	68.20	9.91	Horizontal

11a_TX_CH_140_Vertical_Peak

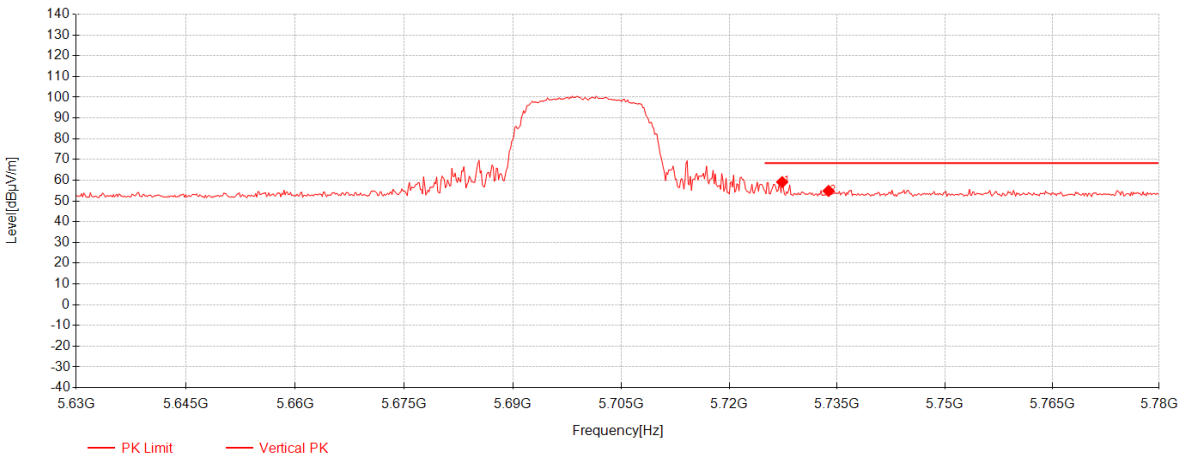


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5727.35	42.66	33.68	-17.25	59.10	68.20	9.10	Vertical
2	5733.8	38.36	33.70	-17.23	54.84	68.20	13.36	Vertical

11a_TX_CH_149_Horizontal_Peak

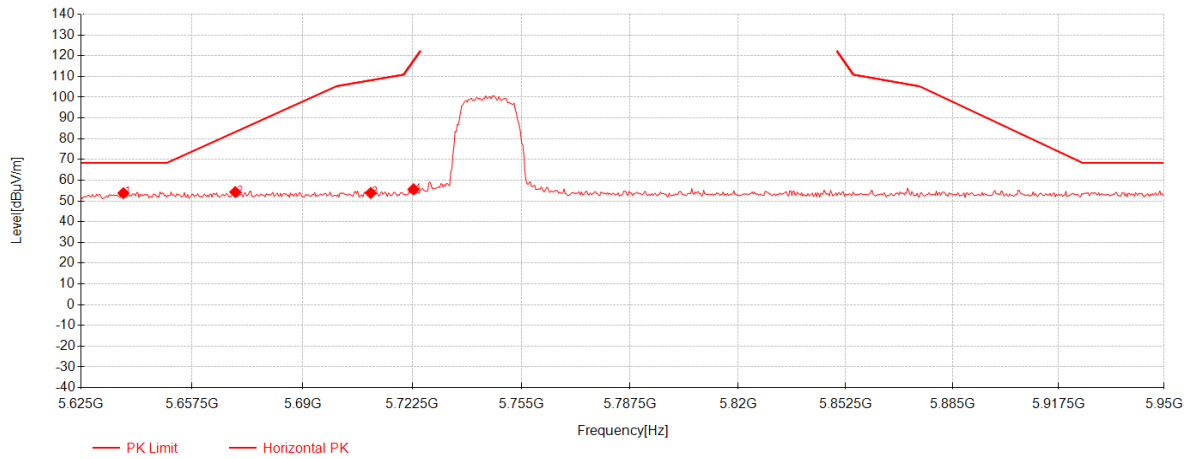


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5637.35	37.62	33.41	-17.27	53.76	68.30	14.54	Horizontal
2	5670.175	38.07	33.51	-17.30	54.28	83.27	28.99	Horizontal
3	5710.15	37.53	33.63	-17.30	53.86	108.14	54.28	Horizontal
4	5722.825	39.21	33.67	-17.26	55.62	117.34	61.72	Horizontal

11a_TX_CH_149_Vertical_Peak

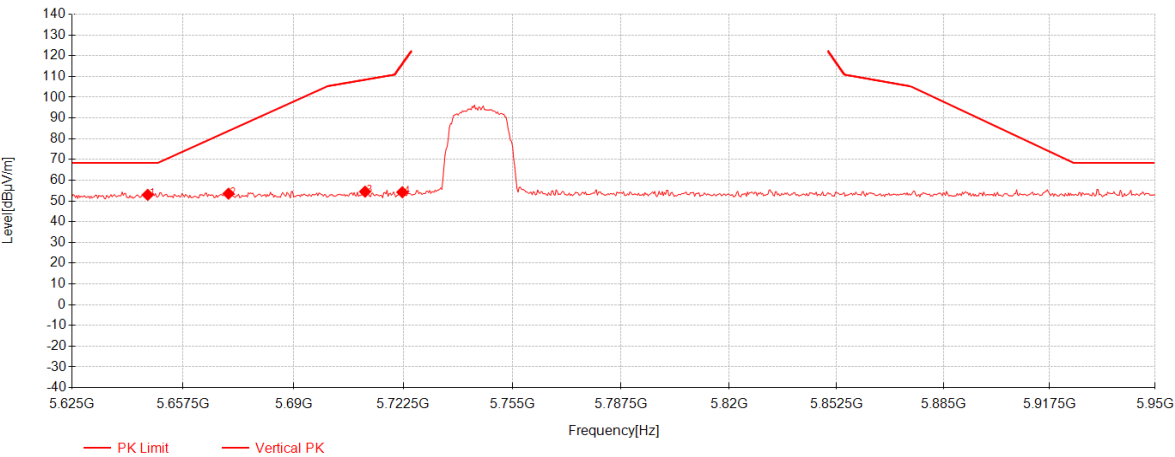


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5647.1	36.79	33.44	-17.28	52.95	68.30	15.35	Vertical
2	5670.825	37.32	33.51	-17.30	53.53	83.75	30.22	Vertical
3	5711.125	38.15	33.63	-17.30	54.49	108.42	53.93	Vertical
4	5722.175	37.79	33.67	-17.26	54.20	115.86	61.66	Vertical

11a_TX_CH_165_Horizontal_Peak

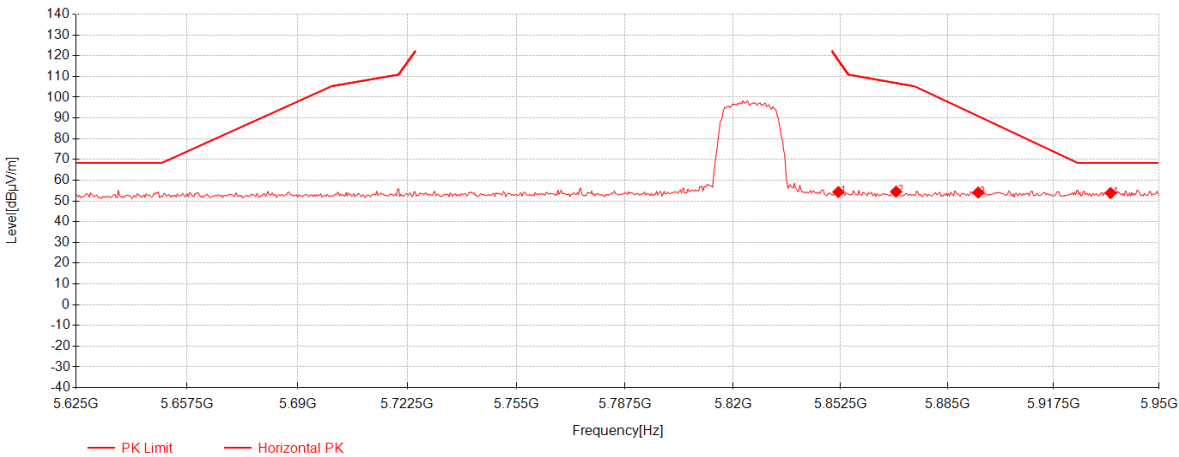


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.85	37.15	34.06	-16.91	54.29	118.08	63.79	Horizontal
2	5869.4	37.25	34.11	-16.87	54.48	106.87	52.39	Horizontal
3	5894.425	36.69	34.18	-16.82	54.05	90.89	36.84	Horizontal
4	5935.05	36.42	34.31	-16.92	53.81	68.30	14.49	Horizontal

11a_TX_CH_165_Veritical_Peak

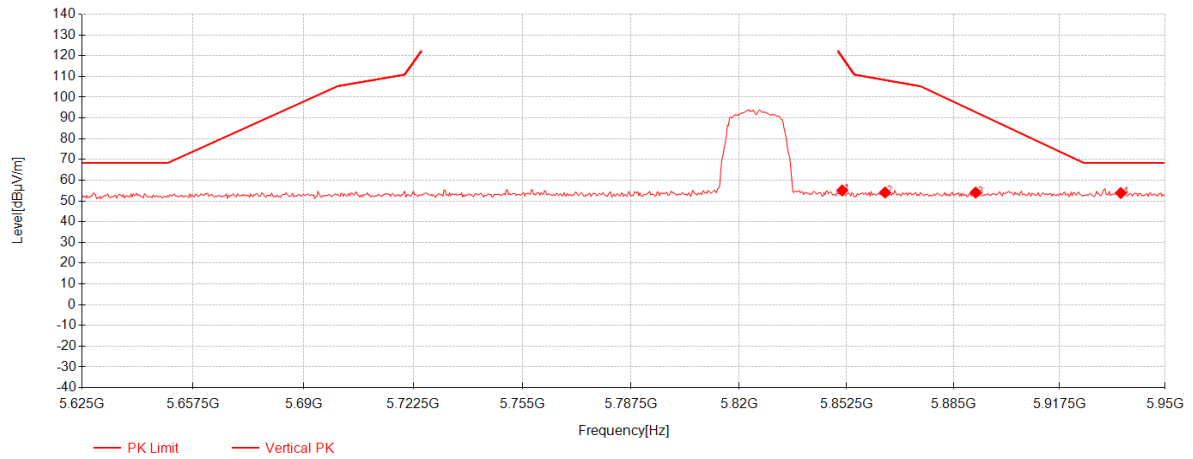


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.2	37.93	34.05	-16.91	55.07	119.56	64.49	Vertical
2	5864.2	36.88	34.09	-16.89	54.09	108.32	54.23	Vertical
3	5891.825	36.70	34.18	-16.83	54.05	92.81	38.76	Vertical
4	5936.35	36.43	34.31	-16.92	53.82	68.30	14.48	Vertical

11ac(VHT20)_TX_CH_36_Horizontal_Peak

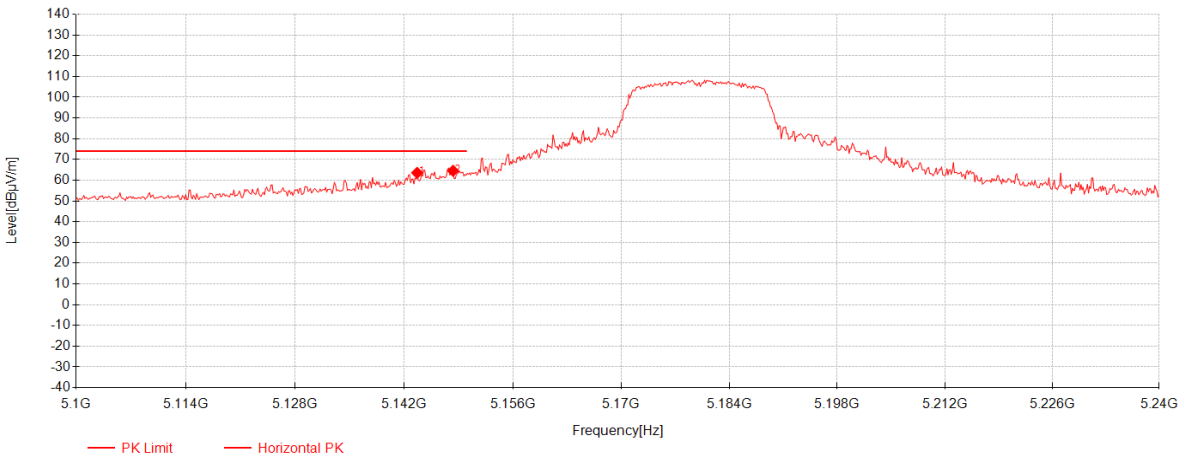


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.68	48.70	33.07	-18.20	63.57	74.00	10.43	Horizontal
2	5148.3	49.67	33.07	-18.19	64.56	74.00	9.44	Horizontal

11ac(VHT20)_TX_CH_36_Horizontal_Average

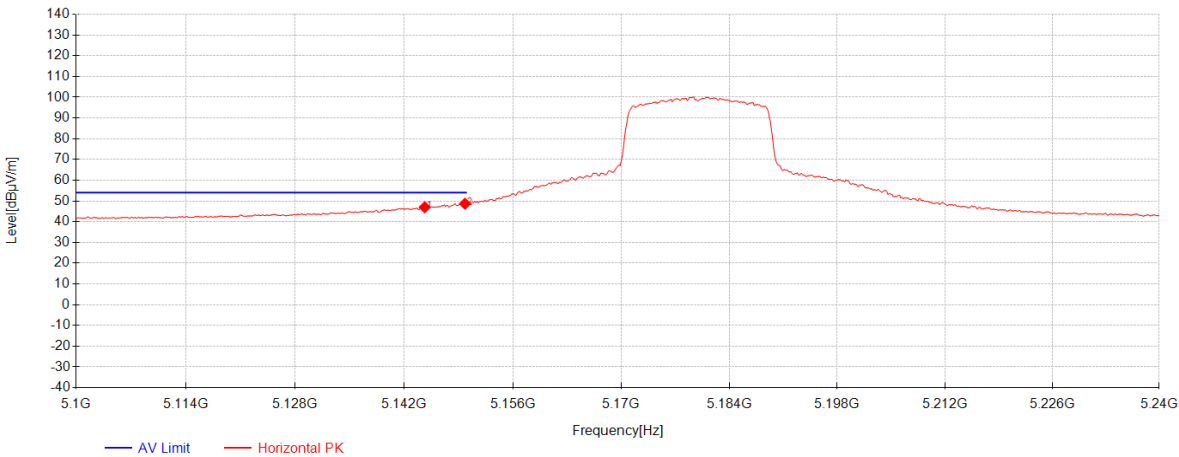


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5144.66	32.11	33.07	-18.20	46.99	54.00	7.01	Horizontal
2	5149.84	33.78	33.07	-18.18	48.67	54.00	5.33	Horizontal

11ac(VHT20)_TX_CH_36_Vertical_Peak

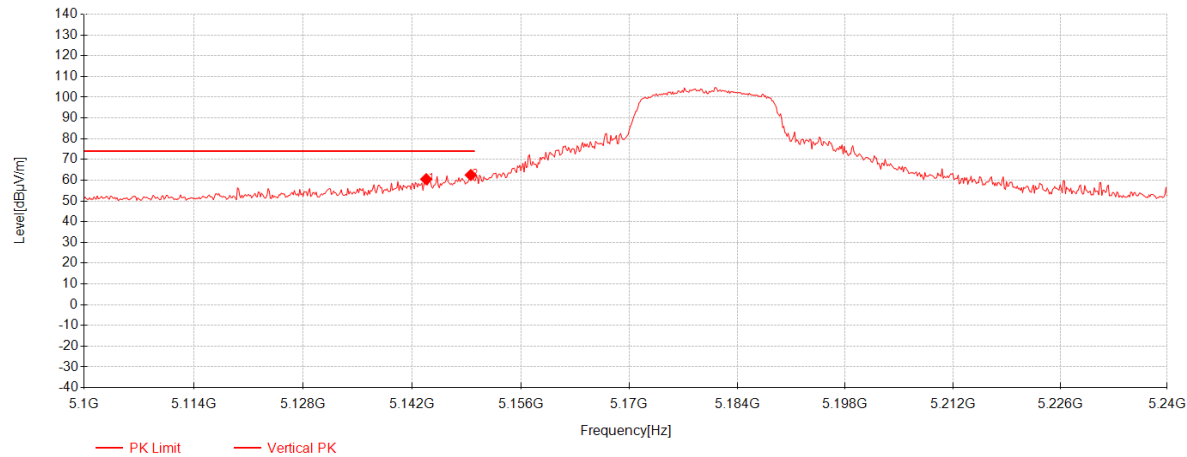


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.82	45.62	33.07	-18.20	60.49	74.00	13.51	Vertical
2	5149.56	47.61	33.07	-18.18	62.50	74.00	11.50	Vertical

11ac(VHT20)_TX_CH_36_Vetical_Average

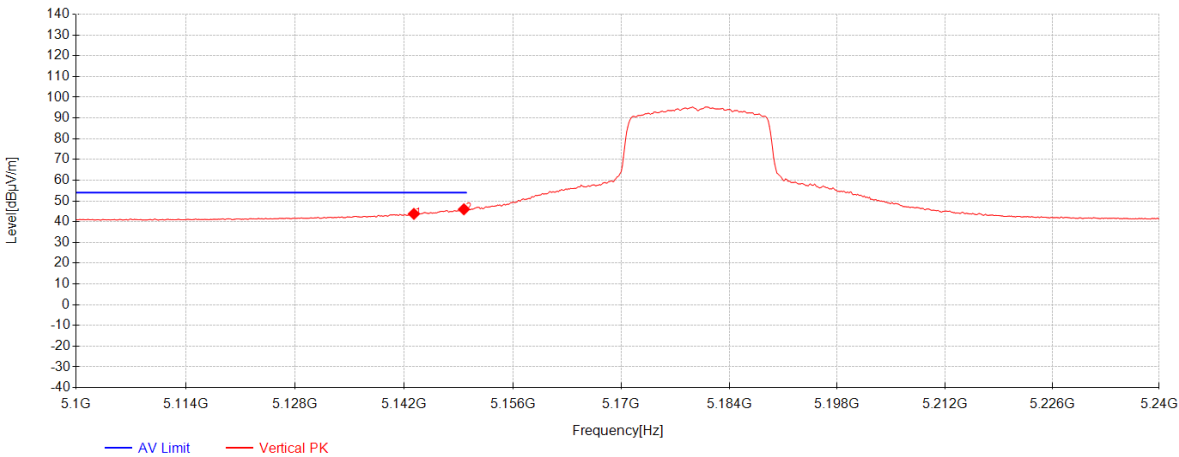


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.26	28.90	33.07	-18.20	43.77	54.00	10.23	Vertical
2	5149.7	31.10	33.07	-18.18	45.99	54.00	8.01	Vertical

11ac(VHT20)_TX_CH_38_Horizontal_Peak

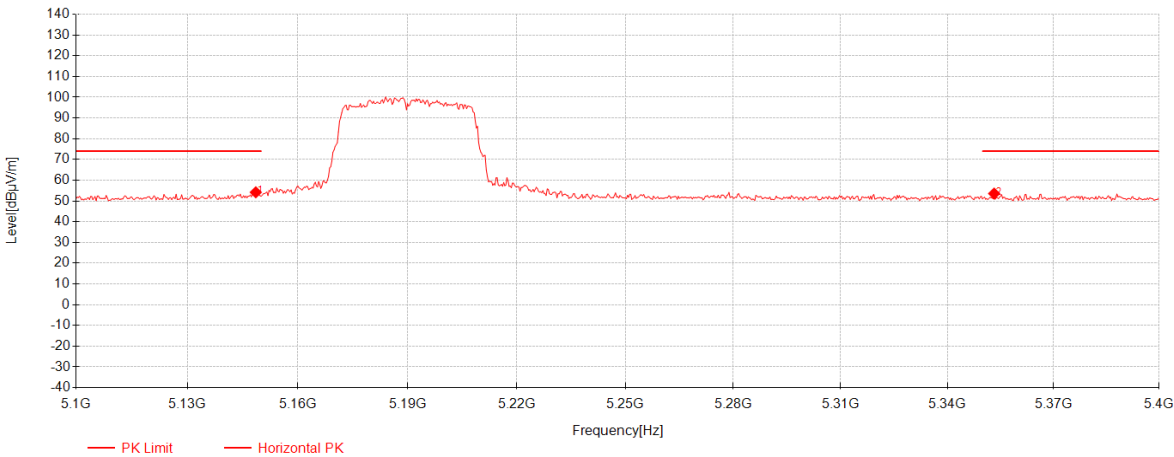

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.6	39.27	33.07	-18.18	54.16	74.00	19.84	Horizontal
2	5353.2	38.30	33.03	-17.75	53.57	74.00	20.43	Horizontal


11ac(VHT20)_TX_CH_38_Horizontal_Average

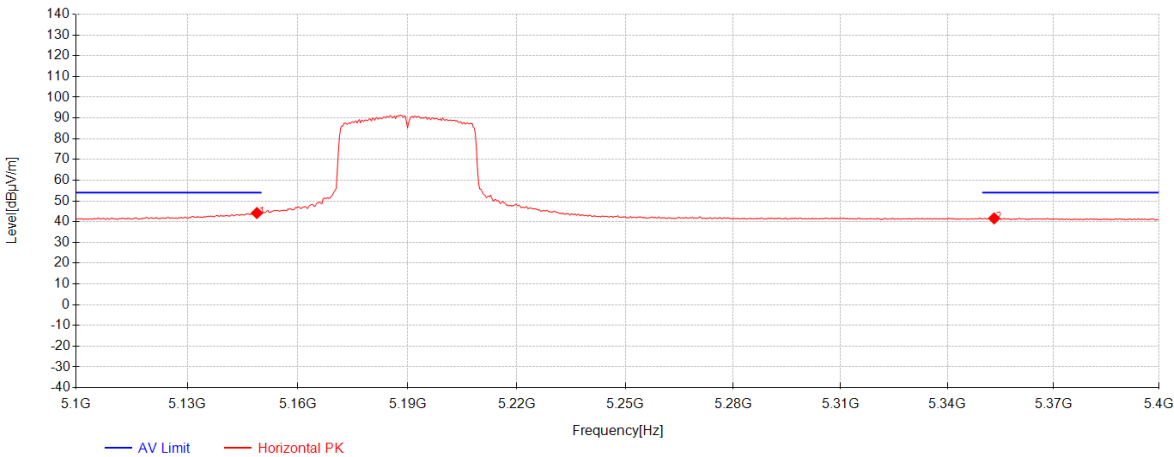

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	29.29	33.07	-18.18	44.18	54.00	9.82	Horizontal
2	5353.2	26.33	33.03	-17.75	41.60	54.00	12.40	Horizontal




11ac(VHT20)_TX_CH_38_Vetical_Peak

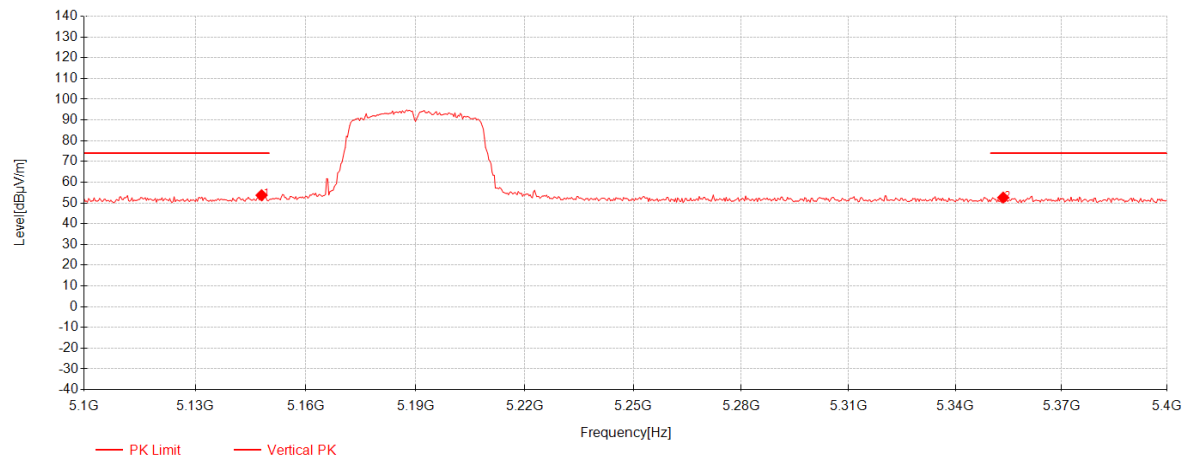

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148	38.84	33.07	-18.19	53.72	74.00	20.28	Vertical
2	5353.5	37.32	33.03	-17.75	52.59	74.00	21.41	Vertical


11ac(VHT20)_TX_CH_38_Vertical_Average

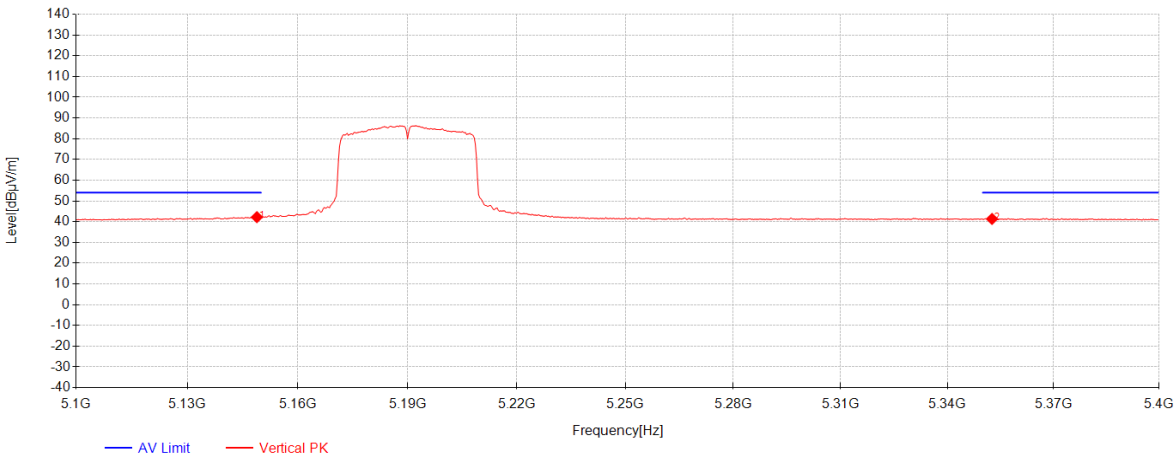

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	27.31	33.07	-18.18	42.20	54.00	11.80	Vertical
2	5352.6	26.06	33.03	-17.75	41.34	54.00	12.66	Vertical




11ac(VHT20)_TX_CH_64_Horizontal_Peak

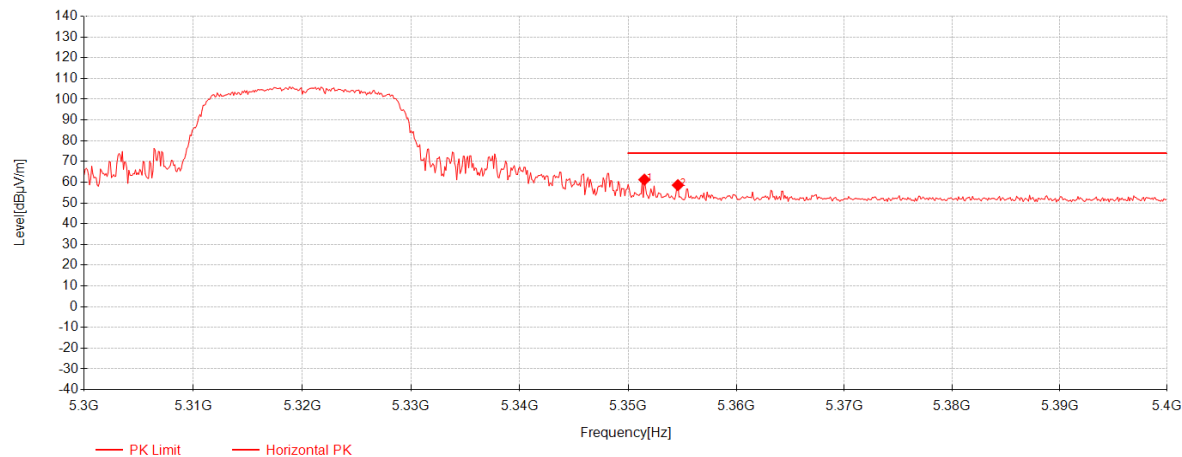

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.5	45.96	33.03	-17.75	61.24	74.00	12.76	Horizontal
2	5354.6	43.32	33.03	-17.76	58.59	74.00	15.41	Horizontal




11ac(VHT20)_TX_CH_64_Horizontal_Average

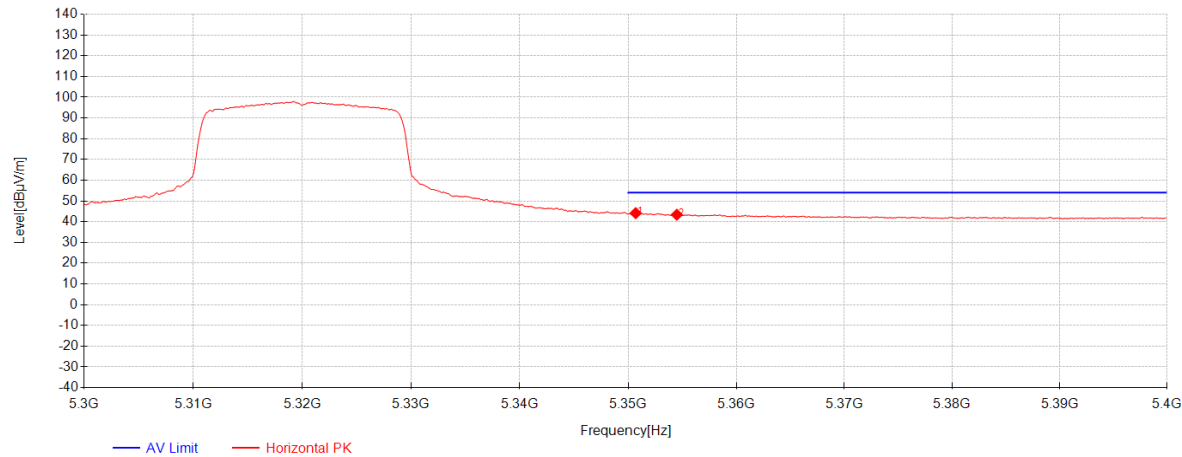

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.7	28.83	33.03	-17.75	44.11	54.00	9.89	Horizontal
2	5354.5	28.11	33.03	-17.76	43.38	54.00	10.62	Horizontal




11ac(VHT20)_TX_CH_64_Vetical_Peak

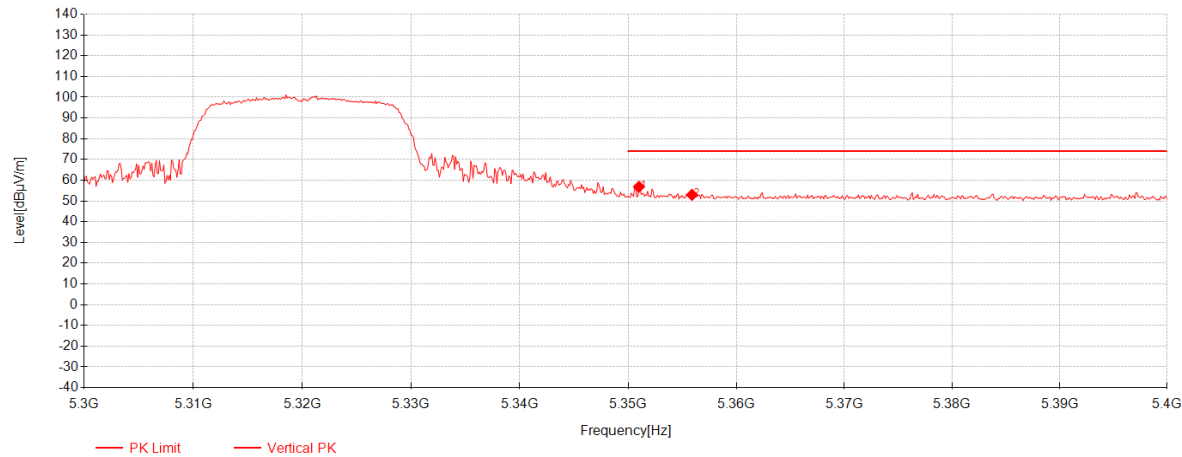


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351	41.57	33.03	-17.75	56.85	74.00	17.15	Vertical
2	5355.9	37.68	33.03	-17.76	52.95	74.00	21.05	Vertical

11ac(VHT20)_TX_CH_64_Vertical_Average

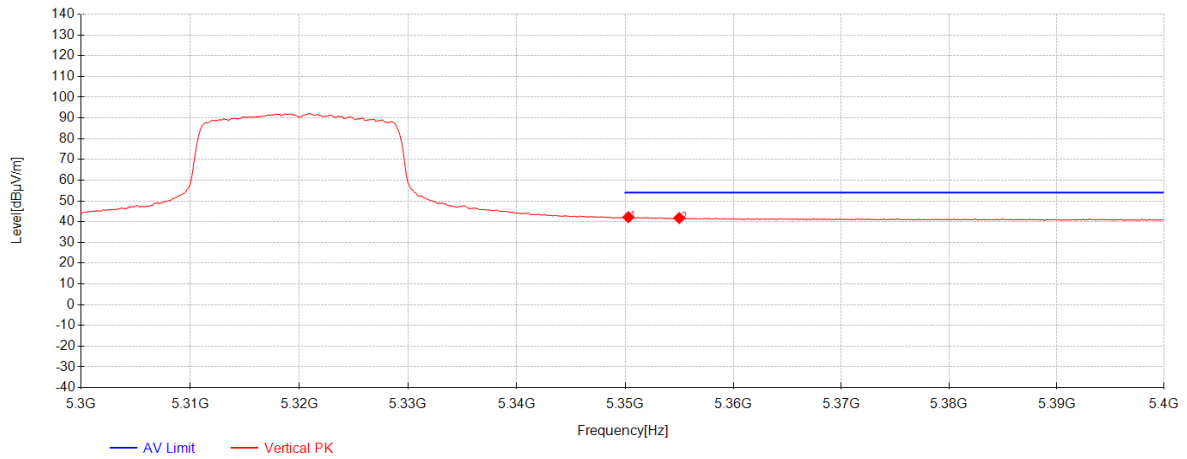

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.3	26.90	33.03	-17.75	42.18	54.00	11.82	Vertical
2	5355	26.51	33.03	-17.76	41.78	54.00	12.22	Vertical


11ac(VHT20)_TX_CH_100_Horizontal_Peak

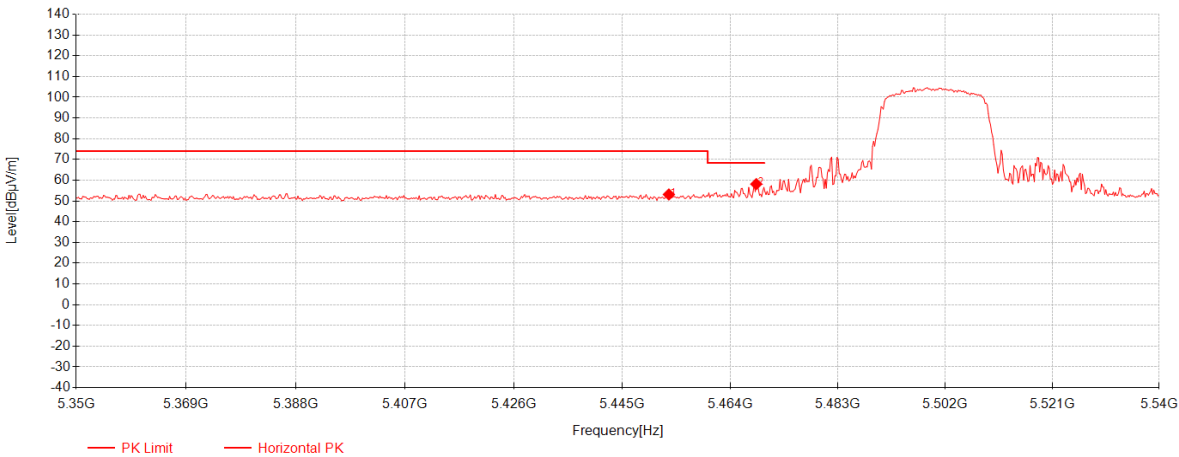

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5453.17	37.78	33.01	-17.66	53.13	74.00	20.87	Horizontal
2	5468.56	42.76	33.01	-17.61	58.15	68.30	10.15	Horizontal




11ac(VHT20)_TX_CH_100_Horizontal_Average

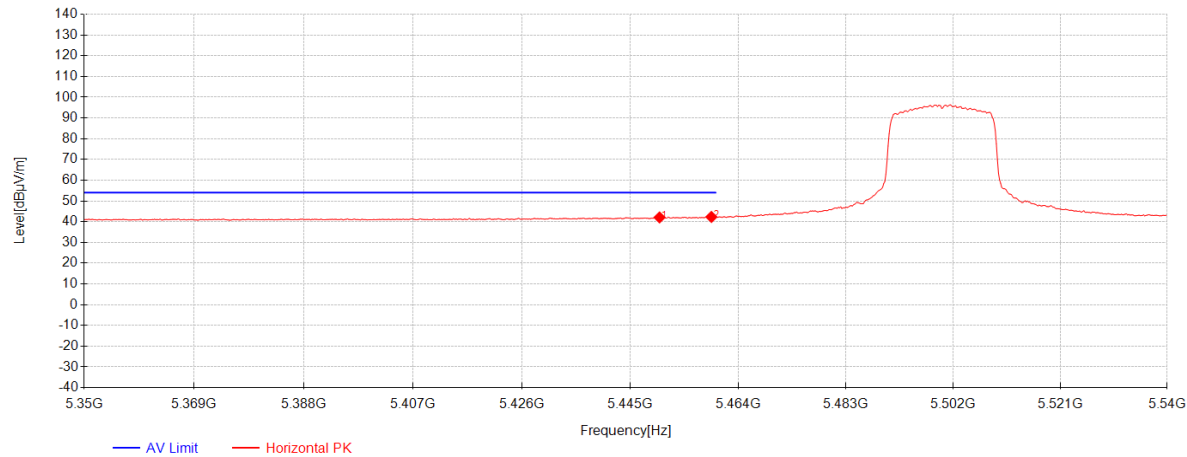

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5450.13	26.71	33.01	-17.67	42.05	54.00	11.95	Horizontal
2	5459.25	26.93	33.01	-17.64	42.30	54.00	11.70	Horizontal


11ac(VHT20)_TX_CH_100_Vertical_Peak

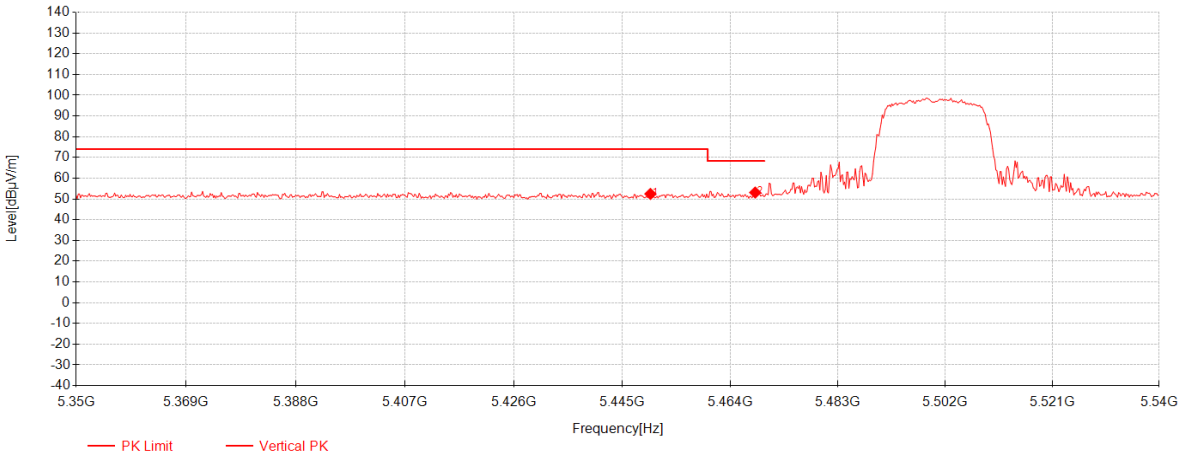

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5449.94	37.09	33.01	-17.67	52.43	74.00	21.57	Vertical
2	5468.37	37.70	33.01	-17.61	53.09	68.30	15.21	Vertical




11ac(VHT20)_TX_CH_100_Veritical_Average

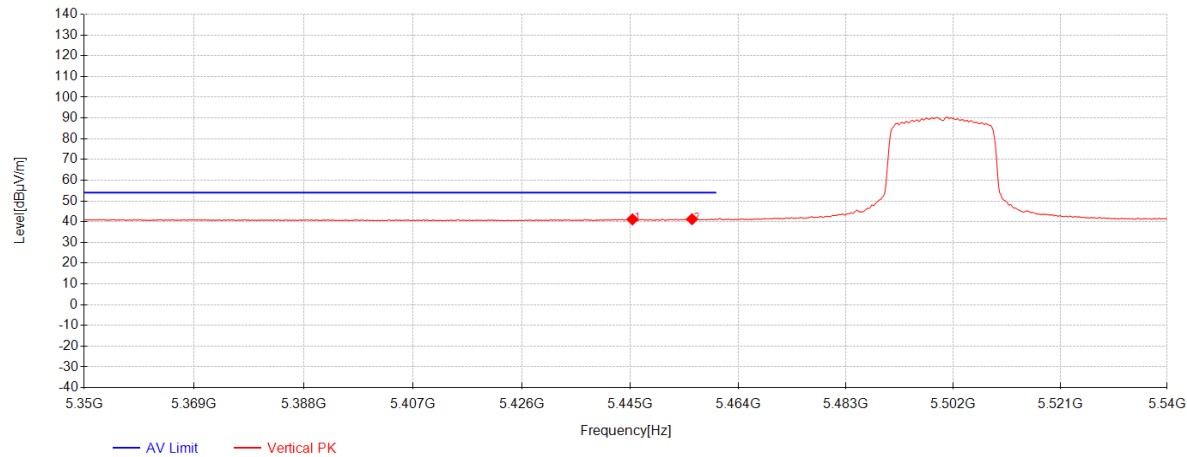

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.38	25.80	33.01	-17.68	41.13	54.00	12.87	Vertical
2	5455.83	25.84	33.01	-17.65	41.20	54.00	12.80	Vertical




11ac(VHT20)_TX_CH_140_Horizontal_Peak

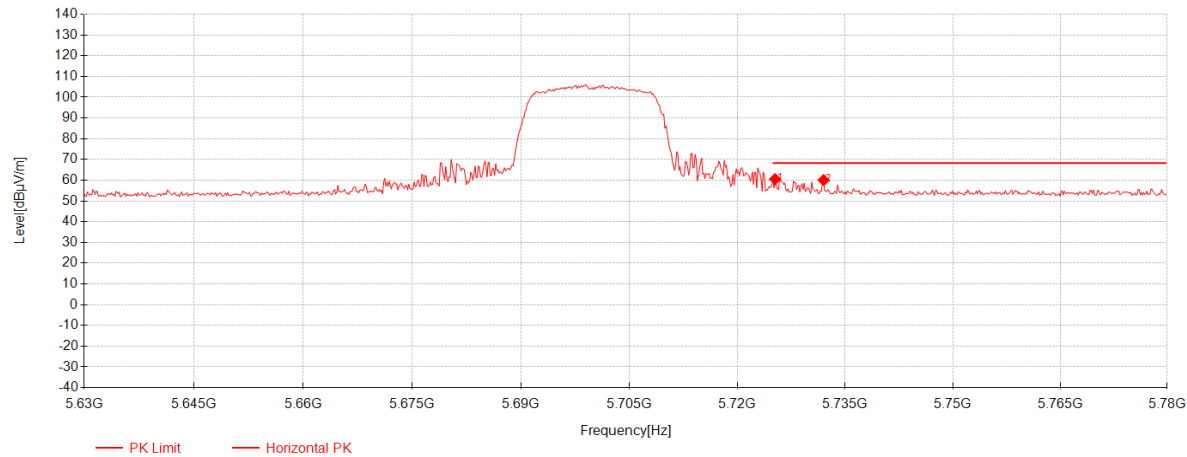

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.25	44.12	33.68	-17.25	60.54	68.20	7.66	Horizontal
2	5732	43.60	33.70	-17.23	60.07	68.20	8.13	Horizontal

11ac(VHT20)_TX_CH_140_Vertical_Peak

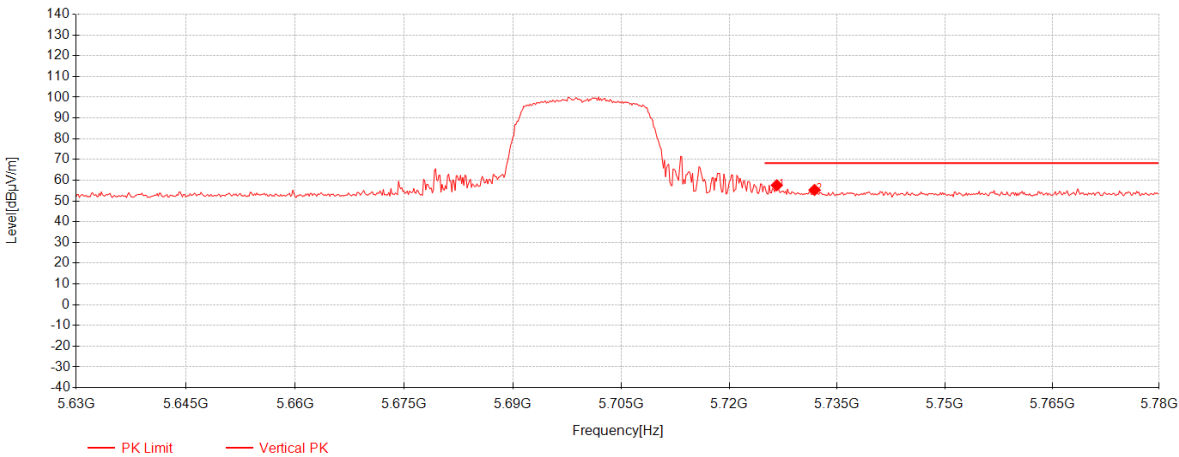

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726.6	41.13	33.68	-17.25	57.56	68.20	10.64	Vertical
2	5731.85	38.86	33.70	-17.23	55.32	68.20	12.88	Vertical