Plots of EUT ceased transmission in the time domain

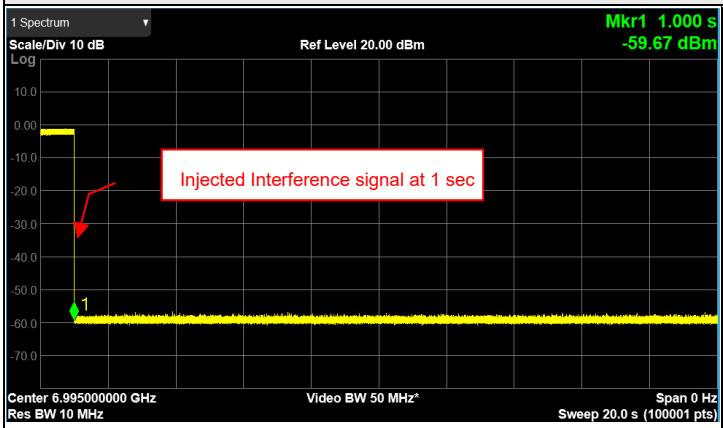

802.11be (EHT20) / CH209

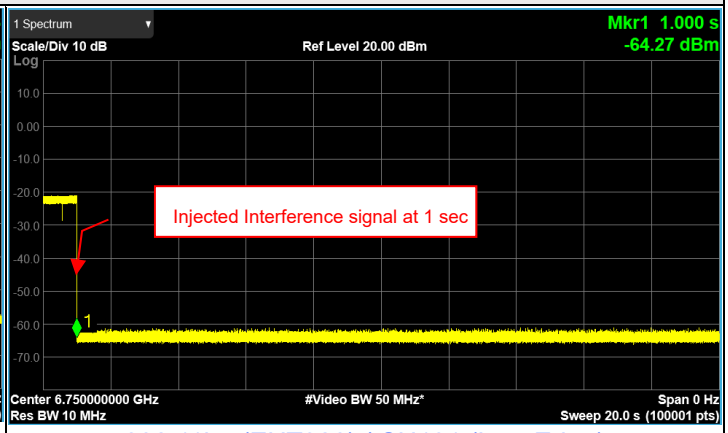

802.11be (EHT320) / CH191 (Low Edge)

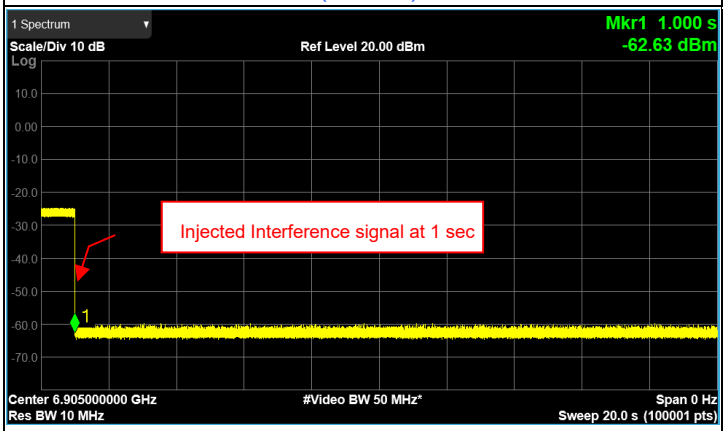

802.11be (EHT320) / CH191 (Middle)

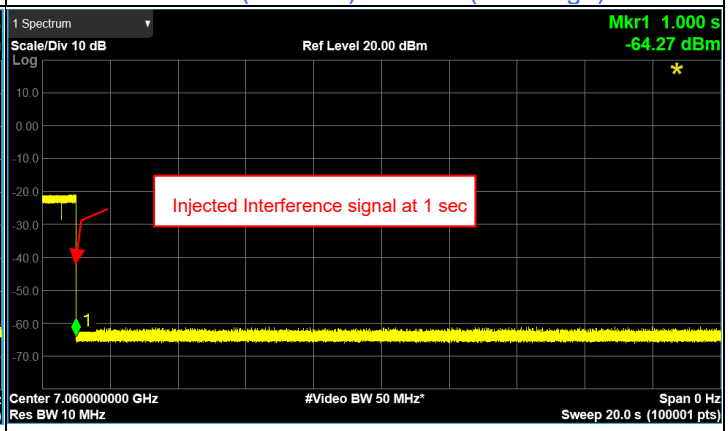

802.11be (EHT320) / CH191 (High Edge)

2T2S

For U-NII-5

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	45	6175	6175	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	31	6105	5950	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6105	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6260	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:

1. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
2. Antenna gain values include all the applicable path losses.
3. After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6175	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	5950	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6105	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6260	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

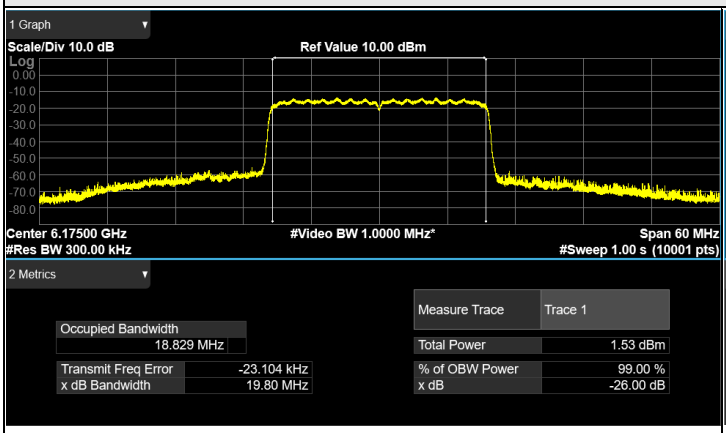

802.11be (EHT20) / CH45

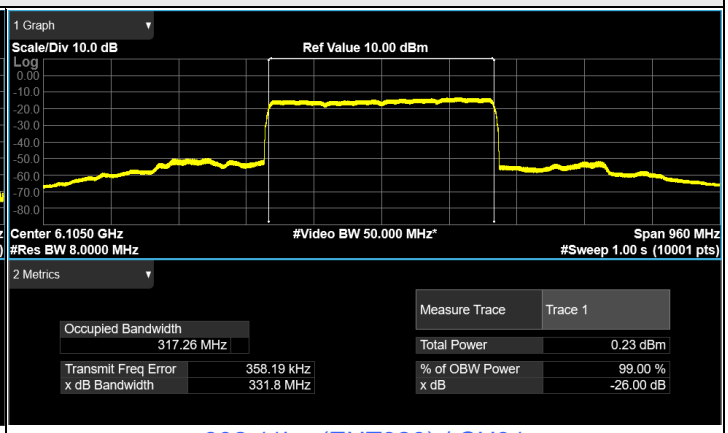

802.11be (EHT320) / CH31

Plots of Injected signal (AWGN) level

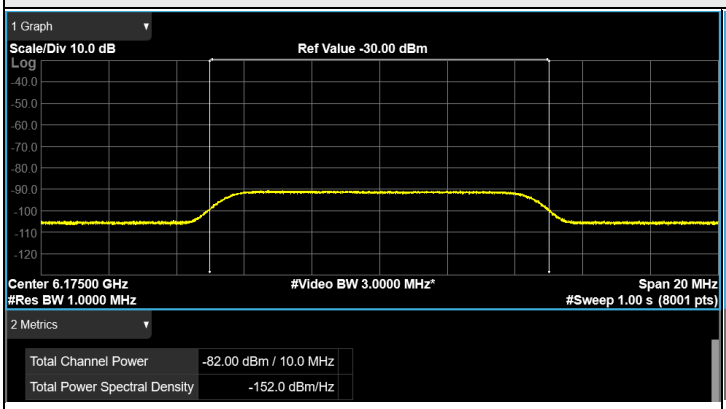

802.11be (EHT20) / CH45

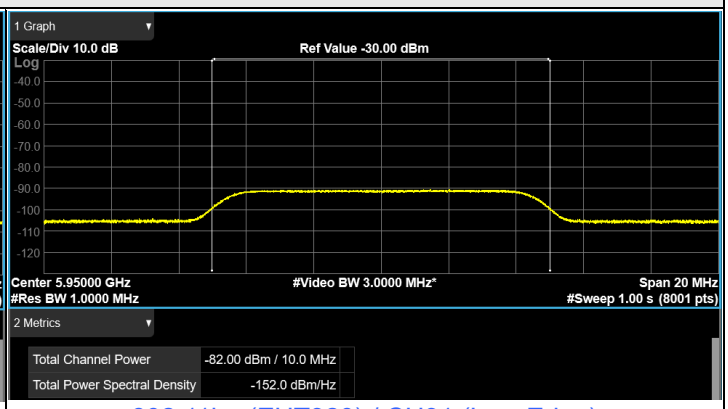

802.11be (EHT320) / CH31 (Low Edge)

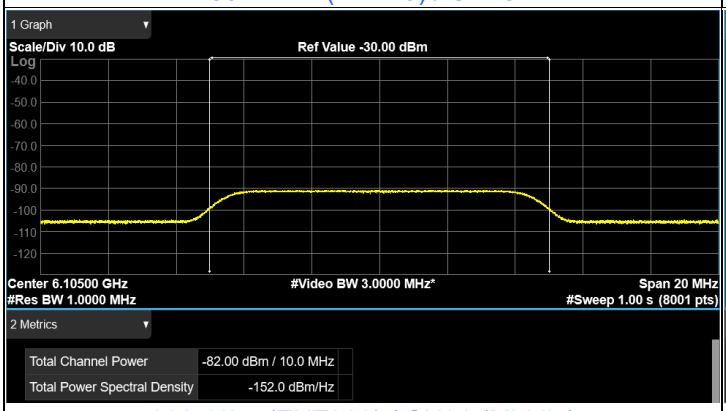

802.11be (EHT320) / CH31 (Middle)

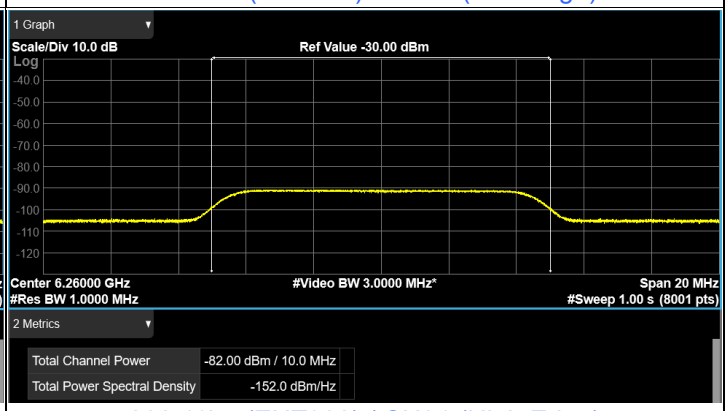

802.11be (EHT320) / CH31 (High Edge)

Plots of EUT ceased transmission in the time domain

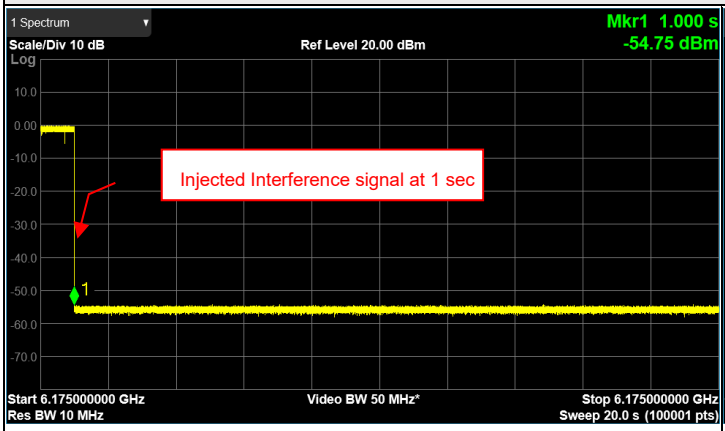

802.11be (EHT20) / CH45

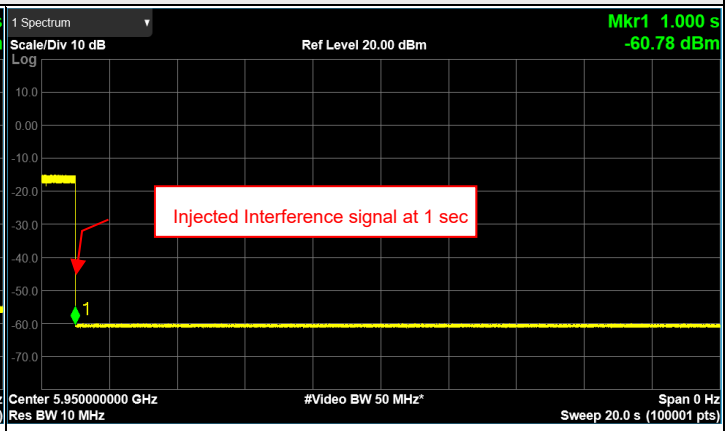

802.11be (EHT320) / CH31 (Low Edge)

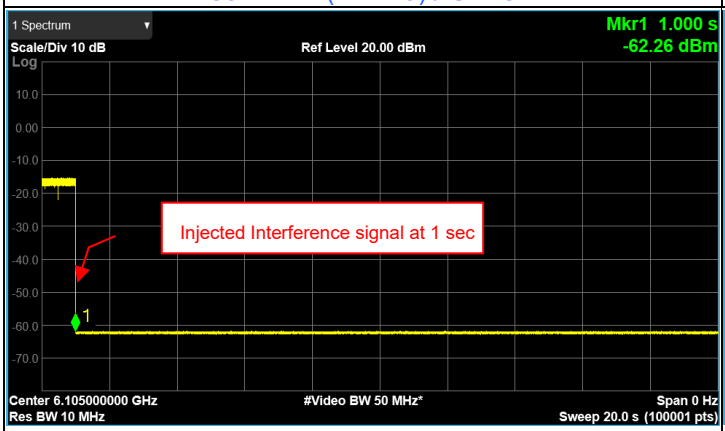

802.11be (EHT320) / CH31 (Middle)

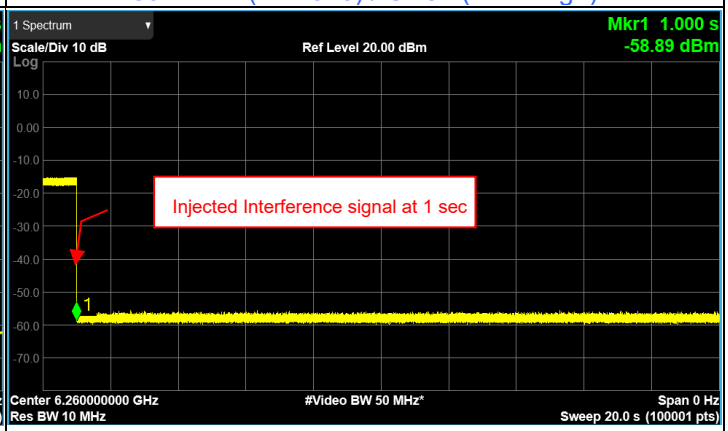

802.11be (EHT320) / CH31 (High Edge)

For U-NII-6

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	105	6475	6475	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	95	6425	6270	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6425	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6580	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:

1. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
2. Antenna gain values include all the applicable path losses.
3. After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6475	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6270	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6425	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

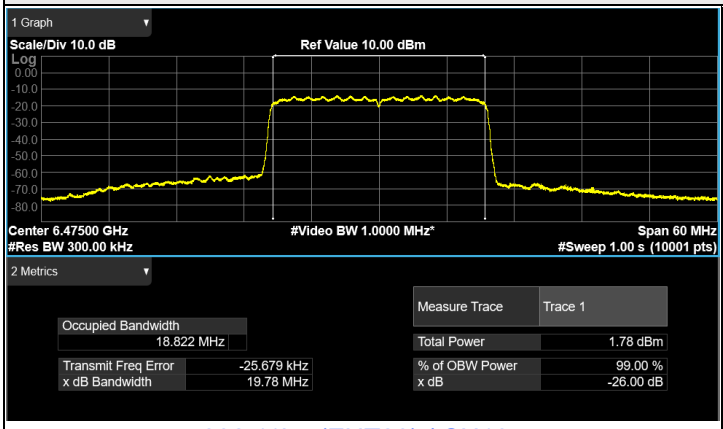

802.11be (EHT20) / CH105

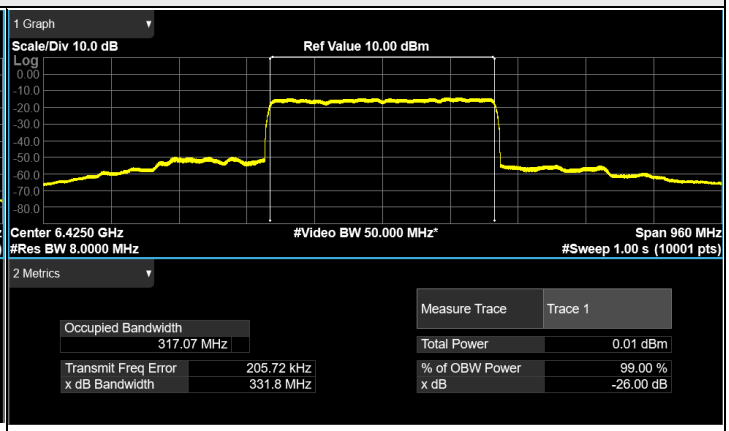

802.11be (EHT320) / CH95

Plots of Injected signal (AWGN) level

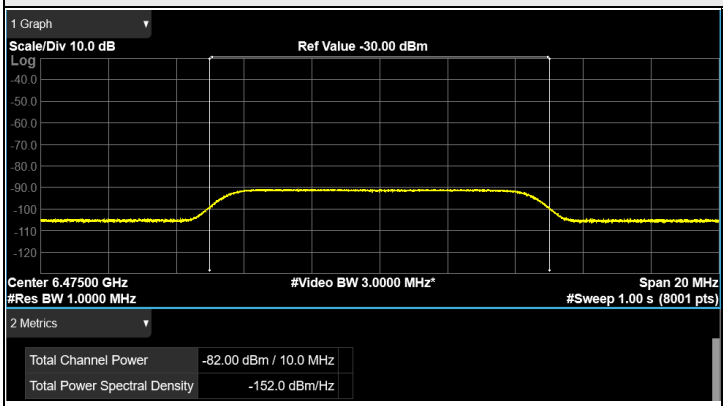

802.11be (EHT20) / CH105

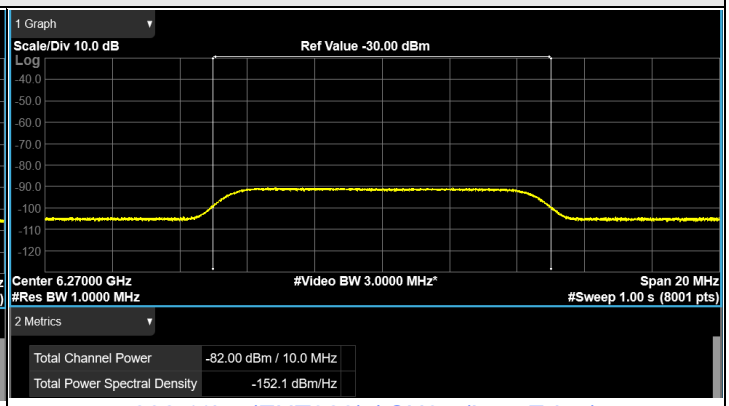

802.11be (EHT320) / CH95 (Low Edge)

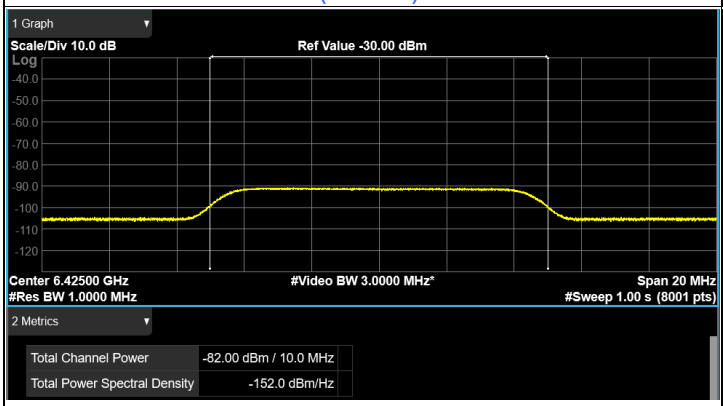

802.11be (EHT320) / CH95 (Middle)

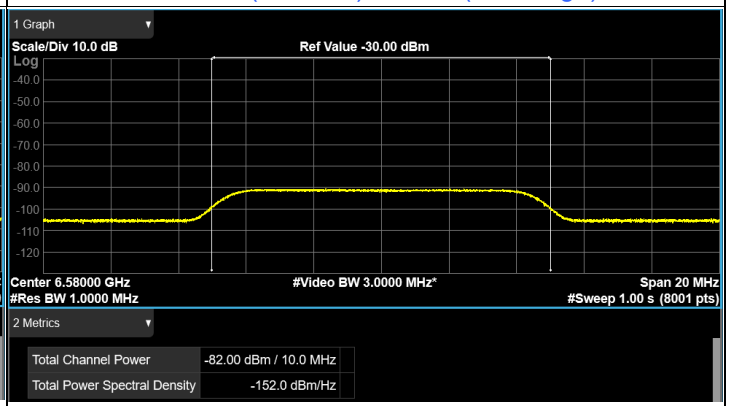

802.11be (EHT320) / CH95 (High Edge)

Plots of EUT ceased transmission in the time domain

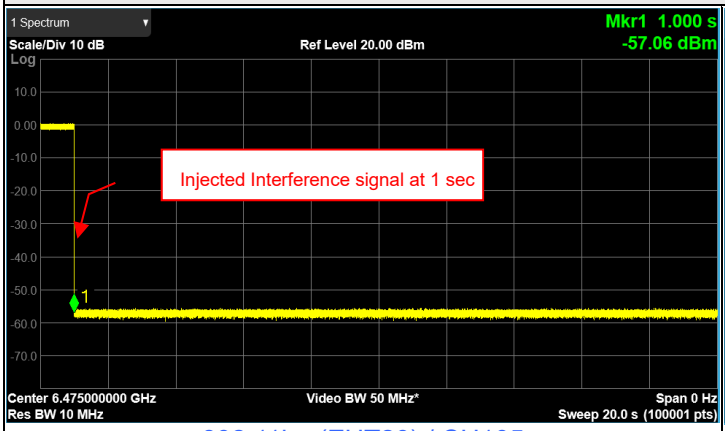

802.11be (EHT20) / CH105

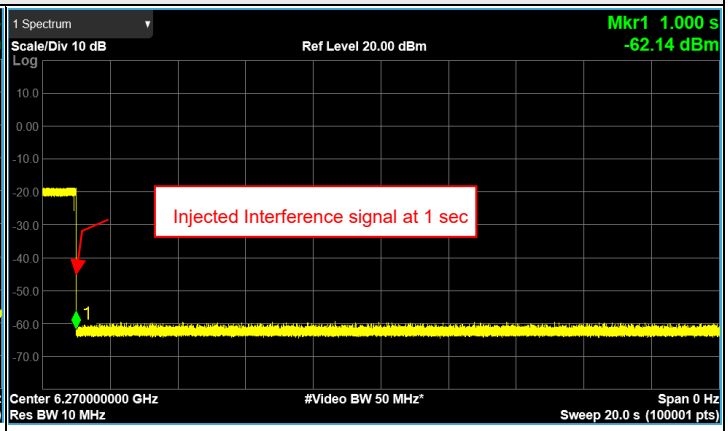

802.11be (EHT320) / CH95 (Low Edge)

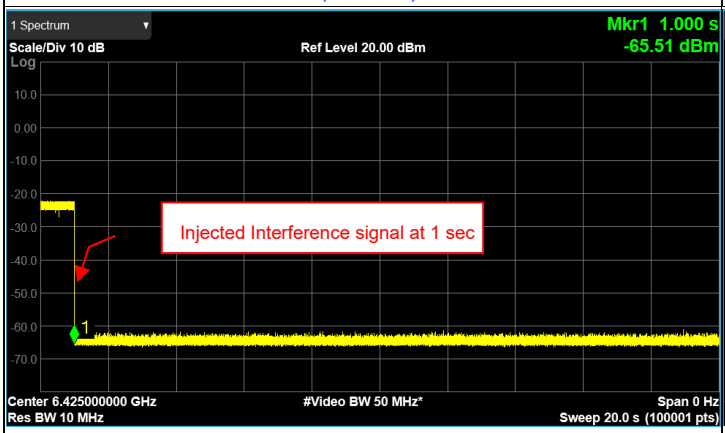

802.11be (EHT320) / CH95 (Middle)

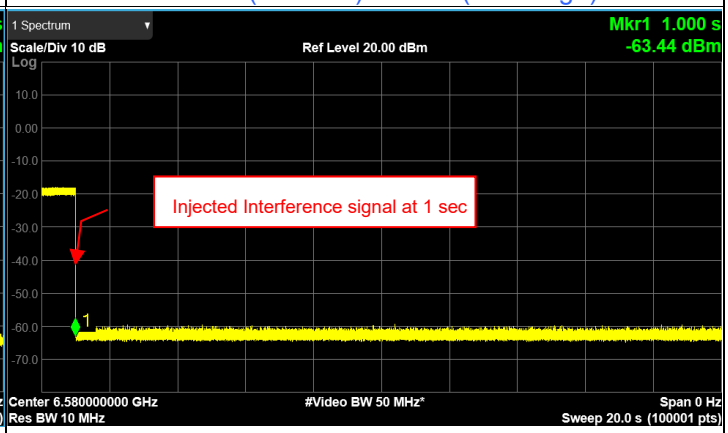

802.11be (EHT320) / CH95 (High Edge)

For U-NII-7

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	159	6745	6590	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6745	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6900	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:

1. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
2. Antenna gain values include all the applicable path losses.
3. After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6745	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6900	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

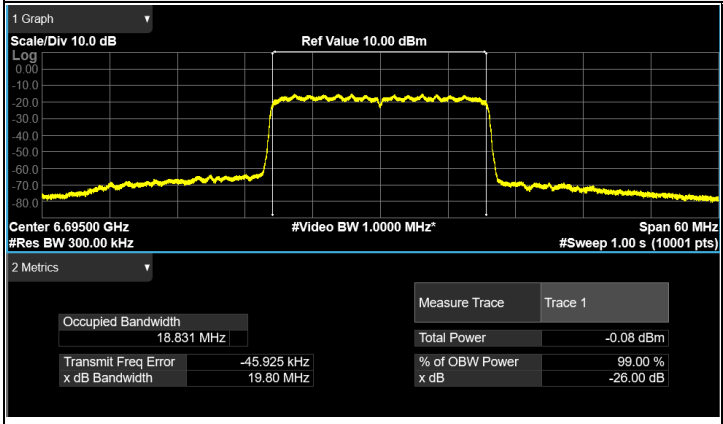

802.11be (EHT20) / CH149

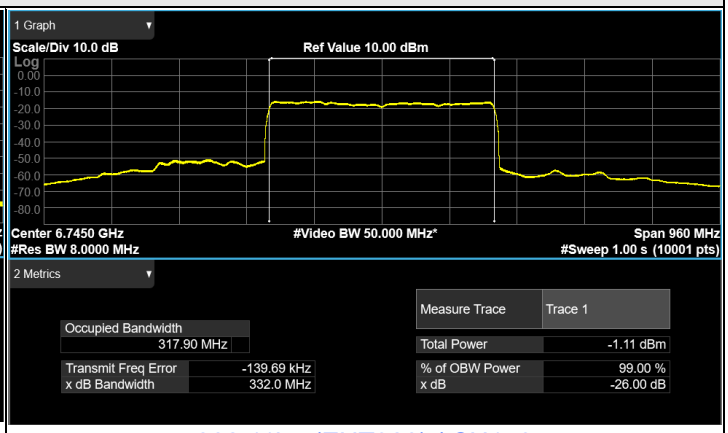

802.11be (EHT320) / CH159

Plots of Injected signal (AWGN) level

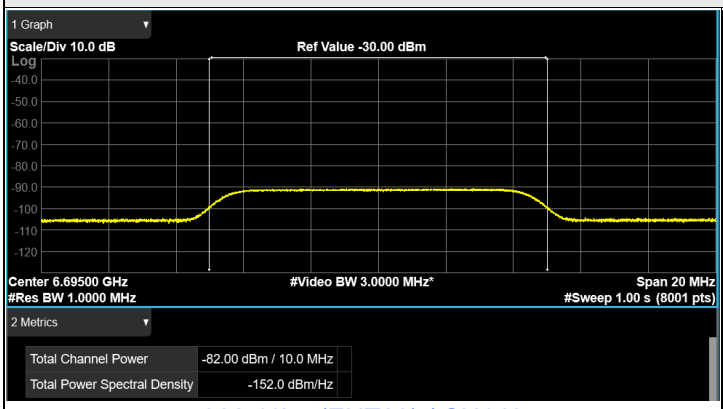

802.11be (EHT20) / CH149

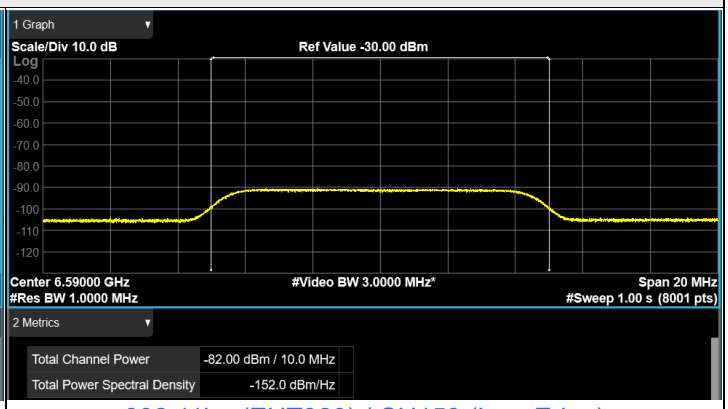

802.11be (EHT320) / CH159 (Low Edge)

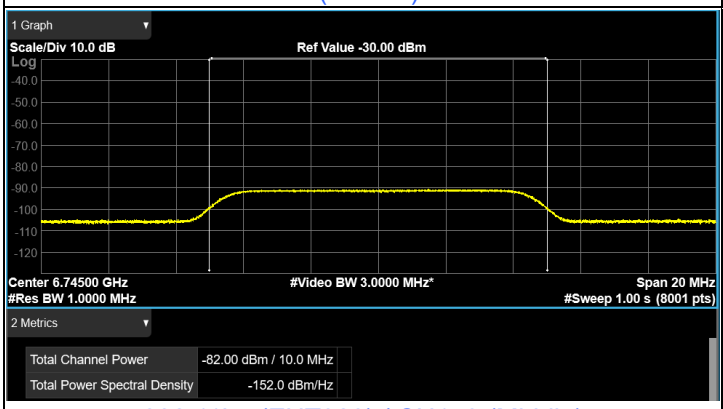

802.11be (EHT320) / CH159 (Middle)

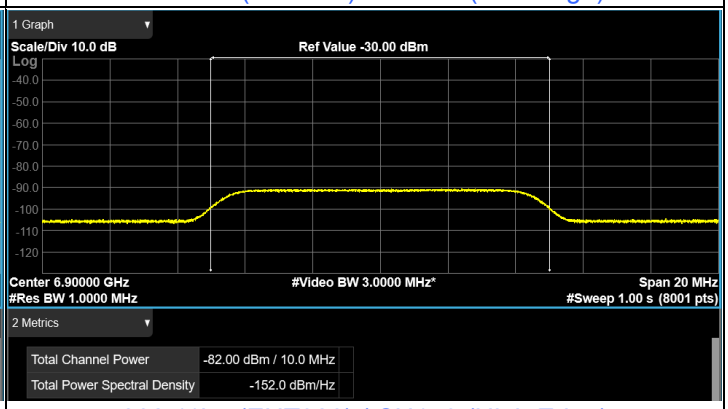

802.11be (EHT320) / CH159 (High Edge)

Plots of EUT ceased transmission in the time domain

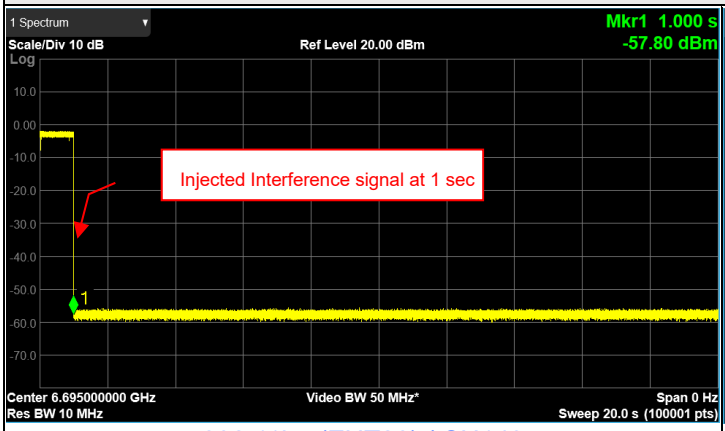

802.11be (EHT20) / CH149

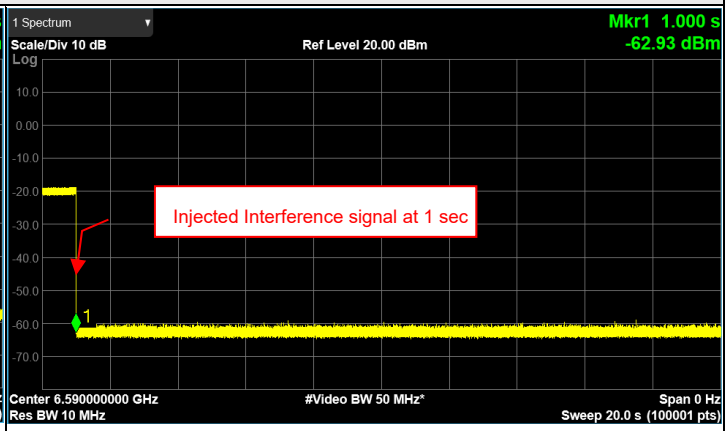

802.11be (EHT320) / CH159 (Low Edge)

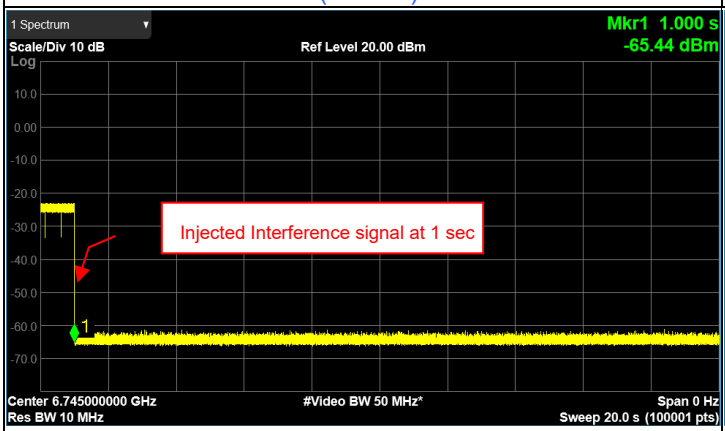

802.11be (EHT320) / CH159 (Middle)

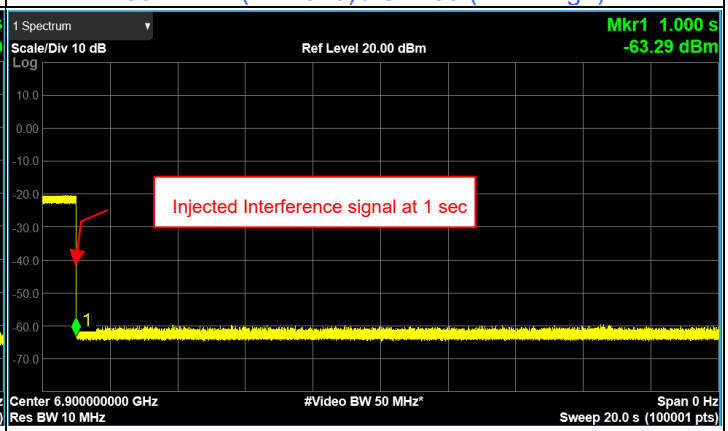

802.11be (EHT320) / CH159 (High Edge)

For U-NII-8

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 2)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
	320	191	6905	6750	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				6905	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON
				7060	-82	-4.99	0	-77.01	-62	OFF
					-82.5	-4.99	0	-77.51	-62	Minimal
					-86.99	-4.99	0	-82	-62	ON

Notes:

1. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
2. Antenna gain values include all the applicable path losses.
3. After evaluation, only the Chain 0 was chosen for test and presented in the test report.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

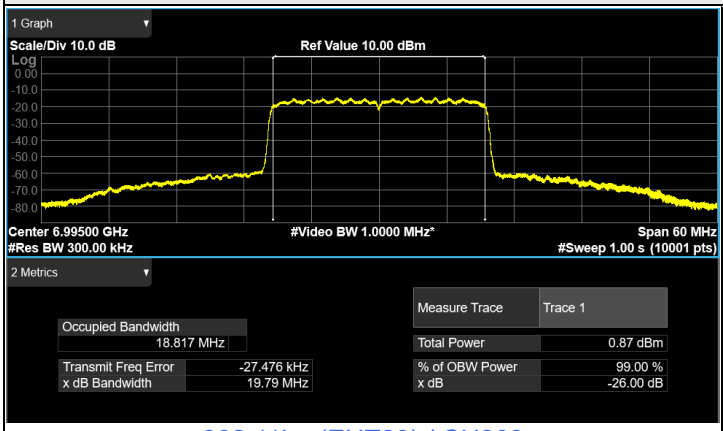

802.11be (EHT20) / CH209

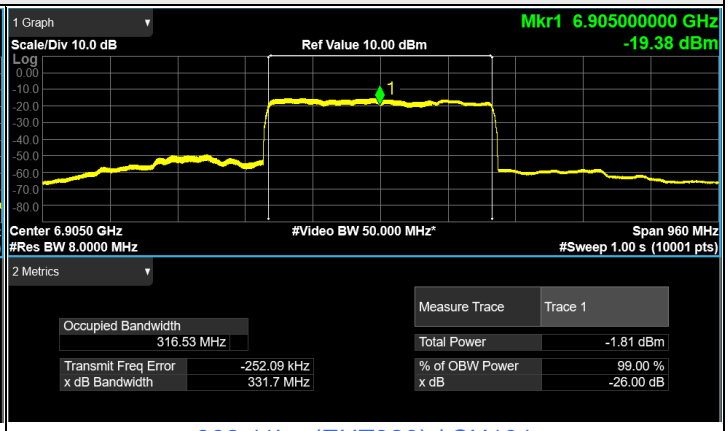

802.11be (EHT320) / CH191

Plots of Injected signal (AWGN) level

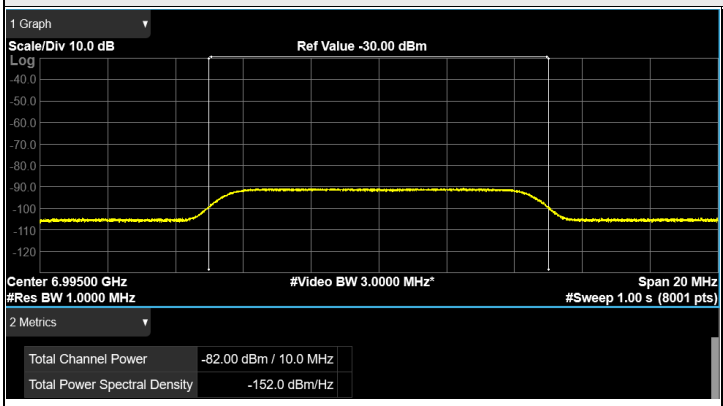

802.11be (EHT20) / CH209

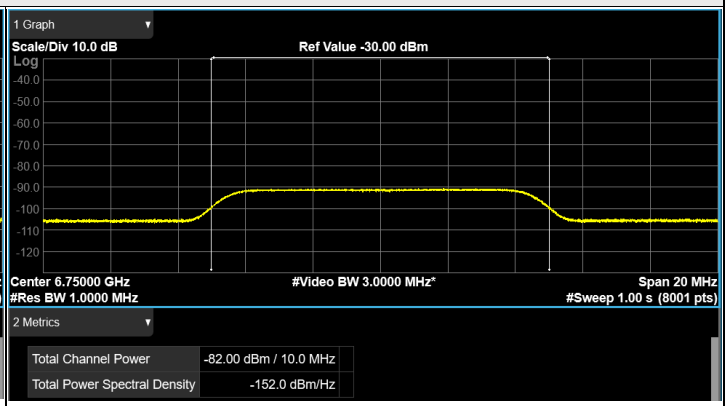

802.11be (EHT320) / CH191 (Low Edge)

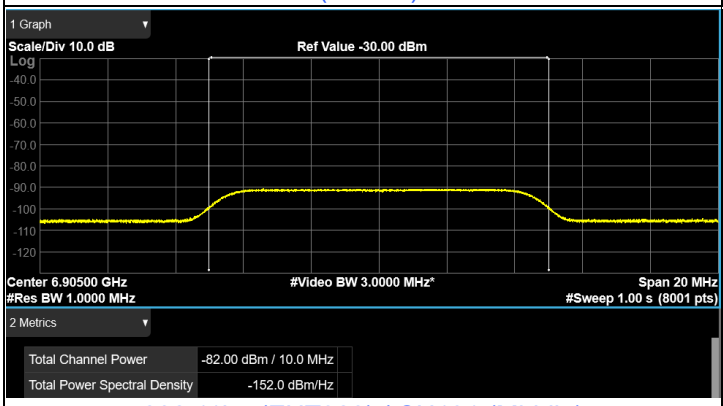

802.11be (EHT320) / CH191 (Middle)

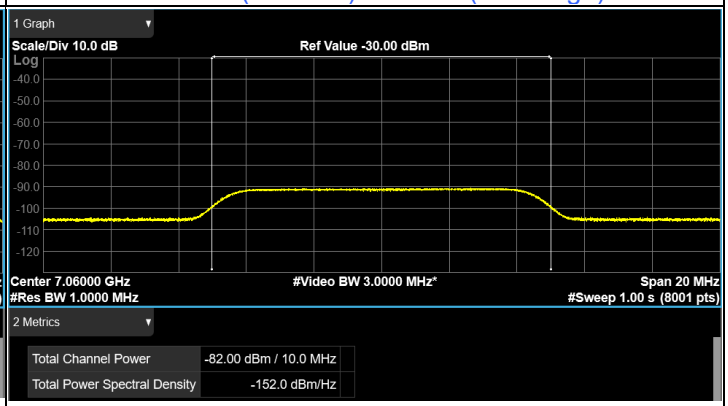

802.11be (EHT320) / CH191 (High Edge)

Plots of EUT ceased transmission in the time domain

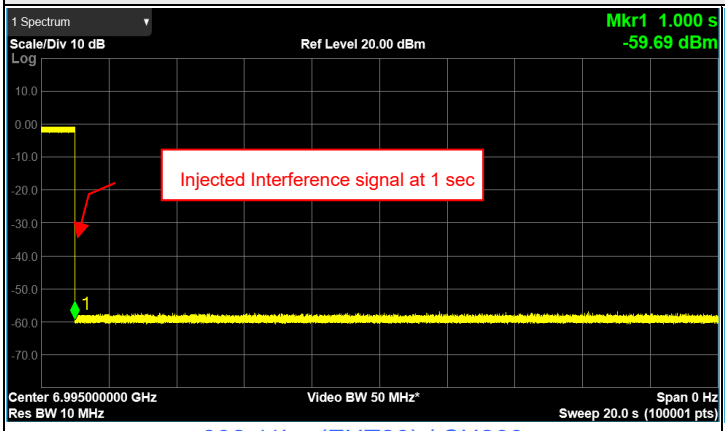

802.11be (EHT20) / CH209

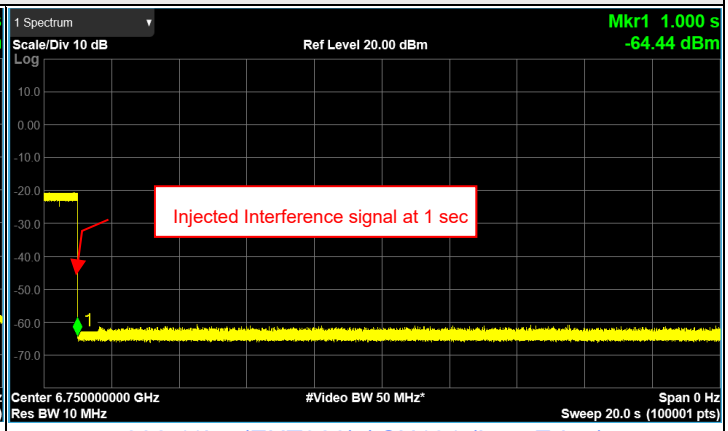

802.11be (EHT320) / CH191 (Low Edge)

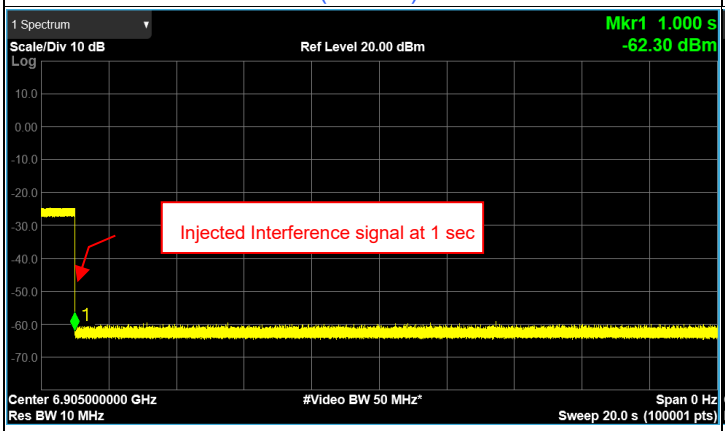

802.11be (EHT320) / CH191 (Middle)

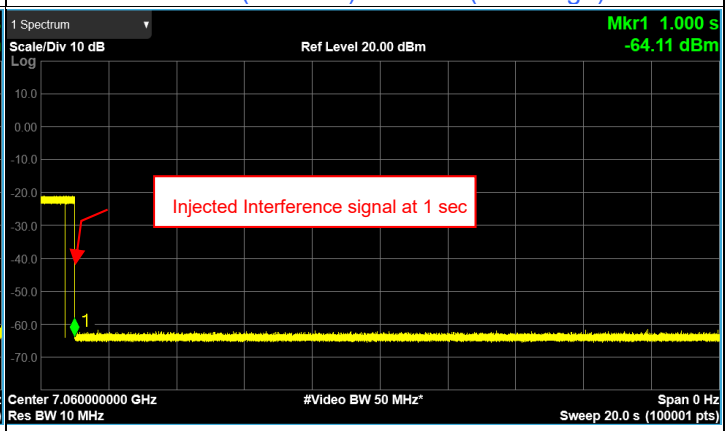

802.11be (EHT320) / CH191 (High Edge)

Verify bandwidth reduction

Plots of EUT ceased transmission in the frequency domain

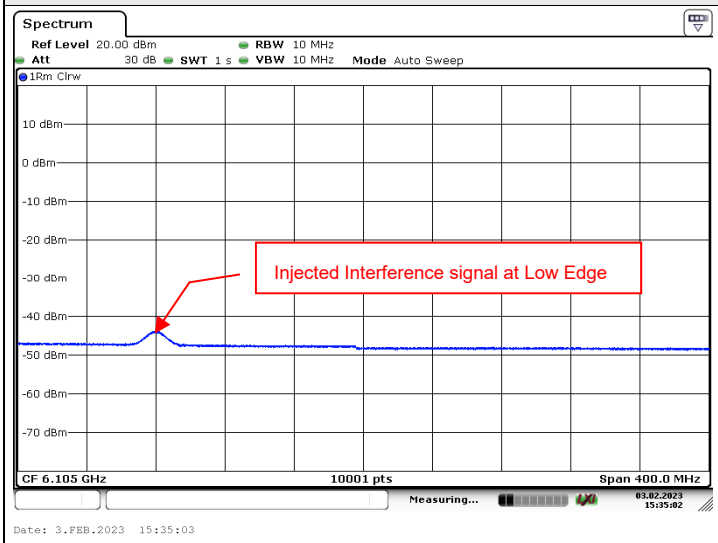

802.11be (EHT320) / CH31 (Low Edge)

A 10 MHz AWGN signal (centered at 5985MHz) is injected.

The channel completely ceases operation.

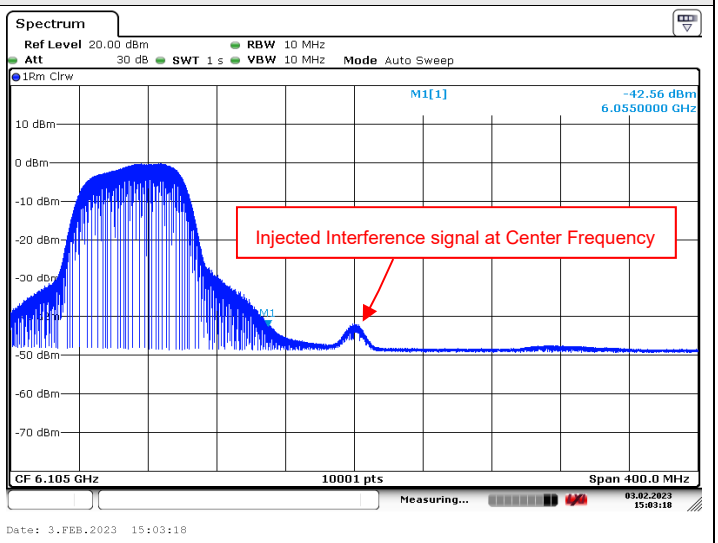

802.11be (EHT320) / CH31 (Middle)

A 10 MHz AWGN signal (centered at 6105 MHz) is injected.

The channel reduces to an 80 MHz channel centered around 5985 MHz.

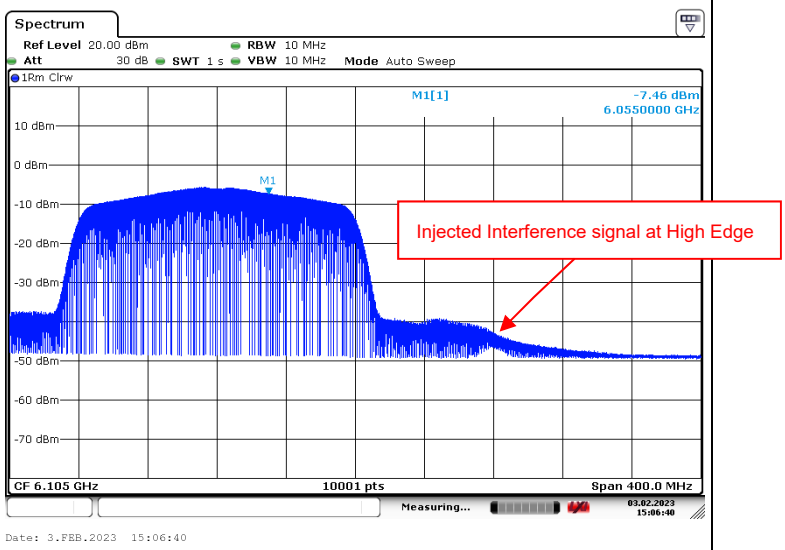

802.11be (EHT320) / CH31 (High Edge)

A 10 MHz AWGN signal (centered at 6185 MHz) is injected.

The channel reduces to a 160 MHz channel centered around 6025 MHz.

7.7 AC Power Conducted Emissions

1T1S

RF Mode	802.11be (EHT) 2x996+484-tone MRU	**Channel**	CH 63：6265 MHz
Frequency Range	150kHz ~ 30MHz	**Detector Function & Resolution Bandwidth**	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	24°C, 63% RH
Tested By	Tom Yang		

Phase Of Power : Line (L)										
No	**Frequency (MHz)**	**Correction Factor (dB)**	**Reading Value (dBuV)**		**Emission Level (dBuV)**		**Limit (dBuV)**		**Margin (dB)**	
			Q.P.	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**
1	0.15538	9.96	39.76	20.23	49.72	30.19	65.71	55.71	-15.99	-25.52
2	0.22494	9.96	39.15	22.76	49.11	32.72	62.63	52.63	-13.52	-19.91
3	0.42143	9.97	16.56	2.79	26.53	12.76	57.42	47.42	-30.89	-34.66
4	3.49072	10.12	21.83	15.32	31.95	25.44	56.00	46.00	-24.05	-20.56
5	15.31529	10.82	15.73	5.46	26.55	16.28	60.00	50.00	-33.45	-33.72
6	23.61055	11.16	29.63	27.57	40.79	38.73	60.00	50.00	-19.21	-11.27

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

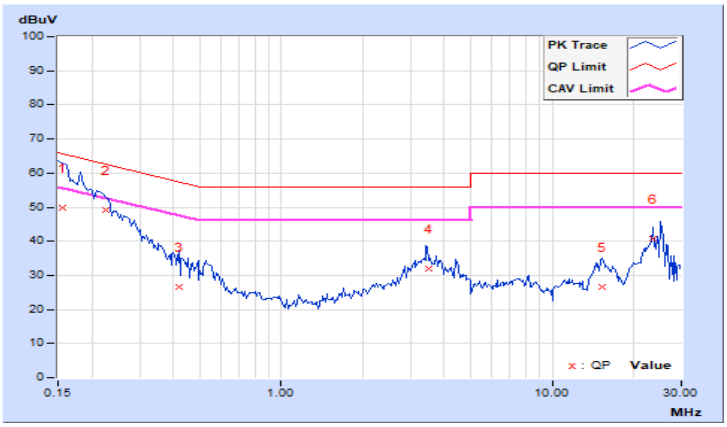

RF Mode	802.11be (EHT) 2x996+484-tone MRU	**Channel**	CH 63：6265 MHz
Frequency Range	150kHz ~ 30MHz	**Detector Function & Resolution Bandwidth**	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	23°C, 68% RH
Tested By	Tom Yang		

Phase Of Power : Neutral (N)										
No	**Frequency (MHz)**	**Correction Factor (dB)**	**Reading Value (dBuV)**		**Emission Level (dBuV)**		**Limit (dBuV)**		**Margin (dB)**	
			Q.P.	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**
1	**0.15199**	**9.93**	**49.61**	**27.07**	**59.54**	**37.00**	**65.89**	**55.89**	**-6.35**	**-18.89**
2	0.20195	9.94	41.82	20.43	51.76	30.37	63.53	53.53	-11.77	-23.16
3	0.46792	9.94	17.37	1.59	27.31	11.53	56.55	46.55	-29.24	-35.02
4	3.46299	10.08	22.53	15.54	32.61	25.62	56.00	46.00	-23.39	-20.38
5	14.92896	10.60	17.37	8.11	27.97	18.71	60.00	50.00	-32.03	-31.29
6	25.12353	10.86	31.47	27.96	42.33	38.82	60.00	50.00	-17.67	-11.18

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

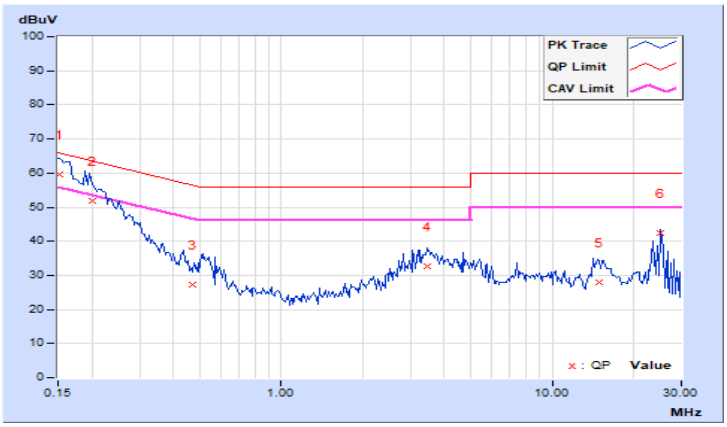

2T2S

RF Mode	802.11be (EHT) 3x996+484-tone MRU	**Channel**	CH 31：6105 MHz
Frequency Range	150 kHz ~ 30 MHz	**Detector Function & Resolution Bandwidth**	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	24°C, 63% RH
Tested By	Tom Yang		

Phase Of Power : Line (L)										
No	**Frequency (MHz)**	**Correction Factor (dB)**	**Reading Value (dBuV)**		**Emission Level (dBuV)**		**Limit (dBuV)**		**Margin (dB)**	
			Q.P.	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**
1	0.15033	9.96	48.62	28.71	58.58	38.67	65.98	55.98	-7.40	-17.31
2	0.24092	9.96	35.45	13.37	45.41	23.33	62.06	52.06	-16.65	-28.73
3	0.53719	9.98	18.82	3.54	28.80	13.52	56.00	46.00	-27.20	-32.48
4	3.67699	10.13	22.64	14.52	32.77	24.65	56.00	46.00	-23.23	-21.35
5	15.45271	10.83	16.55	5.68	27.38	16.51	60.00	50.00	-32.62	-33.49
6	24.99015	11.18	23.26	14.58	34.44	25.76	60.00	50.00	-25.56	-24.24

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

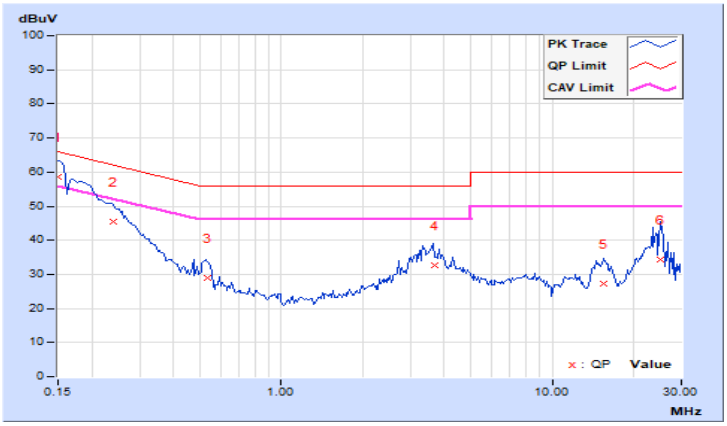

RF Mode	802.11be (EHT) 3x996+484-tone MRU	**Channel**	CH 31：6105 MHz
Frequency Range	150 kHz ~ 30 MHz	**Detector Function & Resolution Bandwidth**	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	24°C, 63% RH
Tested By	Tom Yang		

Phase Of Power : Neutral (N)										
No	**Frequency (MHz)**	**Correction Factor (dB)**	**Reading Value (dBuV)**		**Emission Level (dBuV)**		**Limit (dBuV)**		**Margin (dB)**	
			Q.P.	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**	**Q.P.**	**AV.**
1	0.15000	9.93	41.53	18.72	51.46	28.65	66.00	56.00	-14.54	-27.35
2	0.25762	9.94	32.51	12.93	42.45	22.87	61.51	51.51	-19.06	-28.64
3	0.53154	9.95	16.43	2.99	26.38	12.94	56.00	46.00	-29.62	-33.06
4	3.50197	10.08	21.52	15.19	31.60	25.27	56.00	46.00	-24.40	-20.73
5	14.70154	10.59	17.61	7.83	28.20	18.42	60.00	50.00	-31.80	-31.58
6	25.13411	10.86	30.79	27.43	41.65	38.29	60.00	50.00	-18.35	-11.71

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

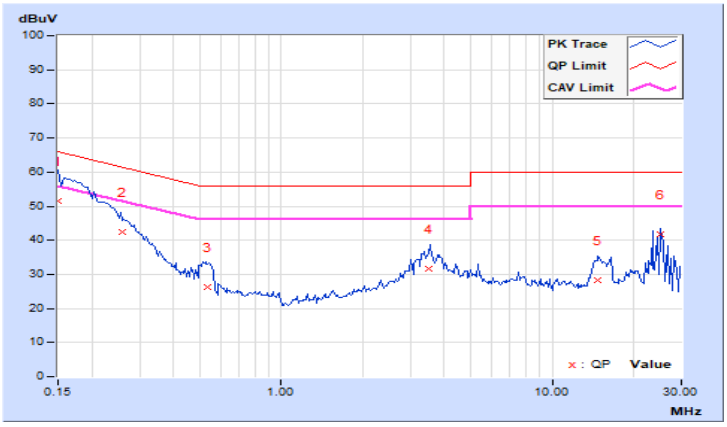

7.8 Unwanted Emissions below 1 GHz

Radiated versus Conducted Measurement
For Radiated measurement: The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) For Conducted measurement: The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Emission Convert Formula
a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8 d = measurement distance in 3 meters. b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB) c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. For the band edge the gain for the specific band may have been used. Notes: 1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For f = 30 – 1000 MHz, add 4.7 dB. 2. The conducted emission test was considered some factor to compute test result.

1T1S

Mode A
320 MHz Preamble 802.11be (RU996*2+484) - Channel 63

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	30.36	24.82	40	-15.18	-75.2	4.76	-70.44
2	150.4	23.42	43.5	-20.08	-76.6	4.76	-71.84
3	231.03	22.61	46	-23.39	-77.41	4.76	-72.65
4	531	23.55	46	-22.45	-76.47	4.76	-71.71
5	752.77	23.72	46	-22.28	-76.3	4.76	-71.54
6	895.48	24.37	46	-21.63	-75.65	4.76	-70.89

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

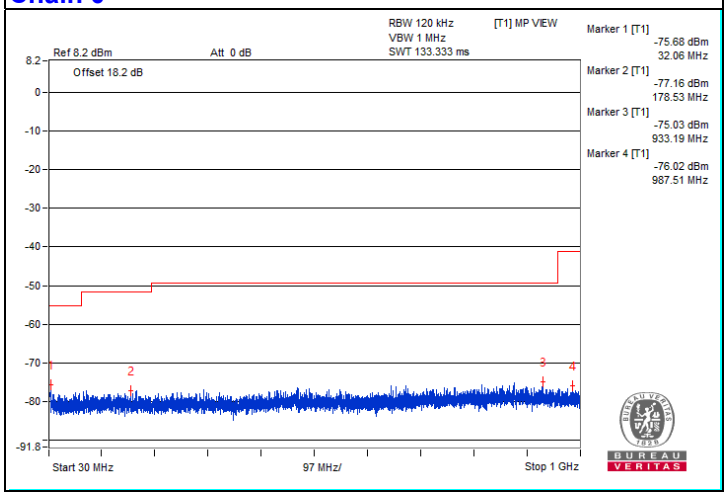

Mode B

RF Mode	802.11be (EHT) 2x996+484-tone MRU	**Channel**	CH 63：6265 MHz
Frequency Range	30 MHz ~ 1 GHz	**Detector Function & Bandwidth**	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	50.04	22.6 QP	40.0	-17.4	1.00 H	253	35.1	-12.5
2	198.71	39.3 QP	43.5	-4.2	1.00 H	154	54.3	-15.0
3	299.17	42.3 QP	46.0	-3.7	1.50 H	319	53.1	-10.8
4	398.53	33.1 QP	46.0	-12.9	1.50 H	199	41.0	-7.9
5	698.14	40.0 QP	46.0	-6.0	2.00 H	134	40.7	-0.7
6	**897.89**	**43.0 QP**	**46.0**	**-3.0**	**1.50 H**	**98**	**39.8**	**3.2**

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

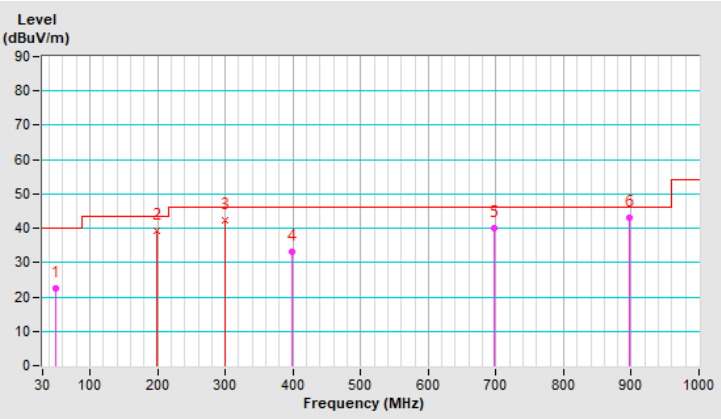

RF Mode	802.11be (EHT) 2x996+484-tone MRU	**Channel**	CH 63：6265 MHz
Frequency Range	30 MHz ~ 1 GHz	**Detector Function & Bandwidth**	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	199.97	34.7 QP	43.5	-8.8	1.00 V	118	49.7	-15.0
2	298.21	38.9 QP	46.0	-7.1	1.00 V	82	49.7	-10.8
3	400.02	29.9 QP	46.0	-16.1	1.50 V	157	37.8	-7.9
4	533.14	27.8 QP	46.0	-18.2	1.00 V	168	32.2	-4.4
5	697.94	33.3 QP	46.0	-12.7	2.00 V	35	34.0	-0.7
6	898.57	39.9 QP	46.0	-6.1	1.00 V	96	36.7	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

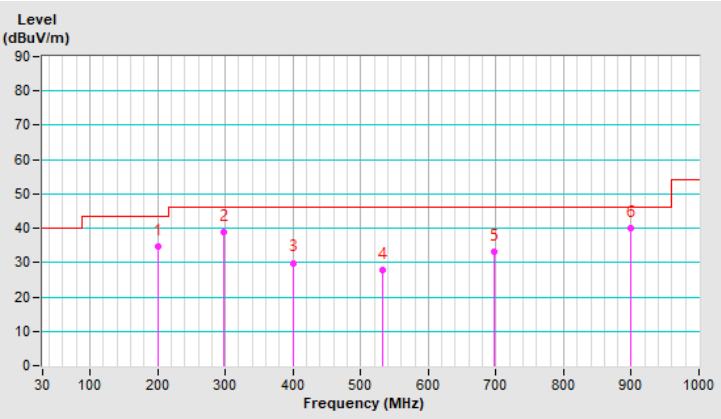

2T2S

Mode A

320 MHz Preamble 802.11be (RU996*3+484) - Channel 31

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	32.06	26.64	40	-13.36	-76.75	-76.06	4.76	-68.62
2	137.79	25.09	43.5	-18.41	-77.83	-78.05	4.76	-70.17
3	298.69	25.01	46	-20.99	-78.35	-77.71	4.76	-70.25
4	495.96	26.08	46	-19.92	-78.49	-75.82	4.76	-69.18
5	786.23	26	46	-20	-77.32	-76.76	4.76	-69.26
6	955.98	26.68	46	-19.32	-78.32	-75	4.76	-68.58

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

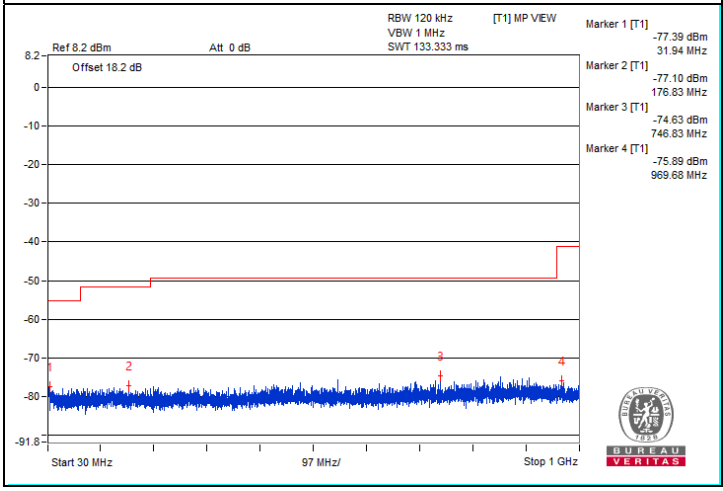

Chain 1

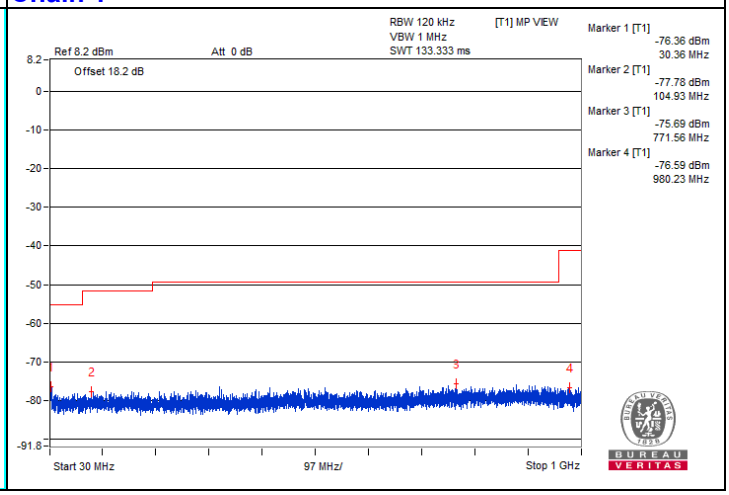

Mode B

RF Mode	802.11be (EHT) 3x996+484-tone MRU	Channel	CH 31：6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.47	24.5 QP	43.5	-19.0	1.50 H	131	41.2	-16.7
2	199.53	40.2 QP	43.5	-3.3	1.50 H	192	55.2	-15.0
3	299.00	42.2 QP	46.0	-3.8	1.00 H	9	53.0	-10.8
4	398.74	32.3 QP	46.0	-13.7	1.00 H	214	40.2	-7.9
5	698.95	40.3 QP	46.0	-5.7	1.00 H	55	41.0	-0.7
6	898.54	42.4 QP	46.0	-3.6	1.50 H	153	39.2	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

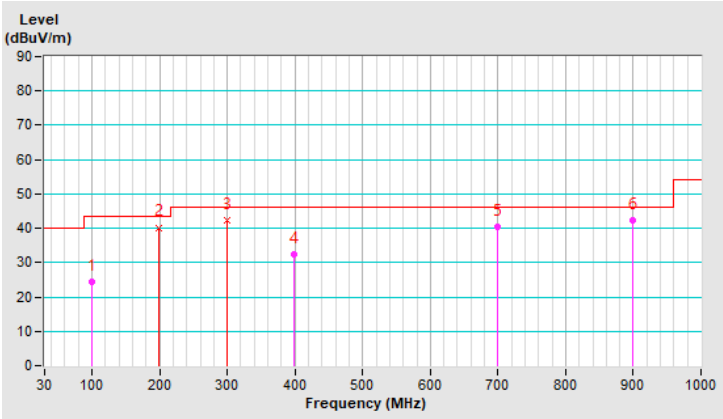

RF Mode	802.11be (EHT) 3x996+484-tone MRU	**Channel**	CH 31：6105 MHz
Frequency Range	30 MHz ~ 1 GHz	**Detector Function & Bandwidth**	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	38.71	23.2 QP	40.0	-16.8	1.00 V	339	36.2	-13.0
2	199.37	34.5 QP	43.5	-9.0	1.50 V	132	49.5	-15.0
3	299.00	39.2 QP	46.0	-6.8	2.00 V	69	50.0	-10.8
4	398.64	30.3 QP	46.0	-15.7	1.50 V	184	38.2	-7.9
5	698.12	34.7 QP	46.0	-11.3	1.00 V	11	35.4	-0.7
6	898.33	40.3 QP	46.0	-5.7	1.50 V	154	37.1	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

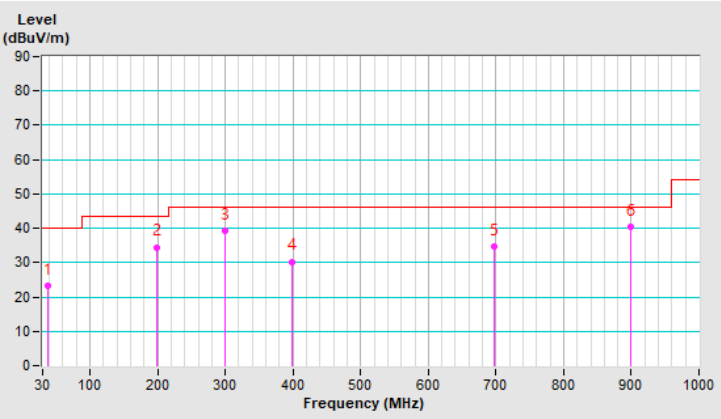

7.9 Unwanted Emissions above 1 GHz

Radiated versus Conducted Measurement
For Radiated measurement: The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) For Conducted measurement: The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Emission Convert Formula
a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8 d = measurement distance in 3 meters. b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB) c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. For the band edge the gain for the specific band may have been used. Notes: 1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For f = 30 – 1000 MHz, add 4.7 dB. 2. The conducted emission test was considered some factor to compute test result.

Mode A

1T1S

20 MHz Preamble 802.11ax (RU26) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11901.56	43.33 PK	74	-30.67	-56.69	4.76	-51.93
2	11901.56	32.62 AV	54	-21.38	-67.4	4.76	-62.64
3	17871.43	43.78 PK	74	-30.22	-56.24	4.76	-51.48
4	17859.93	33.58 AV	54	-20.42	-66.44	4.76	-61.68

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

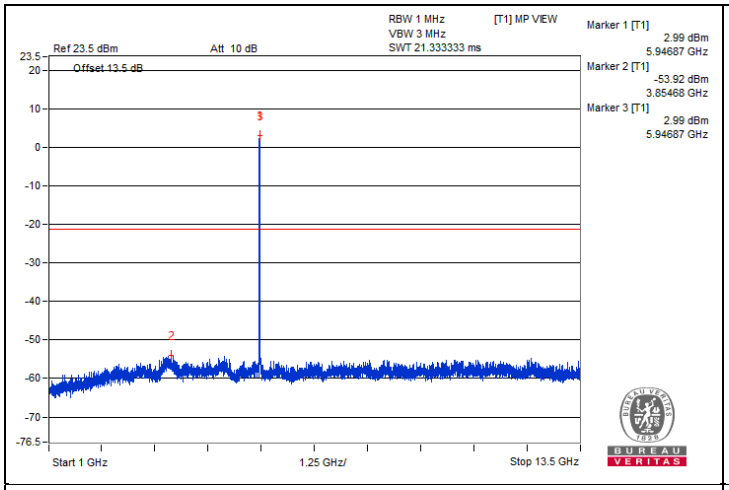
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
2.99 dBm
5.94687 GHz
Marker 2 [T1]
-53.92 dBm
3.85468 GHz
Marker 3 [T1]
2.99 dBm
5.94687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

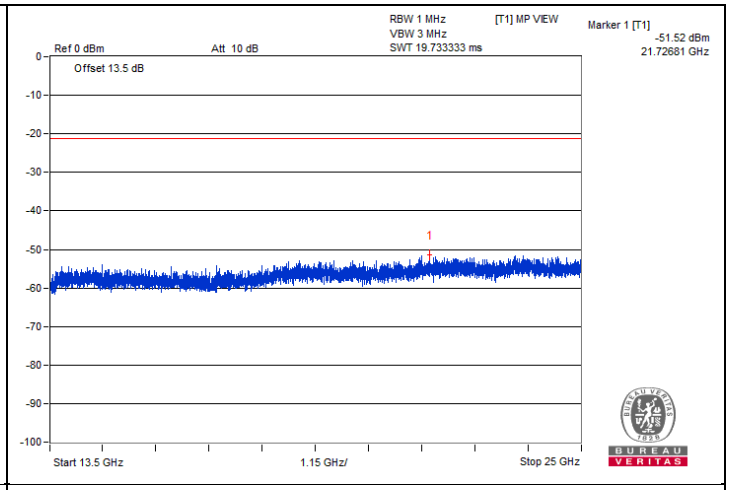
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.52 dBm
21.72681 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

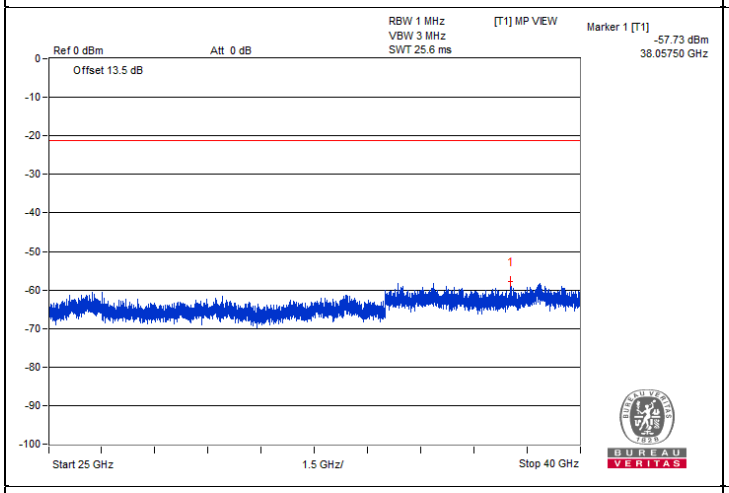
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.73 dBm
38.05750 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

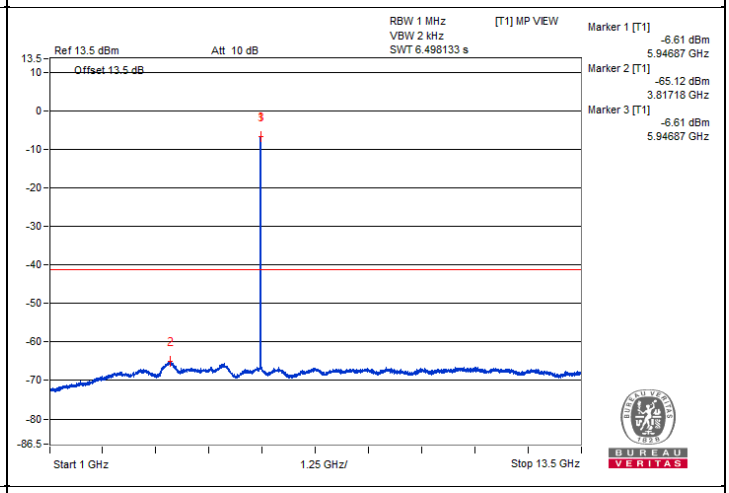
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.61 dBm
5.94687 GHz
Marker 2 [T1]
-65.12 dBm
3.81718 GHz
Marker 3 [T1]
-6.61 dBm
5.94687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

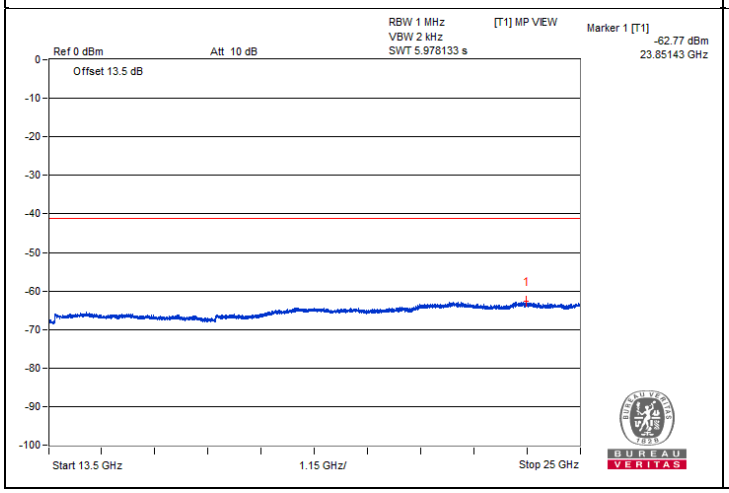
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.77 dBm
23.85143 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

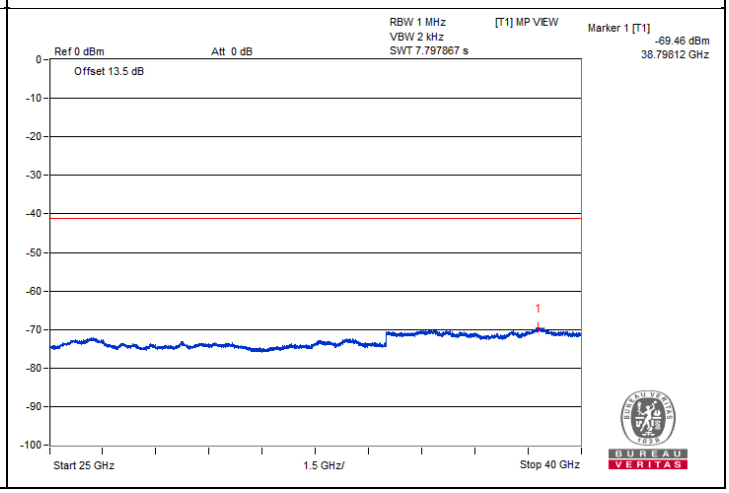
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.46 dBm
38.79812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5867.77	54.45 PK	88.2	-33.75	-45.57	4.76	-40.81
2	#5913.25	43.21 AV	68.2	-24.99	-56.81	4.76	-52.05

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

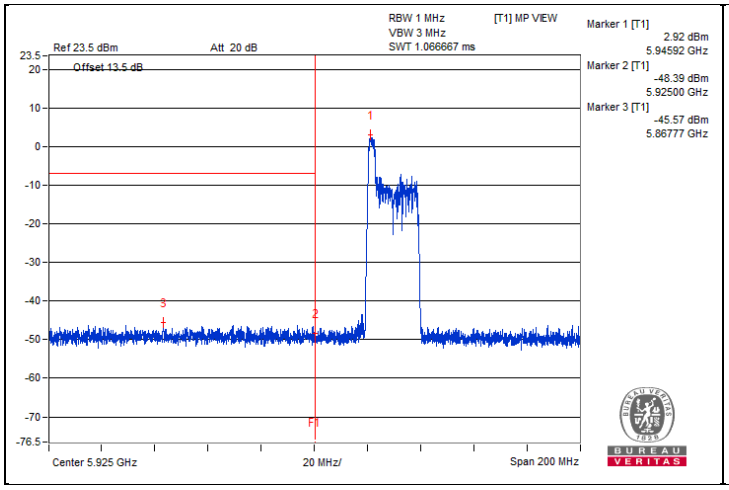

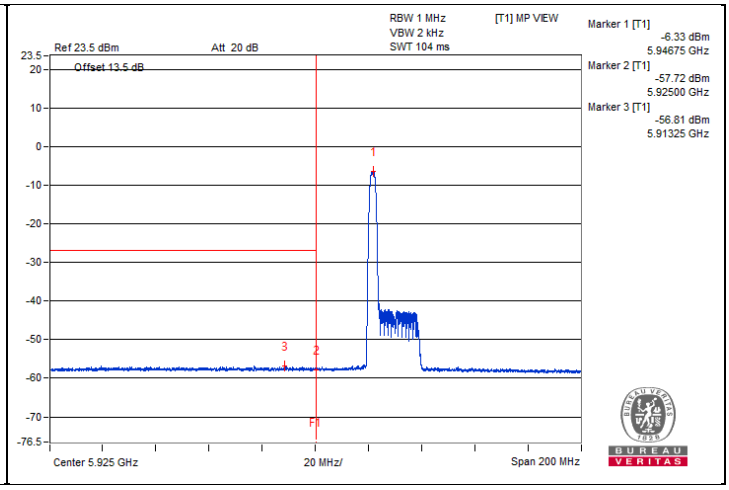

20 MHz Preamble 802.11ax (RU26) - Channel 45

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12345.31	43.8 PK	74	-30.2	-56.22	4.76	-51.46
2	12350	32.55 AV	54	-21.45	-67.47	4.76	-62.71
3	18516.87	46.07 PK	74	-27.93	-53.95	4.76	-49.19
4	18524.06	34.94 AV	54	-19.06	-65.08	4.76	-60.32

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

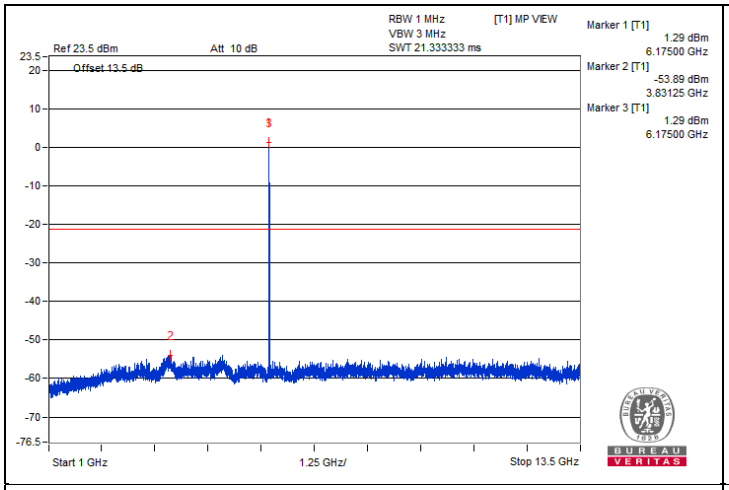
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.29 dBm
6.17500 GHz
Marker 2 [T1]
-53.89 dBm
3.83125 GHz
Marker 3 [T1]
1.29 dBm
6.17500 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

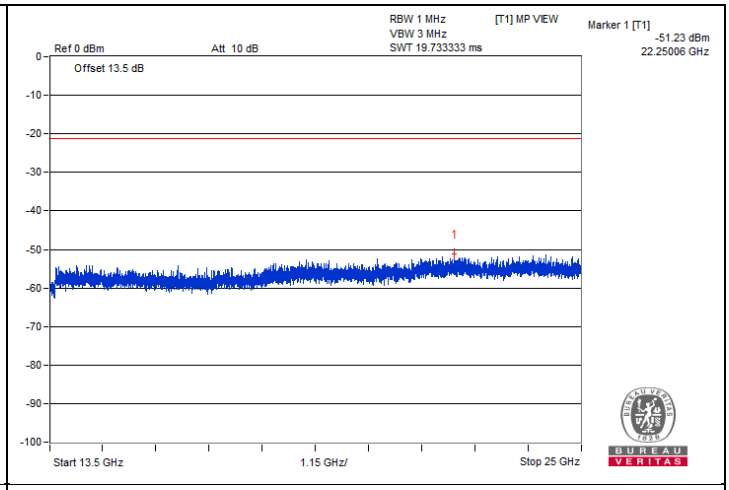
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.23 dBm
22.25006 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

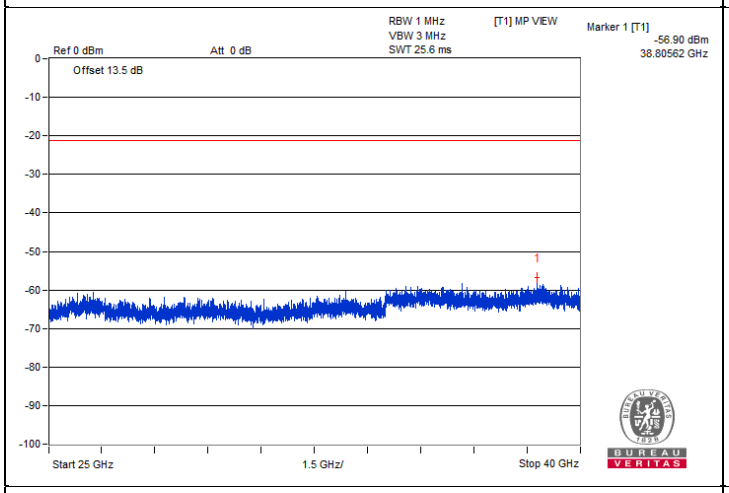
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-56.90 dBm
38.80562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

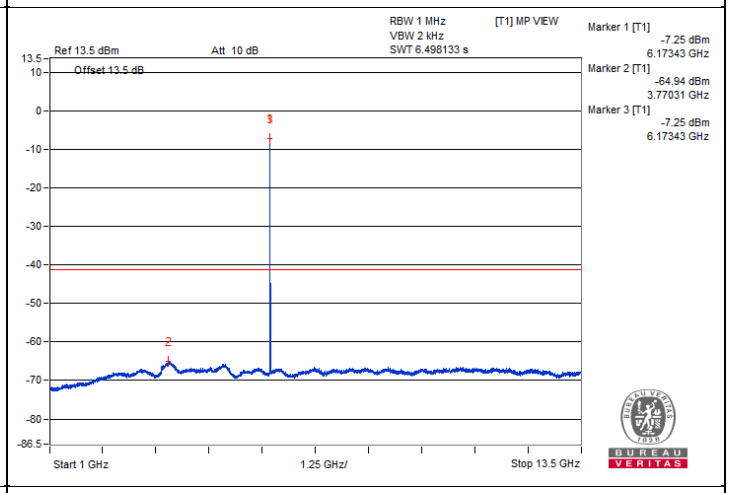
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.25 dBm
6.17343 GHz
Marker 2 [T1]
-64.94 dBm
3.77031 GHz
Marker 3 [T1]
-7.25 dBm
6.17343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

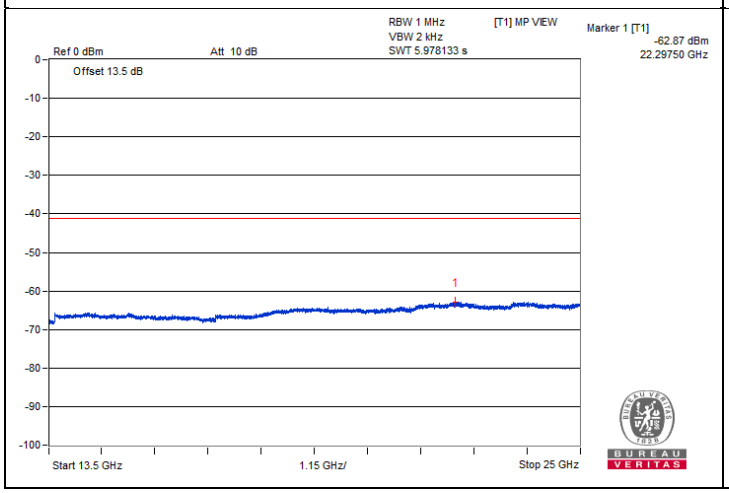
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.87 dBm
22.29750 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

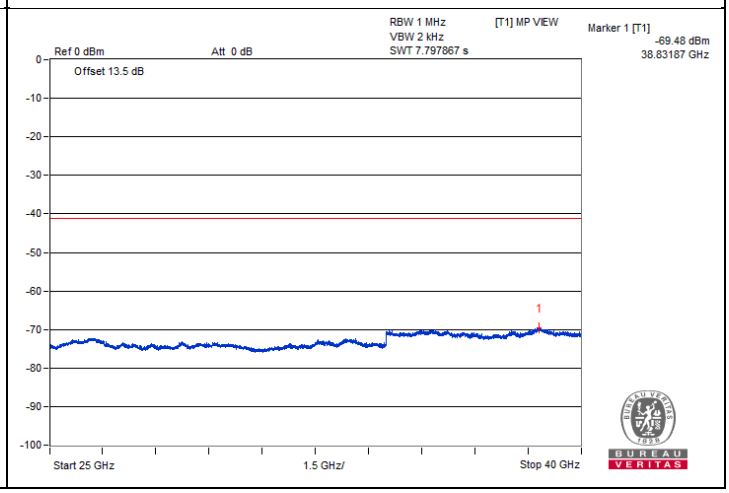
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.48 dBm
38.83187 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12820.31	41.66 PK	88.2	-46.54	-58.36	4.76	-53.60
2	#12820.31	31.84 AV	68.2	-36.36	-68.18	4.76	-63.42
3	19252.87	45.89 PK	74	-28.11	-54.13	4.76	-49.37
4	19245.68	35.3 AV	54	-18.7	-64.72	4.76	-59.96

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

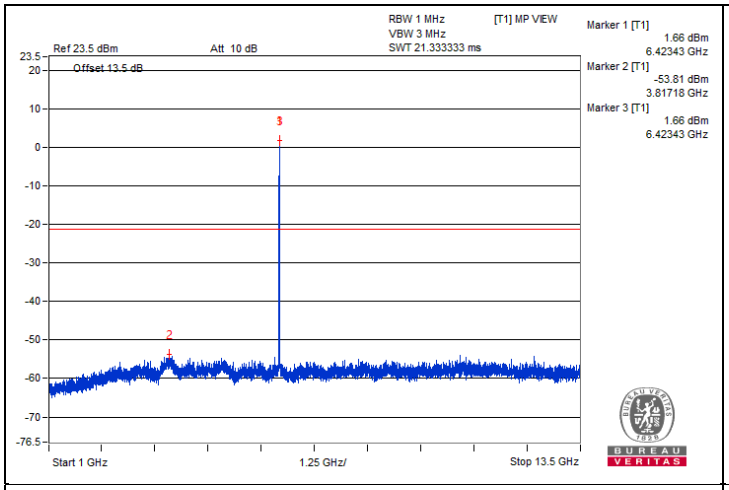
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.66 dBm
6.42343 GHz
Marker 2 [T1]
-53.81 dBm
3.81718 GHz
Marker 3 [T1]
1.66 dBm
6.42343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

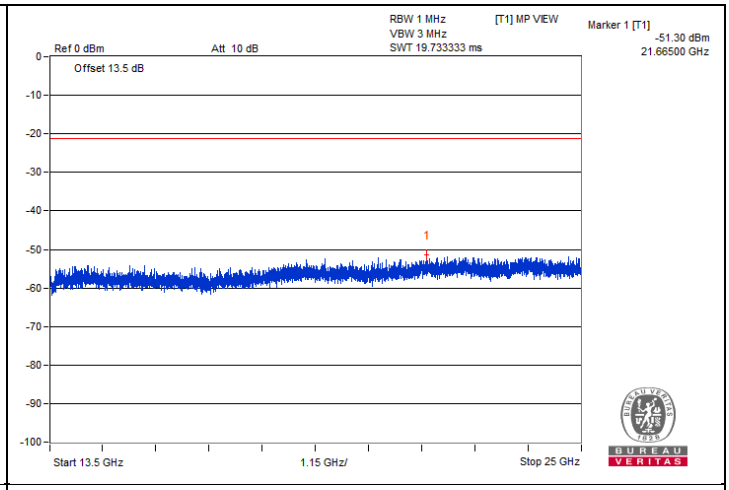
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.30 dBm
21.66500 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

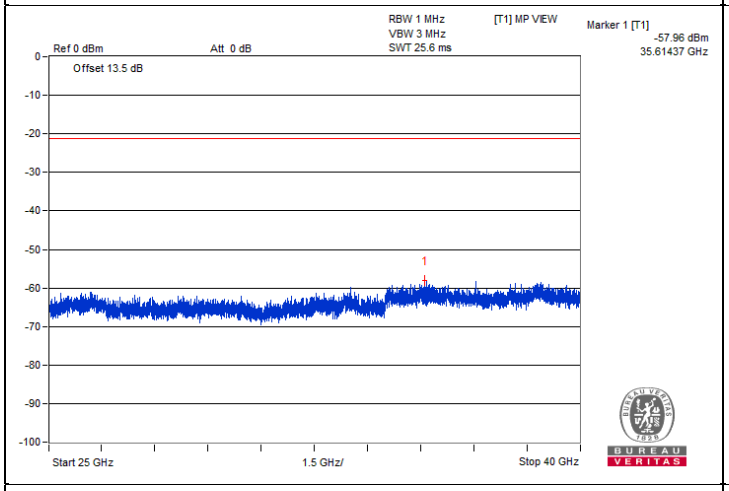
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.96 dBm
35.61437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

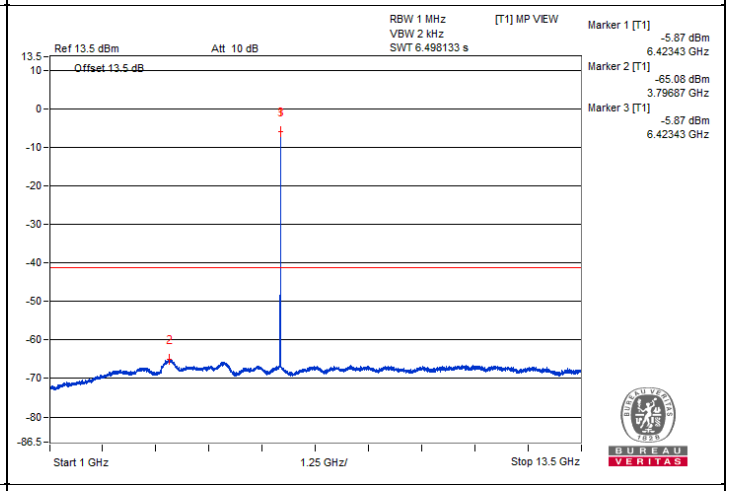
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-5.87 dBm
6.42343 GHz
Marker 2 [T1]
-65.08 dBm
3.79687 GHz
Marker 3 [T1]
-5.87 dBm
6.42343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

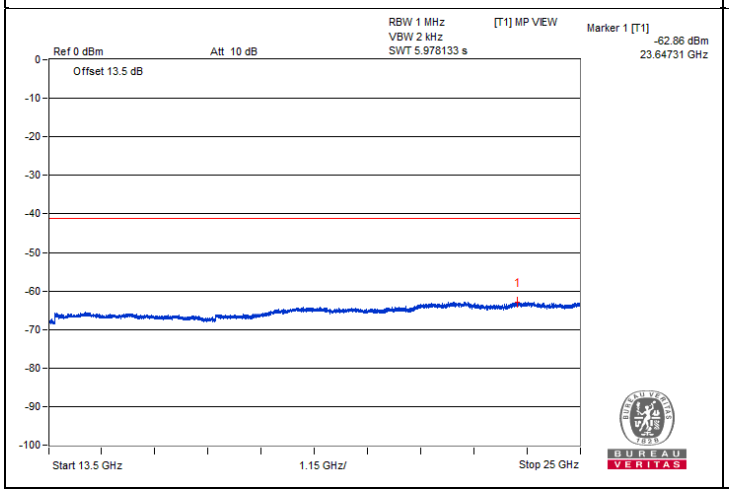
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.86 dBm
23.64731 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

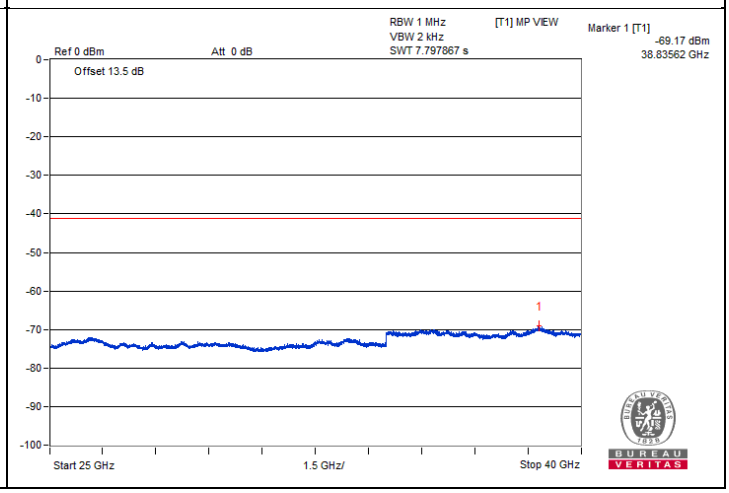
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.17 dBm
38.83562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12865.62	42.74 PK	88.2	-45.46	-57.28	4.76	-52.52
2	#12860.93	31.64 AV	68.2	-36.56	-68.38	4.76	-63.62
3	19300.31	45.68 PK	74	-28.32	-54.34	4.76	-49.58
4	19304.62	35.4 AV	54	-18.6	-64.62	4.76	-59.86

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

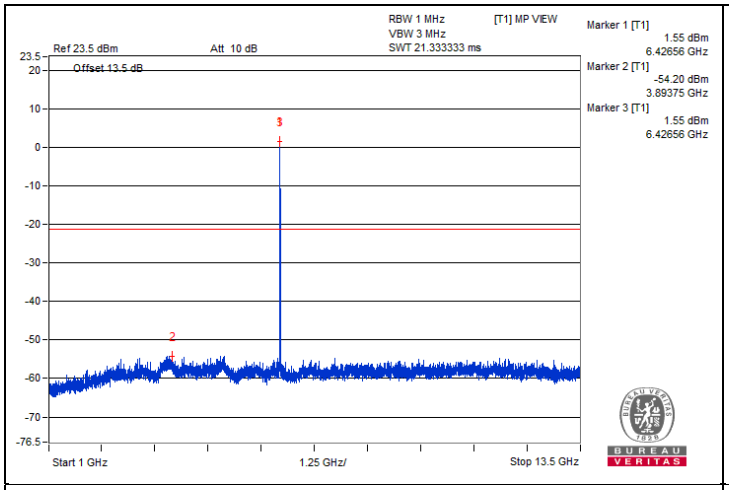
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.55 dBm
6.42656 GHz
Marker 2 [T1]
-54.20 dBm
3.89375 GHz
Marker 3 [T1]
1.55 dBm
6.42656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

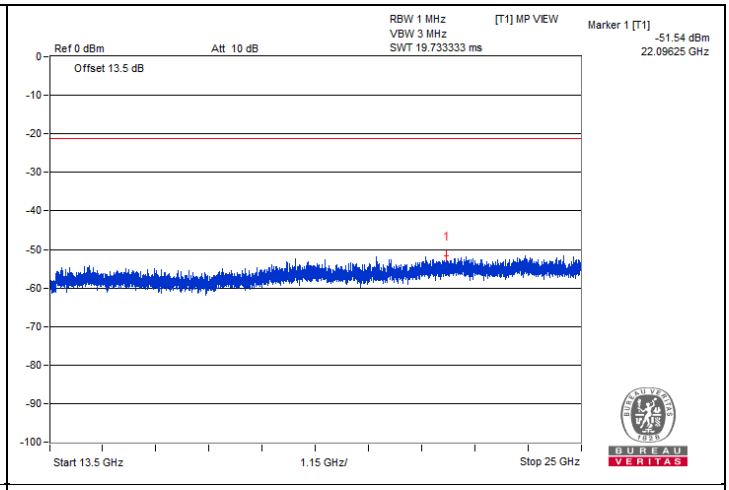
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.54 dBm
22.09625 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

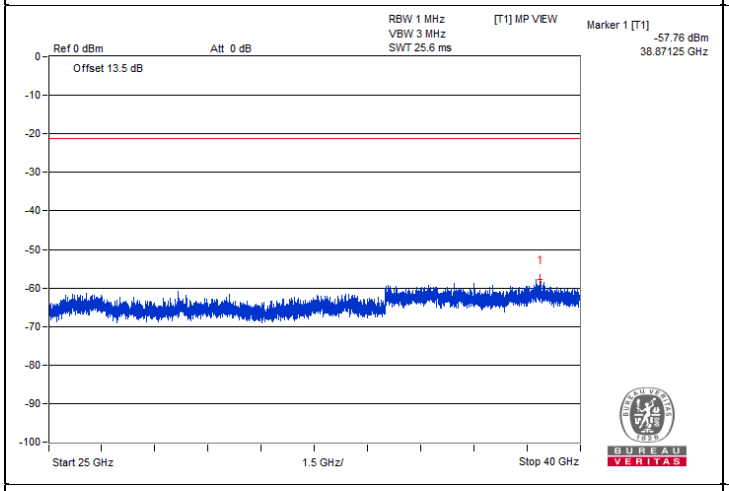
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.76 dBm
38.87125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

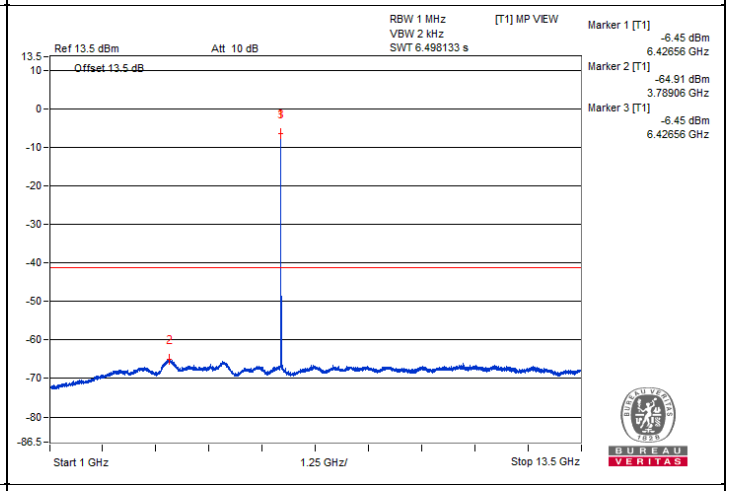
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.45 dBm
6.42656 GHz
Marker 2 [T1]
-64.91 dBm
3.78906 GHz
Marker 3 [T1]
-6.45 dBm
6.42656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

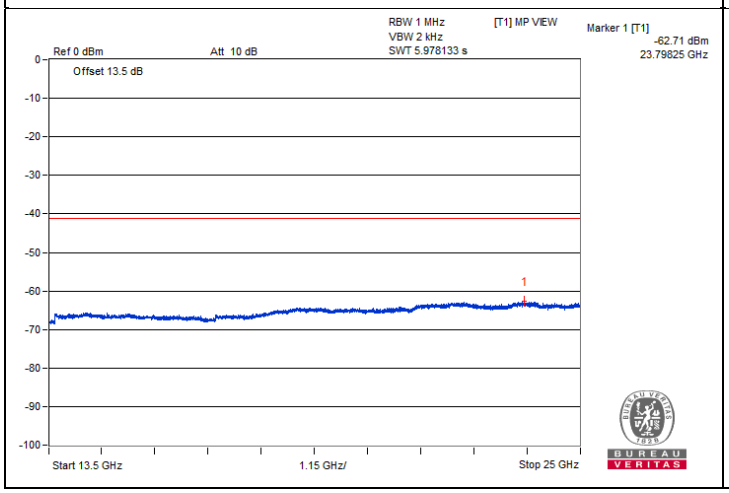
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.71 dBm
23.79825 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

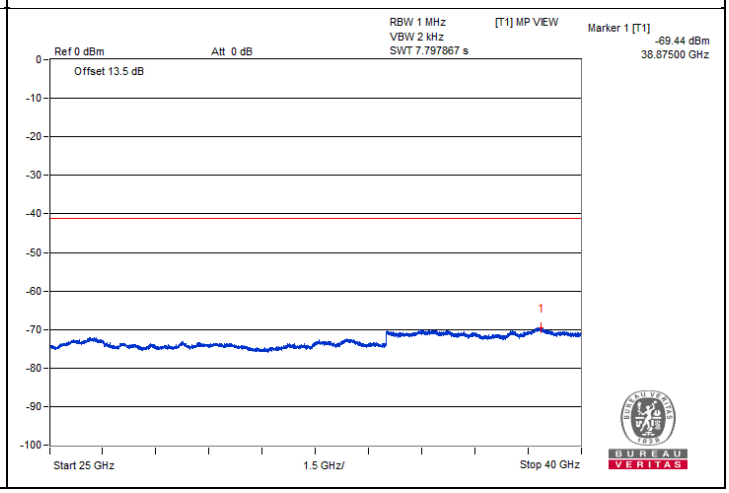
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.44 dBm
38.87500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 105

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12954.68	42.74 PK	88.2	-45.46	-57.28	4.76	-52.52
2	#12959.37	31.35 AV	68.2	-36.85	-68.67	4.76	-63.91
3	19422.5	45.71 PK	74	-28.29	-54.31	4.76	-49.55
4	19416.75	35.41 AV	54	-18.59	-64.61	4.76	-59.85

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

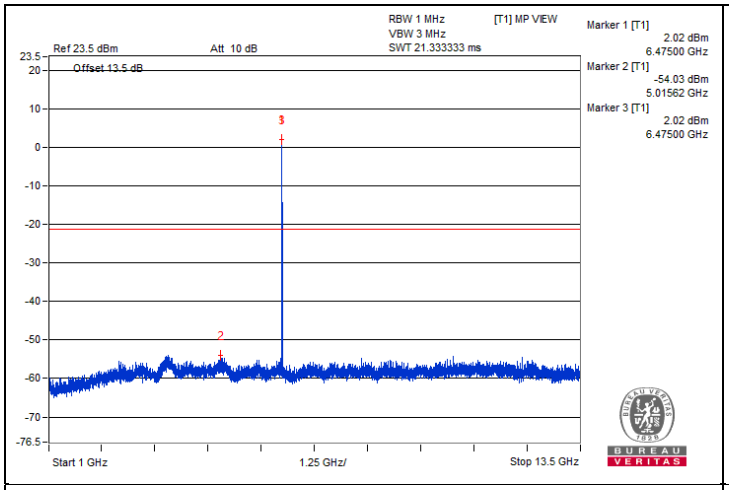
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
2.02 dBm
6.47500 GHz
Marker 2 [T1]
-54.03 dBm
5.01562 GHz
Marker 3 [T1]
2.02 dBm
6.47500 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

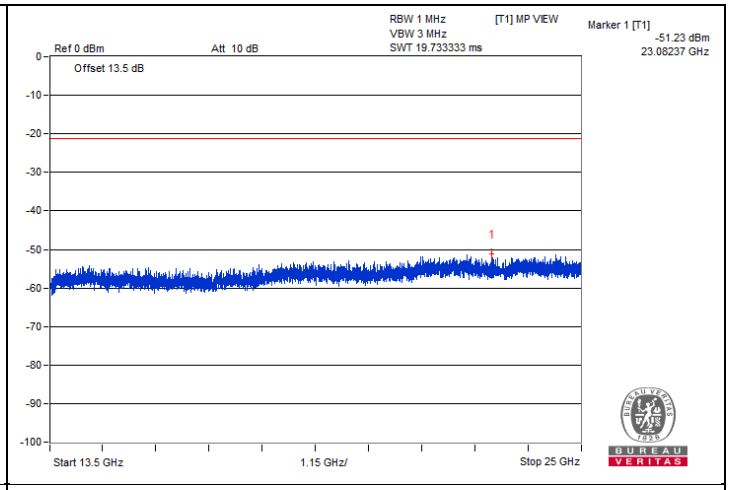
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.23 dBm
23.08237 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

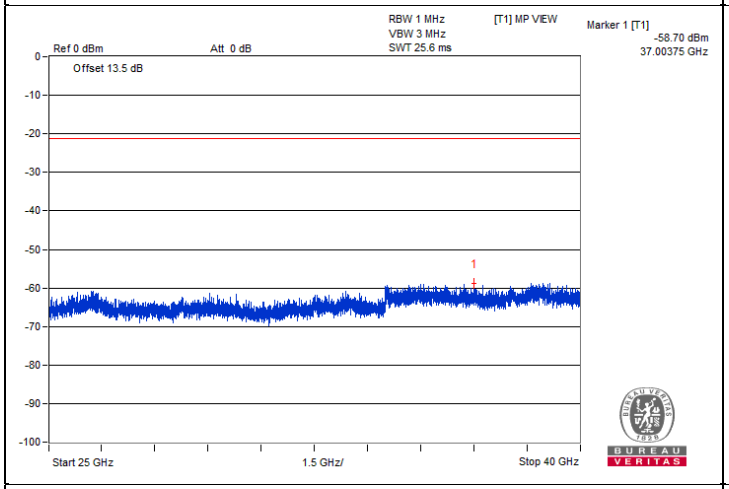
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.70 dBm
37.00375 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

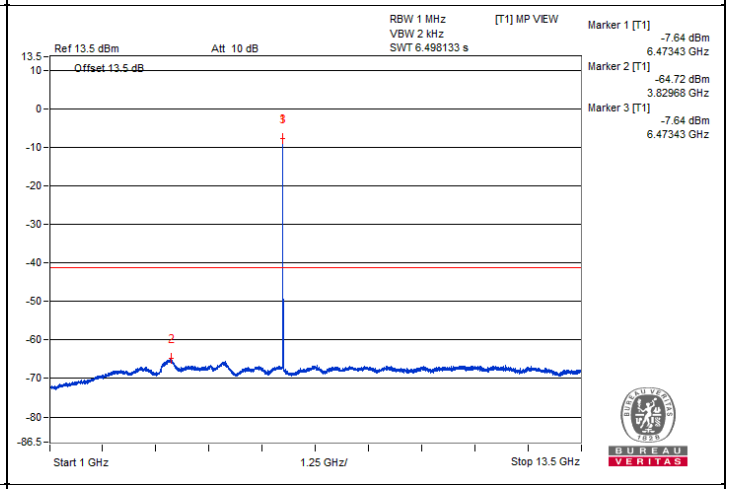
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.64 dBm
6.47343 GHz
Marker 2 [T1]
-64.72 dBm
3.82968 GHz
Marker 3 [T1]
-7.64 dBm
6.47343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

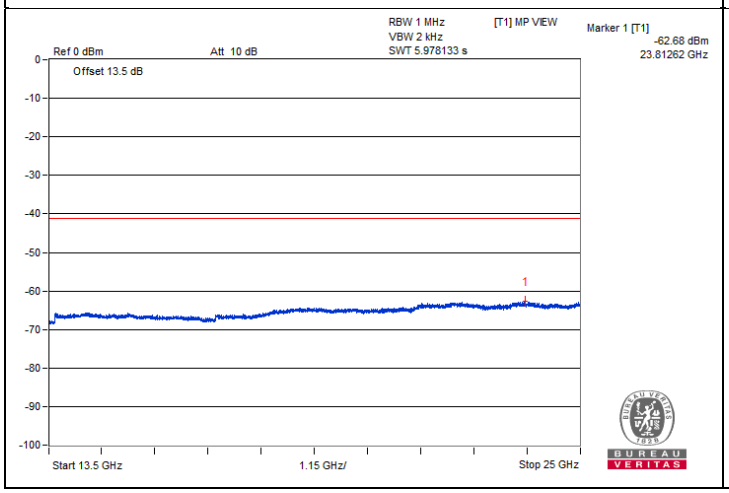
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.68 dBm
23.81262 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

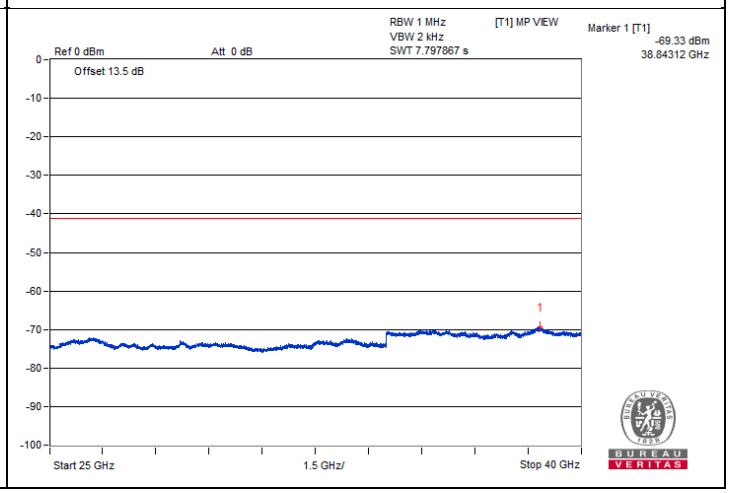
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.33 dBm
38.84312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 113

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13026.56	42.79 PK	88.2	-45.41	-57.23	4.76	-52.47
2	#13034.37	31.71 AV	68.2	-36.49	-68.31	4.76	-63.55
3	19547.56	45.61 PK	74	-28.39	-54.41	4.76	-49.65
4	19547.56	35.27 AV	54	-18.73	-64.75	4.76	-59.99

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

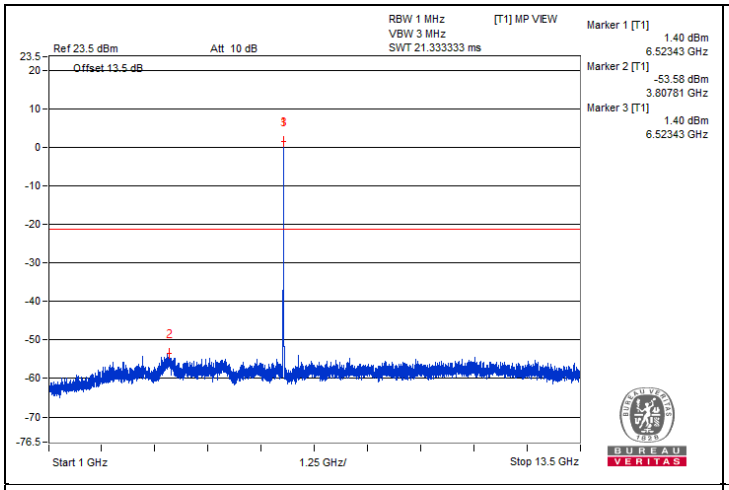
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.40 dBm
6.52343 GHz
Marker 2 [T1]
-53.58 dBm
3.80781 GHz
Marker 3 [T1]
1.40 dBm
6.52343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

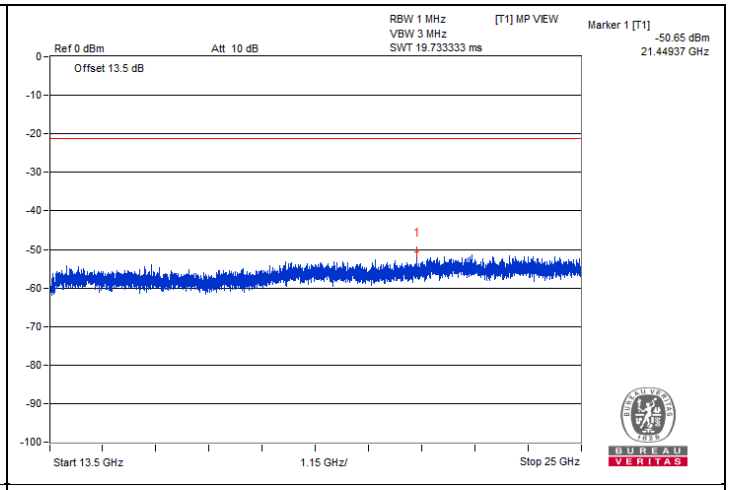
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.65 dBm
21.44937 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

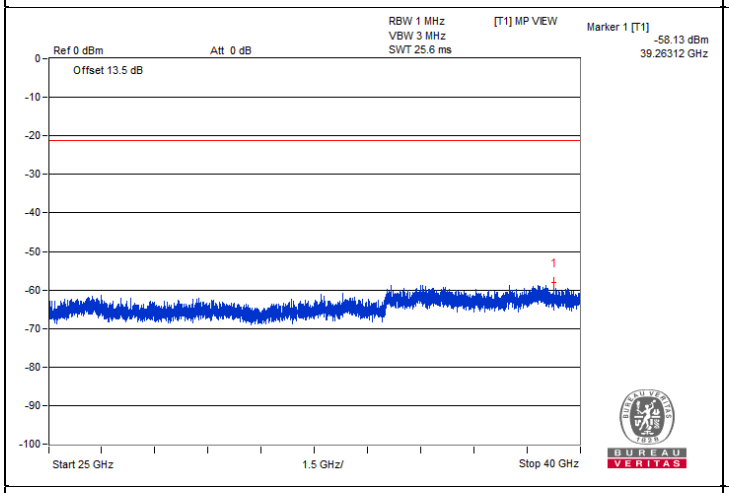
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.13 dBm
39.26312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

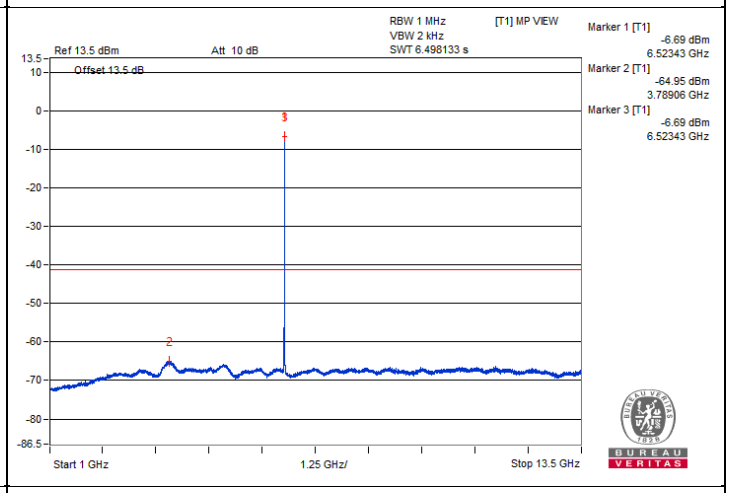
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.69 dBm
6.52343 GHz
Marker 2 [T1]
-64.95 dBm
3.78906 GHz
Marker 3 [T1]
-6.69 dBm
6.52343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

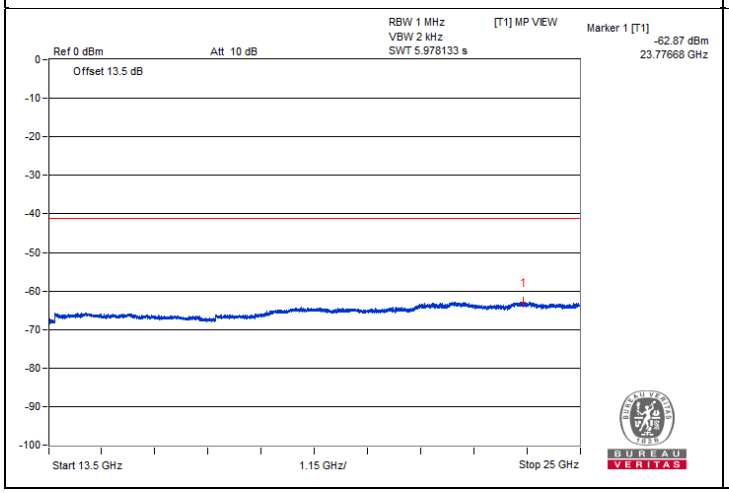
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.87 dBm
23.77668 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

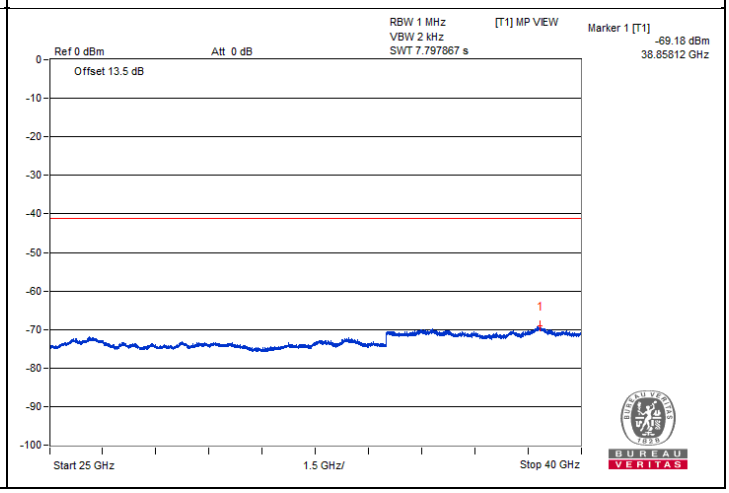
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.18 dBm
38.85812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13071.87	43.25 PK	88.2	-44.95	-56.77	4.76	-52.01
2	#13064.06	31.83 AV	68.2	-36.37	-68.19	4.76	-63.43
3	19612.25	44.43 PK	74	-29.57	-55.59	4.76	-50.83
4	19600.75	34.86 AV	54	-19.14	-65.16	4.76	-60.40

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

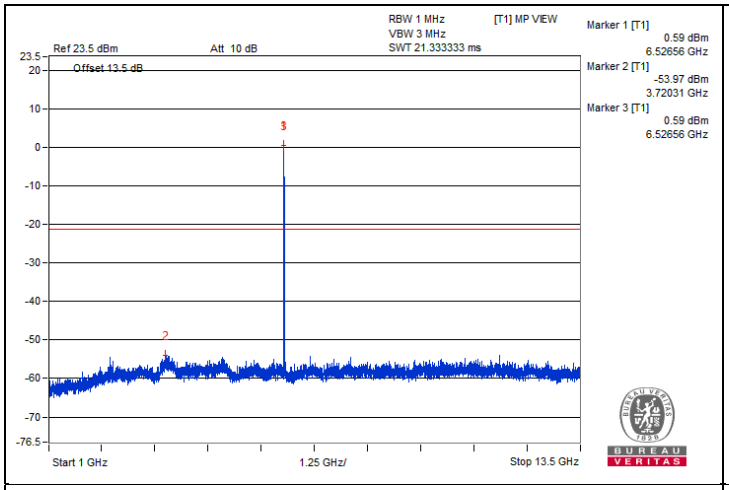
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
0.59 dBm
6.52656 GHz
Marker 2 [T1]
-53.97 dBm
3.72031 GHz
Marker 3 [T1]
0.59 dBm
6.52656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

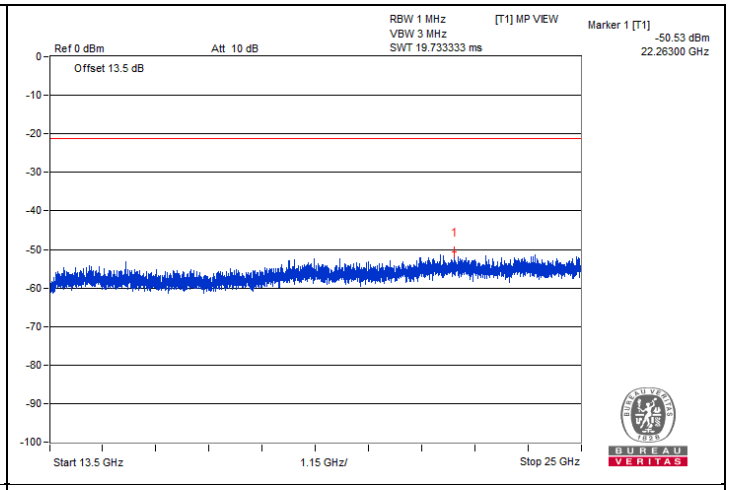
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.53 dBm
22.26300 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

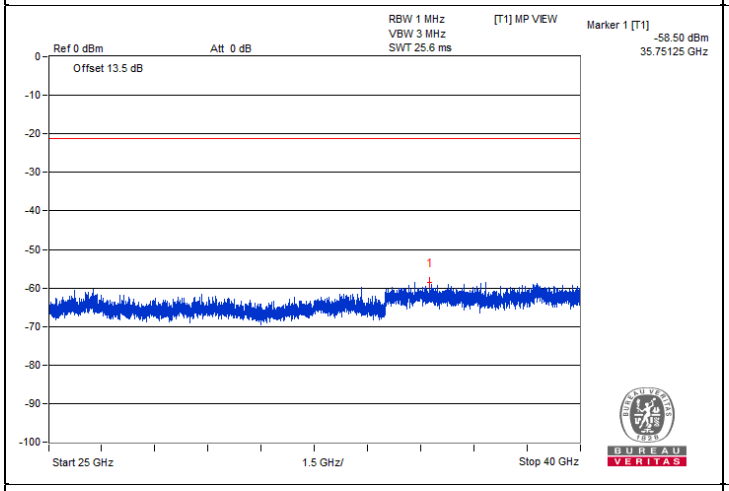
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.50 dBm
35.75125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

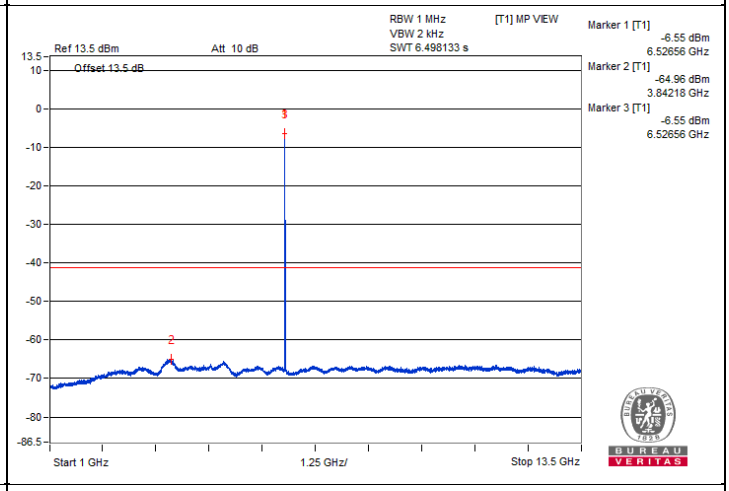
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.55 dBm
6.52656 GHz
Marker 2 [T1]
-64.96 dBm
3.84218 GHz
Marker 3 [T1]
-6.55 dBm
6.52656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

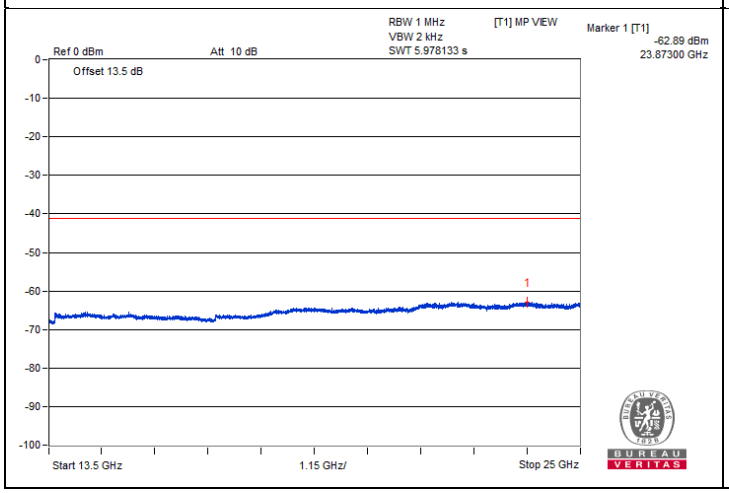
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.89 dBm
23.87300 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

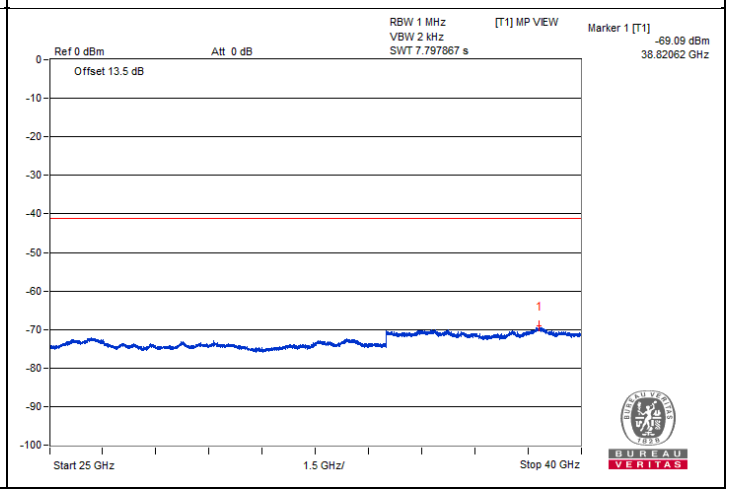
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.09 dBm
38.82062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13381.25	44.54 PK	74	-29.46	-55.48	4.76	-50.72
2	13396.87	31.97 AV	54	-22.03	-68.05	4.76	-63.29
3	20085.18	45.91 PK	74	-28.09	-54.11	4.76	-49.35
4	20088.06	35.49 AV	54	-18.51	-64.53	4.76	-59.77

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

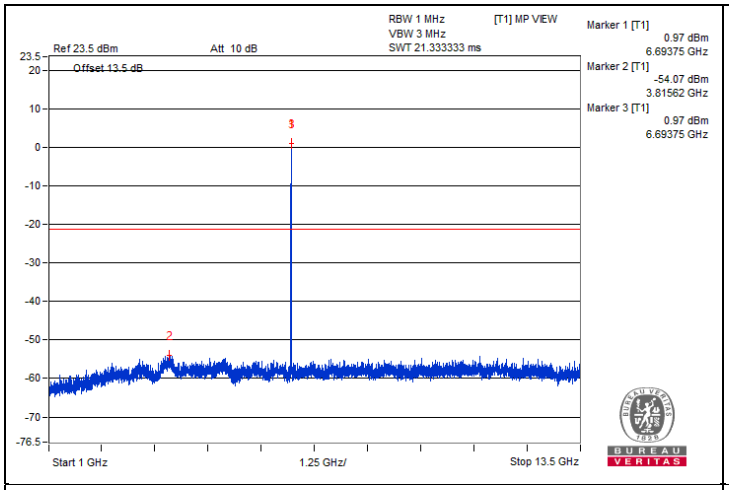
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
0.97 dBm
6.69375 GHz
Marker 2 [T1]
-54.07 dBm
3.81562 GHz
Marker 3 [T1]
0.97 dBm
6.69375 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

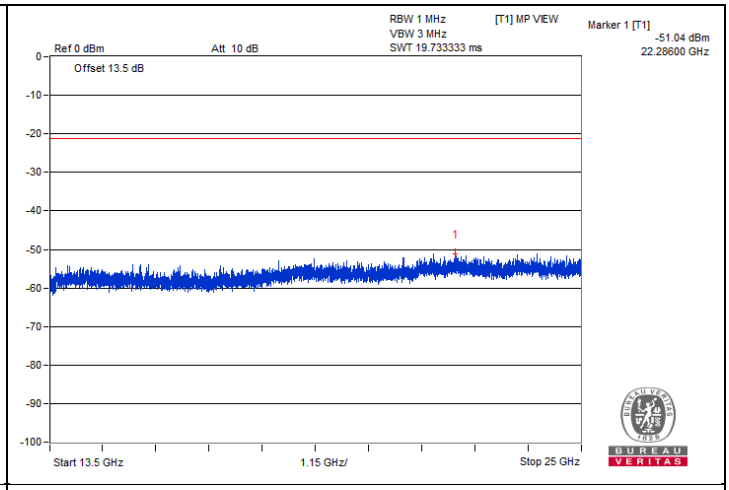
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.04 dBm
22.28600 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

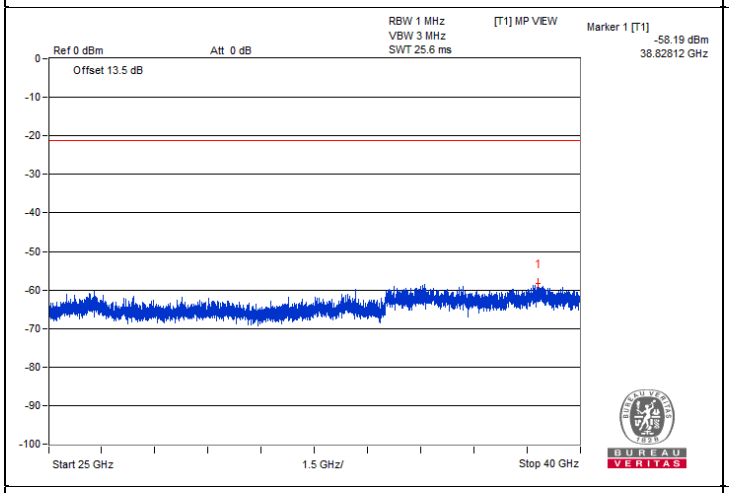
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.19 dBm
38.82812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

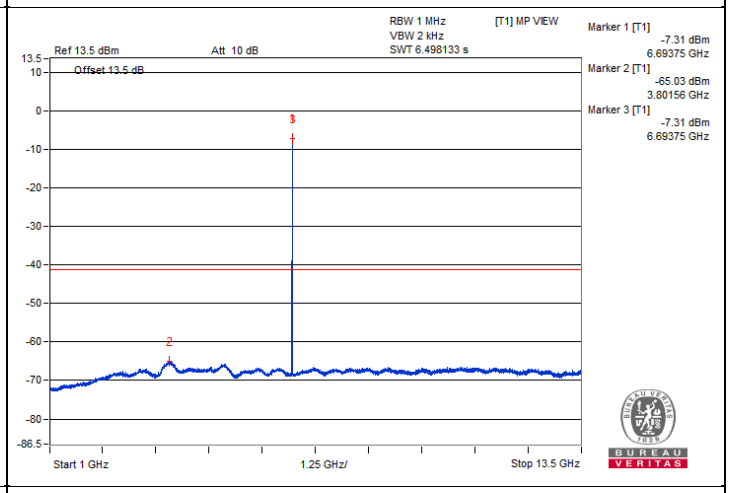
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.31 dBm
6.69375 GHz
Marker 2 [T1]
-65.03 dBm
3.80156 GHz
Marker 3 [T1]
-7.31 dBm
6.69375 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

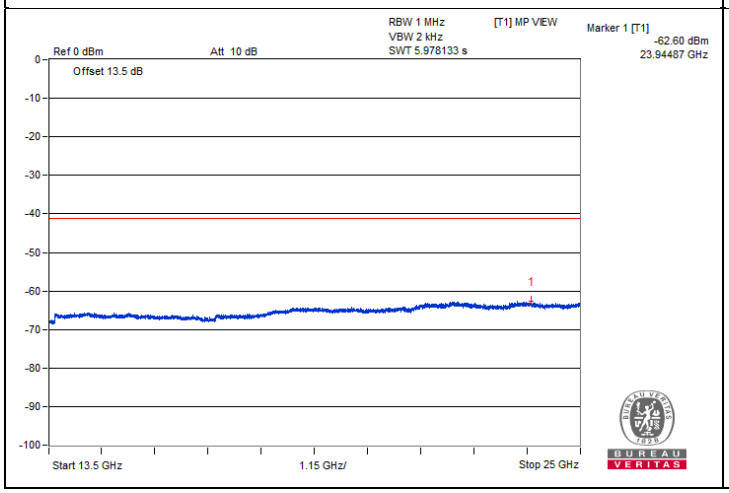
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.60 dBm
23.94487 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

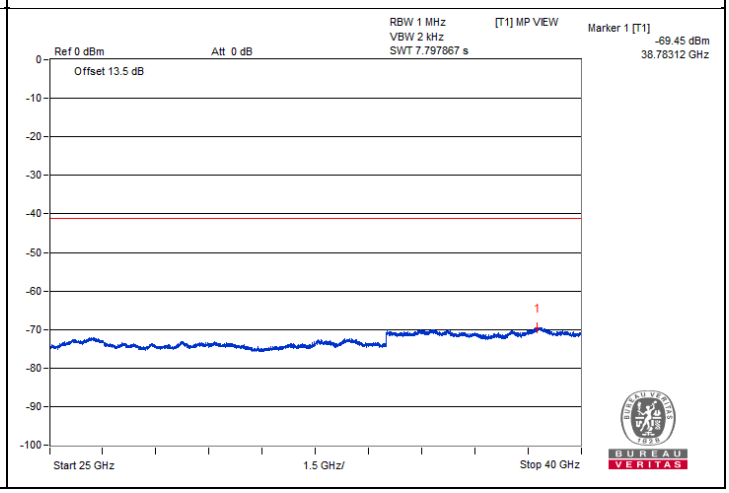
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.45 dBm
38.78312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13705.56	43.29 PK	88.2	-44.91	-56.73	4.76	-51.97
2	#13708.43	33.75 AV	68.2	-34.45	-66.27	4.76	-61.51
3	20561	45.49 PK	74	-28.51	-54.53	4.76	-49.77
4	20558.12	35.33 AV	54	-18.67	-64.69	4.76	-59.93

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

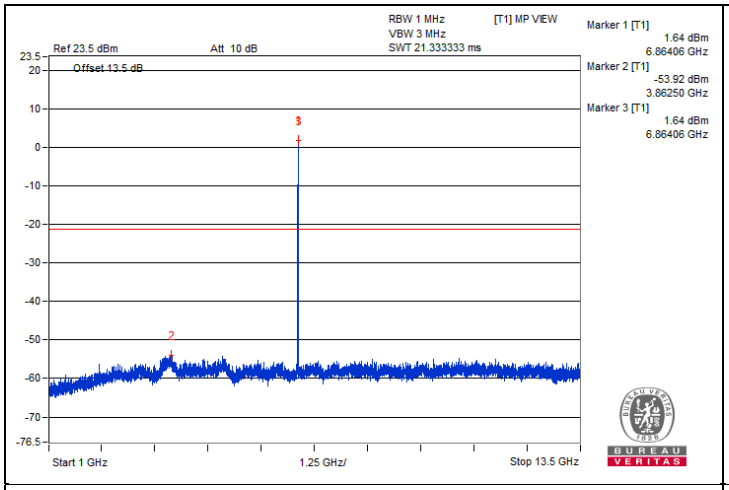
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.64 dBm
6.86406 GHz
Marker 2 [T1]
-53.92 dBm
3.86250 GHz
Marker 3 [T1]
1.64 dBm
6.86406 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

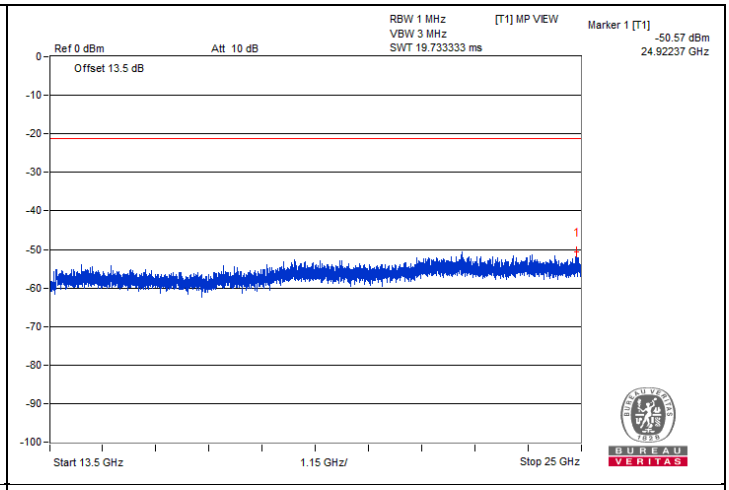
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.57 dBm
24.92237 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

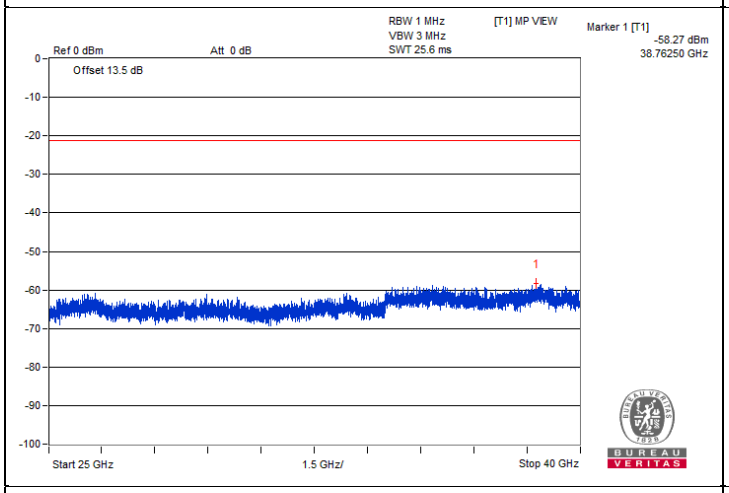
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.27 dBm
38.76250 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

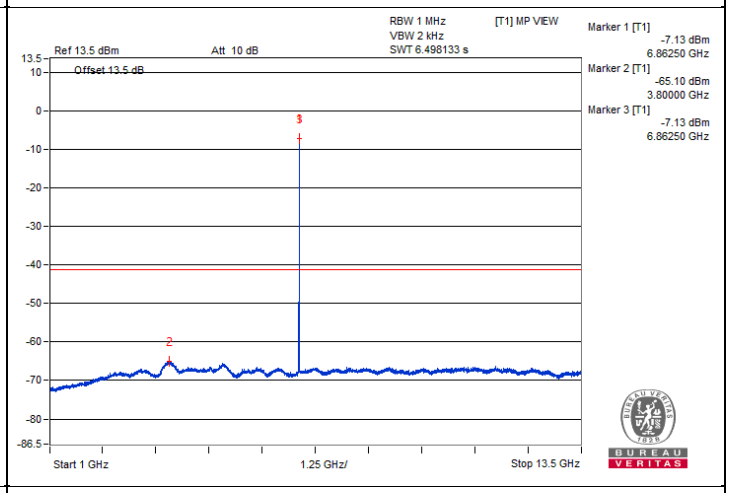
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.13 dBm
6.86250 GHz
Marker 2 [T1]
-65.10 dBm
3.80000 GHz
Marker 3 [T1]
-7.13 dBm
6.86250 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

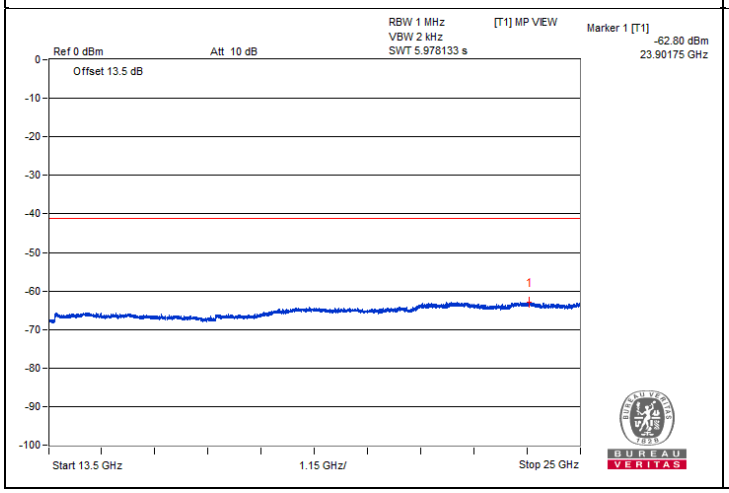
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.80 dBm
23.90175 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

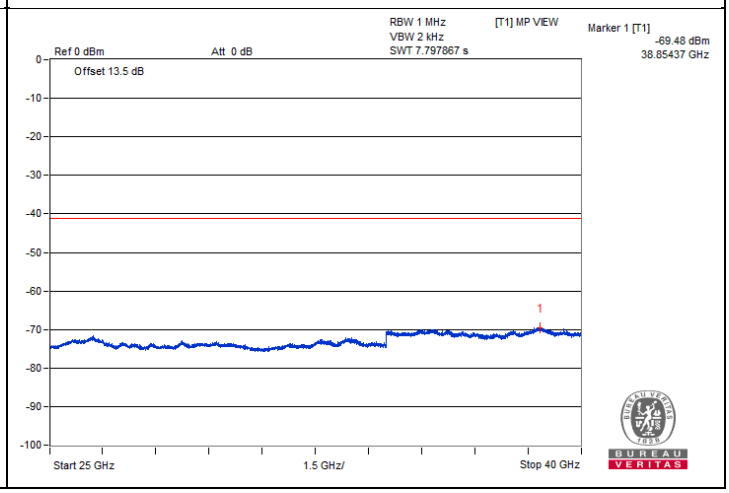
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.48 dBm
38.85437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 185

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13755.87	42.66 PK	88.2	-45.54	-57.36	4.76	-52.60
2	#13758.75	33.59 AV	68.2	-34.61	-66.43	4.76	-61.67
3	20617.06	46.1 PK	74	-27.9	-53.92	4.76	-49.16
4	20615.62	35.05 AV	54	-18.95	-64.97	4.76	-60.21

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

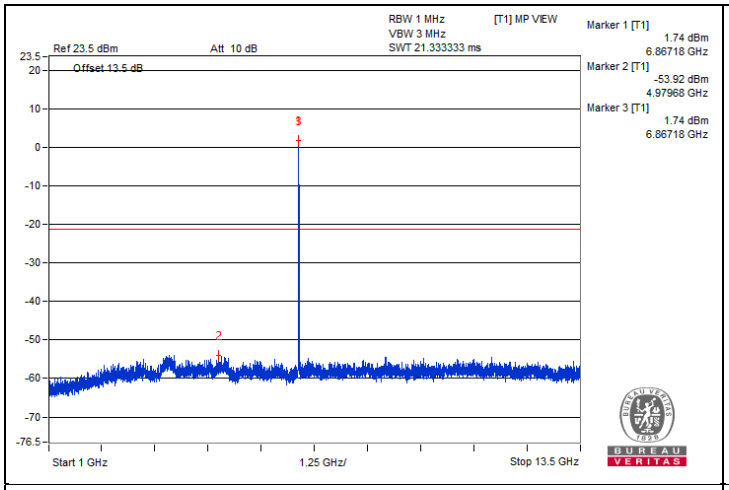
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.74 dBm
6.86718 GHz
Marker 2 [T1]
-53.92 dBm
4.97968 GHz
Marker 3 [T1]
1.74 dBm
6.86718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

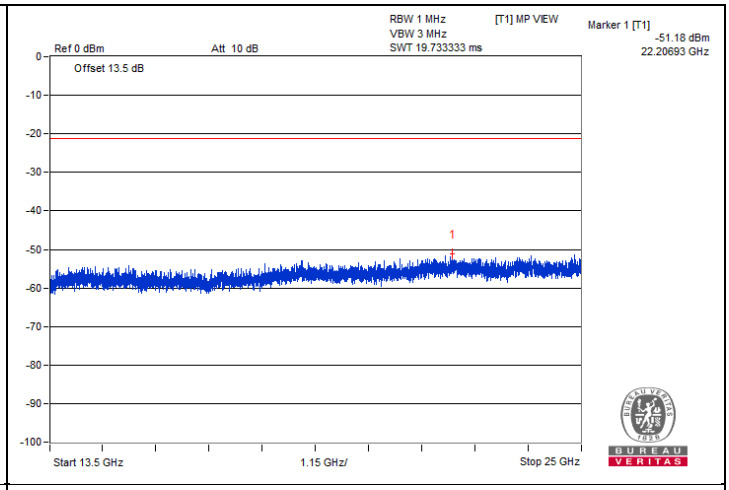
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.18 dBm
22.20693 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

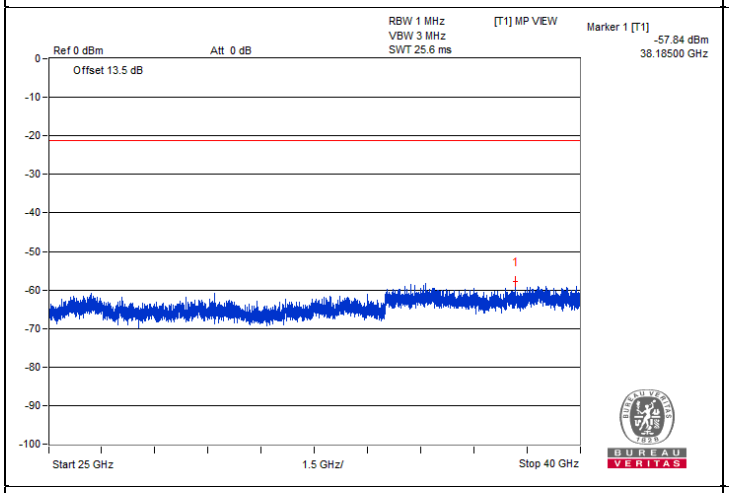
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.84 dBm
38.18500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

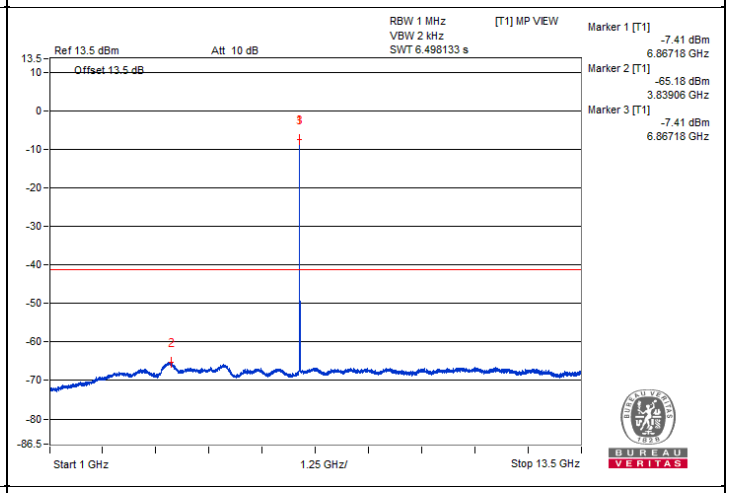
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.41 dBm
6.86718 GHz
Marker 2 [T1]
-65.18 dBm
3.83906 GHz
Marker 3 [T1]
-7.41 dBm
6.86718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

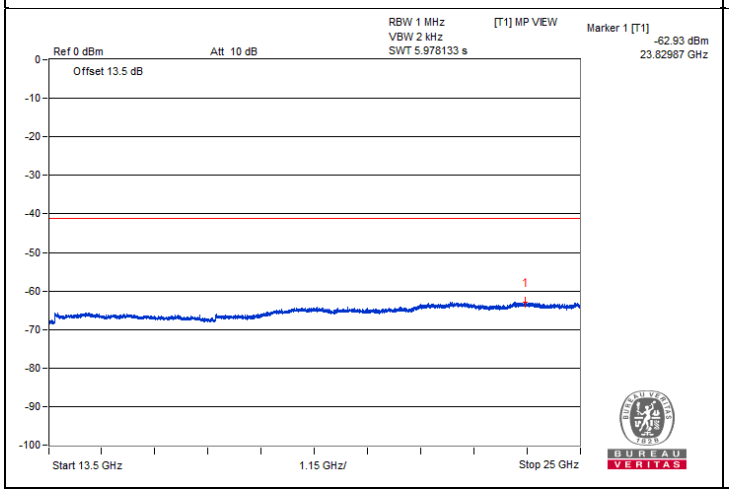
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.93 dBm
23.82987 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

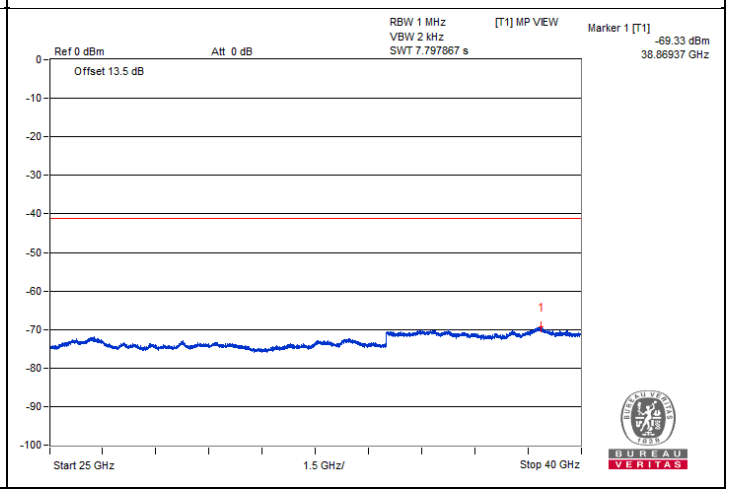
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.33 dBm
38.86937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 209

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13988.75	43.35 PK	88.2	-44.85	-56.67	4.76	-51.91
2	#13988.75	33.86 AV	68.2	-34.34	-66.16	4.76	-61.40
3	20985.06	45.8 PK	74	-28.2	-54.22	4.76	-49.46
4	20987.93	35.29 AV	54	-18.71	-64.73	4.76	-59.97

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

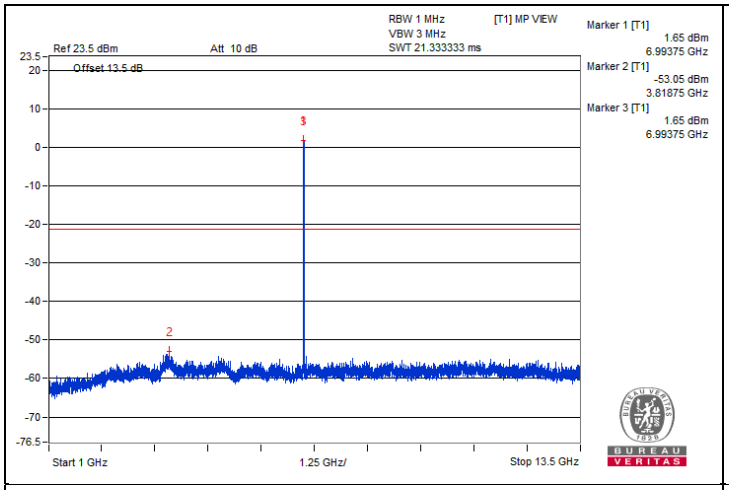
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.65 dBm
6.99375 GHz
Marker 2 [T1]
-53.05 dBm
3.81875 GHz
Marker 3 [T1]
1.65 dBm
6.99375 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

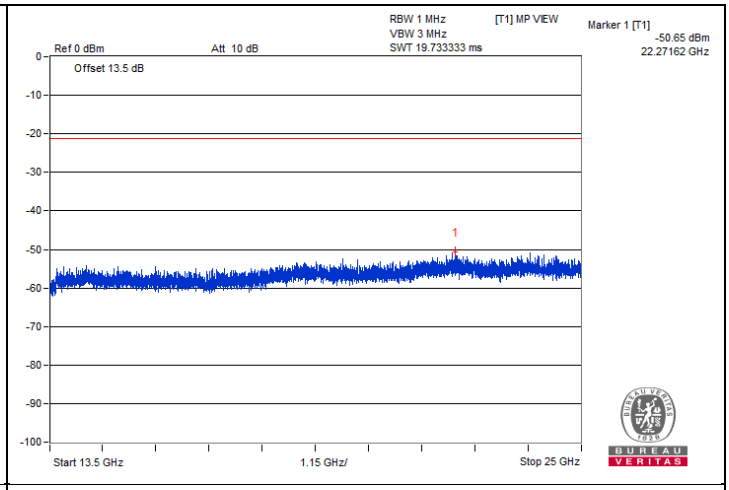
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.65 dBm
22.27162 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

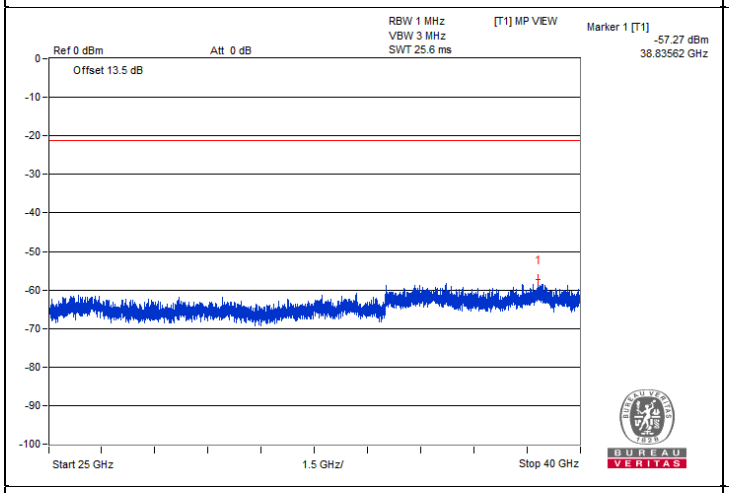
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.27 dBm
38.83562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

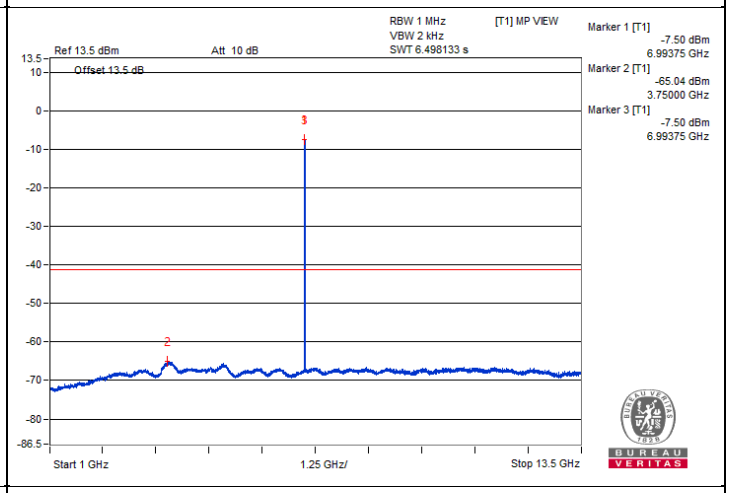
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.50 dBm
6.99375 GHz
Marker 2 [T1]
-65.04 dBm
3.75000 GHz
Marker 3 [T1]
-7.50 dBm
6.99375 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

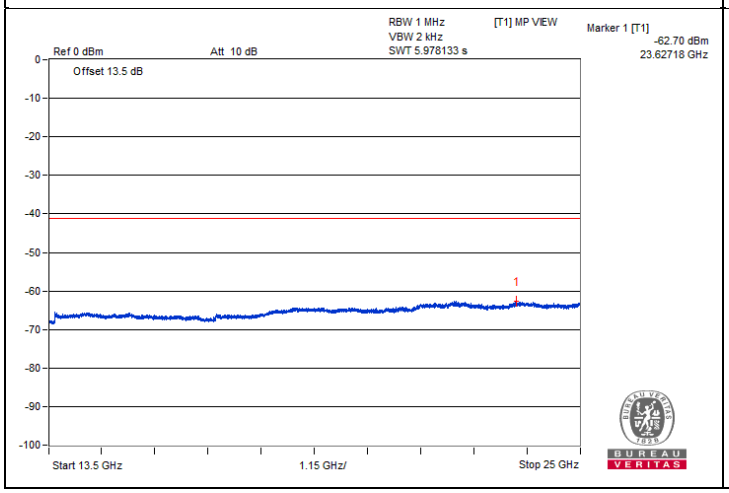
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.70 dBm
23.62718 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

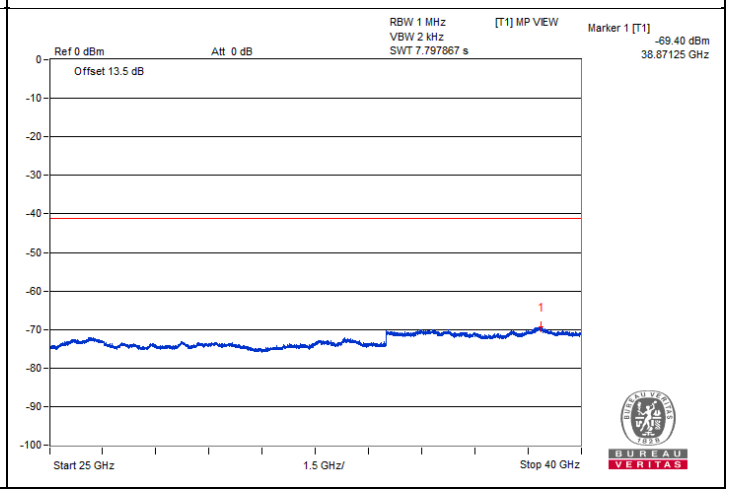
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.40 dBm
38.87125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14246.06	44.61 PK	88.2	-43.59	-55.41	4.76	-50.65
2	#14238.87	34.08 AV	68.2	-34.12	-65.94	4.76	-61.18
3	21343	45.93 PK	74	-28.07	-54.09	4.76	-49.33
4	21347.31	35.32 AV	54	-18.68	-64.7	4.76	-59.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

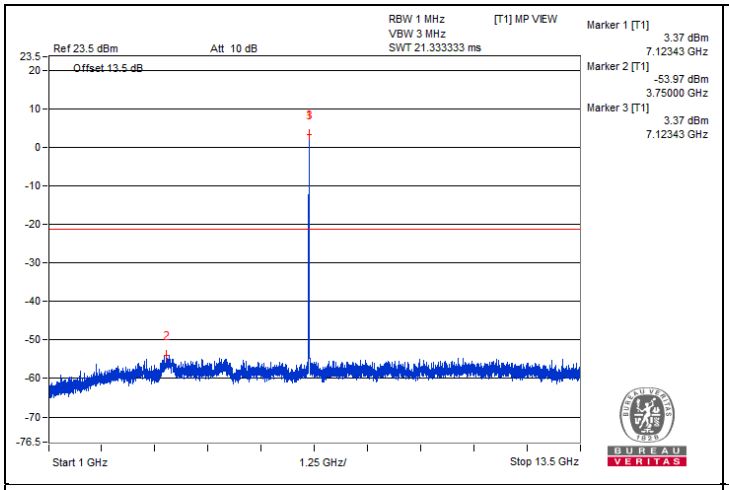
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.37 dBm
7.12343 GHz
Marker 2 [T1]
-53.97 dBm
3.75000 GHz
Marker 3 [T1]
3.37 dBm
7.12343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

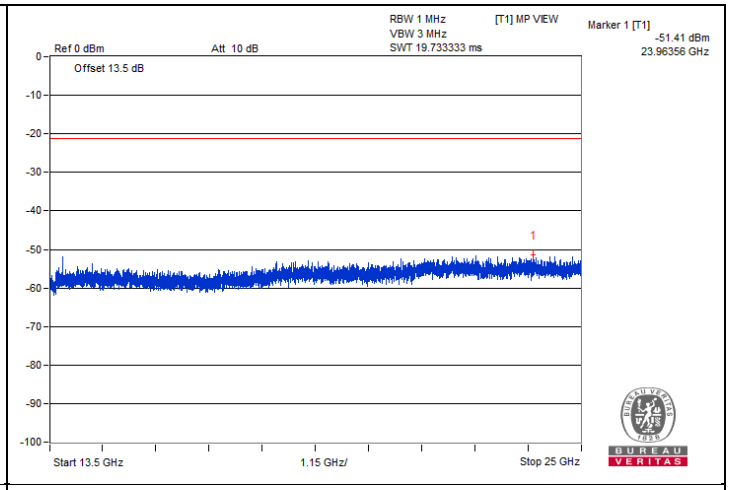
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.41 dBm
23.96356 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

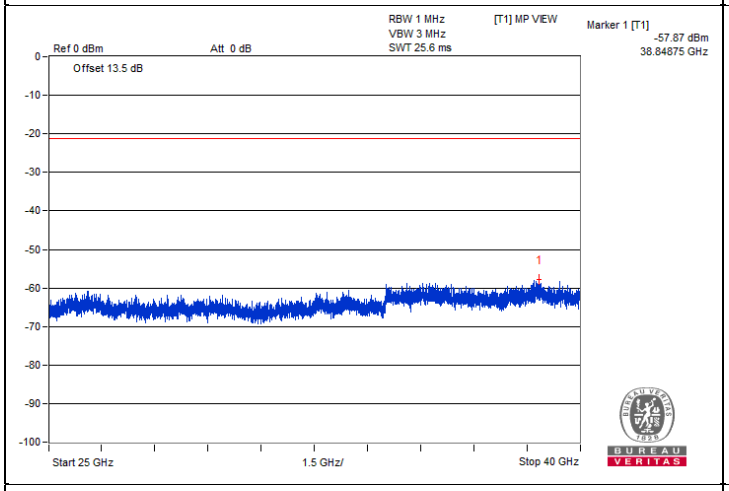
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.87 dBm
38.84875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

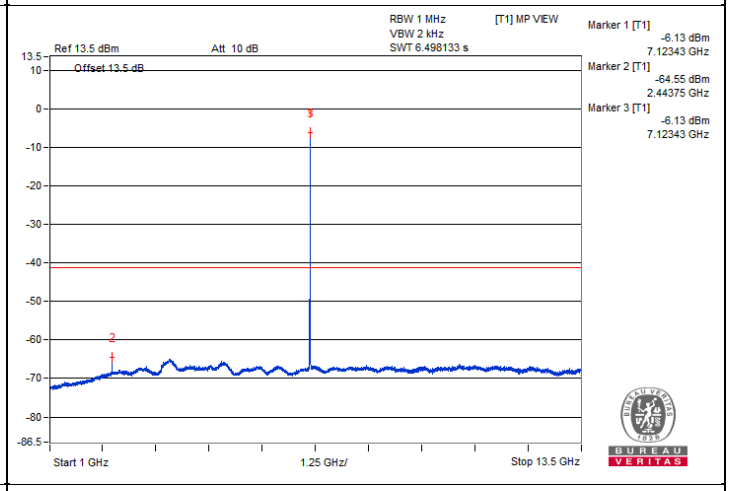
RBW 1 MHz
VBW 2 kHz
SWT 6.498133 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.13 dBm
7.12343 GHz
Marker 2 [T1]
-64.55 dBm
2.44375 GHz
Marker 3 [T1]
-6.13 dBm
7.12343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

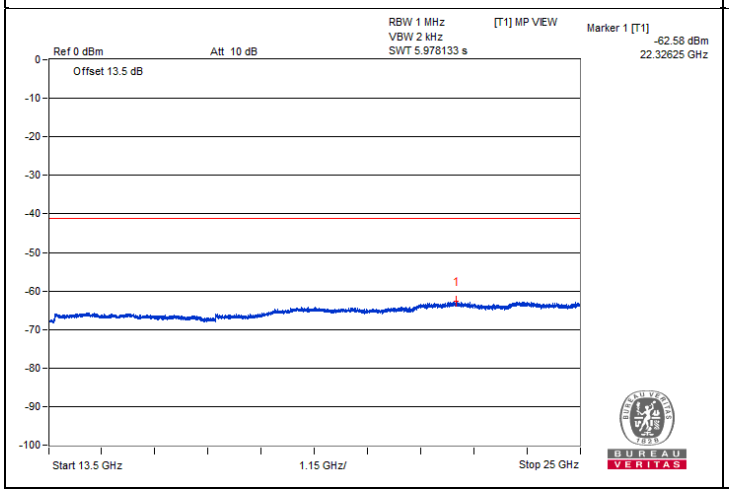
RBW 1 MHz
VBW 2 kHz
SWT 5.978133 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.58 dBm
22.32625 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

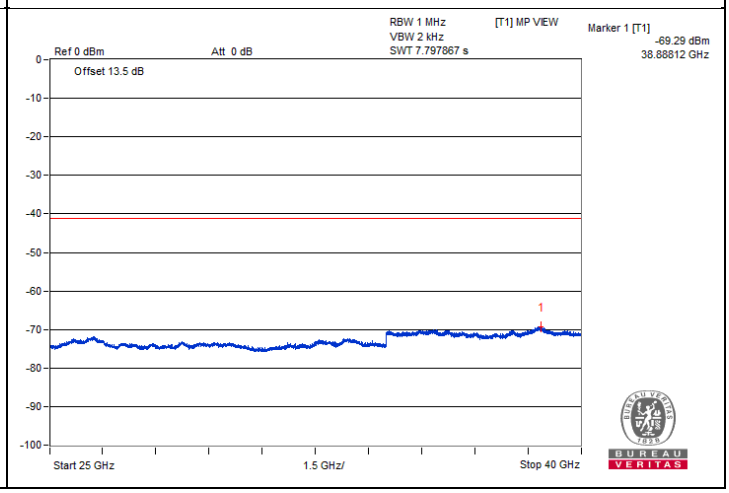
RBW 1 MHz
VBW 2 kHz
SWT 7.797867 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.29 dBm
38.88812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	60.13 PK	88.2	-28.07	-39.22	4.09	-35.13
2	#7125	48.63 AV	68.2	-19.57	-50.72	4.09	-46.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

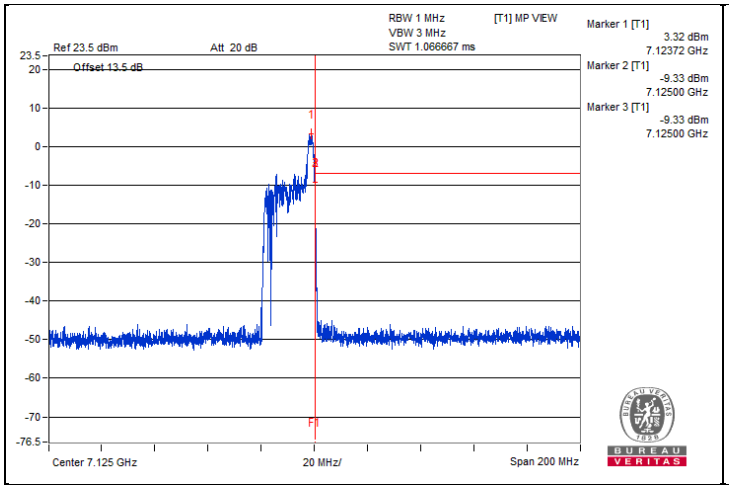

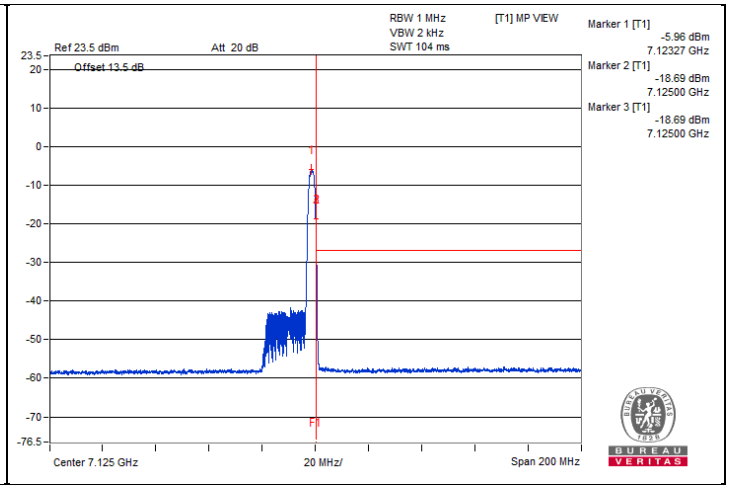

20 MHz Preamble 802.11ax (RU52) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11903.12	43.39 PK	74	-30.61	-56.63	4.76	-51.87
2	11901.56	32.95 AV	54	-21.05	-67.07	4.76	-62.31
3	17867.12	44.28 PK	74	-29.72	-55.74	4.76	-50.98
4	17862.81	33.73 AV	54	-20.27	-66.29	4.76	-61.53

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

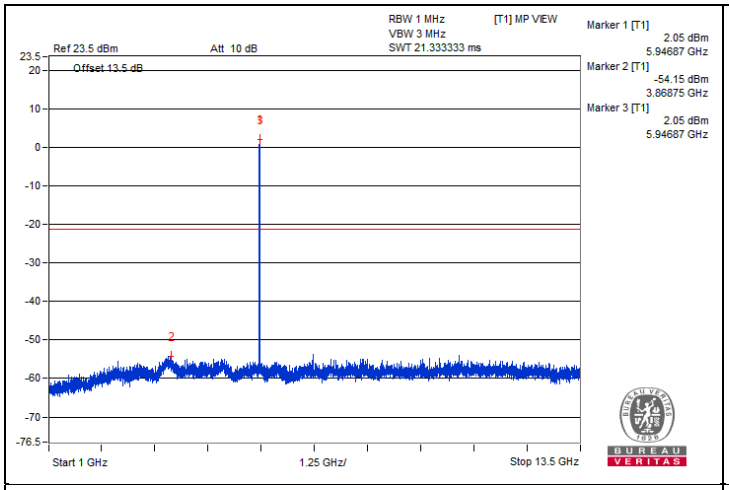
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
2.05 dBm
5.94687 GHz
Marker 2 [T1]
-54.15 dBm
3.86875 GHz
Marker 3 [T1]
2.05 dBm
5.94687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

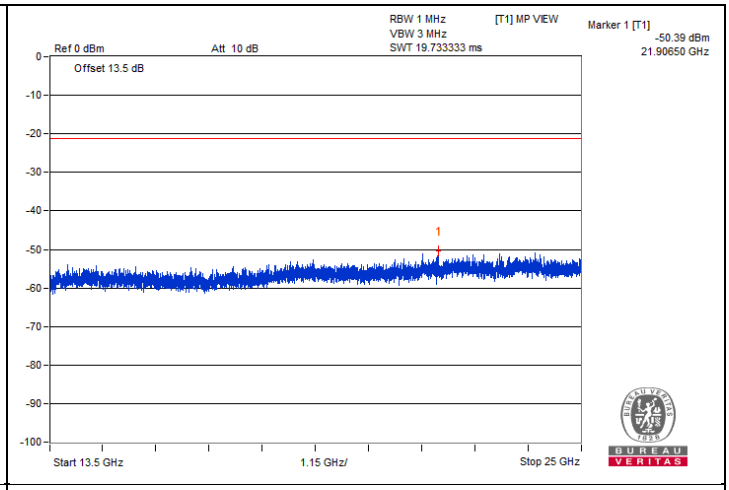
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.39 dBm
21.90650 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

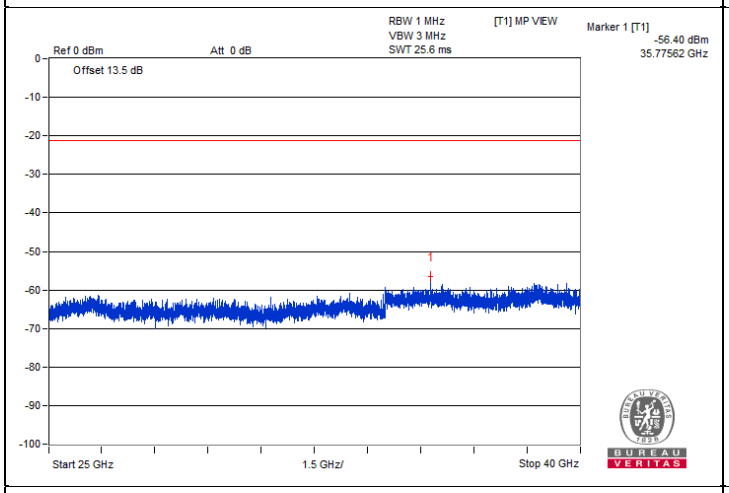
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-56.40 dBm
35.77562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

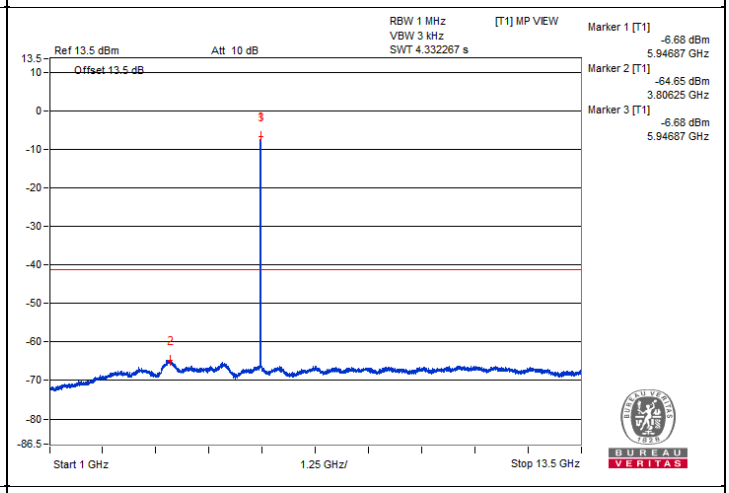
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.68 dBm
5.94687 GHz
Marker 2 [T1]
-64.65 dBm
3.80625 GHz
Marker 3 [T1]
-6.68 dBm
5.94687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

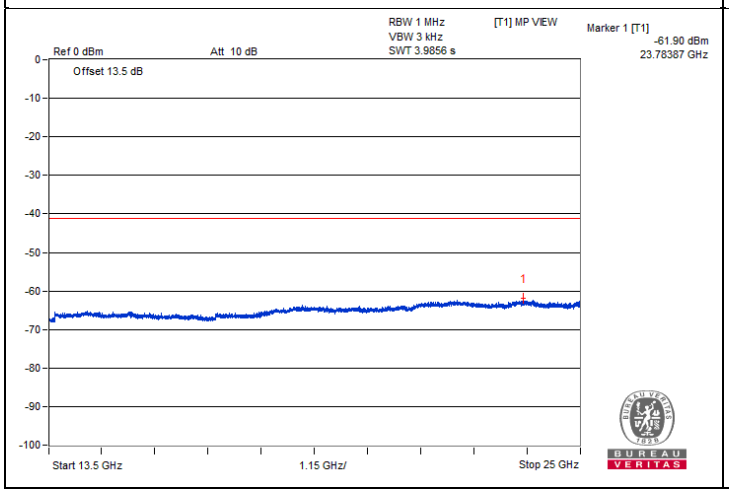
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-61.90 dBm
23.78387 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

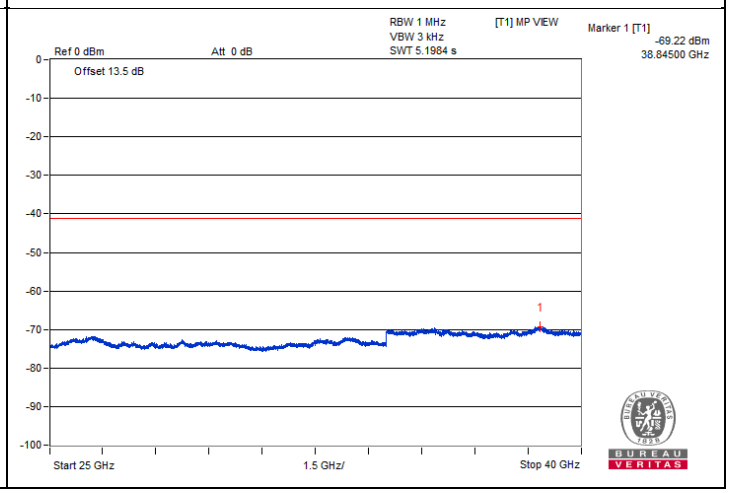
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.22 dBm
38.84500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5899.52	54.65 PK	88.2	-33.55	-45.37	4.76	-40.61
2	#5837.52	43.39 AV	68.2	-24.81	-56.63	4.76	-51.87

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

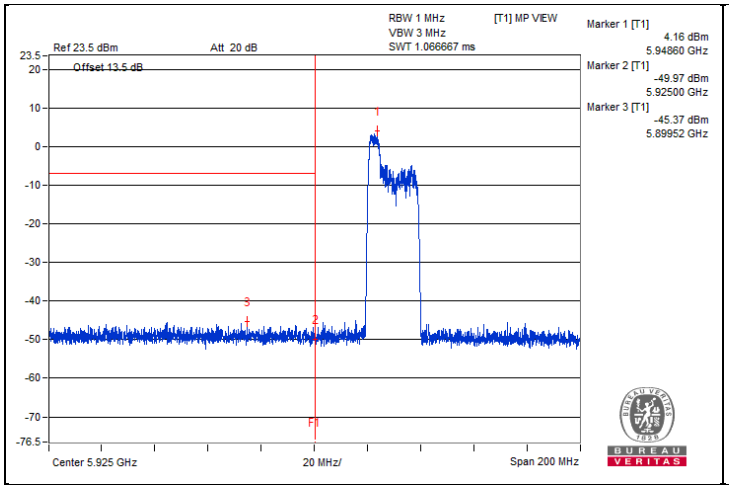

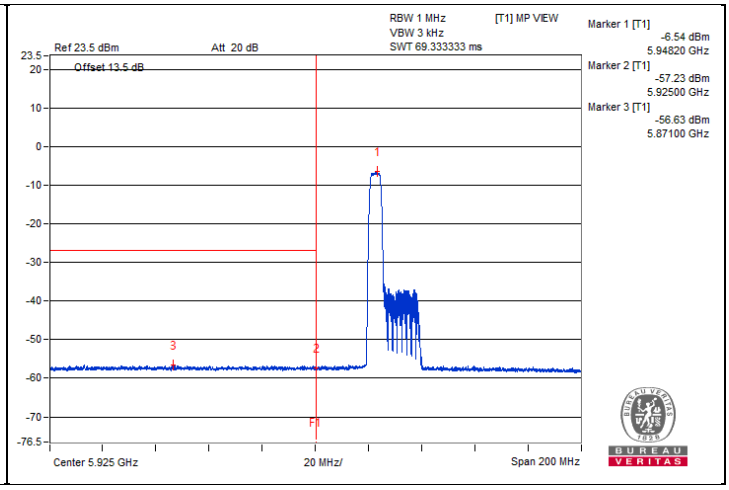

20 MHz Preamble 802.11ax (RU52) - Channel 45

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12343.75	44.17 PK	74	-29.83	-55.85	4.76	-51.09
2	12348.43	33.23 AV	54	-20.77	-66.79	4.76	-62.03
3	18521.18	46.76 PK	74	-27.24	-53.26	4.76	-48.50
4	18532.68	35.27 AV	54	-18.73	-64.75	4.76	-59.99

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

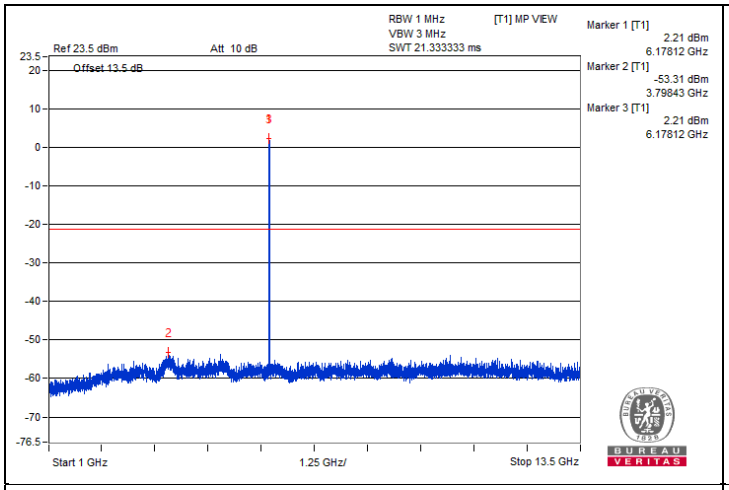
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
2.21 dBm
6.17812 GHz
Marker 2 [T1]
-53.31 dBm
3.79843 GHz
Marker 3 [T1]
2.21 dBm
6.17812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

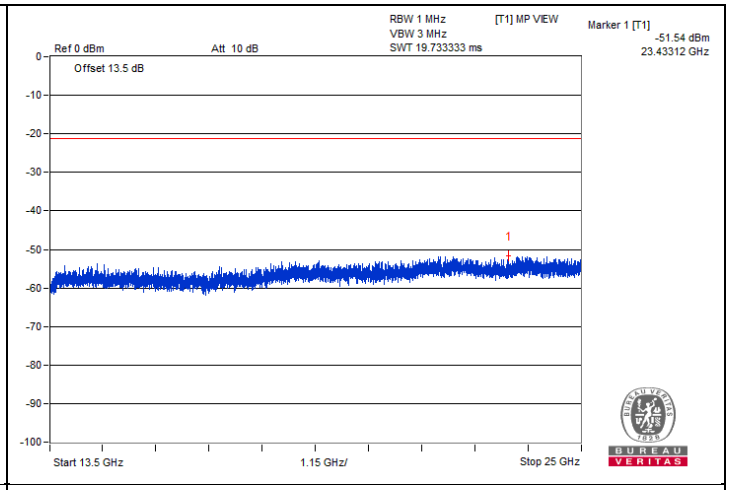
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.54 dBm
23.43312 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

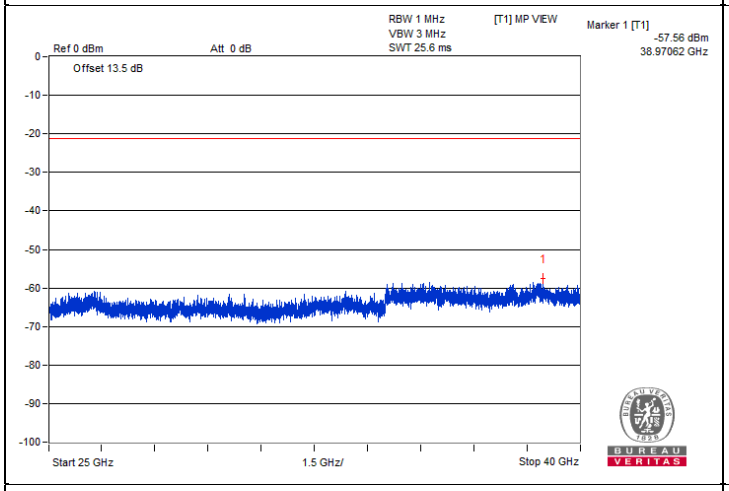
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.56 dBm
38.97062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

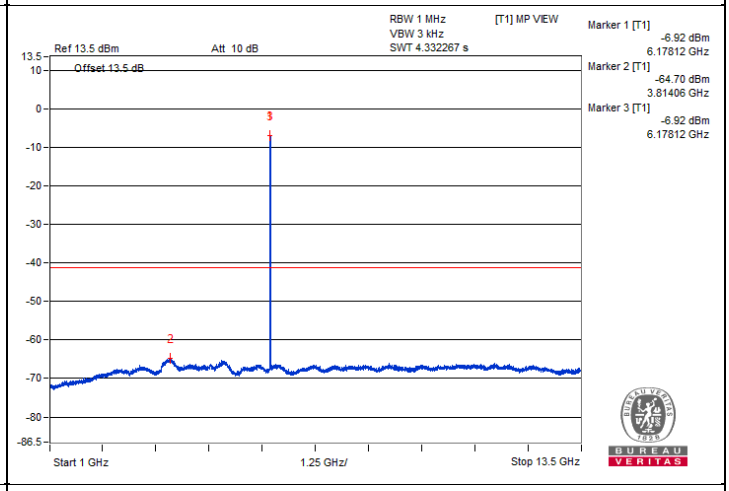
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.92 dBm
6.17812 GHz
Marker 2 [T1]
-64.70 dBm
3.81406 GHz
Marker 3 [T1]
-6.92 dBm
6.17812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

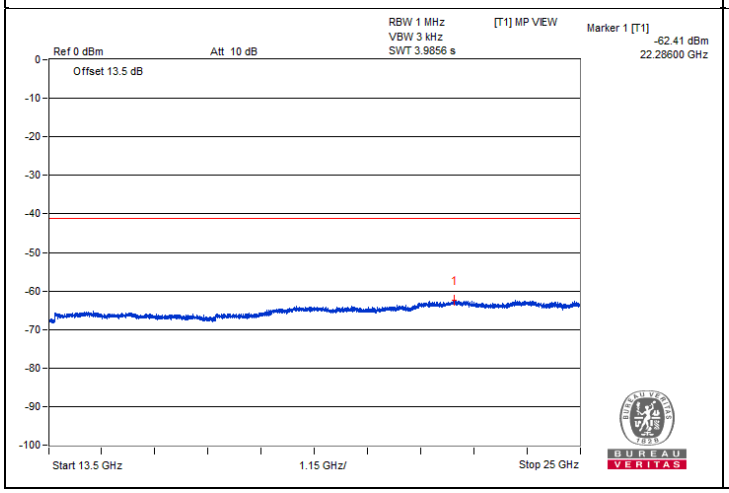
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.41 dBm
22.28600 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

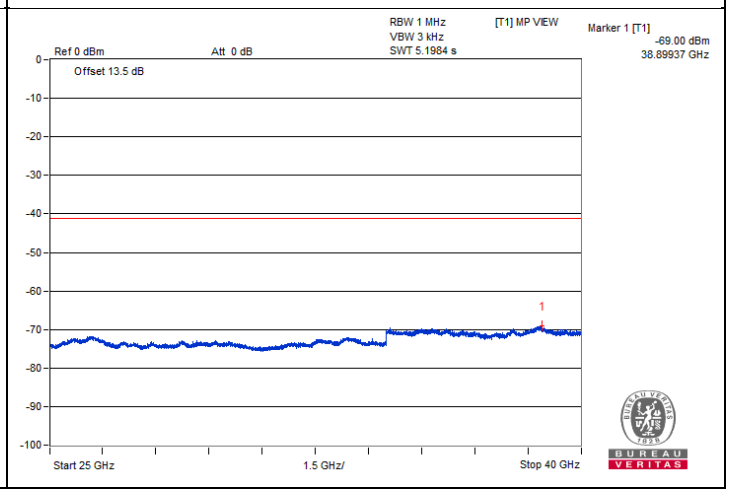
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.00 dBm
38.89937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12835.93	42.64 PK	88.2	-45.56	-57.38	4.76	-52.62
2	#12839.06	32.41 AV	68.2	-35.79	-67.61	4.76	-62.85
3	19244.25	45.64 PK	74	-28.36	-54.38	4.76	-49.62
4	19239.93	35.92 AV	54	-18.08	-64.1	4.76	-59.34

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

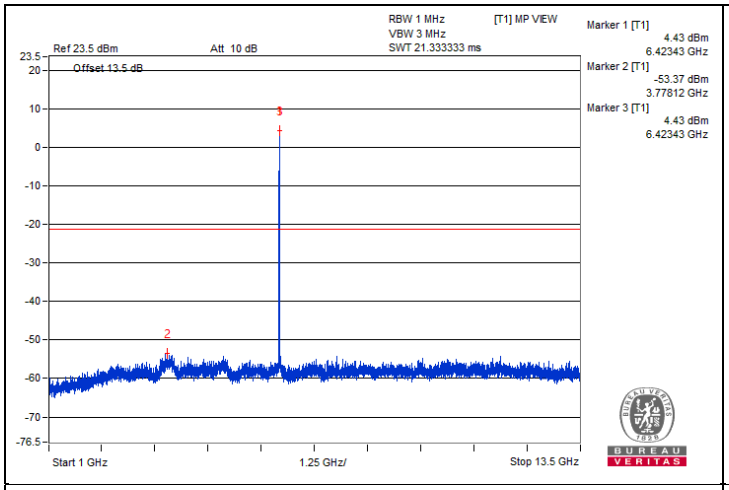
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
4.43 dBm
6.42343 GHz
Marker 2 [T1]
-53.37 dBm
3.77812 GHz
Marker 3 [T1]
4.43 dBm
6.42343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

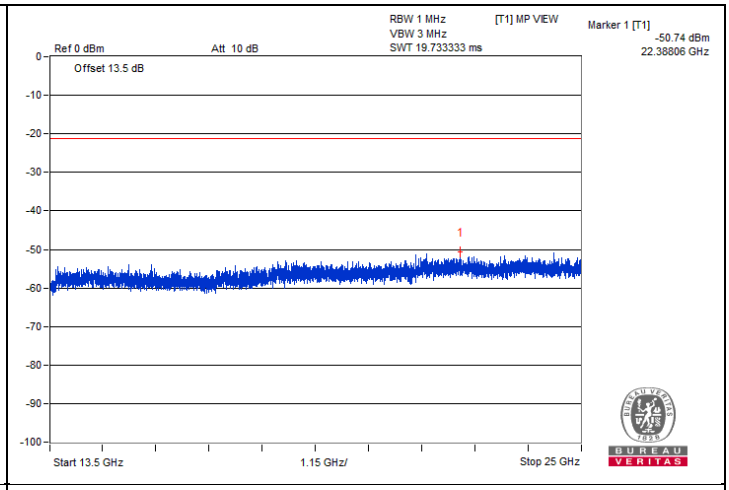
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.74 dBm
22.38806 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

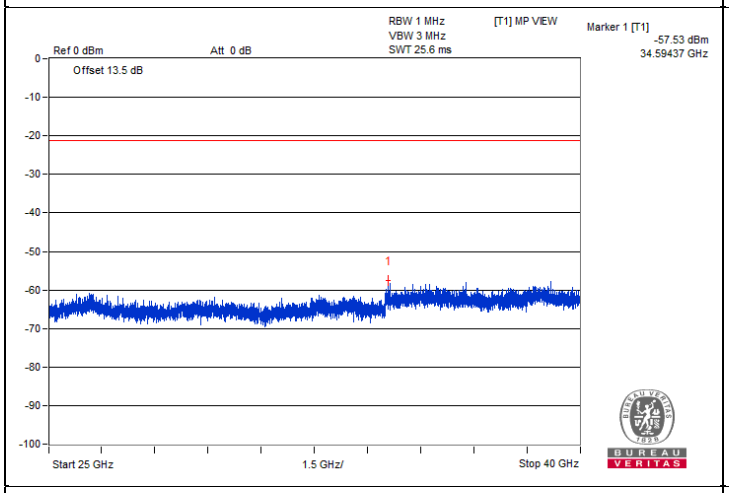
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.53 dBm
34.59437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

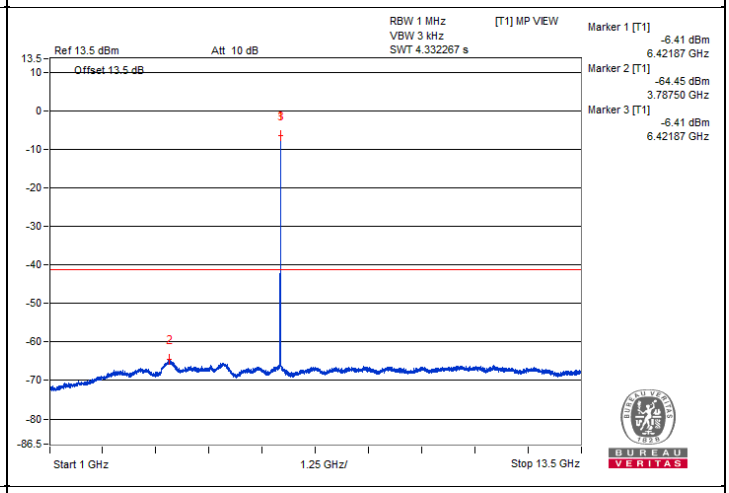
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.41 dBm
6.42187 GHz
Marker 2 [T1]
-64.45 dBm
3.78750 GHz
Marker 3 [T1]
-6.41 dBm
6.42187 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

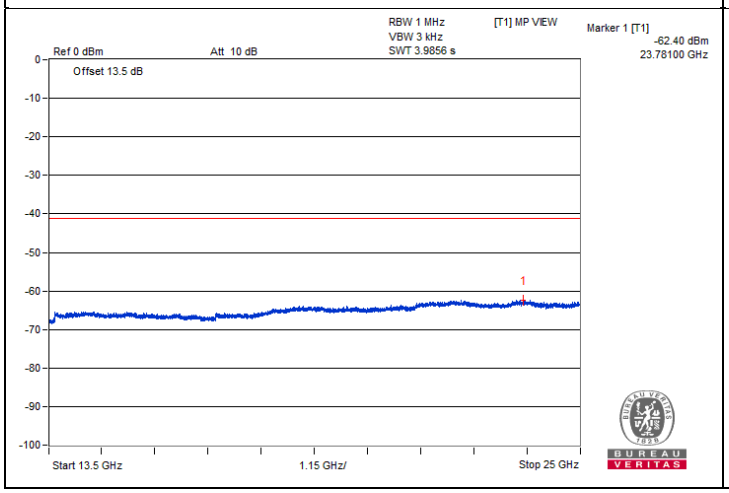
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.40 dBm
23.78100 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

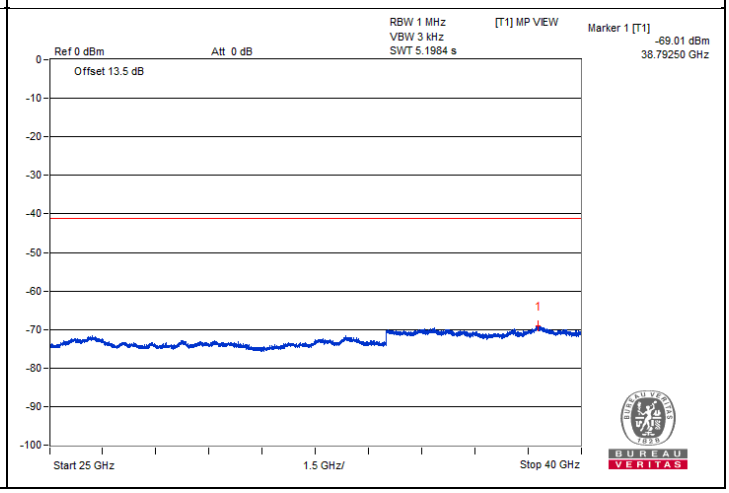
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.01 dBm
38.79250 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12878.12	44.12 PK	88.2	-44.08	-55.9	4.76	-51.14
2	#12865.62	32.05 AV	68.2	-36.15	-67.97	4.76	-63.21
3	19296	45.14 PK	74	-28.86	-54.88	4.76	-50.12
4	19308.93	35.97 AV	54	-18.03	-64.05	4.76	-59.29

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

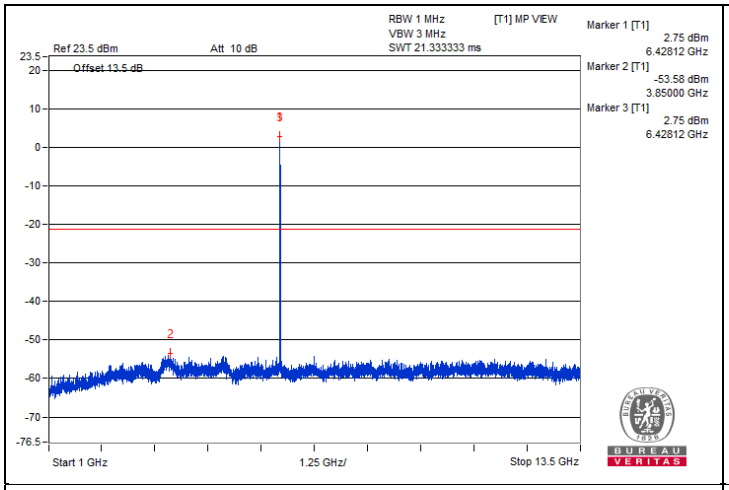
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
2.75 dBm
6.42812 GHz
Marker 2 [T1]
-53.58 dBm
3.85000 GHz
Marker 3 [T1]
2.75 dBm
6.42812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

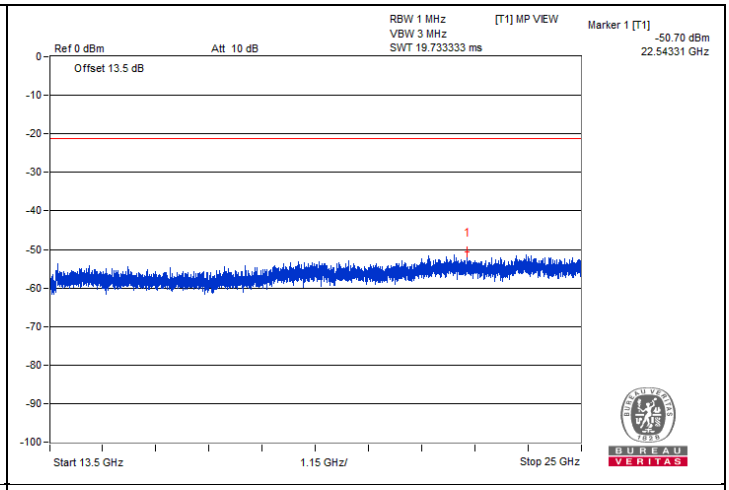
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.70 dBm
22.54331 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

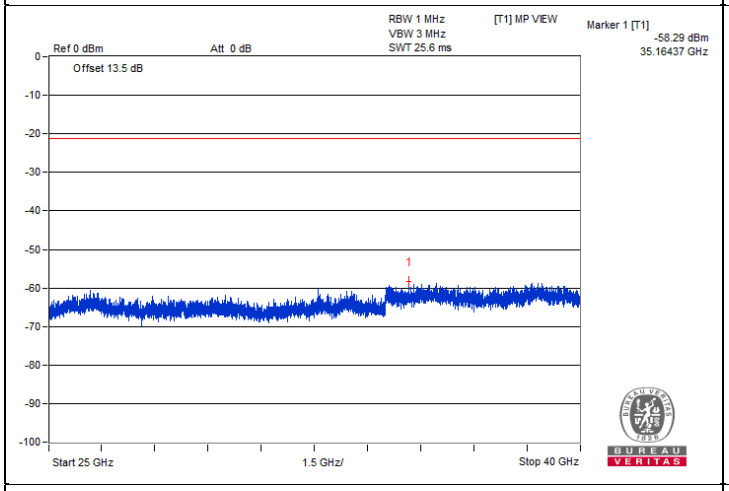
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.29 dBm
35.16437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

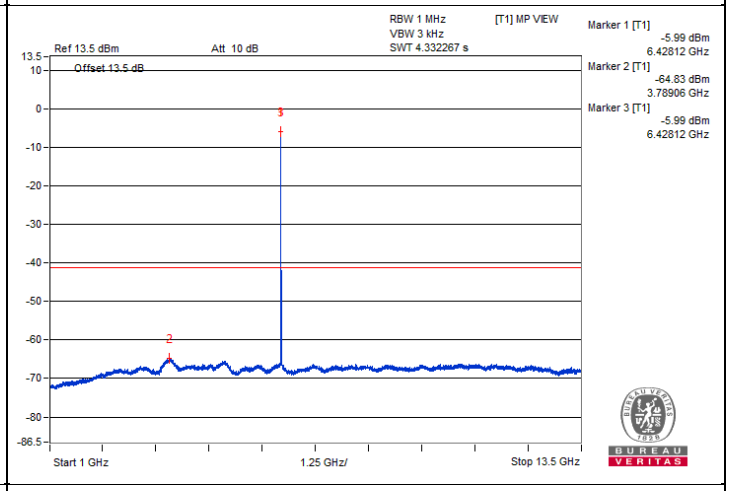
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-5.99 dBm
6.42812 GHz
Marker 2 [T1]
-64.83 dBm
3.78906 GHz
Marker 3 [T1]
-5.99 dBm
6.42812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

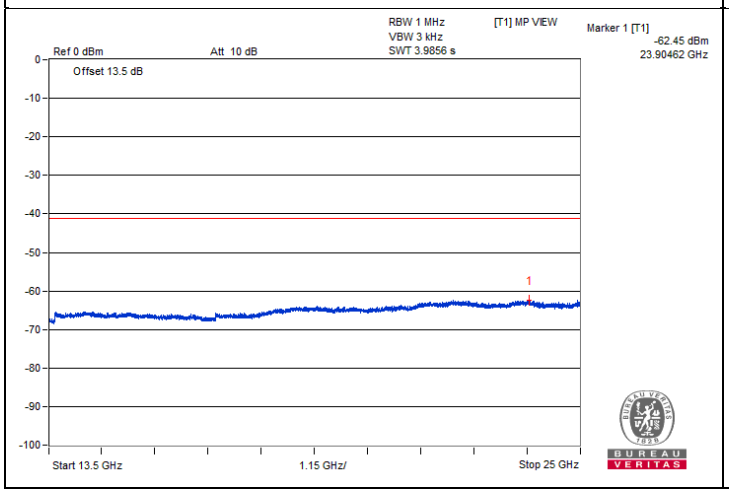
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.45 dBm
23.90462 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

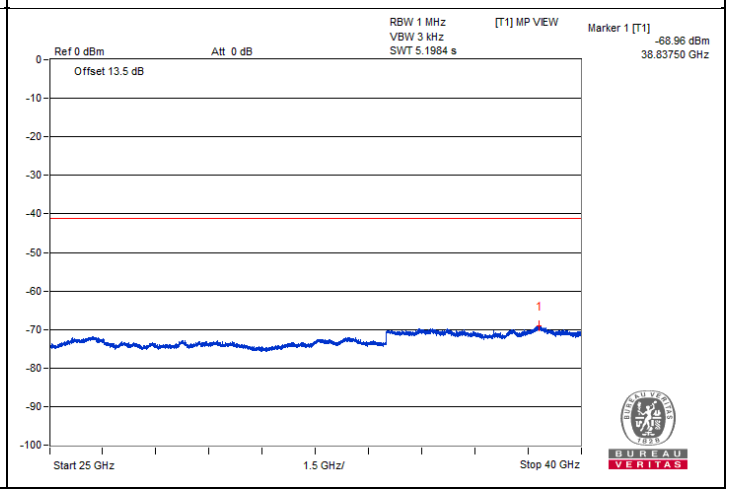
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.96 dBm
38.83750 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 105

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12951.56	42.9 PK	88.2	-45.3	-57.12	4.76	-52.36
2	#12945.31	31.69 AV	68.2	-36.51	-68.33	4.76	-63.57
3	19416.75	45.5 PK	74	-28.5	-54.52	4.76	-49.76
4	19431.12	35.56 AV	54	-18.44	-64.46	4.76	-59.70

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

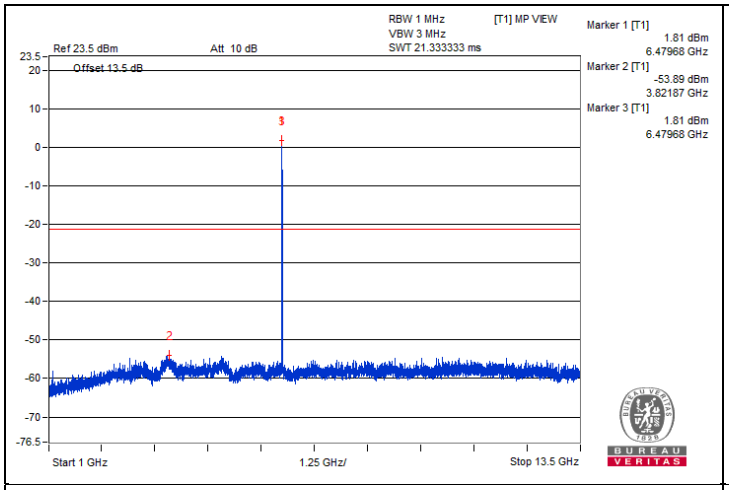
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.81 dBm
6.47968 GHz
Marker 2 [T1]
-53.89 dBm
3.82187 GHz
Marker 3 [T1]
1.81 dBm
6.47968 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

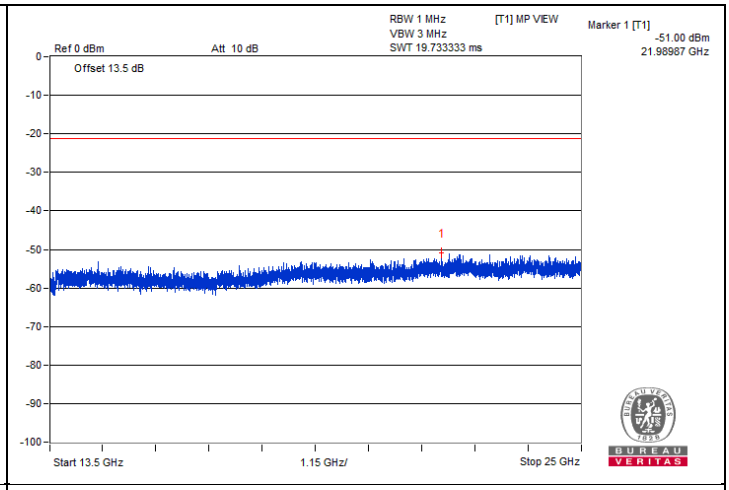
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.00 dBm
21.98987 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

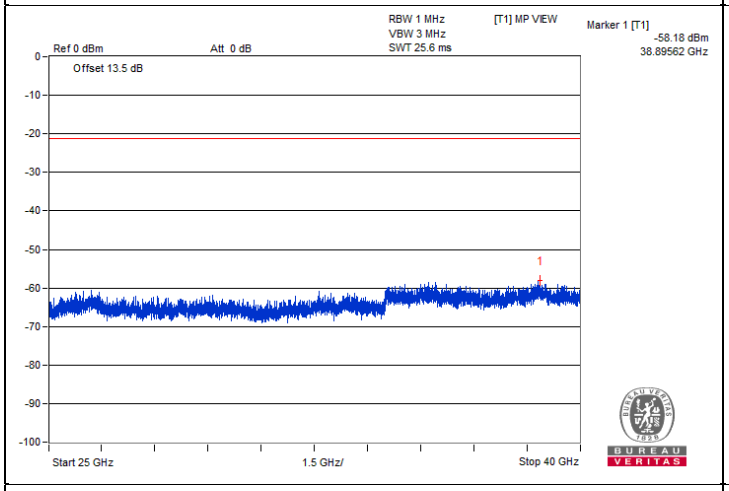
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.18 dBm
38.89562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

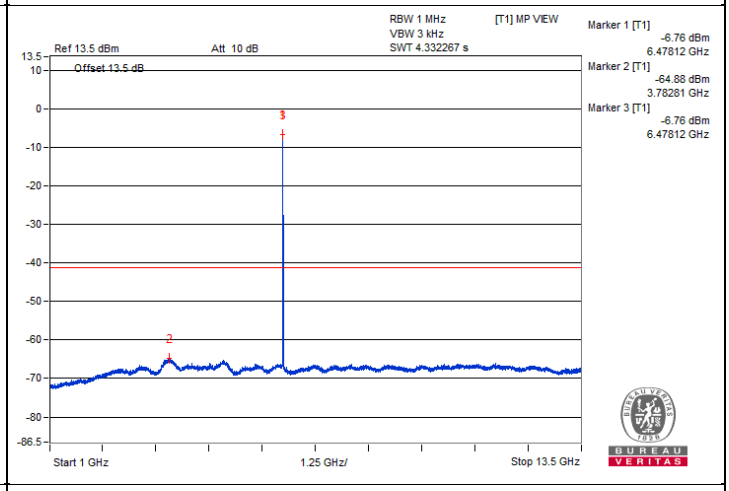
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.76 dBm
6.47812 GHz
Marker 2 [T1]
-64.88 dBm
3.78281 GHz
Marker 3 [T1]
-6.76 dBm
6.47812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

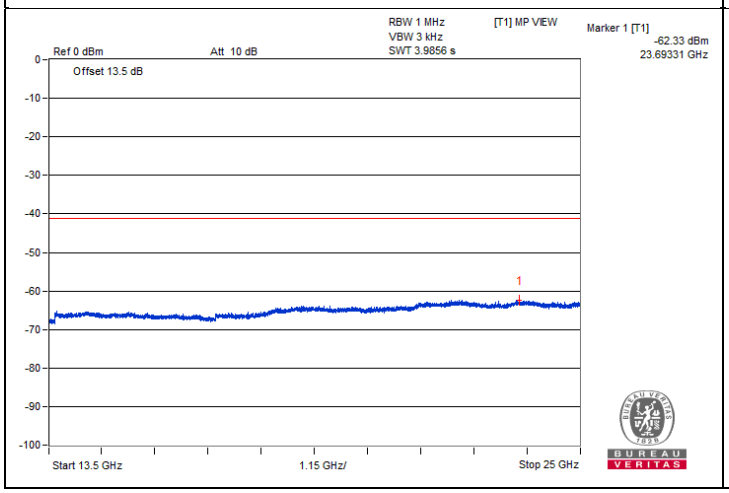
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.33 dBm
23.69331 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

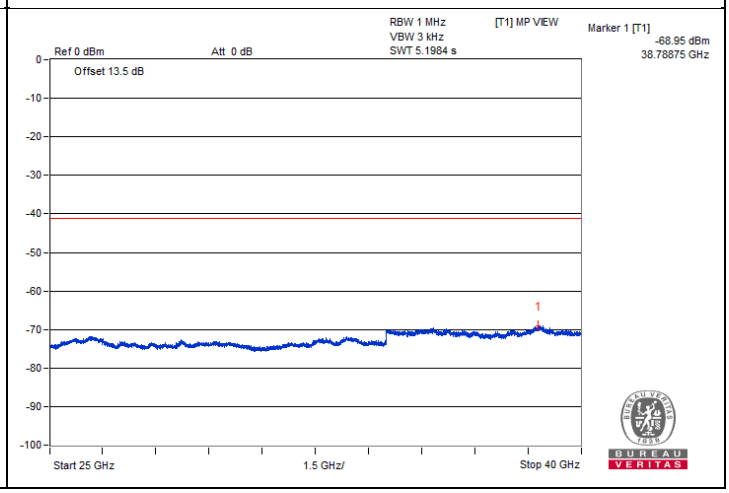
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.95 dBm
38.78875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 113

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13023.43	41.75 PK	88.2	-46.45	-58.27	4.76	-53.51
2	#13032.81	32.05 AV	68.2	-36.15	-67.97	4.76	-63.21
3	19543.25	46.08 PK	74	-27.92	-53.94	4.76	-49.18
4	19550.43	35.42 AV	54	-18.58	-64.6	4.76	-59.84

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

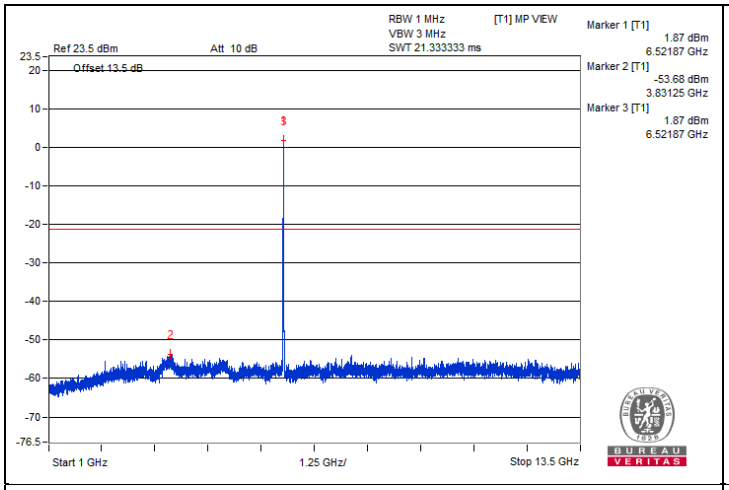
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.87 dBm
6.52187 GHz
Marker 2 [T1]
-53.68 dBm
3.83125 GHz
Marker 3 [T1]
1.87 dBm
6.52187 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

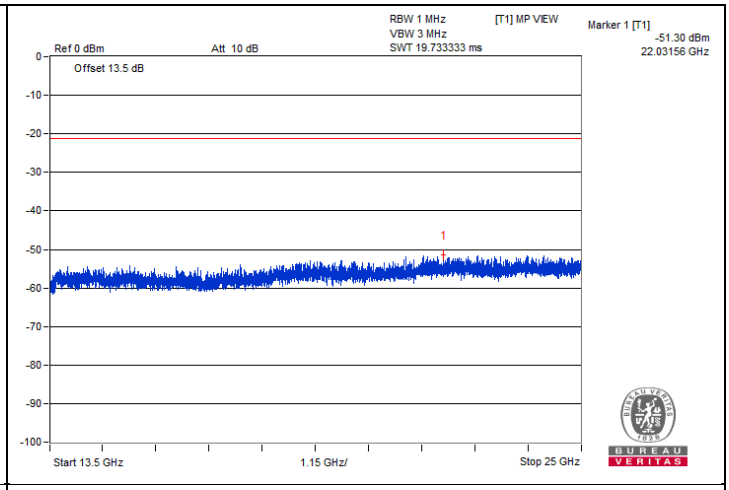
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.30 dBm
22.03156 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

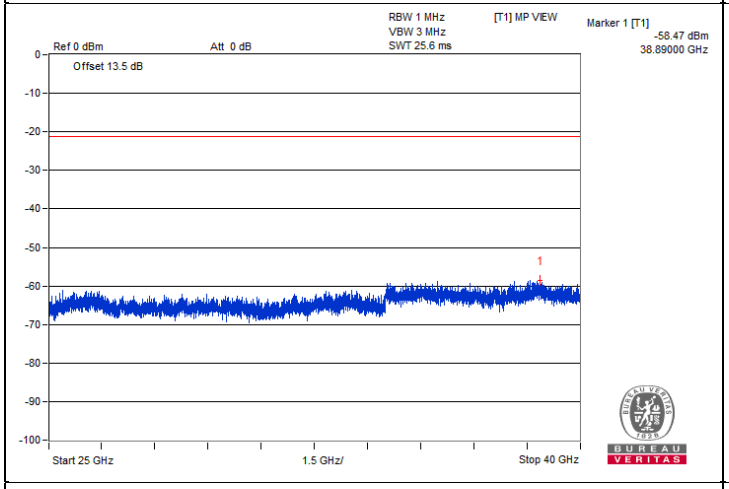
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.47 dBm
38.89000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

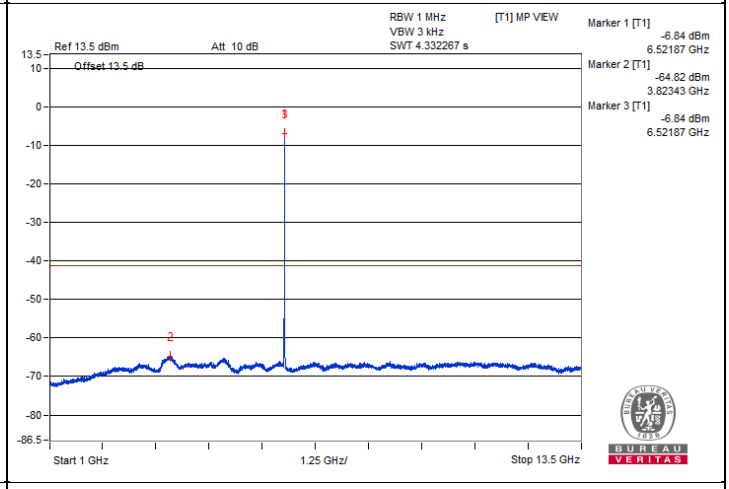
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.84 dBm
6.52187 GHz
Marker 2 [T1]
-64.82 dBm
3.82343 GHz
Marker 3 [T1]
-6.84 dBm
6.52187 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

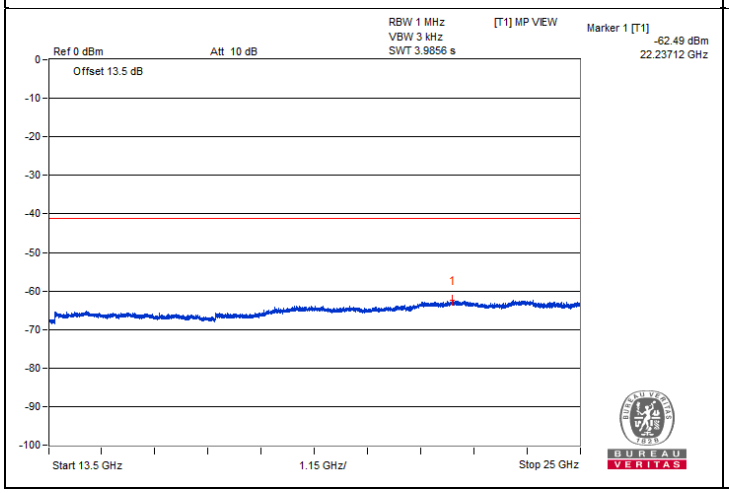
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.49 dBm
22.23712 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

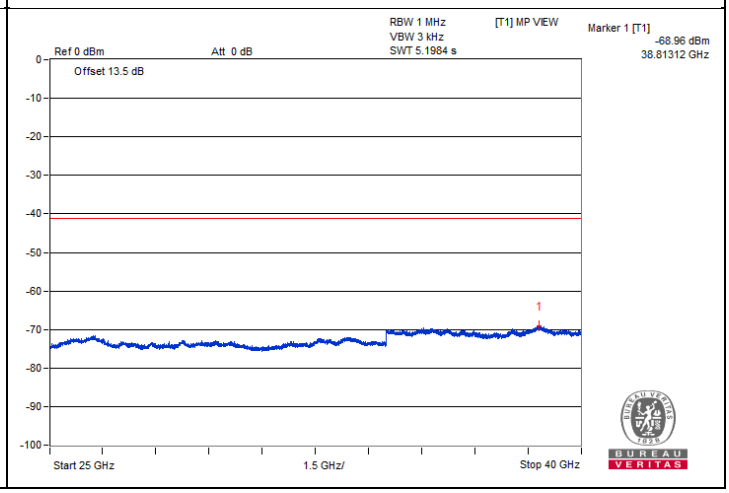
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.96 dBm
38.81312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13067.18	42.88 PK	88.2	-45.32	-57.14	4.76	-52.38
2	#13078.12	31.95 AV	68.2	-36.25	-68.07	4.76	-63.31
3	19599.31	44.92 PK	74	-29.08	-55.1	4.76	-50.34
4	19606.5	34.81 AV	54	-19.19	-65.21	4.76	-60.45

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

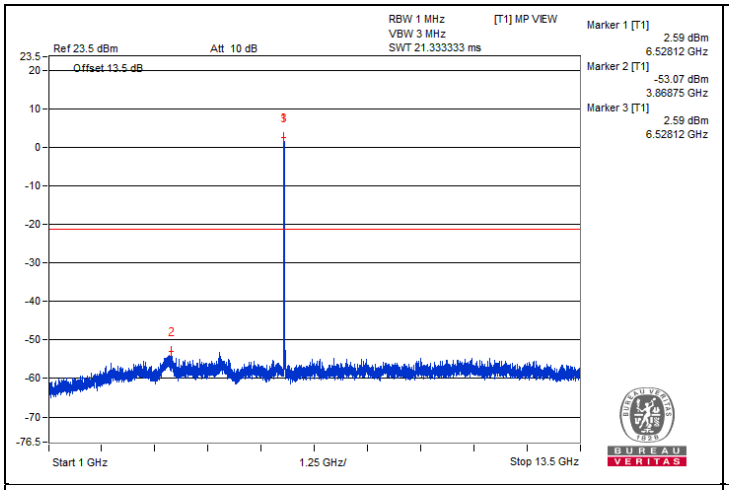
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
2.59 dBm
6.52812 GHz
Marker 2 [T1]
-53.07 dBm
3.86875 GHz
Marker 3 [T1]
2.59 dBm
6.52812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

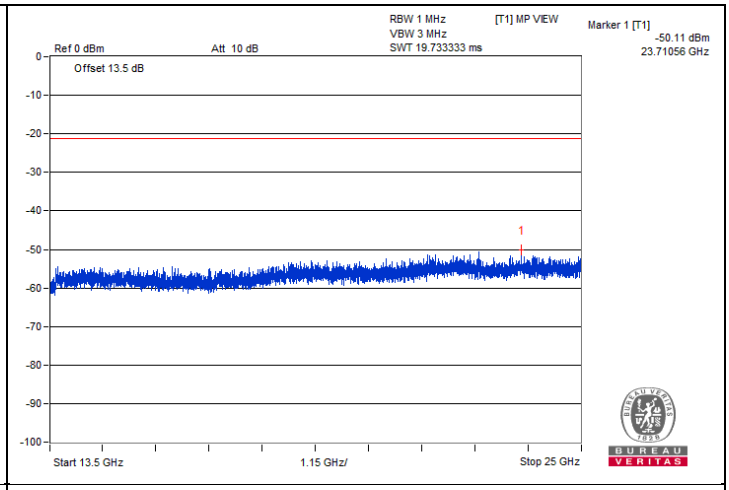
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.11 dBm
23.71056 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

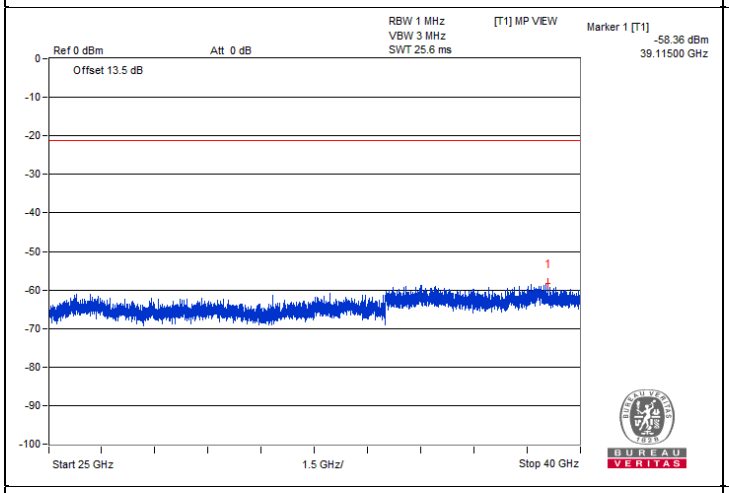
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.36 dBm
39.11500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

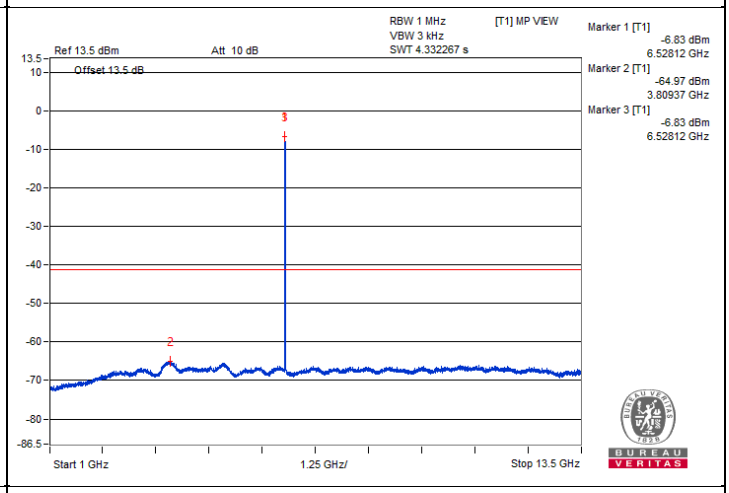
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.83 dBm
6.52812 GHz
Marker 2 [T1]
-64.97 dBm
3.80937 GHz
Marker 3 [T1]
-6.83 dBm
6.52812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

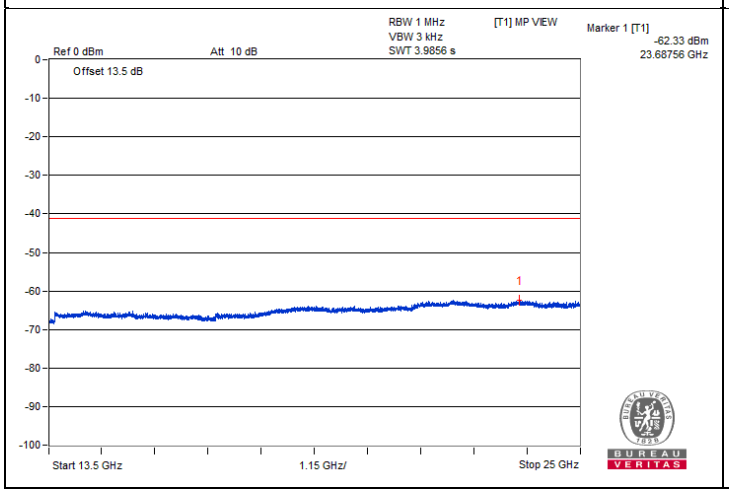
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.33 dBm
23.68756 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

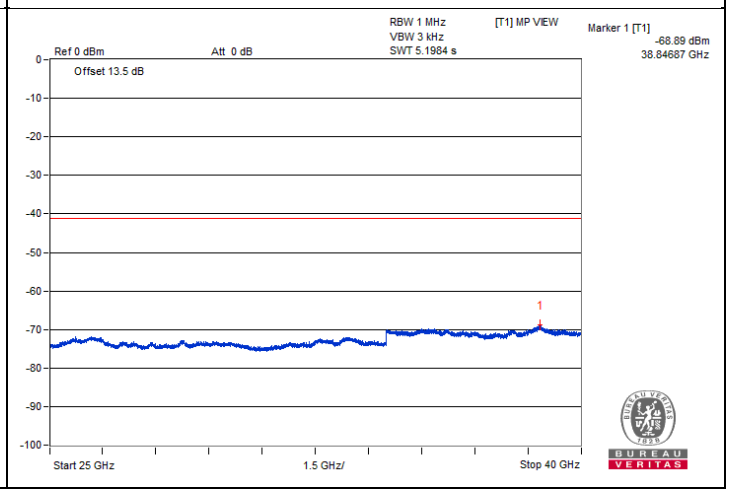
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.89 dBm
38.84687 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13385.93	41.99 PK	74	-32.01	-58.03	4.76	-53.27
2	13400	32.09 AV	54	-21.91	-67.93	4.76	-63.17
3	20078	45.13 PK	74	-28.87	-54.89	4.76	-50.13
4	20093.81	35.57 AV	54	-18.43	-64.45	4.76	-59.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

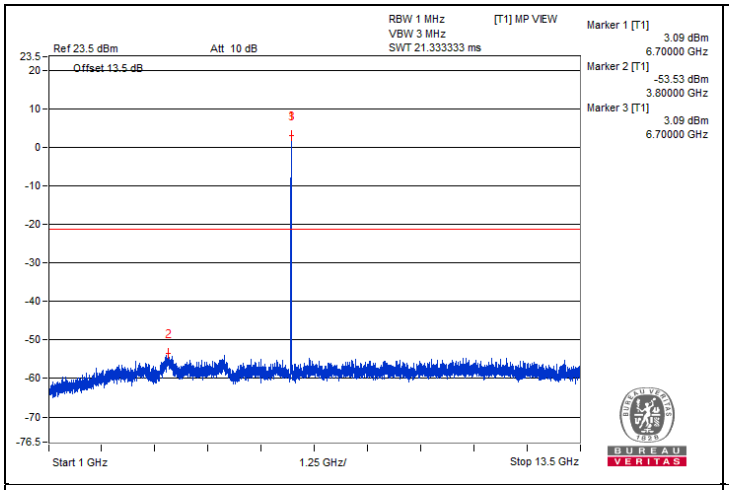
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.09 dBm
6.70000 GHz
Marker 2 [T1]
-53.53 dBm
3.80000 GHz
Marker 3 [T1]
3.09 dBm
6.70000 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

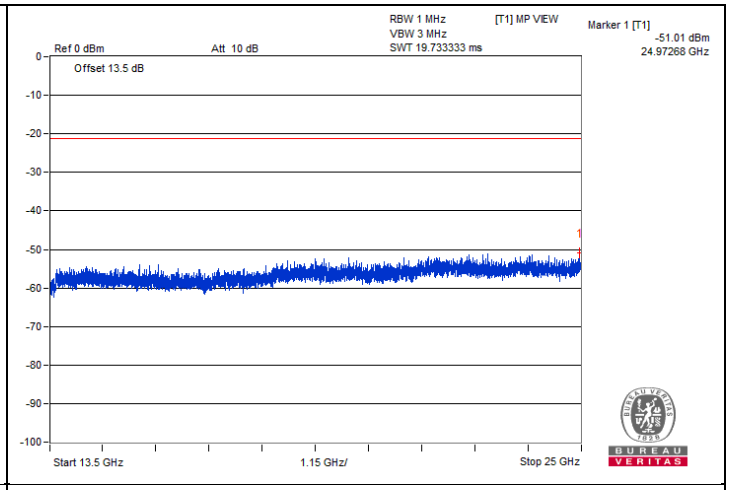
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.01 dBm
24.97268 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

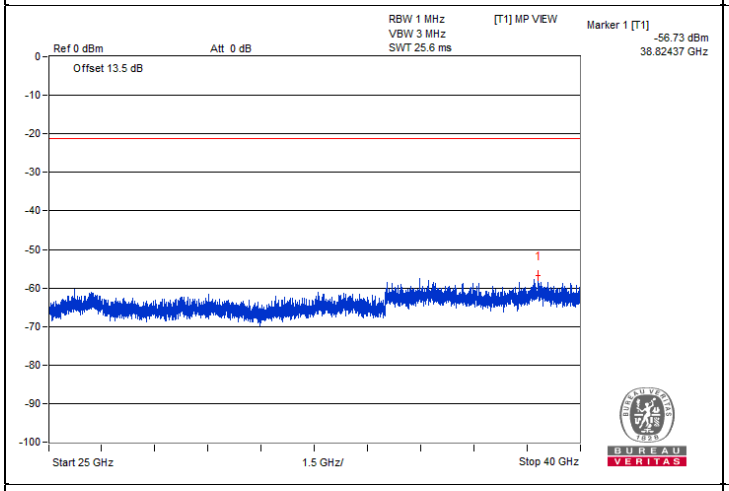
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-56.73 dBm
38.82437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

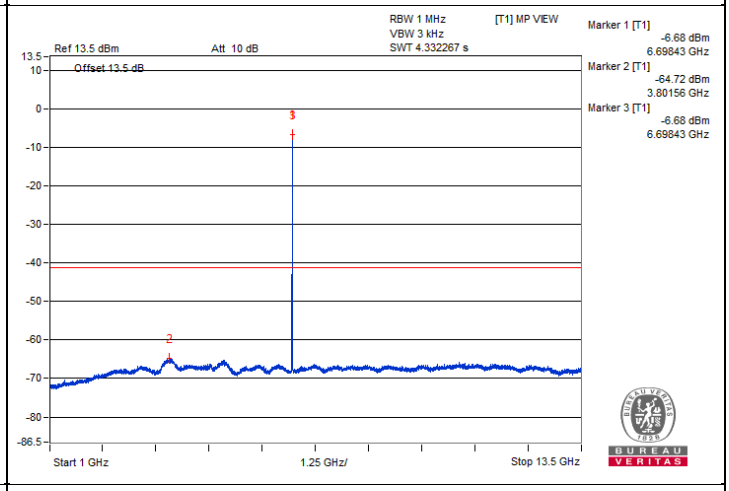
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.68 dBm
6.69843 GHz
Marker 2 [T1]
-64.72 dBm
3.80156 GHz
Marker 3 [T1]
-6.68 dBm
6.69843 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

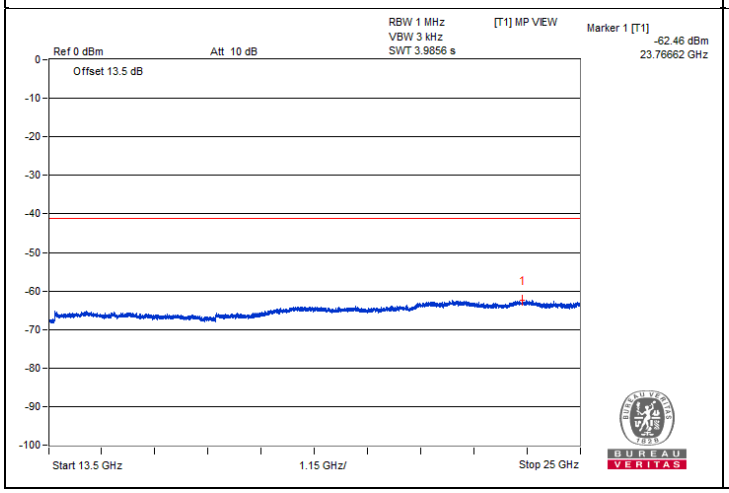
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.46 dBm
23.76662 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

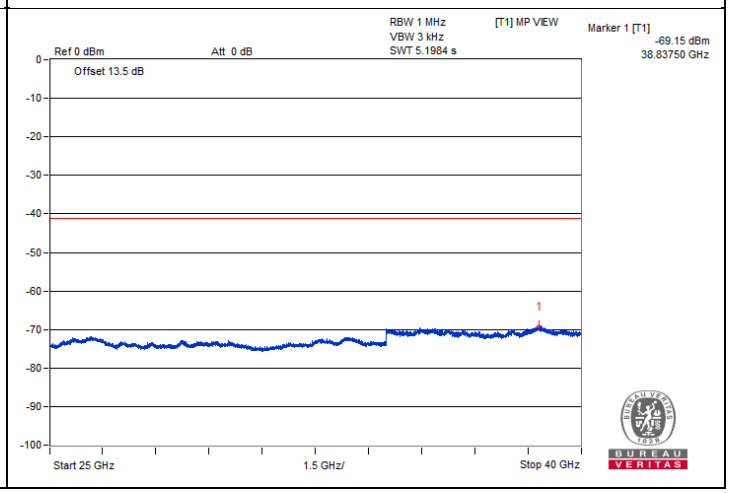
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.15 dBm
38.83750 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13705.56	44 PK	88.2	-44.2	-56.02	4.76	-51.26
2	#13708.43	34.2 AV	68.2	-34	-65.82	4.76	-61.06
3	20566.75	45.82 PK	74	-28.18	-54.2	4.76	-49.44
4	20562.43	35.67 AV	54	-18.33	-64.35	4.76	-59.59

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

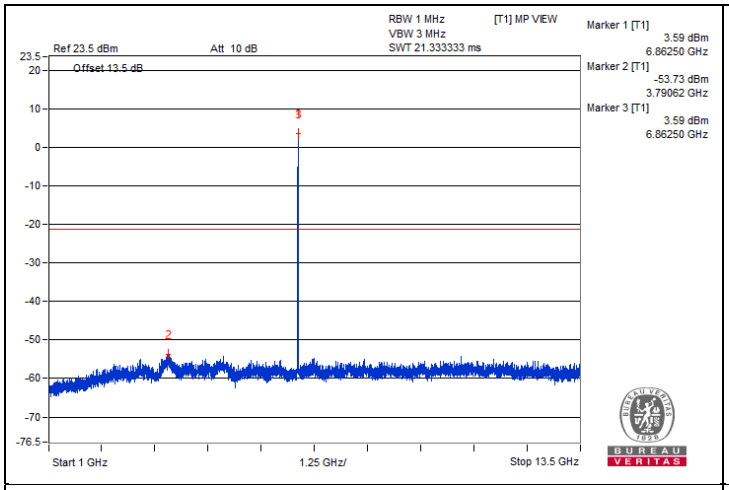
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.59 dBm
6.86250 GHz
Marker 2 [T1]
-53.73 dBm
3.79062 GHz
Marker 3 [T1]
3.59 dBm
6.86250 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

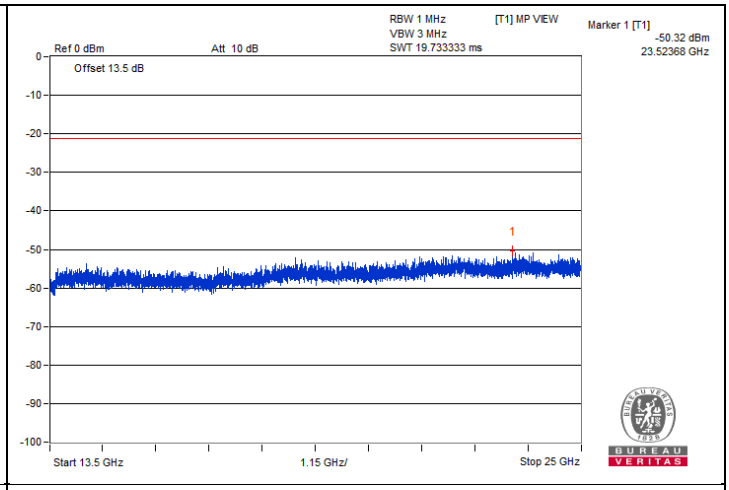
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.32 dBm
23.52368 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

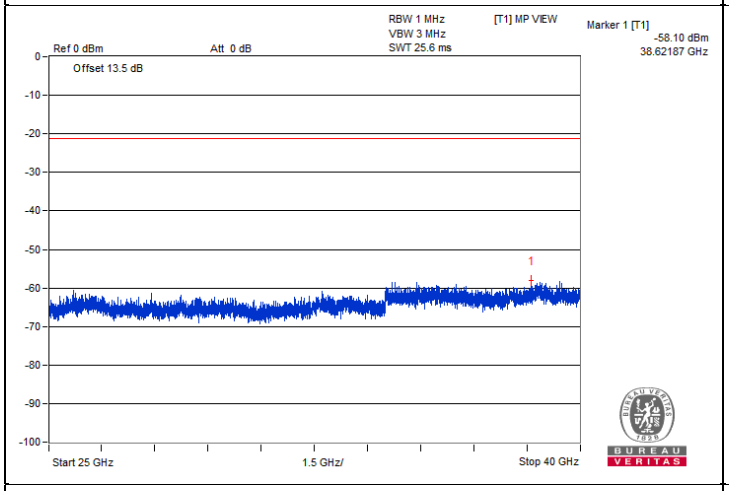
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.10 dBm
38.62187 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

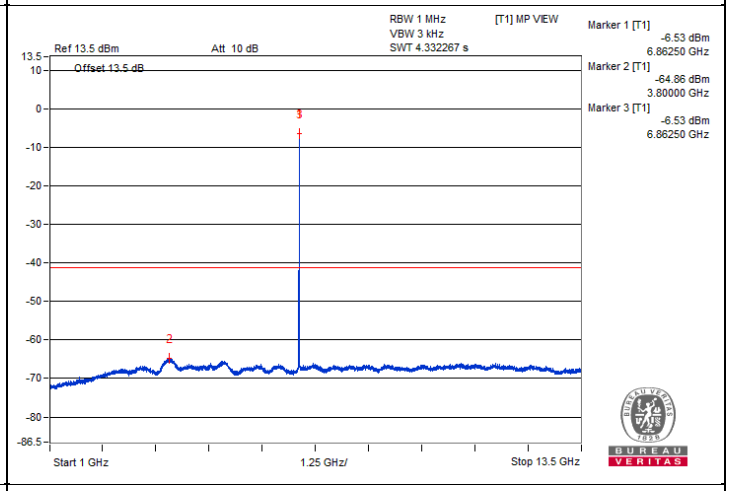
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.53 dBm
6.86250 GHz
Marker 2 [T1]
-64.86 dBm
3.80000 GHz
Marker 3 [T1]
-6.53 dBm
6.86250 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

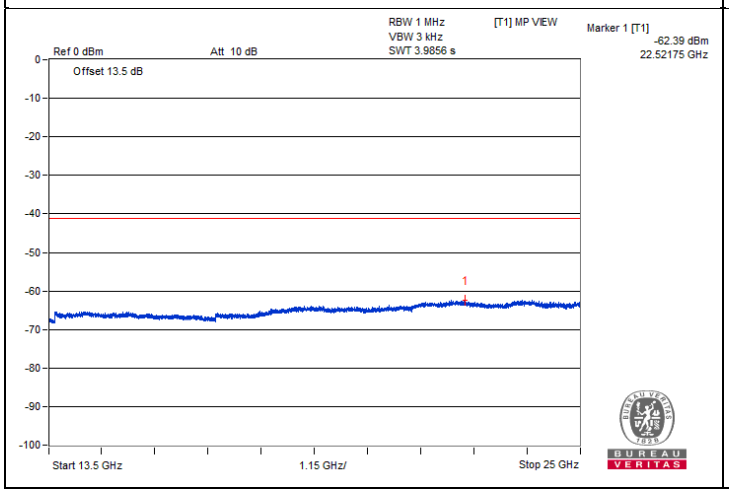
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.39 dBm
22.52175 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

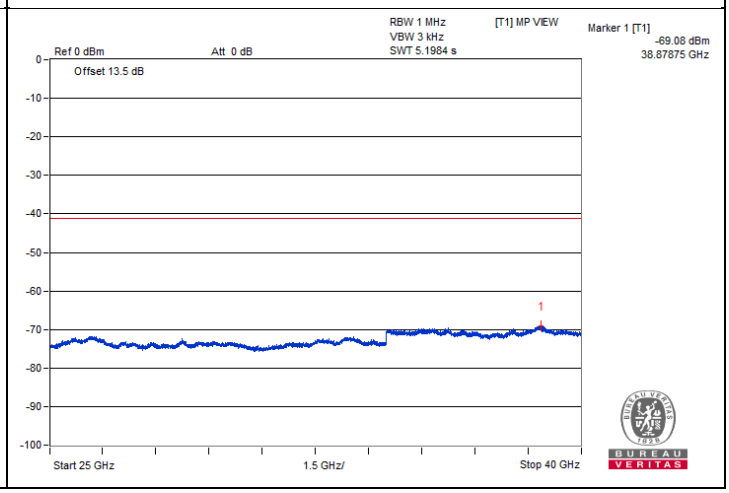
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.08 dBm
38.87875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 185

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13758.75	43.76 PK	88.2	-44.44	-56.26	4.76	-51.50
2	#13754.43	34.12 AV	68.2	-34.08	-65.9	4.76	-61.14
3	20625.68	45.41 PK	74	-28.59	-54.61	4.76	-49.85
4	20621.37	35.45 AV	54	-18.55	-64.57	4.76	-59.81

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

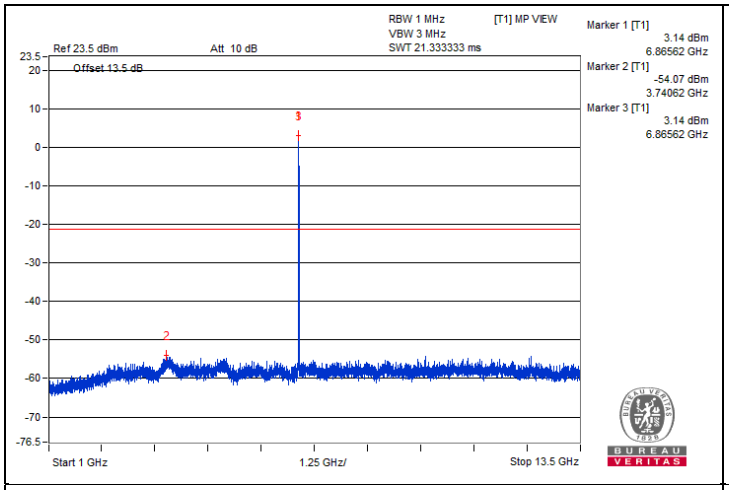
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.14 dBm
6.86562 GHz
Marker 2 [T1]
-54.07 dBm
3.74062 GHz
Marker 3 [T1]
3.14 dBm
6.86562 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

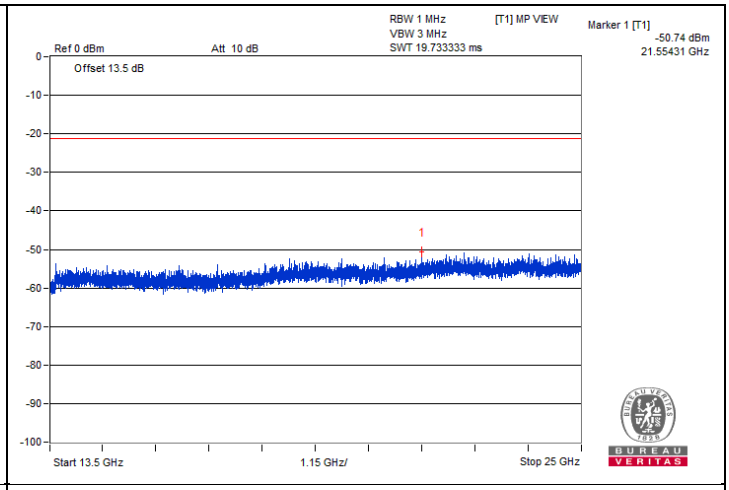
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.74 dBm
21.55431 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

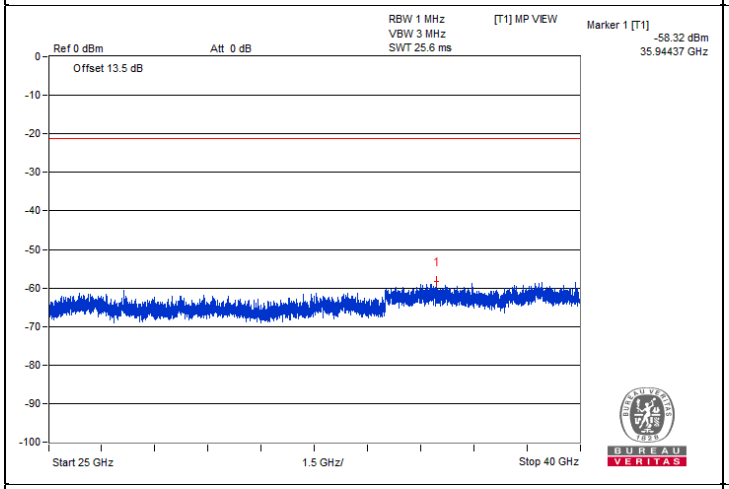
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.32 dBm
35.94437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

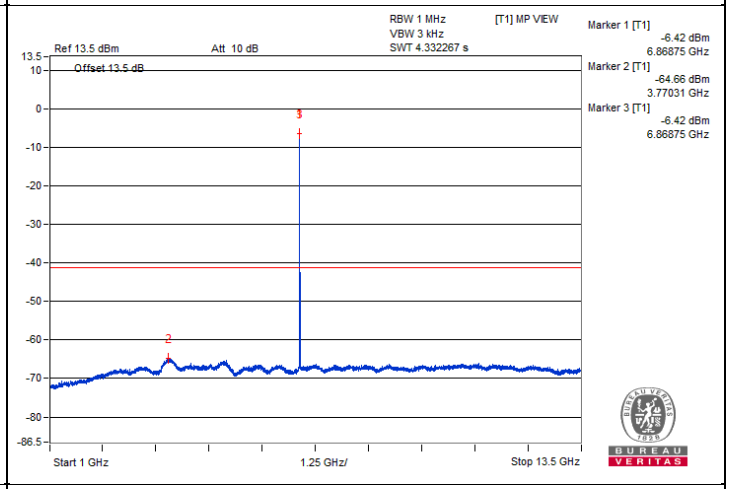
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.42 dBm
6.86875 GHz
Marker 2 [T1]
-64.66 dBm
3.77031 GHz
Marker 3 [T1]
-6.42 dBm
6.86875 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

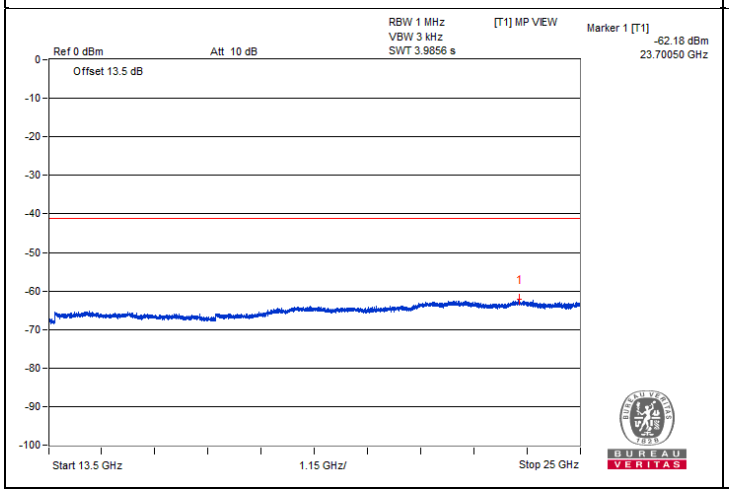
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.18 dBm
23.70050 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

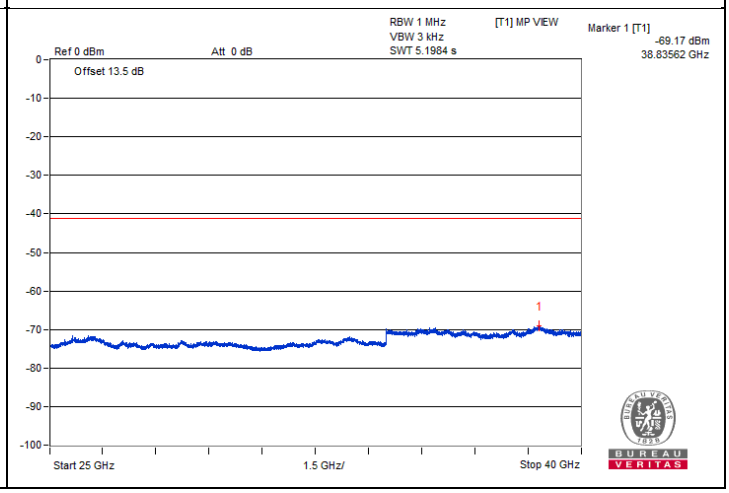
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.17 dBm
38.83562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 209

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13998.81	42.83 PK	88.2	-45.37	-57.19	4.76	-52.43
2	#13987.31	33.84 AV	68.2	-34.36	-66.18	4.76	-61.42
3	20985.06	46 PK	74	-28	-54.02	4.76	-49.26
4	20986.5	35.85 AV	54	-18.15	-64.17	4.76	-59.41

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

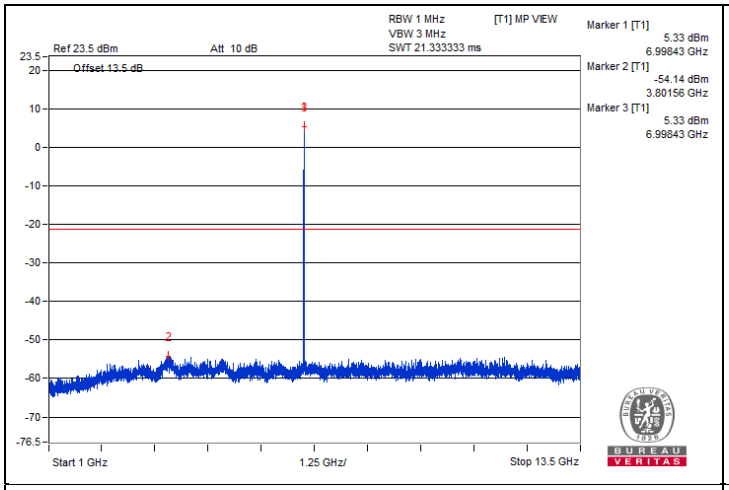
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
5.33 dBm
6.99843 GHz
Marker 2 [T1]
-54.14 dBm
3.80156 GHz
Marker 3 [T1]
5.33 dBm
6.99843 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

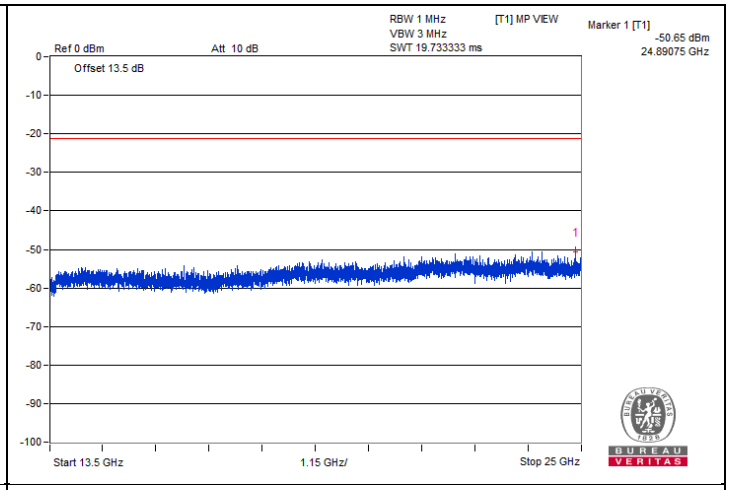
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.65 dBm
24.89075 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

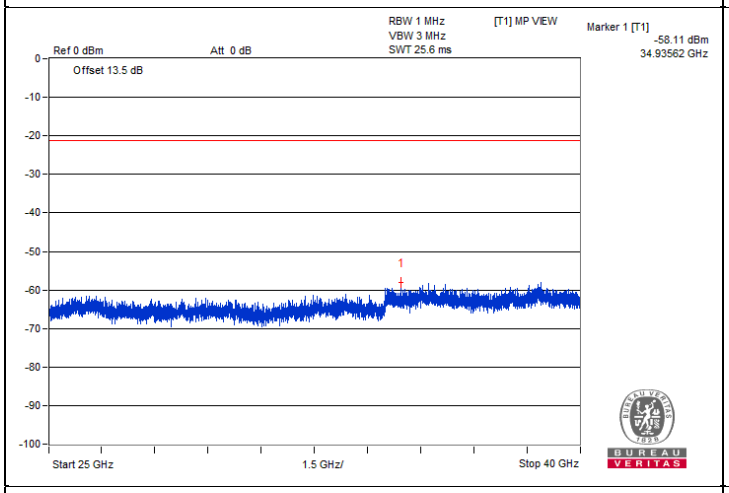
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.11 dBm
34.93562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

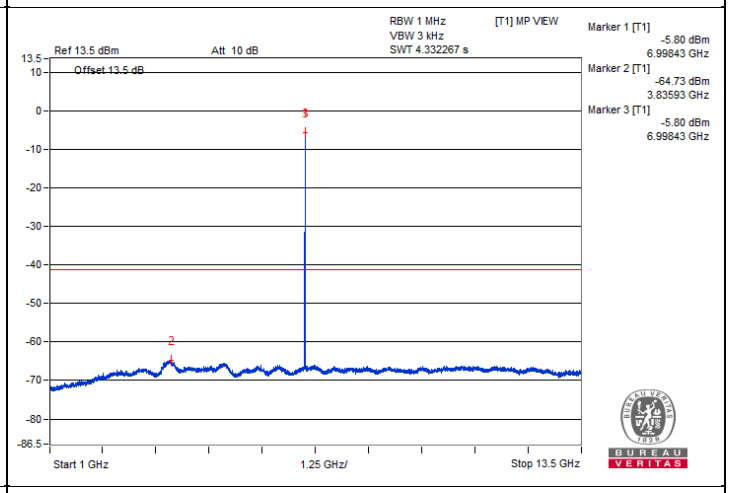
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-5.80 dBm
6.99843 GHz
Marker 2 [T1]
-64.73 dBm
3.83593 GHz
Marker 3 [T1]
-5.80 dBm
6.99843 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

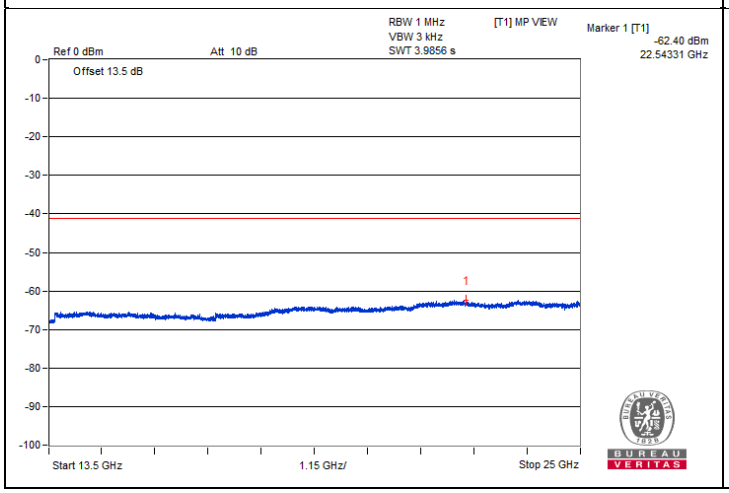
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.40 dBm
22.54331 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

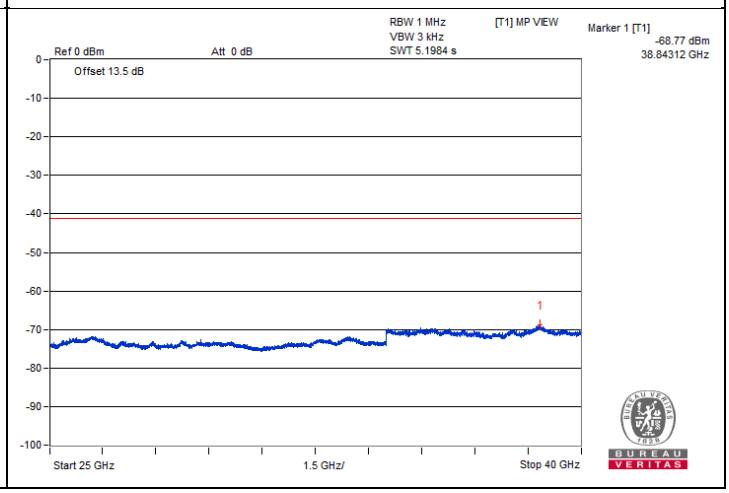
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.77 dBm
38.84312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU52) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14243.18	44.6 PK	88.2	-43.6	-55.42	4.76	-50.66
2	#14244.62	34.94 AV	68.2	-33.26	-65.08	4.76	-60.32
3	21327.18	45.72 PK	74	-28.28	-54.3	4.76	-49.54
4	21354.5	35.67 AV	54	-18.33	-64.35	4.76	-59.59

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

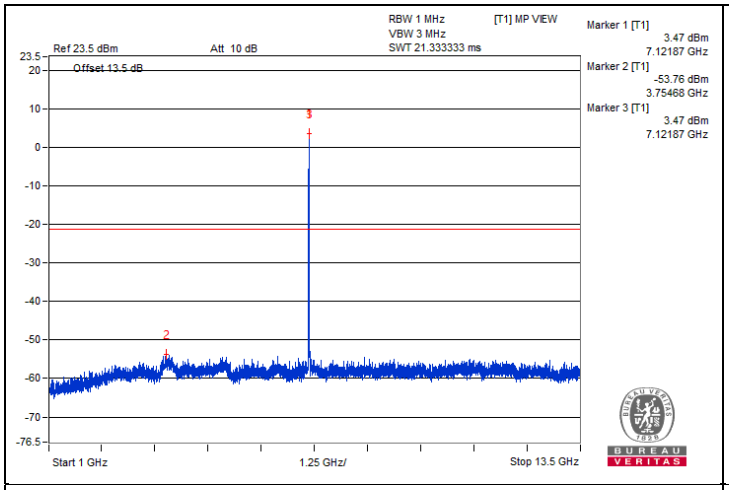
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.47 dBm
7.12187 GHz
Marker 2 [T1]
-53.76 dBm
3.75468 GHz
Marker 3 [T1]
3.47 dBm
7.12187 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

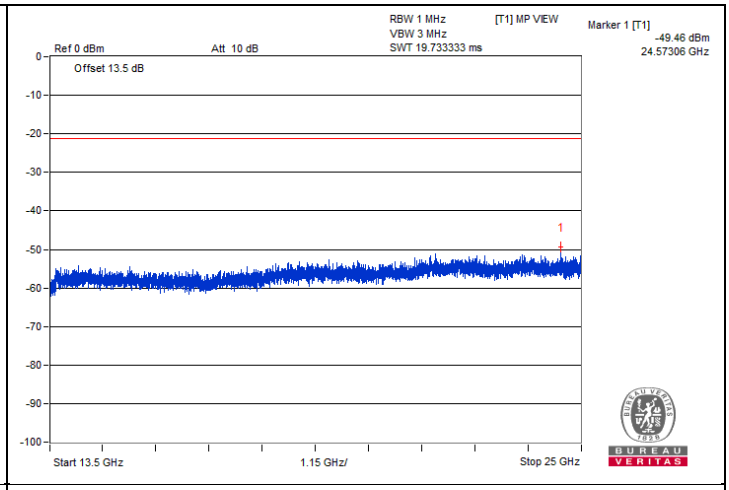
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-49.46 dBm
24.57306 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

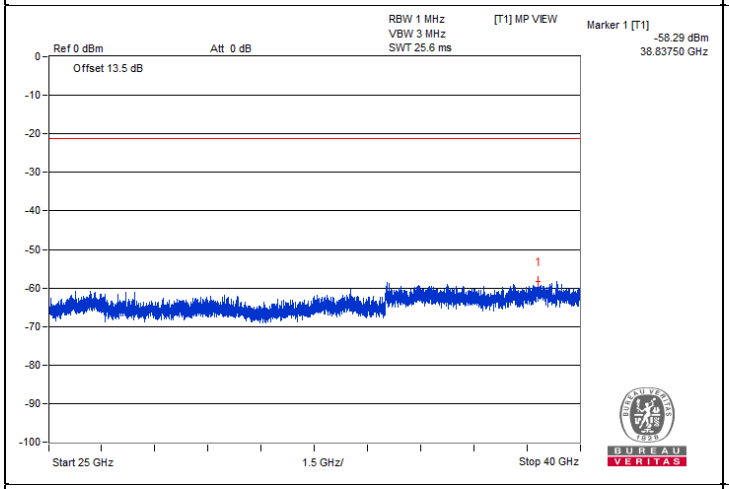
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.29 dBm
38.83750 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

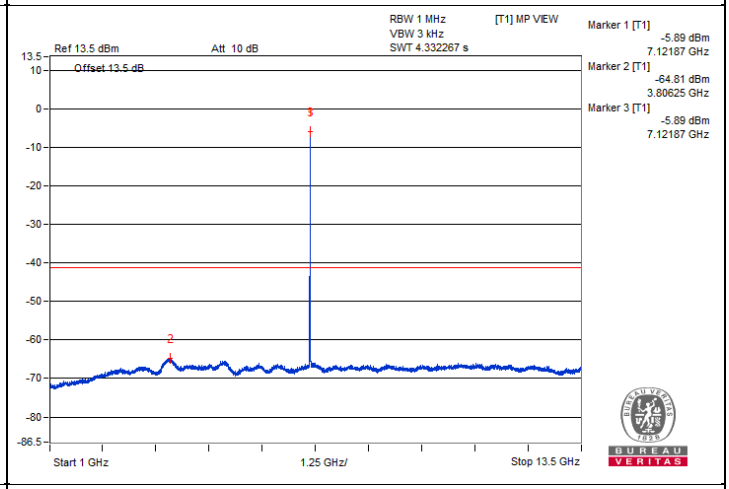
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-5.89 dBm
7.12187 GHz
Marker 2 [T1]
-64.81 dBm
3.80625 GHz
Marker 3 [T1]
-5.89 dBm
7.12187 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

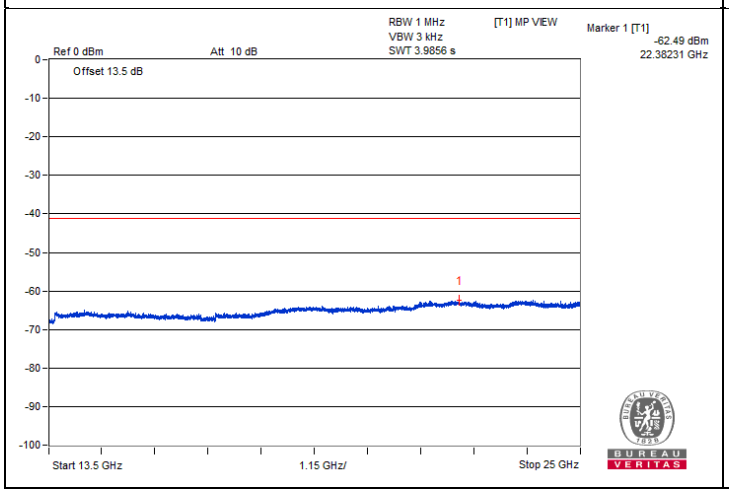
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.49 dBm
22.38231 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

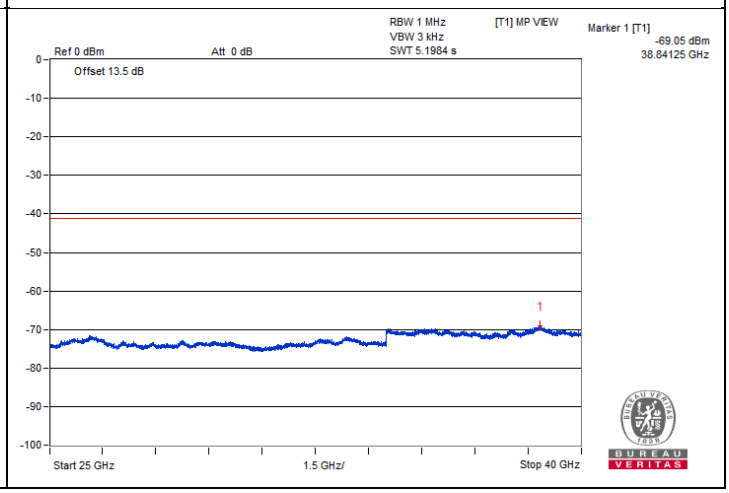
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.05 dBm
38.84125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	62.99 PK	88.2	-25.21	-36.36	4.09	-32.27
2	#7125	48.54 AV	68.2	-19.66	-50.81	4.09	-46.72

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

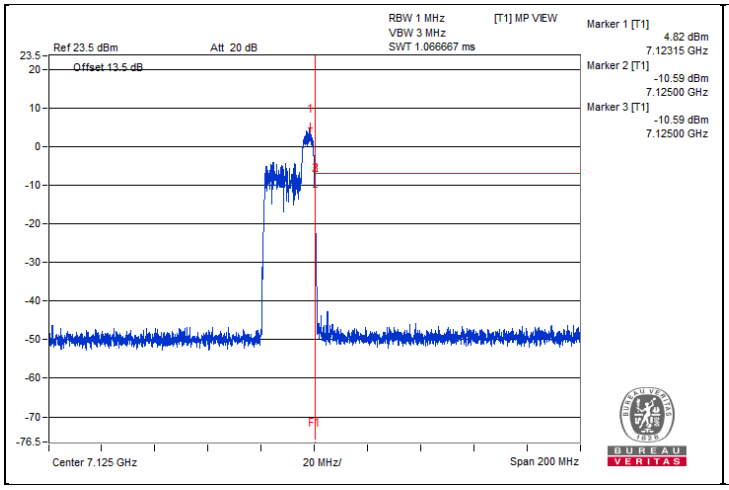

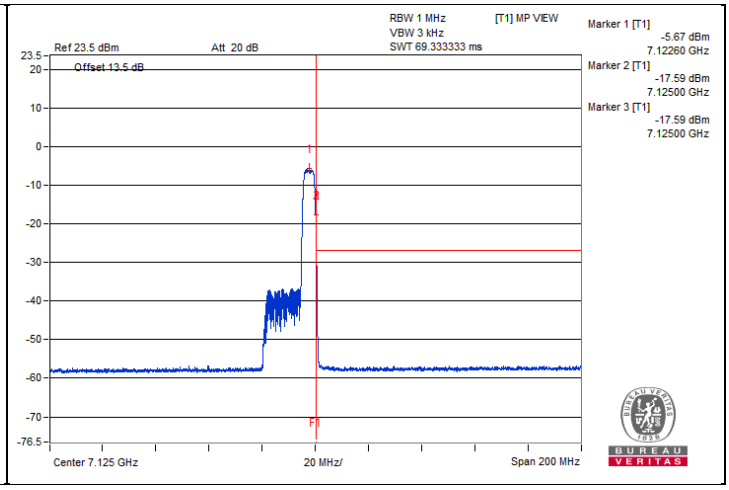

20 MHz Preamble 802.11ax (RU106) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11904.68	43.97 PK	74	-30.03	-56.05	4.76	-51.29
2	11903.12	33.18 AV	54	-20.82	-66.84	4.76	-62.08
3	17872.87	43.69 PK	74	-30.31	-56.33	4.76	-51.57
4	17868.56	33.78 AV	54	-20.22	-66.24	4.76	-61.48

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

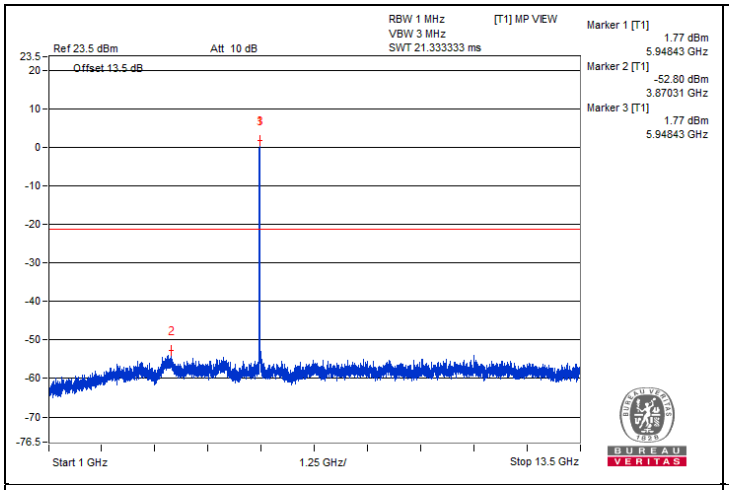
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.77 dBm
5.94843 GHz
Marker 2 [T1]
-52.80 dBm
3.87031 GHz
Marker 3 [T1]
1.77 dBm
5.94843 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

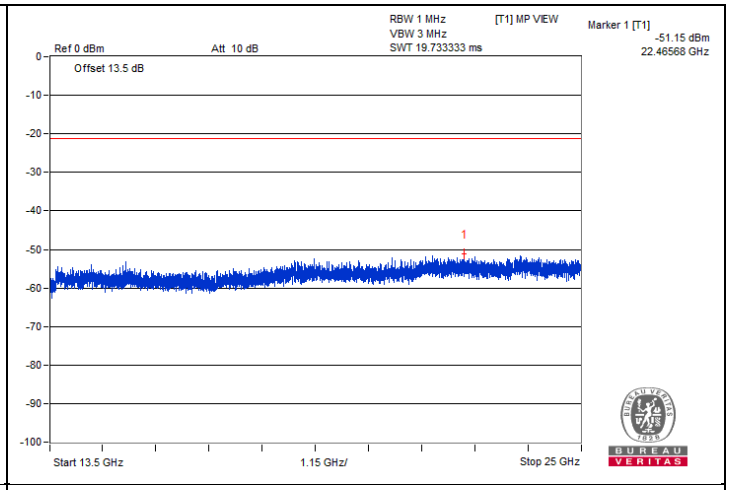
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.15 dBm
22.46568 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

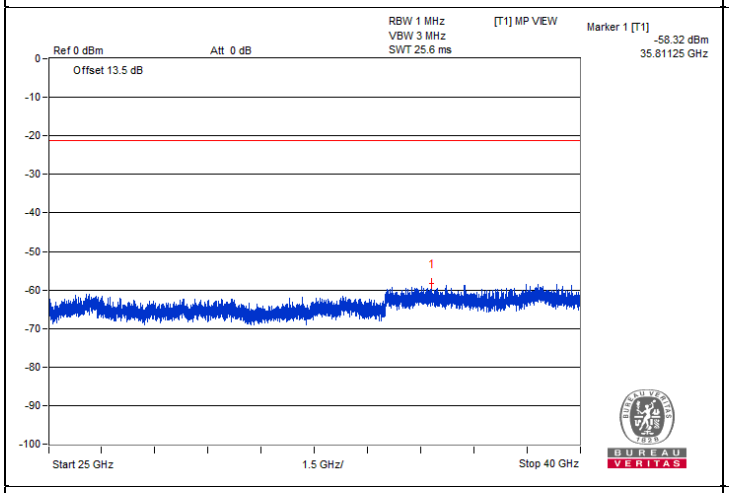
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.32 dBm
35.81125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

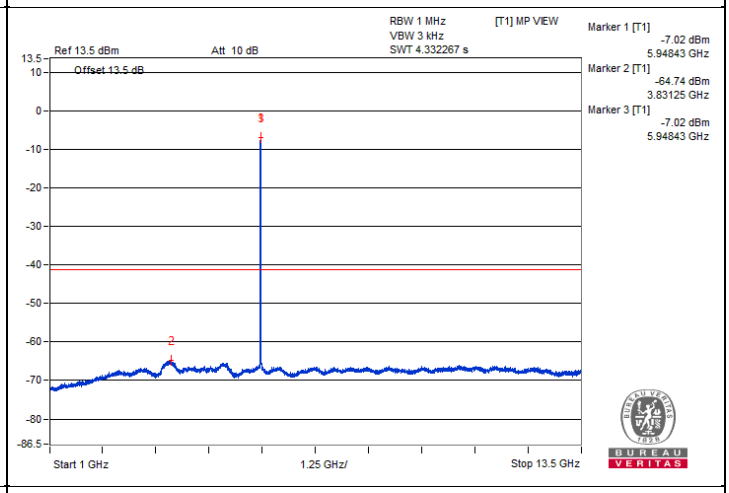
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.02 dBm
5.94843 GHz
Marker 2 [T1]
-64.74 dBm
3.83125 GHz
Marker 3 [T1]
-7.02 dBm
5.94843 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

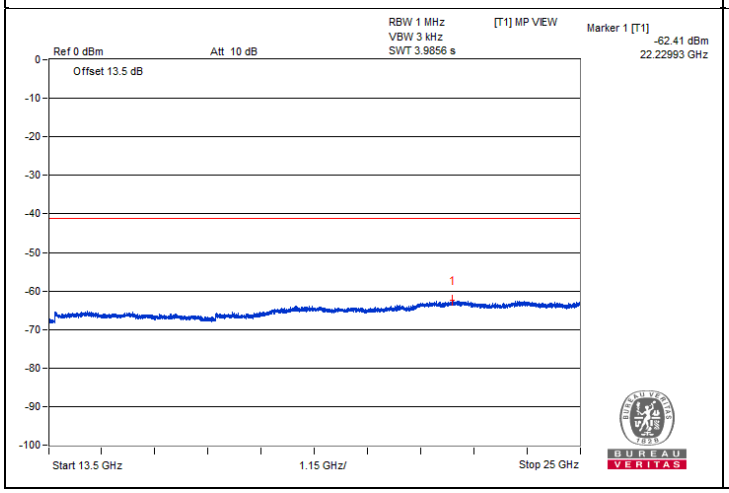
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.41 dBm
22.22993 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

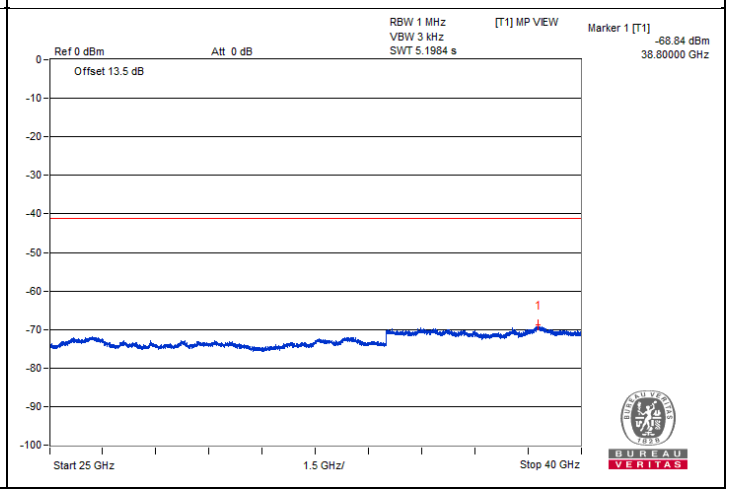
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.84 dBm
38.80000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5924.65	54.85 PK	88.2	-33.35	-45.17	4.76	-40.41
2	#5885.9	43.43 AV	68.2	-24.77	-56.59	4.76	-51.83

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

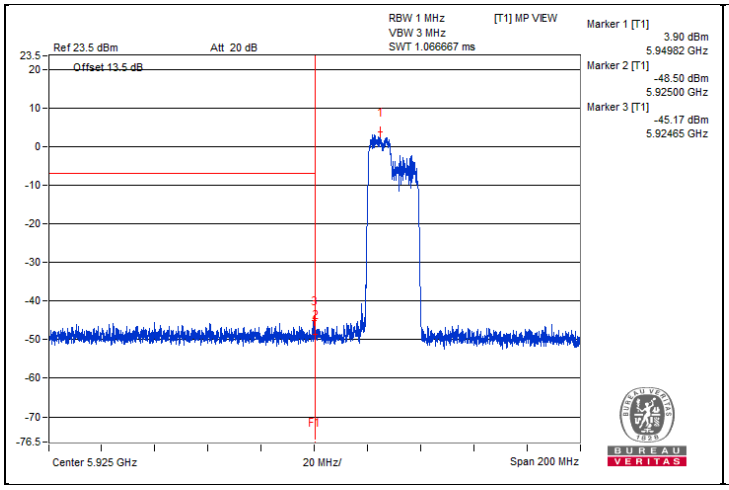

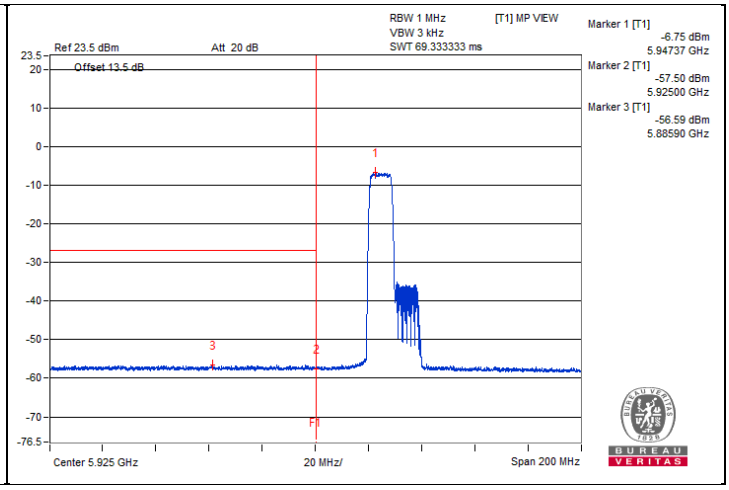

20 MHz Preamble 802.11ax (RU106) - Channel 45

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12350	43.27 PK	74	-30.73	-56.75	4.76	-51.99
2	12346.87	33.66 AV	54	-20.34	-66.36	4.76	-61.60
3	18534.12	44.27 PK	74	-29.73	-55.75	4.76	-50.99
4	18518.31	34.97 AV	54	-19.03	-65.05	4.76	-60.29

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

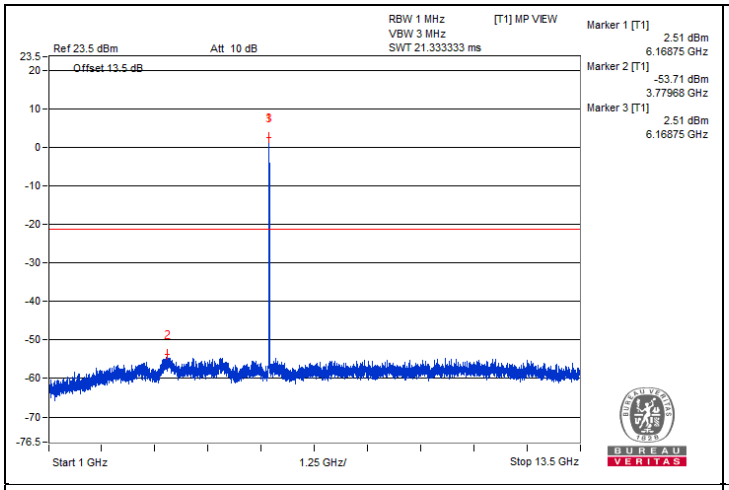
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
2.51 dBm
6.16875 GHz
Marker 2 [T1]
-53.71 dBm
3.77968 GHz
Marker 3 [T1]
2.51 dBm
6.16875 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

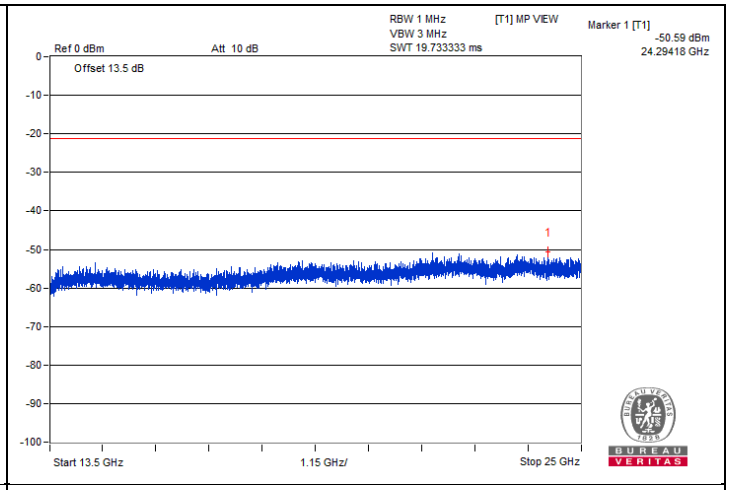
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.59 dBm
24.29418 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

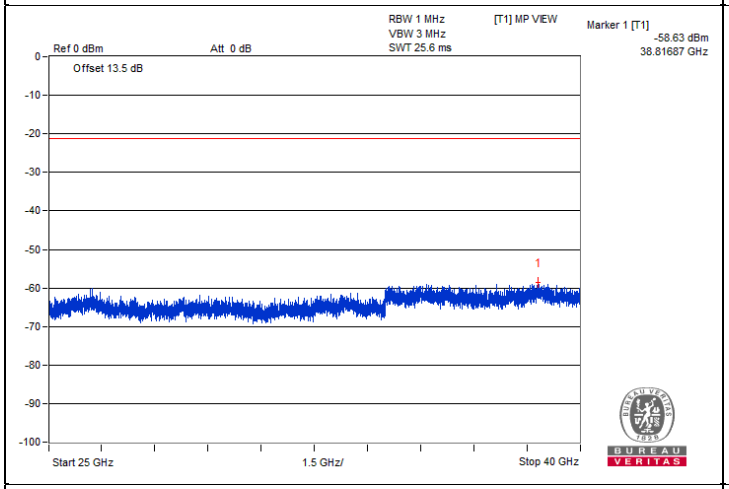
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.63 dBm
38.81687 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

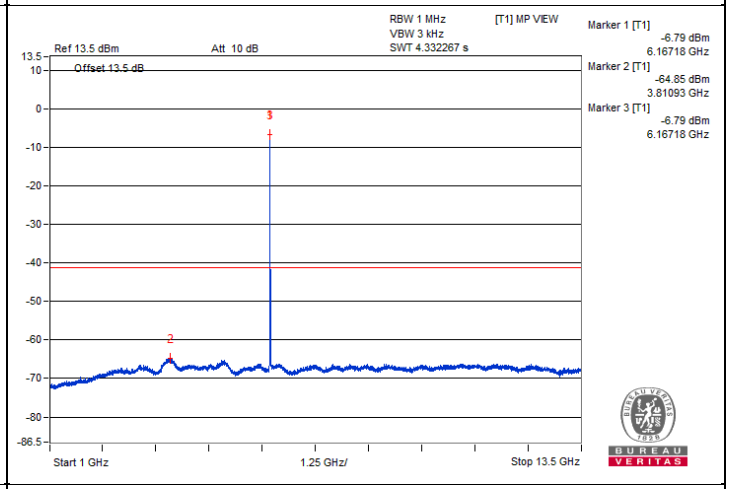
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.79 dBm
6.16718 GHz
Marker 2 [T1]
-64.85 dBm
3.81093 GHz
Marker 3 [T1]
-6.79 dBm
6.16718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

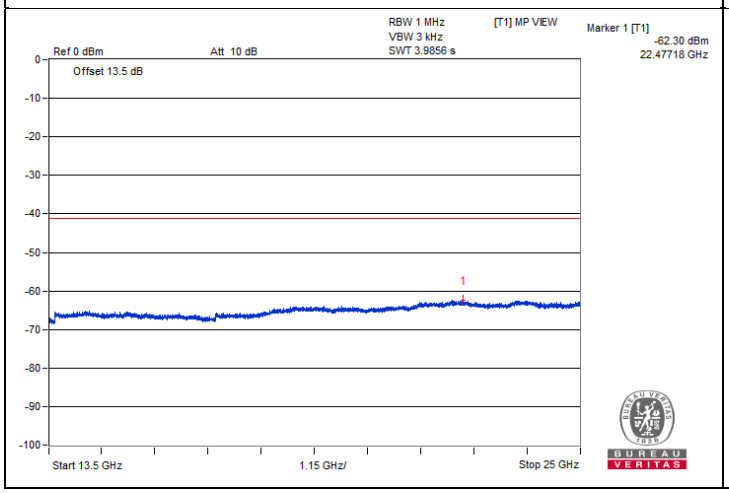
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.30 dBm
22.47718 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

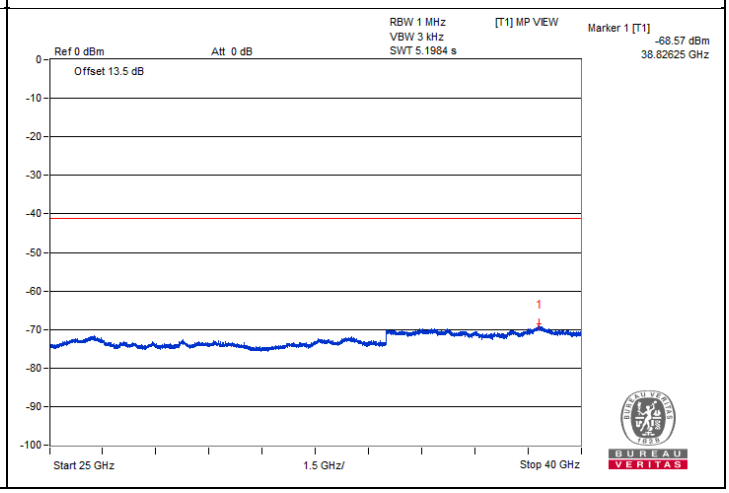
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.57 dBm
38.82625 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12832.81	43.76 PK	88.2	-44.44	-56.26	4.76	-51.50
2	#12820.31	32.24 AV	68.2	-35.96	-67.78	4.76	-63.02
3	19242.81	46.56 PK	74	-27.44	-53.46	4.76	-48.70
4	19247.12	35.85 AV	54	-18.15	-64.17	4.76	-59.41

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

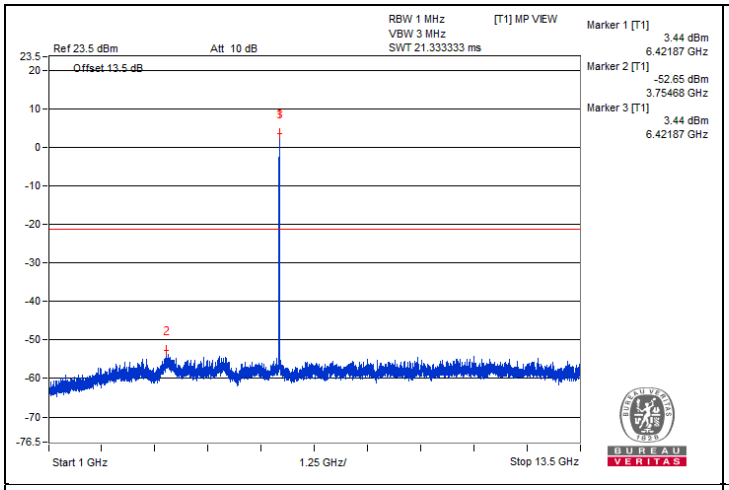
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.44 dBm
6.42187 GHz
Marker 2 [T1]
-52.65 dBm
3.75468 GHz
Marker 3 [T1]
3.44 dBm
6.42187 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

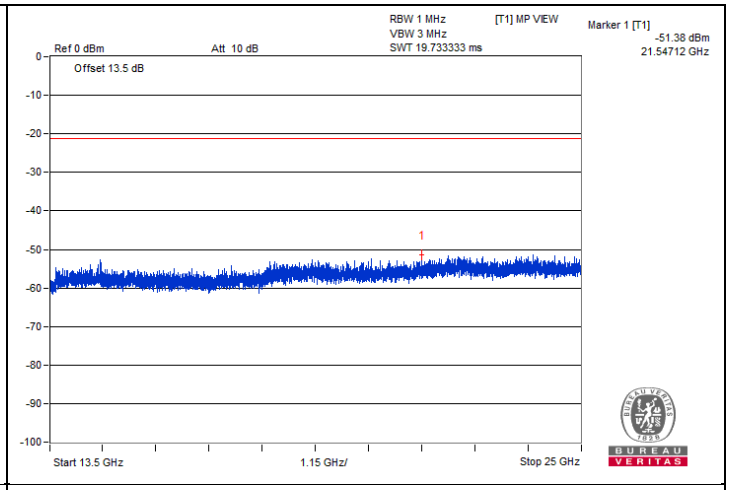
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.38 dBm
21.54712 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

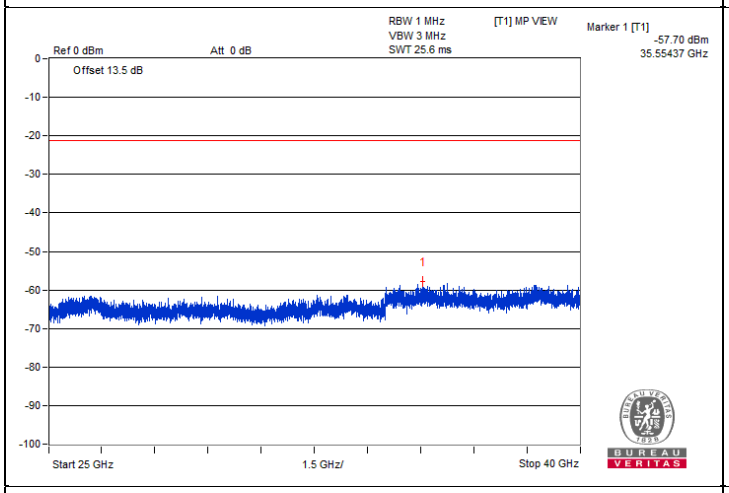
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.70 dBm
35.55437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

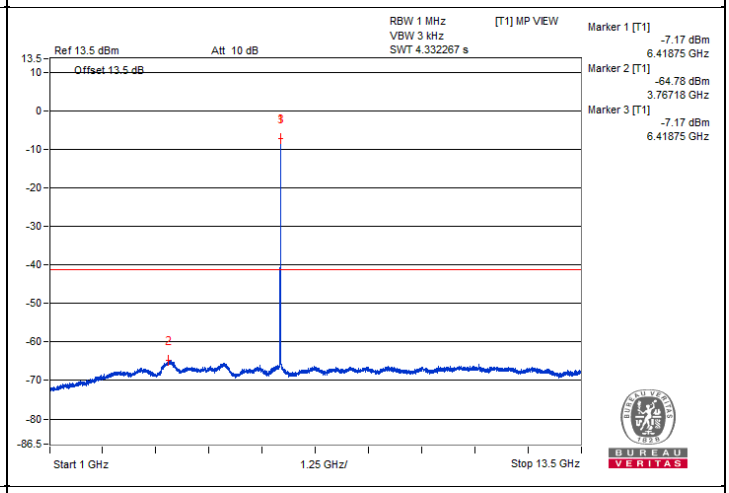
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.17 dBm
6.41875 GHz
Marker 2 [T1]
-64.78 dBm
3.76718 GHz
Marker 3 [T1]
-7.17 dBm
6.41875 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

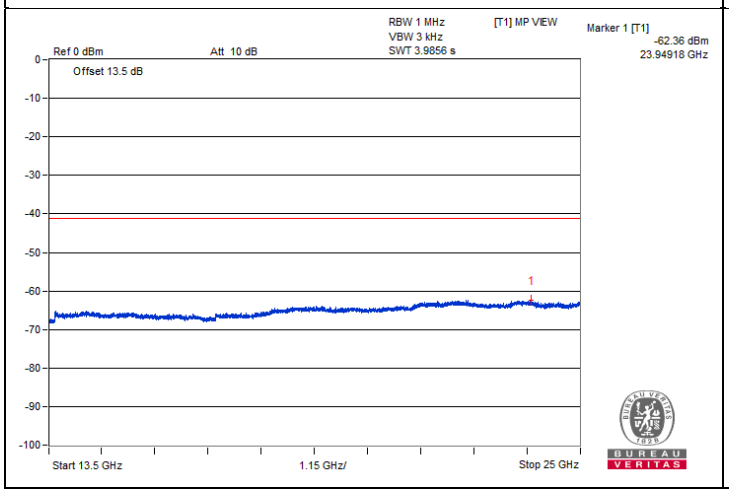
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.36 dBm
23.94918 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

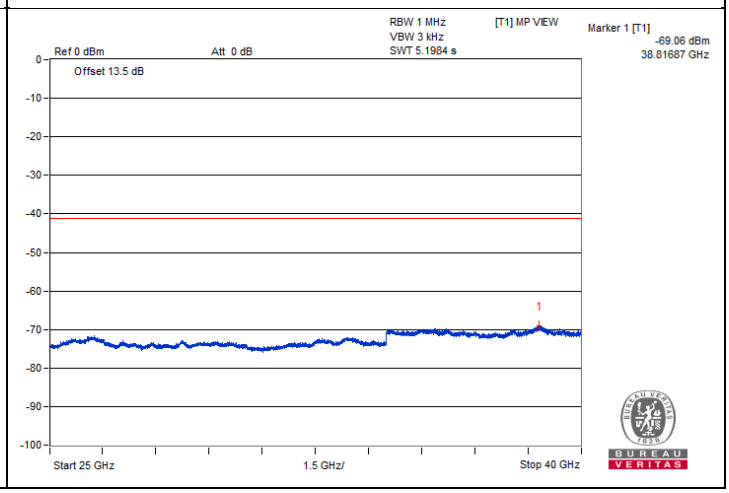
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.06 dBm
38.81687 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12873.43	43.63 PK	88.2	-44.57	-56.39	4.76	-51.63
2	#12860.93	32.41 AV	68.2	-35.79	-67.61	4.76	-62.85
3	19314.68	47.29 PK	74	-26.71	-52.73	4.76	-47.97
4	19313.25	35.8 AV	54	-18.2	-64.22	4.76	-59.46

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

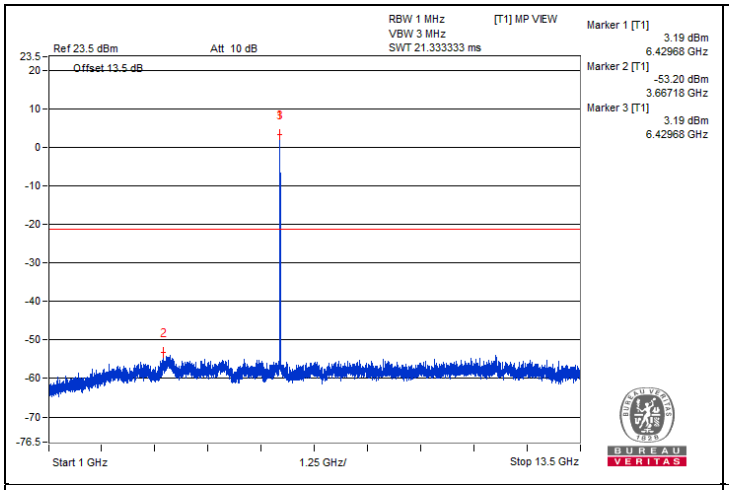
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.19 dBm
6.42968 GHz
Marker 2 [T1]
-53.20 dBm
3.66718 GHz
Marker 3 [T1]
3.19 dBm
6.42968 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

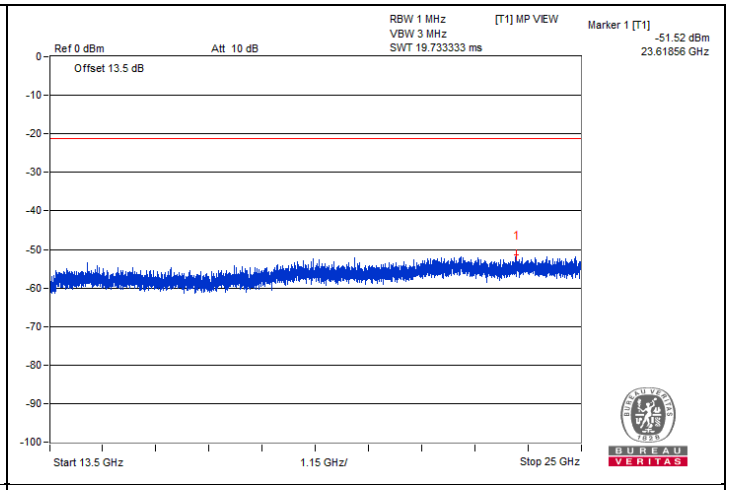
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.52 dBm
23.61856 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

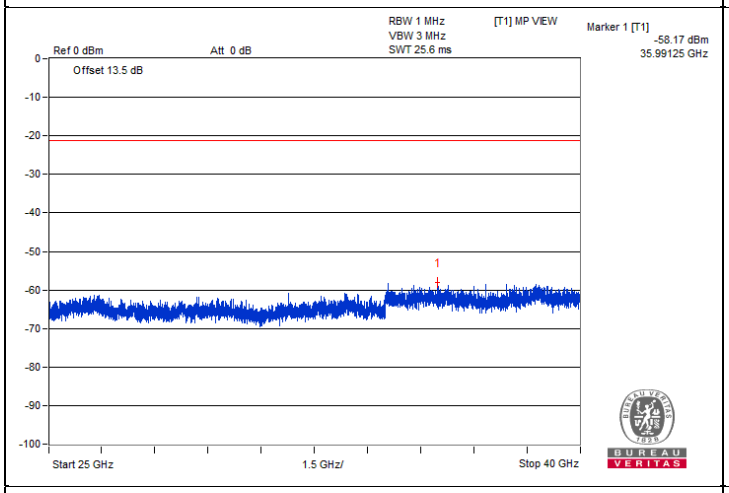
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.17 dBm
35.99125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

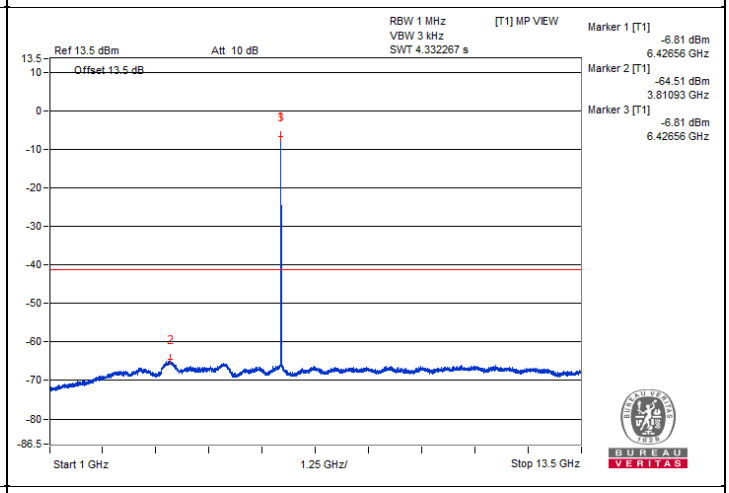
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.81 dBm
6.42656 GHz
Marker 2 [T1]
-64.51 dBm
3.81093 GHz
Marker 3 [T1]
-6.81 dBm
6.42656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

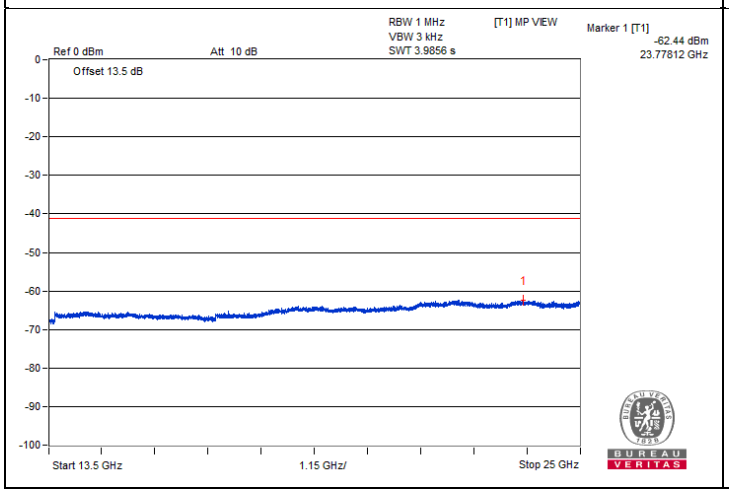
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.44 dBm
23.77812 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

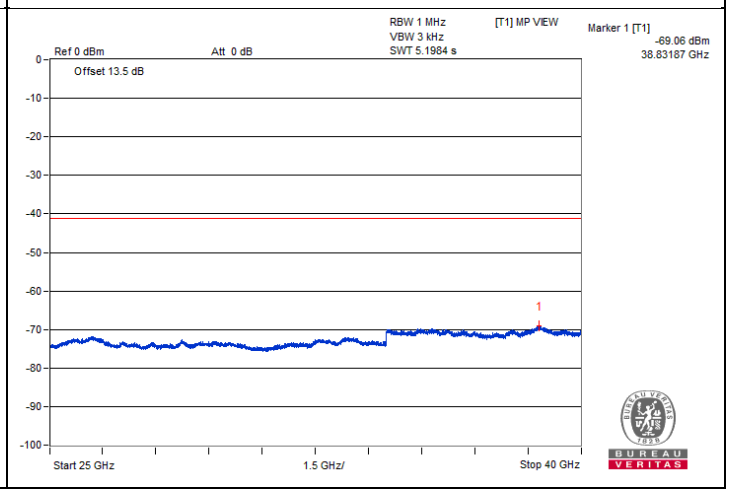
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.06 dBm
38.83187 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 105

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12951.56	43.04 PK	88.2	-45.16	-56.98	4.76	-52.22
2	#12946.87	31.96 AV	68.2	-36.24	-68.06	4.76	-63.30
3	19421.06	44.49 PK	74	-29.51	-55.53	4.76	-50.77
4	19428.25	35.35 AV	54	-18.65	-64.67	4.76	-59.91

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

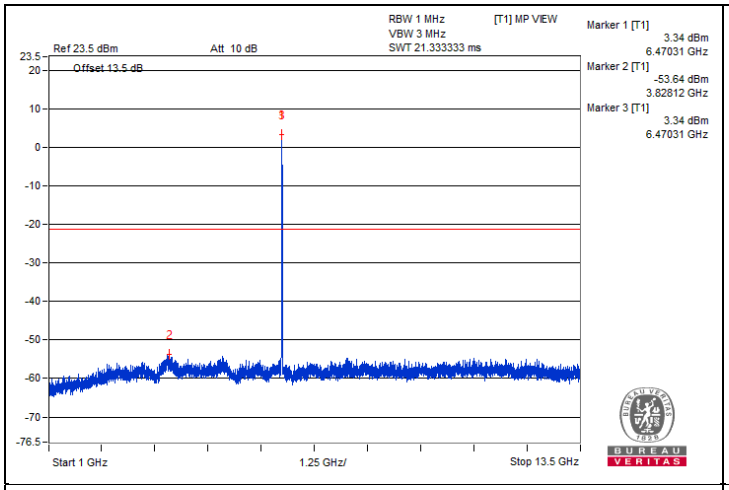
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.34 dBm
6.47031 GHz
Marker 2 [T1]
-53.64 dBm
3.82812 GHz
Marker 3 [T1]
3.34 dBm
6.47031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

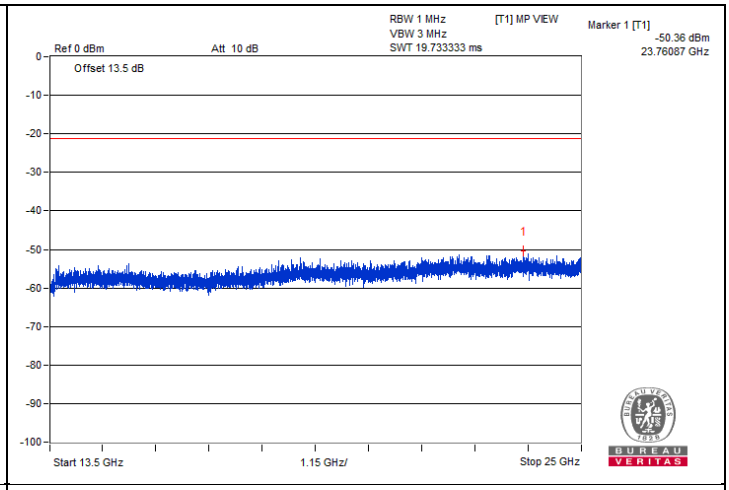
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.36 dBm
23.76087 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

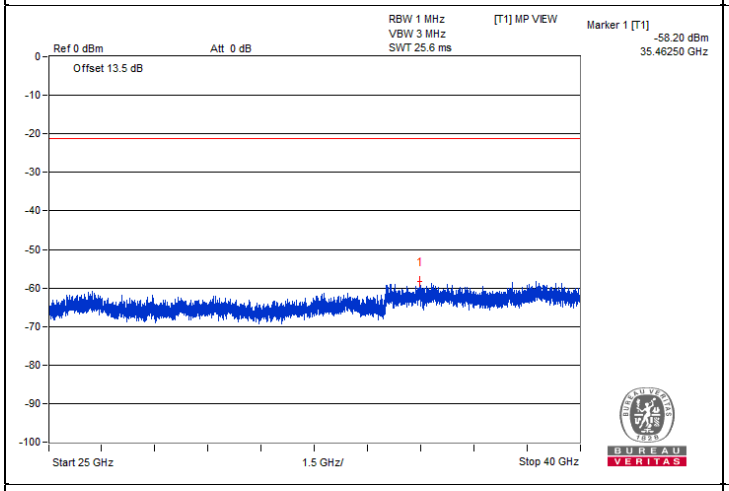
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.20 dBm
35.46250 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

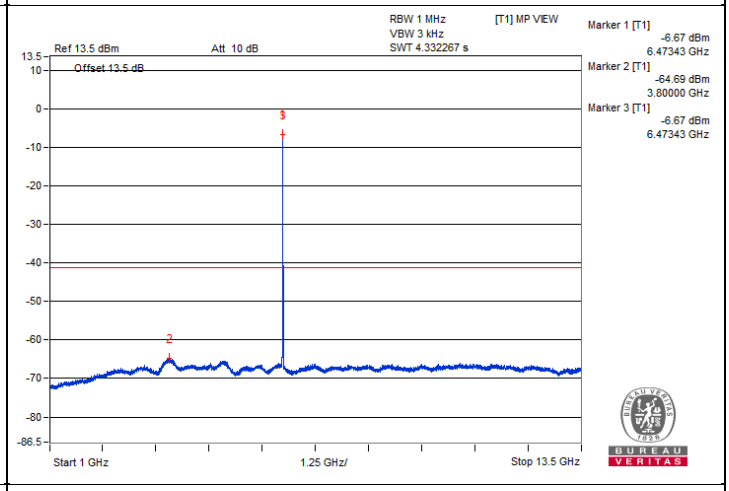
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.67 dBm
6.47343 GHz
Marker 2 [T1]
-64.69 dBm
3.80000 GHz
Marker 3 [T1]
-6.67 dBm
6.47343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

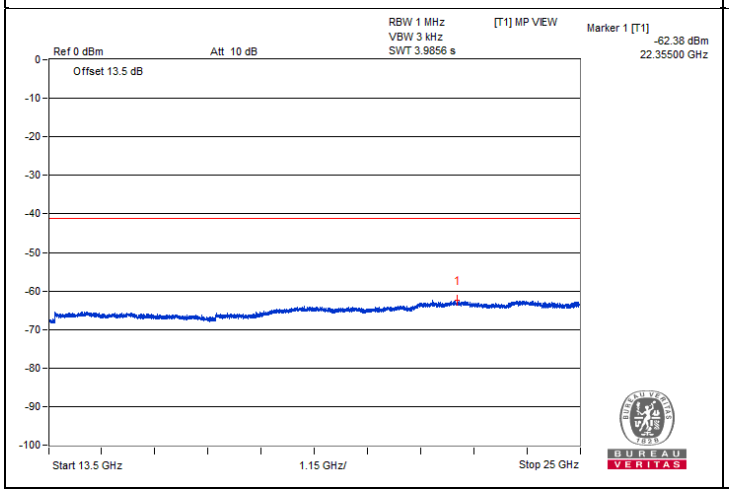
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.38 dBm
22.35500 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

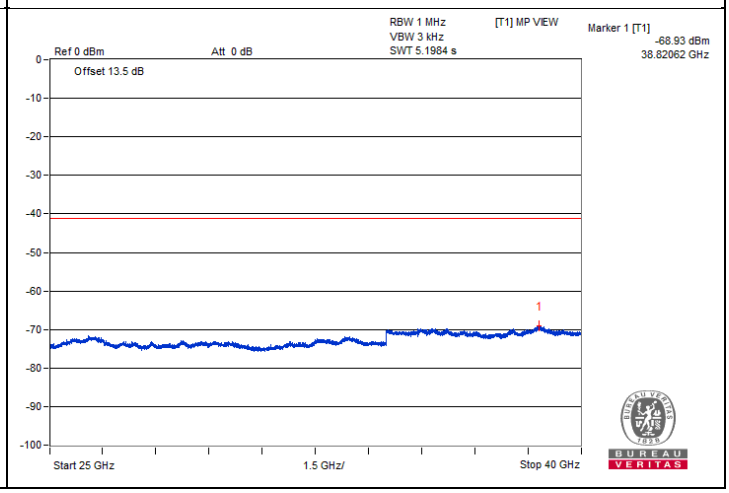
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.93 dBm
38.82062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 113

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13031.25	41.93 PK	88.2	-46.27	-58.09	4.76	-53.33
2	#13039.06	31.89 AV	68.2	-36.31	-68.13	4.76	-63.37
3	19547.56	44.28 PK	74	-29.72	-55.74	4.76	-50.98
4	19537.5	35.46 AV	54	-18.54	-64.56	4.76	-59.80

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

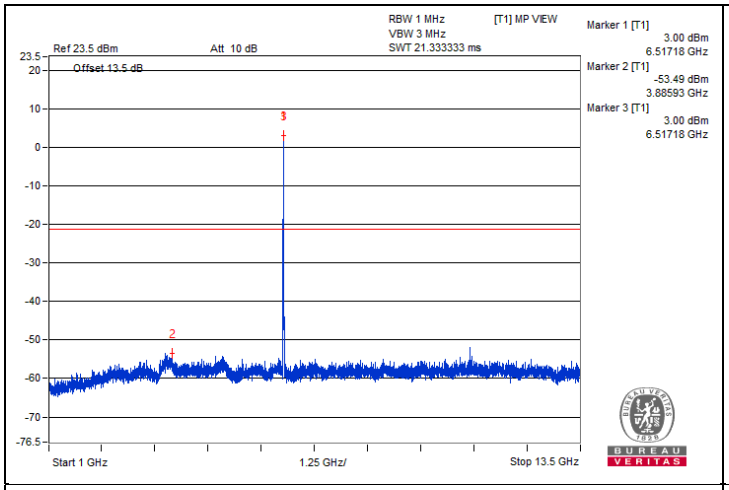
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.00 dBm
6.51718 GHz
Marker 2 [T1]
-53.49 dBm
3.88593 GHz
Marker 3 [T1]
3.00 dBm
6.51718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

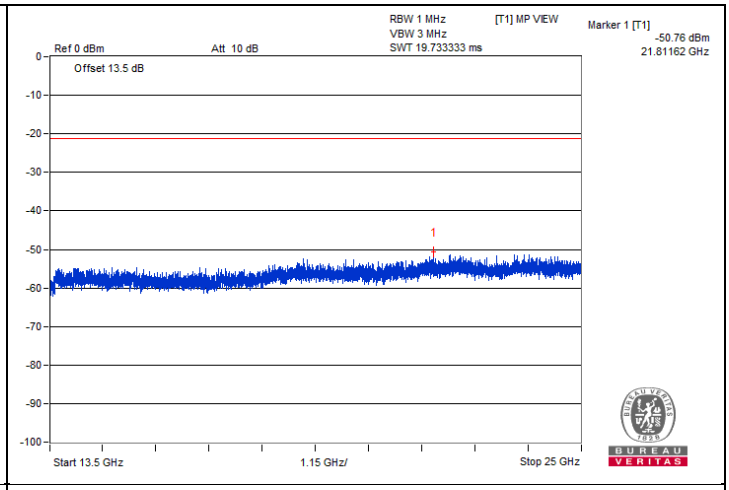
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.76 dBm
21.81162 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

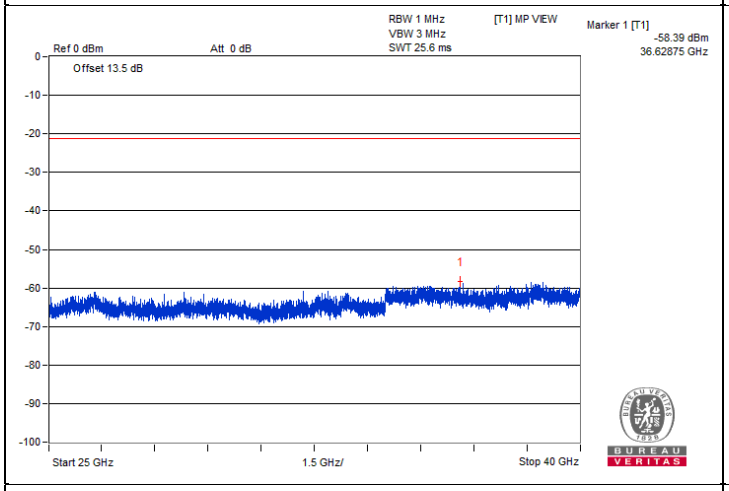
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.39 dBm
36.62875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

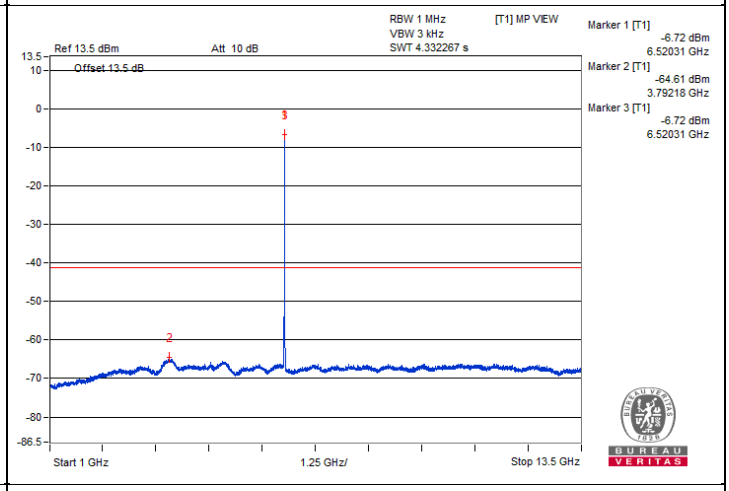
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.72 dBm
6.52031 GHz
Marker 2 [T1]
-64.61 dBm
3.79218 GHz
Marker 3 [T1]
-6.72 dBm
6.52031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

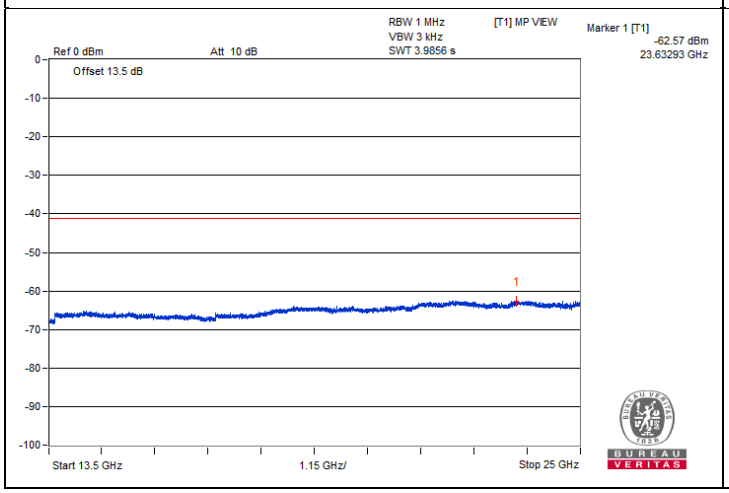
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.57 dBm
23.63293 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

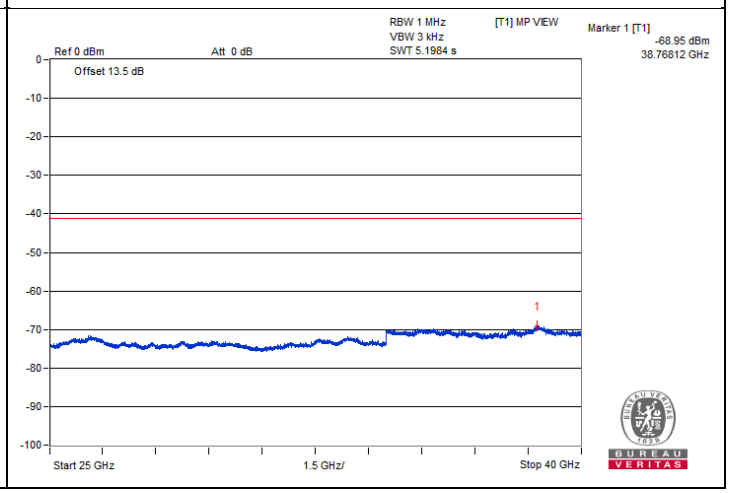
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.95 dBm
38.76812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13076.56	42.53 PK	88.2	-45.67	-57.49	4.76	-52.73
2	#13068.75	32.09 AV	68.2	-36.11	-67.93	4.76	-63.17
3	19599.31	44.75 PK	74	-29.25	-55.27	4.76	-50.51
4	19597.87	35.34 AV	54	-18.66	-64.68	4.76	-59.92

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

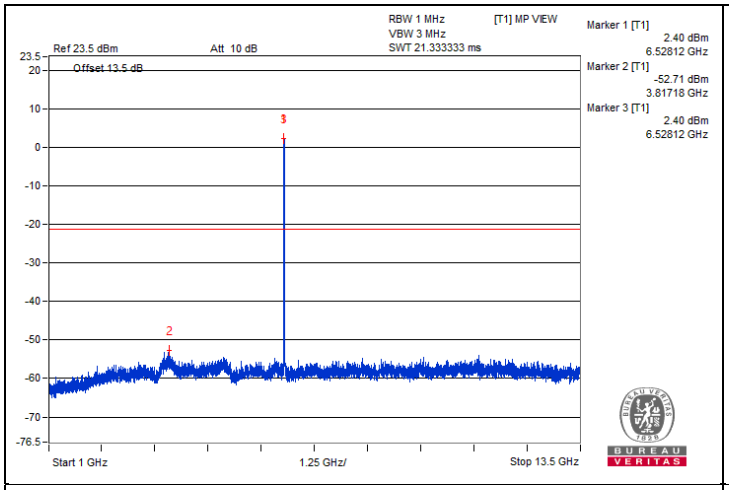
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
2.40 dBm
6.52812 GHz
Marker 2 [T1]
-52.71 dBm
3.81718 GHz
Marker 3 [T1]
2.40 dBm
6.52812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

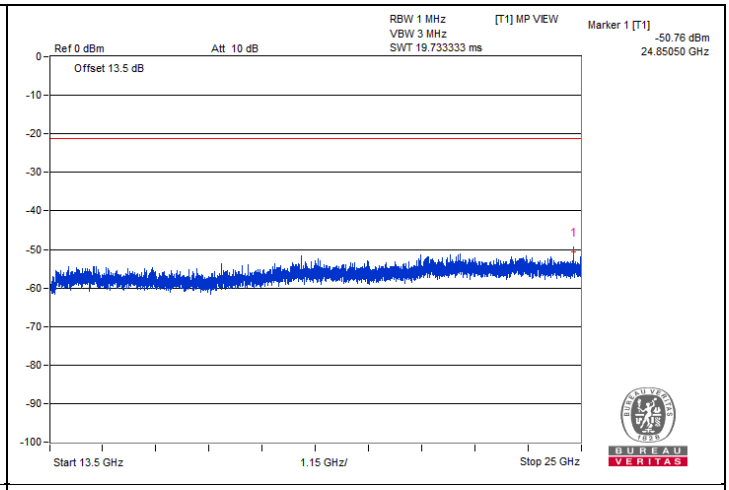
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.76 dBm
24.85050 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

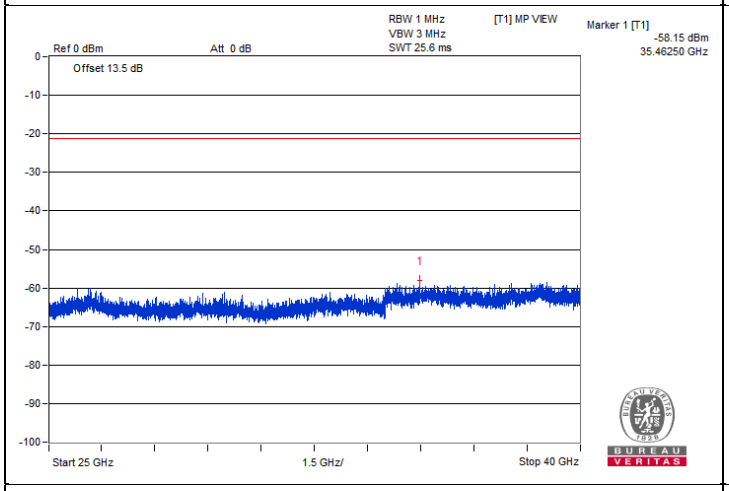
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.15 dBm
35.46250 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

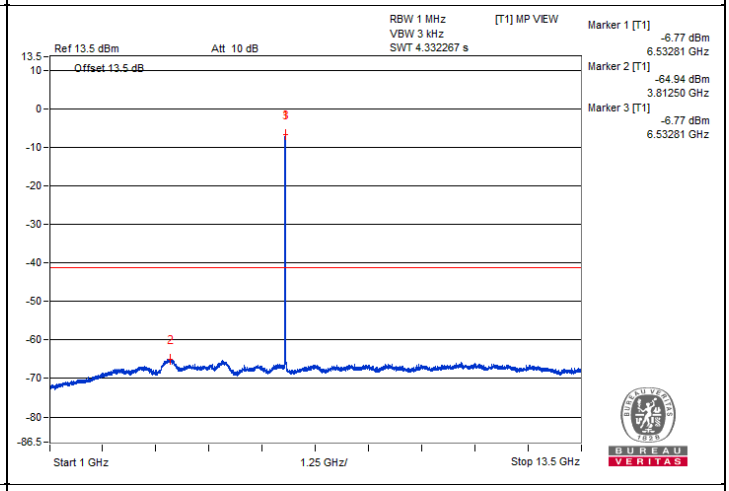
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.77 dBm
6.53281 GHz
Marker 2 [T1]
-64.94 dBm
3.81250 GHz
Marker 3 [T1]
-6.77 dBm
6.53281 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

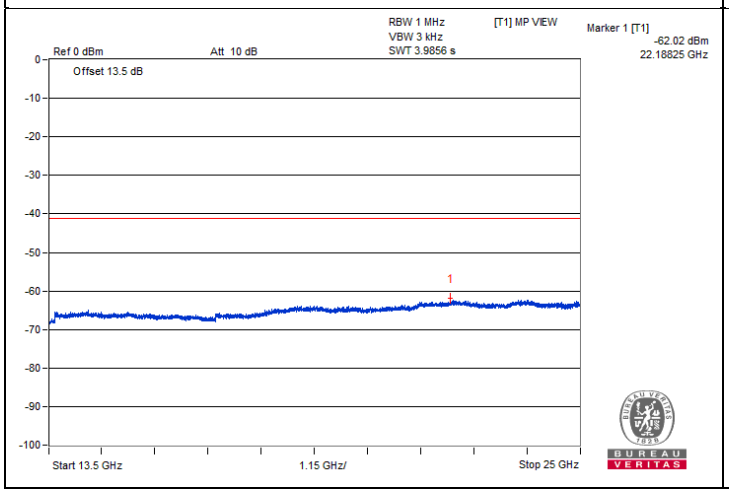
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.02 dBm
22.18825 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

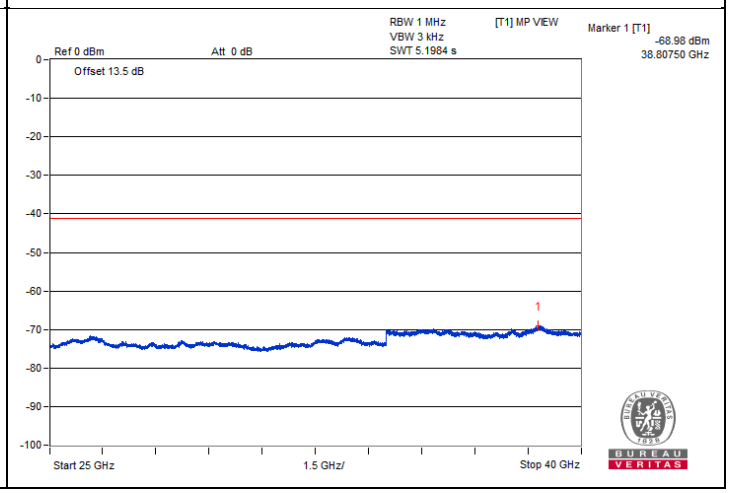
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.98 dBm
38.80750 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13389.06	42.23 PK	74	-31.77	-57.79	4.76	-53.03
2	13382.81	32.31 AV	54	-21.69	-67.71	4.76	-62.95
3	20088.06	45.3 PK	74	-28.7	-54.72	4.76	-49.96
4	20085.18	35.66 AV	54	-18.34	-64.36	4.76	-59.60

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

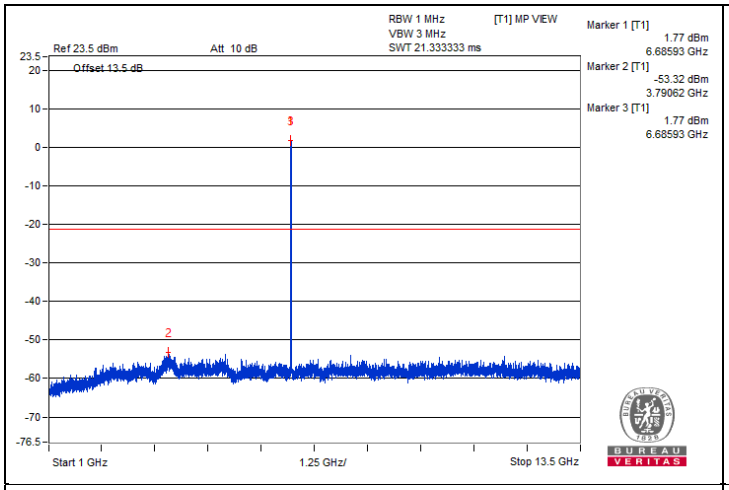
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.77 dBm
6.68593 GHz
Marker 2 [T1]
-53.32 dBm
3.79062 GHz
Marker 3 [T1]
1.77 dBm
6.68593 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

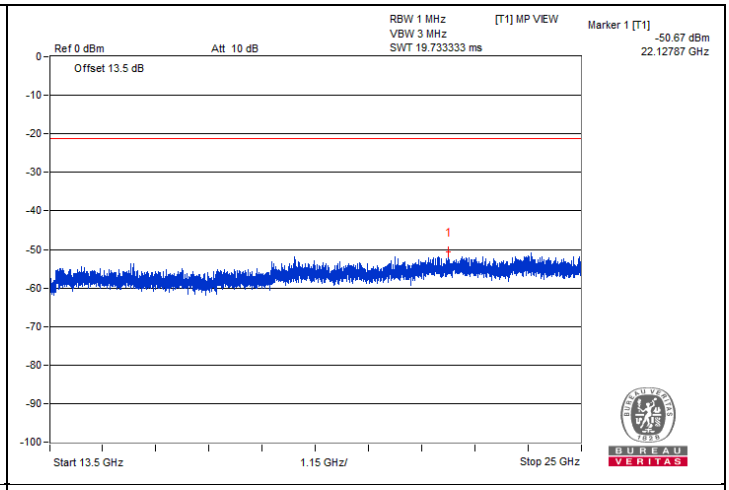
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.67 dBm
22.12787 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

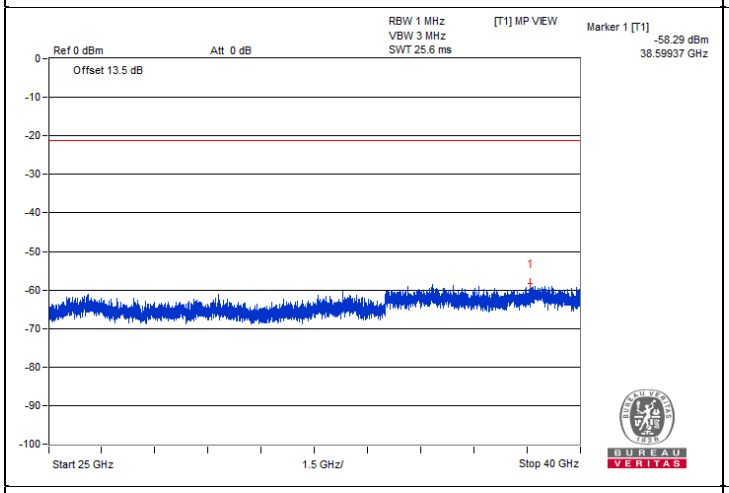
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.29 dBm
38.59937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

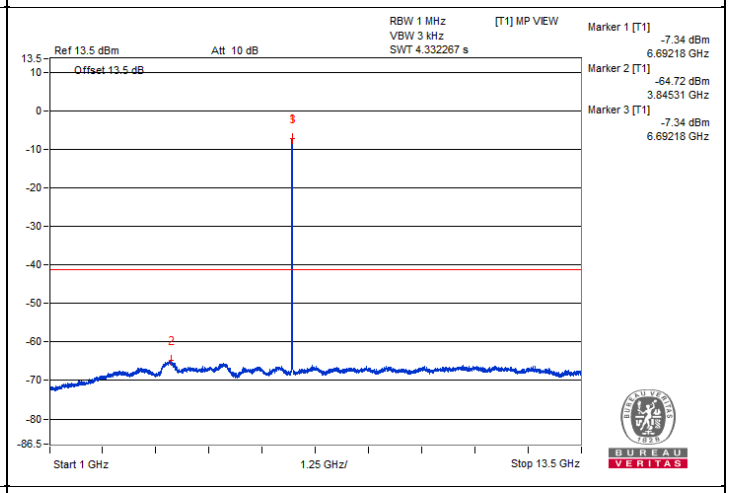
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.34 dBm
6.69218 GHz
Marker 2 [T1]
-64.72 dBm
3.84531 GHz
Marker 3 [T1]
-7.34 dBm
6.69218 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

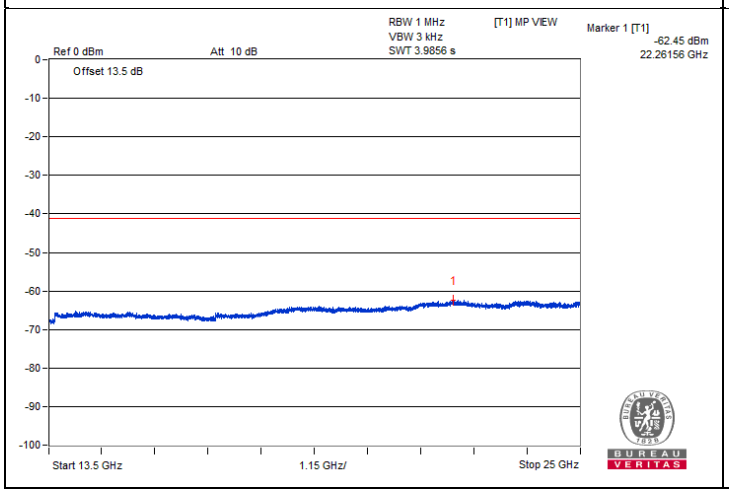
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.45 dBm
22.26156 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

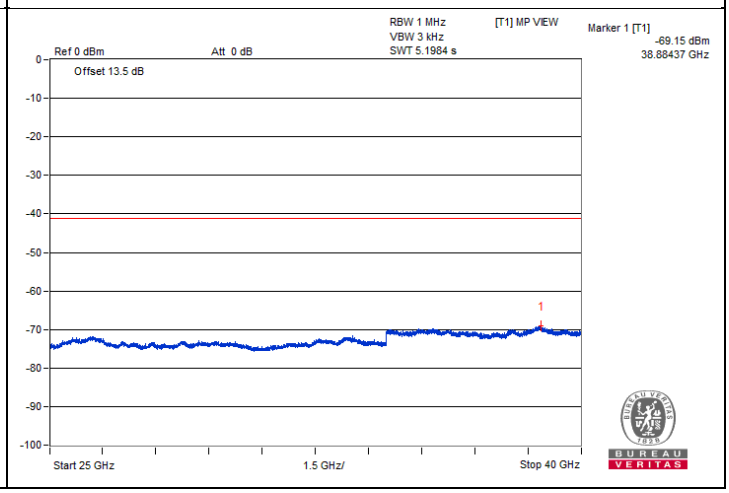
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.15 dBm
38.88437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13702.68	43.01 PK	88.2	-45.19	-57.01	4.76	-52.25
2	#13718.5	34.29 AV	68.2	-33.91	-65.73	4.76	-60.97
3	20559.56	45.84 PK	74	-28.16	-54.18	4.76	-49.42
4	20562.43	35.36 AV	54	-18.64	-64.66	4.76	-59.90

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

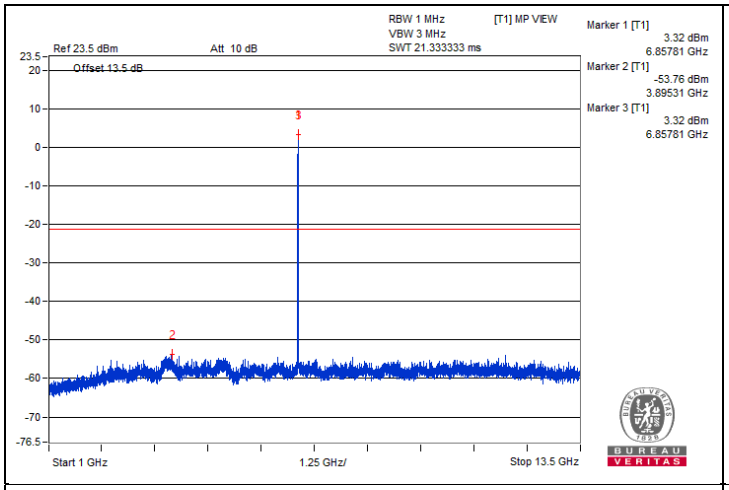
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.32 dBm
6.85781 GHz
Marker 2 [T1]
-53.76 dBm
3.89531 GHz
Marker 3 [T1]
3.32 dBm
6.85781 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

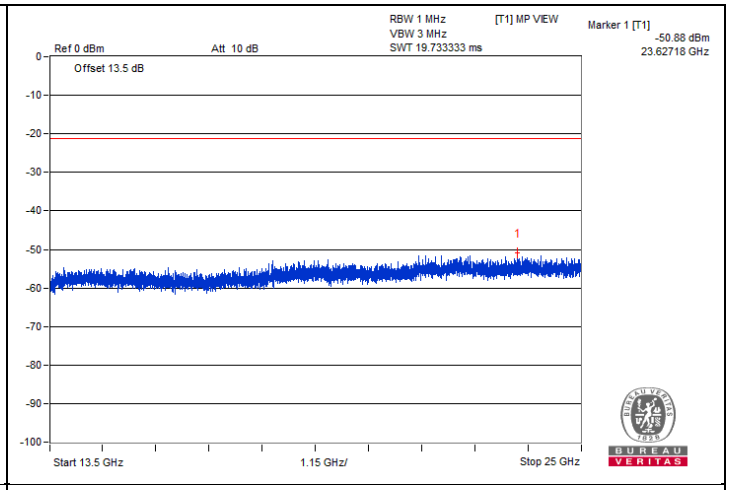
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.88 dBm
23.62718 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

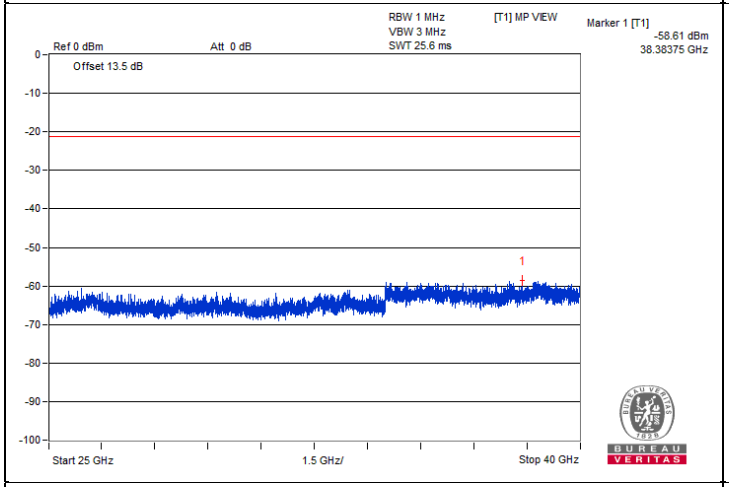
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.61 dBm
38.38375 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

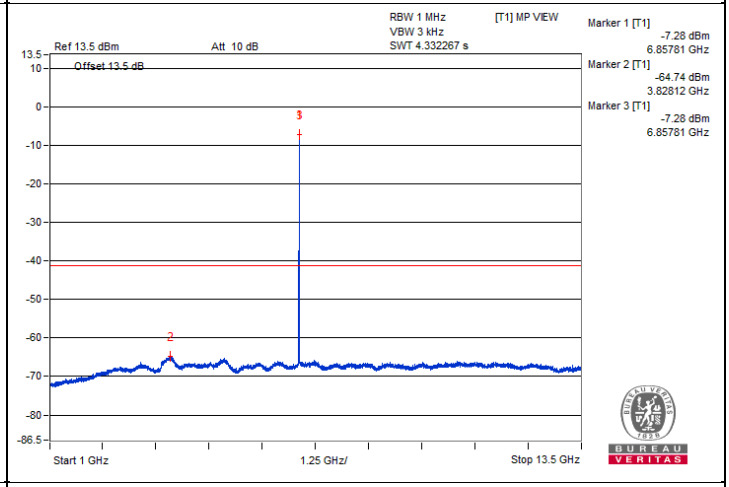
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-7.28 dBm
6.85781 GHz
Marker 2 [T1]
-64.74 dBm
3.82812 GHz
Marker 3 [T1]
-7.28 dBm
6.85781 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

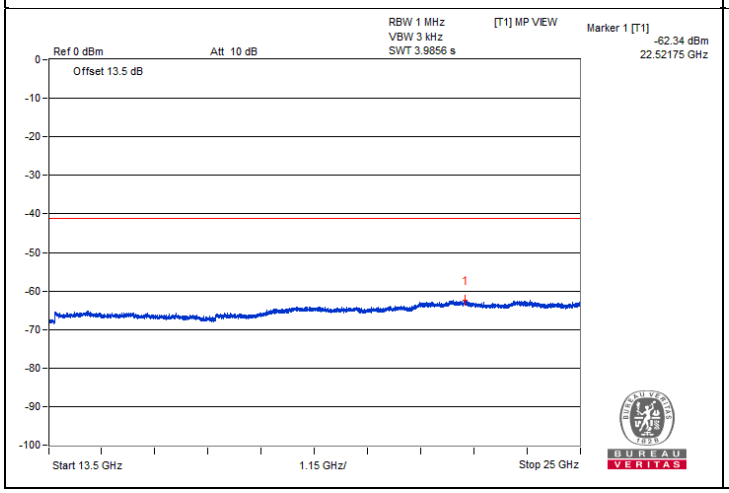
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.34 dBm
22.52175 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

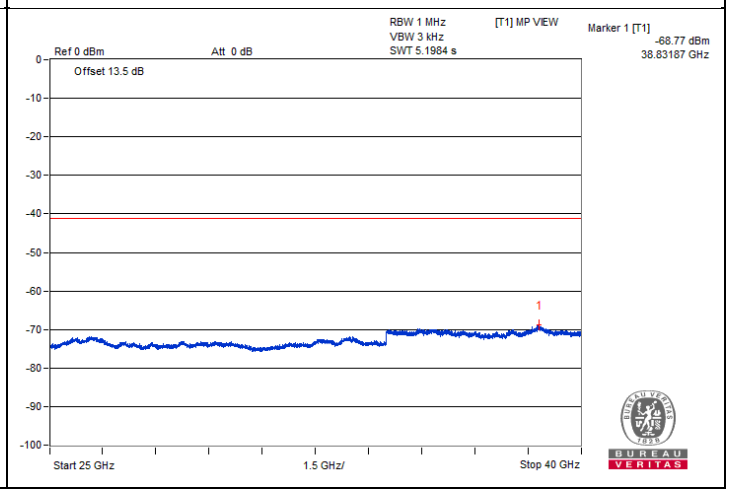
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.77 dBm
38.83187 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 185

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13744.37	43.95 PK	88.2	-44.25	-56.07	4.76	-51.31
2	#13757.31	34.03 AV	68.2	-34.17	-65.99	4.76	-61.23
3	20617.06	45.36 PK	74	-28.64	-54.66	4.76	-49.90
4	20624.25	35.22 AV	54	-18.78	-64.8	4.76	-60.04

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

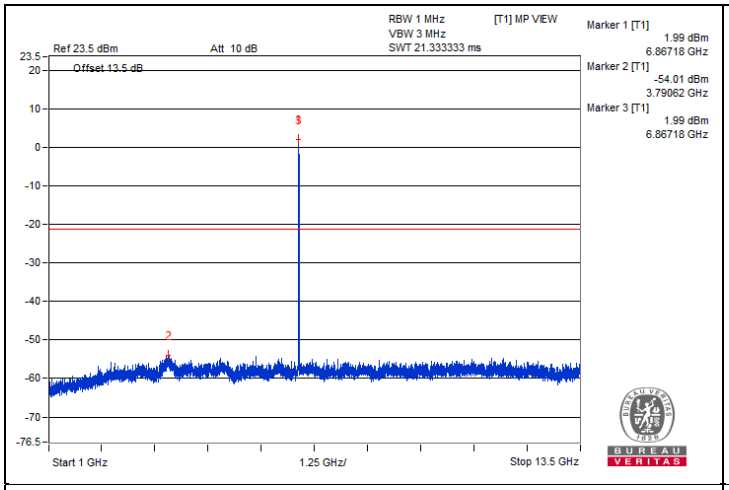
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
1.99 dBm
6.86718 GHz
Marker 2 [T1]
-54.01 dBm
3.79062 GHz
Marker 3 [T1]
1.99 dBm
6.86718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

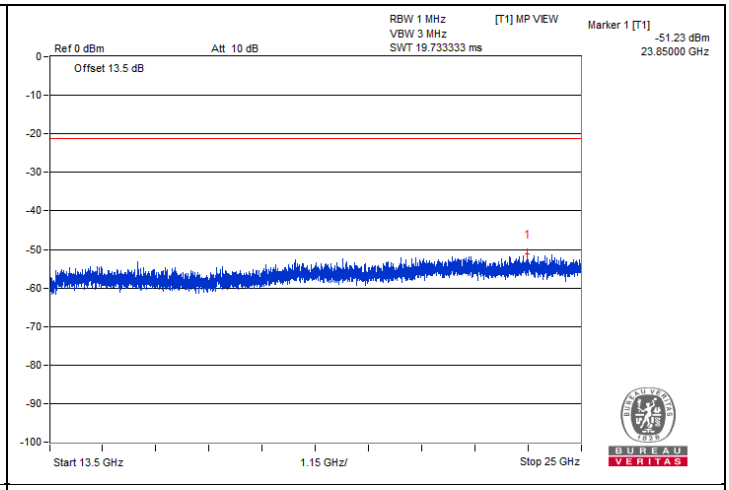
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.23 dBm
23.85000 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

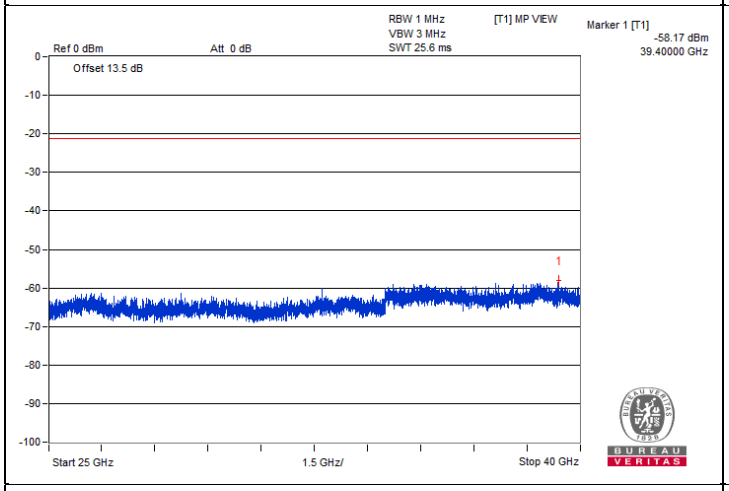
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.17 dBm
39.40000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

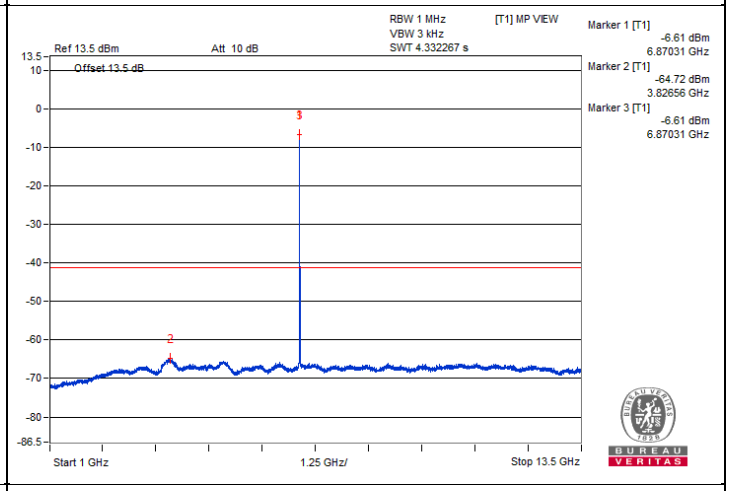
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.61 dBm
6.87031 GHz
Marker 2 [T1]
-64.72 dBm
3.82656 GHz
Marker 3 [T1]
-6.61 dBm
6.87031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

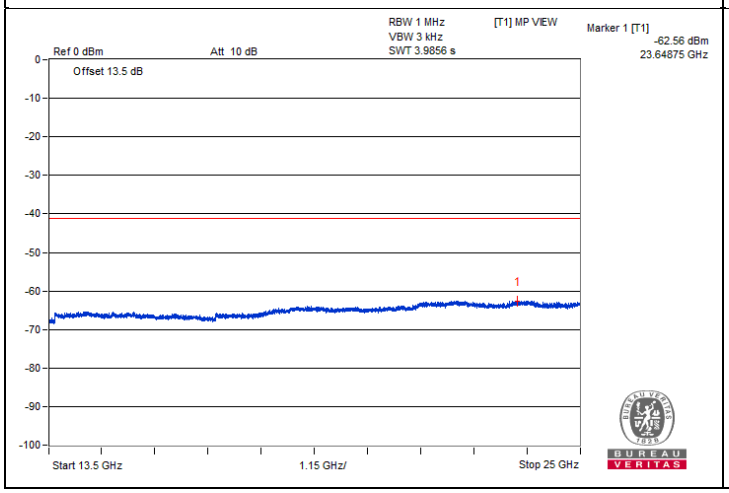
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.56 dBm
23.64875 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

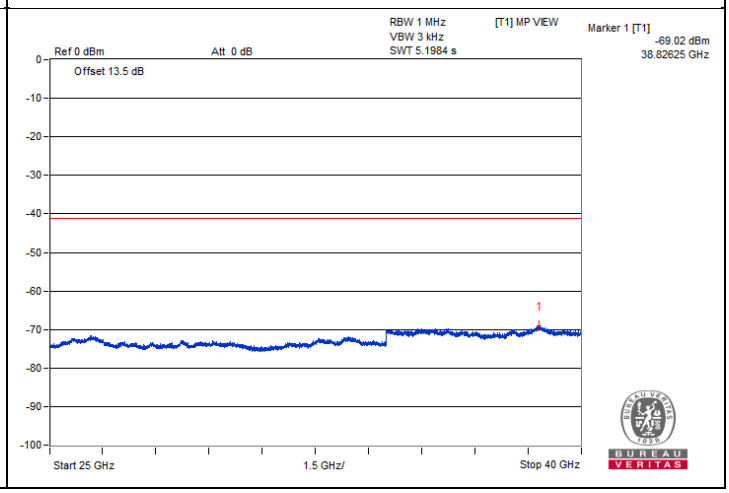
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.02 dBm
38.82625 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 209

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13995.93	44.29 PK	88.2	-43.91	-55.73	4.76	-50.97
2	#13984.43	33.91 AV	68.2	-34.29	-66.11	4.76	-61.35
3	20989.37	46.2 PK	74	-27.8	-53.82	4.76	-49.06
4	20990.81	36.04 AV	54	-17.96	-63.98	4.76	-59.22

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

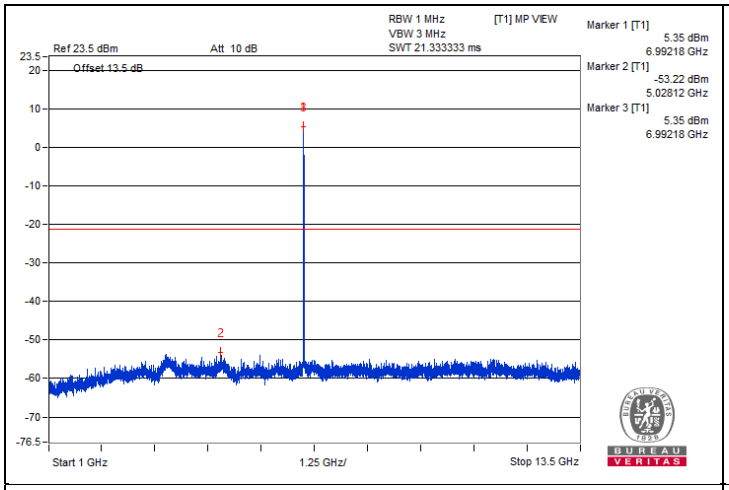
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
5.35 dBm
6.99218 GHz
Marker 2 [T1]
-53.22 dBm
5.02812 GHz
Marker 3 [T1]
5.35 dBm
6.99218 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

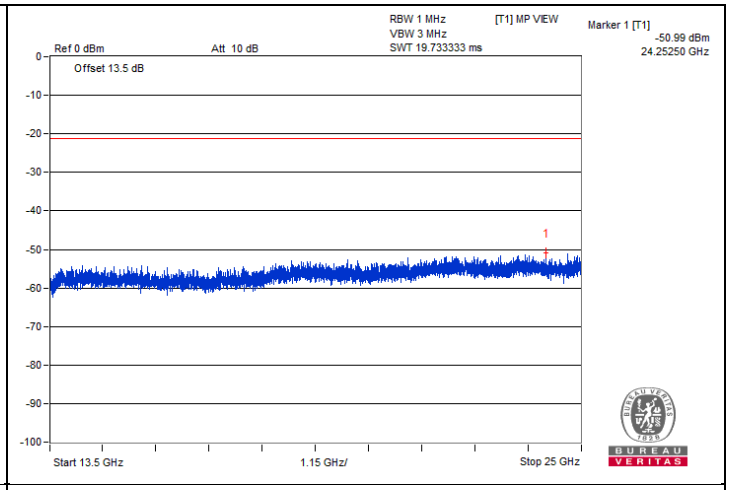
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.99 dBm
24.25250 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

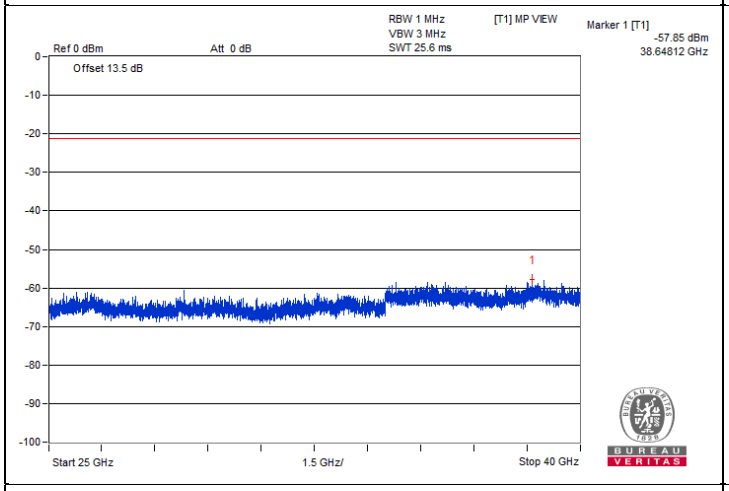
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.85 dBm
38.64812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

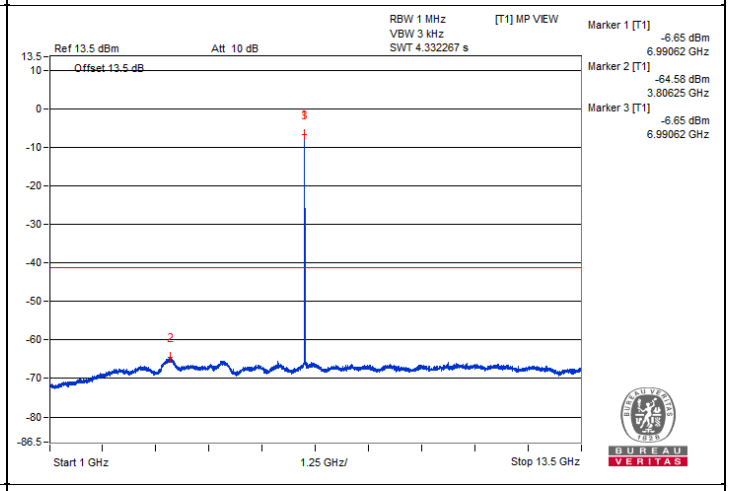
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.65 dBm
6.99062 GHz
Marker 2 [T1]
-64.58 dBm
3.80625 GHz
Marker 3 [T1]
-6.65 dBm
6.99062 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

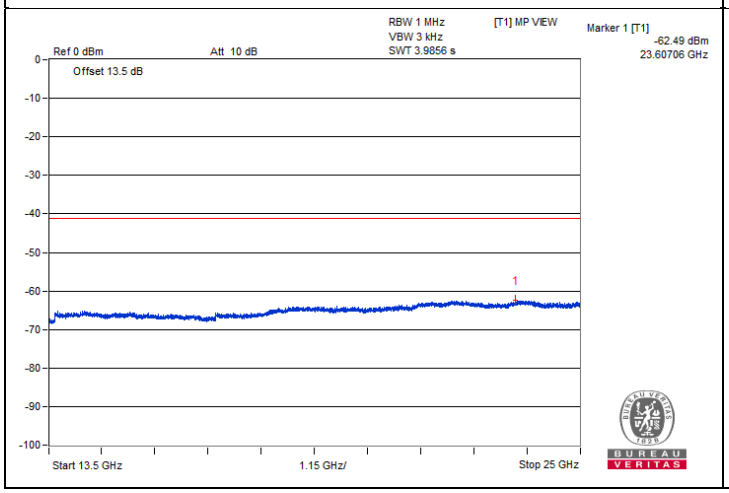
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.49 dBm
23.60706 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

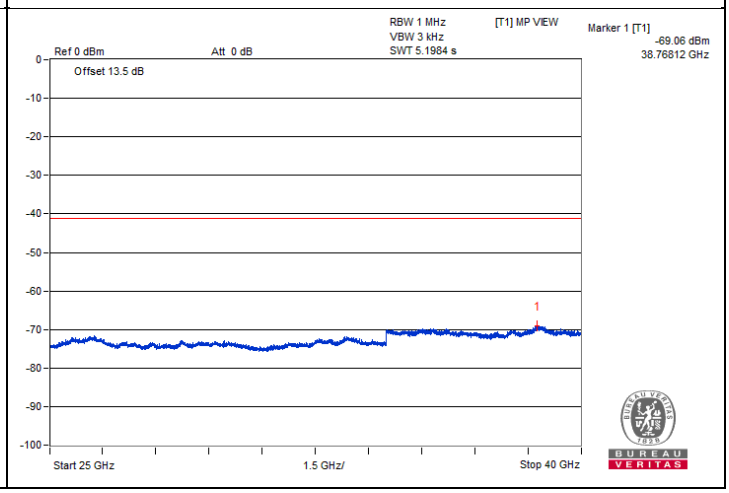
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.06 dBm
38.76812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU106) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14227.37	45.15 PK	88.2	-43.05	-54.87	4.76	-50.11
2	#14244.62	34.31 AV	68.2	-33.89	-65.71	4.76	-60.95
3	21348.75	45.47 PK	74	-28.53	-54.55	4.76	-49.79
4	21354.5	35.77 AV	54	-18.23	-64.25	4.76	-59.49

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

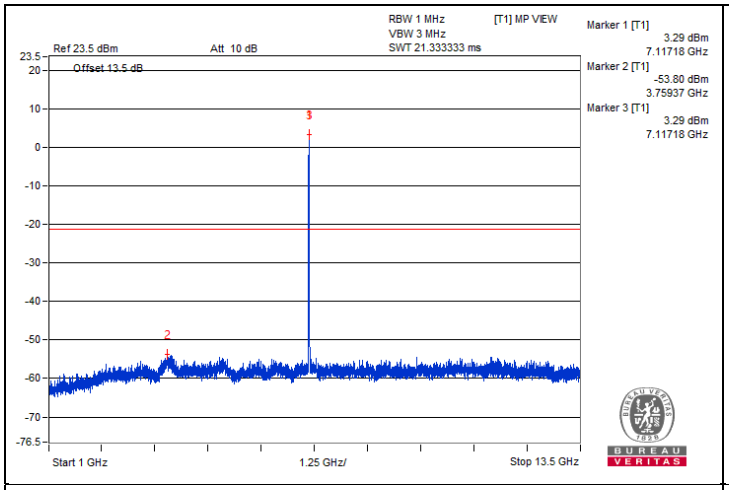
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
3.29 dBm
7.11718 GHz
Marker 2 [T1]
-53.80 dBm
3.75937 GHz
Marker 3 [T1]
3.29 dBm
7.11718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

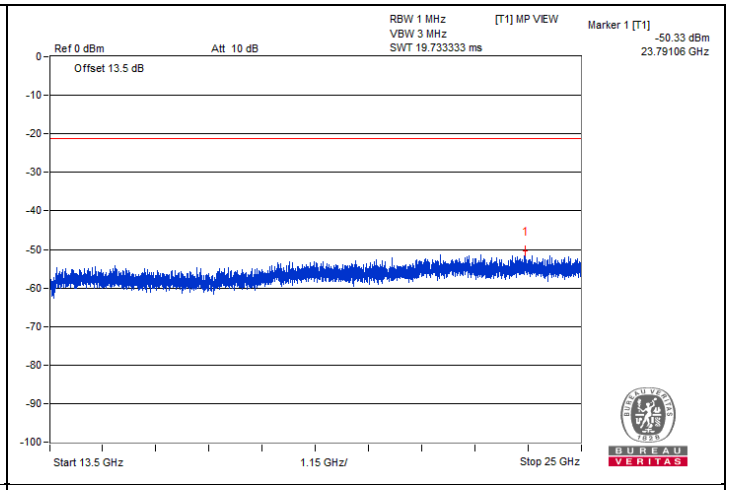
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.33 dBm
23.79106 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

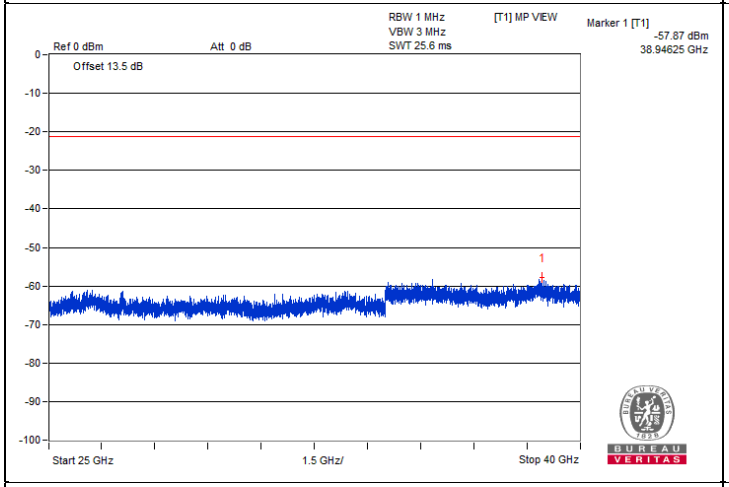
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.87 dBm
38.94625 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

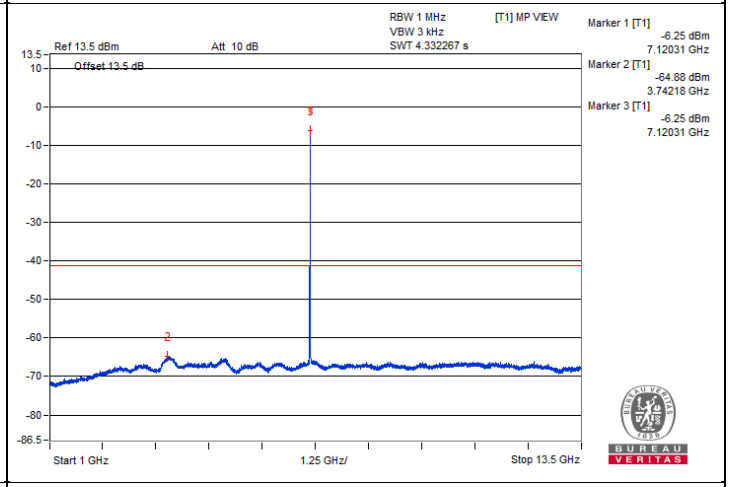
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-6.25 dBm
7.12031 GHz
Marker 2 [T1]
-64.88 dBm
3.74218 GHz
Marker 3 [T1]
-6.25 dBm
7.12031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

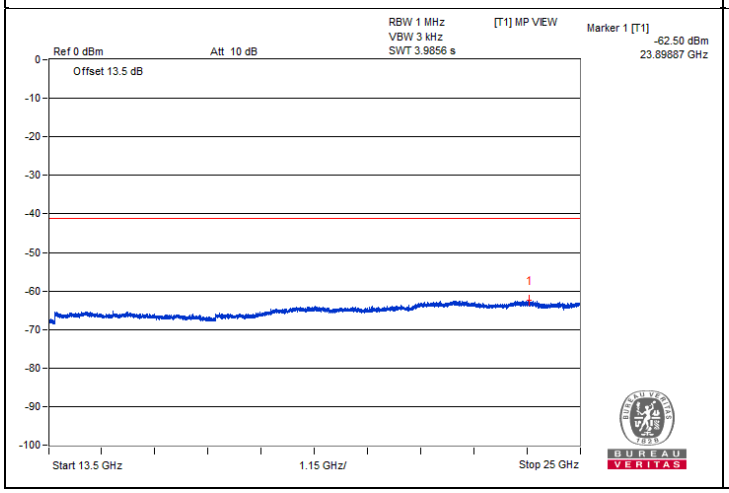
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.50 dBm
23.89887 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

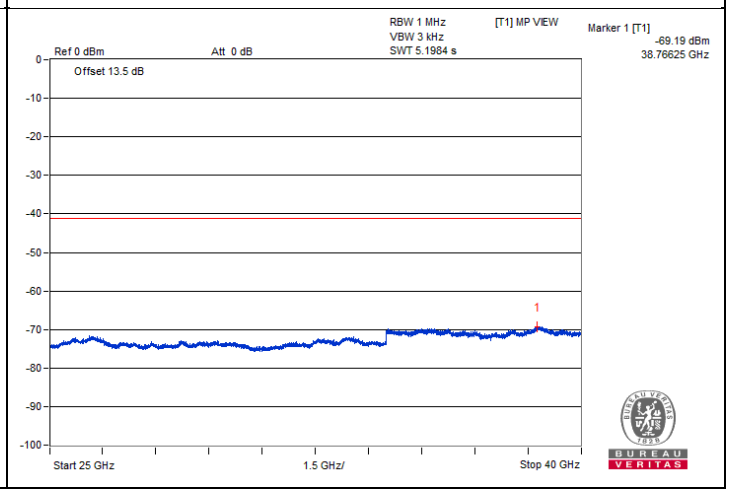
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.19 dBm
38.76625 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	61.34 PK	88.2	-26.86	-38.01	4.09	-33.92
2	#7125	50.76 AV	68.2	-17.44	-48.59	4.09	-44.50

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

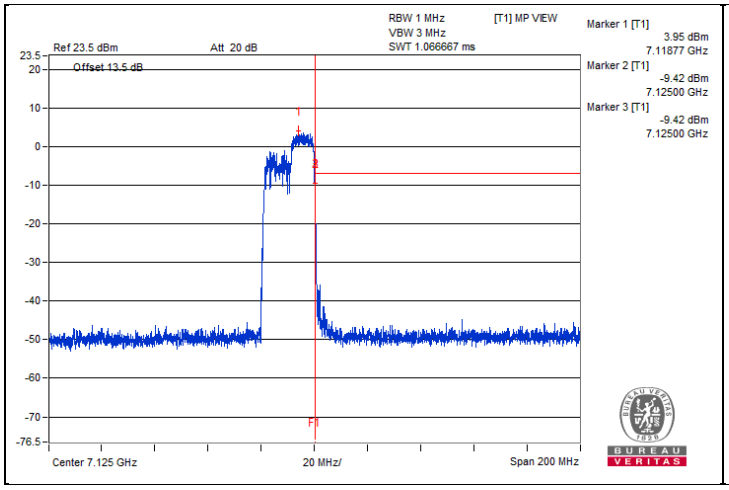

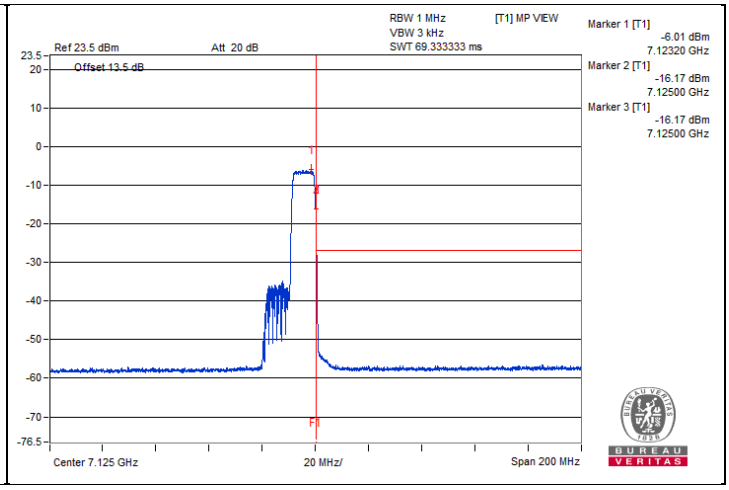

20 MHz Preamble 802.11be (RU52+26) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11914.06	54.14 PK	74	-19.86	-45.88	4.76	-41.12
2	11907.81	42.8 AV	54	-11.2	-57.22	4.76	-52.46
3	17861.37	44.04 PK	74	-29.96	-55.98	4.76	-51.22
4	17855.62	33.86 AV	54	-20.14	-66.16	4.76	-61.40

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

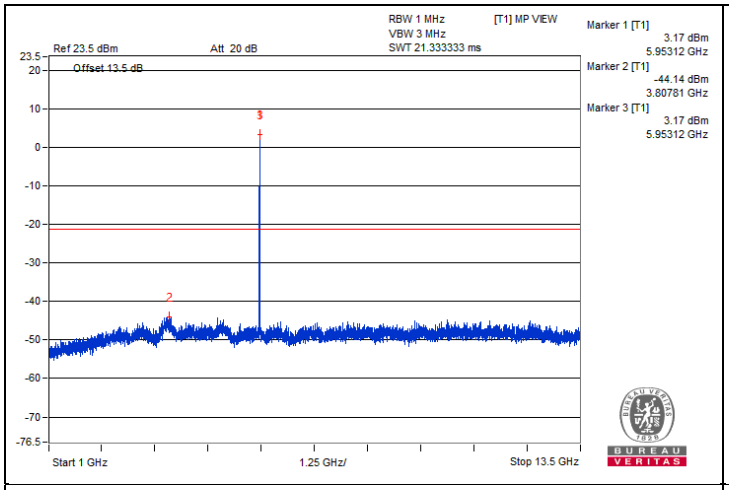
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.17 dBm
5.95312 GHz
Marker 2 [T1]
-44.14 dBm
3.80781 GHz
Marker 3 [T1]
3.17 dBm
5.95312 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

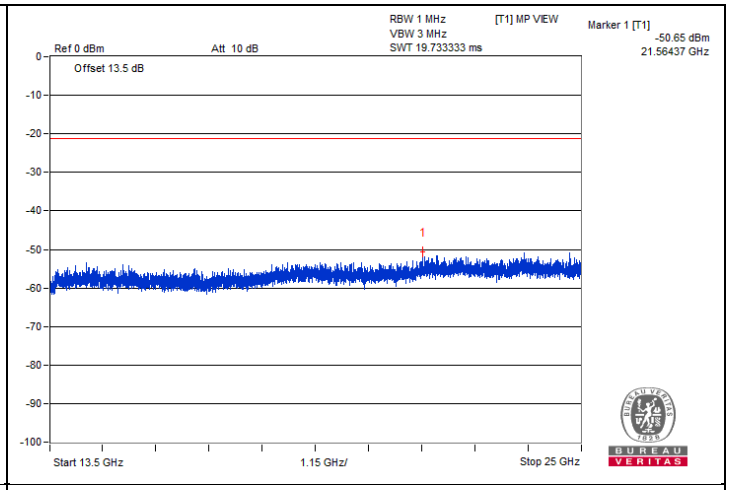
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.65 dBm
21.56437 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

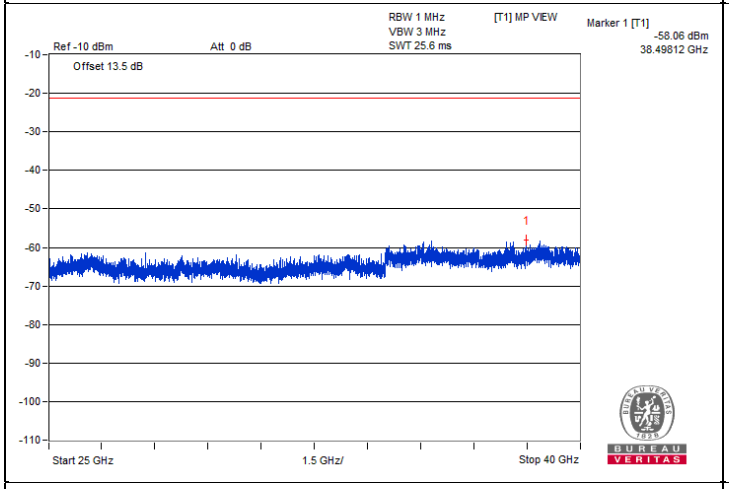
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.06 dBm
38.49812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

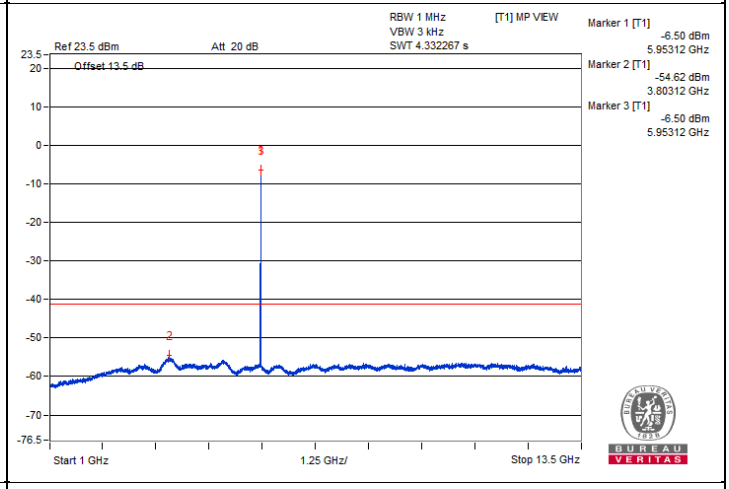
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.50 dBm
5.95312 GHz
Marker 2 [T1]
-54.62 dBm
3.80312 GHz
Marker 3 [T1]
-6.50 dBm
5.95312 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

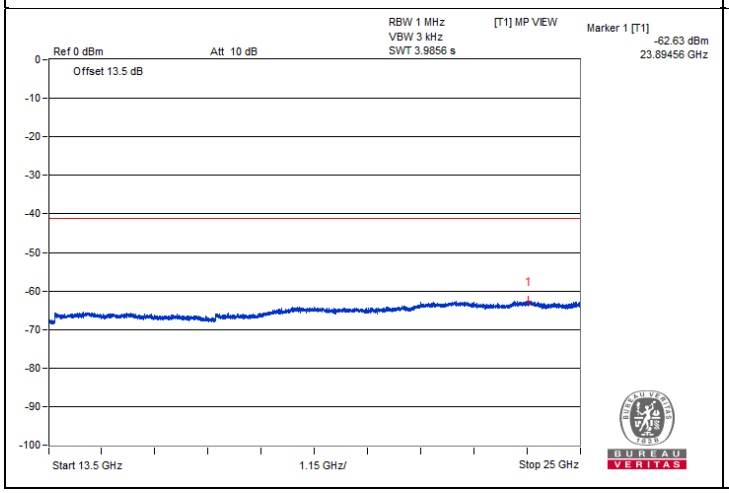
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.63 dBm
23.89456 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

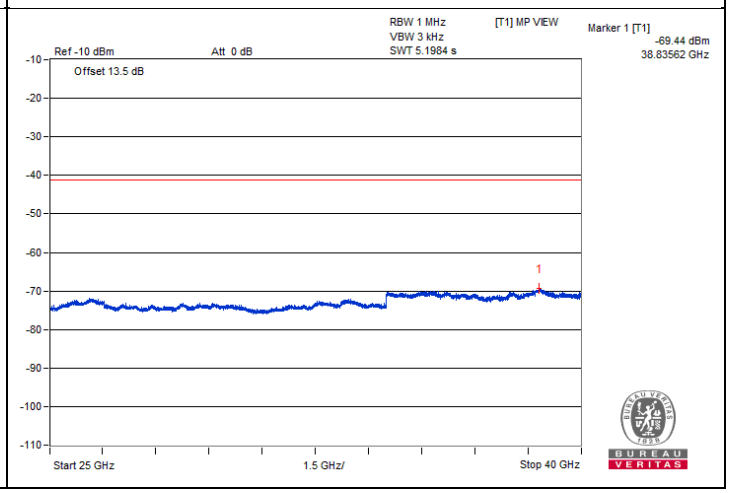
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.44 dBm
38.83562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5916.02	54.92 PK	88.2	-33.28	-45.1	4.76	-40.34
2	#5856.52	43.32 AV	68.2	-24.88	-56.7	4.76	-51.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

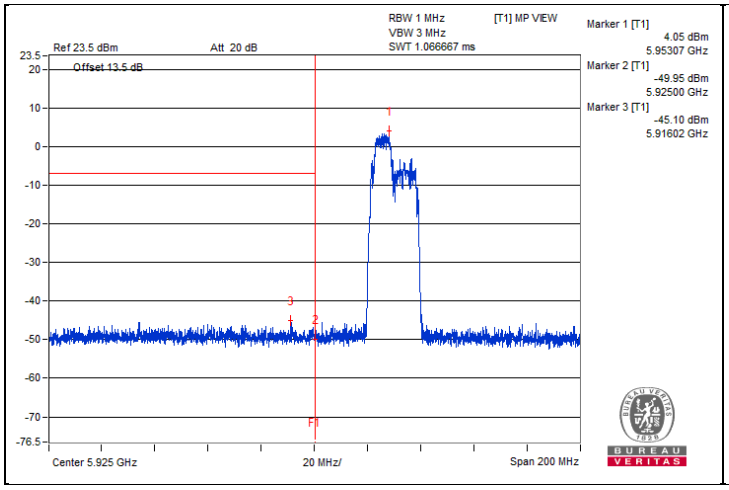

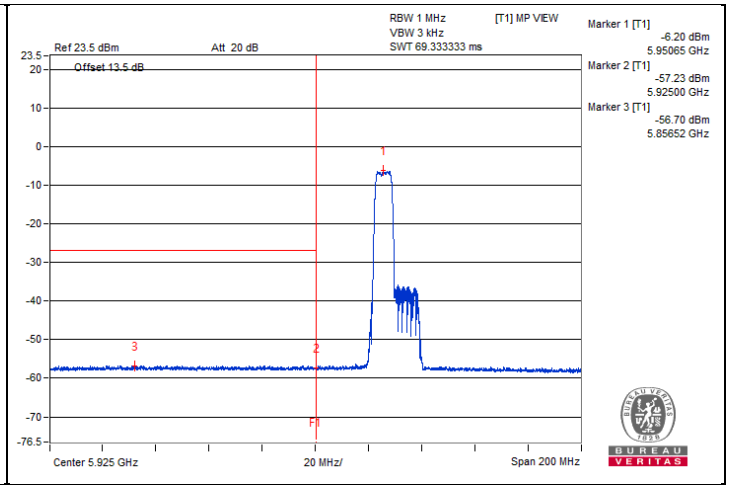

20 MHz Preamble 802.11be (RU52+26) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12839.06	51.95 PK	88.2	-36.25	-48.07	4.76	-43.31
2	#12831.25	42.31 AV	68.2	-25.89	-57.71	4.76	-52.95
3	19254.31	45.56 PK	74	-28.44	-54.46	4.76	-49.70
4	19251.43	35.67 AV	54	-18.33	-64.35	4.76	-59.59

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

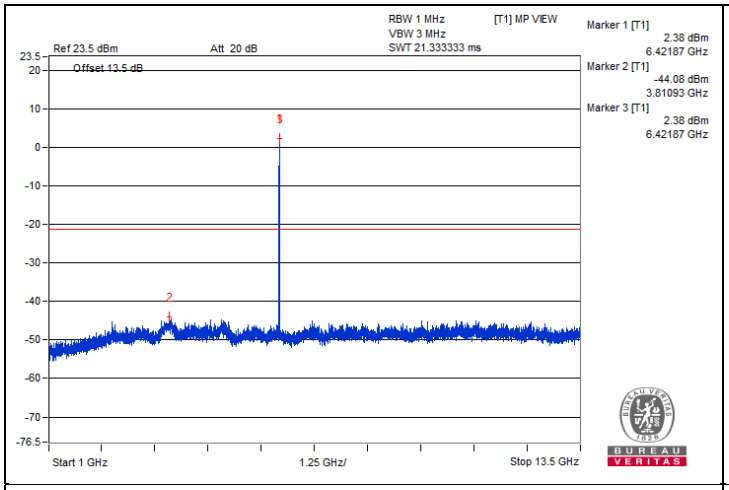
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
2.38 dBm
6.42187 GHz
Marker 2 [T1]
-44.08 dBm
3.81093 GHz
Marker 3 [T1]
2.38 dBm
6.42187 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

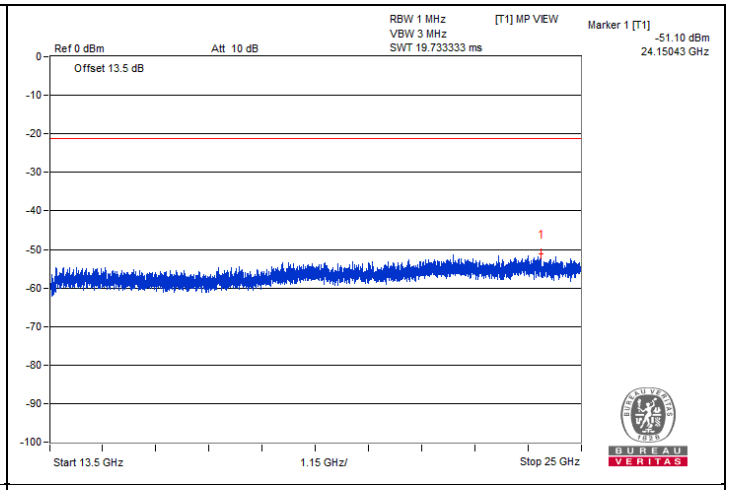
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.10 dBm
24.15043 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

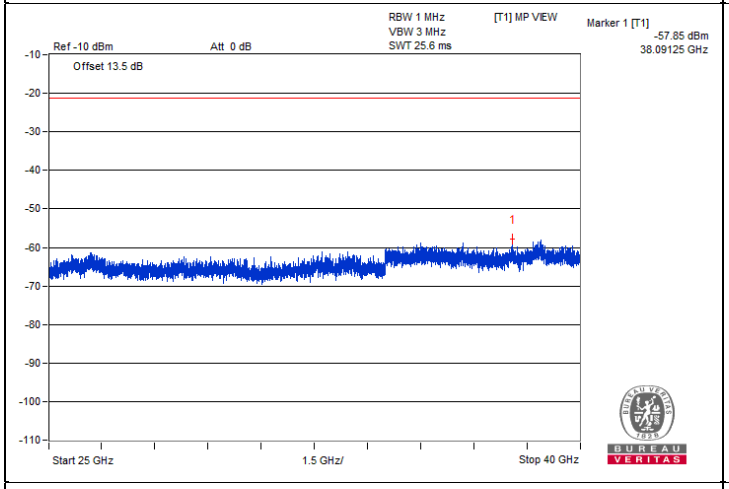
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.85 dBm
38.09125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

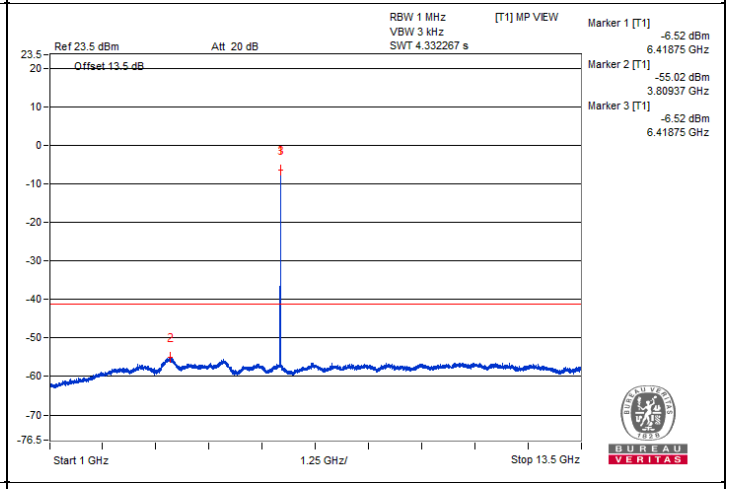
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.52 dBm
6.41875 GHz
Marker 2 [T1]
-55.02 dBm
3.80937 GHz
Marker 3 [T1]
-6.52 dBm
6.41875 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

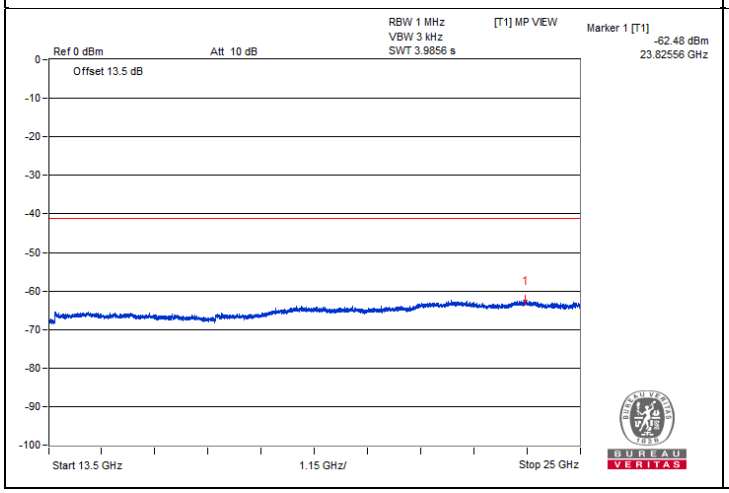
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.48 dBm
23.82556 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

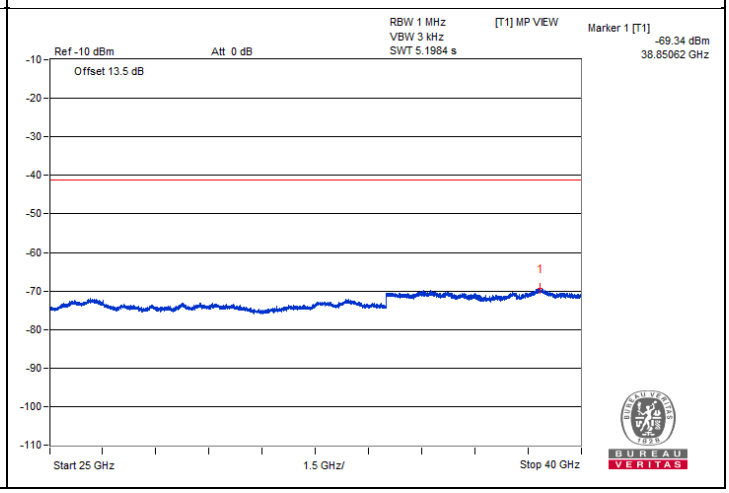
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.34 dBm
38.85062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11be (RU52+26) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12865.62	51.74 PK	88.2	-36.46	-48.28	4.76	-43.52
2	#12879.68	41.7 AV	68.2	-26.5	-58.32	4.76	-53.56
3	19310.37	44.85 PK	74	-29.15	-55.17	4.76	-50.41
4	19300.31	35.36 AV	54	-18.64	-64.66	4.76	-59.90

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

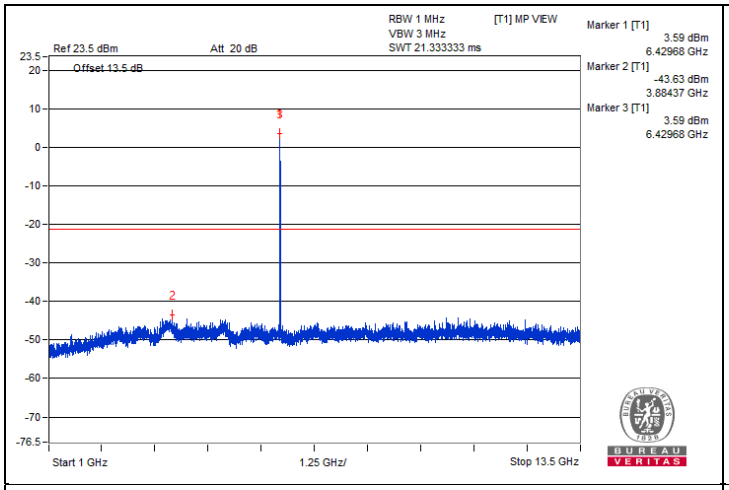
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.59 dBm
6.42968 GHz
Marker 2 [T1]
-43.63 dBm
3.88437 GHz
Marker 3 [T1]
3.59 dBm
6.42968 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

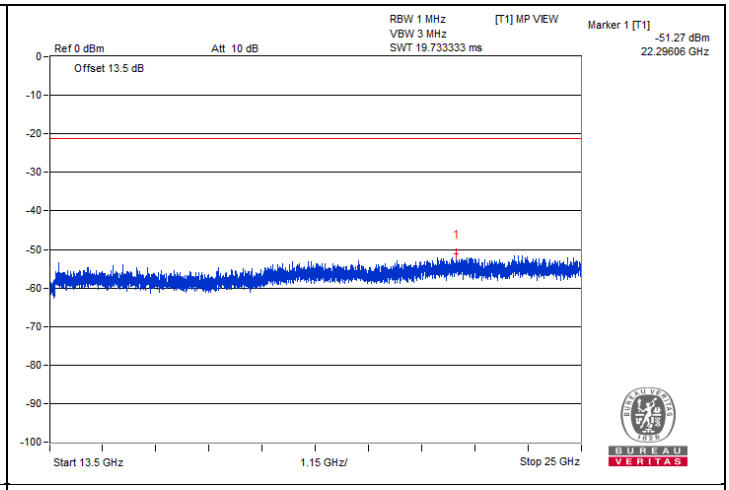
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.27 dBm
22.29606 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

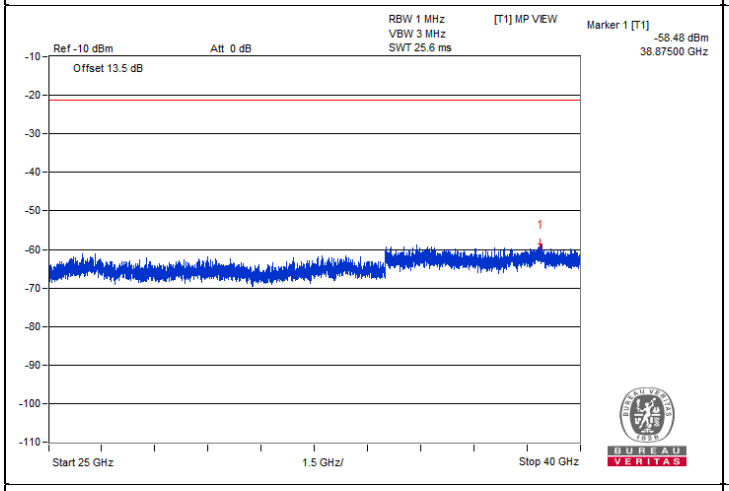
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.48 dBm
38.87500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

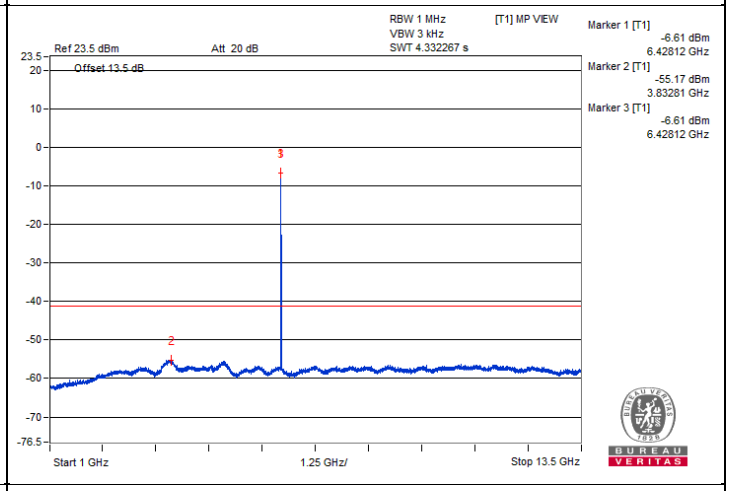
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.61 dBm
6.42812 GHz
Marker 2 [T1]
-55.17 dBm
3.83281 GHz
Marker 3 [T1]
-6.61 dBm
6.42812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

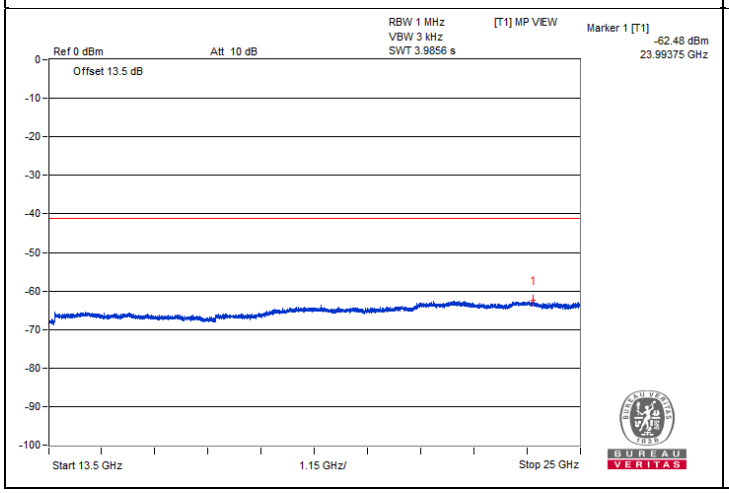
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.48 dBm
23.99375 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

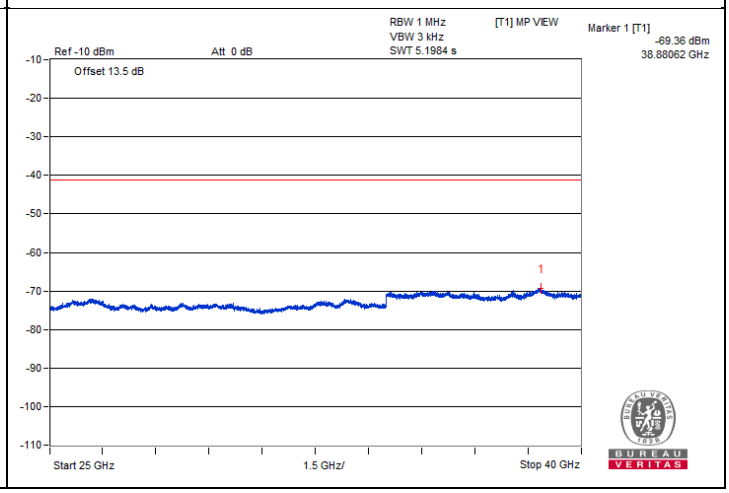
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.36 dBm
38.88062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11be (RU52+26) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13075	51.09 PK	88.2	-37.11	-48.93	4.76	-44.17
2	#13071.87	41.87 AV	68.2	-26.33	-58.15	4.76	-53.39
3	19596.43	44.81 PK	74	-29.19	-55.21	4.76	-50.45
4	19603.62	35.16 AV	54	-18.84	-64.86	4.76	-60.10

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

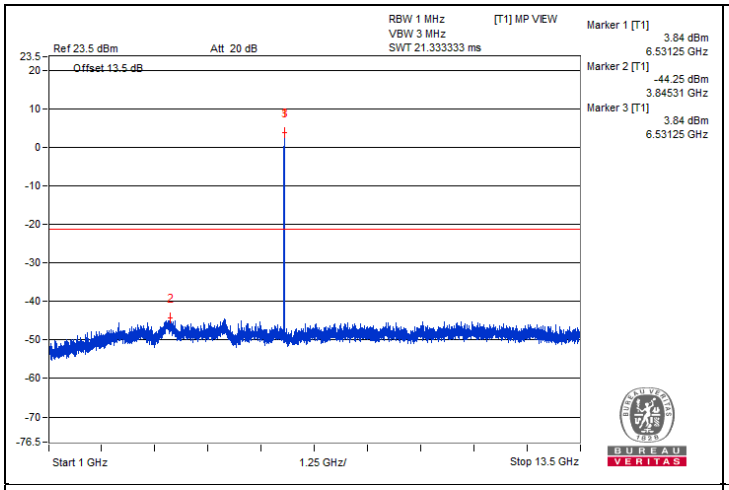
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.84 dBm
6.53125 GHz
Marker 2 [T1]
-44.25 dBm
3.84531 GHz
Marker 3 [T1]
3.84 dBm
6.53125 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

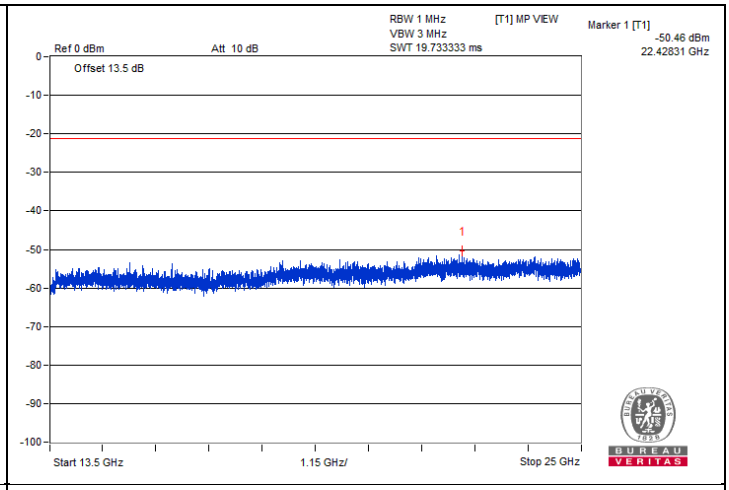
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.46 dBm
22.42831 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

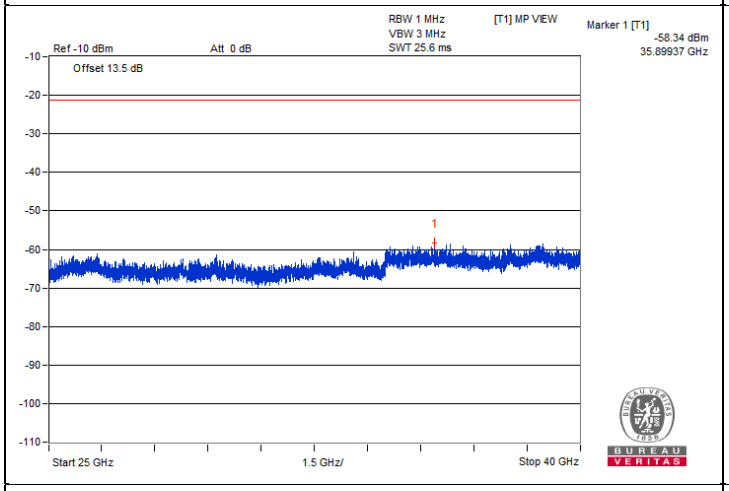
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.34 dBm
35.89937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

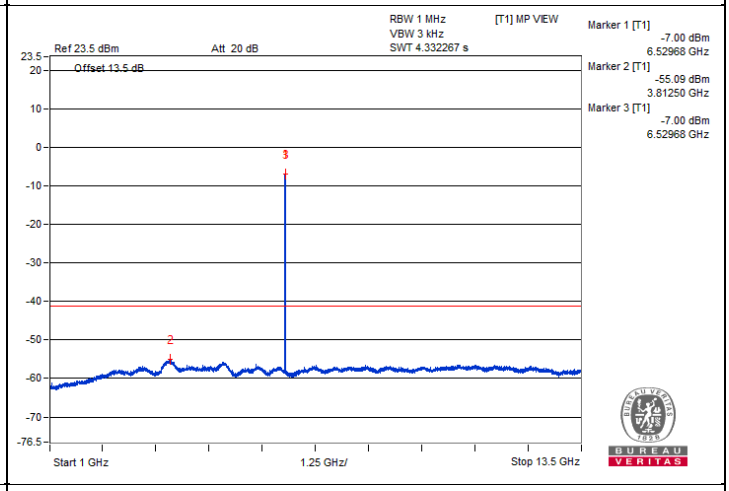
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.00 dBm
6.52968 GHz
Marker 2 [T1]
-55.09 dBm
3.81250 GHz
Marker 3 [T1]
-7.00 dBm
6.52968 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

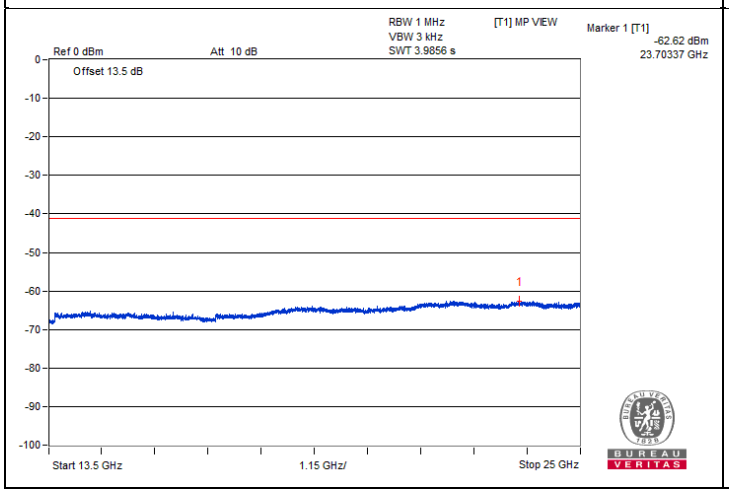
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.62 dBm
23.70337 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

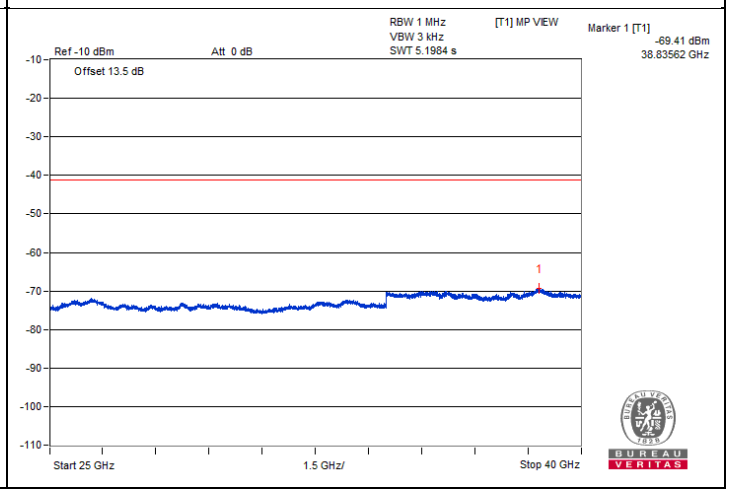
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.41 dBm
38.83562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11be (RU52+26) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13705.56	42.68 PK	88.2	-45.52	-57.34	4.76	-52.58
2	#13719.93	33.73 AV	68.2	-34.47	-66.29	4.76	-61.53
3	20558.12	45.94 PK	74	-28.06	-54.08	4.76	-49.32
4	20562.43	35.18 AV	54	-18.82	-64.84	4.76	-60.08

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

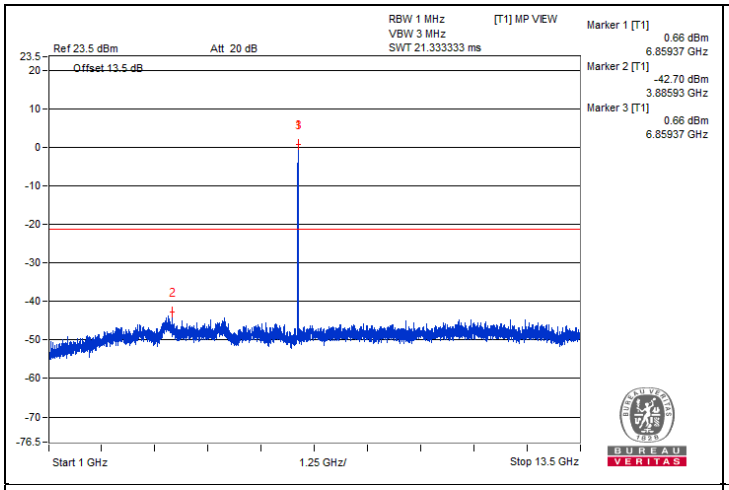
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
0.66 dBm
6.85937 GHz
Marker 2 [T1]
-42.70 dBm
3.88593 GHz
Marker 3 [T1]
0.66 dBm
6.85937 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

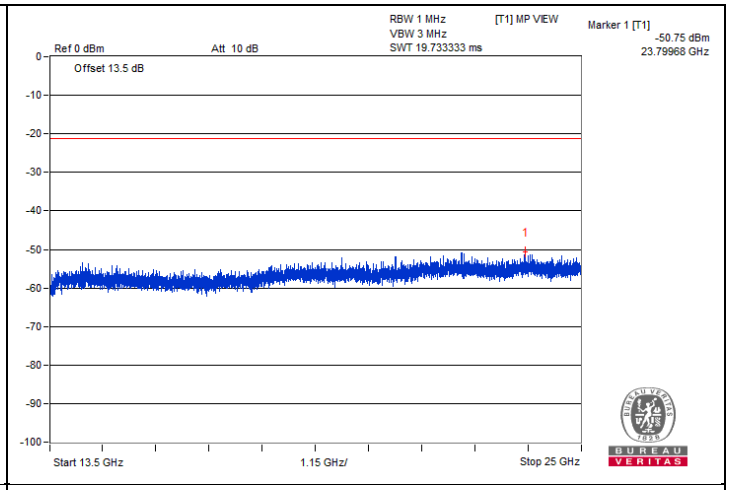
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.75 dBm
23.79968 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

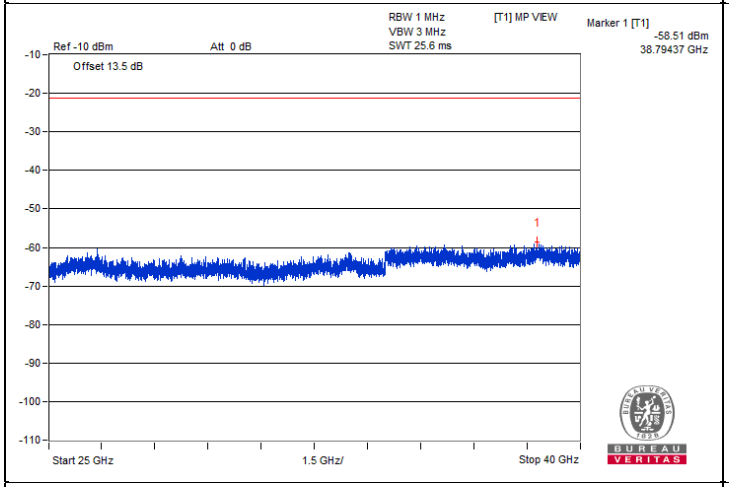
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.51 dBm
38.79437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

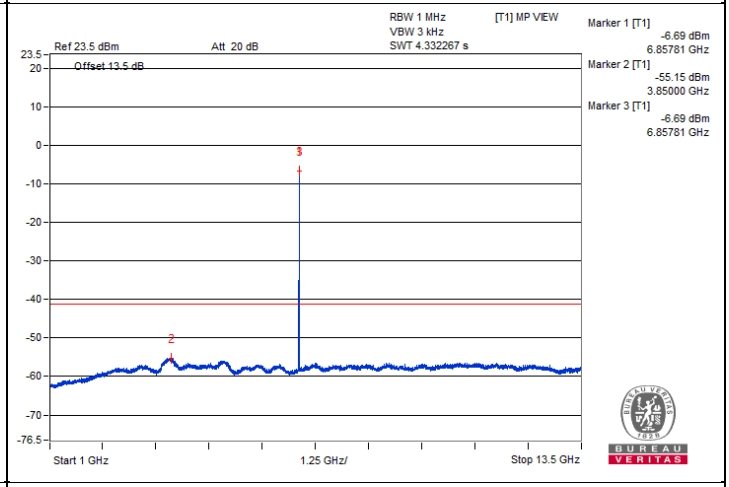
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.69 dBm
6.85781 GHz
Marker 2 [T1]
-55.15 dBm
3.85000 GHz
Marker 3 [T1]
-6.69 dBm
6.85781 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

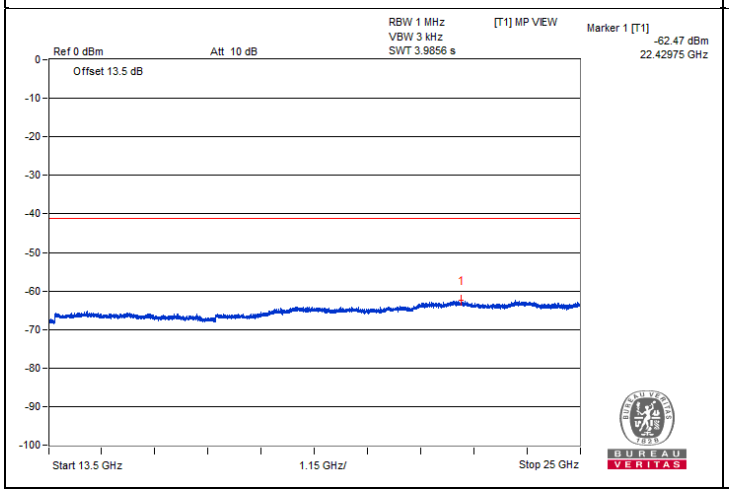
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.47 dBm
22.42975 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

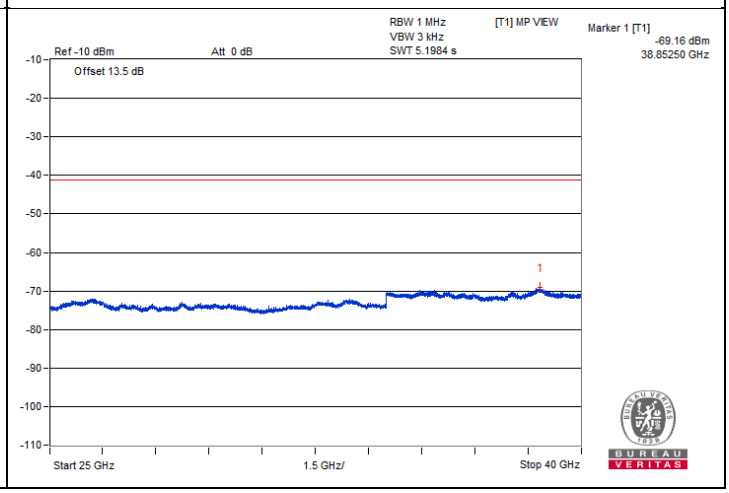
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.16 dBm
38.85250 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11be (RU52+26) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14246.06	44.95 PK	88.2	-43.25	-55.07	4.76	-50.31
2	#14241.75	33.95 AV	68.2	-34.25	-66.07	4.76	-61.31
3	21345.87	46.44 PK	74	-27.56	-53.58	4.76	-48.82
4	21330.06	34.97 AV	54	-19.03	-65.05	4.76	-60.29

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

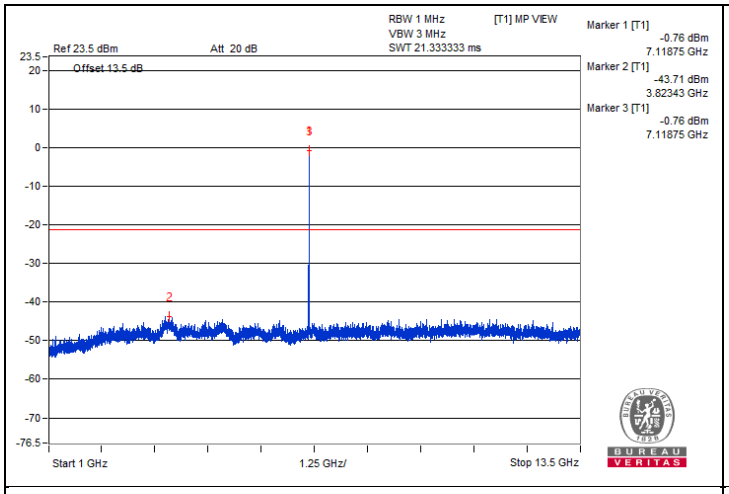
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-0.76 dBm
7.11875 GHz
Marker 2 [T1]
-43.71 dBm
3.82343 GHz
Marker 3 [T1]
-0.76 dBm
7.11875 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

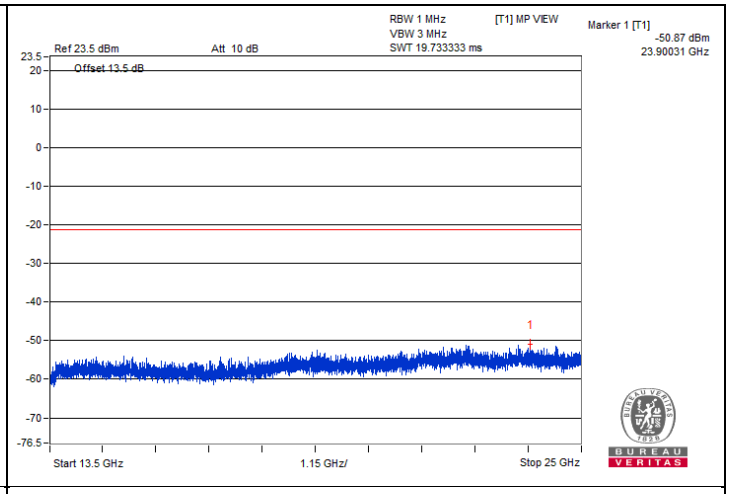
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.87 dBm
23.90031 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

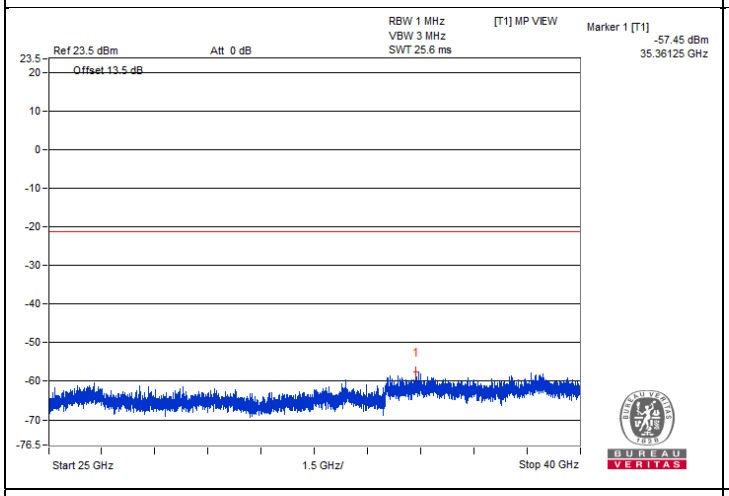
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.45 dBm
35.36125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

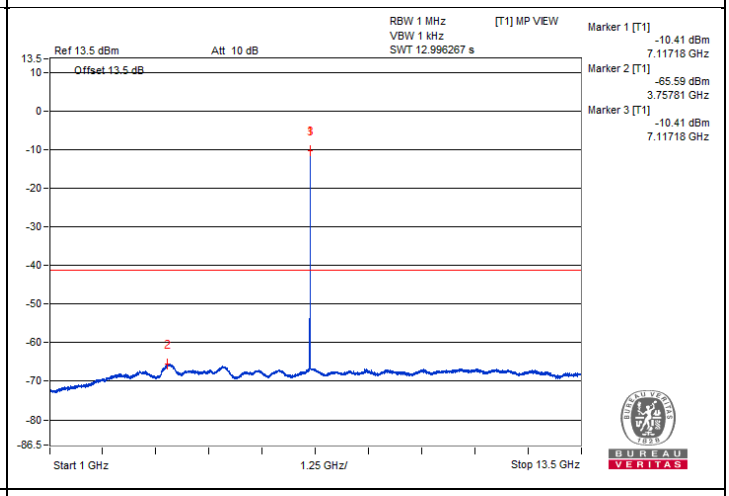
RBW 1 MHz
VBW 1 kHz
SWT 12.996267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-10.41 dBm
7.11718 GHz
Marker 2 [T1]
-65.59 dBm
3.75781 GHz
Marker 3 [T1]
-10.41 dBm
7.11718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

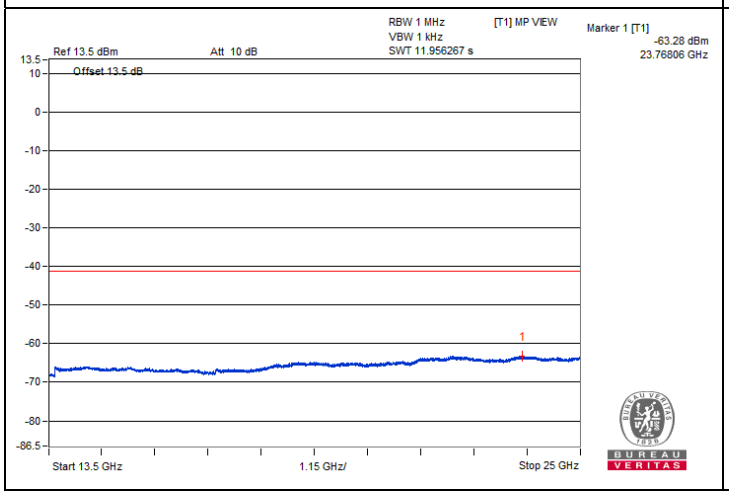
RBW 1 MHz
VBW 1 kHz
SWT 11.956267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-63.28 dBm
23.76806 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

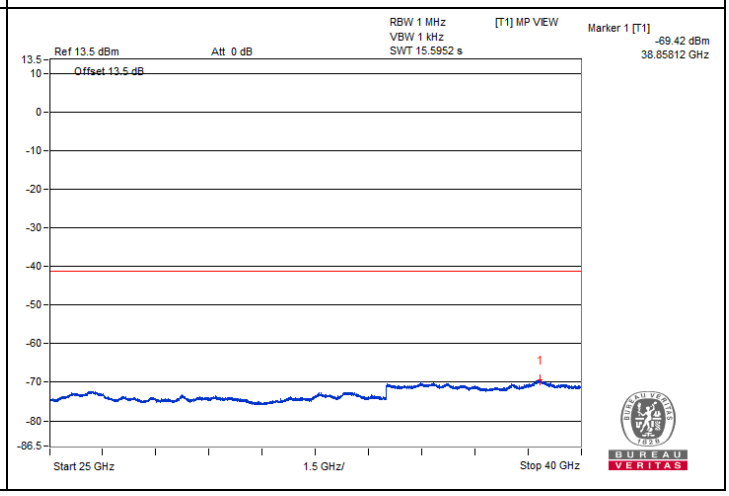
RBW 1 MHz
VBW 1 kHz
SWT 15.5952 s
[T1] MP VIEW
Ref 13.5 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.42 dBm
38.85812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	70.64 PK	88.2	-17.56	-28.71	4.09	-24.62
2	#7125	44.44 AV	68.2	-23.76	-54.91	4.09	-50.82

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

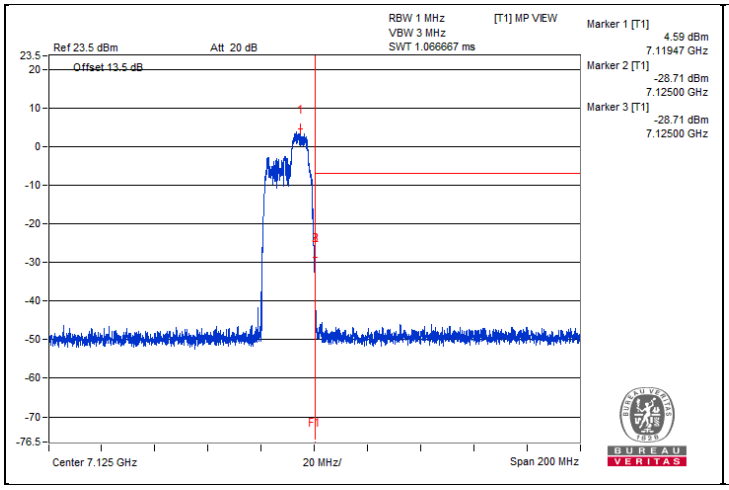

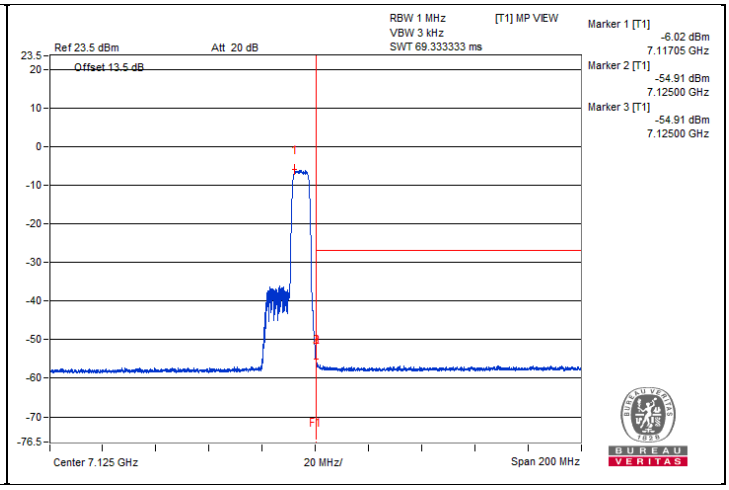

20 MHz Preamble 802.11be (RU26+106) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11906.25	52.2 PK	74	-21.8	-47.82	4.76	-43.06
2	11903.12	42.75 AV	54	-11.25	-57.27	4.76	-52.51
3	17857.06	45.04 PK	74	-28.96	-54.98	4.76	-50.22
4	17871.43	33.47 AV	54	-20.53	-66.55	4.76	-61.79

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

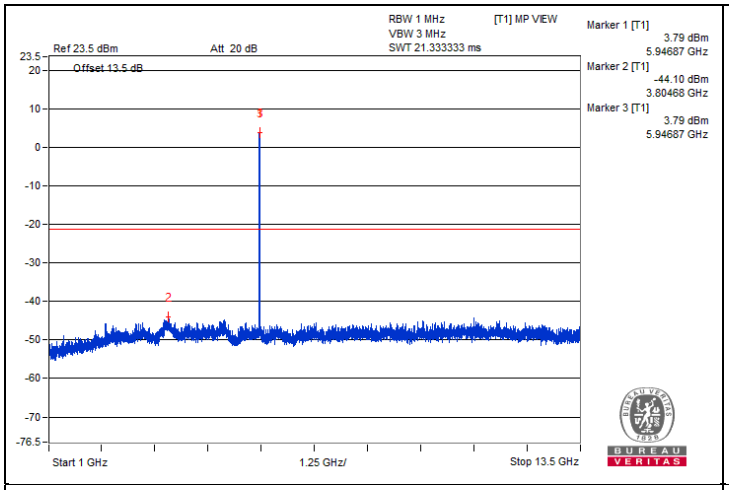
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.79 dBm
5.94687 GHz
Marker 2 [T1]
-44.10 dBm
3.80468 GHz
Marker 3 [T1]
3.79 dBm
5.94687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

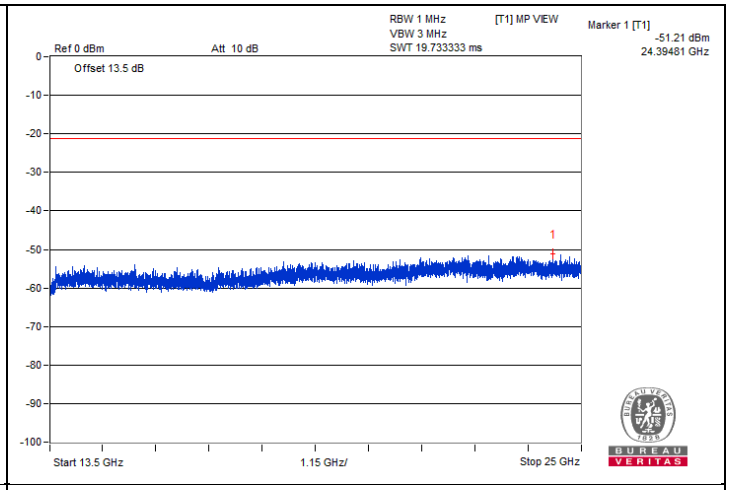
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.21 dBm
24.39481 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

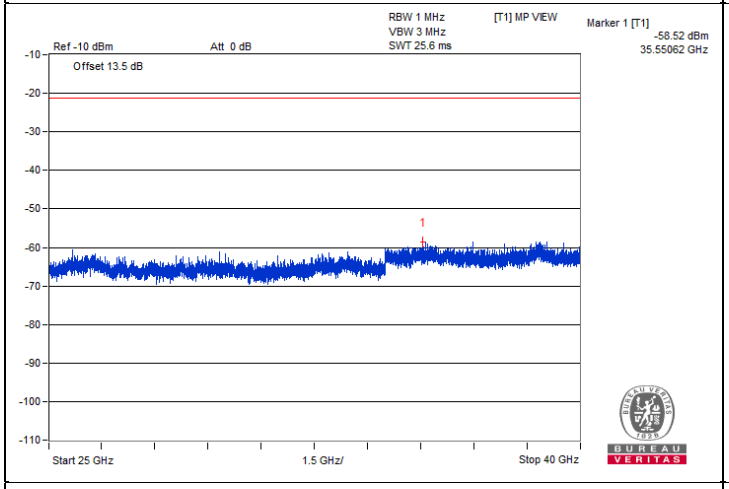
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.52 dBm
35.55062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

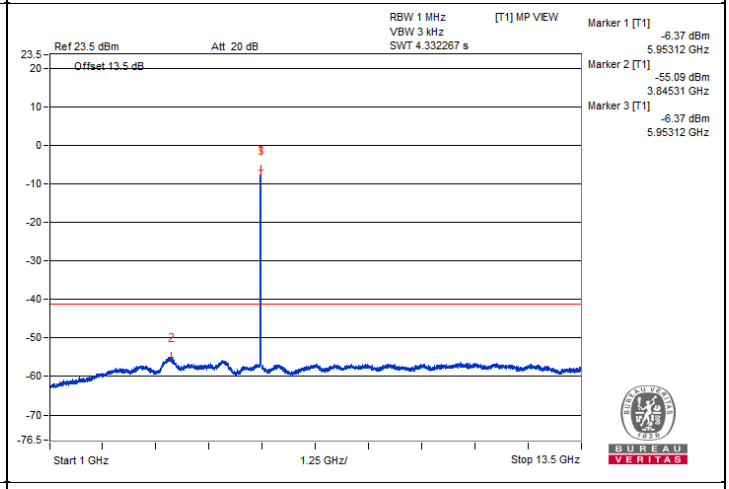
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.37 dBm
5.95312 GHz
Marker 2 [T1]
-55.09 dBm
3.84531 GHz
Marker 3 [T1]
-6.37 dBm
5.95312 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

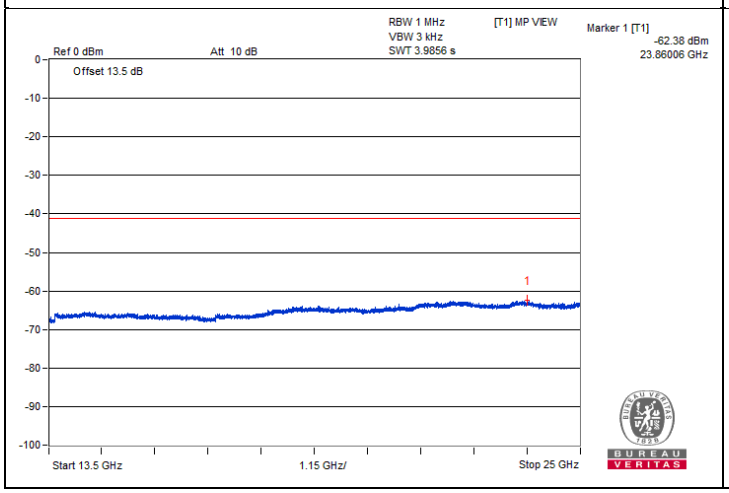
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.38 dBm
23.86006 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

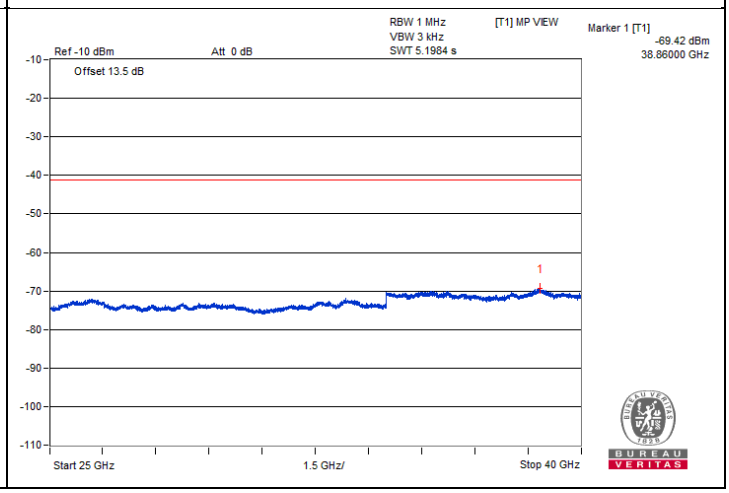
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.42 dBm
38.86000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5854.15	56.12 PK	88.2	-32.08	-43.9	4.76	-39.14
2	#5860.17	43.85 AV	68.2	-24.35	-56.17	4.76	-51.41

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

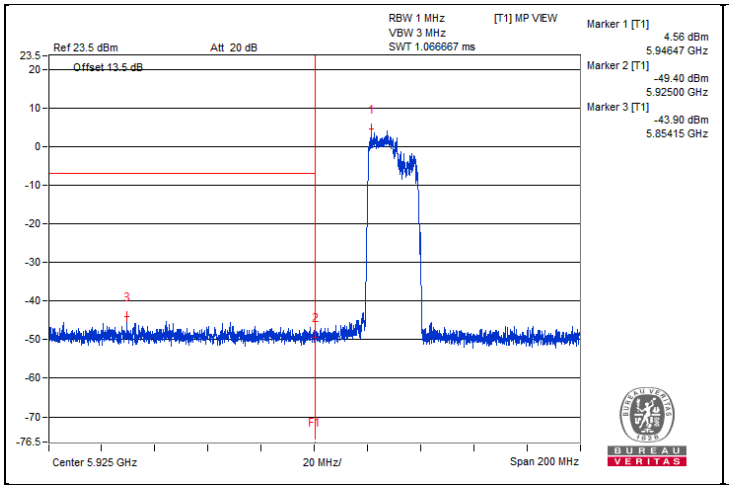

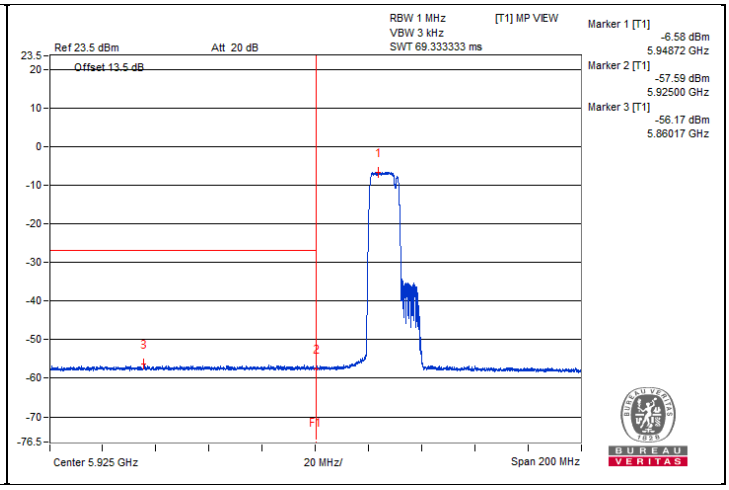

20 MHz Preamble 802.11be (RU26+106) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12820.31	52.05 PK	88.2	-36.15	-47.97	4.76	-43.21
2	#12832.81	42.18 AV	68.2	-26.02	-57.84	4.76	-53.08
3	19235.62	45.69 PK	74	-28.31	-54.33	4.76	-49.57
4	19254.31	35.39 AV	54	-18.61	-64.63	4.76	-59.87

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

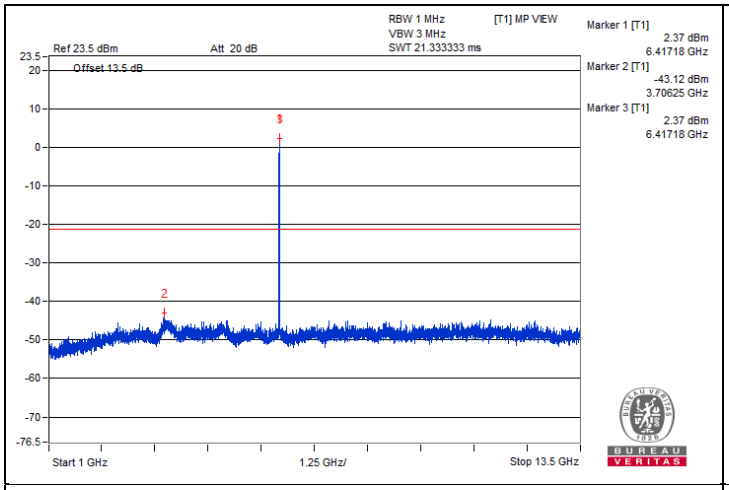
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
2.37 dBm
6.41718 GHz
Marker 2 [T1]
-43.12 dBm
3.70625 GHz
Marker 3 [T1]
2.37 dBm
6.41718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

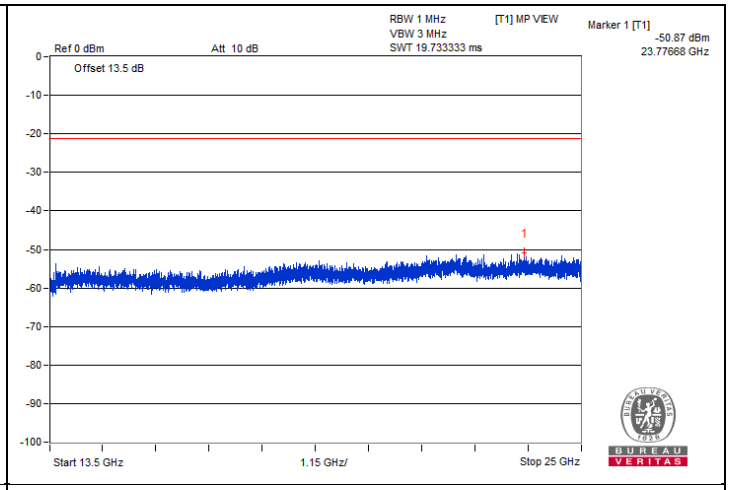
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.87 dBm
23.77668 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

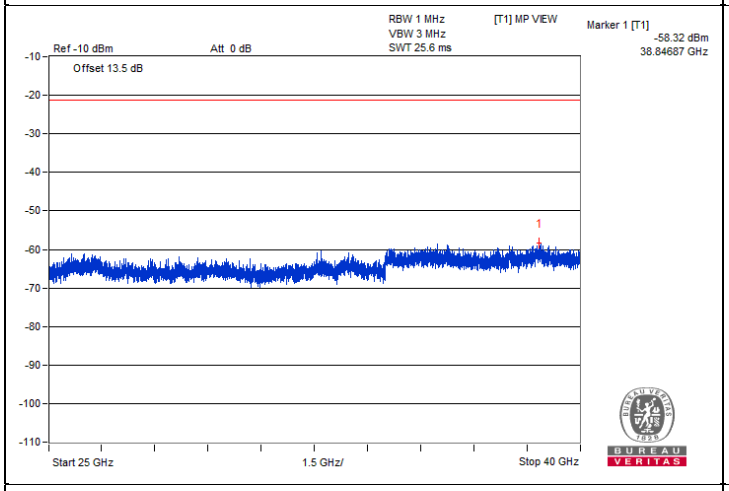
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.32 dBm
38.84687 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

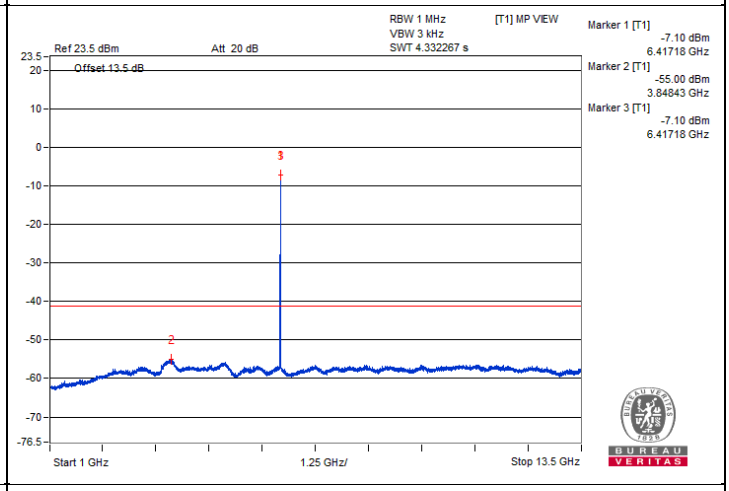
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.10 dBm
6.41718 GHz
Marker 2 [T1]
-55.00 dBm
3.84843 GHz
Marker 3 [T1]
-7.10 dBm
6.41718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

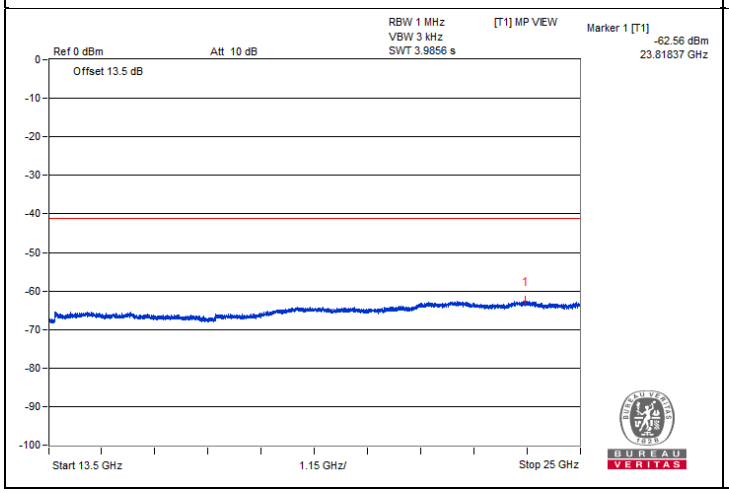
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.56 dBm
23.81837 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

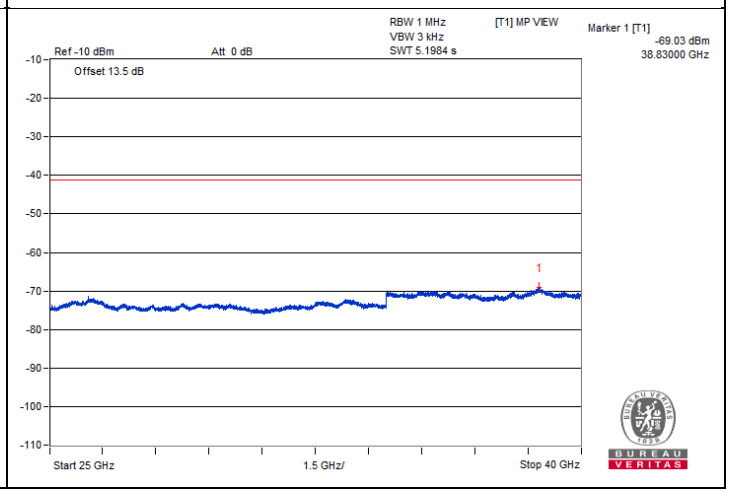
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.03 dBm
38.83000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11be (RU26+106) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12871.87	52.64 PK	88.2	-35.56	-47.38	4.76	-42.62
2	#12871.87	41.9 AV	68.2	-26.3	-58.12	4.76	-53.36
3	19306.06	45.29 PK	74	-28.71	-54.73	4.76	-49.97
4	19314.68	35.5 AV	54	-18.5	-64.52	4.76	-59.76

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

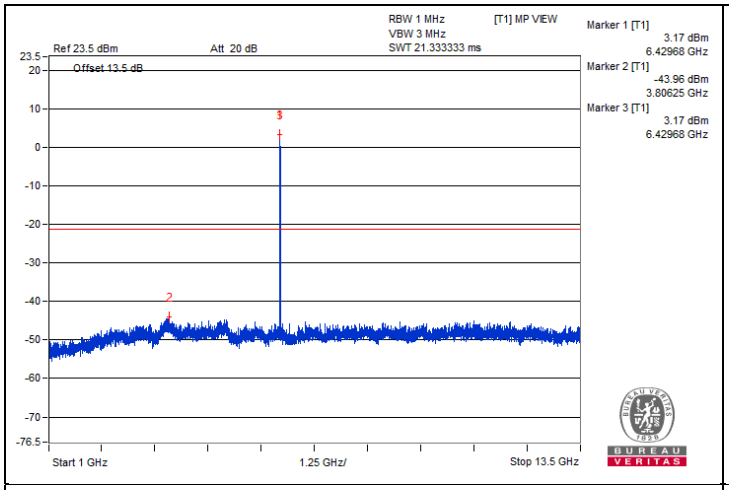
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.17 dBm
6.42968 GHz
Marker 2 [T1]
-43.96 dBm
3.80625 GHz
Marker 3 [T1]
3.17 dBm
6.42968 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

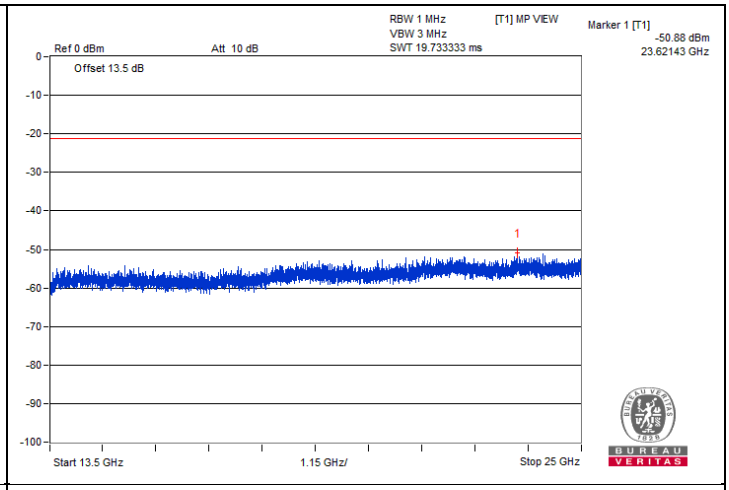
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.88 dBm
23.62143 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

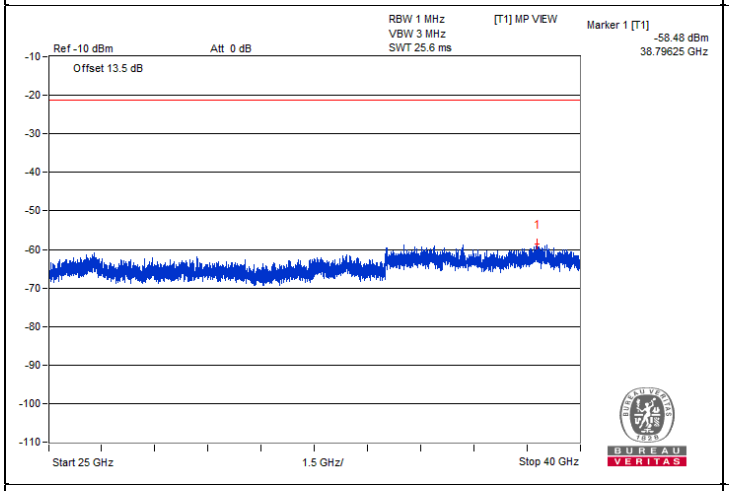
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.48 dBm
38.79625 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

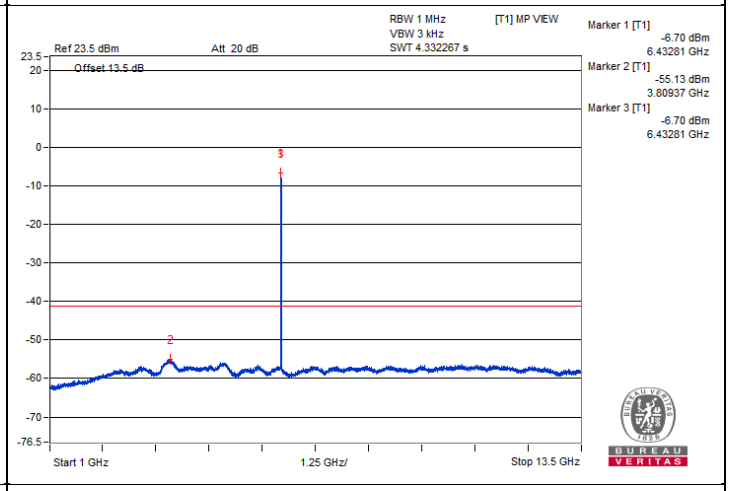
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.70 dBm
6.43281 GHz
Marker 2 [T1]
-55.13 dBm
3.80937 GHz
Marker 3 [T1]
-6.70 dBm
6.43281 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

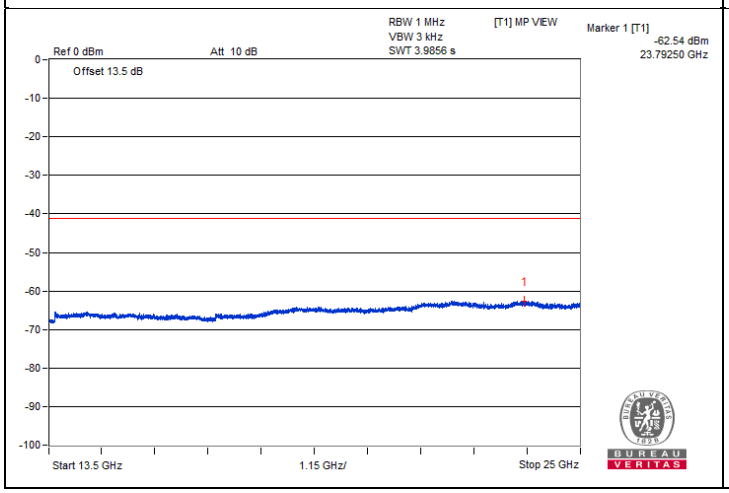
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.54 dBm
23.79250 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

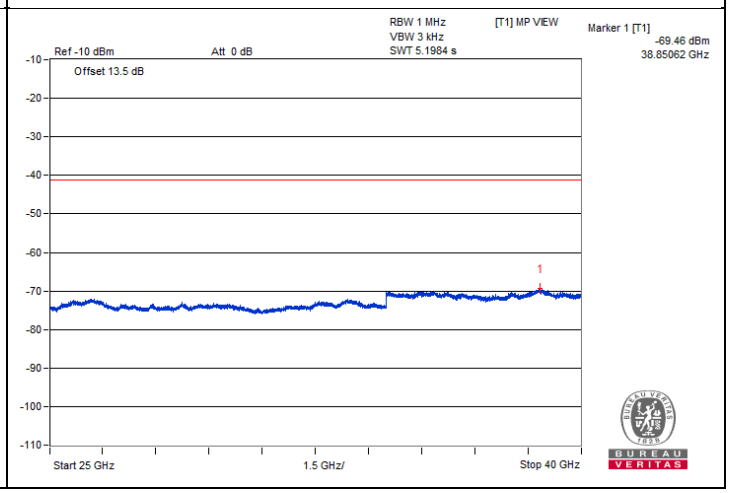
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.46 dBm
38.85062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11be (RU26+106) - Channel 117

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13075	51.97 PK	88.2	-36.23	-48.05	4.76	-43.29
2	#13062.5	42.07 AV	68.2	-26.13	-57.95	4.76	-53.19
3	19613.68	45.35 PK	74	-28.65	-54.67	4.76	-49.91
4	19610.81	34.99 AV	54	-19.01	-65.03	4.76	-60.27

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

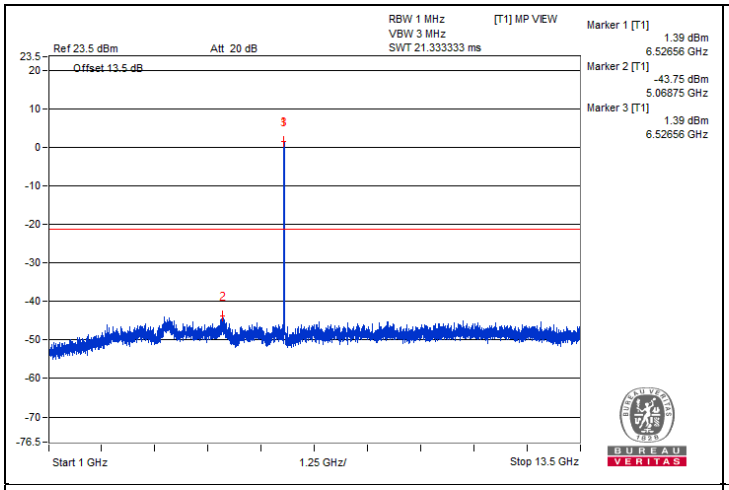
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
1.39 dBm
6.52656 GHz
Marker 2 [T1]
-43.75 dBm
5.06875 GHz
Marker 3 [T1]
1.39 dBm
6.52656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

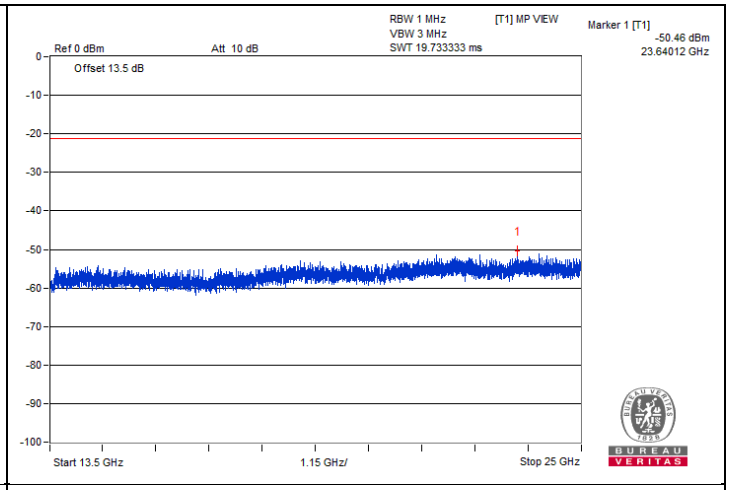
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.46 dBm
23.64012 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

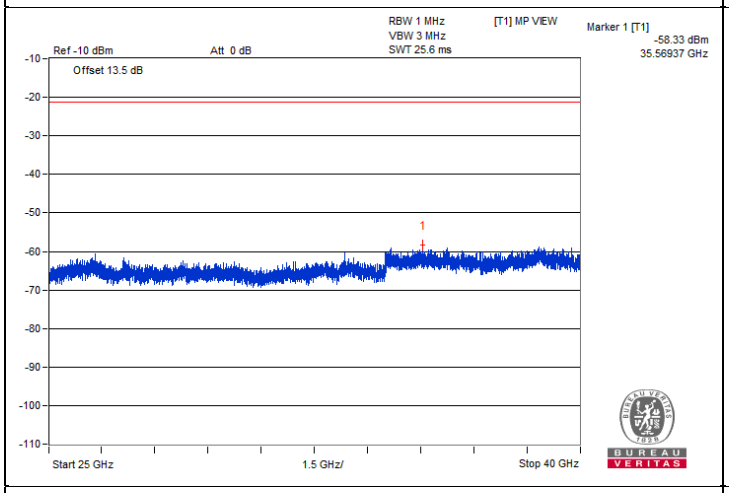
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.33 dBm
35.56937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

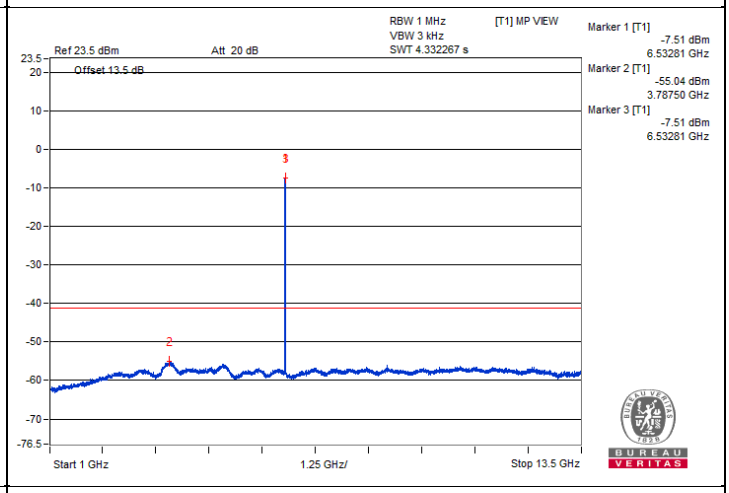
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.51 dBm
6.53281 GHz
Marker 2 [T1]
-55.04 dBm
3.78750 GHz
Marker 3 [T1]
-7.51 dBm
6.53281 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

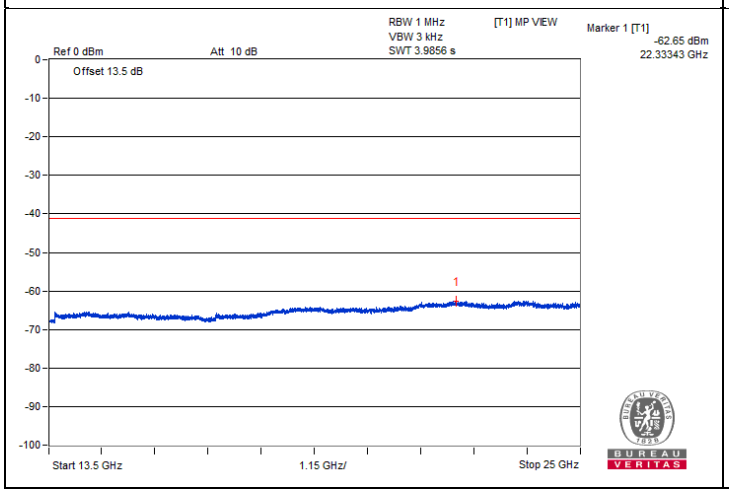
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.65 dBm
22.33343 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

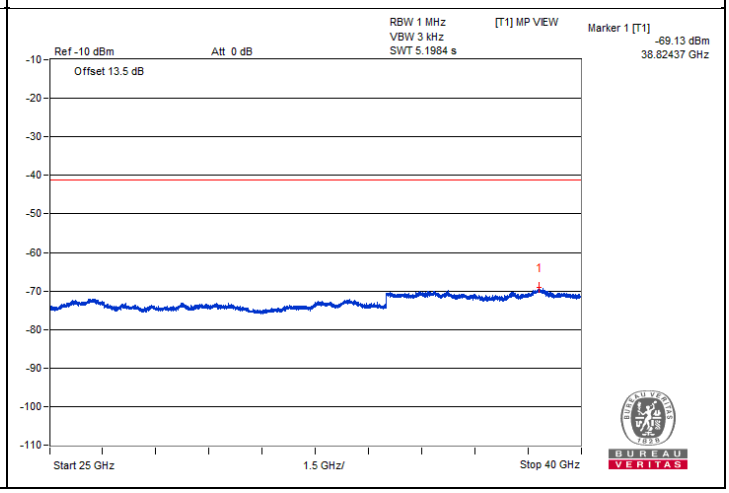
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.13 dBm
38.82437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11be (RU26+106) - Channel 181

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13708.43	43.99 PK	88.2	-44.21	-56.03	4.76	-51.27
2	#13702.68	33.83 AV	68.2	-34.37	-66.19	4.76	-61.43
3	20558.12	44.96 PK	74	-29.04	-55.06	4.76	-50.30
4	20572.5	35.26 AV	54	-18.74	-64.76	4.76	-60.00

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

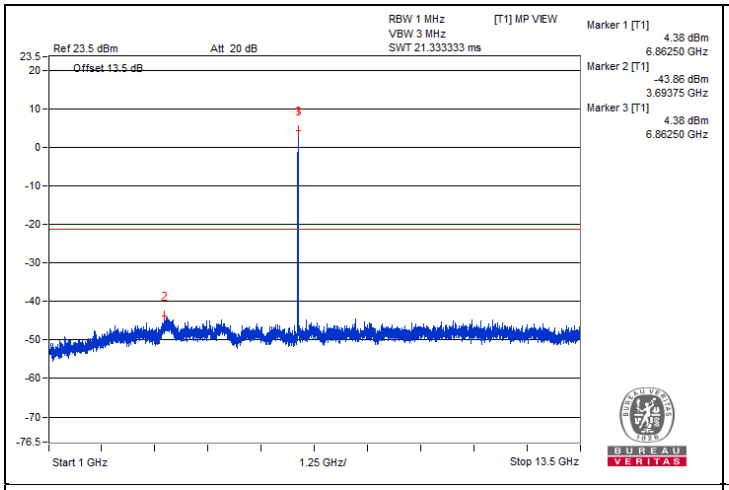
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.38 dBm
6.86250 GHz
Marker 2 [T1]
-43.86 dBm
3.69375 GHz
Marker 3 [T1]
4.38 dBm
6.86250 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

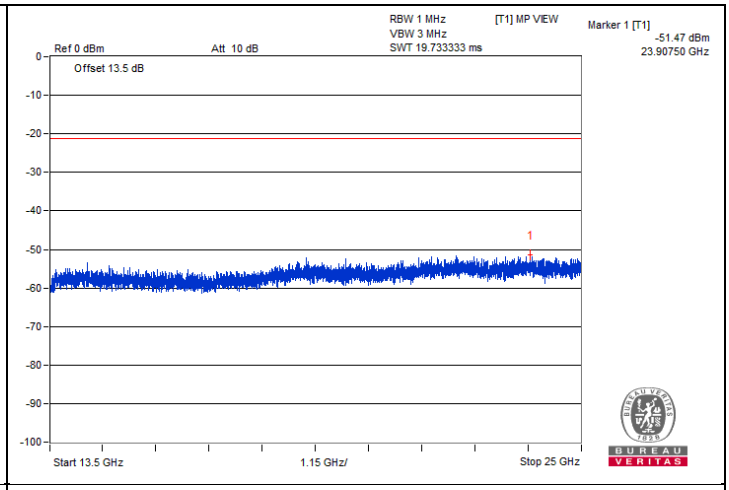
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.47 dBm
23.90750 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

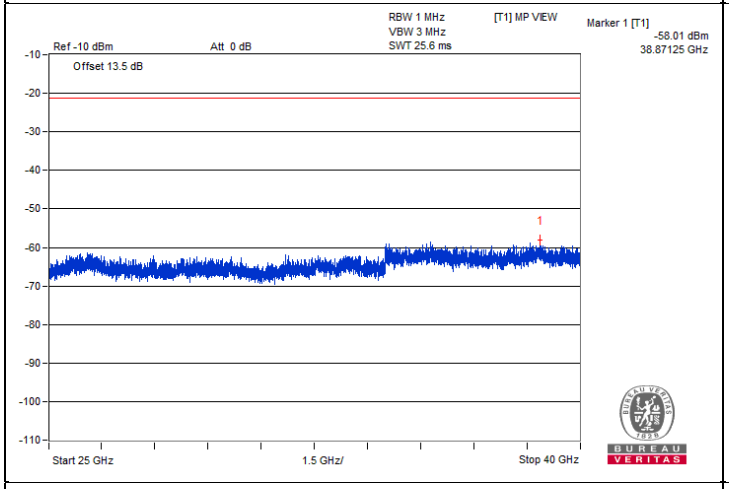
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.01 dBm
38.87125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

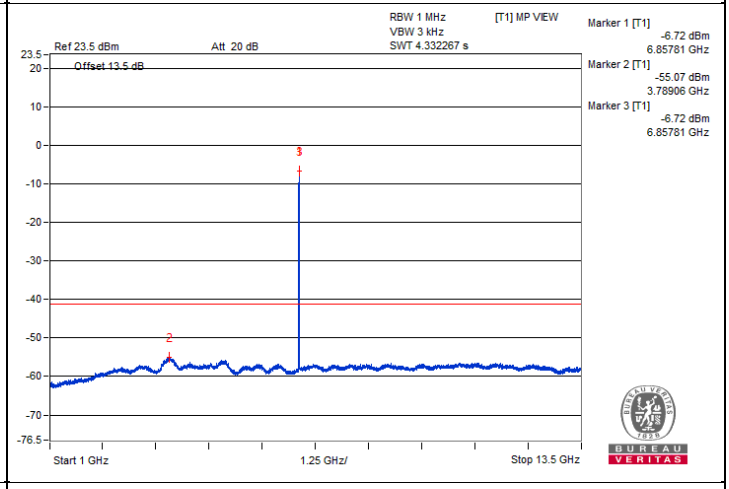
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.72 dBm
6.85781 GHz
Marker 2 [T1]
-55.07 dBm
3.78906 GHz
Marker 3 [T1]
-6.72 dBm
6.85781 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

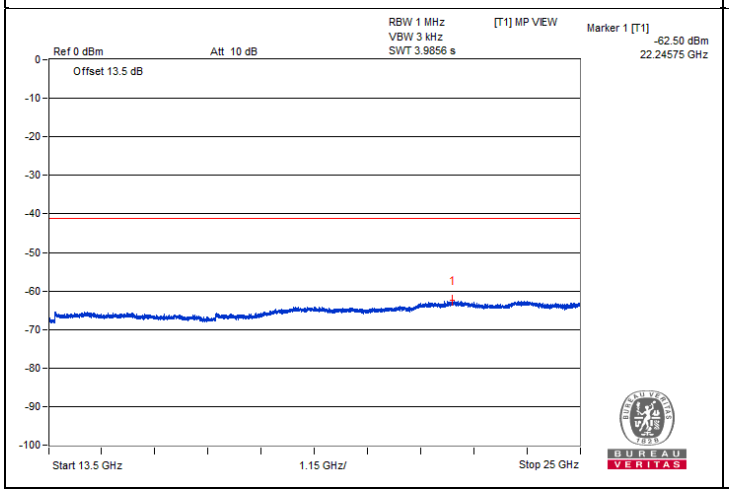
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.50 dBm
22.24575 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

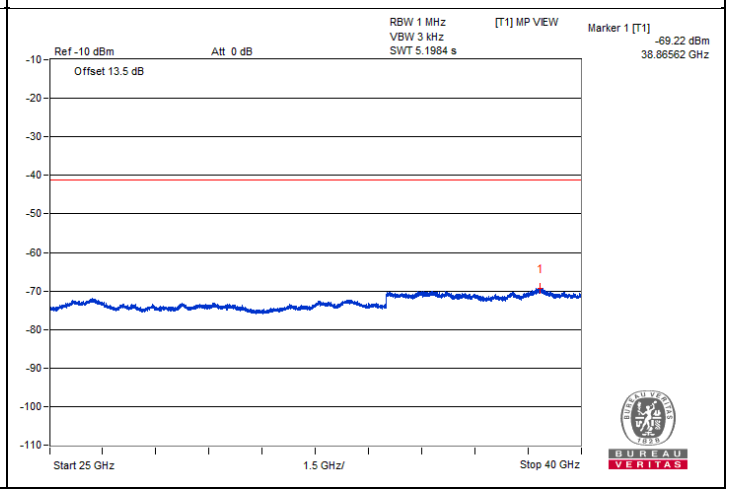
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.22 dBm
38.86562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11be (RU26+106) - Channel 233

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14246.06	45.31 PK	88.2	-42.89	-54.71	4.76	-49.95
2	#14225.93	34.42 AV	68.2	-33.78	-65.6	4.76	-60.84
3	21345.87	45.43 PK	74	-28.57	-54.59	4.76	-49.83
4	21341.56	35.57 AV	54	-18.43	-64.45	4.76	-59.69

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

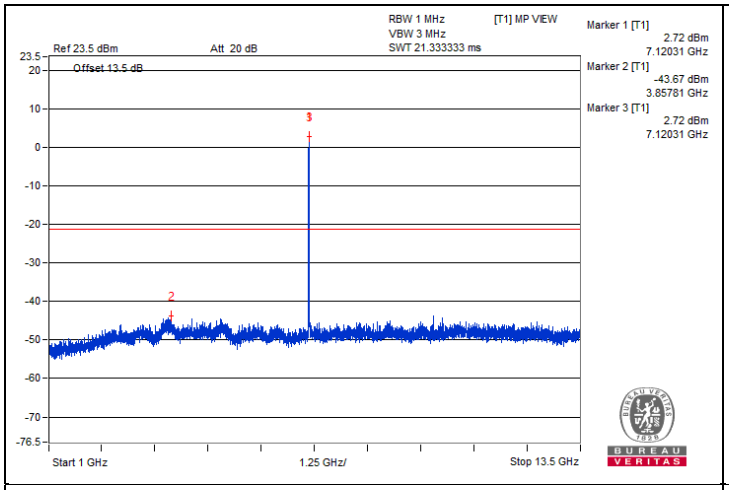
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
2.72 dBm
7.12031 GHz
Marker 2 [T1]
-43.67 dBm
3.85781 GHz
Marker 3 [T1]
2.72 dBm
7.12031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

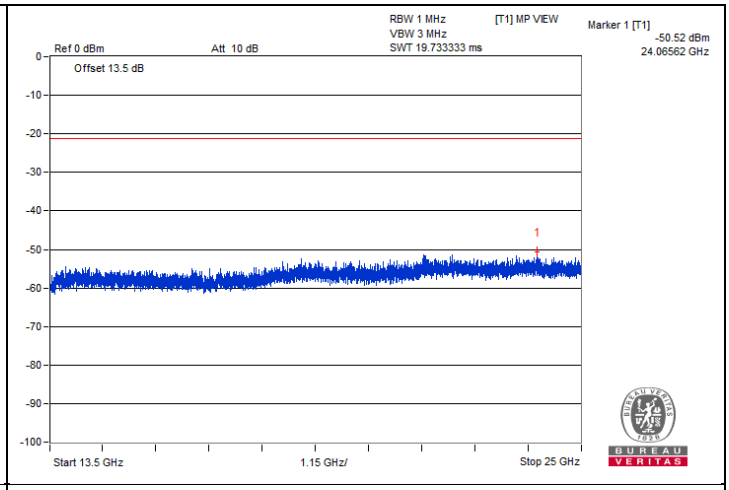
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.52 dBm
24.06562 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

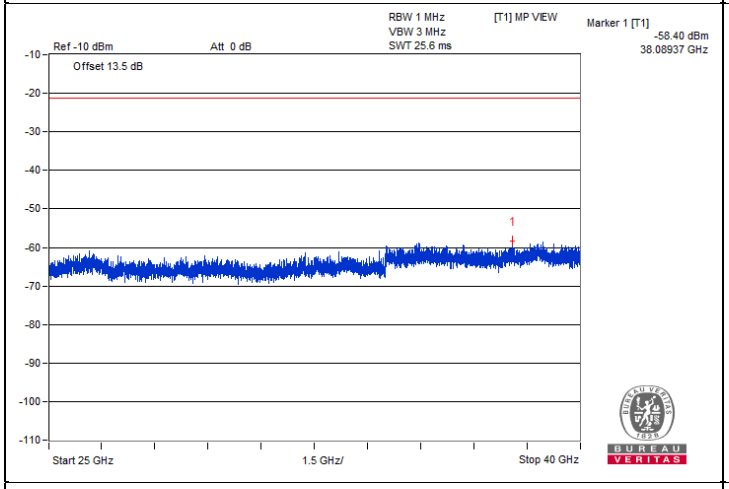
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.40 dBm
38.08937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

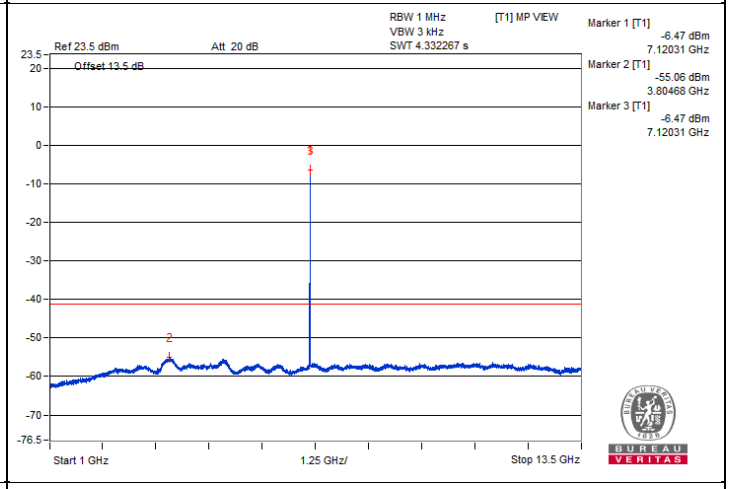
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.47 dBm
7.12031 GHz
Marker 2 [T1]
-55.06 dBm
3.80468 GHz
Marker 3 [T1]
-6.47 dBm
7.12031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

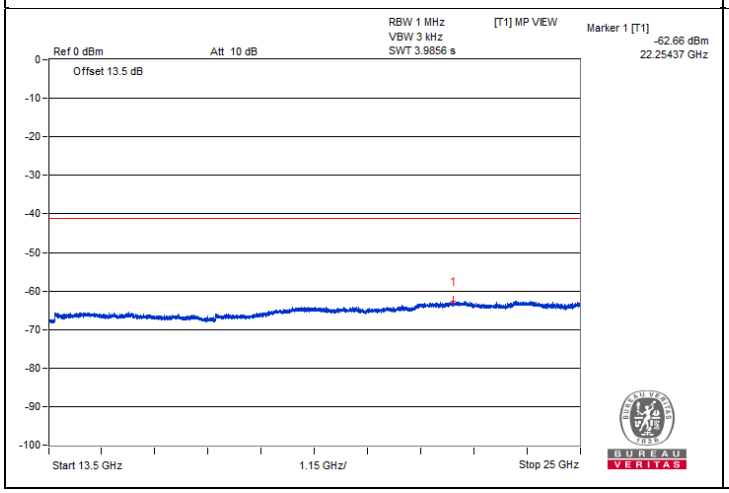
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.66 dBm
22.25437 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

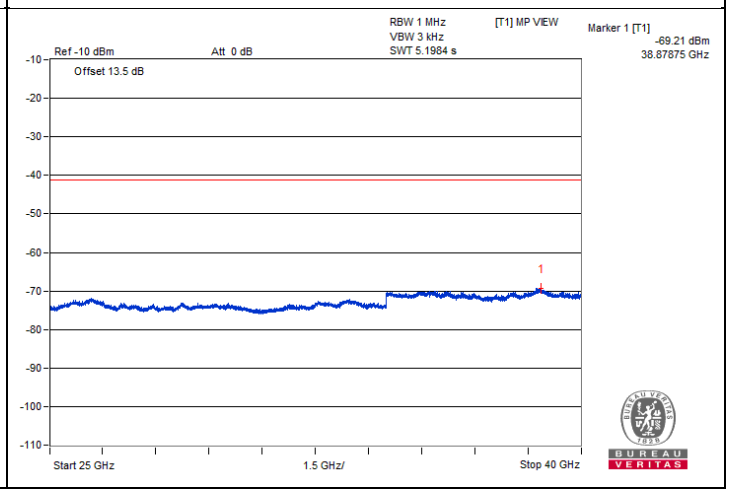
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.21 dBm
38.87875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	62.45 PK	88.2	-25.75	-36.9	4.09	-32.81
2	#7125	44.44 AV	68.2	-23.76	-54.91	4.09	-50.82

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

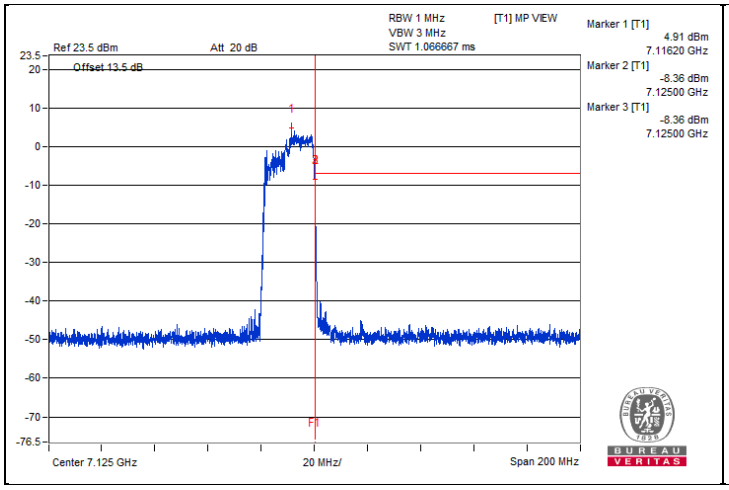

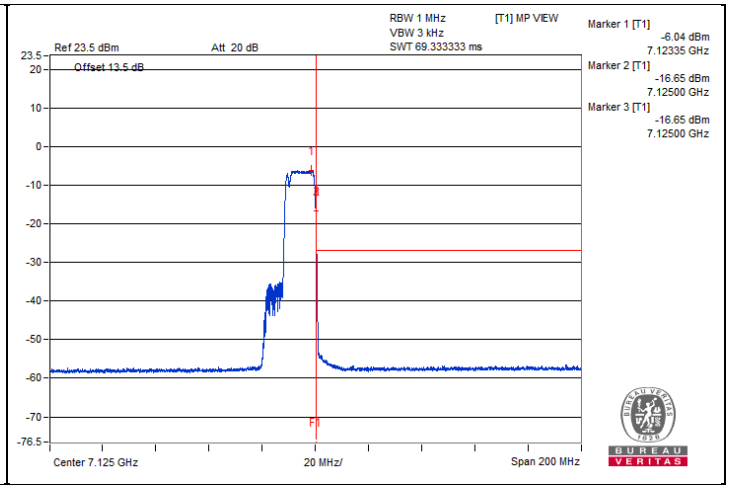

80 MHz Preamble 802.11be (RU484+242) - Channel 7

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	11973.43	52 PK	74	-22	-48.02	4.76	-43.26
2	11968.75	42.66 AV	54	-11.34	-57.36	4.76	-52.60
3	17962	42.65 PK	74	-31.35	-57.37	4.76	-52.61
4	17954.81	33.93 AV	54	-20.07	-66.09	4.76	-61.33

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

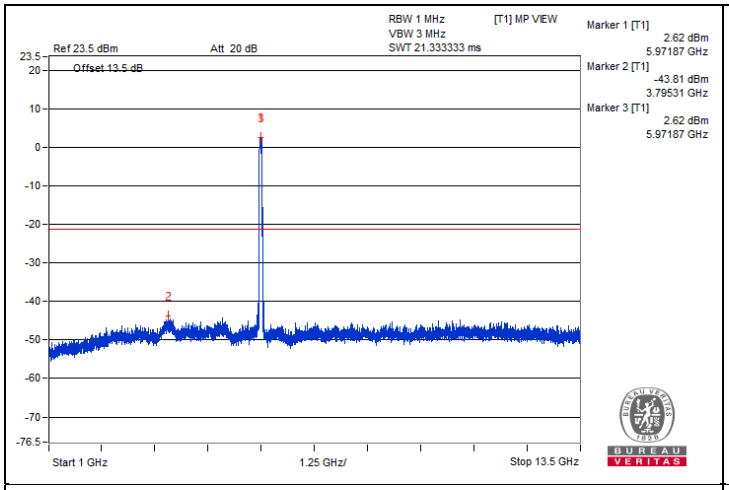
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
2.62 dBm
5.97187 GHz
Marker 2 [T1]
-43.81 dBm
3.79531 GHz
Marker 3 [T1]
2.62 dBm
5.97187 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

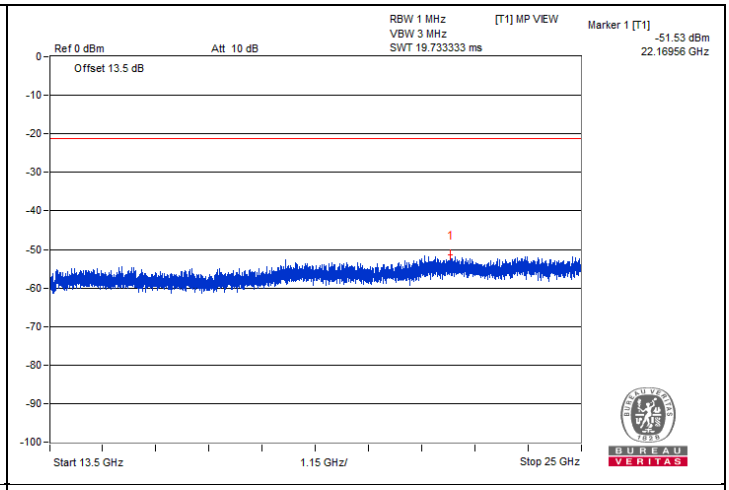
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.53 dBm
22.16956 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

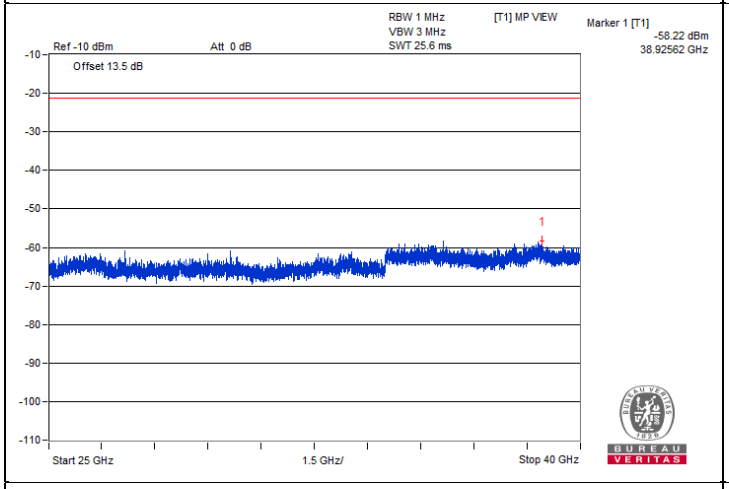
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.22 dBm
38.92562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

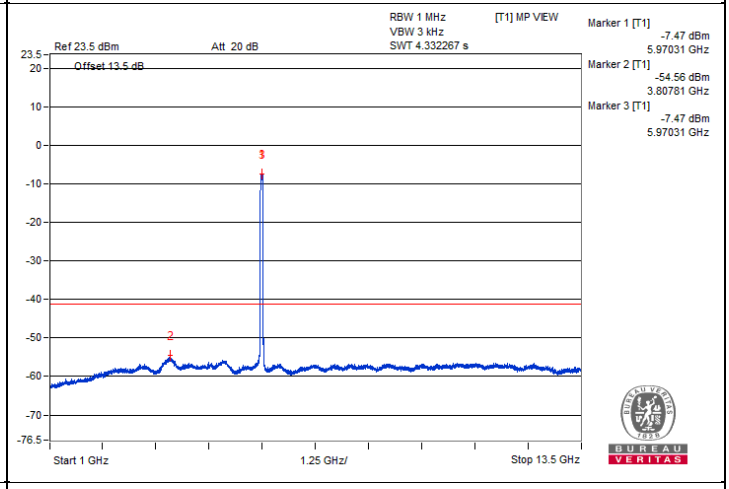
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.47 dBm
5.97031 GHz
Marker 2 [T1]
-54.56 dBm
3.80781 GHz
Marker 3 [T1]
-7.47 dBm
5.97031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

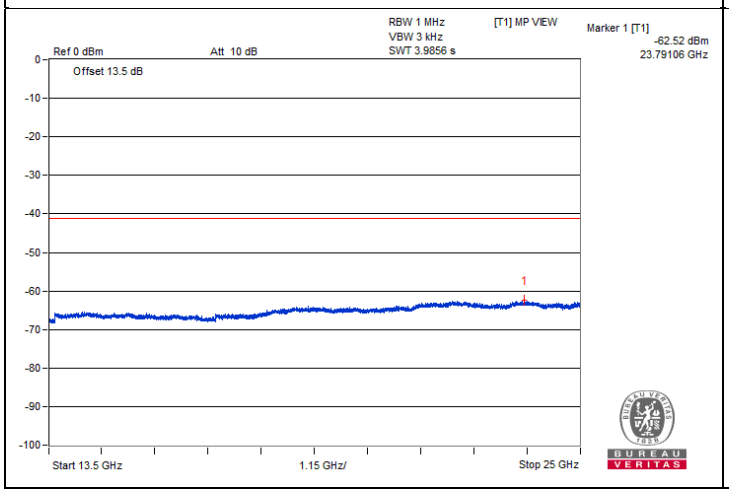
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.52 dBm
23.79106 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

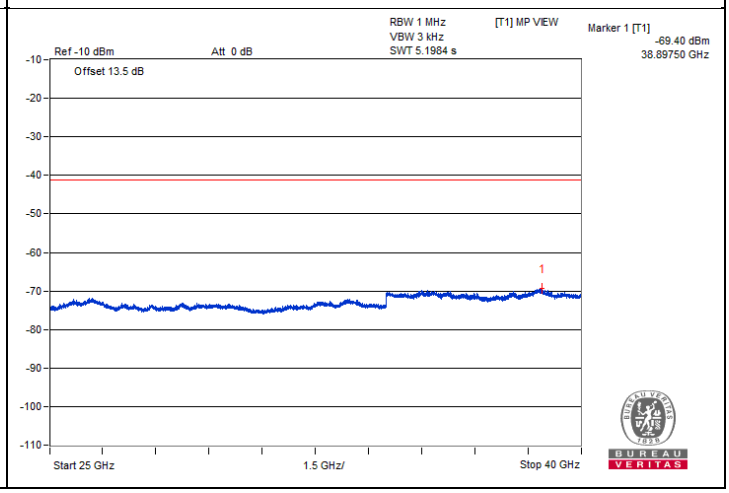
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.40 dBm
38.89750 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5922.97	61.27 PK	88.2	-26.93	-38.75	4.76	-33.99
2	#5924.62	45.8 AV	68.2	-22.4	-54.22	4.76	-49.46

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

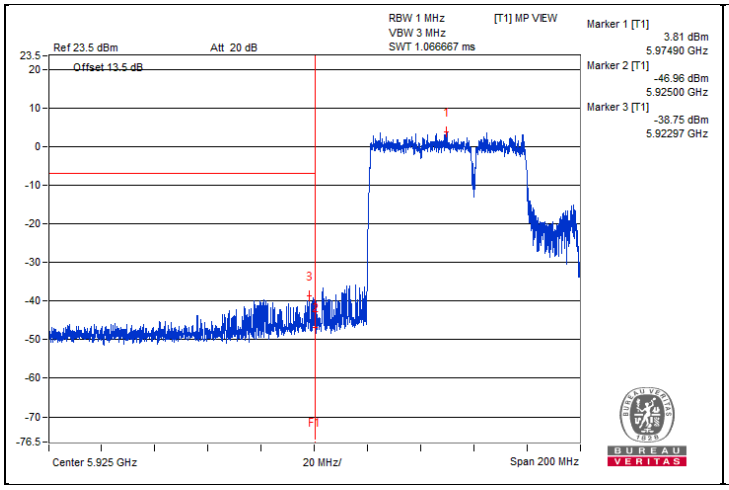

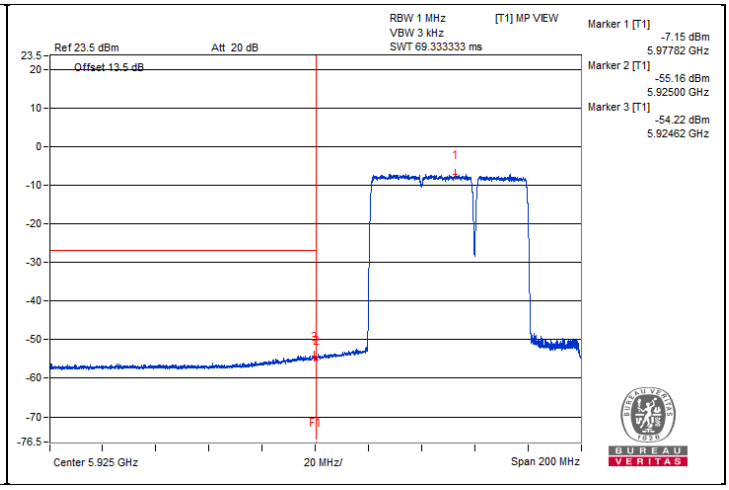

80 MHz Preamble 802.11be (RU484+242) - Channel 87

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12764.06	52.93 PK	88.2	-35.27	-47.09	4.76	-42.33
2	#12760.93	42.46 AV	68.2	-25.74	-57.56	4.76	-52.80
3	19150.81	45.29 PK	74	-28.71	-54.73	4.76	-49.97
4	19152.25	35.55 AV	54	-18.45	-64.47	4.76	-59.71

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

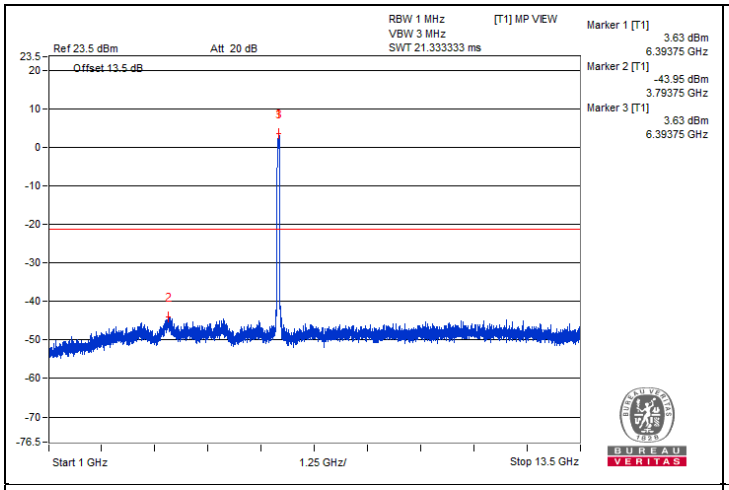
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.63 dBm
6.39375 GHz
Marker 2 [T1]
-43.95 dBm
3.79375 GHz
Marker 3 [T1]
3.63 dBm
6.39375 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

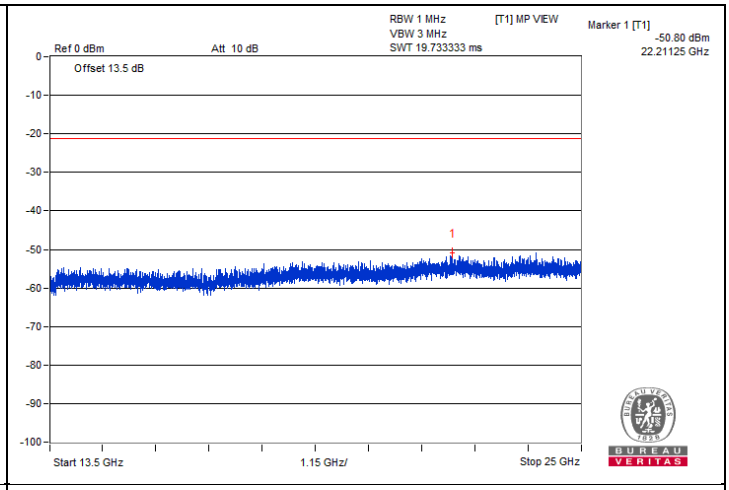
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.80 dBm
22.21125 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

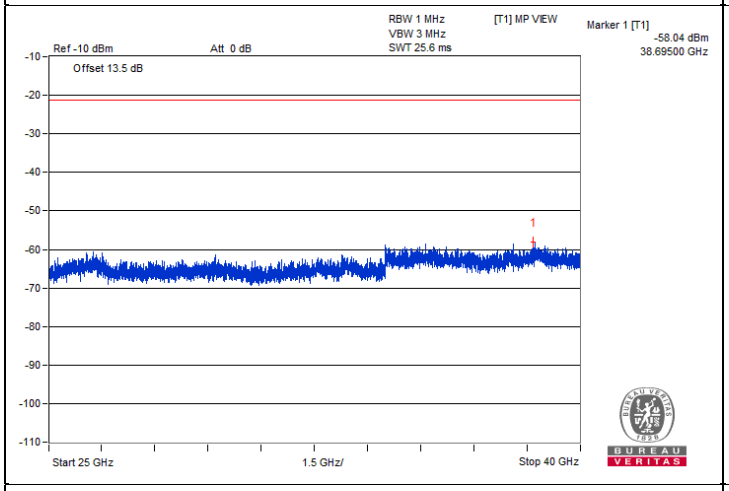
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.04 dBm
38.69500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

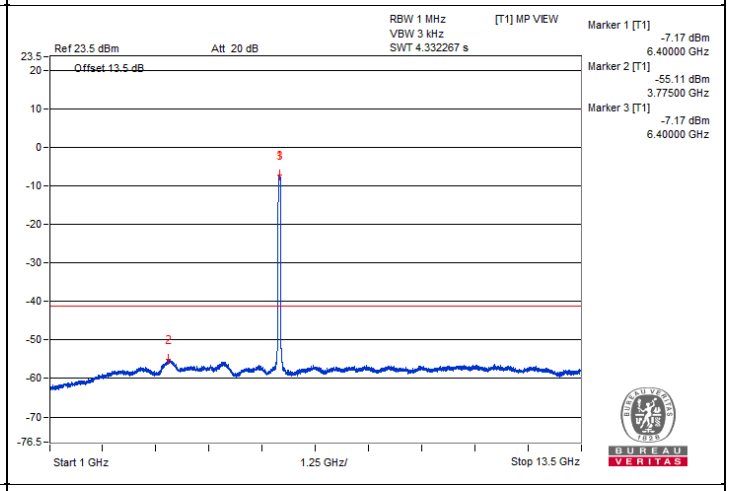
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.17 dBm
6.40000 GHz
Marker 2 [T1]
-55.11 dBm
3.77500 GHz
Marker 3 [T1]
-7.17 dBm
6.40000 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

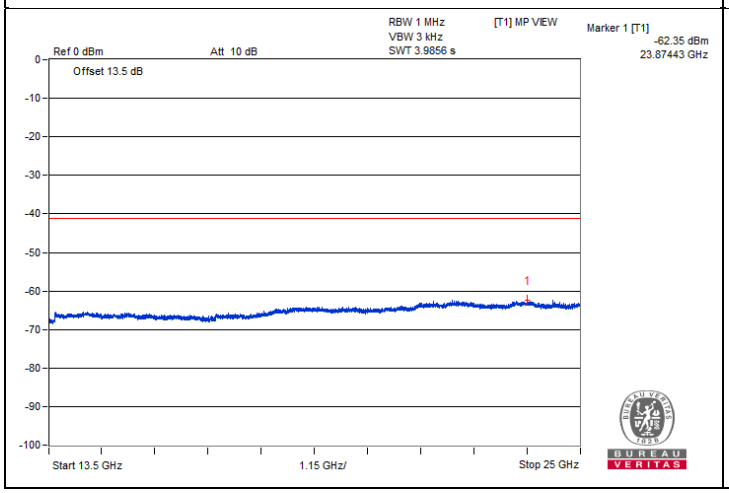
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.35 dBm
23.87443 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

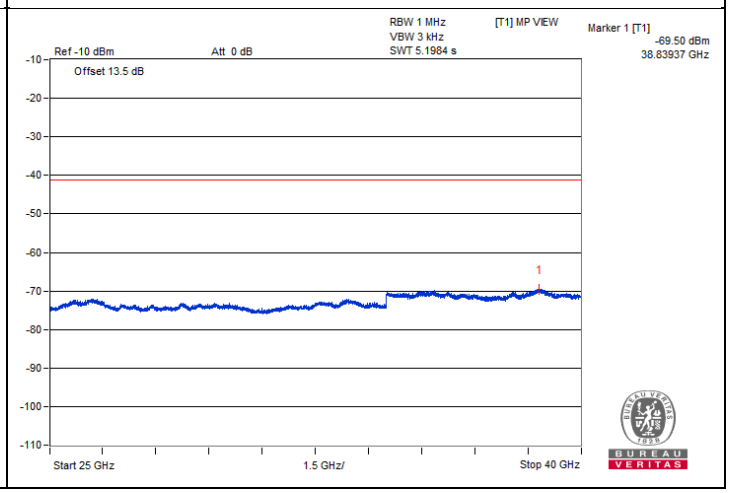
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.50 dBm
38.83937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

80 MHz Preamble 802.11be (RU484+242) - Channel 103

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#12928.12	52.12 PK	88.2	-36.08	-47.9	4.76	-43.14
2	#12931.25	41.51 AV	68.2	-26.69	-58.51	4.76	-53.75
3	19395.18	45.5 PK	74	-28.5	-54.52	4.76	-49.76
4	19392.31	35.31 AV	54	-18.69	-64.71	4.76	-59.95

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

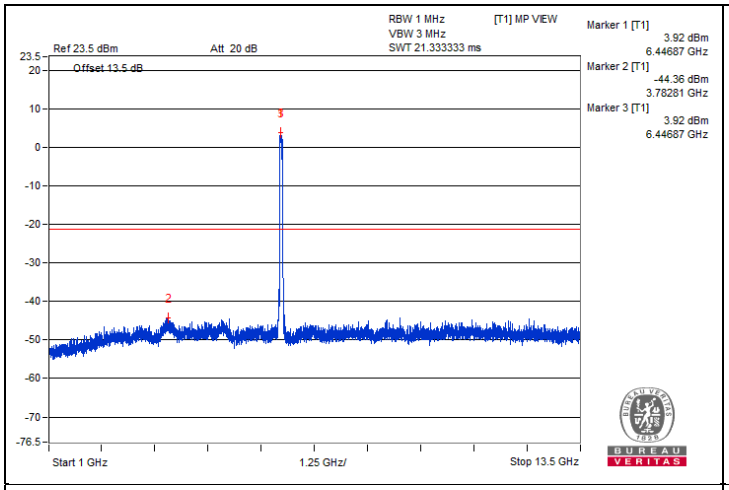
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.92 dBm
6.44687 GHz
Marker 2 [T1]
-44.36 dBm
3.78281 GHz
Marker 3 [T1]
3.92 dBm
6.44687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

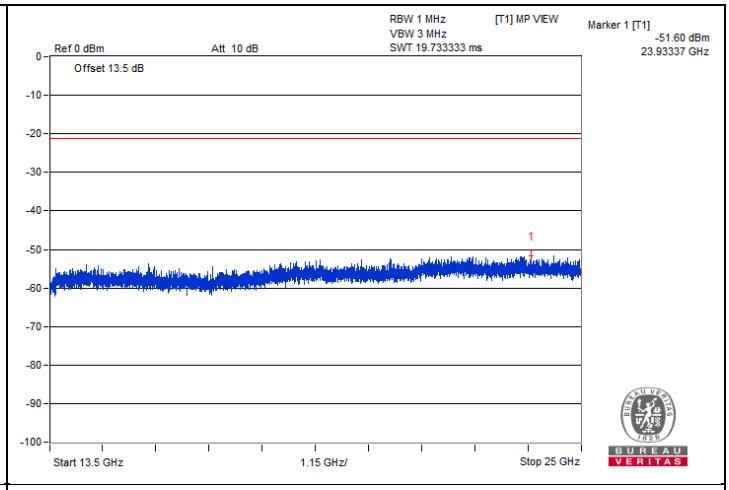
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.60 dBm
23.93337 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

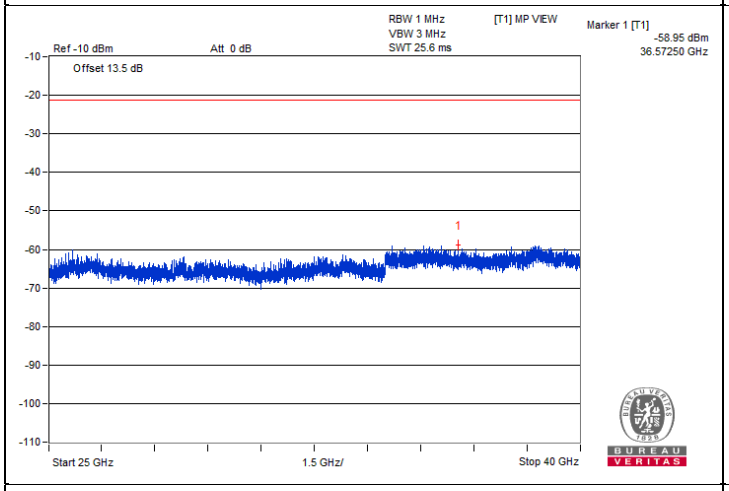
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.95 dBm
36.57250 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

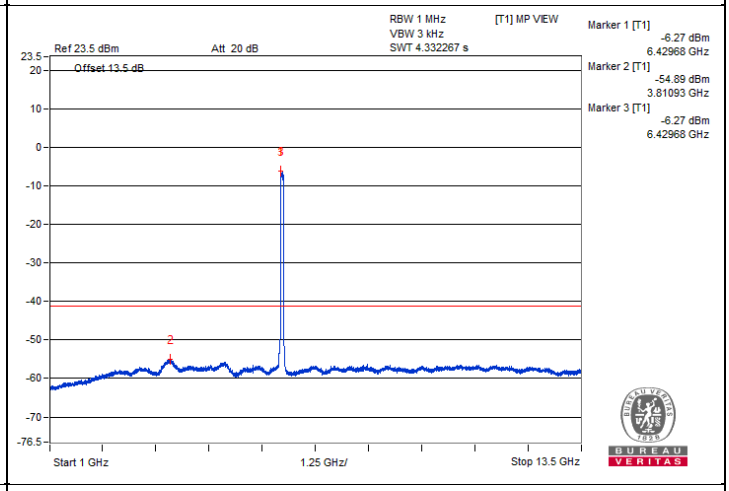
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.27 dBm
6.42968 GHz
Marker 2 [T1]
-54.89 dBm
3.81093 GHz
Marker 3 [T1]
-6.27 dBm
6.42968 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

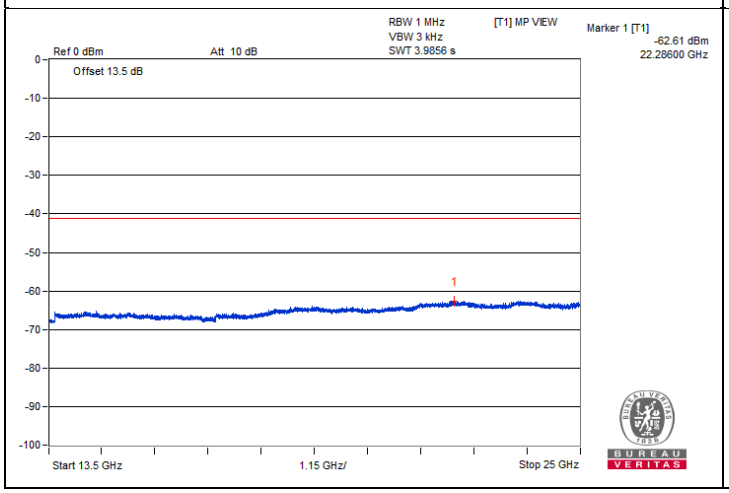
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.61 dBm
22.28600 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

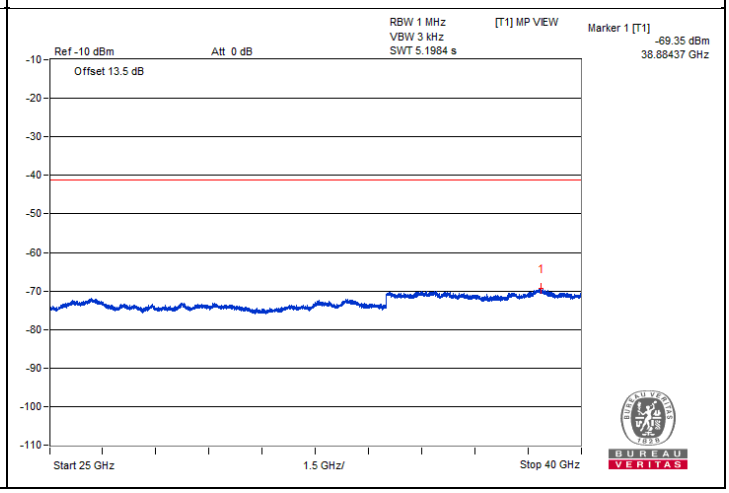
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.35 dBm
38.88437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

80 MHz Preamble 802.11be (RU484+242) - Channel 135

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13254.68	53.6 PK	74	-20.4	-46.42	4.76	-41.66
2	#13248.43	42.23 AV	68.2	-25.97	-57.79	4.76	-53.03
3	19865.25	44.23 PK	74	-29.77	-55.79	4.76	-51.03
4	19871	35.32 AV	54	-18.68	-64.7	4.76	-59.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

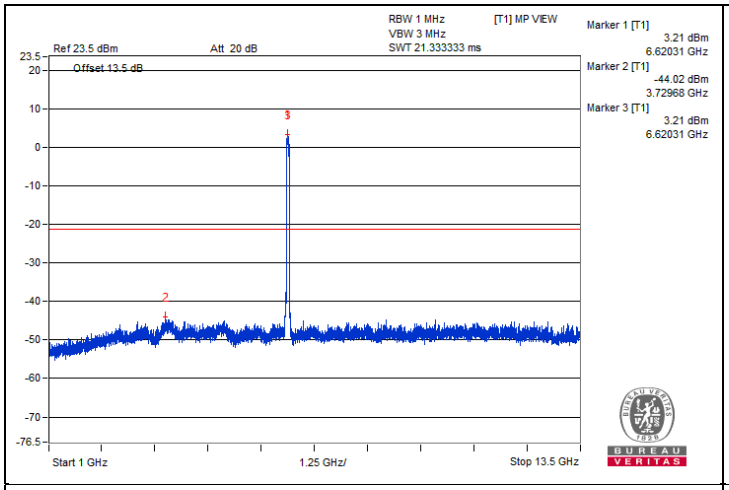
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.21 dBm
6.62031 GHz
Marker 2 [T1]
-44.02 dBm
3.72968 GHz
Marker 3 [T1]
3.21 dBm
6.62031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

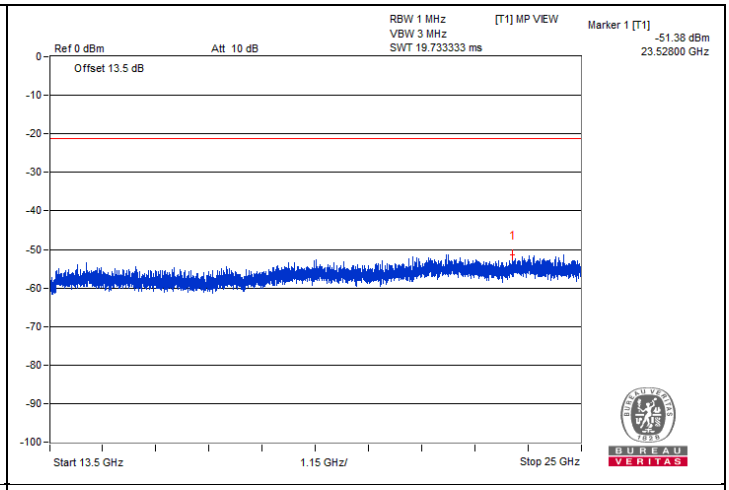
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.38 dBm
23.52800 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

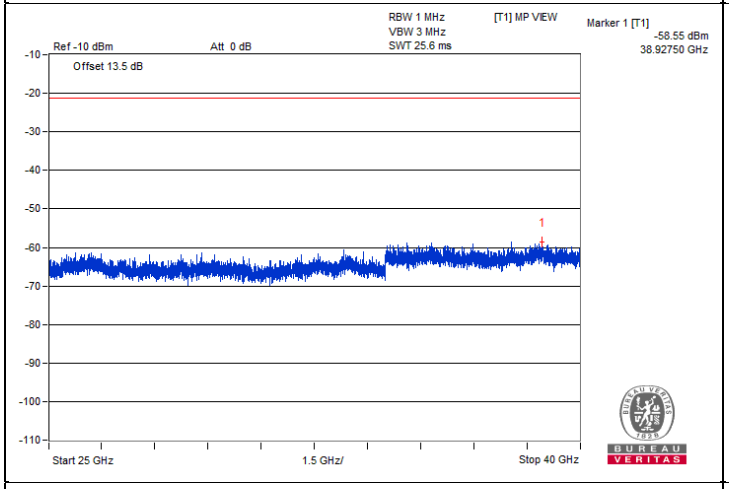
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.55 dBm
38.92750 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

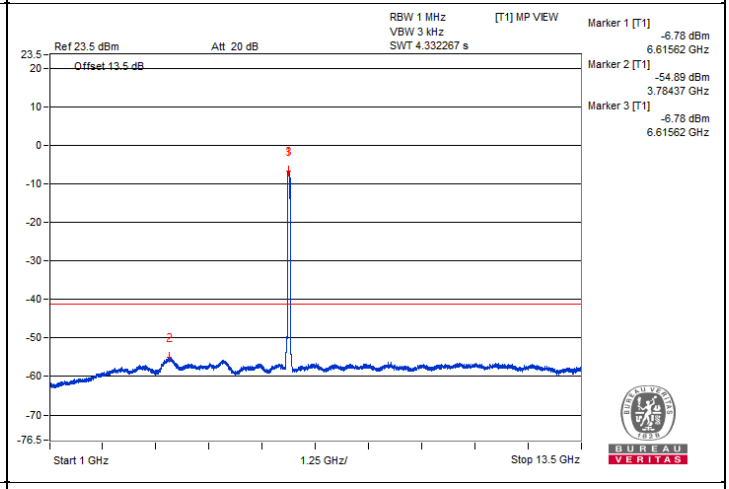
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.78 dBm
6.61562 GHz
Marker 2 [T1]
-54.89 dBm
3.78437 GHz
Marker 3 [T1]
-6.78 dBm
6.61562 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

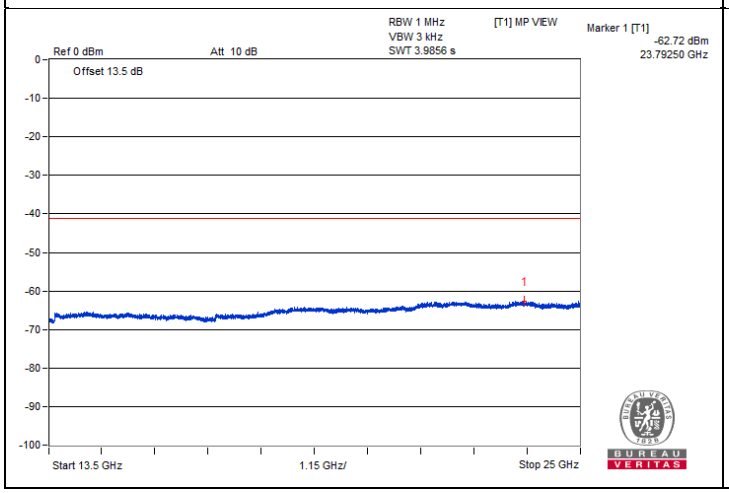
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.72 dBm
23.79250 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

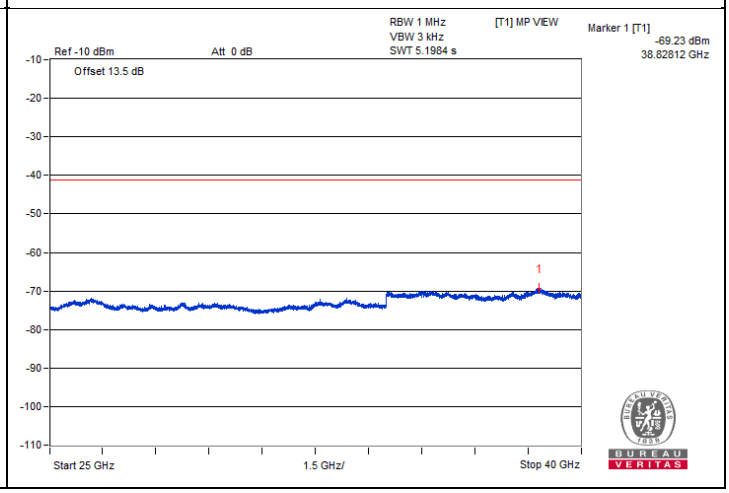
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.23 dBm
38.82812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

80 MHz Preamble 802.11be (RU484+242) - Channel 215

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#14053.43	43.25 PK	88.2	-44.95	-56.77	4.76	-52.01
2	#14044.81	34.03 AV	68.2	-34.17	-65.99	4.76	-61.23
3	21072.75	46.21 PK	74	-27.79	-53.81	4.76	-49.05
4	21075.62	35.71 AV	54	-18.29	-64.31	4.76	-59.55

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

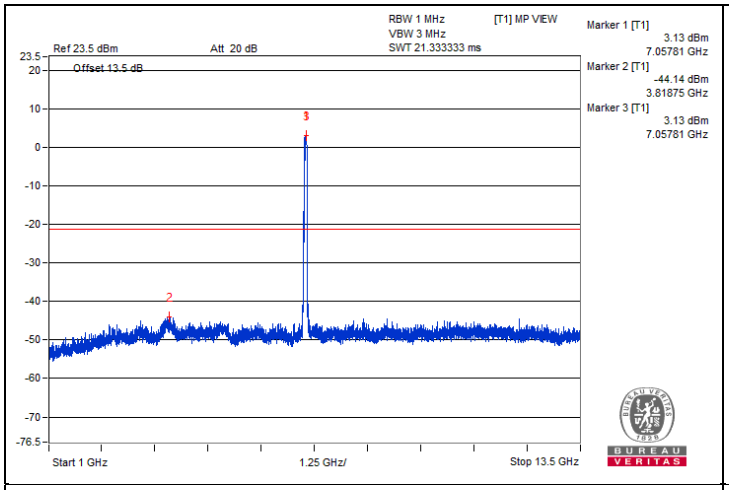
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.13 dBm
7.05781 GHz
Marker 2 [T1]
-44.14 dBm
3.81875 GHz
Marker 3 [T1]
3.13 dBm
7.05781 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

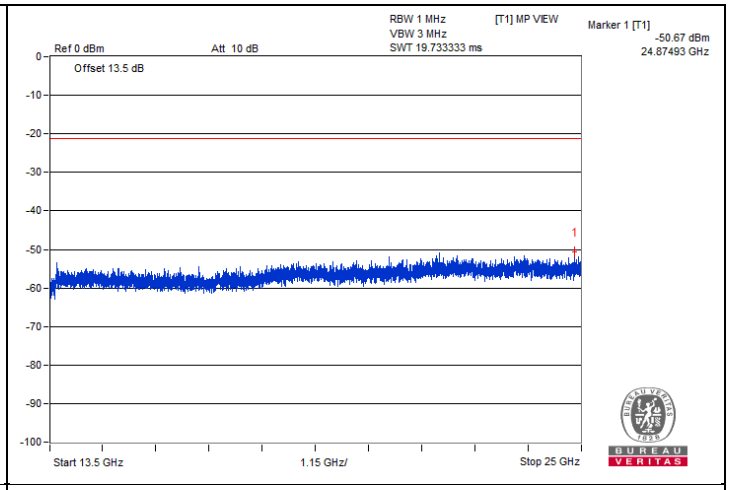
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.67 dBm
24.87493 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

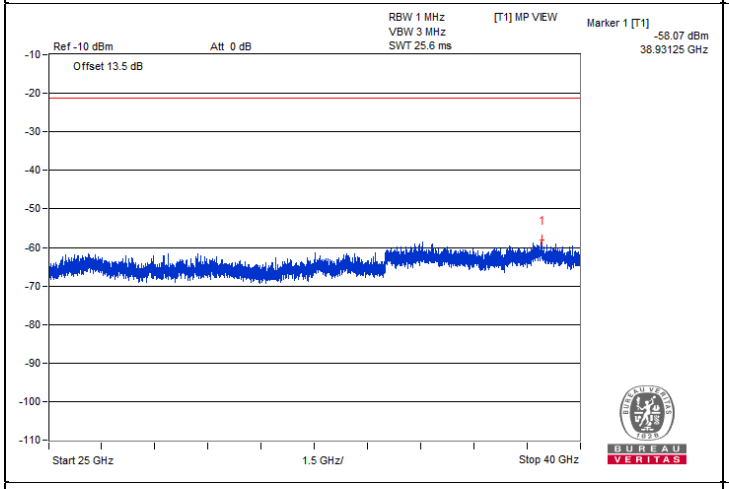
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.07 dBm
38.93125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

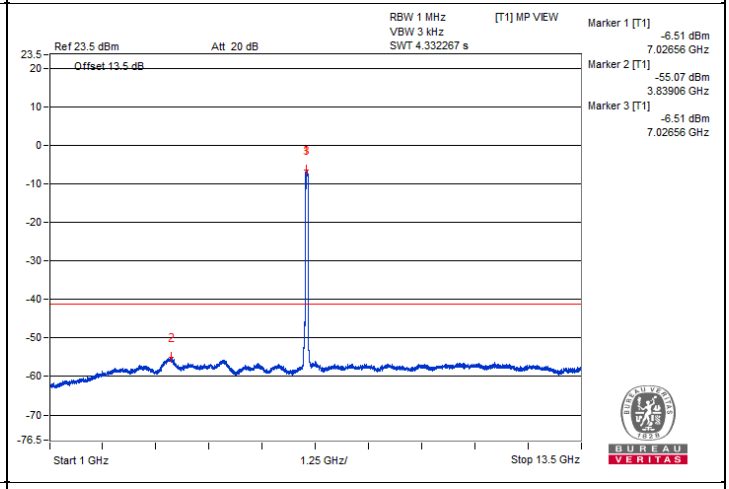
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.51 dBm
7.02656 GHz
Marker 2 [T1]
-55.07 dBm
3.83906 GHz
Marker 3 [T1]
-6.51 dBm
7.02656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

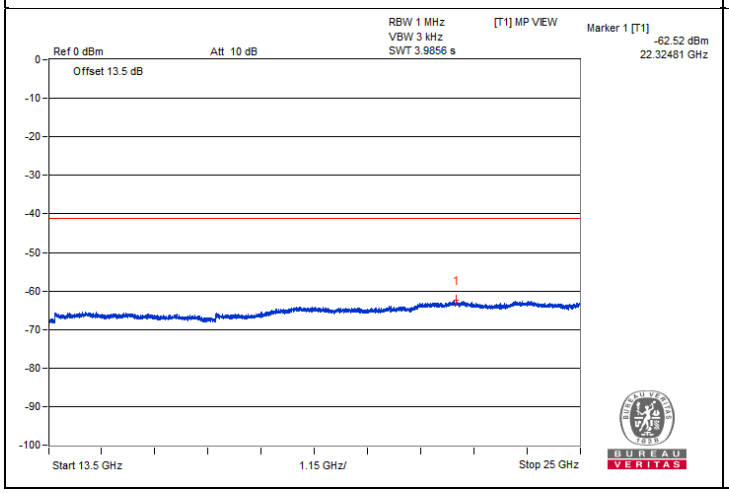
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.52 dBm
22.32481 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

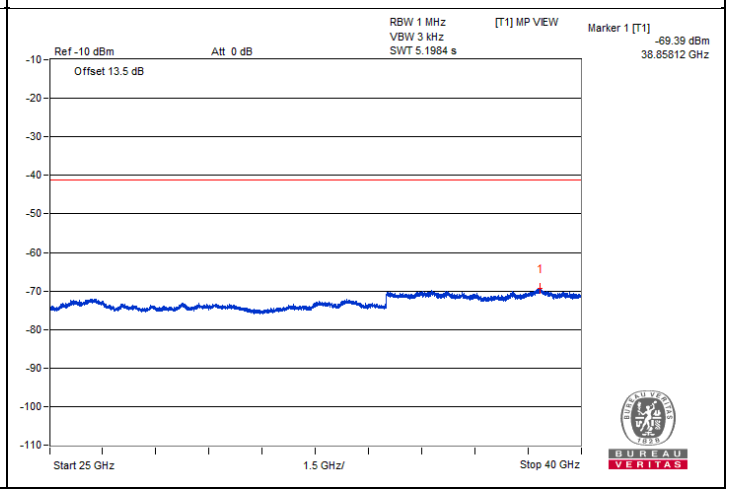
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.39 dBm
38.85812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7165.1	54.37 PK	88.2	-33.83	-44.98	4.09	-40.89
2	#7185.25	42.96 AV	68.2	-25.24	-56.39	4.09	-52.30

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

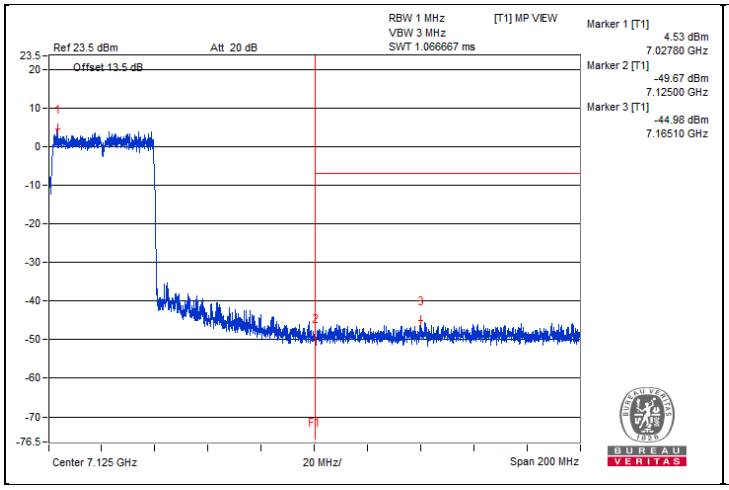

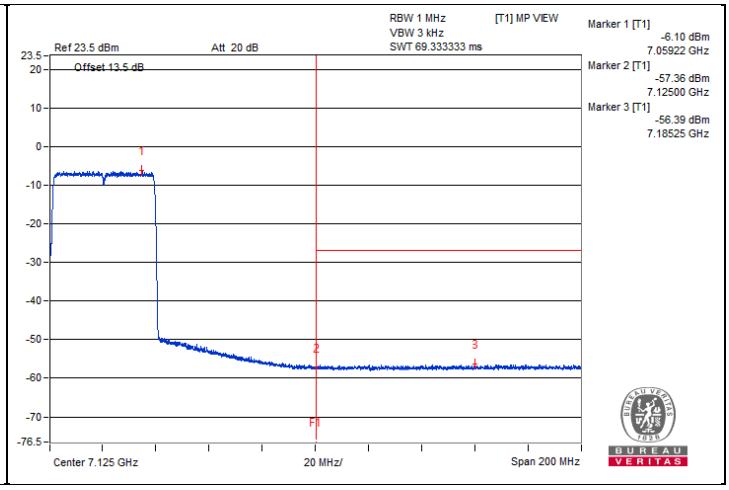

160 MHz Preamble 802.11be (RU996+484) - Channel 15

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12043.75	53.32 PK	74	-20.68	-46.7	4.76	-41.94
2	12043.75	42.05 AV	54	-11.95	-57.97	4.76	-53.21
3	18078.43	44.65 PK	74	-29.35	-55.37	4.76	-50.61
4	18075.56	34.29 AV	54	-19.71	-65.73	4.76	-60.97

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

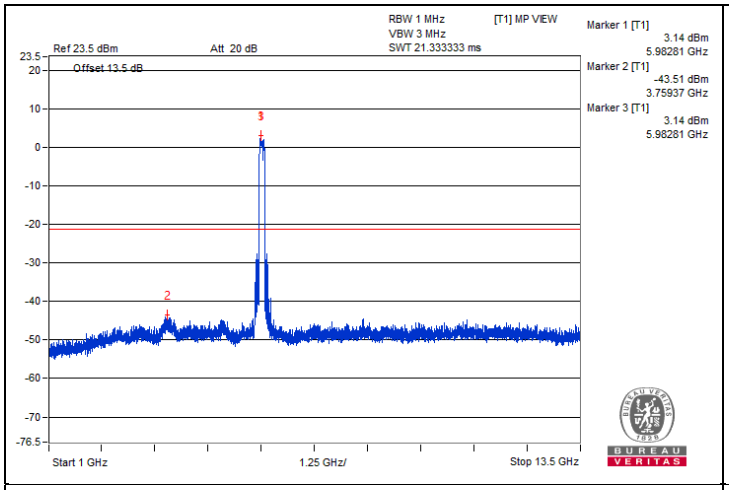
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.14 dBm
5.98281 GHz
Marker 2 [T1]
-43.51 dBm
3.75937 GHz
Marker 3 [T1]
3.14 dBm
5.98281 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

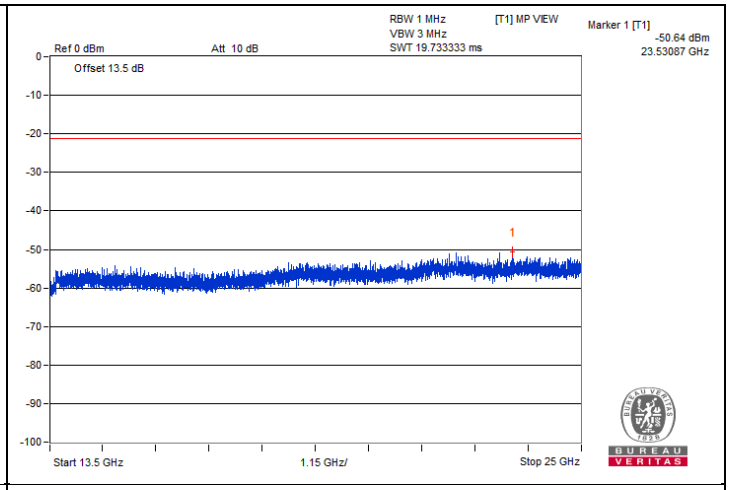
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.64 dBm
23.53087 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

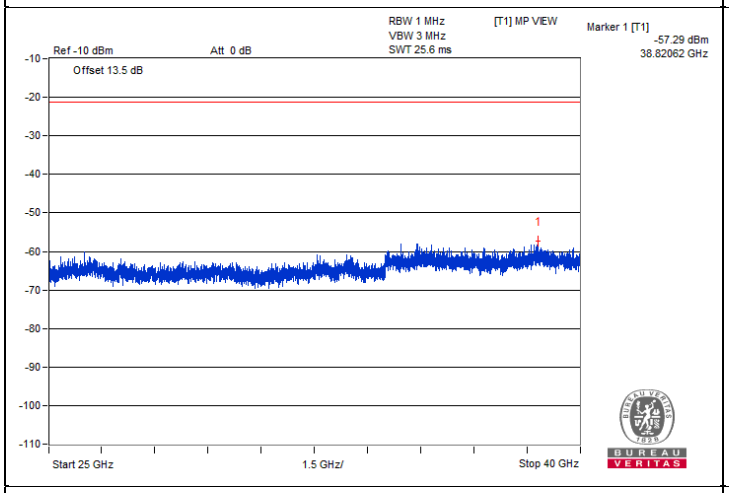
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.29 dBm
38.82062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

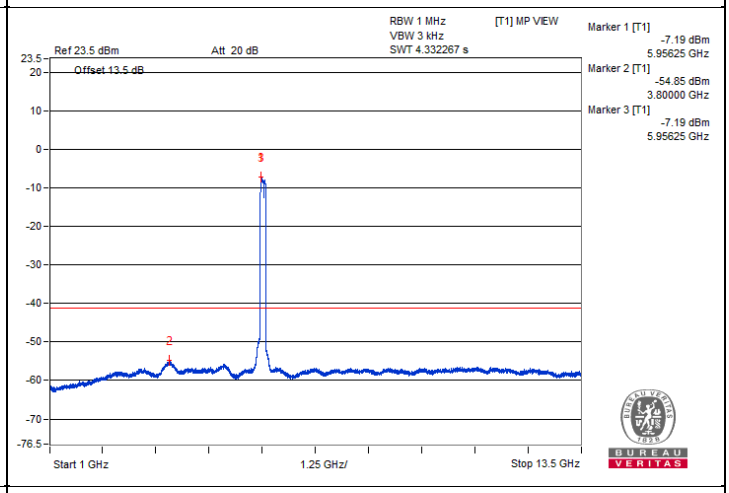
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.19 dBm
5.95625 GHz
Marker 2 [T1]
-54.85 dBm
3.80000 GHz
Marker 3 [T1]
-7.19 dBm
5.95625 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

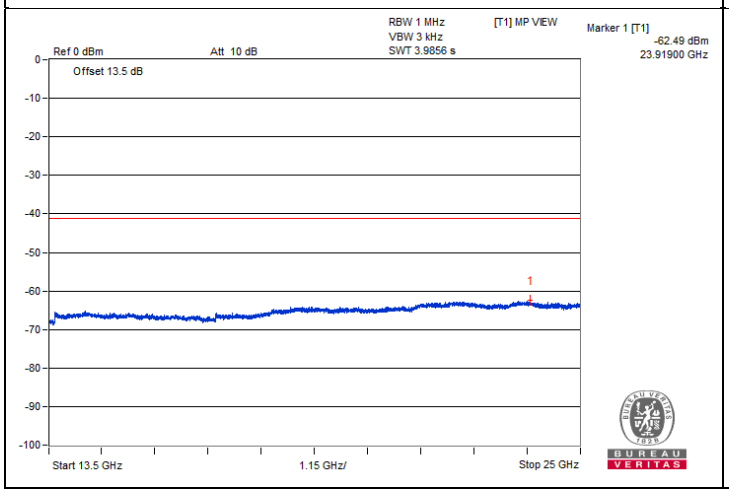
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.49 dBm
23.91900 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

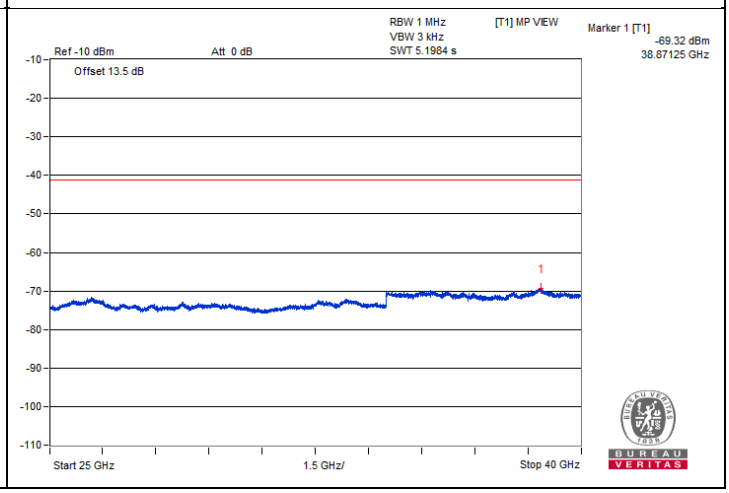
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.32 dBm
38.87125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.62	73.44 PK	88.2	-14.76	-26.58	4.76	-21.82
2	#5923.12	51.1 AV	68.2	-17.1	-48.92	4.76	-44.16

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

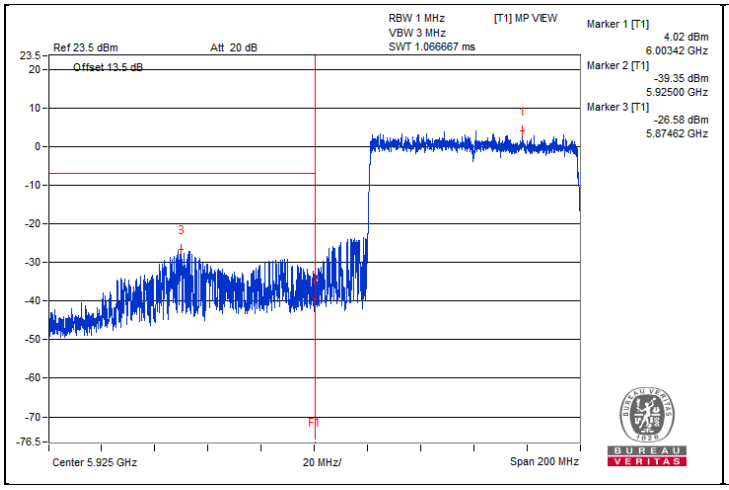

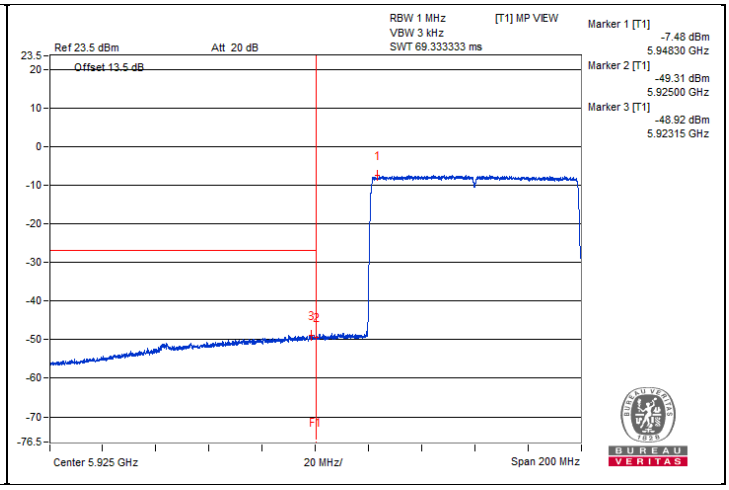

160 MHz Preamble 802.11be (RU996+484) - Channel 79

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12695.31	52.3 PK	74	-21.7	-47.72	4.76	-42.96
2	12685.93	42.45 AV	54	-11.55	-57.57	4.76	-52.81
3	19040.12	45.16 PK	74	-28.84	-54.86	4.76	-50.10
4	19028.62	35.24 AV	54	-18.76	-64.78	4.76	-60.02

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

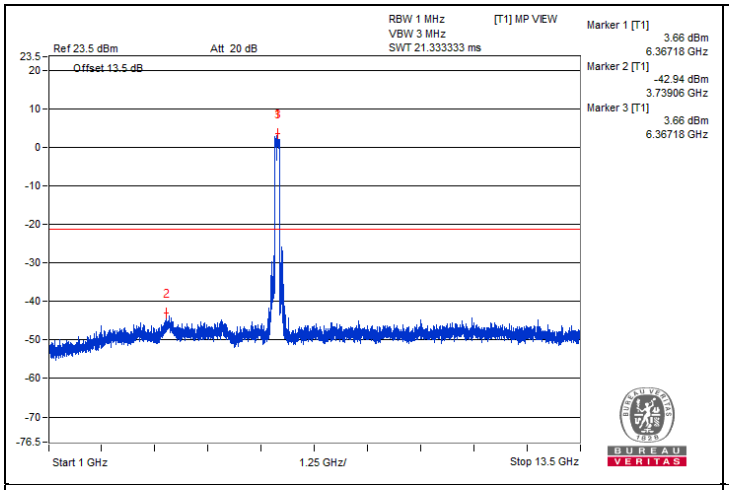
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.66 dBm
6.36718 GHz
Marker 2 [T1]
-42.94 dBm
3.73906 GHz
Marker 3 [T1]
3.66 dBm
6.36718 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

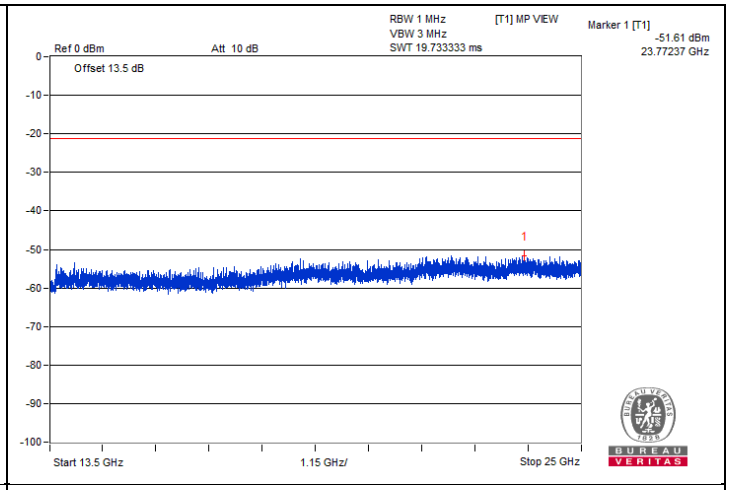
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.61 dBm
23.77237 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

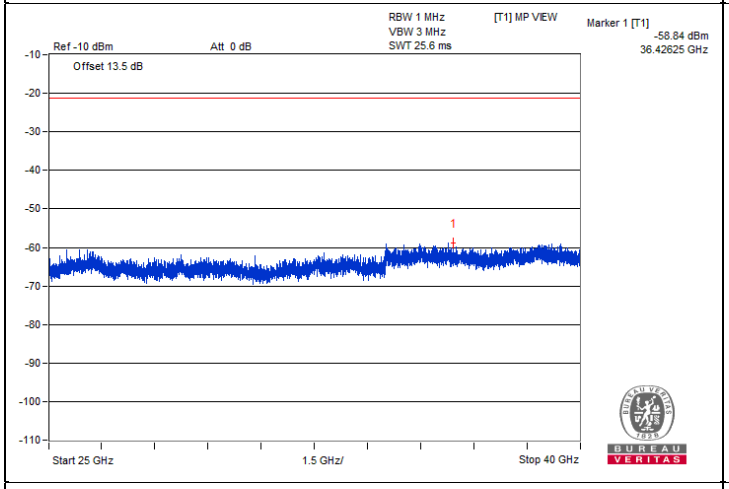
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.84 dBm
36.42625 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

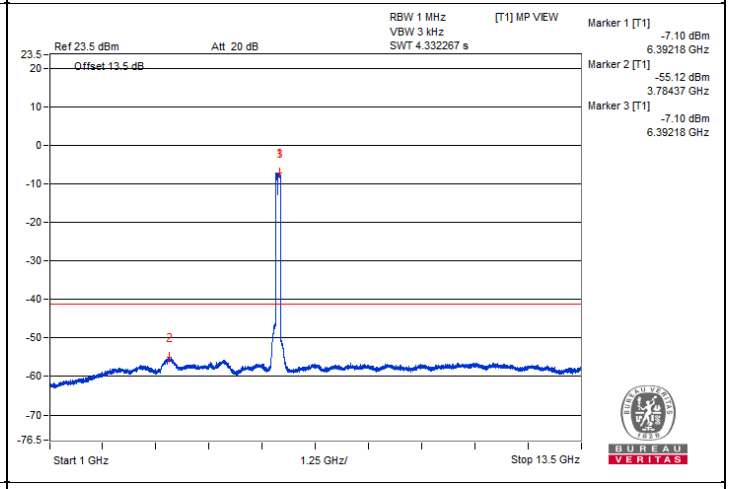
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.10 dBm
6.39218 GHz
Marker 2 [T1]
-55.12 dBm
3.78437 GHz
Marker 3 [T1]
-7.10 dBm
6.39218 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

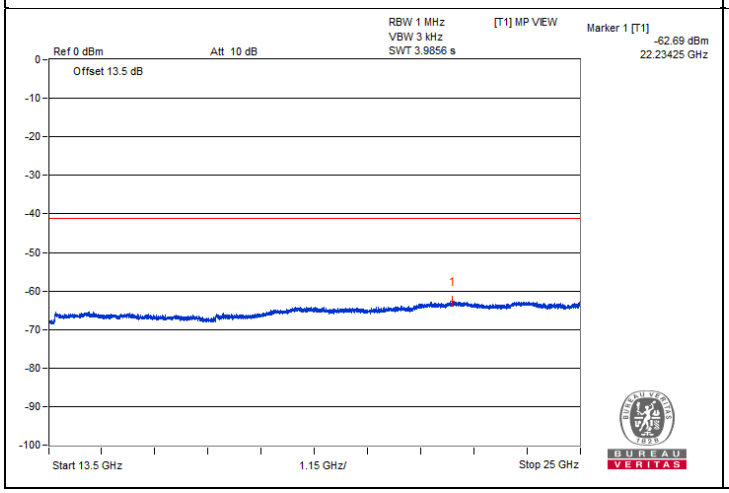
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.69 dBm
22.23425 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

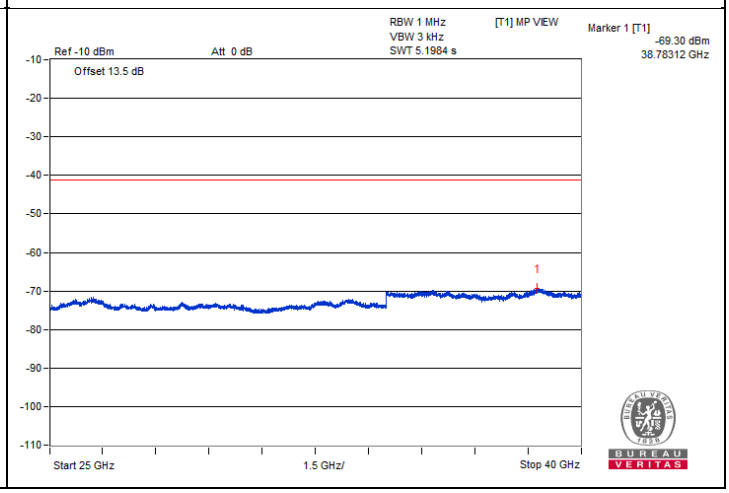
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.30 dBm
38.78312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

160 MHz Preamble 802.11be (RU996+484) - Channel 143

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13320.31	52.58 PK	74	-21.42	-47.44	4.76	-42.68
2	13332.81	42.16 AV	54	-11.84	-57.86	4.76	-53.10
3	19988.87	46.04 PK	74	-27.96	-53.98	4.76	-49.22
4	19997.5	35.14 AV	54	-18.86	-64.88	4.76	-60.12

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

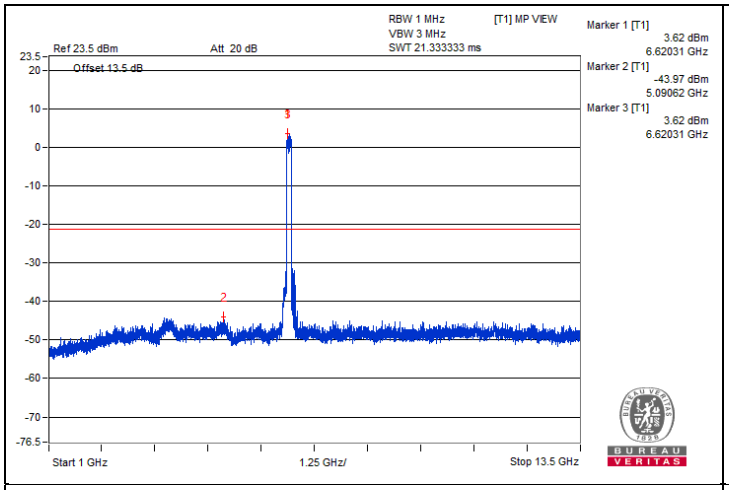
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.62 dBm
6.62031 GHz
Marker 2 [T1]
-43.97 dBm
5.09062 GHz
Marker 3 [T1]
3.62 dBm
6.62031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

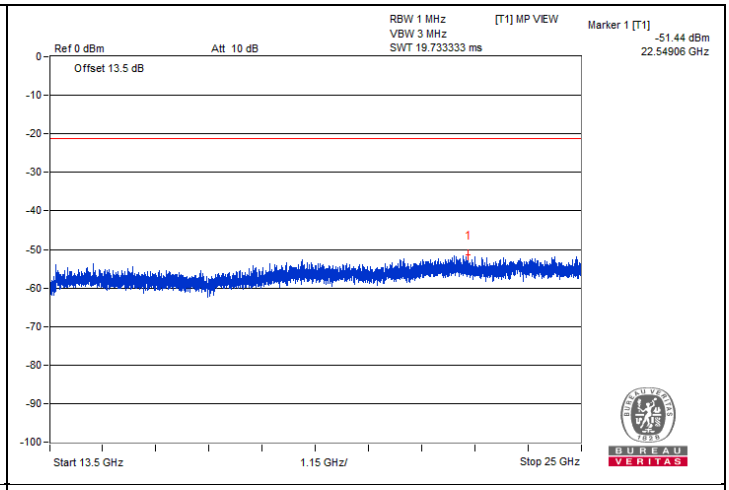
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.44 dBm
22.54906 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

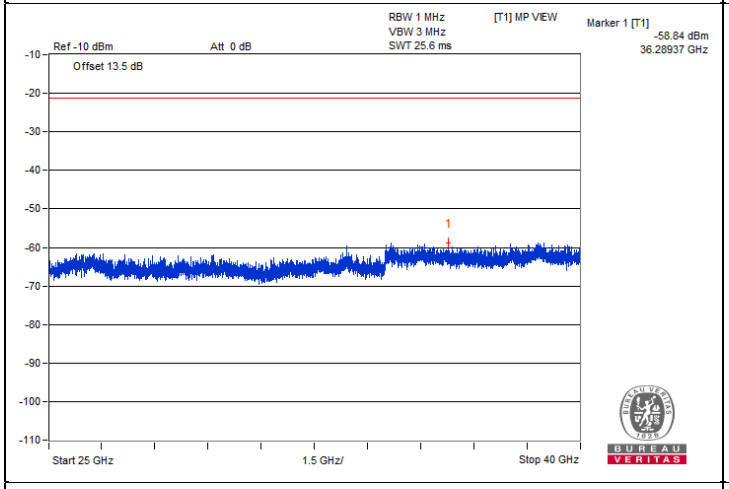
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.84 dBm
36.28937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

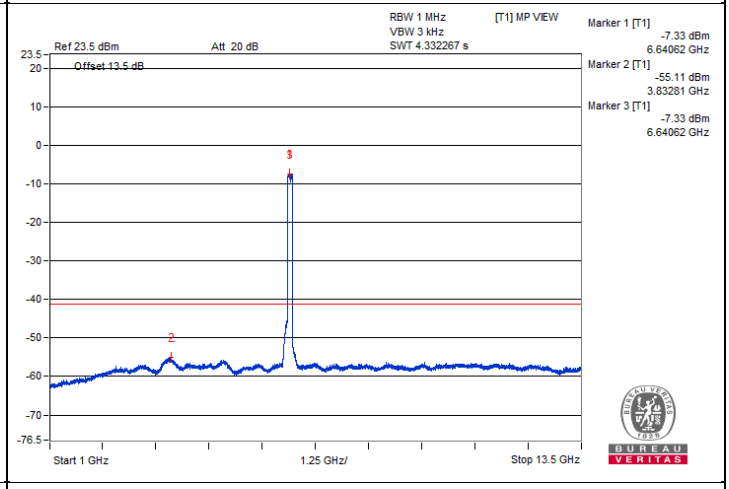
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.33 dBm
6.64062 GHz
Marker 2 [T1]
-55.11 dBm
3.83281 GHz
Marker 3 [T1]
-7.33 dBm
6.64062 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

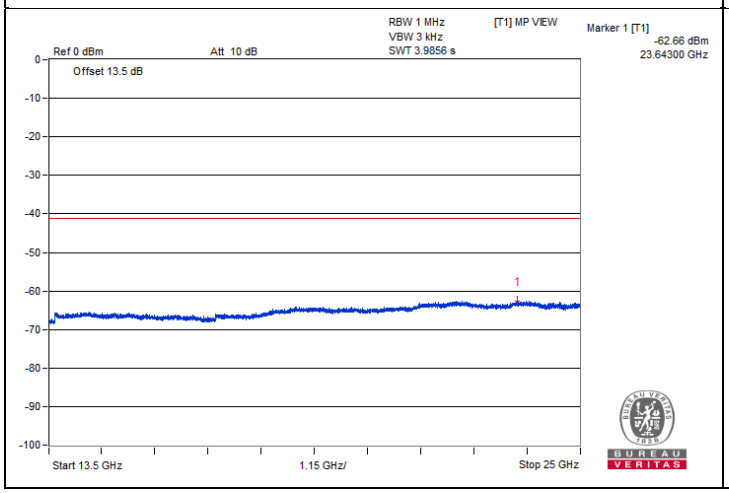
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.66 dBm
23.64300 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

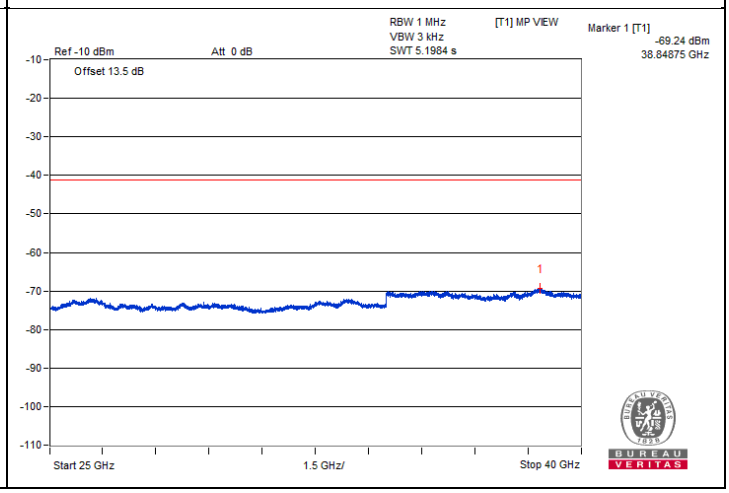
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.24 dBm
38.84875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

160 MHz Preamble 802.11be (RU996+484) - Channel 207

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13975.81	44.59 PK	88.2	-43.61	-55.43	4.76	-50.67
2	#13970.06	33.93 AV	68.2	-34.27	-66.09	4.76	-61.33
3	20963.5	44.38 PK	74	-29.62	-55.64	4.76	-50.88
4	20964.93	35.53 AV	54	-18.47	-64.49	4.76	-59.73

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

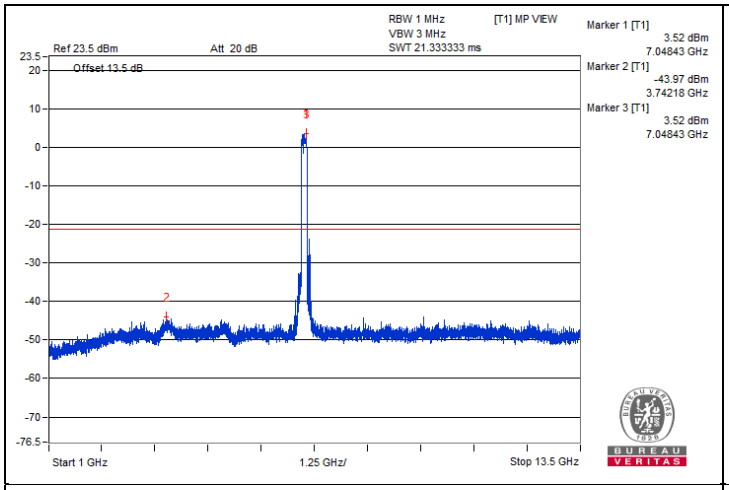
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.52 dBm
7.04843 GHz
Marker 2 [T1]
-43.97 dBm
3.74218 GHz
Marker 3 [T1]
3.52 dBm
7.04843 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

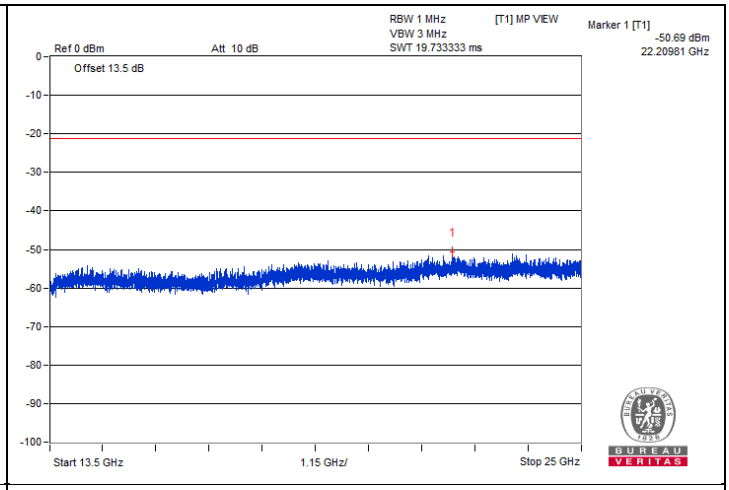
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.69 dBm
22.20981 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

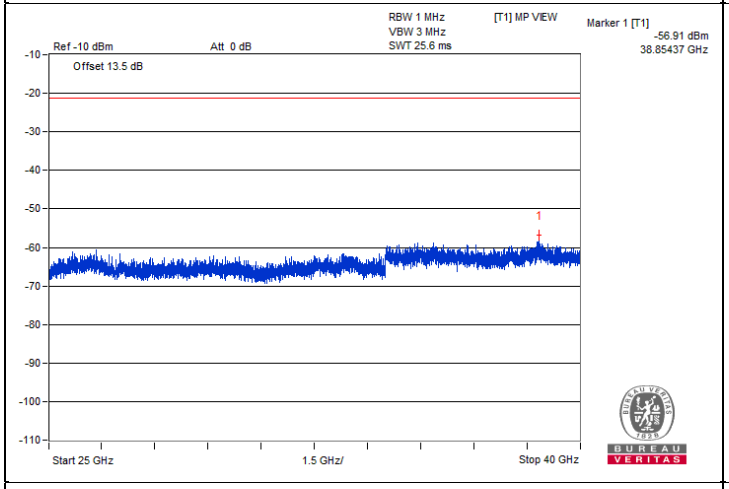
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-56.91 dBm
38.85437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

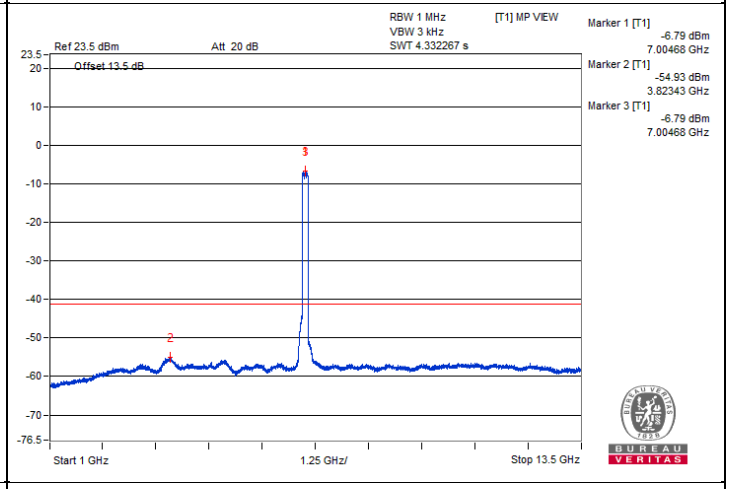
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.79 dBm
7.00468 GHz
Marker 2 [T1]
-54.93 dBm
3.82343 GHz
Marker 3 [T1]
-6.79 dBm
7.00468 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

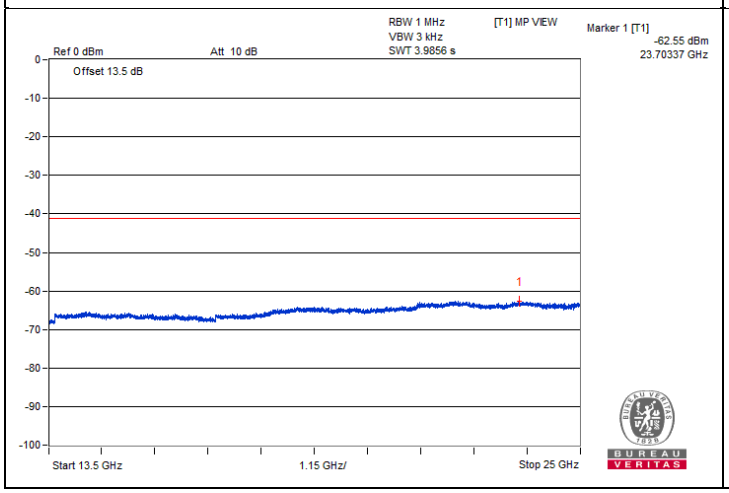
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.55 dBm
23.70337 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

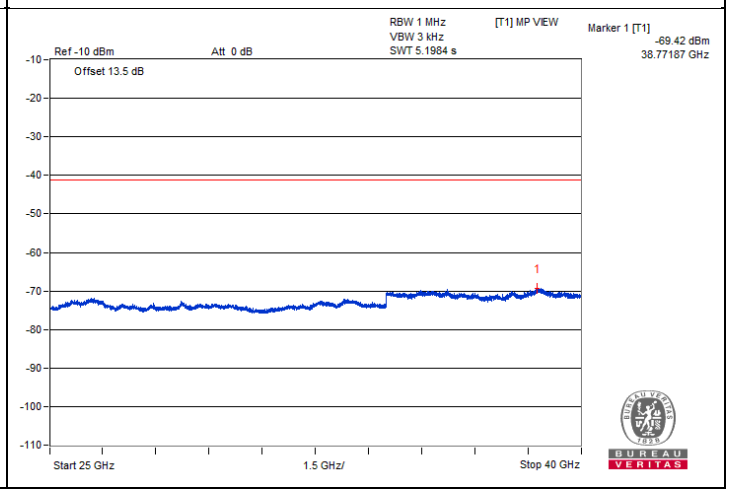
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.42 dBm
38.77187 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125.82	73.9 PK	88.2	-14.3	-25.45	4.09	-21.36
2	#7127.2	48.19 AV	68.2	-20.01	-51.16	4.09	-47.07

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

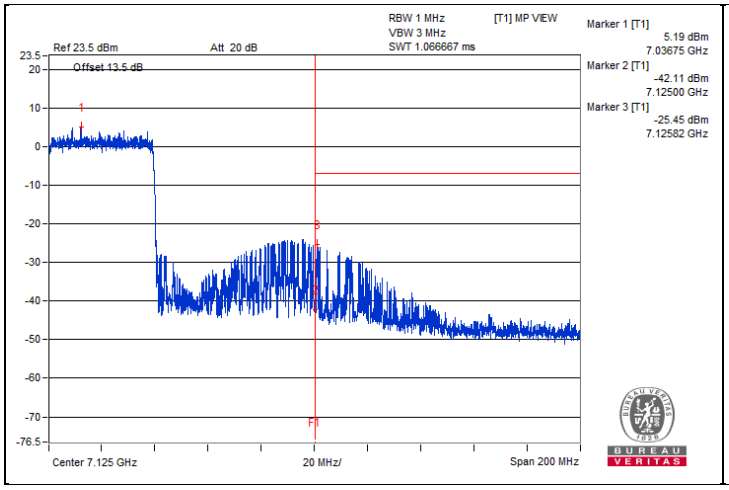

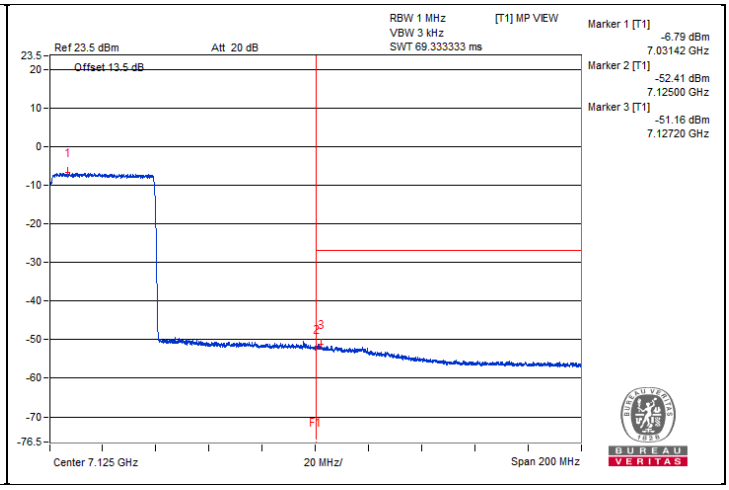

160 MHz Preamble 802.11be (RU996+484+242) - Channel 15

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12048.43	53.36 PK	74	-20.64	-46.66	4.76	-41.90
2	12040.62	42.51 AV	54	-11.49	-57.51	4.76	-52.75
3	18065.5	42.74 PK	74	-31.26	-57.28	4.76	-52.52
4	18068.37	34.28 AV	54	-19.72	-65.74	4.76	-60.98

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

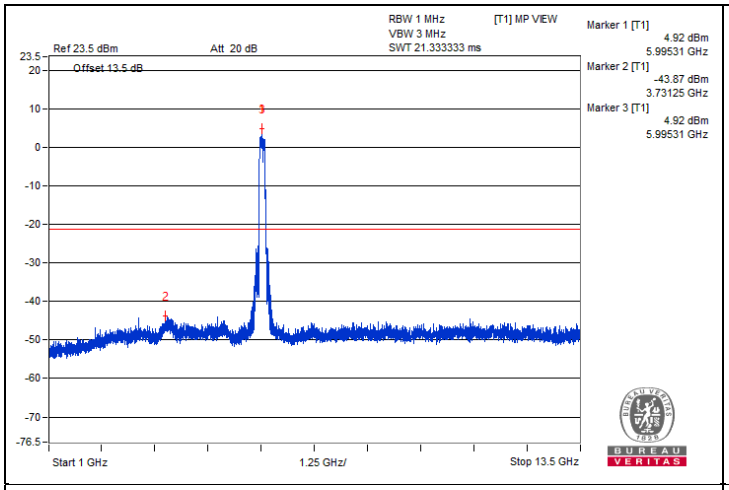
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.92 dBm
5.99531 GHz
Marker 2 [T1]
-43.87 dBm
3.73125 GHz
Marker 3 [T1]
4.92 dBm
5.99531 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

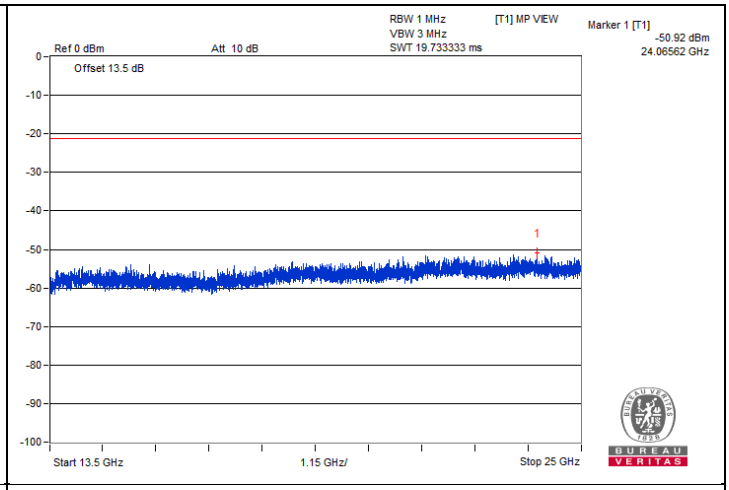
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.92 dBm
24.06562 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

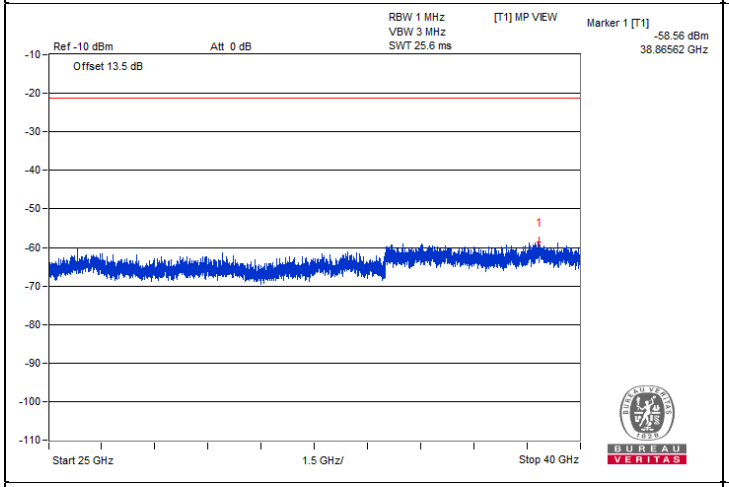
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.56 dBm
38.86562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

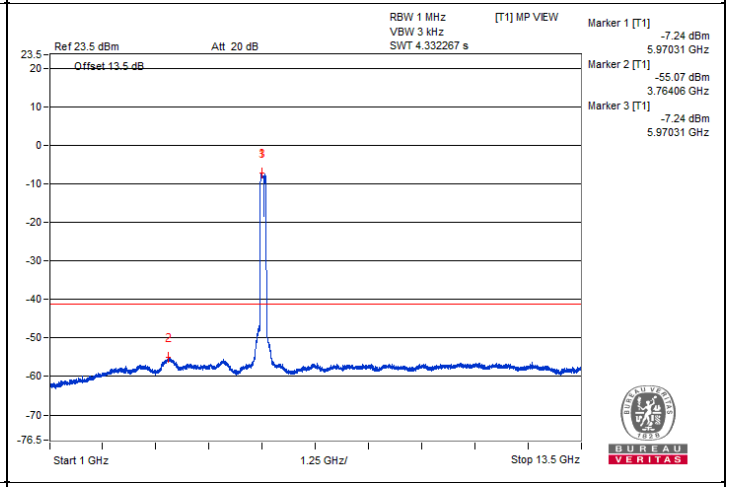
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.24 dBm
5.97031 GHz
Marker 2 [T1]
-55.07 dBm
3.76406 GHz
Marker 3 [T1]
-7.24 dBm
5.97031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

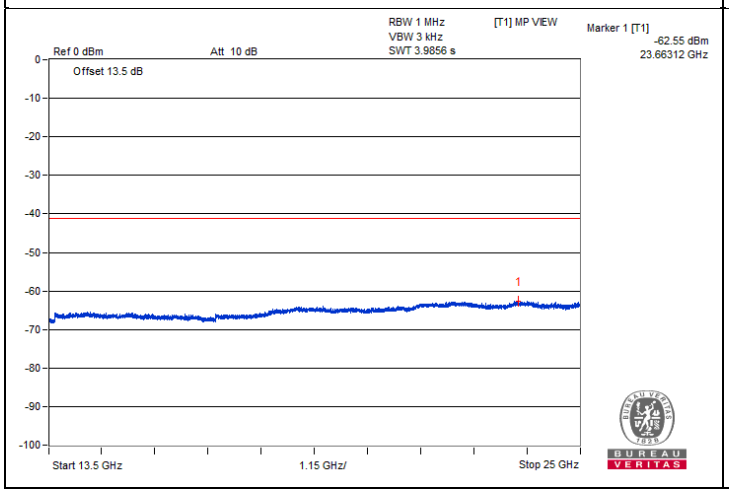
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.55 dBm
23.66312 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

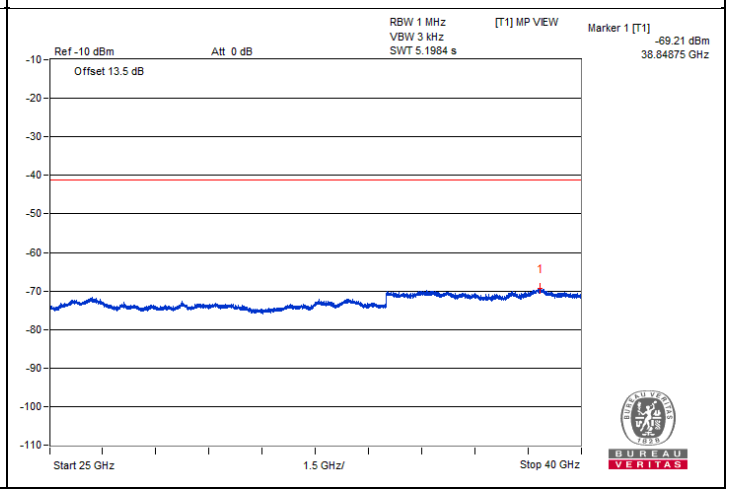
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.21 dBm
38.84875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5917.45	77.46 PK	88.2	-10.74	-22.56	4.76	-17.80
2	#5919.1	53.14 AV	68.2	-15.06	-46.88	4.76	-42.12

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

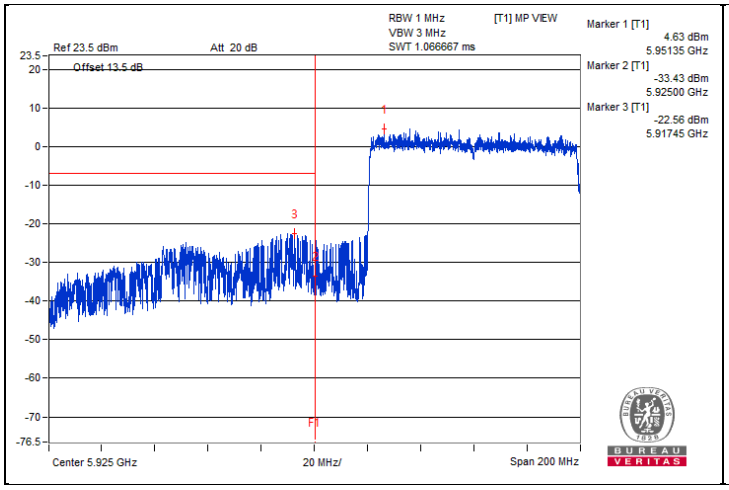

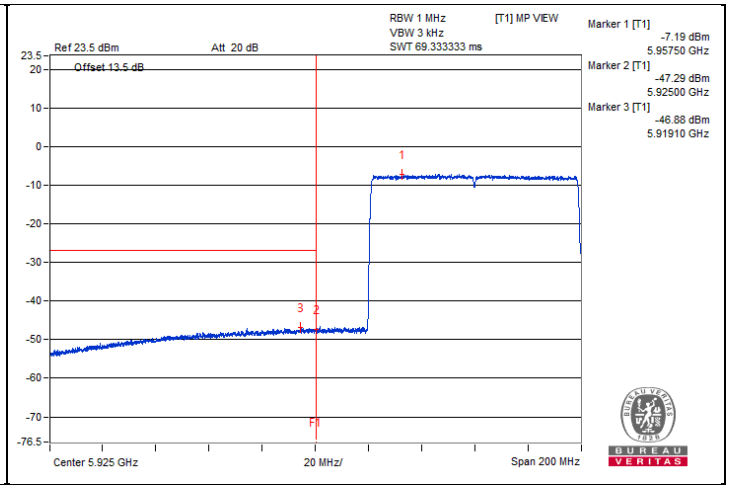

160 MHz Preamble 802.11be (RU996+484+242) - Channel 79

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12693.75	53.26 PK	74	-20.74	-46.76	4.76	-42.00
2	12693.75	43.35 AV	54	-10.65	-56.67	4.76	-51.91
3	19027.18	46.07 PK	74	-27.93	-53.95	4.76	-49.19
4	19035.81	35.91 AV	54	-18.09	-64.11	4.76	-59.35

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

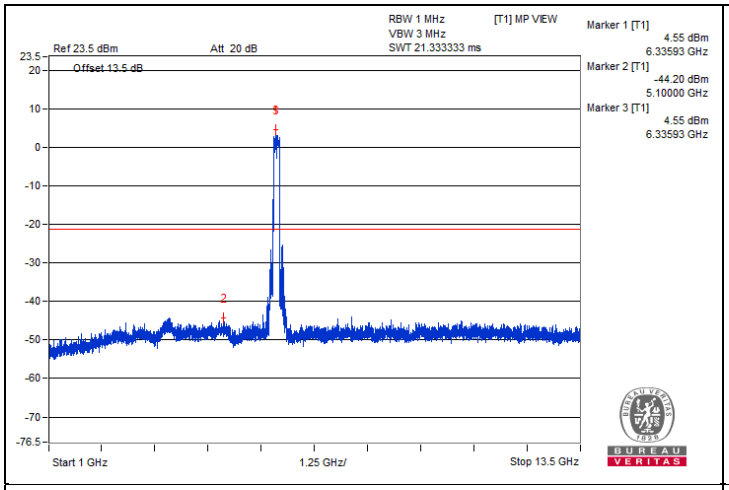
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.55 dBm
6.33593 GHz
Marker 2 [T1]
-44.20 dBm
5.10000 GHz
Marker 3 [T1]
4.55 dBm
6.33593 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

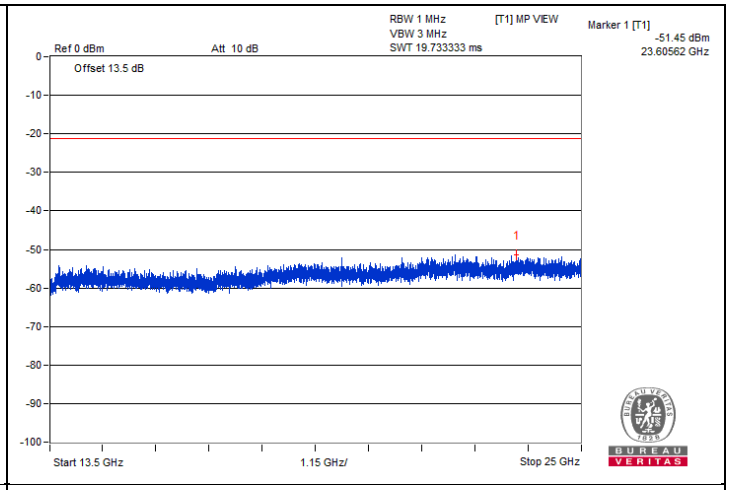
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.45 dBm
23.60562 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

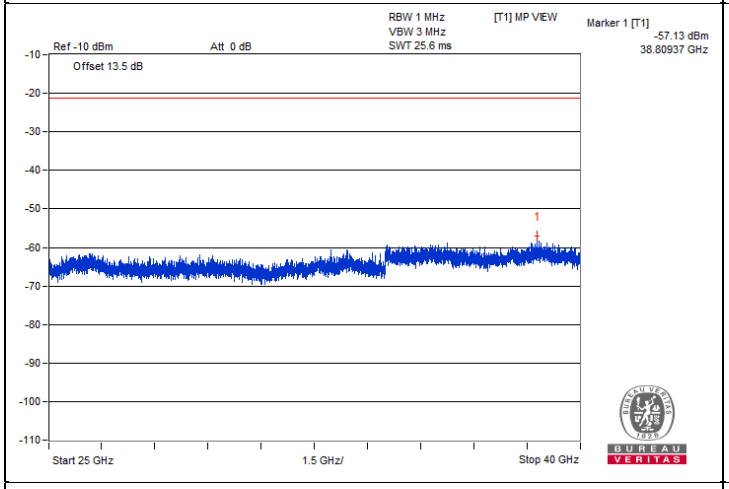
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.13 dBm
38.80937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

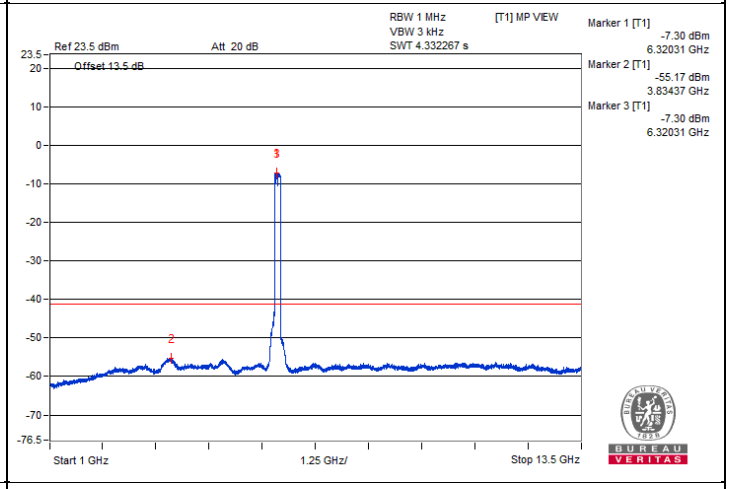
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.30 dBm
6.32031 GHz
Marker 2 [T1]
-55.17 dBm
3.83437 GHz
Marker 3 [T1]
-7.30 dBm
6.32031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

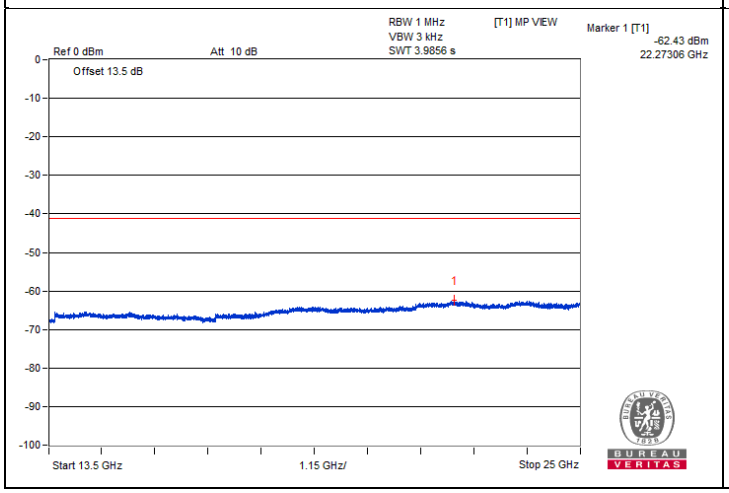
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.43 dBm
22.27306 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

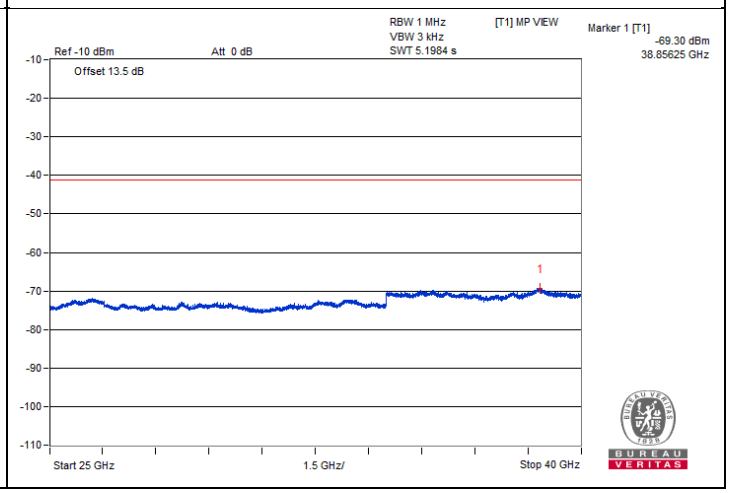
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.30 dBm
38.85625 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

160 MHz Preamble 802.11be (RU996+484+242) - Channel 143

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	13331.25	52.71 PK	74	-21.29	-47.31	4.76	-42.55
2	13328.12	42.9 AV	54	-11.1	-57.12	4.76	-52.36
3	20003.25	46.34 PK	74	-27.66	-53.68	4.76	-48.92
4	19993.18	36.09 AV	54	-17.91	-63.93	4.76	-59.17

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

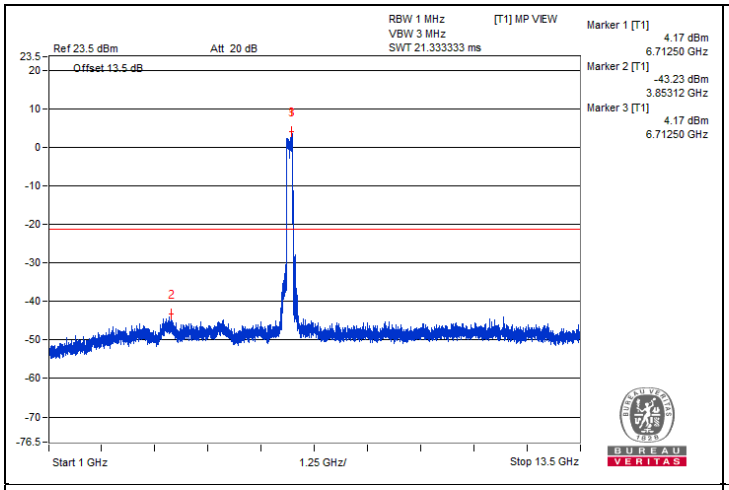
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.17 dBm
6.71250 GHz
Marker 2 [T1]
-43.23 dBm
3.85312 GHz
Marker 3 [T1]
4.17 dBm
6.71250 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

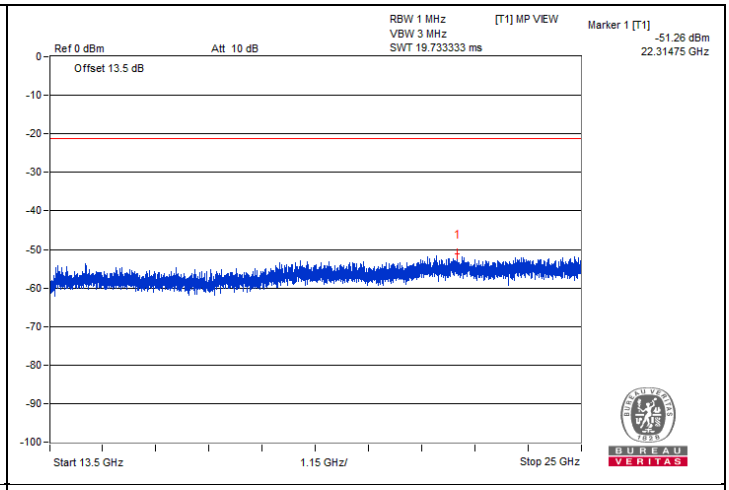
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.26 dBm
22.31475 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

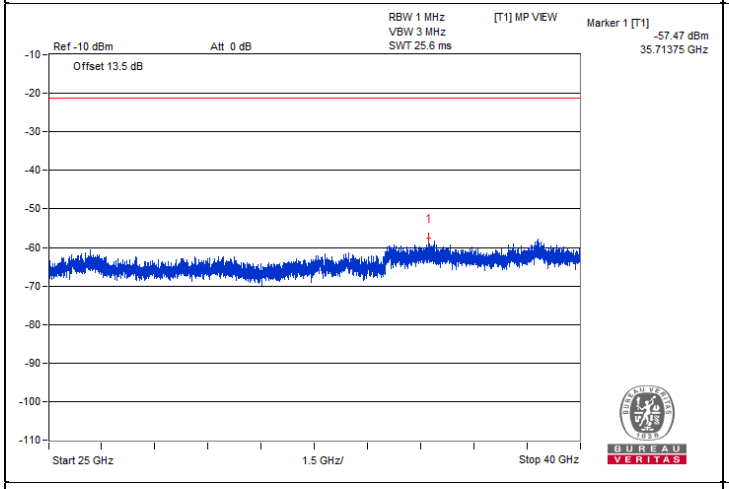
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.47 dBm
35.71375 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

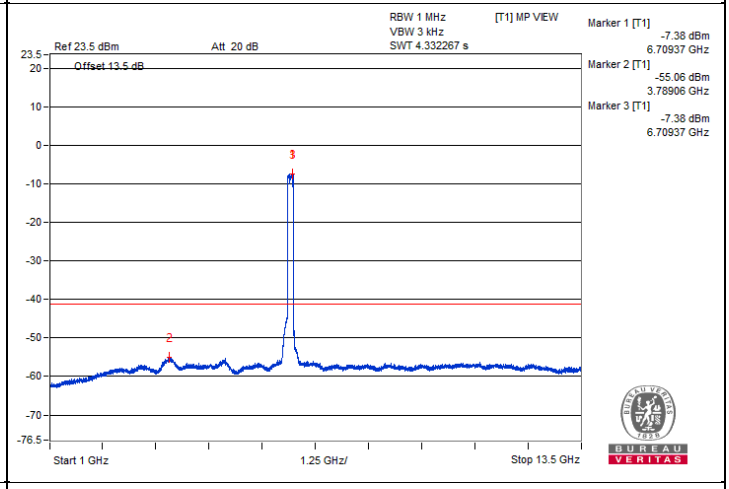
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.38 dBm
6.70937 GHz
Marker 2 [T1]
-55.06 dBm
3.78906 GHz
Marker 3 [T1]
-7.38 dBm
6.70937 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

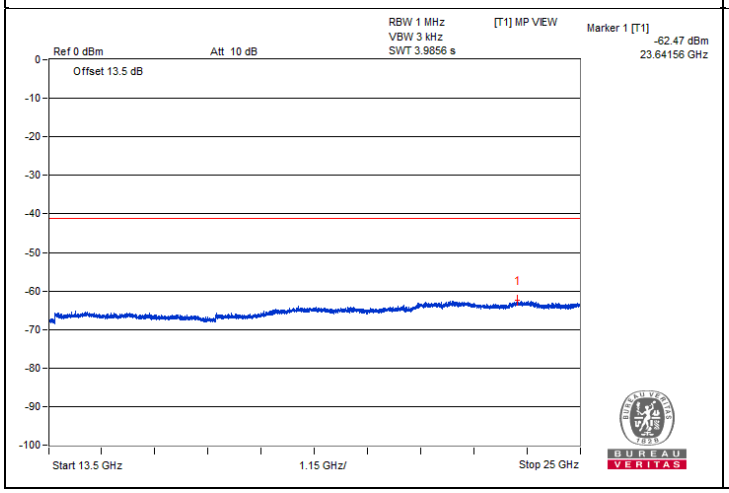
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.47 dBm
23.64156 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

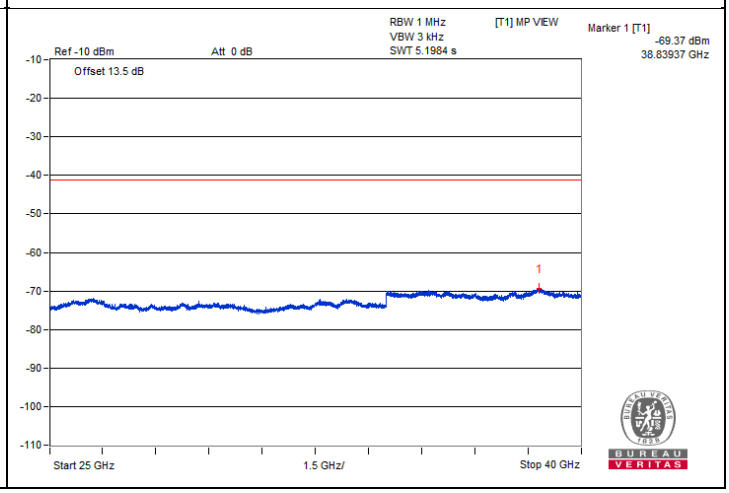
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.37 dBm
38.83937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

160 MHz Preamble 802.11be (RU996+484+242) - Channel 207

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13978.68	43.46 PK	88.2	-44.74	-56.56	4.76	-51.80
2	#13960	34.38 AV	68.2	-33.82	-65.64	4.76	-60.88
3	20953.43	46.53 PK	74	-27.47	-53.49	4.76	-48.73
4	20952	36.43 AV	54	-17.57	-63.59	4.76	-58.83

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

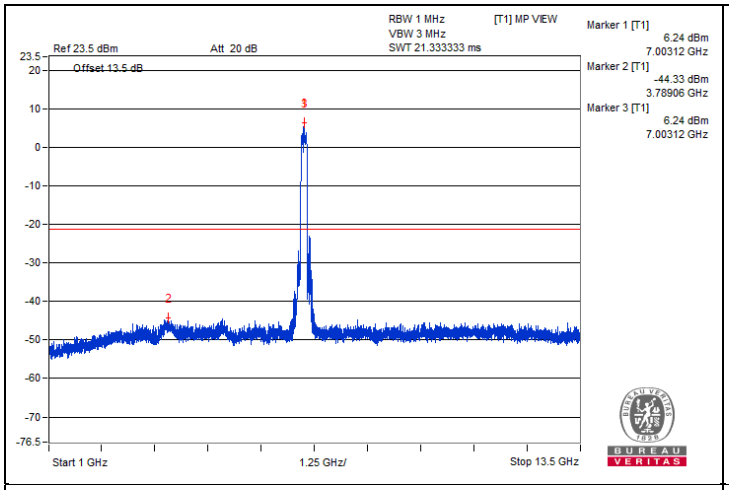
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
6.24 dBm
7.00312 GHz
Marker 2 [T1]
-44.33 dBm
3.78906 GHz
Marker 3 [T1]
6.24 dBm
7.00312 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

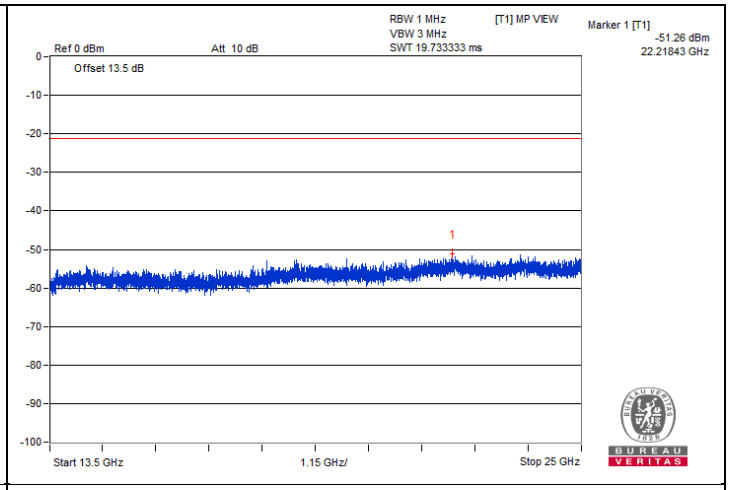
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.26 dBm
22.21843 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

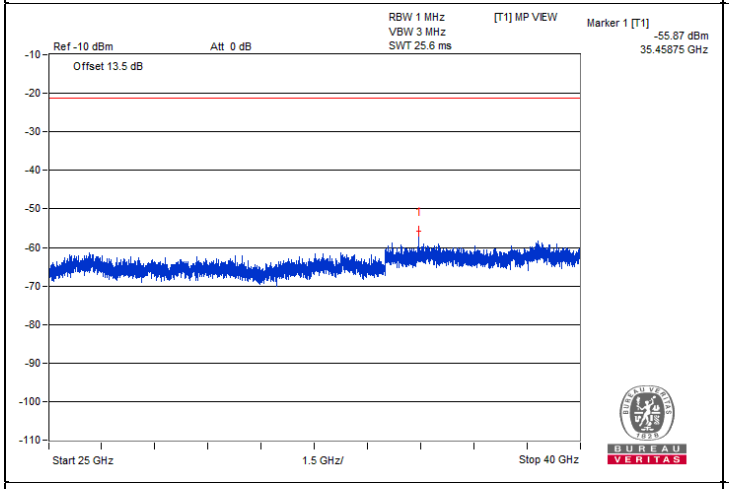
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-55.87 dBm
35.45875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

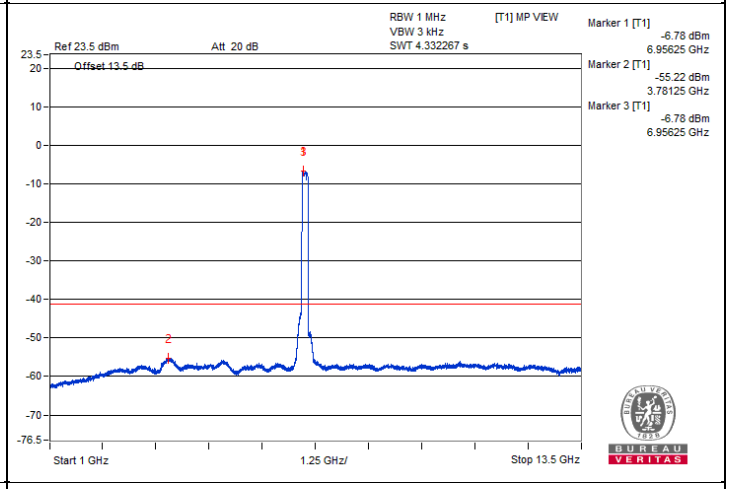
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.78 dBm
6.95625 GHz
Marker 2 [T1]
-55.22 dBm
3.78125 GHz
Marker 3 [T1]
-6.78 dBm
6.95625 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

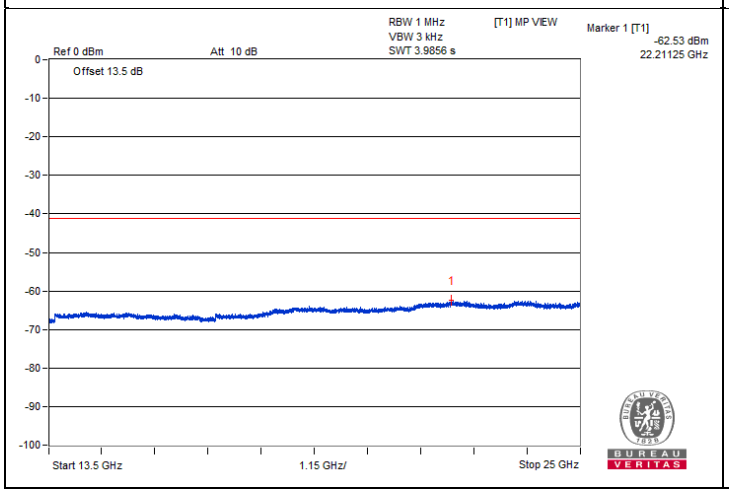
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.53 dBm
22.21125 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

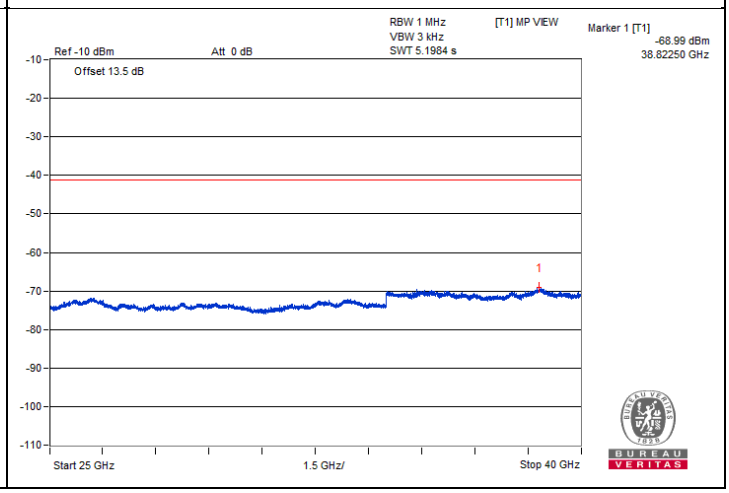
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.99 dBm
38.82250 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7132.02	76.3 PK	88.2	-11.9	-23.05	4.09	-18.96
2	#7125.95	51.12 AV	68.2	-17.08	-48.23	4.09	-44.14

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

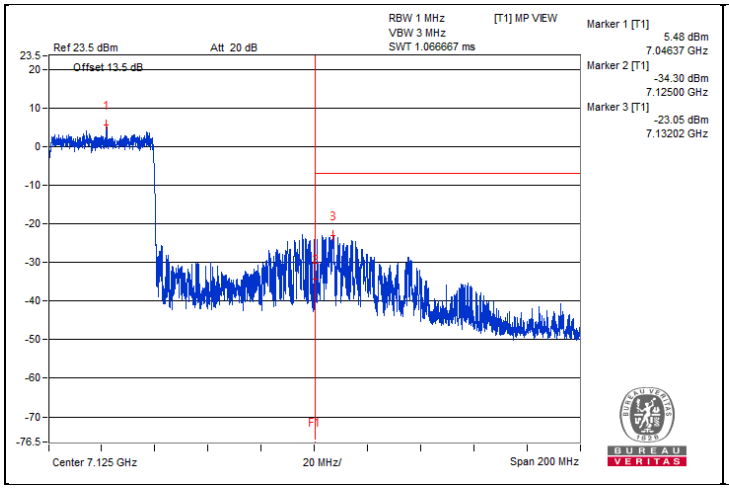

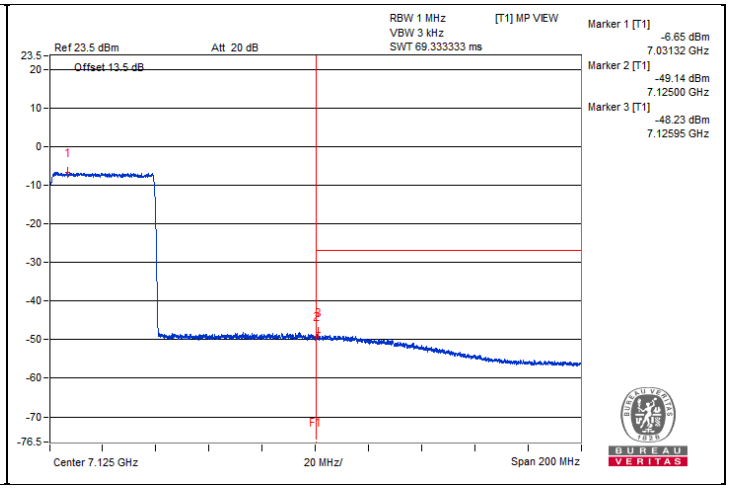

320 MHz Preamble 802.11be (RU996*2+484) - Channel 31

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12201.56	52.53 PK	74	-21.47	-47.49	4.76	-42.73
2	12201.56	42.43 AV	54	-11.57	-57.59	4.76	-52.83
3	18314.18	44.45 PK	74	-29.55	-55.57	4.76	-50.81
4	18309.87	34.68 AV	54	-19.32	-65.34	4.76	-60.58

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

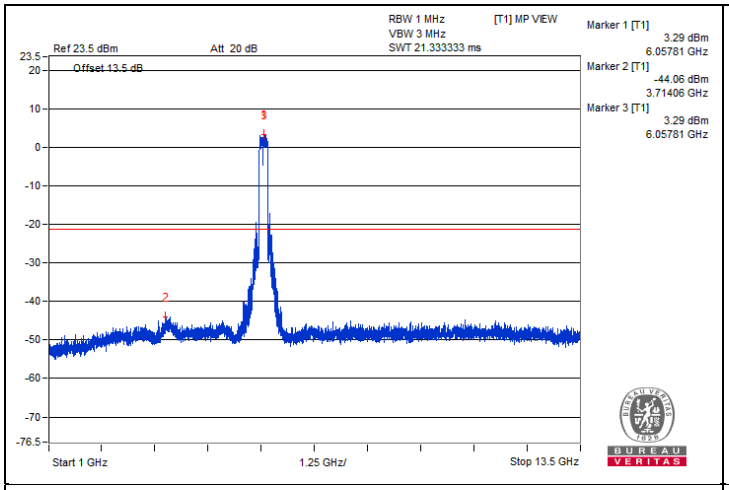
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.29 dBm
6.05781 GHz
Marker 2 [T1]
-44.06 dBm
3.71406 GHz
Marker 3 [T1]
3.29 dBm
6.05781 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

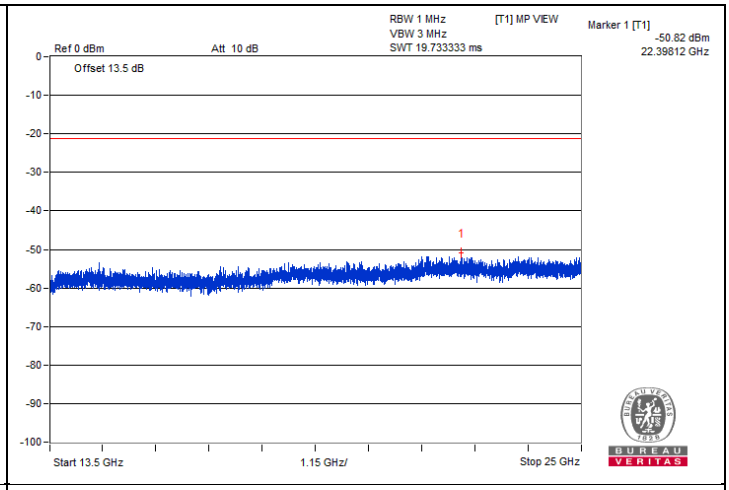
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.82 dBm
22.39812 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

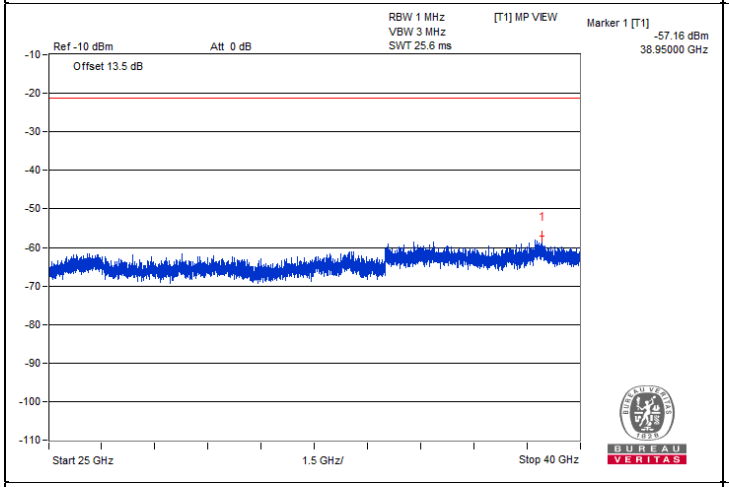
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.16 dBm
38.95000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

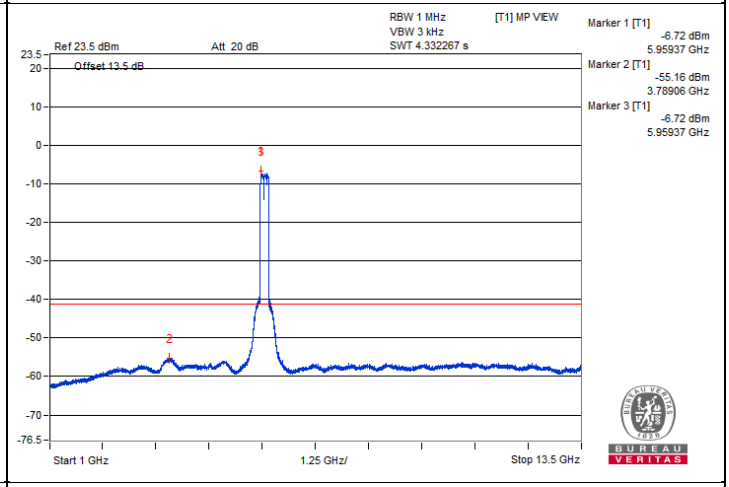
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.72 dBm
5.95937 GHz
Marker 2 [T1]
-55.16 dBm
3.78906 GHz
Marker 3 [T1]
-6.72 dBm
5.95937 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

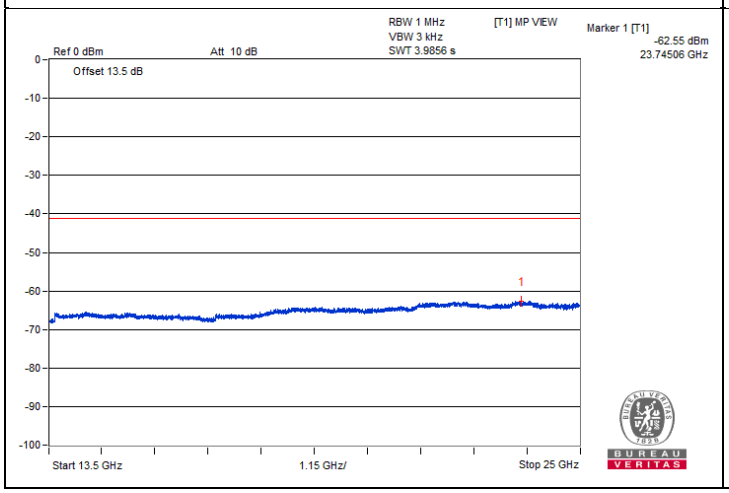
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.55 dBm
23.74506 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

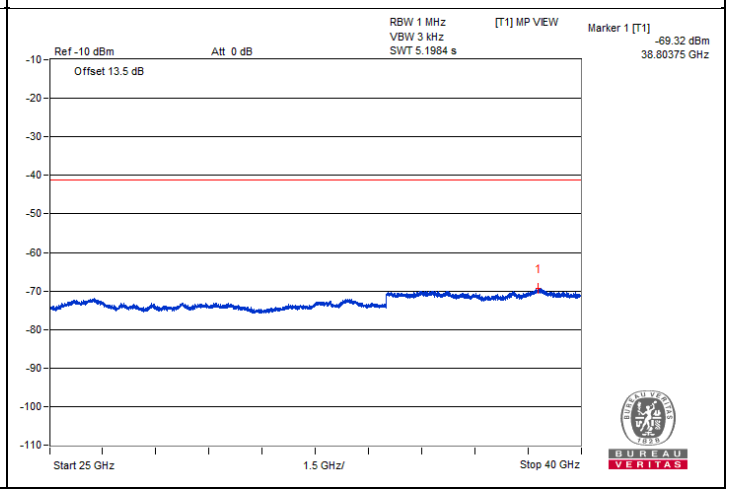
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.32 dBm
38.80375 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5874.47	81.27 PK	88.2	-6.93	-18.75	4.76	-13.99
2	#5923.15	60.89 AV	68.2	-7.31	-39.13	4.76	-34.37

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

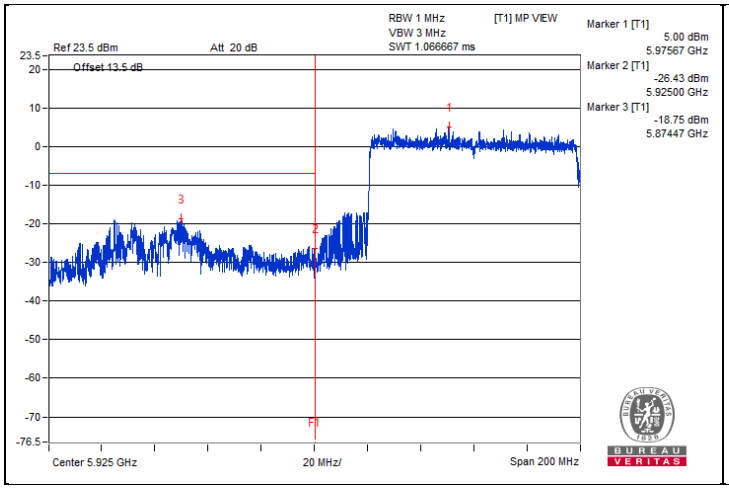

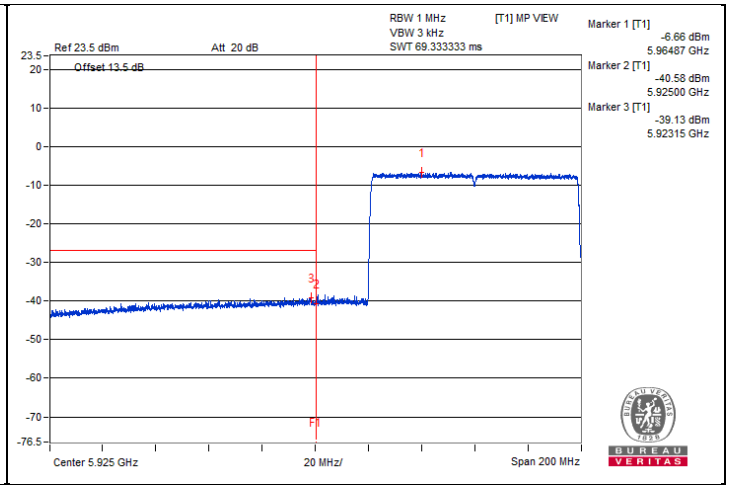

320 MHz Preamble 802.11be (RU996*2+484) - Channel 63

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12532.81	52.22 PK	74	-21.78	-47.8	4.76	-43.04
2	12539.06	42.52 AV	54	-11.48	-57.5	4.76	-52.74
3	18795.75	45.26 PK	74	-28.74	-54.76	4.76	-50.00
4	18797.18	35.12 AV	54	-18.88	-64.9	4.76	-60.14

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

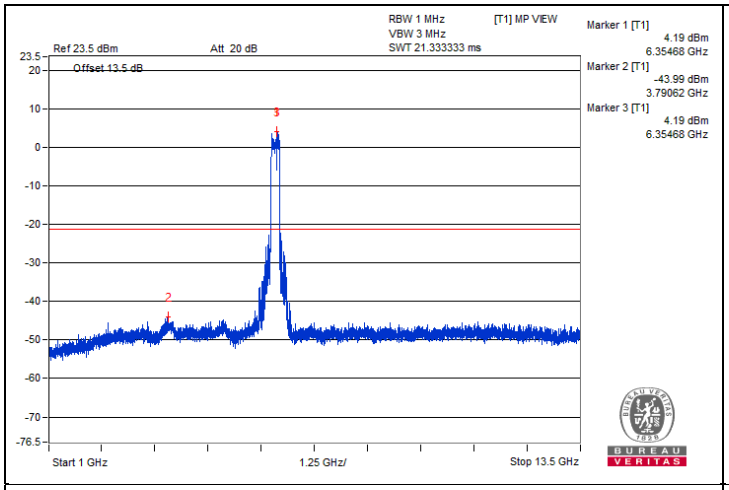
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.19 dBm
6.35468 GHz
Marker 2 [T1]
-43.99 dBm
3.79062 GHz
Marker 3 [T1]
4.19 dBm
6.35468 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

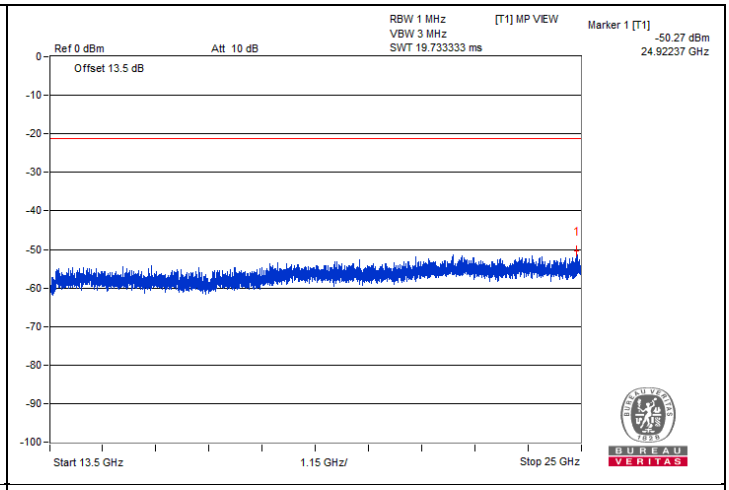
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.27 dBm
24.92237 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

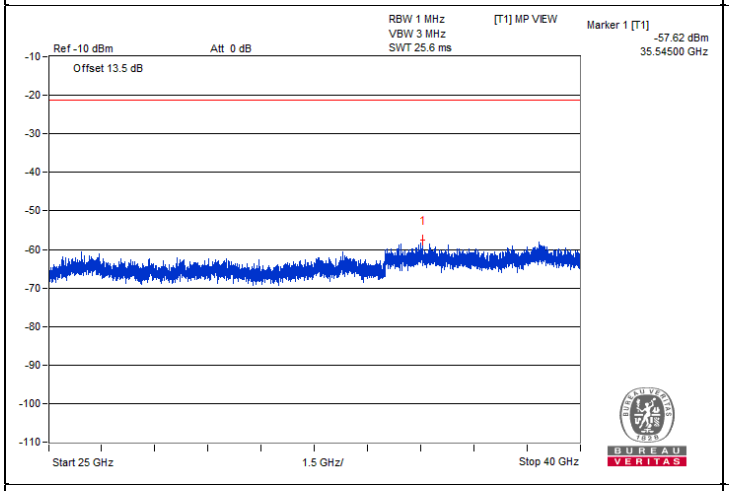
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.62 dBm
35.54500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

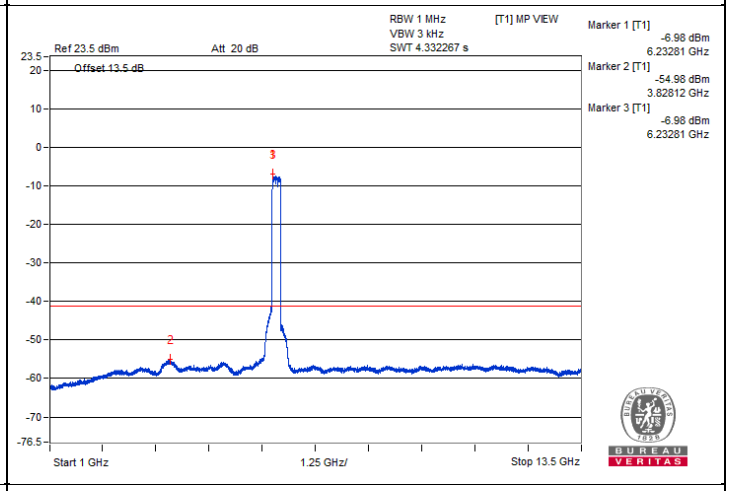
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.98 dBm
6.23281 GHz
Marker 2 [T1]
-54.98 dBm
3.82812 GHz
Marker 3 [T1]
-6.98 dBm
6.23281 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

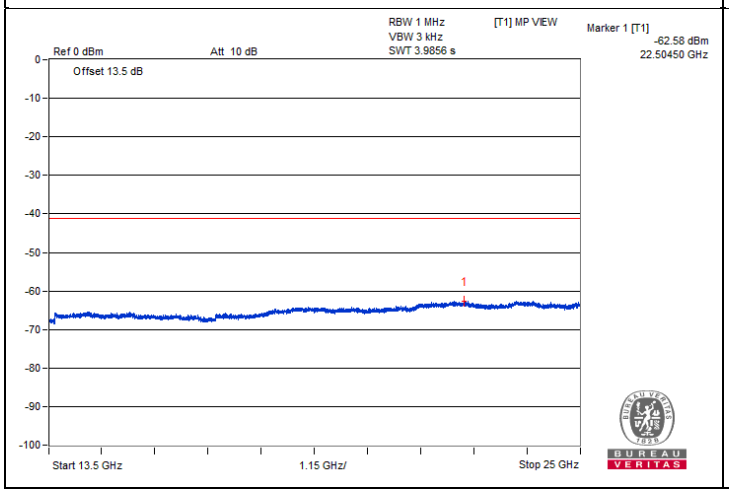
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.58 dBm
22.50450 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

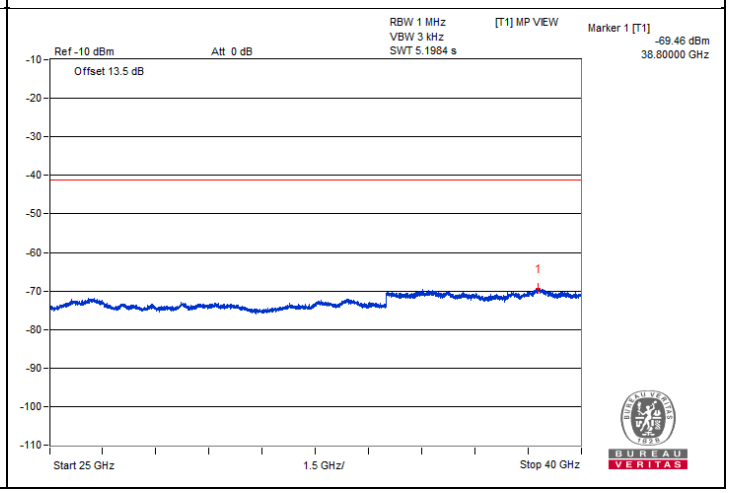
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.46 dBm
38.80000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

320 MHz Preamble 802.11be (RU996*2+484) - Channel 127

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13162.5	53.07 PK	88.2	-35.13	-46.95	4.76	-42.19
2	#13176.56	42.2 AV	68.2	-26	-57.82	4.76	-53.06
3	19756	45.88 PK	74	-28.12	-54.14	4.76	-49.38
4	19763.18	35.47 AV	54	-18.53	-64.55	4.76	-59.79

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

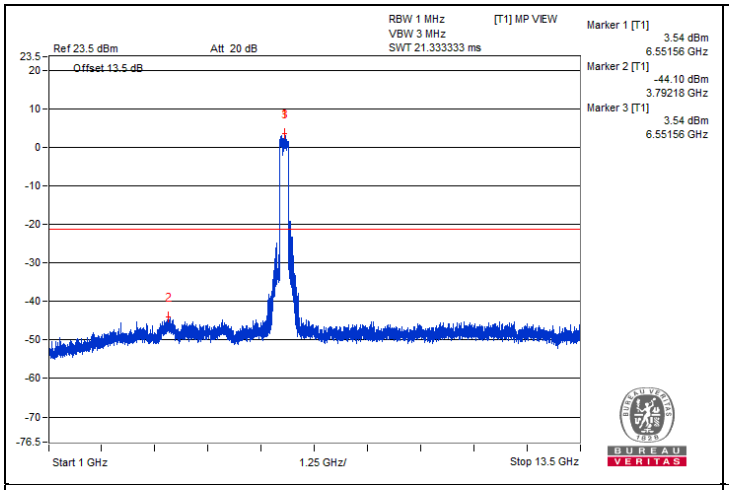
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.54 dBm
6.55156 GHz
Marker 2 [T1]
-44.10 dBm
3.79218 GHz
Marker 3 [T1]
3.54 dBm
6.55156 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

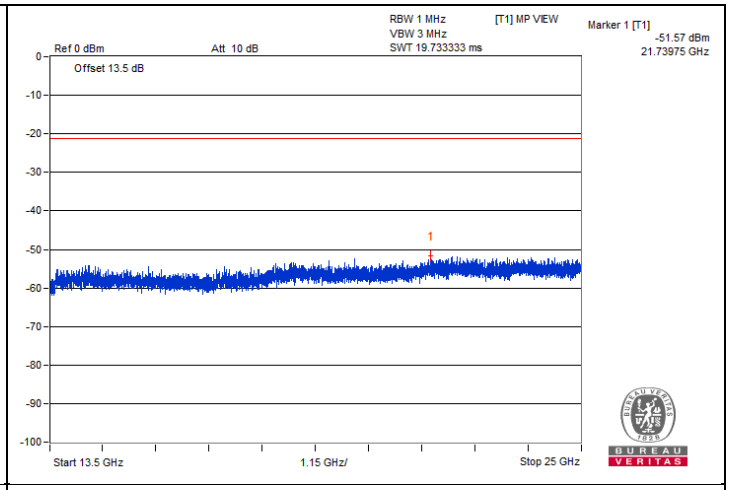
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.57 dBm
21.73975 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

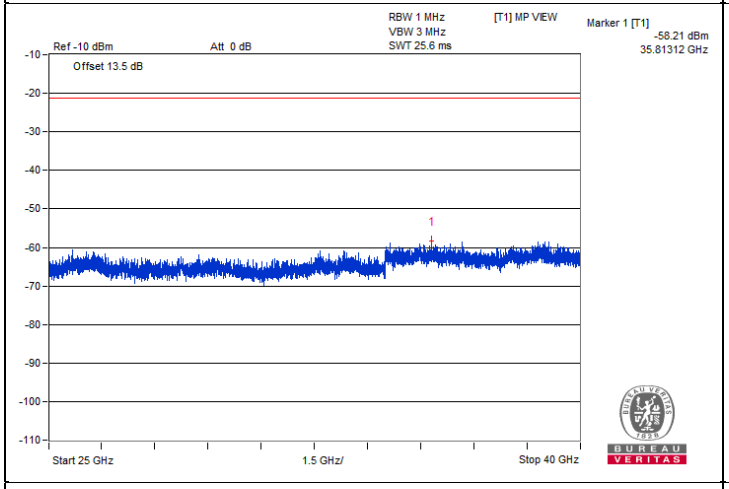
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.21 dBm
35.81312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

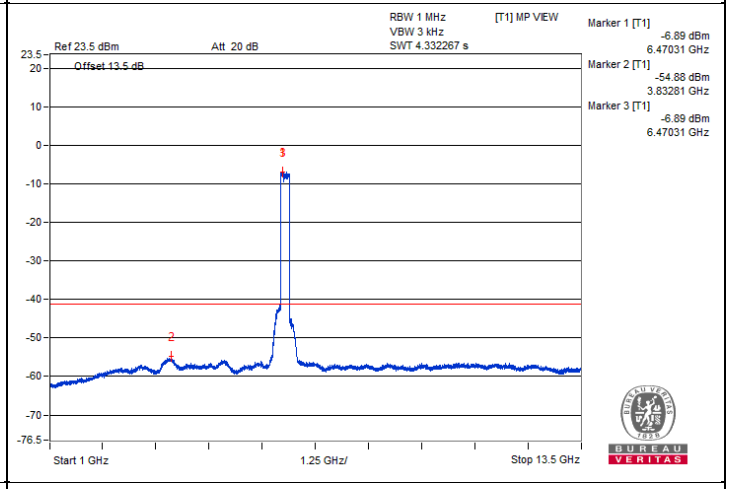
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.89 dBm
6.47031 GHz
Marker 2 [T1]
-54.88 dBm
3.83281 GHz
Marker 3 [T1]
-6.89 dBm
6.47031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

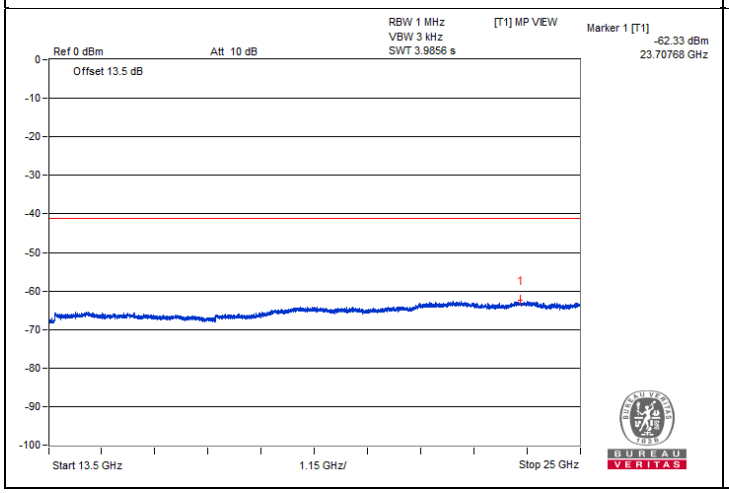
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.33 dBm
23.70768 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

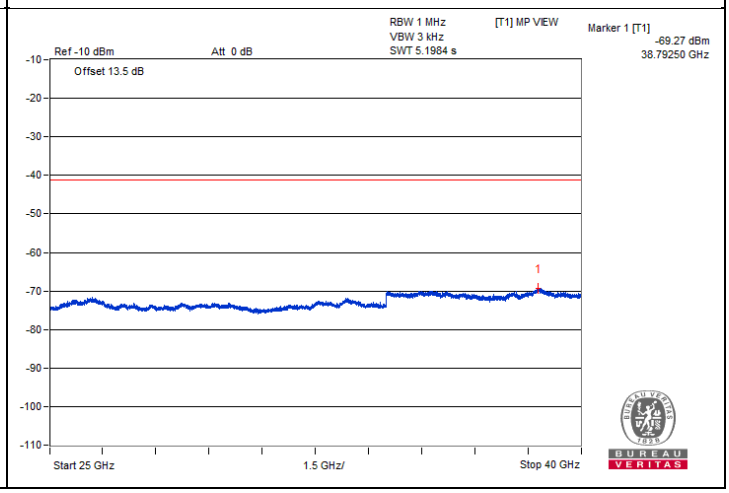
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.27 dBm
38.79250 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

320 MHz Preamble 802.11be (RU996*2+484) - Channel 191

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13817.68	43.46 PK	88.2	-44.74	-56.56	4.76	-51.80
2	#13817.68	33.6 AV	68.2	-34.6	-66.42	4.76	-61.66
3	20724.87	46.8 PK	74	-27.2	-53.22	4.76	-48.46
4	20707.62	35.32 AV	54	-18.68	-64.7	4.76	-59.94

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

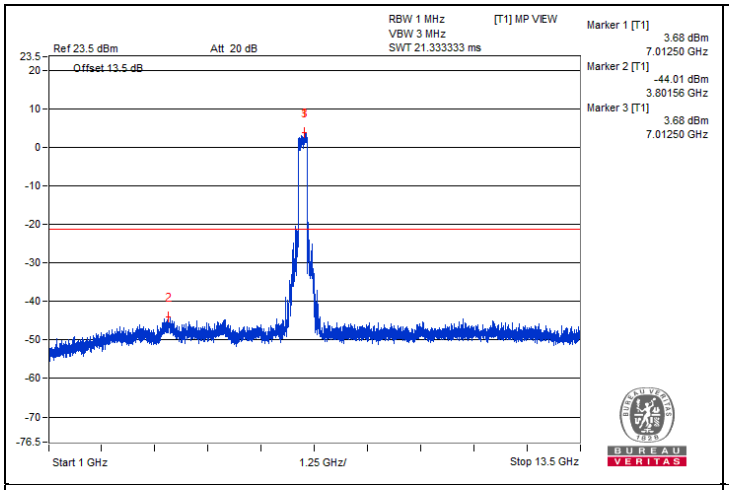
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.68 dBm
7.01250 GHz
Marker 2 [T1]
-44.01 dBm
3.80156 GHz
Marker 3 [T1]
3.68 dBm
7.01250 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

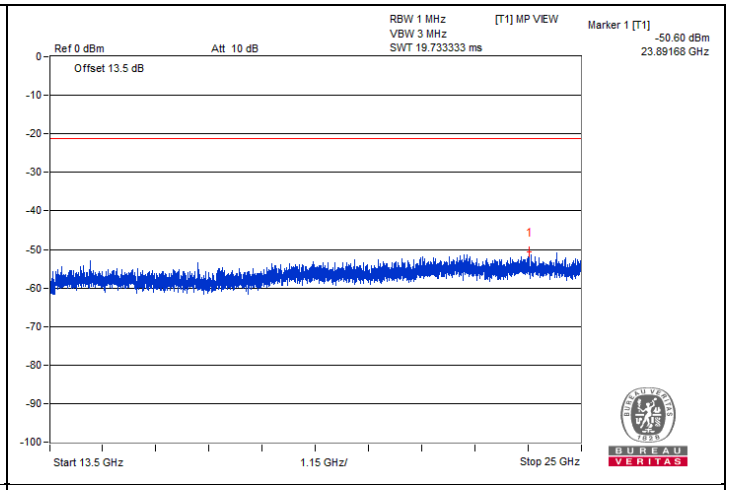
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.60 dBm
23.89168 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

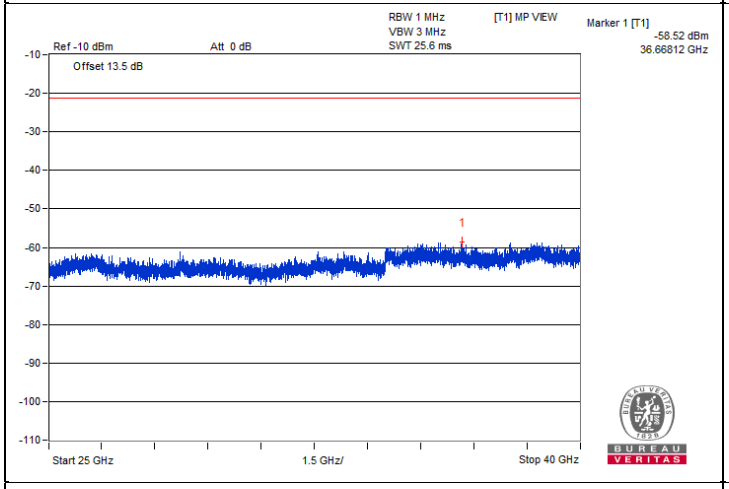
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.52 dBm
36.66812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

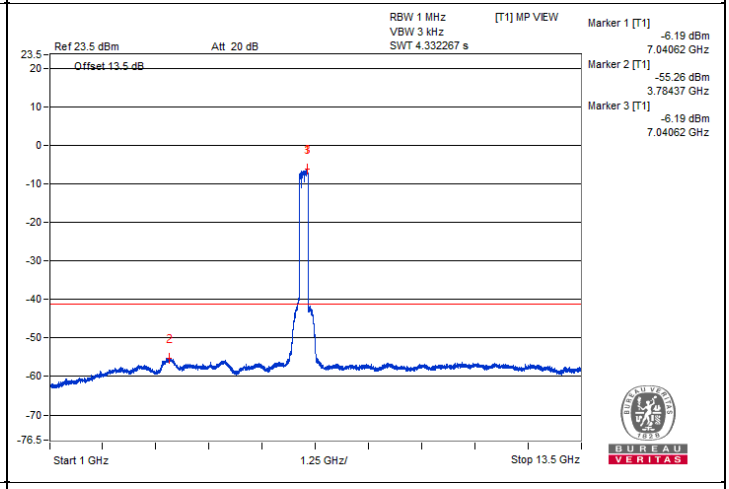
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.19 dBm
7.04062 GHz
Marker 2 [T1]
-55.26 dBm
3.78437 GHz
Marker 3 [T1]
-6.19 dBm
7.04062 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

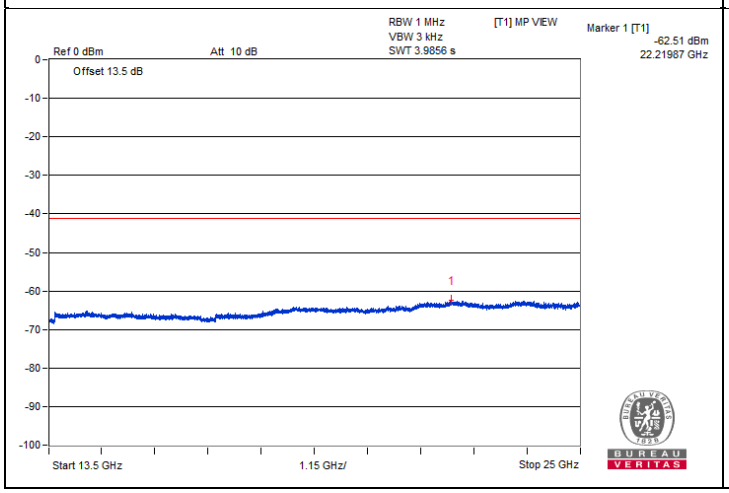
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.51 dBm
22.21987 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

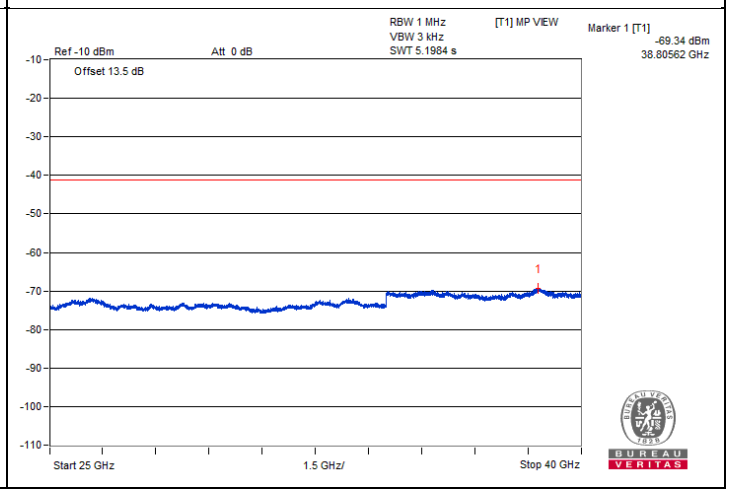
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.34 dBm
38.80562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7148.92	75.55 PK	88.2	-12.65	-23.8	4.09	-19.71
2	#7131.4	58.69 AV	68.2	-9.51	-40.66	4.09	-36.57

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

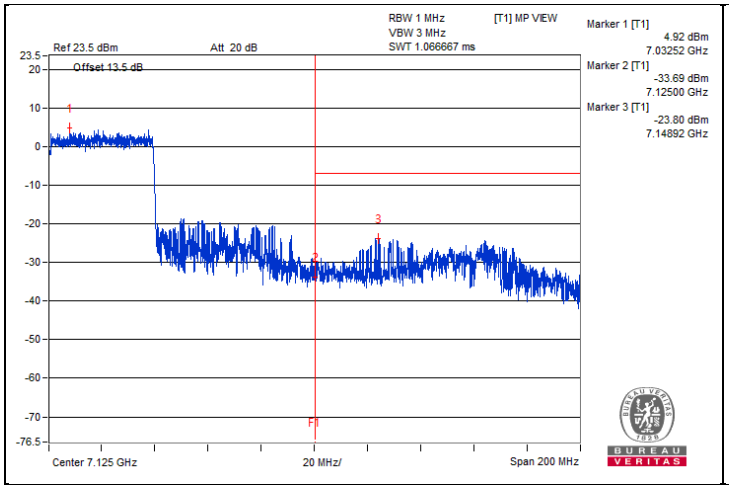

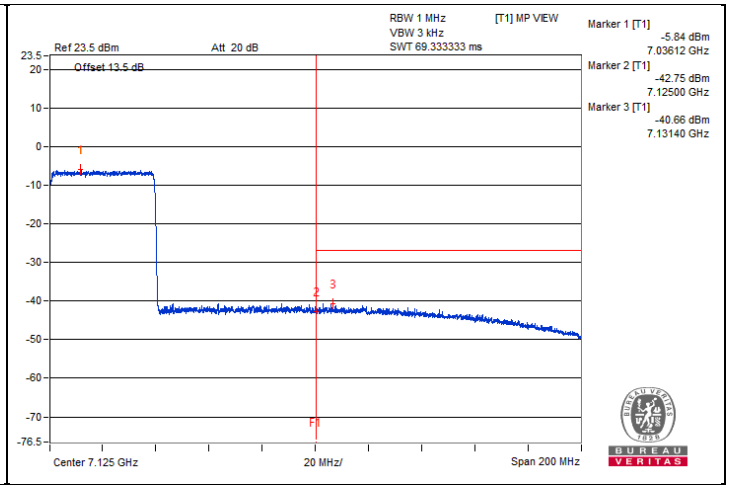

320 MHz Preamble 802.11be (RU996*3) - Channel 31

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12201.56	52.38 PK	74	-21.62	-47.64	4.76	-42.88
2	12206.25	42.53 AV	54	-11.47	-57.49	4.76	-52.73
3	18318.5	44.89 PK	74	-29.11	-55.13	4.76	-50.37
4	18318.5	34.63 AV	54	-19.37	-65.39	4.76	-60.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

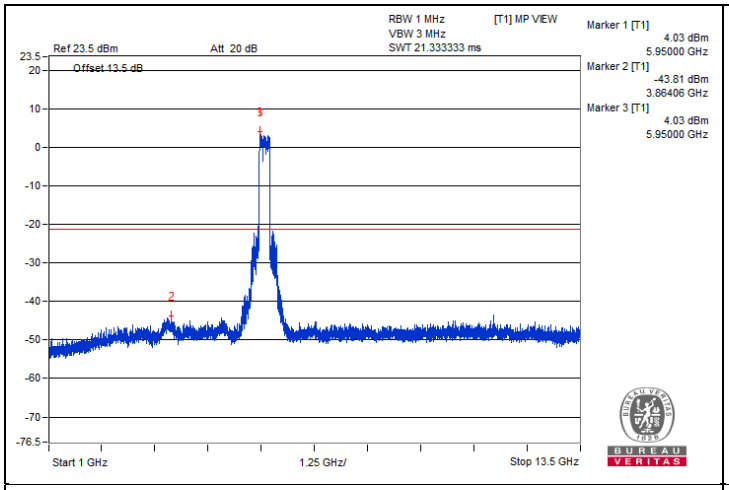
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.03 dBm
5.95000 GHz
Marker 2 [T1]
-43.81 dBm
3.86406 GHz
Marker 3 [T1]
4.03 dBm
5.95000 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

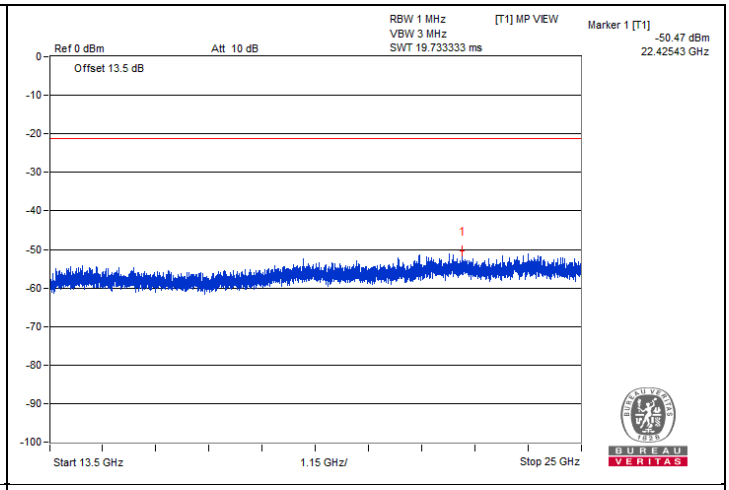
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.47 dBm
22.42543 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

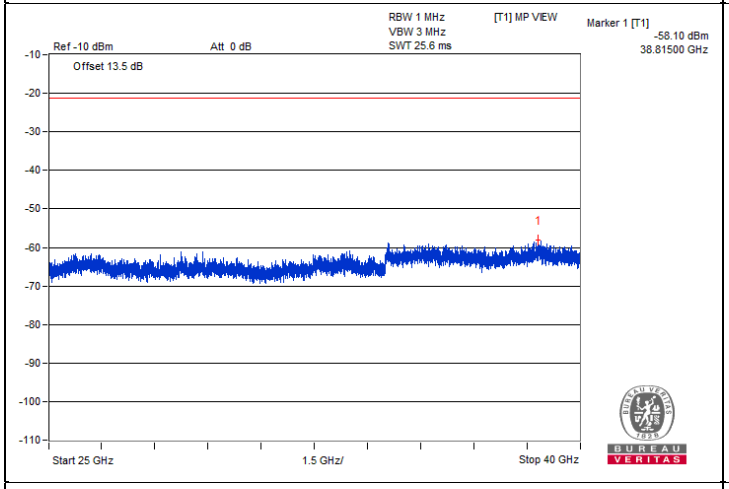
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.10 dBm
38.81500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

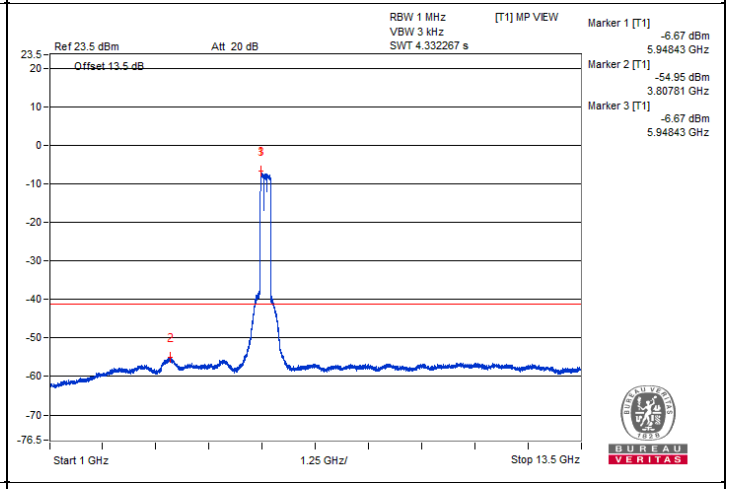
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.67 dBm
5.94843 GHz
Marker 2 [T1]
-54.95 dBm
3.80781 GHz
Marker 3 [T1]
-6.67 dBm
5.94843 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

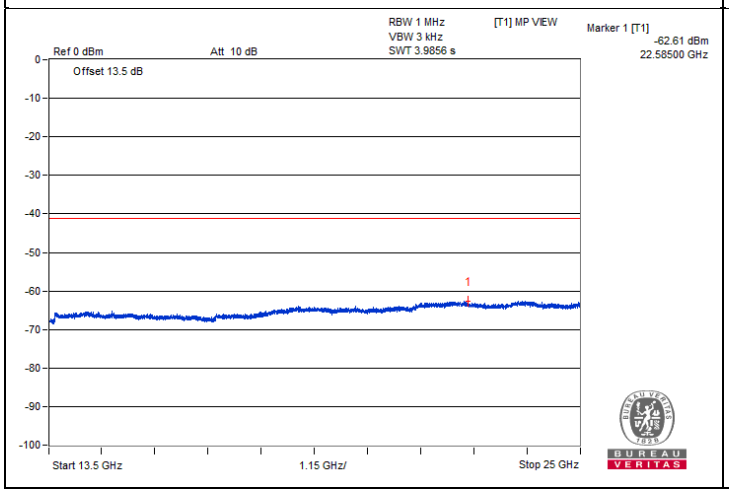
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.61 dBm
22.58500 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

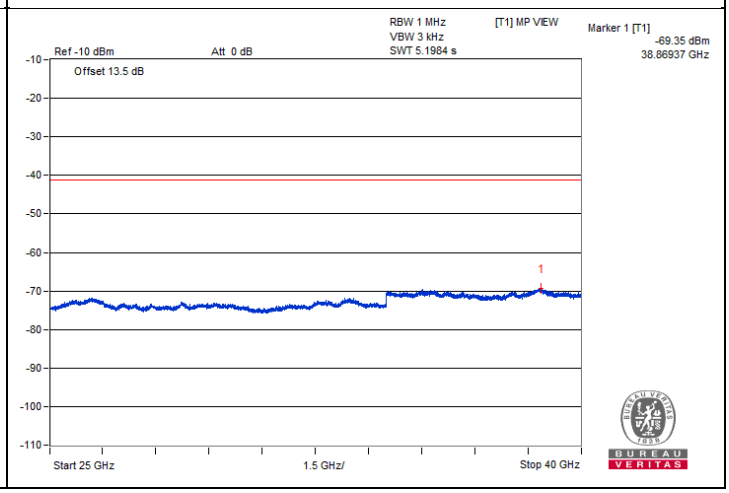
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.35 dBm
38.86937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5922.95	80.74 PK	88.2	-7.46	-19.28	4.76	-14.52
2	#5912.52	62.44 AV	68.2	-5.76	-37.58	4.76	-32.82

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

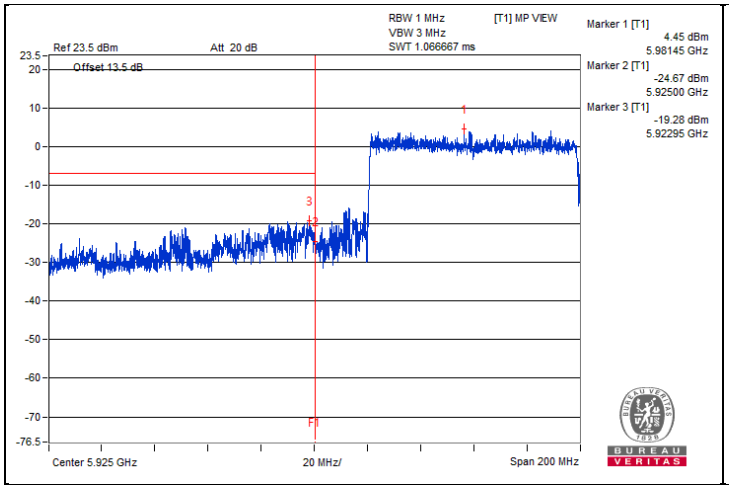

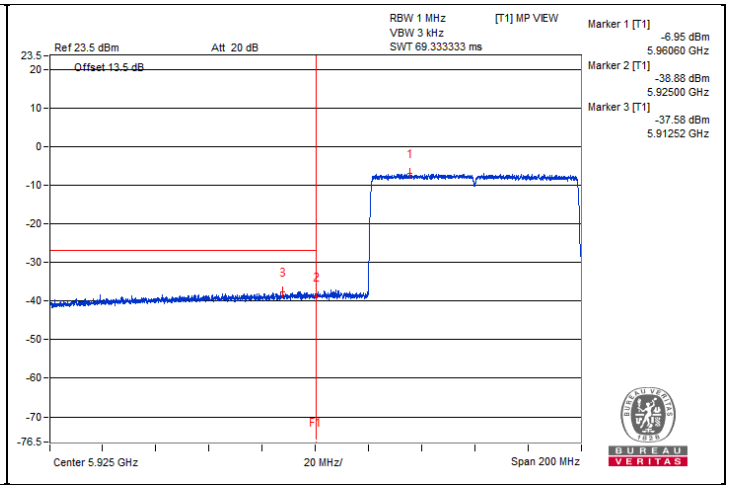

320 MHz Preamble 802.11be (RU996*3) - Channel 63

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12535.93	53.05 PK	74	-20.95	-46.97	4.76	-42.21
2	12535.93	42.64 AV	54	-11.36	-57.38	4.76	-52.62
3	18801.5	44.59 PK	74	-29.41	-55.43	4.76	-50.67
4	18800.06	35.67 AV	54	-18.33	-64.35	4.76	-59.59

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

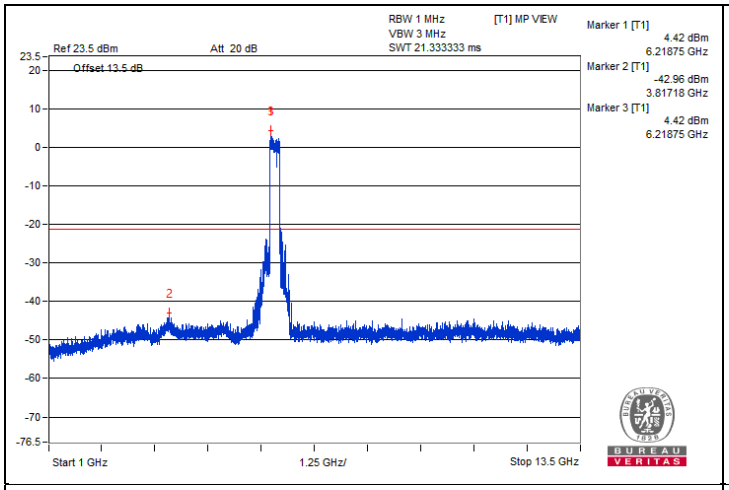
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.42 dBm
6.21875 GHz
Marker 2 [T1]
-42.96 dBm
3.81718 GHz
Marker 3 [T1]
4.42 dBm
6.21875 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

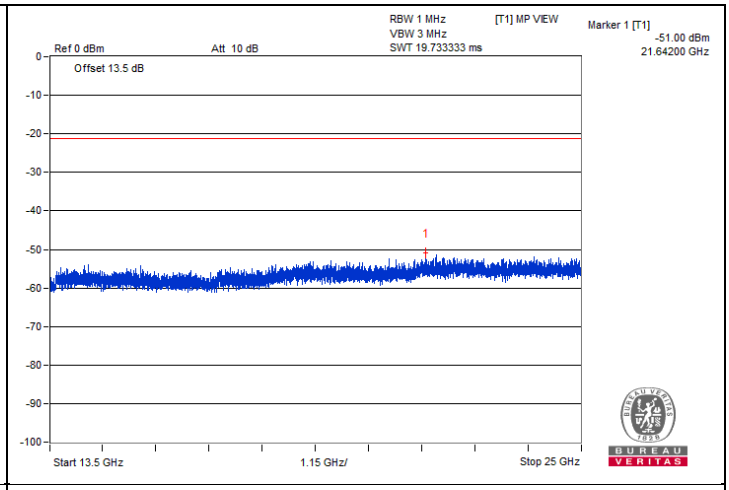
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.00 dBm
21.64200 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

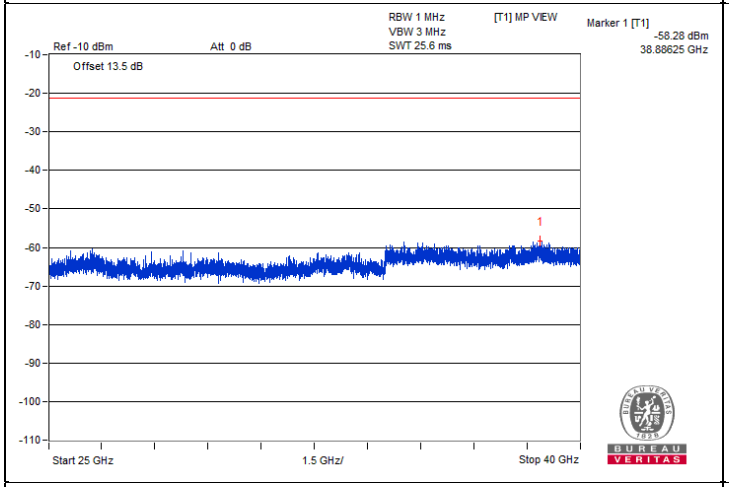
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.28 dBm
38.88625 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

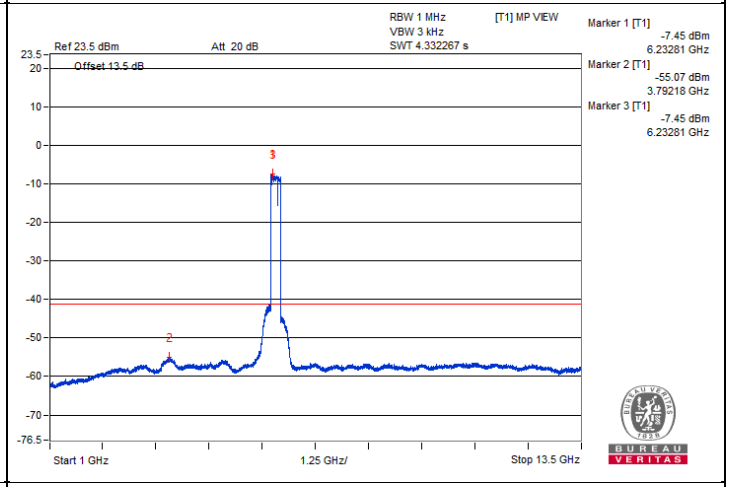
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.45 dBm
6.23281 GHz
Marker 2 [T1]
-55.07 dBm
3.79218 GHz
Marker 3 [T1]
-7.45 dBm
6.23281 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

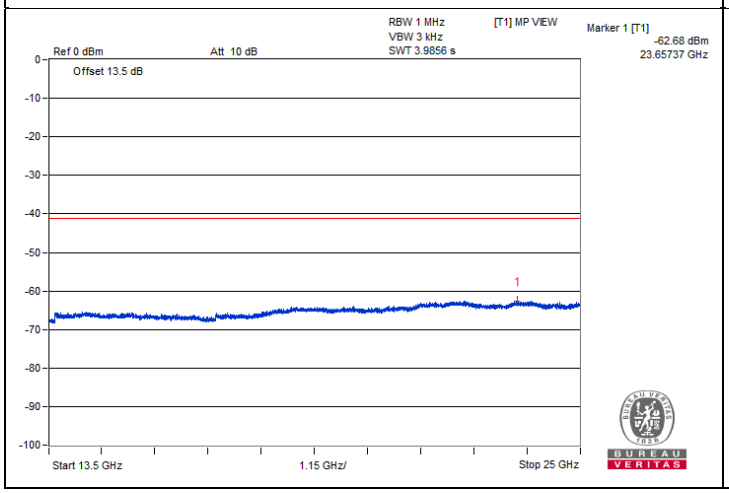
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.68 dBm
23.65737 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

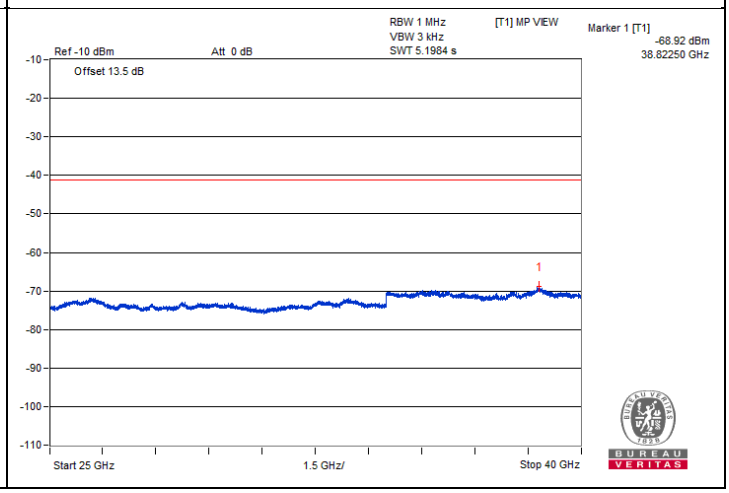
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-68.92 dBm
38.82250 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

320 MHz Preamble 802.11be (RU996*3) - Channel 127

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13165.62	52.5 PK	88.2	-35.7	-47.52	4.76	-42.76
2	#13164.06	42.27 AV	68.2	-25.93	-57.75	4.76	-52.99
3	19760.31	44.72 PK	74	-29.28	-55.3	4.76	-50.54
4	19761.75	35.15 AV	54	-18.85	-64.87	4.76	-60.11

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

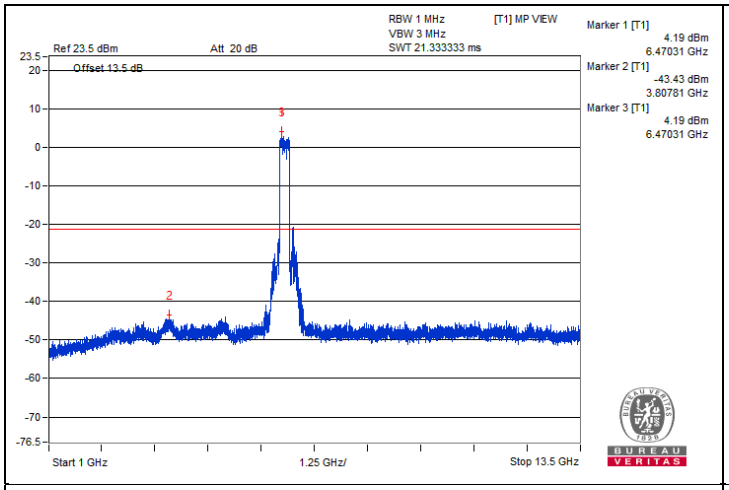
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.19 dBm
6.47031 GHz
Marker 2 [T1]
-43.43 dBm
3.80781 GHz
Marker 3 [T1]
4.19 dBm
6.47031 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

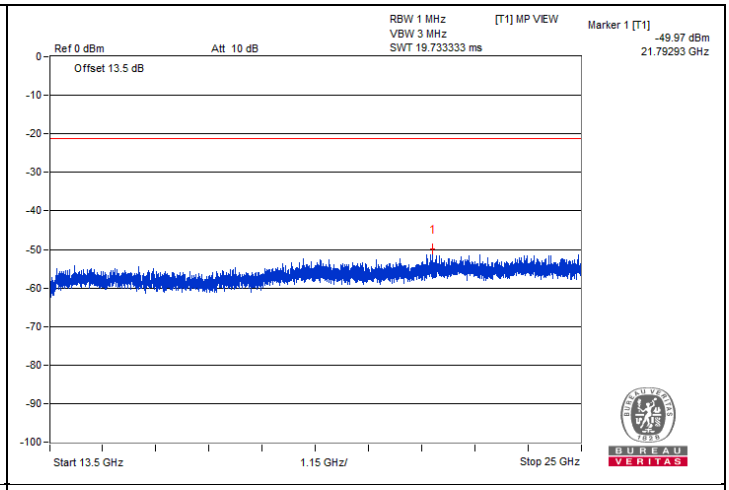
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-49.97 dBm
21.79293 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

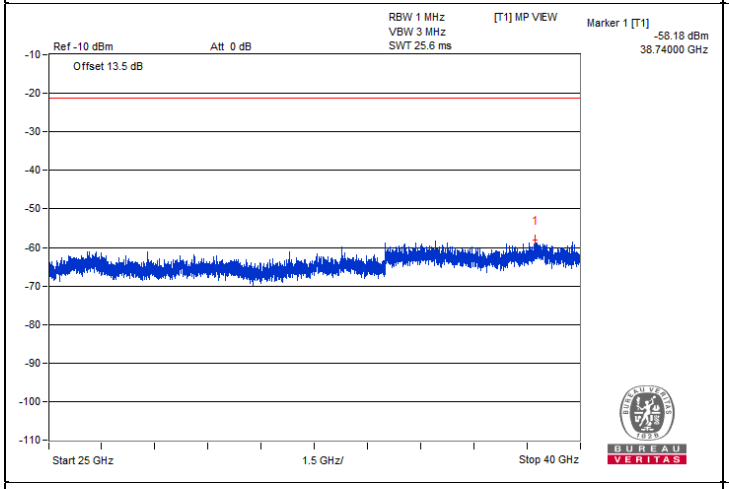
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.18 dBm
38.74000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

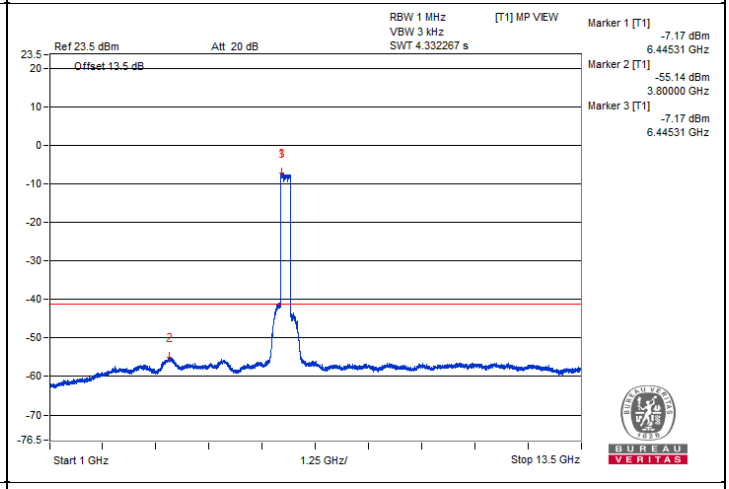
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.17 dBm
6.44531 GHz
Marker 2 [T1]
-55.14 dBm
3.80000 GHz
Marker 3 [T1]
-7.17 dBm
6.44531 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

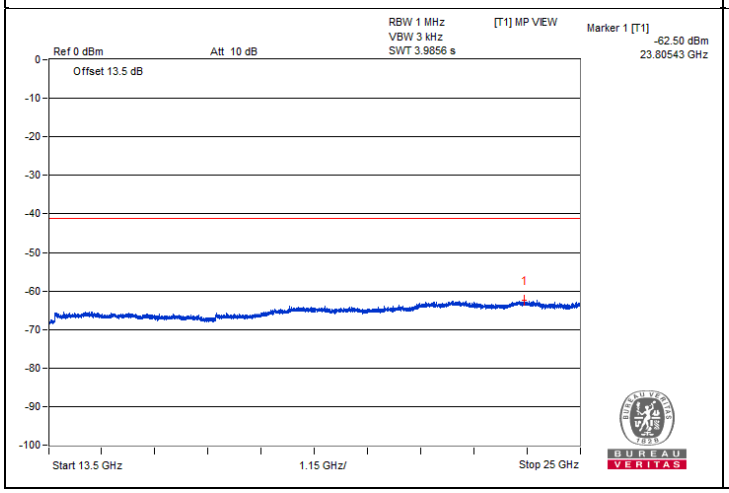
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.50 dBm
23.80543 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

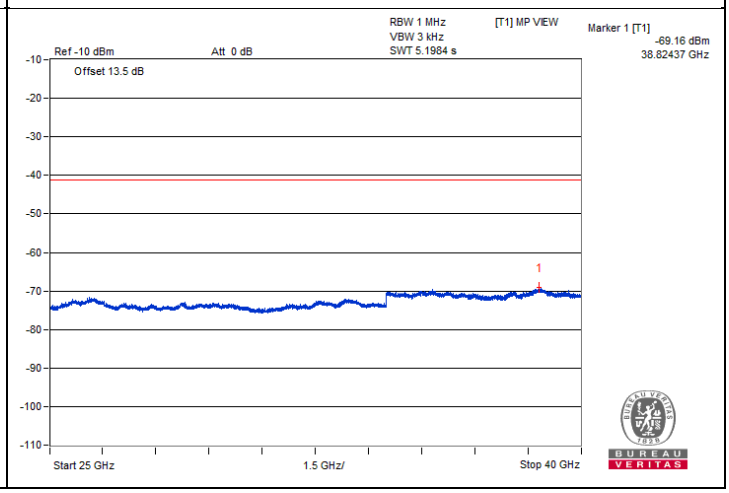
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.16 dBm
38.82437 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

320 MHz Preamble 802.11be (RU996*3) - Channel 191

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13804.75	44.41 PK	88.2	-43.79	-55.61	4.76	-50.85
2	#13814.81	33.84 AV	68.2	-34.36	-66.18	4.76	-61.42
3	20722	45.65 PK	74	-28.35	-54.37	4.76	-49.61
4	20710.5	35.49 AV	54	-18.51	-64.53	4.76	-59.77

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

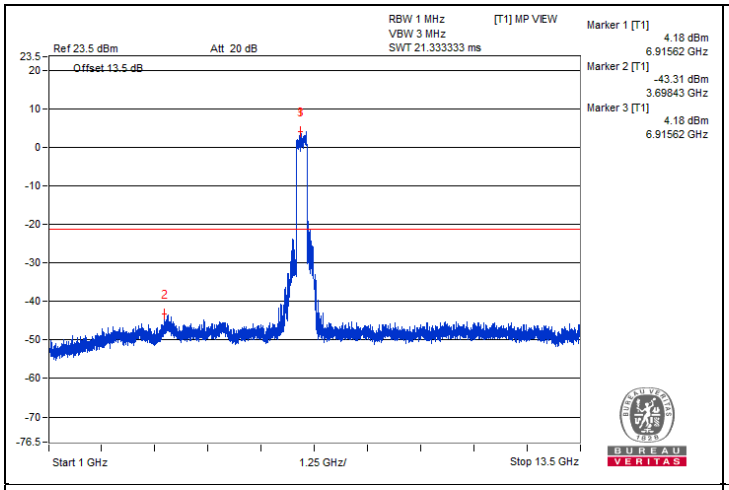
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.18 dBm
6.91562 GHz
Marker 2 [T1]
-43.31 dBm
3.69843 GHz
Marker 3 [T1]
4.18 dBm
6.91562 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

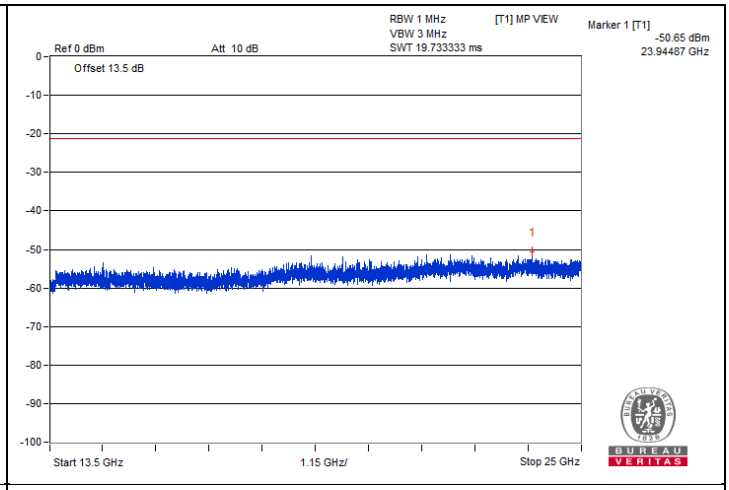
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.65 dBm
23.94487 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

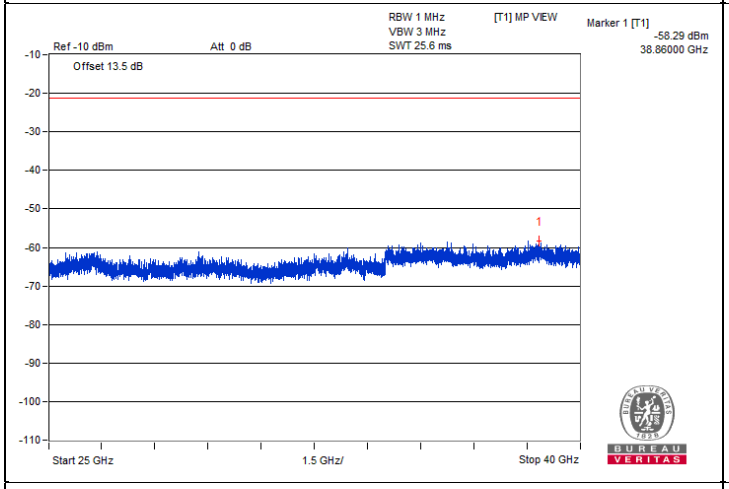
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.29 dBm
38.86000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

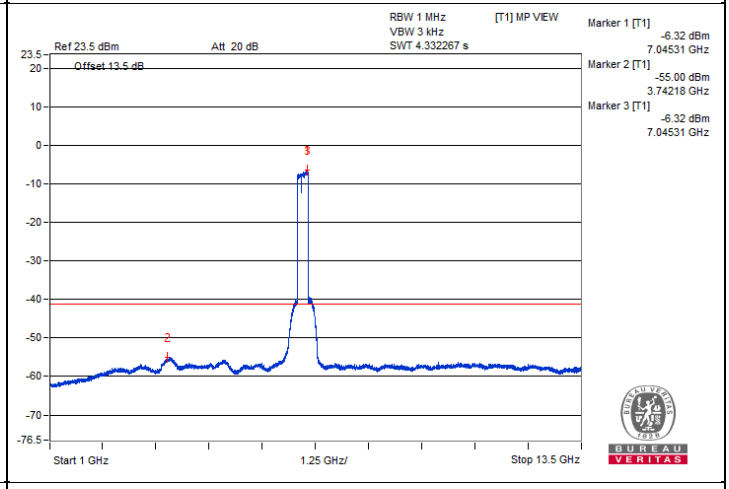
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.32 dBm
7.04531 GHz
Marker 2 [T1]
-55.00 dBm
3.74218 GHz
Marker 3 [T1]
-6.32 dBm
7.04531 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

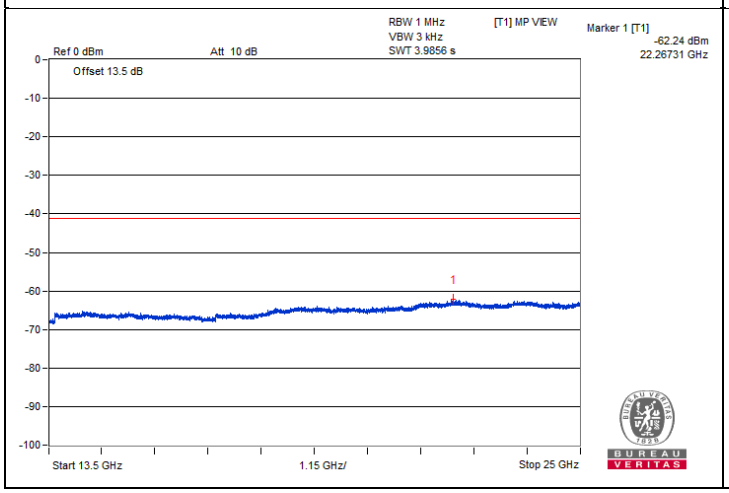
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.24 dBm
22.26731 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

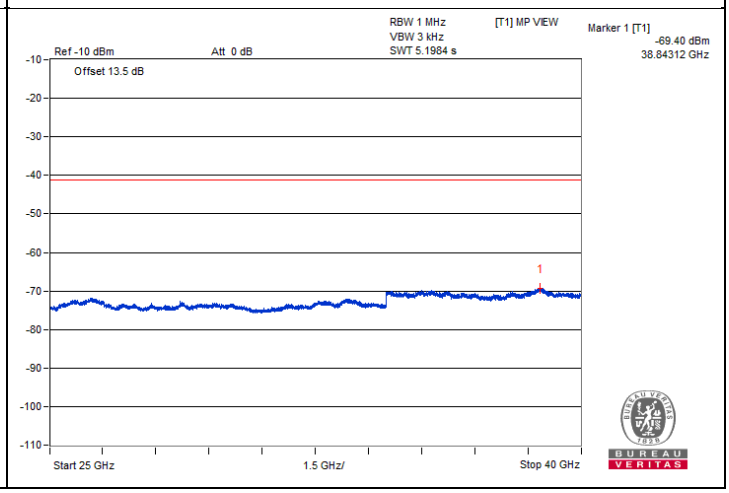
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.40 dBm
38.84312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7136	78.91 PK	88.2	-9.29	-20.44	4.09	-16.35
2	#7130.97	60.46 AV	68.2	-7.74	-38.89	4.09	-34.80

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

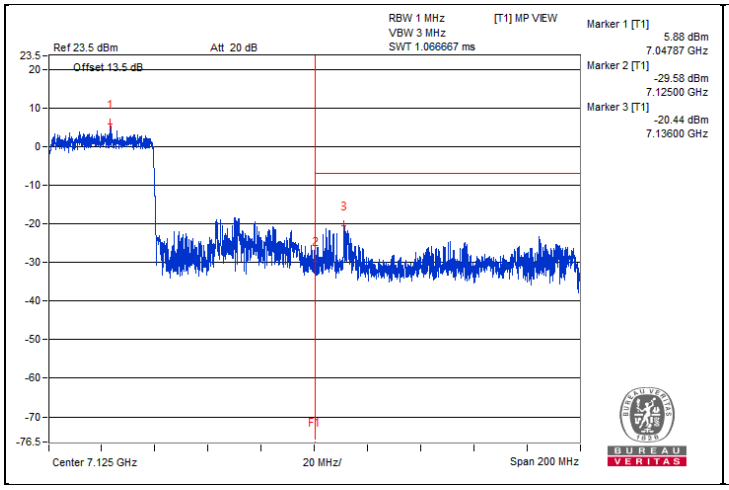

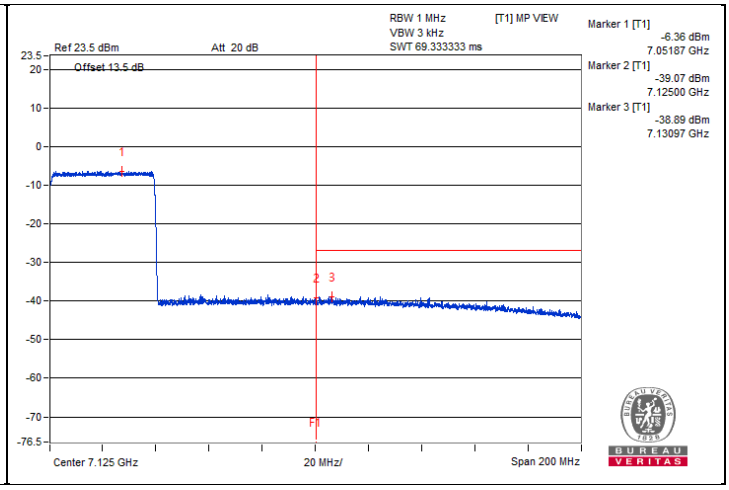

320 MHz Preamble 802.11be (RU996*3+484) - Channel 31

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12206.25	54.26 PK	74	-19.74	-45.76	4.76	-41.00
2	12210.93	42.8 AV	54	-11.2	-57.22	4.76	-52.46
3	18307	45 PK	74	-29	-55.02	4.76	-50.26
4	18317.06	34.72 AV	54	-19.28	-65.3	4.76	-60.54

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

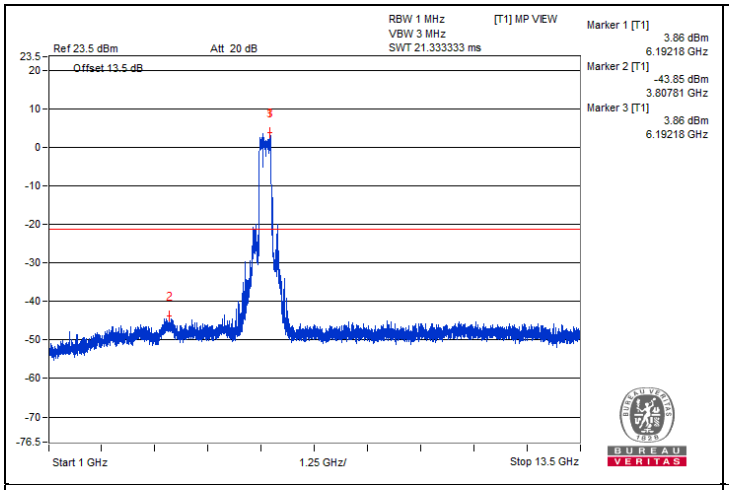
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
3.86 dBm
6.19218 GHz
Marker 2 [T1]
-43.85 dBm
3.80781 GHz
Marker 3 [T1]
3.86 dBm
6.19218 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

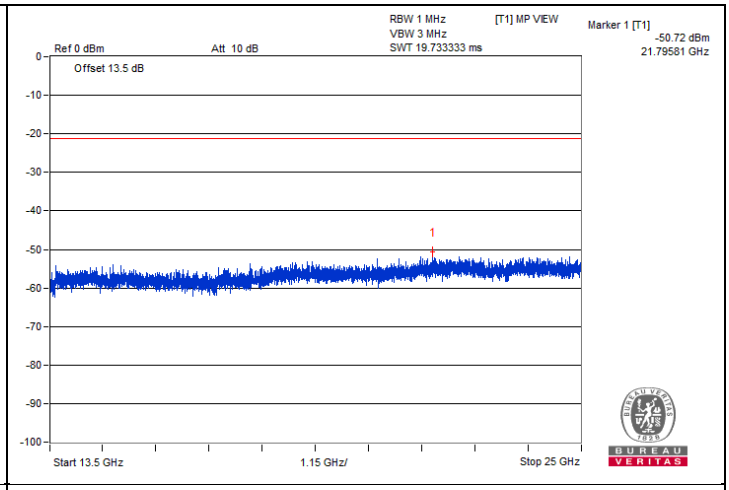
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.72 dBm
21.79581 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

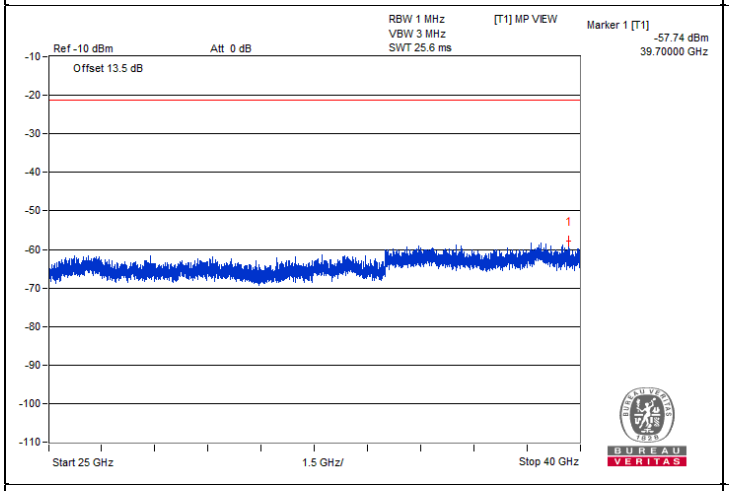
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.74 dBm
39.70000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

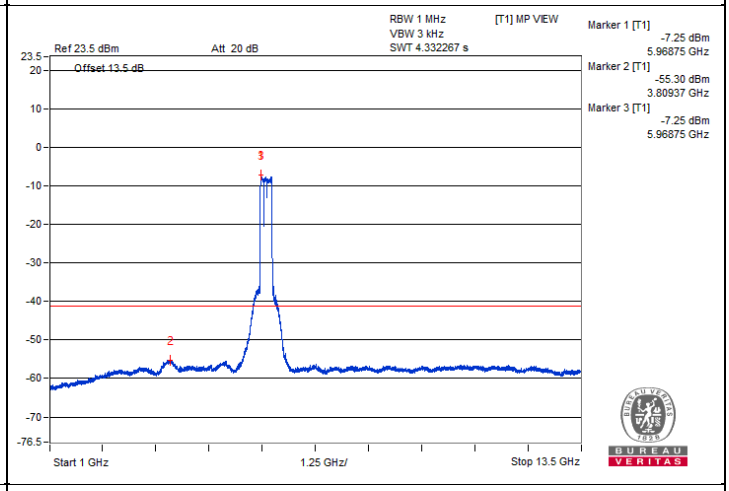
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.25 dBm
5.96875 GHz
Marker 2 [T1]
-55.30 dBm
3.80937 GHz
Marker 3 [T1]
-7.25 dBm
5.96875 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

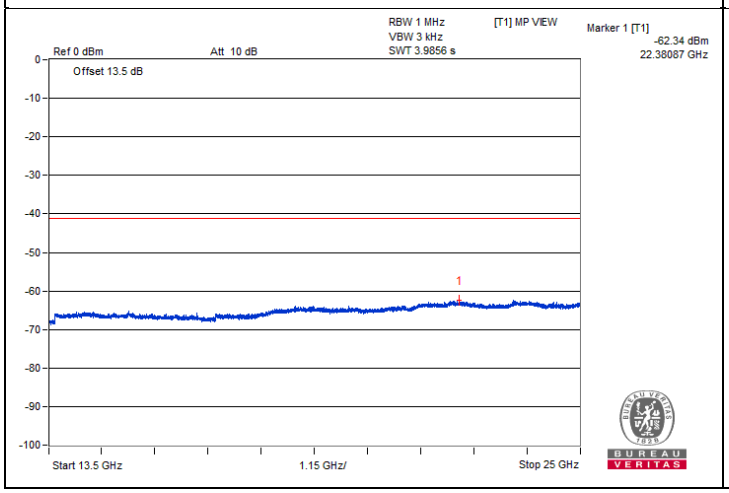
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.34 dBm
22.38087 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

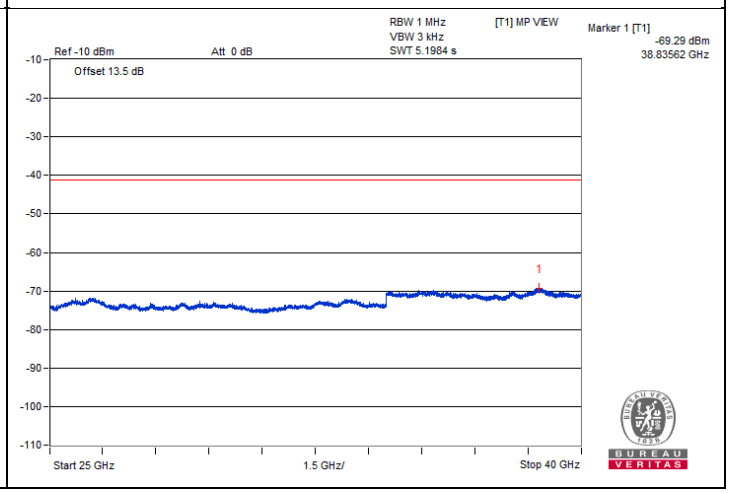
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.29 dBm
38.83562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5855.97	80.64 PK	88.2	-7.56	-19.38	4.76	-14.62
2	#5918.87	63.96 AV	68.2	-4.24	-36.06	4.76	-31.30

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

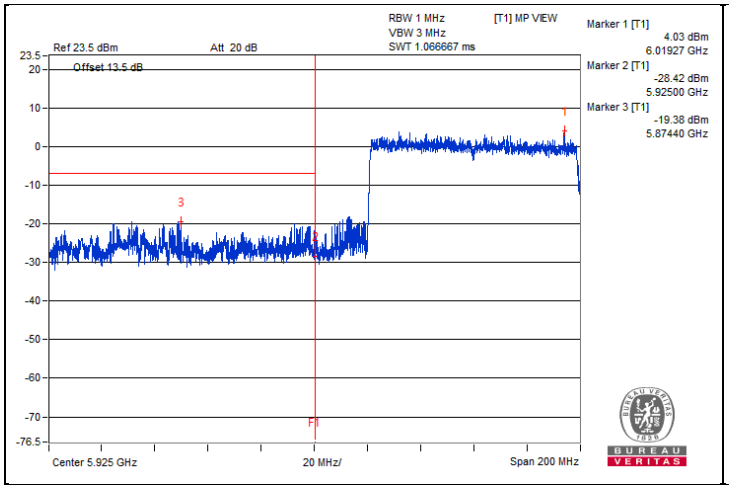

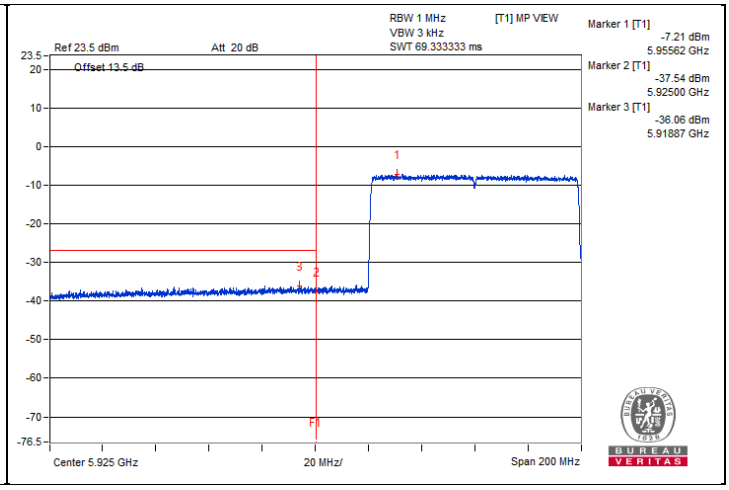

320 MHz Preamble 802.11be (RU996*3+484) - Channel 63

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	12535.93	52.15 PK	74	-21.85	-47.87	4.76	-43.11
2	12521.87	42.53 AV	54	-11.47	-57.49	4.76	-52.73
3	18788.56	44.33 PK	74	-29.67	-55.69	4.76	-50.93
4	18791.43	35.46 AV	54	-18.54	-64.56	4.76	-59.80

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

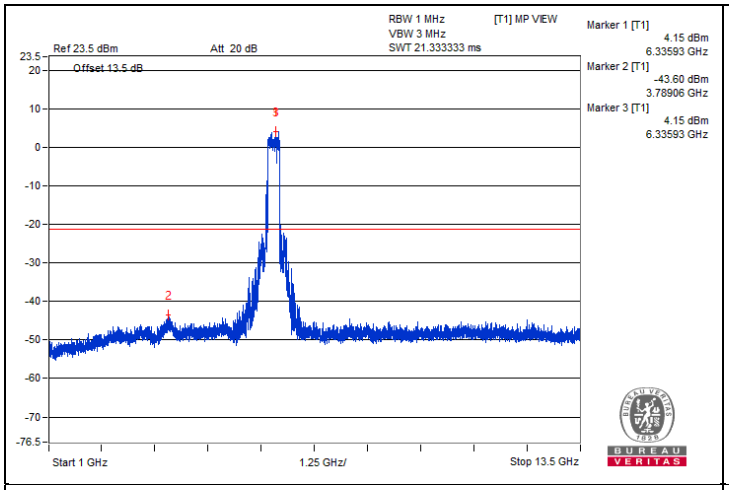
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.15 dBm
6.33593 GHz
Marker 2 [T1]
-43.60 dBm
3.78906 GHz
Marker 3 [T1]
4.15 dBm
6.33593 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

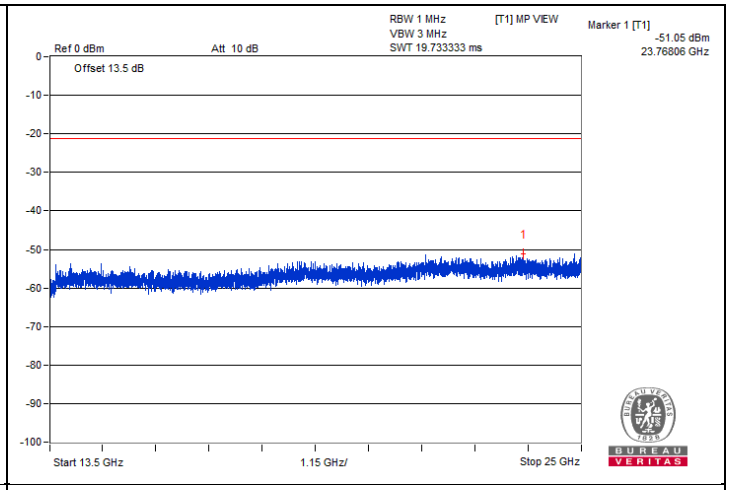
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.05 dBm
23.76806 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

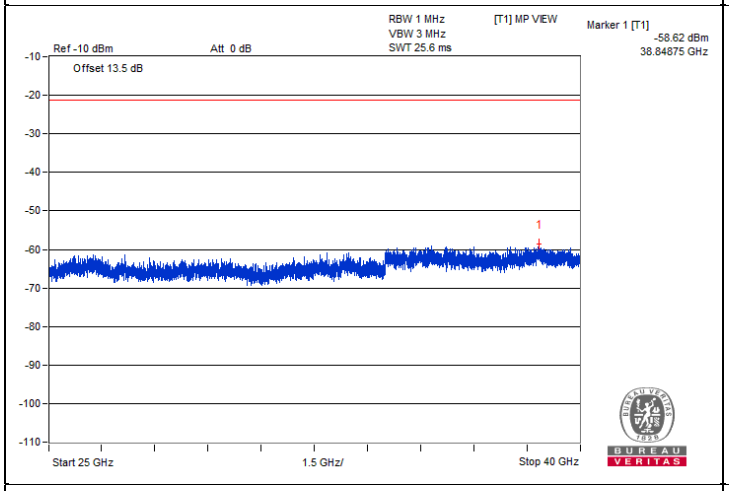
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.62 dBm
38.84875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

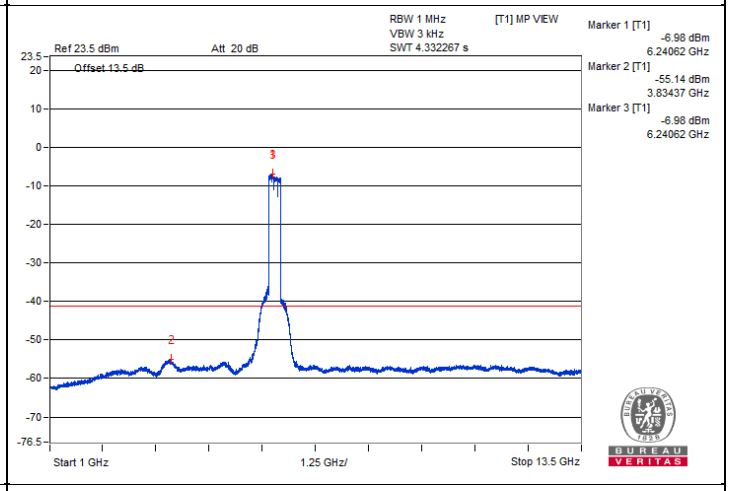
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.98 dBm
6.24062 GHz
Marker 2 [T1]
-55.14 dBm
3.83437 GHz
Marker 3 [T1]
-6.98 dBm
6.24062 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

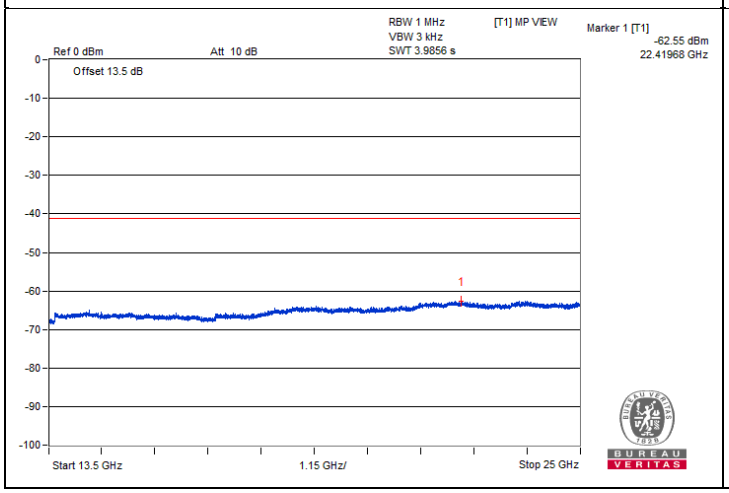
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.55 dBm
22.41968 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

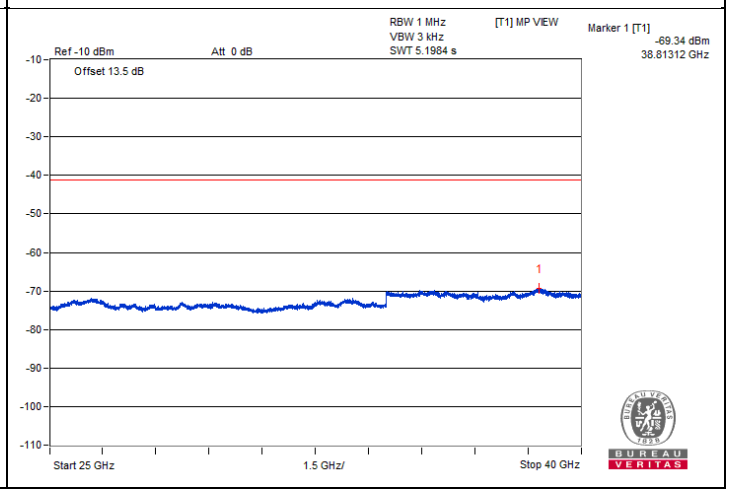
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.34 dBm
38.81312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

320 MHz Preamble 802.11be (RU996*3+484) - Channel 127

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13178.12	52.56 PK	88.2	-35.64	-47.46	4.76	-42.70
2	#13178.12	42.04 AV	68.2	-26.16	-57.98	4.76	-53.22
3	19751.68	45.76 PK	74	-28.24	-54.26	4.76	-49.50
4	19757.43	35.21 AV	54	-18.79	-64.81	4.76	-60.05

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

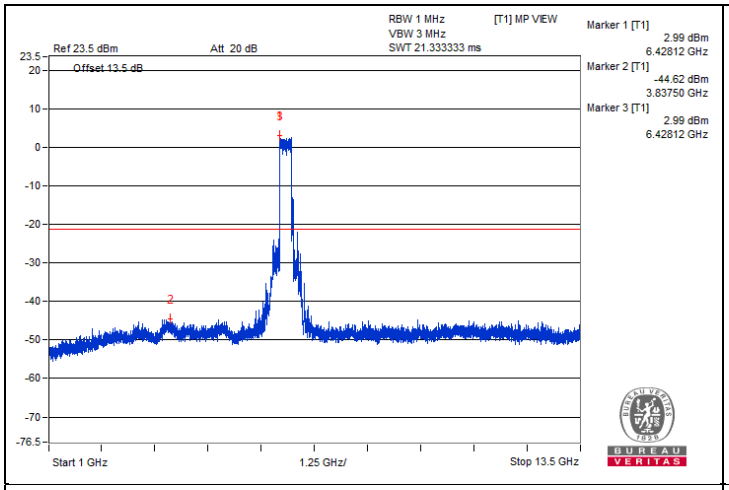
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
2.99 dBm
6.42812 GHz
Marker 2 [T1]
-44.62 dBm
3.83750 GHz
Marker 3 [T1]
2.99 dBm
6.42812 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

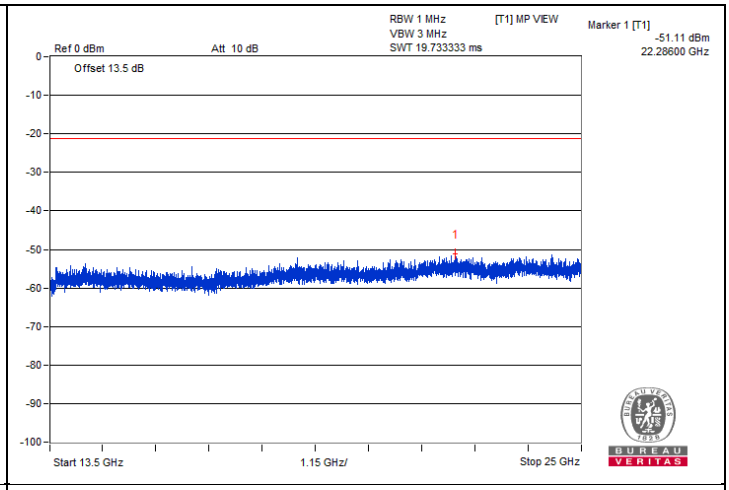
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.11 dBm
22.28600 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

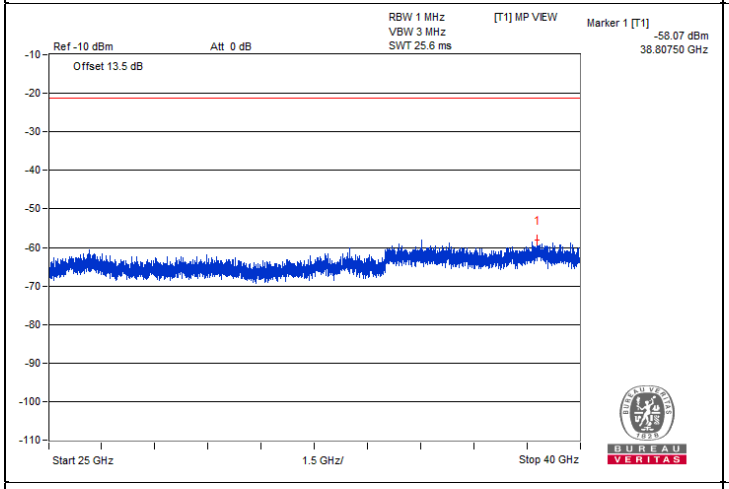
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.07 dBm
38.80750 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

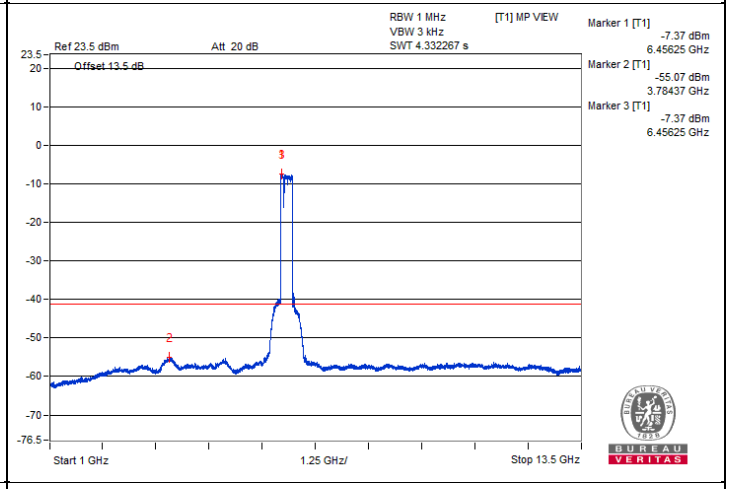
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-7.37 dBm
6.45625 GHz
Marker 2 [T1]
-55.07 dBm
3.78437 GHz
Marker 3 [T1]
-7.37 dBm
6.45625 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

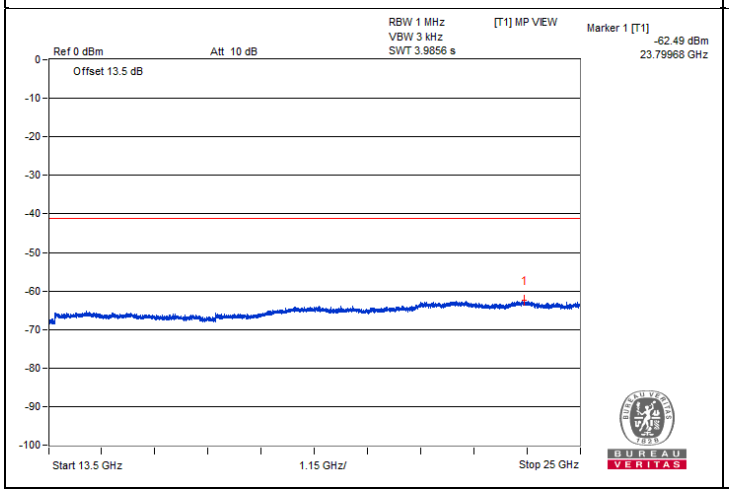
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.49 dBm
23.79968 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

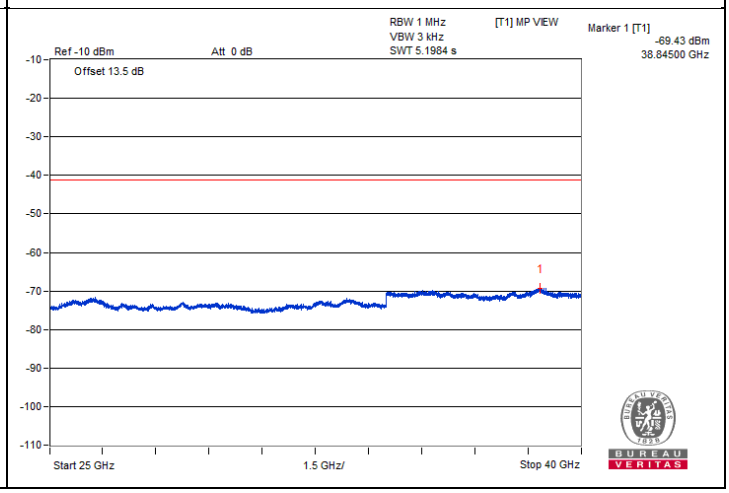
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.43 dBm
38.84500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

320 MHz Preamble 802.11be (RU996*3+484) - Channel 191

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#13804.75	44.62 PK	88.2	-43.58	-55.4	4.76	-50.64
2	#13804.75	33.69 AV	68.2	-34.51	-66.33	4.76	-61.57
3	20717.68	45.06 PK	74	-28.94	-54.96	4.76	-50.20
4	20709.06	35.52 AV	54	-18.48	-64.5	4.76	-59.74

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

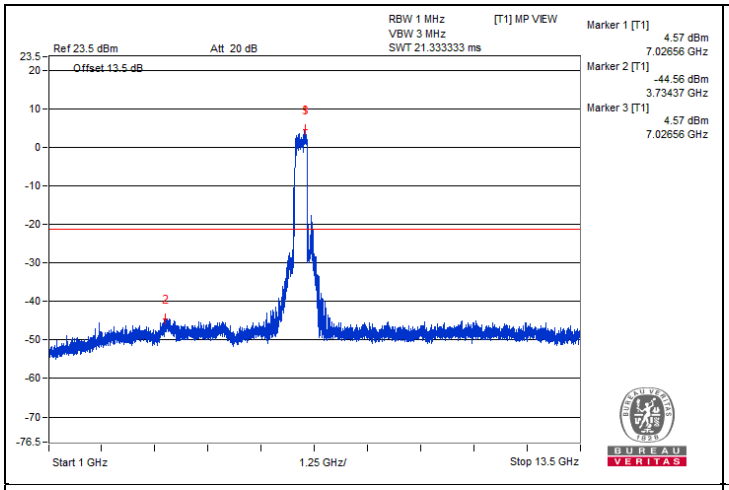
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
4.57 dBm
7.02656 GHz
Marker 2 [T1]
-44.56 dBm
3.73437 GHz
Marker 3 [T1]
4.57 dBm
7.02656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

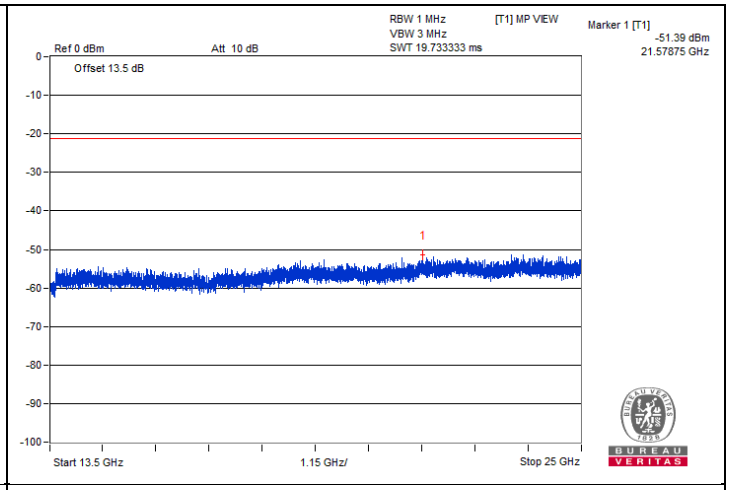
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.39 dBm
21.57875 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

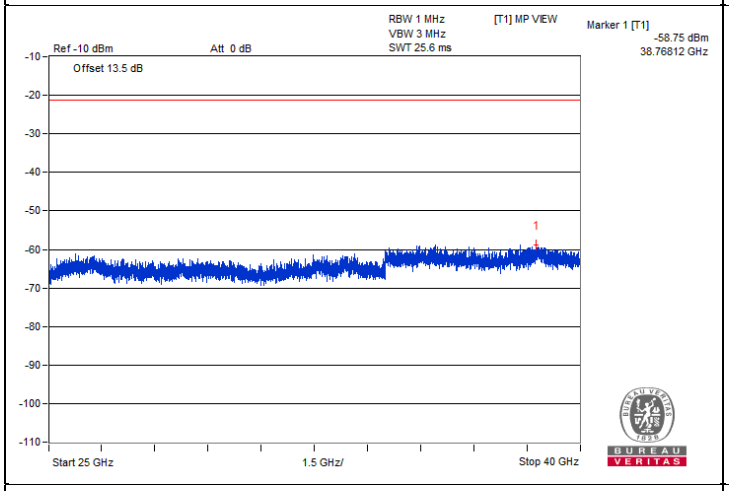
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.75 dBm
38.76812 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

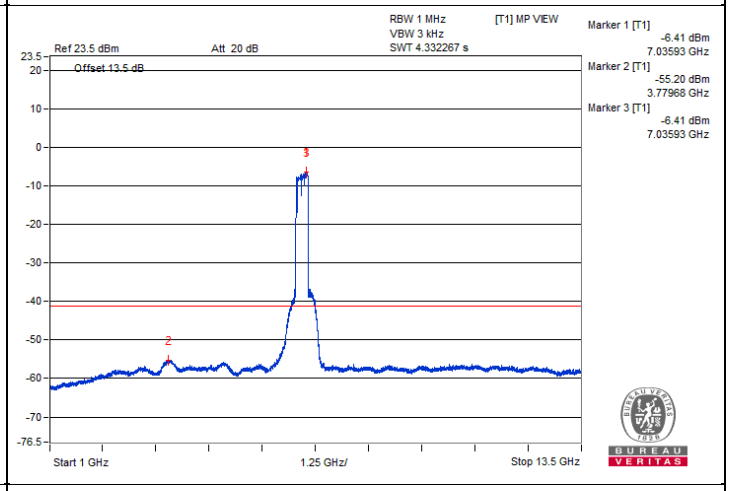
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 23.5 dBm
Att 20 dB
Offset 13.5 dB
Marker 1 [T1]
-6.41 dBm
7.03593 GHz
Marker 2 [T1]
-55.20 dBm
3.77968 GHz
Marker 3 [T1]
-6.41 dBm
7.03593 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

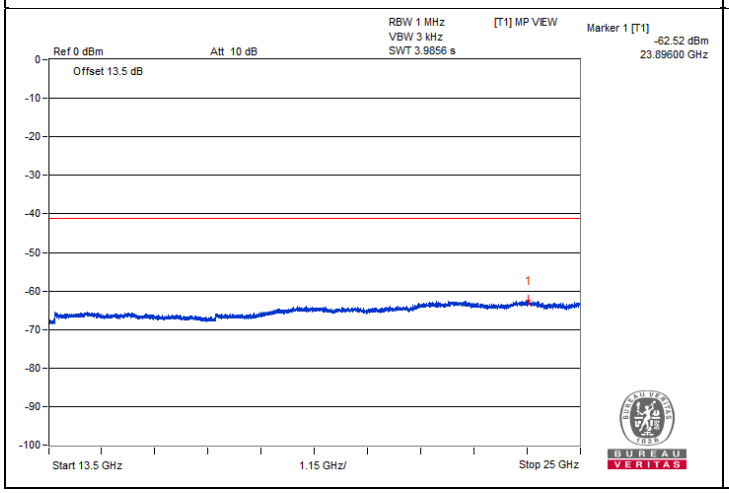
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.52 dBm
23.89600 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

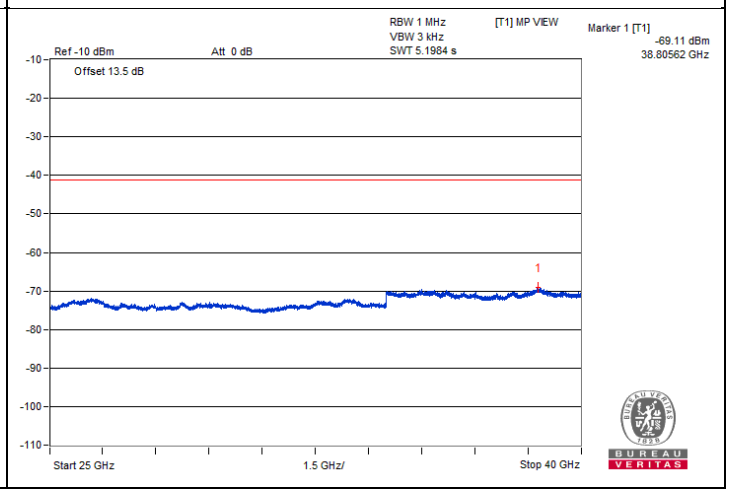
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref -10 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.11 dBm
38.80562 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7174.77	81 PK	88.2	-7.2	-18.35	4.09	-14.26
2	#7129.27	63.22 AV	68.2	-4.98	-36.13	4.09	-32.04

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

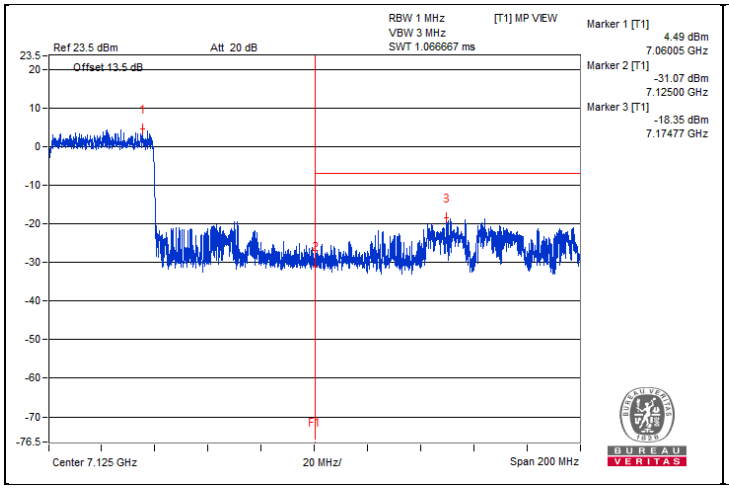

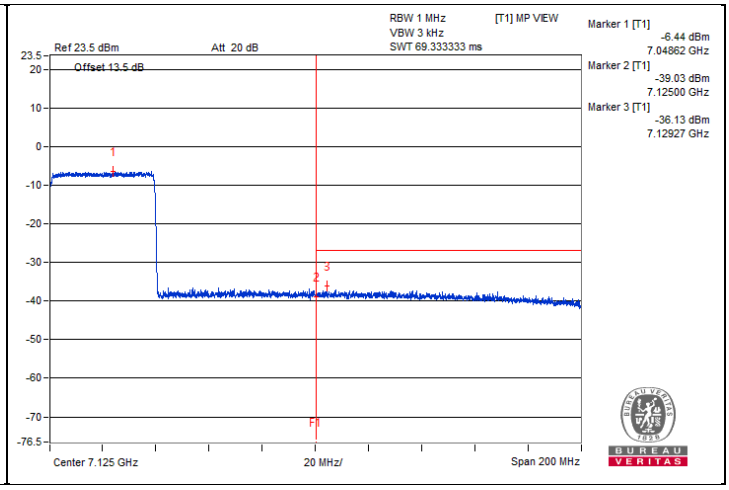

2T2S

20 MHz Preamble 802.11ax (RU26) - Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11917.18	45.5 PK	74	-28.5	-57.58	-57.49	4.76	-49.76
2	11900	35.68 AV	54	-18.32	-67.13	-67.58	4.76	-59.58
3	17855.62	46.11 PK	74	-27.89	-57.93	-56.1	4.76	-49.15
4	17857.06	36.7 AV	54	-17.3	-66	-66.69	4.76	-58.56

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

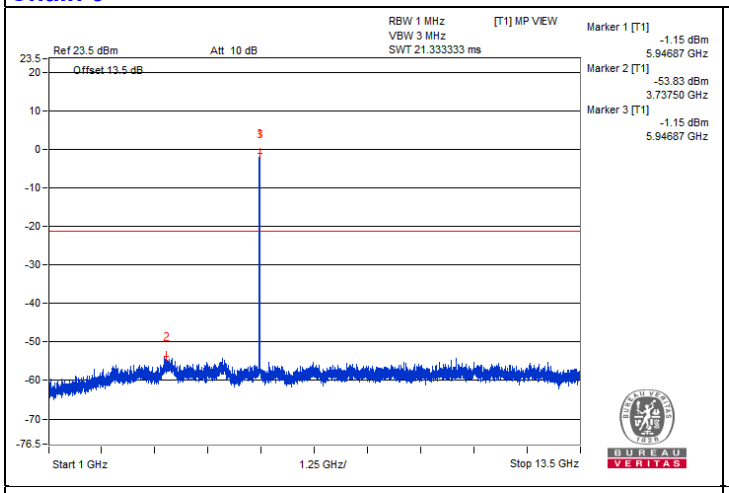
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-1.15 dBm
5.94687 GHz
Marker 2 [T1]
-53.83 dBm
3.73750 GHz
Marker 3 [T1]
-1.15 dBm
5.94687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

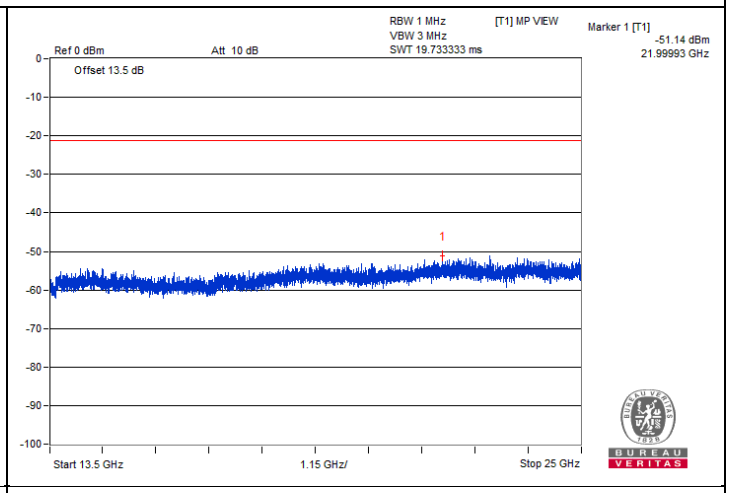
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.14 dBm
21.99993 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

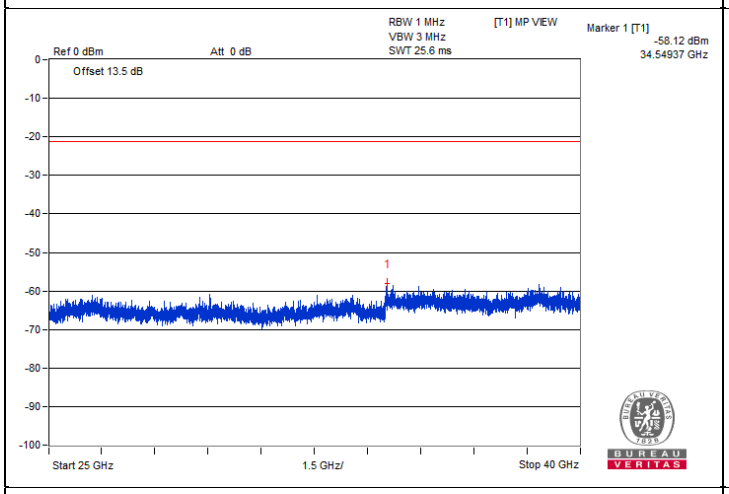
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.12 dBm
34.54937 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

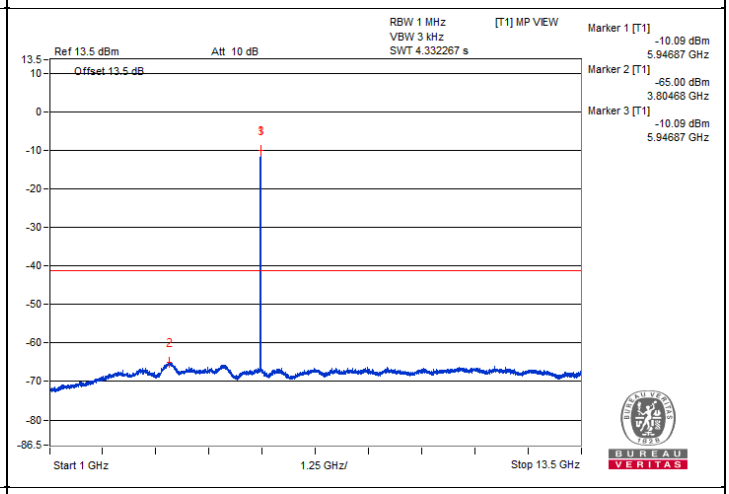
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-10.09 dBm
5.94687 GHz
Marker 2 [T1]
-65.00 dBm
3.80468 GHz
Marker 3 [T1]
-10.09 dBm
5.94687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

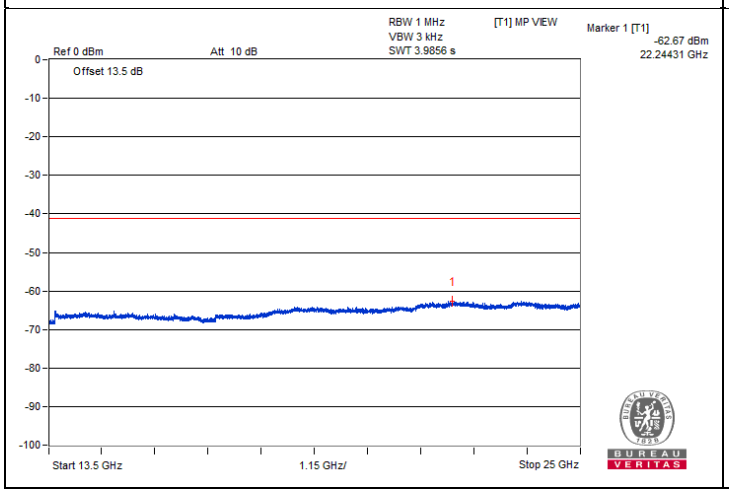
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.67 dBm
22.24431 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

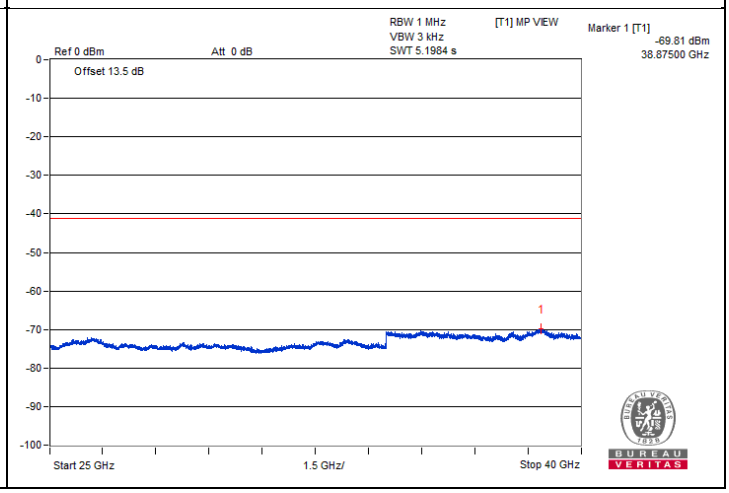
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.81 dBm
38.87500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Chain 1

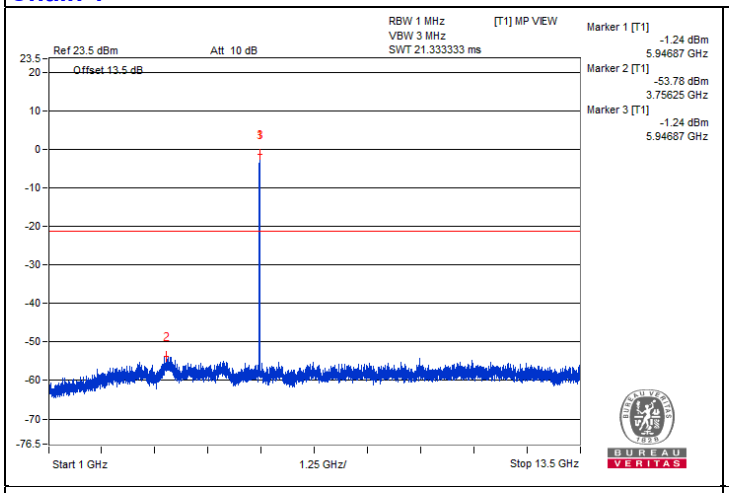
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-1.24 dBm
5.94687 GHz
Marker 2 [T1]
-53.78 dBm
3.75625 GHz
Marker 3 [T1]
-1.24 dBm
5.94687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

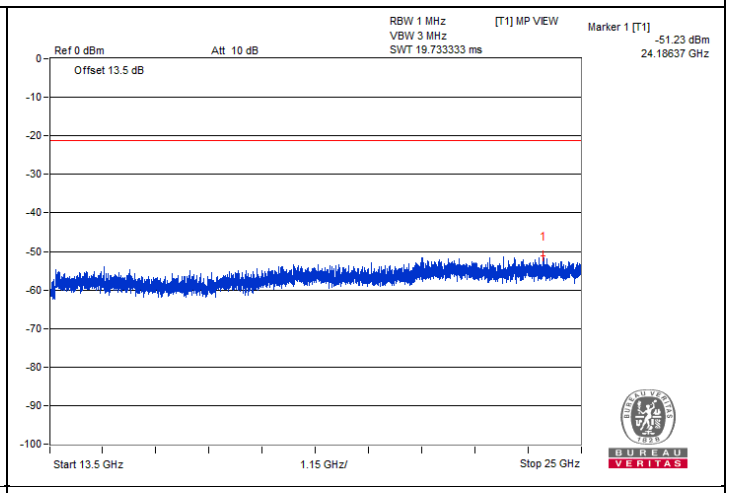
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.23 dBm
24.18637 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

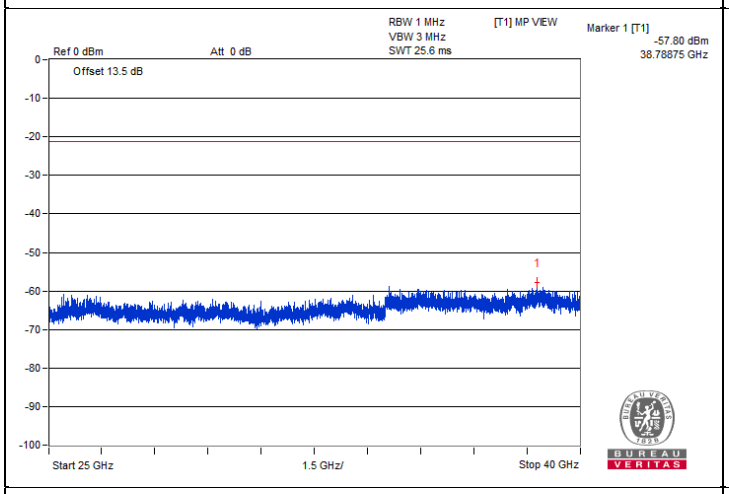
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-57.80 dBm
38.78875 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

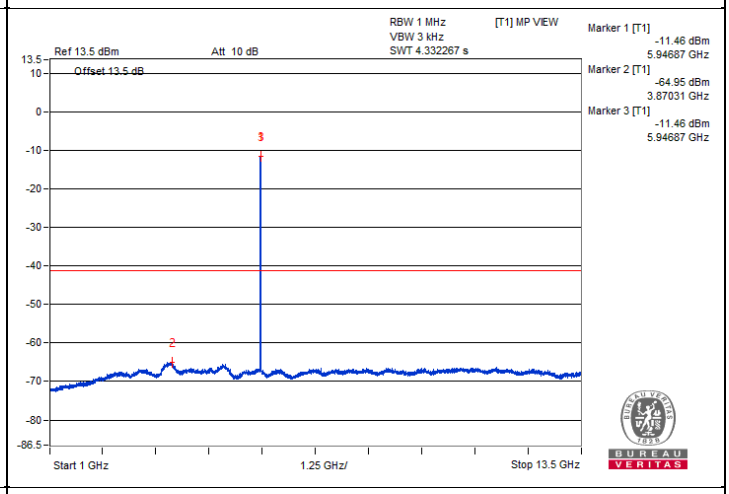
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-11.46 dBm
5.94687 GHz
Marker 2 [T1]
-64.95 dBm
3.87031 GHz
Marker 3 [T1]
-11.46 dBm
5.94687 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

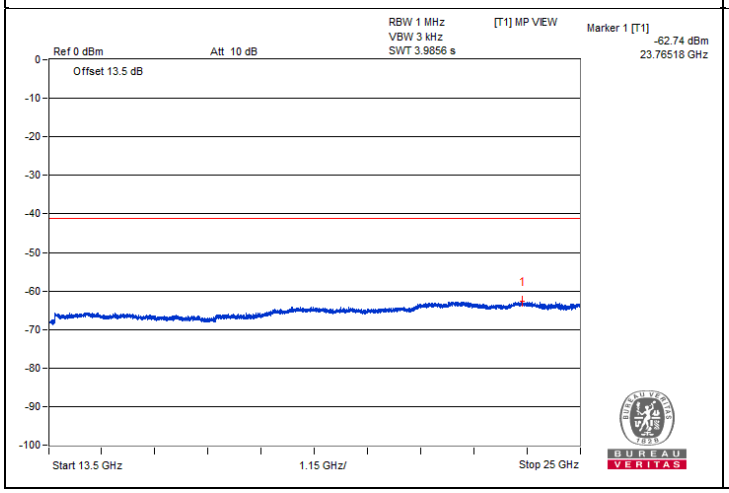
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.74 dBm
23.76518 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

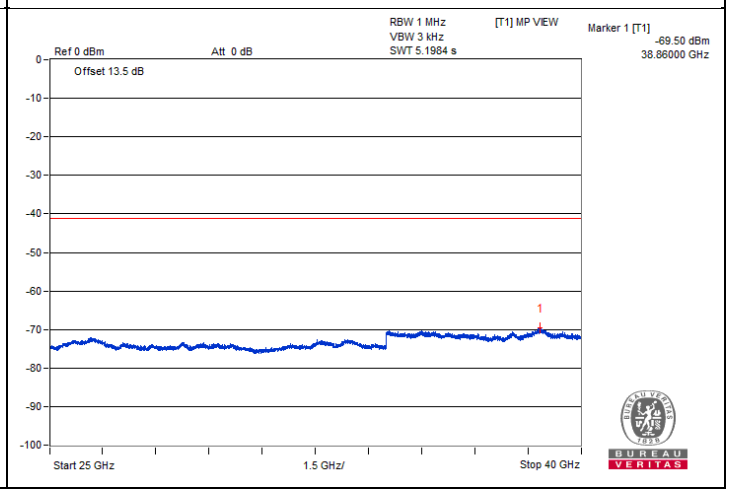
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.50 dBm
38.86000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5887.12	56.93 PK	88.2	-31.27	-45.2	-47.23	4.76	-38.33
2	#5857.15	46.26 AV	68.2	-21.94	-56.81	-56.74	4.76	-49.00

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

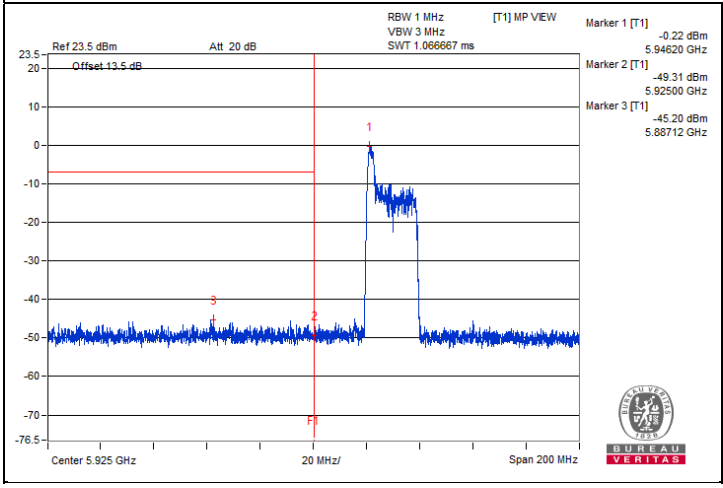

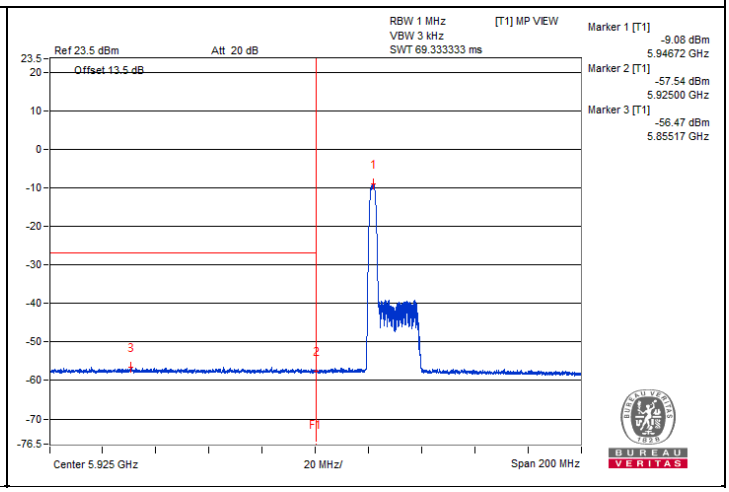

Chain 1

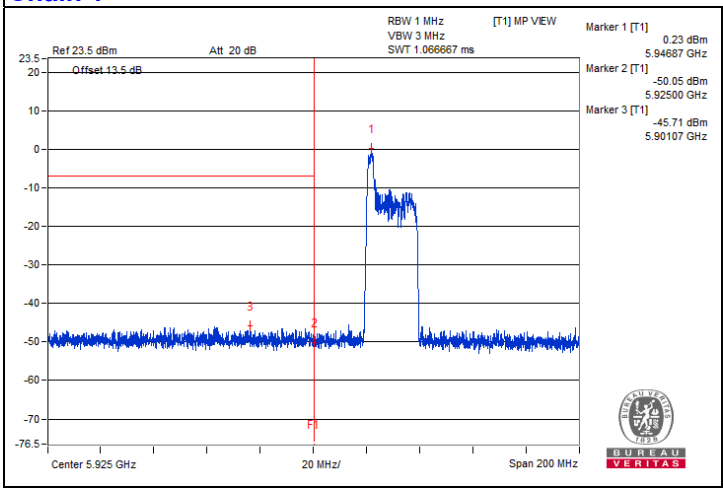

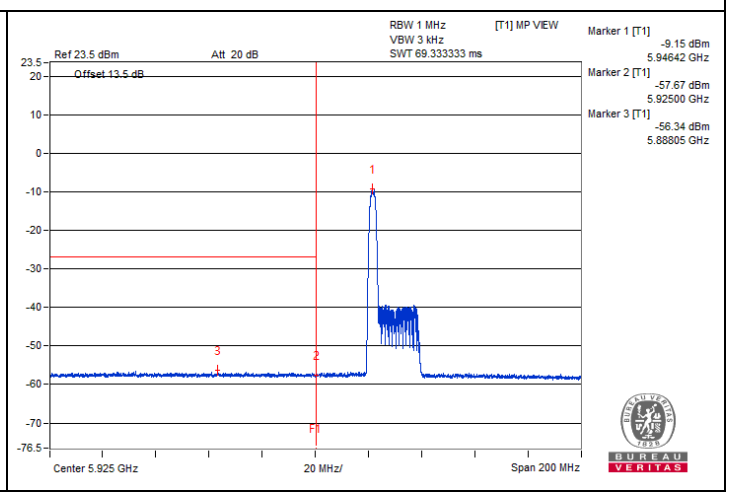

20 MHz Preamble 802.11ax (RU26) - Channel 45

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12350	45.53 PK	74	-28.47	-57.51	-57.49	4.76	-49.73
2	12351.56	35.98 AV	54	-18.02	-66.95	-67.16	4.76	-59.28
3	18516.87	47.81 PK	74	-26.19	-53.96	-57	4.76	-47.45
4	18521.18	37.78 AV	54	-16.22	-65.41	-65.1	4.76	-57.48

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

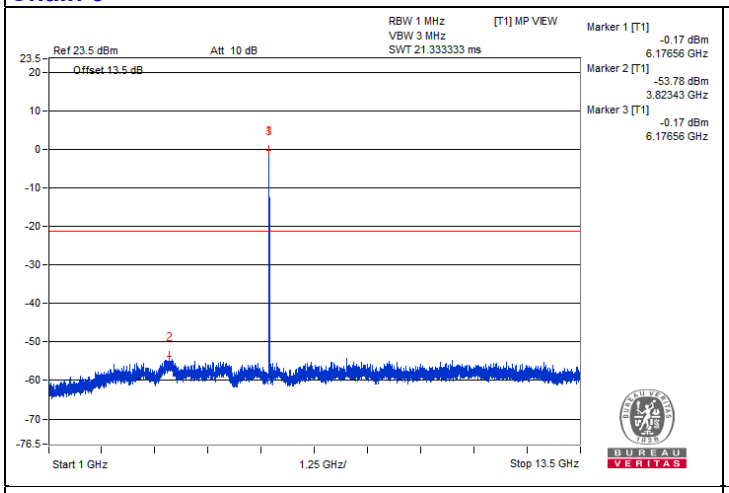
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-0.17 dBm
6.17656 GHz
Marker 2 [T1]
-53.78 dBm
3.82343 GHz
Marker 3 [T1]
-0.17 dBm
6.17656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

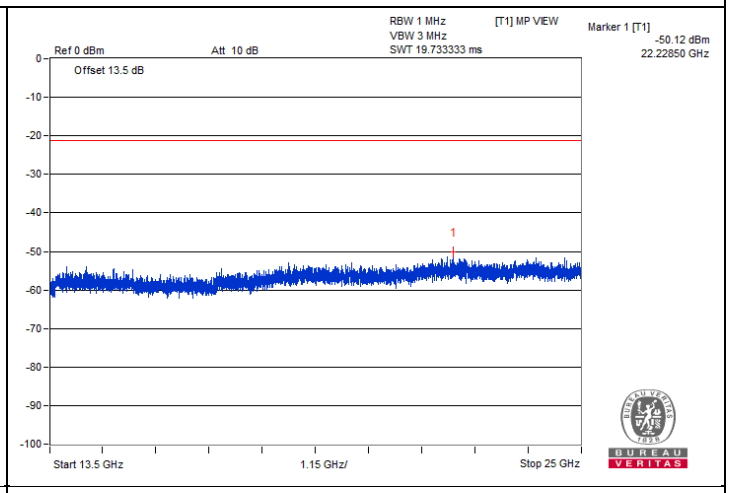
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.12 dBm
22.22850 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

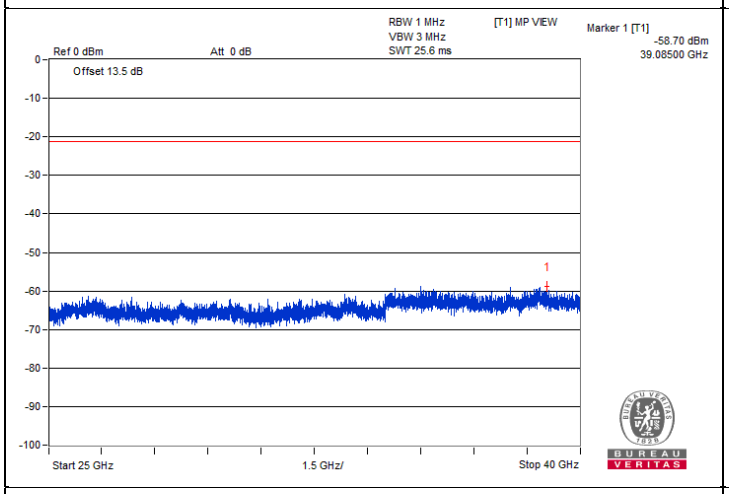
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.70 dBm
39.08500 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

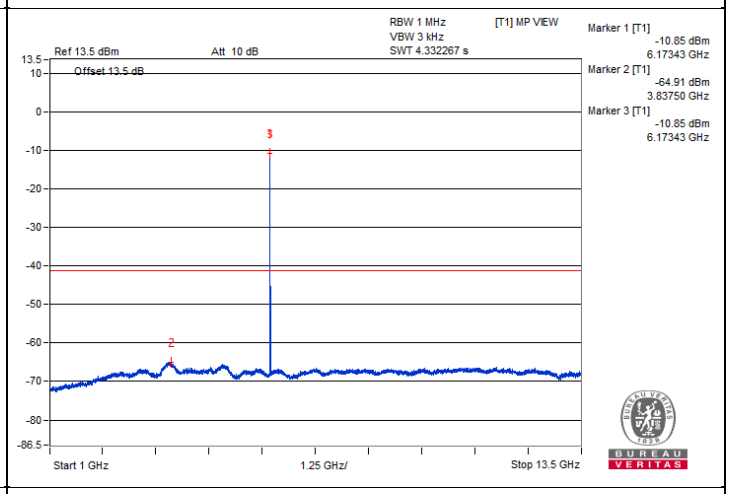
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-10.85 dBm
6.17343 GHz
Marker 2 [T1]
-64.91 dBm
3.83750 GHz
Marker 3 [T1]
-10.85 dBm
6.17343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

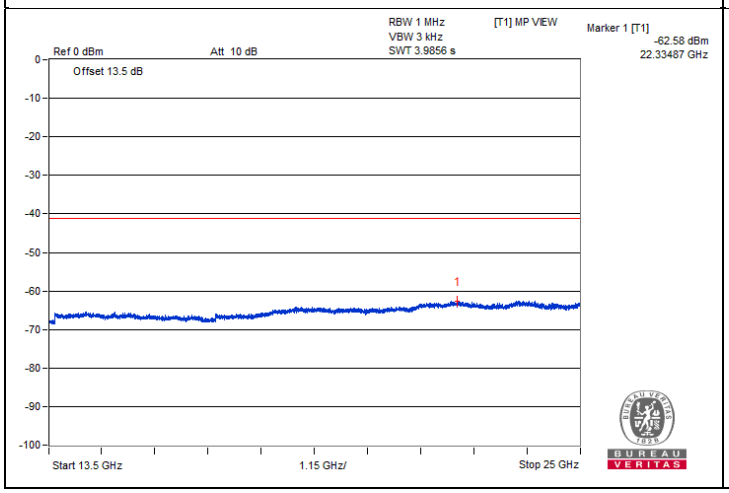
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.58 dBm
22.33487 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

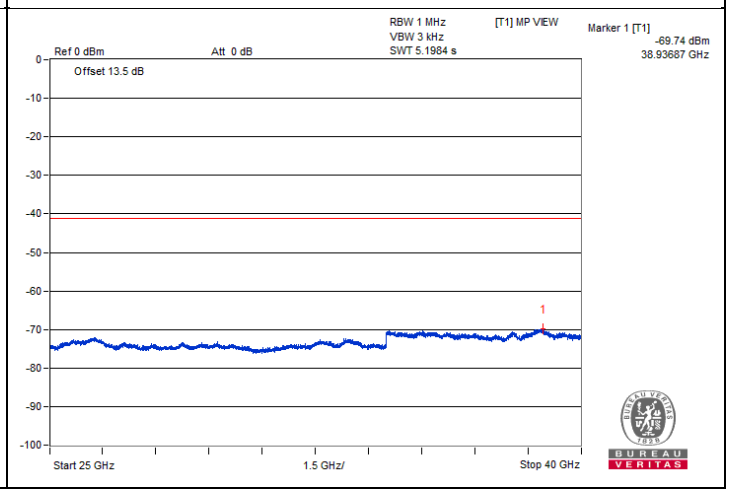
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.74 dBm
38.93687 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Chain 1

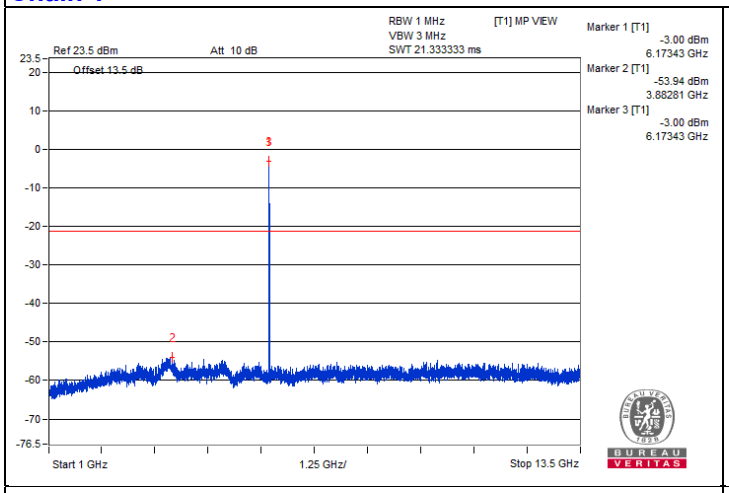
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-3.00 dBm
6.17343 GHz
Marker 2 [T1]
-53.94 dBm
3.88281 GHz
Marker 3 [T1]
-3.00 dBm
6.17343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

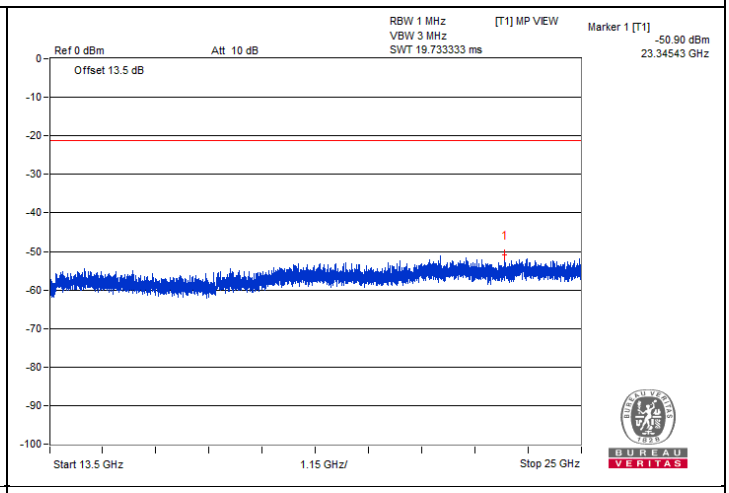
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.90 dBm
23.34543 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

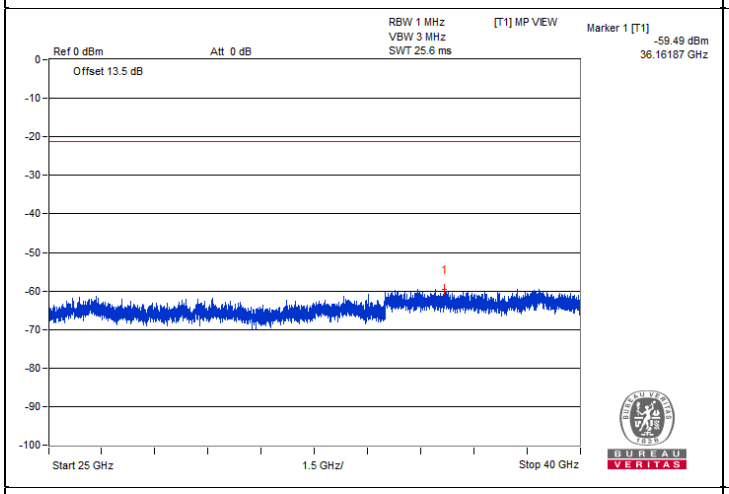
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-59.49 dBm
36.16187 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

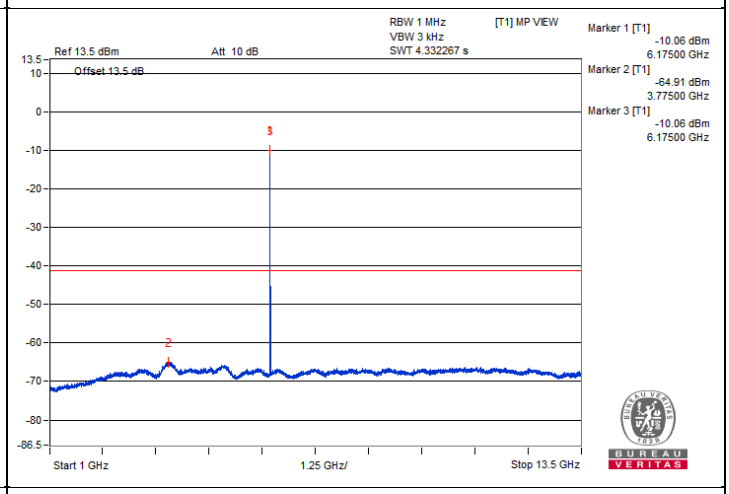
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-10.06 dBm
6.17500 GHz
Marker 2 [T1]
-64.91 dBm
3.77500 GHz
Marker 3 [T1]
-10.06 dBm
6.17500 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

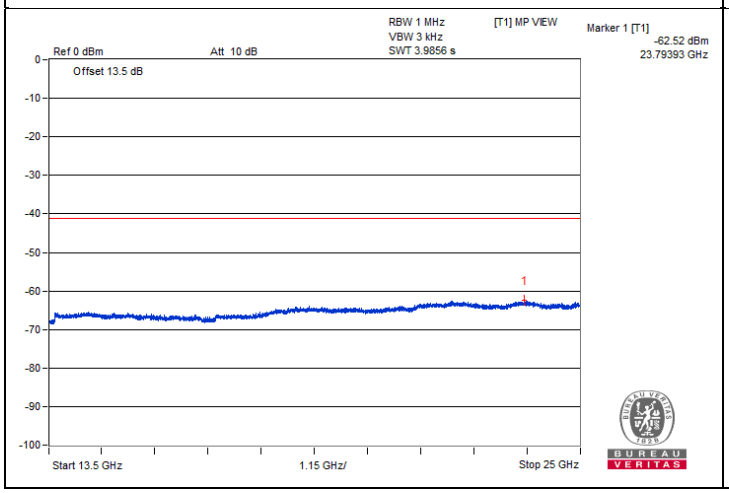
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.52 dBm
23.79393 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

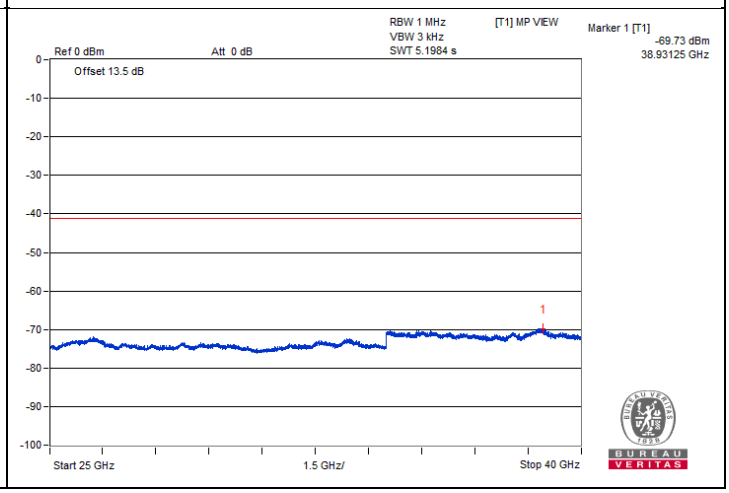
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.73 dBm
38.93125 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 93

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12829.68	45.83 PK	88.2	-42.37	-56.31	-58.32	4.76	-49.43
2	#12828.12	35.27 AV	68.2	-32.93	-68.22	-67.34	4.76	-59.99
3	19241.37	48.46 PK	74	-25.54	-53.57	-55.87	4.76	-46.80
4	19250	38.42 AV	54	-15.58	-64.89	-64.35	4.76	-56.84

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

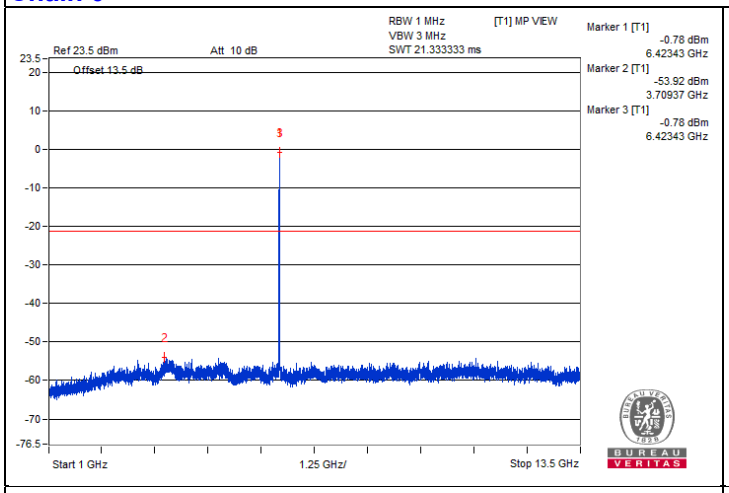
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-0.78 dBm
6.42343 GHz
Marker 2 [T1]
-53.92 dBm
3.70937 GHz
Marker 3 [T1]
-0.78 dBm
6.42343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

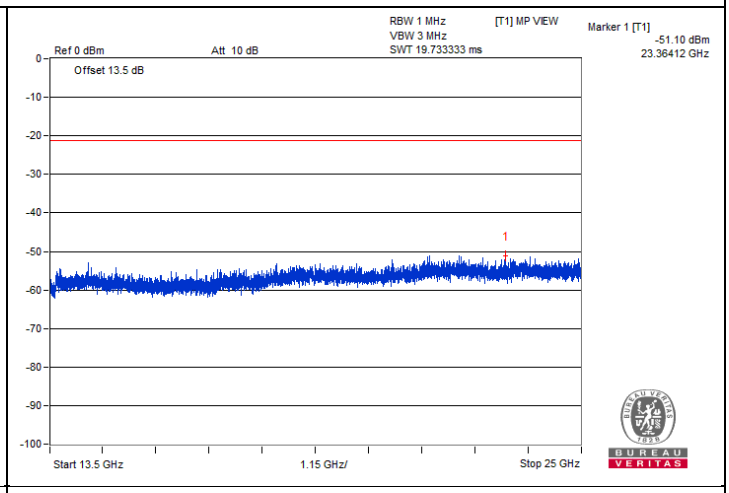
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.10 dBm
23.36412 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

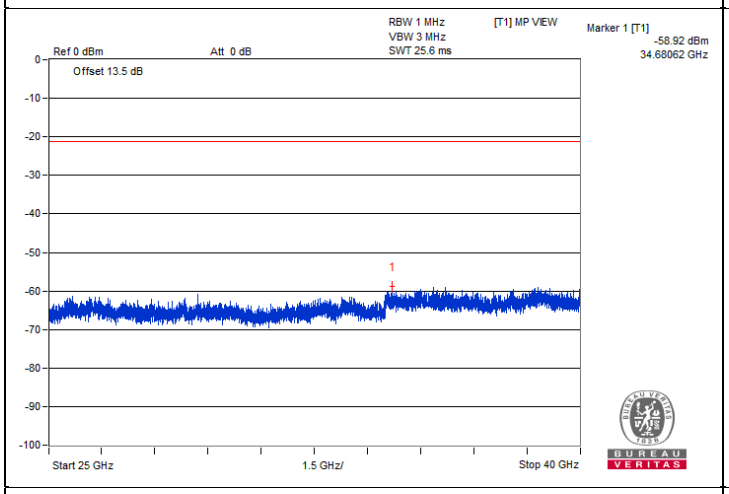
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.92 dBm
34.68062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

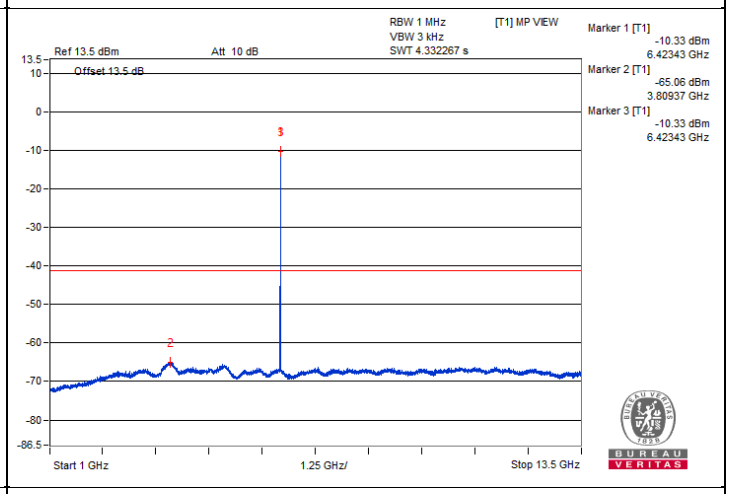
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-10.33 dBm
6.42343 GHz
Marker 2 [T1]
-65.06 dBm
3.80937 GHz
Marker 3 [T1]
-10.33 dBm
6.42343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

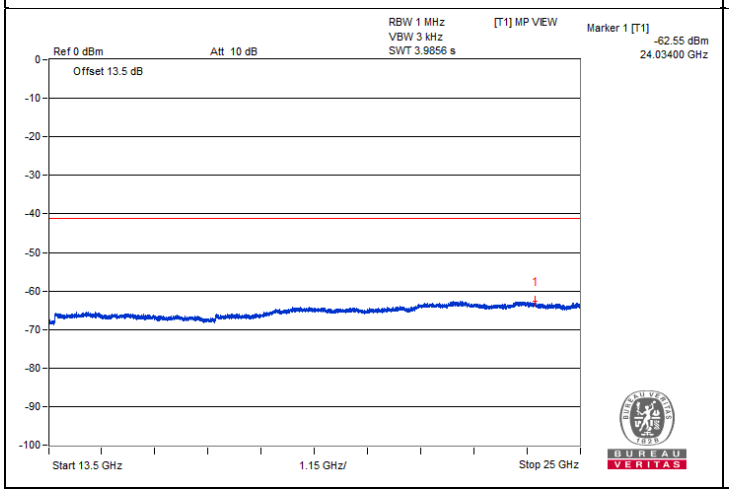
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.55 dBm
24.03400 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

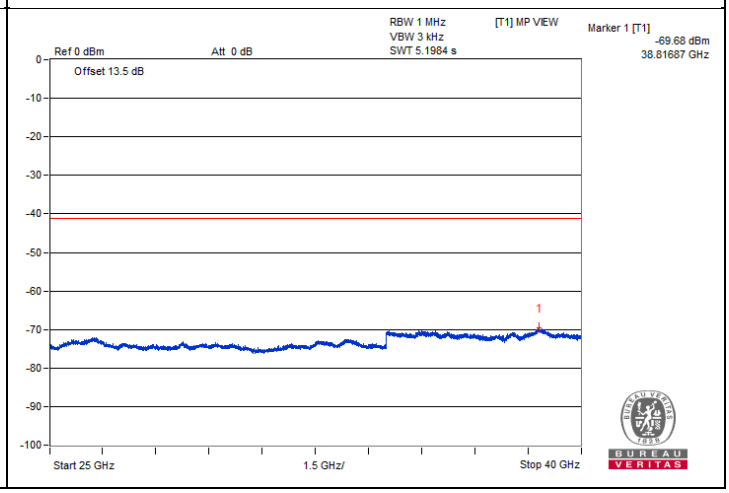
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.68 dBm
38.81687 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

Chain 1

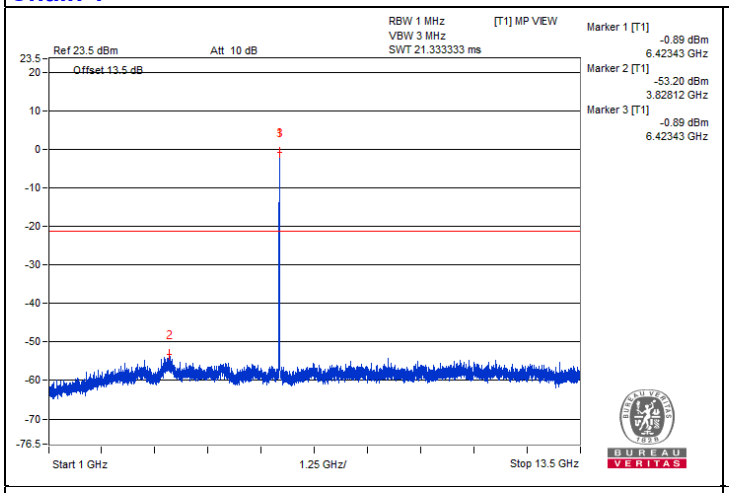
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-0.89 dBm
6.42343 GHz
Marker 2 [T1]
-53.20 dBm
3.82812 GHz
Marker 3 [T1]
-0.89 dBm
6.42343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

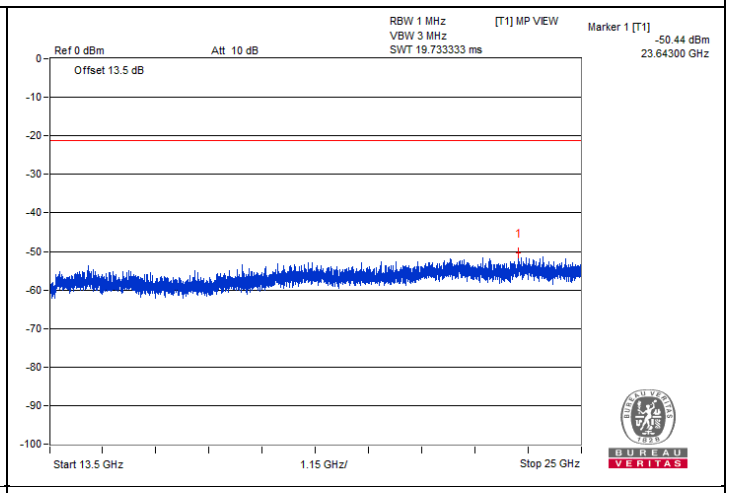
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-50.44 dBm
23.64300 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

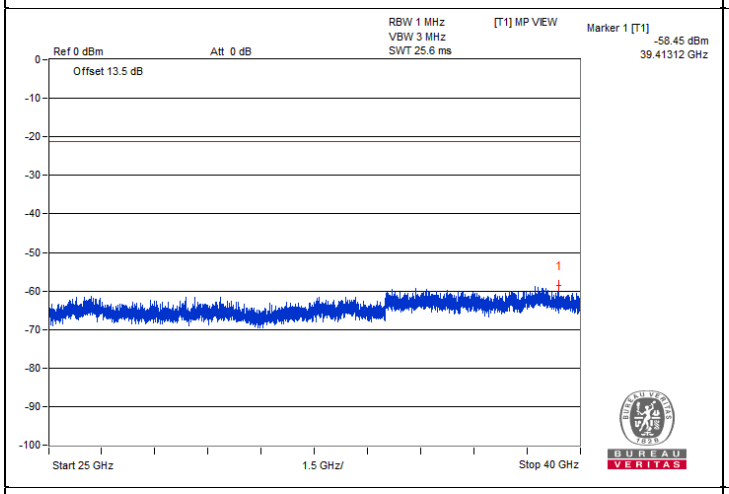
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.45 dBm
39.41312 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

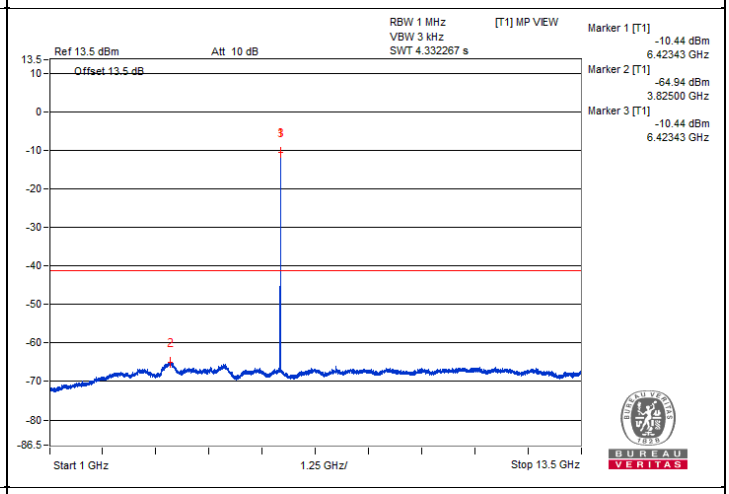
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-10.44 dBm
6.42343 GHz
Marker 2 [T1]
-64.94 dBm
3.82500 GHz
Marker 3 [T1]
-10.44 dBm
6.42343 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

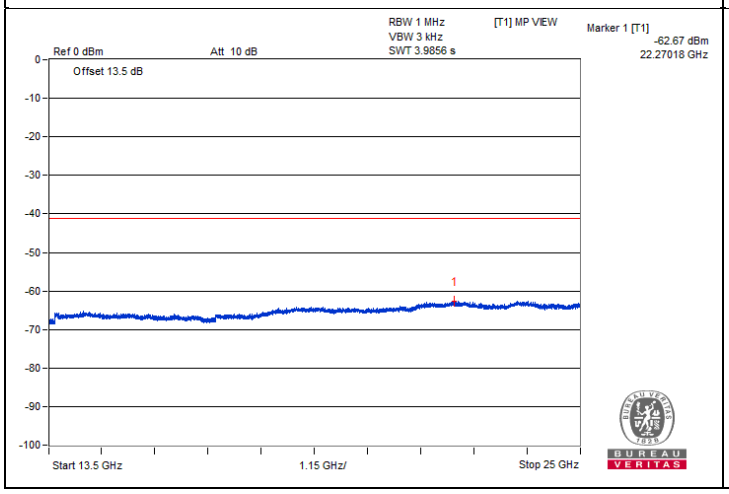
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.67 dBm
22.27018 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

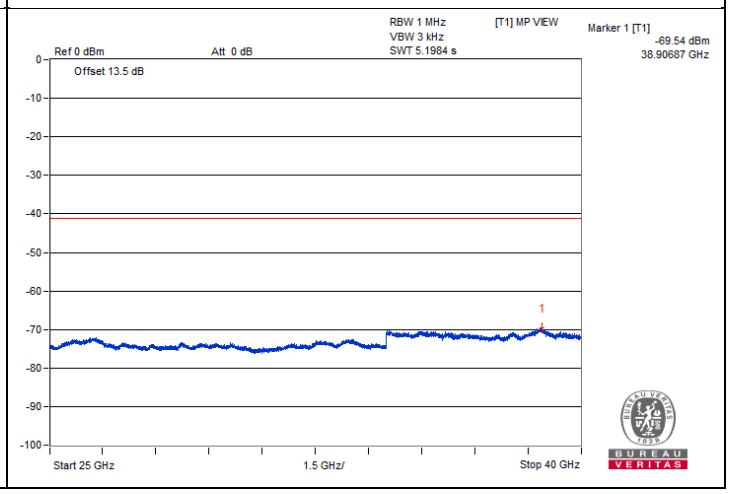
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.54 dBm
38.90687 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

20 MHz Preamble 802.11ax (RU26) - Channel 97

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12873.43	45.49 PK	88.2	-42.71	-58.74	-56.6	4.76	-49.77
2	#12875	34.72 AV	68.2	-33.48	-68.45	-68.17	4.76	-60.54
3	19301.75	47.72 PK	74	-26.28	-56.52	-54.37	4.76	-47.54
4	19314.68	38.45 AV	54	-15.55	-64.47	-64.7	4.76	-56.81

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

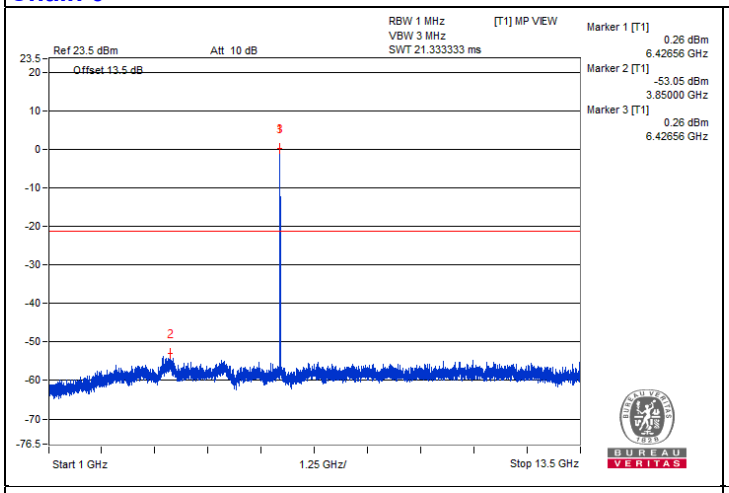
RBW 1 MHz
VBW 3 MHz
SWT 21.333333 ms
[T1] MP VIEW
Ref 23.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
0.26 dBm
6.42656 GHz
Marker 2 [T1]
-53.05 dBm
3.85000 GHz
Marker 3 [T1]
0.26 dBm
6.42656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

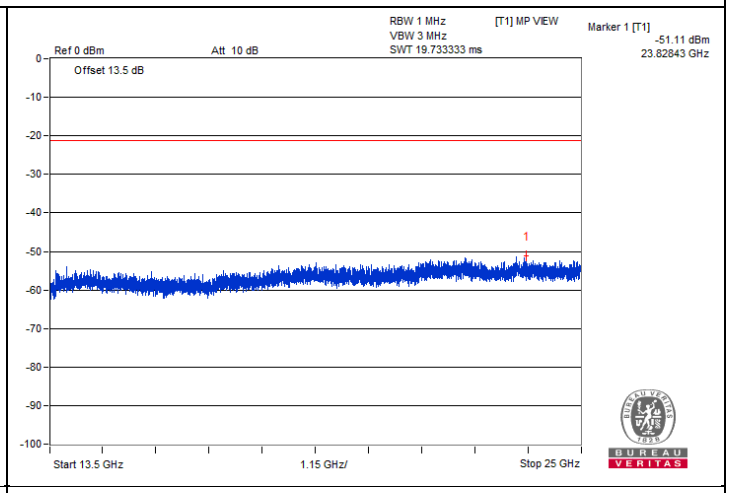
RBW 1 MHz
VBW 3 MHz
SWT 19.733333 ms
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-51.11 dBm
23.82843 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

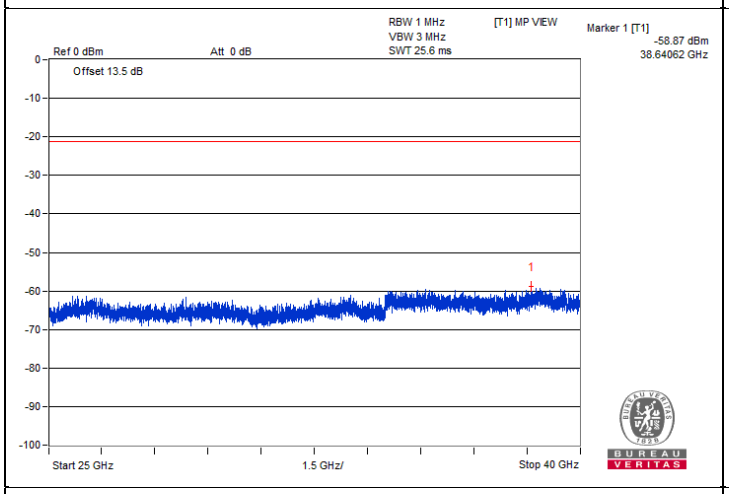
RBW 1 MHz
VBW 3 MHz
SWT 25.6 ms
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-58.87 dBm
38.64062 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz

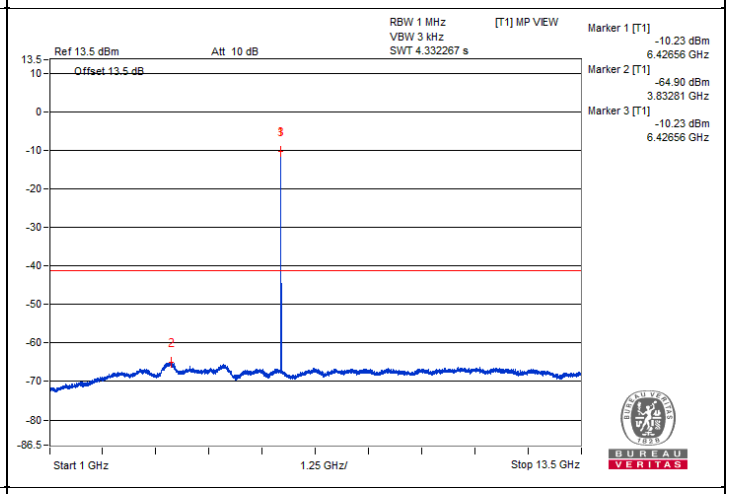
RBW 1 MHz
VBW 3 kHz
SWT 4.332267 s
[T1] MP VIEW
Ref 13.5 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-10.23 dBm
6.42656 GHz
Marker 2 [T1]
-64.90 dBm
3.83281 GHz
Marker 3 [T1]
-10.23 dBm
6.42656 GHz
Start 1 GHz
1.25 GHz/
Stop 13.5 GHz

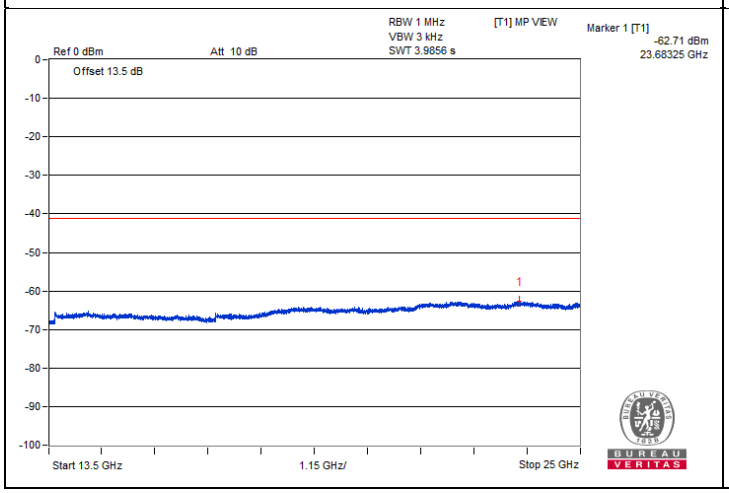
RBW 1 MHz
VBW 3 kHz
SWT 3.9856 s
[T1] MP VIEW
Ref 0 dBm
Att 10 dB
Offset 13.5 dB
Marker 1 [T1]
-62.71 dBm
23.68325 GHz
Start 13.5 GHz
1.15 GHz/
Stop 25 GHz

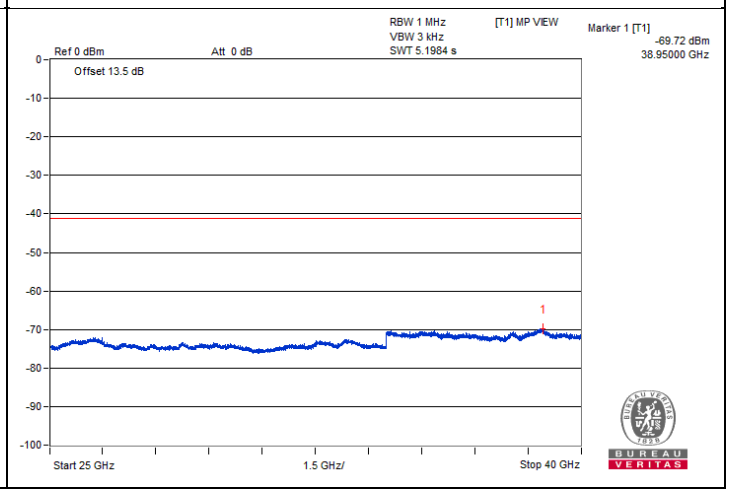
RBW 1 MHz
VBW 3 kHz
SWT 5.1984 s
[T1] MP VIEW
Ref 0 dBm
Att 0 dB
Offset 13.5 dB
Marker 1 [T1]
-69.72 dBm
38.95000 GHz
Start 25 GHz
1.5 GHz/
Stop 40 GHz