


5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5270MHz_TX

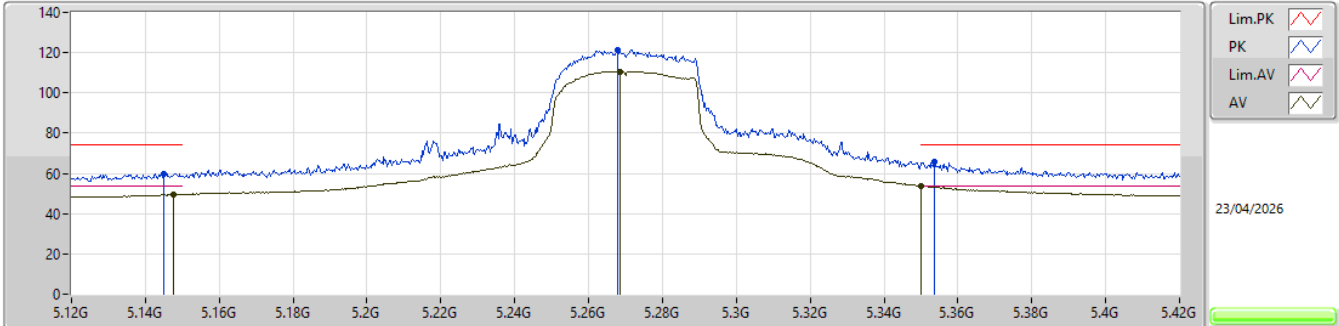


EUT_Y_4TX
Setting 29
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1449G	59.93	74.00	-14.07	53.72	3	Horizontal	342.8	1.80	-	33.09	8.23	35.11			
AV	5.1476G	49.59	54.00	-4.41	43.37	3	Horizontal	342.8	1.80	-	33.10	8.23	35.11			
PK	5.2679G	121.20	Inf	-Inf	114.99	3	Horizontal	342.8	1.80	-	32.96	8.31	35.06			
AV	5.2685G	110.67	Inf	-Inf	104.46	3	Horizontal	342.8	1.80	-	32.96	8.31	35.06			
PK	5.3537G	65.60	74.00	-8.40	59.35	3	Horizontal	342.8	1.80	-	32.90	8.38	35.03			
AV	5.35G	53.84	54.00	-0.16	47.59	3	Horizontal	342.8	1.80	-	32.90	8.38	35.03			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5270MHz_TX

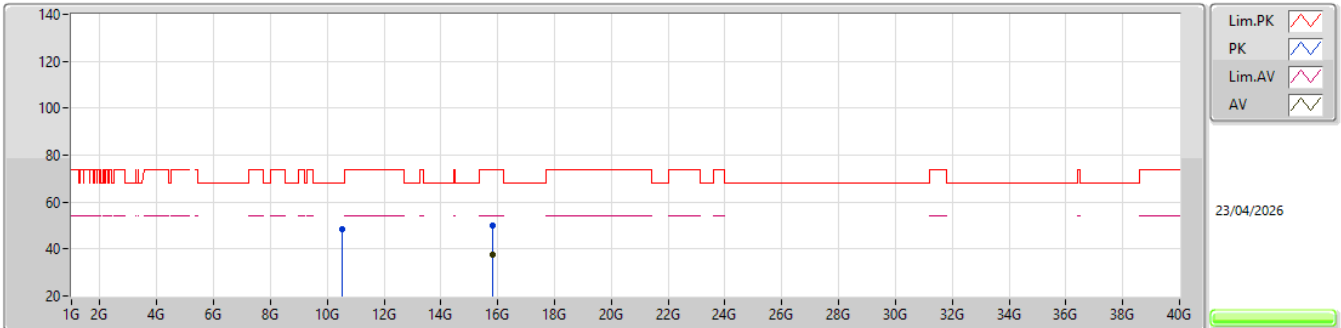


EUT_Y_4TX
Setting 29
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.53802G	48.41	68.20	-19.79	40.97	3	Vertical	233	2.74	-	38.60	14.22	45.38			
PK	15.80541G	50.04	74.00	-23.96	40.69	3	Vertical	10	1.40	-	37.49	15.37	43.51			
AV	15.81493G	37.38	54.00	-16.62	28.07	3	Vertical	10	1.40	-	37.47	15.37	43.53			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5270MHz_TX

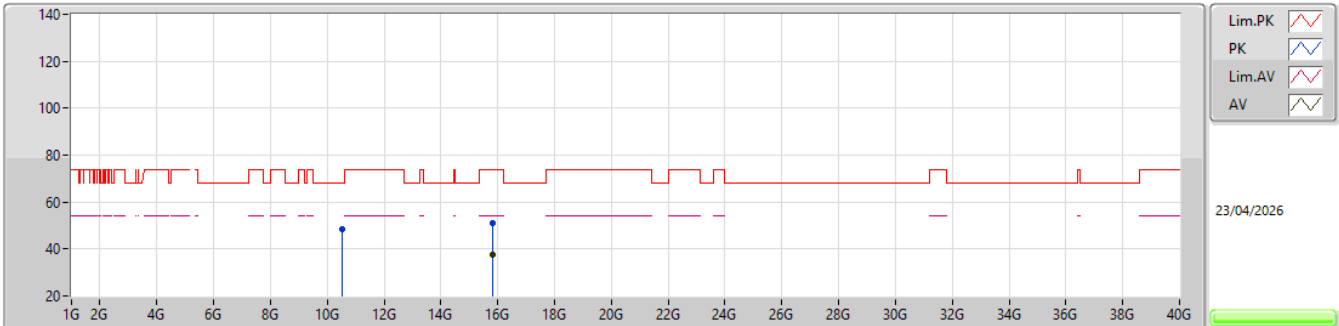
EUT_Y_4TX
Setting 29
01-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.53534G	48.67	68.20	-19.53	41.24	3	Horizontal	239	2.96	-	38.60	14.21	45.38				
PK	15.81408G	50.90	74.00	-23.10	41.58	3	Horizontal	81	1.96	-	37.47	15.37	43.52				
AV	15.81483G	37.45	54.00	-16.55	28.13	3	Horizontal	81	1.96	-	37.47	15.37	43.52				

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5310MHz_TX

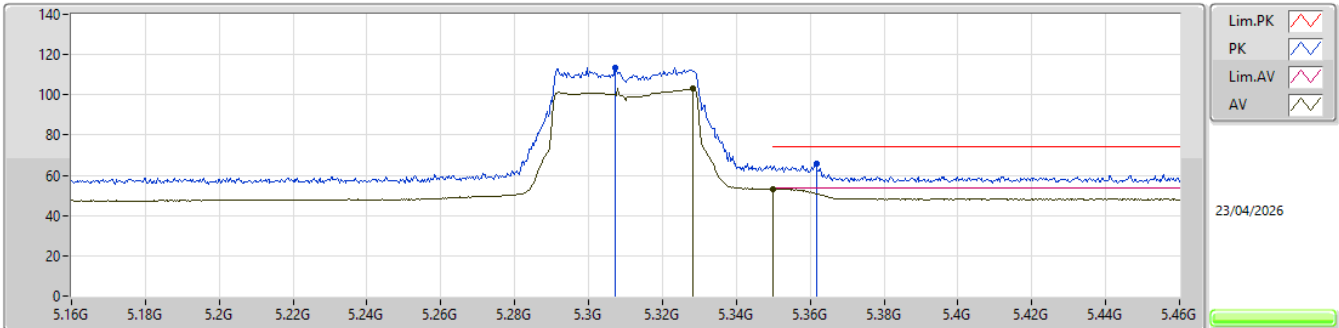


EUT Y_4TX
Setting 20
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3073G	113.47	Inf	-Inf	107.28	3	Vertical	360	3.00	-	32.90	8.34	35.05			
AV	5.3283G	103.02	Inf	-Inf	96.80	3	Vertical	360	3.00	-	32.90	8.36	35.04			
PK	5.3616G	66.06	74.00	-7.94	59.80	3	Vertical	360	3.00	-	32.90	8.39	35.03			
AV	5.35G	53.19	54.00	-0.81	46.94	3	Vertical	360	3.00	-	32.90	8.38	35.03			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5310MHz_TX

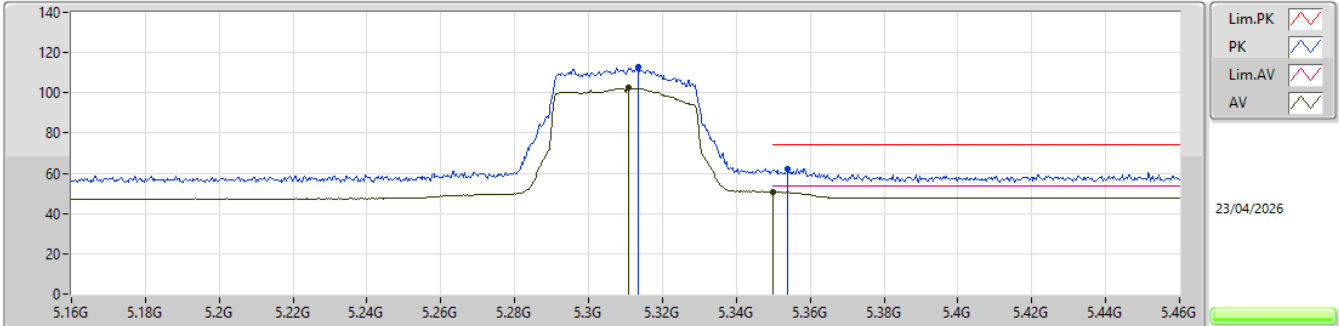


EUT Y_4TX
Setting 20
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3133G	112.94	Inf	-Inf	106.74	3	Horizontal	320	1.80	-	32.90	8.35	35.05			
AV	5.3109G	102.53	Inf	-Inf	96.34	3	Horizontal	320	1.80	-	32.90	8.34	35.05			
PK	5.3538G	62.10	74.00	-11.90	55.85	3	Horizontal	320	1.80	-	32.90	8.38	35.03			
AV	5.35G	50.88	54.00	-3.12	44.63	3	Horizontal	320	1.80	-	32.90	8.38	35.03			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5310MHz_TX

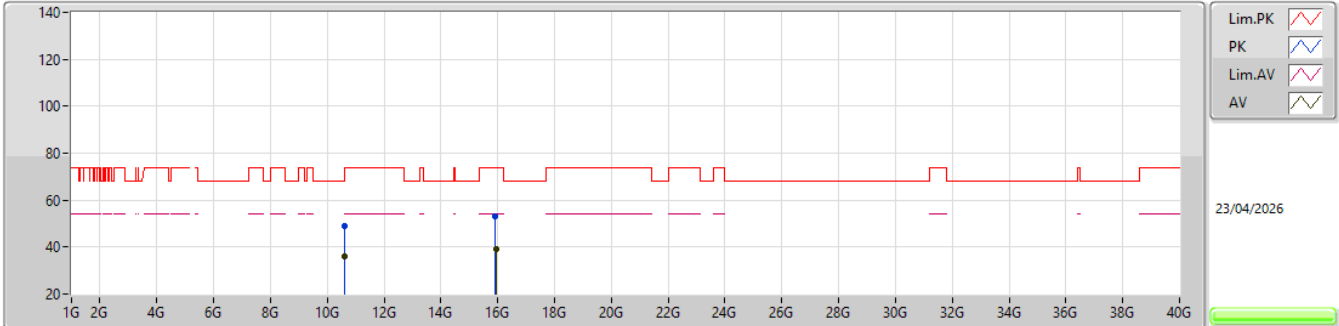


EUT_Y_4TX
Setting 20
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.62286G	49.11	74.00	-24.89	41.34	3	Vertical	215	1.72	-	39.05	14.26	45.54			
AV	10.62111G	36.02	54.00	-17.98	28.26	3	Vertical	215	1.72	-	39.04	14.26	45.54			
PK	15.92665G	53.18	74.00	-20.82	43.91	3	Vertical	151	1.78	-	37.65	15.38	43.76			
AV	15.93044G	39.31	54.00	-14.69	30.06	3	Vertical	151	1.78	-	37.64	15.38	43.77			

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5310MHz_TX

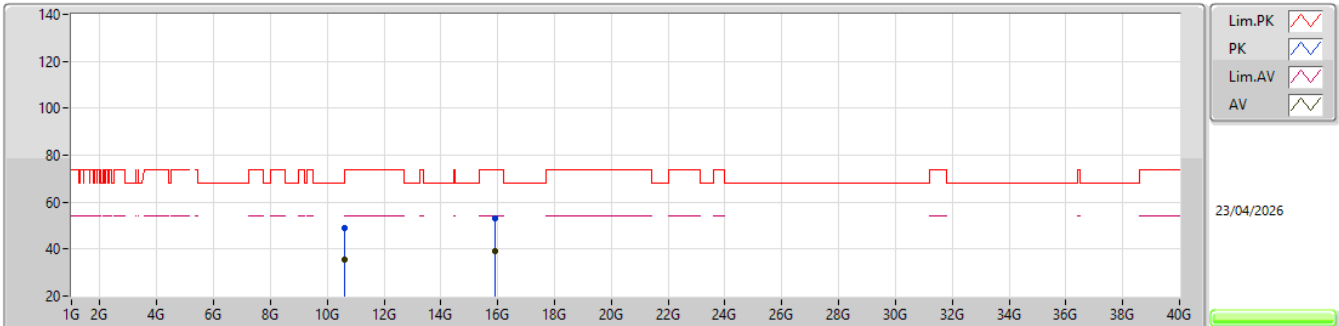


EUT_Y_4TX
Setting 20
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.61624G	49.12	74.00	-24.88	41.36	3	Horizontal	130	2.44	-	39.03	14.26	45.53			
AV	10.61659G	35.76	54.00	-18.24	28.00	3	Horizontal	130	2.44	-	39.03	14.26	45.53			
PK	15.92681G	53.33	74.00	-20.67	44.06	3	Horizontal	0	1.45	-	37.65	15.38	43.76			
AV	15.9268G	39.27	54.00	-14.73	30.00	3	Horizontal	0	1.45	-	37.65	15.38	43.76			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5510MHz_TX

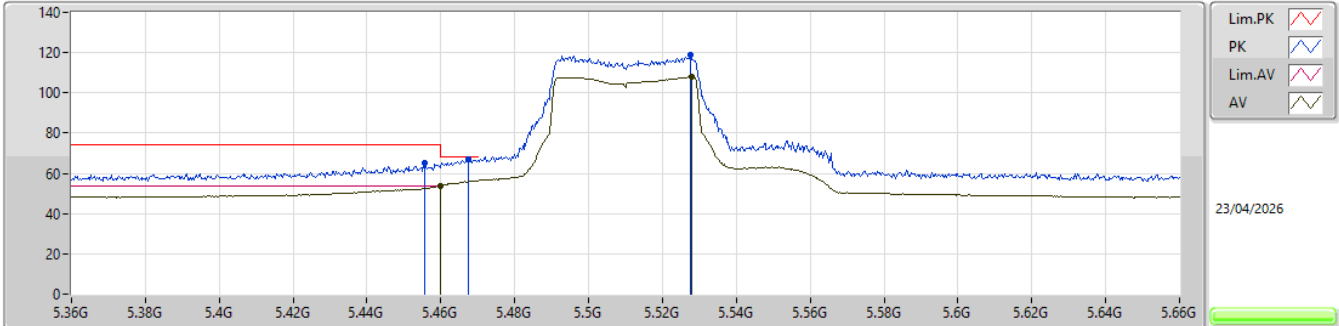


EUT Y_4TX
Setting 24
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4557G	64.91	74.00	-9.09	58.54	3	Vertical	358.4	3.00	-	32.91	8.46	35.00			
AV	5.4599G	53.98	54.00	-0.02	47.59	3	Vertical	358.4	3.00	-	32.92	8.46	34.99			
PK	5.4674G	66.92	68.20	-1.28	60.51	3	Vertical	358.4	3.00	-	32.93	8.47	34.99			
PK	5.5277G	118.73	Inf	-Inf	112.18	3	Vertical	358.4	3.00	-	33.00	8.52	34.97			
AV	5.528G	108.02	Inf	-Inf	101.47	3	Vertical	358.4	3.00	-	33.00	8.52	34.97			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5510MHz_TX

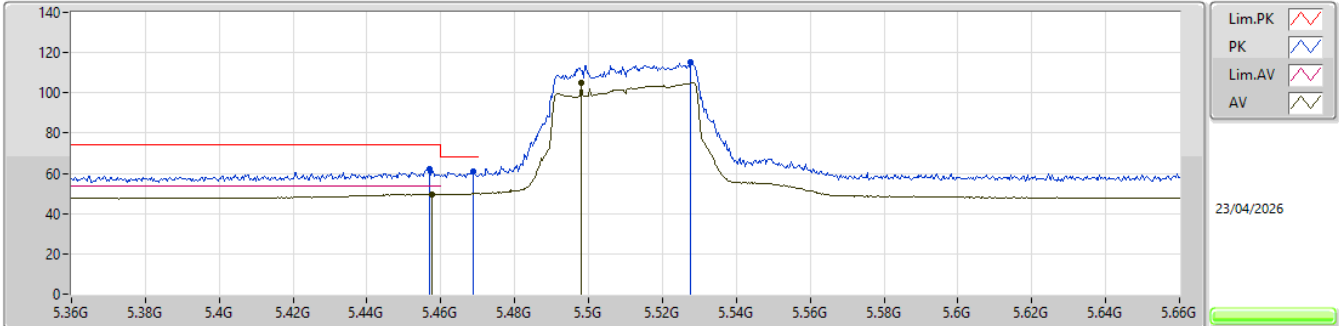


EUT_Y_4TX
Setting 24
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4569G	62.09	74.00	-11.91	55.72	3	Horizontal	316.6	1.80	-	32.91	8.46	35.00			
AV	5.4575G	49.61	54.00	-4.39	43.24	3	Horizontal	316.6	1.80	-	32.91	8.46	35.00			
PK	5.4689G	60.91	68.20	-7.29	54.49	3	Horizontal	316.6	1.80	-	32.94	8.47	34.99			
AV	5.498G	105.12	Inf	-Inf	98.61	3	Horizontal	316.6	1.80	-	33.00	8.49	34.98			
PK	5.5277G	115.18	Inf	-Inf	108.63	3	Horizontal	316.6	1.80	-	33.00	8.52	34.97			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5510MHz_TX

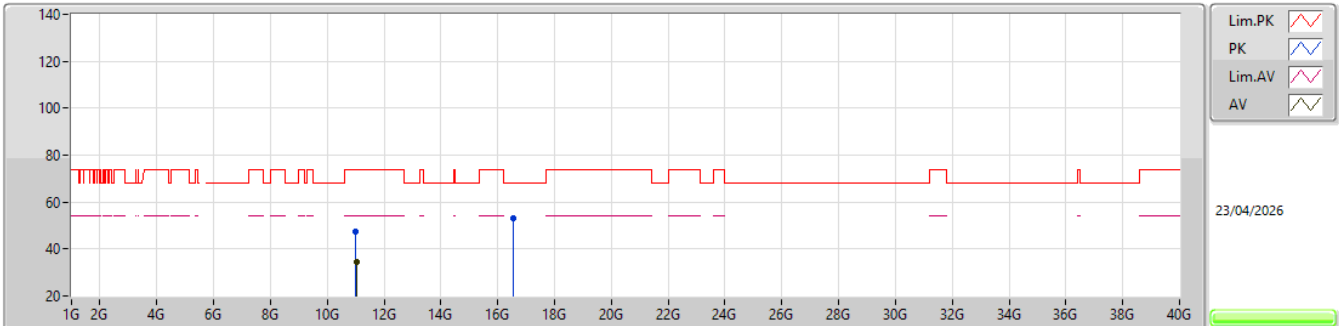EUT_Y_4TX
Setting 24
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01652G	47.46	74.00	-26.54	40.45	3	Vertical	16	2.79	-	38.77	14.48	46.24			
AV	11.02091G	34.45	54.00	-19.55	27.44	3	Vertical	16	2.79	-	38.76	14.48	46.23			
PK	16.53408G	53.05	68.20	-15.15	43.70	3	Vertical	128	2.03	-	38.40	15.52	44.57			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5510MHz_TX

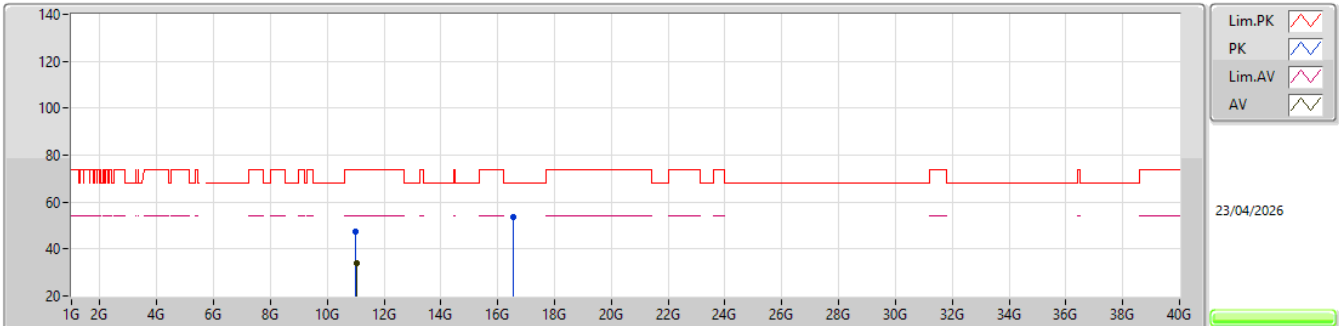EUT_Y_4TX
Setting 24
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01539G	47.44	74.00	-26.56	40.43	3	Horizontal	14	1.32	-	38.77	14.48	46.24			
AV	11.02334G	34.07	54.00	-19.93	27.07	3	Horizontal	14	1.32	-	38.75	14.48	46.23			
PK	16.52803G	53.42	68.20	-14.78	44.04	3	Horizontal	148	2.98	-	38.43	15.52	44.57			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5550MHz_TX

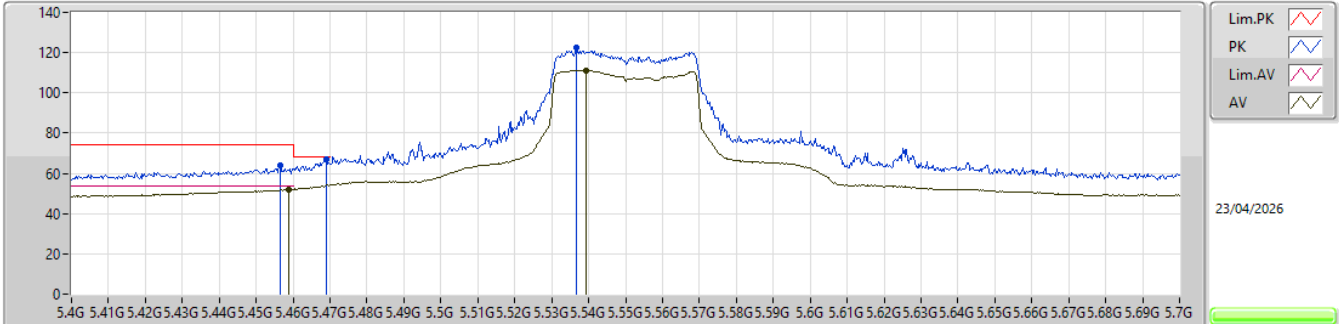


EUT Y_4TX
Setting 27
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4564G	64.13	74.00	-9.87	57.76	3	Vertical	347.9	3.00	-	32.91	8.46	35.00			
AV	5.4588G	51.95	54.00	-2.05	45.56	3	Vertical	347.9	3.00	-	32.92	8.46	34.99			
PK	5.469G	67.11	68.20	-1.09	60.69	3	Vertical	347.9	3.00	-	32.94	8.47	34.99			
PK	5.5368G	122.69	Inf	-Inf	116.13	3	Vertical	347.9	3.00	-	33.00	8.52	34.96			
AV	5.5392G	111.19	Inf	-Inf	104.63	3	Vertical	347.9	3.00	-	33.00	8.52	34.96			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5550MHz_TX

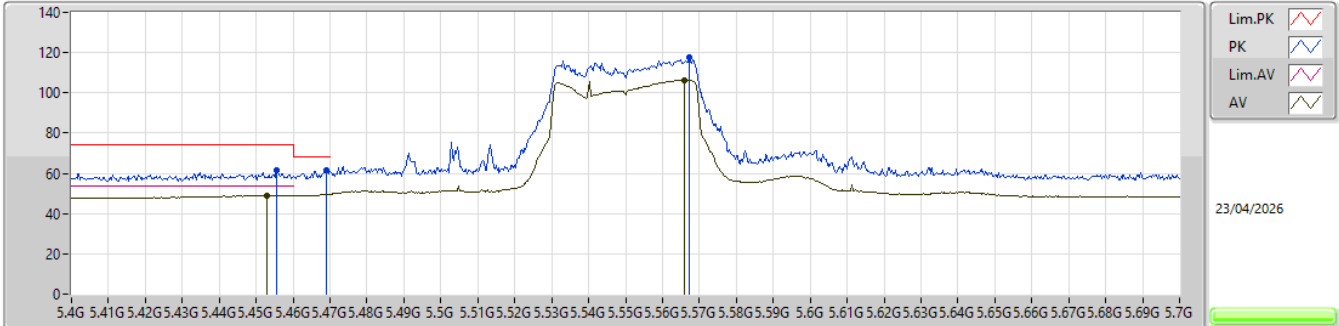


EUT_Y_4TX
Setting 27
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4555G	61.26	74.00	-12.74	54.89	3	Horizontal	330.1	1.80	-	32.91	8.46	35.00			
AV	5.4528G	48.93	54.00	-5.07	42.56	3	Horizontal	330.1	1.80	-	32.91	8.46	35.00			
PK	5.469G	61.48	68.20	-6.72	55.06	3	Horizontal	330.1	1.80	-	32.94	8.47	34.99			
PK	5.5671G	117.72	Inf	-Inf	111.15	3	Horizontal	330.1	1.80	-	32.97	8.55	34.95			
AV	5.5659G	106.27	Inf	-Inf	99.71	3	Horizontal	330.1	1.80	-	32.97	8.54	34.95			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5550MHz_TX

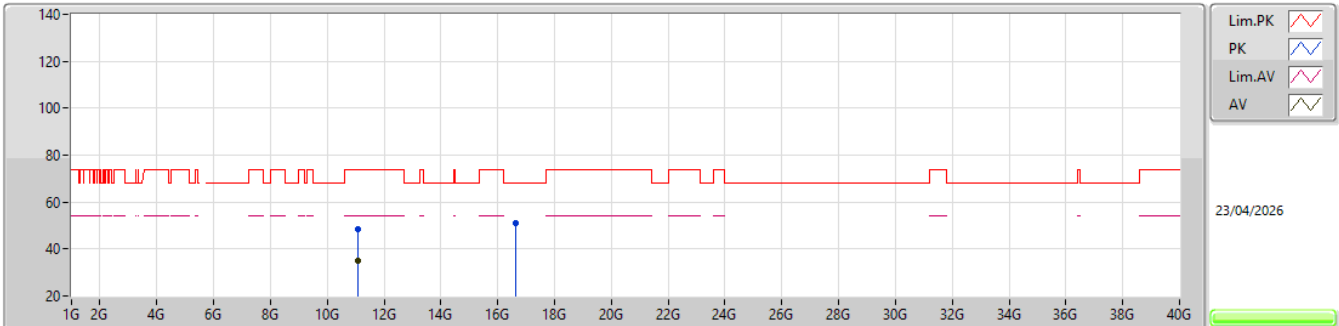EUT_Y_4TX
Setting 27
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.09839G	48.41	74.00	-25.59	41.25	3	Vertical	137	2.82	-	38.80	14.52	46.16			
AV	11.10194G	35.21	54.00	-18.79	28.04	3	Vertical	137	2.82	-	38.80	14.53	46.16			
PK	16.64859G	51.27	68.20	-16.93	41.89	3	Vertical	291	2.15	-	38.49	15.55	44.66			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5550MHz_TX

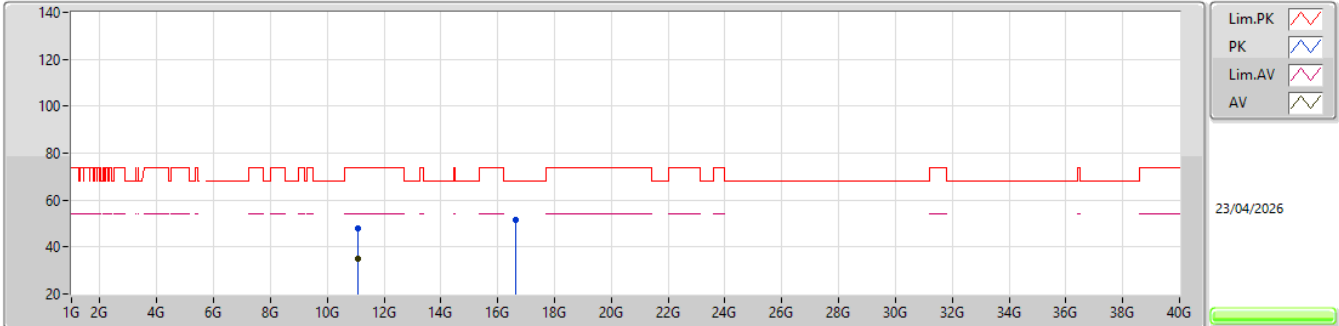
EUT_Y_4TX
Setting 27
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.09705G	47.97	74.00	-26.03	40.82	3	Horizontal	209	2.52	-	38.79	14.52	46.16			
AV	11.10209G	34.88	54.00	-19.12	27.71	3	Horizontal	209	2.52	-	38.80	14.53	46.16			
PK	16.65494G	51.66	68.20	-16.54	42.27	3	Horizontal	54	2.82	-	38.50	15.55	44.66			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5670MHz_TX

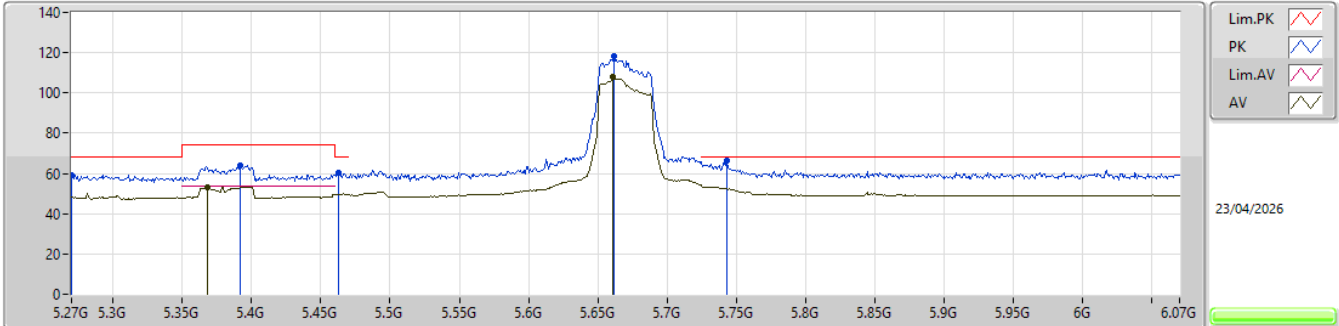


EUT_Y_4TX
Setting 24
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.27G	59.33	68.20	-8.87	53.12	3	Vertical	360	3.00	-	32.96	8.31	35.06			
PK	5.3916G	63.88	74.00	-10.12	57.59	3	Vertical	360	3.00	-	32.90	8.41	35.02			
AV	5.3684G	53.31	54.00	-0.69	47.05	3	Vertical	360	3.00	-	32.90	8.39	35.03			
PK	5.4628G	60.44	68.20	-7.76	54.03	3	Vertical	360	3.00	-	32.93	8.47	34.99			
PK	5.662G	118.44	Inf	-Inf	111.60	3	Vertical	360	3.00	-	33.10	8.64	34.90			
AV	5.6604G	108.17	Inf	-Inf	101.35	3	Vertical	360	3.00	-	33.08	8.64	34.90			
PK	5.7436G	66.52	68.20	-1.68	59.07	3	Vertical	360	3.00	-	33.57	8.74	34.86			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5670MHz_TX

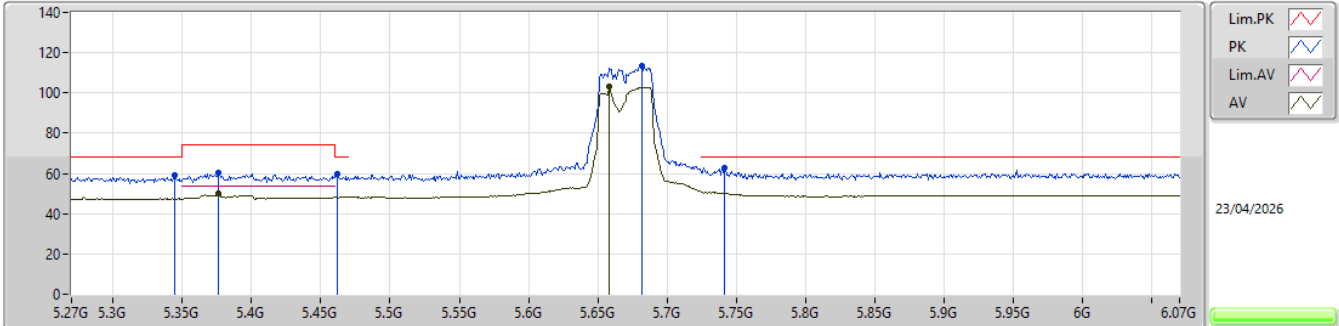


EUT_Y_4TX
Setting 24
05-X-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.3444G	59.16	68.20	-9.04	52.93	3	Horizontal	-0.1	1.80	-	32.90	8.37	35.04					
PK	5.3764G	60.33	74.00	-13.67	54.05	3	Horizontal	-0.1	1.80	-	32.90	8.40	35.02					
AV	5.3764G	50.24	54.00	-3.76	43.96	3	Horizontal	-0.1	1.80	-	32.90	8.40	35.02					
PK	5.462G	59.74	68.20	-8.46	53.34	3	Horizontal	-0.1	1.80	-	32.92	8.47	34.99					
PK	5.682G	113.15	Inf	-Inf	106.12	3	Horizontal	-0.1	1.80	-	33.26	8.66	34.89					
AV	5.658G	103.04	Inf	-Inf	96.24	3	Horizontal	-0.1	1.80	-	33.06	8.64	34.90					
PK	5.7412G	62.60	68.20	-5.60	55.17	3	Horizontal	-0.1	1.80	-	33.56	8.73	34.86					

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5670MHz_TX

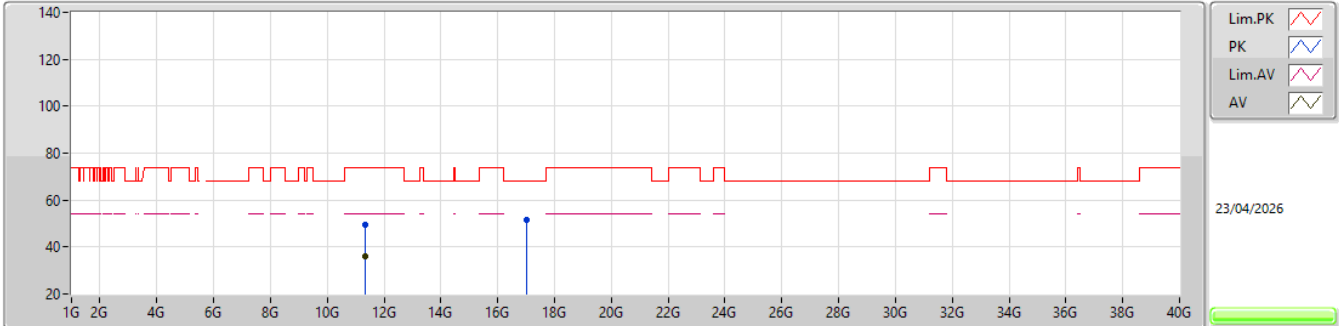


EUT_Y_4TX
Setting 24
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.33515G	49.23	74.00	-24.77	41.26	3	Vertical	103	2.57	-	39.27	14.65	45.95			
AV	11.34377G	35.91	54.00	-18.09	27.90	3	Vertical	103	2.57	-	39.29	14.66	45.94			
PK	17.01343G	51.36	68.20	-16.84	42.32	3	Vertical	180	2.13	-	38.31	15.65	44.92			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5670MHz_TX

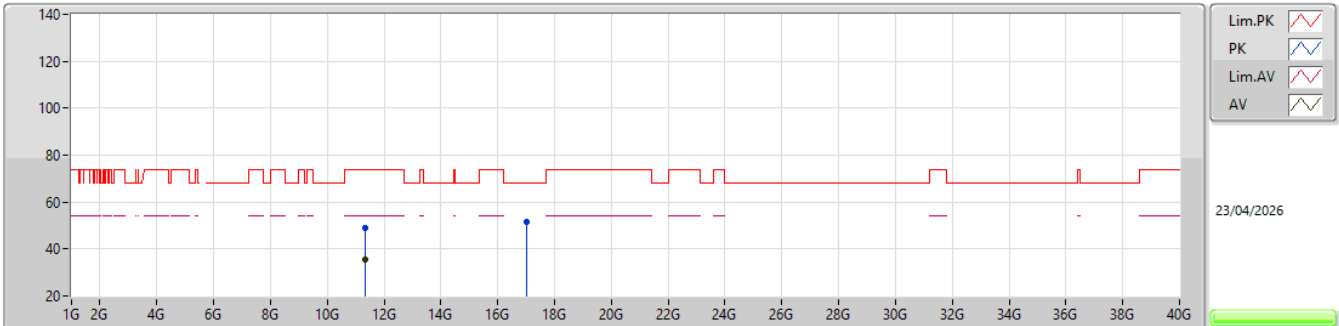EUT_Y_4TX
Setting 24
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.34009G	48.85	74.00	-25.15	40.85	3	Horizontal	140	1.84	-	39.28	14.66	45.94			
AV	11.34049G	35.66	54.00	-18.34	27.66	3	Horizontal	140	1.84	-	39.28	14.66	45.94			
PK	17.01492G	51.39	68.20	-16.81	42.34	3	Horizontal	12	2.90	-	38.32	15.65	44.92			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

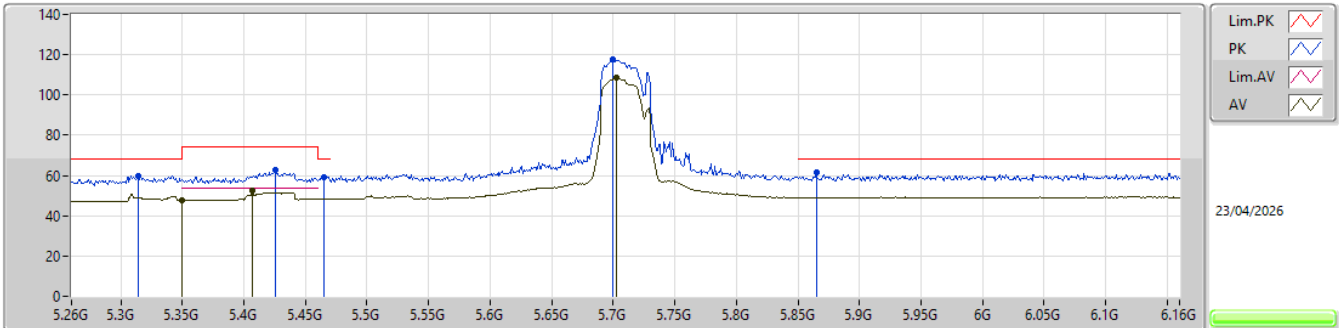


EUT_Y_4TX
Setting 27
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.314G	59.64	68.20	-8.56	53.44	3	Vertical	357.5	1.80	-	32.90	8.35	35.05
AV	5.35G	47.64	54.00	-6.36	41.39	3	Vertical	357.5	1.80	-	32.90	8.38	35.03
PK	5.4256G	62.46	74.00	-11.54	56.13	3	Vertical	357.5	1.80	-	32.90	8.44	35.01
AV	5.4067G	52.25	54.00	-1.75	45.93	3	Vertical	357.5	1.80	-	32.90	8.43	35.01
PK	5.4652G	58.93	68.20	-9.27	52.52	3	Vertical	357.5	1.80	-	32.93	8.47	34.99
PK	5.6992G	117.60	Inf	-Inf	110.41	3	Vertical	357.5	1.80	-	33.39	8.68	34.88
AV	5.7028G	108.36	Inf	-Inf	101.14	3	Vertical	357.5	1.80	-	33.41	8.69	34.88
PK	5.8648G	61.28	68.20	-6.92	53.25	3	Vertical	357.5	1.80	-	33.96	8.87	34.80

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

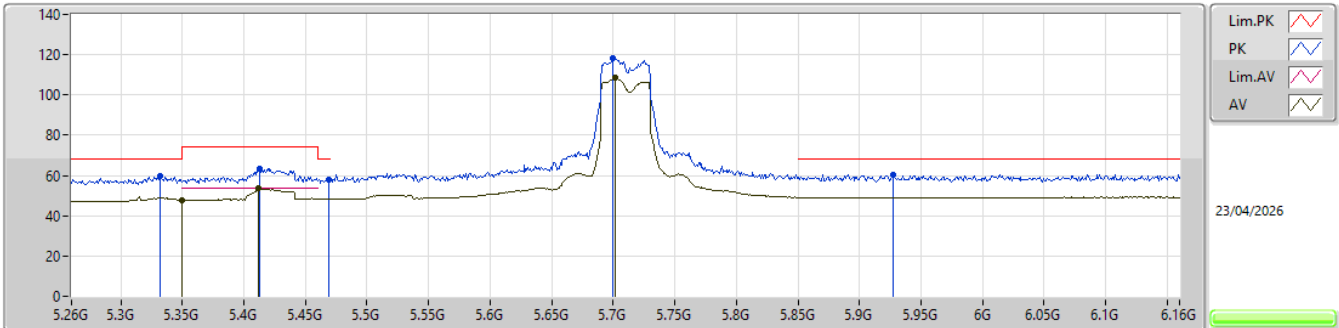


EUT_Y_4TX
Setting 27
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.332G	59.95	68.20	-8.25	53.73	3	Horizontal	348	1.80	-	32.90	8.36	35.04				
AV	5.35G	47.61	54.00	-6.39	41.36	3	Horizontal	348	1.80	-	32.90	8.38	35.03				
PK	5.413G	63.31	74.00	-10.69	56.99	3	Horizontal	348	1.80	-	32.90	8.43	35.01				
AV	5.4121G	53.70	54.00	-0.30	47.38	3	Horizontal	348	1.80	-	32.90	8.43	35.01				
PK	5.4688G	58.12	68.20	-10.08	51.70	3	Horizontal	348	1.80	-	32.94	8.47	34.99				
PK	5.7001G	117.99	Inf	-Inf	110.78	3	Horizontal	348	1.80	-	33.40	8.69	34.88				
AV	5.7019G	108.61	Inf	-Inf	101.39	3	Horizontal	348	1.80	-	33.41	8.69	34.88				
PK	5.9269G	60.53	68.20	-7.67	52.21	3	Horizontal	348	1.80	-	34.15	8.95	34.78				

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5710MHz Straddle 5.47-5.725GHz_TX

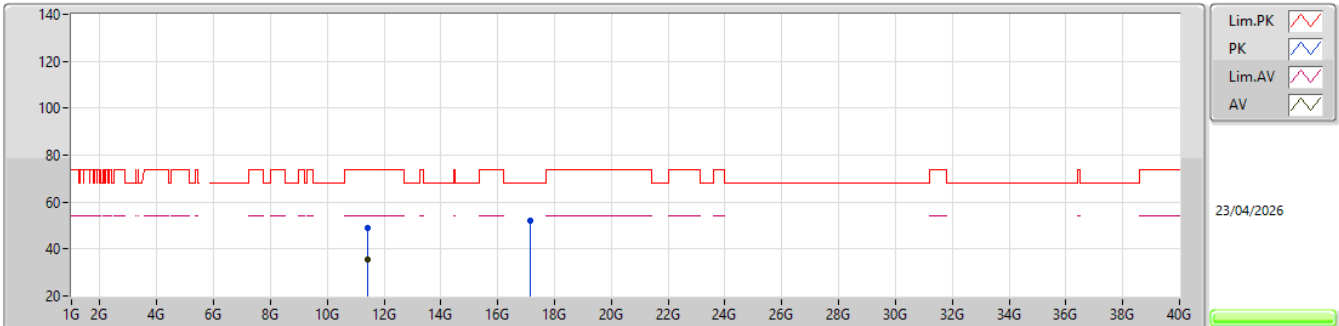EUT_Y_4TX
Setting 27
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.42095G	48.87	74.00	-25.13	40.92	3	Vertical	84	2.15	-	39.12	14.70	45.87			
AV	11.41656G	35.56	54.00	-18.44	27.61	3	Vertical	84	2.15	-	39.13	14.70	45.88			
PK	17.12629G	51.82	68.20	-16.38	42.60	3	Vertical	342	2.06	-	38.55	15.68	45.01			

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

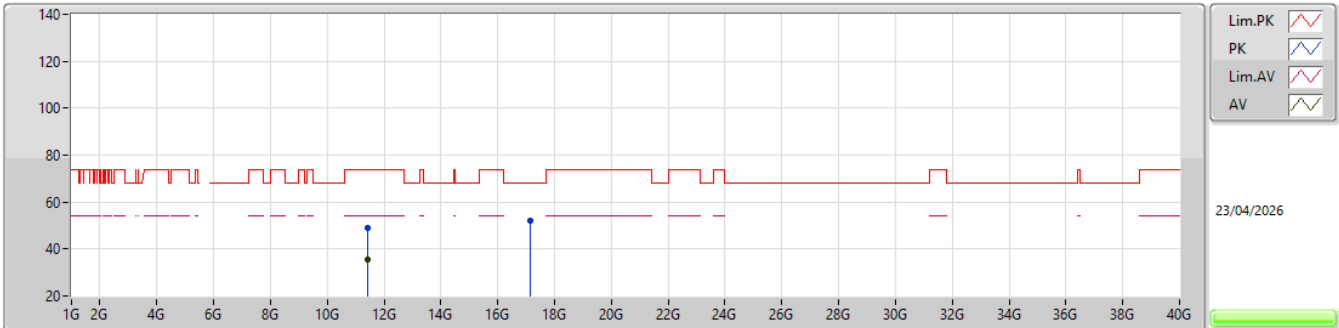


EUT_Y_4TX
Setting 27
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.41707G	48.80	74.00	-25.20	40.84	3	Horizontal	331	2.71	-	39.13	14.70	45.87			
AV	11.41853G	35.67	54.00	-18.33	27.71	3	Horizontal	331	2.71	-	39.13	14.70	45.87			
PK	17.13265G	52.24	68.20	-15.96	43.01	3	Horizontal	223	1.08	-	38.57	15.68	45.02			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5755MHz_TX

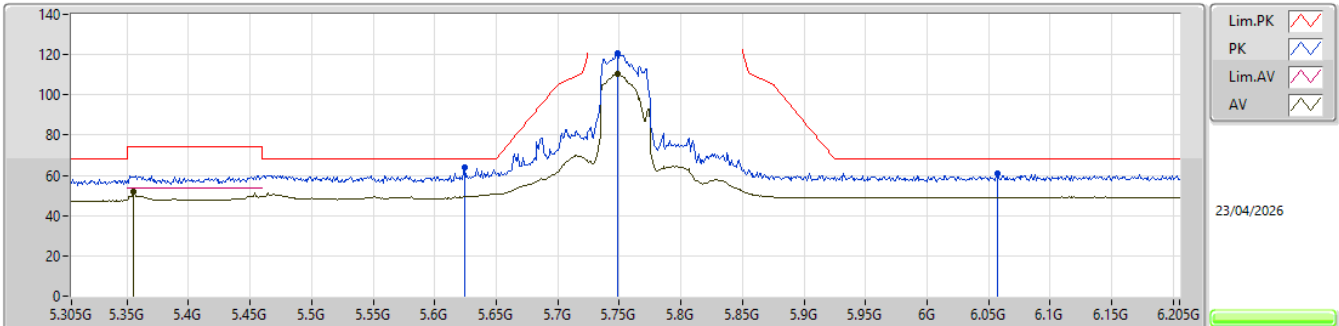


EUT_Y_4TX
Setting 28
05-X-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
AV	5.3554G	51.83	54.00	-2.17	45.58	3	Vertical	0	1.80	-	32.90	8.38	35.03			
PK	5.6245G	63.98	68.20	-4.22	57.35	3	Vertical	0	1.80	-	32.95	8.60	34.92			
PK	5.7487G	120.55	Inf	-Inf	113.08	3	Vertical	0	1.80	-	33.59	8.74	34.86			
AV	5.7487G	110.24	Inf	-Inf	102.77	3	Vertical	0	1.80	-	33.59	8.74	34.86			
PK	6.0574G	61.06	68.20	-7.14	52.51	3	Vertical	0	1.80	-	34.19	9.06	34.70			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5755MHz_TX

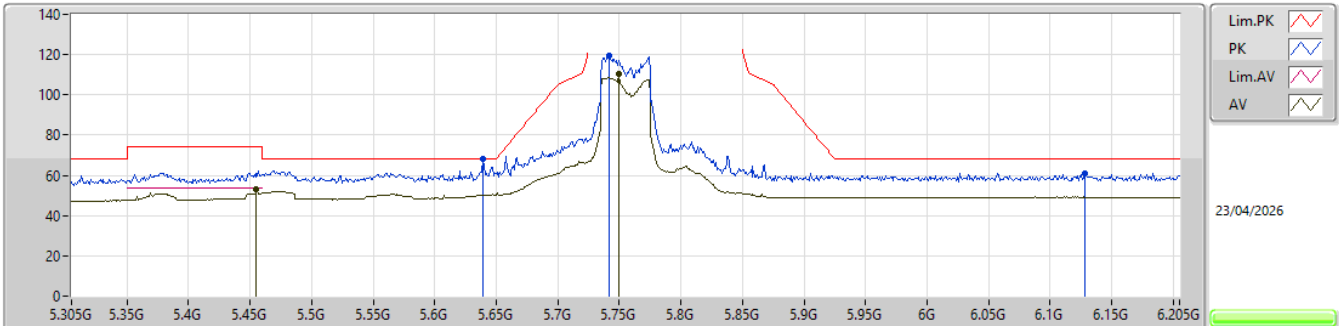


EUT Y_4TX
Setting 28
05-X-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
AV	5.4553G	52.87	54.00	-1.13	46.50	3	Horizontal	354	1.80	-	32.91	8.46	35.00			
PK	5.6389G	68.06	68.20	-0.14	61.38	3	Horizontal	354	1.80	-	32.98	8.61	34.91			
PK	5.7415G	119.44	Inf	-Inf	112.00	3	Horizontal	354	1.80	-	33.57	8.73	34.86			
AV	5.7496G	110.20	Inf	-Inf	102.72	3	Horizontal	354	1.80	-	33.60	8.74	34.86			
PK	6.1285G	60.89	68.20	-7.31	52.29	3	Horizontal	354	1.80	-	34.16	9.09	34.65			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5755MHz_TX

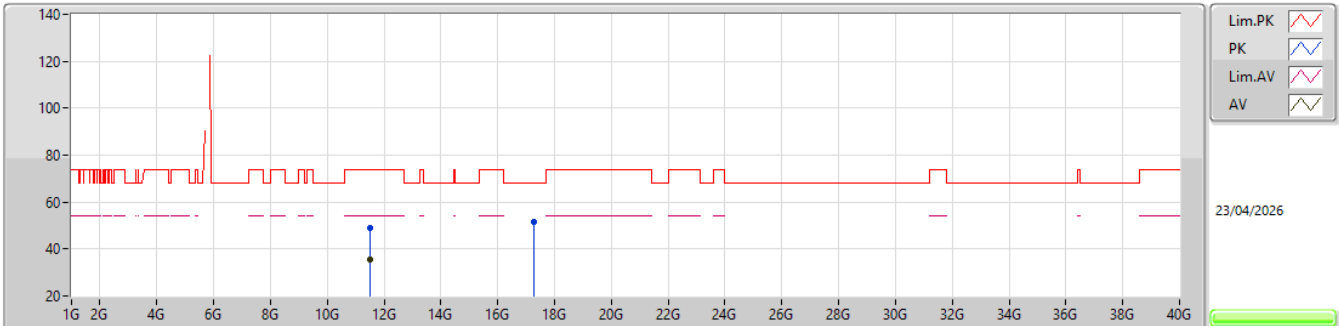EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50984G	48.81	74.00	-25.19	40.88	3	Vertical	143	1.81	-	38.98	14.75	45.80			
AV	11.51436G	35.57	54.00	-18.43	27.65	3	Vertical	143	1.81	-	38.97	14.75	45.80			
PK	17.2626G	51.47	68.20	-16.73	41.88	3	Vertical	346	1.82	-	39.00	15.71	45.12			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5755MHz_TX

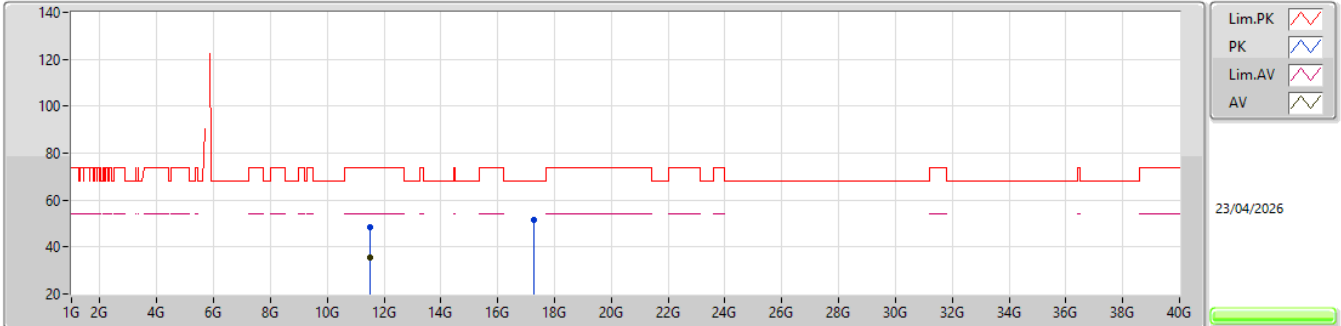


EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.51236G	48.56	74.00	-25.44	40.63	3	Horizontal	183	1.79	-	38.98	14.75	45.80			
AV	11.51436G	35.33	54.00	-18.67	27.41	3	Horizontal	183	1.79	-	38.97	14.75	45.80			
PK	17.26969G	51.39	68.20	-16.81	41.80	3	Horizontal	232	1.41	-	39.00	15.72	45.13			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5795MHz_TX

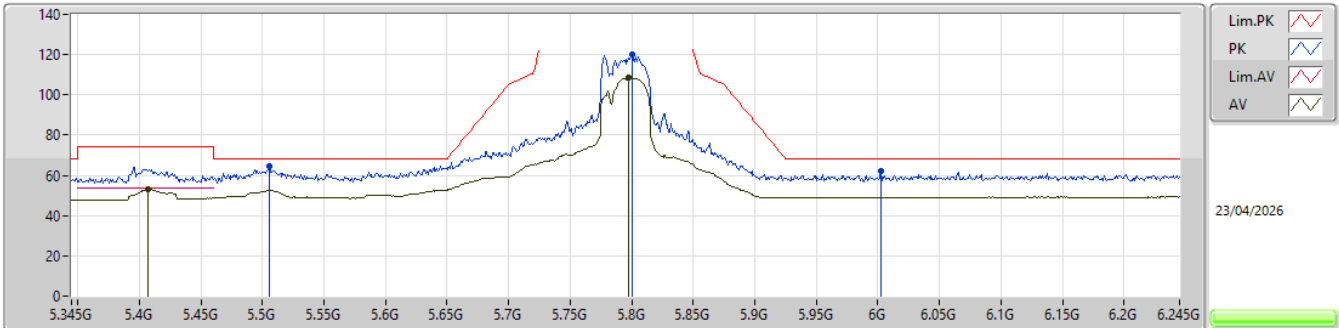


EUT Y_4TX
Setting 29
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.5061G	64.41	68.20	-3.79	57.89	3	Vertical	360	1.80	-	33.00	8.50	34.98			
AV	5.4071G	53.26	54.00	-0.74	46.94	3	Vertical	360	1.80	-	32.90	8.43	35.01			
PK	5.8004G	119.88	Inf	-Inf	112.12	3	Vertical	360	1.80	-	33.80	8.80	34.84			
AV	5.7977G	108.59	Inf	-Inf	100.84	3	Vertical	360	1.80	-	33.79	8.80	34.84			
PK	6.0029G	62.11	68.20	-6.09	53.62	3	Vertical	360	1.80	-	34.20	9.03	34.74			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5795MHz_TX

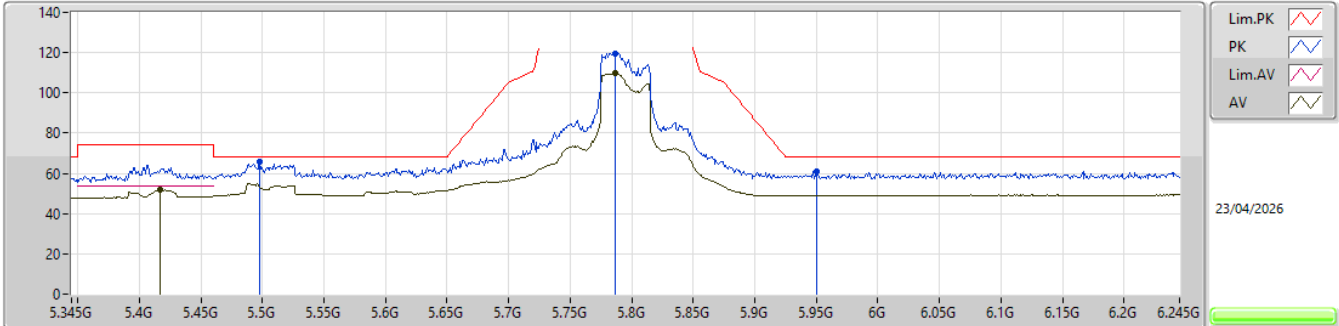


EUT Y_4TX
Setting 29
05-X-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.498G	65.60	68.20	-2.60	59.09	3	Horizontal	349	1.80	-	33.00	8.49	34.98			
AV	5.417G	51.80	54.00	-2.20	45.48	3	Horizontal	349	1.80	-	32.90	8.43	35.01			
PK	5.7869G	119.78	Inf	-Inf	112.09	3	Horizontal	349	1.80	-	33.75	8.78	34.84			
AV	5.7869G	109.66	Inf	-Inf	101.97	3	Horizontal	349	1.80	-	33.75	8.78	34.84			
PK	5.9498G	61.23	68.20	-6.97	52.82	3	Horizontal	349	1.80	-	34.20	8.97	34.76			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5795MHz_TX

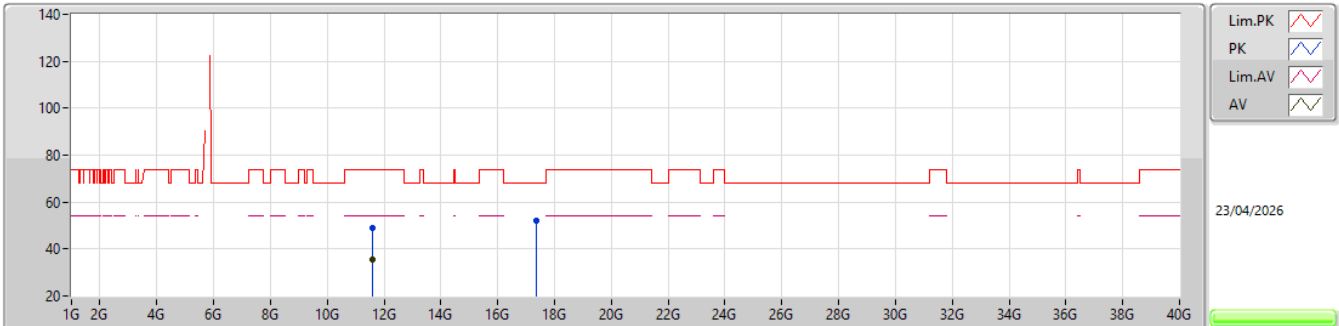EUT_Y_4TX
Setting 29
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.587G	48.71	74.00	-25.29	41.07	3	Vertical	161	2.09	-	38.68	14.79	45.83			
AV	11.59302G	35.63	54.00	-18.37	28.02	3	Vertical	161	2.09	-	38.64	14.80	45.83			
PK	17.38057G	52.02	68.20	-16.18	42.06	3	Vertical	130	2.08	-	39.42	15.75	45.21			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX


5795MHz_TX

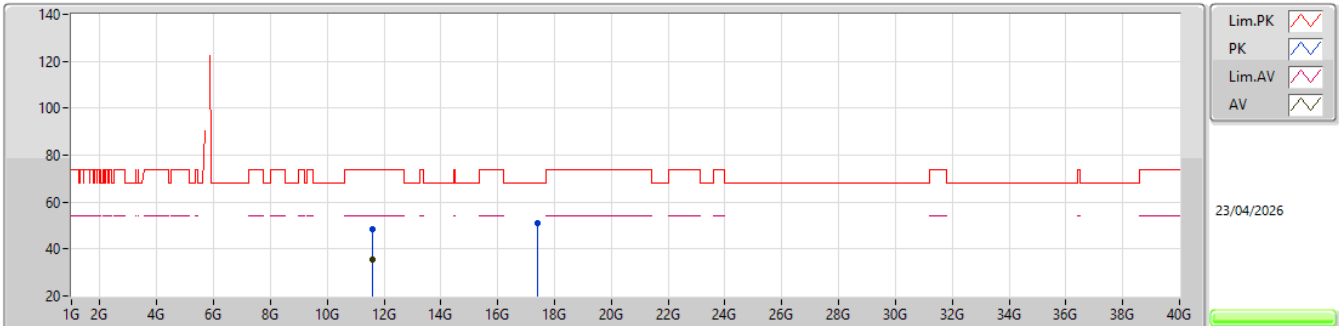EUT_Y_4TX
Setting 29
01-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.587G	48.34	74.00	-25.66	40.70	3	Horizontal	55	1.04	-	38.68	14.79	45.83			
AV	11.59276G	35.48	54.00	-18.52	27.87	3	Horizontal	55	1.04	-	38.64	14.80	45.83			
PK	17.38882G	51.26	68.20	-16.94	41.27	3	Horizontal	236	1.59	-	39.46	15.75	45.22			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

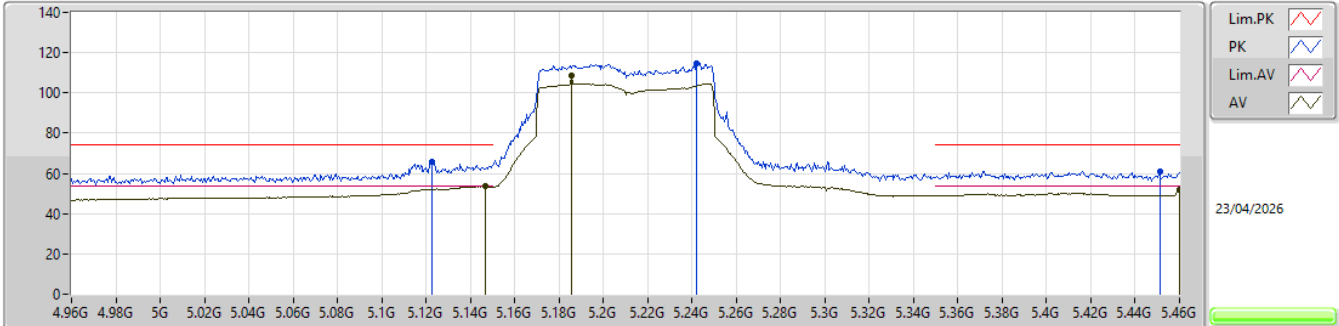


EUT Y_4TX
Setting 25
05-X-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1225G	65.63	74.00	-8.37	59.48	3	Vertical	13	3.00	-	33.05	8.22	35.12			
AV	5.147G	53.73	54.00	-0.27	47.52	3	Vertical	13	3.00	-	33.09	8.23	35.11			
PK	5.242G	114.62	Inf	-Inf	108.38	3	Vertical	13	3.00	-	33.02	8.29	35.07			
AV	5.1855G	108.67	Inf	-Inf	102.42	3	Vertical	13	3.00	-	33.10	8.24	35.09			
PK	5.451G	60.93	74.00	-13.07	54.57	3	Vertical	13	3.00	-	32.90	8.46	35.00			
AV	5.46G	52.05	54.00	-1.95	45.66	3	Vertical	13	3.00	-	32.92	8.46	34.99			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

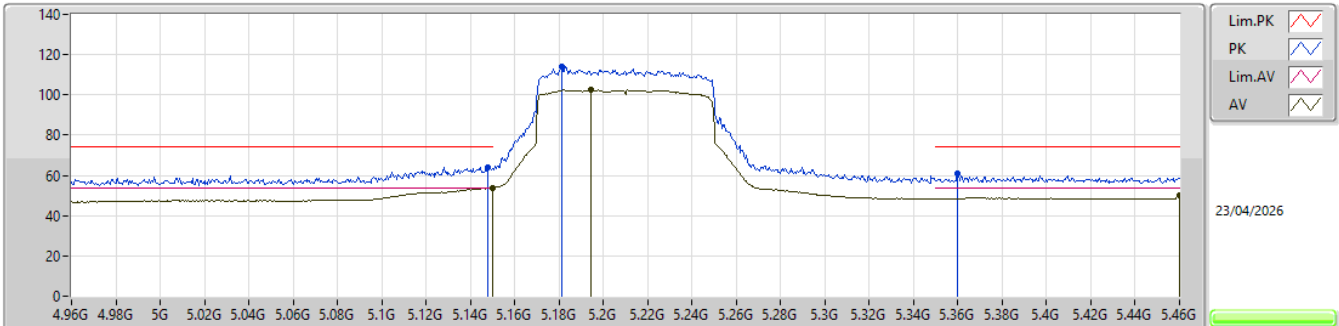


EUT_Y_4TX
Setting 25
05-X-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	63.86	74.00	-10.14	57.64	3	Horizontal	319.3	1.80	-	33.10	8.23	35.11			
AV	5.15G	53.89	54.00	-0.11	47.67	3	Horizontal	319.3	1.80	-	33.10	8.23	35.11			
PK	5.1815G	113.80	Inf	-Inf	107.55	3	Horizontal	319.3	1.80	-	33.10	8.24	35.09			
AV	5.1945G	102.42	Inf	-Inf	96.16	3	Horizontal	319.3	1.80	-	33.10	8.25	35.09			
PK	5.36G	60.87	74.00	-13.13	54.61	3	Horizontal	319.3	1.80	-	32.90	8.39	35.03			
AV	5.46G	50.34	54.00	-3.66	43.95	3	Horizontal	319.3	1.80	-	32.92	8.46	34.99			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

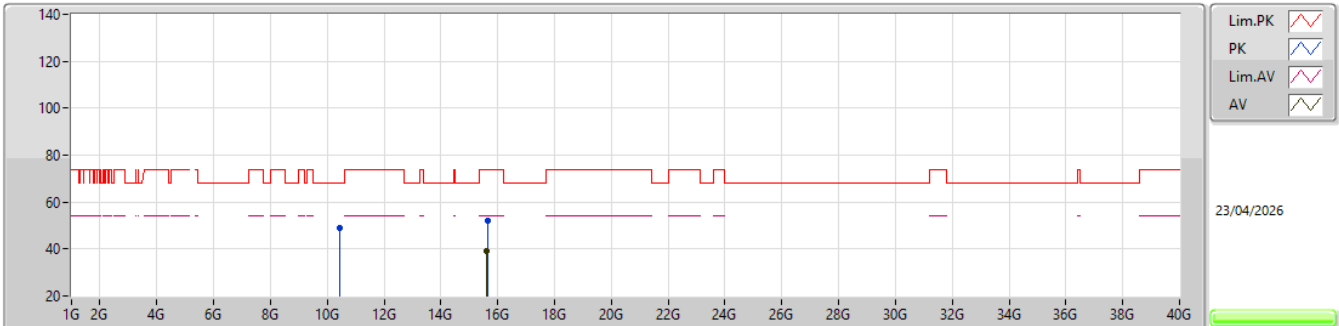


EUT_Y_4TX
Setting 25
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42205G	48.71	68.20	-19.49	41.35	3	Vertical	325	2.53	-	38.54	14.15	45.33			
PK	15.63174G	52.03	74.00	-21.97	42.04	3	Vertical	150	1.96	-	37.77	15.36	43.14			
AV	15.6252G	39.12	54.00	-14.88	29.09	3	Vertical	150	1.96	-	37.80	15.36	43.13			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

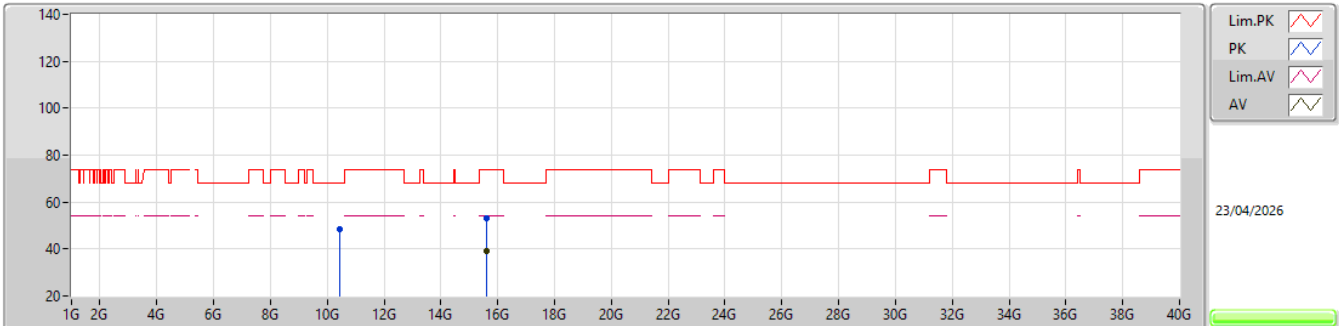


EUT_Y_4TX
Setting 25
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42364G	48.33	68.20	-19.87	40.96	3	Horizontal	163	1.38	-	38.55	14.15	45.33			
PK	15.6277G	52.95	74.00	-21.05	42.94	3	Horizontal	74	1.21	-	37.79	15.36	43.14			
AV	15.62973G	39.12	54.00	-14.88	29.12	3	Horizontal	74	1.21	-	37.78	15.36	43.14			

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5290MHz_TX

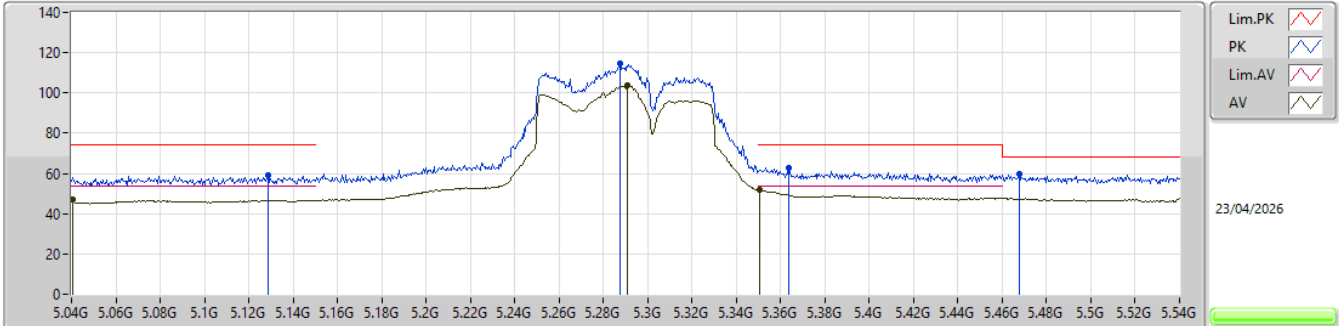


EUT_Y_4TX
Setting 28
01-E-I-1-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1285G	59.41	74.00	-14.59	49.25	3	Vertical	360	1.80	-	33.01	9.70	32.55			
AV	5.0405G	47.22	54.00	-6.78	37.19	3	Vertical	360	1.80	-	32.94	9.66	32.57			
PK	5.2875G	114.61	Inf	-Inf	104.59	3	Vertical	360	1.80	-	32.82	9.71	32.51			
AV	5.291G	104.01	Inf	-Inf	94.00	3	Vertical	360	1.80	-	32.82	9.70	32.51			
PK	5.3635G	63.01	74.00	-10.99	53.06	3	Vertical	360	1.80	-	32.77	9.67	32.49			
AV	5.3505G	51.75	54.00	-2.25	41.77	3	Vertical	360	1.80	-	32.80	9.68	32.50			
PK	5.4675G	59.53	68.20	-8.67	49.49	3	Vertical	360	1.80	-	32.73	9.78	32.47			

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5290MHz_TX

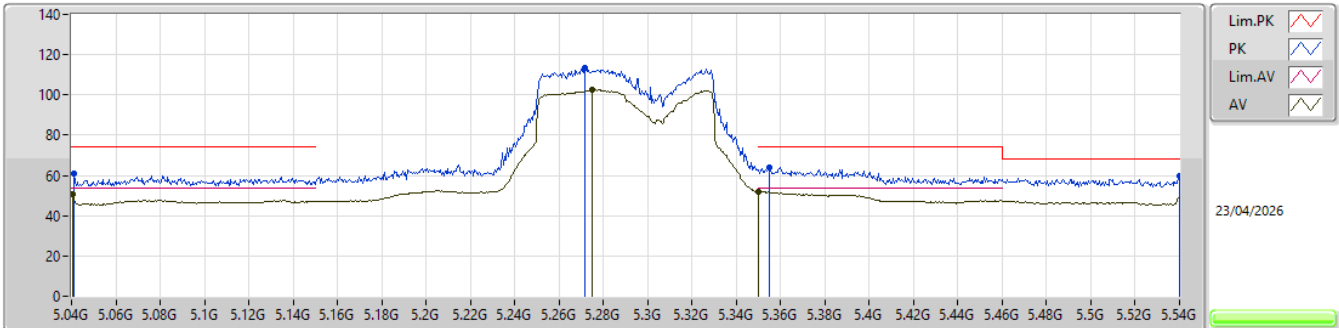


EUT_Y_4TX
Setting 28
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.041G	60.90	74.00	-13.10	50.87	3	Horizontal	329.1	1.80	-	32.94	9.66	32.57			
AV	5.0405G	50.48	54.00	-3.52	40.45	3	Horizontal	329.1	1.80	-	32.94	9.66	32.57			
PK	5.2715G	113.30	Inf	-Inf	103.24	3	Horizontal	329.1	1.80	-	32.86	9.71	32.51			
AV	5.275G	102.45	Inf	-Inf	92.40	3	Horizontal	329.1	1.80	-	32.85	9.71	32.51			
PK	5.355G	64.07	74.00	-9.93	54.09	3	Horizontal	329.1	1.80	-	32.79	9.68	32.49			
AV	5.35G	51.89	54.00	-2.11	41.91	3	Horizontal	329.1	1.80	-	32.80	9.68	32.50			
PK	5.54G	59.81	68.20	-8.39	49.63	3	Horizontal	329.1	1.80	-	32.72	9.92	32.46			

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5290MHz_TX

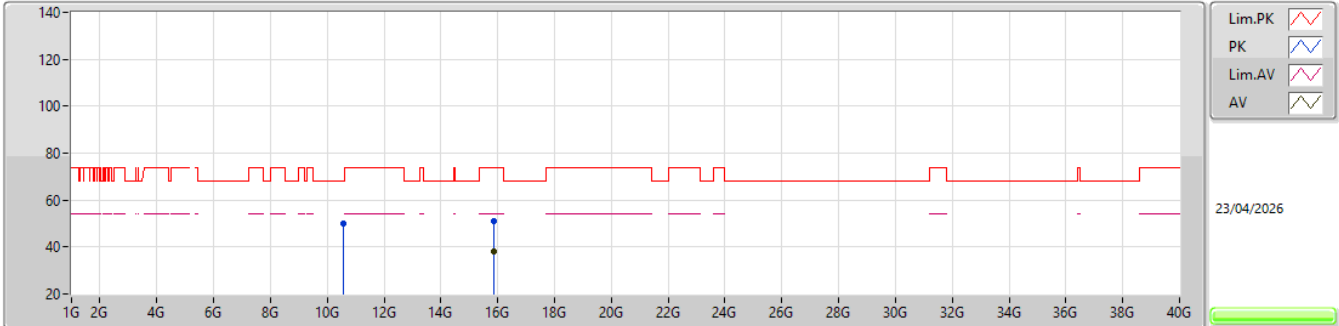


EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57744G	49.75	68.20	-18.45	42.15	3	Vertical	356	2.53	-	38.82	14.24	45.46			
PK	15.87038G	51.23	74.00	-22.77	41.98	3	Vertical	168	2.23	-	37.52	15.37	43.64			
AV	15.87443G	38.02	54.00	-15.98	28.75	3	Vertical	168	2.23	-	37.55	15.37	43.65			

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5290MHz_TX

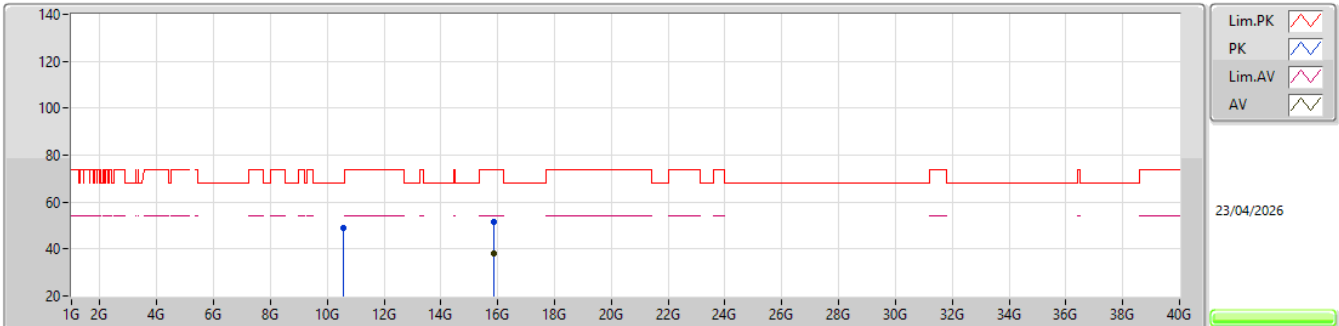


EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.577575G	48.90	68.20	-19.30	41.30	3	Horizontal	319	1.26	-	38.82	14.24	45.46			
PK	15.87393G	51.36	74.00	-22.64	42.10	3	Horizontal	282	1.95	-	37.54	15.37	43.65			
AV	15.87433G	38.04	54.00	-15.96	28.77	3	Horizontal	282	1.95	-	37.55	15.37	43.65			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5530MHz_TX

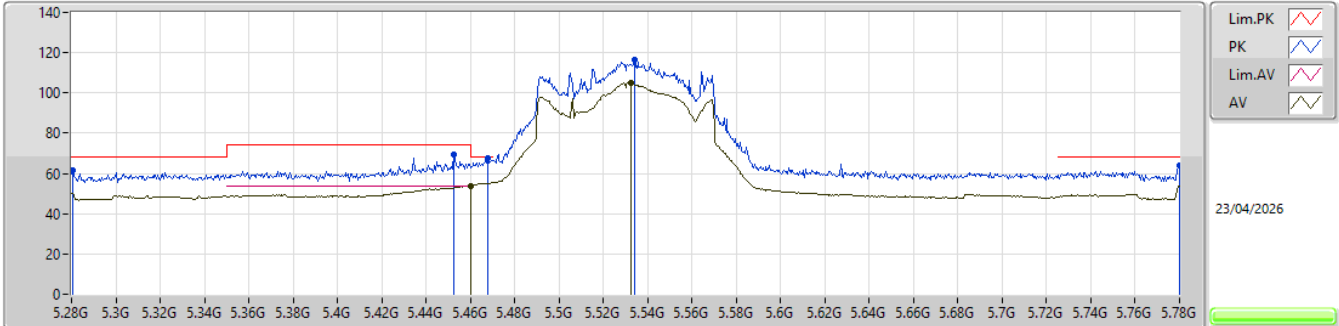


EUT_Y_4TX
Setting 26
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2805G	61.48	68.20	-6.72	51.44	3	Vertical	11	3.00	-	32.84	9.71	32.51			
PK	5.4525G	69.41	74.00	-4.59	59.41	3	Vertical	11	3.00	-	32.71	9.76	32.47			
AV	5.46G	53.99	54.00	-0.01	43.97	3	Vertical	11	3.00	-	32.72	9.77	32.47			
PK	5.468G	67.36	68.20	-0.84	57.30	3	Vertical	11	3.00	-	32.74	9.79	32.47			
PK	5.534G	116.39	Inf	-Inf	106.21	3	Vertical	11	3.00	-	32.73	9.91	32.46			
AV	5.5325G	104.79	Inf	-Inf	94.61	3	Vertical	11	3.00	-	32.73	9.91	32.46			
PK	5.78G	63.86	68.20	-4.34	52.73	3	Vertical	11	3.00	-	33.58	10.00	32.45			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5530MHz_TX

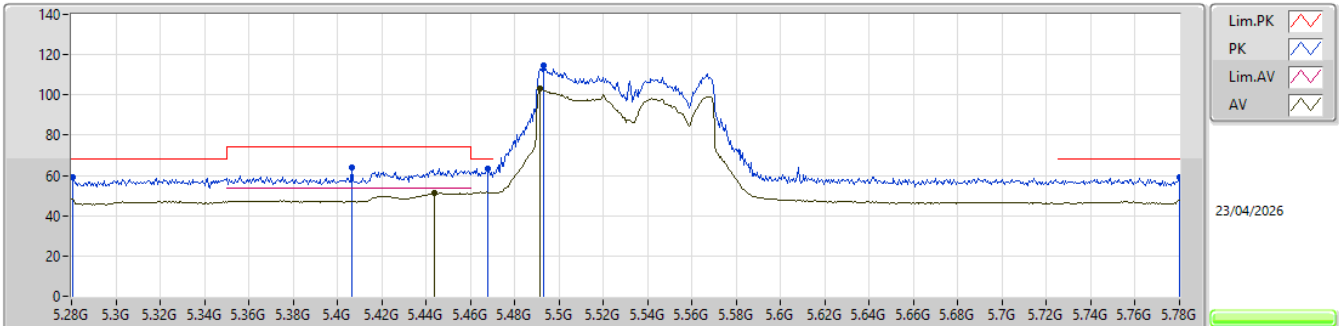


EUT_Y_4TX
Setting 26
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2805G	58.88	68.20	-9.32	48.84	3	Horizontal	348	1.80	-	32.84	9.71	32.51
PK	5.4065G	64.15	74.00	-9.85	54.26	3	Horizontal	348	1.80	-	32.70	9.67	32.48
PK	5.468G	63.33	68.20	-4.87	53.27	3	Horizontal	348	1.80	-	32.74	9.79	32.47
AV	5.444G	51.11	54.00	-2.89	41.14	3	Horizontal	348	1.80	-	32.70	9.74	32.47
PK	5.493G	114.44	Inf	-Inf	104.28	3	Horizontal	348	1.80	-	32.79	9.83	32.46
AV	5.4915G	102.91	Inf	-Inf	92.76	3	Horizontal	348	1.80	-	32.78	9.83	32.46
PK	5.78G	58.97	68.20	-9.23	47.84	3	Horizontal	348	1.80	-	33.58	10.00	32.45

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5530MHz_TX

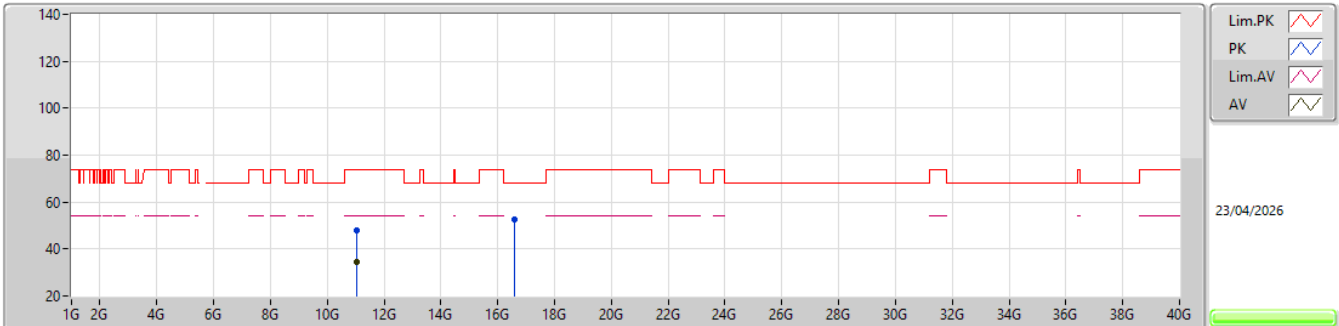EUT_Y_4TX
Setting 26
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.0578G	47.71	74.00	-26.29	40.69	3	Vertical	64	2.75	-	38.72	14.50	46.20			
AV	11.05685G	34.70	54.00	-19.30	27.69	3	Vertical	64	2.75	-	38.71	14.50	46.20			
PK	16.58964G	52.39	68.20	-15.81	43.24	3	Vertical	106	2.96	-	38.22	15.54	44.61			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5530MHz_TX

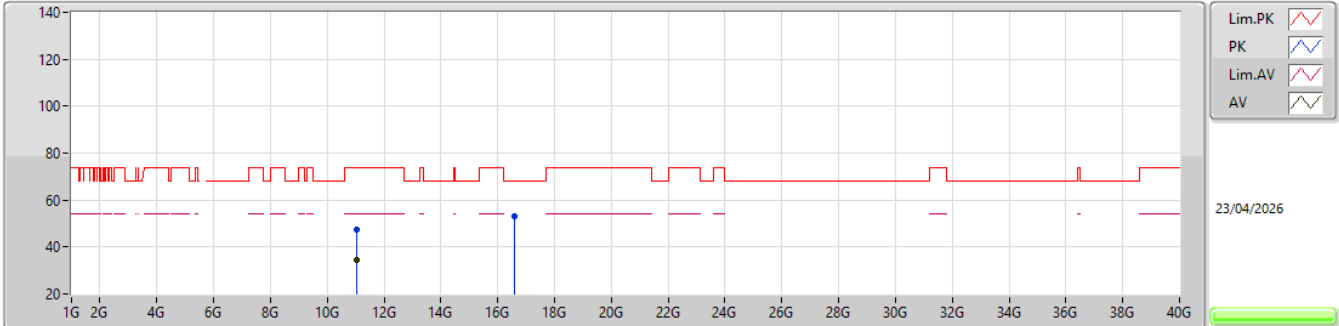EUT_Y_4TX
Setting 26
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05799G	47.22	74.00	-26.78	40.20	3	Horizontal	29	2.89	-	38.72	14.50	46.20			
AV	11.05909G	34.33	54.00	-19.67	27.31	3	Horizontal	29	2.89	-	38.72	14.50	46.20			
PK	16.59405G	52.91	68.20	-15.29	43.78	3	Horizontal	286	1.72	-	38.21	15.54	44.62			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5610MHz_TX

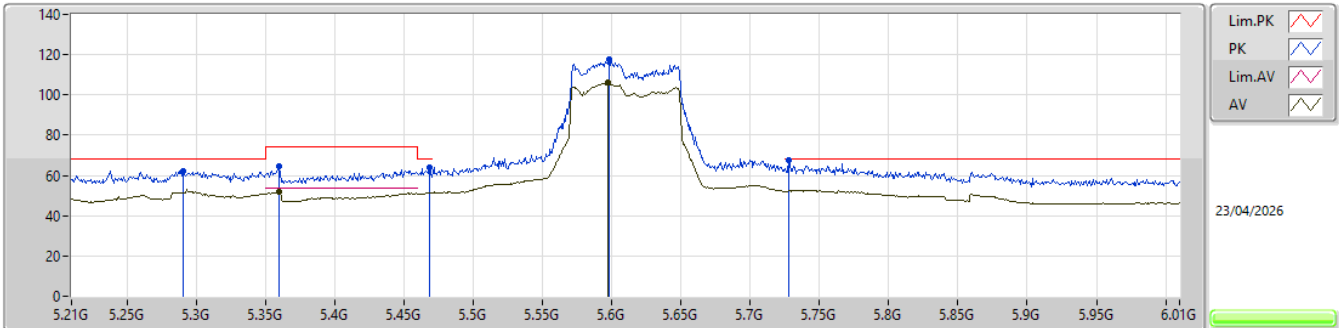


EUT Y_4TX
Setting 28
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2908G	62.22	68.20	-5.98	52.21	3	Vertical	335.9	2.58	-	32.82	9.70	32.51			
PK	5.3596G	64.61	74.00	-9.39	54.64	3	Vertical	335.9	2.58	-	32.78	9.68	32.49			
AV	5.3596G	51.80	54.00	-2.20	41.83	3	Vertical	335.9	2.58	-	32.78	9.68	32.49			
PK	5.4684G	64.01	68.20	-4.19	53.95	3	Vertical	335.9	2.58	-	32.74	9.79	32.47			
PK	5.598G	117.67	Inf	-Inf	107.40	3	Vertical	335.9	2.58	-	32.70	10.03	32.46			
AV	5.5972G	105.93	Inf	-Inf	95.67	3	Vertical	335.9	2.58	-	32.70	10.02	32.46			
PK	5.7276G	67.88	68.20	-0.32	57.01	3	Vertical	335.9	2.58	-	33.31	10.01	32.45			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5610MHz_TX

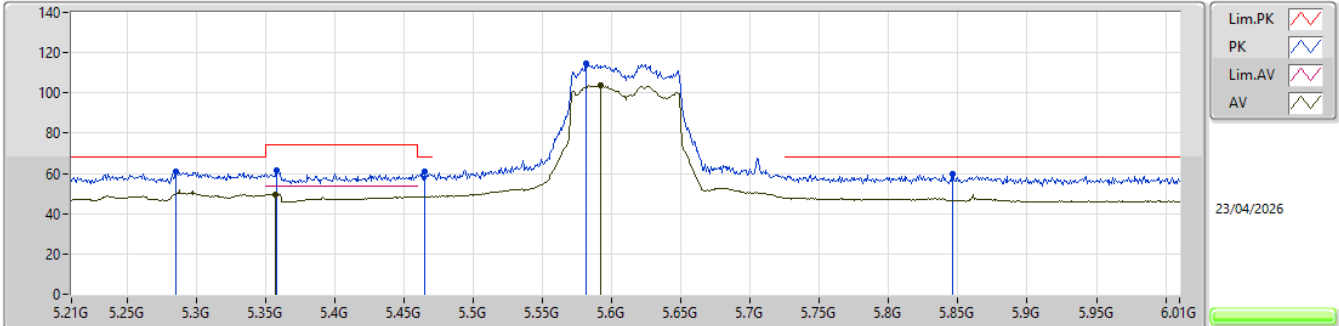


EUT_Y_4TX
Setting 28
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2852G	60.70	68.20	-7.50	50.67	3	Horizontal	317	1.80	-	32.83	9.71	32.51
PK	5.358G	61.76	74.00	-12.24	51.79	3	Horizontal	317	1.80	-	32.78	9.68	32.49
AV	5.3572G	49.51	54.00	-4.49	39.53	3	Horizontal	317	1.80	-	32.79	9.68	32.49
PK	5.4652G	61.08	68.20	-7.12	51.04	3	Horizontal	317	1.80	-	32.73	9.78	32.47
PK	5.5812G	114.55	Inf	-Inf	104.31	3	Horizontal	317	1.80	-	32.70	10.00	32.46
AV	5.5916G	103.57	Inf	-Inf	93.32	3	Horizontal	317	1.80	-	32.70	10.01	32.46
PK	5.846G	59.45	68.20	-8.75	47.98	3	Horizontal	317	1.80	-	33.88	10.04	32.45

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5610MHz_TX

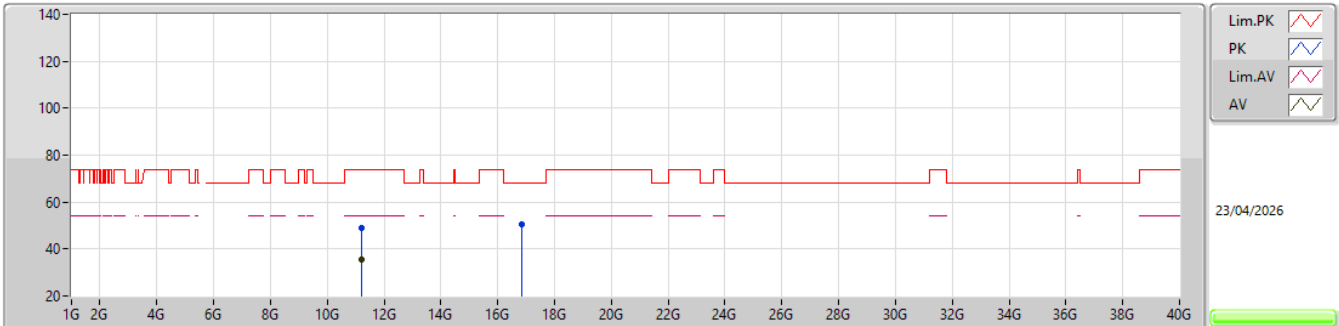EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22356G	49.16	74.00	-24.84	41.53	3	Vertical	285	1.76	-	39.09	14.59	46.05			
AV	11.21506G	35.65	54.00	-18.35	28.06	3	Vertical	285	1.76	-	39.06	14.59	46.06			
PK	16.82832G	50.36	68.20	-17.84	41.15	3	Vertical	255	2.19	-	38.40	15.60	44.79			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5610MHz_TX

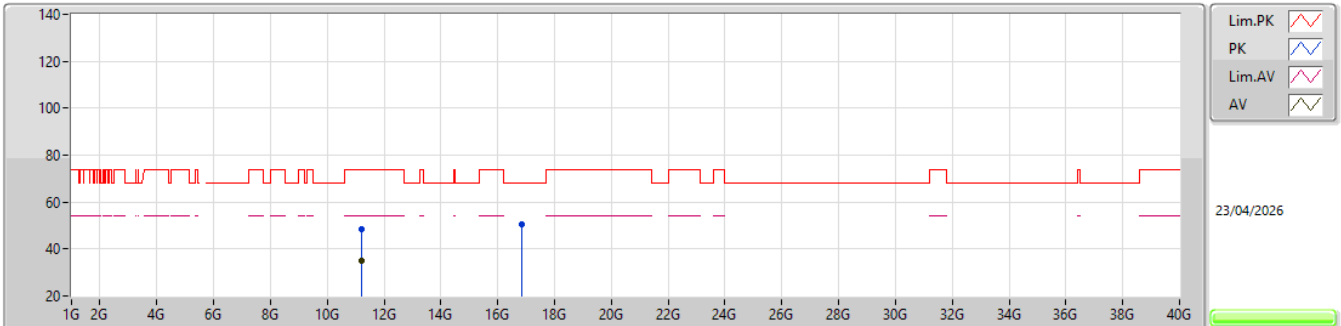


EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21733G	48.67	74.00	-25.33	41.06	3	Horizontal	209	2.91	-	39.07	14.59	46.05			
AV	11.21562G	35.23	54.00	-18.77	27.64	3	Horizontal	209	2.91	-	39.06	14.59	46.06			
PK	16.83038G	50.69	68.20	-17.51	41.48	3	Horizontal	248	1.80	-	38.40	15.60	44.79			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

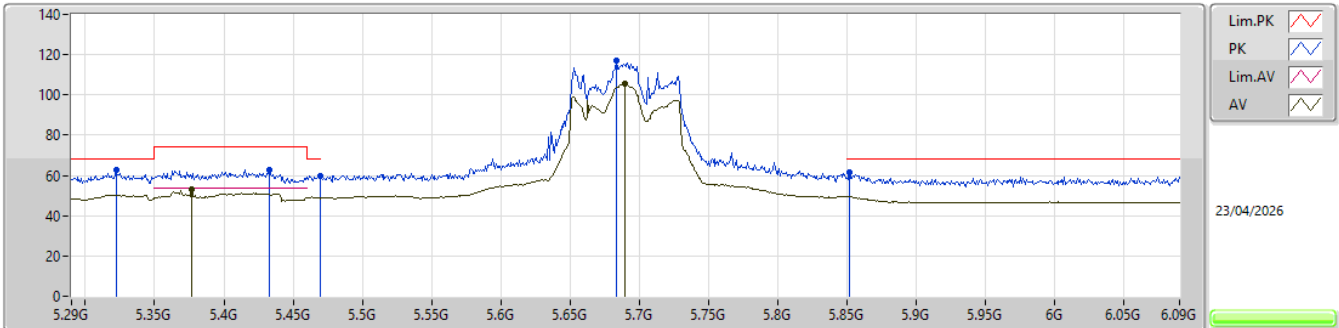


EUT_Y_4TX
Setting 28
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.322G	62.52	68.20	-5.68	52.53	3	Vertical	350.1	2.15	-	32.80	9.69	32.50			
AV	5.3764G	53.36	54.00	-0.64	43.43	3	Vertical	350.1	2.15	-	32.75	9.67	32.49			
PK	5.4332G	62.86	74.00	-11.14	52.92	3	Vertical	350.1	2.15	-	32.70	9.72	32.48			
PK	5.4692G	59.85	68.20	-8.35	49.79	3	Vertical	350.1	2.15	-	32.74	9.79	32.47			
PK	5.6836G	117.12	Inf	-Inf	106.45	3	Vertical	350.1	2.15	-	33.10	10.02	32.45			
AV	5.6892G	105.85	Inf	-Inf	95.14	3	Vertical	350.1	2.15	-	33.14	10.02	32.45			
PK	5.8516G	61.83	68.20	-6.37	50.32	3	Vertical	350.1	2.15	-	33.91	10.05	32.45			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

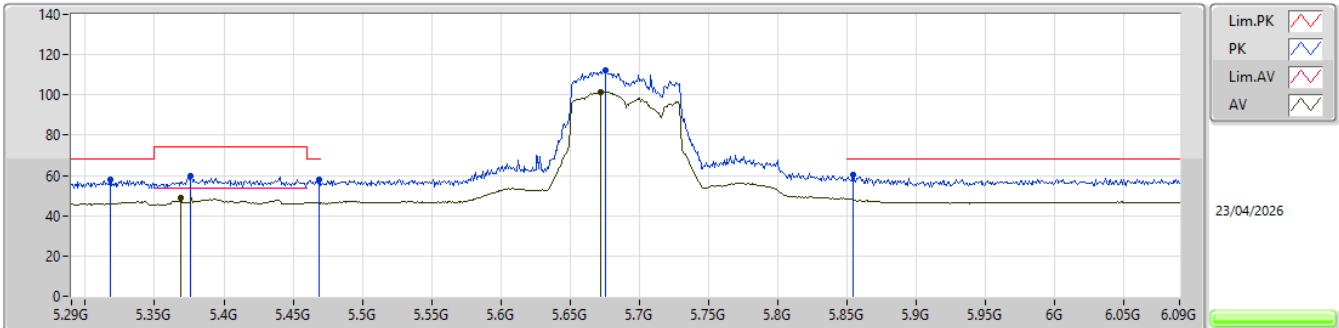


EUT_Y_4TX
Setting 28
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.318G	57.75	68.20	-10.45	47.76	3	Horizontal	58.5	1.80	-	32.80	9.69	32.50			
PK	5.3756G	59.61	74.00	-14.39	49.68	3	Horizontal	58.5	1.80	-	32.75	9.67	32.49			
AV	5.3692G	49.01	54.00	-4.99	39.07	3	Horizontal	58.5	1.80	-	32.76	9.67	32.49			
PK	5.4684G	57.77	68.20	-10.43	47.71	3	Horizontal	58.5	1.80	-	32.74	9.79	32.47			
PK	5.6756G	111.95	Inf	-Inf	101.33	3	Horizontal	58.5	1.80	-	33.05	10.02	32.45			
AV	5.6724G	101.68	Inf	-Inf	91.08	3	Horizontal	58.5	1.80	-	33.03	10.02	32.45			
PK	5.854G	60.23	68.20	-7.97	48.71	3	Horizontal	58.5	1.80	-	33.92	10.05	32.45			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5690MHz Straddle 5.47-5.725GHz_TX

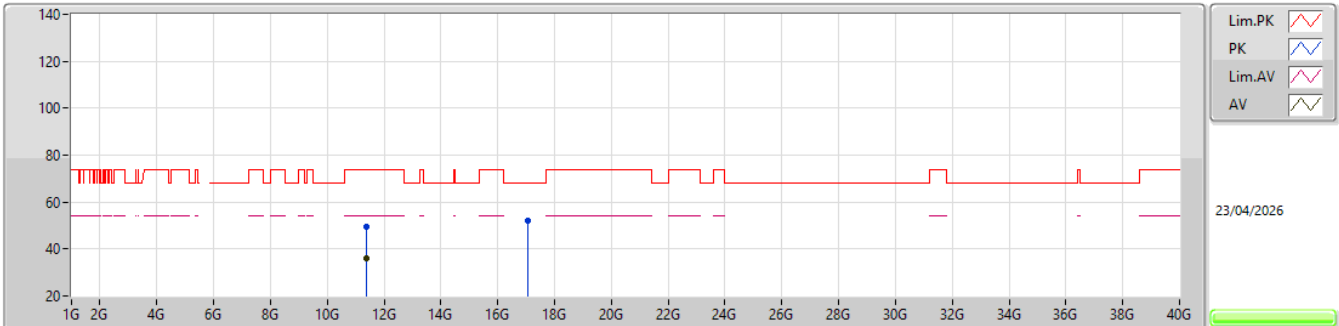EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.37663G	49.33	74.00	-24.67	41.31	3	Vertical	345	2.78	-	39.25	14.68	45.91			
AV	11.38043G	36.02	54.00	-17.98	28.01	3	Vertical	345	2.78	-	39.24	14.68	45.91			
PK	17.06514G	52.15	68.20	-16.05	42.88	3	Vertical	234	1.43	-	38.57	15.66	44.96			

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

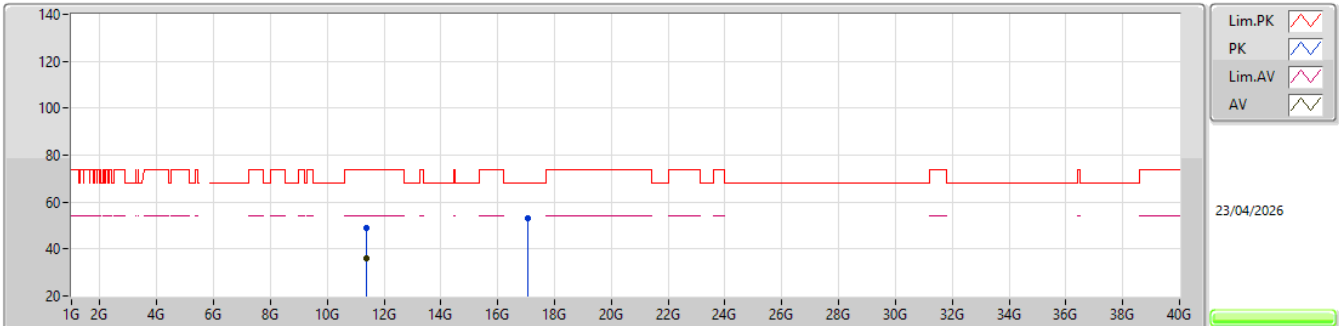


EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.37931G	49.02	74.00	-24.98	41.01	3	Horizontal	260	2.04	-	39.24	14.68	45.91			
AV	11.38327G	35.78	54.00	-18.22	27.78	3	Horizontal	260	2.04	-	39.23	14.68	45.91			
PK	17.07139G	53.22	68.20	-14.98	43.97	3	Horizontal	26	1.40	-	38.56	15.66	44.97			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5775MHz_TX

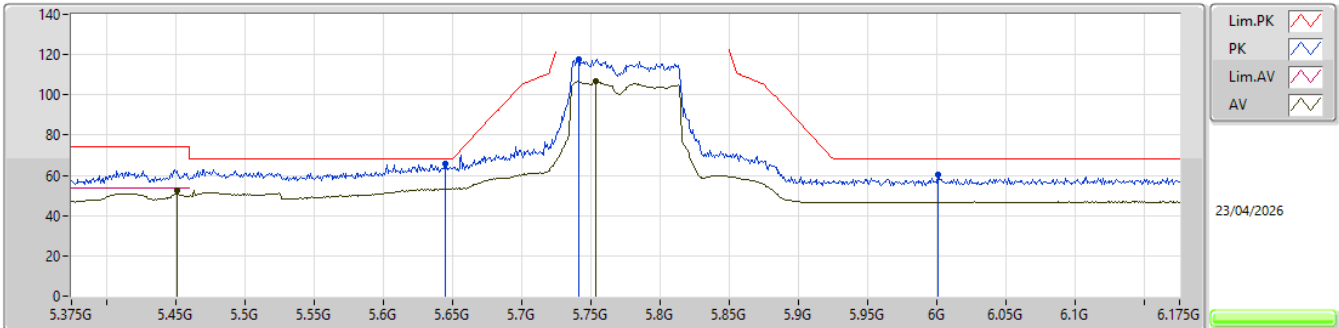


EUT_Y_4TX
Setting 28
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
AV	5.451G	52.43	54.00	-1.57	42.45	3	Vertical	157	2.65	-	32.70	9.75	32.47			
PK	5.6446G	65.53	68.20	-2.67	55.08	3	Vertical	157	2.65	-	32.88	10.02	32.45			
PK	5.7414G	117.59	Inf	-Inf	106.66	3	Vertical	157	2.65	-	33.37	10.01	32.45			
AV	5.7534G	106.72	Inf	-Inf	95.74	3	Vertical	157	2.65	-	33.42	10.01	32.45			
PK	6.0006G	60.05	68.20	-8.15	48.20	3	Vertical	157	2.65	-	34.10	10.19	32.44			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5775MHz_TX

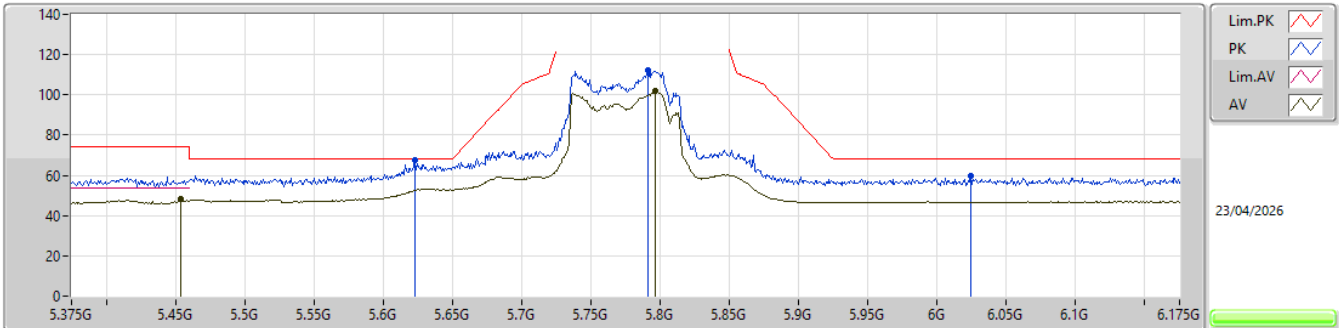


EUT_Y_4TX
Setting 28
01-E-I-1-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
AV	5.4542G	48.23	54.00	-5.77	38.23	3	Horizontal	192.9	1.80	-	32.71	9.76	32.47			
PK	5.623G	67.35	68.20	-0.85	56.99	3	Horizontal	192.9	1.80	-	32.79	10.03	32.46			
PK	5.791G	112.51	Inf	-Inf	101.31	3	Horizontal	192.9	1.80	-	33.65	10.00	32.45			
AV	5.7966G	101.70	Inf	-Inf	90.47	3	Horizontal	192.9	1.80	-	33.68	10.00	32.45			
PK	6.0246G	59.52	68.20	-8.68	47.65	3	Horizontal	192.9	1.80	-	34.10	10.21	32.44			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5775MHz_TX

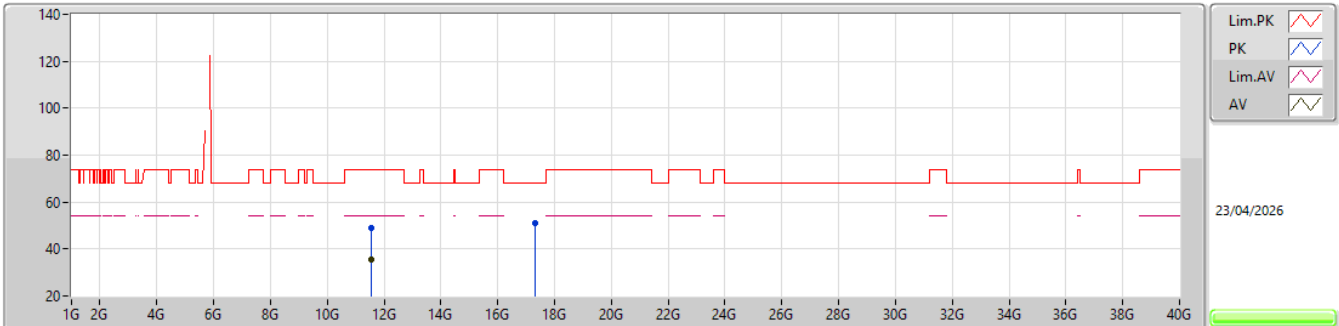EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55348G	49.22	74.00	-24.78	41.39	3	Vertical	261	2.14	-	38.88	14.77	45.82			
AV	11.54514G	35.75	54.00	-18.25	27.89	3	Vertical	261	2.14	-	38.91	14.77	45.82			
PK	17.32465G	51.03	68.20	-17.17	41.32	3	Vertical	147	2.58	-	39.15	15.73	45.17			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5775MHz_TX

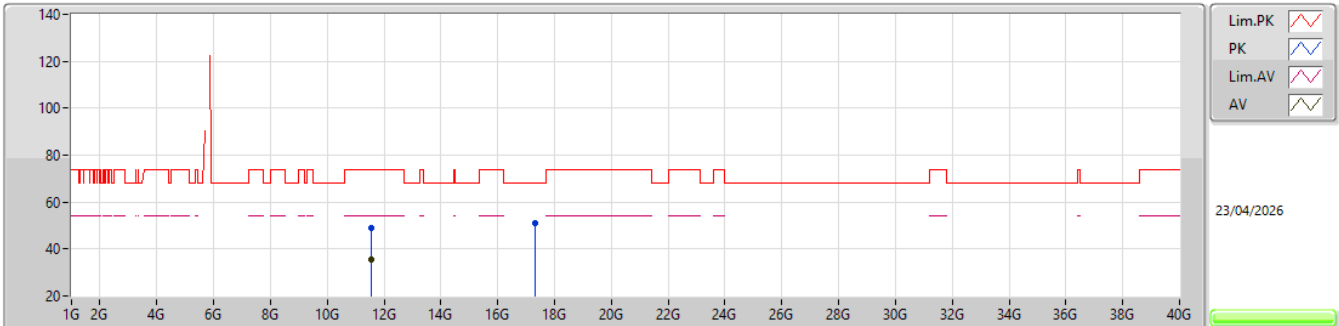EUT_Y_4TX
Setting 28
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55013G	49.11	74.00	-24.89	41.26	3	Horizontal	249	2.84	-	38.90	14.77	45.82			
AV	11.54546G	35.50	54.00	-18.50	27.64	3	Horizontal	249	2.84	-	38.91	14.77	45.82			
PK	17.32294G	51.02	68.20	-17.18	41.32	3	Horizontal	272	1.80	-	39.14	15.73	45.17			

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

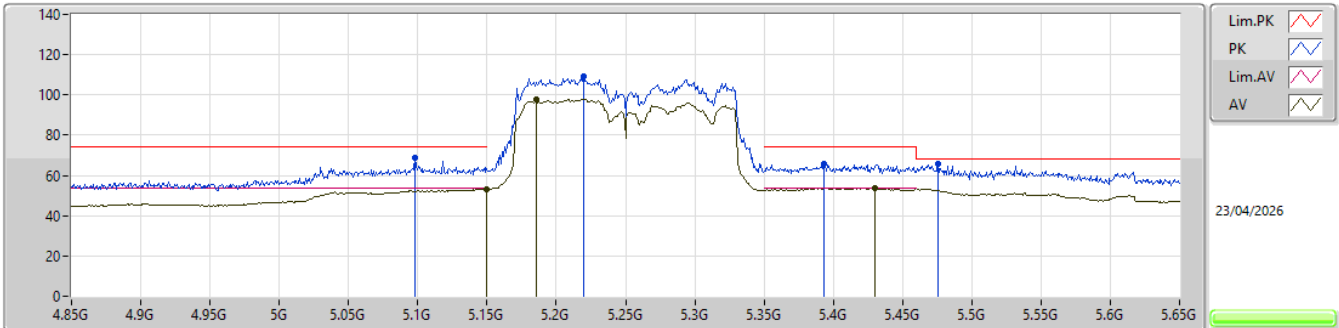


EUT_Y_4TX
Setting 25
01-E-I-1-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.098G	68.75	74.00	-5.25	58.72	3	Vertical	174	3.00	-	32.90	9.69	32.56					
AV	5.15G	53.23	54.00	-0.77	42.96	3	Vertical	174	3.00	-	33.10	9.71	32.54					
PK	5.2196G	109.49	Inf	-Inf	99.33	3	Vertical	174	3.00	-	32.96	9.73	32.53					
AV	5.1852G	97.95	Inf	-Inf	87.73	3	Vertical	174	3.00	-	33.03	9.73	32.54					
PK	5.3932G	65.62	74.00	-8.38	55.74	3	Vertical	174	3.00	-	32.71	9.66	32.49					
AV	5.43G	53.69	54.00	-0.31	43.75	3	Vertical	174	3.00	-	32.70	9.72	32.48					
PK	5.4756G	65.62	68.20	-2.58	55.54	3	Vertical	174	3.00	-	32.75	9.80	32.47					

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

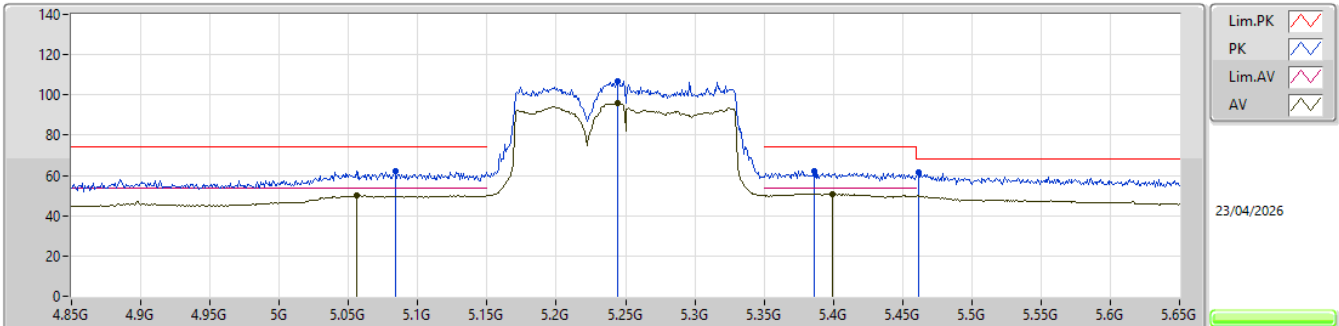


EUT_Y_4TX
Setting 25
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.0836G	62.34	74.00	-11.66	52.32	3	Horizontal	154	1.80	-	32.90	9.68	32.56
AV	5.0556G	49.89	54.00	-4.11	39.89	3	Horizontal	154	1.80	-	32.90	9.67	32.57
PK	5.2444G	107.01	Inf	-Inf	96.90	3	Horizontal	154	1.80	-	32.91	9.72	32.52
AV	5.2444G	95.84	Inf	-Inf	85.73	3	Horizontal	154	1.80	-	32.91	9.72	32.52
PK	5.386G	62.45	74.00	-11.55	52.54	3	Horizontal	154	1.80	-	32.73	9.67	32.49
AV	5.3996G	50.90	54.00	-3.10	41.02	3	Horizontal	154	1.80	-	32.70	9.66	32.48
PK	5.4612G	61.80	68.20	-6.40	51.78	3	Horizontal	154	1.80	-	32.72	9.77	32.47

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

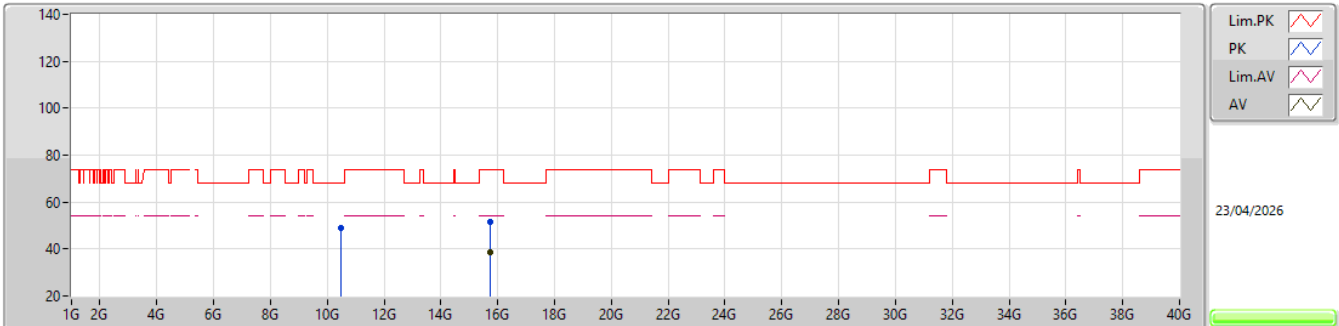


EUT_Y_4TX
Setting 25
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50179G	49.00	68.20	-19.20	41.51	3	Vertical	260	3.00	-	38.60	14.20	45.31			
PK	15.74913G	51.53	74.00	-22.47	41.65	3	Vertical	219	2.24	-	37.90	15.37	43.39			
AV	15.74514G	38.51	54.00	-15.49	28.63	3	Vertical	219	2.24	-	37.89	15.37	43.38			

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

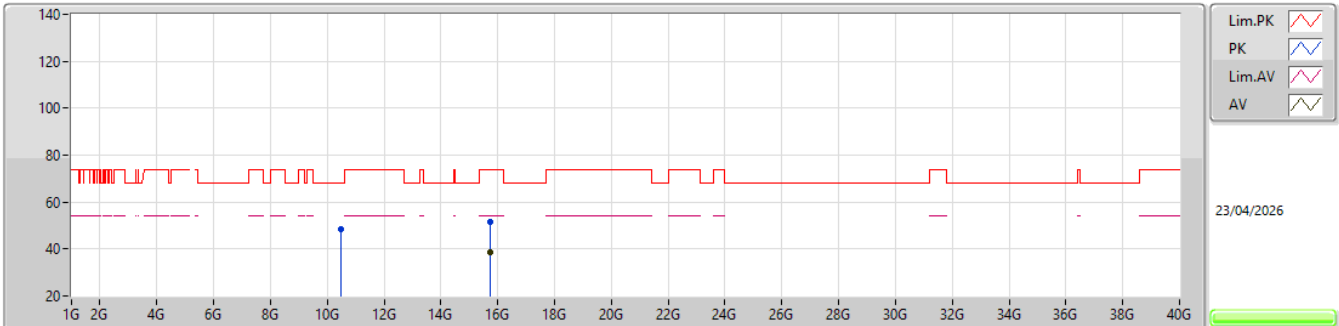


EUT_Y_4TX
Setting 25
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50313G	48.56	68.20	-19.64	41.08	3	Horizontal	172	2.41	-	38.60	14.20	45.32			
PK	15.75075G	51.46	74.00	-22.54	41.59	3	Horizontal	32	2.36	-	37.89	15.37	43.39			
AV	15.745G	38.37	54.00	-15.63	28.49	3	Horizontal	32	2.36	-	37.89	15.37	43.38			

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5570MHz_TX

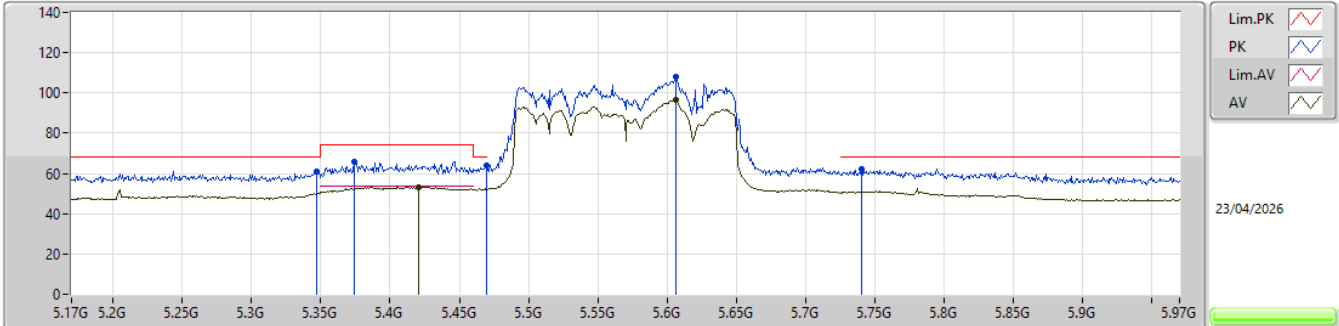


EUT_Y_4TX
Setting 23
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3468G	61.01	68.20	-7.19	51.03	3	Vertical	166.9	3.00	-	32.80	9.68	32.50
PK	5.374G	65.99	74.00	-8.01	56.06	3	Vertical	166.9	3.00	-	32.75	9.67	32.49
AV	5.4204G	53.31	54.00	-0.69	43.39	3	Vertical	166.9	3.00	-	32.70	9.70	32.48
PK	5.47G	63.89	68.20	-4.31	53.83	3	Vertical	166.9	3.00	-	32.74	9.79	32.47
PK	5.6068G	107.80	Inf	-Inf	97.50	3	Vertical	166.9	3.00	-	32.73	10.03	32.46
AV	5.606G	96.58	Inf	-Inf	86.29	3	Vertical	166.9	3.00	-	32.72	10.03	32.46
PK	5.7404G	62.05	68.20	-6.15	51.13	3	Vertical	166.9	3.00	-	33.36	10.01	32.45

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5570MHz_TX

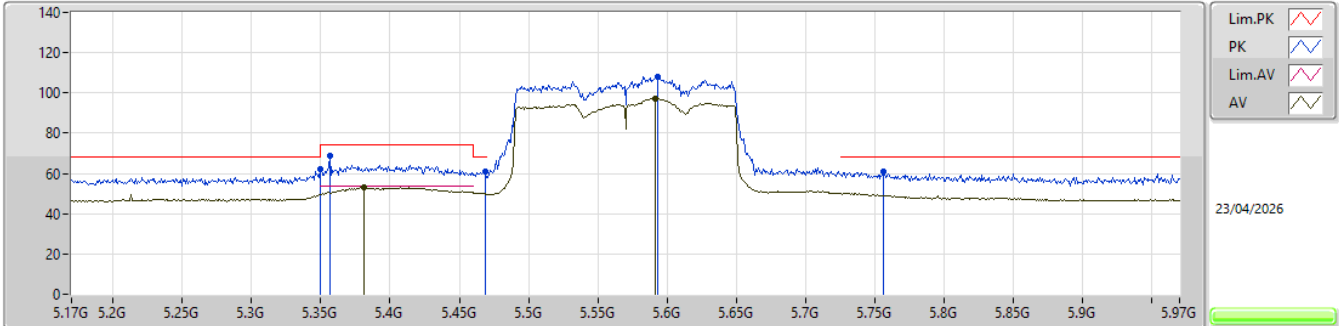


EUT_Y_4TX
Setting 23
01-E-I-1-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3492G	62.42	68.20	-5.78	52.44	3	Horizontal	130	1.80	-	32.80	9.68	32.50				
PK	5.3564G	68.91	74.00	-5.09	58.93	3	Horizontal	130	1.80	-	32.79	9.68	32.49				
AV	5.3812G	53.01	54.00	-0.99	43.09	3	Horizontal	130	1.80	-	32.74	9.67	32.49				
PK	5.4684G	60.88	68.20	-7.32	50.82	3	Horizontal	130	1.80	-	32.74	9.79	32.47				
PK	5.5932G	108.00	Inf	-Inf	97.74	3	Horizontal	130	1.80	-	32.70	10.02	32.46				
AV	5.5916G	97.22	Inf	-Inf	86.97	3	Horizontal	130	1.80	-	32.70	10.01	32.46				
PK	5.7564G	60.73	68.20	-7.47	49.73	3	Horizontal	130	1.80	-	33.44	10.01	32.45				

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX


5570MHz_TX

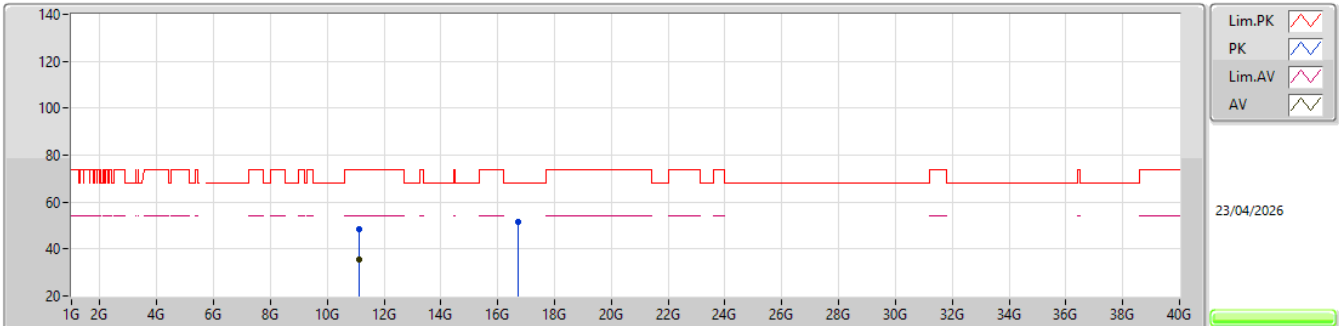EUT_Y_4TX
Setting 23
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14084G	48.46	74.00	-25.54	41.15	3	Vertical	86	1.76	-	38.88	14.55	46.12			
AV	11.13769G	35.69	54.00	-18.31	28.39	3	Vertical	86	1.76	-	38.88	14.55	46.13			
PK	16.70768G	51.36	68.20	-16.84	42.01	3	Vertical	331	2.59	-	38.48	15.57	44.70			

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

5570MHz_TX

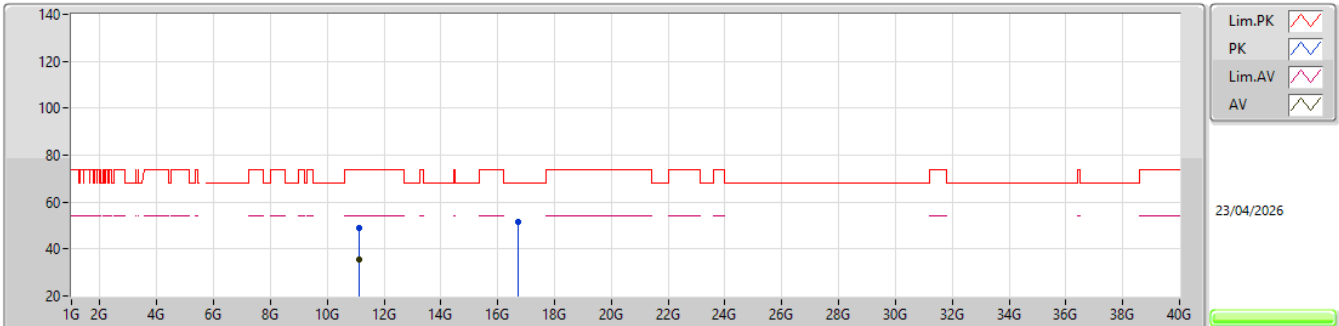

EUT_Y_4TX
Setting 23
01-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.13978G	48.76	74.00	-25.24	41.45	3	Horizontal	229	2.26	-	38.88	14.55	46.12			
AV	11.13539G	35.37	54.00	-18.63	28.09	3	Horizontal	229	2.26	-	38.87	14.54	46.13			
PK	16.71444G	51.34	68.20	-16.86	42.00	3	Horizontal	112	2.33	-	38.47	15.57	44.70			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
802.11be EHT160_Nss1,(MCS0),RU966+RU484 MRU 2_4TX	Pass	AV	5.406G	53.97	54.00	-0.03	3	Vertical	353	2.96	-

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

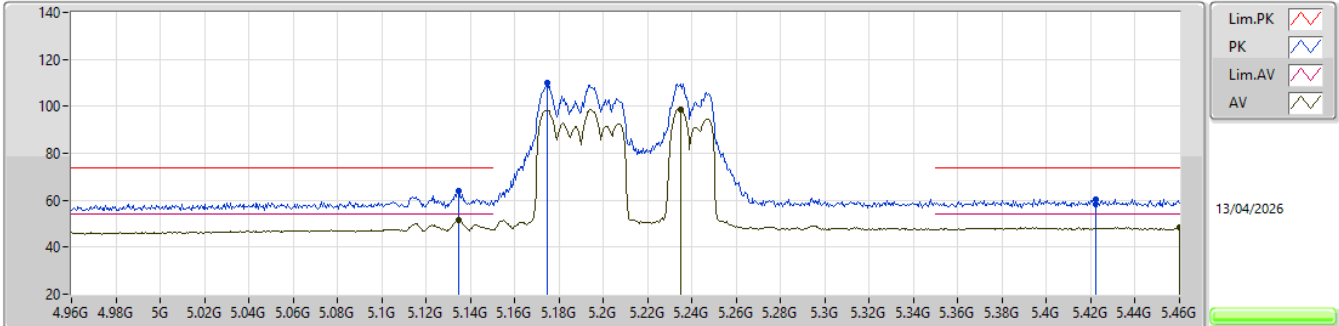


EUT_Y_4TX
Setting 6.5/12.5
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1345G	63.88	74.00	-10.12	57.71	3	Vertical	350	2.99	-	34.10	7.00	34.93			
AV	5.1345G	51.63	54.00	-2.37	45.46	3	Vertical	350	2.99	-	34.10	7.00	34.93			
PK	5.1745G	109.81	Inf	-Inf	103.60	3	Vertical	350	2.99	-	34.10	7.04	34.93			
AV	5.235G	98.86	Inf	-Inf	92.45	3	Vertical	350	2.99	-	34.24	7.08	34.91			
PK	5.422G	60.47	74.00	-13.53	53.43	3	Vertical	350	2.99	-	34.70	7.22	34.88			
AV	5.46G	48.70	54.00	-5.30	41.62	3	Vertical	350	2.99	-	34.70	7.25	34.87			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5210MHz_TX

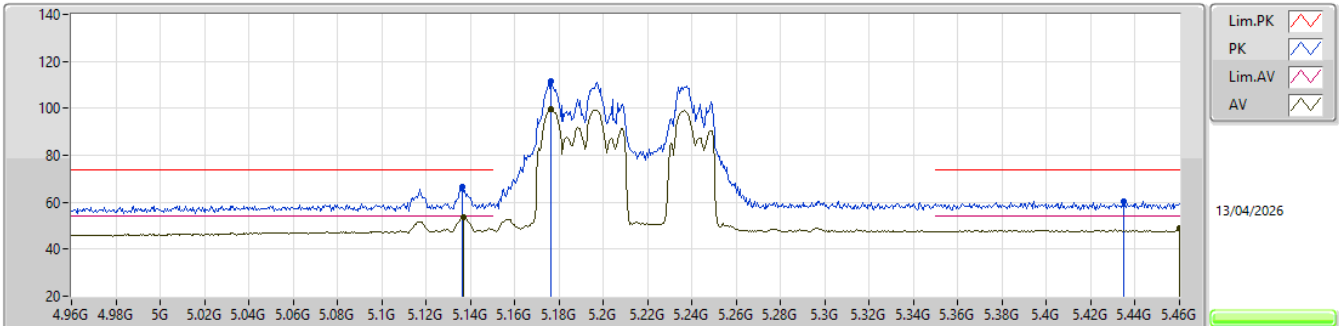EUT Y_4TX
Setting 6.5/12.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1365G	66.33	74.00	-7.67	60.16	3	Horizontal	342	1.79	-	34.10	7.00	34.93
AV	5.137G	53.52	54.00	-0.48	47.35	3	Horizontal	342	1.79	-	34.10	7.00	34.93
PK	5.1765G	111.49	Inf	-Inf	105.27	3	Horizontal	342	1.79	-	34.10	7.04	34.92
AV	5.1765G	99.61	Inf	-Inf	93.39	3	Horizontal	342	1.79	-	34.10	7.04	34.92
PK	5.435G	60.41	74.00	-13.59	53.35	3	Horizontal	342	1.79	-	34.70	7.23	34.87
AV	5.46G	48.90	54.00	-5.10	41.82	3	Horizontal	342	1.79	-	34.70	7.25	34.87

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5210MHz_TX

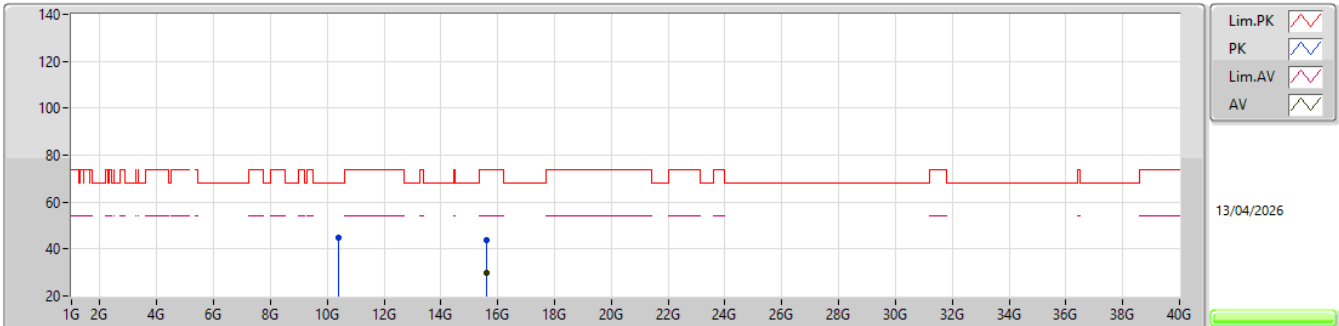EUT_Y_4TX
Setting 6.5/12.5
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41052G	44.70	68.20	-23.50	63.08	3	Vertical	2	1.71	-	38.02	10.39	66.79			
PK	15.62748G	43.69	74.00	-30.31	57.30	3	Vertical	355	1.01	-	38.10	12.23	63.94			
AV	15.61905G	30.05	54.00	-23.95	43.66	3	Vertical	355	1.01	-	38.10	12.23	63.94			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5210MHz_TX

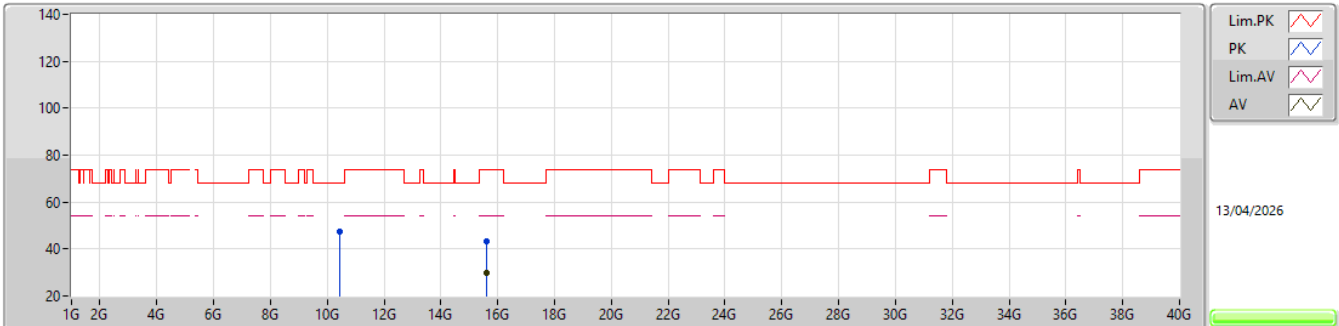EUT_Y_4TX
Setting 6.5/12.5
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42G	47.16	68.20	-21.04	65.50	3	Horizontal	292	2.69	-	38.04	10.40	66.78			
PK	15.61884G	43.34	74.00	-30.66	56.95	3	Horizontal	223	1.00	-	38.10	12.23	63.94			
AV	15.61671G	30.06	54.00	-23.94	43.67	3	Horizontal	223	1.00	-	38.10	12.23	63.94			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5210MHz_TX

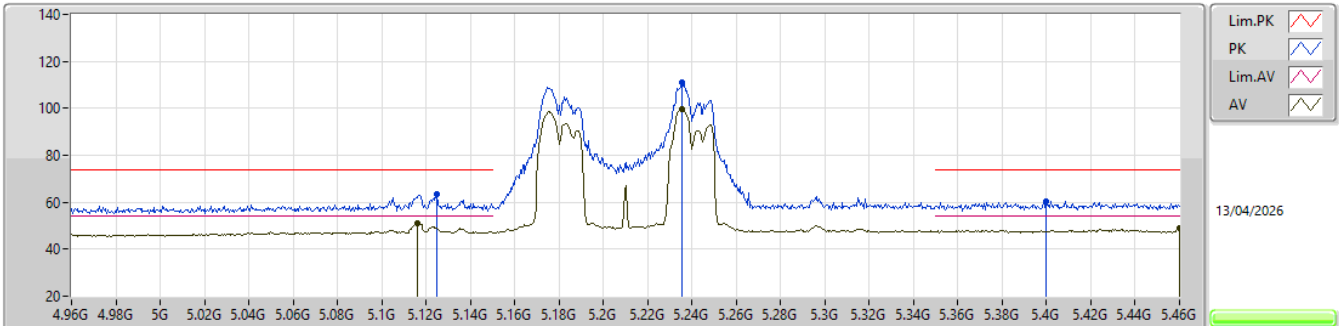EUT_Y_4TX
Setting 7.5/11.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.125G	63.45	74.00	-10.55	57.30	3	Vertical	352	2.79	-	34.10	6.99	34.94
AV	5.116G	51.08	54.00	-2.92	44.94	3	Vertical	352	2.79	-	34.10	6.98	34.94
PK	5.2355G	110.86	Inf	-Inf	104.45	3	Vertical	352	2.79	-	34.24	7.08	34.91
AV	5.2355G	99.82	Inf	-Inf	93.41	3	Vertical	352	2.79	-	34.24	7.08	34.91
PK	5.4G	60.57	74.00	-13.43	53.55	3	Vertical	352	2.79	-	34.70	7.20	34.88
AV	5.46G	48.75	54.00	-5.25	41.67	3	Vertical	352	2.79	-	34.70	7.25	34.87

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5210MHz_TX

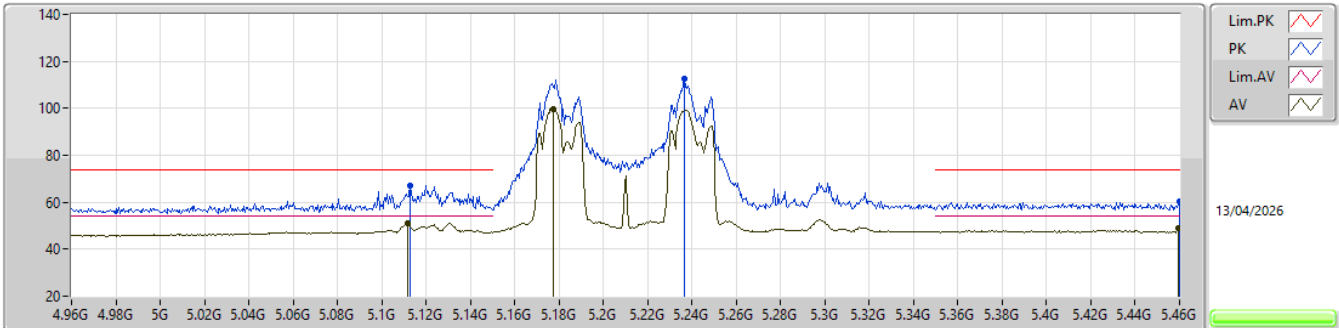EUT_Y_4TX
Setting 7.5/11.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.113G	67.22	74.00	-6.78	61.08	3	Horizontal	344	1.80	-	34.10	6.98	34.94
AV	5.1115G	50.97	54.00	-3.03	44.83	3	Horizontal	344	1.80	-	34.10	6.98	34.94
PK	5.2365G	112.83	Inf	-Inf	106.40	3	Horizontal	344	1.80	-	34.25	7.09	34.91
AV	5.1775G	99.78	Inf	-Inf	93.56	3	Horizontal	344	1.80	-	34.10	7.04	34.92
PK	5.46G	60.51	74.00	-13.49	53.43	3	Horizontal	344	1.80	-	34.70	7.25	34.87
AV	5.4595G	48.93	54.00	-5.07	41.86	3	Horizontal	344	1.80	-	34.70	7.24	34.87

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5210MHz_TX

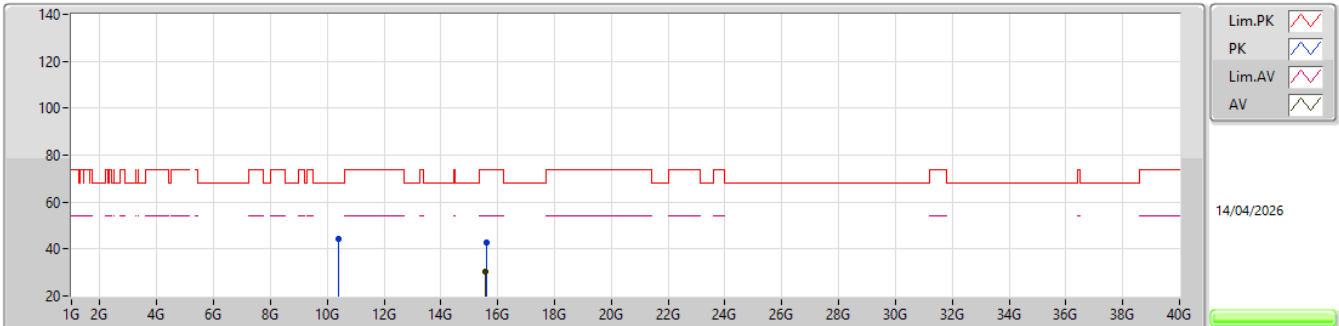


EUT_Y_4TX
Setting 7.5/11.5
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.4174G	44.47	68.20	-23.73	62.82	3	Vertical	11	1.80	-	38.03	10.40	66.78			
PK	15.6022G	42.97	74.00	-31.03	56.59	3	Vertical	19	2.27	-	38.10	12.22	63.94			
AV	15.5861G	30.59	54.00	-23.41	44.19	3	Vertical	19	2.27	-	38.13	12.21	63.94			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5210MHz_TX

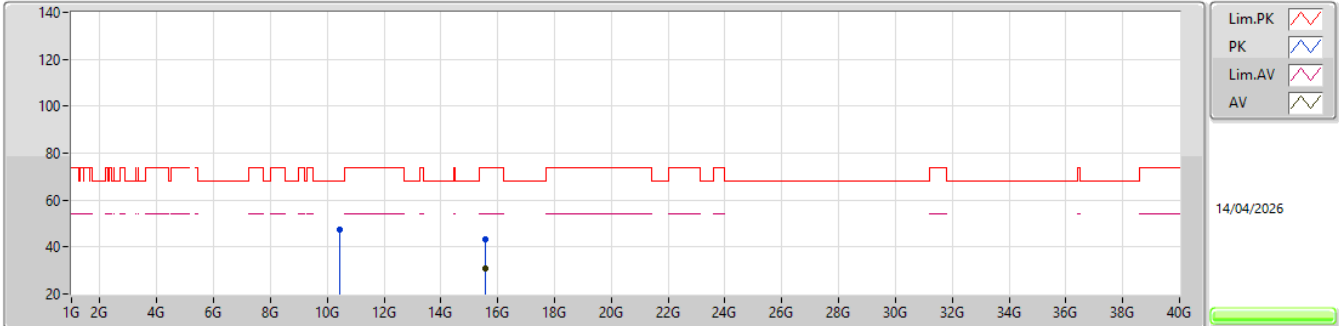


EUT_Y_4TX
Setting 7.5/11.5
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4202G	47.30	68.20	-20.90	65.64	3	Horizontal	312	1.54	-	38.04	10.40	66.78			
PK	15.5868G	43.40	74.00	-30.60	57.00	3	Horizontal	229	2.21	-	38.13	12.21	63.94			
AV	15.5813G	30.80	54.00	-23.20	44.39	3	Horizontal	229	2.21	-	38.14	12.21	63.94			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5290MHz_TX

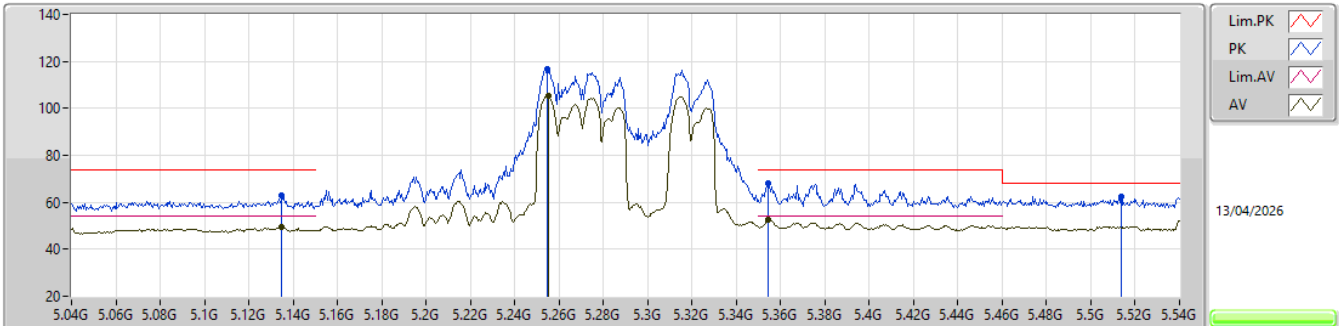EUT_Y_4TX
Setting -4.5/19
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.135G	62.70	74.00	-11.30	56.53	3	Vertical	351	2.96	-	34.10	7.00	34.93			
AV	5.135G	49.48	54.00	-4.52	43.31	3	Vertical	351	2.96	-	34.10	7.00	34.93			
PK	5.2545G	116.95	Inf	-Inf	110.43	3	Vertical	351	2.96	-	34.33	7.10	34.91			
AV	5.255G	105.50	Inf	-Inf	98.98	3	Vertical	351	2.96	-	34.33	7.10	34.91			
PK	5.3545G	68.04	74.00	-5.96	61.15	3	Vertical	351	2.96	-	34.61	7.17	34.89			
AV	5.3545G	52.80	54.00	-1.20	45.91	3	Vertical	351	2.96	-	34.61	7.17	34.89			
PK	5.5135G	62.50	68.20	-5.70	55.42	3	Vertical	351	2.96	-	34.65	7.29	34.86			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5290MHz_TX

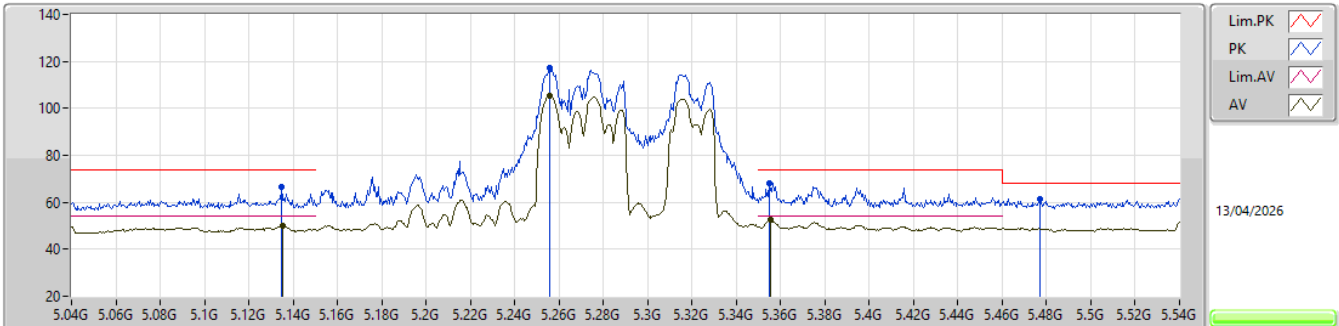EUT_Y_4TX
Setting -4.5/19
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.135G	66.37	74.00	-7.63	60.20	3	Horizontal	341	1.91	-	34.10	7.00	34.93			
AV	5.1355G	50.07	54.00	-3.93	43.90	3	Horizontal	341	1.91	-	34.10	7.00	34.93			
PK	5.2555G	116.99	Inf	-Inf	110.47	3	Horizontal	341	1.91	-	34.33	7.10	34.91			
AV	5.256G	105.46	Inf	-Inf	98.93	3	Horizontal	341	1.91	-	34.34	7.10	34.91			
PK	5.355G	68.10	74.00	-5.90	61.21	3	Horizontal	341	1.91	-	34.61	7.17	34.89			
AV	5.3555G	52.53	54.00	-1.47	45.64	3	Horizontal	341	1.91	-	34.61	7.17	34.89			
PK	5.477G	61.31	68.20	-6.89	54.21	3	Horizontal	341	1.91	-	34.70	7.26	34.86			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5290MHz_TX

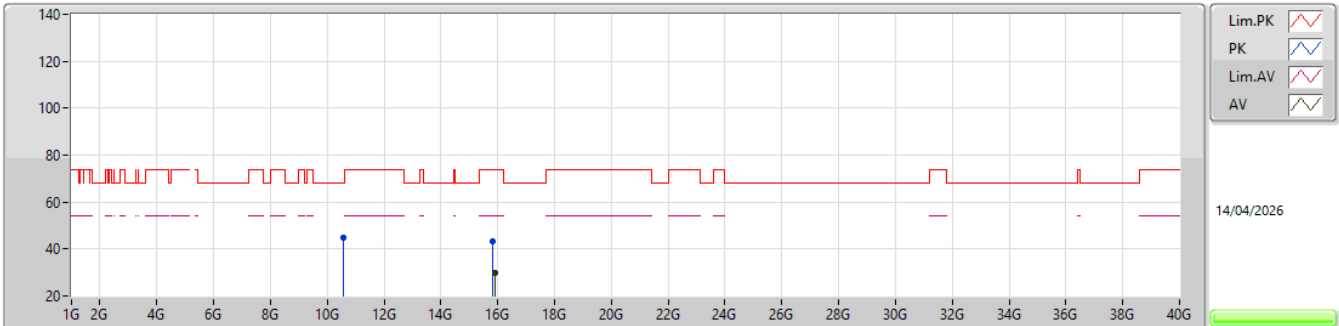EUT_Y_4TX
Setting -4.5/19
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58G	44.72	68.20	-23.48	62.59	3	Vertical	339	1.30	-	38.26	10.45	66.58			
PK	15.8415G	43.16	74.00	-30.84	57.26	3	Vertical	278	2.53	-	37.53	12.33	63.96			
AV	15.9005G	29.65	54.00	-24.35	43.66	3	Vertical	278	2.53	-	37.60	12.35	63.96			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5290MHz_TX

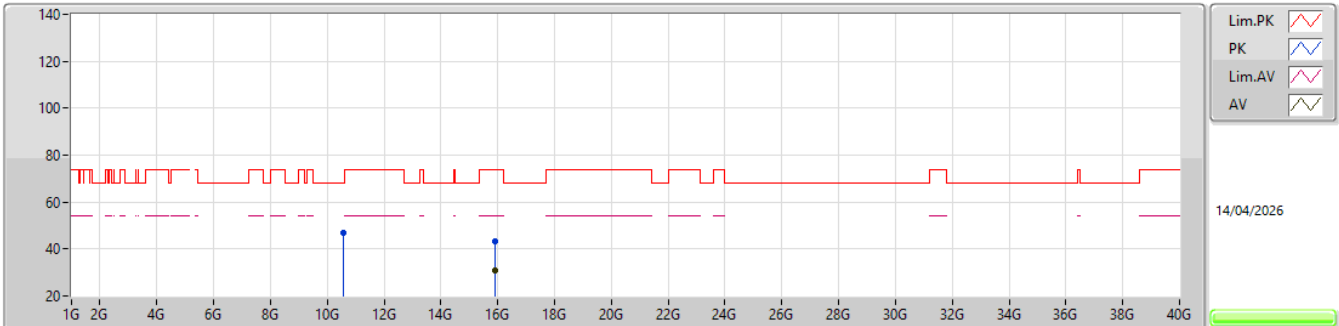EUT_Y_4TX
Setting -4.5/19
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5798G	46.83	68.20	-21.37	64.70	3	Horizontal	298	2.46	-	38.26	10.45	66.58			
PK	15.8993G	43.49	74.00	-30.51	57.50	3	Horizontal	274	1.81	-	37.60	12.35	63.96			
AV	15.9129G	30.63	54.00	-23.37	44.60	3	Horizontal	274	1.81	-	37.63	12.36	63.96			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5290MHz_TX

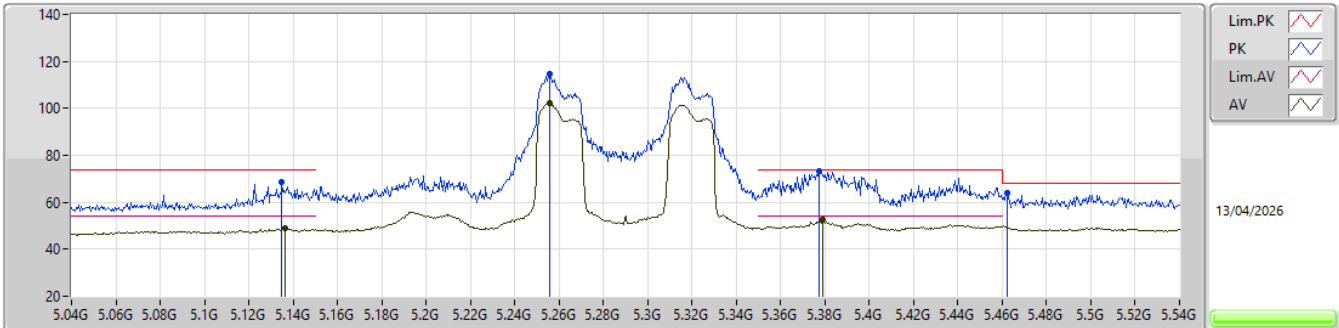EUT_Y_4TX
Setting 9.5/5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.135G	68.64	74.00	-5.36	62.47	3	Vertical	352	2.79	-	34.10	7.00	34.93			
AV	5.1365G	48.92	54.00	-5.08	42.75	3	Vertical	352	2.79	-	34.10	7.00	34.93			
PK	5.256G	114.71	Inf	-Inf	108.18	3	Vertical	352	2.79	-	34.34	7.10	34.91			
AV	5.256G	102.01	Inf	-Inf	95.48	3	Vertical	352	2.79	-	34.34	7.10	34.91			
PK	5.3775G	73.41	74.00	-0.59	66.45	3	Vertical	352	2.79	-	34.66	7.18	34.88			
AV	5.379G	52.35	54.00	-1.65	45.38	3	Vertical	352	2.79	-	34.66	7.19	34.88			
PK	5.4625G	63.89	68.20	-4.31	56.81	3	Vertical	352	2.79	-	34.70	7.25	34.87			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5290MHz_TX

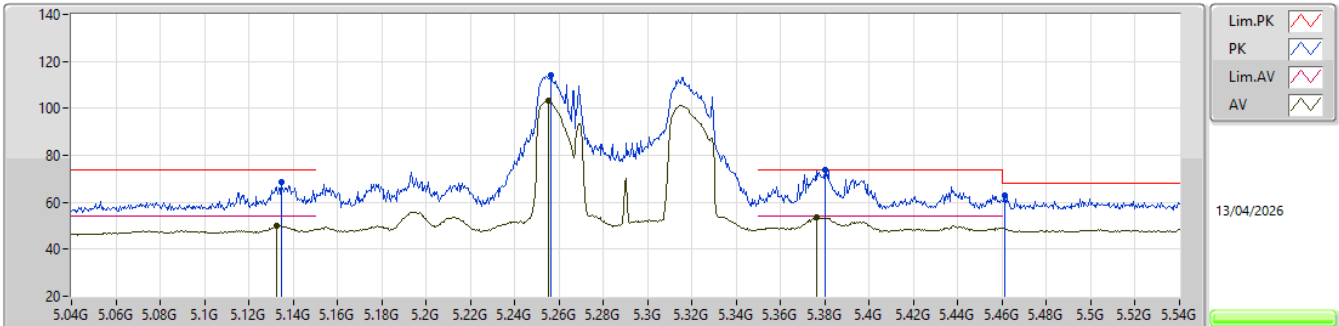EUT_Y_4TX
Setting 9.5/5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1345G	68.86	74.00	-5.14	62.69	3	Horizontal	338	1.92	-	34.10	7.00	34.93			
AV	5.1325G	50.06	54.00	-3.94	43.89	3	Horizontal	338	1.92	-	34.10	7.00	34.93			
PK	5.2565G	114.25	Inf	-Inf	107.72	3	Horizontal	338	1.92	-	34.34	7.10	34.91			
AV	5.255G	103.02	Inf	-Inf	96.50	3	Horizontal	338	1.92	-	34.33	7.10	34.91			
PK	5.38G	73.59	74.00	-0.41	66.62	3	Horizontal	338	1.92	-	34.66	7.19	34.88			
AV	5.376G	53.57	54.00	-0.43	46.62	3	Horizontal	338	1.92	-	34.65	7.18	34.88			
PK	5.461G	62.82	68.20	-5.38	55.74	3	Horizontal	338	1.92	-	34.70	7.25	34.87			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5290MHz_TX

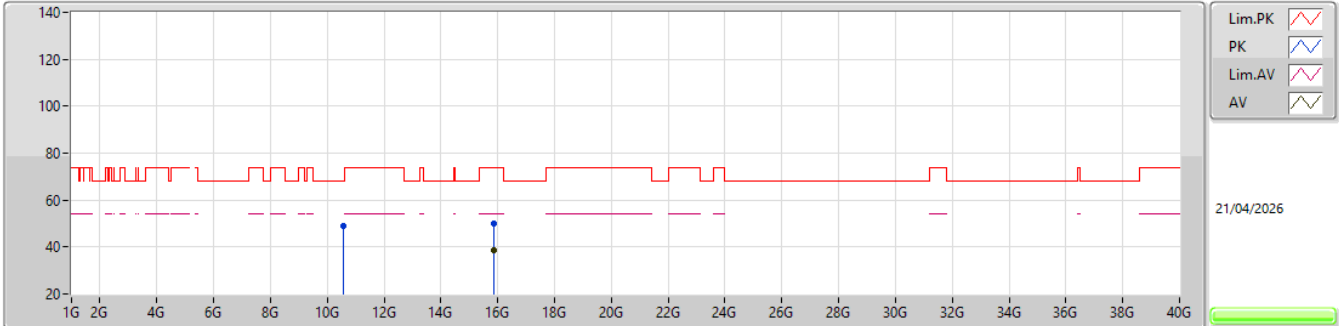


EUT_Y_4TX
Setting 9.5/5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.56977G	49.09	68.20	-19.11	43.26	3	Vertical	266	1.88	-	39.20	12.07	45.44			
PK	15.87462G	49.86	74.00	-24.14	40.14	3	Vertical	149	1.62	-	38.65	14.72	43.65			
AV	15.87996G	38.55	54.00	-15.45	28.80	3	Vertical	149	1.62	-	38.68	14.73	43.66			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5290MHz_TX

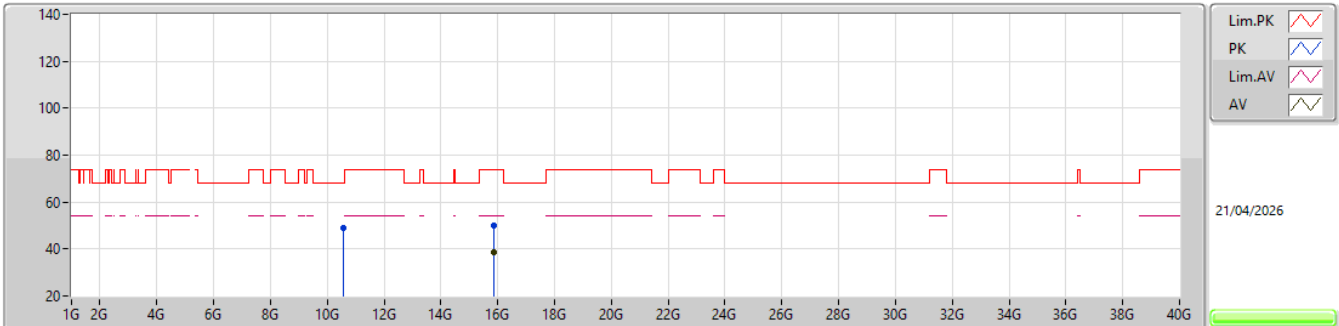EUT_Y_4TX
Setting 9.5/5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5812G	49.02	68.20	-19.18	43.21	3	Horizontal	336	1.88	-	39.20	12.07	45.46			
PK	15.87999G	50.01	74.00	-23.99	40.26	3	Horizontal	40	1.92	-	38.68	14.73	43.66			
AV	15.8799G	38.37	54.00	-15.63	28.62	3	Horizontal	40	1.92	-	38.68	14.73	43.66			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5530MHz_TX

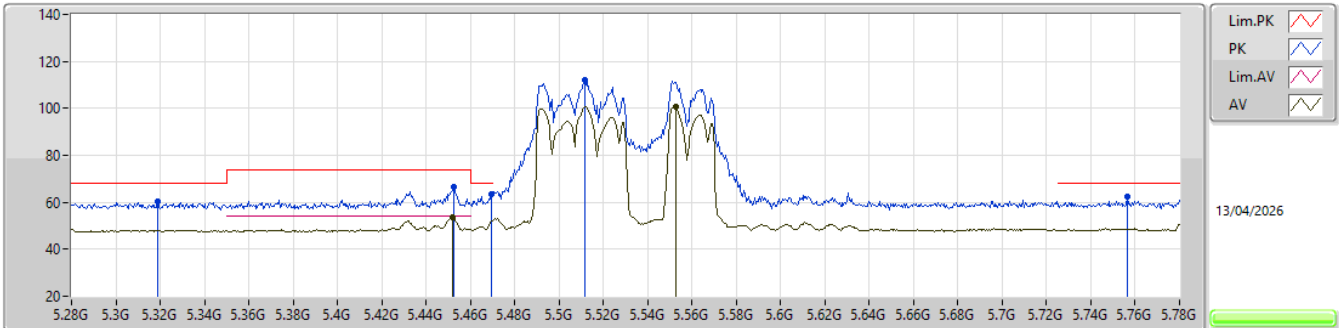EUT_Y_4TX
Setting -0.5/14
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.319G	60.50	68.20	-7.70	53.66	3	Vertical	343	2.81	-	34.60	7.14	34.90			
PK	5.4525G	66.34	74.00	-7.66	59.27	3	Vertical	343	2.81	-	34.70	7.24	34.87			
AV	5.452G	53.59	54.00	-0.41	46.52	3	Vertical	343	2.81	-	34.70	7.24	34.87			
PK	5.4695G	63.43	68.20	-4.77	56.35	3	Vertical	343	2.81	-	34.70	7.25	34.87			
PK	5.5115G	111.89	Inf	-Inf	104.82	3	Vertical	343	2.81	-	34.65	7.28	34.86			
AV	5.5525G	100.78	Inf	-Inf	93.84	3	Vertical	343	2.81	-	34.51	7.31	34.88			
PK	5.7565G	62.19	68.20	-6.01	55.36	3	Vertical	343	2.81	-	34.29	7.48	34.94			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

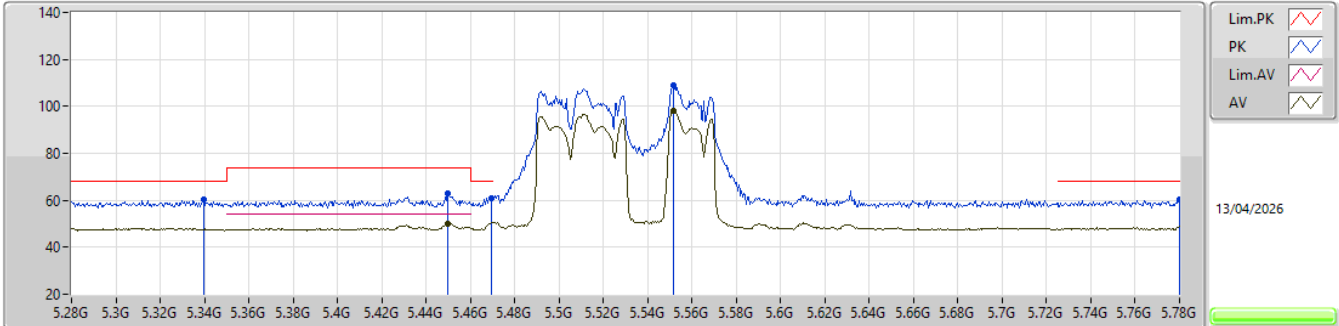


EUT_Y_4TX
Setting -0.5/14
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3395G	60.18	68.20	-8.02	53.31	3	Horizontal	351	1.80	-	34.60	7.16	34.89			
PK	5.4495G	62.79	74.00	-11.21	55.72	3	Horizontal	351	1.80	-	34.70	7.24	34.87			
AV	5.45G	50.25	54.00	-3.75	43.18	3	Horizontal	351	1.80	-	34.70	7.24	34.87			
PK	5.4695G	60.97	68.20	-7.23	53.89	3	Horizontal	351	1.80	-	34.70	7.25	34.87			
PK	5.5515G	108.97	Inf	-Inf	102.04	3	Horizontal	351	1.80	-	34.50	7.31	34.88			
AV	5.5515G	98.06	Inf	-Inf	91.13	3	Horizontal	351	1.80	-	34.50	7.31	34.88			
PK	5.78G	60.21	68.20	-7.99	53.42	3	Horizontal	351	1.80	-	34.24	7.49	34.94			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5530MHz_TX

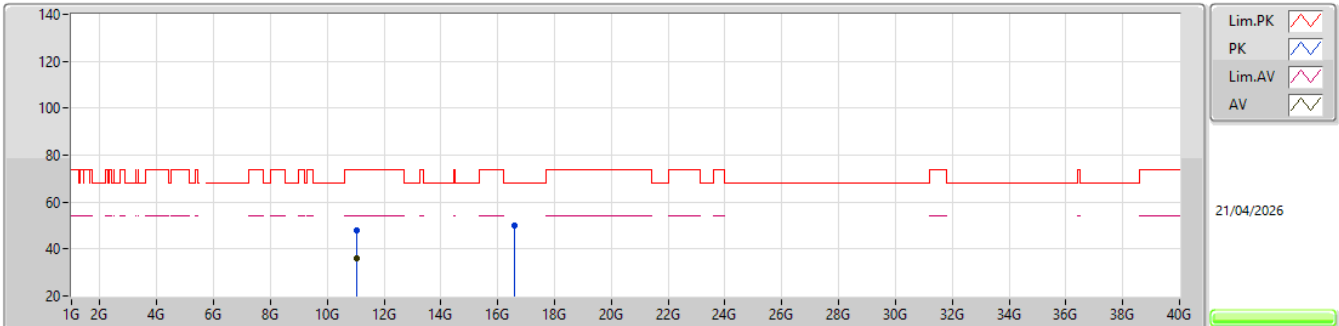EUT_Y_4TX
Setting -0.5/14
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.04623G	47.93	74.00	-26.07	42.63	3	Vertical	108	1.69	-	39.20	12.31	46.21			
AV	11.05313G	36.04	54.00	-17.96	30.74	3	Vertical	108	1.69	-	39.19	12.31	46.20			
PK	16.58928G	49.83	68.20	-18.37	39.79	3	Vertical	245	1.32	-	39.70	14.95	44.61			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

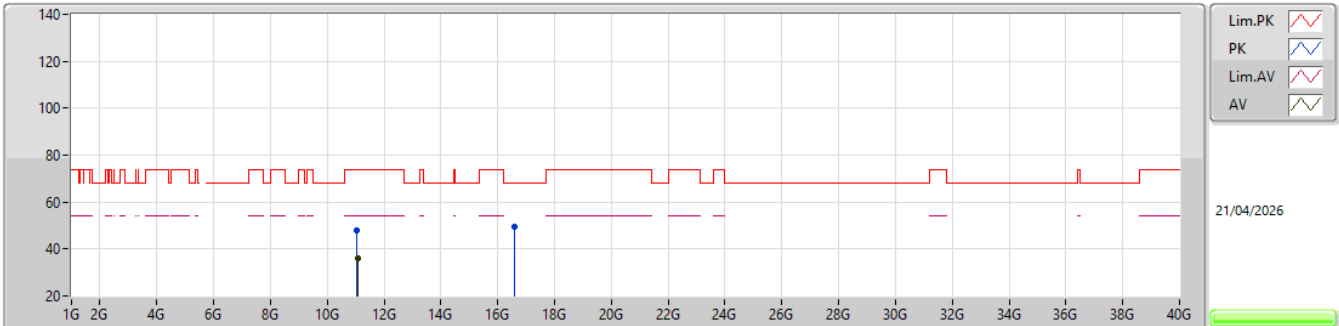


EUT_Y_4TX
Setting -0.5/14
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05949G	47.71	74.00	-26.29	42.41	3	Horizontal	100	1.54	-	39.18	12.32	46.20			
AV	11.05985G	36.03	54.00	-17.97	30.73	3	Horizontal	100	1.54	-	39.18	12.32	46.20			
PK	16.59183G	49.73	68.20	-18.47	39.70	3	Horizontal	90	2.06	-	39.70	14.95	44.62			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5530MHz_TX

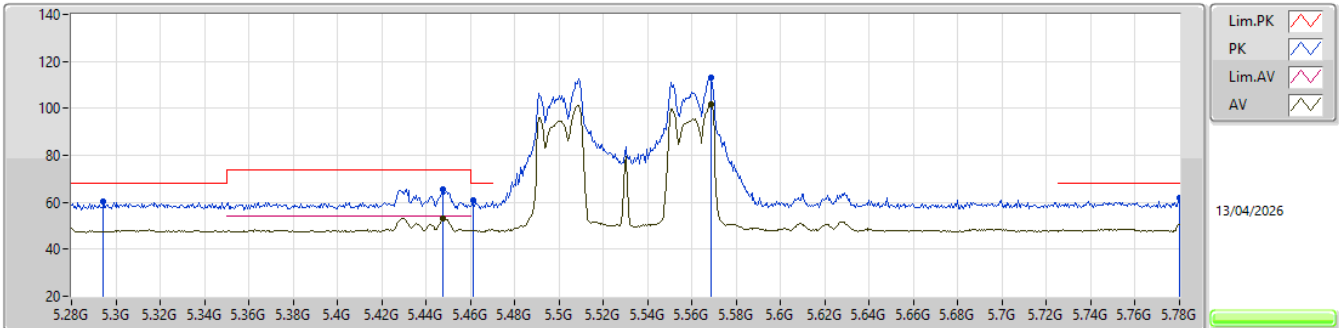EUT_Y_4TX
Setting 0.5/13
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2945G	60.09	68.20	-8.11	53.29	3	Vertical	335	2.90	-	34.57	7.13	34.90			
PK	5.4475G	65.59	74.00	-8.41	58.52	3	Vertical	335	2.90	-	34.70	7.24	34.87			
AV	5.4475G	53.05	54.00	-0.95	45.98	3	Vertical	335	2.90	-	34.70	7.24	34.87			
PK	5.461G	60.70	68.20	-7.50	53.62	3	Vertical	335	2.90	-	34.70	7.25	34.87			
PK	5.5685G	112.93	Inf	-Inf	105.94	3	Vertical	335	2.90	-	34.54	7.33	34.88			
AV	5.5685G	101.67	Inf	-Inf	94.68	3	Vertical	335	2.90	-	34.54	7.33	34.88			
PK	5.78G	61.78	68.20	-6.42	54.99	3	Vertical	335	2.90	-	34.24	7.49	34.94			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5530MHz_TX

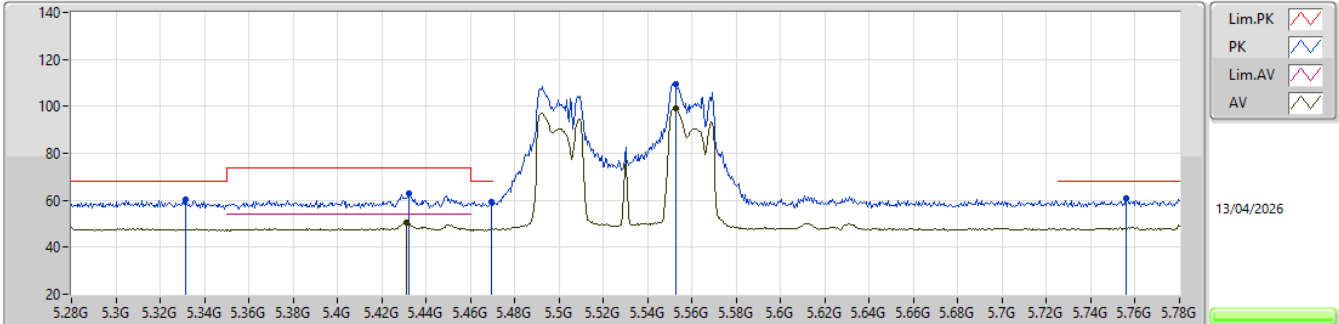EUT_Y_4TX
Setting 0.5/13
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3315G	60.48	68.20	-7.72	53.62	3	Horizontal	352	1.80	-	34.60	7.15	34.89
PK	5.432G	62.85	74.00	-11.15	55.80	3	Horizontal	352	1.80	-	34.70	7.22	34.87
AV	5.431G	50.37	54.00	-3.63	43.32	3	Horizontal	352	1.80	-	34.70	7.22	34.87
PK	5.4695G	59.14	68.20	-9.06	52.06	3	Horizontal	352	1.80	-	34.70	7.25	34.87
PK	5.5525G	109.67	Inf	-Inf	102.73	3	Horizontal	352	1.80	-	34.51	7.31	34.88
AV	5.5525G	99.19	Inf	-Inf	92.25	3	Horizontal	352	1.80	-	34.51	7.31	34.88
PK	5.756G	61.09	68.20	-7.11	54.27	3	Horizontal	352	1.80	-	34.29	7.47	34.94

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5530MHz_TX

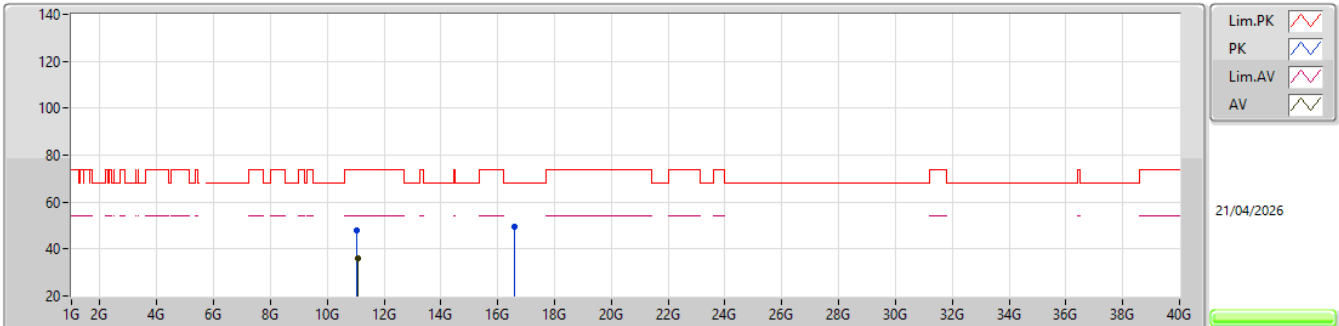


EUT_Y_4TX
Setting 0.5/13
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05355G	47.68	74.00	-26.32	42.38	3	Vertical	108	2.07	-	39.19	12.31	46.20			
AV	11.06699G	36.03	54.00	-17.97	30.73	3	Vertical	108	2.07	-	39.17	12.32	46.19			
PK	16.59438G	49.32	68.20	-18.88	39.29	3	Vertical	311	1.62	-	39.70	14.95	44.62			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5530MHz_TX

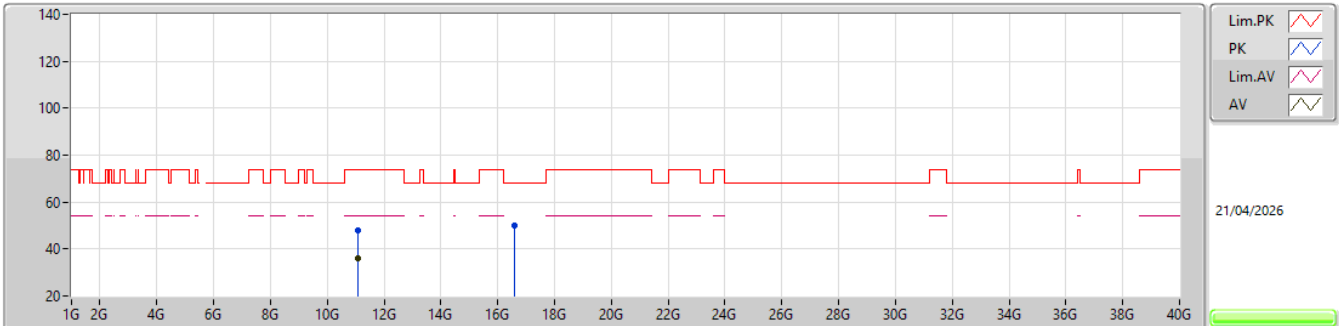


EUT_Y_4TX
Setting 0.5/13
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.07167G	47.79	74.00	-26.21	42.50	3	Horizontal	309	2.07	-	39.16	12.32	46.19			
AV	11.06648G	35.97	54.00	-18.03	30.67	3	Horizontal	309	2.07	-	39.17	12.32	46.19			
PK	16.59672G	49.78	68.20	-18.42	39.75	3	Horizontal	210	1.58	-	39.70	14.95	44.62			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5610MHz_TX

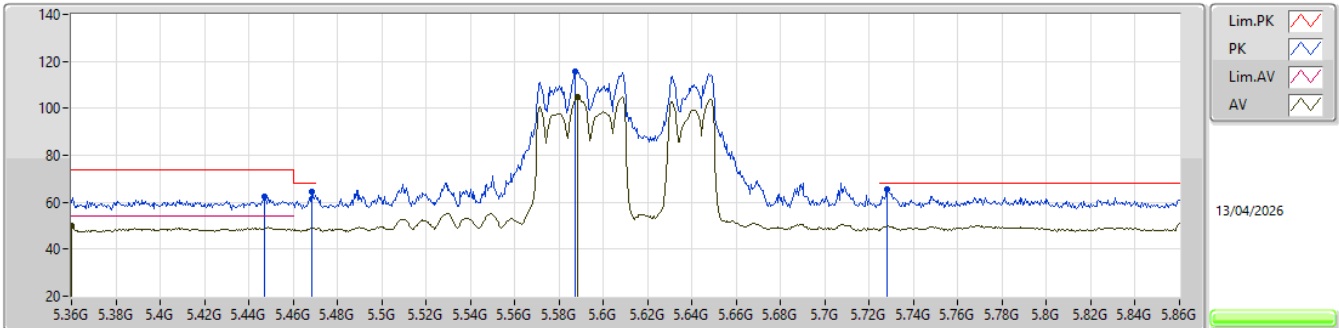


EUT_Y_4TX
Setting -4/17.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.447G	62.46	74.00	-11.54	55.39	3	Vertical	335	2.87	-	34.70	7.24	34.87
AV	5.36G	49.97	54.00	-4.03	43.07	3	Vertical	335	2.87	-	34.62	7.17	34.89
PK	5.4685G	64.66	68.20	-3.54	57.58	3	Vertical	335	2.87	-	34.70	7.25	34.87
PK	5.587G	115.64	Inf	-Inf	108.62	3	Vertical	335	2.87	-	34.57	7.34	34.89
AV	5.5885G	104.70	Inf	-Inf	97.67	3	Vertical	335	2.87	-	34.58	7.34	34.89
PK	5.728G	65.56	68.20	-2.64	58.74	3	Vertical	335	2.87	-	34.30	7.45	34.93

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5610MHz_TX

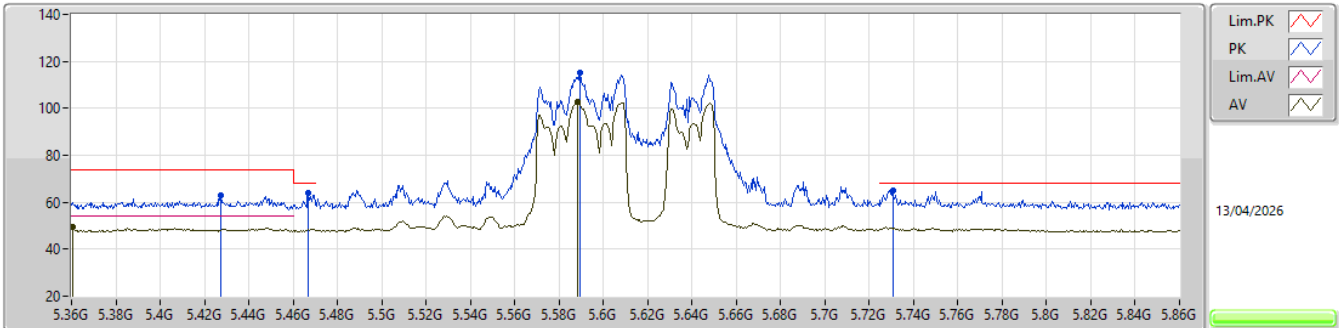EUT_Y_4TX
Setting -4/17.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4275G	62.75	74.00	-11.25	55.70	3	Horizontal	345	2.08	-	34.70	7.22	34.87
AV	5.3605G	49.39	54.00	-4.61	42.49	3	Horizontal	345	2.08	-	34.62	7.17	34.89
PK	5.467G	63.78	68.20	-4.42	56.70	3	Horizontal	345	2.08	-	34.70	7.25	34.87
PK	5.5895G	114.97	Inf	-Inf	107.94	3	Horizontal	345	2.08	-	34.58	7.34	34.89
AV	5.5885G	102.95	Inf	-Inf	95.92	3	Horizontal	345	2.08	-	34.58	7.34	34.89
PK	5.7305G	65.16	68.20	-3.04	58.34	3	Horizontal	345	2.08	-	34.30	7.45	34.93

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5610MHz_TX

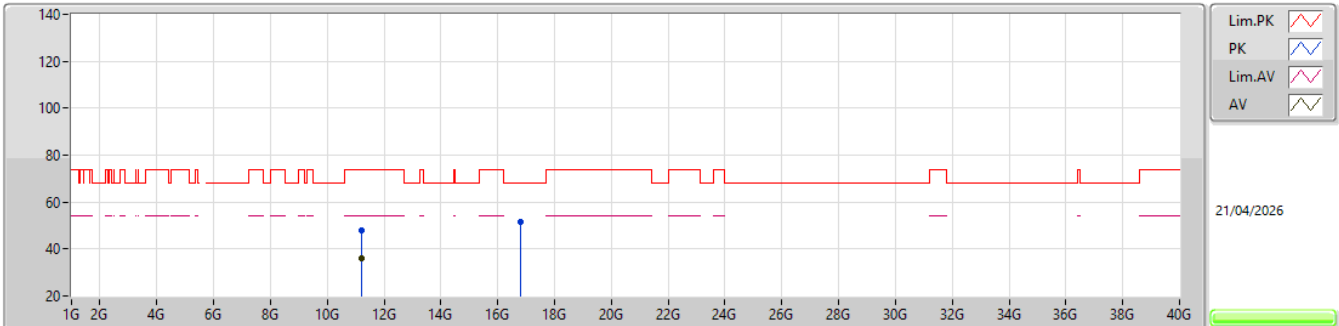EUT_Y_4TX
Setting -4/17.5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.20815G	47.86	74.00	-26.14	42.61	3	Vertical	315	1.75	-	38.92	12.39	46.06			
AV	11.21883G	35.89	54.00	-18.11	30.60	3	Vertical	315	1.75	-	38.94	12.40	46.05			
PK	16.82289G	51.77	68.20	-16.43	41.16	3	Vertical	42	1.72	-	40.39	15.00	44.78			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5610MHz_TX

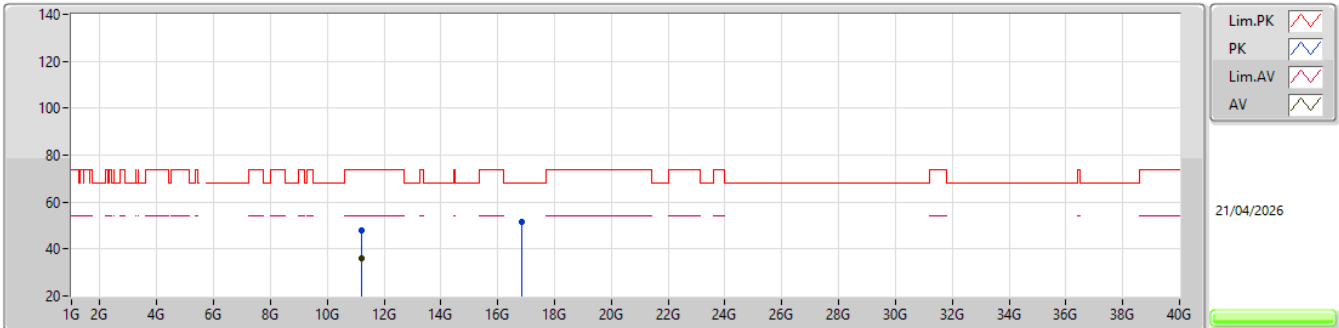


EUT_Y_4TX
Setting -4/17.5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.20845G	48.05	74.00	-25.95	42.80	3	Horizontal	42	1.82	-	38.92	12.39	46.06			
AV	11.21787G	35.88	54.00	-18.12	30.59	3	Horizontal	42	1.82	-	38.94	12.40	46.05			
PK	16.84263G	51.79	68.20	-16.41	41.12	3	Horizontal	336	1.33	-	40.47	15.00	44.80			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5610MHz_TX

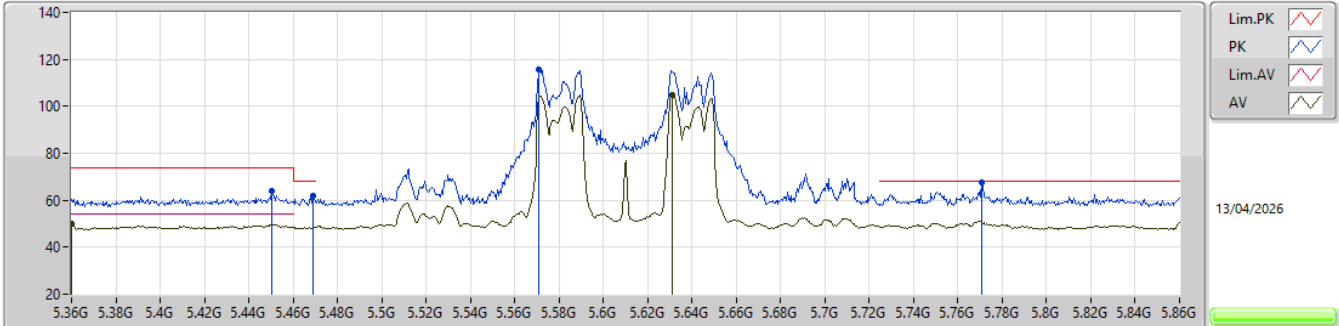


EUT_Y_4TX
Setting -4.5/18
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4505G	63.97	74.00	-10.03	56.90	3	Vertical	313	2.75	-	34.70	7.24	34.87
AV	5.36G	50.08	54.00	-3.92	43.18	3	Vertical	313	2.75	-	34.62	7.17	34.89
PK	5.469G	62.11	68.20	-6.09	55.03	3	Vertical	313	2.75	-	34.70	7.25	34.87
PK	5.571G	115.49	Inf	-Inf	108.50	3	Vertical	313	2.75	-	34.54	7.33	34.88
AV	5.631G	104.91	Inf	-Inf	97.90	3	Vertical	313	2.75	-	34.54	7.37	34.90
PK	5.7705G	67.50	68.20	-0.70	60.69	3	Vertical	313	2.75	-	34.26	7.49	34.94

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5610MHz_TX

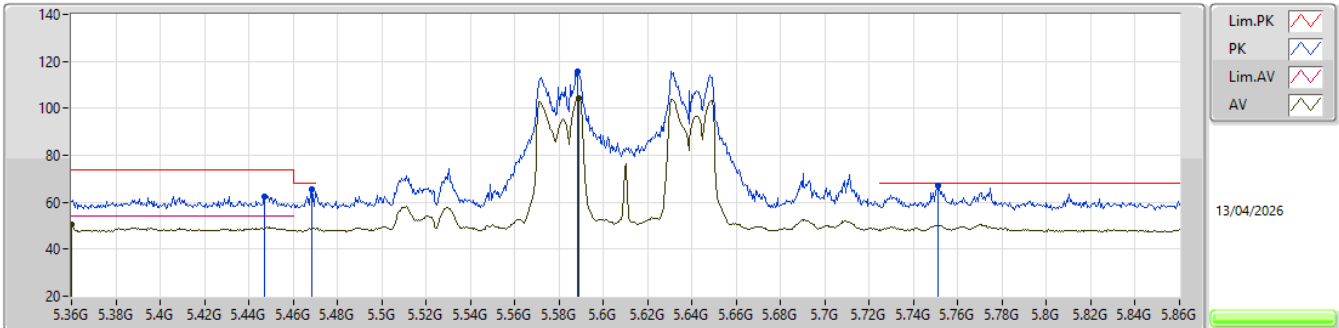EUT_Y_4TX
Setting -4.5/18
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.447G	62.67	74.00	-11.33	55.60	3	Horizontal	348	2.02	-	34.70	7.24	34.87
AV	5.36G	50.33	54.00	-3.67	43.43	3	Horizontal	348	2.02	-	34.62	7.17	34.89
PK	5.4685G	65.47	68.20	-2.73	58.39	3	Horizontal	348	2.02	-	34.70	7.25	34.87
PK	5.5885G	115.88	Inf	-Inf	108.85	3	Horizontal	348	2.02	-	34.58	7.34	34.89
AV	5.589G	104.56	Inf	-Inf	97.53	3	Horizontal	348	2.02	-	34.58	7.34	34.89
PK	5.751G	67.16	68.20	-1.04	60.33	3	Horizontal	348	2.02	-	34.30	7.47	34.94

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5610MHz_TX

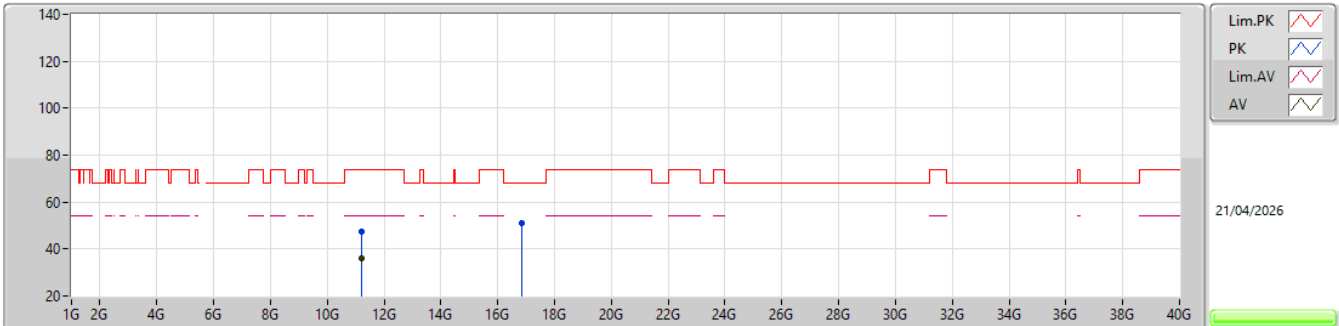EUT_Y_4TX
Setting -4.5/18
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22966G	47.23	74.00	-26.77	41.91	3	Vertical	229	1.54	-	38.96	12.40	46.04			
AV	11.22669G	35.98	54.00	-18.02	30.68	3	Vertical	229	1.54	-	38.95	12.40	46.05			
PK	16.83402G	51.20	68.20	-17.00	40.55	3	Vertical	31	1.95	-	40.44	15.00	44.79			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5610MHz_TX

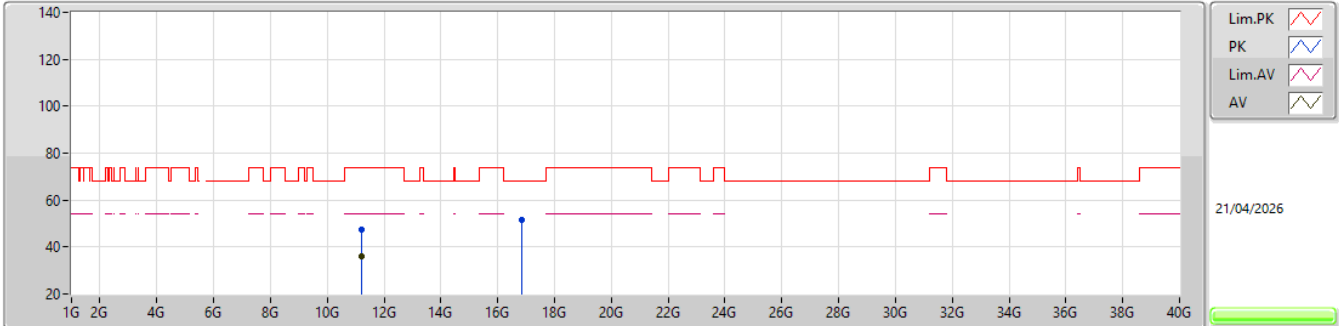


EUT_Y_4TX
Setting -4.5/18
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21832G	47.56	74.00	-26.44	42.27	3	Horizontal	95	1.31	-	38.94	12.40	46.05			
AV	11.21682G	35.93	54.00	-18.07	30.66	3	Horizontal	95	1.31	-	38.93	12.39	46.05			
PK	16.82892G	51.62	68.20	-16.58	40.99	3	Horizontal	143	2.10	-	40.42	15.00	44.79			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5690MHz Straddle 5.47-5.725GHz_TX

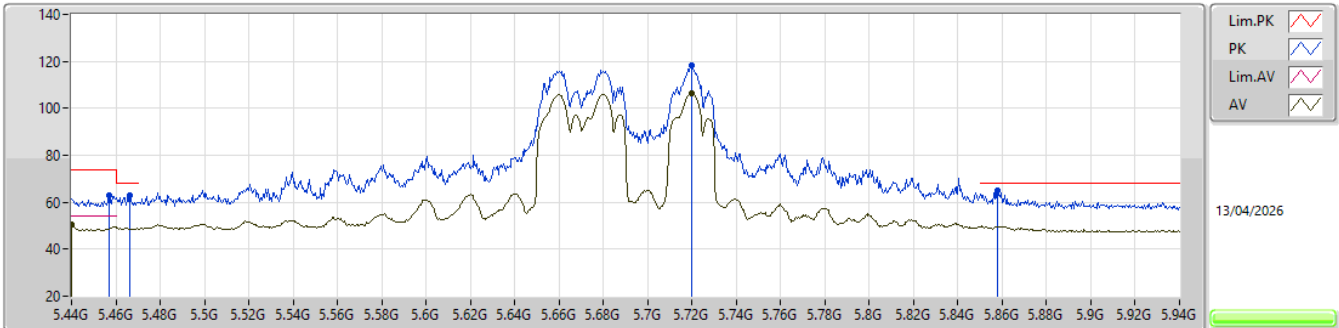


EUT_Y_4TX
Setting 6.5/20
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.457G	63.13	74.00	-10.87	56.06	3	Vertical	312	1.89	-	34.70	7.24	34.87
AV	5.44G	50.63	54.00	-3.37	43.57	3	Vertical	312	1.89	-	34.70	7.23	34.87
PK	5.4665G	62.97	68.20	-5.23	55.89	3	Vertical	312	1.89	-	34.70	7.25	34.87
PK	5.72G	118.05	Inf	-Inf	111.23	3	Vertical	312	1.89	-	34.30	7.45	34.93
AV	5.72G	106.35	Inf	-Inf	99.53	3	Vertical	312	1.89	-	34.30	7.45	34.93
PK	5.858G	65.12	68.20	-3.08	58.05	3	Vertical	312	1.89	-	34.52	7.52	34.97

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5690MHz Straddle 5.47-5.725GHz_TX

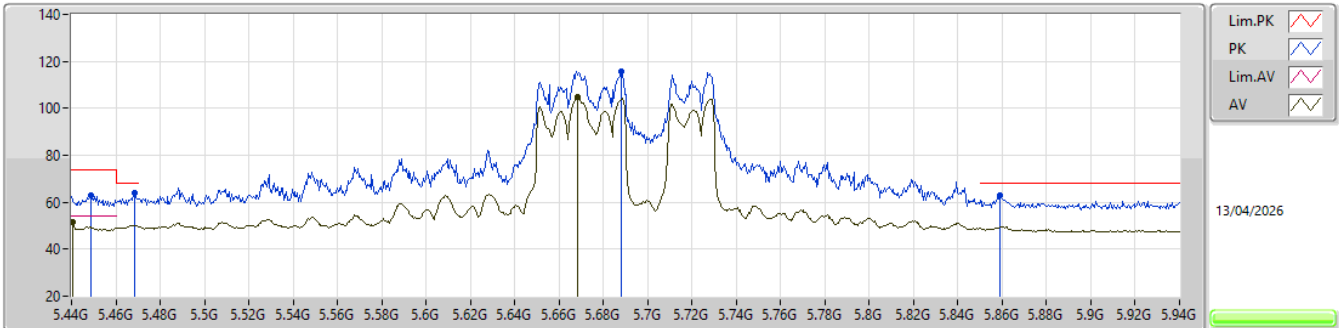


EUT_Y_4TX
Setting 6.5/20
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4485G	63.09	74.00	-10.91	56.02	3	Horizontal	346	2.11	-	34.70	7.24	34.87
AV	5.4405G	51.43	54.00	-2.57	44.37	3	Horizontal	346	2.11	-	34.70	7.23	34.87
PK	5.4685G	64.07	68.20	-4.13	56.99	3	Horizontal	346	2.11	-	34.70	7.25	34.87
PK	5.688G	115.62	Inf	-Inf	108.77	3	Horizontal	346	2.11	-	34.35	7.42	34.92
AV	5.6685G	104.97	Inf	-Inf	98.05	3	Horizontal	346	2.11	-	34.43	7.40	34.91
PK	5.859G	63.07	68.20	-5.13	56.00	3	Horizontal	346	2.11	-	34.52	7.52	34.97

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5690MHz Straddle 5.47-5.725GHz_TX

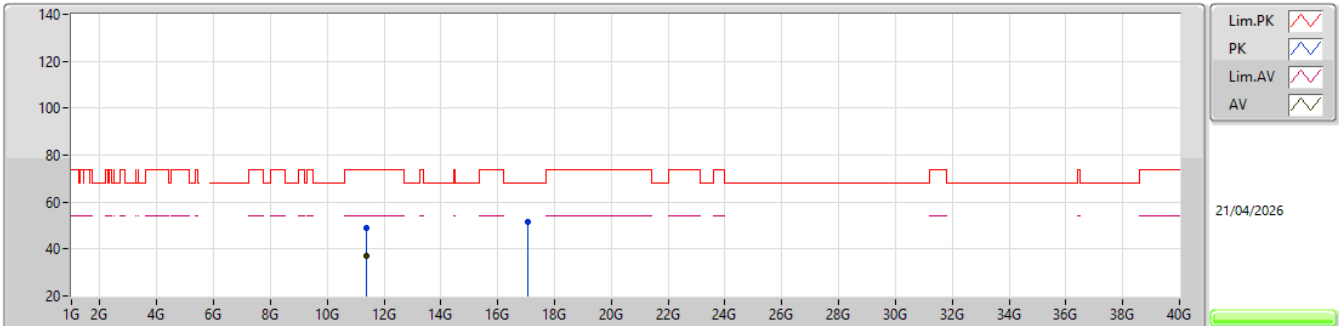EUT_Y_4TX
Setting 6.5/20
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3854G	49.19	74.00	-24.81	43.48	3	Vertical	218	1.45	-	39.13	12.48	45.90			
AV	11.37472G	37.23	54.00	-16.77	31.52	3	Vertical	218	1.45	-	39.15	12.47	45.91			
PK	17.07411G	51.43	68.20	-16.77	40.25	3	Vertical	316	1.64	-	41.10	15.05	44.97			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5690MHz Straddle 5.47-5.725GHz_TX

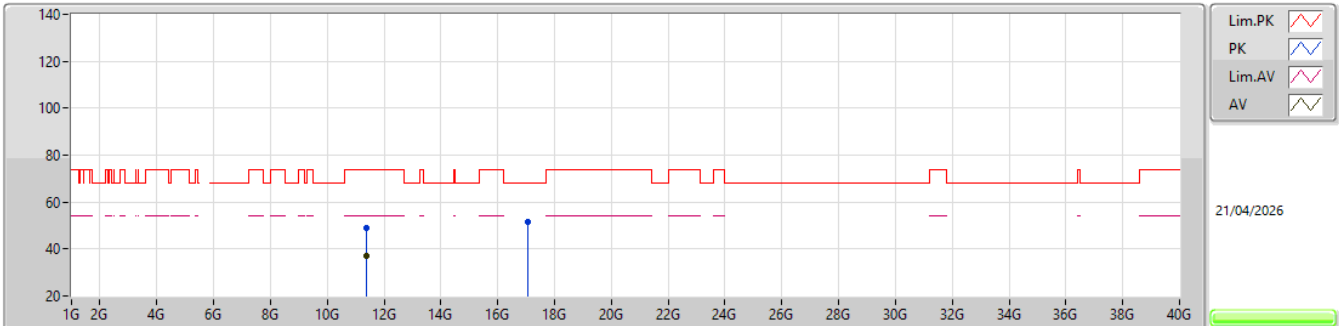EUT_Y_4TX
Setting 6.5/20
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3887G	49.03	74.00	-24.97	43.33	3	Horizontal	103	2.03	-	39.12	12.48	45.90			
AV	11.38009G	37.19	54.00	-16.81	31.48	3	Horizontal	103	2.03	-	39.14	12.48	45.91			
PK	17.07633G	51.46	68.20	-16.74	40.27	3	Horizontal	204	2.09	-	41.11	15.05	44.97			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5690MHz Straddle 5.47-5.725GHz_TX

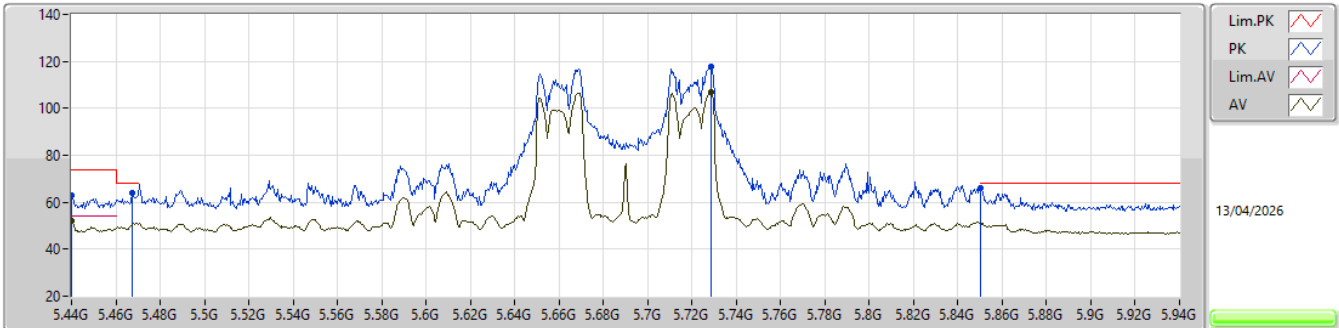


EUT_Y_4TX
Setting -5.5/19
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.44G	62.76	74.00	-11.24	55.70	3	Vertical	338	2.52	-	34.70	7.23	34.87
AV	5.44G	51.91	54.00	-2.09	44.85	3	Vertical	338	2.52	-	34.70	7.23	34.87
PK	5.4675G	64.02	68.20	-4.18	56.94	3	Vertical	338	2.52	-	34.70	7.25	34.87
PK	5.7285G	117.89	Inf	-Inf	111.07	3	Vertical	338	2.52	-	34.30	7.45	34.93
AV	5.7285G	106.95	Inf	-Inf	100.13	3	Vertical	338	2.52	-	34.30	7.45	34.93
PK	5.85G	66.12	68.20	-2.08	59.07	3	Vertical	338	2.52	-	34.50	7.51	34.96

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5690MHz Straddle 5.47-5.725GHz_TX

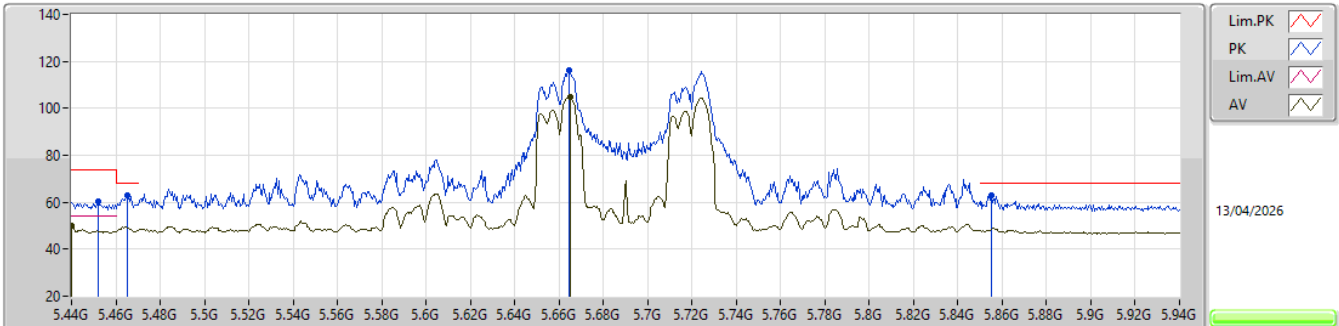


EUT_Y_4TX
Setting -5.5/19
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.452G	60.58	74.00	-13.42	53.51	3	Horizontal	309	2.04	-	34.70	7.24	34.87			
AV	5.44G	50.10	54.00	-3.90	43.04	3	Horizontal	309	2.04	-	34.70	7.23	34.87			
PK	5.465G	63.04	68.20	-5.16	55.96	3	Horizontal	309	2.04	-	34.70	7.25	34.87			
PK	5.6645G	116.22	Inf	-Inf	109.29	3	Horizontal	309	2.04	-	34.44	7.40	34.91			
AV	5.665G	104.76	Inf	-Inf	97.83	3	Horizontal	309	2.04	-	34.44	7.40	34.91			
PK	5.855G	63.01	68.20	-5.19	55.95	3	Horizontal	309	2.04	-	34.51	7.52	34.97			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5690MHz Straddle 5.47-5.725GHz_TX

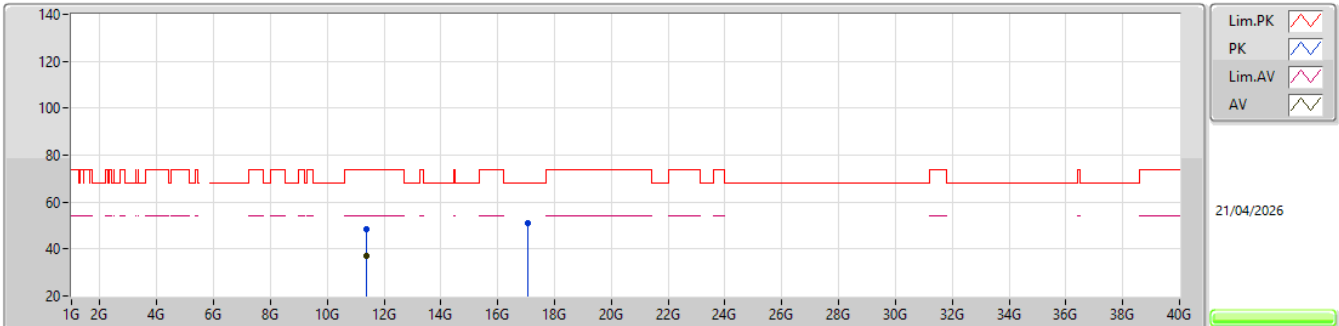


EUT_Y_4TX
Setting -5.5/19
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37013G	48.44	74.00	-25.56	42.73	3	Vertical	347	1.50	-	39.16	12.47	45.92			
AV	11.37811G	37.31	54.00	-16.69	31.60	3	Vertical	347	1.50	-	39.14	12.48	45.91			
PK	17.07273G	51.28	68.20	-16.92	40.11	3	Vertical	256	1.96	-	41.09	15.05	44.97			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5690MHz Straddle 5.47-5.725GHz_TX

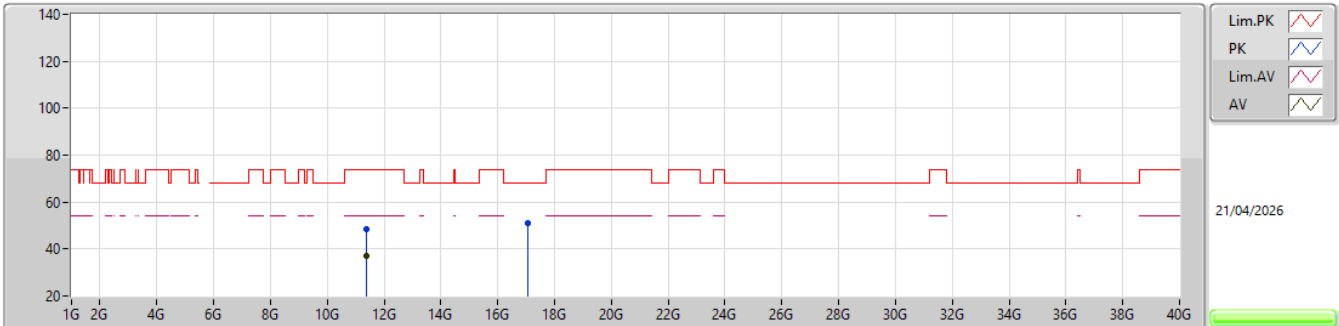EUT_Y_4TX
Setting -5.5/19
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.38948G	48.64	74.00	-25.36	42.94	3	Horizontal	76	1.42	-	39.12	12.48	45.90			
AV	11.3773G	37.12	54.00	-16.88	31.40	3	Horizontal	76	1.42	-	39.15	12.48	45.91			
PK	17.07396G	51.27	68.20	-16.93	40.09	3	Horizontal	212	1.35	-	41.10	15.05	44.97			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

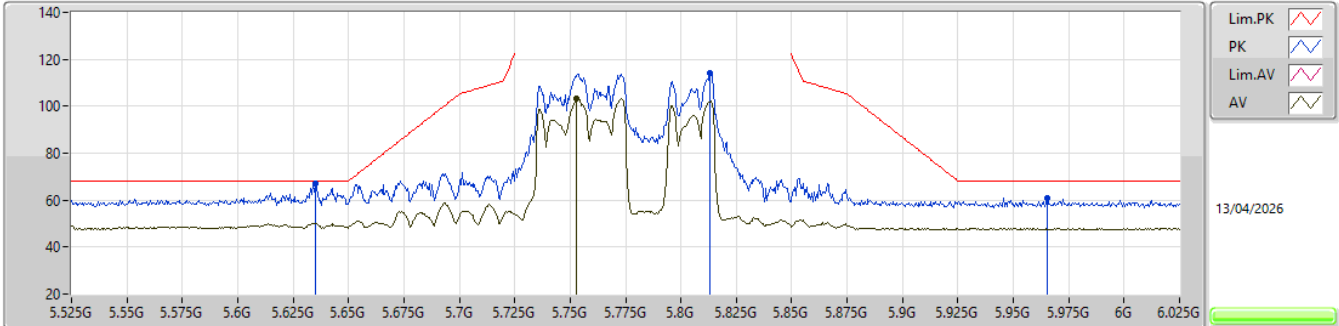


EUT_Y_4TX
Setting 5/15.5
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.635G	67.27	68.20	-0.93	60.26	3	Vertical	335	2.61	-	34.53	7.38	34.90					
PK	5.813G	114.09	Inf	-Inf	107.25	3	Vertical	335	2.61	-	34.28	7.51	34.95					
AV	5.753G	103.20	Inf	-Inf	96.38	3	Vertical	335	2.61	-	34.29	7.47	34.94					
PK	5.9655G	60.77	68.20	-7.43	53.51	3	Vertical	335	2.61	-	34.73	7.53	35.00					

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

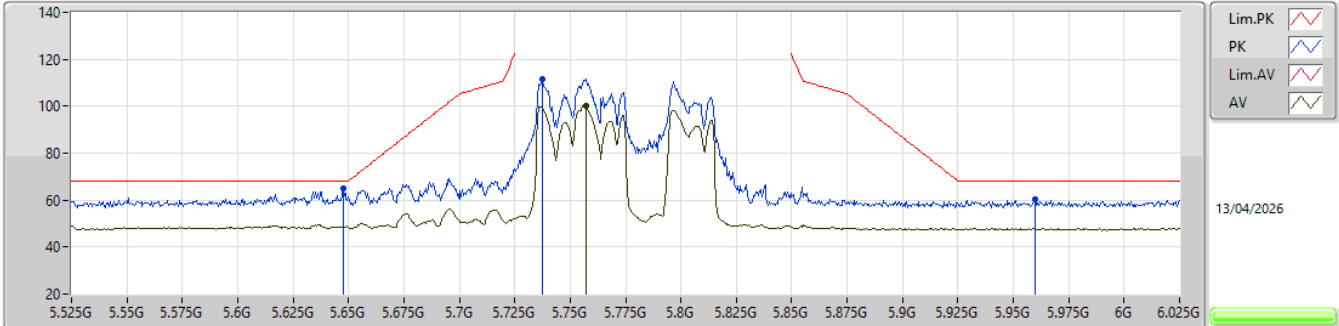


EUT_Y_4TX
Setting 5/15.5
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6475G	64.82	68.20	-3.38	57.82	3	Horizontal	350	1.87	-	34.51	7.39	34.90			
PK	5.7375G	111.67	Inf	-Inf	104.84	3	Horizontal	350	1.87	-	34.30	7.46	34.93			
AV	5.757G	100.28	Inf	-Inf	93.45	3	Horizontal	350	1.87	-	34.29	7.48	34.94			
PK	5.96G	60.25	68.20	-7.95	53.00	3	Horizontal	350	1.87	-	34.72	7.53	35.00			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

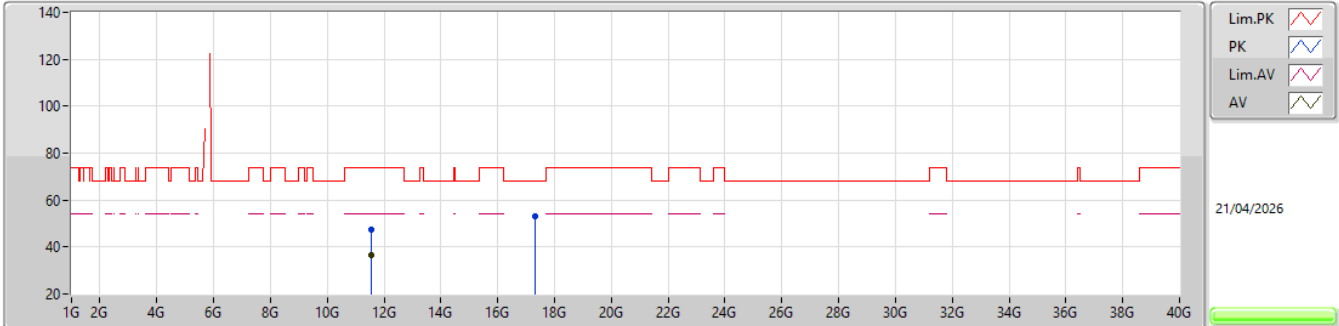


EUT_Y_4TX
Setting 5/15.5
02-R-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.5491G	47.63	74.00	-26.37	41.79	3	Vertical	308	2.06	-	39.10	12.56	45.82			
AV	11.55468G	36.44	54.00	-17.56	30.59	3	Vertical	308	2.06	-	39.10	12.57	45.82			
PK	17.31309G	52.93	68.20	-15.27	41.09	3	Vertical	249	1.69	-	41.90	15.10	45.16			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5775MHz_TX

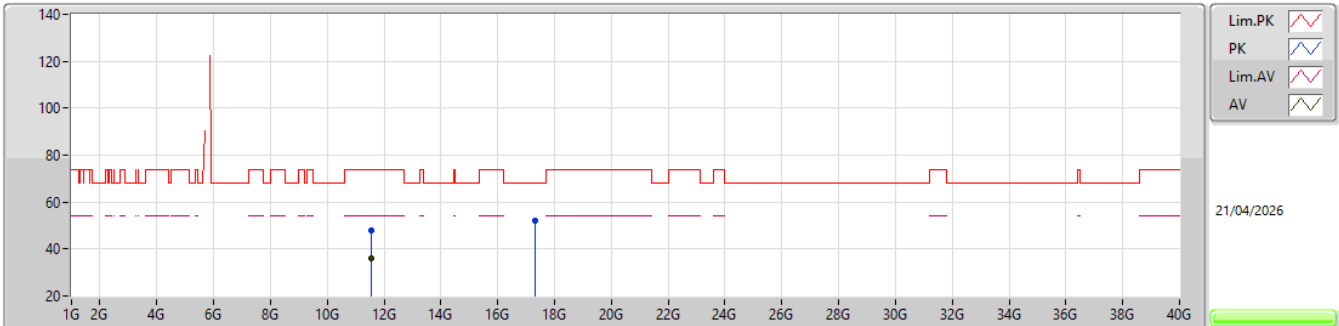EUT_Y_4TX
Setting 5/15.5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.53695G	48.13	74.00	-25.87	42.28	3	Horizontal	282	2.02	-	39.10	12.56	45.81			
AV	11.55531G	36.24	54.00	-17.76	30.39	3	Horizontal	282	2.02	-	39.10	12.57	45.82			
PK	17.31672G	52.27	68.20	-15.93	40.43	3	Horizontal	179	1.39	-	41.90	15.10	45.16			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5775MHz_TX

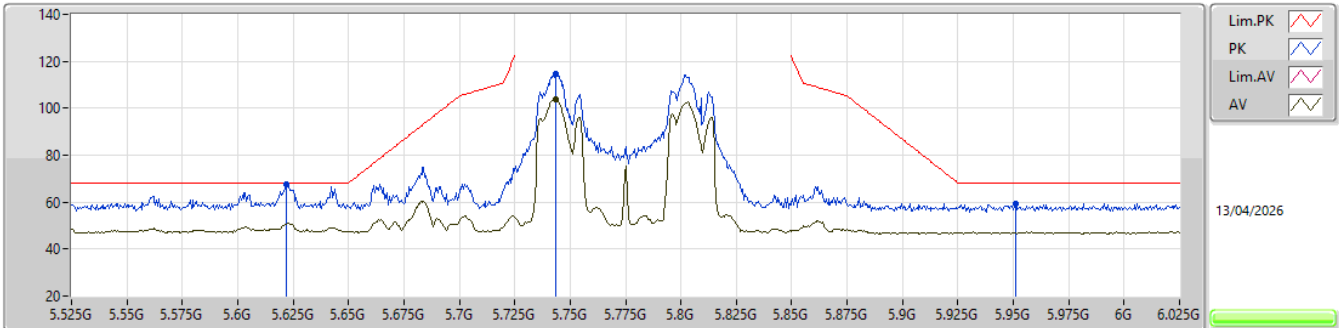


EUT_Y_4TX
Setting 3.5/17
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.622G	67.84	68.20	-0.36	60.81	3	Vertical	310	1.88	-	34.56	7.37	34.90				
PK	5.7435G	114.50	Inf	-Inf	107.67	3	Vertical	310	1.88	-	34.30	7.46	34.93				
AV	5.7435G	103.79	Inf	-Inf	96.96	3	Vertical	310	1.88	-	34.30	7.46	34.93				
PK	5.951G	59.36	68.20	-8.84	52.13	3	Vertical	310	1.88	-	34.70	7.53	35.00				

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5775MHz_TX

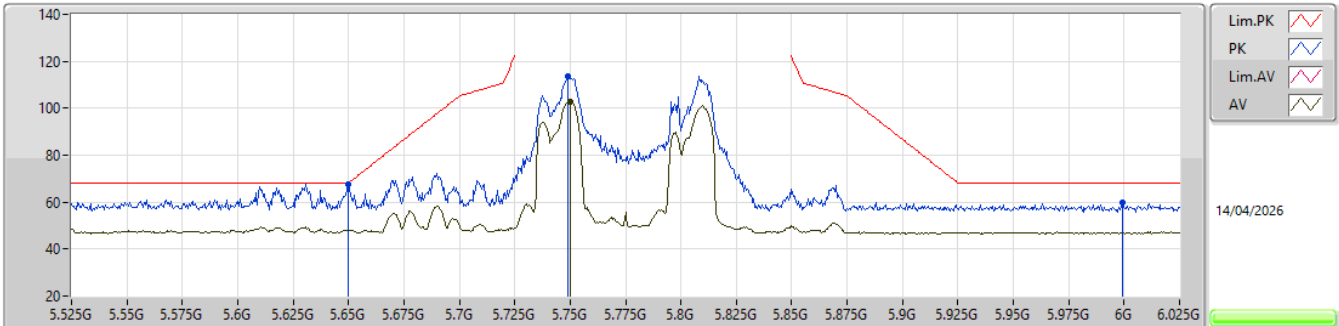


EUT_Y_4TX
Setting 3.5/17
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.65G	67.62	68.20	-0.58	60.64	3	Horizontal	0	1.98	-	34.50	7.39	34.91			
PK	5.749G	113.86	Inf	-Inf	107.02	3	Horizontal	0	1.98	-	34.30	7.47	34.93			
AV	5.75G	102.91	Inf	-Inf	96.08	3	Horizontal	0	1.98	-	34.30	7.47	34.94			
PK	5.999G	60.07	68.20	-8.13	52.75	3	Horizontal	0	1.98	-	34.80	7.53	35.01			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5775MHz_TX

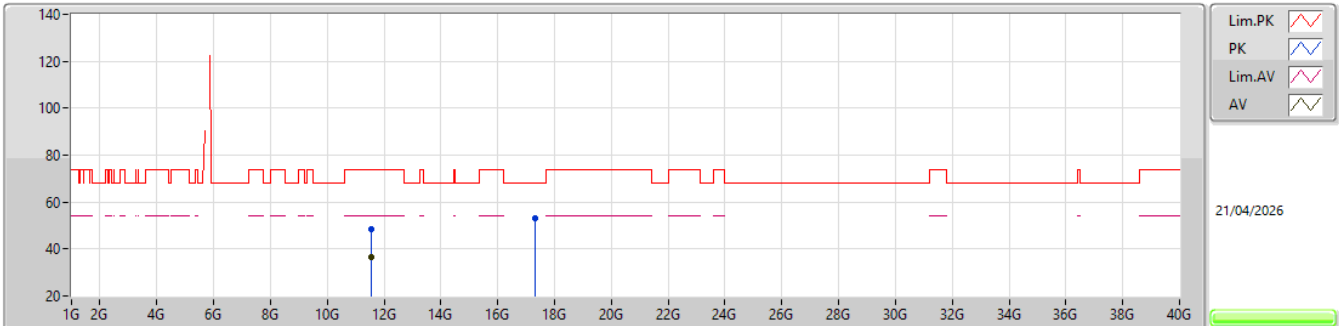EUT_Y_4TX
Setting 3.5/17
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5524G	48.22	74.00	-25.78	42.38	3	Vertical	213	2.08	-	39.10	12.56	45.82			
AV	11.54877G	36.38	54.00	-17.62	30.54	3	Vertical	213	2.08	-	39.10	12.56	45.82			
PK	17.33013G	52.88	68.20	-15.32	41.05	3	Vertical	72	2.05	-	41.90	15.10	45.17			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX


5775MHz_TX

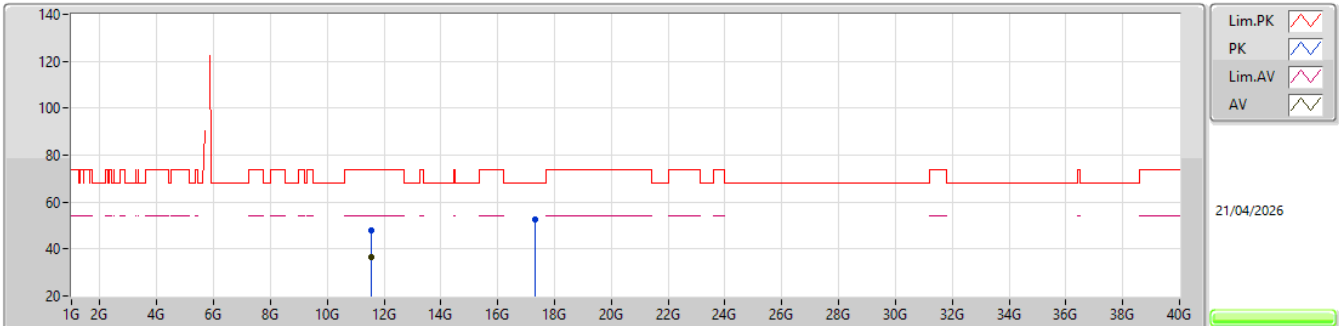EUT_Y_4TX
Setting 3.5/17
02-R-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.56446G	47.69	74.00	-26.31	41.84	3	Horizontal	285	1.44	-	39.10	12.57	45.82			
AV	11.56212G	36.34	54.00	-17.66	30.49	3	Horizontal	285	1.44	-	39.10	12.57	45.82			
PK	17.32242G	52.41	68.20	-15.79	40.58	3	Horizontal	315	1.37	-	41.90	15.10	45.17			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU966+RU484 MRU 2_4TX

5250MHz Straddle 5.25-5.35GHz_TX

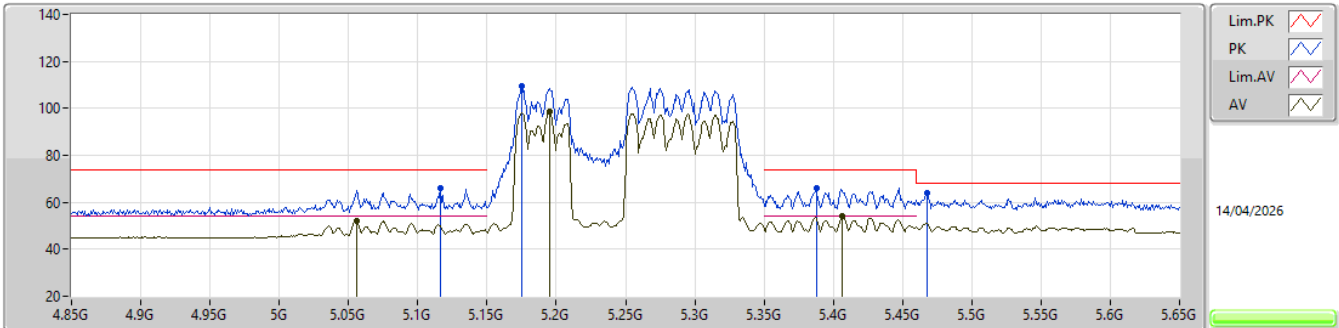


EUT_Y_4TX
Setting -1.5/16
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1164G	65.83	74.00	-8.17	59.69	3	Vertical	353	2.96	-	34.10	6.98	34.94			
AV	5.0556G	52.03	54.00	-1.97	46.23	3	Vertical	353	2.96	-	33.83	6.92	34.95			
PK	5.1748G	109.51	Inf	-Inf	103.30	3	Vertical	353	2.96	-	34.10	7.04	34.93			
AV	5.1948G	98.41	Inf	-Inf	92.17	3	Vertical	353	2.96	-	34.10	7.06	34.92			
PK	5.3876G	66.09	74.00	-7.91	59.10	3	Vertical	353	2.96	-	34.68	7.19	34.88			
AV	5.406G	53.97	54.00	-0.03	46.95	3	Vertical	353	2.96	-	34.70	7.20	34.88			
PK	5.4676G	63.83	68.20	-4.37	56.75	3	Vertical	353	2.96	-	34.70	7.25	34.87			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU966+RU484 MRU 2_4TX

5250MHz Straddle 5.25-5.35GHz_TX

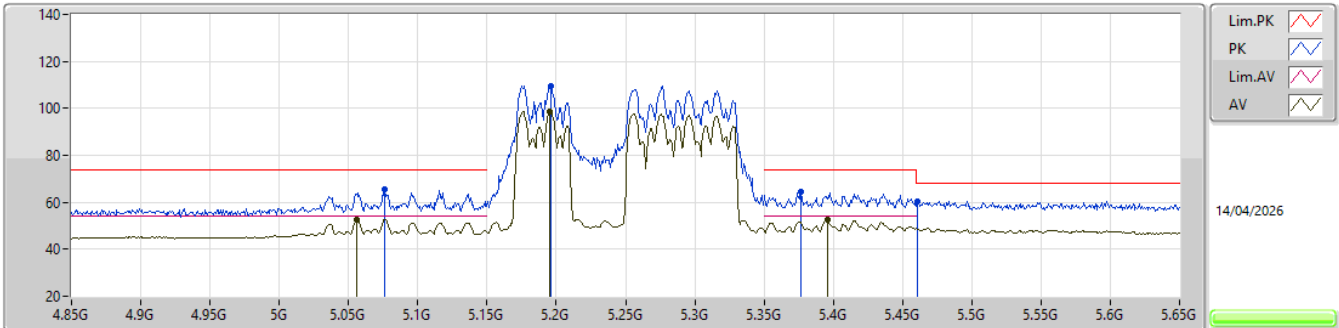


EUT_Y_4TX
Setting -1.5/16
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.0764G	65.36	74.00	-8.64	59.40	3	Horizontal	342	1.78	-	33.96	6.94	34.94					
AV	5.0556G	52.59	54.00	-1.41	46.79	3	Horizontal	342	1.78	-	33.83	6.92	34.95					
PK	5.1964G	109.67	Inf	-Inf	103.43	3	Horizontal	342	1.78	-	34.10	7.06	34.92					
AV	5.1956G	98.61	Inf	-Inf	92.37	3	Horizontal	342	1.78	-	34.10	7.06	34.92					
PK	5.3764G	64.48	74.00	-9.52	57.53	3	Horizontal	342	1.78	-	34.65	7.18	34.88					
AV	5.3956G	52.41	54.00	-1.59	45.40	3	Horizontal	342	1.78	-	34.69	7.20	34.88					
PK	5.4604G	60.56	68.20	-7.64	53.48	3	Horizontal	342	1.78	-	34.70	7.25	34.87					

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU966+RU484 MRU 2_4TX


5250MHz Straddle 5.25-5.35GHz_TX

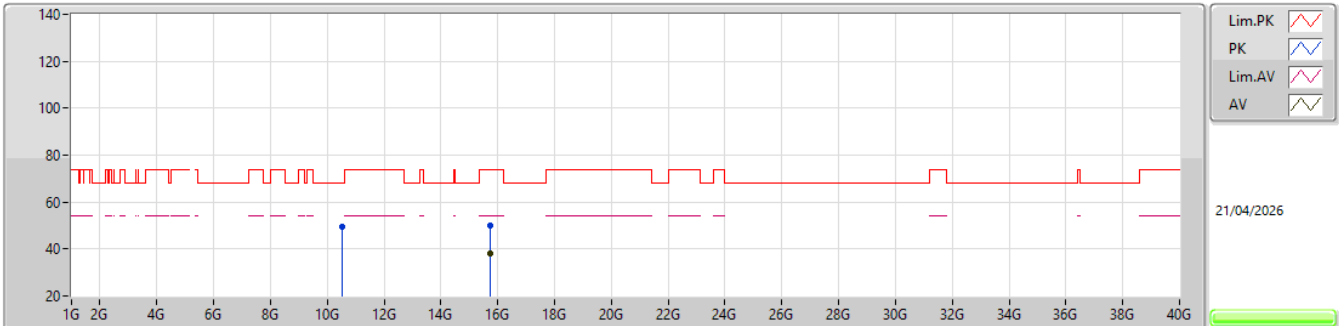EUT_Y_4TX
Setting -1.5/16
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51062G	49.45	68.20	-18.75	43.62	3	Vertical	2	1.59	-	39.12	12.04	45.33			
PK	15.75258G	50.24	74.00	-23.76	40.62	3	Vertical	231	1.50	-	38.40	14.62	43.40			
AV	15.74256G	38.23	54.00	-15.77	28.60	3	Vertical	231	1.50	-	38.39	14.61	43.37			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU966+RU484 MRU 2_4TX


5250MHz Straddle 5.25-5.35GHz_TX

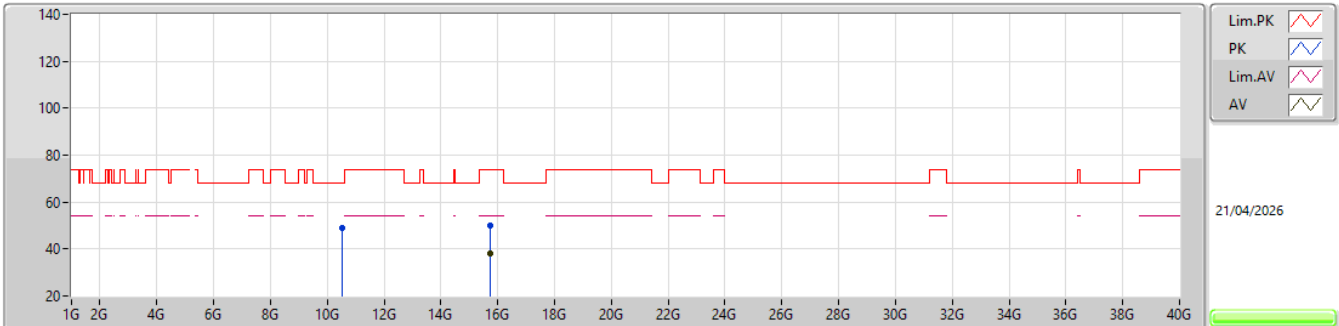EUT_Y_4TX
Setting -1.5/16
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50552G	48.76	68.20	-19.44	42.93	3	Horizontal	293	2.02	-	39.11	12.04	45.32			
PK	15.74067G	50.05	74.00	-23.95	40.43	3	Horizontal	0	1.88	-	38.38	14.61	43.37			
AV	15.74181G	38.31	54.00	-15.69	28.69	3	Horizontal	0	1.88	-	38.38	14.61	43.37			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),3xRU242+RU484 MRU 1_4TX


5250MHz Straddle 5.25-5.35GHz_TX

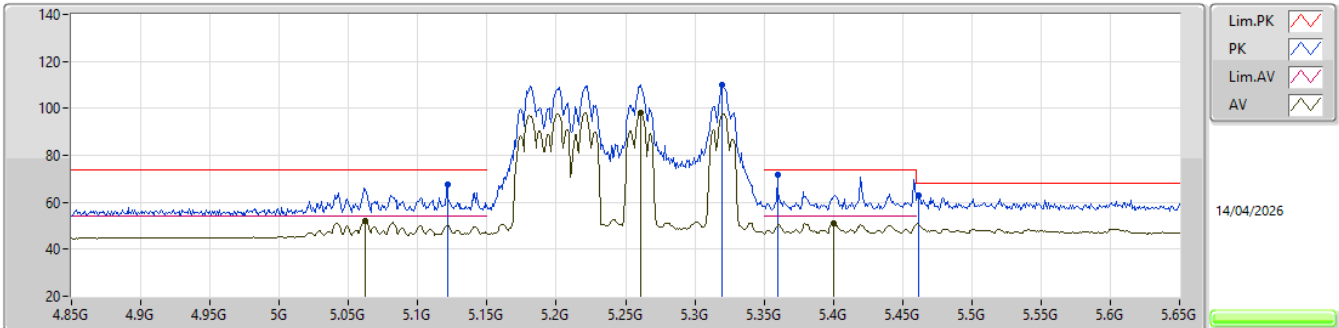EUT_Y_4TX
Setting -1.5/16
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1212G	67.74	74.00	-6.26	61.59	3	Vertical	342	2.06	-	34.10	6.99	34.94			
AV	5.062G	52.05	54.00	-1.95	46.20	3	Vertical	342	2.06	-	33.87	6.93	34.95			
PK	5.3196G	110.00	Inf	-Inf	103.16	3	Vertical	342	2.06	-	34.60	7.14	34.90			
AV	5.2612G	98.22	Inf	-Inf	91.66	3	Vertical	342	2.06	-	34.37	7.10	34.91			
PK	5.3596G	71.76	74.00	-2.24	64.86	3	Vertical	342	2.06	-	34.62	7.17	34.89			
AV	5.4004G	51.22	54.00	-2.78	44.20	3	Vertical	342	2.06	-	34.70	7.20	34.88			
PK	5.4612G	63.03	68.20	-5.17	55.95	3	Vertical	342	2.06	-	34.70	7.25	34.87			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),3xRU242+RU484 MRU 1_4TX

5250MHz Straddle 5.25-5.35GHz_TX

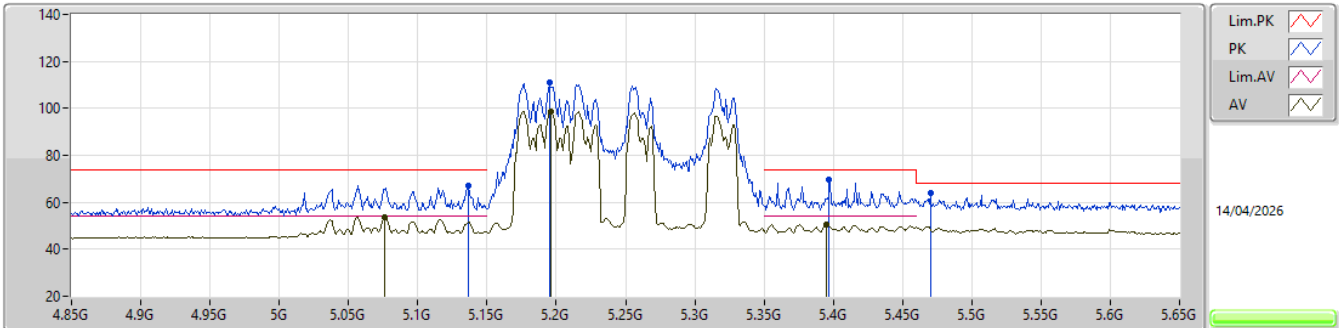


EUT_Y_4TX
Setting -1.5/16
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1364G	67.29	74.00	-6.71	61.12	3	Horizontal	343	1.76	-	34.10	7.00	34.93			
AV	5.0764G	53.79	54.00	-0.21	47.83	3	Horizontal	343	1.76	-	33.96	6.94	34.94			
PK	5.1948G	110.99	Inf	-Inf	104.75	3	Horizontal	343	1.76	-	34.10	7.06	34.92			
AV	5.1964G	98.84	Inf	-Inf	92.60	3	Horizontal	343	1.76	-	34.10	7.06	34.92			
PK	5.3972G	69.76	74.00	-4.24	62.75	3	Horizontal	343	1.76	-	34.69	7.20	34.88			
AV	5.3948G	50.76	54.00	-3.24	43.75	3	Horizontal	343	1.76	-	34.69	7.20	34.88			
PK	5.47G	64.07	68.20	-4.13	56.99	3	Horizontal	343	1.76	-	34.70	7.25	34.87			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),3xRU242+RU484 MRU 1_4TX


5250MHz Straddle 5.25-5.35GHz_TX

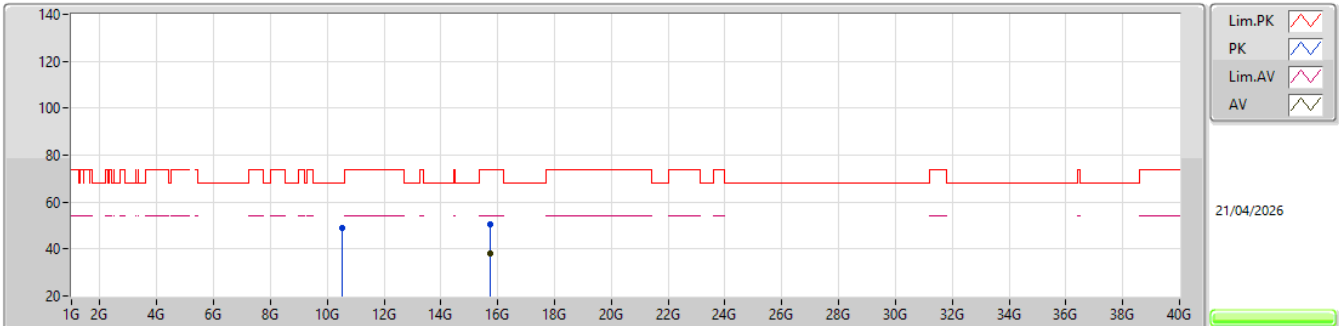EUT_Y_4TX
Setting -1.5/16
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50846G	49.20	68.20	-19.00	43.37	3	Vertical	0	1.61	-	39.12	12.04	45.33			
PK	15.74577G	50.44	74.00	-23.56	40.82	3	Vertical	270	1.82	-	38.39	14.61	43.38			
AV	15.74109G	38.31	54.00	-15.69	28.69	3	Vertical	270	1.82	-	38.38	14.61	43.37			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),3xRU242+RU484 MRU 1_4TX


5250MHz Straddle 5.25-5.35GHz_TX

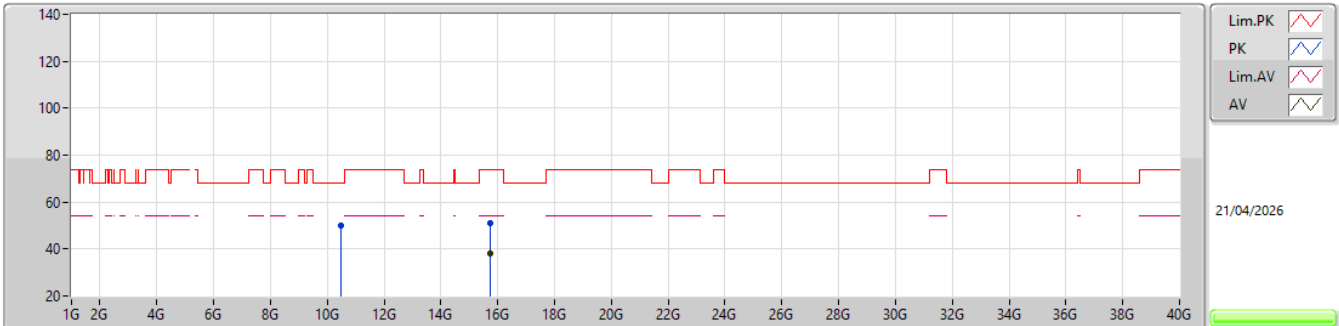EUT_Y_4TX
Setting -1.5/16
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49286G	49.88	68.20	-18.32	44.09	3	Horizontal	280	2.02	-	39.07	12.03	45.31			
PK	15.74739G	50.87	74.00	-23.13	41.25	3	Horizontal	317	1.47	-	38.39	14.61	43.38			
AV	15.73815G	38.31	54.00	-15.69	28.70	3	Horizontal	317	1.47	-	38.38	14.60	43.37			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX

5250MHz Straddle 5.25-5.35GHz_TX

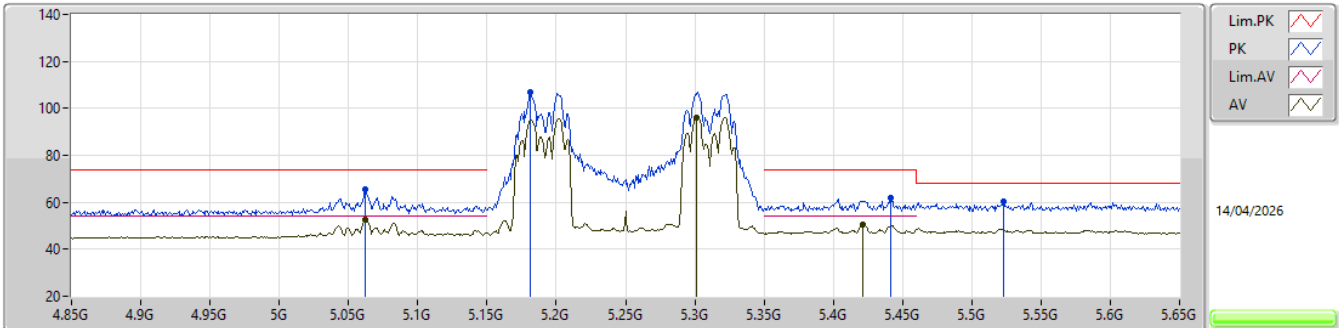


EUT Y_4TX
Setting 2/12.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.062G	65.66	74.00	-8.34	59.81	3	Vertical	345	2.00	-	33.87	6.93	34.95			
AV	5.062G	52.39	54.00	-1.61	46.54	3	Vertical	345	2.00	-	33.87	6.93	34.95			
PK	5.1812G	106.74	Inf	-Inf	100.52	3	Vertical	345	2.00	-	34.10	7.04	34.92			
AV	5.3012G	96.28	Inf	-Inf	89.45	3	Vertical	345	2.00	-	34.60	7.13	34.90			
PK	5.4412G	61.73	74.00	-12.27	54.67	3	Vertical	345	2.00	-	34.70	7.23	34.87			
AV	5.4212G	50.31	54.00	-3.69	43.27	3	Vertical	345	2.00	-	34.70	7.22	34.88			
PK	5.5228G	60.21	68.20	-7.99	53.18	3	Vertical	345	2.00	-	34.61	7.29	34.87			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX


5250MHz Straddle 5.25-5.35GHz_TX

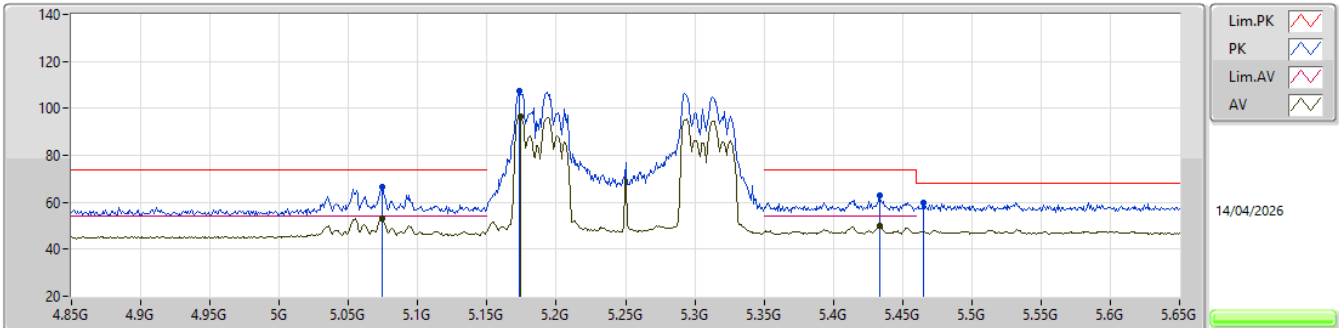EUT_Y_4TX
Setting 2/12.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.074G	66.55	74.00	-7.45	60.62	3	Horizontal	335	1.80	-	33.94	6.94	34.95			
AV	5.074G	53.28	54.00	-0.72	47.35	3	Horizontal	335	1.80	-	33.94	6.94	34.95			
PK	5.1732G	107.17	Inf	-Inf	100.97	3	Horizontal	335	1.80	-	34.10	7.03	34.93			
AV	5.174G	96.40	Inf	-Inf	90.19	3	Horizontal	335	1.80	-	34.10	7.04	34.93			
PK	5.4332G	62.80	74.00	-11.20	55.75	3	Horizontal	335	1.80	-	34.70	7.22	34.87			
AV	5.434G	50.08	54.00	-3.92	43.02	3	Horizontal	335	1.80	-	34.70	7.23	34.87			
PK	5.4652G	59.85	68.20	-8.35	52.77	3	Horizontal	335	1.80	-	34.70	7.25	34.87			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX


5250MHz Straddle 5.25-5.35GHz_TX

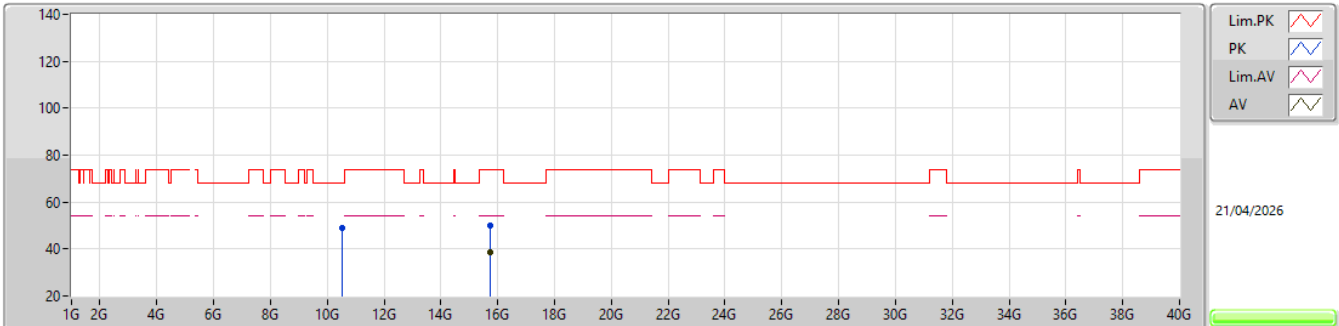EUT_Y_4TX
Setting 2/12.5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51371G	48.92	68.20	-19.28	43.09	3	Vertical	178	2.00	-	39.13	12.04	45.34			
PK	15.74193G	49.96	74.00	-24.04	40.34	3	Vertical	183	2.03	-	38.38	14.61	43.37			
AV	15.74256G	38.81	54.00	-15.19	29.18	3	Vertical	183	2.03	-	38.39	14.61	43.37			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX


5250MHz Straddle 5.25-5.35GHz_TX

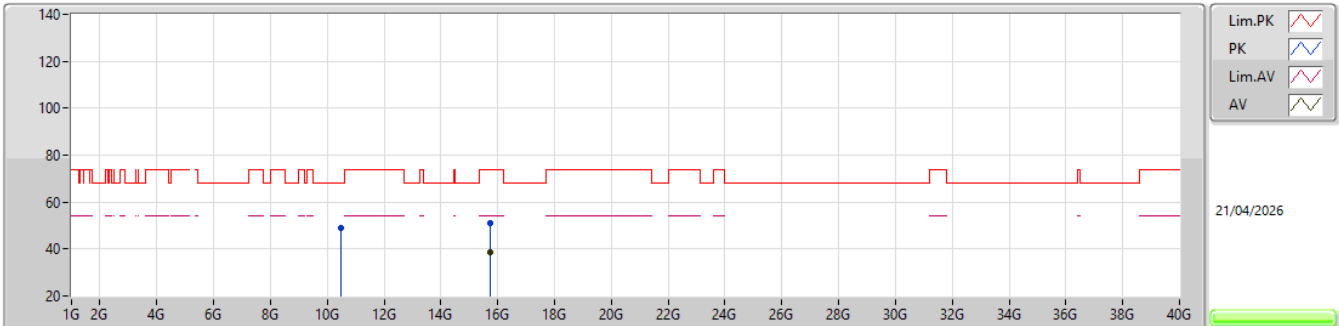EUT_Y_4TX
Setting 2/12.5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48626G	48.80	68.20	-19.40	43.03	3	Horizontal	348	1.83	-	39.05	12.03	45.31			
PK	15.73821G	51.03	74.00	-22.97	41.42	3	Horizontal	163	1.51	-	38.38	14.60	43.37			
AV	15.73815G	38.65	54.00	-15.35	29.04	3	Horizontal	163	1.51	-	38.38	14.60	43.37			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU966+RU484 MRU 2_4TX

5570MHz_TX

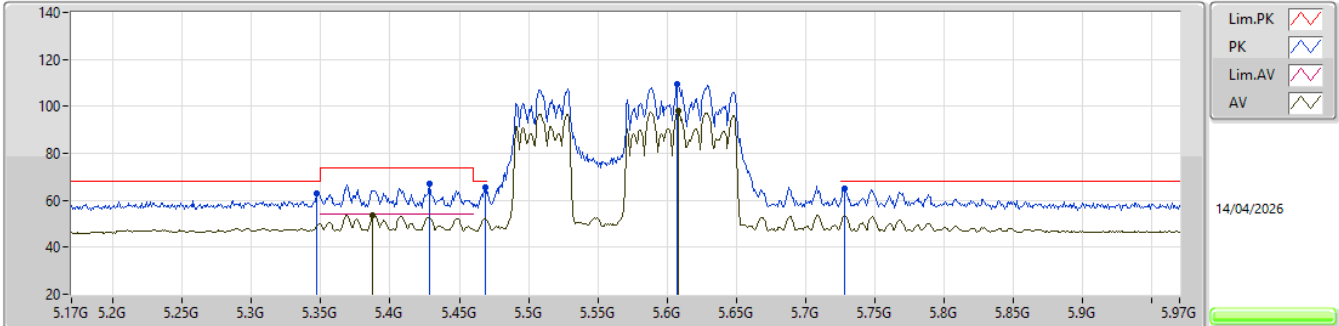


EUT_Y_4TX
Setting -2/15.5
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3468G	62.81	68.20	-5.39	55.94	3	Vertical	306	2.71	-	34.60	7.16	34.89			
AV	5.3876G	53.76	54.00	-0.24	46.77	3	Vertical	306	2.71	-	34.68	7.19	34.88			
PK	5.4284G	67.16	74.00	-6.84	60.11	3	Vertical	306	2.71	-	34.70	7.22	34.87			
PK	5.4692G	65.31	68.20	-2.89	58.23	3	Vertical	306	2.71	-	34.70	7.25	34.87			
PK	5.6076G	109.50	Inf	-Inf	102.45	3	Vertical	306	2.71	-	34.58	7.36	34.89			
AV	5.6084G	97.88	Inf	-Inf	90.83	3	Vertical	306	2.71	-	34.58	7.36	34.89			
PK	5.7284G	64.90	68.20	-3.30	58.08	3	Vertical	306	2.71	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU966+RU484 MRU 2_4TX


5570MHz_TX

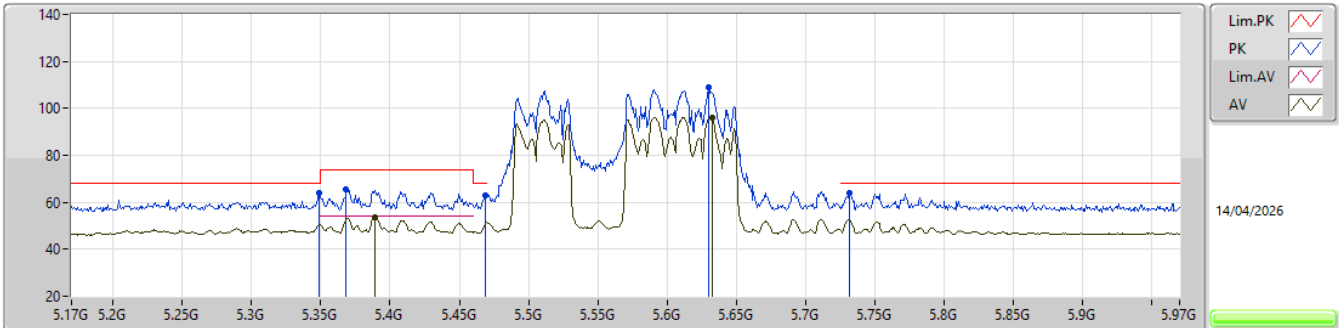EUT_Y_4TX
Setting -2/15.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3484G	64.00	68.20	-4.20	57.13	3	Horizontal	352	1.82	-	34.60	7.16	34.89			
PK	5.3684G	65.56	74.00	-8.44	58.63	3	Horizontal	352	1.82	-	34.64	7.18	34.89			
AV	5.3892G	53.55	54.00	-0.45	46.56	3	Horizontal	352	1.82	-	34.68	7.19	34.88			
PK	5.4692G	62.82	68.20	-5.38	55.74	3	Horizontal	352	1.82	-	34.70	7.25	34.87			
PK	5.63G	108.92	Inf	-Inf	101.91	3	Horizontal	352	1.82	-	34.54	7.37	34.90			
AV	5.6324G	96.29	Inf	-Inf	89.27	3	Horizontal	352	1.82	-	34.54	7.38	34.90			
PK	5.7316G	63.95	68.20	-4.25	57.12	3	Horizontal	352	1.82	-	34.30	7.46	34.93			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU966+RU484 MRU 2_4TX


5570MHz_TX

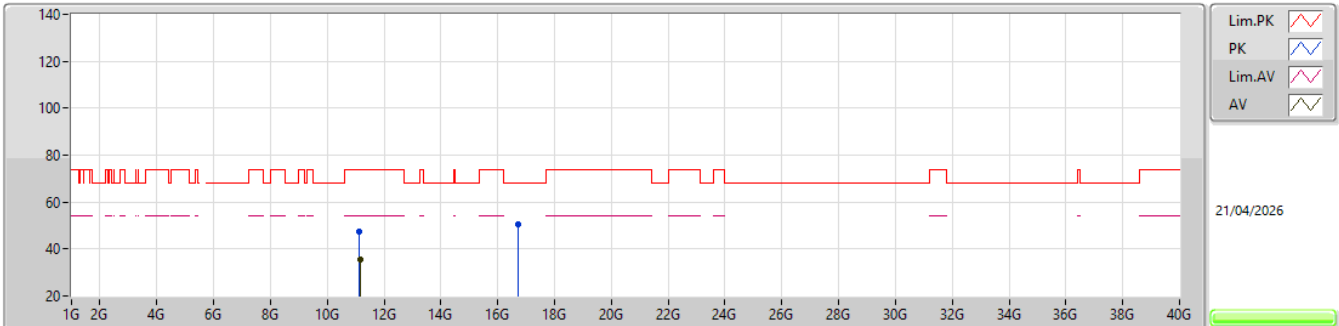EUT_Y_4TX
Setting -2/15.5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14393G	47.65	74.00	-26.35	42.49	3	Vertical	30	1.38	-	38.92	12.36	46.12			
AV	11.15134G	35.27	54.00	-18.73	30.12	3	Vertical	30	1.38	-	38.90	12.36	46.11			
PK	16.70715G	50.36	68.20	-17.84	40.16	3	Vertical	73	1.82	-	39.93	14.97	44.70			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU966+RU484 MRU 2_4TX

5570MHz_TX

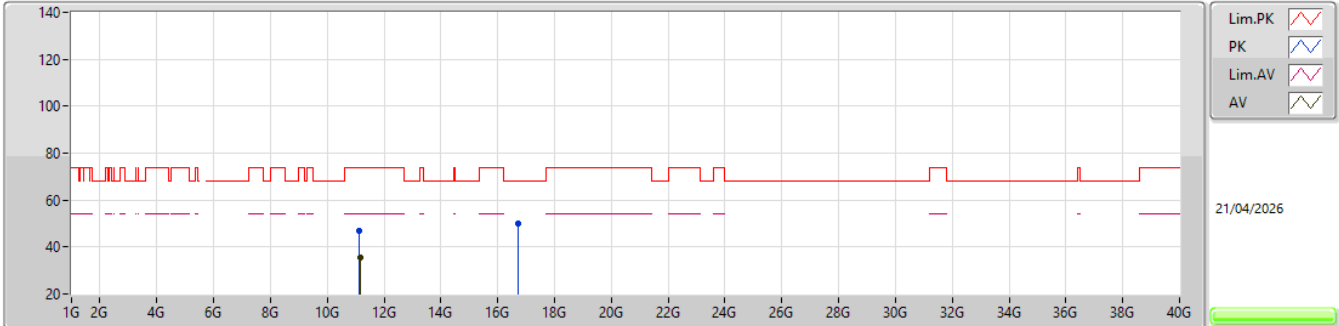


EUT_Y_4TX
Setting -2/15.5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14186G	47.13	74.00	-26.87	41.96	3	Horizontal	343	1.94	-	38.93	12.36	46.12			
AV	11.15134G	35.27	54.00	-18.73	30.12	3	Horizontal	343	1.94	-	38.90	12.36	46.11			
PK	16.71417G	50.17	68.20	-18.03	39.93	3	Horizontal	198	1.66	-	39.96	14.98	44.70			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),3xRU242+RU484 MRU 1_4TX

5570MHz_TX

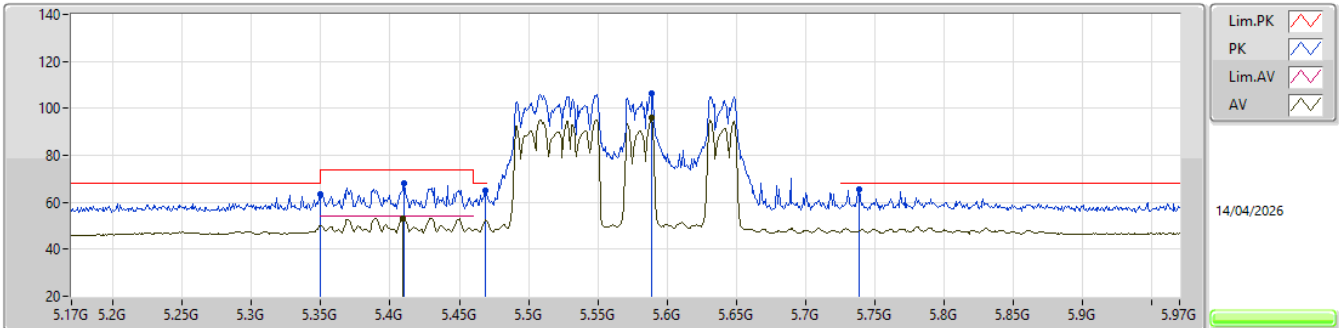


EUT_Y_4TX
Setting 1/12.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.35G	63.44	68.20	-4.76	56.57	3	Vertical	338	2.73	-	34.60	7.16	34.89			
PK	5.41G	67.90	74.00	-6.10	60.87	3	Vertical	338	2.73	-	34.70	7.21	34.88			
AV	5.4092G	53.03	54.00	-0.97	46.00	3	Vertical	338	2.73	-	34.70	7.21	34.88			
PK	5.4692G	64.98	68.20	-3.22	57.90	3	Vertical	338	2.73	-	34.70	7.25	34.87			
PK	5.5892G	106.57	Inf	-Inf	99.54	3	Vertical	338	2.73	-	34.58	7.34	34.89			
AV	5.5892G	95.96	Inf	-Inf	88.93	3	Vertical	338	2.73	-	34.58	7.34	34.89			
PK	5.7388G	65.49	68.20	-2.71	58.66	3	Vertical	338	2.73	-	34.30	7.46	34.93			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),3xRU242+RU484 MRU 1_4TX

5570MHz_TX

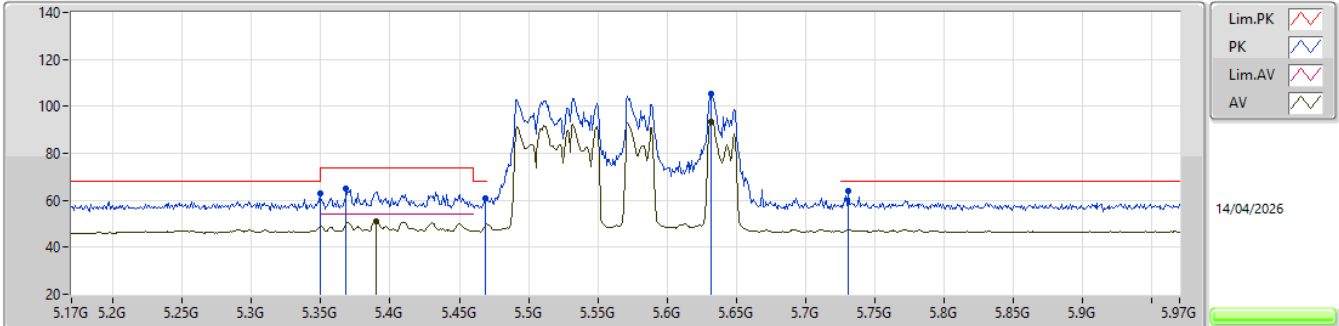


EUT_Y_4TX
Setting 1/12.5
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3492G	63.01	68.20	-5.19	56.14	3	Horizontal	352	1.79	-	34.60	7.16	34.89			
PK	5.3684G	64.76	74.00	-9.24	57.83	3	Horizontal	352	1.79	-	34.64	7.18	34.89			
AV	5.39G	51.14	54.00	-2.86	44.15	3	Horizontal	352	1.79	-	34.68	7.19	34.88			
PK	5.4684G	61.10	68.20	-7.10	54.02	3	Horizontal	352	1.79	-	34.70	7.25	34.87			
PK	5.6316G	105.45	Inf	-Inf	98.43	3	Horizontal	352	1.79	-	34.54	7.38	34.90			
AV	5.6316G	93.53	Inf	-Inf	86.51	3	Horizontal	352	1.79	-	34.54	7.38	34.90			
PK	5.7308G	63.96	68.20	-4.24	57.14	3	Horizontal	352	1.79	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),3xRU242+RU484 MRU 1_4TX


5570MHz_TX

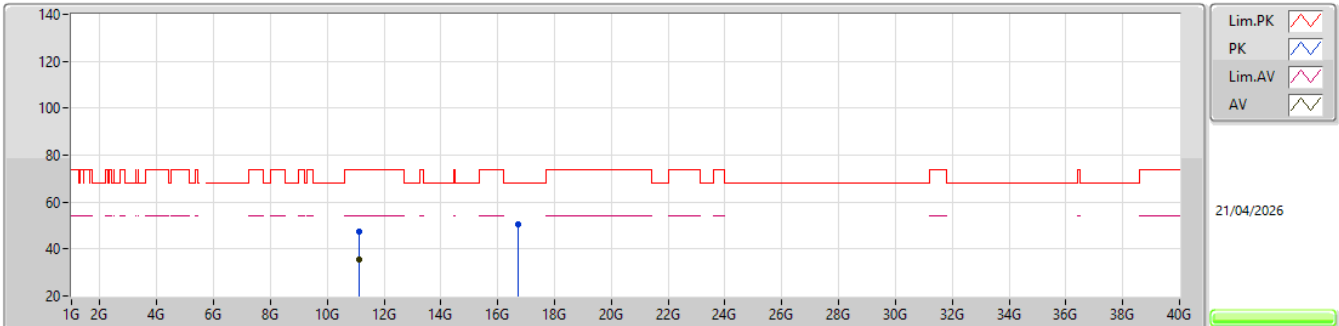EUT_Y_4TX
Setting 1/12.5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.12761G	47.24	74.00	-26.76	42.04	3	Vertical	75	1.43	-	38.99	12.35	46.14			
AV	11.1277G	35.30	54.00	-18.70	30.10	3	Vertical	75	1.43	-	38.99	12.35	46.14			
PK	16.70196G	50.68	68.20	-17.52	40.50	3	Vertical	99	1.78	-	39.91	14.97	44.70			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),3xRU242+RU484 MRU 1_4TX


5570MHz_TX

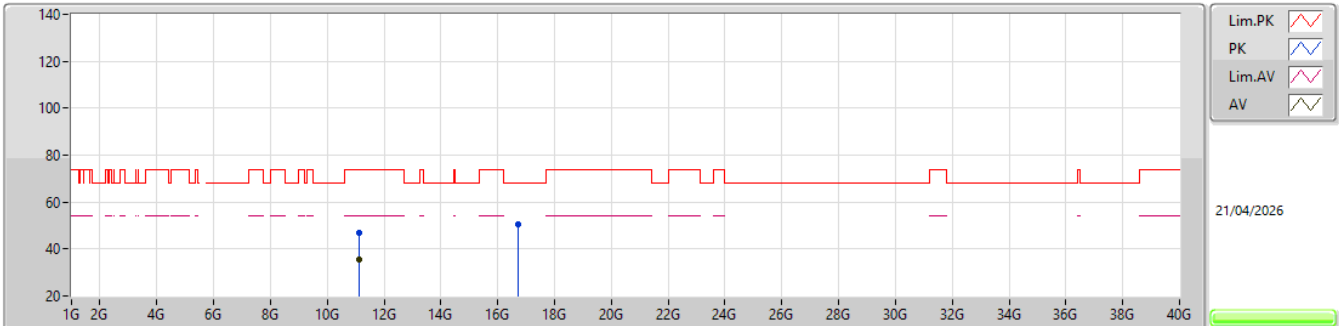EUT_Y_4TX
Setting 1/12.5
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.13079G	46.98	74.00	-27.02	41.78	3	Horizontal	92	1.66	-	38.98	12.35	46.13			
AV	11.13154G	35.39	54.00	-18.61	30.20	3	Horizontal	92	1.66	-	38.97	12.35	46.13			
PK	16.72245G	50.67	68.20	-17.53	40.41	3	Horizontal	188	2.08	-	39.99	14.98	44.71			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX


5570MHz_TX

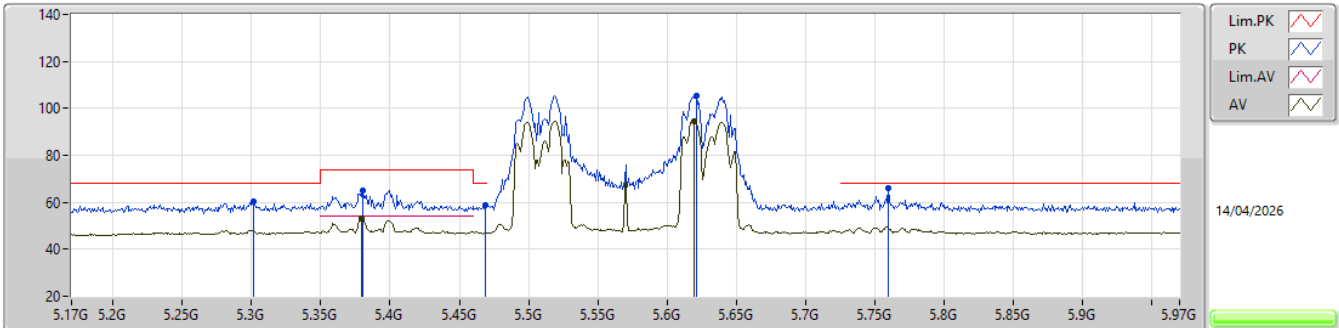EUT_Y_4TX
Setting 2.5/11
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3012G	60.37	68.20	-7.83	53.54	3	Vertical	314	1.99	-	34.60	7.13	34.90
PK	5.3804G	64.84	74.00	-9.16	57.87	3	Vertical	314	1.99	-	34.66	7.19	34.88
AV	5.3796G	53.00	54.00	-1.00	46.03	3	Vertical	314	1.99	-	34.66	7.19	34.88
PK	5.4684G	58.55	68.20	-9.65	51.47	3	Vertical	314	1.99	-	34.70	7.25	34.87
PK	5.6212G	105.46	Inf	-Inf	98.43	3	Vertical	314	1.99	-	34.56	7.37	34.90
AV	5.6196G	94.67	Inf	-Inf	87.64	3	Vertical	314	1.99	-	34.56	7.37	34.90
PK	5.7596G	65.89	68.20	-2.31	59.07	3	Vertical	314	1.99	-	34.28	7.48	34.94

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX

5570MHz_TX

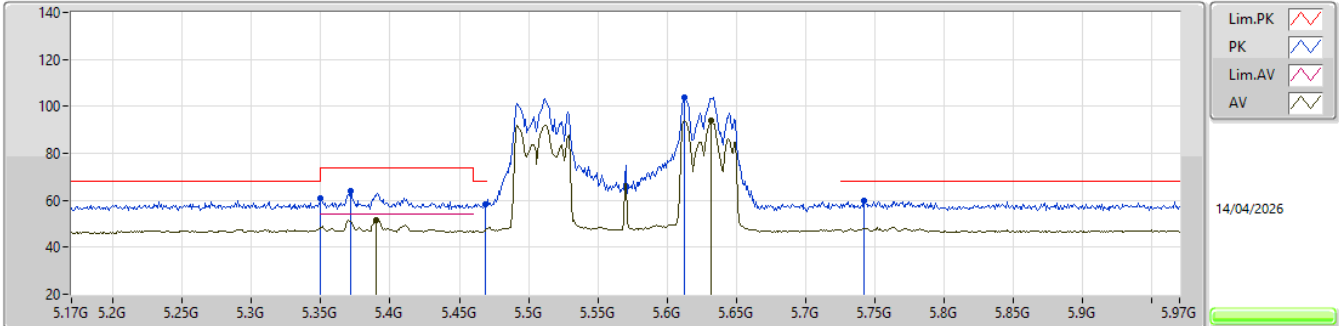


EUT_Y_4TX
Setting 2.5/11
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.35G	60.73	68.20	-7.47	53.86	3	Horizontal	354	1.80	-	34.60	7.16	34.89			
PK	5.3716G	64.16	74.00	-9.84	57.23	3	Horizontal	354	1.80	-	34.64	7.18	34.89			
AV	5.39G	51.39	54.00	-2.61	44.40	3	Horizontal	354	1.80	-	34.68	7.19	34.88			
PK	5.4692G	58.48	68.20	-9.72	51.40	3	Horizontal	354	1.80	-	34.70	7.25	34.87			
PK	5.6124G	103.70	Inf	-Inf	96.65	3	Horizontal	354	1.80	-	34.58	7.36	34.89			
AV	5.6316G	93.79	Inf	-Inf	86.77	3	Horizontal	354	1.80	-	34.54	7.38	34.90			
PK	5.742G	59.90	68.20	-8.30	53.07	3	Horizontal	354	1.80	-	34.30	7.46	34.93			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX


5570MHz_TX

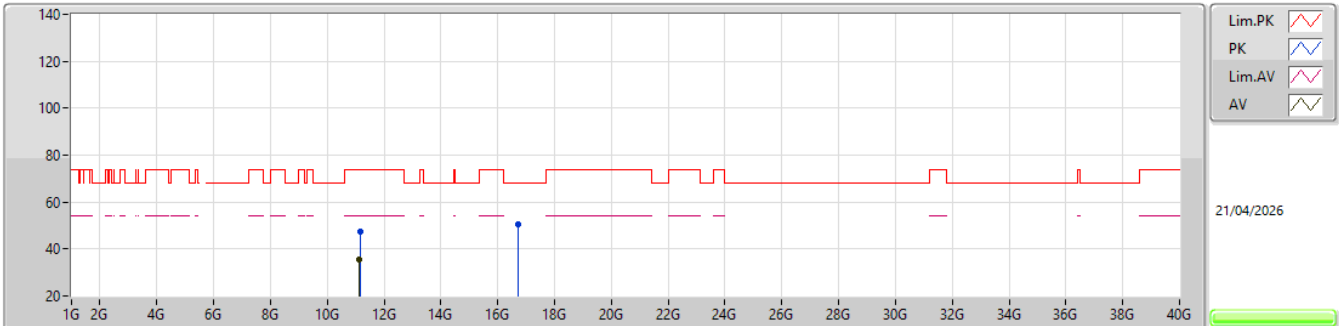EUT_Y_4TX
Setting 2.5/11
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14603G	47.27	74.00	-26.73	42.11	3	Vertical	93	1.87	-	38.92	12.36	46.12			
AV	11.12992G	35.70	54.00	-18.30	30.50	3	Vertical	93	1.87	-	38.98	12.35	46.13			
PK	16.70601G	50.26	68.20	-17.94	40.07	3	Vertical	148	1.96	-	39.92	14.97	44.70			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX

5570MHz_TX

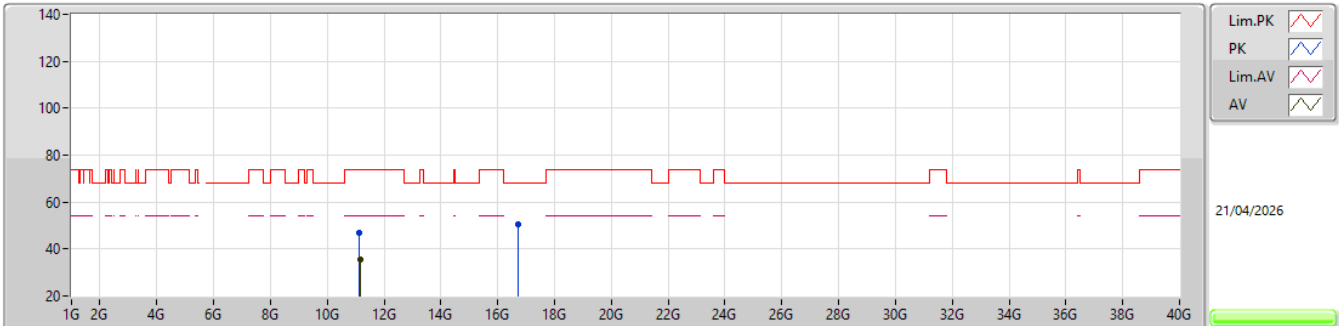EUT_Y_4TX
Setting 2.5/11
02-R-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.12905G	47.06	74.00	-26.94	41.86	3	Horizontal	236	1.97	-	38.98	12.35	46.13			
AV	11.1523G	35.68	54.00	-18.32	30.53	3	Horizontal	236	1.97	-	38.90	12.36	46.11			
PK	16.70181G	50.70	68.20	-17.50	40.52	3	Horizontal	274	1.64	-	39.91	14.97	44.70			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	Pass	AV	5.358G	53.96	54.00	-0.04	3	Vertical	328	2.30	-

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX


5210MHz_TX

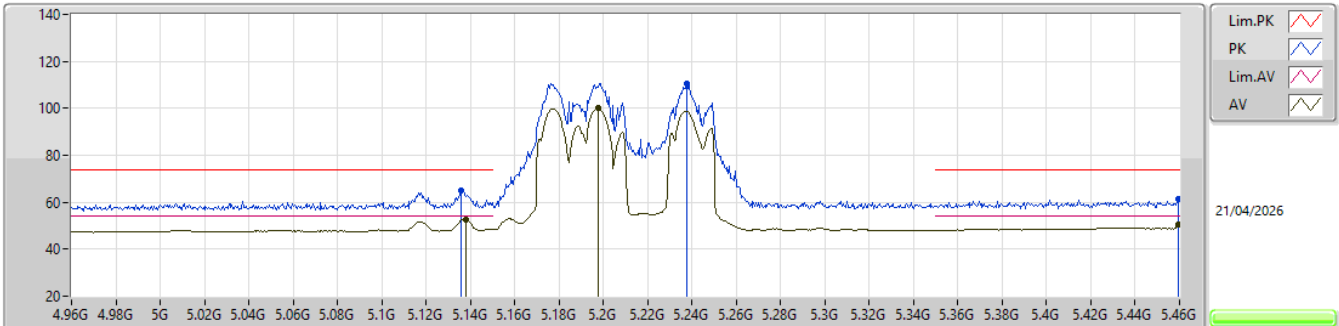EUT Y_4TX
Setting 12
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.136G	64.98	74.00	-9.02	54.65	3	Vertical	15	2.93	-	32.87	7.58	30.12
AV	5.138G	52.72	54.00	-1.28	42.38	3	Vertical	15	2.93	-	32.88	7.58	30.12
PK	5.2375G	110.55	Inf	-Inf	100.05	3	Vertical	15	2.93	-	33.05	7.62	30.17
AV	5.1975G	100.06	Inf	-Inf	89.72	3	Vertical	15	2.93	-	32.90	7.59	30.15
PK	5.4595G	61.44	74.00	-12.56	50.29	3	Vertical	15	2.93	-	33.66	7.78	30.29
AV	5.4595G	50.30	54.00	-3.70	39.15	3	Vertical	15	2.93	-	33.66	7.78	30.29

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX


5210MHz_TX

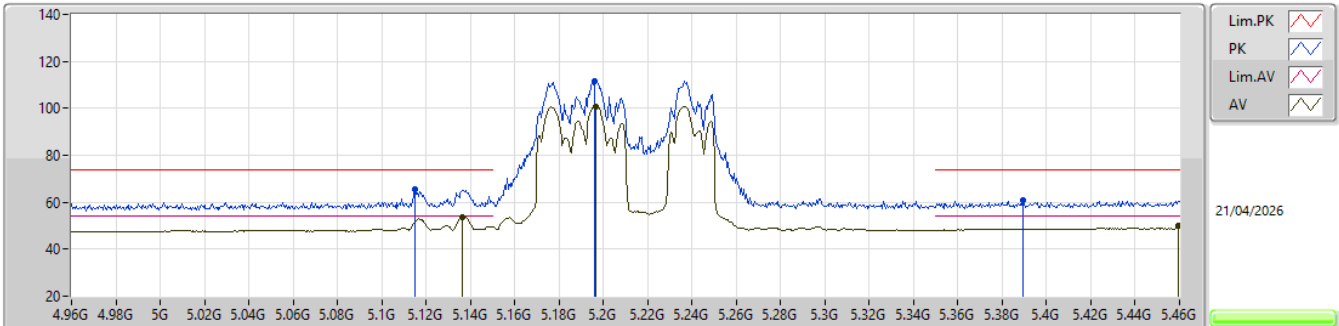EUT Y_4TX
Setting 12
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.115G	65.35	74.00	-8.65	55.06	3	Horizontal	338	1.79	-	32.83	7.57	30.11
AV	5.1365G	53.85	54.00	-0.15	43.52	3	Horizontal	338	1.79	-	32.87	7.58	30.12
PK	5.196G	111.49	Inf	-Inf	101.15	3	Horizontal	338	1.79	-	32.90	7.59	30.15
AV	5.1965G	100.86	Inf	-Inf	90.52	3	Horizontal	338	1.79	-	32.90	7.59	30.15
PK	5.3895G	60.94	74.00	-13.06	50.08	3	Horizontal	338	1.79	-	33.38	7.73	30.25
AV	5.4595G	50.09	54.00	-3.91	38.94	3	Horizontal	338	1.79	-	33.66	7.78	30.29

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX


5210MHz_TX

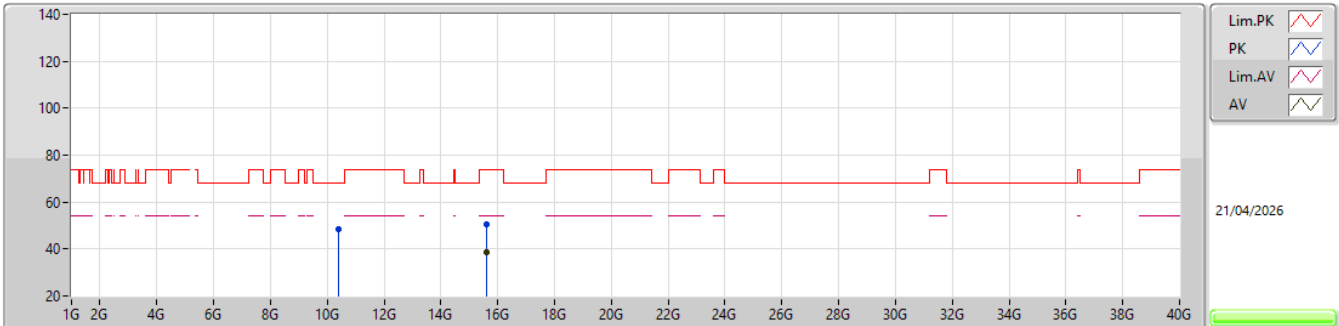EUT_Y_4TX
Setting 12
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38717G	48.23	68.20	-19.97	42.69	3	Vertical	212	1.77	-	38.90	11.98	45.34			
PK	15.62839G	50.70	74.00	-23.30	41.00	3	Vertical	57	1.41	-	38.33	14.51	43.14			
AV	15.5999G	38.85	54.00	-15.15	28.95	3	Vertical	57	1.41	-	38.50	14.48	43.08			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX

5210MHz_TX

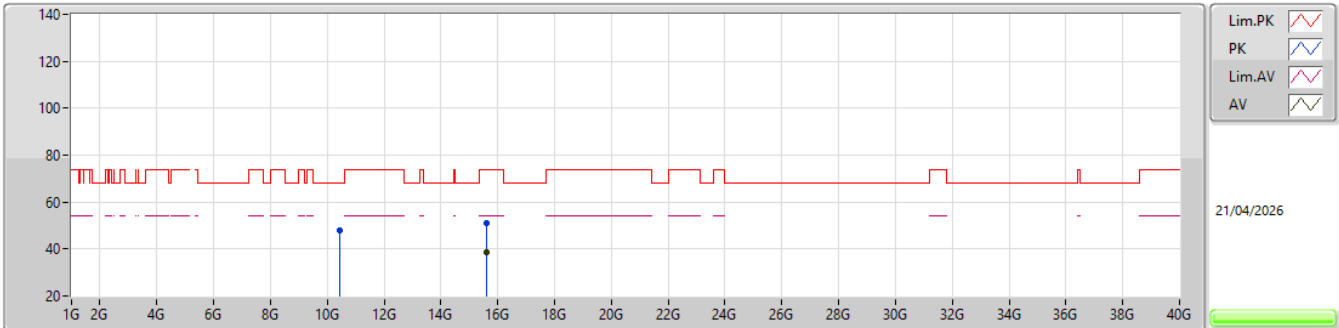


EUT_Y_4TX
Setting 12
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.45171G	48.18	68.20	-20.02	42.58	3	Horizontal	55	1.77	-	38.91	12.01	45.32			
PK	15.59962G	51.27	74.00	-22.73	41.37	3	Horizontal	139	1.88	-	38.50	14.48	43.08			
AV	15.60004G	38.85	54.00	-15.15	28.95	3	Horizontal	139	1.88	-	38.50	14.48	43.08			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX


5290MHz_TX

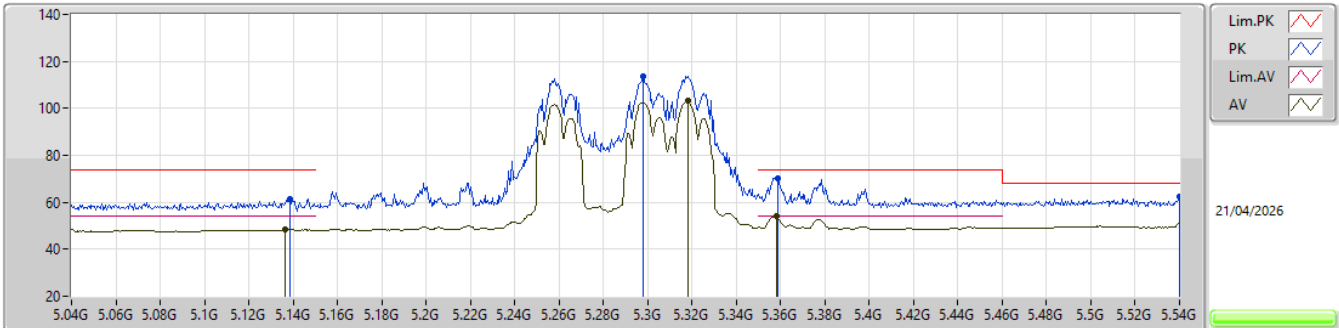EUT_Y_4TX
Setting 14.5
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1385G	61.37	74.00	-12.63	51.03	3	Vertical	328	2.30	-	32.88	7.58	30.12			
AV	5.1365G	48.41	54.00	-5.59	38.08	3	Vertical	328	2.30	-	32.87	7.58	30.12			
PK	5.298G	113.51	Inf	-Inf	102.85	3	Vertical	328	2.30	-	33.20	7.66	30.20			
AV	5.318G	103.19	Inf	-Inf	92.49	3	Vertical	328	2.30	-	33.24	7.68	30.22			
PK	5.3585G	70.26	74.00	-3.74	59.47	3	Vertical	328	2.30	-	33.32	7.71	30.24			
AV	5.358G	53.96	54.00	-0.04	43.17	3	Vertical	328	2.30	-	33.32	7.71	30.24			
PK	5.54G	62.23	68.20	-5.97	50.73	3	Vertical	328	2.30	-	33.98	7.82	30.30			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX

5290MHz_TX

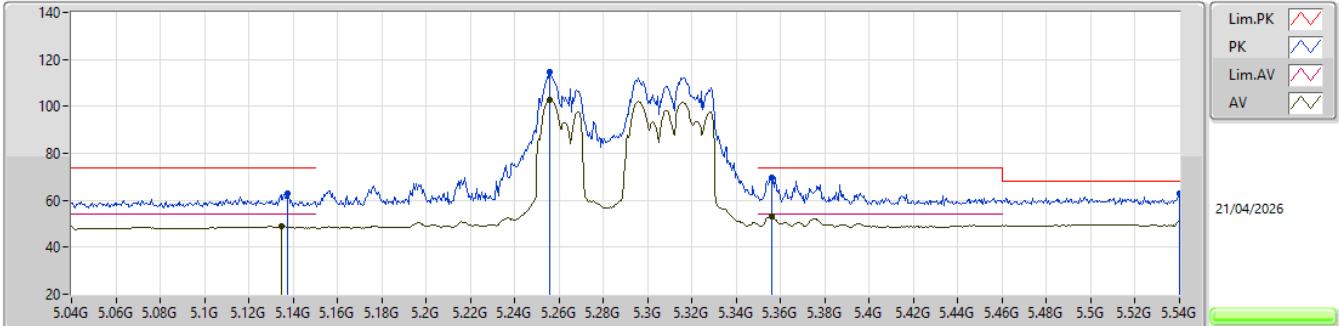


EUT_Y_4TX
Setting 14.5
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1375G	63.08	74.00	-10.92	52.75	3	Horizontal	337	1.80	-	32.87	7.58	30.12
AV	5.135G	48.84	54.00	-5.16	38.51	3	Horizontal	337	1.80	-	32.87	7.58	30.12
PK	5.2555G	114.47	Inf	-Inf	103.91	3	Horizontal	337	1.80	-	33.11	7.63	30.18
AV	5.256G	103.00	Inf	-Inf	92.44	3	Horizontal	337	1.80	-	33.11	7.63	30.18
PK	5.356G	69.88	74.00	-4.12	59.10	3	Horizontal	337	1.80	-	33.31	7.71	30.24
AV	5.356G	53.18	54.00	-0.82	42.40	3	Horizontal	337	1.80	-	33.31	7.71	30.24
PK	5.54G	62.76	68.20	-5.44	51.26	3	Horizontal	337	1.80	-	33.98	7.82	30.30

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX


5290MHz_TX

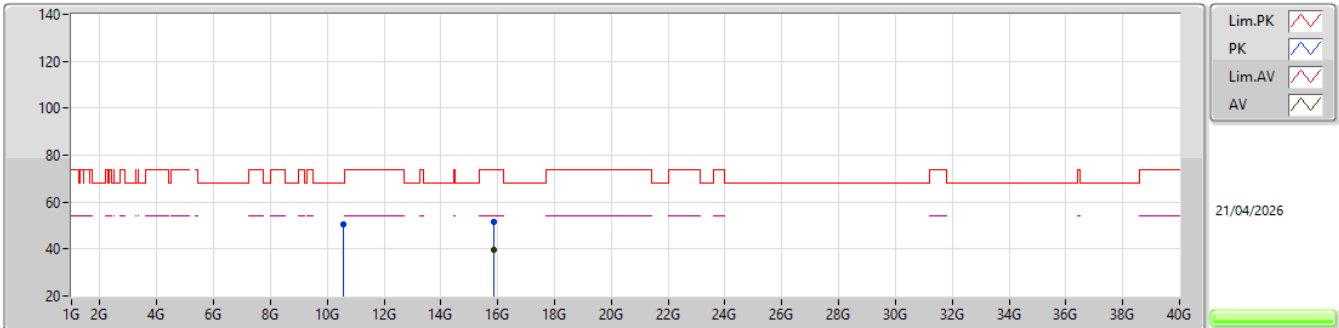EUT_Y_4TX
Setting 14.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57592G	50.77	68.20	-17.43	44.95	3	Vertical	76	1.95	-	39.20	12.07	45.45			
PK	15.8748G	51.74	74.00	-22.26	42.02	3	Vertical	308	1.86	-	38.65	14.72	43.65			
AV	15.88485G	39.78	54.00	-14.22	30.01	3	Vertical	308	1.86	-	38.71	14.73	43.67			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX


5290MHz_TX

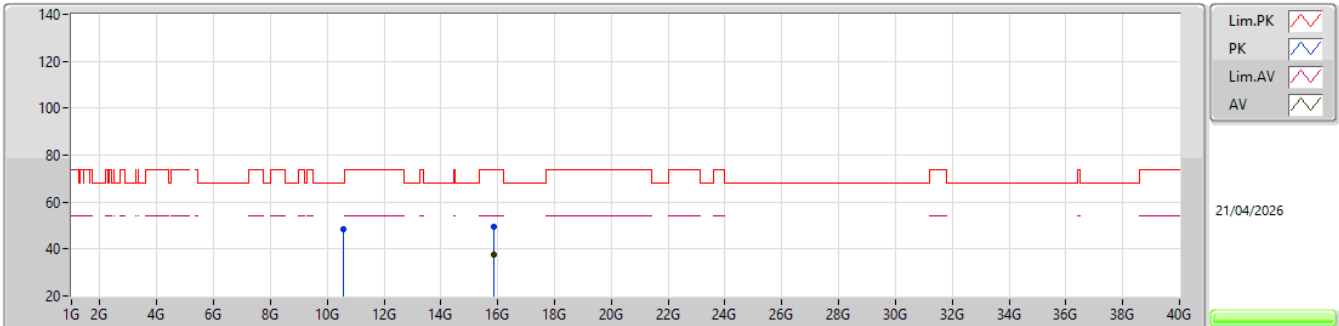EUT_Y_4TX
Setting 14.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57682G	48.66	68.20	-19.54	42.84	3	Horizontal	348	1.97	-	39.20	12.07	45.45			
PK	15.86145G	49.57	74.00	-24.43	39.91	3	Horizontal	210	1.59	-	38.57	14.71	43.62			
AV	15.88494G	37.69	54.00	-16.31	27.92	3	Horizontal	210	1.59	-	38.71	14.73	43.67			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX


5530MHz_TX

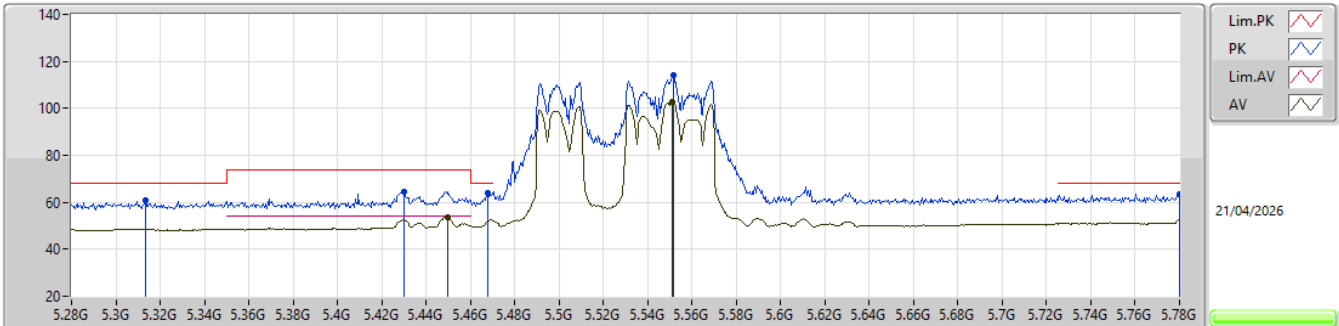EUT_Y_4TX
Setting 14
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3135G	61.05	68.20	-7.15	50.35	3	Vertical	19	2.91	-	33.23	7.68	30.21			
PK	5.43G	64.56	74.00	-9.44	53.55	3	Vertical	19	2.91	-	33.52	7.76	30.27			
PK	5.468G	63.94	68.20	-4.26	52.74	3	Vertical	19	2.91	-	33.71	7.78	30.29			
AV	5.4495G	53.74	54.00	-0.26	42.65	3	Vertical	19	2.91	-	33.60	7.77	30.28			
PK	5.5515G	114.17	Inf	-Inf	102.63	3	Vertical	19	2.91	-	34.00	7.83	30.29			
AV	5.551G	102.99	Inf	-Inf	91.45	3	Vertical	19	2.91	-	34.00	7.83	30.29			
PK	5.78G	63.39	68.20	-4.81	51.16	3	Vertical	19	2.91	-	34.26	8.18	30.21			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX

5530MHz_TX

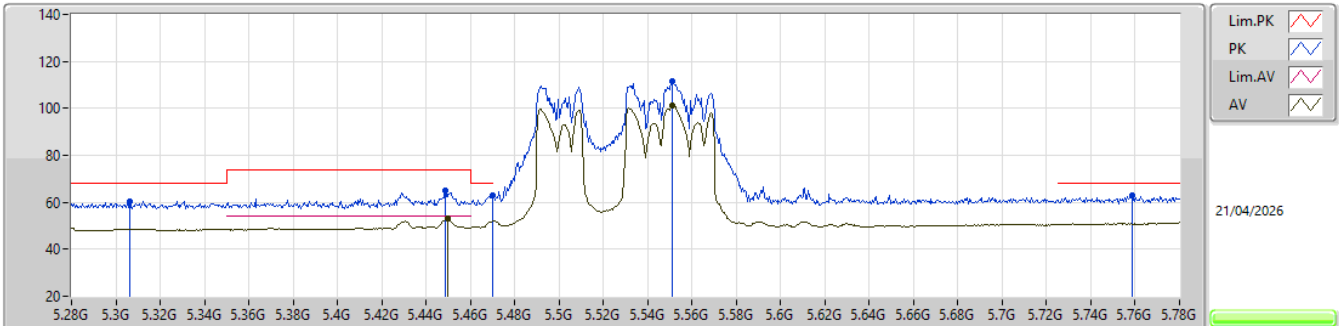


EUT_Y_4TX
Setting 14
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3065G	60.54	68.20	-7.66	49.87	3	Horizontal	346	2.04	-	33.21	7.67	30.21			
PK	5.4485G	64.89	74.00	-9.11	53.81	3	Horizontal	346	2.04	-	33.59	7.77	30.28			
AV	5.4495G	52.87	54.00	-1.13	41.78	3	Horizontal	346	2.04	-	33.60	7.77	30.28			
PK	5.47G	63.05	68.20	-5.15	51.84	3	Horizontal	346	2.04	-	33.72	7.78	30.29			
PK	5.551G	111.50	Inf	-Inf	99.96	3	Horizontal	346	2.04	-	34.00	7.83	30.29			
AV	5.551G	101.18	Inf	-Inf	89.64	3	Horizontal	346	2.04	-	34.00	7.83	30.29			
PK	5.7585G	62.82	68.20	-5.38	50.68	3	Horizontal	346	2.04	-	34.22	8.14	30.22			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX


5530MHz_TX

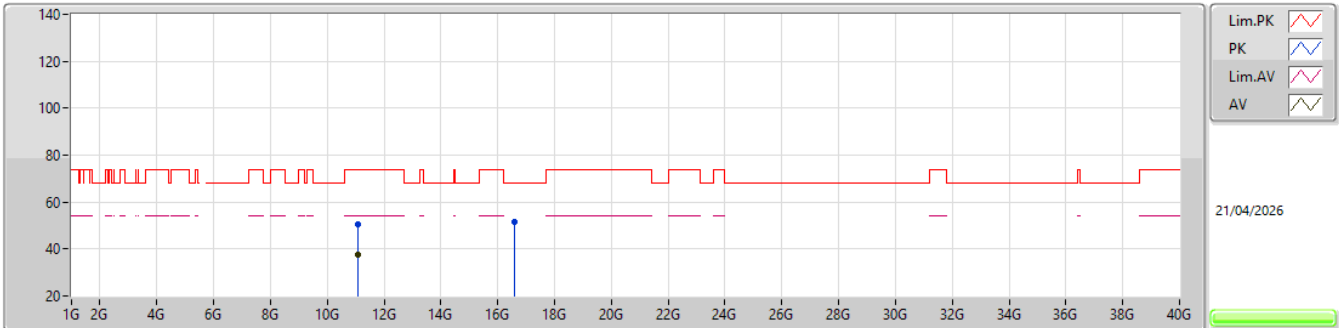EUT_Y_4TX
Setting 14
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.07179G	50.64	74.00	-23.36	45.35	3	Vertical	10	1.41	-	39.16	12.32	46.19			
AV	11.06588G	37.42	54.00	-16.58	32.12	3	Vertical	10	1.41	-	39.17	12.32	46.19			
PK	16.57917G	51.47	68.20	-16.73	41.43	3	Vertical	357	1.33	-	39.70	14.95	44.61			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX


5530MHz_TX

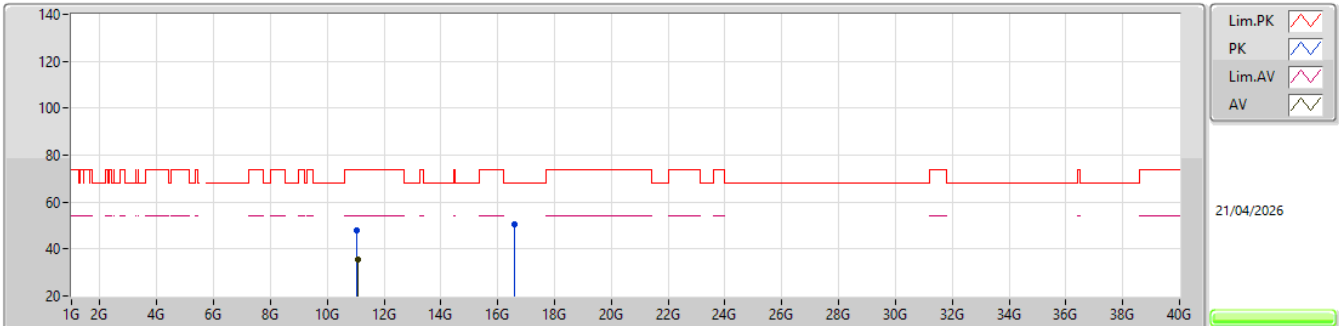EUT_Y_4TX
Setting 14
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05046G	47.80	74.00	-26.20	42.49	3	Horizontal	186	2.01	-	39.20	12.31	46.20			
AV	11.06966G	35.50	54.00	-18.50	30.21	3	Horizontal	186	2.01	-	39.16	12.32	46.19			
PK	16.60206G	50.40	68.20	-17.80	40.37	3	Horizontal	343	1.99	-	39.70	14.95	44.62			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX

5610MHz_TX

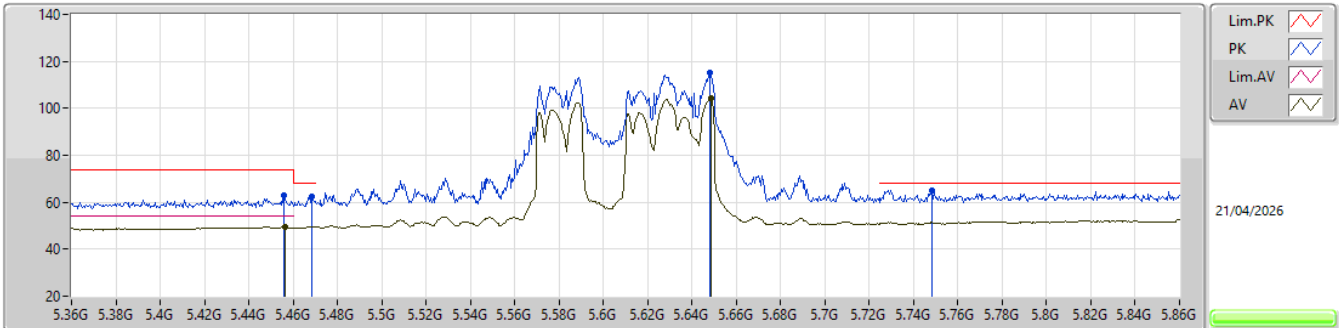


EUT_Y_4TX
Setting 14.5
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.456G	62.96	74.00	-11.04	51.84	3	Vertical	329	2.62	-	33.64	7.77	30.29			
AV	5.4565G	49.40	54.00	-4.60	38.28	3	Vertical	329	2.62	-	33.64	7.77	30.29			
PK	5.4685G	62.64	68.20	-5.56	51.44	3	Vertical	329	2.62	-	33.71	7.78	30.29			
PK	5.648G	114.98	Inf	-Inf	103.20	3	Vertical	329	2.62	-	34.10	7.94	30.26			
AV	5.6485G	104.15	Inf	-Inf	92.37	3	Vertical	329	2.62	-	34.10	7.94	30.26			
PK	5.7485G	65.24	68.20	-2.96	53.14	3	Vertical	329	2.62	-	34.20	8.12	30.22			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX


5610MHz_TX

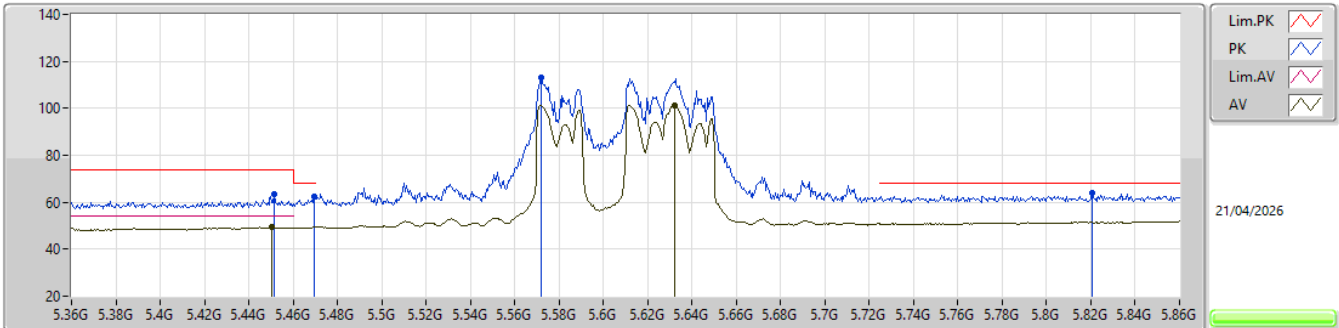EUT_Y_4TX
Setting 14.5
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4515G	63.57	74.00	-10.43	52.47	3	Horizontal	347	1.92	-	33.61	7.77	30.28			
AV	5.4505G	49.35	54.00	-4.65	38.26	3	Horizontal	347	1.92	-	33.60	7.77	30.28			
PK	5.4695G	62.55	68.20	-5.65	51.34	3	Horizontal	347	1.92	-	33.72	7.78	30.29			
PK	5.572G	113.18	Inf	-Inf	101.62	3	Horizontal	347	1.92	-	34.00	7.84	30.28			
AV	5.632G	101.30	Inf	-Inf	89.58	3	Horizontal	347	1.92	-	34.06	7.92	30.26			
PK	5.8205G	64.07	68.20	-4.13	51.64	3	Horizontal	347	1.92	-	34.42	8.20	30.19			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX

5610MHz_TX

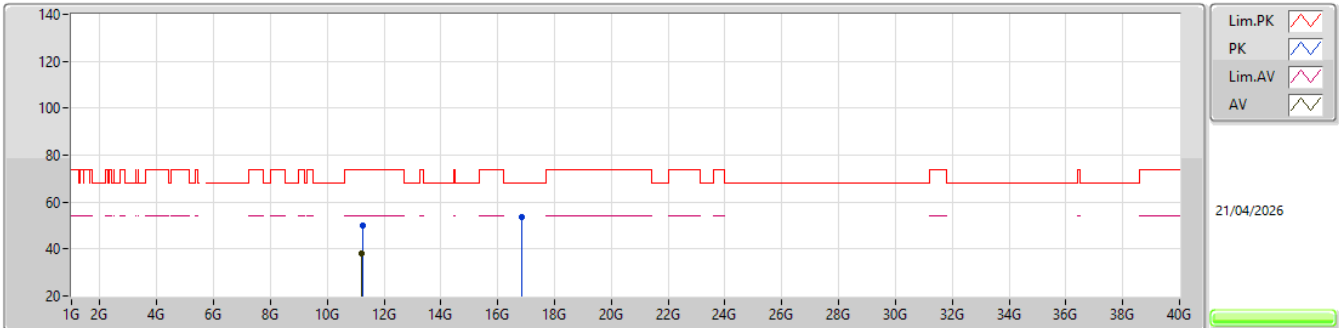


EUT_Y_4TX
Setting 14.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.23371G	49.82	74.00	-24.18	44.49	3	Vertical	296	1.79	-	38.97	12.40	46.04			
AV	11.20704G	37.93	54.00	-16.07	32.69	3	Vertical	296	1.79	-	38.91	12.39	46.06			
PK	16.84242G	53.74	68.20	-14.46	43.07	3	Vertical	80	1.31	-	40.47	15.00	44.80			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX


5610MHz_TX

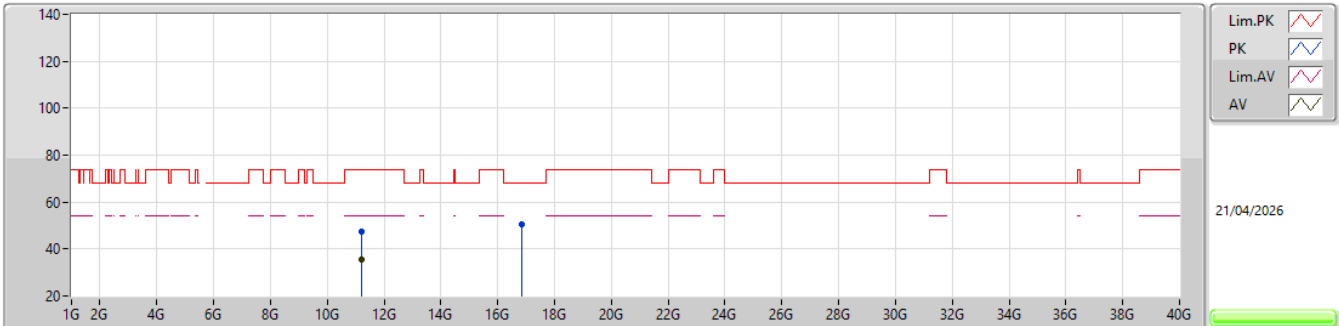EUT_Y_4TX
Setting 14.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22435G	47.20	74.00	-26.80	41.90	3	Horizontal	0	1.41	-	38.95	12.40	46.05			
AV	11.20509G	35.33	54.00	-18.67	30.10	3	Horizontal	0	1.41	-	38.91	12.39	46.07			
PK	16.83672G	50.58	68.20	-17.62	39.92	3	Horizontal	240	2.04	-	40.45	15.00	44.79			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX

5690MHz Straddle 5.47-5.725GHz_TX

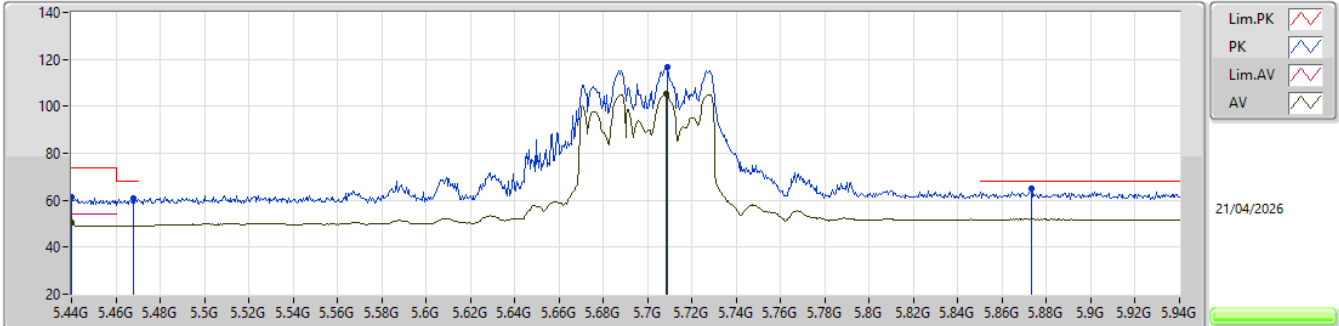


EUT_Y_4TX
Setting 15.5
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.44G	61.34	74.00	-12.66	50.30	3	Vertical	328	2.68	-	33.56	7.76	30.28
AV	5.44G	50.49	54.00	-3.51	39.45	3	Vertical	328	2.68	-	33.56	7.76	30.28
PK	5.468G	60.98	68.20	-7.22	49.78	3	Vertical	328	2.68	-	33.71	7.78	30.29
PK	5.709G	116.54	Inf	-Inf	104.52	3	Vertical	328	2.68	-	34.20	8.05	30.23
AV	5.7085G	105.28	Inf	-Inf	93.26	3	Vertical	328	2.68	-	34.20	8.05	30.23
PK	5.873G	64.82	68.20	-3.38	52.04	3	Vertical	328	2.68	-	34.78	8.18	30.18

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX

5690MHz Straddle 5.47-5.725GHz_TX

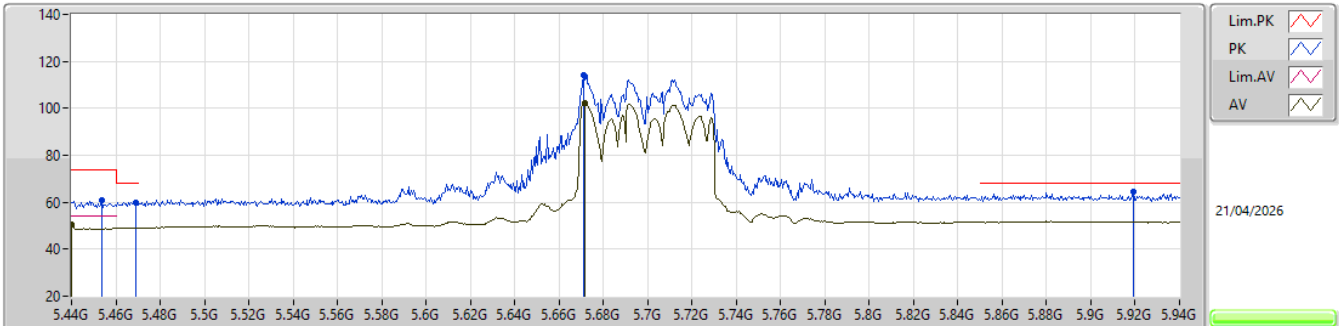


EUT_Y_4TX
Setting 15.5
02-R-P-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4535G	60.72	74.00	-13.28	49.62	3	Horizontal	347	1.90	-	33.62	7.77	30.29			
AV	5.44G	50.29	54.00	-3.71	39.25	3	Horizontal	347	1.90	-	33.56	7.76	30.28			
PK	5.469G	60.02	68.20	-8.18	48.82	3	Horizontal	347	1.90	-	33.71	7.78	30.29			
PK	5.671G	114.14	Inf	-Inf	102.27	3	Horizontal	347	1.90	-	34.14	7.98	30.25			
AV	5.6715G	102.37	Inf	-Inf	90.49	3	Horizontal	347	1.90	-	34.14	7.99	30.25			
PK	5.919G	64.71	68.20	-3.49	51.63	3	Horizontal	347	1.90	-	35.08	8.16	30.16			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX

5690MHz Straddle 5.47-5.725GHz_TX

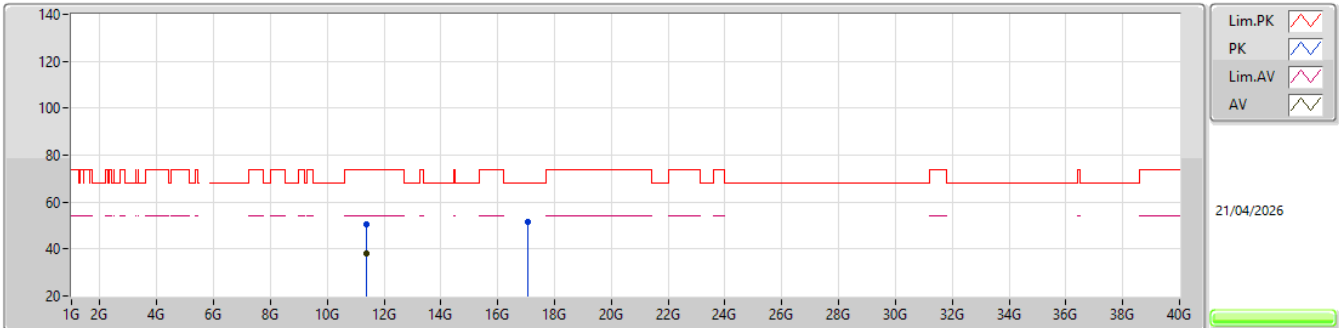


EUT_Y_4TX
Setting 15.5
02-R-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.38875G	50.67	74.00	-23.33	44.97	3	Vertical	178	2.95	-	39.12	12.48	45.90			
AV	11.38903G	38.35	54.00	-15.65	32.65	3	Vertical	178	2.95	-	39.12	12.48	45.90			
PK	17.07784G	51.61	68.20	-16.59	40.42	3	Vertical	226	1.02	-	41.11	15.05	44.97			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX


5690MHz Straddle 5.47-5.725GHz_TX

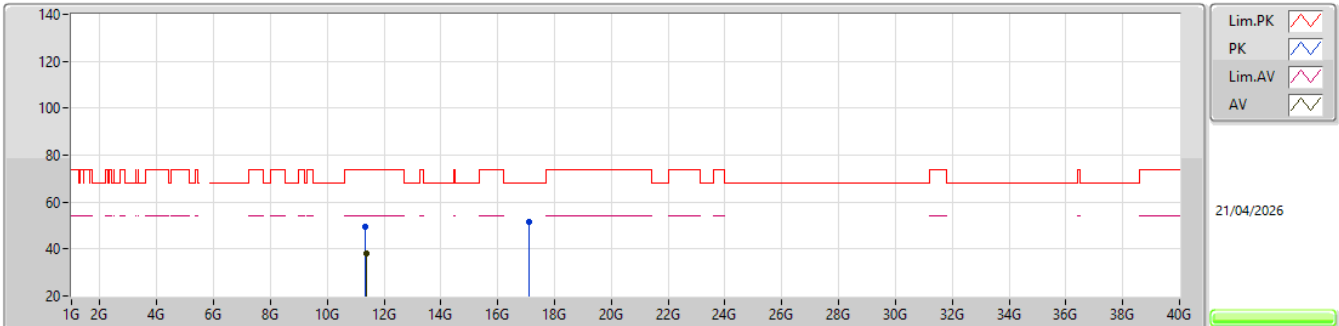EUT_Y_4TX
Setting 15.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.35613G	49.40	74.00	-24.60	43.68	3	Horizontal	59	2.97	-	39.19	12.46	45.93			
AV	11.37979G	37.93	54.00	-16.07	32.22	3	Horizontal	59	2.97	-	39.14	12.48	45.91			
PK	17.08645G	51.78	68.20	-16.42	40.56	3	Horizontal	236	1.80	-	41.15	15.05	44.98			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX

5775MHz_TX

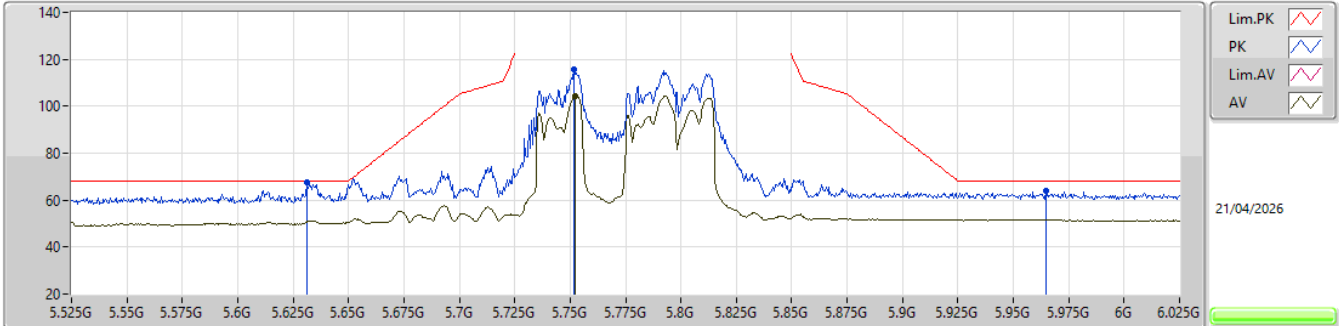


EUT_Y_4TX
Setting 14.5
02-R-P-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.631G	67.75	68.20	-0.45	56.04	3	Vertical	328	2.63	-	34.06	7.91	30.26				
PK	5.7515G	115.70	Inf	-Inf	103.59	3	Vertical	328	2.63	-	34.20	8.13	30.22				
AV	5.7525G	104.30	Inf	-Inf	92.18	3	Vertical	328	2.63	-	34.21	8.13	30.22				
PK	5.9645G	63.94	68.20	-4.26	50.71	3	Vertical	328	2.63	-	35.23	8.14	30.14				

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX

5775MHz_TX

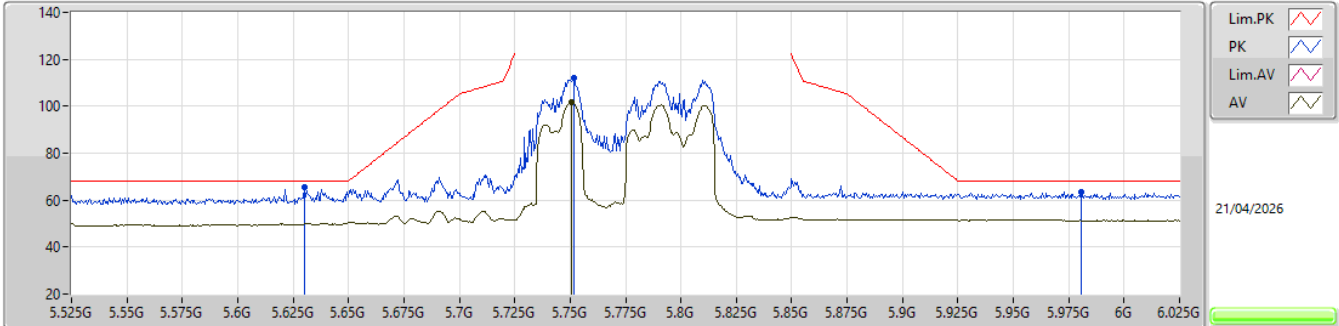


EUT_Y_4TX
Setting 14.5
02-R-P-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.63G	65.70	68.20	-2.50	53.99	3	Horizontal	355	2.00	-	34.06	7.91	30.26			
PK	5.7515G	112.02	Inf	-Inf	99.91	3	Horizontal	355	2.00	-	34.20	8.13	30.22			
AV	5.7505G	101.55	Inf	-Inf	89.45	3	Horizontal	355	2.00	-	34.20	8.12	30.22			
PK	5.9805G	63.70	68.20	-4.50	50.45	3	Horizontal	355	2.00	-	35.26	8.13	30.14			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX

5775MHz_TX

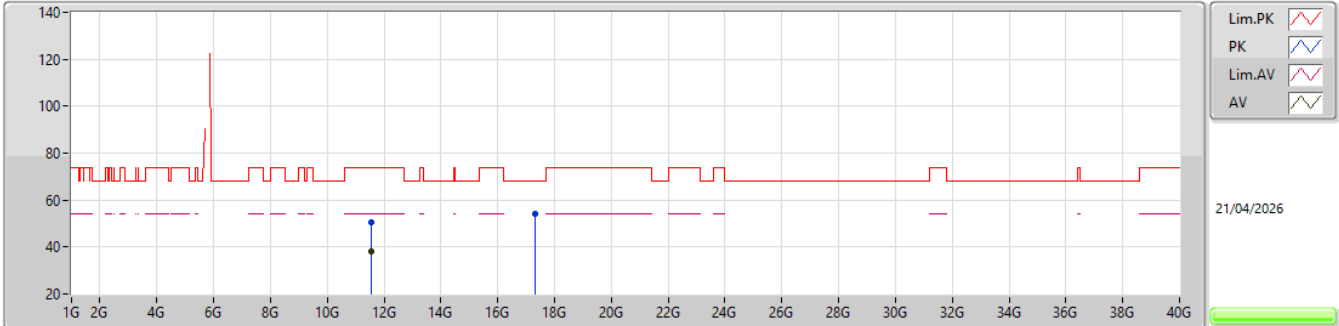


EUT_Y_4TX
Setting 14.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55486G	50.41	74.00	-23.59	44.56	3	Vertical	261	1.34	-	39.10	12.57	45.82			
AV	11.55093G	37.92	54.00	-16.08	32.08	3	Vertical	261	1.34	-	39.10	12.56	45.82			
PK	17.33331G	54.26	68.20	-13.94	42.44	3	Vertical	149	1.35	-	41.90	15.10	45.18			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX


5775MHz_TX

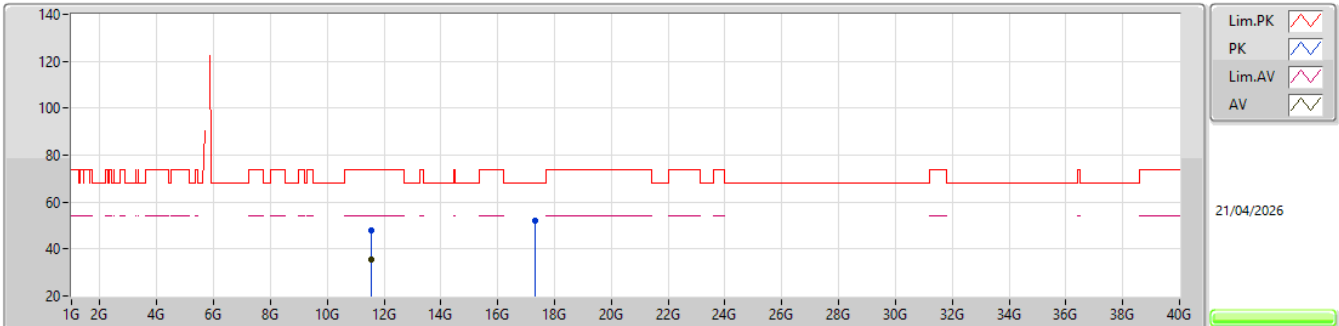EUT_Y_4TX
Setting 14.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55549G	47.82	74.00	-26.18	41.97	3	Horizontal	164	1.42	-	39.10	12.57	45.82			
AV	11.55813G	35.76	54.00	-18.24	29.91	3	Horizontal	164	1.42	-	39.10	12.57	45.82			
PK	17.31402G	52.09	68.20	-16.11	40.25	3	Horizontal	122	2.10	-	41.90	15.10	45.16			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX

5250MHz Straddle 5.25-5.35GHz_TX

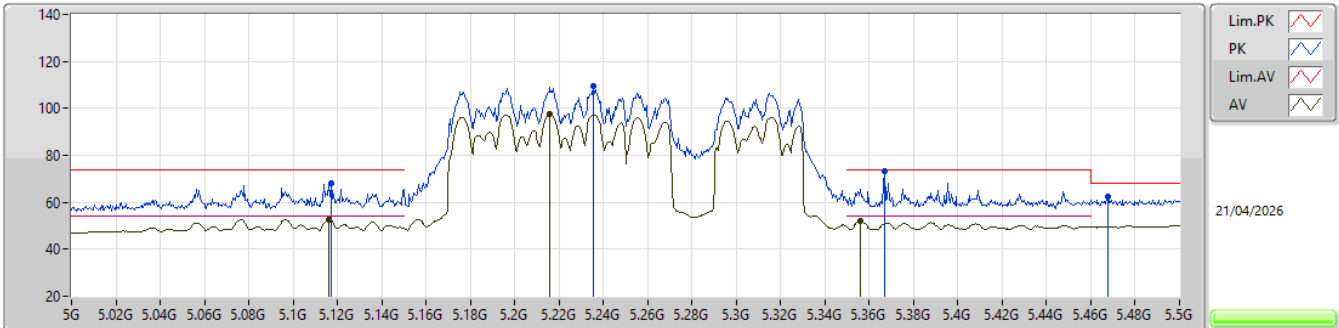


EUT_Y_4TX
Setting 13
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.117G	67.88	74.00	-6.12	57.59	3	Vertical	348	2.88	-	32.83	7.57	30.11			
AV	5.116G	52.76	54.00	-1.24	42.47	3	Vertical	348	2.88	-	32.83	7.57	30.11			
PK	5.2355G	109.64	Inf	-Inf	99.15	3	Vertical	348	2.88	-	33.04	7.62	30.17			
AV	5.216G	97.71	Inf	-Inf	87.31	3	Vertical	348	2.88	-	32.96	7.60	30.16			
PK	5.367G	73.09	74.00	-0.91	62.28	3	Vertical	348	2.88	-	33.33	7.72	30.24			
AV	5.356G	52.06	54.00	-1.94	41.28	3	Vertical	348	2.88	-	33.31	7.71	30.24			
PK	5.4675G	62.52	68.20	-5.68	51.33	3	Vertical	348	2.88	-	33.70	7.78	30.29			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX


5250MHz Straddle 5.25-5.35GHz_TX

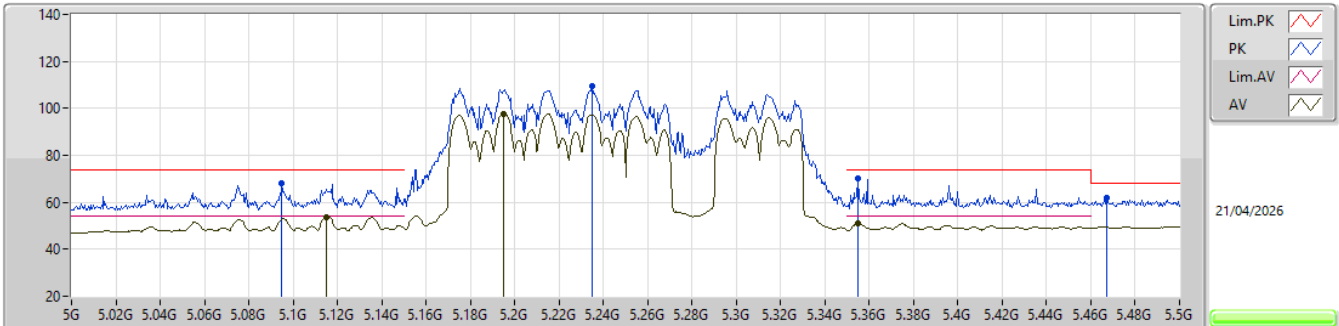EUT_Y_4TX
Setting 13
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.095G	68.18	74.00	-5.82	57.89	3	Horizontal	334	1.92	-	32.82	7.57	30.10			
AV	5.115G	53.77	54.00	-0.23	43.48	3	Horizontal	334	1.92	-	32.83	7.57	30.11			
PK	5.235G	109.31	Inf	-Inf	98.82	3	Horizontal	334	1.92	-	33.04	7.62	30.17			
AV	5.195G	97.79	Inf	-Inf	87.45	3	Horizontal	334	1.92	-	32.90	7.59	30.15			
PK	5.355G	70.31	74.00	-3.69	59.52	3	Horizontal	334	1.92	-	33.31	7.71	30.23			
AV	5.355G	51.28	54.00	-2.72	40.49	3	Horizontal	334	1.92	-	33.31	7.71	30.23			
PK	5.467G	61.78	68.20	-6.42	50.59	3	Horizontal	334	1.92	-	33.70	7.78	30.29			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX


5250MHz Straddle 5.25-5.35GHz_TX

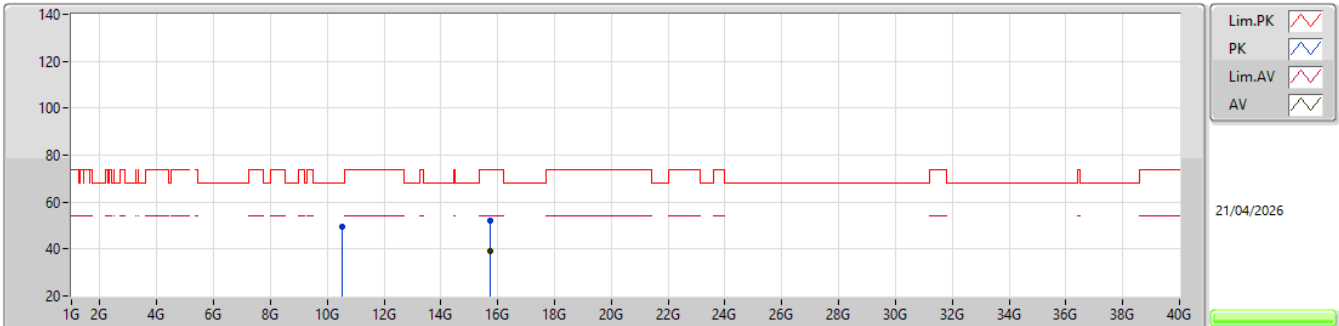EUT_Y_4TX
Setting 13
02-R-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.51335G	49.55	68.20	-18.65	43.72	3	Vertical	239	1.36	-	39.13	12.04	45.34			
PK	15.74586G	51.92	74.00	-22.08	42.30	3	Vertical	261	1.59	-	38.39	14.61	43.38			
AV	15.74127G	39.05	54.00	-14.95	29.43	3	Vertical	261	1.59	-	38.38	14.61	43.37			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX

5250MHz Straddle 5.25-5.35GHz_TX

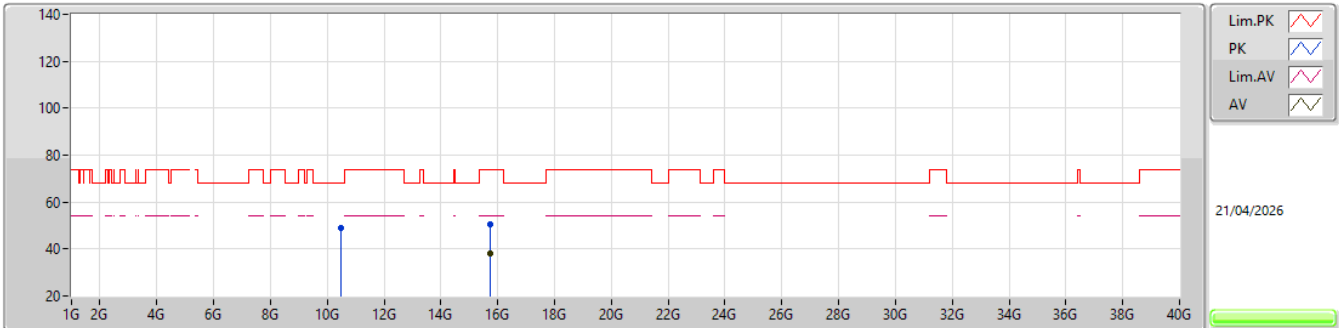


EUT_Y_4TX
Setting 13
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49187G	49.13	68.20	-19.07	43.34	3	Horizontal	60	2.07	-	39.07	12.03	45.31			
PK	15.7419G	50.31	74.00	-23.69	40.69	3	Horizontal	153	2.10	-	38.38	14.61	43.37			
AV	15.74253G	38.05	54.00	-15.95	28.42	3	Horizontal	153	2.10	-	38.39	14.61	43.37			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX


5250MHz Straddle 5.25-5.35GHz_TX

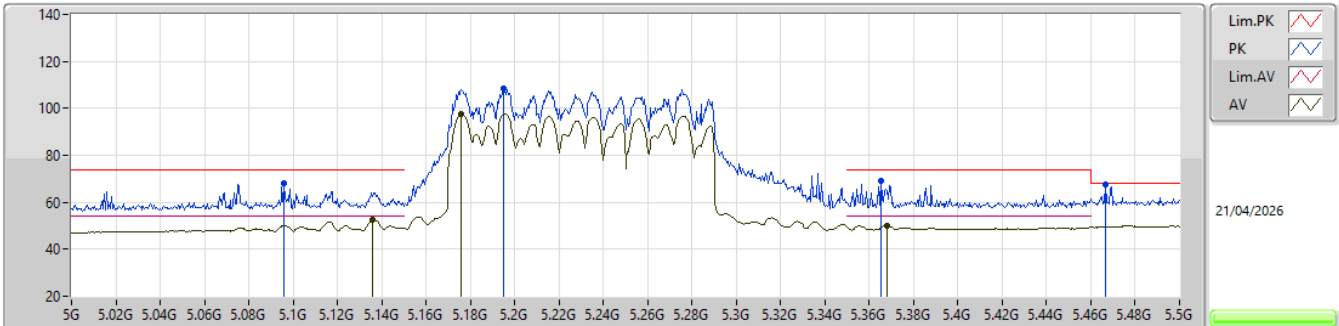EUT_Y_4TX
Setting 13
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.096G	67.99	74.00	-6.01	57.70	3	Vertical	348	2.92	-	32.82	7.57	30.10			
AV	5.136G	52.84	54.00	-1.16	42.51	3	Vertical	348	2.92	-	32.87	7.58	30.12			
PK	5.195G	108.23	Inf	-Inf	97.89	3	Vertical	348	2.92	-	32.90	7.59	30.15			
AV	5.176G	97.83	Inf	-Inf	87.48	3	Vertical	348	2.92	-	32.90	7.59	30.14			
PK	5.3655G	69.15	74.00	-4.85	58.35	3	Vertical	348	2.92	-	33.33	7.71	30.24			
AV	5.368G	50.15	54.00	-3.85	39.33	3	Vertical	348	2.92	-	33.34	7.72	30.24			
PK	5.4665G	67.58	68.20	-0.62	56.39	3	Vertical	348	2.92	-	33.70	7.78	30.29			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX


5250MHz Straddle 5.25-5.35GHz_TX

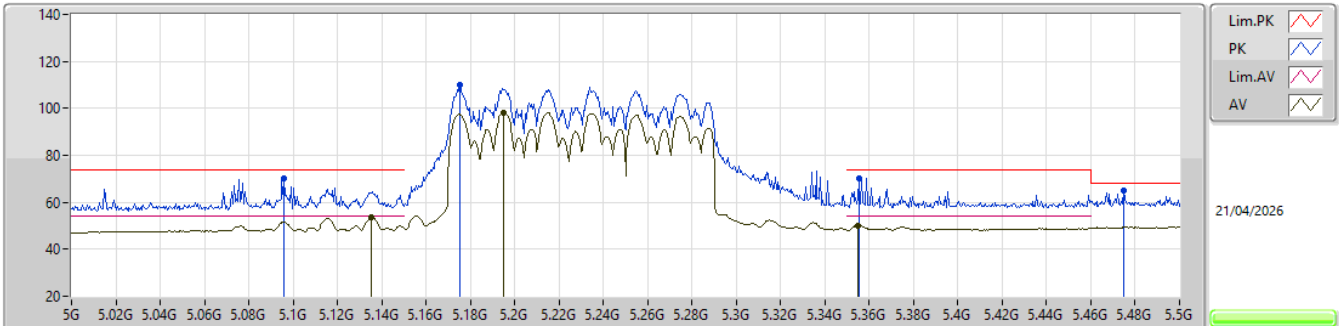EUT_Y_4TX
Setting 13
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.096G	70.20	74.00	-3.80	59.91	3	Horizontal	334	1.91	-	32.82	7.57	30.10			
AV	5.1355G	53.73	54.00	-0.27	43.40	3	Horizontal	334	1.91	-	32.87	7.58	30.12			
PK	5.1755G	109.84	Inf	-Inf	99.49	3	Horizontal	334	1.91	-	32.90	7.59	30.14			
AV	5.195G	98.16	Inf	-Inf	87.82	3	Horizontal	334	1.91	-	32.90	7.59	30.15			
PK	5.3555G	70.33	74.00	-3.67	59.54	3	Horizontal	334	1.91	-	33.31	7.71	30.23			
AV	5.355G	50.24	54.00	-3.76	39.45	3	Horizontal	334	1.91	-	33.31	7.71	30.23			
PK	5.475G	65.09	68.20	-3.11	53.85	3	Horizontal	334	1.91	-	33.75	7.79	30.30			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX


5250MHz Straddle 5.25-5.35GHz_TX

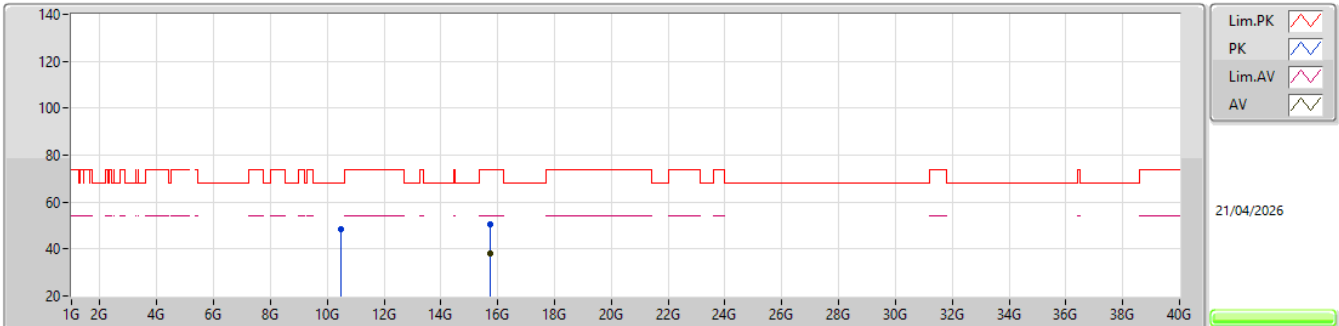EUT_Y_4TX
Setting 13
02-R-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.50093G	48.56	68.20	-19.64	42.74	3	Vertical	179	1.60	-	39.10	12.03	45.31			
PK	15.74475G	50.64	74.00	-23.36	41.02	3	Vertical	116	1.49	-	38.39	14.61	43.38			
AV	15.73797G	38.14	54.00	-15.86	28.52	3	Vertical	116	1.49	-	38.38	14.60	43.36			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX

5250MHz Straddle 5.25-5.35GHz_TX

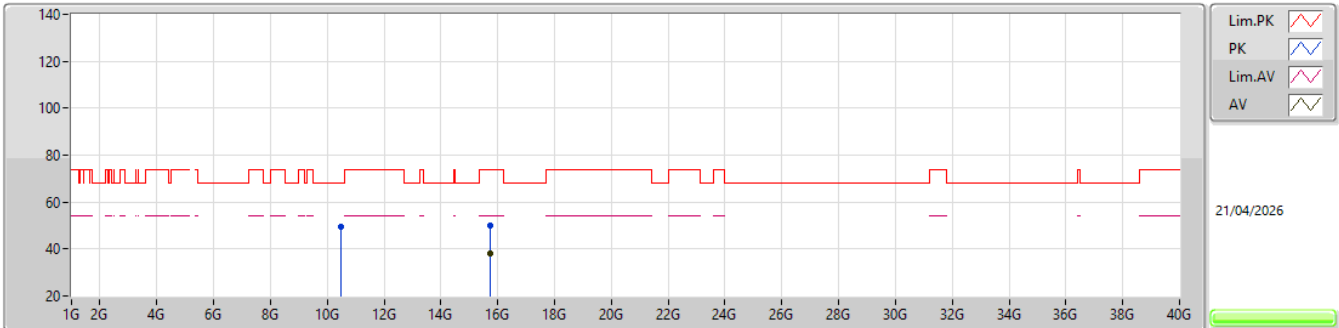


EUT_Y_4TX
Setting 13
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49352G	49.34	68.20	-18.86	43.55	3	Horizontal	239	2.04	-	39.07	12.03	45.31			
PK	15.73935G	50.22	74.00	-23.78	40.61	3	Horizontal	53	1.59	-	38.38	14.60	43.37			
AV	15.74217G	38.22	54.00	-15.78	28.60	3	Horizontal	53	1.59	-	38.38	14.61	43.37			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX


5570MHz_TX

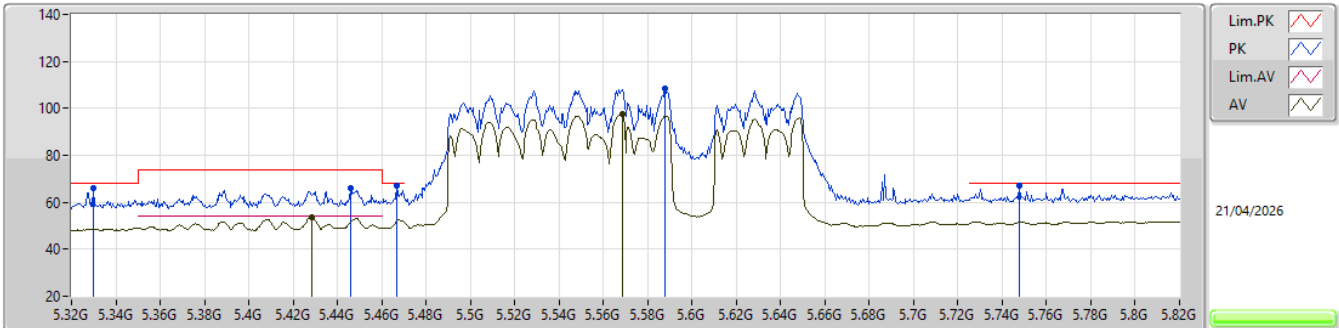EUT_Y_4TX
Setting 12
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.33G	65.98	68.20	-2.22	55.25	3	Vertical	328	2.80	-	33.26	7.69	30.22
PK	5.446G	66.29	74.00	-7.71	55.22	3	Vertical	328	2.80	-	33.58	7.77	30.28
AV	5.4285G	53.48	54.00	-0.52	42.48	3	Vertical	328	2.80	-	33.51	7.76	30.27
PK	5.467G	67.32	68.20	-0.88	56.13	3	Vertical	328	2.80	-	33.70	7.78	30.29
PK	5.588G	108.24	Inf	-Inf	96.67	3	Vertical	328	2.80	-	34.00	7.85	30.28
AV	5.5685G	97.58	Inf	-Inf	86.03	3	Vertical	328	2.80	-	34.00	7.84	30.29
PK	5.7475G	66.86	68.20	-1.34	54.76	3	Vertical	328	2.80	-	34.20	8.12	30.22

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX

5570MHz_TX

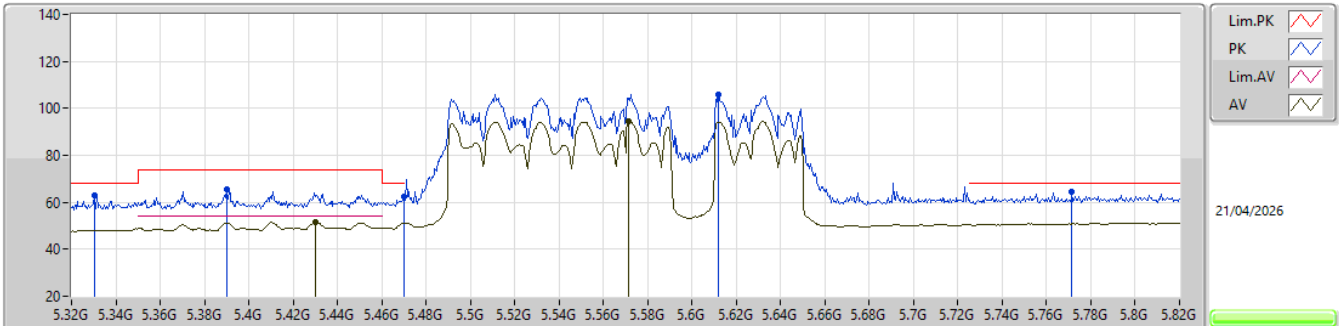


EUT_V_4TX
Setting 12
02-R-P-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3305G	63.12	68.20	-5.08	52.39	3	Horizontal	347	1.88	-	33.26	7.69	30.22			
PK	5.39G	65.65	74.00	-8.35	54.79	3	Horizontal	347	1.88	-	33.38	7.73	30.25			
AV	5.43G	51.49	54.00	-2.51	40.48	3	Horizontal	347	1.88	-	33.52	7.76	30.27			
PK	5.47G	62.40	68.20	-5.80	51.19	3	Horizontal	347	1.88	-	33.72	7.78	30.29			
PK	5.612G	105.98	Inf	-Inf	94.35	3	Horizontal	347	1.88	-	34.02	7.88	30.27			
AV	5.5715G	94.61	Inf	-Inf	83.05	3	Horizontal	347	1.88	-	34.00	7.84	30.28			
PK	5.7715G	64.37	68.20	-3.83	52.18	3	Horizontal	347	1.88	-	34.24	8.16	30.21			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX


5570MHz_TX

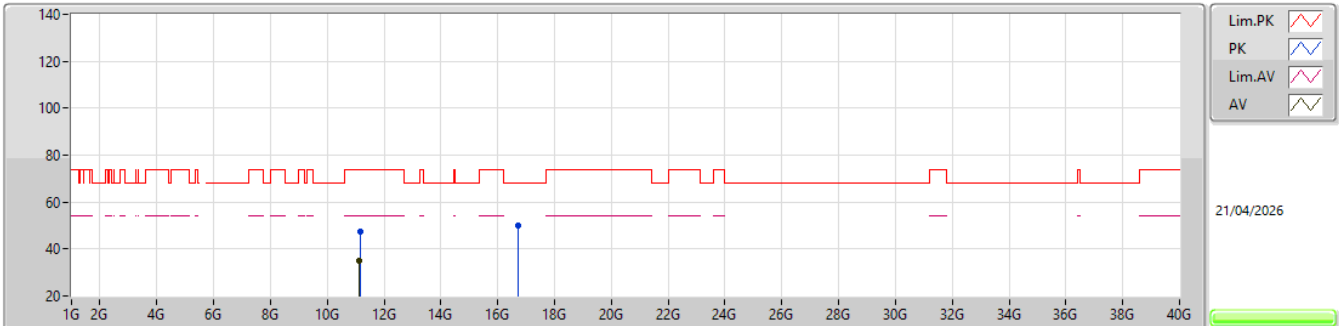EUT_Y_4TX
Setting 12
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14675G	47.27	74.00	-26.73	42.12	3	Vertical	242	1.82	-	38.91	12.36	46.12			
AV	11.1307G	34.99	54.00	-19.01	29.79	3	Vertical	242	1.82	-	38.98	12.35	46.13			
PK	16.7169G	50.08	68.20	-18.12	39.84	3	Vertical	133	1.56	-	39.97	14.98	44.71			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX


5570MHz_TX

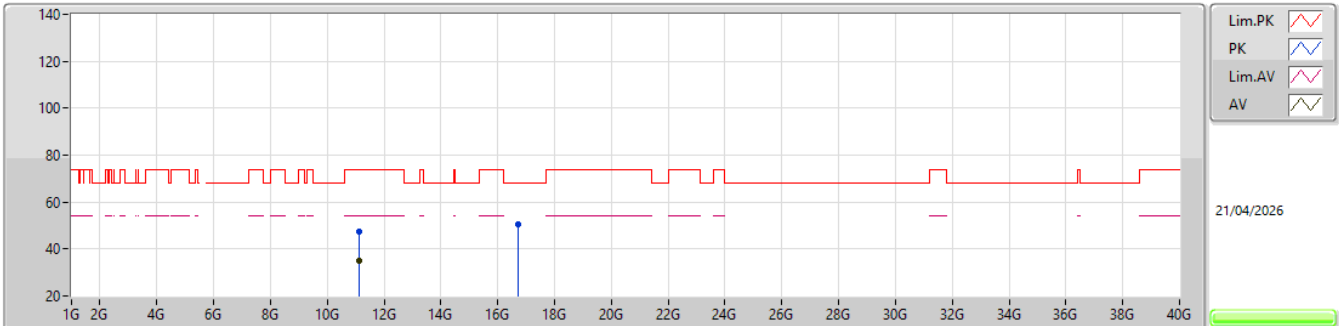EUT_Y_4TX
Setting 12
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.12878G	47.33	74.00	-26.67	42.13	3	Horizontal	46	1.38	-	38.98	12.35	46.13			
AV	11.13055G	35.12	54.00	-18.88	29.92	3	Horizontal	46	1.38	-	38.98	12.35	46.13			
PK	16.71252G	50.50	68.20	-17.70	40.27	3	Horizontal	168	1.39	-	39.95	14.98	44.70			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX


5570MHz_TX

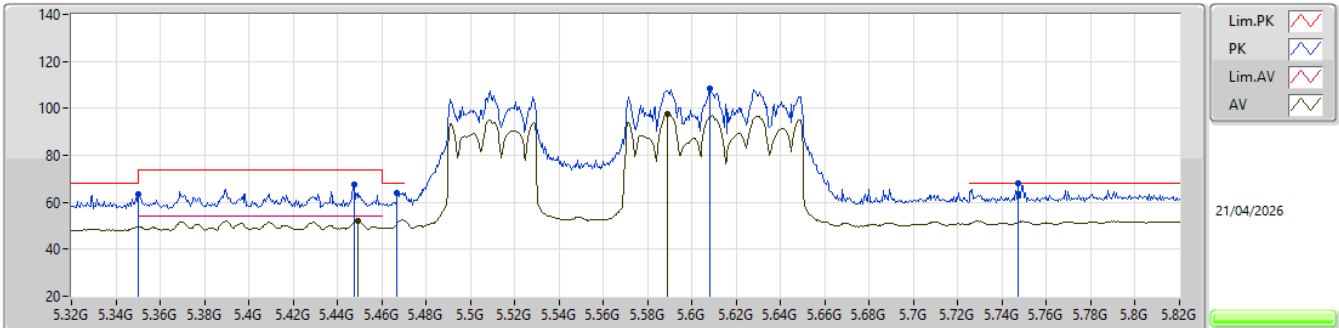EUT_Y_4TX
Setting 11.5
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.35G	63.32	68.20	-4.88	52.55	3	Vertical	331	2.77	-	33.30	7.70	30.23			
PK	5.4475G	67.46	74.00	-6.54	56.38	3	Vertical	331	2.77	-	33.59	7.77	30.28			
AV	5.449G	52.07	54.00	-1.93	40.98	3	Vertical	331	2.77	-	33.60	7.77	30.28			
PK	5.467G	64.10	68.20	-4.10	52.91	3	Vertical	331	2.77	-	33.70	7.78	30.29			
PK	5.608G	108.50	Inf	-Inf	96.88	3	Vertical	331	2.77	-	34.02	7.87	30.27			
AV	5.589G	97.50	Inf	-Inf	85.93	3	Vertical	331	2.77	-	34.00	7.85	30.28			
PK	5.747G	67.95	68.20	-0.25	55.85	3	Vertical	331	2.77	-	34.20	8.12	30.22			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX


5570MHz_TX

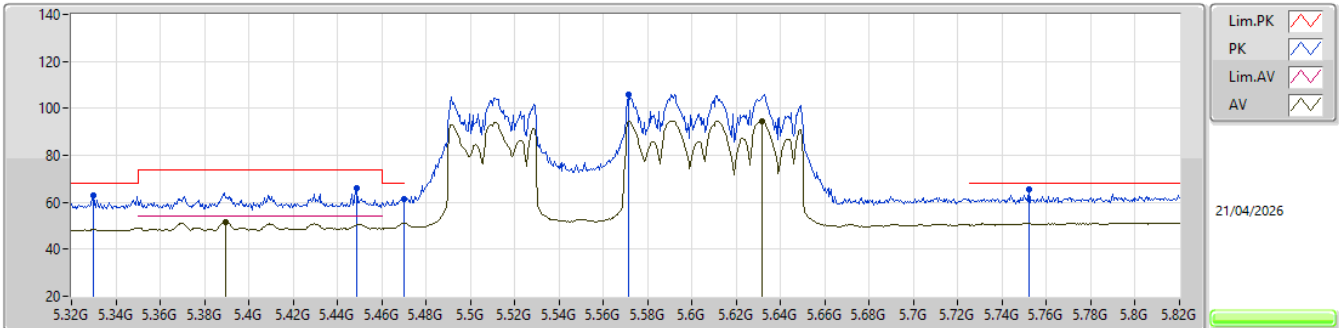EUT_Y_4TX
Setting 11.5
02-R-P-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.33G	63.16	68.20	-5.04	52.43	3	Horizontal	345	1.96	-	33.26	7.69	30.22
PK	5.4485G	65.83	74.00	-8.17	54.75	3	Horizontal	345	1.96	-	33.59	7.77	30.28
AV	5.3895G	51.54	54.00	-2.46	40.68	3	Horizontal	345	1.96	-	33.38	7.73	30.25
PK	5.47G	61.18	68.20	-7.02	49.97	3	Horizontal	345	1.96	-	33.72	7.78	30.29
PK	5.5715G	105.86	Inf	-Inf	94.30	3	Horizontal	345	1.96	-	34.00	7.84	30.28
AV	5.6315G	94.64	Inf	-Inf	82.92	3	Horizontal	345	1.96	-	34.06	7.92	30.26
PK	5.752G	65.42	68.20	-2.78	53.31	3	Horizontal	345	1.96	-	34.20	8.13	30.22

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX


5570MHz_TX

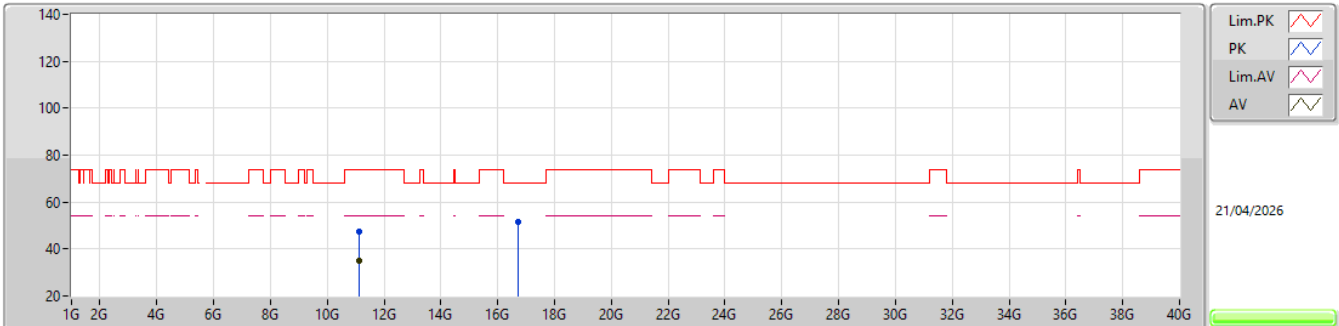EUT_Y_4TX
Setting 11.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14333G	47.36	74.00	-26.64	42.19	3	Vertical	6	1.92	-	38.93	12.36	46.12			
AV	11.13253G	35.13	54.00	-18.87	29.94	3	Vertical	6	1.92	-	38.97	12.35	46.13			
PK	16.70499G	51.31	68.20	-16.89	41.12	3	Vertical	237	2.07	-	39.92	14.97	44.70			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX

5570MHz_TX

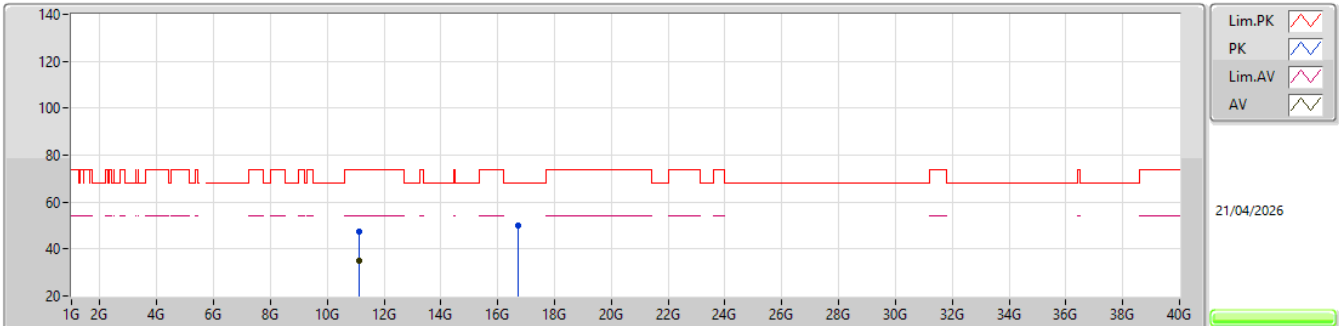EUT_Y_4TX
Setting 11.5
02-R-P-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.12758G	47.56	74.00	-26.44	42.36	3	Horizontal	254	1.40	-	38.99	12.35	46.14			
AV	11.14441G	35.20	54.00	-18.80	30.04	3	Horizontal	254	1.40	-	38.92	12.36	46.12			
PK	16.70025G	50.23	68.20	-17.97	40.05	3	Horizontal	205	1.96	-	39.90	14.97	44.69			



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	1.77074G	48.36	54.00	-5.64	Horizontal

Radiated Emissions above 1GHz_Mode 1

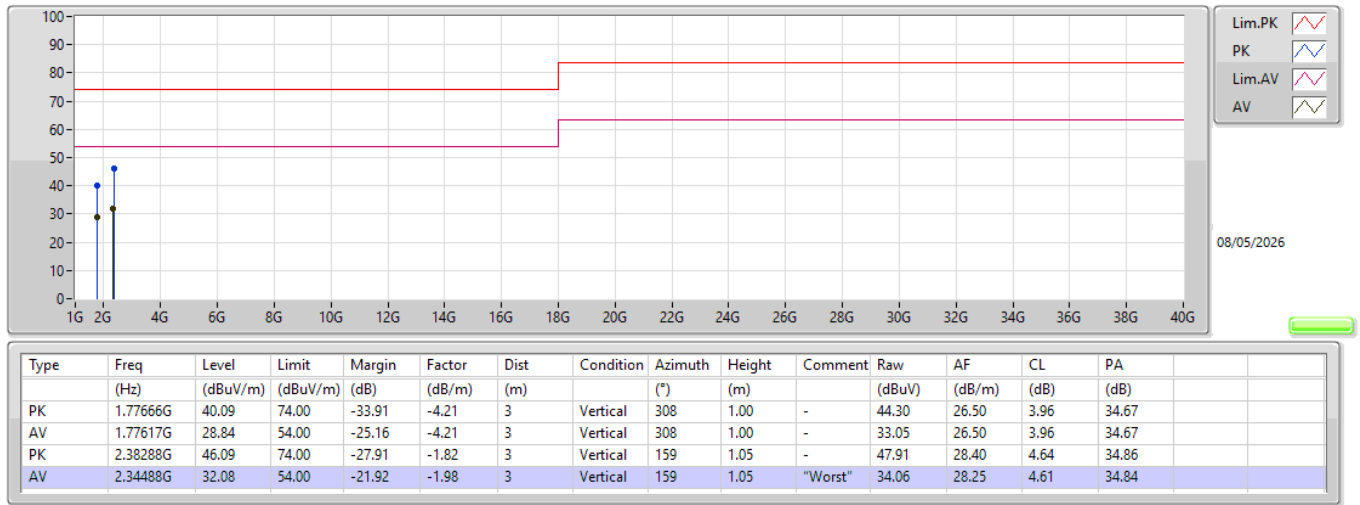

Radiated Emissions above 1GHz_Mode 1

