



04/03/2026

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

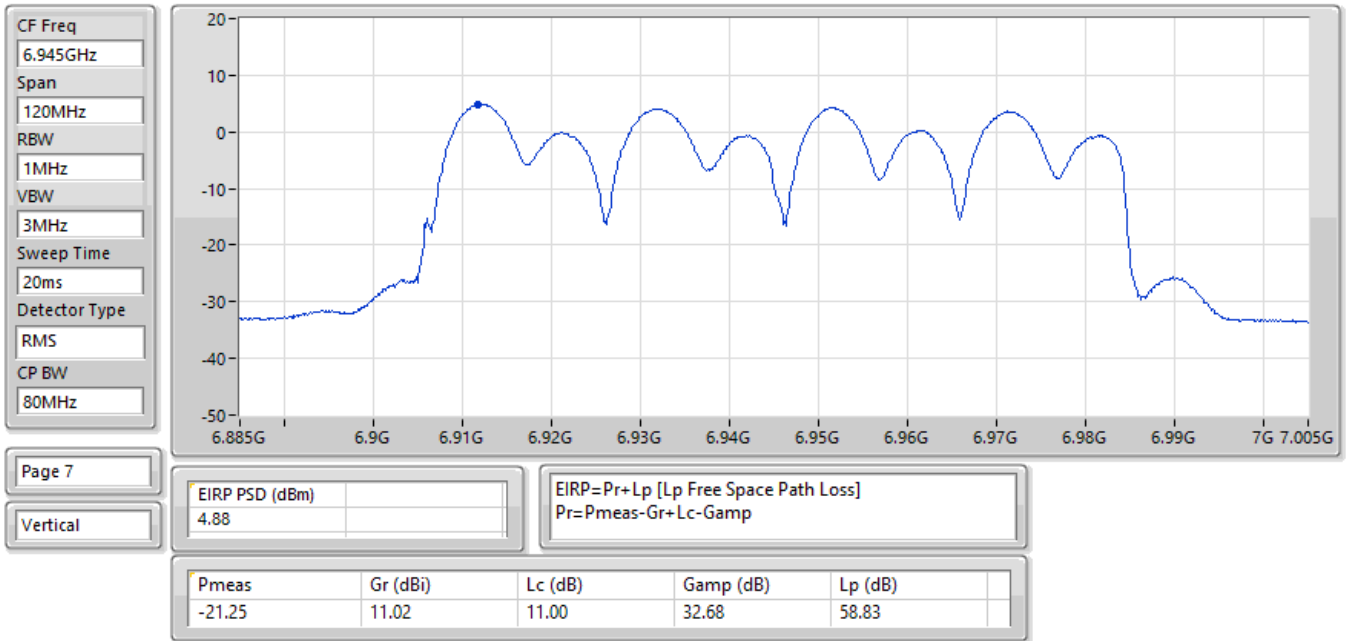


04/03/2026

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

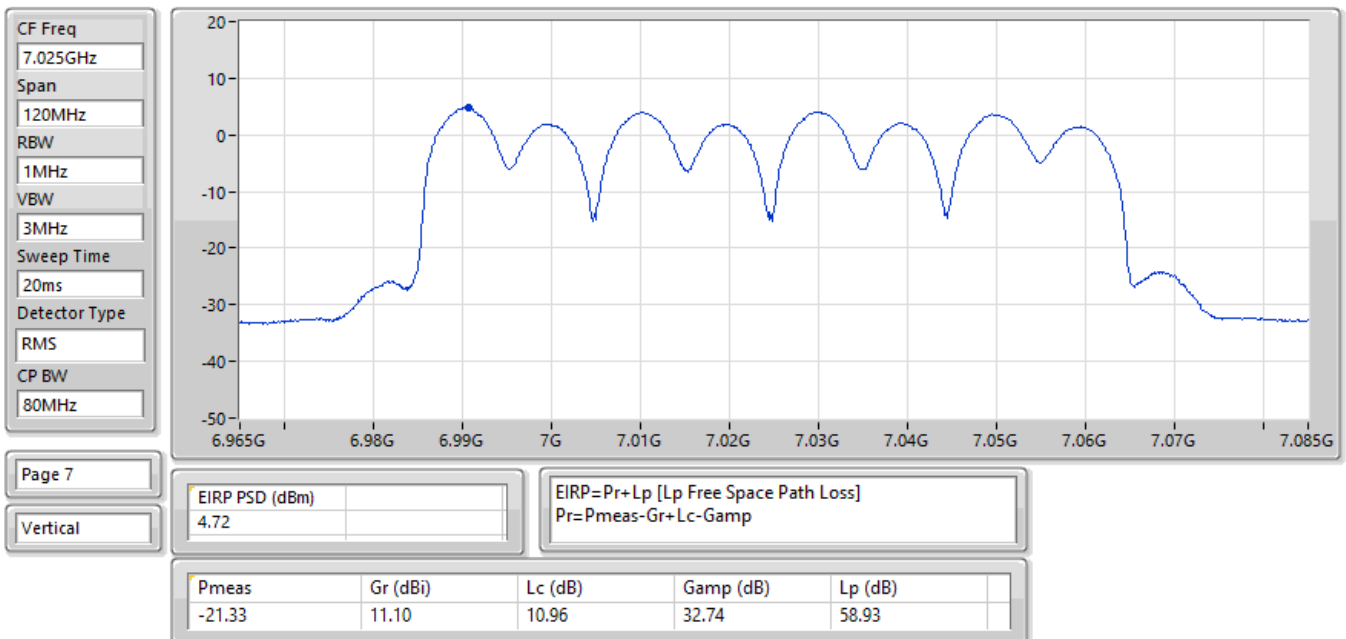


04/03/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

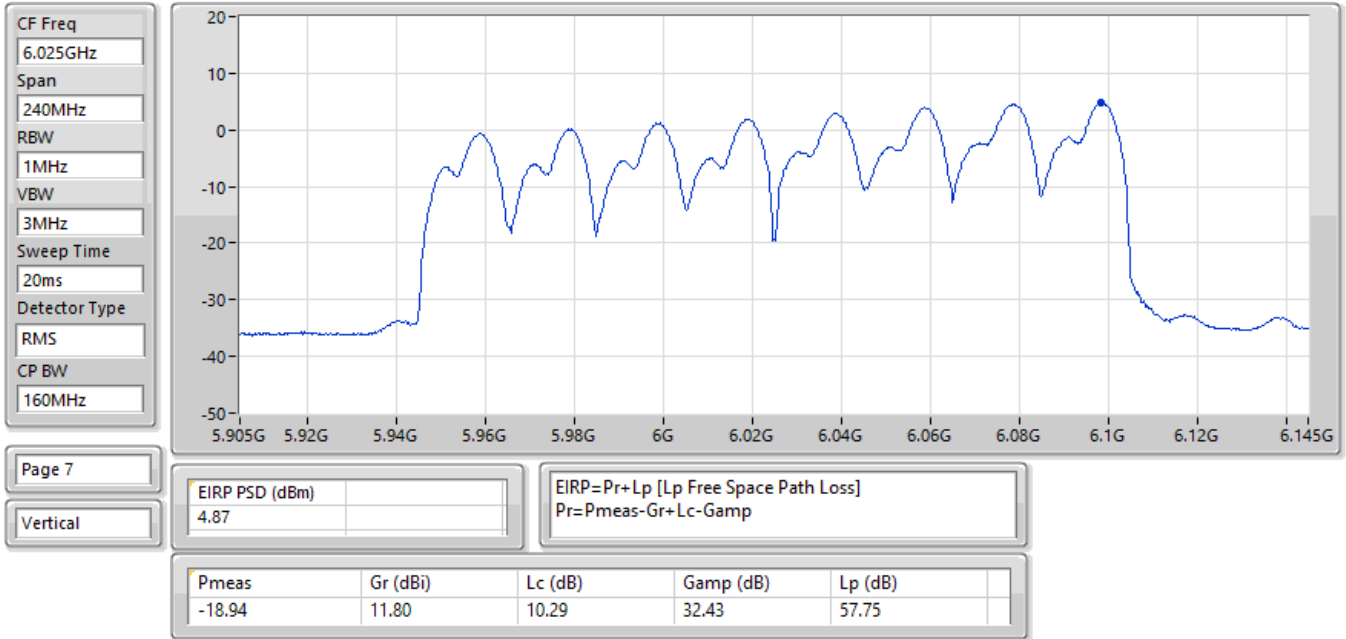


04/03/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

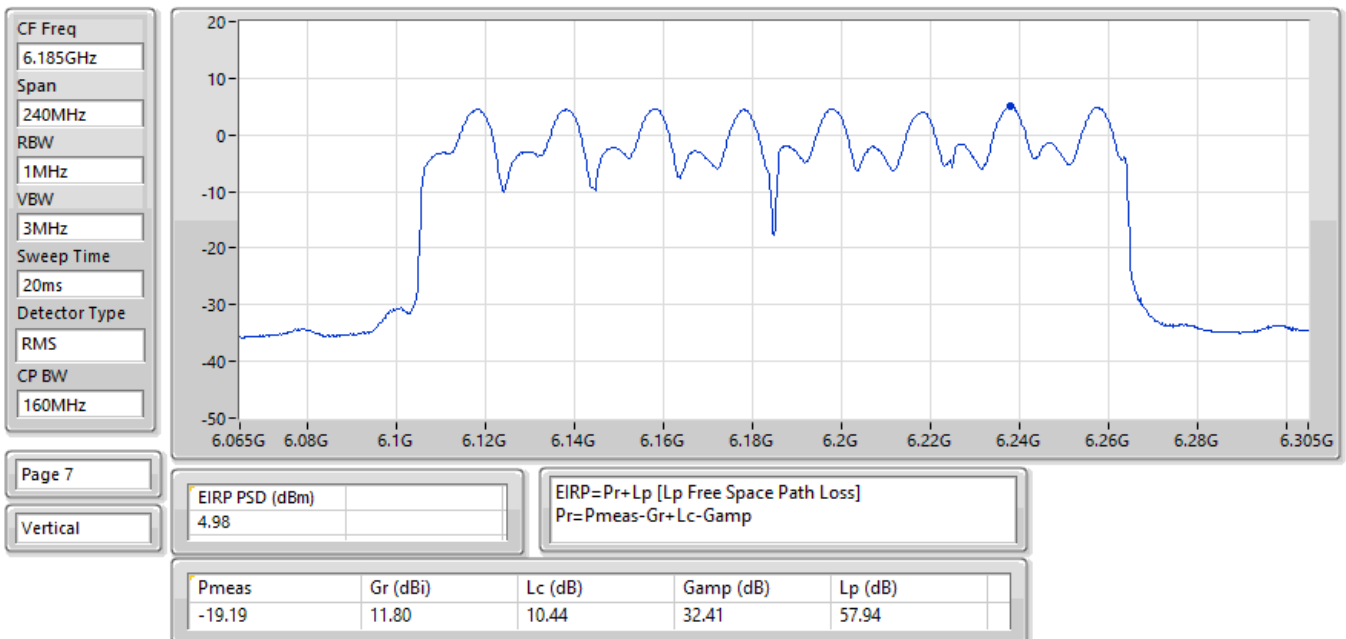


04/03/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

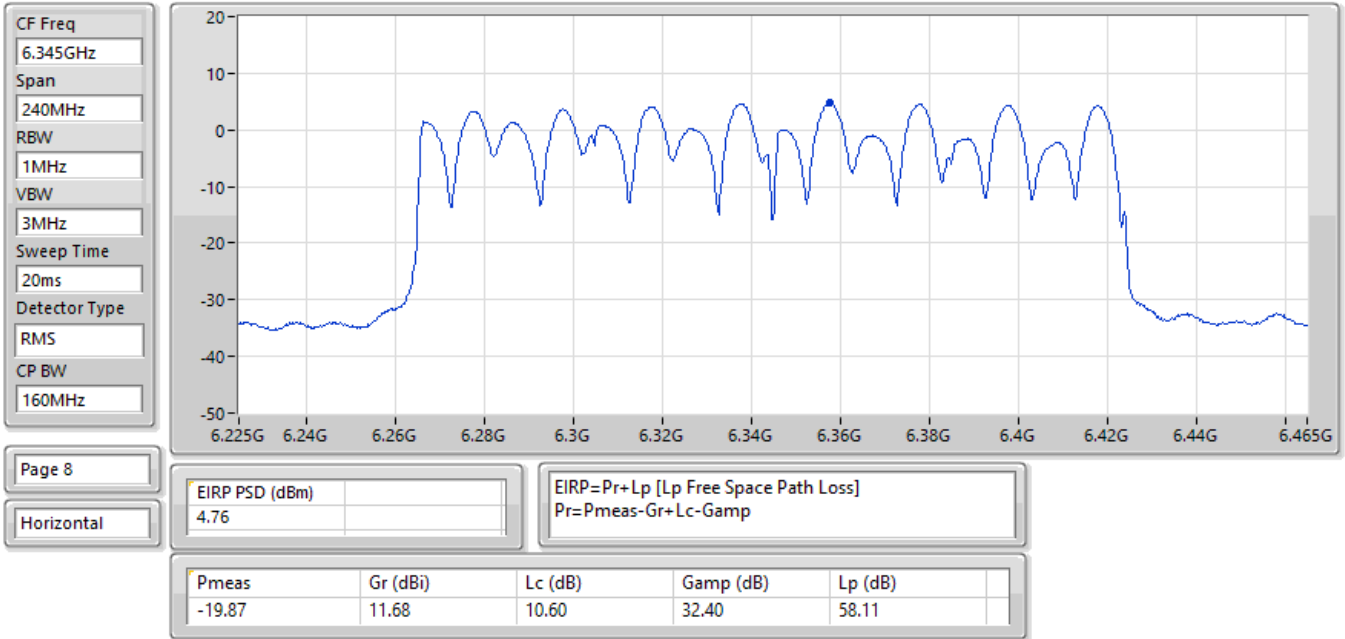


04/03/2026

EIRP PSD;Band:6.4G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

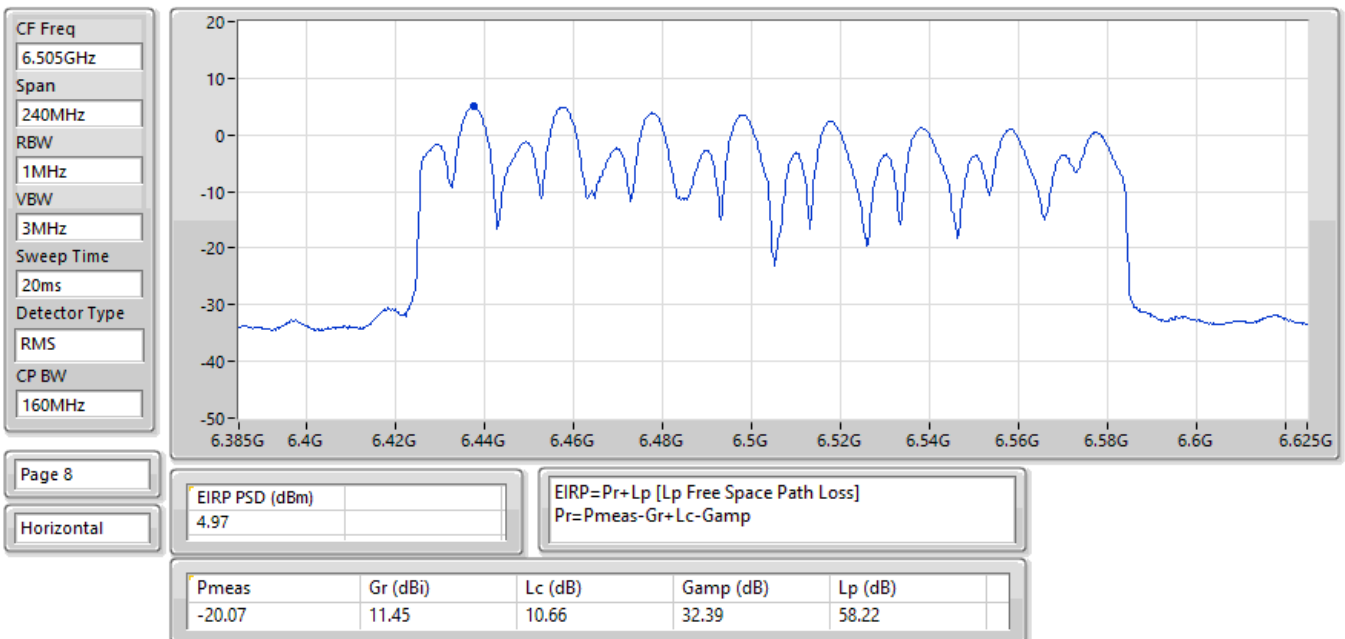


04/03/2026

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

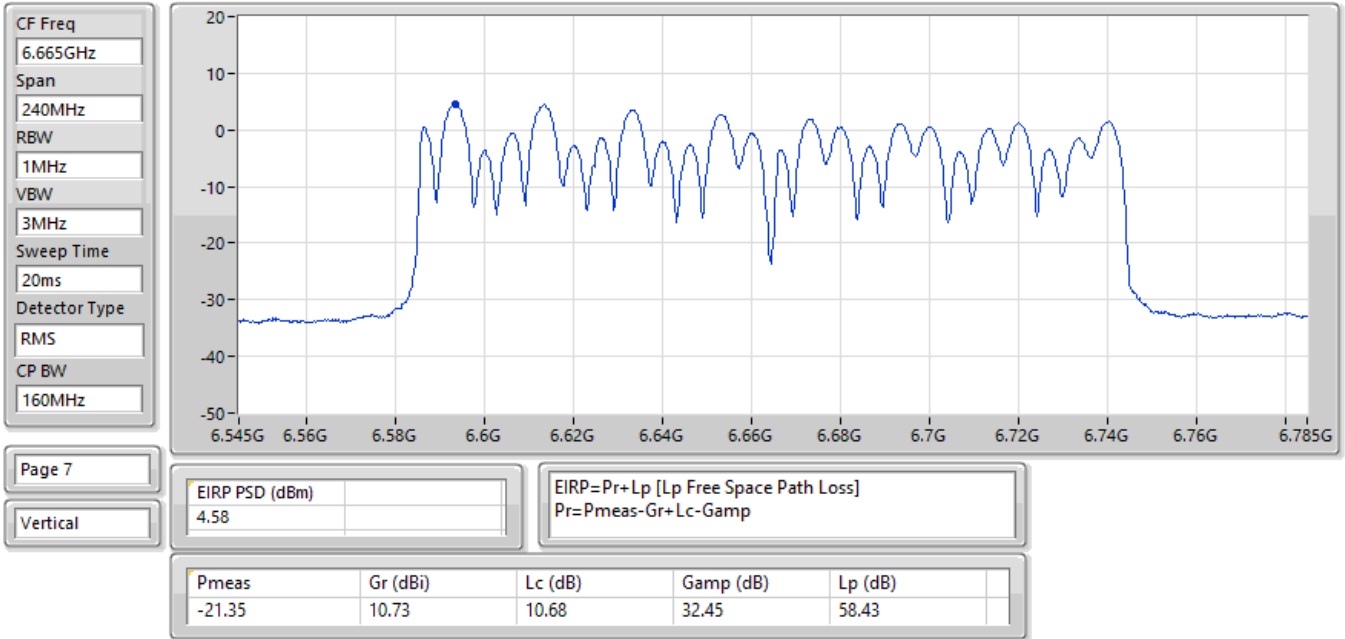


04/03/2026

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

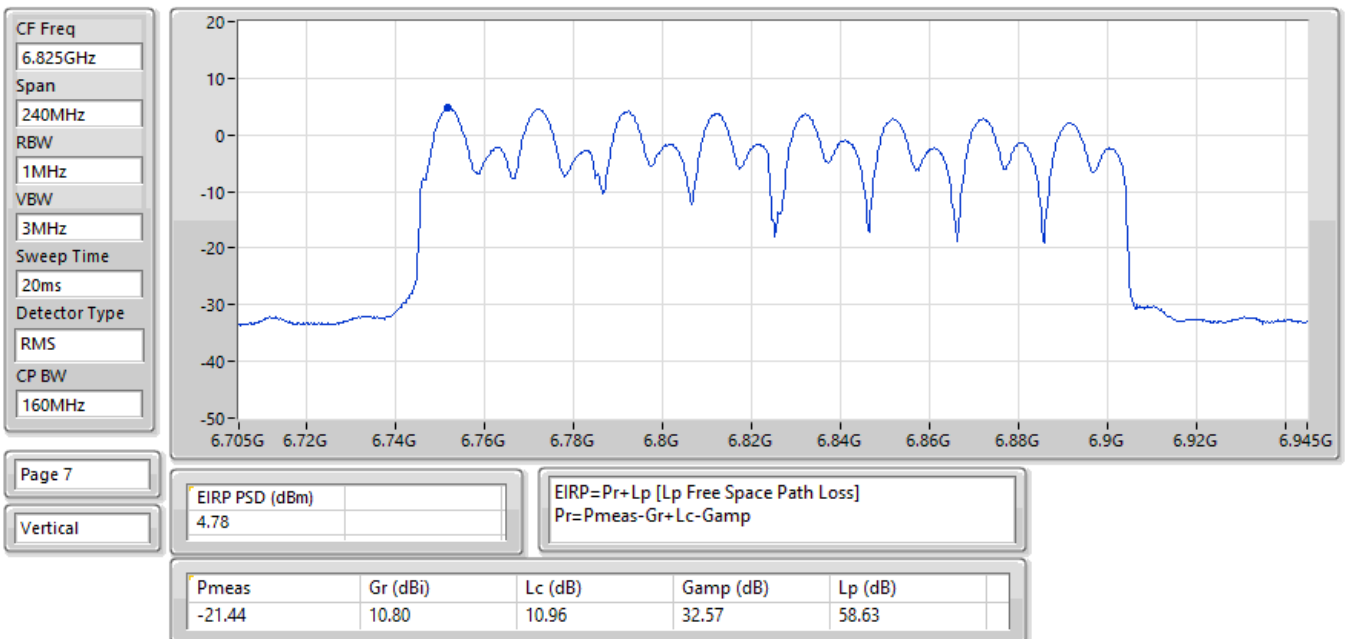


04/03/2026

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

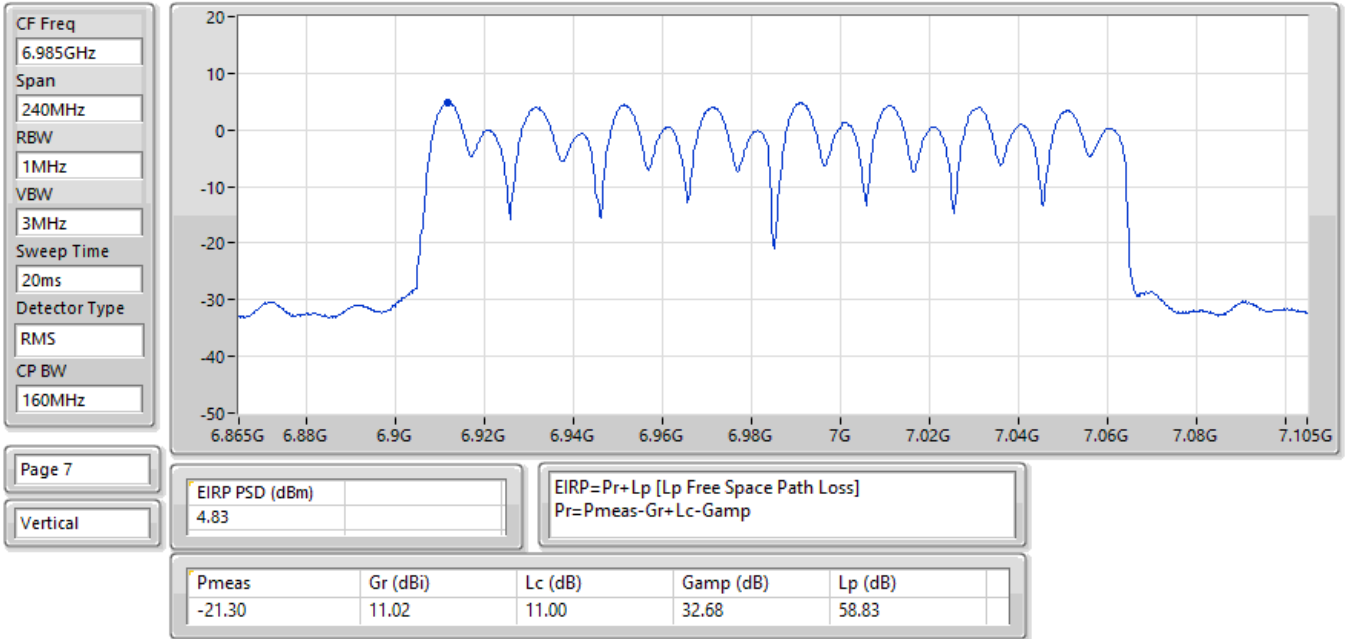


05/02/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

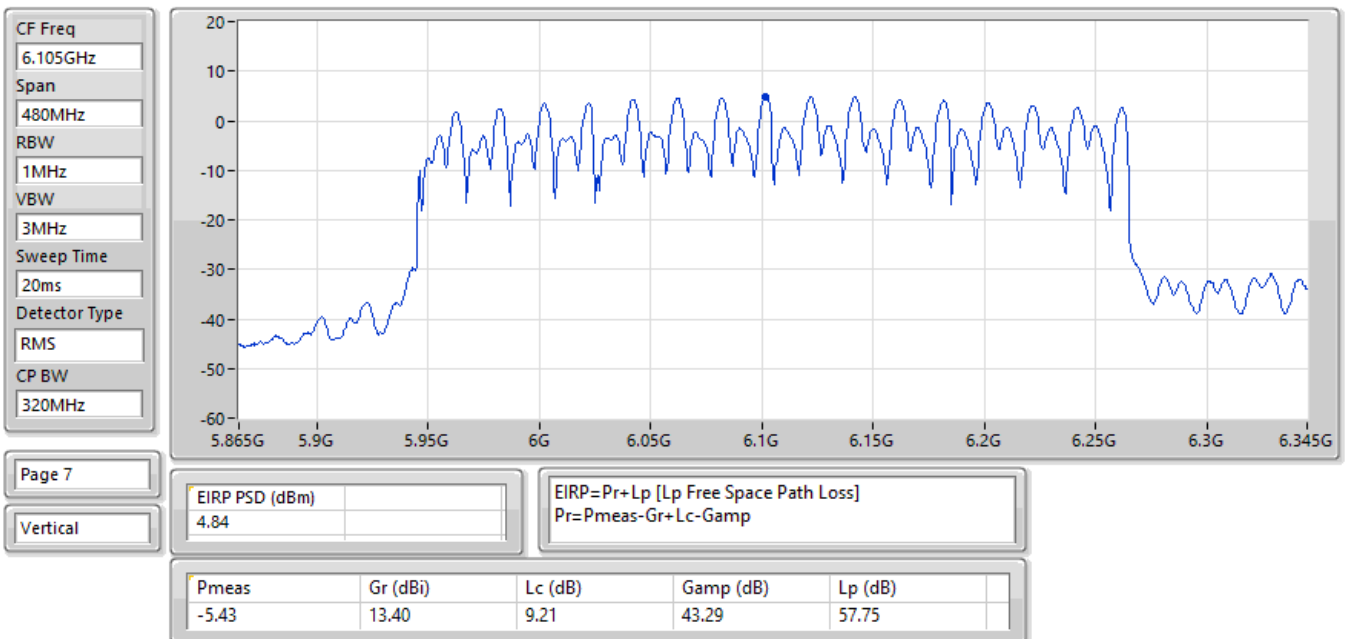


04/03/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

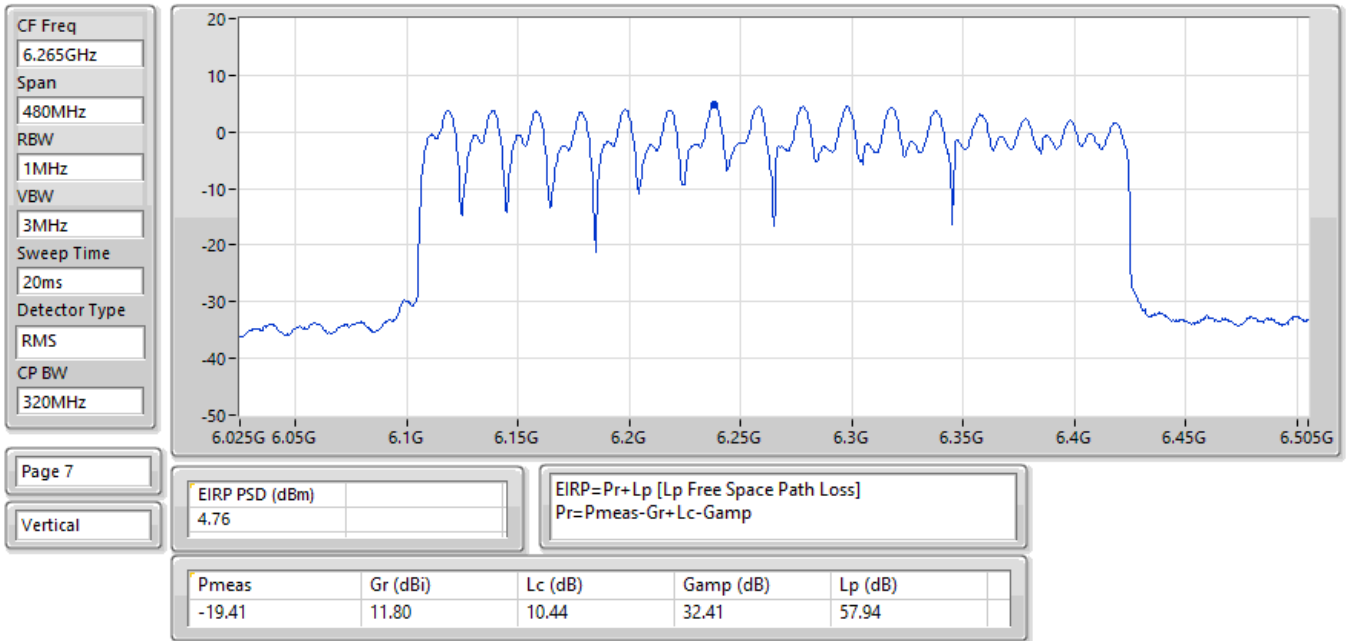


04/03/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6425MHz;TX

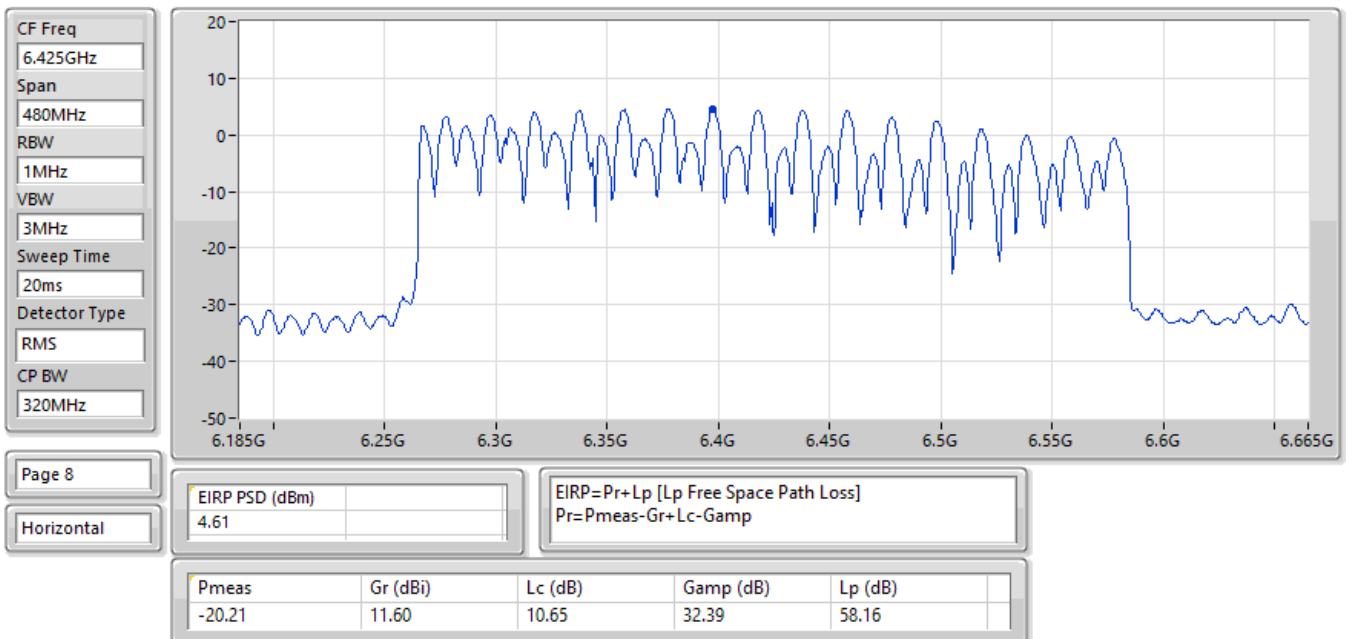


04/03/2026


EIRP PSD;Band:6.4G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

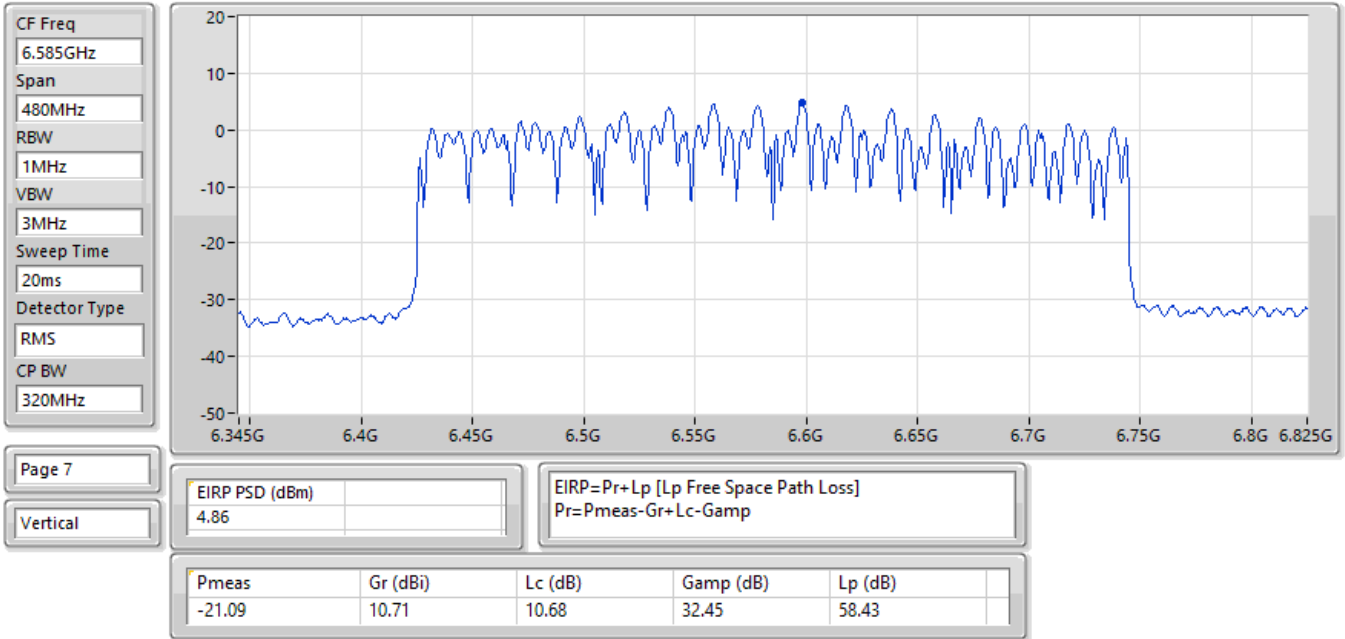

04/03/2026

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

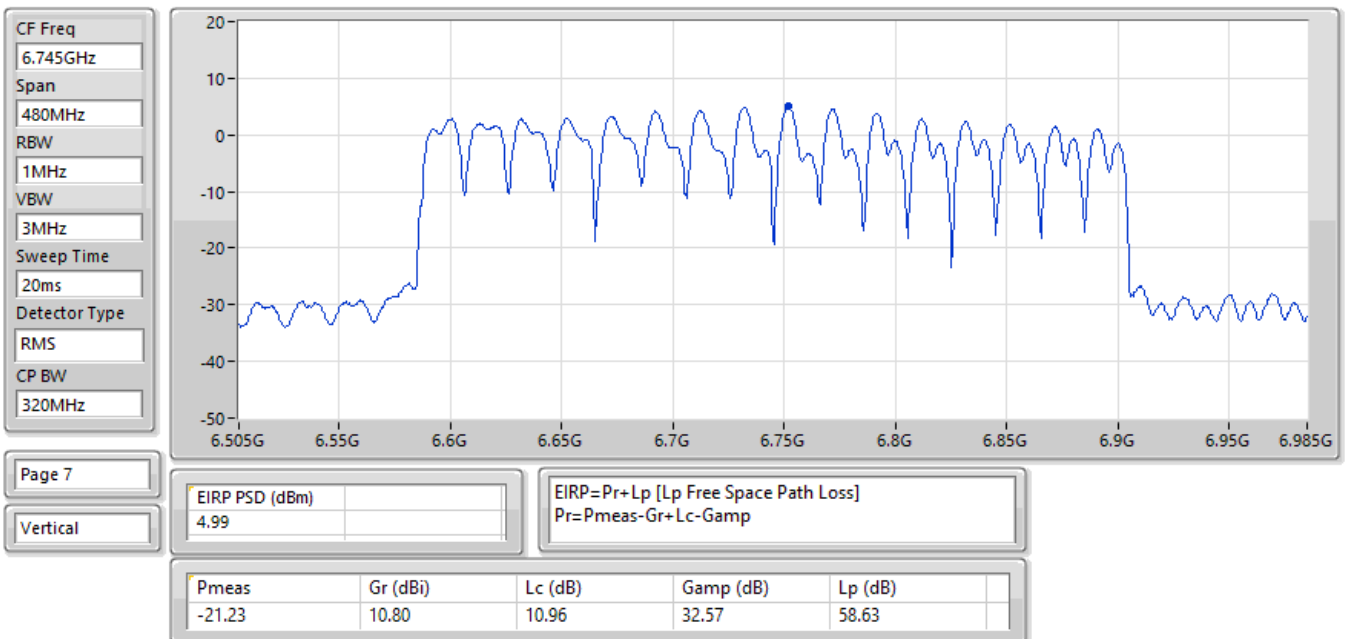

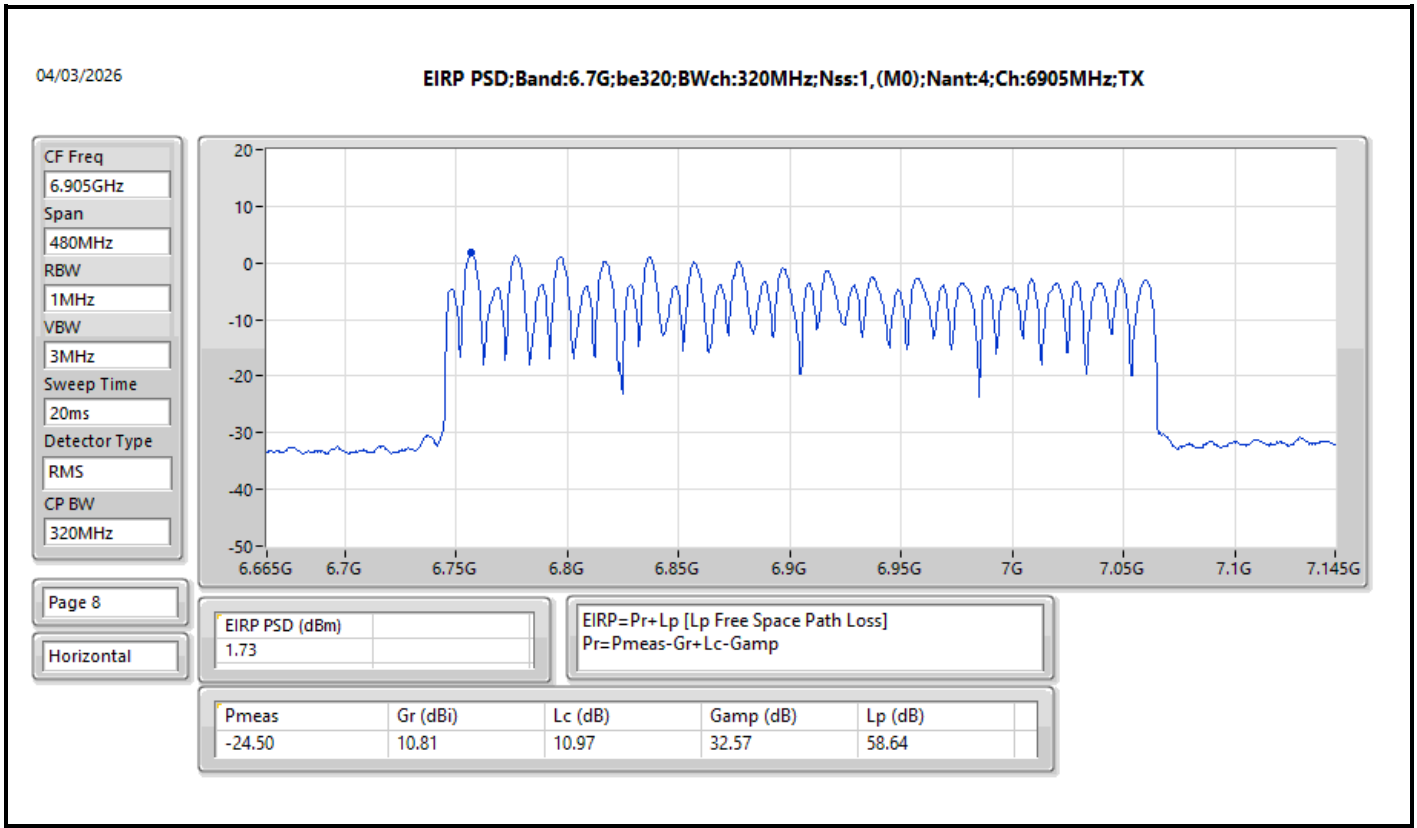

Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.95
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.63
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.96
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.40
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.68
6.425-6.525GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.85
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.49
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.72
802.11be EHT160-BF_Nss1,(MCS0)_4TX	3.60
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.41
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.93
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.91
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.93
802.11be EHT160-BF_Nss1,(MCS0)_4TX	2.60
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.64
6.875-7.125GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.66
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.78
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.73
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-3.25

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	4.95	5.00
6195MHz	Pass	4.92	5.00
6415MHz	Pass	4.91	5.00
6435MHz	Pass	4.85	5.00
6475MHz	Pass	4.18	5.00
6515MHz	Pass	4.82	5.00
6535MHz	Pass	4.35	5.00
6695MHz	Pass	4.51	5.00
6855MHz	Pass	4.93	5.00
6875MHz	Pass	4.64	5.00
6995MHz	Pass	4.23	5.00
7095MHz	Pass	4.66	5.00
7115MHz	Pass	-2.87	5.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	4.54	5.00
6205MHz	Pass	4.63	5.00
6405MHz	Pass	4.39	5.00
6445MHz	Pass	4.26	5.00
6485MHz	Pass	4.49	5.00
6525MHz	Pass	4.19	5.00
6565MHz	Pass	4.22	5.00
6685MHz	Pass	4.91	5.00
6845MHz	Pass	4.57	5.00
6885MHz	Pass	4.74	5.00
7005MHz	Pass	4.78	5.00
7085MHz	Pass	4.63	5.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	4.54	5.00
6225MHz	Pass	4.30	5.00
6385MHz	Pass	4.96	5.00
6465MHz	Pass	4.72	5.00
6545MHz	Pass	4.42	5.00
6625MHz	Pass	4.44	5.00
6705MHz	Pass	4.89	5.00
6785MHz	Pass	4.93	5.00
6865MHz	Pass	4.24	5.00
6945MHz	Pass	4.73	5.00
7025MHz	Pass	4.14	5.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	2.16	5.00
6185MHz	Pass	2.20	5.00
6345MHz	Pass	4.40	5.00
6505MHz	Pass	3.60	5.00
6665MHz	Pass	2.60	5.00
6825MHz	Pass	-2.24	5.00
6985MHz	Pass	-3.25	5.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	2.18	5.00
6265MHz	Pass	3.13	5.00
6425MHz	Pass	4.68	5.00
6585MHz	Pass	4.41	5.00
6745MHz	Pass	4.64	5.00
6905MHz	Pass	-1.50	5.00




DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

08/04/2026

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

CF Freq
5.955GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

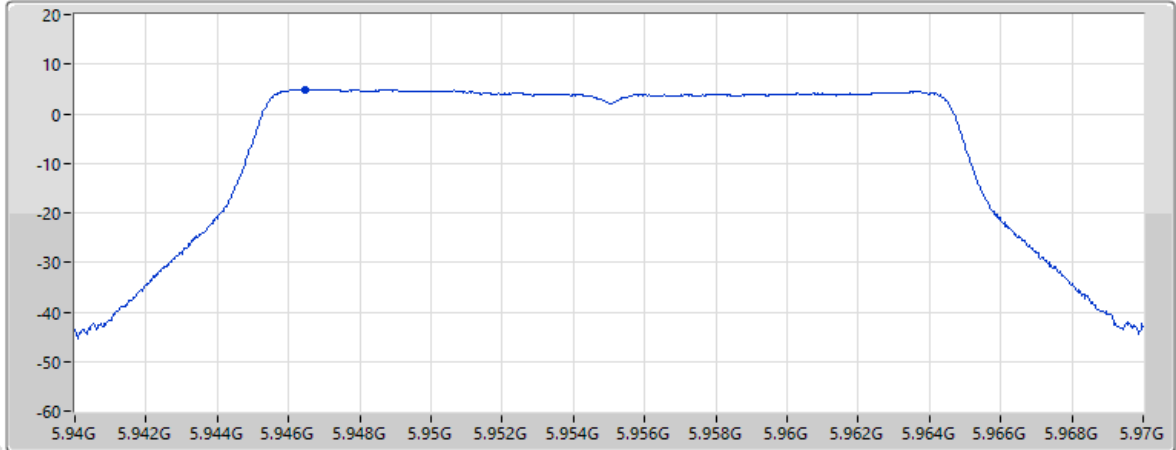


Page 7
Vertical

EIRP PSD (dBm)	4.95	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-4.98	13.30	9.08	43.38	57.53

22/04/2026

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

CF Freq
6.195GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

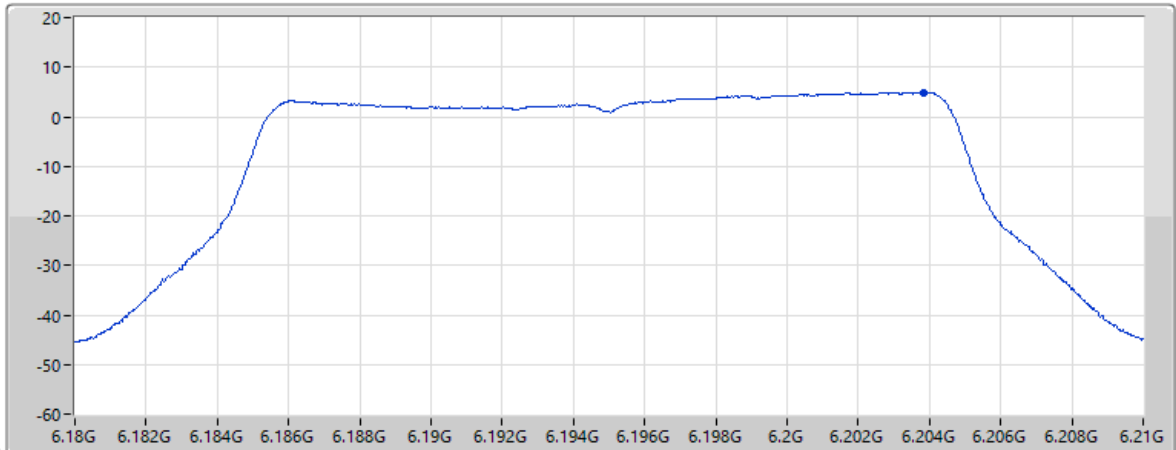

Page 8
Horizontal

EIRP PSD (dBm)	4.92	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-5.74	13.28	9.27	43.23	57.90

22/04/2026

EIRP PSD:Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

CF Freq
6.415GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

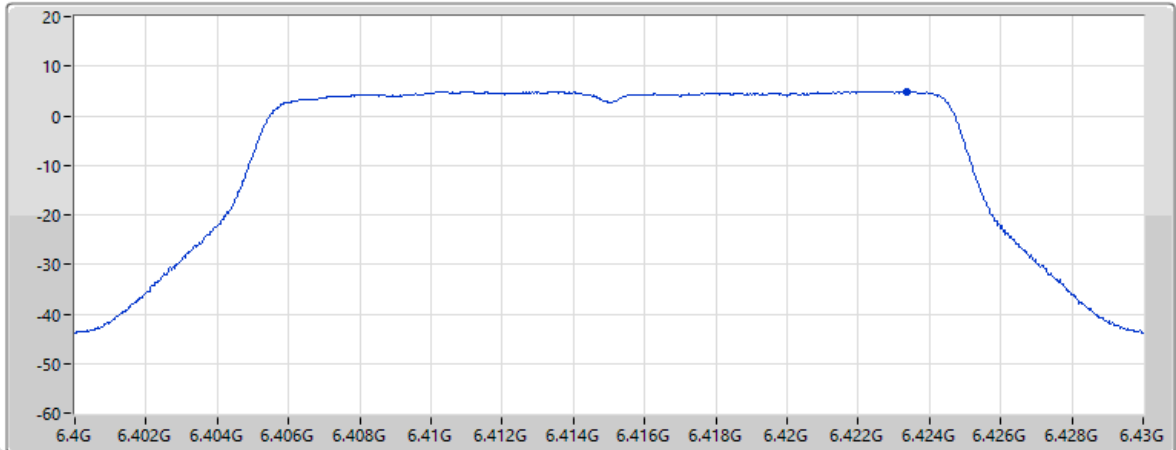

Page 7

Vertical

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.91		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-6.96	12.75	9.53	43.11	58.20

22/04/2026

EIRP PSD:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6435MHz;TX

CF Freq
6.435GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

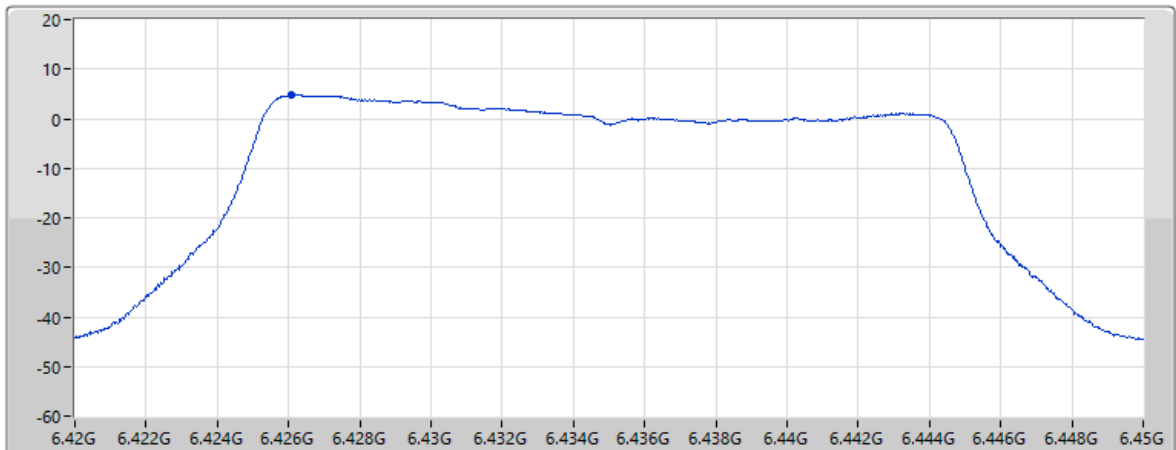

Page 8


Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.85		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-7.02	12.75	9.53	43.11	58.20

22/04/2026

EIRP PSD:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

CF Freq
6.475GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

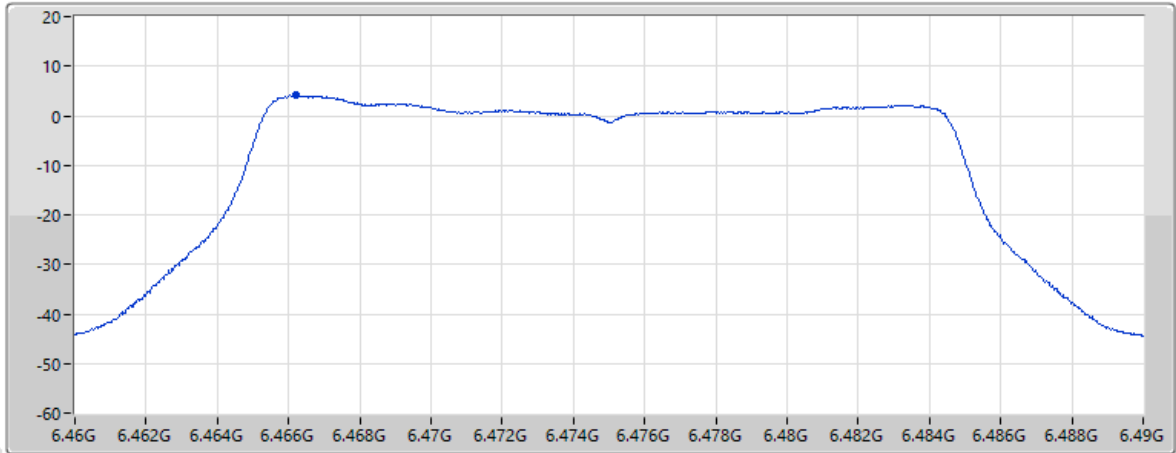


Page 8
Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.18				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-7.92	12.64	9.57	43.09	58.26

22/04/2026

EIRP PSD:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

CF Freq
6.515GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

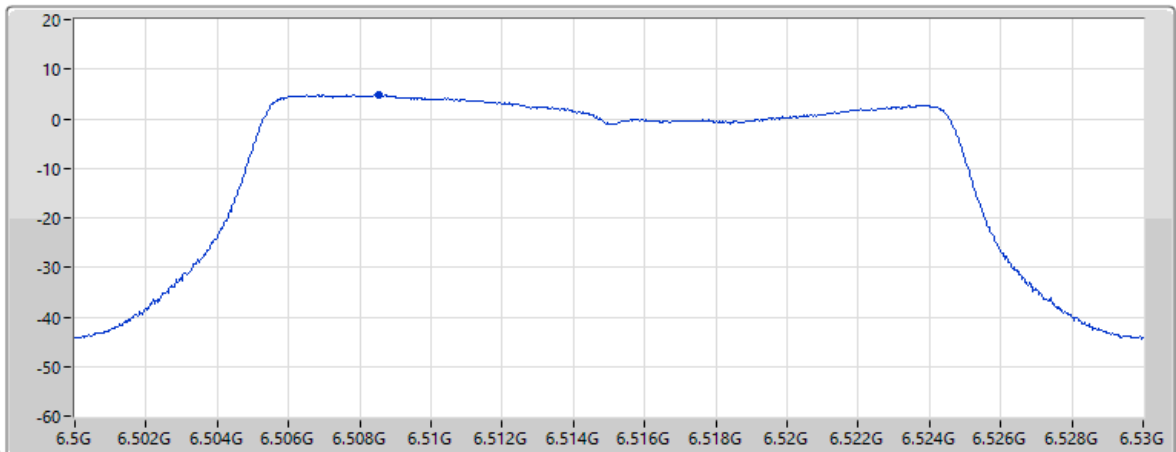


Page 8
Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.82				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-7.54	12.48	9.60	43.07	58.31


22/04/2026

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

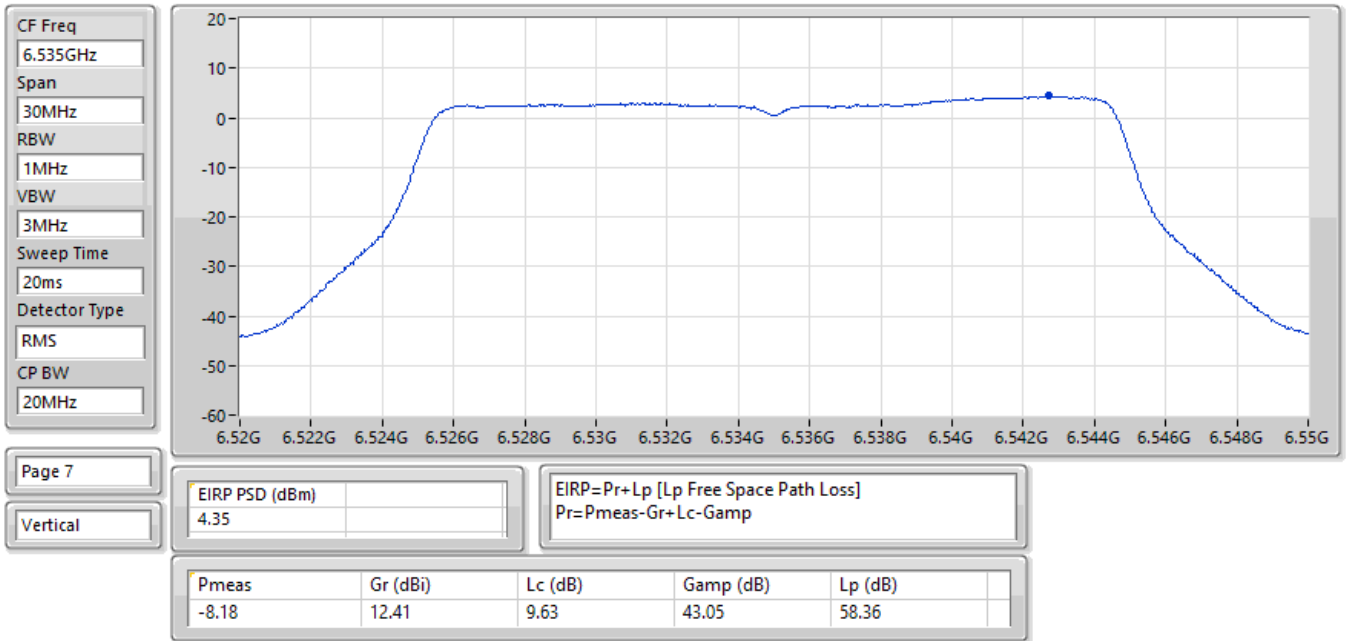

22/04/2026


EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

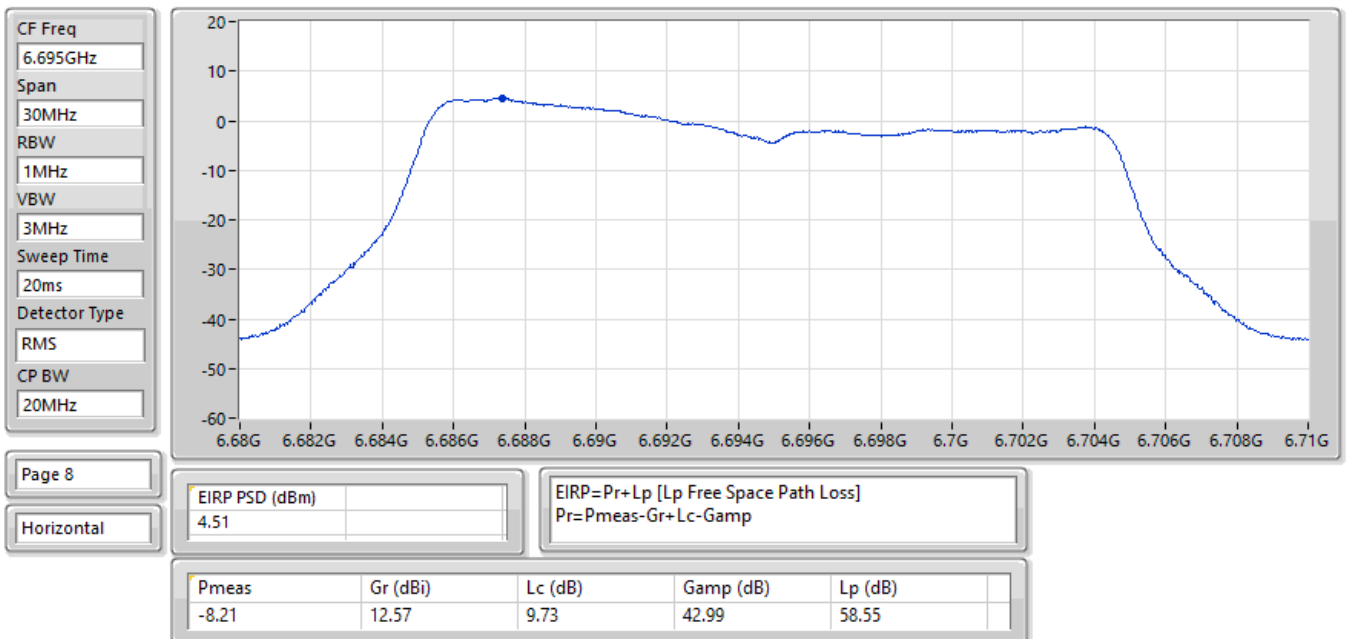

22/04/2026

EIRP PSD:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6855MHz;TX

CF Freq
6.855GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

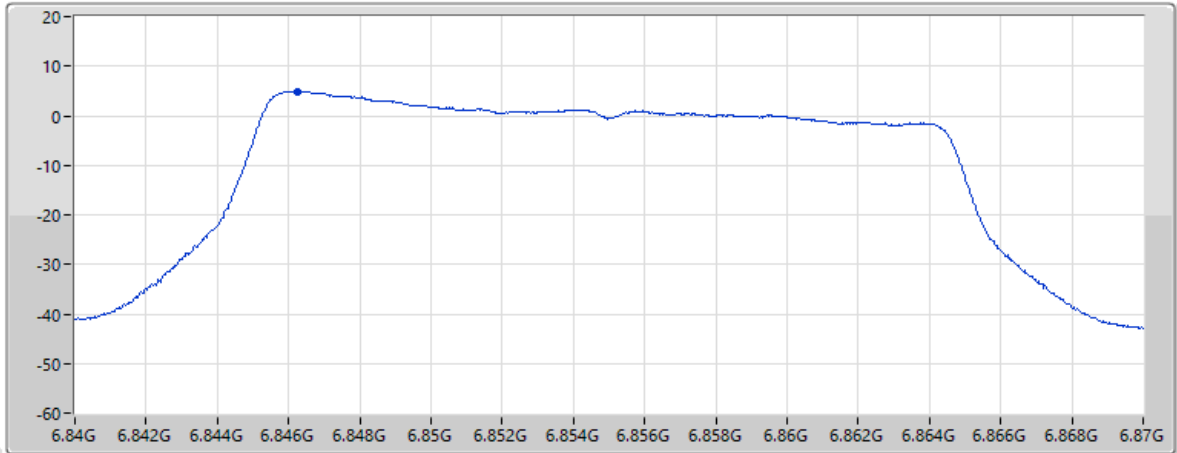


Page 7
Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.93				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-8.05	12.70	9.85	42.92	58.75

22/04/2026

EIRP PSD:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

CF Freq
6.875GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

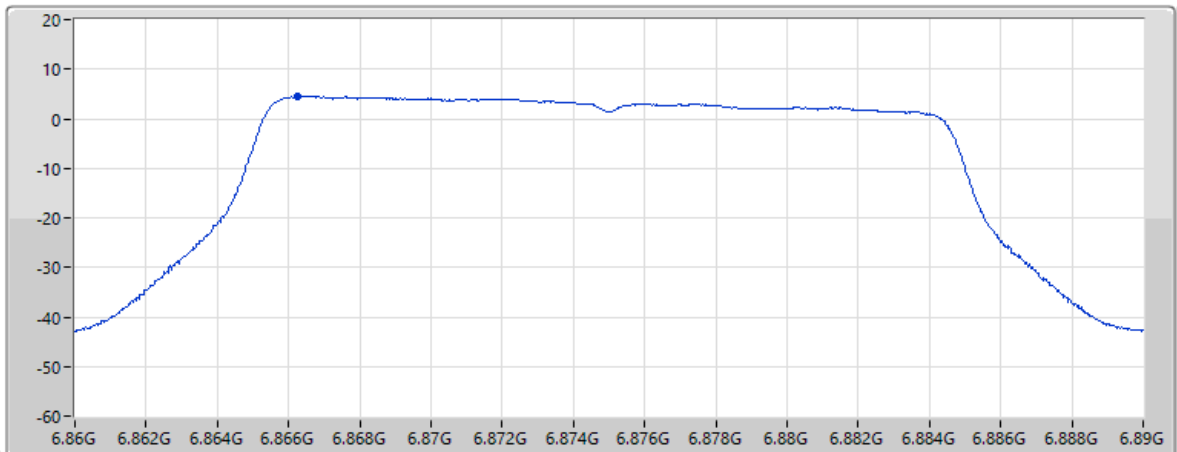


Page 8
Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.64				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-8.53	12.57	9.87	42.91	58.78


22/04/2026

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

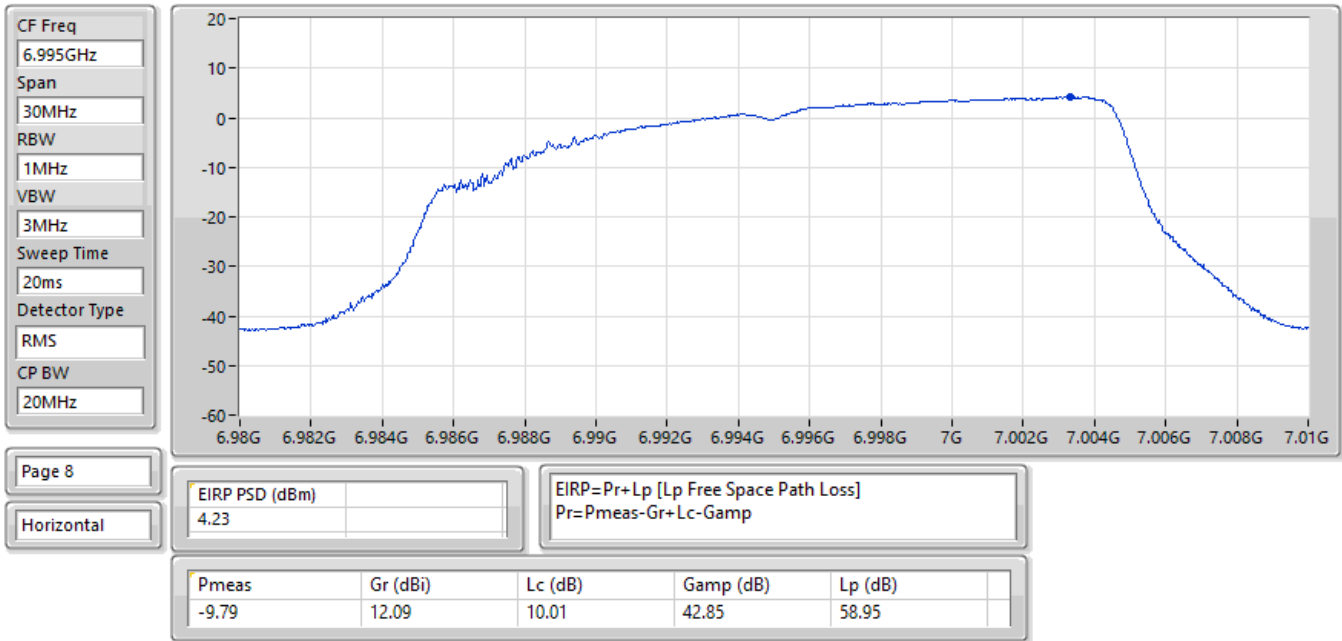


22/04/2026

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

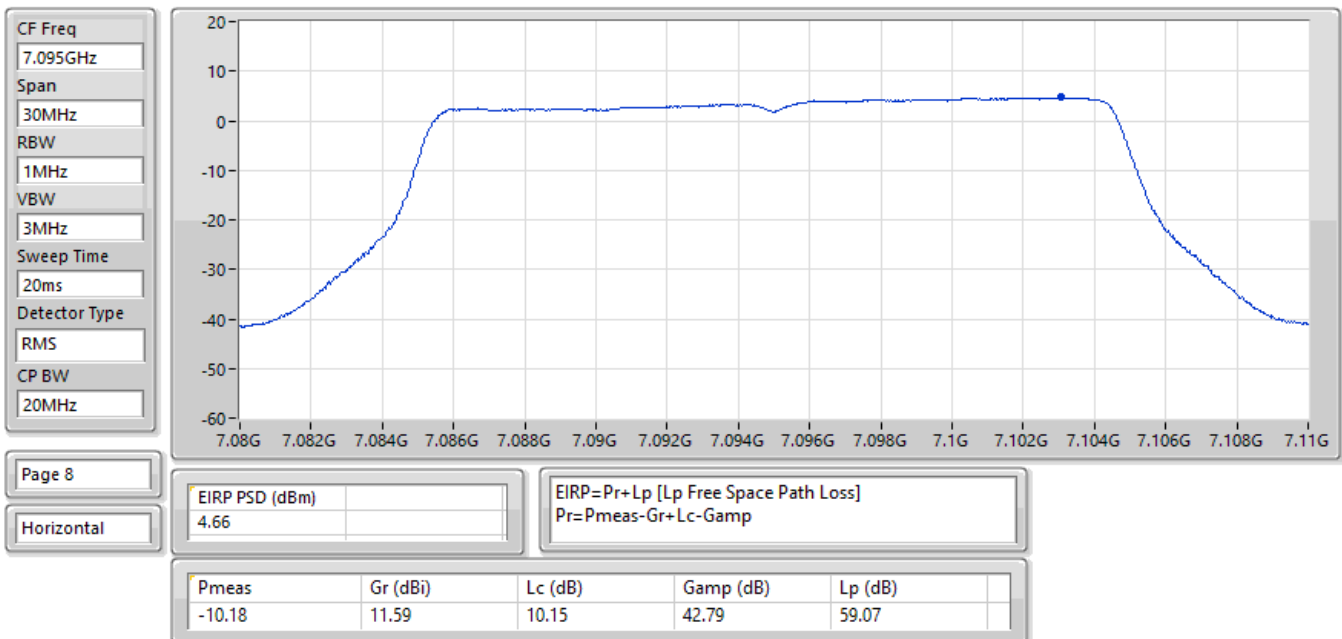


22/04/2026

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7115MHz;TX

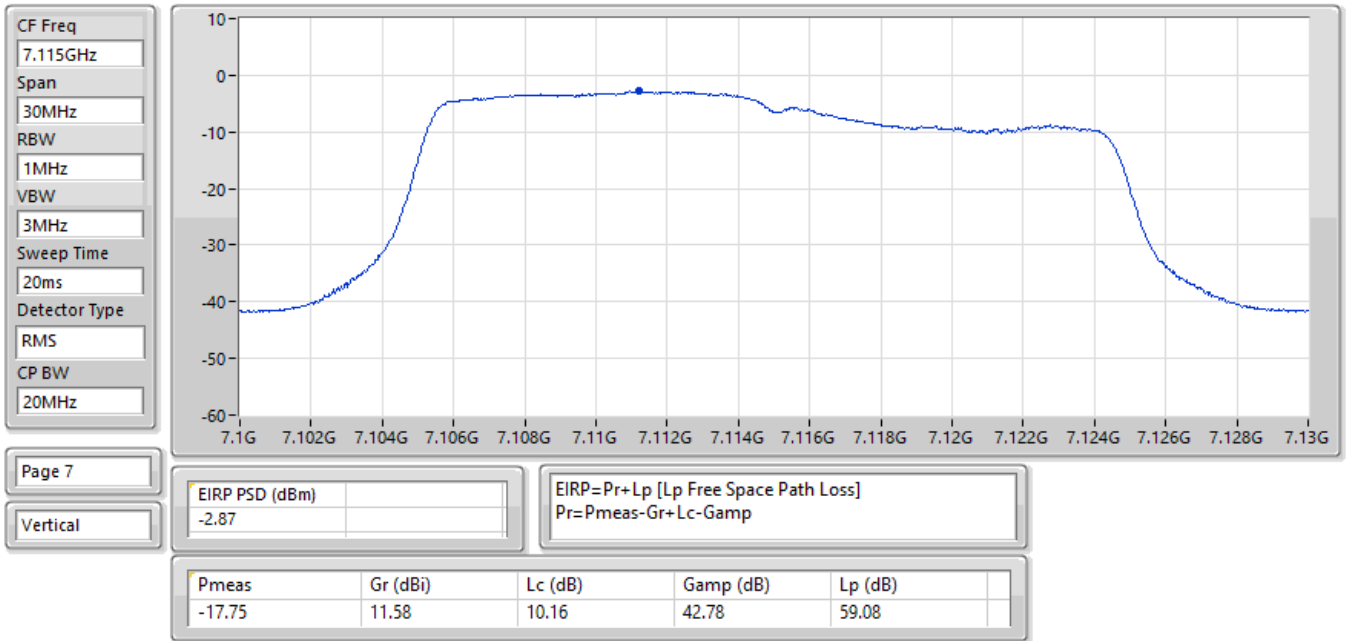


20/04/2026

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

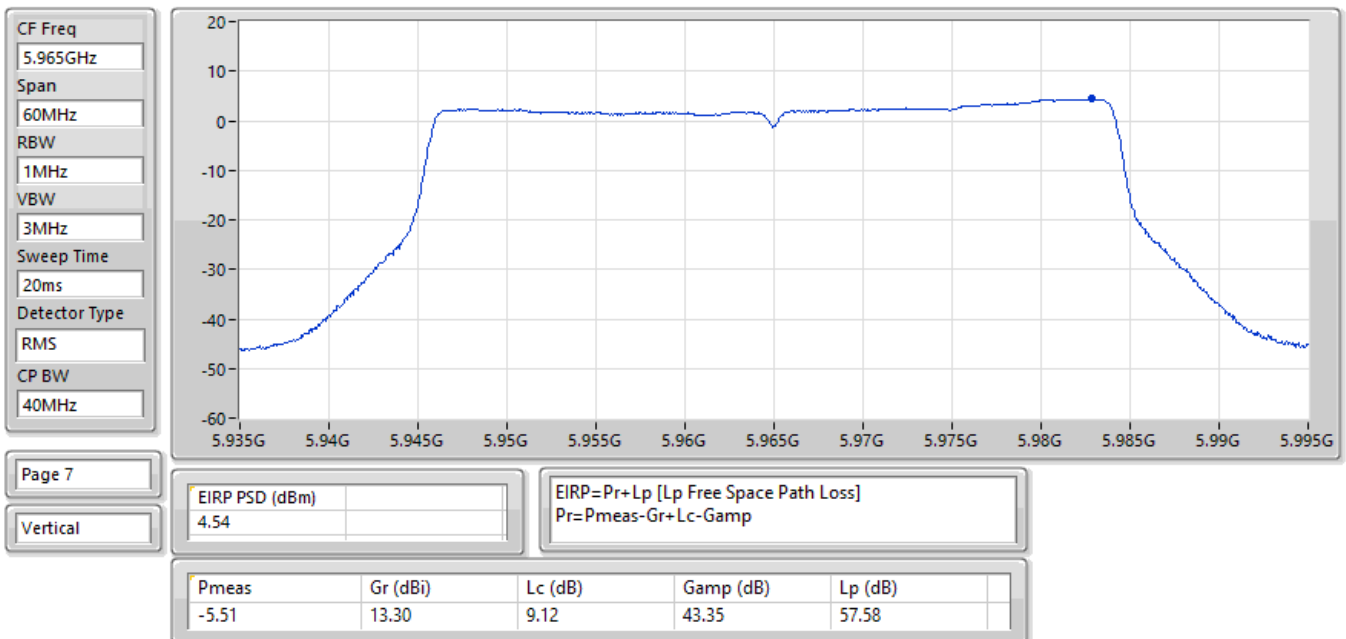


23/04/2026

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

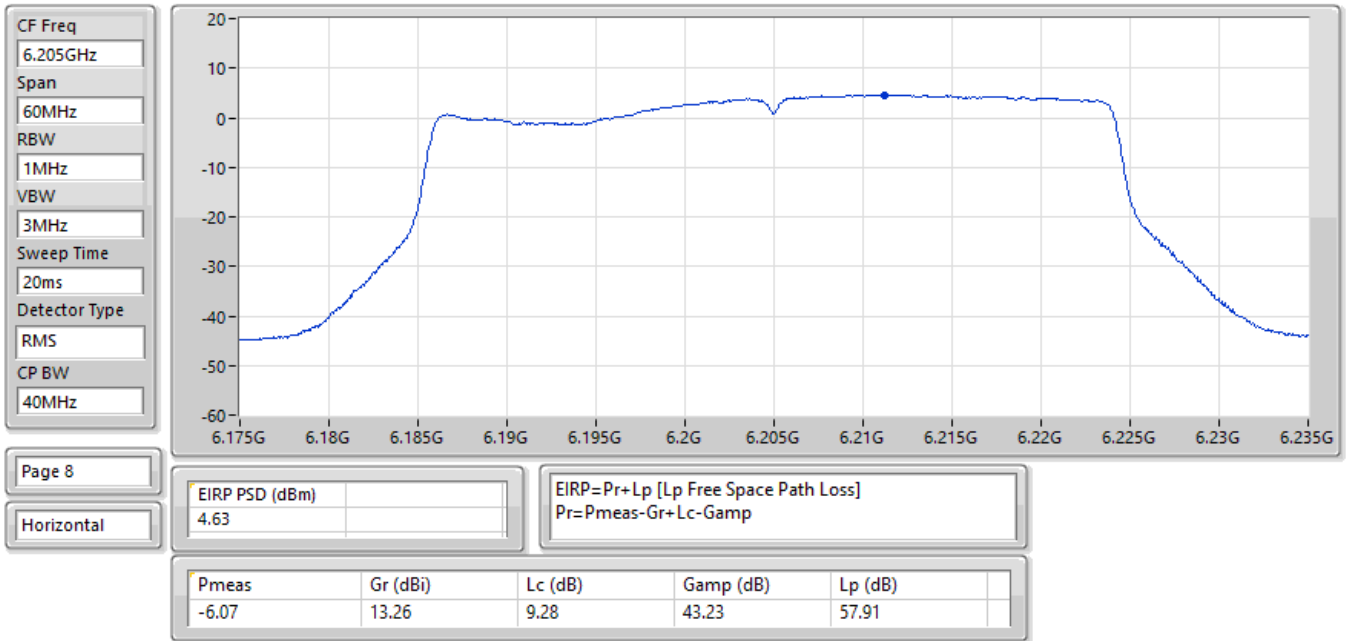


23/04/2026

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

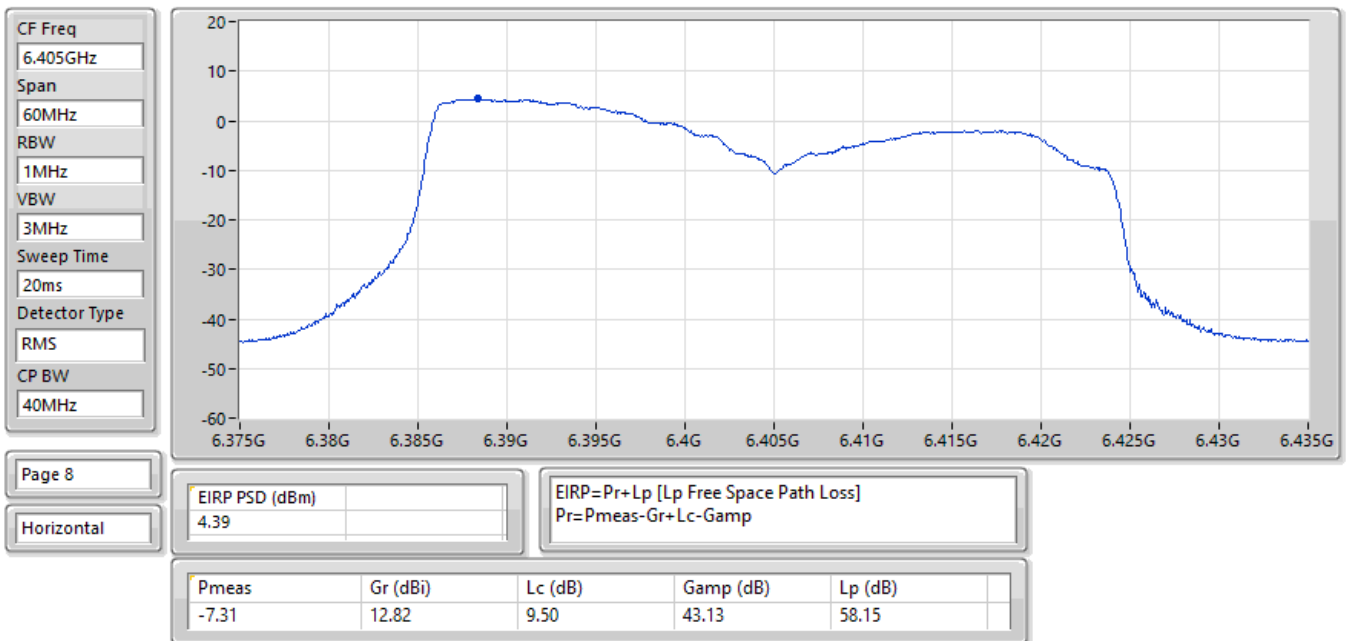


23/04/2026

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

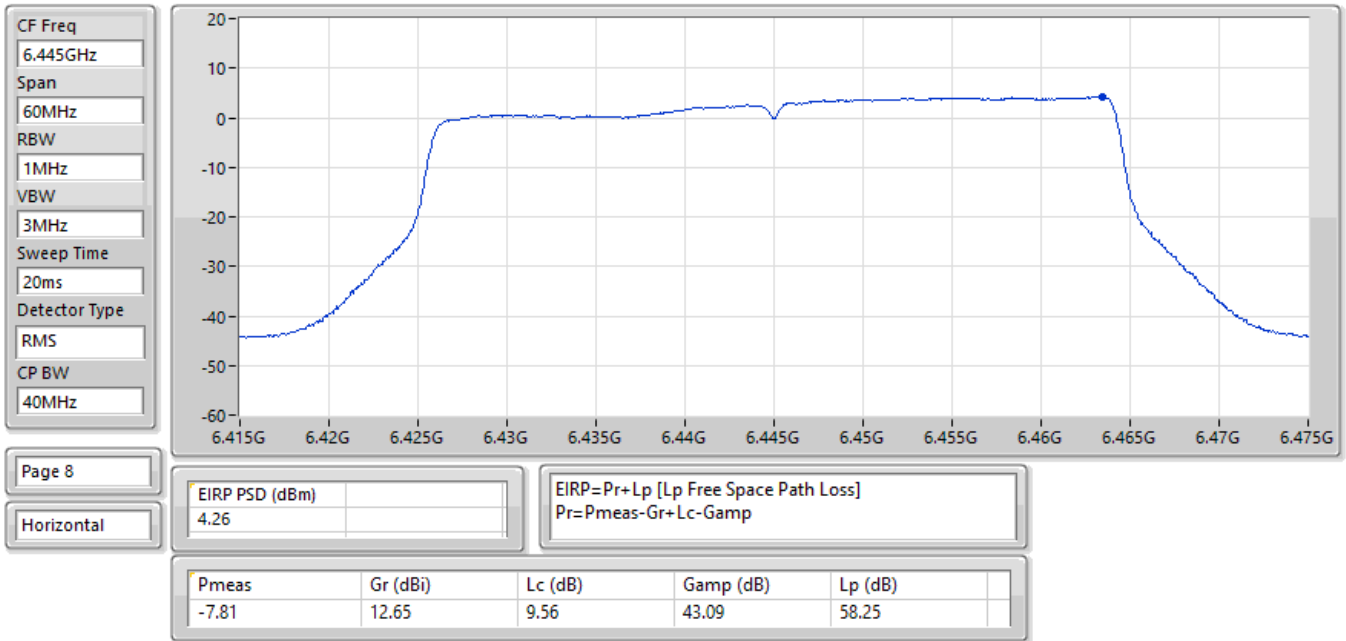


23/04/2026

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

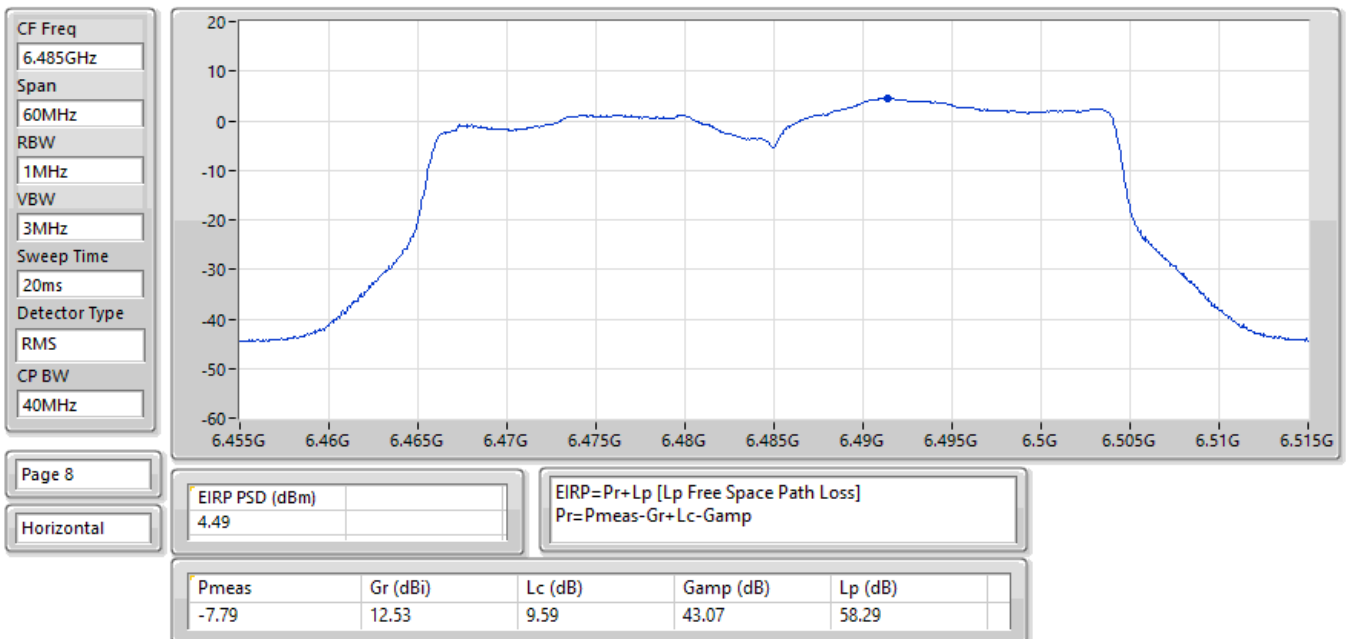


23/04/2026

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

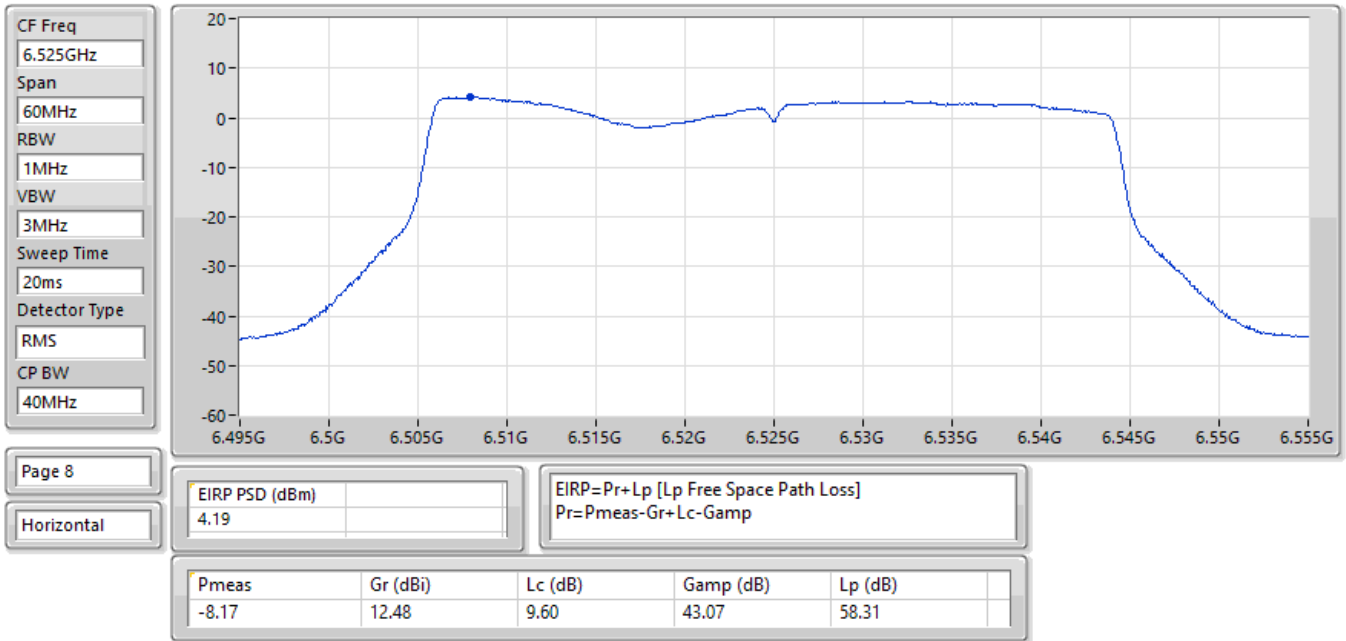


23/04/2026

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

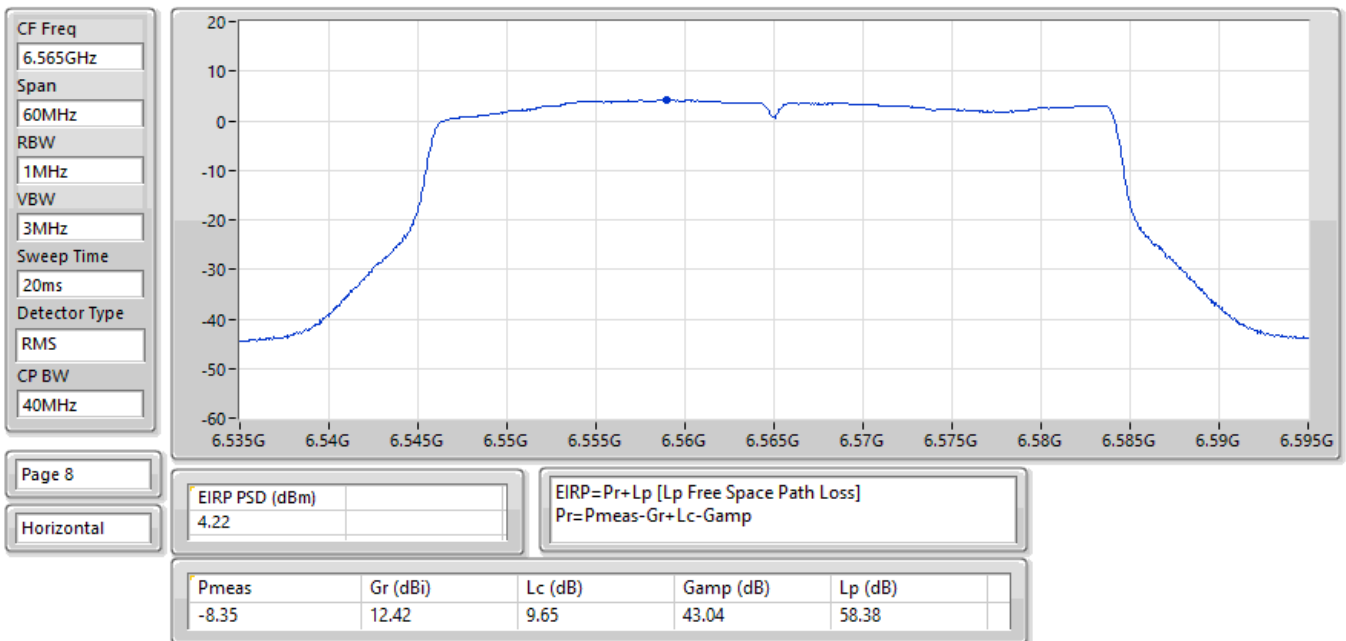


23/04/2026

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

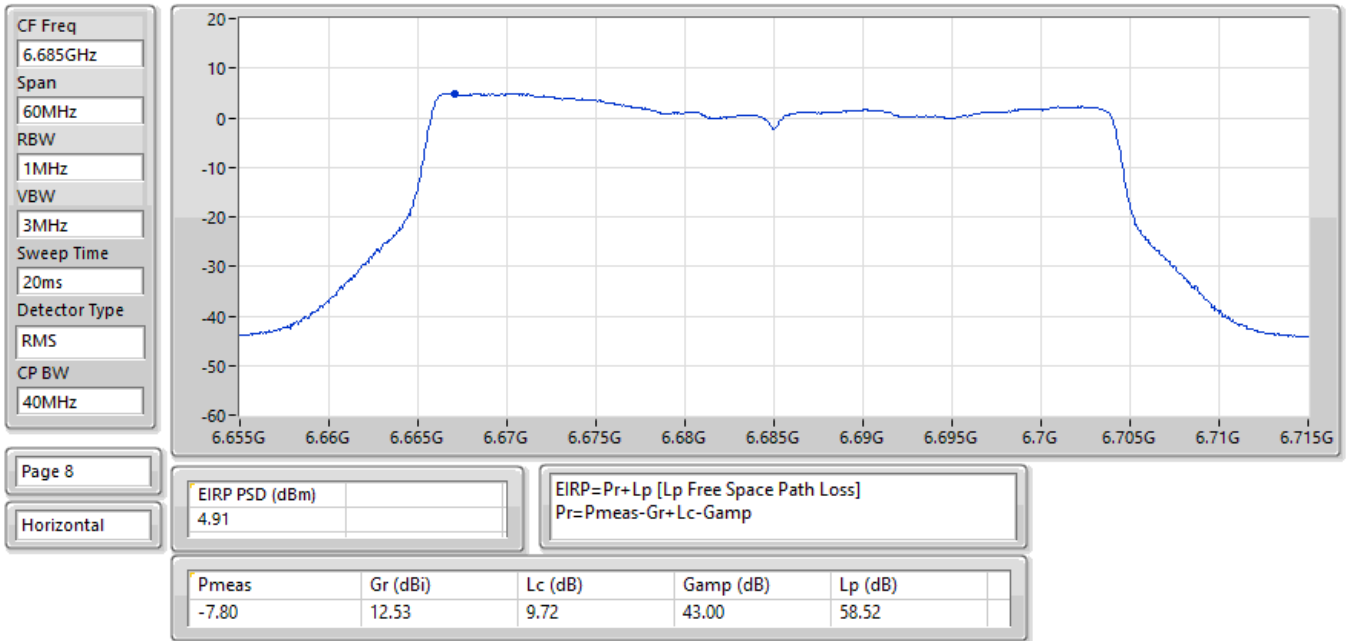


23/04/2026

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

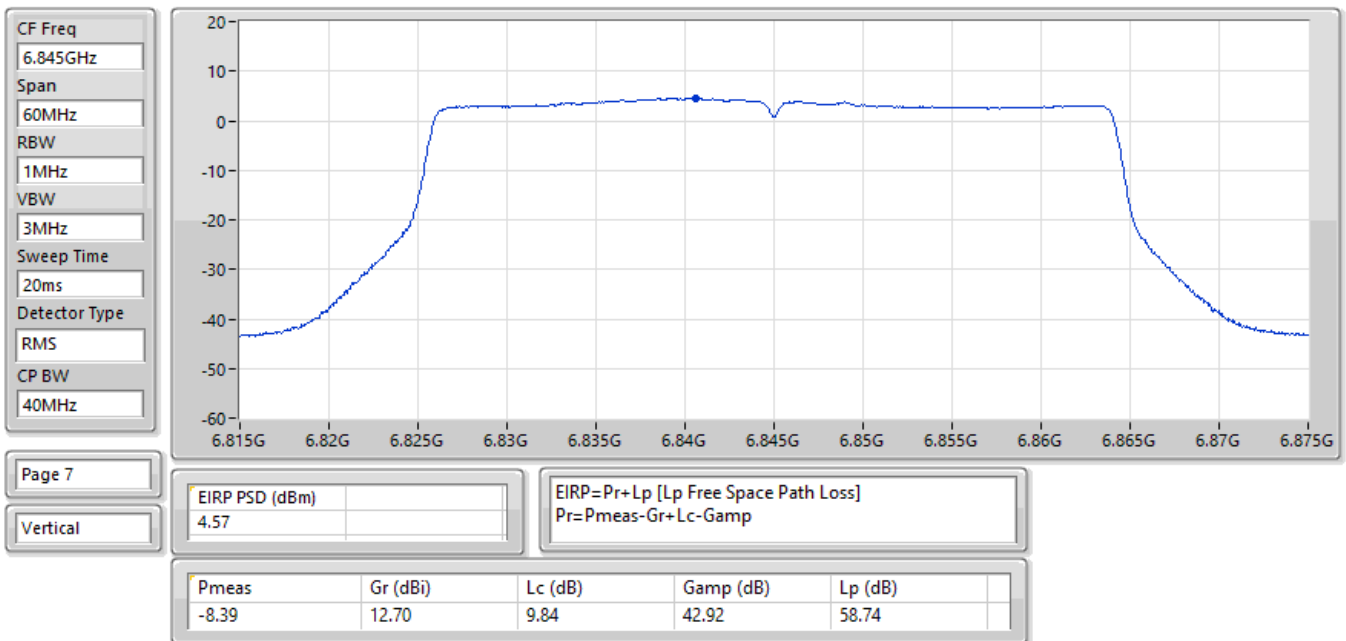


23/04/2026

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

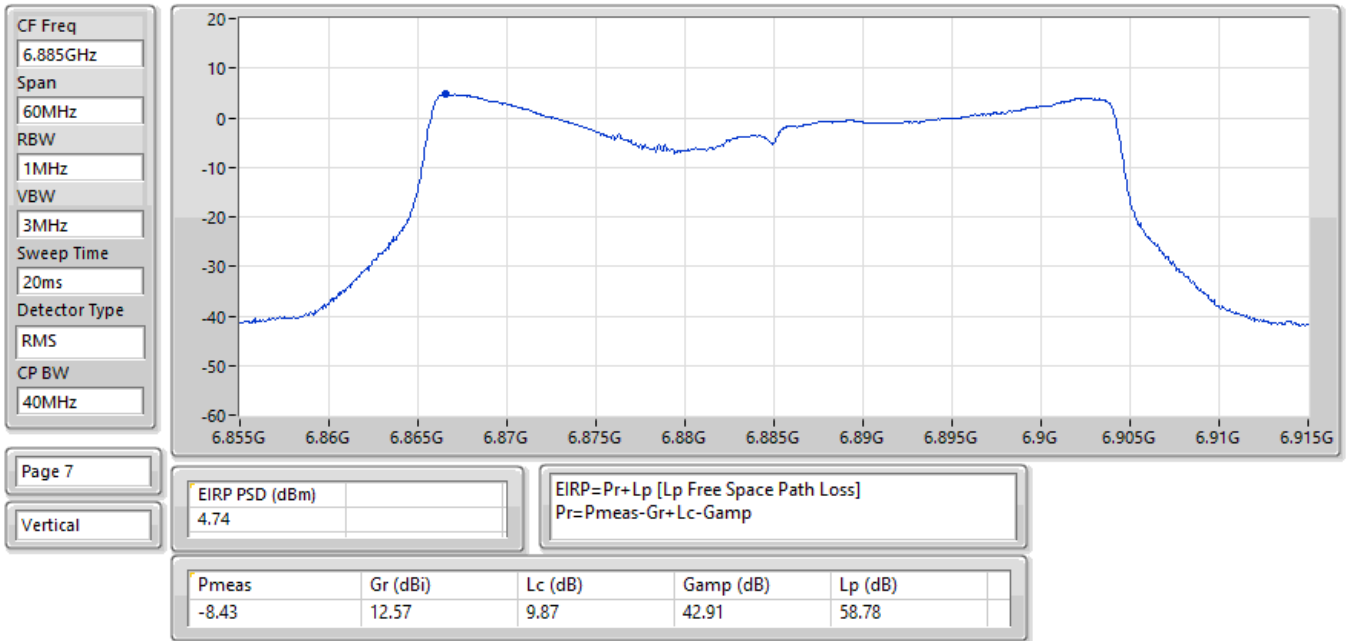


23/04/2026

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

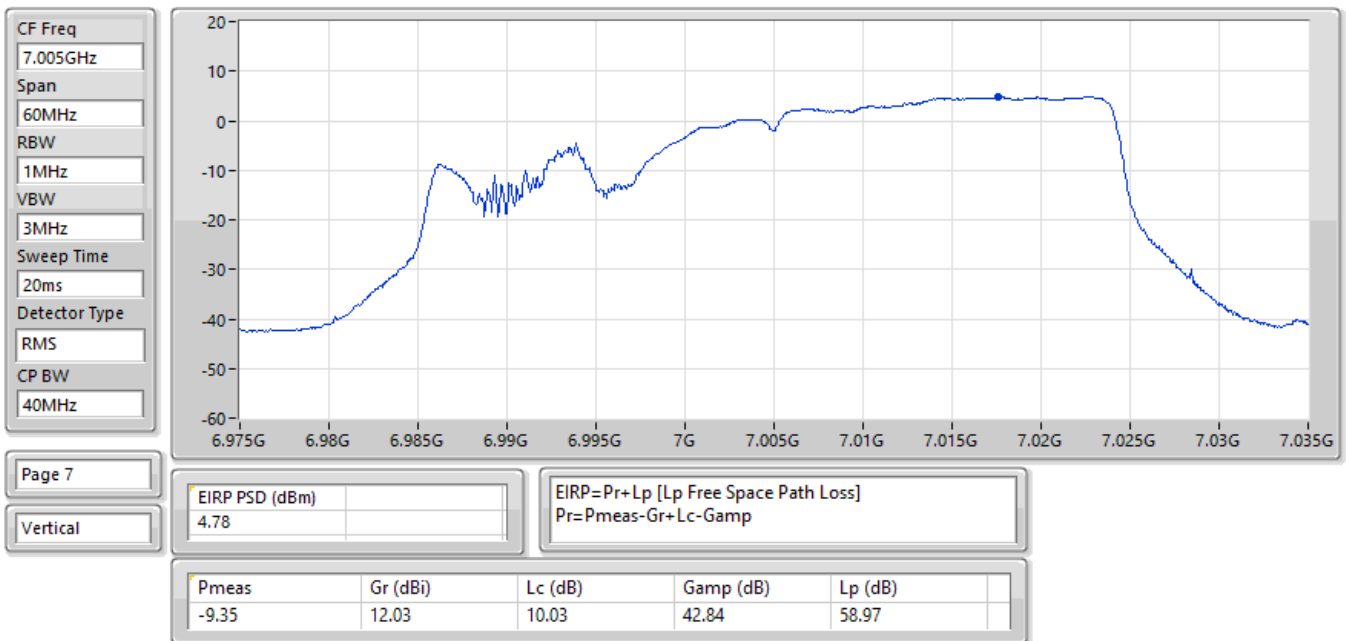


23/04/2026

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

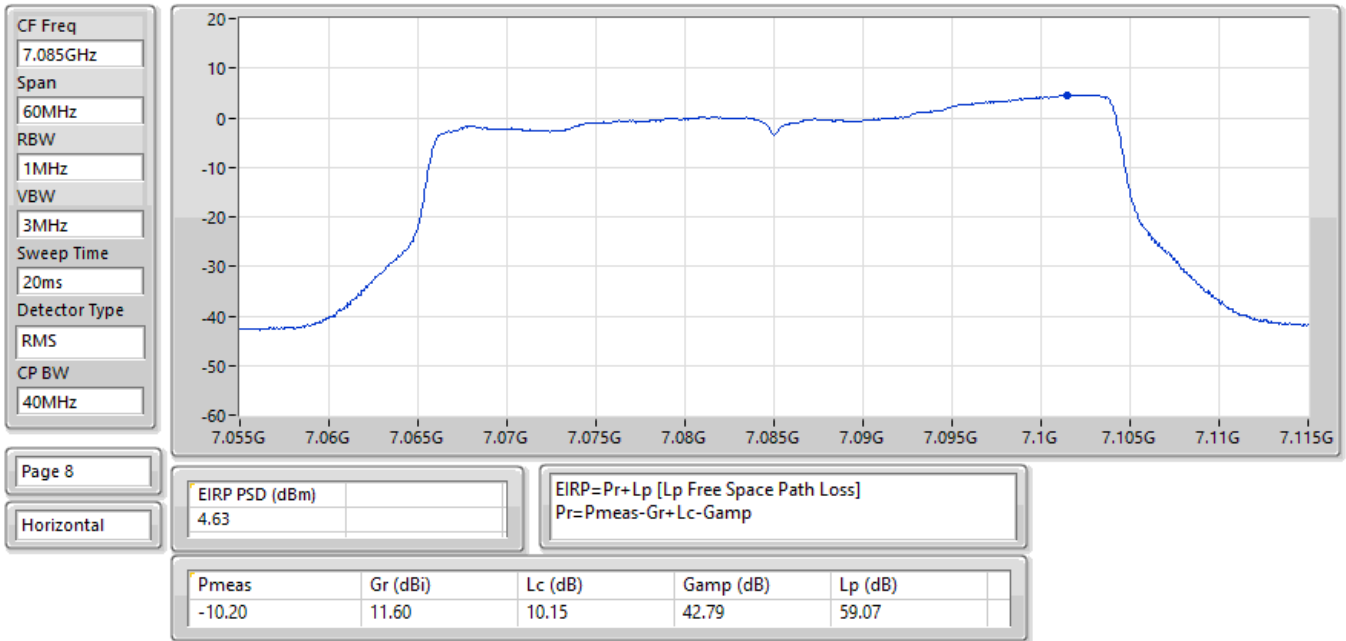

20/04/2026

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

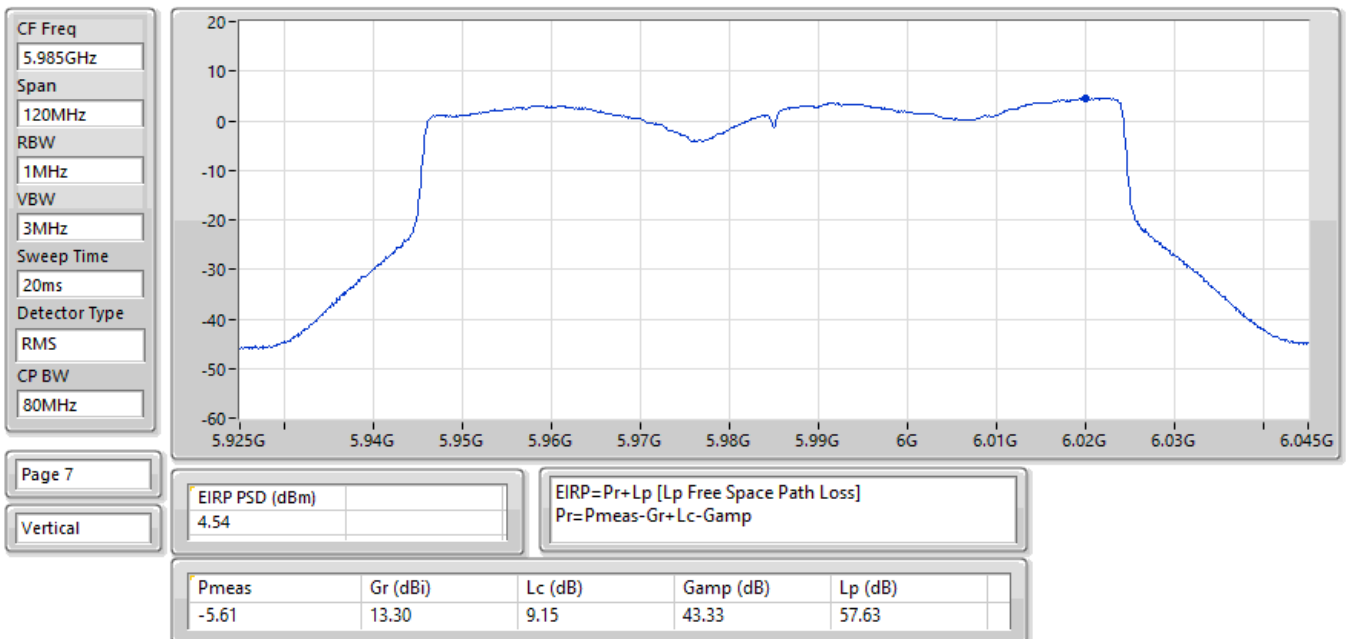

20/04/2026

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

CF Freq
6.225GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

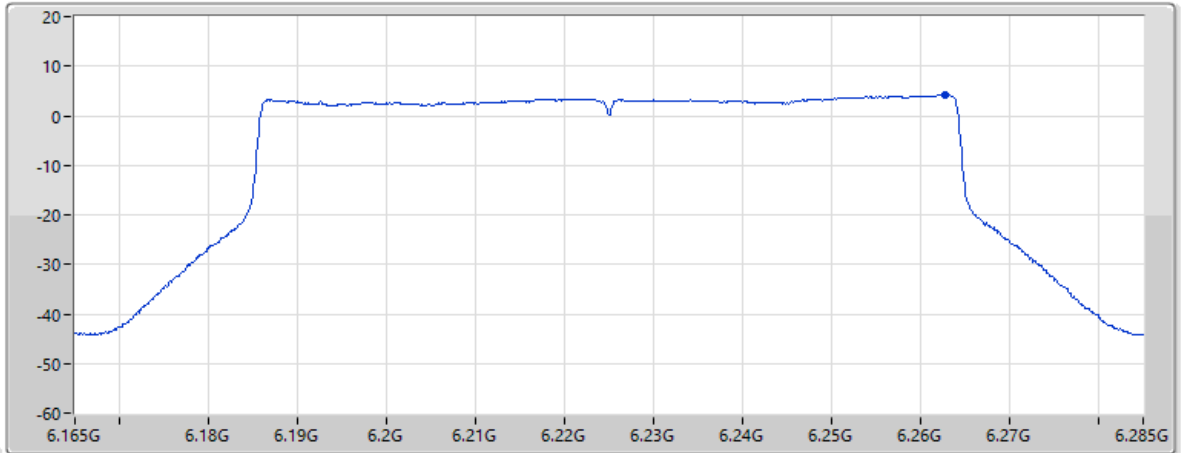

Page 8

Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.3				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-6.73	13.10	9.35	43.20	57.98

23/04/2026

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

CF Freq
6.385GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

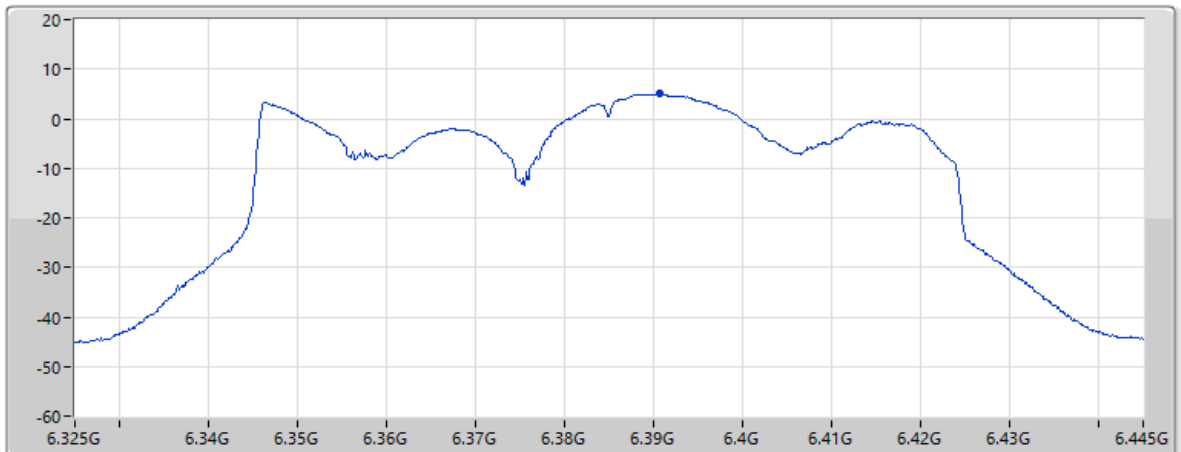


Page 8

Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.96				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-6.74	12.82	9.50	43.13	58.15


23/04/2026

EIRP PSD:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

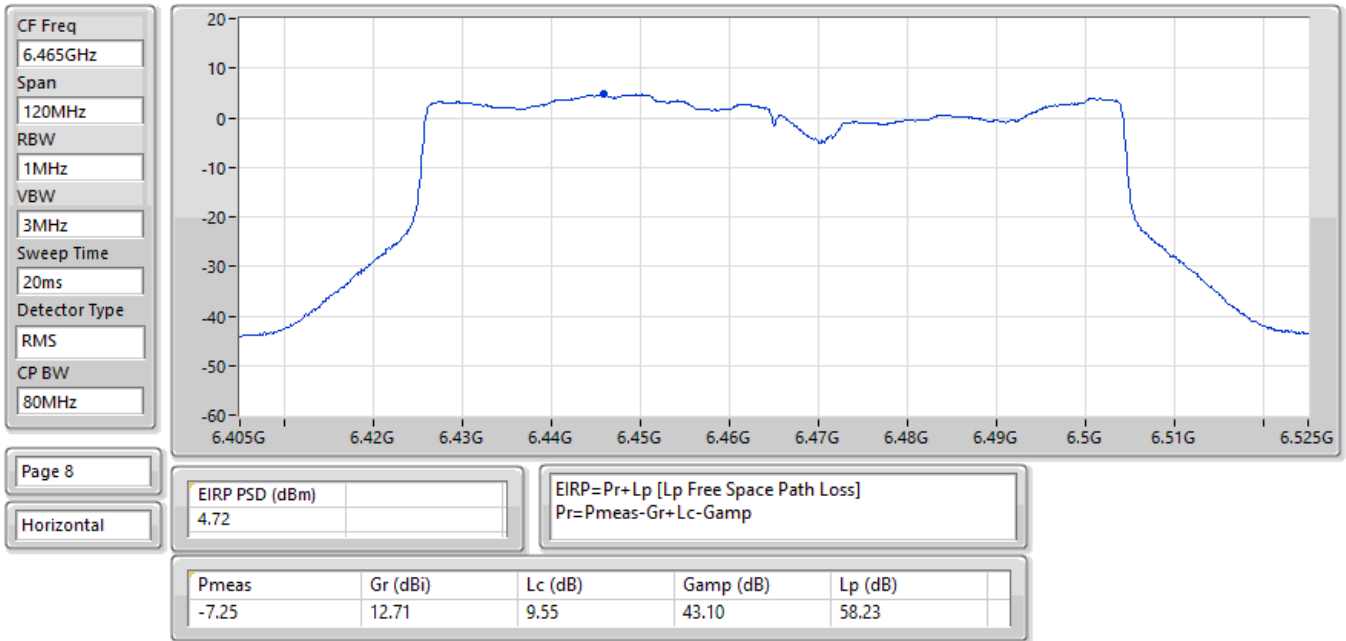

23/04/2026

EIRP PSD:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6545MHz;TX

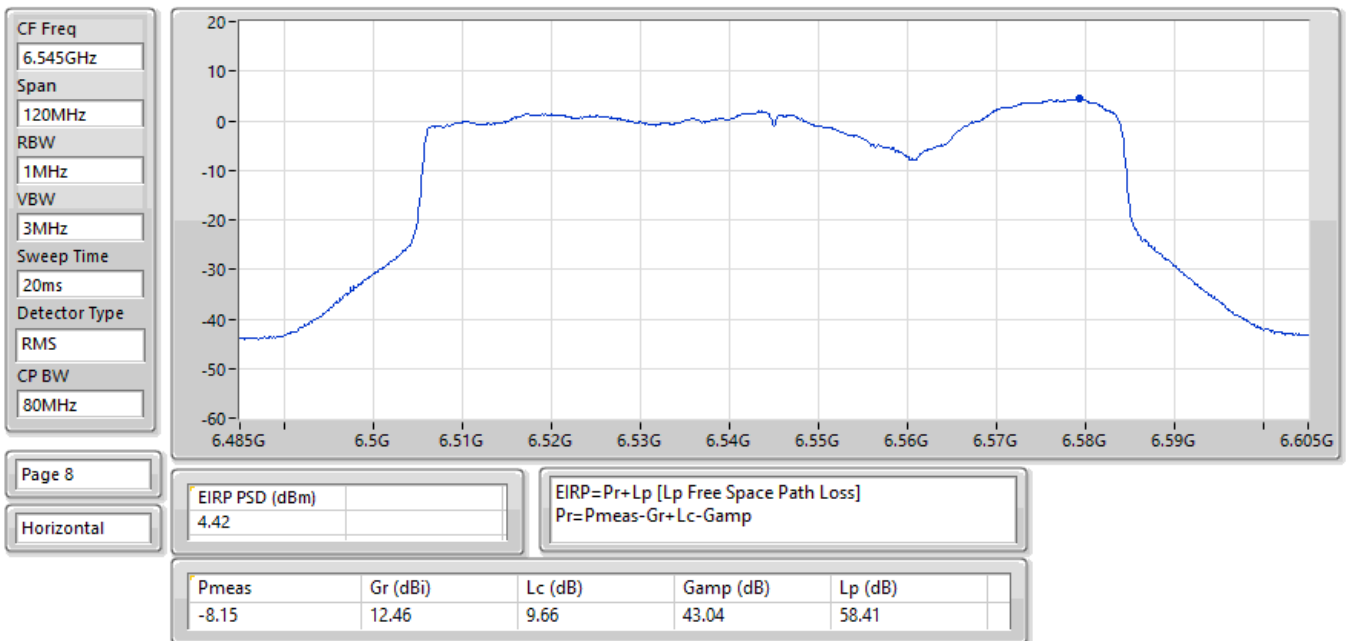

23/04/2026

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

CF Freq
6.625GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

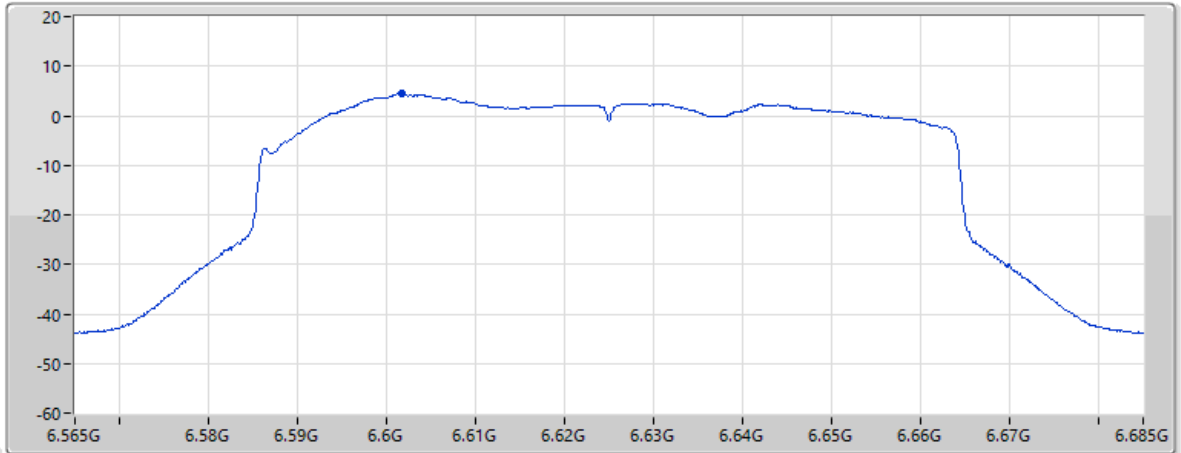

Page 8

Horizontal

EIRP PSD (dBm)	4.44	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-8.15	12.50	9.68	43.03	58.44

23/04/2026

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

CF Freq
6.705GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

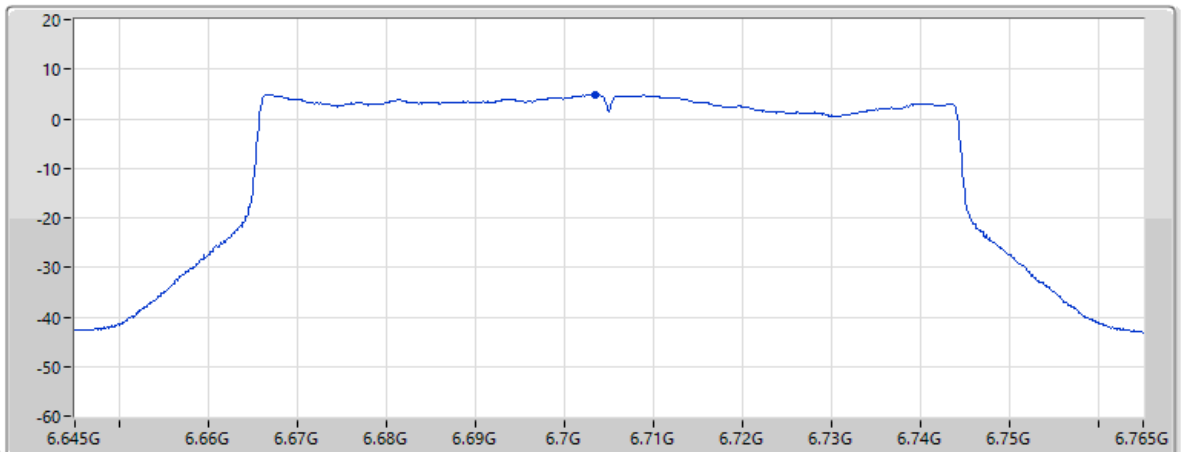


Page 7

Vertical

EIRP PSD (dBm)	4.89	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-7.83	12.61	9.74	42.98	58.57


23/04/2026

EIRP PSD:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

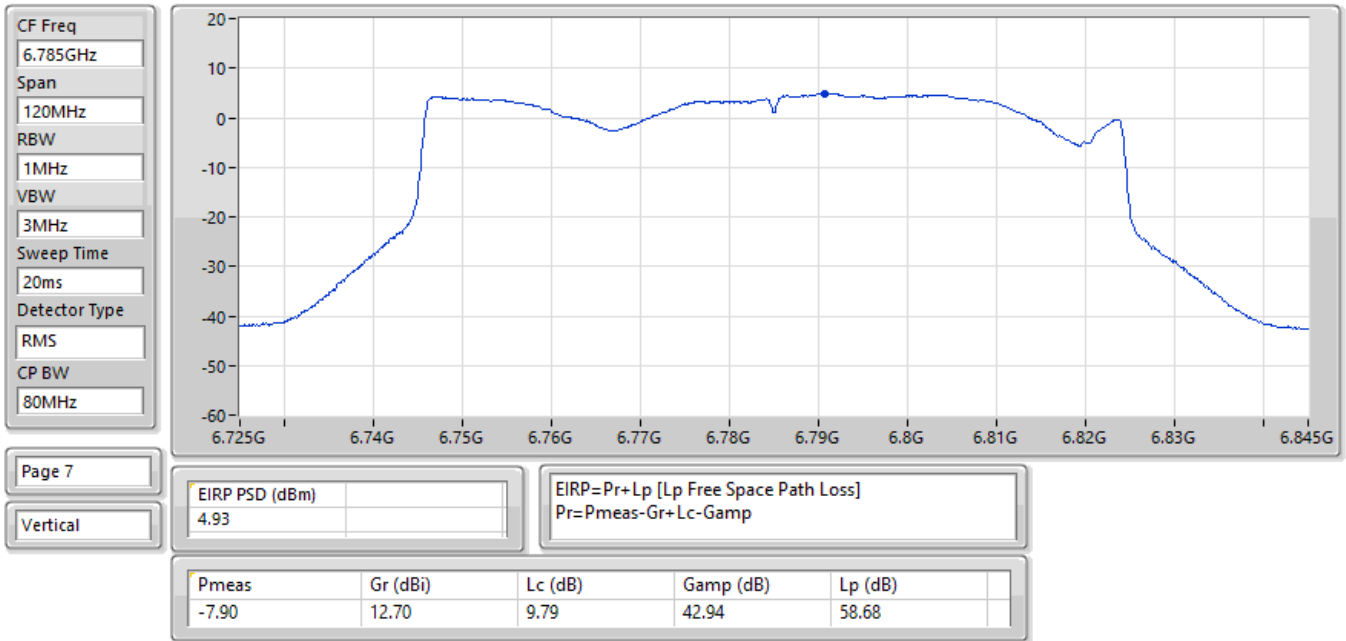


23/04/2026

EIRP PSD:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

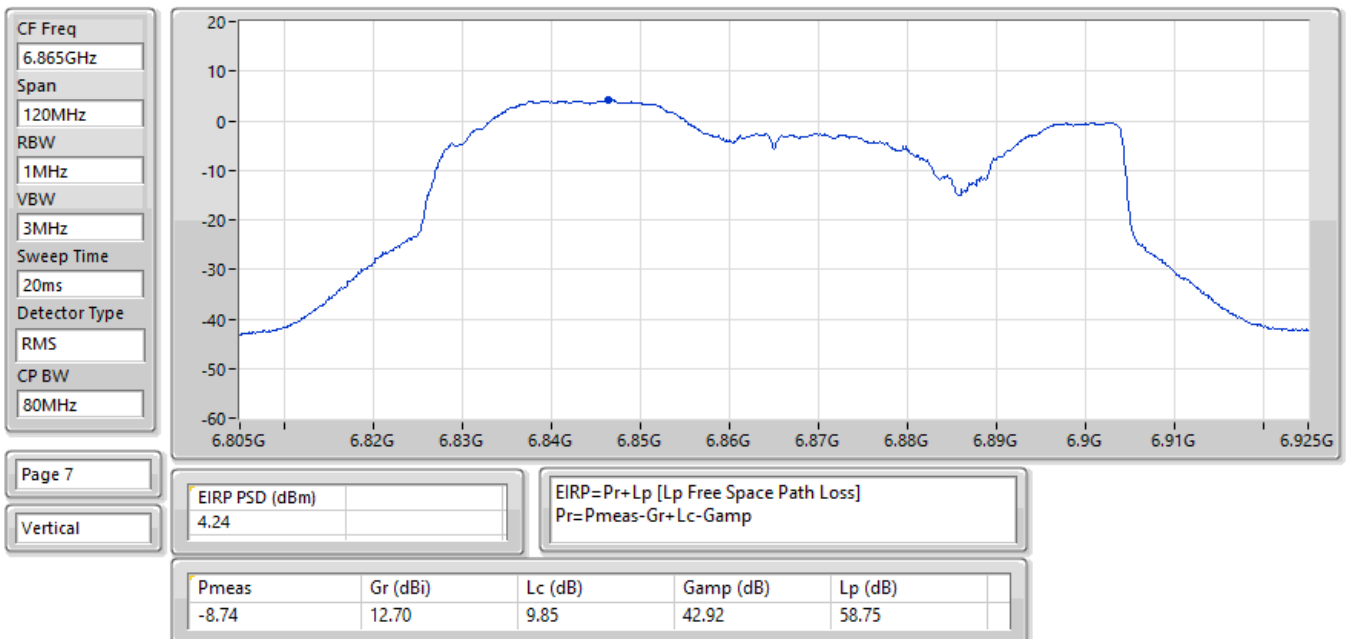


23/04/2026

EIRP PSD;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

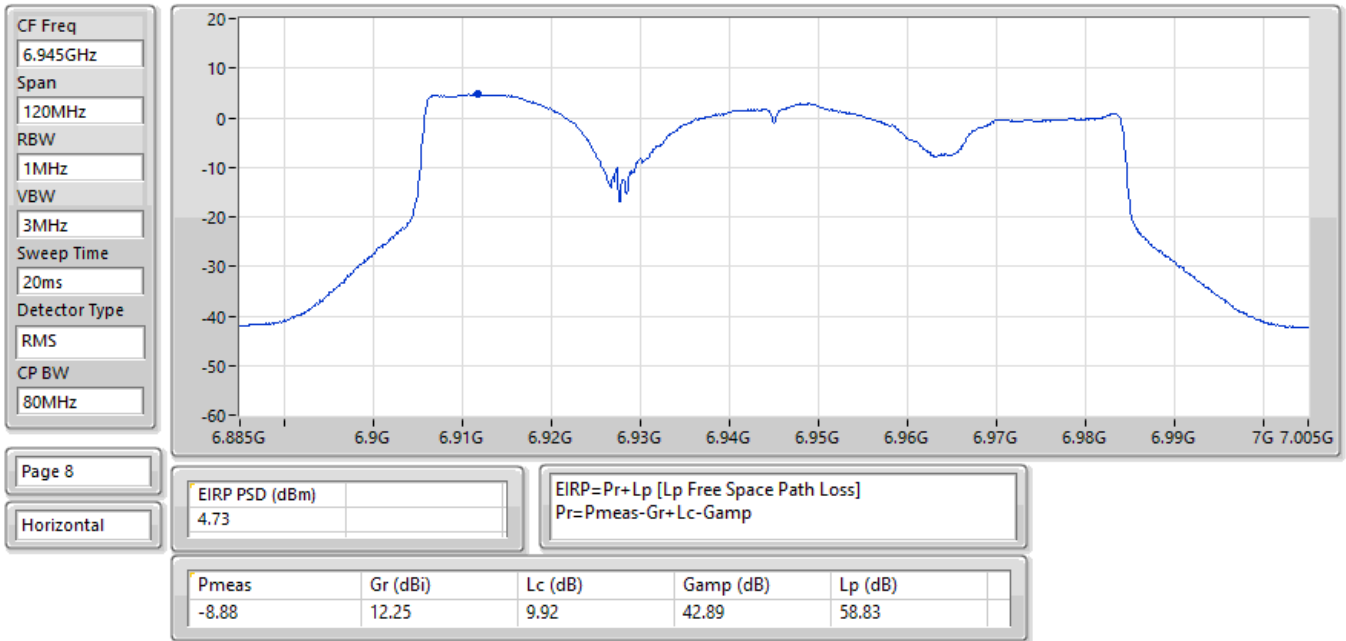


23/04/2026

EIRP PSD;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

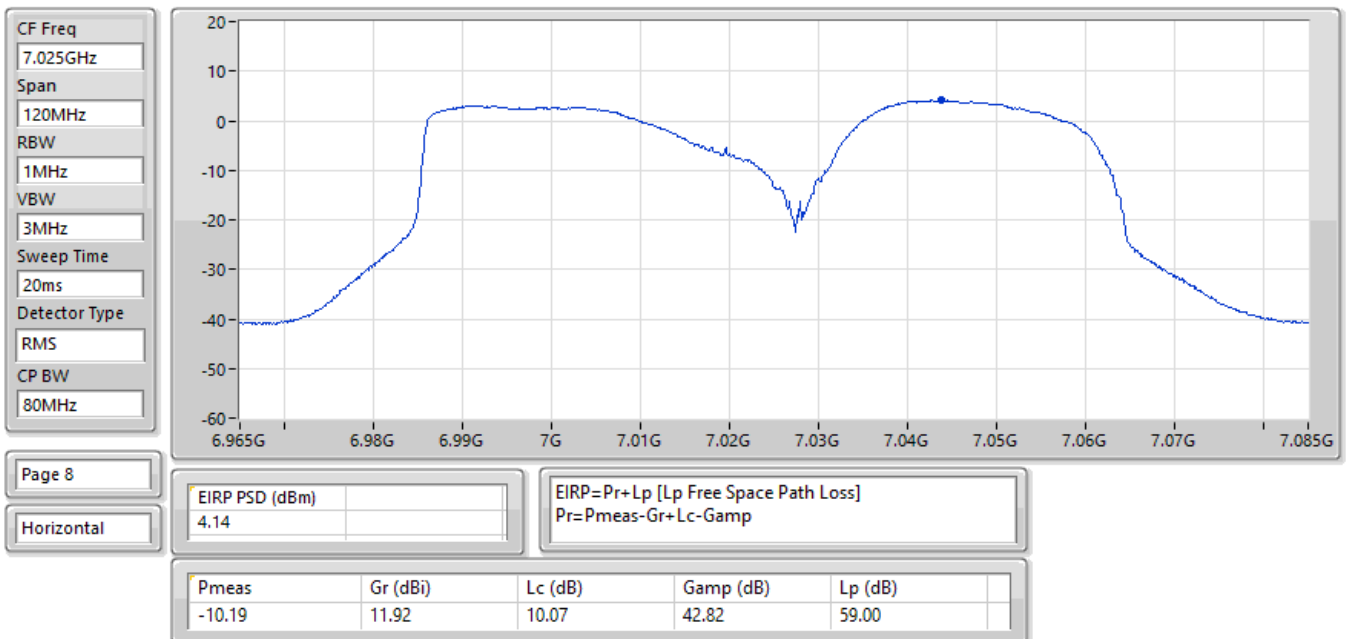


23/04/2026

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

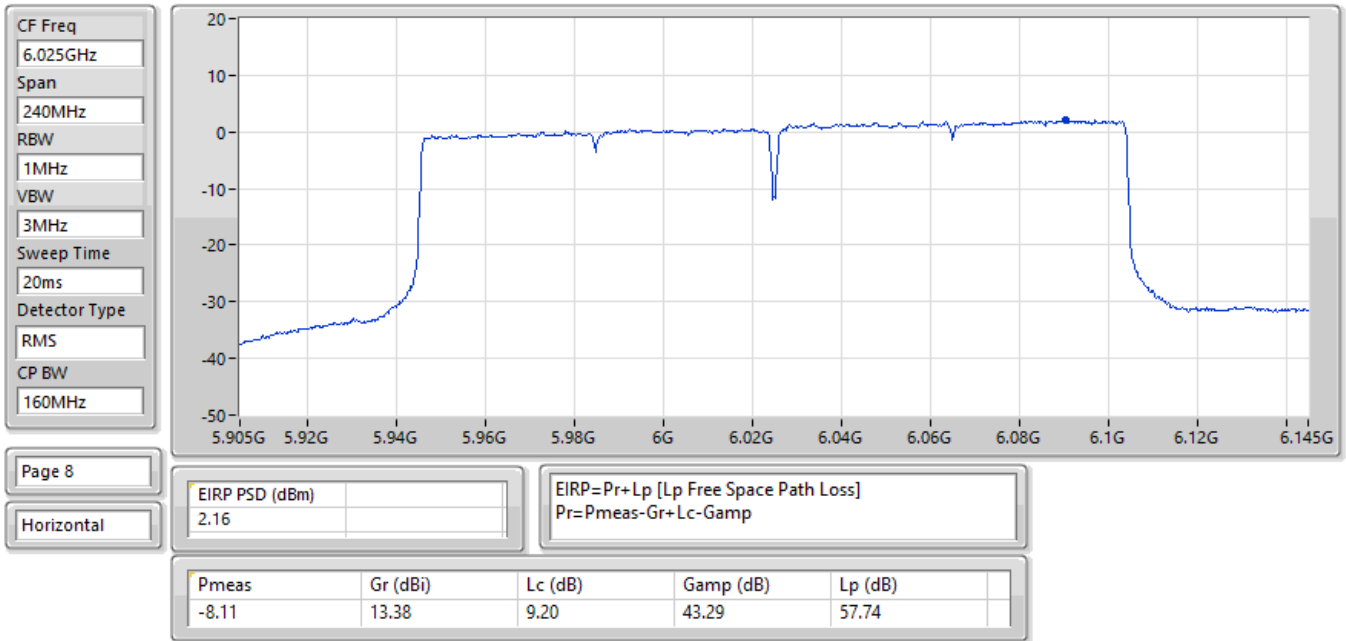


23/04/2026

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

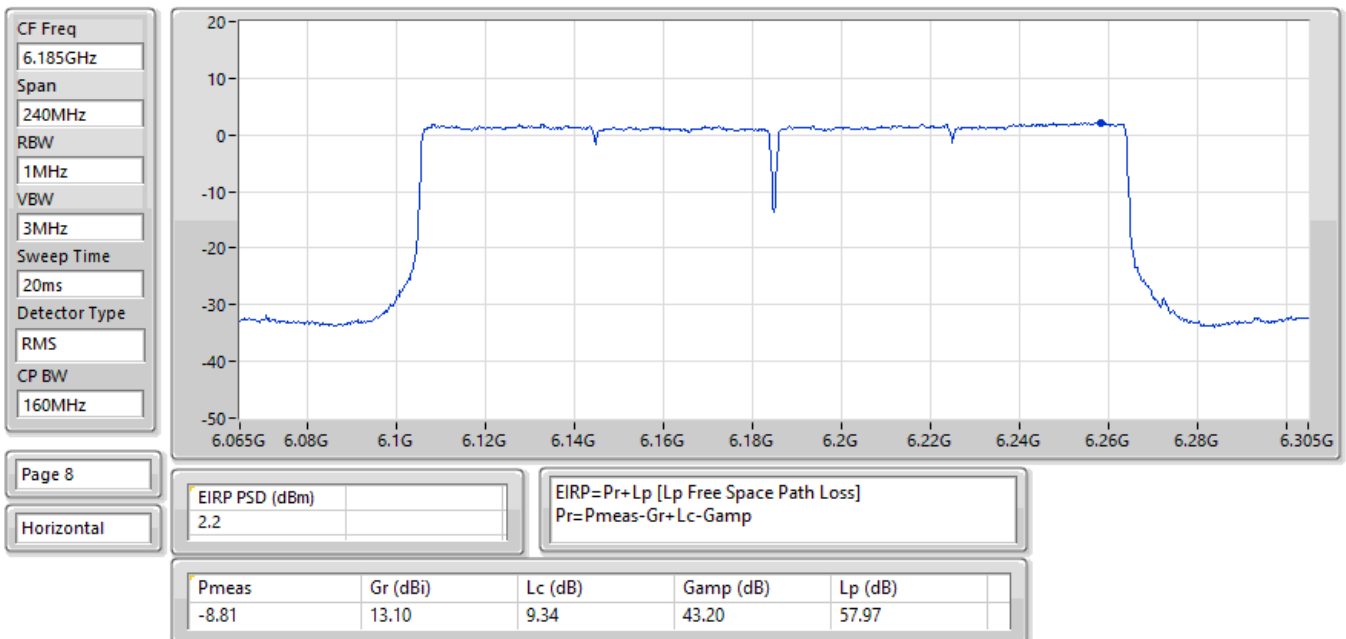


23/04/2026

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

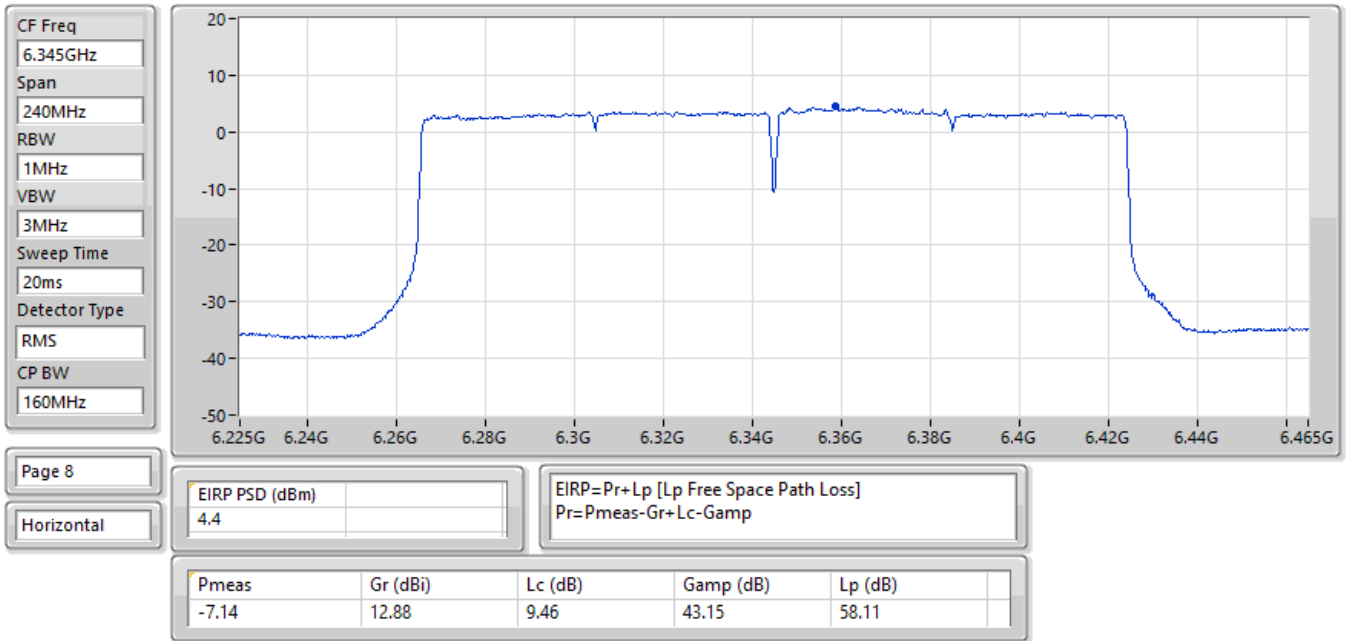


24/04/2026

EIRP PSD;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

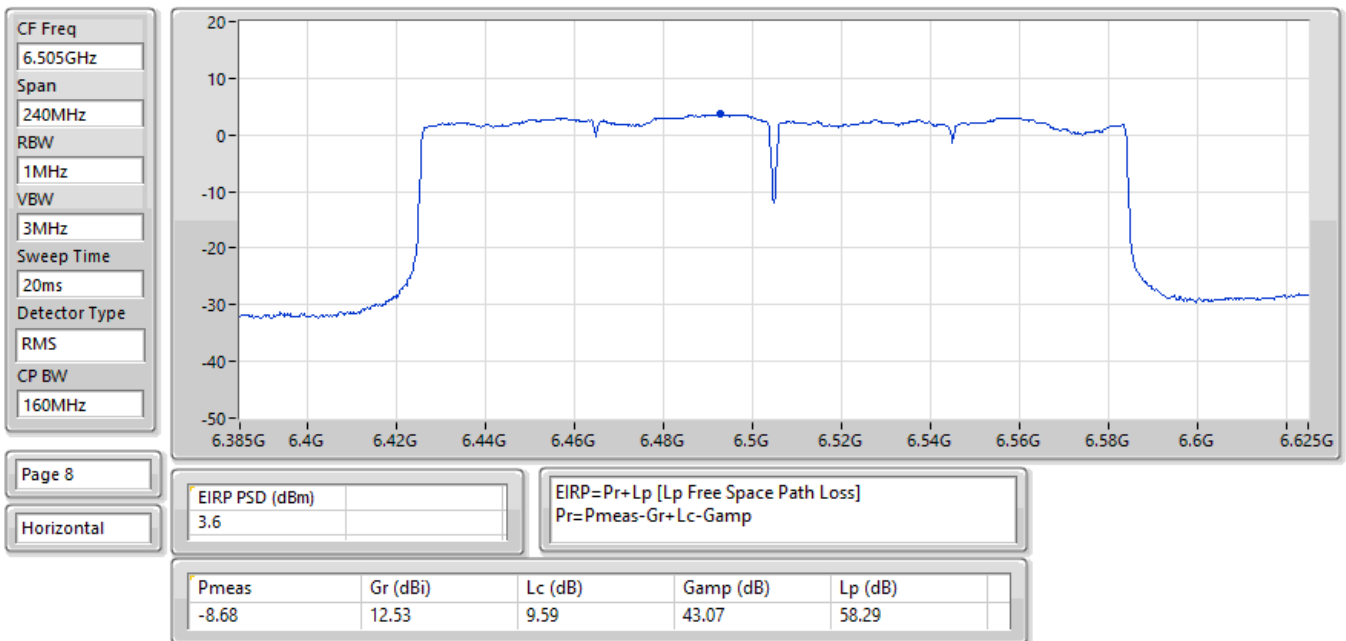


24/04/2026

EIRP PSD;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

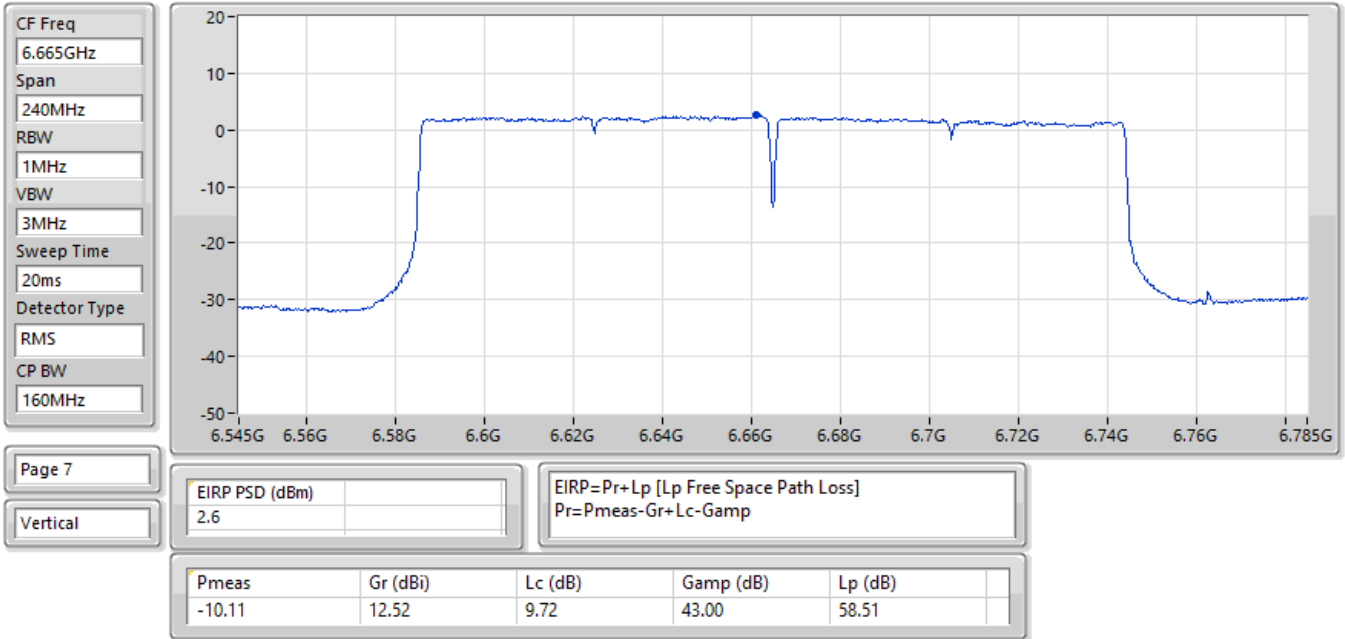


24/04/2026

EIRP PSD;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

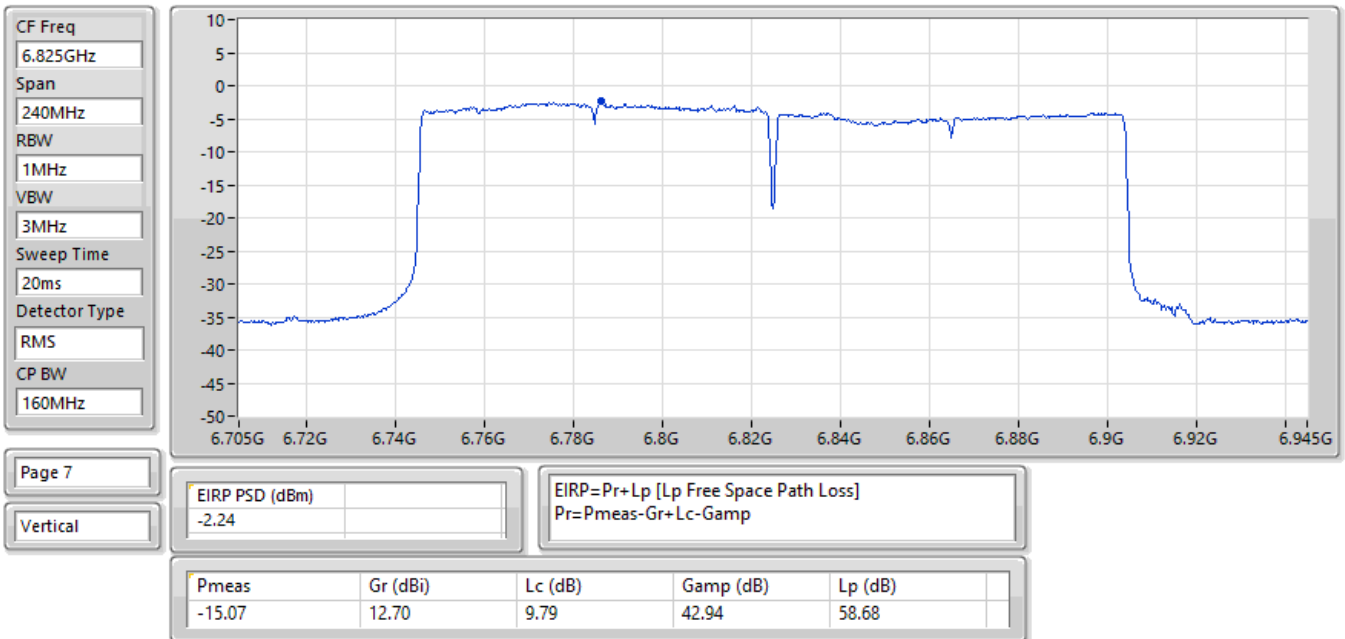


24/04/2026

EIRP PSD;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

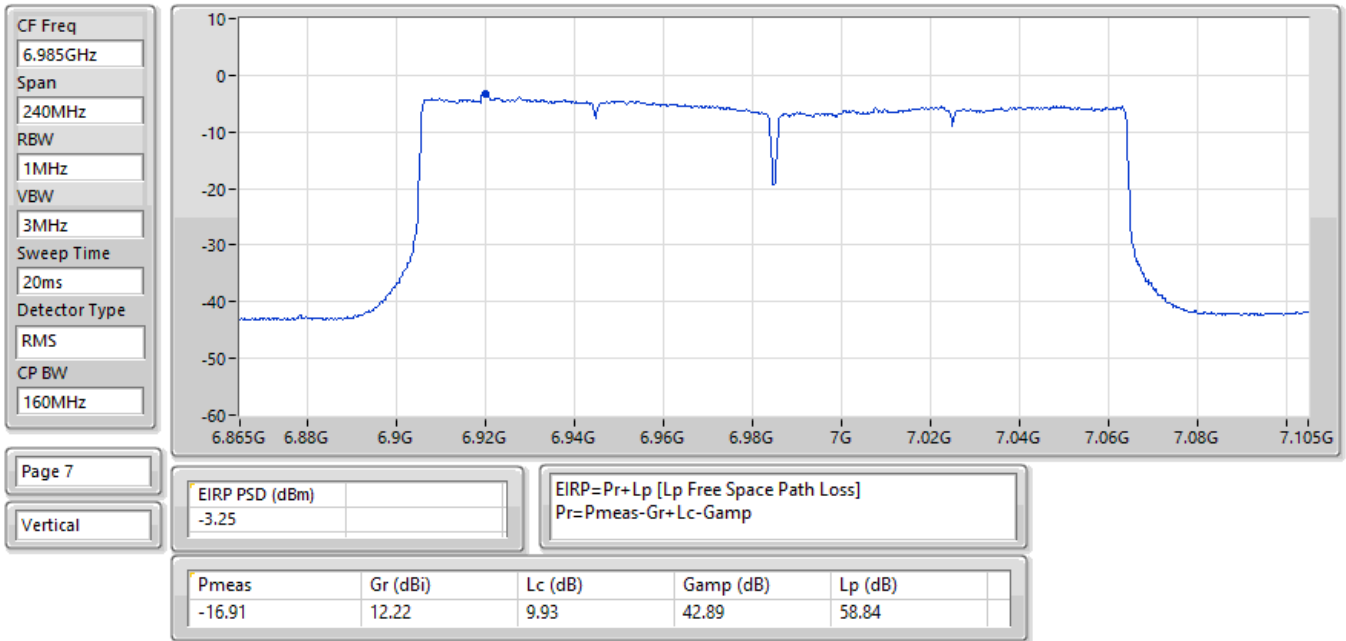


24/04/2026

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

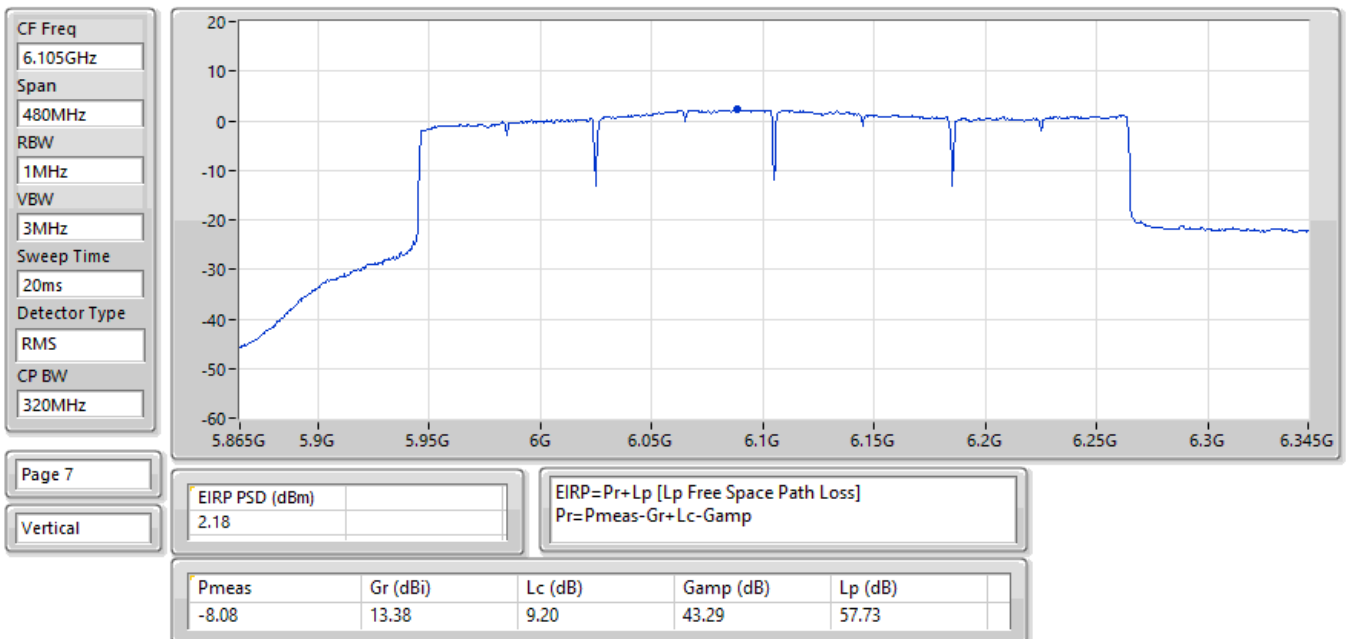


24/04/2026

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

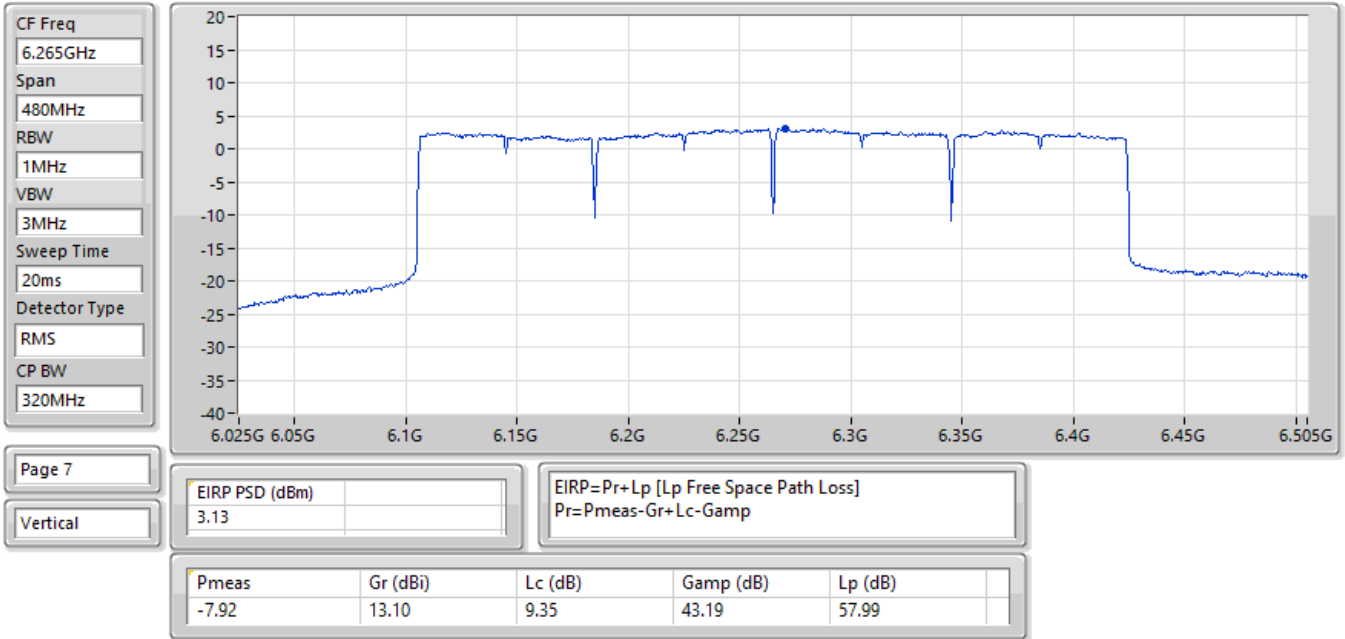


24/04/2026

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6425MHz;TX

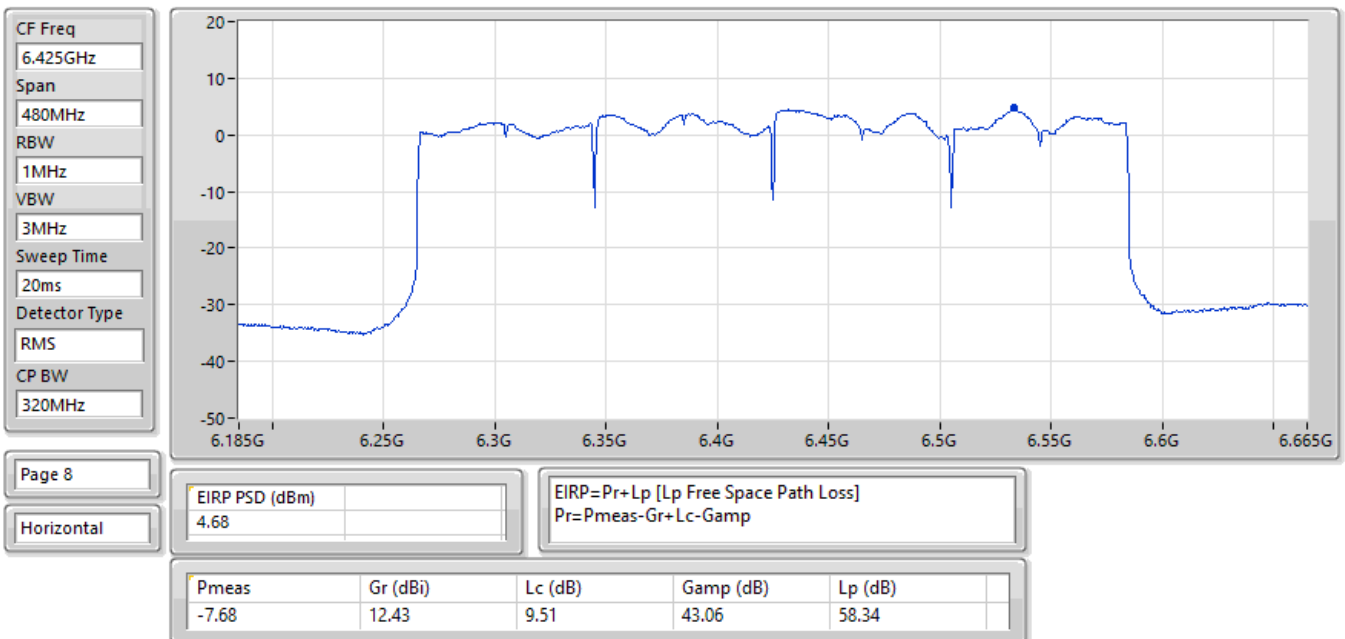


24/04/2026

EIRP PSD;Band:6.4G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

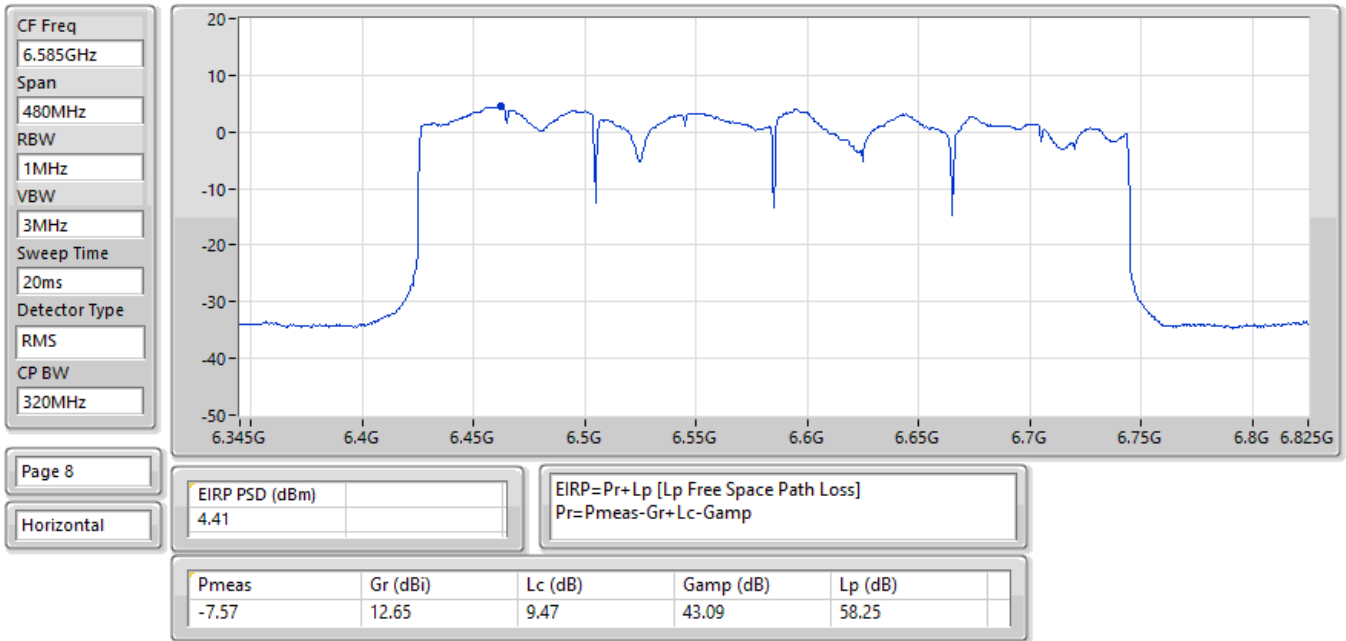


24/04/2026

EIRP PSD;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

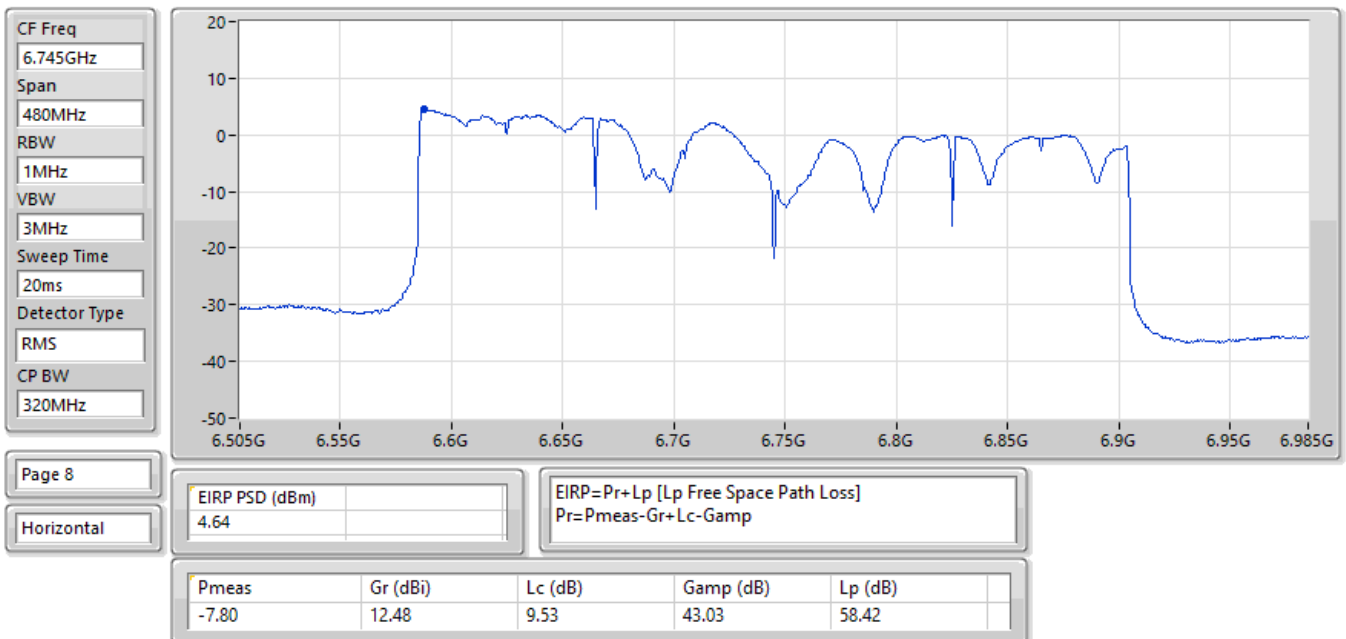

24/04/2026

EIRP PSD;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6905MHz;TX

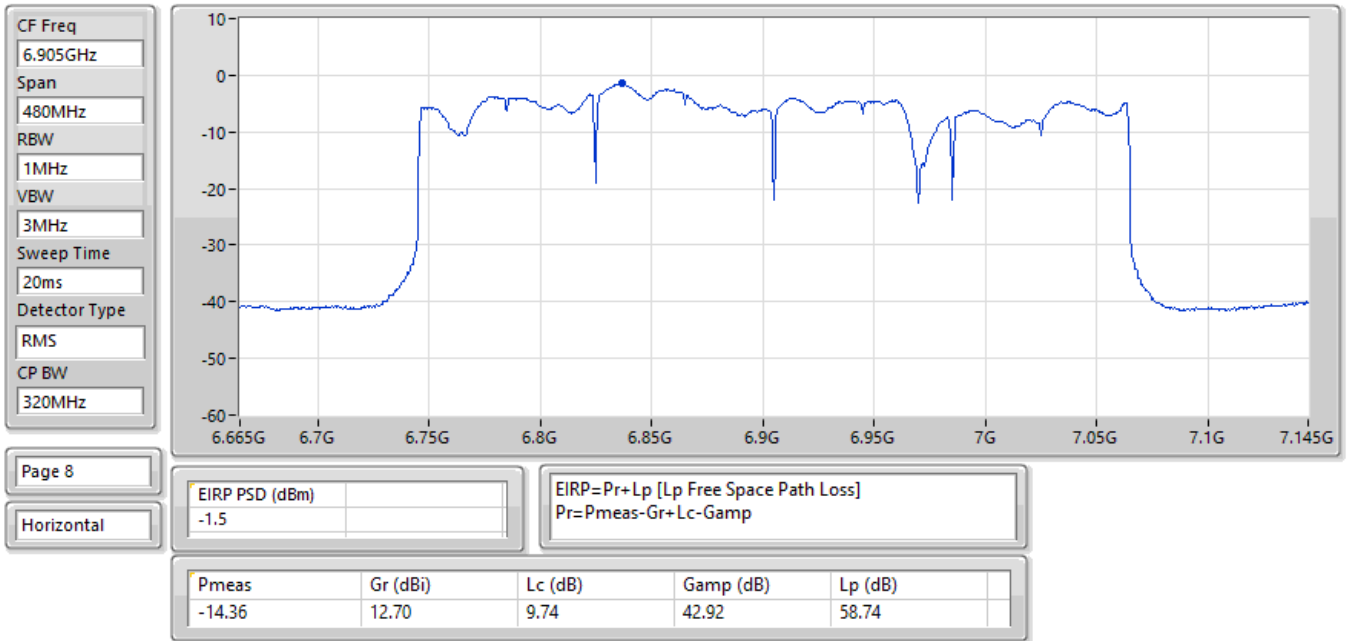



Radiated PSD Test Mode: Mode 3

Appendix D.3

Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0)_4TX	-Inf
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	4.52
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	4.51
802.11be EHT80_Nss1,(MCS0)_4TX	-Inf
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-Inf
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-Inf
802.11be EHT80_Nss1,(MCS0)_4TX	-Inf
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-Inf
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-Inf
802.11be EHT160_Nss1,(MCS0)_4TX	-Inf
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	4.58
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	4.29
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	4.78
802.11be EHT160_Nss1,(MCS0)_4TX	-Inf
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-Inf
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-Inf
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-Inf
802.11be EHT160_Nss1,(MCS0)_4TX	-Inf
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-Inf
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-Inf
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-Inf
802.11be EHT320_Nss1,(MCS0)_4TX	-Inf
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	4.70
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-Inf
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	4.65
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	4.64
802.11be EHT320_Nss1,(MCS0)_4TX	-Inf
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-Inf
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-Inf
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-Inf
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-Inf
6.875-7.125GHz	-
802.11be EHT80_Nss1,(MCS0)_4TX	-Inf
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-Inf
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-Inf
802.11be EHT80_Nss1,(MCS0)_4TX	-Inf
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	4.51
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	4.49
802.11be EHT160_Nss1,(MCS0)_4TX	-Inf
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	3.91
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	4.65
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-Inf
802.11be EHT320_Nss1,(MCS0)_4TX	-Inf
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-Inf
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	1.26
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-Inf
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	1.36

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-
5985MHz	Pass	4.52	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-
5985MHz	Pass	4.51	5.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
6225MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-
6225MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-
6225MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
6385MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-
6385MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-
6385MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
6945MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-
6945MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-
6945MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
7025MHz	Pass	-Inf	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-
7025MHz	Pass	4.51	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-
7025MHz	Pass	4.49	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-
6025MHz	Pass	4.58	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-
6025MHz	Pass	4.29	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-
6025MHz	Pass	4.78	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6185MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-
6185MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-
6185MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-
6185MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6345MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-
6345MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-
6345MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-
6345MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6985MHz	Pass	-Inf	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-
6985MHz	Pass	3.91	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-
6985MHz	Pass	4.65	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-
6985MHz	Pass	4.36	5.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-
6105MHz	Pass	4.70	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-
6105MHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-
6105MHz	Pass	4.65	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-
6105MHz	Pass	4.64	5.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6425MHz Straddle 5.925-6.425GHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-
6425MHz Straddle 5.925-6.425GHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-
6425MHz Straddle 5.925-6.425GHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-
6425MHz Straddle 5.925-6.425GHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-
6425MHz Straddle 5.925-6.425GHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6905MHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-
6905MHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-
6905MHz	Pass	1.26	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-
6905MHz	Pass	-Inf	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-
6905MHz	Pass	1.36	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

11/04/2026

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 3;Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

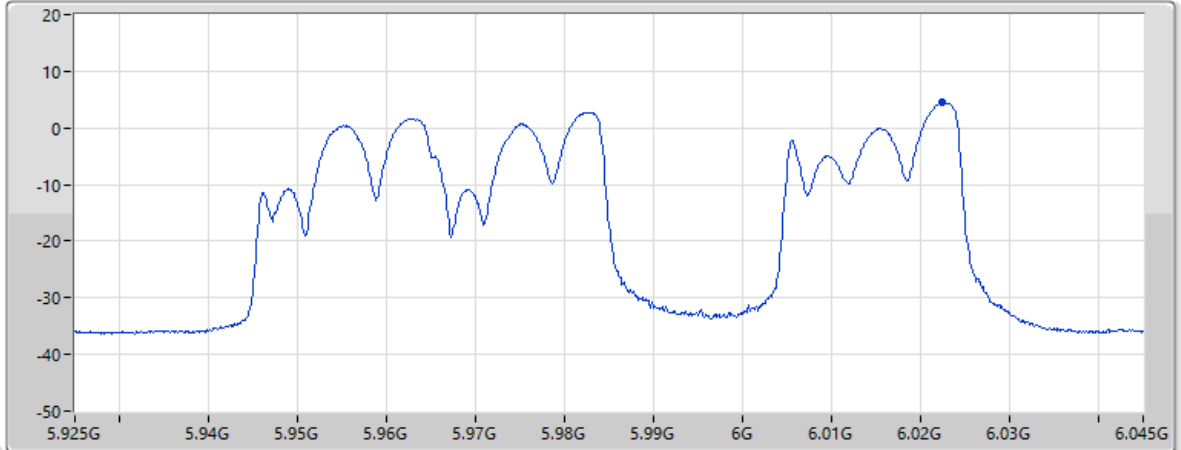

Page 7

Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.52				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.19	11.70	10.21	32.44	57.64

11/04/2026

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU242+RU242 MRU 1;Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

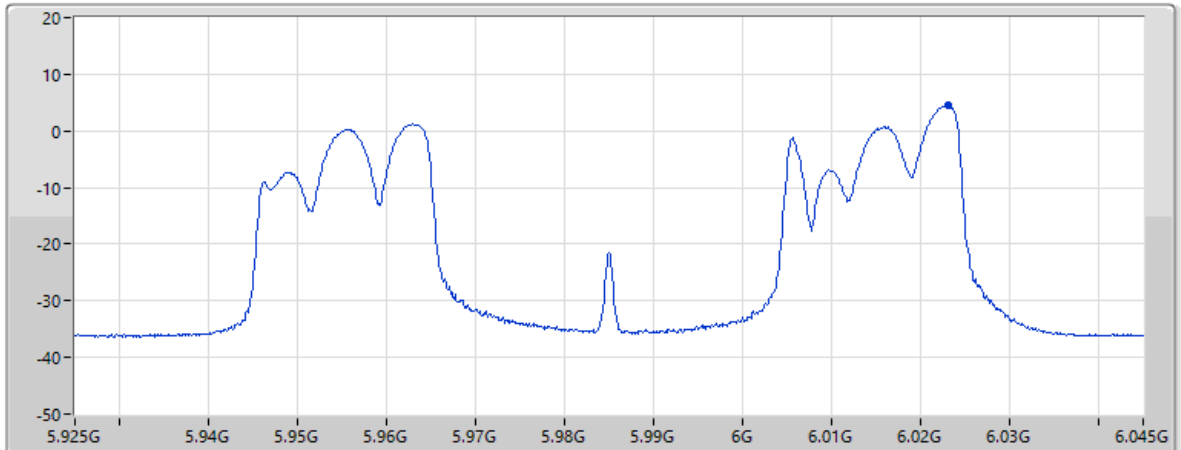

Page 7

Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.51				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.20	11.70	10.21	32.44	57.64

11/04/2026

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 3;Nant:4;Ch:7025MHz;TX

CF Freq
7.025GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

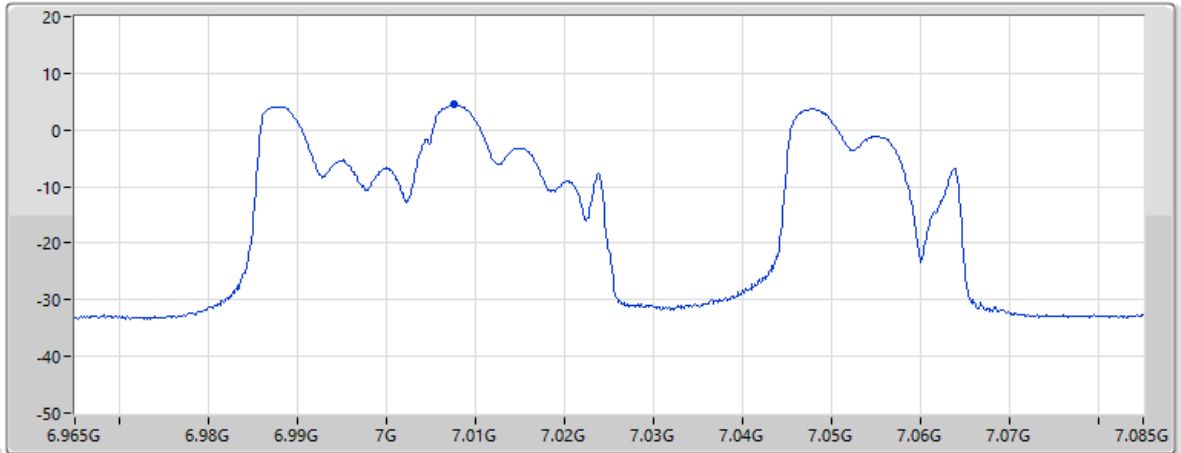

Page 7

Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.51				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.59	11.08	10.98	32.75	58.95

11/04/2026

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU242+RU242 MRU 1;Nant:4;Ch:7025MHz;TX

CF Freq
7.025GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

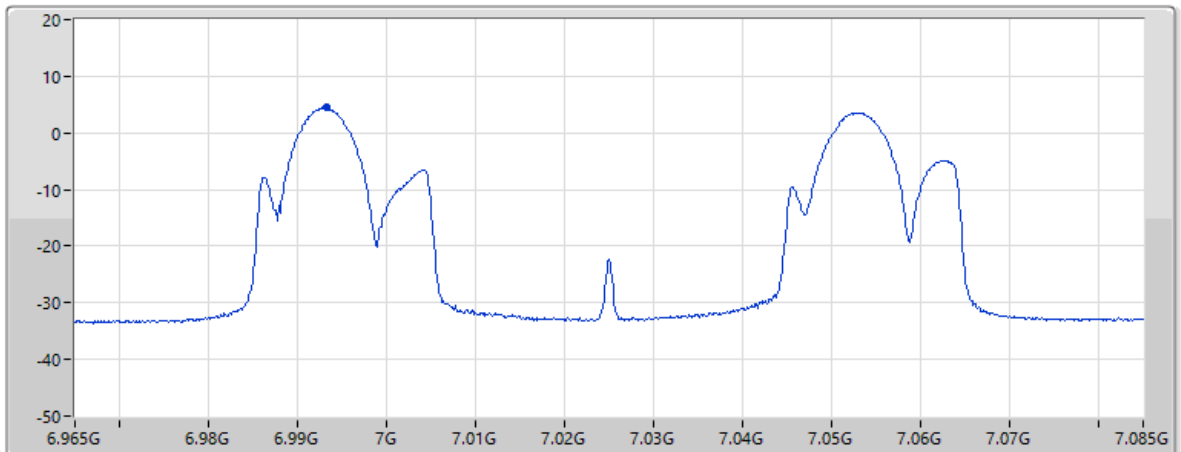


Page 7

Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.49				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.57	11.10	10.96	32.74	58.94


11/04/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 2;Nant:4;Ch:6025MHz;TX

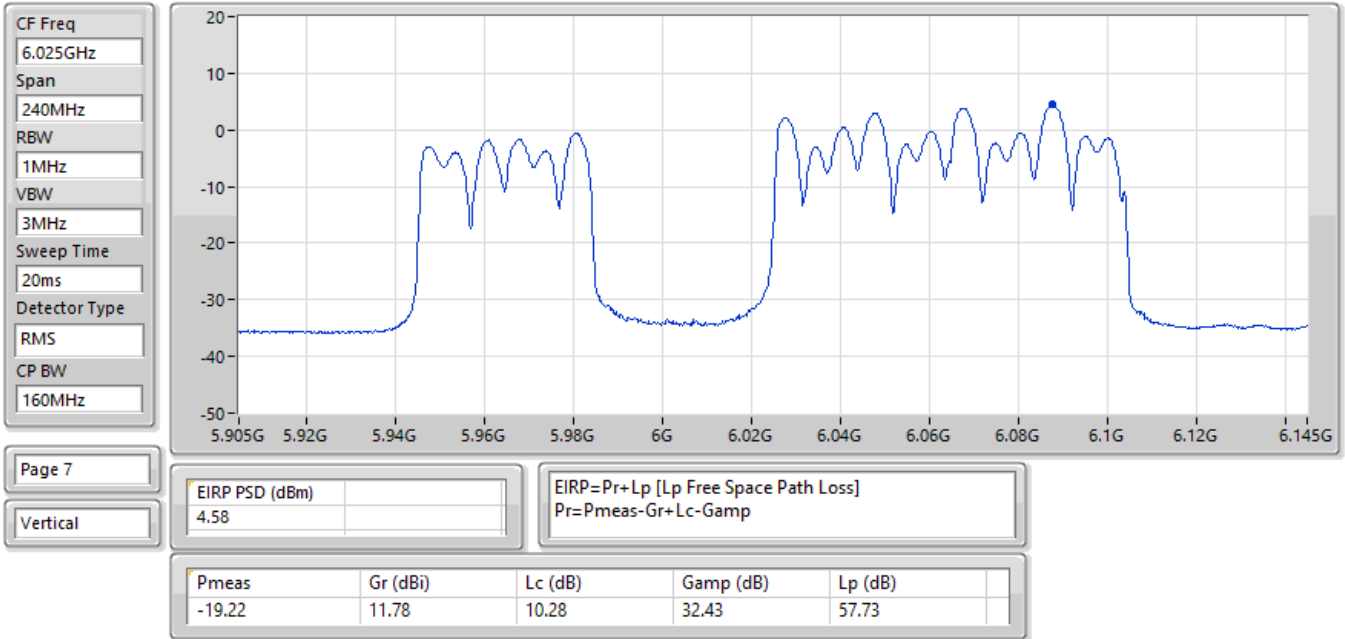

11/04/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU484+3xRU242 MRU 1;Nant:4;Ch:6025MHz;TX

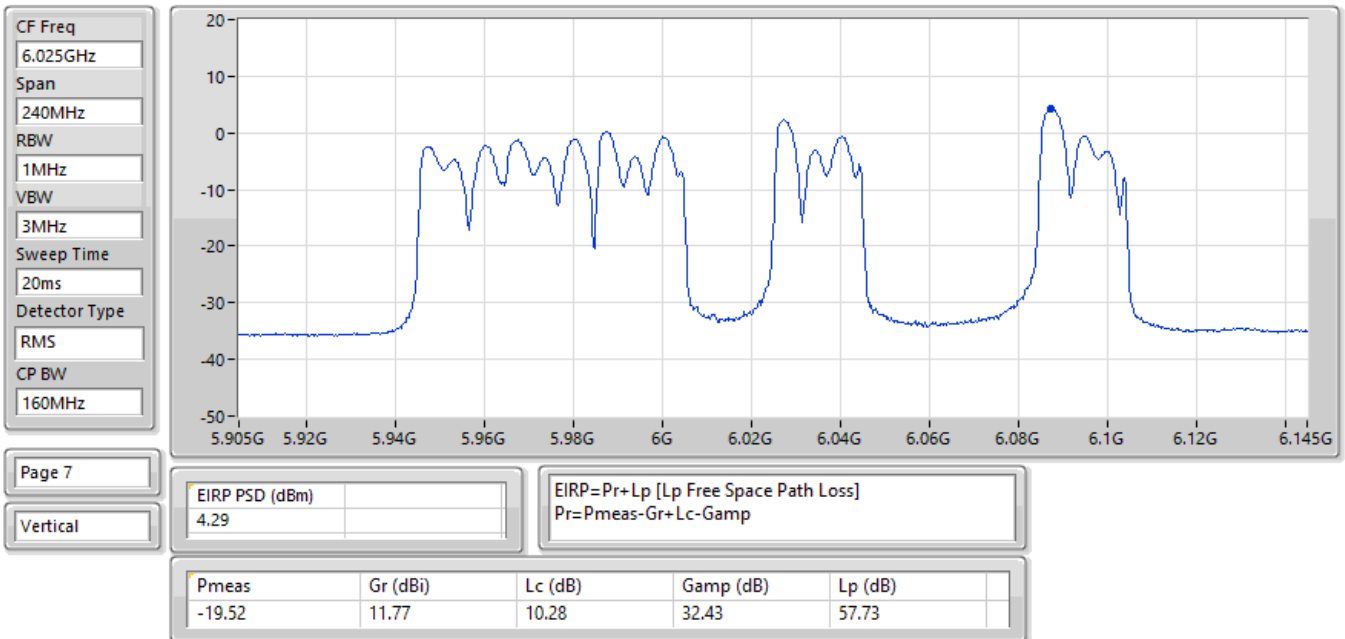

11/04/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU484+RU484 MRU 1;Nant:4;Ch:6025MHz;TX

CF Freq
6.025GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

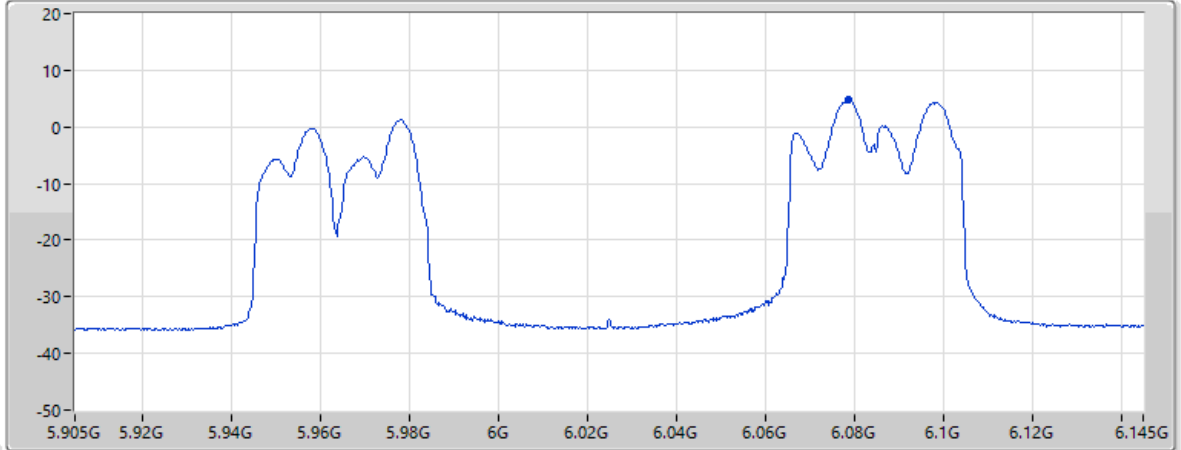

Page 7

Vertical

EIRP PSD (dBm)	4.78	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.02	11.76	10.27	32.43	57.72

11/04/2026

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 2;Nant:4;Ch:6985MHz;TX

CF Freq
6.985GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

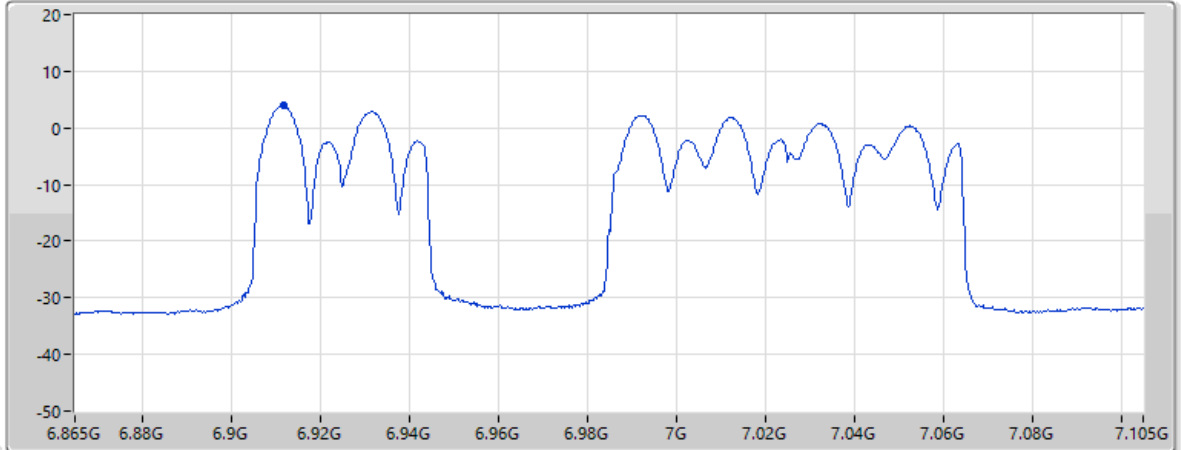

Page 8


Horizontal

EIRP PSD (dBm)	3.91	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-22.22	11.02	11.00	32.68	58.83

11/04/2026

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU484+3xRU242 MRU 1;Nant:4;Ch:6985MHz;TX

CF Freq
6.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

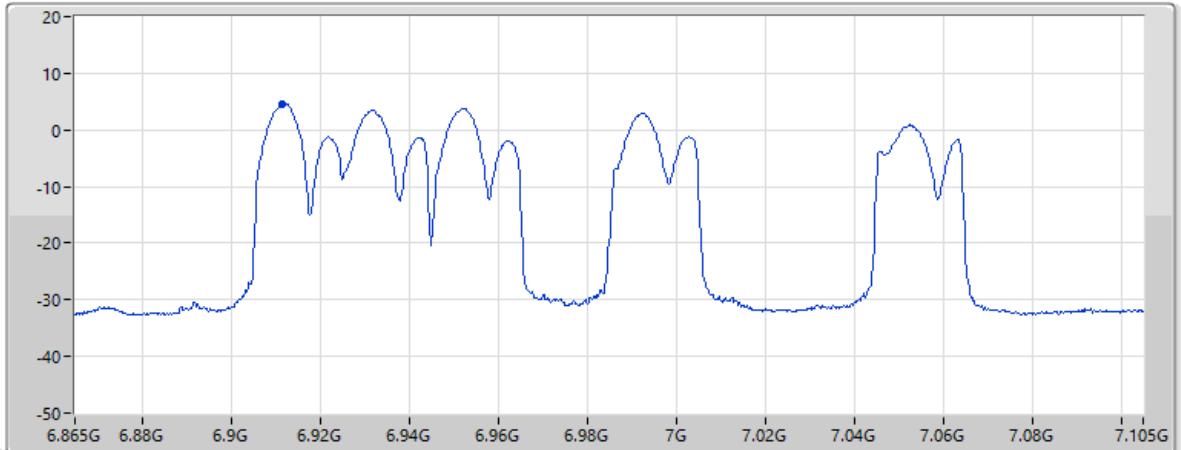


Page 8
Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.65				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.48	11.02	11.00	32.68	58.83

11/04/2026

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU484+RU484 MRU 1;Nant:4;Ch:6985MHz;TX

CF Freq
6.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

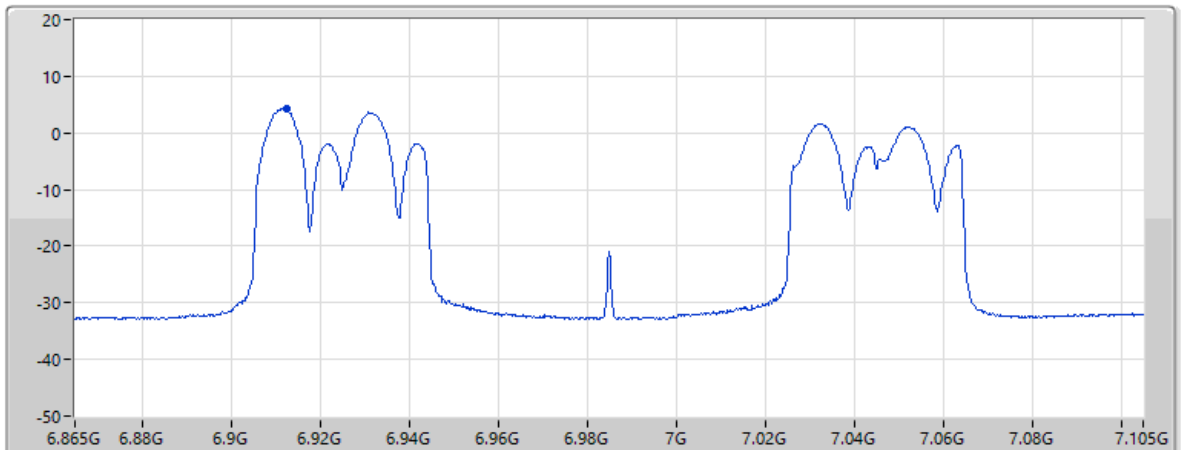

Page 8
Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.36				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.76	11.03	11.00	32.69	58.84

11/04/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996 MRU 4;Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

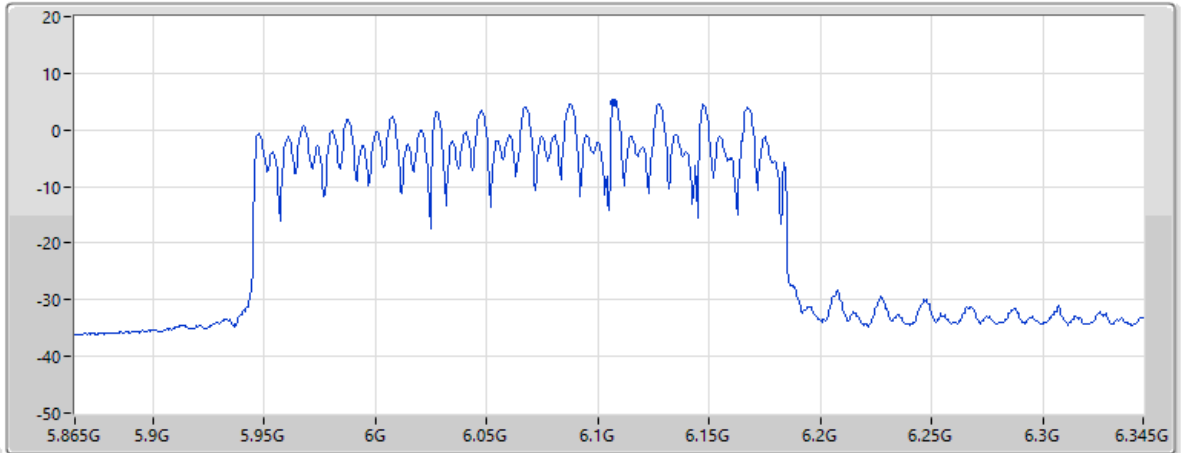

Page 7

Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.7				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.13	11.80	10.30	32.43	57.76

11/04/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 MRU 5;Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

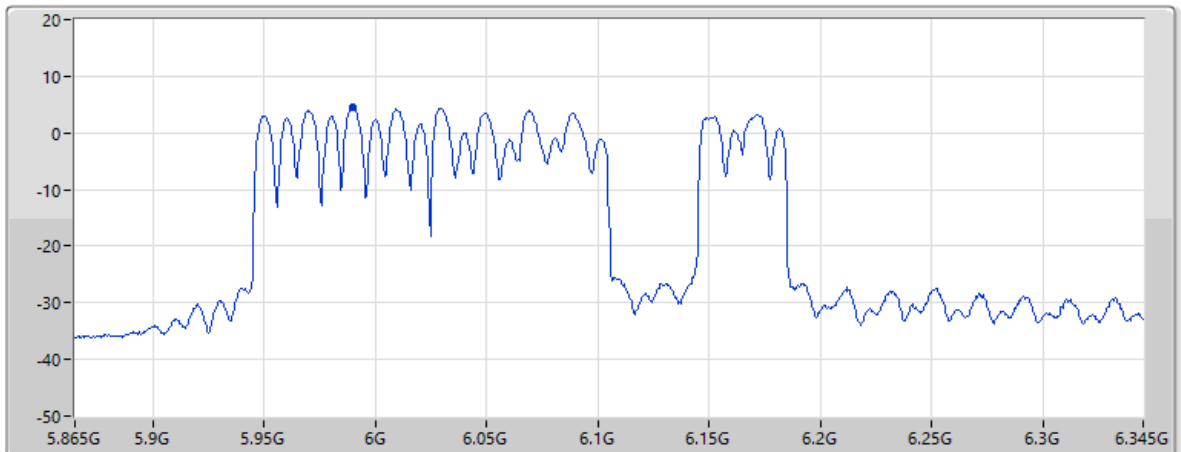

Page 8


Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.65				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.00	11.68	10.18	32.44	57.59

11/04/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996 MRU 1;Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

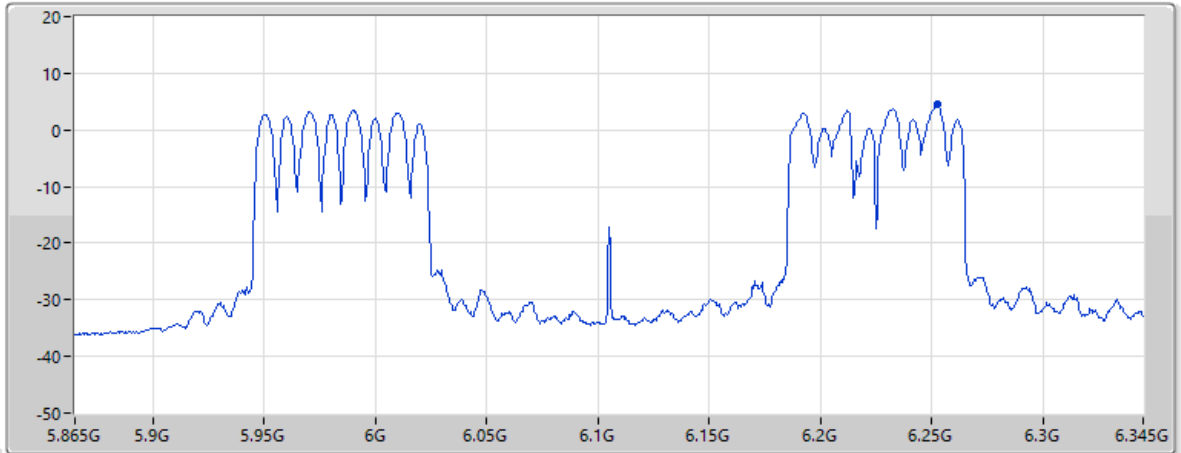


Page 8
Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.52				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.69	11.80	10.46	32.41	57.96

11/04/2026

EIRP PSD;Band:7.0G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 MRU 8;Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

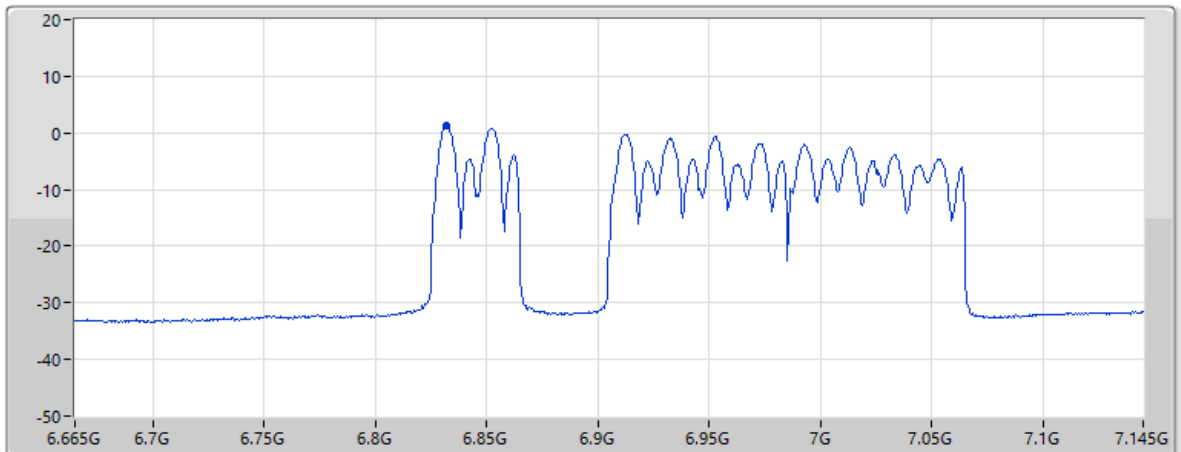

Page 8
Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
1.26				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-24.92	10.96	11.04	32.63	58.73

11/04/2026

EIRP PSD;Band:7.0G;be320;BWch:320MHz;Nss:1,(M0),2xRU996 MRU 1;Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

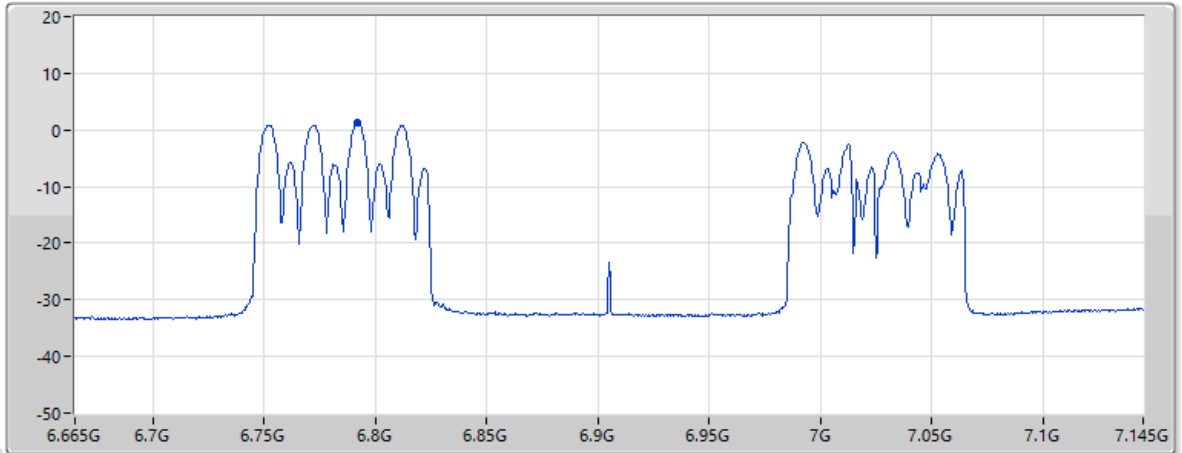

Page 8

Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
1.36		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-24.88	10.88	11.04	32.60	58.68

Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	4.61
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	4.53
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	4.25
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	3.76
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	4.41
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	4.46
6.525-6.875GHz	-
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	1.34
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	1.62
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	1.60
6.875-7.125GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	4.66
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	4.80
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	4.43

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-
5985MHz	Pass	4.61	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-
7025MHz	Pass	4.66	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-
6025MHz	Pass	4.53	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-
6025MHz	Pass	4.25	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-
6985MHz	Pass	4.80	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-
6985MHz	Pass	4.43	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-
6105MHz	Pass	3.76	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-
6105MHz	Pass	4.41	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-
6105MHz	Pass	4.46	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-
6905MHz	Pass	1.34	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-
6905MHz	Pass	1.62	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-
6905MHz	Pass	1.60	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

10/04/2026

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 CP 4;Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

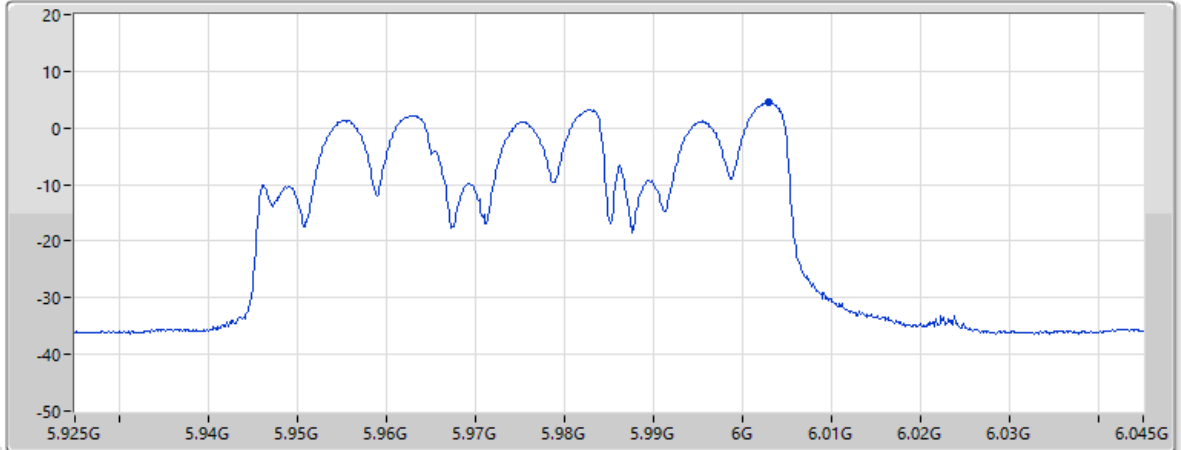

Page 7

Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.61				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.05	11.70	10.19	32.44	57.61

10/04/2026

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 CP 3;Nant:4;Ch:7025MHz;TX

CF Freq
7.025GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

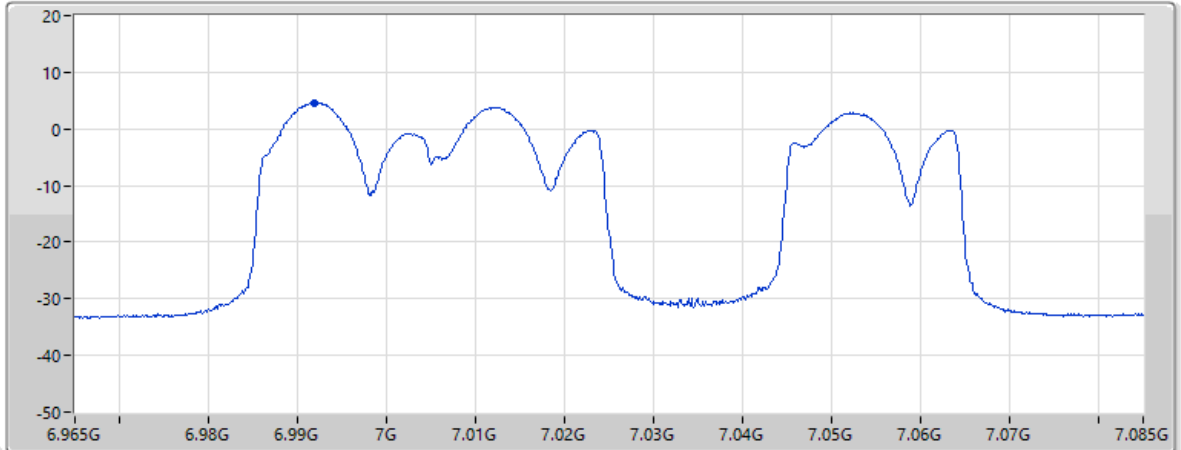

Page 8

Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.66				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.39	11.10	10.96	32.74	58.93

10/04/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484+RU242 CP 8;Nant:4;Ch:6025MHz;TX

CF Freq
6.025GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

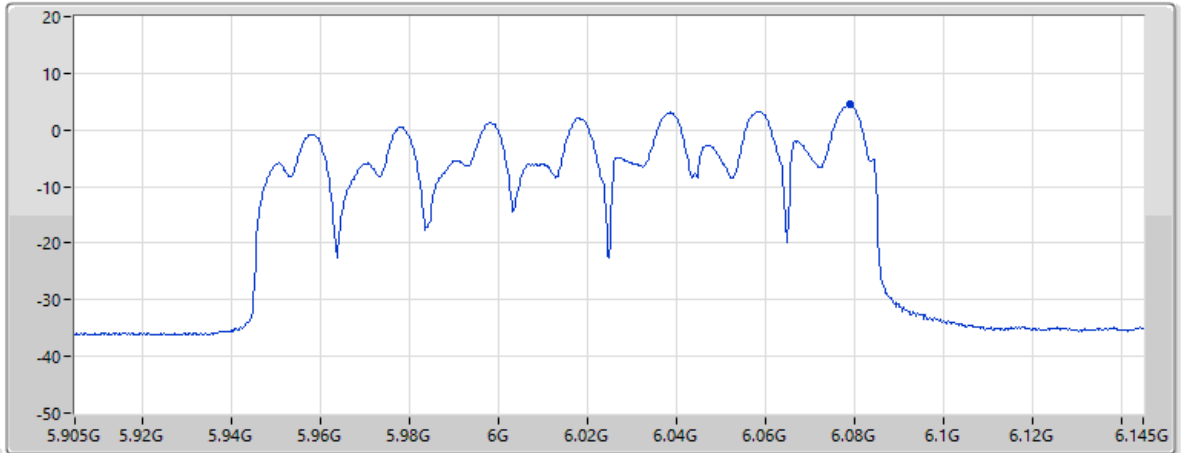

Page 7

Vertical

EIRP PSD (dBm)		$EIRP = Pr + Lp$ [Lp Free Space Path Loss] $Pr = P_{meas} - Gr + Lc - G_{amp}$
4.53		

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)	
-19.27	11.76	10.27	32.43	57.72	

10/04/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 CP 2;Nant:4;Ch:6025MHz;TX

CF Freq
6.025GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

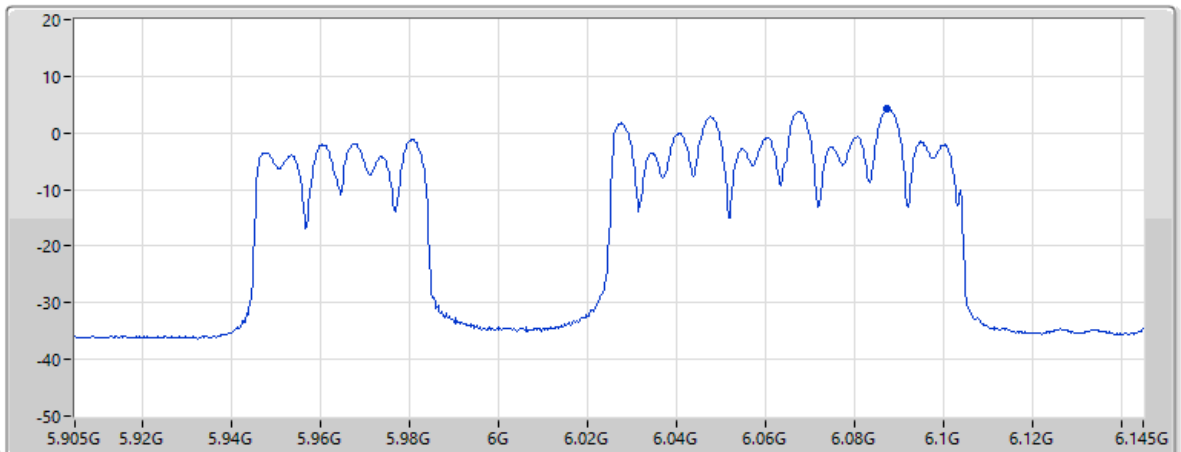

Page 7

Vertical

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]				
4.25		Pr=Pmeas-Gr+Lc-Gamp				

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)	
-19.56	11.77	10.28	32.43	57.73	

10/04/2026

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484+RU242 CP 1;Nant:4;Ch:6985MHz;TX

CF Freq
6.985GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

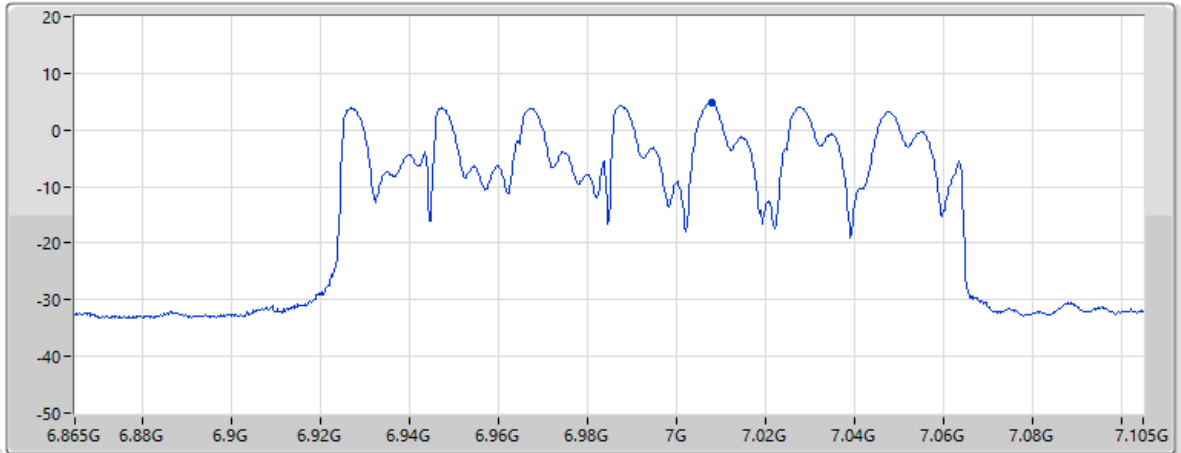

Page 7

Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.8				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.30	11.08	10.98	32.75	58.95

10/04/2026

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 CP 2;Nant:4;Ch:6985MHz;TX

CF Freq
6.985GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

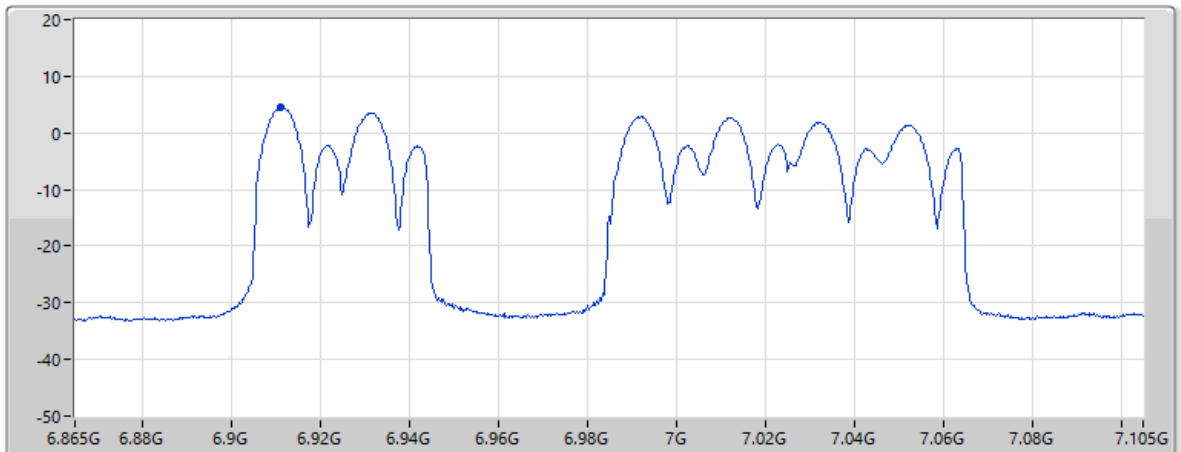

Page 8


Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.43				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.70	11.02	11.00	32.68	58.83

15/04/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996+RU484 CP 3;Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

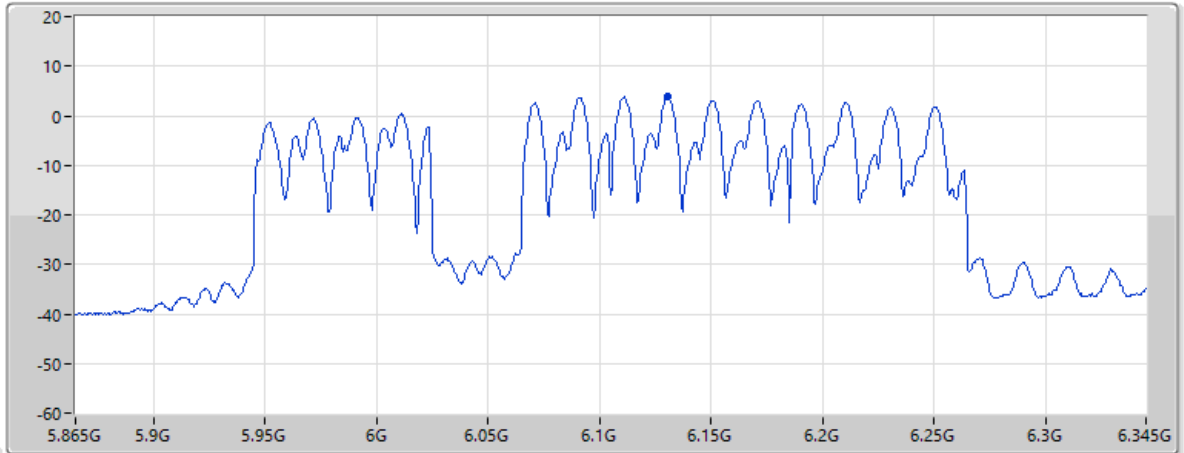


Page 7
Vertical

EIRP PSD (dBm)	3.76	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.67	11.80	9.09	34.65	57.79

10/04/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996 CP 3;Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

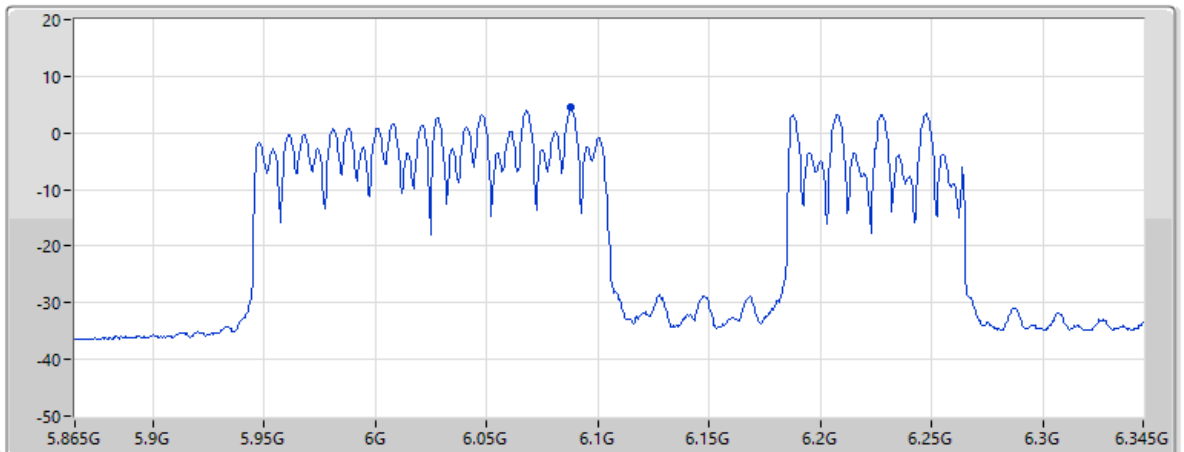


Page 7
Vertical

EIRP PSD (dBm)	4.41	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.39	11.78	10.28	32.43	57.73

10/04/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 CP 3;Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

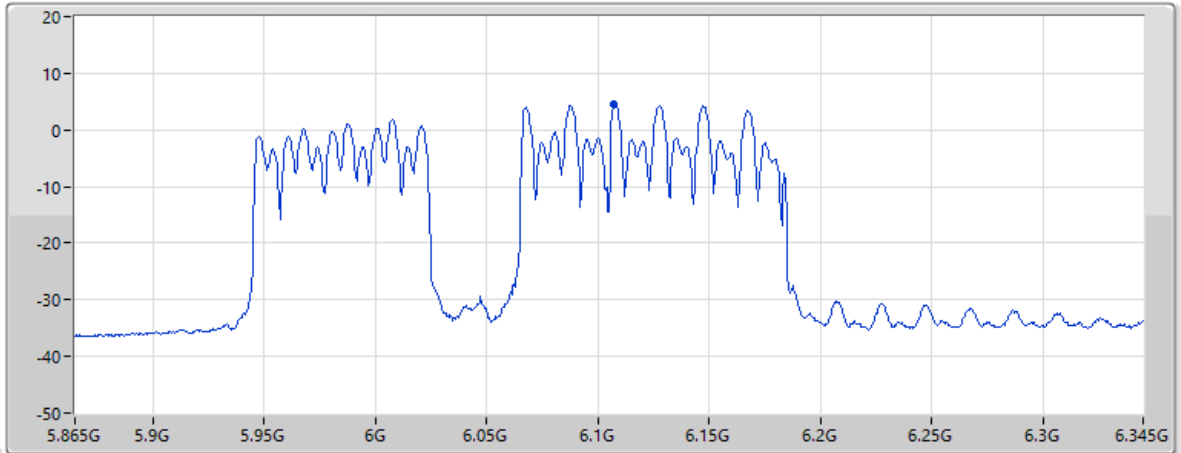


Page 7
Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.46				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.37	11.80	10.30	32.43	57.76

10/04/2026

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0),3xRU996+RU484 CP 4;Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

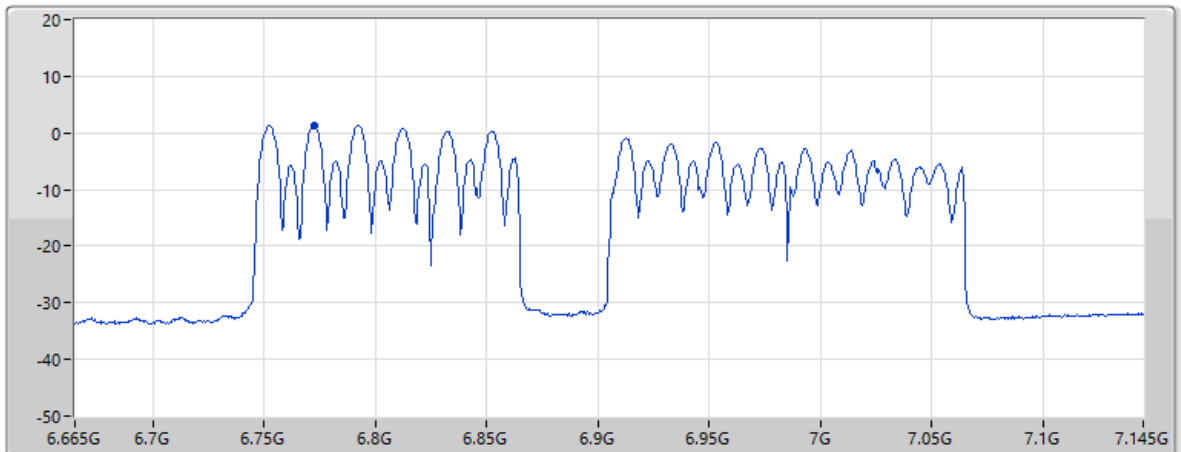

Page 8
Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
1.34				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-24.89	10.85	11.00	32.58	58.66

10/04/2026

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0),3xRU996 CP 3;Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

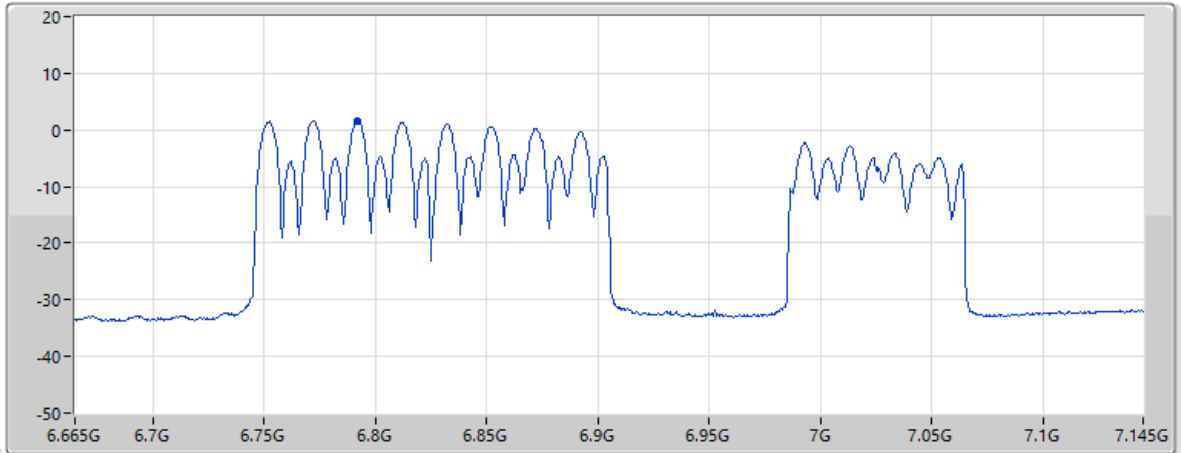

Page 8

Horizontal

EIRP PSD (dBm)	1.62	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-24.62	10.88	11.04	32.60	58.68

10/04/2026

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 CP 9;Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

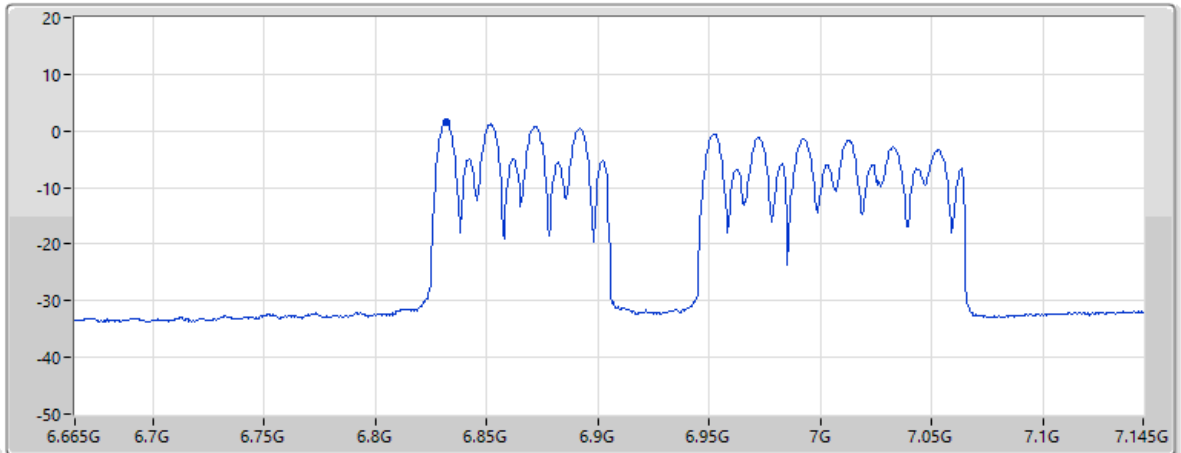

Page 8

Horizontal

EIRP PSD (dBm)	1.6	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-24.58	10.96	11.04	32.63	58.73




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	53.28M	36.59	40.00	-3.41	Vertical

Radiated Emissions below 1GHz_Mode 1

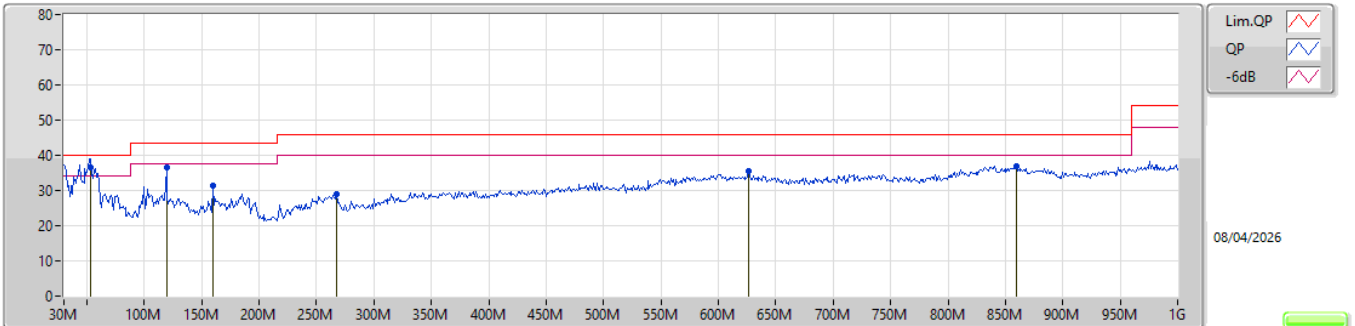

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	53.28M	36.59	40.00	-3.41	-29.99	3	Vertical	360	1.00	"Worst"	66.58	13.38	1.32	44.69		
PK	119.24M	36.66	43.50	-6.84	-24.66	3	Vertical	38	1.25	-	61.32	18.08	1.93	44.67		
PK	159.98M	31.35	43.50	-12.15	-26.51	3	Vertical	239	1.00	-	57.86	15.85	2.23	44.59		
PK	267.65M	28.80	46.00	-17.20	-22.27	3	Vertical	235	1.50	-	51.07	19.23	2.87	44.37		
PK	626.55M	35.36	46.00	-10.64	-14.37	3	Vertical	181	1.00	-	49.73	25.24	4.25	43.86		
PK	859.35M	36.93	46.00	-9.07	-12.09	3	Vertical	201	3.00	-	49.02	26.51	4.96	43.56		

Radiated Emissions below 1GHz_Mode 1

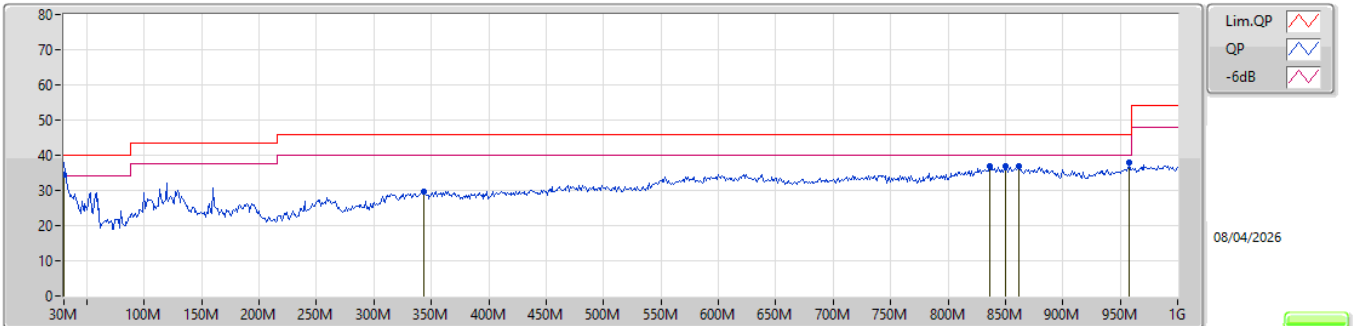

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	30M	34.53	40.00	-5.47	-19.12	3	Horizontal	201	2.00	"Worst"	53.65	24.35	0.96	44.43		
PK	343.31M	29.81	46.00	-16.19	-21.26	3	Horizontal	305	1.00	-	51.07	19.82	3.24	44.32		
PK	836.07M	36.78	46.00	-9.22	-12.37	3	Horizontal	313	1.25	-	49.15	26.33	4.90	43.60		
PK	850.62M	37.02	46.00	-8.98	-12.16	3	Horizontal	360	1.50	-	49.18	26.49	4.93	43.58		
PK	861.29M	36.81	46.00	-9.19	-12.08	3	Horizontal	52	1.25	-	48.89	26.52	4.96	43.56		
PK	958.29M	37.82	46.00	-8.18	-11.05	3	Horizontal	357	2.00	-	48.87	27.26	5.22	43.53		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	AV	7.1255G	68.19	68.20	-0.01	3	Horizontal	76	2.21	BP 1MHz

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

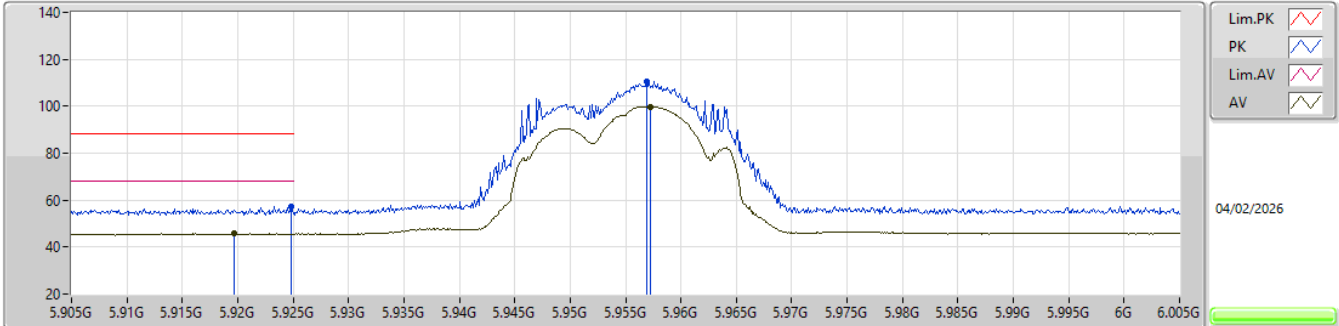


EUT_Y_4TX
Setting 11.5
04-W-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9248G	57.07	88.20	-31.13	59.02	3	Vertical	78	1.80	-	32.40	9.05	43.40			
RMS	5.9197G	45.68	68.20	-22.52	47.63	3	Vertical	78	1.80	-	32.40	9.05	43.40			
PK	5.9569G	110.31	Inf	-Inf	112.19	3	Vertical	78	1.80	-	32.40	9.09	43.37			
RMS	5.9573G	99.89	Inf	-Inf	101.77	3	Vertical	78	1.80	-	32.40	9.09	43.37			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

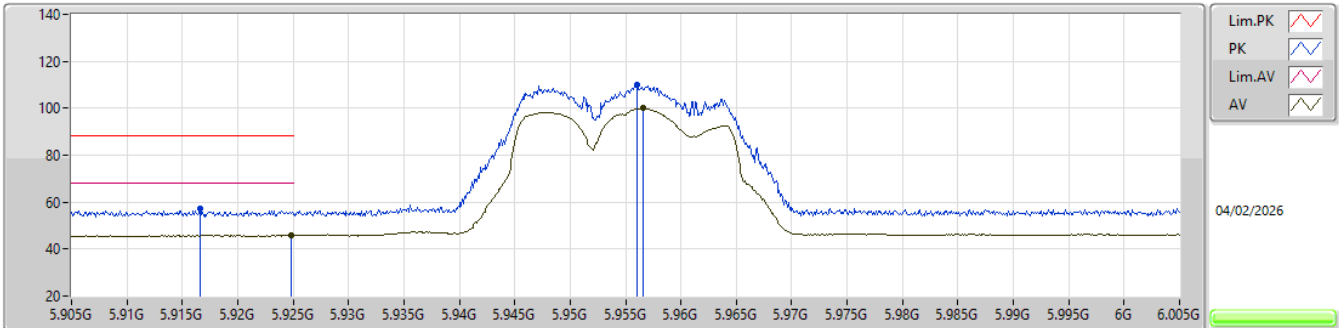


EUT_Y_4TX
Setting 11.5
04-W-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9166G	57.03	88.20	-31.17	59.00	3	Horizontal	76	1.80	-	32.40	9.04	43.41			
RMS	5.9248G	45.86	68.20	-22.34	47.81	3	Horizontal	76	1.80	-	32.40	9.05	43.40			
PK	5.956G	110.20	Inf	-Inf	112.09	3	Horizontal	76	1.80	-	32.40	9.09	43.38			
RMS	5.9566G	99.93	Inf	-Inf	101.81	3	Horizontal	76	1.80	-	32.40	9.09	43.37			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

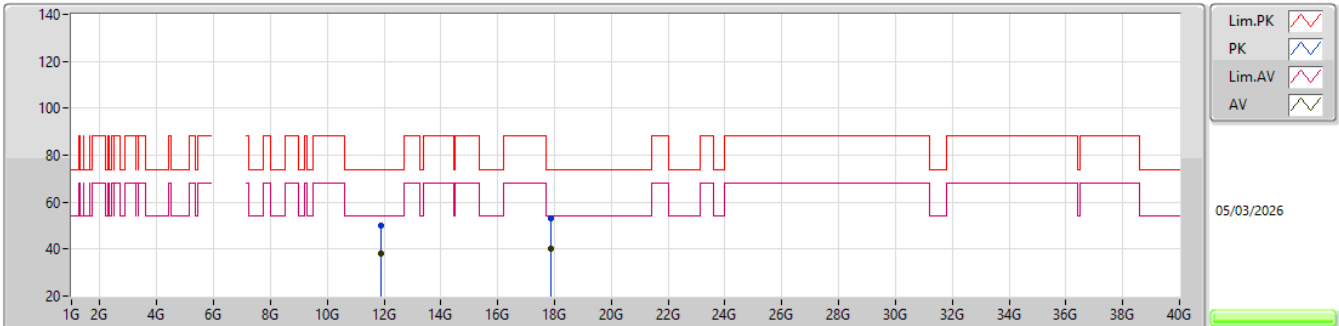


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.90625G	49.82	74.00	-24.18	42.09	3	Vertical	360	1.80	-	38.70	14.97	45.94			
AV	11.91006G	38.14	54.00	-15.86	30.41	3	Vertical	360	1.80	-	38.70	14.97	45.94			
PK	17.85273G	53.19	74.00	-20.81	40.05	3	Vertical	248	1.40	-	42.55	15.87	45.28			
AV	17.87973G	40.31	54.00	-13.69	26.67	3	Vertical	248	1.40	-	43.04	15.88	45.28			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

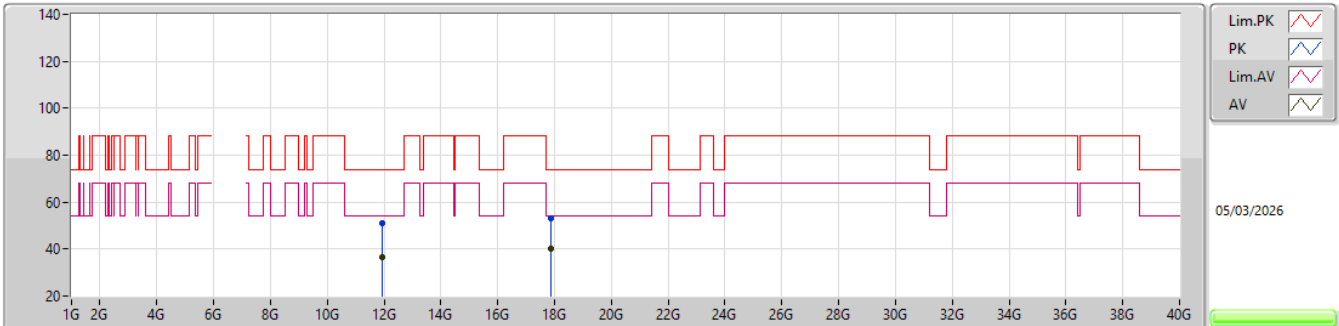


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92182G	50.84	74.00	-23.16	43.10	3	Horizontal	91	2.96	-	38.70	14.98	45.94			
AV	11.91558G	36.55	54.00	-17.45	28.82	3	Horizontal	91	2.96	-	38.70	14.97	45.94			
PK	17.87388G	53.15	74.00	-20.85	39.62	3	Horizontal	179	1.30	-	42.93	15.88	45.28			
AV	17.8767G	40.30	54.00	-13.70	26.72	3	Horizontal	179	1.30	-	42.98	15.88	45.28			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

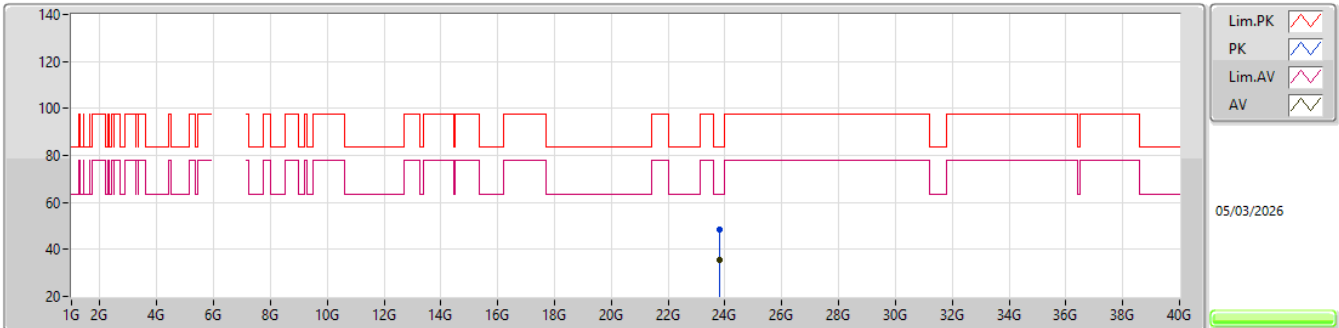EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82609G	48.37	83.54	-35.17	39.43	1	Vertical	26	2.18	-	38.90	17.94	47.90			
AV	23.80803G	35.43	63.54	-28.11	26.48	1	Vertical	26	2.18	-	38.90	17.95	47.90			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

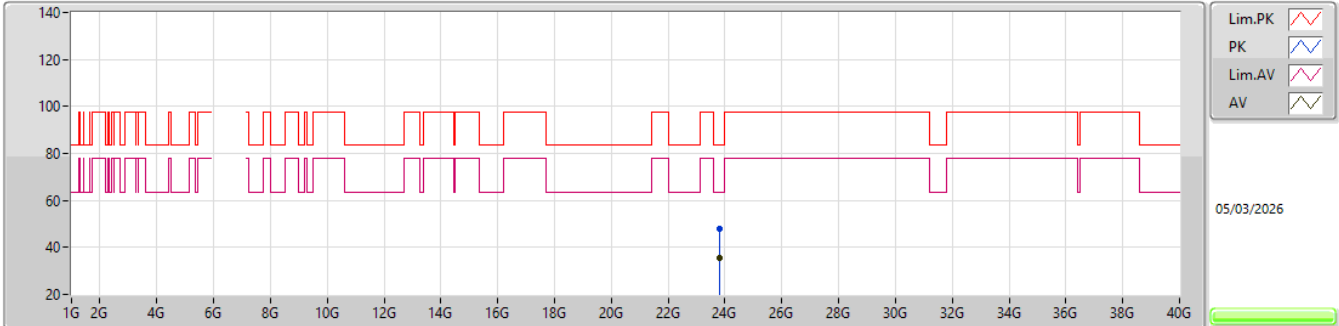


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82966G	47.92	83.54	-35.62	38.98	1	Horizontal	242	1.44	-	38.90	17.94	47.90			
AV	23.8074G	35.38	63.54	-28.16	26.43	1	Horizontal	242	1.44	-	38.90	17.95	47.90			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6195MHz_TX

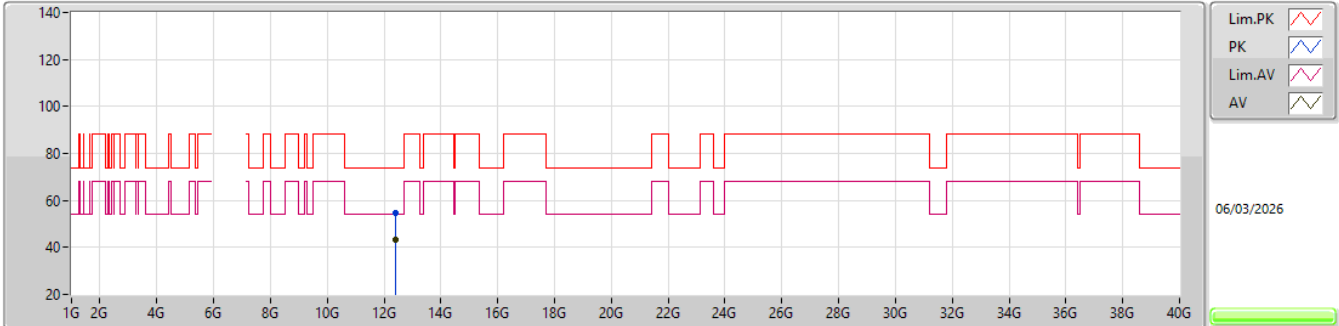


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40053G	54.63	74.00	-19.37	46.52	3	Vertical	318	1.35	-	38.60	15.07	45.56			
AV	12.40446G	43.25	54.00	-10.75	35.13	3	Vertical	318	1.35	-	38.61	15.07	45.56			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6195MHz_TX

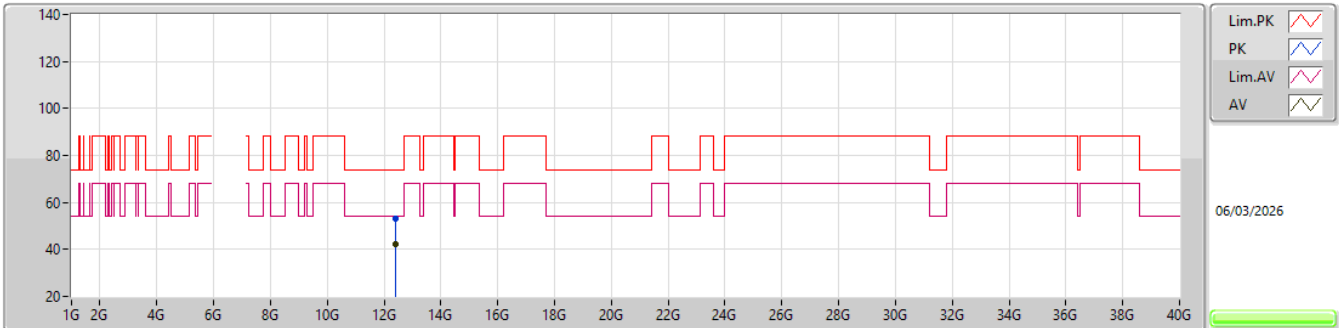EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39759G	53.02	74.00	-21.98	43.91	3	Horizontal	94	2.30	-	38.60	15.07	45.56			
AV	12.405G	42.33	54.00	-11.67	34.21	3	Horizontal	94	2.30	-	38.61	15.07	45.56			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6195MHz_TX

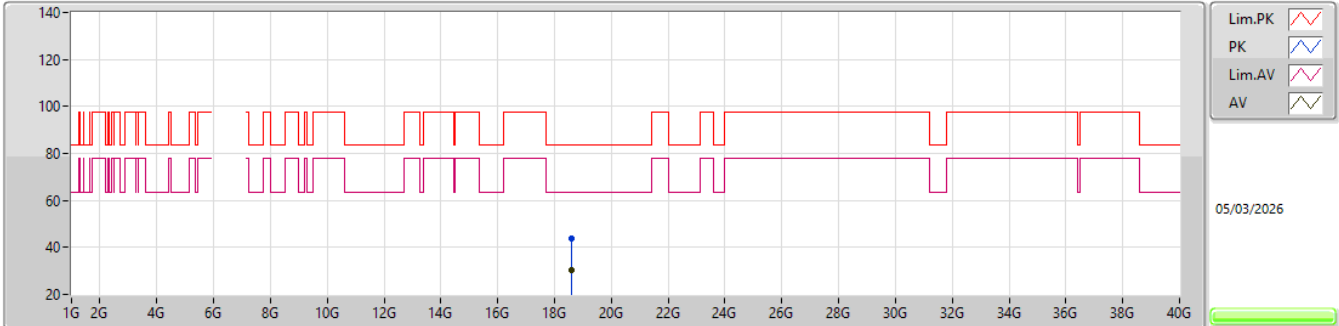


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58035G	43.95	83.54	-39.59	38.84	1	Vertical	165	2.19	-	37.62	16.14	48.65			
AV	18.59712G	30.54	63.54	-33.00	25.36	1	Vertical	165	2.19	-	37.69	16.15	48.66			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6195MHz_TX

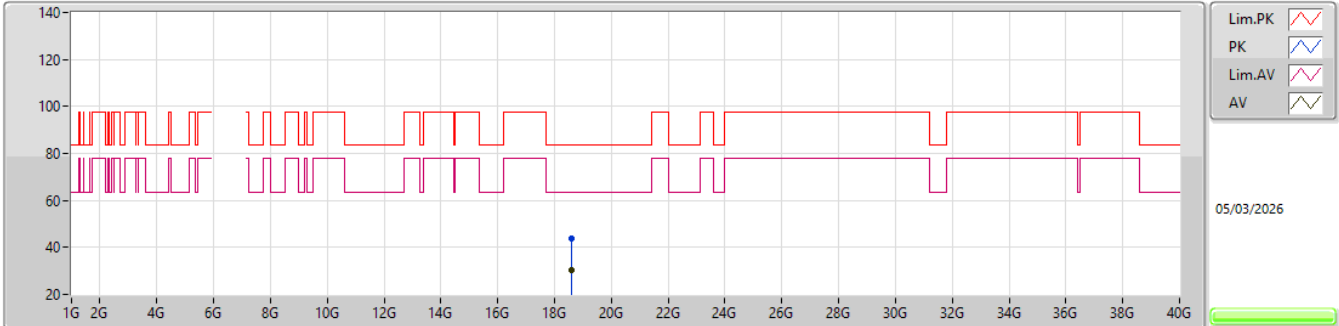


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5879G	43.66	83.54	-39.88	38.52	1	Horizontal	342	2.89	-	37.65	16.14	48.65			
AV	18.58012G	30.40	63.54	-33.14	25.29	1	Horizontal	342	2.89	-	37.62	16.14	48.65			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6415MHz_TX

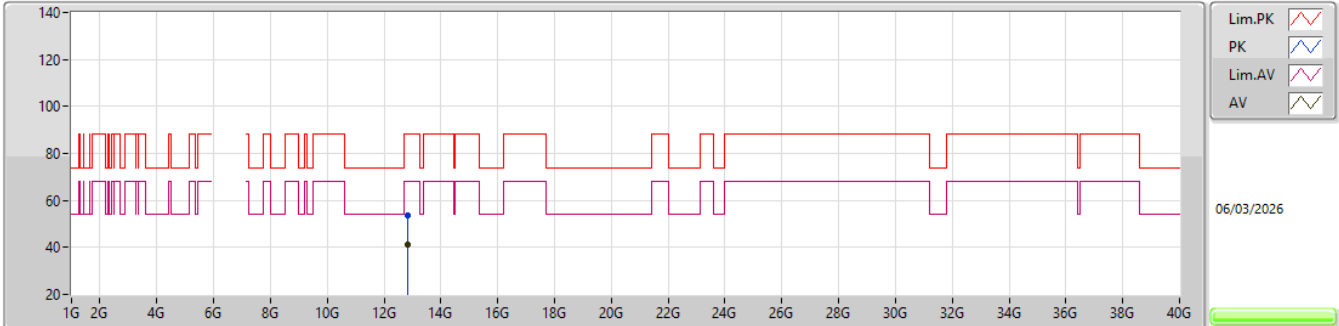


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83264G	53.60	88.20	-34.60	44.27	3	Vertical	52	2.42	-	39.97	15.13	45.77			
RMS	12.82076G	41.24	68.20	-26.96	31.93	3	Vertical	52	2.42	-	39.94	15.13	45.76			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6415MHz_TX

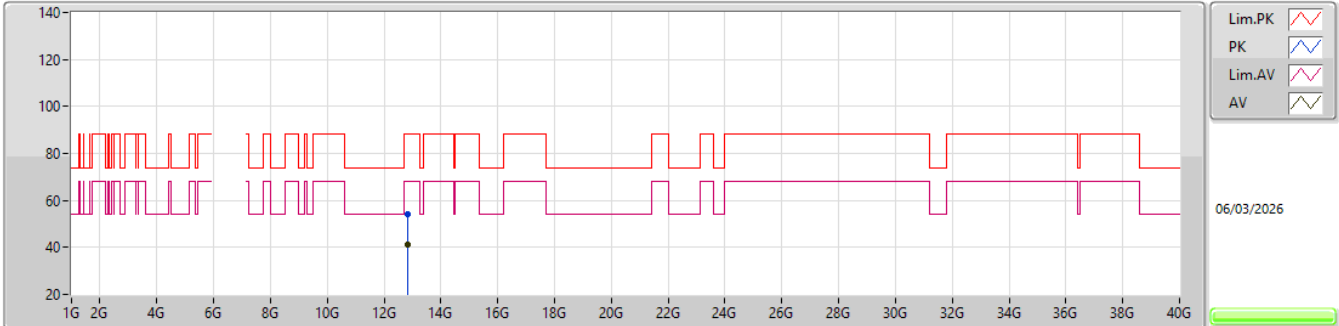


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83117G	53.90	88.20	-44.30	34.57	3	Horizontal	83	1.38	-	39.96	15.13	45.76			
RMS	12.82031G	41.31	68.20	-36.89	21.99	3	Horizontal	83	1.38	-	39.94	15.13	45.75			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6415MHz_TX

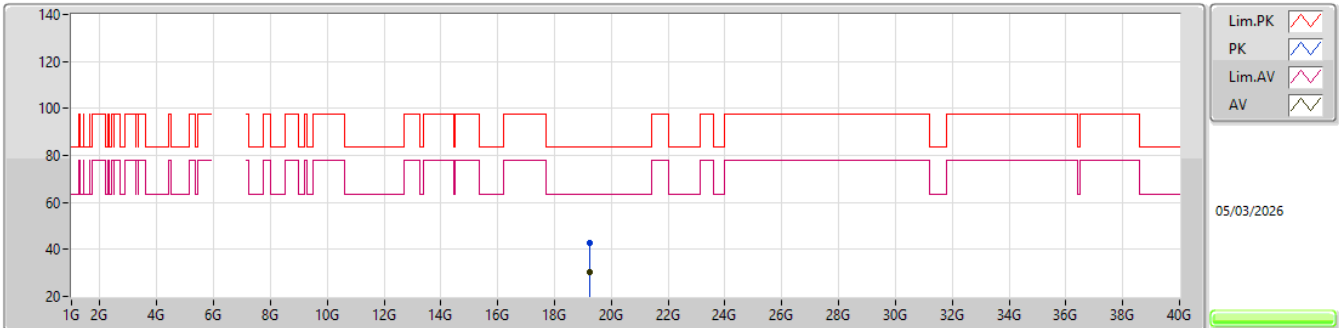EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24683G	42.96	83.54	-40.58	37.42	1	Vertical	254	1.75	-	37.88	16.51	48.85			
AV	19.24394G	30.27	63.54	-33.27	24.75	1	Vertical	254	1.75	-	37.86	16.51	48.85			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6415MHz_TX

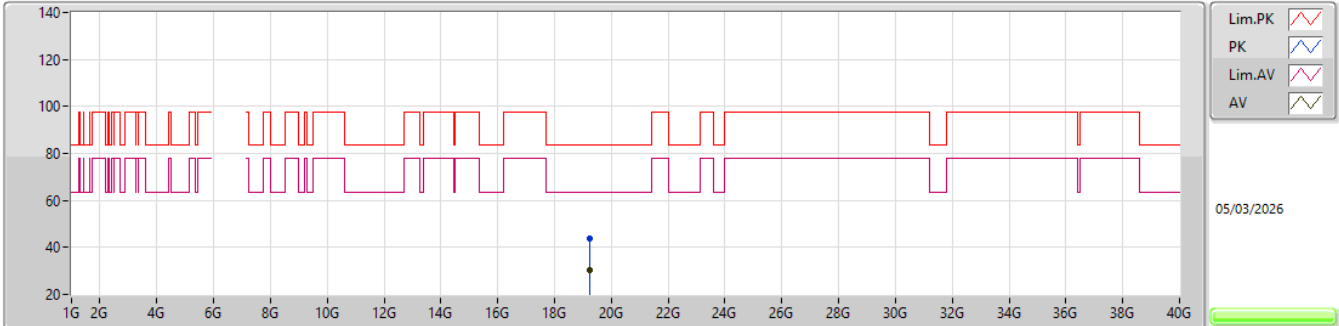


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24546G	43.84	83.54	-39.70	38.31	1	Horizontal	54	2.10	-	37.87	16.51	48.85			
AV	19.24459G	30.23	63.54	-33.31	24.70	1	Horizontal	54	2.10	-	37.87	16.51	48.85			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6435MHz_TX

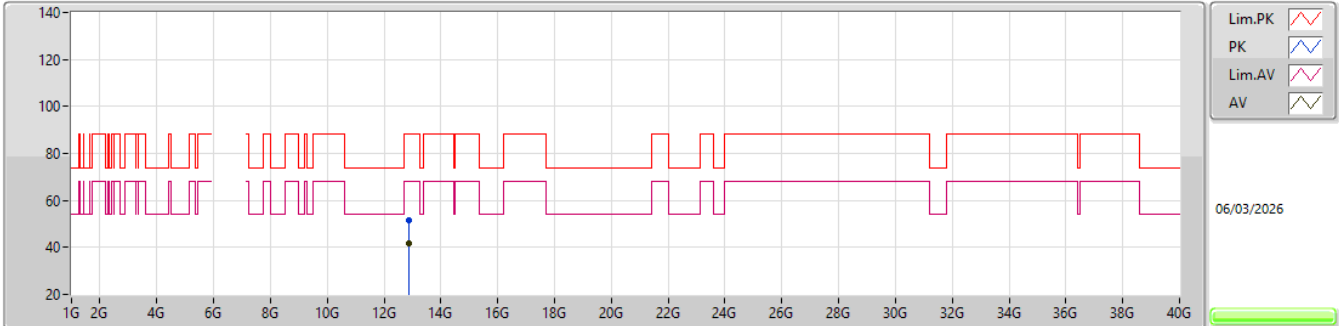


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88464G	51.56	88.20	-36.64	42.23	3	Vertical	179	1.25	-	40.00	15.14	45.81			
RMS	12.88497G	41.48	68.20	-26.72	32.15	3	Vertical	179	1.25	-	40.00	15.14	45.81			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6435MHz_TX

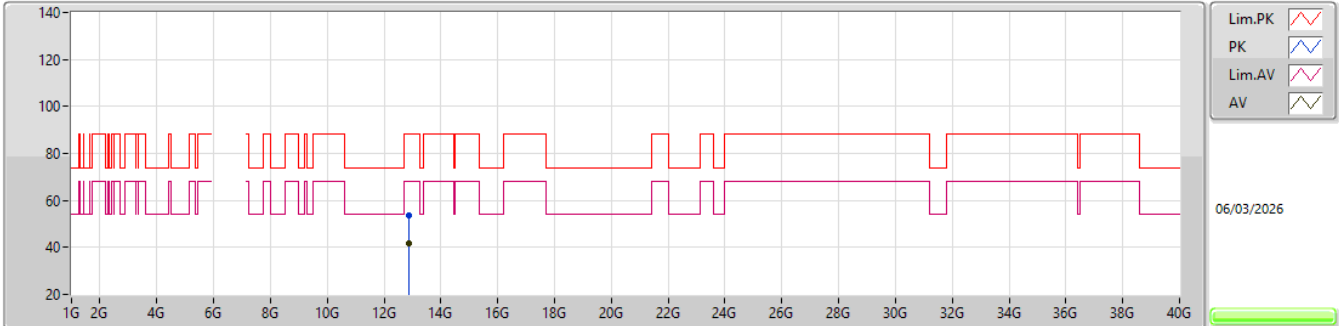


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88233G	53.62	88.20	-34.58	44.30	3	Horizontal	106	1.84	-	40.00	15.13	45.81			
RMS	12.88446G	41.53	68.20	-26.67	32.21	3	Horizontal	106	1.84	-	40.00	15.13	45.81			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6435MHz_TX

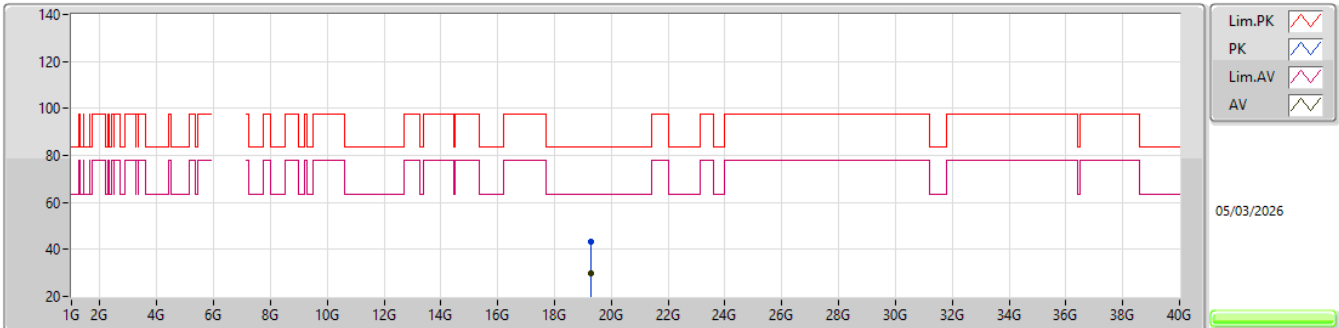


EUT Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.30347G	43.51	83.54	-40.03	38.22	1	Vertical	263	1.91	-	37.61	16.52	48.84			
AV	19.30345G	29.77	63.54	-33.77	24.48	1	Vertical	263	1.91	-	37.61	16.52	48.84			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6435MHz_TX

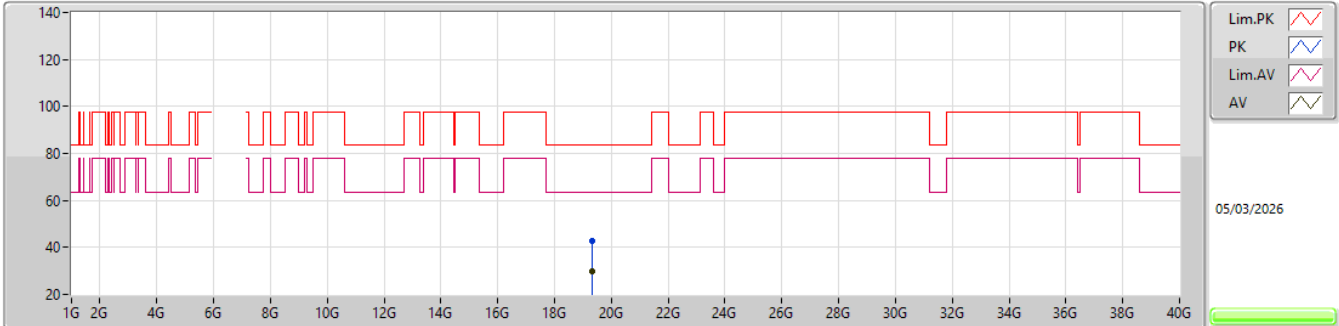


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.30774G	42.69	83.54	-40.85	37.39	1	Horizontal	155	1.51	-	37.62	16.52	48.84			
AV	19.30631G	29.91	63.54	-33.63	24.62	1	Horizontal	155	1.51	-	37.61	16.52	48.84			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6475MHz_TX

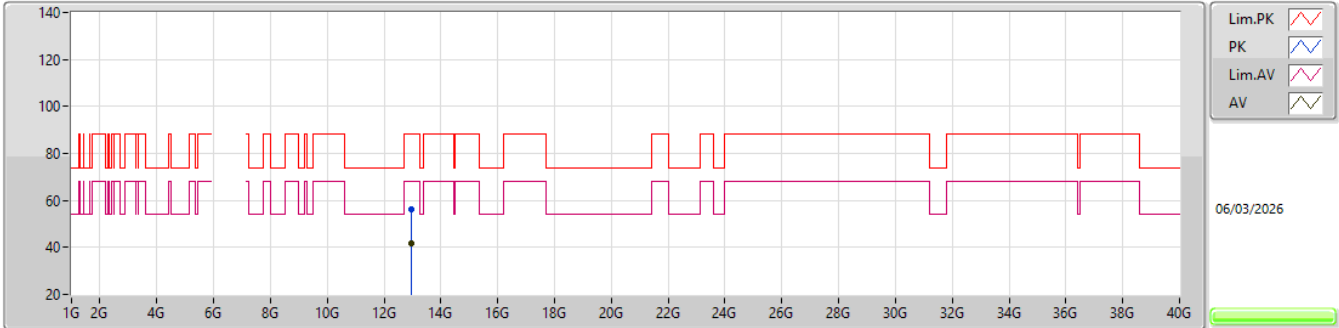


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.95804G	56.37	88.20	-31.83	46.93	3	Vertical	91	1.85	-	40.18	15.14	45.88			
RMS	12.96149G	41.78	68.20	-26.42	32.34	3	Vertical	91	1.85	-	40.18	15.14	45.88			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6475MHz_TX

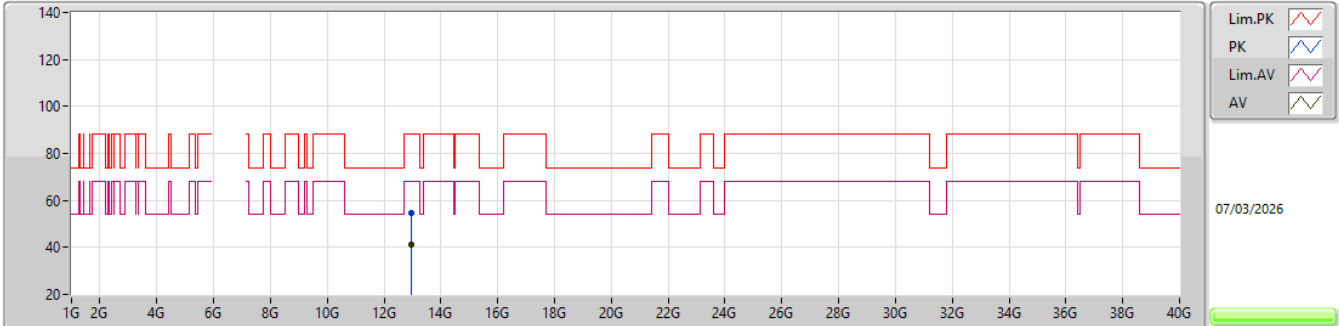


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.94712G	54.65	88.20	-33.55	45.19	3	Horizontal	290	1.28	-	40.19	15.14	45.87			
RMS	12.96404G	41.44	68.20	-26.76	32.01	3	Horizontal	290	1.28	-	40.17	15.15	45.89			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6475MHz_TX

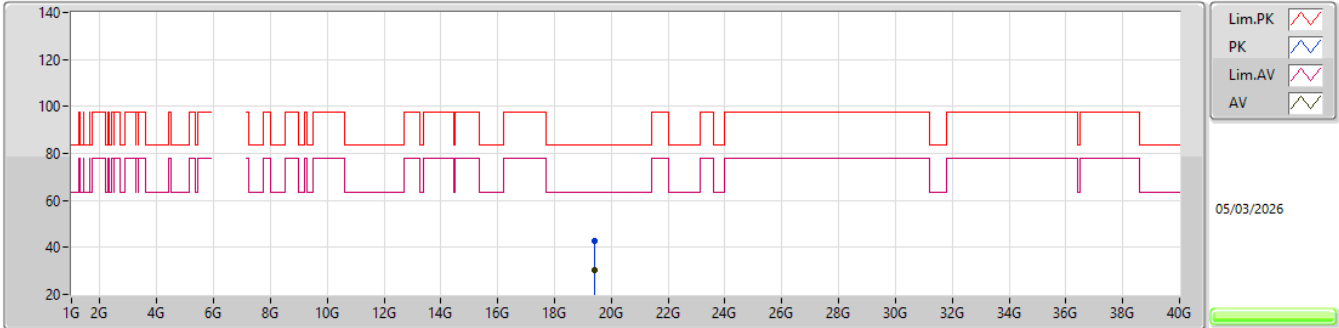


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42853G	42.95	83.54	-40.59	37.59	1	Vertical	287	2.10	-	37.64	16.53	48.81			
AV	19.42727G	30.11	63.54	-33.43	24.74	1	Vertical	287	2.10	-	37.65	16.53	48.81			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6475MHz_TX

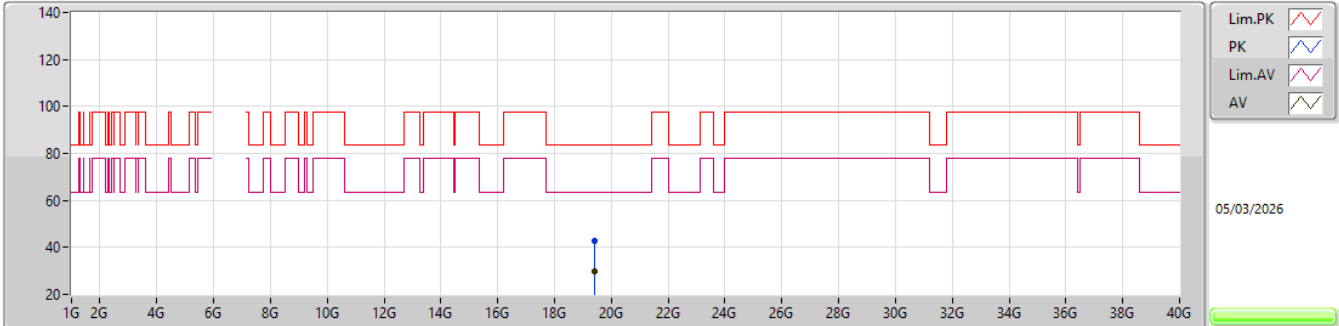


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42443G	42.99	83.54	-40.55	37.63	1	Horizontal	296	2.54	-	37.65	16.53	48.82			
AV	19.42081G	30.06	63.54	-33.48	24.69	1	Horizontal	296	2.54	-	37.66	16.53	48.82			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6515MHz_TX

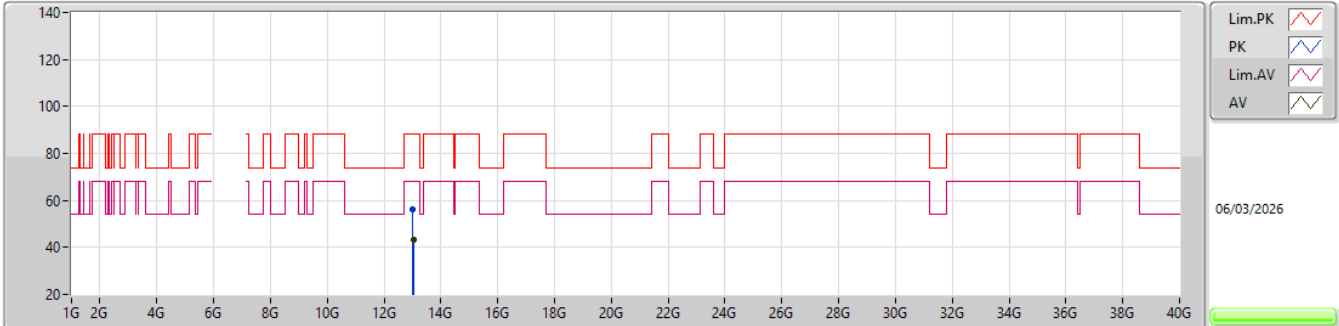


EUT_V_4TX
Setting 13
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.02271G	56.00	88.20	-32.20	46.72	3	Vertical	181	1.95	-	40.01	15.15	45.88			
RMS	13.03726G	43.05	68.20	-25.15	33.80	3	Vertical	181	1.95	-	39.95	15.15	45.85			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6515MHz_TX

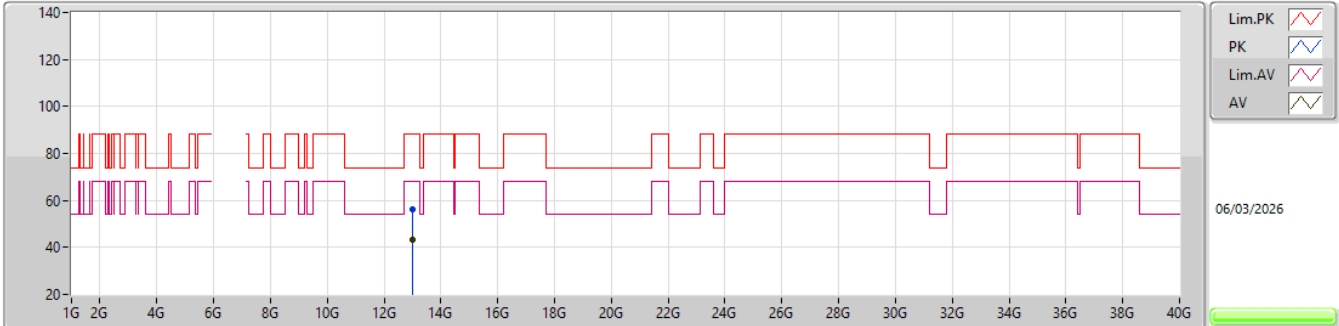


EUT_V_4TX
Setting 13
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.01935G	56.22	88.20	-31.98	46.93	3	Horizontal	299	1.19	-	40.02	15.15	45.88			
RMS	13.01632G	43.17	68.20	-25.03	33.88	3	Horizontal	299	1.19	-	40.03	15.15	45.89			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6515MHz_TX

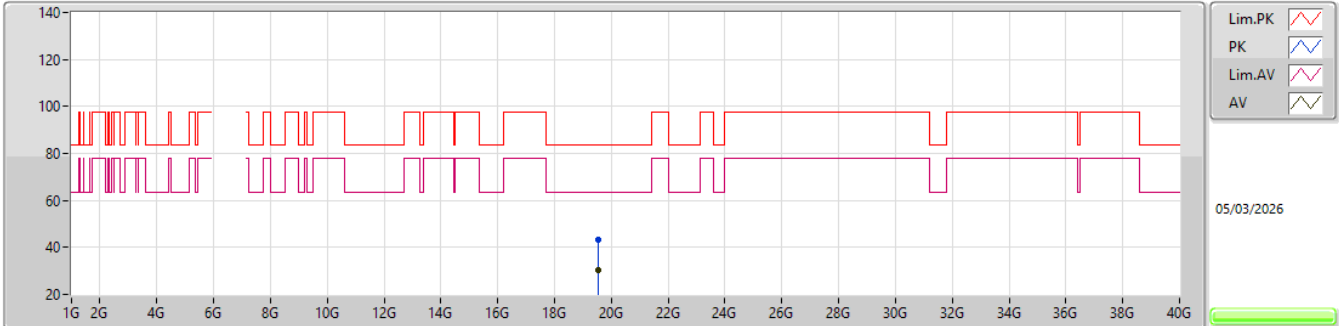


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54817G	43.08	83.54	-40.46	37.75	1	Vertical	24	2.76	-	37.60	16.55	48.82			
AV	19.54934G	30.49	63.54	-33.05	25.16	1	Vertical	24	2.76	-	37.60	16.55	48.82			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6515MHz_TX

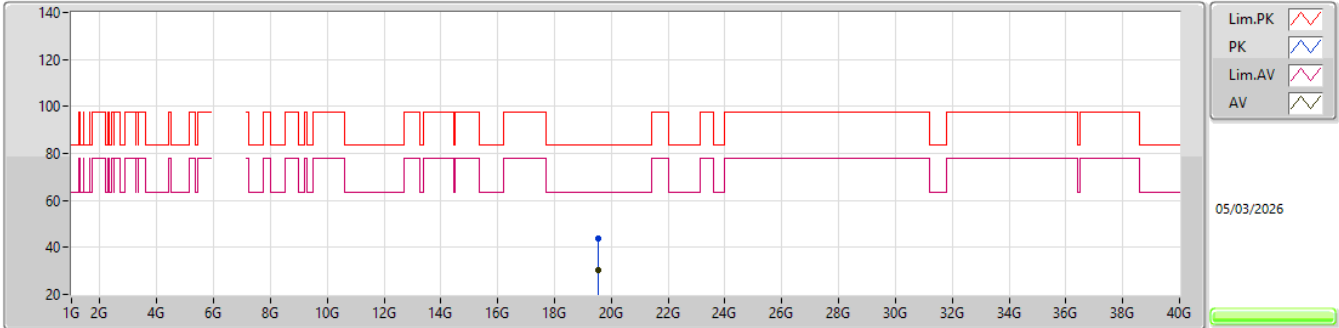


EUT V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	19.54886G	43.61	83.54	-39.93	38.28	1	Horizontal	355	2.65	-	37.60	16.55	48.82				
AV	19.54779G	30.49	63.54	-33.05	25.16	1	Horizontal	355	2.65	-	37.60	16.55	48.82				

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6535MHz_TX

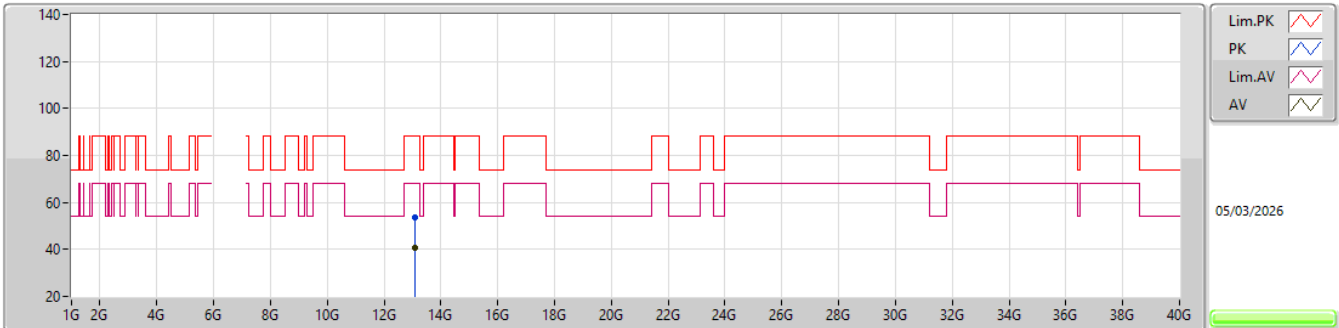


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.07252G	53.67	88.20	-34.53	44.40	3	Vertical	18	2.80	-	39.90	15.16	45.79			
RMS	13.07135G	40.49	68.20	-27.71	31.22	3	Vertical	18	2.80	-	39.90	15.16	45.79			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6535MHz_TX

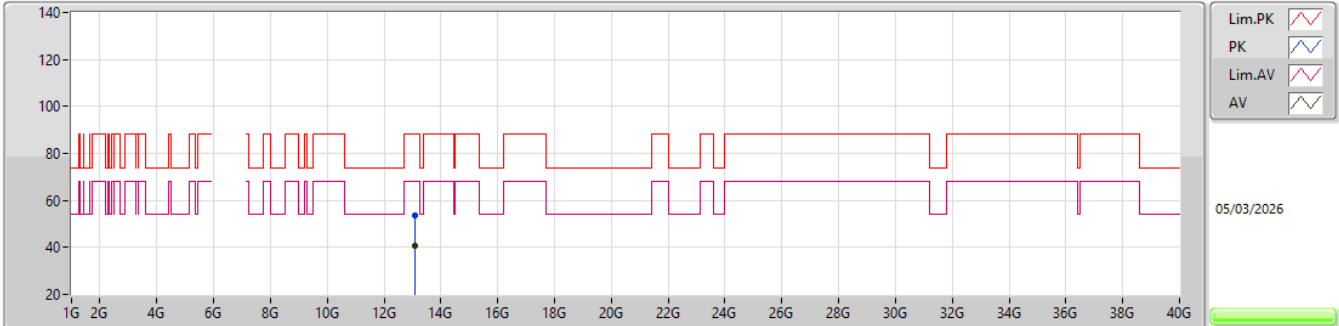


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.07081G	53.83	88.20	-34.37	44.56	3	Horizontal	341	1.80	-	39.90	15.16	45.79			
RMS	13.07057G	40.72	68.20	-27.48	31.45	3	Horizontal	341	1.80	-	39.90	15.16	45.79			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6535MHz_TX

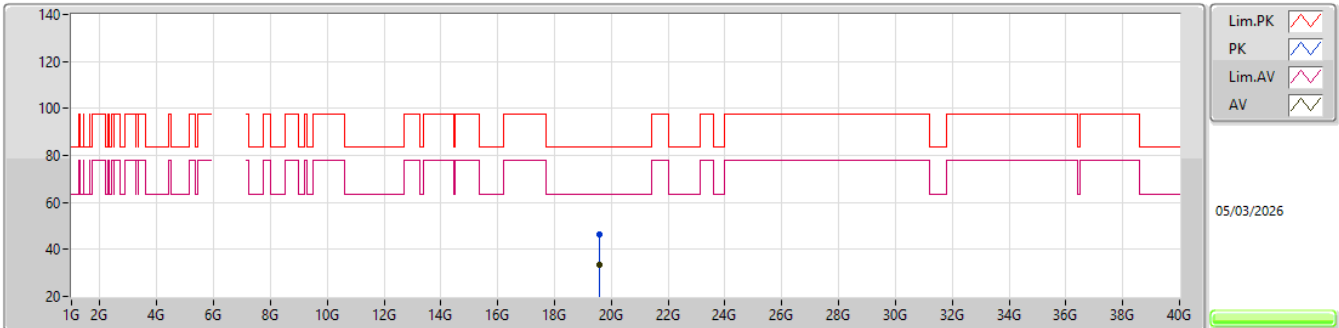


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60229G	46.53	83.54	-37.01	41.21	1	Vertical	25	1.99	-	37.60	16.56	48.84			
AV	19.60031G	33.26	63.54	-30.28	27.94	1	Vertical	25	1.99	-	37.60	16.56	48.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6535MHz_TX

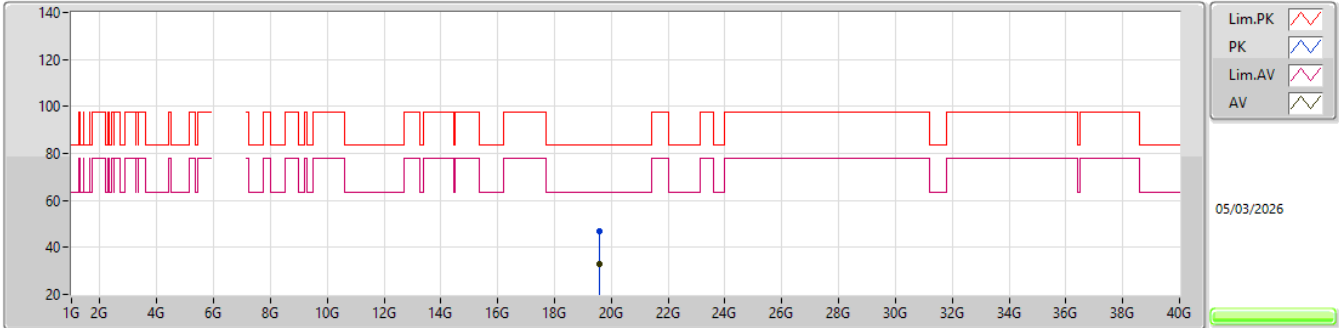


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60071G	46.71	83.54	-36.83	41.39	1	Horizontal	109	2.29	-	37.60	16.56	48.84			
AV	19.60014G	33.17	63.54	-30.37	27.85	1	Horizontal	109	2.29	-	37.60	16.56	48.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6695MHz_TX

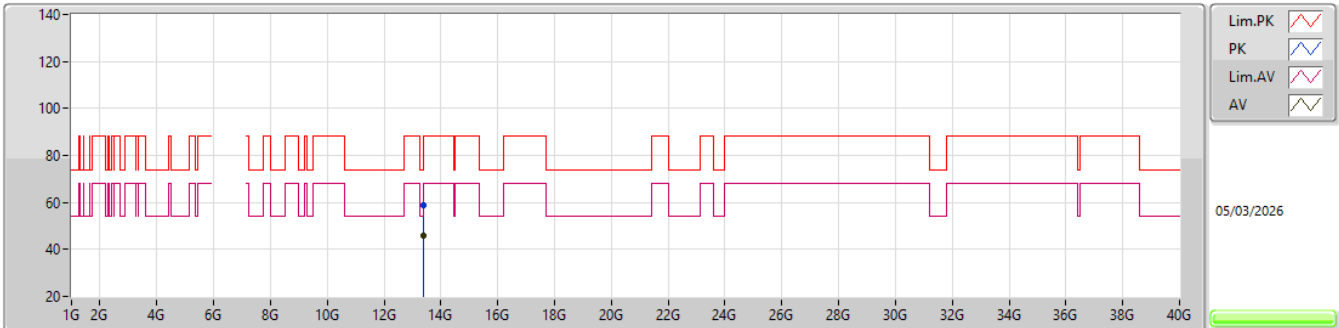


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39489G	58.58	74.00	-15.42	48.18	3	Vertical	4	1.80	-	40.40	15.20	45.20			
AV	13.39468G	45.87	54.00	-8.13	35.47	3	Vertical	4	1.80	-	40.40	15.20	45.20			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6695MHz_TX

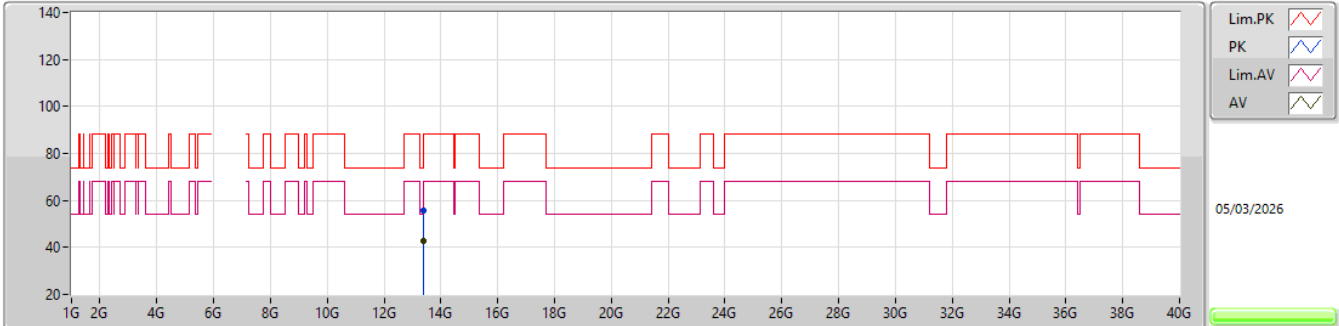


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39489G	55.67	74.00	-18.33	45.27	3	Horizontal	359	1.49	-	40.40	15.20	45.20			
AV	13.3846G	42.80	54.00	-11.20	32.42	3	Horizontal	359	1.49	-	40.40	15.20	45.22			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6695MHz_TX

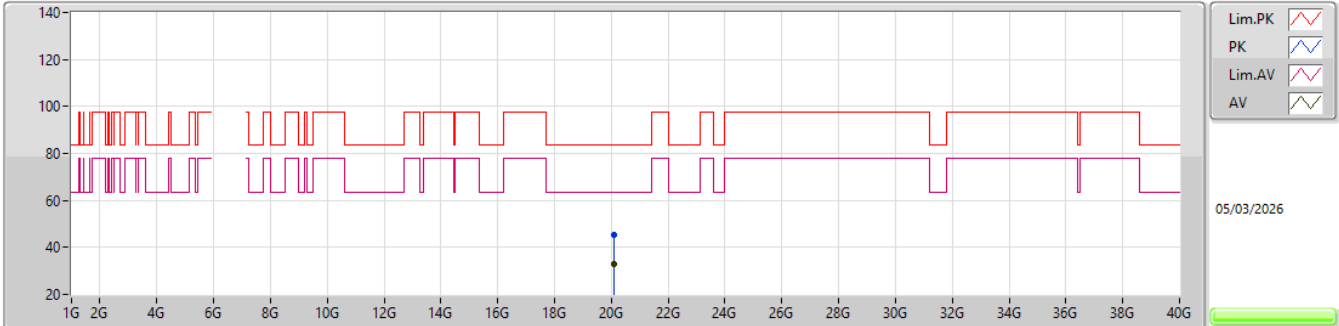


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08452G	45.52	83.54	-38.02	40.53	1	Vertical	195	2.33	-	37.27	16.70	48.98			
AV	20.08433G	32.72	63.54	-30.82	27.73	1	Vertical	195	2.33	-	37.27	16.70	48.98			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6695MHz_TX

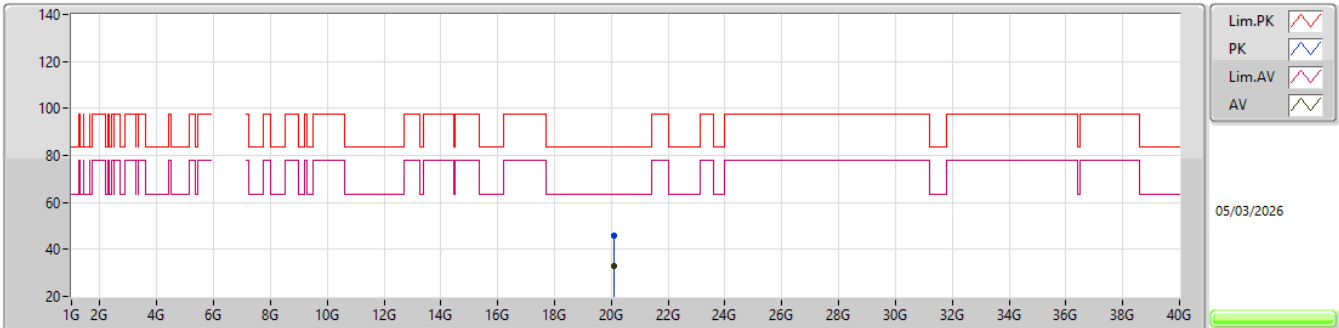


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08844G	45.66	83.54	-37.88	40.66	1	Horizontal	34	1.48	-	37.28	16.70	48.98			
AV	20.08393G	32.74	63.54	-30.80	27.75	1	Horizontal	34	1.48	-	37.27	16.70	48.98			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

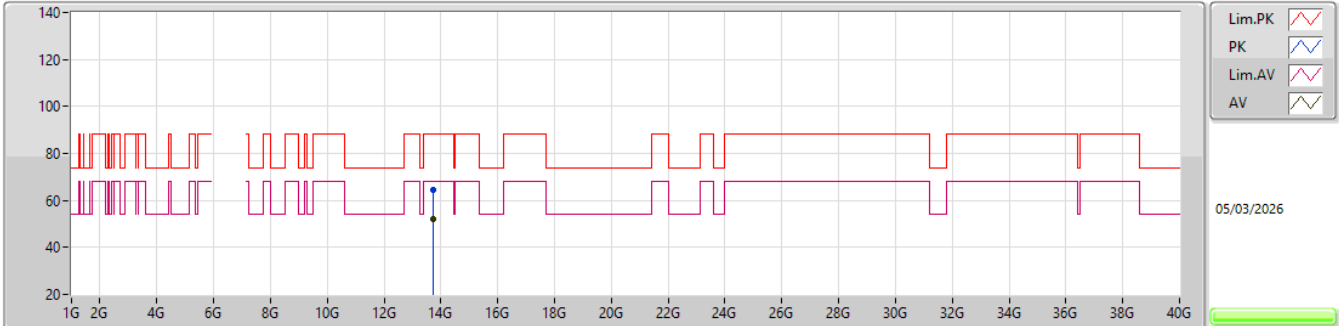


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.71399G	64.42	88.20	-23.78	53.57	3	Vertical	8	1.80	-	40.67	15.24	45.06			
RMS	13.71435G	52.19	68.20	-16.01	41.34	3	Vertical	8	1.80	-	40.67	15.24	45.06			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

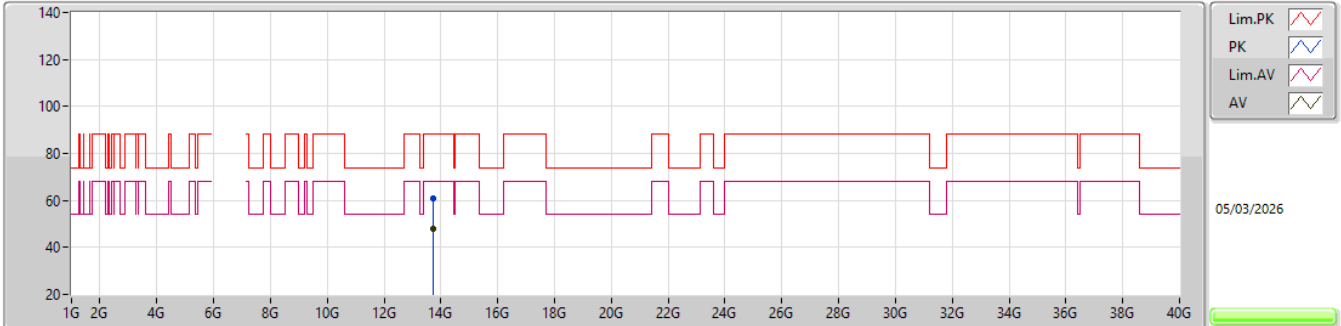


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.71105G	60.84	88.20	-27.36	49.98	3	Horizontal	16	2.15	-	40.68	15.24	45.06			
RMS	13.71063G	48.04	68.20	-20.16	37.18	3	Horizontal	16	2.15	-	40.68	15.24	45.06			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

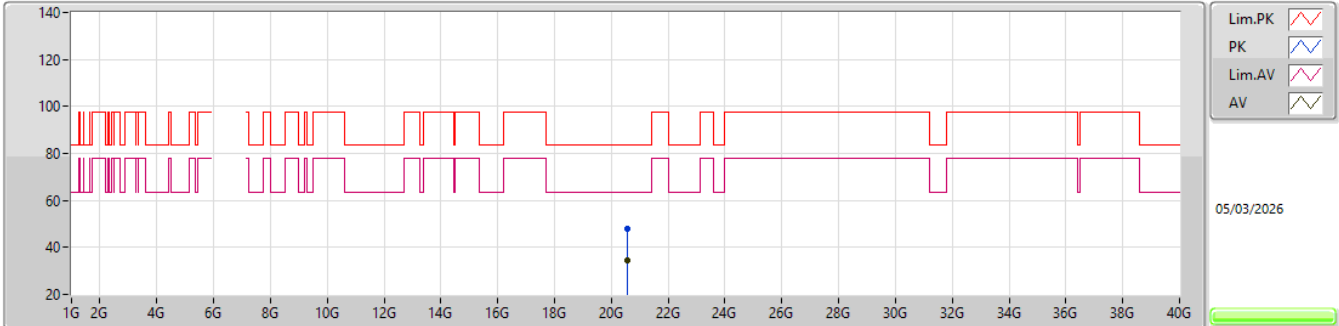


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.56391G	48.06	83.54	-35.48	42.27	1	Vertical	134	2.02	-	37.56	17.13	48.90			
AV	20.56844G	34.58	63.54	-28.96	28.77	1	Vertical	134	2.02	-	37.57	17.14	48.90			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

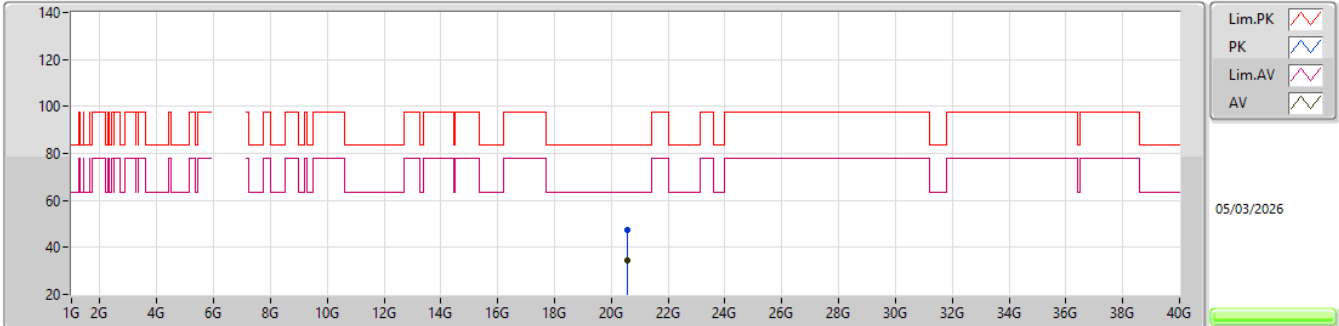


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.5684G	47.28	83.54	-36.26	41.47	1	Horizontal	77	1.25	-	37.57	17.14	48.90			
AV	20.56303G	34.62	63.54	-28.92	28.84	1	Horizontal	77	1.25	-	37.55	17.13	48.90			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6875MHz_TX

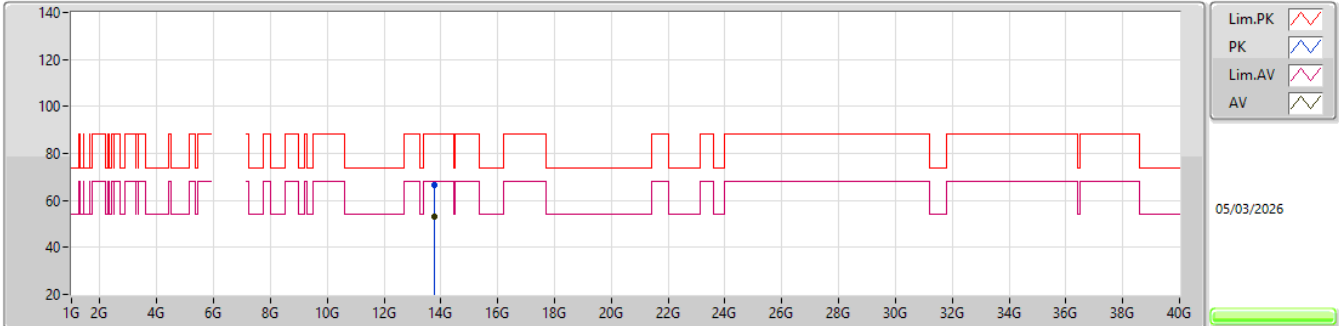


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7545G	66.65	88.20	-21.55	55.87	3	Vertical	7	1.79	-	40.60	15.25	45.07			
RMS	13.75396G	53.12	68.20	-15.08	42.34	3	Vertical	7	1.79	-	40.60	15.25	45.07			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6875MHz_TX

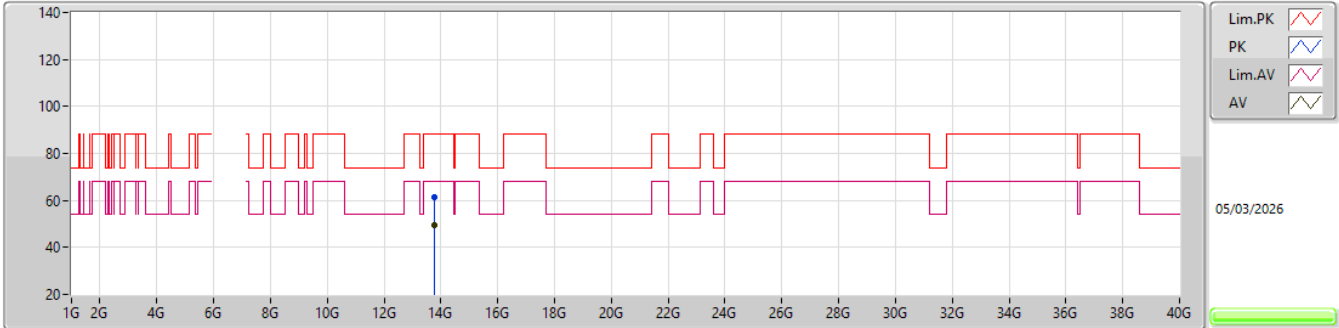


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.75288G	61.63	88.20	-26.57	50.85	3	Horizontal	301	2.84	-	40.60	15.25	45.07			
RMS	13.75279G	49.38	68.20	-18.82	38.60	3	Horizontal	301	2.84	-	40.60	15.25	45.07			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6875MHz_TX

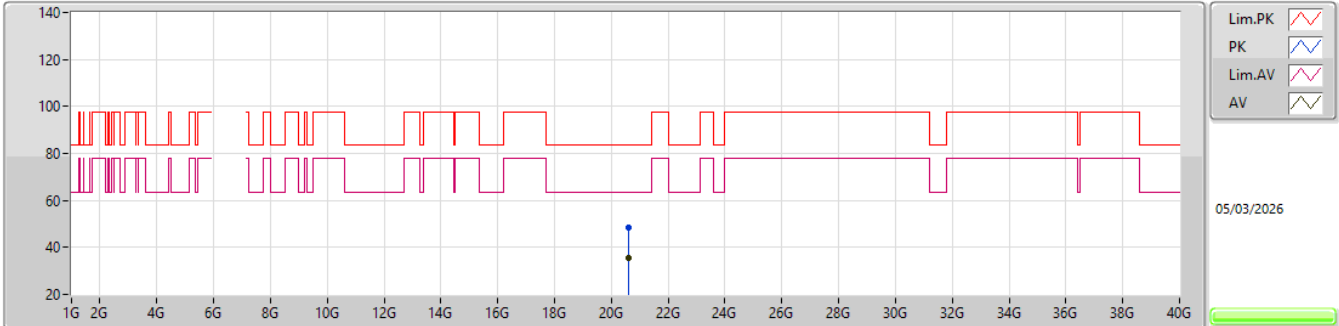


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.62519G	48.38	83.54	-35.16	42.44	1	Vertical	210	2.45	-	37.65	17.19	48.90			
AV	20.62411G	35.38	63.54	-28.16	29.44	1	Vertical	210	2.45	-	37.65	17.19	48.90			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6875MHz_TX

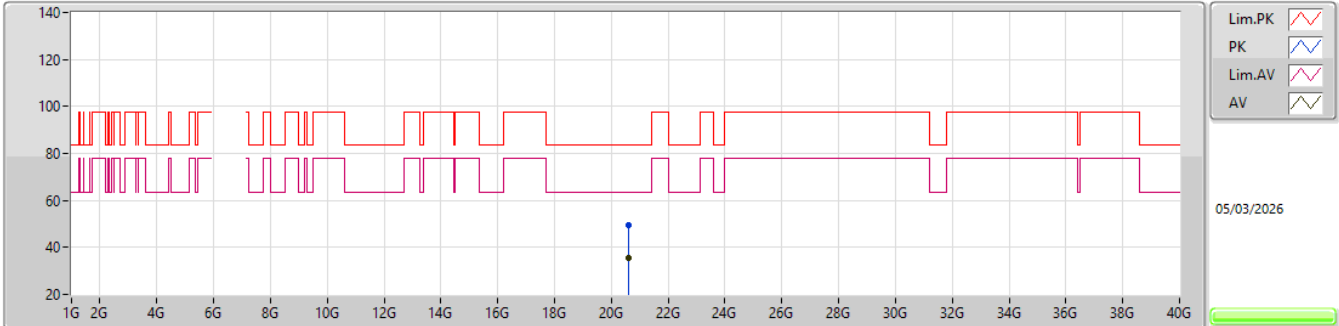EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.6239G	49.25	83.54	-34.29	43.31	1	Horizontal	146	1.87	-	37.65	17.19	48.90			
AV	20.62007G	35.37	63.54	-28.17	29.43	1	Horizontal	146	1.87	-	37.66	17.18	48.90			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6995MHz_TX

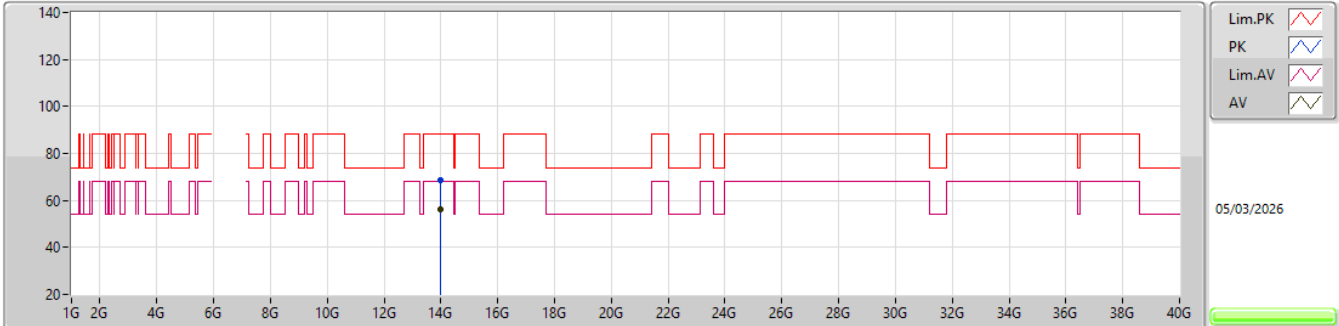


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.9948G	68.50	88.20	-19.70	57.54	3	Vertical	7	1.80	-	40.80	15.28	45.12			
RMS	13.99495G	55.99	68.20	-12.21	45.03	3	Vertical	7	1.80	-	40.80	15.28	45.12			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6995MHz_TX

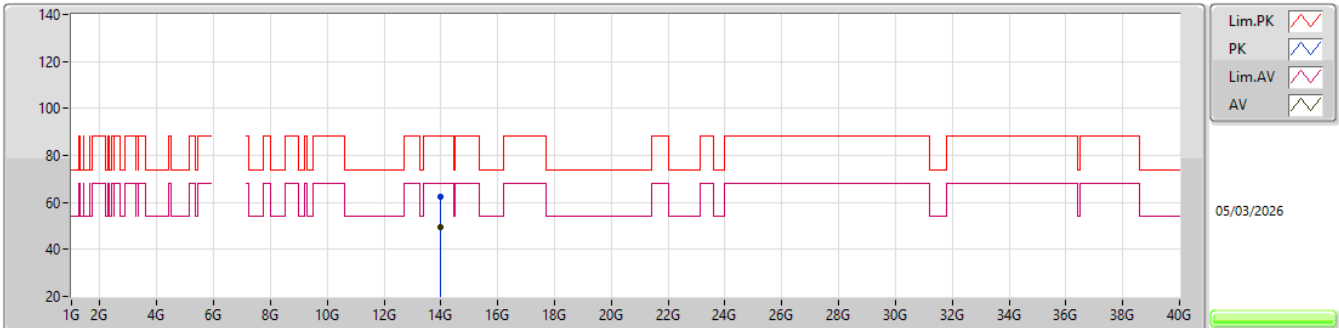


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.98553G	62.28	88.20	-25.92	49.20	3	Horizontal	75	1.80	-	40.71	16.06	43.69			
RMS	13.98592G	49.26	68.20	-18.94	36.17	3	Horizontal	75	1.80	-	40.72	16.06	43.69			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6995MHz_TX

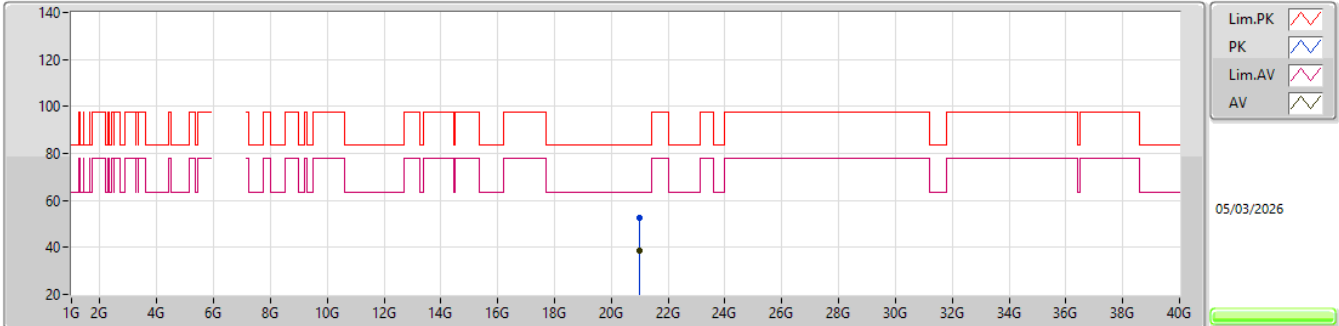


EUT Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.98203G	52.45	83.54	-31.09	46.10	1	Vertical	47	2.87	-	37.74	17.51	48.90			
AV	20.98759G	38.48	63.54	-25.06	32.14	1	Vertical	47	2.87	-	37.72	17.52	48.90			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6995MHz_TX

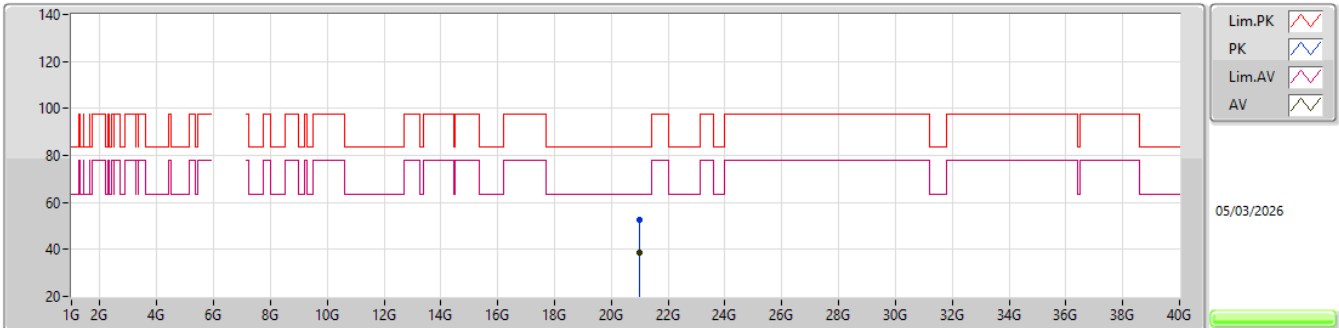


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.98537G	52.67	83.54	-30.87	46.32	1	Horizontal	262	2.29	-	37.73	17.52	48.90			
AV	20.98775G	38.48	63.54	-25.06	32.14	1	Horizontal	262	2.29	-	37.72	17.52	48.90			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7095MHz_TX

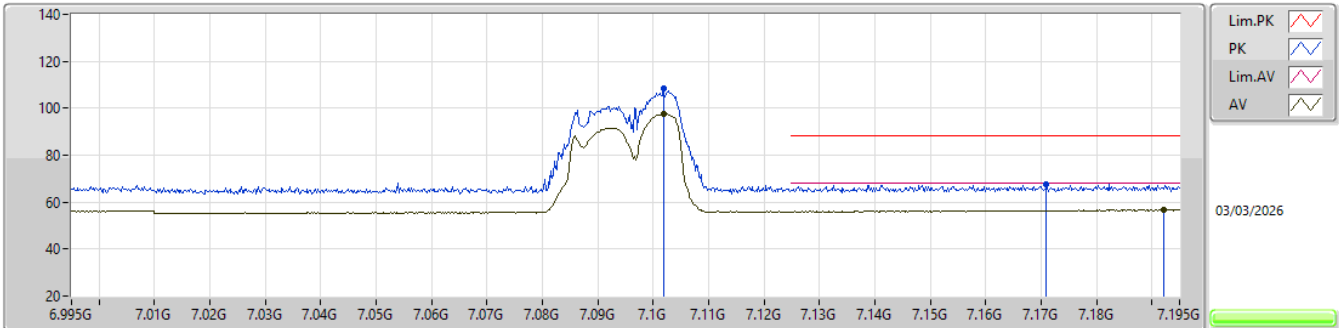


EUT_Y_4TX
Setting 9
04-W-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1018G	108.35	Inf	-Inf	94.81	3	Vertical	301	1.80	-	35.61	10.15	32.22			
RMS	7.1018G	97.54	Inf	-Inf	84.00	3	Vertical	301	1.80	-	35.61	10.15	32.22			
PK	7.171G	67.64	88.20	-20.56	53.79	3	Vertical	301	1.80	-	35.93	10.24	32.32			
RMS	7.1922G	56.75	68.20	-11.45	42.78	3	Vertical	301	1.80	-	36.05	10.27	32.35			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7095MHz_TX

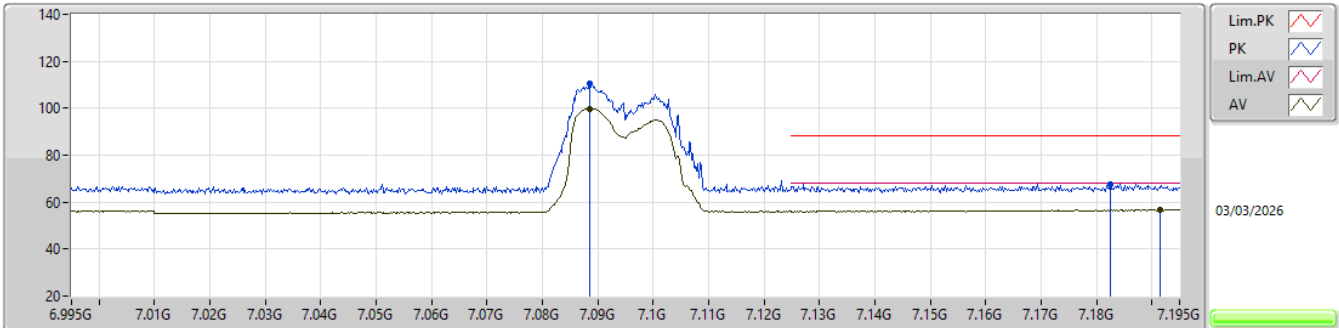


EUT_Y_4TX
Setting 9
04-W-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0886G	110.51	Inf	-Inf	97.05	3	Horizontal	73	2.21	-	35.53	10.13	32.20			
RMS	7.0886G	99.88	Inf	-Inf	86.42	3	Horizontal	73	2.21	-	35.53	10.13	32.20			
PK	7.1826G	67.72	88.20	-20.48	53.79	3	Horizontal	73	2.21	-	36.00	10.26	32.33			
RMS	7.1916G	56.70	68.20	-11.50	42.73	3	Horizontal	73	2.21	-	36.05	10.27	32.35			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7095MHz_TX

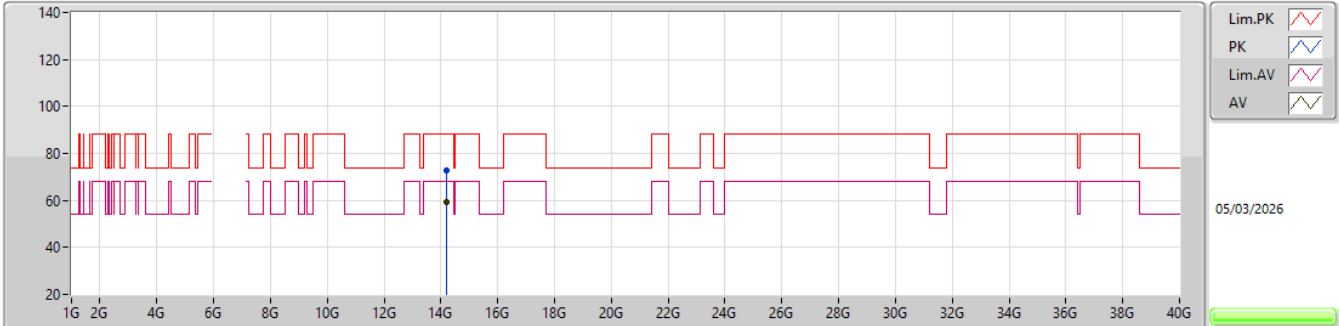


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.19354G	72.79	88.20	-15.41	61.70	3	Vertical	8.8	2.05	-	40.80	15.29	45.00			
RMS	14.19264G	59.16	68.20	-9.04	48.07	3	Vertical	8.8	2.05	-	40.80	15.29	45.00			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7095MHz_TX

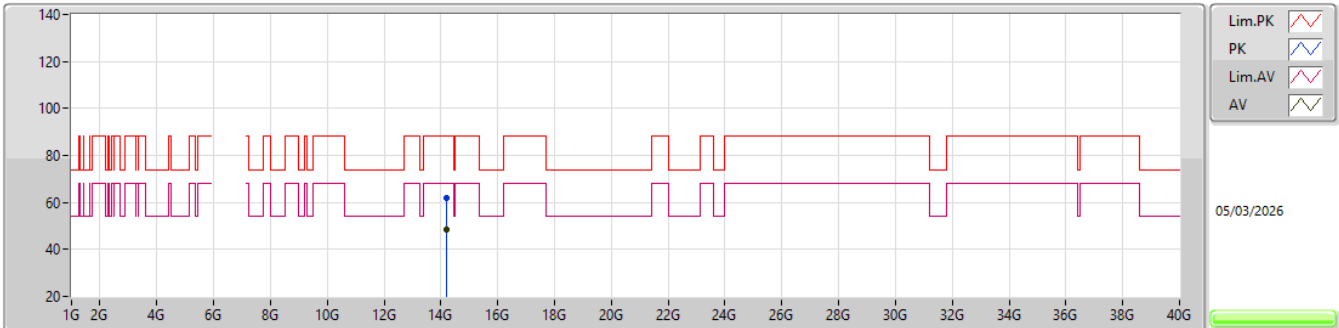


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.18061G	62.12	88.20	-26.08	51.03	3	Horizontal	24	1.80	-	40.80	15.29	45.00			
RMS	14.18052G	48.54	68.20	-19.66	37.45	3	Horizontal	24	1.80	-	40.80	15.29	45.00			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7095MHz_TX

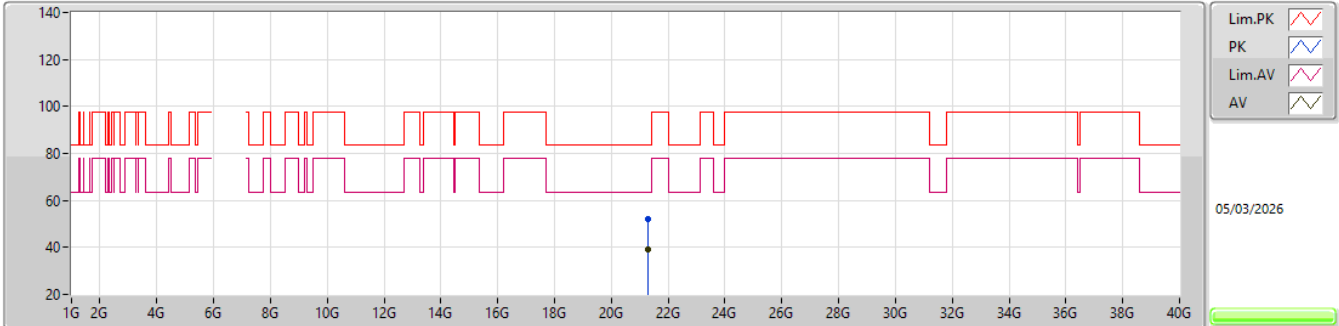


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.28652G	52.07	83.54	-31.47	45.76	1	Vertical	27	1.12	-	37.68	17.42	48.79			
AV	21.28273G	39.34	63.54	-24.20	33.00	1	Vertical	27	1.12	-	37.70	17.43	48.79			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7095MHz_TX

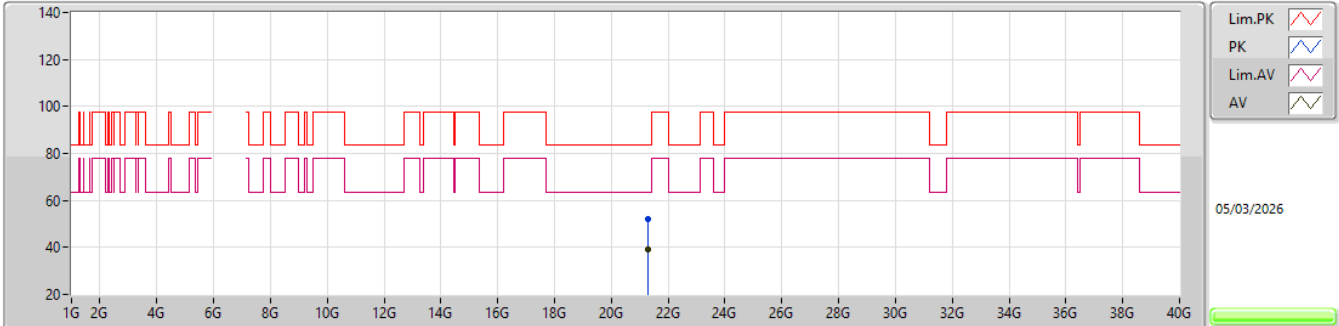


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.28841G	51.86	83.54	-31.68	45.55	1	Horizontal	191	2.26	-	37.67	17.42	48.78			
AV	21.28547G	39.21	63.54	-24.33	32.89	1	Horizontal	191	2.26	-	37.69	17.42	48.79			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7115MHz_TX

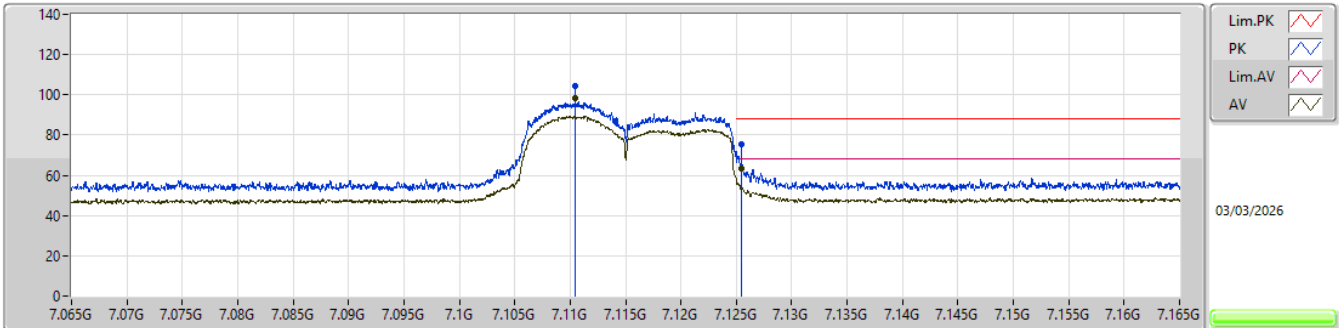


EUT_Y_4TX
Setting 8.5
04-W-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1105G	104.56	Inf	-Inf	90.99	3	Vertical	299	2.77	BP 1MHz	35.64	10.16	32.23			
AV	7.1105G	98.45	Inf	-Inf	84.88	3	Vertical	299	2.77	BP 1MHz	35.64	10.16	32.23			
PK	7.1255G	75.24	88.20	-12.96	61.61	3	Vertical	299	2.77	BP 1MHz	35.70	10.18	32.25			
AV	7.1255G	63.42	68.20	-4.78	49.79	3	Vertical	299	2.77	BP 1MHz	35.70	10.18	32.25			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7115MHz_TX

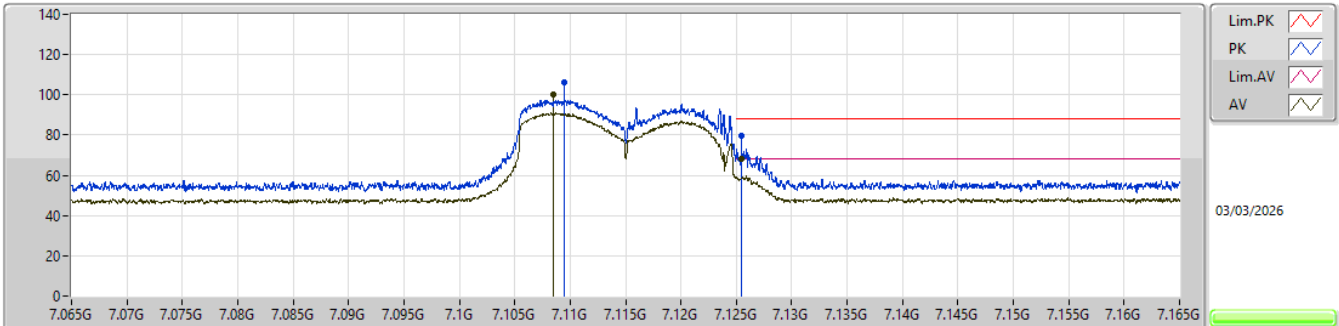


EUT_Y_4TX
Setting 8.5
04-W-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.1095G	106.03	Inf	-Inf	92.46	3	Horizontal	76	2.21	BP 1MHz	35.64	10.16	32.23			
AV	7.1085G	100.07	Inf	-Inf	86.51	3	Horizontal	76	2.21	BP 1MHz	35.63	10.16	32.23			
PK	7.1255G	79.70	88.20	-8.50	66.07	3	Horizontal	76	2.21	BP 1MHz	35.70	10.18	32.25			
AV	7.1255G	68.19	68.20	-0.01	54.56	3	Horizontal	76	2.21	BP 1MHz	35.70	10.18	32.25			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7115MHz_TX

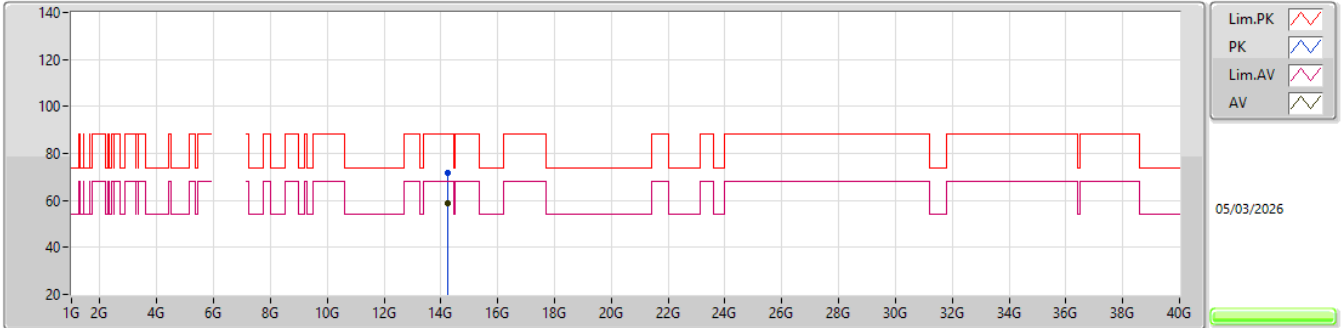


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.23231G	71.59	88.20	-16.61	60.53	3	Vertical	16	1.80	-	40.74	15.29	44.97			
RMS	14.23324G	58.84	68.20	-9.36	47.79	3	Vertical	16	1.80	-	40.73	15.29	44.97			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7115MHz_TX

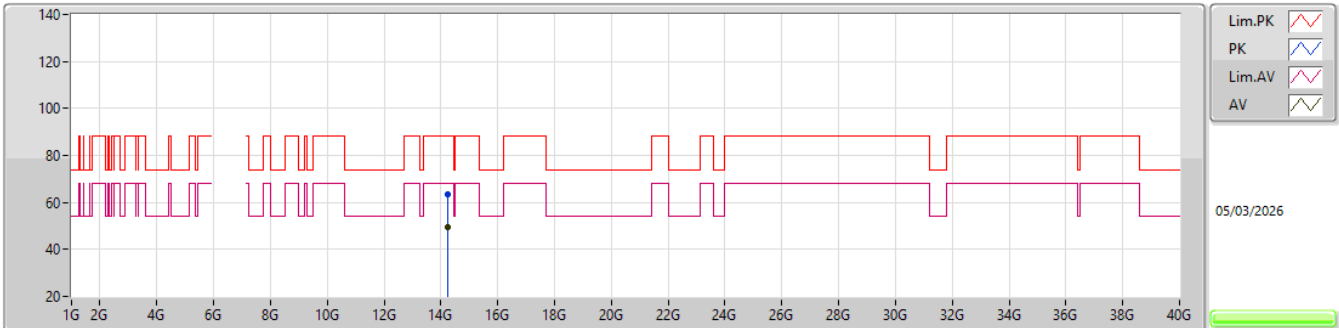


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.24008G	63.62	88.20	-24.58	52.58	3	Horizontal	58	1.80	-	40.72	15.29	44.97			
RMS	14.2396G	49.37	68.20	-18.83	38.33	3	Horizontal	58	1.80	-	40.72	15.29	44.97			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7115MHz_TX

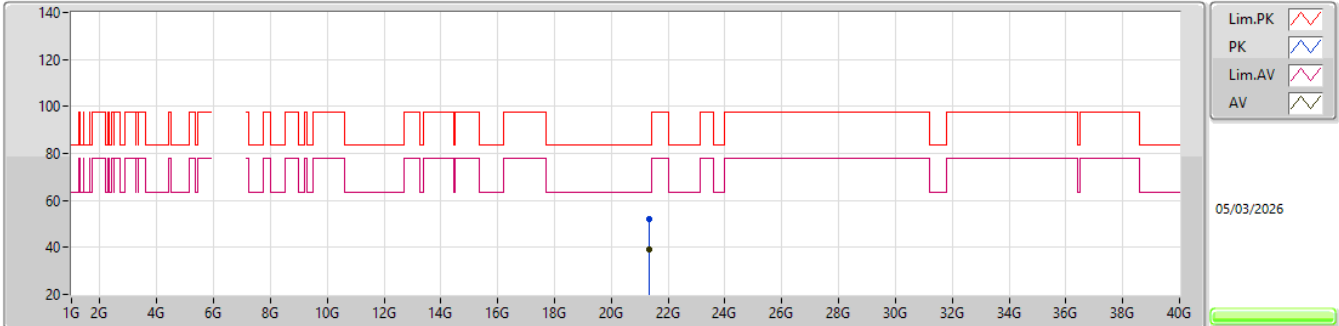


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	21.34837G	51.87	83.54	-31.67	45.53	1	Vertical	60	2.95	-	37.70	17.40	48.76				
AV	21.34167G	39.33	63.54	-24.21	33.01	1	Vertical	60	2.95	-	37.68	17.40	48.76				

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7115MHz_TX

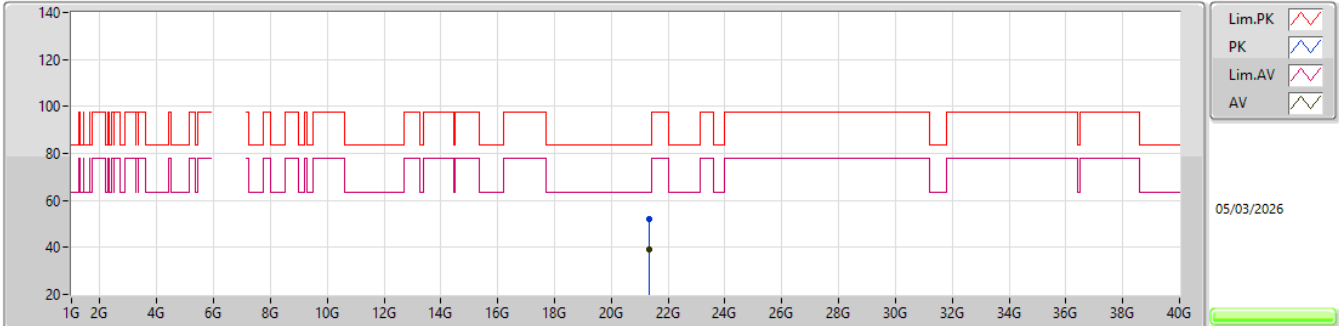


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.34543G	52.17	83.54	-31.37	45.84	1	Horizontal	268	2.85	-	37.69	17.40	48.76			
AV	21.34177G	39.22	63.54	-24.32	32.90	1	Horizontal	268	2.85	-	37.68	17.40	48.76			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

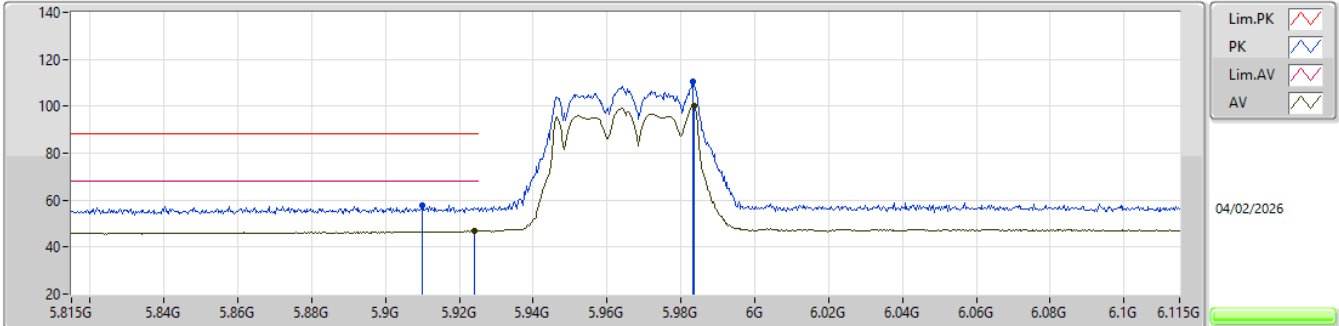


EUT_Y_4TX
Setting 13.5
04-W-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9101G	57.97	88.20	-30.23	59.94	3	Vertical	27.8	1.80	-	32.40	9.04	43.41			
RMS	5.9242G	46.92	68.20	-21.28	48.87	3	Vertical	27.8	1.80	-	32.40	9.05	43.40			
PK	5.9833G	110.63	Inf	-Inf	112.46	3	Vertical	27.8	1.80	-	32.40	9.12	43.35			
RMS	5.9836G	99.98	Inf	-Inf	101.81	3	Vertical	27.8	1.80	-	32.40	9.12	43.35			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

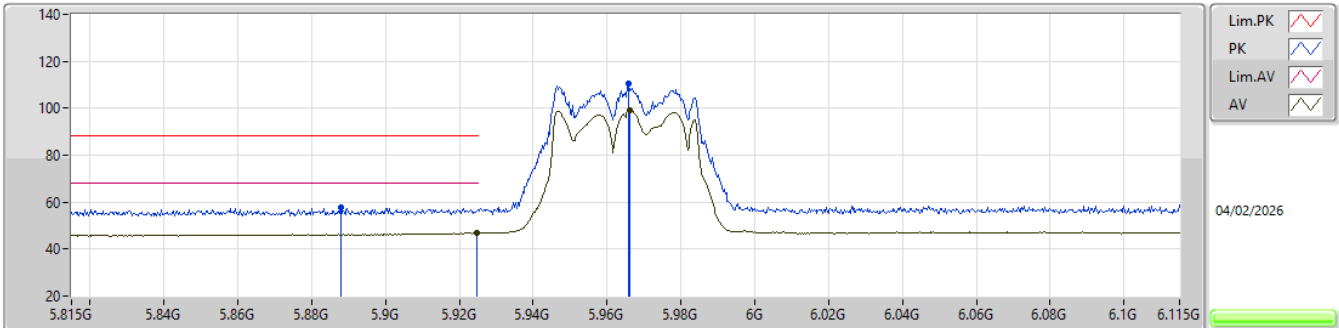


EUT_Y_4TX
Setting 13.5
04-W-5-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8879G	57.63	88.20	-30.57	59.70	3	Horizontal	79.6	1.80	-	32.35	9.01	43.43			
RMS	5.9248G	47.06	68.20	-21.14	49.01	3	Horizontal	79.6	1.80	-	32.40	9.05	43.40			
PK	5.9659G	110.56	Inf	-Inf	112.43	3	Horizontal	79.6	1.80	-	32.40	9.10	43.37			
RMS	5.9662G	99.21	Inf	-Inf	101.08	3	Horizontal	79.6	1.80	-	32.40	9.10	43.37			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

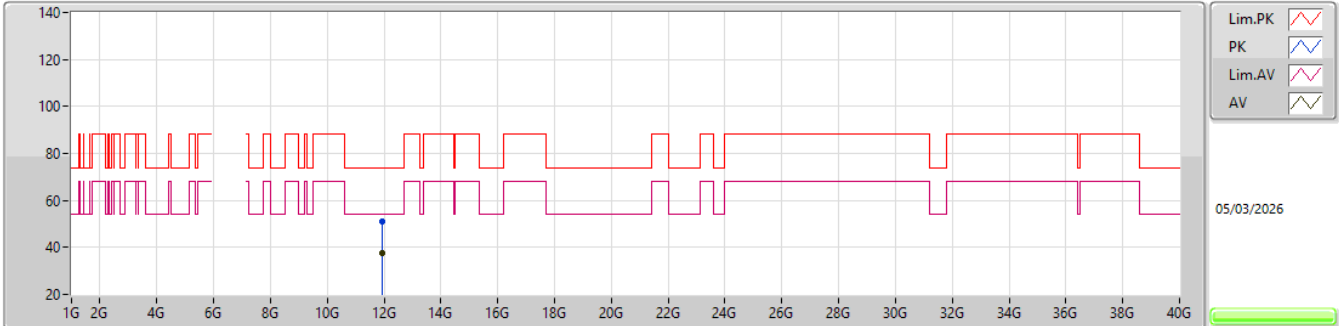


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.93531G	50.84	74.00	-23.16	43.11	3	Vertical	340	1.80	-	38.70	14.98	45.95			
AV	11.9369G	37.36	54.00	-16.64	29.62	3	Vertical	340	1.80	-	38.70	14.99	45.95			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

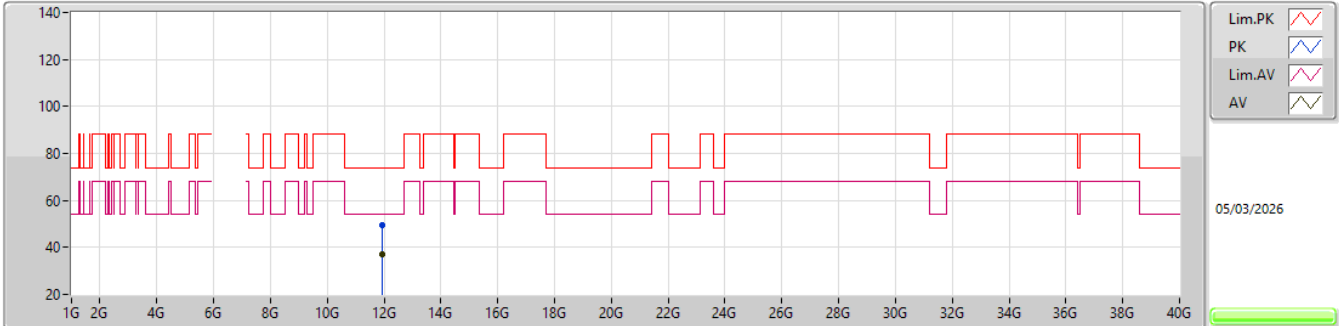


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.93012G	49.58	74.00	-24.42	41.85	3	Horizontal	338	1.80	-	38.70	14.98	45.95			
AV	11.92988G	36.82	54.00	-17.18	29.09	3	Horizontal	338	1.80	-	38.70	14.98	45.95			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

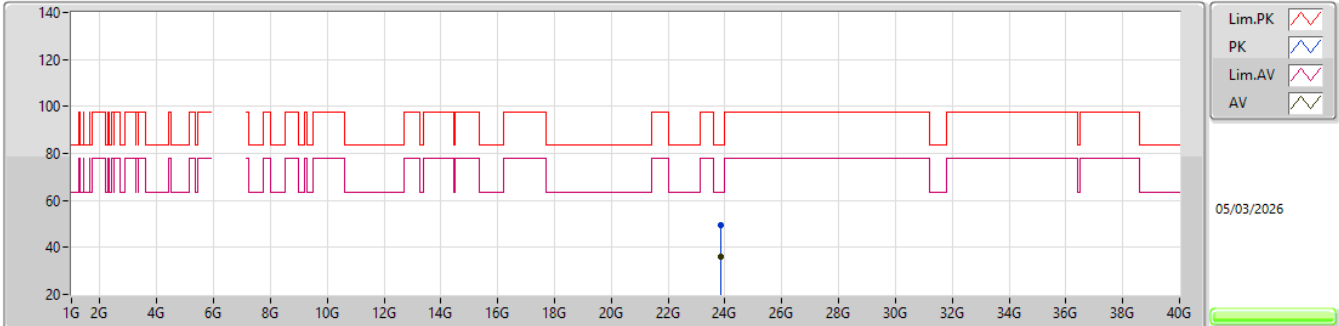


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85567G	49.51	83.54	-34.03	40.59	1	Vertical	109	1.46	-	38.90	17.92	47.90			
AV	23.85574G	36.03	63.54	-27.51	27.11	1	Vertical	109	1.46	-	38.90	17.92	47.90			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

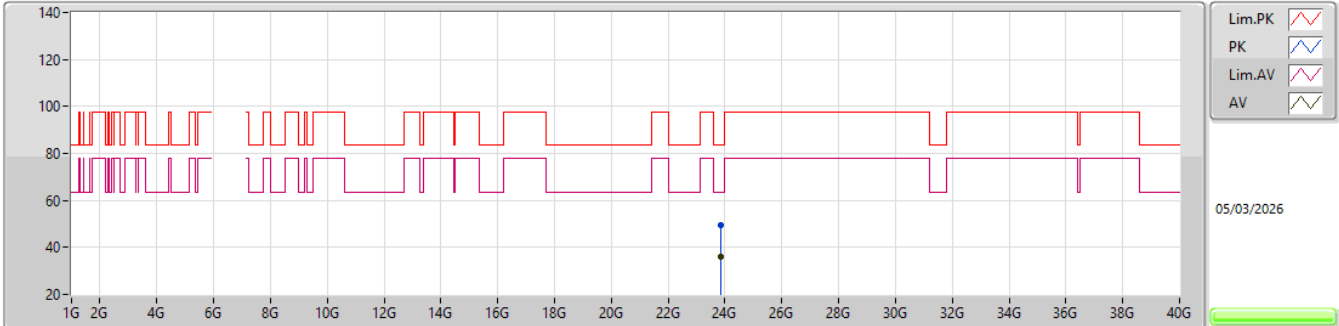


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.86207G	49.47	83.54	-34.07	40.56	1	Horizontal	188	2.19	-	38.90	17.91	47.90			
AV	23.85593G	35.94	63.54	-27.60	27.02	1	Horizontal	188	2.19	-	38.90	17.92	47.90			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6205MHz_TX

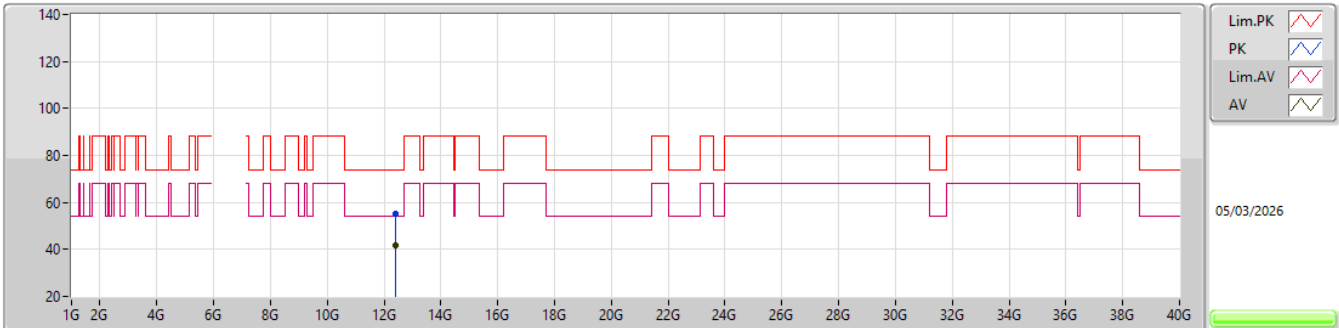


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41042G	55.22	74.00	-18.78	47.08	3	Vertical	32	1.78	-	38.62	15.07	45.55			
AV	12.41018G	41.84	54.00	-12.16	33.70	3	Vertical	32	1.78	-	38.62	15.07	45.55			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6205MHz_TX

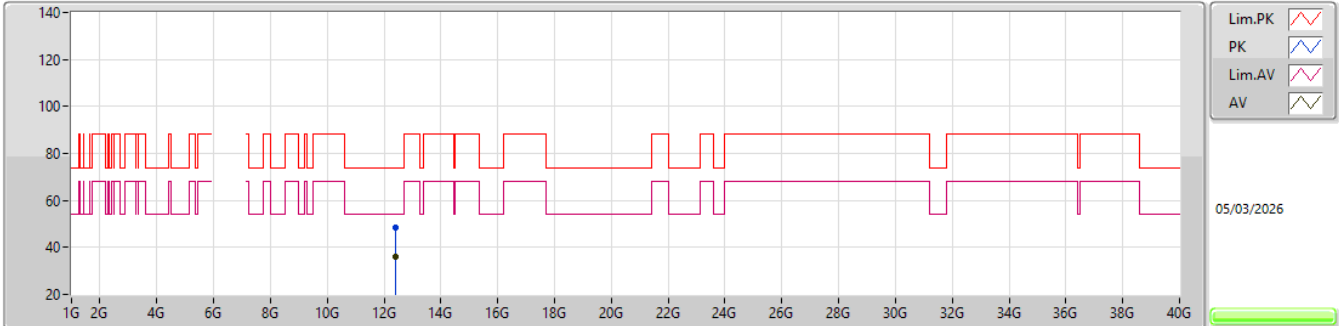


EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41093G	48.36	74.00	-25.64	40.22	3	Horizontal	24	1.89	-	38.62	15.07	45.55			
AV	12.40994G	35.93	54.00	-18.07	27.79	3	Horizontal	24	1.89	-	38.62	15.07	45.55			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6205MHz_TX

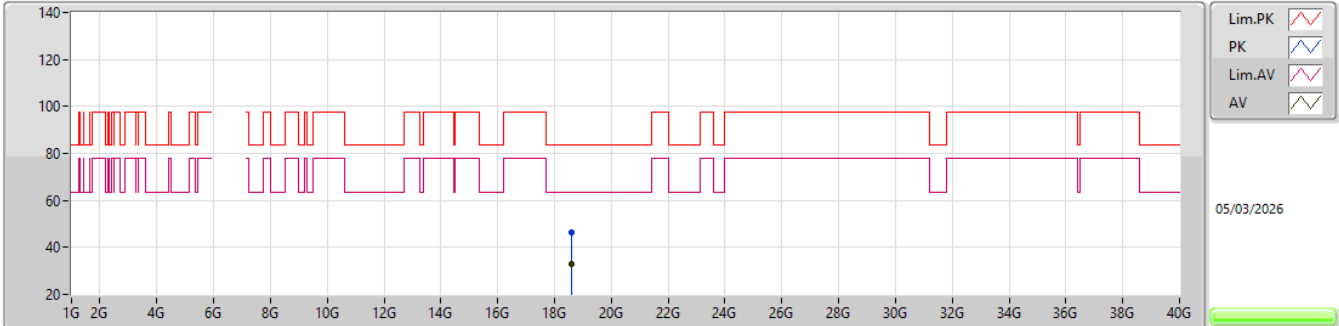


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61599G	46.42	83.54	-37.12	41.25	1	Vertical	260	1.39	-	37.67	16.17	48.67			
AV	18.61967G	33.15	63.54	-30.39	27.99	1	Vertical	260	1.39	-	37.66	16.17	48.67			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6205MHz_TX

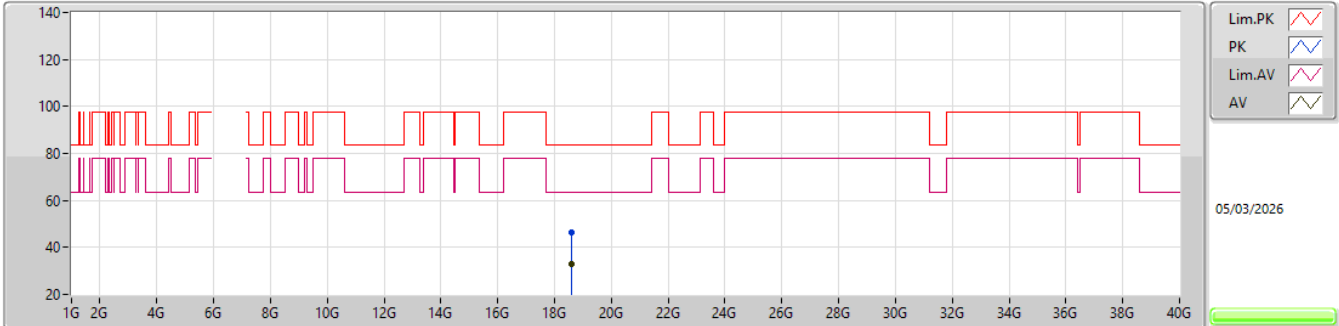


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61444G	46.41	83.54	-37.13	41.24	1	Horizontal	32	1.27	-	37.67	16.17	48.67			
AV	18.6199G	33.15	63.54	-30.39	27.99	1	Horizontal	32	1.27	-	37.66	16.17	48.67			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6405MHz_TX

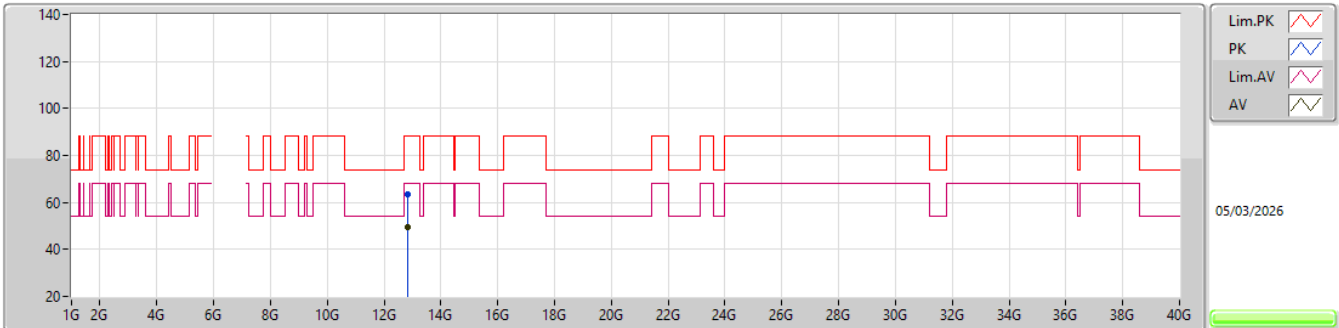EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81606G	63.63	88.20	-24.57	54.32	3	Vertical	9	1.79	-	39.93	15.13	45.75			
RMS	12.81561G	49.62	68.20	-18.58	40.31	3	Vertical	9	1.79	-	39.93	15.13	45.75			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6405MHz_TX

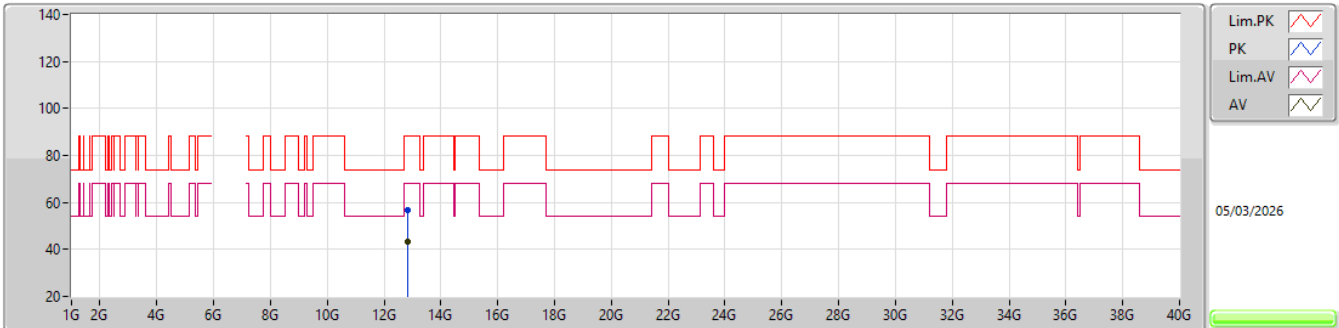


EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82281G	56.96	88.20	-31.24	47.64	3	Horizontal	293	1.80	-	39.95	15.13	45.76			
RMS	12.82134G	43.19	68.20	-25.01	33.88	3	Horizontal	293	1.80	-	39.94	15.13	45.76			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6405MHz_TX

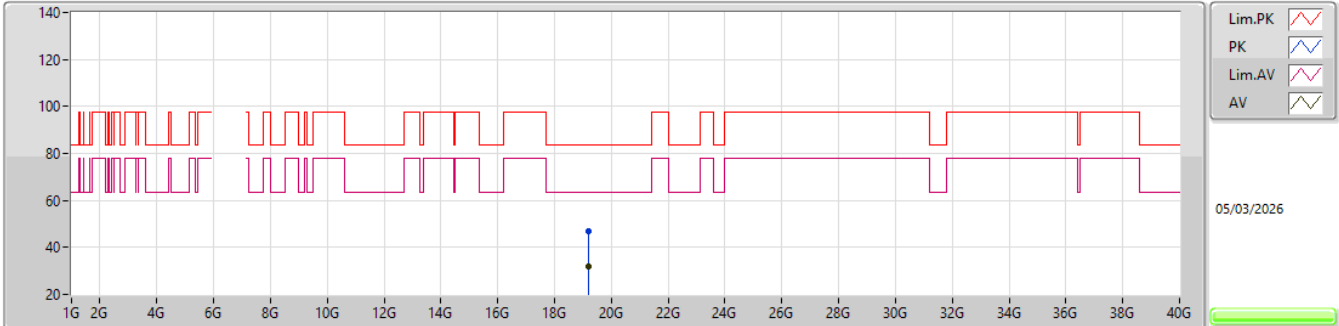


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21626G	46.74	83.54	-36.80	41.40	1	Vertical	227	2.61	-	37.70	16.50	48.86			
AV	19.2119G	32.15	63.54	-31.39	26.84	1	Vertical	227	2.61	-	37.67	16.50	48.86			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6405MHz_TX

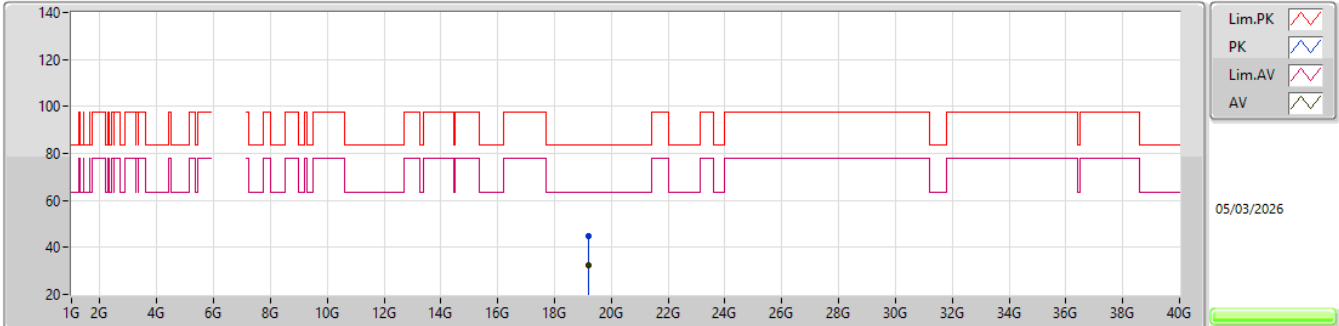


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2163G	45.05	83.54	-38.49	39.71	1	Horizontal	321	2.77	-	37.70	16.50	48.86			
AV	19.21464G	32.17	63.54	-31.37	26.84	1	Horizontal	321	2.77	-	37.69	16.50	48.86			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6445MHz_TX

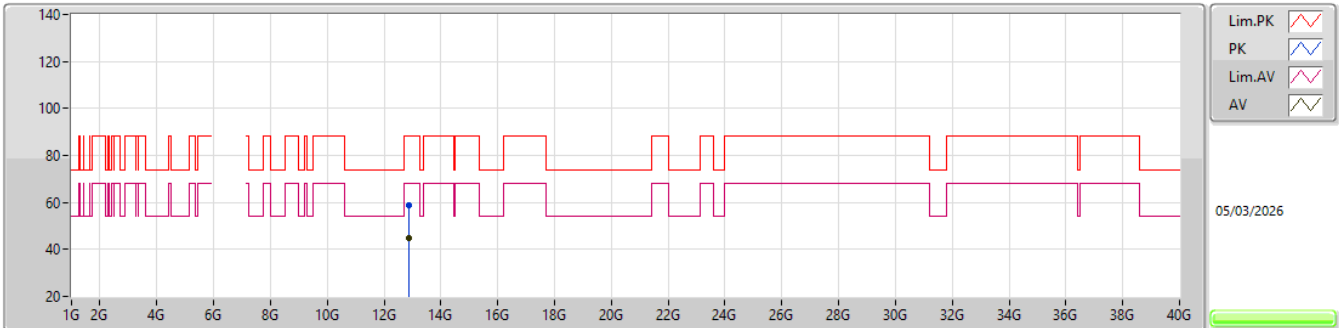
EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.87638G	58.74	88.20	-29.46	49.42	3	Vertical	48	1.79	-	40.00	15.13	45.81			
RMS	12.87788G	44.88	68.20	-23.32	35.56	3	Vertical	48	1.79	-	40.00	15.13	45.81			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6445MHz_TX

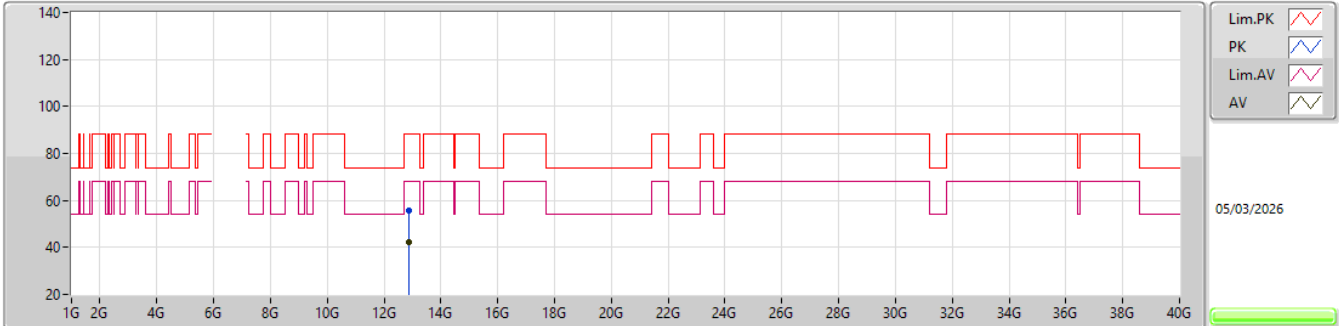


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88871G	55.72	88.20	-32.48	46.40	3	Horizontal	117	1.80	-	40.00	15.14	45.82			
RMS	12.88703G	42.10	68.20	-26.10	32.78	3	Horizontal	117	1.80	-	40.00	15.14	45.82			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6445MHz_TX

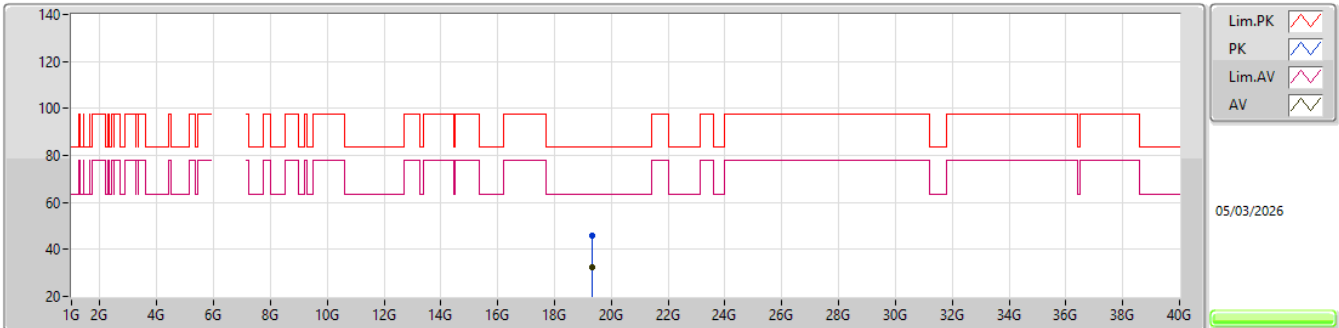


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.33791G	45.63	83.54	-37.91	40.26	1	Vertical	341	2.25	-	37.68	16.52	48.83			
AV	19.33414G	32.56	63.54	-30.98	27.20	1	Vertical	341	2.25	-	37.67	16.52	48.83			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6445MHz_TX

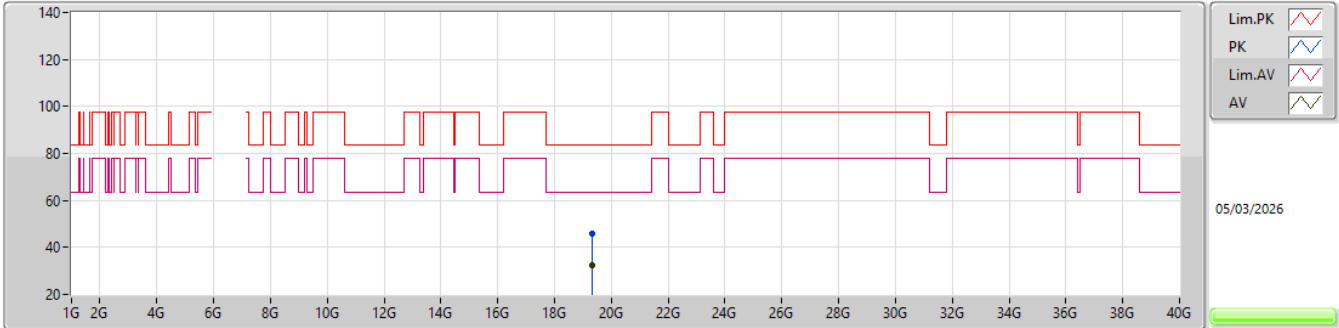


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.33334G	45.64	83.54	-37.90	40.28	1	Horizontal	206	1.95	-	37.67	16.52	48.83			
AV	19.33132G	32.50	63.54	-31.04	27.15	1	Horizontal	206	1.95	-	37.66	16.52	48.83			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6485MHz_TX

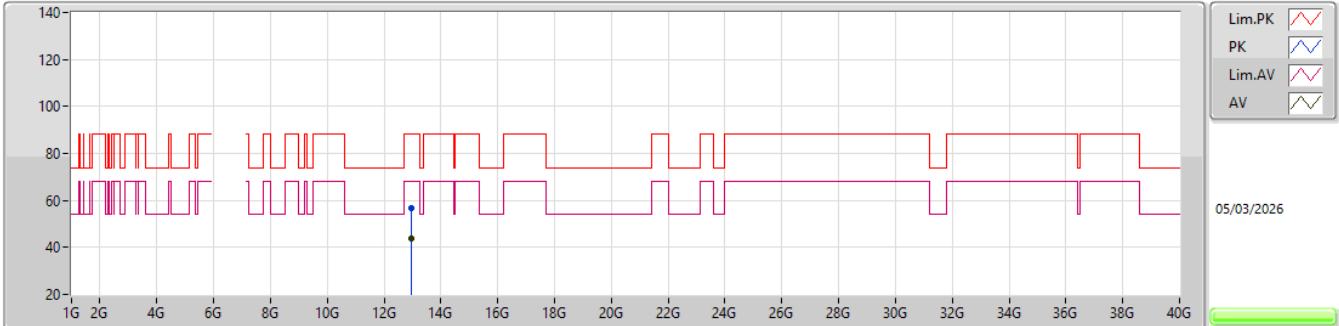


EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.95755G	56.65	88.20	-31.55	47.21	3	Vertical	322	1.80	-	40.18	15.14	45.88			
RMS	12.97657G	43.67	68.20	-24.53	34.27	3	Vertical	322	1.80	-	40.15	15.15	45.90			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6485MHz_TX

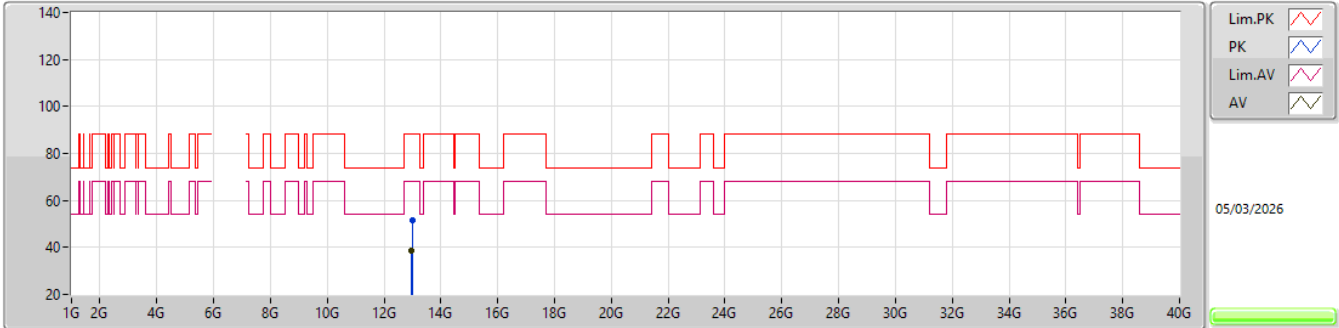


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.98236G	51.70	88.20	-36.50	42.31	3	Horizontal	324	2.19	-	40.14	15.15	45.90			
RMS	12.9637G	38.73	68.20	-29.47	29.30	3	Horizontal	324	2.19	-	40.17	15.15	45.89			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6485MHz_TX

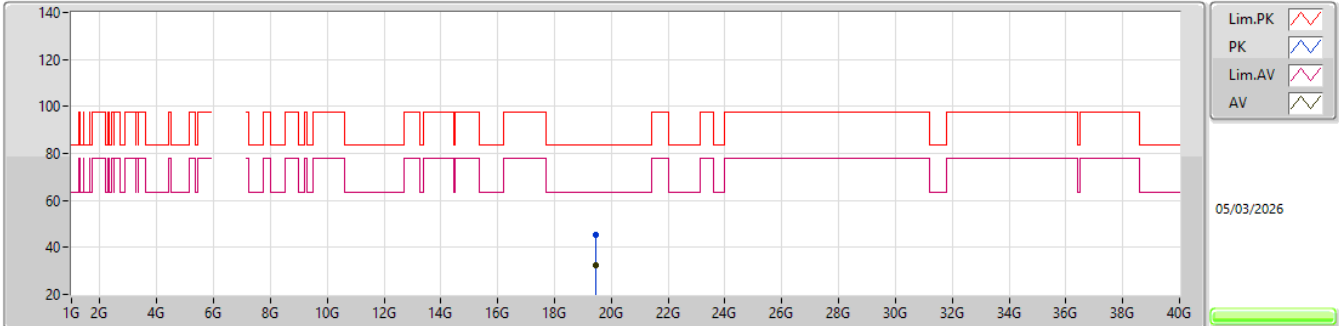


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45509G	45.28	83.54	-38.26	39.96	1	Vertical	258	1.40	-	37.59	16.54	48.81			
AV	19.45385G	32.29	63.54	-31.25	26.97	1	Vertical	258	1.40	-	37.59	16.54	48.81			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6485MHz_TX

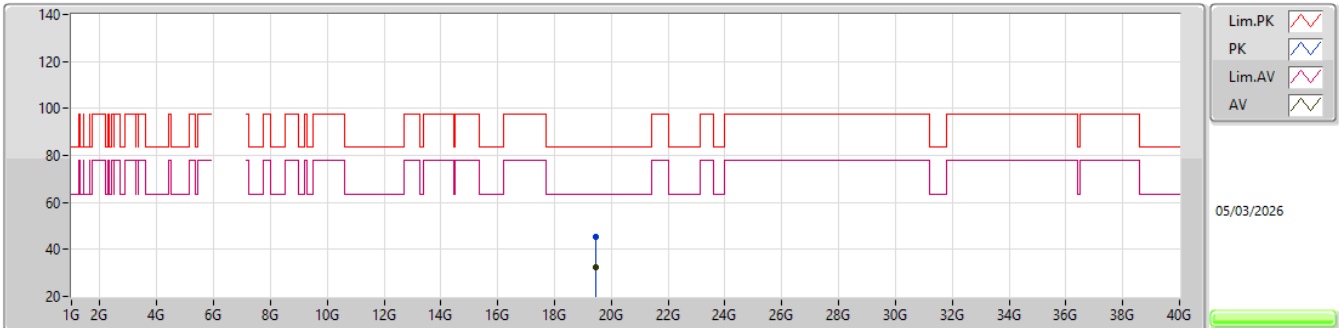EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45684G	45.51	83.54	-38.03	40.19	1	Horizontal	186	2.81	-	37.59	16.54	48.81			
AV	19.45634G	32.24	63.54	-31.30	26.92	1	Horizontal	186	2.81	-	37.59	16.54	48.81			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6525MHz_TX

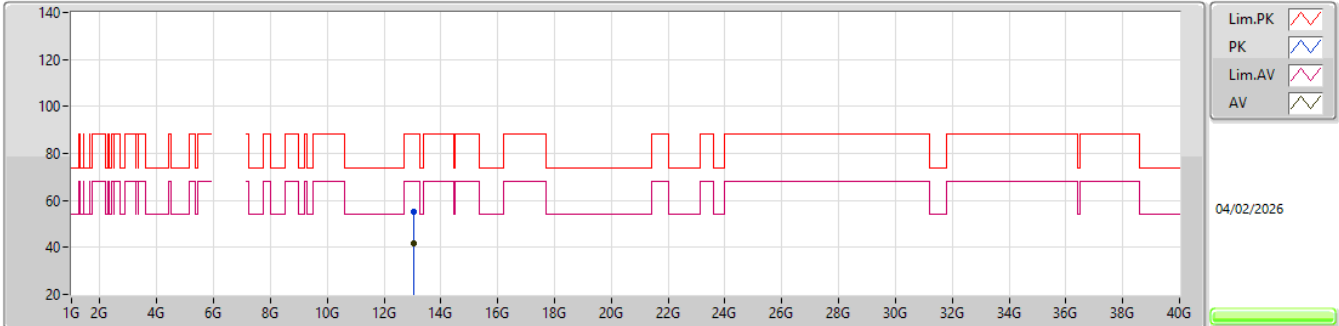


EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.03551G	55.19	88.20	-33.01	45.94	3	Vertical	20	1.80	-	39.96	15.15	45.86			
RMS	13.03551G	41.78	68.20	-26.42	32.53	3	Vertical	20	1.80	-	39.96	15.15	45.86			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6525MHz_TX

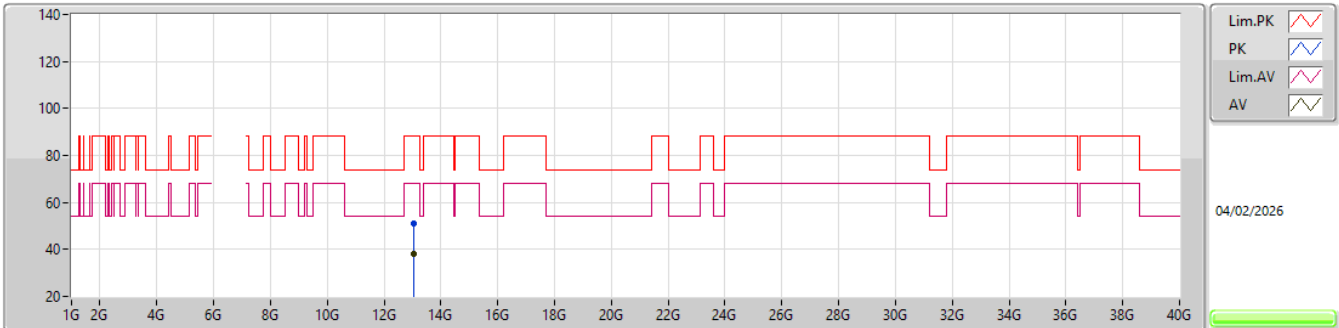


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05249G	51.11	88.20	-37.09	41.87	3	Horizontal	360	1.80	-	39.90	15.16	45.82			
RMS	13.05348G	38.19	68.20	-30.01	28.95	3	Horizontal	360	1.80	-	39.90	15.16	45.82			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6525MHz_TX

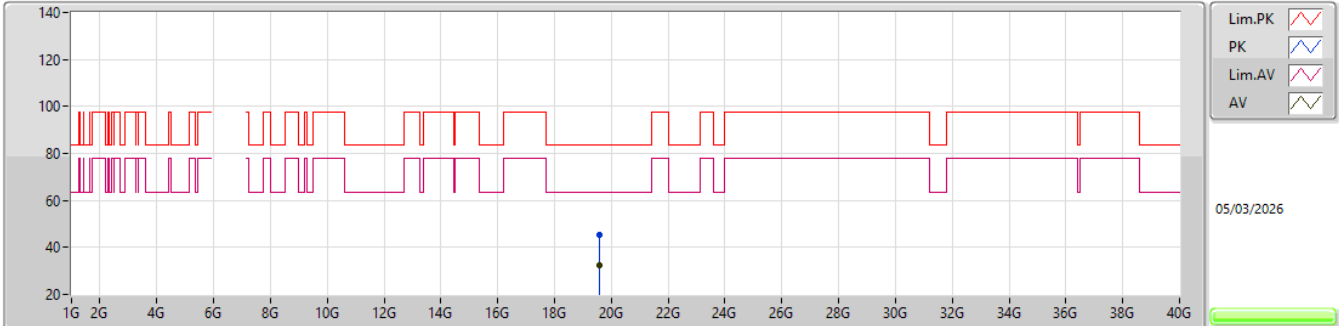


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.57496G	45.48	83.54	-38.06	40.15	1	Vertical	71	2.02	-	37.60	16.56	48.83			
AV	19.57G	32.50	63.54	-31.04	27.17	1	Vertical	71	2.02	-	37.60	16.56	48.83			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6525MHz_TX

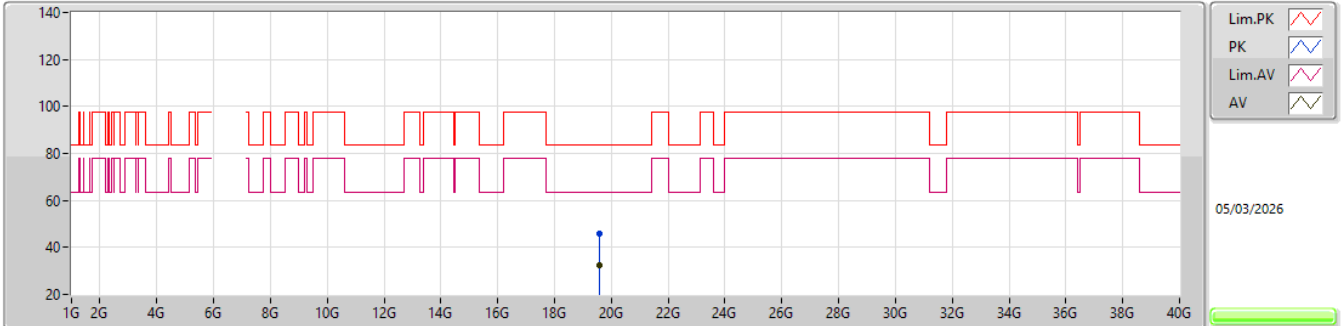


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.57693G	45.73	83.54	-37.81	40.40	1	Horizontal	299	2.12	-	37.60	16.56	48.83			
AV	19.57801G	32.43	63.54	-31.11	27.10	1	Horizontal	299	2.12	-	37.60	16.56	48.83			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6565MHz_TX

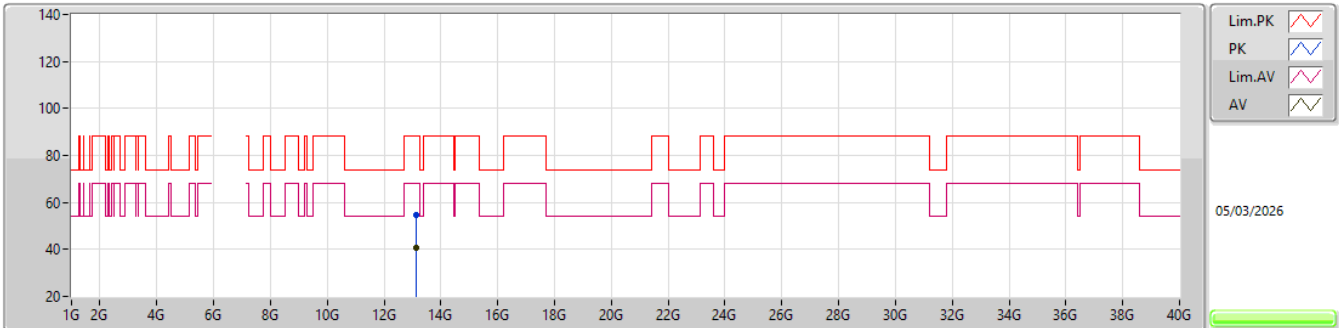


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.13477G	54.70	88.20	-33.50	45.23	3	Vertical	17	1.80	-	39.97	15.17	45.67			
RMS	13.13444G	40.44	68.20	-27.76	30.98	3	Vertical	17	1.80	-	39.97	15.17	45.68			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6565MHz_TX

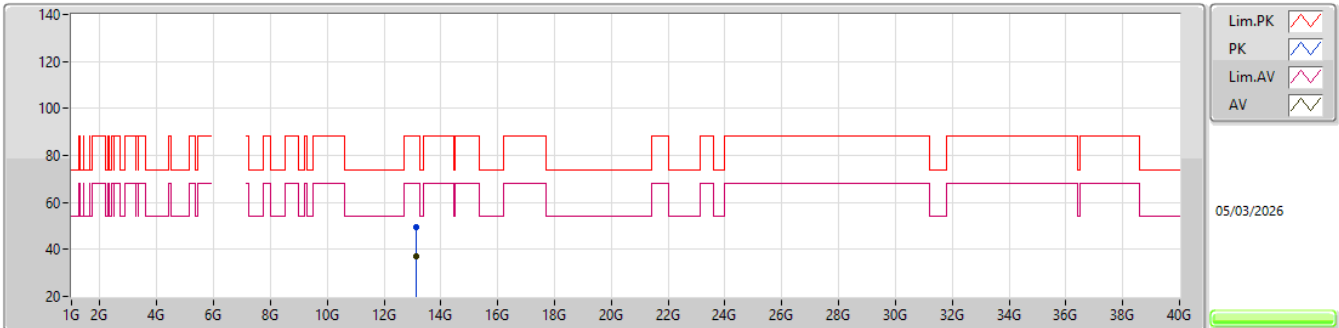EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.12349G	49.32	88.20	-38.88	39.90	3	Horizontal	275	1.12	-	39.95	15.17	45.70			
RMS	13.12562G	36.84	68.20	-31.36	27.41	3	Horizontal	275	1.12	-	39.95	15.17	45.69			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6565MHz_TX

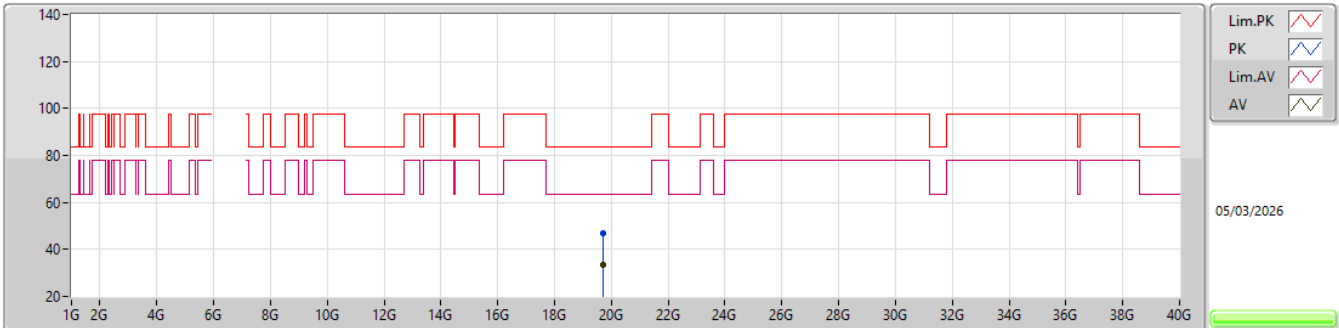


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69722G	46.70	83.54	-36.84	41.32	1	Vertical	282	1.79	-	37.69	16.57	48.88			
AV	19.69875G	33.20	63.54	-30.34	27.81	1	Vertical	282	1.79	-	37.70	16.57	48.88			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6565MHz_TX

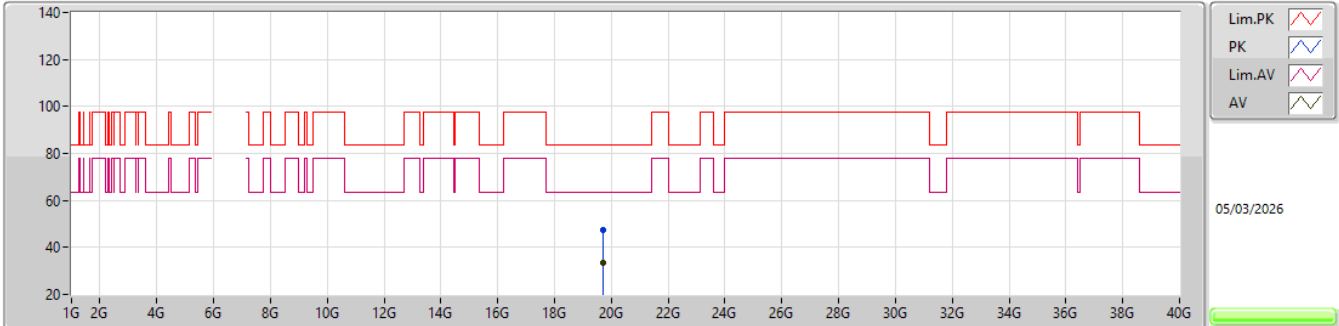


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69224G	47.59	83.54	-35.95	42.23	1	Horizontal	227	2.72	-	37.67	16.57	48.88			
AV	19.69599G	33.27	63.54	-30.27	27.90	1	Horizontal	227	2.72	-	37.68	16.57	48.88			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6685MHz_TX

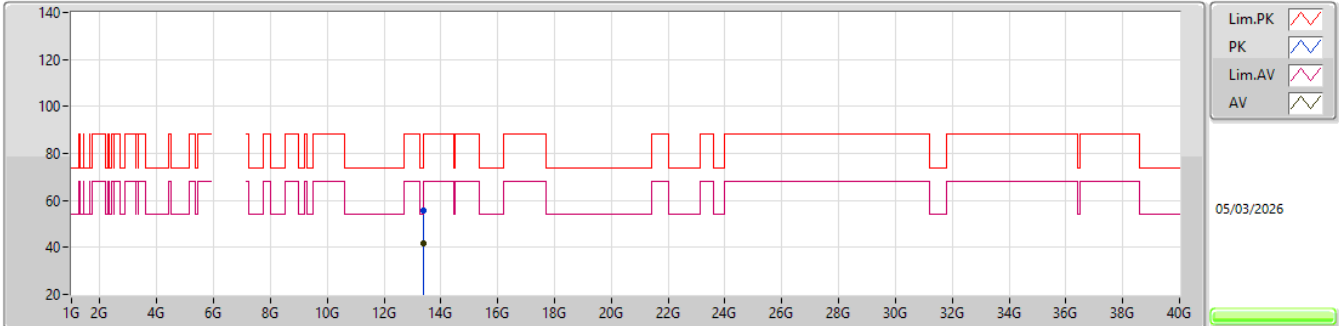


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37393G	55.48	74.00	-18.52	45.12	3	Vertical	8	1.79	-	40.40	15.20	45.24			
AV	13.3751G	41.56	54.00	-12.44	31.20	3	Vertical	8	1.79	-	40.40	15.20	45.24			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6685MHz_TX

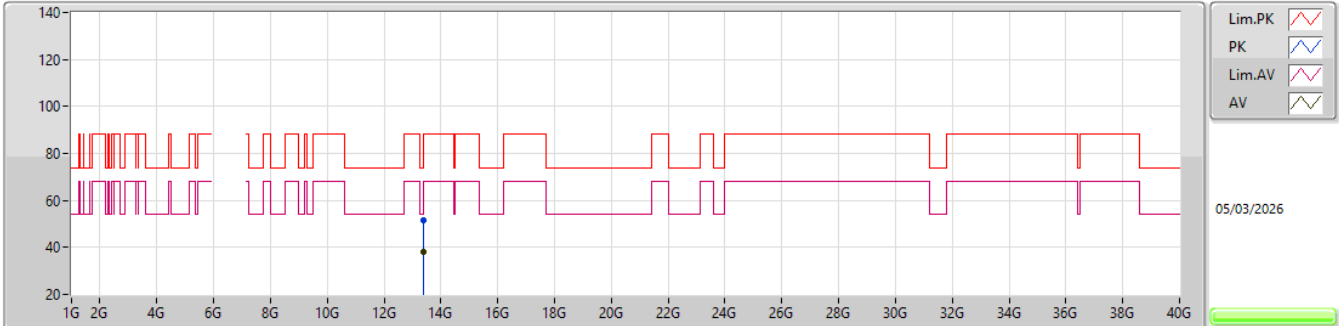


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37708G	51.50	74.00	-22.50	41.13	3	Horizontal	316	2.87	-	40.40	15.20	45.23			
AV	13.37522G	38.11	54.00	-15.89	27.75	3	Horizontal	316	2.87	-	40.40	15.20	45.24			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6685MHz_TX

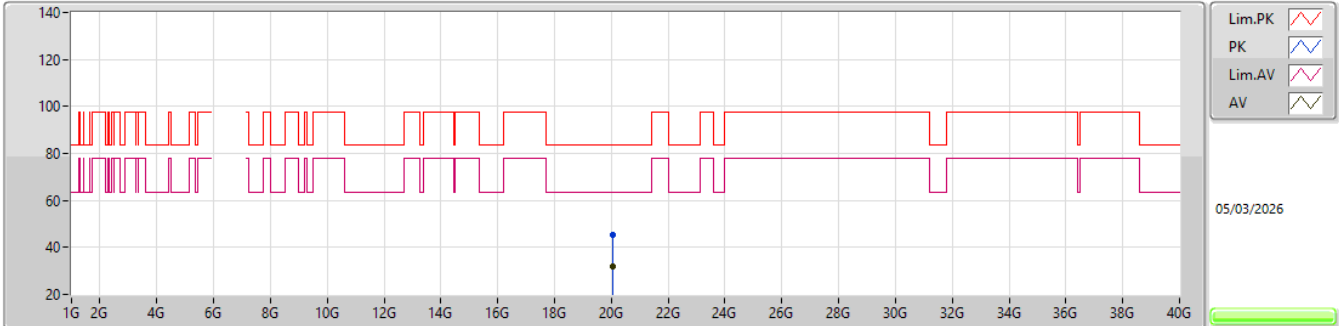


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.05368G	45.37	83.54	-38.17	40.48	1	Vertical	209	2.77	-	37.21	16.67	48.99			
AV	20.05929G	32.04	63.54	-31.50	27.14	1	Vertical	209	2.77	-	37.22	16.67	48.99			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6685MHz_TX

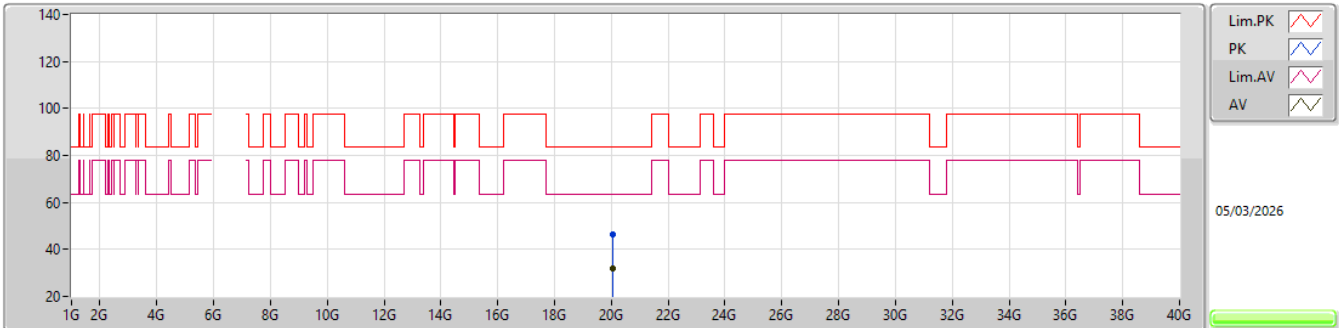


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0563G	46.38	83.54	-37.16	41.49	1	Horizontal	334	2.84	-	37.21	16.67	48.99			
AV	20.0595G	32.11	63.54	-31.43	27.21	1	Horizontal	334	2.84	-	37.22	16.67	48.99			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6845MHz_TX

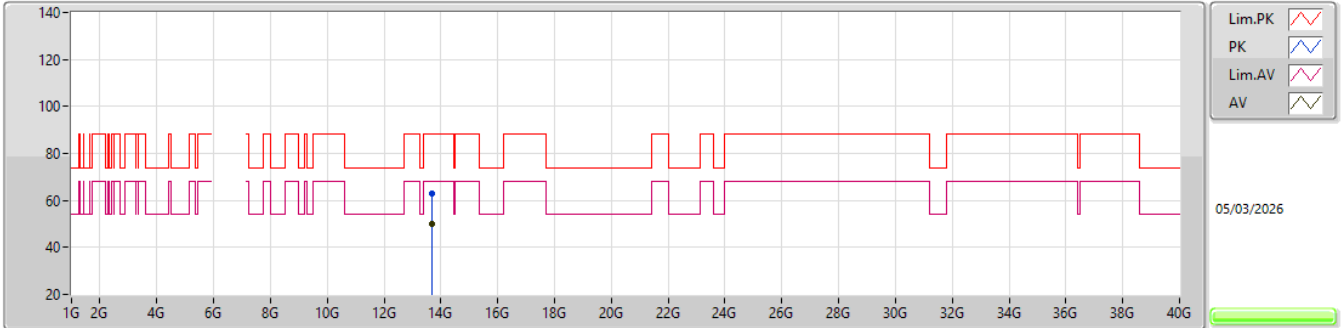


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.69375G	62.78	88.20	-25.42	51.90	3	Vertical	10	1.80	-	40.69	15.24	45.05			
RMS	13.69414G	49.91	68.20	-18.29	39.03	3	Vertical	10	1.80	-	40.69	15.24	45.05			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6845MHz_TX

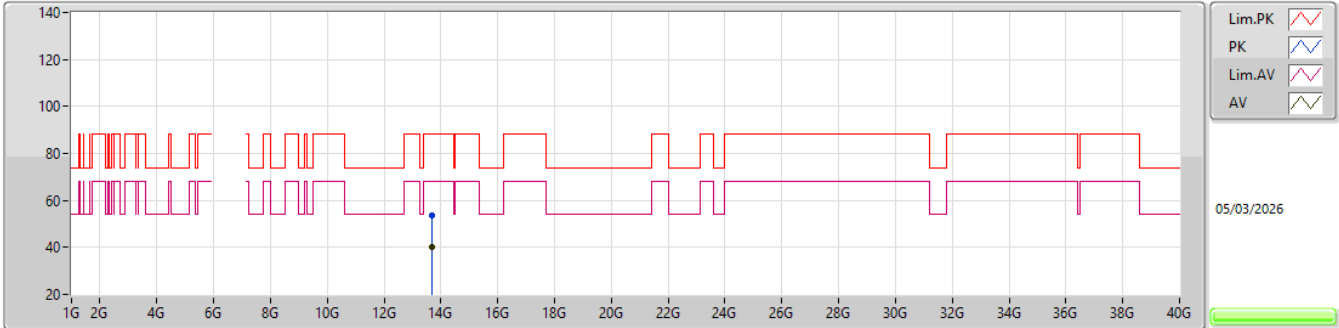


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.6996G	53.85	88.20	-34.35	42.96	3	Horizontal	175	2.66	-	40.70	15.24	45.05			
RMS	13.70098G	40.25	68.20	-27.95	29.36	3	Horizontal	175	2.66	-	40.70	15.24	45.05			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6845MHz_TX

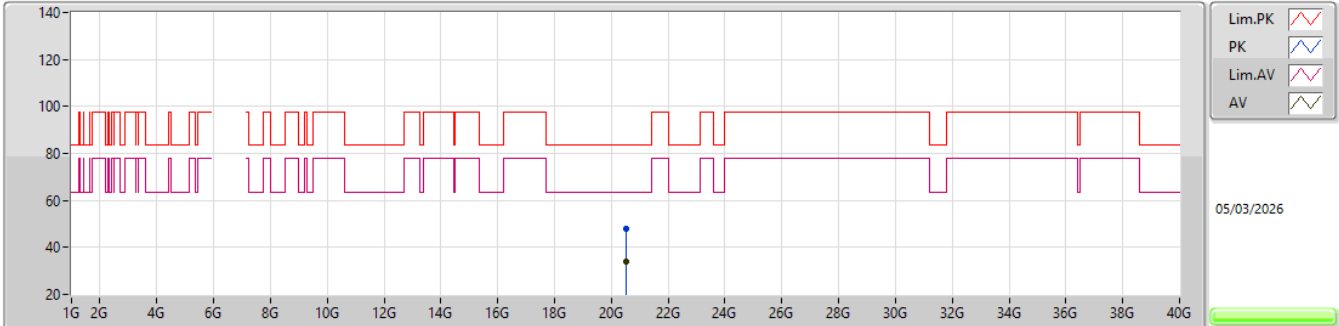


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.53898G	48.14	83.54	-35.40	42.41	1	Vertical	209	1.42	-	37.52	17.11	48.90			
AV	20.53032G	34.17	63.54	-29.37	28.43	1	Vertical	209	1.42	-	37.54	17.10	48.90			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6845MHz_TX

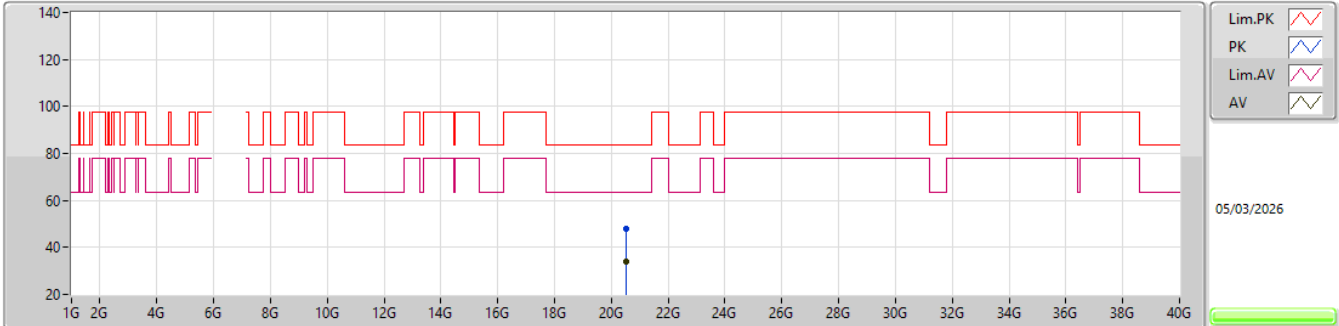


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.53708G	47.89	83.54	-35.65	42.15	1	Horizontal	41	2.62	-	37.53	17.11	48.90			
AV	20.53007G	34.15	63.54	-29.39	28.41	1	Horizontal	41	2.62	-	37.54	17.10	48.90			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6885MHz_TX

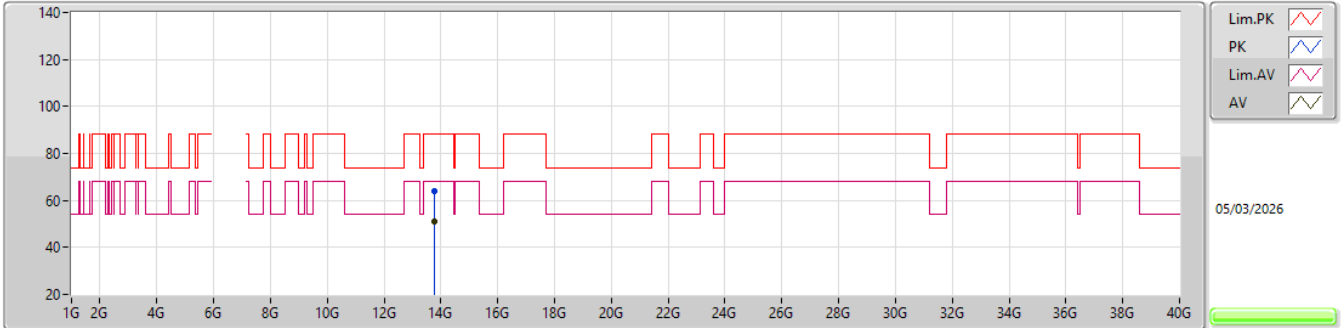


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.77474G	63.76	88.20	-24.44	52.98	3	Vertical	19	1.80	-	40.60	15.25	45.07			
RMS	13.77477G	50.83	68.20	-17.37	40.05	3	Vertical	19	1.80	-	40.60	15.25	45.07			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6885MHz_TX

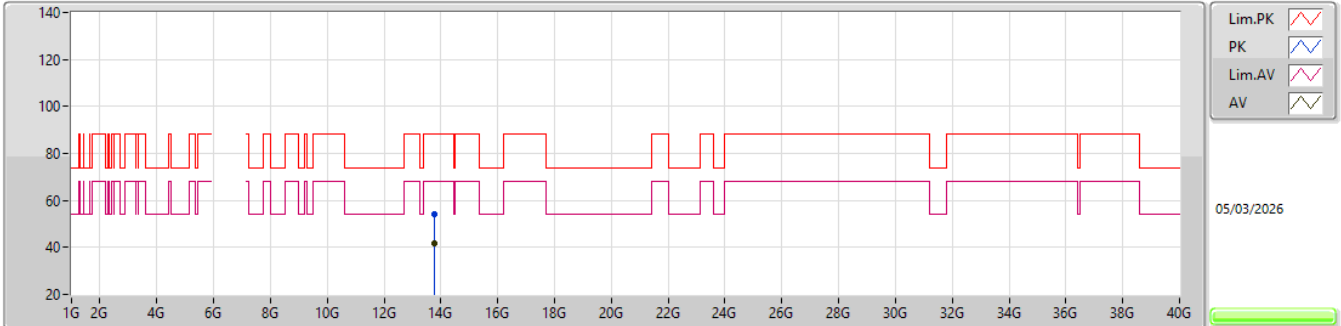


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.78065G	54.37	88.20	-33.83	43.59	3	Horizontal	19	1.79	-	40.60	15.25	45.07			
RMS	13.77012G	41.74	68.20	-26.46	30.96	3	Horizontal	19	1.79	-	40.60	15.25	45.07			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6885MHz_TX

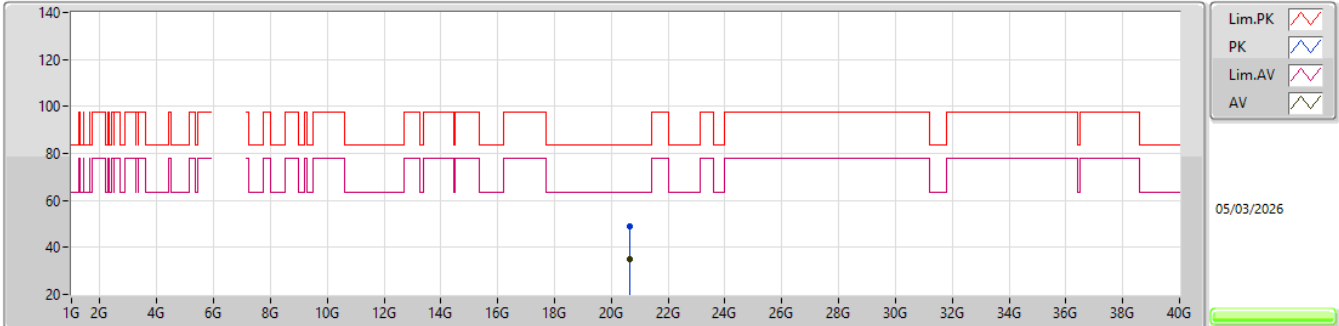


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.65064G	49.03	83.54	-34.51	43.12	1	Vertical	91	1.96	-	37.60	17.21	48.90			
AV	20.65608G	35.03	63.54	-28.51	29.12	1	Vertical	91	1.96	-	37.59	17.22	48.90			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6885MHz_TX

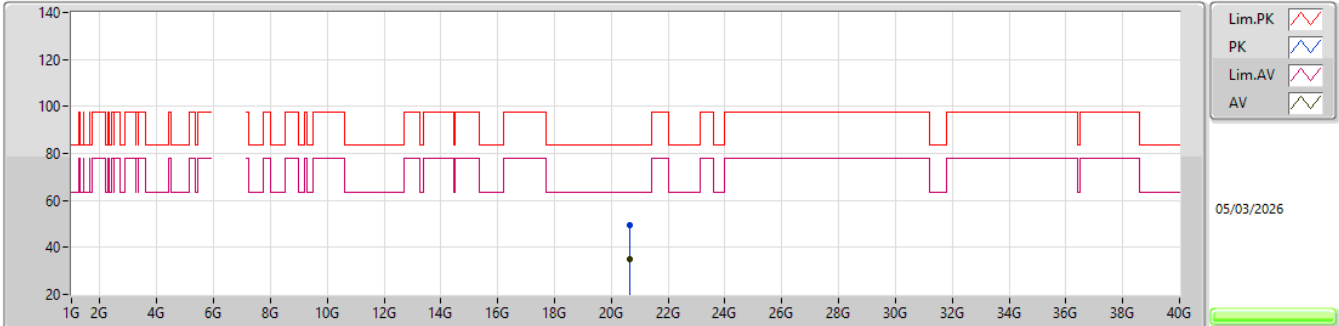


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.65434G	49.31	83.54	-34.23	43.40	1	Horizontal	261	1.58	-	37.59	17.22	48.90			
AV	20.65598G	35.00	63.54	-28.54	29.09	1	Horizontal	261	1.58	-	37.59	17.22	48.90			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7005MHz_TX

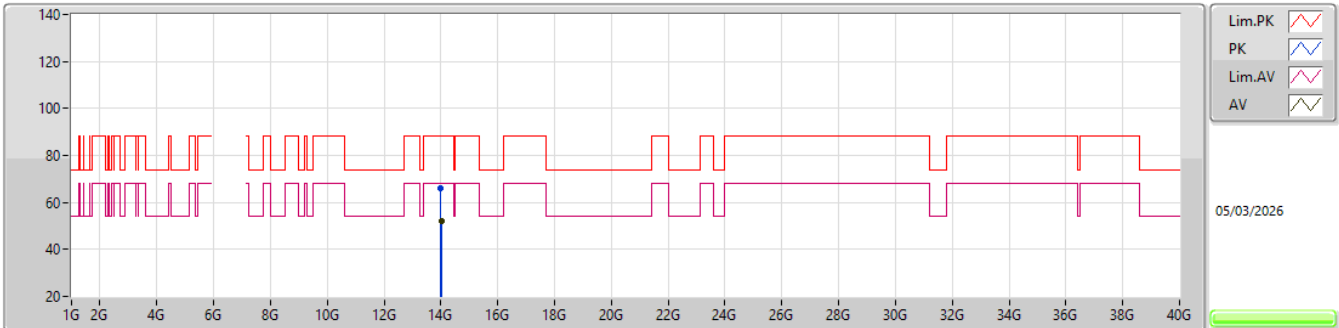


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.99512G	66.22	88.20	-21.98	55.26	3	Vertical	6	1.80	-	40.80	15.28	45.12			
RMS	14.01453G	52.30	68.20	-15.90	41.30	3	Vertical	6	1.80	-	40.83	15.28	45.11			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7005MHz_TX

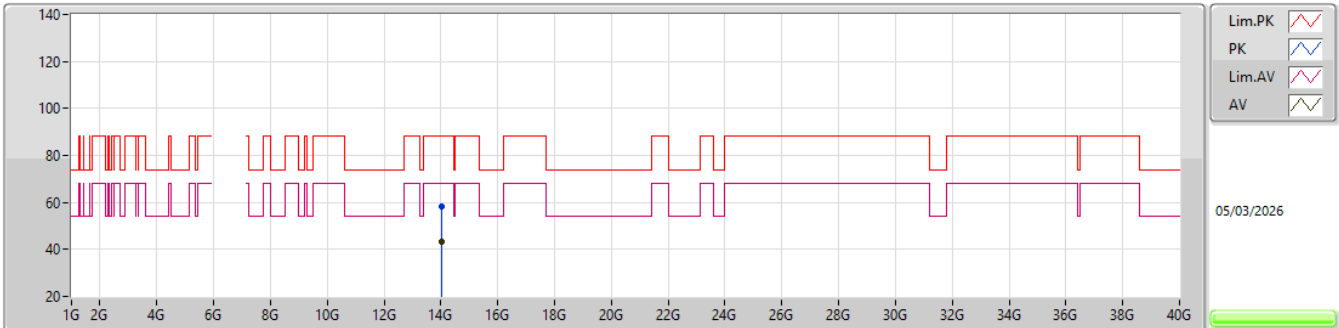


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.01981G	58.05	88.20	-30.15	47.04	3	Horizontal	165	2.91	-	40.84	15.28	45.11			
RMS	14.02032G	43.42	68.20	-24.78	32.41	3	Horizontal	165	2.91	-	40.84	15.28	45.11			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7005MHz_TX

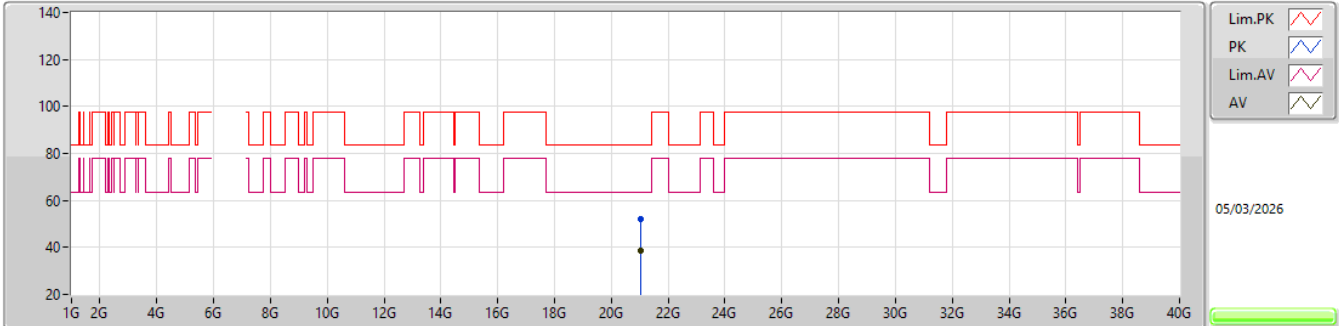


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.01866G	52.21	83.54	-31.33	45.84	1	Vertical	80	1.81	-	37.74	17.52	48.89			
AV	21.01976G	38.44	63.54	-25.10	32.07	1	Vertical	80	1.81	-	37.74	17.52	48.89			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7005MHz_TX

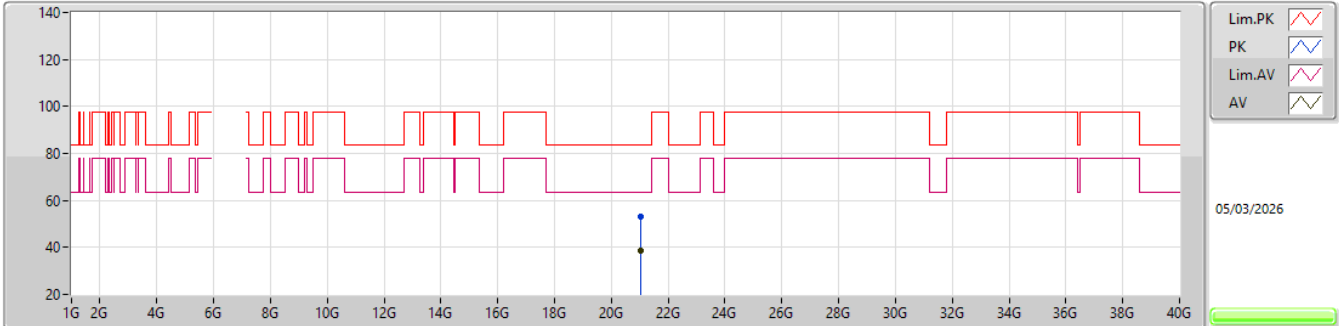


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.01296G	52.92	83.54	-30.62	46.55	1	Horizontal	279	1.26	-	37.73	17.53	48.89			
AV	21.01972G	38.46	63.54	-25.08	32.09	1	Horizontal	279	1.26	-	37.74	17.52	48.89			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7085MHz_TX

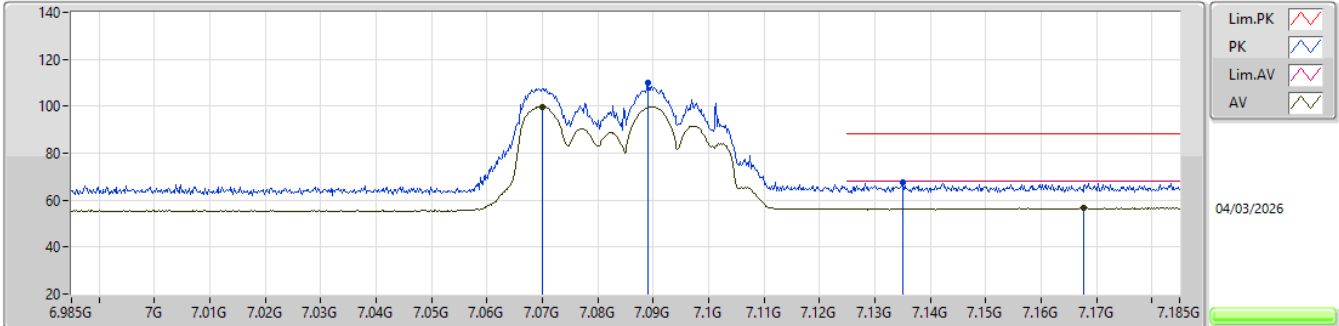


EUT_Y_4TX
Setting 13.5
01-C-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	7.089G	110.21	Inf	-Inf	95.30	3	Vertical	69	1.80	-	36.43	11.20	32.72				
RMS	7.07G	99.78	Inf	-Inf	85.03	3	Vertical	69	1.80	-	36.32	11.15	32.72				
PK	7.135G	67.43	88.20	-20.77	52.09	3	Vertical	69	1.80	-	36.71	11.33	32.70				
RMS	7.1676G	56.67	68.20	-11.53	41.07	3	Vertical	69	1.80	-	36.87	11.42	32.69				

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7085MHz_TX

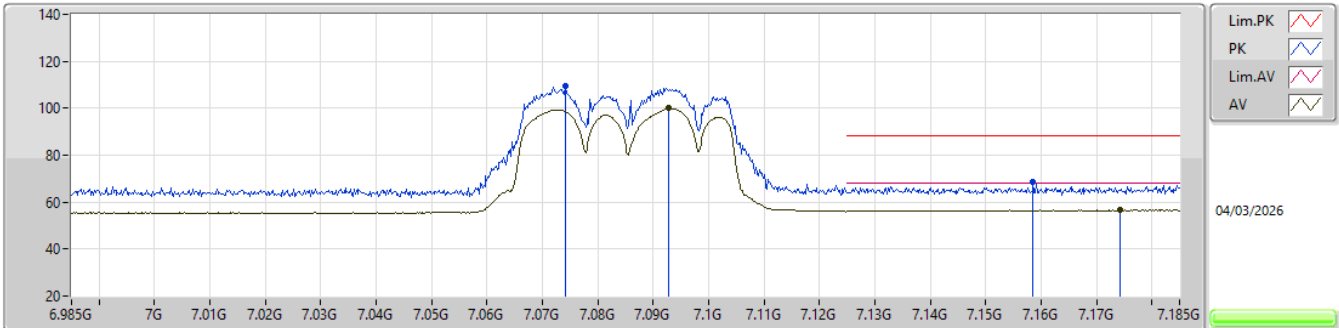


EUT_Y_4TX
Setting 13.5
01-C-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0742G	109.35	Inf	-Inf	94.56	3	Horizontal	279	1.80	-	36.35	11.16	32.72			
RMS	7.0928G	99.92	Inf	-Inf	84.95	3	Horizontal	279	1.80	-	36.46	11.22	32.71			
PK	7.1586G	68.84	88.20	-19.36	53.30	3	Horizontal	279	1.80	-	36.83	11.40	32.69			
RMS	7.1742G	56.69	68.20	-11.51	41.03	3	Horizontal	279	1.80	-	36.90	11.44	32.68			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7085MHz_TX

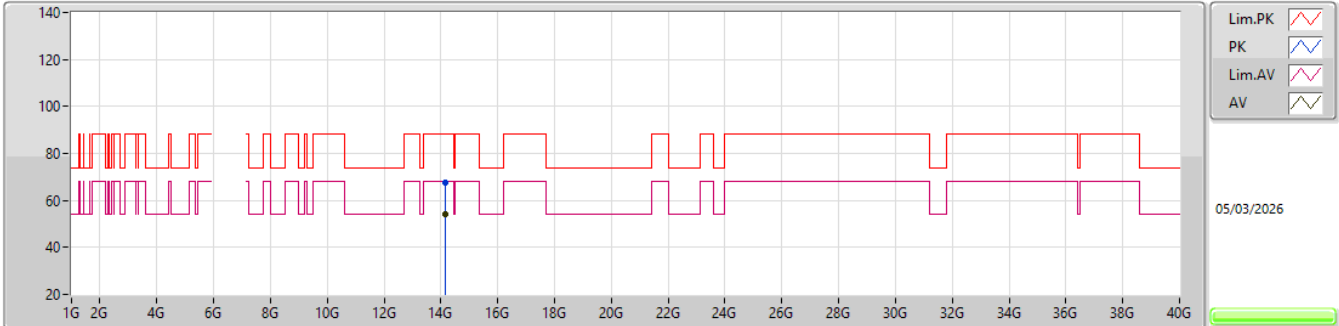


EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.17453G	67.56	88.20	-20.64	56.48	3	Vertical	18	1.80	-	40.80	15.29	45.01			
RMS	14.17408G	54.27	68.20	-13.93	43.19	3	Vertical	18	1.80	-	40.80	15.29	45.01			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7085MHz_TX

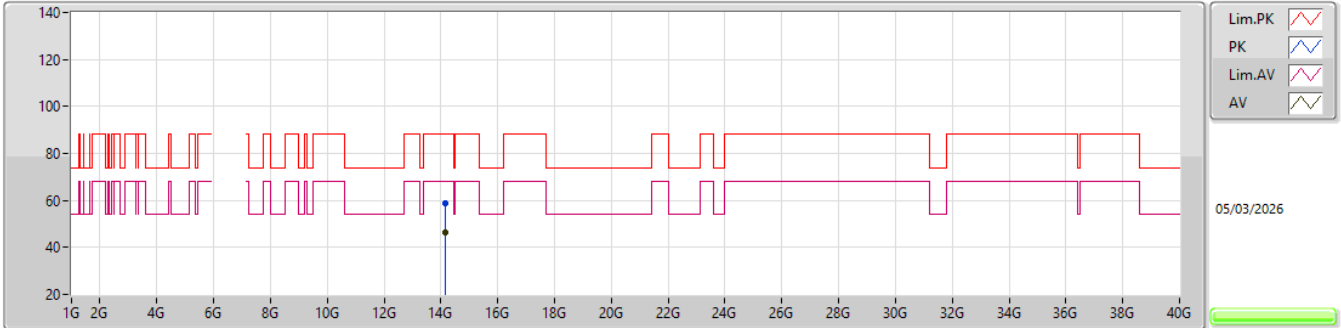


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.16025G	58.89	88.20	-29.31	47.82	3	Horizontal	333	1.12	-	40.80	15.29	45.02			
RMS	14.16001G	46.21	68.20	-21.99	35.14	3	Horizontal	333	1.12	-	40.80	15.29	45.02			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7085MHz_TX

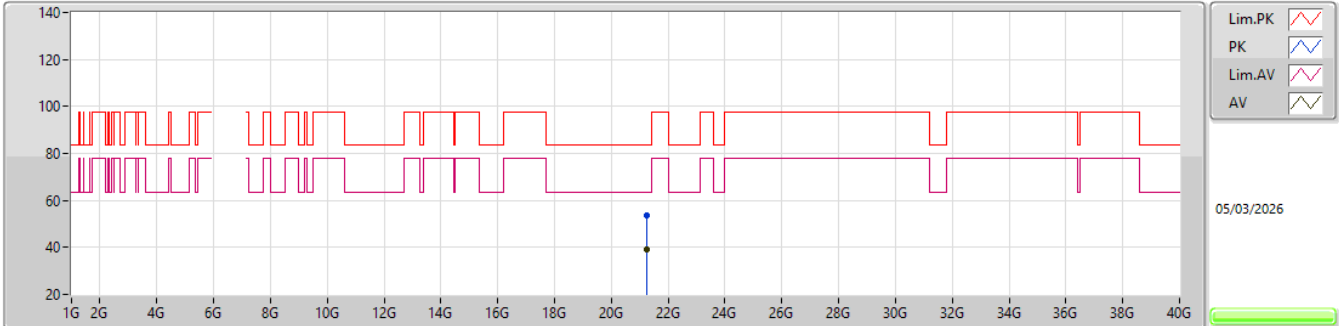


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.2511G	53.43	83.54	-30.11	46.90	1	Vertical	312	1.22	-	37.89	17.44	48.80			
AV	21.25148G	39.36	63.54	-24.18	32.83	1	Vertical	312	1.22	-	37.89	17.44	48.80			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7085MHz_TX

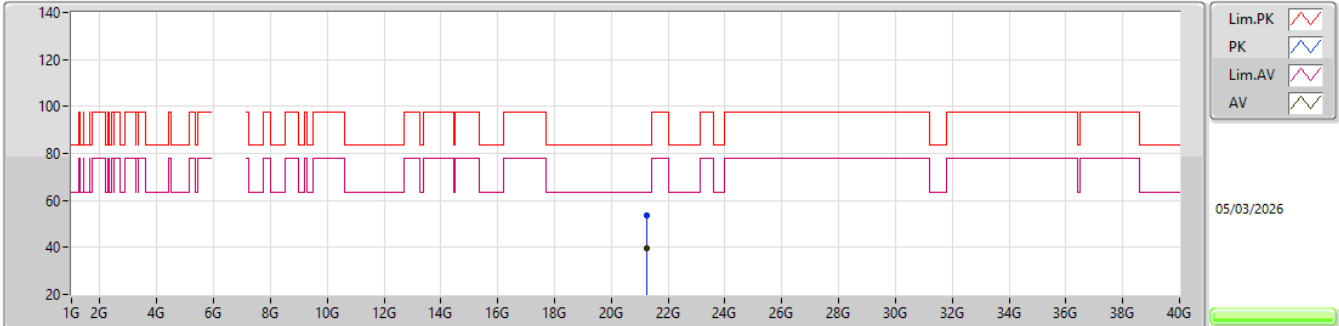


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.25448G	53.55	83.54	-29.99	47.04	1	Horizontal	109	2.04	-	37.87	17.44	48.80			
AV	21.25152G	39.42	63.54	-24.12	32.89	1	Horizontal	109	2.04	-	37.89	17.44	48.80			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

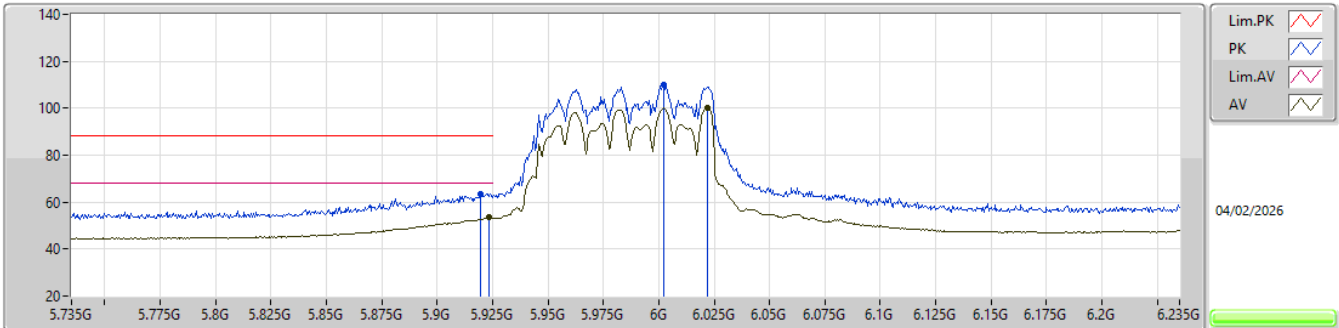


EUT Y_4TX
Setting 18
04-W-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9195G	63.49	88.20	-24.71	65.44	3	Vertical	355	1.80	-	32.40	9.05	43.40			
RMS	5.9235G	53.41	68.20	-14.79	55.36	3	Vertical	355	1.80	-	32.40	9.05	43.40			
PK	6.002G	109.88	Inf	-Inf	111.68	3	Vertical	355	1.80	-	32.40	9.14	43.34			
RMS	6.022G	100.11	Inf	-Inf	101.85	3	Vertical	355	1.80	-	32.44	9.15	43.33			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

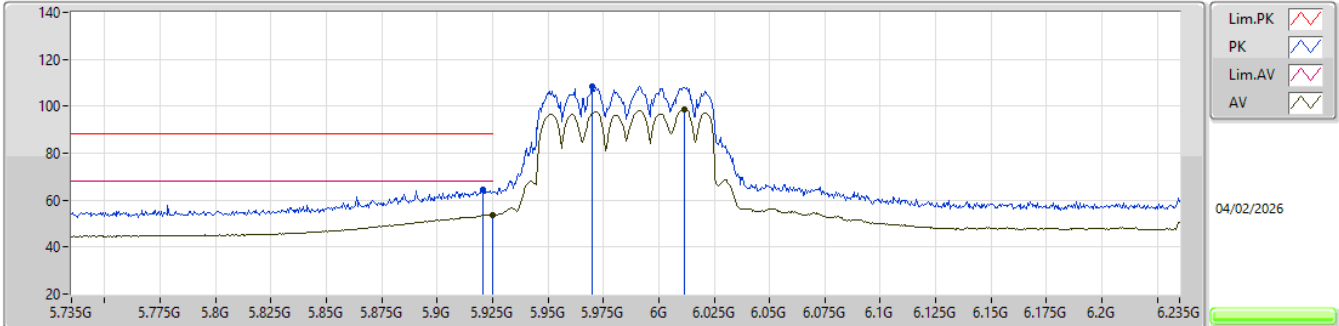


EUT Y_4TX
Setting 18
04-W-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9205G	64.46	88.20	-23.74	66.41	3	Horizontal	288.4	1.78	-	32.40	9.05	43.40			
RMS	5.925G	53.78	68.20	-14.42	55.73	3	Horizontal	288.4	1.78	-	32.40	9.05	43.40			
PK	5.97G	108.42	Inf	-Inf	110.27	3	Horizontal	288.4	1.78	-	32.40	9.11	43.36			
RMS	6.0115G	98.75	Inf	-Inf	100.51	3	Horizontal	288.4	1.78	-	32.42	9.15	43.33			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

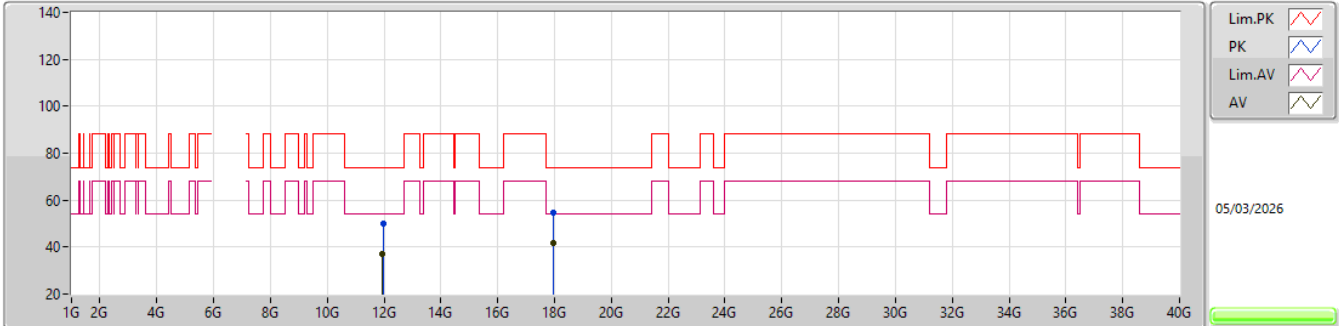


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.96268G	49.94	74.00	-24.06	42.20	3	Vertical	51	1.80	-	38.70	15.00	45.96			
AV	11.95503G	36.86	54.00	-17.14	29.11	3	Vertical	51	1.80	-	38.70	15.00	45.95			
PK	17.96169G	54.87	74.00	-19.13	40.39	3	Vertical	62	2.11	-	43.85	15.90	45.27			
AV	17.94465G	41.76	54.00	-12.24	27.37	3	Vertical	62	2.11	-	43.76	15.90	45.27			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

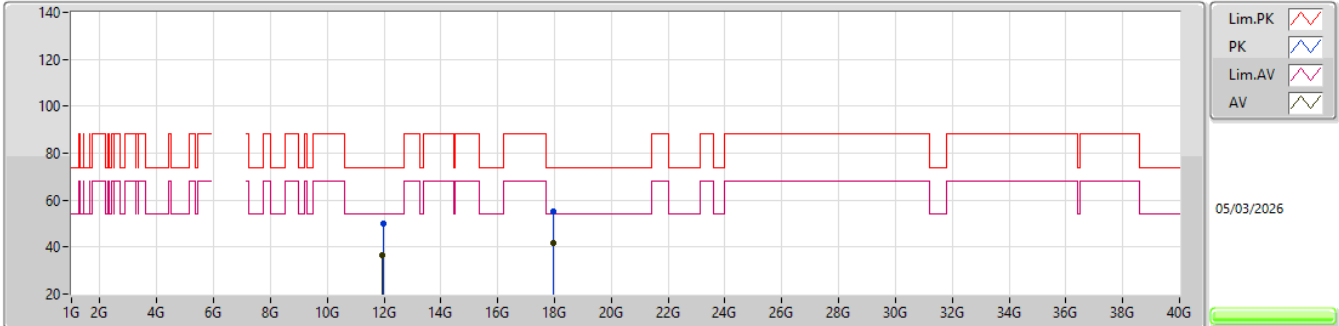


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.95695G	50.20	74.00	-23.80	42.46	3	Horizontal	275	1.53	-	38.70	15.00	45.96			
AV	11.955G	36.79	54.00	-17.21	29.04	3	Horizontal	275	1.53	-	38.70	15.00	45.95			
PK	17.96769G	55.18	74.00	-18.82	40.68	3	Horizontal	130	2.15	-	43.87	15.90	45.27			
AV	17.95545G	41.53	54.00	-12.47	27.08	3	Horizontal	130	2.15	-	43.82	15.90	45.27			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

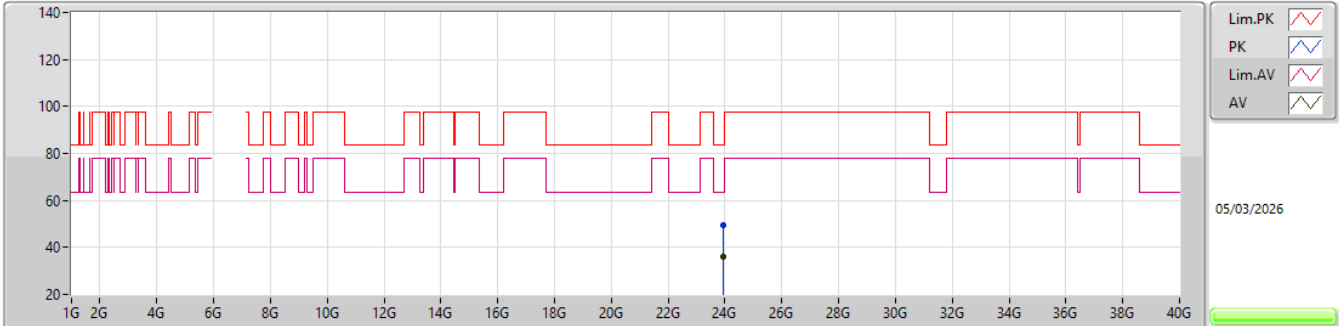


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.94066G	49.44	83.54	-34.10	40.50	1	Vertical	15	2.02	-	38.98	17.86	47.90			
AV	23.94298G	35.96	63.54	-27.58	27.01	1	Vertical	15	2.02	-	38.99	17.86	47.90			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

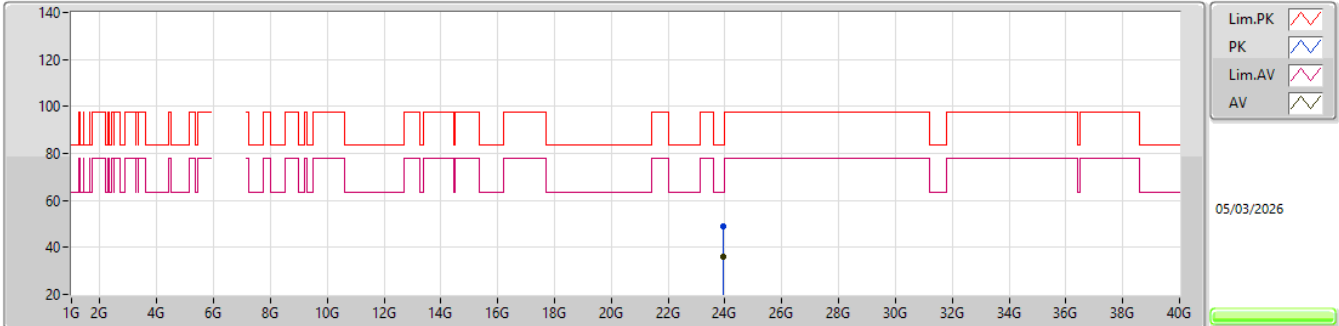


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.93766G	49.06	83.54	-34.48	40.12	1	Horizontal	170	2.23	-	38.98	17.86	47.90			
AV	23.93697G	35.97	63.54	-27.57	27.04	1	Horizontal	170	2.23	-	38.97	17.86	47.90			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6225MHz_TX

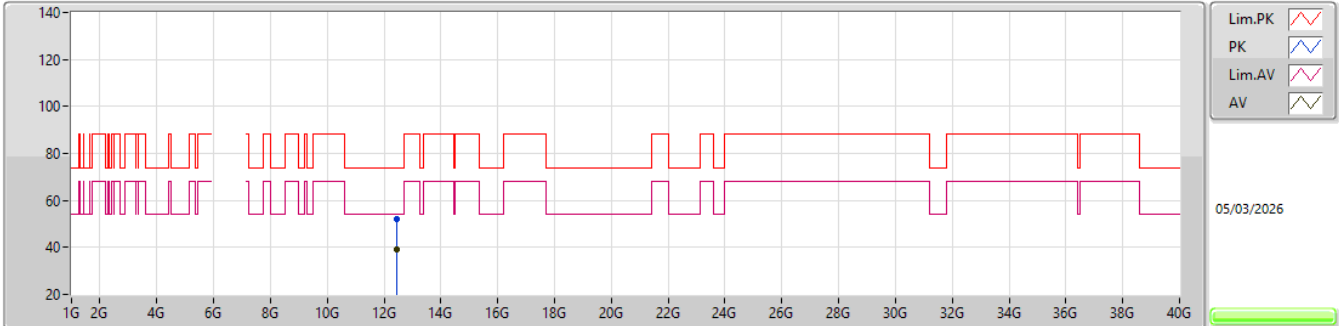


EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.44226G	51.99	74.00	-22.01	43.75	3	Vertical	32	1.80	-	38.68	15.08	45.52			
AV	12.45009G	39.00	54.00	-15.00	30.73	3	Vertical	32	1.80	-	38.70	15.08	45.51			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6225MHz_TX

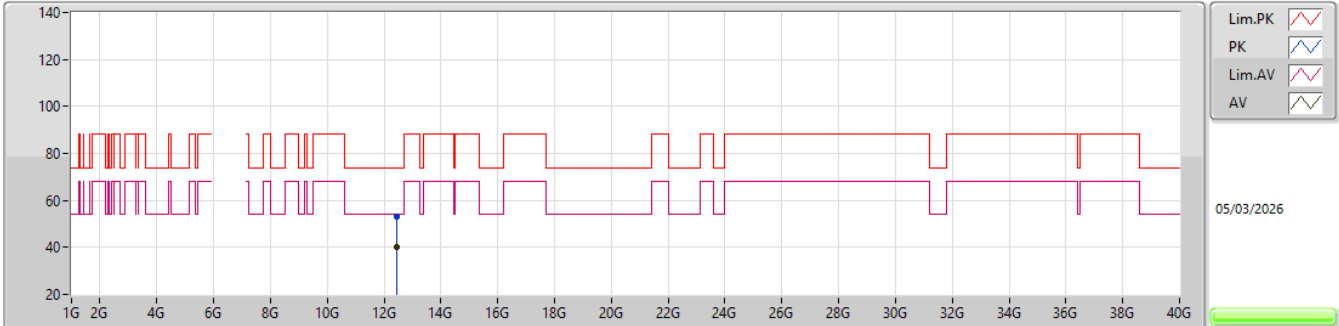


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.45147G	52.97	74.00	-21.03	44.69	3	Horizontal	46	3.00	-	38.71	15.08	45.51			
AV	12.4521G	40.23	54.00	-13.77	31.95	3	Horizontal	46	3.00	-	38.71	15.08	45.51			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6225MHz_TX

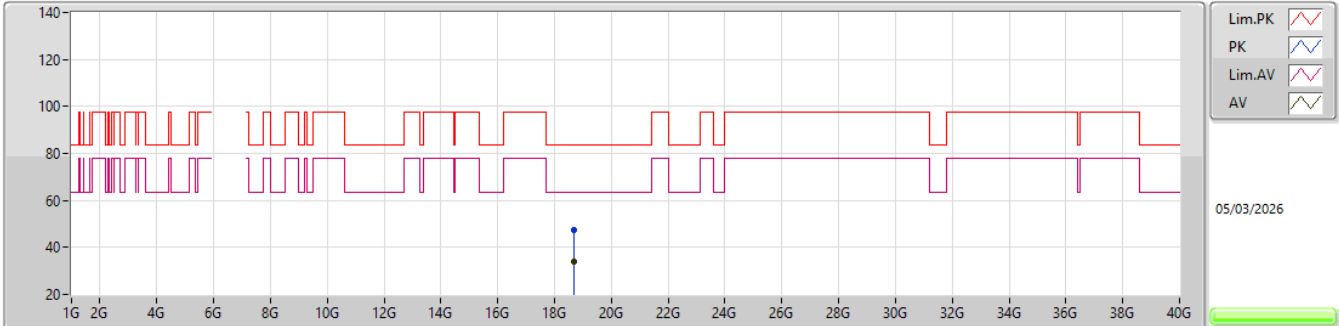


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67586G	47.21	83.54	-36.33	42.16	1	Vertical	327	1.84	-	37.55	16.21	48.71			
AV	18.67312G	34.15	63.54	-29.39	29.09	1	Vertical	327	1.84	-	37.55	16.21	48.70			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6225MHz_TX

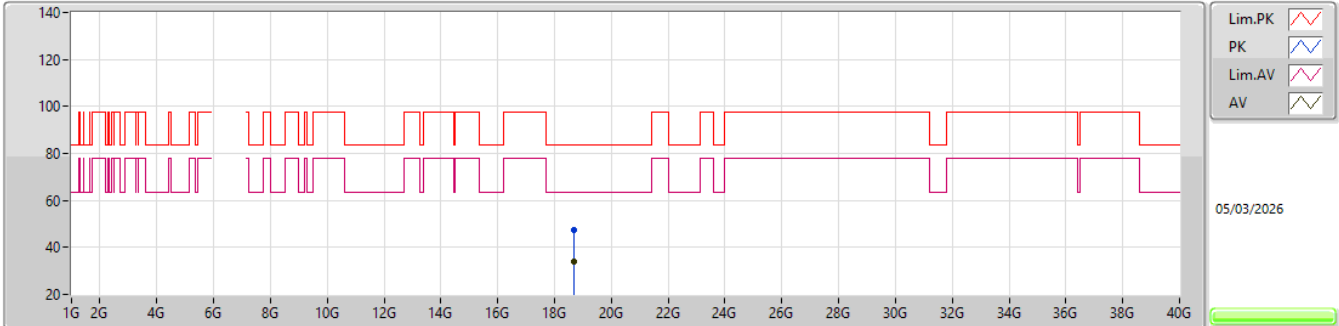


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67532G	47.61	83.54	-35.93	42.56	1	Horizontal	19	1.30	-	37.55	16.21	48.71			
AV	18.67306G	33.98	63.54	-29.56	28.92	1	Horizontal	19	1.30	-	37.55	16.21	48.70			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6385MHz_TX

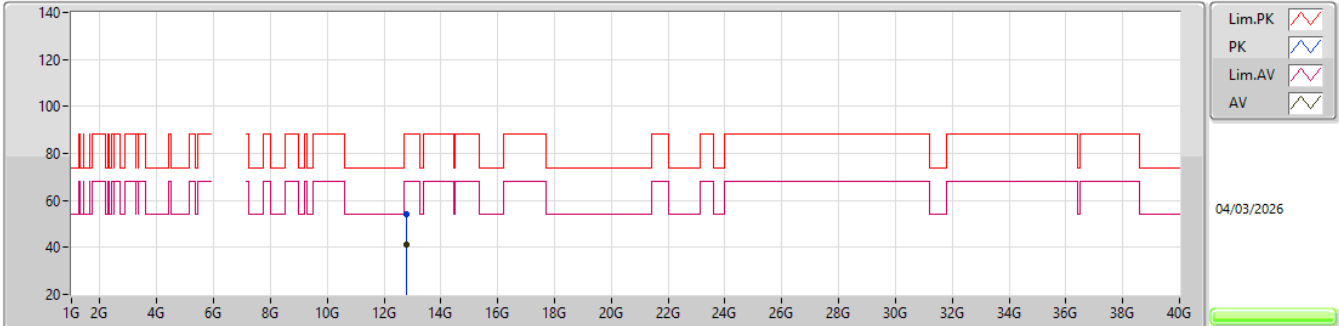


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.77087G	53.94	88.20	-34.26	44.80	3	Vertical	357	1.80	-	39.73	15.12	45.71			
RMS	12.76997G	41.16	68.20	-27.04	32.03	3	Vertical	357	1.80	-	39.72	15.12	45.71			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6385MHz_TX

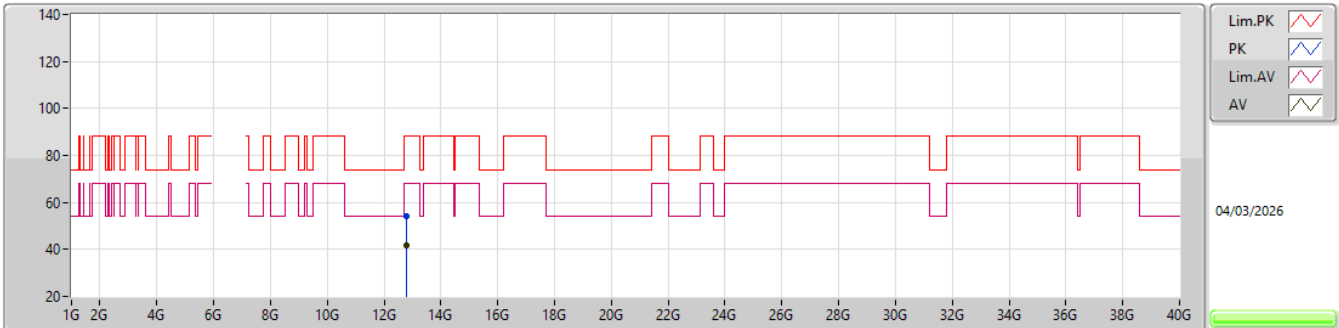


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.76859G	54.17	88.20	-34.03	45.05	3	Horizontal	112	1.80	-	39.71	15.12	45.71			
RMS	12.76847G	41.50	68.20	-26.70	32.38	3	Horizontal	112	1.80	-	39.71	15.12	45.71			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6385MHz_TX

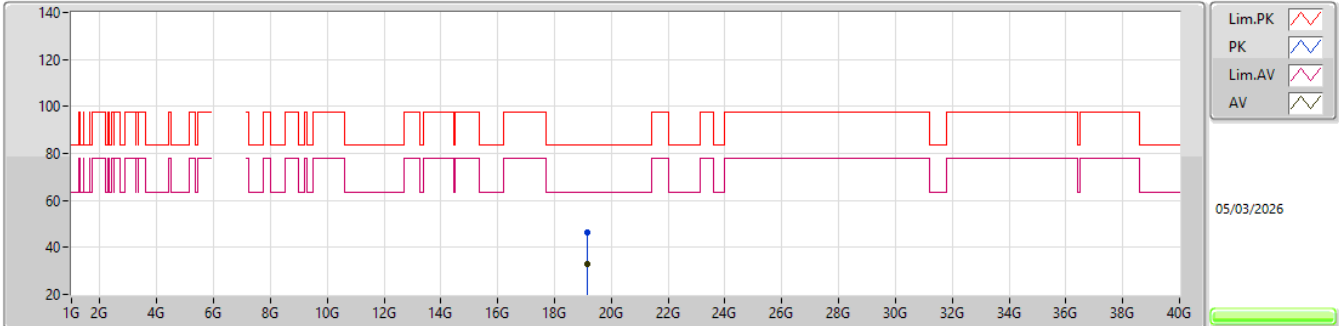


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.1569G	46.34	83.54	-37.20	40.95	1	Vertical	220	2.17	-	37.77	16.49	48.87			
AV	19.1507G	33.01	63.54	-30.53	27.59	1	Vertical	220	2.17	-	37.80	16.49	48.87			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6385MHz_TX

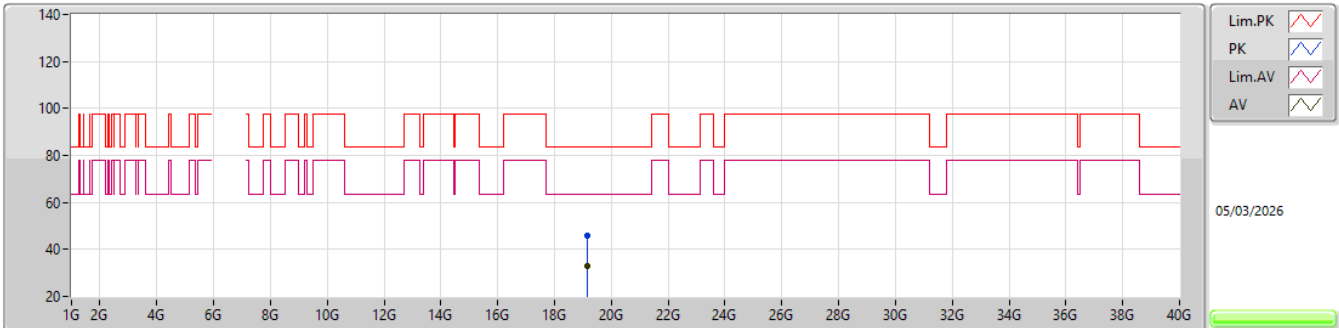EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15626G	45.63	83.54	-37.91	40.24	1	Horizontal	291	2.59	-	37.77	16.49	48.87			
AV	19.15378G	32.98	63.54	-30.56	27.58	1	Horizontal	291	2.59	-	37.78	16.49	48.87			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6465MHz_TX

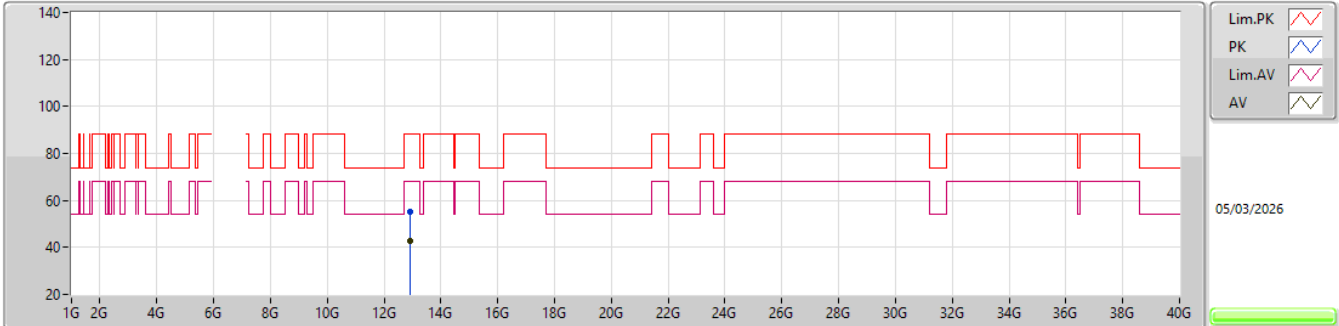


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9384G	55.41	88.20	-32.79	45.98	3	Vertical	325	1.78	-	40.15	15.14	45.86			
RMS	12.93702G	42.97	68.20	-25.23	33.54	3	Vertical	325	1.78	-	40.15	15.14	45.86			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6465MHz_TX

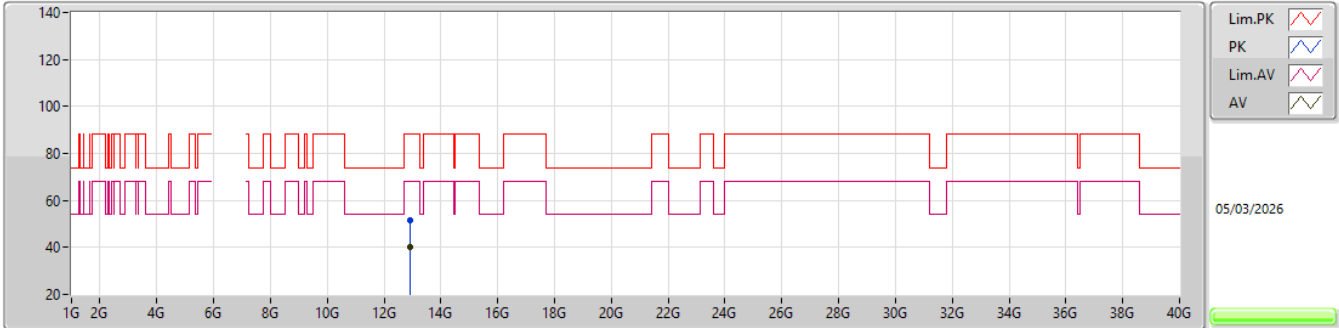


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92943G	51.75	88.20	-36.45	42.35	3	Horizontal	12	2.76	-	40.12	15.14	45.86			
RMS	12.93138G	40.05	68.20	-28.15	30.64	3	Horizontal	12	2.76	-	40.13	15.14	45.86			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6465MHz_TX

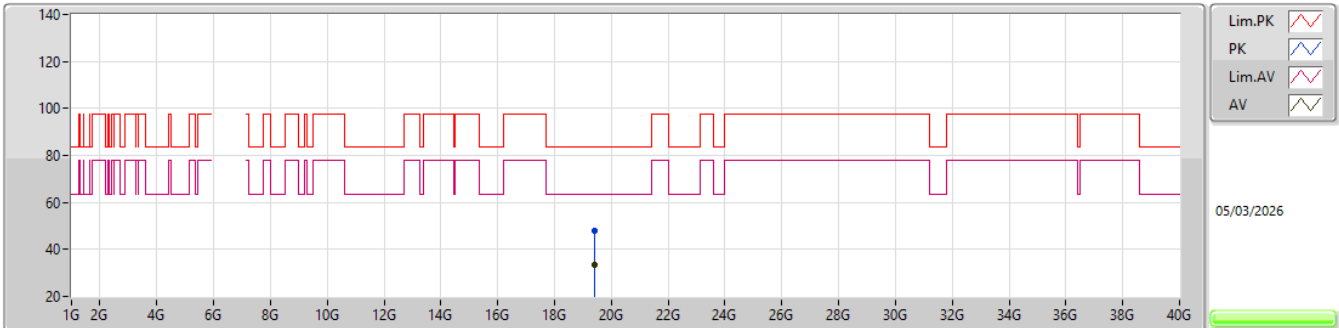


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.39628G	47.75	83.54	-35.79	42.34	1	Vertical	259	2.35	-	37.70	16.53	48.82			
AV	19.39354G	33.68	63.54	-29.86	28.27	1	Vertical	259	2.35	-	37.70	16.53	48.82			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6465MHz_TX

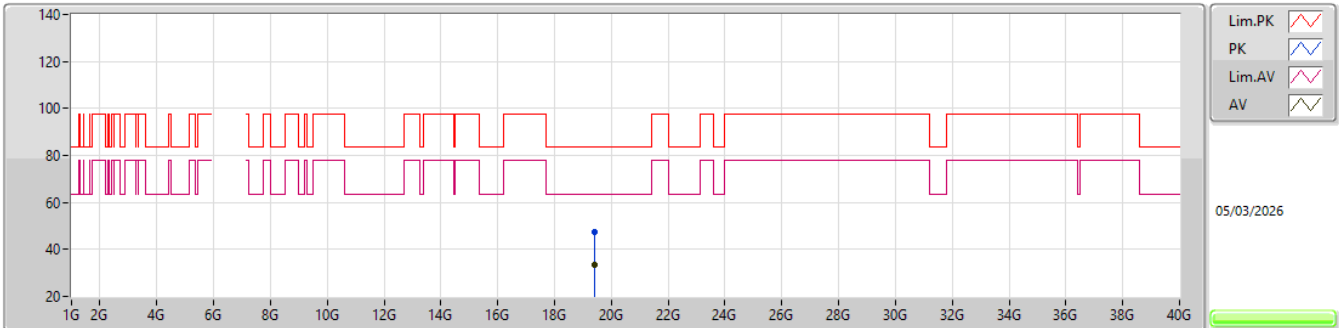EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.39302G	47.19	83.54	-36.35	41.78	1	Horizontal	184	1.01	-	37.70	16.53	48.82			
AV	19.3955G	33.47	63.54	-30.07	28.06	1	Horizontal	184	1.01	-	37.70	16.53	48.82			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6545MHz_TX

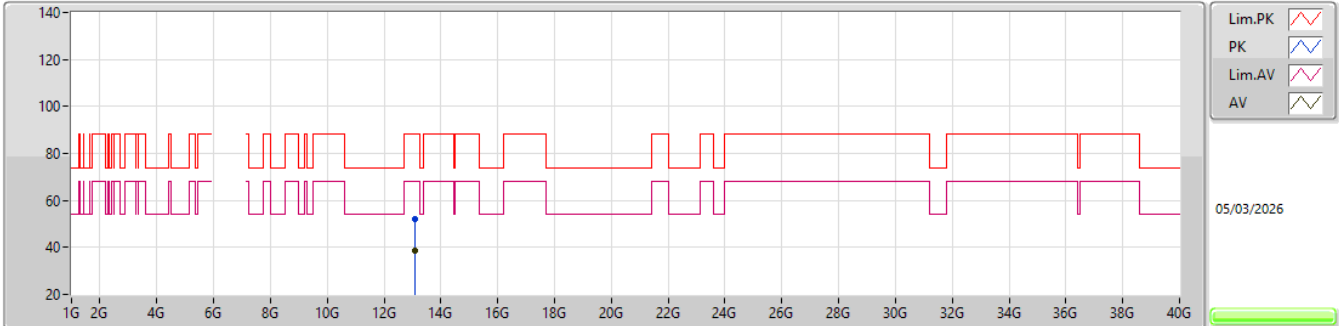


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09432G	51.85	88.20	-36.35	42.54	3	Vertical	20	1.80	-	39.90	15.16	45.75			
RMS	13.09579G	38.78	68.20	-29.42	29.47	3	Vertical	20	1.80	-	39.90	15.16	45.75			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6545MHz_TX

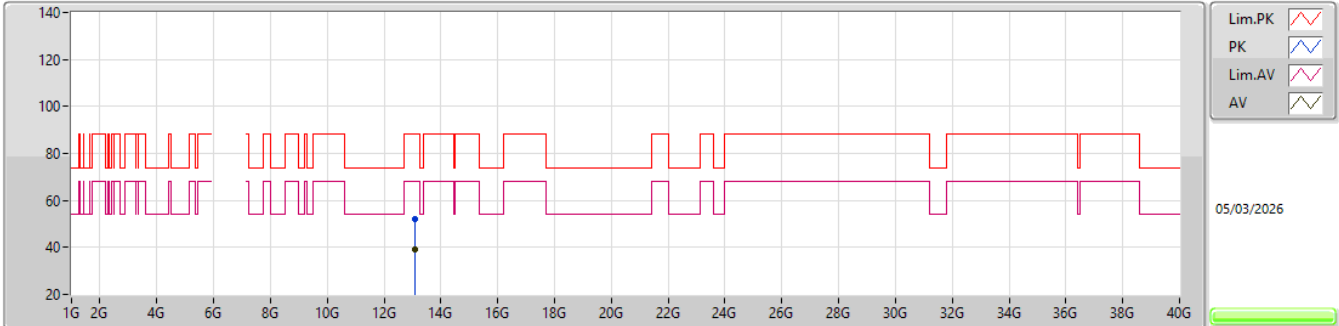


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09306G	52.10	88.20	-36.10	42.79	3	Horizontal	263	1.50	-	39.90	15.16	45.75			
RMS	13.09552G	39.13	68.20	-29.07	29.82	3	Horizontal	263	1.50	-	39.90	15.16	45.75			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6545MHz_TX

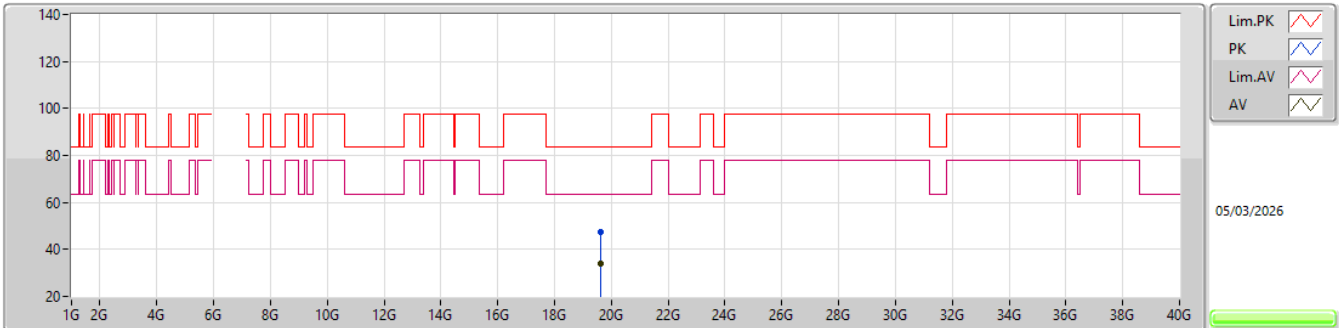EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63732G	47.55	83.54	-35.99	42.30	1	Vertical	237	2.37	-	37.53	16.57	48.85			
AV	19.6348G	34.10	63.54	-29.44	28.85	1	Vertical	237	2.37	-	37.53	16.57	48.85			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6545MHz_TX

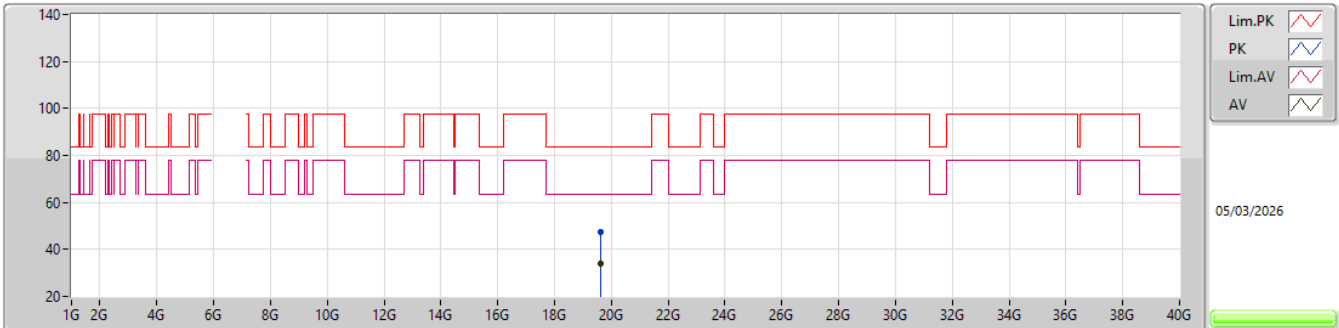EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63792G	47.38	83.54	-36.16	42.15	1	Horizontal	311	1.76	-	37.52	16.57	48.86			
AV	19.63706G	33.99	63.54	-29.55	28.74	1	Horizontal	311	1.76	-	37.53	16.57	48.85			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6625MHz_TX

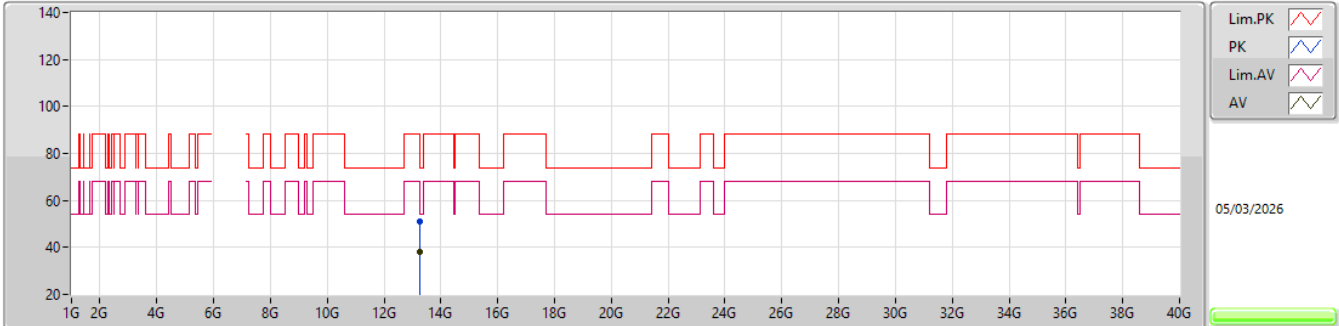


EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.25369G	50.93	74.00	-23.07	41.20	3	Vertical	15	1.80	-	40.01	15.18	45.46			
AV	13.25402G	38.00	54.00	-16.00	28.26	3	Vertical	15	1.80	-	40.02	15.18	45.46			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6625MHz_TX

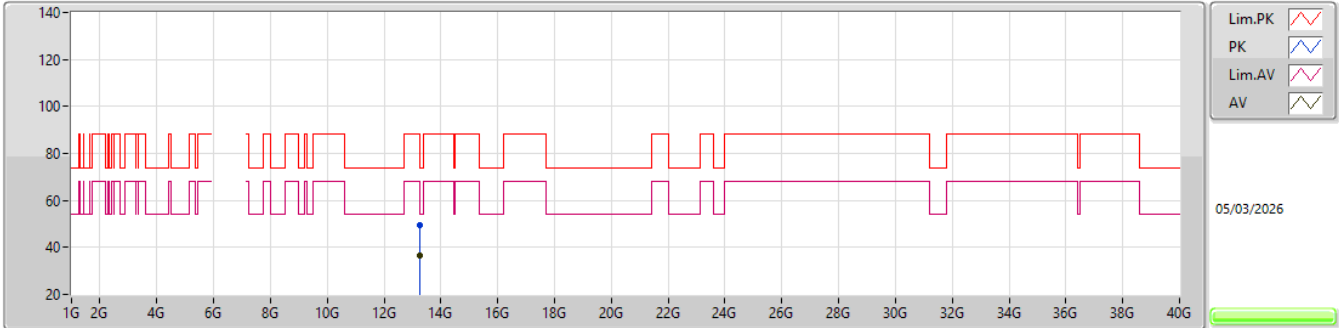


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.25369G	49.46	74.00	-24.54	39.73	3	Horizontal	328	1.80	-	40.01	15.18	45.46			
AV	13.25369G	36.47	54.00	-17.53	26.74	3	Horizontal	328	1.80	-	40.01	15.18	45.46			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6625MHz_TX

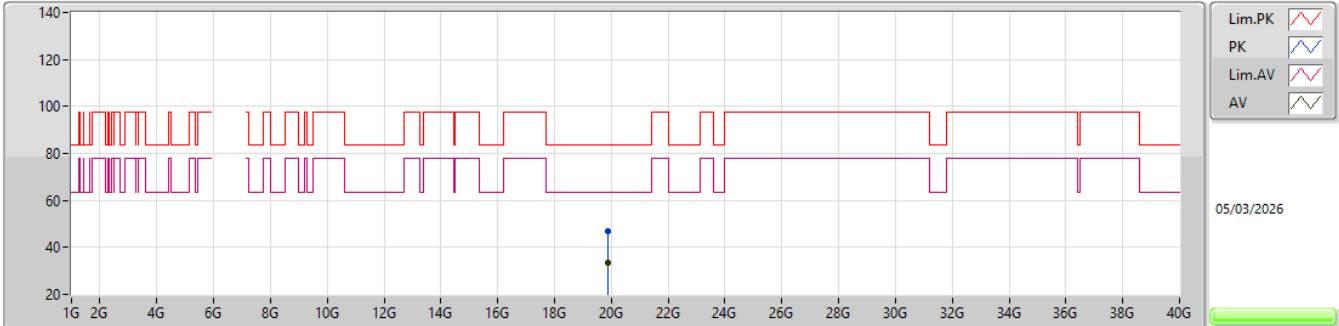


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87366G	46.93	83.54	-36.61	41.67	1	Vertical	237	2.26	-	37.61	16.60	48.95			
AV	19.87022G	33.25	63.54	-30.29	27.98	1	Vertical	237	2.26	-	37.62	16.60	48.95			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6625MHz_TX

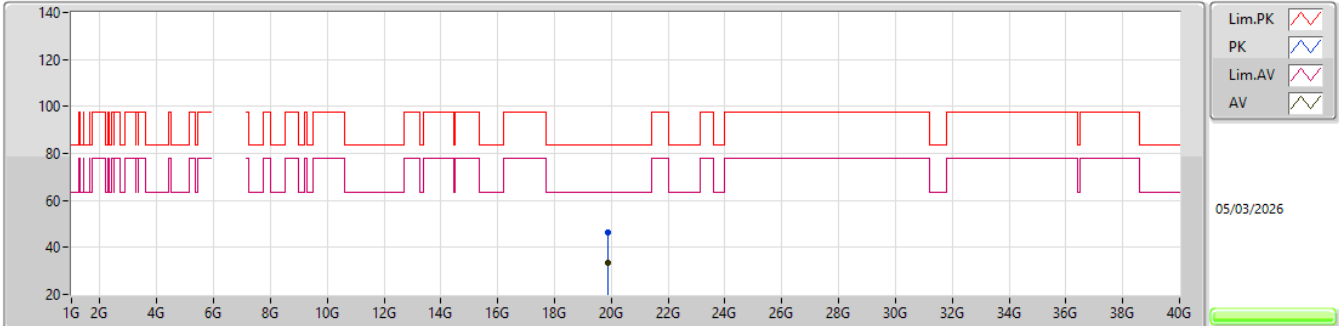


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87734G	46.23	83.54	-37.31	40.99	1	Horizontal	324	1.47	-	37.59	16.60	48.95			
AV	19.87G	33.33	63.54	-30.21	28.06	1	Horizontal	324	1.47	-	37.62	16.60	48.95			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6705MHz_TX

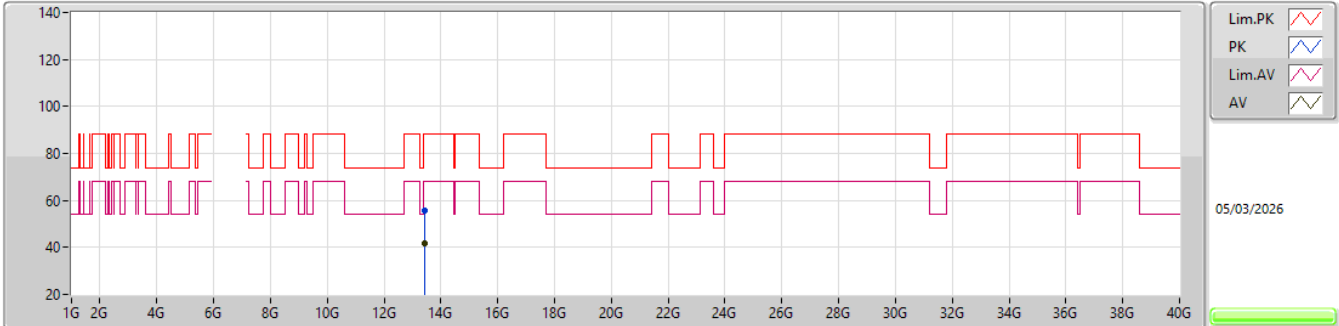


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41342G	55.50	88.20	-32.70	45.02	3	Vertical	6	1.80	-	40.45	15.20	45.17			
RMS	13.41441G	41.77	68.20	-26.43	31.28	3	Vertical	6	1.80	-	40.46	15.20	45.17			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6705MHz_TX

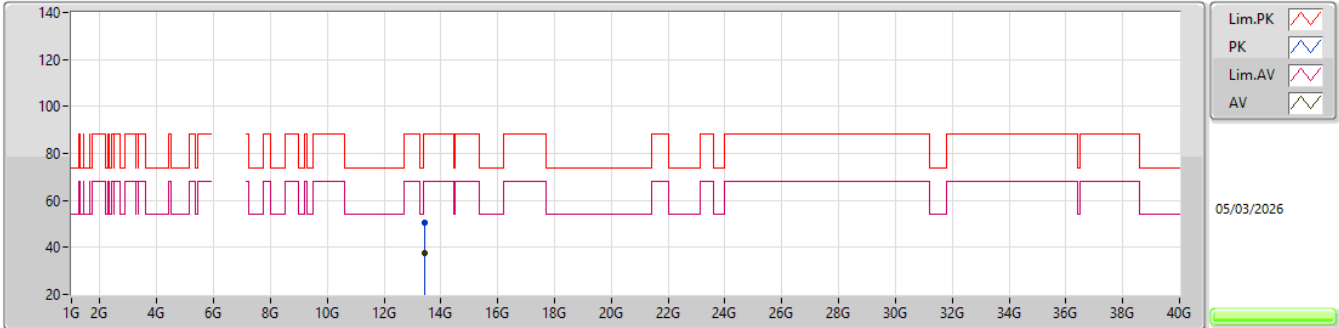


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4091G	50.53	88.20	-37.67	40.07	3	Horizontal	88	1.80	-	40.44	15.20	45.18			
RMS	13.4097G	37.50	68.20	-30.70	27.03	3	Horizontal	88	1.80	-	40.44	15.20	45.17			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6705MHz_TX

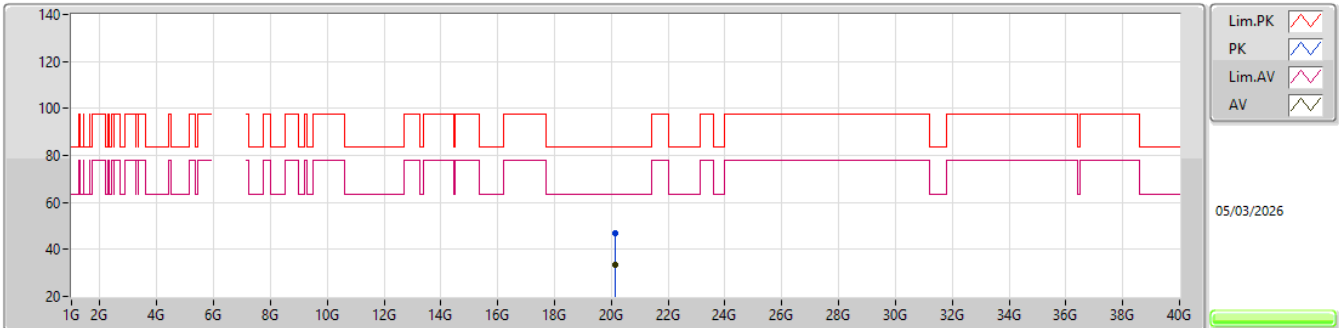


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.11594G	46.78	83.54	-36.76	41.73	1	Vertical	237	2.89	-	37.30	16.73	48.98			
AV	20.11718G	33.57	63.54	-29.97	28.52	1	Vertical	237	2.89	-	37.30	16.73	48.98			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6705MHz_TX

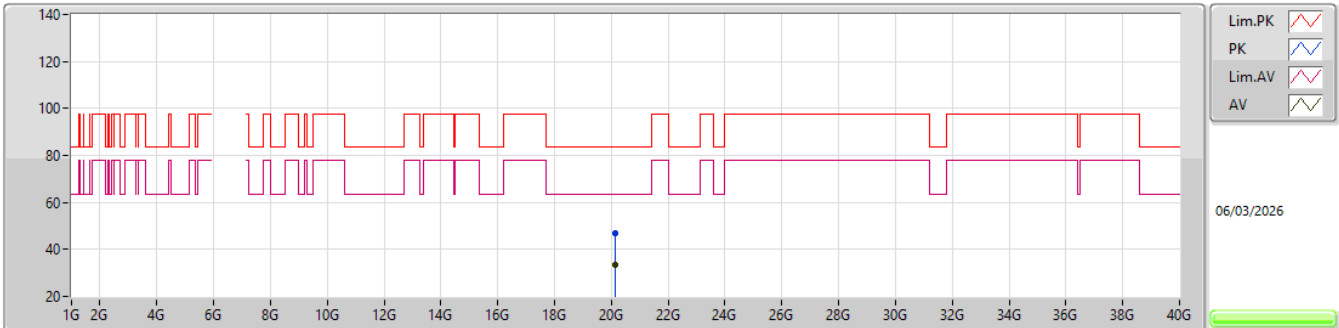EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11792G	46.79	83.54	-36.75	41.74	1	Horizontal	270	1.41	-	37.30	16.73	48.98			
AV	20.11712G	33.62	63.54	-29.92	28.57	1	Horizontal	270	1.41	-	37.30	16.73	48.98			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6785MHz_TX

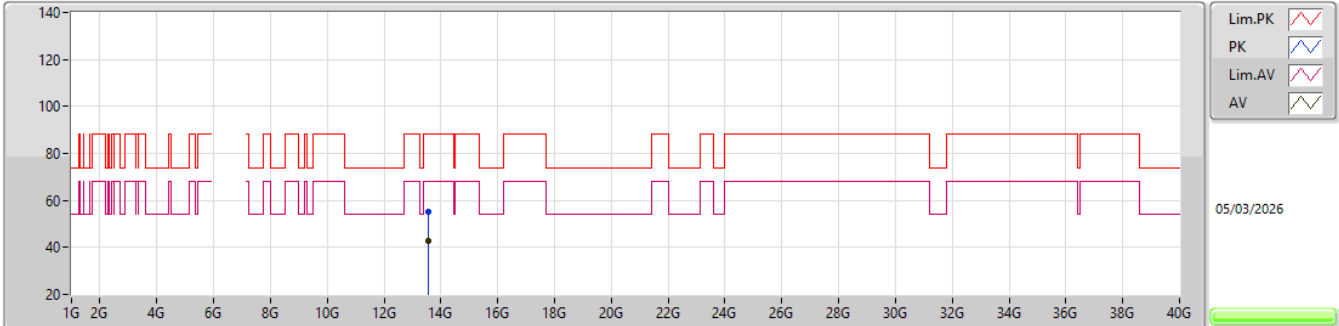


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.57489G	54.96	88.20	-33.24	43.92	3	Vertical	27	1.80	-	40.85	15.22	45.03			
RMS	13.57393G	42.60	68.20	-25.60	31.55	3	Vertical	27	1.80	-	40.86	15.22	45.03			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6785MHz_TX

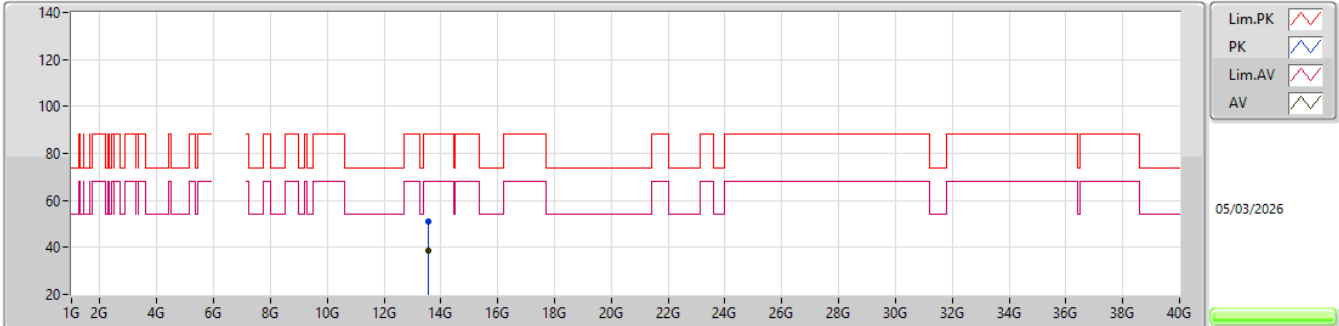


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.56319G	51.13	88.20	-37.07	40.01	3	Horizontal	197	2.90	-	40.92	15.22	45.02			
RMS	13.57003G	38.85	68.20	-29.35	27.78	3	Horizontal	197	2.90	-	40.88	15.22	45.03			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6785MHz_TX

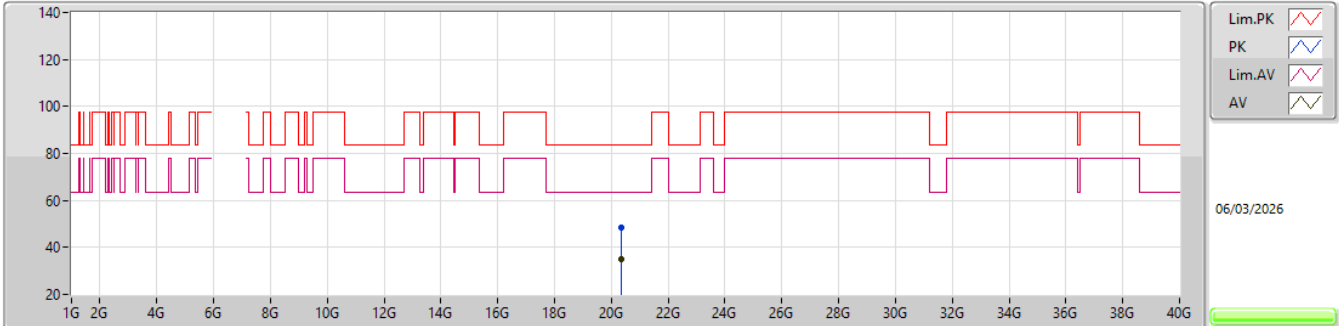EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.35586G	48.33	83.54	-35.21	42.82	1	Vertical	214	1.06	-	37.50	16.94	48.93			
AV	20.35064G	34.77	63.54	-28.77	29.26	1	Vertical	214	1.06	-	37.50	16.94	48.93			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6785MHz_TX

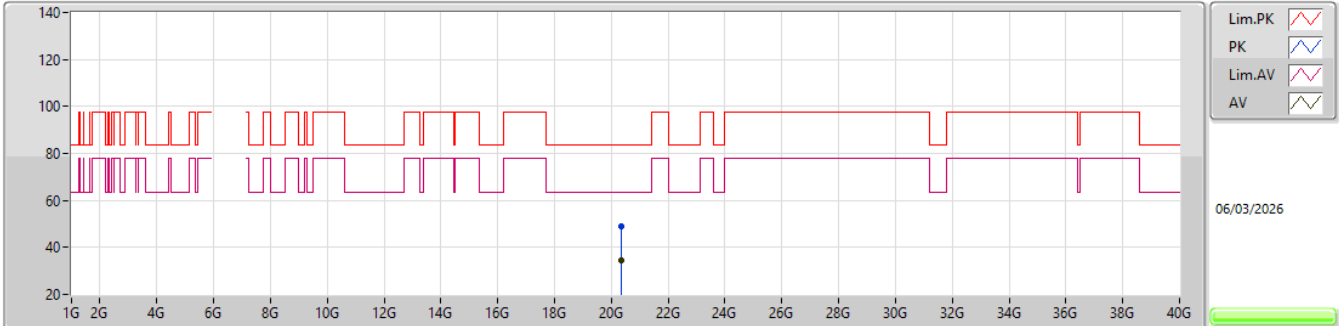


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.35674G	48.78	83.54	-34.76	43.27	1	Horizontal	231	2.04	-	37.50	16.94	48.93			
AV	20.35146G	34.73	63.54	-28.81	29.22	1	Horizontal	231	2.04	-	37.50	16.94	48.93			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6865MHz_TX

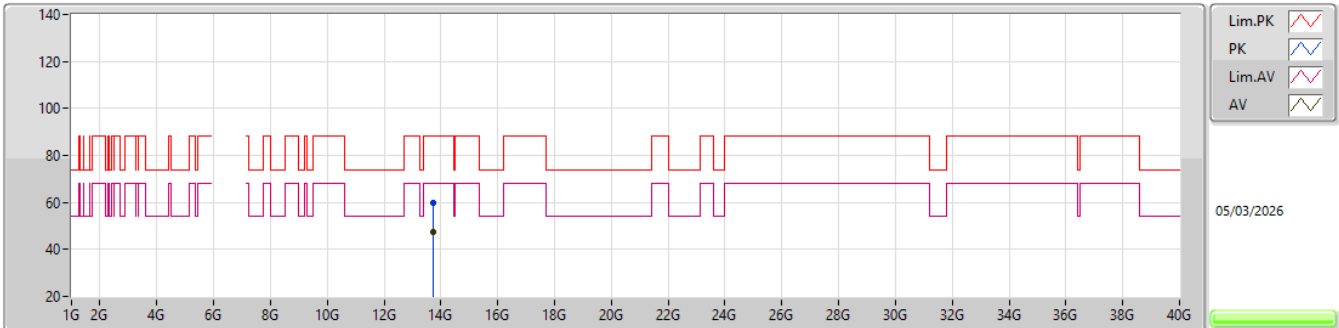


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.73312G	59.74	88.20	-28.46	48.92	3	Vertical	8	1.80	-	40.63	15.25	45.06			
RMS	13.7336G	47.59	68.20	-20.61	36.77	3	Vertical	8	1.80	-	40.63	15.25	45.06			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6865MHz_TX

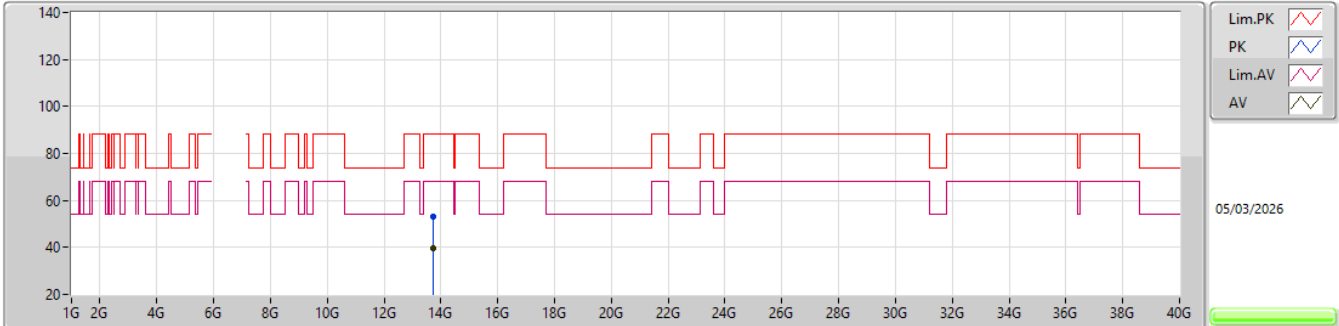


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74392G	52.85	88.20	-35.35	42.05	3	Horizontal	57	2.35	-	40.61	15.25	45.06			
RMS	13.73885G	39.43	68.20	-28.77	28.62	3	Horizontal	57	2.35	-	40.62	15.25	45.06			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6865MHz_TX

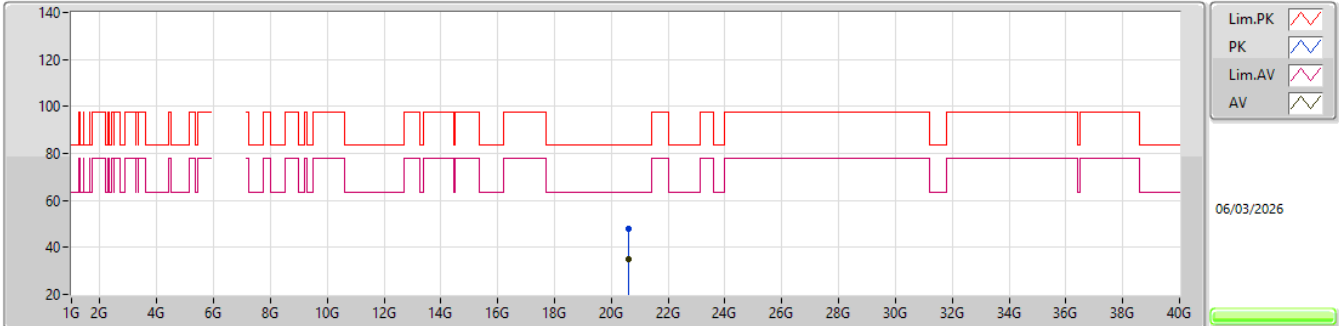


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.5927G	48.05	83.54	-35.49	42.12	1	Vertical	324	2.02	-	37.67	17.16	48.90			
AV	20.59282G	35.05	63.54	-28.49	29.12	1	Vertical	324	2.02	-	37.67	17.16	48.90			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6865MHz_TX

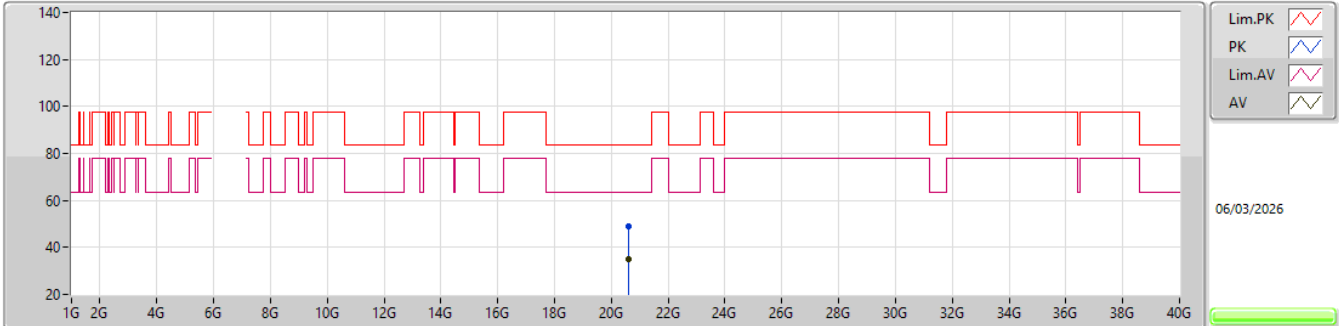


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.59332G	48.88	83.54	-34.66	42.95	1	Horizontal	19	1.54	-	37.67	17.16	48.90			
AV	20.5989G	35.08	63.54	-28.46	29.12	1	Horizontal	19	1.54	-	37.70	17.16	48.90			

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6945MHz_TX

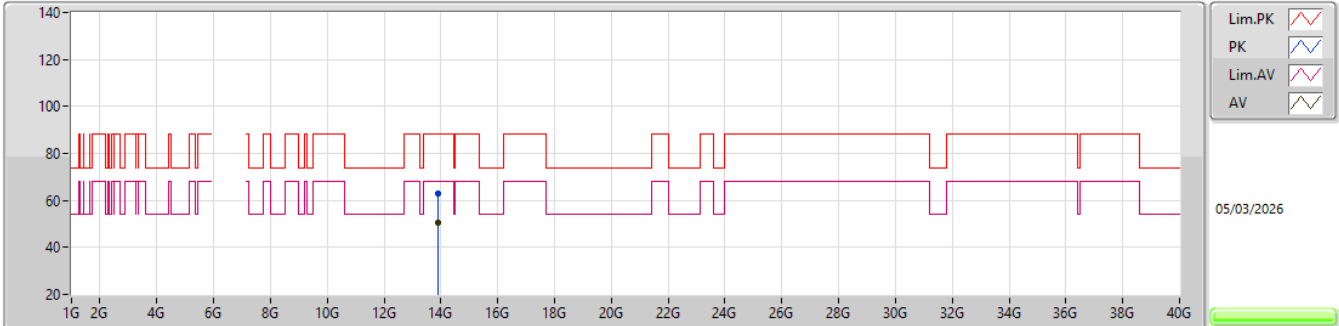


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.89384G	63.13	88.20	-25.07	52.18	3	Vertical	10	1.80	-	40.78	15.27	45.10			
RMS	13.89462G	50.40	68.20	-17.80	39.45	3	Vertical	10	1.80	-	40.78	15.27	45.10			

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6945MHz_TX

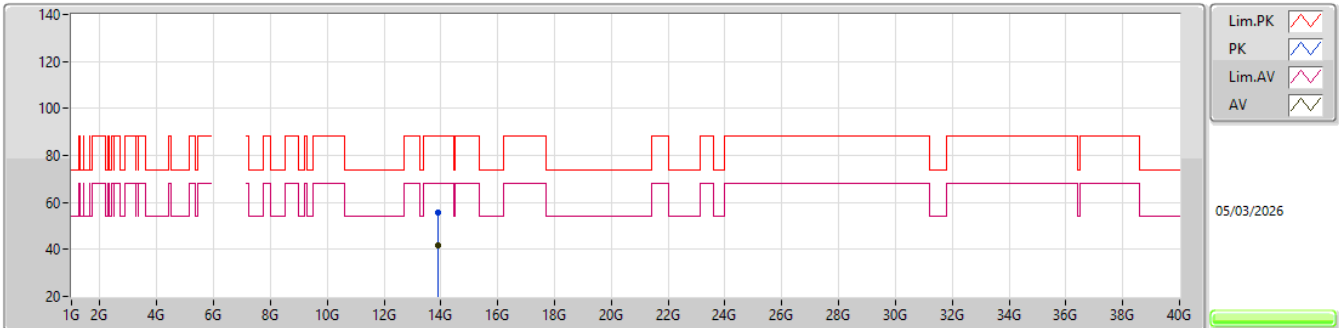


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.89342G	55.46	88.20	-32.74	44.52	3	Horizontal	297	2.90	-	40.77	15.27	45.10			
RMS	13.89183G	41.90	68.20	-26.30	30.96	3	Horizontal	297	2.90	-	40.77	15.27	45.10			

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6945MHz_TX

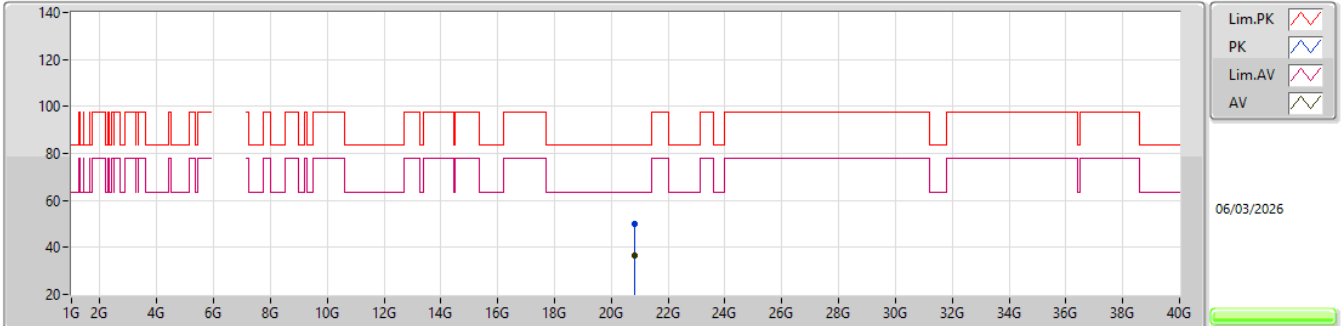


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.83522G	50.04	83.54	-33.50	43.96	1	Vertical	113	1.56	-	37.60	17.38	48.90			
AV	20.83994G	36.66	63.54	-26.88	30.58	1	Vertical	113	1.56	-	37.60	17.38	48.90			

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6945MHz_TX

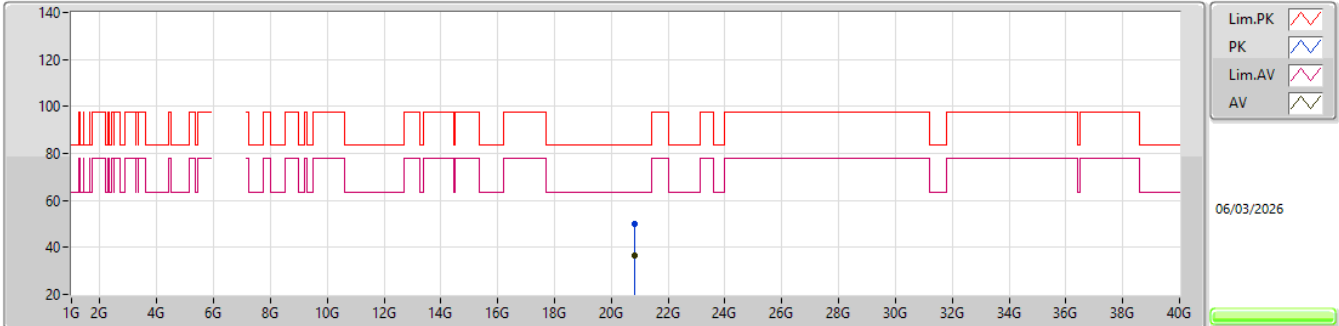


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.83096G	50.09	83.54	-33.45	44.01	1	Horizontal	280	2.24	-	37.60	17.38	48.90			
AV	20.83118G	36.54	63.54	-27.00	30.46	1	Horizontal	280	2.24	-	37.60	17.38	48.90			

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

7025MHz_TX

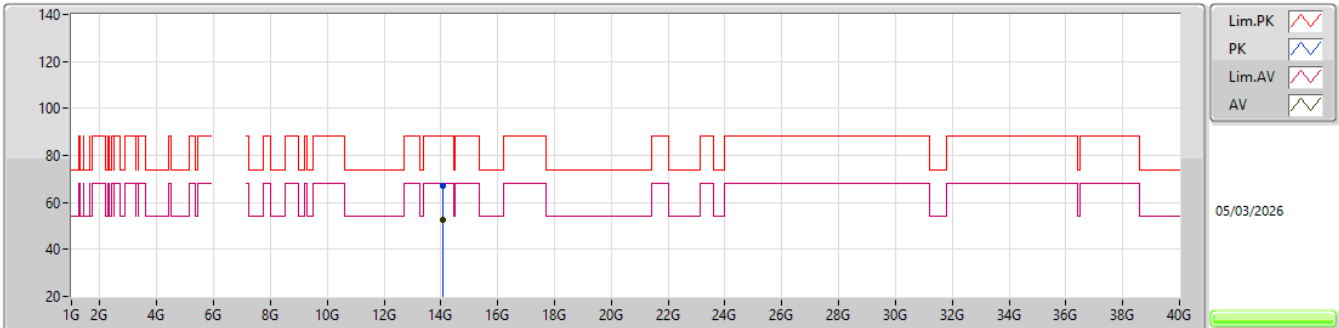


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.0545G	66.98	88.20	-21.22	55.88	3	Vertical	14	1.77	-	40.91	15.28	45.09			
RMS	14.05417G	52.79	68.20	-15.41	41.69	3	Vertical	14	1.77	-	40.91	15.28	45.09			

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

7025MHz_TX

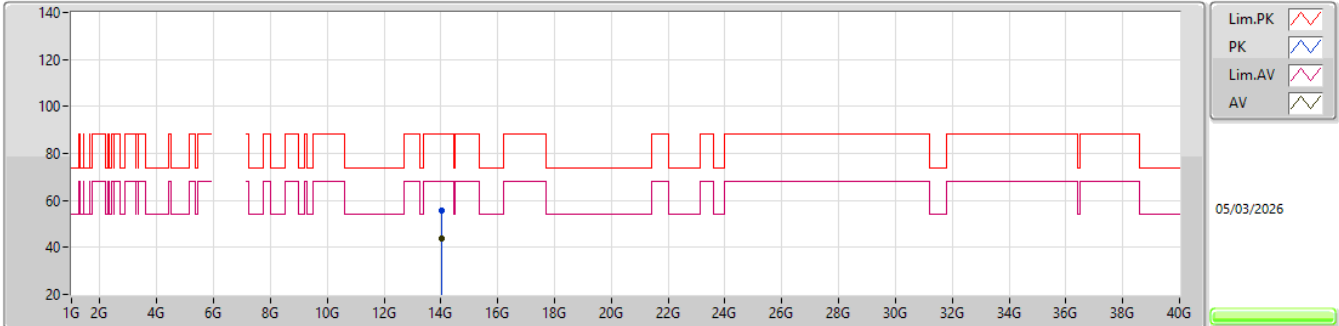


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.04769G	55.73	88.20	-32.47	44.64	3	Horizontal	28	1.80	-	40.90	15.28	45.09			
RMS	14.04013G	43.78	68.20	-24.42	32.71	3	Horizontal	28	1.80	-	40.88	15.28	45.09			

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX


7025MHz_TX

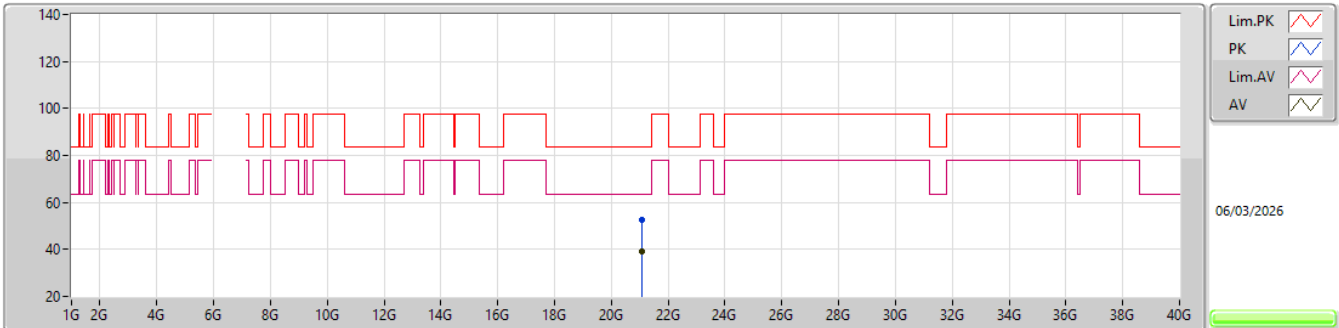EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.0757G	52.46	83.54	-31.08	46.08	1	Vertical	292	1.19	-	37.75	17.50	48.87			
AV	21.07762G	39.15	63.54	-24.39	32.78	1	Vertical	292	1.19	-	37.74	17.50	48.87			

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

7025MHz_TX

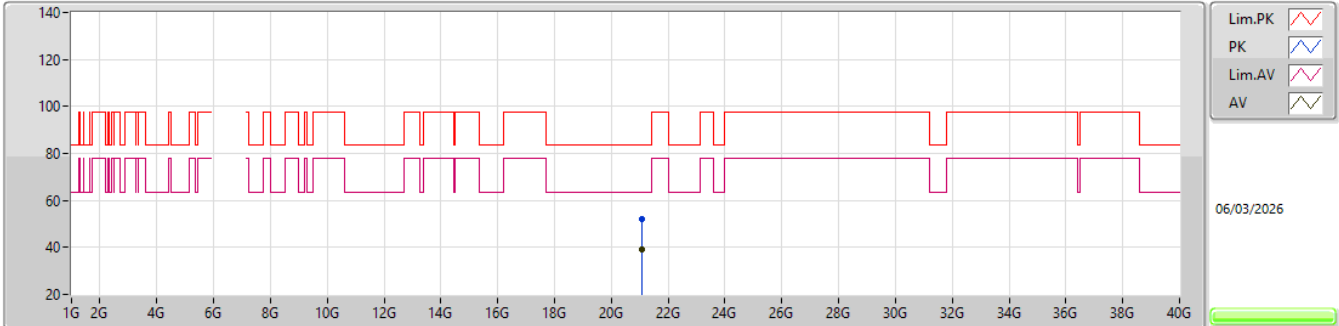


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.07492G	52.29	83.54	-31.25	45.91	1	Horizontal	137	1.25	-	37.75	17.50	48.87			
AV	21.07692G	39.17	63.54	-24.37	32.79	1	Horizontal	137	1.25	-	37.75	17.50	48.87			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

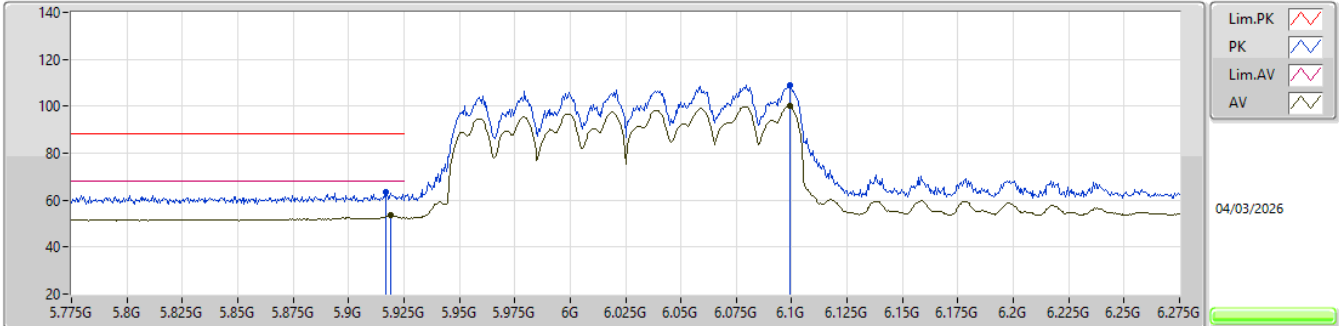


EUT_Y_4TX
Setting 17
01-C-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.917G	63.53	88.20	-24.67	51.76	3	Vertical	317	1.80	-	34.10	10.11	32.44			
RMS	5.919G	53.60	68.20	-14.60	41.83	3	Vertical	317	1.80	-	34.10	10.11	32.44			
PK	6.099G	108.85	Inf	-Inf	96.89	3	Vertical	317	1.80	-	34.10	10.29	32.43			
RMS	6.099G	100.23	Inf	-Inf	88.27	3	Vertical	317	1.80	-	34.10	10.29	32.43			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

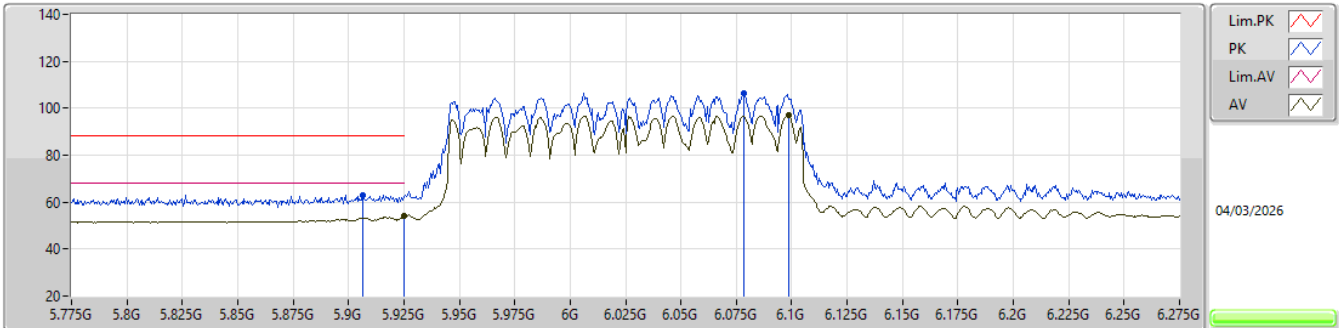


EUT_Y_4TX
Setting 17
01-C-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9065G	62.83	88.20	-25.37	51.07	3	Horizontal	68	1.80	-	34.10	10.10	32.44			
RMS	5.925G	53.90	68.20	-14.30	42.12	3	Horizontal	68	1.80	-	34.10	10.12	32.44			
PK	6.0785G	106.54	Inf	-Inf	94.60	3	Horizontal	68	1.80	-	34.10	10.27	32.43			
RMS	6.0985G	96.96	Inf	-Inf	85.00	3	Horizontal	68	1.80	-	34.10	10.29	32.43			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

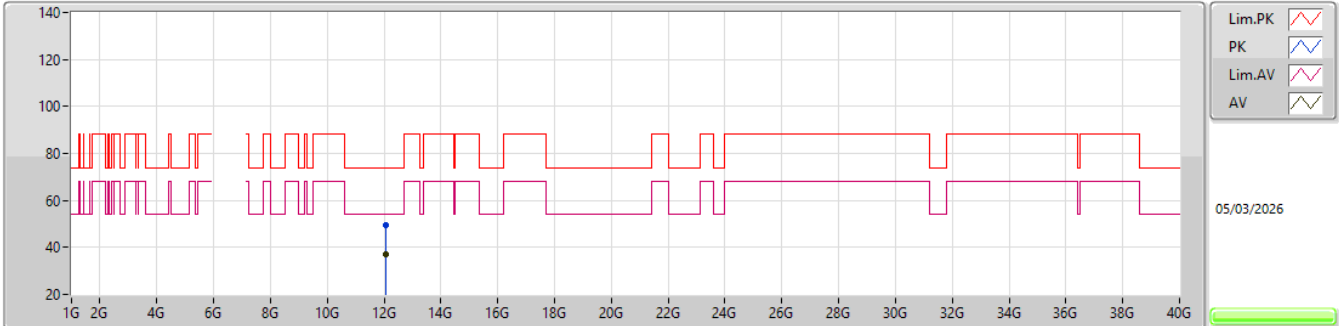


EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.05021G	49.43	74.00	-24.57	41.52	3	Vertical	8	1.80	-	38.80	15.03	45.92			
AV	12.04994G	36.97	54.00	-17.03	29.06	3	Vertical	8	1.80	-	38.80	15.03	45.92			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

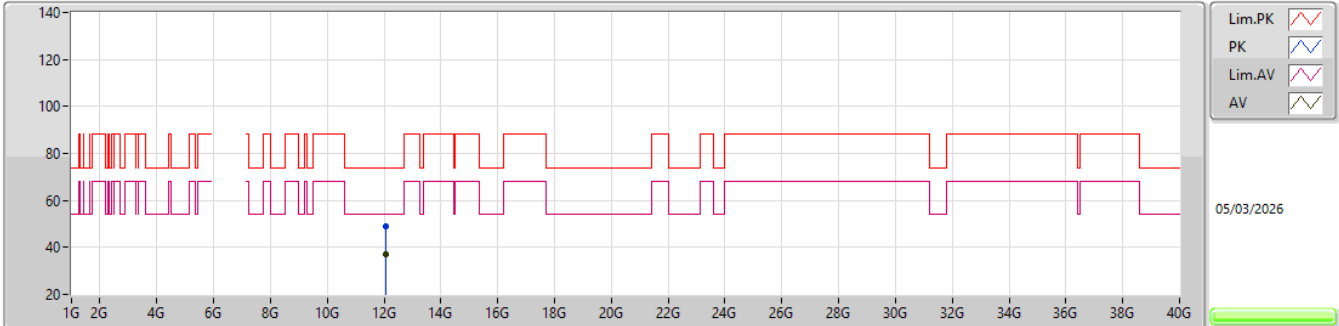


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.04547G	48.90	74.00	-25.10	41.00	3	Horizontal	230	1.86	-	38.79	15.03	45.92			
AV	12.04997G	36.97	54.00	-17.03	29.06	3	Horizontal	230	1.86	-	38.80	15.03	45.92			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

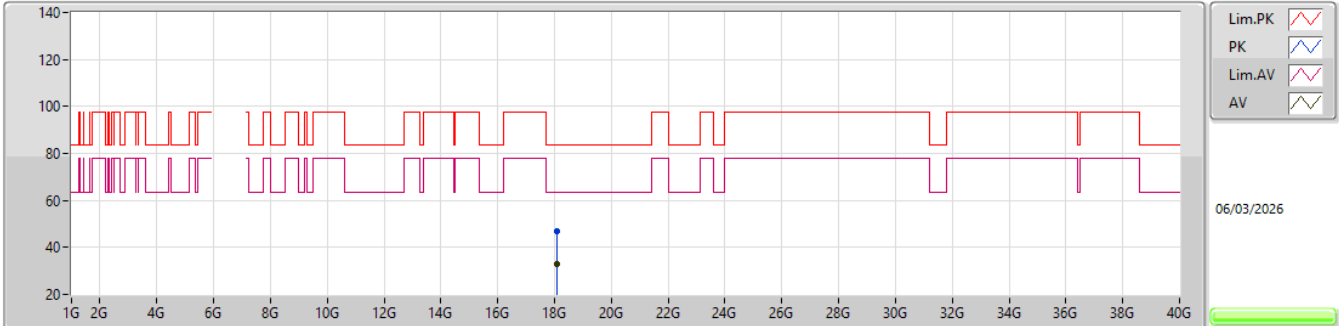


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07868G	46.69	83.54	-36.85	42.12	1	Vertical	28	1.15	-	37.26	15.74	48.43			
AV	18.07796G	32.85	63.54	-30.69	28.28	1	Vertical	28	1.15	-	37.26	15.74	48.43			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6025MHz_TX

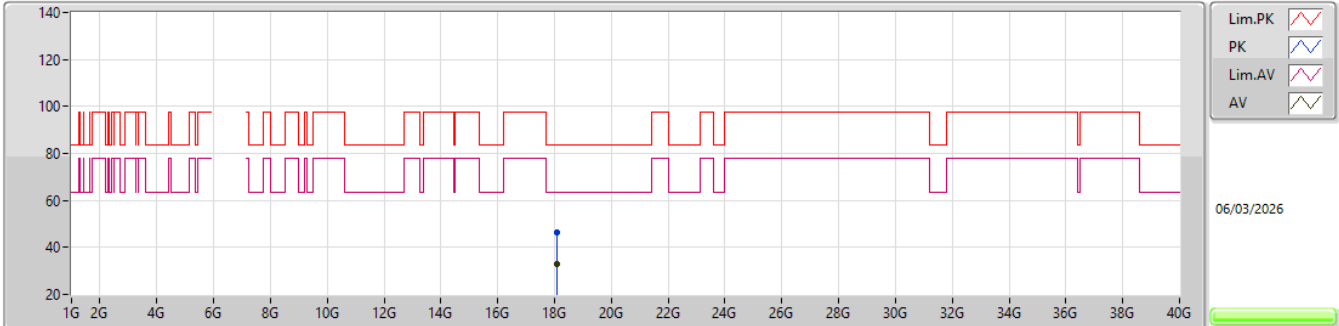


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07524G	46.24	83.54	-37.30	41.68	1	Horizontal	145	2.95	-	37.25	15.74	48.43			
AV	18.0783G	32.87	63.54	-30.67	28.30	1	Horizontal	145	2.95	-	37.26	15.74	48.43			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6185MHz_TX

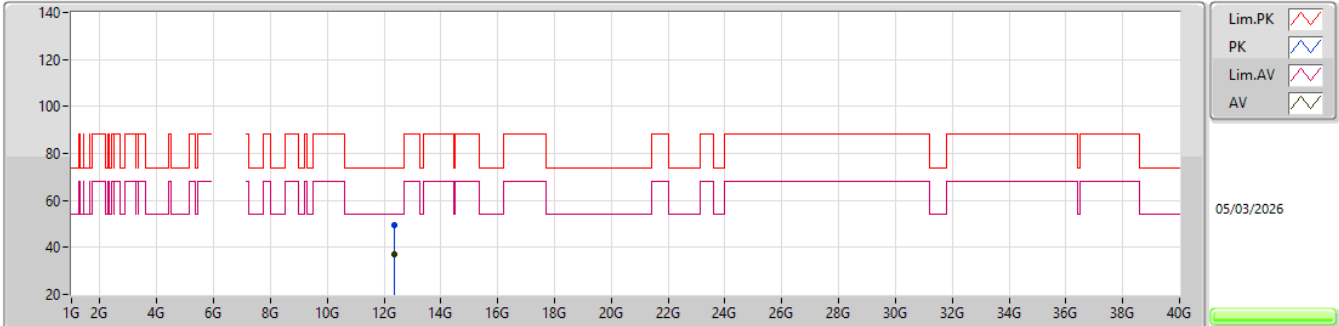


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.36895G	49.63	74.00	-24.37	41.49	3	Vertical	35	1.80	-	38.66	15.07	45.59			
AV	12.37003G	37.20	54.00	-16.80	29.06	3	Vertical	35	1.80	-	38.66	15.07	45.59			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6185MHz_TX

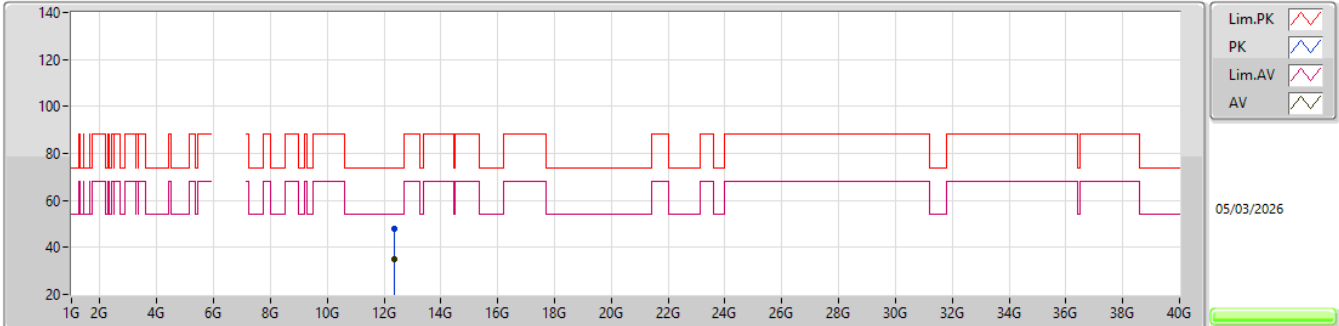


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38026G	48.11	74.00	-25.89	39.98	3	Horizontal	359	2.51	-	38.64	15.07	45.58			
AV	12.35884G	34.78	54.00	-19.22	26.63	3	Horizontal	359	2.51	-	38.68	15.07	45.60			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6185MHz_TX

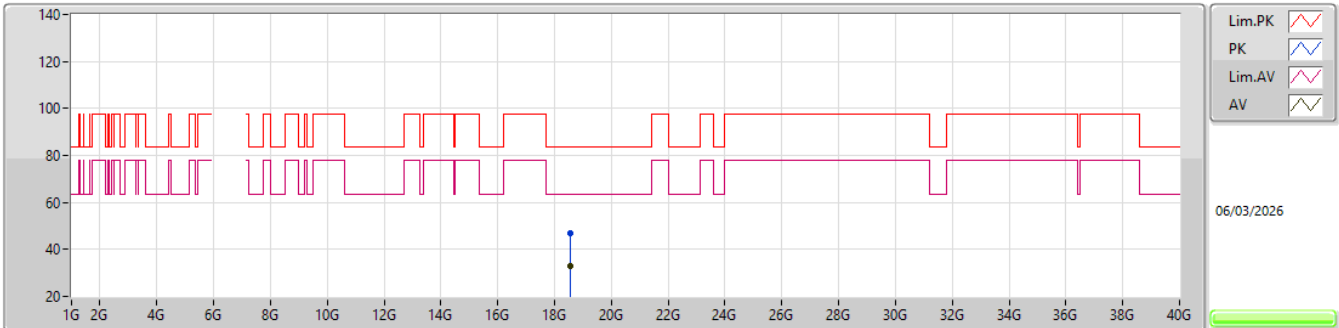EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.55722G	46.80	83.54	-36.74	41.78	1	Vertical	3	1.88	-	37.53	16.12	48.63			
AV	18.55816G	33.10	63.54	-30.44	28.08	1	Vertical	3	1.88	-	37.53	16.12	48.63			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6185MHz_TX

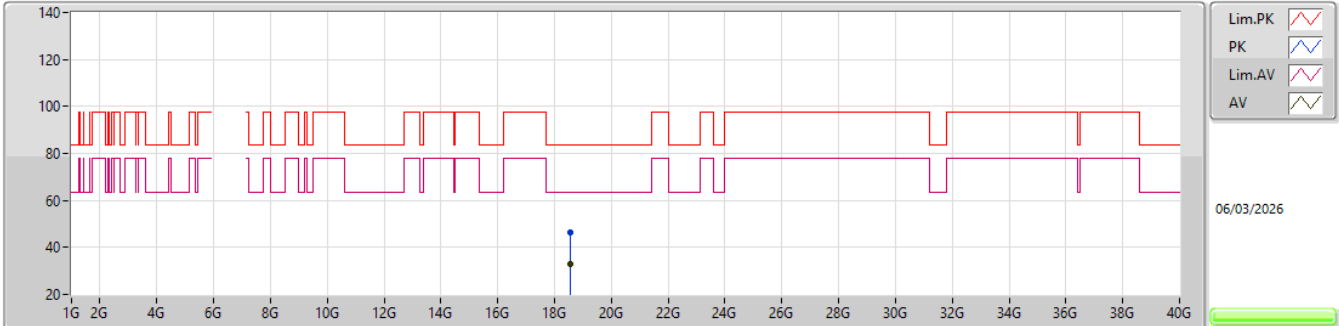


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5598G	46.27	83.54	-37.27	41.25	1	Horizontal	262	2.88	-	37.54	16.12	48.64			
AV	18.55558G	33.06	63.54	-30.48	28.05	1	Horizontal	262	2.88	-	37.52	16.12	48.63			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6345MHz_TX

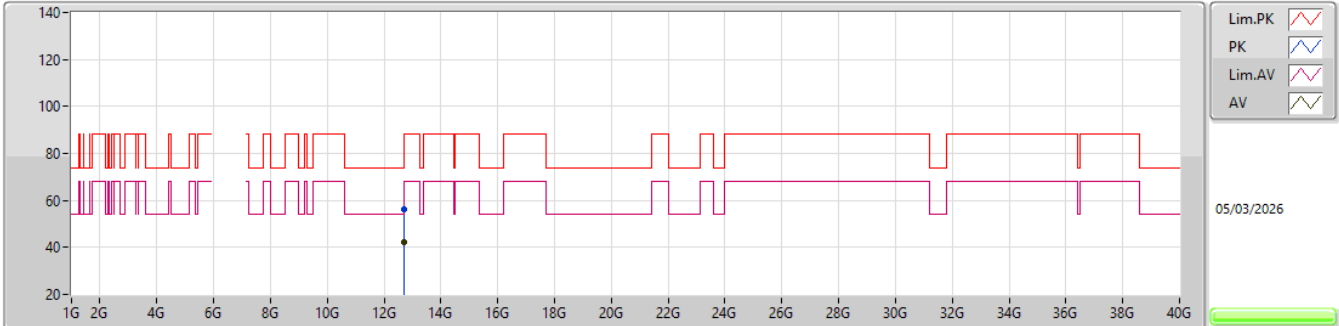


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.68316G	56.15	74.00	-17.85	47.24	3	Vertical	0	1.80	-	39.43	15.11	45.63			
AV	12.6934G	42.29	54.00	-11.71	33.35	3	Vertical	0	1.80	-	39.47	15.11	45.64			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6345MHz_TX

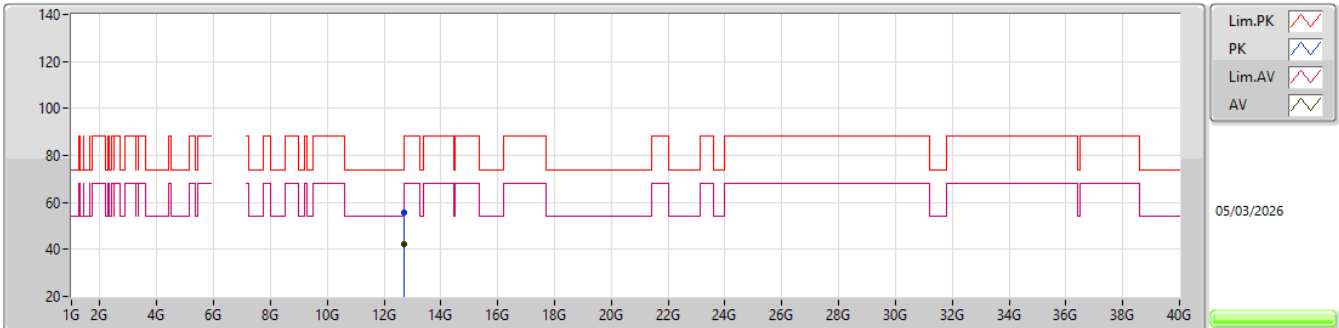


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.69304G	55.76	74.00	-18.24	46.82	3	Horizontal	244	2.26	-	39.47	15.11	45.64			
AV	12.69332G	42.35	54.00	-11.65	33.41	3	Horizontal	244	2.26	-	39.47	15.11	45.64			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6345MHz_TX

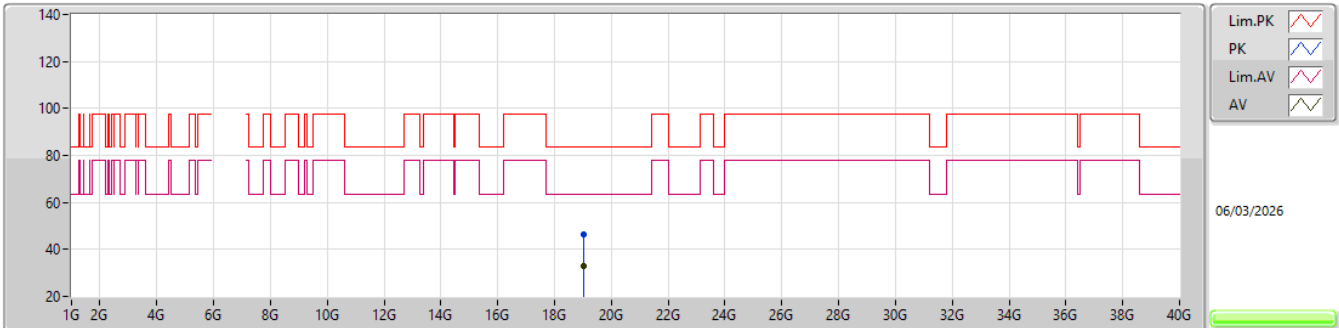EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03728G	46.58	83.54	-36.96	41.22	1	Vertical	48	1.00	-	37.77	16.48	48.89			
AV	19.03012G	32.81	63.54	-30.73	27.47	1	Vertical	48	1.00	-	37.76	16.47	48.89			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6345MHz_TX

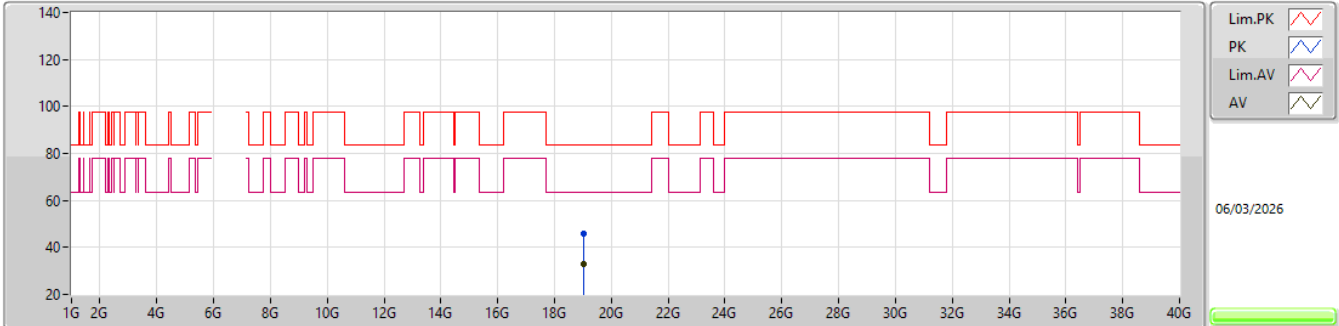


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03886G	46.00	83.54	-37.54	40.63	1	Horizontal	220	2.44	-	37.78	16.48	48.89			
AV	19.03G	32.75	63.54	-30.79	27.41	1	Horizontal	220	2.44	-	37.76	16.47	48.89			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6505MHz_TX

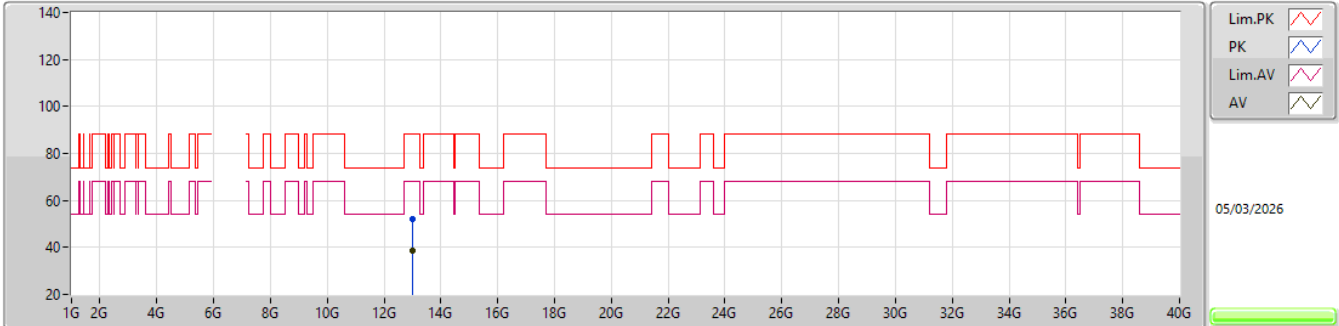


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.99788G	51.82	88.20	-36.38	42.49	3	Vertical	19	1.80	-	40.10	15.15	45.92			
RMS	12.99833G	38.87	68.20	-29.33	29.54	3	Vertical	19	1.80	-	40.10	15.15	45.92			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6505MHz_TX

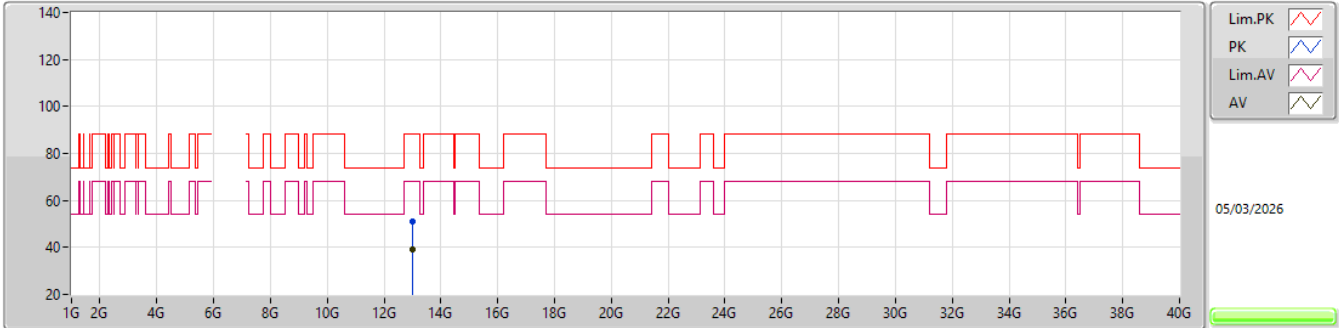


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9986G	51.09	88.20	-37.11	41.76	3	Horizontal	217	1.60	-	40.10	15.15	45.92			
AV	12.99764G	38.94	68.20	-29.26	29.61	3	Horizontal	217	1.60	-	40.10	15.15	45.92			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6505MHz_TX

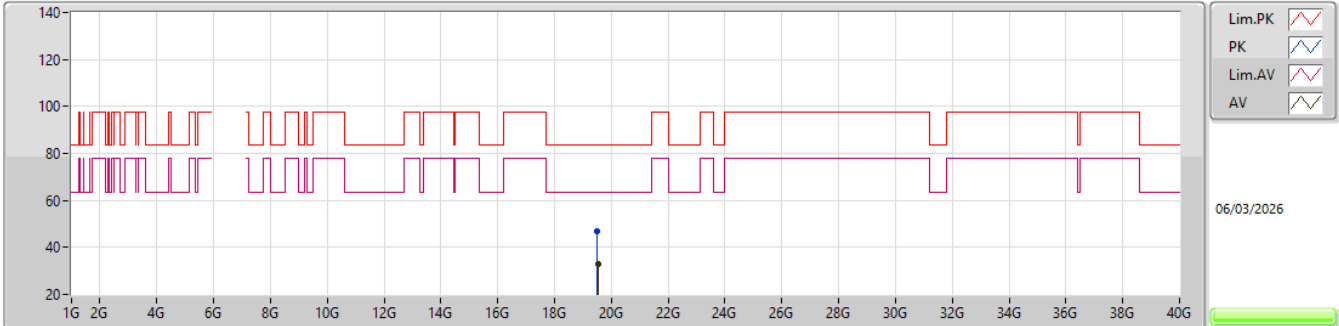


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.51576G	46.69	83.54	-36.85	41.42	1	Vertical	28	1.12	-	37.53	16.55	48.81			
AV	19.51754G	32.72	63.54	-30.82	27.44	1	Vertical	28	1.12	-	37.54	16.55	48.81			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6505MHz_TX

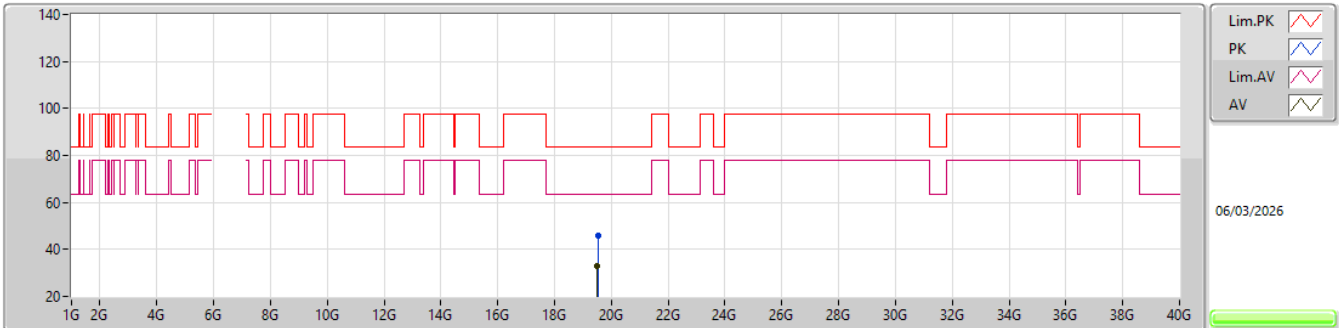


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.51996G	45.98	83.54	-37.56	40.70	1	Horizontal	73	2.60	-	37.54	16.55	48.81			
AV	19.51194G	32.77	63.54	-30.77	27.50	1	Horizontal	73	2.60	-	37.52	16.55	48.80			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6665MHz_TX

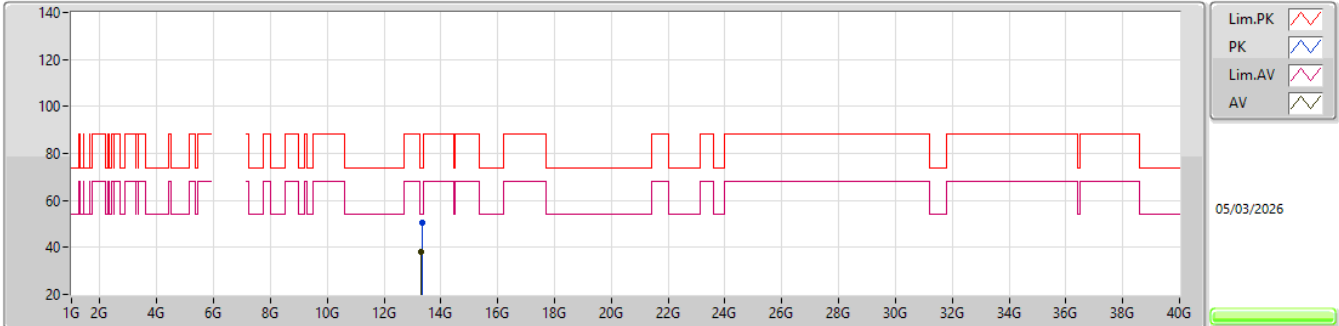


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.33069G	50.49	74.00	-23.51	40.30	3	Vertical	71	1.80	-	40.32	15.19	45.32			
AV	13.31521G	38.24	54.00	-15.76	28.14	3	Vertical	71	1.80	-	40.26	15.19	45.35			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6665MHz_TX

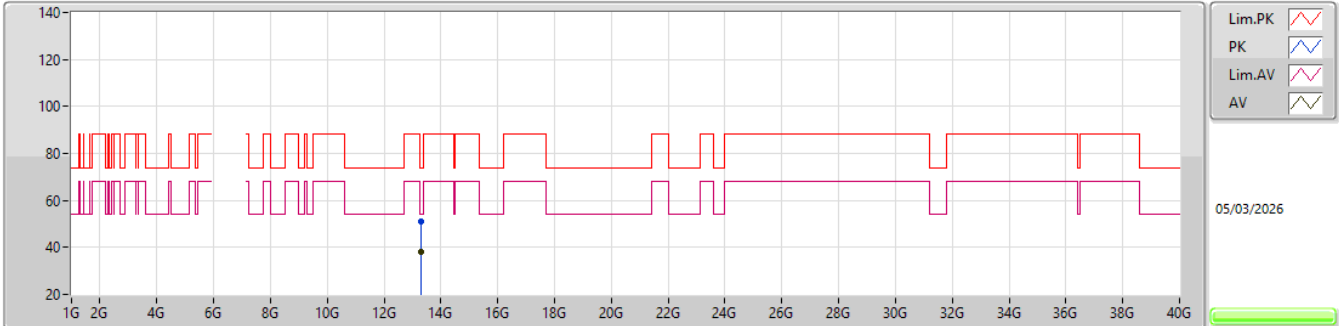


EUT Y_4TX
Setting 27
01-C-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.31743G	51.12	74.00	-22.88	41.00	3	Horizontal	353	2.20	-	40.27	15.19	45.34			
AV	13.315G	38.28	54.00	-15.72	28.18	3	Horizontal	353	2.20	-	40.26	15.19	45.35			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6665MHz_TX

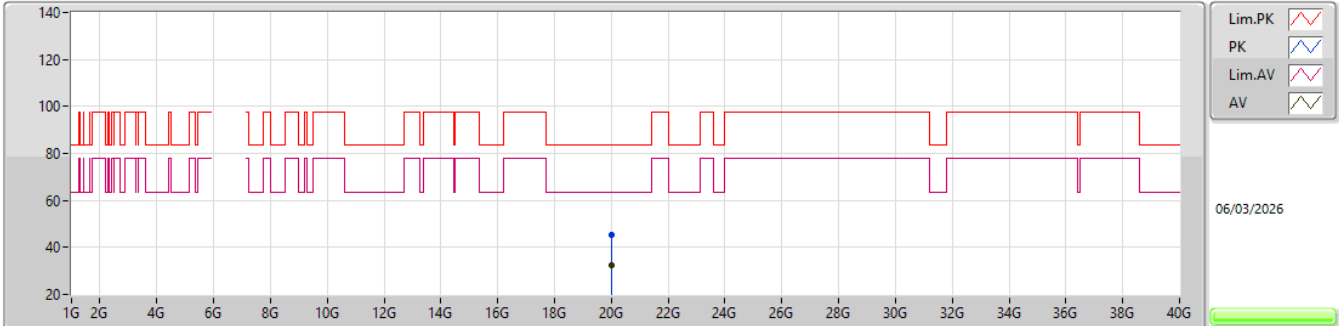


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.9961G	45.57	83.54	-37.97	40.53	1	Vertical	158	1.70	-	37.42	16.62	49.00			
AV	19.99406G	32.16	63.54	-31.38	27.12	1	Vertical	158	1.70	-	37.42	16.62	49.00			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6665MHz_TX

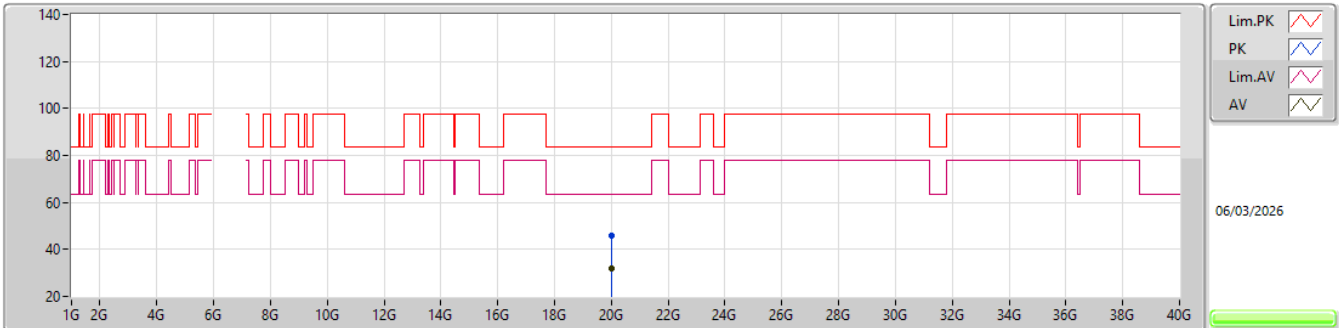


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.99758G	45.90	83.54	-37.64	40.87	1	Horizontal	304	2.27	-	37.41	16.62	49.00			
AV	19.99394G	32.15	63.54	-31.39	27.11	1	Horizontal	304	2.27	-	37.42	16.62	49.00			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6825MHz_TX

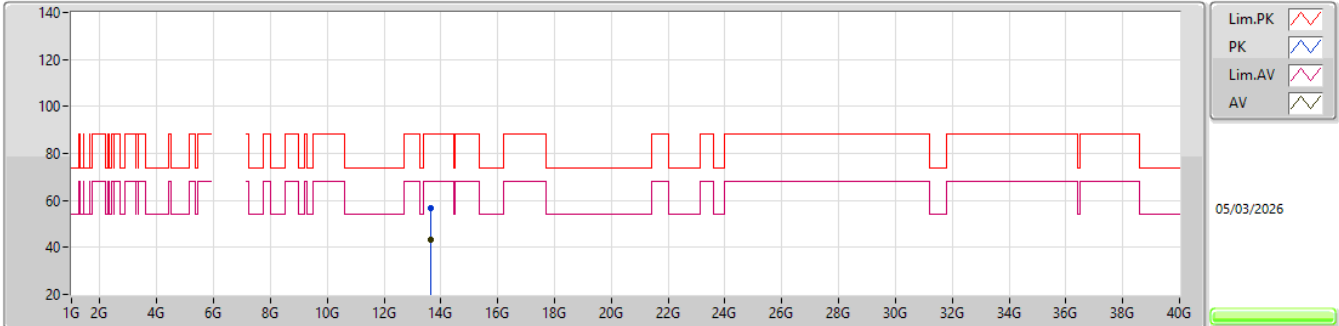


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.65297G	56.72	88.20	-31.48	45.92	3	Vertical	12	1.80	-	40.61	15.23	45.04			
RMS	13.65474G	43.34	68.20	-24.86	32.53	3	Vertical	12	1.80	-	40.61	15.24	45.04			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6825MHz_TX

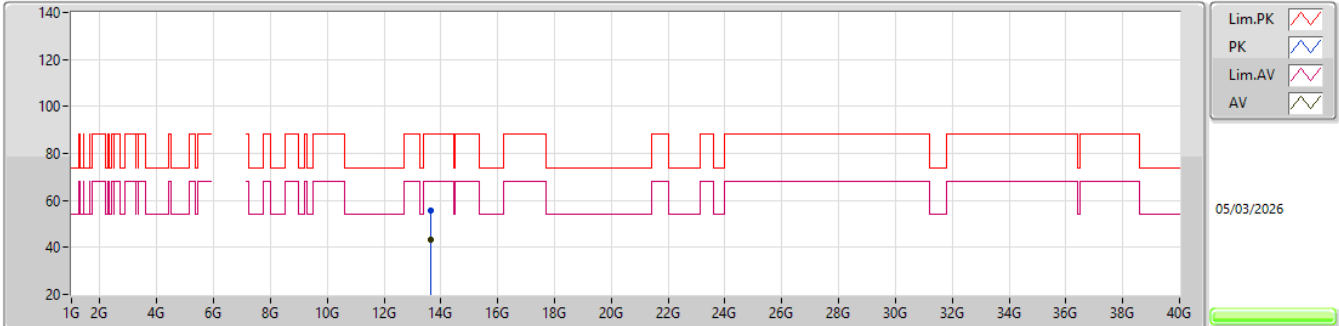


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.65342G	55.73	88.20	-32.47	44.93	3	Horizontal	187	1.55	-	40.61	15.23	45.04			
RMS	13.65468G	43.39	68.20	-24.81	32.58	3	Horizontal	187	1.55	-	40.61	15.24	45.04			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6825MHz_TX

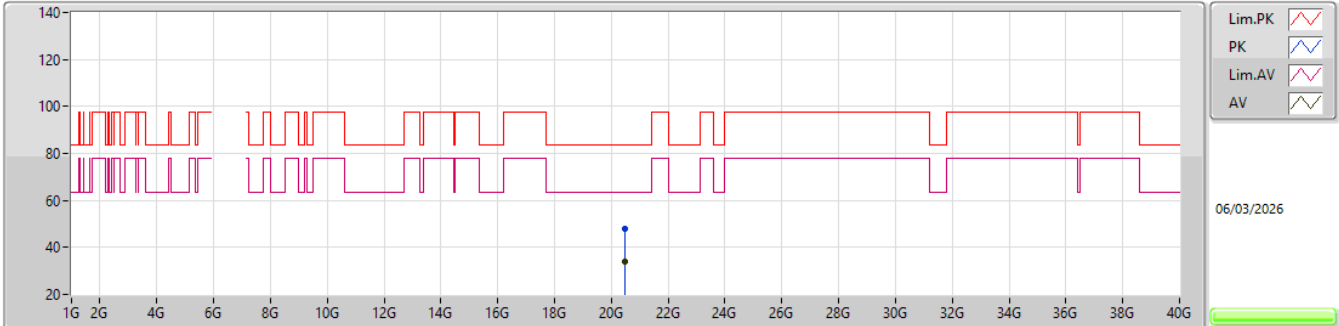


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.47184G	47.93	83.54	-35.61	42.30	1	Vertical	293	2.18	-	37.49	17.05	48.91			
AV	20.47888G	34.04	63.54	-29.50	28.36	1	Vertical	293	2.18	-	37.52	17.06	48.90			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6825MHz_TX

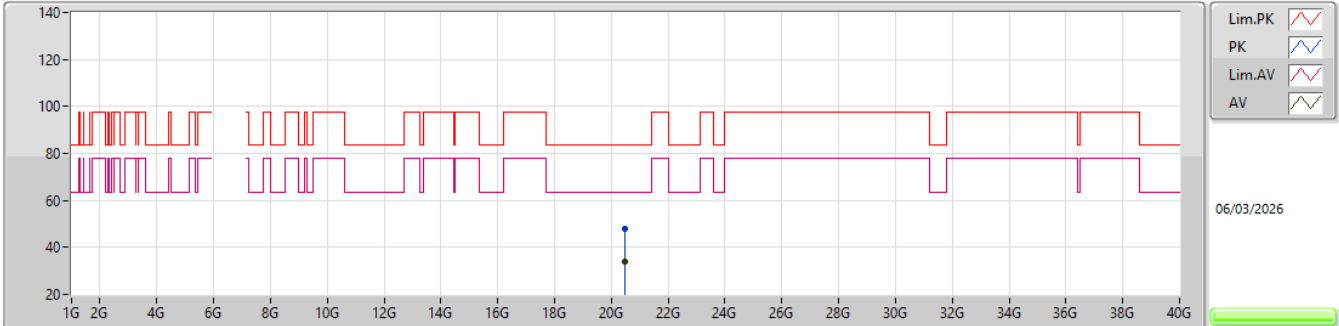


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.47714G	47.96	83.54	-35.58	42.30	1	Horizontal	258	1.10	-	37.51	17.05	48.90			
AV	20.47924G	34.01	63.54	-29.53	28.33	1	Horizontal	258	1.10	-	37.52	17.06	48.90			

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6985MHz_TX

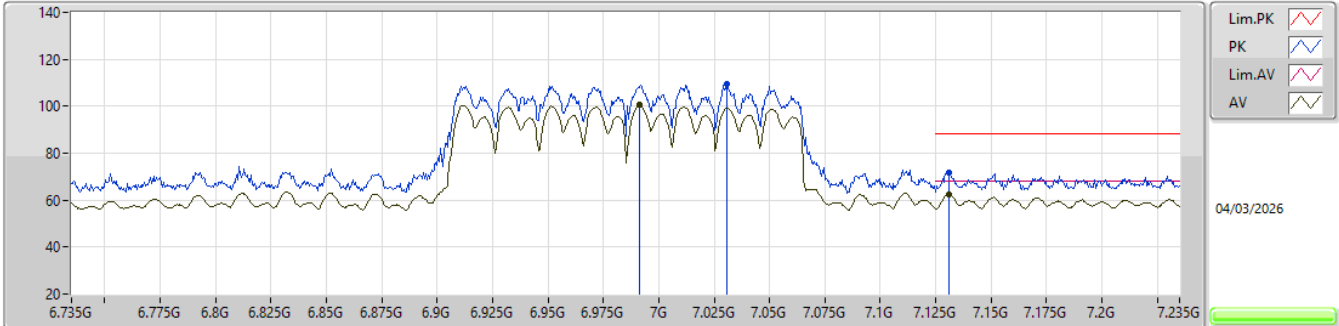


EUT_Y_4TX
Setting 20.5
01-C-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.031G	109.71	Inf	-Inf	95.28	3	Vertical	300	1.80	-	36.12	11.05	32.74			
RMS	6.9915G	100.48	Inf	-Inf	86.28	3	Vertical	300	1.80	-	35.98	10.96	32.74			
PK	7.131G	71.52	88.20	-16.68	56.21	3	Vertical	300	1.80	-	36.69	11.32	32.70			
RMS	7.131G	62.48	68.20	-5.72	47.17	3	Vertical	300	1.80	-	36.69	11.32	32.70			

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6985MHz_TX

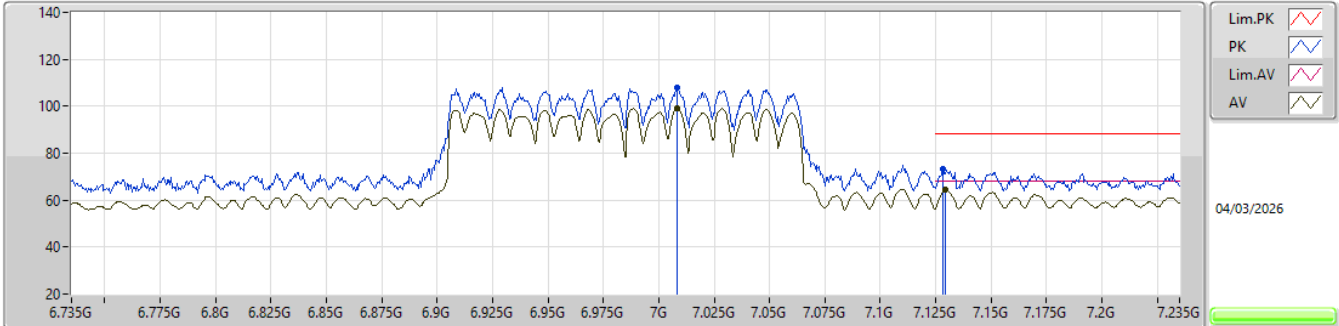


EUT_Y_4TX
Setting 20.5
01-C-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0085G	108.09	Inf	-Inf	93.83	3	Horizontal	69	1.80	-	36.03	10.98	32.75			
RMS	7.0085G	99.16	Inf	-Inf	84.90	3	Horizontal	69	1.80	-	36.03	10.98	32.75			
PK	7.128G	73.04	88.20	-15.16	57.76	3	Horizontal	69	1.80	-	36.67	11.31	32.70			
RMS	7.1295G	64.30	68.20	-3.90	49.00	3	Horizontal	69	1.80	-	36.68	11.32	32.70			

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6985MHz_TX

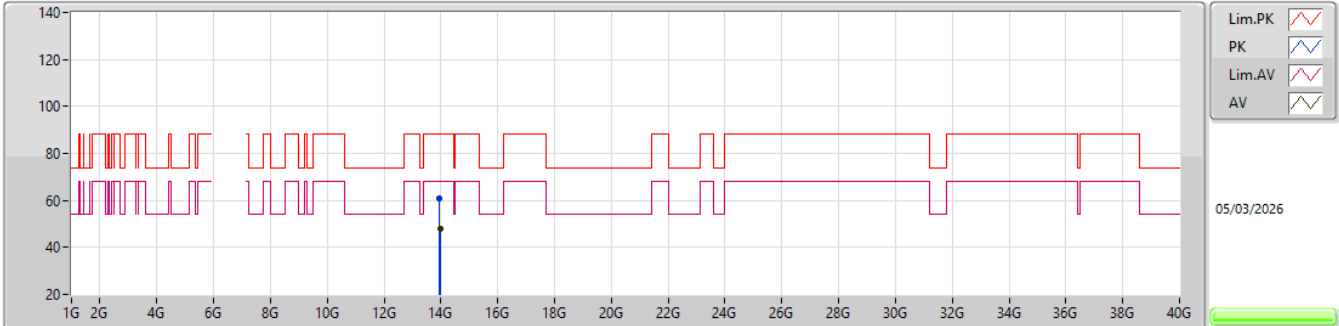


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.95602G	60.99	88.20	-27.21	50.03	3	Vertical	8	1.80	-	40.80	15.27	45.11			
RMS	13.9745G	47.81	68.20	-20.39	36.84	3	Vertical	8	1.80	-	40.80	15.28	45.11			

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6985MHz_TX

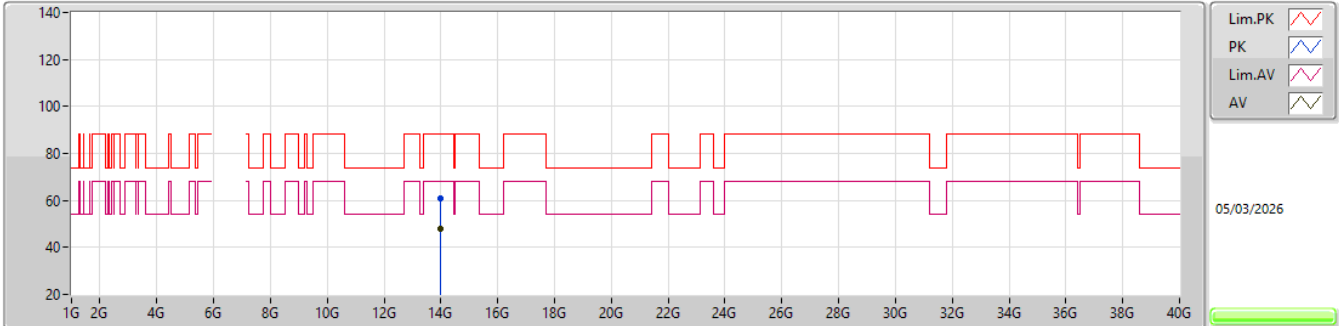


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.97399G	60.93	88.20	-27.27	49.96	3	Horizontal	51	2.08	-	40.80	15.28	45.11			
RMS	13.9745G	47.90	68.20	-20.30	36.93	3	Horizontal	51	2.08	-	40.80	15.28	45.11			

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6985MHz_TX

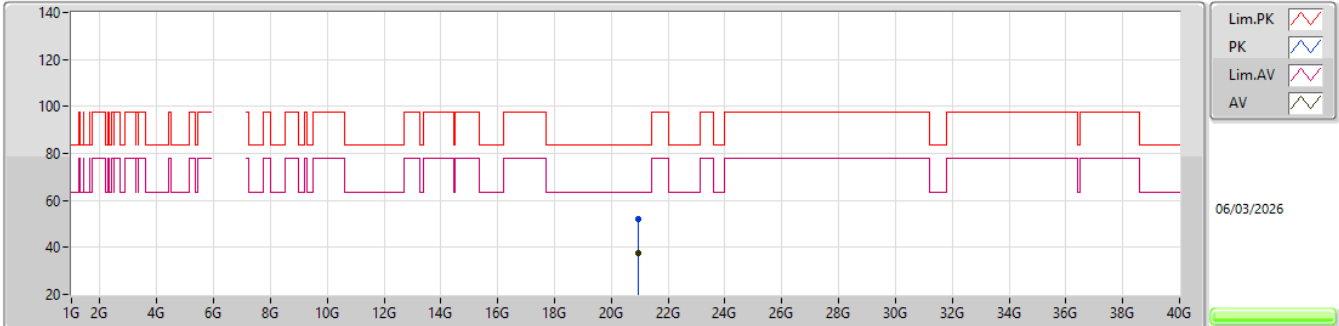


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.95997G	51.90	83.54	-31.64	45.53	1	Vertical	348	2.05	-	37.78	17.49	48.90			
AV	20.95996G	37.84	63.54	-25.70	31.47	1	Vertical	348	2.05	-	37.78	17.49	48.90			

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

6985MHz_TX

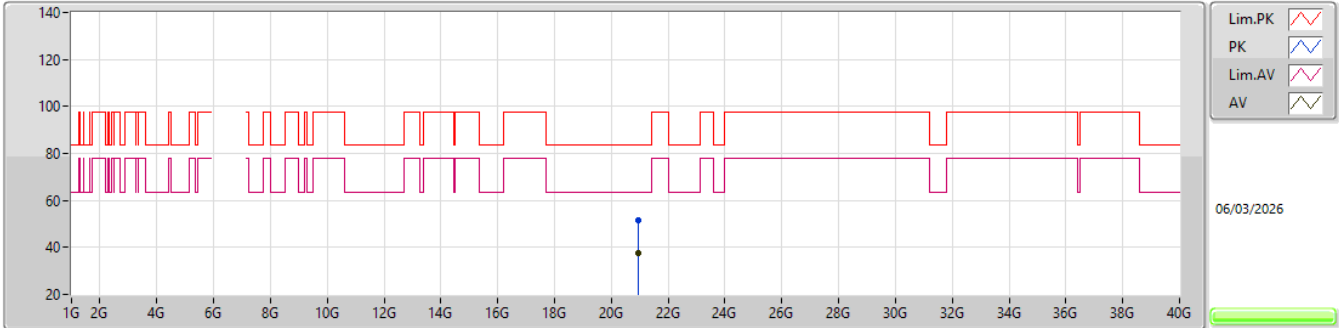


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.95402G	51.67	83.54	-31.87	45.29	1	Horizontal	95	1.47	-	37.79	17.49	48.90			
AV	20.95726G	37.75	63.54	-25.79	31.37	1	Horizontal	95	1.47	-	37.79	17.49	48.90			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6105MHz_TX

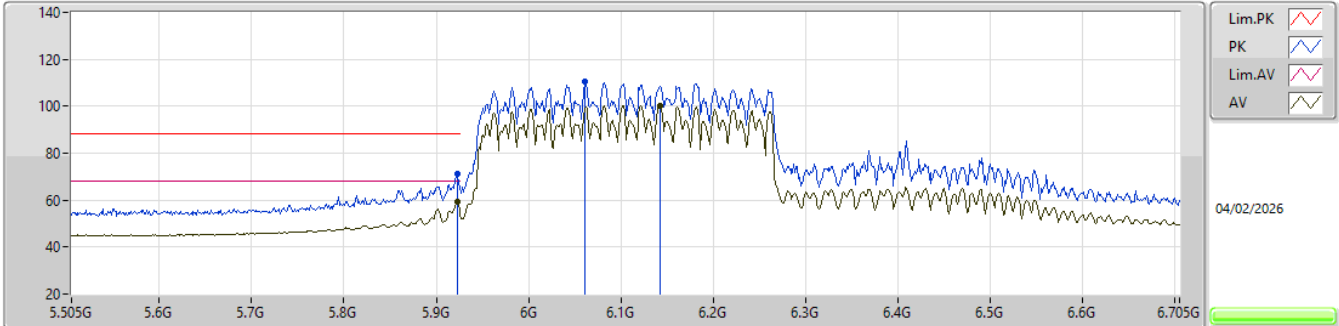


EUT_Y_4TX
Setting 22.5
04-W-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9226G	71.15	88.20	-17.05	73.10	3	Vertical	353.1	1.72	-	32.40	9.05	43.40				
RMS	5.9226G	59.08	68.20	-9.12	61.03	3	Vertical	353.1	1.72	-	32.40	9.05	43.40				
PK	6.0606G	110.67	Inf	-Inf	112.30	3	Vertical	353.1	1.72	-	32.50	9.18	43.31				
RMS	6.1422G	100.23	Inf	-Inf	101.68	3	Vertical	353.1	1.72	-	32.58	9.23	43.26				

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6105MHz_TX

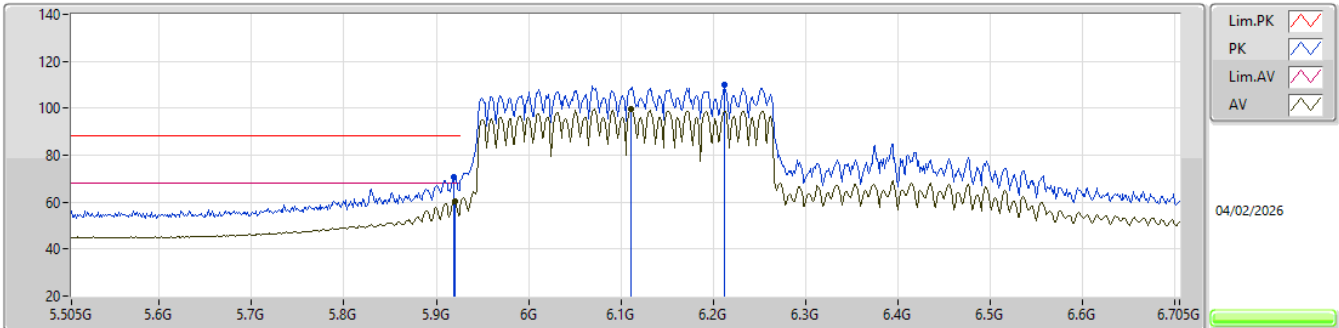


EUT_Y_4TX
Setting 22.5
04-W-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.919G	70.87	88.20	-17.33	72.82	3	Horizontal	290.4	1.69	-	32.40	9.05	43.40			
RMS	5.9202G	60.29	68.20	-7.91	62.24	3	Horizontal	290.4	1.69	-	32.40	9.05	43.40			
PK	6.2118G	110.22	Inf	-Inf	111.40	3	Horizontal	290.4	1.69	-	32.77	9.28	43.23			
RMS	6.111G	99.54	Inf	-Inf	101.09	3	Horizontal	290.4	1.69	-	32.52	9.21	43.28			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6105MHz_TX

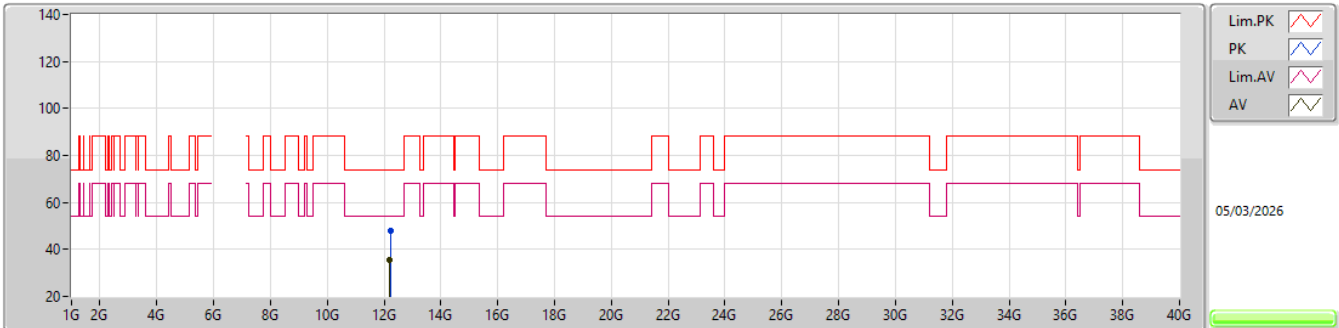


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.21501G	47.96	74.00	-26.04	39.76	3	Vertical	6	1.80	-	38.90	15.05	45.75			
AV	12.20994G	35.59	54.00	-18.41	27.40	3	Vertical	6	1.80	-	38.90	15.05	45.76			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX


6105MHz_TX

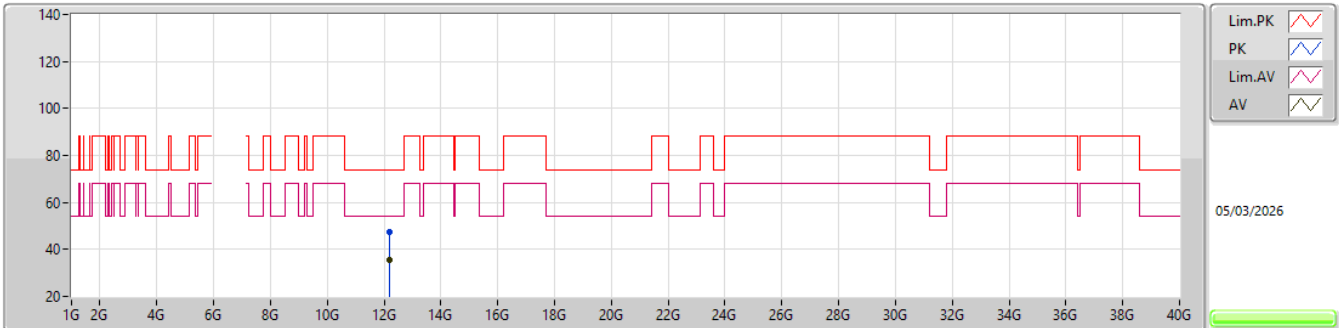EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.20526G	47.33	74.00	-26.67	39.14	3	Horizontal	154	1.36	-	38.90	15.05	45.76			
AV	12.20997G	35.51	54.00	-18.49	27.32	3	Horizontal	154	1.36	-	38.90	15.05	45.76			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6105MHz_TX

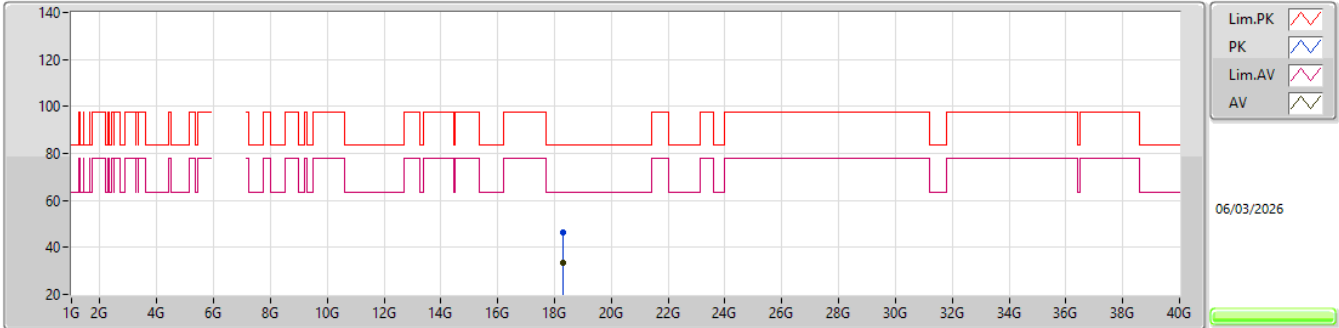


EUT Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31474G	46.24	83.54	-37.30	41.48	1	Vertical	237	2.17	-	37.36	15.93	48.53			
AV	18.31135G	33.22	63.54	-30.32	28.46	1	Vertical	237	2.17	-	37.35	15.93	48.52			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6105MHz_TX

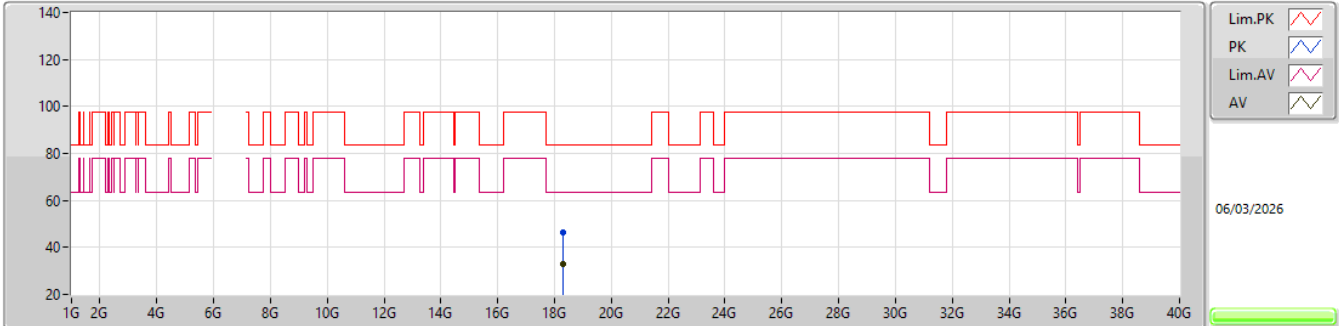


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31813G	46.30	83.54	-37.24	41.53	1	Horizontal	295	2.31	-	37.37	15.93	48.53			
AV	18.31421G	33.07	63.54	-30.47	28.31	1	Horizontal	295	2.31	-	37.36	15.93	48.53			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6265MHz_TX

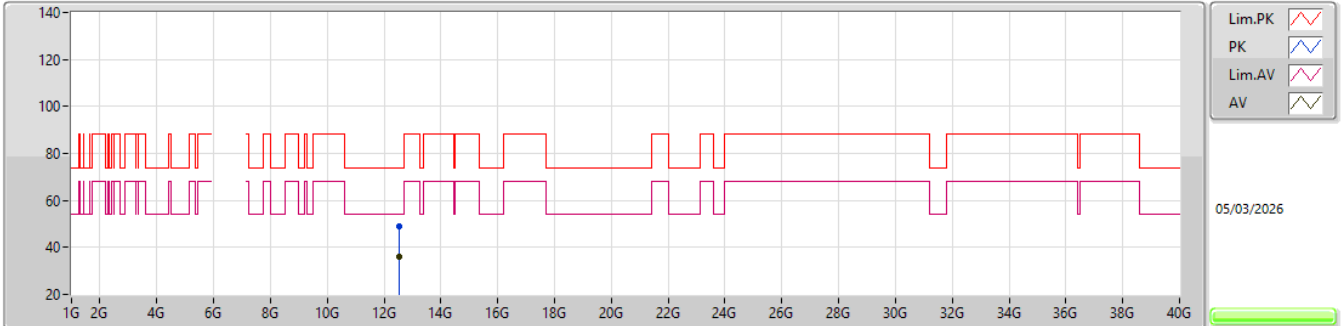


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.51677G	49.18	74.00	-24.82	40.64	3	Vertical	6	1.80	-	38.93	15.09	45.48			
AV	12.53624G	36.26	54.00	-17.74	27.69	3	Vertical	6	1.80	-	38.97	15.09	45.49			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6265MHz_TX

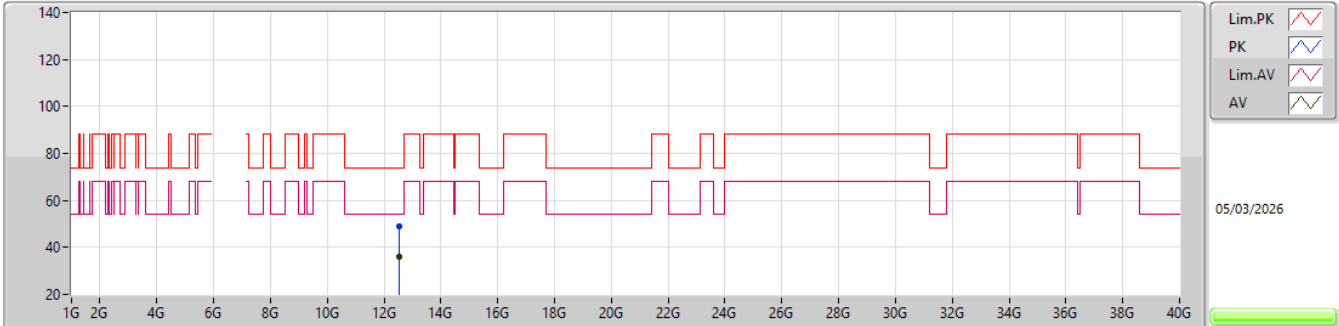


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.53824G	48.82	74.00	-25.18	40.25	3	Horizontal	129	2.85	-	38.98	15.09	45.50			
AV	12.536G	36.26	54.00	-17.74	27.69	3	Horizontal	129	2.85	-	38.97	15.09	45.49			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6265MHz_TX

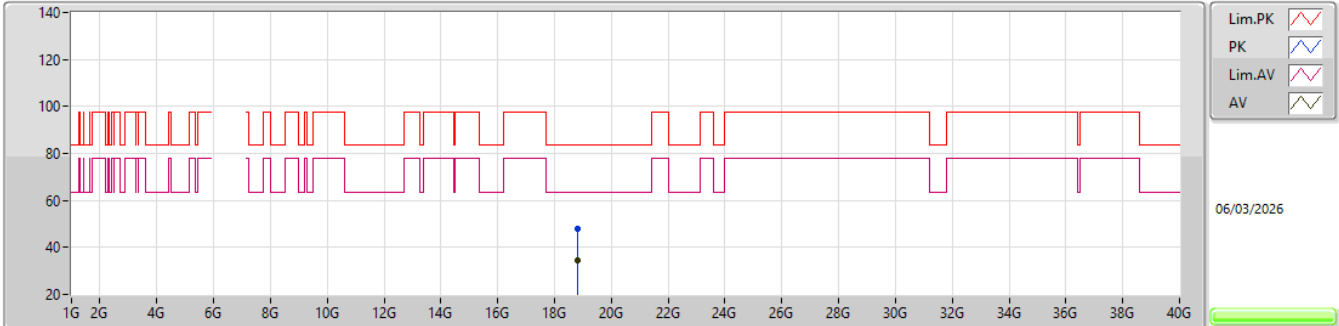


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.79916G	48.14	83.54	-35.40	43.01	1	Vertical	302	2.90	-	37.60	16.31	48.78			
AV	18.79356G	34.33	63.54	-29.21	29.17	1	Vertical	302	2.90	-	37.63	16.31	48.78			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX


6265MHz_TX

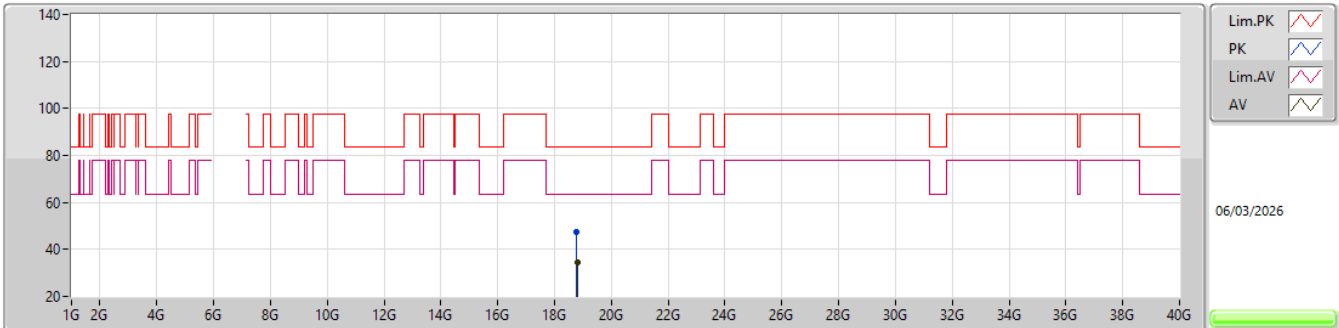EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.79046G	47.32	83.54	-36.22	42.15	1	Horizontal	97	2.71	-	37.64	16.30	48.77			
AV	18.79346G	34.38	63.54	-29.16	29.22	1	Horizontal	97	2.71	-	37.63	16.31	48.78			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6425MHz_TX

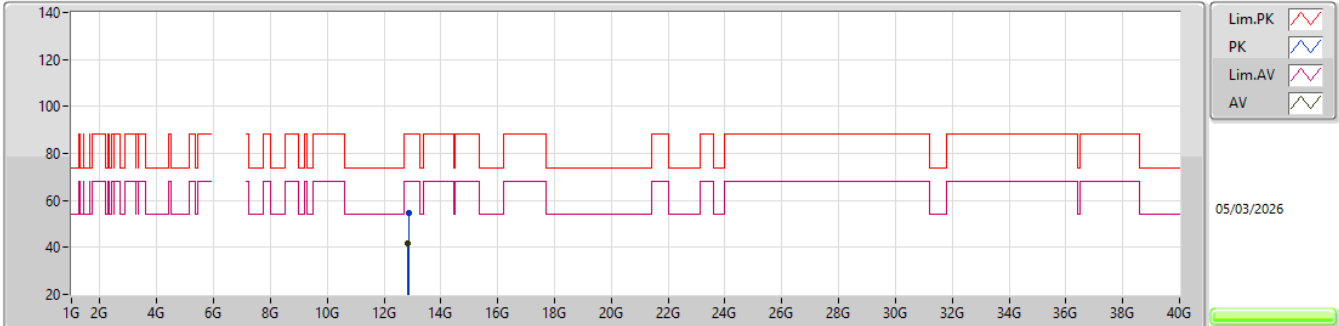


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8569G	54.62	88.20	-33.58	45.28	3	Vertical	231	1.98	-	40.00	15.13	45.79			
RMS	12.84026G	41.50	68.20	-26.70	32.16	3	Vertical	231	1.98	-	39.98	15.13	45.77			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX


6425MHz_TX

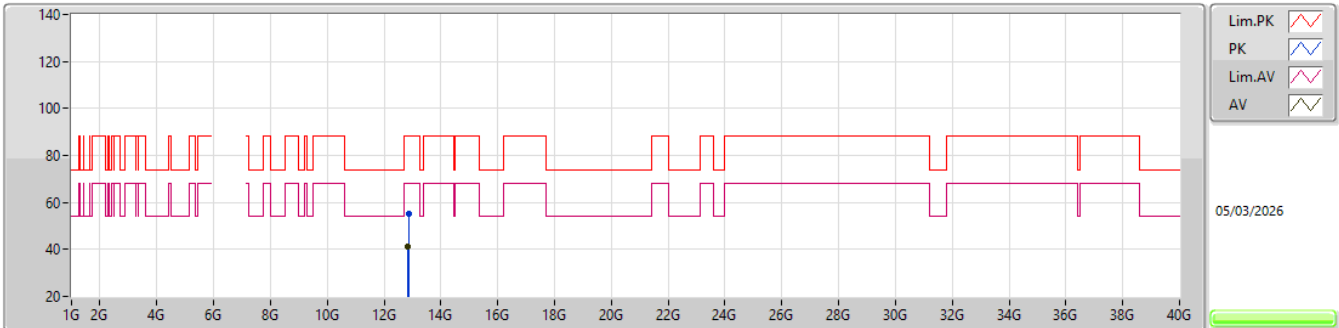EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.85874G	55.31	88.20	-32.89	45.97	3	Horizontal	58	2.77	-	40.00	15.13	45.79			
RMS	12.84006G	41.46	68.20	-26.74	32.12	3	Horizontal	58	2.77	-	39.98	15.13	45.77			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6425MHz_TX

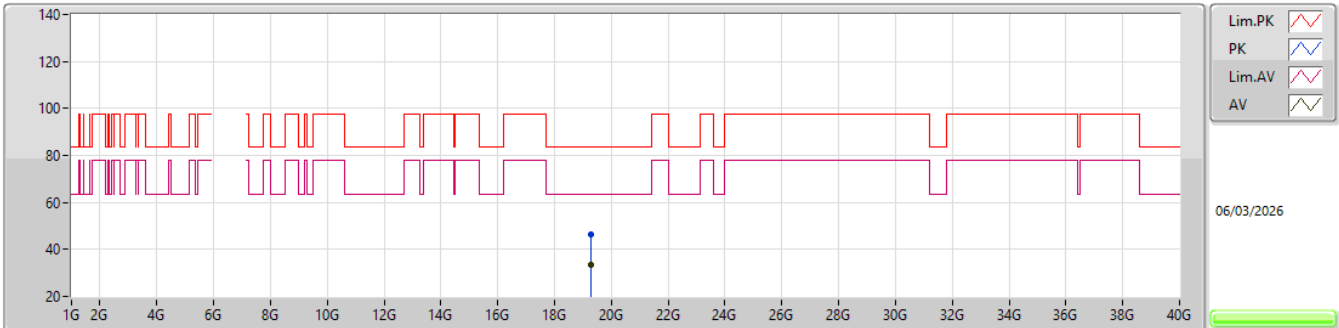


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.27548G	46.44	83.54	-37.10	41.02	1	Vertical	286	1.85	-	37.75	16.51	48.84			
AV	19.2707G	33.28	63.54	-30.26	27.84	1	Vertical	286	1.85	-	37.78	16.51	48.85			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6425MHz_TX

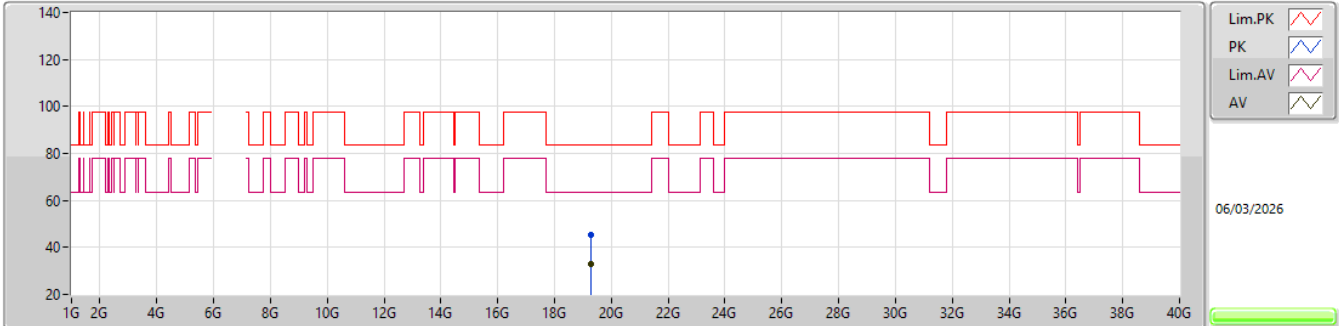


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2798G	45.60	83.54	-37.94	40.21	1	Horizontal	228	1.19	-	37.72	16.51	48.84			
AV	19.27076G	33.11	63.54	-30.43	27.67	1	Horizontal	228	1.19	-	37.78	16.51	48.85			

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6585MHz_TX

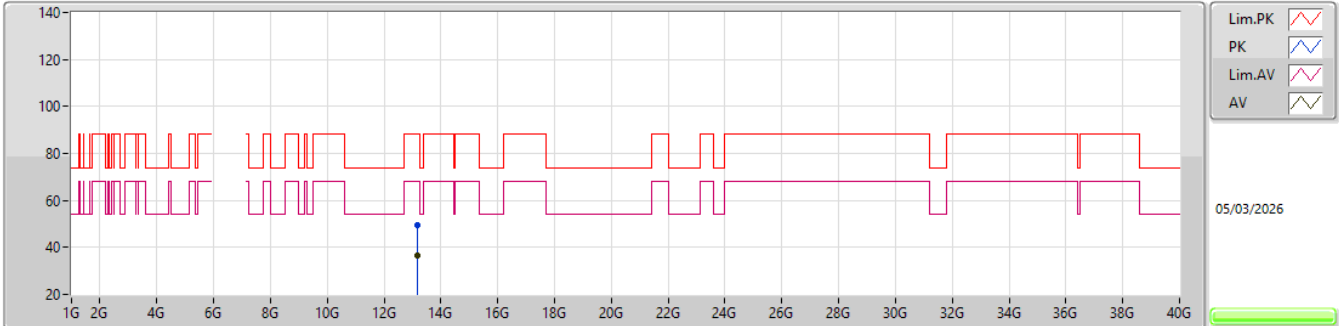


EUT_V_4TX
Setting 27
01-C-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.17608G	49.37	88.20	-38.83	39.80	3	Vertical	145	2.14	-	40.00	15.17	45.60			
RMS	13.16986G	36.79	68.20	-31.41	27.23	3	Vertical	145	2.14	-	40.00	15.17	45.61			

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6585MHz_TX

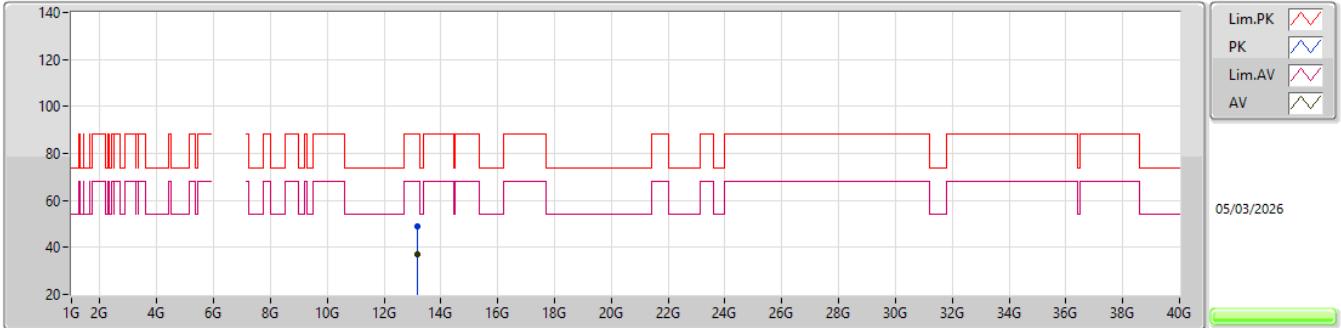


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.17346G	48.83	88.20	-39.37	39.26	3	Horizontal	50	1.65	-	40.00	15.17	45.60			
RMS	13.17008G	36.91	68.20	-31.29	27.35	3	Horizontal	50	1.65	-	40.00	15.17	45.61			

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6585MHz_TX

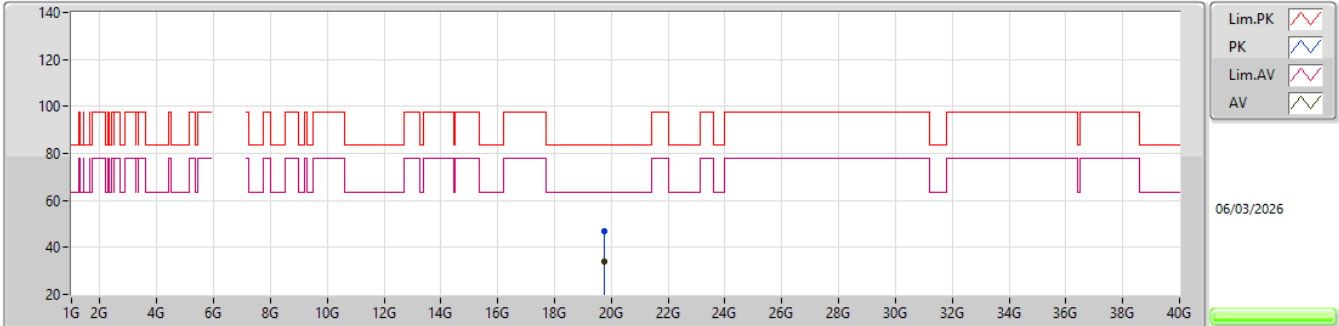


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.75628G	47.09	83.54	-36.45	41.91	1	Vertical	297	1.51	-	37.50	16.58	48.90			
AV	19.75412G	33.79	63.54	-29.75	28.61	1	Vertical	297	1.51	-	37.50	16.58	48.90			

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6585MHz_TX

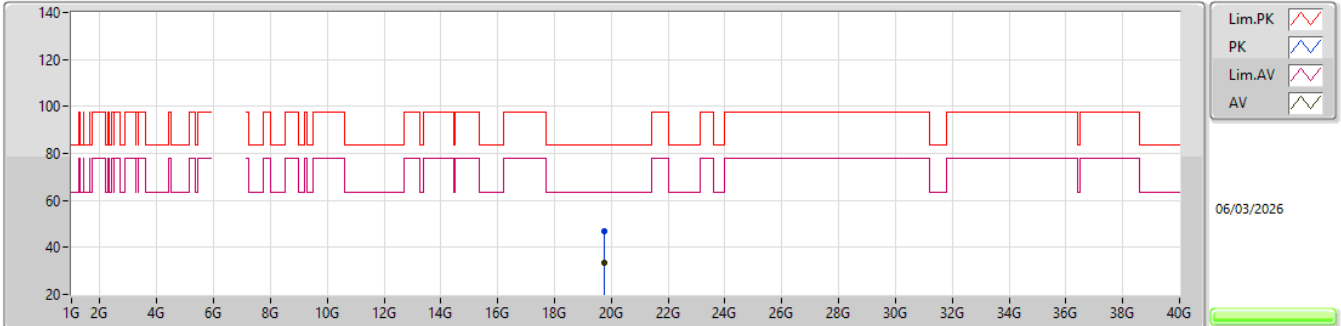


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.75518G	46.82	83.54	-36.72	41.64	1	Horizontal	173	1.21	-	37.50	16.58	48.90			
AV	19.75912G	33.65	63.54	-29.89	28.47	1	Horizontal	173	1.21	-	37.50	16.58	48.90			

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6745MHz_TX

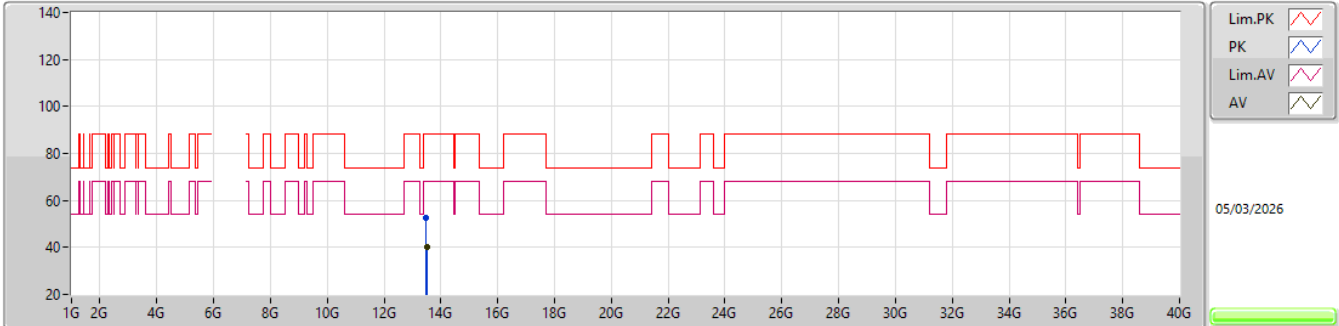


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.49452G	52.33	88.20	-35.87	41.36	3	Vertical	14	1.86	-	40.78	15.21	45.02			
RMS	13.49532G	39.96	68.20	-28.24	28.99	3	Vertical	14	1.86	-	40.78	15.21	45.02			

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6745MHz_TX

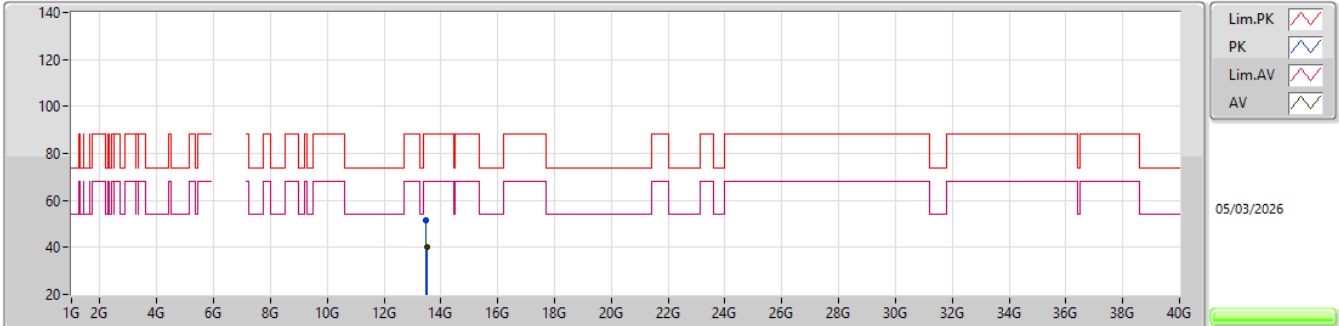


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.49382G	51.62	88.20	-36.58	40.65	3	Horizontal	5	2.42	-	40.78	15.21	45.02			
RMS	13.49526G	39.96	68.20	-28.24	28.99	3	Horizontal	5	2.42	-	40.78	15.21	45.02			

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6745MHz_TX

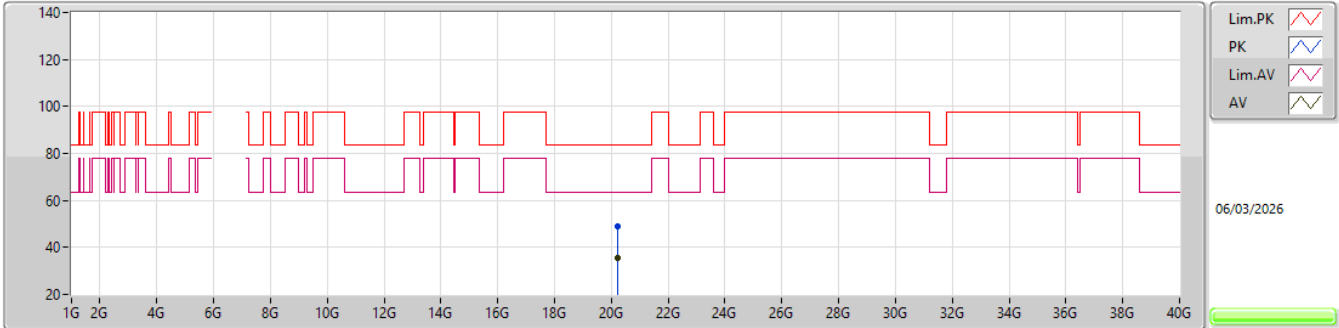


EUT_V_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.2359G	49.00	83.54	-34.54	43.68	1	Vertical	10	2.76	-	37.44	16.83	48.95			
AV	20.23782G	35.28	63.54	-28.26	29.94	1	Vertical	10	2.76	-	37.45	16.84	48.95			

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6745MHz_TX

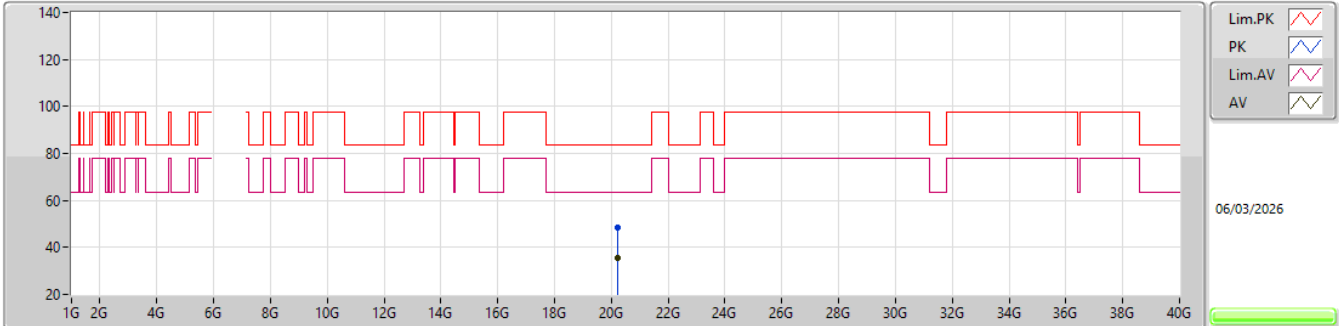


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.23522G	48.60	83.54	-34.94	43.28	1	Horizontal	138	2.97	-	37.44	16.83	48.95			
AV	20.23548G	35.31	63.54	-28.23	29.99	1	Horizontal	138	2.97	-	37.44	16.83	48.95			

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6905MHz_TX

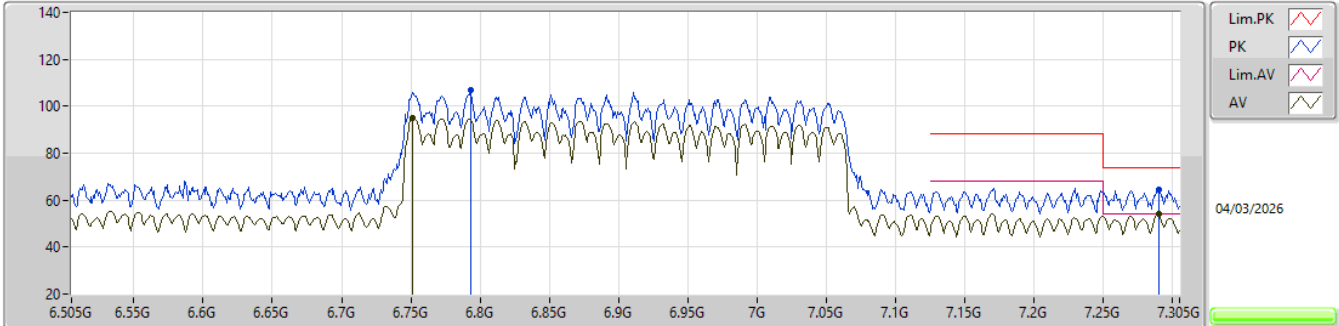


EUT_Y_4TX
Setting 20
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	6.793G	106.68	Inf	-Inf	92.24	3	Vertical	302	1.80	-	36.00	11.04	32.60				
AV	6.7514G	95.19	Inf	-Inf	80.80	3	Vertical	302	1.80	-	36.00	10.96	32.57				
PK	7.2898G	64.68	74.00	-9.32	48.61	3	Vertical	302	1.80	-	37.02	11.69	32.64				
AV	7.2898G	53.93	54.00	-0.07	37.86	3	Vertical	302	1.80	-	37.02	11.69	32.64				

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6905MHz_TX

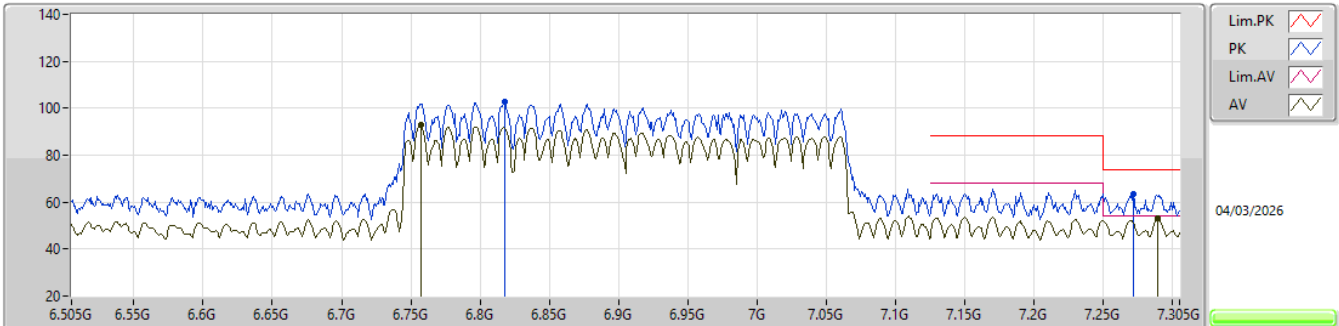


EUT_Y_4TX
Setting 20
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	6.8178G	102.82	Inf	-Inf	88.44	3	Horizontal	59	1.80	-	35.96	11.04	32.62			
AV	6.757G	92.71	Inf	-Inf	78.31	3	Horizontal	59	1.80	-	36.00	10.97	32.57			
PK	7.2714G	63.69	74.00	-10.31	47.63	3	Horizontal	59	1.80	-	37.06	11.65	32.65			
AV	7.289G	53.00	54.00	-1.00	36.94	3	Horizontal	59	1.80	-	37.02	11.68	32.64			

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6905MHz_TX

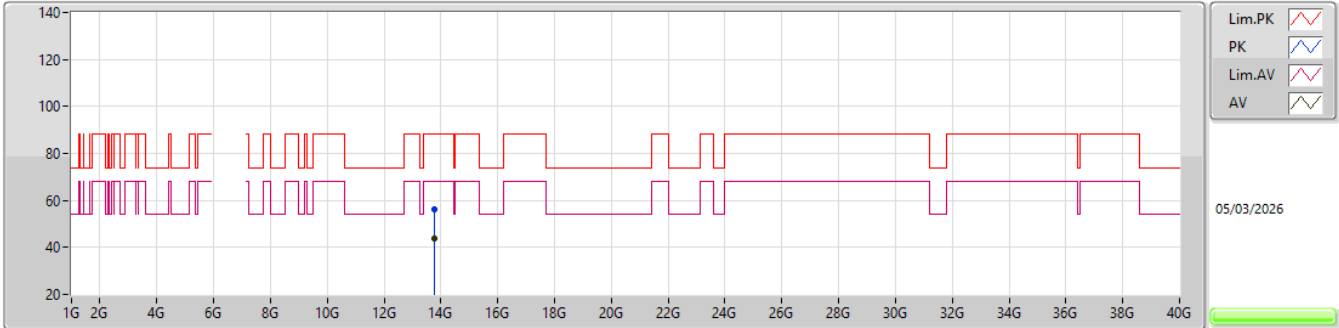


EUT V_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7742G	55.97	88.20	-32.23	45.19	3	Vertical	259	1.26	-	40.60	15.25	45.07			
RMS	13.7742G	44.04	68.20	-24.16	33.26	3	Vertical	259	1.26	-	40.60	15.25	45.07			

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6905MHz_TX

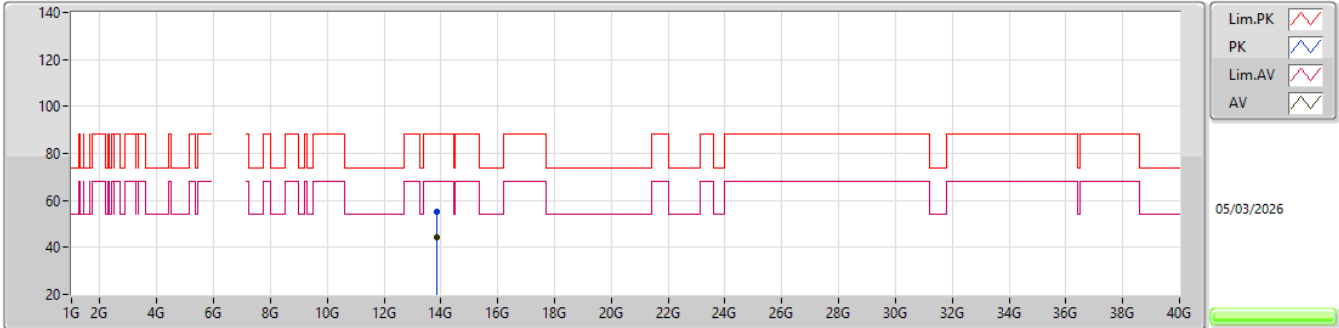


EUT_Y_4TX
Setting 27
01-C-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.8532G	55.43	88.20	-32.77	44.65	3	Horizontal	187	1.80	-	40.61	15.26	45.09			
RMS	13.8752G	44.29	68.20	-23.91	33.42	3	Horizontal	187	1.80	-	40.70	15.26	45.09			

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6905MHz_TX

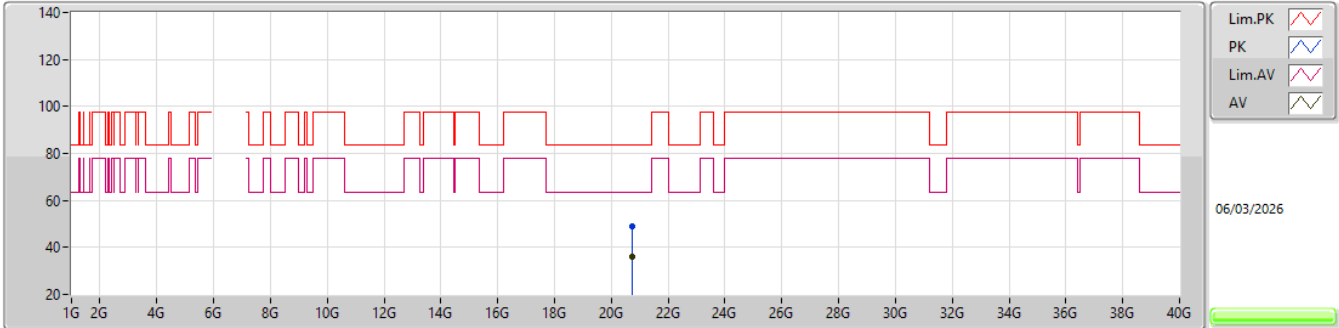


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.71998G	49.22	83.54	-34.32	43.22	1	Vertical	185	1.71	-	37.62	17.28	48.90			
AV	20.71456G	36.00	63.54	-27.54	30.04	1	Vertical	185	1.71	-	37.59	17.27	48.90			

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6905MHz_TX

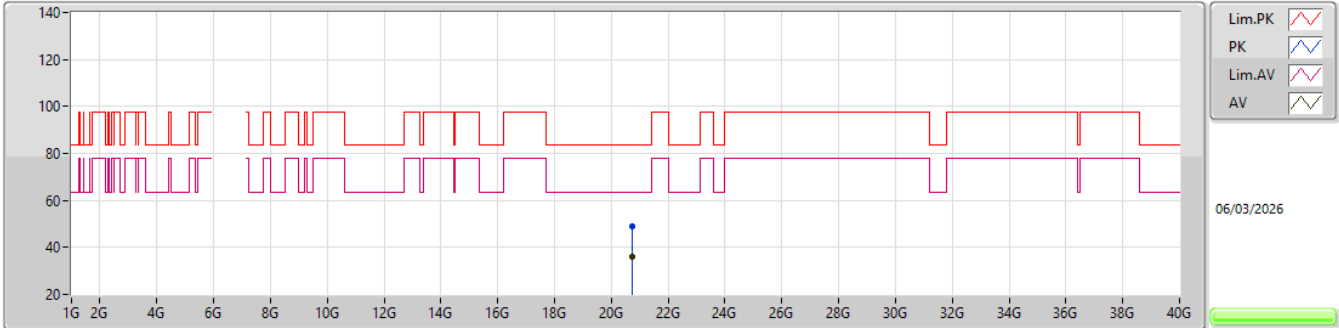

EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.71782G	48.87	83.54	-34.67	42.89	1	Horizontal	265	1.83	-	37.61	17.27	48.90			
AV	20.71462G	35.85	63.54	-27.69	29.89	1	Horizontal	265	1.83	-	37.59	17.27	48.90			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT320-BF_Nss1,(MCS0)_4TX	Pass	AV	7.2842G	53.68	54.00	-0.32	3	Vertical	70.7	1.80	-

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

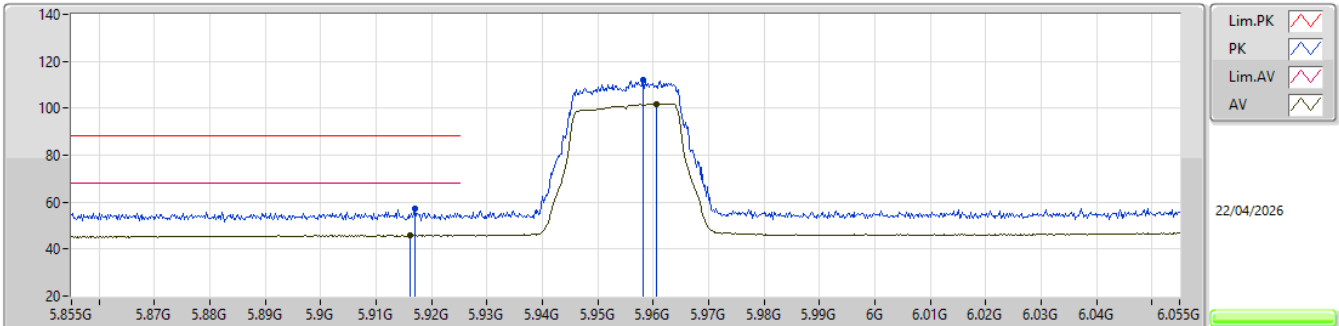


EUT_Y_4TX
Setting 18
04-C-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.917G	57.28	88.20	-30.92	59.25	3	Vertical	287	1.80	-	32.40	9.04	43.41			
RMS	5.9162G	45.99	68.20	-22.21	47.96	3	Vertical	287	1.80	-	32.40	9.04	43.41			
PK	5.9582G	111.93	Inf	-Inf	113.81	3	Vertical	287	1.80	-	32.40	9.09	43.37			
RMS	5.9606G	101.90	Inf	-Inf	103.78	3	Vertical	287	1.80	-	32.40	9.09	43.37			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

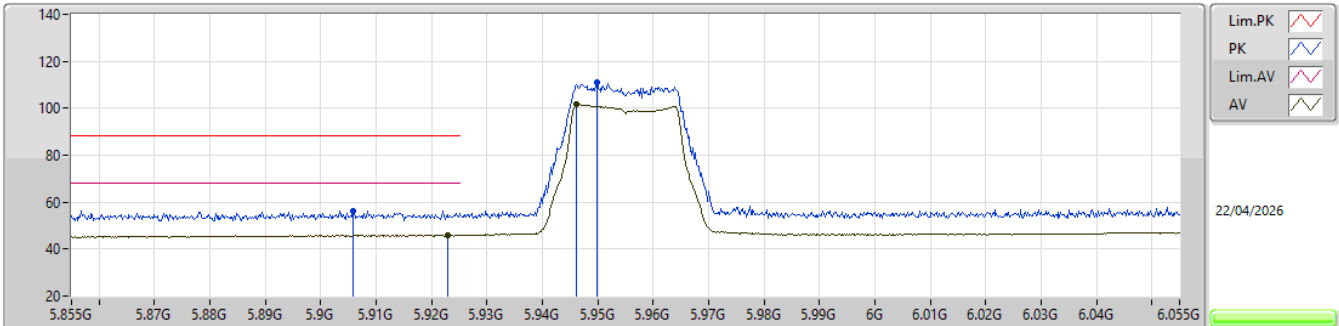


EUT_Y_4TX
Setting 18
04-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9058G	56.29	88.20	-31.91	58.28	3	Horizontal	292	1.80	-	32.40	9.03	43.42			
RMS	5.9228G	45.94	68.20	-22.26	47.89	3	Horizontal	292	1.80	-	32.40	9.05	43.40			
PK	5.9498G	110.80	Inf	-Inf	112.70	3	Horizontal	292	1.80	-	32.40	9.08	43.38			
RMS	5.9462G	101.59	Inf	-Inf	103.49	3	Horizontal	292	1.80	-	32.40	9.08	43.38			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

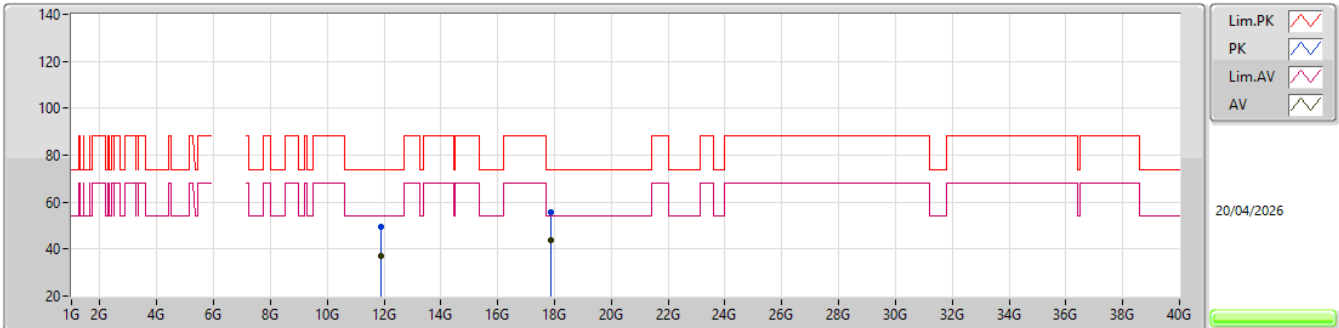


EUT_Y_4TX
Setting 18
04-R-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.91009G	49.48	74.00	-24.52	40.32	3	Vertical	324	1.80	-	38.90	13.50	43.24				
AV	11.91009G	36.99	54.00	-17.01	27.83	3	Vertical	324	1.80	-	38.90	13.50	43.24				
PK	17.86335G	55.79	74.00	-18.21	36.34	3	Vertical	324	1.80	-	46.17	16.31	43.03				
AV	17.87877G	43.99	54.00	-10.01	24.09	3	Vertical	324	1.80	-	46.61	16.31	43.02				

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5955MHz_TX

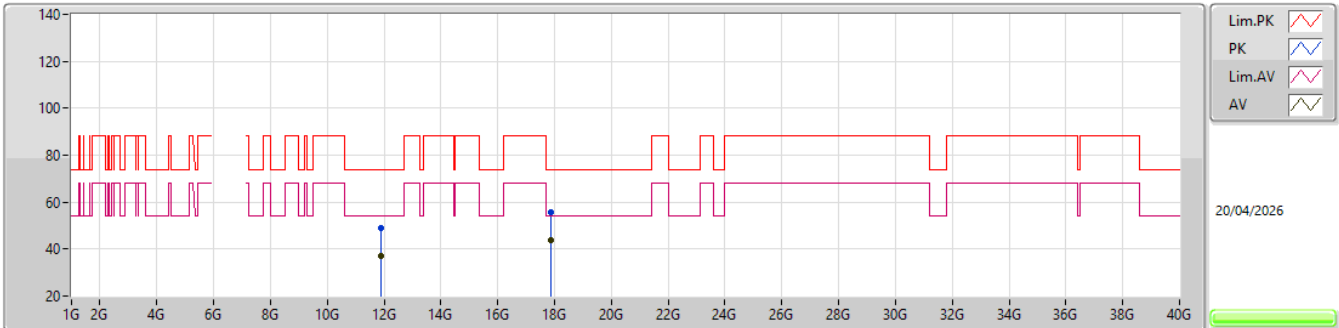EUT_Y_4TX
Setting 18
04-R-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.90997G	49.07	74.00	-24.93	39.91	3	Horizontal	39	1.80	-	38.90	13.50	43.24			
AV	11.9097G	37.09	54.00	-16.91	27.93	3	Horizontal	39	1.80	-	38.90	13.50	43.24			
PK	17.87028G	55.63	74.00	-18.37	35.97	3	Horizontal	337	1.80	-	46.37	16.31	43.02			
AV	17.87799G	43.96	54.00	-10.04	24.09	3	Horizontal	337	1.80	-	46.58	16.31	43.02			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

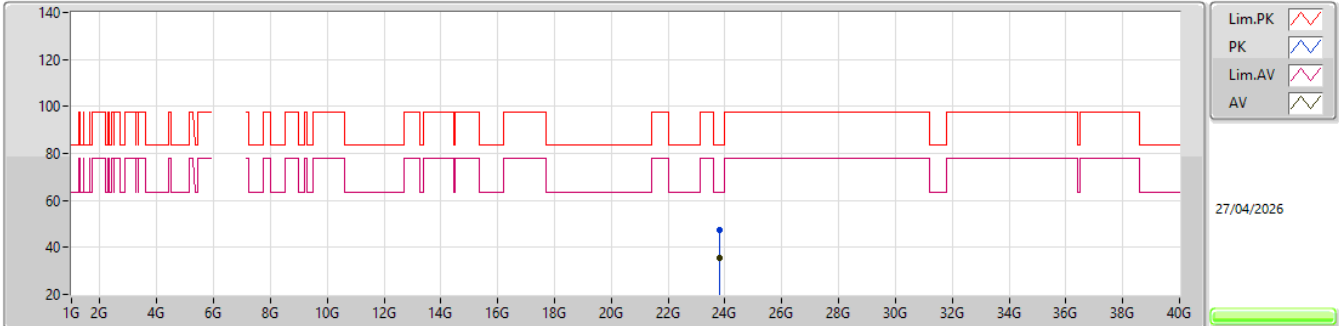


EUT Y_4TX
Setting 18
04-R-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82036G	47.49	83.54	-36.05	38.37	1	Vertical	336	2.29	-	38.90	18.12	47.90			
AV	23.8239G	35.42	63.54	-28.12	26.30	1	Vertical	336	2.29	-	38.90	18.12	47.90			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5955MHz_TX

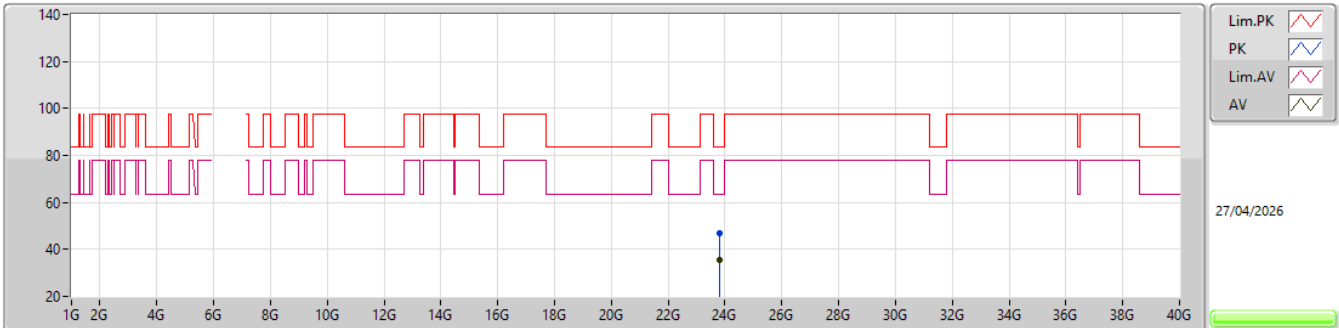EUT Y_4TX
Setting 18
04-R-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81493G	47.10	83.54	-36.44	37.99	1	Horizontal	297	1.23	-	38.90	18.11	47.90			
AV	23.81877G	35.45	63.54	-28.09	26.34	1	Horizontal	297	1.23	-	38.90	18.11	47.90			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

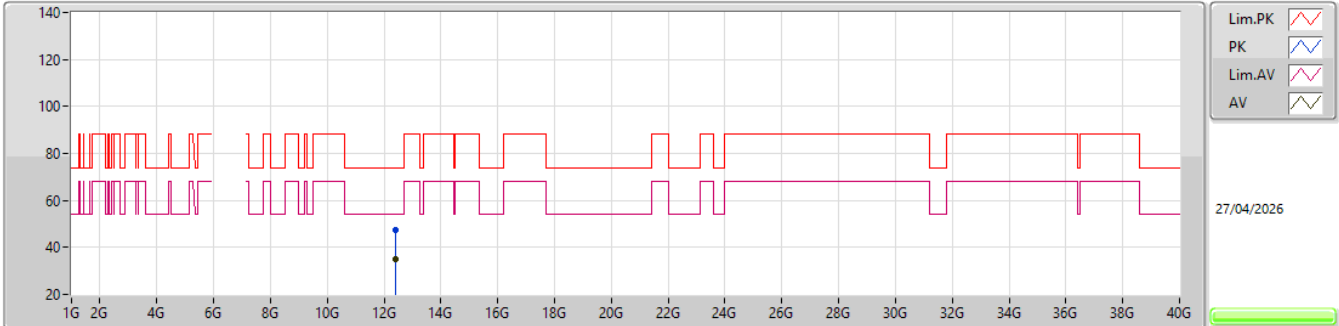


EUT_Y_4TX
Setting 16
04-R-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.39046G	47.38	74.00	-26.62	38.07	3	Vertical	72	2.11	-	38.82	13.95	43.46			
AV	12.3909G	34.84	54.00	-19.16	25.53	3	Vertical	72	2.11	-	38.82	13.95	43.46			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

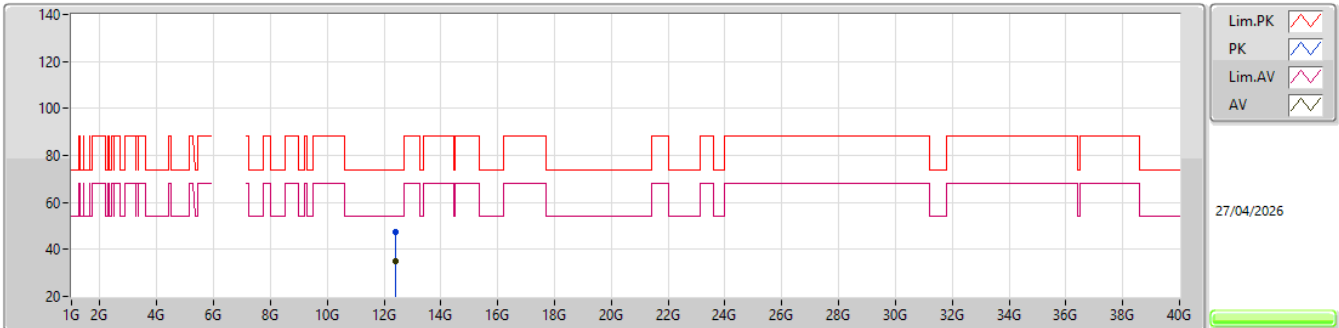


EUT_Y_4TX
Setting 16
04-R-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38938G	47.62	74.00	-26.38	38.31	3	Horizontal	155	1.34	-	38.82	13.95	43.46			
AV	12.38937G	34.75	54.00	-19.25	25.44	3	Horizontal	155	1.34	-	38.82	13.95	43.46			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

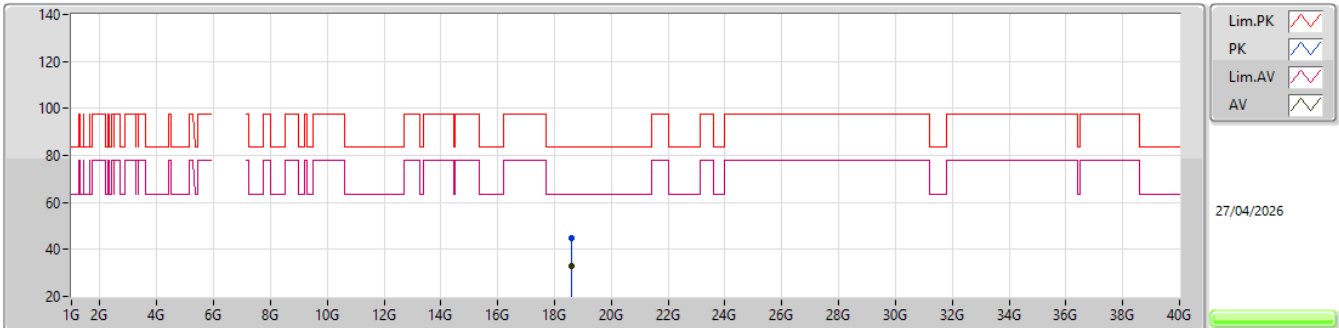


EUT Y_4TX
Setting 16
04-R-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58501G	44.83	83.54	-38.71	40.10	1	Vertical	291	1.54	-	37.64	15.74	48.65			
AV	18.58599G	32.82	63.54	-30.72	28.09	1	Vertical	291	1.54	-	37.64	15.74	48.65			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

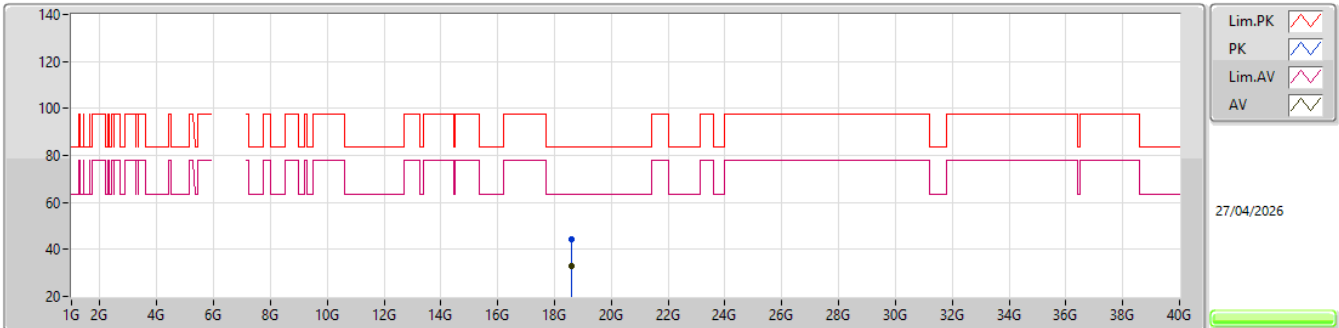


EUT Y_4TX
Setting 16
04-R-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58543G	44.43	83.54	-39.11	39.70	1	Horizontal	198	1.55	-	37.64	15.74	48.65			
AV	18.58558G	32.81	63.54	-30.73	28.08	1	Horizontal	198	1.55	-	37.64	15.74	48.65			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

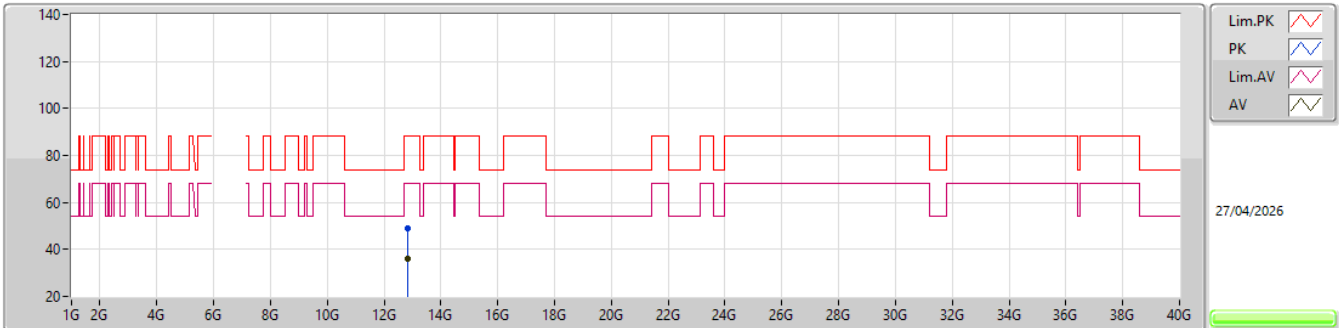


EUT Y_4TX
Setting 16
04-R-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82902G	49.15	88.20	-39.05	39.22	3	Vertical	185	2.84	-	39.06	14.37	43.50			
RMS	12.83043G	36.27	68.20	-31.93	26.33	3	Vertical	185	2.84	-	39.06	14.38	43.50			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


6415MHz_TX

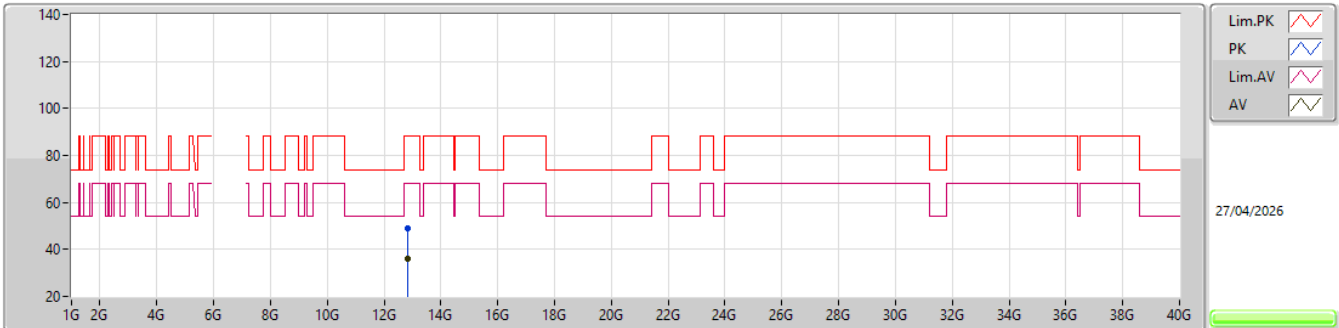EUT_Y_4TX
Setting 16
04-R-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.82923G	48.77	88.20	-39.43	38.84	3	Horizontal	83	2.68	-	39.06	14.37	43.50			
RMS	12.83031G	36.27	68.20	-31.93	26.33	3	Horizontal	83	2.68	-	39.06	14.38	43.50			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

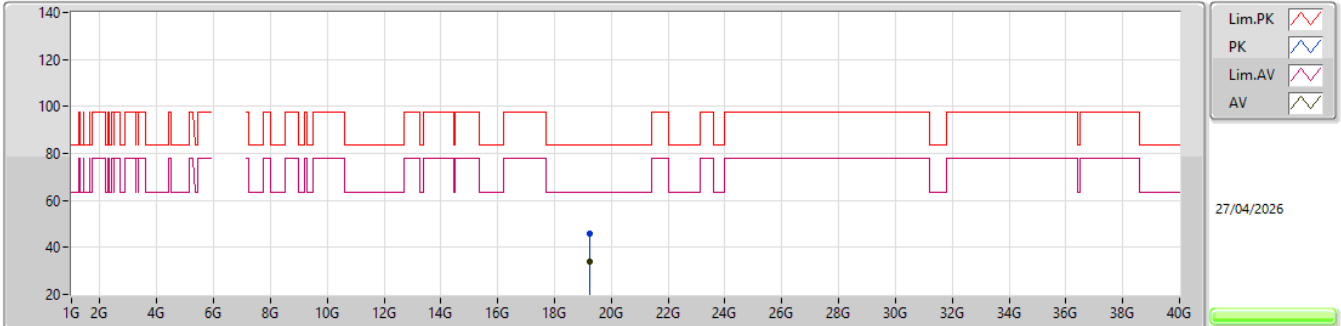


EUT Y_4TX
Setting 16
04-R-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24496G	46.07	83.54	-37.47	41.00	1	Vertical	16	1.55	-	37.87	16.05	48.85			
AV	19.24444G	34.13	63.54	-29.41	29.06	1	Vertical	16	1.55	-	37.87	16.05	48.85			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

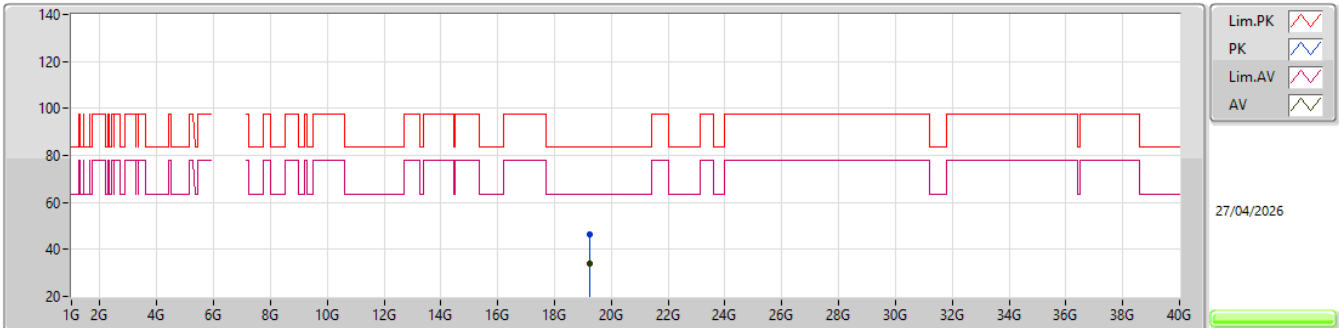


EUT Y_4TX
Setting 16
04-R-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24419G	46.50	83.54	-37.04	41.43	1	Horizontal	339	1.52	-	37.87	16.05	48.85			
AV	19.24538G	34.13	63.54	-29.41	29.06	1	Horizontal	339	1.52	-	37.87	16.05	48.85			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

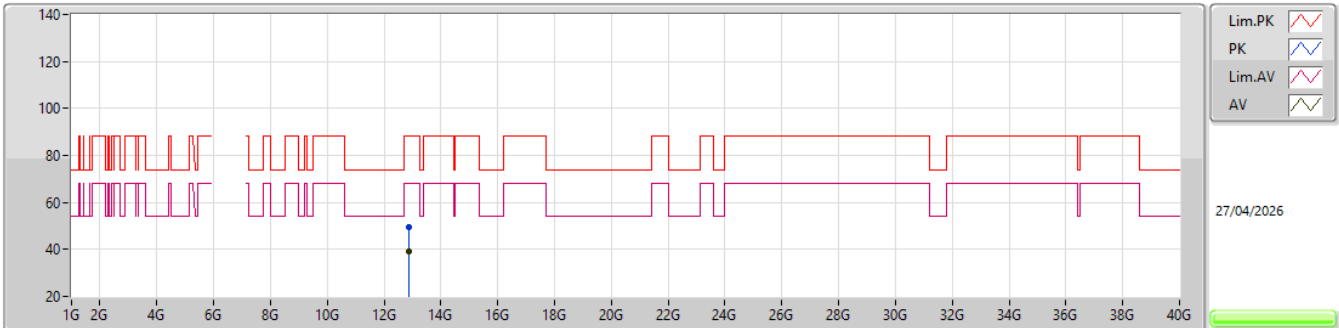


EUT_Y_4TX
Setting 18
04-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.87003G	49.49	88.20	-38.71	39.48	3	Vertical	357	1.80	-	39.10	14.41	43.50			
RMS	12.86994G	38.97	68.20	-29.23	28.96	3	Vertical	357	1.80	-	39.10	14.41	43.50			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

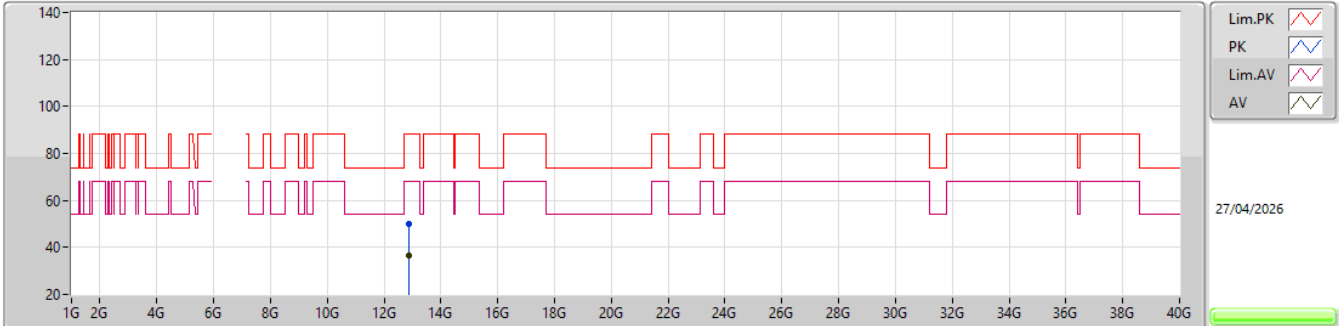


EUT_Y_4TX
Setting 18
04-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.87708G	50.03	88.20	-38.17	40.00	3	Horizontal	360	2.94	-	39.10	14.42	43.49			
RMS	12.87369G	36.36	68.20	-31.84	26.34	3	Horizontal	360	2.94	-	39.10	14.42	43.50			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

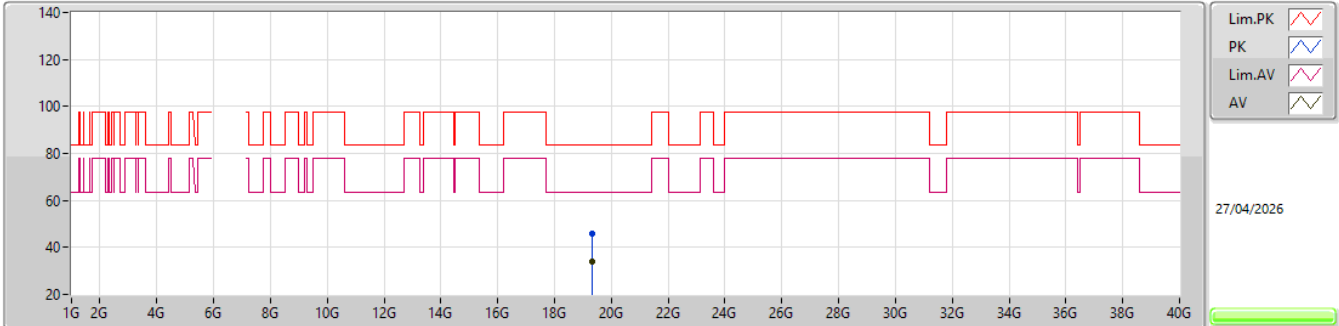

EUT Y_4TX
Setting 18
04-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.30465G	45.64	83.54	-37.90	40.80	1	Vertical	148	1.51	-	37.61	16.07	48.84			
AV	19.3047G	33.87	63.54	-29.67	29.03	1	Vertical	148	1.51	-	37.61	16.07	48.84			