



Test Mode: 802.11n HT20


Test Mode: 802.11n HT20 Chain0 CH1

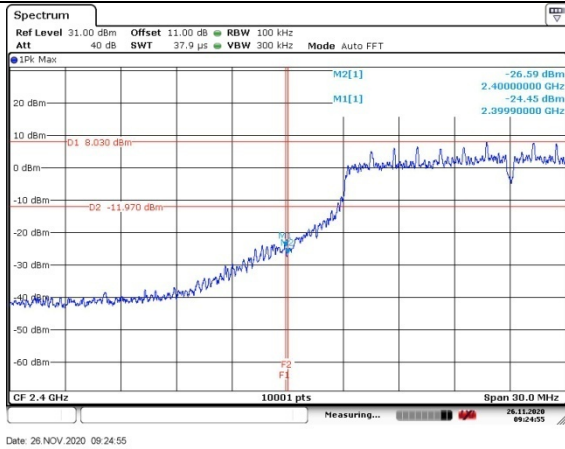


Test Mode: 802.11n HT20 Chain0 CH11

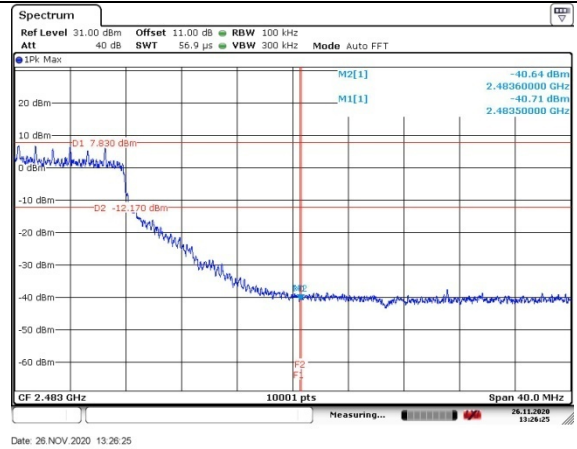

Test Mode: 802.11n HT20 Chain1 CH1

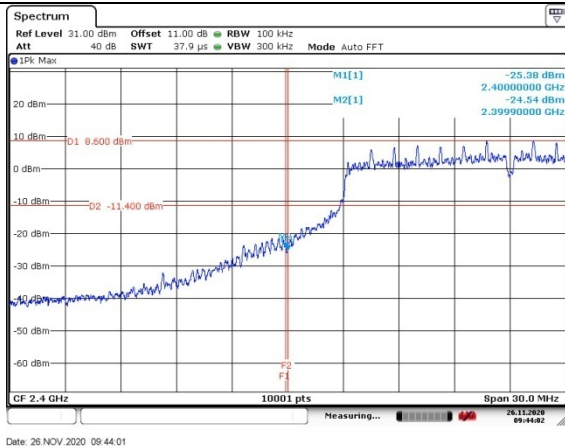


Test Mode: 802.11n HT20 Chain1 CH11

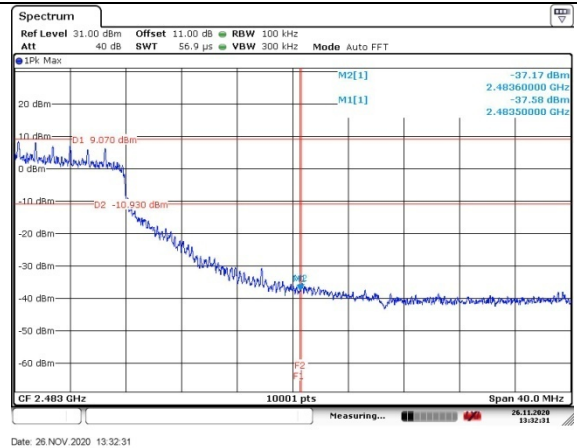


Test Mode: 802.11n HT40

Test Mode: 802.11n HT40 Chain0 CH3

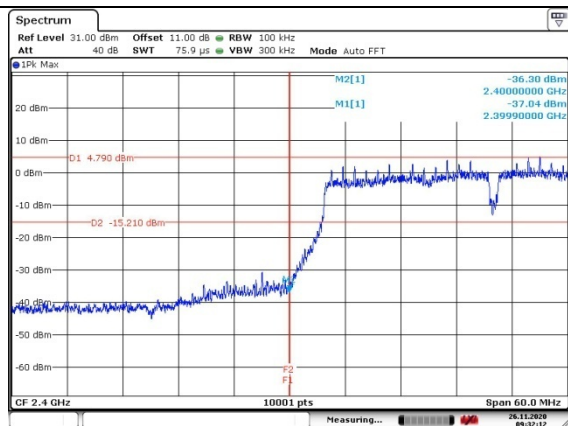


Date: 26 NOV 2020 09:32:12

Test Mode: 802.11n HT40 Chain0 CH9

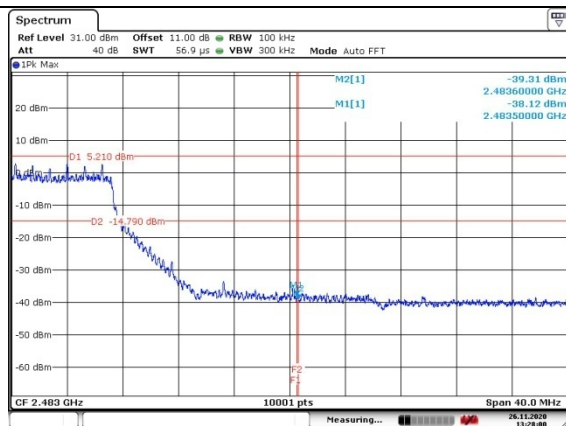


Date: 26 NOV 2020 13:28:00

Test Mode: 802.11n HT40 Chain1 CH3

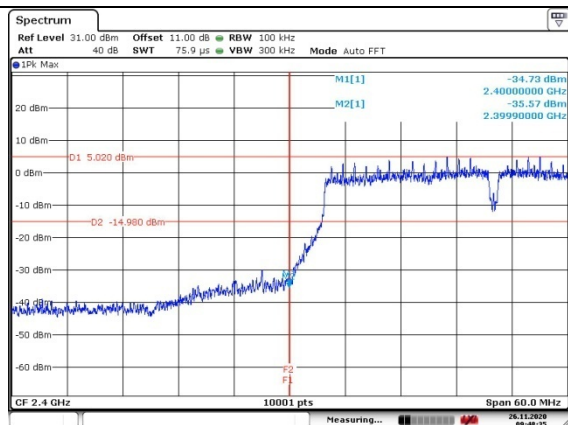

Date: 26 NOV 2020 09:48:36

Test Mode: 802.11n HT40 Chain1 CH9

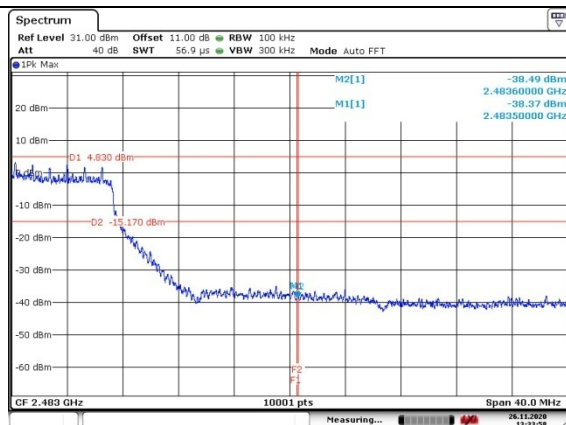

Date: 26 NOV 2020 13:33:58

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The worst case attitude: The EUT lay down.

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (103.70 dBuV/m) = (69.70 dBμV) + (8.90 dB) + (25.10 dB), the corresponding frequency is 2412MHz.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	101.21	67.21	N/A	N/A	8.90	25.10
2	2390	39.41	5.41	-34.59	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	96.93	62.93	N/A	N/A	8.90	25.10
2	2390	36.96	2.96	-37.04	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	95.48	61.48	N/A	N/A	8.90	25.10
2	2390	30.85	-3.15	-23.15	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	93.95	59.95	N/A	N/A	8.90	25.10
2	2390	28.70	-5.30	-25.30	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	100.61	66.61	N/A	N/A	8.90	25.10
2	2483.5	40.12	6.12	-33.88	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.44	62.44	N/A	N/A	8.90	25.10
2	2483.5	37.96	3.96	-36.04	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	94.05	60.05	N/A	N/A	8.90	25.10
2	2483.5	31.15	-2.85	-22.85	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	92.38	58.38	N/A	N/A	8.90	25.10
2	2483.5	29.94	-4.06	-24.06	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	101.18	67.18	N/A	N/A	8.90	25.10
2	2390	38.34	4.34	-35.66	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	96.88	62.88	N/A	N/A	8.90	25.10
2	2390	36.70	2.70	-37.30	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	94.56	60.56	N/A	N/A	8.90	25.10
2	2390	30.47	-3.53	-23.53	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	92.62	58.62	N/A	N/A	8.90	25.10
2	2390	28.85	-5.15	-25.15	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	100.50	66.50	N/A	N/A	8.90	25.10
2	2483.5	38.01	4.01	-35.99	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.20	62.20	N/A	N/A	8.90	25.10
2	2483.5	34.46	0.46	-39.54	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	95.15	61.15	N/A	N/A	8.90	25.10
2	2483.5	30.07	-3.93	-23.93	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	92.93	58.93	N/A	N/A	8.90	25.10
2	2483.5	27.87	-6.13	-26.13	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	101.09	67.09	N/A	N/A	8.90	25.10
2	2390	39.33	5.33	-34.67	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	96.71	62.71	N/A	N/A	8.90	25.10
2	2390	36.44	2.44	-37.56	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	94.00	60.00	N/A	N/A	8.90	25.10
2	2390	31.06	-2.94	-22.94	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	92.13	58.13	N/A	N/A	8.90	25.10
2	2390	29.57	-4.43	-24.43	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	100.79	66.79	N/A	N/A	8.90	25.10
2	2483.5	39.05	5.05	-34.95	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.57	62.57	N/A	N/A	8.90	25.10
2	2483.5	35.15	1.15	-38.85	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	95.24	61.24	N/A	N/A	8.90	25.10
2	2483.5	31.74	-2.26	-22.26	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	93.72	59.72	N/A	N/A	8.90	25.10
2	2483.5	31.17	-2.83	-22.83	54.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	100.79	66.79	N/A	N/A	8.90	25.10
2	2390	40.51	6.51	-33.49	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	96.79	62.79	N/A	N/A	8.90	25.10
2	2390	37.26	3.26	-36.74	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	93.94	59.94	N/A	N/A	8.90	25.10
2	2390	30.06	-3.94	-23.94	54.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	91.15	57.15	N/A	N/A	8.90	25.10
2	2390	29.44	-4.56	-24.56	54.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	100.84	66.84	N/A	N/A	8.90	25.10
2	2483.5	38.55	4.55	-35.45	74.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.96	62.96	N/A	N/A	8.90	25.10
2	2483.5	34.87	0.87	-39.13	74.00	8.90	25.10


Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	94.79	60.79	N/A	N/A	8.90	25.10
2	2483.5	32.00	-2.00	-22.00	54.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	2462	92.34	58.34	N/A	N/A	8.90	25.10
2	2483.5	29.92	-4.08	-24.08	54.00	8.90	25.10

Full Spectrum

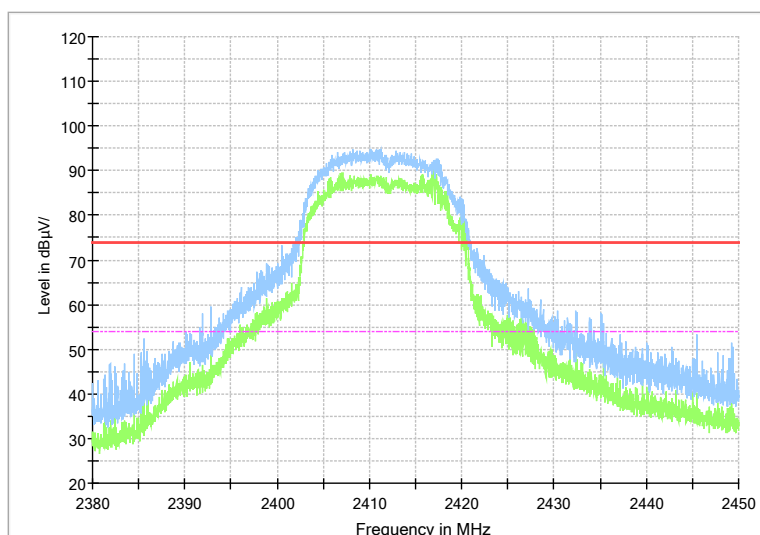

Carrier frequency (MHz): 2412
Channel No.:1
Frequency Range: 2380MHz -2450MHz
Detector: Av mode and PK mode
Test Mode: 802.11b

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(28.62 \text{ dB}\mu\text{V/m}) = (46.72 \text{ dB}\mu\text{V}) + (-18.1 \text{ dB/m})$, the corresponding frequency is 40.427500MHz.

The worst case attitude: The EUT lay down.

For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.552000	23.87	-20.7	44.57	Vertical	40.00
58.324000	12.31	-18.2	30.51	Vertical	40.00
160.319500	18.79	-21.2	39.99	Vertical	43.50
176.276000	17.97	-20.3	38.27	Vertical	43.50
544.294000	12.28	-8.1	20.38	Vertical	46.00
933.458000	17.18	-1.0	18.18	Vertical	46.00

For 802.11g Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.328000	23.16	-20.5	43.66	Vertical	40.00
83.883500	11.37	-22.6	33.97	Vertical	40.00
160.368000	18.87	-21.2	40.07	Vertical	43.50
176.470000	17.77	-20.3	38.07	Vertical	43.50
556.564500	12.10	-7.8	19.90	Vertical	46.00
908.626000	16.93	-1.4	18.33	Vertical	46.00

For 802.11n(HT20) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.097000	21.91	-21.1	43.01	Vertical	40.00
87.521000	11.92	-21.4	33.32	Vertical	40.00
172.978000	18.04	-20.5	38.54	Vertical	43.50
173.220500	18.11	-20.5	38.61	Vertical	43.50
556.855500	12.22	-7.8	20.02	Vertical	46.00
950.093500	17.21	-0.9	18.11	Vertical	46.00

For 802.11b Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.443500	21.34	-20.2	41.54	Vertical	40.00
87.230000	13.99	-21.5	35.49	Vertical	40.00
159.883000	18.72	-21.2	39.92	Vertical	43.50
175.548500	17.96	-20.4	38.36	Vertical	43.50
522.129500	11.35	-8.7	20.05	Vertical	46.00
926.425500	17.19	-1.1	18.29	Vertical	46.00

For 802.11g Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.928500	20.06	-20.0	40.06	Vertical	40.00
87.230000	13.82	-21.5	35.32	Vertical	40.00
160.416500	18.86	-21.2	40.06	Vertical	43.50
175.888000	18.01	-20.3	38.31	Vertical	43.50
510.053000	11.26	-9.0	20.26	Vertical	46.00
922.109000	17.03	-1.2	18.23	Vertical	46.00

For 802.11n(HT20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.921500	23.21	-20.9	44.11	Vertical	40.00
86.890500	13.57	-21.6	35.17	Vertical	40.00
161.483500	18.15	-21.1	39.25	Vertical	43.50
175.742500	18.04	-20.4	38.44	Vertical	43.50
522.081000	11.41	-8.7	20.11	Vertical	46.00
931.275500	17.18	-1.1	18.28	Vertical	46.00

For 802.11b Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
46.926500	19.48	-17.4	36.88	Vertical	40.00
87.909000	13.90	-21.3	35.20	Vertical	40.00
161.241000	18.37	-21.1	39.47	Vertical	43.50
176.130500	17.86	-20.3	38.16	Vertical	43.50
544.827500	12.25	-8.1	20.35	Vertical	46.00
899.944500	16.94	-1.5	18.44	Vertical	46.00

For 802.11g Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.194000	22.12	-21.1	43.22	Vertical	40.00
87.909000	13.71	-21.3	35.01	Vertical	40.00
173.075000	17.99	-20.5	38.49	Vertical	43.50
173.366000	17.72	-20.5	38.22	Vertical	43.50
557.098000	12.36	-7.8	20.16	Vertical	46.00
939.860000	17.22	-1.0	18.22	Vertical	46.00

For 802.11n(HT20) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.607500	18.56	-19.8	38.36	Vertical	40.00
86.260000	13.89	-21.8	35.69	Vertical	40.00
160.319500	18.97	-21.2	40.17	Vertical	43.50
175.597000	17.86	-20.4	38.26	Vertical	43.50
544.439500	12.31	-8.1	20.41	Vertical	46.00
925.892000	17.12	-1.1	18.22	Vertical	46.00

For 802.11n(HT40) Channel No.:3

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.716000	22.65	-20.4	43.05	Vertical	40.00
86.890500	13.89	-21.6	35.49	Vertical	40.00
160.465000	18.89	-21.2	40.09	Vertical	43.50
176.955000	17.13	-20.3	37.43	Vertical	43.50
537.164500	12.07	-8.3	20.37	Vertical	46.00
936.125500	17.13	-1.0	18.13	Vertical	46.00


For 802.11n(HT40) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.358000	23.79	-20.8	44.59	Vertical	40.00
58.760500	12.77	-18.2	30.97	Vertical	40.00
160.028500	18.90	-21.2	40.10	Vertical	43.50
173.269000	17.79	-20.5	38.29	Vertical	43.50
557.340500	12.42	-7.7	20.12	Vertical	46.00
959.599500	17.27	-0.7	17.97	Vertical	46.00


For 802.11n(HT40) Channel No.:9

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.679000	22.84	-21.0	43.84	Vertical	40.00
79.761000	12.11	-23.9	36.01	Vertical	40.00
160.707500	18.77	-21.2	39.97	Vertical	43.50
175.985000	17.79	-20.3	38.09	Vertical	43.50
535.612500	11.80	-8.3	20.10	Vertical	46.00
922.982000	16.97	-1.2	18.17	Vertical	46.00


Carrier frequency (MHz): 2412
Channel No.:1

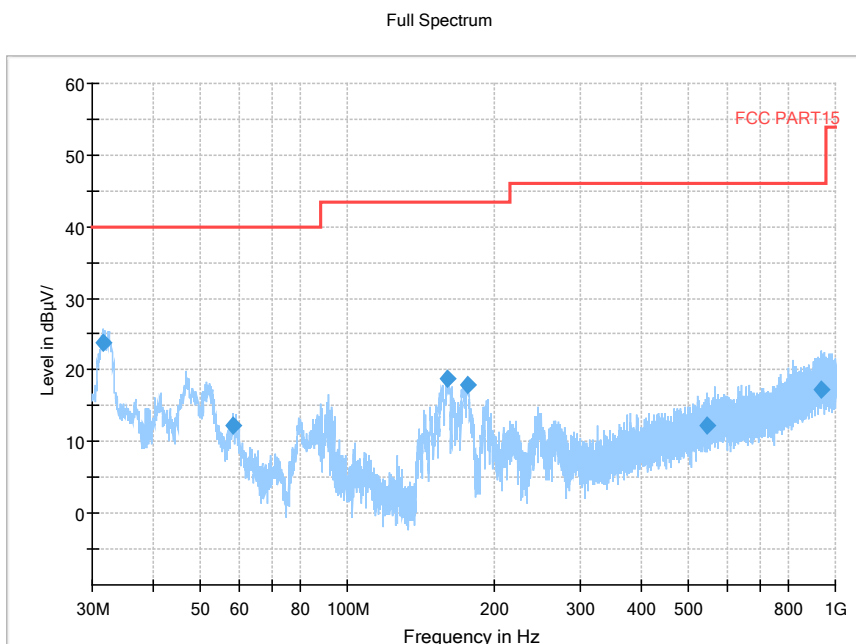


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

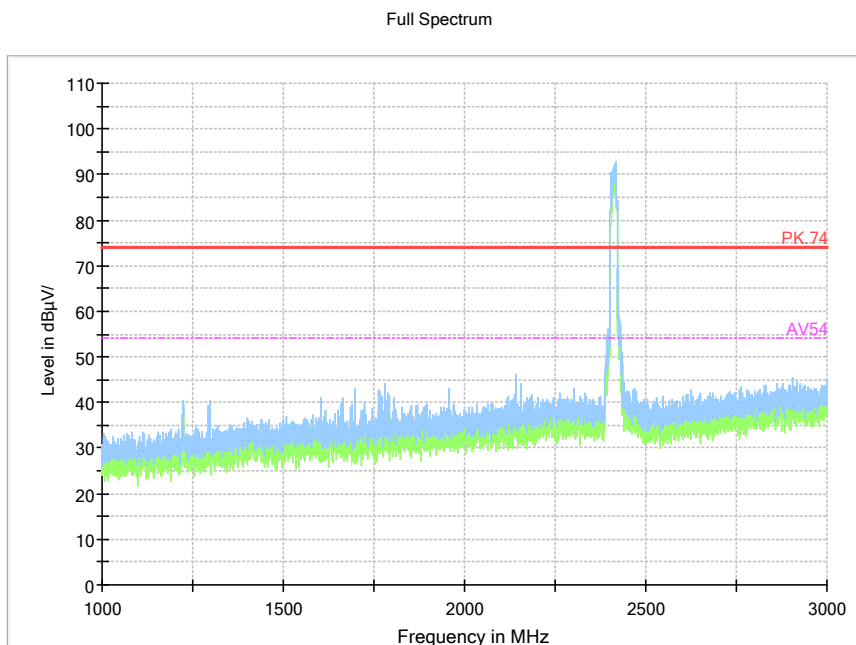

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

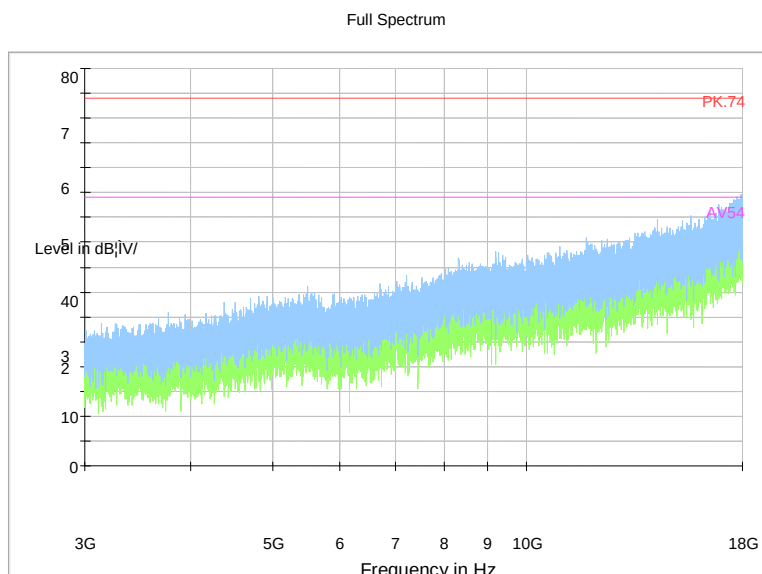


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

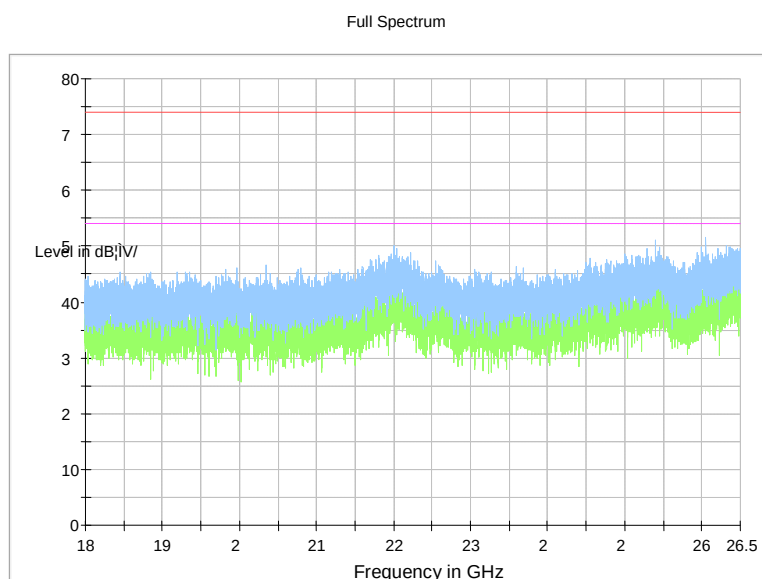


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

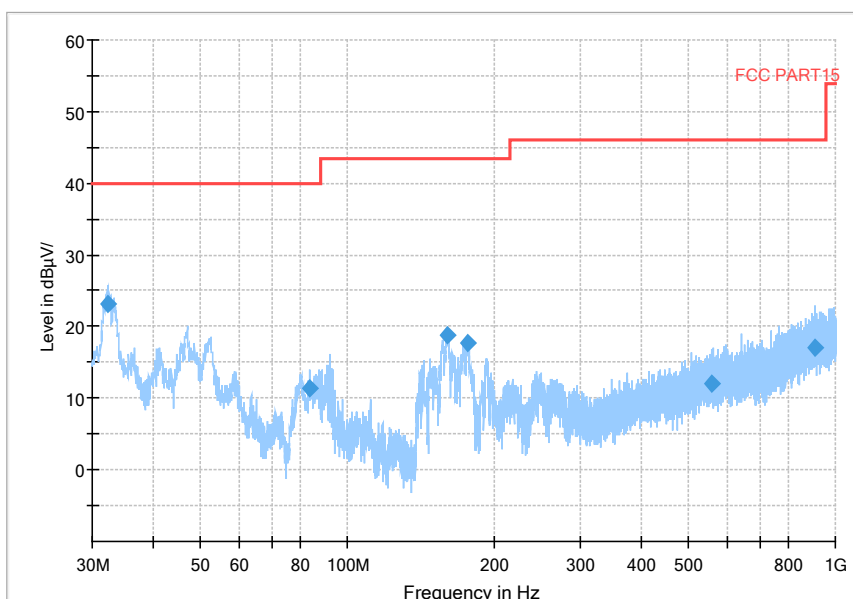


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g

Full Spectrum

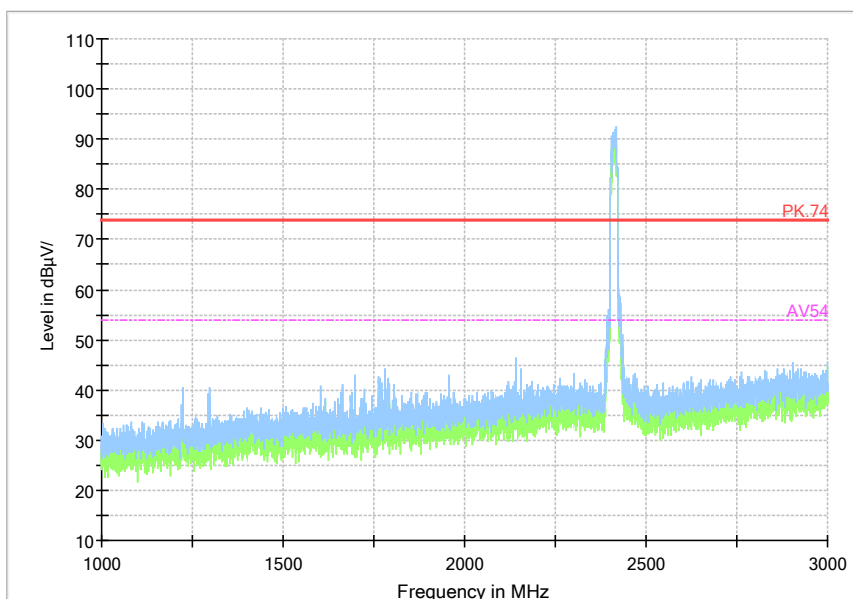


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

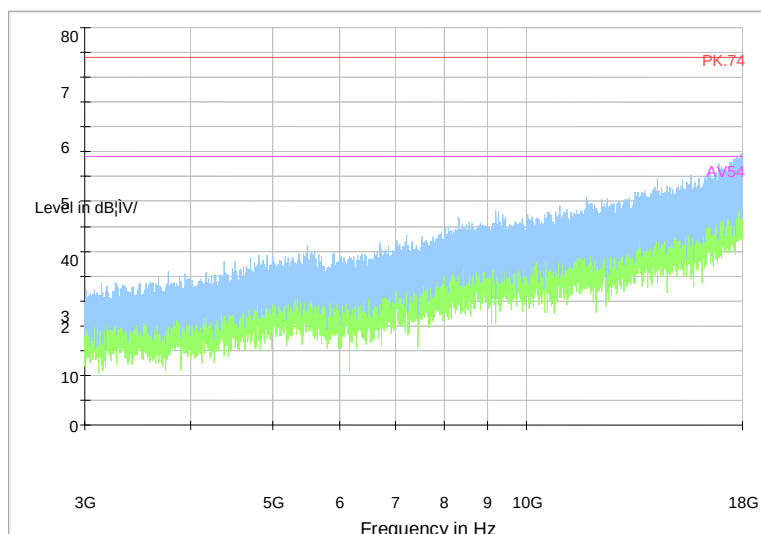


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

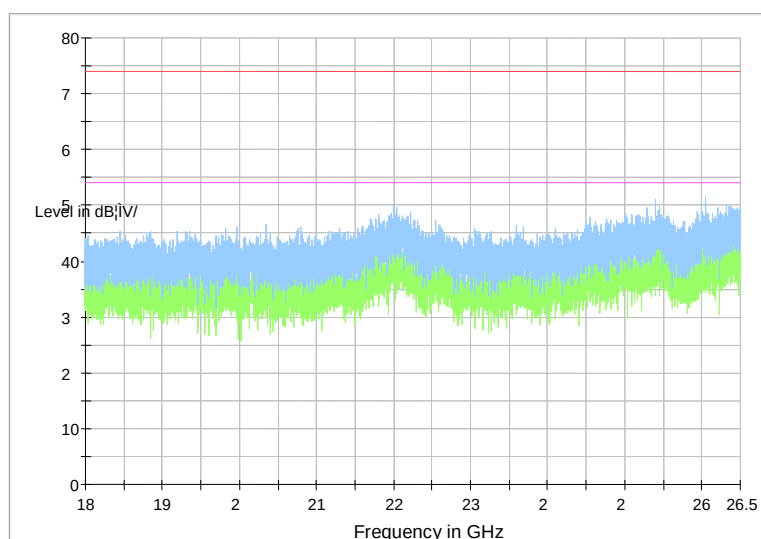


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

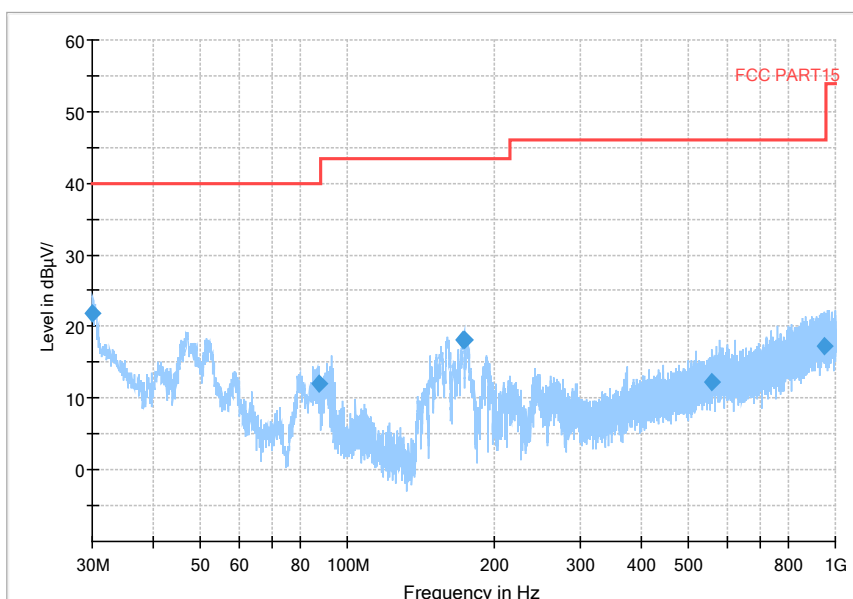


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

Full Spectrum

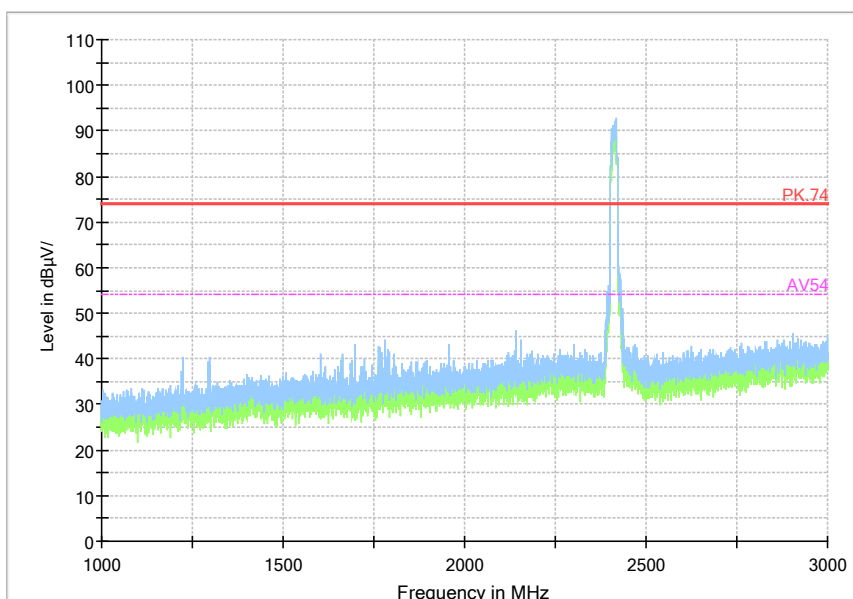


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

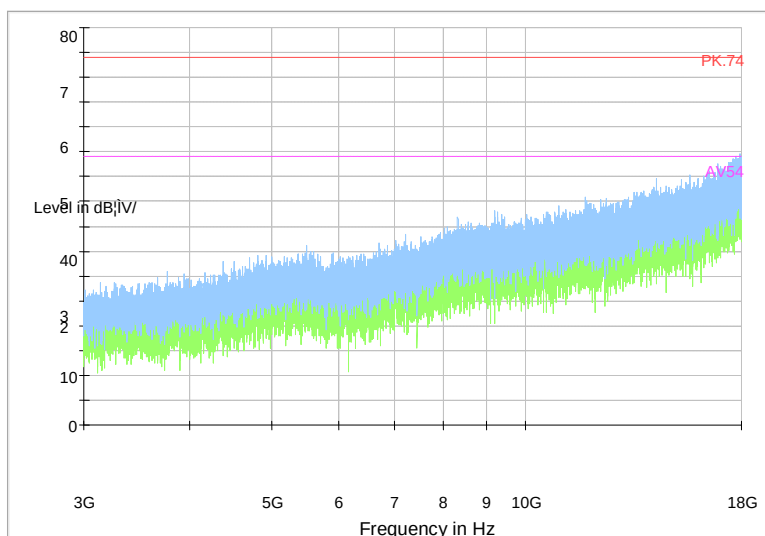


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

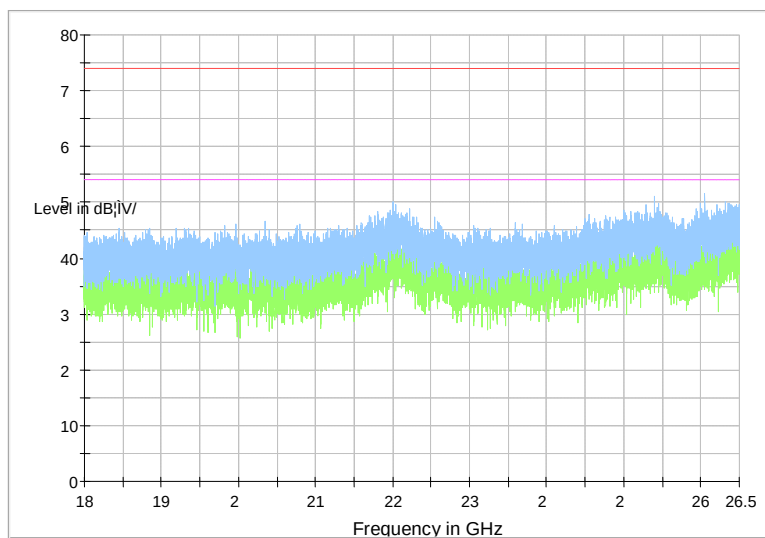


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Carrier frequency (MHz): 2437
Channel No.:6

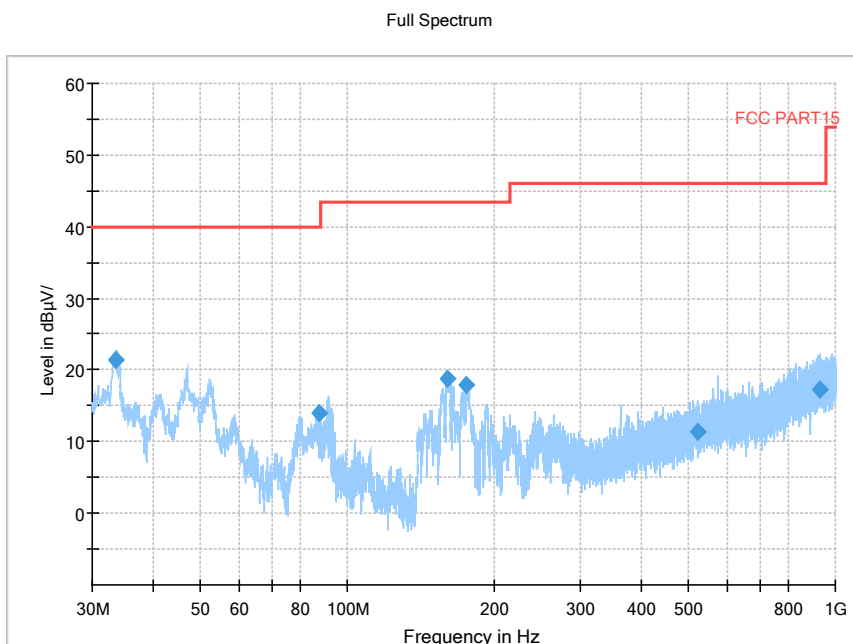


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

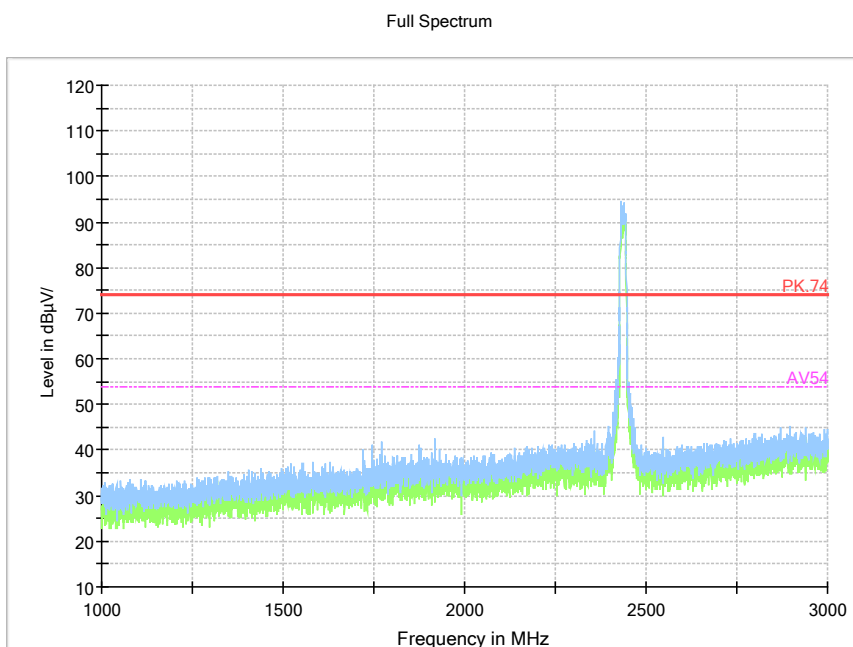

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

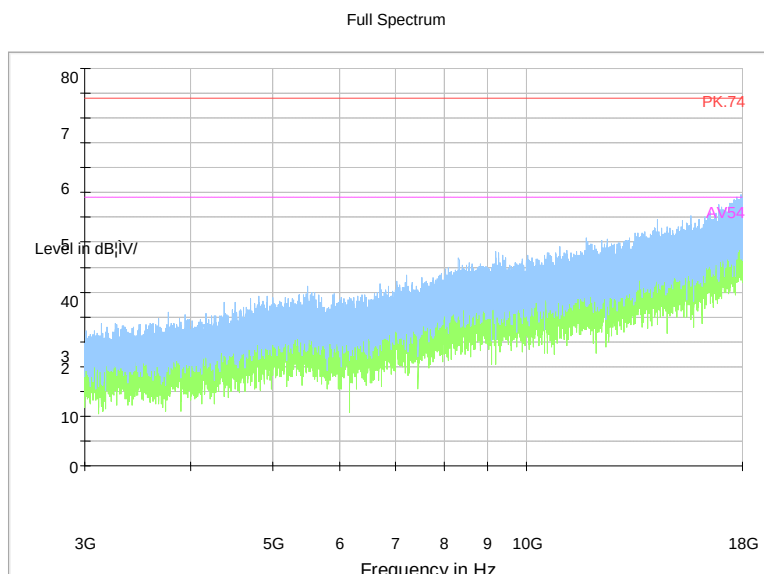


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

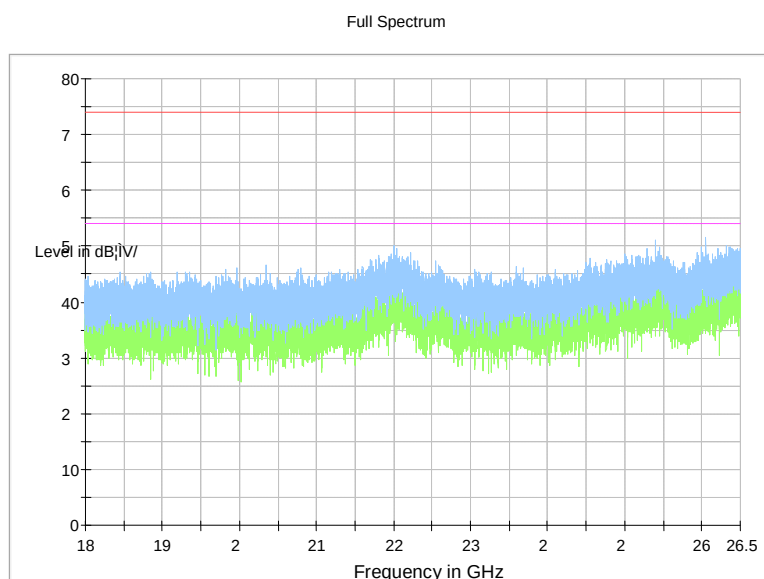

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

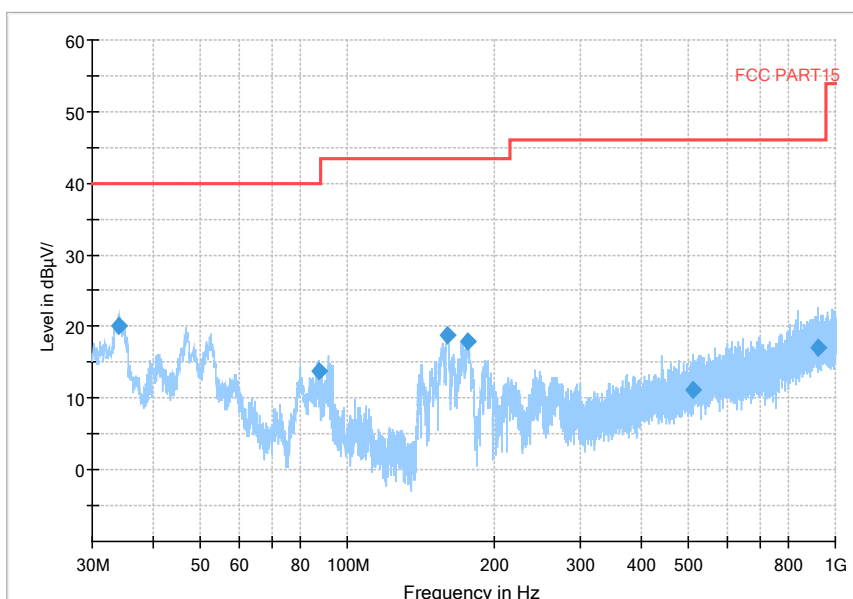


Frequency Range: 30MHz -1GHz

Detector: QP mode

Modulation type: 802.11g

Full Spectrum

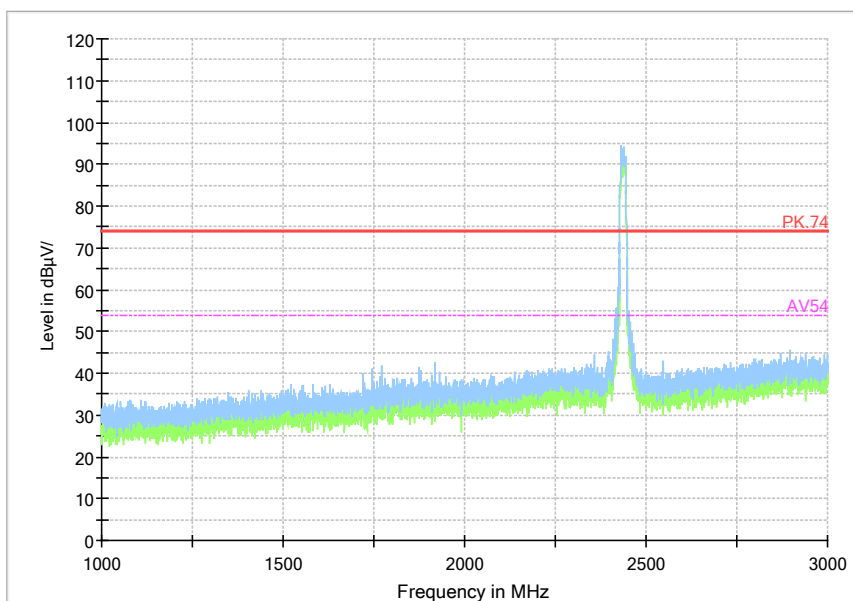


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode


Modulation type: 802.11g

Full Spectrum

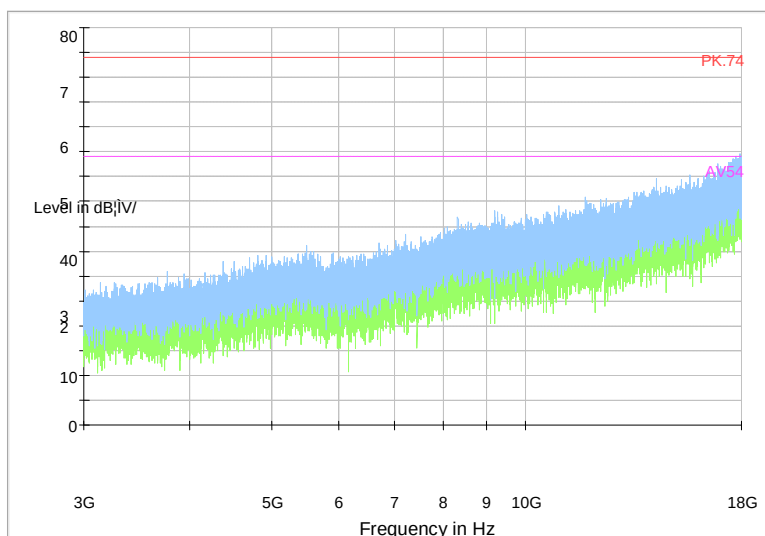


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

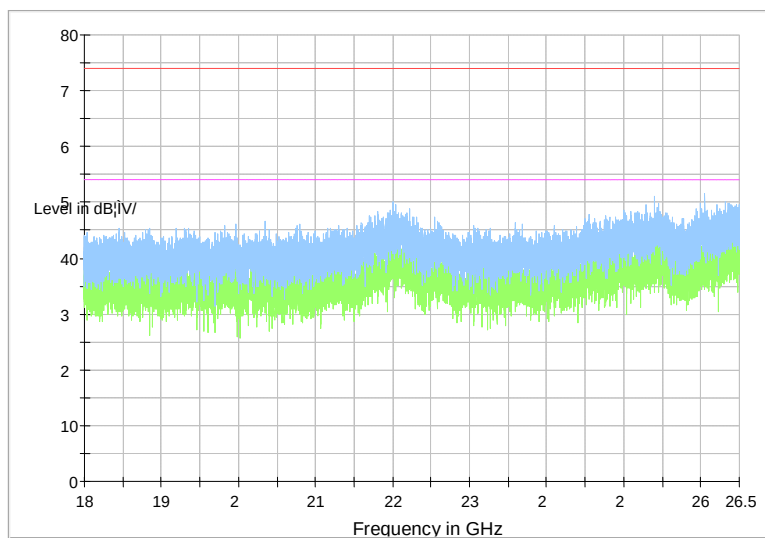


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

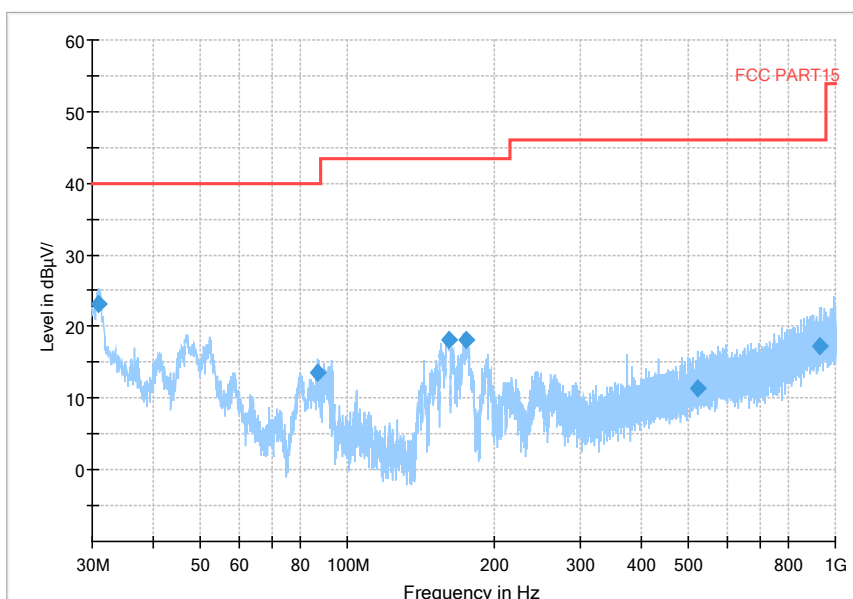


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

Full Spectrum

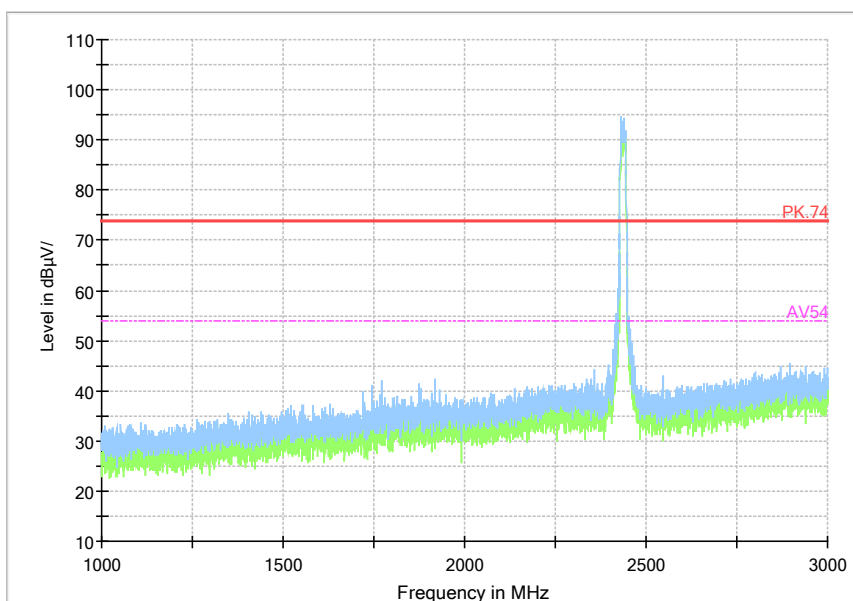


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

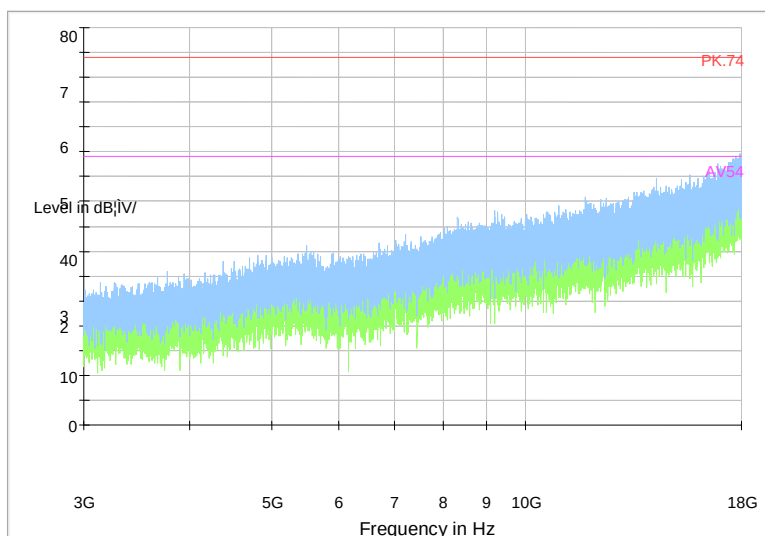

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

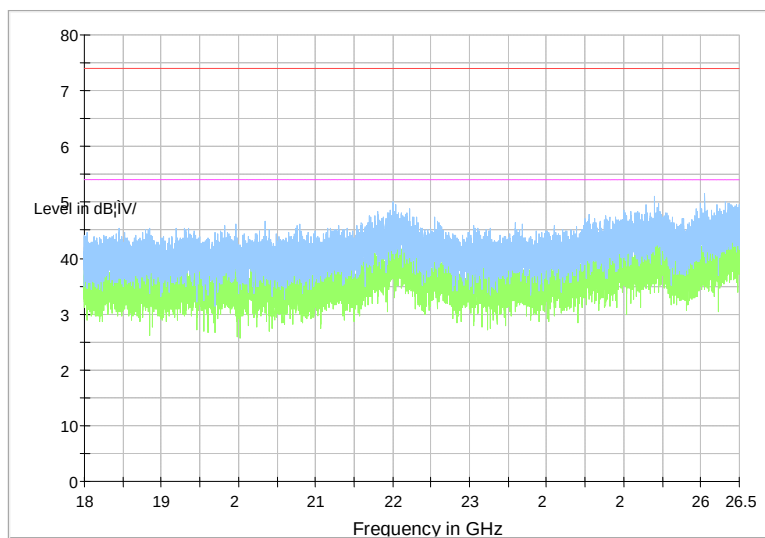

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2462
Channel No.:11

Full Spectrum

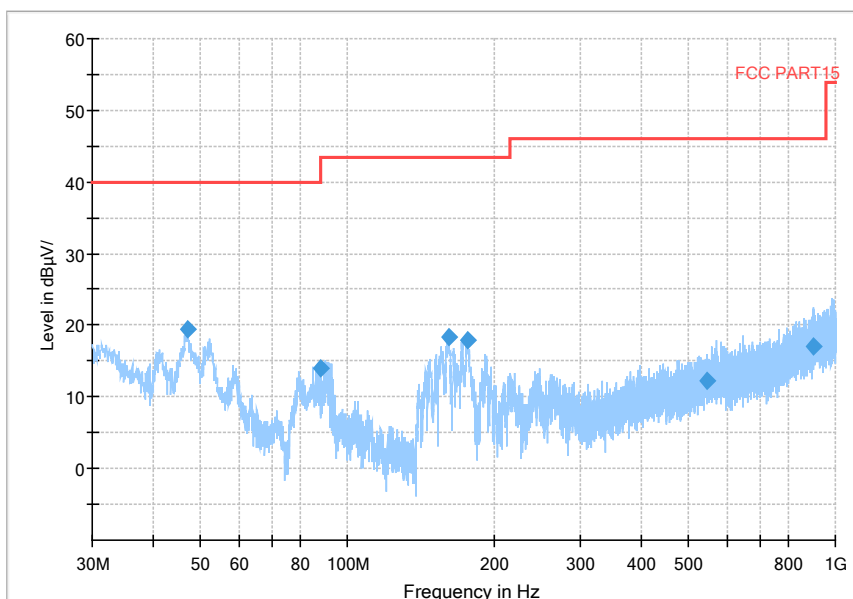


Frequency Range: 30MHz -1GHz

Detector: QP mode

Test Mode: 802.11b


Full Spectrum

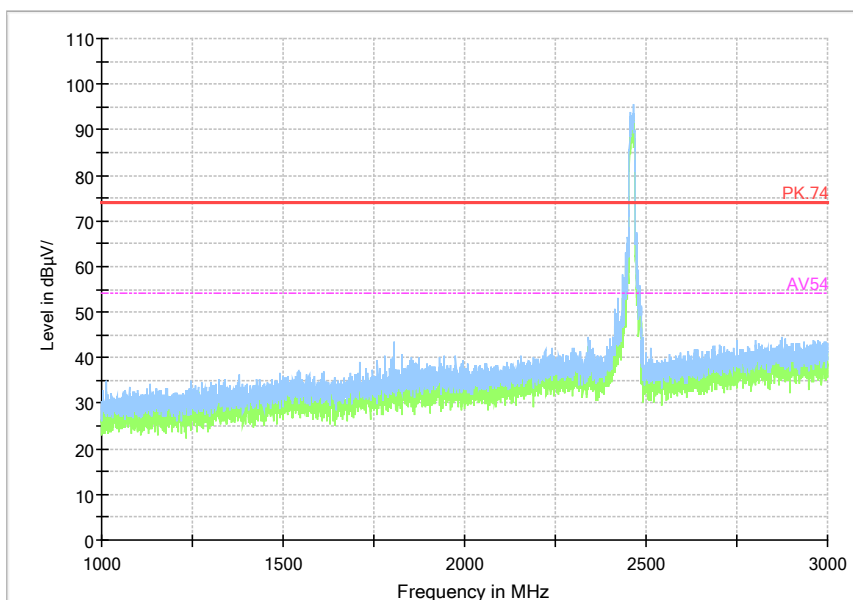


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11b

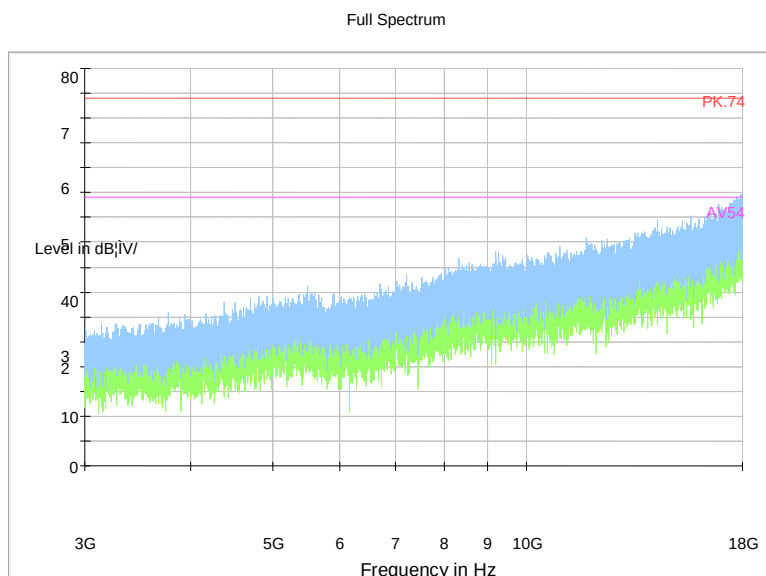


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

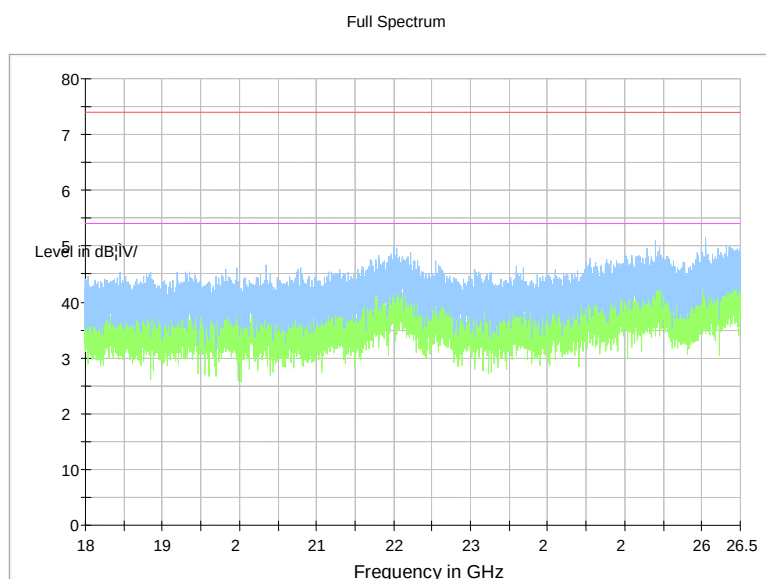


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

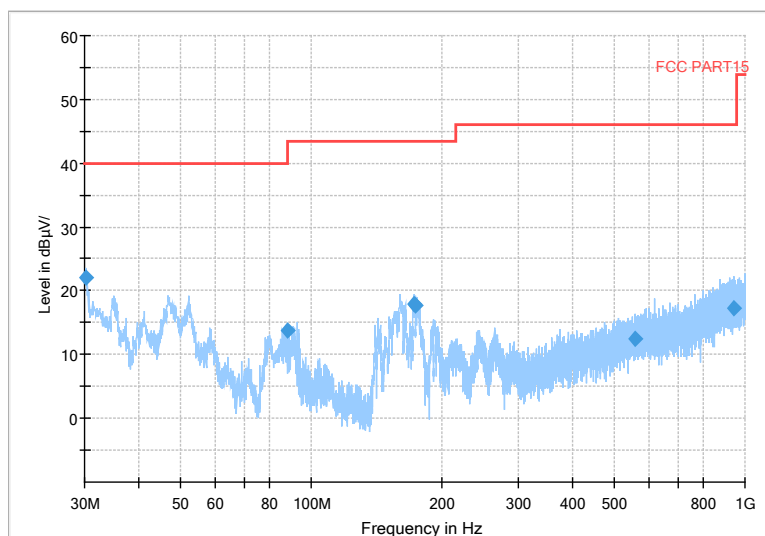


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g

Full Spectrum

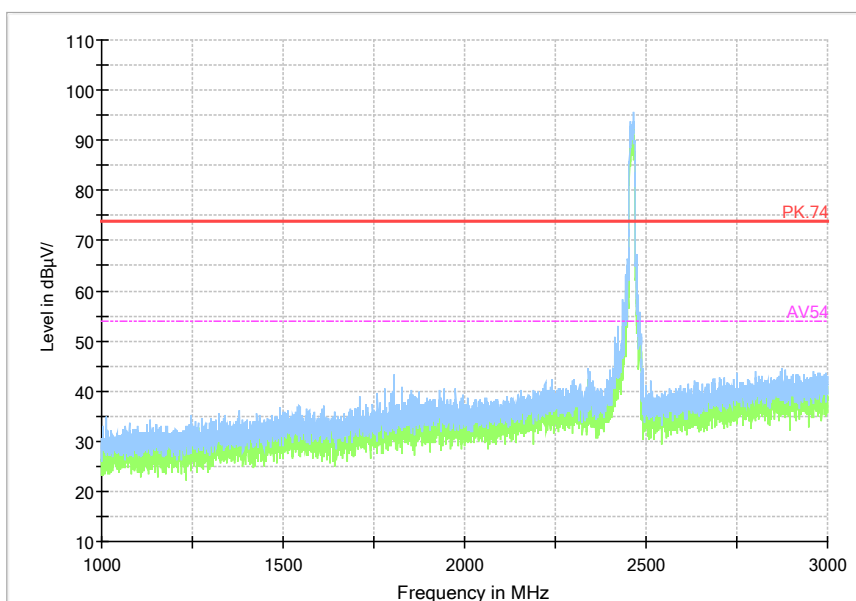


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

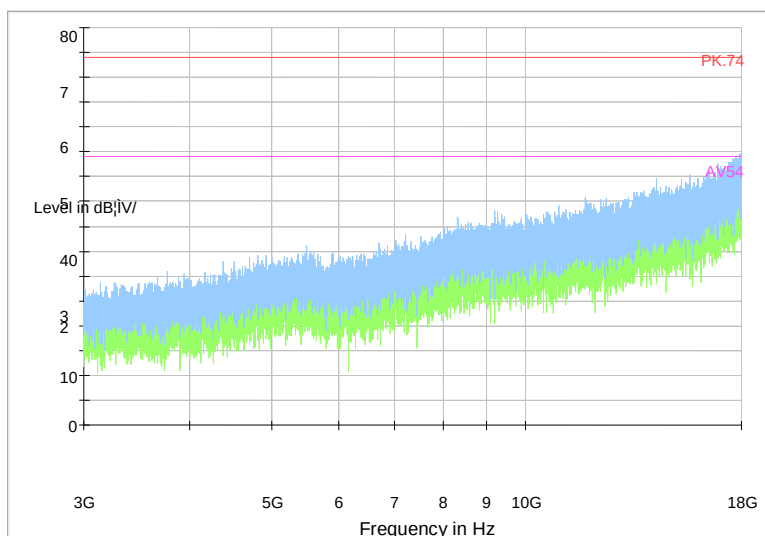


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

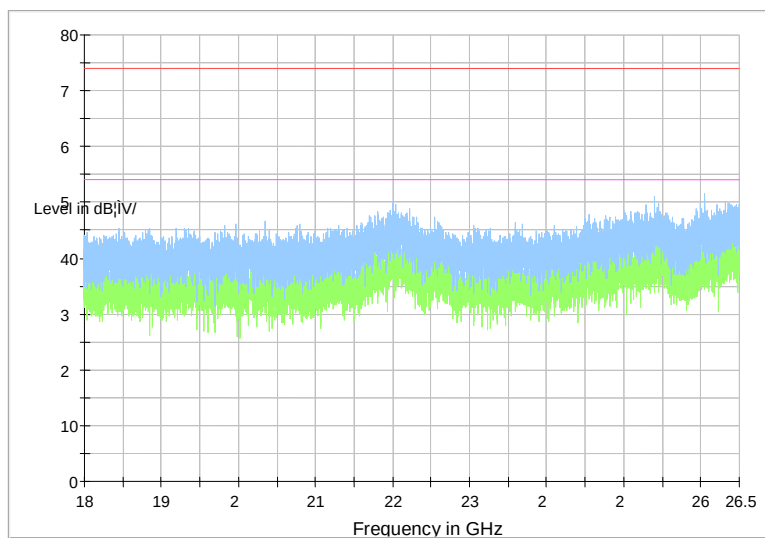


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

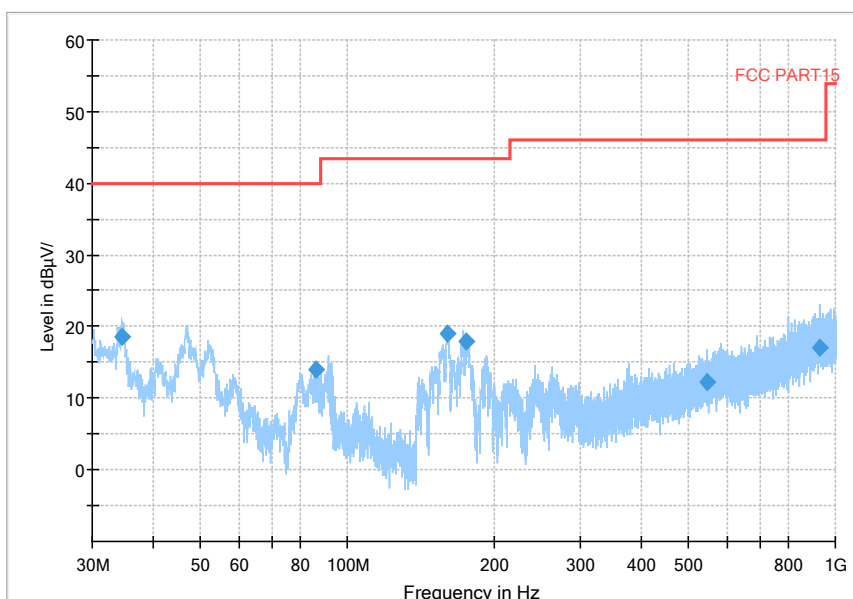


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

Full Spectrum

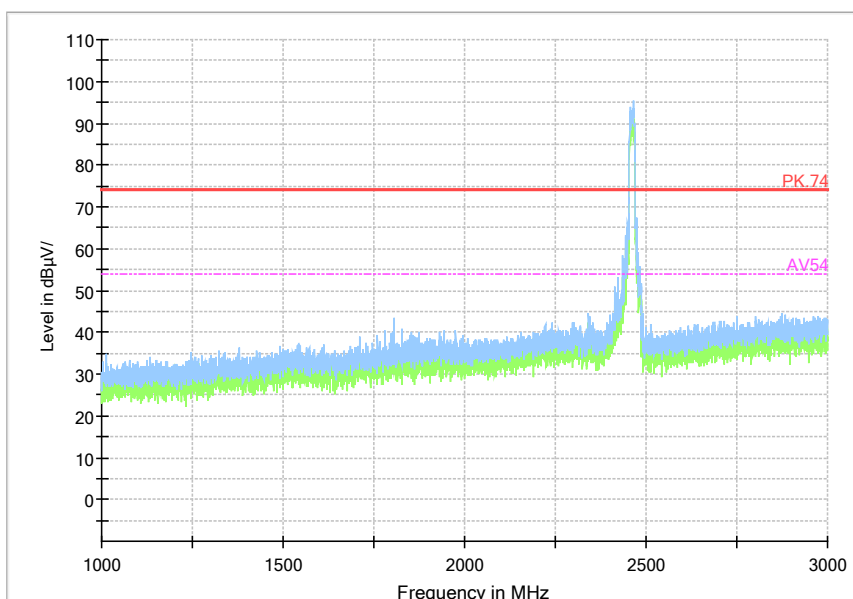


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

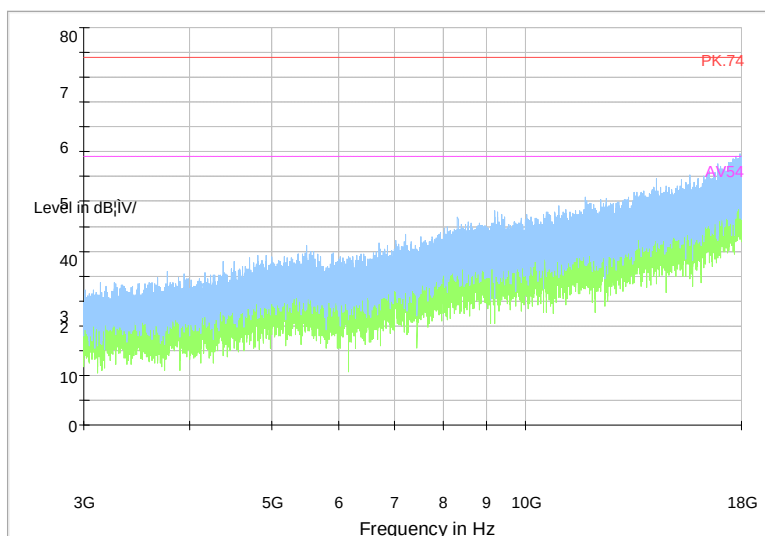


Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

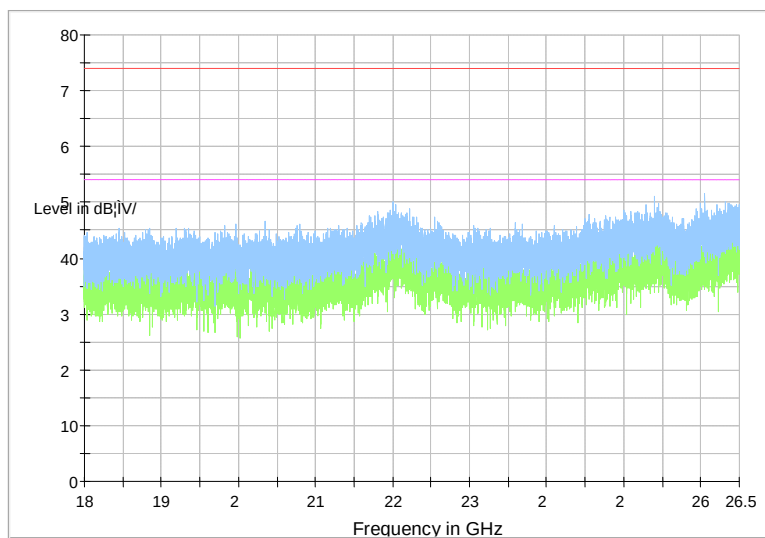


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2422
Channel No.:3

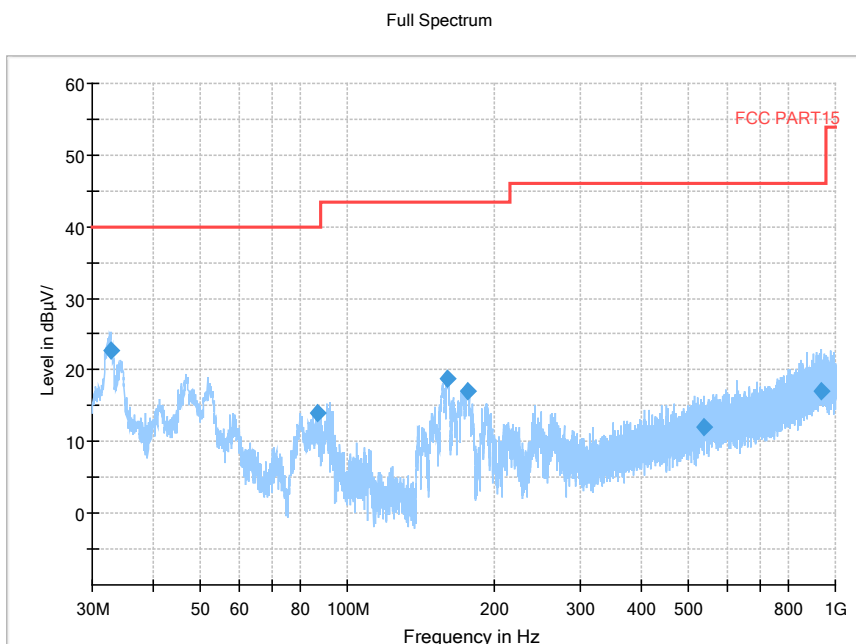

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)

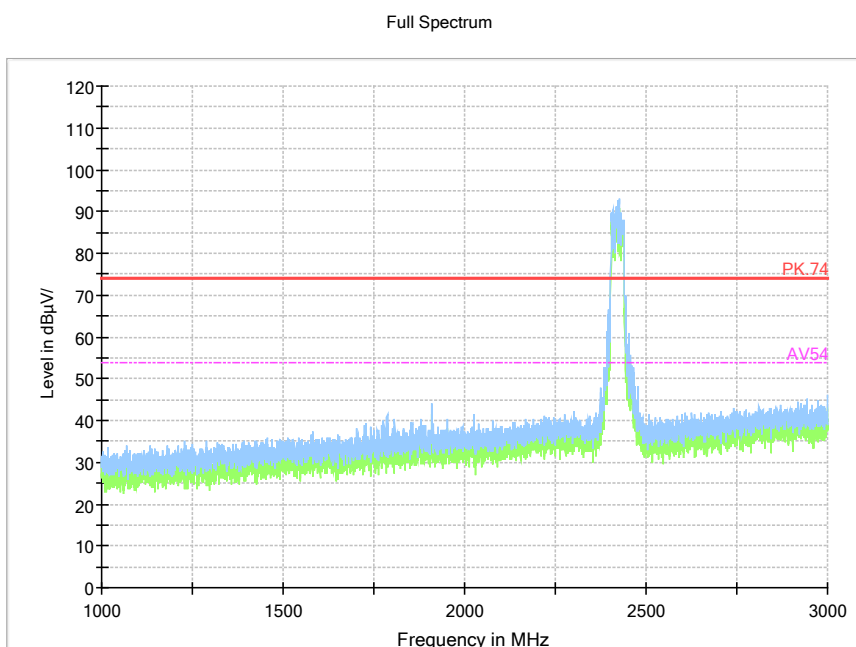

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)