REPORT No.: SZ14120093W01

FCC TEST REPORT

APPLICANT	:	ZTE Corporation
PRODUCT NAME	:	WCDMA Digital Mobile Handset
MODEL NAME	:	ZTE C370/Blade L2 Plus
TRADE NAME	:	ZTE
BRAND NAME	:	ZTE
FCC ID	:	SRQ-C370
STANDARD(S)	:	47 CFR Part 22 Subpart H 47 CFR Part 24 Subpart E
ISSUE DATE	:	2014-12-25

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.com E-mail: service@morlab.cn

TABLE OF CONTENTS

1. GENERAL INFORMATION 4

1.1 EUT DESCRIPTION 4
1.2 TEST STANDARDS AND RESULTS 6
1.3 FACILITIES AND ACCREDITATIONS 7

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS 8

2.1 CONDUCTED RF OUTPUT POWER 8
2.2 PEAK TO AVERAGE RADIO 20
2.3 99% OCCUPIED BANDWIDTH 26
2.4 FREQUENCY STABILITY 49
2.5 CONDUCTED OUT OF BAND EMISSIONS 56
2.6 BAND EDGE 94
2.7 TRANSMITTER RADIATED POWER (EIRP/ERP) 107
2.8 RADIATED OUT OF BAND EMISSIONS 118

Change History		
Issue	Date	Reason for change
1.0	Dec 25, 2014	First edition

Test Report Declaration

Applicant ZTE	Corporation
Applicant Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,Nanshan District,Shenzhen,Guangdong,P.R.China
Manufacturer ZTE	Corporation
Manufacturer Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,Nanshan District,Shenzhen,Guangdong,P.R.C
Product Name	WCDMA Digital Mobile Handset
Model Name	ZTE C370/Blade L2 Plus
Brand Name	ZTE
HW Version	V1AMB_A
SW Version	C370_MXlusacell_1.00
Test Standards	47 CFR Part 22 Subpart H 47 CFR Part 24 Subpart E
Test Date	2014-12-15 to 2014-12-25
Test Result	PASS

Tested by : Liu Zhisen

Reviewed by : Peng Huarui

Approved by : Zeng Dexin

1. GENERAL INFORMATION

1.1 EUT Description

Frequency Range ..... :	GSM 850MHz: Tx: 824.20 - 848.80MHz (at intervals of 200kHz); Rx: 869.20 - 893.80MHz (at intervals of 200kHz) GSM 1900MHz: Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz); Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz) WCDMA 850MHz Tx: 826.4 - 846.6MHz (at intervals of 200kHz); Rx: 871.4 - 891.6MHz (at intervals of 200kHz) WCDMA 1900MHz Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz); Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz)
Modulation Type..... :	GSM,GPRS Mode with GMSK Modulation EDGE Mode with 8PSK Modulation WCDMA Mode with QPSK Modulation HSDPA Mode with QPSK Modulation HSUPA Mode with QPSK Modulation HSPA+ Mode with QPSK Modulation
Multislot Class..... :	GPRS: Multislot Class 12,EGPRS: Multislot Class 12
Antenna Type..... :	PIFA Antenna
Emission Designators ..... :	GSM 850:253KGXW,GSM 1900:247KGXW EGPRS850:251KG7W, EGPRS1900:251KG7W, WCDMA 850:4M17F9W ,WCDMA1900:4M17F9W

Note 1: The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula F(n)=824.2+0.2*(n-128), 128<=n<=251; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula F(n)=1850.2+0.2*(n-512), 512<=n<=810; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula F(n)=826.4+0.2*(n-4132), 4132<=n<=4233; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4175(835MHz) and 4233 (846.6MHz).

Note 4: The transmitter (Tx) frequency arrangement of the WCDMA 1900MHz band used by the EUT can

be represented with the formula F(n)=1852.4+0.2*(n-9262), 9262<=n<=9538; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

Note 5: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-13 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-13 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-13 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2.	24.232(d)	Peak to average radio	PASS
2	2.1049,22.917 24.238	99% Occupied Bandwidth	PASS
3	2.1055,22.355 24.235	Frequency Stability	PASS
4	2.1051,2.1057 22.917,24.238,	Conducted Out of Band Emissions	PASS
5	2.1051,2.1057 22.917,24.238	Band Edge	PASS
6	22.913,24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
7	2.1053,2.1057 22.917,24.238	Radiated Out of Band Emissions	PASS

NOTE：Measurement method according to TIA/EIA 603.D-2010

1.3 Facilities and Accreditations

1.3.1 Facilities

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, No.8 LongChang Road,Block 67, BaoAn District, ShenZhen, GuangDong Province,P. R. China 518101. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 695796.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS

2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Test Description

1. Test Setup:

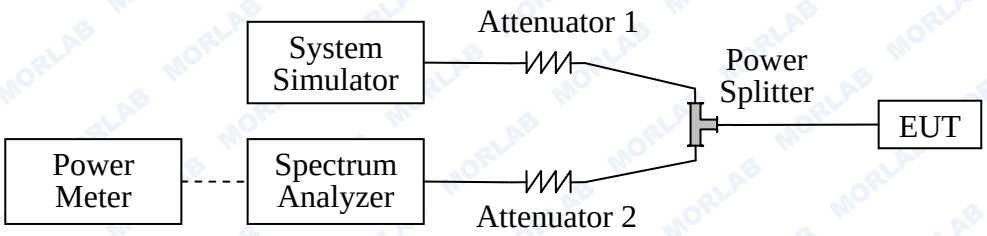

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

The Power Meter was just used for the Conducted RF Output Power test of WCDMA Model.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.02.26	2015.02.25
Power Meter	Agilent	E4418B	GB43318055	2014.02.26	2015.02.25
Power Sensor	Agilent	8482A	MY41091706	2014.02.26	2015.02.25
Power Splitter	Weinschel	1506A	NW521	2014.02.26	2015.02.25
Attenuator 1	Resnet	20dB	(n.a.)	2014.02.26	2015.02.25
Attenuator 2	Resnet	3dB	(n.a.)	2014.02.26	2015.02.25

2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

1. GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	Measured Output Power		Limit	Verdict
			dBm	Refer to Plot	dBm	
GSM 850MHz	128	824.2	32.73	Plot A1 to A3	35	PASS
	190	836.6	32.81			PASS
	251	848.8	32.72			PASS
GSM 1900MHz	512	1850.2	29.06	Plot B1 to B3	32	PASS
	661	1880.0	29.33			PASS
	810	1909.8	29.16			PASS
GPRS 850MHz	128	824.2	31.94	Plot C1 to C3Note 1	35	PASS
	190	836.6	31.99			PASS
	251	848.8	31.89			PASS
GPRS 1900MHz	512	1850.2	28.25	Plot D1 to D3Note 1	32	PASS
	661	1880.0	28.40			PASS
	810	1909.8	28.25			PASS
EGPRS 850MHz	128	824.2	31.91	Plot E1 to E3Note 1	35	PASS
	190	836.6	31.98			PASS
	251	848.8	31.92			PASS
EGPRS 1900MHz	512	1850.2	28.25	Plot F1 to F3Note 1	32	PASS
	661	1880.0	28.37			PASS
	810	1909.8	28.23			PASS

Note 1: For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.

2. WCDMA Model Test Verdict:

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	23.98	23.71	23.76	23.09	22.73	22.39
HSDPA	1	23.99	23.64	23.66	22.93	22.57	22.22
	2	23.97	23.62	23.64	22.94	22.56	22.20
	3	23.48	23.12	23.15	22.43	22.07	21.71
	4	23.49	23.13	23.16	22.44	22.06	21.72
HSUPA	1	24.02	23.68	23.62	23.24	22.68	22.34
	2	22.01	21.67	21.60	21.24	20.67	20.34
	3	23.02	22.68	22.61	22.23	21.68	21.35
	4	22.02	21.68	21.61	21.23	20.63	20.33
	5	24.01	23.69	23.60	23.25	22.68	22.33
HSPA+	1	23.92	23.67	23.65	23.03	22.75	22.34
Note:	The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA /HSPA+ was tested by power meter.						

3. GSM Model Test Plots:

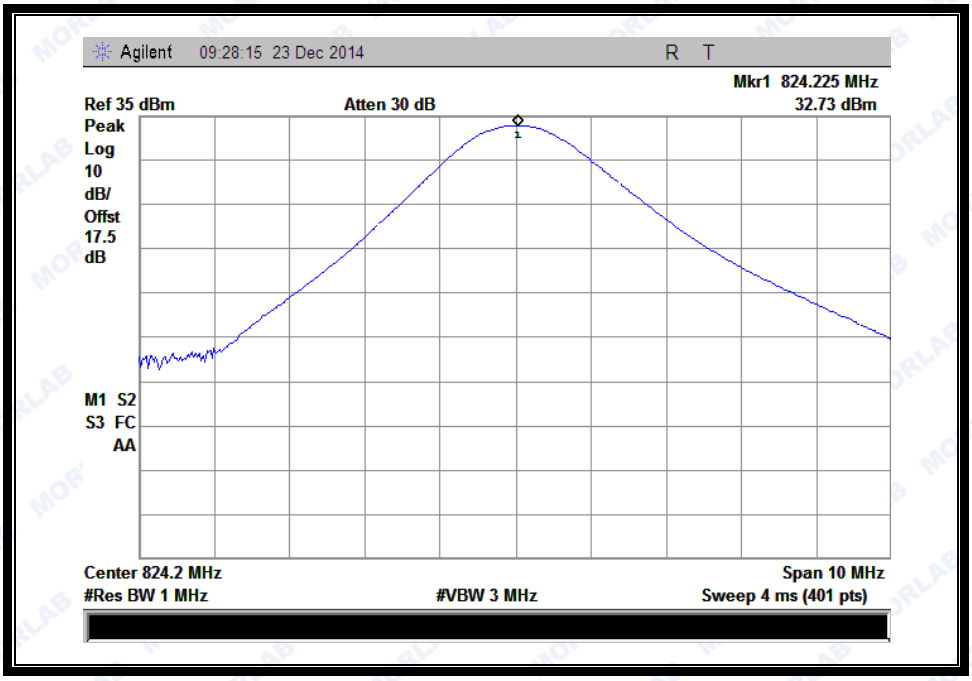

(Plot A1:GSM 850MHz Channel = 128)

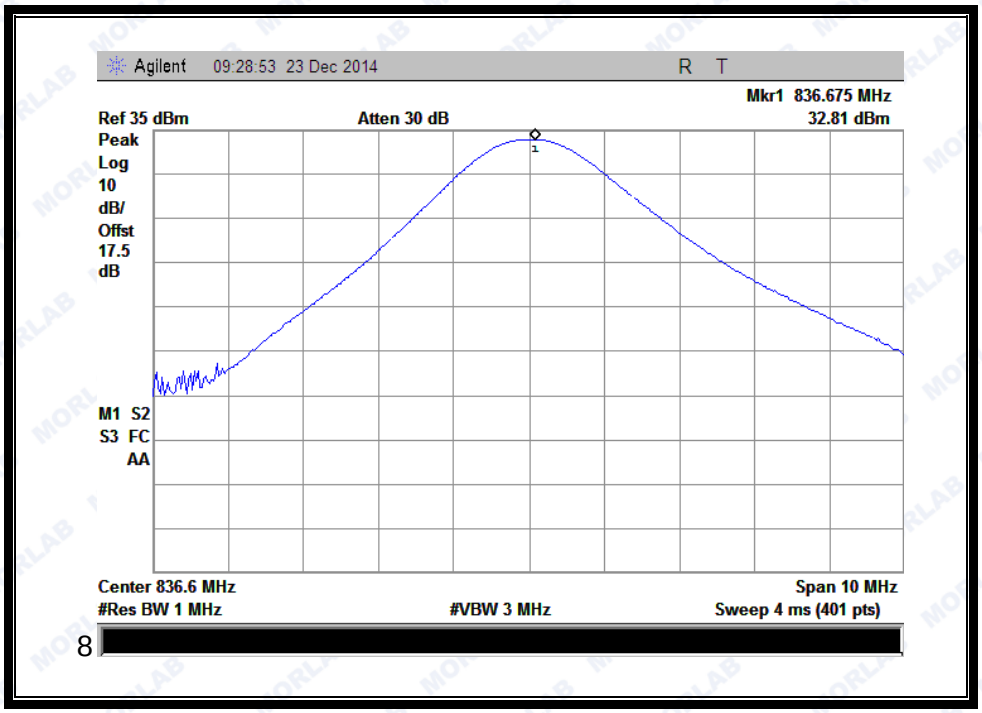

(Plot A2:GSM 850MHz Channel = 190)

MORLAB GROUP
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
Tel: 86-755-36698555 Http://www.morlab.com
Fax: 86-755-36698525 E-mail: service@morlab.cn

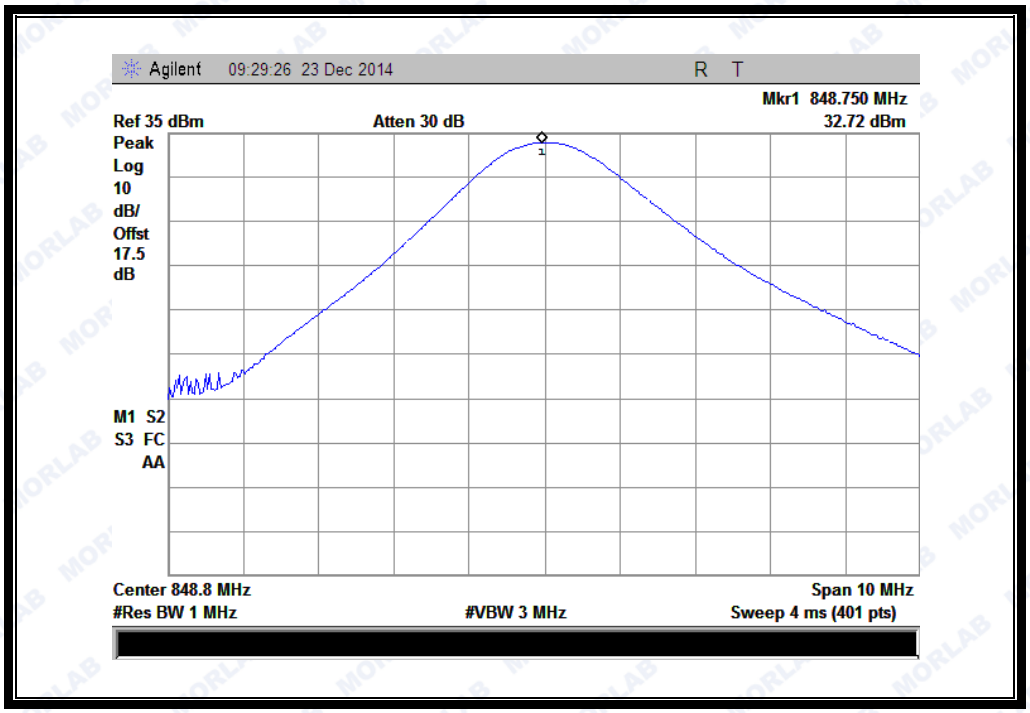

(Plot A3:GSM 850MHz Channel = 251)

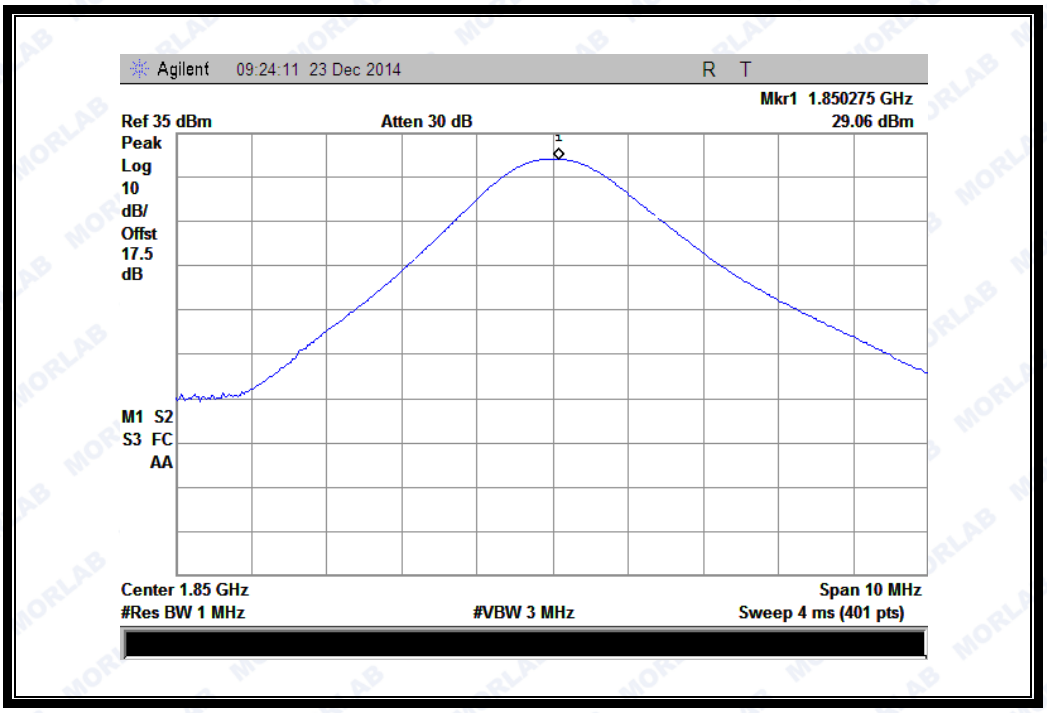

(Plot B1: GSM 1900MHz Channel = 512)

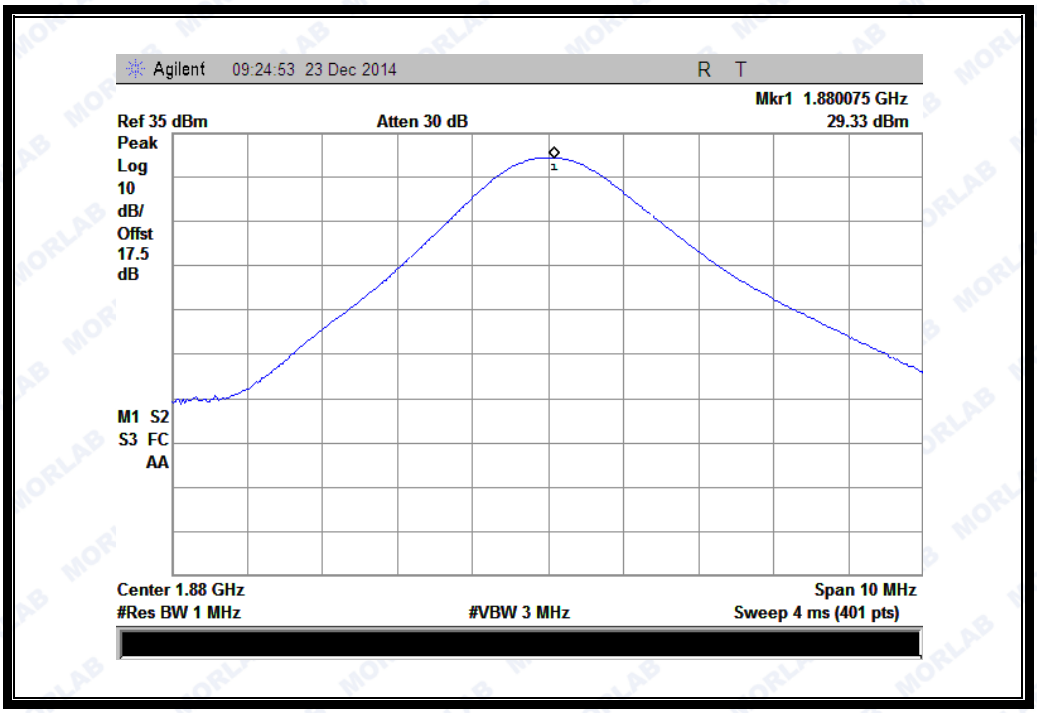

(Plot B2: GSM 1900MHz Channel = 661)

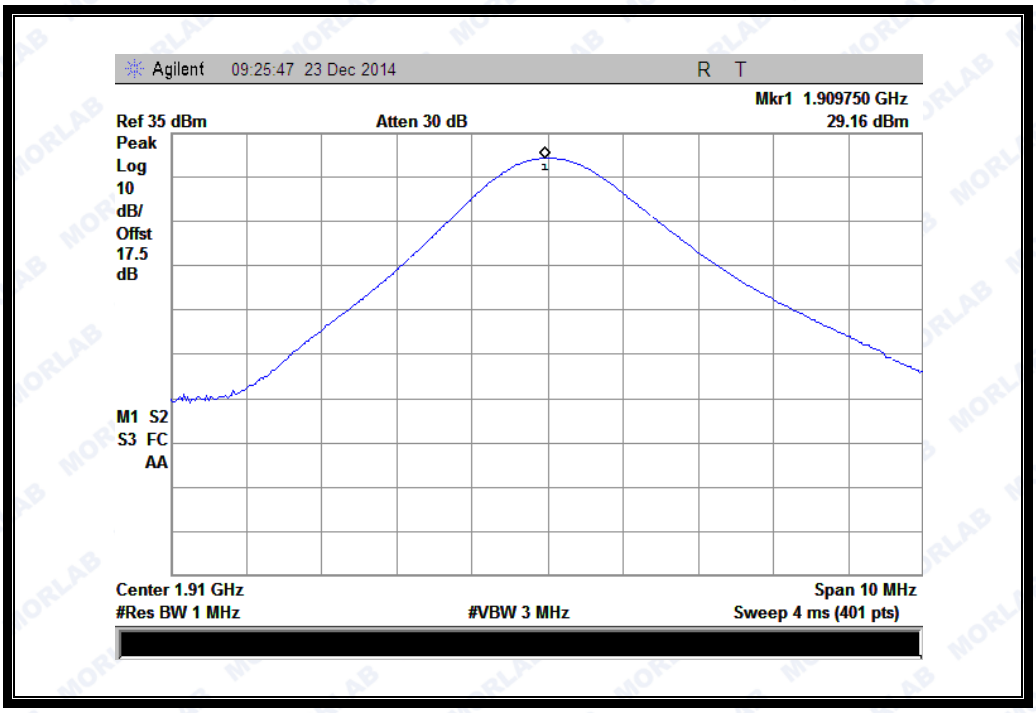

(Plot B3: GSM 1900Hz Channel = 810)

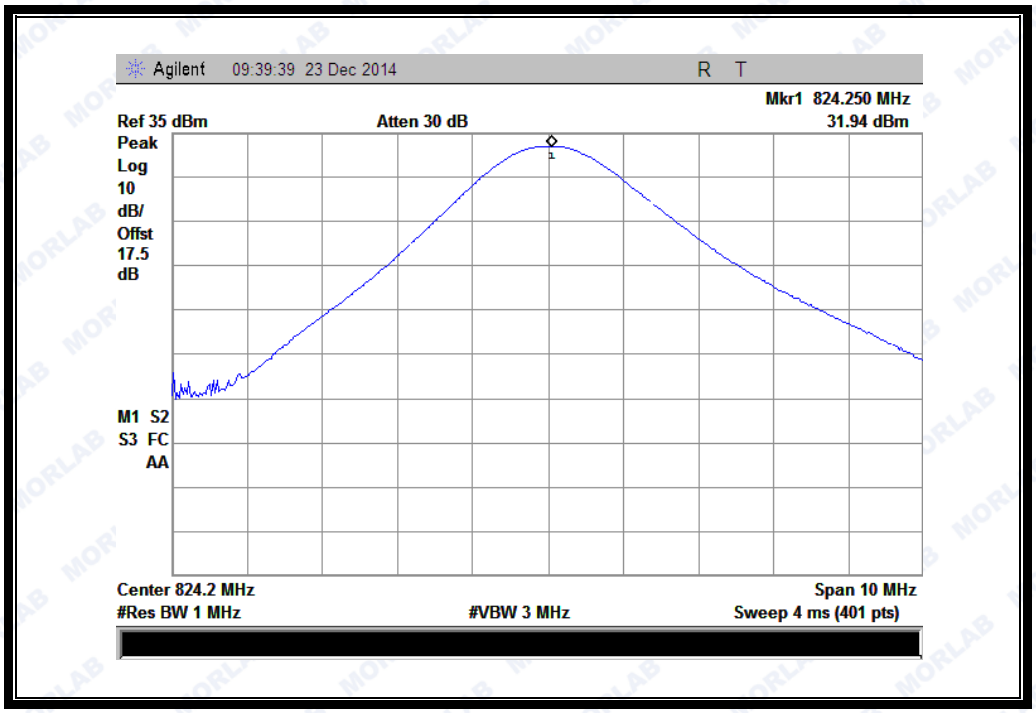

(Plot C 1: GPRS 850MHz Channel = 128)

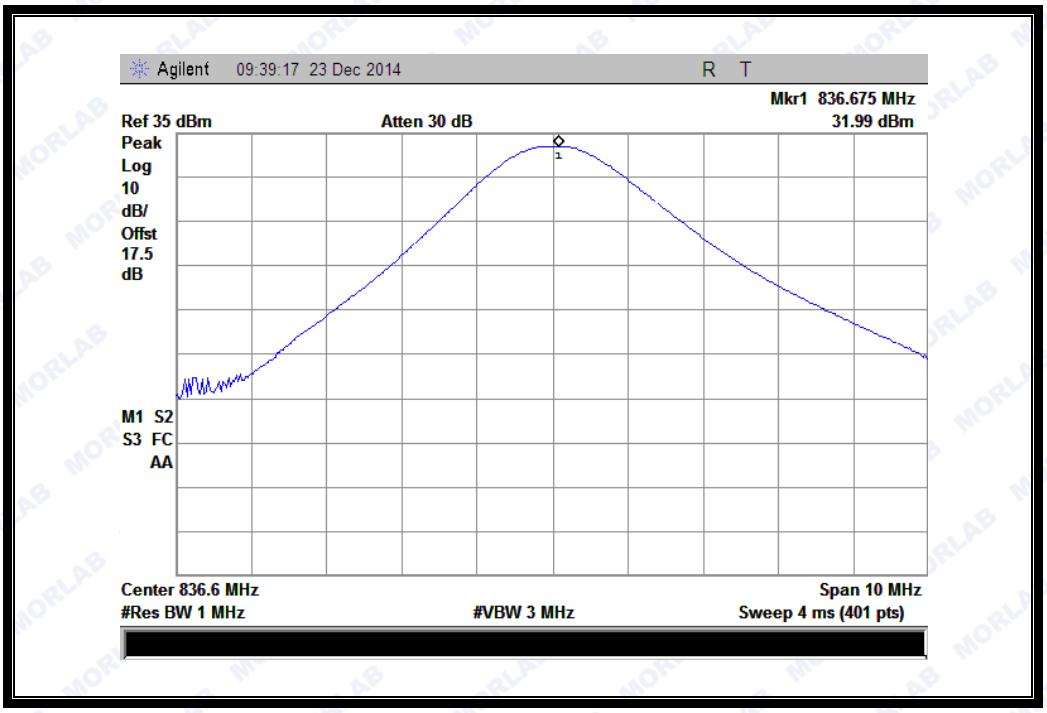

(Plot C 2: GPRS 850MHz Channel = 190)

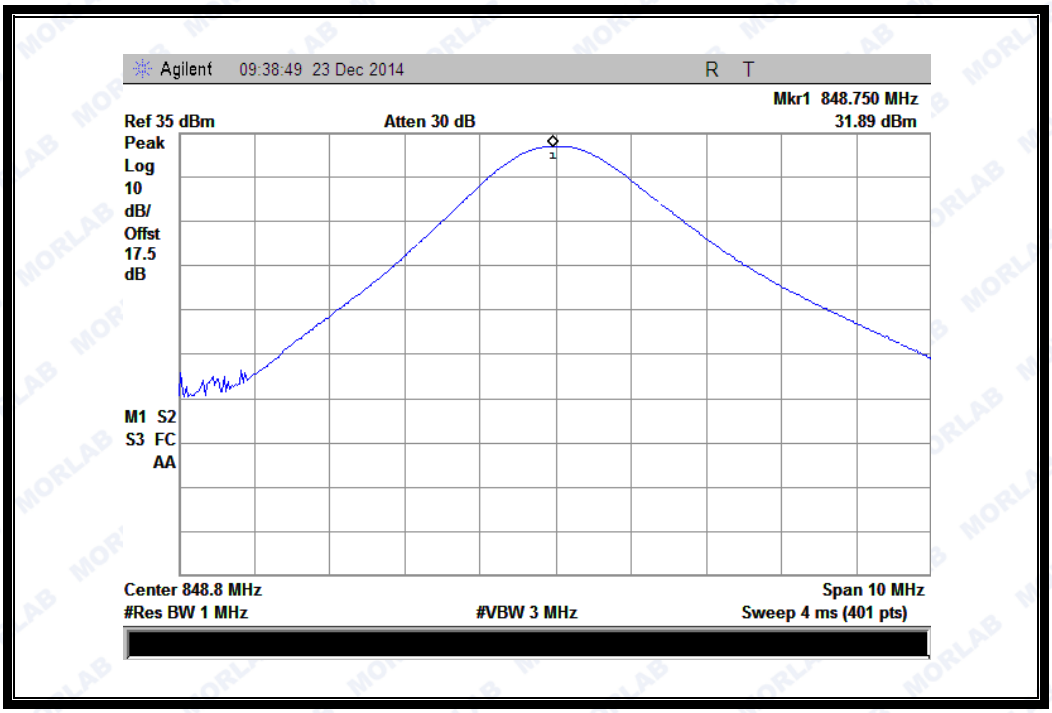

(Plot C 3: GPRS 850MHz Channel = 251)

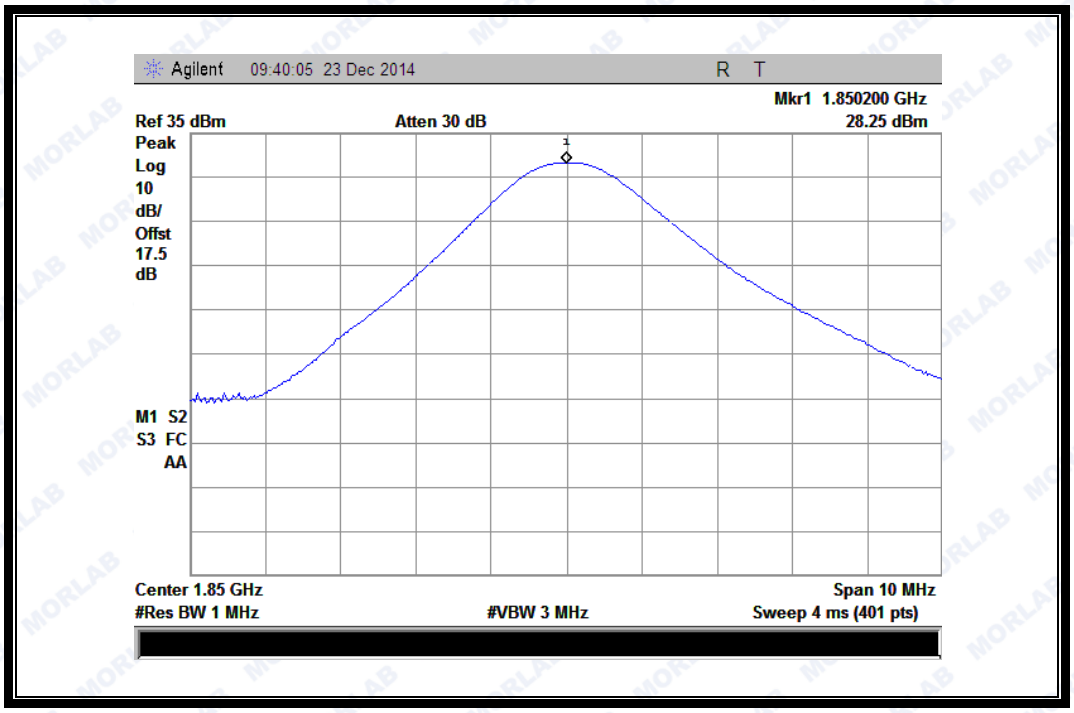

(Plot D 1: GPRS 1900MHz Channel = 512)

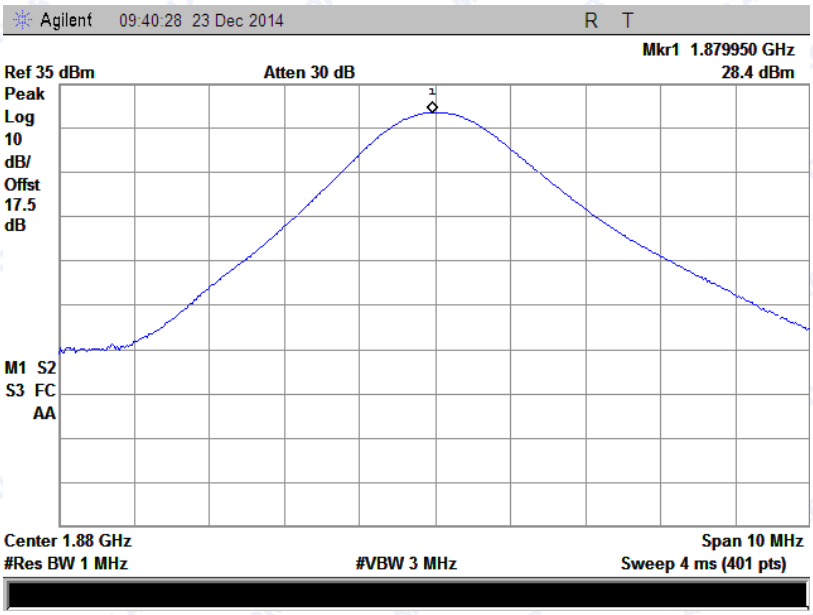

(Plot D 2: GPRS 1900MHz Channel = 661)

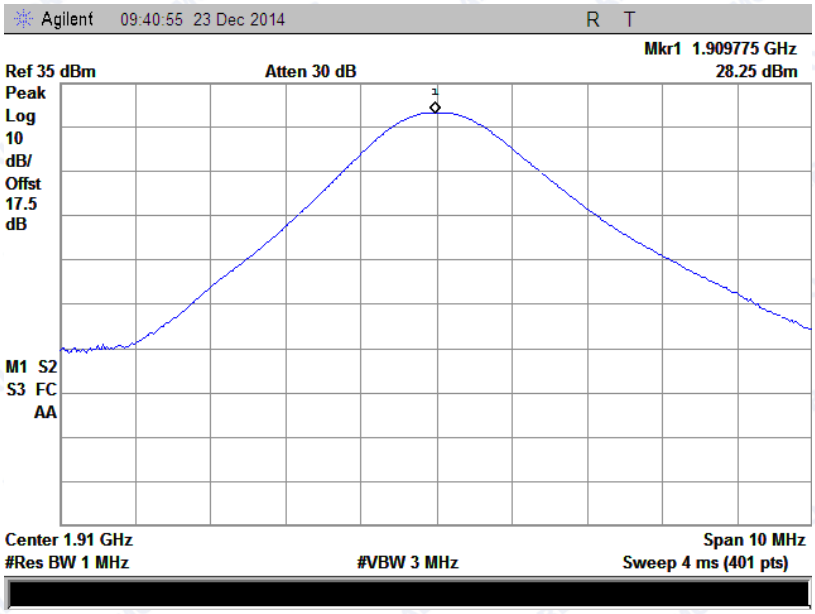

(Plot D 3: GPRS 1900MHz Channel = 810)

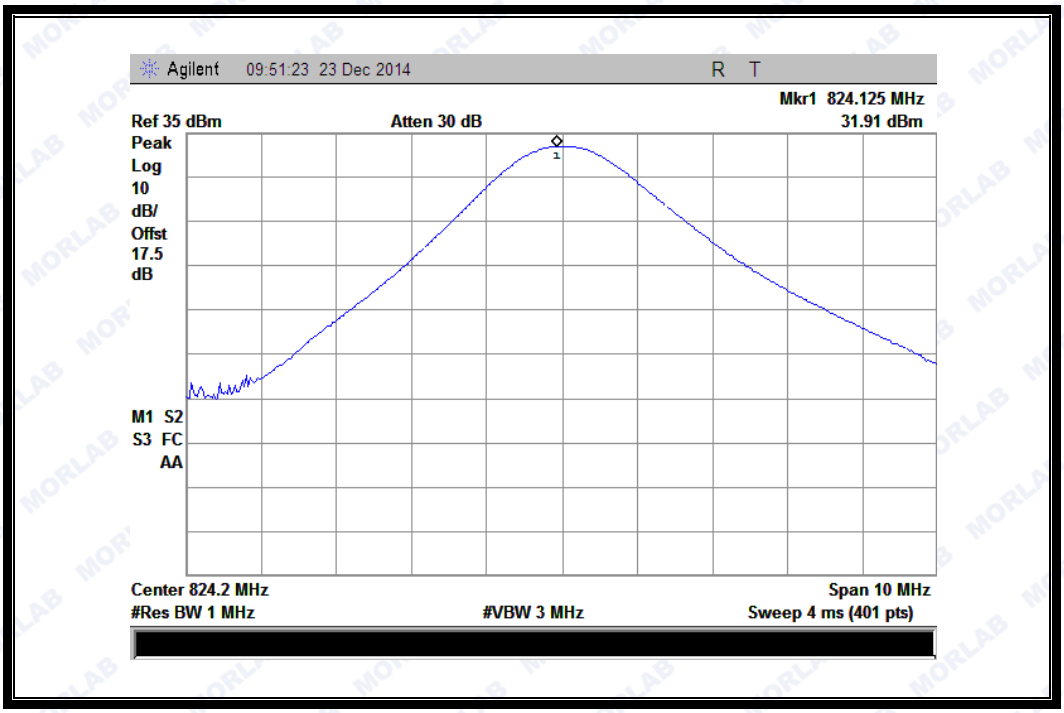

(Plot E1: EGPRS 850MHz Channel = 128)

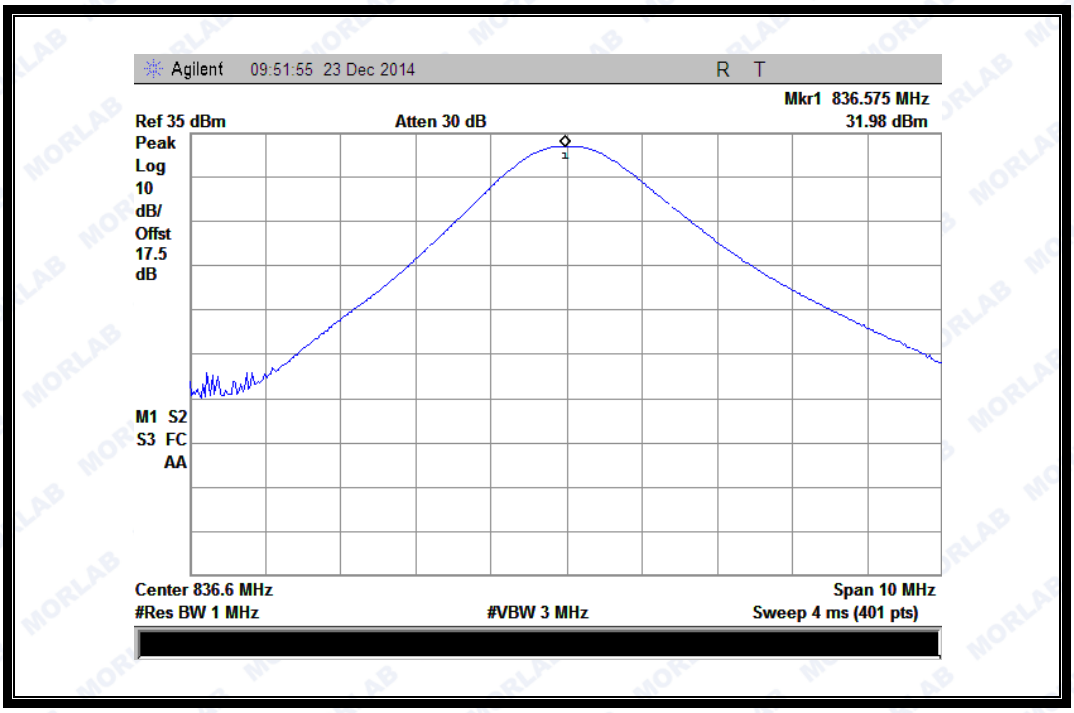

(Plot E2: EGPRS 850MHz Channel = 190)

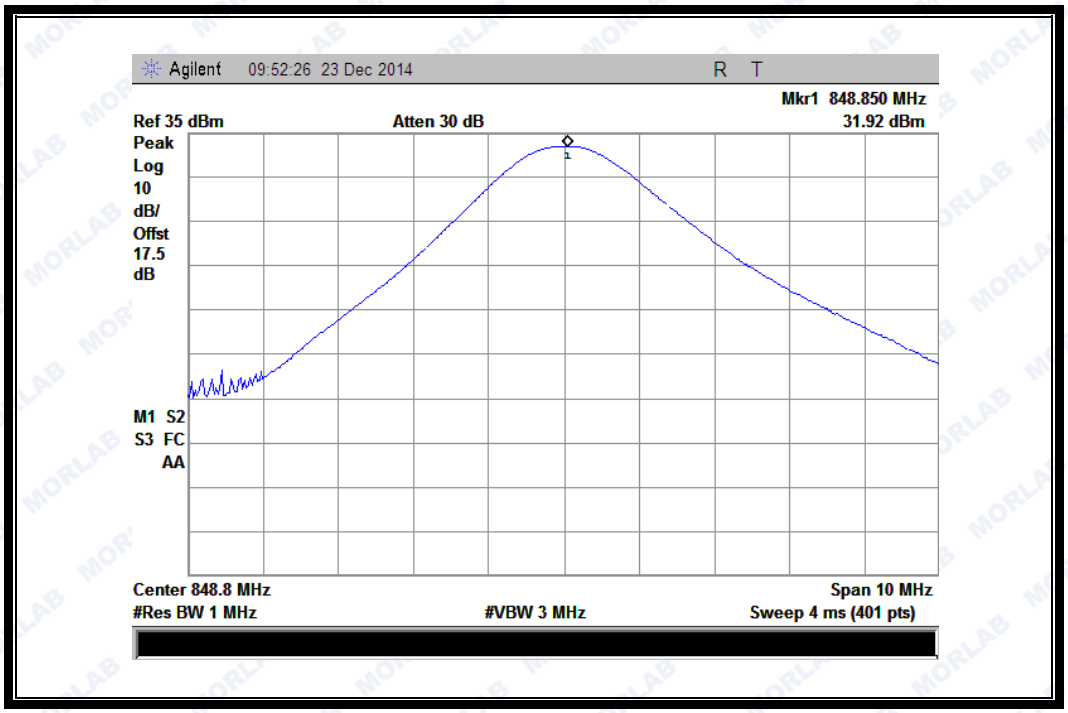

(Plot E3: EGPRS 850MHz Channel = 251)

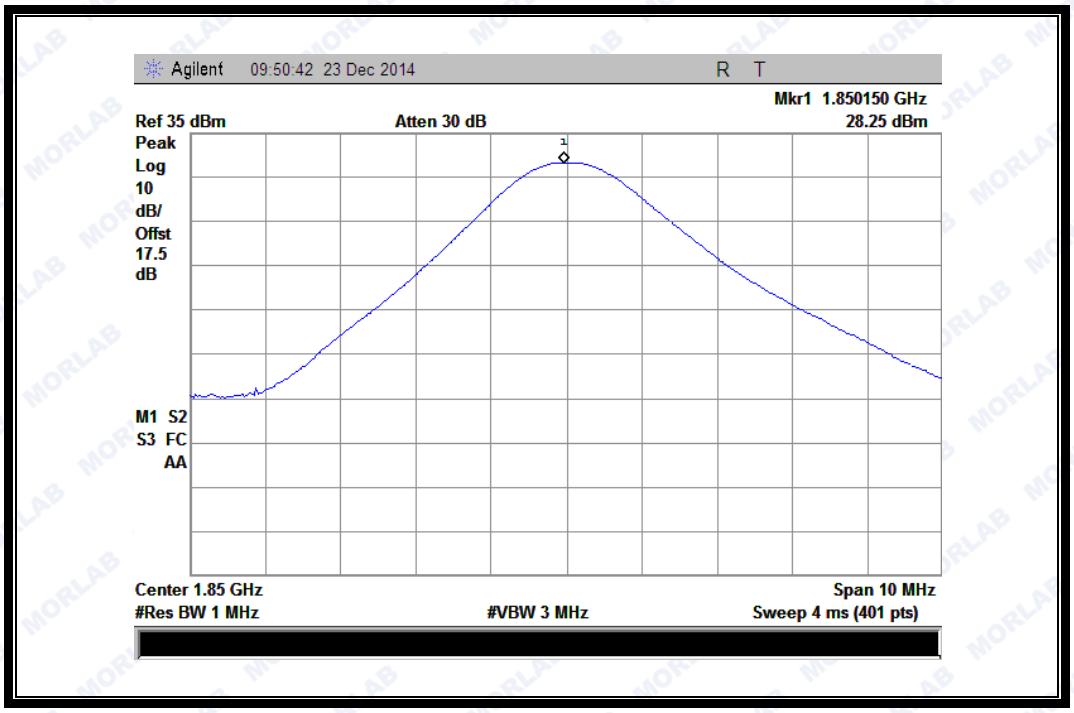

(Plot F1:EGPRS 1900MHz Channel = 512)

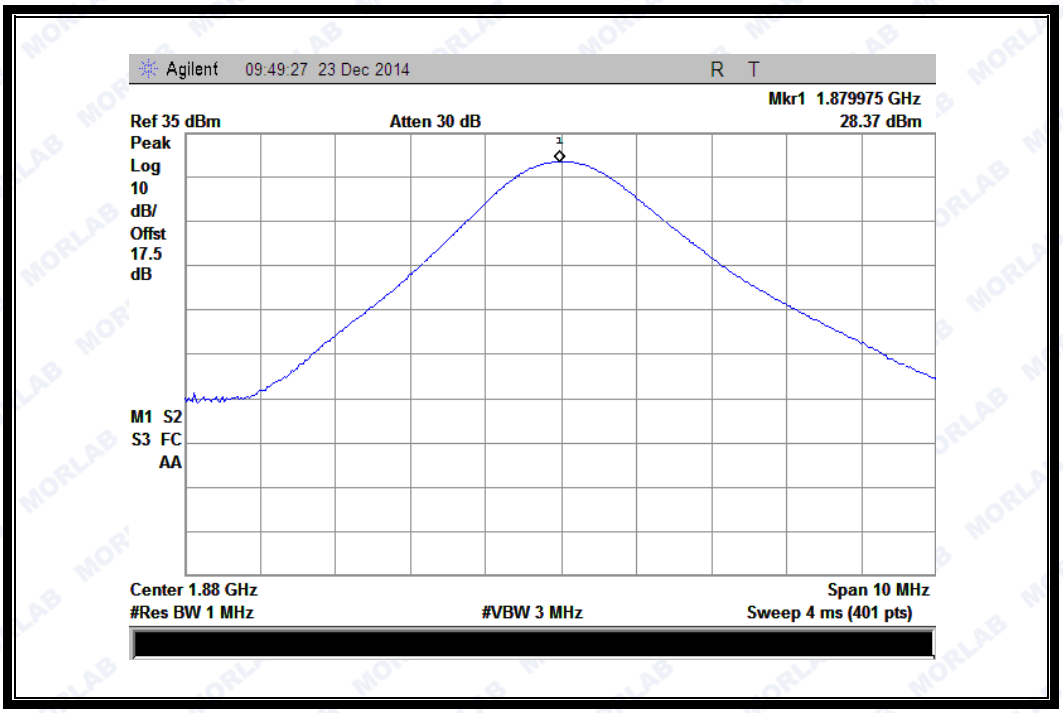

(Plot F2:EGPRS 1900MHz Channel = 661)

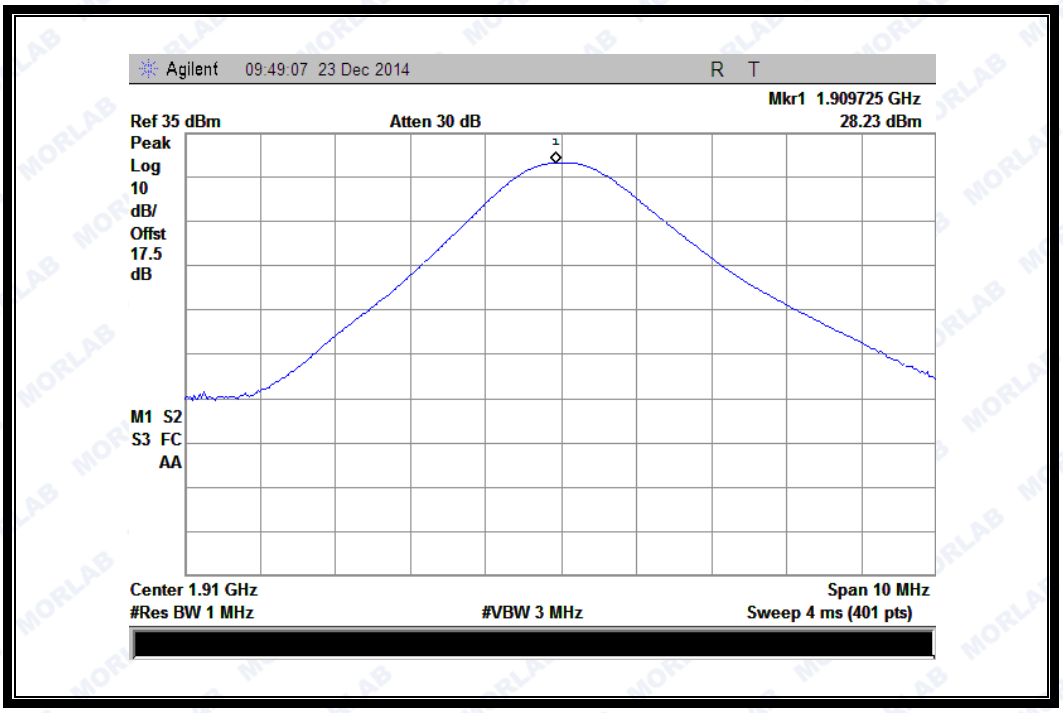

(Plot F3:EGPRS 1900Hz Channel = 810)

2.2 Peak to Average Radio

2.2.1 Definition

According to FCC section 2.1049 and FCC 24.232(d) the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A .For GSM/EGPRS operating mode:

a. Set RBW=1MHz, VBW=1MHz, peak detector in spectrum analyzer.

b. Set EUT in maximum output power, and triggered the bust signal.

c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average radio.

B. For UMTS operating mode:

a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.

b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.

1. Test Verdict:

Band	Channel	Frequency (MHz)	Peak to Average radio		Limit	Verdict
			dBm	Refer to Plot	dBm	
GSM 1900MHz	512	1850.2	0.01	Plot A1 to A3	13	PASS
	661	1880.0	0.03			PASS
	810	1909.8	0.02			PASS
EGPRS 1900MHz	512	1850.2	0.05	Plot B1 to B3	13	PASS
	661	1880.0	0.02			PASS
	810	1909.8	0.01			PASS
WCDMA 1900MHz	9262	1852.4	2.72	Plot C1 toC3	13	PASS
	9400	1880	2.47			PASS
	9538	1907.6	2.36			PASS

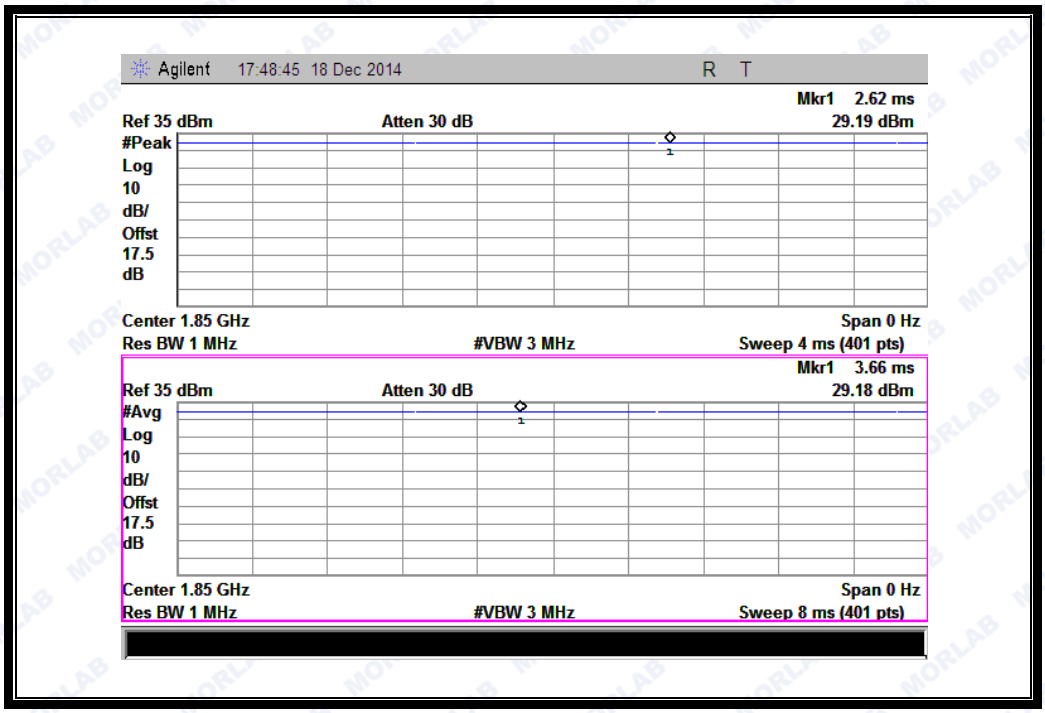

(Plot A1:GSM 1900 MHz Channel = 512)

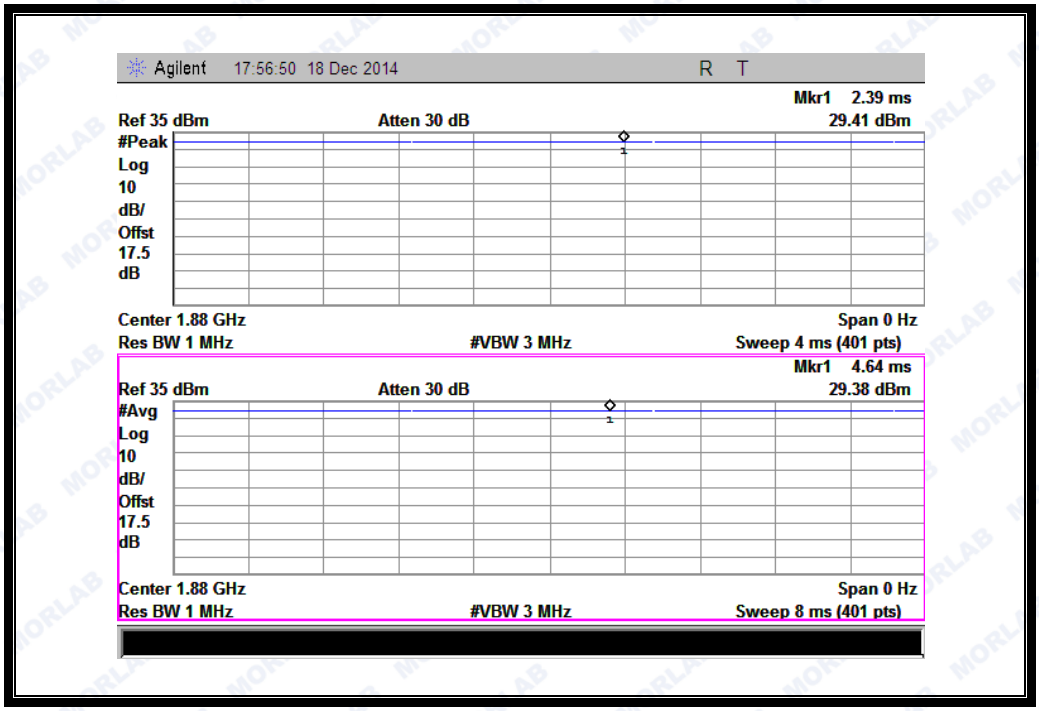

(Plot A2:GSM 1900 MHz Channel = 661)

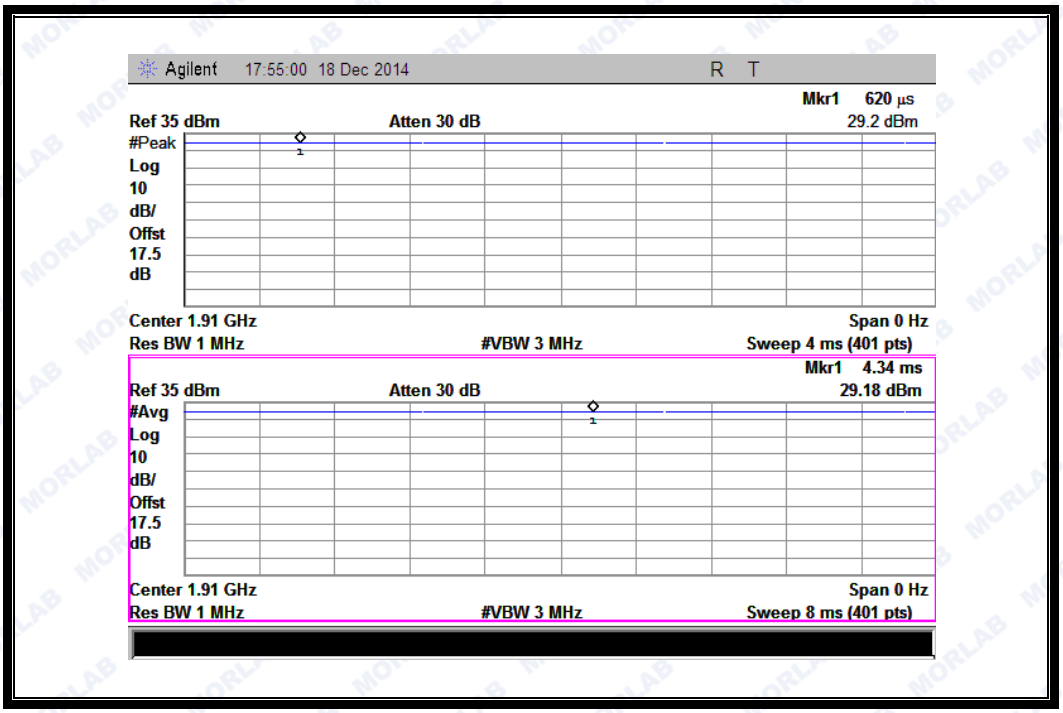

(Plot A3:GSM 1900MHz Channel = 810)

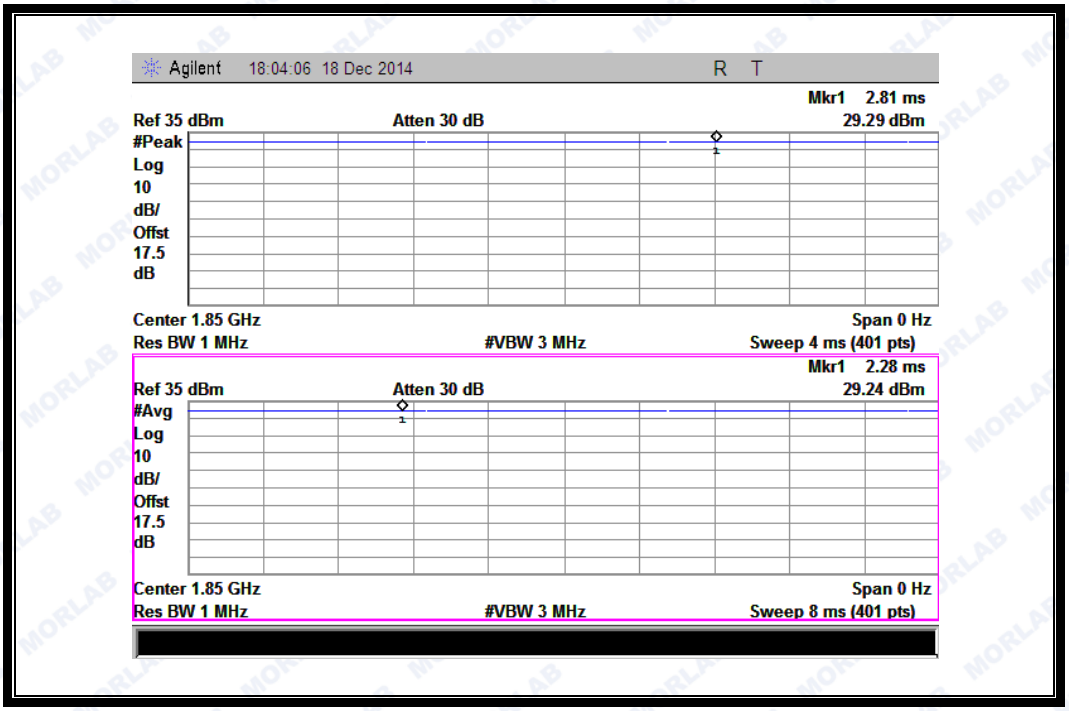

(Plot B1: EGPRS 1900MHz Channel = 512)

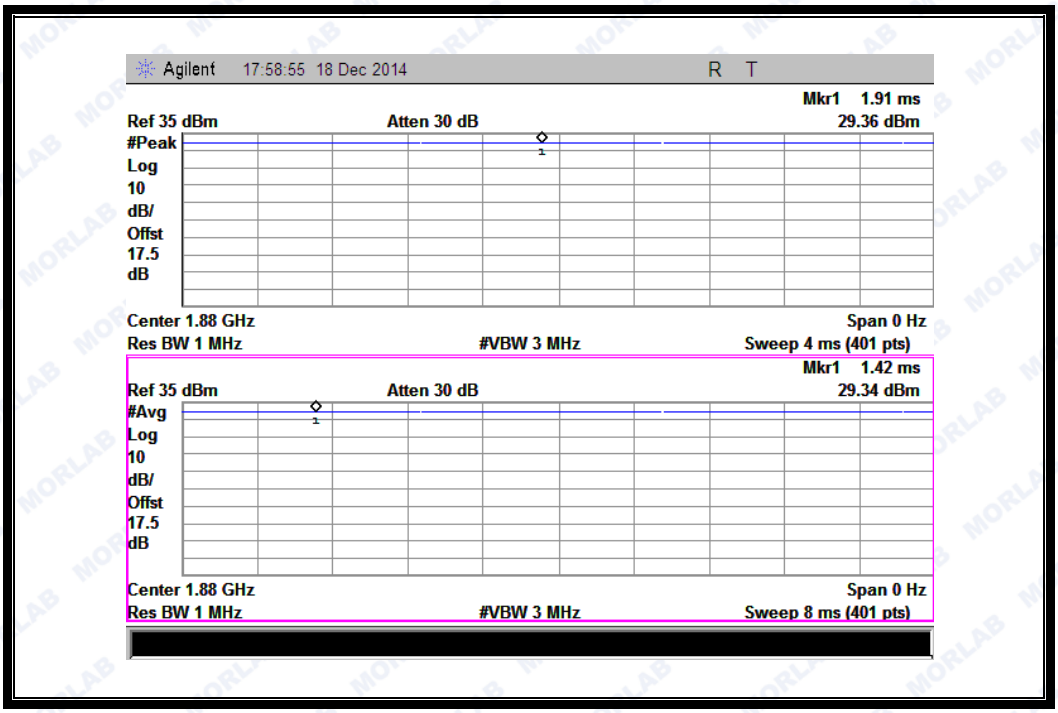

(Plot B2: EGPRS 1900MHz Channel = 661)

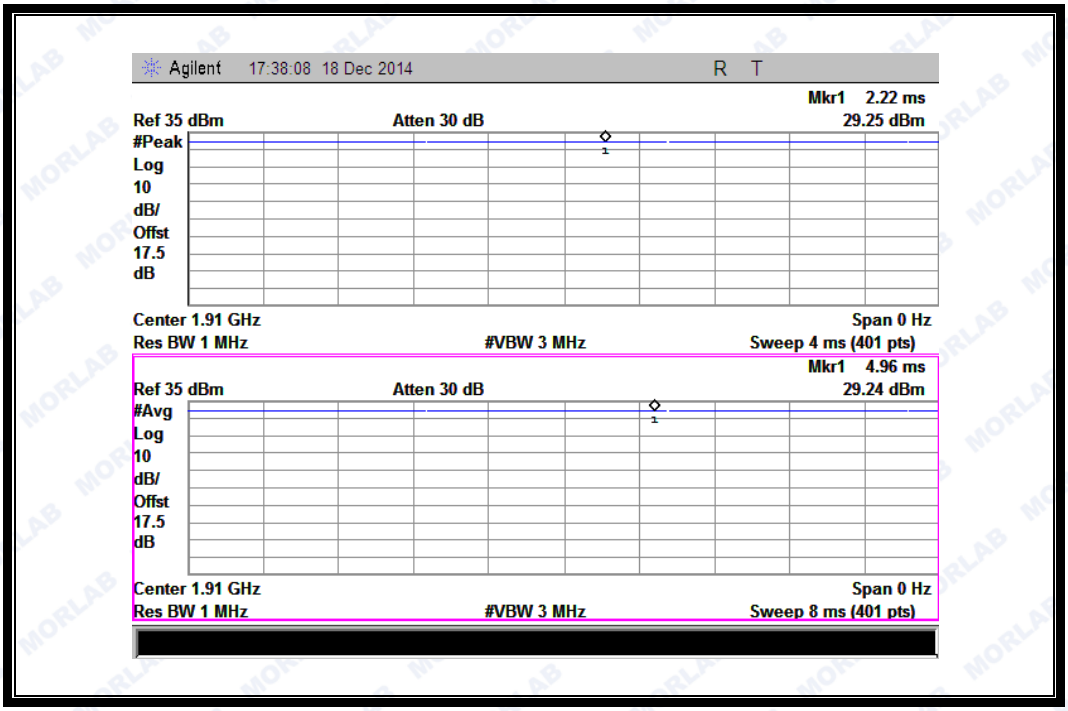

(Plot B3: EGPRS 1900MHz Channel = 810)

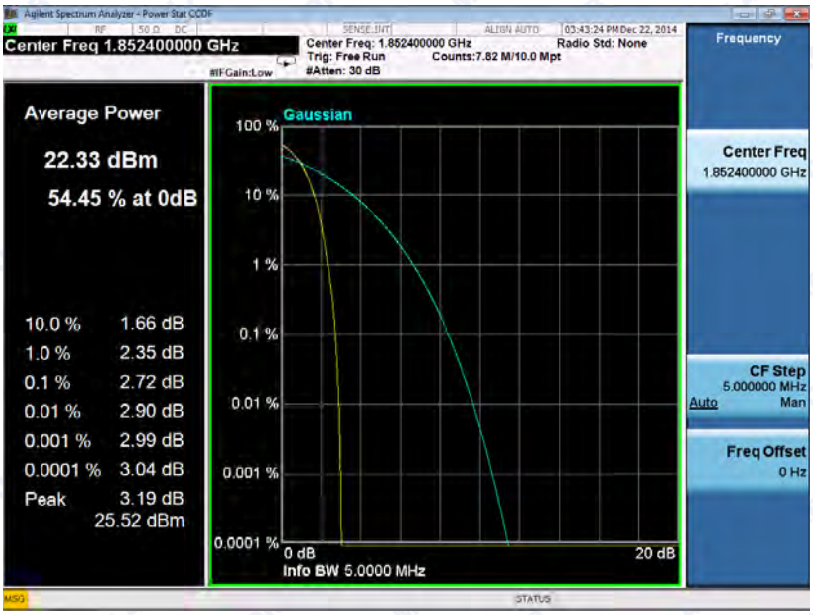

(Plot C1: WCDMA 1900MHz Channel = 9262)

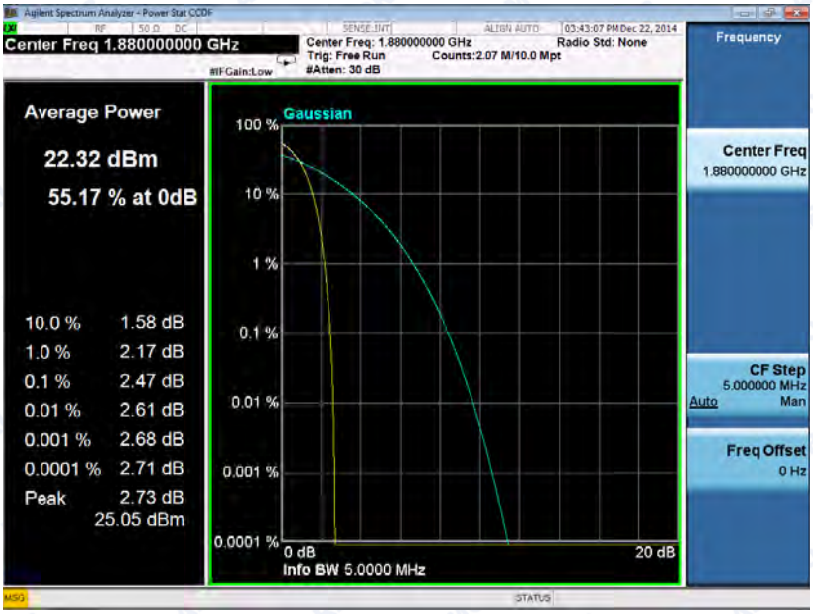

(Plot C2: WCDMA 1900MHz Channel = 9400)

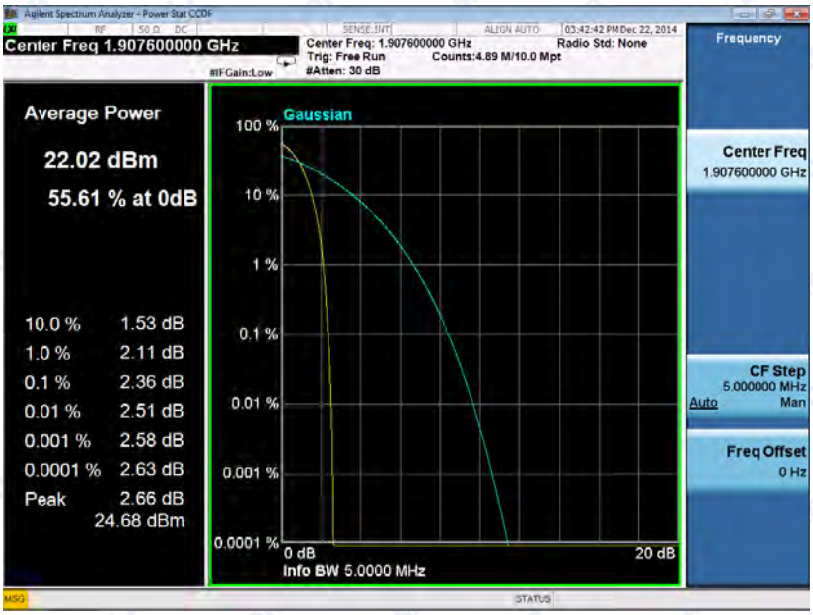

(Plot C3: WCDMA 1900MHz Channel = 9538)

2.3 99% Occupied Bandwidth

2.3.1 Definition

According to FCC section 2.1049 and FCC § 22.917 &24.238 the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.

2. Test Verdict:

Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
EDGE 850MHz	128	824.2	322.993 KHz	247.6225 KHz	Plot A
	190	836.6	317.814 KHz	244.8389 KHz	Plot B
	251	848.8	320.192 KHz	250.9248 KHz	Plot C
EDGE 1900MHz	512	1850.2	318.976 KHz	246.5750 KHz	Plot D
	661	1880.0	320.296 KHz	251.4504 KHz	Plot E
	810	1909.8	318.736 KHz	247.8818 KHz	Plot F
WCDMA 850MHz	4132	826.4	4.653 MHz	4.1517 MHz	Plot G
	4175	835	4.678 MHz	4.1512 MHz	Plot H
	4233	846.6	4.655 MHz	4.1476 MHz	Plot I
WCDMA 1900MHz	9262	1852.4	4.644 MHz	4.1585 MHz	Plot J
	9400	1880	4.677 MHz	4.1720 MHz	Plot K
	9538	1907.6	4.657 MHz	4.1551 MHz	Plot L
HSDPA 850MHz	4132	826.4	4.633 MHz	4.1681 MHz	Plot M
	4175	835	4.665 MHz	4.1462 MHz	Plot N
	4233	846.6	4.652 MHz	4.1452 MHz	Plot O
HSDPA 1900MHz	9262	1852.4	4.648 MHz	4.1555 MHz	Plot P
	9400	1880	4.670 MHz	4.1606 MHz	Plot Q
	9538	1907.6	4.686 MHz	4.1600 MHz	Plot R
HSUPA 850MHz	4132	826.4	4.658 MHz	4.1541 MHz	Plot S
	4175	835	4.657 MHz	4.1663 MHz	Plot T
	4233	846.6	4.637 MHz	4.1598 MHz	Plot U
HSUPA 1900MHz	9262	1852.4	4.643 MHz	4.1527 MHz	Plot V

Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
	9400	1880	4.655 MHz	4.1576 MHz	Plot W
	9538	1907.6	4.671 MHz	4.1548 MHz	Plot X
HSPA+ 850MHz	4132	826.4	4.649 MHz	4.1629 MHz	Plot Y
	4175	835	4.646 MHz	4.1542 MHz	Plot Z
	4233	846.6	4.645 MHz	4.1627 MHz	Plot A1
HSPA+ 1900MHz	9262	1852.4	4.650 MHz	4.1500 MHz	Plot B1
	9400	1880	4.684 MHz	4.1574 MHz	Plot C1
	9538	1907.6	4.698 MHz	4.1616 MHz	Plot D1
GSM 850MHz	128	824.2	321.600 KHz	253.0095 KHz	Plot E1
	190	836.6	319.839 KHz	243.4673 KHz	Plot F1
	251	848.8	324.352 KHz	248.5550 KHz	Plot G1
GSM 1900MHz	512	1850.2	316.868 KHz	241.8836 KHz	Plot H1
	661	1880.0	307.719 KHz	245.1880 KHz	Plot I1
	810	1909.8	316.844 KHz	245.0216 KHz	Plot J2
GPRS 850MHz	128	824.2	318.420 KHz	246.0980 KHz	Plot K1
	190	836.6	320.418 KHz	247.6663 KHz	Plot L1
	251	848.8	313.173 KHz	243.2653 KHz	Plot M1
GPRS 1900MHz	512	1850.2	319.780 KHz	245.5256 KHz	Plot N1
	661	1880.0	325.974 KHz	247.0970 KHz	Plot O1
	810	1909.8	320.756 KHz	246.4365 KHz	Plot P1

3. Test Plots:

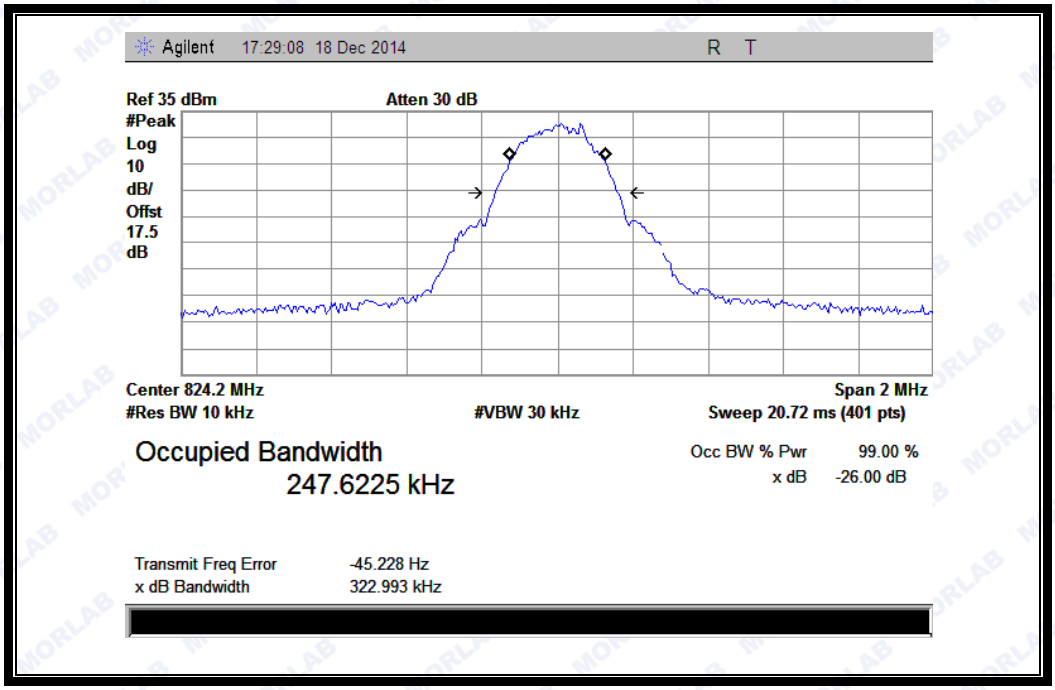

(Plot A: EGPRS 850MHz Channel = 128)

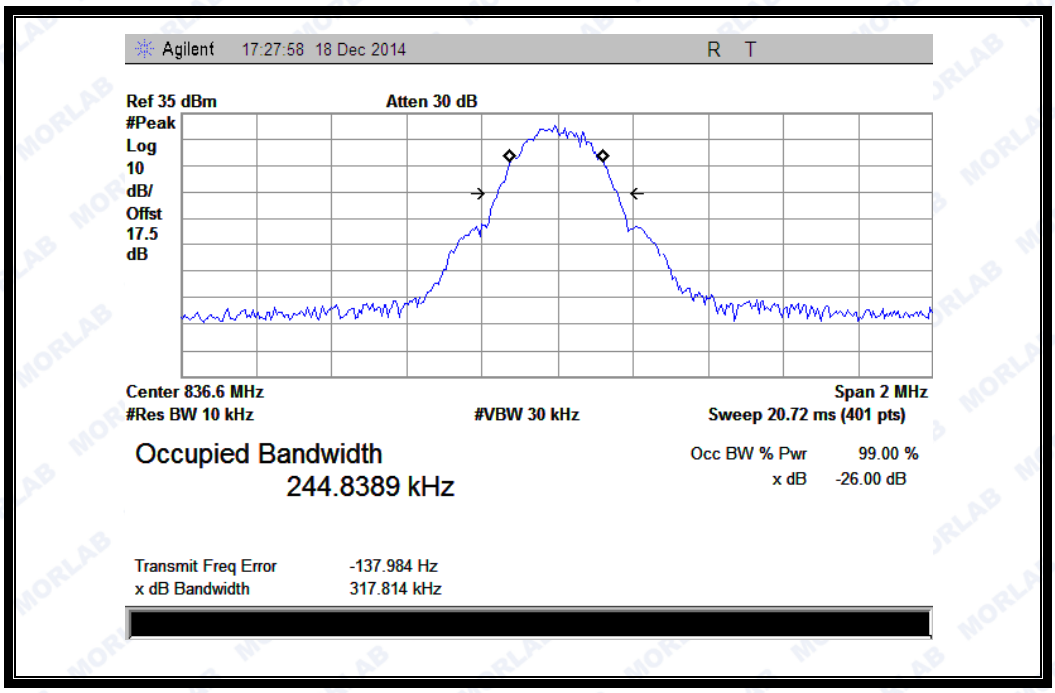

(Plot B: EGPRS 850MHz Channel = 190)

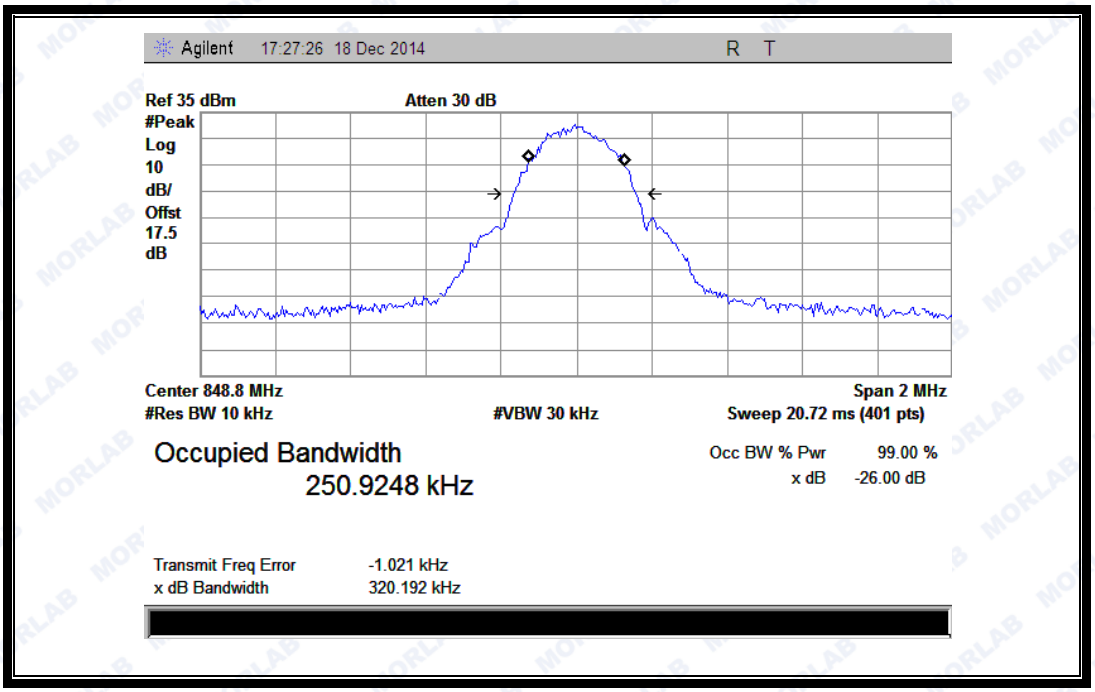

(Plot C: EGPRS 850MHz Channel = 251)

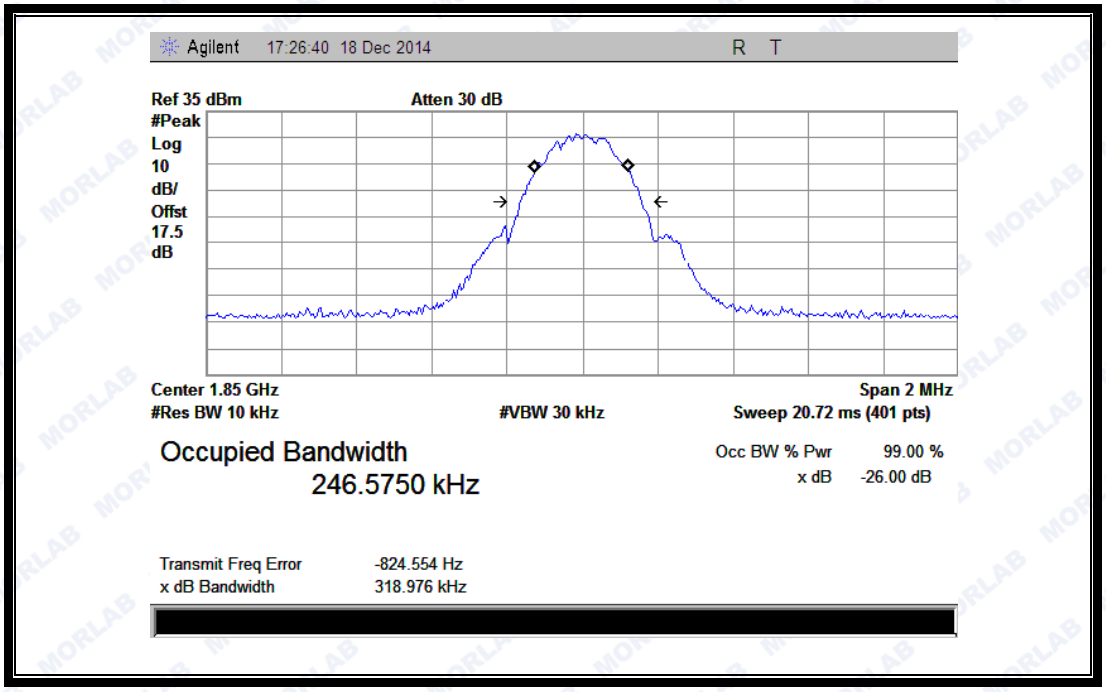

(Plot D: EGPRS1900MHz Channel = 512)

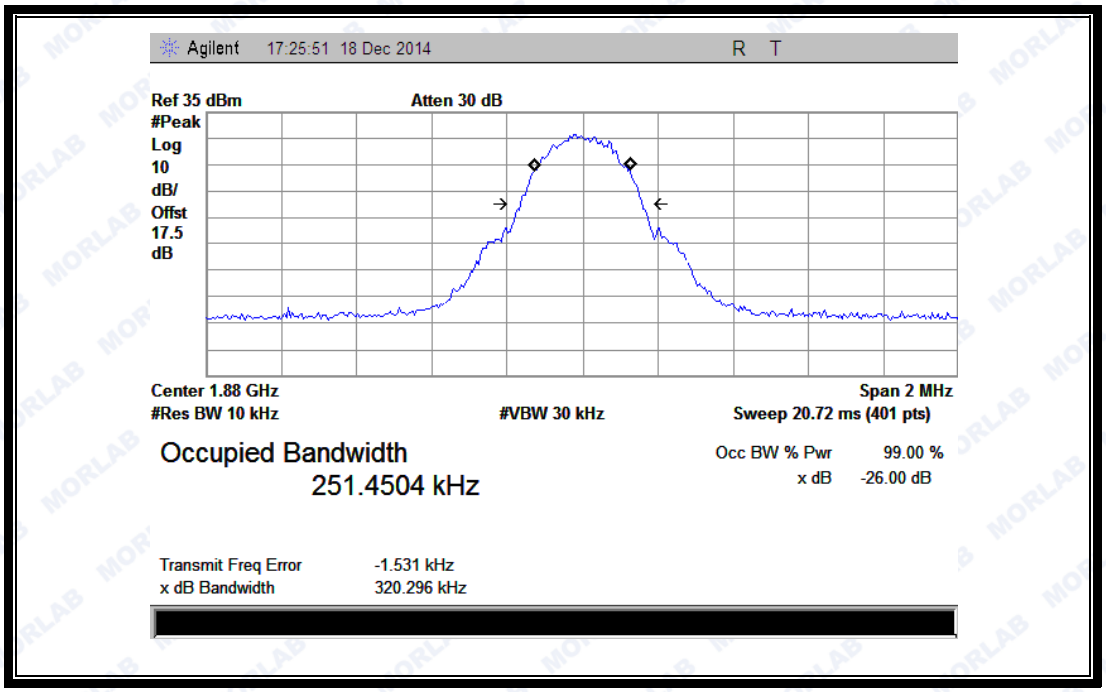

(Plot E: EGPRS1900MHz Channel = 661)

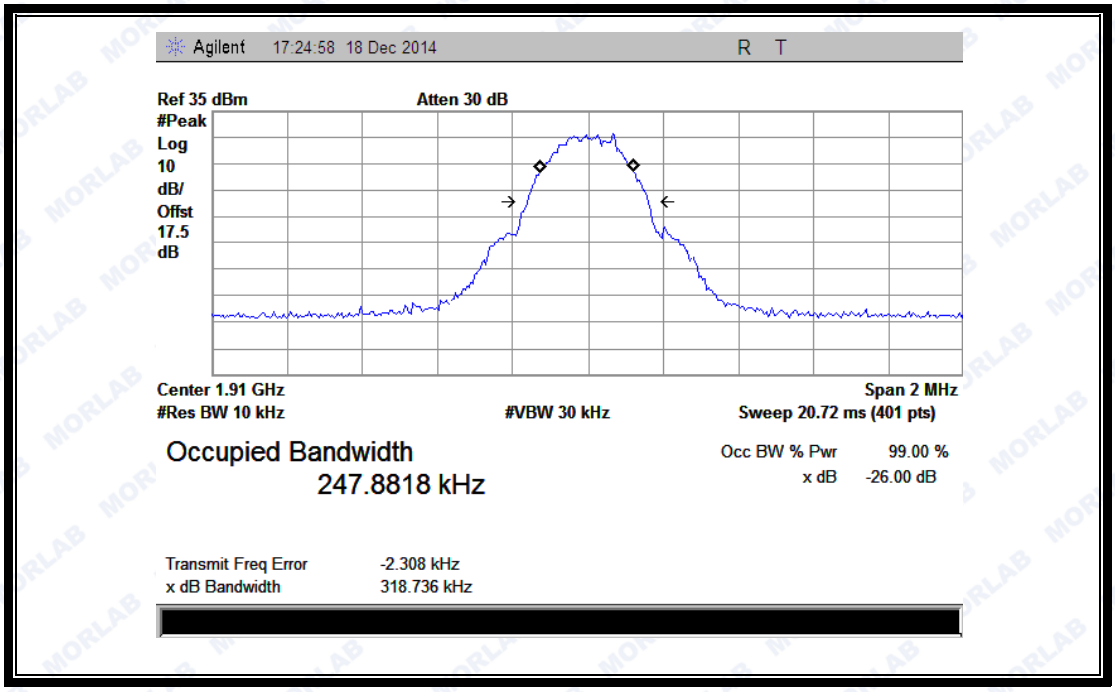

(Plot F: EGPRS 1900MHz Channel = 810)

(Plot G: WCDMA 850MHz Channel = 4132)

(Plot H: WCDMA 850 MHz Channel = 4175)

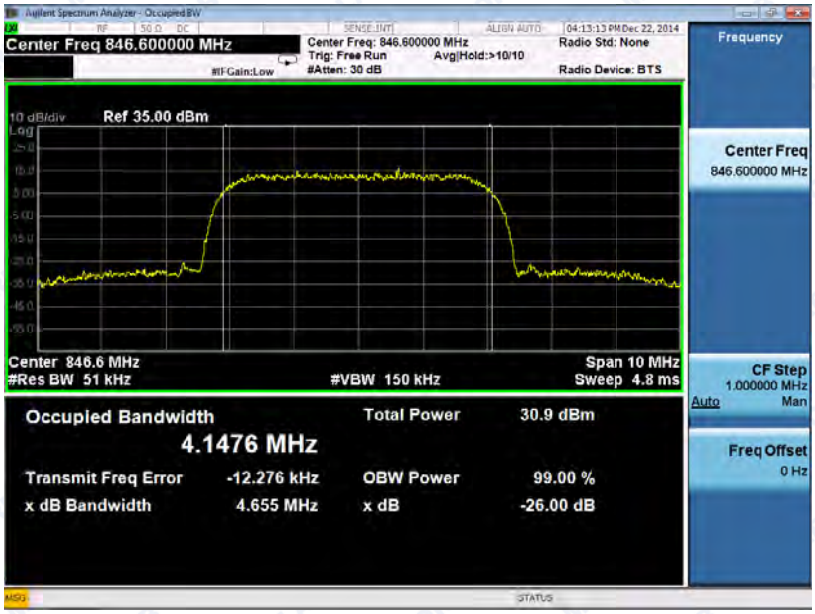

(Plot I: WCDMA 850MHz Channel = 4233)

(Plot J: WCDMA 1900MHz Channel = 9262)

(Plot K: WCDMA 1900 MHz Channel = 9400)

(Plot L: WCDMA1900MHz Channel = 9538)

(Plot M: HSDPA 850MHz Channel = 4132)

(Plot N: HSDPA850 MHz Channel = 4175)

(Plot O: HSDPA 850 MHz Channel = 4233)

(Plot P: HSDPA1900 MHz Channel = 9262)

(Plot Q: HSDPA1900 MHz Channel = 9400)

(Plot R: HSDPA 1900 MHz Channel = 9538)

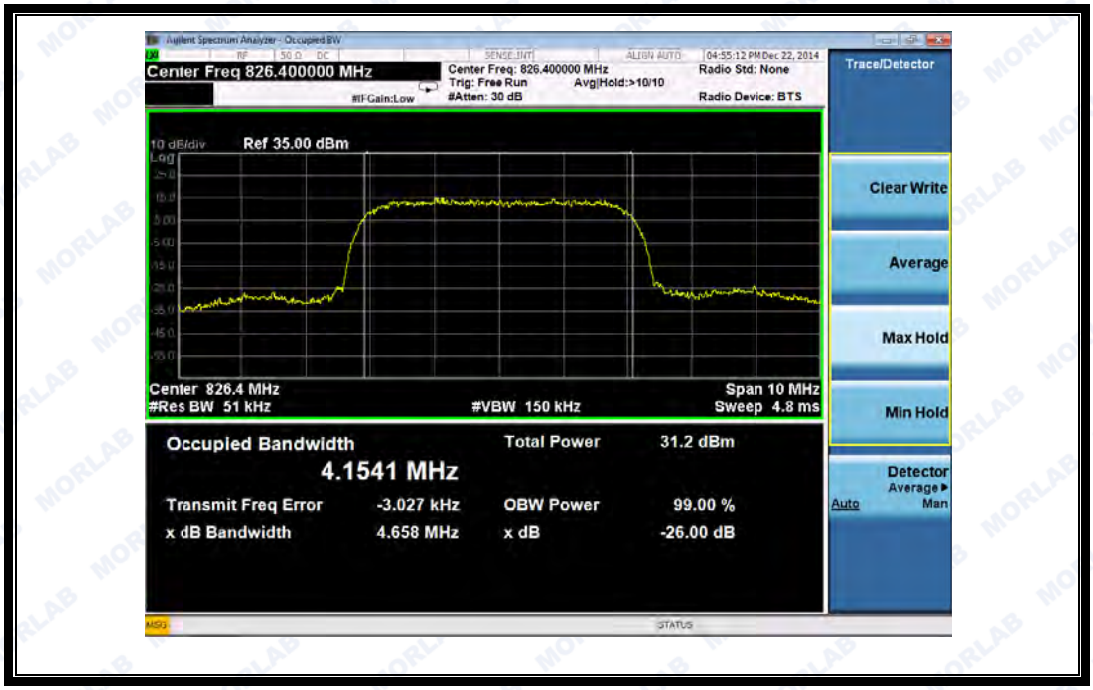

(Plot S: HSUPA850 MHz Channel = 4132)

(Plot T: HSUPA850 MHz Channel = 4175)

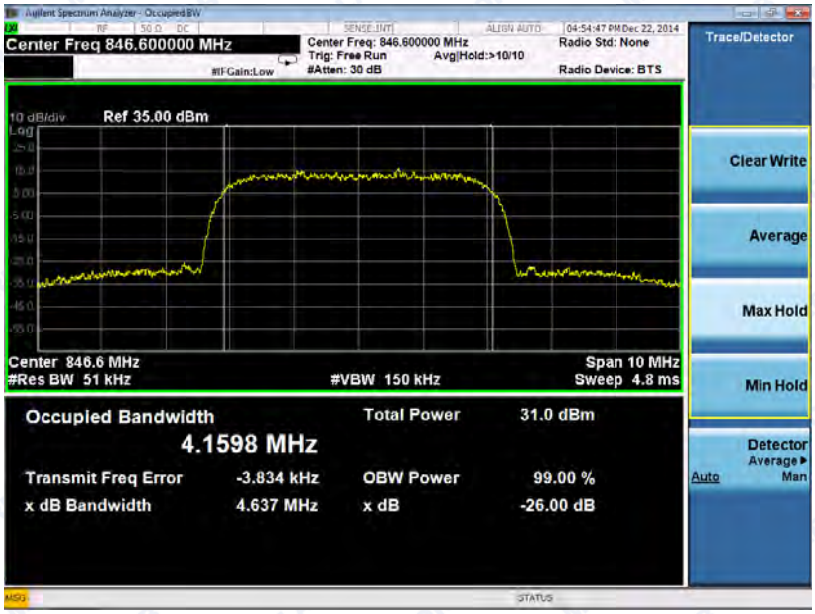

(Plot U: HSUPA850 MHz Channel = 4233)

(Plot V: HSUPA1900 MHz Channel = 9262)

(Plot W: HSUPA1900 MHz Channel = 9400)

(Plot X: HSUPA1900 MHz Channel = 9538)

MORLAB GROUP
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
Tel: 86-755-36698555 Http://www.morlab.com
Fax: 86-755-36698525 E-mail: service@morlab.cn

(Plot Y: HSPA+850 MHz Channel = 4132)

(Plot Z: HSPA+850 MHz Channel = 4175)

(Plot A1:HSPA+850 MHz Channel = 4233)

(Plot B1: HSPA+1900 MHz Channel = 9262)

(Plot C1: HSPA+1900 MHz Channel = 9400)

(Plot D1: HSPA+1900 MHz Channel = 9538)

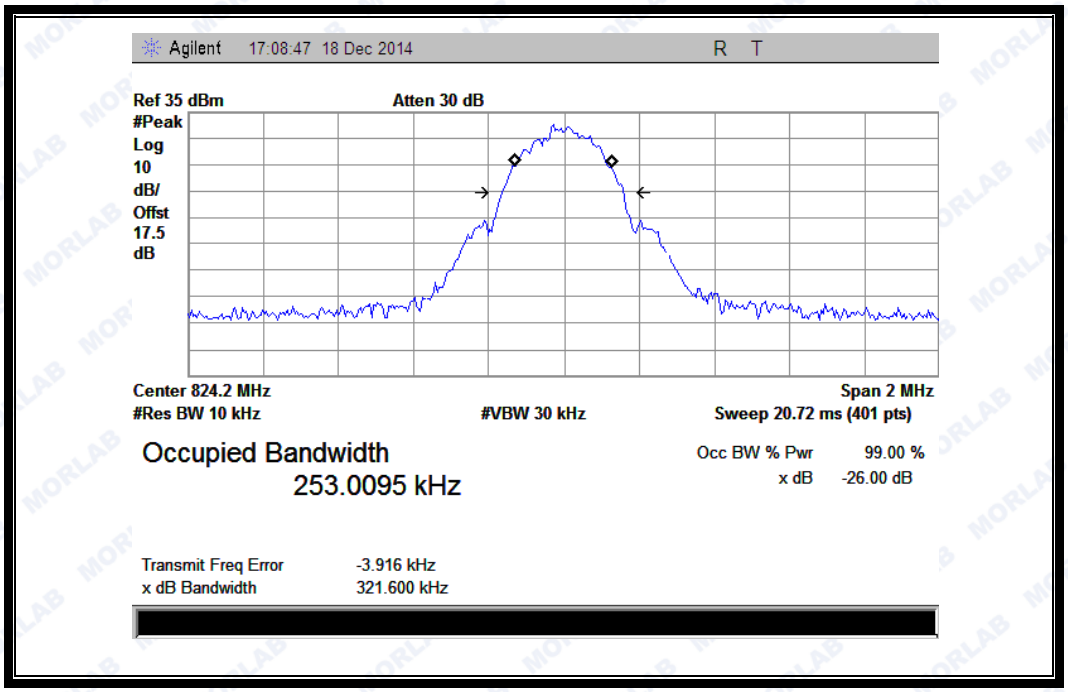

(Plot E1: GSM 850MHz Channel = 128)

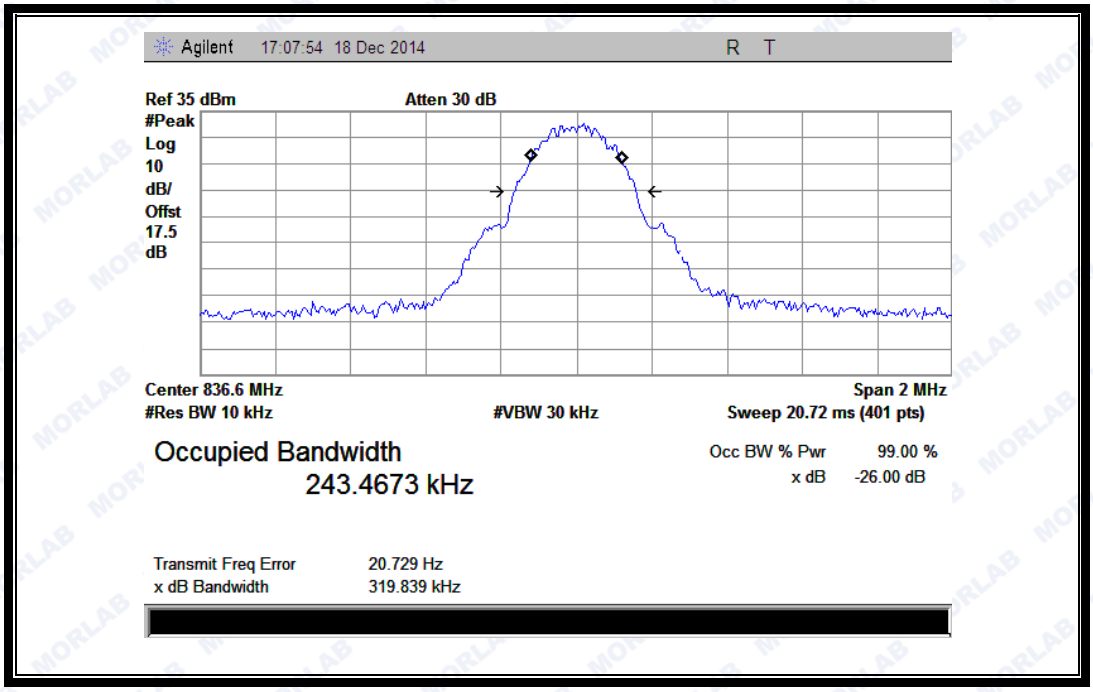

(Plot F1:GSM 850MHz Channel = 190)

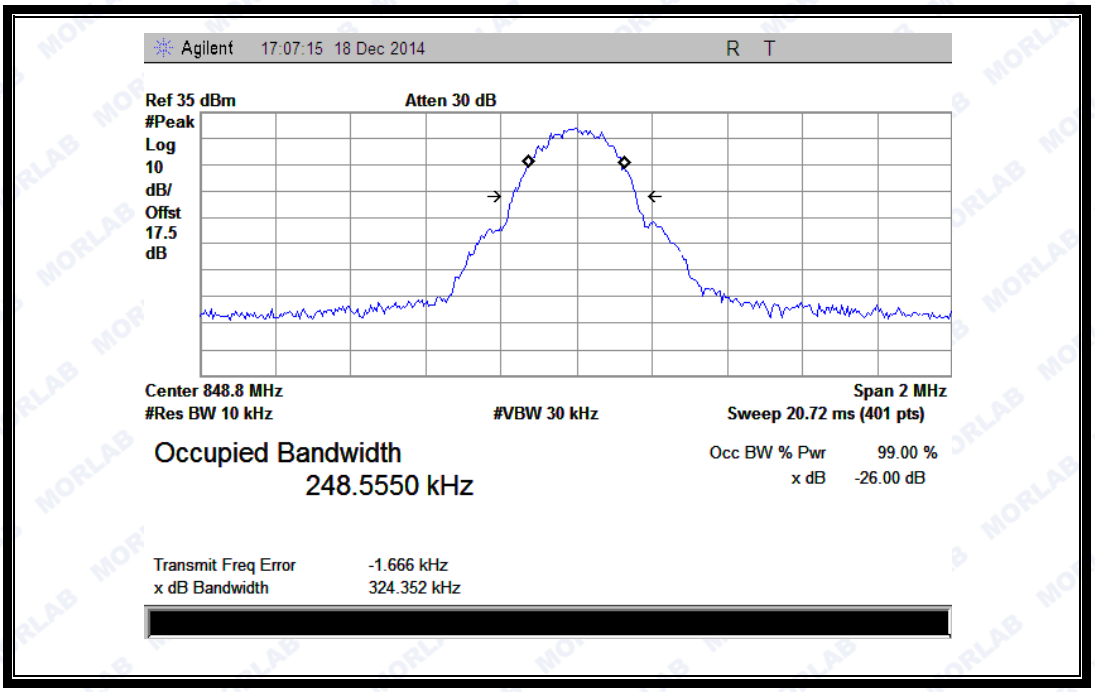

(Plot G1: GSM 850MHz Channel = 251)

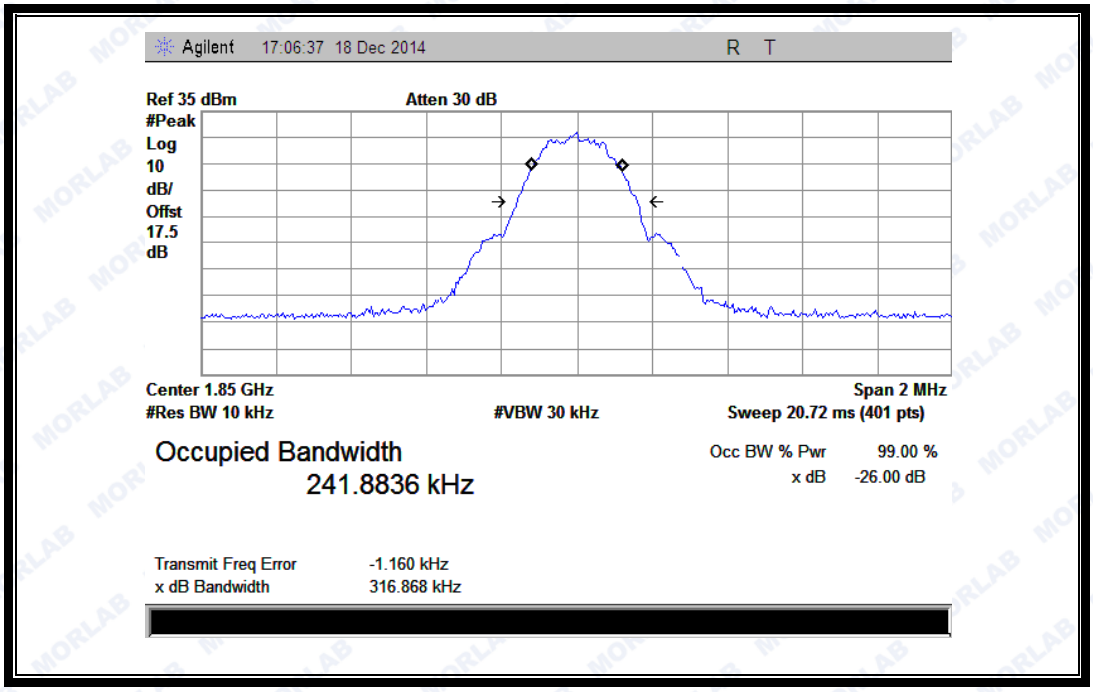

(Plot H1: GSM 1900MHz Channel = 512)

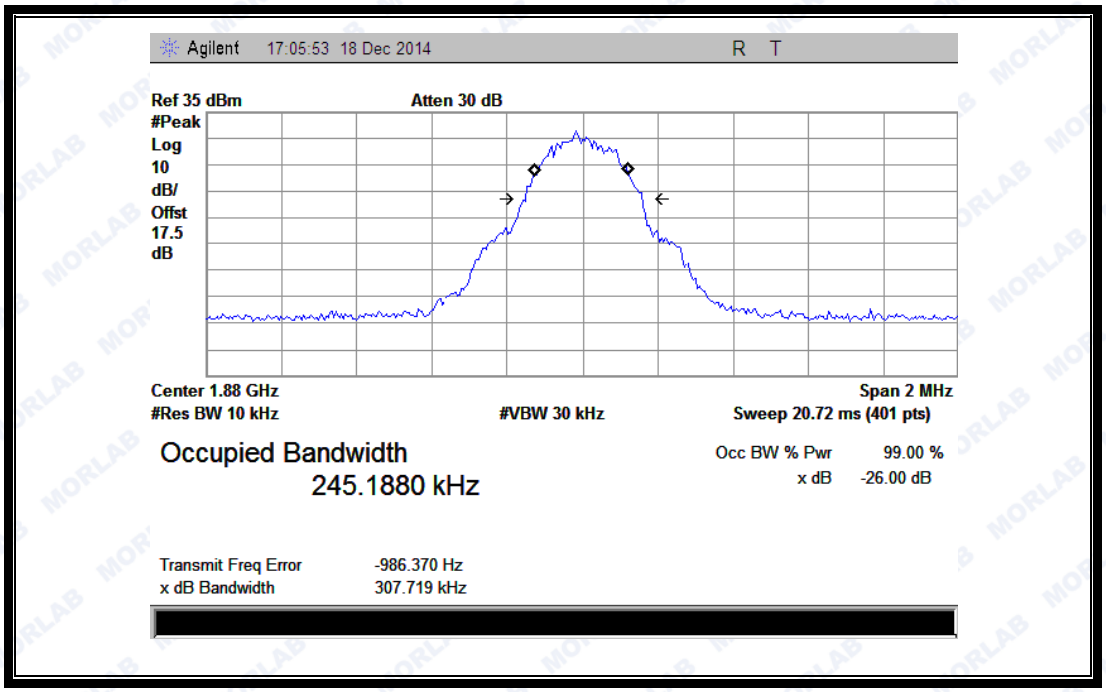

(Plot I1: GSM 1900MHz Channel = 661)

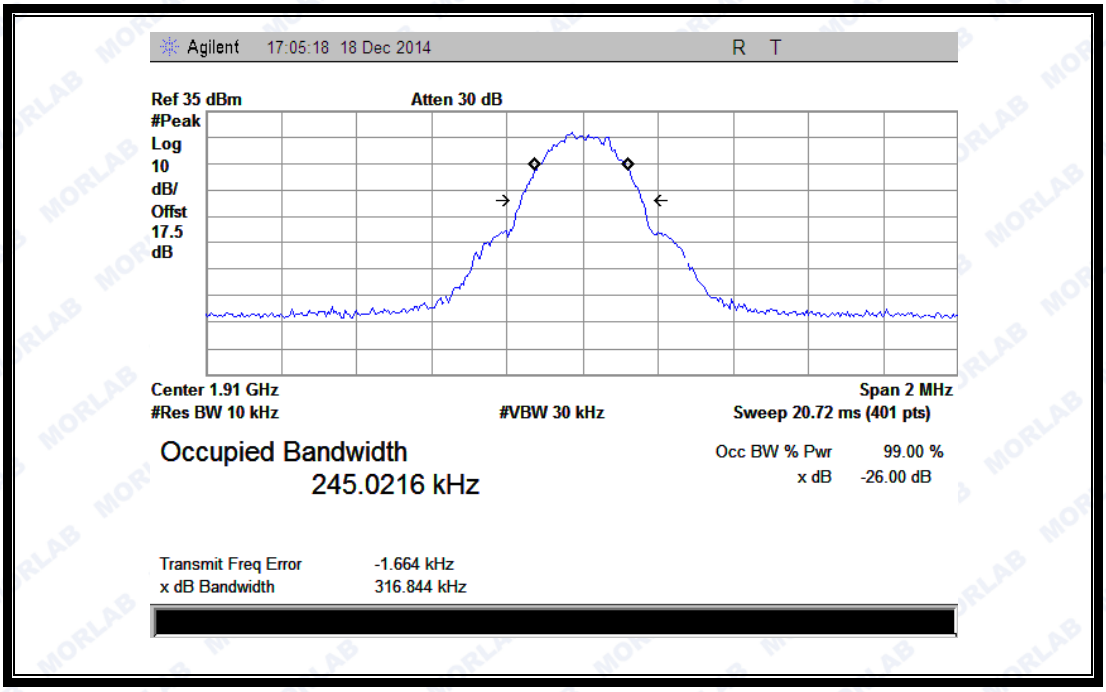

(Plot J1: GSM 1900MHz Channel = 810)

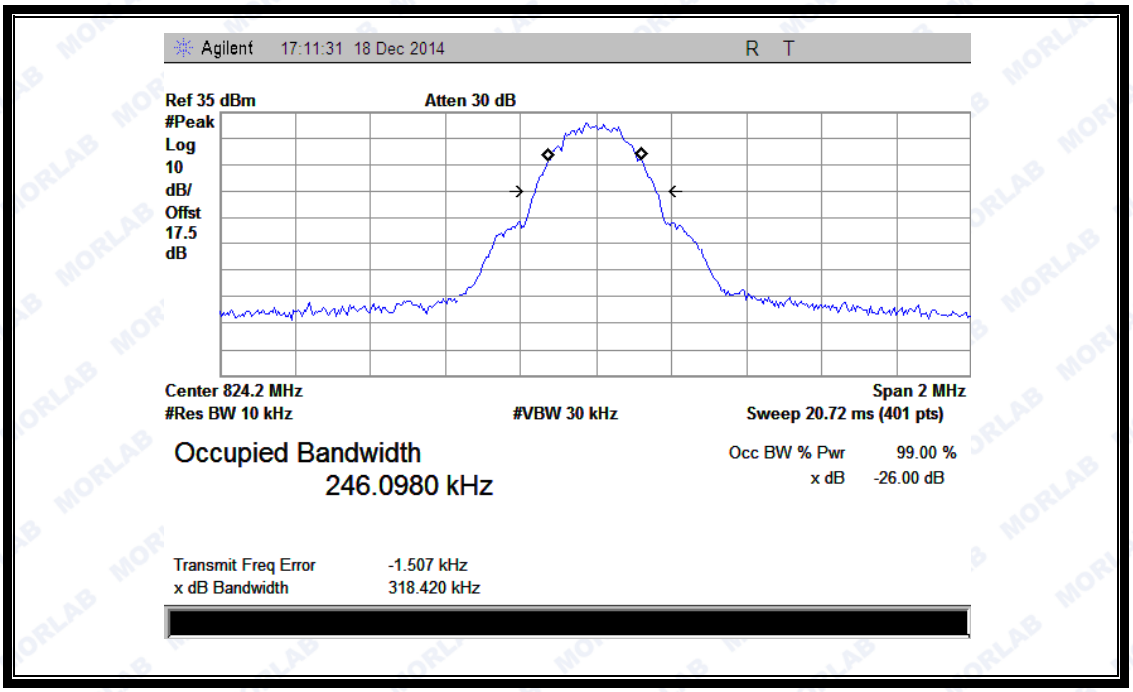

(Plot K1: GPRS 850MHz Channel = 128)

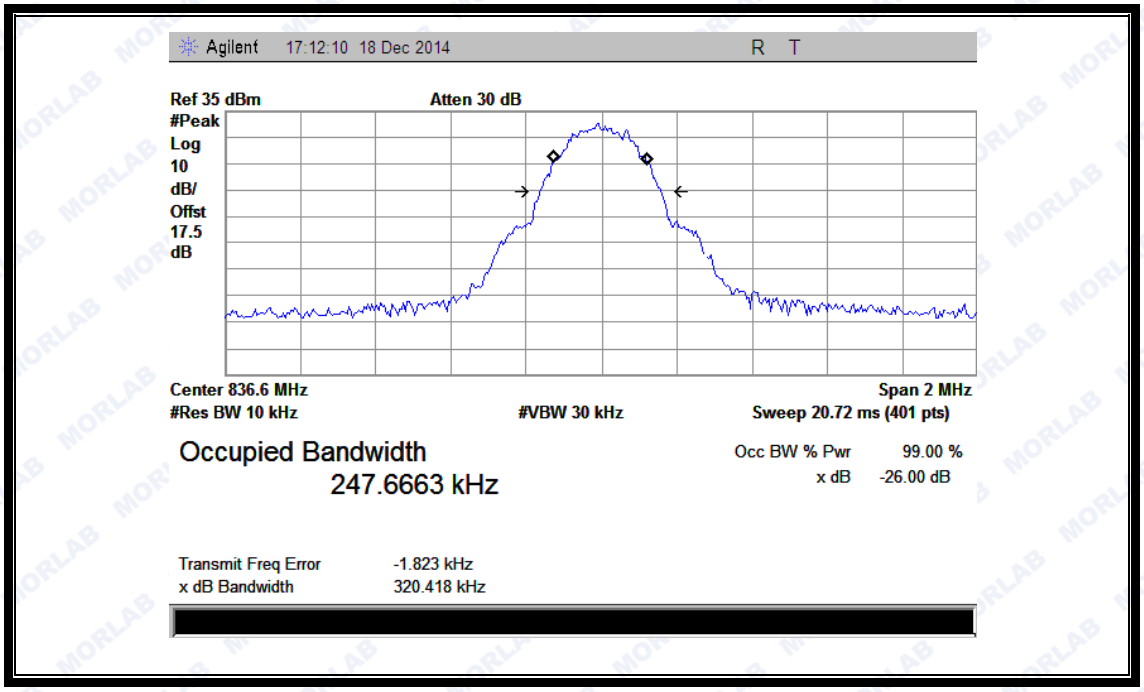

(Plot L1:GPRS 850MHz Channel = 190)

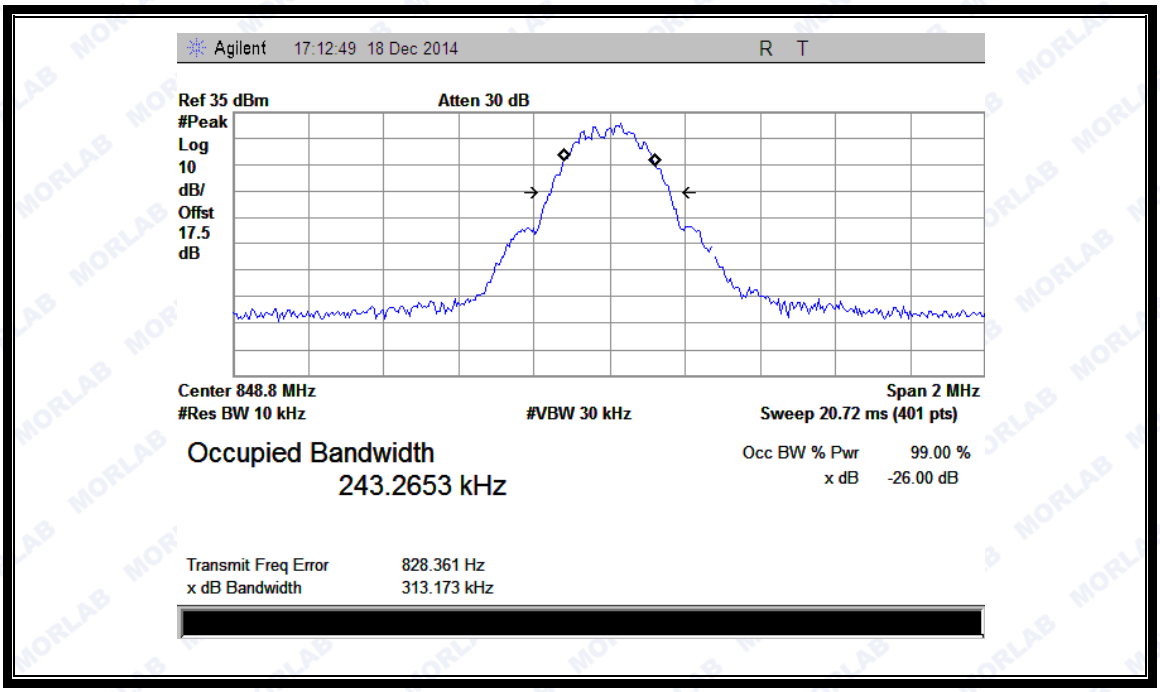

(Plot M1: GPRS850MHz Channel = 251)

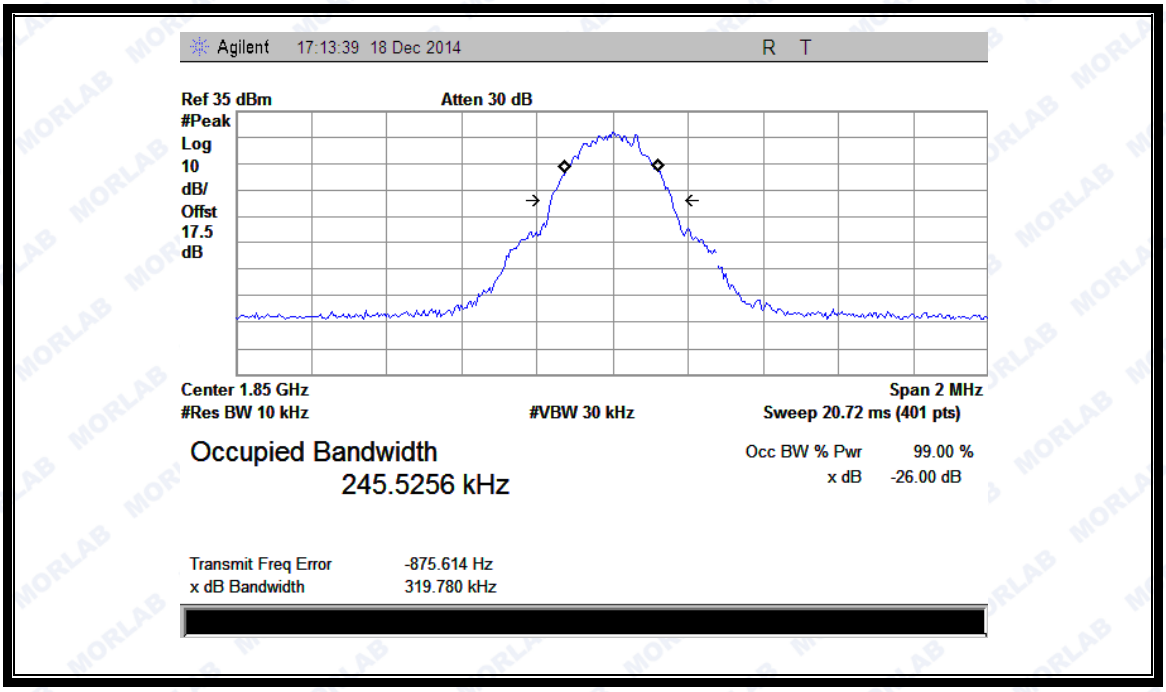

(Plot N1: GPRS 1900MHz Channel = 512)

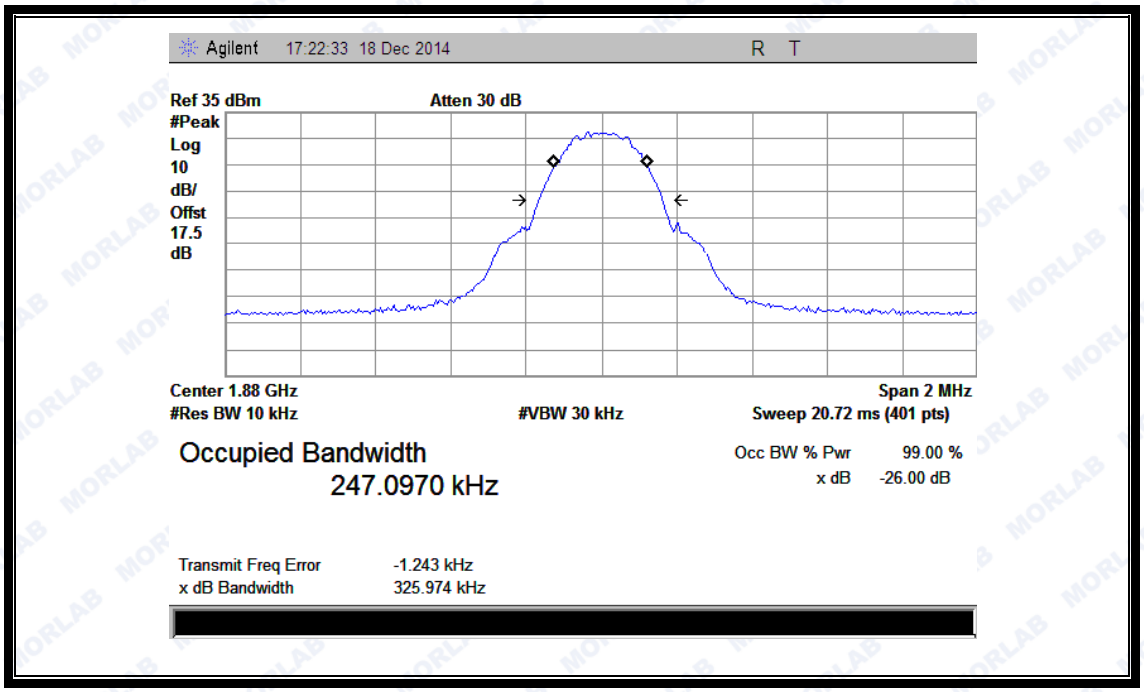

(Plot O1: GPRS 1900MHz Channel = 661)

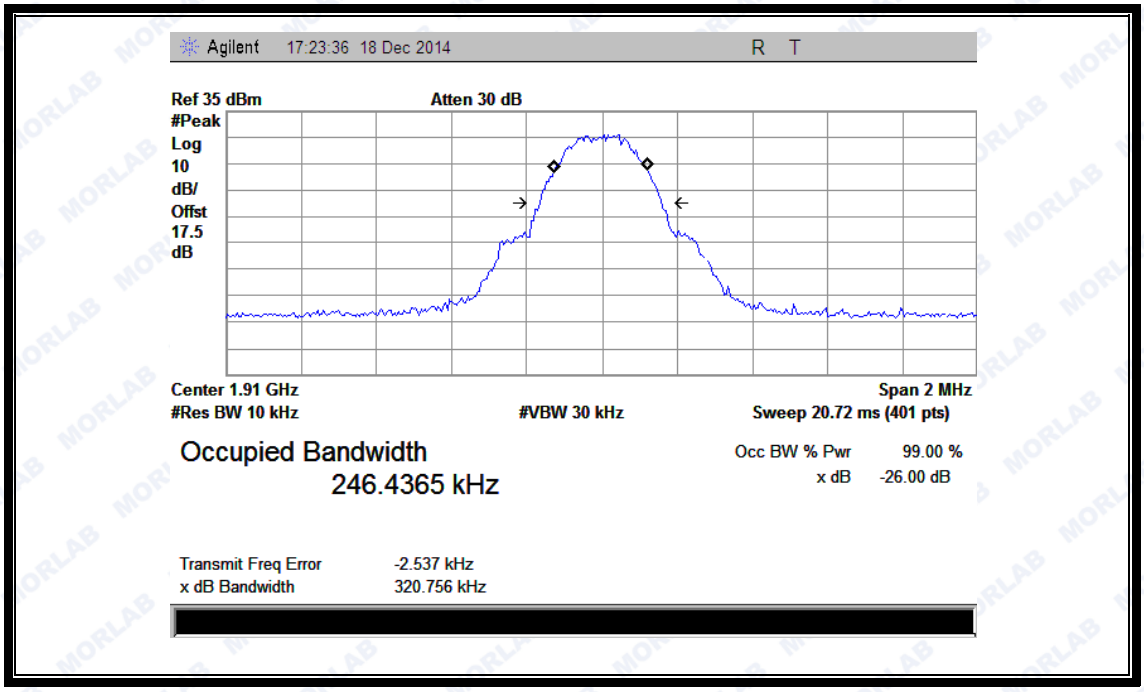

(Plot P1: GPRS 1900MHz Channel = 810)

2.4 Frequency Stability

2.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

(a) The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.
(b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Test Description

1. Test Setup:

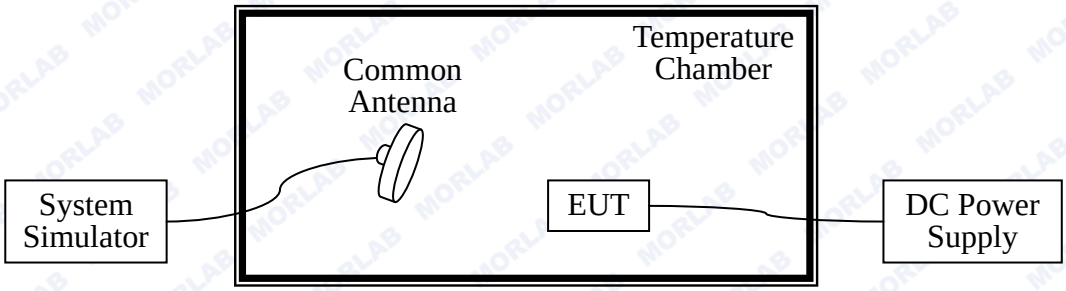

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
DC Power Supply	Good Will	GPS-3030DD	EF920938	2014.02.26	2015.02.25
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2014.02.26	2015.02.25

2.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.8VDC, 4.2VDC and 3.45VDC, which are specified by the applicant; the normal temperature here used is 25°C. The frequency deviation limit of

850MHz band is ±2.5ppm, and 1900MHz is ±1ppm.

1. GSM 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-22.45	±2060.5	22.12	±2091.5	18.17	±2122	PASS
	-20	27.21		12.23		-15.02		
	-10	-2.22		-17.46		16.11		
	0	30.22		33.14		5.05		
	+10	21.29		-24.93		3.02		
	+20	-19.56		-17.19		10.76		
	+30	34.36		19.36		-16.53		
	+40	42.63		19.64		-2.13		
	+55	35.28		23.27		-12.89		
4.2	+25	-15.73		29.05		-7.55		
3.45	+25	-17.65		38.13		7.78		

2. GSM 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	17.11	±1850.2	27.18	±1880.0	32.15	±1909.8	PASS
	-20	37.18		-21.48		-18.88		
	-10	-2.05		-13.76		-16.88		
	0	41.06		-18.38		19.32		
	+10	1.98		-21.61		25.31		
	+20	-19.76		15.52		32.26		
	+30	39.76		-0.78		-29.21		
	+40	45.16		37.37		19.33		
	+55	39.88		24.02		-19.37		
4.2	+25	37.88		23.72		28.09		
3.45	+25	-5.69		16.22		18.89		

3. EDGE 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-30.12	±2060.5	26.19	±2091.5	7.22	±2122	PASS
	-20	38.98		13.73		-13.80		
	-10	-3.25		-18.35		12.16		
	0	41.06		37.10		5.05		
	+10	1.99		-22.06		3.02		
	+20	-19.86		-16.11		10.76		
	+30	39.56		17.76		-16.51		
	+40	48.62		15.54		-2.11		
	+55	39.98		3.57		-12.89		
4.2	+25	-15.71		14.05		-7.83		
3.45	+25	-15.51		7.93		6.88		

4. EDGE 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-11.87	±1850.2	26.12	±1880.0	1.57	±1909.8	PASS
	-20	2.72		7.63		-13.76		
	-10	1.25		-25.78		-13.21		
	0	2.57		-1.36		13.23		
	+10	-10.78		-17.98		5.23		
	+20	-2.11		-21.61		38.81		
	+30	15.03		14.58		-26.88		
	+40	5.43		-0.78		19.34		
	+55	-2.46		39.87		-16.77		
4.2	+25	18.02		4.08		26.59		
3.45	+25	-7.19		14.13		19.03		

5. WCDMA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	17.11	±2066	11.21	±2087.5	-1.10	±2116.5	PASS
	-20	-7.11		-0.62		-18.48		
	-10	-3.43		22.45		7.67		
	0	16.47		13.25		4.32		
	+10	30.18		1.31		-17.33		
	+20	32.07		-12.22		11.90		
	+30	-7.98		30.62		6.63		
	+40	26.31		13.45		30.93		
	+55	12.10		-12.42		19.76		
4.2	+25	-6.17		32.12		23.89		
3.45	+25	18.16		-17.80		-18.12		

6. WCDMA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-2.12	±1852.4	-11.67	±1880.0	-1.89	±1907.6	PASS
	-20	19.15		12.28		27.60		
	-10	5.35		-14.36		15.11		
	0	18.92		18.59		-3.17		
	+10	32.40		21.39		18.12		
	+20	13.55		39.27		-10.39		
	+30	2.31		2.37		17.47		
	+40	-12.52		-13.47		29.84		
	+55	-13.65		-5.81		-2.53		
4.2	+25	22.23		14.68		21.05		
3.45	+25	23.12		26.37		-25.11		

7. HSDPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	29.46	±2066	-24.87	±2087.5	17.11	±2116.5	PASS
	-20	-8.66		-14.06		14.41		
	-10	20.85		39.23		21.57		
	0	12.78		-8.41		-24.37		
	+10	-14.75		-13.95		-13.96		
	+20	8.78		-24.37		34.11		
	+30	-1.49		12.88		-8.31		
	+40	17.14		-14.75		-13.95		
	+55	-23.61		23.37		25.37		
4.2	+25	38.03		7.93		7.98		
3.45	+25	17.14		-31.21		1.98		

8. HSDPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	11.47	±1852.4	-3.54	±1880	6.50	±1907.6	PASS
	-20	-16.05		23.71		-8.48		
	-10	22.42		15.37		-14.02		
	0	-3.11		-12.21		-9.01		
	+10	21.71		10.60		5.64		
	+20	20.12		-4.81		-3.85		
	+30	-15.01		37.11		9.57		
	+40	24.71		8.46		29.32		
	+55	16.42		-24.88		-12.42		
4.2	+25	-11.25		27.53		-2.83		
3.45	+25	11.53		-2.17		14.32		

9. HSUPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	27.88	±2066	15.51	±2087.5	15.05	±2116.5	PASS
	-20	-15.40		-19.43		27.52		
	-10	-12.71		-12.79		39.71		
	0	-14.09		-0.44		-7.32		
	+10	-0.37		0.01		-4.91		
	+20	-11.85		-6.64		21.35		
	+30	29.57		25.25		-5.94		
	+40	-11.89		9.73		13.78		
	+55	-0.45		27.76		29.55		
4.2	+25	2.78		-4.67		31.31		
3.45	+25	3.65		5.65		-6.60		

10. HSUPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	34.54	±1852.4	-11.69	±1880	7.17	±1907.6	PASS
	-20	29.13		-0.74		2.12		
	-10	7.82		0.11		-4.85		
	0	2.41		14.82		17.08		
	+10	-4.73		-15.25		-1.86		
	+20	16.22		-11.79		23.52		
	+30	-1.55		-0.44		-0.48		
	+40	24.16		1.25		-12.05		
	+55	14.79		-7.84		-5.81		
4.2	+25	-8.08		6.72		28.38		
3.45	+25	22.78		-1.72		-15.45		

11. HSPA+ 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	28.55	±2066	13.31	±2087.5	13.45	±2116.5	PASS
	-20	-14.40		-19.33		27.52		
	-10	-12.71		-12.79		38.71		
	0	-14.09		-0.44		-7.32		
	+10	-0.37		0.01		-4.91		
	+20	-11.85		-6.64		21.35		
	+30	29.57		25.25		-5.94		
	+40	-11.89		9.73		13.78		
	+55	-0.45		28.76		29.55		
4.2	+25	1.78		-4.67		31.98		
3.45	+25	1.35		7.35		-7.93		

12. HSPA+ 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	35.67	±1852.4	-12.67	±1880	7.98	±1907.6	PASS
	-20	29.23		-0.82		2.12		
	-10	7.82		0.21		-4.85		
	0	2.41		19.82		17.08		
	+10	-4.73		-15.25		-1.86		
	+20	16.22		-11.79		29.52		
	+30	-1.55		-0.44		-0.48		
	+40	24.16		1.25		-12.05		
	+55	14.79		-7.84		-5.81		
4.2	+25	-8.08		6.71		29.38		
3.45	+25	23.38		-1.22		-16.38		

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43+10*log(P)dB. This calculated to be -13dBm.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-20.13	Plot A1toA1.1	-13	PASS
	190	836.6	-20.38	Plot A2toA2.1		PASS
	251	848.8	-22.15	Plot A3toA3.1		PASS
GSM 1900MHz	512	1850.2	-20.53	Plot B1toB1.1	-13	PASS
	661	1880.0	-18.66	Plot B2toB2.1		PASS
	810	1909.8	-19.8	Plot B3toB3.1		PASS
EDGE 850MHz	128	824.2	-19.24	Plot C1toC1.1	-13	PASS
	190	836.6	-20.04	Plot C2toC2.1		PASS
	251	848.8	-19.45	Plot C3toC3.1		PASS
EDGE 1900MHz	512	1850.2	-19.76	Plot D1toD1.1	-13	PASS
	661	1880.0	-20.97	Plot D2toD2.1		PASS
	810	1909.8	-19.69	Plot D3toD3.1		PASS
WCDMA 850MHz	4132	826.4	<-25	Plot E1toE1.1	-13	PASS
	4175	835	<-25	Plot E2toE2.1		PASS
	4233	846.6	<-25	Plot E3toE3.1		PASS
WCDMA 1900MHz	9262	1852.4	<-25	Plot F1toF1.1	-13	PASS
	9400	1880	<-25	Plot F2toF2.1		PASS
	9538	1907.6	<-25	Plot F3toF3.1		PASS
HSDPA	4132	826.4	<-25	Plot G1toG1.1	-13	PASS

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
850MHz	4175	835	<-25	Plot G2toG2.1		PASS
	4233	846.6	<-25	Plot G3toG3.1		PASS
HSDPA 1900MHz	9262	1852.4	<-25	Plot H1toH1.1	-13	PASS
	9400	1880	<-25	Plot H2toH2.1		PASS
	9538	1907.6	<-25	Plot H3toH3.1		PASS
HSUPA 850MHz	4132	826.4	<-25	Plot I1toI1.1	-13	PASS
	4175	835	<-25	Plot I2toI2.1		PASS
	4233	846.6	<-25	Plot I3toI3.1		PASS
HSUPA 1900MHz	9262	1852.4	<-25	Plot J1toJ1.1	-13	PASS
	9400	1880	<-25	Plot J2toJ2.1		PASS
	9538	1907.6	<-25	Plot J3toJ3.1		PASS
HSPA+ 850MHz	4132	826.4	<-25	Plot K1toK1.1	-13	PASS
	4175	835	<-25	Plot K2toK2.1		PASS
	4233	846.6	<-25	Plot K3toK3.1		PASS
HSPA+ 1900MHz	9262	1852.4	<-25	Plot L1toL1.1	-13	PASS
	9400	1880	<-25	Plot L2toL2.1		PASS
	9538	1907.6	<-25	Plot L3toL3.1		PASS

2. Test Plots for the Whole Measurement Frequency Range:

Note: the power of the EUT transmitting frequency should be ignored.

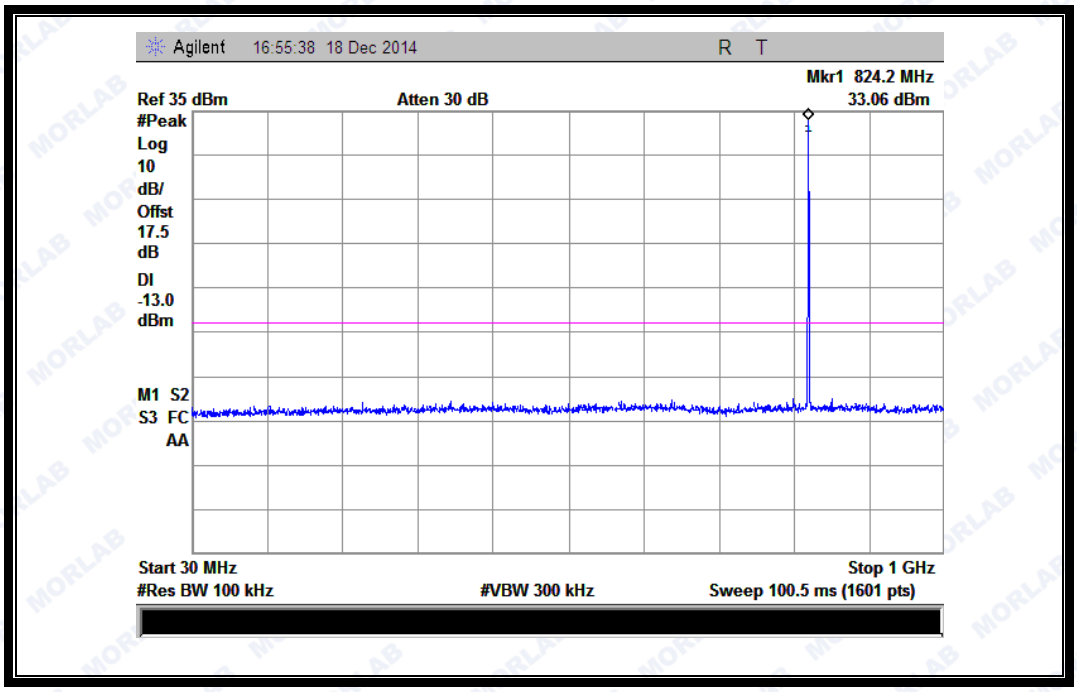

(Plot A1:GSM 850MHz Channel = 128, 30MHz to 1GHz)

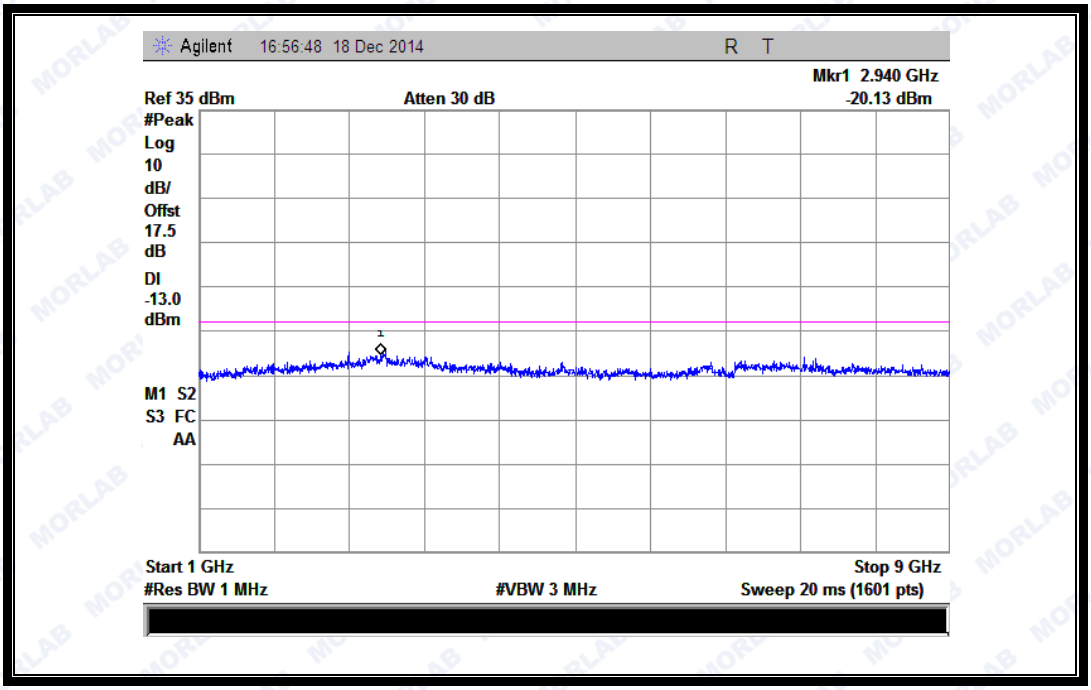

(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)

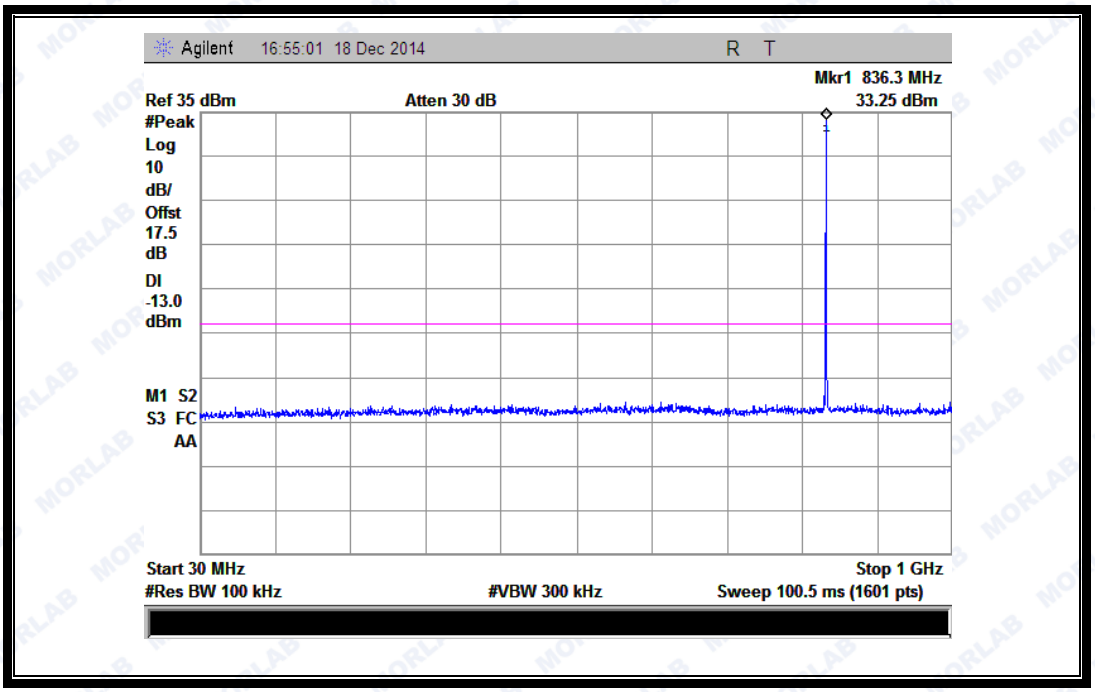

(Plot A2:GSM 850MHz Channel = 190, 30MHz to 1GHz)

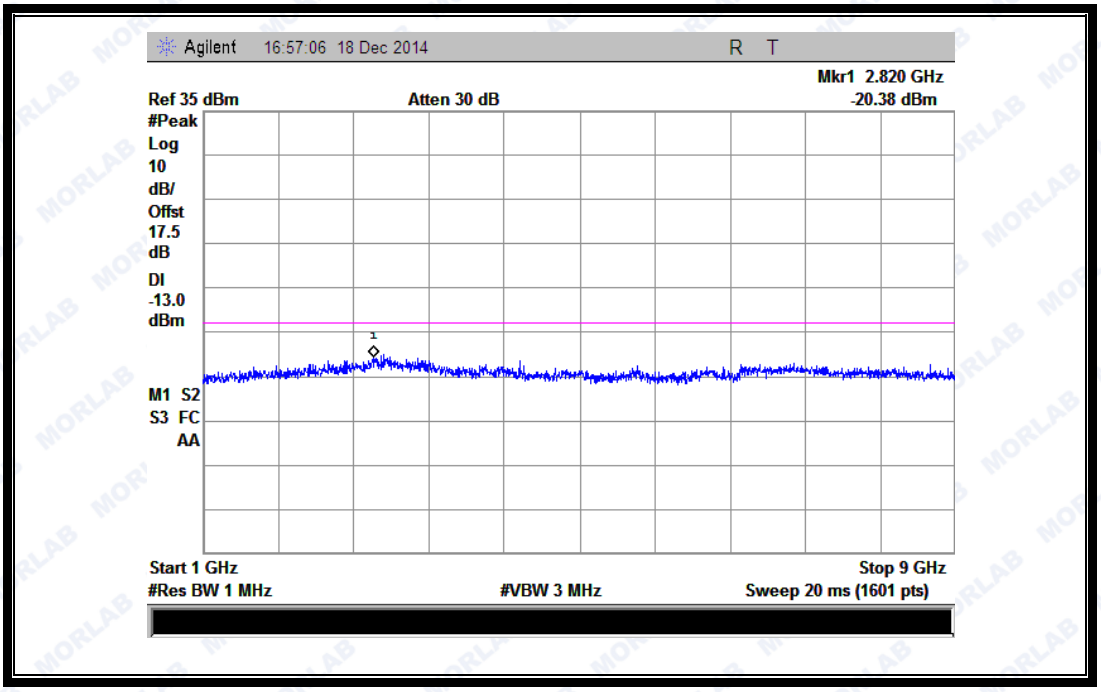

(Plot A2.1: GSM 850MHz Channel = 190, 1GHz to 9GHz)

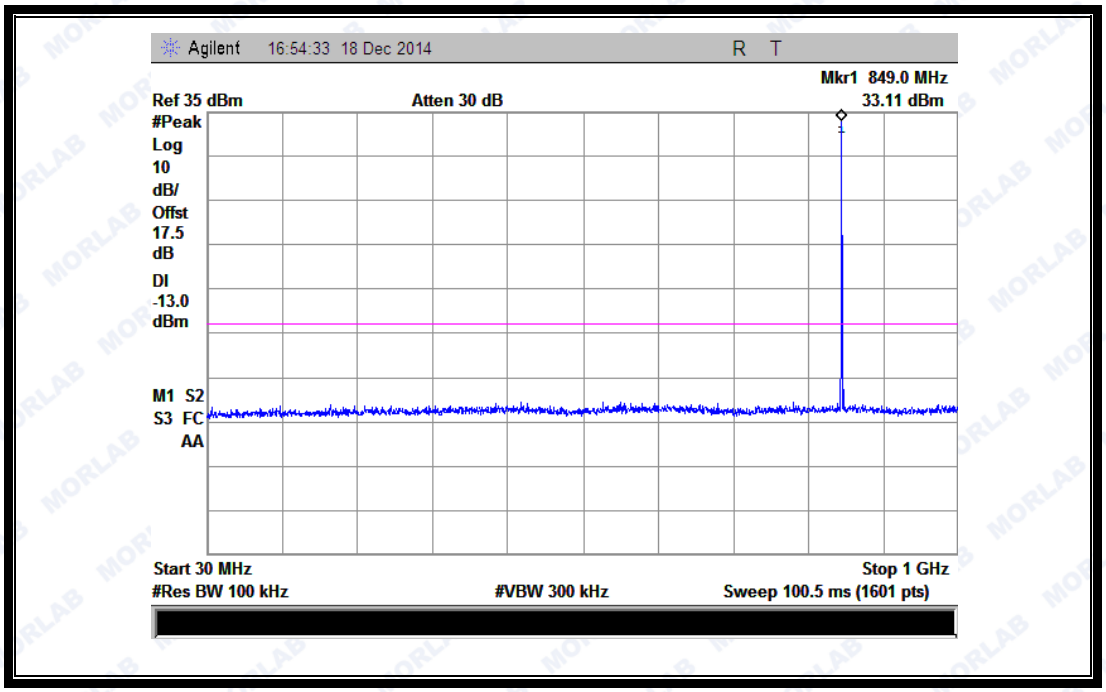

(Plot A3:GSM 850MHz Channel = 251, 30MHz to 1GHz)

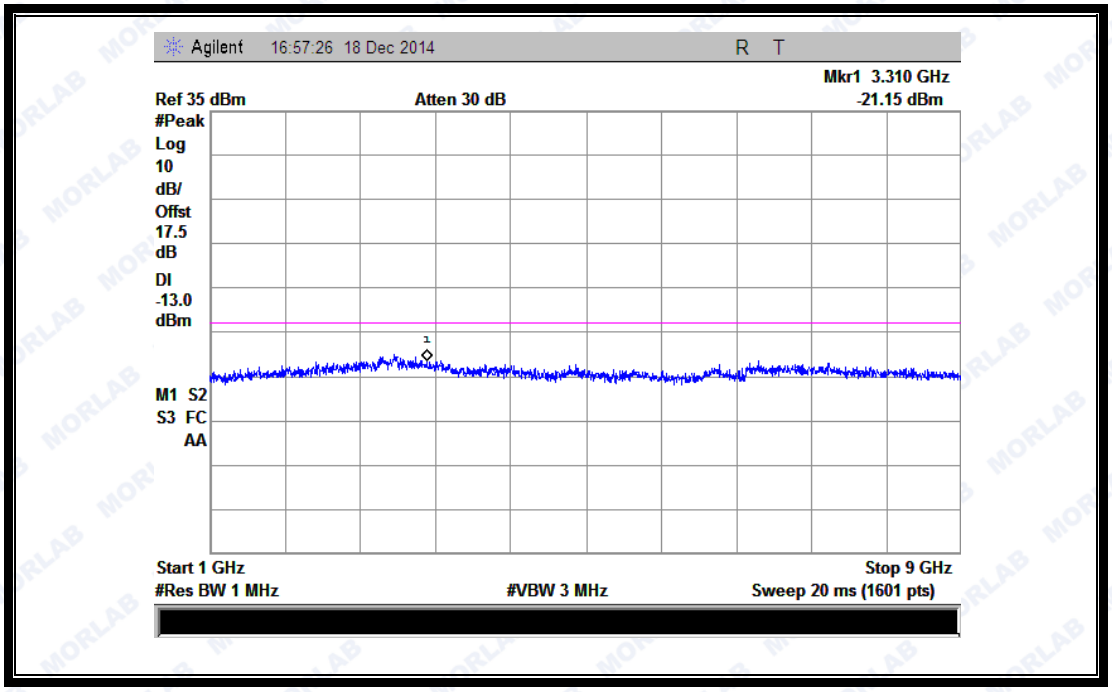

(Plot A3.1: GSM 850MHz Channel = 251, 1GHz to 9GHz)

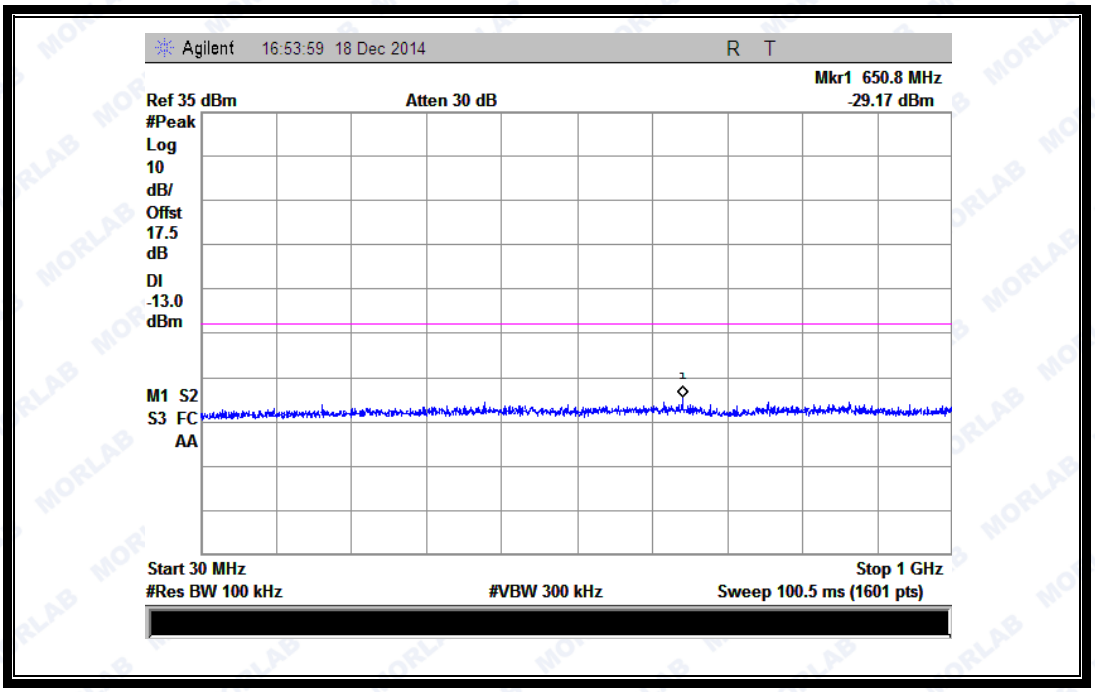

(Plot B1: GSM 1900MHz Channel = 512, 30MHz to 1GHz)

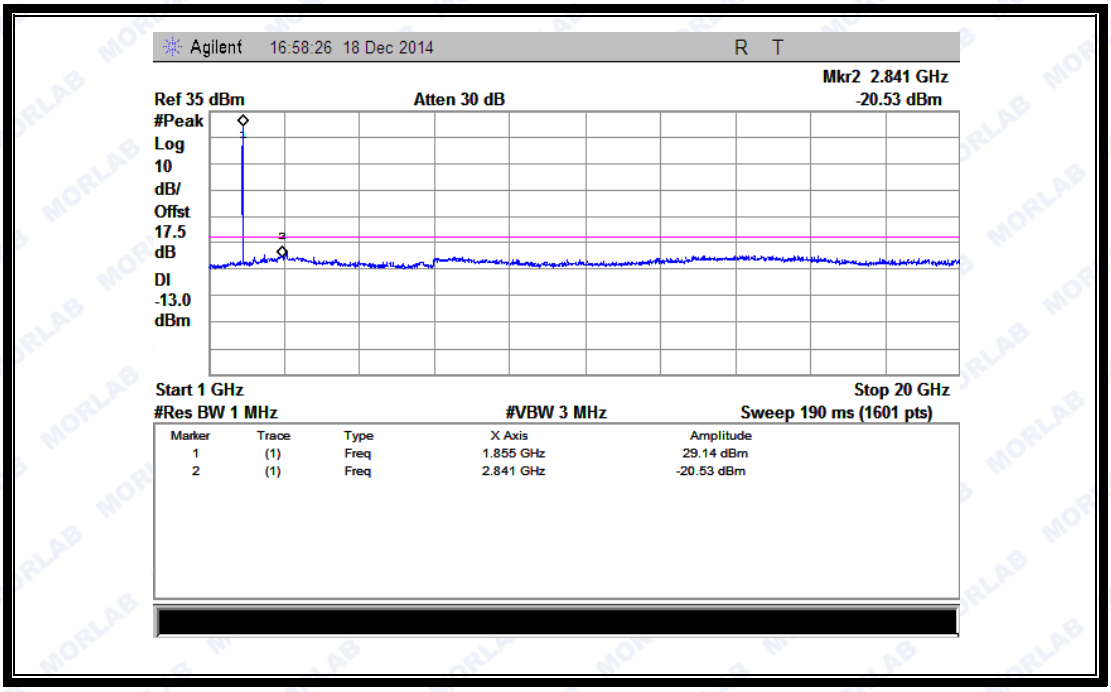

(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)

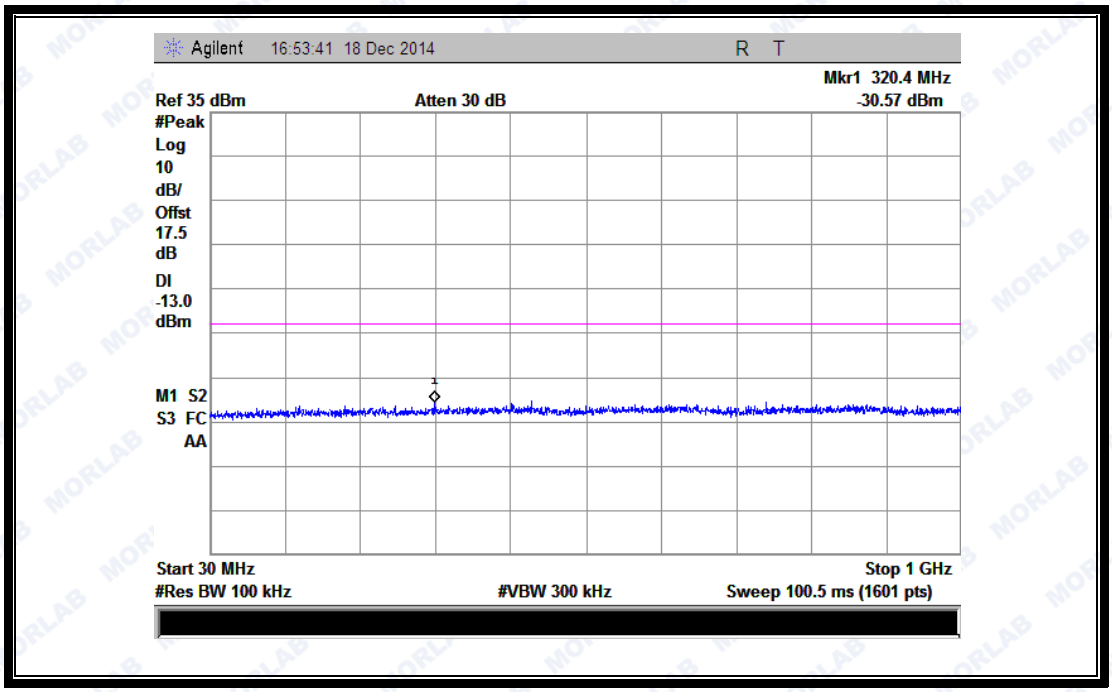

(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)

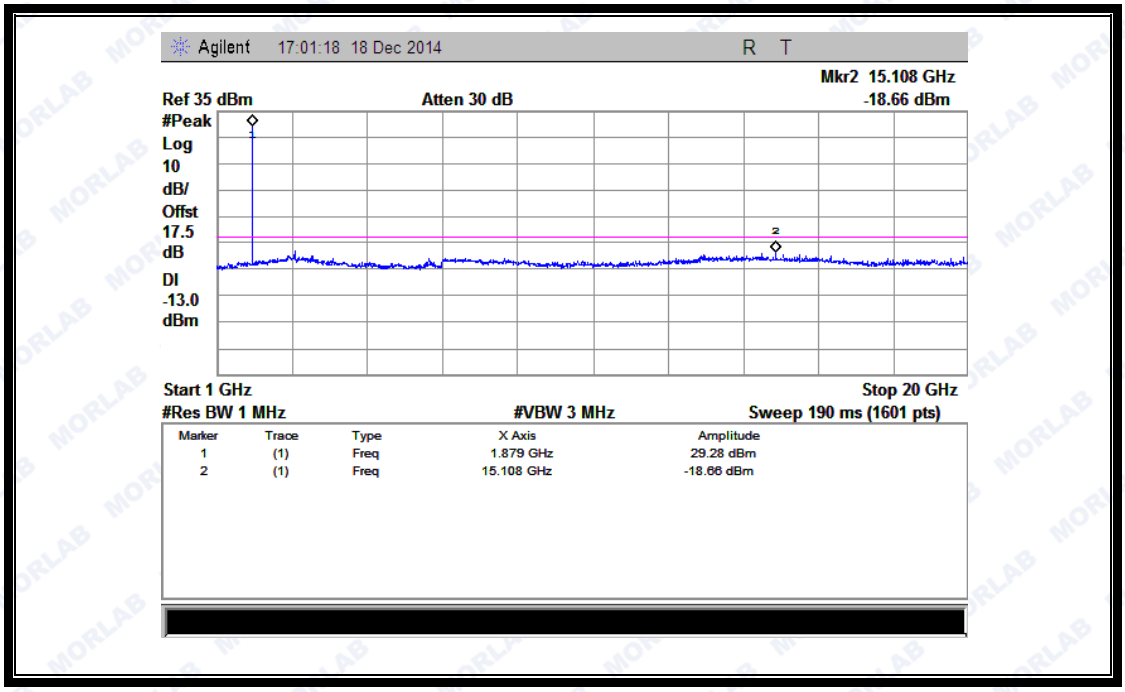

(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)

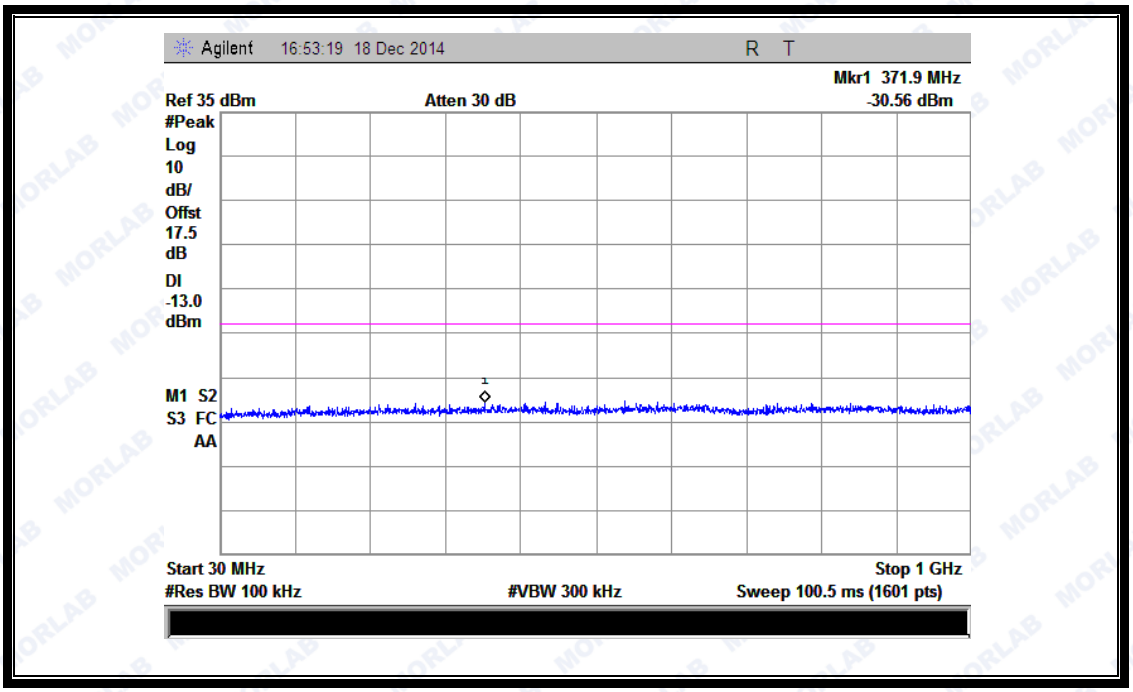

(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

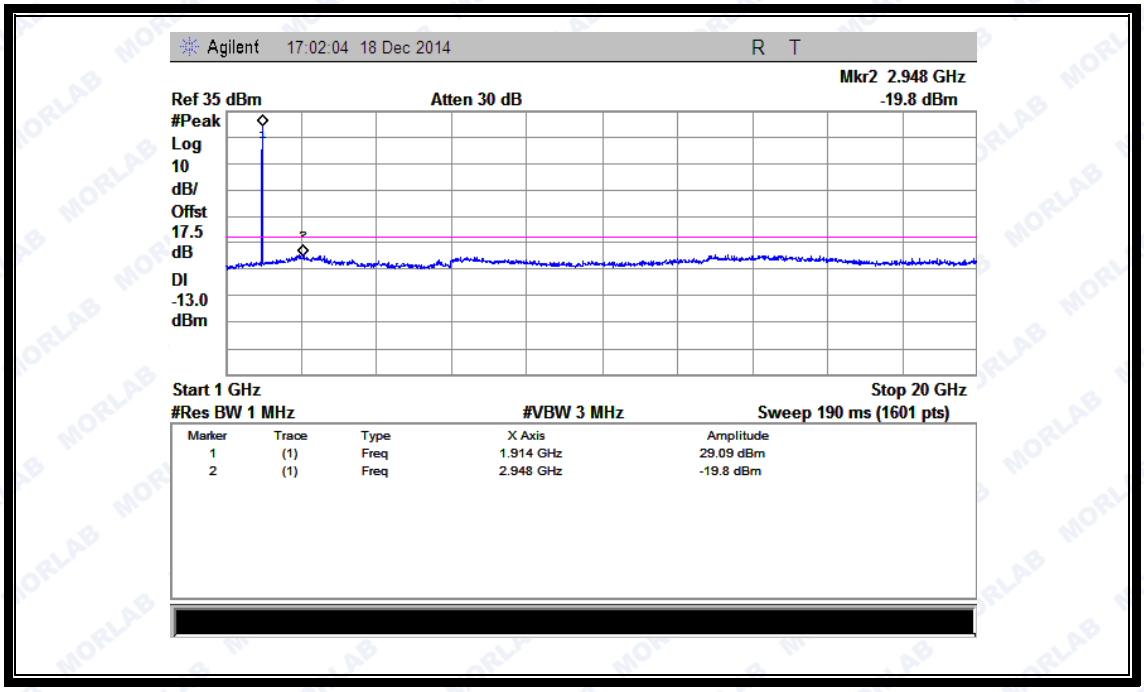

(Plot B3.1: GSM 1900MHz Channel = 810, 1GHz to 20GHz)

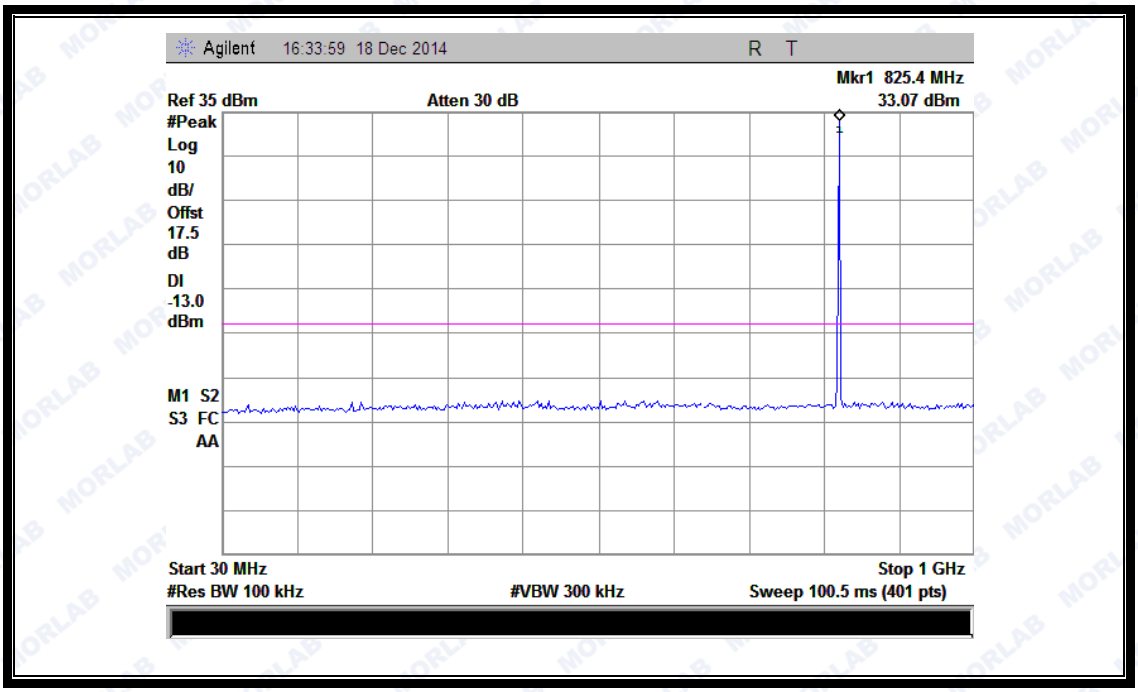

(Plot C1: EDGE 850MHz Channel = 128, 30MHz to 1GHz)

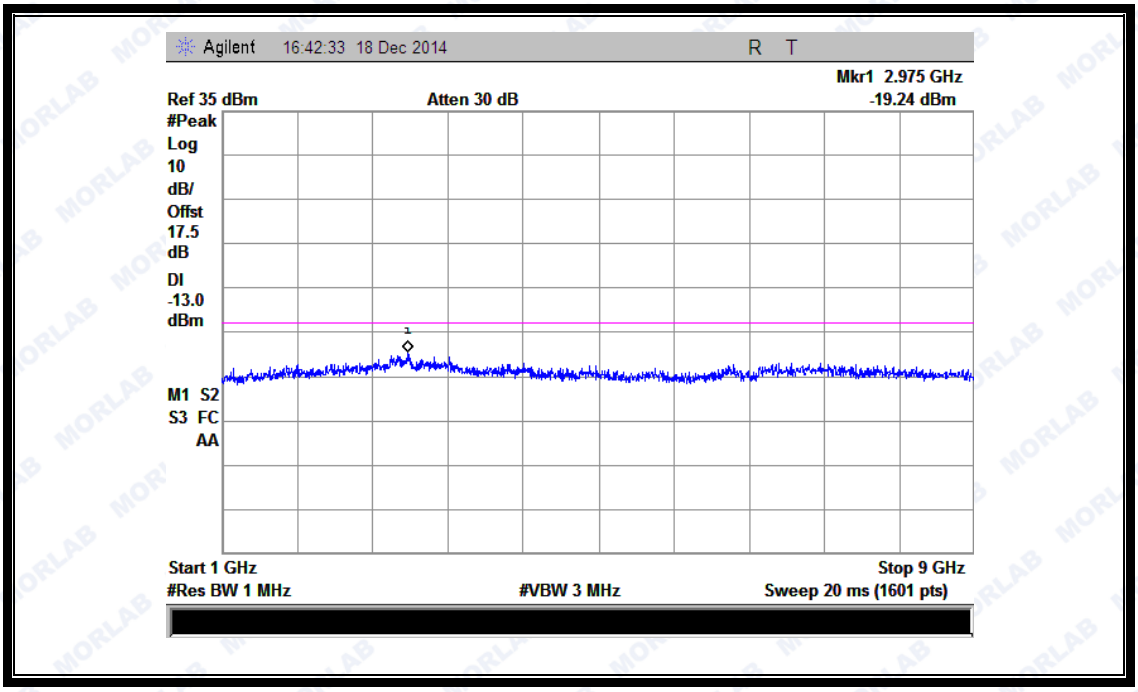

(Plot C1.1: EDGE 850MHz Channel = 128, 1GHz to 9GHz)

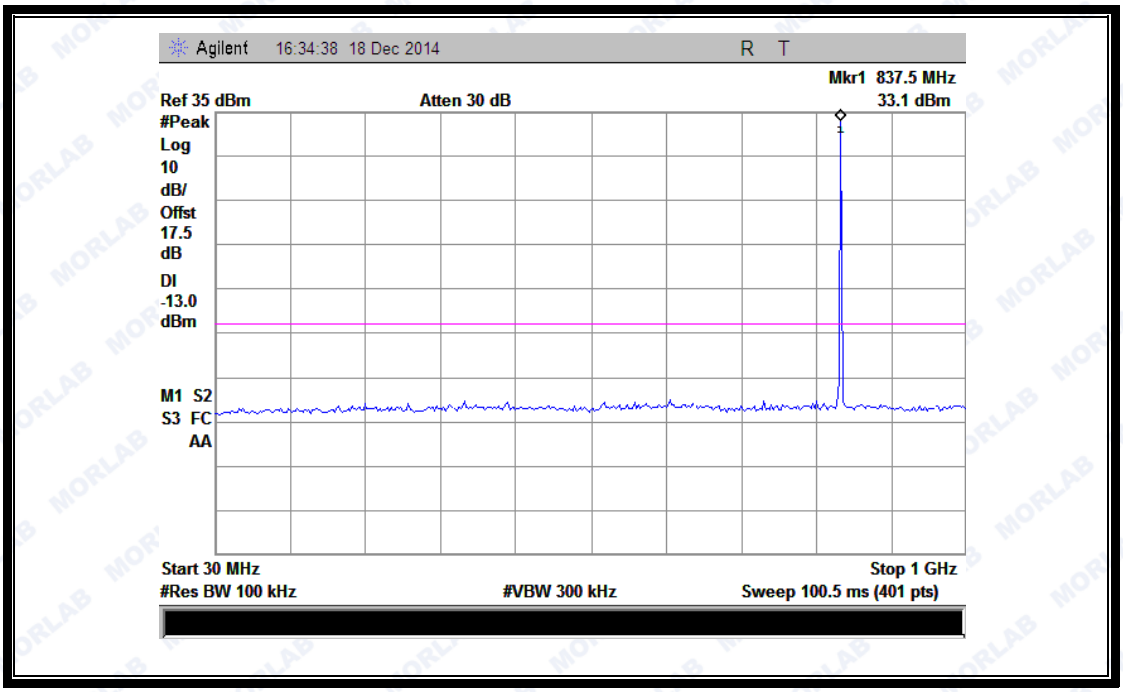

(Plot C2: EDGE 850MHz Channel = 190, 30MHz to 1GHz)

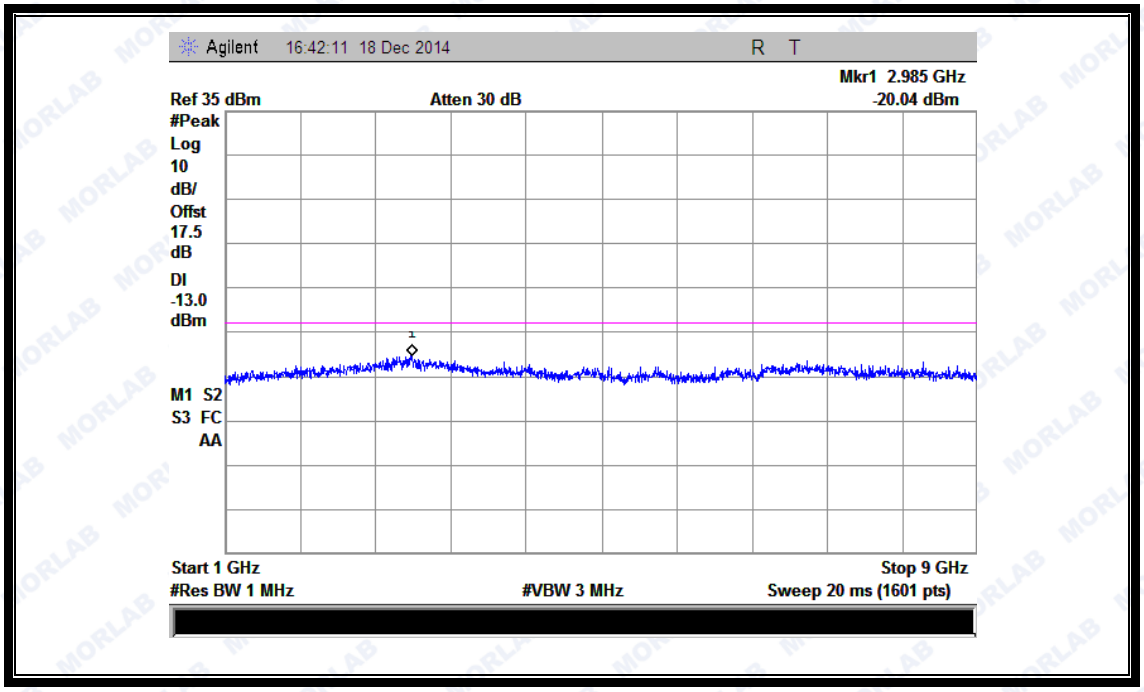

(Plot C2.1: EDGE 850MHz Channel = 190, 1GHz to 9GHz)

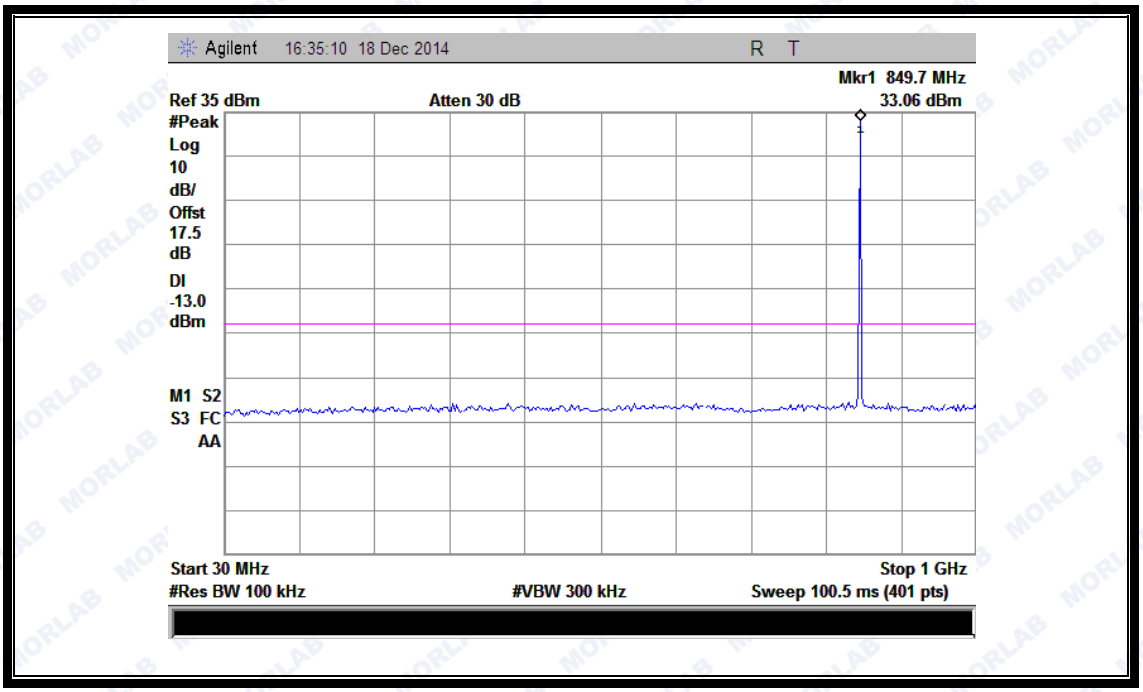

(Plot C3: EDGE 850MHz Channel = 251, 30MHz to 1GHz)

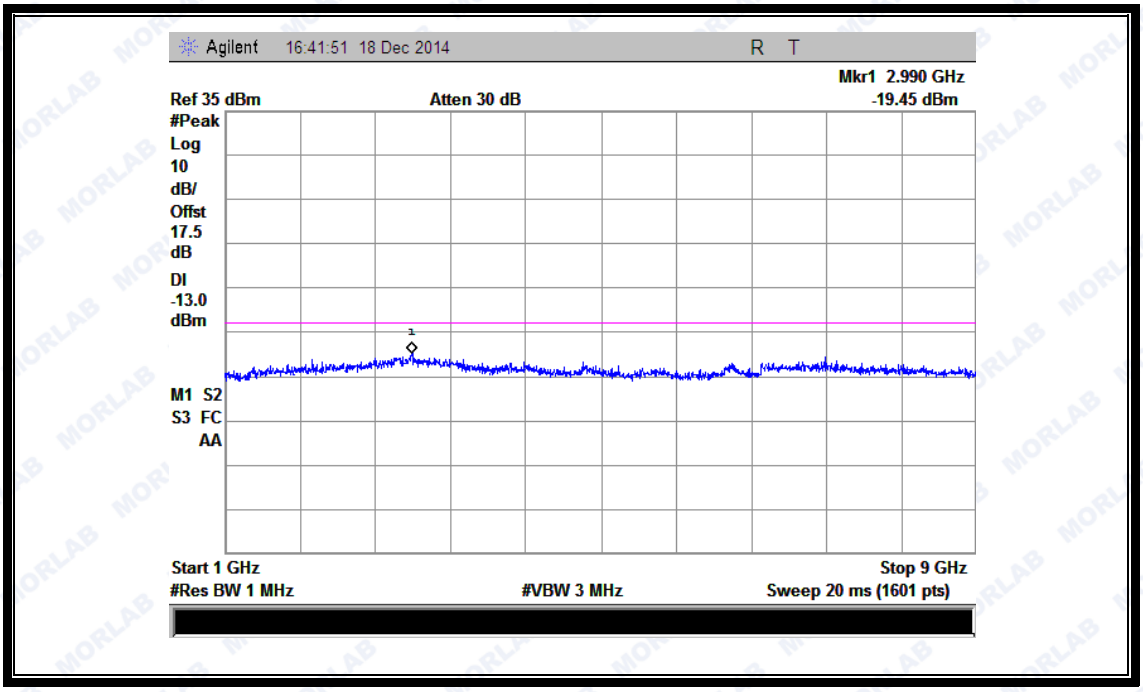

(Plot C3.1: EDGE 850MHz Channel = 251, 1GHz to 9GHz)

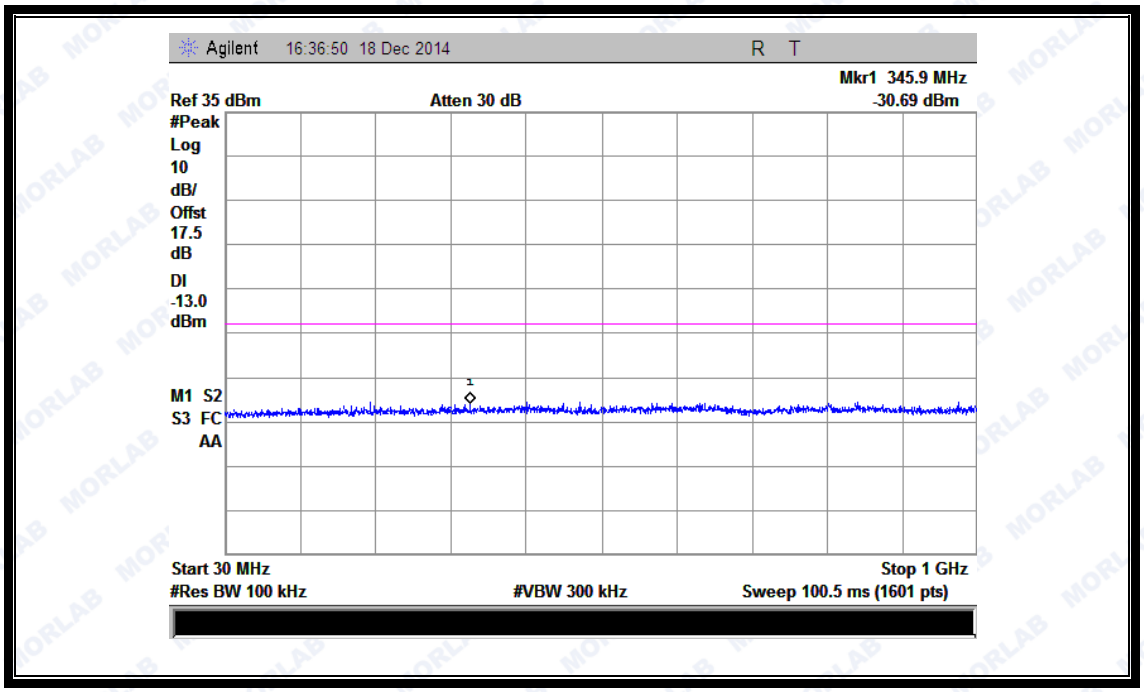

(Plot D1: EDGE 1900MHz Channel = 512, 30MHz to 1GHz)

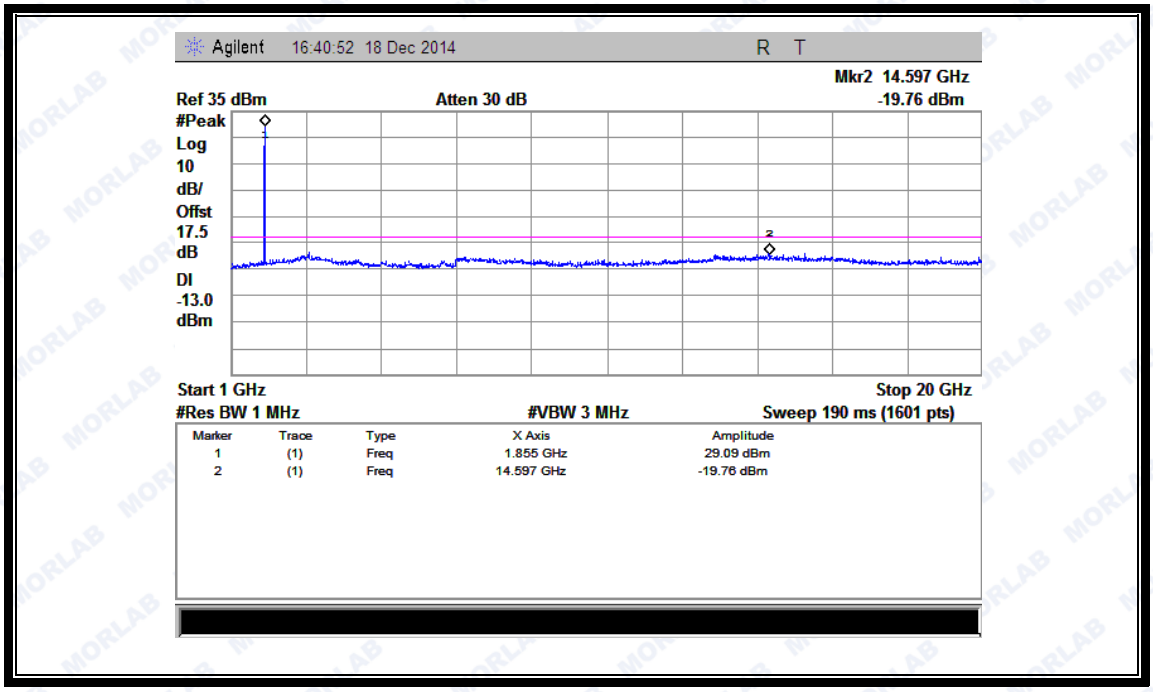

(Plot D1.1: EDGE 1900MHz Channel = 512, 1GHz to 20GHz)

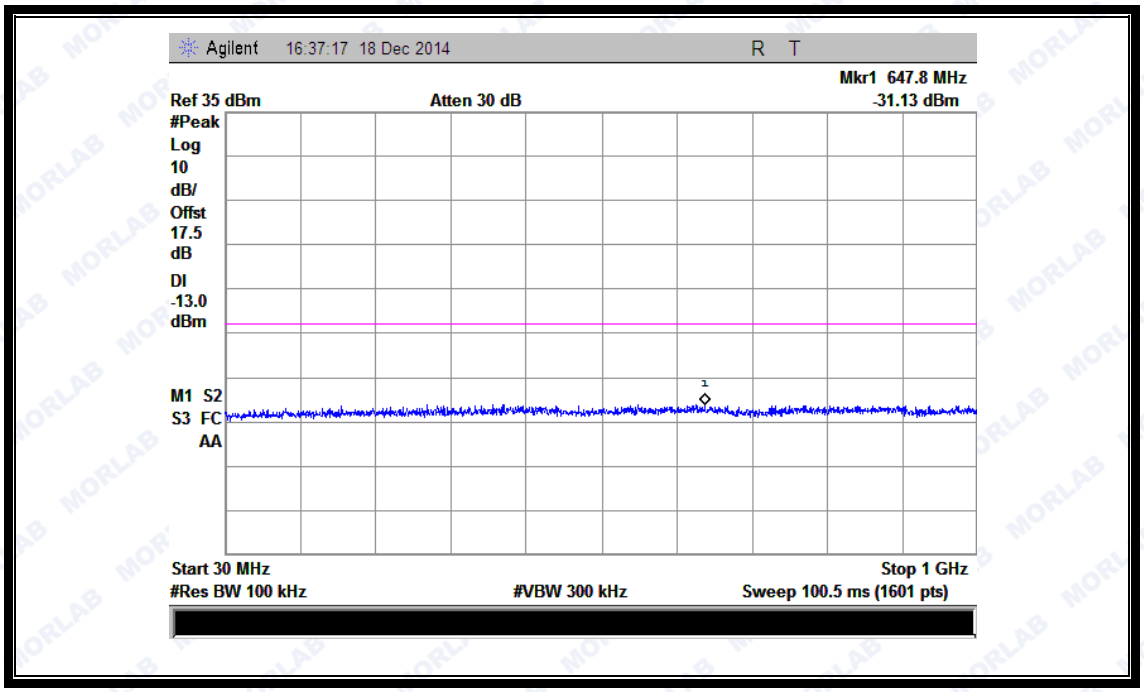

(Plot D2: EDGE 1900MHz Channel = 661, 30MHz to 1GHz)

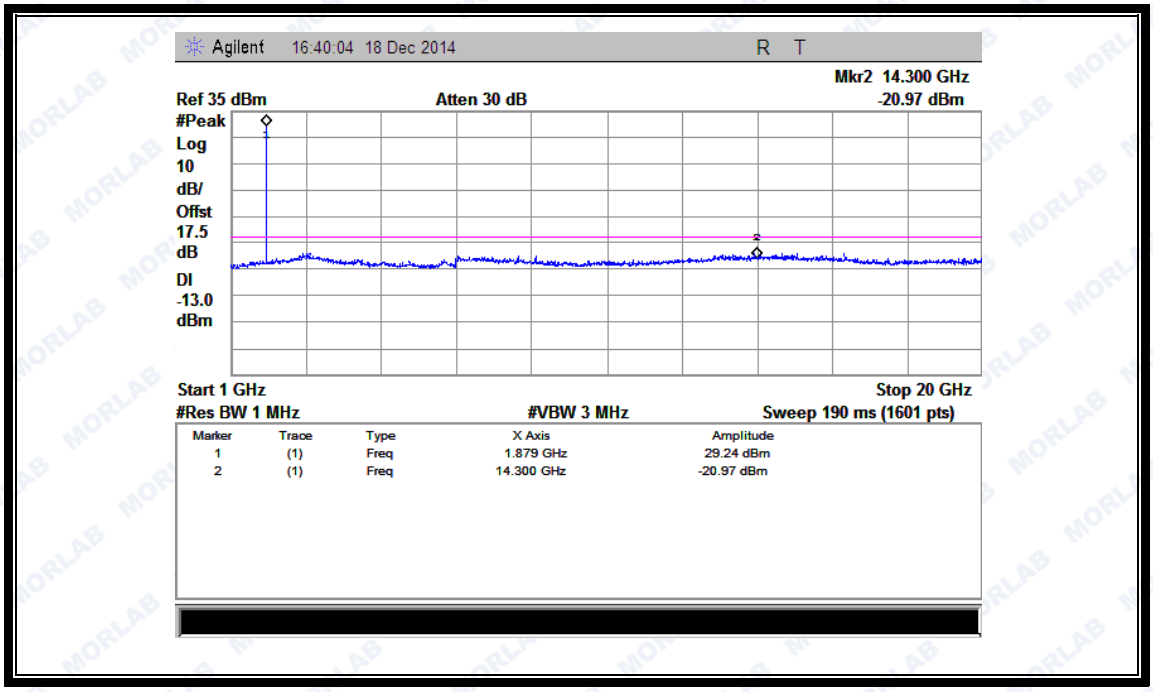

(Plot D2.1: EDGE 1900MHz Channel = 661,1GHz to 20GHz)

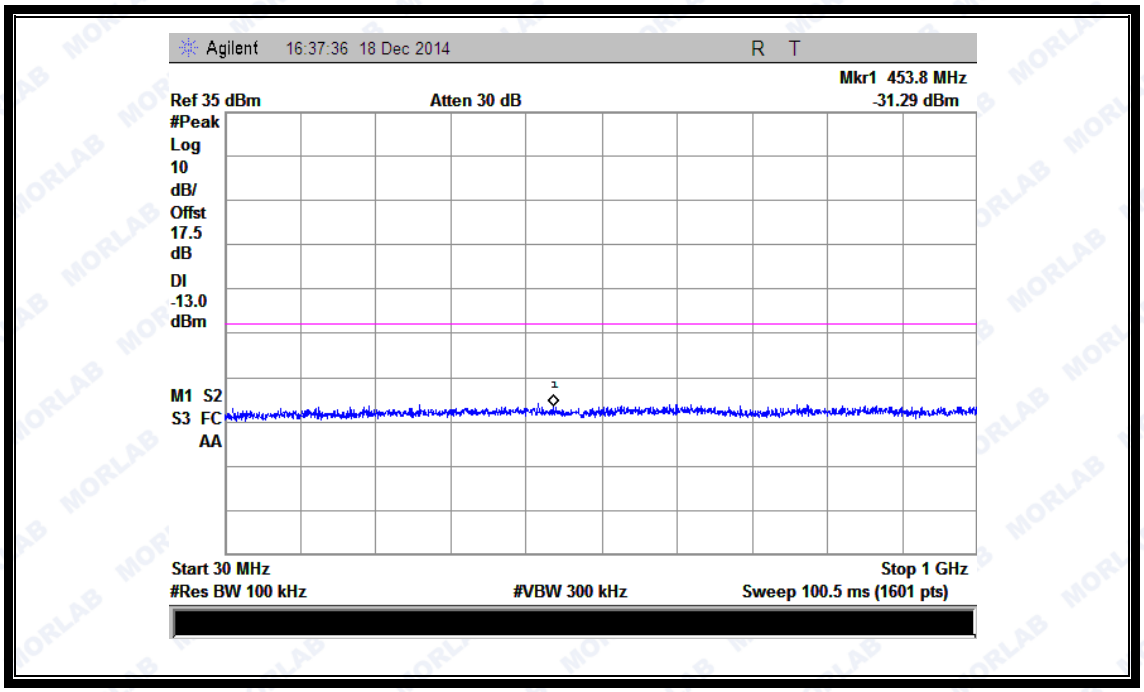

(Plot D3: EDGE 1900MHz Channel = 810, 30MHz to 1GHz)

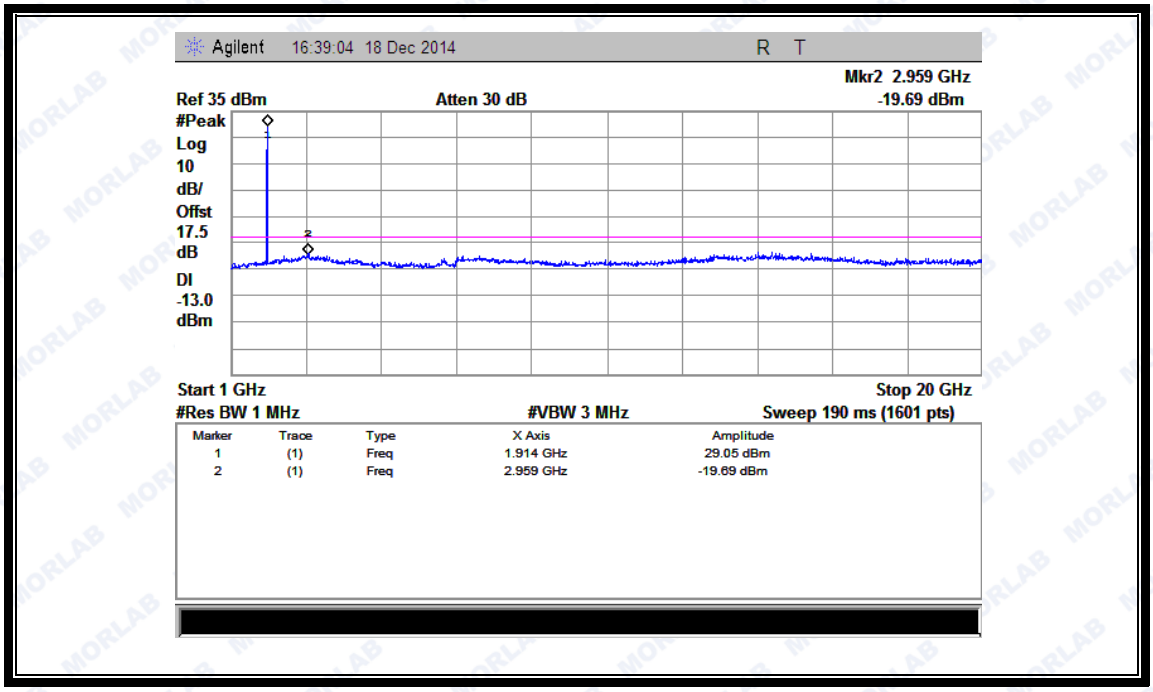

(Plot D3.1: EDGE 1900MHz Channel = 810, 1GHz to 20GHz)

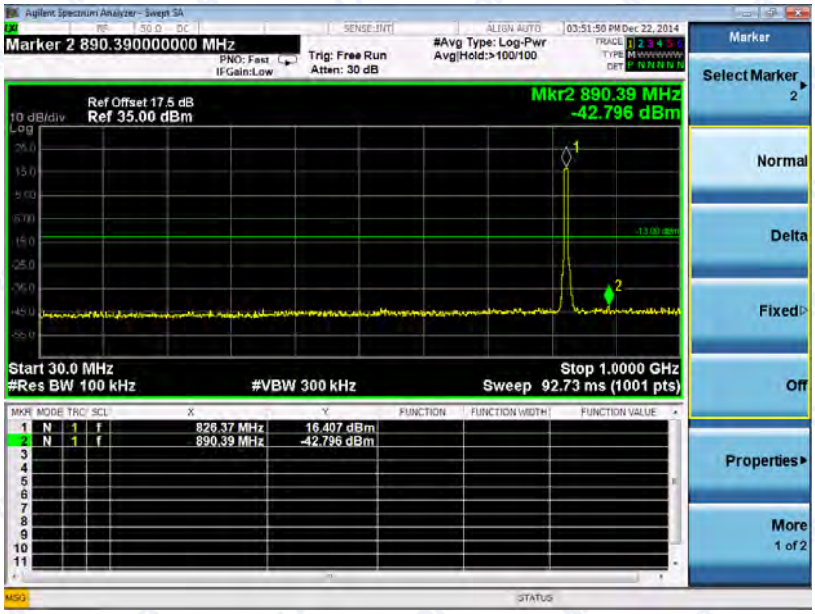

(Plot E1: WCDMA850MHz Channel = 4132, 30MHz to 1GHz)

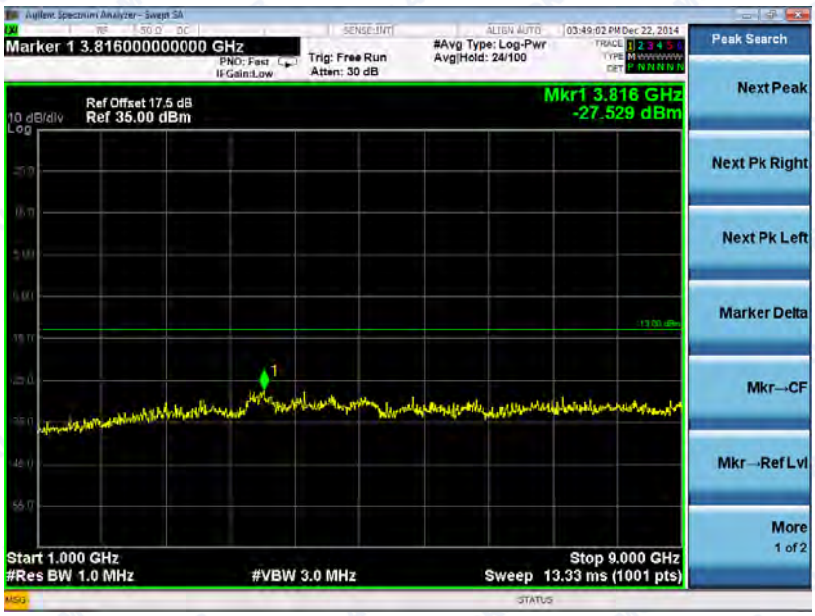

(Plot E1.1: WCDMA850MHz Channel = 4132, 1GHz to 9GHz)

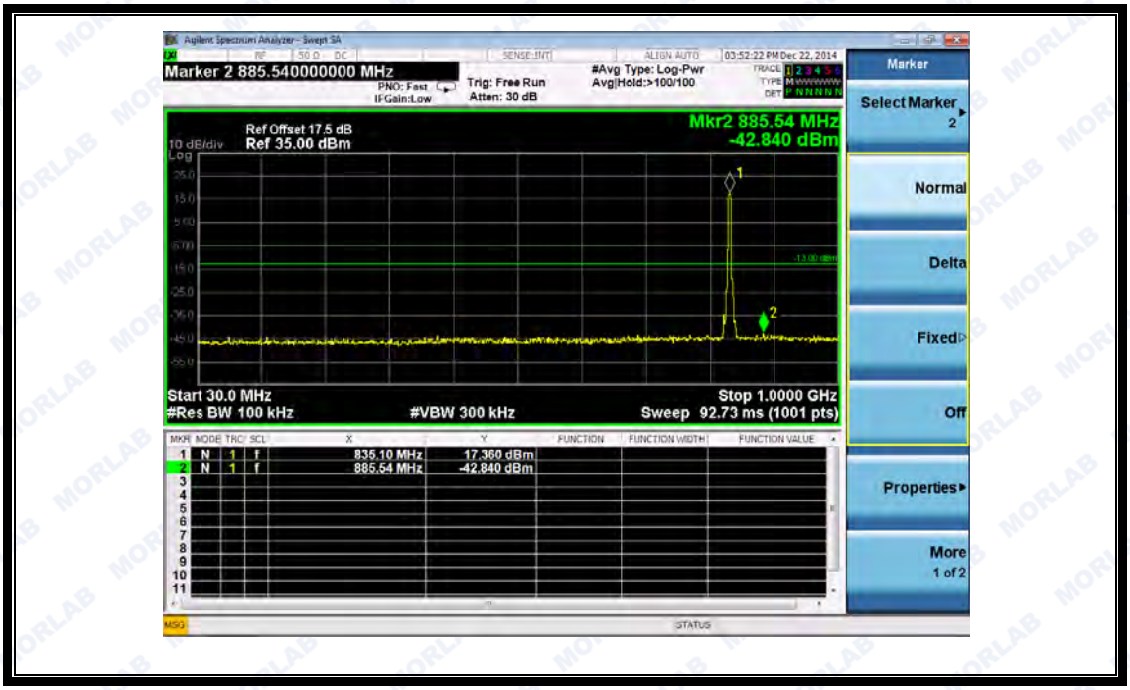

(Plot E2: WCDMA850MHz Channel = 4175, 30MHz to 1GHz)

(Plot E2.1: WCDMA850MHz Channel = 4175, 1GHz to 9GHz)

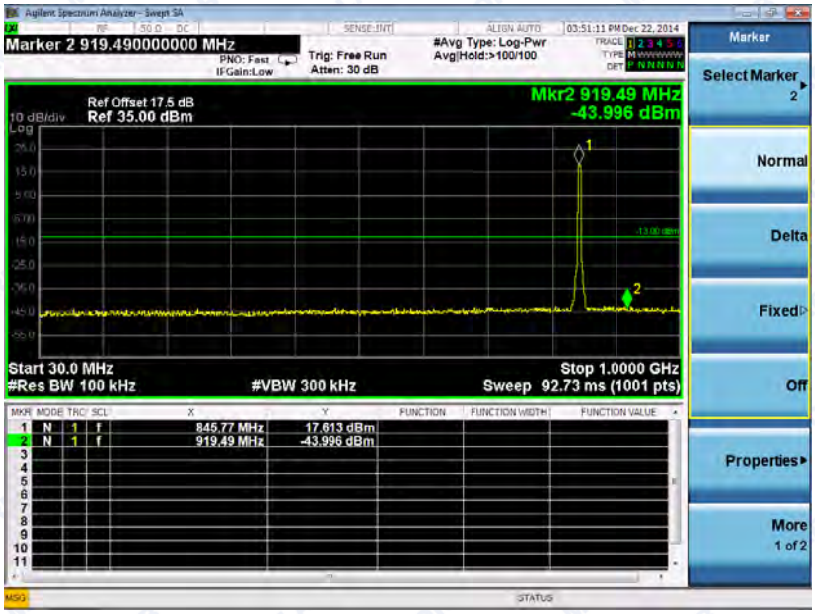

(Plot E3: WCDMA850MHz Channel = 4233, 30MHz to 1GHz)

(Plot E3.1: WCDMA850MHz Channel = 4233, 1GHz to 9GHz)

(Plot F1:WCDMA1900MHz Channel = 9262, 30MHz to 1GHz)

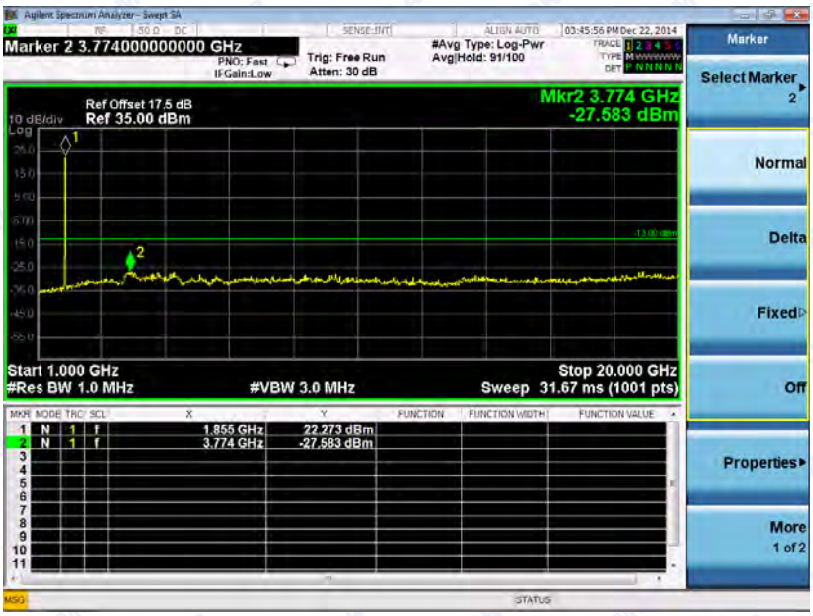

(Plot F1.1: WCDMA1900MHz Channel = 9262, 1GHz to 20GHz)

(Plot F2:WCDMA1900MHz Channel = 9400, 30MHz to 1GHz)

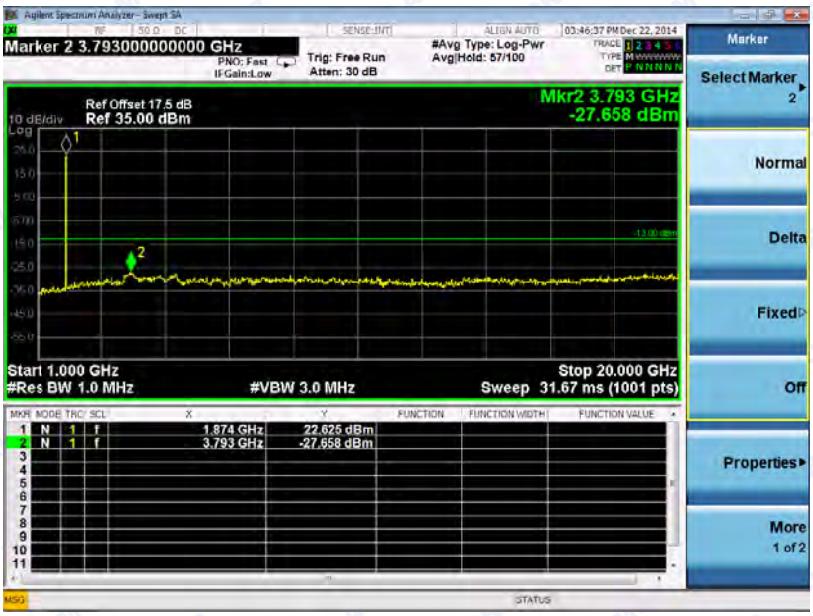

(Plot F2.1: WCDMA1900MHz Channel = 9400, 1GHz to 20GHz)

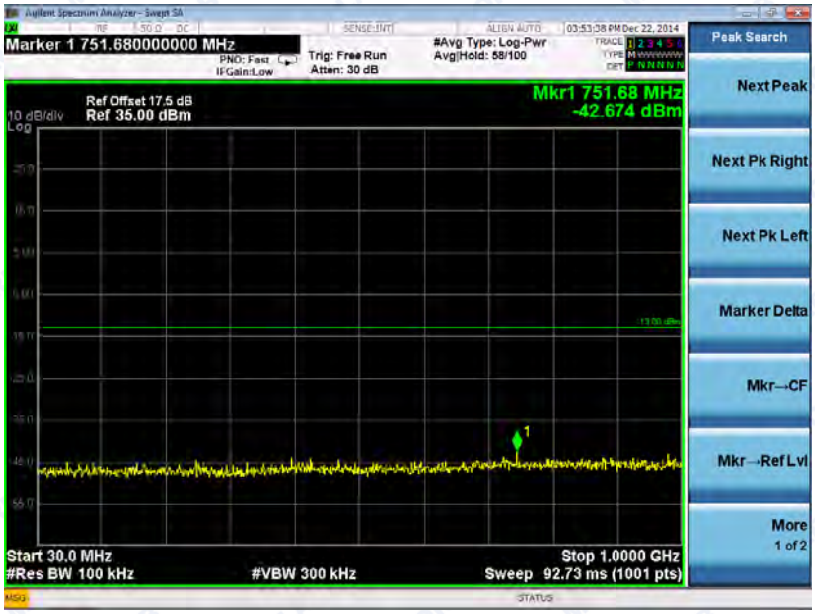

(Plot F3:WCDMA1900MHz Channel = 9538, 30MHz to 1GHz)

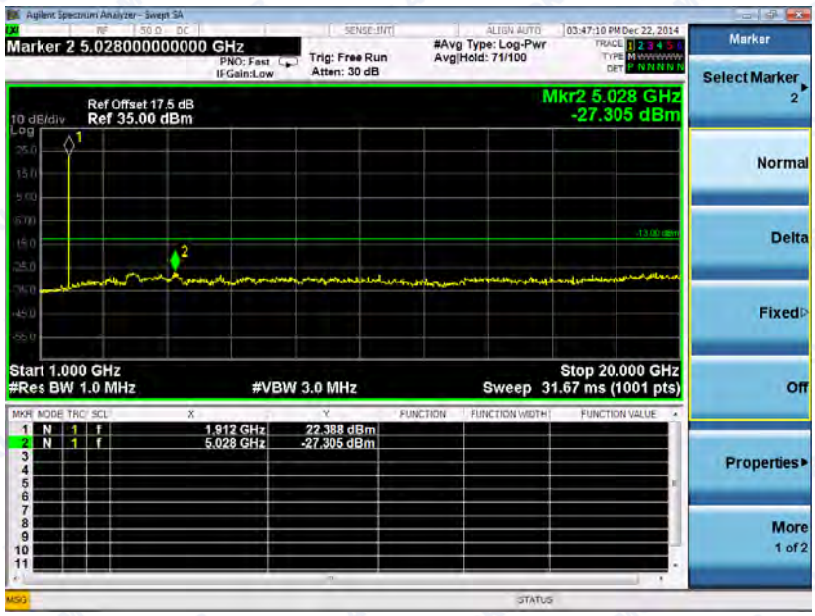

(Plot F3.1: WCDMA1900MHz Channel = 9538 1GHz to 20GHz)

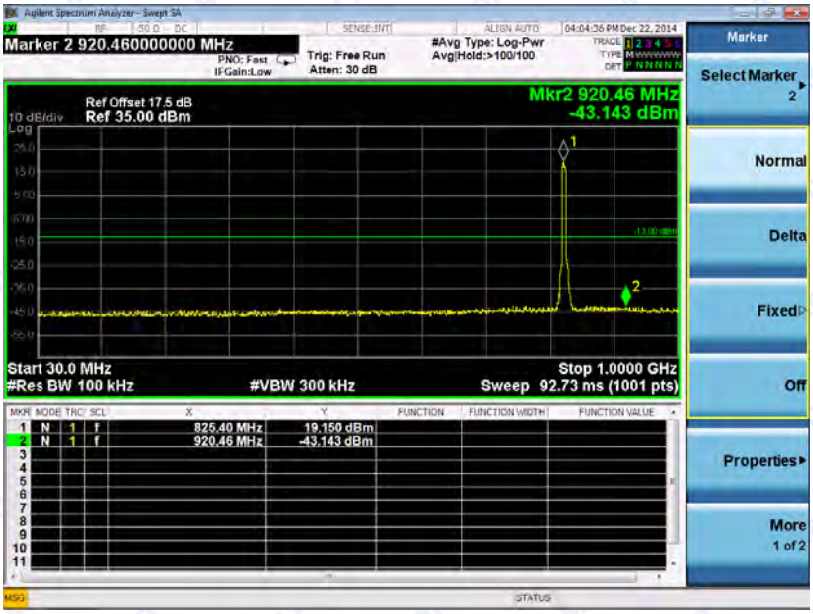

(Plot G1: HSDPA 850MHz Channel = 4132, 30MHz to 1GHz)

(Plot G1.1: HSDPA 850MHz Channel = 4132, 1GHz to 9GHz)

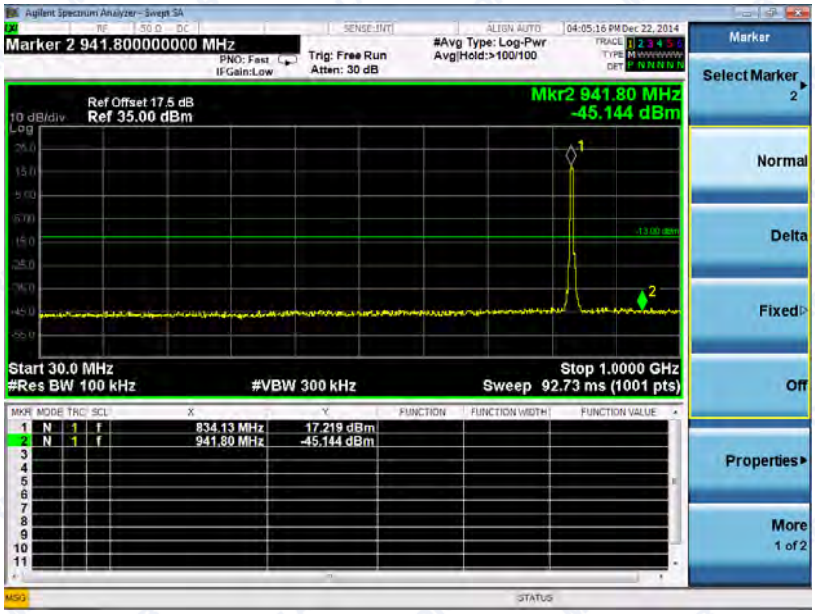

(Plot G2: HSDPA 850MHz Channel = 4175, 30MHz to 1GHz)

(Plot G2.1: HSDPA 850MHz Channel = 4175, 1GHz to 9GHz)

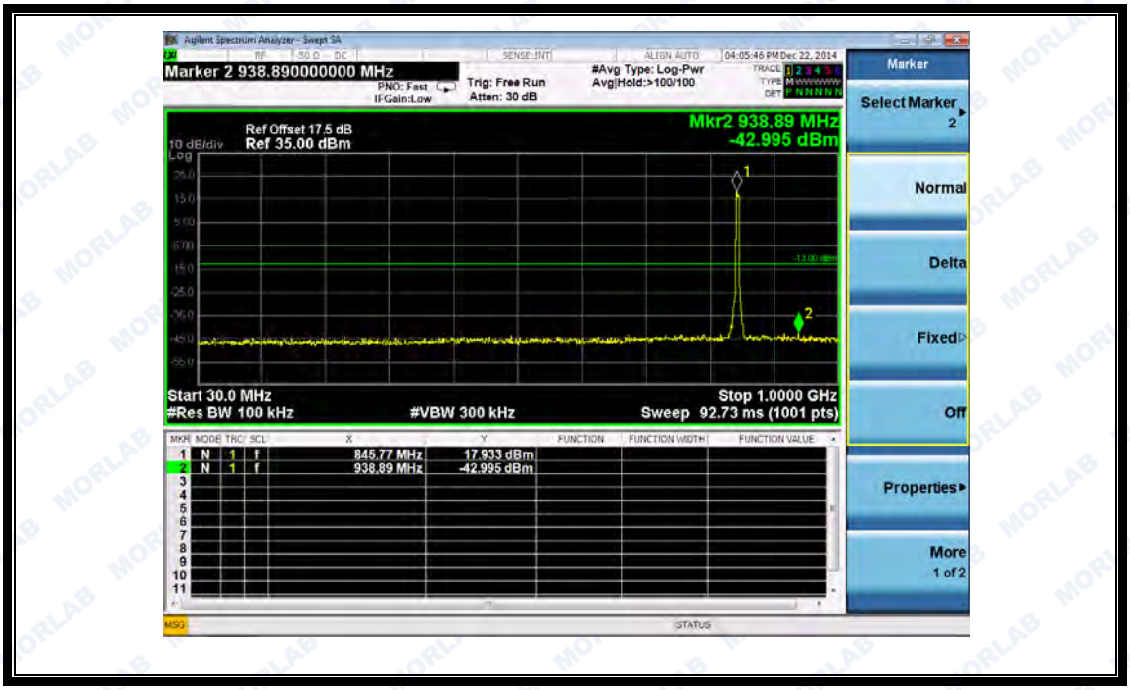

(Plot G3: HSDPA850MHz Channel = 4233, 30MHz to 1GHz)

(Plot G3.1: HSDPA850MHz Channel = 4233, 1GHz to 9GHz)

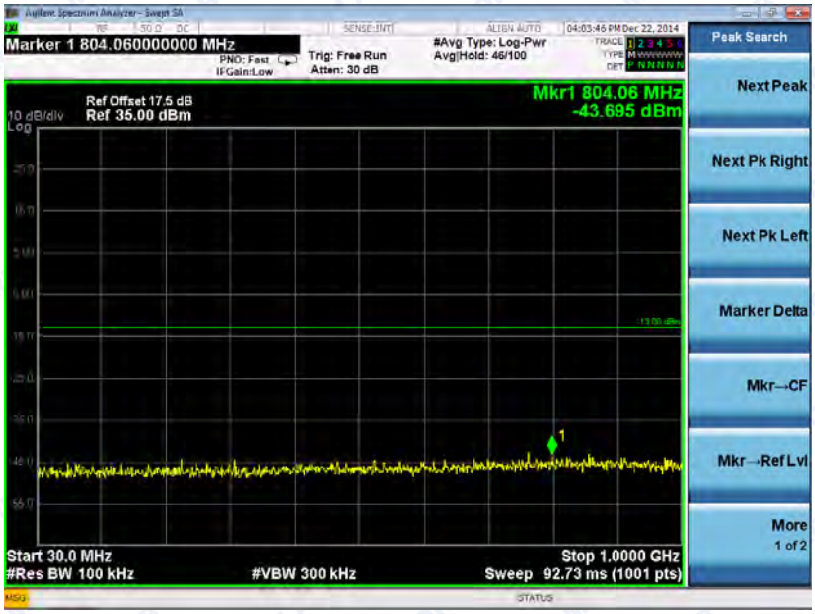

(Plot H1: HSDPA1900MHz Channel = 9262, 30MHz to 1GHz)

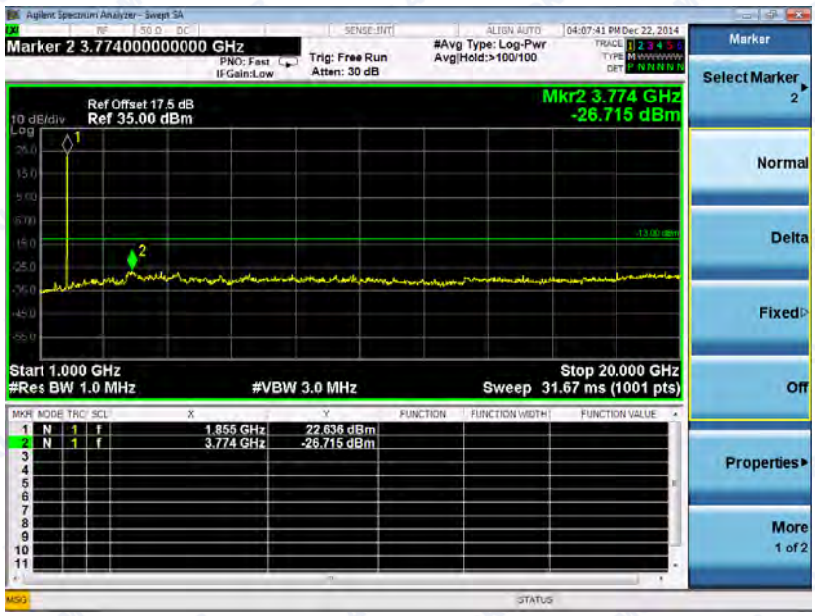

(Plot H1.1: HSDPA1900MHz Channel = 9262, 1GHz to 20GHz)

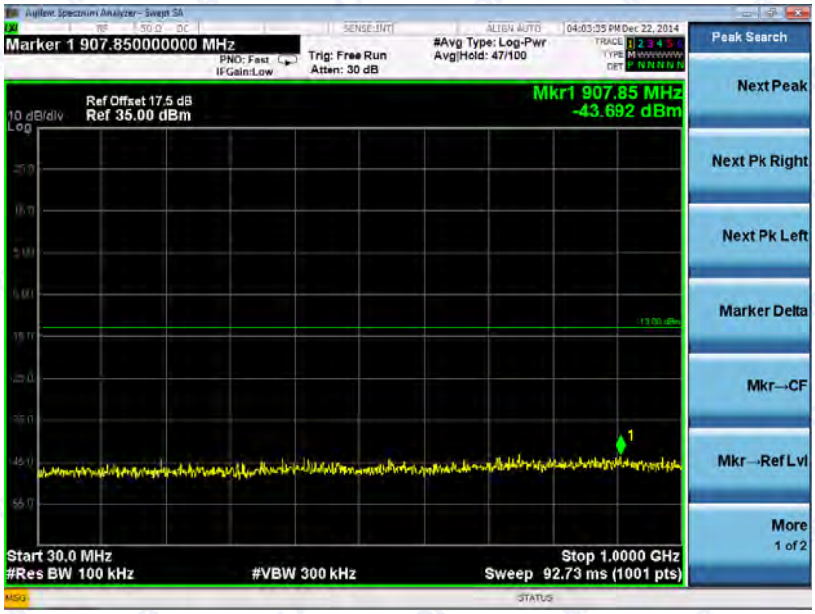

(Plot H2: HSDPA1900MHz Channel = 9400, 30MHz to 1GHz)

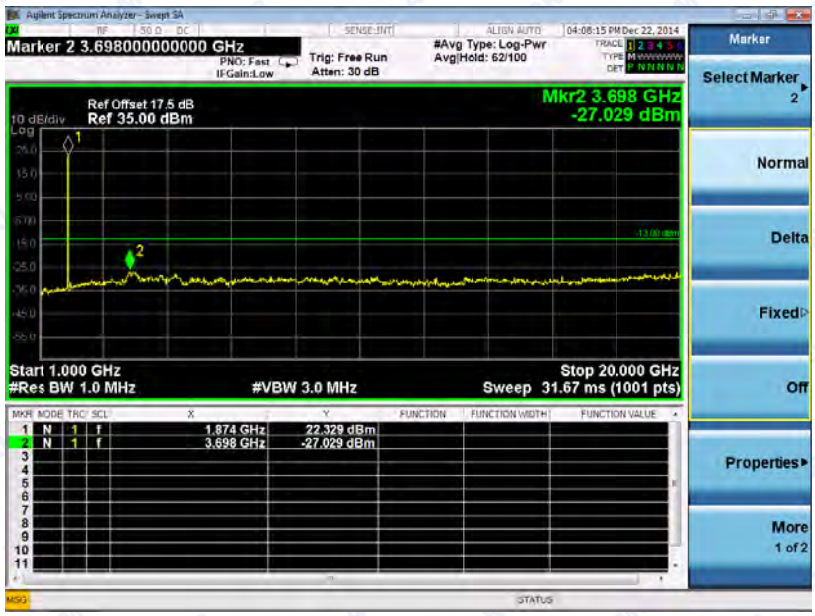

(Plot H2.1: HSDPA1900MHz Channel = 9400, 1GHz to 20GHz)

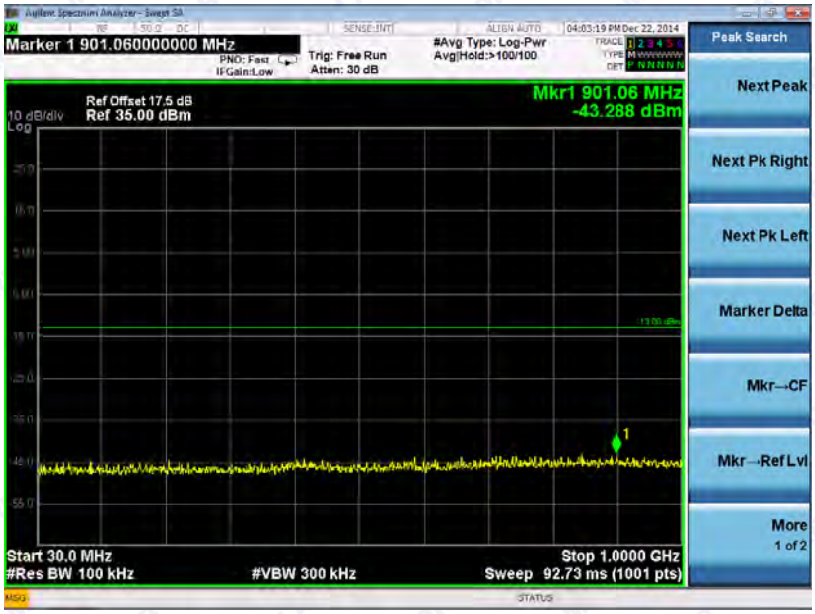

(Plot H3: HSDPA1900MHz Channel = 9538, 30MHz to 1GHz)

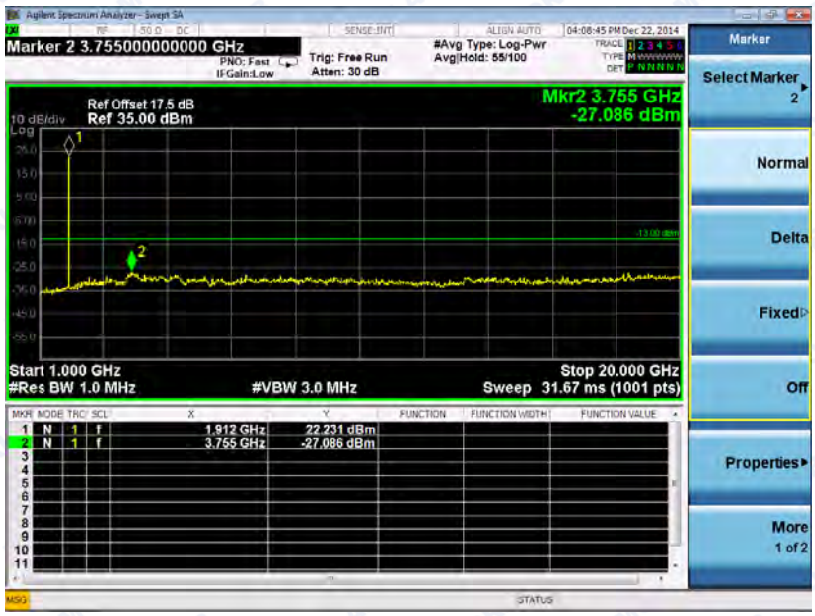

(Plot H3.1: HSDPA1900MHz Channel = 9538 1GHz to 20GHz)

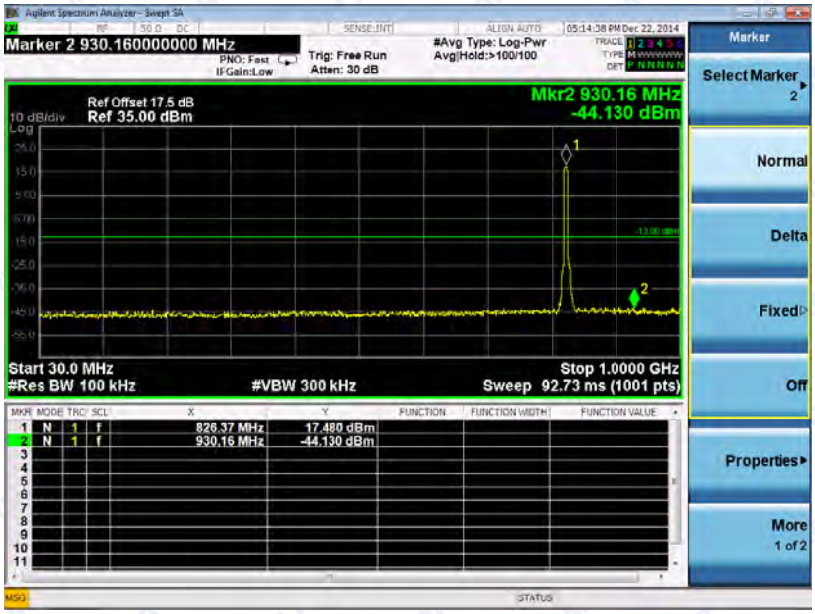

(Plot I 1:HSUPA 850MHz Channel = 4132, 30MHz to 1GHz)

(Plot I1.1: HSUPA 850MHz Channel = 4132, 1GHz to 9GHz)

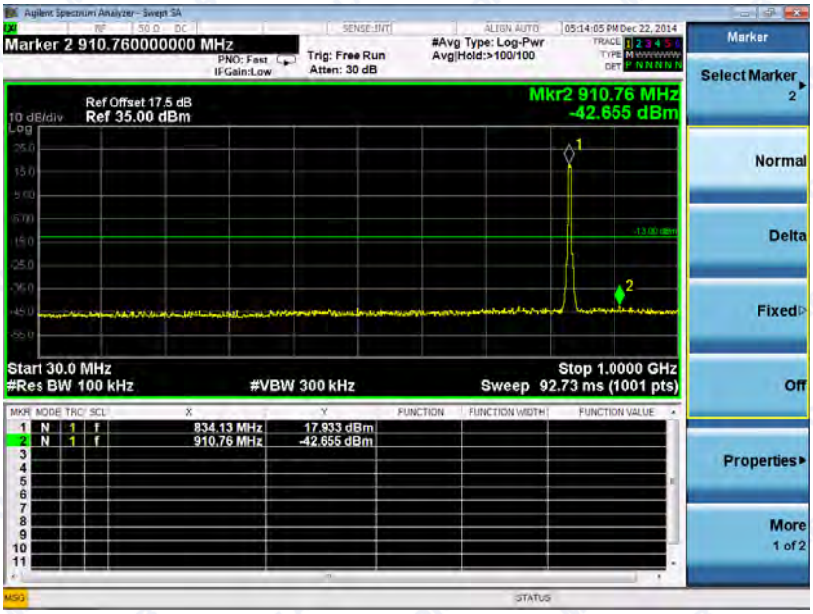

(Plot I 2:HSUPA 850MHz Channel = 4175, 30MHz to 1GHz)

(Plot I2.1: HSUPA 850MHz Channel = 4175, 1GHz to 9GHz)

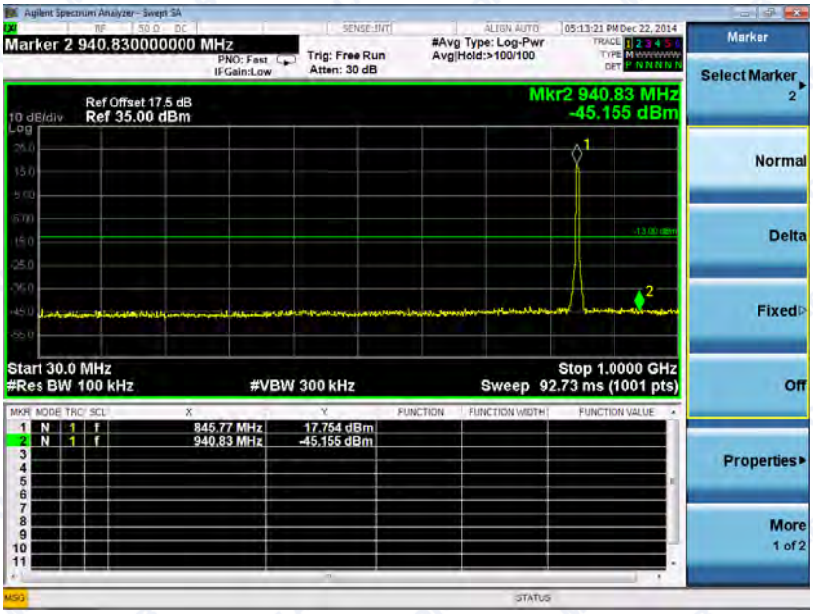

(Plot I 3: HSUPA850MHz Channel = 4233, 30MHz to 1GHz)

(Plot I3.1: HSUPA850MHz Channel = 4233, 1GHz to 9GHz)

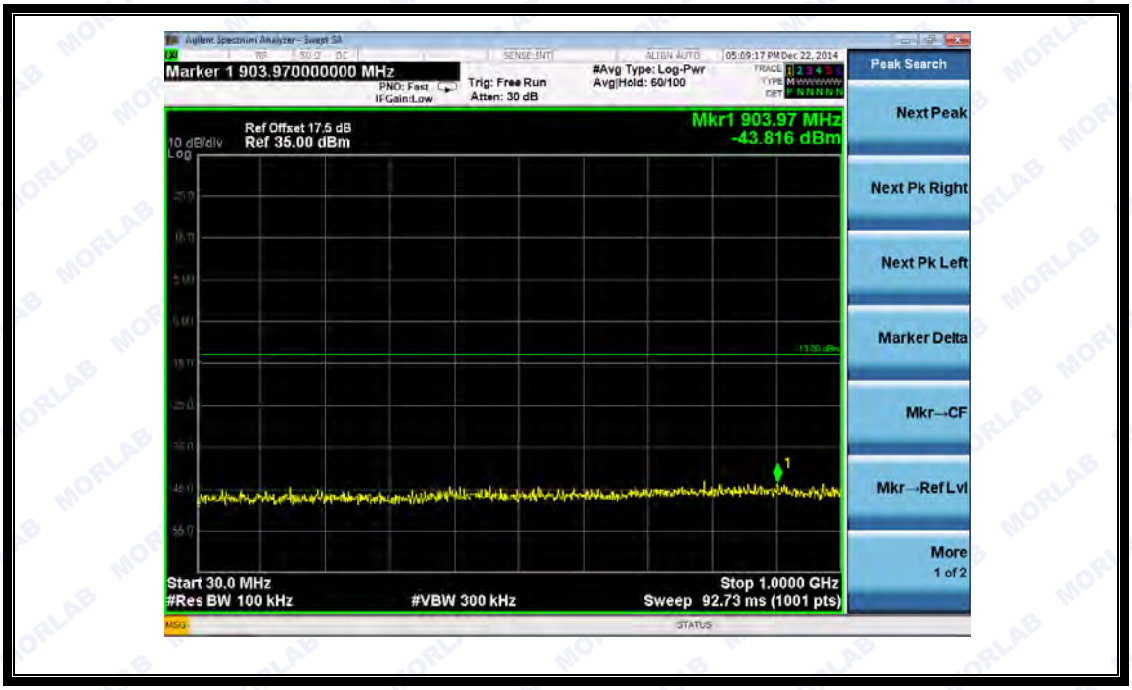

(Plot J 1: HSUPA1900MHz Channel = 9262, 30MHz to 1GHz)

(Plot J1.1: HSUPA1900MHz Channel = 9262, 1GHz to 20GHz)

(Plot J 2: HSUPA1900MHz Channel = 9400, 30MHz to 1GHz)

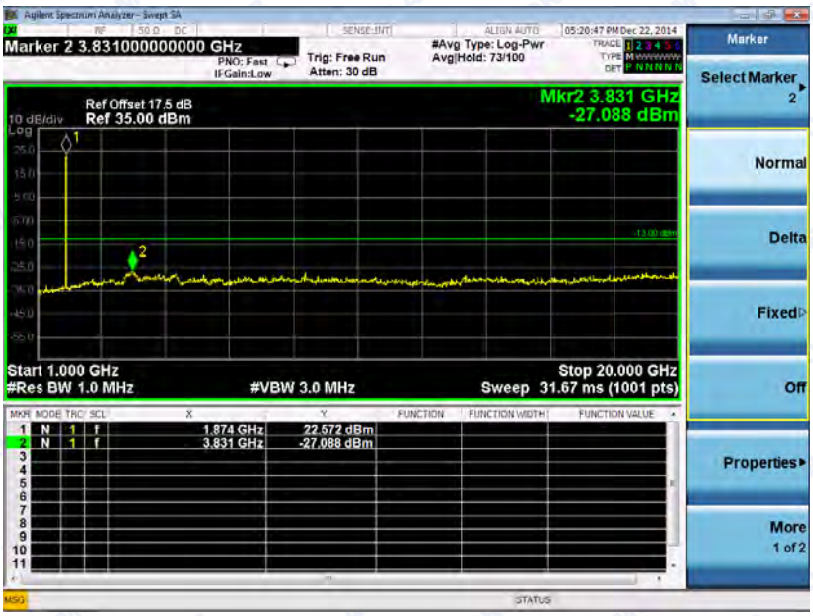

(Plot J2.1: HSUPA1900MHz Channel = 9400, 1GHz to 20GHz)

(Plot J 3: HSUPA1900MHz Channel = 9538, 30MHz to 1GHz)

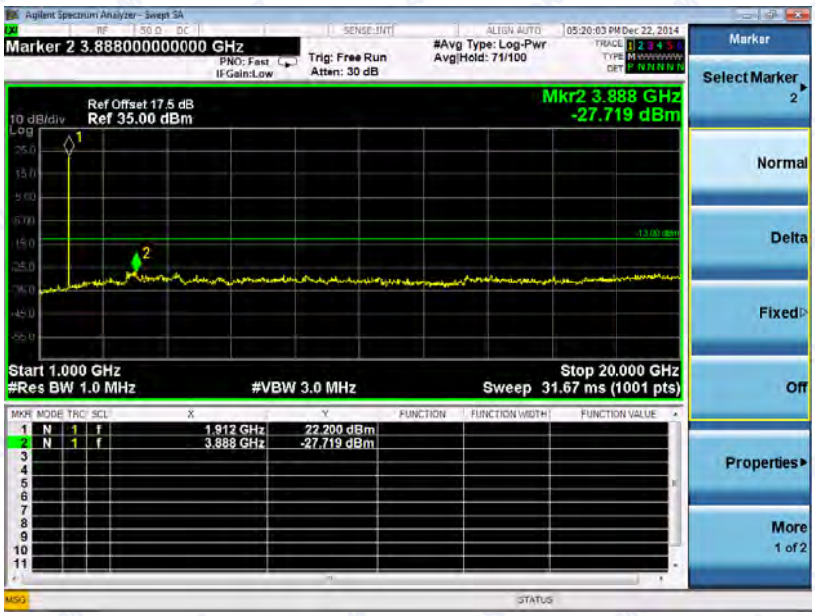

(Plot J3.1: HSUPA1900MHz Channel = 9538 1GHz to 20GHz)

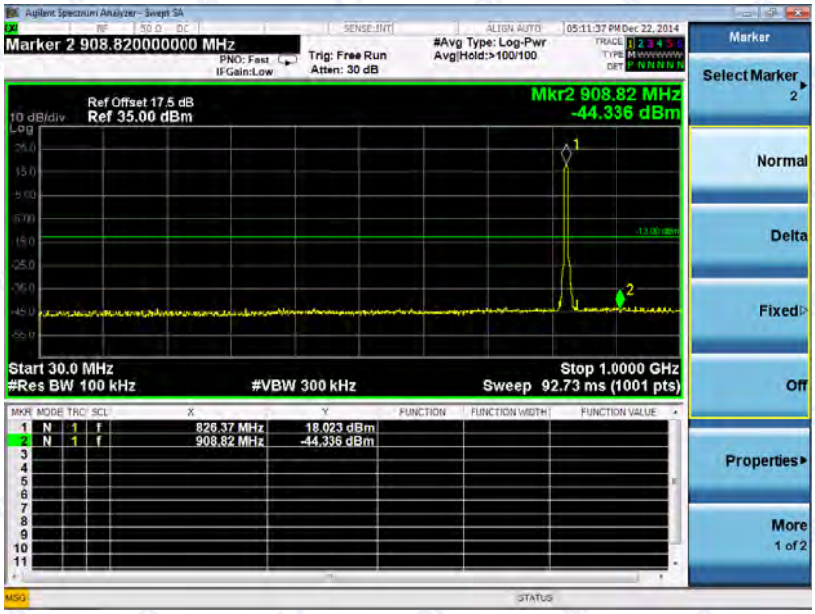

(Plot K 1: HSPA+ 850MHz Channel = 4132, 30MHz to 1GHz)

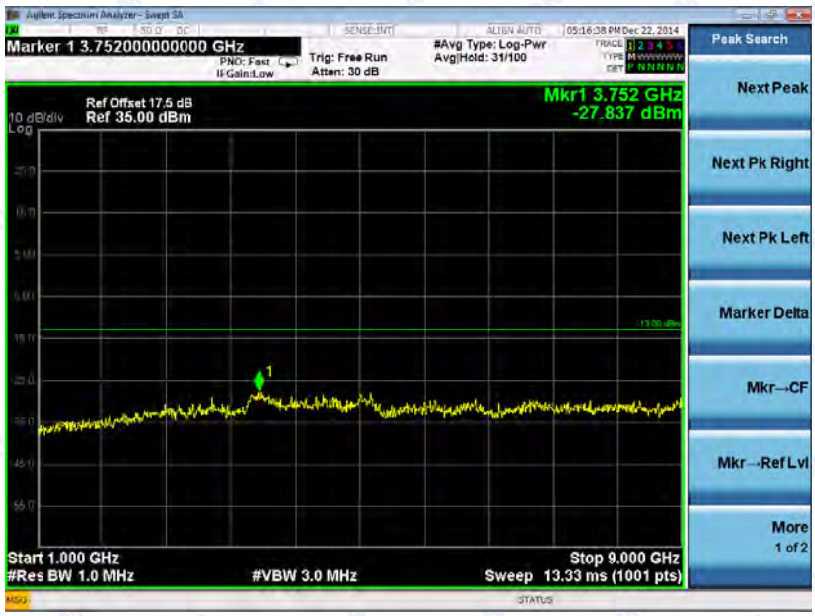

(Plot K1.1: HSPA+ 850MHz Channel = 4132, 1GHz to 9GHz)

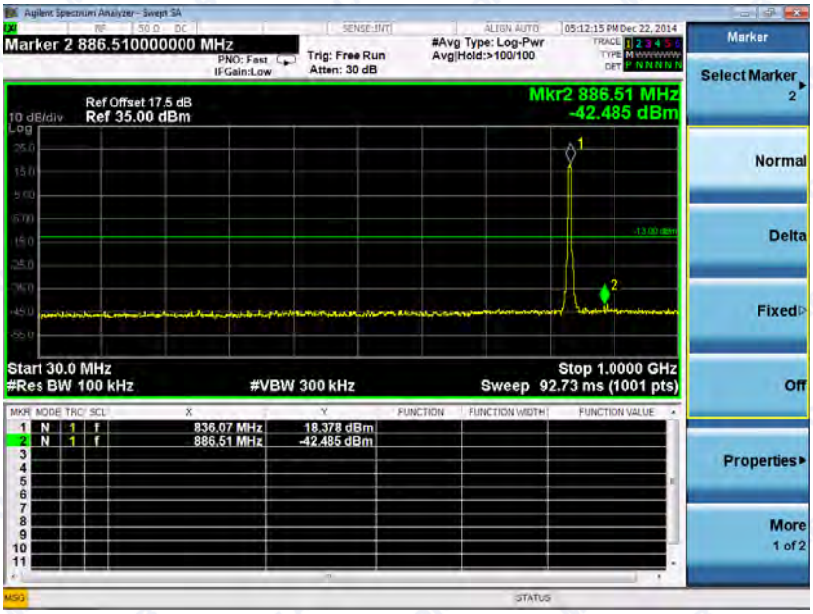

(Plot K 2: HSPA+ 850MHz Channel = 4175, 30MHz to 1GHz)

(Plot K2.1: HSPA+ 850MHz Channel = 4175, 1GHz to 9GHz)

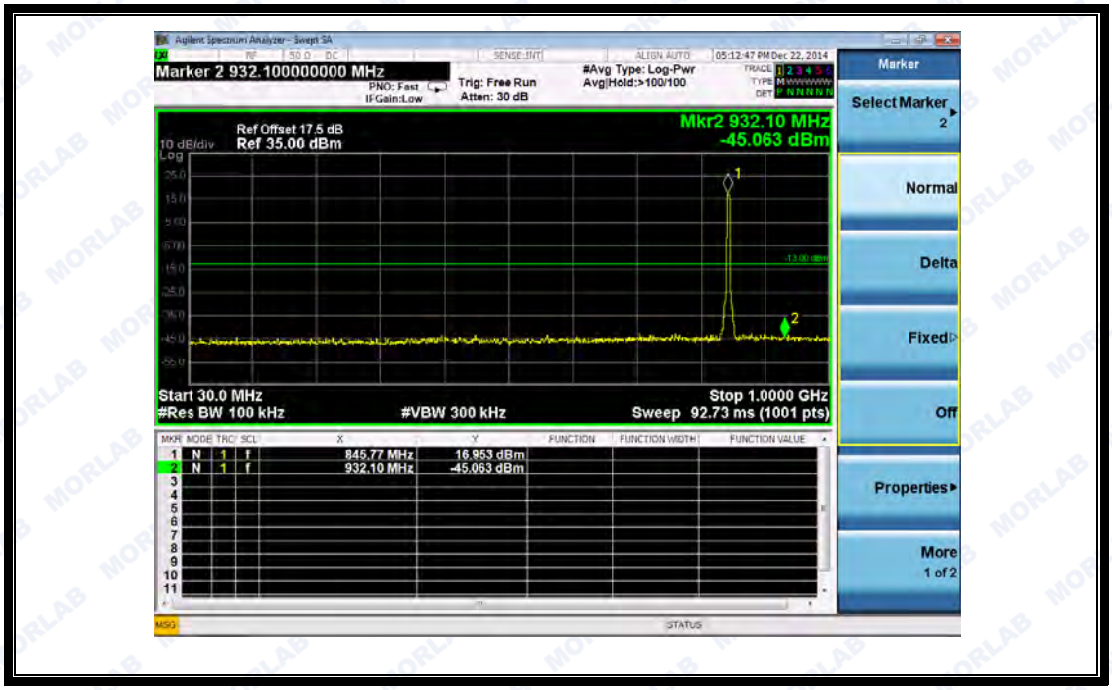

(Plot K 3: HSPA+ 850MHz Channel = 4233, 30MHz to 1GHz)

(Plot K3.1: HSPA+ 850MHz Channel = 4233, 1GHz to 9GHz)

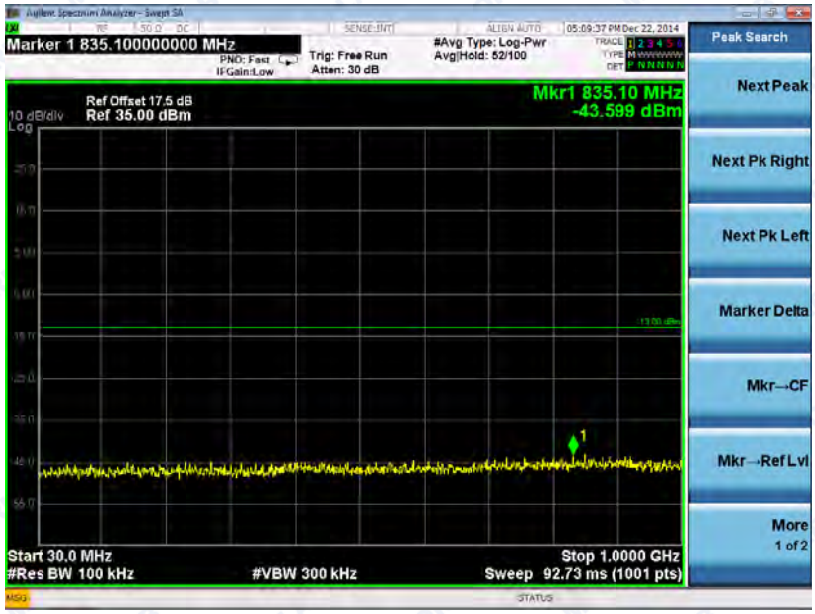

(Plot K 1: HSPA+ 1900MHz Channel = 9262, 30MHz to 1GHz)

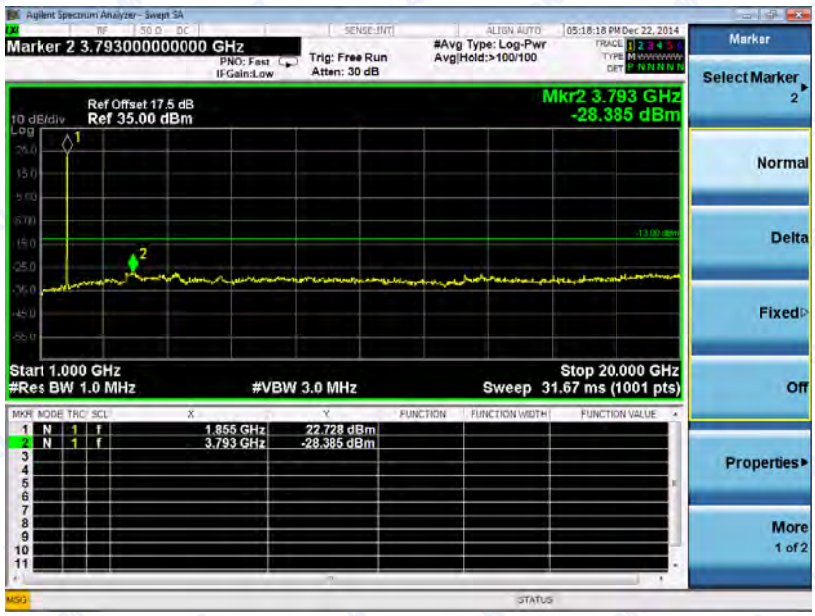

(Plot K1.1: HSPA+ 1900MHz Channel = 9262, 1GHz to 20GHz)

(Plot K 2: HSPA+ 1900MHz Channel = 9400, 30MHz to 1GHz)

(Plot K2.1: HSPA+ 1900MHz Channel = 9400, 1GHz to 20GHz)

(Plot K 3: HSPA+ 1900MHz Channel = 9538, 30MHz to 1GHz)

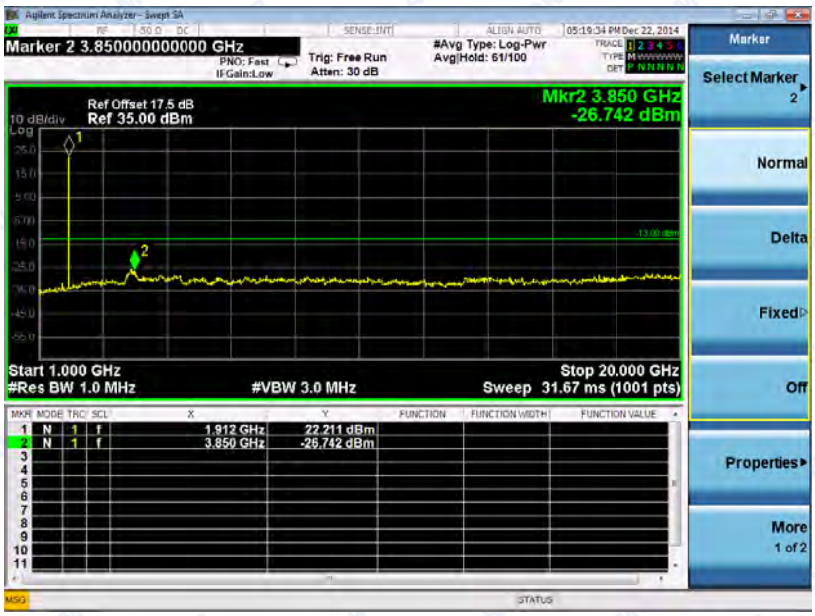

(Plot K3.1: HSPA+ 1900MHz Channel = 9538 1GHz to 20GHz)

2.6 Band Edge

2.6.1 Requirement

According to FCC section 22.917(b) and FCC section 24.238(b) in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

2.6.2 Test Description

See section 2.1.2 of this report.

2.6.3 Test Result

The lowest and highest channels are tested to verify the band edge emissions.

1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-18.83	Plat A	-13	PASS
	251	848.8	-17.5	Plot B		PASS
GSM 1900MHz	512	1850.2	-21.95	Plat C	-13	PASS
	810	1909.8	-22.75	Plot D		PASS
EDGE 850MHz	128	824.2	-17.2	Plat E	-13	PASS
	251	848.8	-17.95	Plot F		PASS
EDGE 1900MHz	512	1850.2	-22.44	Plat G	-13	PASS
	810	1909.8	-22.37	Plot H		PASS
WCDMA 850MHz	4132	826.4	-31.095	Plat I	-13	PASS
	4233	846.6	-29.657	Plot J		PASS
WCDMA 1900MHz	9262	1852.4	-30.665	Plat K	-13	PASS
	9538	1907.6	-25.726	Plot L		PASS
HSDPA 850MHz	4132	826.4	-31.653	Plat M	-13	PASS
	4233	846.6	-30.760	Plot N		PASS
HSDPA 1900MHz	9262	1852.4	-30.360	Plat O	-13	PASS
	9538	1907.6	-26.271	Plot P		PASS
HSUPA 850MHz	4132	826.4	-30.803	Plat Q	-13	PASS
	4233	846.6	-29.860	Plot R		PASS
HSUPA	9262	1852.4	-30.772	Plat S	-13	PASS

1900MHz	9538	1907.6	-26.085	Plot T		PASS
HSPA+ 850MHz	4132	826.4	-31.032	Plat U	-13	PASS
	4233	846.6	-30.206	Plot V		PASS
HSPA+ 1900MHz	9262	1852.4	-30.063	Plat W	-13	PASS
	9538	1907.6	-25.551	Plot X		PASS

2. Test Plots:

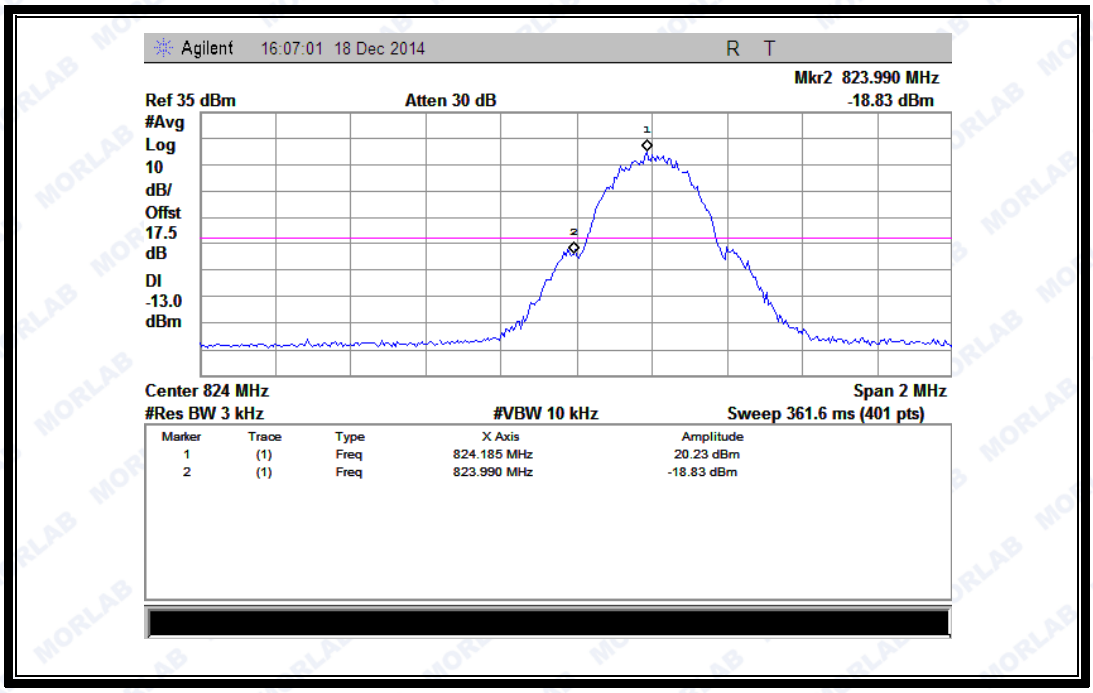

(Plot A: GSM 850 Channel = 128)

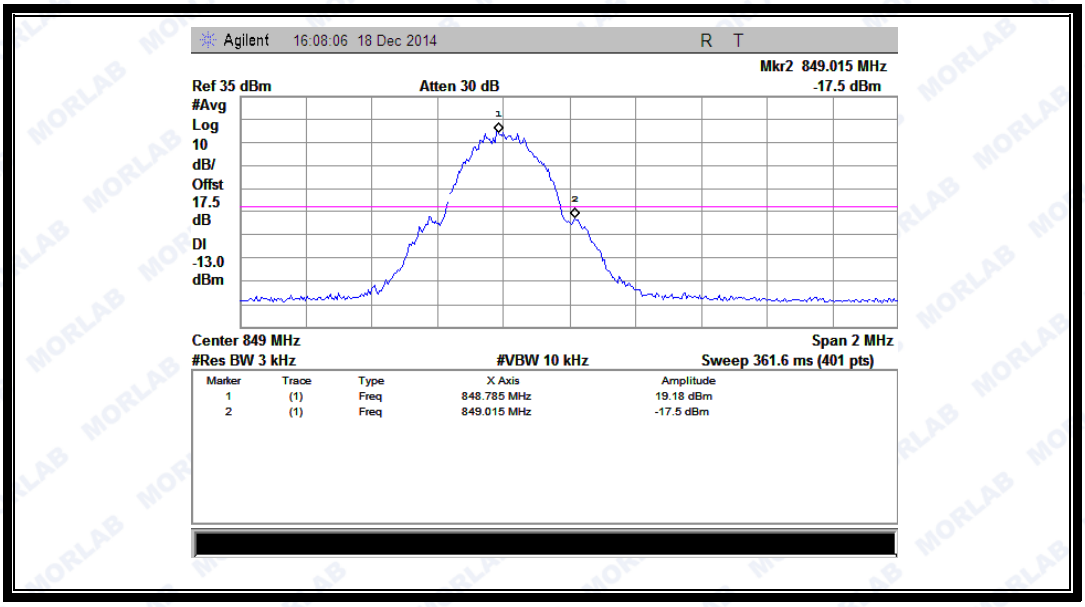

(Plot B: GSM 850 Channel = 251)

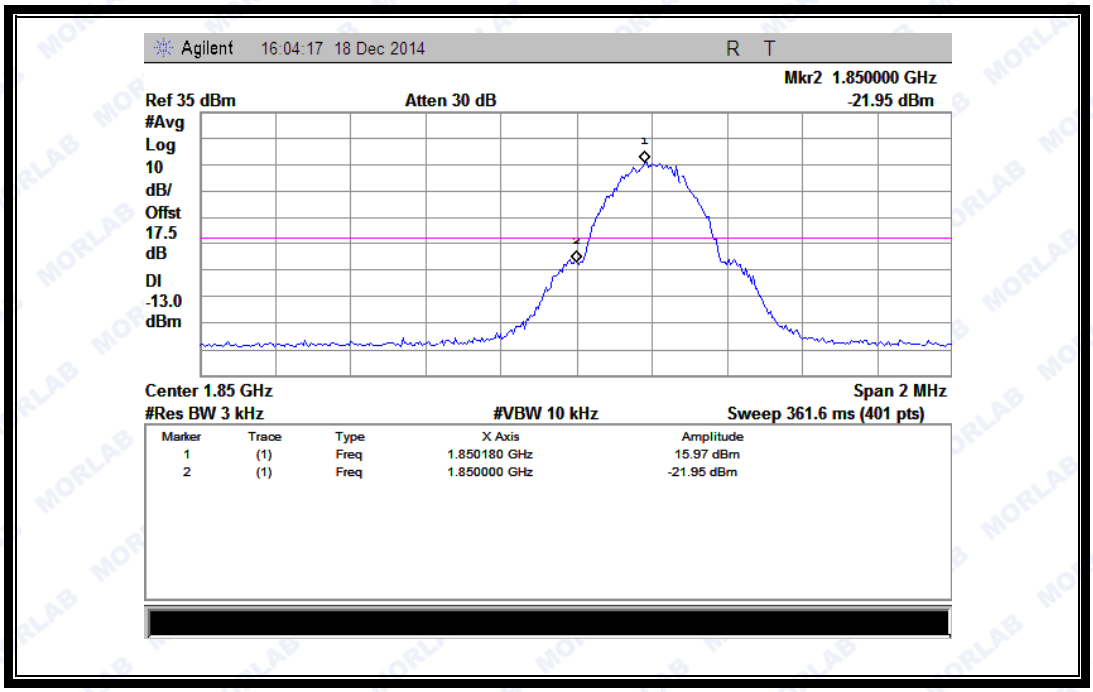

(Plot C: GSM 1900 Channel = 512)

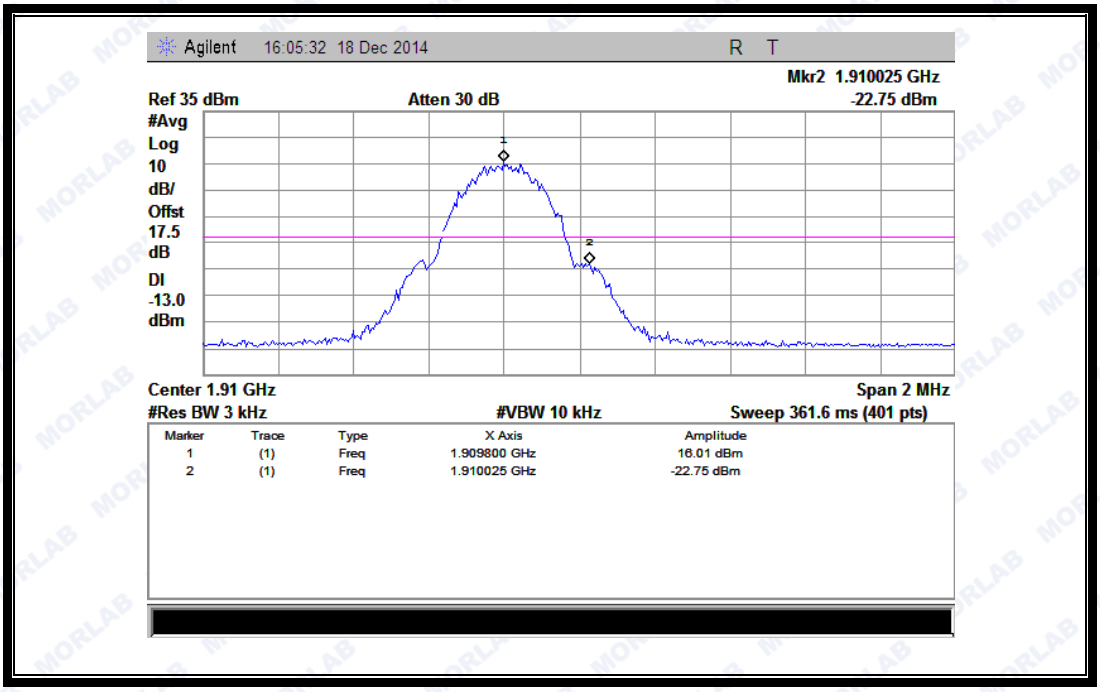

(Plot D: GSM 1900 Channel = 810)

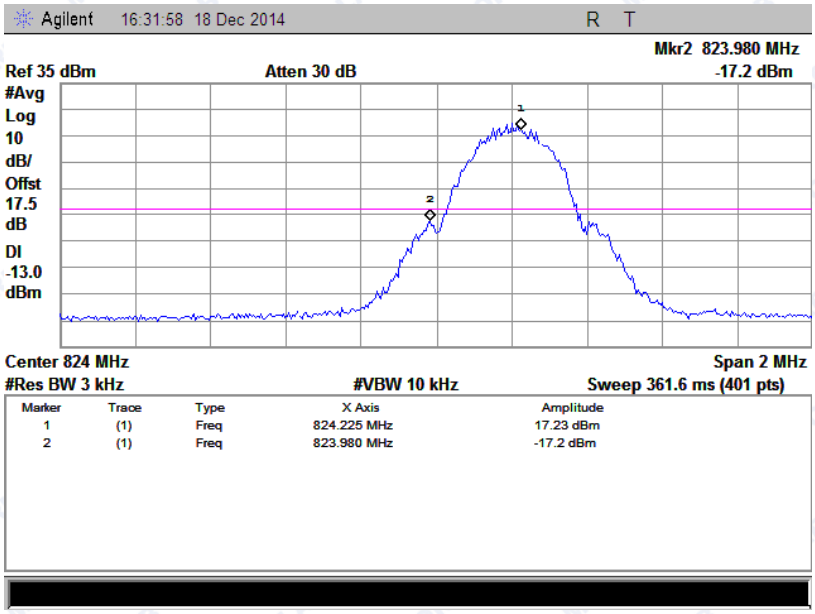

(Plot E: EGPRS 850 Channel = 128)

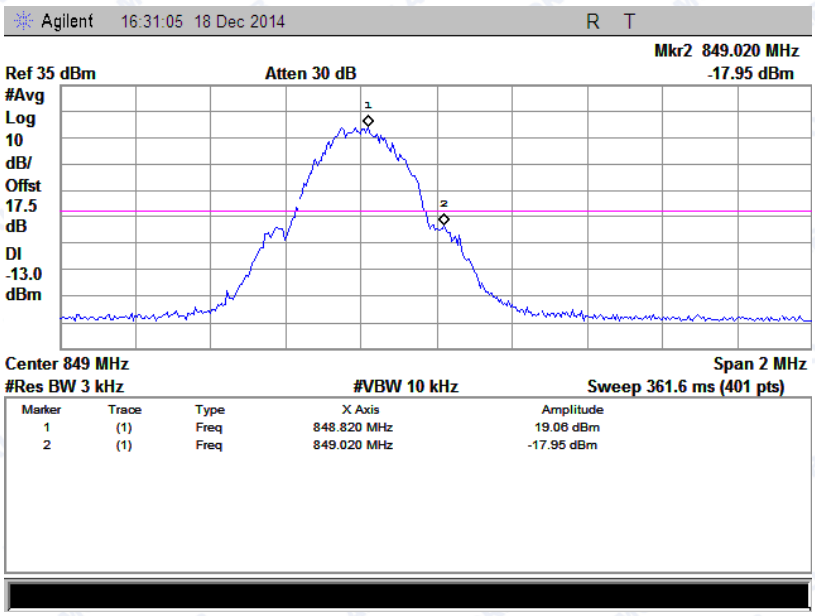

(Plot F: EGPRS 850 Channel = 251)

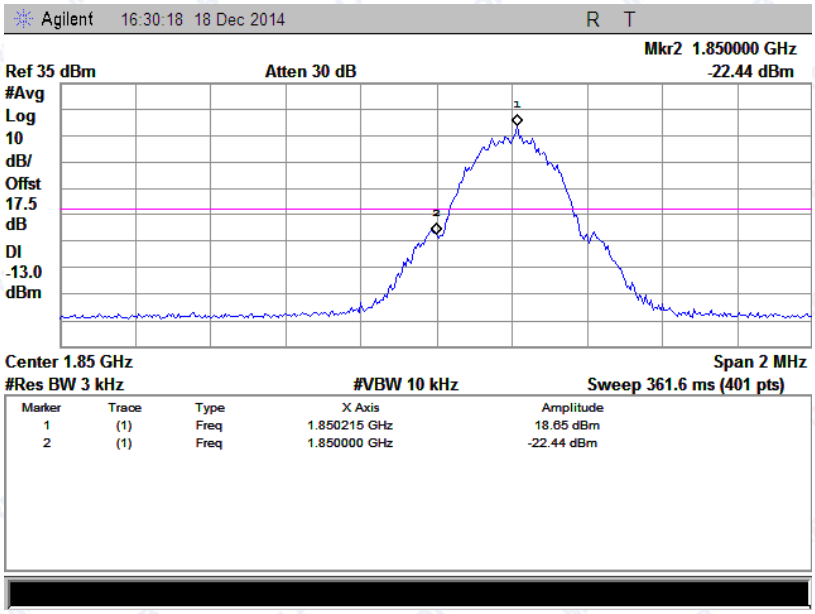

(Plot G: EGPRS 1900 Channel = 512)

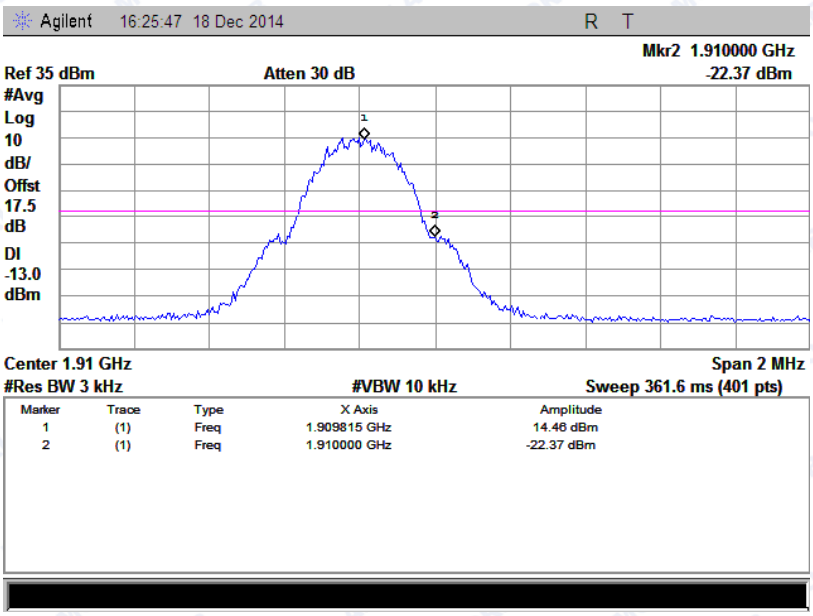

(Plot H: EGPRS 1900 Channel = 810)

(Plot I: WCDMA 850 Channel = 4132)

(Plot J: WCDMA 850 Channel = 4233)

(Plot K: WCDMA 1900 Channel = 9262)

(Plot L: WCDMA 1900 Channel = 9538)

(Plot M: HSDPA 850 Channel = 4132)

(Plot N: HSDPA850 Channel = 4233)

(Plot O: HSDPA 1900 Channel = 9262)

(Plot P: HSDPA 1900 Channel = 9538)

(Plot Q: HSUPA 850 Channel = 4132)

(Plot R: HSUPA850 Channel = 4233)

(Plot S: HSUPA 1900 Channel = 9262)

(Plot T: HSUPA 1900 Channel = 9538)

(Plot U: HSPA+ 850 Channel = 4132)

(Plot V: HSPA+ 850 Channel = 4233)

(Plot W: HSPA+ 1900 Channel = 9262)

(Plot X: HSPA+ 1900 Channel = 9538)

2.7 Transmitter Radiated Power (EIRP/ERP)

2.7.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power

2.7.2 Test Description

1. Test Setup:

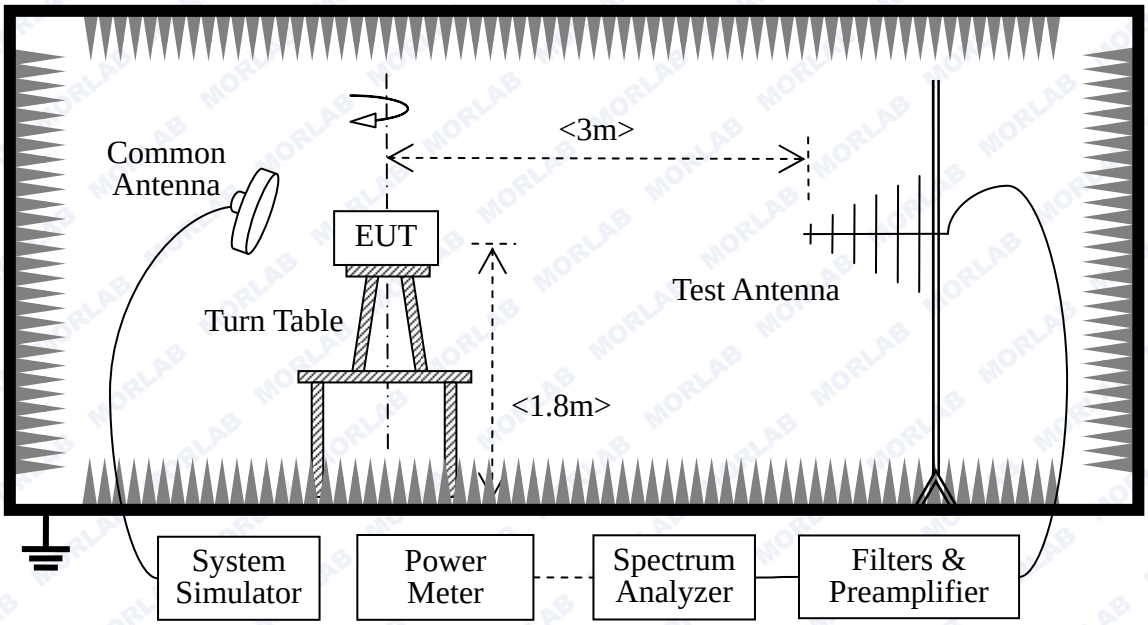

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded.

- GSM Maximum RF output power: GSM 850 32.81dBm, GSM 1900 29.33dBm, EGPRS 850 31.98dBm，EGPRS 1900 28.37dBm,WCDMA 850 24.02dBm, WCDMA 1900 23.25dBm, Please refer to section 2.1.3 of this report.

- Step size (dB): 3dB

- Minimum RF power: GSM 850 3.1dBm, GSM 1900 0.3dBm，EGPRS 850 3.1dBm, EGPRS 1900 0.21dBm ,WCDMA 850 0.39dBm ,WCDMA 1900 0.5dBm.

The Test Antenna is a Bi-Log one (used for 30MHz to 1GHz) or a Horn one (used for above 3GHz), and it's located at the same height as the EUT. The Filters consists of Notch Filters and High Pass Filter.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.02.26	2015.02.25
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2014.02.26	2015.02.25
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2014.02.26	2015.02.25
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2014.02.26	2015.02.25
Substitution Antenna	Schwarzbeck	BBHA 9120C	9120C-384	2014.02.26	2015.02.25
Pre-AMPs	lucix	S10M100L3802	S020180L3203	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C836.5-25-X	NA	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C1747.5-75-X2	NA	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C1880-60-X2	NA	2014.02.26	2015.02.25

2.7.3 Test Result

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested.

The substitution corrections are obtained as described below:

$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$

$A_{TOT} = L_{CABLES} + A_{SUBST}$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

P_{SUBST_TX} is signal generator level,

P_{SUBST_RX} is receiver level,

L_{SUBST_CABLES} is cable losses including TX cable,

$G_{SUBST_TX_ANT}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the Test Spectrum Analyze, so Spectrum Analyze reading is the final values which contain the data of A_{TOT}.

1. GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	PCL	Measured ERP			Limit		Verdict
				dBm	W	Refer to Plot	dBm	W	
GSM 850MHz	128	824.20	5	29.08	0.809	Plot A	38.5	7	PASS
	190	836.60	5	29.51	0.893				PASS
	251	848.80	5	29.83	0.962				PASS
GPRS 850MHz	128	824.20	5	28.47	0.703	Plot B Note 1	38.5	7	PASS
	190	836.60	5	28.48	0.705				PASS
	251	848.80	5	28.31	0.678				PASS
EGPRS 850MHz	128	824.20	5	28.38	0.689	Plot C Note 1	38.5	7	PASS
	190	836.60	5	28.07	0.641				PASS
	251	848.80	5	28.28	0.673				PASS

Band	Channel	Frequency (MHz)	PCL	Measured EIRP			Limit		Verdict
				dBm	W	Refer to Plot	dBm	W	
GSM 1900MHz	512	1850.2	0	28.4	0.692	Plot D	33	2	PASS
	661	1880.0	0	27.44	0.555				PASS
	810	1909.8	0	26.43	0.439				PASS
GPRS 1900MHz	512	1850.2	0	26.42	0.439	Plot E Note 1	33	2	PASS
	661	1880.0	0	26.24	0.421				PASS
	810	1909.8	0	26.08	0.406				PASS
EGPRS 1900MHz	512	1850.2	0	26.42	0.439	Plot F Note 1	33	2	PASS
	661	1880.0	0	26.4	0.437				PASS
	810	1909.8	0	26.24	0.421				PASS

Note 1:	For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.

2. WCDMA Model Test Verdict:

Band	Channel	Frequency (MHz)	Measured ERP			Limit		Verdict
			dBm	W	Refer to Plot	dBm	W	
WCDMA 850MHz	4132	826.4	23.99	0.251	Plot G	38.5	7	PASS
	4175	835	23.93	0.247				PASS
	4233	846.6	23.85	0.243				PASS
HSDPA 850MHz	4132	826.4	23.36	0.217	Plot H	38.5	7	PASS
	4175	835	23.38	0.218				PASS
	4233	846.6	23.37	0.217				PASS
HSUPA 850MHz	4132	826.4	23.48	0.223	Plot I	38.5	7	PASS
	4175	835	23.22	0.209				PASS
	4233	846.6	23.28	0.213				PASS
HSPA+ 850MHz	4132	826.4	23.43	0.22	Plot J	38.5	7	PASS
	4175	835	23.38	0.218				PASS
	4233	846.6	23.36	0.217				PASS

Band	Channel	Frequency (MHz)	Measured EIRP			Limit		Verdict
			dBm	W		dBm	W	
WCDMA 1900MHz	9262	1852.4	23.54	0.226	Plot K	33	2	PASS
	9400	1880	23.39	0.218				PASS
	9538	1907.6	22.78	0.189				PASS
HSDPA 1900MHz	9262	1852.4	24.05	0.254	Plot L	33	2	PASS
	9400	1880	23.27	0.212				PASS
	9538	1907.6	22.63	0.183				PASS
HSUPA 1900MHz	9262	1852.4	23.54	0.226	Plot M	33	2	PASS
	9400	1880	23.53	0.225				PASS
	9538	1907.6	22.75	0.188				PASS
HSPA+ 1900MHz	9262	1852.4	23.55	0.226	Plot N	33	2	PASS
	9400	1880	23.58	0.228				PASS
	9538	1907.6	22.9	0.195				PASS

3. Test Plots:

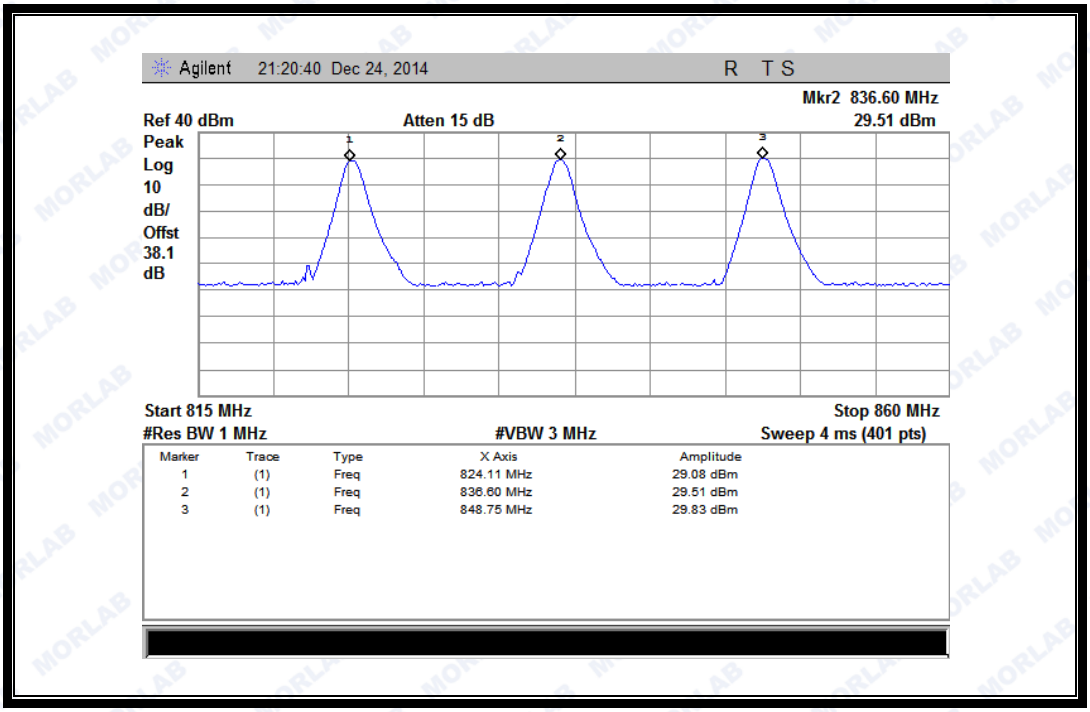

(Plot A: GSM 850MHz Channel = 128, 190, 251)

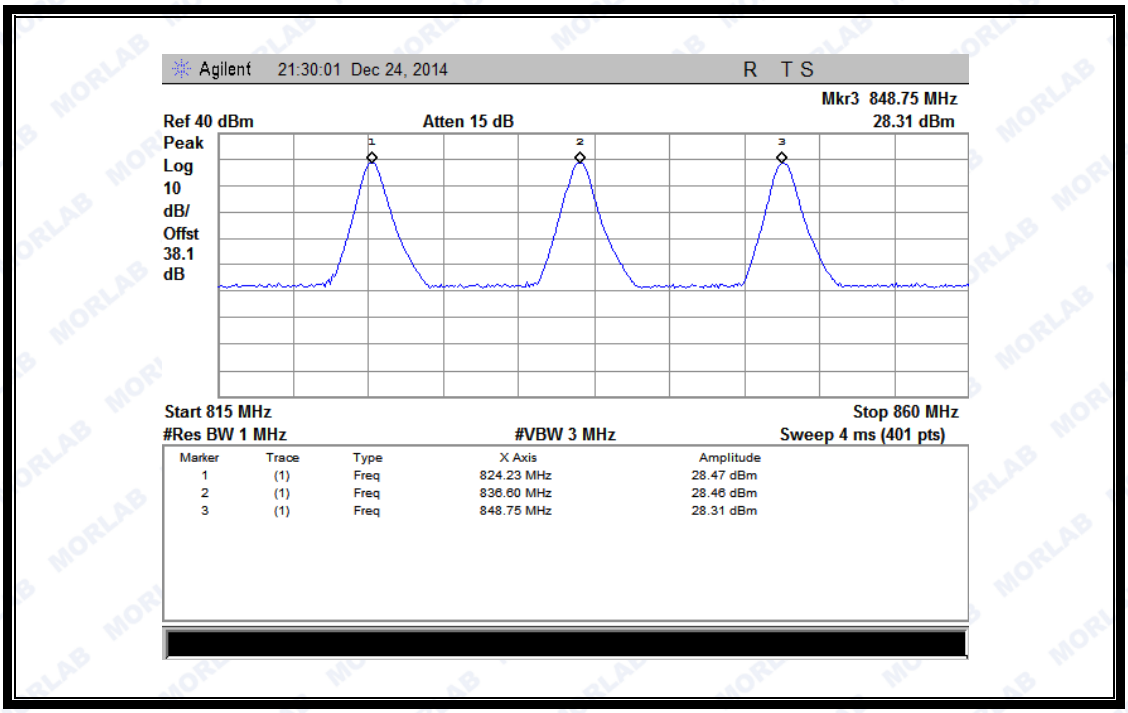

(Plot B: GPRS 850MHz Channel = 128, 190, 251)

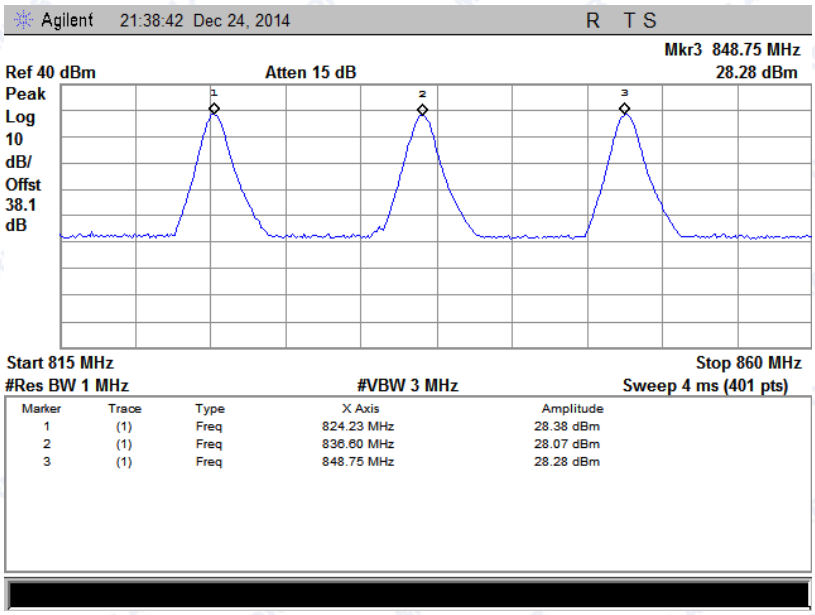

(Plot C: EGPRS 850MHz Channel = 128, 190, 251)

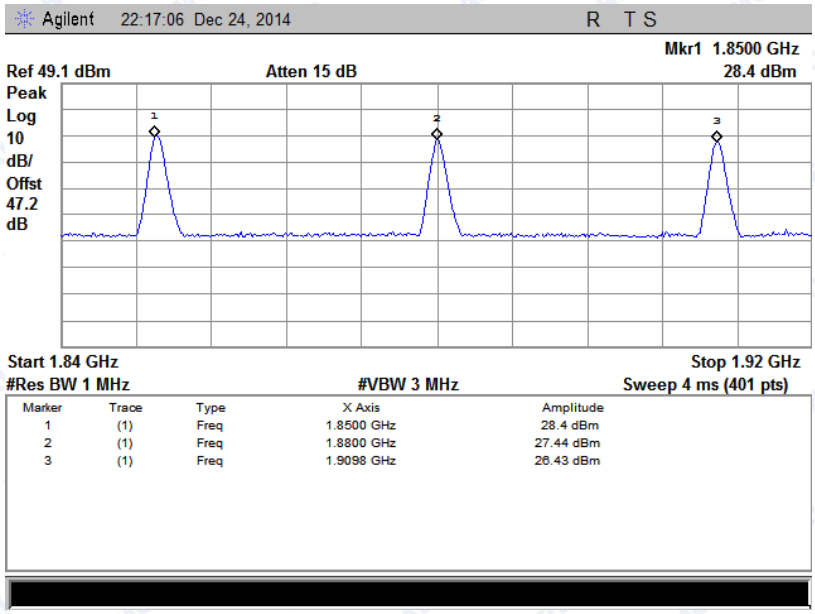

(Plot D: GSM 1900MHz Channel = 512, 661, 810)

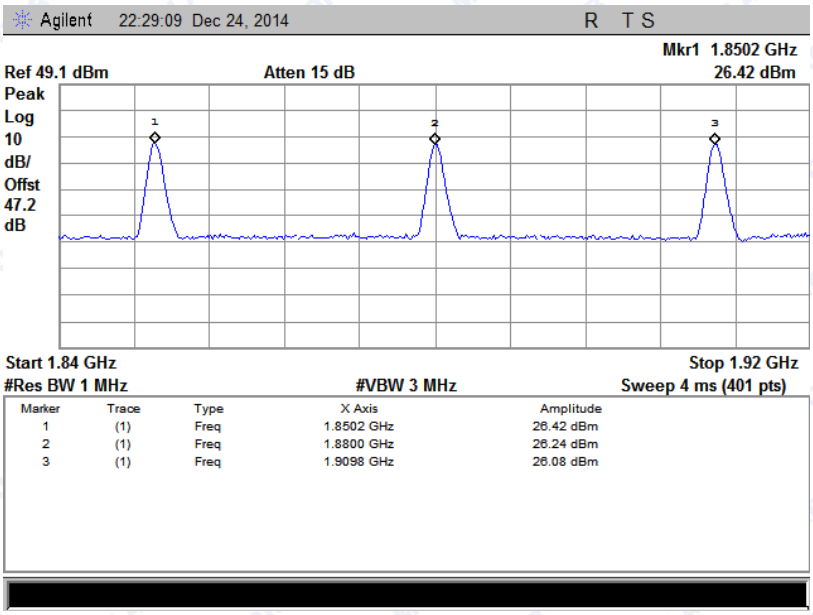

(Plot E: GPRS 1900MHz Channel = 512, 661, 810)

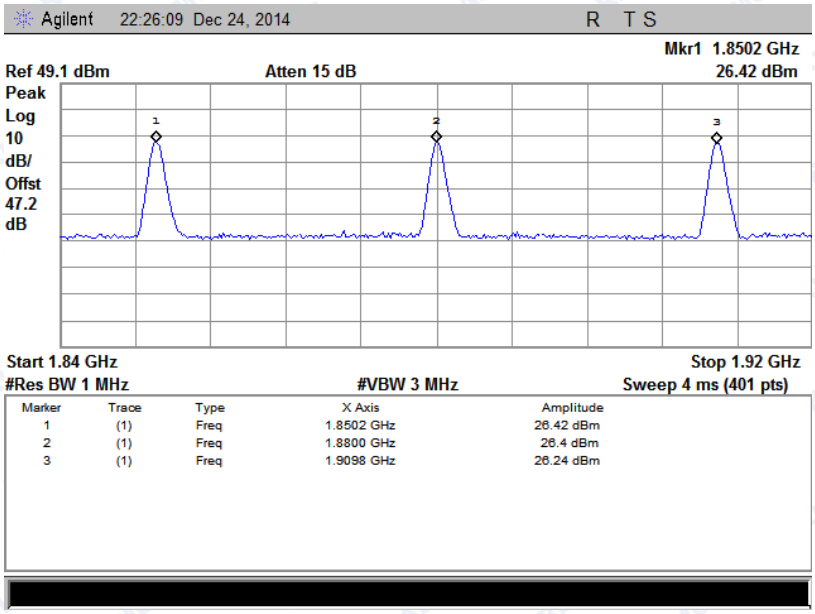

(Plot F: EGPRS 1900MHz Channel = 512, 661, 810)

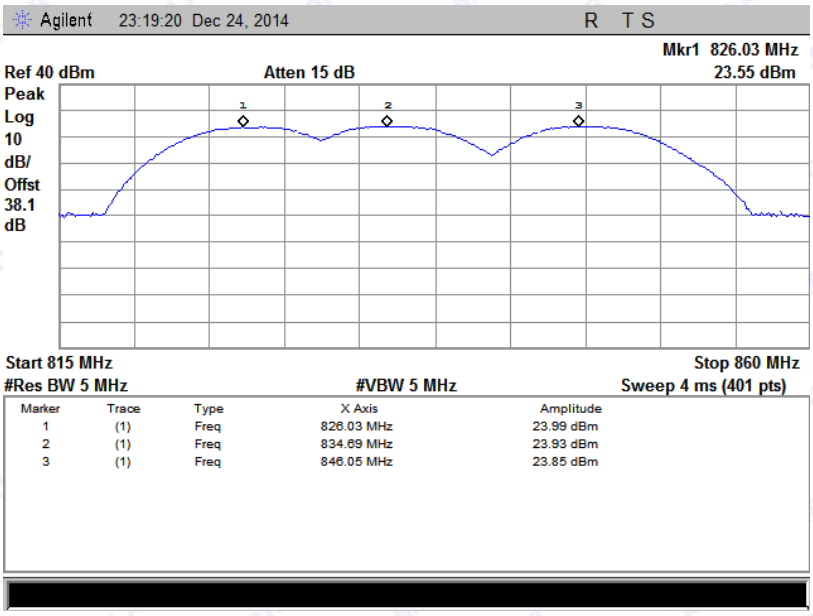

(Plot G: WCDMA 850 MHz Channel = 4132, 4175, 4233)

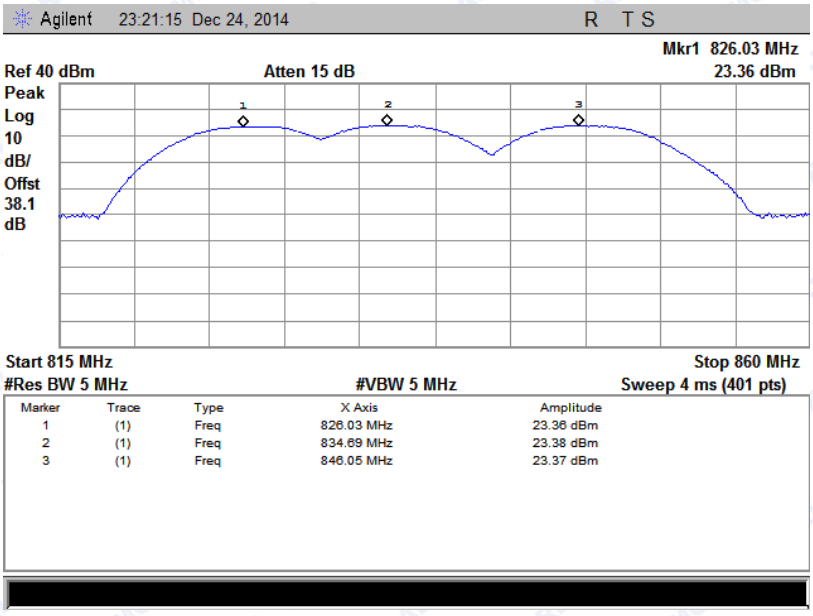

(Plot H: HSDPA 850 MHz Channel = 4132, 4175, 4233)

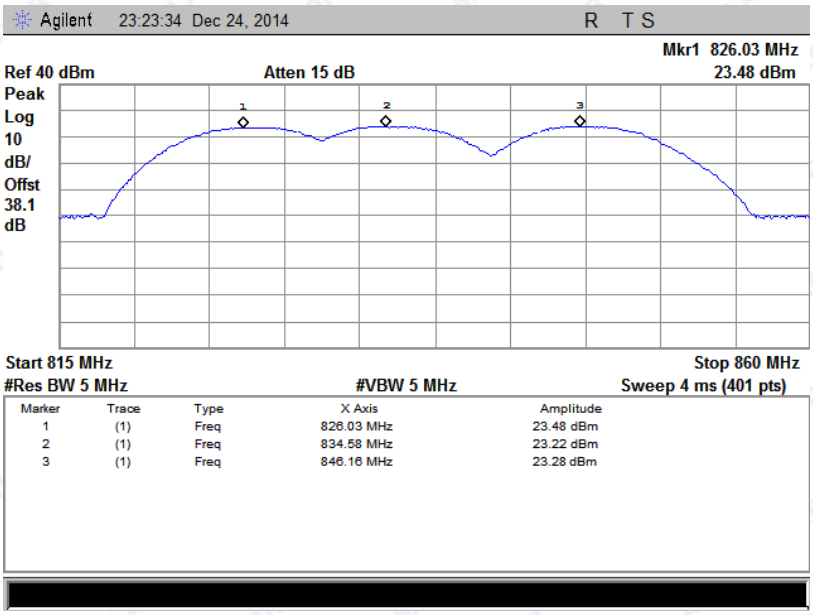

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	826.03 MHz	23.48 dBm
2	(1)	Freq	834.58 MHz	23.22 dBm
3	(1)	Freq	846.16 MHz	23.28 dBm

(Plot I: HSUPA 850 MHz Channel = 4132, 4175, 4233)

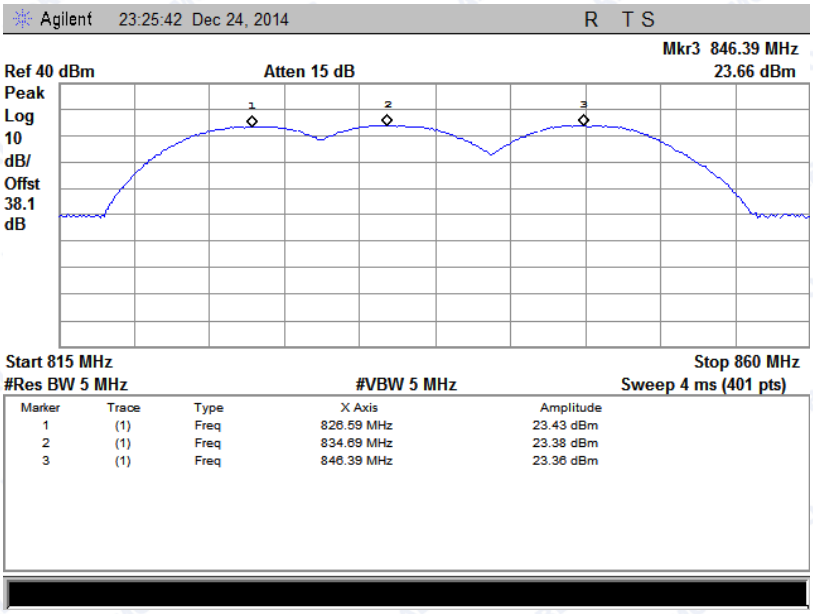

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	826.59 MHz	23.43 dBm
2	(1)	Freq	834.69 MHz	23.38 dBm
3	(1)	Freq	846.39 MHz	23.36 dBm

(Plot J: HSPA+ 850 MHz Channel = 4132, 4175, 4233)

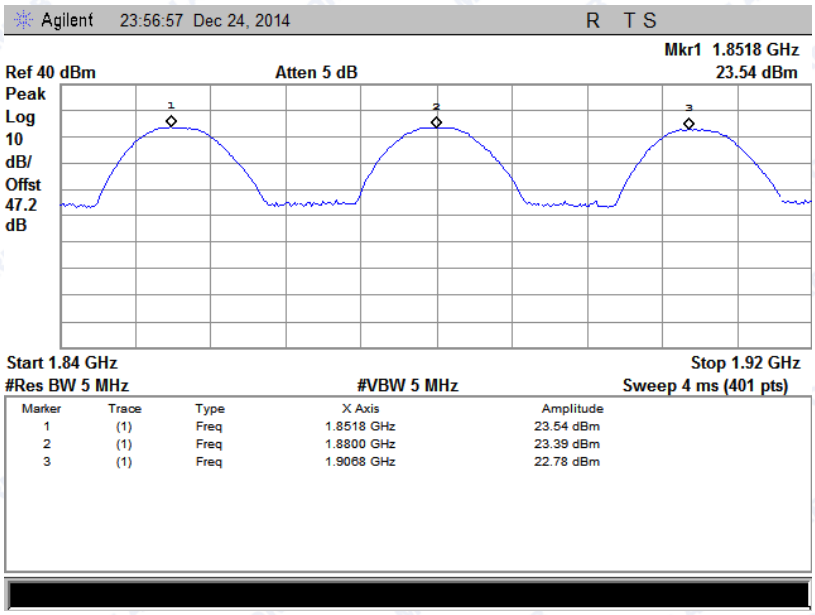

(Plot K: WCDMA 1900 MHz Channel = 9262, 9400, 9538)

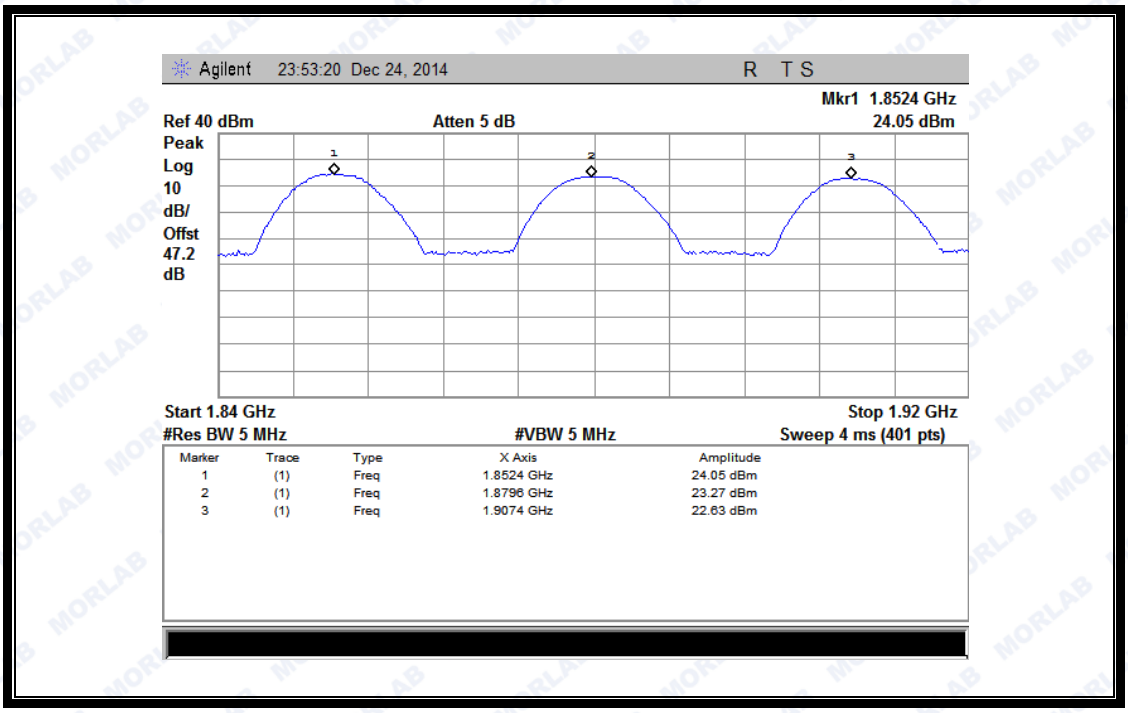

(Plot L: HSDPA1900 MHz Channel = 9262, 9400, 9538)

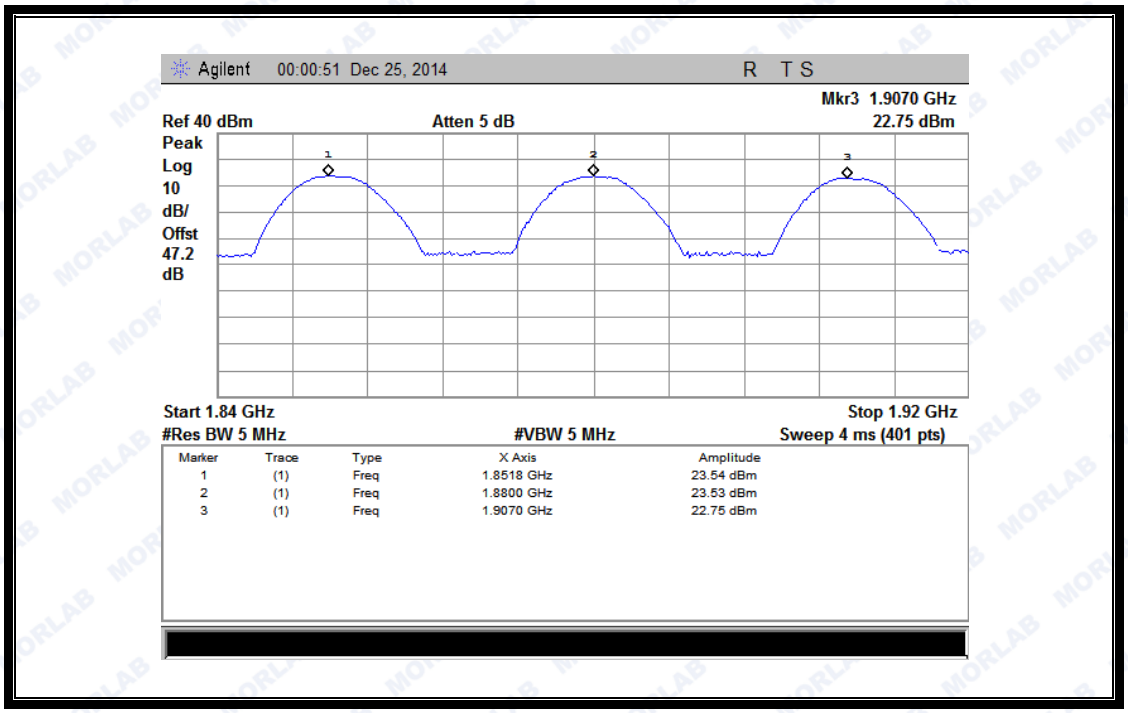

(Plot M: HSUPA1900 MHz Channel = 9262, 9400, 9538)

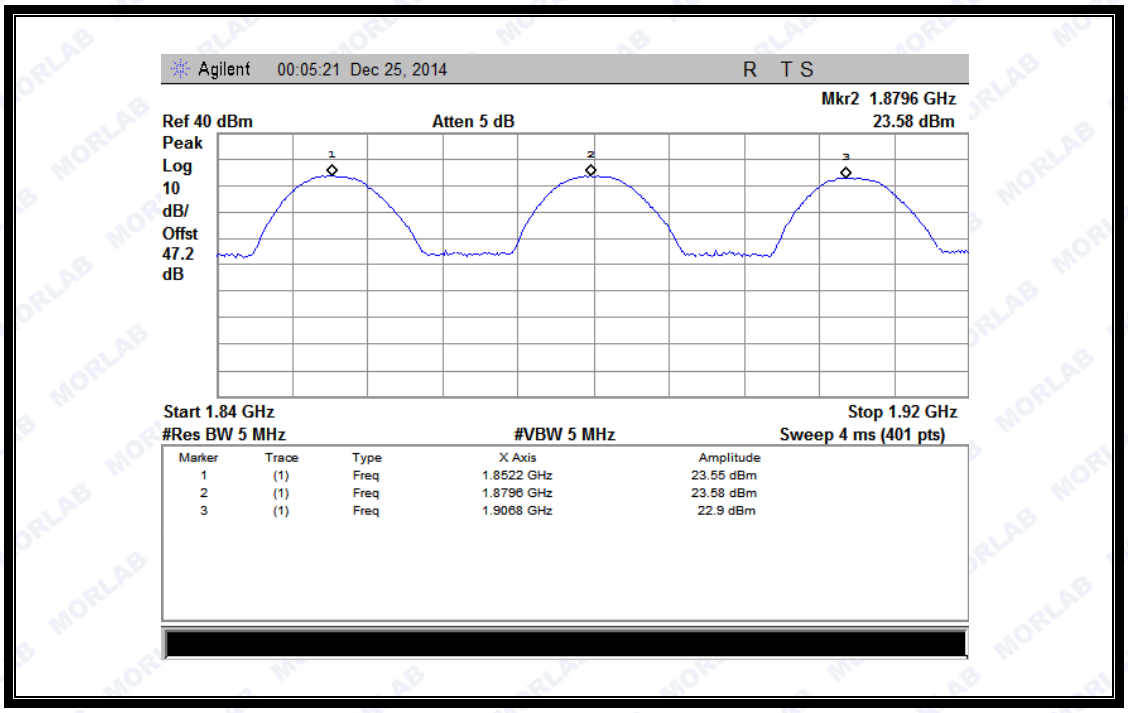

(Plot N: HSPA+ 1900 MHz Channel = 9262, 9400, 9538)

2.8 Radiated Out of Band Emissions

2.8.1 Requirement

According to FCC section 22.917(a) and section 24.238(a) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43+10*log(P)dB. This calculated to be -13dBm.

The spurious emission with frequency band 1900 according to FCC section 2.1057.

2.8.2 Test Description

See section 2.7.2 of this report.

Equipment List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2014.02.26	2015.02.25
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.02.26	2015.02.25
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2014.02.26	2015.02.25
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2014.02.26	2015.02.25
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2014.02.26	2015.02.25
Substitution Antenna	Schwarzbeck	BBHA 9120C	9120C-384	2014.02.26	2015.02.25
Pre-AMPs	lucix	S10M100L3802	S020180L3203	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C836.5-25-X	NA	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C1747.5-75-X2	NA	2014.02.26	2015.02.25
Notch Filter	COM-MW	ZBSF-C1880-60-X2	NA	2014.02.26	2015.02.25

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.8.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
GSM 850MHz	128	824.2	< -25	< -25	Plot A.1/A.2	-13	PASS
	190	836.6	< -25	< -25	Plot A.3/A.4		PASS
	251	848.8	< -25	< -25	Plot A.5/A.6		PASS
GSM 1900MHz	512	1850.2	< -25	< -25	Plot B.1/B.2	-13	PASS
	661	1880.0	< -25	< -25	Plot B.3/B.4		PASS
	810	1909.8	< -25	< -25	Plot B.5/B.6		PASS
EDGE 850MHz	128	824.2	< -25	< -25	Plot C.1/C.2	-13	PASS
	190	836.6	< -25	< -25	Plot C.3/C.4		PASS
	251	848.8	< -25	< -25	Plot C.5/C.6		PASS
EDGE 1900MHz	512	1850.2	< -25	< -25	Plot D.1/D.2	-13	PASS
	661	1880.0	< -25	< -25	Plot D.3/D.4		PASS
	810	1909.8	< -25	< -25	Plot D.5/D.6		PASS
WCDMA 850MHz	4132	826.4	< -25	< -25	Plot E.1/E.2	-13	PASS
	4175	835	< -25	< -25	Plot E.3/E.4		PASS
	4233	846.6	< -25	< -25	Plot E.5/E.6		PASS
WCDMA 1900MHz	9262	1852.4	< -25	< -25	Plot F.1/F.2	-13	PASS
	9400	1880	< -25	< -25	Plot F.3/F.4		PASS
	9538	1907.6	< -25	< -25	Plot F.5/F.6		PASS
HSDPA 850MHz	4132	826.4	< -25	< -25	Plot G.1/G.2	-13	PASS
	4175	835	< -25	< -25	Plot G.3/G.4		PASS
	4233	846.6	< -25	< -25	Plot G.5/G.6		PASS
HSDPA 1900MHz	9262	1852.4	< -25	< -25	Plot H.1/H.2	-13	PASS
	9400	1880	< -25	< -25	Plot H.3/H.4		PASS
	9538	1907.6	< -25	< -25	Plot H.5/H.6		PASS
HSUPA 850MHz	4132	826.4	< -25	< -25	Plot I.1/I.2	-13	PASS
	4175	835	< -25	< -25	Plot I.3/I.4		PASS
	4233	846.6	< -25	< -25	Plot I.5/I.6		PASS
HSUPA 1900MHz	9262	1852.4	< -25	< -25	Plot J.1/J.2	-13	PASS
	9400	1880	< -25	< -25	Plot J.3/J.4		PASS
	9538	1907.6	< -25	< -25	Plot J.5/J.6		PASS
HSPA+ 850MHz	4132	826.4	< -25	< -25	Plot K.1/K.2	-13	PASS
	4175	835	< -25	< -25	Plot K.3/K.4		PASS
	4233	846.6	< -25	< -25	Plot K.5/K.6		PASS
HSPA+ 1900MHz	9262	1852.4	< -25	< -25	Plot L.1/L.2	-13	PASS
	9400	1880	< -25	< -25	Plot L.3/L.4		PASS

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
	9538	1907.6	< -25	< -25	Plot L.5/L.6		PASS

2. Test Plots for the Whole Measurement Frequency Range:

Note1: the power of the EUT transmitting frequency should be ignored.

Note2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

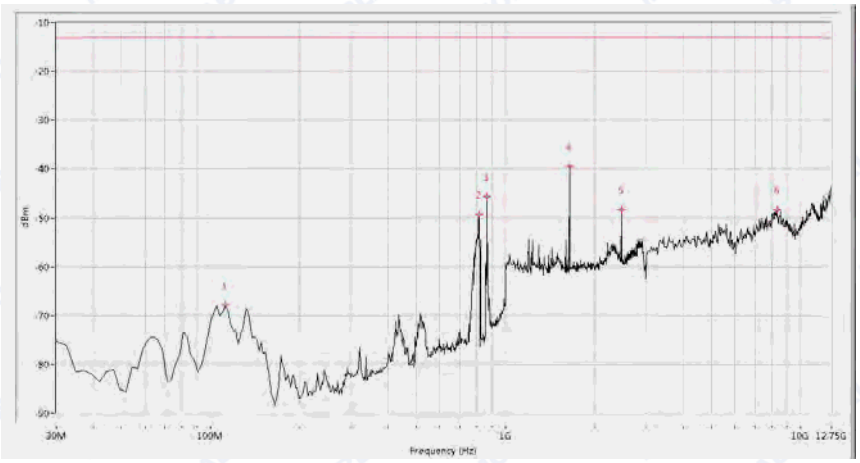

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
112.244	-67.74	-13.0	54.7	260.4	Horizontal	PASS
813.741	-49.36	-13.0	36.4	220.2	Horizontal	N.A
866.958	-45.71	-13.0	32.7	66.2	Horizontal	N.A
1648.379	-39.47	-13.0	26.5	355.5	Horizontal	PASS
2471.322	-48.38	-13.0	35.4	2.7	Horizontal	PASS
8349.127	-48.31	-13.0	35.3	61.9	Horizontal	PASS

(Plot A.1: GSM 850MHz Channel = 128, Test Antenna Horizontal)

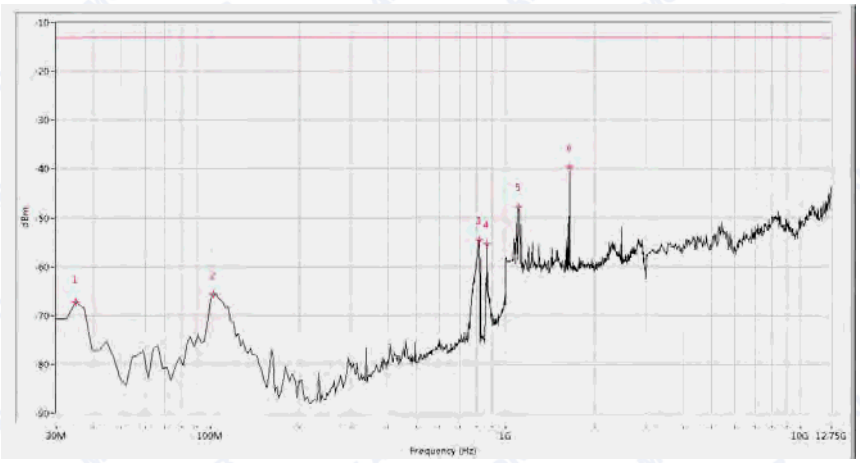

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-67.12	-13.0	54.1	97.7	Vertical	PASS
102.569	-65.60	-13.0	52.6	134.4	Vertical	PASS
813.741	-54.53	-13.0	41.5	3.8	Vertical	N.A
866.958	-55.25	-13.0	42.2	14.7	Vertical	N.A
1109.726	-47.67	-13.0	34.7	324.3	Vertical	PASS
1648.379	-39.65	-13.0	26.7	305.8	Vertical	PASS

(Plot A.2: GSM 850MHz Channel = 128, Test Antenna Vertical)

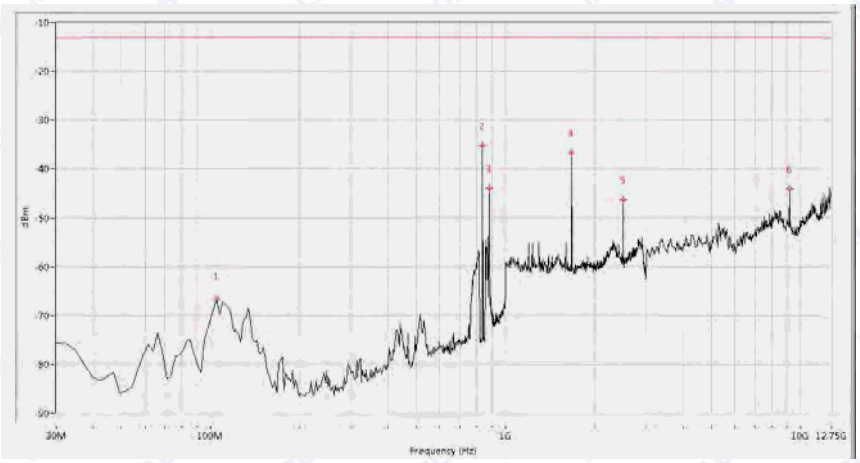

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-66.62	-13.0	53.6	64.1	Horizontal	PASS
835.511	-35.19	-13.0	22.2	222.8	Horizontal	N.A
879.052	-43.97	-13.0	31.0	286.1	Horizontal	N.A
1673.317	-36.65	-13.0	23.6	357.1	Horizontal	PASS
2506.234	-46.35	-13.0	33.4	27.9	Horizontal	PASS
9175.810	-44.07	-13.0	31.1	11.9	Horizontal	PASS

(Plot A.3: GSM 850MHz Channel = 190, Test Antenna Horizontal)

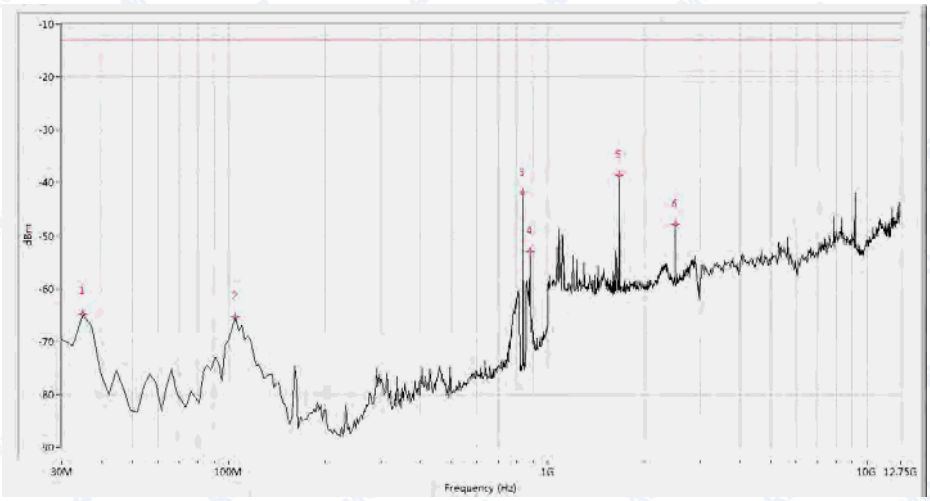

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-64.84	-13.0	51.8	-0.0	Vertical	PASS
104.988	-65.22	-13.0	52.2	164.7	Vertical	PASS
835.511	-41.84	-13.0	28.8	0.0	Vertical	N.A
879.052	-53.01	-13.0	40.0	151.5	Vertical	N.A
1673.317	-38.48	-13.0	25.5	-0.0	Vertical	PASS
2506.234	-47.87	-13.0	34.9	1.6	Vertical	PASS

(Plot A.4: GSM 850MHz Channel = 190, Test Antenna Vertical)

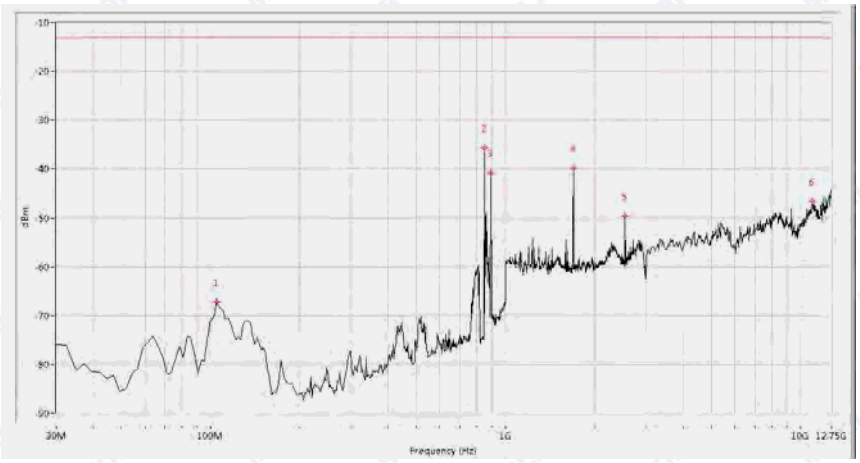

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-67.25	-13.0	54.2	-0.0	Horizontal	PASS
847.606	-35.68	-13.0	22.7	231.1	Horizontal	N.A
891.147	-40.66	-13.0	27.7	93.0	Horizontal	N.A
1698.254	-39.79	-13.0	26.8	360.0	Horizontal	PASS
2541.147	-49.52	-13.0	36.5	156.3	Horizontal	PASS
10975.062	-46.52	-13.0	33.5	129.8	Horizontal	PASS

(Plot A.5: GSM 850MHz Channel = 251, Test Antenna Horizontal)

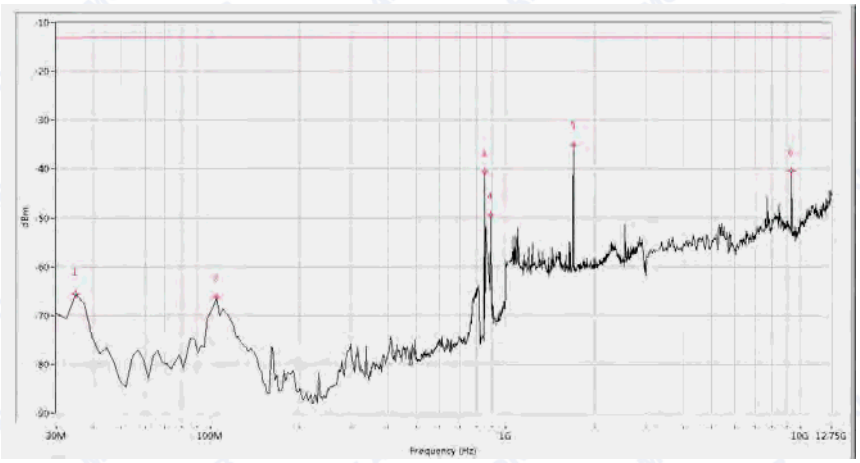

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.62	-13.0	52.6	217.8	Vertical	PASS
104.988	-66.21	-13.0	53.2	178.3	Vertical	PASS
847.606	-40.57	-13.0	27.6	336.7	Vertical	N.A
891.147	-49.38	-13.0	36.4	146.8	Vertical	N.A
1698.254	-34.95	-13.0	22.0	100.4	Vertical	PASS
9321.696	-40.44	-13.0	27.4	-0.0	Vertical	PASS

(Plot A.6: GSM 850MHz Channel = 251, Test Antenna Vertical)

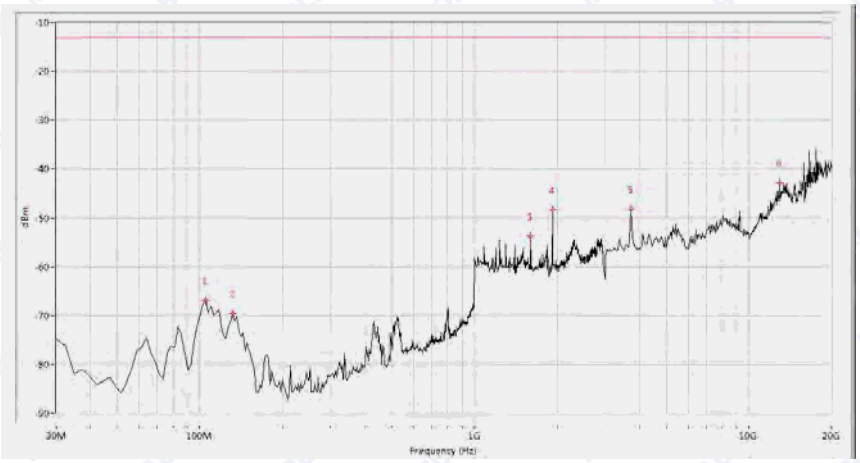

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-66.86	-13.0	53.9	78.6	Horizontal	PASS
131.596	-69.54	-13.0	56.5	-0.0	Horizontal	PASS
1598.504	-53.79	-13.0	40.8	0.4	Horizontal	PASS
1927.681	-48.30	-13.0	35.3	169.6	Horizontal	N.A
3720.698	-48.11	-13.0	35.1	319.6	Horizontal	PASS
12962.594	-42.78	-13.0	29.8	278.9	Horizontal	PASS

(Plot B.1: GSM 1900MHz Channel = 512, Test Antenna Horizontal)

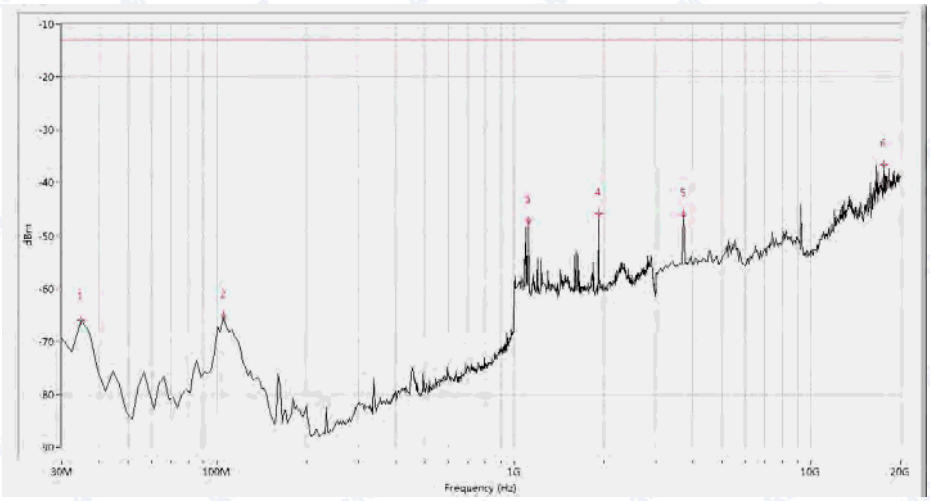

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.86	-13.0	52.9	48.6	Vertical	PASS
104.988	-65.18	-13.0	52.2	96.5	Vertical	PASS
1119.701	-47.20	-13.0	34.2	67.4	Vertical	PASS
1927.681	-45.80	-13.0	32.8	82.5	Vertical	N.A
3720.698	-45.96	-13.0	33.0	360.0	Vertical	PASS
17583.541	-36.62	-13.0	23.6	173.0	Vertical	PASS

(Plot B.2: GSM 1900MHz Channel = 512, Test Antenna Vertical)

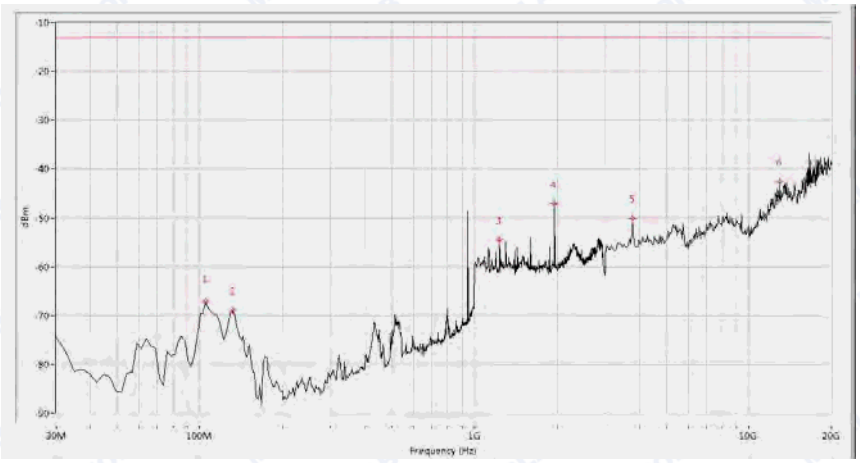

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-67.02	-13.0	54.0	262.3	Horizontal	PASS
131.596	-68.99	-13.0	56.0	2.4	Horizontal	PASS
1234.414	-54.45	-13.0	41.5	324.5	Horizontal	PASS
1957.606	-47.06	-13.0	34.1	228.9	Horizontal	N.A
3763.092	-50.08	-13.0	37.1	216.9	Horizontal	PASS
12962.594	-42.66	-13.0	29.7	39.4	Horizontal	PASS

(Plot B.3: GSM 1900MHz Channel = 661, Test Antenna Horizontal)

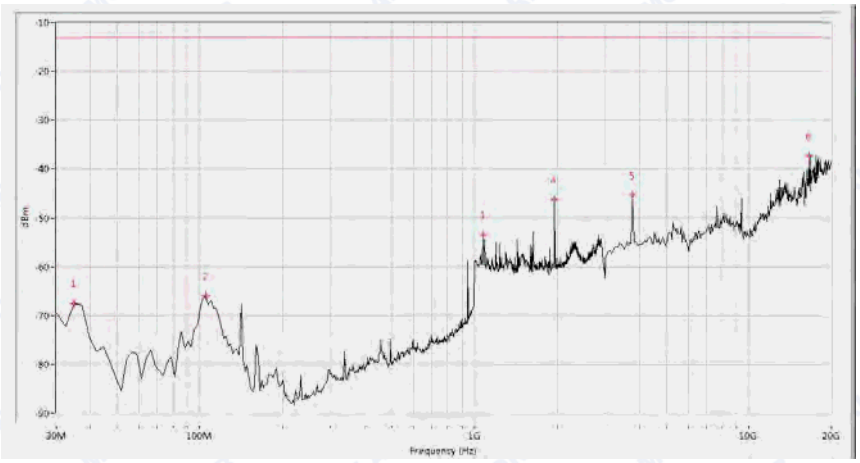

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-67.52	-13.0	54.5	359.3	Vertical	PASS
104.988	-65.99	-13.0	53.0	0.4	Vertical	PASS
1074.813	-53.44	-13.0	40.4	194.6	Vertical	PASS
1957.606	-46.28	-13.0	33.3	85.0	Vertical	N.A
3763.092	-45.33	-13.0	32.3	358.7	Vertical	PASS
16523.691	-37.28	-13.0	24.3	161.7	Vertical	PASS

(Plot B.4: GSM 1900MHz Channel = 661, Test Antenna Vertical)

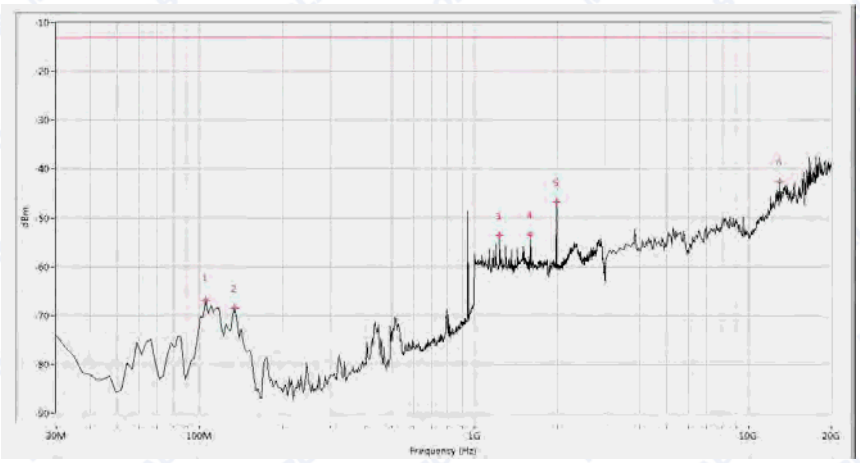

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-66.90	-13.0	53.9	90.3	Horizontal	PASS
134.015	-68.47	-13.0	55.5	274.6	Horizontal	PASS
1234.414	-53.57	-13.0	40.6	43.7	Horizontal	PASS
1598.504	-53.48	-13.0	40.5	302.9	Horizontal	PASS
1987.531	-46.77	-13.0	33.8	237.5	Horizontal	N.A
12962.594	-42.56	-13.0	29.6	257.9	Horizontal	PASS

(Plot B.5: GSM 1900MHz Channel = 810, Test Antenna Horizontal)

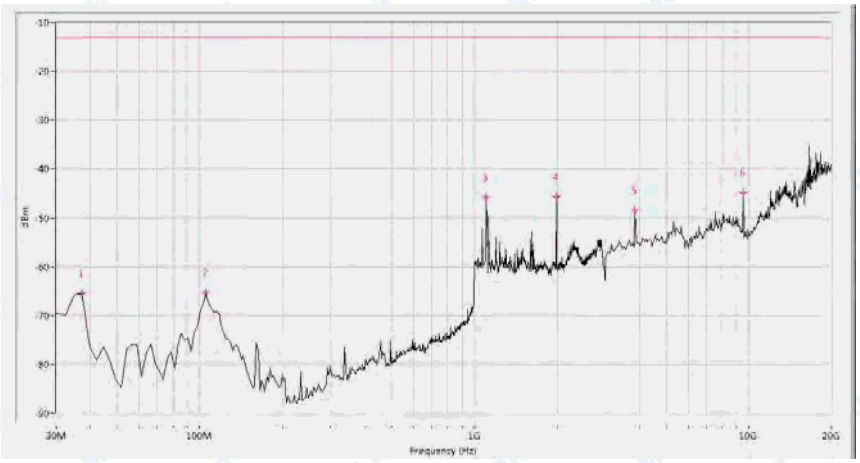

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
37.257	-65.37	-13.0	52.4	28.3	Vertical	PASS
104.988	-65.32	-13.0	52.3	160.3	Vertical	PASS
1104.738	-45.83	-13.0	32.8	64.3	Vertical	PASS
1987.531	-45.70	-13.0	32.7	273.7	Vertical	N.A
3847.880	-48.47	-13.0	35.5	-0.0	Vertical	PASS
9528.678	-44.82	-13.0	31.8	29.1	Vertical	PASS

(PlotB.6: GSM 1900MHz Channel = 810, Test Antenna Vertical)

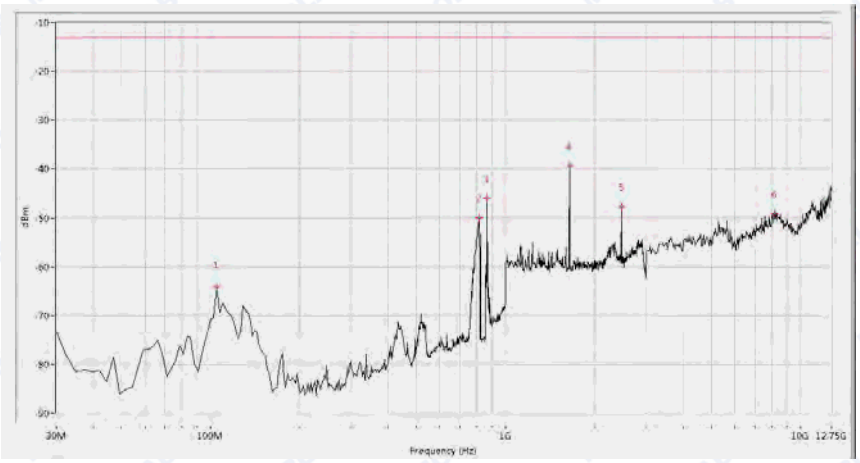

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-64.24	-13.0	51.2	36.6	Horizontal	PASS
813.741	-49.85	-13.0	36.9	212.5	Horizontal	N.A
866.958	-45.91	-13.0	32.9	58.5	Horizontal	N.A
1648.379	-39.38	-13.0	26.4	-0.0	Horizontal	PASS
2471.322	-47.65	-13.0	34.6	8.7	Horizontal	PASS
8203.242	-49.20	-13.0	36.2	229.8	Horizontal	PASS

(Plot C.1: EGPRS 850MHz Channel = 128, Test Antenna Horizontal)

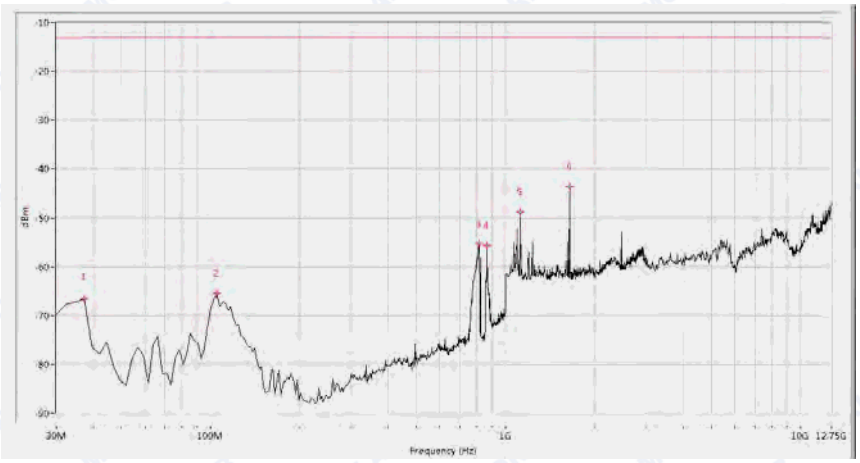

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
37.257	-66.48	-13.0	53.5	317.5	Vertical	PASS
104.988	-65.43	-13.0	52.4	341.6	Vertical	PASS
813.741	-55.37	-13.0	42.4	355.5	Vertical	N.A
866.958	-55.59	-13.0	42.6	325.6	Vertical	N.A
1124.688	-48.78	-13.0	35.8	333.9	Vertical	PASS
1648.379	-43.59	-13.0	30.6	3.0	Vertical	PASS

(Plot C.2: EGPRS 850MHz Channel = 128, Test Antenna Vertical)

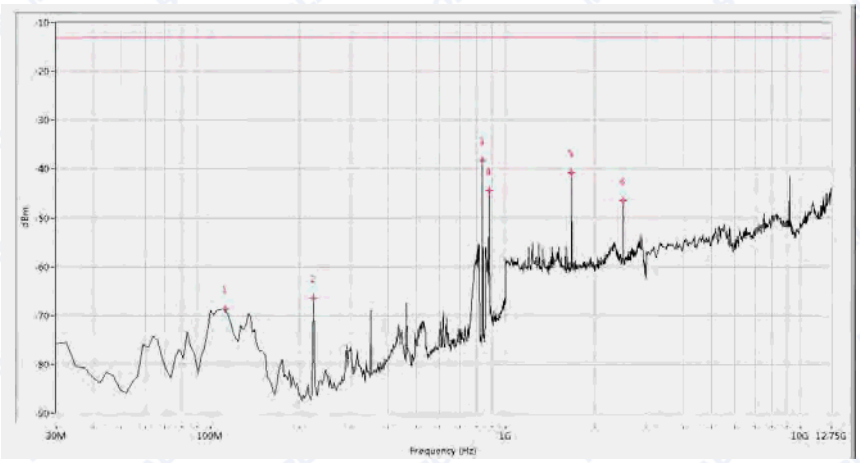

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
112.244	-68.57	-13.0	55.6	264.1	Horizontal	PASS
223.516	-66.34	-13.0	53.3	226.4	Horizontal	PASS
835.511	-38.26	-13.0	25.3	69.6	Horizontal	N.A
879.052	-44.33	-13.0	31.3	81.9	Horizontal	N.A
1673.317	-40.74	-13.0	27.7	358.3	Horizontal	PASS
2506.234	-46.37	-13.0	33.4	5.5	Horizontal	PASS

(Plot C.3: EGPRS 850MHz Channel = 190, Test Antenna Horizontal)

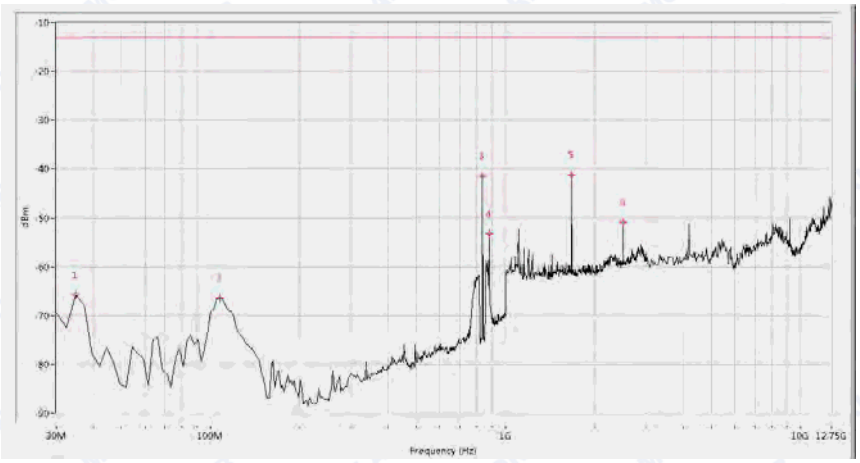

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.75	-13.0	52.8	105.4	Vertical	PASS
107.406	-66.37	-13.0	53.4	252.0	Vertical	PASS
835.511	-41.33	-13.0	28.3	339.1	Vertical	N.A
879.052	-53.30	-13.0	40.3	339.1	Vertical	N.A
1673.317	-41.27	-13.0	28.3	270.0	Vertical	PASS
2506.234	-50.80	-13.0	37.8	70.9	Vertical	PASS

(Plot C.4: EGPRS 850MHz Channel = 190, Test Antenna Vertical)

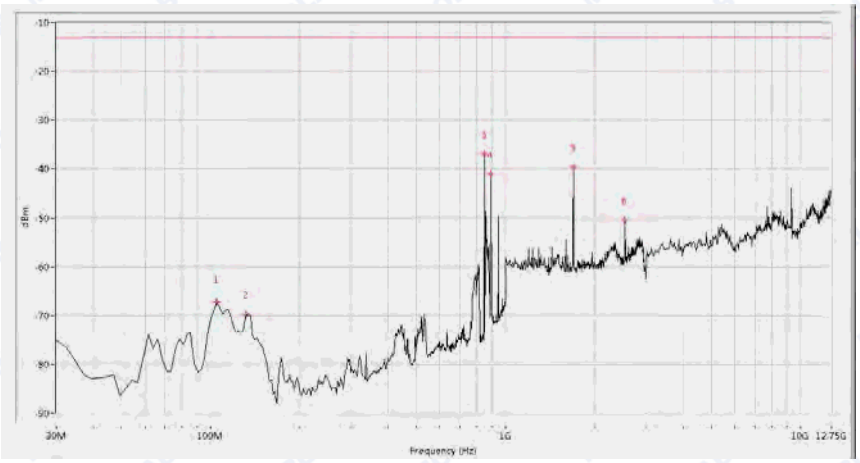

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-67.25	-13.0	54.3	32.6	Horizontal	PASS
131.596	-69.78	-13.0	56.8	254.5	Horizontal	PASS
847.606	-37.00	-13.0	24.0	223.3	Horizontal	N.A
891.147	-41.05	-13.0	28.0	325.4	Horizontal	N.A
1698.254	-39.67	-13.0	26.7	358.1	Horizontal	PASS
2541.147	-50.60	-13.0	37.6	26.4	Horizontal	PASS

(Plot C.5: EGPRS 850MHz Channel = 251, Test Antenna Horizontal)

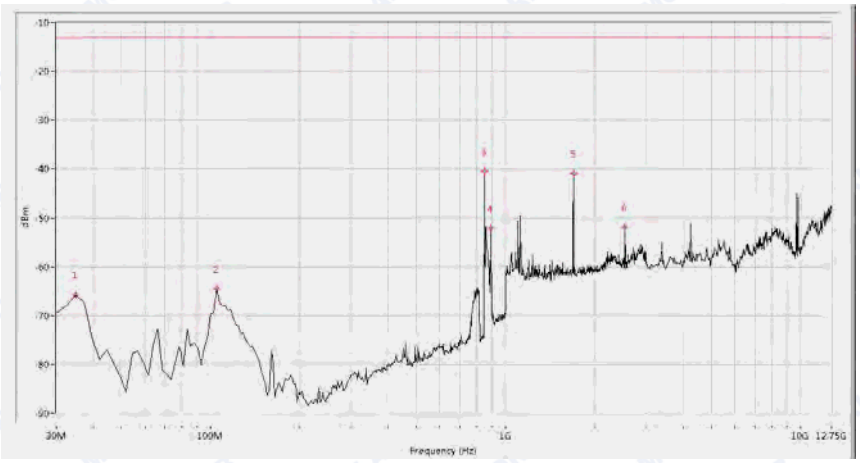

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.79	-13.0	52.8	168.4	Vertical	PASS
104.988	-64.53	-13.0	51.5	164.1	Vertical	PASS
847.606	-40.44	-13.0	27.4	168.4	Vertical	N.A
891.147	-52.07	-13.0	39.1	42.8	Vertical	N.A
1698.254	-40.85	-13.0	27.8	164.7	Vertical	PASS
2541.147	-51.80	-13.0	38.8	78.6	Vertical	PASS

(Plot C.6: EGPRS 850MHz Channel = 251, Test Antenna Vertical)

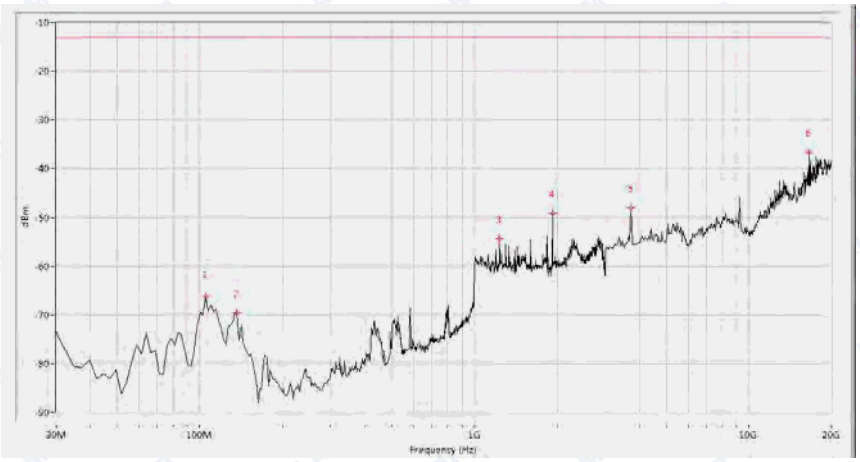

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-66.30	-13.0	53.3	46.8	Horizontal	PASS
136.434	-69.52	-13.0	56.5	97.4	Horizontal	PASS
1234.414	-54.31	-13.0	41.3	7.7	Horizontal	PASS
1927.681	-49.10	-13.0	36.1	273.3	Horizontal	N.A
3720.698	-48.05	-13.0	35.0	143.8	Horizontal	PASS
16523.691	-36.54	-13.0	23.5	83.6	Horizontal	PASS

(Plot D.1: EGPRS 1900MHz Channel = 512, Test Antenna Horizontal)

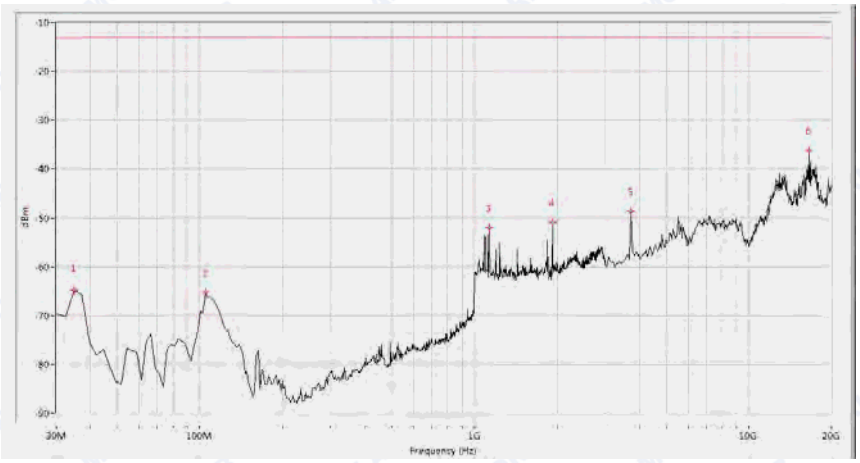

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-64.78	-13.0	51.8	352.6	Vertical	PASS
104.988	-65.24	-13.0	52.2	135.3	Vertical	PASS
1129.676	-51.96	-13.0	39.0	185.1	Vertical	PASS
1927.681	-50.84	-13.0	37.8	302.4	Vertical	N.A
3720.698	-48.58	-13.0	35.6	360.0	Vertical	PASS
16523.691	-36.13	-13.0	23.1	31.6	Vertical	PASS

(Plot D.2: EGPRS 1900MHz Channel = 512, Test Antenna Vertical)

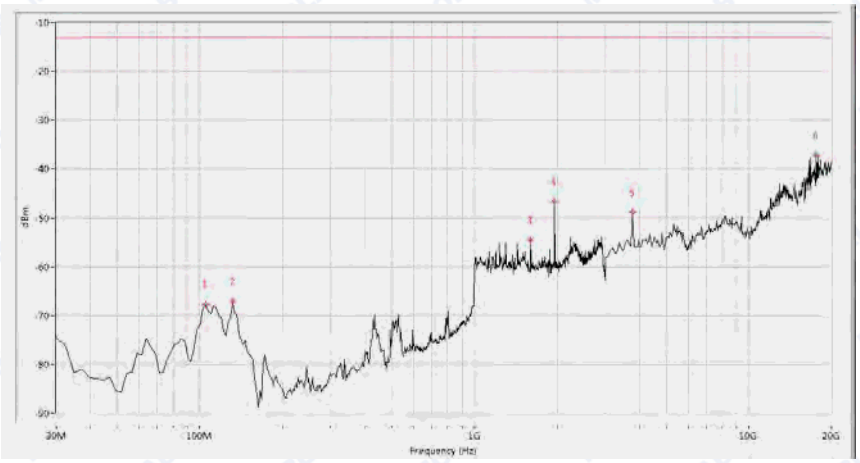

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-67.73	-13.0	54.7	61.0	Horizontal	PASS
131.596	-67.08	-13.0	54.1	211.0	Horizontal	PASS
1598.504	-54.48	-13.0	41.5	43.7	Horizontal	PASS
1957.606	-46.57	-13.0	33.6	159.1	Horizontal	N.A
3763.092	-48.73	-13.0	35.7	157.9	Horizontal	PASS
17583.541	-37.15	-13.0	24.2	244.4	Horizontal	PASS

(Plot D.3: EGPRS 1900MHz Channel = 661, Test Antenna Horizontal)

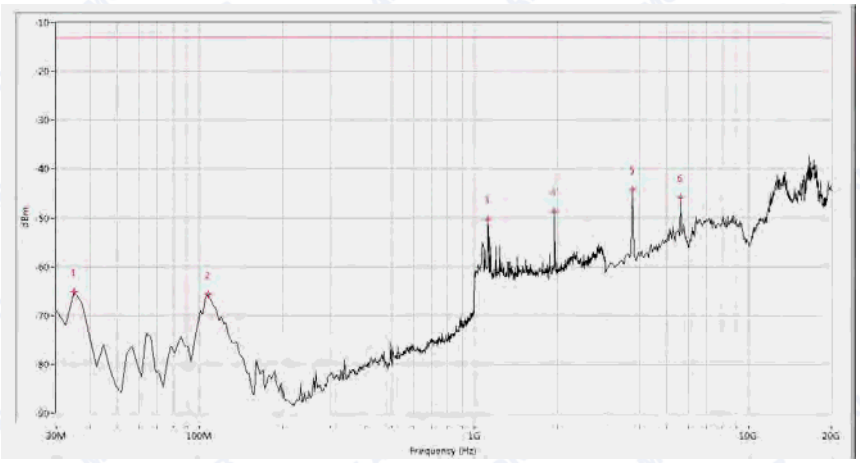

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.07	-13.0	52.1	248.3	Vertical	PASS
107.406	-65.55	-13.0	52.6	134.1	Vertical	PASS
1119.701	-50.31	-13.0	37.3	40.6	Vertical	PASS
1957.606	-48.71	-13.0	35.7	154.1	Vertical	N.A
3763.092	-44.16	-13.0	31.2	93.6	Vertical	PASS
5628.429	-45.75	-13.0	32.8	78.5	Vertical	PASS

(Plot D.4: EGPRS 1900MHz Channel = 661, Test Antenna Vertical)

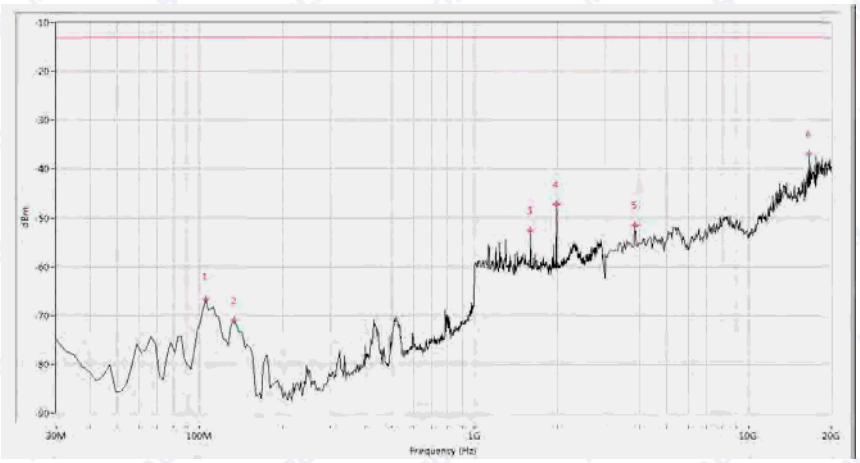

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-66.58	-13.0	53.6	313.2	Horizontal	PASS
134.015	-71.02	-13.0	58.0	264.7	Horizontal	PASS
1598.504	-52.67	-13.0	39.7	36.9	Horizontal	PASS
1987.531	-47.18	-13.0	34.2	233.2	Horizontal	N.A
3847.880	-51.52	-13.0	38.5	18.3	Horizontal	PASS
16523.691	-36.92	-13.0	23.9	358.5	Horizontal	PASS

(Plot D.5: EGPRS 1900MHz Channel = 810, Test Antenna Horizontal)

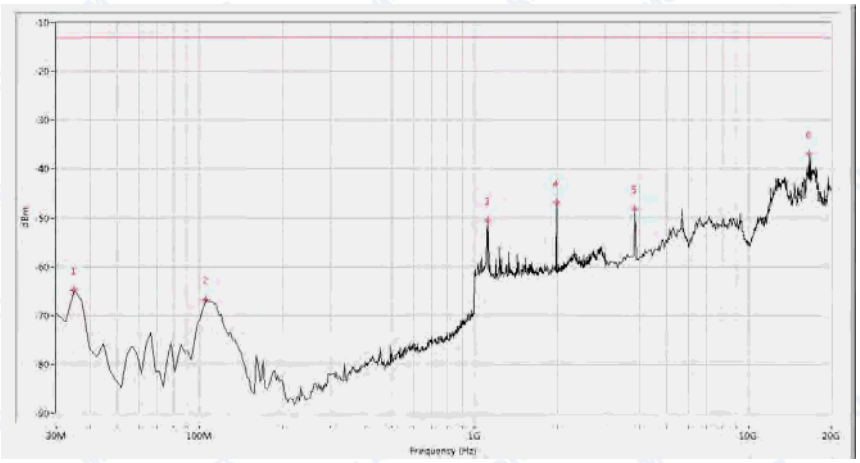

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-64.89	-13.0	51.9	321.2	Vertical	PASS
104.988	-66.67	-13.0	53.7	166.6	Vertical	PASS
1114.713	-50.63	-13.0	37.6	357.1	Vertical	PASS
1987.531	-46.98	-13.0	34.0	219.3	Vertical	N.A
3847.880	-48.10	-13.0	35.1	72.7	Vertical	PASS
16523.691	-36.99	-13.0	24.0	86.0	Vertical	PASS

(Plot D.6: EGPRS 1900MHz Channel = 810, Test Antenna Vertical)

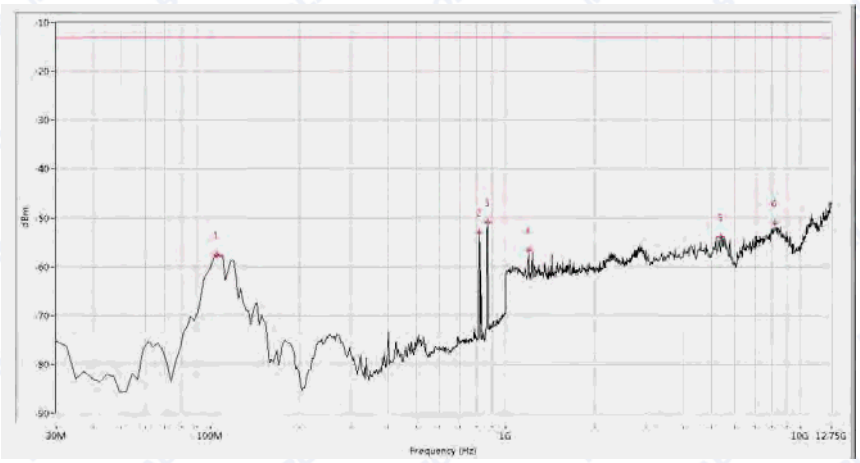

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-57.59	-13.0	44.6	69.9	Horizontal	PASS
816.160	-52.85	-13.0	39.9	74.6	Horizontal	N.A
871.796	-50.89	-13.0	37.9	167.5	Horizontal	N.A
1199.501	-56.53	-13.0	43.5	-0.0	Horizontal	PASS
5382.793	-53.95	-13.0	40.9	37.9	Horizontal	PASS
8178.928	-50.99	-13.0	38.0	317.8	Horizontal	PASS

(Plot E.1: WCDMA 850MHz Channel = 4132, Test Antenna Horizontal)

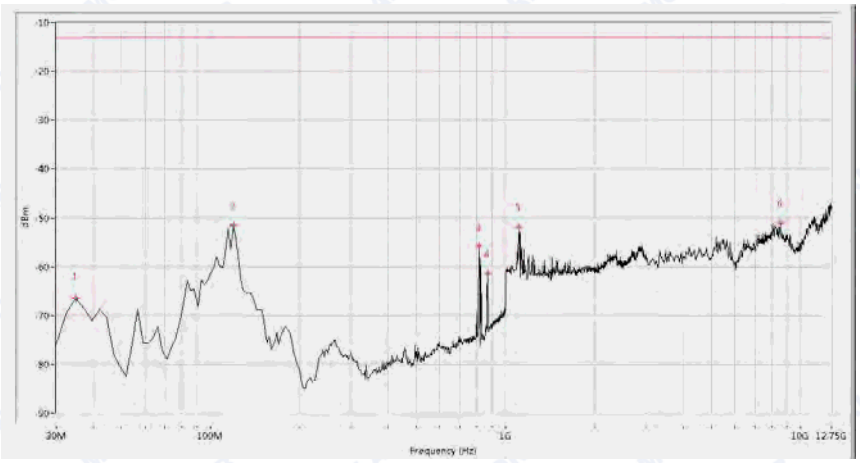

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-66.43	-13.0	53.4	35.6	Vertical	PASS
119.501	-51.49	-13.0	38.5	145.2	Vertical	PASS
813.741	-55.75	-13.0	42.7	10.3	Vertical	N.A
869.377	-61.31	-13.0	48.3	345.9	Vertical	N.A
1109.726	-51.83	-13.0	38.8	360.0	Vertical	PASS
8543.641	-51.09	-13.0	38.1	284.5	Vertical	PASS

(Plot E.2: WCDMA 850MHz Channel = 4132, Test Antenna Vertical)

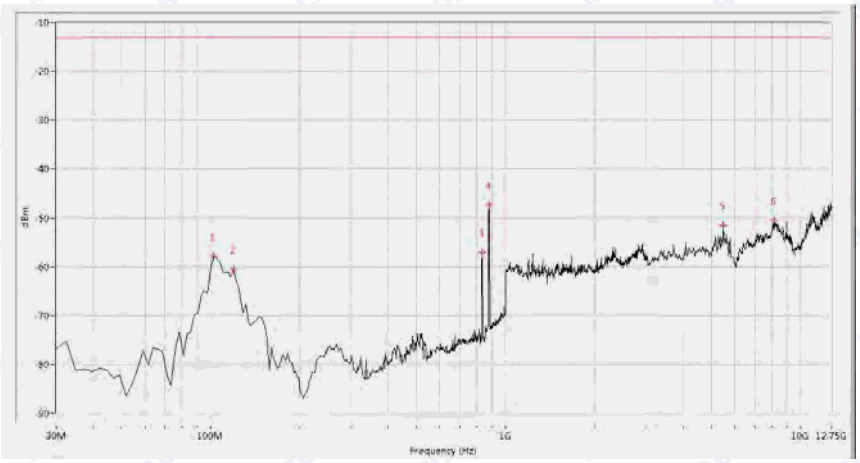

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
102.569	-57.90	-13.0	44.9	81.0	Horizontal	PASS
119.501	-60.50	-13.0	47.5	73.0	Horizontal	PASS
833.092	-57.04	-13.0	44.0	60.3	Horizontal	N.A
879.052	-47.38	-13.0	34.4	268.7	Horizontal	N.A
5480.050	-51.50	-13.0	38.5	272.5	Horizontal	PASS
8130.299	-50.60	-13.0	37.6	356.0	Horizontal	PASS

(Plot E.3: WCDMA 850MHz Channel = 4175, Test Antenna Horizontal)

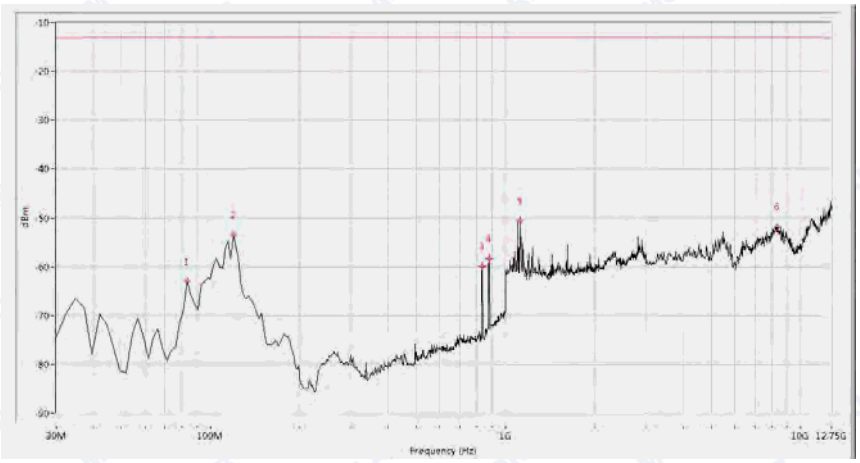

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
83.217	-62.87	-13.0	49.9	181.9	Vertical	PASS
119.501	-53.43	-13.0	40.4	186.0	Vertical	PASS
833.092	-59.83	-13.0	46.8	332.0	Vertical	N.A
879.052	-58.30	-13.0	45.3	345.0	Vertical	N.A
1124.688	-50.57	-13.0	37.6	310.8	Vertical	PASS
8349.127	-51.90	-13.0	38.9	359.4	Vertical	PASS

(Plot E.4: WCDMA 850MHz Channel = 4175, Test Antenna Vertical)

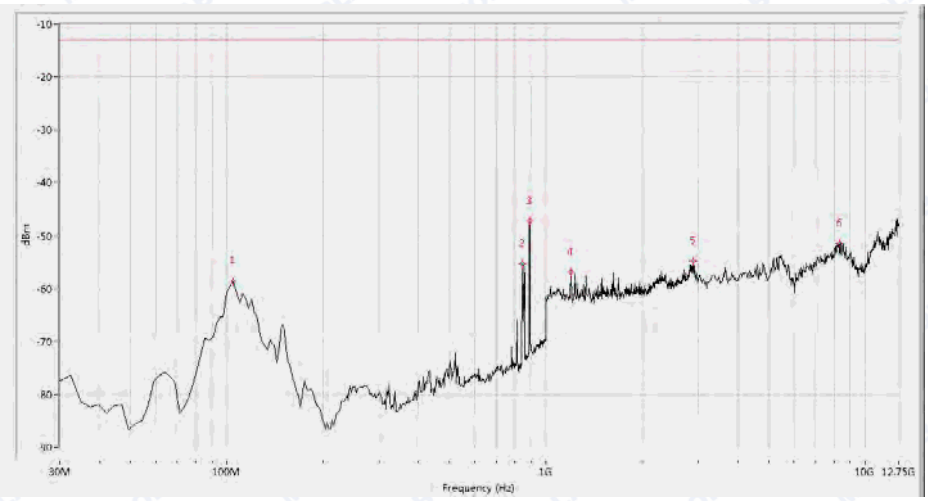

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-58.56	-13.0	45.6	88.4	Horizontal	PASS
845.187	-55.32	-13.0	42.3	71.2	Horizontal	N.A
891.147	-47.23	-13.0	34.2	332.0	Horizontal	N.A
1199.501	-56.95	-13.0	43.9	358.5	Horizontal	PASS
2900.249	-54.89	-13.0	41.9	11.0	Horizontal	PASS
8373.441	-51.52	-13.0	38.5	199.3	Horizontal	PASS

(Plot E.5: WCDMA 850MHz Channel = 4233, Test Antenna Horizontal)

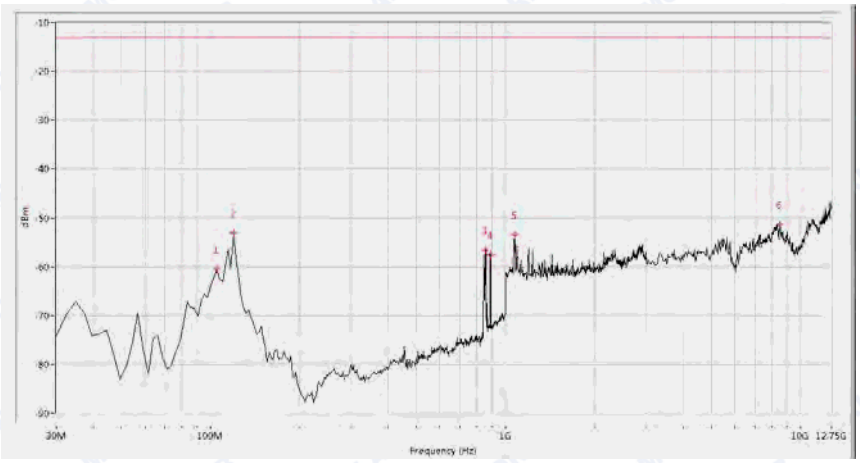

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-60.51	-13.0	47.5	301.1	Vertical	PASS
119.501	-53.17	-13.0	40.2	148.3	Vertical	PASS
854.863	-56.62	-13.0	43.6	87.2	Vertical	N.A
891.147	-57.52	-13.0	44.5	340.4	Vertical	N.A
1074.813	-53.35	-13.0	40.3	281.1	Vertical	PASS
8519.327	-51.36	-13.0	38.4	239.4	Vertical	PASS

(Plot E.6: WCDMA 850MHz Channel = 4233, Test Antenna Vertical)

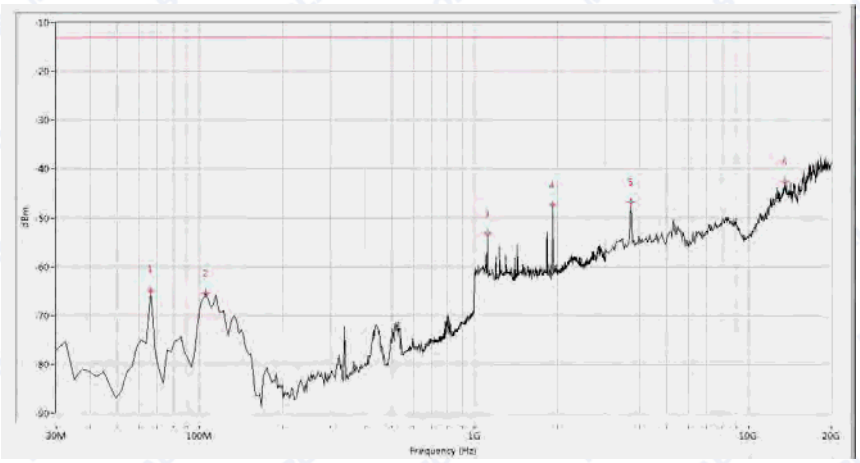

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
66.284	-64.92	-13.0	51.9	297.3	Horizontal	PASS
104.988	-65.45	-13.0	52.5	261.2	Horizontal	PASS
1114.713	-53.32	-13.0	40.3	184.6	Horizontal	PASS
1932.668	-47.40	-13.0	34.4	345.7	Horizontal	N.A
3720.698	-46.67	-13.0	33.7	245.9	Horizontal	PASS
13513.716	-42.59	-13.0	29.6	37.0	Horizontal	PASS

(Plot F.1: WCDMA 1900MHz Channel = 9262, Test Antenna Horizontal)

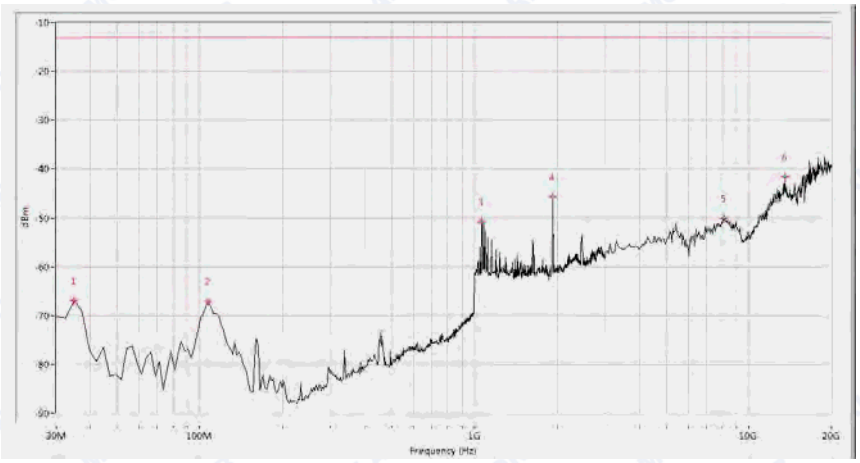

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-66.90	-13.0	53.9	272.3	Vertical	PASS
107.406	-67.02	-13.0	54.0	359.5	Vertical	PASS
1064.838	-50.67	-13.0	37.7	317.9	Vertical	PASS
1932.668	-45.72	-13.0	32.7	348.4	Vertical	N.A
8129.676	-50.15	-13.0	37.1	-0.0	Vertical	PASS
13513.716	-41.58	-13.0	28.6	257.4	Vertical	PASS

(Plot F.2: WCDMA 1900MHz Channel = 9262, Test Antenna Vertical)

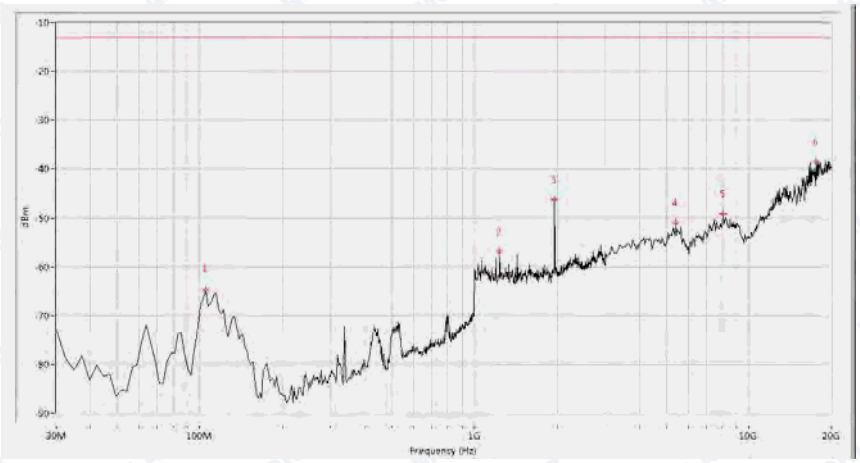

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-64.78	-13.0	51.8	268.2	Horizontal	PASS
1234.414	-56.82	-13.0	43.8	308.8	Horizontal	PASS
1957.606	-46.30	-13.0	33.3	295.5	Horizontal	N.A
5416.459	-51.11	-13.0	38.1	260.0	Horizontal	PASS
8044.888	-49.19	-13.0	36.2	302.5	Horizontal	PASS
17583.541	-38.56	-13.0	25.6	-0.0	Horizontal	PASS

(Plot F.3: WCDMA 1900MHz Channel = 9400, Test Antenna Horizontal)

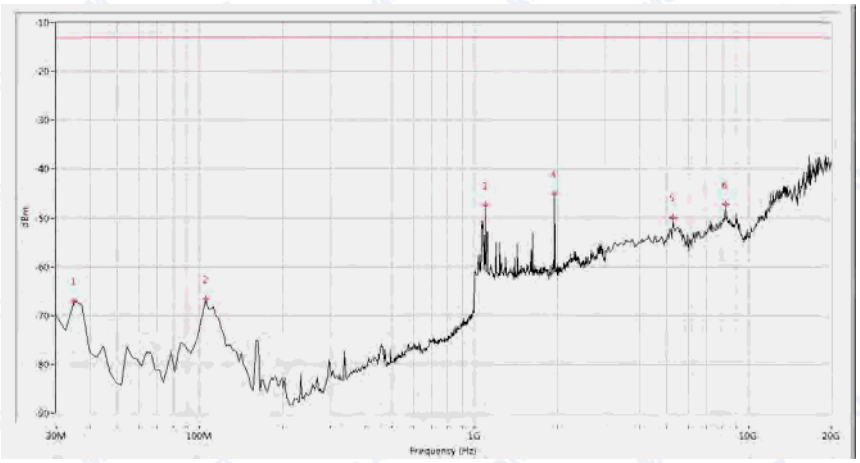

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-67.04	-13.0	54.0	32.0	Vertical	PASS
104.988	-66.61	-13.0	53.6	218.0	Vertical	PASS
1094.763	-47.33	-13.0	34.3	76.3	Vertical	PASS
1957.606	-44.99	-13.0	32.0	148.6	Vertical	N.A
5289.277	-49.93	-13.0	36.9	360.0	Vertical	PASS
8214.464	-47.24	-13.0	34.2	129.6	Vertical	PASS

(Plot F.4: WCDMA 1900MHz Channel = 9400, Test Antenna Vertical)

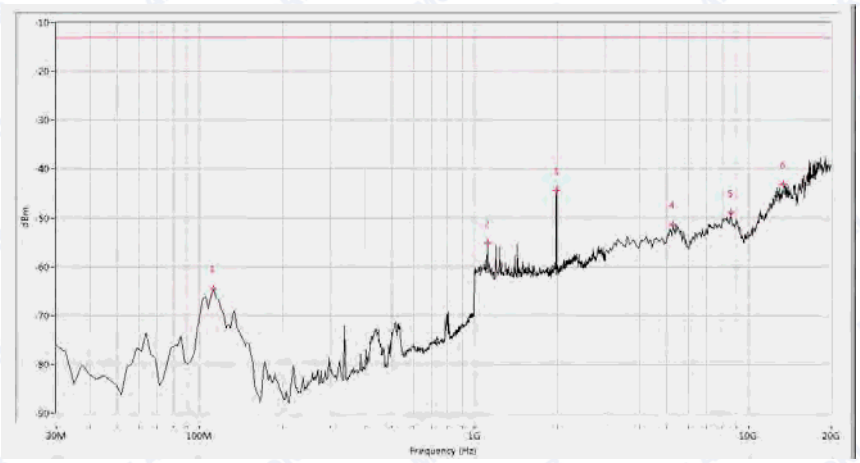

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
112.244	-64.47	-13.0	51.5	277.3	Horizontal	PASS
1114.713	-55.15	-13.0	42.2	98.9	Horizontal	PASS
1987.531	-44.30	-13.0	31.3	240.1	Horizontal	N.A
5289.277	-51.42	-13.0	38.4	-0.0	Horizontal	PASS
8596.010	-49.01	-13.0	36.0	201.9	Horizontal	PASS
13386.534	-43.13	-13.0	30.1	253.3	Horizontal	PASS

(Plot F.5: WCDMA 1900MHz Channel = 9538, Test Antenna Horizontal)

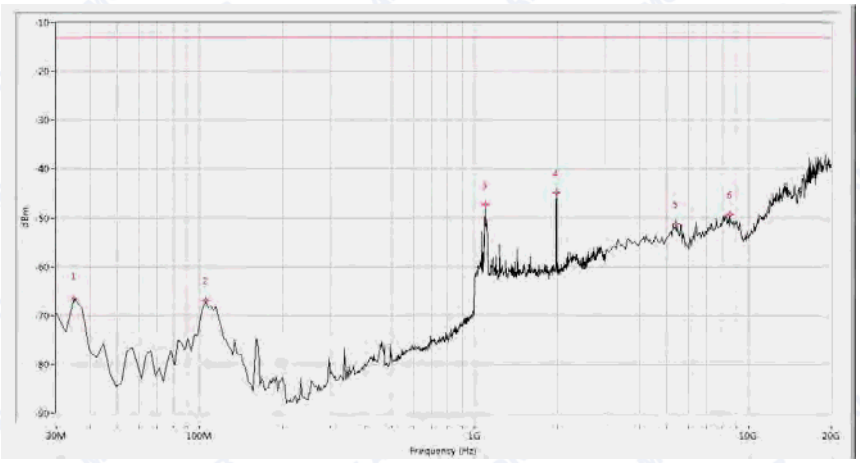

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-66.56	-13.0	53.6	163.6	Vertical	PASS
104.988	-66.86	-13.0	53.9	336.3	Vertical	PASS
1094.763	-47.25	-13.0	34.2	81.4	Vertical	PASS
1987.531	-44.80	-13.0	31.8	145.9	Vertical	N.A
5416.459	-51.11	-13.0	38.1	360.0	Vertical	PASS
8553.616	-49.24	-13.0	36.2	206.4	Vertical	PASS

(Plot F.6: WCDMA 1900MHz Channel = 9538, Test Antenna Vertical)

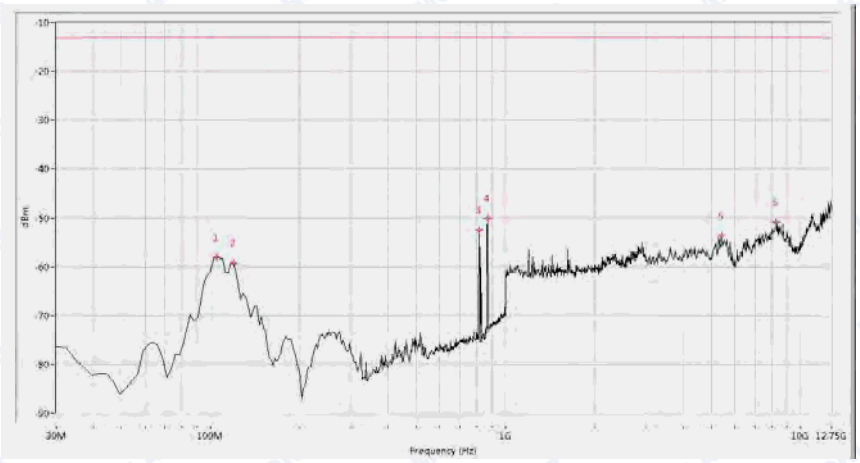

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-58.02	-13.0	45.0	82.9	Horizontal	PASS
119.501	-59.26	-13.0	46.3	248.7	Horizontal	PASS
816.160	-52.43	-13.0	39.4	78.6	Horizontal	N.A
869.377	-50.08	-13.0	37.1	203.6	Horizontal	N.A
5407.107	-53.78	-13.0	40.8	151.7	Horizontal	PASS
8251.870	-50.79	-13.0	37.8	112.8	Horizontal	PASS

(Plot G.1: HSDPA 850MHz Channel = 4132, Test Antenna Horizontal)

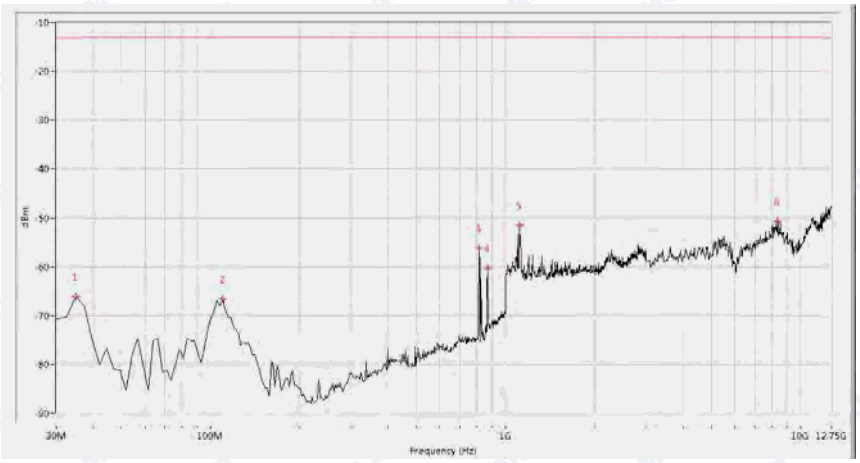

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-66.03	-13.0	53.0	200.8	Vertical	PASS
109.825	-66.57	-13.0	53.6	323.3	Vertical	PASS
816.160	-56.06	-13.0	43.1	85.7	Vertical	N.A
869.377	-60.23	-13.0	47.2	341.5	Vertical	N.A
1114.713	-51.58	-13.0	38.6	60.9	Vertical	PASS
8349.127	-50.77	-13.0	37.8	77.0	Vertical	PASS

(Plot G.2: HSDPA 850MHz Channel = 4132, Test Antenna Vertical)

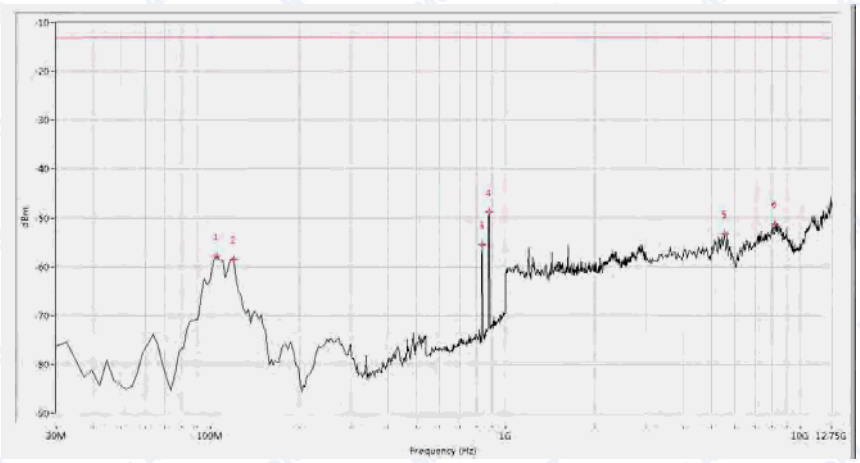

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-57.81	-13.0	44.8	76.7	Horizontal	PASS
119.501	-58.49	-13.0	45.5	272.7	Horizontal	PASS
833.092	-55.43	-13.0	42.4	67.5	Horizontal	N.A
879.052	-48.77	-13.0	35.8	360.0	Horizontal	N.A
5528.678	-53.25	-13.0	40.3	-0.0	Horizontal	PASS
8203.242	-51.19	-13.0	38.2	-0.0	Horizontal	PASS

(Plot G.3: HSDPA 850MHz Channel = 4175, Test Antenna Horizontal)

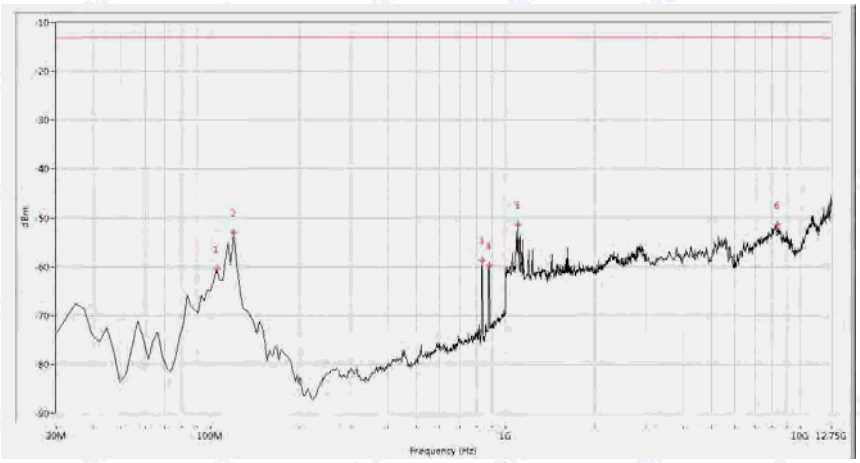

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-60.49	-13.0	47.5	204.4	Vertical	PASS
119.501	-52.99	-13.0	40.0	155.4	Vertical	PASS
835.511	-58.69	-13.0	45.7	68.7	Vertical	N.A
879.052	-59.79	-13.0	46.8	326.1	Vertical	N.A
1099.751	-51.32	-13.0	38.3	135.7	Vertical	PASS
8349.127	-51.35	-13.0	38.3	217.5	Vertical	PASS

(Plot G.4: HSDPA 850MHz Channel = 4175, Test Antenna Vertical)

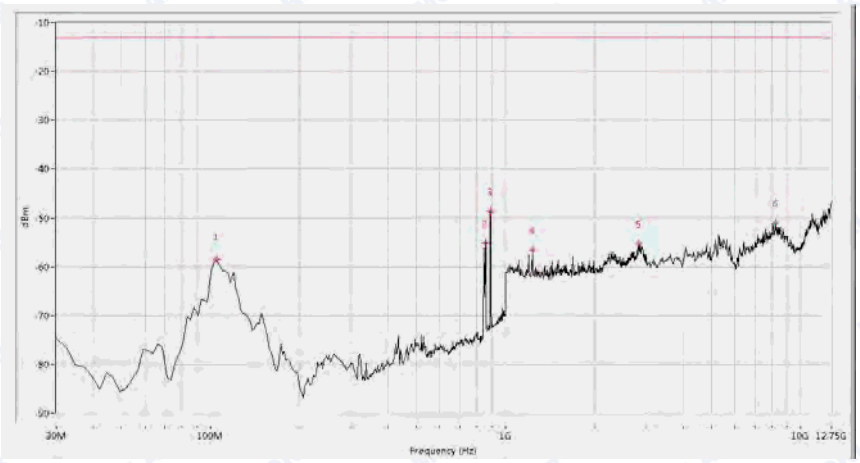

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-58.52	-13.0	45.5	80.7	Horizontal	PASS
854.863	-55.08	-13.0	42.1	80.7	Horizontal	N.A
891.147	-48.61	-13.0	35.6	3.9	Horizontal	N.A
1234.414	-56.54	-13.0	43.5	115.0	Horizontal	PASS
2825.436	-55.26	-13.0	42.3	89.1	Horizontal	PASS
8227.556	-51.00	-13.0	38.0	225.2	Horizontal	PASS

(Plot G.5: HSDPA 850MHz Channel = 4233, Test Antenna Horizontal)

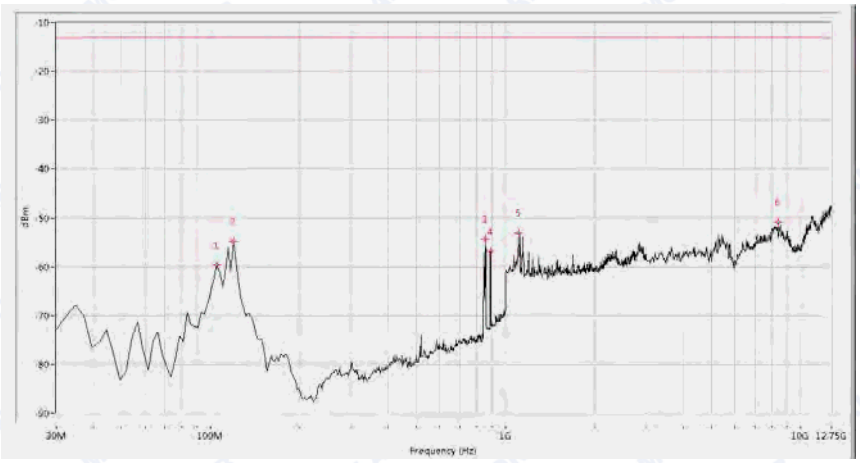

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-59.52	-13.0	46.5	209.4	Vertical	PASS
119.501	-54.87	-13.0	41.9	192.1	Vertical	PASS
854.863	-54.43	-13.0	41.4	86.9	Vertical	N.A
891.147	-56.94	-13.0	43.9	344.4	Vertical	N.A
1109.726	-53.09	-13.0	40.1	311.7	Vertical	PASS
8397.756	-50.92	-13.0	37.9	194.6	Vertical	PASS

(Plot G.6: HSDPA 850MHz Channel = 4233, Test Antenna Vertical)

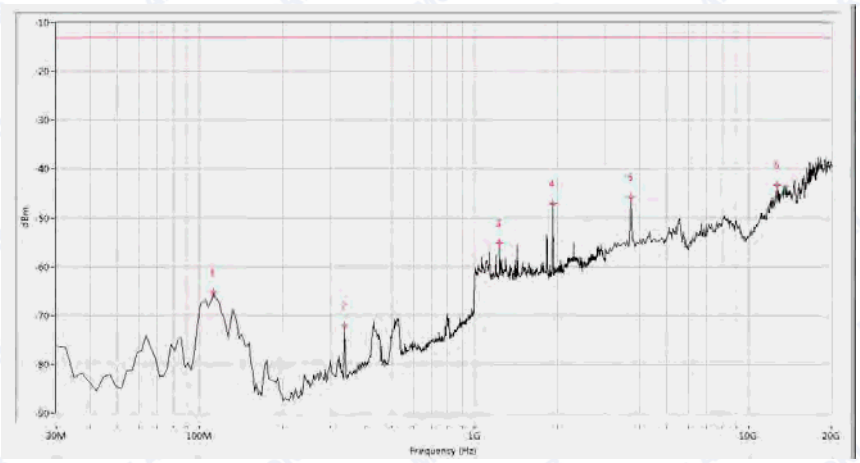

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
112.244	-65.30	-13.0	52.3	268.3	Horizontal	PASS
337.207	-72.14	-13.0	59.1	268.3	Horizontal	PASS
1234.414	-55.20	-13.0	42.2	156.5	Horizontal	PASS
1932.668	-47.03	-13.0	34.0	341.5	Horizontal	N.A
3720.698	-45.87	-13.0	32.9	238.5	Horizontal	PASS
12708.229	-43.35	-13.0	30.3	227.1	Horizontal	PASS

(Plot H.1: HSDPA 1900 MHz Channel = 9262, Test Antenna Horizontal)

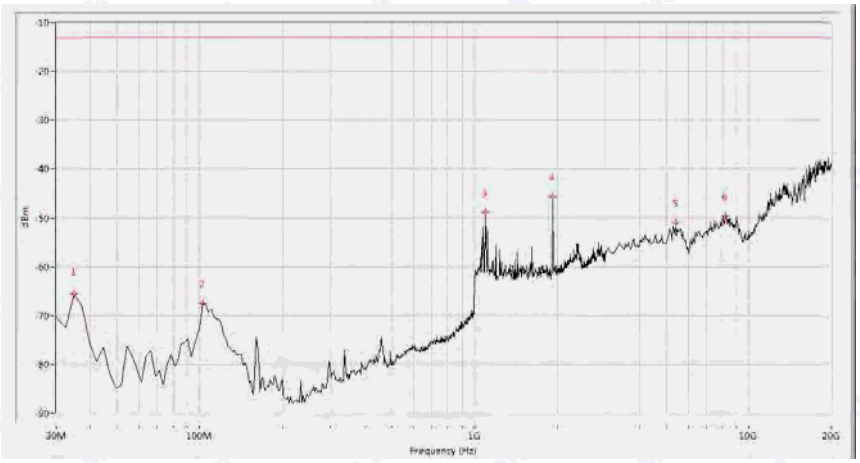

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.65	-13.0	52.7	164.6	Vertical	PASS
102.569	-67.46	-13.0	54.5	144.1	Vertical	PASS
1094.763	-48.76	-13.0	35.8	341.1	Vertical	PASS
1932.668	-45.69	-13.0	32.7	316.9	Vertical	N.A
5416.459	-51.08	-13.0	38.1	316.0	Vertical	PASS
8214.464	-49.58	-13.0	36.6	281.4	Vertical	PASS

(Plot H.2: HSDPA 1900 MHz Channel = 9262, Test Antenna Vertical)

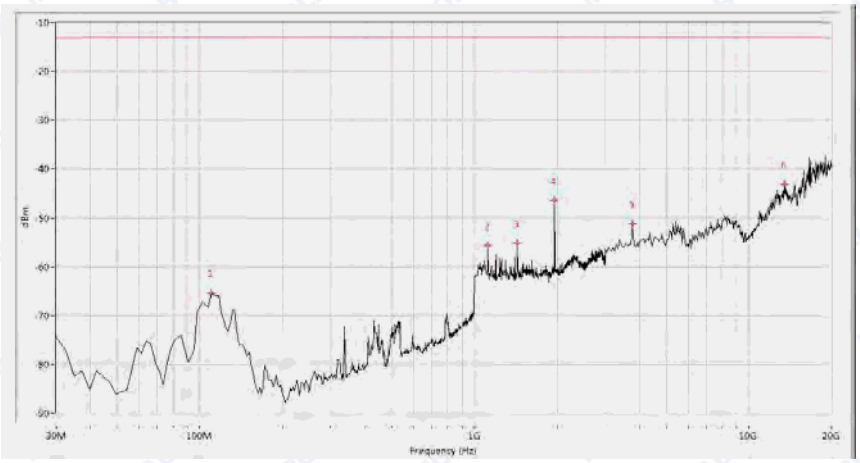

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
109.825	-65.37	-13.0	52.4	73.0	Horizontal	PASS
1119.701	-55.55	-13.0	42.5	358.2	Horizontal	PASS
1433.915	-55.09	-13.0	42.1	206.4	Horizontal	PASS
1957.606	-46.41	-13.0	33.4	300.0	Horizontal	N.A
3763.092	-51.12	-13.0	38.1	55.3	Horizontal	PASS
13471.322	-43.17	-13.0	30.2	360.0	Horizontal	PASS

(PlotH.3:HSDPA 1900 MHz Channel = 9400, Test Antenna Horizontal)

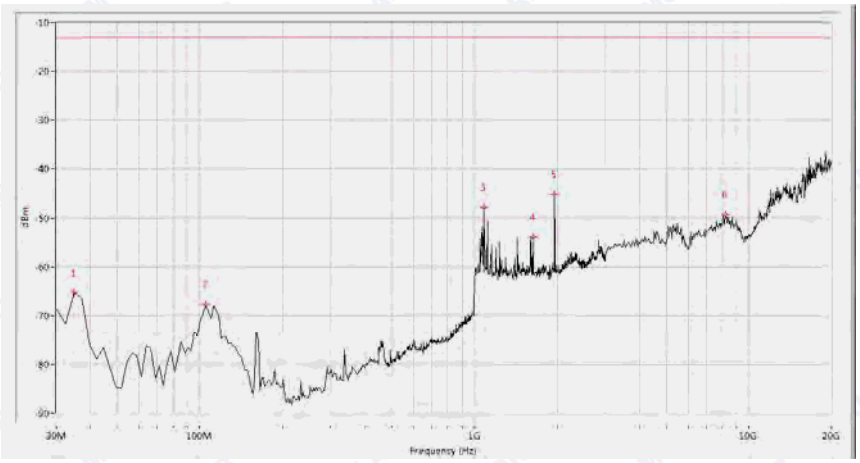

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.23	-13.0	52.2	249.6	Vertical	PASS
104.988	-67.74	-13.0	54.7	190.3	Vertical	PASS
1079.800	-47.85	-13.0	34.9	360.0	Vertical	PASS
1638.404	-53.88	-13.0	40.9	87.1	Vertical	PASS
1957.606	-45.09	-13.0	32.1	225.2	Vertical	N.A
8214.464	-49.22	-13.0	36.2	312.3	Vertical	PASS

(Plot H.4: HSDPA 1900 MHz Channel = 9400, Test Antenna Vertical)

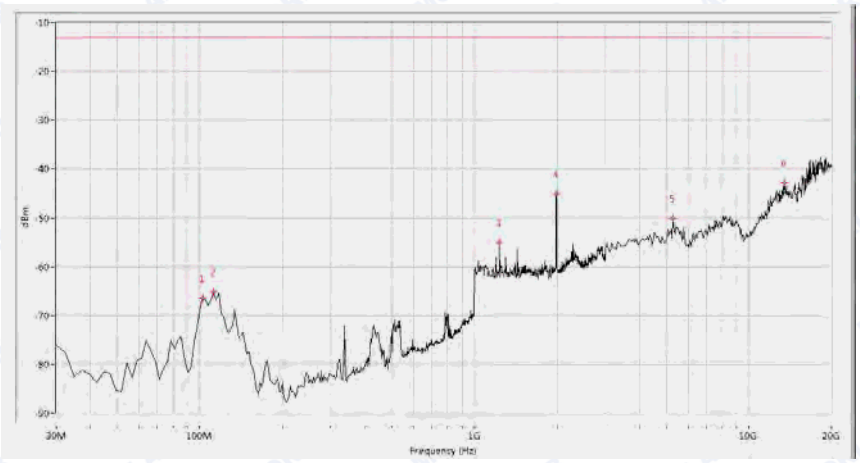

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
102.569	-66.33	-13.0	53.3	252.6	Horizontal	PASS
112.244	-65.06	-13.0	52.1	277.1	Horizontal	PASS
1234.414	-55.05	-13.0	42.0	232.2	Horizontal	PASS
1987.531	-45.00	-13.0	32.0	60.7	Horizontal	N.A
5289.277	-50.08	-13.0	37.1	214.6	Horizontal	PASS
13471.322	-42.74	-13.0	29.7	285.4	Horizontal	PASS

(Plot H.5: HSDPA 1900 MHz Channel = 9538, Test Antenna Horizontal)

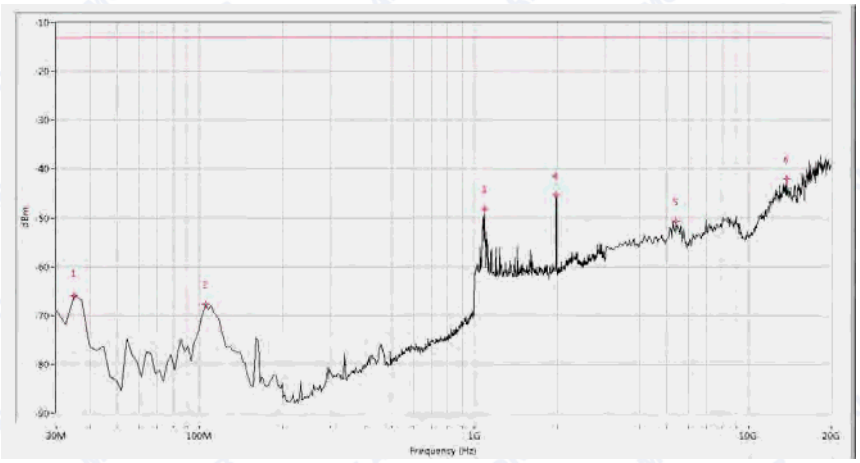

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.92	-13.0	52.9	64.9	Vertical	PASS
104.988	-67.61	-13.0	54.6	199.2	Vertical	PASS
1089.776	-48.11	-13.0	35.1	280.3	Vertical	PASS
1982.544	-45.34	-13.0	32.3	142.0	Vertical	N.A
5416.459	-50.68	-13.0	37.7	353.3	Vertical	PASS
13683.292	-41.99	-13.0	29.0	314.3	Vertical	PASS

(Plot H.6: HSDPA 1900 MHz Channel = 9538, Test Antenna Vertical)

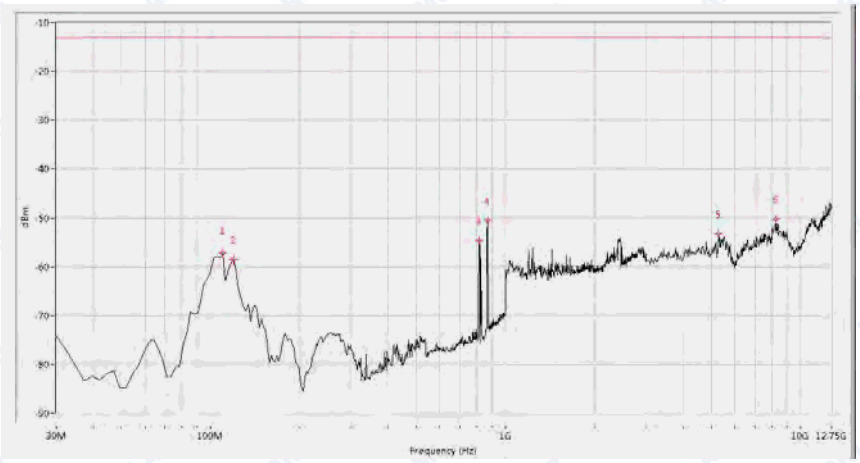

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
109.825	-57.24	-13.0	44.2	261.1	Horizontal	PASS
119.501	-58.46	-13.0	45.5	257.1	Horizontal	PASS
816.160	-54.74	-13.0	41.7	75.0	Horizontal	N.A
871.796	-50.49	-13.0	37.5	199.0	Horizontal	N.A
5285.536	-53.24	-13.0	40.2	266.8	Horizontal	PASS
8227.556	-50.21	-13.0	37.2	142.1	Horizontal	PASS

(Plot I.1: HSUPA 850MHz Channel = 4132, Test Antenna Horizontal)

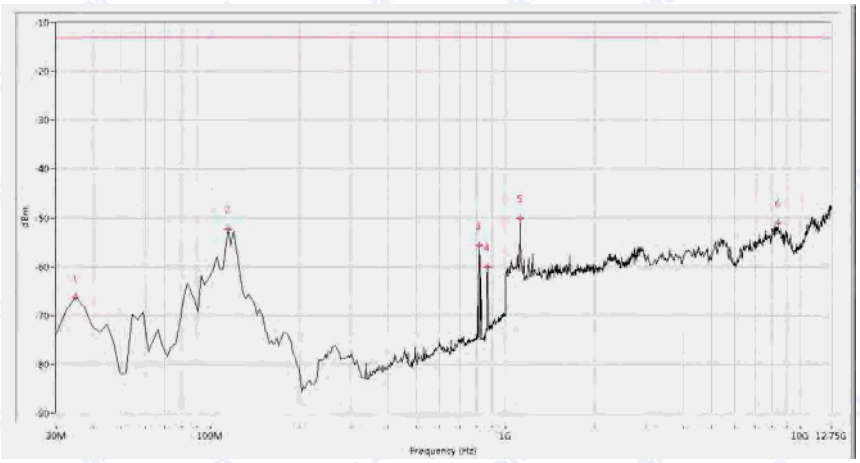

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-66.21	-13.0	53.2	316.9	Vertical	PASS
114.663	-52.37	-13.0	39.4	168.3	Vertical	PASS
813.741	-55.66	-13.0	42.7	10.6	Vertical	N.A
871.796	-60.10	-13.0	47.1	333.9	Vertical	N.A
1119.701	-50.03	-13.0	37.0	309.5	Vertical	PASS
8397.756	-51.11	-13.0	38.1	179.9	Vertical	PASS

(Plot I.2: HSUPA 850 MHz Channel = 4132, Test Antenna Vertical)

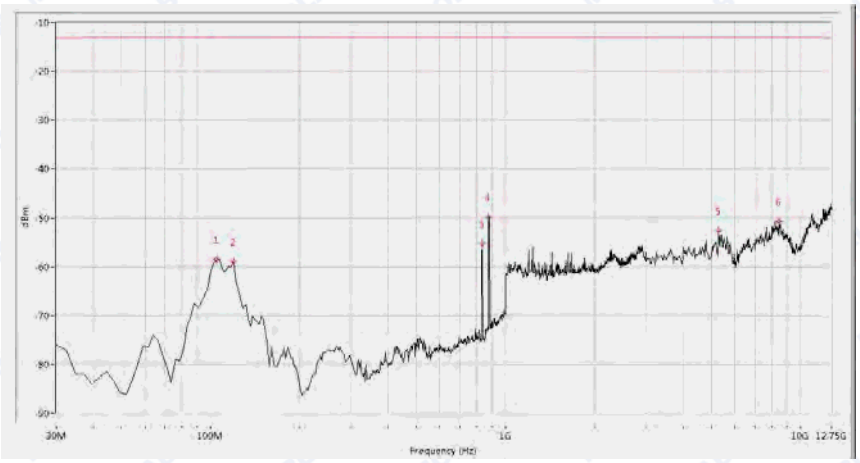

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-58.41	-13.0	45.4	79.5	Horizontal	PASS
119.501	-59.00	-13.0	46.0	268.1	Horizontal	PASS
833.092	-55.33	-13.0	42.3	75.2	Horizontal	N.A
876.633	-49.71	-13.0	36.7	88.5	Horizontal	N.A
5285.536	-52.67	-13.0	39.7	288.2	Horizontal	PASS
8470.698	-50.76	-13.0	37.8	264.1	Horizontal	PASS

(Plot I.3: HSUPA 850MHz Channel = 4175, Test Antenna Horizontal)

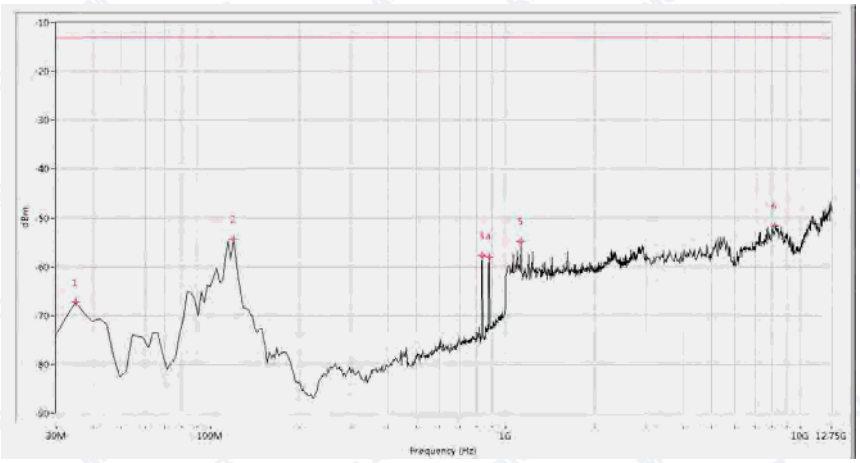

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-67.24	-13.0	54.2	285.8	Vertical	PASS
119.501	-54.38	-13.0	41.4	178.0	Vertical	PASS
833.092	-57.68	-13.0	44.7	2.0	Vertical	N.A
879.052	-57.95	-13.0	45.0	336.7	Vertical	N.A
1129.676	-54.76	-13.0	41.8	150.8	Vertical	PASS
8203.242	-51.72	-13.0	38.7	316.3	Vertical	PASS

(Plot I.4: HSUPA 850MHz Channel = 4175, Test Antenna Vertical)

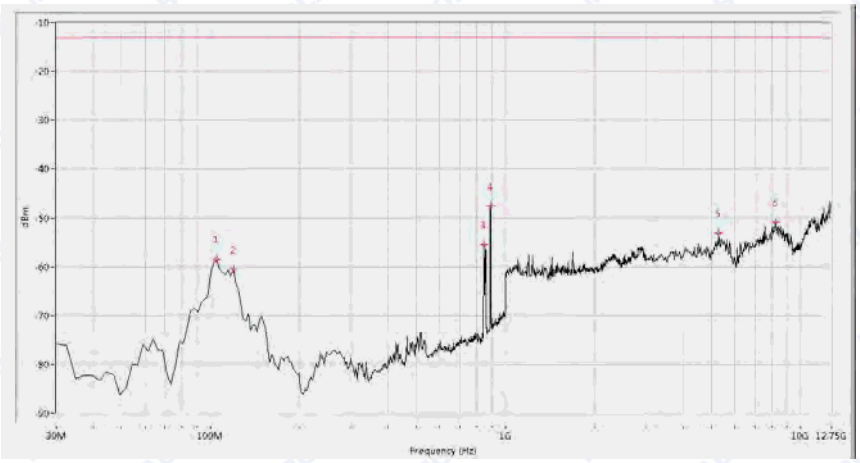

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-58.51	-13.0	45.5	63.1	Horizontal	PASS
119.501	-60.55	-13.0	47.5	268.7	Horizontal	PASS
845.187	-55.53	-13.0	42.5	58.5	Horizontal	N.A
891.147	-47.53	-13.0	34.5	-0.0	Horizontal	N.A
5285.536	-53.03	-13.0	40.0	40.6	Horizontal	PASS
8227.556	-50.85	-13.0	37.8	174.3	Horizontal	PASS

(Plot I.5: HSUPA 850MHz Channel = 4233, Test Antenna Horizontal)

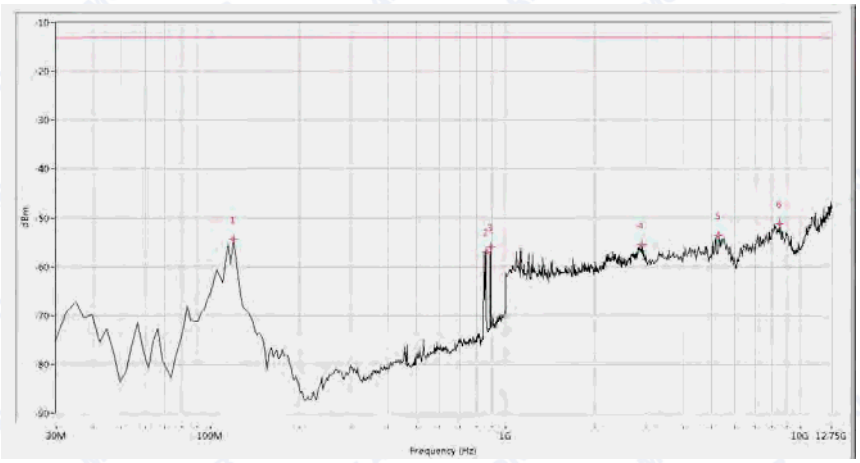

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
119.501	-54.33	-13.0	41.3	139.6	Vertical	PASS
857.282	-57.09	-13.0	44.1	193.1	Vertical	N.A
891.147	-55.89	-13.0	42.9	340.0	Vertical	N.A
2900.249	-55.47	-13.0	42.5	15.0	Vertical	PASS
5285.536	-53.58	-13.0	40.6	302.6	Vertical	PASS
8519.327	-51.18	-13.0	38.2	-0.0	Vertical	PASS

(Plot I.6: HSUPA 850MHz Channel = 4233, Test Antenna Vertical)

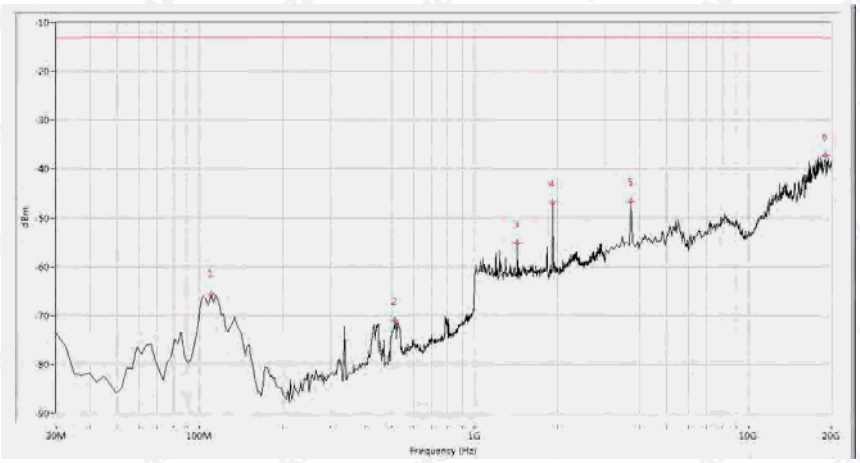

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
109.825	-65.73	-13.0	52.7	72.6	Horizontal	PASS
513.791	-71.01	-13.0	58.0	112.4	Horizontal	PASS
1433.915	-55.19	-13.0	42.2	188.8	Horizontal	PASS
1932.668	-46.86	-13.0	33.9	103.2	Horizontal	N.A
3720.698	-46.55	-13.0	33.5	243.7	Horizontal	PASS
18982.544	-37.18	-13.0	24.2	122.2	Horizontal	PASS

(Plot J.1: HSUPA 1900 MHz Channel = 9262, Test Antenna Horizontal)

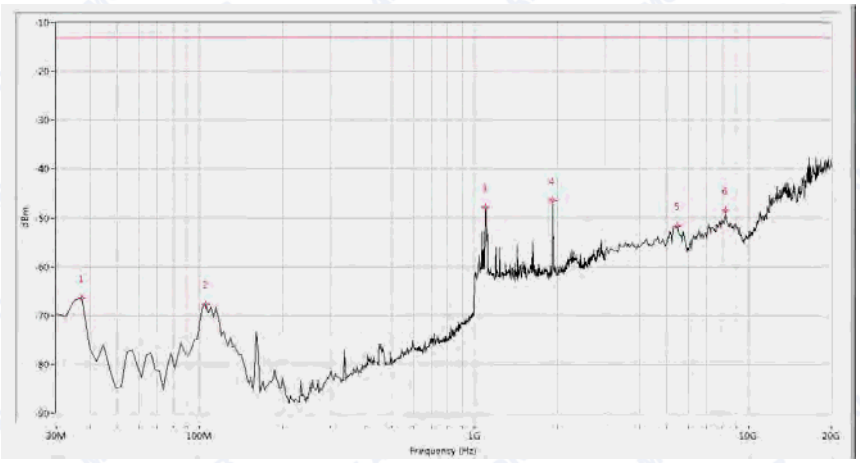

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
37.257	-66.44	-13.0	53.4	118.2	Vertical	PASS
104.988	-67.60	-13.0	54.6	208.5	Vertical	PASS
1099.751	-47.88	-13.0	34.9	360.0	Vertical	PASS
1932.668	-46.41	-13.0	33.4	127.3	Vertical	N.A
5501.247	-51.61	-13.0	38.6	139.6	Vertical	PASS
8214.464	-48.56	-13.0	35.6	90.5	Vertical	PASS

(Plot J.2: HSUPA 1900 MHz Channel = 9262, Test Antenna Vertical)

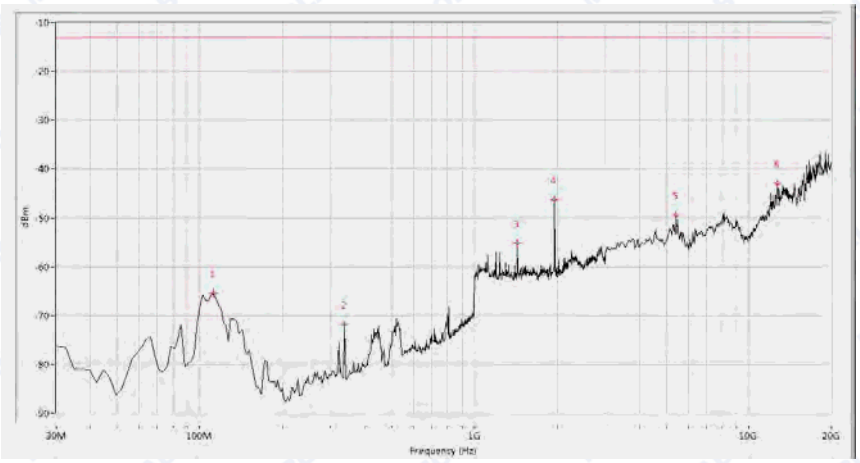

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
112.244	-65.46	-13.0	52.5	235.0	Horizontal	PASS
337.207	-71.85	-13.0	58.8	263.5	Horizontal	PASS
1433.915	-55.21	-13.0	42.2	75.0	Horizontal	PASS
1957.606	-46.20	-13.0	33.2	61.2	Horizontal	N.A
5416.459	-49.41	-13.0	36.4	89.2	Horizontal	PASS
12708.229	-42.91	-13.0	29.9	242.3	Horizontal	PASS

(Plot J.3: HSUPA 1900 MHz Channel = 9400, Test Antenna Horizontal)

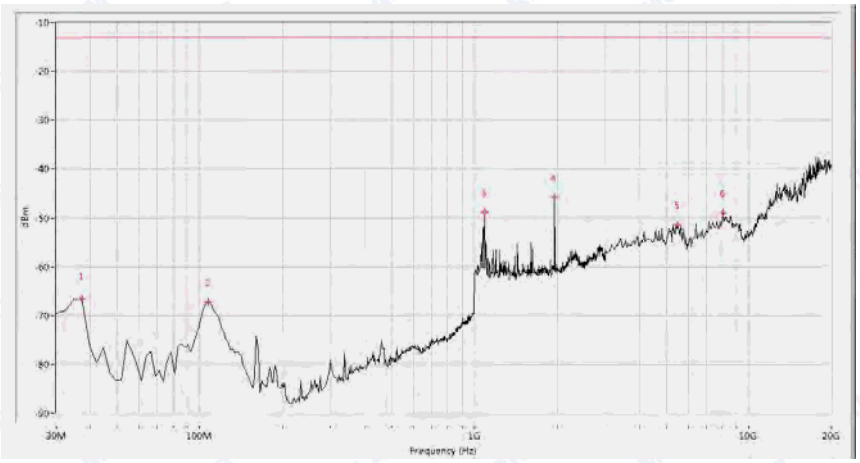

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
37.257	-66.57	-13.0	53.6	194.5	Vertical	PASS
107.406	-67.22	-13.0	54.2	346.9	Vertical	PASS
1089.776	-48.88	-13.0	35.9	99.7	Vertical	PASS
1957.606	-45.77	-13.0	32.8	145.4	Vertical	N.A
5501.247	-51.40	-13.0	38.4	19.7	Vertical	PASS
8044.888	-48.97	-13.0	36.0	185.6	Vertical	PASS

(Plot J.4: HSUPA 1900 MHz Channel = 9400, Test Antenna Vertical)

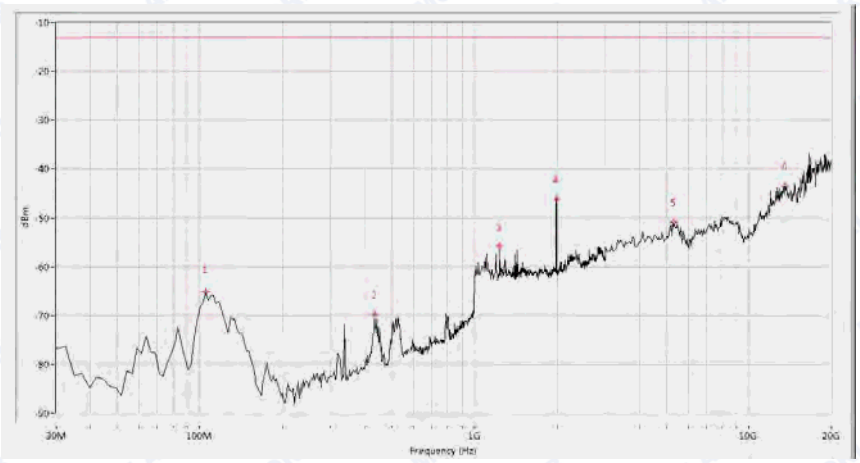

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-65.15	-13.0	52.2	71.8	Horizontal	PASS
433.965	-69.69	-13.0	56.7	113.8	Horizontal	PASS
1234.414	-55.82	-13.0	42.8	264.2	Horizontal	PASS
1987.531	-46.19	-13.0	33.2	282.7	Horizontal	N.A
5331.671	-50.88	-13.0	37.9	217.2	Horizontal	PASS
13513.716	-43.46	-13.0	30.5	320.9	Horizontal	PASS

(Plot J.5: HSUPA 1900 MHz Channel = 9538, Test Antenna Horizontal)

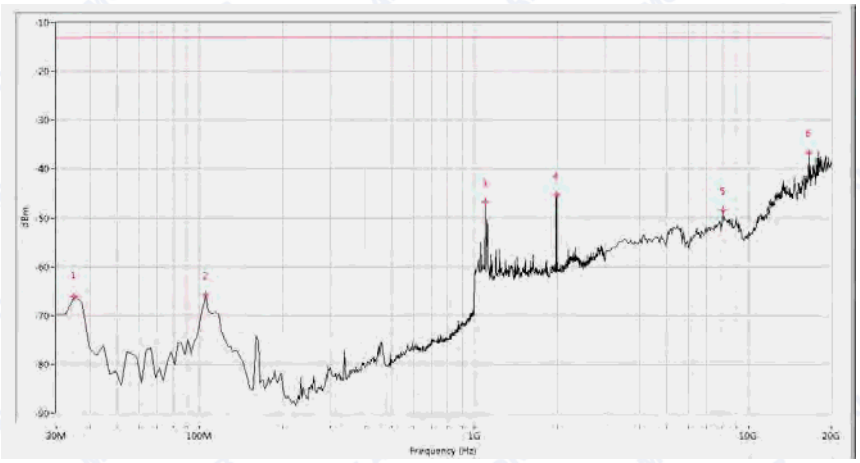

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-66.15	-13.0	53.2	265.0	Vertical	PASS
104.988	-65.81	-13.0	52.8	164.9	Vertical	PASS
1099.751	-46.77	-13.0	33.8	173.3	Vertical	PASS
1987.531	-45.30	-13.0	32.3	314.8	Vertical	N.A
8044.888	-48.53	-13.0	35.5	246.9	Vertical	PASS
16523.691	-36.61	-13.0	23.6	303.1	Vertical	PASS

(Plot J.6: HSUPA 1900 MHz Channel = 9538, Test Antenna Vertical)

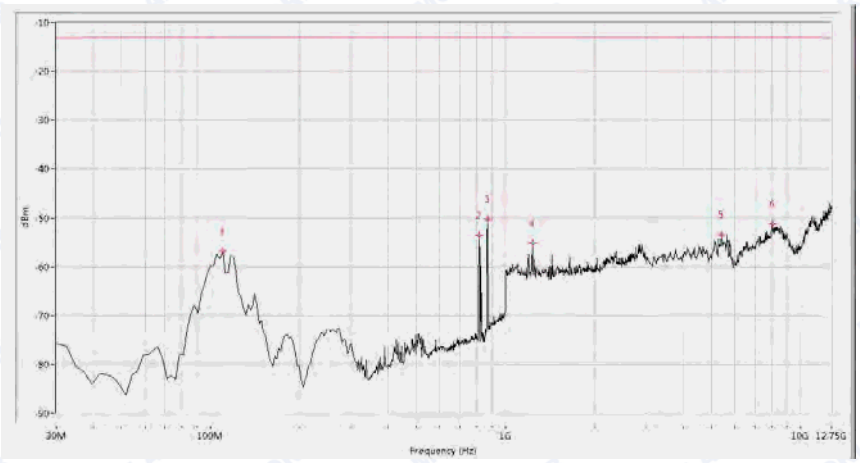

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
109.825	-56.94	-13.0	43.9	266.2	Horizontal	PASS
813.741	-53.56	-13.0	40.6	71.8	Horizontal	N.A
871.796	-50.24	-13.0	37.2	308.8	Horizontal	N.A
1234.414	-55.16	-13.0	42.2	128.0	Horizontal	PASS
5407.107	-53.34	-13.0	40.3	285.4	Horizontal	PASS
8033.042	-51.16	-13.0	38.2	245.9	Horizontal	PASS

(Plot K.1: HSPA+ 850MHz Channel = 4132, Test Antenna Horizontal)

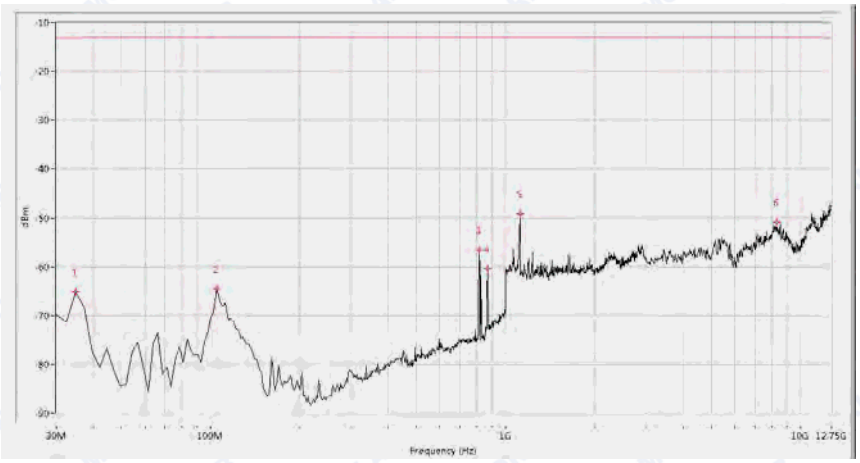

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.11	-13.0	52.1	21.2	Vertical	PASS
104.988	-64.56	-13.0	51.6	258.5	Vertical	PASS
813.741	-56.58	-13.0	43.6	81.6	Vertical	N.A
869.377	-60.40	-13.0	47.4	324.0	Vertical	N.A
1119.701	-49.16	-13.0	36.2	78.9	Vertical	PASS
8324.813	-50.90	-13.0	37.9	89.3	Vertical	PASS

(Plot K.2: HSPA+ 850 MHz Channel = 4132, Test Antenna Vertical)

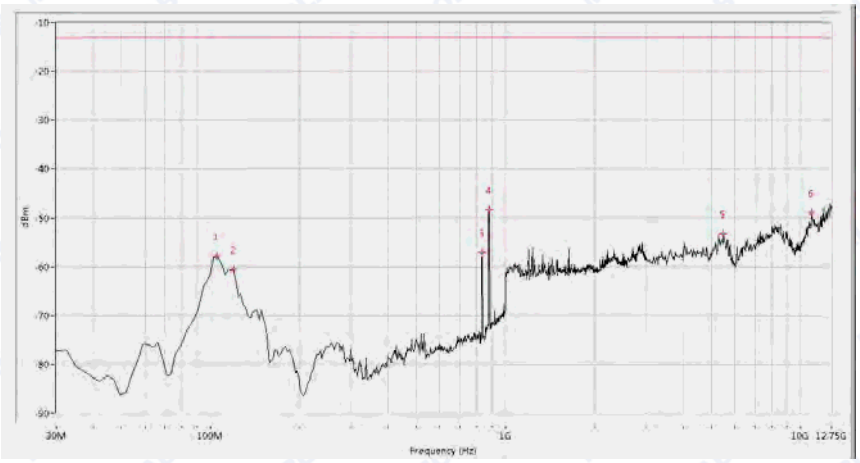

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-57.88	-13.0	44.9	90.3	Horizontal	PASS
119.501	-60.53	-13.0	47.5	86.0	Horizontal	PASS
833.092	-57.12	-13.0	44.1	55.7	Horizontal	N.A
879.052	-48.41	-13.0	35.4	120.5	Horizontal	N.A
5480.050	-53.20	-13.0	40.2	-0.0	Horizontal	PASS
10926.434	-48.98	-13.0	36.0	-0.0	Horizontal	PASS

(Plot K.3: HSPA+ 850MHz Channel = 4175, Test Antenna Horizontal)

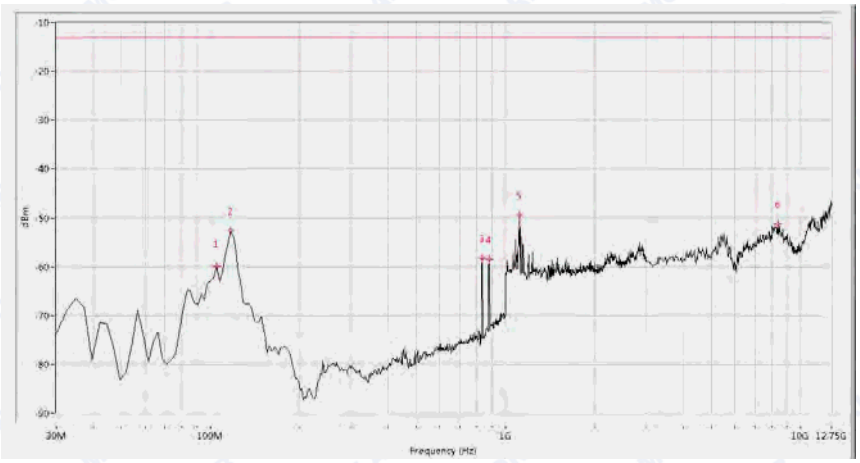

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-59.95	-13.0	46.9	203.0	Vertical	PASS
117.082	-52.62	-13.0	39.6	237.9	Vertical	PASS
833.092	-58.18	-13.0	45.2	65.0	Vertical	N.A
879.052	-58.44	-13.0	45.4	312.3	Vertical	N.A
1114.713	-49.50	-13.0	36.5	315.1	Vertical	PASS
8397.756	-51.24	-13.0	38.2	242.1	Vertical	PASS

(Plot K.4: HSPA+ 850MHz Channel = 4175, Test Antenna Vertical)

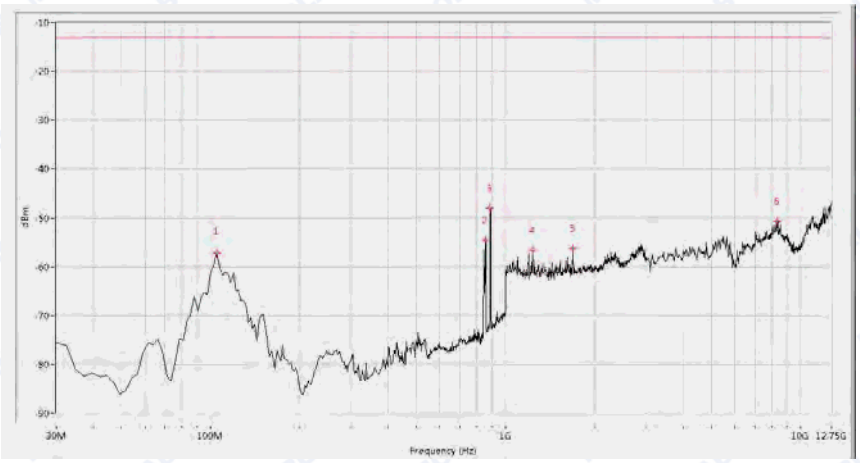

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-57.23	-13.0	44.2	73.3	Horizontal	PASS
854.863	-54.46	-13.0	41.5	52.3	Horizontal	N.A
888.728	-47.98	-13.0	35.0	23.3	Horizontal	N.A
1234.414	-56.57	-13.0	43.6	203.3	Horizontal	PASS
1688.279	-56.18	-13.0	43.2	20.8	Horizontal	PASS
8373.441	-50.78	-13.0	37.8	47.1	Horizontal	PASS

(Plot K.5: HSPA+ 850MHz Channel = 4233, Test Antenna Horizontal)

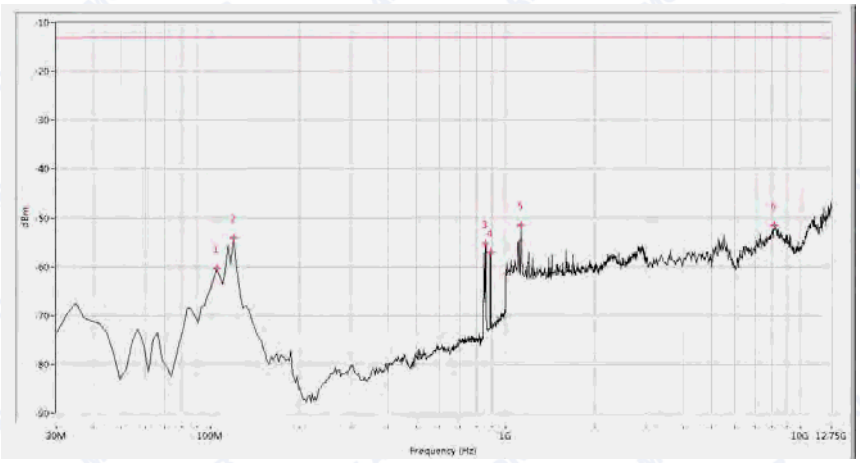

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-60.41	-13.0	47.4	216.6	Vertical	PASS
119.501	-54.06	-13.0	41.1	166.3	Vertical	PASS
854.863	-55.25	-13.0	42.3	94.9	Vertical	N.A
891.147	-57.02	-13.0	44.0	-0.0	Vertical	N.A
1129.676	-51.47	-13.0	38.5	204.2	Vertical	PASS
8130.299	-51.58	-13.0	38.6	3.8	Vertical	PASS

(Plot K.6: HSPA+ 850MHz Channel = 4233, Test Antenna Vertical)

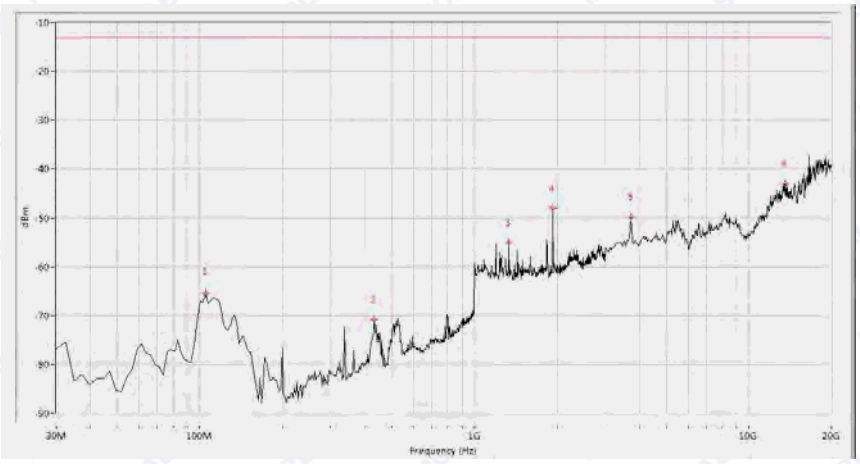

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-65.44	-13.0	52.4	279.5	Horizontal	PASS
431.546	-70.80	-13.0	57.8	9.3	Horizontal	PASS
1334.165	-54.99	-13.0	42.0	191.4	Horizontal	PASS
1932.668	-47.98	-13.0	35.0	345.5	Horizontal	N.A
3720.698	-49.68	-13.0	36.7	238.4	Horizontal	PASS
13513.716	-42.91	-13.0	29.9	42.4	Horizontal	PASS

(Plot L.1: HSPA+ 1900 MHz Channel = 9262, Test Antenna Horizontal)

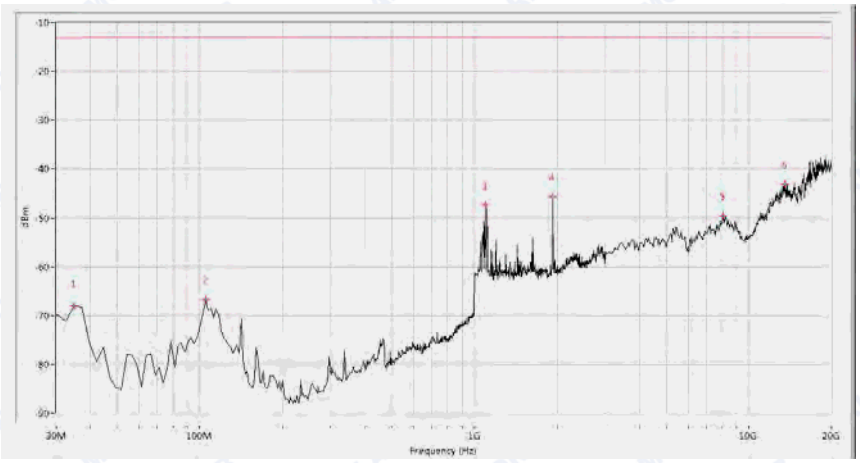

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-68.06	-13.0	55.1	258.8	Vertical	PASS
104.988	-66.77	-13.0	53.8	191.2	Vertical	PASS
1094.763	-47.33	-13.0	34.3	348.8	Vertical	PASS
1932.668	-45.69	-13.0	32.7	352.3	Vertical	N.A
8044.888	-49.54	-13.0	36.5	315.8	Vertical	PASS
13513.716	-43.07	-13.0	30.1	9.8	Vertical	PASS

(Plot L.2: HSPA+ 1900 MHz Channel = 9262, Test Antenna Vertical)

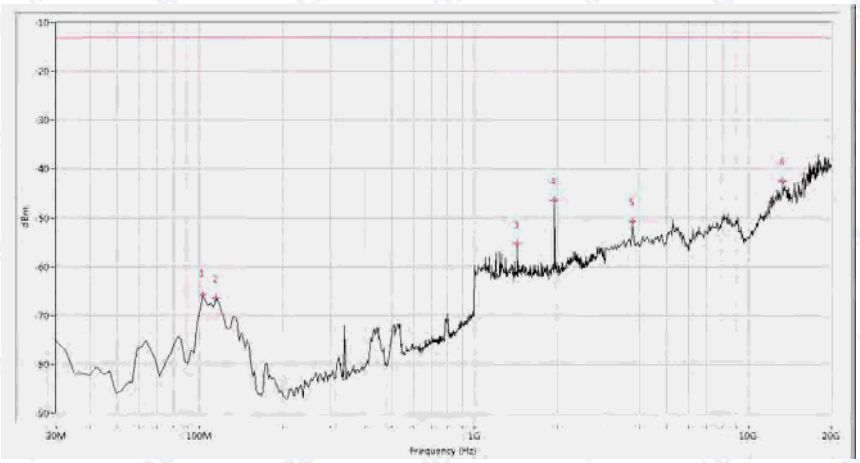

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
102.569	-65.72	-13.0	52.7	263.9	Horizontal	PASS
114.663	-66.43	-13.0	53.4	242.9	Horizontal	PASS
1433.915	-55.34	-13.0	42.3	267.6	Horizontal	PASS
1957.606	-46.38	-13.0	33.4	346.2	Horizontal	N.A
3763.092	-50.76	-13.0	37.8	53.7	Horizontal	PASS
13301.746	-42.53	-13.0	29.5	286.8	Horizontal	PASS

(Plot L.3: HSPA+ 1900 MHz Channel = 9400, Test Antenna Horizontal)

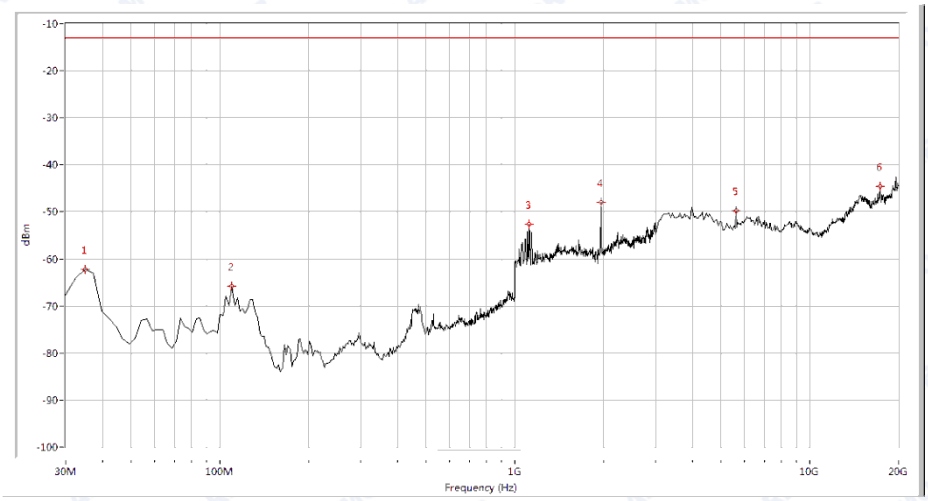

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-62.17	-13.0	49.2	24.2	Vertical	PASS
109.825	-65.76	-13.0	52.8	352.9	Vertical	PASS
1119.701	-52.53	-13.0	39.5	20.9	Vertical	PASS
1957.606	-47.94	-13.0	34.9	128.8	Vertical	PASS
5628.429	-49.83	-13.0	36.8	291.0	Vertical	PASS
17286.783	-44.54	-13.0	31.5	360.0	Vertical	PASS

(Plot L.4: HSPA+ 1900 MHz Channel = 9400, Test Antenna Vertical)

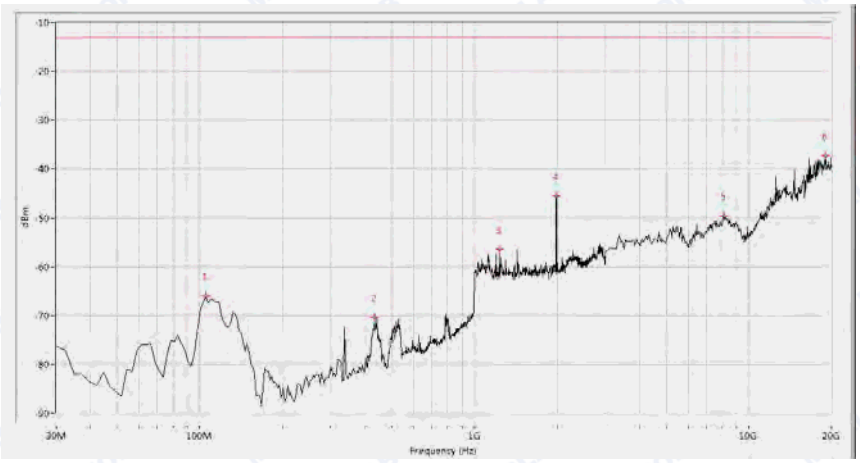

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
104.988	-65.94	-13.0	52.9	235.3	Horizontal	PASS
433.965	-70.31	-13.0	57.3	1.7	Horizontal	PASS
1234.414	-56.40	-13.0	43.4	81.2	Horizontal	PASS
1987.531	-45.49	-13.0	32.5	327.9	Horizontal	N.A
8087.282	-49.58	-13.0	36.6	204.4	Horizontal	PASS
19024.938	-37.28	-13.0	24.3	300.2	Horizontal	PASS

(Plot L.5: HSPA+ 1900 MHz Channel = 9538, Test Antenna Horizontal)

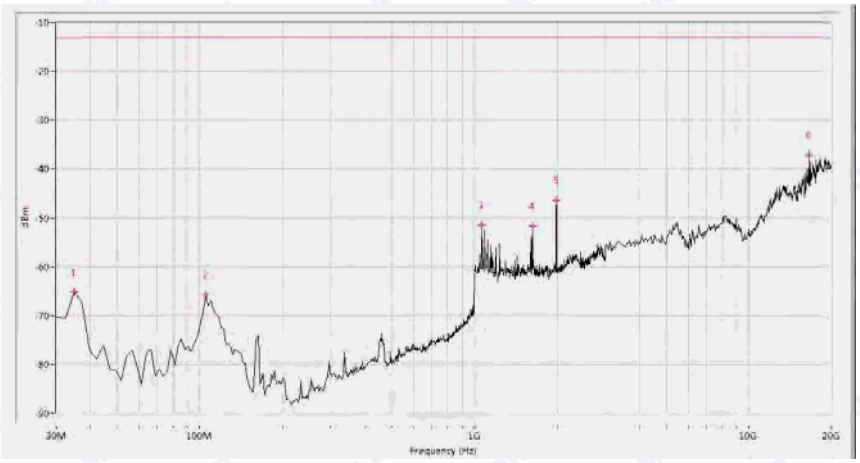

Fre. (MHz)	Peak	Limit(PK)	Margin	Degree	Antenna	Verdict
34.838	-65.06	-13.0	52.1	-0.0	Vertical	PASS
104.988	-65.77	-13.0	52.8	184.4	Vertical	PASS
1064.838	-51.48	-13.0	38.5	239.1	Vertical	PASS
1628.429	-51.66	-13.0	38.7	59.2	Vertical	PASS
1987.531	-46.40	-13.0	33.4	147.1	Vertical	N.A
16523.691	-37.15	-13.0	24.1	355.8	Vertical	PASS

(Plot L.6: HSPA+ 1900 MHz Channel = 9538, Test Antenna Vertical)

** END OF REPORT **