

## Appendix A: Test Results of Bluetooth Low Energy


|                                                                                                       |           |
|-------------------------------------------------------------------------------------------------------|-----------|
| <b>APPENDIX A: TEST RESULTS OF BLUETOOTH LOW ENERGY .....</b>                                         | <b>1</b>  |
| <b>APPENDIX A.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY .....</b>                           | <b>2</b>  |
| <b>APPENDIX A.2: TEST RESULTS OF 6dB BANDWIDTH .....</b>                                              | <b>5</b>  |
| <b>APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH .....</b>                                              | <b>8</b>  |
| <b>APPENDIX A.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH .....</b> | <b>11</b> |
| <i>Band Edge .....</i>                                                                                | <i>11</i> |
| <i>Conducted Spurious Emission .....</i>                                                              | <i>14</i> |
| <b>APPENDIX A.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS .....</b>                                | <b>21</b> |
| <i>30 MHz - 1GHz .....</i>                                                                            | <i>21</i> |
| <i>1GHz - 18GHz .....</i>                                                                             | <i>23</i> |
| <i>Co-location .....</i>                                                                              | <i>35</i> |
| <b>APPENDIX A.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS .....</b>                     | <b>39</b> |

## Appendix A.1: Test Results of Conducted Power Spectral Density


| TestMode | Antenna | Channel | Result[dBm/3-100kHz] | Limit[dBm/3kHz] | Verdict |
|----------|---------|---------|----------------------|-----------------|---------|
| BLE_1M   | Ant1    | 2402    | -7.66                | ≤8.00           | PASS    |
|          |         | 2440    | -8.38                | ≤8.00           | PASS    |
|          |         | 2480    | -9.77                | ≤8.00           | PASS    |
| BLE_2M   | Ant1    | 2402    | -7.86                | ≤8.00           | PASS    |
|          |         | 2440    | -8.60                | ≤8.00           | PASS    |
|          |         | 2480    | -9.74                | ≤8.00           | PASS    |




BLE 2M Ant1 2402

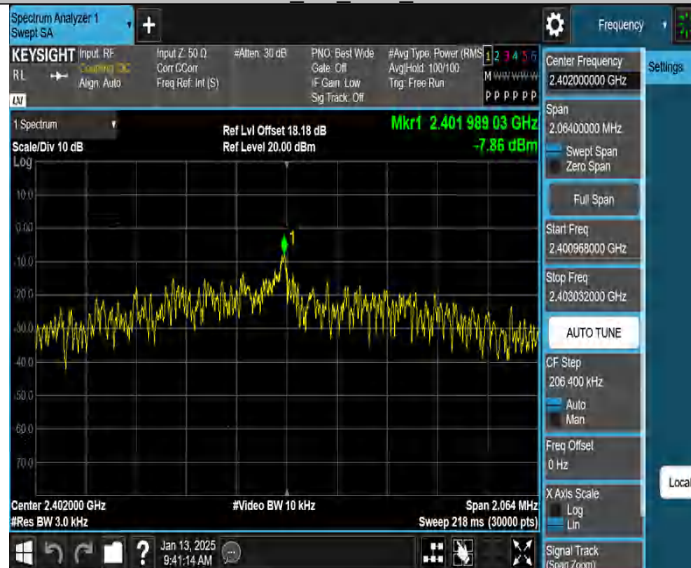

BLE 2M Ant1 2440

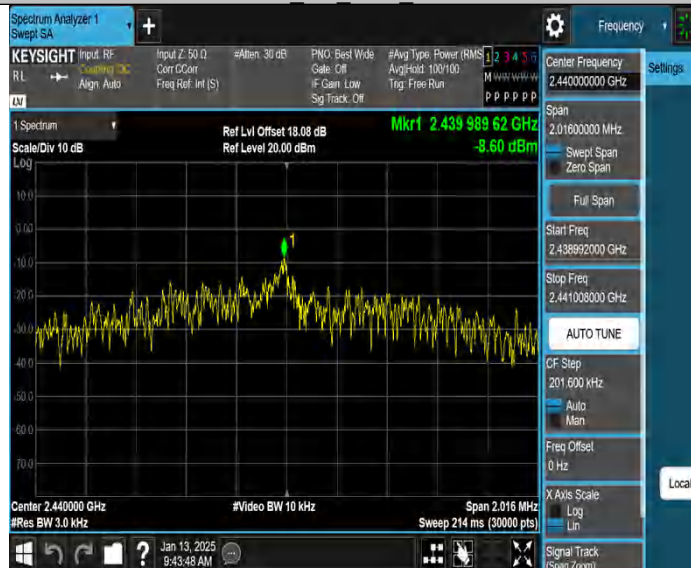

BLE 2M Ant1 2480

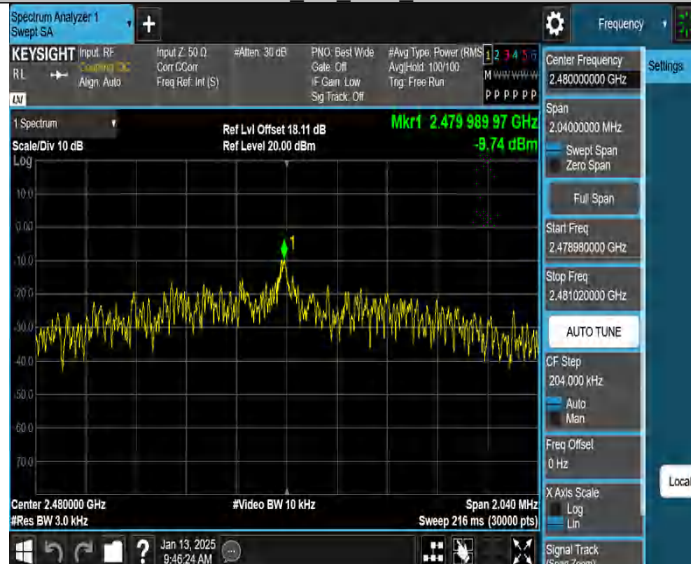

## Appendix A.2: Test Results of 6dB Bandwidth

| TestMode | Antenna | Channel | DTS BW [MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|----------|---------|---------|--------------|----------|----------|------------|---------|
| BLE_1M   | Ant1    | 2402    | 0.668        | 2401.668 | 2402.336 | 0.5        | PASS    |
|          |         | 2440    | 0.660        | 2439.672 | 2440.332 | 0.5        | PASS    |
|          |         | 2480    | 0.672        | 2479.660 | 2480.332 | 0.5        | PASS    |
| BLE_2M   | Ant1    | 2402    | 1.032        | 2401.472 | 2402.504 | 0.5        | PASS    |
|          |         | 2440    | 1.008        | 2439.476 | 2440.484 | 0.5        | PASS    |
|          |         | 2480    | 1.020        | 2479.468 | 2480.488 | 0.5        | PASS    |

BLE 1M Ant1 2402



BLE 1M Ant1 2440



BLE 1M Ant1 2480



BLE 2M Ant1 2402



BLE 2M Ant1 2440




BLE 2M Ant1 2480



### Appendix A.3: Test Results of 99% Bandwidth

| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz]   | FH[MHz]   | Limit[MHz] | Verdict |
|----------|---------|---------|-----------|-----------|-----------|------------|---------|
| BLE_1M   | Ant1    | 2402    | 1.0793    | 2401.4461 | 2402.5254 | ---        | PASS    |
|          |         | 2440    | 1.2122    | 2439.3117 | 2440.5239 | ---        | PASS    |
|          |         | 2480    | 1.1945    | 2479.3399 | 2480.5344 | ---        | PASS    |
| BLE_2M   | Ant1    | 2402    | 2.0864    | 2400.9673 | 2403.0537 | ---        | PASS    |
|          |         | 2440    | 2.1017    | 2438.9518 | 2441.0535 | ---        | PASS    |
|          |         | 2480    | 2.0764    | 2478.9725 | 2481.0489 | ---        | PASS    |

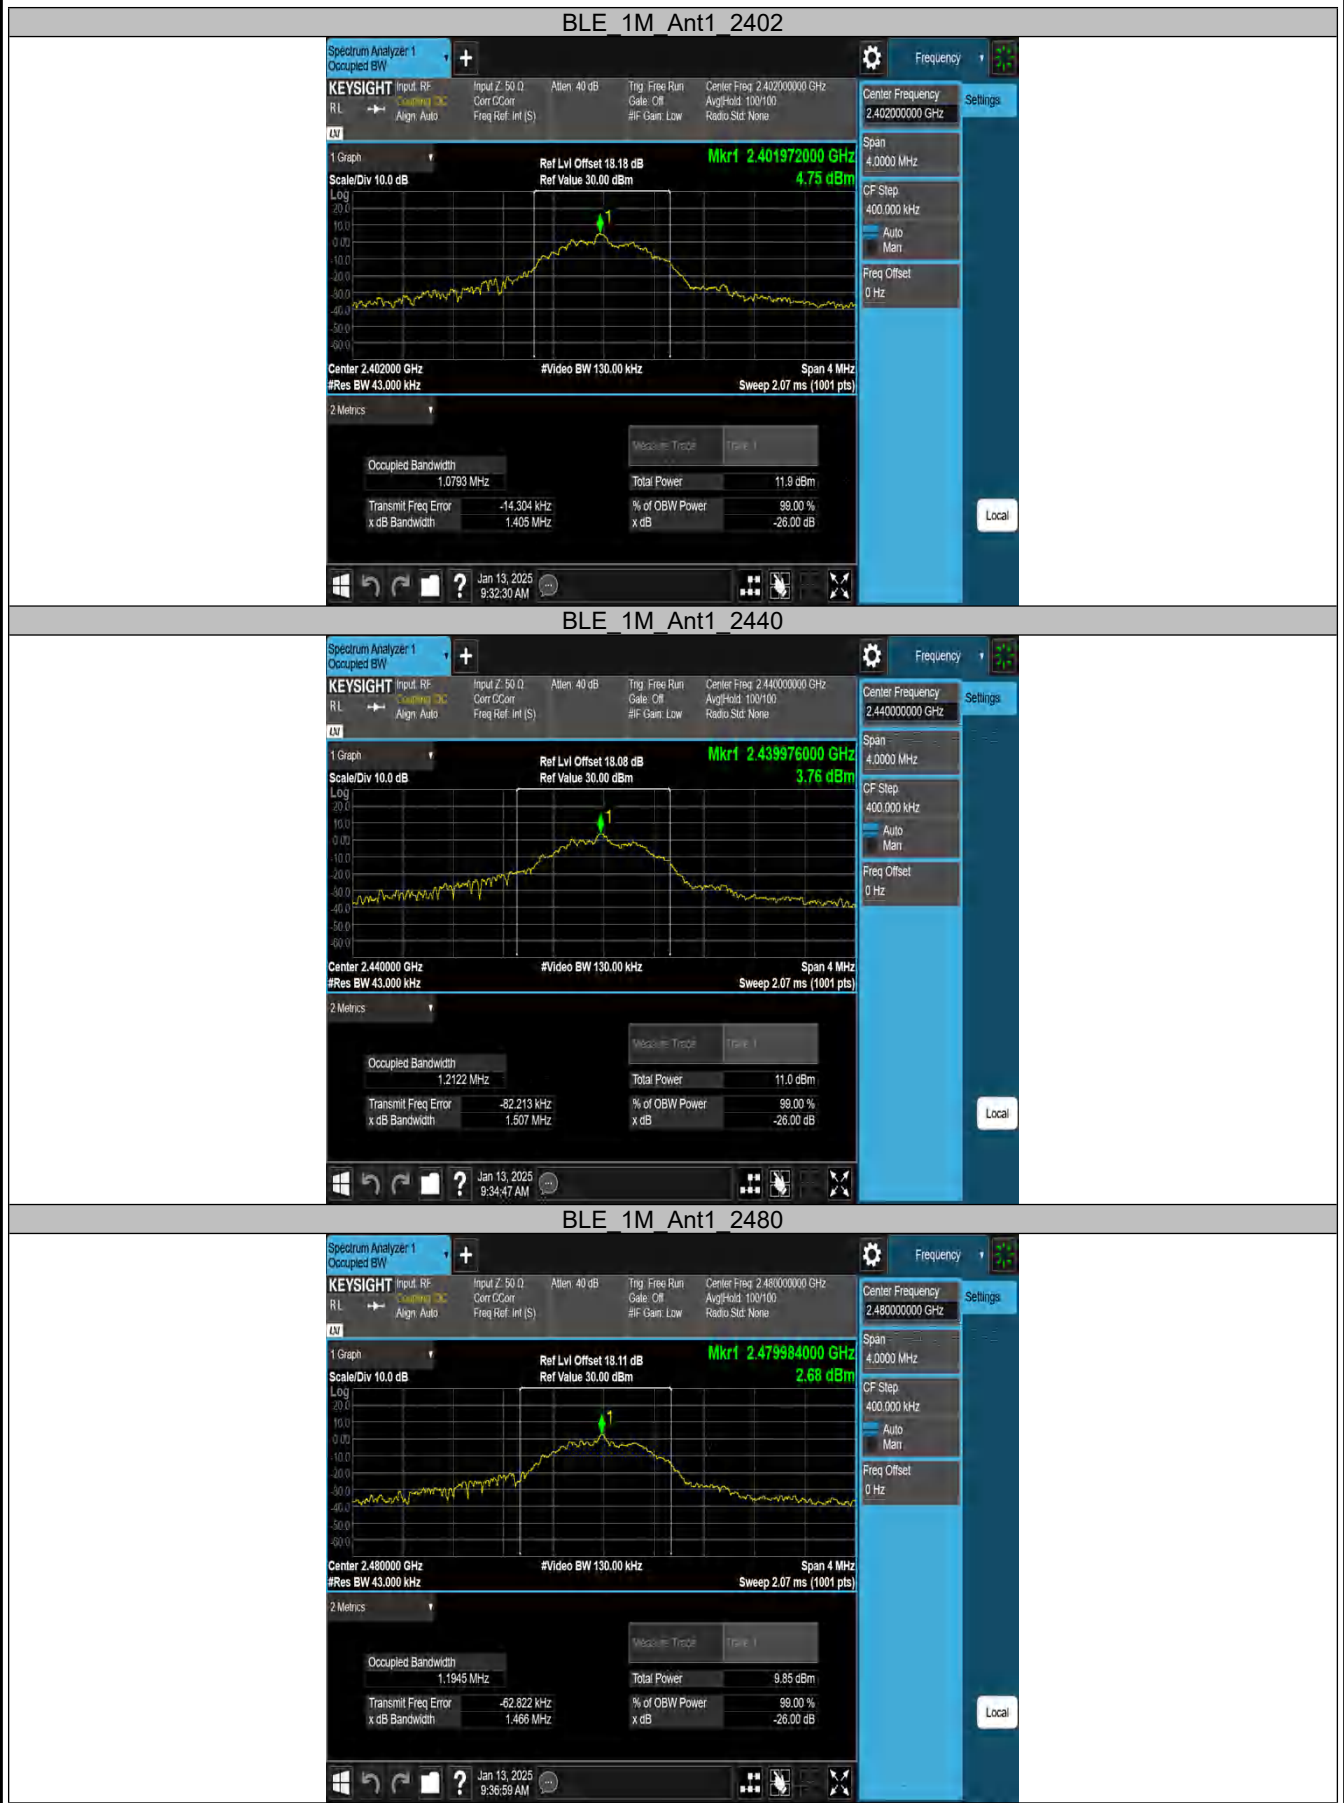

BLE 2M Ant1 2402



BLE 2M Ant1 2440



BLE 2M Ant1 2480



## Appendix A.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge

| TestMode | Antenna | ChName | Channel | RefLevel[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|----------|---------|--------|---------|---------------|-------------|------------|---------|
| BLE_1M   | Ant1    | Low    | 2402    | 4.19          | -31.03      | ≤-15.81    | PASS    |
|          |         | High   | 2480    | 2.42          | -42.04      | ≤-17.58    | PASS    |
| BLE_2M   | Ant1    | Low    | 2402    | 4.22          | -31.69      | ≤-15.78    | PASS    |
|          |         | High   | 2480    | 2.41          | -44.22      | ≤-17.59    | PASS    |

BLE 1M Ant1 Low 2402



BLE 1M Ant1 High 2480



BLE 2M Ant1 Low 2402






## Conducted Spurious Emission

| TestMode | Antenna | Channel | FreqRange [MHz] | RefLevel [dBm] | Result[dBm] | Limit[dBm] | Verdict |
|----------|---------|---------|-----------------|----------------|-------------|------------|---------|
| BLE_1M   | Ant1    | 2402    | Reference       | 4.09           | 4.09        | ---        | PASS    |
|          |         |         | 30~1000         | 4.09           | -42.28      | ≤-15.91    | PASS    |
|          |         |         | 1000~26500      | 4.09           | -33.12      | ≤-15.91    | PASS    |
|          |         | 2440    | Reference       | 3.45           | 3.45        | ---        | PASS    |
|          |         |         | 30~1000         | 3.45           | -41.95      | ≤-16.55    | PASS    |
|          |         |         | 1000~26500      | 3.45           | -33.33      | ≤-16.55    | PASS    |
|          |         | 2480    | Reference       | 2.34           | 2.34        | ---        | PASS    |
|          |         |         | 30~1000         | 2.34           | -41.73      | ≤-17.66    | PASS    |
|          |         |         | 1000~26500      | 2.34           | -31.63      | ≤-17.66    | PASS    |
| BLE_2M   | Ant1    | 2402    | Reference       | 4.14           | 4.14        | ---        | PASS    |
|          |         |         | 30~1000         | 4.14           | -41.57      | ≤-15.86    | PASS    |
|          |         |         | 1000~26500      | 4.14           | -32.41      | ≤-15.86    | PASS    |
|          |         | 2440    | Reference       | 3.44           | 3.44        | ---        | PASS    |
|          |         |         | 30~1000         | 3.44           | -41.95      | ≤-16.56    | PASS    |
|          |         |         | 1000~26500      | 3.44           | -33.35      | ≤-16.56    | PASS    |
|          |         | 2480    | Reference       | 2.37           | 2.37        | ---        | PASS    |
|          |         |         | 30~1000         | 2.37           | -41.7       | ≤-17.63    | PASS    |
|          |         |         | 1000~26500      | 2.37           | -32.05      | ≤-17.63    | PASS    |

BLE 1M Ant1 2402 0~Reference



BLE 1M Ant1 2402 30~1000

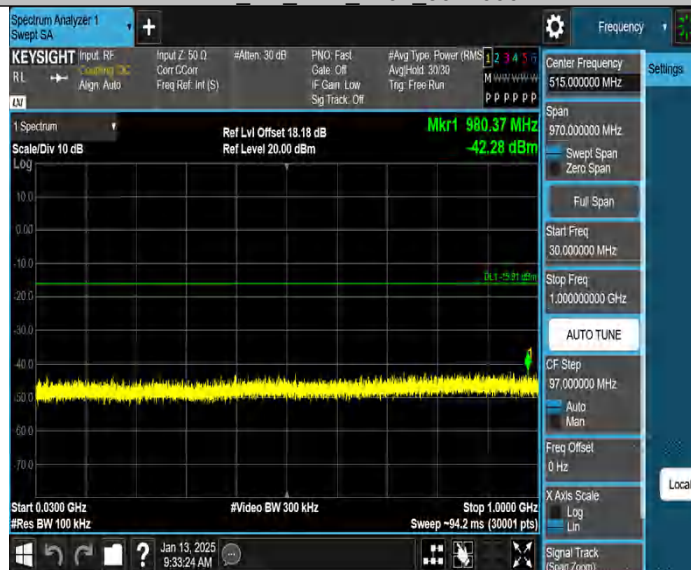

BLE 1M Ant1 2402 1000~26500



BLE 1M Ant1 2440 0~Reference



BLE 1M Ant1 2440 30~1000




BLE 1M Ant1 2440 1000~26500



BLE\_1M\_Ant1\_2480\_0~Reference





BLE\_1M\_Ant1\_2480\_30~1000

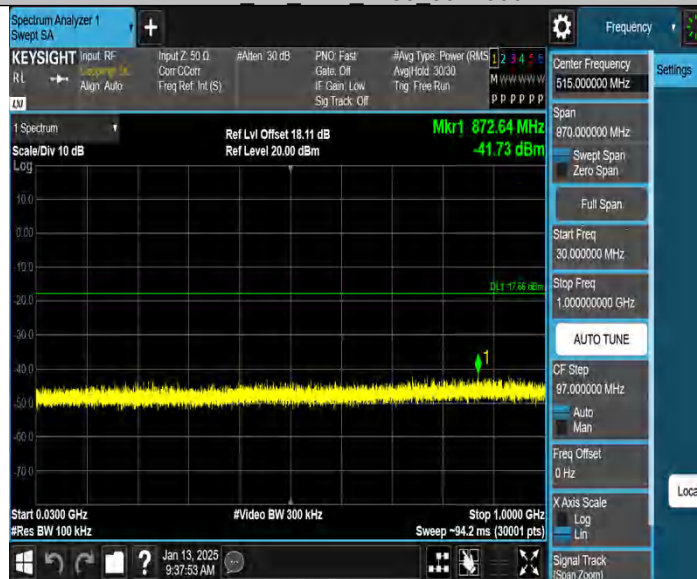

BLE\_1M\_Ant1\_2480\_1000~26500





| Mode | Trace | Scale | X            | Y          | Function | Function Width | Function Value |
|------|-------|-------|--------------|------------|----------|----------------|----------------|
| 1 N  | 1     | f     | 2.40165 GHz  | 2.247 dBm  |          |                |                |
| 2 N  | 1     | f     | 26.06650 GHz | -32.41 dBm |          |                |                |
| 3    |       |       |              |            |          |                |                |
| 4    |       |       |              |            |          |                |                |
| 5    |       |       |              |            |          |                |                |
| 6    |       |       |              |            |          |                |                |

BLE 2M Ant1 2440 0~Reference



BLE 2M Ant1 2440 30~1000




BLE 2M Ant1 2440 1000~26500



BLE 2M Ant1 2480 0~Reference



BLE 2M Ant1 2480 30~1000

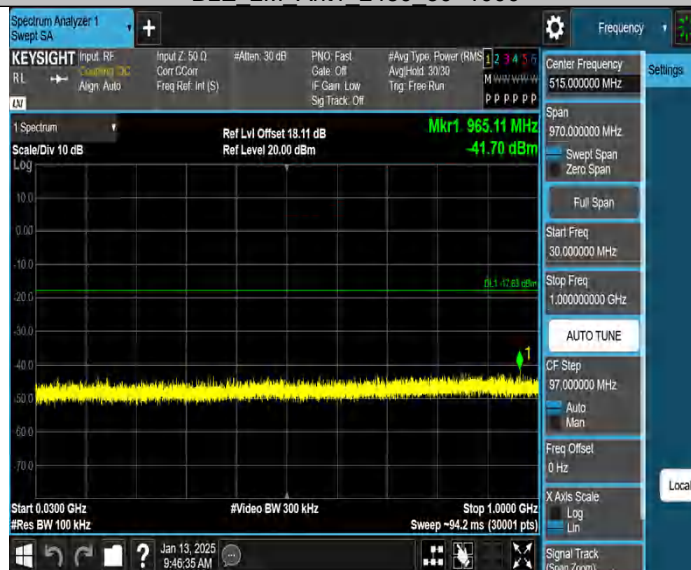

BLE 2M Ant1 2480 1000~26500



## Appendix A.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

### EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Matrice 4TD          |
| Model:              | M4TD                     |
| Test Mode:          | BLE 1M_Mid channel       |
| Order No/Sample No: | 168512858/A003882058-021 |
| Test Voltage:       | Battery                  |
| Remark:             | Temp 23 Humi:53%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

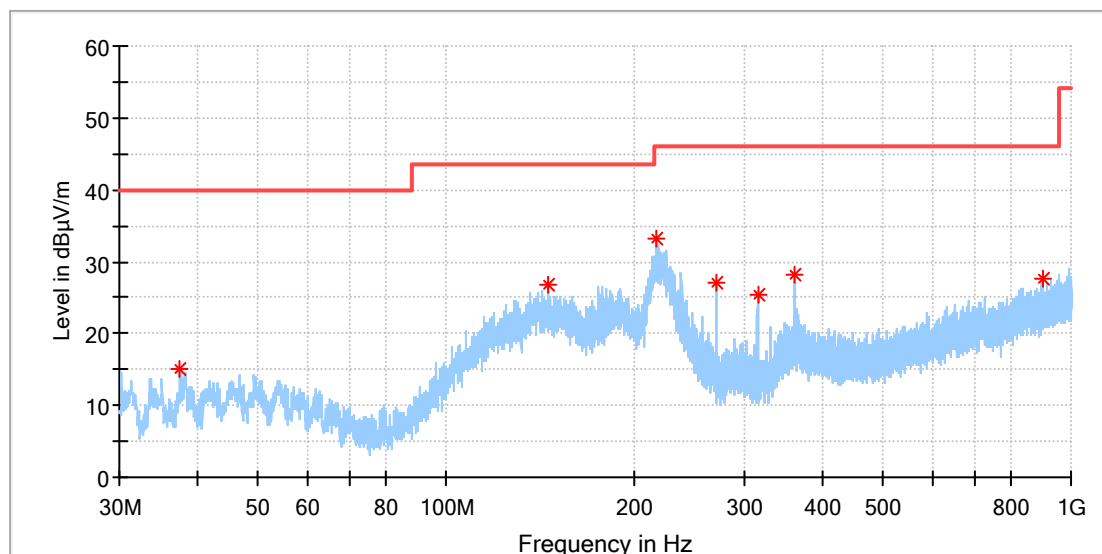

### Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 37.573462       | 14.94            | 40.00          | 25.06       | 100.0       | H   | 123.0         | -21.0        |
| 145.168846      | 26.75            | 43.50          | 16.75       | 100.0       | H   | 83.0          | -22.4        |
| 217.210000      | 33.11            | 46.00          | 12.89       | 100.0       | H   | 48.0          | -18.7        |
| 270.000385      | 26.94            | 46.00          | 19.06       | 100.0       | H   | 294.0         | -17.0        |
| 315.030769      | 25.38            | 46.00          | 20.62       | 100.0       | H   | 302.0         | -15.9        |
| 360.023846      | 28.24            | 46.00          | 17.76       | 100.0       | H   | 243.0         | -14.6        |
| 900.575000      | 27.65            | 46.00          | 18.35       | 100.0       | H   | 6.0           | -4.8         |

### Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_Mid channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

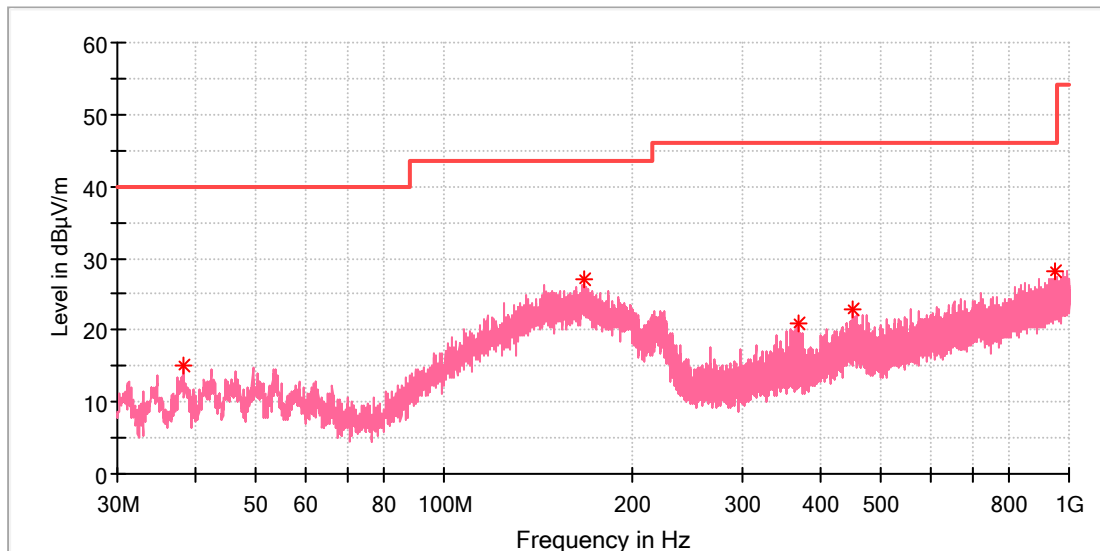

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 38.319615       | 15.10            | 40.00          | 24.90       | 100.0       | V   | 196.0         | -20.7        |
| 167.329615      | 27.03            | 43.50          | 16.47       | 100.0       | V   | 204.0         | -21.5        |
| 368.753846      | 20.85            | 46.00          | 25.15       | 100.0       | V   | 353.0         | -14.5        |
| 449.935385      | 22.94            | 46.00          | 23.06       | 100.0       | V   | 338.0         | -12.8        |
| 947.433462      | 28.18            | 46.00          | 17.82       | 100.0       | V   | 54.0          | -4.3         |

## Final\_Result


| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Matrice 4TD          |
| Model:              | M4TD                     |
| Test Mode:          | BLE 1M_Low channel       |
| Order No/Sample No: | 168512858/A003882058-021 |
| Test Voltage:       | Battery                  |
| Remark:             | Temp 23 Humi:53%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

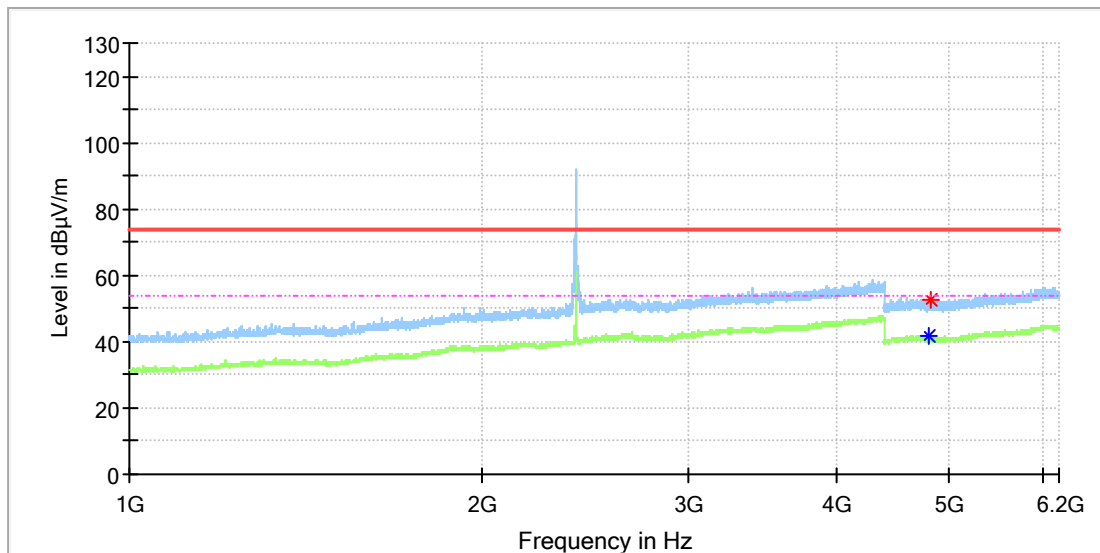

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4809.500000     | ---              | 41.59            | 54.00          | 12.41       | 150.0       | H   | 346.0         | 13.3         |
| 4821.500000     | 52.81            | ---              | 74.00          | 21.19       | 150.0       | H   | 314.0         | 13.3         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_Low channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

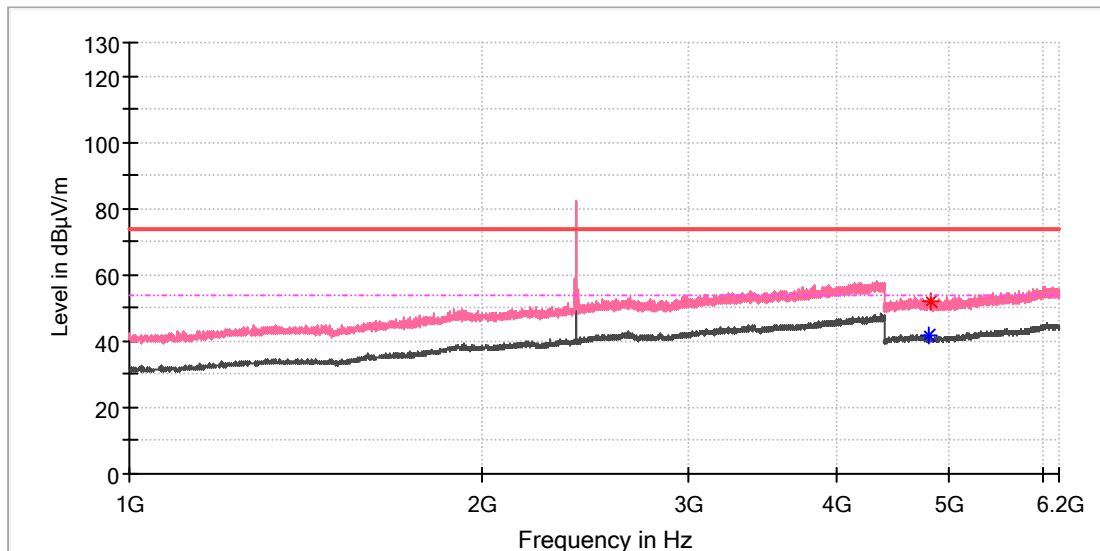

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4809.500000     | ---              | 41.50            | 54.00          | 12.50       | 150.0       | V   | 39.0          | 13.3         |
| 4821.500000     | 51.71            | ---              | 74.00          | 22.29       | 150.0       | V   | 302.0         | 13.3         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_Low channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

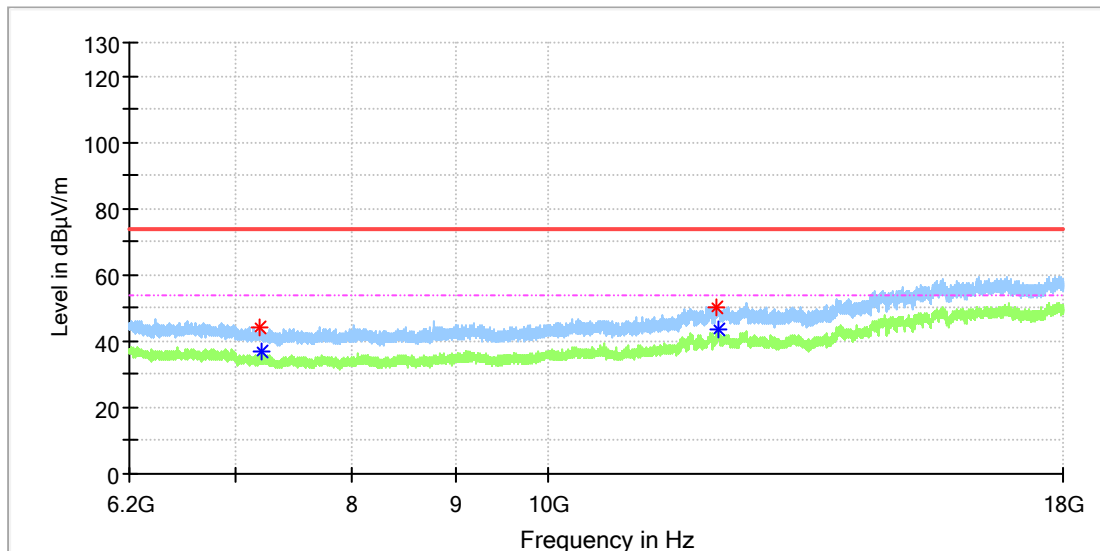

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7190.216667     | 44.00            | ---              | 74.00          | 30.00       | 150.0       | H   | 107.0         | 8.8          |
| 7205.458333     | ---              | 36.73            | 54.00          | 17.27       | 150.0       | H   | 237.0         | 8.8          |
| 12116.716667    | 50.39            | ---              | 74.00          | 23.61       | 150.0       | H   | 129.0         | 15.9         |
| 12145.233333    | ---              | 43.56            | 54.00          | 10.44       | 150.0       | H   | 84.0          | 16.6         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_Low channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

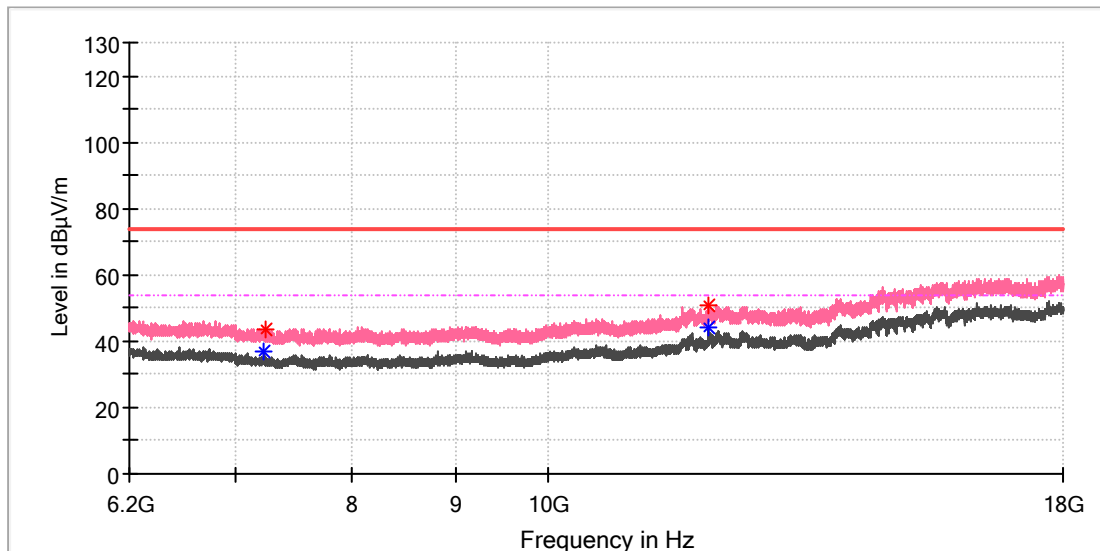

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7234.958333     | ---              | 36.62            | 54.00          | 17.38       | 150.0       | V   | 188.0         | 8.6          |
| 7235.450000     | 43.66            | ---              | 74.00          | 30.34       | 150.0       | V   | 354.0         | 8.6          |
| 12011.008333    | ---              | 44.42            | 54.00          | 9.58        | 150.0       | V   | 56.0          | 15.5         |
| 12015.925000    | 50.97            | ---              | 74.00          | 23.03       | 150.0       | V   | 310.0         | 15.6         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_Mid channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

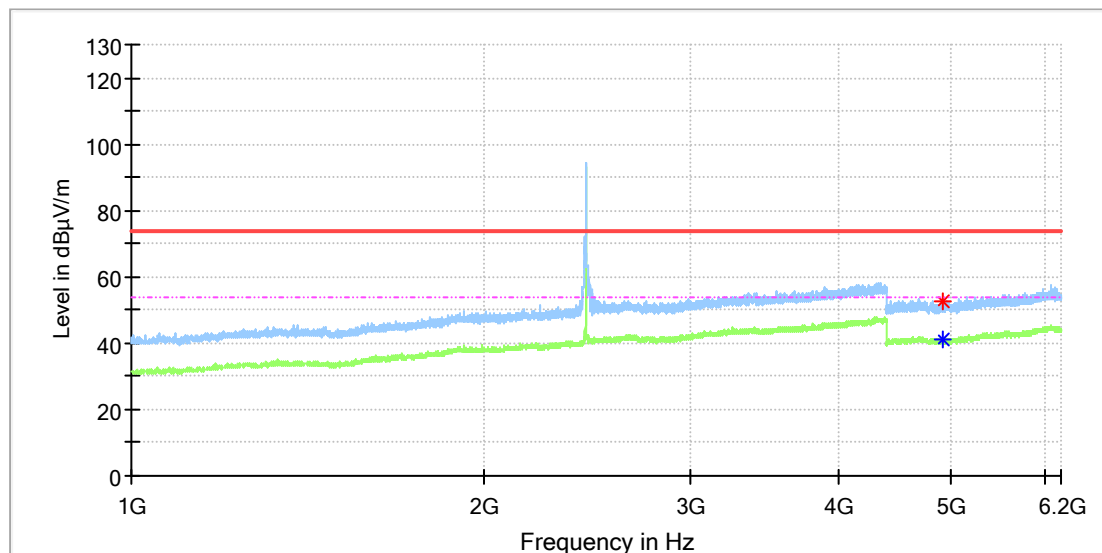

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4907.500000     | ---              | 41.17            | 54.00          | 12.83       | 150.0       | H   | 359.0         | 13.3         |
| 4910.000000     | 52.46            | ---              | 74.00          | 21.54       | 150.0       | H   | 278.0         | 13.3         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_Mid channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

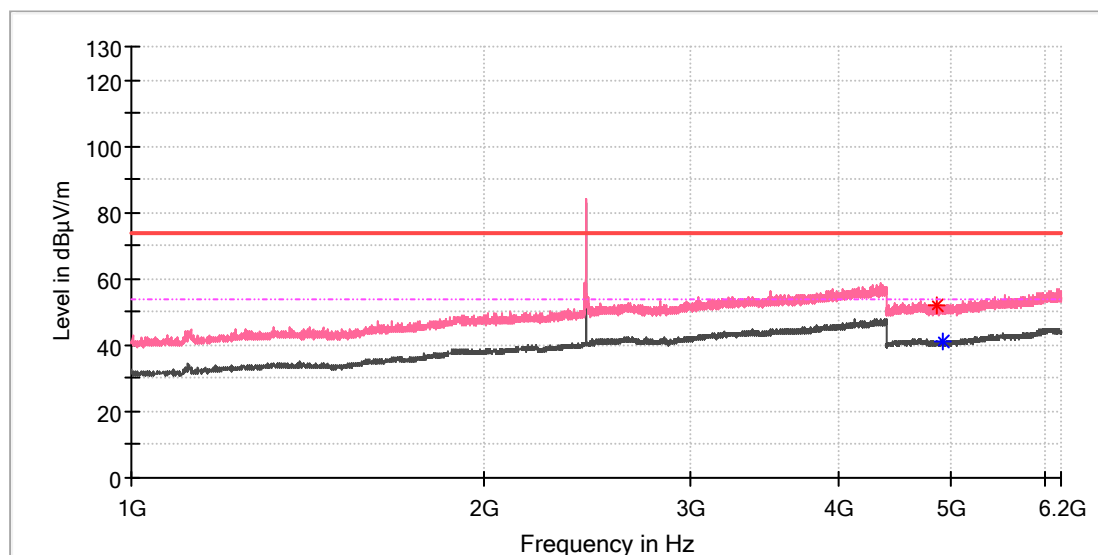

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4862.000000     | 52.03            | ---              | 74.00          | 21.97       | 150.0       | V   | 317.0         | 13.3         |
| 4908.500000     | ---              | 41.07            | 54.00          | 12.93       | 150.0       | V   | 266.0         | 13.3         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_Mid channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

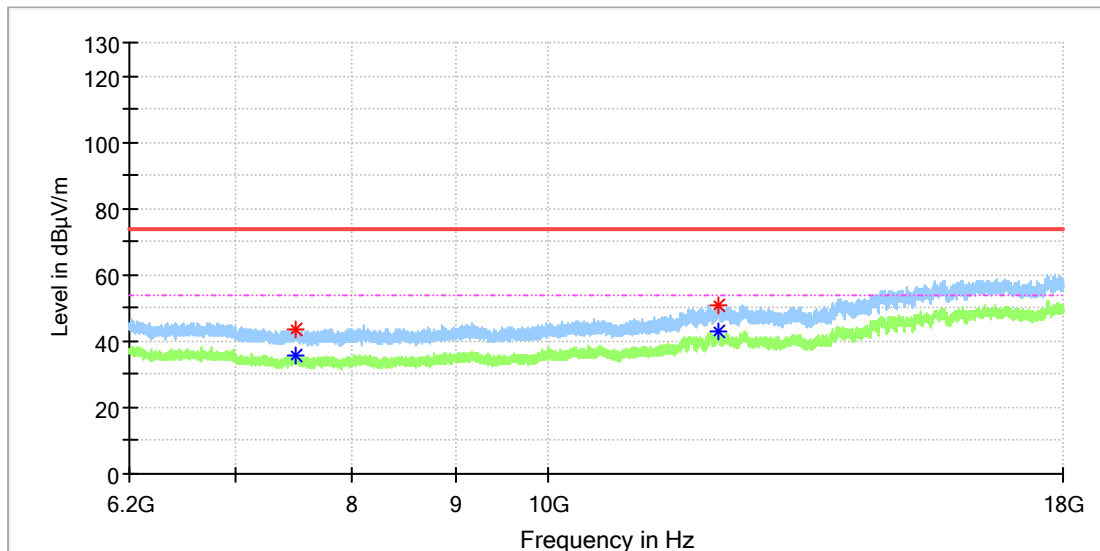

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7496.033333     | ---              | 35.61            | 54.00          | 18.39       | 150.0       | H   | 235.0         | 8.7          |
| 7503.900000     | 43.83            | ---              | 74.00          | 30.17       | 150.0       | H   | 96.0          | 8.7          |
| 12151.133333    | 50.54            | ---              | 74.00          | 23.46       | 150.0       | H   | 28.0          | 16.7         |
| 12158.016667    | ---              | 42.71            | 54.00          | 11.29       | 150.0       | H   | 113.0         | 16.3         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_Mid channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

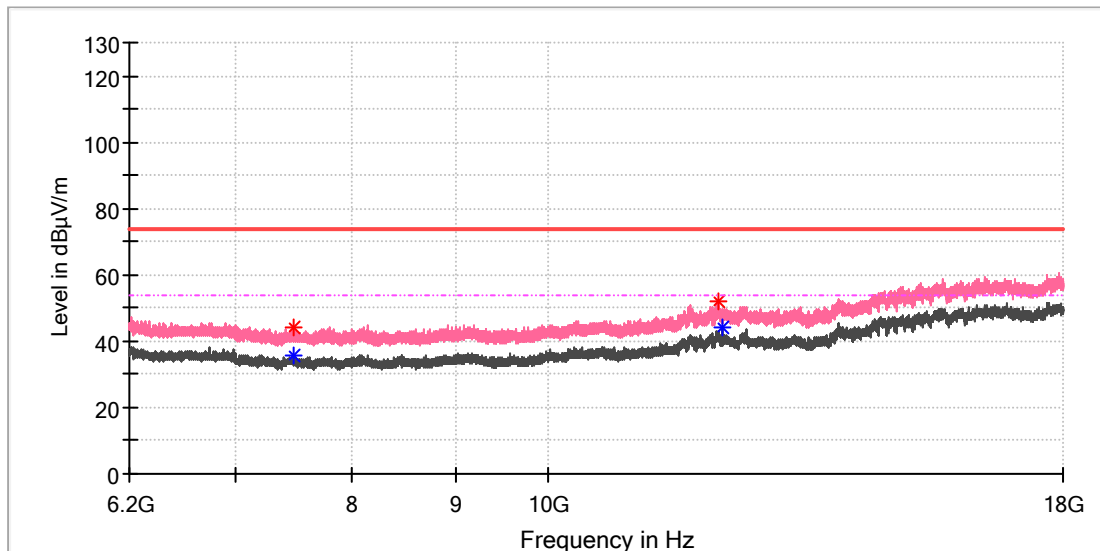

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7474.891667     | ---              | 35.51            | 54.00          | 18.49       | 150.0       | V   | 271.0         | 8.6          |
| 7485.216667     | 43.87            | ---              | 74.00          | 30.13       | 150.0       | V   | 348.0         | 8.7          |
| 12148.675000    | 52.04            | ---              | 74.00          | 21.96       | 150.0       | V   | 326.0         | 16.7         |
| 12200.300000    | ---              | 44.04            | 54.00          | 9.96        | 150.0       | V   | 326.0         | 15.7         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_High channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

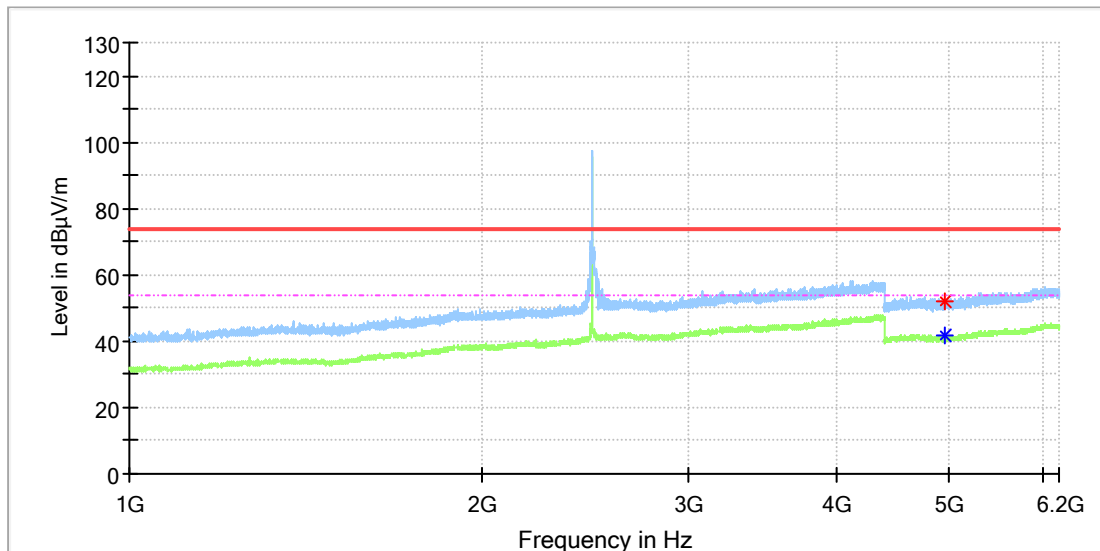

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4957.500000     | ---              | 41.43            | 54.00          | 12.57       | 150.0       | H   | 118.0         | 13.3         |
| 4960.000000     | 52.12            | ---              | 74.00          | 21.88       | 150.0       | H   | 123.0         | 13.3         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_High channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

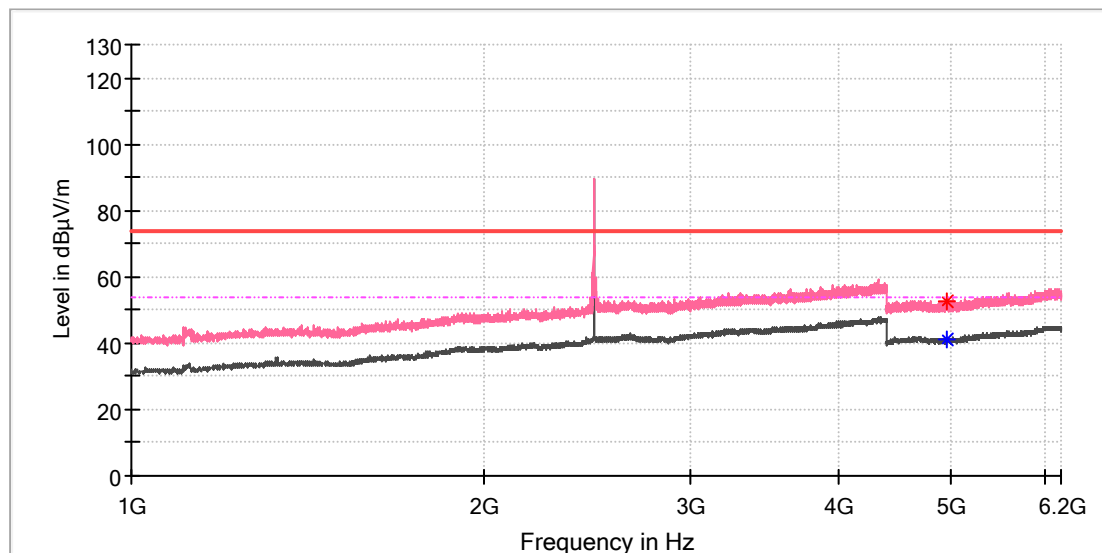

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4952.500000     | ---              | 41.30            | 54.00          | 12.70       | 150.0       | V   | 138.0         | 13.3         |
| 4958.000000     | 52.56            | ---              | 74.00          | 21.44       | 150.0       | V   | 15.0          | 13.3         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_High channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

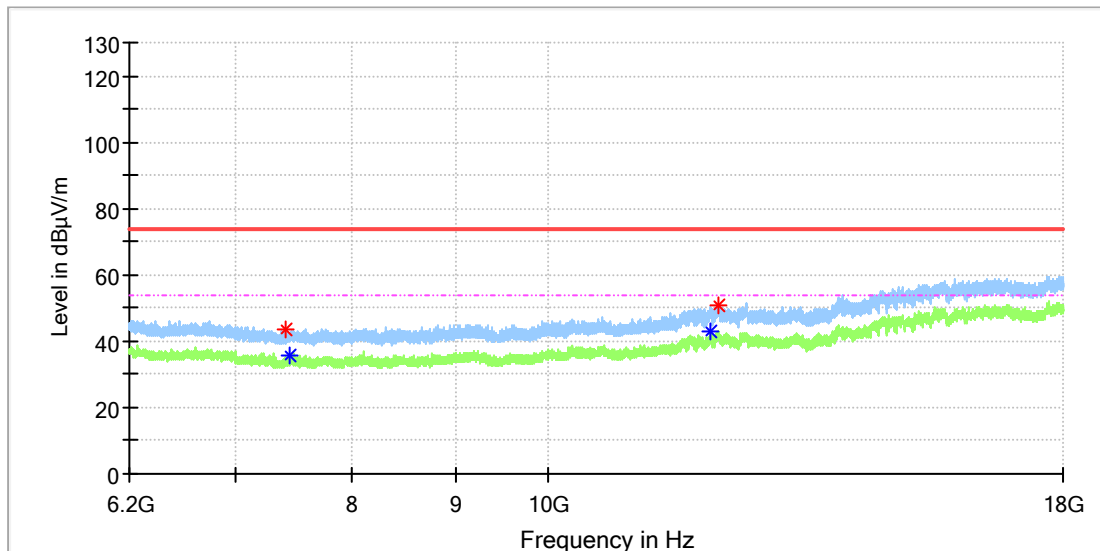

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7414.908333     | 43.39            | ---              | 74.00          | 30.61       | 150.0       | H   | 106.0         | 8.3          |
| 7439.983333     | ---              | 35.75            | 54.00          | 18.25       | 150.0       | H   | 96.0          | 8.4          |
| 12047.391667    | ---              | 42.83            | 54.00          | 11.17       | 150.0       | H   | 161.0         | 16.4         |
| 12146.708333    | 50.52            | ---              | 74.00          | 23.48       | 150.0       | H   | 233.0         | 16.6         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_High channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

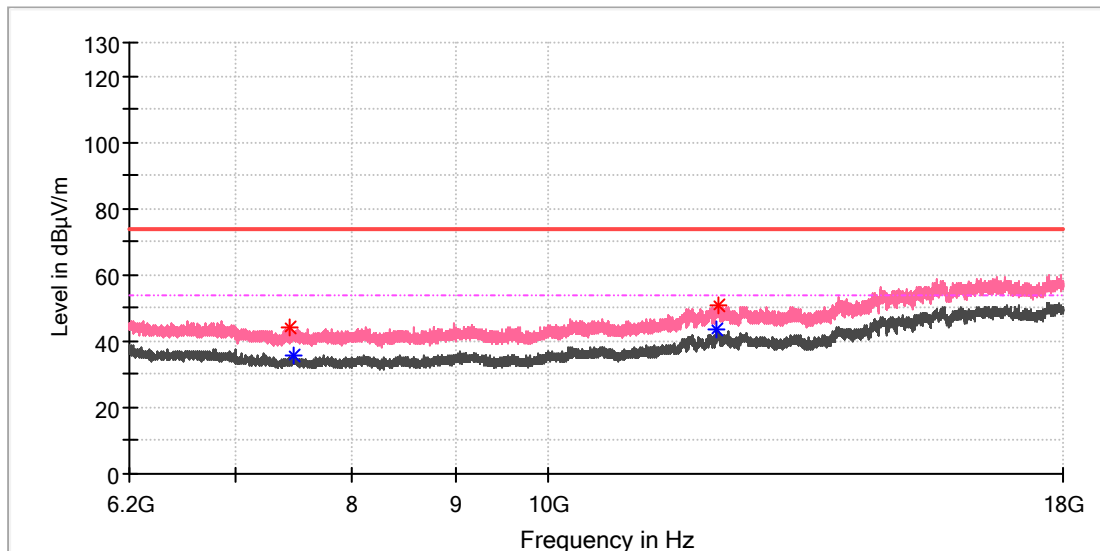

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7437.525000     | 44.41            | ---              | 74.00          | 29.59       | 150.0       | V   | 328.0         | 8.4          |
| 7485.708333     | ---              | 35.82            | 54.00          | 18.18       | 150.0       | V   | 206.0         | 8.7          |
| 12130.975000    | ---              | 43.59            | 54.00          | 10.41       | 150.0       | V   | 0.0           | 16.2         |
| 12152.608333    | 50.83            | ---              | 74.00          | 23.17       | 150.0       | V   | 172.0         | 16.6         |

## Final\_Result


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

Co-location

Note: The highest waveform in the figure is Bluetooth /2437M / 5GHz SDR Fundamental.

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Matrice 4TD          |
| Model:              | M4TD                     |
| Test Mode:          | SDR 5G+BLE+WIFI 2437MHz  |
| Order No/Sample No: | 168512858/A003882058-003 |
| Test Voltage:       | Battery                  |
| Remark:             | Temp 23 Humi:53%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

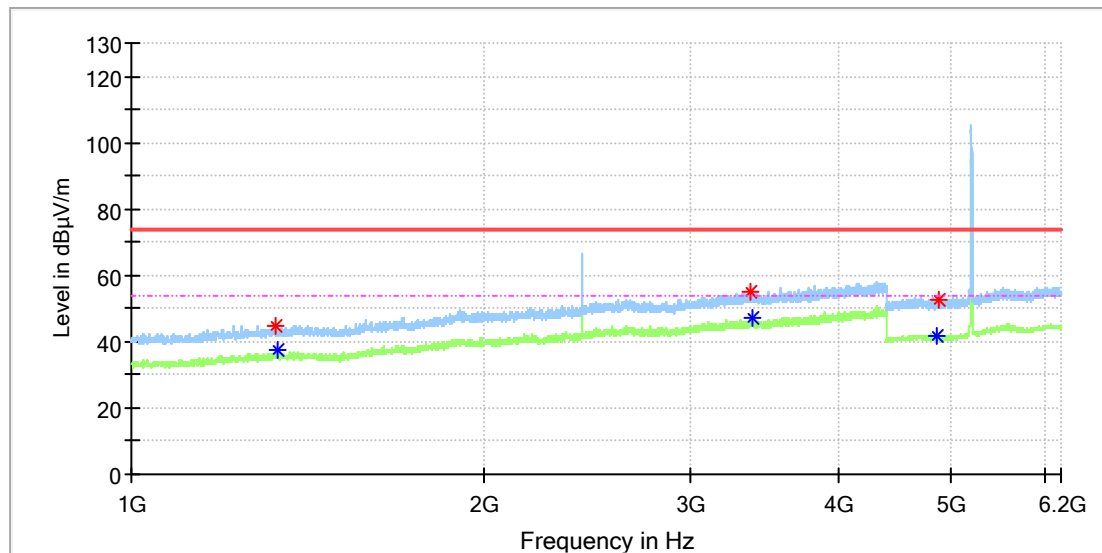

## Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 1326.000000     | 44.65            | ---              | 74.00          | 29.35       | 150.0       | H   | 317.0         | 2.9          |
| 1331.500000     | ---              | 37.24            | 54.00          | 16.76       | 150.0       | H   | 310.0         | 3.0          |
| 3365.500000     | 54.82            | ---              | 74.00          | 19.18       | 150.0       | H   | 202.0         | 11.0         |
| 3383.000000     | ---              | 46.92            | 54.00          | 7.08        | 150.0       | H   | 337.0         | 11.1         |
| 4861.000000     | ---              | 41.46            | 54.00          | 12.54       | 150.0       | H   | 128.0         | 13.3         |
| 4869.500000     | 52.87            | ---              | 74.00          | 21.13       | 150.0       | H   | 110.0         | 13.3         |

## Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         | --- | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: SDR 5G+BLE+WIFI 2437MHz  
Order No/Sample No: 168512858/A003882058-003  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC Part 15C  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

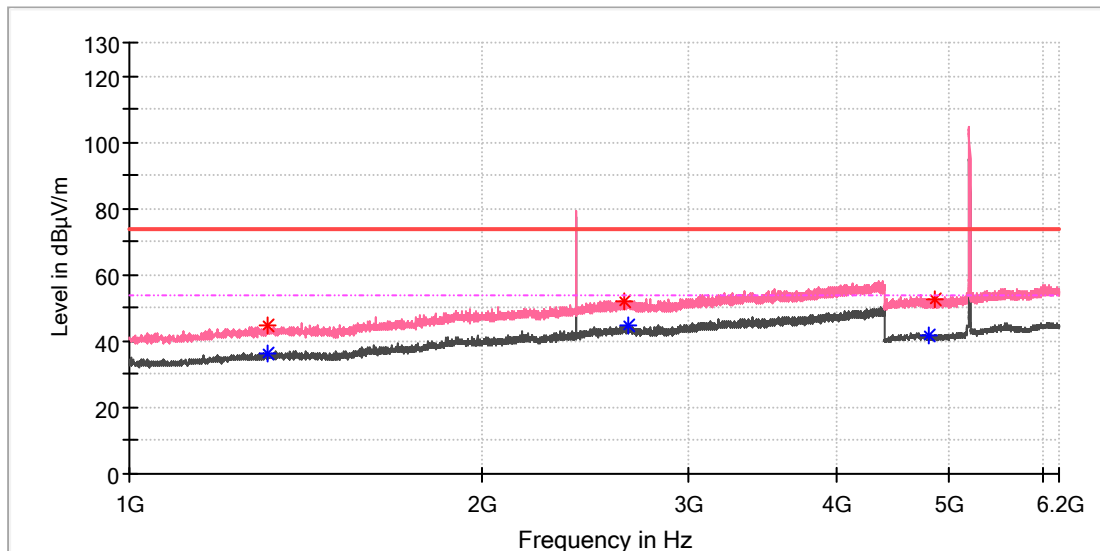

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 1311.000000     | 44.65            | ---              | 74.00          | 29.35       | 150.0       | V   | 1.0           | 2.8          |
| 1311.500000     | ---              | 36.40            | 54.00          | 17.60       | 150.0       | V   | 255.0         | 2.8          |
| 2643.000000     | 52.21            | ---              | 74.00          | 21.79       | 150.0       | V   | 257.0         | 10.1         |
| 2666.500000     | ---              | 45.03            | 54.00          | 8.98        | 150.0       | V   | 4.0           | 10.2         |
| 4810.500000     | ---              | 41.73            | 54.00          | 12.27       | 150.0       | V   | 328.0         | 13.3         |
| 4851.000000     | 52.76            | ---              | 74.00          | 21.24       | 150.0       | V   | 310.0         | 13.3         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: SDR 5G+BLE+WIFI 2437MHz  
Order No/Sample No: 168512858/A003882058-003  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC Part 15C  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

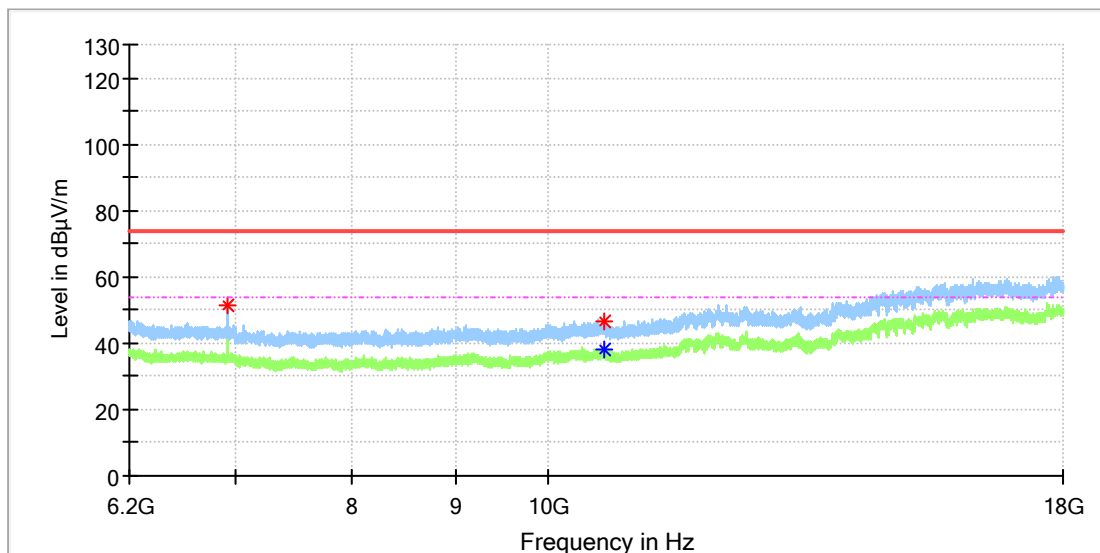

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 6933.075000     | 51.14            | ---              | 74.00          | 22.86       | 150.0       | H   | 79.0          | 8.6          |
| 10652.533333    | ---              | 38.26            | 54.00          | 15.74       | 150.0       | H   | 324.0         | 12.0         |
| 10654.500000    | 46.59            | ---              | 74.00          | 27.41       | 150.0       | H   | 235.0         | 12.0         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         | --- | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: SDR 5G+BLE+WIFI 2437MHz  
Order No/Sample No: 168512858/A003882058-003  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC Part 15C  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

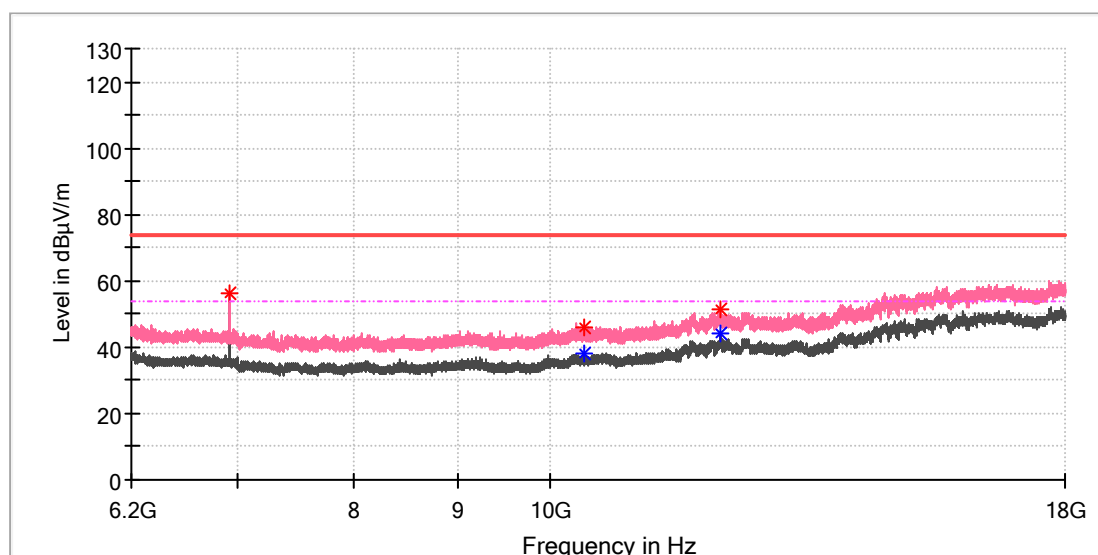

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 6933.075000     | 56.06            | ---              | 74.00          | 17.94       | 150.0       | V   | 50.0          | 8.6          |
| 10394.900000    | 46.02            | ---              | 74.00          | 27.99       | 150.0       | V   | 162.0         | 11.9         |
| 10400.800000    | ---              | 37.80            | 54.00          | 16.20       | 150.0       | V   | 28.0          | 11.9         |
| 12151.133333    | ---              | 43.98            | 54.00          | 10.02       | 150.0       | V   | 73.0          | 16.7         |
| 12152.608333    | 51.45            | ---              | 74.00          | 22.55       | 150.0       | V   | 0.0           | 16.6         |


## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## Appendix A.6: Test Results of Radiated Emissions in Restricted Bands

### EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Matrice 4TD          |
| Model:              | M4TD                     |
| Test Mode:          | BLE 1M_Low channel       |
| Order No/Sample No: | 168512858/A003882058-021 |
| Test Voltage:       | Battery                  |
| Remark:             | Temp 23 Humi:53%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

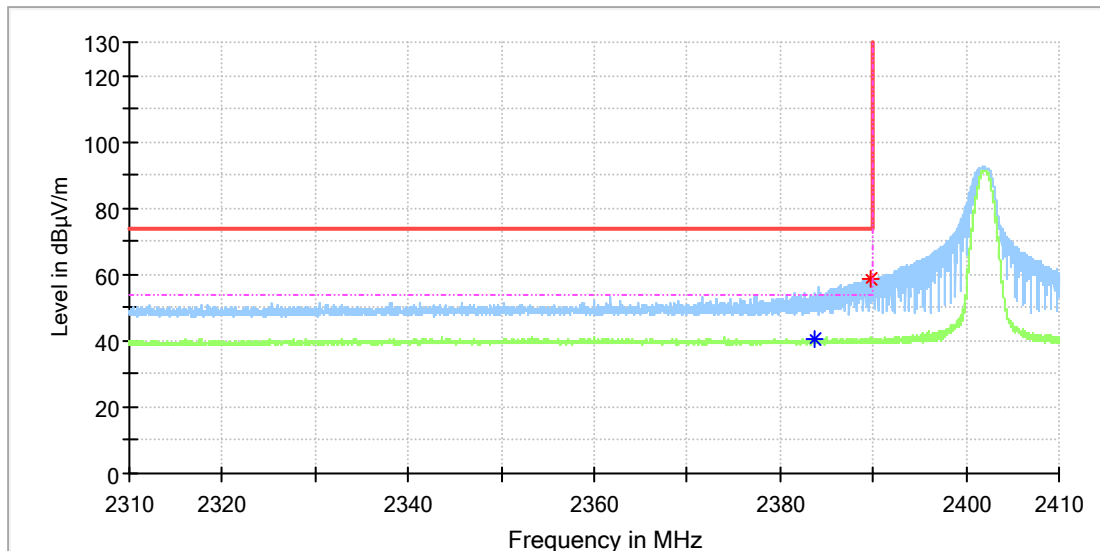

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2383.794118     | ---              | 40.44            | 54.00          | 13.56       | 150.0       | H   | 90.0          | 8.5          |
| 2389.720588     | 58.38            | ---              | 74.00          | 15.62       | 150.0       | H   | 202.0         | 8.5          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Matrice 4TD          |
| Model:              | M4TD                     |
| Test Mode:          | BLE 1M_Low channel       |
| Order No/Sample No: | 168512858/A003882058-021 |
| Test Voltage:       | Battery                  |
| Remark:             | Temp 23 Humi:53%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

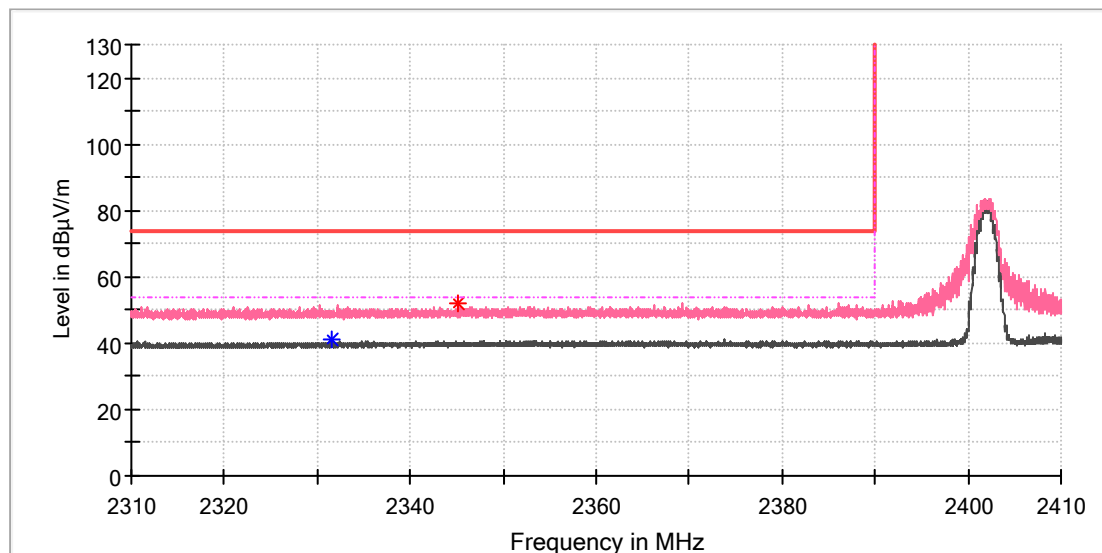

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2331.514706     | ---              | 40.84            | 54.00          | 13.16       | 150.0       | V   | 0.0           | 8.3          |
| 2345.205882     | 52.15            | ---              | 74.00          | 21.85       | 150.0       | V   | 80.0          | 8.4          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_High channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

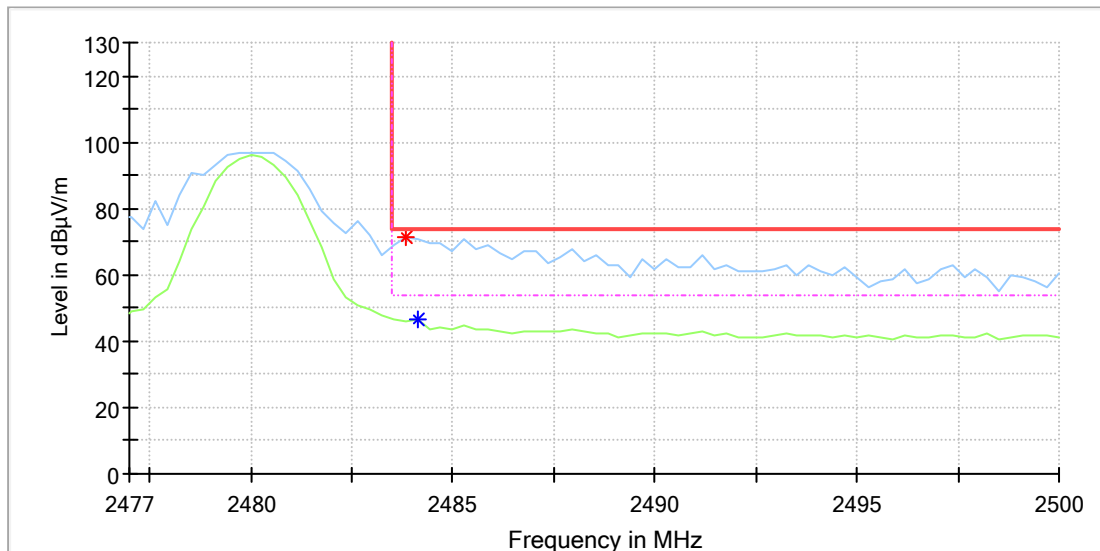

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.823529     | 71.36            | ---              | 74.00          | 2.64        | 150.0       | H   | 168.0         | 9.0          |
| 2484.117647     | ---              | 46.40            | 54.00          | 7.60        | 150.0       | H   | 190.0         | 9.0          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 1M\_High channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

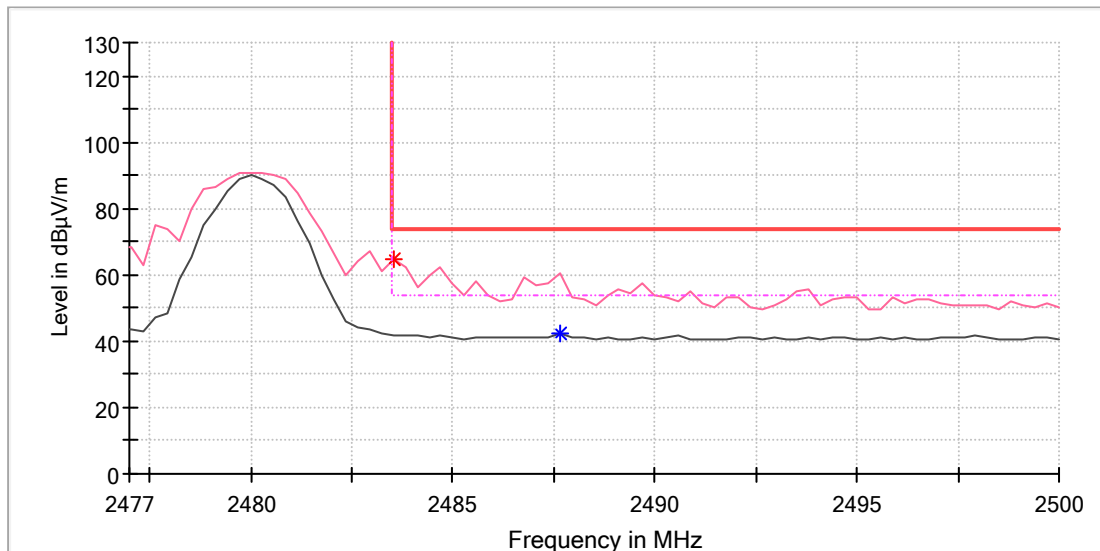

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.529412     | 64.79            | ---              | 74.00          | 9.21        | 150.0       | V   | 219.0         | 9.0          |
| 2487.647059     | ---              | 42.42            | 54.00          | 11.58       | 150.0       | V   | 121.0         | 9.0          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Matrice 4TD          |
| Model:              | M4TD                     |
| Test Mode:          | BLE 2M_Low channel       |
| Order No/Sample No: | 168512858/A003882058-021 |
| Test Voltage:       | Battery                  |
| Remark:             | Temp 23 Humi:53%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

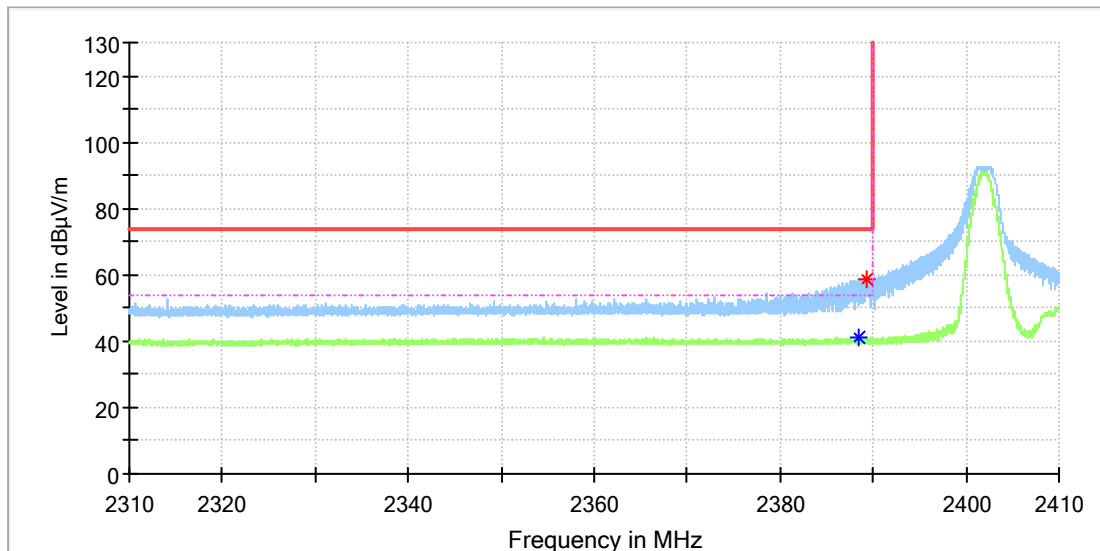

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2388.352941     | ---              | 41.41            | 54.00          | 12.59       | 150.0       | H   | 297.0         | 8.5          |
| 2389.397059     | 58.79            | ---              | 74.00          | 15.21       | 150.0       | H   | 325.0         | 8.5          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 2M\_Low channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

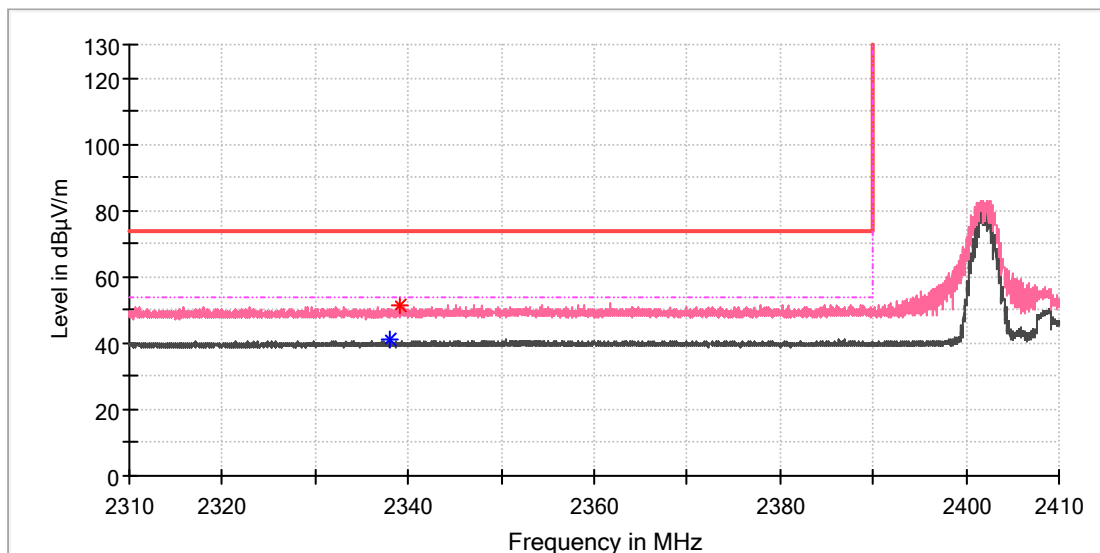

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2337.941177     | ---              | 40.94            | 54.00          | 13.06       | 150.0       | V   | 242.0         | 8.4          |
| 2339.073530     | 51.60            | ---              | 74.00          | 22.40       | 150.0       | V   | 228.0         | 8.4          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 2M\_High channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

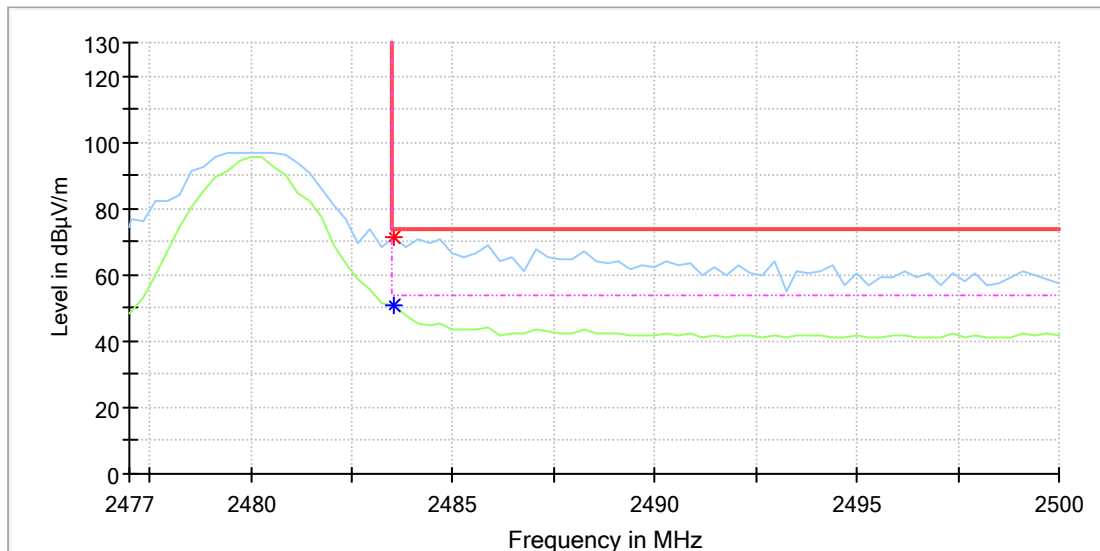

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.529412     | ---              | 50.90            | 54.00          | 3.10        | 150.0       | H   | 350.0         | 9.0          |
| 2483.529412     | 71.24            | ---              | 74.00          | 2.76        | 150.0       | H   | 350.0         | 9.0          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Matrice 4TD  
Model: M4TD  
Test Mode: BLE 2M\_High channel  
Order No/Sample No: 168512858/A003882058-021  
Test Voltage: Battery  
Remark: Temp 23 Humi:53%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

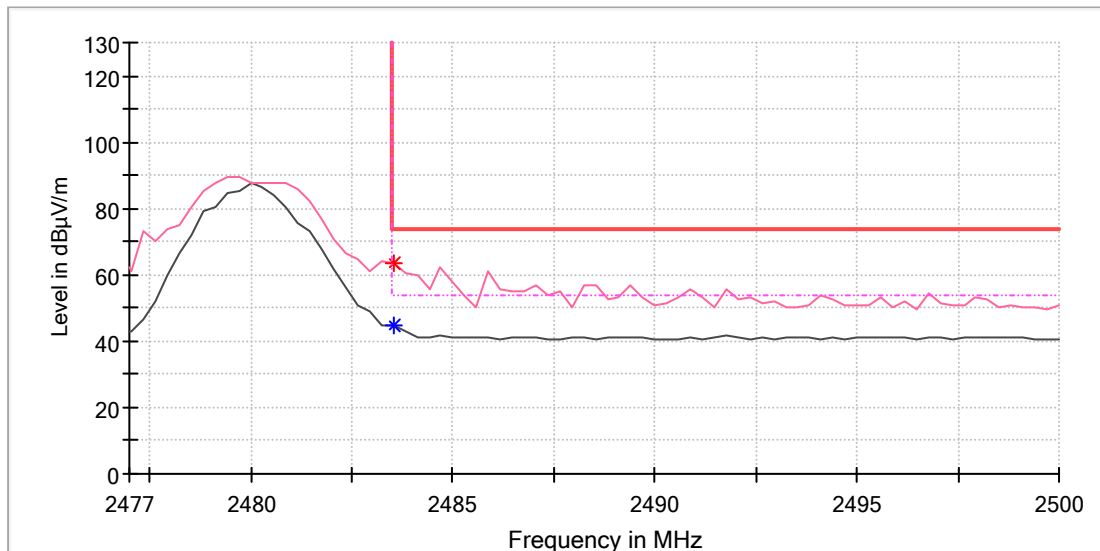

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.529412     | ---              | 44.56            | 54.00          | 9.44        | 150.0       | V   | 118.0         | 9.0          |
| 2483.529412     | 63.57            | ---              | 74.00          | 10.43       | 150.0       | V   | 118.0         | 9.0          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |