

Test Report

Product Name	WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
Model No.	WLE3003HX
FCC ID	TK4WLE3003HX

Applicant	Compex Systems Pte Ltd
Address	No 9 Harrison Road, Harrison Industrial Building, #05-01, Singapore 369651

Date of Receipt	Nov. 09, 2022
Issued Date	Jul. 03, 2023
Report No.	22B0364R-RFUSDFSV02-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.


Test Report



Product Name	WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
Applicant	Compex Systems Pte Ltd
Address	No 9 Harrison Road, Harrison Industrial Building, #05-01, Singapore 369651
Manufacturer	Compex Systems Pte Ltd
Model No.	WLE3003HX
FCC ID	TK4WLE3003HX
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V / 60Hz
Trade Name	Compex
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E 15.407 (h) KDB 905462
Test Result	Complied

Documented By


:



(Supervisor / Jinn Chen)

Tested By

:



(Senior Engineer / Benjamin Pan)

Approved By

:



(Senior Engineer / Alan Chen)

TABLE OF CONTENTS

1. General Information.....	5
1.1. Standard Requirement	5
1.2. EUT Description	6
1.3. UNII Device Description	8
1.4. Test Facility	9
1.5. Test Equipment	10
1.6. Uncertainty	11
1.7. Summary of Test Results	12
2. Test Setup 13	
2.1. DFS Detection Thresholds	13
2.2. Radar Test Waveforms	15
2.3. Radar Waveform Calibration	18
2.4. Radar Waveform Calibration Result	19
2.5. Master Data Traffic Plot Result	35
3. UNII Detection Bandwidth	39
3.1. Test Procedure	39
3.2. Test Requirement	39
3.3. Test Result of UNII Detection Bandwidth.....	42
4. Initial Channel Availability Check Time.....	53
4.1. Test Procedure	53
4.2. Test Requirement	53
4.3. Test Result of Initial Channel Availability Check Time	54
5. Radar Burst at the Beginning of the Channel Availability Check Time	55
5.1. Test Procedure	55
5.2. Test Requirement	55
5.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time	56
6. Radar Burst at the End of the Channel Availability Check Time.....	57
6.1. Test Procedure	57
6.2. Test Requirement	57
6.3. Test Result of Radar Burst at the End of the Channel Availability Check Time	58
7. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	59
7.1. Test Procedure	59
7.2. Test Requirement	59
7.3. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	60
8. Statistical Performance Check	62
8.1. Test Procedure	62
8.2. Test Requirement	62
8.3. Test Result of Statistical Performance Check	64

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 22B0364R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
22B0364R-RFUSDFSV02-A	V1.0	Initial issue of report.	Jul. 03, 2023

1. General Information

1.1. Standard Requirement

FCC Part 15.407:

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm. A TPC mechanism is not required for systems with an E.I.R.P. of less than 500mW.

U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

1.2. EUT Description

Product Name	WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
Trade Name	Compex
FCC ID	TK4WLE3003HX
Model No.	WLE3003HX
Frequency Range	802.11a/n/ac/ax-20 MHz: 5180-5320 MHz, 5500-5720 MHz, 5745-5825 MHz 802.11n/ac/ax-40 MHz: 5190-5310 MHz, 5510-5710 MHz, 5755-5795 MHz 802.11ac/ax-80 MHz: 5210-5290 MHz, 5530-5690 MHz, 5775 MHz 802.11ac/ax-160 MHz: 5250 MHz, 5570 MHz
Number of Channels	802.11a/n/ac/ax-20 MHz: 25CH, 802.11n/ac/ax-40 MHz: 12CH 802.11ac/ax-80 MHz: 6CH, 802.11ac/ax-160 MHz: 2 CH
Data Rate	802.11a: 6 – 54 Mbps, 802.11n: up to 450 Mbps 802.11ac: up to 2340 Mbps, 802.11ax: up to 3603 Mbps
Type of Modulation	OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM OFDMA, BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Channel Control	Auto
Channel Bandwidth	20/40/80/160 MHz
DFS Function	☒ Master ☐ Slave
TPC Function	☒ <500mW not required ☐ $\geq$ 500mW employ a TPC*
Communication Mode	☒ IP Based Systems ☐ Frame Based System ☐ Other System
USB Cable	Shielded, 1m
LAN Cable *2	Shielded, 1.85m
Power Adapter (1)	MFR: FSP, M/N: FSP040-DHAN3 Input: AC 100-240V~, 1.5A 50-60Hz Output: 12.0V $\overline{=}$ 3.33A 40.0W Cable out: Non-shielded, 1.2m.
Power Adapter (2)	MFR: DELTA, M/N: DSP-40AB-11 Input: AC 100-240V~/1.2A 50Hz - 60Hz Output: 12V $\overline{=}$ 3.33A Max. Cable out: Non-shielded, 1.2m. 1 ferrite core bonded.
Platform	Product name: Security Appliance Trade Name: Check Point Model No.: V90W FCC ID: TK4WLE3003HX

802.11a/n/ac/ax-20 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36		40	5200	44	5220	48	5240
52	5260	56	5280	60	5300	64	5320
100	5500	104	5520	108	5540	112	5560
116	5580	120	5600	124	5620	128	5640
132	5660	136	5680	140	5700	144	5720
149	5745	153	5765	157	5785	161	5805
165	5825	--	--	--	--	--	--

802.11n/ac/ax-40 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	54	5270	62	5310
102	5510	110	5550	118	5590	126	5630
134	5670	142	5710	151	5755	159	5795

802.11ac/ax-80MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	122	5610
138	5690	155	5775	--	--	--	--

802.11ac/ax-160 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
50	5250	114	5570	--	--	--	--

Test Mode	Mode 1	Transmit (802.11ax-20 MHz) Transmit (802.11ax-40 MHz) Transmit (802.11ax-80 MHz) Transmit (802.11ax-160 MHz)
-----------	--------	---

1.3. UNII Device Description

(1) The EUT operates in the following DFS band:

1. 5250-5350 MHz
2. 5470-5725 MHz

(2) The U-NII device maximum power is 24.90 dBm(E.I.R.P).

Master mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0 dBi gain was used to set the -61 dBm threshold level (-62dBm +1 dB) during calibration of the test setup.

Slave mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -63 dBm threshold level (-64dBm +1 dB) during calibration of the test setup.

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	INPAQ	RFDPA171300SBLB801	Dipole	3.00 dBi for 5250-5350 MHz 4.29 dBi for 5470-5725 MHz

(3) WLAN traffic is generated by the test software “Iperf.exe” from the Master device to the Slave device in the transfer data rate >17%.

(4) For the 5250-5350 MHz and 5470-5725MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

(5) Master mode:

The client device is a Notebook pc contains Intel WLAN radio Module card (Model: AX200NGW). The Intel WLAN Module card FCC ID: PD9AX200NG.

(6) This device does not support partial RU function.

1.4. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	23.1 °C
	Humidity (%RH)	10~90 %	69.1 %

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd

Address : No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan

Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.

Phone Number : +886-3-275-7255

Fax Number : +886-3-327-8031

Email Address : info.tw@dekra.comWebsite : <http://www.dekra.com.tw>

1.5. Test Equipment

Dynamic Frequency Selection (DFS) / HY-SR06

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer	R&S	FSV3044	101115	2023.01.06
Vector Signal Generator	R&S	SMBV100A	261757	2022.12.20
Horn Antenna	ETS-Lindgren	3117	00201259	2022.11.09
Horn Antenna	ETS-Lindgren	3117	00227709	2022.11.09

Instrument	Manufacturer	Type No.	Serial No
Notebook Pc	Dell	Inspiron 14 5459	1599Q72
RF Cable	WOKEN	L1406-031C	S02-130729-305
RF Cable	SUHNER	SUCOFLEX 106	3474516
Access Point	ASUS	RT-AX88U	JCITHP000040

Software	Manufacturer	Function
R&S Pulse Sequencer DFS V 2.3,7.3.2022 Build: 8101 Rev: 6527	R&S	Radar Signal Generation Software
Iperf v2.0.8	iperf.fr	Streaming data

1.6. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.


Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
UNII Detection Bandwidth	$\pm 2.31\text{ms}$
Initial Channel Availability Check Time	$\pm 2.31\text{ms}$
Radar Burst at the Beginning of the Channel Availability Check Time	$\pm 2.31\text{ms}$
Radar Burst at the End of the Channel Availability Check Time	$\pm 2.31\text{ms}$
In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	$\pm 2.31\text{ms}$
Statistical Performance Check	$\pm 2.31\text{ms}$

1.7. Summary of Test Results

Test item	Result
UNII Detection Bandwidth	Pass
Initial Channel Availability Check Time	Pass
Radar Burst at the Beginning of the Channel Availability Check Time	Pass
Radar Burst at the End of the Channel Availability Check Time	Pass
In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	Pass
Statistical Performance Check	Pass
UNII Detection Bandwidth	Pass

2. Test Setup

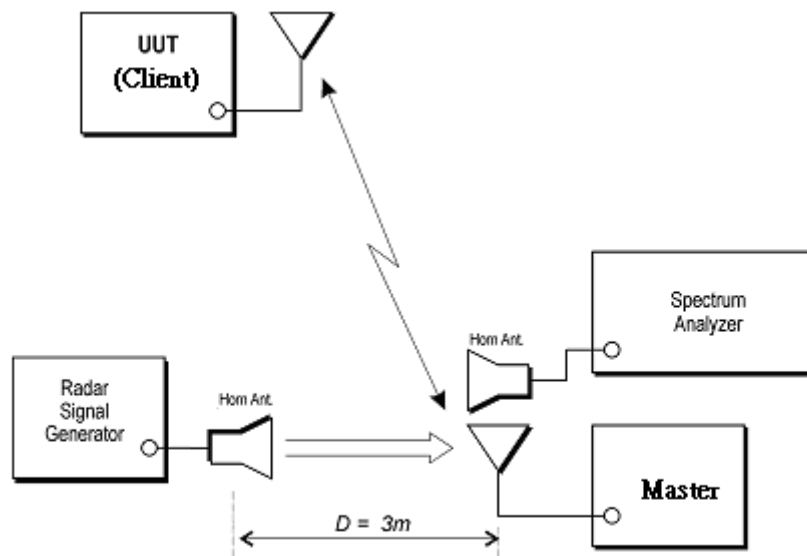

2.1. DFS Detection Thresholds

(1) Interference Threshold value, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

(2) DFS Response requirement values

Parameter	Value
Non-Occupancy Period	Minimum 30 Minutes
Channel Availability Check Time	60 Seconds
Channel Move Time	10 Seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period (See Notes 1 and 2)
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

2.2. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

(1) Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

(2) Long Pulse Radar Test Signal

Radar Waveform	Bursts	Number of Pulses Per Burst	Pulse Width (usec)	Chirp Width (MHz)	PRI (usec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the long pulse radar test signal. If more than 30 waveforms are used for the long pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical Representation of a Long Pulse radar Test Waveform

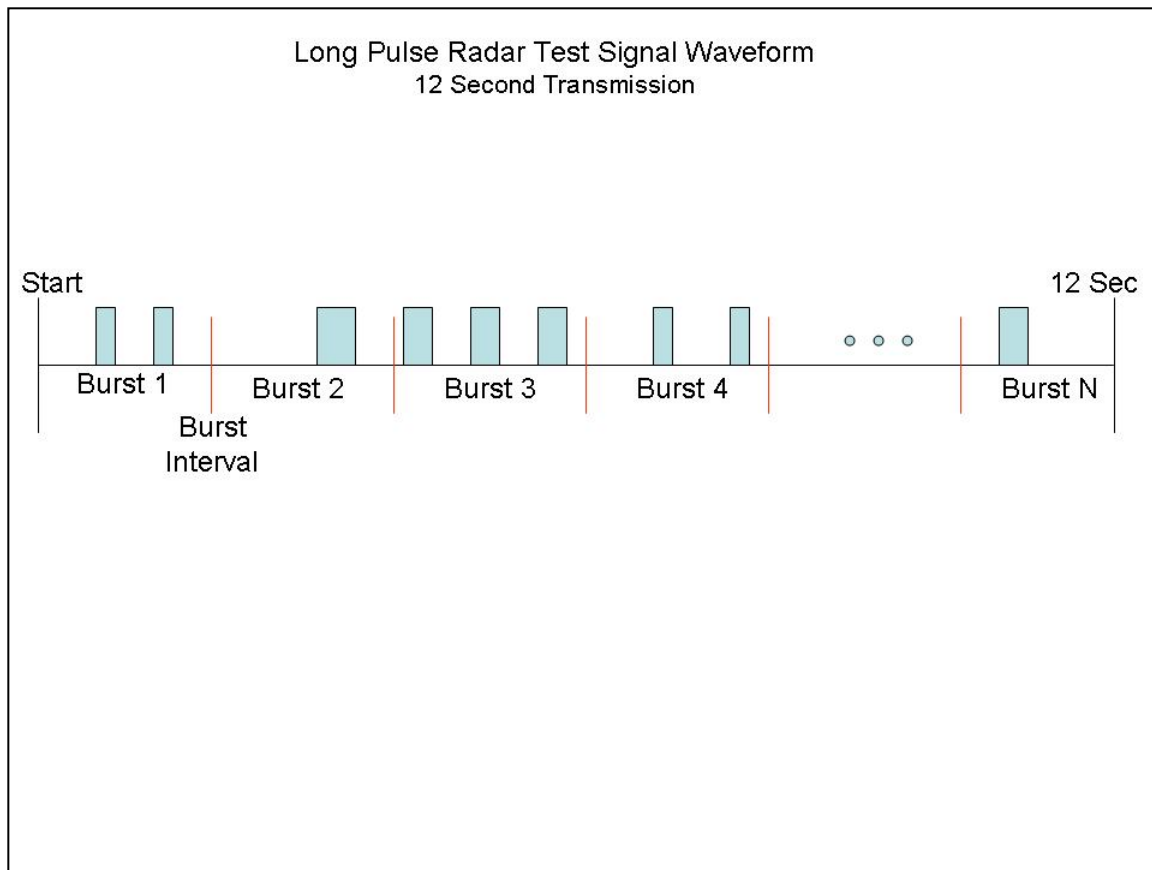

(3) Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μSec)	PRI (μSec)	Hopping Sequence Length (msec)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

2.3. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were replace 50ohm terminal from master and client device and no transmissions by either the master or client device. The spectrum analyzer was switched to the zero span (time domain) at the frequency of the radar waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz and 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm due to the interference threshold level is not required.

Radiated Calibration Setup

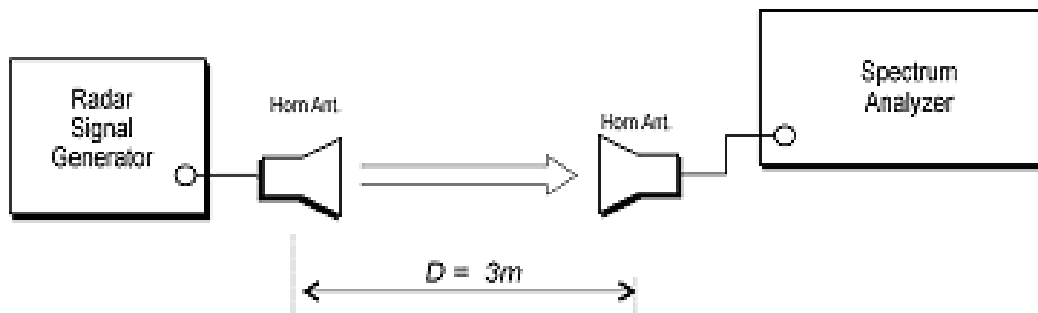


2.4. Radar Waveform Calibration Result

Radar Type 0
Calibration Plot (5500 MHz)

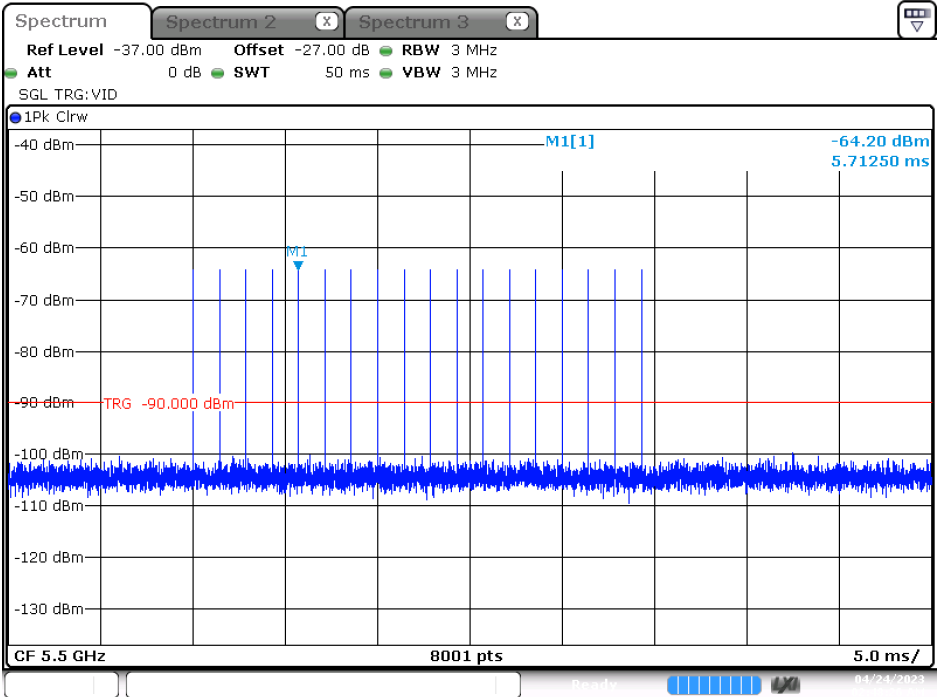


Date: 24.APR.2023 02:48:26

Calibration Plot (5510 MHz)

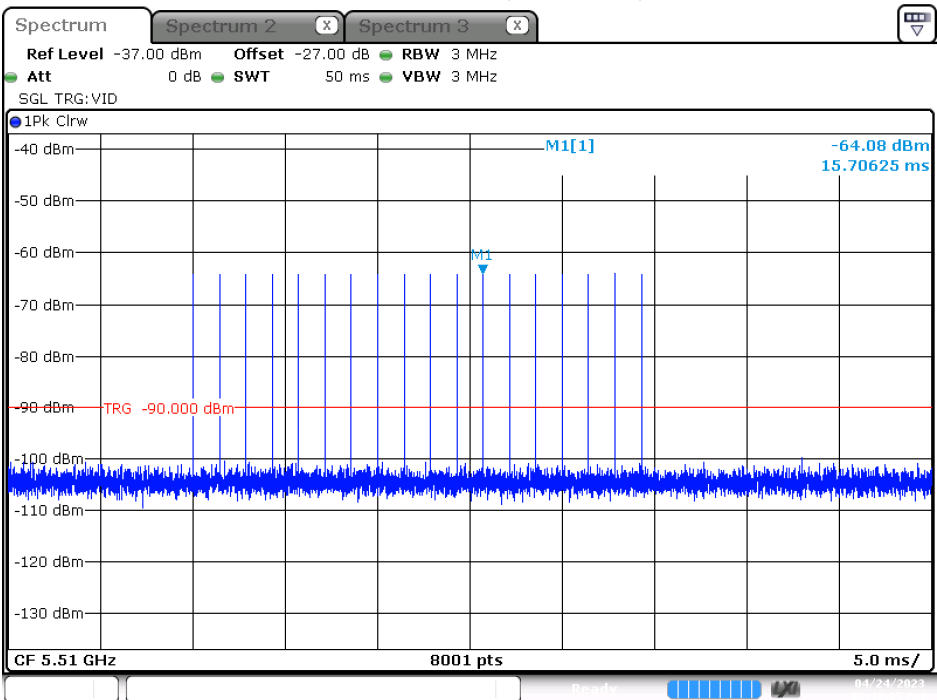


Date: 24.APR.2023 02:49:05

Calibration Plot (5530 MHz)

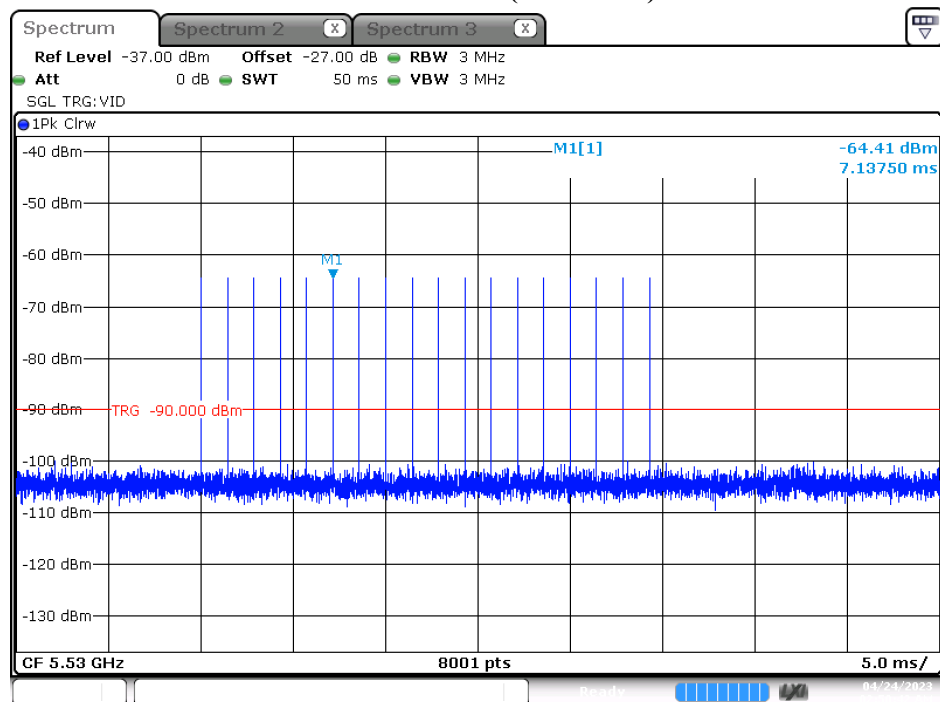

Date: 24.APR.2023 02:50:42


Calibration Plot (5570 MHz)

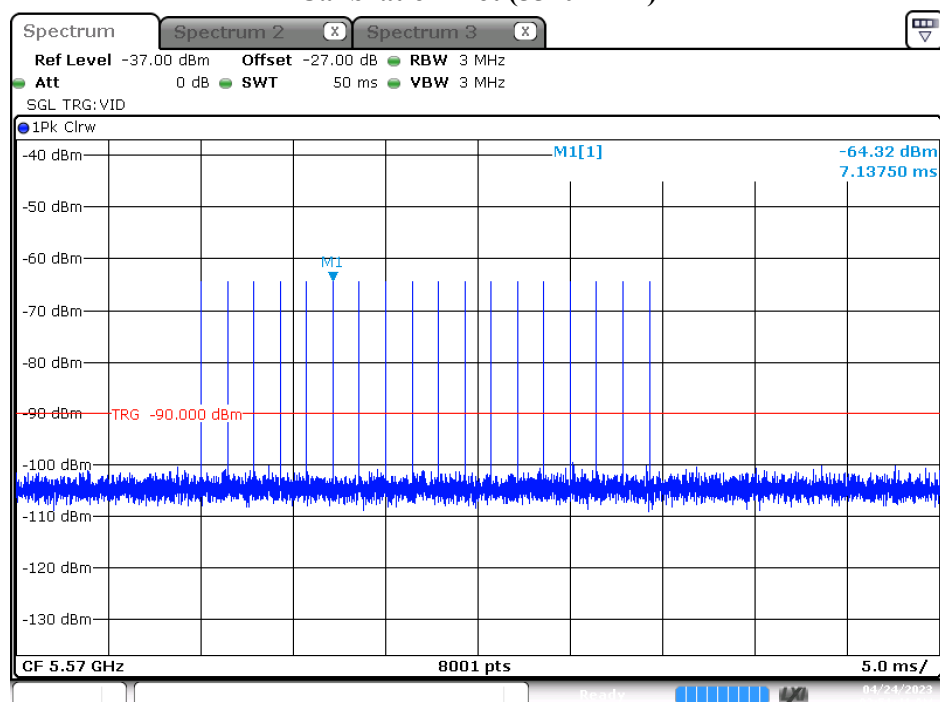

Date: 24.APR.2023 02:51:42


Radar Type 1-A

Calibration Plot (5500 MHz)

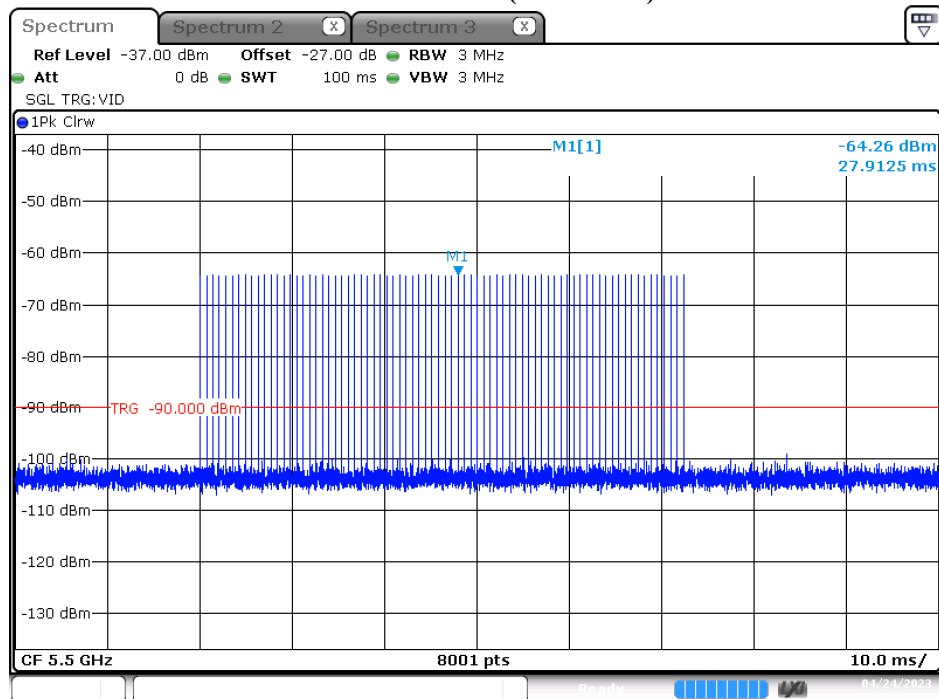


Date: 24.APR.2023 04:19:10

Calibration Plot (5510 MHz)

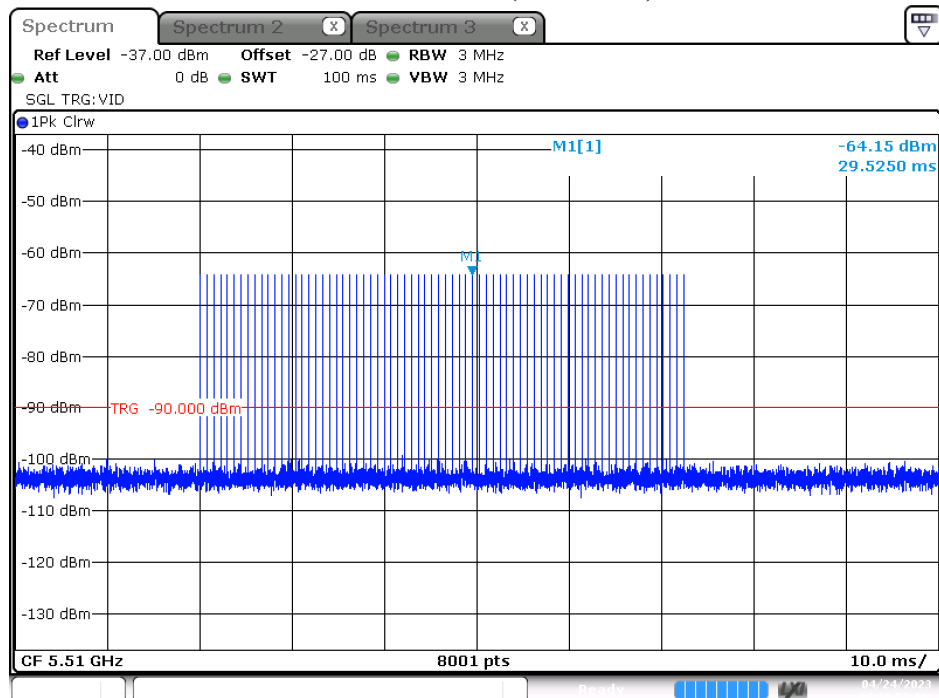


Date: 24.APR.2023 04:16:59

Calibration Plot (5530 MHz)

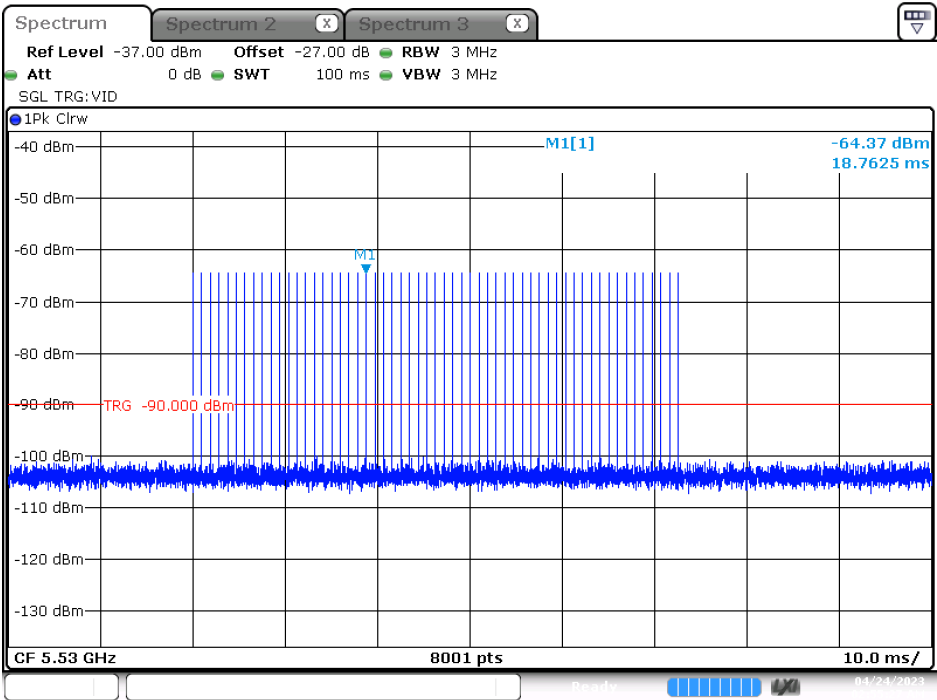

Date: 24.APR.2023 02:55:26


Calibration Plot (5570 MHz)

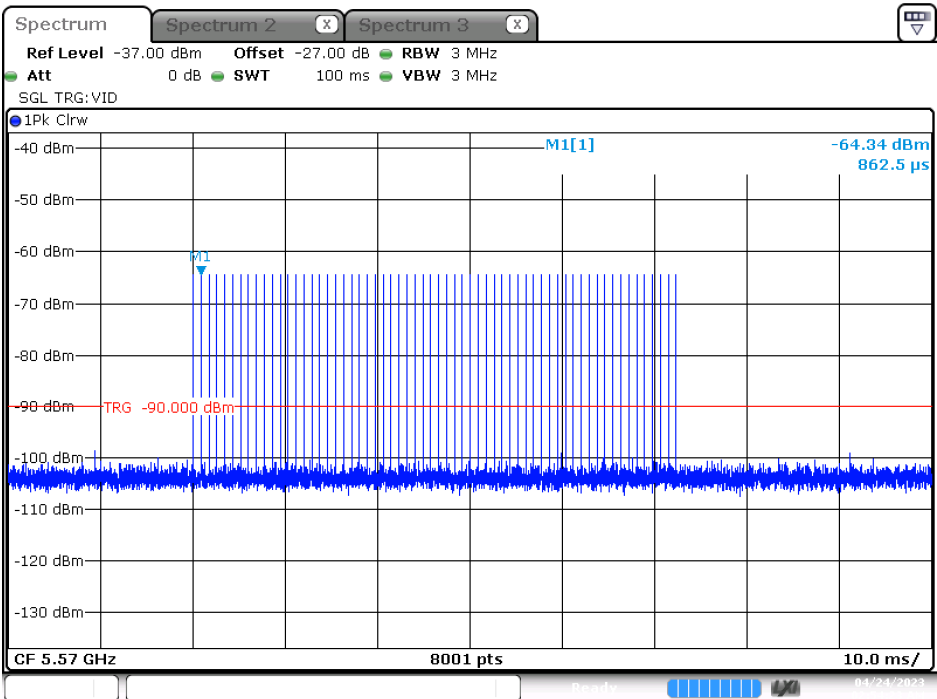

Date: 24.APR.2023 02:54:23


Radar Type 1-B

Calibration Plot (5500 MHz)

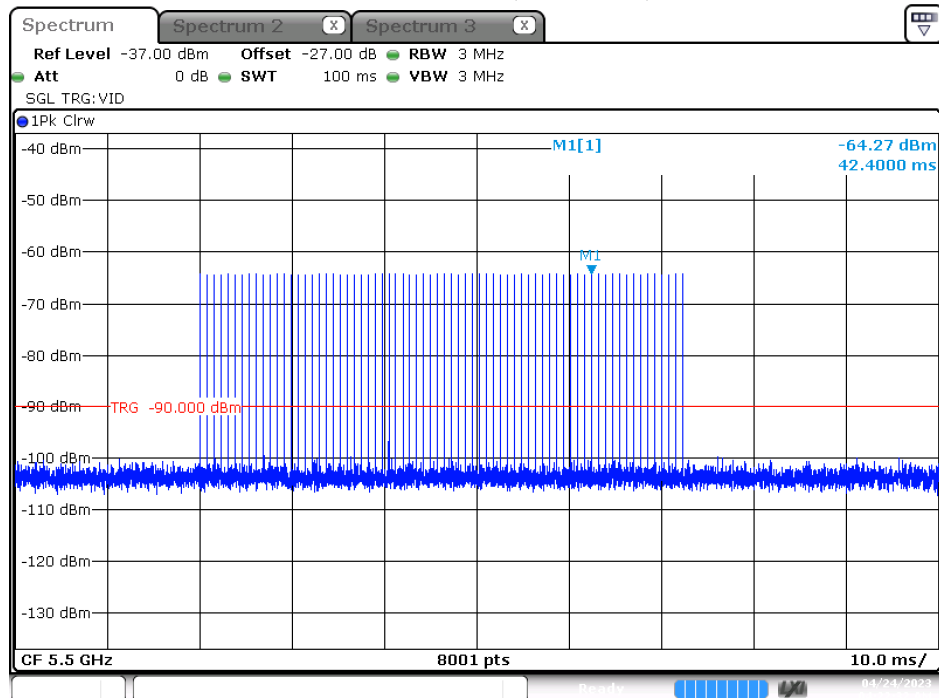


Date: 24.APR.2023 04:22:32

Calibration Plot (5510 MHz)

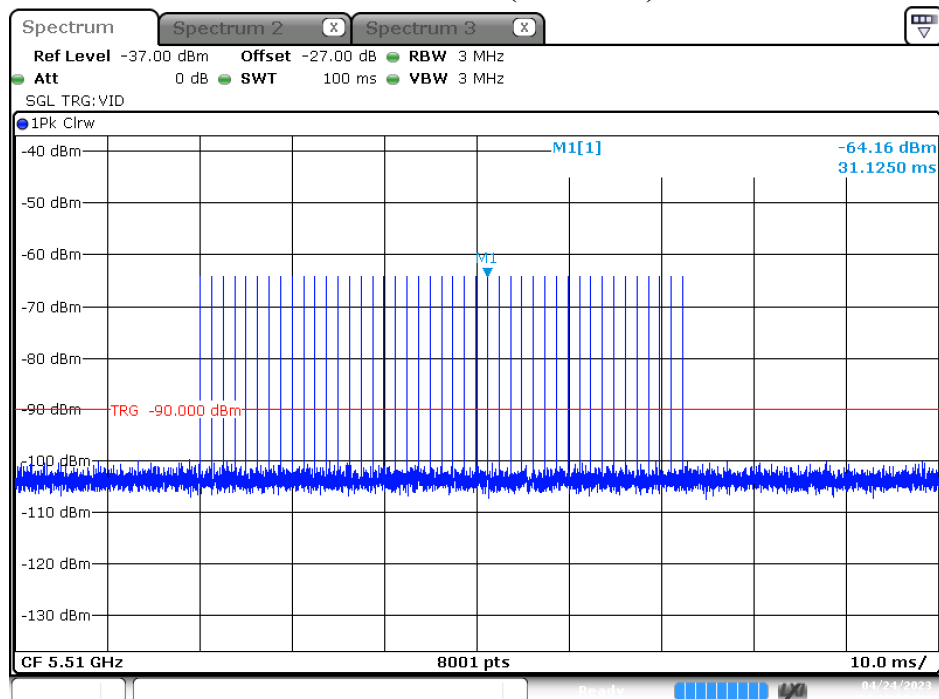


Date: 24.APR.2023 04:16:07

Calibration Plot (5530 MHz)

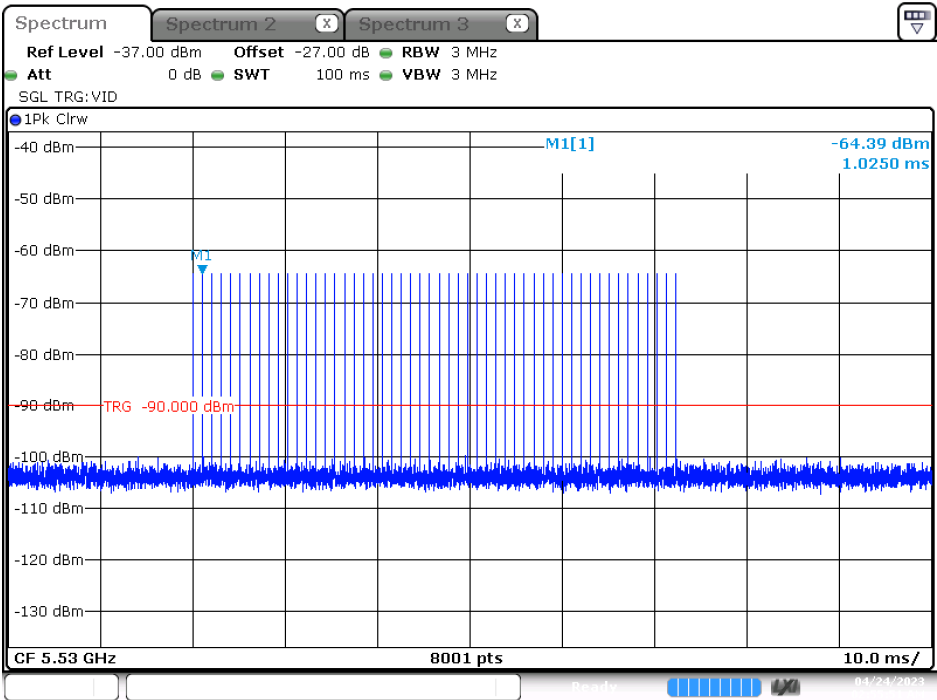


Date: 24.APR.2023 02:55:51

Calibration Plot (5570 MHz)

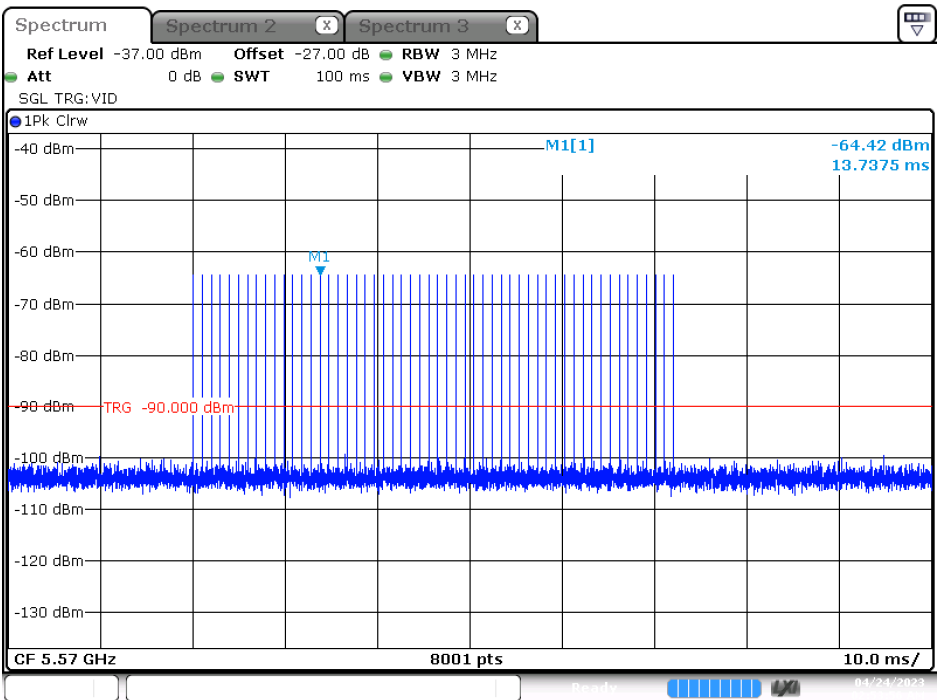


Date: 24.APR.2023 02:53:57

Radar Type 2
Calibration Plot (5500 MHz)

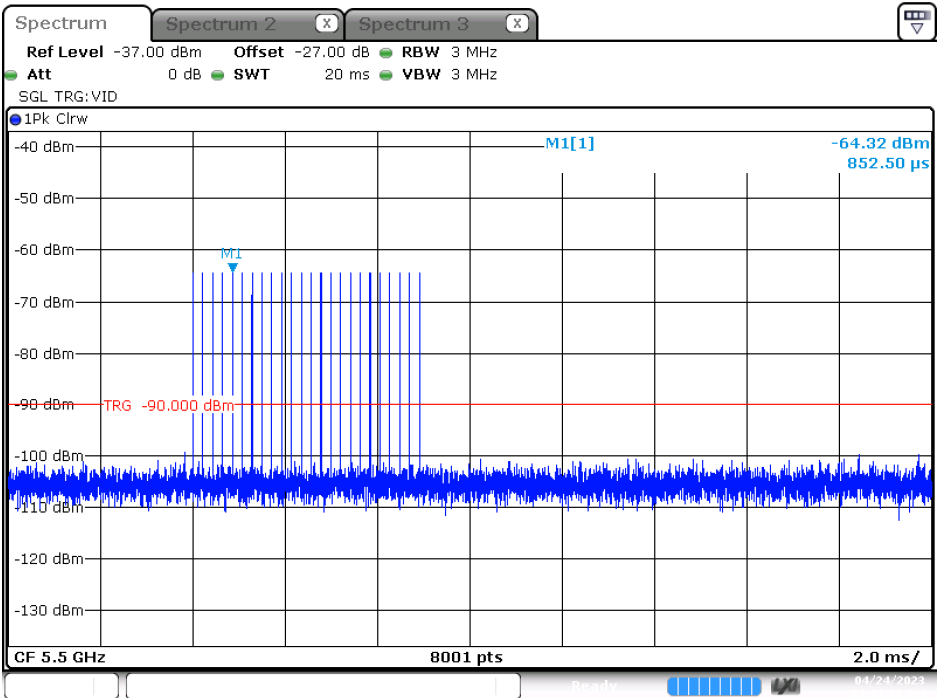


Date: 24.APR.2023 04:31:36

Calibration Plot (5510 MHz)

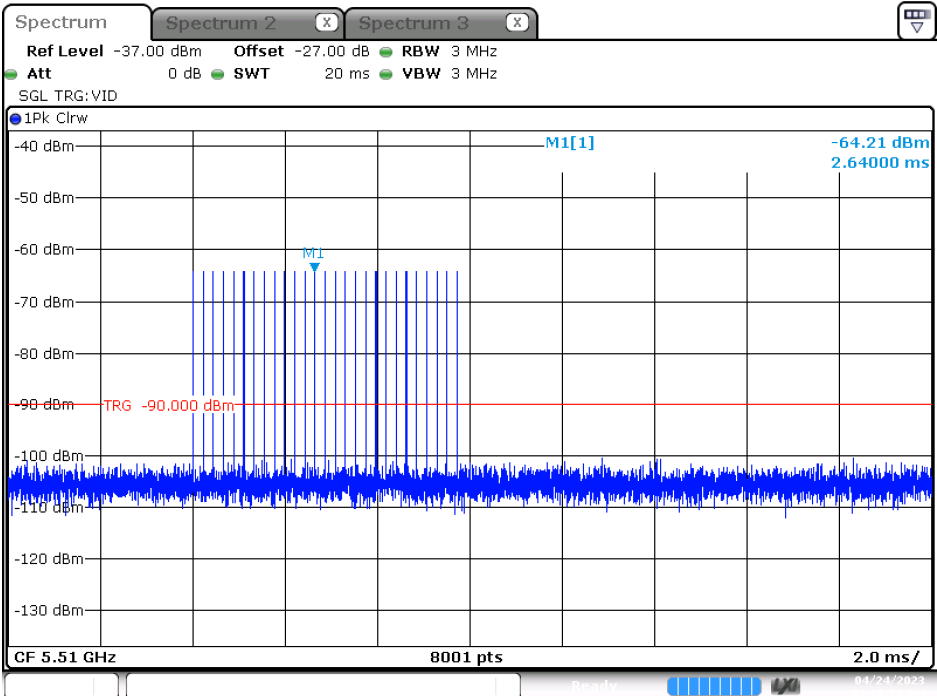


Date: 24.APR.2023 04:29:54

Calibration Plot (5530 MHz)

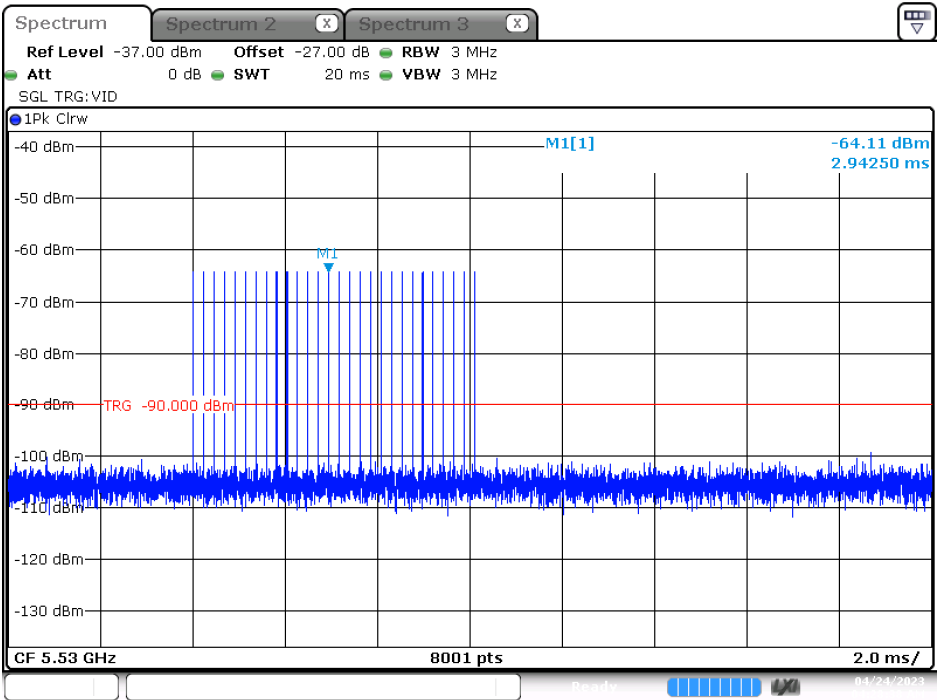


Date: 24.APR.2023 04:28:38

Calibration Plot (5570 MHz)

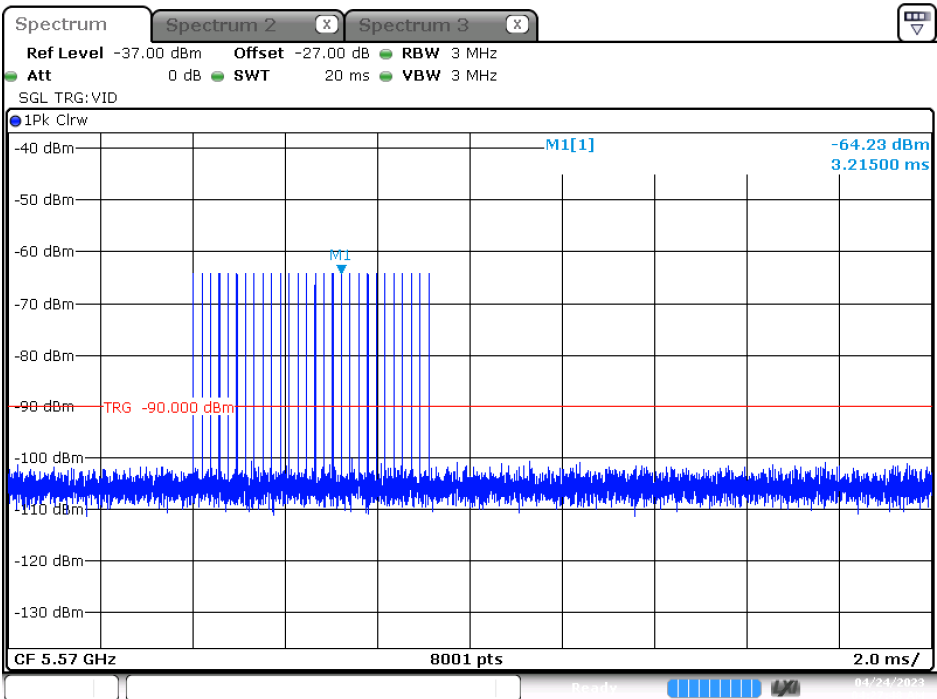


Date: 24.APR.2023 04:27:48

Radar Type 3
Calibration Plot (5500 MHz)

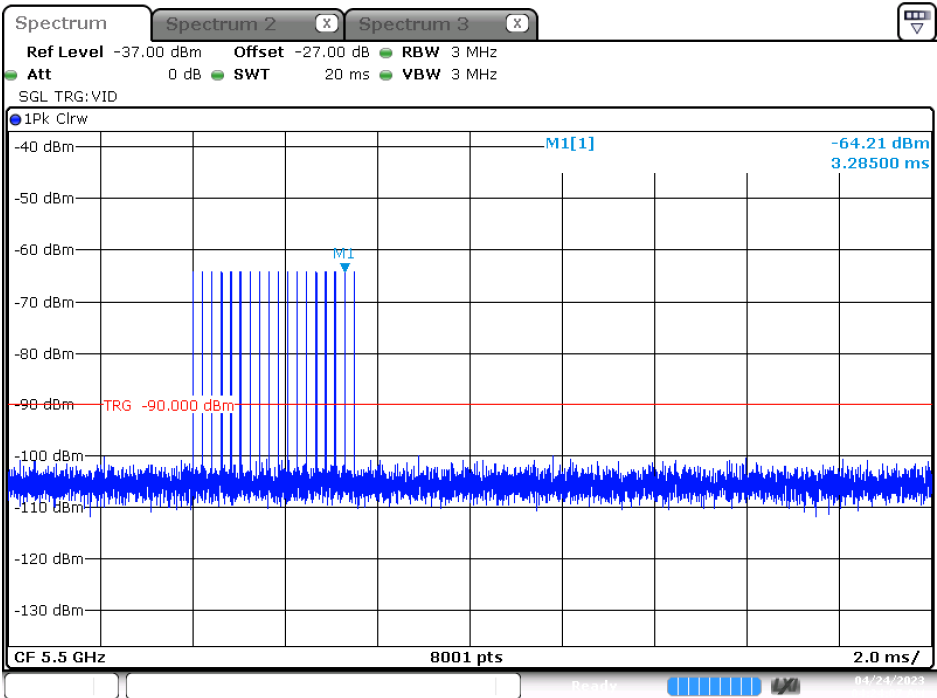


Date: 24.APR.2023 04:24:07

Calibration Plot (5510 MHz)

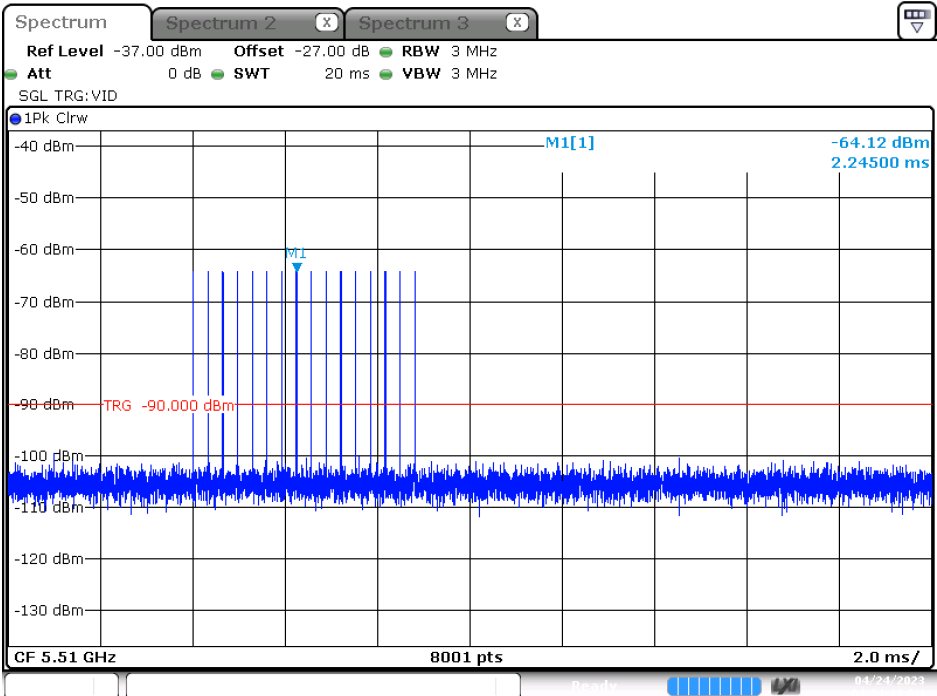


Date: 24.APR.2023 04:24:43

Calibration Plot (5530 MHz)

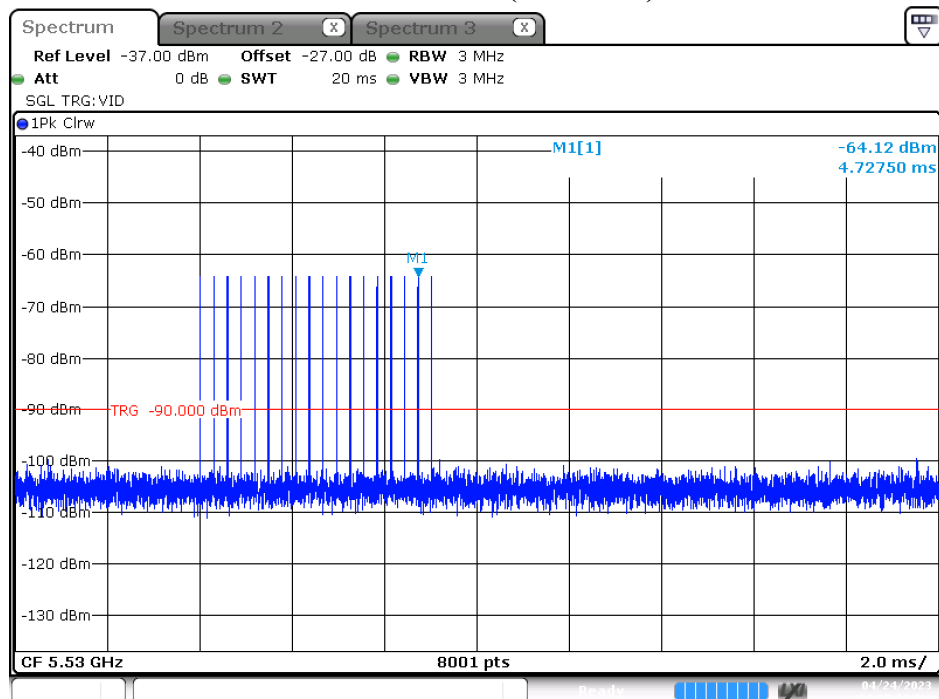


Date: 24.APR.2023 04:25:21

Calibration Plot (5570 MHz)

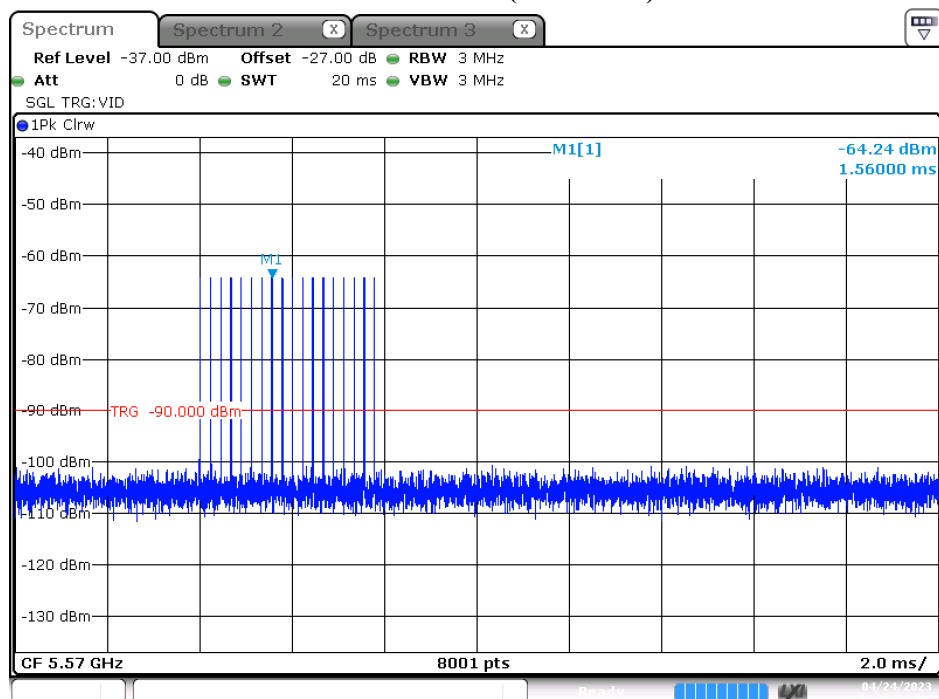


Date: 24.APR.2023 04:26:36

Radar Type 4
Calibration Plot (5500 MHz)

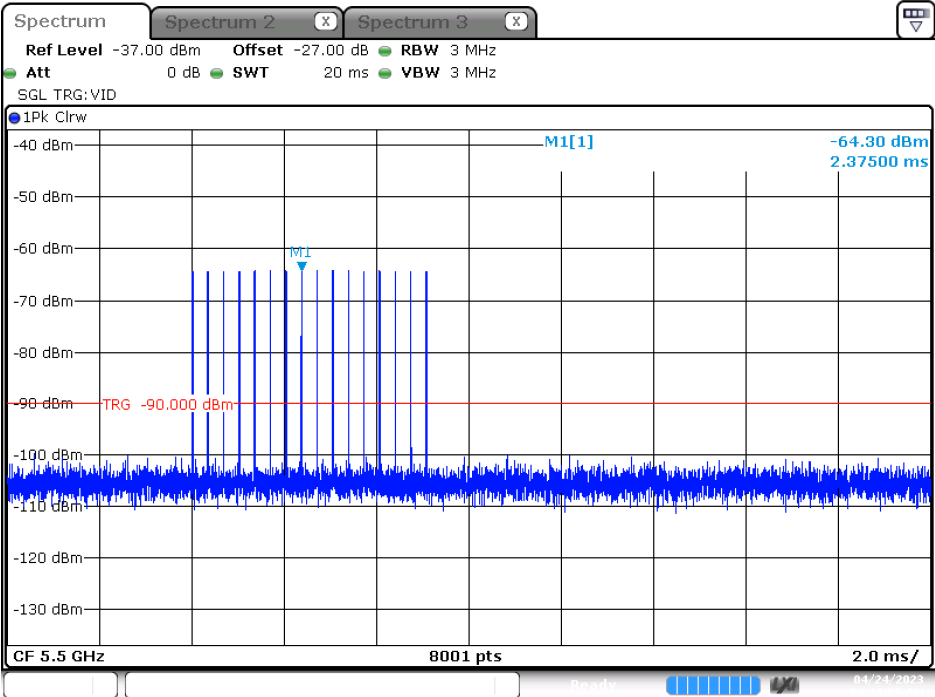


Date: 24.APR.2023 04:33:08

Calibration Plot (5510 MHz)

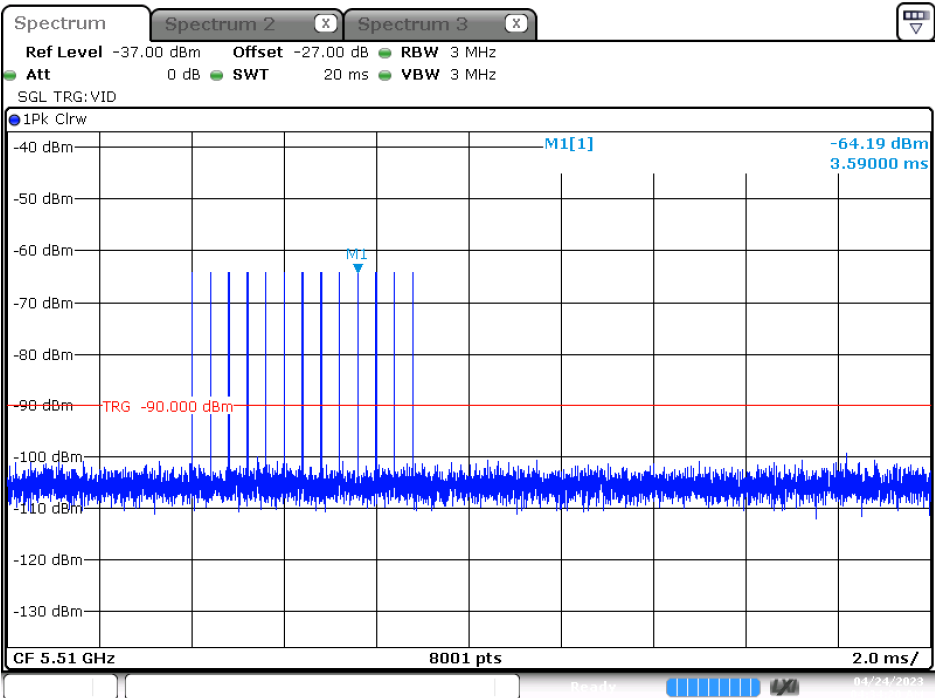


Date: 24.APR.2023 04:34:20

Calibration Plot (5530 MHz)

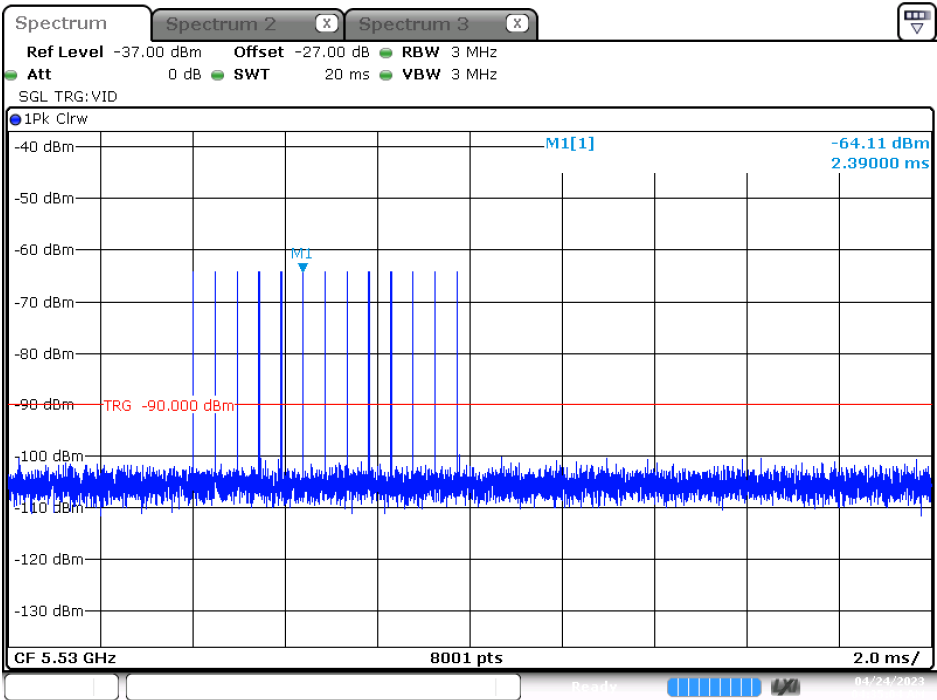

Date: 24.APR.2023 04:36:05


Calibration Plot (5570 MHz)

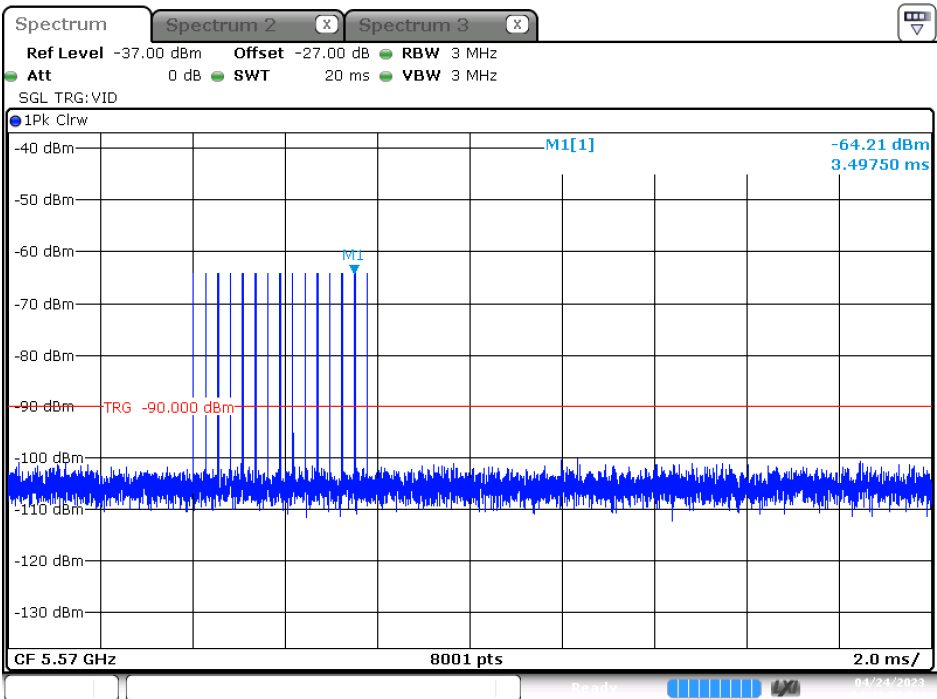

Date: 24.APR.2023 04:41:58


Radar Type 5

Calibration Plot (5500 MHz)

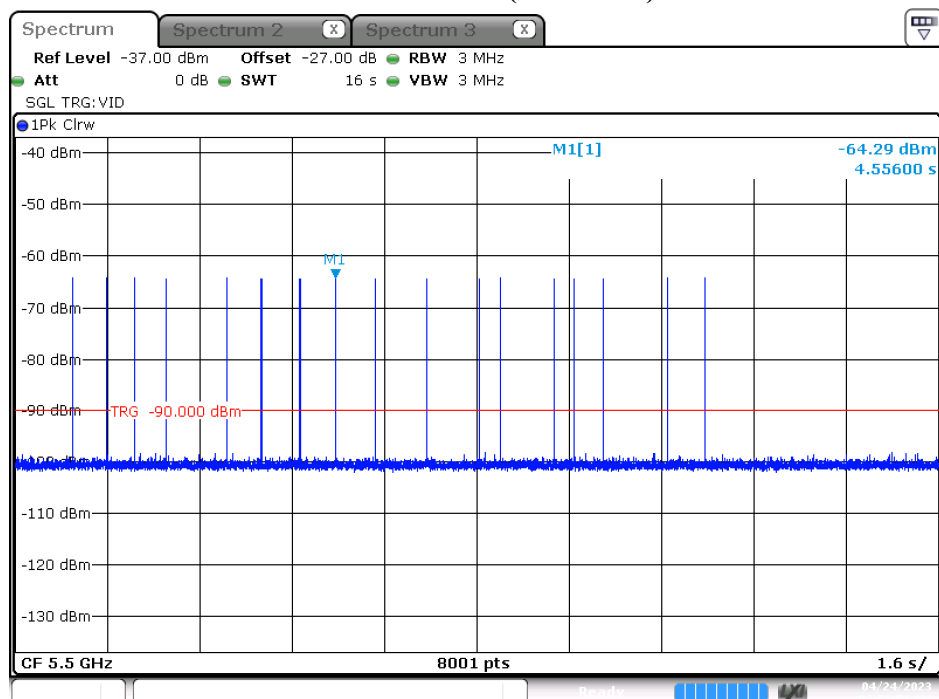


Date: 24.APR.2023 04:51:52

Calibration Plot (5510 MHz)

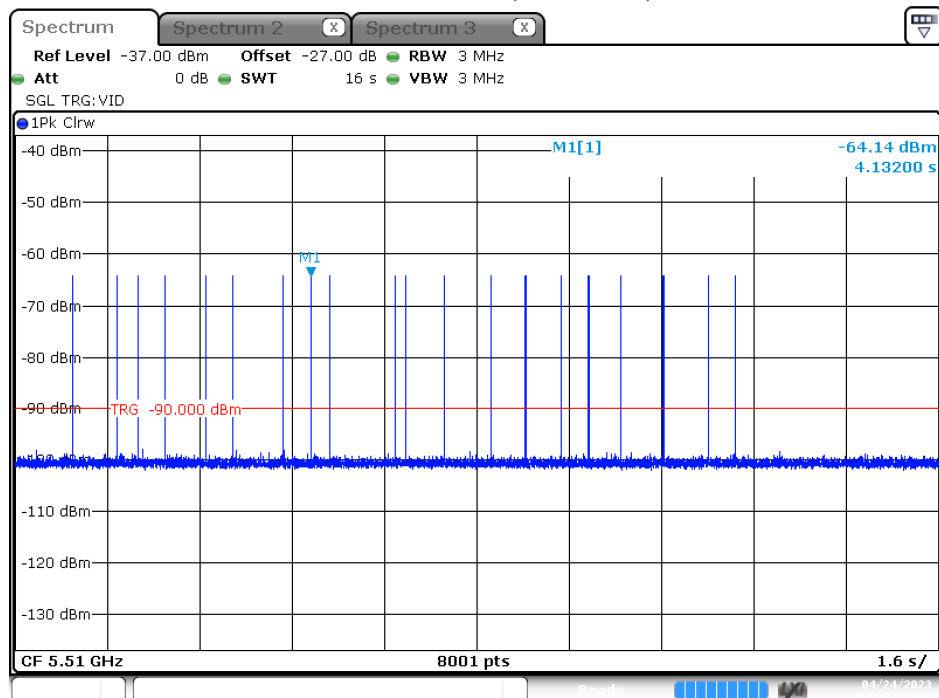


Date: 24.APR.2023 04:52:43

Calibration Plot (5530 MHz)

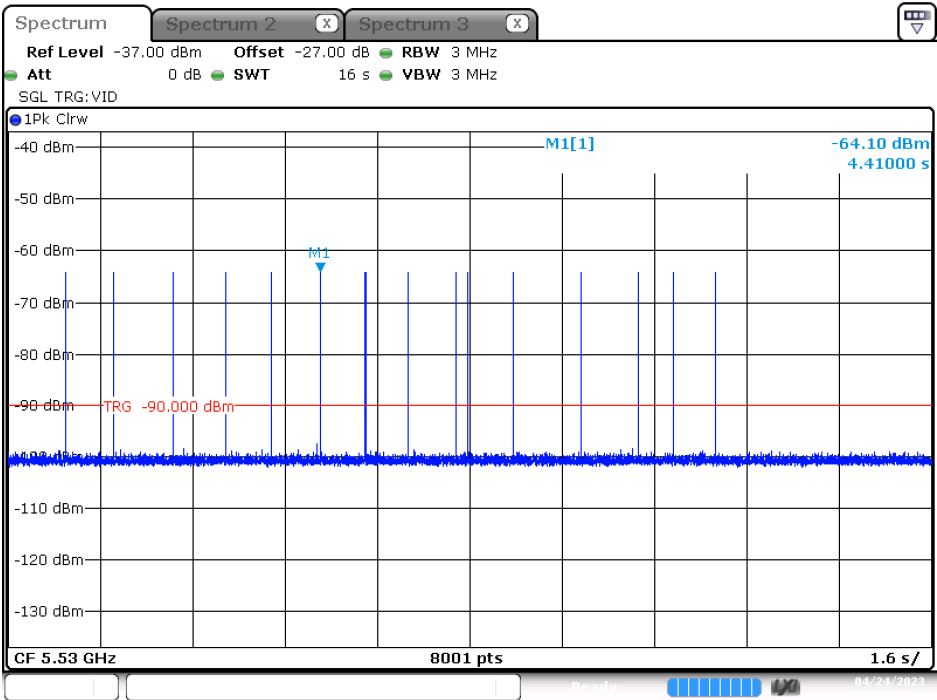


Date: 24.APR.2023 04:54:25

Calibration Plot (5570 MHz)

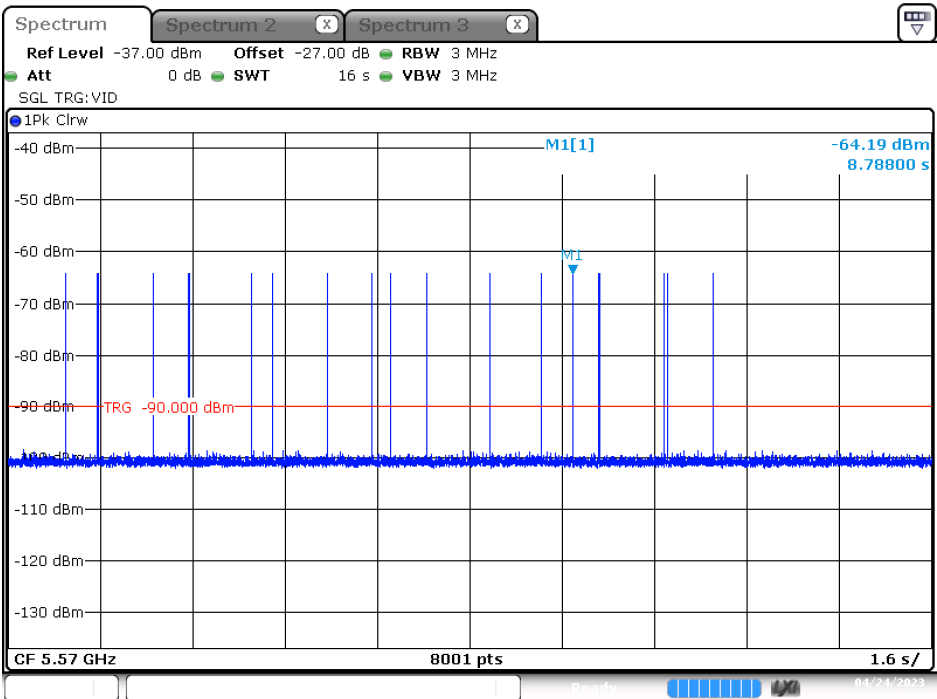


Date: 24.APR.2023 04:58:57

Radar Type 6
Calibration Plot (5500 MHz)

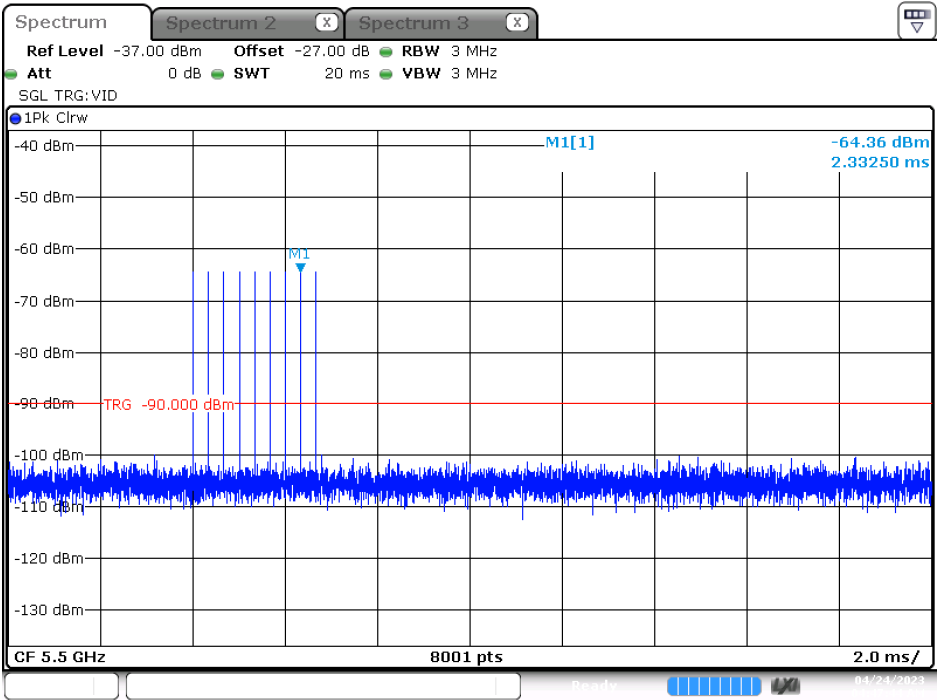


Date: 24.APR.2023 04:47:44

Calibration Plot (5510 MHz)

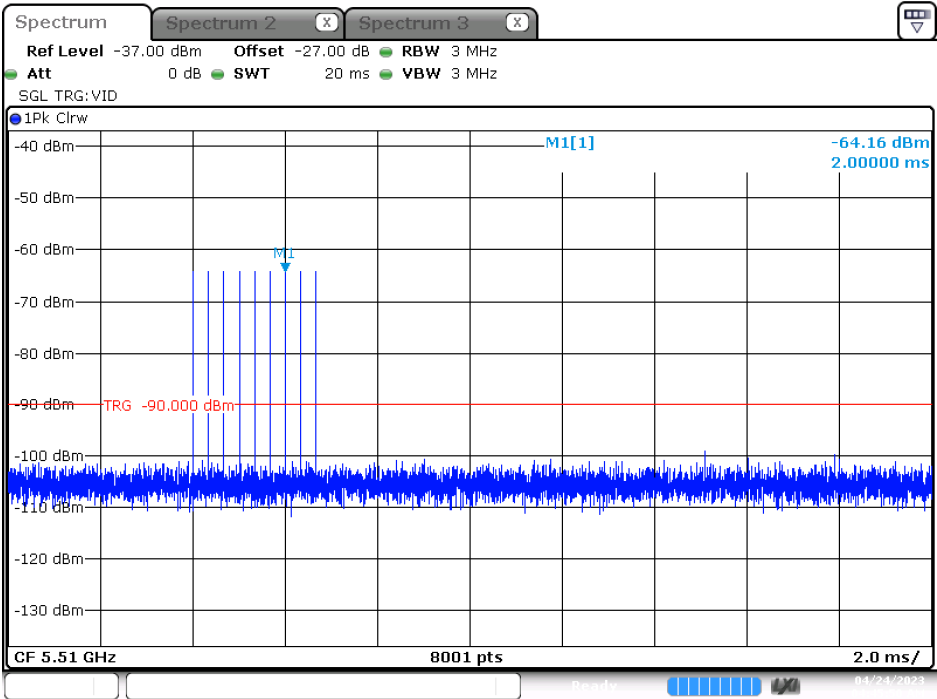


Date: 24.APR.2023 04:45:51

Calibration Plot (5530 MHz)

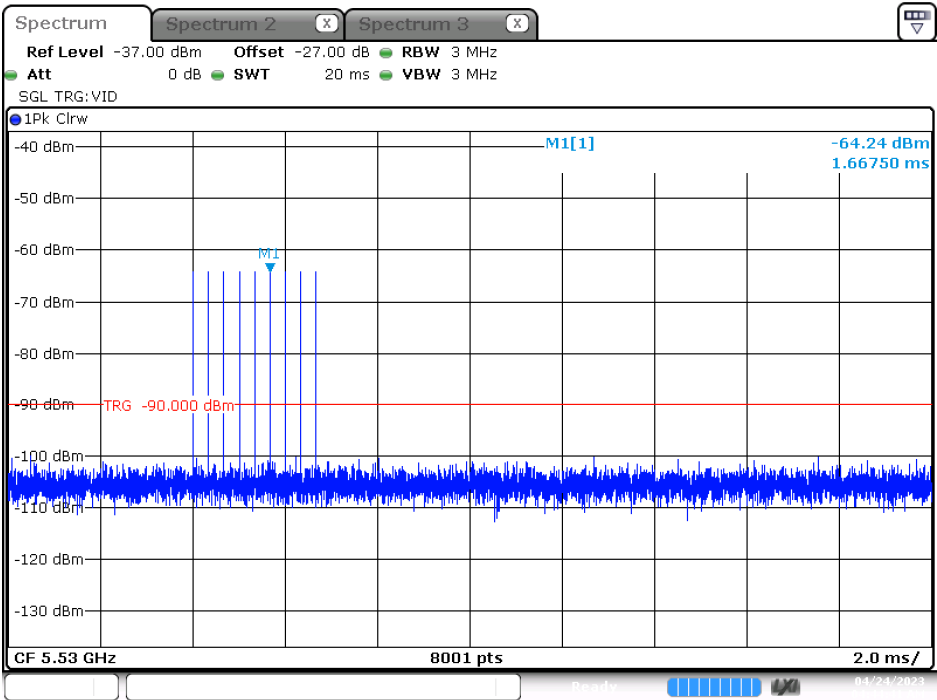

Date: 24.APR.2023 04:44:42



Calibration Plot (5570 MHz)

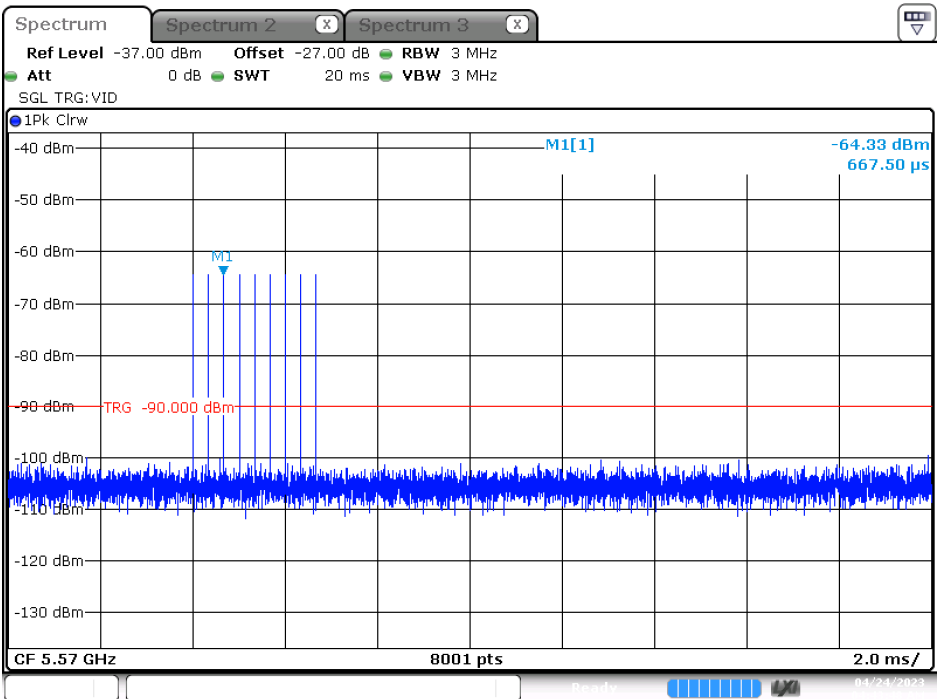

Date: 24.APR.2023 04:43:49


2.5. Master Data Traffic Plot Result

Plot of WLAN Traffic at 5500 MHz

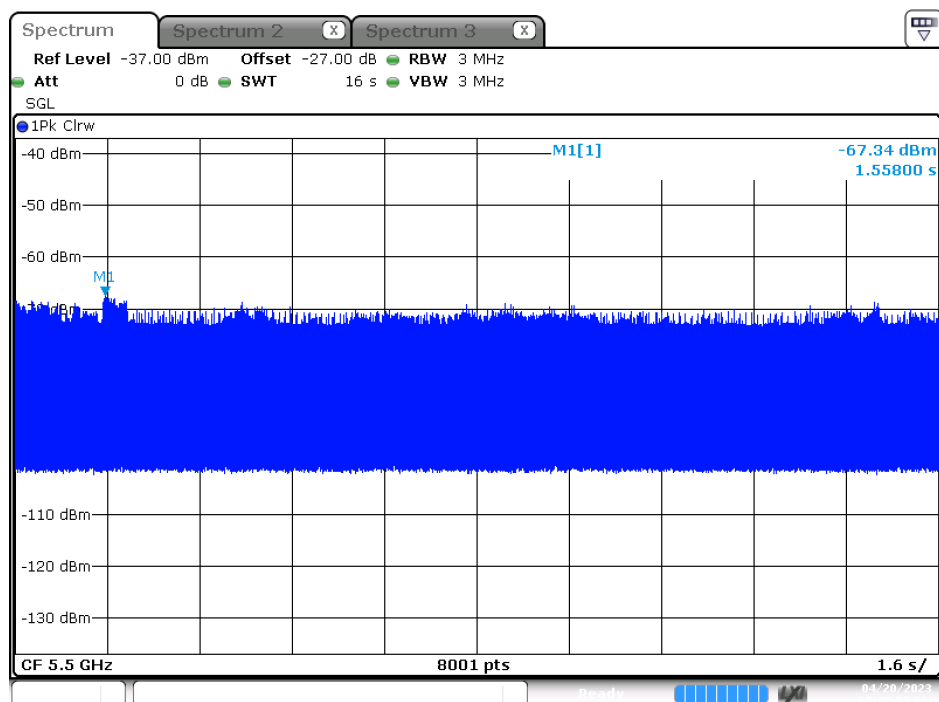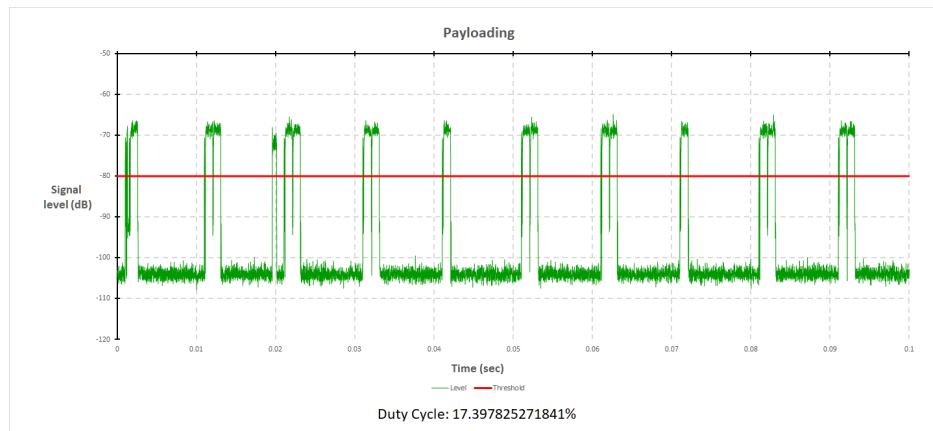

Date: 20 APR 2023 07:37:57



Channel loading	Requirement loading
17.39 %	>17%

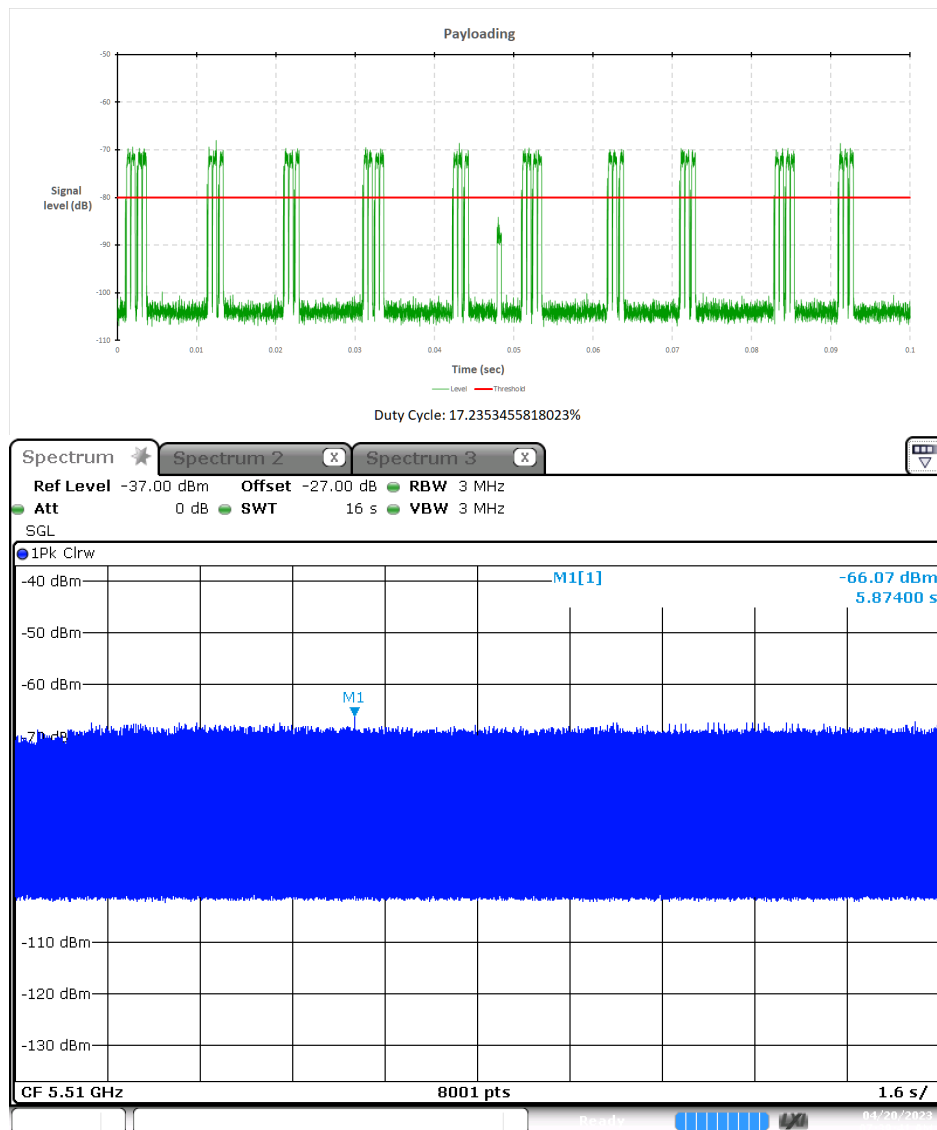Plot of WLAN Traffic at 5510 MHz

Date: 20 APR 2023 07:39:42

Channel loading	Requirement loading
17.23 %	>17%



Plot of WLAN Traffic at 5530 MHz

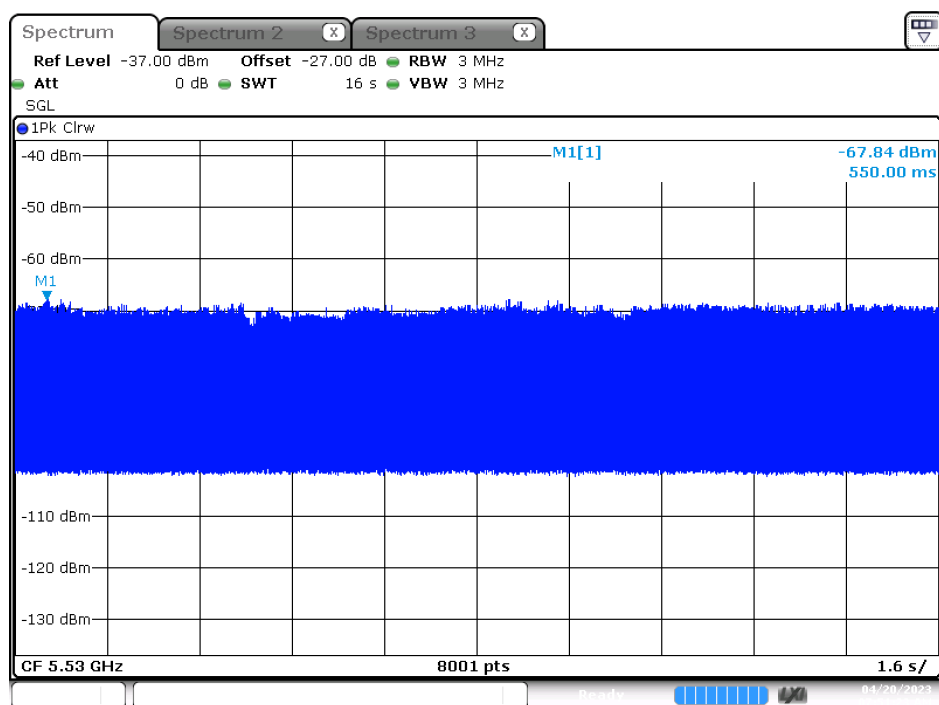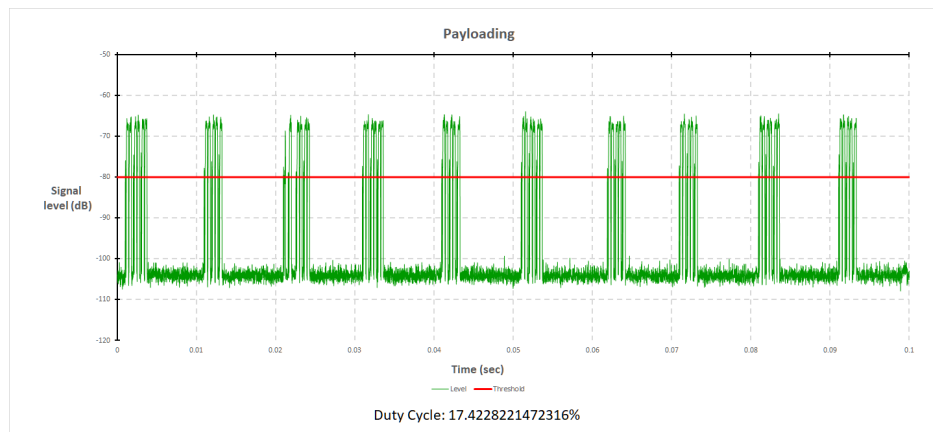

Date: 20/04/2023 07:51:23

Channel loading	Requirement loading
17.42 %	>17%

Plot of WLAN Traffic at 5570 MHz

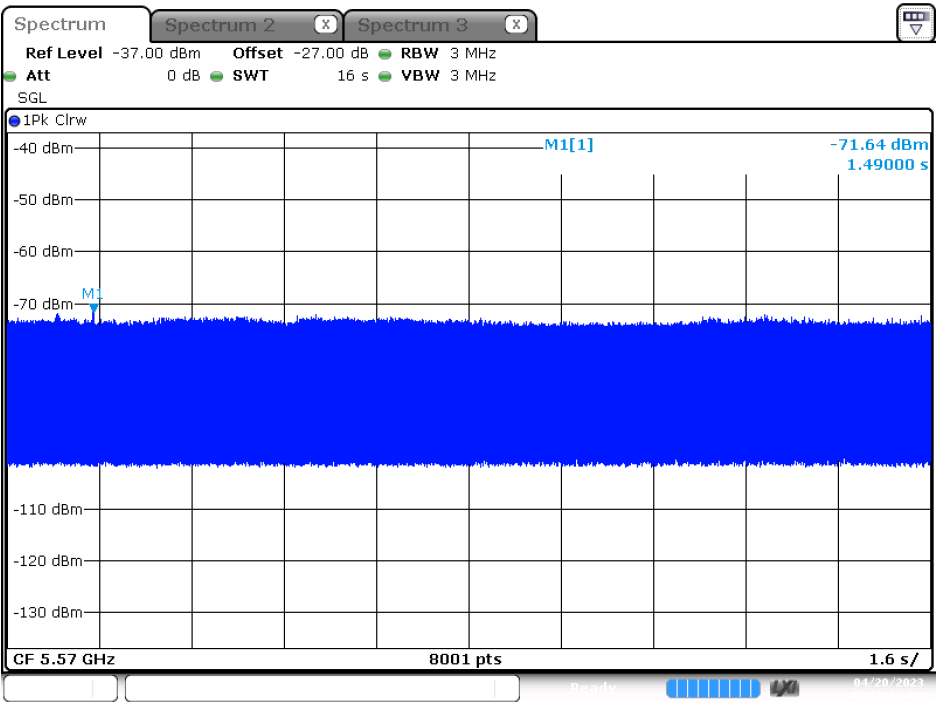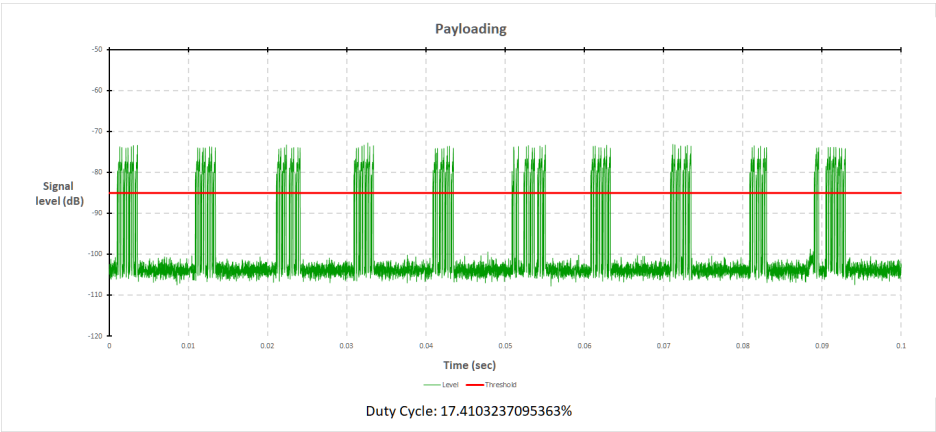

Date: 20/04/2023 07:53:23

Channel loading	Requirement loading
17.41 %	>17%

3. UNII Detection Bandwidth

3.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR15.407 requirements.

The generating equipment is configured as shown in the radiated Test Setup above. A single *Burst* of the short pulse radar type 0 is produced at 5300MHz and 5510 at a -63dBm level. The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted.

The EUT must detect the Radar Waveform 90% or more of the time. The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L .

The U-NII Detection Bandwidth is calculated as follows:


$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.

3.2. Test Requirement


All UNII 20/40MHz and 80MHz channels for this device have identical Channel bandwidths. All UNII 20/40/80MHz channels for this device also have identical Channel bandwidths. Therefore, all DFS testing was done at 5300MHz, 5500MHz, 5510MHz and 5530MHz. The 99% channel bandwidth for 20MHz signals is 17.43 MHz, and the 99% channel bandwidth for 40MHz signals is 35.96 MHz and 80MHz signals is 75.12MHz. Uncertainty

802.11ax-20 MHz

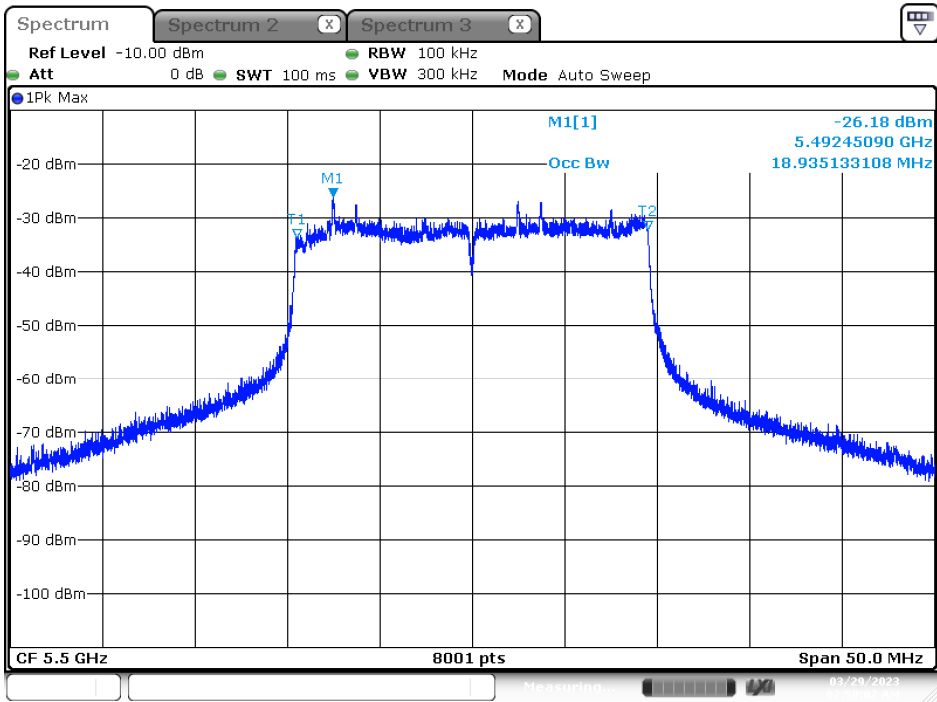


Date: 29.MAR.2023 02:50:02

802.11ax-40 MHz

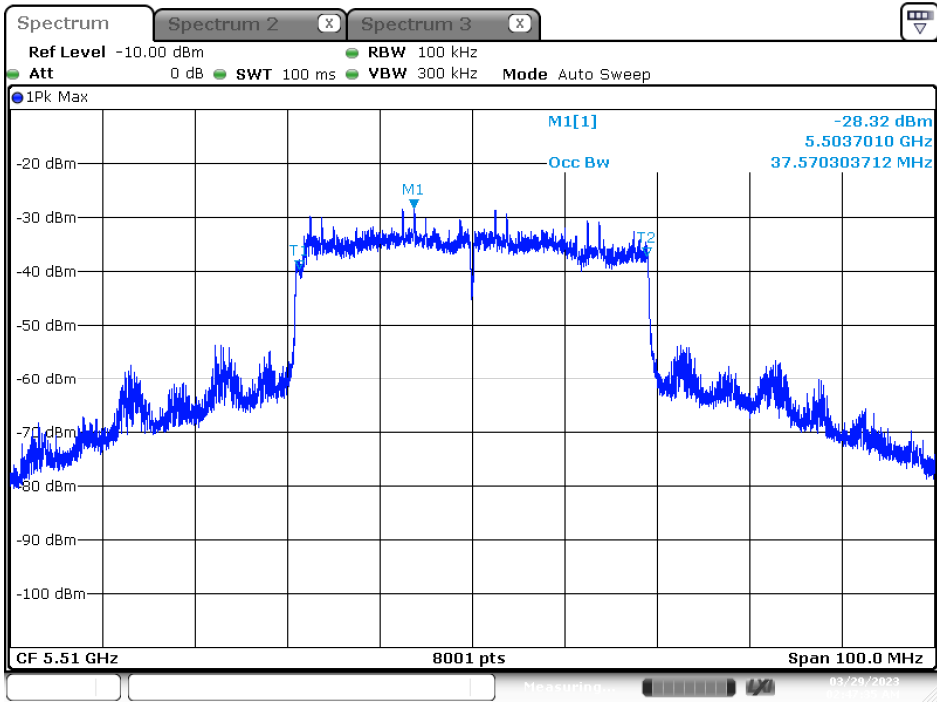


Date: 29.MAR.2023 02:47:35

802.11ax80 MHz

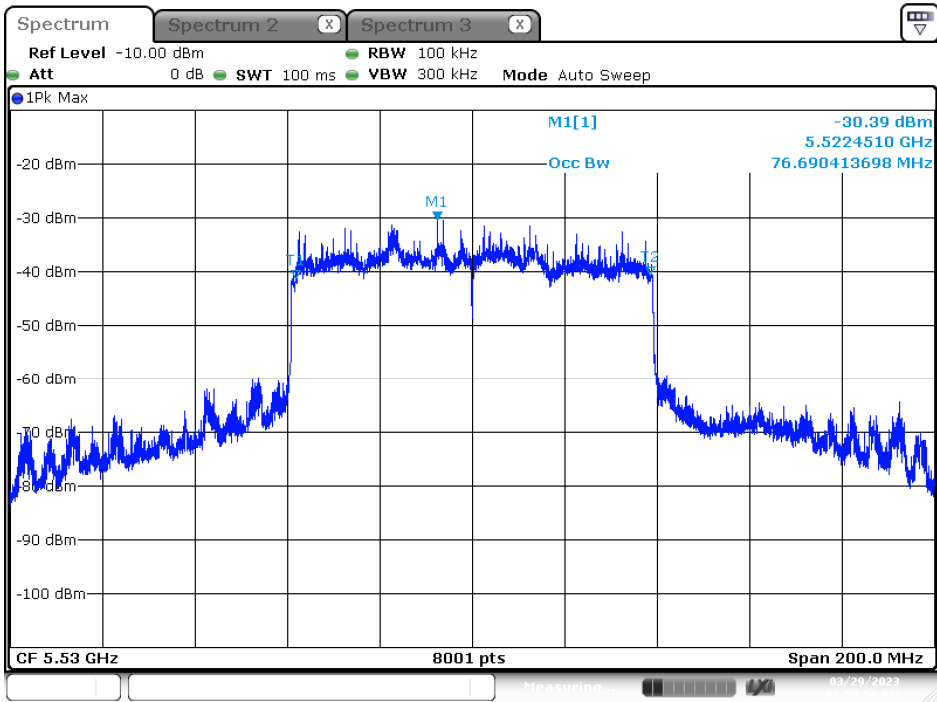

Date: 29.MAR.2023 02:55:56

802.11ax160 MHz

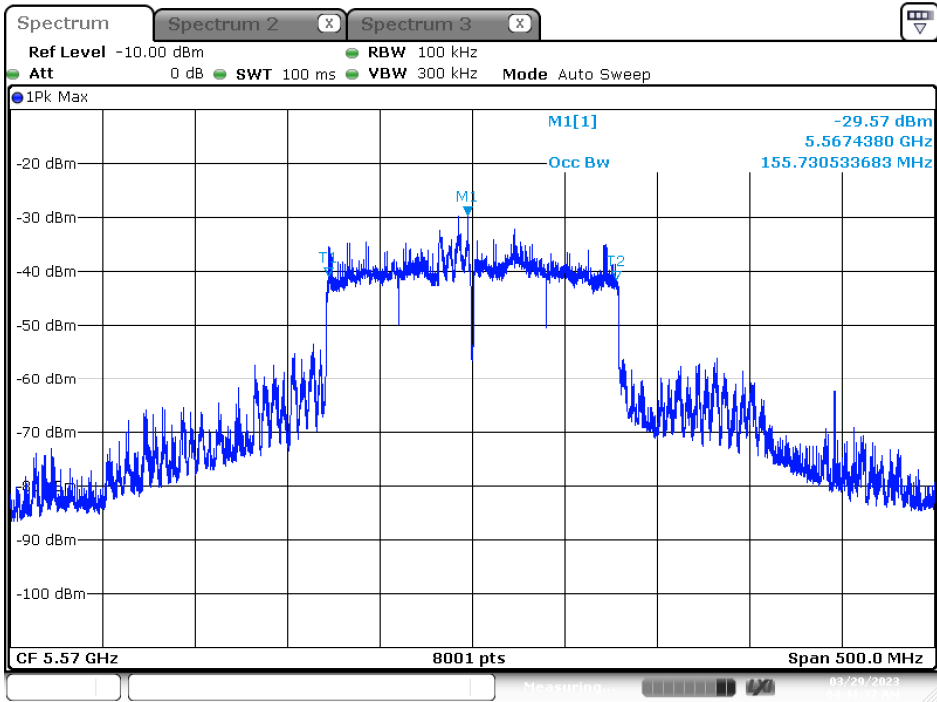

Date: 29.MAR.2023 04:41:37

3.3. Test Result of UNII Detection Bandwidth

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Transmit (802.11ax-20 MHz)
 Test Date : 2023/04/20

Test Channel: 5500 MHz											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	1	0	0	1	1	1	0	1	1	0	60.00
5491 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
Detection Bandwidth = FH - FL = 5510 MHz – 5491 MHz = 19 MHz											
EUT 99% Bandwidth = 18.9351 MHz											
UNII Detection Bandwidth Min. Limit = 18.9351 MHz X 100% = 18.9351 MHz											

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Transmit (802.11ax-40 MHz)
 Test Date : 2023/04/20

Test Channel: 5510 MHz											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	0	0	0	0	0	0	0	0	0	0.00
5491 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
5530	0	0	0	0	0	0	0	0	1	0	10.00
Detection Bandwidth = FH - FL = 5529 MHz – 5491 MHz = 38 MHz											
EUT 99% Bandwidth = 37.5703 MHz											
UNII Detection Bandwidth Min. Limit = 37.5703 MHz X 100% = 37.5703 MHz											

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Transmit (802.11ax-80 MHz)
 Test Date : 2023/04/20

Test Channel: 5530 MHz											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	0	0	0	0	0	0	0	0	0	0.00
5491	0	1	1	0	0	1	1	0	1	0	50.00
5492 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529	1	1	1	1	1	1	1	1	1	1	100.00
5530	1	1	1	1	1	1	1	1	1	1	100.00
5531	1	1	1	1	1	1	1	1	1	1	100.00
5532	1	1	1	1	1	1	1	1	1	1	100.00
5533	1	1	1	1	1	1	1	1	1	1	100.00
5534	1	1	1	1	1	1	1	1	1	1	100.00
5535	1	1	1	1	1	1	1	1	1	1	100.00
5536	1	1	1	1	1	1	1	1	1	1	100.00
5537	1	1	1	1	1	1	1	1	1	1	100.00
5538	1	1	1	1	1	1	1	1	1	1	100.00
5539	1	1	1	1	1	1	1	1	1	1	100.00
5540	1	1	1	1	1	1	1	1	1	1	100.00
5541	1	1	1	1	1	1	1	1	1	1	100.00
5542	1	1	1	1	1	1	1	1	1	1	100.00
5543	1	1	1	1	1	1	1	1	1	1	100.00
5544	1	1	1	1	1	1	1	1	1	1	100.00
5545	1	1	1	1	1	1	1	1	1	1	100.00
5546	1	1	1	1	1	1	1	1	1	1	100.00
5547	1	1	1	1	1	1	1	1	1	1	100.00
5548	1	1	1	1	1	1	1	1	1	1	100.00
5549	1	1	1	1	1	1	1	1	1	1	100.00
5550	1	1	1	1	1	1	1	1	1	1	100.00
5551	1	1	1	1	1	1	1	1	1	1	100.00
5552	1	1	1	1	1	1	1	1	1	1	100.00
5553	1	1	1	1	1	1	1	1	1	1	100.00

5554	1	1	1	1	1	1	1	1	1	1	100.00
5555	1	1	1	1	1	1	1	1	1	1	100.00
5556	1	1	1	1	1	1	1	1	1	1	100.00
5557	1	1	1	1	1	1	1	1	1	1	100.00
5558	1	1	1	1	1	1	1	1	1	1	100.00
5559	1	1	1	1	1	1	1	1	1	1	100.00
5560	1	1	1	1	1	1	1	1	1	1	100.00
5561	1	1	1	1	1	1	1	1	1	1	100.00
5562	1	1	1	1	1	1	1	1	1	1	100.00
5563	1	1	1	1	1	1	1	1	1	1	100.00
5564	1	1	1	1	1	1	1	1	1	1	100.00
5565	1	1	1	1	1	1	1	1	1	1	100.00
5566	1	1	1	1	1	1	1	1	1	1	100.00
5567	1	1	1	1	1	1	1	1	1	1	100.00
5568	1	1	1	1	1	1	1	1	1	1	100.00
5569 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
5570	0	1	1	1	0	1	1	0	0	1	60.00
Detection Bandwidth = FH - FL = 5569 MHz – 5492 MHz = 77 MHz											
EUT 99% Bandwidth = 76.6904 MHz											
UNII Detection Bandwidth Min. Limit = 76.6904 MHz X 100% = 76.6904 MHz											

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Transmit (802.11ax-160 MHz)
 Test Date : 2023/04/20

Test Channel: 5570 MHz											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	0	0	0	0	0	0	0	0	0	0.00
5491	1	1	1	0	1	1	1	0	1	1	80.00
5492 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529	1	1	1	1	1	1	1	1	1	1	100.00
5530	1	1	1	1	1	1	1	1	1	1	100.00
5531	1	1	1	1	1	1	1	1	1	1	100.00
5532	1	1	1	1	1	1	1	1	1	1	100.00
5533	1	1	1	1	1	1	1	1	1	1	100.00
5534	1	1	1	1	1	1	1	1	1	1	100.00
5535	1	1	1	1	1	1	1	1	1	1	100.00
5536	1	1	1	1	1	1	1	1	1	1	100.00
5537	1	1	1	1	1	1	1	1	1	1	100.00
5538	1	1	1	1	1	1	1	1	1	1	100.00
5539	1	1	1	1	1	1	1	1	1	1	100.00
5540	1	1	1	1	1	1	1	1	1	1	100.00
5541	1	1	1	1	1	1	1	1	1	1	100.00
5542	1	1	1	1	1	1	1	1	1	1	100.00
5543	1	1	1	1	1	1	1	1	1	1	100.00
5544	1	1	1	1	1	1	1	1	1	1	100.00
5545	1	1	1	1	1	1	1	1	1	1	100.00
5546	1	1	1	1	1	1	1	1	1	1	100.00
5547	1	1	1	1	1	1	1	1	1	1	100.00
5548	1	1	1	1	1	1	1	1	1	1	100.00
5549	1	1	1	1	1	1	1	1	1	1	100.00
5550	1	1	1	1	1	1	1	1	1	1	100.00
5551	1	1	1	1	1	1	1	1	1	1	100.00
5552	1	1	1	1	1	1	1	1	1	1	100.00
5553	1	1	1	1	1	1	1	1	1	1	100.00

5554	1	1	1	1	1	1	1	1	1	1	100.00
5555	1	1	1	1	1	1	1	1	1	1	100.00
5556	1	1	1	1	1	1	1	1	1	1	100.00
5557	1	1	1	1	1	1	1	1	1	1	100.00
5558	1	1	1	1	1	1	1	1	1	1	100.00
5559	1	1	1	1	1	1	1	1	1	1	100.00
5560	1	1	1	1	1	1	1	1	1	1	100.00
5561	1	1	1	1	1	1	1	1	1	1	100.00
5562	1	1	1	1	1	1	1	1	1	1	100.00
5563	1	1	1	1	1	1	1	1	1	1	100.00
5564	1	1	1	1	1	1	1	1	1	1	100.00
5565	1	1	1	1	1	1	1	1	1	1	100.00
5566	1	1	1	1	1	1	1	1	1	1	100.00
5567	1	1	1	1	1	1	1	1	1	1	100.00
5568	1	1	1	1	1	1	1	1	1	1	100.00
5569	1	1	1	1	1	1	1	1	1	1	100.00
5570	1	1	1	1	1	1	1	1	1	1	100.00
5571	1	1	1	1	1	1	1	1	1	1	100.00
5572	1	1	1	1	1	1	1	1	1	1	100.00
5573	1	1	1	1	1	1	1	1	1	1	100.00
5574	1	1	1	1	1	1	1	1	1	1	100.00
5575	1	1	1	1	1	1	1	1	1	1	100.00
5576	1	1	1	1	1	1	1	1	1	1	100.00
5577	1	1	1	1	1	1	1	1	1	1	100.00
5578	1	1	1	1	1	1	1	1	1	1	100.00
5579	1	1	1	1	1	1	1	1	1	1	100.00
5580	1	1	1	1	1	1	1	1	1	1	100.00
5581	1	1	1	1	1	1	1	1	1	1	100.00
5582	1	1	1	1	1	1	1	1	1	1	100.00
5583	1	1	1	1	1	1	1	1	1	1	100.00
5584	1	1	1	1	1	1	1	1	1	1	100.00
5585	1	1	1	1	1	1	1	1	1	1	100.00
5586	1	1	1	1	1	1	1	1	1	1	100.00
5587	1	1	1	1	1	1	1	1	1	1	100.00
5588	1	1	1	1	1	1	1	1	1	1	100.00
5589	1	1	1	1	1	1	1	1	1	1	100.00
5590	1	1	1	1	1	1	1	1	1	1	100.00

5591	1	1	1	1	1	1	1	1	1	1	100.00
5592	1	1	1	1	1	1	1	1	1	1	100.00
5593	1	1	1	1	1	1	1	1	1	1	100.00
5594	1	1	1	1	1	1	1	1	1	1	100.00
5595	1	1	1	1	1	1	1	1	1	1	100.00
5596	1	1	1	1	1	1	1	1	1	1	100.00
5597	1	1	1	1	1	1	1	1	1	1	100.00
5598	1	1	1	1	1	1	1	1	1	1	100.00
5599	1	1	1	1	1	1	1	1	1	1	100.00
5600	1	1	1	1	1	1	1	1	1	1	100.00
5601	1	1	1	1	1	1	1	1	1	1	100.00
5602	1	1	1	1	1	1	1	1	1	1	100.00
5603	1	1	1	1	1	1	1	1	1	1	100.00
5604	1	1	1	1	1	1	1	1	1	1	100.00
5605	1	1	1	1	1	1	1	1	1	1	100.00
5606	1	1	1	1	1	1	1	1	1	1	100.00
5607	1	1	1	1	1	1	1	1	1	1	100.00
5608	1	1	1	1	1	1	1	1	1	1	100.00
5609	1	1	1	1	1	1	1	1	1	1	100.00
5610	1	1	1	1	1	1	1	1	1	1	100.00
5611	1	1	1	1	1	1	1	1	1	1	100.00
5612	1	1	1	1	1	1	1	1	1	1	100.00
5613	1	1	1	1	1	1	1	1	1	1	100.00
5614	1	1	1	1	1	1	1	1	1	1	100.00
5615	1	1	1	1	1	1	1	1	1	1	100.00
5616	1	1	1	1	1	1	1	1	1	1	100.00
5617	1	1	1	1	1	1	1	1	1	1	100.00
5618	1	1	1	1	1	1	1	1	1	1	100.00
5619	1	1	1	1	1	1	1	1	1	1	100.00
5620	1	1	1	1	1	1	1	1	1	1	100.00
5621	1	1	1	1	1	1	1	1	1	1	100.00
5622	1	1	1	1	1	1	1	1	1	1	100.00
5623	1	1	1	1	1	1	1	1	1	1	100.00
5624	1	1	1	1	1	1	1	1	1	1	100.00
5625	1	1	1	1	1	1	1	1	1	1	100.00
5626	1	1	1	1	1	1	1	1	1	1	100.00
5627	1	1	1	1	1	1	1	1	1	1	100.00

5628	1	1	1	1	1	1	1	1	1	1	100.00
5629	1	1	1	1	1	1	1	1	1	1	100.00
5630	1	1	1	1	1	1	1	1	1	1	100.00
5631	1	1	1	1	1	1	1	1	1	1	100.00
5632	1	1	1	1	1	1	1	1	1	1	100.00
5633	1	1	1	1	1	1	1	1	1	1	100.00
5634	1	1	1	1	1	1	1	1	1	1	100.00
5635	1	1	1	1	1	1	1	1	1	1	100.00
5636	1	1	1	1	1	1	1	1	1	1	100.00
5637	1	1	1	1	1	1	1	1	1	1	100.00
5638	1	1	1	1	1	1	1	1	1	1	100.00
5639	1	1	1	1	1	1	1	1	1	1	100.00
5640	1	1	1	1	1	1	1	1	1	1	100.00
5641	1	1	1	1	1	1	1	1	1	1	100.00
5642	1	1	1	1	1	1	1	1	1	1	100.00
5643	1	1	1	1	1	1	1	1	1	1	100.00
5644	1	1	1	1	1	1	1	1	1	1	100.00
5645	1	1	1	1	1	1	1	1	1	1	100.00
5646	1	1	1	1	1	1	1	1	1	1	100.00
5647	1	1	1	1	1	1	1	1	1	1	100.00
5648	1	1	1	1	1	1	1	1	1	1	100.00
5649 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
5650	0	1	1	1	0	1	1	1	1	1	80.00
Detection Bandwidth = FH - FL = 5649 MHz – 5492 MHz = 157 MHz											
EUT 99% Bandwidth = 155.7305 MHz											
UNII Detection Bandwidth Min. Limit = 155.7305 MHz X 100% = 155.7305 MHz											

4. Initial Channel Availability Check Time

4.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The U-NII device is powered on and instructed to operate at 5530MHz. At the same time the UUT is powered on, the spectrum analyzer is set to zero span mode with a 3 MHz resolution bandwidth at 5530MHz with a 2.5minute sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

The initial power up time of the EUT is indicated by marker1 in the plot, Initial beacons/data transmissions are indicated by marker 1R.


4.2. Test Requirement

The EUT shall perform a channel availability check to ensure that there is no radar operation on the channel, after power-up sequence, receiver at least 1 minute on the intended operation frequency.

4.3. Test Result of Initial Channel Availability Check Time

Product	:	WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
Test Item	:	Initial Channel Availability Check Time
Radar Type	:	Type 0
Test Mode	:	Transmit (802.11ax-160 MHz)

The EUT does not transmit any beacon or data transmission until at least 1 minute after the completion of the power-on cycle (129.27sec). The initial power up time of the EUT is indicated by Marker 1 (189.27 sec) – CAC (60 sec). Initial beacons/data transmission is indicated by Marker 1 (189.27 sec)

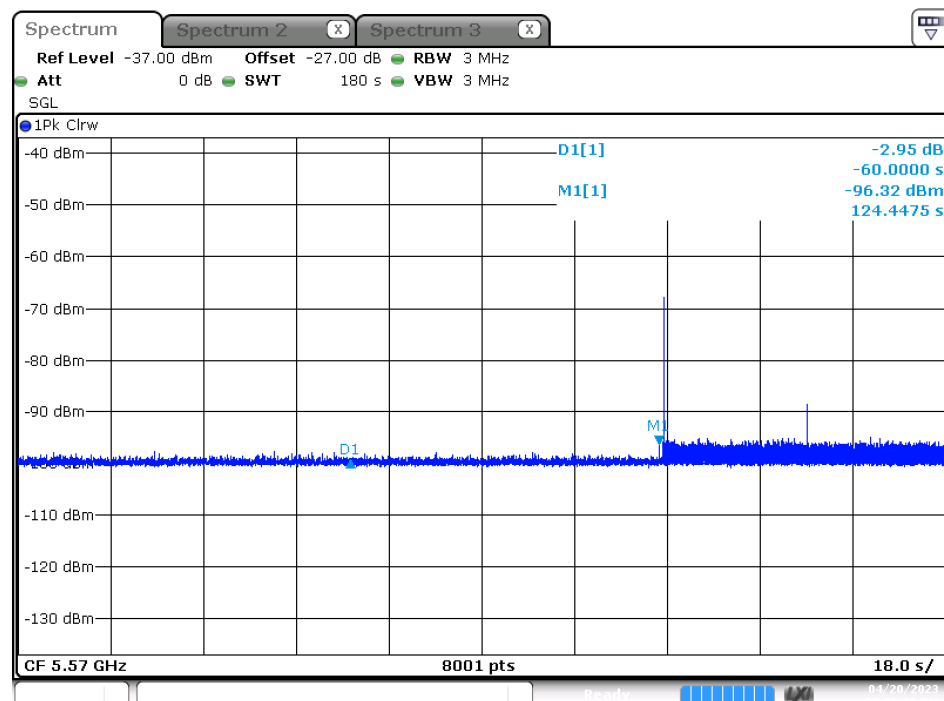

Date: 20.APR.2023 03:06:26

5. Radar Burst at the Beginning of the Channel Availability Check Time

5.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the beginning of the Channel Availability Check Time.

The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds.

A single Burst of short pulse of radar type 1 at -63dBm will commence within a 6 second window starting at T1.


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst, Verify that during the 2.5 minute measurement window no EUT transmissions occurred at 5530MHz.

5.2. Test Requirement

In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

5.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Radar Burst at the Beginning of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Transmit (802.11ax-160 MHz)

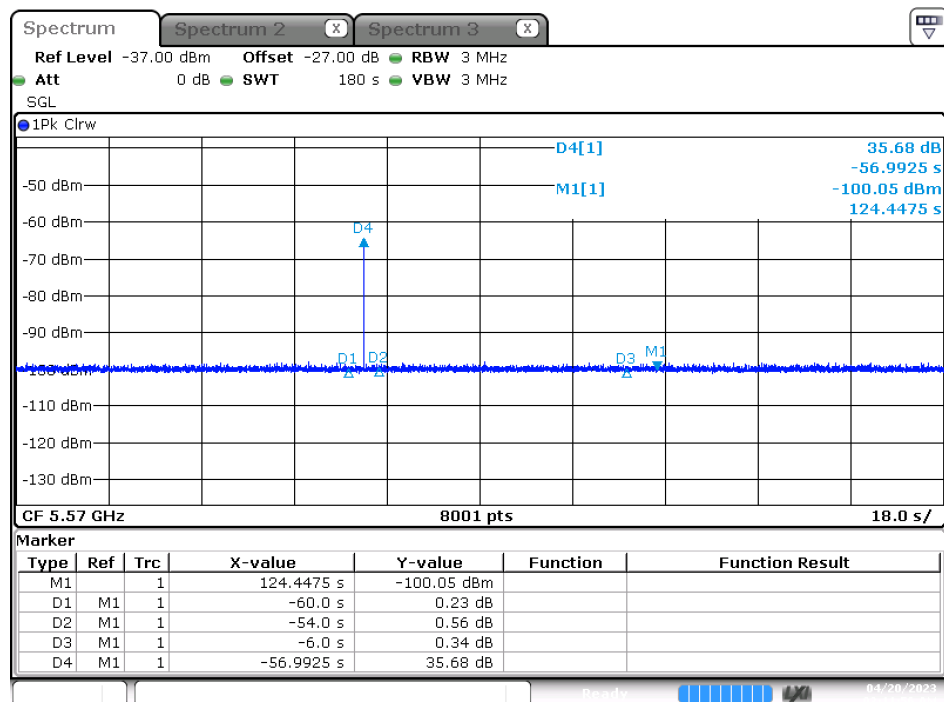

Date: 20.APR.2023 03:11:56

6. Radar Burst at the End of the Channel Availability Check Time

6.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the end of the Channel Availability Check Time.

The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of short pulse of radar type 1 at -61 dBm will commence within a 6 second window starting at T1+ 54 seconds.

Visual indication on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst has been generated.


Verify that during the 2.5 minute measurement window no UUT transmissions occurred at 5530Hz.

6.2. Test Requirement

In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

6.3. Test Result of Radar Burst at the End of the Channel Availability Check Time

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Radar Burst at the End of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Transmit (802.11ax-160 MHz)

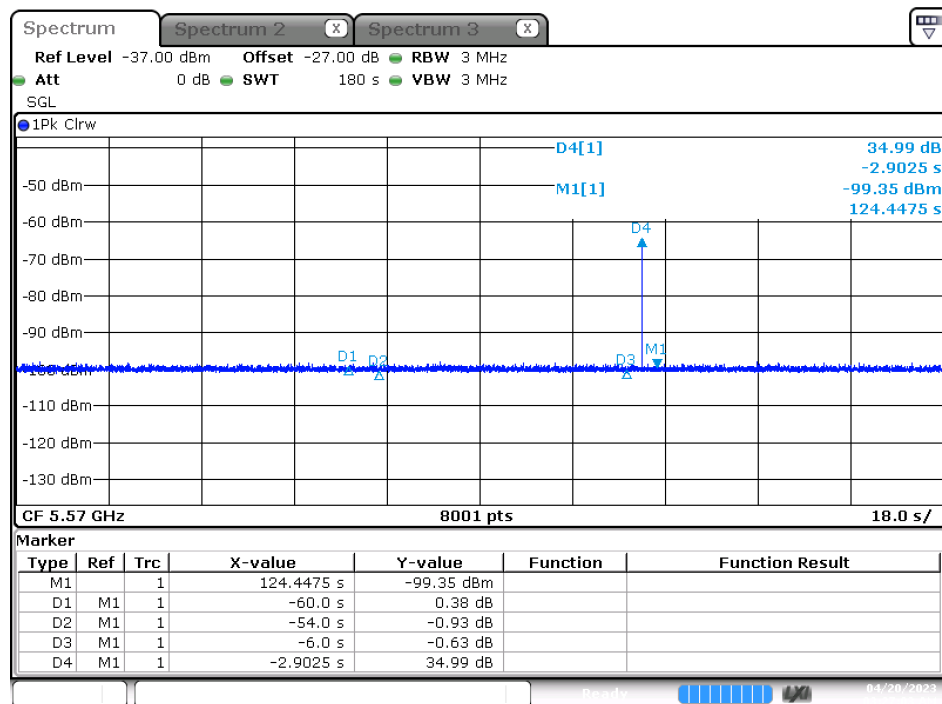

7. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

7.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

These tests define how the following DFS parameters are verified during In-Service Monitoring;

Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.. The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5530MHz..

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -61dBm.

Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing

Transmission Time results to the limits defined in the DFS Response requirement values table.

Measure the UUT for more than 30 minutes following the channel close/move time to verify that the UUT does not resume any transmissions on this Channel.


7.2. Test Requirement

Parameter	Value
Channel Move Time	10 Seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period
Non-Occupancy Period	Minimum 30 minutes

7.3. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Channel Move Time and Channel Closing Transmission Time
 Radar Type : Type 0
 Test Mode : Transmit (802.11ax-160 MHz)

Channel Closing Transmission Time and Channel Move Time for Radar Test Type 0 at 5570 MHz

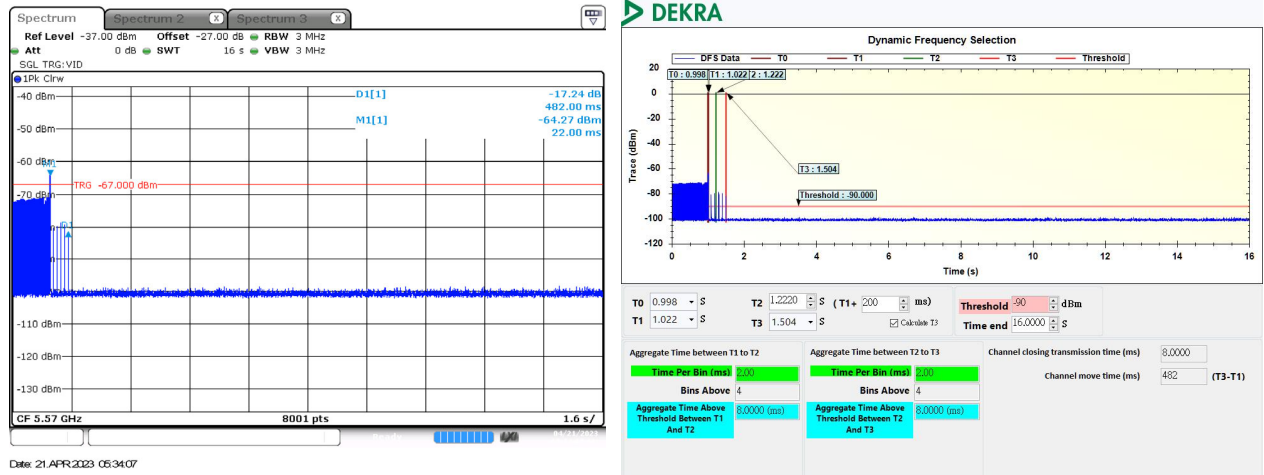


Note:

1. The results showed that after radar signal injected the channel transmission closing time less than 200 milliseconds and an aggregate of no more than 60 milliseconds.
2. The results showed that after radar signal injected the channel move time was less than 10 seconds.

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Non-Occupancy Period
 Radar Type : Type 0
 Test Mode : Transmit (802.11ax-160 MHz)

Non-Occupancy Period at 5570 MHz

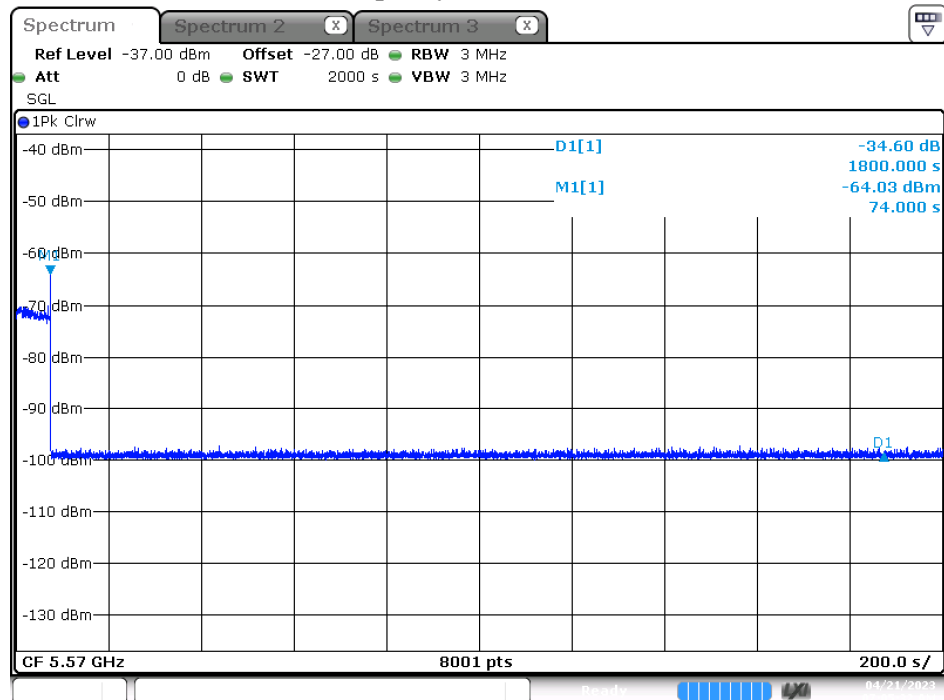

Date: 21.APR.2023 07:05:33

Test Item	Test Result (Minutes)	Limit (Minutes)
Non-Occupancy Period	>30	>30

*No EUT transmissions were observed on the test channel during 30 minutes observation time.

8. Statistical Performance Check

8.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the

Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5500MHz, 5510MHz and 5530MHz.

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6 at

-62dbm. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.

8.2. Test Requirement

The minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Minimum percentage of successful detections

Radar Type	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	60%	30
2	60%	30
3	60%	30
4	60%	30
Aggregate (Radar Types 1-4)	80%	120
5	80%	30
6	70%	30

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Probability of Detection Radar Waveform}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$

8.3. Test Result of Statistical Performance Check

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Transmit (802.11ax-20 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	98	1	538	1
2	5500	81	1	658	1
3	5500	95	1	558	1
4	5500	61	1	878	1
5	5500	67	1	798	1
6	5500	76	1	698	1
7	5500	57	1	938	1
8	5500	78	1	678	1
9	5500	92	1	578	1
10	5500	74	1	718	0
11	5500	72	1	738	1
12	5500	62	1	858	1
13	5500	68	1	778	1
14	5500	63	1	838	0
15	5500	59	1	898	1
16	5500	21	1	2522	1
17	5500	29	1	1871	1
18	5500	26	1	2093	1
19	5500	32	1	1698	1
20	5500	19	1	2913	1
21	5500	18	1	2977	1
22	5500	25	1	2127	1
23	5500	36	1	1481	0
24	5500	35	1	1531	1
25	5500	33	1	1628	1
26	5500	22	1	2443	0
27	5500	18	1	2929	1
28	5500	26	1	2077	1
29	5500	25	1	2113	1
30	5500	23	1	2349	1
Detection Percentage (%)					86.67%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Transmit (802.11ax-20 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	27	4.1	184	1
2	5500	27	2.5	184	1
3	5500	23	1.9	188	1
4	5500	26	1.1	219	1
5	5500	26	3.9	184	1
6	5500	27	3.6	195	1
7	5500	27	4.3	152	1
8	5500	28	3	192	1
9	5500	27	4	189	0
10	5500	28	2.9	158	1
11	5500	27	1.6	151	1
12	5500	24	4.3	224	1
13	5500	27	3.7	160	1
14	5500	24	2.8	186	1
15	5500	24	1.4	210	1
16	5500	26	3.8	202	1
17	5500	28	3.8	225	1
18	5500	28	2.1	220	1
19	5500	25	3.1	220	1
20	5500	27	1.2	205	1
21	5500	29	4.3	195	1
22	5500	28	3.2	168	1
23	5500	24	2.2	190	1
24	5500	24	2.3	213	1
25	5500	25	2.2	218	0
26	5500	25	3.3	214	1
27	5500	24	1.2	184	1
28	5500	29	4.1	183	1
29	5500	25	1.3	150	1
30	5500	25	2	194	1
Detection Percentage (%)					93.33 %

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Transmit (802.11ax-20 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	18	6.4	320	1
2	5500	16	9	339	1
3	5500	18	8	255	1
4	5500	18	8	227	0
5	5500	17	7.6	448	1
6	5500	17	7.5	441	1
7	5500	16	6.2	211	1
8	5500	16	7.7	351	1
9	5500	17	6.4	321	1
10	5500	17	6.2	337	0
11	5500	16	6	353	1
12	5500	16	7.1	341	1
13	5500	18	7.8	471	1
14	5500	17	6	360	1
15	5500	17	6.6	358	1
16	5500	16	7.3	333	1
17	5500	17	8.8	258	0
18	5500	16	7.6	247	1
19	5500	17	8.1	433	1
20	5500	16	7.5	302	1
21	5500	17	8.7	434	1
22	5500	17	8.8	257	0
23	5500	17	6.1	448	1
24	5500	17	6.6	402	1
25	5500	16	6.1	448	1
26	5500	18	9.5	467	1
27	5500	17	7.2	400	1
28	5500	18	9.8	417	1
29	5500	16	9.1	218	1
30	5500	17	9.9	406	1
Detection Percentage (%)					86.67%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Transmit (802.11ax-20 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	13	18.9	357	0
2	5500	14	18.5	480	1
3	5500	13	19.2	319	1
4	5500	16	16.1	326	1
5	5500	14	12.3	347	0
6	5500	16	13.8	308	1
7	5500	15	17.1	494	1
8	5500	12	12.3	323	1
9	5500	15	13.3	308	1
10	5500	16	16.6	399	0
11	5500	16	18.3	325	1
12	5500	13	19.4	465	1
13	5500	15	18.3	401	1
14	5500	15	17.7	219	1
15	5500	15	14.7	239	1
16	5500	16	14.4	300	0
17	5500	15	18.5	350	1
18	5500	15	17.3	273	1
19	5500	14	12.4	256	1
20	5500	13	15.5	454	1
21	5500	15	17.9	359	1
22	5500	12	15	345	1
23	5500	14	15.1	485	1
24	5500	15	17.4	360	0
25	5500	13	13.8	466	1
26	5500	13	14.4	411	1
27	5500	12	18.5	223	0
28	5500	15	17.9	433	1
29	5500	14	11.7	351	1
30	5500	13	15.3	216	1
Detection Percentage (%)					80.00%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Transmit (802.11ax-40 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	37	1	1450	1
2	5510	36	1	1492	1
3	5510	39	1	1381	1
4	5510	27	1	2009	1
5	5510	23	1	2384	1
6	5510	22	1	2461	1
7	5510	34	1	1550	1
8	5510	19	1	2781	0
9	5510	27	1	2017	1
10	5510	21	1	2560	1
11	5510	22	1	2467	1
12	5510	21	1	2579	1
13	5510	49	1	1088	1
14	5510	19	1	2822	1
15	5510	42	1	1274	1
16	5510	25	1	2163	1
17	5510	18	1	2945	0
18	5510	32	1	1657	1
19	5510	23	1	2341	1
20	5510	26	1	2028	1
21	5510	22	1	2404	0
22	5510	21	1	2563	1
23	5510	25	1	2172	1
24	5510	19	1	2881	1
25	5510	41	1	1300	1
26	5510	27	1	1973	1
27	5510	19	1	2888	1
28	5510	79	1	671	1
29	5510	22	1	2424	1
30	5510	19	1	2807	1
Detection Percentage (%)					90.00%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Transmit (802.11ax-40 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	24	2.3	217	0
2	5510	23	4.9	179	1
3	5510	28	3.3	193	1
4	5510	24	4.8	160	1
5	5510	26	1.6	221	1
6	5510	24	1.1	163	1
7	5510	25	3.1	193	1
8	5510	29	2.5	213	1
9	5510	26	1.4	150	1
10	5510	26	1.7	193	1
11	5510	24	4.7	207	1
12	5510	26	4.8	191	1
13	5510	28	2	195	1
14	5510	27	3.4	201	1
15	5510	26	2.6	207	1
16	5510	27	1.3	194	1
17	5510	24	3.5	184	0
18	5510	27	2.1	171	1
19	5510	23	2.2	159	1
20	5510	25	3.9	191	1
21	5510	24	1.9	195	1
22	5510	26	1.9	218	1
23	5510	24	1.6	210	1
24	5510	29	4.5	223	1
25	5510	28	1.4	174	1
26	5510	27	4.5	169	1
27	5510	25	4.4	174	1
28	5510	25	1.4	222	0
29	5510	28	4.6	183	1
30	5510	27	2.5	215	1
Detection Percentage (%)					90.00%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Transmit (802.11ax-40 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	18	6.5	252	1
2	5510	17	9.9	437	0
3	5510	16	9	326	1
4	5510	17	6.4	268	0
5	5510	17	8.7	348	1
6	5510	16	6.7	404	1
7	5510	18	8.9	433	1
8	5510	18	7.4	424	1
9	5510	17	8.8	377	1
10	5510	16	6.1	290	0
11	5510	17	8.5	345	1
12	5510	17	8.6	247	0
13	5510	17	8.3	413	1
14	5510	18	8.6	311	0
15	5510	17	8.7	234	1
16	5510	17	6.6	304	1
17	5510	17	7.6	465	0
18	5510	17	8.7	342	1
19	5510	16	6.9	248	0
20	5510	18	8.4	398	1
21	5510	17	6.3	226	1
22	5510	16	9.1	484	1
23	5510	17	9.7	484	1
24	5510	17	6.8	404	1
25	5510	18	8.1	433	1
26	5510	17	7	344	1
27	5510	17	7.9	475	1
28	5510	16	6.4	393	1
29	5510	17	6.3	245	0
30	5510	16	6.3	404	1
Detection Percentage (%)					73.33%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Transmit (802.11ax-40 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	13	16.6	324	1
2	5510	14	12.4	396	1
3	5510	13	12.9	440	1
4	5510	15	15	396	1
5	5510	14	11.3	357	0
6	5510	15	19.9	410	1
7	5510	12	19.1	489	1
8	5510	16	12	352	1
9	5510	12	17.7	449	0
10	5510	16	16.4	495	0
11	5510	15	18.8	273	0
12	5510	14	12.3	428	1
13	5510	13	18.4	482	0
14	5510	12	14	350	0
15	5510	14	14.8	273	1
16	5510	12	13.5	306	1
17	5510	15	17.8	438	1
18	5510	14	11.1	417	1
19	5510	14	14.7	327	0
20	5510	14	12.7	212	1
21	5510	16	17.6	246	1
22	5510	13	11.7	380	1
23	5510	13	15	358	1
24	5510	12	16.4	385	1
25	5510	13	11.4	373	1
26	5510	13	14.6	209	0
27	5510	14	14.3	390	1
28	5510	16	16.5	447	1
29	5510	16	16.2	358	1
30	5510	14	14.4	394	0
Detection Percentage (%)					70.00%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Transmit (802.11ax-80 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	100	1	530	1
2	5530	26	1	2092	1
3	5530	27	1	1993	1
4	5530	19	1	2842	1
5	5530	34	1	1580	1
6	5530	48	1	1114	1
7	5530	22	1	2497	1
8	5530	51	1	1046	1
9	5530	18	1	3021	0
10	5530	25	1	2154	1
11	5530	55	1	975	1
12	5530	22	1	2465	1
13	5530	21	1	2569	0
14	5530	22	1	2407	1
15	5530	36	1	1494	1
16	5530	41	1	1314	1
17	5530	30	1	1792	1
18	5530	52	1	1030	1
19	5530	33	1	1610	1
20	5530	32	1	1653	1
21	5530	20	1	2768	1
22	5530	29	1	1836	1
23	5530	88	1	602	1
24	5530	23	1	2363	1
25	5530	21	1	2511	0
26	5530	52	1	1029	1
27	5530	61	1	873	0
28	5530	34	1	1559	1
29	5530	50	1	1055	1
30	5530	41	1	1294	1
Detection Percentage (%)					86.67%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Transmit (802.11ax-80 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	24	1.1	185	1
2	5530	23	2.9	198	1
3	5530	28	1.7	185	1
4	5530	24	1	229	0
5	5530	24	2.4	150	1
6	5530	25	3.3	195	1
7	5530	28	1	181	1
8	5530	24	4.2	179	1
9	5530	25	4.4	222	1
10	5530	26	3.1	150	1
11	5530	25	3.1	158	1
12	5530	25	1.9	202	1
13	5530	25	2.5	198	1
14	5530	25	3.2	195	1
15	5530	26	2.4	205	1
16	5530	28	2.6	155	1
17	5530	26	1.1	225	1
18	5530	25	1.3	225	1
19	5530	28	1.5	172	1
20	5530	26	4	197	1
21	5530	27	4.8	226	1
22	5530	24	3.1	166	1
23	5530	24	1.2	166	1
24	5530	27	1.8	159	0
25	5530	24	3.9	217	1
26	5530	24	3.3	229	1
27	5530	25	2.8	222	1
28	5530	28	1.1	229	1
29	5530	26	2	197	1
30	5530	24	1.9	174	1
Detection Percentage (%)					93.33%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Transmit (802.11ax-80 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	17	6.8	418	1
2	5530	16	9	206	1
3	5530	18	9	382	1
4	5530	16	6.5	309	0
5	5530	16	6.2	309	0
6	5530	17	6.5	310	1
7	5530	17	8.4	276	1
8	5530	16	8.9	387	1
9	5530	17	6.2	398	0
10	5530	17	9.6	396	1
11	5530	17	6	432	1
12	5530	17	6.1	307	0
13	5530	17	9.4	242	1
14	5530	17	9.4	255	0
15	5530	17	9.5	363	1
16	5530	17	6.8	344	1
17	5530	17	6.3	291	1
18	5530	16	8.9	378	1
19	5530	16	6	431	1
20	5530	17	7.3	429	0
21	5530	18	8.5	289	1
22	5530	17	9.1	235	0
23	5530	16	7.5	213	1
24	5530	17	6.9	270	1
25	5530	16	9.4	248	0
26	5530	16	9.9	236	1
27	5530	17	9.6	293	1
28	5530	17	9.5	331	1
29	5530	17	8.4	350	1
30	5530	16	6.2	289	1
Detection Percentage (%)					73.33%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Transmit (802.11ax-80 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	13	17.6	287	1
2	5530	14	18.3	275	1
3	5530	13	15.3	277	0
4	5530	15	11.3	391	1
5	5530	12	11.4	293	0
6	5530	12	18.3	302	0
7	5530	16	16.4	468	1
8	5530	13	15.7	465	0
9	5530	14	14.4	391	0
10	5530	15	11.8	245	1
11	5530	13	13.1	264	0
12	5530	15	18.2	277	1
13	5530	15	19.6	245	1
14	5530	16	14.6	327	0
15	5530	15	12.9	419	1
16	5530	15	17.2	498	1
17	5530	15	13.2	322	1
18	5530	16	18.2	320	1
19	5530	16	15.6	430	1
20	5530	14	14.6	406	1
21	5530	14	17	272	1
22	5530	14	11.6	458	1
23	5530	12	19.9	471	1
24	5530	14	12.8	354	0
25	5530	15	14	318	1
26	5530	15	11.4	444	1
27	5530	15	12.8	222	0
28	5530	15	15.6	344	1
29	5530	12	14	364	1
30	5530	13	15.4	306	1
Detection Percentage (%)					70.00%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Transmit (802.11ax-160 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5570	34	1	1567	1
2	5570	27	1	2006	1
3	5570	93	1	569	1
4	5570	18	1	2974	0
5	5570	43	1	1229	1
6	5570	77	1	689	1
7	5570	85	1	620	1
8	5570	69	1	765	1
9	5570	26	1	2048	1
10	5570	28	1	1909	1
11	5570	51	1	1049	1
12	5570	18	1	3050	1
13	5570	67	1	788	1
14	5570	66	1	801	1
15	5570	26	1	2069	1
16	5570	18	1	2942	0
17	5570	21	1	2554	1
18	5570	19	1	2882	1
19	5570	27	1	2016	1
20	5570	32	1	1675	1
21	5570	100	1	528	1
22	5570	37	1	1433	1
23	5570	49	1	1080	1
24	5570	73	1	725	1
25	5570	18	1	2936	1
26	5570	25	1	2158	1
27	5570	26	1	2054	1
28	5570	28	1	1897	1
29	5570	20	1	2697	0
30	5570	36	1	1467	1
Detection Percentage (%)					90.00%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Transmit (802.11ax-160 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5570	27	2.7	170	0
2	5570	25	2.4	163	1
3	5570	25	2.2	213	1
4	5570	28	1	215	1
5	5570	26	2.3	196	1
6	5570	26	2.8	226	1
7	5570	26	1.6	213	1
8	5570	29	4.4	167	1
9	5570	26	4.2	197	1
10	5570	29	4.6	166	1
11	5570	26	4.6	167	1
12	5570	26	2.9	161	1
13	5570	25	1.5	180	1
14	5570	28	3.4	214	1
15	5570	24	2	154	1
16	5570	28	4.1	188	1
17	5570	26	1.2	158	0
18	5570	23	4.9	200	1
19	5570	26	3.3	152	1
20	5570	27	3.5	166	1
21	5570	28	1.1	179	1
22	5570	23	1.9	166	1
23	5570	25	3.8	215	1
24	5570	25	1.7	189	1
25	5570	27	1.7	214	1
26	5570	26	4.1	219	0
27	5570	26	4.9	217	1
28	5570	27	4.9	168	1
29	5570	25	1.8	150	1
30	5570	25	2.5	150	1
Detection Percentage (%)					90.00%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Transmit (802.11ax-160 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5570	18	7.9	452	0
2	5570	16	7.2	348	1
3	5570	16	9.9	249	1
4	5570	16	6	217	1
5	5570	16	7.3	364	1
6	5570	17	9.6	314	1
7	5570	16	7.2	334	1
8	5570	17	9.9	483	1
9	5570	17	7.4	338	1
10	5570	18	8.8	437	1
11	5570	16	8.1	380	1
12	5570	18	9.2	261	1
13	5570	18	9.9	228	1
14	5570	16	6.8	248	1
15	5570	18	6.2	308	1
16	5570	17	8.9	472	0
17	5570	17	7.8	324	1
18	5570	17	6.2	404	0
19	5570	16	9.9	440	1
20	5570	17	8.1	240	0
21	5570	18	7.8	326	1
22	5570	17	7	250	1
23	5570	17	6.9	491	1
24	5570	17	8.9	424	1
25	5570	18	8.7	345	0
26	5570	18	7.3	425	0
27	5570	16	7.1	432	1
28	5570	18	9.9	354	1
29	5570	16	7.1	346	1
30	5570	17	7.8	336	1
Detection Percentage (%)					80.00%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Transmit (802.11ax-160 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5570	13	11.2	208	1
2	5570	14	15.8	483	1
3	5570	15	15.1	450	0
4	5570	13	18.7	224	1
5	5570	15	16.6	352	1
6	5570	16	12.2	251	0
7	5570	15	19.1	472	1
8	5570	12	16.5	234	1
9	5570	15	16.6	227	1
10	5570	15	13.7	337	0
11	5570	15	11.4	368	0
12	5570	15	12.1	221	1
13	5570	15	14	278	1
14	5570	16	19.6	453	1
15	5570	16	16.1	273	1
16	5570	15	18.2	329	1
17	5570	13	13.5	401	0
18	5570	14	12	248	1
19	5570	13	11.1	265	0
20	5570	14	17.9	488	1
21	5570	12	14.6	493	1
22	5570	15	17.1	318	1
23	5570	13	17.2	240	0
24	5570	13	13.5	355	0
25	5570	16	17.3	405	1
26	5570	12	11.5	367	0
27	5570	13	11.2	268	0
28	5570	12	13	457	1
29	5570	15	14.3	228	1
30	5570	12	16.1	215	1
Detection Percentage (%)					66.67%

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Transmit (802.11ax-20 MHz)
 Test Date : 2023/04/20

Center Freq: 5500MHz				Low Edge: 5491MHz	High Edge: 5510MHz
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	18		5500	Statistical_Check_RandParm_For_Radar_Type_5_1_trail	1
2	8		5500	Statistical_Check_RandParm_For_Radar_Type_5_2_trail	1
3	12		5500	Statistical_Check_RandParm_For_Radar_Type_5_3_trail	1
4	17		5500	Statistical_Check_RandParm_For_Radar_Type_5_4_trail	1
5	5		5500	Statistical_Check_RandParm_For_Radar_Type_5_5_trail	1
6	19		5500	Statistical_Check_RandParm_For_Radar_Type_5_6_trail	1
7	7		5500	Statistical_Check_RandParm_For_Radar_Type_5_7_trail	1
8	15		5500	Statistical_Check_RandParm_For_Radar_Type_5_8_trail	1
9	8		5500	Statistical_Check_RandParm_For_Radar_Type_5_9_trail	1
10	10		5500	Statistical_Check_RandParm_For_Radar_Type_5_10_trail	1
11	17	6.8	5497.8	Statistical_Check_RandParm_For_Radar_Type_5_11_trail	1
12	14	5.6	5496.6	Statistical_Check_RandParm_For_Radar_Type_5_12_trail	0
13	19	7.6	5498.6	Statistical_Check_RandParm_For_Radar_Type_5_13_trail	1
14	11	4.4	5495.4	Statistical_Check_RandParm_For_Radar_Type_5_14_trail	1
15	13	5.2	5496.2	Statistical_Check_RandParm_For_Radar_Type_5_15_trail	0
16	5	2	5493	Statistical_Check_RandParm_For_Radar_Type_5_16_trail	1
17	5	2	5493	Statistical_Check_RandParm_For_Radar_Type_5_17_trail	0
18	19	7.6	5498.6	Statistical_Check_RandParm_For_Radar_Type_5_18_trail	1
19	6	2.4	5493.4	Statistical_Check_RandParm_For_Radar_Type_5_19_trail	1
20	19	7.6	5498.6	Statistical_Check_RandParm_For_Radar_Type_5_20_trail	1
21	13	5.2	5504.8	Statistical_Check_RandParm_For_Radar_Type_5_21_trail	1
22	7	2.8	5507.2	Statistical_Check_RandParm_For_Radar_Type_5_22_trail	1
23	9	3.6	5506.4	Statistical_Check_RandParm_For_Radar_Type_5_23_trail	1
24	8	3.2	5506.8	Statistical_Check_RandParm_For_Radar_Type_5_24_trail	1
25	14	5.6	5504.4	Statistical_Check_RandParm_For_Radar_Type_5_25_trail	1
26	18	7.2	5502.8	Statistical_Check_RandParm_For_Radar_Type_5_26_trail	1
27	14	5.6	5504.4	Statistical_Check_RandParm_For_Radar_Type_5_27_trail	1
28	5	2	5508	Statistical_Check_RandParm_For_Radar_Type_5_28_trail	1
29	11	4.4	5505.6	Statistical_Check_RandParm_For_Radar_Type_5_29_trail	1
30	12	4.8	5505.2	Statistical_Check_RandParm_For_Radar_Type_5_30_trail	1
Detection Percentage (%)					90.00
Limit					≥ 80

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	83.7	18	1305	1341	274.352
2	1	91.1	18			457.753
3	1	82.3	18			325.707
4	2	70.5	18	1412		63.51
5	3	70.1	18	1657	1375	344.633
6	3	81.6	18	1650	1706	111.847
7	3	74.3	18	1200	1315	579.85
8	2	51.7	18	1781		415.623
9	2	67.5	18	1426		419.117
10	1	93.9	18			548.82
11	1	52.9	18			529.053
12	2	99.9	18	1370		8.767
13	1	77.5	18			2.31
14	1	53.2	18			135.443
15	1	70.6	18			4.327
16	1	56.1	18			659
17	2	80.3	18	1312		56.033
18	2	95.9	18	1478		55.067

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	67.4	8			614.844
2	3	78.8	8	1498	1622	105.776
3	3	56.2	8	1287	1300	608.49
4	2	52.2	8	1270		601.68
5	1	52.7	8			160.42
6	3	72.8	8	1489	1620	371.98
7	3	62.7	8	1810	1575	649.58
8	1	88.9	8			219.52
9	2	62.1	8	1642		299.31
10	1	52.8	8			353.4
11	2	63.6	8	1029		512.61
12	1	67.8	8			187
13	3	75.8	8	1727	1225	239.37
14	2	51.1	8	1473		186.22
15	1	57.6	8			286.3
16	2	82	8	1296		297

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	94.4	17	1565		731.38
2	3	72.8	17	1242	1339	165.801
3	1	52.5	17			649.54
4	2	66.1	17	1938		245.6
5	2	85.6	17	1141		525.85
6	2	59.7	17	1264		119.58
7	2	88.9	17	1490		465.38
8	3	50.1	17	1782	1065	571.14
9	3	86.8	17	1145	1067	127.21
10	2	87.9	17	1349		240.01
11	2	52.4	17	1691		425.77
12	3	77.9	17	1588	1652	659.26
13	2	69.3	17	1550		560.53
14	3	58.9	17	1033	1996	677.4
15	1	53.2	17			263.5
16	2	52	17	1158		293.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	87.4	5			471.693
2	2	52.4	5	1326		133.189
3	2	66	5	1980		577.697
4	2	56.1	5	1763		80.87
5	2	85.3	5	1422		435.443
6	2	68.5	5	1909		562.867
7	3	98.5	5	1380	1597	145.7
8	3	74	5	1929	1824	46.493
9	3	83.3	5	1401	1173	470.177
10	2	60.9	5	1601		480.11
11	1	67.7	5			168.473
12	2	64.5	5	1371		442.647
13	3	70.8	5	1722	1888	107.4
14	1	88	5			386.163
15	2	93.1	5	1271		641.307
16	1	67.5	5			367.3
17	2	86.5	5	1990		571.033
18	1	59.5	5			644.367

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	87.4	7	1950		220.216
2	2	74.8	7	1099		373.02
3	2	89.3	7	1521		51.43
4	1	67.3	7			693.17
5	1	96.9	7			412.47
6	2	58.5	7	1898		505.25
7	2	69.4	7	1793		119.53
8	3	61	7	1980	1479	445.94
9	1	55.1	7			296.39
10	1	93.3	7			634.43
11	2	63.6	7	1514		459.77
12	2	88.8	7	1637		468.85
13	2	76.9	7	1531		93.15
14	2	76.8	7	1575		298.1
15	1	71.1	7			340.7
16	3	54.6	7	1794	1025	734.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	2	93.9	15	1478		810.401
2	3	50.5	15	1750	1658	128.68
3	2	83.1	15	1900		74.44
4	1	72.8	15			426.63
5	3	81.8	15	1346	1955	785.88
6	2	91.8	15	1587		779.76
7	2	59.4	15	1817		105.33
8	1	93	15			805.68
9	3	75.1	15	1103	1088	527
10	2	55.3	15	1813		863.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	91.6	8	1300	1109	543.172
2	1	77.6	8			675.76
3	3	90.4	8	1107	1344	673.65
4	2	94.8	8	1662		672.66
5	3	93.3	8	1238	1679	464.71
6	2	51.6	8	1766		519.29
7	2	78.6	8	1656		111.77
8	2	67.5	8	1825		689.62
9	1	73	8			162.98
10	3	68.6	8	1207	1225	648.09
11	2	88	8	1641		133.86
12	1	63.2	8			25.35
13	2	88	8	1071		189.37
14	1	90.3	8			644.2
15	3	61.9	8	1391	1292	499.7
16	2	52.7	8	1045		311.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	94.2	10	1135	1794	206.632
2	2	67.1	10	1985		294.83
3	2	96.3	10	1212		691.89
4	2	96.3	10	1178		261.68
5	2	52.1	10	1579		260.51
6	2	94.3	10	1753		362.59
7	2	86.9	10	1578		1080.32
8	2	55	10	1312		137.31
9	3	70.8	10	1764	1049	223.25
10	3	67.1	10	1151	1442	909.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	70	17	1117		316.459
2	1	70.6	17			192.21
3	3	62.7	17	1812	1795	943.44
4	3	81	17	1230	1170	366.39
5	2	53.8	17	1293		589.02
6	3	91	17	1710	1892	145.34
7	2	76.9	17	1660		171.76
8	2	71.9	17	1642		456.27
9	2	85	17	1568		237.8
10	2	53.4	17	1728		887.27
11	2	61.2	17	1026		513.6
12	3	70.3	17	1596	1287	123.1

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	69.7	14	1246		140.003
2	3	96.8	14	1973	1637	155.359
3	2	62.3	14	1460		441.287
4	2	59.5	14	1836		640.48
5	3	63.5	14	1242	1729	489.063
6	3	93.7	14	1593	1584	45.817
7	2	93.8	14	1928		230.52
8	2	76.7	14	1155		464.303
9	2	68.7	14	1664		462.647
10	2	80	14	1429		535.01
11	2	92.2	14	1068		94.353
12	2	74.6	14	1308		601.017
13	2	95.3	14	1646		80.11
14	1	98.8	14			208.843
15	2	74.2	14	1023		659.997
16	1	84.4	14			452.3
17	1	65.6	14			386.833
18	1	55.1	14			495.367

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	87.5	19			50.232
2	3	98.9	19	1848	1360	663.24
3	3	86.4	19	1273	1810	742.32
4	3	69.2	19	1232	1662	190.02
5	1	56.3	19			204.63
6	2	99.3	19	1054		768.9
7	2	82.4	19	1041		434.5
8	2	82	19	1839		190.19
9	2	67.9	19	1701		500.8
10	3	65	19	1253	1185	718.76
11	2	82.5	19	1925		576.25
12	3	63.3	19	1896	1366	209.76
13	2	99.5	19	1160		713.6
14	2	69.7	19	1760		713.1
15	1	55.6	19			48.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	58.4	11	1120	1076	281.153
2	2	91.4	11	1865		219.464
3	3	77.7	11	1824	1367	51.257
4	3	74.5	11	1183	1248	152.17
5	1	59.5	11			549.233
6	1	72	11			264.987
7	3	84.1	11	1016	1804	145.61
8	2	78	11	1153		320.173
9	2	65.7	11	1164		580.097
10	2	60.5	11	1398		175.22
11	2	56.2	11	1953		597.093
12	3	78	11	1904	1707	48.967
13	2	90.3	11	1258		304.04
14	2	64.7	11	1714		38.563
15	2	77.8	11	1822		339.237
16	1	95.4	11			70.7
17	2	68	11	1265		164.833
18	3	83	11	1916	1743	66.967

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	92.5	13	1285		593.478
2	1	91	13			101.978
3	1	97.4	13			491.317
4	3	76.6	13	1837	1318	657.78
5	1	78.4	13			618.513
6	3	99.4	13	1209	1197	77.627
7	2	71.8	13	1632		28.34
8	2	99.7	13	1660		565.513
9	2	79.2	13	1260		517.587
10	3	76.2	13	1117	1585	420.8
11	1	76.5	13			491.263
12	1	60.3	13			3.957
13	2	68.6	13	1261		298.94
14	2	62	13	1771		243.053
15	2	67.6	13	1047		87.197
16	1	70	13			358.5
17	2	72	13	1220		309.933
18	2	94.6	13	1131		531.367

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	99.1	5	1315		35.034
2	1	99	5			164.562
3	1	76.8	5			299.777
4	3	89.8	5	1228	1280	398.55
5	1	91.3	5			586.523
6	2	66.5	5	1505		605.687
7	3	54.8	5	1069	1239	309.67
8	3	87.8	5	1404	1724	538.993
9	3	94.5	5	1327	1712	113.007
10	3	87.8	5	1628	1514	391.59
11	2	73	5	1290		595.223
12	2	77.1	5	1939		161.587
13	3	94.4	5	1281	1803	115.13
14	2	52.7	5	1221		366.993
15	3	71.3	5	1814	1556	415.977
16	1	73.4	5			142
17	1	70	5			143.233
18	2	91	5	1391		248.367

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	55.4	5	1430	1322	391.166
2	2	82.4	5	1698		85.823
3	2	64.5	5	1751		334.785
4	2	69.1	5	1643		506.983
5	3	79.8	5	1998	1131	313.351
6	3	71.2	5	1121	1606	669.198
7	3	85.1	5	1290	1947	496.576
8	2	63.4	5	1630		671.854
9	3	75	5	1611	1205	286.381
10	2	51.2	5	1930		104.379
11	2	83.9	5	1599		110.896
12	2	51.3	5	1308		388.064
13	3	57.8	5	1305	1517	73.592
14	3	53.5	5	1182	1885	234.829
15	3	74.2	5	1488	1035	520.747
16	2	59.4	5	1926		355.165
17	2	76.5	5	1322		68.382

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	95.1	19			430.396
2	3	74.7	19	1726	1427	411.7
3	2	66.7	19	1888		575.11
4	1	52.9	19			417.48
5	3	87	19	1390	1451	549.39
6	3	64.9	19	1987	1087	791.55
7	2	72.6	19	1857		571.3
8	2	66.2	19	1039		477.43
9	3	96.1	19	1682	1011	24.6
10	2	73.9	19	1678		453.24
11	2	60.2	19	1063		57.05
12	3	98.4	19	1218	1365	176.36
13	2	70	19	1876		431.9
14	2	87.9	19	1999		221.4
15	2	76.2	19	1178		209.6

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	86.1	6			330.313
2	1	86	6			322.178
3	3	61.2	6	1898	1991	384.155
4	1	65.5	6			264.173
5	2	99.8	6	1703		526.391
6	2	63.3	6	1426		125.448
7	1	72.5	6			166.616
8	2	75.9	6	1467		202.954
9	2	94.2	6	1047		375.861
10	2	51.8	6	1677		200.289
11	3	96.9	6	1525	1521	603.556
12	1	57.2	6			254.654
13	2	55.8	6	1689		110.212
14	1	92.3	6			148.759
15	3	82.9	6	1344	1748	163.647
16	2	88.8	6	1978		246.065
17	1	86.8	6			128.782

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	73.2	19	1429		185.933
2	3	95.3	19	1893	1673	252.631
3	2	81.3	19	1258		209.105
4	3	70.4	19	1101	1260	208.183
5	2	55.2	19	1944		513.761
6	1	68.7	19			542.508
7	2	87.9	19	1171		494.276
8	3	77.9	19	1328	1920	648.484
9	1	88.6	19			541.781
10	2	76.3	19	1568		151.739
11	2	83.1	19	1533		57.756
12	1	57.3	19			292.384
13	3	81.1	19	1349	1776	264.422
14	1	53.2	19			587.519
15	2	58	19	1095		446.247
16	1	96.6	19			647.565
17	3	82.2	19	1472	1439	342.882

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	93.5	13	1613		139.579
2	2	54.1	13	1854		35.242
3	3	89.2	13	1707	1966	429.147
4	2	88.2	13	1331		191.23
5	2	62.5	13	1316		634.873
6	1	50.9	13			265.757
7	2	76.8	13	1480		214.09
8	2	86.2	13	1390		145.153
9	2	71.3	13	1761		650.867
10	2	54.9	13	1611		408.62
11	3	56.1	13	1441	1050	112.963
12	1	64	13			563.677
13	2	88.6	13	1051		620.76
14	2	74.9	13	1171		30.433
15	3	87.6	13	1549	1776	489.427
16	1	51.1	13			76.5
17	1	99.9	13			302.533
18	2	83.3	13	1462		13.567

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	80.1	7	1999		444.777
2	1	84.7	7			417.531
3	2	92.8	7	1748		702.082
4	1	93.2	7			648.413
5	2	55.8	7	1652		1081.284
6	2	62.5	7	1705		274.475
7	2	64.6	7	1167		648.005
8	2	73.4	7	1208		1.016
9	1	64.3	7			255.727
10	2	87.3	7	1918		959.718
11	3	86.4	7	1287	1733	554.609

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	90.9	9			485.632
2	3	94.6	9	1670	1050	404.631
3	2	50.5	9	1291		276.202
4	3	93.3	9	1456	1944	431.163
5	2	87.9	9	1671		210.334
6	2	69.5	9	1437		448.645
7	2	76.9	9	1025		163.476
8	3	65.3	9	1084	1477	281.627
9	1	96	9			362.828
10	2	70.2	9	1398		58.509
11	2	95.8	9	1393		212.101
12	2	99.1	9	1912		255.002
13	2	55.6	9	1649		550.553
14	3	69.1	9	1469	1272	493.224
15	2	95.5	9	1421		198.235
16	2	60.8	9	1573		414.826
17	2	80.2	9	1972		367.737
18	1	90.3	9			343.258
19	2	75.5	9	1661		52.679

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	79.9	8	1503		117.5
2	3	94.6	8	1435	1751	158.783
3	2	92.9	8	1104		558.675
4	1	61.1	8			472.303
5	2	62.4	8	1999		478.991
6	3	65.6	8	1295	1056	508.198
7	2	73.6	8	1226		280.776
8	1	79.3	8			231.024
9	1	65.2	8			87.311
10	3	66.6	8	1666	1323	288.899
11	1	65.4	8			597.496
12	3	70.2	8	1545	1365	161.694
13	3	59.6	8	1907	1835	223.752
14	2	79.3	8	1925		516.169
15	2	51.9	8	1180		285.447
16	2	97.1	8	1729		533.165
17	2	73.8	8	1915		646.882

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	80.6	14	1768		462.286
2	1	55.2	14			62.938
3	3	58.5	14	1991	1582	73.447
4	3	54.7	14	1736	1564	344.85
5	3	78.1	14	1447	1130	333.183
6	1	64.4	14			64.767
7	3	71	14	1677	1630	237.81
8	3	94.8	14	1078	1825	114.693
9	1	55.6	14			30.447
10	2	95.8	14	1082		383.74
11	3	67.9	14	1177	1049	231.213
12	2	77	14	1630		521.417
13	3	52.2	14	1481	1409	486.58
14	3	58	14	1462	1249	589.553
15	3	71.8	14	1283	1415	158.947
16	3	84.5	14	1377	1223	252.1
17	2	89	14	1850		645.433
18	2	60.3	14	1886		379.467

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	53.7	18	1330		460.622
2	3	72.3	18	1038	1841	850.677
3	1	87.8	18			312.204
4	2	89.1	18	1675		383.381
5	1	51.6	18			229.879
6	3	65.9	18	1975	1865	255.206
7	2	81.6	18	1427		61.333
8	3	99	18	1973	1075	498.55
9	3	85.6	18	1904	1425	844.807
10	1	72.4	18			71.364
11	1	68.9	18			227.171
12	2	50.9	18	1087		461.879
13	2	87	18	1503		254.686
14	3	54.5	18	1462	1356	205.343

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	66.6	14			217.557
2	1	52	14			585.107
3	2	95.7	14	1954		60.874
4	1	73.1	14			241.711
5	3	83.7	14	1576	1650	53.389
6	2	60.1	14	1668		305.826
7	1	82.8	14			651.123
8	2	88.6	14	1329		176.99
9	3	77.8	14	1943	1659	748.267
10	3	75.8	14	1867	1226	72.134
11	2	77.9	14	1197		68.331
12	2	99.3	14	1587		48.789
13	1	87.6	14			358.186
14	1	68.9	14			819.643

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	83.3	5	1848		742.857
2	2	73.9	5	1041		275.76
3	3	61.9	5	1624	1091	701.76
4	2	53.5	5	1290		73.46
5	1	87	5			526.23
6	3	94.6	5	1773	1552	580.29
7	1	83.2	5			431.75
8	2	56.4	5	1745		749.65
9	3	57.4	5	1880	1665	417.52
10	2	60.1	5	1127		98.07
11	3	99.4	5	1811	1266	207.56
12	1	79.9	5			45.93
13	2	82.2	5	1846		0.61
14	3	64.9	5	1538	1270	167.6
15	2	53.9	5	1245		662


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	59.9	11	1194	1397	299.599
2	3	83.6	11	1177	1138	436.011
3	3	96.1	11	1175	1293	408.482
4	1	83	11			369.603
5	2	89.1	11	1900		137.334
6	1	69.5	11			191.695
7	2	74	11	1335		44.596
8	1	94.6	11			413.967
9	2	63.3	11	1789		454.918
10	2	91.1	11	1060		622.039
11	3	70.1	11	1019	1785	523.441
12	3	99.9	11	1196	1762	527.722
13	2	61.9	11	1987		250.393
14	1	65.7	11			339.744
15	2	58	11	1549		317.305
16	2	86.6	11	1243		21.396
17	2	82.5	11	1851		426.437
18	2	62.5	11	1910		603.858
19	1	50.7	11			486.379



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	63.6	12	1421		91.198
2	1	93.3	12			71.037
3	2	51.6	12	1377		198.545
4	2	75	12	1959		77.893
5	3	96.8	12	1893	1889	136.311
6	2	74.3	12	1984		321.068
7	3	88.7	12	1035	1586	337.166
8	3	57	12	1959	1990	310.524
9	3	74.7	12	1110	1742	601.011
10	1	67.1	12			343.589
11	2	85.8	12	1431		36.886
12	3	63.5	12	1712	1621	474.944
13	2	98.4	12	1227		558.792
14	2	73.3	12	1880		544.329
15	2	52.9	12	1813		695.447
16	2	86.5	12	1139		614.665
17	3	69.4	12	1551	1494	53.782

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Transmit (802.11ax-40 MHz)
 Test Date : 2023/04/20

Center Freq: 5510MHz				Low Edge: 5491MHz	High Edge: 5529MHz
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	8		5510	Statistical_Check_RandParm_For_Radar_Type_5_1_trail	1
2	15		5510	Statistical_Check_RandParm_For_Radar_Type_5_2_trail	1
3	9		5510	Statistical_Check_RandParm_For_Radar_Type_5_3_trail	1
4	12		5510	Statistical_Check_RandParm_For_Radar_Type_5_4_trail	1
5	16		5510	Statistical_Check_RandParm_For_Radar_Type_5_5_trail	1
6	15		5510	Statistical_Check_RandParm_For_Radar_Type_5_6_trail	1
7	11		5510	Statistical_Check_RandParm_For_Radar_Type_5_7_trail	1
8	19		5510	Statistical_Check_RandParm_For_Radar_Type_5_8_trail	1
9	6		5510	Statistical_Check_RandParm_For_Radar_Type_5_9_trail	1
10	18		5510	Statistical_Check_RandParm_For_Radar_Type_5_10_trail	1
11	8	3.2	5494.2	Statistical_Check_RandParm_For_Radar_Type_5_11_trail	1
12	15	6	5497	Statistical_Check_RandParm_For_Radar_Type_5_12_trail	0
13	6	2.4	5493.4	Statistical_Check_RandParm_For_Radar_Type_5_13_trail	1
14	19	7.6	5498.6	Statistical_Check_RandParm_For_Radar_Type_5_14_trail	1
15	10	4	5495	Statistical_Check_RandParm_For_Radar_Type_5_15_trail	0
16	18	7.2	5498.2	Statistical_Check_RandParm_For_Radar_Type_5_16_trail	1
17	15	6	5497	Statistical_Check_RandParm_For_Radar_Type_5_17_trail	0
18	18	7.2	5498.2	Statistical_Check_RandParm_For_Radar_Type_5_18_trail	0
19	15	6	5497	Statistical_Check_RandParm_For_Radar_Type_5_19_trail	1
20	5	2	5493	Statistical_Check_RandParm_For_Radar_Type_5_20_trail	1
21	16	6.4	5522.6	Statistical_Check_RandParm_For_Radar_Type_5_21_trail	1
22	17	6.8	5522.2	Statistical_Check_RandParm_For_Radar_Type_5_22_trail	1
23	15	6	5523	Statistical_Check_RandParm_For_Radar_Type_5_23_trail	1
24	19	7.6	5521.4	Statistical_Check_RandParm_For_Radar_Type_5_24_trail	1
25	8	3.2	5525.8	Statistical_Check_RandParm_For_Radar_Type_5_25_trail	1
26	13	5.2	5523.8	Statistical_Check_RandParm_For_Radar_Type_5_26_trail	1
27	9	3.6	5525.4	Statistical_Check_RandParm_For_Radar_Type_5_27_trail	1
28	11	4.4	5524.6	Statistical_Check_RandParm_For_Radar_Type_5_28_trail	1
29	19	7.6	5521.4	Statistical_Check_RandParm_For_Radar_Type_5_29_trail	1
30	9	3.6	5525.4	Statistical_Check_RandParm_For_Radar_Type_5_30_trail	1
Detection Percentage (%)					86.67
Limit					≥ 80

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 1

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	65	15	1279	1551	546.403
2	1	90.3	15			627.7
3	3	54.4	15	1298	1479	708.05
4	1	53	15			374.47
5	1	80.5	15			147.21
6	3	90.7	15	1408	1677	335.81
7	1	75.2	15			142.67
8	2	53.3	15	1014		17.53
9	2	94.7	15	1121		27.47
10	1	66.2	15			532.29
11	1	63.4	15			638.65
12	1	87.5	15			178.22
13	3	67.4	15	1783	1413	707.39
14	2	86.2	15	1559		441.3
15	2	67.1	15	1788		669.9
16	2	91.5	15	1074		130.8

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 8

[illegible]

--

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	58.2	16	1649		137.949
2	2	93.5	16	1777		561.141
3	3	68.2	16	1831	1397	146.522
4	3	77.8	16	1208	1280	486.783
5	2	53.2	16	1831		91.834
6	1	81.6	16			239.195
7	2	78.5	16	1729		431.336
8	1	56.2	16			211.367
9	3	64.6	16	1506	1441	206.198
10	3	59.3	16	1963	1875	307.049
11	2	62.6	16	1956		234.201
12	2	57.1	16	1878		474.892
13	2	89.3	16	1476		444.793
14	1	62.9	16			612.444
15	1	91.1	16			451.165
16	2	60.9	16	1228		600.116
17	2	99.1	16	1014		485.937
18	2	78.1	16	1035		207.158
19	1	72.7	16			169.179

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	85.9	15	1139		479.674
2	1	62.4	15			435.731
3	3	78	15	1226	1273	391.952
4	2	50.9	15	1655		45.563
5	3	52.6	15	1604	1103	458.624
6	2	54.2	15	1313		70.085
7	2	95.3	15	1839		245.746
8	3	57.3	15	1511	1590	24.557
9	2	72.9	15	1062		185.128
10	1	65.7	15			573.189
11	3	66.9	15	1414	1937	430.791
12	2	79.8	15	1278		216.262
13	1	57.1	15			206.763
14	2	55.9	15	1998		223.364
15	1	56.8	15			263.315
16	2	63.9	15	1342		319.926
17	1	75.1	15			591.337
18	2	72.7	15	1359		365.258
19	1	66.1	15			251.479

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	62	11	1070	1426	153.305
2	2	70.4	11	1058		1077.631
3	3	56.9	11	1548	1445	706.552
4	3	81.6	11	1213	1564	255.303
5	2	97.3	11	1110		309.584
6	2	53.1	11	1578		806.975
7	2	90.3	11	1715		672.095
8	1	93.4	11			156.726
9	1	73.6	11			701.117
10	1	83.6	11			738.518
11	3	52.5	11	1538	1520	32.809

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	54.7	19	1551		276.831
2	1	64.4	19			215.089
3	2	61.2	19	1436		680.935
4	3	60.9	19	1342	1984	665.913
5	1	56.8	19			149.381
6	2	54.5	19	1835		297.278
7	2	73.1	19	1819		529.806
8	2	86.4	19	1376		485.434
9	3	91.2	19	1462	1994	4.701
10	2	51.2	19	1325		355.349
11	2	71.2	19	1215		584.796
12	2	62.6	19	1060		493.984
13	2	84.1	19	1188		308.782
14	2	77.2	19	1082		260.669
15	2	90	19	1711		624.947
16	1	52.7	19			80.865
17	2	66.9	19	1605		418.382

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	84.4	6	1688	1591	605.618
2	2	90.4	6	1529		274.748
3	3	84.2	6	1302	1492	573.702
4	2	97.8	6	1916		151.943
5	1	62	6			88.474
6	3	82.2	6	1782	1756	102.095
7	1	55.8	6			395.526
8	2	92.4	6	1284		236.007
9	1	53.1	6			92.498
10	2	63.3	6	1488		490.689
11	2	74.3	6	1039		623.521
12	2	53.7	6	1586		152.592
13	2	83.2	6	1309		4.053
14	3	96.6	6	1759	1365	456.914
15	2	52.7	6	1684		539.145
16	2	70.8	6	1699		451.426
17	3	58.4	6	1468	1296	452.737
18	3	73.4	6	1761	1801	502.858
19	2	52.4	6	1968		128.679

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	57.1	15	1115	1173	234.681
2	2	83.5	15	1146		110.334
3	3	98.1	15	1615	1920	351.24
4	2	74.2	15	1185		444.77
5	3	68.9	15	1487	1967	1.48
6	2	74.4	15	1307		570.73
7	1	58.8	15			460.5
8	2	94.2	15	1820		123.6
9	1	74.1	15			59.51
10	2	62.2	15	1452		334.34
11	1	77.5	15			323.27
12	1	81.8	15			576.1
13	2	74	15	1566		286.18
14	3	90.1	15	1520	1794	154.38
15	2	99.2	15	1420		557.99
16	3	68.6	15	1069	1908	11.28
17	3	55.7	15	1473	1932	275.6
18	2	94.5	15	1312		115.8
19	3	87.9	15	1917	1431	488.1
20	3	50.9	15	1152	1085	393.8

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	68.1	6			1297.45
2	1	95.7	6			401.517
3	2	80.2	6	1378		363.673
4	3	56.6	6	1878	1201	49.94
5	1	76.4	6			1027.317
6	2	71.8	6	1282		398.843
7	1	76.1	6			1027.62
8	3	85.8	6	1820	1059	412.927
9	3	51.7	6	1093	1127	459.433

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	79.1	19	1082	1643	223.442
2	1	50.8	19			412.71
3	1	75.3	19			564.45
4	3	78.1	19	1253	1347	305.36
5	2	57.3	19	1243		107.76
6	2	90.7	19	1262		444.03
7	2	87.8	19	1439		381.32
8	1	57.5	19			379.27
9	2	56.4	19	1972		188.97
10	2	77	19	1280		216.74
11	2	81.2	19	1278		402.03
12	2	62.1	19	1604		299.92
13	2	60.8	19	1407		43.51
14	3	98.7	19	1172	1238	262.39
15	2	61.9	19	1031		522.48
16	2	98.5	19	1015		84.07
17	1	51.2	19			222.64
18	1	99.3	19			58.3
19	2	70.1	19	1589		376.7
20	3	98.1	19	1372	1460	331.7

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	96	10			632.043
2	2	76.1	10	1007		38.299
3	1	61.2	10			1.134
4	2	53.2	10	1995		817.591
5	2	64.9	10	1506		375.629
6	2	64.6	10	1097		246.226
7	2	91.1	10	1328		220.733
8	3	88.6	10	1167	1646	772.66
9	1	76.9	10			35.987
10	3	96.2	10	1878	1872	714.074
11	2	74	10	1107		228.011
12	2	97.3	10	1290		743.629
13	3	69.2	10	1557	1650	695.286
14	3	90.9	10	1194	1344	611.543

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	75.7	18	1745	1780	46.557
2	2	54.4	18	1771		40.083
3	2	76.4	18	1378		246.45
4	3	79.1	18	1903	1208	171.46
5	3	69.3	18	1564	1829	522.4
6	2	68.5	18	1893		271.31
7	1	93.8	18			556.28
8	2	78	18	1759		457.61
9	2	75.7	18	1950		219.96
10	1	62.3	18			482.6
11	1	64.7	18			360.16
12	2	91.1	18	1341		512.55
13	2	55.8	18	1275		338.49
14	1	68.7	18			349.72
15	2	52.7	18	1788		49.94
16	1	99.2	18			200.66
17	1	56.9	18			135.8
18	3	53.8	18	1083	1374	167.3
19	1	60.1	18			108.7
20	1	80.7	18			144

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	65.9	15	1219		372.723
2	3	93.3	15	1058	1908	819.03
3	1	74.2	15			900.26
4	1	73.2	15			986.71
5	2	57	15	1404		59.92
6	2	84.9	15	1180		477.15
7	2	59.4	15	1376		511.01
8	2	74.7	15	1059		491.42
9	3	77.7	15	1793	1705	93.72
10	2	86.9	15	1425		750.6

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 8

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	57.3	18			385.852
2	2	98.4	18	1564		82.36
3	1	81.4	18			577.48
4	1	63.4	18			743.17
5	3	91.4	18	1863	1075	1297.43
6	1	86.1	18			338.17
7	2	61.9	18	1509		891.92
8	3	92.5	18	1322	1450	1434.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	66.6	15	1736		203.03
2	3	98.7	15	1050	1738	898.403
3	3	63.3	15	1558	1452	720.446
4	2	62.5	15	1401		851.599
5	2	89.4	15	1072		755.232
6	3	83.7	15	1121	1666	473.515
7	2	99.1	15	1194		692.958
8	1	80.2	15			57.672
9	3	54.9	15	1812	1166	566.665
10	3	59.6	15	1789	1669	545.448
11	2	56.7	15	1340		591.371
12	2	66.2	15	1795		340.454
13	2	91.7	15	1369		174.777

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	53.1	5	1547		223.052
2	1	59.4	5			326.731
3	2	87.1	5	1235		149.08
4	1	58.8	5			466.66
5	2	91.9	5	1016		320.86
6	1	61.6	5			417.58
7	2	67.1	5	1510		387.13
8	2	69.3	5	1259		341.15
9	2	57	5	1813		514.2
10	2	90.9	5	1061		515.62
11	2	61.6	5	1517		432.68
12	2	53.1	5	1243		60.84
13	3	65	5	1834	1928	343.41
14	2	90	5	1629		157.14
15	3	70.5	5	1128	1347	326.69
16	2	75.7	5	1228		261.7
17	1	96.8	5			4.87
18	3	85.5	5	1910	1493	87.1
19	2	94.5	5	1634		80.6
20	1	92.4	5			142.1

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	59.2	16			417.711
2	2	93.9	16	1462		623.08
3	1	67.2	16			924.91
4	3	60.7	16	1209	1041	152.26
5	2	91.9	16	1200		801.23
6	2	94.3	16	1717		215.84
7	2	71.4	16	1752		26.85
8	3	69.2	16	1971	1601	471.76
9	2	53.8	16	1382		110.37
10	2	87.7	16	1270		606
11	2	58.9	16	1092		45.6
12	2	85.1	16	1748		603.1

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	91.8	15	1636	1605	61.553
2	3	80.8	15	1744	1321	10.026
3	1	97.7	15			90.06
4	2	58.9	15	1638		200.11
5	1	84.2	15			123.04
6	2	87.7	15	1645		244.62
7	3	53.1	15	1937	1609	734.16
8	2	80.4	15	1435		517.81
9	2	83	15	1309		212.62
10	3	85.2	15	1108	1299	380.08
11	2	65.6	15	1677		745.02
12	2	77.4	15	1300		587.98
13	1	71.3	15			738.3
14	3	71.9	15	1471	1692	18.3
15	1	79.7	15			539.6

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 24

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	77.1	8	1925		758.312
2	2	50.8	8	1419		752.403
3	2	84.2	8	1748		369.146
4	2	51	8	1514		404.189
5	1	57.7	8			79.472
6	2	95.1	8	1075		589.835
7	3	74.5	8	1061	1855	307.738
8	2	90.1	8	1257		336.592
9	2	62.4	8	1799		28.125
10	2	59.6	8	1210		208.418
11	2	70.7	8	1034		248.571
12	2	83.7	8	1120		843.854
13	3	89.3	8	1616	1651	208.877

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	50.7	13	1754		583.064
2	1	51.9	13			729.1
3	2	66.8	13	1615		329.7
4	2	86.4	13	1500		130.9
5	2	90.1	13	1058		776.01
6	2	55.9	13	1212		157.49
7	2	86.5	13	1292		705.19
8	2	76.4	13	1242		278.62
9	2	92.4	13	1474		556.99
10	3	58.9	13	1224	1772	350.93
11	3	67.6	13	1667	1605	203.07
12	2	74.6	13	1030		249
13	1	73.9	13			550
14	2	63.3	13	1041		271.7
15	2	55.6	13	1227		443.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	70.2	9			133.72
2	1	72.2	9			811.087
3	1	98.7	9			407.224
4	2	71.3	9	1990		725.771
5	2	90.5	9	1486		21.269
6	2	89.5	9	1301		118.156
7	2	93.8	9	1289		71.443
8	2	85.5	9	1344		270.11
9	2	76.2	9	1861		773.107
10	2	90.8	9	1754		357.244
11	3	75.2	9	1230	1259	265.831
12	3	66.6	9	1444	1566	751.629
13	3	74.9	9	1698	1327	774.286
14	1	96.8	9			36.143

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	88.1	11	1927	1734	648.696
2	1	64.2	11			118.261
3	2	87.8	11	1765		835.672
4	1	68.8	11			374.543
5	2	92	11	1877		971.344
6	3	76.2	11	1998	1139	672.735
7	1	99.3	11			525.295
8	2	93.1	11	1981		755.846
9	3	52.4	11	1282	1196	449.207
10	2	58.6	11	1265		300.018
11	2	75.2	11	1328		208.709

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	97.3	9	1978		596.016
2	3	95.5	9	1444	1135	252.525
3	2	74.7	9	1870		147.165
4	1	66.8	9			219.963
5	3	74.2	9	1203	1378	81.311
6	1	61.7	9			172.448
7	2	57.7	9	1350		36.856
8	2	83.7	9	1643		182.844
9	1	65.4	9			224.441
10	2	73.9	9	1392		687.969
11	3	97	9	1409	1889	658.926
12	1	84.8	9			366.384
13	2	51.3	9	1170		378.532
14	1	67.6	9			22.669
15	3	64.9	9	1526	1945	22.987
16	3	84.4	9	1359	1239	394.065
17	3	83.7	9	1486	1089	531.082

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Transmit (802.11ax-80 MHz)
 Test Date : 2023/04/20

Center Freq: 5530MHz				Low Edge: 5492MHz	High Edge: 5569MHz
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	6		5530	Statistical_Check_RandParm_For_Radar_Type_5_1_trail	1
2	15		5530	Statistical_Check_RandParm_For_Radar_Type_5_2_trail	1
3	19		5530	Statistical_Check_RandParm_For_Radar_Type_5_3_trail	1
4	19		5530	Statistical_Check_RandParm_For_Radar_Type_5_4_trail	1
5	14		5530	Statistical_Check_RandParm_For_Radar_Type_5_5_trail	1
6	13		5530	Statistical_Check_RandParm_For_Radar_Type_5_6_trail	1
7	15		5530	Statistical_Check_RandParm_For_Radar_Type_5_7_trail	1
8	12		5530	Statistical_Check_RandParm_For_Radar_Type_5_8_trail	1
9	12		5530	Statistical_Check_RandParm_For_Radar_Type_5_9_trail	1
10	6		5530	Statistical_Check_RandParm_For_Radar_Type_5_10_trail	1
11	16	6.4	5498.4	Statistical_Check_RandParm_For_Radar_Type_5_11_trail	1
12	8	3.2	5495.2	Statistical_Check_RandParm_For_Radar_Type_5_12_trail	0
13	8	3.2	5495.2	Statistical_Check_RandParm_For_Radar_Type_5_13_trail	1
14	11	4.4	5496.4	Statistical_Check_RandParm_For_Radar_Type_5_14_trail	1
15	15	6	5498	Statistical_Check_RandParm_For_Radar_Type_5_15_trail	0
16	8	3.2	5495.2	Statistical_Check_RandParm_For_Radar_Type_5_16_trail	0
17	18	7.2	5499.2	Statistical_Check_RandParm_For_Radar_Type_5_17_trail	1
18	12	4.8	5496.8	Statistical_Check_RandParm_For_Radar_Type_5_18_trail	0
19	13	5.2	5497.2	Statistical_Check_RandParm_For_Radar_Type_5_19_trail	0
20	13	5.2	5497.2	Statistical_Check_RandParm_For_Radar_Type_5_20_trail	1
21	13	5.2	5563.8	Statistical_Check_RandParm_For_Radar_Type_5_21_trail	1
22	7	2.8	5566.2	Statistical_Check_RandParm_For_Radar_Type_5_22_trail	1
23	7	2.8	5566.2	Statistical_Check_RandParm_For_Radar_Type_5_23_trail	1
24	16	6.4	5562.6	Statistical_Check_RandParm_For_Radar_Type_5_24_trail	1
25	9	3.6	5565.4	Statistical_Check_RandParm_For_Radar_Type_5_25_trail	1
26	5	2	5567	Statistical_Check_RandParm_For_Radar_Type_5_26_trail	1
27	9	3.6	5565.4	Statistical_Check_RandParm_For_Radar_Type_5_27_trail	1
28	12	4.8	5564.2	Statistical_Check_RandParm_For_Radar_Type_5_28_trail	1
29	7	2.8	5566.2	Statistical_Check_RandParm_For_Radar_Type_5_29_trail	1
30	9	3.6	5565.4	Statistical_Check_RandParm_For_Radar_Type_5_30_trail	1
Detection Percentage (%)					83.33
Limit					≥ 80

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	82.6	6			662.88
2	2	74.4	6	1100		500.007
3	2	50.5	6	1964		564.194
4	2	83.9	6	1957		321.031
5	2	68.1	6	1168		713.229
6	2	74.4	6	1176		288.046
7	2	79.7	6	1884		572.783
8	2	53.9	6	1213		525.76
9	1	72.9	6			693.687
10	3	69.2	6	1006	1468	286.444
11	1	54	6			126.951
12	1	83.3	6			746.029
13	1	85.3	6			433.086
14	3	61.9	6	1306	1462	430.343

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	52.3	15	1693		645.172
2	2	51.6	15	1274		89.08
3	2	83.2	15	1881		813.38
4	2	91.7	15	1758		718.48
5	3	58.4	15	1006	1358	378.57
6	3	56.1	15	1632	1464	273.85
7	2	98.7	15	1706		275.49
8	1	65.6	15			389.26
9	3	52.7	15	1874	1470	911.33
10	2	56.2	15	1184		13.82
11	2	81.3	15	1488		500.9
12	2	94.6	15	1435		109.6

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	64.3	19	1522		320.413
2	2	89.2	19	1994		16.3
3	2	51.4	19	1613		362.815
4	2	98.8	19	1759		143.453
5	2	83.3	19	1029		321.831
6	1	68.4	19			459.058
7	2	59.2	19	1190		192.496
8	2	68.8	19	1780		588.844
9	2	88	19	1512		263.861
10	2	64.1	19	1120		472.019
11	2	99.7	19	1239		44.156
12	2	88.3	19	1281		669.294
13	2	54.9	19	1020		170.782
14	2	53.4	19	1302		180.329
15	1	62.4	19			209.847
16	2	90.8	19	1822		120.065
17	2	78.8	19	1986		464.582

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	92	14			250.446
2	2	54.5	14	1730		459.12
3	3	85.4	14	1013	1537	267.77
4	3	77.1	14	1958	1652	110.76
5	2	97.5	14	1097		170.47
6	2	99.4	14	1727		721.53
7	1	80.5	14			383.9
8	2	62.2	14	1384		777.04
9	1	72.1	14			567.64
10	2	53.1	14	1970		322.87
11	2	56.6	14	1503		786.35
12	2	90.2	14	1527		665.97
13	1	64.7	14			363.11
14	1	62.7	14			59
15	2	54.1	14	1232		396.7

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 8

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	80.6	13	1332		604.306
2	2	58.6	13	1109		1451.08
3	3	65.4	13	1965	1459	1153.78
4	3	60.7	13	1854	1510	1243.87
5	3	84.7	13	1567	1222	1010.46
6	2	83	13	1648		1237.44
7	3	96	13	1331	1460	1293.3
8	2	62.2	13	1990		1107.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	61	15	1751		400.707
2	1	50.2	15			649.373
3	1	59.6	15			578.077
4	2	54.9	15	1185		462.08
5	2	64.1	15	1619		647.703
6	3	66.1	15	1217	1333	218.457
7	1	55.3	15			141
8	3	71.7	15	1007	1669	359.893
9	2	68.8	15	1681		108.047
10	2	72	15	1111		267.47
11	3	72.5	15	1181	1441	103.803
12	2	88	15	1820		392.817
13	2	84	15	1670		455.33
14	3	58.9	15	1573	1950	53.083
15	2	58.1	15	1861		101.607
16	2	72.8	15	1837		485
17	2	83.7	15	1273		424.033
18	1	90.9	15			126.767

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	93.2	12	1639		486.206
2	2	89.7	12	1468		134.012
3	2	50.9	12	1478		533.987
4	2	75.5	12	1487		428.43
5	2	74.4	12	1573		120.373
6	2	75.4	12	1224		253.777
7	2	59.4	12	1001		77.1
8	3	74	12	1722	1521	362.533
9	2	79.7	12	1990		217.697
10	2	80.4	12	1240		295.9
11	2	85.3	12	1371		212.383
12	2	94.4	12	1958		175.467
13	3	63.5	12	1564	1392	658.22
14	1	61	12			502.763
15	2	56.4	12	1604		323.257
16	1	55.9	12			67.4
17	2	55.8	12	1164		46.433
18	2	55.7	12	1975		103.667

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	71.5	12	1729		75.807
2	1	57.7	12			20.805
3	3	89.7	12	1259	1033	279.777
4	1	57.6	12			275.13
5	1	51.6	12			284.593
6	2	90.6	12	1884		355.107
7	1	83.1	12			419.52
8	2	58	12	1984		411.313
9	2	72.5	12	1336		291.877
10	3	92.6	12	1527	1648	96.5
11	3	88.2	12	1745	1262	21.723
12	3	80.1	12	1800	1238	317.267
13	2	65.1	12	1831		425.69
14	1	80.7	12			276.363
15	3	56.1	12	1304	1539	427.977
16	3	63.6	12	1792	1356	469.8
17	1	51.6	12			388.533
18	2	97.2	12	1212		487.367

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	69.6	6	1315	1701	404.379
2	3	63.2	6	1168	1188	951.381
3	1	92.4	6			36.182
4	2	74.7	6	1576		309.043
5	2	82.7	6	1648		599.584
6	1	75.7	6			648.705
7	1	67.6	6			1039.355
8	2	57.1	6	1792		38.976
9	2	52.6	6	1650		123.557
10	2	86.1	6	1516		886.718
11	2	72.9	6	1339		515.809

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	61.7	16	1289		234.345
2	2	57.5	16	1430		502.763
3	3	66.7	16	1869	1735	388.916
4	3	51.9	16	1608	1639	390.319
5	2	62	16	1352		479.802
6	1	56.5	16			755.645
7	3	64	16	1151	1373	460.088
8	2	96.5	16	1780		894.572
9	1	94.2	16			502.435
10	1	69.1	16			554.028
11	2	67.8	16	1484		375.011
12	2	96.5	16	1866		452.754
13	1	71.1	16			784.077

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	72.3	8	1382		560.992
2	2	99.4	8	1132		661.93
3	2	71.7	8	1201		353.38
4	1	81.1	8			1083.33
5	2	62	8	1479		985.67
6	2	91.6	8	1014		889.11
7	2	88.5	8	1701		854.65
8	2	74.4	8	1288		196.89
9	2	67	8	1261		6.12
10	2	83.9	8	1193		678.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	75.6	8	1844		39.049
2	3	80.8	8	1324	1085	965.891
3	3	66.5	8	1610	1693	940.232
4	3	90	8	1929	1527	354.653
5	3	85.2	8	1188	1481	945.304
6	1	99.1	8			858.015
7	1	52.6	8			186.025
8	1	66.3	8			324.126
9	2	50	8	1865		803.747
10	1	61.4	8			589.118
11	3	82	8	1890	1930	599.209

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	73.1	11	1010		403.876
2	1	99.6	11			458.001
3	2	63.3	11	1219		544.162
4	1	57	11			453.323
5	2	97.9	11	1980		512.364
6	2	97.7	11	1983		465.365
7	2	93.1	11	1016		386.236
8	2	92.7	11	1683		379.887
9	1	52	11			312.228
10	3	63.7	11	1687	1927	535.339
11	2	74.7	11	1581		595.511
12	3	60.2	11	1285	1240	247.462
13	1	95.5	11			232.443
14	2	61.4	11	1976		219.154
15	2	78.6	11	1389		604.825
16	2	82.2	11	1571		418.096
17	2	70.8	11	1876		280.637
18	3	92.2	11	1754	1690	499.158
19	2	64.1	11	1796		168.779

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	63.9	15	1849		313.181
2	2	94.8	15	1266		273.863
3	2	98.1	15	1959		397.956
4	2	67.9	15	1539		437.129
5	2	63.7	15	1496		522.902
6	2	71.1	15	1078		58.005
7	2	98.9	15	1056		700.168
8	2	84.7	15	1317		86.792
9	2	70.5	15	1635		198.285
10	2	62.2	15	1539		889.248
11	3	53.9	15	1548	1952	574.511
12	1	71.7	15			224.654
13	2	51	15	1490		40.377

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	90.8	8	1942		801.761
2	1	64	8			73.83
3	2	67.8	8	1370		531.55
4	2	99.4	8	1204		174.88
5	1	90.9	8			957.03
6	3	81.9	8	1066	1749	608.55
7	2	82.9	8	1636		13.59
8	3	88.7	8	1698	1712	142.11
9	2	70	8	1727		344.64
10	2	64.1	8	1944		383.87
11	3	65.9	8	1934	1527	236.7
12	2	89.7	8	1094		327.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	73.3	18			314.416
2	3	75.4	18	1297	1097	48.828
3	2	89.6	18	1280		305
4	3	87	18	1529	1632	205.41
5	1	65.1	18			253.7
6	2	98.4	18	1550		733.21
7	1	79.2	18			489.91
8	1	60.5	18			599.63
9	1	68.2	18			632.8
10	2	92.8	18	1268		711.93
11	2	79.6	18	1078		348.25
12	3	75.4	18	1891	1181	6.14
13	2	67.7	18	1919		485.6
14	2	75.6	18	1292		557.8
15	1	91.8	18			41.4

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	64.8	12	1647		592.798
2	1	67.9	12			690.231
3	3	55.6	12	1458	1765	675.612
4	3	83.8	12	1458	1697	721.393
5	3	51.8	12	1689	1222	472.624
6	1	54.9	12			687.465
7	2	53	12	1468		448.485
8	3	95.2	12	1452	1775	280.496
9	3	55.4	12	1815	1216	606.767
10	3	80.4	12	1783	1896	227.518
11	2	97.7	12	1826		401.309

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	72	13	1171		205.148
2	2	75.1	13	1927		197.577
3	3	62.1	13	1460	1701	807.674
4	2	54.6	13	1210		365.831
5	2	58.7	13	1757		470.879
6	3	85.2	13	1449	1670	842.046
7	2	97.2	13	1419		466.273
8	2	60.8	13	1253		283.83
9	2	53.7	13	1473		310.777
10	2	74.6	13	1361		257.064
11	3	78.8	13	1805	1310	132.311
12	2	69	13	1018		373.959
13	2	62.1	13	1937		776.886
14	3	84	13	1615	1199	19.743

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	67.4	13			141.254
2	2	56.4	13	1005		808.417
3	2	82.6	13	1135		366.004
4	3	57.9	13	1706	1300	322.971
5	2	54.8	13	1174		521.479
6	1	63.9	13			479.446
7	1	85.7	13			631.273
8	1	97.3	13			0.31
9	2	54.3	13	1063		541.537
10	2	94.8	13	1707		308.814
11	2	59.8	13	1954		255.581
12	3	59.9	13	1480	1764	381.579
13	3	54.4	13	1065	1500	225.086
14	2	81.8	13	1098		351.043

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	86.1	7			775.051
2	2	76.4	7	1941		487.067
3	1	56	7			418.124
4	3	82.8	7	1669	1356	136.591
5	1	98.5	7			90.119
6	1	62.3	7			100.556
7	2	97.2	7	1926		575.653
8	2	76	7	1608		664.46
9	2	85.5	7	1390		606.107
10	2	87.9	7	1172		680.654
11	2	61.4	7	1073		391.961
12	1	95.5	7			6.919
13	1	73.2	7			754.186
14	2	95.1	7	1783		454.643

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	50.5	7			394.64
2	2	52.4	7	1308		657.863
3	1	80.2	7			373.597
4	2	85.5	7	1421		200.87
5	2	73.2	7	1177		398.213
6	1	81.5	7			643.357
7	2	63.9	7	1831		225.37
8	3	74.7	7	1896	1418	26.573
9	1	83.9	7			276.417
10	1	78.4	7			114.94
11	2	52.3	7	1202		329.283
12	1	57.6	7			20.507
13	1	69.6	7			428.77
14	2	93.1	7	1233		62.903
15	1	96.8	7			42.597
16	3	94.9	7	1150	1024	416
17	2	61.1	7	1253		107.933
18	1	82	7			413.367

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	64.4	16			523.367
2	2	77.6	16	1033		33.932
3	3	95.5	16	1221	1841	588.58
4	2	51.8	16	1117		267.76
5	2	63.1	16	1326		718.8
6	2	94.6	16	1427		127.65
7	1	87.6	16			677
8	1	59.5	16			643.86
9	1	83.4	16			565.89
10	3	58.5	16	1120	1494	345.78
11	2	96.1	16	1033		516.03
12	1	92.7	16			262.38
13	1	54.4	16			219.66
14	3	72.1	16	1193	1384	42.89
15	2	93.5	16	1215		494.2
16	2	80.6	16	1808		356.8

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	91.3	9	1441		57.544
2	3	67.6	9	1166	1916	414.131
3	3	58.8	9	1441	1982	43.992
4	3	96	9	1365	1324	928.653
5	1	67	9			292.604
6	3	97.5	9	1243	1438	295.665
7	2	66.5	9	1970		654.695
8	3	68.6	9	1313	1358	199.336
9	2	81.7	9	1797		260.587
10	1	53	9			886.018
11	2	72.6	9	1695		176.309

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	65.1	5			105.717
2	2	72.9	5	1810		158.557
3	2	87.6	5	1650		657.654
4	2	77.4	5	1632		218.101
5	2	65.4	5	1731		138.419
6	3	74.7	5	1054	1750	797.696
7	2	70.5	5	1229		58.373
8	1	51.3	5			652.19
9	2	89.5	5	1861		625.087
10	2	74.8	5	1121		31.104
11	2	51.9	5	1553		182.721
12	1	80.5	5			131.709
13	2	50.5	5	1004		296.386
14	2	81.7	5	1936		156.743

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	78.1	9	1021		315.617
2	2	94.1	9	1342		189.057
3	3	89.6	9	1662	1726	80.582
4	2	91	9	1868		122.533
5	3	69.5	9	1757	1002	161.804
6	2	73.8	9	1258		59.575
7	2	91	9	1570		0.456
8	2	67.5	9	1087		262.387
9	2	98.6	9	1856		287.048
10	2	83.6	9	1143		305.489
11	3	50.8	9	1204	1391	27.551
12	2	61.2	9	1682		570.972
13	2	83.4	9	1714		103.813
14	2	58.3	9	1852		516.474
15	2	67.9	9	1764		257.395
16	1	90.6	9			101.856
17	1	69.6	9			77.337
18	3	52.7	9	1201	1483	94.758
19	1	75.3	9			592.579

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	60.2	12	1207		552.38
2	2	90.5	12	1551		523.451
3	2	98.4	12	1400		479.542
4	2	88.6	12	1365		161.313
5	1	72.5	12			544.204
6	1	88.3	12			16.905
7	2	53.6	12	1667		578.436
8	2	58	12	1213		595.127
9	3	69.4	12	1679	1726	147.778
10	3	58.5	12	1843	1618	541.159
11	2	94.4	12	1140		159.291
12	1	70.6	12			246.092
13	2	83	12	1361		472.453
14	3	97.9	12	1900	1039	71.654
15	2	98.7	12	1041		485.075
16	3	73.6	12	1975	1392	136.416
17	1	81.8	12			84.937
18	1	54.5	12			179.358
19	2	86.4	12	1444		164.279

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	82.6	7	1134		1004.67
2	3	52.9	7	1728	1078	365.221
3	3	51.5	7	1176	1682	271.652
4	1	86.8	7			204.473
5	2	99.6	7	1112		798.784
6	2	72.2	7	1834		471.625
7	2	70.9	7	1817		792.745
8	3	77.7	7	1450	1886	251.766
9	1	91.7	7			970.797
10	2	76.1	7	1257		243.718
11	2	53.3	7	1433		270.809

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 10

[illegible]

--

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Transmit (802.11ax-160 MHz)
 Test Date : 2023/04/20

Center Freq: 5570MHz				Low Edge: 5492MHz	High Edge: 5649MHz
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	13		5570	Statistical_Check_RandParm_For_Radar_Type_5_1_trail	1
2	19		5570	Statistical_Check_RandParm_For_Radar_Type_5_2_trail	1
3	19		5570	Statistical_Check_RandParm_For_Radar_Type_5_3_trail	1
4	10		5570	Statistical_Check_RandParm_For_Radar_Type_5_4_trail	1
5	13		5570	Statistical_Check_RandParm_For_Radar_Type_5_5_trail	1
6	15		5570	Statistical_Check_RandParm_For_Radar_Type_5_6_trail	1
7	18		5570	Statistical_Check_RandParm_For_Radar_Type_5_7_trail	1
8	14		5570	Statistical_Check_RandParm_For_Radar_Type_5_8_trail	1
9	6		5570	Statistical_Check_RandParm_For_Radar_Type_5_9_trail	1
10	8		5570	Statistical_Check_RandParm_For_Radar_Type_5_10_trail	1
11	7	2.8	5494.8	Statistical_Check_RandParm_For_Radar_Type_5_11_trail	0
12	12	4.8	5496.8	Statistical_Check_RandParm_For_Radar_Type_5_12_trail	0
13	19	7.6	5499.6	Statistical_Check_RandParm_For_Radar_Type_5_13_trail	1
14	13	5.2	5497.2	Statistical_Check_RandParm_For_Radar_Type_5_14_trail	1
15	11	4.4	5496.4	Statistical_Check_RandParm_For_Radar_Type_5_15_trail	1
16	12	4.8	5496.8	Statistical_Check_RandParm_For_Radar_Type_5_16_trail	1
17	16	6.4	5498.4	Statistical_Check_RandParm_For_Radar_Type_5_17_trail	0
18	12	4.8	5496.8	Statistical_Check_RandParm_For_Radar_Type_5_18_trail	0
19	14	5.6	5497.6	Statistical_Check_RandParm_For_Radar_Type_5_19_trail	1
20	13	5.2	5497.2	Statistical_Check_RandParm_For_Radar_Type_5_20_trail	0
21	15	6	5643	Statistical_Check_RandParm_For_Radar_Type_5_21_trail	1
22	13	5.2	5643.8	Statistical_Check_RandParm_For_Radar_Type_5_22_trail	1
23	5	2	5647	Statistical_Check_RandParm_For_Radar_Type_5_23_trail	1
24	19	7.6	5641.4	Statistical_Check_RandParm_For_Radar_Type_5_24_trail	1
25	17	6.8	5642.2	Statistical_Check_RandParm_For_Radar_Type_5_25_trail	1
26	19	7.6	5641.4	Statistical_Check_RandParm_For_Radar_Type_5_26_trail	1
27	5	2	5647	Statistical_Check_RandParm_For_Radar_Type_5_27_trail	1
28	14	5.6	5643.4	Statistical_Check_RandParm_For_Radar_Type_5_28_trail	1
29	16	6.4	5642.6	Statistical_Check_RandParm_For_Radar_Type_5_29_trail	1
30	5	2	5647	Statistical_Check_RandParm_For_Radar_Type_5_30_trail	1
Detection Percentage (%)					83.33
Limit					≥ 80

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	60.1	13	1271		570.111
2	3	69.6	13	1145	1092	801.67
3	3	90.9	13	1415	1408	708.07
4	2	92.6	13	1421		15.53
5	3	83.1	13	1276	1293	342.22
6	2	64.4	13	1042		422.12
7	3	60.7	13	1465	1299	190.21
8	3	82	13	1131	1275	670.23
9	3	68.8	13	1908	1998	855.6
10	2	72.1	13	1699		733.36
11	1	57	13			563.4
12	2	62.4	13	1847		526.4

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	82.5	19	1490		659.851
2	1	56.3	19			653.283
3	2	79.9	19	1644		429.097
4	2	61.6	19	1767		410.95
5	2	64.4	19	1806		294.373
6	3	69.3	19	1466	1674	466.357
7	2	75.6	19	1495		192.06
8	2	77.9	19	1763		161.453
9	3	66.6	19	1749	1117	182.167
10	2	56.2	19	1128		285.56
11	2	65.9	19	1035		481.753
12	1	52.1	19			11.007
13	3	98.6	19	1332	1151	299.44
14	2	63.6	19	1122		253.373
15	1	82.1	19			413.387
16	1	90.4	19			71
17	2	90.1	19	1451		549.833
18	3	50.4	19	1714	1014	117.367

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	61.6	19	1424		47.252
2	3	93.3	19	1860	1063	246.727
3	2	92.8	19	1253		34.144
4	1	84.5	19			342.531
5	1	64.8	19			606.059
6	1	96.5	19			63.186
7	1	54.8	19			372.523
8	2	69	19	1786		192.68
9	2	66.2	19	1170		153.327
10	3	83.9	19	1273	1211	825.164
11	2	73	19	1802		287.531
12	1	56.3	19			436.809
13	1	86.2	19			342.186
14	2	92.3	19	1227		686.443

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	78.9	10	1890		400.548
2	2	86.4	10	1639		447.048
3	2	50.9	10	1686		185.875
4	3	94	10	1241	1820	9.983
5	1	88.4	10			197.391
6	2	75.6	10	1659		184.508
7	2	70.1	10	1233		394.666
8	2	99.1	10	1521		290.124
9	1	85.7	10			421.071
10	2	96.1	10	1925		477.159
11	2	60.5	10	1879		643.916
12	1	66	10			347.314
13	2	69.3	10	1827		125.152
14	1	63	10			172.549
15	1	94.3	10			288.847
16	2	79	10	1642		199.165
17	3	86.8	10	1471	1240	567.582

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	61.1	13			187.544
2	3	92.7	13	1600	1412	440.021
3	2	83.1	13	1346		420.782
4	2	88.2	13	1216		57.213
5	2	52.5	13	1418		294.214
6	2	84.2	13	1876		405.045
7	2	98	13	1477		90.816
8	1	72.9	13			518.497
9	2	77.4	13	1427		252.928
10	2	70.9	13	1985		486.829
11	2	84.5	13	1386		231.991
12	3	83.3	13	1166	1883	594.232
13	2	66.4	13	1101		355.893
14	3	66.9	13	1688	1971	100.364
15	2	95.8	13	1557		73.015
16	2	84.6	13	1056		209.406
17	2	74.7	13	1067		224.437
18	3	60.8	13	1271	1509	346.558
19	2	81.6	13	1409		288.279

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	91.9	18	1502	1081	631.391
2	2	83.7	18	1983		308.893
3	3	52	18	1395	1189	373.607
4	2	93.5	18	1328		54.31
5	2	75.7	18	1754		253.073
6	2	82.4	18	1641		241.147
7	3	52.6	18	1237	1636	139.12
8	2	54	18	1542		31.193
9	2	95.3	18	1511		558.857
10	3	80.3	18	1400	1971	203.84
11	2	56	18	1542		619.083
12	2	55	18	1382		112.557
13	3	64	18	1503	1147	508.6
14	2	92.3	18	1328		381.943
15	2	73.2	18	1005		156.207
16	3	79.3	18	1413	1977	298.1
17	2	54.8	18	1353		307.233
18	1	55.2	18			327.767

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	67.8	14	1204		291.406
2	2	91.9	14	1031		408.787
3	1	74.1	14			303.194
4	3	63.3	14	1321	1766	766.611
5	3	81.1	14	1827	1294	76.719
6	2	79.5	14	1105		518.326
7	1	81.2	14			11.483
8	3	85.2	14	1667	1872	322.35
9	2	89.2	14	1359		669.367
10	2	97.7	14	1699		702.294
11	1	77.3	14			717.241
12	1	58.2	14			565.499
13	1	77.4	14			299.586
14	2	51.5	14	1175		739.543

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	71.7	6	1385	1770	1119.53
2	2	77.1	6	1784		600.24
3	1	50.4	6			496.45
4	2	72.7	6	1456		708.65
5	2	71.3	6	1657		940.88
6	3	84.3	6	1668	1190	610.56
7	2	99.5	6	1684		841.12
8	2	74.1	6	1163		1160.43
9	3	62.4	6	1009	1422	797.4
10	3	90.9	6	1858	1130	104.7

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	84.4	8			598.986
2	2	87.4	8	1313		99.055
3	2	56.4	8	1772		579.874
4	2	80.4	8	1954		167.971
5	2	71	8	1341		114.059
6	2	59.8	8	1401		654.366
7	2	78.2	8	1734		99.373
8	3	71.2	8	1218	1129	615.96
9	2	79.3	8	1044		741.427
10	1	51.6	8			98.884
11	2	74.9	8	1765		487.471
12	3	95.5	8	1830	1092	611.829
13	2	65	8	1535		678.086
14	2	67.4	8	1006		375.843

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	52.2	7			388.118
2	3	89	7	1865	1826	937.59
3	1	75.6	7			761.25
4	1	93.1	7			343.79
5	3	50	7	1108	1898	178.6
6	2	59.8	7	1561		392.99
7	2	54.6	7	1300		621.91
8	2	86	7	1948		556.08
9	1	55.3	7			699.18
10	2	70.7	7	1012		29.72
11	1	91.4	7			233.2
12	1	72.4	7			207

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	88.1	12	1278		774.888
2	1	66.3	12			386.061
3	2	52.3	12	1333		573.352
4	1	83.7	12			90.473
5	3	86.5	12	1226	1566	151.044
6	2	62.5	12	1211		528.595
7	1	60.1	12			227.265
8	2	57	12	1742		853.136
9	2	68.2	12	1574		832.687
10	3	85.9	12	1639	1149	765.118
11	3	54.4	12	1599	1762	221.609

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	50	19	1252		649.045
2	2	59.9	19	1772		606.93
3	1	84.4	19			724.55
4	1	68.6	19			665.51
5	1	86	19			261.78
6	2	99.4	19	1452		390.64
7	2	52.5	19	1118		56.27
8	2	97.1	19	1939		427.94
9	2	76.1	19	1569		548.98
10	3	64.7	19	1570	1867	702.35
11	1	96.7	19			231.12
12	3	88.4	19	1242	1352	450.08
13	2	91.2	19	1879		399.67
14	3	74.7	19	1577	1090	720.3
15	1	61	19			257
16	1	56.7	19			450.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	53	13	1111		709.309
2	1	93.4	13			263.63
3	2	63.1	13	1061		177.22
4	2	67.5	13	1798		514.01
5	1	61.4	13			682.26
6	2	69.4	13	1822		624.14
7	3	85.6	13	1106	1047	171.47
8	3	94.8	13	1279	1466	262.44
9	2	97.1	13	1221		168.28
10	3	60.1	13	1652	1127	673.64
11	2	59.6	13	1728		455.66
12	2	73.8	13	1002		83.4
13	2	99.3	13	1710		4.26
14	2	91.4	13	1738		484.1
15	3	61.5	13	1442	1265	382.4
16	1	80	13			583.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	99.4	11	1664		673.737
2	2	67.6	11	1911		203.947
3	3	58.5	11	1660	1401	5.274
4	1	59.2	11			810.501
5	2	77.2	11	1586		124.979
6	3	60.3	11	1220	1227	830.816
7	3	75.6	11	1265	1023	730.243
8	1	54	11			284.73
9	2	61.5	11	1093		693.147
10	2	54.2	11	1299		518.354
11	2	72.8	11	1140		584.141
12	3	83.3	11	1962	1792	286.339
13	1	56.1	11			570.186
14	2	96.3	11	1605		219.743

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	65	12	1412	1889	109.012
2	2	77.9	12	1658		724.881
3	2	75.7	12	1811		664.852
4	1	62	12			616.683
5	3	67.6	12	1390	1957	311.044
6	3	80.4	12	1829	1935	1012.095
7	3	82.3	12	1039	1882	847.075
8	2	72.9	12	1341		414.396
9	2	70.2	12	1761		126.847
10	2	65.5	12	1216		20.328
11	3	58.3	12	1137	1487	475.209

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	85.2	16	1555	1193	56.698
2	2	55.9	16	1992		282.717
3	3	90.1	16	1086	1899	628.144
4	1	50.4	16			168.061
5	1	68.6	16			574.489
6	1	79.2	16			705.656
7	1	72.8	16			767.823
8	2	78.2	16	1650		815.82
9	2	53.9	16	1305		788.217
10	1	82.6	16			762.544
11	2	60.4	16	1169		694.051
12	3	52.8	16	1934	1679	186.809
13	2	93.3	16	1546		545.986
14	2	65.9	16	1693		832.643

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	90.6	12	1134	1519	283.176
2	3	74.3	12	1766	1211	263.527
3	3	69.9	12	1387	1402	153.574
4	3	51.4	12	1658	1068	727.321
5	2	61.9	12	1464		616.169
6	3	73.3	12	1908	1500	321.676
7	3	93.7	12	1094	1935	31.553
8	3	99.9	12	1305	1493	24.49
9	2	77	12	1277		804.057
10	1	65.2	12			155.874
11	2	67.1	12	1635		430.891
12	3	67.4	12	1485	1302	255.239
13	2	50.5	12	1875		106.286
14	3	77.1	12	1634	1287	212.943

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	65	14	1611		218.363
2	1	91.9	14			206.091
3	2	82.3	14	1651		877.032
4	1	98.6	14			858.643
5	1	79	14			587.994
6	1	63.5	14			1014.775
7	2	58.2	14	1526		875.485
8	3	51.3	14	1804	1016	1015.216
9	1	88.2	14			957.317
10	1	95.5	14			819.118
11	2	56.6	14	1175		969.809

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	50.8	13	1979	1659	319.393
2	2	97.6	13	1531		636.513
3	1	82.5	13			222.536
4	2	78.7	13	1093		676.079
5	3	69.4	13	1796	1201	324.832
6	2	73.8	13	1297		763.745
7	2	69.6	13	1041		448.028
8	3	70.3	13	1548	1346	784.132
9	3	86.8	13	1880	1268	624.735
10	1	89.5	13			807.688
11	2	55.2	13	1993		540.431
12	3	72.6	13	1921	1874	20.054
13	1	98.7	13			483.277

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	55.9	15	1000		317.796
2	2	51.6	15	1655		479.617
3	2	99.4	15	1918		426.403
4	3	81	15	1928	1354	499.11
5	3	92.6	15	1862	1229	395.527
6	1	55.8	15			523.323
7	2	50.4	15	1912		760.83
8	2	71.9	15	1840		196.737
9	2	75.7	15	1920		789.633

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	93	5	1729		107.452
2	3	80.8	5	1016	1376	369.28
3	1	51.5	5			449.47
4	3	88.3	5	1095	1144	672.24
5	2	90.1	5	1526		73.35
6	2	92.6	5	1366		693.62
7	3	85.3	5	1456	1515	373.36
8	3	85.4	5	1978	1814	64.22
9	1	70.8	5			193.54
10	2	99	5	1254		164.27
11	2	85.1	5	1525		614.64
12	2	50.9	5	1470		530.08
13	3	87.8	5	1527	1298	37.63
14	3	91.6	5	1887	1988	742.4
15	3	62.3	5	1777	1349	500.4
16	1	64.9	5			648.7

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	87.5	17	1394		326.001
2	2	82.5	17	1569		575.821
3	3	92.8	17	1829	1259	133.952
4	2	92.7	17	1208		319.793
5	3	89.8	17	1644	1794	125.074
6	2	77.5	17	1014		326.705
7	1	57.1	17			329.616
8	3	92.9	17	1772	1557	289.337
9	3	68.5	17	1294	1200	232.608
10	2	79.6	17	1476		289.859
11	2	94.9	17	1830		142.951
12	2	85.3	17	1156		442.802
13	2	85.6	17	1113		171.013
14	2	71.6	17	1330		509.444
15	3	73.9	17	1070	1254	435.735
16	1	50.6	17			127.336
17	2	72.7	17	1813		222.737
18	3	91.8	17	1088	1499	274.658
19	1	89.3	17			461.379

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	73.2	5	1316		146.929
2	1	88.3	5			79.075
3	2	63.3	5	1212		100.505
4	1	69	5			342.463
5	3	60.8	5	1633	1504	36.711
6	2	51.3	5	1760		152.038
7	2	87.2	5	1583		520.546
8	2	97.8	5	1348		555.844
9	1	69.1	5			13.301
10	2	91.6	5	1478		656.649
11	3	50.5	5	1218	1227	134.726
12	2	82.3	5	1674		573.084
13	2	61.6	5	1910		185.232
14	2	72.2	5	1976		459.409
15	1	94.7	5			689.547
16	3	80.8	5	1673	1845	477.565
17	3	54.3	5	1608	1400	270.982

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	63.1	14	1096	1315	117.99
2	2	51.2	14	1784		704.591
3	3	50.7	14	1066	1670	356.592
4	2	51.1	14	1405		158.993
5	2	80.6	14	1434		360.494
6	1	84	14			818.555
7	3	59	14	1669	1444	989.595
8	3	72.1	14	1737	1182	684.866
9	1	59.1	14			1047.577
10	3	62.7	14	1826	1215	820.818
11	3	65.5	14	1269	1154	38.909

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	91.3	16	1055		864.768
2	2	62.5	16	1853		609.82
3	2	94.2	16	1079		443.48
4	2	56.4	16	1000		110.55
5	2	85.4	16	1245		125.7
6	2	72.2	16	1231		444.36
7	2	90.9	16	1017		372.72
8	2	96.3	16	1666		301.5
9	3	88.1	16	1901	1144	662.85
10	2	74.1	16	1377		823.49
11	1	78.1	16			586.2
12	2	60.4	16	1999		195.4

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 9

[illegible]

--

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Transmit (802.11ax-20 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	0
14	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	0
29	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			93.33
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.577	20	
2	5.5	5.426	20	
3	5.5	5.418	20	
4	5.5	5.462	20	
5	5.5	5.51	20	*
6	5.5	5.636	20	
7	5.5	5.357	20	
8	5.5	5.465	20	
9	5.5	5.387	20	
10	5.5	5.37	20	
11	5.5	5.602	20	
12	5.5	5.642	20	
13	5.5	5.664	20	
14	5.5	5.721	20	
15	5.5	5.718	20	
16	5.5	5.585	20	
17	5.5	5.343	20	
18	5.5	5.61	20	
19	5.5	5.566	20	
20	5.5	5.516	20	
21	5.5	5.611	20	
22	5.5	5.26	20	
23	5.5	5.294	20	
24	5.5	5.306	20	
25	5.5	5.341	20	
26	5.5	5.626	20	
27	5.5	5.415	20	
28	5.5	5.463	20	
29	5.5	5.408	20	
30	5.5	5.301	20	
31	5.5	5.391	20	
32	5.5	5.417	20	
33	5.5	5.686	20	
34	5.5	5.286	20	
35	5.5	5.627	20	
36	5.5	5.656	20	
37	5.5	5.438	20	
38	5.5	5.562	20	
39	5.5	5.648	20	
40	5.5	5.674	20	
41	5.5	5.614	20	
42	5.5	5.431	20	
43	5.5	5.594	20	
44	5.5	5.633	20	
45	5.5	5.618	20	
46	5.5	5.287	20	
47	5.5	5.584	20	
48	5.5	5.468	20	
49	5.5	5.631	20	

50	5.5	5.622	20	
51	5.5	5.676	20	
52	5.5	5.521	20	
53	5.5	5.493	20	*
54	5.5	5.273	20	
55	5.5	5.714	20	
56	5.5	5.563	20	
57	5.5	5.422	20	
58	5.5	5.303	20	
59	5.5	5.379	20	
60	5.5	5.255	20	
61	5.5	5.436	20	
62	5.5	5.293	20	
63	5.5	5.536	20	
64	5.5	5.505	20	*
65	5.5	5.624	20	
66	5.5	5.338	20	
67	5.5	5.515	20	
68	5.5	5.599	20	
69	5.5	5.531	20	
70	5.5	5.466	20	
71	5.5	5.298	20	
72	5.5	5.561	20	
73	5.5	5.702	20	
74	5.5	5.583	20	
75	5.5	5.477	20	
76	5.5	5.491	20	*
77	5.5	5.318	20	
78	5.5	5.67	20	
79	5.5	5.354	20	
80	5.5	5.449	20	
81	5.5	5.397	20	
82	5.5	5.333	20	
83	5.5	5.289	20	
84	5.5	5.632	20	
85	5.5	5.568	20	
86	5.5	5.35	20	
87	5.5	5.265	20	
88	5.5	5.69	20	
89	5.5	5.396	20	
90	5.5	5.31	20	
91	5.5	5.503	20	*
92	5.5	5.593	20	
93	5.5	5.724	20	
94	5.5	5.554	20	
95	5.5	5.617	20	
96	5.5	5.698	20	
97	5.5	5.276	20	
98	5.5	5.457	20	
99	5.5	5.329	20	
100	5.5	5.654	20	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.395	20	
2	5.5	5.654	20	
3	5.5	5.376	20	
4	5.5	5.355	20	
5	5.5	5.43	20	
6	5.5	5.577	20	
7	5.5	5.304	20	
8	5.5	5.523	20	
9	5.5	5.506	20	*
10	5.5	5.526	20	
11	5.5	5.432	20	
12	5.5	5.399	20	
13	5.5	5.649	20	
14	5.5	5.424	20	
15	5.5	5.428	20	
16	5.5	5.72	20	
17	5.5	5.274	20	
18	5.5	5.666	20	
19	5.5	5.501	20	*
20	5.5	5.273	20	
21	5.5	5.697	20	
22	5.5	5.333	20	
23	5.5	5.617	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.442	20	
2	5.5	5.345	20	
3	5.5	5.348	20	
4	5.5	5.529	20	
5	5.5	5.472	20	
6	5.5	5.476	20	
7	5.5	5.651	20	
8	5.5	5.536	20	
9	5.5	5.478	20	
10	5.5	5.711	20	
11	5.5	5.313	20	
12	5.5	5.502	20	*
13	5.5	5.451	20	
14	5.5	5.557	20	
15	5.5	5.373	20	
16	5.5	5.591	20	
17	5.5	5.662	20	
18	5.5	5.595	20	
19	5.5	5.56	20	
20	5.5	5.629	20	
21	5.5	5.359	20	
22	5.5	5.354	20	
23	5.5	5.556	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.263	20	
2	5.5	5.573	20	
3	5.5	5.301	20	
4	5.5	5.541	20	
5	5.5	5.678	20	
6	5.5	5.706	20	
7	5.5	5.254	20	
8	5.5	5.641	20	
9	5.5	5.265	20	
10	5.5	5.464	20	
11	5.5	5.426	20	
12	5.5	5.367	20	
13	5.5	5.656	20	
14	5.5	5.442	20	
15	5.5	5.279	20	
16	5.5	5.323	20	
17	5.5	5.28	20	
18	5.5	5.699	20	
19	5.5	5.694	20	
20	5.5	5.65	20	
21	5.5	5.25	20	
22	5.5	5.44	20	
23	5.5	5.477	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.683	20	
2	5.5	5.364	20	
3	5.5	5.41	20	
4	5.5	5.354	20	
5	5.5	5.689	20	
6	5.5	5.311	20	
7	5.5	5.316	20	
8	5.5	5.638	20	
9	5.5	5.564	20	
10	5.5	5.371	20	
11	5.5	5.613	20	
12	5.5	5.505	20	*
13	5.5	5.385	20	
14	5.5	5.401	20	
15	5.5	5.264	20	
16	5.5	5.44	20	
17	5.5	5.518	20	
18	5.5	5.379	20	
19	5.5	5.677	20	
20	5.5	5.563	20	
21	5.5	5.565	20	
22	5.5	5.67	20	
23	5.5	5.511	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.607	20	
2	5.5	5.608	20	
3	5.5	5.688	20	
4	5.5	5.699	20	
5	5.5	5.686	20	
6	5.5	5.437	20	
7	5.5	5.257	20	
8	5.5	5.299	20	
9	5.5	5.634	20	
10	5.5	5.429	20	
11	5.5	5.289	20	
12	5.5	5.46	20	
13	5.5	5.361	20	
14	5.5	5.365	20	
15	5.5	5.393	20	
16	5.5	5.447	20	
17	5.5	5.282	20	
18	5.5	5.31	20	
19	5.5	5.586	20	
20	5.5	5.317	20	
21	5.5	5.331	20	
22	5.5	5.414	20	
23	5.5	5.708	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.438	20	
2	5.5	5.473	20	
3	5.5	5.276	20	
4	5.5	5.465	20	
5	5.5	5.492	20	*
6	5.5	5.487	20	
7	5.5	5.71	20	
8	5.5	5.693	20	
9	5.5	5.532	20	
10	5.5	5.508	20	*
11	5.5	5.468	20	
12	5.5	5.301	20	
13	5.5	5.51	20	*
14	5.5	5.475	20	
15	5.5	5.375	20	
16	5.5	5.631	20	
17	5.5	5.507	20	*
18	5.5	5.399	20	
19	5.5	5.69	20	
20	5.5	5.308	20	
21	5.5	5.294	20	
22	5.5	5.328	20	
23	5.5	5.267	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.261	20	
2	5.5	5.425	20	
3	5.5	5.371	20	
4	5.5	5.254	20	
5	5.5	5.45	20	
6	5.5	5.692	20	
7	5.5	5.332	20	
8	5.5	5.366	20	
9	5.5	5.713	20	
10	5.5	5.266	20	
11	5.5	5.367	20	
12	5.5	5.383	20	
13	5.5	5.548	20	
14	5.5	5.284	20	
15	5.5	5.387	20	
16	5.5	5.526	20	
17	5.5	5.63	20	
18	5.5	5.461	20	
19	5.5	5.534	20	
20	5.5	5.358	20	
21	5.5	5.683	20	
22	5.5	5.279	20	
23	5.5	5.295	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.333	20	
2	5.5	5.456	20	
3	5.5	5.515	20	
4	5.5	5.34	20	
5	5.5	5.311	20	
6	5.5	5.648	20	
7	5.5	5.616	20	
8	5.5	5.345	20	
9	5.5	5.369	20	
10	5.5	5.528	20	
11	5.5	5.629	20	
12	5.5	5.355	20	
13	5.5	5.381	20	
14	5.5	5.301	20	
15	5.5	5.316	20	
16	5.5	5.357	20	
17	5.5	5.326	20	
18	5.5	5.598	20	
19	5.5	5.56	20	
20	5.5	5.686	20	
21	5.5	5.682	20	
22	5.5	5.605	20	
23	5.5	5.672	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.609	20	
2	5.5	5.589	20	
3	5.5	5.405	20	
4	5.5	5.354	20	
5	5.5	5.65	20	
6	5.5	5.429	20	
7	5.5	5.513	20	
8	5.5	5.533	20	
9	5.5	5.398	20	
10	5.5	5.629	20	
11	5.5	5.575	20	
12	5.5	5.587	20	
13	5.5	5.627	20	
14	5.5	5.557	20	
15	5.5	5.389	20	
16	5.5	5.634	20	
17	5.5	5.6	20	
18	5.5	5.415	20	
19	5.5	5.512	20	
20	5.5	5.488	20	
21	5.5	5.54	20	
22	5.5	5.404	20	
23	5.5	5.623	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.654	20	
2	5.5	5.331	20	
3	5.5	5.291	20	
4	5.5	5.259	20	
5	5.5	5.478	20	
6	5.5	5.432	20	
7	5.5	5.269	20	
8	5.5	5.59	20	
9	5.5	5.467	20	
10	5.5	5.677	20	
11	5.5	5.527	20	
12	5.5	5.461	20	
13	5.5	5.44	20	
14	5.5	5.381	20	
15	5.5	5.507	20	*
16	5.5	5.609	20	
17	5.5	5.377	20	
18	5.5	5.366	20	
19	5.5	5.315	20	
20	5.5	5.544	20	
21	5.5	5.644	20	
22	5.5	5.418	20	
23	5.5	5.365	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.337	20	
2	5.5	5.411	20	
3	5.5	5.383	20	
4	5.5	5.365	20	
5	5.5	5.254	20	
6	5.5	5.619	20	
7	5.5	5.469	20	
8	5.5	5.444	20	
9	5.5	5.539	20	
10	5.5	5.677	20	
11	5.5	5.291	20	
12	5.5	5.443	20	
13	5.5	5.369	20	
14	5.5	5.577	20	
15	5.5	5.531	20	
16	5.5	5.611	20	
17	5.5	5.364	20	
18	5.5	5.416	20	
19	5.5	5.53	20	
20	5.5	5.289	20	
21	5.5	5.419	20	
22	5.5	5.412	20	
23	5.5	5.607	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.4	20	
2	5.5	5.417	20	
3	5.5	5.564	20	
4	5.5	5.291	20	
5	5.5	5.272	20	
6	5.5	5.643	20	
7	5.5	5.42	20	
8	5.5	5.335	20	
9	5.5	5.476	20	
10	5.5	5.563	20	
11	5.5	5.453	20	
12	5.5	5.714	20	
13	5.5	5.285	20	
14	5.5	5.553	20	
15	5.5	5.368	20	
16	5.5	5.616	20	
17	5.5	5.69	20	
18	5.5	5.359	20	
19	5.5	5.339	20	
20	5.5	5.457	20	
21	5.5	5.392	20	
22	5.5	5.257	20	
23	5.5	5.264	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.657	20	
2	5.5	5.56	20	
3	5.5	5.322	20	
4	5.5	5.436	20	
5	5.5	5.424	20	
6	5.5	5.274	20	
7	5.5	5.608	20	
8	5.5	5.465	20	
9	5.5	5.63	20	
10	5.5	5.51	20	*
11	5.5	5.604	20	
12	5.5	5.413	20	
13	5.5	5.333	20	
14	5.5	5.661	20	
15	5.5	5.622	20	
16	5.5	5.341	20	
17	5.5	5.619	20	
18	5.5	5.393	20	
19	5.5	5.721	20	
20	5.5	5.39	20	
21	5.5	5.723	20	
22	5.5	5.291	20	
23	5.5	5.582	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.311	20	
2	5.5	5.359	20	
3	5.5	5.569	20	
4	5.5	5.326	20	
5	5.5	5.418	20	
6	5.5	5.56	20	
7	5.5	5.598	20	
8	5.5	5.538	20	
9	5.5	5.399	20	
10	5.5	5.715	20	
11	5.5	5.521	20	
12	5.5	5.496	20	*
13	5.5	5.665	20	
14	5.5	5.348	20	
15	5.5	5.27	20	
16	5.5	5.44	20	
17	5.5	5.254	20	
18	5.5	5.347	20	
19	5.5	5.336	20	
20	5.5	5.428	20	
21	5.5	5.253	20	
22	5.5	5.364	20	
23	5.5	5.407	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.504	20	*
2	5.5	5.662	20	
3	5.5	5.311	20	
4	5.5	5.702	20	
5	5.5	5.7	20	
6	5.5	5.615	20	
7	5.5	5.393	20	
8	5.5	5.534	20	
9	5.5	5.65	20	
10	5.5	5.386	20	
11	5.5	5.325	20	
12	5.5	5.467	20	
13	5.5	5.551	20	
14	5.5	5.337	20	
15	5.5	5.446	20	
16	5.5	5.313	20	
17	5.5	5.568	20	
18	5.5	5.32	20	
19	5.5	5.545	20	
20	5.5	5.457	20	
21	5.5	5.286	20	
22	5.5	5.664	20	
23	5.5	5.473	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.437	20	
2	5.5	5.69	20	
3	5.5	5.499	20	*
4	5.5	5.43	20	
5	5.5	5.599	20	
6	5.5	5.29	20	
7	5.5	5.633	20	
8	5.5	5.719	20	
9	5.5	5.422	20	
10	5.5	5.467	20	
11	5.5	5.457	20	
12	5.5	5.327	20	
13	5.5	5.54	20	
14	5.5	5.624	20	
15	5.5	5.47	20	
16	5.5	5.359	20	
17	5.5	5.315	20	
18	5.5	5.335	20	
19	5.5	5.347	20	
20	5.5	5.505	20	*
21	5.5	5.592	20	
22	5.5	5.358	20	
23	5.5	5.507	20	*

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.591	20	
2	5.5	5.547	20	
3	5.5	5.448	20	
4	5.5	5.638	20	
5	5.5	5.294	20	
6	5.5	5.592	20	
7	5.5	5.652	20	
8	5.5	5.263	20	
9	5.5	5.278	20	
10	5.5	5.434	20	
11	5.5	5.526	20	
12	5.5	5.524	20	
13	5.5	5.514	20	
14	5.5	5.577	20	
15	5.5	5.53	20	
16	5.5	5.388	20	
17	5.5	5.539	20	
18	5.5	5.556	20	
19	5.5	5.31	20	
20	5.5	5.665	20	
21	5.5	5.642	20	
22	5.5	5.338	20	
23	5.5	5.362	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.43	20	
2	5.5	5.475	20	
3	5.5	5.561	20	
4	5.5	5.574	20	
5	5.5	5.431	20	
6	5.5	5.465	20	
7	5.5	5.457	20	
8	5.5	5.717	20	
9	5.5	5.331	20	
10	5.5	5.505	20	*
11	5.5	5.608	20	
12	5.5	5.588	20	
13	5.5	5.32	20	
14	5.5	5.548	20	
15	5.5	5.685	20	
16	5.5	5.444	20	
17	5.5	5.697	20	
18	5.5	5.611	20	
19	5.5	5.721	20	
20	5.5	5.287	20	
21	5.5	5.402	20	
22	5.5	5.529	20	
23	5.5	5.288	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.656	20	
2	5.5	5.602	20	
3	5.5	5.591	20	
4	5.5	5.633	20	
5	5.5	5.391	20	
6	5.5	5.429	20	
7	5.5	5.281	20	
8	5.5	5.305	20	
9	5.5	5.506	20	*
10	5.5	5.592	20	
11	5.5	5.319	20	
12	5.5	5.546	20	
13	5.5	5.309	20	
14	5.5	5.259	20	
15	5.5	5.48	20	
16	5.5	5.254	20	
17	5.5	5.641	20	
18	5.5	5.654	20	
19	5.5	5.304	20	
20	5.5	5.556	20	
21	5.5	5.39	20	
22	5.5	5.426	20	
23	5.5	5.533	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.517	20	
2	5.5	5.443	20	
3	5.5	5.351	20	
4	5.5	5.313	20	
5	5.5	5.346	20	
6	5.5	5.33	20	
7	5.5	5.363	20	
8	5.5	5.677	20	
9	5.5	5.335	20	
10	5.5	5.341	20	
11	5.5	5.696	20	
12	5.5	5.584	20	
13	5.5	5.659	20	
14	5.5	5.477	20	
15	5.5	5.45	20	
16	5.5	5.552	20	
17	5.5	5.681	20	
18	5.5	5.302	20	
19	5.5	5.693	20	
20	5.5	5.431	20	
21	5.5	5.656	20	
22	5.5	5.437	20	
23	5.5	5.641	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.594	20	
2	5.5	5.369	20	
3	5.5	5.491	20	*
4	5.5	5.47	20	
5	5.5	5.586	20	
6	5.5	5.682	20	
7	5.5	5.52	20	
8	5.5	5.666	20	
9	5.5	5.358	20	
10	5.5	5.492	20	*
11	5.5	5.565	20	
12	5.5	5.523	20	
13	5.5	5.388	20	
14	5.5	5.668	20	
15	5.5	5.469	20	
16	5.5	5.336	20	
17	5.5	5.539	20	
18	5.5	5.298	20	
19	5.5	5.453	20	
20	5.5	5.633	20	
21	5.5	5.602	20	
22	5.5	5.592	20	
23	5.5	5.294	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.668	20	
2	5.5	5.375	20	
3	5.5	5.688	20	
4	5.5	5.594	20	
5	5.5	5.655	20	
6	5.5	5.521	20	
7	5.5	5.32	20	
8	5.5	5.681	20	
9	5.5	5.709	20	
10	5.5	5.673	20	
11	5.5	5.571	20	
12	5.5	5.445	20	
13	5.5	5.561	20	
14	5.5	5.47	20	
15	5.5	5.557	20	
16	5.5	5.61	20	
17	5.5	5.662	20	
18	5.5	5.646	20	
19	5.5	5.378	20	
20	5.5	5.252	20	
21	5.5	5.316	20	
22	5.5	5.558	20	
23	5.5	5.723	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.635	20	
2	5.5	5.7	20	
3	5.5	5.563	20	
4	5.5	5.585	20	
5	5.5	5.441	20	
6	5.5	5.343	20	
7	5.5	5.628	20	
8	5.5	5.388	20	
9	5.5	5.508	20	*
10	5.5	5.372	20	
11	5.5	5.397	20	
12	5.5	5.602	20	
13	5.5	5.377	20	
14	5.5	5.346	20	
15	5.5	5.573	20	
16	5.5	5.517	20	
17	5.5	5.354	20	
18	5.5	5.556	20	
19	5.5	5.582	20	
20	5.5	5.299	20	
21	5.5	5.389	20	
22	5.5	5.426	20	
23	5.5	5.412	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.27	20	
2	5.5	5.352	20	
3	5.5	5.364	20	
4	5.5	5.37	20	
5	5.5	5.263	20	
6	5.5	5.385	20	
7	5.5	5.513	20	
8	5.5	5.508	20	*
9	5.5	5.449	20	
10	5.5	5.692	20	
11	5.5	5.631	20	
12	5.5	5.374	20	
13	5.5	5.36	20	
14	5.5	5.568	20	
15	5.5	5.48	20	
16	5.5	5.643	20	
17	5.5	5.668	20	
18	5.5	5.716	20	
19	5.5	5.258	20	
20	5.5	5.593	20	
21	5.5	5.372	20	
22	5.5	5.318	20	
23	5.5	5.509	20	*

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.315	20	
2	5.5	5.259	20	
3	5.5	5.377	20	
4	5.5	5.718	20	
5	5.5	5.627	20	
6	5.5	5.422	20	
7	5.5	5.3	20	
8	5.5	5.579	20	
9	5.5	5.293	20	
10	5.5	5.323	20	
11	5.5	5.321	20	
12	5.5	5.71	20	
13	5.5	5.684	20	
14	5.5	5.333	20	
15	5.5	5.707	20	
16	5.5	5.564	20	
17	5.5	5.427	20	
18	5.5	5.356	20	
19	5.5	5.642	20	
20	5.5	5.265	20	
21	5.5	5.629	20	
22	5.5	5.338	20	
23	5.5	5.348	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.61	20	
2	5.5	5.517	20	
3	5.5	5.286	20	
4	5.5	5.54	20	
5	5.5	5.538	20	
6	5.5	5.47	20	
7	5.5	5.657	20	
8	5.5	5.36	20	
9	5.5	5.616	20	
10	5.5	5.676	20	
11	5.5	5.295	20	
12	5.5	5.597	20	
13	5.5	5.556	20	
14	5.5	5.369	20	
15	5.5	5.513	20	
16	5.5	5.301	20	
17	5.5	5.709	20	
18	5.5	5.693	20	
19	5.5	5.541	20	
20	5.5	5.256	20	
21	5.5	5.333	20	
22	5.5	5.634	20	
23	5.5	5.446	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.637	20	
2	5.5	5.254	20	
3	5.5	5.722	20	
4	5.5	5.607	20	
5	5.5	5.48	20	
6	5.5	5.68	20	
7	5.5	5.258	20	
8	5.5	5.3	20	
9	5.5	5.701	20	
10	5.5	5.53	20	
11	5.5	5.361	20	
12	5.5	5.346	20	
13	5.5	5.441	20	
14	5.5	5.472	20	
15	5.5	5.429	20	
16	5.5	5.677	20	
17	5.5	5.535	20	
18	5.5	5.582	20	
19	5.5	5.702	20	
20	5.5	5.267	20	
21	5.5	5.553	20	
22	5.5	5.565	20	
23	5.5	5.596	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.653	20	
2	5.5	5.268	20	
3	5.5	5.651	20	
4	5.5	5.404	20	
5	5.5	5.299	20	
6	5.5	5.699	20	
7	5.5	5.368	20	
8	5.5	5.304	20	
9	5.5	5.671	20	
10	5.5	5.381	20	
11	5.5	5.434	20	
12	5.5	5.321	20	
13	5.5	5.383	20	
14	5.5	5.491	20	*
15	5.5	5.341	20	
16	5.5	5.313	20	
17	5.5	5.333	20	
18	5.5	5.39	20	
19	5.5	5.685	20	
20	5.5	5.716	20	
21	5.5	5.442	20	
22	5.5	5.591	20	
23	5.5	5.287	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.674	20	
2	5.5	5.508	20	*
3	5.5	5.389	20	
4	5.5	5.645	20	
5	5.5	5.532	20	
6	5.5	5.698	20	
7	5.5	5.721	20	
8	5.5	5.378	20	
9	5.5	5.447	20	
10	5.5	5.291	20	
11	5.5	5.391	20	
12	5.5	5.557	20	
13	5.5	5.5	20	*
14	5.5	5.268	20	
15	5.5	5.722	20	
16	5.5	5.349	20	
17	5.5	5.48	20	
18	5.5	5.635	20	
19	5.5	5.681	20	
20	5.5	5.489	20	
21	5.5	5.643	20	
22	5.5	5.607	20	
23	5.5	5.282	20	

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Transmit (802.11ax-40 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	0
15	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			96.67
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.298	40	
2	5.51	5.363	40	
3	5.51	5.635	40	
4	5.51	5.548	40	
5	5.51	5.485	40	
6	5.51	5.486	40	
7	5.51	5.597	40	
8	5.51	5.537	40	
9	5.51	5.531	40	
10	5.51	5.55	40	
11	5.51	5.53	40	*
12	5.51	5.455	40	
13	5.51	5.43	40	
14	5.51	5.46	40	
15	5.51	5.712	40	
16	5.51	5.709	40	
17	5.51	5.591	40	
18	5.51	5.609	40	
19	5.51	5.644	40	
20	5.51	5.32	40	
21	5.51	5.656	40	
22	5.51	5.716	40	
23	5.51	5.335	40	
24	5.51	5.255	40	
25	5.51	5.699	40	
26	5.51	5.677	40	
27	5.51	5.528	40	*
28	5.51	5.468	40	
29	5.51	5.341	40	
30	5.51	5.418	40	
31	5.51	5.393	40	
32	5.51	5.71	40	
33	5.51	5.482	40	
34	5.51	5.447	40	
35	5.51	5.397	40	
36	5.51	5.508	40	*
37	5.51	5.471	40	
38	5.51	5.613	40	
39	5.51	5.514	40	*
40	5.51	5.614	40	
41	5.51	5.434	40	
42	5.51	5.542	40	
43	5.51	5.402	40	
44	5.51	5.359	40	
45	5.51	5.387	40	
46	5.51	5.488	40	
47	5.51	5.49	40	*
48	5.51	5.315	40	
49	5.51	5.309	40	

50	5.51	5.355	40	
51	5.51	5.606	40	
52	5.51	5.376	40	
53	5.51	5.293	40	
54	5.51	5.69	40	
55	5.51	5.515	40	*
56	5.51	5.467	40	
57	5.51	5.668	40	
58	5.51	5.375	40	
59	5.51	5.483	40	
60	5.51	5.462	40	
61	5.51	5.274	40	
62	5.51	5.263	40	
63	5.51	5.388	40	
64	5.51	5.694	40	
65	5.51	5.543	40	
66	5.51	5.308	40	
67	5.51	5.325	40	
68	5.51	5.409	40	
69	5.51	5.271	40	
70	5.51	5.675	40	
71	5.51	5.663	40	
72	5.51	5.557	40	
73	5.51	5.499	40	*
74	5.51	5.305	40	
75	5.51	5.539	40	
76	5.51	5.652	40	
77	5.51	5.494	40	*
78	5.51	5.693	40	
79	5.51	5.576	40	
80	5.51	5.275	40	
81	5.51	5.348	40	
82	5.51	5.669	40	
83	5.51	5.297	40	
84	5.51	5.623	40	
85	5.51	5.416	40	
86	5.51	5.567	40	
87	5.51	5.48	40	
88	5.51	5.65	40	
89	5.51	5.269	40	
90	5.51	5.294	40	
91	5.51	5.618	40	
92	5.51	5.415	40	
93	5.51	5.453	40	
94	5.51	5.389	40	
95	5.51	5.626	40	
96	5.51	5.304	40	
97	5.51	5.379	40	
98	5.51	5.491	40	*
99	5.51	5.426	40	
100	5.51	5.638	40	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.307	40	
2	5.51	5.64	40	
3	5.51	5.27	40	
4	5.51	5.416	40	
5	5.51	5.487	40	
6	5.51	5.415	40	
7	5.51	5.422	40	
8	5.51	5.49	40	*
9	5.51	5.418	40	
10	5.51	5.482	40	
11	5.51	5.614	40	
12	5.51	5.708	40	
13	5.51	5.446	40	
14	5.51	5.616	40	
15	5.51	5.655	40	
16	5.51	5.338	40	
17	5.51	5.62	40	
18	5.51	5.558	40	
19	5.51	5.547	40	
20	5.51	5.685	40	
21	5.51	5.478	40	
22	5.51	5.497	40	*
23	5.51	5.523	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.308	40	
2	5.51	5.721	40	
3	5.51	5.555	40	
4	5.51	5.544	40	
5	5.51	5.335	40	
6	5.51	5.596	40	
7	5.51	5.273	40	
8	5.51	5.648	40	
9	5.51	5.372	40	
10	5.51	5.51	40	*
11	5.51	5.6	40	
12	5.51	5.589	40	
13	5.51	5.637	40	
14	5.51	5.564	40	
15	5.51	5.365	40	
16	5.51	5.586	40	
17	5.51	5.654	40	
18	5.51	5.647	40	
19	5.51	5.256	40	
20	5.51	5.258	40	
21	5.51	5.341	40	
22	5.51	5.715	40	
23	5.51	5.577	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.712	40	
2	5.51	5.458	40	
3	5.51	5.497	40	*
4	5.51	5.671	40	
5	5.51	5.564	40	
6	5.51	5.549	40	
7	5.51	5.287	40	
8	5.51	5.708	40	
9	5.51	5.541	40	
10	5.51	5.527	40	*
11	5.51	5.371	40	
12	5.51	5.362	40	
13	5.51	5.283	40	
14	5.51	5.689	40	
15	5.51	5.336	40	
16	5.51	5.67	40	
17	5.51	5.68	40	
18	5.51	5.59	40	
19	5.51	5.286	40	
20	5.51	5.548	40	
21	5.51	5.645	40	
22	5.51	5.468	40	
23	5.51	5.453	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.698	40	
2	5.51	5.458	40	
3	5.51	5.697	40	
4	5.51	5.591	40	
5	5.51	5.708	40	
6	5.51	5.533	40	
7	5.51	5.422	40	
8	5.51	5.584	40	
9	5.51	5.567	40	
10	5.51	5.494	40	*
11	5.51	5.641	40	
12	5.51	5.602	40	
13	5.51	5.497	40	*
14	5.51	5.711	40	
15	5.51	5.563	40	
16	5.51	5.493	40	*
17	5.51	5.56	40	
18	5.51	5.68	40	
19	5.51	5.393	40	
20	5.51	5.293	40	
21	5.51	5.468	40	
22	5.51	5.58	40	
23	5.51	5.645	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.411	40	
2	5.51	5.289	40	
3	5.51	5.709	40	
4	5.51	5.3	40	
5	5.51	5.43	40	
6	5.51	5.616	40	
7	5.51	5.441	40	
8	5.51	5.561	40	
9	5.51	5.625	40	
10	5.51	5.431	40	
11	5.51	5.405	40	
12	5.51	5.667	40	
13	5.51	5.598	40	
14	5.51	5.481	40	
15	5.51	5.701	40	
16	5.51	5.27	40	
17	5.51	5.662	40	
18	5.51	5.63	40	
19	5.51	5.692	40	
20	5.51	5.479	40	
21	5.51	5.601	40	
22	5.51	5.619	40	
23	5.51	5.308	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.664	40	
2	5.51	5.34	40	
3	5.51	5.607	40	
4	5.51	5.567	40	
5	5.51	5.703	40	
6	5.51	5.515	40	*
7	5.51	5.537	40	
8	5.51	5.303	40	
9	5.51	5.512	40	*
10	5.51	5.539	40	
11	5.51	5.25	40	
12	5.51	5.701	40	
13	5.51	5.314	40	
14	5.51	5.689	40	
15	5.51	5.534	40	
16	5.51	5.363	40	
17	5.51	5.276	40	
18	5.51	5.405	40	
19	5.51	5.408	40	
20	5.51	5.366	40	
21	5.51	5.381	40	
22	5.51	5.712	40	
23	5.51	5.418	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.624	40	
2	5.51	5.608	40	
3	5.51	5.469	40	
4	5.51	5.525	40	*
5	5.51	5.7	40	
6	5.51	5.404	40	
7	5.51	5.49	40	*
8	5.51	5.652	40	
9	5.51	5.547	40	
10	5.51	5.546	40	
11	5.51	5.519	40	*
12	5.51	5.494	40	*
13	5.51	5.414	40	
14	5.51	5.38	40	
15	5.51	5.27	40	
16	5.51	5.289	40	
17	5.51	5.621	40	
18	5.51	5.61	40	
19	5.51	5.443	40	
20	5.51	5.558	40	
21	5.51	5.611	40	
22	5.51	5.351	40	
23	5.51	5.709	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.679	40	
2	5.51	5.683	40	
3	5.51	5.355	40	
4	5.51	5.569	40	
5	5.51	5.403	40	
6	5.51	5.436	40	
7	5.51	5.586	40	
8	5.51	5.446	40	
9	5.51	5.303	40	
10	5.51	5.671	40	
11	5.51	5.536	40	
12	5.51	5.537	40	
13	5.51	5.35	40	
14	5.51	5.322	40	
15	5.51	5.46	40	
16	5.51	5.524	40	*
17	5.51	5.718	40	
18	5.51	5.498	40	*
19	5.51	5.572	40	
20	5.51	5.316	40	
21	5.51	5.325	40	
22	5.51	5.503	40	*
23	5.51	5.389	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.706	40	
2	5.51	5.508	40	*
3	5.51	5.541	40	
4	5.51	5.459	40	
5	5.51	5.408	40	
6	5.51	5.597	40	
7	5.51	5.285	40	
8	5.51	5.617	40	
9	5.51	5.584	40	
10	5.51	5.432	40	
11	5.51	5.485	40	
12	5.51	5.618	40	
13	5.51	5.44	40	
14	5.51	5.295	40	
15	5.51	5.547	40	
16	5.51	5.607	40	
17	5.51	5.546	40	
18	5.51	5.556	40	
19	5.51	5.592	40	
20	5.51	5.298	40	
21	5.51	5.283	40	
22	5.51	5.46	40	
23	5.51	5.371	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.367	40	
2	5.51	5.271	40	
3	5.51	5.461	40	
4	5.51	5.661	40	
5	5.51	5.468	40	
6	5.51	5.434	40	
7	5.51	5.394	40	
8	5.51	5.637	40	
9	5.51	5.306	40	
10	5.51	5.616	40	
11	5.51	5.67	40	
12	5.51	5.372	40	
13	5.51	5.254	40	
14	5.51	5.335	40	
15	5.51	5.656	40	
16	5.51	5.328	40	
17	5.51	5.299	40	
18	5.51	5.604	40	
19	5.51	5.602	40	
20	5.51	5.393	40	
21	5.51	5.368	40	
22	5.51	5.579	40	
23	5.51	5.512	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.68	40	
2	5.51	5.414	40	
3	5.51	5.349	40	
4	5.51	5.345	40	
5	5.51	5.511	40	*
6	5.51	5.546	40	
7	5.51	5.385	40	
8	5.51	5.424	40	
9	5.51	5.45	40	
10	5.51	5.252	40	
11	5.51	5.449	40	
12	5.51	5.552	40	
13	5.51	5.518	40	*
14	5.51	5.585	40	
15	5.51	5.431	40	
16	5.51	5.451	40	
17	5.51	5.391	40	
18	5.51	5.578	40	
19	5.51	5.647	40	
20	5.51	5.437	40	
21	5.51	5.584	40	
22	5.51	5.402	40	
23	5.51	5.689	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.335	40	
2	5.51	5.408	40	
3	5.51	5.387	40	
4	5.51	5.612	40	
5	5.51	5.422	40	
6	5.51	5.327	40	
7	5.51	5.588	40	
8	5.51	5.456	40	
9	5.51	5.36	40	
10	5.51	5.505	40	*
11	5.51	5.47	40	
12	5.51	5.286	40	
13	5.51	5.258	40	
14	5.51	5.703	40	
15	5.51	5.576	40	
16	5.51	5.359	40	
17	5.51	5.713	40	
18	5.51	5.718	40	
19	5.51	5.53	40	*
20	5.51	5.436	40	
21	5.51	5.395	40	
22	5.51	5.639	40	
23	5.51	5.457	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.349	40	
2	5.51	5.696	40	
3	5.51	5.454	40	
4	5.51	5.588	40	
5	5.51	5.606	40	
6	5.51	5.466	40	
7	5.51	5.527	40	*
8	5.51	5.45	40	
9	5.51	5.694	40	
10	5.51	5.312	40	
11	5.51	5.472	40	
12	5.51	5.544	40	
13	5.51	5.452	40	
14	5.51	5.49	40	*
15	5.51	5.71	40	
16	5.51	5.346	40	
17	5.51	5.718	40	
18	5.51	5.425	40	
19	5.51	5.651	40	
20	5.51	5.322	40	
21	5.51	5.599	40	
22	5.51	5.497	40	*
23	5.51	5.428	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.329	40	
2	5.51	5.369	40	
3	5.51	5.573	40	
4	5.51	5.682	40	
5	5.51	5.568	40	
6	5.51	5.632	40	
7	5.51	5.718	40	
8	5.51	5.476	40	
9	5.51	5.642	40	
10	5.51	5.409	40	
11	5.51	5.288	40	
12	5.51	5.655	40	
13	5.51	5.68	40	
14	5.51	5.717	40	
15	5.51	5.413	40	
16	5.51	5.61	40	
17	5.51	5.352	40	
18	5.51	5.346	40	
19	5.51	5.658	40	
20	5.51	5.475	40	
21	5.51	5.293	40	
22	5.51	5.454	40	
23	5.51	5.261	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.275	40	
2	5.51	5.684	40	
3	5.51	5.37	40	
4	5.51	5.535	40	
5	5.51	5.423	40	
6	5.51	5.287	40	
7	5.51	5.527	40	*
8	5.51	5.612	40	
9	5.51	5.313	40	
10	5.51	5.643	40	
11	5.51	5.627	40	
12	5.51	5.666	40	
13	5.51	5.629	40	
14	5.51	5.718	40	
15	5.51	5.316	40	
16	5.51	5.291	40	
17	5.51	5.703	40	
18	5.51	5.716	40	
19	5.51	5.633	40	
20	5.51	5.45	40	
21	5.51	5.656	40	
22	5.51	5.348	40	
23	5.51	5.393	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.51	40	*
2	5.51	5.508	40	*
3	5.51	5.632	40	
4	5.51	5.393	40	
5	5.51	5.501	40	*
6	5.51	5.566	40	
7	5.51	5.431	40	
8	5.51	5.505	40	*
9	5.51	5.513	40	*
10	5.51	5.429	40	
11	5.51	5.62	40	
12	5.51	5.453	40	
13	5.51	5.284	40	
14	5.51	5.294	40	
15	5.51	5.282	40	
16	5.51	5.445	40	
17	5.51	5.441	40	
18	5.51	5.558	40	
19	5.51	5.319	40	
20	5.51	5.49	40	*
21	5.51	5.526	40	*
22	5.51	5.647	40	
23	5.51	5.45	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.4	40	
2	5.51	5.464	40	
3	5.51	5.636	40	
4	5.51	5.543	40	
5	5.51	5.256	40	
6	5.51	5.432	40	
7	5.51	5.555	40	
8	5.51	5.67	40	
9	5.51	5.274	40	
10	5.51	5.38	40	
11	5.51	5.259	40	
12	5.51	5.549	40	
13	5.51	5.648	40	
14	5.51	5.255	40	
15	5.51	5.479	40	
16	5.51	5.643	40	
17	5.51	5.655	40	
18	5.51	5.346	40	
19	5.51	5.478	40	
20	5.51	5.681	40	
21	5.51	5.492	40	*
22	5.51	5.436	40	
23	5.51	5.262	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.552	40	
2	5.51	5.251	40	
3	5.51	5.439	40	
4	5.51	5.367	40	
5	5.51	5.681	40	
6	5.51	5.523	40	*
7	5.51	5.303	40	
8	5.51	5.292	40	
9	5.51	5.716	40	
10	5.51	5.404	40	
11	5.51	5.587	40	
12	5.51	5.372	40	
13	5.51	5.597	40	
14	5.51	5.43	40	
15	5.51	5.527	40	*
16	5.51	5.432	40	
17	5.51	5.572	40	
18	5.51	5.624	40	
19	5.51	5.465	40	
20	5.51	5.662	40	
21	5.51	5.281	40	
22	5.51	5.579	40	
23	5.51	5.625	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.456	40	
2	5.51	5.646	40	
3	5.51	5.373	40	
4	5.51	5.316	40	
5	5.51	5.491	40	*
6	5.51	5.701	40	
7	5.51	5.383	40	
8	5.51	5.668	40	
9	5.51	5.409	40	
10	5.51	5.655	40	
11	5.51	5.557	40	
12	5.51	5.616	40	
13	5.51	5.661	40	
14	5.51	5.297	40	
15	5.51	5.376	40	
16	5.51	5.708	40	
17	5.51	5.573	40	
18	5.51	5.5	40	*
19	5.51	5.545	40	
20	5.51	5.422	40	
21	5.51	5.598	40	
22	5.51	5.338	40	
23	5.51	5.254	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.641	40	
2	5.51	5.718	40	
3	5.51	5.579	40	
4	5.51	5.697	40	
5	5.51	5.596	40	
6	5.51	5.657	40	
7	5.51	5.426	40	
8	5.51	5.403	40	
9	5.51	5.341	40	
10	5.51	5.391	40	
11	5.51	5.654	40	
12	5.51	5.719	40	
13	5.51	5.379	40	
14	5.51	5.499	40	*
15	5.51	5.29	40	
16	5.51	5.308	40	
17	5.51	5.624	40	
18	5.51	5.666	40	
19	5.51	5.636	40	
20	5.51	5.268	40	
21	5.51	5.615	40	
22	5.51	5.625	40	
23	5.51	5.595	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.698	40	
2	5.51	5.437	40	
3	5.51	5.287	40	
4	5.51	5.493	40	*
5	5.51	5.355	40	
6	5.51	5.608	40	
7	5.51	5.267	40	
8	5.51	5.427	40	
9	5.51	5.651	40	
10	5.51	5.719	40	
11	5.51	5.638	40	
12	5.51	5.697	40	
13	5.51	5.68	40	
14	5.51	5.578	40	
15	5.51	5.607	40	
16	5.51	5.652	40	
17	5.51	5.534	40	
18	5.51	5.58	40	
19	5.51	5.263	40	
20	5.51	5.654	40	
21	5.51	5.542	40	
22	5.51	5.508	40	*
23	5.51	5.374	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.495	40	*
2	5.51	5.372	40	
3	5.51	5.399	40	
4	5.51	5.619	40	
5	5.51	5.653	40	
6	5.51	5.323	40	
7	5.51	5.627	40	
8	5.51	5.661	40	
9	5.51	5.269	40	
10	5.51	5.625	40	
11	5.51	5.676	40	
12	5.51	5.593	40	
13	5.51	5.673	40	
14	5.51	5.312	40	
15	5.51	5.504	40	*
16	5.51	5.377	40	
17	5.51	5.29	40	
18	5.51	5.47	40	
19	5.51	5.55	40	
20	5.51	5.461	40	
21	5.51	5.457	40	
22	5.51	5.548	40	
23	5.51	5.43	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.329	40	
2	5.51	5.454	40	
3	5.51	5.453	40	
4	5.51	5.325	40	
5	5.51	5.714	40	
6	5.51	5.427	40	
7	5.51	5.611	40	
8	5.51	5.688	40	
9	5.51	5.252	40	
10	5.51	5.662	40	
11	5.51	5.544	40	
12	5.51	5.43	40	
13	5.51	5.664	40	
14	5.51	5.31	40	
15	5.51	5.706	40	
16	5.51	5.289	40	
17	5.51	5.616	40	
18	5.51	5.586	40	
19	5.51	5.6	40	
20	5.51	5.601	40	
21	5.51	5.447	40	
22	5.51	5.338	40	
23	5.51	5.585	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.706	40	
2	5.51	5.558	40	
3	5.51	5.479	40	
4	5.51	5.417	40	
5	5.51	5.702	40	
6	5.51	5.645	40	
7	5.51	5.512	40	*
8	5.51	5.621	40	
9	5.51	5.578	40	
10	5.51	5.569	40	
11	5.51	5.596	40	
12	5.51	5.655	40	
13	5.51	5.465	40	
14	5.51	5.323	40	
15	5.51	5.721	40	
16	5.51	5.688	40	
17	5.51	5.489	40	
18	5.51	5.537	40	
19	5.51	5.475	40	
20	5.51	5.319	40	
21	5.51	5.708	40	
22	5.51	5.626	40	
23	5.51	5.306	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.386	40	
2	5.51	5.419	40	
3	5.51	5.616	40	
4	5.51	5.444	40	
5	5.51	5.325	40	
6	5.51	5.37	40	
7	5.51	5.479	40	
8	5.51	5.574	40	
9	5.51	5.576	40	
10	5.51	5.337	40	
11	5.51	5.399	40	
12	5.51	5.302	40	
13	5.51	5.402	40	
14	5.51	5.651	40	
15	5.51	5.564	40	
16	5.51	5.437	40	
17	5.51	5.641	40	
18	5.51	5.668	40	
19	5.51	5.301	40	
20	5.51	5.604	40	
21	5.51	5.44	40	
22	5.51	5.391	40	
23	5.51	5.339	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.396	40	
2	5.51	5.333	40	
3	5.51	5.325	40	
4	5.51	5.354	40	
5	5.51	5.444	40	
6	5.51	5.395	40	
7	5.51	5.669	40	
8	5.51	5.497	40	*
9	5.51	5.496	40	*
10	5.51	5.543	40	
11	5.51	5.416	40	
12	5.51	5.311	40	
13	5.51	5.265	40	
14	5.51	5.564	40	
15	5.51	5.25	40	
16	5.51	5.67	40	
17	5.51	5.398	40	
18	5.51	5.271	40	
19	5.51	5.272	40	
20	5.51	5.329	40	
21	5.51	5.415	40	
22	5.51	5.671	40	
23	5.51	5.498	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.415	40	
2	5.51	5.411	40	
3	5.51	5.657	40	
4	5.51	5.531	40	
5	5.51	5.558	40	
6	5.51	5.484	40	
7	5.51	5.701	40	
8	5.51	5.586	40	
9	5.51	5.383	40	
10	5.51	5.599	40	
11	5.51	5.341	40	
12	5.51	5.281	40	
13	5.51	5.362	40	
14	5.51	5.429	40	
15	5.51	5.564	40	
16	5.51	5.536	40	
17	5.51	5.72	40	
18	5.51	5.379	40	
19	5.51	5.584	40	
20	5.51	5.306	40	
21	5.51	5.258	40	
22	5.51	5.432	40	
23	5.51	5.525	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.659	40	
2	5.51	5.509	40	*
3	5.51	5.643	40	
4	5.51	5.5	40	*
5	5.51	5.432	40	
6	5.51	5.613	40	
7	5.51	5.618	40	
8	5.51	5.624	40	
9	5.51	5.672	40	
10	5.51	5.7	40	
11	5.51	5.688	40	
12	5.51	5.479	40	
13	5.51	5.558	40	
14	5.51	5.351	40	
15	5.51	5.456	40	
16	5.51	5.655	40	
17	5.51	5.377	40	
18	5.51	5.441	40	
19	5.51	5.488	40	
20	5.51	5.384	40	
21	5.51	5.561	40	
22	5.51	5.53	40	*
23	5.51	5.654	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.502	40	*
2	5.51	5.416	40	
3	5.51	5.718	40	
4	5.51	5.529	40	*
5	5.51	5.585	40	
6	5.51	5.45	40	
7	5.51	5.539	40	
8	5.51	5.318	40	
9	5.51	5.285	40	
10	5.51	5.291	40	
11	5.51	5.376	40	
12	5.51	5.547	40	
13	5.51	5.642	40	
14	5.51	5.664	40	
15	5.51	5.4	40	
16	5.51	5.544	40	
17	5.51	5.695	40	
18	5.51	5.281	40	
19	5.51	5.397	40	
20	5.51	5.486	40	
21	5.51	5.494	40	*
22	5.51	5.317	40	
23	5.51	5.429	40	

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Transmit (802.11ax-80 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	0
9	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	0
24	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			93.33
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.486	80	
2	5.53	5.46	80	
3	5.53	5.613	80	
4	5.53	5.641	80	
5	5.53	5.665	80	
6	5.53	5.595	80	
7	5.53	5.662	80	
8	5.53	5.382	80	
9	5.53	5.45	80	
10	5.53	5.583	80	
11	5.53	5.651	80	
12	5.53	5.479	80	
13	5.53	5.398	80	
14	5.53	5.614	80	
15	5.53	5.309	80	
16	5.53	5.467	80	
17	5.53	5.404	80	
18	5.53	5.498	80	*
19	5.53	5.536	80	*
20	5.53	5.299	80	
21	5.53	5.39	80	
22	5.53	5.499	80	*
23	5.53	5.357	80	
24	5.53	5.313	80	
25	5.53	5.296	80	
26	5.53	5.3	80	
27	5.53	5.505	80	*
28	5.53	5.626	80	
29	5.53	5.419	80	
30	5.53	5.706	80	
31	5.53	5.506	80	*
32	5.53	5.441	80	
33	5.53	5.62	80	
34	5.53	5.603	80	
35	5.53	5.42	80	
36	5.53	5.258	80	
37	5.53	5.64	80	
38	5.53	5.638	80	
39	5.53	5.368	80	
40	5.53	5.682	80	
41	5.53	5.337	80	
42	5.53	5.344	80	
43	5.53	5.274	80	
44	5.53	5.328	80	
45	5.53	5.435	80	
46	5.53	5.339	80	
47	5.53	5.549	80	*
48	5.53	5.643	80	
49	5.53	5.29	80	

50	5.53	5.509	80	*
51	5.53	5.519	80	*
52	5.53	5.327	80	
53	5.53	5.633	80	
54	5.53	5.672	80	
55	5.53	5.436	80	
56	5.53	5.487	80	
57	5.53	5.691	80	
58	5.53	5.375	80	
59	5.53	5.567	80	*
60	5.53	5.397	80	
61	5.53	5.564	80	*
62	5.53	5.455	80	
63	5.53	5.414	80	
64	5.53	5.376	80	
65	5.53	5.576	80	
66	5.53	5.386	80	
67	5.53	5.58	80	
68	5.53	5.582	80	
69	5.53	5.495	80	*
70	5.53	5.54	80	*
71	5.53	5.539	80	*
72	5.53	5.35	80	
73	5.53	5.515	80	*
74	5.53	5.363	80	
75	5.53	5.5	80	*
76	5.53	5.578	80	
77	5.53	5.655	80	
78	5.53	5.443	80	
79	5.53	5.459	80	
80	5.53	5.458	80	
81	5.53	5.31	80	
82	5.53	5.391	80	
83	5.53	5.588	80	
84	5.53	5.426	80	
85	5.53	5.547	80	*
86	5.53	5.364	80	
87	5.53	5.565	80	*
88	5.53	5.347	80	
89	5.53	5.257	80	
90	5.53	5.568	80	*
91	5.53	5.667	80	
92	5.53	5.558	80	*
93	5.53	5.405	80	
94	5.53	5.37	80	
95	5.53	5.698	80	
96	5.53	5.72	80	
97	5.53	5.271	80	
98	5.53	5.431	80	
99	5.53	5.494	80	*
100	5.53	5.677	80	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.529	80	*
2	5.53	5.272	80	
3	5.53	5.605	80	
4	5.53	5.465	80	
5	5.53	5.705	80	
6	5.53	5.569	80	*
7	5.53	5.498	80	*
8	5.53	5.342	80	
9	5.53	5.571	80	
10	5.53	5.494	80	*
11	5.53	5.363	80	
12	5.53	5.624	80	
13	5.53	5.296	80	
14	5.53	5.251	80	
15	5.53	5.469	80	
16	5.53	5.623	80	
17	5.53	5.67	80	
18	5.53	5.58	80	
19	5.53	5.399	80	
20	5.53	5.695	80	
21	5.53	5.405	80	
22	5.53	5.367	80	
23	5.53	5.558	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.649	80	
2	5.53	5.614	80	
3	5.53	5.586	80	
4	5.53	5.481	80	
5	5.53	5.483	80	
6	5.53	5.279	80	
7	5.53	5.303	80	
8	5.53	5.42	80	
9	5.53	5.425	80	
10	5.53	5.499	80	*
11	5.53	5.707	80	
12	5.53	5.391	80	
13	5.53	5.432	80	
14	5.53	5.341	80	
15	5.53	5.316	80	
16	5.53	5.466	80	
17	5.53	5.278	80	
18	5.53	5.346	80	
19	5.53	5.691	80	
20	5.53	5.292	80	
21	5.53	5.702	80	
22	5.53	5.545	80	*
23	5.53	5.367	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.385	80	
2	5.53	5.696	80	
3	5.53	5.428	80	
4	5.53	5.458	80	
5	5.53	5.291	80	
6	5.53	5.653	80	
7	5.53	5.459	80	
8	5.53	5.702	80	
9	5.53	5.674	80	
10	5.53	5.53	80	*
11	5.53	5.689	80	
12	5.53	5.358	80	
13	5.53	5.394	80	
14	5.53	5.48	80	
15	5.53	5.383	80	
16	5.53	5.446	80	
17	5.53	5.288	80	
18	5.53	5.388	80	
19	5.53	5.722	80	
20	5.53	5.41	80	
21	5.53	5.314	80	
22	5.53	5.532	80	*
23	5.53	5.425	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.469	80	
2	5.53	5.683	80	
3	5.53	5.555	80	*
4	5.53	5.287	80	
5	5.53	5.687	80	
6	5.53	5.514	80	*
7	5.53	5.693	80	
8	5.53	5.595	80	
9	5.53	5.368	80	
10	5.53	5.618	80	
11	5.53	5.356	80	
12	5.53	5.706	80	
13	5.53	5.402	80	
14	5.53	5.703	80	
15	5.53	5.293	80	
16	5.53	5.5	80	*
17	5.53	5.329	80	
18	5.53	5.276	80	
19	5.53	5.392	80	
20	5.53	5.645	80	
21	5.53	5.634	80	
22	5.53	5.31	80	
23	5.53	5.471	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.575	80	
2	5.53	5.569	80	*
3	5.53	5.613	80	
4	5.53	5.592	80	
5	5.53	5.325	80	
6	5.53	5.487	80	
7	5.53	5.341	80	
8	5.53	5.397	80	
9	5.53	5.283	80	
10	5.53	5.355	80	
11	5.53	5.52	80	*
12	5.53	5.402	80	
13	5.53	5.514	80	*
14	5.53	5.425	80	
15	5.53	5.723	80	
16	5.53	5.557	80	*
17	5.53	5.376	80	
18	5.53	5.587	80	
19	5.53	5.408	80	
20	5.53	5.667	80	
21	5.53	5.553	80	*
22	5.53	5.335	80	
23	5.53	5.492	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.442	80	
2	5.53	5.575	80	
3	5.53	5.669	80	
4	5.53	5.384	80	
5	5.53	5.398	80	
6	5.53	5.62	80	
7	5.53	5.341	80	
8	5.53	5.257	80	
9	5.53	5.41	80	
10	5.53	5.435	80	
11	5.53	5.324	80	
12	5.53	5.647	80	
13	5.53	5.477	80	
14	5.53	5.327	80	
15	5.53	5.544	80	*
16	5.53	5.585	80	
17	5.53	5.625	80	
18	5.53	5.438	80	
19	5.53	5.539	80	*
20	5.53	5.348	80	
21	5.53	5.724	80	
22	5.53	5.676	80	
23	5.53	5.705	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.548	80	*
2	5.53	5.317	80	
3	5.53	5.359	80	
4	5.53	5.586	80	
5	5.53	5.403	80	
6	5.53	5.288	80	
7	5.53	5.396	80	
8	5.53	5.51	80	*
9	5.53	5.423	80	
10	5.53	5.491	80	*
11	5.53	5.505	80	*
12	5.53	5.672	80	
13	5.53	5.415	80	
14	5.53	5.371	80	
15	5.53	5.328	80	
16	5.53	5.604	80	
17	5.53	5.399	80	
18	5.53	5.419	80	
19	5.53	5.721	80	
20	5.53	5.542	80	*
21	5.53	5.569	80	*
22	5.53	5.588	80	
23	5.53	5.579	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.68	80	
2	5.53	5.614	80	
3	5.53	5.263	80	
4	5.53	5.557	80	*
5	5.53	5.553	80	*
6	5.53	5.617	80	
7	5.53	5.635	80	
8	5.53	5.255	80	
9	5.53	5.293	80	
10	5.53	5.343	80	
11	5.53	5.63	80	
12	5.53	5.491	80	*
13	5.53	5.718	80	
14	5.53	5.694	80	
15	5.53	5.412	80	
16	5.53	5.332	80	
17	5.53	5.681	80	
18	5.53	5.474	80	
19	5.53	5.539	80	*
20	5.53	5.359	80	
21	5.53	5.627	80	
22	5.53	5.443	80	
23	5.53	5.382	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.586	80	
2	5.53	5.498	80	*
3	5.53	5.696	80	
4	5.53	5.634	80	
5	5.53	5.648	80	
6	5.53	5.297	80	
7	5.53	5.267	80	
8	5.53	5.29	80	
9	5.53	5.505	80	*
10	5.53	5.415	80	
11	5.53	5.443	80	
12	5.53	5.682	80	
13	5.53	5.311	80	
14	5.53	5.631	80	
15	5.53	5.299	80	
16	5.53	5.521	80	*
17	5.53	5.252	80	
18	5.53	5.639	80	
19	5.53	5.611	80	
20	5.53	5.296	80	
21	5.53	5.43	80	
22	5.53	5.27	80	
23	5.53	5.644	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.417	80	
2	5.53	5.539	80	*
3	5.53	5.544	80	*
4	5.53	5.423	80	
5	5.53	5.585	80	
6	5.53	5.459	80	
7	5.53	5.712	80	
8	5.53	5.254	80	
9	5.53	5.337	80	
10	5.53	5.492	80	*
11	5.53	5.301	80	
12	5.53	5.534	80	*
13	5.53	5.5	80	*
14	5.53	5.497	80	*
15	5.53	5.538	80	*
16	5.53	5.342	80	
17	5.53	5.386	80	
18	5.53	5.581	80	
19	5.53	5.369	80	
20	5.53	5.578	80	
21	5.53	5.583	80	
22	5.53	5.433	80	
23	5.53	5.277	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.344	80	
2	5.53	5.537	80	*
3	5.53	5.511	80	*
4	5.53	5.669	80	
5	5.53	5.545	80	*
6	5.53	5.56	80	*
7	5.53	5.265	80	
8	5.53	5.638	80	
9	5.53	5.386	80	
10	5.53	5.462	80	
11	5.53	5.405	80	
12	5.53	5.543	80	*
13	5.53	5.272	80	
14	5.53	5.251	80	
15	5.53	5.592	80	
16	5.53	5.367	80	
17	5.53	5.467	80	
18	5.53	5.42	80	
19	5.53	5.547	80	*
20	5.53	5.663	80	
21	5.53	5.601	80	
22	5.53	5.429	80	
23	5.53	5.418	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.646	80	
2	5.53	5.286	80	
3	5.53	5.441	80	
4	5.53	5.38	80	
5	5.53	5.42	80	
6	5.53	5.629	80	
7	5.53	5.405	80	
8	5.53	5.534	80	*
9	5.53	5.63	80	
10	5.53	5.382	80	
11	5.53	5.627	80	
12	5.53	5.257	80	
13	5.53	5.433	80	
14	5.53	5.391	80	
15	5.53	5.322	80	
16	5.53	5.396	80	
17	5.53	5.503	80	*
18	5.53	5.677	80	
19	5.53	5.678	80	
20	5.53	5.55	80	*
21	5.53	5.652	80	
22	5.53	5.723	80	
23	5.53	5.665	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.54	80	*
2	5.53	5.252	80	
3	5.53	5.644	80	
4	5.53	5.427	80	
5	5.53	5.57	80	*
6	5.53	5.72	80	
7	5.53	5.26	80	
8	5.53	5.416	80	
9	5.53	5.547	80	*
10	5.53	5.267	80	
11	5.53	5.49	80	*
12	5.53	5.303	80	
13	5.53	5.609	80	
14	5.53	5.591	80	
15	5.53	5.532	80	*
16	5.53	5.501	80	*
17	5.53	5.309	80	
18	5.53	5.314	80	
19	5.53	5.34	80	
20	5.53	5.615	80	
21	5.53	5.304	80	
22	5.53	5.359	80	
23	5.53	5.479	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.321	80	
2	5.53	5.401	80	
3	5.53	5.266	80	
4	5.53	5.485	80	
5	5.53	5.372	80	
6	5.53	5.679	80	
7	5.53	5.615	80	
8	5.53	5.575	80	
9	5.53	5.428	80	
10	5.53	5.39	80	
11	5.53	5.582	80	
12	5.53	5.572	80	
13	5.53	5.324	80	
14	5.53	5.475	80	
15	5.53	5.535	80	*
16	5.53	5.518	80	*
17	5.53	5.395	80	
18	5.53	5.286	80	
19	5.53	5.267	80	
20	5.53	5.448	80	
21	5.53	5.577	80	
22	5.53	5.56	80	*
23	5.53	5.435	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.443	80	
2	5.53	5.416	80	
3	5.53	5.599	80	
4	5.53	5.496	80	*
5	5.53	5.343	80	
6	5.53	5.553	80	*
7	5.53	5.695	80	
8	5.53	5.655	80	
9	5.53	5.454	80	
10	5.53	5.482	80	
11	5.53	5.647	80	
12	5.53	5.684	80	
13	5.53	5.328	80	
14	5.53	5.365	80	
15	5.53	5.395	80	
16	5.53	5.381	80	
17	5.53	5.671	80	
18	5.53	5.62	80	
19	5.53	5.431	80	
20	5.53	5.606	80	
21	5.53	5.593	80	
22	5.53	5.622	80	
23	5.53	5.686	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.477	80	
2	5.53	5.381	80	
3	5.53	5.604	80	
4	5.53	5.452	80	
5	5.53	5.386	80	
6	5.53	5.448	80	
7	5.53	5.294	80	
8	5.53	5.629	80	
9	5.53	5.699	80	
10	5.53	5.384	80	
11	5.53	5.546	80	*
12	5.53	5.309	80	
13	5.53	5.525	80	*
14	5.53	5.664	80	
15	5.53	5.467	80	
16	5.53	5.519	80	*
17	5.53	5.602	80	
18	5.53	5.522	80	*
19	5.53	5.256	80	
20	5.53	5.367	80	
21	5.53	5.323	80	
22	5.53	5.666	80	
23	5.53	5.697	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.544	80	*
2	5.53	5.394	80	
3	5.53	5.647	80	
4	5.53	5.421	80	
5	5.53	5.289	80	
6	5.53	5.705	80	
7	5.53	5.36	80	
8	5.53	5.534	80	*
9	5.53	5.389	80	
10	5.53	5.411	80	
11	5.53	5.628	80	
12	5.53	5.428	80	
13	5.53	5.57	80	*
14	5.53	5.506	80	*
15	5.53	5.386	80	
16	5.53	5.42	80	
17	5.53	5.32	80	
18	5.53	5.338	80	
19	5.53	5.591	80	
20	5.53	5.559	80	*
21	5.53	5.392	80	
22	5.53	5.691	80	
23	5.53	5.409	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.554	80	*
2	5.53	5.289	80	
3	5.53	5.662	80	
4	5.53	5.37	80	
5	5.53	5.367	80	
6	5.53	5.338	80	
7	5.53	5.649	80	
8	5.53	5.52	80	*
9	5.53	5.423	80	
10	5.53	5.685	80	
11	5.53	5.426	80	
12	5.53	5.292	80	
13	5.53	5.558	80	*
14	5.53	5.589	80	
15	5.53	5.487	80	
16	5.53	5.465	80	
17	5.53	5.389	80	
18	5.53	5.588	80	
19	5.53	5.35	80	
20	5.53	5.403	80	
21	5.53	5.294	80	
22	5.53	5.618	80	
23	5.53	5.687	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.541	80	*
2	5.53	5.604	80	
3	5.53	5.251	80	
4	5.53	5.686	80	
5	5.53	5.417	80	
6	5.53	5.41	80	
7	5.53	5.493	80	*
8	5.53	5.421	80	
9	5.53	5.331	80	
10	5.53	5.507	80	*
11	5.53	5.639	80	
12	5.53	5.607	80	
13	5.53	5.486	80	
14	5.53	5.297	80	
15	5.53	5.698	80	
16	5.53	5.614	80	
17	5.53	5.301	80	
18	5.53	5.322	80	
19	5.53	5.342	80	
20	5.53	5.666	80	
21	5.53	5.68	80	
22	5.53	5.53	80	*
23	5.53	5.623	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.403	80	
2	5.53	5.65	80	
3	5.53	5.523	80	*
4	5.53	5.332	80	
5	5.53	5.25	80	
6	5.53	5.571	80	
7	5.53	5.376	80	
8	5.53	5.613	80	
9	5.53	5.309	80	
10	5.53	5.304	80	
11	5.53	5.5	80	*
12	5.53	5.385	80	
13	5.53	5.709	80	
14	5.53	5.601	80	
15	5.53	5.536	80	*
16	5.53	5.268	80	
17	5.53	5.358	80	
18	5.53	5.521	80	*
19	5.53	5.473	80	
20	5.53	5.437	80	
21	5.53	5.514	80	*
22	5.53	5.38	80	
23	5.53	5.363	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.365	80	
2	5.53	5.488	80	
3	5.53	5.499	80	*
4	5.53	5.443	80	
5	5.53	5.268	80	
6	5.53	5.644	80	
7	5.53	5.354	80	
8	5.53	5.295	80	
9	5.53	5.654	80	
10	5.53	5.581	80	
11	5.53	5.377	80	
12	5.53	5.56	80	*
13	5.53	5.452	80	
14	5.53	5.405	80	
15	5.53	5.708	80	
16	5.53	5.607	80	
17	5.53	5.275	80	
18	5.53	5.55	80	*
19	5.53	5.27	80	
20	5.53	5.304	80	
21	5.53	5.544	80	*
22	5.53	5.474	80	
23	5.53	5.563	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.512	80	*
2	5.53	5.644	80	
3	5.53	5.721	80	
4	5.53	5.57	80	*
5	5.53	5.438	80	
6	5.53	5.404	80	
7	5.53	5.566	80	*
8	5.53	5.58	80	
9	5.53	5.66	80	
10	5.53	5.279	80	
11	5.53	5.654	80	
12	5.53	5.564	80	*
13	5.53	5.376	80	
14	5.53	5.621	80	
15	5.53	5.405	80	
16	5.53	5.414	80	
17	5.53	5.469	80	
18	5.53	5.501	80	*
19	5.53	5.306	80	
20	5.53	5.547	80	*
21	5.53	5.701	80	
22	5.53	5.656	80	
23	5.53	5.536	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.463	80	
2	5.53	5.541	80	*
3	5.53	5.672	80	
4	5.53	5.56	80	*
5	5.53	5.444	80	
6	5.53	5.427	80	
7	5.53	5.616	80	
8	5.53	5.548	80	*
9	5.53	5.628	80	
10	5.53	5.466	80	
11	5.53	5.589	80	
12	5.53	5.577	80	
13	5.53	5.669	80	
14	5.53	5.545	80	*
15	5.53	5.268	80	
16	5.53	5.338	80	
17	5.53	5.649	80	
18	5.53	5.574	80	
19	5.53	5.673	80	
20	5.53	5.321	80	
21	5.53	5.309	80	
22	5.53	5.48	80	
23	5.53	5.333	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.683	80	
2	5.53	5.459	80	
3	5.53	5.4	80	
4	5.53	5.715	80	
5	5.53	5.596	80	
6	5.53	5.542	80	*
7	5.53	5.292	80	
8	5.53	5.722	80	
9	5.53	5.352	80	
10	5.53	5.484	80	
11	5.53	5.595	80	
12	5.53	5.61	80	
13	5.53	5.623	80	
14	5.53	5.583	80	
15	5.53	5.433	80	
16	5.53	5.645	80	
17	5.53	5.402	80	
18	5.53	5.634	80	
19	5.53	5.354	80	
20	5.53	5.298	80	
21	5.53	5.307	80	
22	5.53	5.262	80	
23	5.53	5.63	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.682	80	
2	5.53	5.447	80	
3	5.53	5.694	80	
4	5.53	5.458	80	
5	5.53	5.717	80	
6	5.53	5.507	80	*
7	5.53	5.357	80	
8	5.53	5.47	80	
9	5.53	5.547	80	*
10	5.53	5.328	80	
11	5.53	5.643	80	
12	5.53	5.499	80	*
13	5.53	5.668	80	
14	5.53	5.683	80	
15	5.53	5.373	80	
16	5.53	5.713	80	
17	5.53	5.583	80	
18	5.53	5.474	80	
19	5.53	5.589	80	
20	5.53	5.371	80	
21	5.53	5.459	80	
22	5.53	5.344	80	
23	5.53	5.332	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.544	80	*
2	5.53	5.641	80	
3	5.53	5.303	80	
4	5.53	5.353	80	
5	5.53	5.485	80	
6	5.53	5.413	80	
7	5.53	5.594	80	
8	5.53	5.302	80	
9	5.53	5.392	80	
10	5.53	5.654	80	
11	5.53	5.323	80	
12	5.53	5.475	80	
13	5.53	5.469	80	
14	5.53	5.483	80	
15	5.53	5.306	80	
16	5.53	5.516	80	*
17	5.53	5.596	80	
18	5.53	5.259	80	
19	5.53	5.709	80	
20	5.53	5.262	80	
21	5.53	5.646	80	
22	5.53	5.7	80	
23	5.53	5.662	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.264	80	
2	5.53	5.522	80	*
3	5.53	5.273	80	
4	5.53	5.656	80	
5	5.53	5.413	80	
6	5.53	5.547	80	*
7	5.53	5.436	80	
8	5.53	5.664	80	
9	5.53	5.496	80	*
10	5.53	5.282	80	
11	5.53	5.265	80	
12	5.53	5.407	80	
13	5.53	5.253	80	
14	5.53	5.262	80	
15	5.53	5.314	80	
16	5.53	5.489	80	
17	5.53	5.704	80	
18	5.53	5.266	80	
19	5.53	5.586	80	
20	5.53	5.296	80	
21	5.53	5.305	80	
22	5.53	5.615	80	
23	5.53	5.61	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.497	80	*
2	5.53	5.723	80	
3	5.53	5.507	80	*
4	5.53	5.5	80	*
5	5.53	5.397	80	
6	5.53	5.695	80	
7	5.53	5.483	80	
8	5.53	5.346	80	
9	5.53	5.604	80	
10	5.53	5.585	80	
11	5.53	5.574	80	
12	5.53	5.292	80	
13	5.53	5.458	80	
14	5.53	5.334	80	
15	5.53	5.451	80	
16	5.53	5.42	80	
17	5.53	5.571	80	
18	5.53	5.405	80	
19	5.53	5.299	80	
20	5.53	5.582	80	
21	5.53	5.446	80	
22	5.53	5.453	80	
23	5.53	5.505	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.487	80	
2	5.53	5.554	80	*
3	5.53	5.297	80	
4	5.53	5.652	80	
5	5.53	5.64	80	
6	5.53	5.721	80	
7	5.53	5.276	80	
8	5.53	5.585	80	
9	5.53	5.34	80	
10	5.53	5.438	80	
11	5.53	5.619	80	
12	5.53	5.28	80	
13	5.53	5.698	80	
14	5.53	5.337	80	
15	5.53	5.252	80	
16	5.53	5.285	80	
17	5.53	5.44	80	
18	5.53	5.499	80	*
19	5.53	5.496	80	*
20	5.53	5.664	80	
21	5.53	5.592	80	
22	5.53	5.697	80	
23	5.53	5.43	80	

Product : WiFi 6 (802.11ax) 3x3 MU-MIMO Dual Band Module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Transmit (802.11ax-160 MHz)
 Test Date : 2023/04/20

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	0
19	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5570	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			93.33
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.347	160	
2	5.57	5.577	160	*
3	5.57	5.527	160	*
4	5.57	5.37	160	
5	5.57	5.284	160	
6	5.57	5.515	160	*
7	5.57	5.689	160	
8	5.57	5.659	160	
9	5.57	5.601	160	*
10	5.57	5.543	160	*
11	5.57	5.497	160	*
12	5.57	5.304	160	
13	5.57	5.588	160	*
14	5.57	5.428	160	
15	5.57	5.7	160	
16	5.57	5.554	160	*
17	5.57	5.692	160	
18	5.57	5.365	160	
19	5.57	5.28	160	
20	5.57	5.712	160	
21	5.57	5.376	160	
22	5.57	5.281	160	
23	5.57	5.392	160	
24	5.57	5.505	160	*
25	5.57	5.64	160	*
26	5.57	5.625	160	*
27	5.57	5.523	160	*
28	5.57	5.265	160	
29	5.57	5.351	160	
30	5.57	5.722	160	
31	5.57	5.596	160	*
32	5.57	5.493	160	*
33	5.57	5.655	160	
34	5.57	5.474	160	
35	5.57	5.294	160	
36	5.57	5.307	160	
37	5.57	5.701	160	
38	5.57	5.595	160	*
39	5.57	5.283	160	
40	5.57	5.705	160	
41	5.57	5.485	160	
42	5.57	5.451	160	
43	5.57	5.513	160	*
44	5.57	5.604	160	*
45	5.57	5.431	160	
46	5.57	5.634	160	*
47	5.57	5.354	160	
48	5.57	5.717	160	
49	5.57	5.508	160	*

50	5.57	5.495	160	*
51	5.57	5.43	160	
52	5.57	5.462	160	
53	5.57	5.648	160	*
54	5.57	5.4	160	
55	5.57	5.469	160	
56	5.57	5.671	160	
57	5.57	5.486	160	
58	5.57	5.259	160	
59	5.57	5.714	160	
60	5.57	5.684	160	
61	5.57	5.622	160	*
62	5.57	5.678	160	
63	5.57	5.711	160	
64	5.57	5.645	160	*
65	5.57	5.503	160	*
66	5.57	5.694	160	
67	5.57	5.447	160	
68	5.57	5.666	160	
69	5.57	5.66	160	
70	5.57	5.452	160	
71	5.57	5.581	160	*
72	5.57	5.611	160	*
73	5.57	5.285	160	
74	5.57	5.631	160	*
75	5.57	5.492	160	*
76	5.57	5.576	160	*
77	5.57	5.325	160	
78	5.57	5.32	160	
79	5.57	5.641	160	*
80	5.57	5.656	160	
81	5.57	5.395	160	
82	5.57	5.322	160	
83	5.57	5.673	160	
84	5.57	5.44	160	
85	5.57	5.483	160	
86	5.57	5.652	160	
87	5.57	5.579	160	*
88	5.57	5.562	160	*
89	5.57	5.55	160	*
90	5.57	5.51	160	*
91	5.57	5.38	160	
92	5.57	5.605	160	*
93	5.57	5.381	160	
94	5.57	5.574	160	*
95	5.57	5.699	160	
96	5.57	5.635	160	*
97	5.57	5.522	160	*
98	5.57	5.308	160	
99	5.57	5.532	160	*
100	5.57	5.327	160	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.704	160	
2	5.57	5.437	160	
3	5.57	5.315	160	
4	5.57	5.709	160	
5	5.57	5.291	160	
6	5.57	5.457	160	
7	5.57	5.663	160	
8	5.57	5.308	160	
9	5.57	5.559	160	*
10	5.57	5.624	160	*
11	5.57	5.514	160	*
12	5.57	5.552	160	*
13	5.57	5.441	160	
14	5.57	5.586	160	*
15	5.57	5.67	160	
16	5.57	5.354	160	
17	5.57	5.46	160	
18	5.57	5.668	160	
19	5.57	5.496	160	*
20	5.57	5.419	160	
21	5.57	5.436	160	
22	5.57	5.693	160	
23	5.57	5.255	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.496	160	*
2	5.57	5.632	160	*
3	5.57	5.549	160	*
4	5.57	5.478	160	
5	5.57	5.506	160	*
6	5.57	5.634	160	*
7	5.57	5.489	160	
8	5.57	5.675	160	
9	5.57	5.347	160	
10	5.57	5.623	160	*
11	5.57	5.466	160	
12	5.57	5.276	160	
13	5.57	5.324	160	
14	5.57	5.571	160	*
15	5.57	5.379	160	
16	5.57	5.671	160	
17	5.57	5.257	160	
18	5.57	5.557	160	*
19	5.57	5.636	160	*
20	5.57	5.468	160	
21	5.57	5.497	160	*
22	5.57	5.664	160	
23	5.57	5.286	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.614	160	*
2	5.57	5.672	160	
3	5.57	5.449	160	
4	5.57	5.676	160	
5	5.57	5.526	160	*
6	5.57	5.306	160	
7	5.57	5.624	160	*
8	5.57	5.534	160	*
9	5.57	5.647	160	*
10	5.57	5.661	160	
11	5.57	5.252	160	
12	5.57	5.366	160	
13	5.57	5.32	160	
14	5.57	5.265	160	
15	5.57	5.615	160	*
16	5.57	5.646	160	*
17	5.57	5.722	160	
18	5.57	5.523	160	*
19	5.57	5.618	160	*
20	5.57	5.529	160	*
21	5.57	5.376	160	
22	5.57	5.678	160	
23	5.57	5.459	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.538	160	*
2	5.57	5.68	160	
3	5.57	5.45	160	
4	5.57	5.414	160	
5	5.57	5.334	160	
6	5.57	5.337	160	
7	5.57	5.26	160	
8	5.57	5.505	160	*
9	5.57	5.263	160	
10	5.57	5.295	160	
11	5.57	5.574	160	*
12	5.57	5.415	160	
13	5.57	5.718	160	
14	5.57	5.377	160	
15	5.57	5.601	160	*
16	5.57	5.692	160	
17	5.57	5.592	160	*
18	5.57	5.57	160	*
19	5.57	5.264	160	
20	5.57	5.686	160	
21	5.57	5.267	160	
22	5.57	5.699	160	
23	5.57	5.666	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.721	160	
2	5.57	5.642	160	*
3	5.57	5.291	160	
4	5.57	5.524	160	*
5	5.57	5.258	160	
6	5.57	5.332	160	
7	5.57	5.364	160	
8	5.57	5.574	160	*
9	5.57	5.323	160	
10	5.57	5.705	160	
11	5.57	5.303	160	
12	5.57	5.422	160	
13	5.57	5.667	160	
14	5.57	5.454	160	
15	5.57	5.35	160	
16	5.57	5.724	160	
17	5.57	5.704	160	
18	5.57	5.575	160	*
19	5.57	5.26	160	
20	5.57	5.471	160	
21	5.57	5.488	160	
22	5.57	5.465	160	
23	5.57	5.367	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.508	160	*
2	5.57	5.635	160	*
3	5.57	5.321	160	
4	5.57	5.63	160	*
5	5.57	5.661	160	
6	5.57	5.608	160	*
7	5.57	5.524	160	*
8	5.57	5.713	160	
9	5.57	5.602	160	*
10	5.57	5.35	160	
11	5.57	5.67	160	
12	5.57	5.691	160	
13	5.57	5.721	160	
14	5.57	5.292	160	
15	5.57	5.426	160	
16	5.57	5.528	160	*
17	5.57	5.364	160	
18	5.57	5.266	160	
19	5.57	5.49	160	*
20	5.57	5.423	160	
21	5.57	5.631	160	*
22	5.57	5.575	160	*
23	5.57	5.352	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.313	160	
2	5.57	5.611	160	*
3	5.57	5.364	160	
4	5.57	5.702	160	
5	5.57	5.304	160	
6	5.57	5.434	160	
7	5.57	5.529	160	*
8	5.57	5.471	160	
9	5.57	5.466	160	
10	5.57	5.509	160	*
11	5.57	5.563	160	*
12	5.57	5.332	160	
13	5.57	5.373	160	
14	5.57	5.251	160	
15	5.57	5.561	160	*
16	5.57	5.309	160	
17	5.57	5.631	160	*
18	5.57	5.505	160	*
19	5.57	5.552	160	*
20	5.57	5.311	160	
21	5.57	5.267	160	
22	5.57	5.275	160	
23	5.57	5.589	160	*

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.274	160	
2	5.57	5.39	160	
3	5.57	5.357	160	
4	5.57	5.621	160	*
5	5.57	5.604	160	*
6	5.57	5.706	160	
7	5.57	5.718	160	
8	5.57	5.648	160	*
9	5.57	5.581	160	*
10	5.57	5.281	160	
11	5.57	5.256	160	
12	5.57	5.263	160	
13	5.57	5.72	160	
14	5.57	5.335	160	
15	5.57	5.624	160	*
16	5.57	5.708	160	
17	5.57	5.534	160	*
18	5.57	5.677	160	
19	5.57	5.272	160	
20	5.57	5.716	160	
21	5.57	5.315	160	
22	5.57	5.34	160	
23	5.57	5.359	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.419	160	
2	5.57	5.708	160	
3	5.57	5.519	160	*
4	5.57	5.316	160	
5	5.57	5.379	160	
6	5.57	5.696	160	
7	5.57	5.343	160	
8	5.57	5.59	160	*
9	5.57	5.493	160	*
10	5.57	5.695	160	
11	5.57	5.635	160	*
12	5.57	5.49	160	*
13	5.57	5.395	160	
14	5.57	5.361	160	
15	5.57	5.309	160	
16	5.57	5.6	160	*
17	5.57	5.5	160	*
18	5.57	5.615	160	*
19	5.57	5.503	160	*
20	5.57	5.409	160	
21	5.57	5.688	160	
22	5.57	5.57	160	*
23	5.57	5.617	160	*

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.446	160	
2	5.57	5.348	160	
3	5.57	5.72	160	
4	5.57	5.586	160	*
5	5.57	5.329	160	
6	5.57	5.534	160	*
7	5.57	5.563	160	*
8	5.57	5.613	160	*
9	5.57	5.693	160	
10	5.57	5.519	160	*
11	5.57	5.656	160	
12	5.57	5.721	160	
13	5.57	5.272	160	
14	5.57	5.583	160	*
15	5.57	5.6	160	*
16	5.57	5.585	160	*
17	5.57	5.452	160	
18	5.57	5.661	160	
19	5.57	5.404	160	
20	5.57	5.35	160	
21	5.57	5.416	160	
22	5.57	5.686	160	
23	5.57	5.371	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.256	160	
2	5.57	5.299	160	
3	5.57	5.613	160	*
4	5.57	5.383	160	
5	5.57	5.537	160	*
6	5.57	5.442	160	
7	5.57	5.399	160	
8	5.57	5.722	160	
9	5.57	5.499	160	*
10	5.57	5.544	160	*
11	5.57	5.524	160	*
12	5.57	5.53	160	*
13	5.57	5.439	160	
14	5.57	5.28	160	
15	5.57	5.531	160	*
16	5.57	5.431	160	
17	5.57	5.376	160	
18	5.57	5.268	160	
19	5.57	5.474	160	
20	5.57	5.43	160	
21	5.57	5.705	160	
22	5.57	5.651	160	
23	5.57	5.575	160	*

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.546	160	*
2	5.57	5.714	160	
3	5.57	5.44	160	
4	5.57	5.459	160	
5	5.57	5.505	160	*
6	5.57	5.586	160	*
7	5.57	5.285	160	
8	5.57	5.623	160	*
9	5.57	5.386	160	
10	5.57	5.447	160	
11	5.57	5.299	160	
12	5.57	5.448	160	
13	5.57	5.689	160	
14	5.57	5.269	160	
15	5.57	5.521	160	*
16	5.57	5.7	160	
17	5.57	5.356	160	
18	5.57	5.343	160	
19	5.57	5.304	160	
20	5.57	5.315	160	
21	5.57	5.514	160	*
22	5.57	5.307	160	
23	5.57	5.333	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.578	160	*
2	5.57	5.521	160	*
3	5.57	5.473	160	
4	5.57	5.668	160	
5	5.57	5.343	160	
6	5.57	5.303	160	
7	5.57	5.517	160	*
8	5.57	5.422	160	
9	5.57	5.257	160	
10	5.57	5.52	160	*
11	5.57	5.363	160	
12	5.57	5.477	160	
13	5.57	5.715	160	
14	5.57	5.301	160	
15	5.57	5.274	160	
16	5.57	5.332	160	
17	5.57	5.682	160	
18	5.57	5.491	160	*
19	5.57	5.357	160	
20	5.57	5.546	160	*
21	5.57	5.277	160	
22	5.57	5.438	160	
23	5.57	5.398	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.29	160	
2	5.57	5.407	160	
3	5.57	5.34	160	
4	5.57	5.447	160	
5	5.57	5.299	160	
6	5.57	5.503	160	*
7	5.57	5.293	160	
8	5.57	5.704	160	
9	5.57	5.298	160	
10	5.57	5.537	160	*
11	5.57	5.723	160	
12	5.57	5.457	160	
13	5.57	5.623	160	*
14	5.57	5.67	160	
15	5.57	5.601	160	*
16	5.57	5.674	160	
17	5.57	5.589	160	*
18	5.57	5.599	160	*
19	5.57	5.251	160	
20	5.57	5.371	160	
21	5.57	5.636	160	*
22	5.57	5.603	160	*
23	5.57	5.439	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.661	160	
2	5.57	5.323	160	
3	5.57	5.539	160	*
4	5.57	5.687	160	
5	5.57	5.497	160	*
6	5.57	5.526	160	*
7	5.57	5.631	160	*
8	5.57	5.332	160	
9	5.57	5.511	160	*
10	5.57	5.531	160	*
11	5.57	5.578	160	*
12	5.57	5.491	160	*
13	5.57	5.672	160	
14	5.57	5.716	160	
15	5.57	5.255	160	
16	5.57	5.278	160	
17	5.57	5.597	160	*
18	5.57	5.38	160	
19	5.57	5.534	160	*
20	5.57	5.59	160	*
21	5.57	5.293	160	
22	5.57	5.367	160	
23	5.57	5.51	160	*

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.674	160	
2	5.57	5.525	160	*
3	5.57	5.61	160	*
4	5.57	5.256	160	
5	5.57	5.381	160	
6	5.57	5.382	160	
7	5.57	5.608	160	*
8	5.57	5.654	160	
9	5.57	5.268	160	
10	5.57	5.7	160	
11	5.57	5.575	160	*
12	5.57	5.698	160	
13	5.57	5.649	160	*
14	5.57	5.409	160	
15	5.57	5.374	160	
16	5.57	5.316	160	
17	5.57	5.387	160	
18	5.57	5.714	160	
19	5.57	5.668	160	
20	5.57	5.44	160	
21	5.57	5.405	160	
22	5.57	5.508	160	*
23	5.57	5.335	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.454	160	
2	5.57	5.598	160	*
3	5.57	5.596	160	*
4	5.57	5.653	160	
5	5.57	5.621	160	*
6	5.57	5.338	160	
7	5.57	5.318	160	
8	5.57	5.336	160	
9	5.57	5.575	160	*
10	5.57	5.555	160	*
11	5.57	5.6	160	*
12	5.57	5.392	160	
13	5.57	5.49	160	*
14	5.57	5.558	160	*
15	5.57	5.658	160	
16	5.57	5.449	160	
17	5.57	5.674	160	
18	5.57	5.307	160	
19	5.57	5.471	160	
20	5.57	5.567	160	*
21	5.57	5.576	160	*
22	5.57	5.51	160	*
23	5.57	5.41	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.532	160	*
2	5.57	5.315	160	
3	5.57	5.492	160	*
4	5.57	5.397	160	
5	5.57	5.525	160	*
6	5.57	5.61	160	*
7	5.57	5.454	160	
8	5.57	5.424	160	
9	5.57	5.571	160	*
10	5.57	5.311	160	
11	5.57	5.328	160	
12	5.57	5.264	160	
13	5.57	5.305	160	
14	5.57	5.566	160	*
15	5.57	5.58	160	*
16	5.57	5.512	160	*
17	5.57	5.485	160	
18	5.57	5.437	160	
19	5.57	5.25	160	
20	5.57	5.526	160	*
21	5.57	5.527	160	*
22	5.57	5.584	160	*
23	5.57	5.303	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.48	160	
2	5.57	5.479	160	
3	5.57	5.717	160	
4	5.57	5.601	160	*
5	5.57	5.297	160	
6	5.57	5.533	160	*
7	5.57	5.602	160	*
8	5.57	5.661	160	
9	5.57	5.556	160	*
10	5.57	5.397	160	
11	5.57	5.66	160	
12	5.57	5.434	160	
13	5.57	5.632	160	*
14	5.57	5.374	160	
15	5.57	5.692	160	
16	5.57	5.674	160	
17	5.57	5.569	160	*
18	5.57	5.72	160	
19	5.57	5.633	160	*
20	5.57	5.457	160	
21	5.57	5.356	160	
22	5.57	5.349	160	
23	5.57	5.422	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.305	160	
2	5.57	5.364	160	
3	5.57	5.708	160	
4	5.57	5.336	160	
5	5.57	5.295	160	
6	5.57	5.405	160	
7	5.57	5.695	160	
8	5.57	5.316	160	
9	5.57	5.677	160	
10	5.57	5.433	160	
11	5.57	5.425	160	
12	5.57	5.632	160	*
13	5.57	5.586	160	*
14	5.57	5.666	160	
15	5.57	5.618	160	*
16	5.57	5.458	160	
17	5.57	5.259	160	
18	5.57	5.7	160	
19	5.57	5.633	160	*
20	5.57	5.271	160	
21	5.57	5.382	160	
22	5.57	5.492	160	*
23	5.57	5.344	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.561	160	*
2	5.57	5.485	160	
3	5.57	5.514	160	*
4	5.57	5.54	160	*
5	5.57	5.488	160	
6	5.57	5.625	160	*
7	5.57	5.713	160	
8	5.57	5.339	160	
9	5.57	5.307	160	
10	5.57	5.596	160	*
11	5.57	5.583	160	*
12	5.57	5.348	160	
13	5.57	5.57	160	*
14	5.57	5.373	160	
15	5.57	5.689	160	
16	5.57	5.437	160	
17	5.57	5.389	160	
18	5.57	5.642	160	*
19	5.57	5.594	160	*
20	5.57	5.68	160	
21	5.57	5.686	160	
22	5.57	5.506	160	*
23	5.57	5.291	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.547	160	*
2	5.57	5.461	160	
3	5.57	5.396	160	
4	5.57	5.6	160	*
5	5.57	5.495	160	*
6	5.57	5.458	160	
7	5.57	5.663	160	
8	5.57	5.67	160	
9	5.57	5.693	160	
10	5.57	5.432	160	
11	5.57	5.459	160	
12	5.57	5.42	160	
13	5.57	5.699	160	
14	5.57	5.378	160	
15	5.57	5.541	160	*
16	5.57	5.498	160	*
17	5.57	5.443	160	
18	5.57	5.642	160	*
19	5.57	5.259	160	
20	5.57	5.584	160	*
21	5.57	5.48	160	
22	5.57	5.425	160	
23	5.57	5.594	160	*

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.39	160	
2	5.57	5.391	160	
3	5.57	5.638	160	*
4	5.57	5.342	160	
5	5.57	5.257	160	
6	5.57	5.461	160	
7	5.57	5.606	160	*
8	5.57	5.469	160	
9	5.57	5.717	160	
10	5.57	5.564	160	*
11	5.57	5.302	160	
12	5.57	5.382	160	
13	5.57	5.356	160	
14	5.57	5.507	160	*
15	5.57	5.334	160	
16	5.57	5.43	160	
17	5.57	5.251	160	
18	5.57	5.354	160	
19	5.57	5.547	160	*
20	5.57	5.392	160	
21	5.57	5.413	160	
22	5.57	5.693	160	
23	5.57	5.447	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.368	160	
2	5.57	5.676	160	
3	5.57	5.311	160	
4	5.57	5.413	160	
5	5.57	5.342	160	
6	5.57	5.331	160	
7	5.57	5.336	160	
8	5.57	5.558	160	*
9	5.57	5.43	160	
10	5.57	5.651	160	
11	5.57	5.314	160	
12	5.57	5.405	160	
13	5.57	5.631	160	*
14	5.57	5.648	160	*
15	5.57	5.633	160	*
16	5.57	5.392	160	
17	5.57	5.36	160	
18	5.57	5.63	160	*
19	5.57	5.52	160	*
20	5.57	5.529	160	*
21	5.57	5.523	160	*
22	5.57	5.579	160	*
23	5.57	5.438	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.409	160	
2	5.57	5.576	160	*
3	5.57	5.465	160	
4	5.57	5.403	160	
5	5.57	5.411	160	
6	5.57	5.562	160	*
7	5.57	5.706	160	
8	5.57	5.379	160	
9	5.57	5.678	160	
10	5.57	5.41	160	
11	5.57	5.317	160	
12	5.57	5.724	160	
13	5.57	5.428	160	
14	5.57	5.601	160	*
15	5.57	5.274	160	
16	5.57	5.343	160	
17	5.57	5.517	160	*
18	5.57	5.613	160	*
19	5.57	5.256	160	
20	5.57	5.258	160	
21	5.57	5.458	160	
22	5.57	5.605	160	*
23	5.57	5.265	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.3	160	
2	5.57	5.598	160	*
3	5.57	5.262	160	
4	5.57	5.573	160	*
5	5.57	5.443	160	
6	5.57	5.615	160	*
7	5.57	5.475	160	
8	5.57	5.36	160	
9	5.57	5.529	160	*
10	5.57	5.696	160	
11	5.57	5.383	160	
12	5.57	5.553	160	*
13	5.57	5.438	160	
14	5.57	5.301	160	
15	5.57	5.283	160	
16	5.57	5.494	160	*
17	5.57	5.632	160	*
18	5.57	5.665	160	
19	5.57	5.299	160	
20	5.57	5.397	160	
21	5.57	5.579	160	*
22	5.57	5.368	160	
23	5.57	5.61	160	*

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.469	160	
2	5.57	5.674	160	
3	5.57	5.318	160	
4	5.57	5.252	160	
5	5.57	5.441	160	
6	5.57	5.606	160	*
7	5.57	5.547	160	*
8	5.57	5.632	160	*
9	5.57	5.42	160	
10	5.57	5.479	160	
11	5.57	5.71	160	
12	5.57	5.642	160	*
13	5.57	5.672	160	
14	5.57	5.433	160	
15	5.57	5.614	160	*
16	5.57	5.581	160	*
17	5.57	5.497	160	*
18	5.57	5.595	160	*
19	5.57	5.438	160	
20	5.57	5.514	160	*
21	5.57	5.532	160	*
22	5.57	5.556	160	*
23	5.57	5.471	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.443	160	
2	5.57	5.29	160	
3	5.57	5.286	160	
4	5.57	5.565	160	*
5	5.57	5.459	160	
6	5.57	5.676	160	
7	5.57	5.547	160	*
8	5.57	5.509	160	*
9	5.57	5.568	160	*
10	5.57	5.606	160	*
11	5.57	5.371	160	
12	5.57	5.36	160	
13	5.57	5.345	160	
14	5.57	5.467	160	
15	5.57	5.642	160	*
16	5.57	5.648	160	*
17	5.57	5.682	160	
18	5.57	5.671	160	
19	5.57	5.375	160	
20	5.57	5.337	160	
21	5.57	5.693	160	
22	5.57	5.617	160	*
23	5.57	5.331	160	

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.57	5.435	160	
2	5.57	5.716	160	
3	5.57	5.268	160	
4	5.57	5.341	160	
5	5.57	5.664	160	
6	5.57	5.529	160	*
7	5.57	5.718	160	
8	5.57	5.502	160	*
9	5.57	5.693	160	
10	5.57	5.319	160	
11	5.57	5.568	160	*
12	5.57	5.566	160	*
13	5.57	5.456	160	
14	5.57	5.307	160	
15	5.57	5.358	160	
16	5.57	5.286	160	
17	5.57	5.614	160	*
18	5.57	5.397	160	
19	5.57	5.584	160	*
20	5.57	5.34	160	
21	5.57	5.56	160	*
22	5.57	5.627	160	*
23	5.57	5.538	160	*

Mode 1 – 802.11ax20

Total Type 1~4 Radar Statistical Performance (5500MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	86.67	>60%	Pass
2	93.33	>60%	Pass
3	86.67	>60%	Pass
4	80.00	>60%	Pass
Total Type 1~4	86.67	>80%	Pass
5	90.00	≥80%	Pass
6	93.33	≥70%	Pass

Mode 2 – 802.11ax40

Total Type 1~4 Radar Statistical Performance (5510MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	90.00	>60%	Pass
2	90.00	>60%	Pass
3	73.33	>60%	Pass
4	70.00	>60%	Pass
Total Type 1~4	80.83	>80%	Pass
5	86.67	≥80%	Pass
6	96.67	≥70%	Pass

Mode 3 – 802.11ax80

Total Type 1~4 Radar Statistical Performance (5530MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	86.67	>60%	Pass
2	93.33	>60%	Pass
3	73.33	>60%	Pass
4	70.00	>60%	Pass
Total Type 1~4	80.83	>80%	Pass
5	83.33	≥80%	Pass
6	93.33	≥70%	Pass

Mode 4 – 802.11ax160

Total Type 1~4 Radar Statistical Performance (5570MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	90.00	>60%	Pass
2	90.00	>60%	Pass
3	80.00	>60%	Pass
4	66.67	>60%	Pass
Total Type 1~4	81.67	>80%	Pass
5	83.33	≥80%	Pass
6	96.67	≥70%	Pass