


5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

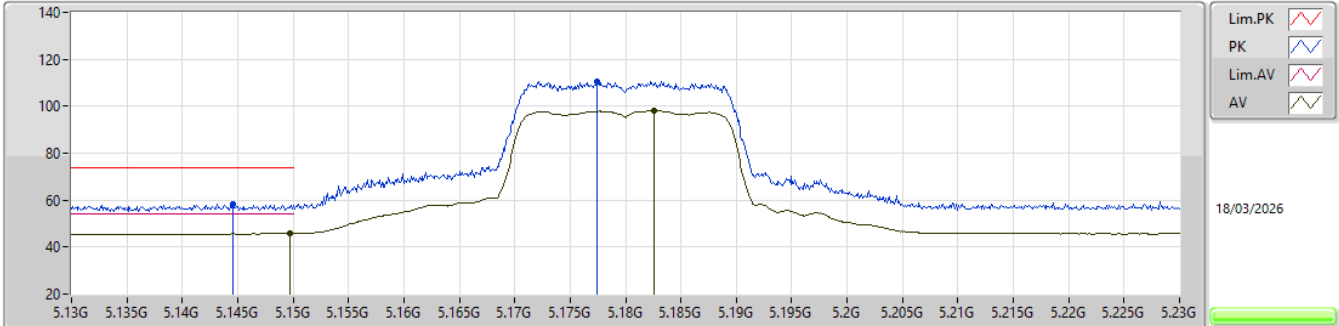


EUT_Y_1TX
Setting 16.5
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1446G	58.50	74.00	-15.50	47.46	3	Vertical	87	2.81	-	33.59	7.58	30.13				
AV	5.1497G	45.91	54.00	-8.09	34.86	3	Vertical	87	2.81	-	33.60	7.58	30.13				
PK	5.1774G	110.40	Inf	-Inf	99.30	3	Vertical	87	2.81	-	33.65	7.59	30.14				
AV	5.1826G	98.09	Inf	-Inf	86.97	3	Vertical	87	2.81	-	33.67	7.59	30.14				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

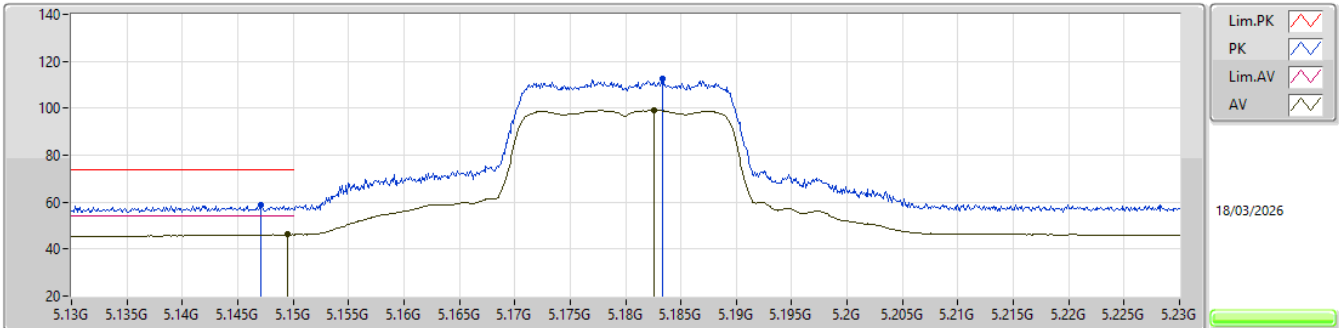


EUT Y_1TX
Setting 16.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1471G	58.80	74.00	-15.20	47.76	3	Horizontal	303	1.80	-	33.59	7.58	30.13			
AV	5.1495G	46.19	54.00	-7.81	35.14	3	Horizontal	303	1.80	-	33.60	7.58	30.13			
PK	5.1833G	112.34	Inf	-Inf	101.23	3	Horizontal	303	1.80	-	33.67	7.59	30.15			
AV	5.1826G	99.16	Inf	-Inf	88.04	3	Horizontal	303	1.80	-	33.67	7.59	30.14			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

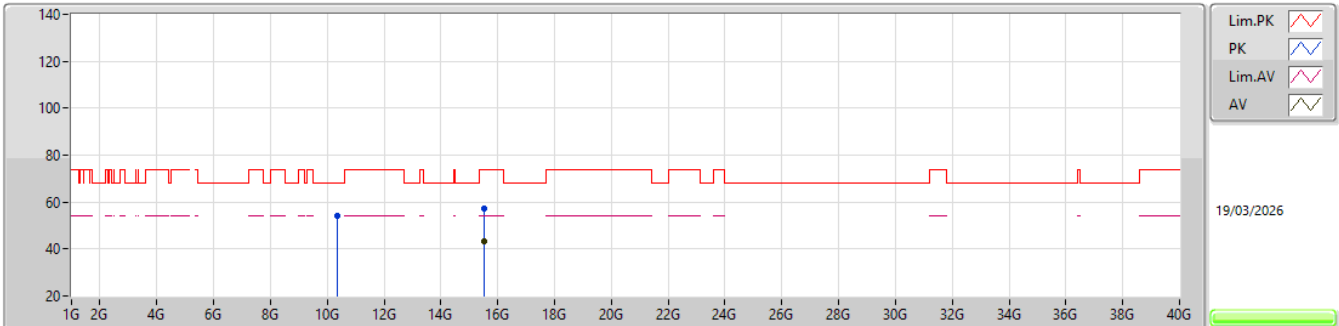


EUT_Y_1TX
Setting 16.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3598G	54.07	68.20	-14.13	70.40	3	Vertical	121	1.81	-	38.38	11.96	66.67			
PK	15.54095G	57.06	74.00	-16.94	68.52	3	Vertical	258	2.07	-	37.94	14.43	63.83			
AV	15.53693G	43.28	54.00	-10.72	54.72	3	Vertical	258	2.07	-	37.95	14.43	63.82			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

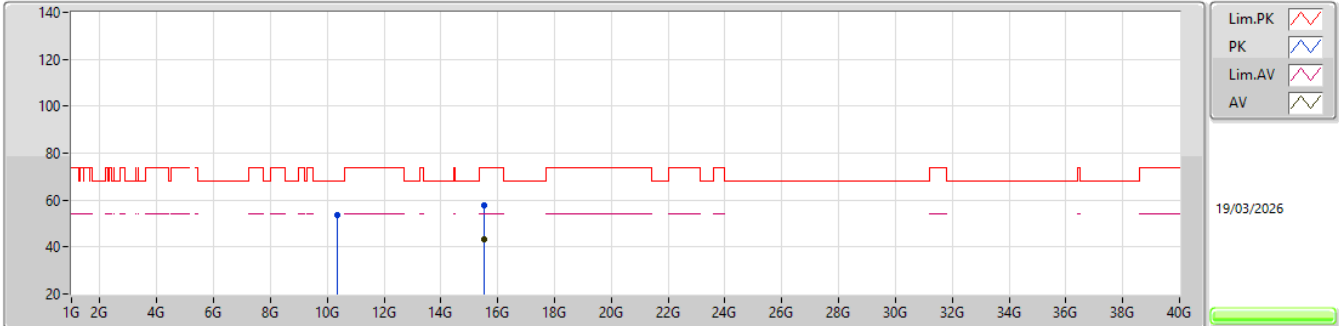


EUT_Y_1TX
Setting 16.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35527G	53.49	68.20	-14.71	69.81	3	Horizontal	206	1.14	-	38.39	11.96	66.67			
PK	15.53647G	57.62	74.00	-16.38	69.06	3	Horizontal	29	2.68	-	37.95	14.43	63.82			
AV	15.53607G	43.28	54.00	-10.72	54.71	3	Horizontal	29	2.68	-	37.96	14.43	63.82			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

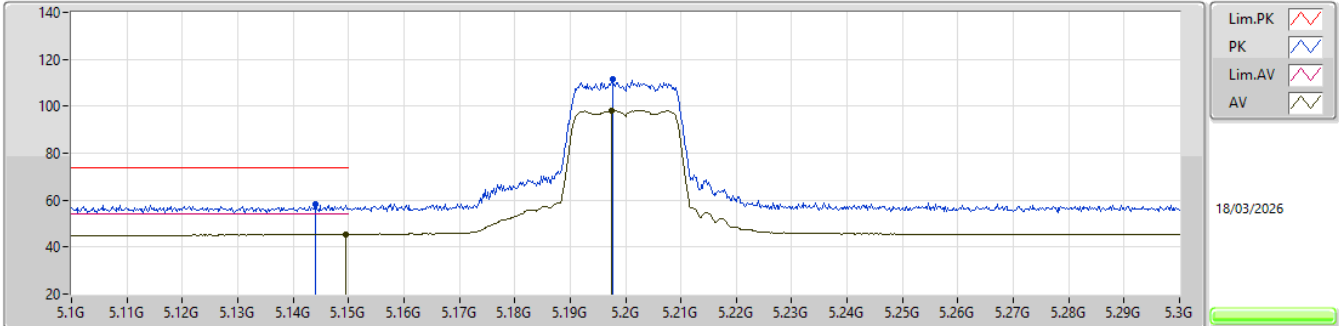


EUT_Y_1TX
Setting 16.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.144G	58.09	74.00	-15.91	47.04	3	Vertical	87	2.91	-	33.59	7.58	30.12				
AV	5.1496G	45.50	54.00	-8.50	34.45	3	Vertical	87	2.91	-	33.60	7.58	30.13				
PK	5.1976G	111.37	Inf	-Inf	100.23	3	Vertical	87	2.91	-	33.70	7.59	30.15				
AV	5.1974G	98.24	Inf	-Inf	87.11	3	Vertical	87	2.91	-	33.69	7.59	30.15				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

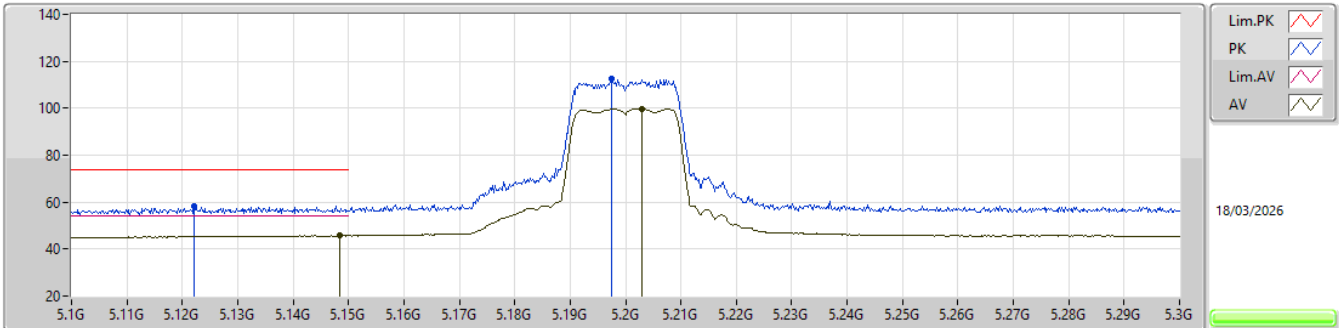


EUT_Y_1TX
Setting 16.5
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1222G	58.52	74.00	-15.48	47.52	3	Horizontal	304	1.92	-	33.54	7.57	30.11			
AV	5.1484G	45.71	54.00	-8.29	34.66	3	Horizontal	304	1.92	-	33.60	7.58	30.13			
PK	5.1974G	112.44	Inf	-Inf	101.31	3	Horizontal	304	1.92	-	33.69	7.59	30.15			
AV	5.203G	99.89	Inf	-Inf	88.76	3	Horizontal	304	1.92	-	33.70	7.59	30.16			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

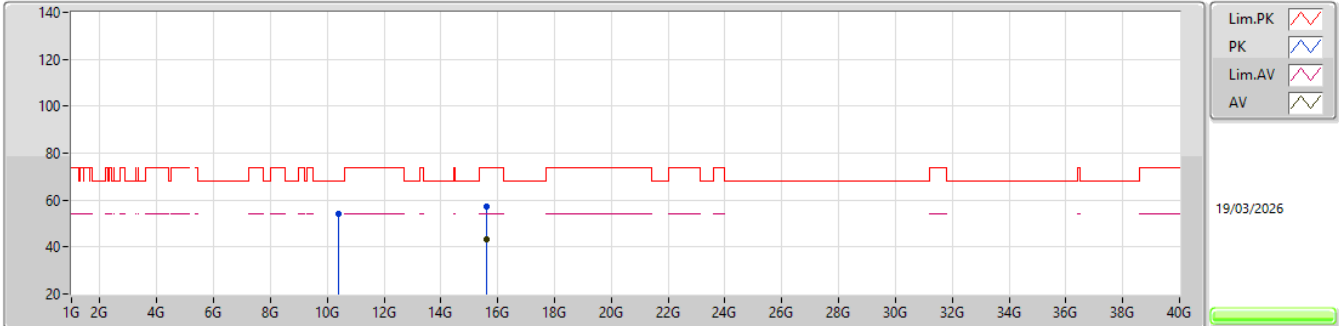


EUT_Y_1TX
Setting 16.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40088G	53.99	68.20	-14.21	70.40	3	Vertical	45	1.89	-	38.30	11.98	66.69			
PK	15.59814G	57.28	74.00	-16.72	68.85	3	Vertical	264	1.76	-	37.80	14.48	63.85			
AV	15.59511G	43.08	54.00	-10.92	54.64	3	Vertical	264	1.76	-	37.81	14.48	63.85			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

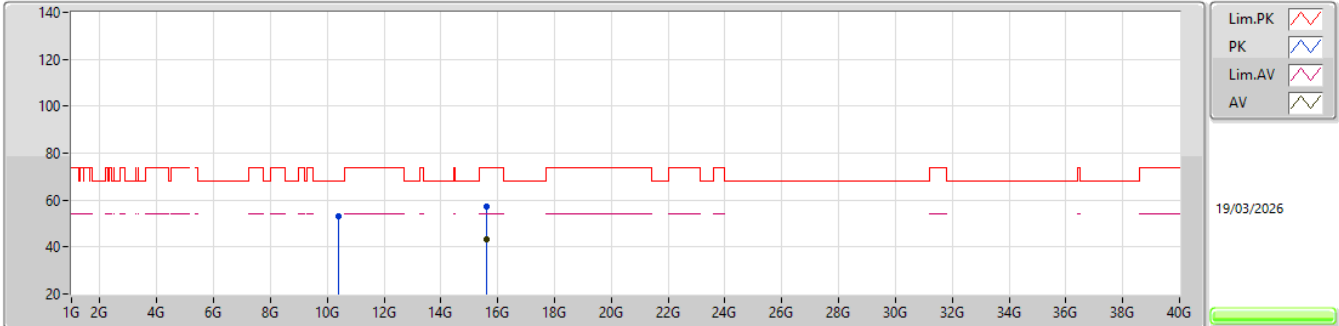


EUT_Y_1TX
Setting 16.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.3984G	53.21	68.20	-14.99	69.62	3	Horizontal	299	1.42	-	38.30	11.98	66.69				
PK	15.5976G	57.33	74.00	-16.67	68.90	3	Horizontal	162	2.70	-	37.80	14.48	63.85				
AV	15.595G	43.06	54.00	-10.94	54.62	3	Horizontal	162	2.70	-	37.81	14.48	63.85				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TX

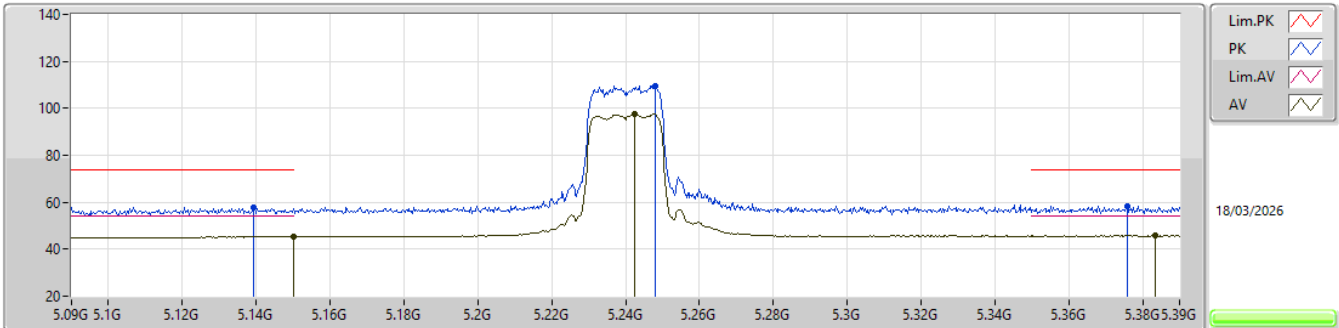


EUT Y_1TX
Setting 17
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1392G	57.87	74.00	-16.13	46.83	3	Vertical	29	1.80	-	33.58	7.58	30.12			
AV	5.15G	45.38	54.00	-8.62	34.33	3	Vertical	29	1.80	-	33.60	7.58	30.13			
PK	5.2481G	109.71	Inf	-Inf	98.56	3	Vertical	29	1.80	-	33.70	7.63	30.18			
AV	5.2424G	97.65	Inf	-Inf	86.51	3	Vertical	29	1.80	-	33.70	7.62	30.18			
PK	5.3759G	58.32	74.00	-15.68	46.95	3	Vertical	29	1.80	-	33.90	7.72	30.25			
AV	5.3834G	45.75	54.00	-8.25	34.37	3	Vertical	29	1.80	-	33.90	7.73	30.25			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5240MHz_TX

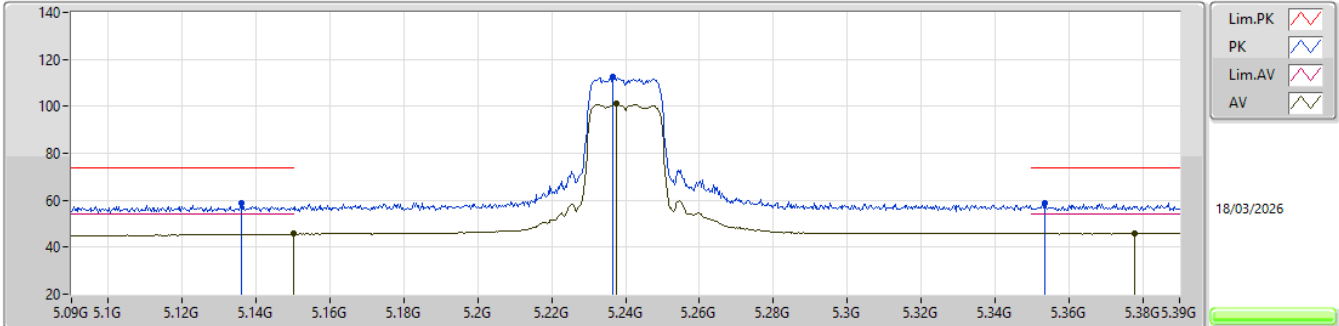EUT Y_1TX
Setting 17
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1359G	58.77	74.00	-15.23	47.74	3	Horizontal	304	1.91	-	33.57	7.58	30.12			
AV	5.15G	45.68	54.00	-8.32	34.63	3	Horizontal	304	1.91	-	33.60	7.58	30.13			
PK	5.2367G	112.61	Inf	-Inf	101.46	3	Horizontal	304	1.91	-	33.70	7.62	30.17			
AV	5.2376G	101.04	Inf	-Inf	89.89	3	Horizontal	304	1.91	-	33.70	7.62	30.17			
PK	5.3534G	58.88	74.00	-15.12	47.50	3	Horizontal	304	1.91	-	33.90	7.71	30.23			
AV	5.3777G	45.93	54.00	-8.07	34.56	3	Horizontal	304	1.91	-	33.90	7.72	30.25			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5240MHz_TX

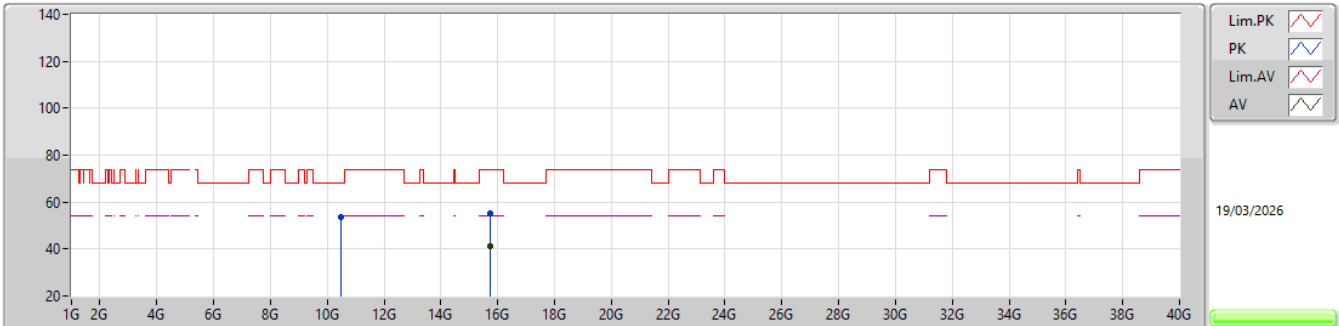EUT_Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47733G	53.83	68.20	-14.37	70.28	3	Vertical	157	1.55	-	38.25	12.02	66.72			
PK	15.71925G	55.33	74.00	-18.67	67.07	3	Vertical	89	2.27	-	37.56	14.59	63.89			
AV	15.71768G	41.25	54.00	-12.75	52.99	3	Vertical	89	2.27	-	37.56	14.59	63.89			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5240MHz_TX

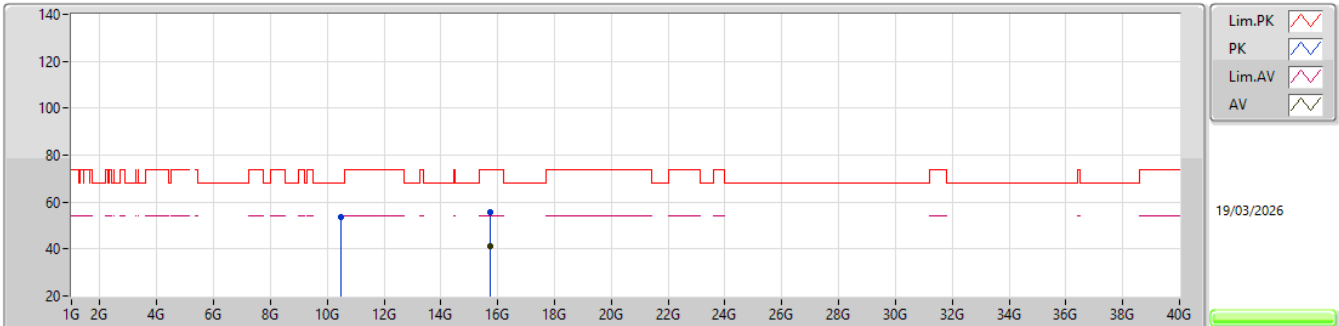EUT_Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48349G	53.79	68.20	-14.41	70.22	3	Horizontal	231	2.11	-	38.27	12.02	66.72			
PK	15.71963G	55.58	74.00	-18.42	67.32	3	Horizontal	256	2.74	-	37.56	14.59	63.89			
AV	15.7176G	41.22	54.00	-12.78	52.96	3	Horizontal	256	2.74	-	37.56	14.59	63.89			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5260MHz_TX

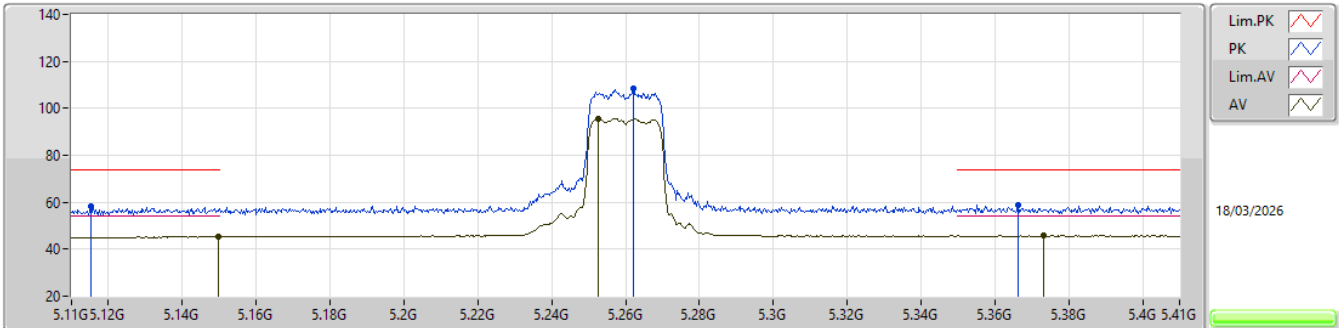EUT Y_1TX
Setting 16
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1151G	58.49	74.00	-15.51	47.50	3	Vertical	32	1.80	-	33.53	7.57	30.11			
AV	5.1496G	45.29	54.00	-8.71	34.24	3	Vertical	32	1.80	-	33.60	7.58	30.13			
PK	5.2621G	108.45	Inf	-Inf	97.28	3	Vertical	32	1.80	-	33.72	7.64	30.19			
AV	5.2525G	95.56	Inf	-Inf	84.40	3	Vertical	32	1.80	-	33.71	7.63	30.18			
PK	5.3662G	58.65	74.00	-15.35	47.28	3	Vertical	32	1.80	-	33.90	7.71	30.24			
AV	5.3731G	45.73	54.00	-8.27	34.35	3	Vertical	32	1.80	-	33.90	7.72	30.24			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5260MHz_TX

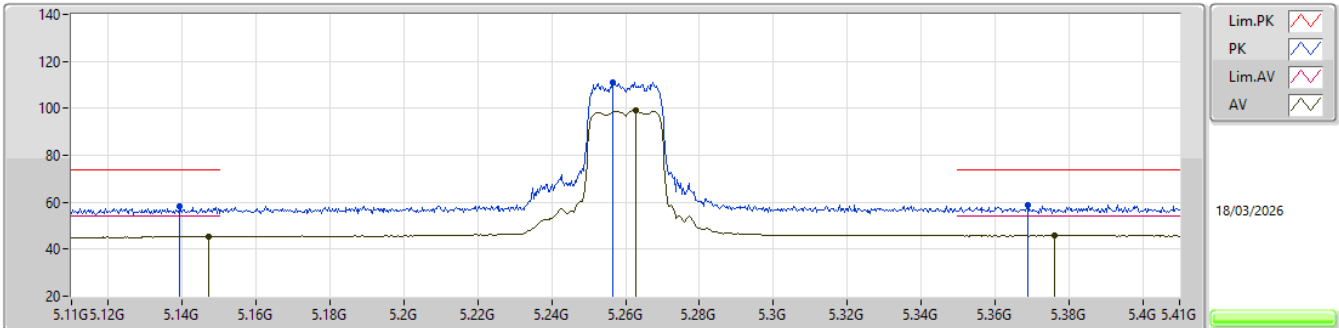EUT_Y_1TX
Setting 16
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1394G	58.32	74.00	-15.68	47.28	3	Horizontal	303	1.78	-	33.58	7.58	30.12
AV	5.1472G	45.44	54.00	-8.56	34.40	3	Horizontal	303	1.78	-	33.59	7.58	30.13
PK	5.2564G	111.28	Inf	-Inf	100.12	3	Horizontal	303	1.78	-	33.71	7.63	30.18
AV	5.2627G	99.14	Inf	-Inf	87.96	3	Horizontal	303	1.78	-	33.73	7.64	30.19
PK	5.3689G	58.76	74.00	-15.24	47.38	3	Horizontal	303	1.78	-	33.90	7.72	30.24
AV	5.3761G	45.90	54.00	-8.10	34.53	3	Horizontal	303	1.78	-	33.90	7.72	30.25

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TX

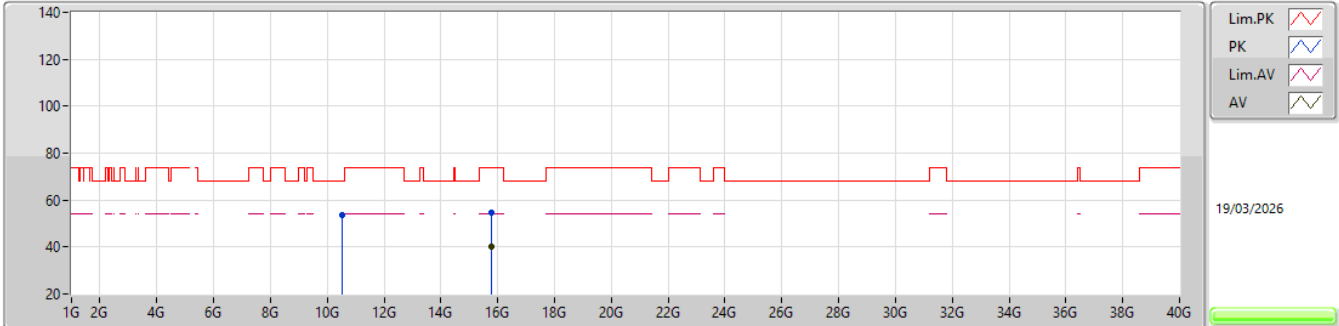


EUT_Y_1TX
Setting 16
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51881G	53.52	68.20	-14.68	69.89	3	Vertical	153	2.87	-	38.30	12.04	66.71			
PK	15.78411G	54.80	74.00	-19.20	66.65	3	Vertical	2	1.26	-	37.43	14.64	63.92			
AV	15.77574G	40.19	54.00	-13.81	52.01	3	Vertical	2	1.26	-	37.45	14.64	63.91			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5260MHz_TX

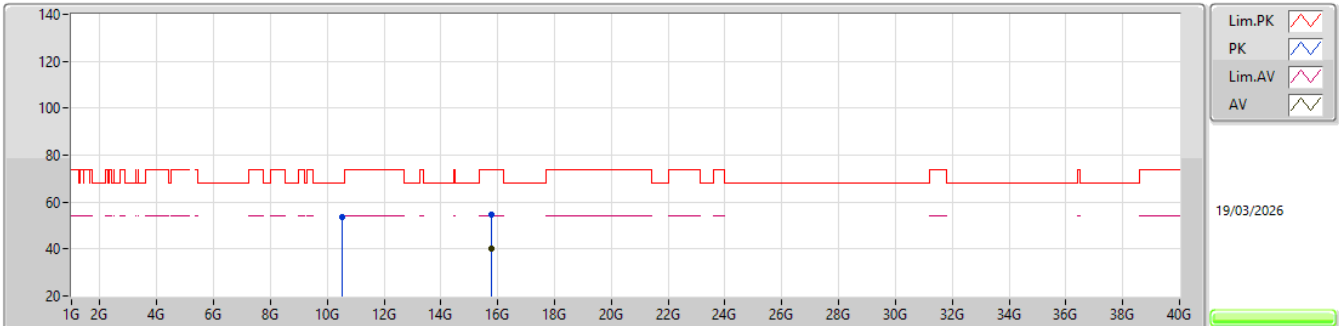EUT_Y_1TX
Setting 16
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51696G	53.41	68.20	-14.79	69.78	3	Horizontal	124	2.37	-	38.30	12.04	66.71			
PK	15.78078G	54.46	74.00	-19.54	66.30	3	Horizontal	160	2.95	-	37.44	14.64	63.92			
AV	15.77585G	40.20	54.00	-13.80	52.02	3	Horizontal	160	2.95	-	37.45	14.64	63.91			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

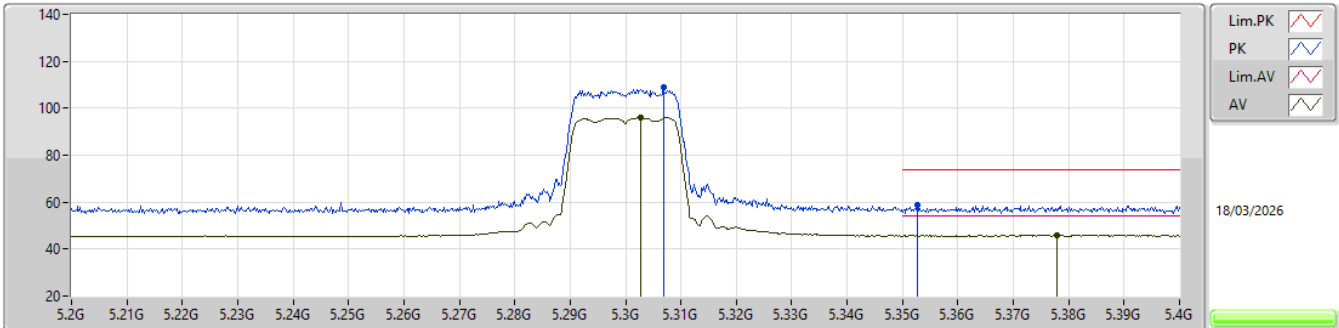


EUT_Y_1TX
Setting 16.5
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3068G	108.76	Inf	-Inf	97.49	3	Vertical	27	2.06	-	33.81	7.67	30.21				
AV	5.3028G	95.99	Inf	-Inf	84.72	3	Vertical	27	2.06	-	33.81	7.67	30.21				
PK	5.3526G	58.62	74.00	-15.38	47.25	3	Vertical	27	2.06	-	33.90	7.70	30.23				
AV	5.3778G	45.85	54.00	-8.15	34.48	3	Vertical	27	2.06	-	33.90	7.72	30.25				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

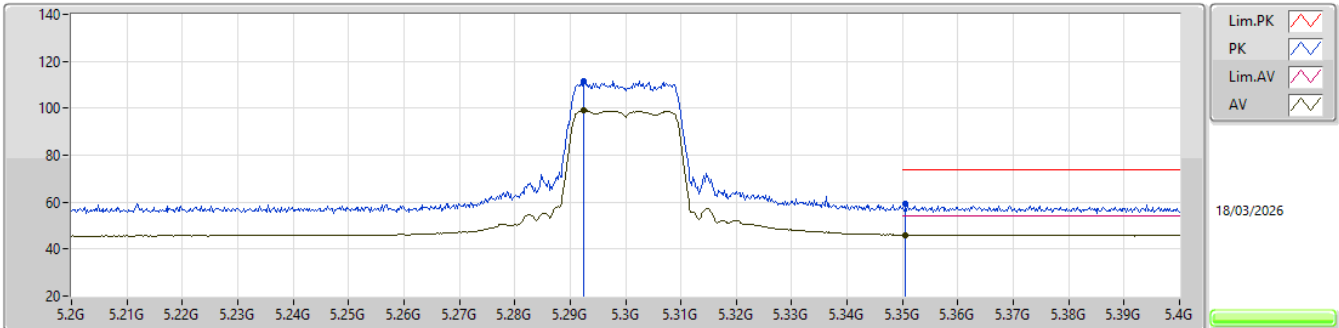


EUT_Y_1TX
Setting 16.5
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2924G	111.73	Inf	-Inf	100.49	3	Horizontal	304	1.87	-	33.78	7.66	30.20			
AV	5.2924G	99.33	Inf	-Inf	88.09	3	Horizontal	304	1.87	-	33.78	7.66	30.20			
PK	5.3506G	59.06	74.00	-14.94	47.69	3	Horizontal	304	1.87	-	33.90	7.70	30.23			
AV	5.3504G	46.08	54.00	-7.92	34.71	3	Horizontal	304	1.87	-	33.90	7.70	30.23			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

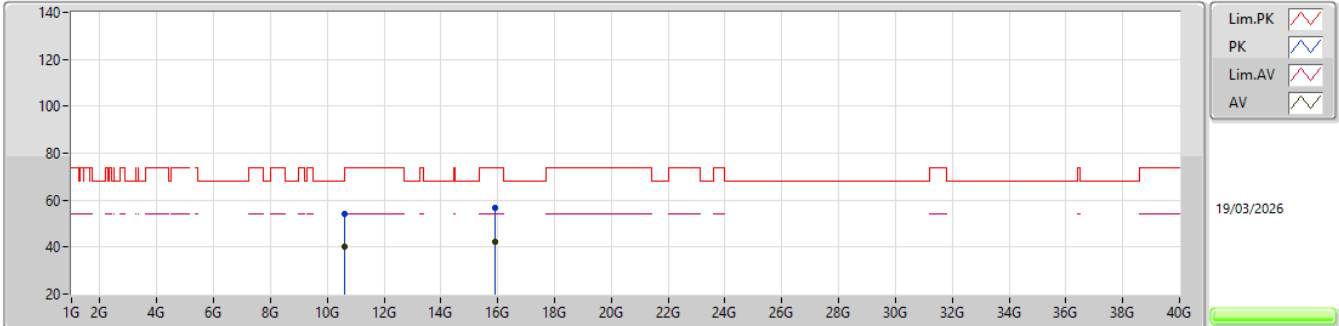


EUT_Y_1TX
Setting 16.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59847G	53.95	68.20	-14.25	70.09	3	Vertical	224	2.17	-	38.40	12.08	66.62			
AV	10.60063G	40.15	54.00	-13.85	56.29	3	Vertical	224	2.17	-	38.40	12.08	66.62			
PK	15.89938G	56.88	74.00	-17.12	68.40	3	Vertical	329	2.84	-	37.70	14.74	63.96			
AV	15.90335G	42.41	54.00	-11.59	53.93	3	Vertical	329	2.84	-	37.69	14.75	63.96			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

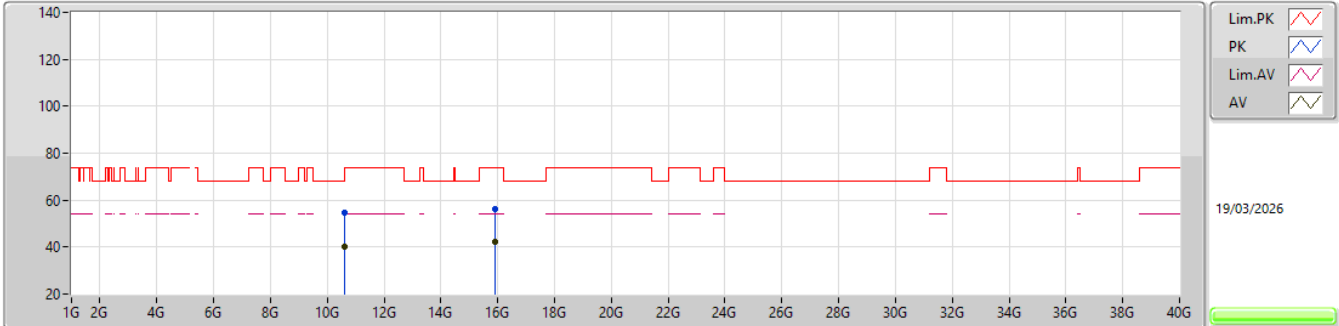


EUT_Y_1TX
Setting 16.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59944G	54.59	68.20	-13.61	70.73	3	Horizontal	84	1.24	-	38.40	12.08	66.62			
AV	10.60062G	40.09	54.00	-13.91	56.23	3	Horizontal	84	1.24	-	38.40	12.08	66.62			
PK	15.89659G	56.31	74.00	-17.69	67.84	3	Horizontal	209	1.90	-	37.69	14.74	63.96			
AV	15.90331G	42.47	54.00	-11.53	53.99	3	Horizontal	209	1.90	-	37.69	14.75	63.96			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

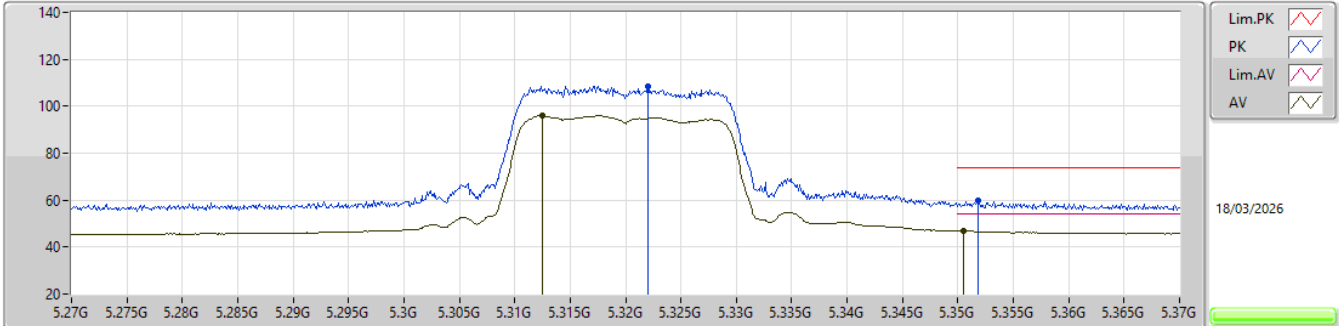


EUT_Y_1TX
Setting 16.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.322G	108.49	Inf	-Inf	97.19	3	Vertical	23	1.69	-	33.84	7.68	30.22			
AV	5.3125G	95.99	Inf	-Inf	84.71	3	Vertical	23	1.69	-	33.82	7.67	30.21			
PK	5.3518G	59.85	74.00	-14.15	48.48	3	Vertical	23	1.69	-	33.90	7.70	30.23			
AV	5.3505G	46.83	54.00	-7.17	35.46	3	Vertical	23	1.69	-	33.90	7.70	30.23			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

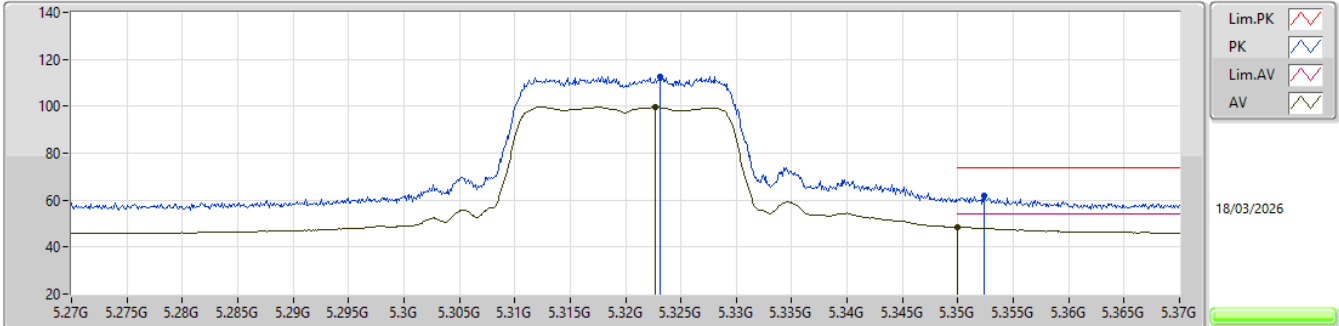


EUT Y_1TX
Setting 16.5
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3231G	112.64	Inf	-Inf	101.33	3	Horizontal	302	1.76	-	33.85	7.68	30.22				
AV	5.3227G	99.78	Inf	-Inf	88.47	3	Horizontal	302	1.76	-	33.85	7.68	30.22				
PK	5.3524G	62.12	74.00	-11.88	50.75	3	Horizontal	302	1.76	-	33.90	7.70	30.23				
AV	5.35G	48.46	54.00	-5.54	37.09	3	Horizontal	302	1.76	-	33.90	7.70	30.23				

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

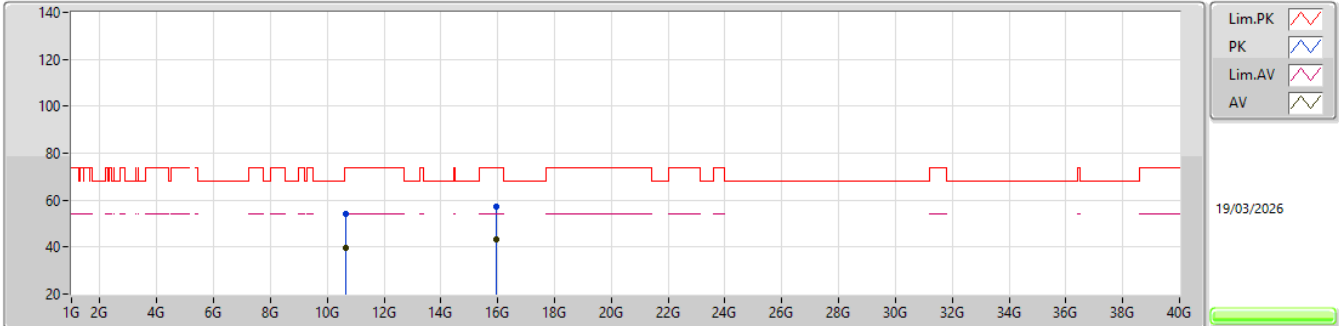


EUT_Y_1TX
Setting 16.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64228G	54.04	74.00	-19.96	70.12	3	Vertical	79	2.43	-	38.40	12.10	66.58			
AV	10.64285G	39.78	54.00	-14.22	55.86	3	Vertical	79	2.43	-	38.40	12.10	66.58			
PK	15.96439G	57.33	74.00	-16.67	69.02	3	Vertical	303	2.88	-	37.50	14.80	63.99			
AV	15.95777G	43.04	54.00	-10.96	54.73	3	Vertical	303	2.88	-	37.50	14.79	63.98			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

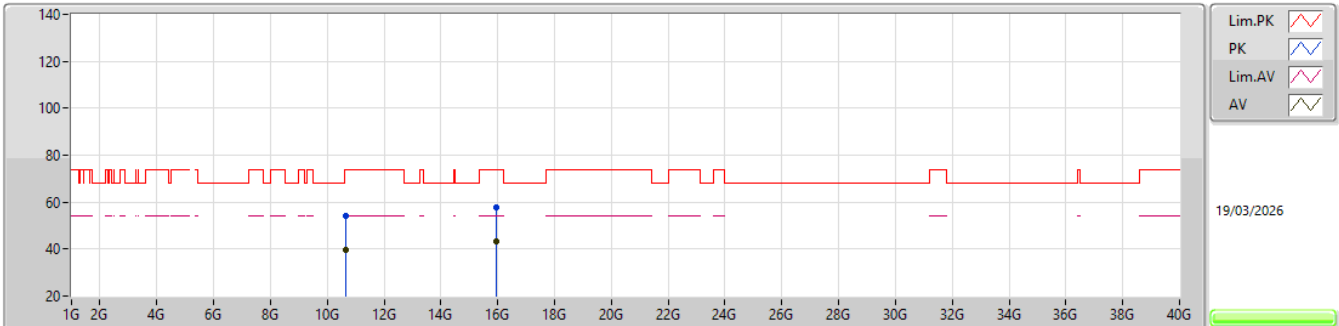


EUT_Y_1TX
Setting 16.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63753G	54.18	74.00	-19.82	70.26	3	Horizontal	51	2.68	-	38.40	12.10	66.58			
AV	10.64283G	39.69	54.00	-14.31	55.77	3	Horizontal	51	2.68	-	38.40	12.10	66.58			
PK	15.95979G	57.98	74.00	-16.02	69.66	3	Horizontal	347	2.57	-	37.50	14.80	63.98			
AV	15.95777G	43.15	54.00	-10.85	54.84	3	Horizontal	347	2.57	-	37.50	14.79	63.98			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

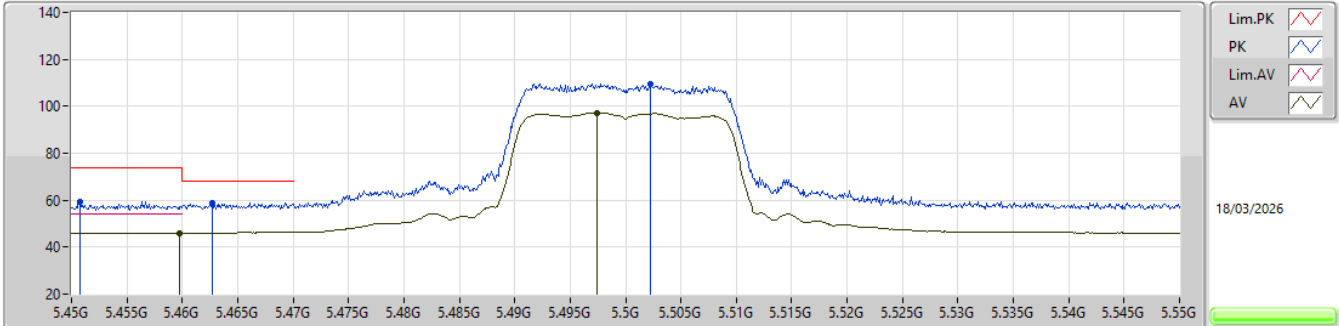


EUT Y_1TX
Setting 17
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4508G	59.53	74.00	-14.47	48.14	3	Vertical	143	1.88	-	33.90	7.77	30.28			
PK	5.4627G	58.82	68.20	-9.38	47.40	3	Vertical	143	1.88	-	33.93	7.78	30.29			
AV	5.4598G	46.02	54.00	-7.98	34.61	3	Vertical	143	1.88	-	33.92	7.78	30.29			
PK	5.5022G	109.61	Inf	-Inf	98.12	3	Vertical	143	1.88	-	34.00	7.80	30.31			
AV	5.4974G	97.32	Inf	-Inf	85.84	3	Vertical	143	1.88	-	33.99	7.80	30.31			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

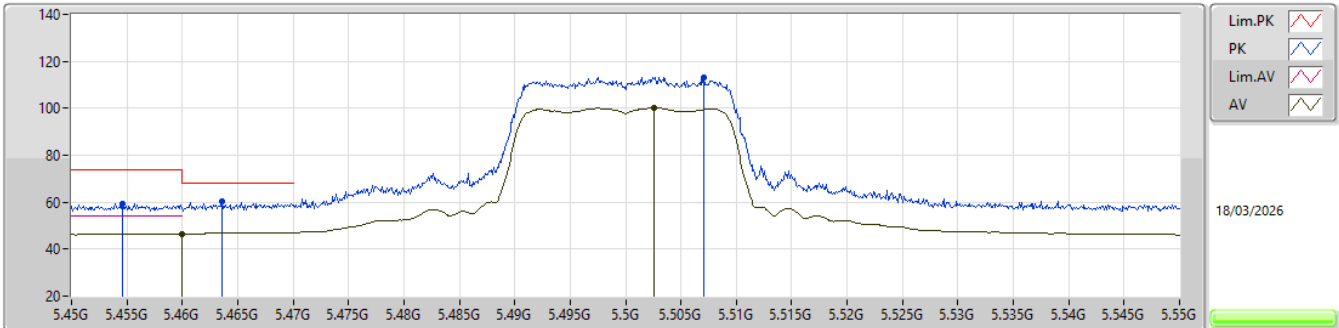


EUT Y_1TX
Setting 17
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4546G	59.55	74.00	-14.45	48.16	3	Horizontal	302	1.76	-	33.91	7.77	30.29			
PK	5.4636G	60.17	68.20	-8.03	48.75	3	Horizontal	302	1.76	-	33.93	7.78	30.29			
AV	5.46G	46.58	54.00	-7.42	35.17	3	Horizontal	302	1.76	-	33.92	7.78	30.29			
PK	5.5071G	113.24	Inf	-Inf	101.74	3	Horizontal	302	1.76	-	34.01	7.80	30.31			
AV	5.5026G	100.27	Inf	-Inf	88.77	3	Horizontal	302	1.76	-	34.01	7.80	30.31			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

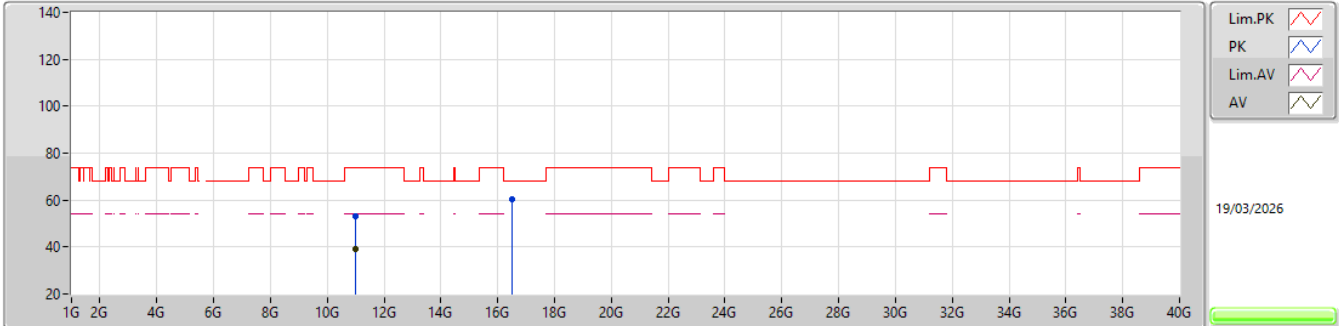


EUT_Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99801G	53.12	74.00	-20.88	68.63	3	Vertical	270	2.83	-	38.40	12.28	66.19			
AV	10.99513G	38.97	54.00	-15.03	54.49	3	Vertical	270	2.83	-	38.40	12.28	66.20			
PK	16.50179G	60.33	68.20	-7.87	70.33	3	Vertical	231	2.76	-	38.81	14.93	63.74			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

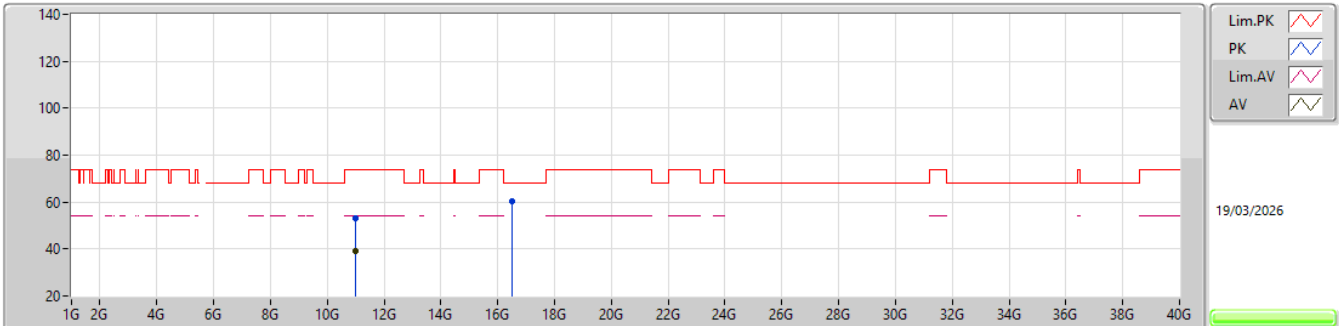


EUT Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00141G	53.05	74.00	-20.95	68.55	3	Horizontal	15	2.27	-	38.40	12.29	66.19			
AV	10.99542G	38.96	54.00	-15.04	54.47	3	Horizontal	15	2.27	-	38.40	12.28	66.19			
PK	16.49904G	60.21	68.20	-7.99	70.22	3	Horizontal	117	1.80	-	38.80	14.93	63.74			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

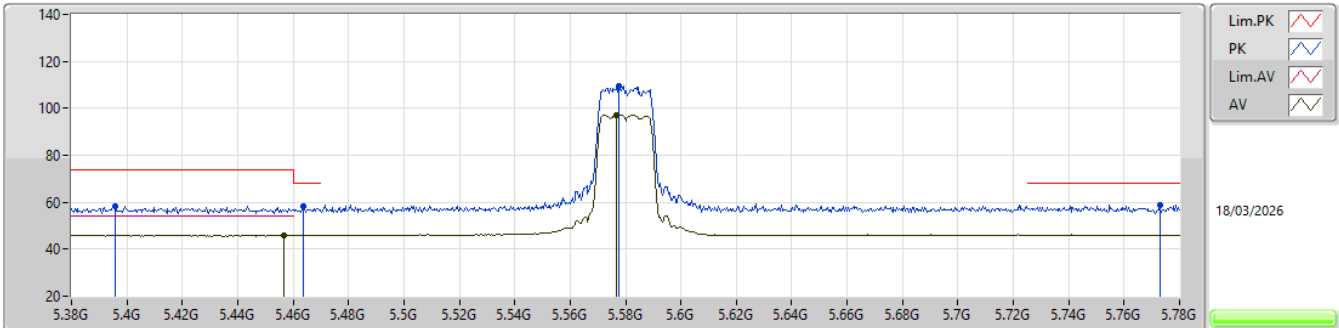


EUT_Y_1TX
Setting 17
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3956G	58.40	74.00	-15.60	47.02	3	Vertical	143	1.85	-	33.90	7.74	30.26
PK	5.4636G	58.11	68.20	-10.09	46.69	3	Vertical	143	1.85	-	33.93	7.78	30.29
AV	5.4568G	45.83	54.00	-8.17	34.44	3	Vertical	143	1.85	-	33.91	7.77	30.29
PK	5.5776G	109.67	Inf	-Inf	98.06	3	Vertical	143	1.85	-	34.04	7.85	30.28
AV	5.5768G	97.24	Inf	-Inf	85.62	3	Vertical	143	1.85	-	34.05	7.85	30.28
PK	5.7728G	58.95	68.20	-9.25	47.00	3	Vertical	143	1.85	-	34.00	8.16	30.21

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5580MHz_TX

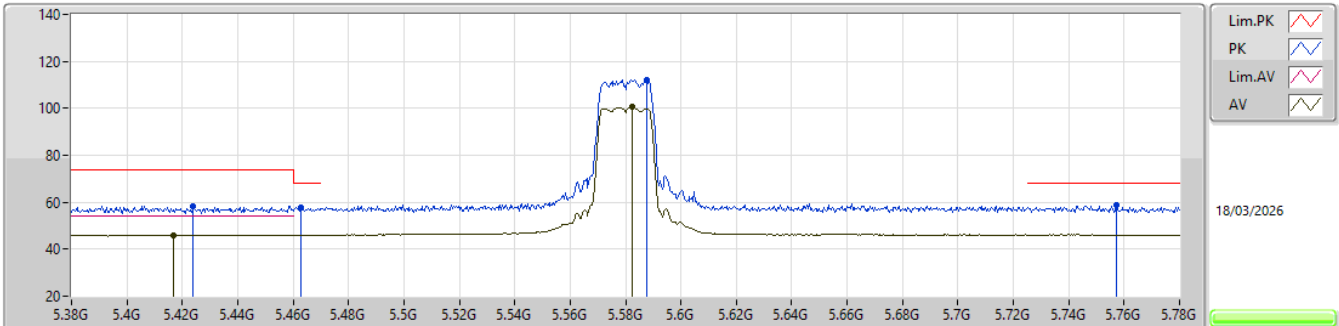EUT_Y_1TX
Setting 17
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.424G	58.39	74.00	-15.61	47.01	3	Horizontal	191	1.82	-	33.90	7.75	30.27			
AV	5.4168G	45.95	54.00	-8.05	34.57	3	Horizontal	191	1.82	-	33.90	7.75	30.27			
PK	5.4628G	57.81	68.20	-10.39	46.39	3	Horizontal	191	1.82	-	33.93	7.78	30.29			
PK	5.5876G	111.95	Inf	-Inf	100.36	3	Horizontal	191	1.82	-	34.02	7.85	30.28			
AV	5.5824G	100.45	Inf	-Inf	88.84	3	Horizontal	191	1.82	-	34.04	7.85	30.28			
PK	5.7572G	58.59	68.20	-9.61	46.67	3	Horizontal	191	1.82	-	34.00	8.14	30.22			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5580MHz_TX

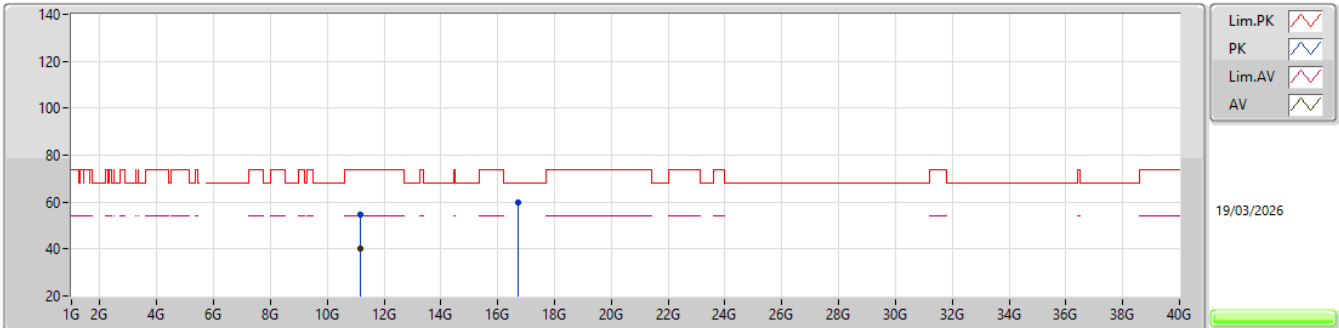EUT Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15832G	54.75	74.00	-19.25	70.08	3	Vertical	107	1.98	-	38.50	12.36	66.19			
AV	11.16405G	40.34	54.00	-13.66	55.66	3	Vertical	107	1.98	-	38.50	12.37	66.19			
PK	16.73999G	59.70	68.20	-8.50	68.74	3	Vertical	286	1.83	-	39.98	14.98	64.00			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5580MHz_TX

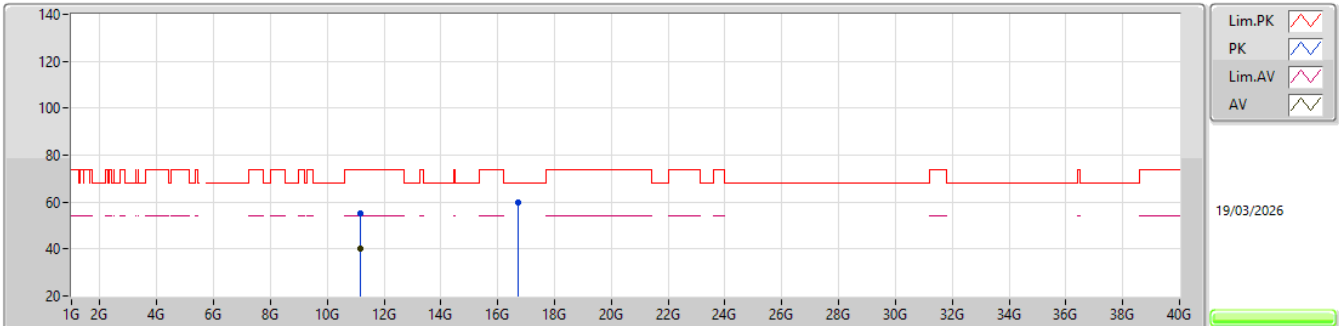EUT Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15536G	55.06	74.00	-18.94	70.39	3	Horizontal	157	2.99	-	38.50	12.36	66.19			
AV	11.16419G	40.31	54.00	-13.69	55.63	3	Horizontal	157	2.99	-	38.50	12.37	66.19			
PK	16.73853G	59.95	68.20	-8.25	68.99	3	Horizontal	317	2.20	-	39.98	14.98	64.00			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5600MHz_TX

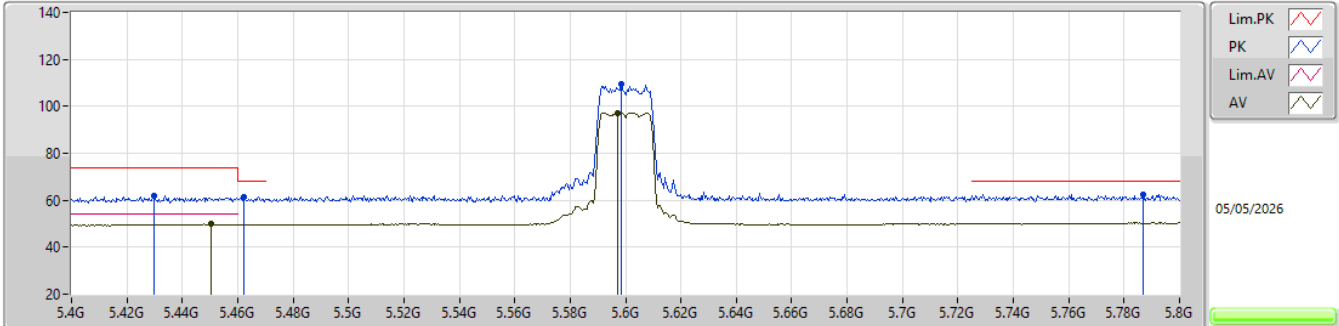


EUT_Y_1TX
Setting 19.5
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4296G	61.97	74.00	-12.03	54.92	3	Vertical	22	1.96	-	34.70	7.22	34.87			
PK	5.462G	61.49	68.20	-6.71	54.41	3	Vertical	22	1.96	-	34.70	7.25	34.87			
AV	5.4504G	49.77	54.00	-4.23	42.70	3	Vertical	22	1.96	-	34.70	7.24	34.87			
PK	5.5984G	109.25	Inf	-Inf	102.19	3	Vertical	22	1.96	-	34.60	7.35	34.89			
AV	5.5972G	97.31	Inf	-Inf	90.26	3	Vertical	22	1.96	-	34.59	7.35	34.89			
PK	5.7868G	62.47	68.20	-5.73	55.69	3	Vertical	22	1.96	-	34.23	7.50	34.95			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5600MHz_TX

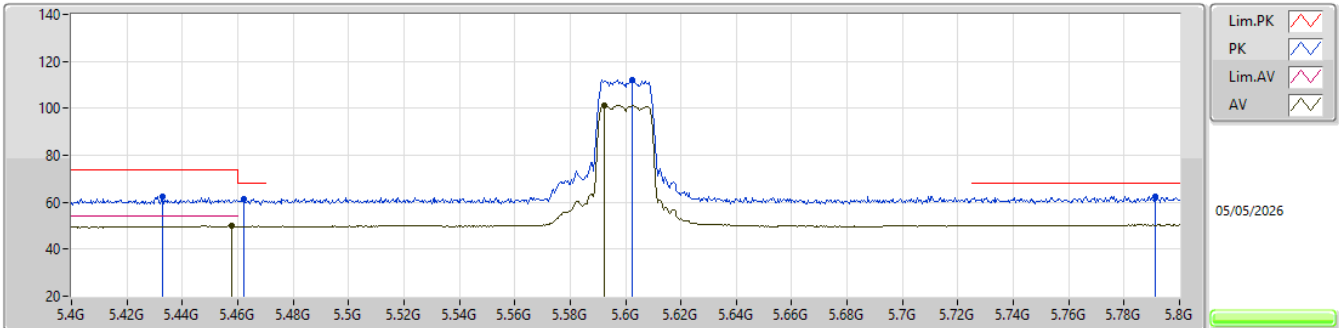


EUT_Y_1TX
Setting 19.5
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4328G	62.30	74.00	-11.70	55.25	3	Horizontal	317	1.93	-	34.70	7.22	34.87			
PK	5.462G	61.43	68.20	-6.77	54.35	3	Horizontal	317	1.93	-	34.70	7.25	34.87			
AV	5.458G	49.80	54.00	-4.20	42.73	3	Horizontal	317	1.93	-	34.70	7.24	34.87			
PK	5.6024G	112.31	Inf	-Inf	105.25	3	Horizontal	317	1.93	-	34.60	7.35	34.89			
AV	5.5924G	101.18	Inf	-Inf	94.15	3	Horizontal	317	1.93	-	34.58	7.34	34.89			
PK	5.7912G	62.49	68.20	-5.71	55.72	3	Horizontal	317	1.93	-	34.22	7.50	34.95			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5600MHz_TX

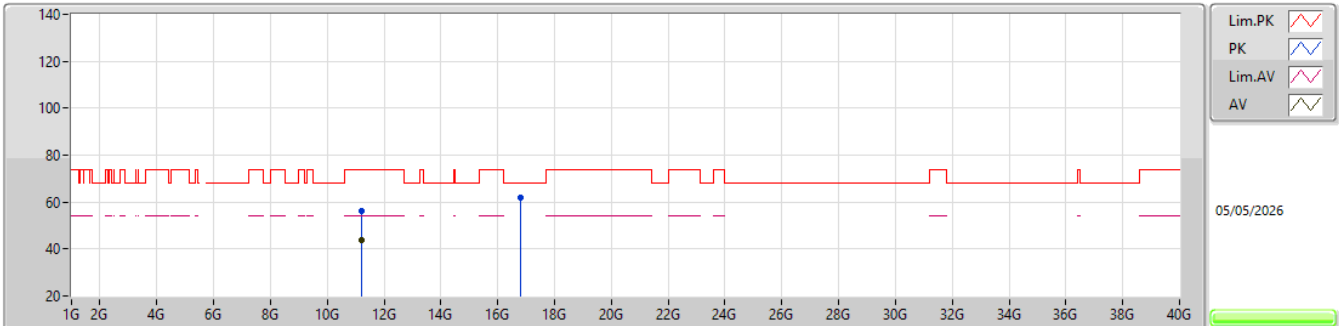EUT_Y_1TX
Setting 19.5
03-R-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.188G	56.25	74.00	-17.75	42.03	3	Vertical	315	1.71	-	38.60	10.65	35.03			
AV	11.19545G	43.94	54.00	-10.06	29.72	3	Vertical	315	1.71	-	38.60	10.65	35.03			
PK	16.816G	61.73	68.20	-6.47	44.18	3	Vertical	209	2.21	-	39.33	12.75	34.53			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5600MHz_TX

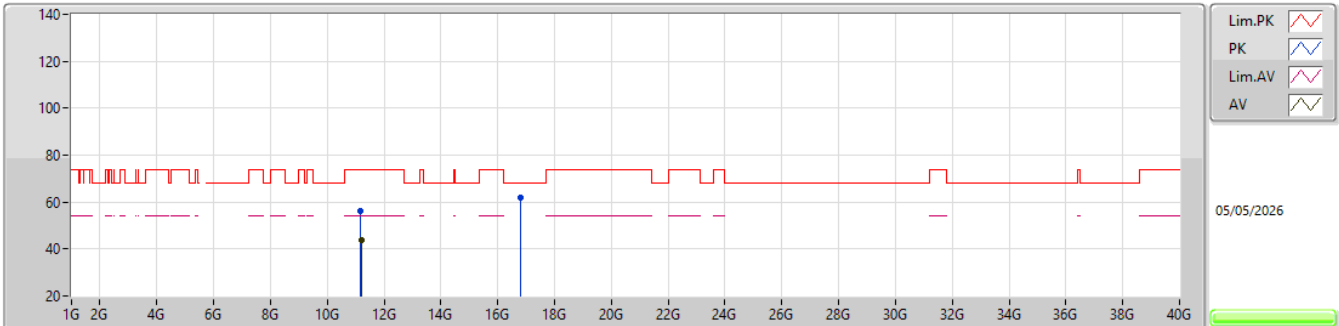EUT_Y_1TX
Setting 19.5
03-R-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.18715G	56.12	74.00	-17.88	41.90	3	Horizontal	313	1.19	-	38.60	10.65	35.03			
AV	11.1934G	43.98	54.00	-10.02	29.76	3	Horizontal	313	1.19	-	38.60	10.65	35.03			
PK	16.80825G	61.79	68.20	-6.41	44.26	3	Horizontal	312	2.68	-	39.32	12.75	34.54			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TX

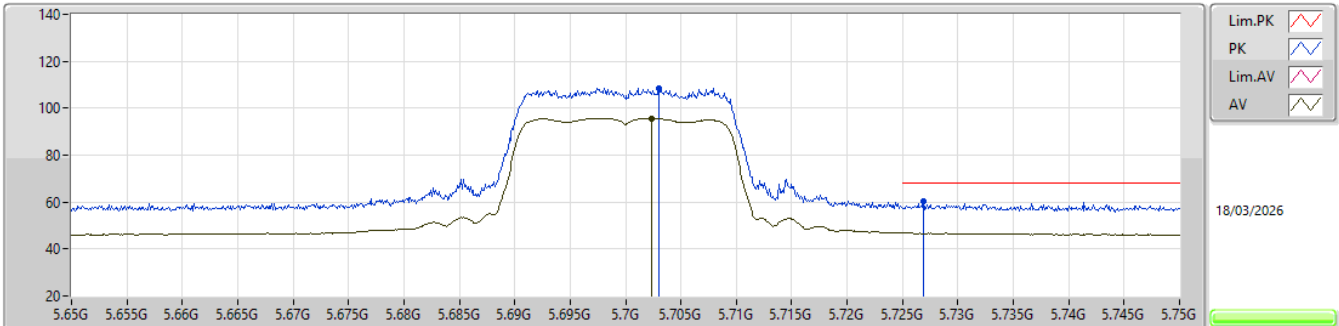


EUT Y_1TX
Setting 17
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.703G	108.68	Inf	-Inf	96.88	3	Vertical	145	1.80	-	34.00	8.04	30.24				
AV	5.7024G	95.75	Inf	-Inf	83.95	3	Vertical	145	1.80	-	34.00	8.04	30.24				
PK	5.7269G	60.11	68.20	-8.09	48.26	3	Vertical	145	1.80	-	34.00	8.08	30.23				

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5700MHz_TX

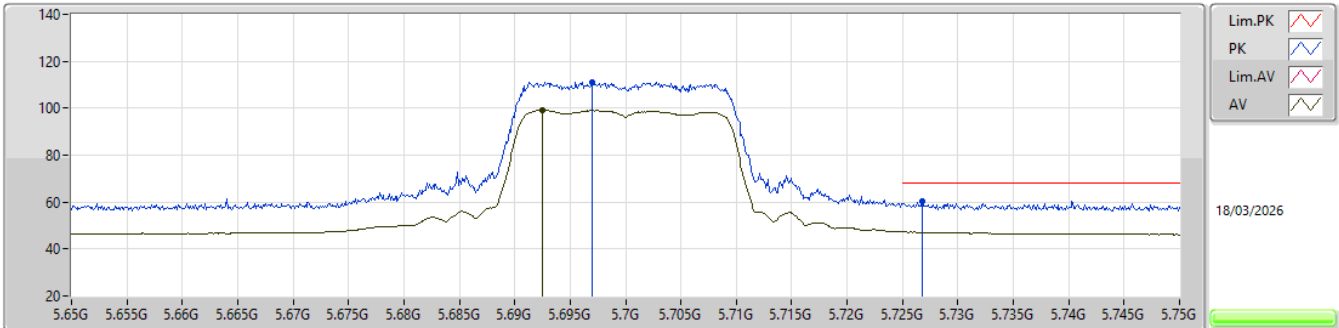EUT_Y_1TX
Setting 17
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.697G	111.26	Inf	-Inf	99.47	3	Horizontal	191	1.88	-	34.00	8.03	30.24			
AV	5.6925G	99.22	Inf	-Inf	87.44	3	Horizontal	191	1.88	-	34.00	8.02	30.24			
PK	5.7268G	60.50	68.20	-7.70	48.65	3	Horizontal	191	1.88	-	34.00	8.08	30.23			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TX

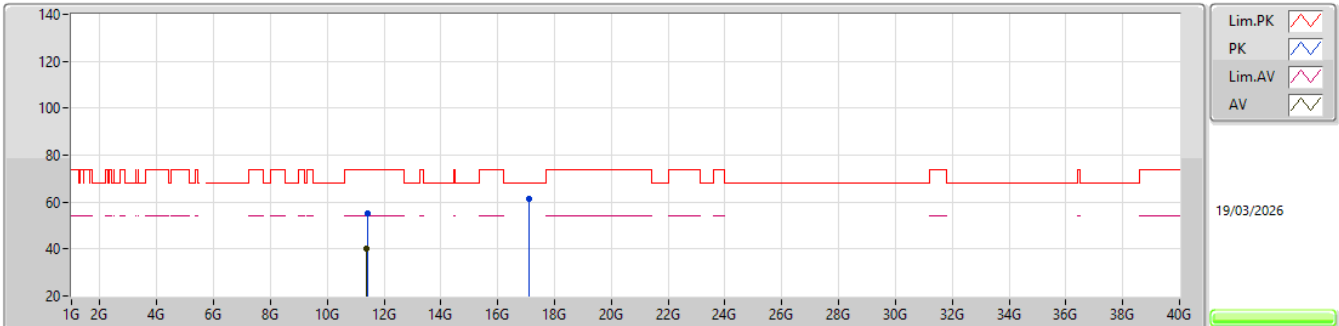


EUT_Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4021G	55.13	74.00	-18.87	70.14	3	Vertical	284	1.82	-	38.70	12.49	66.20			
AV	11.39948G	40.36	54.00	-13.64	55.37	3	Vertical	284	1.82	-	38.70	12.49	66.20			
PK	17.10276G	61.49	68.20	-6.71	69.30	3	Vertical	129	2.92	-	41.41	15.06	64.28			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5700MHz_TX

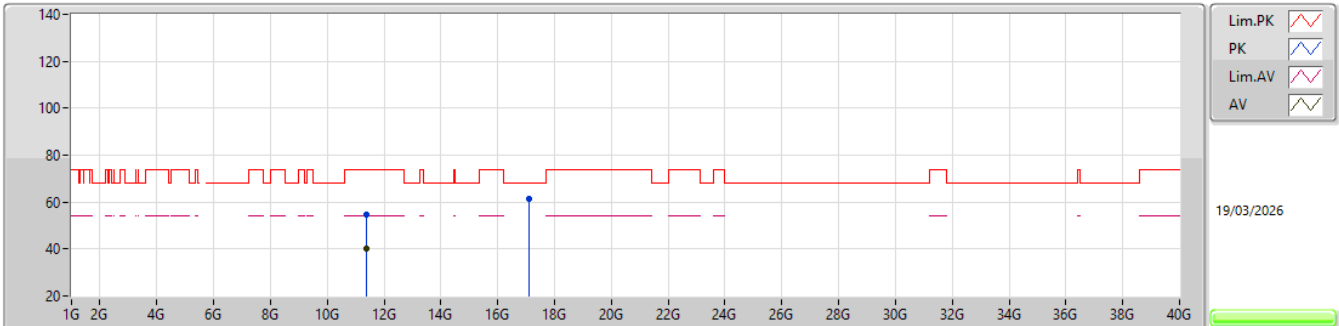EUT_Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40059G	54.66	74.00	-19.34	69.67	3	Horizontal	360	2.44	-	38.70	12.49	66.20			
AV	11.39973G	40.28	54.00	-13.72	55.29	3	Horizontal	360	2.44	-	38.70	12.49	66.20			
PK	17.09657G	61.24	68.20	-6.96	69.08	3	Horizontal	76	2.85	-	41.39	15.05	64.28			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

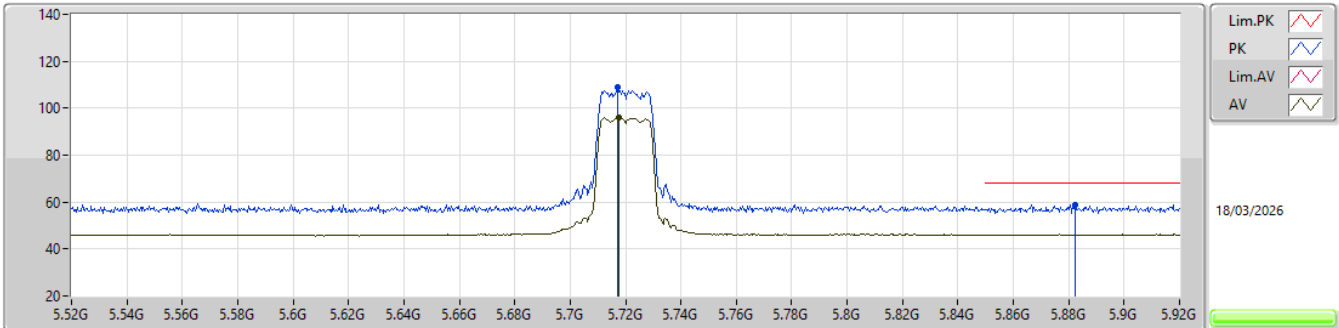


EUT_Y_1TX
Setting 17
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7172G	109.03	Inf	-Inf	97.19	3	Vertical	145	1.87	-	34.00	8.07	30.23			
AV	5.7176G	95.89	Inf	-Inf	84.05	3	Vertical	145	1.87	-	34.00	8.07	30.23			
PK	5.8824G	58.99	68.20	-9.21	46.96	3	Vertical	145	1.87	-	34.03	8.17	30.17			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

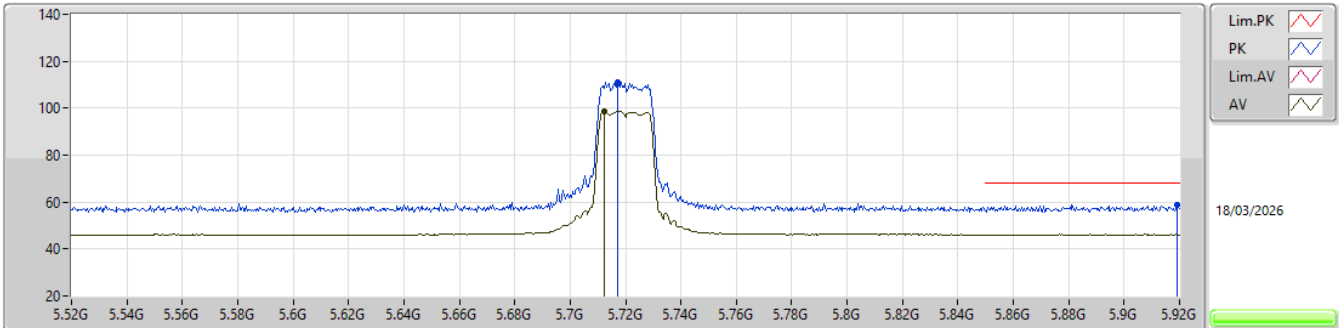


EUT Y_1TX
Setting 17
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7172G	111.24	Inf	-Inf	99.40	3	Horizontal	190	1.79	-	34.00	8.07	30.23			
AV	5.7124G	98.86	Inf	-Inf	87.03	3	Horizontal	190	1.79	-	34.00	8.06	30.23			
PK	5.9192G	58.80	68.20	-9.40	46.66	3	Horizontal	190	1.79	-	34.14	8.16	30.16			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

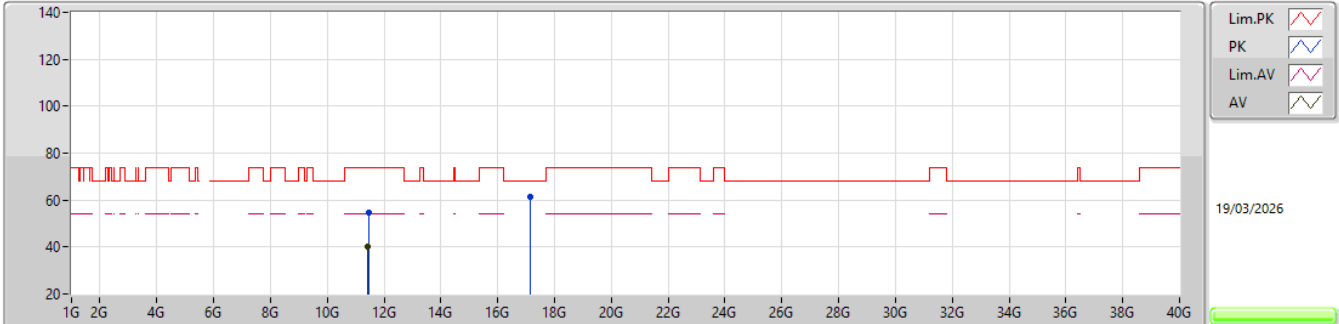


EUT Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44447G	54.47	74.00	-19.53	69.37	3	Vertical	198	1.25	-	38.79	12.51	66.20			
AV	11.43586G	40.29	54.00	-13.71	55.21	3	Vertical	198	1.25	-	38.77	12.51	66.20			
PK	17.16472G	61.20	68.20	-7.00	68.75	3	Vertical	109	2.30	-	41.66	15.07	64.28			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

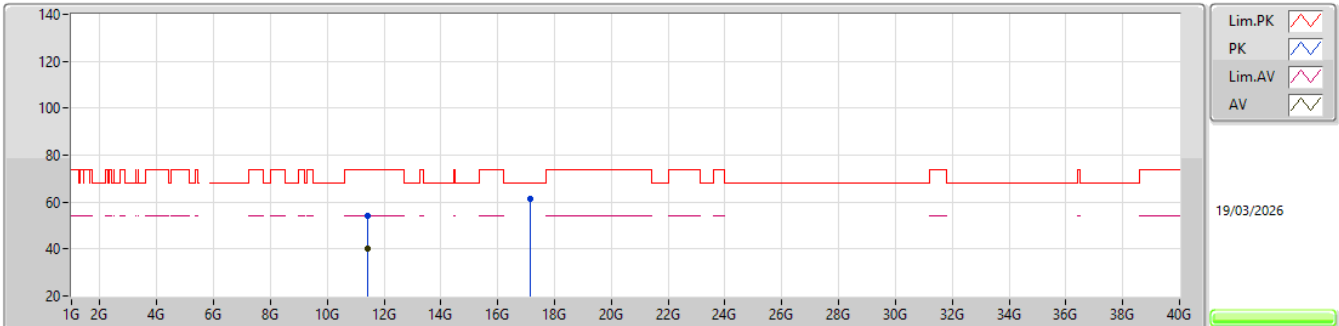EUT_Y_1TX
Setting 17
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44326G	54.39	74.00	-19.61	69.29	3	Horizontal	63	2.10	-	38.79	12.51	66.20			
AV	11.43579G	40.23	54.00	-13.77	55.15	3	Horizontal	63	2.10	-	38.77	12.51	66.20			
PK	17.16454G	61.32	68.20	-6.88	68.87	3	Horizontal	44	2.48	-	41.66	15.07	64.28			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5745MHz_TX

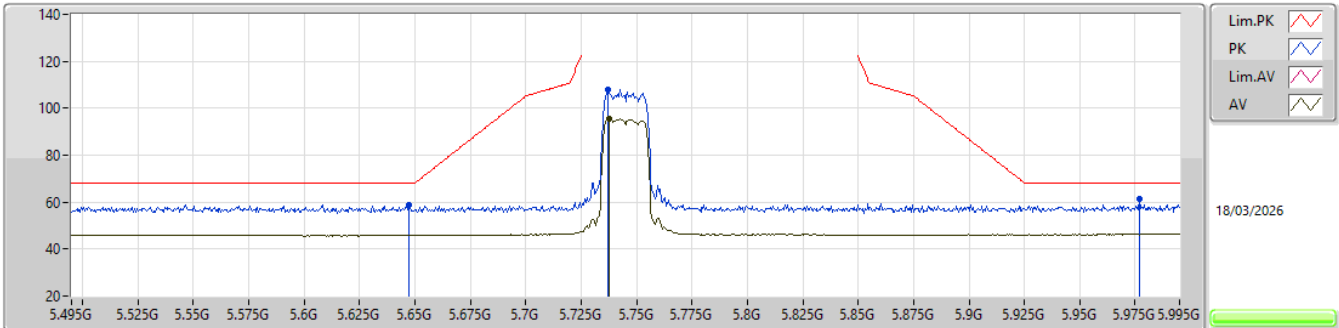EUT_Y_1TX
Setting 15
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.647G	58.74	68.20	-9.46	47.06	3	Vertical	146	1.77	-	34.00	7.94	30.26			
PK	5.737G	108.08	Inf	-Inf	96.20	3	Vertical	146	1.77	-	34.00	8.10	30.22			
AV	5.7375G	95.63	Inf	-Inf	83.75	3	Vertical	146	1.77	-	34.00	8.10	30.22			
PK	5.977G	61.15	68.20	-7.05	48.91	3	Vertical	146	1.77	-	34.25	8.13	30.14			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5745MHz_TX

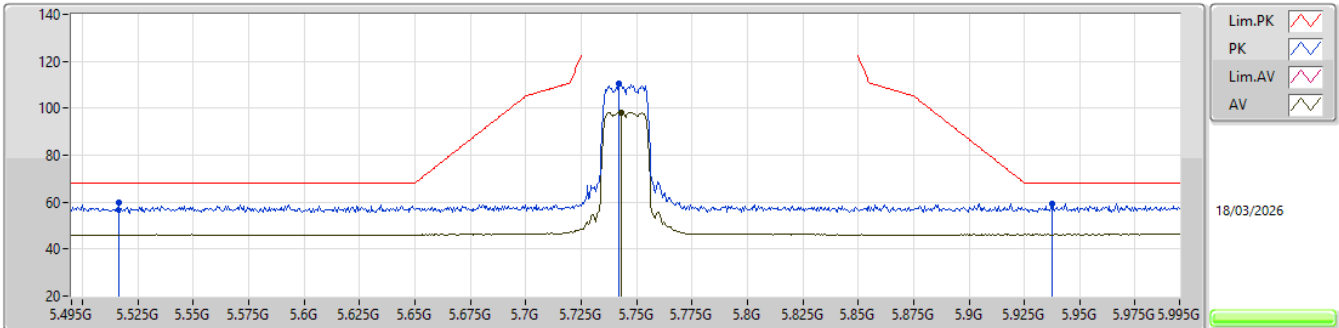EUT Y_1TX
Setting 15
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.5165G	59.69	68.20	-8.51	48.15	3	Horizontal	191	1.80	-	34.03	7.81	30.30			
PK	5.742G	110.36	Inf	-Inf	98.47	3	Horizontal	191	1.80	-	34.00	8.11	30.22			
AV	5.743G	98.22	Inf	-Inf	86.33	3	Horizontal	191	1.80	-	34.00	8.11	30.22			
PK	5.9375G	59.30	68.20	-8.90	47.12	3	Horizontal	191	1.80	-	34.18	8.15	30.15			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5745MHz_TX

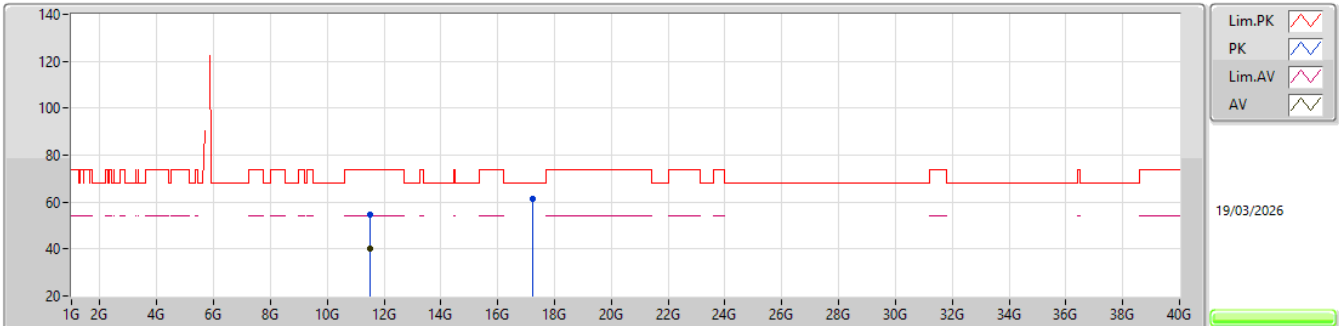EUT Y_1TX
Setting 15
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49315G	54.71	74.00	-19.29	69.41	3	Vertical	16	1.00	-	38.97	12.53	66.20			
AV	11.49489G	40.42	54.00	-13.58	55.11	3	Vertical	16	1.00	-	38.98	12.53	66.20			
PK	17.23444G	61.17	68.20	-7.03	68.36	3	Vertical	275	2.07	-	42.01	15.08	64.28			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5745MHz_TX

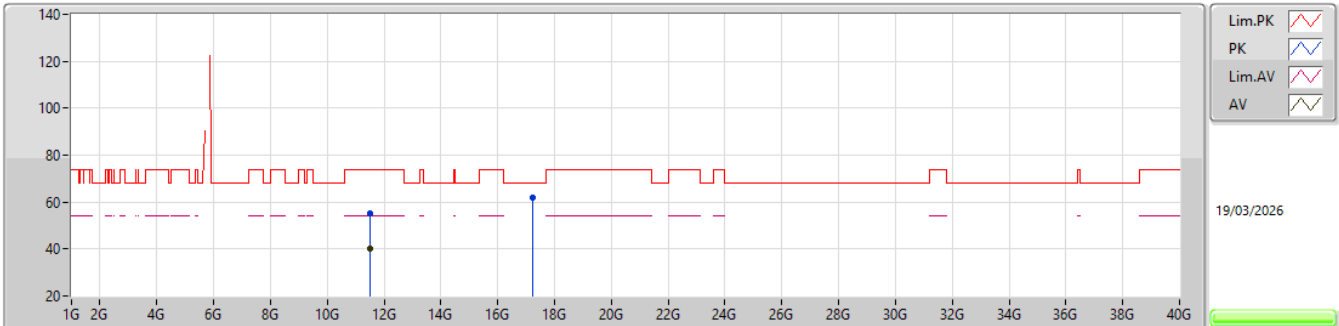EUT_Y_1TX
Setting 15
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49475G	55.37	74.00	-18.63	70.06	3	Horizontal	334	1.92	-	38.98	12.53	66.20			
AV	11.495G	40.39	54.00	-13.61	55.08	3	Horizontal	334	1.92	-	38.98	12.53	66.20			
PK	17.23936G	61.71	68.20	-6.49	68.87	3	Horizontal	59	2.21	-	42.04	15.08	64.28			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TX

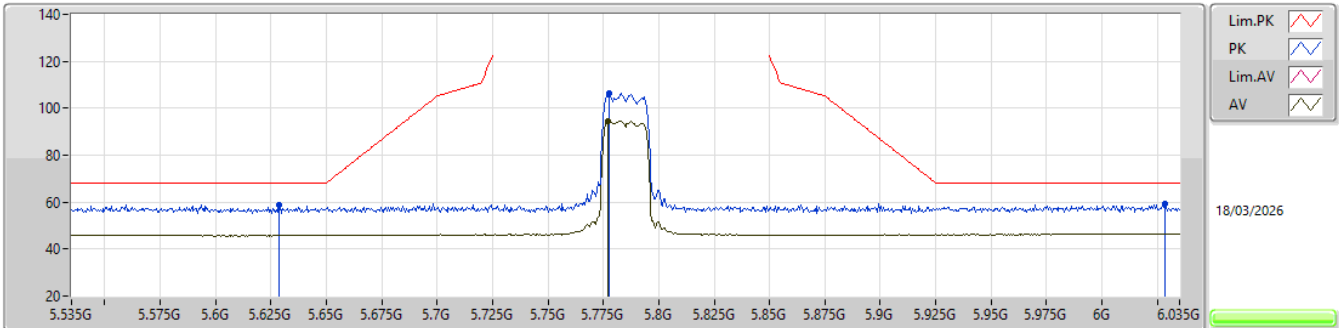


EUT_Y_1TX
Setting 15
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6285G	58.90	68.20	-9.30	47.25	3	Vertical	146	1.77	-	34.00	7.91	30.26				
PK	5.7775G	106.44	Inf	-Inf	94.48	3	Vertical	146	1.77	-	34.00	8.17	30.21				
AV	5.777G	94.62	Inf	-Inf	82.66	3	Vertical	146	1.77	-	34.00	8.17	30.21				
PK	6.0285G	59.20	68.20	-9.00	46.88	3	Vertical	146	1.77	-	34.36	8.10	30.14				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TX

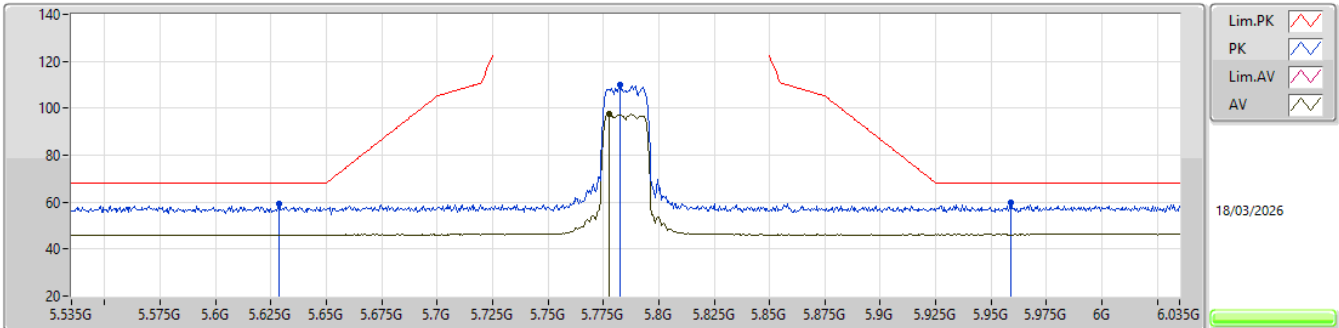


EUT_Y_1TX
Setting 15
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6285G	59.34	68.20	-8.86	47.69	3	Horizontal	191	1.77	-	34.00	7.91	30.26			
PK	5.7825G	109.79	Inf	-Inf	97.82	3	Horizontal	191	1.77	-	34.00	8.18	30.21			
AV	5.7775G	97.63	Inf	-Inf	85.67	3	Horizontal	191	1.77	-	34.00	8.17	30.21			
PK	5.959G	59.60	68.20	-8.60	47.38	3	Horizontal	191	1.77	-	34.22	8.14	30.14			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5785MHz_TX

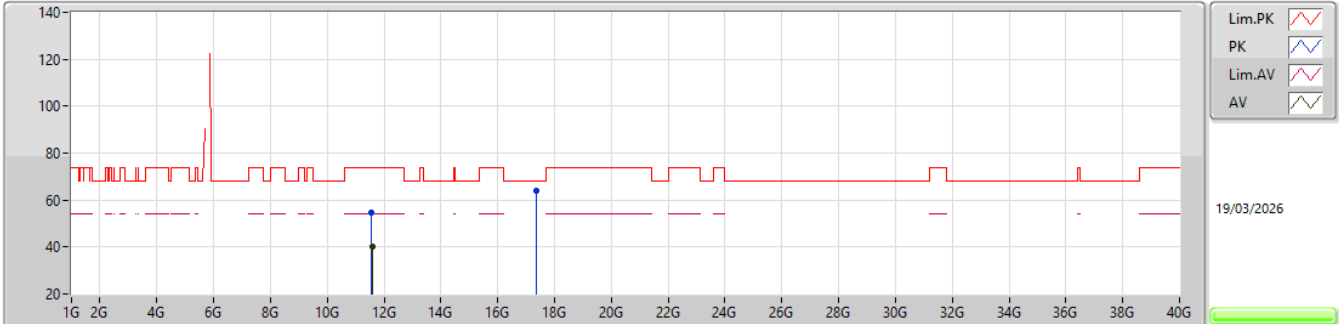EUT Y_1TX
Setting 15
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57041G	54.67	74.00	-19.33	69.10	3	Vertical	53	2.72	-	39.14	12.57	66.14			
AV	11.57337G	40.39	54.00	-13.61	54.80	3	Vertical	53	2.72	-	39.15	12.57	66.13			
PK	17.35949G	63.96	68.20	-4.24	70.18	3	Vertical	206	1.51	-	42.94	15.11	64.27			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TX

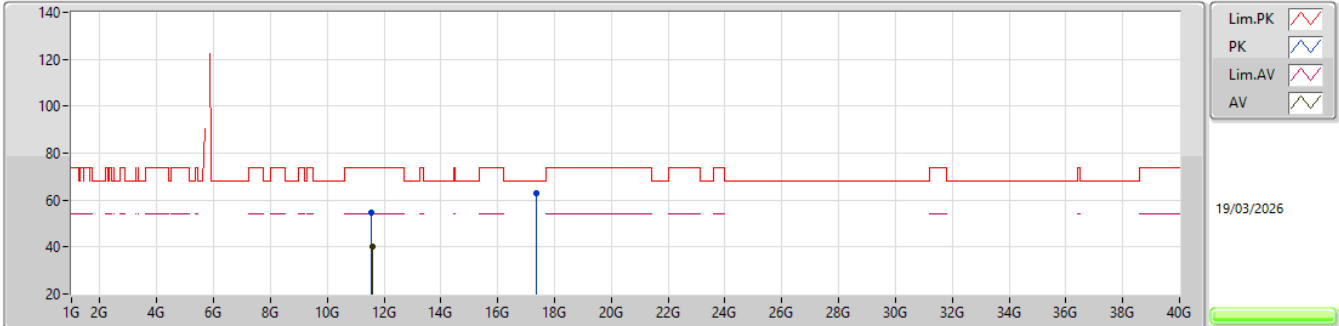


EUT Y_1TX
Setting 15
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57026G	54.59	74.00	-19.41	69.02	3	Horizontal	328	2.85	-	39.14	12.57	66.14			
AV	11.5733G	40.31	54.00	-13.69	54.72	3	Horizontal	328	2.85	-	39.15	12.57	66.13			
PK	17.3526G	62.94	68.20	-5.26	69.19	3	Horizontal	38	1.02	-	42.91	15.11	64.27			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TX

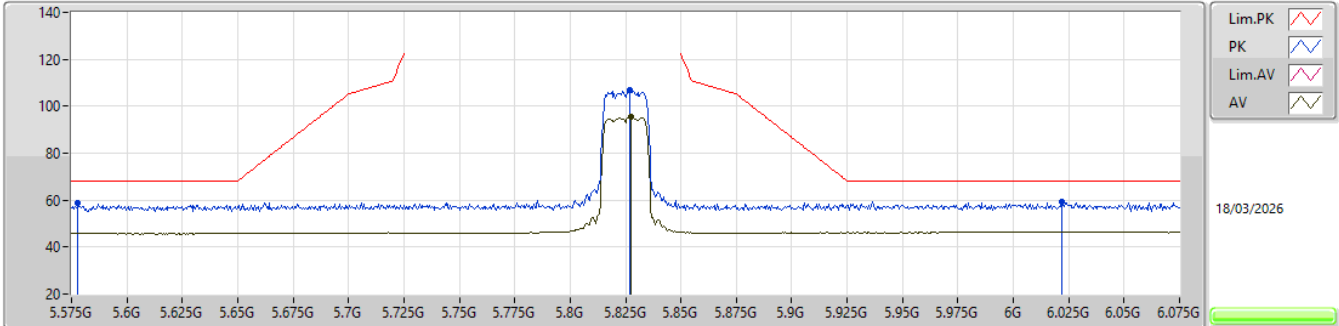


EUT_Y_1TX
Setting 15.5
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.578G	58.59	68.20	-9.61	46.98	3	Vertical	20	1.83	-	34.04	7.85	30.28					
PK	5.827G	106.73	Inf	-Inf	94.77	3	Vertical	20	1.83	-	33.95	8.20	30.19					
AV	5.8275G	95.51	Inf	-Inf	83.55	3	Vertical	20	1.83	-	33.95	8.20	30.19					
PK	6.022G	59.50	68.20	-8.70	47.19	3	Vertical	20	1.83	-	34.34	8.11	30.14					

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TX

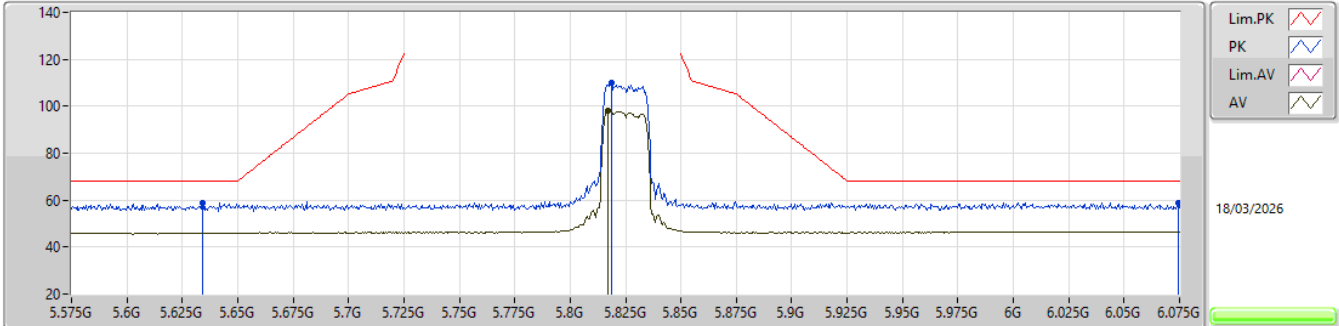


EUT_Y_1TX
Setting 15.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.634G	58.89	68.20	-9.31	47.23	3	Horizontal	190	1.86	-	34.00	7.92	30.26			
PK	5.8185G	109.89	Inf	-Inf	97.93	3	Horizontal	190	1.86	-	33.96	8.20	30.20			
AV	5.817G	98.10	Inf	-Inf	86.13	3	Horizontal	190	1.86	-	33.97	8.20	30.20			
PK	6.0745G	58.94	68.20	-9.26	46.57	3	Horizontal	190	1.86	-	34.45	8.08	30.16			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5825MHz_TX

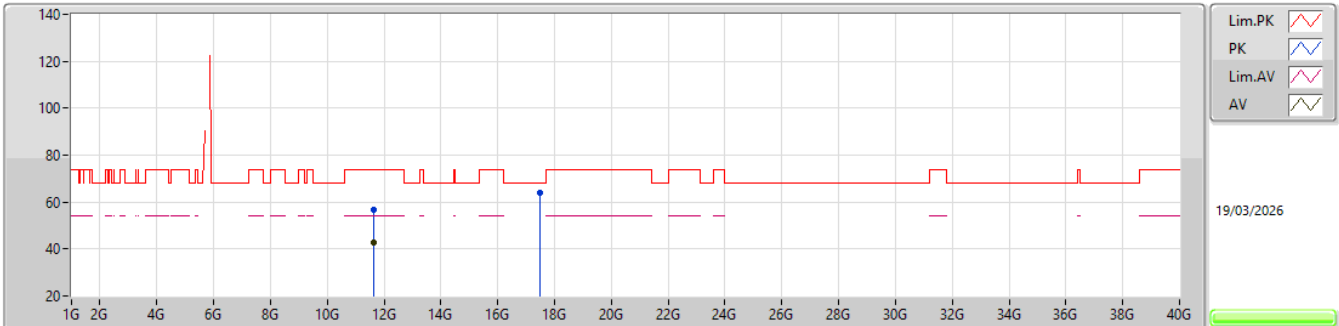EUT_Y_4TX
Setting 15.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.65236G	56.60	74.00	-17.40	70.75	3	Vertical	162	2.97	-	39.30	12.61	66.06			
AV	11.65003G	42.57	54.00	-11.43	56.72	3	Vertical	162	2.97	-	39.30	12.61	66.06			
PK	17.47171G	63.81	68.20	-4.39	69.27	3	Vertical	333	2.94	-	43.67	15.13	64.26			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TX

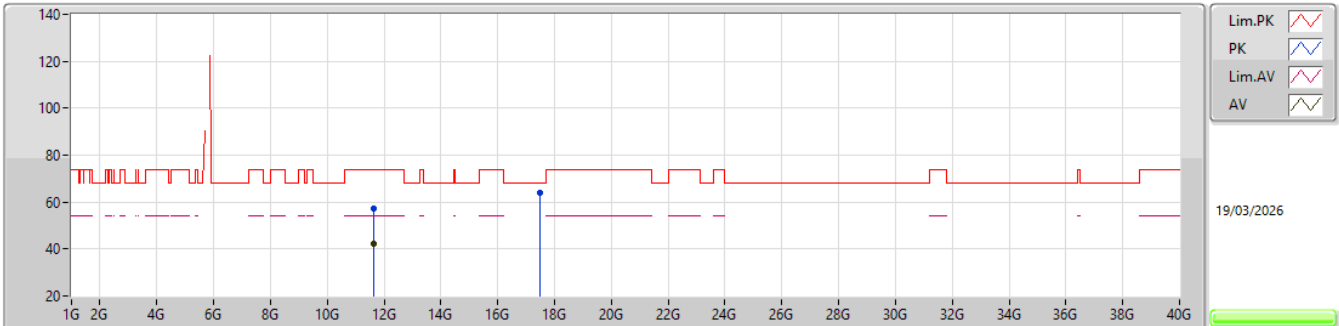EUT_Y_4TX
Setting 15.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64936G	57.12	74.00	-16.88	71.28	3	Horizontal	289	2.71	-	39.30	12.61	66.07			
AV	11.64997G	42.46	54.00	-11.54	56.62	3	Horizontal	289	2.71	-	39.30	12.61	66.07			
PK	17.47412G	64.09	68.20	-4.11	69.53	3	Horizontal	234	1.03	-	43.69	15.13	64.26			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX	Pass	AV	15.7706G	52.98	54.00	-1.02	3	Horizontal	240	1.72	-

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5180MHz_TX

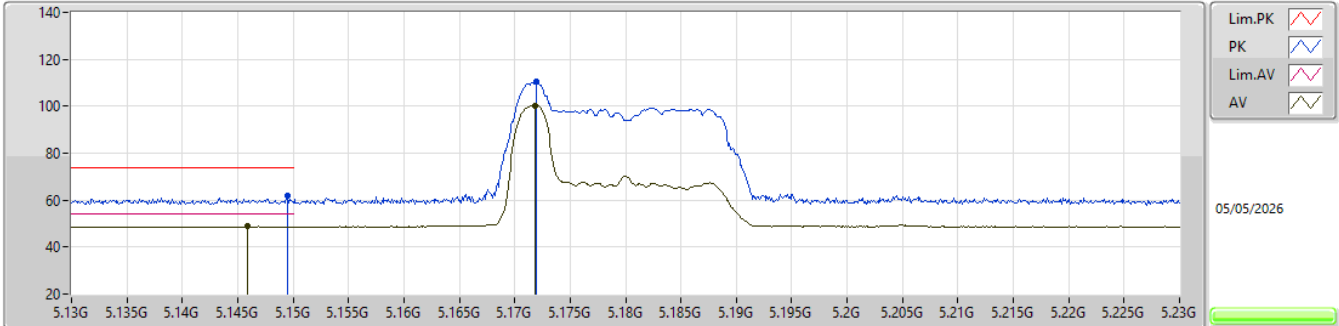


EUT_Y_1TX
Setting 8.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1495G	61.77	74.00	-12.23	55.59	3	Vertical	88	2.72	-	34.10	7.01	34.93			
AV	5.1459G	48.71	54.00	-5.29	42.53	3	Vertical	88	2.72	-	34.10	7.03	34.93			
PK	5.172G	110.59	Inf	-Inf	104.39	3	Vertical	88	2.72	-	34.10	7.03	34.93			
AV	5.1718G	100.43	Inf	-Inf	94.23	3	Vertical	88	2.72	-	34.10	7.03	34.93			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5180MHz_TX

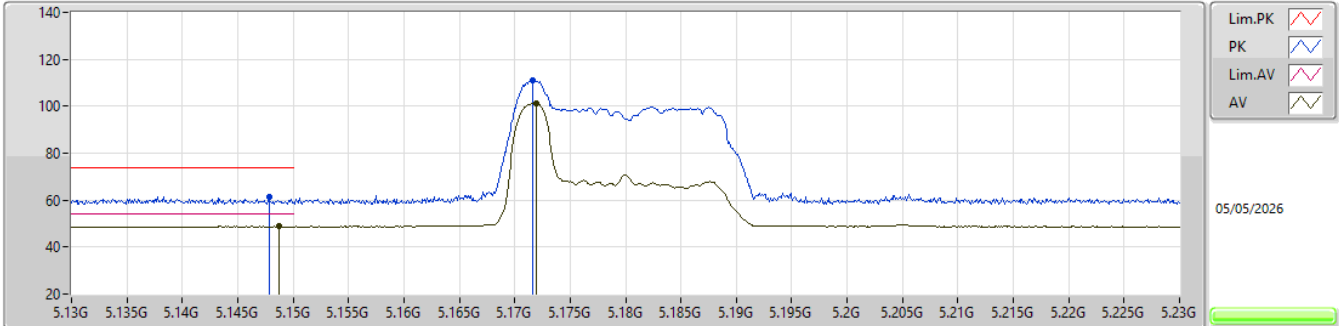


EUT_Y_1TX
Setting 8.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1478G	61.48	74.00	-12.52	55.30	3	Horizontal	190	2.04	-	34.10	7.01	34.93			
AV	5.1487G	48.72	54.00	-5.28	42.54	3	Horizontal	190	2.04	-	34.10	7.01	34.93			
PK	5.1716G	111.06	Inf	-Inf	104.86	3	Horizontal	190	2.04	-	34.10	7.03	34.93			
AV	5.1719G	101.29	Inf	-Inf	95.09	3	Horizontal	190	2.04	-	34.10	7.03	34.93			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5180MHz_TX

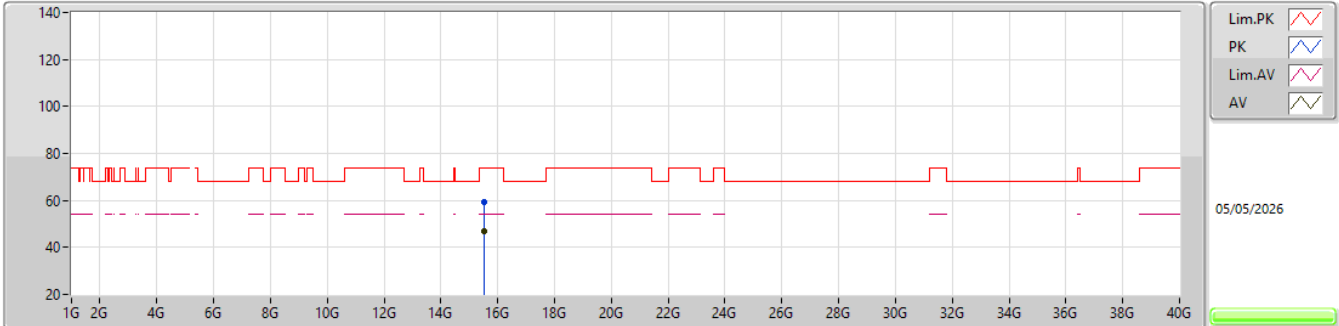


EUT_V_1TX
Setting 8.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.53889G	59.21	74.00	-14.79	43.91	3	Vertical	192	2.01	-	38.24	12.19	35.13			
AV	15.54086G	46.81	54.00	-7.19	31.51	3	Vertical	192	2.01	-	38.24	12.19	35.13			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU0_1TX


5180MHz_TX

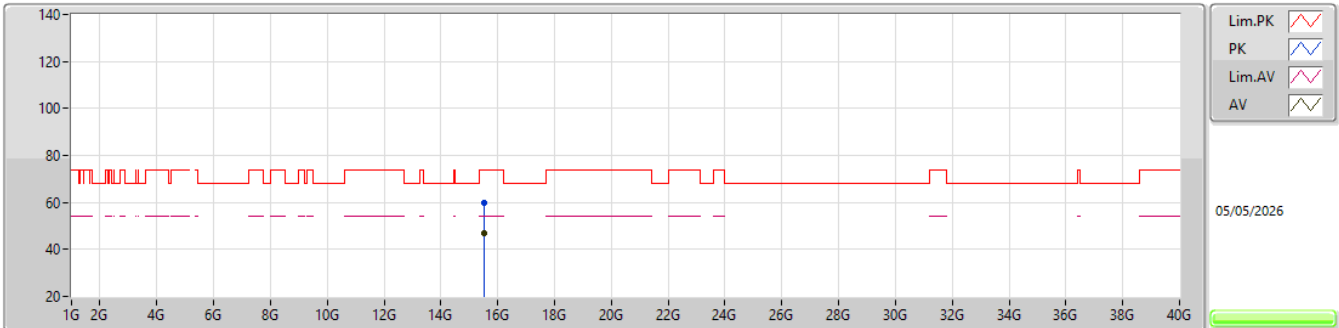EUT_V_1TX
Setting 8.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.54148G	59.78	74.00	-14.22	44.49	3	Horizontal	114	2.09	-	38.23	12.19	35.13			
AV	15.54085G	46.81	54.00	-7.19	31.51	3	Horizontal	114	2.09	-	38.24	12.19	35.13			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU37_1TX


5180MHz_TX

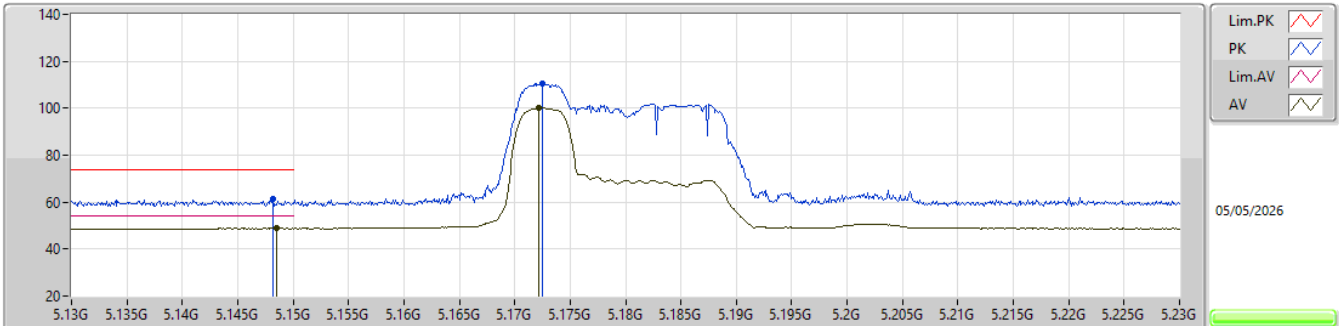EUT_Y_1TX
Setting 11.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1482G	61.33	74.00	-12.67	55.15	3	Vertical	88	2.74	-	34.10	7.01	34.93			
AV	5.1485G	48.72	54.00	-5.28	42.54	3	Vertical	88	2.74	-	34.10	7.03	34.93			
PK	5.1725G	110.52	Inf	-Inf	104.32	3	Vertical	88	2.74	-	34.10	7.03	34.93			
AV	5.1722G	100.02	Inf	-Inf	93.82	3	Vertical	88	2.74	-	34.10	7.03	34.93			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5180MHz_TX

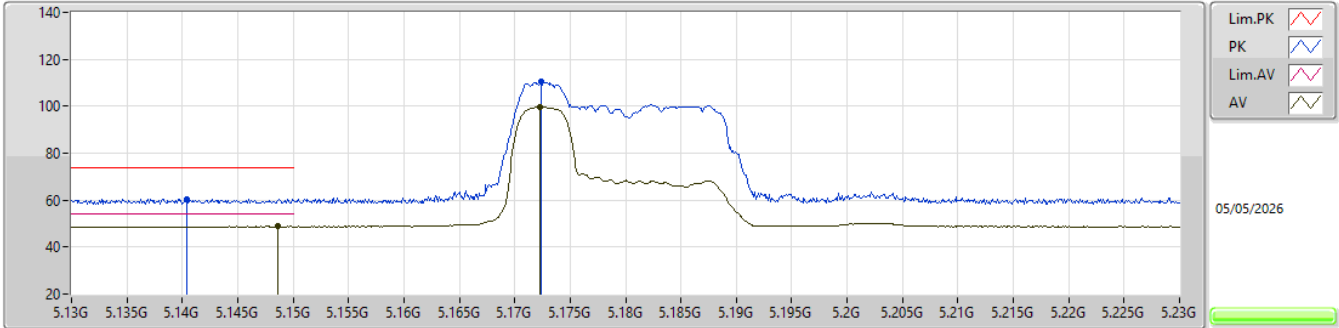


EUT_Y_1TX
Setting 11.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1404G	60.59	74.00	-13.41	54.42	3	Horizontal	192	1.80	-	34.10	7.00	34.93				
AV	5.1486G	48.72	54.00	-5.28	42.54	3	Horizontal	192	1.80	-	34.10	7.01	34.93				
PK	5.1724G	110.41	Inf	-Inf	104.21	3	Horizontal	192	1.80	-	34.10	7.03	34.93				
AV	5.1723G	99.68	Inf	-Inf	93.48	3	Horizontal	192	1.80	-	34.10	7.03	34.93				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5180MHz_TX

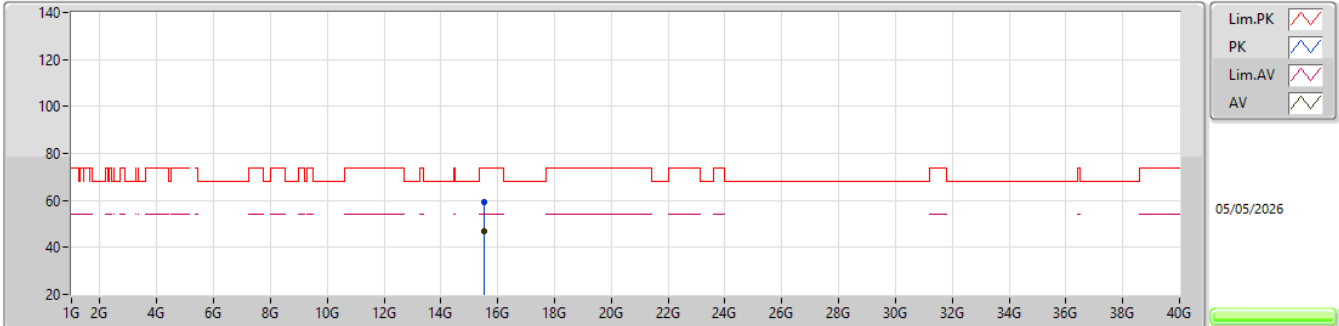


EUT_V_1TX
Setting 11.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.54037G	59.36	74.00	-14.64	44.06	3	Vertical	35	1.73	-	38.24	12.19	35.13			
AV	15.53771G	46.80	54.00	-7.20	31.49	3	Vertical	35	1.73	-	38.25	12.19	35.13			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5180MHz_TX

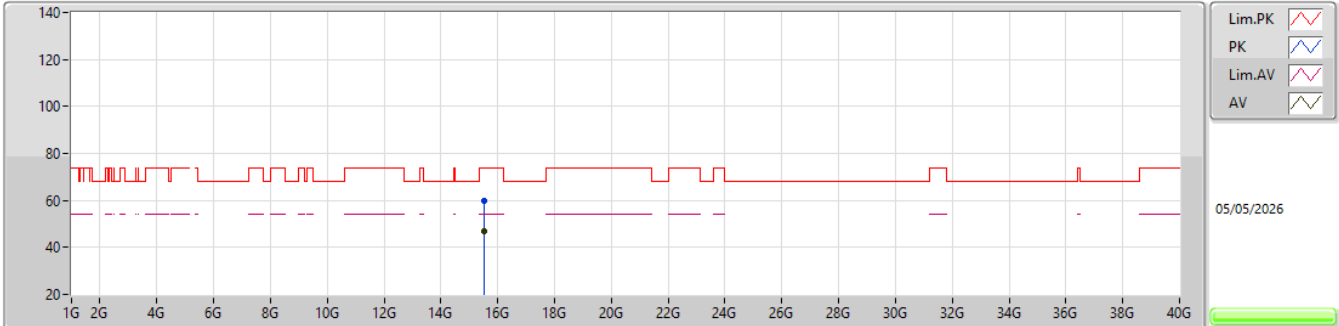


EUT_V_1TX
Setting 11.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.54079G	59.91	74.00	-14.09	44.61	3	Horizontal	100	2.34	-	38.24	12.19	35.13			
AV	15.53755G	46.80	54.00	-7.20	31.49	3	Horizontal	100	2.34	-	38.25	12.19	35.13			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5180MHz_TX

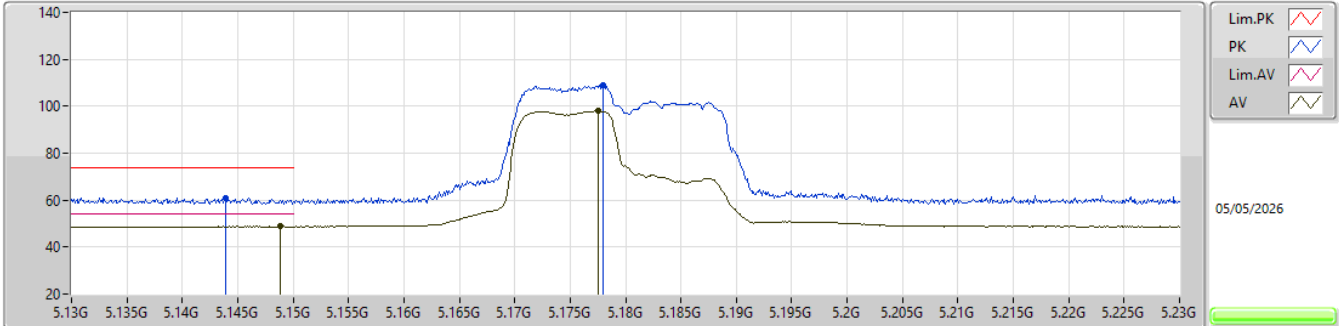


EUT_Y_1TX
Setting 13.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1439G	60.97	74.00	-13.03	54.79	3	Vertical	27	2.16	-	34.10	7.01	34.93			
AV	5.1488G	48.72	54.00	-5.28	42.54	3	Vertical	27	2.16	-	34.10	7.04	34.92			
PK	5.178G	108.81	Inf	-Inf	102.59	3	Vertical	27	2.16	-	34.10	7.04	34.92			
AV	5.1775G	97.91	Inf	-Inf	91.69	3	Vertical	27	2.16	-	34.10	7.04	34.92			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5180MHz_TX

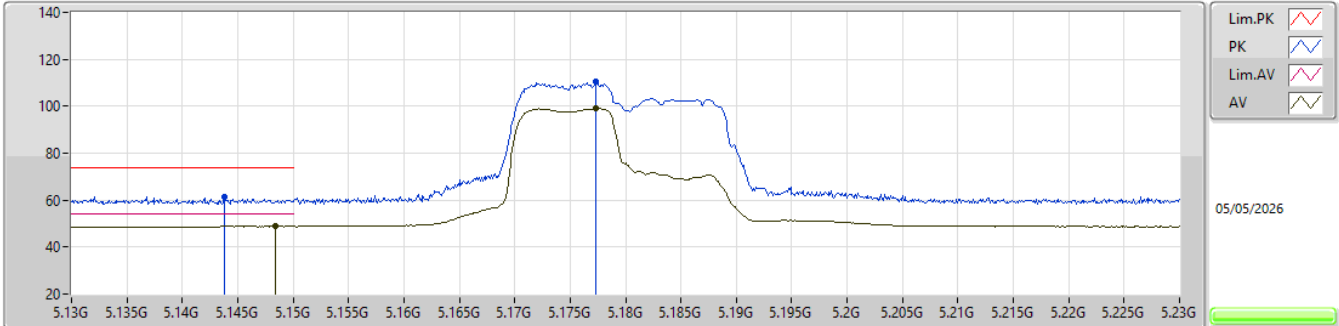


EUT_Y_1TX
Setting 13.5
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1438G	61.37	74.00	-12.63	55.19	3	Horizontal	320.8	1.80	-	34.10	7.01	34.93			
AV	5.1484G	48.72	54.00	-5.28	42.54	3	Horizontal	320.8	1.80	-	34.10	7.01	34.93			
PK	5.1773G	110.61	Inf	-Inf	104.39	3	Horizontal	320.8	1.80	-	34.10	7.04	34.92			
AV	5.1773G	98.99	Inf	-Inf	92.77	3	Horizontal	320.8	1.80	-	34.10	7.04	34.92			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5180MHz_TX

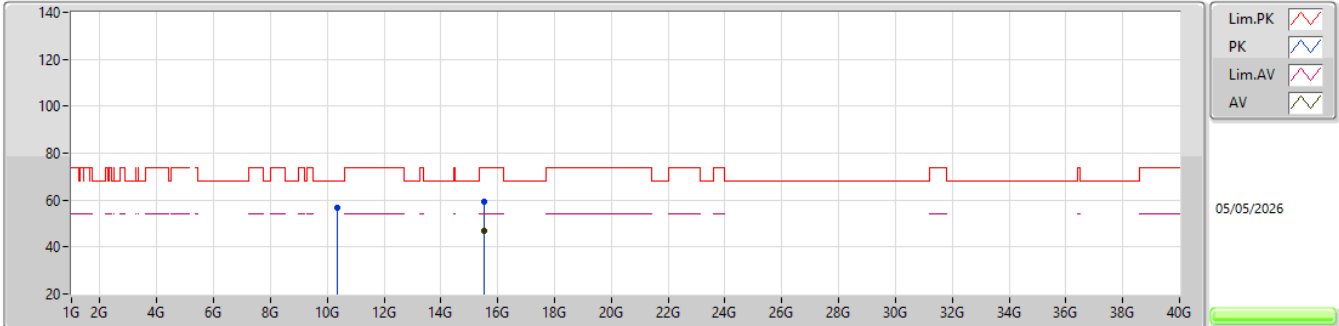


EUT_Y_1TX
Setting 13.5
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36018G	56.65	68.20	-11.55	43.13	3	Vertical	193	1.22	-	38.16	10.38	35.02			
PK	15.53779G	59.48	74.00	-14.52	44.17	3	Vertical	351	2.25	-	38.25	12.19	35.13			
AV	15.54095G	46.81	54.00	-7.19	31.51	3	Vertical	351	2.25	-	38.24	12.19	35.13			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5180MHz_TX

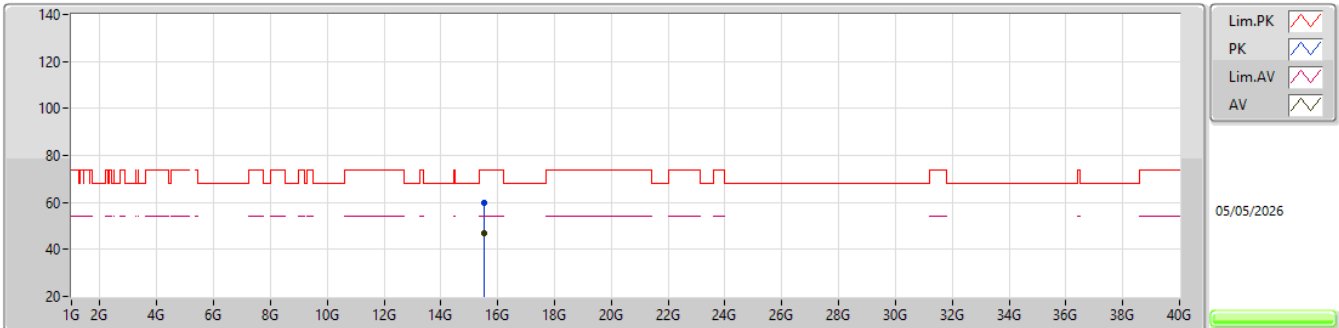


EUT_V_1TX
Setting 13.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.53888G	59.85	74.00	-14.15	44.55	3	Horizontal	169	2.52	-	38.24	12.19	35.13			
AV	15.5377G	46.80	54.00	-7.20	31.49	3	Horizontal	169	2.52	-	38.25	12.19	35.13			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5180MHz_TX

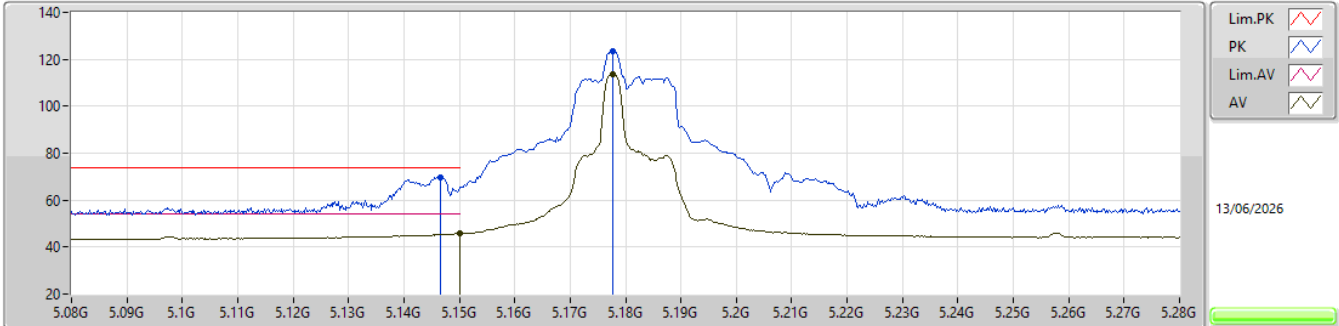


EUT_Y_1TX
Setting 21
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1466G	69.84	74.00	-4.16	63.66	3	Vertical	222	2.59	-	34.10	7.01	34.93			
AV	5.15G	46.00	54.00	-8.00	39.82	3	Vertical	222	2.59	-	34.10	7.01	34.93			
PK	5.1776G	123.42	Inf	-Inf	117.20	3	Vertical	222	2.59	-	34.10	7.04	34.92			
AV	5.1776G	113.85	Inf	-Inf	107.63	3	Vertical	222	2.59	-	34.10	7.04	34.92			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5180MHz_TX

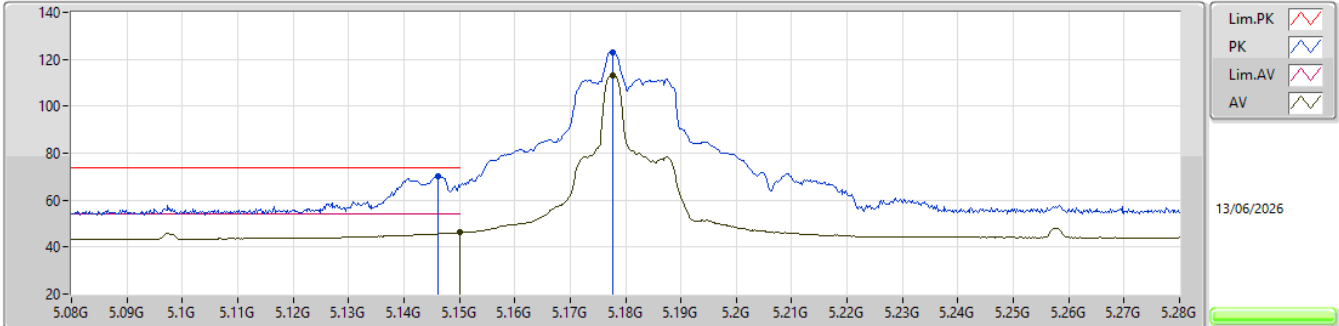EUT_Y_1TX
Setting 21
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1462G	70.42	74.00	-3.58	64.24	3	Horizontal	50	2.03	-	34.10	7.01	34.93			
AV	5.15G	46.30	54.00	-7.70	40.12	3	Horizontal	50	2.03	-	34.10	7.01	34.93			
PK	5.1778G	122.84	Inf	-Inf	116.62	3	Horizontal	50	2.03	-	34.10	7.04	34.92			
AV	5.1776G	113.19	Inf	-Inf	106.97	3	Horizontal	50	2.03	-	34.10	7.04	34.92			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5180MHz_TX

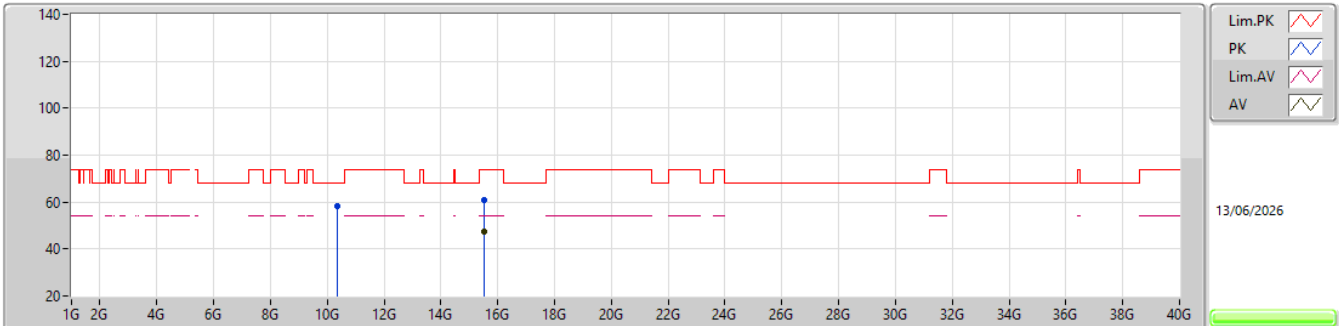EUT_Y_1TX
Setting 21
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35493G	58.28	68.20	-9.92	76.60	3	Vertical	133	1.76	-	38.18	10.38	66.88			
PK	15.53322G	60.94	74.00	-13.06	74.41	3	Vertical	142	1.66	-	38.27	12.19	63.93			
AV	15.53304G	47.17	54.00	-6.83	60.64	3	Vertical	142	1.66	-	38.27	12.19	63.93			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5180MHz_TX

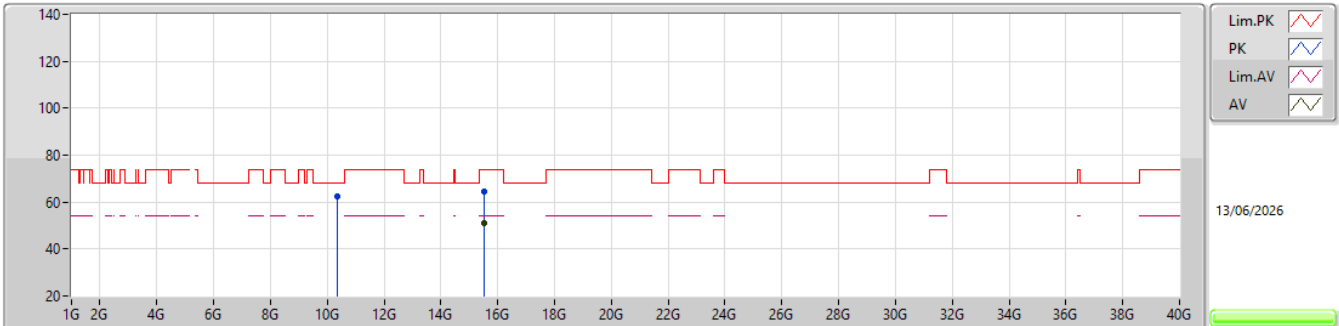EUT_Y_1TX
Setting 21
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35655G	62.52	68.20	-5.68	80.85	3	Horizontal	224	2.54	-	38.17	10.38	66.88			
PK	15.53265G	64.26	74.00	-9.74	77.73	3	Horizontal	240	1.71	-	38.27	12.19	63.93			
AV	15.53307G	50.95	54.00	-3.05	64.42	3	Horizontal	240	1.71	-	38.27	12.19	63.93			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5180MHz_TX

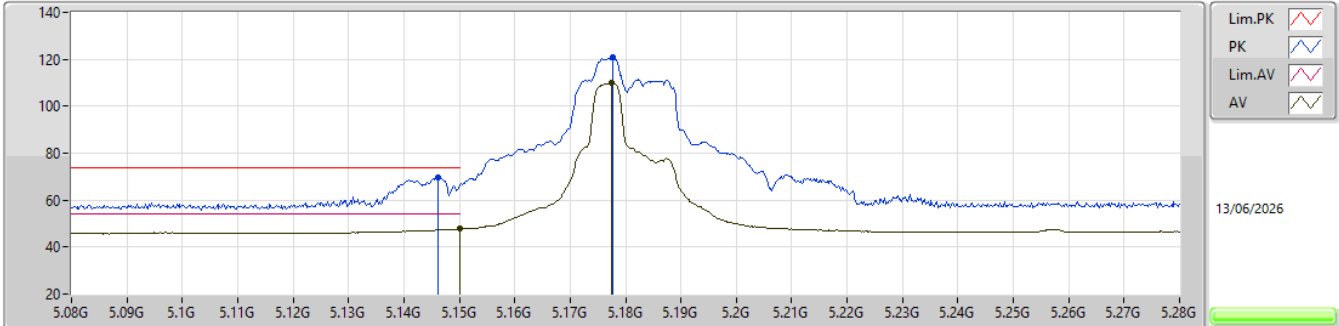


EUT_Y_1TX
Setting 21
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1462G	69.41	74.00	-4.59	63.23	3	Vertical	46	1.94	-	34.10	7.01	34.93			
AV	5.15G	47.89	54.00	-6.11	41.71	3	Vertical	46	1.94	-	34.10	7.01	34.93			
PK	5.1778G	121.07	Inf	-Inf	114.85	3	Vertical	46	1.94	-	34.10	7.04	34.92			
AV	5.1774G	109.90	Inf	-Inf	103.68	3	Vertical	46	1.94	-	34.10	7.04	34.92			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5180MHz_TX

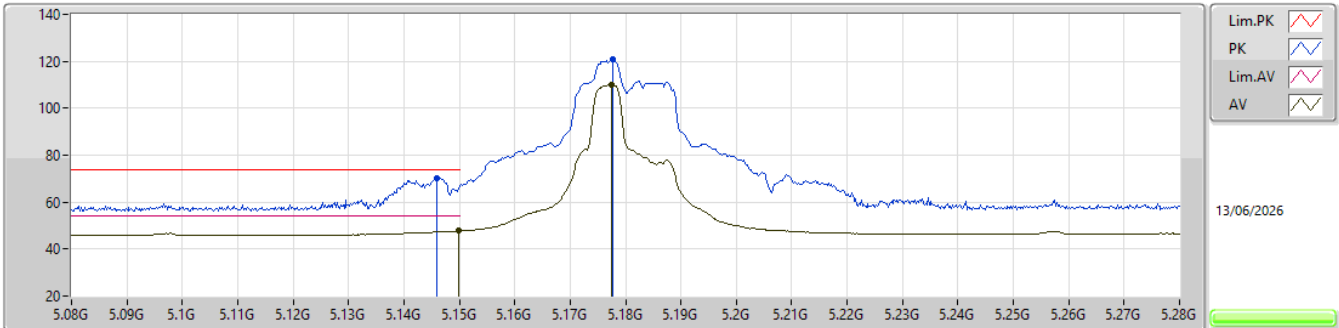EUT_Y_1TX
Setting 21
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.146G	70.17	74.00	-3.83	63.99	3	Horizontal	47	1.98	-	34.10	7.01	34.93			
AV	5.1498G	47.92	54.00	-6.08	41.74	3	Horizontal	47	1.98	-	34.10	7.01	34.93			
PK	5.1778G	121.08	Inf	-Inf	114.86	3	Horizontal	47	1.98	-	34.10	7.04	34.92			
AV	5.1774G	110.02	Inf	-Inf	103.80	3	Horizontal	47	1.98	-	34.10	7.04	34.92			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5180MHz_TX

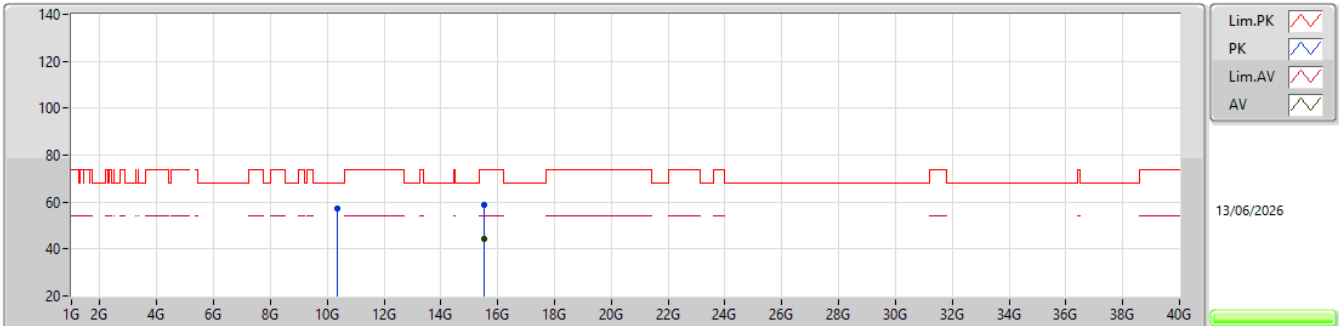EUT_Y_1TX
Setting 21
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35614G	57.08	68.20	-11.12	75.40	3	Vertical	132	1.81	-	38.18	10.38	66.88			
PK	15.52964G	59.01	74.00	-14.99	72.47	3	Vertical	143	1.70	-	38.28	12.19	63.93			
AV	15.53047G	44.27	54.00	-9.73	57.73	3	Vertical	143	1.70	-	38.28	12.19	63.93			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5180MHz_TX

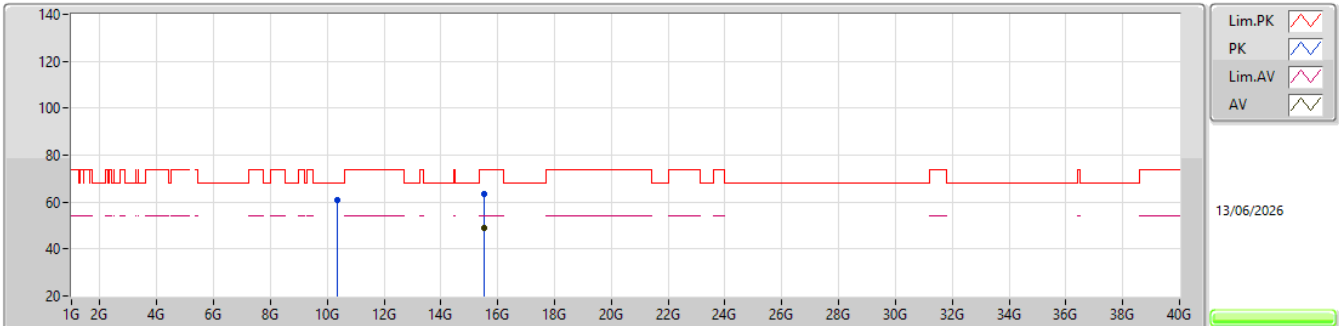EUT_Y_1TX
Setting 21
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35497G	61.11	68.20	-7.09	79.43	3	Horizontal	225	2.55	-	38.18	10.38	66.88			
PK	15.52975G	63.31	74.00	-10.69	76.77	3	Horizontal	238	1.71	-	38.28	12.19	63.93			
AV	15.5303G	48.72	54.00	-5.28	62.18	3	Horizontal	238	1.71	-	38.28	12.19	63.93			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5180MHz_TX

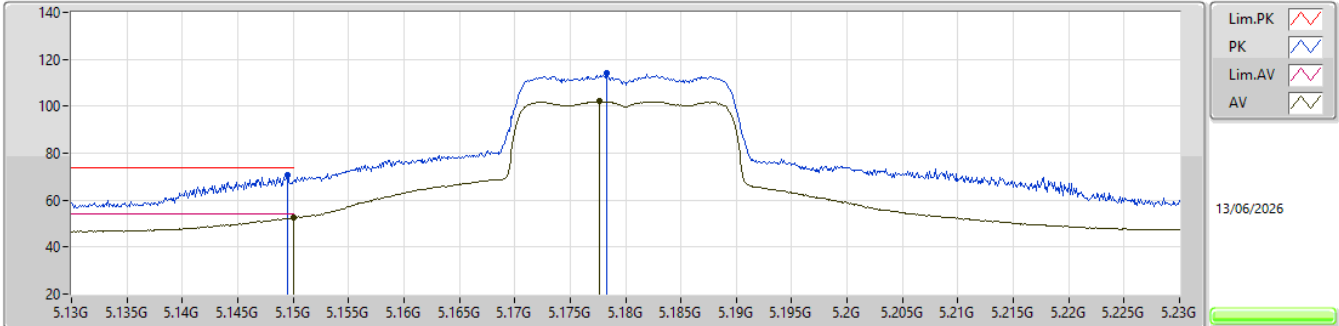


EUT_Y_1TX
Setting 18.5
03-Y-G-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1495G	70.58	74.00	-3.42	64.40	3	Vertical	223	2.71	-	34.10	7.01	34.93			
AV	5.15G	52.77	54.00	-1.23	46.59	3	Vertical	223	2.71	-	34.10	7.01	34.93			
PK	5.1783G	113.90	Inf	-Inf	107.68	3	Vertical	223	2.71	-	34.10	7.04	34.92			
AV	5.1776G	102.07	Inf	-Inf	95.85	3	Vertical	223	2.71	-	34.10	7.04	34.92			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5180MHz_TX

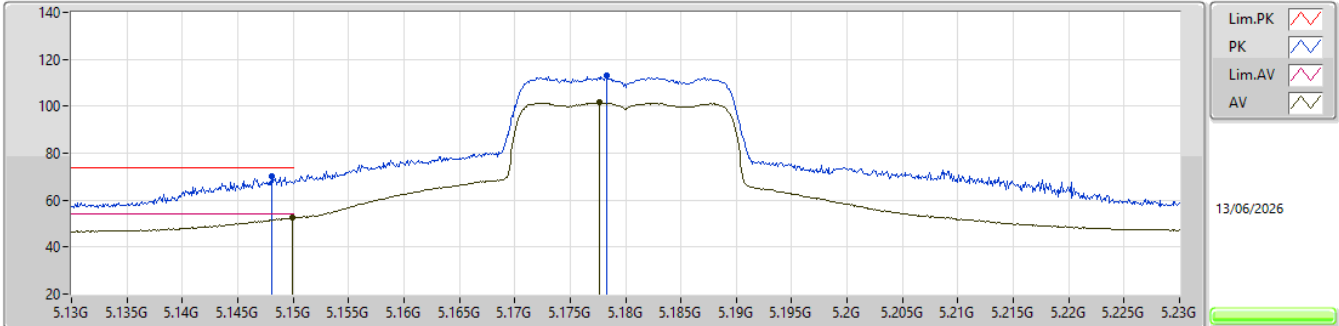


EUT_Y_1TX
Setting 18.5
03-Y-G-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1481G	70.09	74.00	-3.91	63.91	3	Horizontal	49	1.95	-	34.10	7.01	34.93			
AV	5.1499G	52.59	54.00	-1.41	46.41	3	Horizontal	49	1.95	-	34.10	7.01	34.93			
PK	5.1783G	113.32	Inf	-Inf	107.10	3	Horizontal	49	1.95	-	34.10	7.04	34.92			
AV	5.1776G	101.56	Inf	-Inf	95.34	3	Horizontal	49	1.95	-	34.10	7.04	34.92			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5180MHz_TX

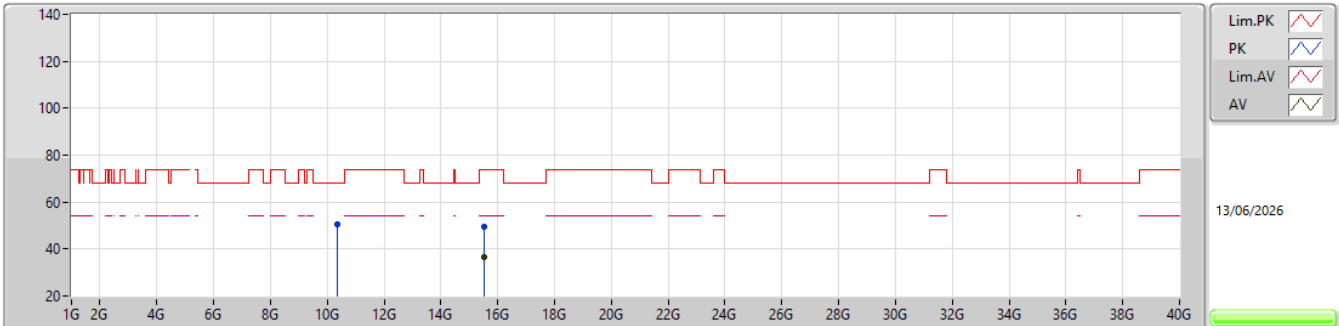EUT_Y_1TX
Setting 18.5
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36015G	50.60	68.20	-17.60	68.93	3	Vertical	132	1.71	-	38.16	10.38	66.87			
PK	15.5411G	49.57	74.00	-24.43	63.07	3	Vertical	138.7	1.68	-	38.24	12.19	63.93			
AV	15.54325G	36.73	54.00	-17.27	50.24	3	Vertical	138.7	1.68	-	38.23	12.19	63.93			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5180MHz_TX

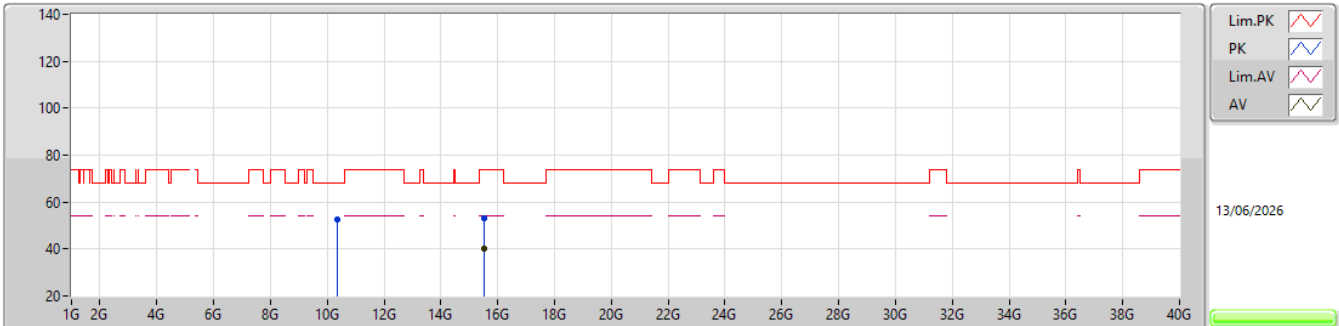EUT_Y_1TX
Setting 18.5
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35965G	52.59	68.20	-15.61	70.92	3	Horizontal	235	1.80	-	38.16	10.38	66.87			
PK	15.53505G	53.05	74.00	-20.95	66.53	3	Horizontal	238	1.71	-	38.26	12.19	63.93			
AV	15.54095G	40.29	54.00	-13.71	53.79	3	Horizontal	238	1.71	-	38.24	12.19	63.93			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX


5260MHz_TX

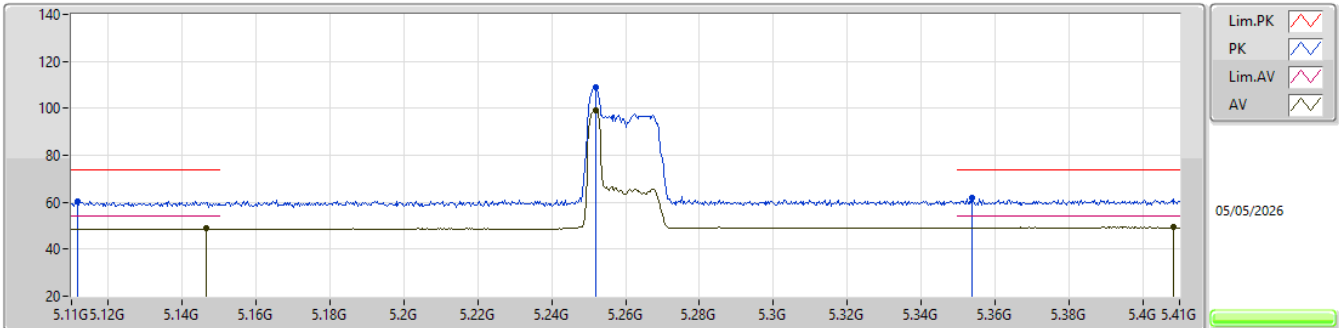EUT_Y_1TX
Setting 11.5
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1118G	60.50	74.00	-13.50	54.36	3	Vertical	30	2.70	-	34.10	6.98	34.94			
AV	5.1466G	48.71	54.00	-5.29	42.53	3	Vertical	30	2.70	-	34.10	7.01	34.93			
PK	5.2519G	108.88	Inf	-Inf	102.38	3	Vertical	30	2.70	-	34.31	7.10	34.91			
AV	5.2519G	99.09	Inf	-Inf	92.59	3	Vertical	30	2.70	-	34.31	7.10	34.91			
PK	5.3539G	61.86	74.00	-12.14	54.97	3	Vertical	30	2.70	-	34.61	7.17	34.89			
AV	5.4082G	49.39	54.00	-4.61	42.36	3	Vertical	30	2.70	-	34.70	7.21	34.88			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5260MHz_TX

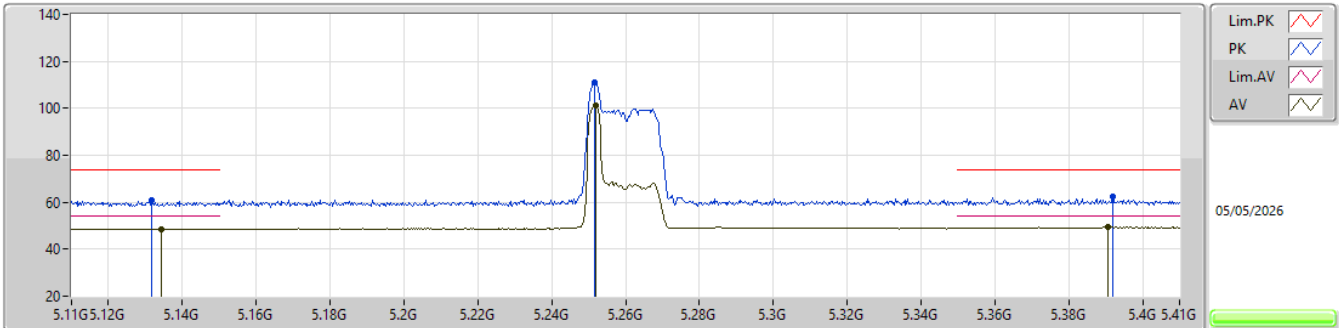


EUT_Y_1TX
Setting 11.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1316G	60.89	74.00	-13.11	54.72	3	Horizontal	190	1.80	-	34.10	7.00	34.93			
AV	5.1343G	48.68	54.00	-5.32	42.51	3	Horizontal	190	1.80	-	34.10	7.00	34.93			
PK	5.2516G	111.19	Inf	-Inf	104.69	3	Horizontal	190	1.80	-	34.31	7.10	34.91			
AV	5.2519G	101.06	Inf	-Inf	94.56	3	Horizontal	190	1.80	-	34.31	7.10	34.91			
PK	5.392G	62.41	74.00	-11.59	55.42	3	Horizontal	190	1.80	-	34.68	7.19	34.88			
AV	5.3905G	49.45	54.00	-4.55	42.46	3	Horizontal	190	1.80	-	34.68	7.19	34.88			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5260MHz_TX

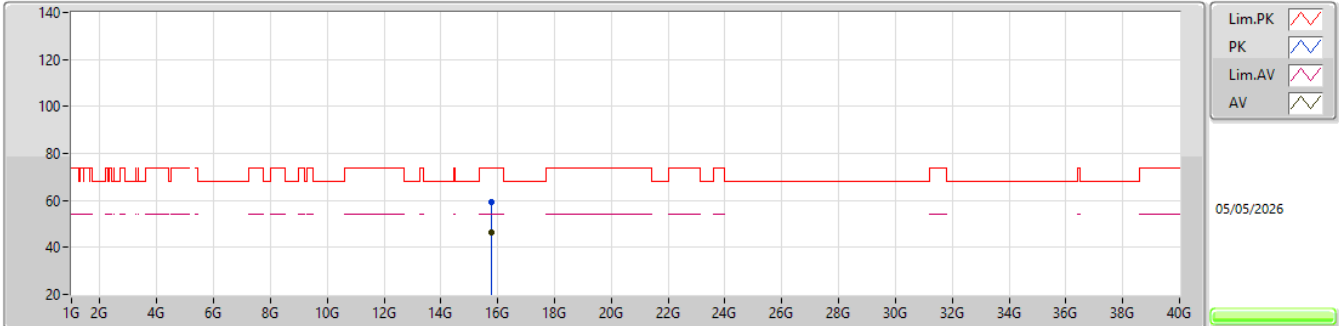


EUT_V_1TX
Setting 11.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.78061G	59.19	74.00	-14.81	44.25	3	Vertical	169	1.54	-	37.78	12.30	35.14			
AV	15.77813G	46.44	54.00	-7.56	31.49	3	Vertical	169	1.54	-	37.79	12.30	35.14			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5260MHz_TX

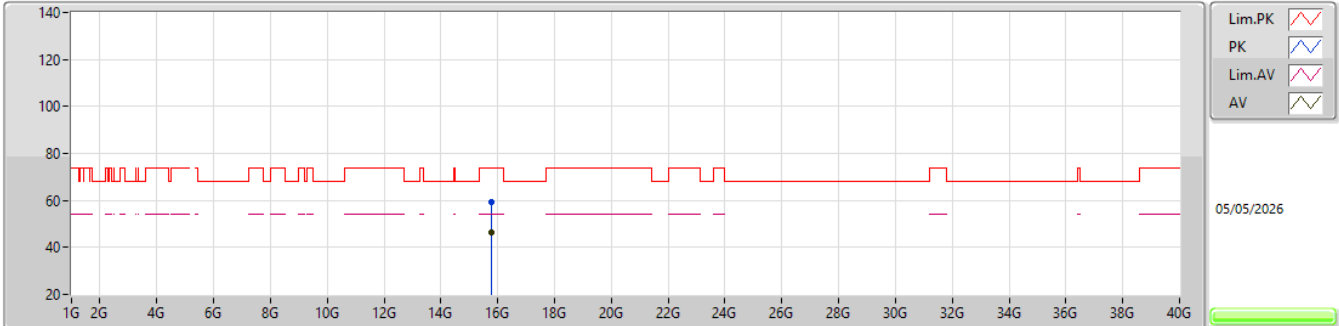


EUT_V_1TX
Setting 11.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.78248G	59.12	74.00	-14.88	44.19	3	Horizontal	69	2.07	-	37.77	12.30	35.14			
AV	15.77919G	46.49	54.00	-7.51	31.55	3	Horizontal	69	2.07	-	37.78	12.30	35.14			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5260MHz_TX

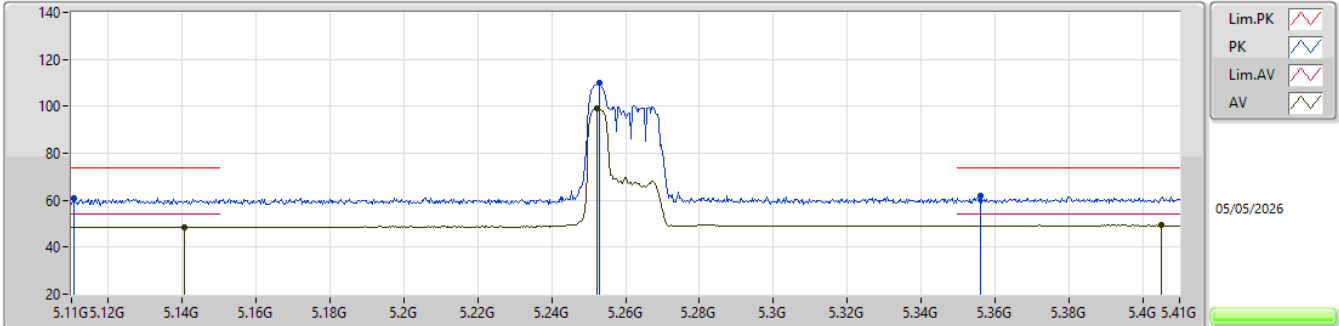


EUT_Y_1TX
Setting 11.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1106G	60.87	74.00	-13.13	54.73	3	Vertical	33	2.70	-	34.10	6.98	34.94			
AV	5.1406G	48.69	54.00	-5.31	42.52	3	Vertical	33	2.70	-	34.10	7.00	34.93			
PK	5.2528G	109.77	Inf	-Inf	103.26	3	Vertical	33	2.70	-	34.32	7.10	34.91			
AV	5.2522G	99.22	Inf	-Inf	92.72	3	Vertical	33	2.70	-	34.31	7.10	34.91			
PK	5.356G	61.92	74.00	-12.08	55.03	3	Vertical	33	2.70	-	34.61	7.17	34.89			
AV	5.4052G	49.36	54.00	-4.64	42.34	3	Vertical	33	2.70	-	34.70	7.20	34.88			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5260MHz_TX

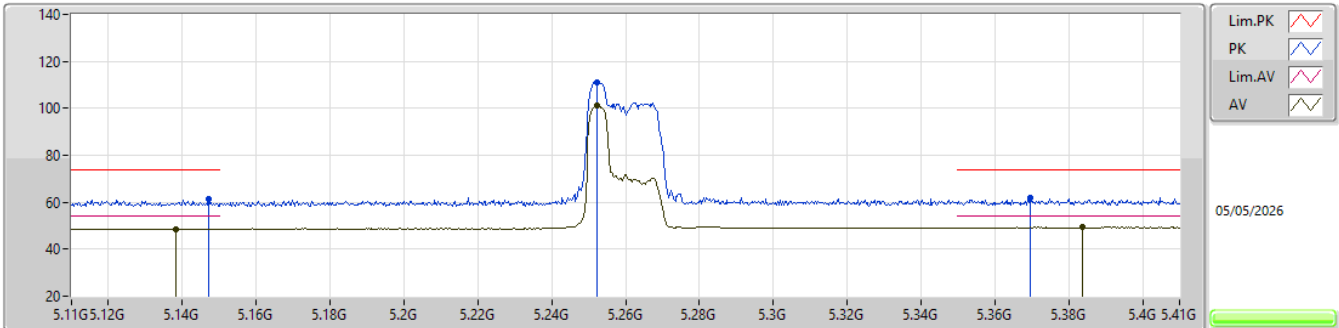


EUT_Y_1TX
Setting 11.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1472G	61.53	74.00	-12.47	55.35	3	Horizontal	190	1.80	-	34.10	7.01	34.93			
AV	5.1382G	48.69	54.00	-5.31	42.52	3	Horizontal	190	1.80	-	34.10	7.00	34.93			
PK	5.2522G	111.08	Inf	-Inf	104.58	3	Horizontal	190	1.80	-	34.31	7.10	34.91			
AV	5.2522G	100.95	Inf	-Inf	94.45	3	Horizontal	190	1.80	-	34.31	7.10	34.91			
PK	5.3695G	61.79	74.00	-12.21	54.86	3	Horizontal	190	1.80	-	34.64	7.18	34.89			
AV	5.3836G	49.40	54.00	-4.60	42.42	3	Horizontal	190	1.80	-	34.67	7.19	34.88			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5260MHz_TX

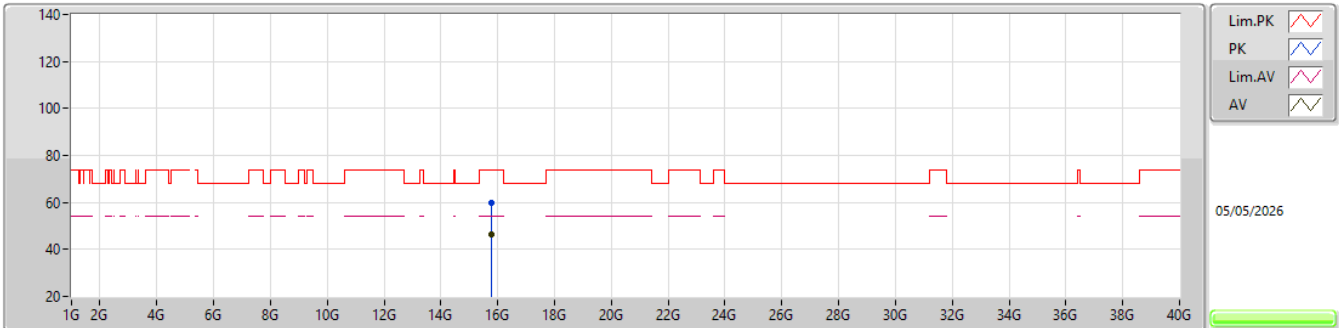


EUT_V_1TX
Setting 11.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.78066G	59.58	74.00	-14.42	44.64	3	Vertical	212	2.36	-	37.78	12.30	35.14			
AV	15.77765G	46.44	54.00	-7.56	31.49	3	Vertical	212	2.36	-	37.79	12.30	35.14			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5260MHz_TX

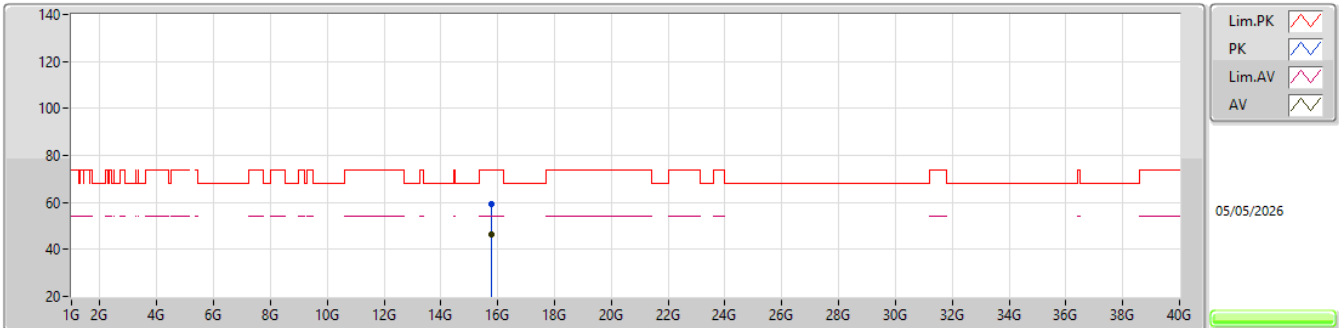


EUT_V_1TX
Setting 11.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.7796G	59.33	74.00	-14.67	44.39	3	Horizontal	204	2.95	-	37.78	12.30	35.14			
AV	15.77779G	46.44	54.00	-7.56	31.49	3	Horizontal	204	2.95	-	37.79	12.30	35.14			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5260MHz_TX

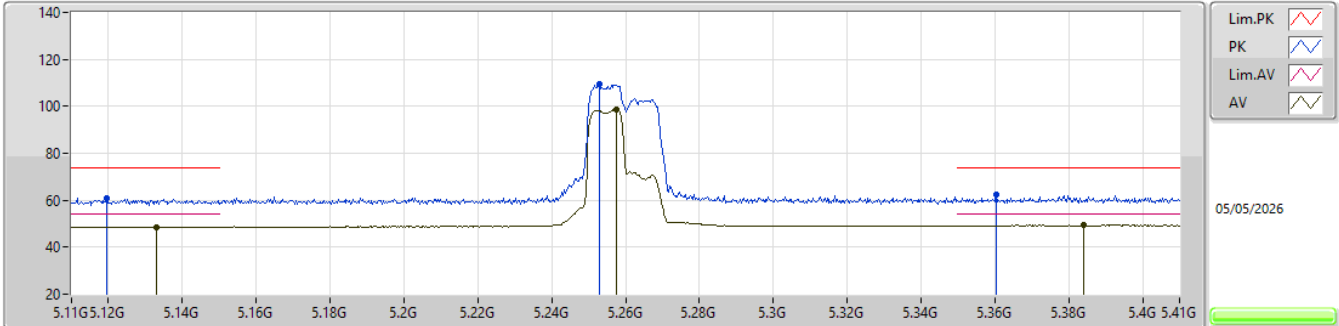


EUT_Y_1TX
Setting 14
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1196G	60.83	74.00	-13.17	54.69	3	Vertical	34	2.58	-	34.10	6.98	34.94			
AV	5.1331G	48.68	54.00	-5.32	42.51	3	Vertical	34	2.58	-	34.10	7.00	34.93			
PK	5.2528G	109.45	Inf	-Inf	102.94	3	Vertical	34	2.58	-	34.32	7.10	34.91			
AV	5.2576G	98.75	Inf	-Inf	92.21	3	Vertical	34	2.58	-	34.35	7.10	34.91			
PK	5.3605G	62.20	74.00	-11.80	55.30	3	Vertical	34	2.58	-	34.62	7.17	34.89			
AV	5.3839G	49.40	54.00	-4.60	42.42	3	Vertical	34	2.58	-	34.67	7.19	34.88			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5260MHz_TX

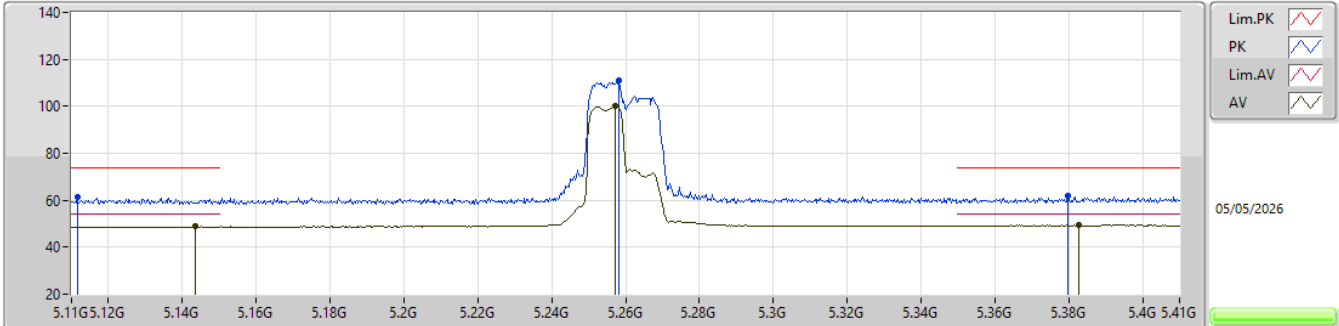


EUT_Y_1TX
Setting 14
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1115G	61.17	74.00	-12.83	55.03	3	Horizontal	191	1.80	-	34.10	6.98	34.94			
AV	5.1436G	48.71	54.00	-5.29	42.53	3	Horizontal	191	1.80	-	34.10	7.01	34.93			
PK	5.2582G	110.86	Inf	-Inf	104.32	3	Horizontal	191	1.80	-	34.35	7.10	34.91			
AV	5.2573G	99.93	Inf	-Inf	93.40	3	Horizontal	191	1.80	-	34.34	7.10	34.91			
PK	5.3797G	61.74	74.00	-12.26	54.77	3	Horizontal	191	1.80	-	34.66	7.19	34.88			
AV	5.3827G	49.40	54.00	-4.60	42.42	3	Horizontal	191	1.80	-	34.67	7.19	34.88			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5260MHz_TX

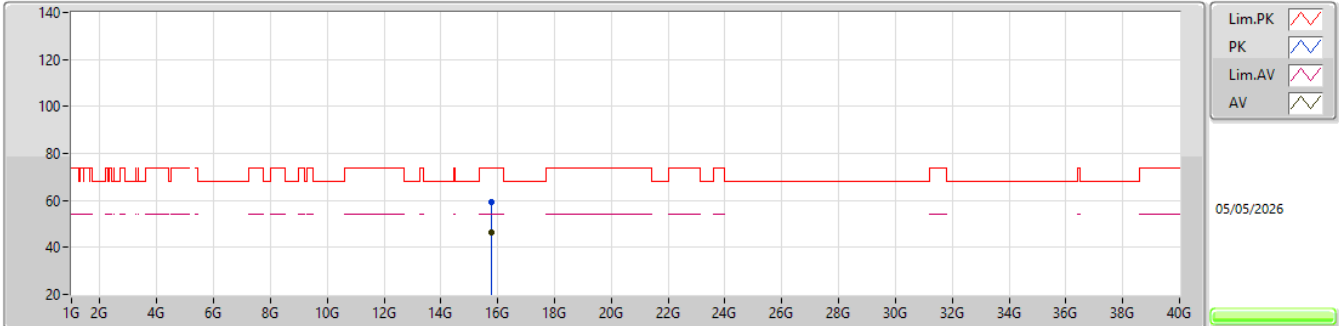


EUT_V_1TX
Setting 14
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.78145G	59.38	74.00	-14.62	44.45	3	Vertical	13	2.24	-	37.77	12.30	35.14			
AV	15.77914G	46.43	54.00	-7.57	31.49	3	Vertical	13	2.24	-	37.78	12.30	35.14			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5260MHz_TX

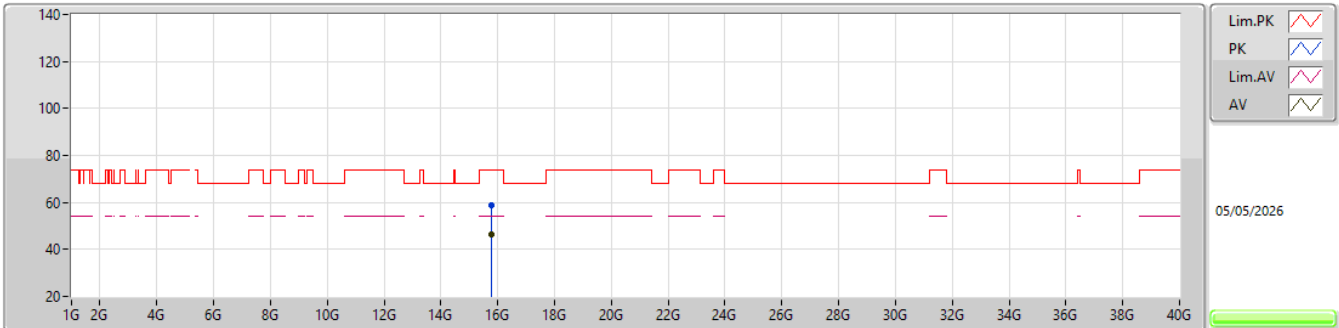


EUT_V_1TX
Setting 14
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.78126G	58.82	74.00	-15.18	43.89	3	Horizontal	255	1.42	-	37.77	12.30	35.14			
AV	15.77894G	46.43	54.00	-7.57	31.49	3	Horizontal	255	1.42	-	37.78	12.30	35.14			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5260MHz_TX

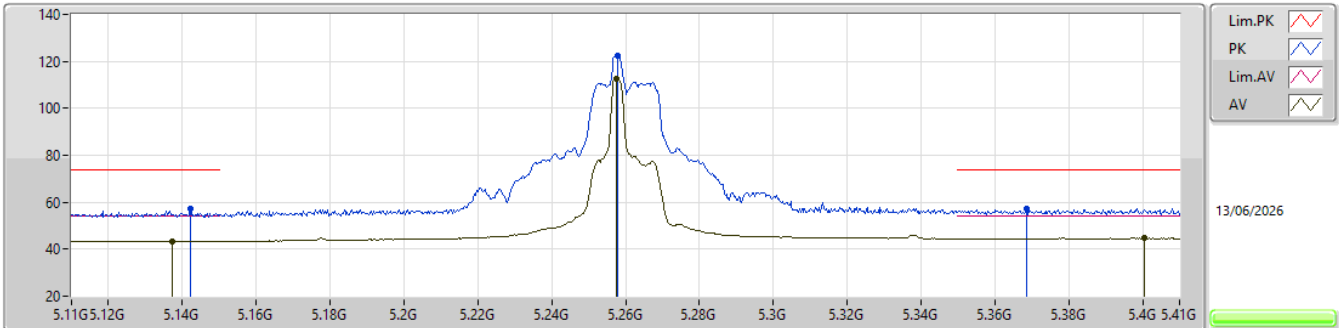EUT_Y_1TX
Setting 20
03-Y-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1421G	57.06	74.00	-16.94	50.89	3	Vertical	222	2.70	-	34.10	7.00	34.93			
AV	5.1373G	43.47	54.00	-10.53	37.30	3	Vertical	222	2.70	-	34.10	7.00	34.93			
PK	5.2579G	122.66	Inf	-Inf	116.12	3	Vertical	222	2.70	-	34.35	7.10	34.91			
AV	5.2576G	112.65	Inf	-Inf	106.11	3	Vertical	222	2.70	-	34.35	7.10	34.91			
PK	5.3686G	57.36	74.00	-16.64	50.43	3	Vertical	222	2.70	-	34.64	7.18	34.89			
AV	5.4004G	44.77	54.00	-9.23	37.75	3	Vertical	222	2.70	-	34.70	7.20	34.88			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5260MHz_TX

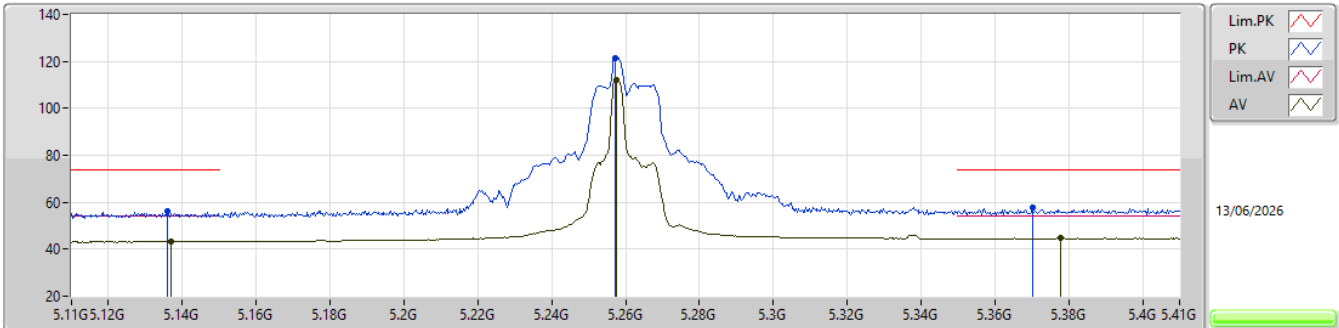EUT_Y_1TX
Setting 20
03-Y-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1361G	56.14	74.00	-17.86	49.97	3	Horizontal	133	1.80	-	34.10	7.00	34.93			
AV	5.137G	43.30	54.00	-10.70	37.13	3	Horizontal	133	1.80	-	34.10	7.00	34.93			
PK	5.2573G	121.58	Inf	-Inf	115.05	3	Horizontal	133	1.80	-	34.34	7.10	34.91			
AV	5.2576G	111.93	Inf	-Inf	105.39	3	Horizontal	133	1.80	-	34.35	7.10	34.91			
PK	5.3701G	57.83	74.00	-16.17	50.90	3	Horizontal	133	1.80	-	34.64	7.18	34.89			
AV	5.3779G	44.87	54.00	-9.13	37.91	3	Horizontal	133	1.80	-	34.66	7.18	34.88			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5260MHz_TX

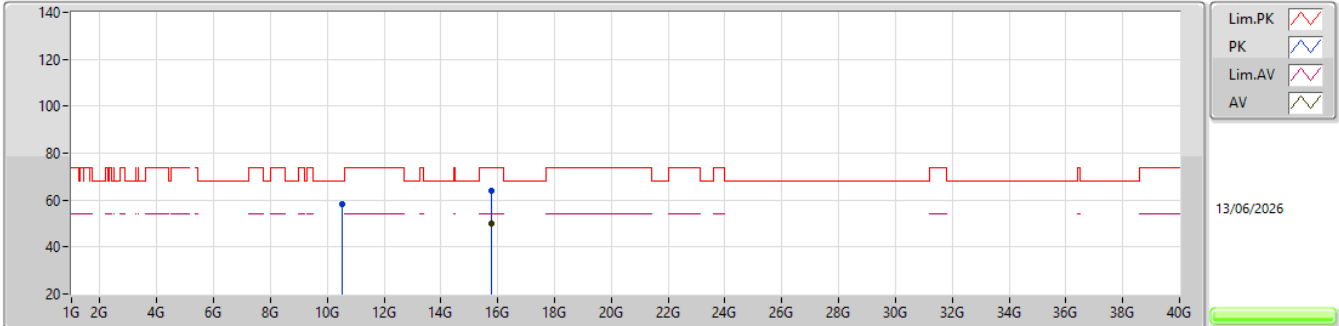


EUT_Y_1TX
Setting 20
03-Y-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.5157G	58.06	68.20	-10.14	76.07	3	Vertical	166	2.23	-	38.20	10.43	66.64			
PK	15.7719G	63.79	74.00	-10.21	77.63	3	Vertical	203	2.65	-	37.81	12.30	63.95			
AV	15.773G	50.12	54.00	-3.88	63.96	3	Vertical	203	2.65	-	37.81	12.30	63.95			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5260MHz_TX

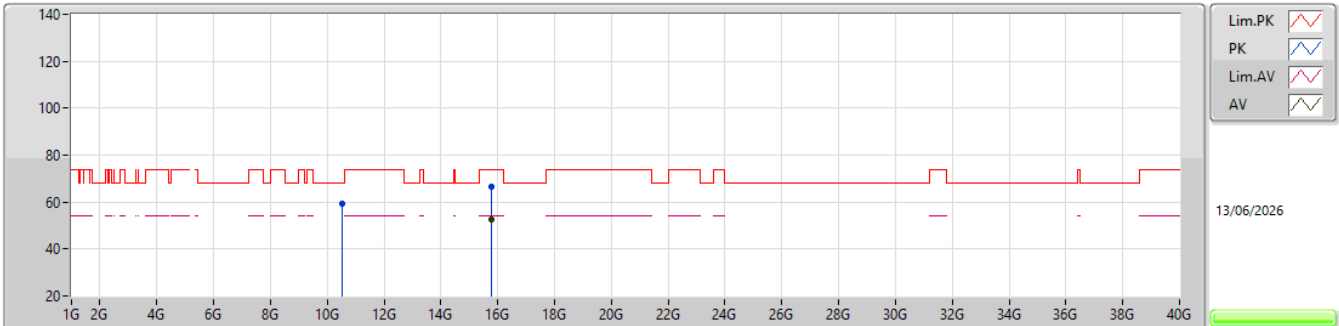


EUT_Y_1TX
Setting 20
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51635G	59.32	68.20	-8.88	77.33	3	Horizontal	135	2.80	-	38.20	10.43	66.64			
PK	15.77375G	66.46	74.00	-7.54	80.31	3	Horizontal	243	1.66	-	37.80	12.30	63.95			
AV	15.7731G	52.54	54.00	-1.46	66.38	3	Horizontal	243	1.66	-	37.81	12.30	63.95			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5260MHz_TX

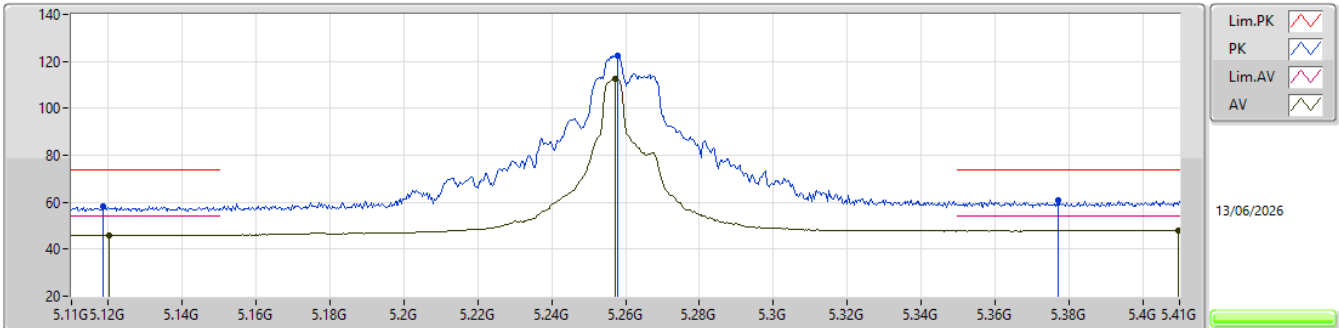


EUT_Y_1TX
Setting 24
03-Y-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1184G	58.35	74.00	-15.65	52.21	3	Vertical	221	2.65	-	34.10	6.98	34.94			
AV	5.1202G	46.07	54.00	-7.93	39.93	3	Vertical	221	2.65	-	34.10	6.98	34.94			
PK	5.2579G	122.40	Inf	-Inf	115.86	3	Vertical	221	2.65	-	34.35	7.10	34.91			
AV	5.2573G	112.45	Inf	-Inf	105.92	3	Vertical	221	2.65	-	34.34	7.10	34.91			
PK	5.3773G	60.66	74.00	-13.34	53.71	3	Vertical	221	2.65	-	34.65	7.18	34.88			
AV	5.4097G	48.08	54.00	-5.92	41.05	3	Vertical	221	2.65	-	34.70	7.21	34.88			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5260MHz_TX

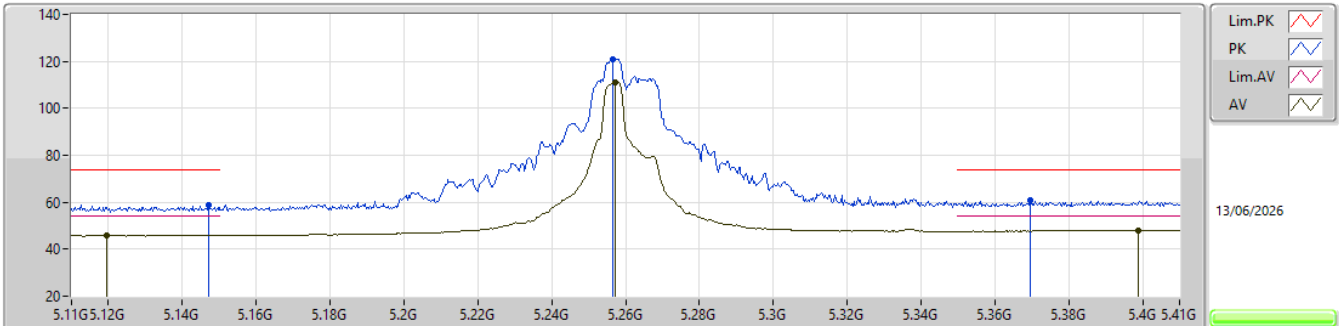EUT_Y_1TX
Setting 24
03-Y-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1472G	58.95	74.00	-15.05	52.77	3	Horizontal	136	1.80	-	34.10	7.01	34.93			
AV	5.1196G	45.92	54.00	-8.08	39.78	3	Horizontal	136	1.80	-	34.10	6.98	34.94			
PK	5.2567G	121.07	Inf	-Inf	114.54	3	Horizontal	136	1.80	-	34.34	7.10	34.91			
AV	5.2573G	111.15	Inf	-Inf	104.62	3	Horizontal	136	1.80	-	34.34	7.10	34.91			
PK	5.3695G	60.89	74.00	-13.11	53.96	3	Horizontal	136	1.80	-	34.64	7.18	34.89			
AV	5.3989G	48.02	54.00	-5.98	41.00	3	Horizontal	136	1.80	-	34.70	7.20	34.88			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5260MHz_TX

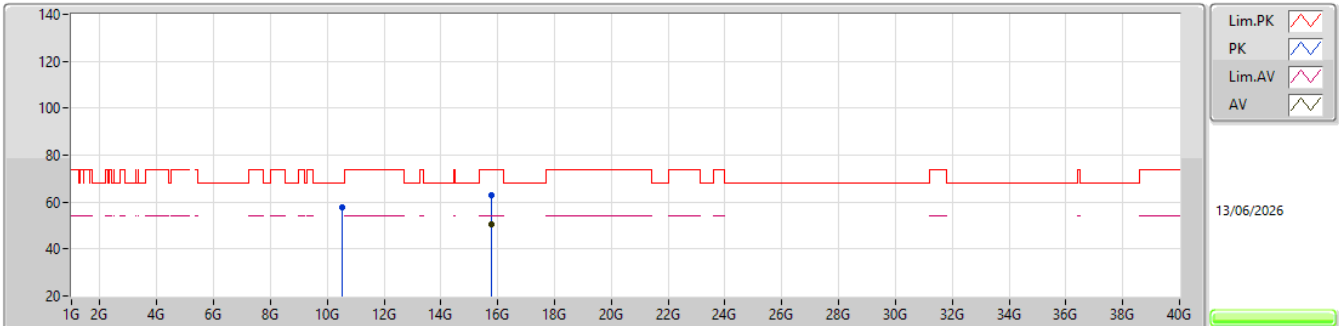EUT_Y_1TX
Setting 24
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51358G	57.99	68.20	-10.21	76.01	3	Vertical	163	2.23	-	38.20	10.43	66.65			
PK	15.76992G	63.05	74.00	-10.95	76.88	3	Vertical	194.9	2.63	-	37.82	12.30	63.95			
AV	15.77058G	50.45	54.00	-3.55	64.28	3	Vertical	194.9	2.63	-	37.82	12.30	63.95			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5260MHz_TX

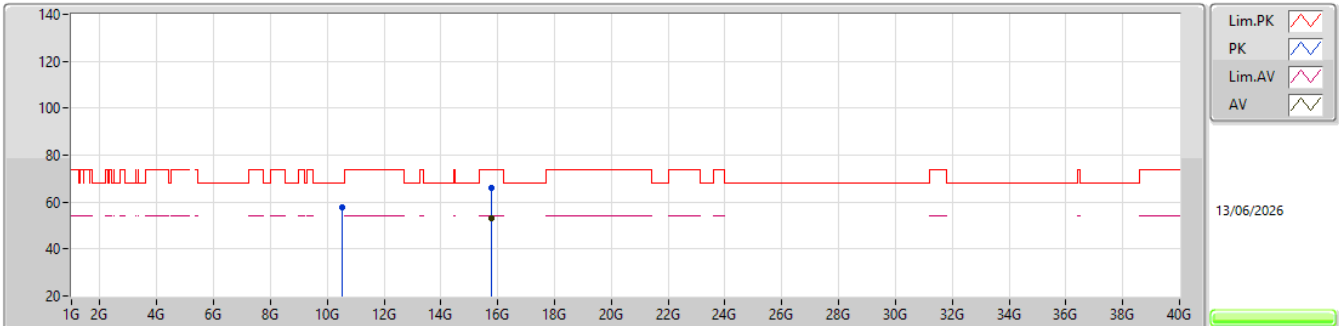EUT_Y_1TX
Setting 24
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51405G	57.68	68.20	-10.52	75.70	3	Horizontal	136	2.78	-	38.20	10.43	66.65			
PK	15.7706G	65.86	74.00	-8.14	79.69	3	Horizontal	240	1.72	-	37.82	12.30	63.95			
AV	15.7706G	52.98	54.00	-1.02	66.81	3	Horizontal	240	1.72	-	37.82	12.30	63.95			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5260MHz_TX

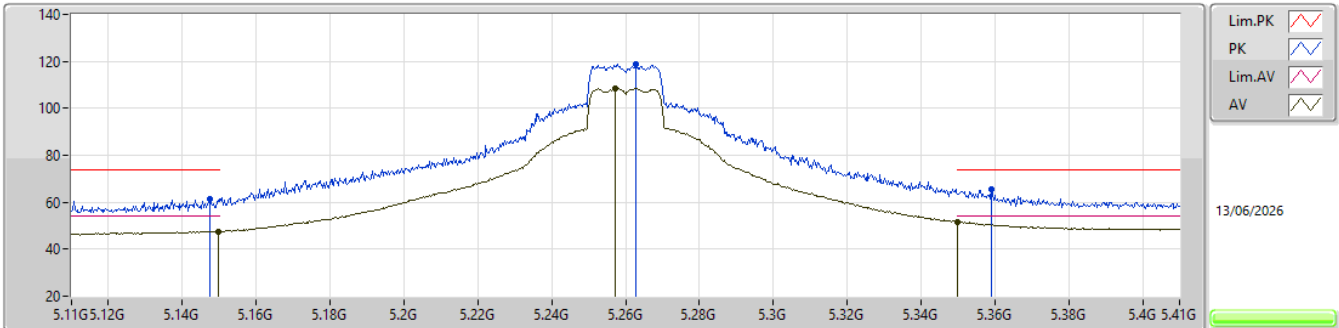EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1475G	61.43	74.00	-12.57	55.25	3	Vertical	220	2.67	-	34.10	7.01	34.93			
AV	5.1499G	47.63	54.00	-6.37	41.45	3	Vertical	220	2.67	-	34.10	7.01	34.93			
PK	5.2627G	118.71	Inf	-Inf	112.14	3	Vertical	220	2.67	-	34.38	7.10	34.91			
AV	5.2573G	108.44	Inf	-Inf	101.91	3	Vertical	220	2.67	-	34.34	7.10	34.91			
PK	5.359G	65.73	74.00	-8.27	58.83	3	Vertical	220	2.67	-	34.62	7.17	34.89			
AV	5.35G	51.66	54.00	-2.34	44.78	3	Vertical	220	2.67	-	34.60	7.17	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5260MHz_TX

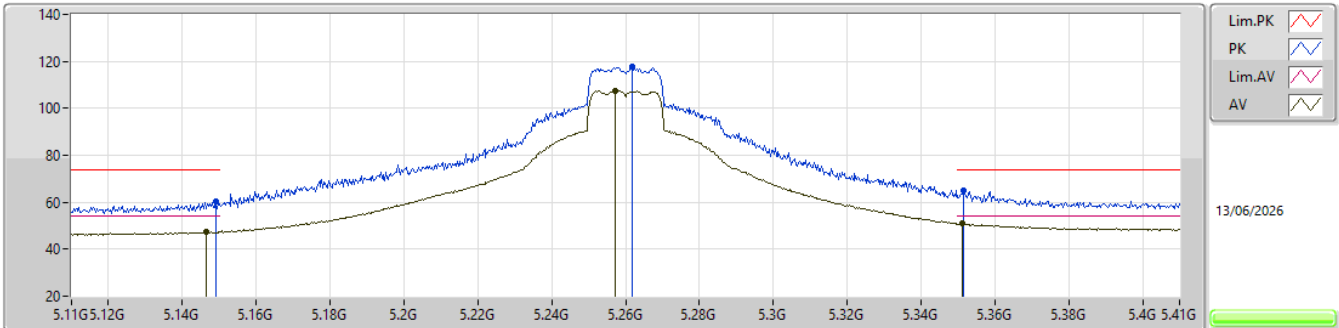EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.149G	60.11	74.00	-13.89	53.93	3	Horizontal	48	1.88	-	34.10	7.01	34.93
AV	5.1466G	47.30	54.00	-6.70	41.12	3	Horizontal	48	1.88	-	34.10	7.01	34.93
PK	5.2618G	117.68	Inf	-Inf	111.12	3	Horizontal	48	1.88	-	34.37	7.10	34.91
AV	5.2573G	107.54	Inf	-Inf	101.01	3	Horizontal	48	1.88	-	34.34	7.10	34.91
PK	5.3515G	65.01	74.00	-8.99	58.13	3	Horizontal	48	1.88	-	34.60	7.17	34.89
AV	5.3512G	51.02	54.00	-2.98	44.14	3	Horizontal	48	1.88	-	34.60	7.17	34.89

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5260MHz_TX

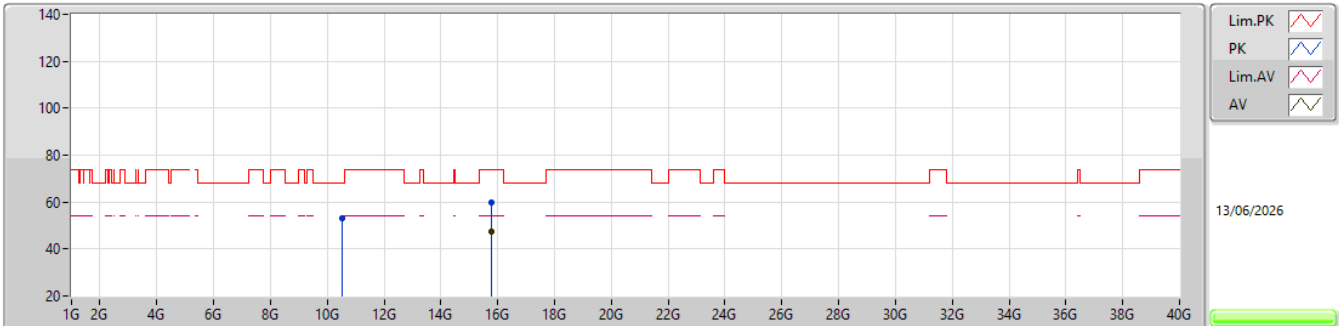EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5191G	53.08	68.20	-15.12	71.09	3	Vertical	162	2.19	-	38.20	10.43	66.64			
PK	15.77965G	59.71	74.00	-14.29	73.58	3	Vertical	191	2.60	-	37.78	12.30	63.95			
AV	15.7782G	47.52	54.00	-6.48	61.38	3	Vertical	191	2.60	-	37.79	12.30	63.95			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5260MHz_TX

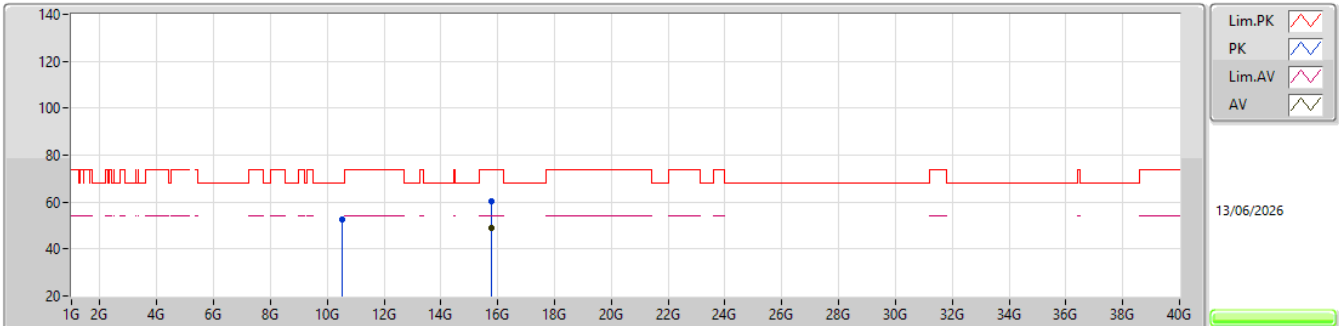EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51955G	52.35	68.20	-15.85	70.36	3	Horizontal	134	2.82	-	38.20	10.43	66.64			
PK	15.78135G	60.38	74.00	-13.62	74.26	3	Horizontal	241	1.74	-	37.77	12.30	63.95			
AV	15.77685G	49.02	54.00	-4.98	62.88	3	Horizontal	241	1.74	-	37.79	12.30	63.95			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5320MHz_TX

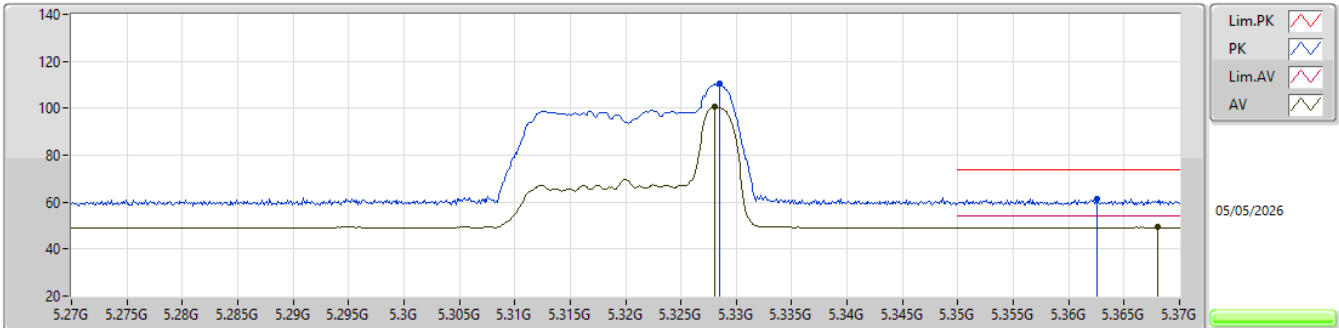


EUT_Y_1TX
Setting 9.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3285G	110.57	Inf	-Inf	103.71	3	Vertical	29	2.66	-	34.60	7.15	34.89			
AV	5.328G	100.56	Inf	-Inf	93.70	3	Vertical	29	2.66	-	34.60	7.15	34.89			
PK	5.3626G	61.27	74.00	-12.73	54.36	3	Vertical	29	2.66	-	34.63	7.17	34.89			
AV	5.368G	49.26	54.00	-4.74	42.33	3	Vertical	29	2.66	-	34.64	7.18	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5320MHz_TX

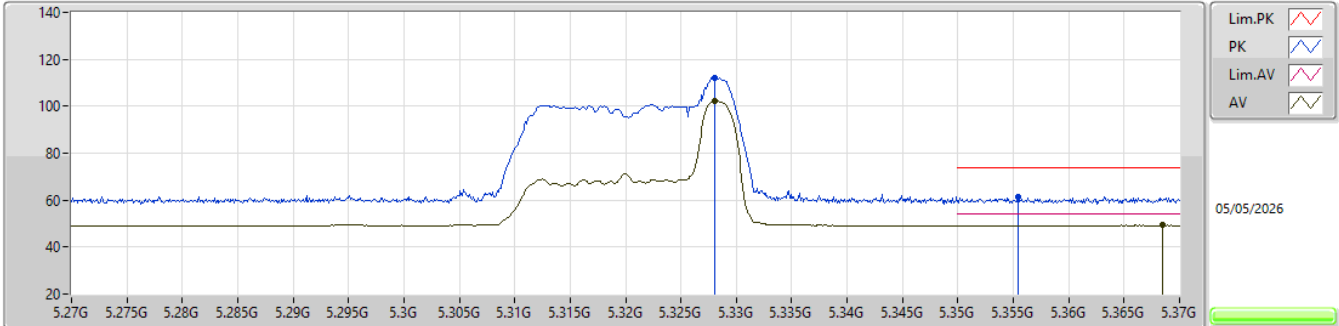


EUT_Y_1TX
Setting 9.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.328G	112.18	Inf	-Inf	105.32	3	Horizontal	184	1.80	-	34.60	7.15	34.89			
AV	5.328G	102.33	Inf	-Inf	95.47	3	Horizontal	184	1.80	-	34.60	7.15	34.89			
PK	5.3554G	61.37	74.00	-12.63	54.48	3	Horizontal	184	1.80	-	34.61	7.17	34.89			
AV	5.3685G	49.27	54.00	-4.73	42.34	3	Horizontal	184	1.80	-	34.64	7.18	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU8_1TX


5320MHz_TX

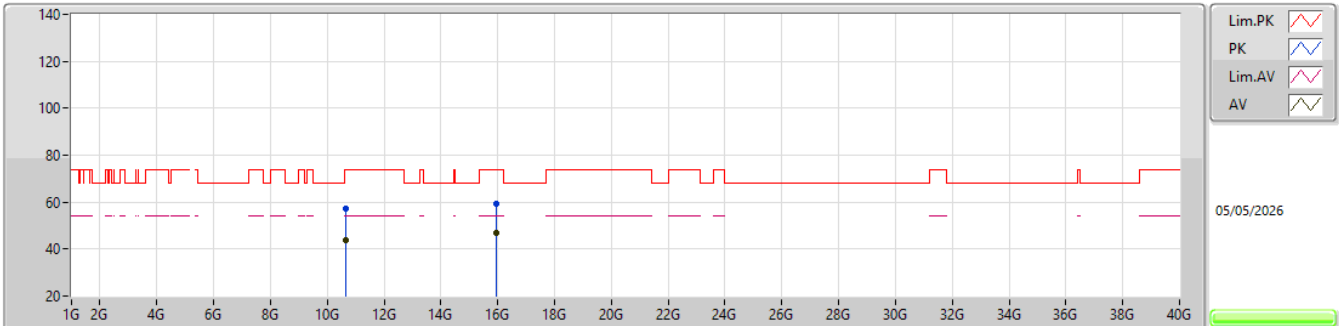EUT_Y_1TX
Setting 9.5
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63802G	57.21	74.00	-16.79	43.36	3	Vertical	174	2.18	-	38.30	10.47	34.92			
AV	10.6393G	43.83	54.00	-10.17	29.99	3	Vertical	174	2.18	-	38.30	10.47	34.93			
PK	15.96105G	59.24	74.00	-14.76	44.26	3	Vertical	253	2.86	-	37.74	12.38	35.14			
AV	15.96164G	46.78	54.00	-7.22	31.79	3	Vertical	253	2.86	-	37.75	12.38	35.14			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5320MHz_TX

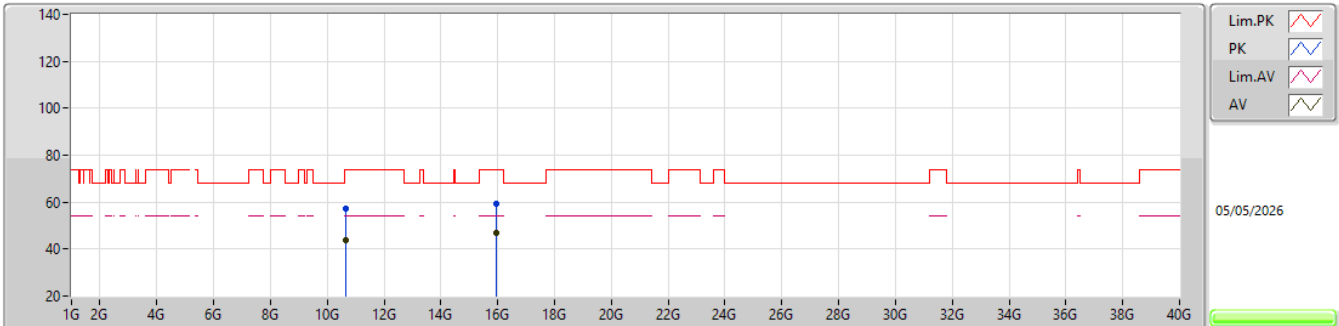


EUT_Y_1TX
Setting 9.5
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63843G	57.22	74.00	-16.78	43.37	3	Horizontal	40	2.37	-	38.30	10.47	34.92			
AV	10.6409G	43.90	54.00	-10.10	30.06	3	Horizontal	40	2.37	-	38.30	10.47	34.93			
PK	15.96226G	59.32	74.00	-14.68	44.33	3	Horizontal	324	1.92	-	37.75	12.38	35.14			
AV	15.96134G	46.78	54.00	-7.22	31.79	3	Horizontal	324	1.92	-	37.75	12.38	35.14			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5320MHz_TX

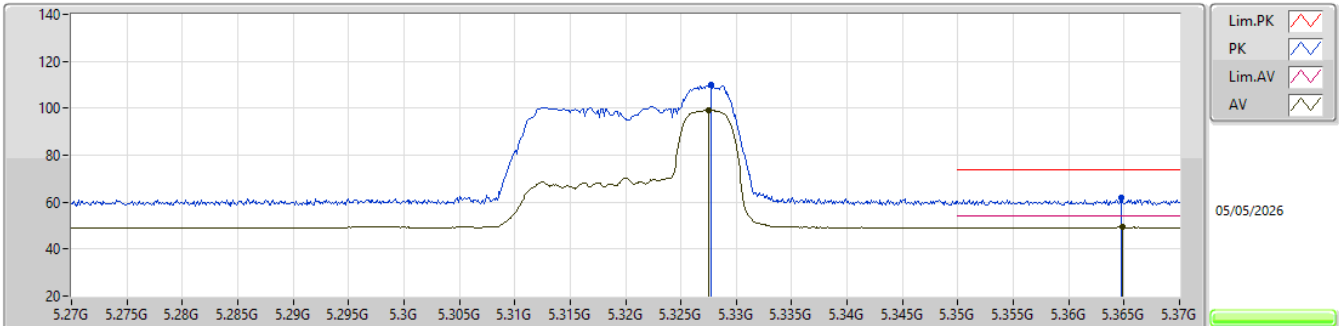


EUT_Y_1TX
Setting 11
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3277G	109.86	Inf	-Inf	103.00	3	Vertical	28	2.70	-	34.60	7.15	34.89				
AV	5.3275G	99.11	Inf	-Inf	92.25	3	Vertical	28	2.70	-	34.60	7.15	34.89				
PK	5.3647G	61.90	74.00	-12.10	54.98	3	Vertical	28	2.70	-	34.63	7.18	34.89				
AV	5.3649G	49.24	54.00	-4.76	42.32	3	Vertical	28	2.70	-	34.63	7.18	34.89				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5320MHz_TX

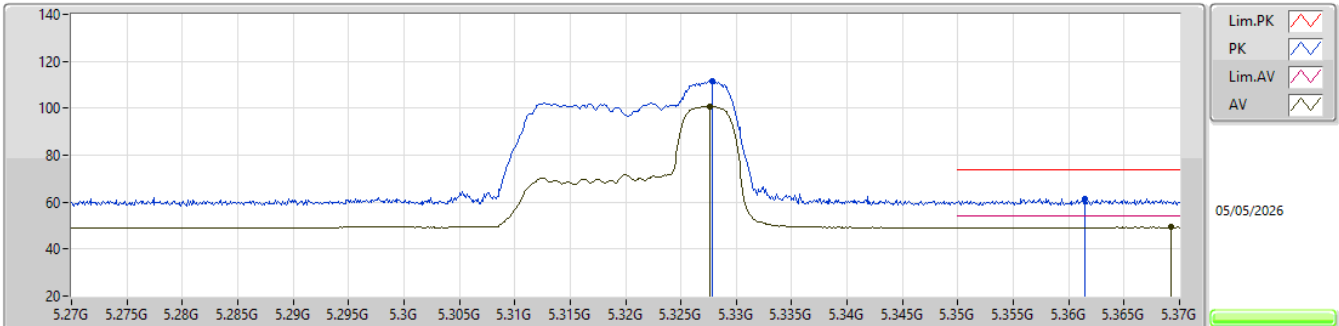


EUT_Y_1TX
Setting 11
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3278G	111.52	Inf	-Inf	104.66	3	Horizontal	188	1.94	-	34.60	7.15	34.89			
AV	5.3276G	100.82	Inf	-Inf	93.96	3	Horizontal	188	1.94	-	34.60	7.15	34.89			
PK	5.3615G	61.46	74.00	-12.54	54.56	3	Horizontal	188	1.94	-	34.62	7.17	34.89			
AV	5.3692G	49.27	54.00	-4.73	42.34	3	Horizontal	188	1.94	-	34.64	7.18	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5320MHz_TX

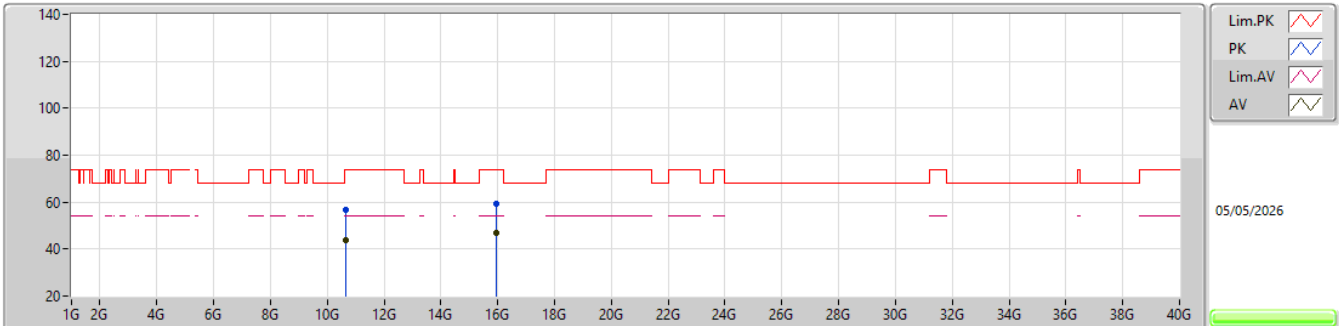


EUT_Y_1TX
Setting 11
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63903G	56.81	74.00	-17.19	42.97	3	Vertical	87	1.09	-	38.30	10.47	34.93			
AV	10.6406G	43.90	54.00	-10.10	30.06	3	Vertical	87	1.09	-	38.30	10.47	34.93			
PK	15.9621G	59.22	74.00	-14.78	44.23	3	Vertical	116	2.44	-	37.75	12.38	35.14			
AV	15.96169G	46.78	54.00	-7.22	31.79	3	Vertical	116	2.44	-	37.75	12.38	35.14			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5320MHz_TX

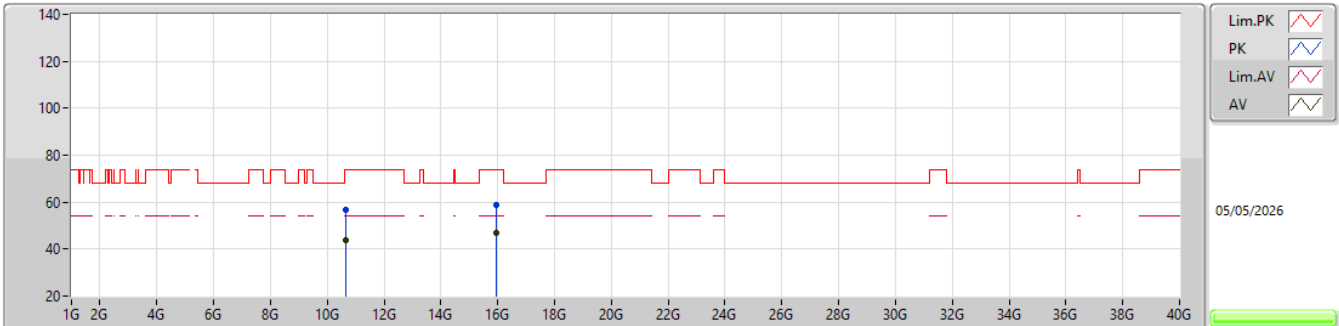


EUT_Y_1TX
Setting 11
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64062G	56.68	74.00	-17.32	42.84	3	Horizontal	26	1.98	-	38.30	10.47	34.93			
AV	10.64102G	43.90	54.00	-10.10	30.06	3	Horizontal	26	1.98	-	38.30	10.47	34.93			
PK	15.96047G	58.84	74.00	-15.16	43.86	3	Horizontal	142	1.84	-	37.74	12.38	35.14			
AV	15.9617G	46.78	54.00	-7.22	31.79	3	Horizontal	142	1.84	-	37.75	12.38	35.14			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5320MHz_TX

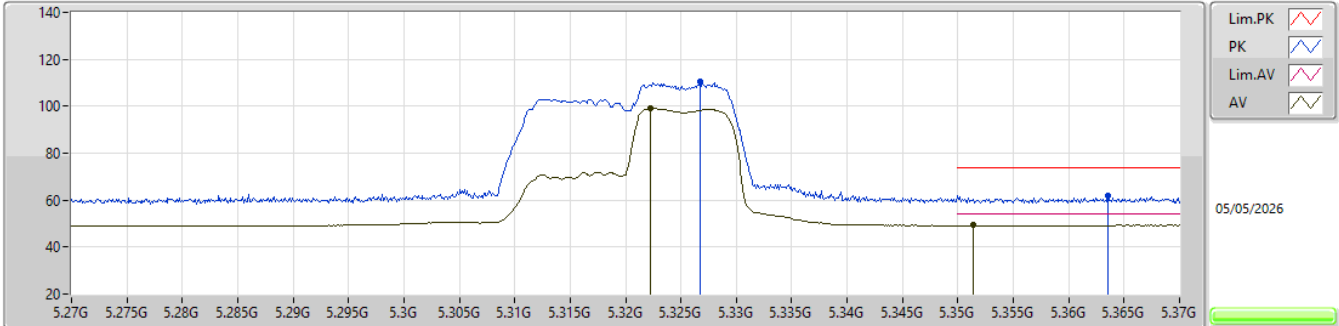


EUT_Y_1TX
Setting 14
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3267G	110.65	Inf	-Inf	103.79	3	Vertical	30	2.72	-	34.60	7.15	34.89			
AV	5.3223G	98.94	Inf	-Inf	92.09	3	Vertical	30	2.72	-	34.60	7.15	34.90			
PK	5.3635G	61.79	74.00	-12.21	54.88	3	Vertical	30	2.72	-	34.63	7.17	34.89			
AV	5.3514G	49.33	54.00	-4.67	42.45	3	Vertical	30	2.72	-	34.60	7.17	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5320MHz_TX

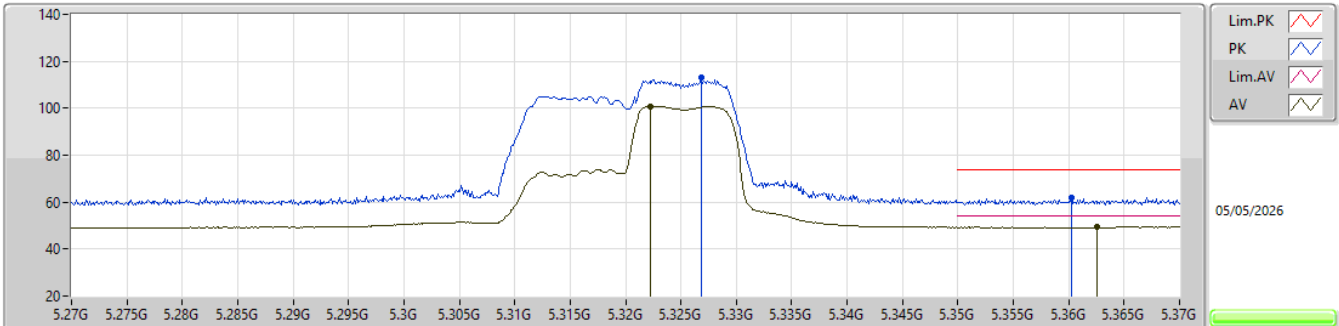


EUT_Y_1TX
Setting 14
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3268G	112.94	Inf	-Inf	106.08	3	Horizontal	186	1.93	-	34.60	7.15	34.89			
AV	5.3223G	100.90	Inf	-Inf	94.05	3	Horizontal	186	1.93	-	34.60	7.15	34.90			
PK	5.3603G	61.76	74.00	-12.24	54.86	3	Horizontal	186	1.93	-	34.62	7.17	34.89			
AV	5.3626G	49.42	54.00	-4.58	42.51	3	Horizontal	186	1.93	-	34.63	7.17	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU106,#RU54_1TX


5320MHz_TX

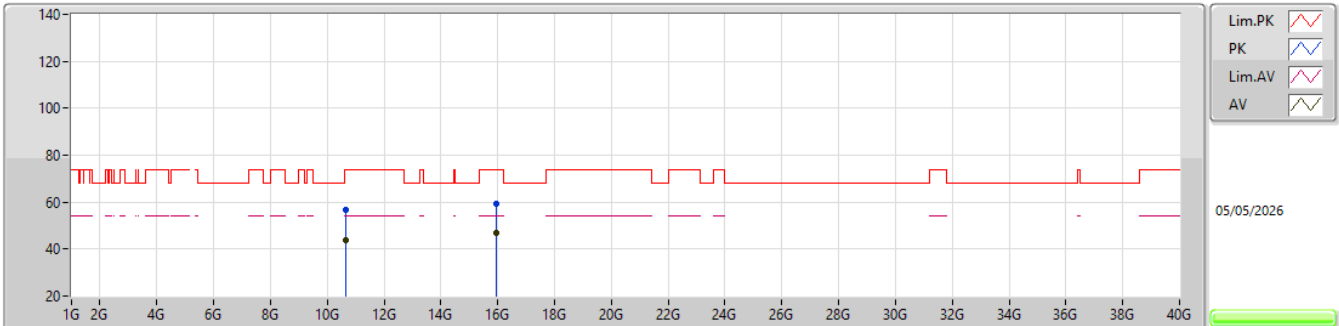EUT_Y_1TX
Setting 14
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63889G	56.66	74.00	-17.34	42.82	3	Vertical	302	2.98	-	38.30	10.47	34.93			
AV	10.64097G	43.90	54.00	-10.10	30.06	3	Vertical	302	2.98	-	38.30	10.47	34.93			
PK	15.96031G	59.15	74.00	-14.85	44.17	3	Vertical	348	1.28	-	37.74	12.38	35.14			
AV	15.96128G	46.78	54.00	-7.22	31.79	3	Vertical	348	1.28	-	37.75	12.38	35.14			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU106,#RU54_1TX


5320MHz_TX

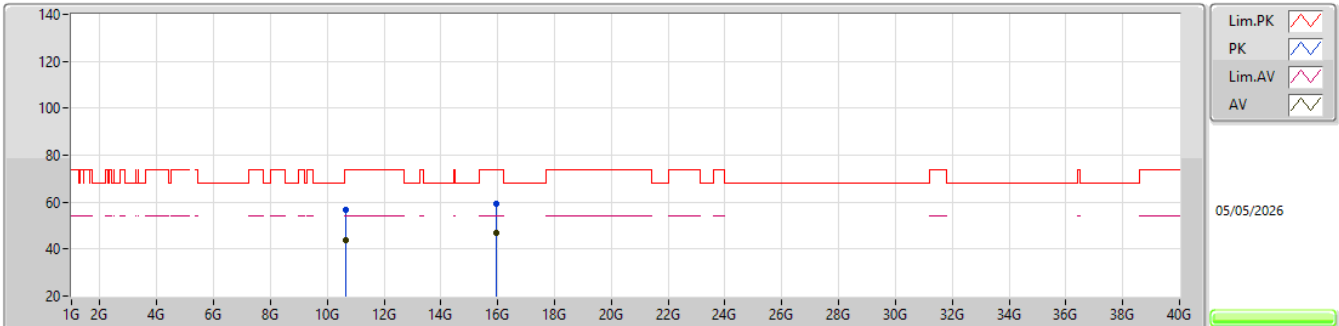EUT_Y_1TX
Setting 14
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63944G	56.76	74.00	-17.24	42.92	3	Horizontal	109	2.35	-	38.30	10.47	34.93			
AV	10.64094G	43.90	54.00	-10.10	30.06	3	Horizontal	109	2.35	-	38.30	10.47	34.93			
PK	15.95856G	59.20	74.00	-14.80	44.23	3	Horizontal	284	2.62	-	37.73	12.38	35.14			
AV	15.96156G	46.78	54.00	-7.22	31.79	3	Horizontal	284	2.62	-	37.75	12.38	35.14			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5320MHz_TX

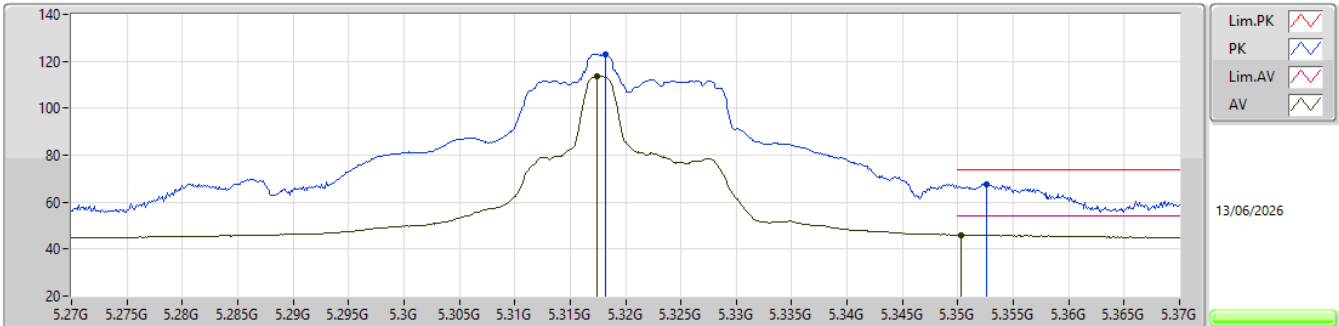


EUT_Y_1TX
Setting 21
03-Y-G-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3182G	122.97	Inf	-Inf	116.13	3	Vertical	220	2.70	-	34.60	7.14	34.90			
AV	5.3174G	113.65	Inf	-Inf	106.81	3	Vertical	220	2.70	-	34.60	7.14	34.90			
PK	5.3526G	67.65	74.00	-6.35	60.76	3	Vertical	220	2.70	-	34.61	7.17	34.89			
AV	5.3503G	45.99	54.00	-8.01	39.11	3	Vertical	220	2.70	-	34.60	7.17	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5320MHz_TX

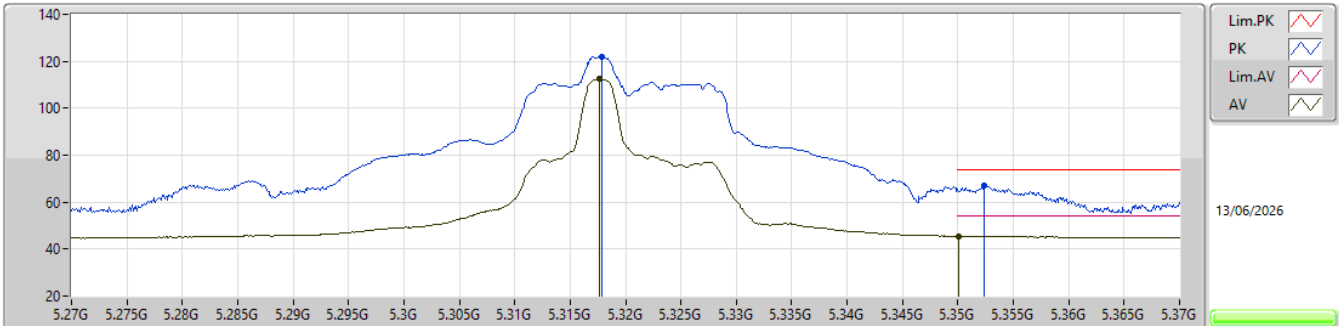


EUT_Y_1TX
Setting 21
03-Y-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3179G	121.81	Inf	-Inf	114.97	3	Horizontal	48	2.08	-	34.60	7.14	34.90			
AV	5.3176G	112.35	Inf	-Inf	105.51	3	Horizontal	48	2.08	-	34.60	7.14	34.90			
PK	5.3524G	66.97	74.00	-7.03	60.09	3	Horizontal	48	2.08	-	34.60	7.17	34.89			
AV	5.3501G	45.52	54.00	-8.48	38.64	3	Horizontal	48	2.08	-	34.60	7.17	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5320MHz_TX

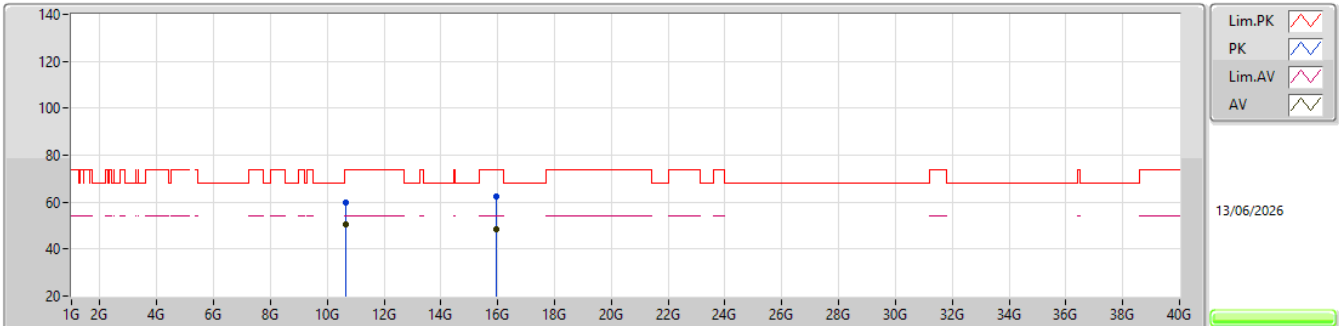EUT_Y_1TX
Setting 21
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63535G	59.68	74.00	-14.32	77.44	3	Vertical	136	1.75	-	38.30	10.47	66.53			
AV	10.6353G	50.48	54.00	-3.52	68.24	3	Vertical	136	1.75	-	38.30	10.47	66.53			
PK	15.9533G	62.36	74.00	-11.64	76.24	3	Vertical	202	2.62	-	37.71	12.38	63.97			
AV	15.95295G	48.46	54.00	-5.54	62.34	3	Vertical	202	2.62	-	37.71	12.38	63.97			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5320MHz_TX

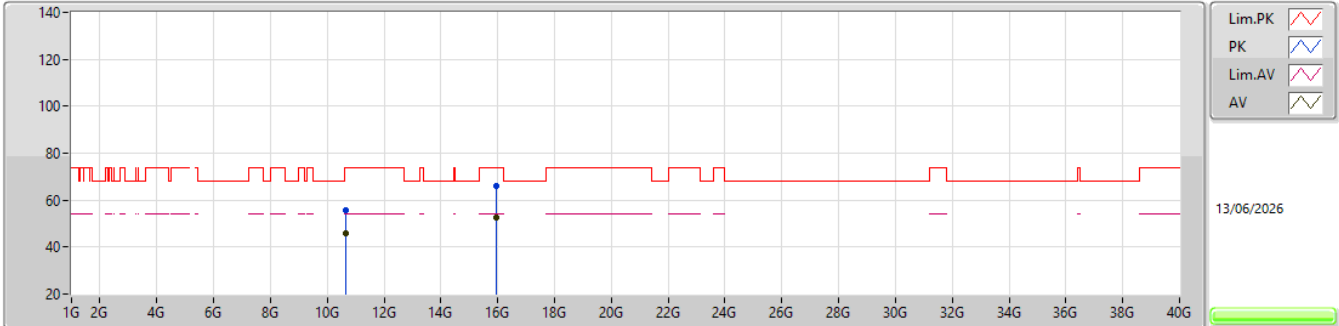


EUT_Y_1TX
Setting 21
03-Y-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.6348G	55.66	74.00	-18.34	73.42	3	Horizontal	177	2.20	-	38.30	10.47	66.53			
AV	10.6353G	45.84	54.00	-8.16	63.60	3	Horizontal	177	2.20	-	38.30	10.47	66.53			
PK	15.9541G	65.78	74.00	-8.22	79.65	3	Horizontal	127	2.54	-	37.72	12.38	63.97			
AV	15.95305G	52.39	54.00	-1.61	66.27	3	Horizontal	127	2.54	-	37.71	12.38	63.97			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5320MHz_TX

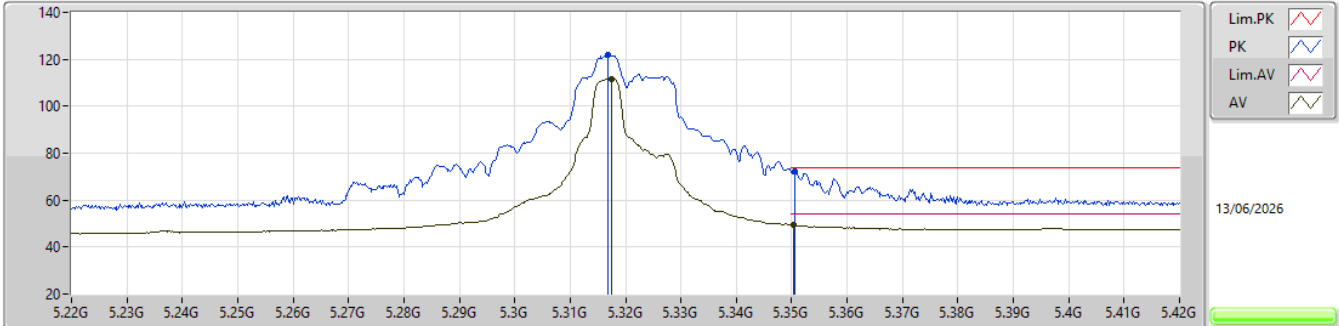


EUT_Y_1TX
Setting 23.5
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3168G	121.78	Inf	-Inf	114.94	3	Vertical	221	2.68	-	34.60	7.14	34.90			
AV	5.3174G	111.72	Inf	-Inf	104.88	3	Vertical	221	2.68	-	34.60	7.14	34.90			
PK	5.3506G	72.34	74.00	-1.66	65.46	3	Vertical	221	2.68	-	34.60	7.17	34.89			
AV	5.3504G	49.38	54.00	-4.62	42.50	3	Vertical	221	2.68	-	34.60	7.17	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5320MHz_TX

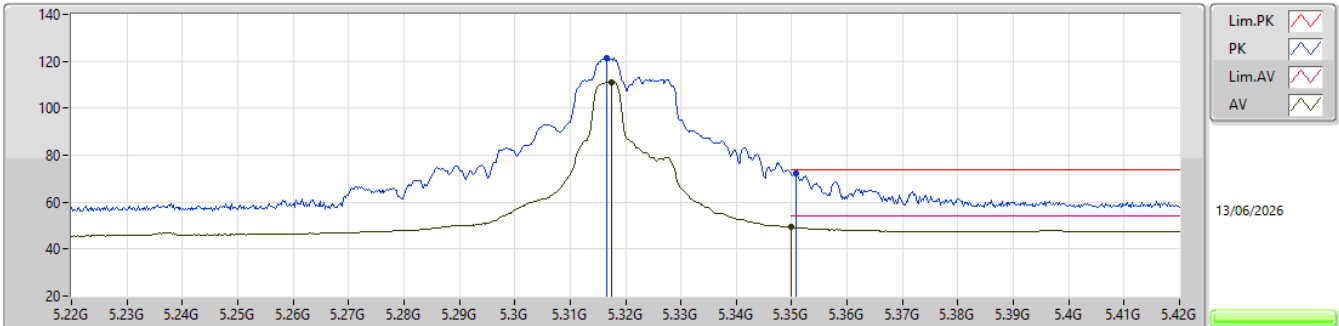


EUT_Y_1TX
Setting 23.5
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3166G	121.31	Inf	-Inf	114.47	3	Horizontal	53	1.92	-	34.60	7.14	34.90				
AV	5.3174G	111.19	Inf	-Inf	104.35	3	Horizontal	53	1.92	-	34.60	7.14	34.90				
PK	5.3508G	72.09	74.00	-1.91	65.21	3	Horizontal	53	1.92	-	34.60	7.17	34.89				
AV	5.35G	49.37	54.00	-4.63	42.49	3	Horizontal	53	1.92	-	34.60	7.17	34.89				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5320MHz_TX

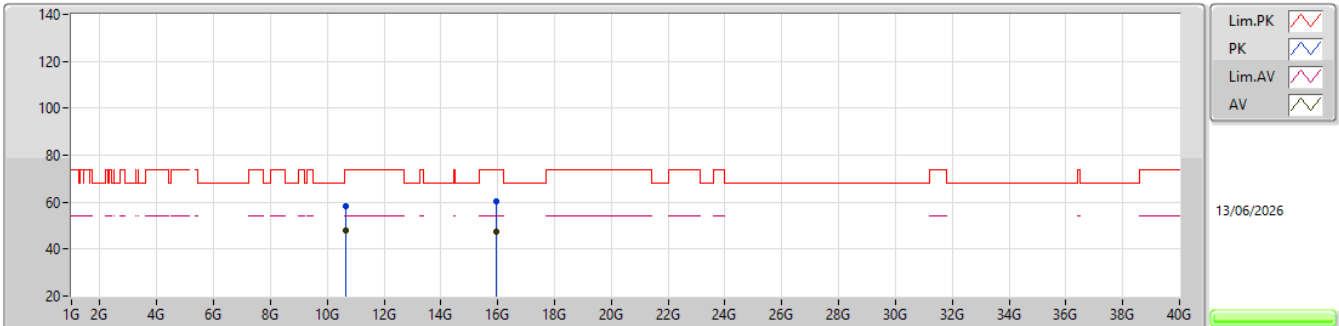


EUT_Y_1TX
Setting 23.5
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63469G	58.23	74.00	-15.77	75.99	3	Vertical	143	1.80	-	38.30	10.47	66.53			
AV	10.63358G	47.99	54.00	-6.01	65.75	3	Vertical	143	1.80	-	38.30	10.47	66.53			
PK	15.95062G	60.25	74.00	-13.75	74.14	3	Vertical	202	2.90	-	37.70	12.38	63.97			
AV	15.95031G	47.31	54.00	-6.69	61.20	3	Vertical	202	2.90	-	37.70	12.38	63.97			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5320MHz_TX

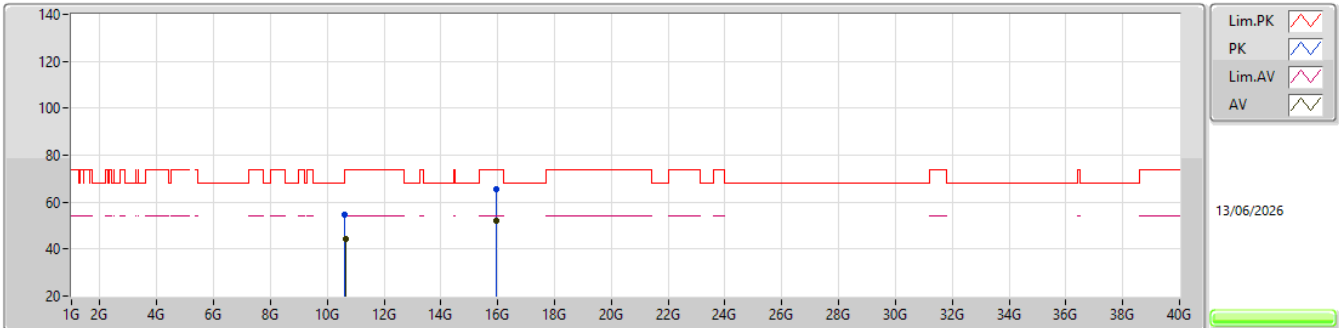


EUT_Y_1TX
Setting 23.5
03-Y-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.6311G	54.52	74.00	-19.48	72.28	3	Horizontal	178	2.18	-	38.30	10.47	66.53				
AV	10.63335G	44.19	54.00	-9.81	61.95	3	Horizontal	178	2.18	-	38.30	10.47	66.53				
PK	15.95001G	65.34	74.00	-8.66	79.23	3	Horizontal	126	2.53	-	37.70	12.38	63.97				
AV	15.95055G	52.18	54.00	-1.82	66.07	3	Horizontal	126	2.53	-	37.70	12.38	63.97				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5320MHz_TX

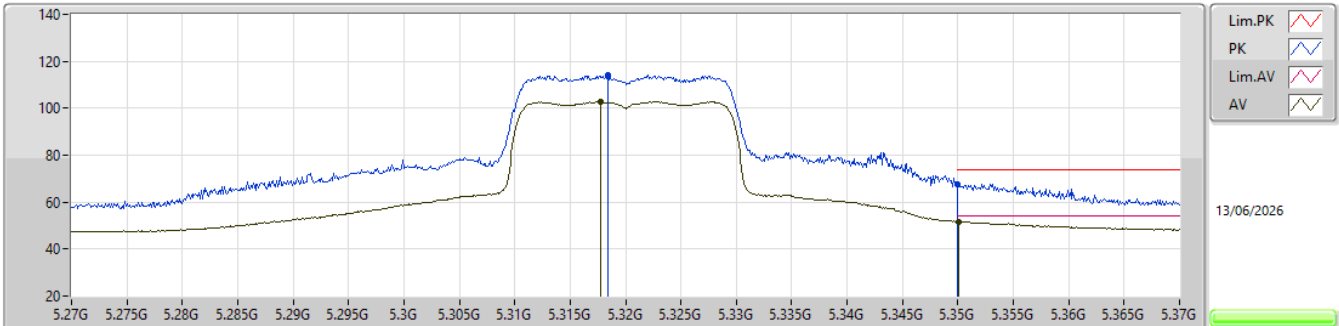


EUT_Y_1TX
Setting 19
03-Y-G-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3184G	114.33	Inf	-Inf	107.49	3	Vertical	218	2.70	-	34.60	7.14	34.90			
AV	5.3178G	102.66	Inf	-Inf	95.82	3	Vertical	218	2.70	-	34.60	7.14	34.90			
PK	5.35G	67.83	74.00	-6.17	60.95	3	Vertical	218	2.70	-	34.60	7.17	34.89			
AV	5.3501G	51.79	54.00	-2.21	44.91	3	Vertical	218	2.70	-	34.60	7.17	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5320MHz_TX

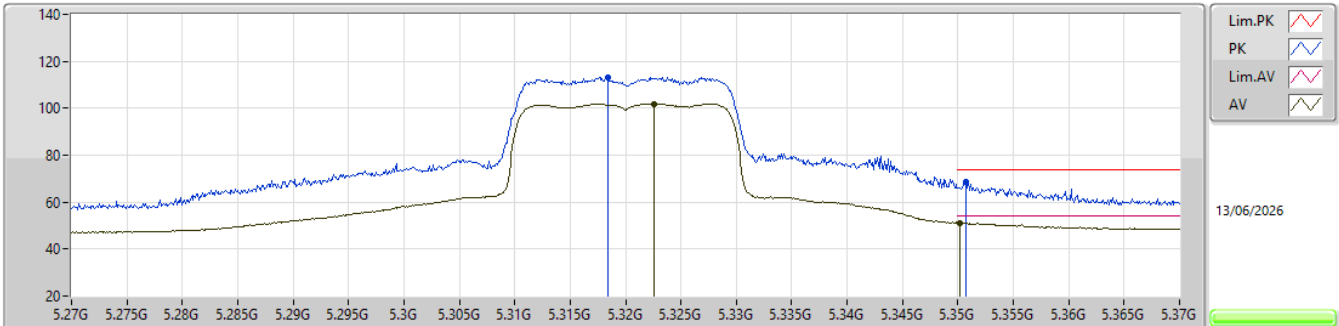EUT_Y_1TX
Setting 19
03-Y-G-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3184G	113.21	Inf	-Inf	106.37	3	Horizontal	134	1.80	-	34.60	7.14	34.90			
AV	5.3226G	101.98	Inf	-Inf	95.13	3	Horizontal	134	1.80	-	34.60	7.15	34.90			
PK	5.3507G	68.45	74.00	-5.55	61.57	3	Horizontal	134	1.80	-	34.60	7.17	34.89			
AV	5.3502G	51.15	54.00	-2.85	44.27	3	Horizontal	134	1.80	-	34.60	7.17	34.89			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5320MHz_TX

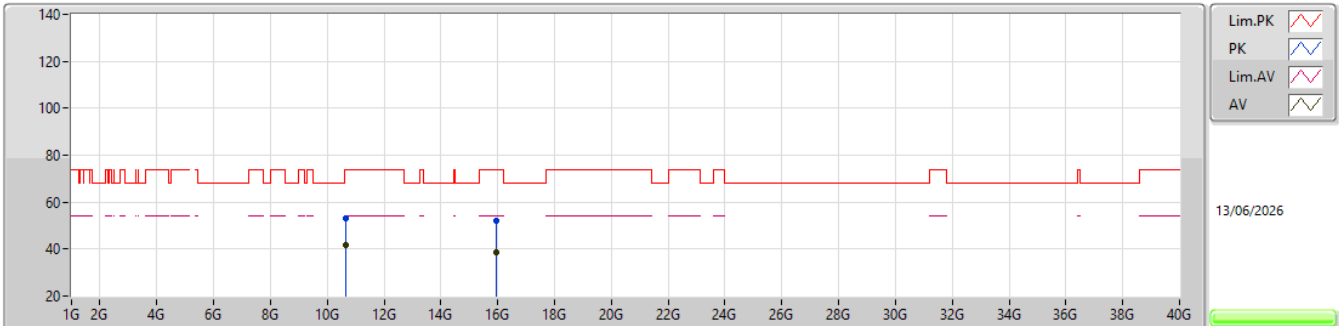


EUT_Y_1TX
Setting 19
03-Y-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.6456G	53.08	74.00	-20.92	70.83	3	Vertical	139	1.80	-	38.30	10.47	66.52			
AV	10.6398G	41.55	54.00	-12.45	59.31	3	Vertical	139	1.80	-	38.30	10.47	66.53			
PK	15.95105G	51.91	74.00	-22.09	65.80	3	Vertical	205	2.58	-	37.70	12.38	63.97			
AV	15.96195G	38.77	54.00	-15.23	52.61	3	Vertical	205	2.58	-	37.75	12.38	63.97			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5320MHz_TX

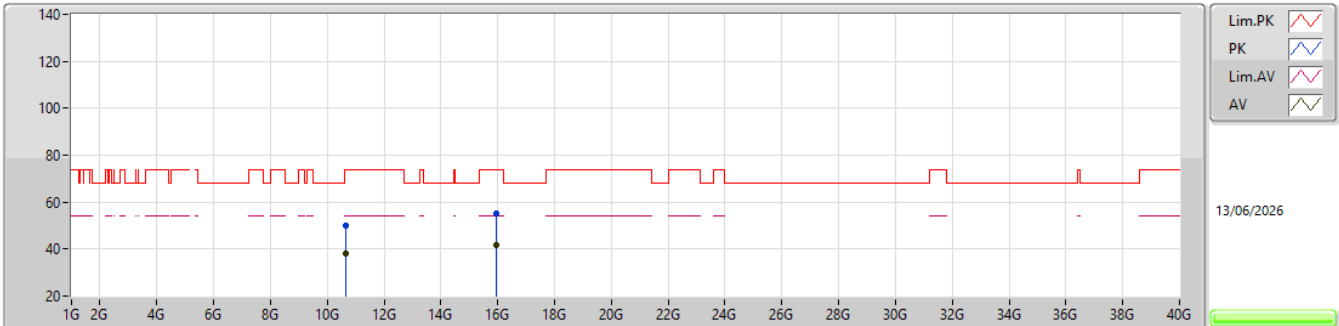


EUT_Y_1TX
Setting 19
03-Y-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.63895G	49.96	74.00	-24.04	67.72	3	Horizontal	166	1.65	-	38.30	10.47	66.53			
AV	10.64G	37.88	54.00	-16.12	55.64	3	Horizontal	166	1.65	-	38.30	10.47	66.53			
PK	15.96415G	55.34	74.00	-18.66	69.17	3	Horizontal	127	2.52	-	37.76	12.38	63.97			
AV	15.9608G	41.93	54.00	-12.07	55.78	3	Horizontal	127	2.52	-	37.74	12.38	63.97			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5500MHz_TX

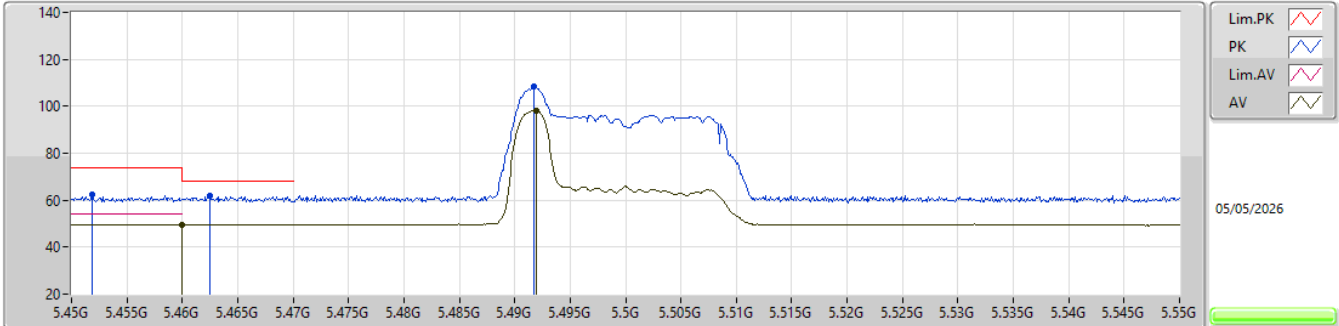


EUT_Y_1TX
Setting 8.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4519G	62.41	74.00	-11.59	55.34	3	Vertical	28	2.10	-	34.70	7.24	34.87			
PK	5.4625G	61.77	68.20	-6.43	54.69	3	Vertical	28	2.10	-	34.70	7.25	34.87			
AV	5.46G	49.59	54.00	-4.41	42.51	3	Vertical	28	2.10	-	34.70	7.25	34.87			
PK	5.4917G	108.69	Inf	-Inf	101.58	3	Vertical	28	2.10	-	34.70	7.27	34.86			
AV	5.4919G	98.17	Inf	-Inf	91.06	3	Vertical	28	2.10	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5500MHz_TX

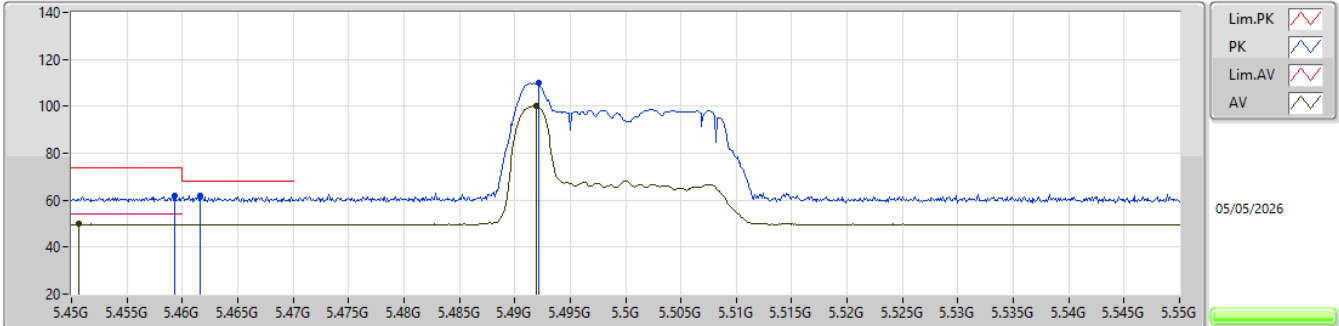


EUT_Y_1TX
Setting 8.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4593G	61.70	74.00	-12.30	54.63	3	Horizontal	188	1.80	-	34.70	7.24	34.87			
AV	5.4507G	49.78	54.00	-4.22	42.71	3	Horizontal	188	1.80	-	34.70	7.24	34.87			
PK	5.4616G	62.14	68.20	-6.06	55.06	3	Horizontal	188	1.80	-	34.70	7.25	34.87			
PK	5.4922G	110.25	Inf	-Inf	103.14	3	Horizontal	188	1.80	-	34.70	7.27	34.86			
AV	5.4919G	100.16	Inf	-Inf	93.05	3	Horizontal	188	1.80	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX


5500MHz_TX

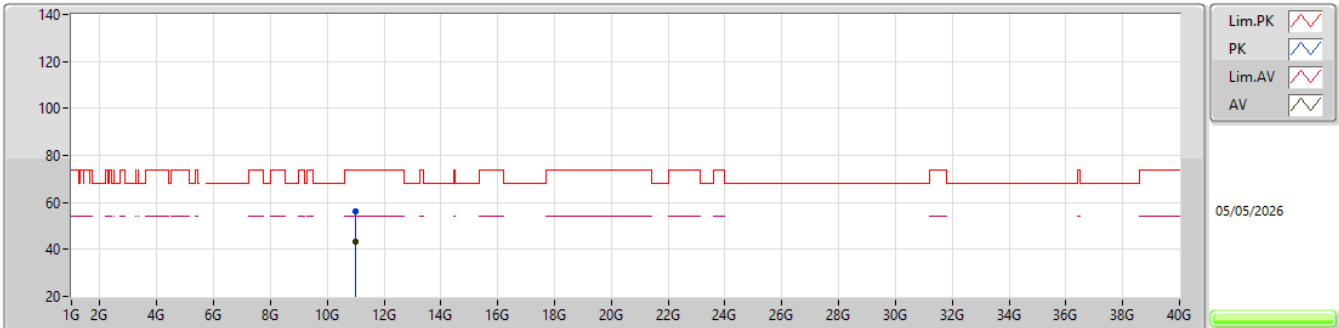EUT_Y_1TX
Setting 8.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.99967G	56.05	74.00	-17.95	42.06	3	Vertical	95	1.04	-	38.40	10.58	34.99			
AV	11.00106G	43.31	54.00	-10.69	29.31	3	Vertical	95	1.04	-	38.40	10.59	34.99			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5500MHz_TX

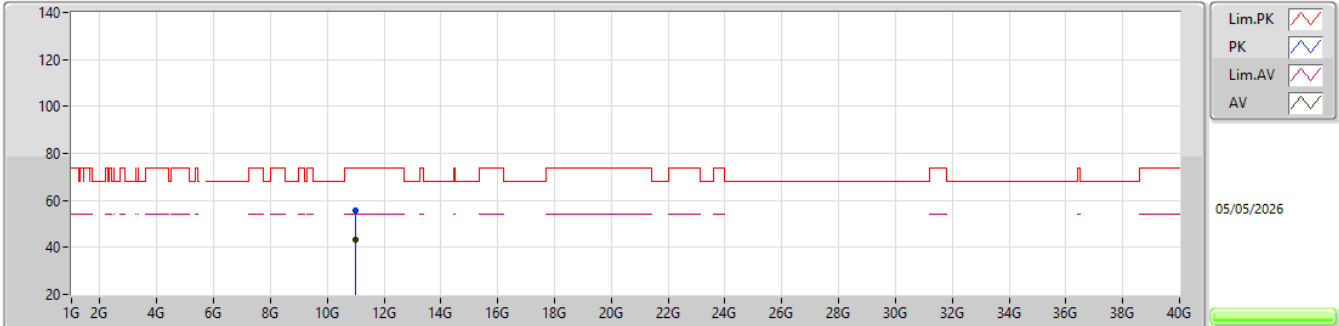


EUT_V_1TX
Setting 8.5
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99794G	55.68	74.00	-18.32	41.69	3	Horizontal	195	1.17	-	38.40	10.58	34.99			
AV	11.00017G	43.25	54.00	-10.75	29.25	3	Horizontal	195	1.17	-	38.40	10.59	34.99			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5500MHz_TX

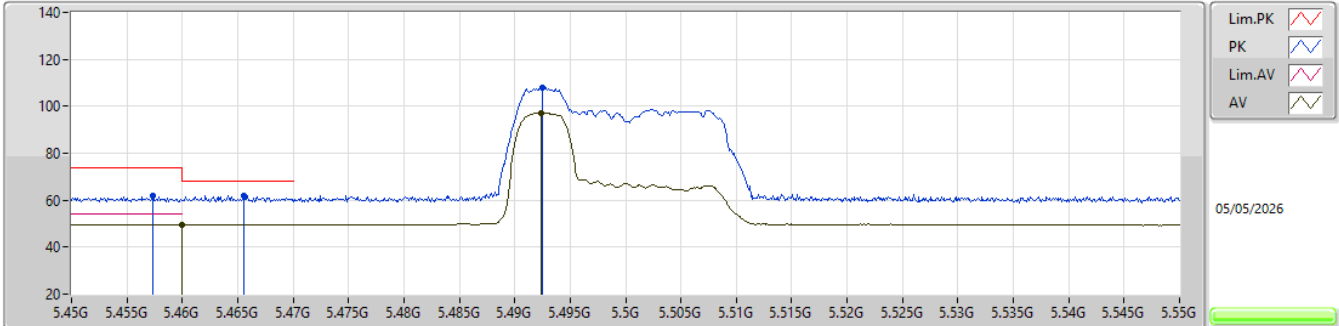


EUT_Y_1TX
Setting 11
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4573G	61.85	74.00	-12.15	54.78	3	Vertical	28	1.80	-	34.70	7.24	34.87			
AV	5.46G	49.59	54.00	-4.41	42.51	3	Vertical	28	1.80	-	34.70	7.25	34.87			
PK	5.4655G	61.99	68.20	-6.21	54.91	3	Vertical	28	1.80	-	34.70	7.25	34.87			
PK	5.4925G	107.75	Inf	-Inf	100.64	3	Vertical	28	1.80	-	34.70	7.27	34.86			
AV	5.4924G	97.23	Inf	-Inf	90.12	3	Vertical	28	1.80	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5500MHz_TX

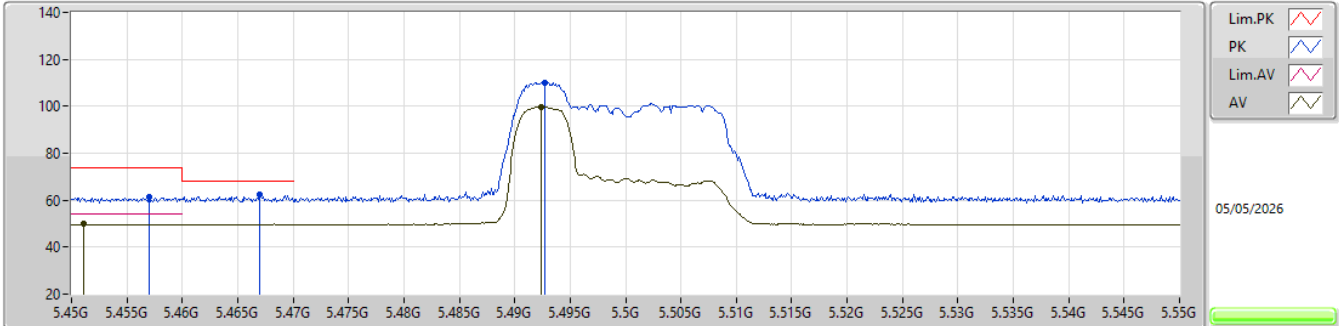


EUT Y_1TX
Setting 11
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.457G	61.47	74.00	-12.53	54.40	3	Horizontal	189	1.80	-	34.70	7.24	34.87			
AV	5.4511G	49.78	54.00	-4.22	42.71	3	Horizontal	189	1.80	-	34.70	7.24	34.87			
PK	5.467G	62.41	68.20	-5.79	55.33	3	Horizontal	189	1.80	-	34.70	7.25	34.87			
PK	5.4927G	110.19	Inf	-Inf	103.08	3	Horizontal	189	1.80	-	34.70	7.27	34.86			
AV	5.4924G	99.61	Inf	-Inf	92.50	3	Horizontal	189	1.80	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX


5500MHz_TX

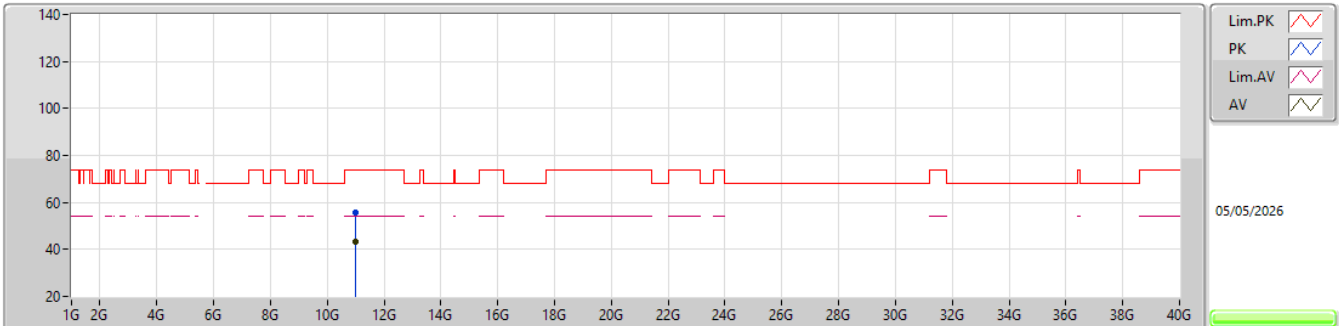EUT_Y_1TX
Setting 11
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00163G	55.71	74.00	-18.29	41.71	3	Vertical	5	1.42	-	38.40	10.59	34.99			
AV	11.00041G	43.25	54.00	-10.75	29.25	3	Vertical	5	1.42	-	38.40	10.59	34.99			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5500MHz_TX

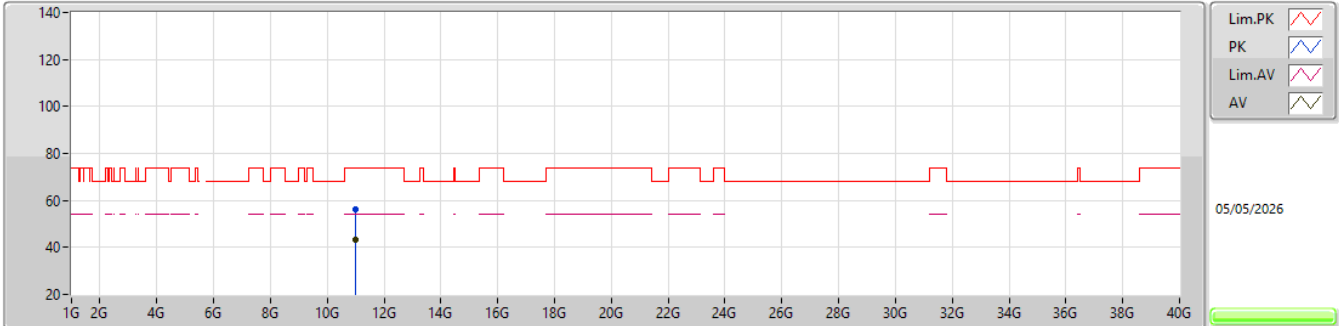


EUT_Y_1TX
Setting 11
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.00019G	56.09	74.00	-17.91	42.09	3	Horizontal	160	1.73	-	38.40	10.59	34.99			
AV	11.00061G	43.25	54.00	-10.75	29.25	3	Horizontal	160	1.73	-	38.40	10.59	34.99			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5500MHz_TX

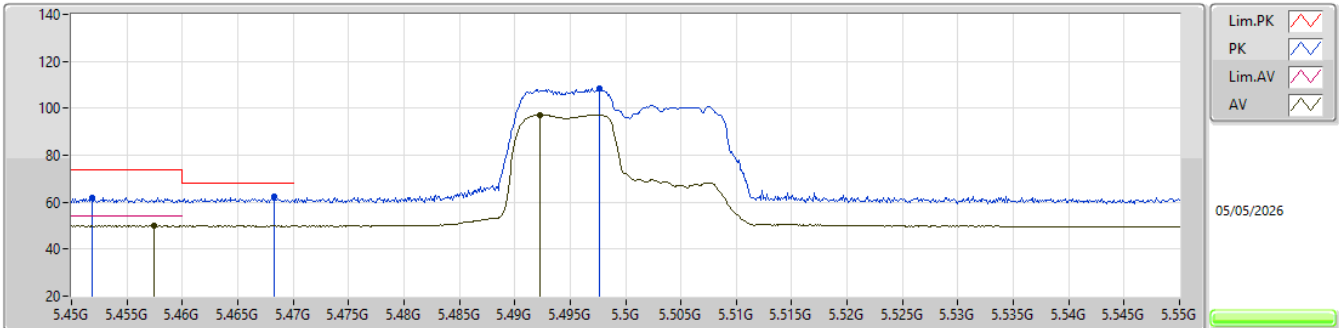


EUT_Y_1TX
Setting 13.5
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4519G	61.84	74.00	-12.16	54.77	3	Vertical	28	2.11	-	34.70	7.24	34.87			
AV	5.4575G	49.80	54.00	-4.20	42.73	3	Vertical	28	2.11	-	34.70	7.24	34.87			
PK	5.4683G	62.16	68.20	-6.04	55.08	3	Vertical	28	2.11	-	34.70	7.25	34.87			
PK	5.4976G	108.35	Inf	-Inf	101.24	3	Vertical	28	2.11	-	34.70	7.27	34.86			
AV	5.4923G	97.24	Inf	-Inf	90.13	3	Vertical	28	2.11	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5500MHz_TX

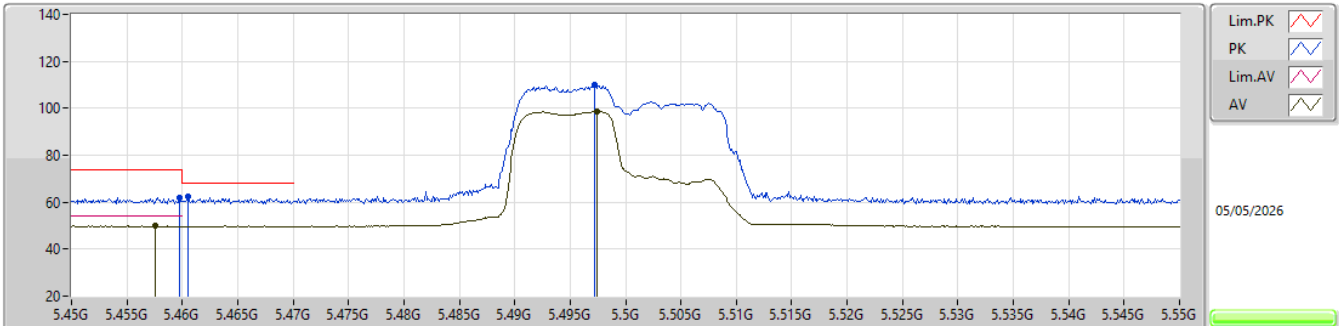


EUT_Y_1TX
Setting 13.5
03-R-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4597G	62.02	74.00	-11.98	54.95	3	Horizontal	190	1.80	-	34.70	7.24	34.87			
AV	5.4576G	49.80	54.00	-4.20	42.73	3	Horizontal	190	1.80	-	34.70	7.24	34.87			
PK	5.4605G	62.24	68.20	-5.96	55.16	3	Horizontal	190	1.80	-	34.70	7.25	34.87			
PK	5.4972G	110.16	Inf	-Inf	103.05	3	Horizontal	190	1.80	-	34.70	7.27	34.86			
AV	5.4974G	98.57	Inf	-Inf	91.46	3	Horizontal	190	1.80	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5500MHz_TX

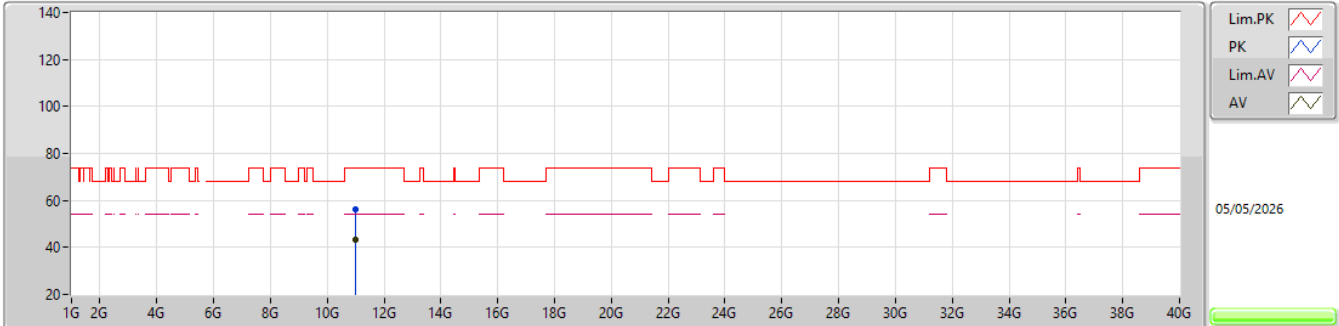


EUT_Y_1TX
Setting 13.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.99989G	55.98	74.00	-18.02	41.99	3	Vertical	36	2.66	-	38.40	10.58	34.99			
AV	11.00038G	43.25	54.00	-10.75	29.25	3	Vertical	36	2.66	-	38.40	10.59	34.99			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX


5500MHz_TX

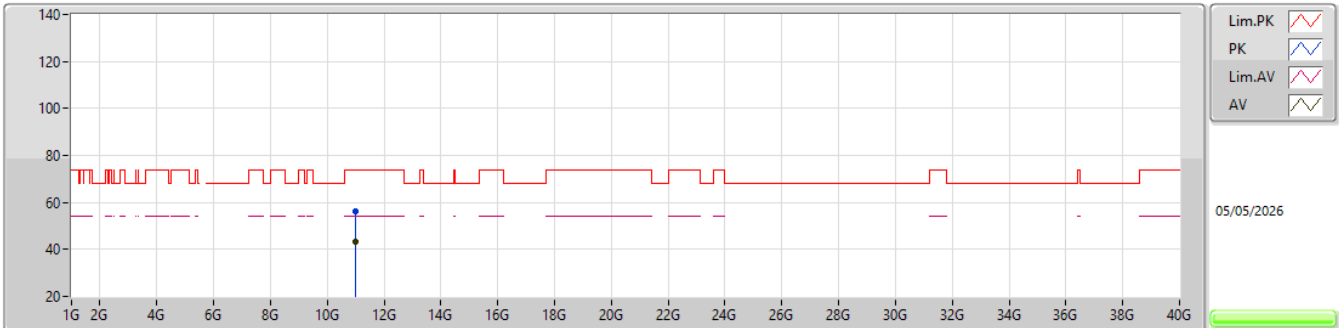EUT_Y_1TX
Setting 13.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.9996G	56.02	74.00	-17.98	42.03	3	Horizontal	16	1.99	-	38.40	10.58	34.99			
AV	11.00048G	43.25	54.00	-10.75	29.25	3	Horizontal	16	1.99	-	38.40	10.59	34.99			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5500MHz_TX

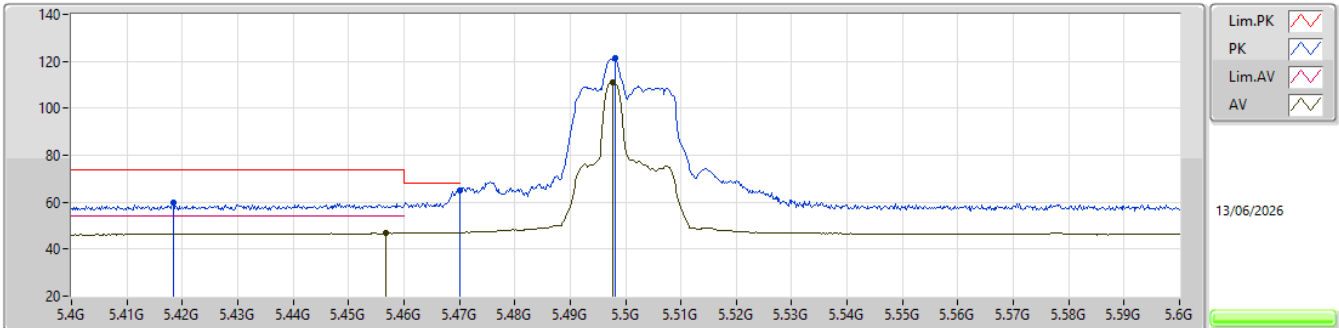


EUT_Y_1TX
Setting 18.5
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4184G	59.89	74.00	-14.11	52.86	3	Vertical	218	2.66	-	34.70	7.21	34.88			
PK	5.47G	65.10	68.20	-3.10	58.02	3	Vertical	218	2.66	-	34.70	7.25	34.87			
AV	5.4568G	46.80	54.00	-7.20	39.73	3	Vertical	218	2.66	-	34.70	7.24	34.87			
PK	5.4982G	121.33	Inf	-Inf	114.22	3	Vertical	218	2.66	-	34.70	7.27	34.86			
AV	5.4976G	110.92	Inf	-Inf	103.81	3	Vertical	218	2.66	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5500MHz_TX

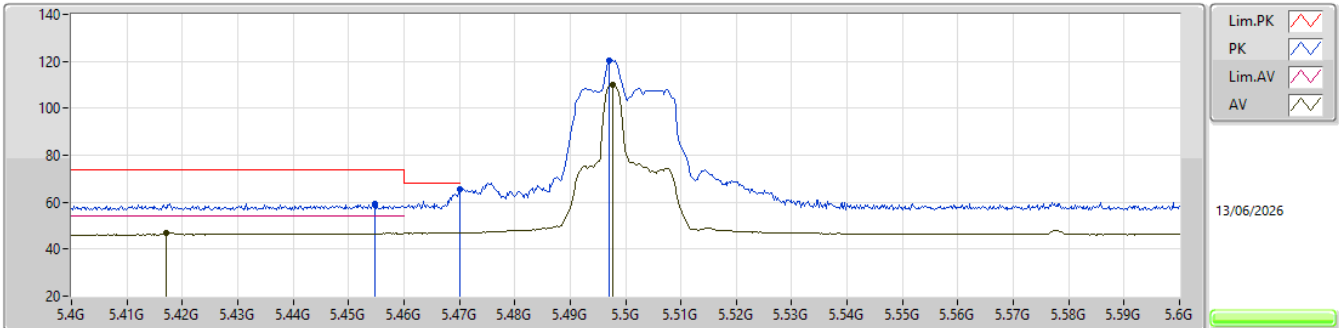


EUT_Y_1TX
Setting 18.5
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4548G	59.38	74.00	-14.62	52.31	3	Horizontal	143	1.85	-	34.70	7.24	34.87			
AV	5.417G	46.95	54.00	-7.05	39.92	3	Horizontal	143	1.85	-	34.70	7.21	34.88			
PK	5.47G	65.58	68.20	-2.62	58.50	3	Horizontal	143	1.85	-	34.70	7.25	34.87			
PK	5.497G	120.43	Inf	-Inf	113.32	3	Horizontal	143	1.85	-	34.70	7.27	34.86			
AV	5.4976G	110.09	Inf	-Inf	102.98	3	Horizontal	143	1.85	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5500MHz_TX

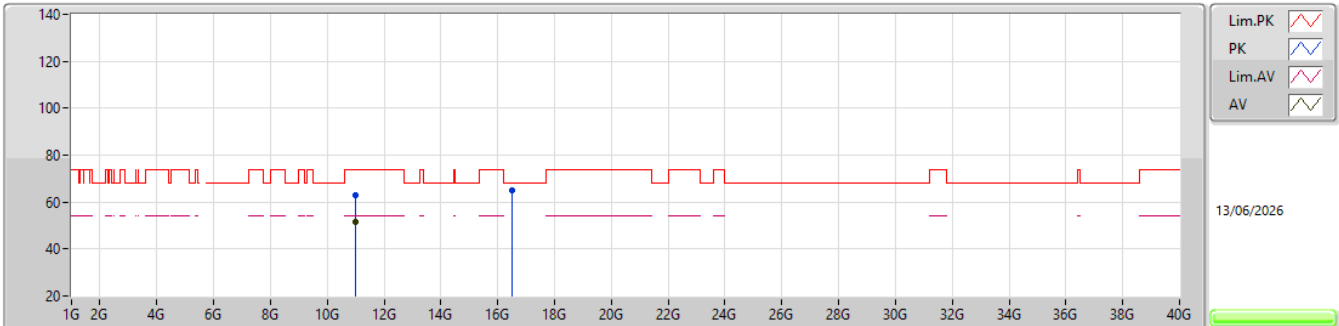EUT_Y_1TX
Setting 18.5
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99559G	62.86	74.00	-11.14	80.05	3	Vertical	170	1.83	-	38.41	10.58	66.18			
AV	10.99529G	51.43	54.00	-2.57	68.62	3	Vertical	170	1.83	-	38.41	10.58	66.18			
PK	16.49412G	65.23	68.20	-2.97	77.90	3	Vertical	153	1.80	-	38.21	12.61	63.49			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5500MHz_TX

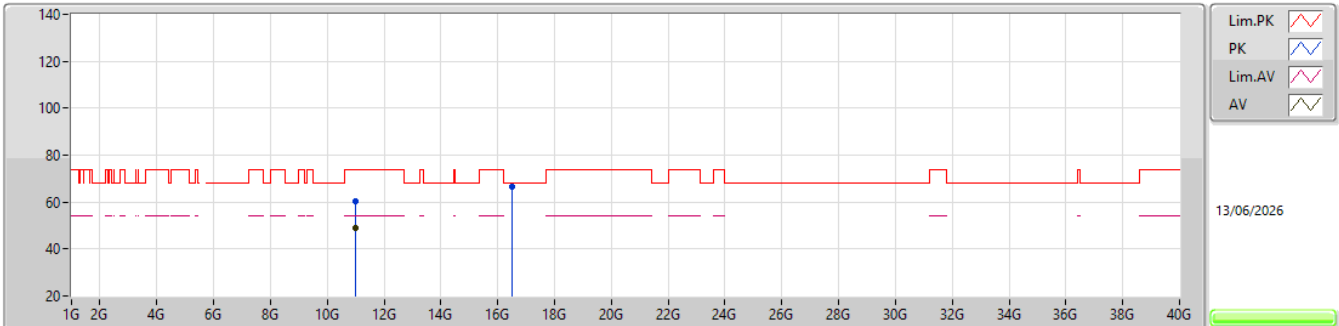


EUT_Y_1TX
Setting 18.5
03-Y-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.99556G	60.52	74.00	-13.48	77.71	3	Horizontal	184	1.65	-	38.41	10.58	66.18			
AV	10.99544G	49.02	54.00	-4.98	66.21	3	Horizontal	184	1.65	-	38.41	10.58	66.18			
PK	16.49277G	66.49	68.20	-1.71	79.16	3	Horizontal	128	2.49	-	38.21	12.61	63.49			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5500MHz_TX

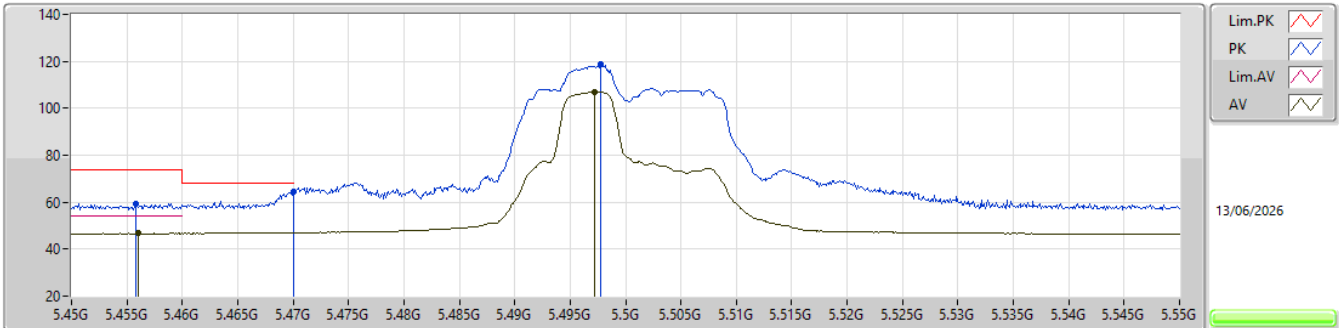


EUT_Y_1TX
Setting 18.5
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4558G	59.50	74.00	-14.50	52.43	3	Vertical	216	1.86	-	34.70	7.24	34.87			
AV	5.456G	46.76	54.00	-7.24	39.69	3	Vertical	216	1.86	-	34.70	7.24	34.87			
PK	5.47G	64.54	68.20	-3.66	57.46	3	Vertical	216	1.86	-	34.70	7.25	34.87			
PK	5.4978G	118.71	Inf	-Inf	111.60	3	Vertical	216	1.86	-	34.70	7.27	34.86			
AV	5.4972G	106.89	Inf	-Inf	99.78	3	Vertical	216	1.86	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5500MHz_TX

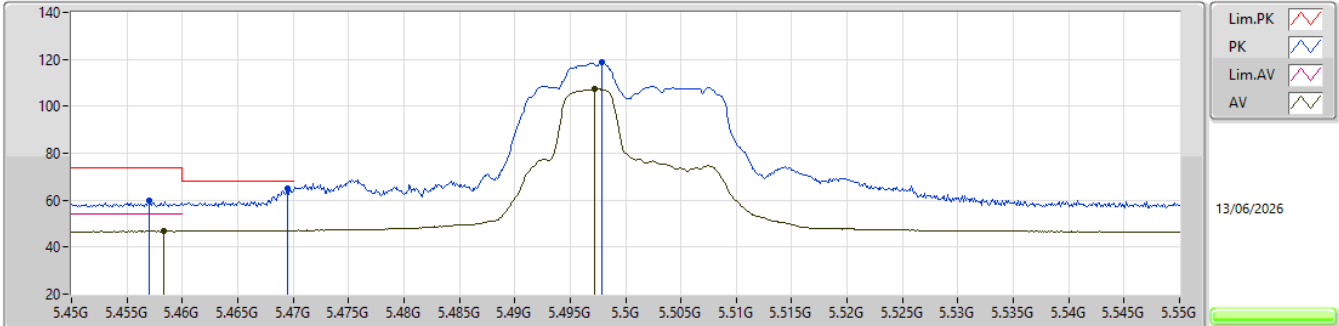


EUT_Y_1TX
Setting 18.5
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.457G	59.60	74.00	-14.40	52.53	3	Horizontal	139	1.92	-	34.70	7.24	34.87			
AV	5.4583G	46.77	54.00	-7.23	39.70	3	Horizontal	139	1.92	-	34.70	7.24	34.87			
PK	5.4695G	65.13	68.20	-3.07	58.05	3	Horizontal	139	1.92	-	34.70	7.25	34.87			
PK	5.4979G	118.85	Inf	-Inf	111.74	3	Horizontal	139	1.92	-	34.70	7.27	34.86			
AV	5.4972G	107.24	Inf	-Inf	100.13	3	Horizontal	139	1.92	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5500MHz_TX

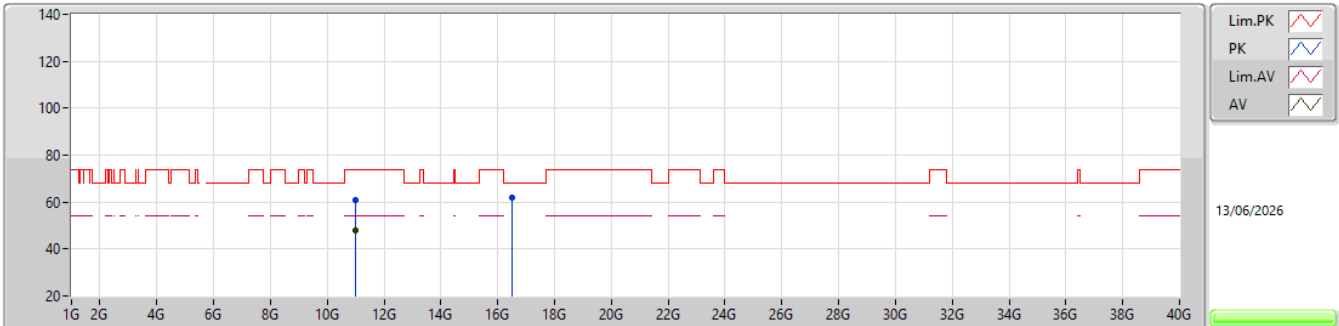EUT_Y_1TX
Setting 18.5
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99558G	60.70	74.00	-13.30	77.89	3	Vertical	168	1.80	-	38.41	10.58	66.18			
AV	10.99363G	47.86	54.00	-6.14	65.06	3	Vertical	168	1.80	-	38.41	10.58	66.19			
PK	16.49349G	62.01	68.20	-6.19	74.68	3	Vertical	150	1.79	-	38.21	12.61	63.49			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5500MHz_TX

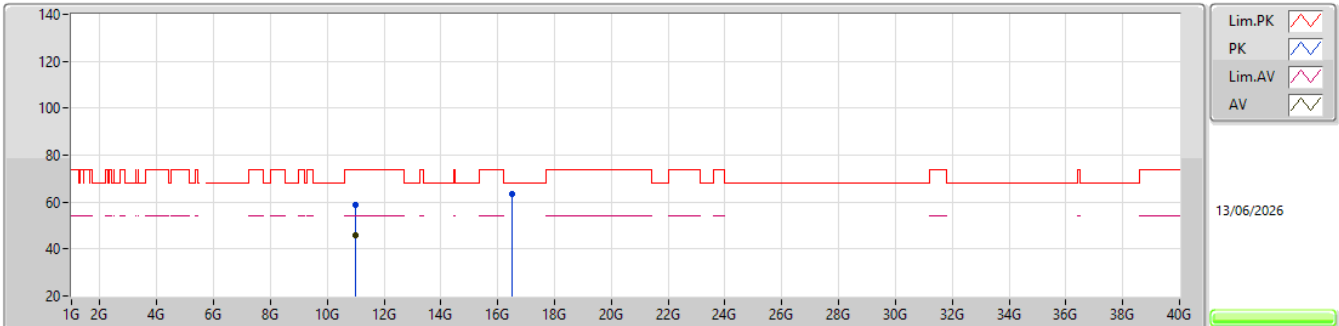EUT_Y_1TX
Setting 18.5
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99596G	58.78	74.00	-15.22	75.97	3	Horizontal	183	1.64	-	38.41	10.58	66.18			
AV	10.99352G	45.92	54.00	-8.08	63.12	3	Horizontal	183	1.64	-	38.41	10.58	66.19			
PK	16.49362G	63.25	68.20	-4.95	75.92	3	Horizontal	124	2.50	-	38.21	12.61	63.49			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5500MHz_TX

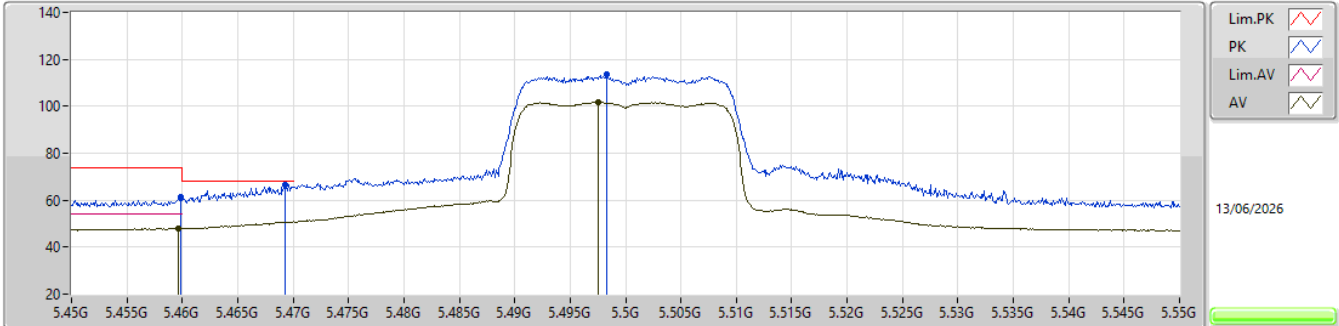


EUT_Y_1TX
Setting 18.5
03-Y-K-3-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4599G	61.46	74.00	-12.54	54.39	3	Vertical	219	2.67	-	34.70	7.24	34.87			
AV	5.4596G	47.97	54.00	-6.03	40.90	3	Vertical	219	2.67	-	34.70	7.24	34.87			
PK	5.4693G	66.50	68.20	-1.70	59.42	3	Vertical	219	2.67	-	34.70	7.25	34.87			
PK	5.4983G	113.51	Inf	-Inf	106.40	3	Vertical	219	2.67	-	34.70	7.27	34.86			
AV	5.4975G	101.77	Inf	-Inf	94.66	3	Vertical	219	2.67	-	34.70	7.27	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5500MHz_TX

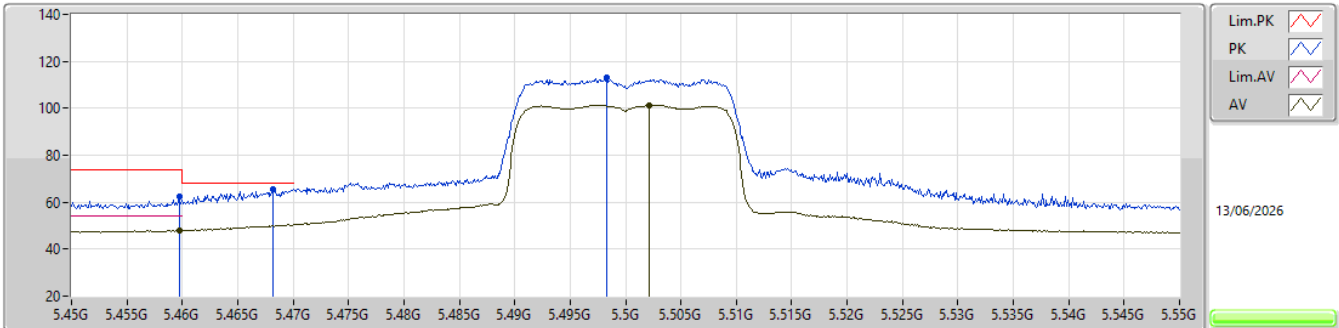


EUT_Y_1TX
Setting 18.5
03-Y-K-3-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4597G	62.27	74.00	-11.73	55.20	3	Horizontal	142	1.80	-	34.70	7.24	34.87			
AV	5.4597G	48.09	54.00	-5.91	41.02	3	Horizontal	142	1.80	-	34.70	7.24	34.87			
PK	5.4682G	65.61	68.20	-2.59	58.53	3	Horizontal	142	1.80	-	34.70	7.25	34.87			
PK	5.4983G	113.07	Inf	-Inf	105.96	3	Horizontal	142	1.80	-	34.70	7.27	34.86			
AV	5.5021G	101.25	Inf	-Inf	94.14	3	Horizontal	142	1.80	-	34.69	7.28	34.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5500MHz_TX

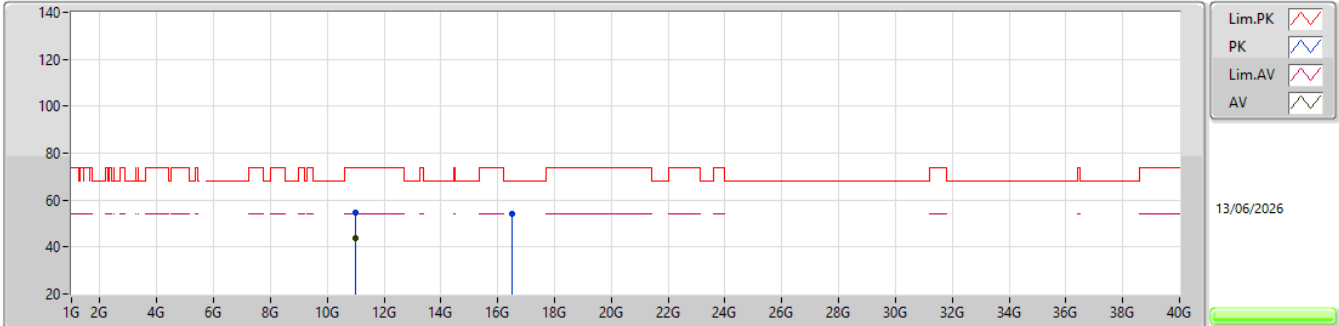


EUT_Y_1TX
Setting 18.5
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00065G	54.72	74.00	-19.28	71.91	3	Vertical	166	1.80	-	38.40	10.59	66.18			
AV	11.00025G	43.58	54.00	-10.42	60.77	3	Vertical	166	1.80	-	38.40	10.59	66.18			
PK	16.49395G	53.95	68.20	-14.25	66.62	3	Vertical	154	1.82	-	38.21	12.61	63.49			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5500MHz_TX

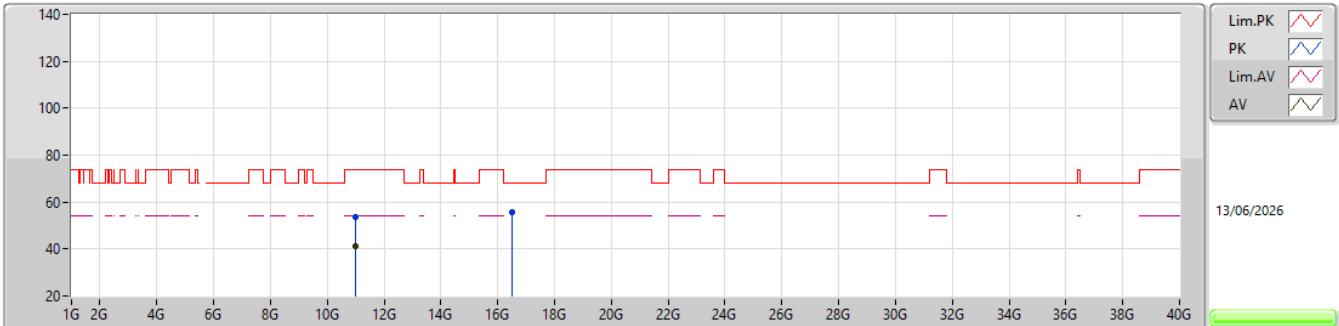EUT_Y_1TX
Setting 18.5
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.0003G	53.38	74.00	-20.62	70.57	3	Horizontal	184	1.60	-	38.40	10.59	66.18			
AV	10.9999G	41.17	54.00	-12.83	58.37	3	Horizontal	184	1.60	-	38.40	10.58	66.18			
PK	16.49155G	55.51	68.20	-12.69	68.17	3	Horizontal	121.5	2.50	-	38.22	12.61	63.49			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX


5600MHz_TX

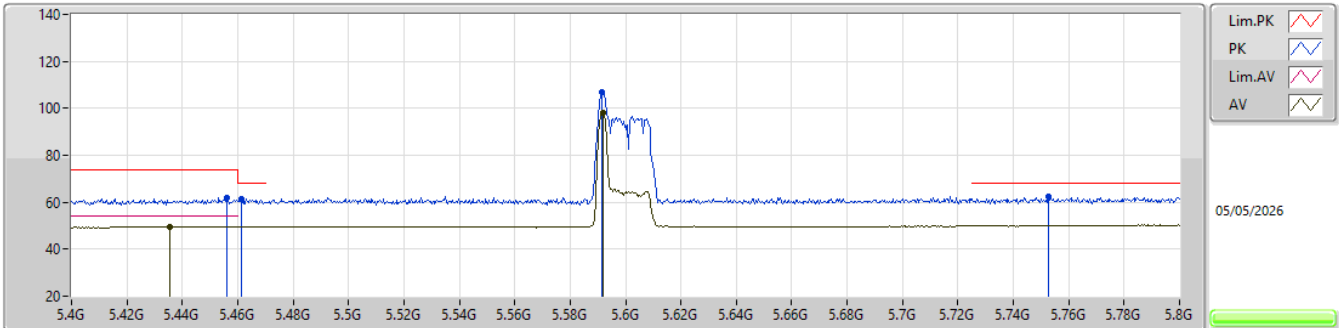EUT_Y_1TX
Setting 9.5
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.456G	62.06	74.00	-11.94	54.99	3	Vertical	30	2.11	-	34.70	7.24	34.87
AV	5.4356G	49.65	54.00	-4.35	42.59	3	Vertical	30	2.11	-	34.70	7.23	34.87
PK	5.4612G	61.32	68.20	-6.88	54.24	3	Vertical	30	2.11	-	34.70	7.25	34.87
PK	5.5916G	106.94	Inf	-Inf	99.91	3	Vertical	30	2.11	-	34.58	7.34	34.89
AV	5.592G	98.00	Inf	-Inf	90.97	3	Vertical	30	2.11	-	34.58	7.34	34.89
PK	5.7528G	62.18	68.20	-6.02	55.36	3	Vertical	30	2.11	-	34.29	7.47	34.94

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5600MHz_TX

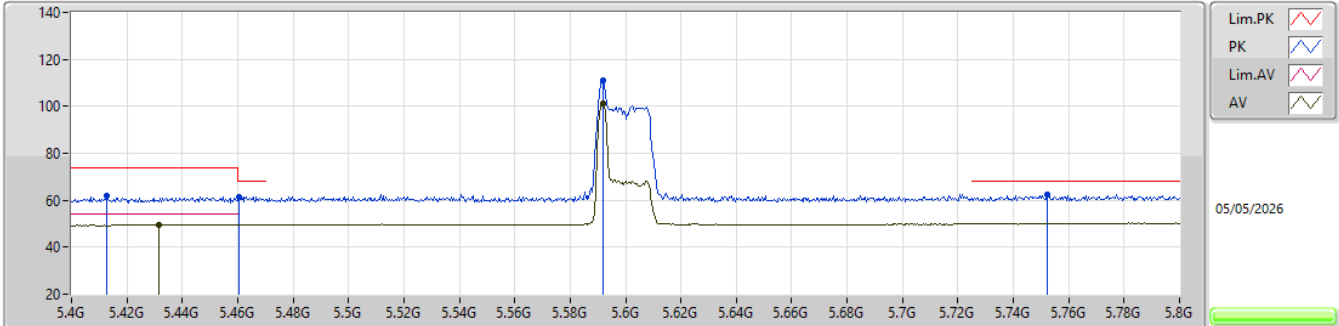


EUT Y_1TX
Setting 9.5
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4128G	61.81	74.00	-12.19	54.78	3	Horizontal	184	1.80	-	34.70	7.21	34.88			
AV	5.4316G	49.61	54.00	-4.39	42.56	3	Horizontal	184	1.80	-	34.70	7.22	34.87			
PK	5.4604G	61.37	68.20	-6.83	54.29	3	Horizontal	184	1.80	-	34.70	7.25	34.87			
PK	5.592G	111.05	Inf	-Inf	104.02	3	Horizontal	184	1.80	-	34.58	7.34	34.89			
AV	5.592G	101.31	Inf	-Inf	94.28	3	Horizontal	184	1.80	-	34.58	7.34	34.89			
PK	5.7524G	62.30	68.20	-5.90	55.47	3	Horizontal	184	1.80	-	34.30	7.47	34.94			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5600MHz_TX

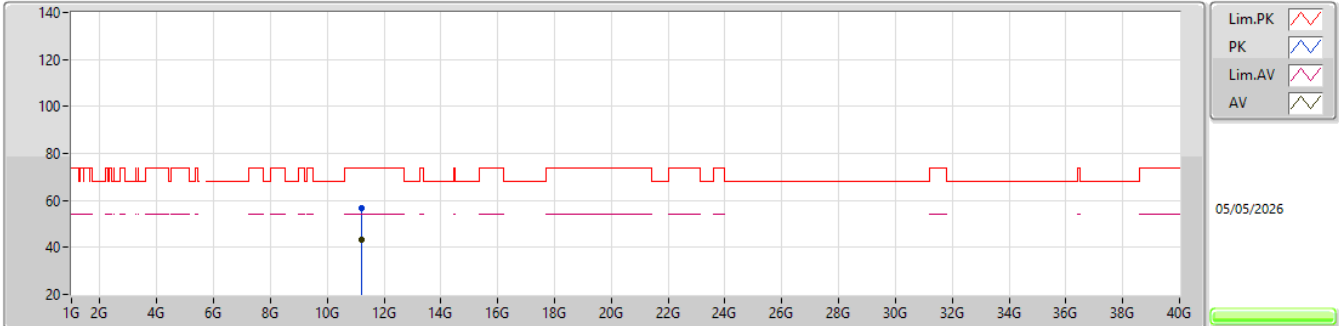


EUT_V_1TX
Setting 9.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.20044G	56.80	74.00	-17.20	42.58	3	Vertical	95	1.10	-	38.60	10.65	35.03			
AV	11.19962G	43.46	54.00	-10.54	29.24	3	Vertical	95	1.10	-	38.60	10.65	35.03			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX


5600MHz_TX

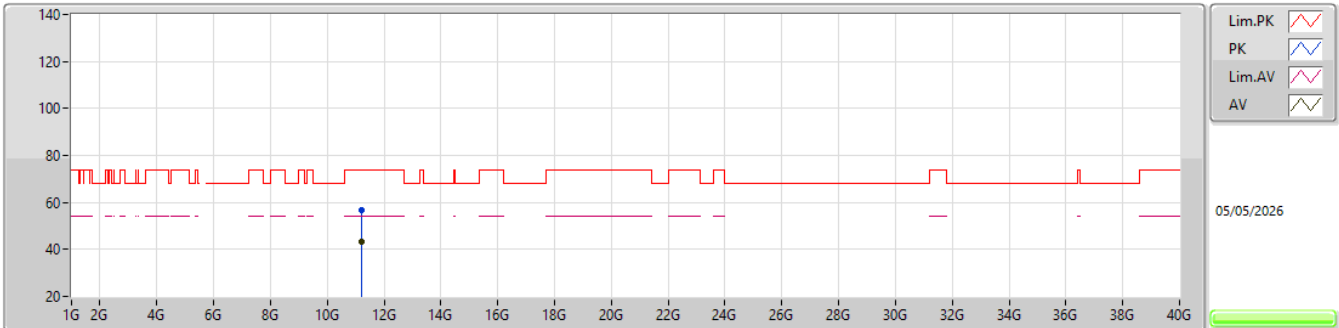EUT_V_1TX
Setting 9.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.20026G	56.60	74.00	-17.40	42.38	3	Horizontal	234	1.27	-	38.60	10.65	35.03			
AV	11.19951G	43.46	54.00	-10.54	29.24	3	Horizontal	234	1.27	-	38.60	10.65	35.03			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5600MHz_TX

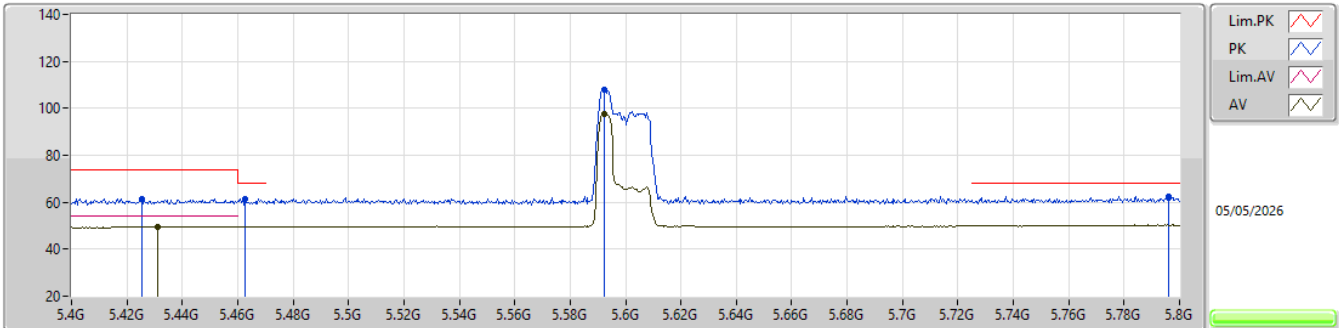


EUT_Y_1TX
Setting 12
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4256G	61.62	74.00	-12.38	54.57	3	Vertical	26	1.80	-	34.70	7.22	34.87			
AV	5.4312G	49.60	54.00	-4.40	42.55	3	Vertical	26	1.80	-	34.70	7.22	34.87			
PK	5.4628G	61.61	68.20	-6.59	54.53	3	Vertical	26	1.80	-	34.70	7.25	34.87			
PK	5.5924G	108.01	Inf	-Inf	100.98	3	Vertical	26	1.80	-	34.58	7.34	34.89			
AV	5.5924G	97.53	Inf	-Inf	90.50	3	Vertical	26	1.80	-	34.58	7.34	34.89			
PK	5.796G	62.30	68.20	-5.90	55.53	3	Vertical	26	1.80	-	34.21	7.51	34.95			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5600MHz_TX

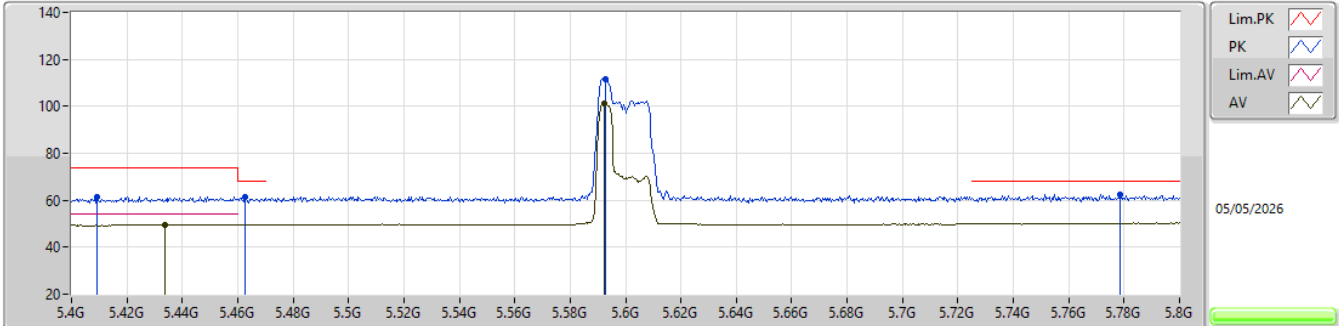


EUT_Y_1TX
Setting 12
03-R-C-6-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4092G	61.41	74.00	-12.59	54.38	3	Horizontal	184	1.80	-	34.70	7.21	34.88
AV	5.4336G	49.63	54.00	-4.37	42.57	3	Horizontal	184	1.80	-	34.70	7.23	34.87
PK	5.4628G	61.15	68.20	-7.05	54.07	3	Horizontal	184	1.80	-	34.70	7.25	34.87
PK	5.5928G	111.51	Inf	-Inf	104.47	3	Horizontal	184	1.80	-	34.59	7.34	34.89
AV	5.5924G	101.06	Inf	-Inf	94.03	3	Horizontal	184	1.80	-	34.58	7.34	34.89
PK	5.7784G	62.41	68.20	-5.79	55.62	3	Horizontal	184	1.80	-	34.24	7.49	34.94

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5600MHz_TX

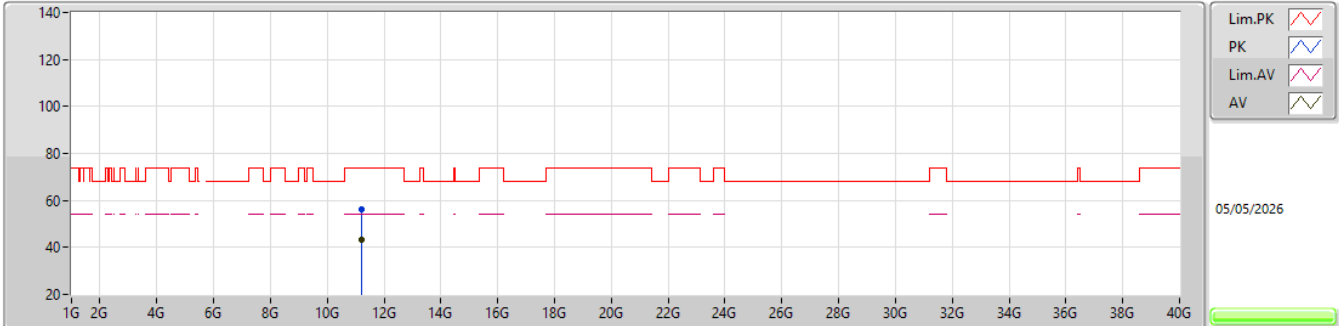


EUT_V_1TX
Setting 12
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.19963G	56.32	74.00	-17.68	42.10	3	Vertical	350	1.63	-	38.60	10.65	35.03			
AV	11.19888G	43.53	54.00	-10.47	29.31	3	Vertical	350	1.63	-	38.60	10.65	35.03			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX


5600MHz_TX

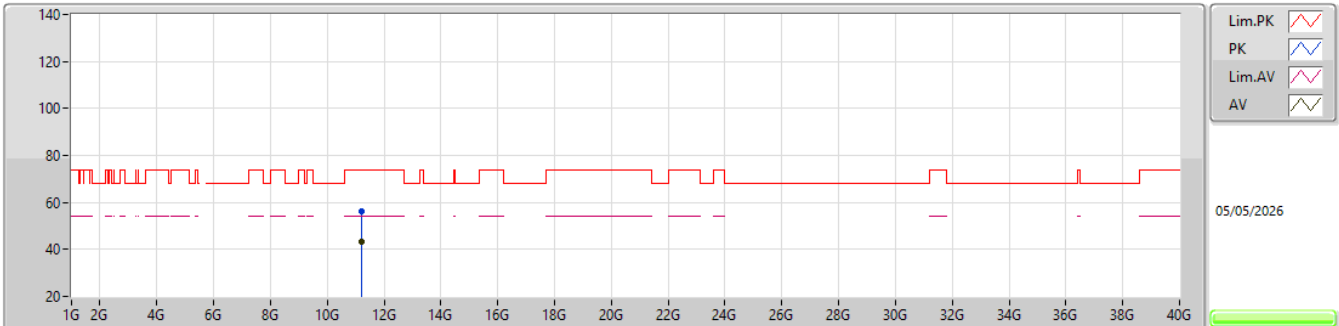EUT_Y_1TX
Setting 12
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.19937G	56.26	74.00	-17.74	42.04	3	Horizontal	325	1.89	-	38.60	10.65	35.03			
AV	11.19948G	43.46	54.00	-10.54	29.24	3	Horizontal	325	1.89	-	38.60	10.65	35.03			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5600MHz_TX

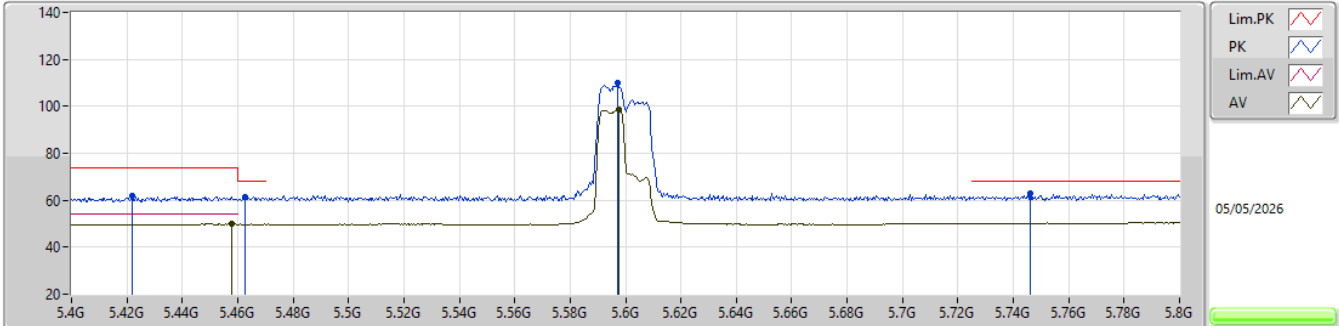


EUT_Y_1TX
Setting 15.5
03-D-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.422G	62.00	74.00	-12.00	54.96	3	Vertical	27	2.22	-	34.70	7.22	34.88			
PK	5.4628G	61.61	68.20	-6.59	54.53	3	Vertical	27	2.22	-	34.70	7.25	34.87			
AV	5.458G	49.80	54.00	-4.20	42.73	3	Vertical	27	2.22	-	34.70	7.24	34.87			
PK	5.5972G	110.02	Inf	-Inf	102.97	3	Vertical	27	2.22	-	34.59	7.35	34.89			
AV	5.5976G	98.40	Inf	-Inf	91.34	3	Vertical	27	2.22	-	34.60	7.35	34.89			
PK	5.746G	62.75	68.20	-5.45	55.91	3	Vertical	27	2.22	-	34.30	7.47	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX


5600MHz_TX

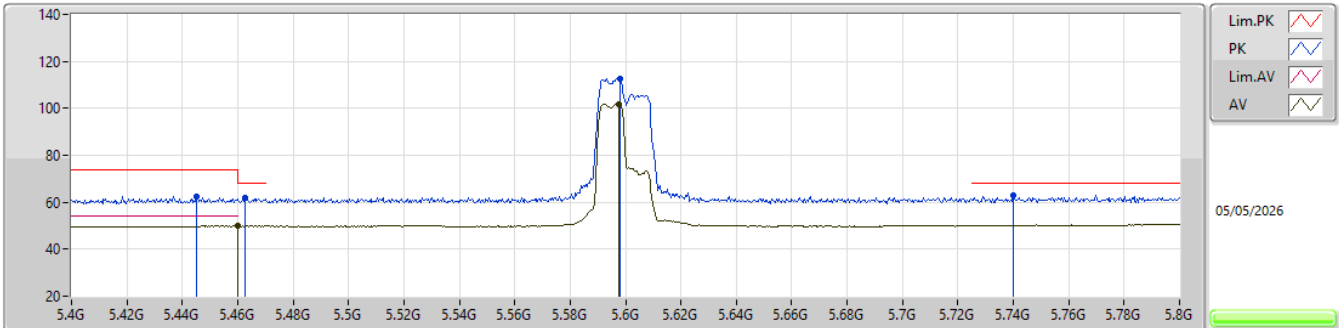EUT_Y_1TX
Setting 15.5
03-D-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4452G	62.51	74.00	-11.49	55.45	3	Horizontal	183	1.80	-	34.70	7.23	34.87			
PK	5.4628G	61.72	68.20	-6.48	54.64	3	Horizontal	183	1.80	-	34.70	7.25	34.87			
AV	5.46G	49.81	54.00	-4.19	42.73	3	Horizontal	183	1.80	-	34.70	7.25	34.87			
PK	5.598G	112.63	Inf	-Inf	105.57	3	Horizontal	183	1.80	-	34.60	7.35	34.89			
AV	5.5976G	101.83	Inf	-Inf	94.77	3	Horizontal	183	1.80	-	34.60	7.35	34.89			
PK	5.74G	63.06	68.20	-5.14	56.23	3	Horizontal	183	1.80	-	34.30	7.46	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5600MHz_TX

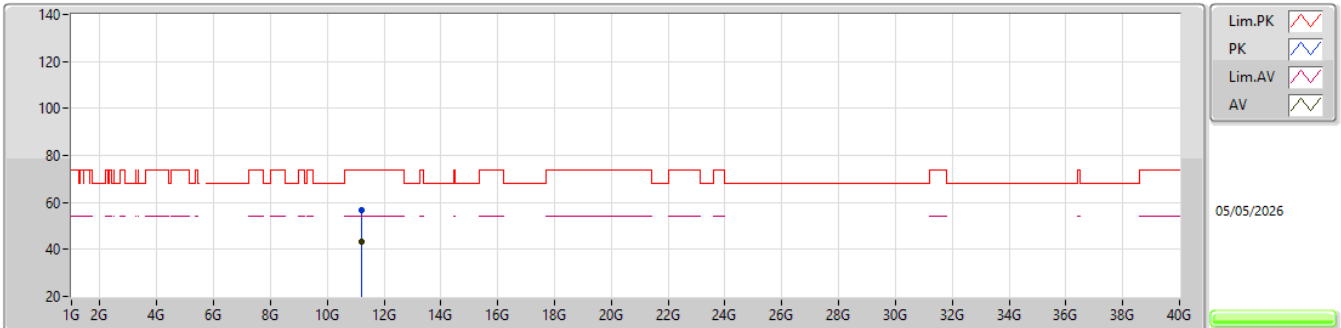


EUT_V_1TX
Setting 15.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.19926G	56.52	74.00	-17.48	42.30	3	Vertical	75	2.97	-	38.60	10.65	35.03			
AV	11.19943G	43.46	54.00	-10.54	29.24	3	Vertical	75	2.97	-	38.60	10.65	35.03			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5600MHz_TX

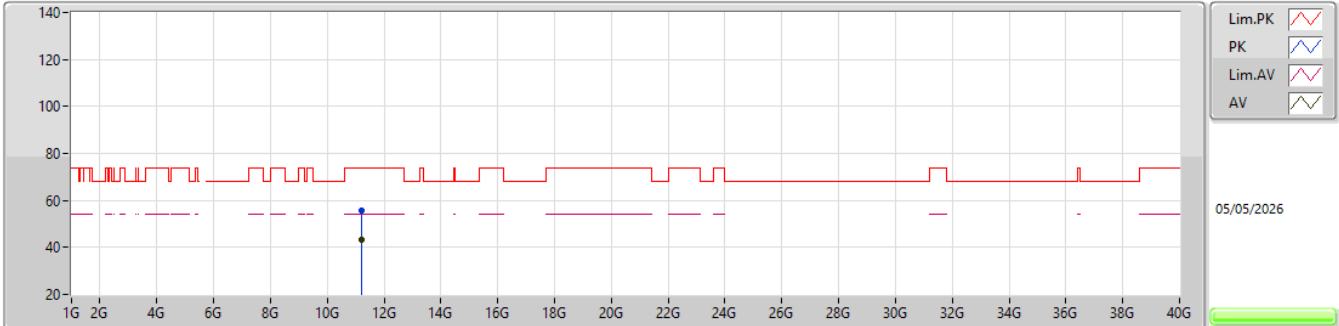


EUT_V_1TX
Setting 15.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.20055G	55.93	74.00	-18.07	41.71	3	Horizontal	39	1.90	-	38.60	10.65	35.03			
AV	11.19942G	43.46	54.00	-10.54	29.24	3	Horizontal	39	1.90	-	38.60	10.65	35.03			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5600MHz_TX

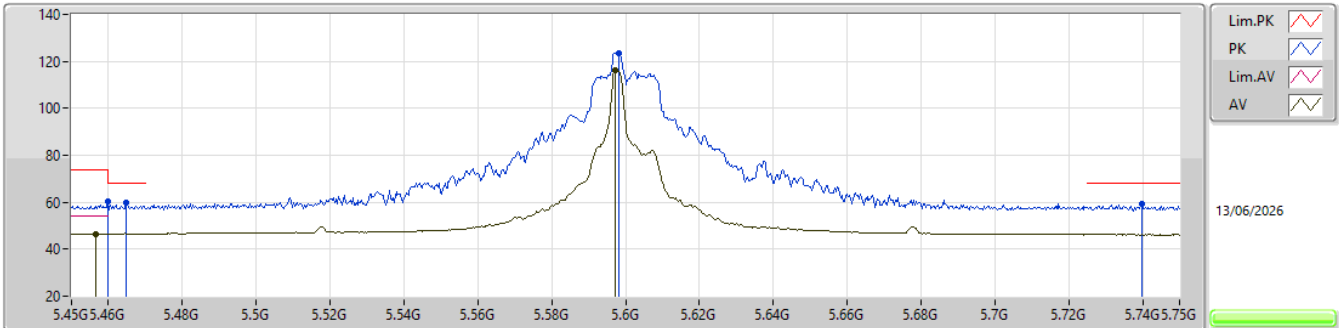EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4599G	60.44	74.00	-13.56	53.37	3	Vertical	217	2.64	-	34.70	7.24	34.87			
AV	5.4566G	46.55	54.00	-7.45	39.48	3	Vertical	217	2.64	-	34.70	7.24	34.87			
PK	5.4647G	59.84	68.20	-8.36	52.76	3	Vertical	217	2.64	-	34.70	7.25	34.87			
PK	5.5982G	123.47	Inf	-Inf	116.41	3	Vertical	217	2.64	-	34.60	7.35	34.89			
AV	5.5973G	116.05	Inf	-Inf	109.00	3	Vertical	217	2.64	-	34.59	7.35	34.89			
PK	5.7398G	59.20	68.20	-9.00	52.37	3	Vertical	217	2.64	-	34.30	7.46	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5600MHz_TX

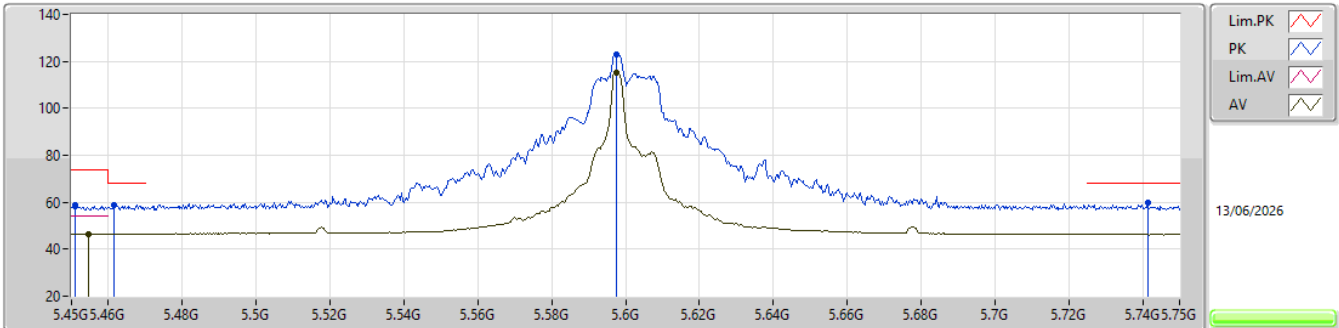


EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4509G	58.60	74.00	-15.40	51.53	3	Horizontal	163	1.80	-	34.70	7.24	34.87
AV	5.4545G	46.47	54.00	-7.53	39.40	3	Horizontal	163	1.80	-	34.70	7.24	34.87
PK	5.4614G	58.73	68.20	-9.47	51.65	3	Horizontal	163	1.80	-	34.70	7.25	34.87
PK	5.5976G	122.77	Inf	-Inf	115.71	3	Horizontal	163	1.80	-	34.60	7.35	34.89
AV	5.5976G	115.29	Inf	-Inf	108.23	3	Horizontal	163	1.80	-	34.60	7.35	34.89
PK	5.7413G	59.98	68.20	-8.22	53.15	3	Horizontal	163	1.80	-	34.30	7.46	34.93

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5600MHz_TX

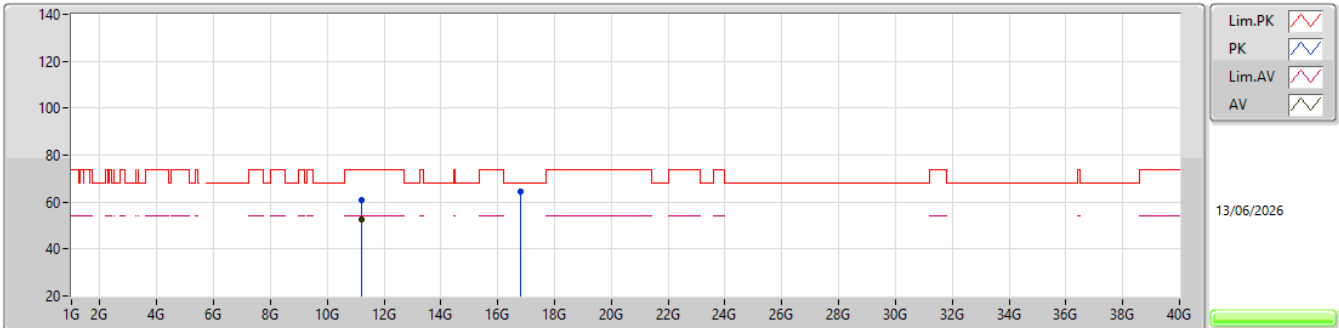EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.19619G	61.07	74.00	-12.93	78.06	3	Vertical	165	1.80	-	38.60	10.65	66.24			
AV	11.19532G	52.35	54.00	-1.65	69.34	3	Vertical	165	1.80	-	38.60	10.65	66.24			
PK	16.79328G	64.74	68.20	-3.46	76.27	3	Vertical	151.3	1.82	-	39.29	12.75	63.57			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5600MHz_TX

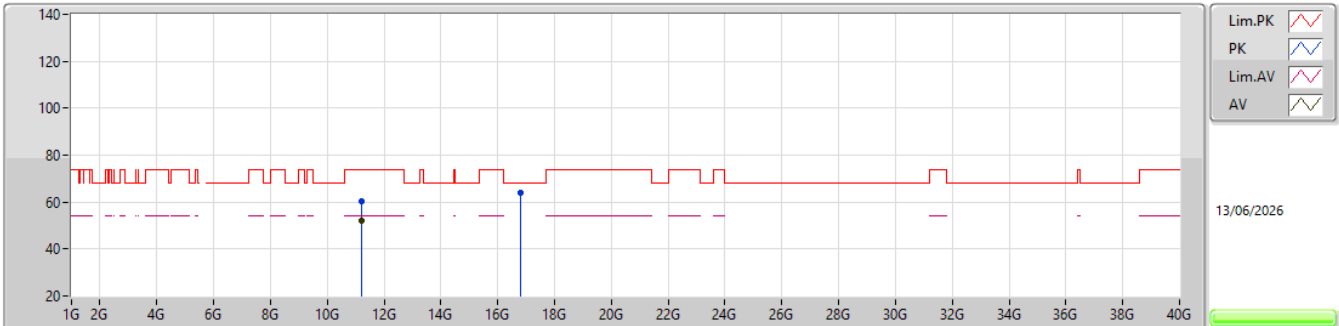EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.1949G	60.35	74.00	-13.65	77.34	3	Horizontal	188	1.80	-	38.60	10.65	66.24			
AV	11.19535G	52.19	54.00	-1.81	69.18	3	Horizontal	188	1.80	-	38.60	10.65	66.24			
PK	16.79367G	64.21	68.20	-3.99	75.74	3	Horizontal	221	1.89	-	39.29	12.75	63.57			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5600MHz_TX

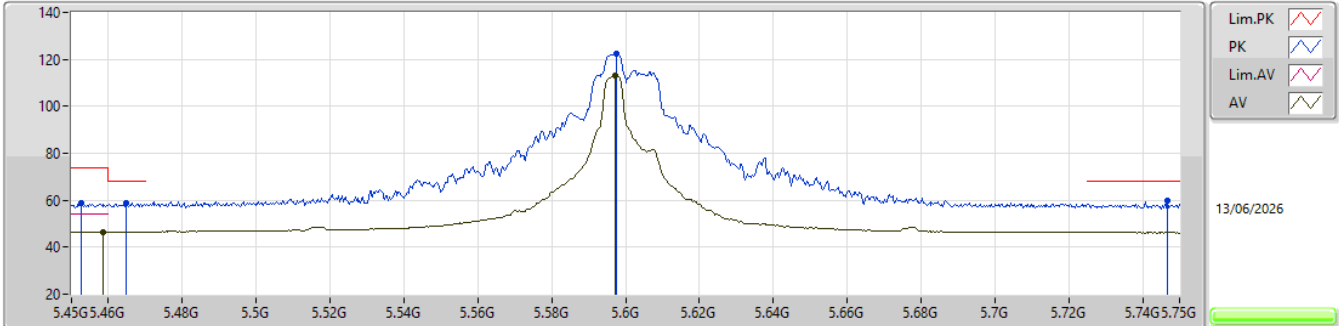


EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4527G	58.99	74.00	-15.01	51.92	3	Vertical	216	2.64	-	34.70	7.24	34.87			
AV	5.4587G	46.53	54.00	-7.47	39.46	3	Vertical	216	2.64	-	34.70	7.24	34.87			
PK	5.4647G	58.99	68.20	-9.21	51.91	3	Vertical	216	2.64	-	34.70	7.25	34.87			
PK	5.5976G	122.24	Inf	-Inf	115.18	3	Vertical	216	2.64	-	34.60	7.35	34.89			
AV	5.5973G	112.97	Inf	-Inf	105.92	3	Vertical	216	2.64	-	34.59	7.35	34.89			
PK	5.7467G	59.76	68.20	-8.44	52.92	3	Vertical	216	2.64	-	34.30	7.47	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5600MHz_TX

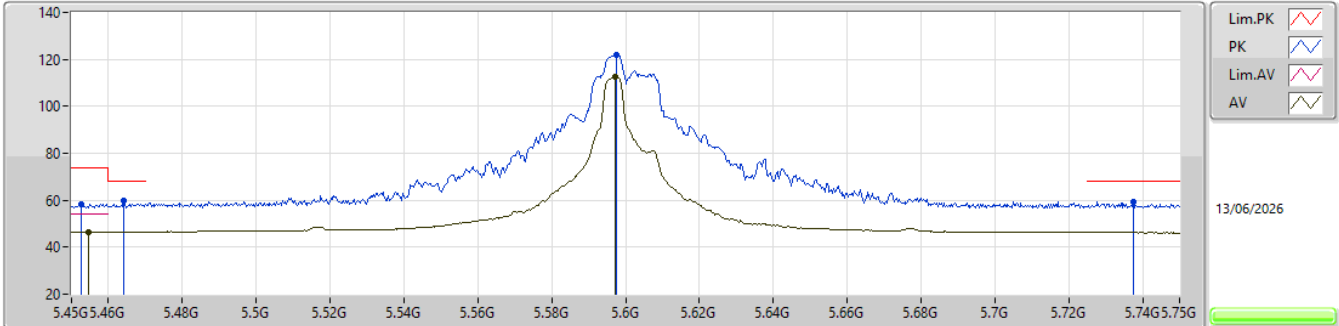


EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4527G	58.28	74.00	-15.72	51.21	3	Horizontal	161	1.80	-	34.70	7.24	34.87
AV	5.4545G	46.43	54.00	-7.57	39.36	3	Horizontal	161	1.80	-	34.70	7.24	34.87
PK	5.4641G	59.64	68.20	-8.56	52.56	3	Horizontal	161	1.80	-	34.70	7.25	34.87
PK	5.5976G	122.00	Inf	-Inf	114.94	3	Horizontal	161	1.80	-	34.60	7.35	34.89
AV	5.5973G	112.52	Inf	-Inf	105.47	3	Horizontal	161	1.80	-	34.59	7.35	34.89
PK	5.7374G	59.24	68.20	-8.96	52.41	3	Horizontal	161	1.80	-	34.30	7.46	34.93

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5600MHz_TX

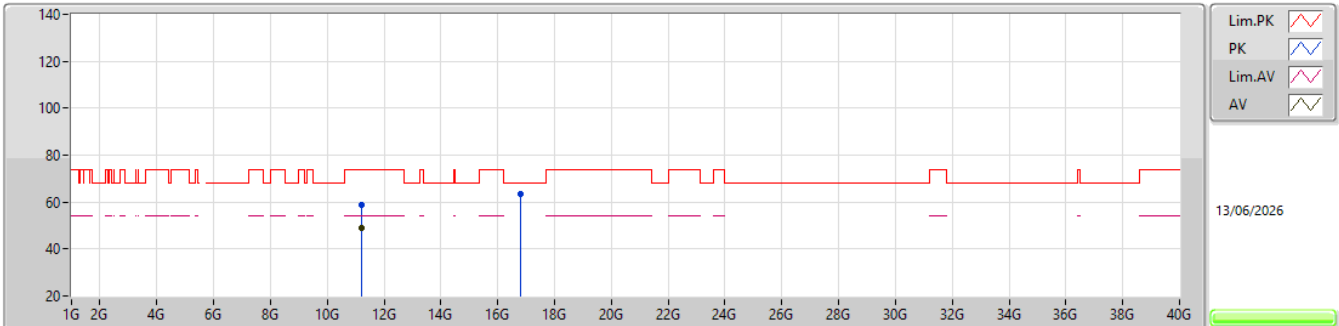EUT_Y_1TX
Setting 28
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.19515G	58.90	74.00	-15.10	75.89	3	Vertical	175	2.08	-	38.60	10.65	66.24			
AV	11.1939G	49.08	54.00	-4.92	66.07	3	Vertical	175	2.08	-	38.60	10.65	66.24			
PK	16.789G	63.63	68.20	-4.57	75.18	3	Vertical	144	1.63	-	39.28	12.74	63.57			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5600MHz_TX

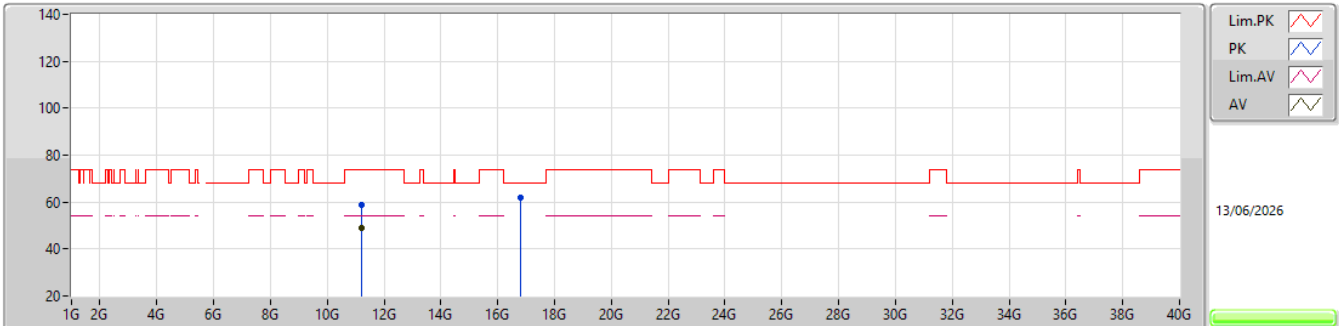EUT_Y_1TX
Setting 28
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.19415G	58.79	74.00	-15.21	75.78	3	Horizontal	187	1.59	-	38.60	10.65	66.24			
AV	11.1937G	49.09	54.00	-4.91	66.08	3	Horizontal	187	1.59	-	38.60	10.65	66.24			
PK	16.79017G	62.15	68.20	-6.05	73.70	3	Horizontal	221	1.91	-	39.28	12.74	63.57			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5600MHz_TX

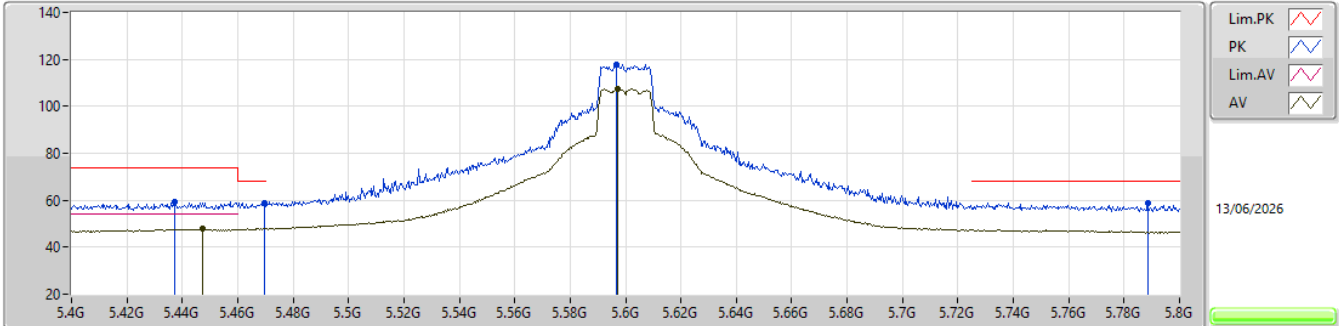


EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4372G	59.36	74.00	-14.64	52.30	3	Vertical	217	2.65	-	34.70	7.23	34.87			
AV	5.4472G	47.69	54.00	-6.31	40.62	3	Vertical	217	2.65	-	34.70	7.24	34.87			
PK	5.4696G	58.72	68.20	-9.48	51.64	3	Vertical	217	2.65	-	34.70	7.25	34.87			
PK	5.5968G	117.87	Inf	-Inf	110.82	3	Vertical	217	2.65	-	34.59	7.35	34.89			
AV	5.5972G	107.41	Inf	-Inf	100.36	3	Vertical	217	2.65	-	34.59	7.35	34.89			
PK	5.7884G	58.91	68.20	-9.29	52.14	3	Vertical	217	2.65	-	34.22	7.50	34.95			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5600MHz_TX

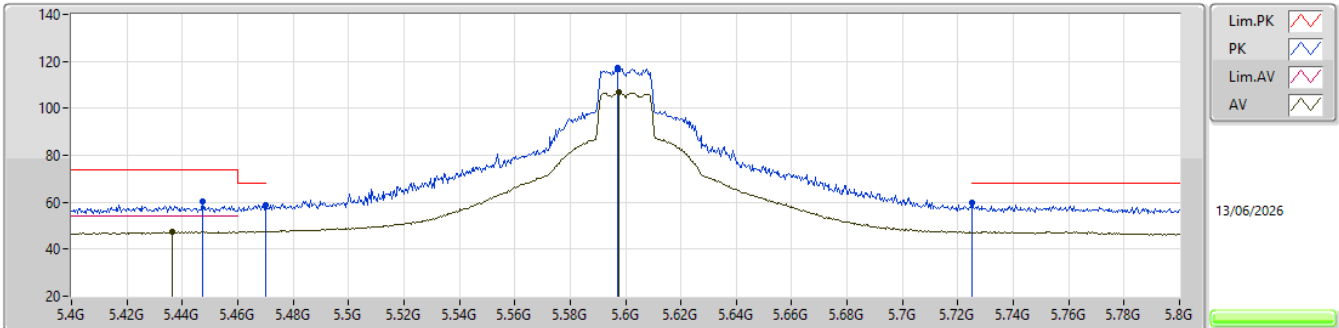


EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4472G	60.11	74.00	-13.89	53.04	3	Horizontal	153.9	1.80	-	34.70	7.24	34.87
AV	5.4364G	47.47	54.00	-6.53	40.41	3	Horizontal	153.9	1.80	-	34.70	7.23	34.87
PK	5.47G	59.04	68.20	-9.16	51.96	3	Horizontal	153.9	1.80	-	34.70	7.25	34.87
PK	5.5972G	117.27	Inf	-Inf	110.22	3	Horizontal	153.9	1.80	-	34.59	7.35	34.89
AV	5.5976G	106.70	Inf	-Inf	99.64	3	Horizontal	153.9	1.80	-	34.60	7.35	34.89
PK	5.7252G	59.70	68.20	-8.50	52.88	3	Horizontal	153.9	1.80	-	34.30	7.45	34.93

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5600MHz_TX

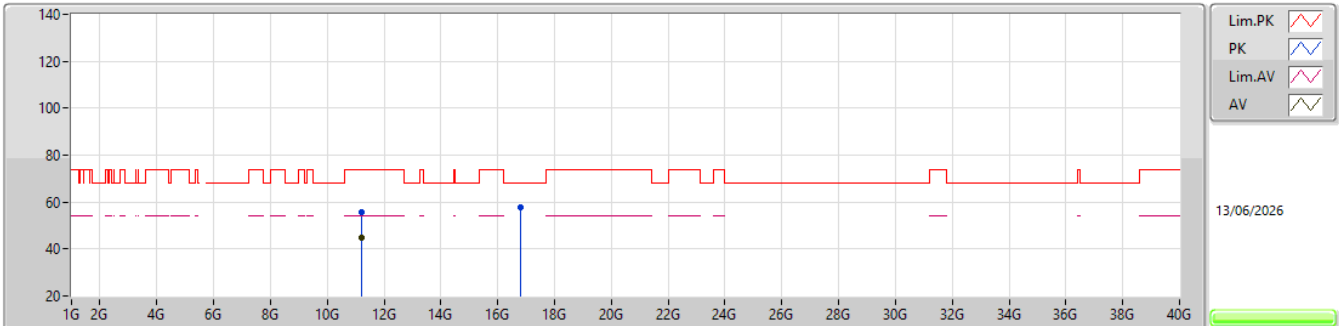EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.1991G	55.83	74.00	-18.17	72.82	3	Vertical	168	2.06	-	38.60	10.65	66.24			
AV	11.20035G	44.88	54.00	-9.12	61.87	3	Vertical	168	2.06	-	38.60	10.65	66.24			
PK	16.79385G	57.74	68.20	-10.46	69.27	3	Vertical	150	1.69	-	39.29	12.75	63.57			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5600MHz_TX

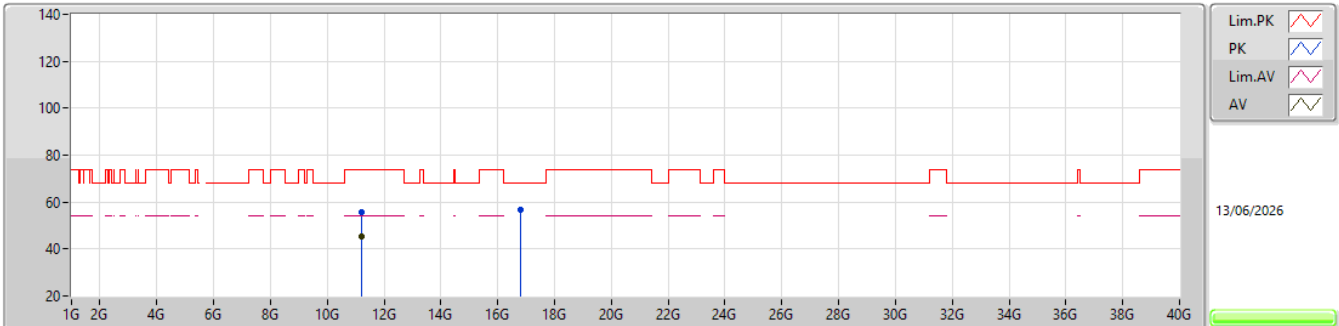EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.19915G	55.93	74.00	-18.07	72.92	3	Horizontal	184	1.75	-	38.60	10.65	66.24			
AV	11.2G	45.30	54.00	-8.70	62.29	3	Horizontal	184	1.75	-	38.60	10.65	66.24			
PK	16.8029G	56.56	68.20	-11.64	68.07	3	Horizontal	218	1.90	-	39.31	12.75	63.57			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5700MHz_TX

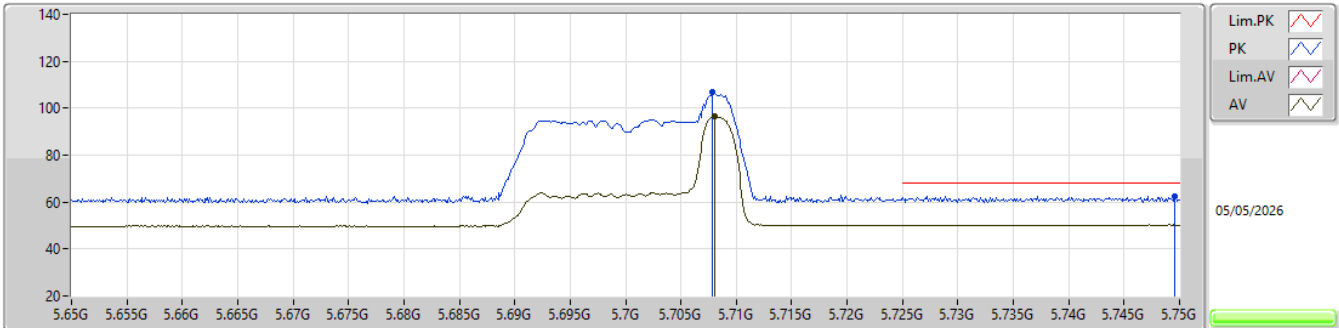


EUT_Y_1TX
Setting 8
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7078G	106.99	Inf	-Inf	100.17	3	Vertical	23	2.02	-	34.30	7.44	34.92			
AV	5.708G	96.45	Inf	-Inf	89.63	3	Vertical	23	2.02	-	34.30	7.44	34.92			
PK	5.7496G	62.62	68.20	-5.58	55.78	3	Vertical	23	2.02	-	34.30	7.47	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5700MHz_TX

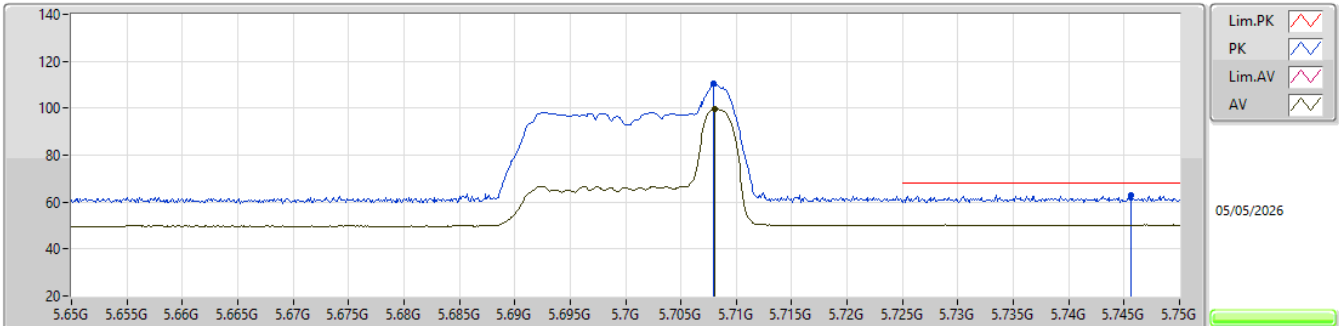


EUT_Y_1TX
Setting 8
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7079G	110.31	Inf	-Inf	103.49	3	Horizontal	181	1.80	-	34.30	7.44	34.92			
AV	5.708G	99.70	Inf	-Inf	92.88	3	Horizontal	181	1.80	-	34.30	7.44	34.92			
PK	5.7456G	63.02	68.20	-5.18	56.18	3	Horizontal	181	1.80	-	34.30	7.47	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5700MHz_TX

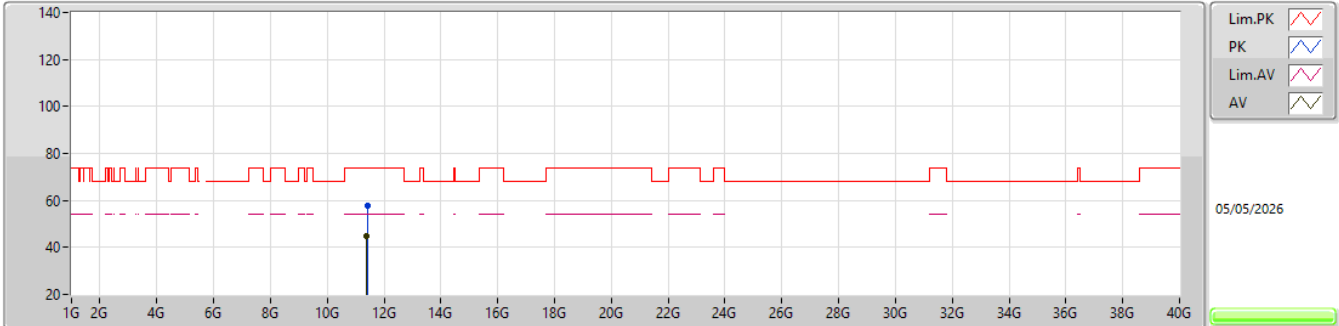


EUT_V_1TX
Setting 8
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.40197G	57.75	74.00	-16.25	43.21	3	Vertical	86	1.74	-	38.90	10.72	35.08			
AV	11.40001G	44.74	54.00	-9.26	30.20	3	Vertical	86	1.74	-	38.90	10.72	35.08			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX


5700MHz_TX

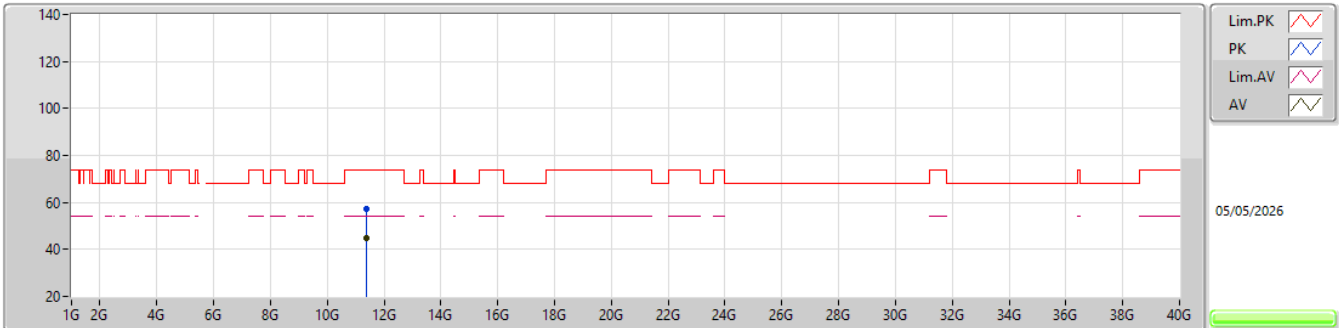EUT_V_1TX
Setting 8
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39859G	57.40	74.00	-16.60	42.87	3	Horizontal	14	1.31	-	38.90	10.71	35.08			
AV	11.4G	44.74	54.00	-9.26	30.20	3	Horizontal	14	1.31	-	38.90	10.72	35.08			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX


5700MHz_TX

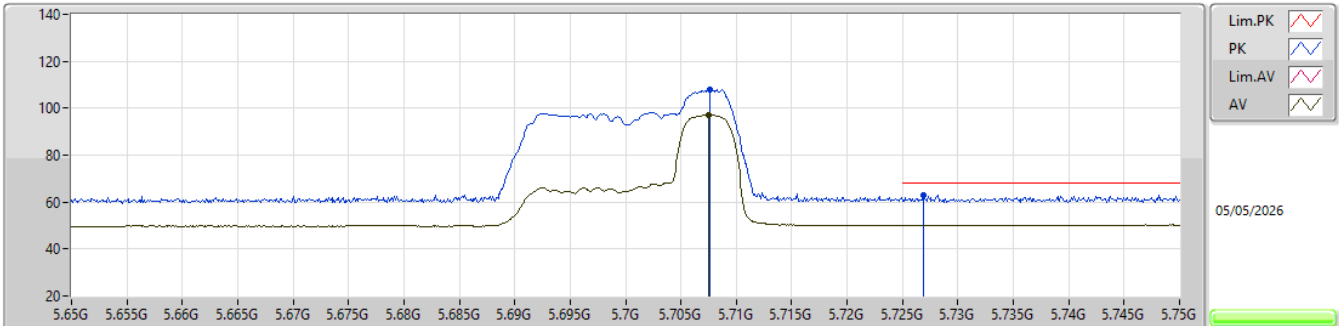EUT_Y_1TX
Setting 11
03-D-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7076G	108.07	Inf	-Inf	101.25	3	Vertical	26	1.99	-	34.30	7.44	34.92			
AV	5.7075G	97.11	Inf	-Inf	90.29	3	Vertical	26	1.99	-	34.30	7.44	34.92			
PK	5.7269G	63.03	68.20	-5.17	56.21	3	Vertical	26	1.99	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5700MHz_TX

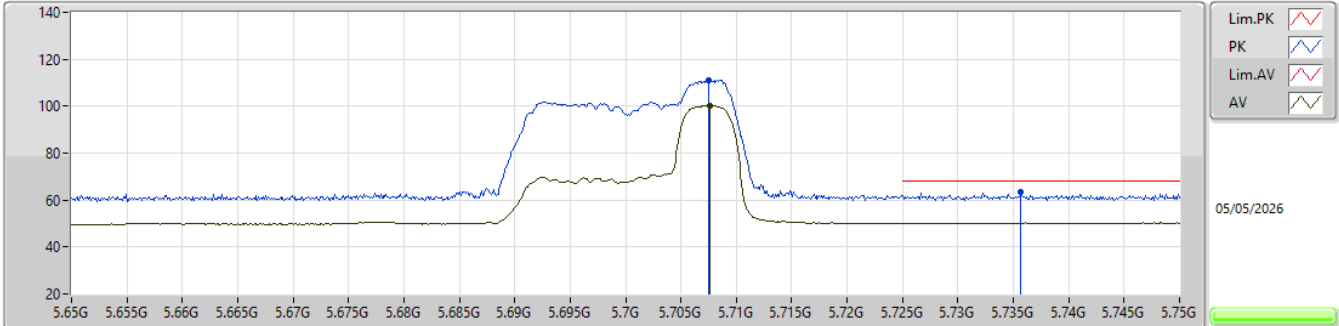


EUT_Y_1TX
Setting 11
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7075G	111.17	Inf	-Inf	104.35	3	Horizontal	184	1.79	-	34.30	7.44	34.92			
AV	5.7076G	100.30	Inf	-Inf	93.48	3	Horizontal	184	1.79	-	34.30	7.44	34.92			
PK	5.7357G	63.27	68.20	-4.93	56.44	3	Horizontal	184	1.79	-	34.30	7.46	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX


5700MHz_TX

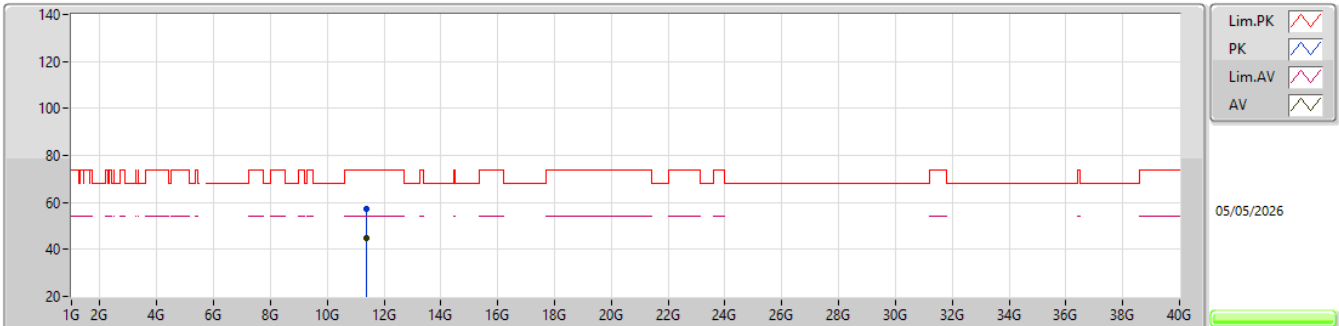EUT_Y_1TX
Setting 11
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40106G	57.36	74.00	-16.64	42.82	3	Vertical	202	2.91	-	38.90	10.72	35.08			
AV	11.40001G	44.74	54.00	-9.26	30.20	3	Vertical	202	2.91	-	38.90	10.72	35.08			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX


5700MHz_TX

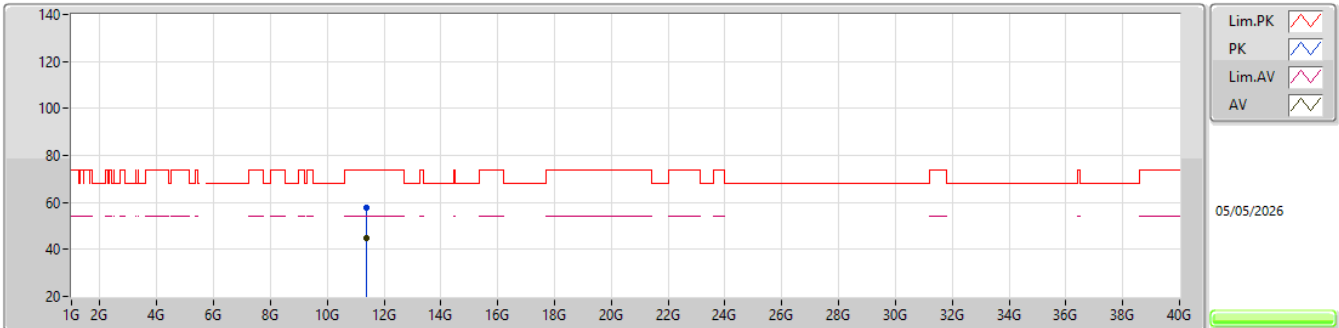EUT_Y_1TX
Setting 11
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.39834G	57.77	74.00	-16.23	43.24	3	Horizontal	229	1.50	-	38.90	10.71	35.08			
AV	11.40005G	44.74	54.00	-9.26	30.20	3	Horizontal	229	1.50	-	38.90	10.72	35.08			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5700MHz_TX

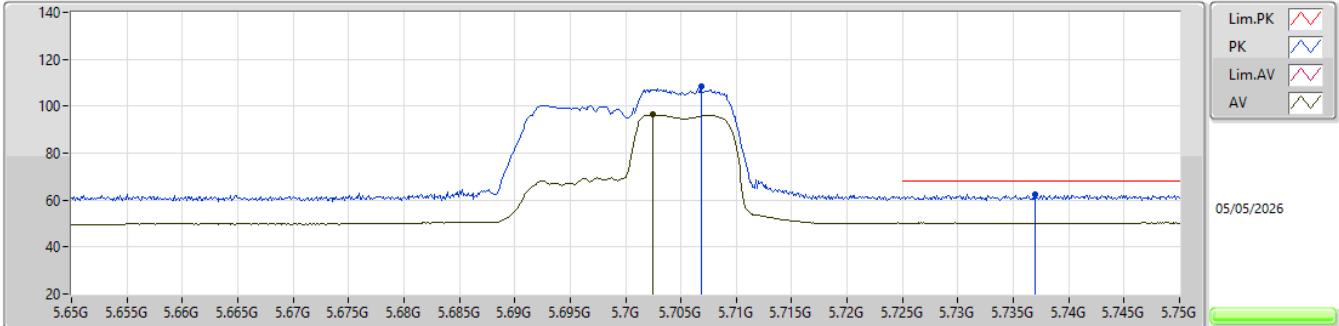


EUT_Y_1TX
Setting 13.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7068G	108.40	Inf	-Inf	101.58	3	Vertical	26	2.07	-	34.30	7.44	34.92			
AV	5.7025G	96.32	Inf	-Inf	89.51	3	Vertical	26	2.07	-	34.30	7.43	34.92			
PK	5.737G	62.66	68.20	-5.54	55.83	3	Vertical	26	2.07	-	34.30	7.46	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5700MHz_TX

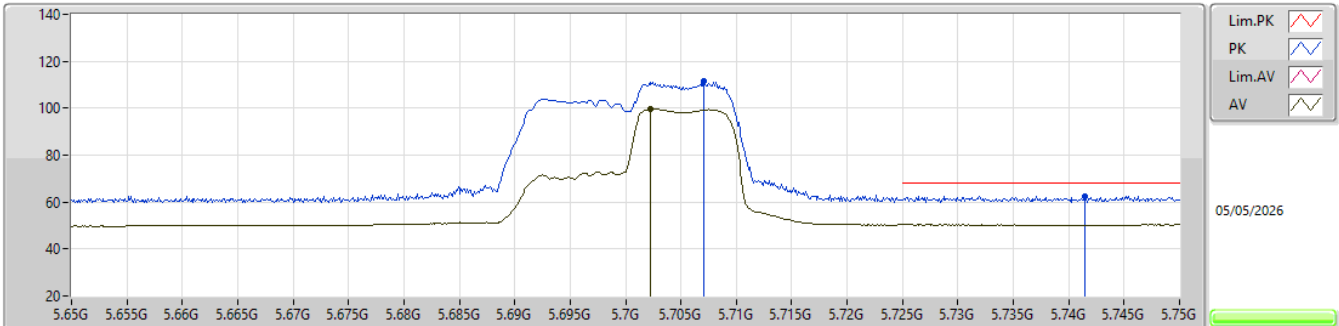


EUT_Y_1TX
Setting 13.5
03-D-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7071G	111.73	Inf	-Inf	104.91	3	Horizontal	183	1.80	-	34.30	7.44	34.92			
AV	5.7023G	99.56	Inf	-Inf	92.75	3	Horizontal	183	1.80	-	34.30	7.43	34.92			
PK	5.7415G	62.65	68.20	-5.55	55.82	3	Horizontal	183	1.80	-	34.30	7.46	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX


5700MHz_TX

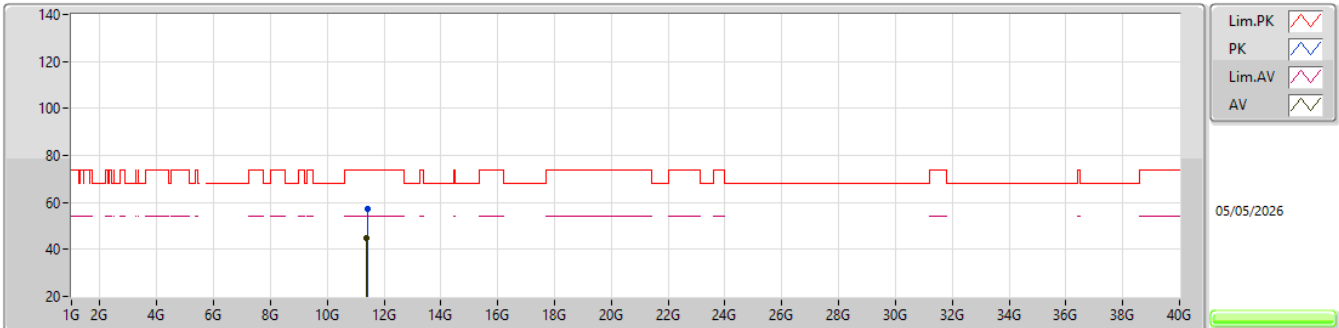EUT_V_1TX
Setting 13.5
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40182G	57.27	74.00	-16.73	42.73	3	Vertical	60	1.10	-	38.90	10.72	35.08			
AV	11.40011G	44.74	54.00	-9.26	30.20	3	Vertical	60	1.10	-	38.90	10.72	35.08			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX


5700MHz_TX

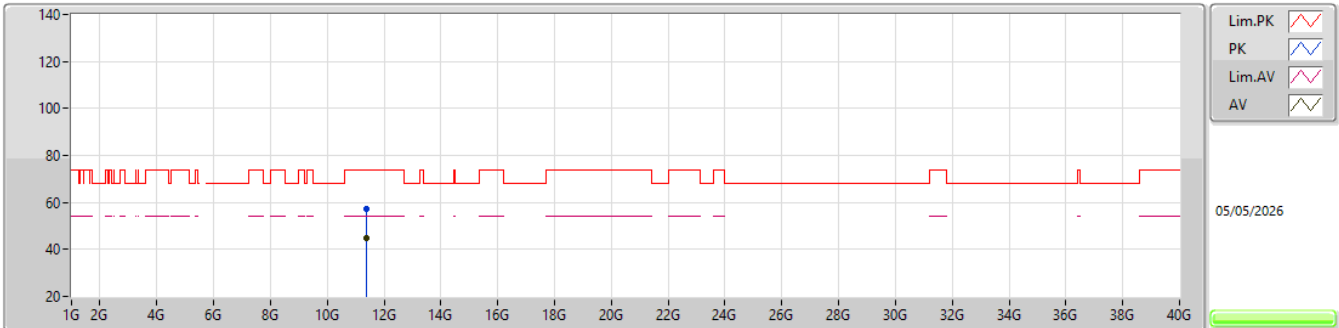EUT_V_1TX
Setting 13.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.39844G	57.40	74.00	-16.60	42.87	3	Horizontal	226	2.71	-	38.90	10.71	35.08			
AV	11.40018G	44.74	54.00	-9.26	30.20	3	Horizontal	226	2.71	-	38.90	10.72	35.08			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5700MHz_TX

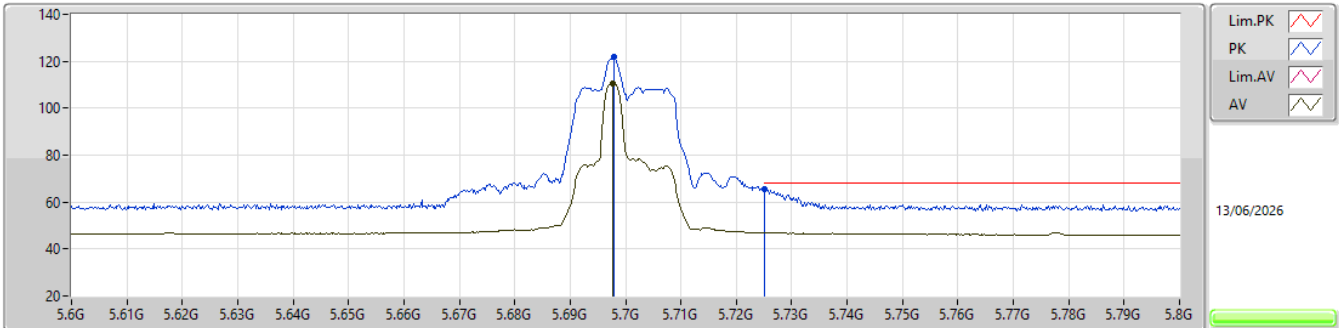EUT_Y_1TX
Setting 19
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.698G	121.78	Inf	-Inf	114.96	3	Vertical	218	2.60	-	34.31	7.43	34.92			
AV	5.6976G	110.58	Inf	-Inf	103.76	3	Vertical	218	2.60	-	34.31	7.43	34.92			
PK	5.725G	65.40	68.20	-2.80	58.58	3	Vertical	218	2.60	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5700MHz_TX

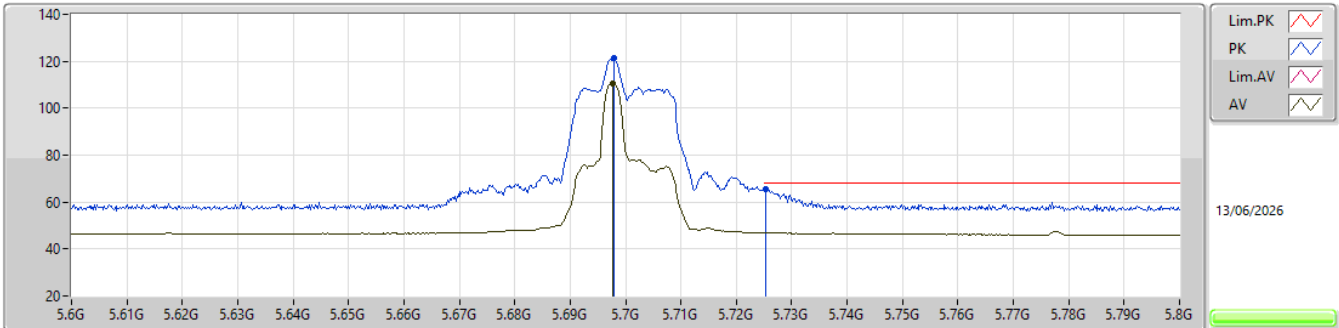EUT_Y_1TX
Setting 19
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.698G	121.27	Inf	-Inf	114.45	3	Horizontal	179	1.80	-	34.31	7.43	34.92			
AV	5.6976G	110.34	Inf	-Inf	103.52	3	Horizontal	179	1.80	-	34.31	7.43	34.92			
PK	5.7254G	65.41	68.20	-2.79	58.59	3	Horizontal	179	1.80	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5700MHz_TX

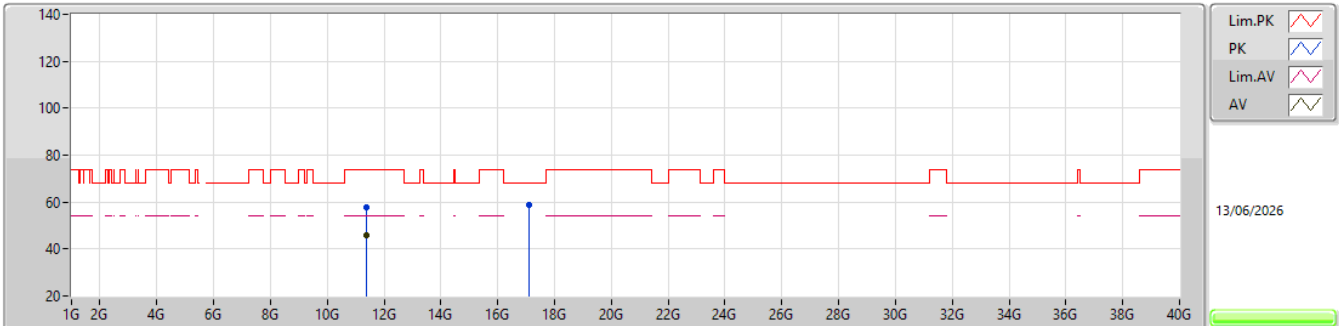EUT_Y_1TX
Setting 19
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39607G	57.83	74.00	-16.17	74.54	3	Vertical	169	2.02	-	38.89	10.71	66.31			
AV	11.3955G	45.84	54.00	-8.16	62.55	3	Vertical	169	2.02	-	38.89	10.71	66.31			
PK	17.09256G	58.91	68.20	-9.29	69.51	3	Vertical	141.9	1.69	-	40.29	12.88	63.77			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5700MHz_TX

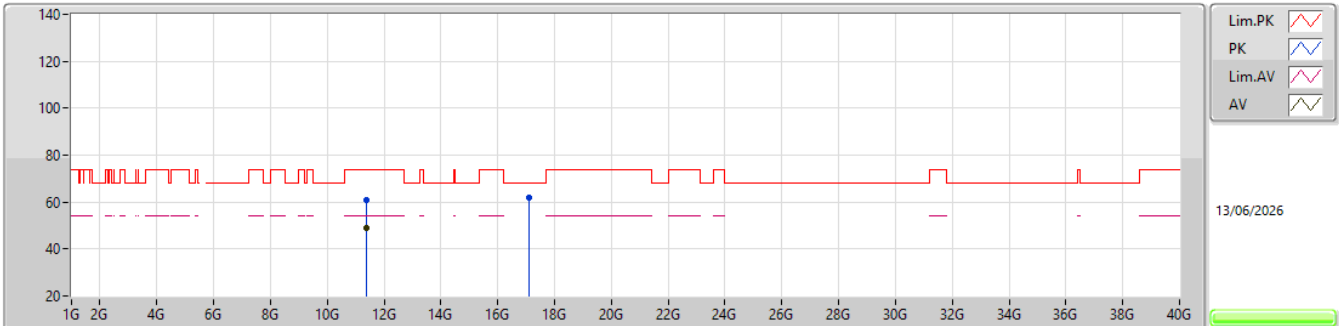EUT_Y_1TX
Setting 19
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39604G	61.08	74.00	-12.92	77.79	3	Horizontal	186	1.80	-	38.89	10.71	66.31			
AV	11.39544G	49.15	54.00	-4.85	65.86	3	Horizontal	186	1.80	-	38.89	10.71	66.31			
PK	17.09388G	61.65	68.20	-6.55	72.25	3	Horizontal	220	1.90	-	40.29	12.88	63.77			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5700MHz_TX

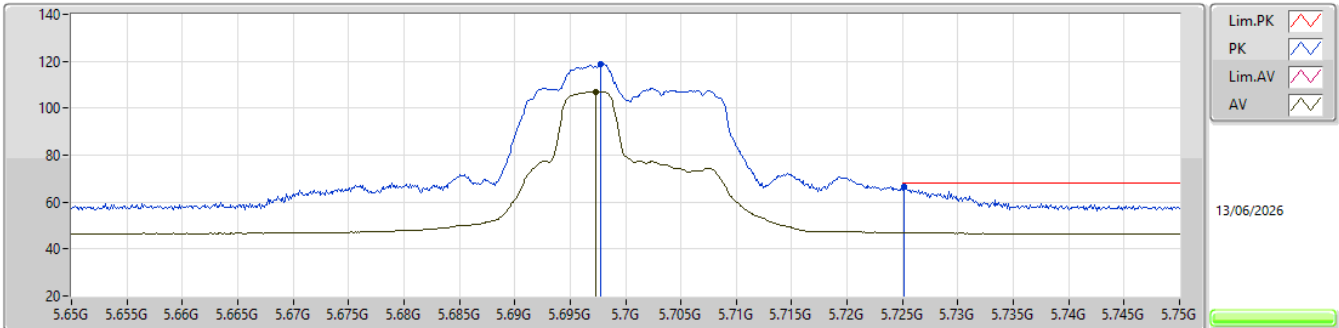EUT_Y_1TX
Setting 19
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6978G	118.78	Inf	-Inf	111.96	3	Vertical	213	1.83	-	34.31	7.43	34.92			
AV	5.6973G	107.07	Inf	-Inf	100.25	3	Vertical	213	1.83	-	34.31	7.43	34.92			
PK	5.7251G	66.32	68.20	-1.88	59.50	3	Vertical	213	1.83	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5700MHz_TX

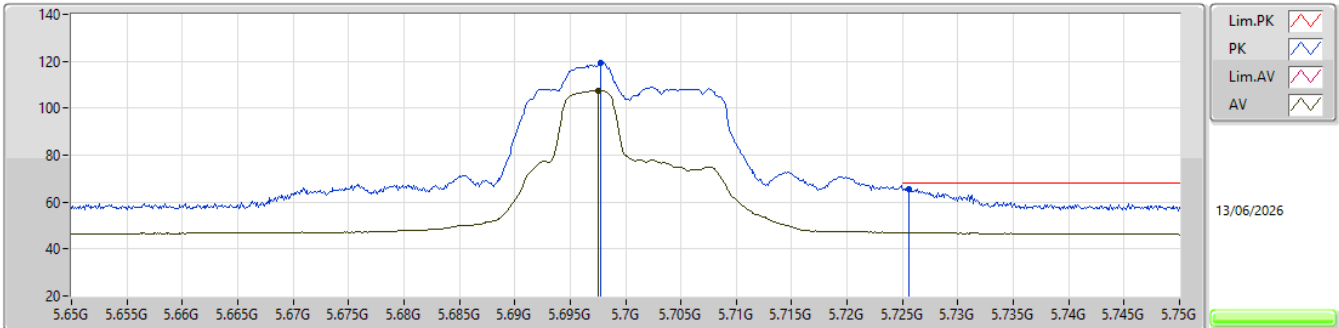EUT_Y_1TX
Setting 19
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6977G	119.37	Inf	-Inf	112.55	3	Horizontal	154	1.78	-	34.31	7.43	34.92			
AV	5.6975G	107.45	Inf	-Inf	100.63	3	Horizontal	154	1.78	-	34.31	7.43	34.92			
PK	5.7256G	65.76	68.20	-2.44	58.94	3	Horizontal	154	1.78	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5700MHz_TX

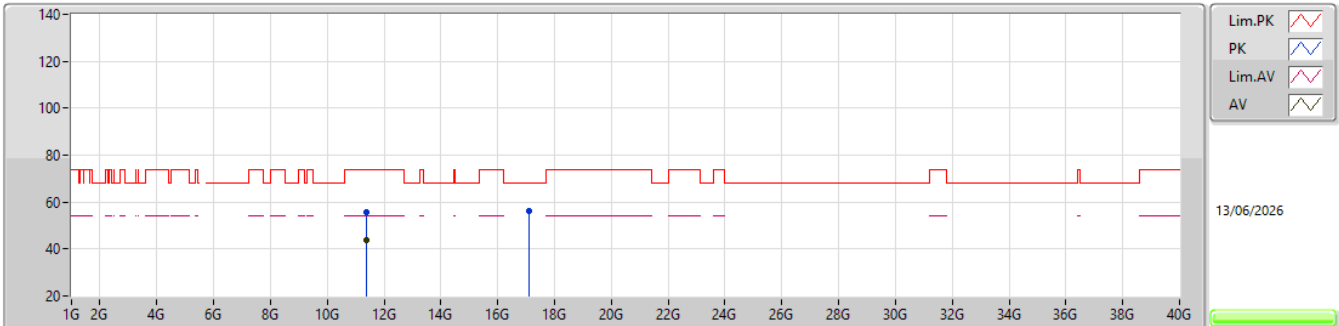EUT_Y_1TX
Setting 19
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3935G	55.78	74.00	-18.22	72.49	3	Vertical	168	2.01	-	38.89	10.71	66.31			
AV	11.3935G	43.66	54.00	-10.34	60.37	3	Vertical	168	2.01	-	38.89	10.71	66.31			
PK	17.09345G	56.22	68.20	-11.98	66.82	3	Vertical	144	1.64	-	40.29	12.88	63.77			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5700MHz_TX

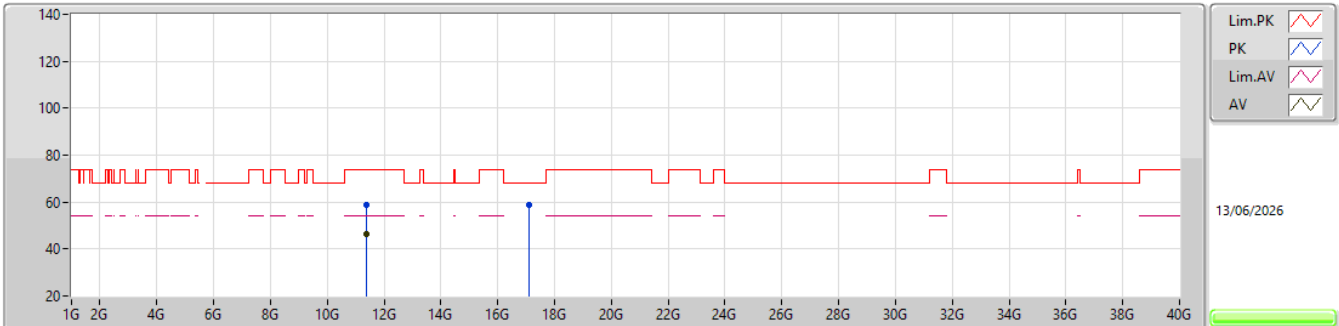EUT_Y_1TX
Setting 19
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3959G	59.04	74.00	-14.96	75.75	3	Horizontal	185	1.62	-	38.89	10.71	66.31			
AV	11.3937G	46.58	54.00	-7.42	63.29	3	Horizontal	185	1.62	-	38.89	10.71	66.31			
PK	17.0906G	58.56	68.20	-9.64	69.17	3	Horizontal	221	1.88	-	40.28	12.87	63.76			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5700MHz_TX

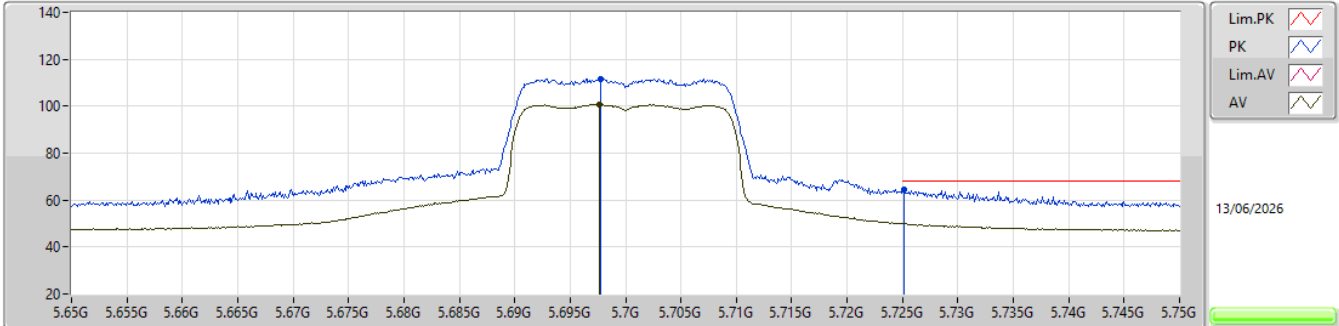


EUT_Y_1TX
Setting 18.5
03-Y-G-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6978G	111.81	Inf	-Inf	104.99	3	Vertical	220	2.61	-	34.31	7.43	34.92			
AV	5.6976G	100.81	Inf	-Inf	93.99	3	Vertical	220	2.61	-	34.31	7.43	34.92			
PK	5.7251G	64.36	68.20	-3.84	57.54	3	Vertical	220	2.61	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5700MHz_TX

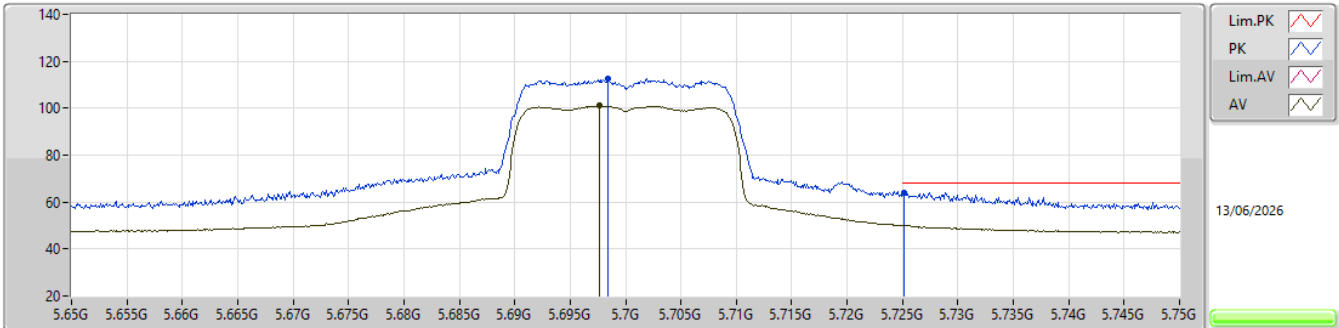EUT_Y_1TX
Setting 18.5
03-Y-G-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6984G	112.75	Inf	-Inf	105.93	3	Horizontal	150	1.80	-	34.31	7.43	34.92			
AV	5.6976G	101.07	Inf	-Inf	94.25	3	Horizontal	150	1.80	-	34.31	7.43	34.92			
PK	5.7251G	64.10	68.20	-4.10	57.28	3	Horizontal	150	1.80	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5700MHz_TX

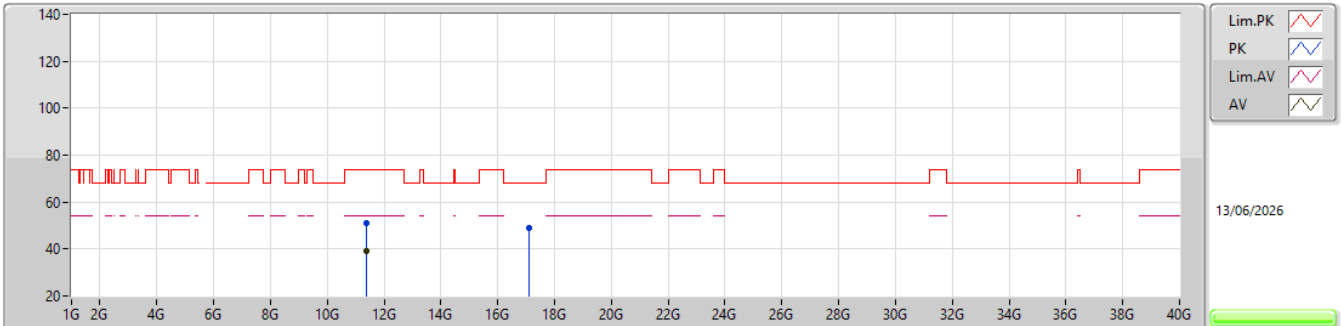


EUT_Y_1TX
Setting 18.5
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3996G	50.88	74.00	-23.12	67.58	3	Vertical	20	1.75	-	38.90	10.71	66.31			
AV	11.39985G	39.02	54.00	-14.98	55.72	3	Vertical	20	1.75	-	38.90	10.71	66.31			
PK	17.08605G	48.72	68.20	-19.48	59.34	3	Vertical	164	2.96	-	40.27	12.87	63.76			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5700MHz_TX

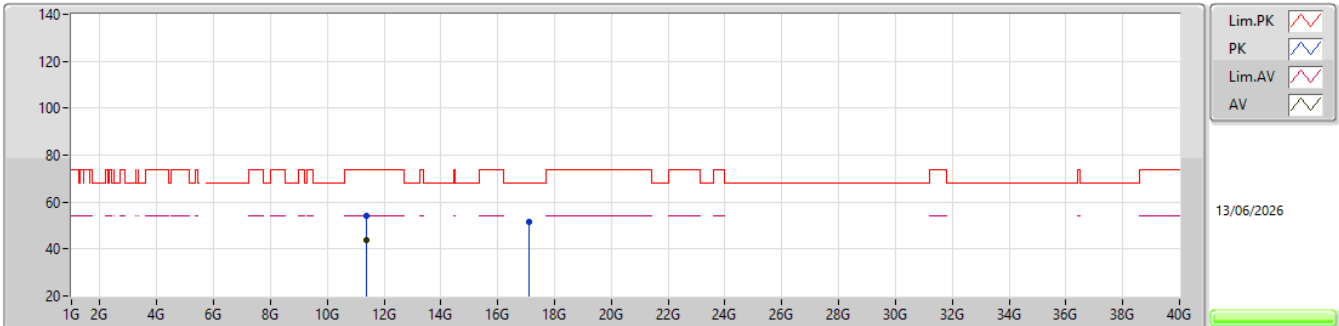EUT_Y_1TX
Setting 18.5
03-Y-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.4002G	54.35	74.00	-19.65	71.04	3	Horizontal	239	1.71	-	38.90	10.72	66.31			
AV	11.3999G	43.93	54.00	-10.07	60.63	3	Horizontal	239	1.71	-	38.90	10.71	66.31			
PK	17.1028G	51.73	68.20	-16.47	62.32	3	Horizontal	220	1.89	-	40.31	12.88	63.78			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5720MHz Straddle 5.47-5.725GHz_TX

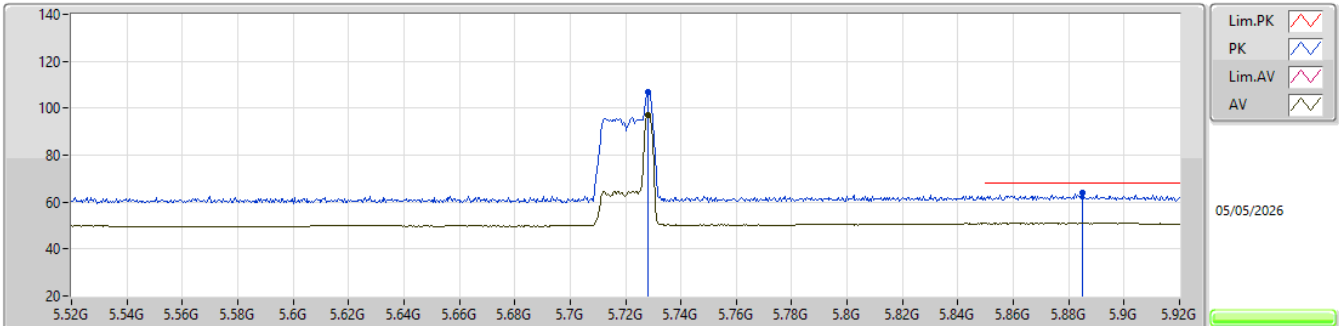


EUT_Y_1TX
Setting 8.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.728G	106.90	Inf	-Inf	100.08	3	Vertical	24	1.97	-	34.30	7.45	34.93			
AV	5.728G	97.27	Inf	-Inf	90.45	3	Vertical	24	1.97	-	34.30	7.45	34.93			
PK	5.8848G	64.08	68.20	-4.12	56.97	3	Vertical	24	1.97	-	34.57	7.52	34.98			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5720MHz Straddle 5.47-5.725GHz_TX

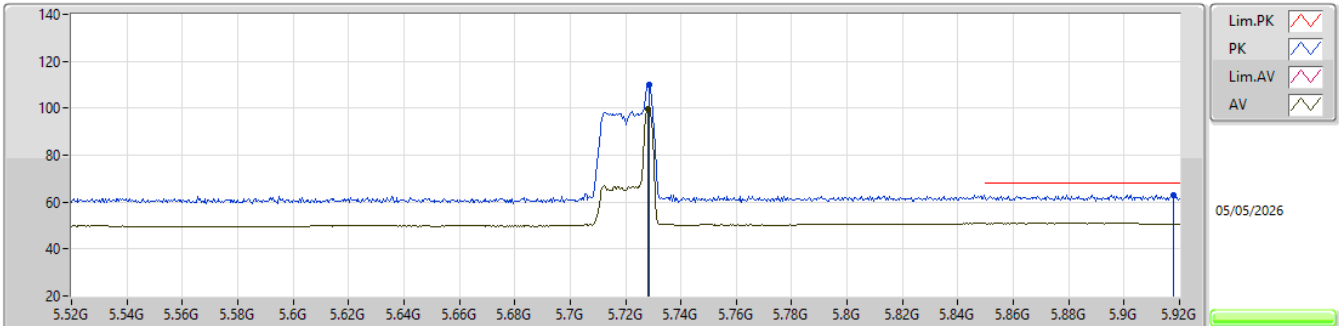


EUT_Y_1TX
Setting 8.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7284G	110.02	Inf	-Inf	103.20	3	Horizontal	180	1.80	-	34.30	7.45	34.93			
AV	5.728G	99.69	Inf	-Inf	92.87	3	Horizontal	180	1.80	-	34.30	7.45	34.93			
PK	5.9176G	63.15	68.20	-5.05	55.98	3	Horizontal	180	1.80	-	34.64	7.52	34.99			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5720MHz Straddle 5.47-5.725GHz_TX

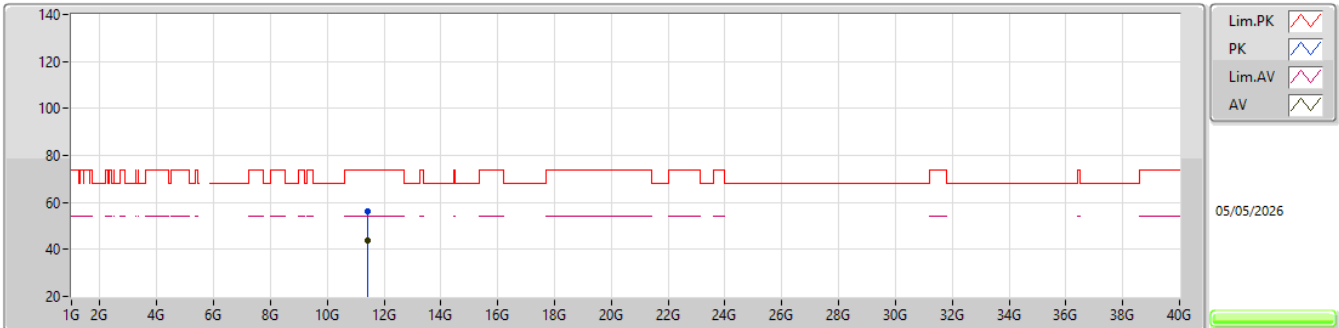


EUT_V_1TX
Setting 8.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43919G	56.41	74.00	-17.59	41.79	3	Vertical	228	1.17	-	38.98	10.73	35.09			
AV	11.43877G	43.81	54.00	-10.19	29.19	3	Vertical	228	1.17	-	38.98	10.73	35.09			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX


5720MHz Straddle 5.47-5.725GHz_TX

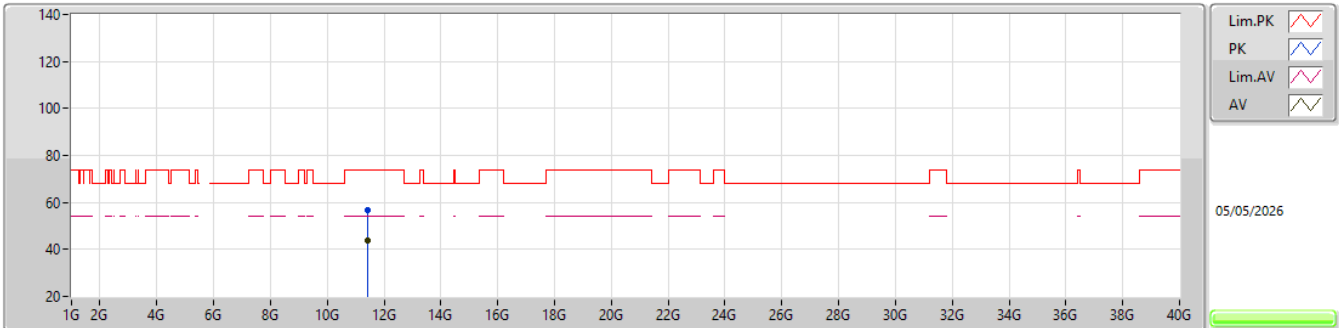EUT_V_1TX
Setting 8.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43836G	56.51	74.00	-17.49	41.89	3	Horizontal	232	1.63	-	38.98	10.73	35.09			
AV	11.43929G	43.80	54.00	-10.20	29.18	3	Horizontal	232	1.63	-	38.98	10.73	35.09			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5720MHz Straddle 5.47-5.725GHz_TX

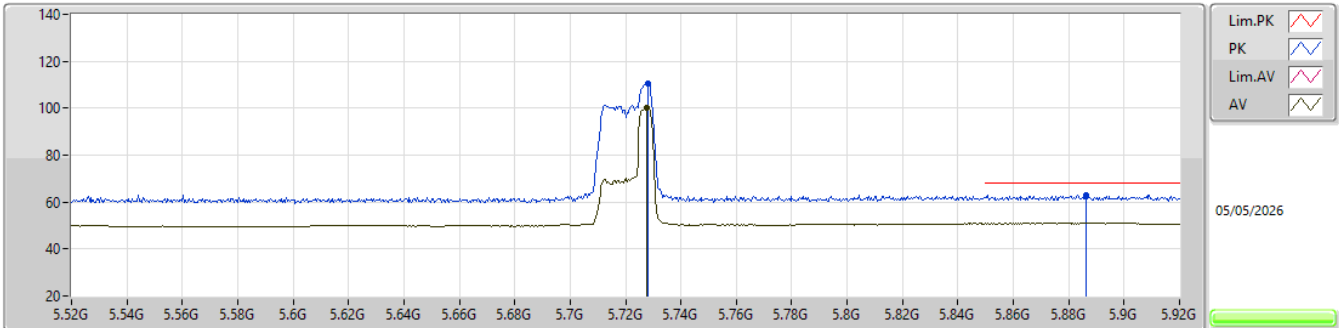


EUT_Y_1TX
Setting 11.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.728G	110.45	Inf	-Inf	103.63	3	Vertical	183	1.80	-	34.30	7.45	34.93			
AV	5.7276G	99.94	Inf	-Inf	93.12	3	Vertical	183	1.80	-	34.30	7.45	34.93			
PK	5.8864G	62.94	68.20	-5.26	55.83	3	Vertical	183	1.80	-	34.57	7.52	34.98			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5720MHz Straddle 5.47-5.725GHz_TX

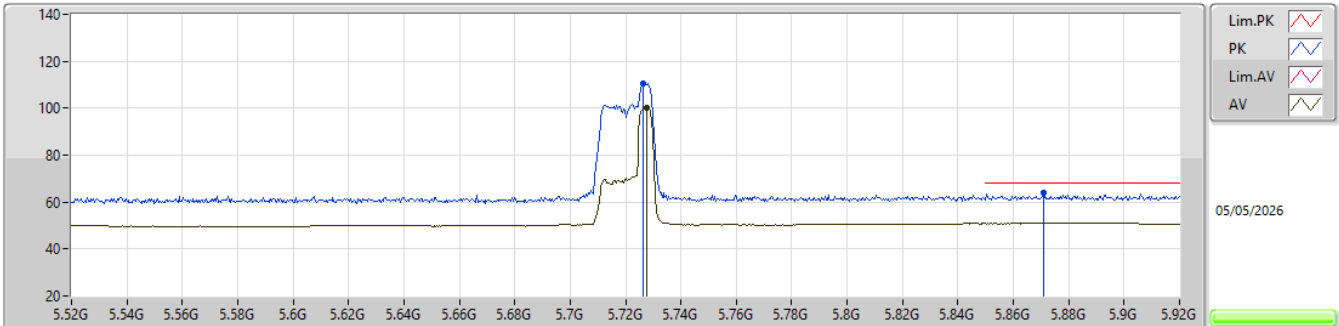


EUTY_1TX
Setting 11.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7264G	110.59	Inf	-Inf	103.77	3	Horizontal	186	1.76	-	34.30	7.45	34.93			
AV	5.7276G	100.15	Inf	-Inf	93.33	3	Horizontal	186	1.76	-	34.30	7.45	34.93			
PK	5.8708G	63.95	68.20	-4.25	56.86	3	Horizontal	186	1.76	-	34.54	7.52	34.97			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5720MHz Straddle 5.47-5.725GHz_TX

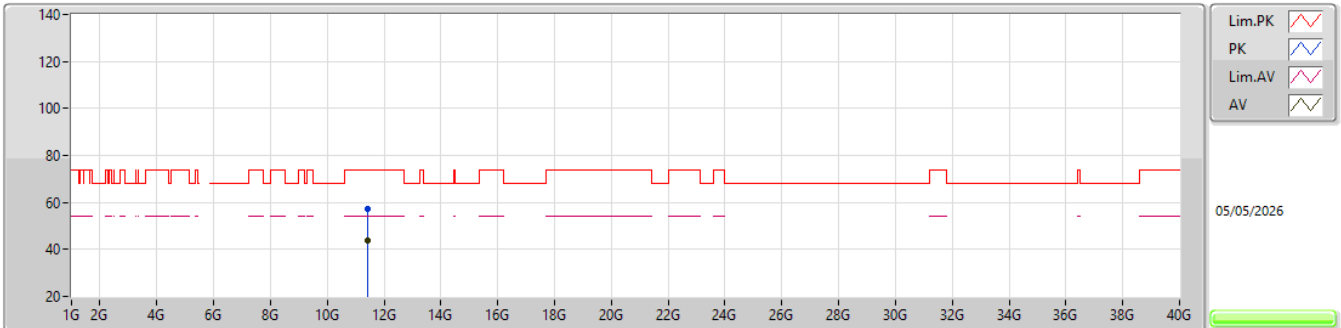


EUT_Y_1TX
Setting 11.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43827G	57.10	74.00	-16.90	42.48	3	Vertical	238	1.48	-	38.98	10.73	35.09			
AV	11.43877G	43.81	54.00	-10.19	29.19	3	Vertical	238	1.48	-	38.98	10.73	35.09			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5720MHz Straddle 5.47-5.725GHz_TX

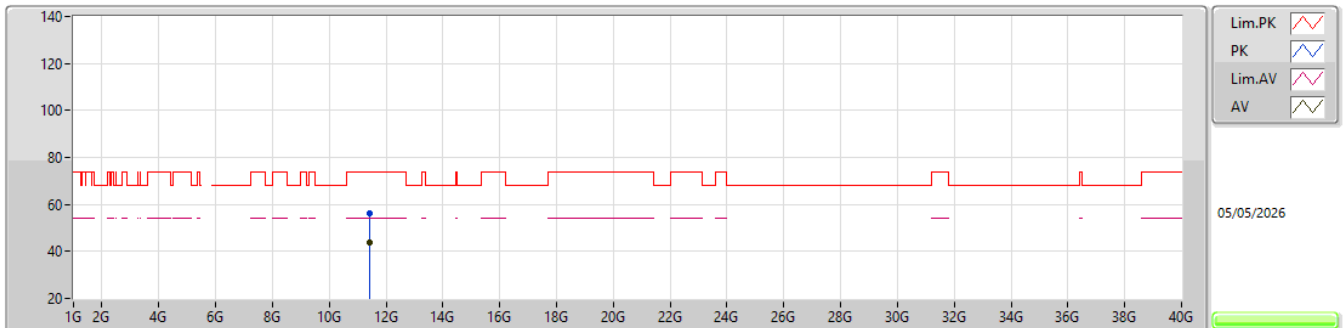


EUT Y_1TX
Setting 11.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43851G	56.42	74.00	-17.58	41.80	3	Horizontal	337	2.85	-	38.98	10.73	35.09			
AV	11.43874G	43.81	54.00	-10.19	29.19	3	Horizontal	337	2.85	-	38.98	10.73	35.09			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5720MHz Straddle 5.47-5.725GHz_TX

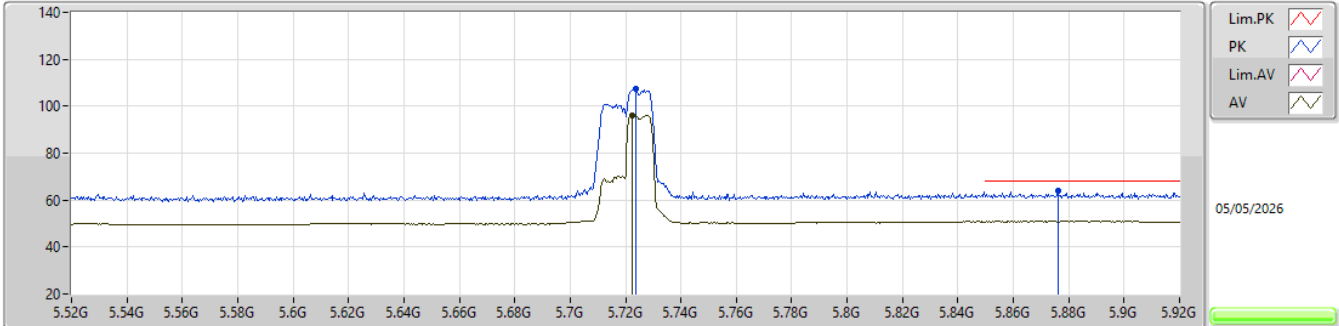


EUT_Y_1TX
Setting 14.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7236G	107.41	Inf	-Inf	100.59	3	Vertical	31	1.98	-	34.30	7.45	34.93				
AV	5.7224G	96.26	Inf	-Inf	89.44	3	Vertical	31	1.98	-	34.30	7.45	34.93				
PK	5.876G	63.84	68.20	-4.36	56.74	3	Vertical	31	1.98	-	34.55	7.52	34.97				

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5720MHz Straddle 5.47-5.725GHz_TX

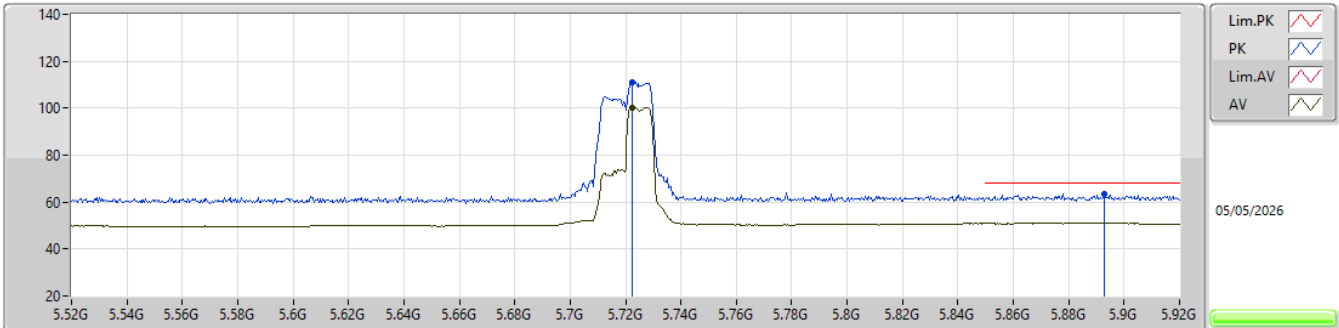


EUTY_1TX
Setting 14.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7224G	111.08	Inf	-Inf	104.26	3	Horizontal	185	1.80	-	34.30	7.45	34.93			
AV	5.7224G	100.36	Inf	-Inf	93.54	3	Horizontal	185	1.80	-	34.30	7.45	34.93			
PK	5.8928G	63.45	68.20	-4.75	56.32	3	Horizontal	185	1.80	-	34.59	7.52	34.98			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5720MHz Straddle 5.47-5.725GHz_TX

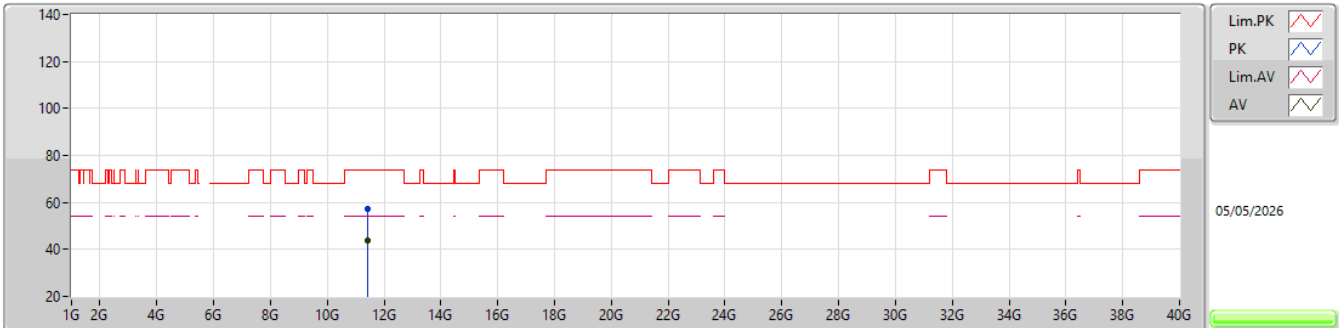


EUT_Y_1TX
Setting 14.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.4412G	57.15	74.00	-16.85	42.53	3	Vertical	233	2.74	-	38.98	10.73	35.09			
AV	11.43888G	43.81	54.00	-10.19	29.19	3	Vertical	233	2.74	-	38.98	10.73	35.09			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5720MHz Straddle 5.47-5.725GHz_TX

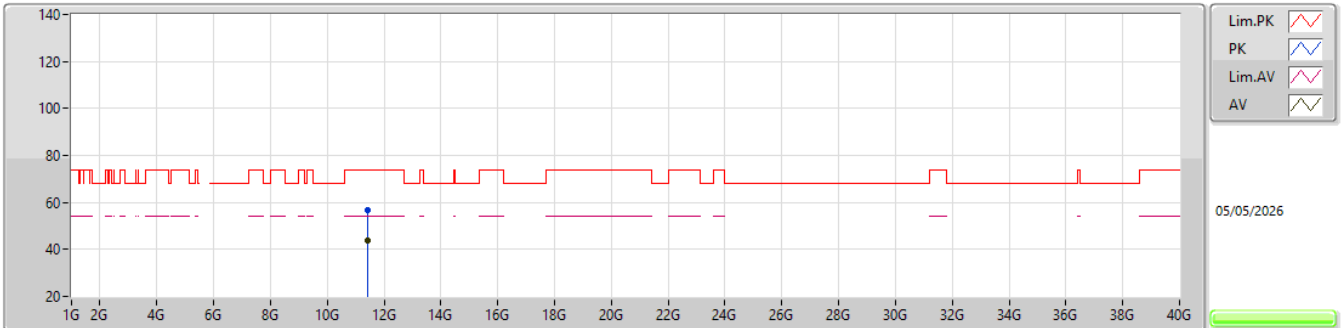


EUT_V_1TX
Setting 14.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43923G	56.48	74.00	-17.52	41.86	3	Horizontal	53	1.14	-	38.98	10.73	35.09			
AV	11.43885G	43.81	54.00	-10.19	29.19	3	Horizontal	53	1.14	-	38.98	10.73	35.09			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5720MHz Straddle 5.47-5.725GHz_TX

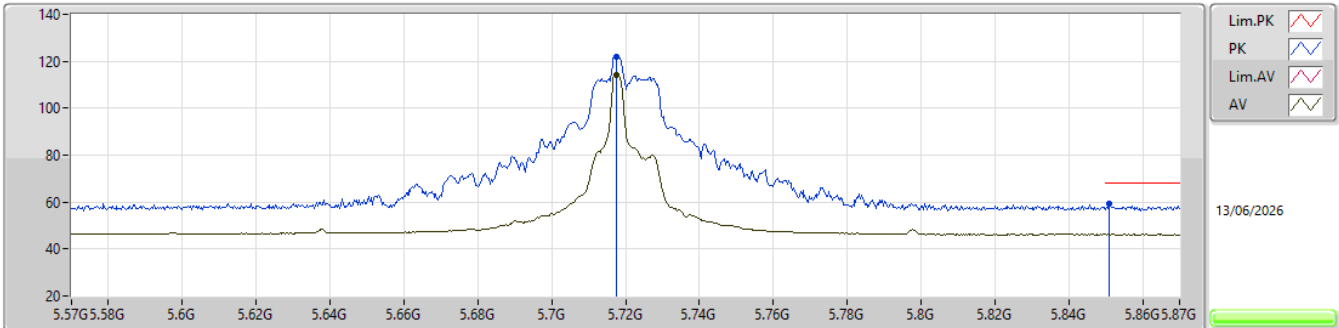


EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7176G	122.15	Inf	-Inf	115.34	3	Vertical	213	1.88	-	34.30	7.44	34.93			
AV	5.7176G	114.23	Inf	-Inf	107.42	3	Vertical	213	1.88	-	34.30	7.44	34.93			
PK	5.8508G	59.25	68.20	-8.95	52.20	3	Vertical	213	1.88	-	34.50	7.52	34.97			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5720MHz Straddle 5.47-5.725GHz_TX

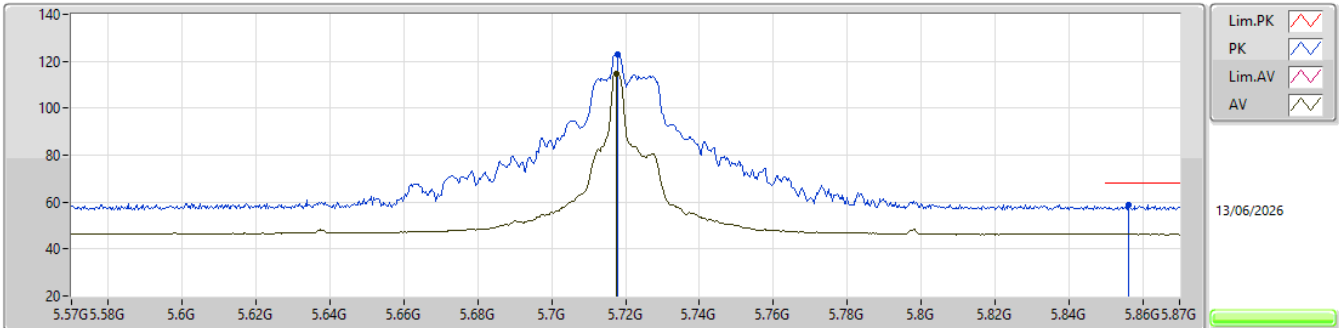EUT Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7179G	122.80	Inf	-Inf	115.99	3	Horizontal	164	1.80	-	34.30	7.44	34.93			
AV	5.7176G	114.82	Inf	-Inf	108.01	3	Horizontal	164	1.80	-	34.30	7.44	34.93			
PK	5.8562G	58.91	68.20	-9.29	51.85	3	Horizontal	164	1.80	-	34.51	7.52	34.97			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5720MHz Straddle 5.47-5.725GHz_TX

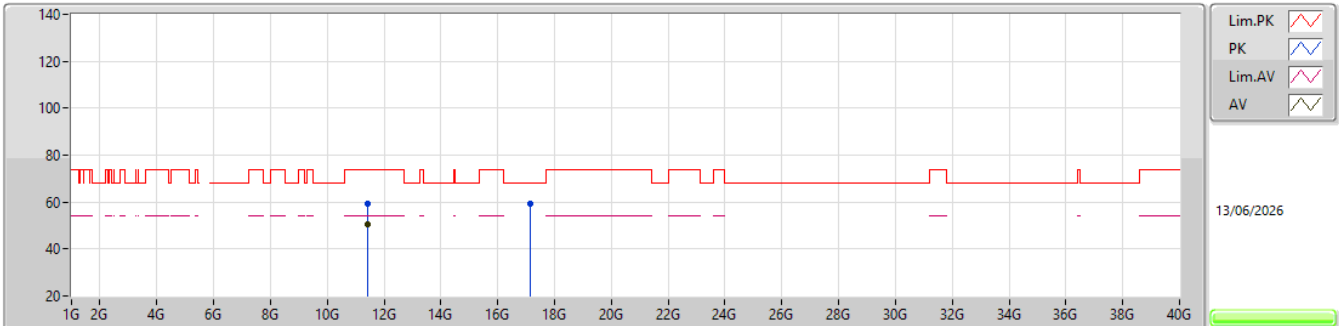EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43667G	59.34	74.00	-14.66	75.96	3	Vertical	144	2.10	-	38.97	10.73	66.32			
AV	11.43541G	50.70	54.00	-3.30	67.32	3	Vertical	144	2.10	-	38.97	10.73	66.32			
PK	17.15466G	59.35	68.20	-8.85	69.80	3	Vertical	216	1.85	-	40.51	12.90	63.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5720MHz Straddle 5.47-5.725GHz_TX

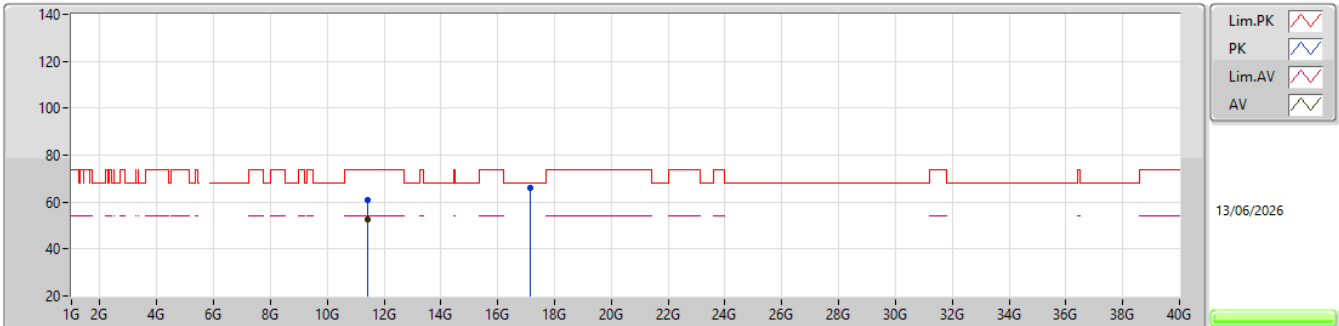EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43646G	60.91	74.00	-13.09	77.53	3	Horizontal	188	1.66	-	38.97	10.73	66.32			
AV	11.43541G	52.38	54.00	-1.62	69.00	3	Horizontal	188	1.66	-	38.97	10.73	66.32			
PK	17.15307G	65.93	68.20	-2.27	76.38	3	Horizontal	218	1.90	-	40.51	12.90	63.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5720MHz Straddle 5.47-5.725GHz_TX

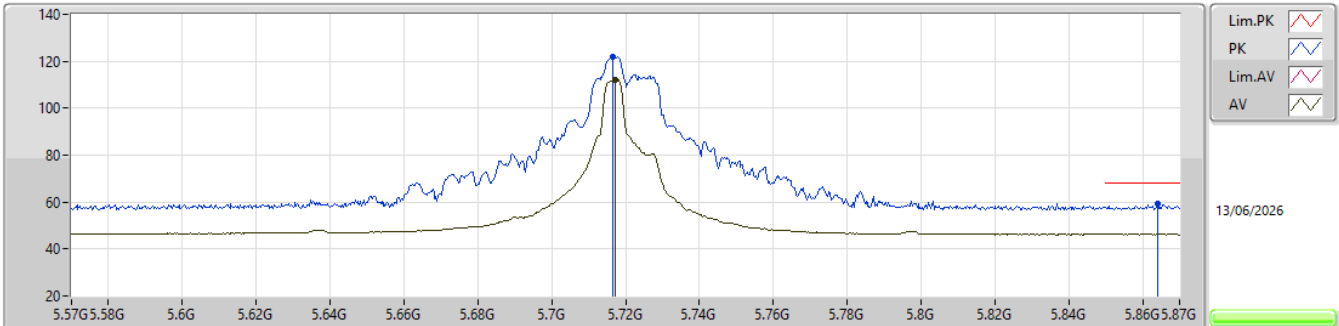


EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7167G	121.94	Inf	-Inf	115.13	3	Vertical	218	2.57	-	34.30	7.44	34.93			
AV	5.7173G	112.17	Inf	-Inf	105.36	3	Vertical	218	2.57	-	34.30	7.44	34.93			
PK	5.864G	59.38	68.20	-8.82	52.30	3	Vertical	218	2.57	-	34.53	7.52	34.97			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5720MHz Straddle 5.47-5.725GHz_TX

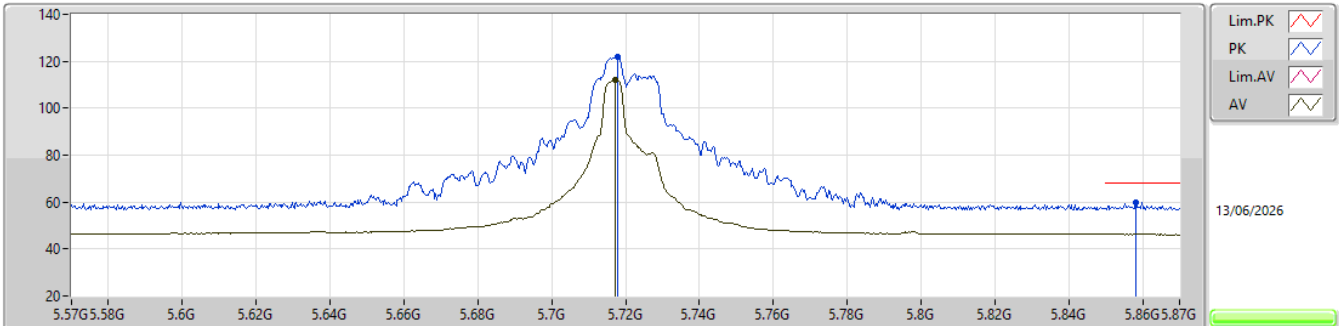EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7179G	121.78	Inf	-Inf	114.97	3	Horizontal	163	1.80	-	34.30	7.44	34.93			
AV	5.7173G	112.06	Inf	-Inf	105.25	3	Horizontal	163	1.80	-	34.30	7.44	34.93			
PK	5.8583G	59.74	68.20	-8.46	52.67	3	Horizontal	163	1.80	-	34.52	7.52	34.97			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5720MHz Straddle 5.47-5.725GHz_TX

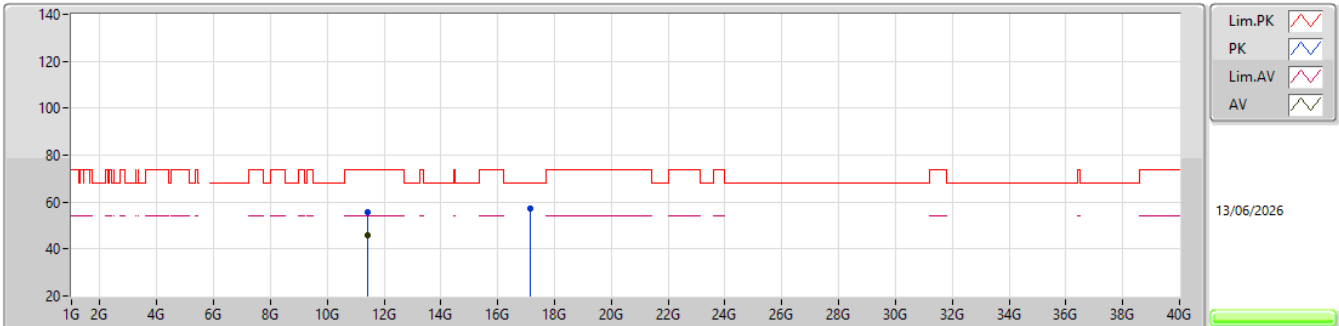EUT_Y_1TX
Setting 28
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43095G	55.92	74.00	-18.08	72.55	3	Vertical	20	1.55	-	38.96	10.73	66.32			
AV	11.43355G	45.92	54.00	-8.08	62.54	3	Vertical	20	1.55	-	38.97	10.73	66.32			
PK	17.1506G	57.29	68.20	-10.91	67.74	3	Vertical	218	1.80	-	40.50	12.90	63.85			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5720MHz Straddle 5.47-5.725GHz_TX

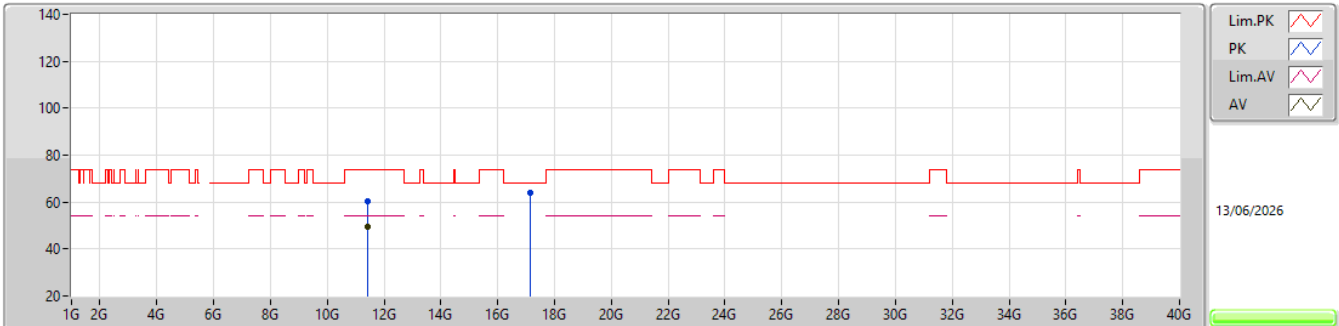EUT Y_1TX
Setting 28
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4344G	60.21	74.00	-13.79	76.83	3	Horizontal	187	1.69	-	38.97	10.73	66.32			
AV	11.43345G	49.53	54.00	-4.47	66.15	3	Horizontal	187	1.69	-	38.97	10.73	66.32			
PK	17.14995G	64.04	68.20	-4.16	74.49	3	Horizontal	221	1.87	-	40.50	12.90	63.85			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5720MHz Straddle 5.47-5.725GHz_TX

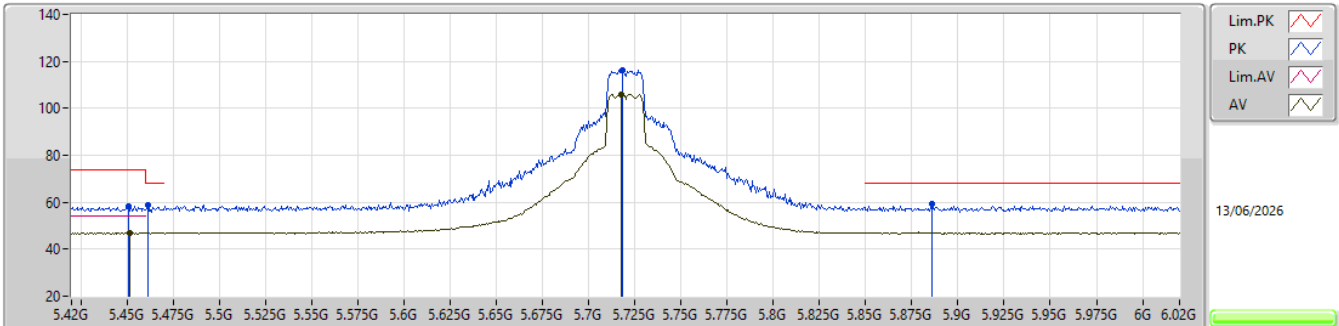


EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4506G	58.48	74.00	-15.52	51.41	3	Vertical	220	2.57	-	34.70	7.24	34.87			
AV	5.4518G	46.92	54.00	-7.08	39.85	3	Vertical	220	2.57	-	34.70	7.24	34.87			
PK	5.4614G	59.01	68.20	-9.19	51.93	3	Vertical	220	2.57	-	34.70	7.25	34.87			
PK	5.7182G	116.32	Inf	-Inf	109.51	3	Vertical	220	2.57	-	34.30	7.44	34.93			
AV	5.7176G	105.96	Inf	-Inf	99.15	3	Vertical	220	2.57	-	34.30	7.44	34.93			
PK	5.8862G	59.26	68.20	-8.94	52.15	3	Vertical	220	2.57	-	34.57	7.52	34.98			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5720MHz Straddle 5.47-5.725GHz_TX

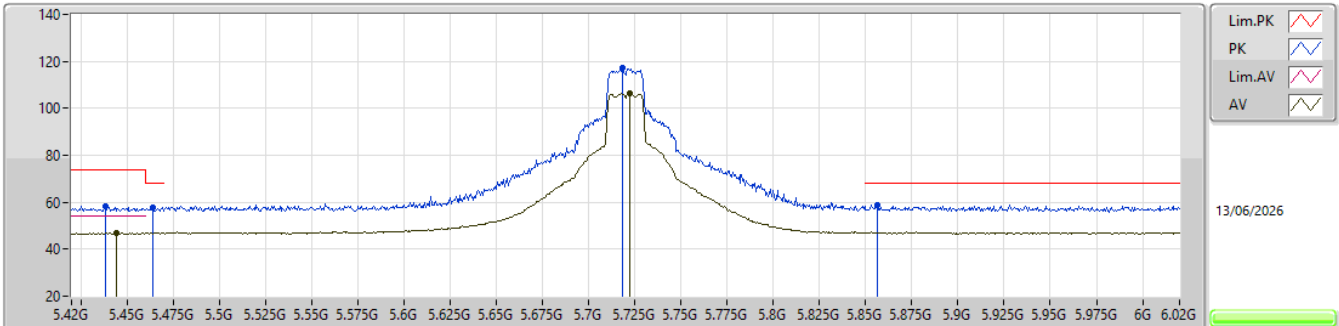


EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4386G	58.19	74.00	-15.81	51.13	3	Horizontal	162	1.80	-	34.70	7.23	34.87			
AV	5.444G	47.04	54.00	-6.96	39.98	3	Horizontal	162	1.80	-	34.70	7.23	34.87			
PK	5.4638G	57.83	68.20	-10.37	50.75	3	Horizontal	162	1.80	-	34.70	7.25	34.87			
PK	5.7182G	117.26	Inf	-Inf	110.45	3	Horizontal	162	1.80	-	34.30	7.44	34.93			
AV	5.7224G	106.36	Inf	-Inf	99.54	3	Horizontal	162	1.80	-	34.30	7.45	34.93			
PK	5.8562G	58.82	68.20	-9.38	51.76	3	Horizontal	162	1.80	-	34.51	7.52	34.97			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5720MHz Straddle 5.47-5.725GHz_TX

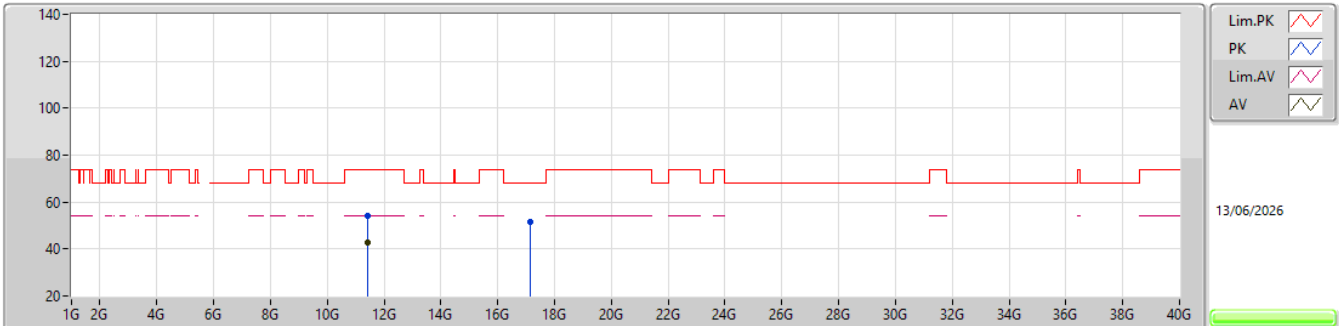EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4407G	53.93	74.00	-20.07	70.54	3	Vertical	138	2.15	-	38.98	10.73	66.32			
AV	11.43995G	42.69	54.00	-11.31	59.30	3	Vertical	138	2.15	-	38.98	10.73	66.32			
PK	17.15685G	51.33	68.20	-16.87	61.78	3	Vertical	217	1.80	-	40.51	12.90	63.86			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5720MHz Straddle 5.47-5.725GHz_TX

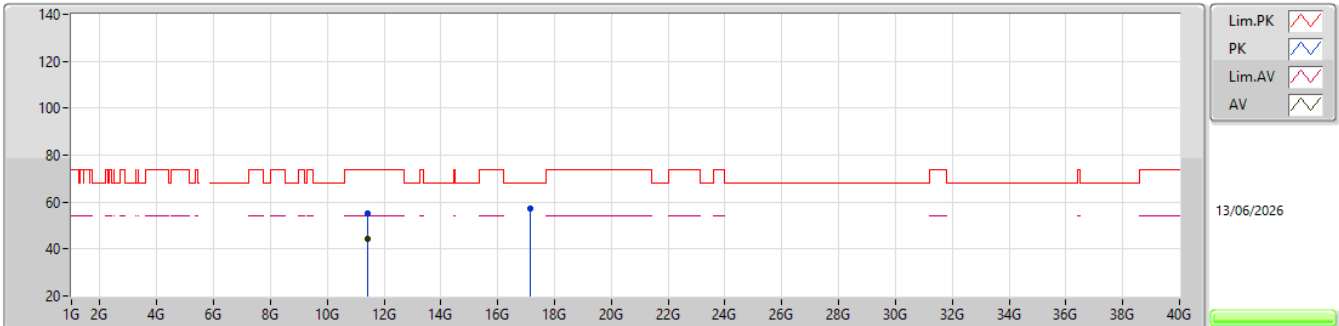EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44015G	55.20	74.00	-18.80	71.81	3	Horizontal	240	1.73	-	38.98	10.73	66.32			
AV	11.43995G	44.48	54.00	-9.52	61.09	3	Horizontal	240	1.73	-	38.98	10.73	66.32			
PK	17.1509G	57.38	68.20	-10.82	67.83	3	Horizontal	217	1.90	-	40.50	12.90	63.85			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5745MHz_TX

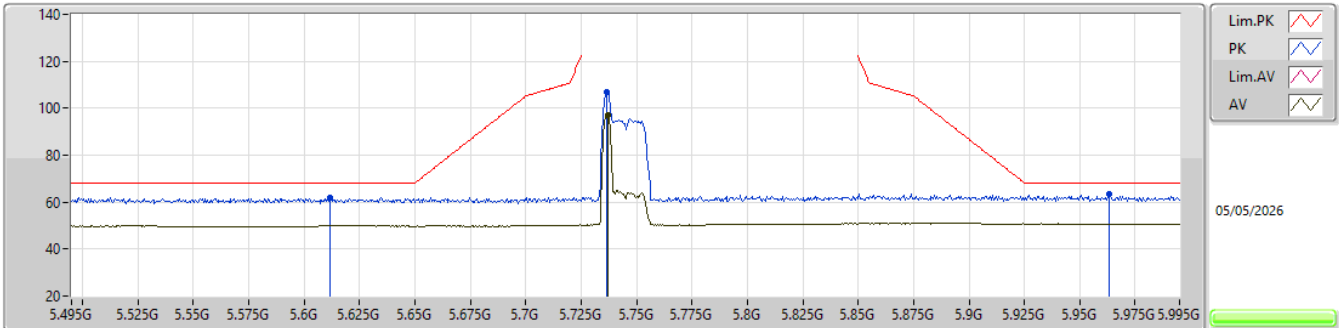


EUT_Y_1TX
Setting 6.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6115G	62.04	68.20	-6.16	54.99	3	Vertical	24	1.80	-	34.58	7.36	34.89			
PK	5.7365G	106.89	Inf	-Inf	100.06	3	Vertical	24	1.80	-	34.30	7.46	34.93			
AV	5.737G	97.03	Inf	-Inf	90.20	3	Vertical	24	1.80	-	34.30	7.46	34.93			
PK	5.9635G	63.29	68.20	-4.91	56.03	3	Vertical	24	1.80	-	34.73	7.53	35.00			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5745MHz_TX

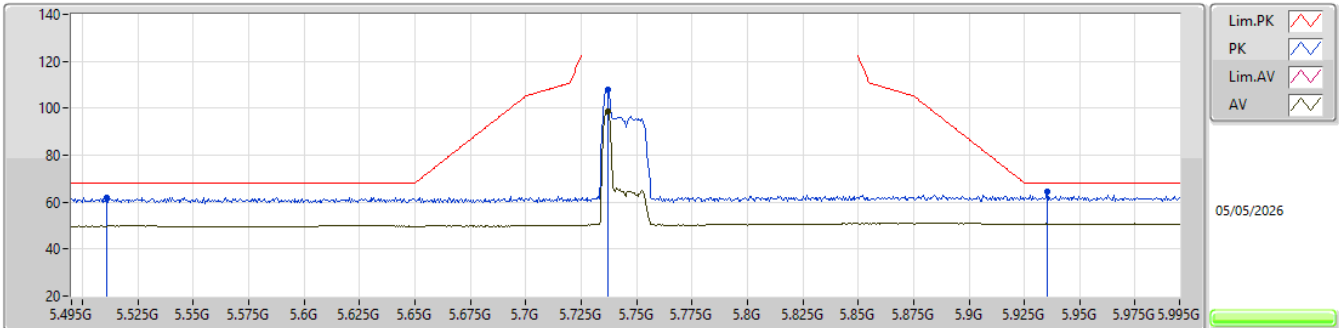


EUT_Y_1TX
Setting 6.5
03-D-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.511G	62.11	68.20	-6.09	55.03	3	Horizontal	190	1.80	-	34.66	7.28	34.86			
PK	5.737G	107.94	Inf	-Inf	101.11	3	Horizontal	190	1.80	-	34.30	7.46	34.93			
AV	5.737G	98.51	Inf	-Inf	91.68	3	Horizontal	190	1.80	-	34.30	7.46	34.93			
PK	5.9355G	64.37	68.20	-3.83	57.17	3	Horizontal	190	1.80	-	34.67	7.52	34.99			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5745MHz_TX

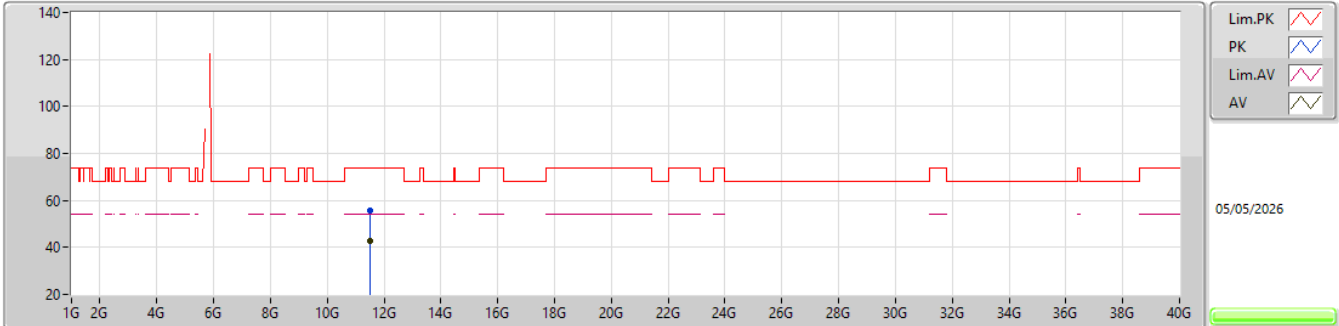


EUT_V_1TX
Setting 6.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.48889G	55.47	74.00	-18.53	40.75	3	Vertical	360	1.51	-	39.08	10.74	35.10			
AV	11.48754G	42.65	54.00	-11.35	27.93	3	Vertical	360	1.51	-	39.08	10.74	35.10			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU0_1TX

5745MHz_TX

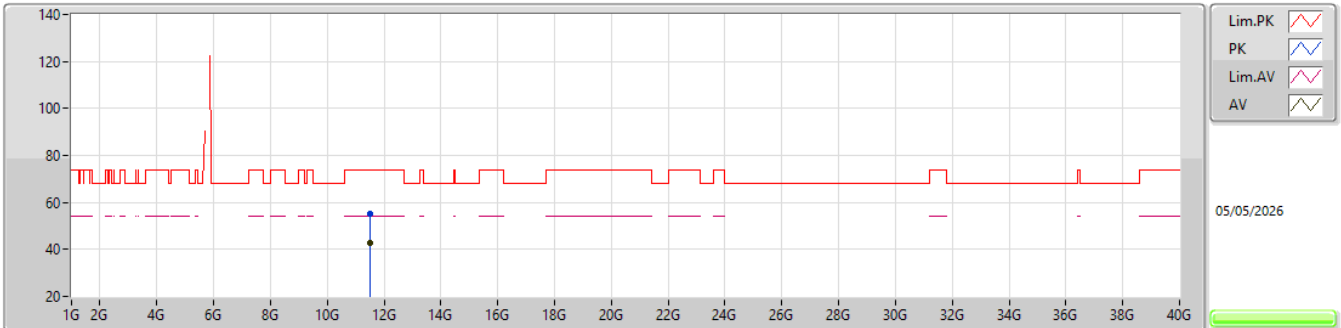


EUT_V_1TX
Setting 6.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.49046G	55.42	74.00	-18.58	40.70	3	Horizontal	136	2.54	-	39.08	10.74	35.10			
AV	11.4875G	42.65	54.00	-11.35	27.93	3	Horizontal	136	2.54	-	39.08	10.74	35.10			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5745MHz_TX

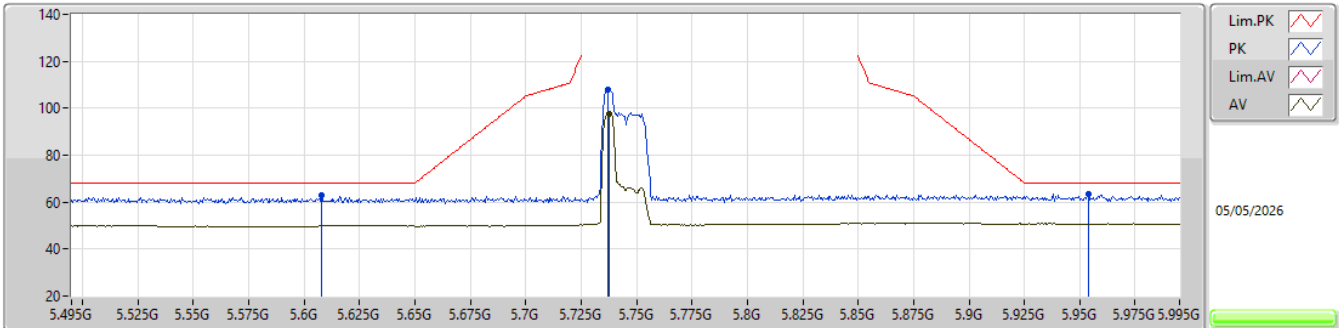


EUT_Y_1TX
Setting 9.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.608G	62.97	68.20	-5.23	55.92	3	Vertical	28	1.80	-	34.58	7.36	34.89			
PK	5.737G	107.69	Inf	-Inf	100.86	3	Vertical	28	1.80	-	34.30	7.46	34.93			
AV	5.7375G	97.46	Inf	-Inf	90.63	3	Vertical	28	1.80	-	34.30	7.46	34.93			
PK	5.954G	63.56	68.20	-4.64	56.32	3	Vertical	28	1.80	-	34.71	7.53	35.00			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5745MHz_TX

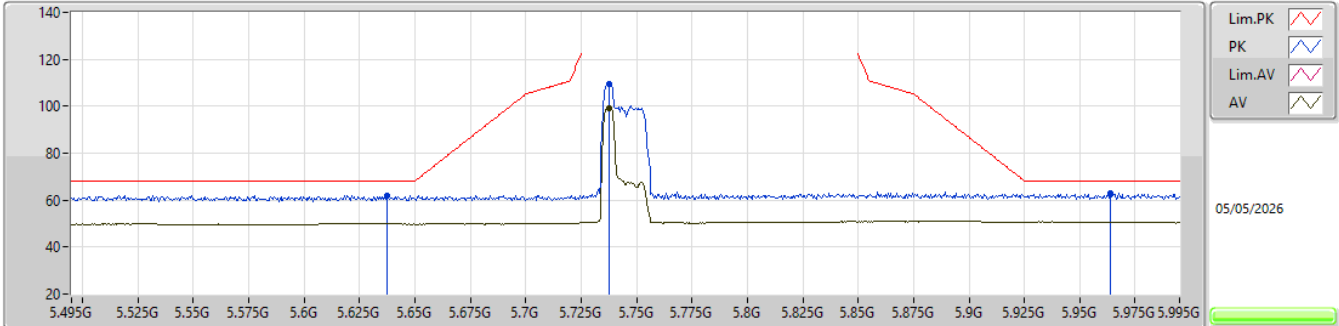


EUT_Y_1TX
Setting 9.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6375G	61.94	68.20	-6.26	54.94	3	Horizontal	188	1.80	-	34.52	7.38	34.90			
PK	5.7375G	109.73	Inf	-Inf	102.90	3	Horizontal	188	1.80	-	34.30	7.46	34.93			
AV	5.7375G	99.17	Inf	-Inf	92.34	3	Horizontal	188	1.80	-	34.30	7.46	34.93			
PK	5.964G	63.02	68.20	-5.18	55.76	3	Horizontal	188	1.80	-	34.73	7.53	35.00			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5745MHz_TX

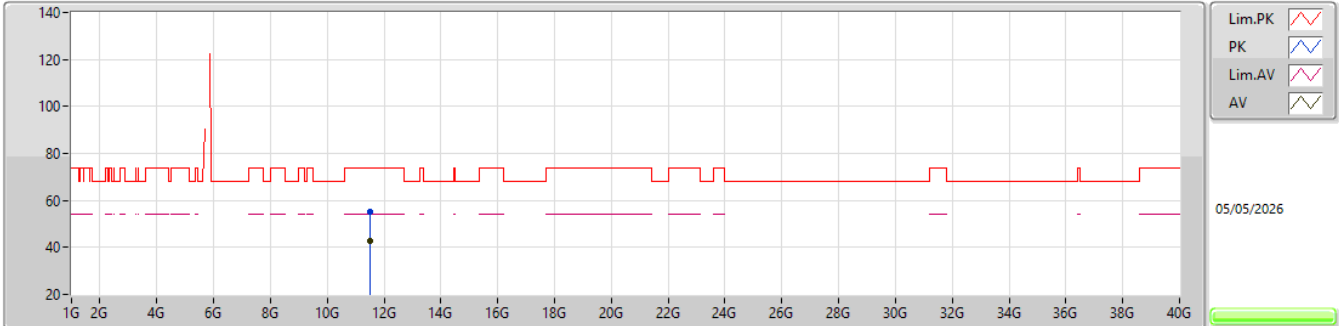


EUT_V_1TX
Setting 9.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.49111G	55.24	74.00	-18.76	40.52	3	Vertical	85	1.68	-	39.08	10.74	35.10			
AV	11.4875G	42.65	54.00	-11.35	27.93	3	Vertical	85	1.68	-	39.08	10.74	35.10			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU37_1TX

5745MHz_TX

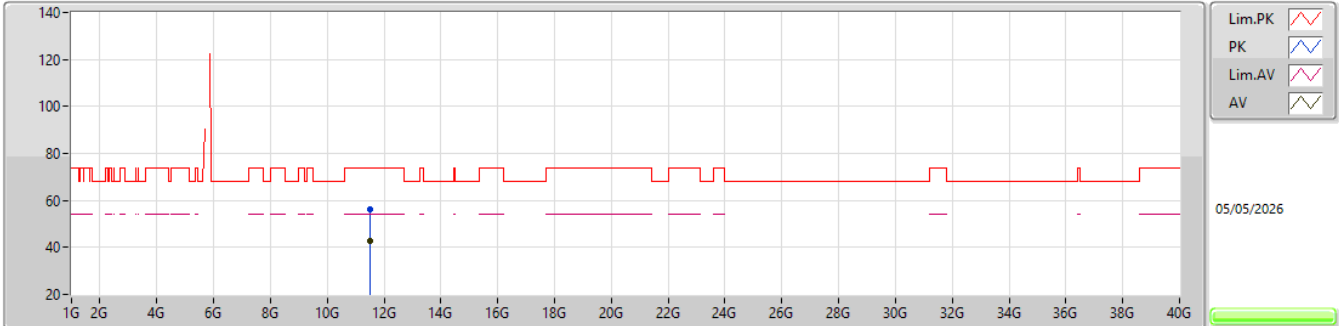


EUT_V_1TX
Setting 9.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.48752G	56.13	74.00	-17.87	41.41	3	Horizontal	180	2.84	-	39.08	10.74	35.10			
AV	11.48751G	42.65	54.00	-11.35	27.93	3	Horizontal	180	2.84	-	39.08	10.74	35.10			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5745MHz_TX

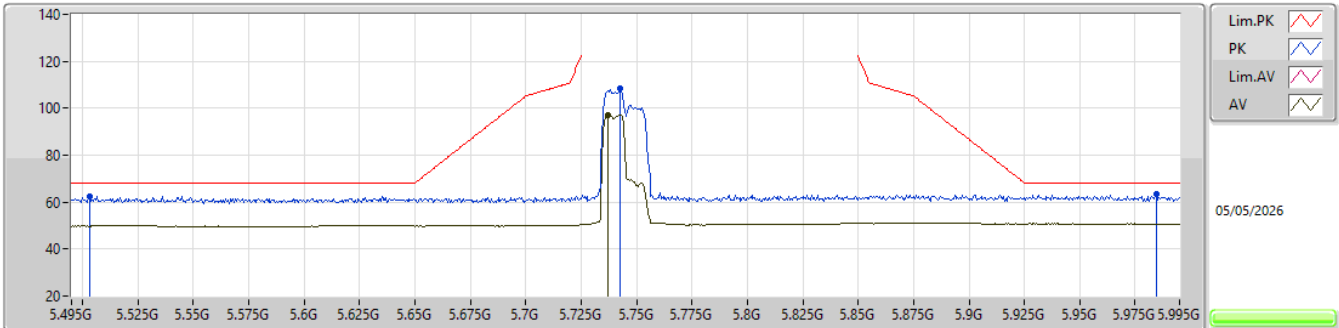


EUT_Y_1TX
Setting 12.5
03-D-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.503G	62.58	68.20	-5.62	55.47	3	Vertical	28	1.80	-	34.69	7.28	34.86
PK	5.7425G	108.52	Inf	-Inf	101.69	3	Vertical	28	1.80	-	34.30	7.46	34.93
AV	5.737G	97.17	Inf	-Inf	90.34	3	Vertical	28	1.80	-	34.30	7.46	34.93
PK	5.9845G	63.30	68.20	-4.90	56.01	3	Vertical	28	1.80	-	34.77	7.53	35.01

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5745MHz_TX

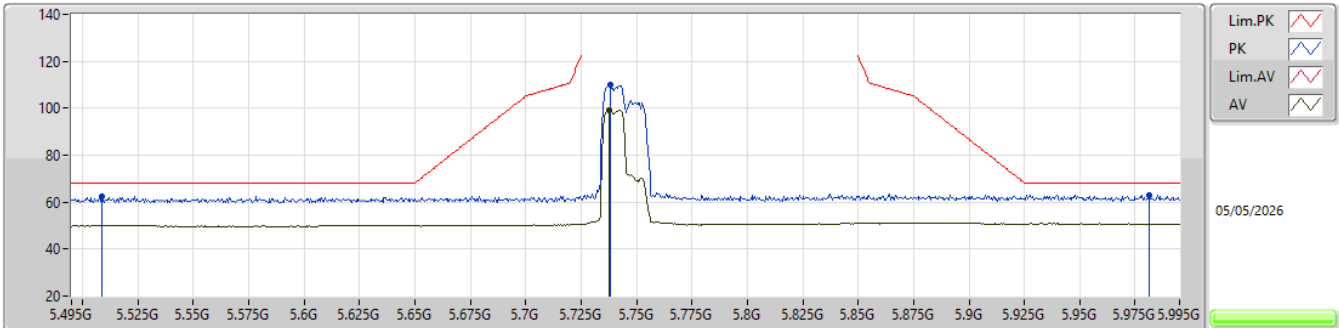


EUT_Y_1TX
Setting 12.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.5085G	62.49	68.20	-5.71	55.40	3	Horizontal	188	1.80	-	34.67	7.28	34.86				
PK	5.738G	109.87	Inf	-Inf	103.04	3	Horizontal	188	1.80	-	34.30	7.46	34.93				
AV	5.7375G	99.15	Inf	-Inf	92.32	3	Horizontal	188	1.80	-	34.30	7.46	34.93				
PK	5.9815G	63.17	68.20	-5.03	55.88	3	Horizontal	188	1.80	-	34.76	7.53	35.00				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX

5745MHz_TX

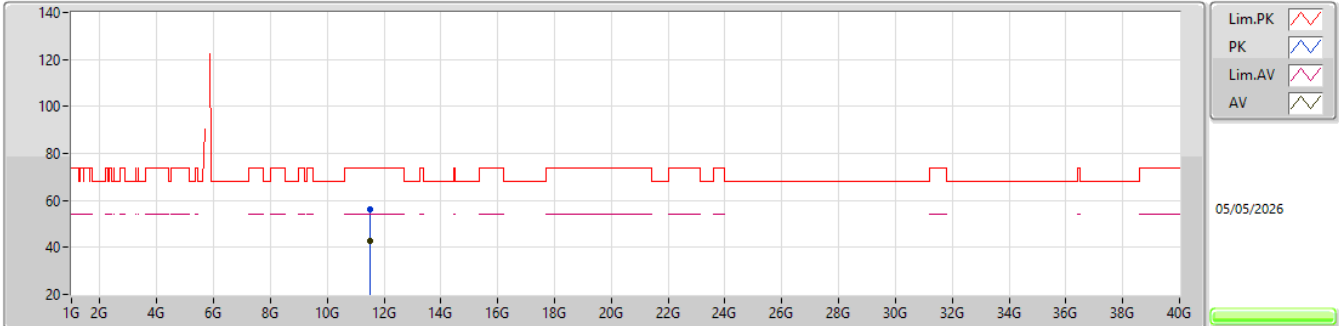


EUT_Y_1TX
Setting 12.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.4903G	56.12	74.00	-17.88	41.40	3	Vertical	304	1.98	-	39.08	10.74	35.10			
AV	11.48751G	42.65	54.00	-11.35	27.93	3	Vertical	304	1.98	-	39.08	10.74	35.10			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU53_1TX


5745MHz_TX

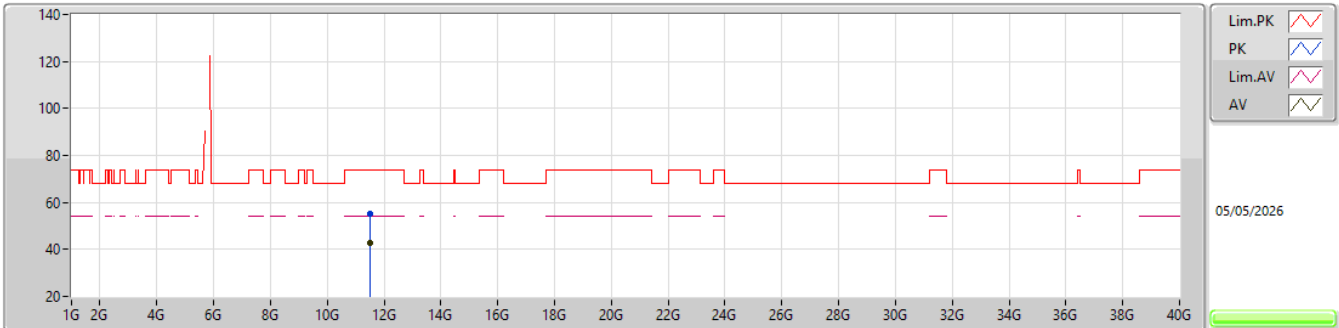EUT_Y_1TX
Setting 12.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.49142G	55.32	74.00	-18.68	40.60	3	Horizontal	359	2.48	-	39.08	10.74	35.10			
AV	11.48753G	42.65	54.00	-11.35	27.93	3	Horizontal	359	2.48	-	39.08	10.74	35.10			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5745MHz_TX

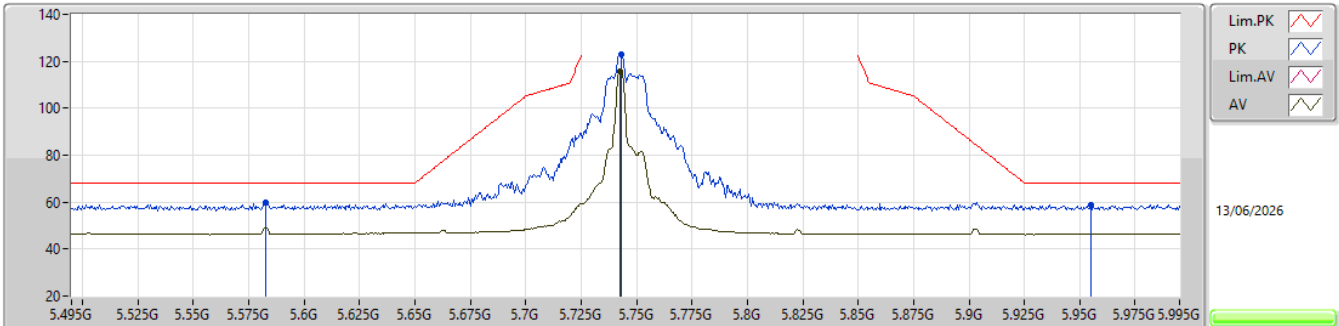EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.5825G	59.77	68.20	-8.43	52.74	3	Vertical	218	2.56	-	34.57	7.34	34.88			
PK	5.743G	122.90	Inf	-Inf	116.07	3	Vertical	218	2.56	-	34.30	7.46	34.93			
AV	5.7425G	115.65	Inf	-Inf	108.82	3	Vertical	218	2.56	-	34.30	7.46	34.93			
PK	5.955G	58.99	68.20	-9.21	51.75	3	Vertical	218	2.56	-	34.71	7.53	35.00			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5745MHz_TX

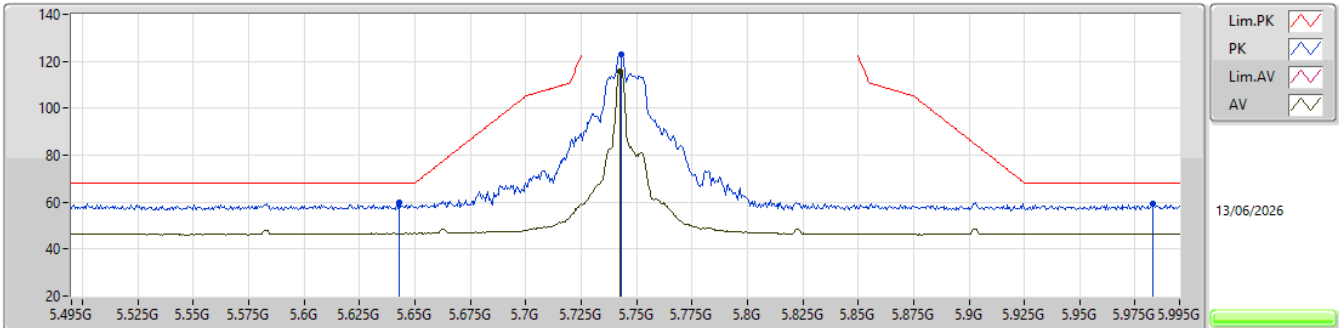EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.643G	59.68	68.20	-8.52	52.69	3	Horizontal	164	1.80	-	34.51	7.38	34.90			
PK	5.743G	122.95	Inf	-Inf	116.12	3	Horizontal	164	1.80	-	34.30	7.46	34.93			
AV	5.7425G	115.70	Inf	-Inf	108.87	3	Horizontal	164	1.80	-	34.30	7.46	34.93			
PK	5.983G	59.42	68.20	-8.78	52.12	3	Horizontal	164	1.80	-	34.77	7.53	35.00			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5745MHz_TX

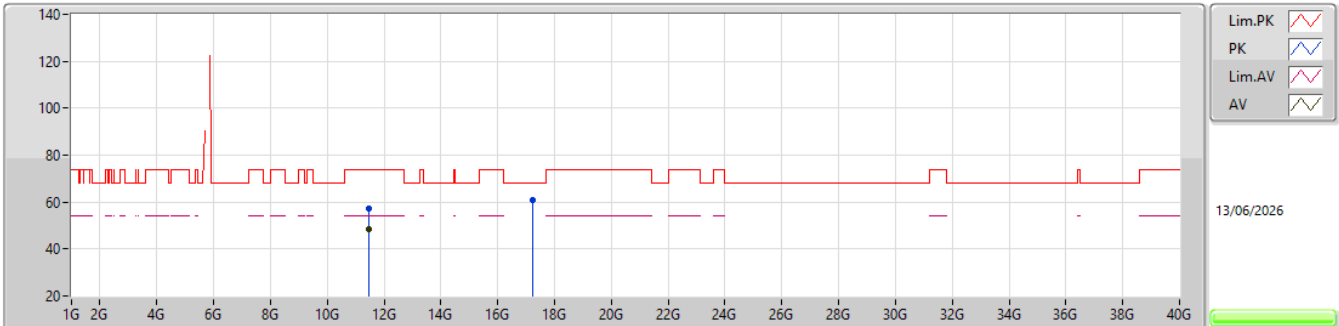EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4855G	57.33	74.00	-16.67	73.86	3	Vertical	150	1.62	-	39.07	10.74	66.34			
AV	11.48538G	48.67	54.00	-5.33	65.20	3	Vertical	150	1.62	-	39.07	10.74	66.34			
PK	17.2295G	60.93	68.20	-7.27	71.25	3	Vertical	218	1.80	-	40.72	12.93	63.97			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5745MHz_TX

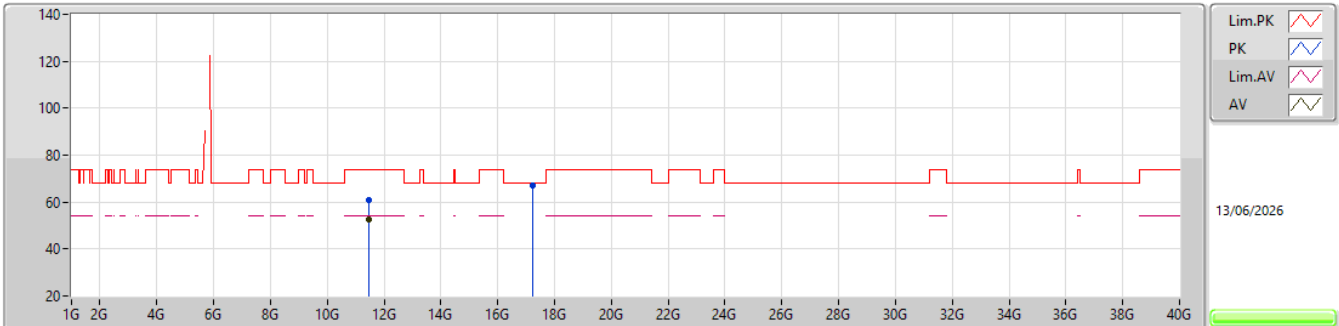EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48452G	60.99	74.00	-13.01	77.52	3	Horizontal	185	1.68	-	39.07	10.74	66.34			
AV	11.48538G	52.37	54.00	-1.63	68.90	3	Horizontal	185	1.68	-	39.07	10.74	66.34			
PK	17.22723G	66.93	68.20	-1.27	77.26	3	Horizontal	219	1.87	-	40.71	12.93	63.97			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5745MHz_TX

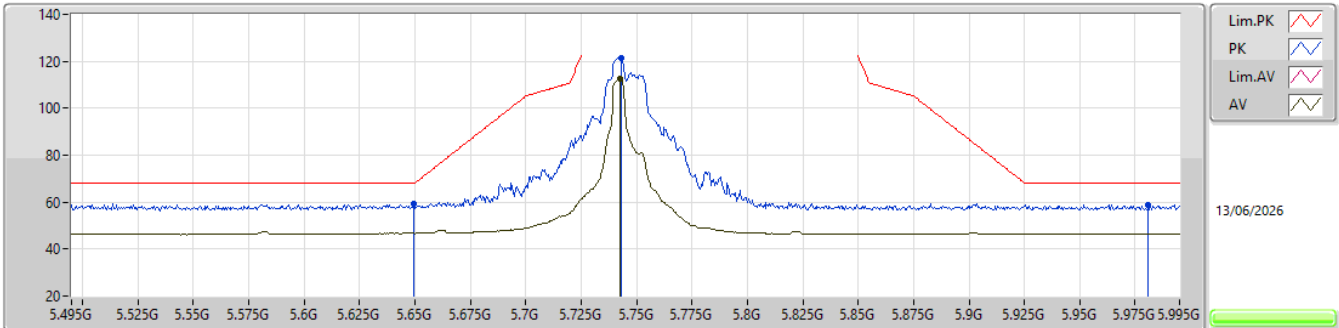EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.6495G	59.37	68.20	-8.83	52.38	3	Vertical	214	2.65	-	34.50	7.39	34.90
PK	5.743G	121.55	Inf	-Inf	114.72	3	Vertical	214	2.65	-	34.30	7.46	34.93
AV	5.7425G	112.36	Inf	-Inf	105.53	3	Vertical	214	2.65	-	34.30	7.46	34.93
PK	5.981G	58.76	68.20	-9.44	51.47	3	Vertical	214	2.65	-	34.76	7.53	35.00

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5745MHz_TX

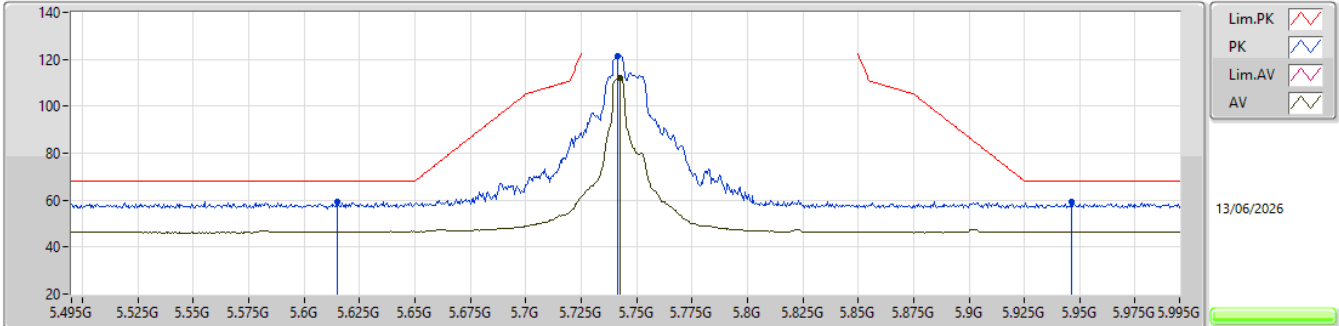


EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.615G	59.17	68.20	-9.03	52.13	3	Horizontal	165	1.80	-	34.57	7.36	34.89			
PK	5.7415G	121.63	Inf	-Inf	114.80	3	Horizontal	165	1.80	-	34.30	7.46	34.93			
AV	5.7425G	112.16	Inf	-Inf	105.33	3	Horizontal	165	1.80	-	34.30	7.46	34.93			
PK	5.946G	59.09	68.20	-9.11	51.87	3	Horizontal	165	1.80	-	34.69	7.52	34.99			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5745MHz_TX

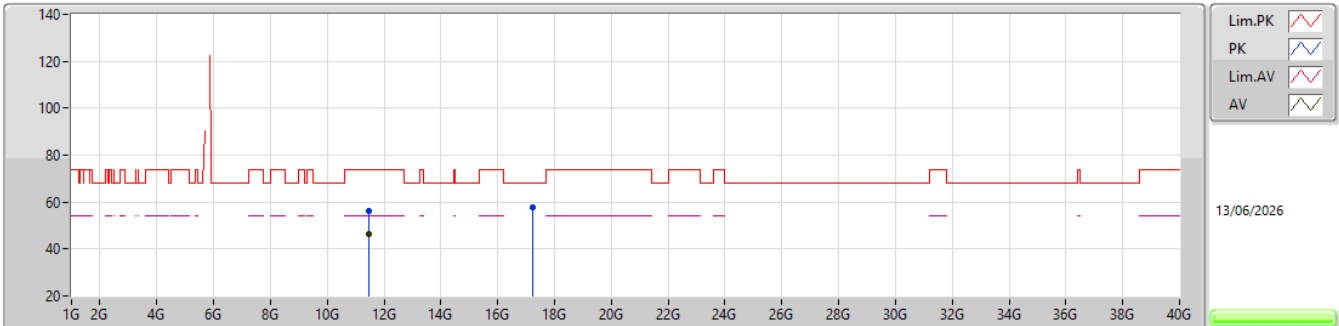EUT_Y_1TX
Setting 28
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48365G	56.45	74.00	-17.55	72.97	3	Vertical	144	2.15	-	39.07	10.74	66.33			
AV	11.4837G	46.34	54.00	-7.66	62.86	3	Vertical	144	2.15	-	39.07	10.74	66.33			
PK	17.2232G	58.00	68.20	-10.20	68.34	3	Vertical	217	1.80	-	40.69	12.93	63.96			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5745MHz_TX

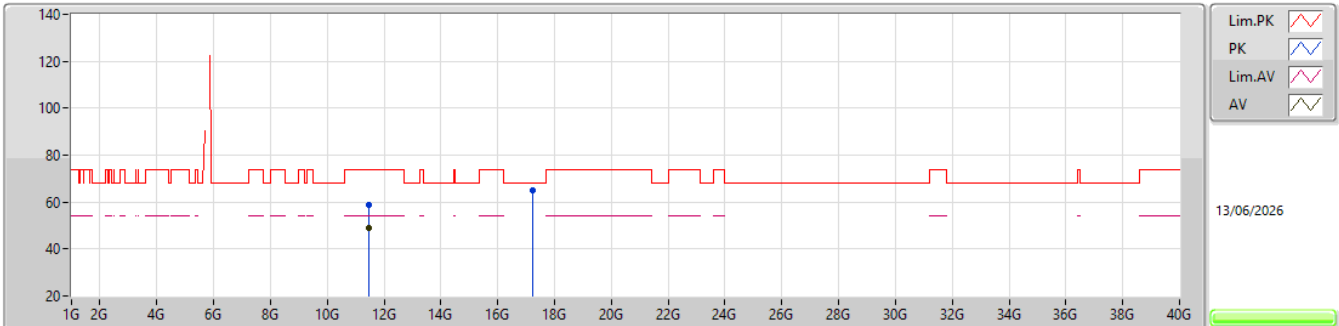EUT_Y_1TX
Setting 28
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4861G	59.02	74.00	-14.98	75.55	3	Horizontal	188	1.75	-	39.07	10.74	66.34			
AV	11.4835G	49.22	54.00	-4.78	65.74	3	Horizontal	188	1.75	-	39.07	10.74	66.33			
PK	17.22325G	64.91	68.20	-3.29	75.25	3	Horizontal	218	1.87	-	40.69	12.93	63.96			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5745MHz_TX

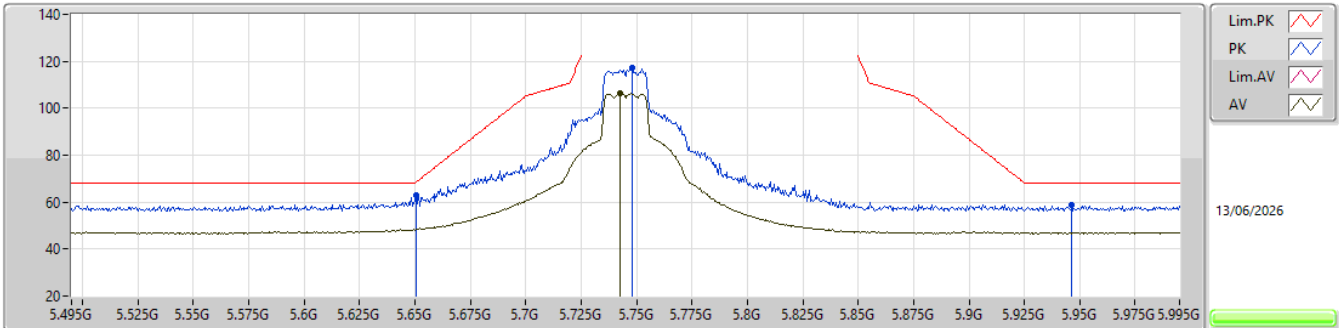


EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6505G	62.74	68.57	-5.83	55.76	3	Vertical	211	1.93	-	34.50	7.39	34.91				
PK	5.748G	117.12	Inf	-Inf	110.28	3	Vertical	211	1.93	-	34.30	7.47	34.93				
AV	5.7425G	106.26	Inf	-Inf	99.43	3	Vertical	211	1.93	-	34.30	7.46	34.93				
PK	5.9465G	58.74	68.20	-9.46	51.52	3	Vertical	211	1.93	-	34.69	7.52	34.99				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5745MHz_TX

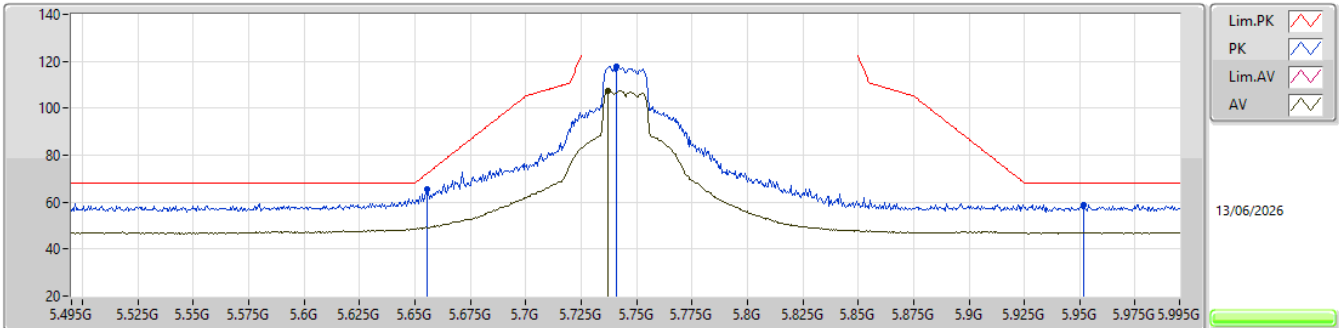EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6555G	65.72	72.27	-6.55	58.76	3	Horizontal	164.4	1.86	-	34.48	7.39	34.91			
PK	5.741G	117.86	Inf	-Inf	111.03	3	Horizontal	164.4	1.86	-	34.30	7.46	34.93			
AV	5.737G	107.58	Inf	-Inf	100.75	3	Horizontal	164.4	1.86	-	34.30	7.46	34.93			
PK	5.9515G	58.85	68.20	-9.35	51.62	3	Horizontal	164.4	1.86	-	34.70	7.53	35.00			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5745MHz_TX

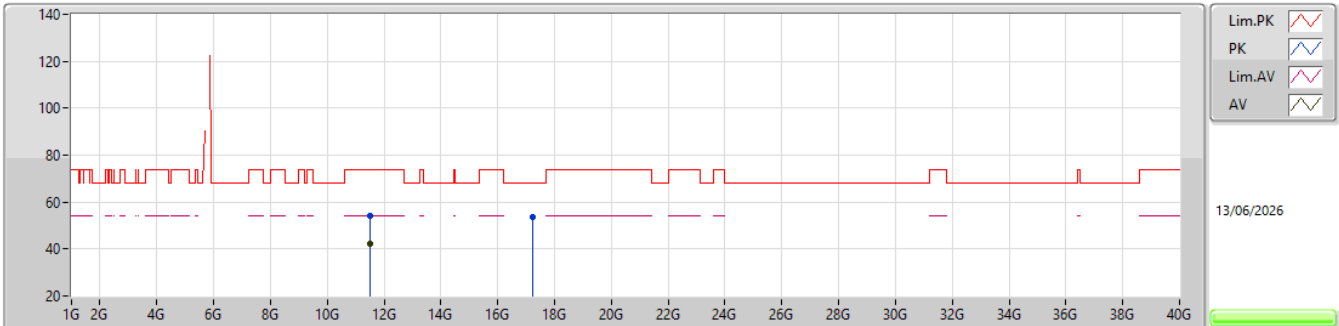EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49025G	54.25	74.00	-19.75	70.77	3	Vertical	138	2.12	-	39.08	10.74	66.34			
AV	11.49045G	42.24	54.00	-11.76	58.76	3	Vertical	138	2.12	-	39.08	10.74	66.34			
PK	17.2274G	53.37	68.20	-14.83	63.70	3	Vertical	218.2	1.80	-	40.71	12.93	63.97			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5745MHz_TX

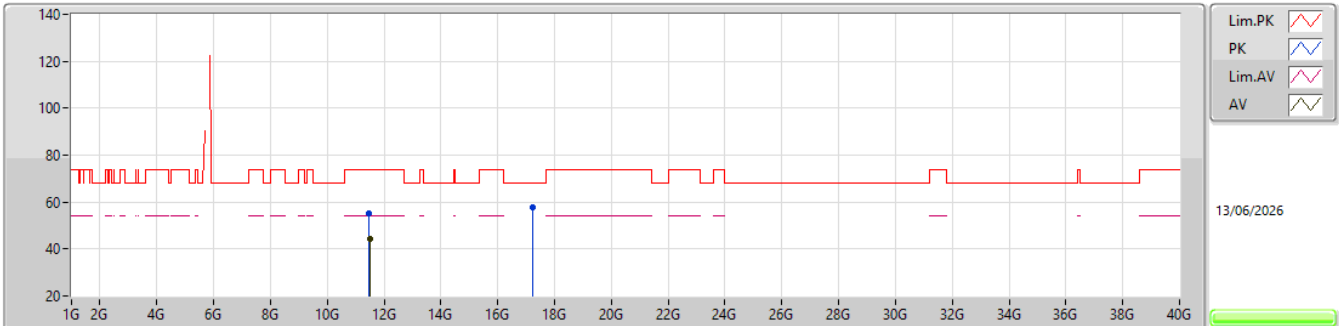EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4868G	55.04	74.00	-18.96	71.57	3	Horizontal	188	1.80	-	39.07	10.74	66.34			
AV	11.49G	44.48	54.00	-9.52	61.00	3	Horizontal	188	1.80	-	39.08	10.74	66.34			
PK	17.23815G	57.72	68.20	-10.48	68.01	3	Horizontal	219	1.89	-	40.75	12.94	63.98			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5825MHz_TX

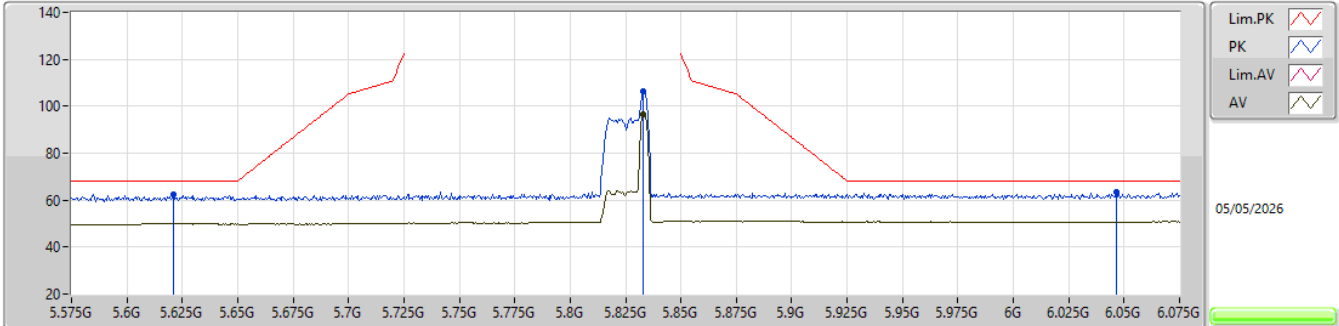


EUT_Y_1TX
Setting 7.5
03-D-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.621G	62.49	68.20	-5.71	55.46	3	Vertical	28	2.59	-	34.56	7.37	34.90			
PK	5.833G	106.31	Inf	-Inf	99.36	3	Vertical	28	2.59	-	34.40	7.51	34.96			
AV	5.833G	96.43	Inf	-Inf	89.48	3	Vertical	28	2.59	-	34.40	7.51	34.96			
PK	6.0465G	63.21	68.20	-4.99	55.66	3	Vertical	28	2.59	-	34.99	7.58	35.02			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5825MHz_TX

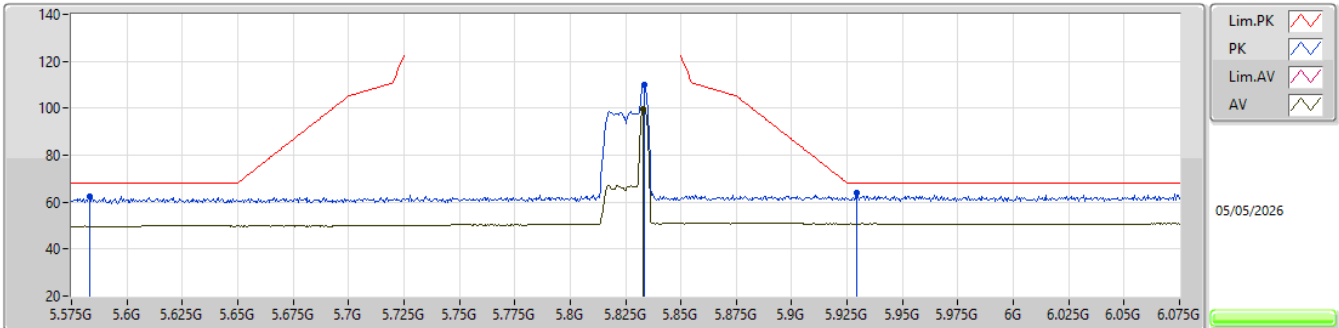


EUT_Y_1TX
Setting 7.5
03-D-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.583G	62.43	68.20	-5.77	55.40	3	Horizontal	182	1.80	-	34.57	7.34	34.88			
PK	5.8335G	110.04	Inf	-Inf	103.09	3	Horizontal	182	1.80	-	34.40	7.51	34.96			
AV	5.833G	99.81	Inf	-Inf	92.86	3	Horizontal	182	1.80	-	34.40	7.51	34.96			
PK	5.9295G	63.92	68.20	-4.28	56.73	3	Horizontal	182	1.80	-	34.66	7.52	34.99			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX

5825MHz_TX

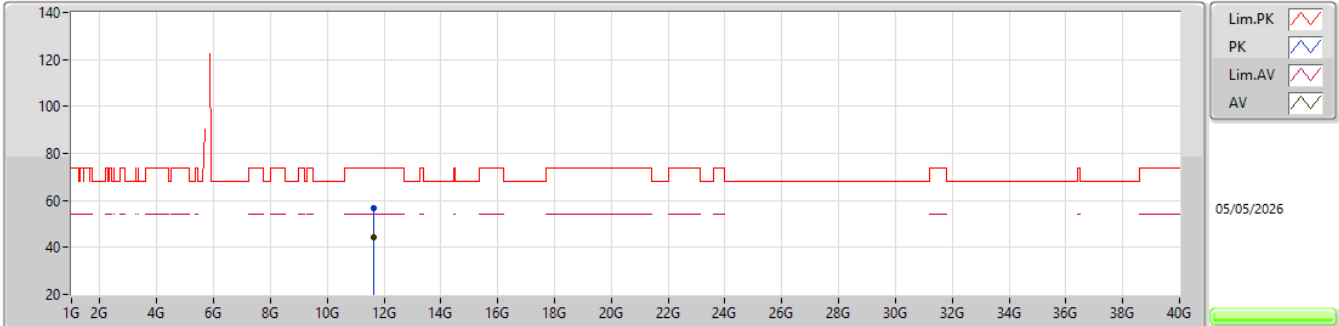


EUT_V_1TX
Setting 7.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.64826G	56.80	74.00	-17.20	41.63	3	Vertical	33	1.83	-	39.50	10.80	35.13			
AV	11.6497G	44.09	54.00	-9.91	28.92	3	Vertical	33	1.83	-	39.50	10.80	35.13			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU8_1TX


5825MHz_TX

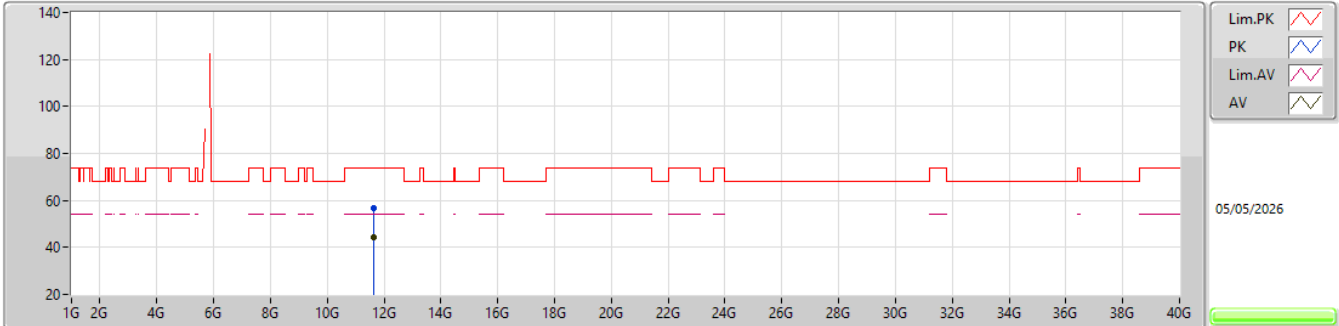EUT_V_1TX
Setting 7.5
03-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.65092G	56.72	74.00	-17.28	41.55	3	Horizontal	107	1.78	-	39.50	10.80	35.13			
AV	11.64989G	44.09	54.00	-9.91	28.92	3	Horizontal	107	1.78	-	39.50	10.80	35.13			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5825MHz_TX

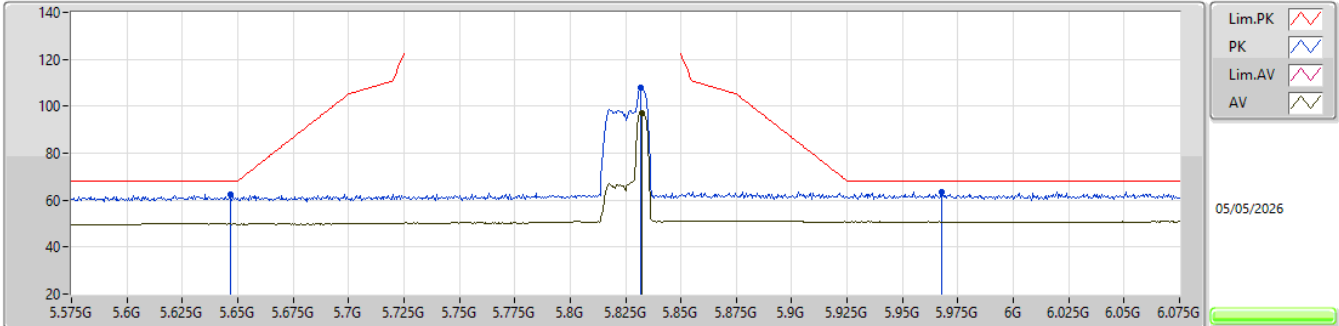


EUT_Y_1TX
Setting 10.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6465G	62.47	68.20	-5.73	55.47	3	Vertical	22	2.09	-	34.51	7.39	34.90				
PK	5.832G	107.78	Inf	-Inf	100.84	3	Vertical	22	2.09	-	34.39	7.51	34.96				
AV	5.8325G	97.09	Inf	-Inf	90.15	3	Vertical	22	2.09	-	34.39	7.51	34.96				
PK	5.9675G	63.68	68.20	-4.52	56.41	3	Vertical	22	2.09	-	34.74	7.53	35.00				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5825MHz_TX

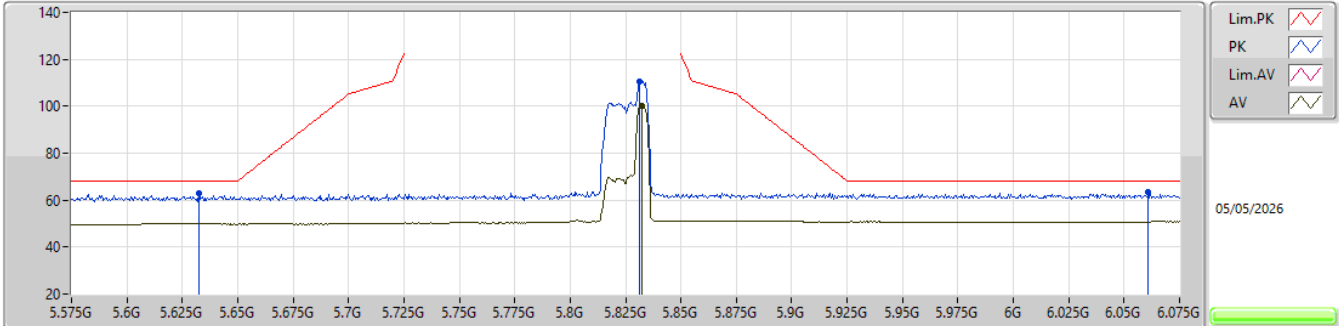


EUT_Y_1TX
Setting 10.5
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6325G	62.94	68.20	-5.26	55.93	3	Horizontal	185	1.79	-	34.53	7.38	34.90				
PK	5.8315G	110.46	Inf	-Inf	103.52	3	Horizontal	185	1.79	-	34.39	7.51	34.96				
AV	5.8325G	100.16	Inf	-Inf	93.22	3	Horizontal	185	1.79	-	34.39	7.51	34.96				
PK	6.061G	63.58	68.20	-4.62	55.98	3	Horizontal	185	1.79	-	35.02	7.60	35.02				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5825MHz_TX

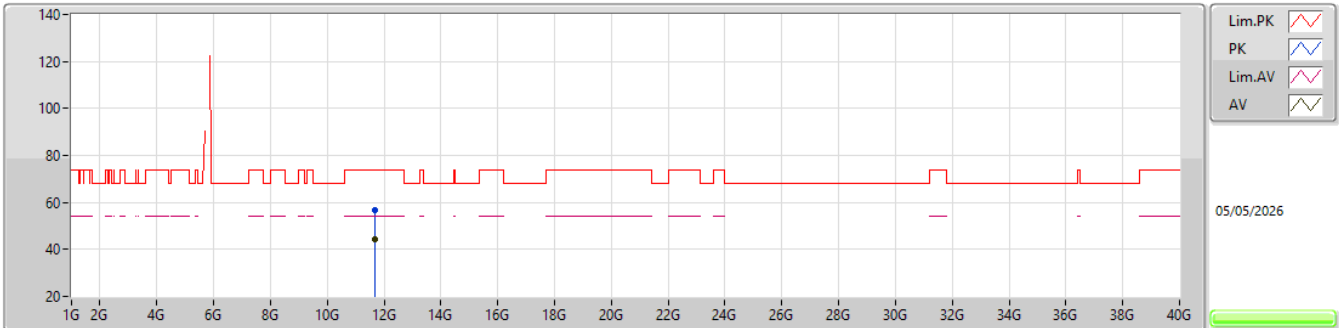


EUT_V_1TX
Setting 10.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.6602G	56.94	74.00	-17.06	41.77	3	Vertical	95	1.40	-	39.50	10.80	35.13			
AV	11.66029G	44.20	54.00	-9.80	29.03	3	Vertical	95	1.40	-	39.50	10.80	35.13			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU40_1TX

5825MHz_TX

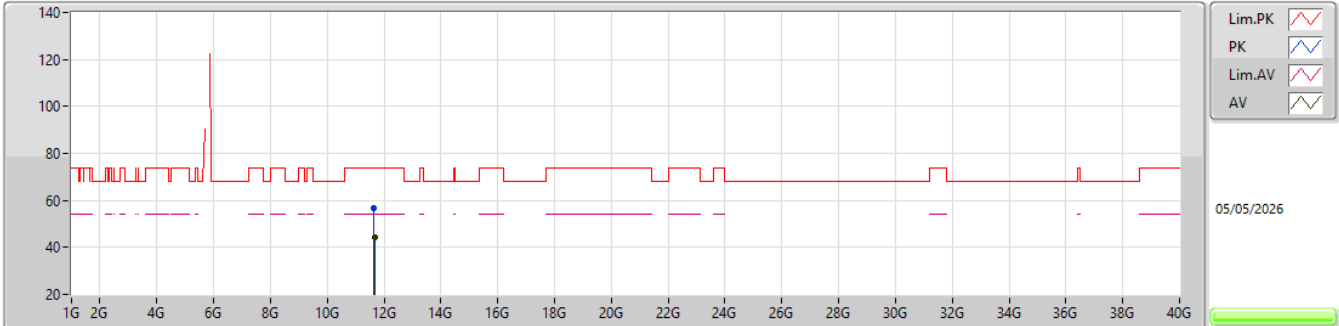


EUT_V_1TX
Setting 10.5
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.65516G	56.62	74.00	-17.38	41.45	3	Horizontal	189	1.46	-	39.50	10.80	35.13			
AV	11.66068G	44.20	54.00	-9.80	29.03	3	Horizontal	189	1.46	-	39.50	10.80	35.13			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5825MHz_TX

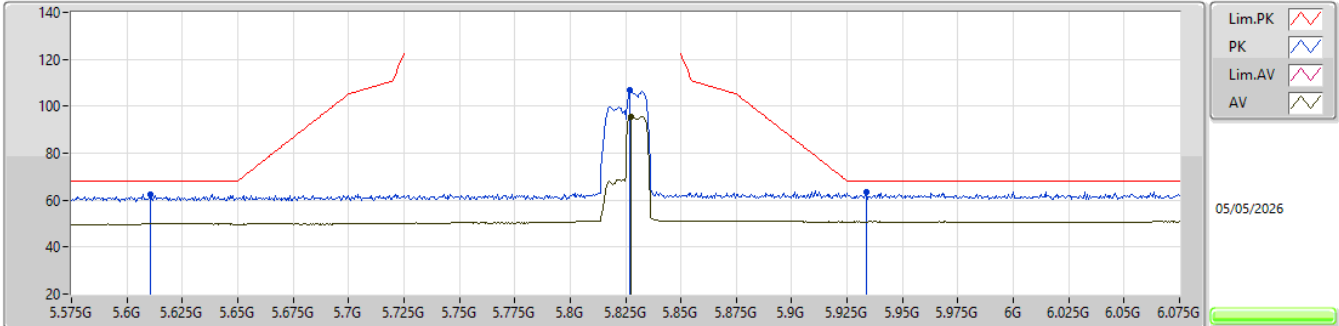


EUT_Y_1TX
Setting 13
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6105G	62.60	68.20	-5.60	55.55	3	Vertical	21	2.54	-	34.58	7.36	34.89				
PK	5.827G	106.69	Inf	-Inf	99.78	3	Vertical	21	2.54	-	34.36	7.51	34.96				
AV	5.8275G	95.64	Inf	-Inf	88.72	3	Vertical	21	2.54	-	34.37	7.51	34.96				
PK	5.9335G	63.69	68.20	-4.51	56.49	3	Vertical	21	2.54	-	34.67	7.52	34.99				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5825MHz_TX

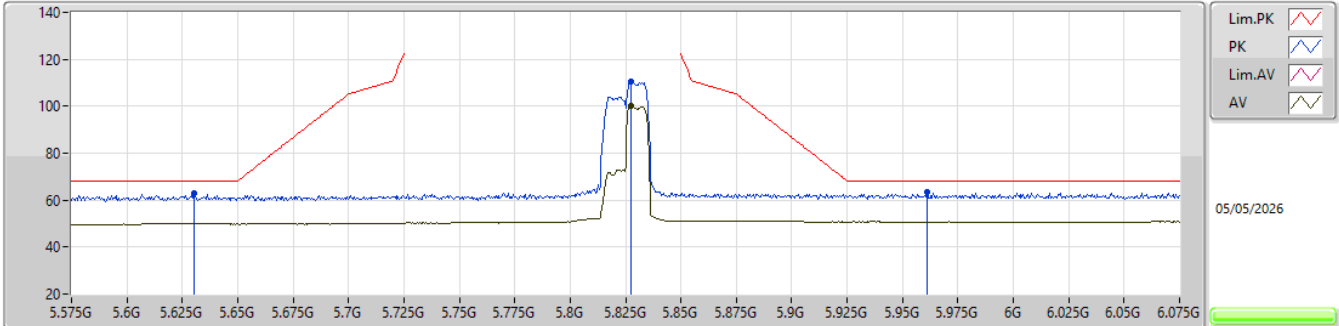


EUT_Y_1TX
Setting 13
03-D-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6305G	62.68	68.20	-5.52	55.67	3	Horizontal	186	1.80	-	34.54	7.37	34.90			
PK	5.8275G	110.63	Inf	-Inf	103.71	3	Horizontal	186	1.80	-	34.37	7.51	34.96			
AV	5.8275G	100.04	Inf	-Inf	93.12	3	Horizontal	186	1.80	-	34.37	7.51	34.96			
PK	5.961G	63.35	68.20	-4.85	56.10	3	Horizontal	186	1.80	-	34.72	7.53	35.00			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5825MHz_TX

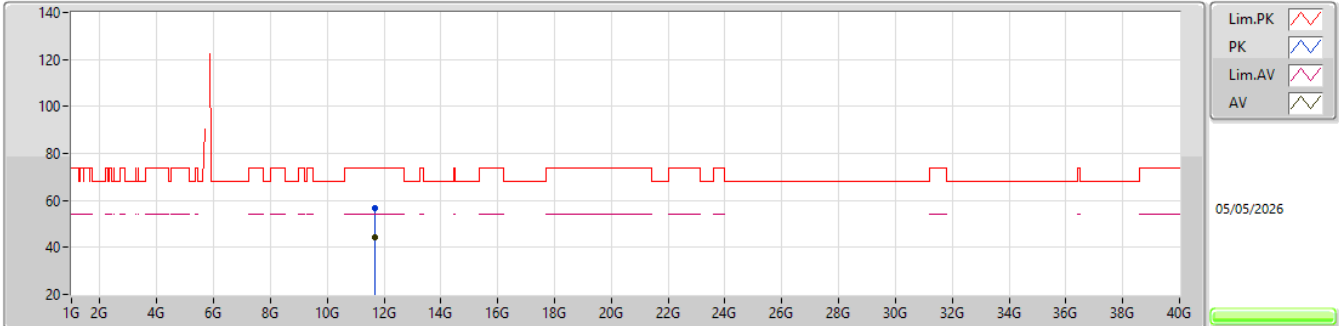


EUT_V_1TX
Setting 13
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.66431G	56.80	74.00	-17.20	41.63	3	Vertical	107	1.94	-	39.50	10.80	35.13			
AV	11.65819G	44.28	54.00	-9.72	29.11	3	Vertical	107	1.94	-	39.50	10.80	35.13			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU106,#RU54_1TX

5825MHz_TX

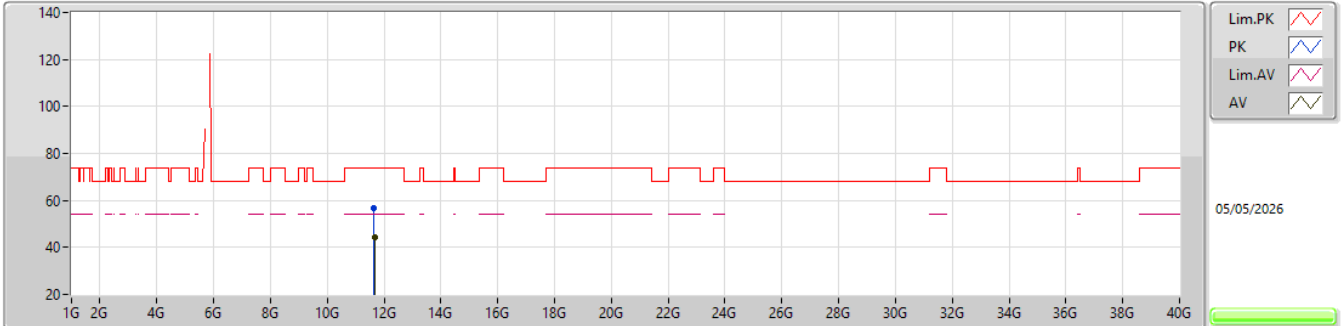


EUT_V_1TX
Setting 13
03-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.63548G	56.48	74.00	-17.52	41.34	3	Horizontal	100	1.04	-	39.47	10.79	35.12			
AV	11.66479G	44.26	54.00	-9.74	29.09	3	Horizontal	100	1.04	-	39.50	10.80	35.13			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5825MHz_TX

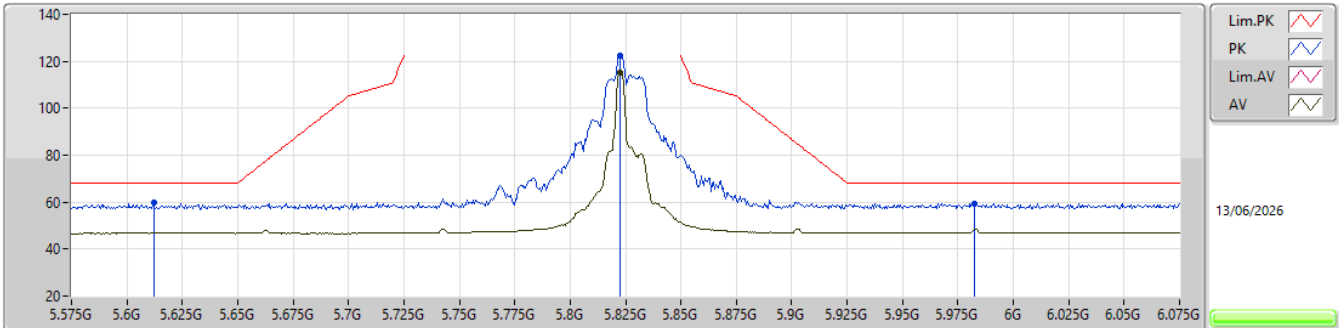EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.612G	59.84	68.20	-8.36	52.79	3	Vertical	210	1.91	-	34.58	7.36	34.89			
PK	5.8225G	122.50	Inf	-Inf	115.61	3	Vertical	210	1.91	-	34.34	7.51	34.96			
AV	5.8225G	114.97	Inf	-Inf	108.08	3	Vertical	210	1.91	-	34.34	7.51	34.96			
PK	5.9825G	59.50	68.20	-8.70	52.21	3	Vertical	210	1.91	-	34.76	7.53	35.00			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX

5825MHz_TX

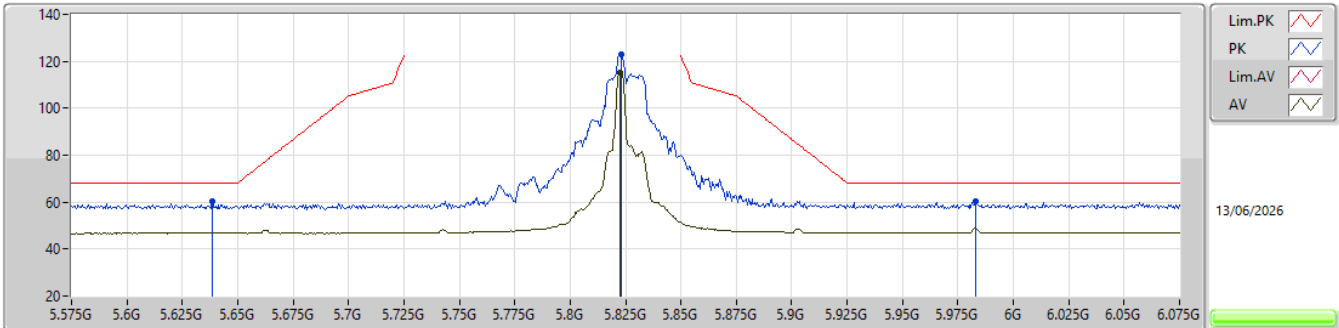


EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6385G	60.11	68.20	-8.09	53.11	3	Horizontal	156	1.80	-	34.52	7.38	34.90				
PK	5.823G	122.83	Inf	-Inf	115.94	3	Horizontal	156	1.80	-	34.34	7.51	34.96				
AV	5.8225G	115.19	Inf	-Inf	108.30	3	Horizontal	156	1.80	-	34.34	7.51	34.96				
PK	5.983G	60.56	68.20	-7.64	53.26	3	Horizontal	156	1.80	-	34.77	7.53	35.00				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5825MHz_TX

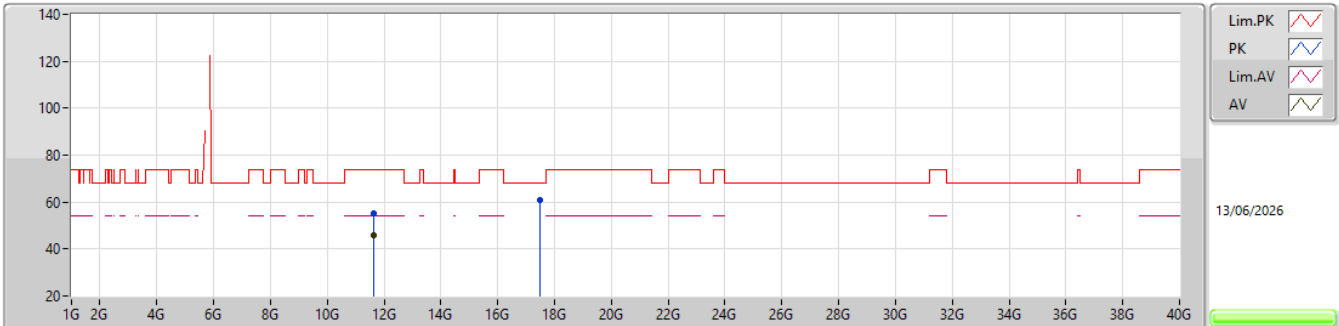EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64649G	55.09	74.00	-18.91	71.22	3	Vertical	18	1.53	-	39.49	10.80	66.42			
AV	11.64539G	45.76	54.00	-8.24	61.90	3	Vertical	18	1.53	-	39.49	10.79	66.42			
PK	17.46728G	60.71	68.20	-7.49	69.75	3	Vertical	216	1.83	-	42.24	13.04	64.32			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU26,#RU3_1TX


5825MHz_TX

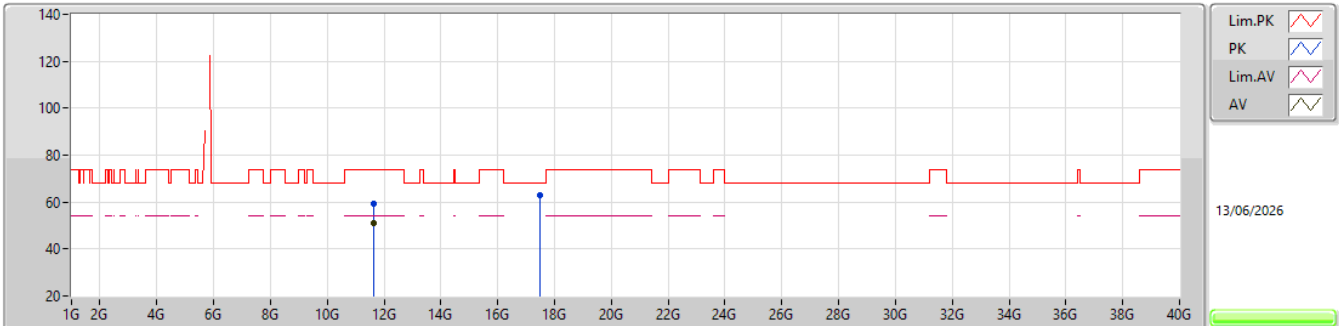EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64486G	59.30	74.00	-14.70	75.44	3	Horizontal	242	1.78	-	39.49	10.79	66.42			
AV	11.64541G	50.89	54.00	-3.11	67.03	3	Horizontal	242	1.78	-	39.49	10.79	66.42			
PK	17.46806G	62.78	68.20	-5.42	71.82	3	Horizontal	220.7	1.80	-	42.24	13.04	64.32			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5825MHz_TX

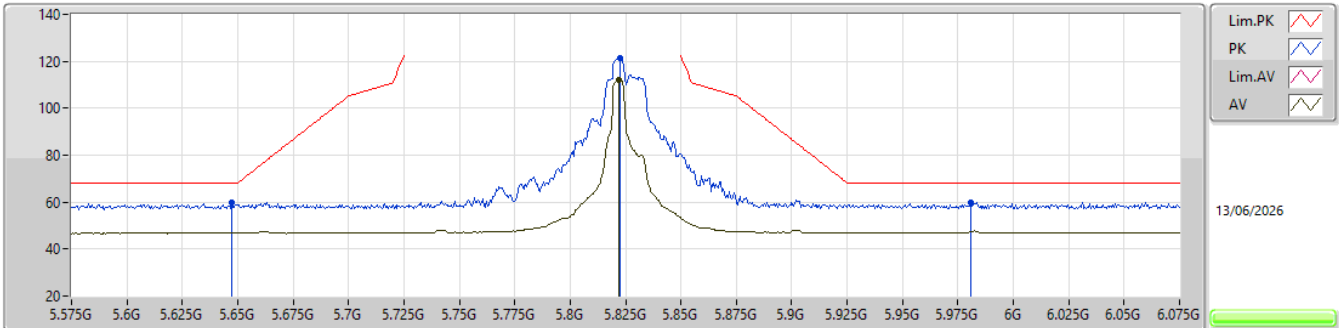


EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6475G	60.04	68.20	-8.16	53.04	3	Vertical	212	1.79	-	34.51	7.39	34.90				
PK	5.8225G	121.23	Inf	-Inf	114.34	3	Vertical	212	1.79	-	34.34	7.51	34.96				
AV	5.822G	111.98	Inf	-Inf	105.10	3	Vertical	212	1.79	-	34.33	7.51	34.96				
PK	5.981G	60.01	68.20	-8.19	52.72	3	Vertical	212	1.79	-	34.76	7.53	35.00				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX

5825MHz_TX

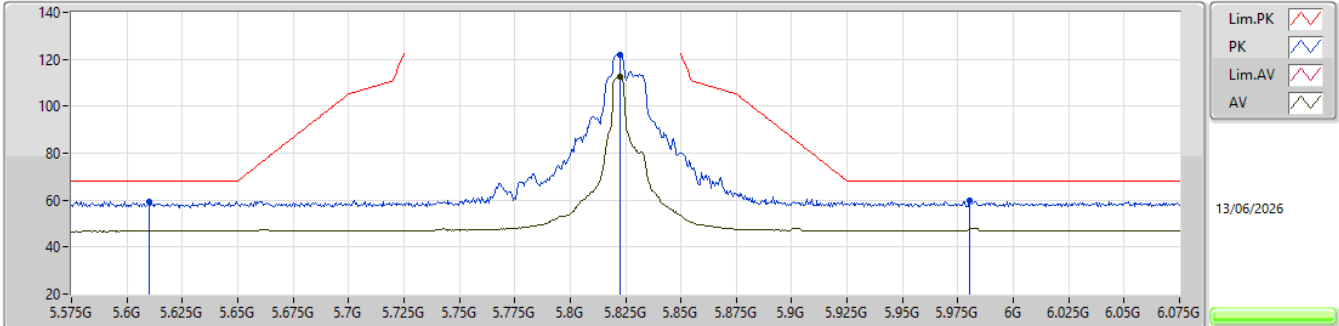


EUT_Y_1TX
Setting 28
03-Y-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.61G	59.53	68.20	-8.67	52.48	3	Horizontal	156	1.98	-	34.58	7.36	34.89				
PK	5.8225G	122.10	Inf	-Inf	115.21	3	Horizontal	156	1.98	-	34.34	7.51	34.96				
AV	5.8225G	112.68	Inf	-Inf	105.79	3	Horizontal	156	1.98	-	34.34	7.51	34.96				
PK	5.98G	59.59	68.20	-8.61	52.30	3	Horizontal	156	1.98	-	34.76	7.53	35.00				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5825MHz_TX

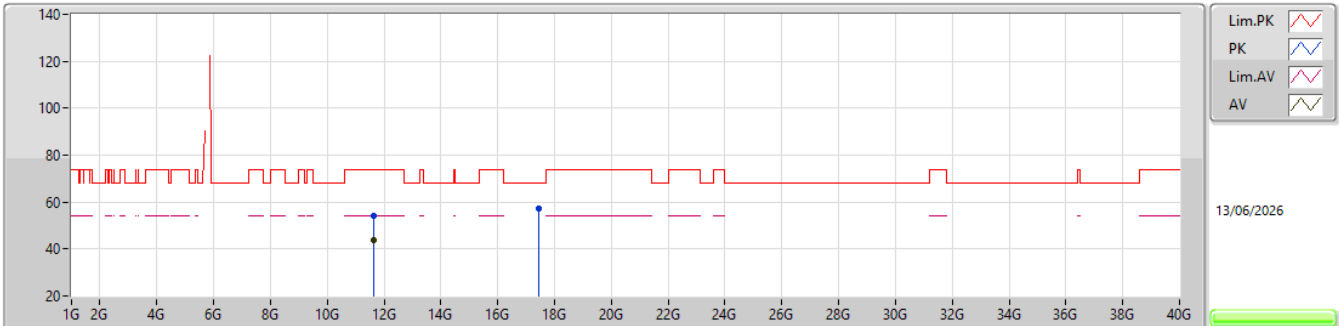EUT_Y_1TX
Setting 28
03-Y-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.6434G	54.08	74.00	-19.92	70.22	3	Vertical	22	2.05	-	39.49	10.79	66.42			
AV	11.64345G	43.79	54.00	-10.21	59.93	3	Vertical	22	2.05	-	39.49	10.79	66.42			
PK	17.4655G	57.30	68.20	-10.90	66.36	3	Vertical	212	1.80	-	42.22	13.04	64.32			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU52,#RU38_1TX


5825MHz_TX

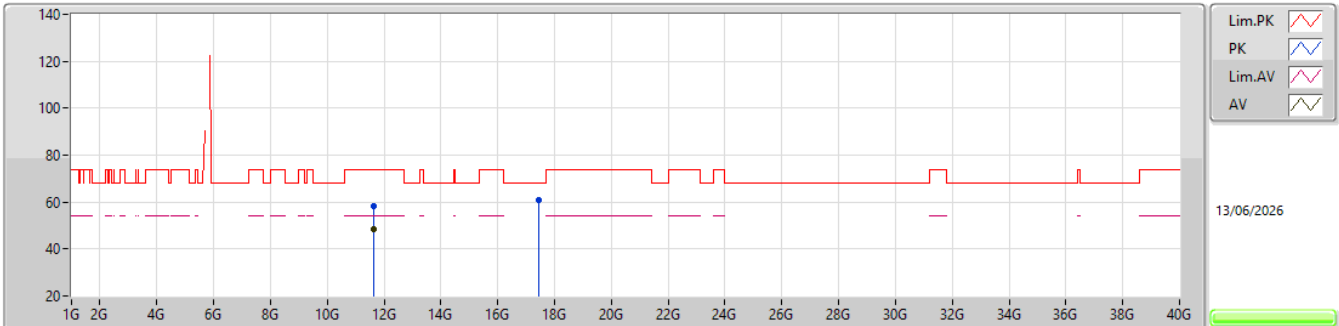EUT_Y_1TX
Setting 28
03-Y-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.64285G	58.51	74.00	-15.49	74.65	3	Horizontal	185	1.60	-	39.49	10.79	66.42			
AV	11.64345G	48.29	54.00	-5.71	64.43	3	Horizontal	185	1.60	-	39.49	10.79	66.42			
PK	17.4642G	61.06	68.20	-7.14	70.13	3	Horizontal	221	1.84	-	42.21	13.04	64.32			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5825MHz_TX

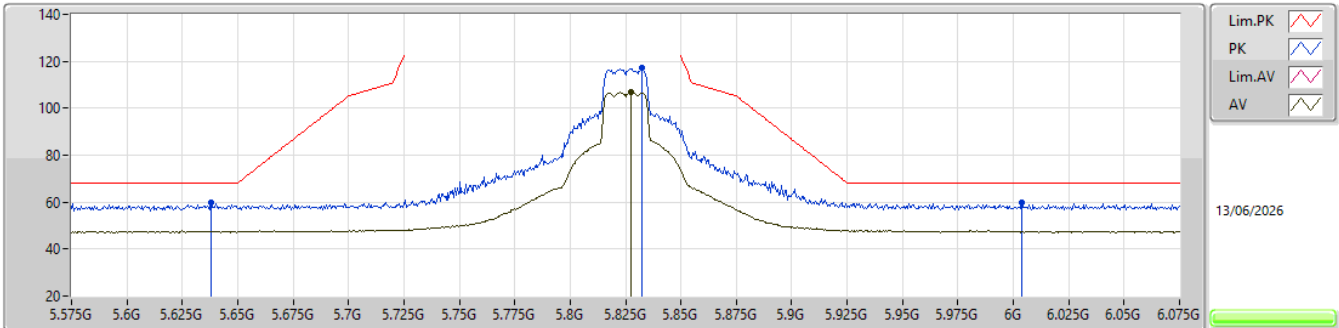EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.638G	59.83	68.20	-8.37	52.83	3	Vertical	215	2.59	-	34.52	7.38	34.90			
PK	5.8325G	117.22	Inf	-Inf	110.28	3	Vertical	215	2.59	-	34.39	7.51	34.96			
AV	5.8275G	106.68	Inf	-Inf	99.76	3	Vertical	215	2.59	-	34.37	7.51	34.96			
PK	6.004G	59.61	68.20	-8.59	52.27	3	Vertical	215	2.59	-	34.82	7.53	35.01			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5825MHz_TX

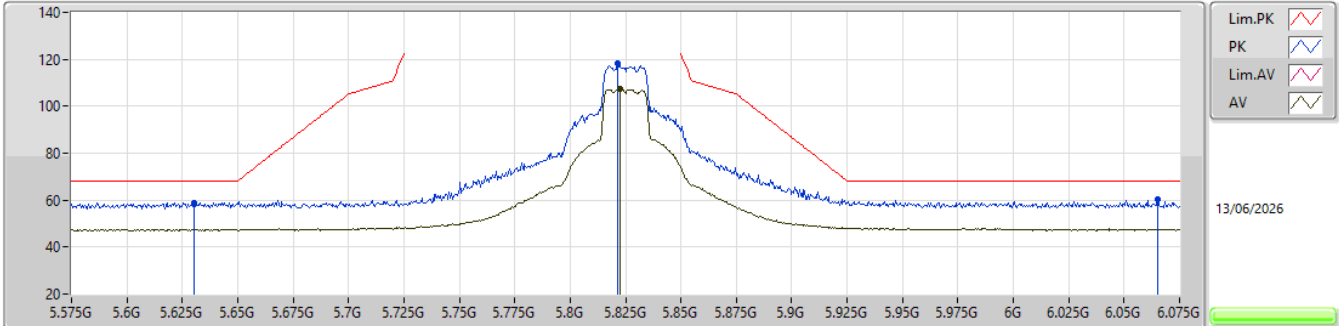


EUT_Y_1TX
Setting 28
03-Y-K-3-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6305G	58.89	68.20	-9.31	51.88	3	Horizontal	155	1.96	-	34.54	7.37	34.90			
PK	5.8215G	118.11	Inf	-Inf	111.23	3	Horizontal	155	1.96	-	34.33	7.51	34.96			
AV	5.8225G	107.49	Inf	-Inf	100.60	3	Horizontal	155	1.96	-	34.34	7.51	34.96			
PK	6.065G	60.44	68.20	-7.76	52.83	3	Horizontal	155	1.96	-	35.03	7.60	35.02			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX


5825MHz_TX

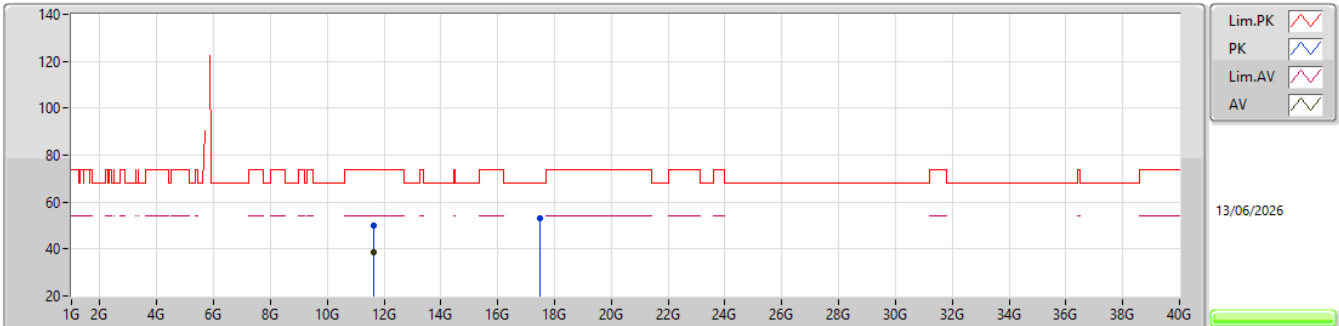EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.652G	49.98	74.00	-24.02	66.10	3	Vertical	18	1.50	-	39.50	10.80	66.42			
AV	11.65015G	38.46	54.00	-15.54	54.58	3	Vertical	18	1.50	-	39.50	10.80	66.42			
PK	17.4835G	53.10	68.20	-15.10	62.03	3	Vertical	216	1.80	-	42.37	13.05	64.35			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0),RU242,#RU61_1TX

5825MHz_TX

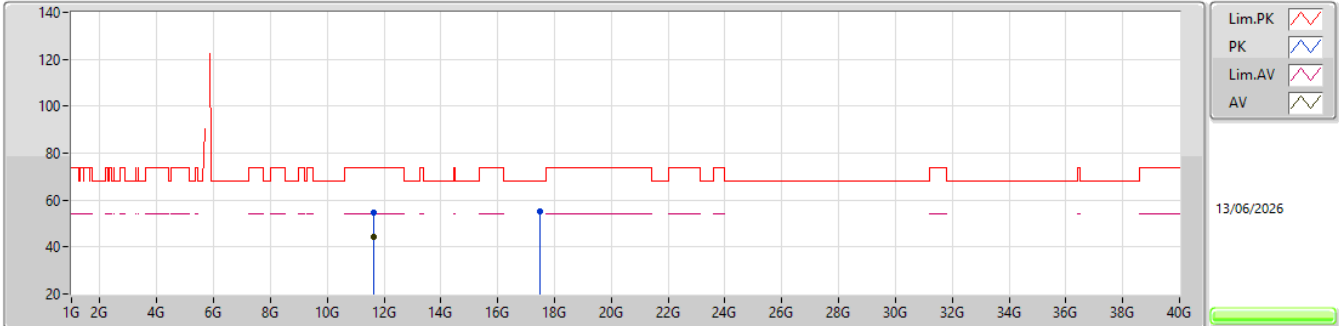EUT_Y_1TX
Setting 28
03-Y-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.65G	54.62	74.00	-19.38	70.74	3	Horizontal	240	1.76	-	39.50	10.80	66.42			
AV	11.6501G	44.28	54.00	-9.72	60.40	3	Horizontal	240	1.76	-	39.50	10.80	66.42			
PK	17.4686G	55.25	68.20	-12.95	64.28	3	Horizontal	222	1.84	-	42.25	13.04	64.32			