

FCC Radio Test Report

FCC ID : TOR-O405
Equipment : Wireless Access Point
Brand Name : ARISTA
Model Name : O-405 / O-405E
Applicant : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA 95054 USA
Manufacturer : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA 95054 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Jul. 21, 2025, and testing was started from Dec. 31, 2025 and completed on Feb. 26, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	14
1.3 Testing Location Information	14
1.4 Measurement Uncertainty	15
2 TEST CONFIGURATION OF EUT.....	16
2.1 Test Channel Mode	16
2.2 The Worst Case Measurement Configuration.....	22
2.3 Accessories	23
2.4 Support Equipment.....	23
2.5 Test Setup Diagram	23
3 TRANSMITTER TEST RESULT	24
3.1 Emission Bandwidth	24
3.2 Maximum Conducted Output Power	25
3.3 Peak Power Spectral Density.....	27
3.4 Unwanted Emissions.....	29
4 TEST EQUIPMENT AND CALIBRATION DATA.....	32
APPENDIX A. TEST RESULTS OF EMISSION BANDWIDTH	
APPENDIX B. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX C. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY	
APPENDIX D. TEST RESULTS OF UNWANTED EMISSIONS	
APPENDIX E. TEST RESULTS OF RADIATED EMISSION CO-LOCATION	
APPENDIX F. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	

[illegible]

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.4	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Emission Bandwidth	PASS	-
3.2	15.407(a)	Maximum Conducted Output Power	PASS	-
3.3	15.407(a)	Peak Power Spectral Density	PASS	-
3.4	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Barry Hsiao

Report Producer: Debby Hung

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20) , be(EHT20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5700	100-140 [11]
Straddle 5720		5720	144 [1]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40) , be(EHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5670	102-134 [5]
Straddle 5710		5710	142 [1]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80) , be(EHT80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5610	106-122 [2]
Straddle 5690		5690	138 [1]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160) , be(EHT160)	5250	50 [1]
5470-5725		5570	114 [1]

Non-Beamforming Full RU

Band	Mode	BWch	Nant
5.25-5.35GHz	802.11a	20	2TX
5.47-5.725GHz	802.11a	20	2TX
5.725-5.85GHz	802.11a	20	2TX
5.25-5.35GHz	802.11be EHT20	20	2TX
5.47-5.725GHz	802.11be EHT20	20	2TX
5.725-5.85GHz	802.11be EHT20	20	2TX
5.25-5.35GHz	802.11be EHT40	40	2TX
5.47-5.725GHz	802.11be EHT40	40	2TX
5.725-5.85GHz	802.11be EHT40	40	2TX
5.25-5.35GHz	802.11be EHT80	80	2TX
5.47-5.725GHz	802.11be EHT80	80	2TX
5.725-5.85GHz	802.11be EHT80	80	2TX
5.15-5.25GHz	802.11be EHT160	160	2TX



5.25-5.35GHz	802.11be EHT160	160	2TX
5.47-5.725GHz	802.11be EHT160	160	2TX

Non-Beamforming_Multi-RU

Band	Mode	BWch	Nant
5.15-5.25GHz	802.11be EHT80	80	2TX
5.25-5.35GHz	802.11be EHT80	80	2TX
5.47-5.725GHz	802.11be EHT80	80	2TX
5.725-5.85GHz	802.11be EHT80	80	2TX
5.15-5.25GHz	802.11be EHT160	160	2TX
5.47-5.725GHz	802.11be EHT160	160	2TX

Non-Beamforming_Puncturing

Band	Mode	BWch	Nant
5.15-5.25GHz	802.11be EHT80	80	2TX
5.25-5.35GHz	802.11be EHT80	80	2TX
5.47-5.725GHz	802.11be EHT80	80	2TX
5.725-5.85GHz	802.11be EHT80	80	2TX
5.15-5.25GHz	802.11be EHT160	160	2TX
5.25-5.35GHz	802.11be EHT160	160	2TX
5.47-5.725GHz	802.11be EHT160	160	2TX

Beamforming_Full RU




Band	Mode	BWch	Nant
5.25-5.35GHz	802.11be EHT20-BF	20	2TX
5.47-5.725GHz	802.11be EHT20-BF	20	2TX
5.725-5.85GHz	802.11be EHT20-BF	20	2TX
5.25-5.35GHz	802.11be EHT40-BF	40	2TX
5.47-5.725GHz	802.11be EHT40-BF	40	2TX
5.725-5.85GHz	802.11be EHT40-BF	40	2TX
5.25-5.35GHz	802.11be EHT80-BF	80	2TX
5.47-5.725GHz	802.11be EHT80-BF	80	2TX
5.725-5.85GHz	802.11be EHT80-BF	80	2TX
5.15-5.25GHz	802.11be EHT160-BF	160	2TX
5.25-5.35GHz	802.11be EHT160-BF	160	2TX
5.47-5.725GHz	802.11be EHT160-BF	160	2TX

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80, VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ HEW20, HEW40, HEW80, HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80, EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160/HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

1.1.2 MRU (static preamble puncturing)

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)	5GHz Test CH						
		80	CH42	CH58	CH106	CH122	CH138	CH155	CH171
484+242	1		--	V	--	V	V	V	V
	2		V	V	V	V	V	V	V
	3		V	V	V	V	V	V	V
	4		V	--	V	V	--	V	--

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)	5GHz Test CH		
		160	CH50	CH114	CH163
996+484	1		--	V	--
	2		V	V	V
	3		V	V	V
	4		V	--	V
996+484+242	1		--	V	V
	2		V	V	V
	3		V	V	V
	4		V	V	V
	5		V	V	V
	6		V	V	V
	7		V	V	V
	8		V	--	V

1.1.3 Worst case of MRU (static preamble puncturing) evaluation procedure

1. Complete test Full RU BE & PSD
2. Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration
4. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated unwanted emission testing
5. Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 3 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU(static preamble puncturing) needs to be retested.



1.1.4 Antenna Information

O-405

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	VVDN	401-1-03634	PCBA Antenna	I-Pex	2.4G/5G	Radio1/2
2	VVDN	401-1-03634	PCBA Antenna	I-Pex	2.4G/5G	Radio1/2
3	VVDN	401-1-03635	PCBA Antenna	I-Pex	6G	Radio 3
4	VVDN	401-1-03635	PCBA Antenna	I-Pex	6G	Radio 3
5	VVDN	601-1-16517	Metal Stamp Antenna	I-Pex	GPS	-

Ant.	Port	Gain (dBi)									
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	GPS
1	1	6.16	5.7	5.71	5.55	3.97	-	-	-	-	-
2	2	6	5.45	4.84	4.47	4.08	-	-	-	-	-
3	1	-	-	-	-	-	5.02	5.57	5.2	6.28	-
4	2	-	-	-	-	-	3.49	3.75	4.73	5.08	-
5	1	-	-	-	-	-	-	-	-	-	3

Composite Gain (dBi)											
Ant.		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	
1~2	DG [1SS]	8.99	7.58	7.76	6.98	6.41	-	-	-	-	
	DG [2SS]	6.16	5.7	5.71	5.55	4.08	-	-	-	-	
3~4	DG [1SS]	-	-	-	-	-	6.56	7.45	7.29	8.39	
	DG [2SS]	-	-	-	-	-	5.02	5.57	5.2	6.28	

Note 1: The composite gain is derived as KDB 662911 D03 v01 which was used as directional gain. For more detail information, please refer to the Antenna Pattern Report AP571016.

Note 2: The EUT has Five antennas.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) < Radio 1 >

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode(2TX/2RX) < Radio 2 >

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be mode(2TX/2RX) < Radio 3 >

Ant. 3 (port 1) and Ant. 4 (port 2) could transmit/receive simultaneously.

O-405E

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	M-Gear	401-1-03626	Omni-Directional Antenna	N-type	2.4G/5G/6G	Radio1/2/3
2	M-Gear	401-1-03626	Omni-Directional Antenna	N-type	2.4G/5G/6G	Radio1/2/3
3	VVDN	601-1-16517	Metal Stamp Antenna	I-Pex	GPS	-

Ant.	Port	Gain (dBi)									
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	GPS
1	1	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	-
2	2	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	-
3	1	-	-	-	-	-	-	-	-	-	3

Note 3: The EUT has Three antennas.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) < **Radio 1** >

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode(2TX/2RX) < **Radio 2** >

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be mode(2TX/2RX) < **Radio 3** >

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

Note 4: Directional gain information

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

1.1.5 EUT Information

Operational Condition			
EUT Power Type	From PoE		
EUT Function	☒	Outdoor AP	☐ Indoor AP
	☐	Fixed P2P AP	☐ Client
Beamforming Function	☒	With beamforming	☐ Without beamforming
TPC Function	☒	With TPC Function	☐ Without TPC Function
Weather Band	☒	With 5600~5650MHz	☐ Without 5600~5650MHz
Resource Unit	☒	Full RU	☐ Partial RU
	☐	MRU(static preamble puncturing)	☐ MRU(dynamic preamble puncturing)
Channel Puncturing	☒	Support	☐ Not support
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.: ...		
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

1.1.6 Table for Multiple Listing

Model Name	Description
O-405	Wi-Fi Internal Antenna
O-405E	Wi-Fi External Antenna

1.1.7 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR571016AN

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Frequency bands U-NII-2A and U-NII-2C were added. 2. Enable Multi-RU and Puncturing Function.	Conducted and Unwanted Emissions were evaluated.

1.1.8 Mode Test Duty Cycle

Non-Beamforming_Full RU_O-405

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_2TX	0.992	0.03	1.978m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT160_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Multi-RU_O-405

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	0.895	0.48	2.747m	500
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	0.887	0.52	2.763m	500
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	0.717	1.44	1.422m	1k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Puncturing_O-405

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	0.997	0.01	5.455m	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	0.997	0.01	5.455m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Full RU_O-405E

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_2TX	0.991	0.04	1.978m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT160_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Multi-RU_O-405E

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	0.899	0.46	2.747m	500
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	0.809	0.92	1.694m	1k
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	0.725	1.4	1.422m	1k
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	0.912	0.4	2.763m	500

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Puncturing_O-405E

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	0.997	0.01	5.455m	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	0.997	0.01	5.455m	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	0.997	0.01	5.455m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming_Full RU_O-405

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10
802.11be EHT40-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10
802.11be EHT80-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming_Full RU_O-405E

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 662911 D03 v02
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☐	Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.) TEL: 886-3-327-3456 FAX: 886-3-327-0973		
Test site Designation No. TW3785 with FCC.				
☒	Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.) TEL: 886-3-327-0868		
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated_O-405 Full RU	03CH26-HY	Ivan Chung	22.0~23.1°C / 49~53%	31/Dec/2025~06/Jan/2026
Radiated_O-405E Full RU	03CH25-HY	Rian Chung	20.9~22.8°C / 51~55%	31/Dec/2025~07/Jan/2026
Radiated_O-405 MRU+PUN	03CH25-HY	Rian Chung	19.7~22.1°C / 51~55%	28/Jan/2026~29/Jan/2026
Radiated_O-405E MRU+PUN	03CH25-HY	Rian Chung	20.5~22.9°C / 52~55%	23/Jan/2026~26/Feb/2026
Radiated_O-405 (Co-location)	03CH26-HY	Ivan Chung	22.8~23.2°C / 53~54%	06/Jan/2026
Radiated_O-405E (Co-location)	03CH25-HY	Rian Chung	19.8~22.1°C / 53~54%	06/Jan/2026
RF Conducted Full RU	TH06-HY	Wayne Chiu	23.2~24.1°C / 52~58%	07/Jan/2026~14/Jan/2026
RF Conducted MRU+PUN	TH06-HY	Wayne Chiu	23.2~24.1°C / 52~58%	07/Jan/2026~26/Feb/2026

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	3.44 dB	Confidence levels of 95%
Conducted Output Power	1.48 dB	Confidence levels of 95%
Bandwidth	0.05 MHz	Confidence levels of 95%
Conducted Emission	1.48 dB	Confidence levels of 95%
Power Spectral Density	1.22 dB	Confidence levels of 95%
Radiated Emission (9 kHz ~ 30 MHz)	2.9 dB	Confidence levels of 95%
Radiated Emission (30 MHz ~ 1 GHz)	5.64 dB	Confidence levels of 95%
Radiated Emission (1 GHz ~ 18 GHz)	5.02 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	5.28 dB	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	Qdart_conn.win.1.0_installer_00099
-----------------------	------------------------------------

Non-Beamforming_Full RU_O-405

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5260MHz	16.5
5300MHz	17
5320MHz	17.5
5500MHz	17
5580MHz	17
5700MHz	16.5
5720MHz Straddle 5.47-5.725GHz	16.5
5720MHz Straddle 5.725-5.85GHz	16.5
5785MHz	23
5825MHz	23
802.11be EHT20_Nss1,(MCS0)_2TX	-
5260MHz	17.5
5300MHz	18
5320MHz	18
5500MHz	17.5
5580MHz	18
5700MHz	17.5
5720MHz Straddle 5.47-5.725GHz	17.5
5720MHz Straddle 5.725-5.85GHz	17.5
802.11be EHT40_Nss1,(MCS0)_2TX	-
5270MHz	20
5310MHz	17
5510MHz	19
5550MHz	20.5
5670MHz	20
5710MHz Straddle 5.47-5.725GHz	20
5710MHz Straddle 5.725-5.85GHz	20
802.11be EHT80_Nss1,(MCS0)_2TX	-
5290MHz	17
5530MHz	18.5
5610MHz	21
5690MHz Straddle 5.47-5.725GHz	20
5690MHz Straddle 5.725-5.85GHz	20
802.11be EHT160_Nss1,(MCS0)_2TX	-



5250MHz Straddle 5.15-5.25GHz	16.5
5250MHz Straddle 5.25-5.35GHz	16.5
5570MHz	18

Non-Beamforming_Multi-RU_O-405

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-
5210MHz	14.5
5290MHz	15.5
5530MHz	16.5
5610MHz	19.5
5690MHz Straddle 5.47-5.725GHz	18
5690MHz Straddle 5.725-5.85GHz	18
5775MHz	21.5
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-
5250MHz Straddle 5.15-5.25GHz	14.5
5250MHz Straddle 5.25-5.35GHz	14.5
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-
5570MHz	15

Non-Beamforming_Puncturing_O-405

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-
5210MHz	11
5290MHz	15
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-
5530MHz	6
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-
5610MHz	18.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-
5690MHz Straddle 5.47-5.725GHz	18
5690MHz Straddle 5.725-5.85GHz	18
5775MHz	17.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-
5250MHz Straddle 5.15-5.25GHz	10.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-
5250MHz Straddle 5.15-5.25GHz	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-
5250MHz Straddle 5.25-5.35GHz	10.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-
5250MHz Straddle 5.25-5.35GHz	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_2TX	-
5570MHz	5.5



802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX	-
5570MHz	9.5

Non-Beamforming_Full RU_O-405E

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5260MHz	17.5
5300MHz	17.5
5320MHz	18
5500MHz	16.5
5580MHz	17.5
5700MHz	16.5
5720MHz Straddle 5.47-5.725GHz	16.5
5720MHz Straddle 5.725-5.85GHz	16.5
802.11be EHT20_Nss1,(MCS0)_2TX	-
5260MHz	18.5
5300MHz	18.5
5320MHz	19
5500MHz	17
5580MHz	18
5700MHz	17.5
5720MHz Straddle 5.47-5.725GHz	17
5720MHz Straddle 5.725-5.85GHz	17
802.11be EHT40_Nss1,(MCS0)_2TX	-
5270MHz	20
5310MHz	19.5
5510MHz	19.5
5550MHz	20.5
5670MHz	20
5710MHz Straddle 5.47-5.725GHz	20
5710MHz Straddle 5.725-5.85GHz	20
802.11be EHT80_Nss1,(MCS0)_2TX	-
5290MHz	20
5530MHz	20.5
5610MHz	21
5690MHz Straddle 5.47-5.725GHz	20
5690MHz Straddle 5.725-5.85GHz	20
802.11be EHT160_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	19.5
5250MHz Straddle 5.25-5.35GHz	19.5
5570MHz	20.5

**Non-Beamforming_Multi-RU_O-405E**

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-
5210MHz	13.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-
5290MHz	17.5
5530MHz	17
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-
5610MHz	18.5
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-
5690MHz Straddle 5.47-5.725GHz	15.5
5690MHz Straddle 5.725-5.85GHz	15.5
5775MHz	17.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-
5250MHz Straddle 5.15-5.25GHz	17.5
5250MHz Straddle 5.25-5.35GHz	17.5
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-
5570MHz	16.5

Non-Beamforming_Puncturing_O-405E

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-
5210MHz	15
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-
5290MHz	16
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-
5530MHz	8.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-
5610MHz	20
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	-
5690MHz Straddle 5.47-5.725GHz	18
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	-
5690MHz Straddle 5.725-5.85GHz	18
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-
5775MHz	18.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX	-
5250MHz Straddle 5.15-5.25GHz	16.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-
5250MHz Straddle 5.15-5.25GHz	15.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX	-
5250MHz Straddle 5.25-5.35GHz	16.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-
5250MHz Straddle 5.25-5.35GHz	15.5



802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-
5570MHz	4.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-
5570MHz	6.5

Beamforming_Full RU_O-405

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-
5260MHz	17.5
5300MHz	18
5320MHz	18
5500MHz	17.5
5580MHz	18
5700MHz	17.5
5720MHz Straddle 5.47-5.725GHz	17.5
5720MHz Straddle 5.725-5.85GHz	17.5
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-
5270MHz	18
5310MHz	17
5510MHz	18.5
5550MHz	19
5670MHz	18.5
5710MHz Straddle 5.47-5.725GHz	18.5
5710MHz Straddle 5.725-5.85GHz	18.5
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-
5290MHz	17
5530MHz	18.5
5610MHz	19.5
5690MHz Straddle 5.47-5.725GHz	18.5
5690MHz Straddle 5.725-5.85GHz	18.5
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	16.5
5250MHz Straddle 5.25-5.35GHz	16.5
5570MHz	18

**Beamforming_Full RU_O-405E**

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-
5260MHz	18.5
5300MHz	18.5
5320MHz	19
5500MHz	17
5580MHz	18
5700MHz	17.5
5720MHz Straddle 5.47-5.725GHz	17
5720MHz Straddle 5.725-5.85GHz	17
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-
5270MHz	19
5310MHz	19.5
5510MHz	18.5
5550MHz	19.5
5670MHz	19
5710MHz Straddle 5.47-5.725GHz	19
5710MHz Straddle 5.725-5.85GHz	19
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-
5290MHz	19.5
5530MHz	19.5
5610MHz	20
5690MHz Straddle 5.47-5.725GHz	19
5690MHz Straddle 5.725-5.85GHz	19
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	19.5
5250MHz Straddle 5.25-5.35GHz	19.5
5570MHz	19.5

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
1	PoE Mode
Operating Mode > 1GHz	CTX
Orthogonal Planes of EUT	Y Plane
	
Worst Planes of EUT	V

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	CTX
1	WLAN 2.4G+WLAN 5G+ WLAN 6G
Refer to Sporton Test Report No.: FA571016-01 for Co-location RF Exposure Evaluation and Appendix E for Radiated Emission Co-location.	

2.3 Accessories

Accessories				
Pole mount 1	Brand Name	ARISTA	Model Name	M/E KIT ASSY (BRACKET)
Pole mount 2	Brand Name	ARISTA	Model Name	M/E KIT ASSY (Cable ties)


Reminder: Regarding to more detail and other information, please refer to user manual.

2.4 Support Equipment

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	PoE	PHIHONG	POE90U-BTA	-	-

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 cable	Power sync	CAT-6E-03	-	-
2	AC Power Cable	Power sync	PW-GPC180-3	-	Remote
3	PoE	PHIHONG	POE90U-BTA	-	Remote / Provided by Customer

2.5 Test Setup Diagram

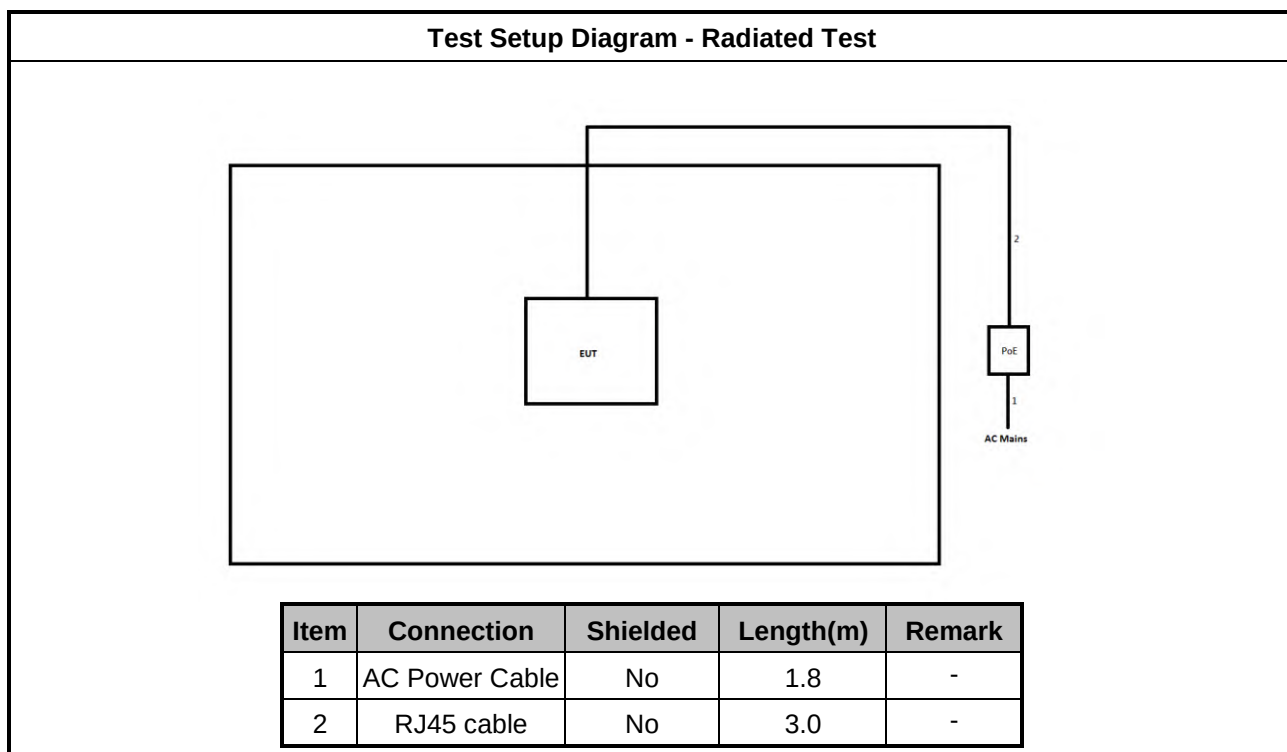

3 Transmitter Test Result

3.1 Emission Bandwidth

3.1.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, N/A
☒	For the 5.47-5.725 GHz band, N/A
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.1.4 Test Setup

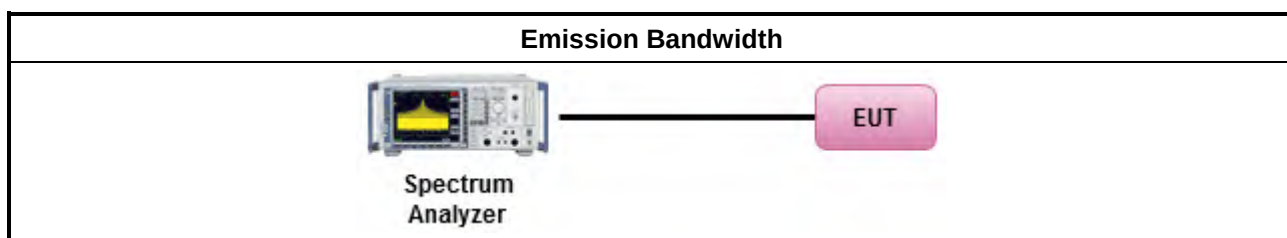

3.1.5 Test Result of Emission Bandwidth

Refer as Appendix A

3.2 Maximum Conducted Output Power

3.2.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
☐	Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm]
☐	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
☐	Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
☐	Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.725-5.85 GHz band:
☐	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
Maximum Conducted Output Power	
	Duty cycle $\geq 98\%$
☒	Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
☐	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as KDB 789033, clause E Method PM (using an RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$	

3.2.4 Test Setup

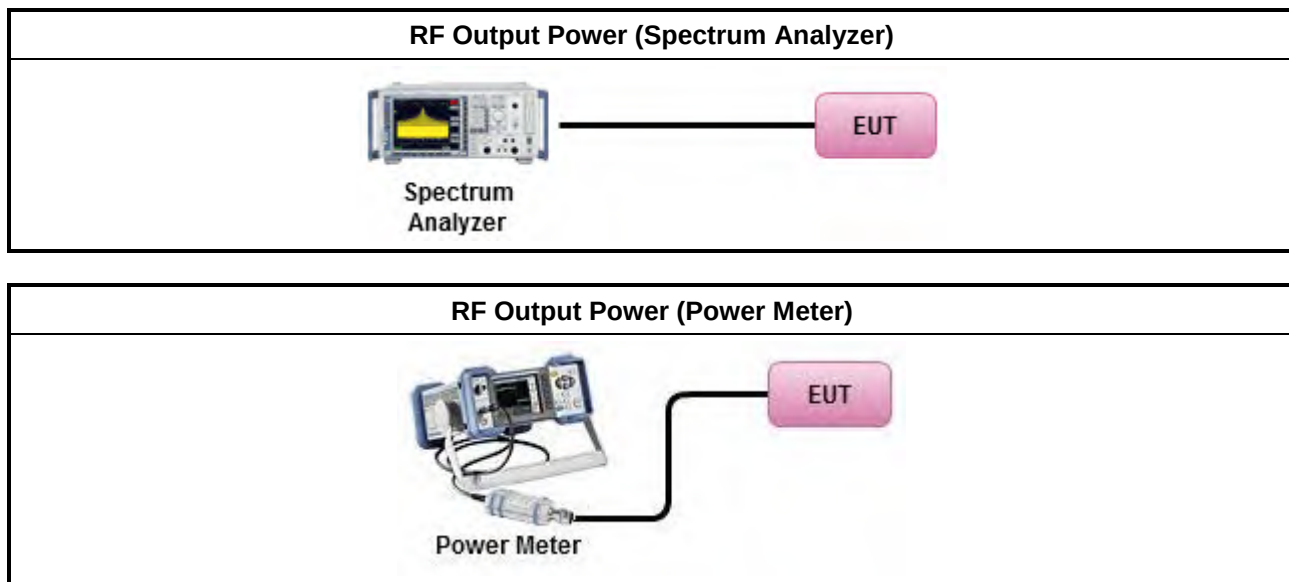

3.2.5 Test Result of Maximum Conducted Output Power

Refer as Appendix B

3.3 Peak Power Spectral Density

3.3.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
	Outdoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
	Indoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
	Point-to-point AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$.
	Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.725-5.85 GHz band:
	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐ Refer as KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth	Duty cycle ≥ 98%
☒ Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).	Duty cycle < 98%
☒ Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)	
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

3.3.4 Test Setup

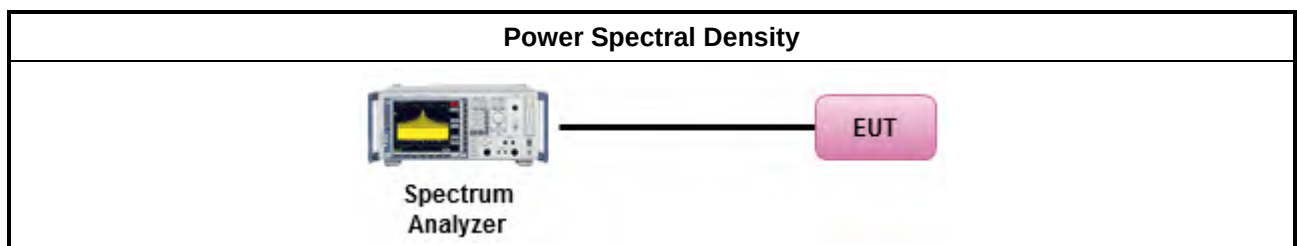

3.3.5 Test Result of Peak Power Spectral Density

Refer as Appendix C

3.4 Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.650-5700 GHz: e.i.r.p. -27 ~ 10 dBm [68.2 ~ 105.2 dBuV/m@3m] 5.700-5720 GHz: e.i.r.p. 10 ~ 15.6 dBm [105.2 ~ 110.8 dBuV/m@3m] 5.720-5725 GHz: e.i.r.p. 15.6 ~ 27 dBm [110.8 ~ 122.2 dBuV/m@3m] 5.850-5.855 GHz: e.i.r.p. 27 ~ 15.6 dBm [122.2 ~ 110.8 dBuV/m@3m] 5.855-5.875 GHz: e.i.r.p. 15.6 ~ 10 dBm [110.8 ~ 105.2 dBuV/m@3m] 5.875-5.925 GHz: e.i.r.p. 10 ~ -27 dBm [105.2 ~ 68.2dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as KDB 789033, G)6) Method VB (ANSI C63.10, clause 4.1.5.2.3), Reduced VBW.
	☒ Refer as KDB 789033, clause G)5) (ANSI C63.10, clause 4.1.5.2.2), measurement procedure peak limit.
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.4.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.4.5 Test Setup

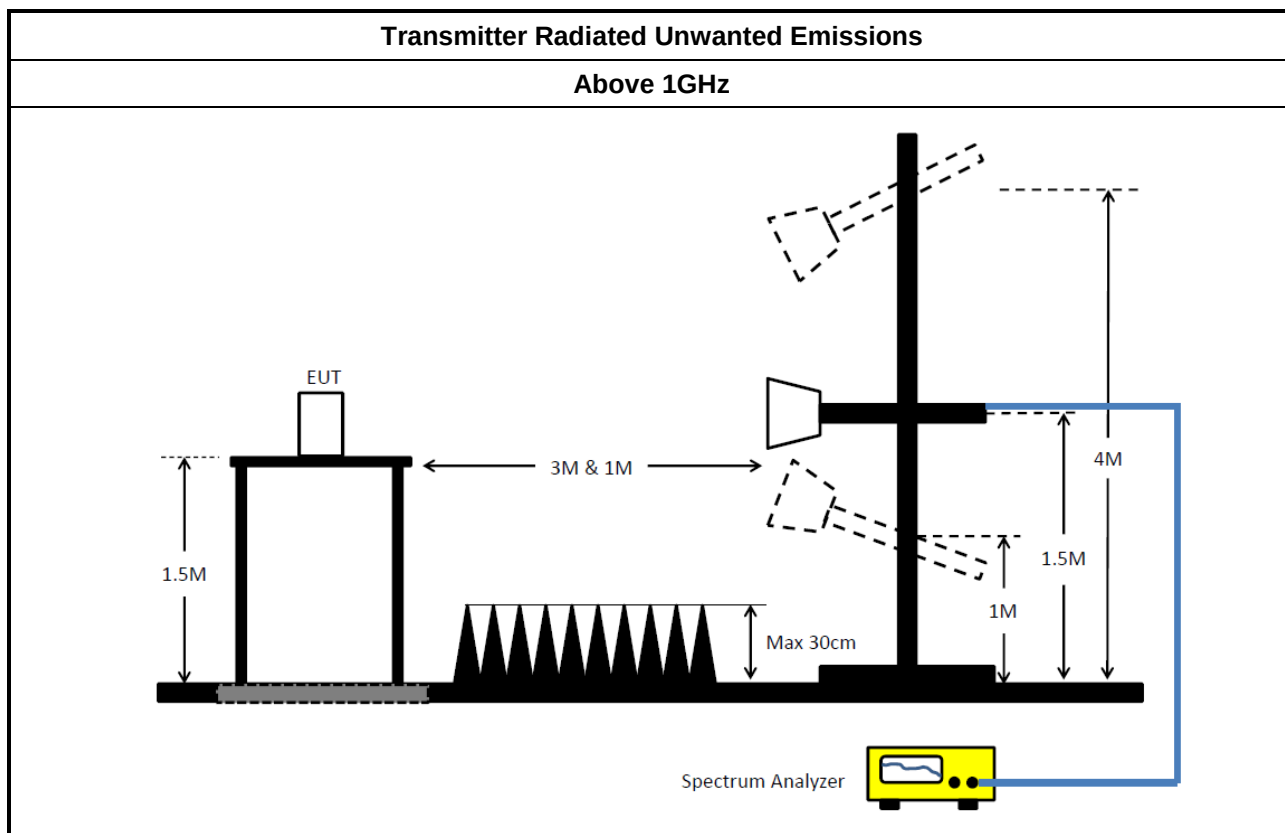

3.4.6 Test Result of Transmitter Unwanted Emissions

Refer as Appendix D

4 Test Equipment and Calibration Data

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	30/Oct/2025	29/Oct/2026
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	29/Oct/2025	28/Oct/2026
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	28/Mar/2025	27/Mar/2026
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	28/Mar/2025	27/Mar/2026
SENSE-15407_NII	Sporton	V5.11.27	N/A	N/A	N/A	N/A

Instrument for Radiated Test_O-405_Full RU (03CH26-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	21/May/2025	20/May/2026
Microwave Preamplifier	Agilent	8449B	3008A02602	1GHz ~18GHz	12/Mar/2025	11/Mar/2026
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

Instrument for Radiated Test_O-405E_Full RU (03CH25-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	07/Aug/2025	06/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	19/Nov/2025	18/Nov/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	15/Feb/2025	14/Feb/2026
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz~18GHz	21/May/2025	20/May/2026
Preamplifier	EMCI	EM01G18G	060940	1GHz~18GHz	21/Oct/2025	20/Oct/2026
Amplifier	EM	EM18G40GA	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

**Instrument for Radiated Test Multi-RU+Puncturing**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	07/Aug/2025	06/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	19/Nov/2025	18/Nov/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	15/Feb/2025	14/Feb/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	10/Feb/2026	09/Feb/2027
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz~18GHz	21/May/2025	20/May/2026
Preamplifier	EMCI	EM01G18G	060940	1GHz~18GHz	21/Oct/2025	20/Oct/2026
Amplifier	EM	EM18G40GA	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

Instrument for Radiated Test Co-location_O-405

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	21/May/2025	20/May/2026
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-EMI	Sporton	V5.11.9	NA	NA	NA	NA

Instrument for Radiated Test Co-location_O-405E

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	07/Aug/2025	06/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	19/Nov/2025	18/Nov/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	15/Feb/2025	14/Feb/2026
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz~18GHz	21/May/2025	20/May/2026
Amplifier	EM	EM18G40GA	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-EMI	Sporton	V5.11.9	NA	NA	NA	NA

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	89.68M	78.921M	78M9D1D	86.32M	78.761M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.21M	16.987M	17M0D1D	21.56M	16.822M
802.11be EHT20_Nss1,(MCS0)_2TX	23.54M	19.295M	19M3D1D	20.955M	19.02M
802.11be EHT40_Nss1,(MCS0)_2TX	44.66M	38.371M	38M4D1D	42.68M	37.711M
802.11be EHT80_Nss1,(MCS0)_2TX	83.82M	77.841M	77M8D1D	83.16M	77.181M
802.11be EHT160_Nss1,(MCS0)_2TX	88.96M	78.841M	78M8D1D	86M	78.441M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.165M	16.987M	17M0D1D	15.9M	13.388M
802.11be EHT20_Nss1,(MCS0)_2TX	22.495M	19.13M	19M1D1D	15.915M	14.453M
802.11be EHT40_Nss1,(MCS0)_2TX	44.77M	38.481M	38M5D1D	36.4M	33.898M
802.11be EHT80_Nss1,(MCS0)_2TX	86.9M	77.841M	77M8D1D	77.25M	73.463M
802.11be EHT160_Nss1,(MCS0)_2TX	174.24M	157.441M	157MD1D	172.92M	157.001M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	3.22M	5.117M	17M3D1D	3.16M	5.017M
802.11be EHT20_Nss1,(MCS0)_2TX	4.56M	5.017M	19M2D1D	4.34M	4.938M
802.11be EHT40_Nss1,(MCS0)_2TX	4.08M	5.517M	38M7D1D	4.08M	5.457M
802.11be EHT80_Nss1,(MCS0)_2TX	4.08M	6.737M	77M6D1D	4.08M	6.457M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	22.605M	16.987M	21.56M	16.822M
5300MHz	Pass	Inf	22.33M	16.932M	21.725M	16.822M
5320MHz	Pass	Inf	23.21M	16.932M	21.56M	16.877M
5500MHz	Pass	Inf	22.165M	16.987M	22M	16.987M
5580MHz	Pass	Inf	21.725M	16.822M	21.01M	16.767M
5700MHz	Pass	Inf	21.89M	16.877M	21.89M	16.932M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.275M	13.478M	15.9M	13.388M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.22M	5.117M	3.16M	5.017M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	22.77M	19.075M	21.835M	19.02M
5300MHz	Pass	Inf	22.55M	19.24M	22.22M	19.02M
5320MHz	Pass	Inf	23.54M	19.295M	20.955M	19.02M
5500MHz	Pass	Inf	22.11M	19.13M	21.12M	19.02M
5580MHz	Pass	Inf	22.275M	19.075M	21.835M	19.02M
5700MHz	Pass	Inf	21.505M	19.02M	22.495M	19.075M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.915M	14.468M	16.605M	14.453M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.34M	4.938M	4.56M	5.017M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	Inf	44.66M	37.931M	43.67M	38.261M
5310MHz	Pass	Inf	42.9M	37.711M	42.68M	38.371M
5510MHz	Pass	Inf	44.22M	38.151M	43.56M	38.371M
5550MHz	Pass	Inf	44.22M	38.041M	44.77M	38.481M
5670MHz	Pass	Inf	43.67M	38.261M	43.89M	38.151M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	37.415M	34.038M	36.4M	33.898M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.08M	5.457M	4.08M	5.517M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	Inf	83.82M	77.181M	83.16M	77.841M
5530MHz	Pass	Inf	84.92M	77.401M	86.9M	77.841M
5610MHz	Pass	Inf	86.02M	77.621M	83.6M	77.841M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	77.25M	73.463M	77.85M	73.538M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.08M	6.737M	4.08M	6.457M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	89.68M	78.921M	86.32M	78.761M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	88.96M	78.441M	86M	78.841M
5570MHz	Pass	Inf	174.24M	157.001M	172.92M	157.441M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.15-5.25GHz

07/01/2026

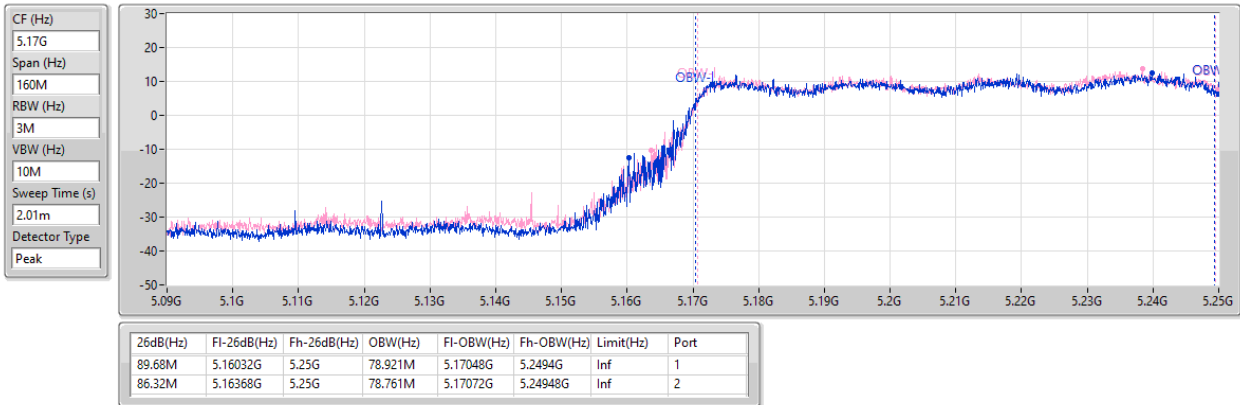


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5320MHz

07/01/2026

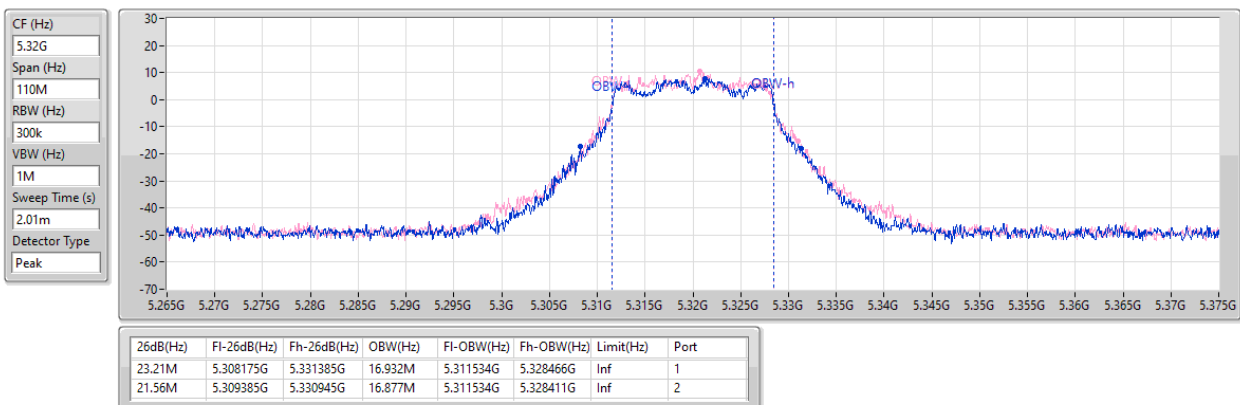


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5320MHz

07/01/2026

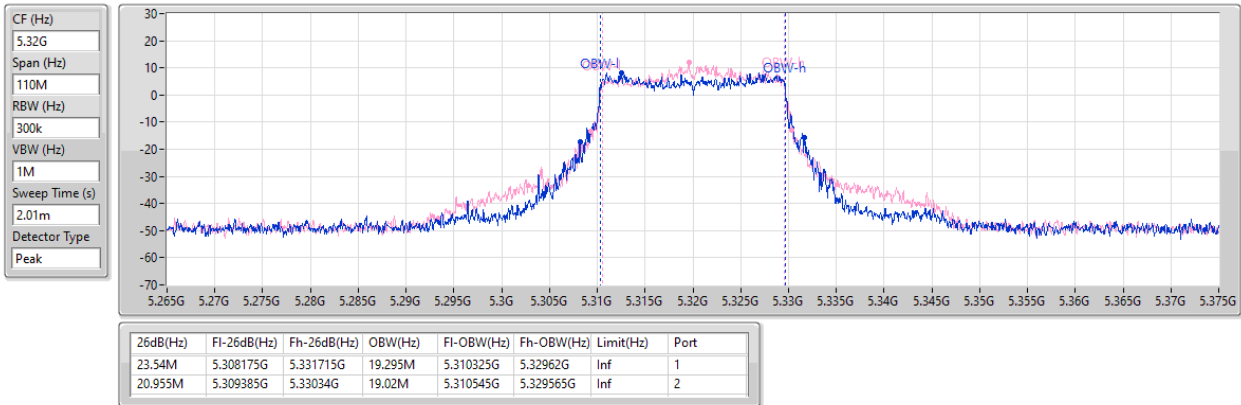


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5270MHz

07/01/2026

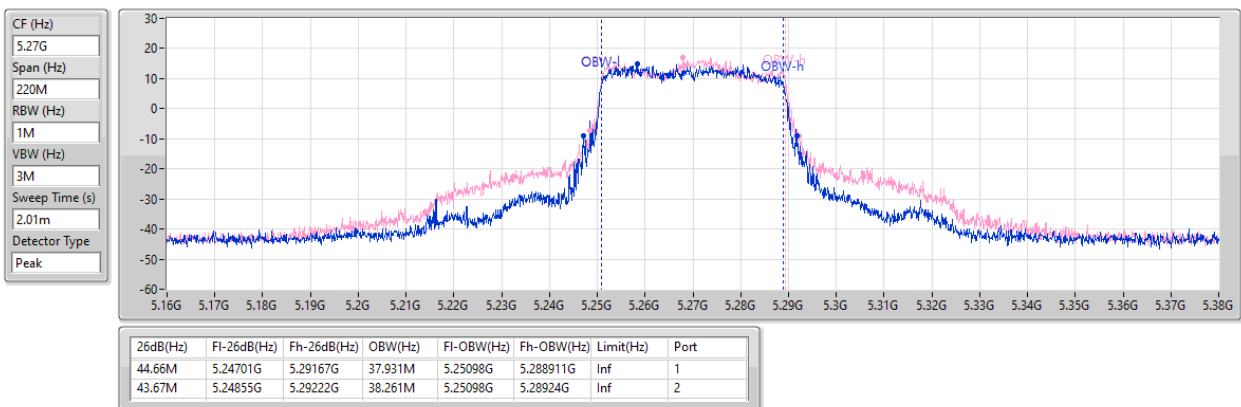


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5290MHz

07/01/2026

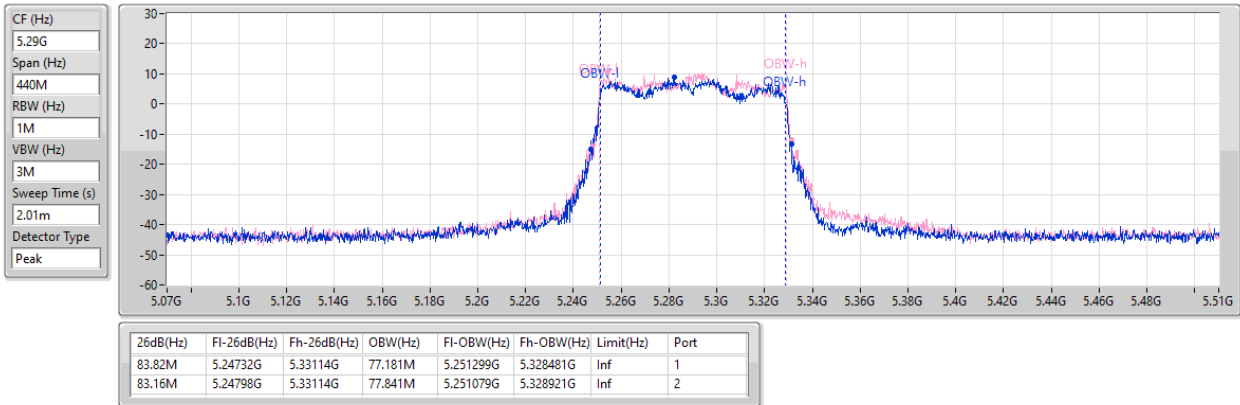


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.25-5.35GHz

07/01/2026

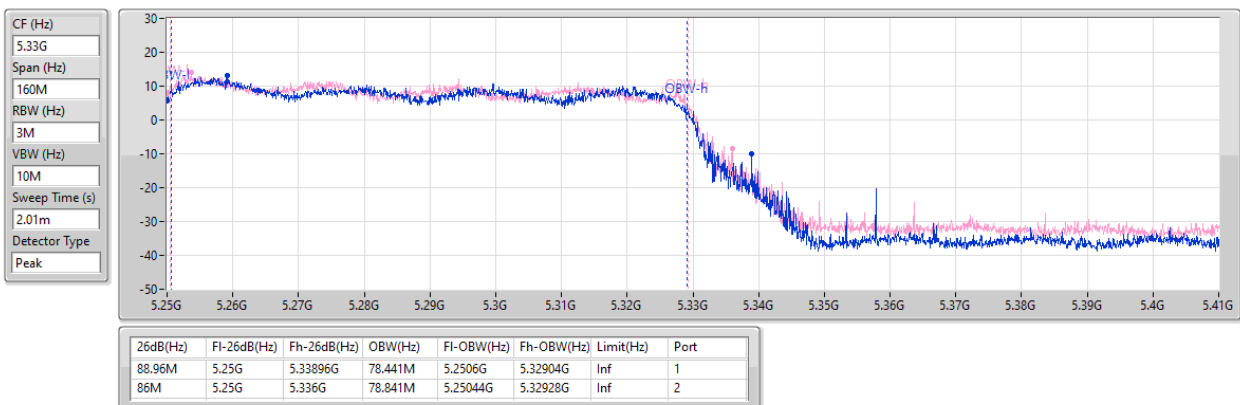


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5500MHz

07/01/2026

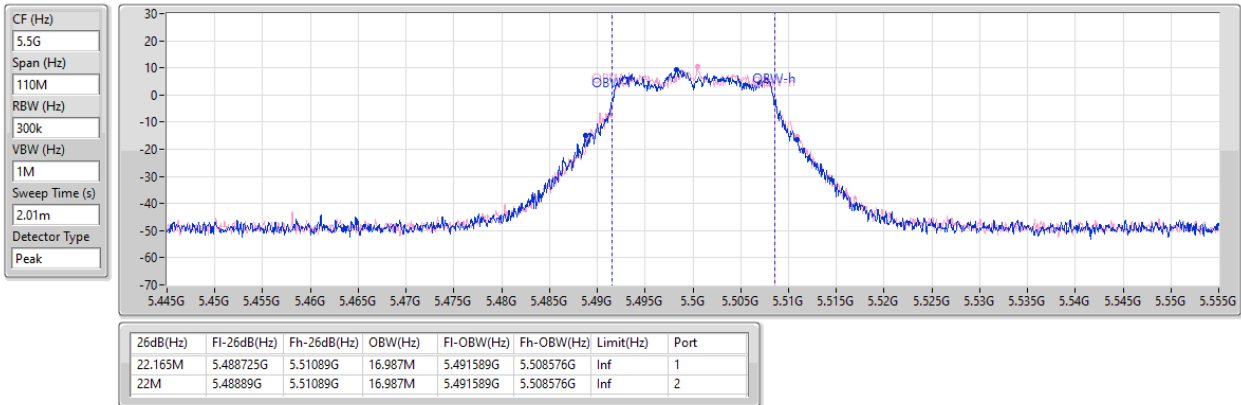


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5700MHz

07/01/2026

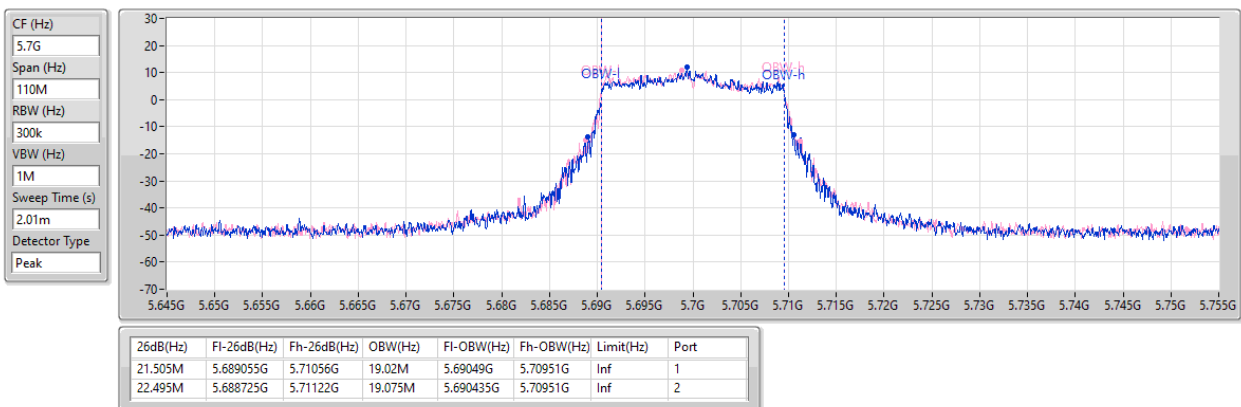


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5550MHz

07/01/2026

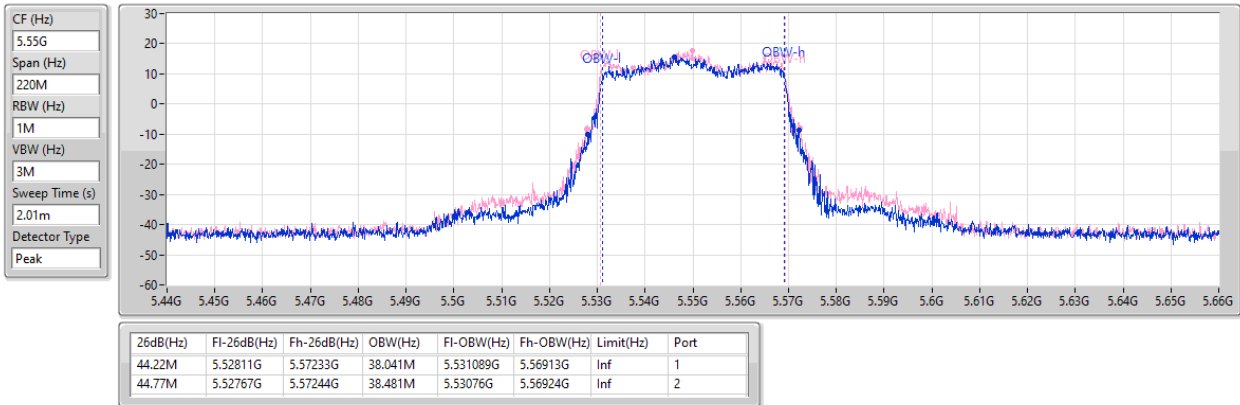


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5530MHz

07/01/2026

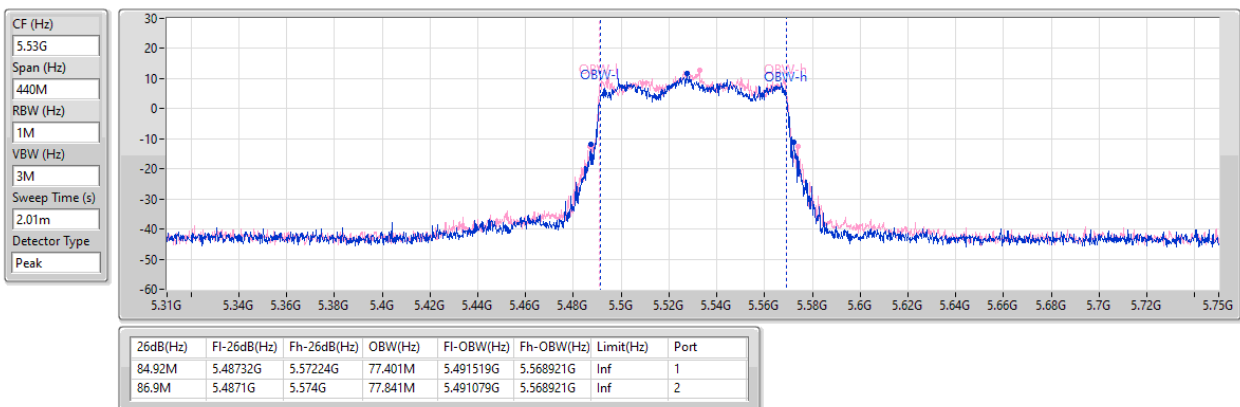


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5570MHz

07/01/2026

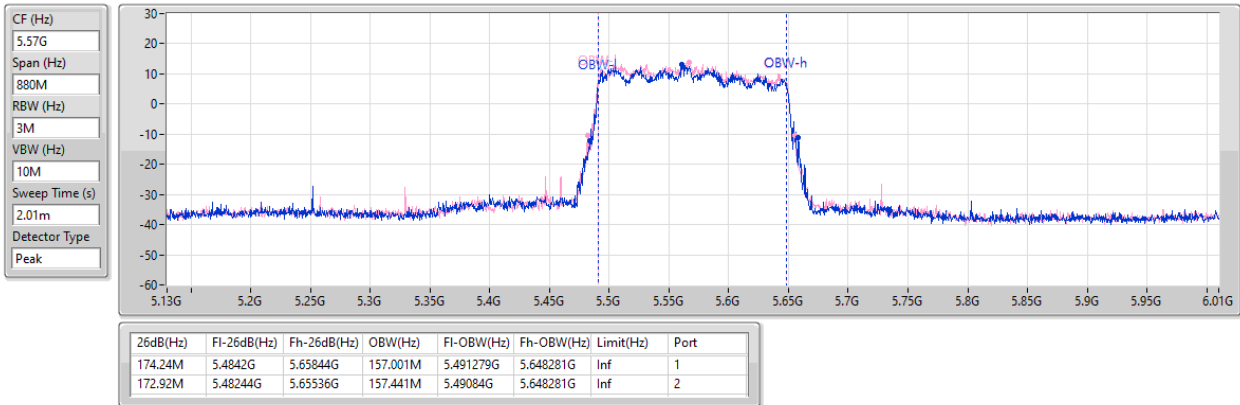


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

07/01/2026

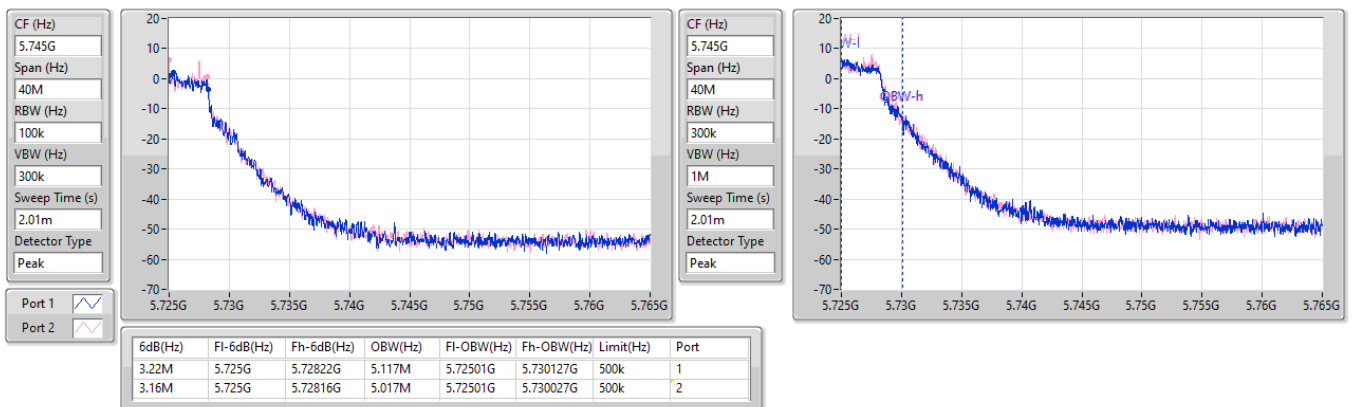


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

07/01/2026

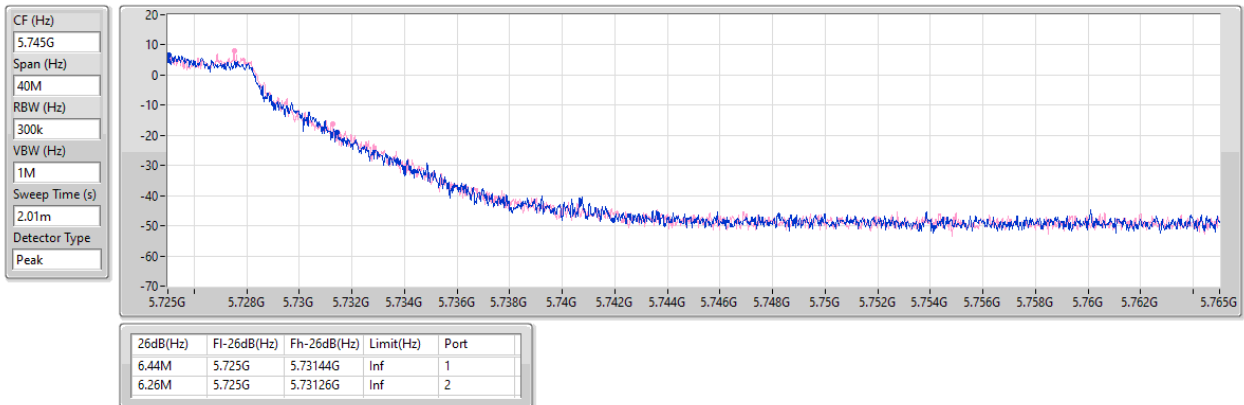


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

07/01/2026

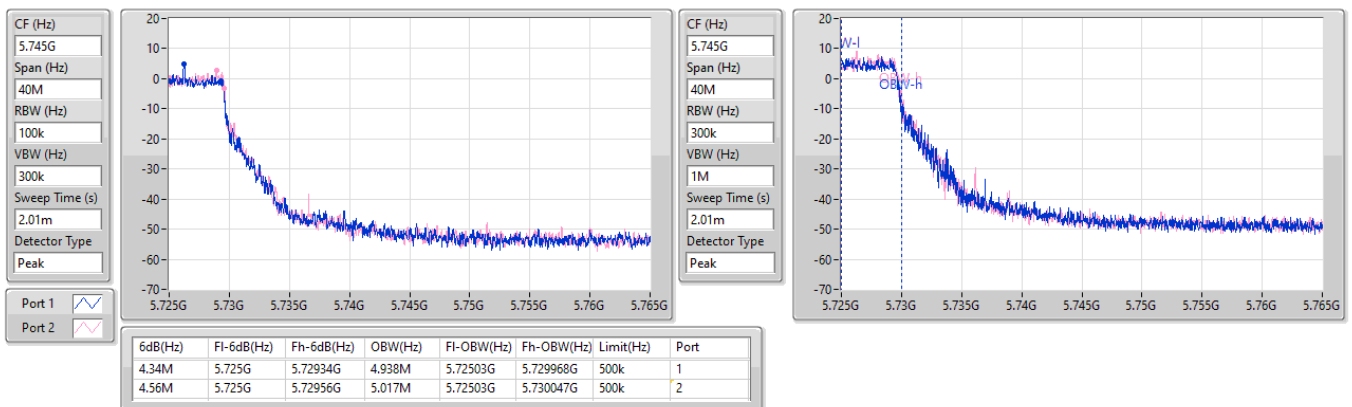


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

07/01/2026

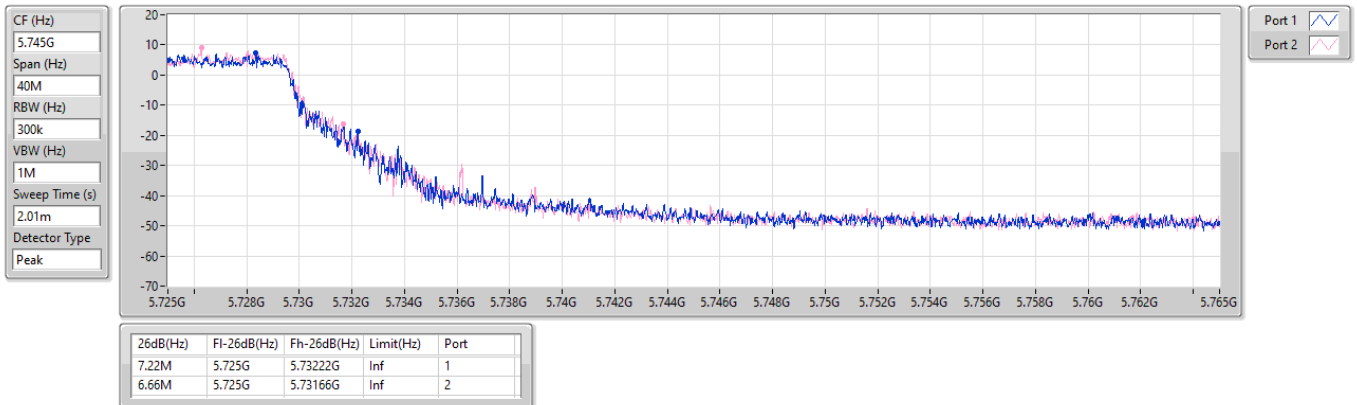


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

07/01/2026

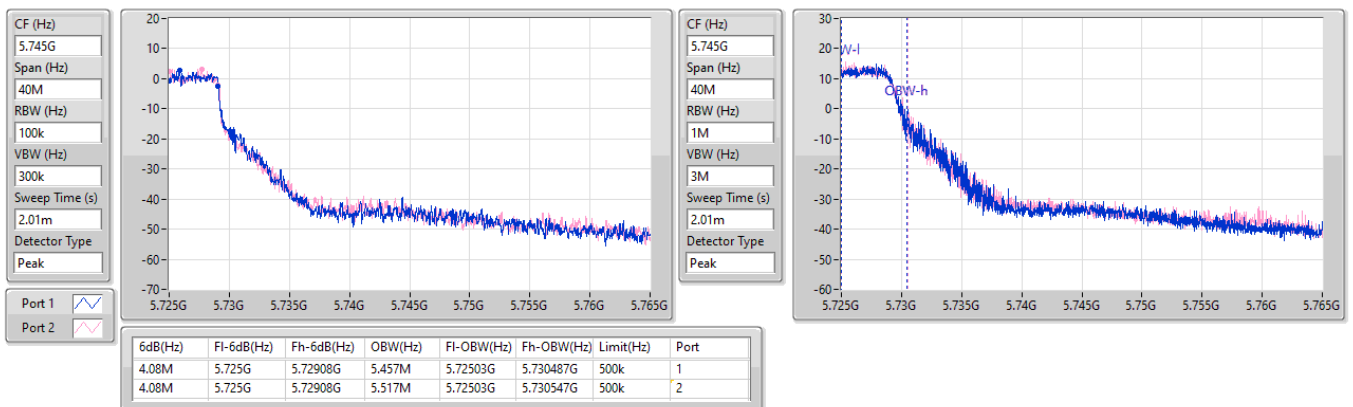


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

07/01/2026

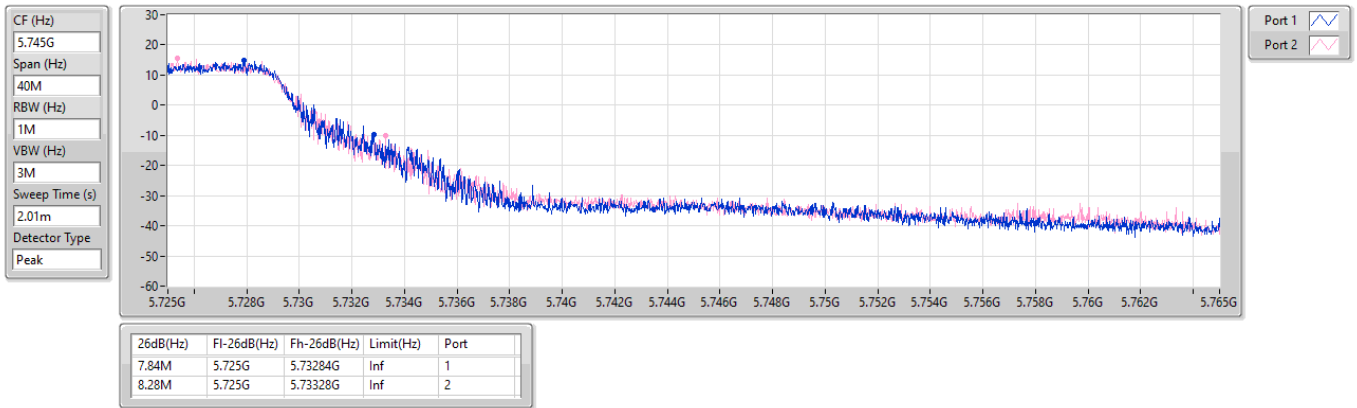


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5690MHz Straddle 5.725-5.85GHz

07/01/2026

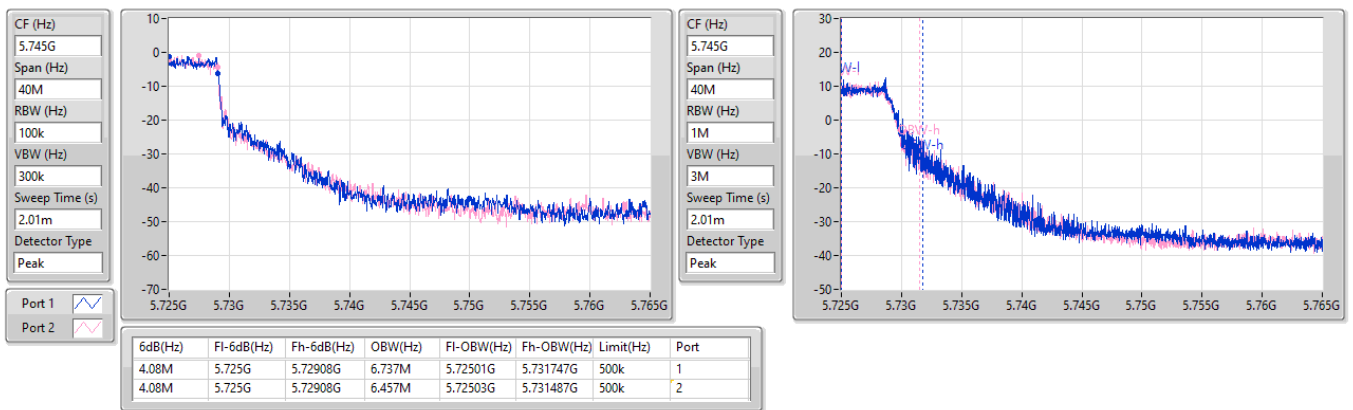


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5690MHz Straddle 5.725-5.85GHz

07/01/2026

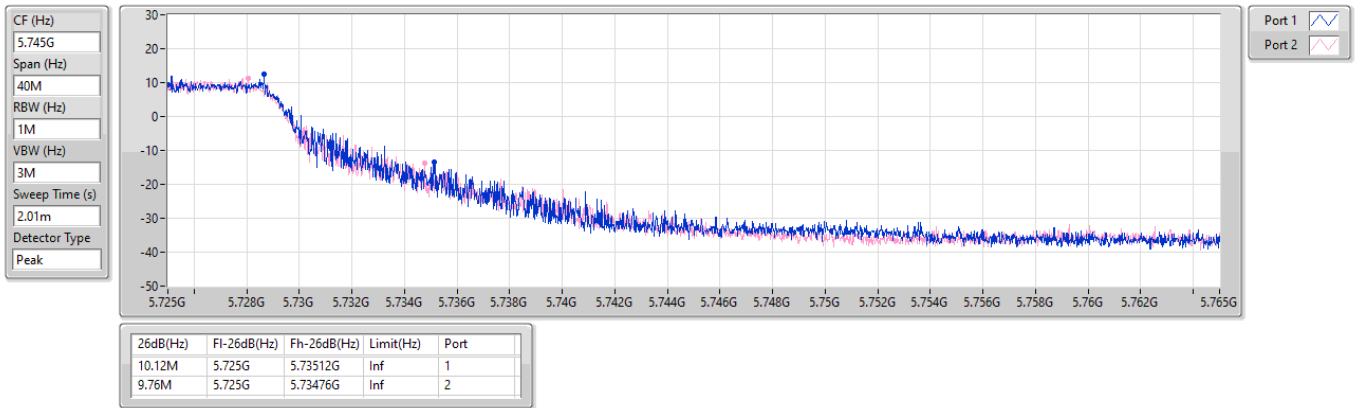

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	89.36M	78.841M	78M8D1D	87.2M	78.761M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.045M	16.987M	17M0D1D	21.615M	16.767M
802.11be EHT20_Nss1,(MCS0)_2TX	23.925M	19.185M	19M2D1D	21.505M	18.966M
802.11be EHT40_Nss1,(MCS0)_2TX	44.11M	38.371M	38M4D1D	42.24M	37.931M
802.11be EHT80_Nss1,(MCS0)_2TX	84.92M	77.621M	77M6D1D	83.6M	77.181M
802.11be EHT160_Nss1,(MCS0)_2TX	88.4M	78.841M	78M8D1D	88.08M	78.441M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.11M	16.932M	16M9D1D	15.93M	13.463M
802.11be EHT20_Nss1,(MCS0)_2TX	22.715M	19.075M	19M1D1D	15.75M	14.423M
802.11be EHT40_Nss1,(MCS0)_2TX	44.88M	38.481M	38M5D1D	36.96M	34.038M
802.11be EHT80_Nss1,(MCS0)_2TX	86.68M	77.841M	77M8D1D	76.95M	73.388M
802.11be EHT160_Nss1,(MCS0)_2TX	172.92M	157.441M	157MD1D	172.92M	157.001M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	3.28M	5.137M	17M5D1D	3.18M	4.938M
802.11be EHT20_Nss1,(MCS0)_2TX	4.54M	5.037M	19M2D1D	4.54M	4.918M
802.11be EHT40_Nss1,(MCS0)_2TX	4.06M	5.677M	39M0D1D	4.04M	5.577M
802.11be EHT80_Nss1,(MCS0)_2TX	4.06M	6.637M	77M8D1D	4.02M	6.517M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	22.66M	16.877M	21.615M	16.822M
5300MHz	Pass	Inf	23.045M	16.987M	22.11M	16.932M
5320MHz	Pass	Inf	22.55M	16.987M	21.67M	16.767M
5500MHz	Pass	Inf	21.89M	16.932M	21.505M	16.767M
5580MHz	Pass	Inf	22.11M	16.877M	21.67M	16.822M
5700MHz	Pass	Inf	21.78M	16.767M	21.505M	16.877M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.56M	13.508M	15.93M	13.463M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.18M	5.137M	3.28M	4.938M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	23.925M	19.13M	22.33M	19.075M
5300MHz	Pass	Inf	23.32M	19.185M	21.505M	18.966M
5320MHz	Pass	Inf	22.715M	19.185M	21.725M	18.966M
5500MHz	Pass	Inf	21.505M	19.075M	20.57M	19.02M
5580MHz	Pass	Inf	22.11M	19.075M	21.01M	18.966M
5700MHz	Pass	Inf	21.285M	18.911M	22.715M	19.075M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.75M	14.423M	17.01M	14.483M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.54M	4.918M	4.54M	5.037M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	Inf	42.79M	37.931M	42.24M	38.261M
5310MHz	Pass	Inf	42.24M	37.931M	44.11M	38.371M
5510MHz	Pass	Inf	43.34M	38.151M	43.78M	38.261M
5550MHz	Pass	Inf	43.34M	38.261M	44M	38.371M
5670MHz	Pass	Inf	44.22M	38.481M	44.88M	38.261M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	37.065M	34.073M	36.96M	34.038M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.06M	5.677M	4.04M	5.577M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	Inf	83.6M	77.181M	84.92M	77.621M
5530MHz	Pass	Inf	85.58M	77.621M	86.68M	77.841M
5610MHz	Pass	Inf	81.84M	77.621M	86.68M	77.621M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	78.225M	73.463M	76.95M	73.388M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.02M	6.637M	4.06M	6.517M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	87.2M	78.761M	89.36M	78.841M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	88.08M	78.441M	88.4M	78.841M
5570MHz	Pass	Inf	172.92M	157.001M	172.92M	157.441M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.15-5.25GHz

08/01/2026

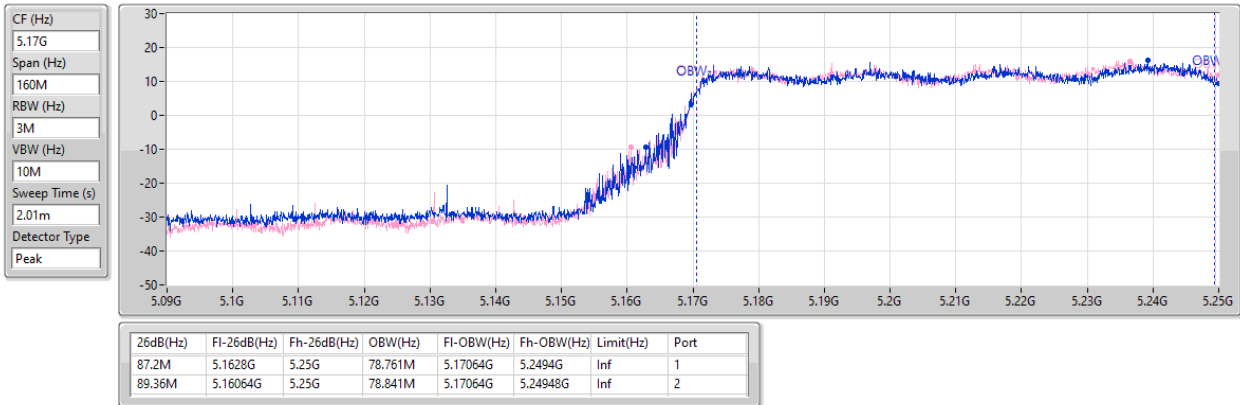


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5300MHz

09/01/2026

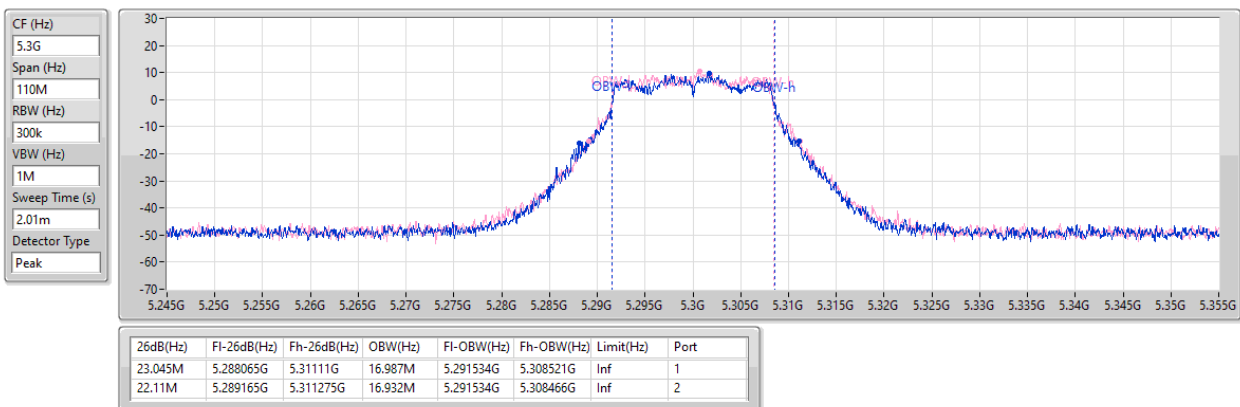


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5260MHz

09/01/2026

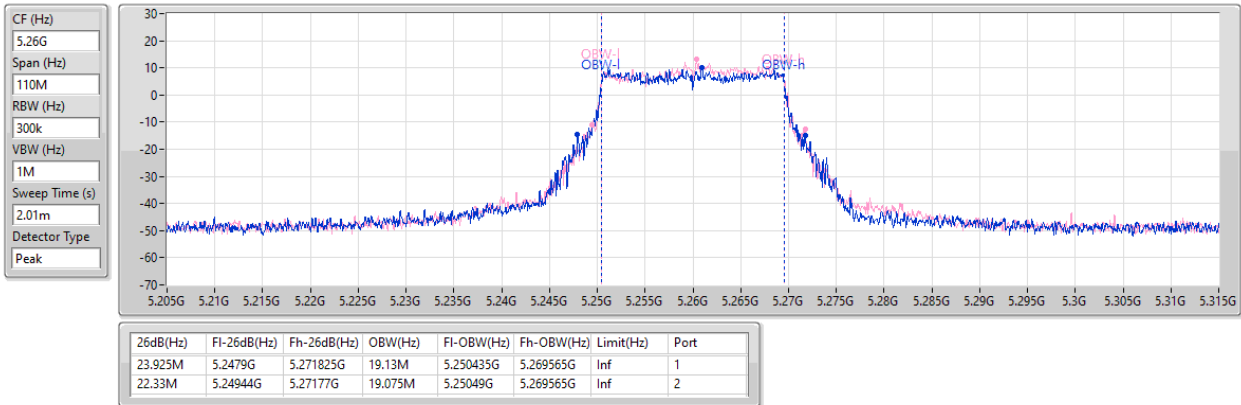


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5310MHz

08/01/2026

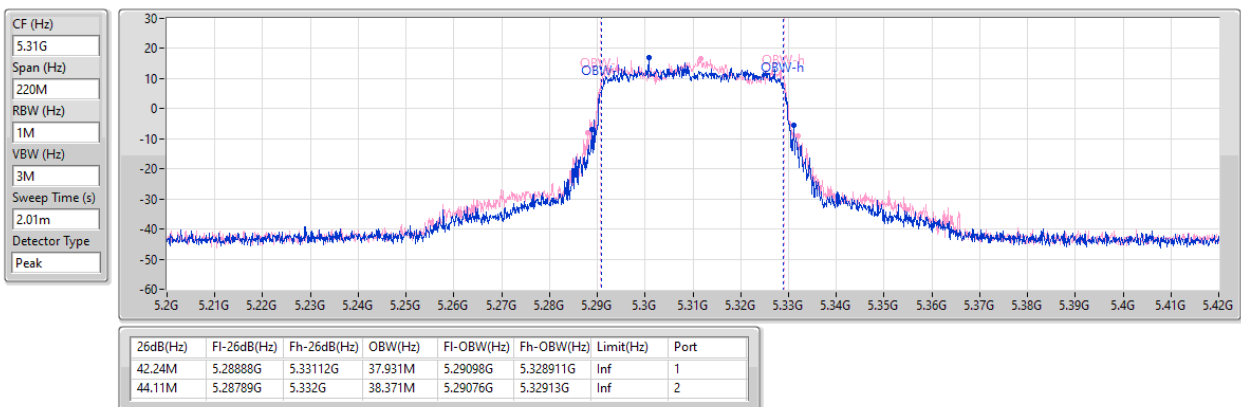


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5290MHz

08/01/2026

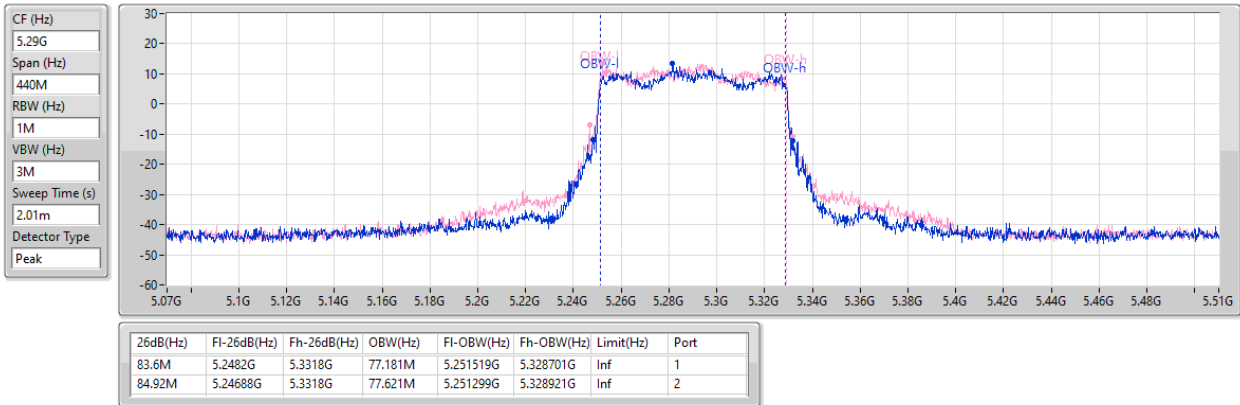


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.25-5.35GHz

08/01/2026

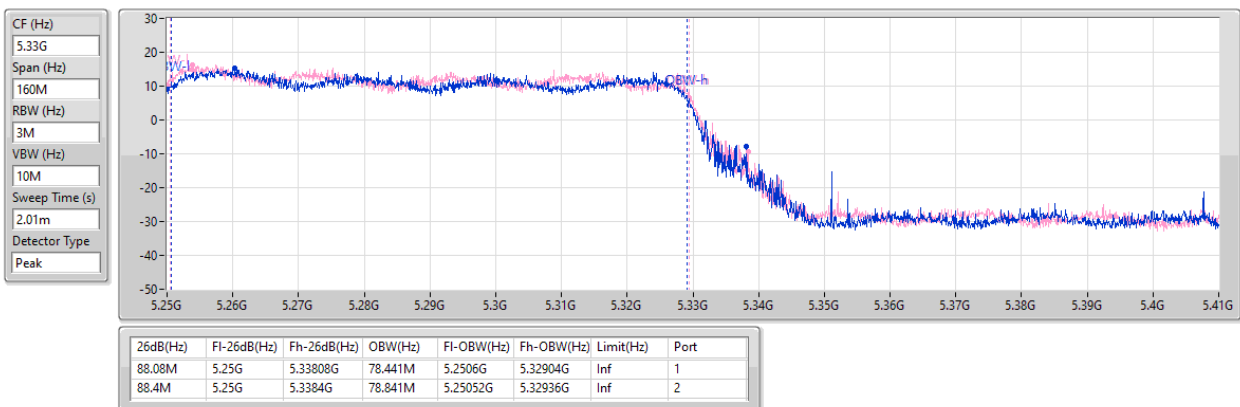


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5580MHz

09/01/2026

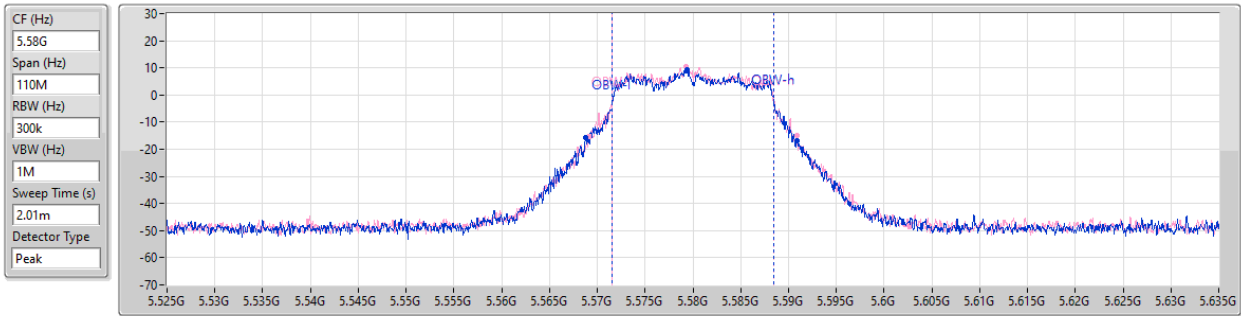


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.11M	5.568725G	5.590835G	16.877M	5.571589G	5.588466G	Inf	1
21.67M	5.569165G	5.590835G	16.822M	5.571589G	5.588411G	Inf	2

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5700MHz

09/01/2026

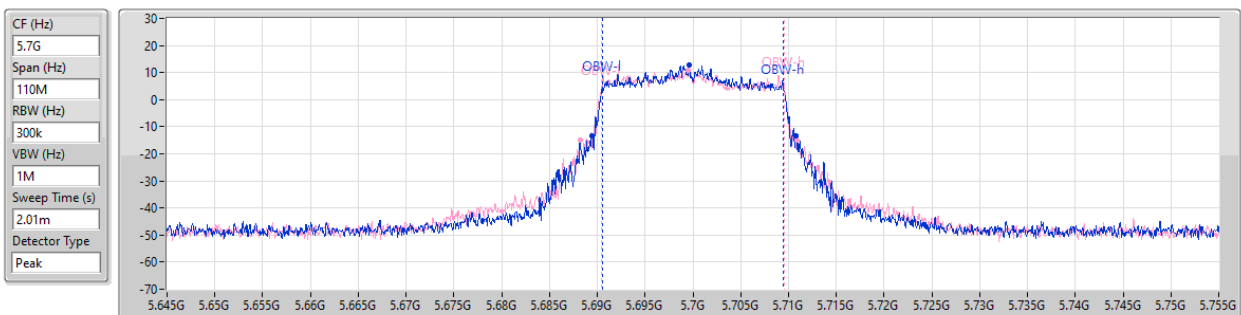


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.285M	5.689495G	5.71078G	18.911M	5.690545G	5.709455G	Inf	1
22.715M	5.688175G	5.71089G	19.075M	5.690435G	5.70951G	Inf	2

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5670MHz

08/01/2026

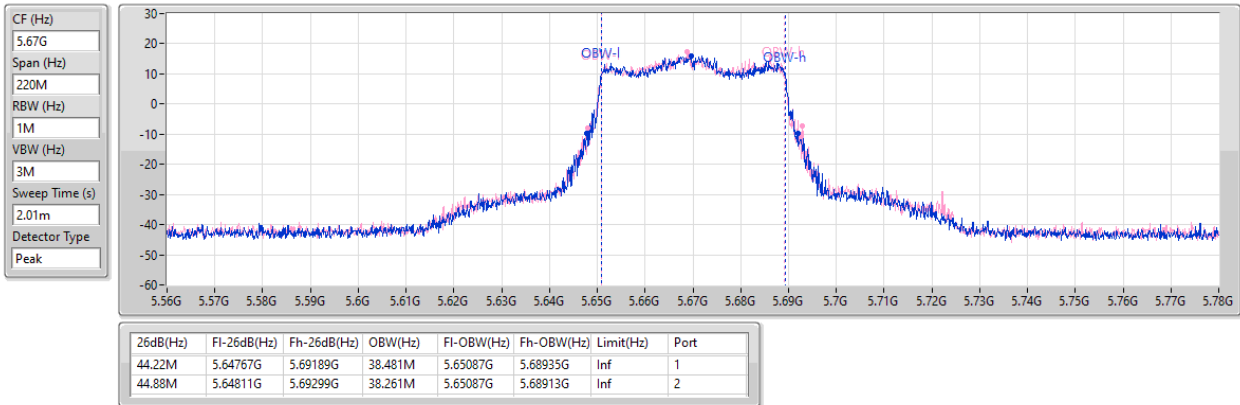


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5530MHz

08/01/2026

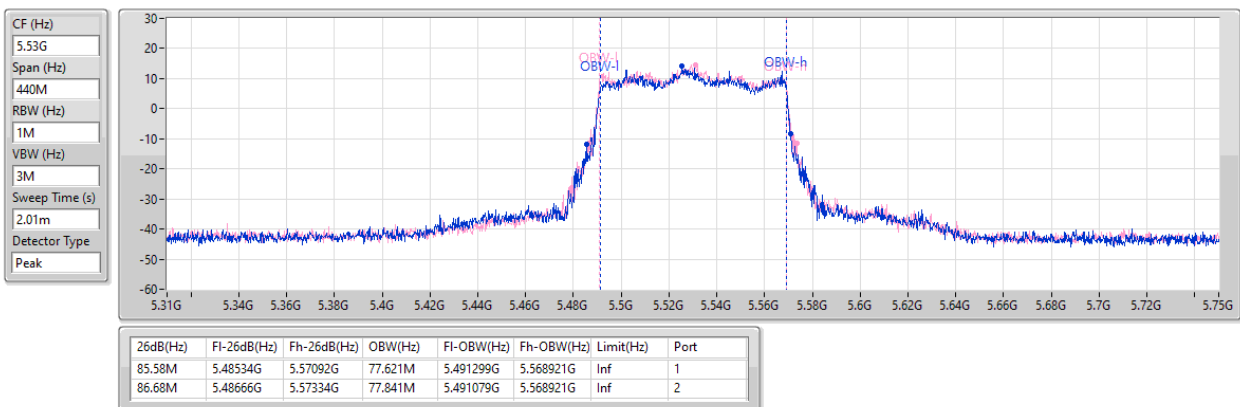


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5570MHz

08/01/2026

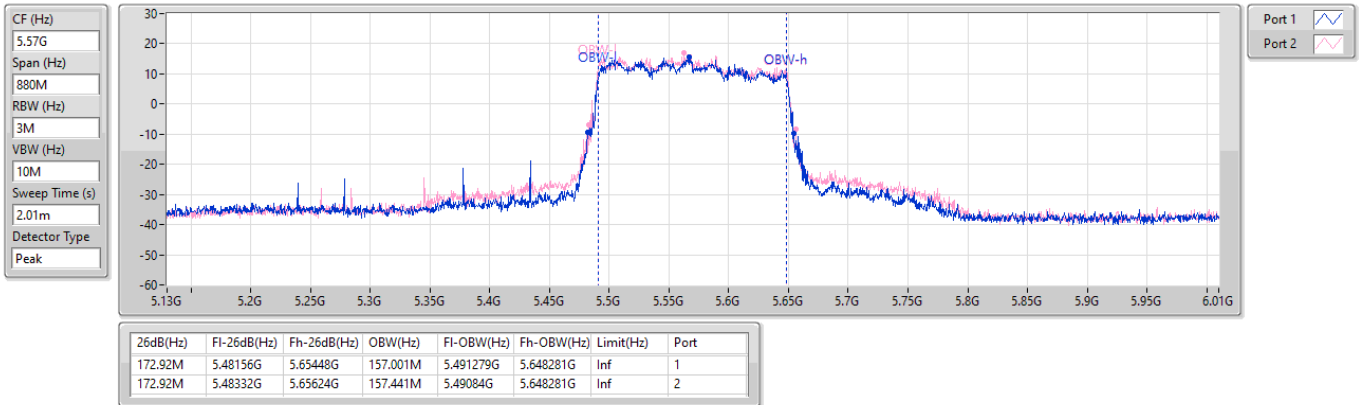


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

09/01/2026

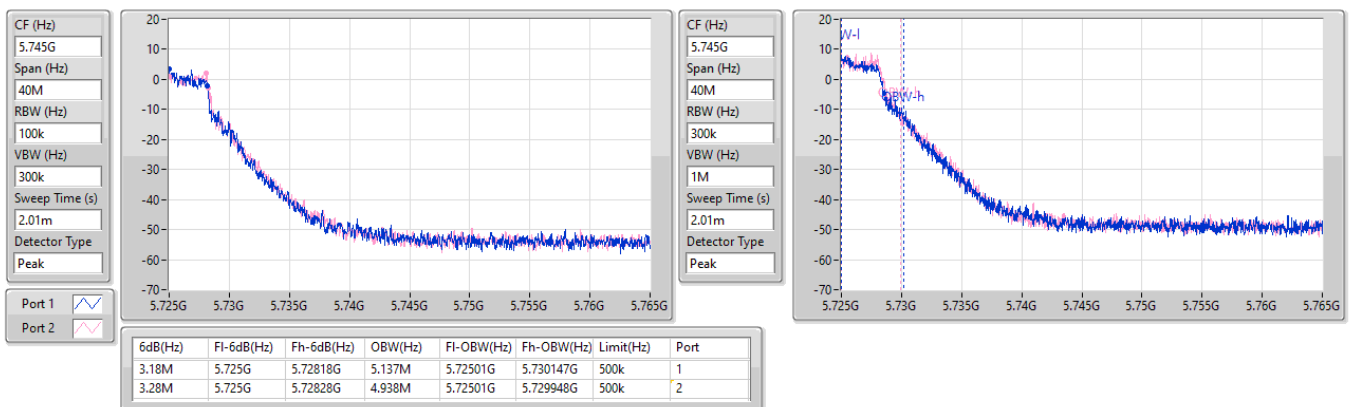


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

09/01/2026

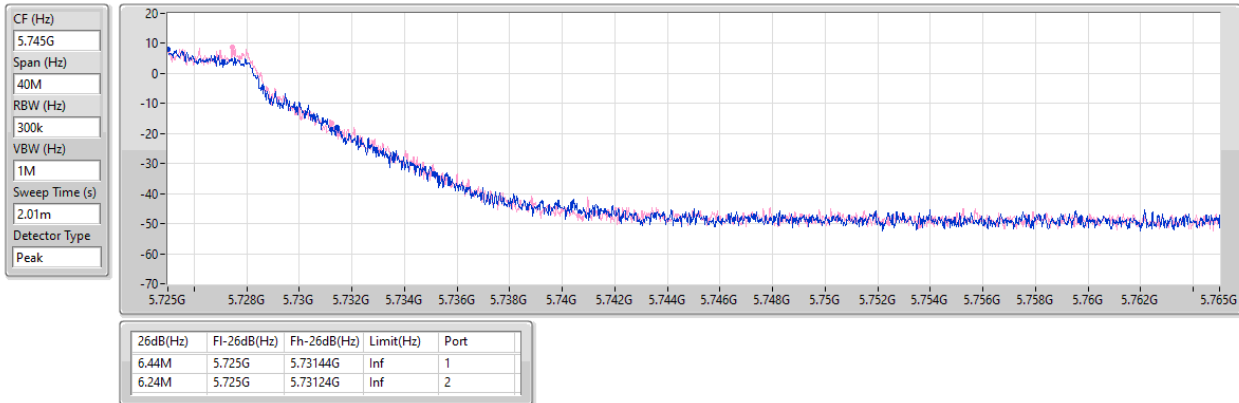


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

09/01/2026

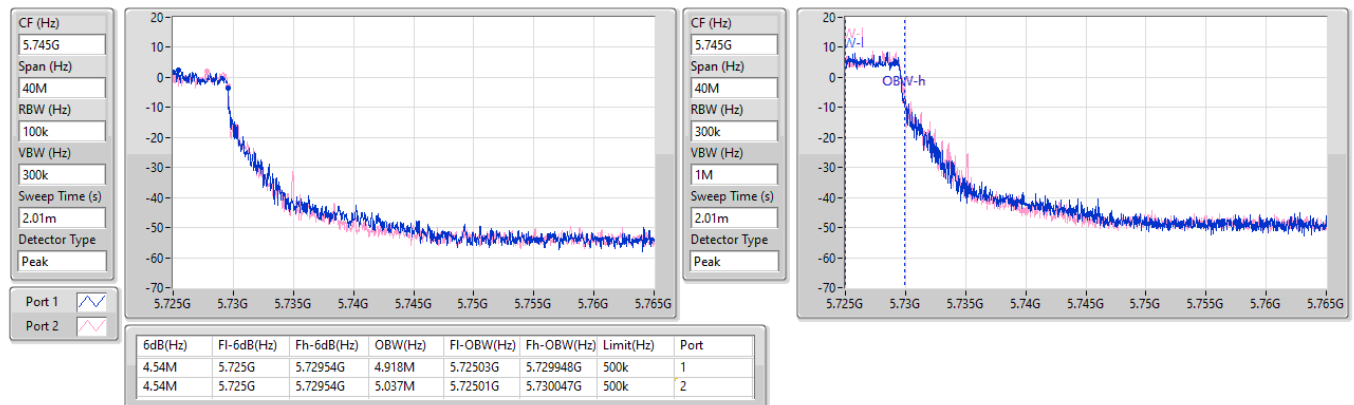


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

09/01/2026

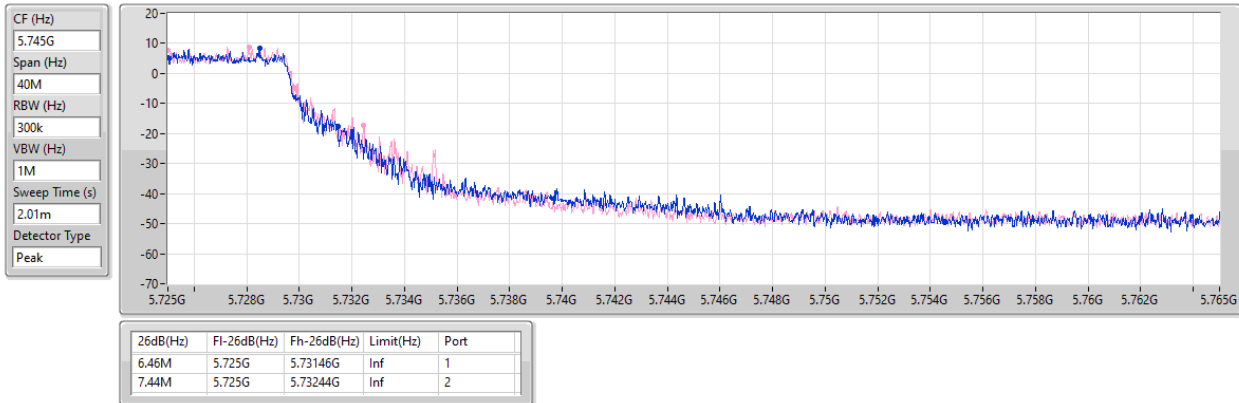


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

08/01/2026

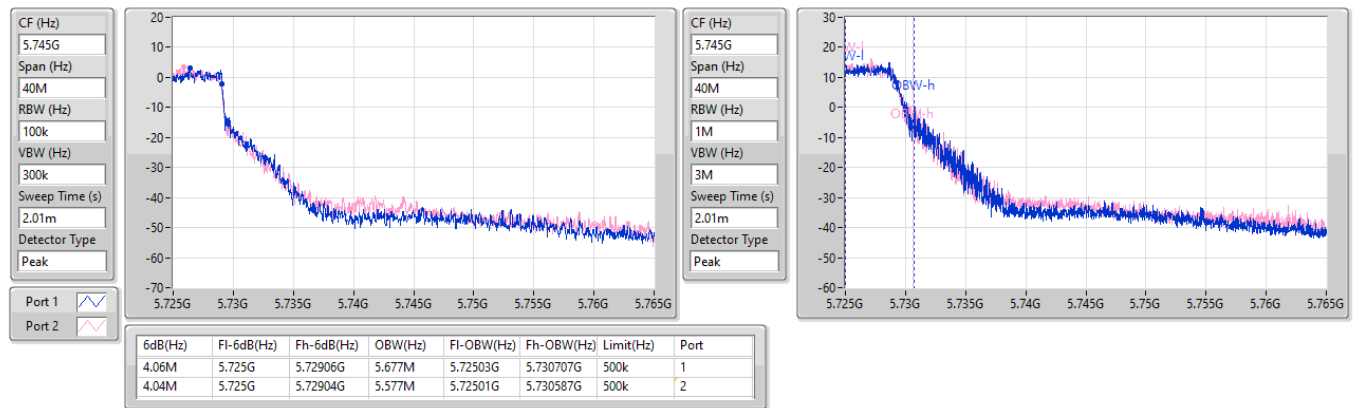


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

08/01/2026

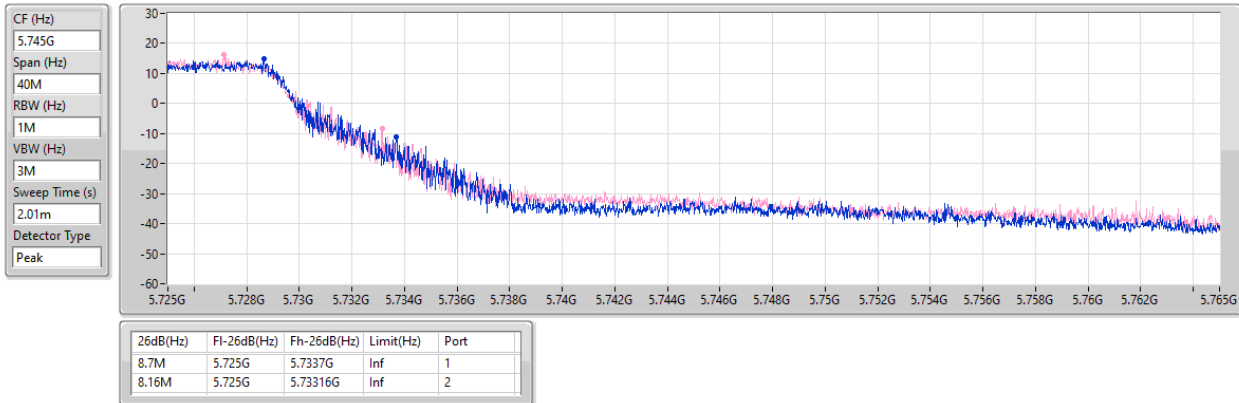


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

09/01/2026

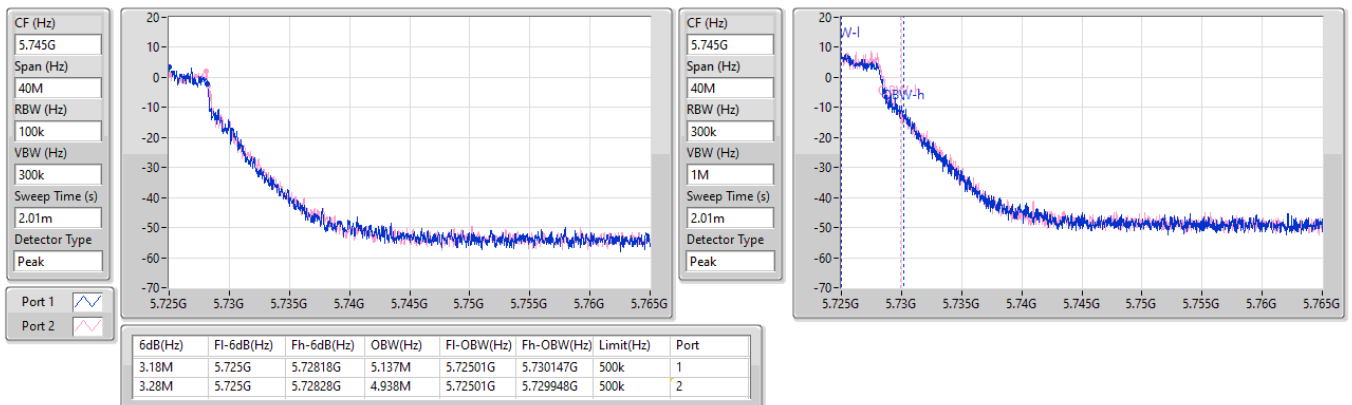


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

09/01/2026

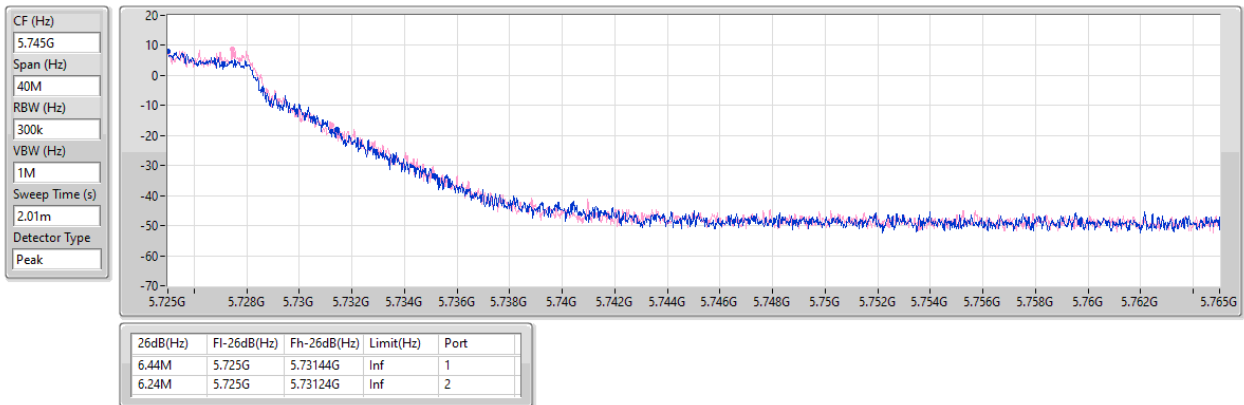

**Summary**

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	18.16	0.06546
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	20.15	0.10351
802.11be EHT20_Nss1,(MCS0)_2TX	21.01	0.12618
802.11be EHT40_Nss1,(MCS0)_2TX	23.52	0.22491
802.11be EHT80_Nss1,(MCS0)_2TX	20.17	0.10399
802.11be EHT160_Nss1,(MCS0)_2TX	17.62	0.05781
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	20.40	0.10965
802.11be EHT20_Nss1,(MCS0)_2TX	21.37	0.13709
802.11be EHT40_Nss1,(MCS0)_2TX	23.89	0.24491
802.11be EHT80_Nss1,(MCS0)_2TX	23.60	0.22909
802.11be EHT160_Nss1,(MCS0)_2TX	21.48	0.14060
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	12.05	0.01603
802.11be EHT20_Nss1,(MCS0)_2TX	13.59	0.02286
802.11be EHT40_Nss1,(MCS0)_2TX	14.46	0.02793
802.11be EHT80_Nss1,(MCS0)_2TX	10.85	0.01216

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP [Phi 30°] (dBm)	EIRP [Phi 30°] Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5260MHz	Pass	5.71	16.49	17.26	19.90	23.98		
5300MHz	Pass	5.71	16.29	17.53	19.96	23.98		
5320MHz	Pass	5.71	16.41	17.77	20.15	23.98		
5500MHz	Pass	5.55	16.96	17.78	20.40	23.98		
5580MHz	Pass	5.55	16.38	17.41	19.94	23.98		
5700MHz	Pass	5.55	16.89	17.36	20.14	23.98		
5720MHz Straddle 5.47-5.725GHz	Pass	5.55	16.32	16.61	19.48	23.01		
5720MHz Straddle 5.725-5.85GHz	Pass	4.08	8.91	9.17	12.05	30.00		
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-		
5260MHz	Pass	5.71	17.35	18.56	21.01	23.98		
5300MHz	Pass	5.71	16.96	18.72	20.94	23.98		
5320MHz	Pass	5.71	16.68	18.50	20.69	23.98		
5500MHz	Pass	5.55	17.55	18.60	21.12	23.98		
5580MHz	Pass	5.55	17.51	18.68	21.14	23.98		
5700MHz	Pass	5.55	18.21	18.51	21.37	23.98		
5720MHz Straddle 5.47-5.725GHz	Pass	5.55	17.77	17.60	20.70	23.02		
5720MHz Straddle 5.725-5.85GHz	Pass	4.08	10.14	10.98	13.59	30.00		
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-		
5270MHz	Pass	5.71	19.92	21.03	23.52	23.98		
5310MHz	Pass	5.71	16.20	17.74	20.05	23.98		
5510MHz	Pass	5.55	19.02	20.15	22.63	23.98		
5550MHz	Pass	5.55	20.26	21.42	23.89	23.98		
5670MHz	Pass	5.55	20.40	20.80	23.61	23.98		
5710MHz Straddle 5.47-5.725GHz	Pass	5.55	20.29	20.70	23.51	23.98		
5710MHz Straddle 5.725-5.85GHz	Pass	4.08	11.50	11.40	14.46	30.00		
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-		
5290MHz	Pass	5.71	16.58	17.67	20.17	23.98		
5530MHz	Pass	5.55	18.09	19.23	21.71	23.98		
5610MHz	Pass	5.55	20.08	21.05	23.60	23.98		
5690MHz Straddle 5.47-5.725GHz	Pass	5.55	20.19	20.76	23.49	23.98		
5690MHz Straddle 5.725-5.85GHz	Pass	4.08	7.84	7.84	10.85	30.00		
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-		
5250MHz Straddle 5.15-5.25GHz	Pass	5.70	14.92	15.37	18.16	30.00	18.78	21.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.71	14.30	14.90	17.62	23.98		
5570MHz	Pass	5.55	17.94	18.94	21.48	23.98		

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.15-5.25GHz_TX

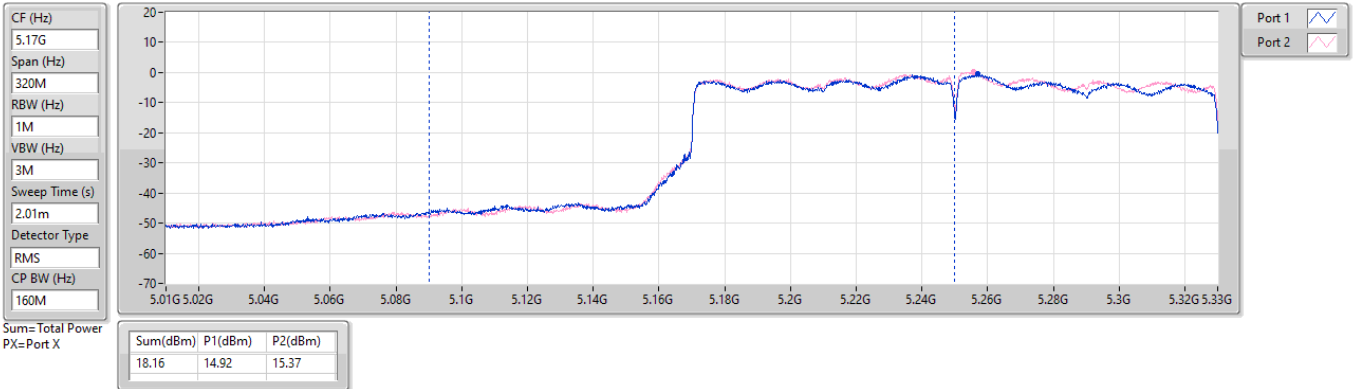

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.25-5.35GHz_TX

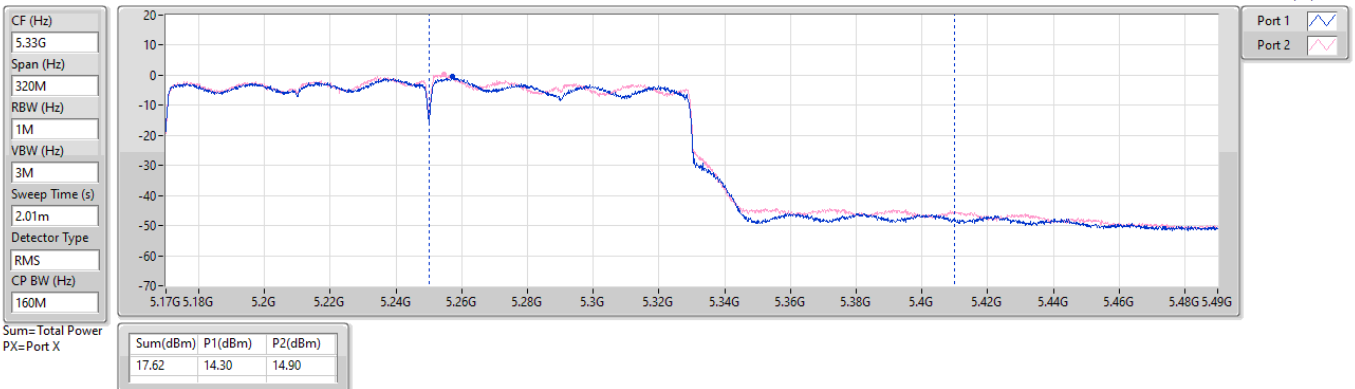

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

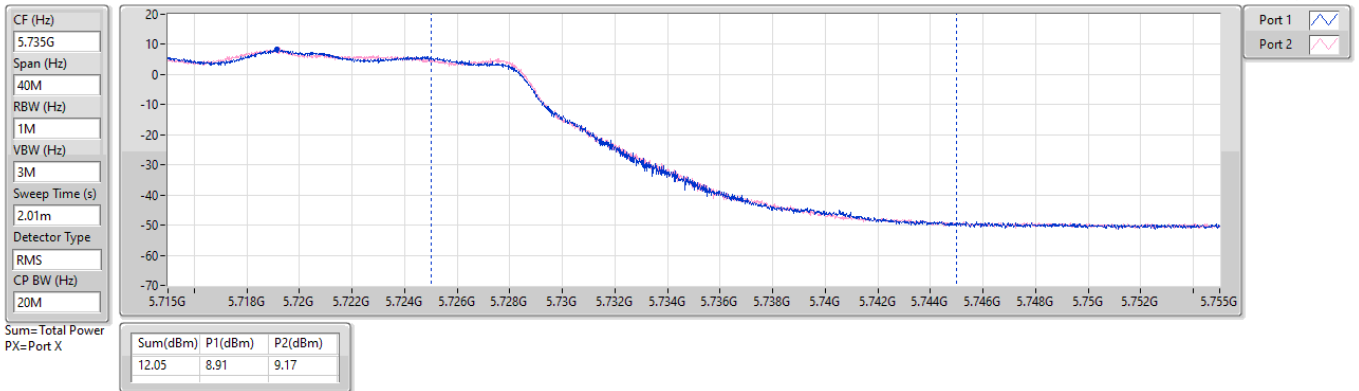

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

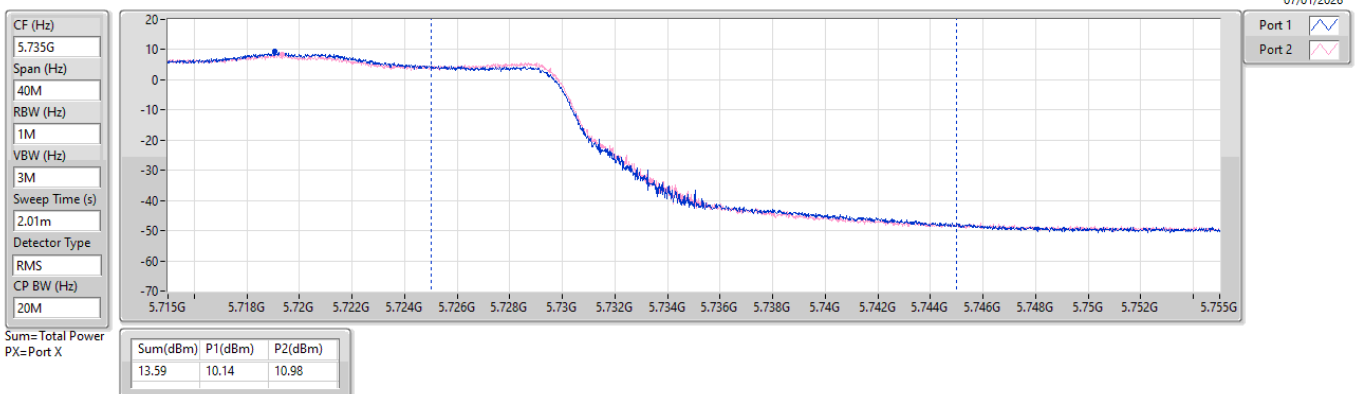

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

AV Power


5710MHz Straddle 5.725-5.85GHz_TX

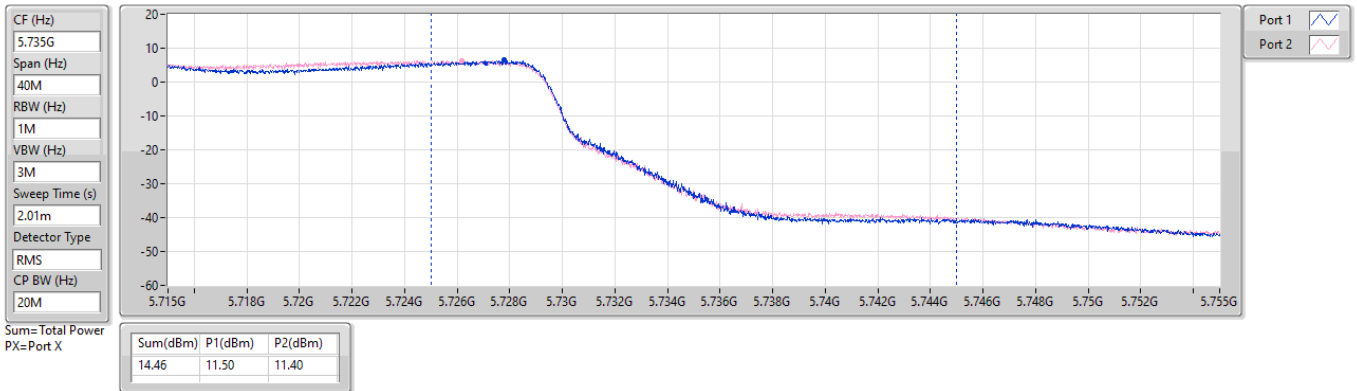

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

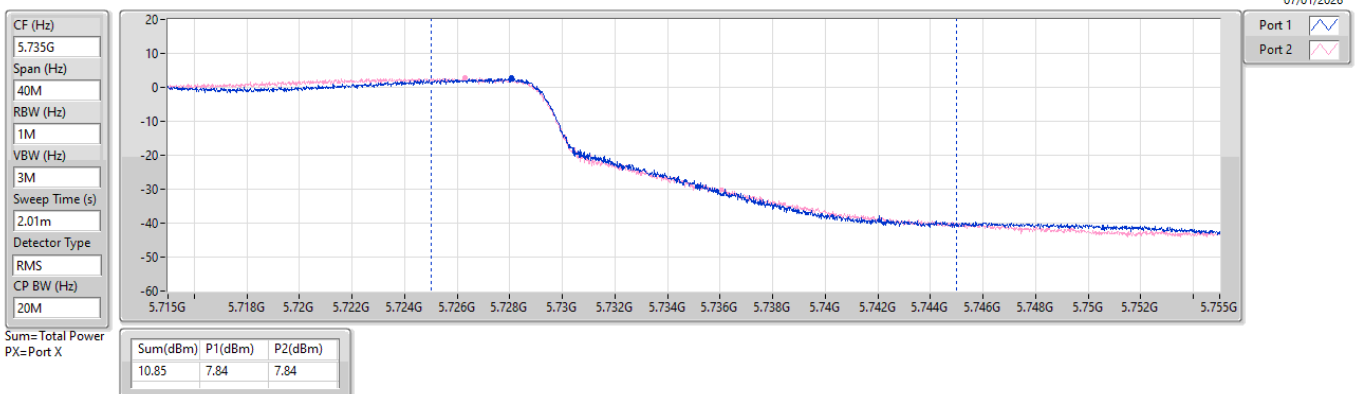

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	21.07	0.12794
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.16	0.13062
802.11be EHT20_Nss1,(MCS0)_2TX	22.20	0.16596
802.11be EHT40_Nss1,(MCS0)_2TX	23.68	0.23335
802.11be EHT80_Nss1,(MCS0)_2TX	23.28	0.21281
802.11be EHT160_Nss1,(MCS0)_2TX	20.80	0.12023
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	20.71	0.11776
802.11be EHT20_Nss1,(MCS0)_2TX	21.69	0.14757
802.11be EHT40_Nss1,(MCS0)_2TX	23.85	0.24266
802.11be EHT80_Nss1,(MCS0)_2TX	23.92	0.24660
802.11be EHT160_Nss1,(MCS0)_2TX	23.79	0.23933
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	13.00	0.01995
802.11be EHT20_Nss1,(MCS0)_2TX	14.03	0.02529
802.11be EHT40_Nss1,(MCS0)_2TX	14.54	0.02844
802.11be EHT80_Nss1,(MCS0)_2TX	10.83	0.01211



Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP [Phi 30°] (dBm)	EIRP [Phi 30°] Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-		
5260MHz	Pass	3.50	17.62	18.40	21.04	23.98		
5300MHz	Pass	3.50	17.56	18.37	20.99	23.98		
5320MHz	Pass	3.50	17.68	18.57	21.16	23.98		
5500MHz	Pass	3.50	17.19	18.16	20.71	23.98		
5580MHz	Pass	3.50	16.94	17.70	20.35	23.98		
5700MHz	Pass	3.50	17.39	17.46	20.44	23.98		
5720MHz Straddle 5.47-5.725GHz	Pass	3.50	17.25	17.63	20.45	23.02		
5720MHz Straddle 5.725-5.85GHz	Pass	3.50	9.84	10.14	13.00	30.00		
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-		
5260MHz	Pass	3.50	18.45	19.63	22.09	23.98		
5300MHz	Pass	3.50	18.32	19.63	22.03	23.98		
5320MHz	Pass	3.50	18.38	19.88	22.20	23.98		
5500MHz	Pass	3.50	17.83	19.01	21.47	23.98		
5580MHz	Pass	3.50	17.65	18.66	21.19	23.98		
5700MHz	Pass	3.50	18.67	18.68	21.69	23.98		
5720MHz Straddle 5.47-5.725GHz	Pass	3.50	18.10	18.18	21.15	22.97		
5720MHz Straddle 5.725-5.85GHz	Pass	3.50	10.74	11.29	14.03	30.00		
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-		
5270MHz	Pass	3.50	20.16	21.13	23.68	23.98		
5310MHz	Pass	3.50	19.33	20.45	22.94	23.98		
5510MHz	Pass	3.50	20.07	21.08	23.61	23.98		
5550MHz	Pass	3.50	20.39	21.24	23.85	23.98		
5670MHz	Pass	3.50	20.54	20.70	23.63	23.98		
5710MHz Straddle 5.47-5.725GHz	Pass	3.50	20.65	20.93	23.80	23.98		
5710MHz Straddle 5.725-5.85GHz	Pass	3.50	11.42	11.64	14.54	30.00		
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-		
5290MHz	Pass	3.50	19.71	20.76	23.28	23.98		
5530MHz	Pass	3.50	20.50	21.28	23.92	23.98		
5610MHz	Pass	3.50	20.23	20.96	23.62	23.98		
5690MHz Straddle 5.47-5.725GHz	Pass	3.50	20.49	20.63	23.57	23.98		
5690MHz Straddle 5.725-5.85GHz	Pass	3.50	7.74	7.89	10.83	30.00		
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-		
5250MHz Straddle 5.15-5.25GHz	Pass	3.50	17.85	18.26	21.07	30.00	19.42	21.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.50	17.43	18.12	20.80	23.98		
5570MHz	Pass	3.50	20.38	21.15	23.79	23.98		

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.15-5.25GHz_TX

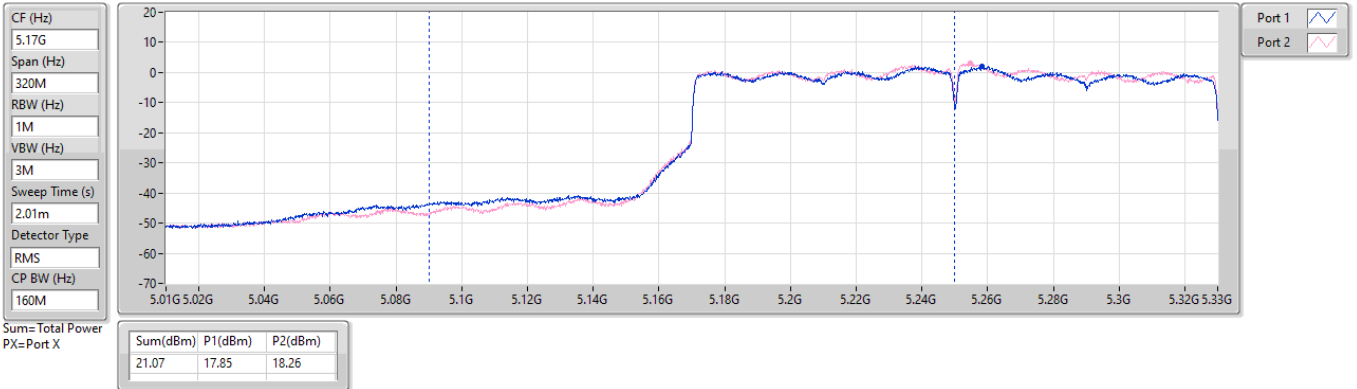

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.25-5.35GHz_TX

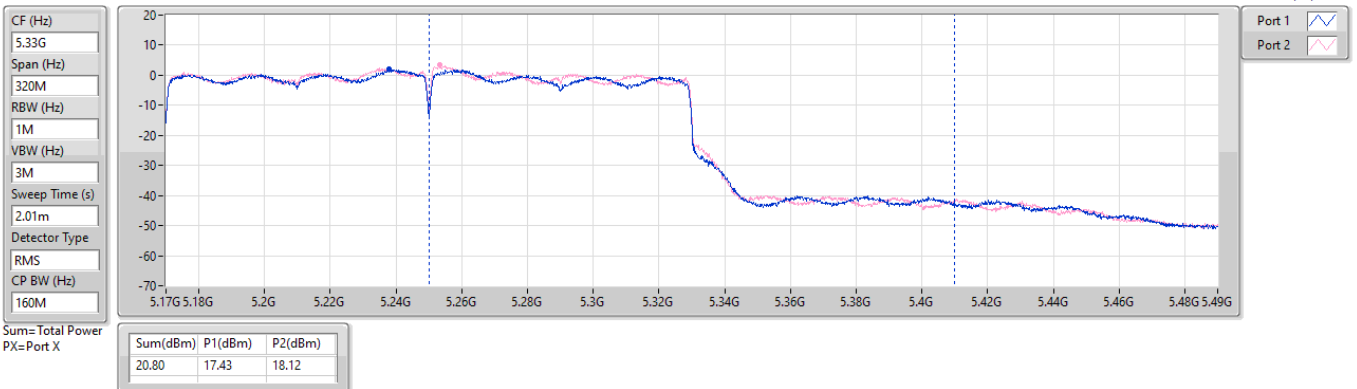

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

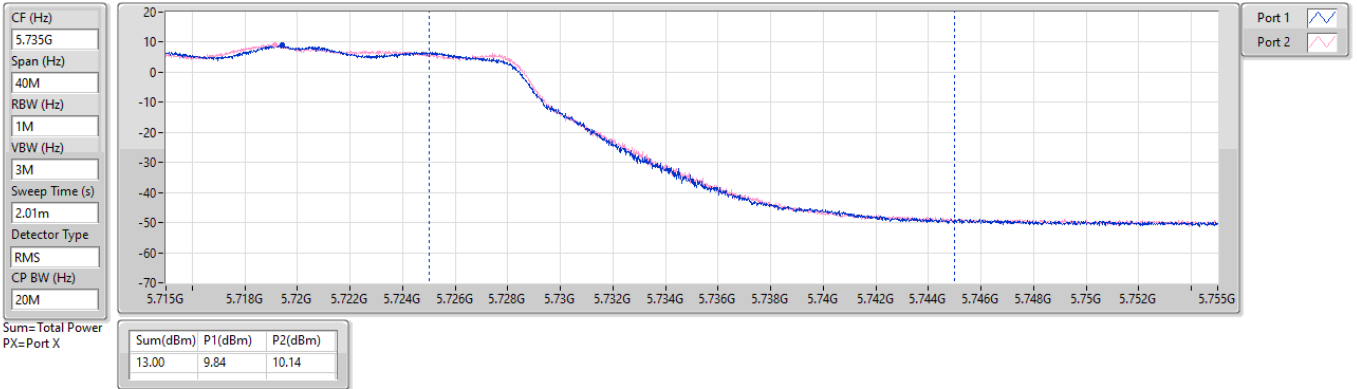

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

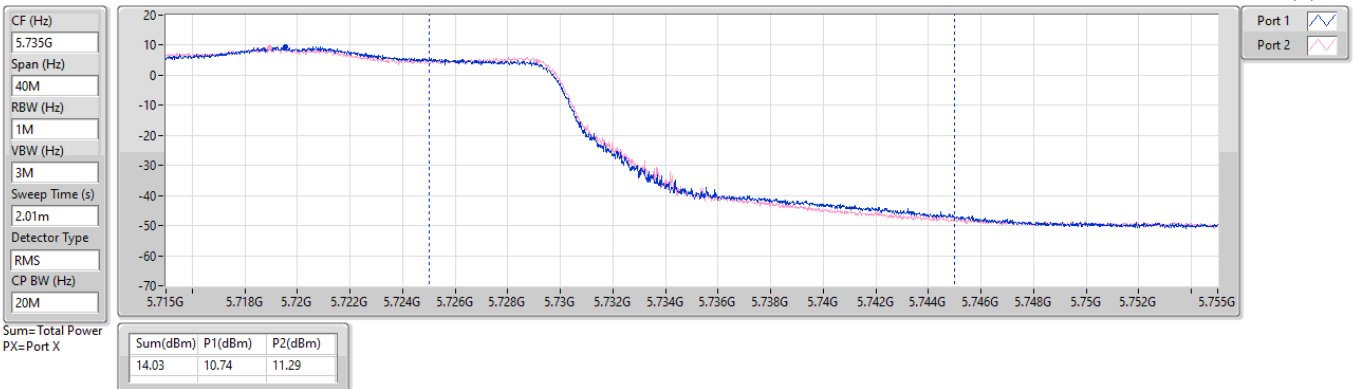

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

AV Power


5710MHz Straddle 5.725-5.85GHz_TX

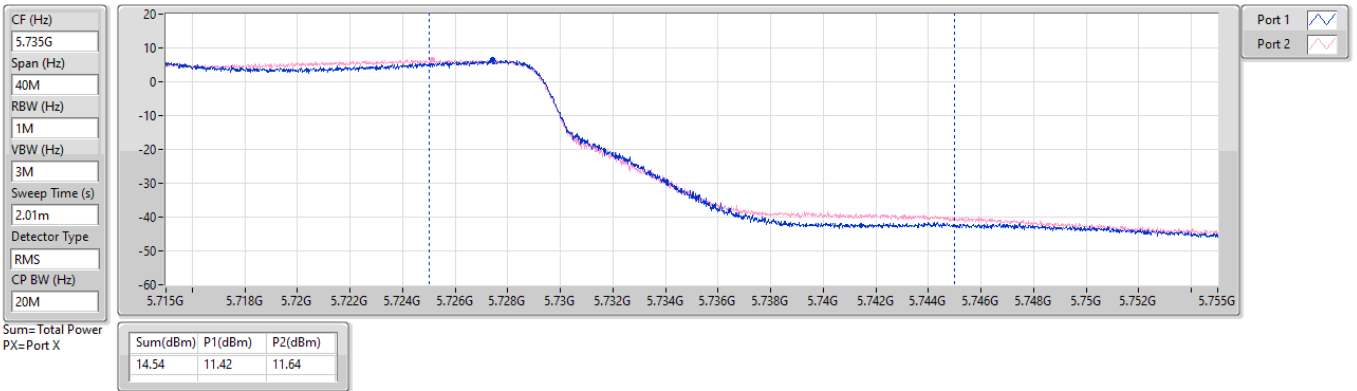

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

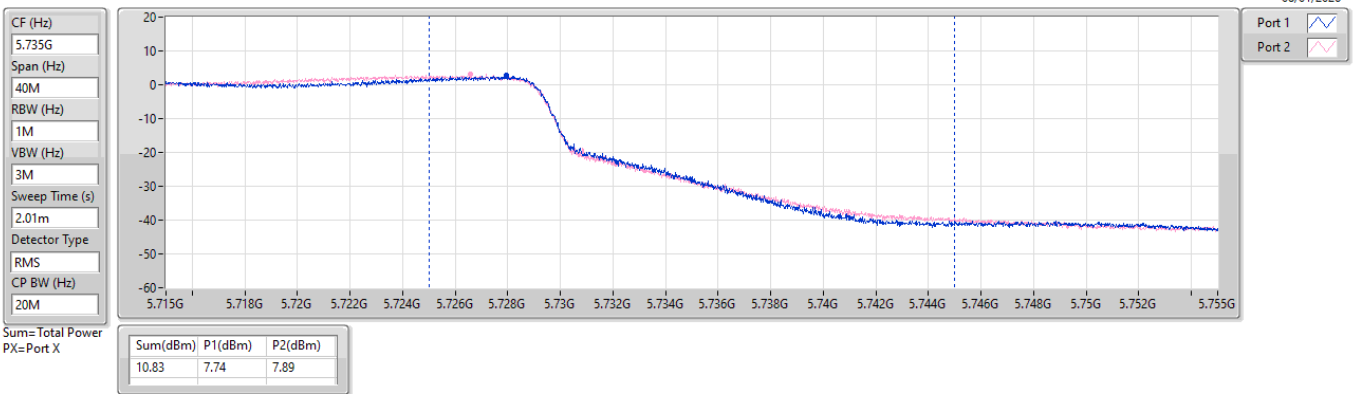

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT160-BF_Nss1,(MCS0)_2TX	18.16	0.06546
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.01	0.12618
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.52	0.14191
802.11be EHT80-BF_Nss1,(MCS0)_2TX	20.17	0.10399
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.62	0.05781
5.47-5.725GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.37	0.13709
802.11be EHT40-BF_Nss1,(MCS0)_2TX	22.39	0.17338
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.16	0.16444
802.11be EHT160-BF_Nss1,(MCS0)_2TX	21.48	0.14060
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	13.59	0.02286
802.11be EHT40-BF_Nss1,(MCS0)_2TX	13.18	0.02080
802.11be EHT80-BF_Nss1,(MCS0)_2TX	9.56	0.00904



Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	7.76	17.35	18.56	21.01	22.22
5300MHz	Pass	7.76	16.96	18.72	20.94	22.22
5320MHz	Pass	7.76	16.68	18.5	20.69	22.22
5500MHz	Pass	6.98	17.55	18.6	21.12	23.00
5580MHz	Pass	6.98	17.51	18.68	21.14	23.00
5700MHz	Pass	6.98	18.21	18.51	21.37	23.00
5720MHz Straddle 5.47-5.725GHz	Pass	6.98	17.77	17.6	20.70	22.04
5720MHz Straddle 5.725-5.85GHz	Pass	6.41	10.14	10.98	13.59	29.59
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	7.76	17.92	19.03	21.52	22.22
5310MHz	Pass	7.76	16.2	17.74	20.05	22.22
5510MHz	Pass	6.98	18.52	19.65	22.13	23.00
5550MHz	Pass	6.98	18.76	19.92	22.39	23.00
5670MHz	Pass	6.98	18.9	19.3	22.11	23.00
5710MHz Straddle 5.47-5.725GHz	Pass	6.98	18.94	19.5	22.24	23.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.41	9.92	10.41	13.18	29.59
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	7.76	16.58	17.67	20.17	22.22
5530MHz	Pass	6.98	18.09	19.23	21.71	23.00
5610MHz	Pass	6.98	18.58	19.55	22.10	23.00
5690MHz Straddle 5.47-5.725GHz	Pass	6.98	18.8	19.47	22.16	23.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.41	6.29	6.8	9.56	29.59
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	7.58	14.92	15.37	18.16	28.42
5250MHz Straddle 5.25-5.35GHz	Pass	7.76	14.3	14.9	17.62	22.22
5570MHz	Pass	6.98	17.94	18.94	21.48	23.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.15-5.25GHz_TX

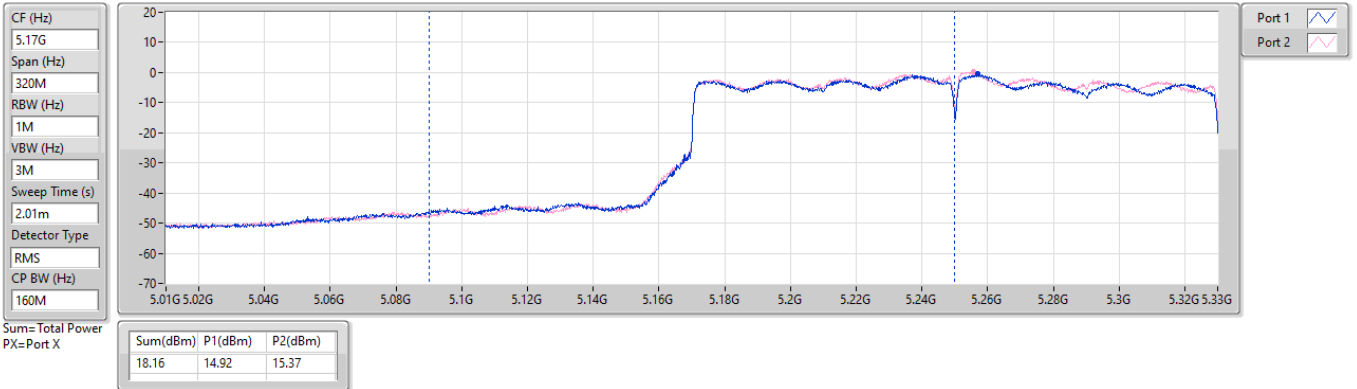

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.25-5.35GHz_TX

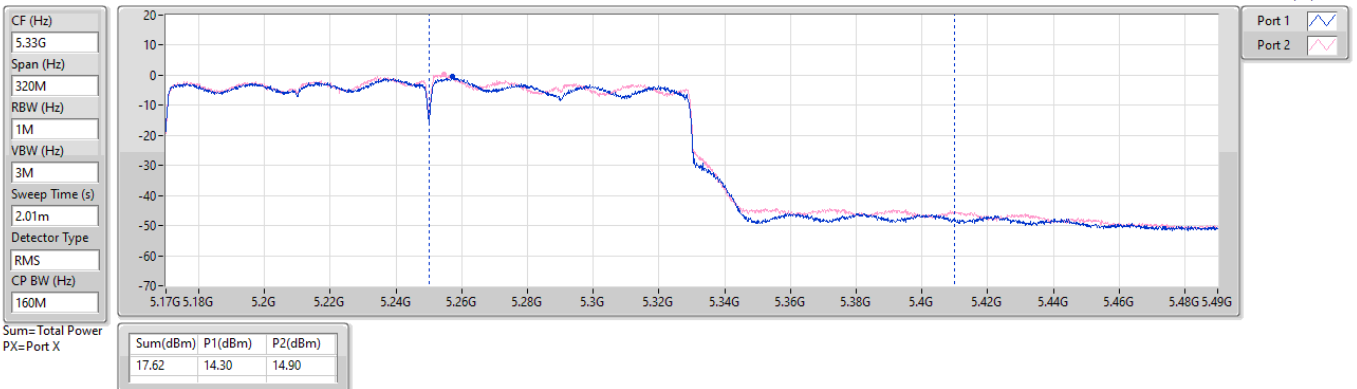

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

AV Power


5690MHz Straddle 5.47-5.725GHz_TX

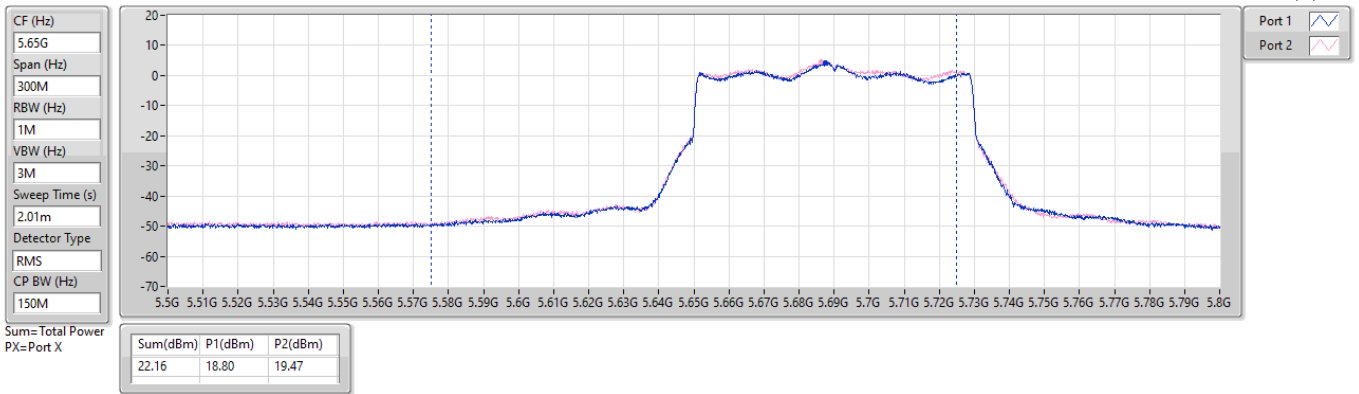

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

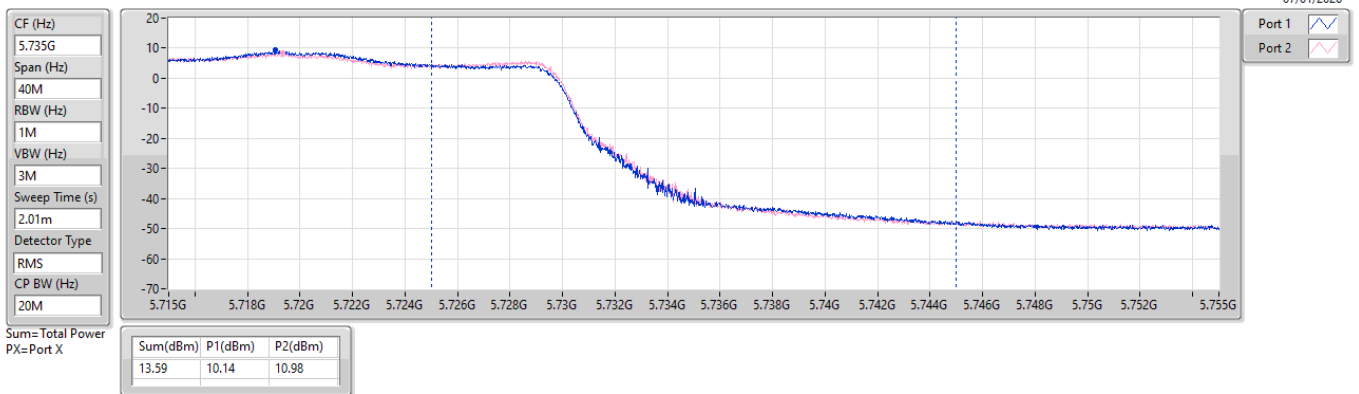

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

AV Power


5710MHz Straddle 5.725-5.85GHz_TX

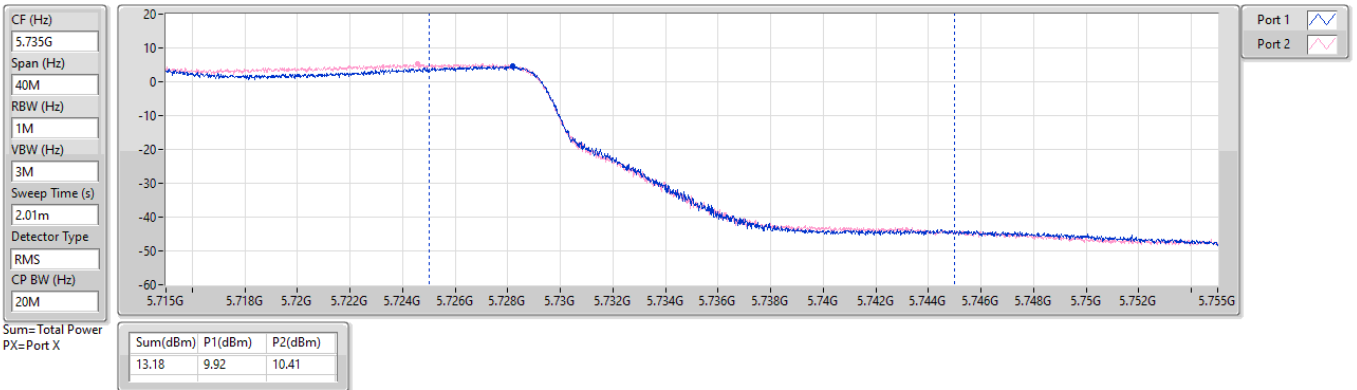

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

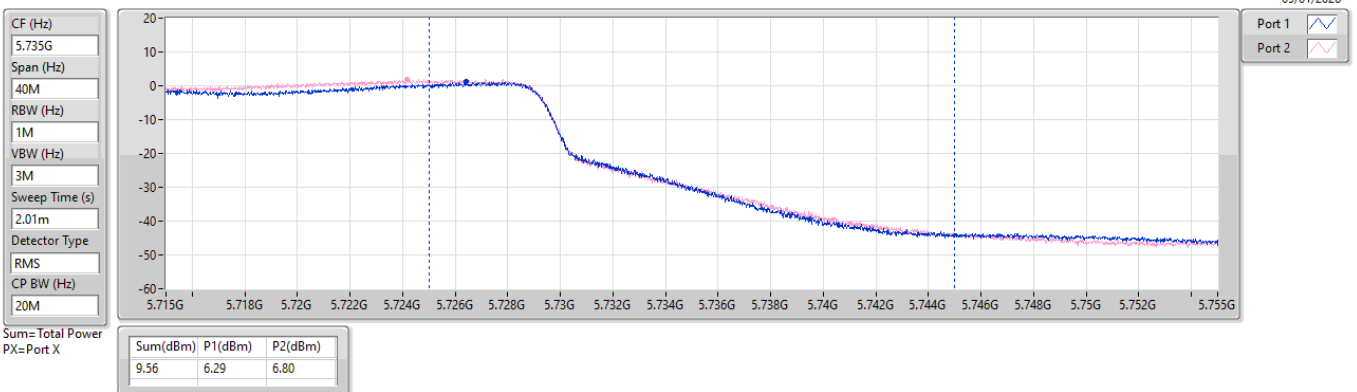

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT160-BF_Nss1,(MCS0)_2TX	21.07	0.12794
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.20	0.16596
802.11be EHT40-BF_Nss1,(MCS0)_2TX	22.94	0.19679
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.71	0.18664
802.11be EHT160-BF_Nss1,(MCS0)_2TX	20.80	0.12023
5.47-5.725GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.69	0.14757
802.11be EHT40-BF_Nss1,(MCS0)_2TX	22.81	0.19099
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.89	0.19454
802.11be EHT160-BF_Nss1,(MCS0)_2TX	22.73	0.18750
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	14.03	0.02529
802.11be EHT40-BF_Nss1,(MCS0)_2TX	13.54	0.02259
802.11be EHT80-BF_Nss1,(MCS0)_2TX	10.11	0.01026



Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	6.51	18.45	19.63	22.09	23.47
5300MHz	Pass	6.51	18.32	19.63	22.03	23.47
5320MHz	Pass	6.51	18.38	19.88	22.20	23.47
5500MHz	Pass	6.51	17.83	19.01	21.47	23.47
5580MHz	Pass	6.51	17.65	18.66	21.19	23.47
5700MHz	Pass	6.51	18.67	18.68	21.69	23.47
5720MHz Straddle 5.47-5.725GHz	Pass	6.51	18.1	18.18	21.15	22.47
5720MHz Straddle 5.725-5.85GHz	Pass	6.51	10.74	11.29	14.03	29.49
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	6.51	19.19	20.1	22.68	23.47
5310MHz	Pass	6.51	19.33	20.45	22.94	23.47
5510MHz	Pass	6.51	19.01	20.07	22.58	23.47
5550MHz	Pass	6.51	19.35	20.21	22.81	23.47
5670MHz	Pass	6.51	19.5	19.62	22.57	23.47
5710MHz Straddle 5.47-5.725GHz	Pass	6.51	19.58	19.63	22.62	23.47
5710MHz Straddle 5.725-5.85GHz	Pass	6.51	10.54	10.51	13.54	29.49
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	6.51	19.17	20.18	22.71	23.47
5530MHz	Pass	6.51	19.5	20.23	22.89	23.47
5610MHz	Pass	6.51	19.15	19.93	22.57	23.47
5690MHz Straddle 5.47-5.725GHz	Pass	6.51	19.73	19.9	22.83	23.47
5690MHz Straddle 5.725-5.85GHz	Pass	6.51	7.07	7.12	10.11	29.49
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.51	17.85	18.26	21.07	29.49
5250MHz Straddle 5.25-5.35GHz	Pass	6.51	17.43	18.12	20.80	23.47
5570MHz	Pass	6.51	19.31	20.09	22.73	23.47

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.15-5.25GHz_TX

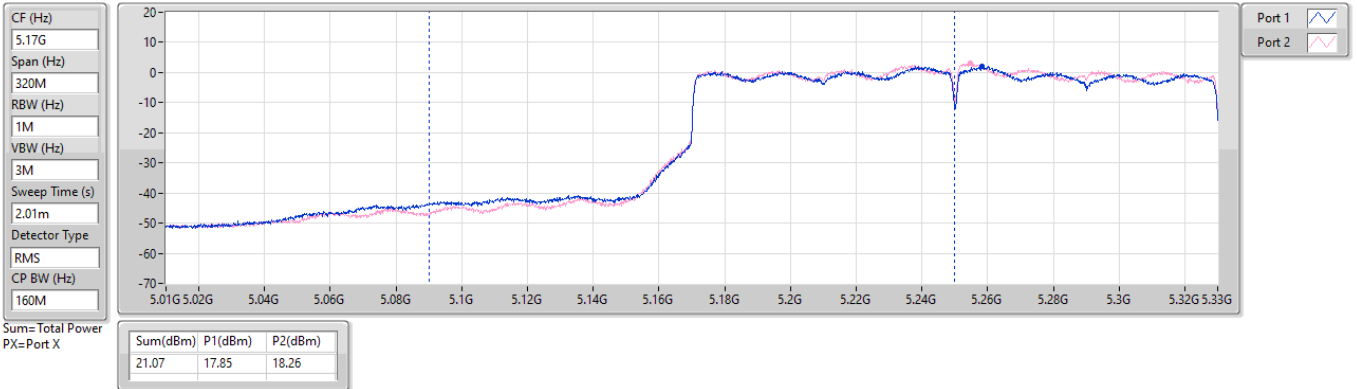

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.25-5.35GHz_TX

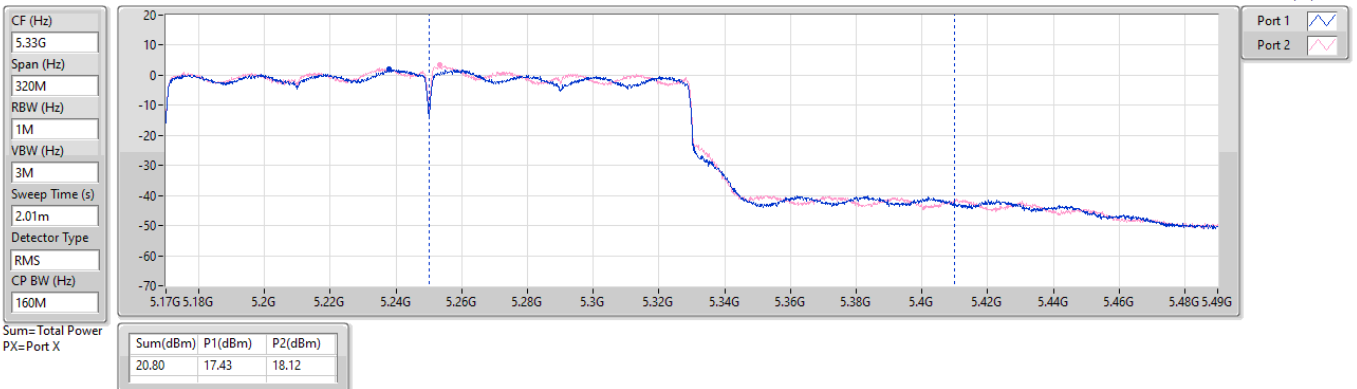

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

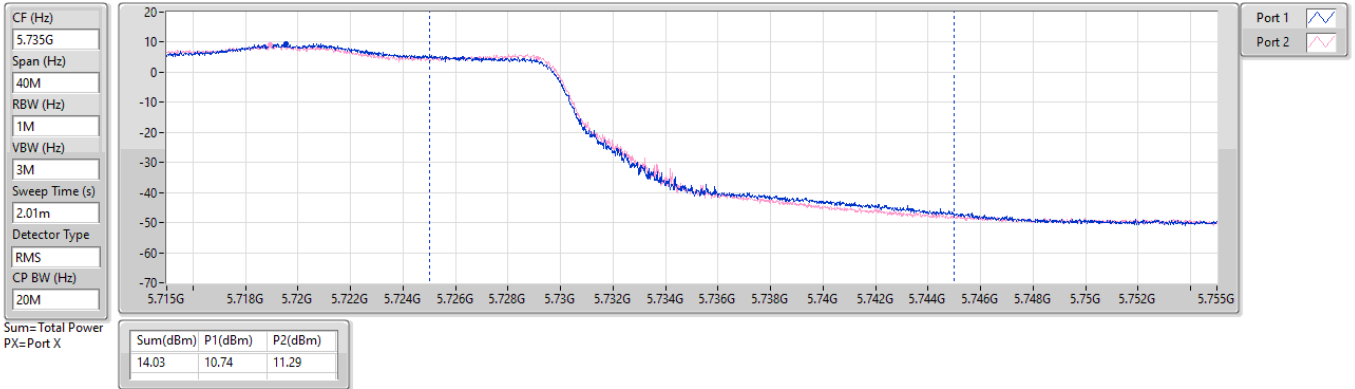


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

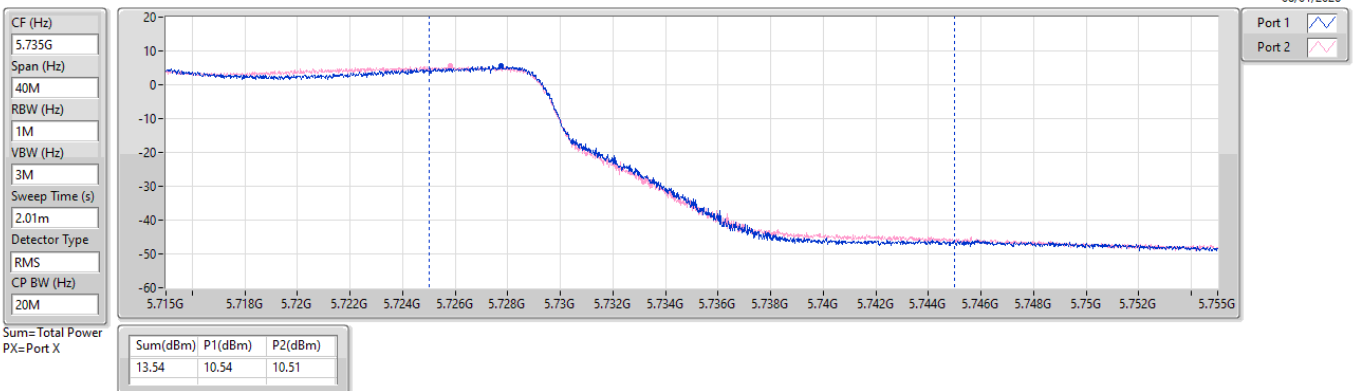

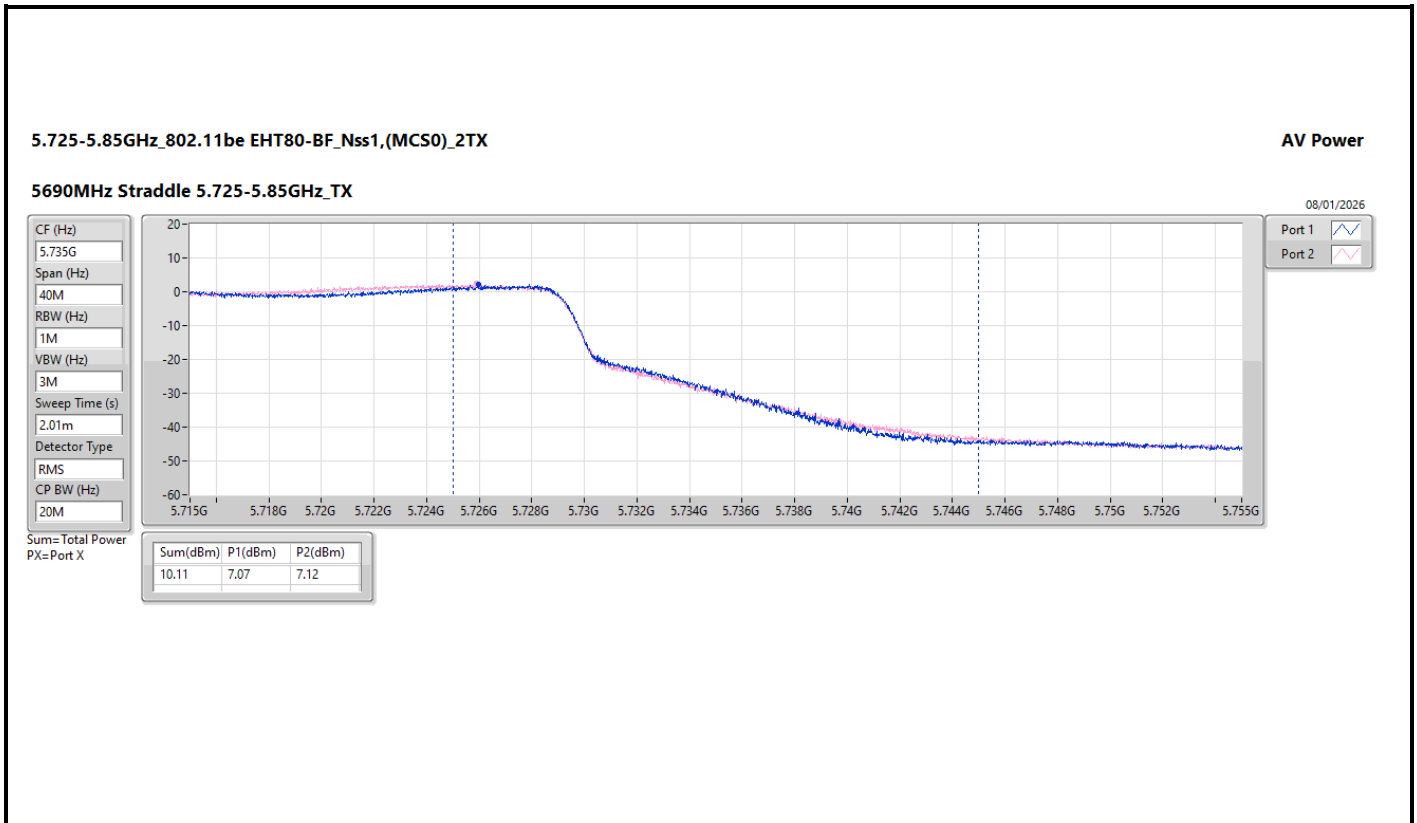



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT160_Nss1,(MCS0)_2TX	0.28
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	9.18
802.11be EHT20_Nss1,(MCS0)_2TX	9.13
802.11be EHT40_Nss1,(MCS0)_2TX	9.04
802.11be EHT80_Nss1,(MCS0)_2TX	2.63
802.11be EHT160_Nss1,(MCS0)_2TX	0.74
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	9.82
802.11be EHT20_Nss1,(MCS0)_2TX	9.83
802.11be EHT40_Nss1,(MCS0)_2TX	9.96
802.11be EHT80_Nss1,(MCS0)_2TX	6.99
802.11be EHT160_Nss1,(MCS0)_2TX	1.72
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	4.98
802.11be EHT20_Nss1,(MCS0)_2TX	4.70
802.11be EHT40_Nss1,(MCS0)_2TX	5.59
802.11be EHT80_Nss1,(MCS0)_2TX	2.06

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	7.76	5.32	6.96	9.13	9.24
5300MHz	Pass	7.76	4.86	7.25	9.04	9.24
5320MHz	Pass	7.76	4.95	7.56	9.18	9.24
5500MHz	Pass	6.98	6.36	7.37	9.82	10.02
5580MHz	Pass	6.98	6.05	7.11	9.60	10.02
5700MHz	Pass	6.98	6.48	6.68	9.59	10.02
5720MHz Straddle 5.47-5.725GHz	Pass	6.98	6.66	6.60	9.62	10.02
5720MHz Straddle 5.725-5.85GHz	Pass	6.41	2.41	1.79	4.98	29.59
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	7.76	4.63	7.30	9.13	9.24
5300MHz	Pass	7.76	4.30	7.55	9.00	9.24
5320MHz	Pass	7.76	4.10	7.38	8.71	9.24
5500MHz	Pass	6.98	5.34	7.61	9.63	10.02
5580MHz	Pass	6.98	5.99	7.41	9.73	10.02
5700MHz	Pass	6.98	6.94	6.66	9.80	10.02
5720MHz Straddle 5.47-5.725GHz	Pass	6.98	7.14	6.48	9.83	10.02
5720MHz Straddle 5.725-5.85GHz	Pass	6.41	1.29	2.35	4.70	29.59
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	7.76	4.34	7.33	9.04	9.24
5310MHz	Pass	7.76	0.31	3.90	5.34	9.24
5510MHz	Pass	6.98	4.56	6.60	8.69	10.02
5550MHz	Pass	6.98	5.96	7.81	9.96	10.02
5670MHz	Pass	6.98	6.63	6.64	9.61	10.02
5710MHz Straddle 5.47-5.725GHz	Pass	6.98	7.07	6.65	9.85	10.02
5710MHz Straddle 5.725-5.85GHz	Pass	6.41	2.81	2.70	5.59	29.59
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	7.76	-1.42	1.00	2.63	9.24
5530MHz	Pass	6.98	1.09	2.90	4.96	10.02
5610MHz	Pass	6.98	3.45	4.49	6.99	10.02
5690MHz Straddle 5.47-5.725GHz	Pass	6.98	3.67	3.74	6.68	10.02
5690MHz Straddle 5.725-5.85GHz	Pass	6.41	-0.79	-0.80	2.06	29.59
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	7.58	-2.79	-2.48	0.28	15.42
5250MHz Straddle 5.25-5.35GHz	Pass	7.76	-2.62	-1.79	0.74	9.24
5570MHz	Pass	6.98	-1.81	-0.68	1.72	10.02


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

07/01/2026

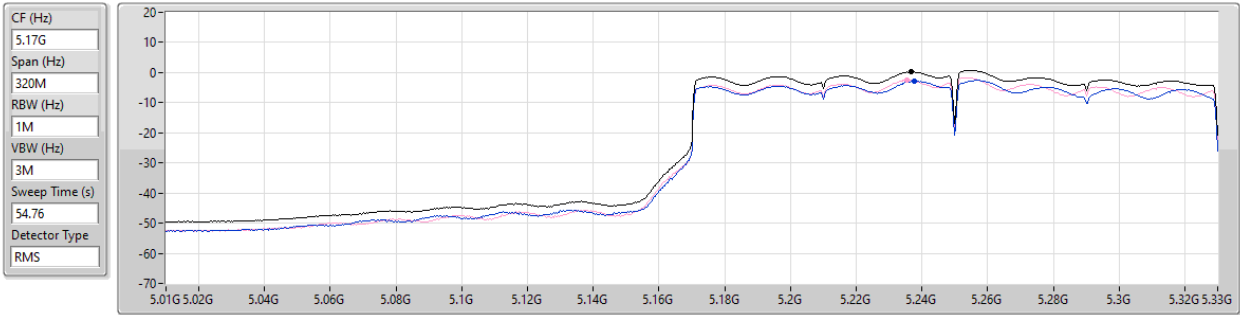


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.28	0.28	-2.79	-2.48

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5320MHz

07/01/2026

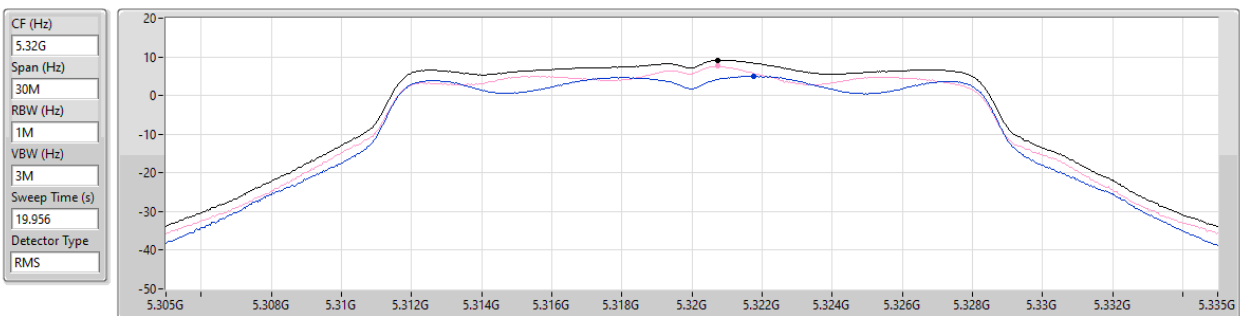

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.18	9.18	4.95	7.56


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5260MHz

07/01/2026

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

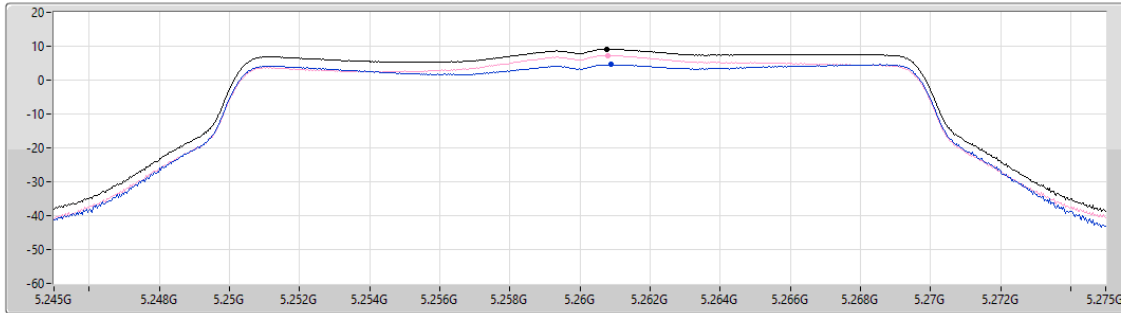

Sum
Port 1
Port 2

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
9.13	9.13	4.63	7.30


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5270MHz

07/01/2026

CF (Hz)
5.27G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

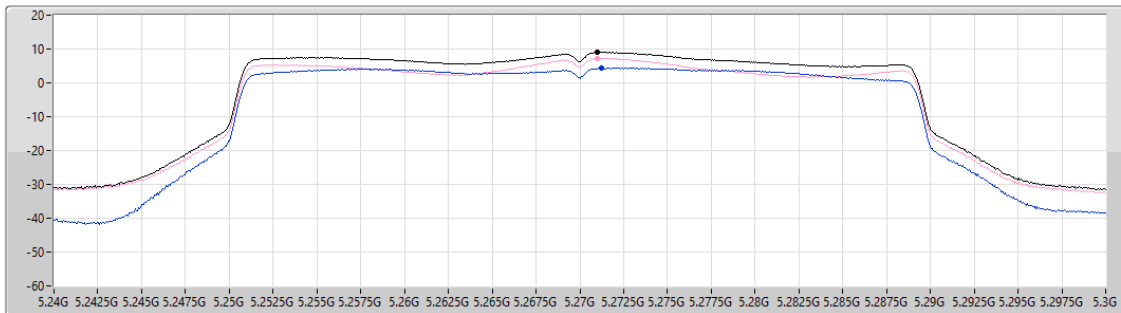

Sum
Port 1
Port 2


Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
9.04	9.04	4.34	7.33

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

07/01/2026

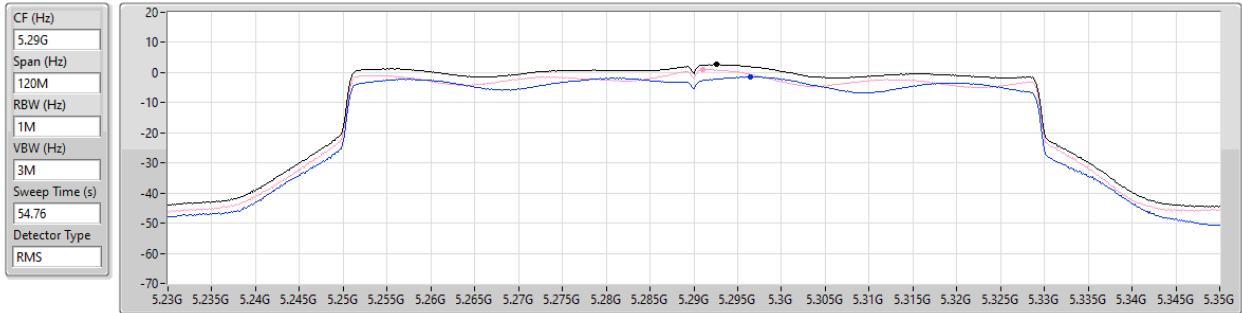


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.63	2.63	-1.42	1.00

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

07/01/2026

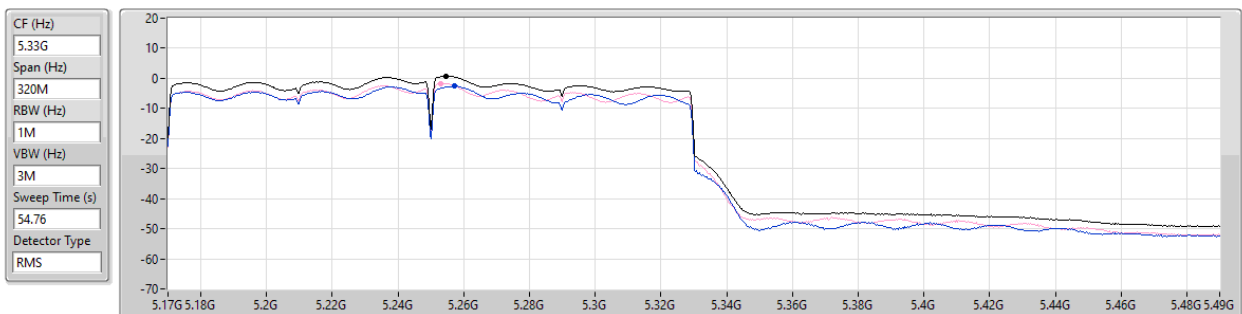

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.74	0.74	-2.62	-1.79

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5500MHz

07/01/2026

CF (Hz)
5.5G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.956

Detector Type
RMS

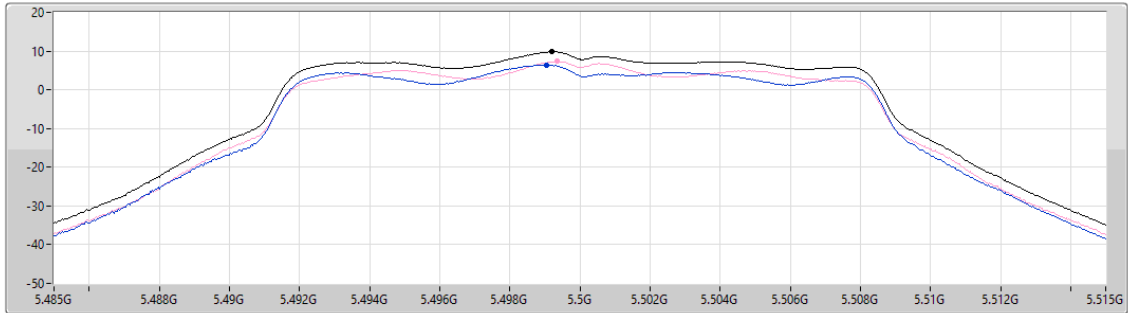

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.82	9.82	6.36	7.37

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

07/01/2026

CF (Hz)
5.71G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

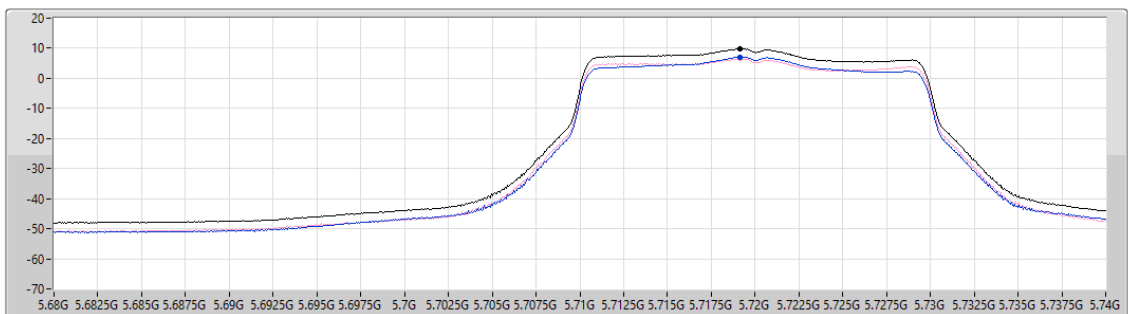

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.83	9.83	7.14	6.48

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5550MHz

07/01/2026

CF (Hz)
5.55G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

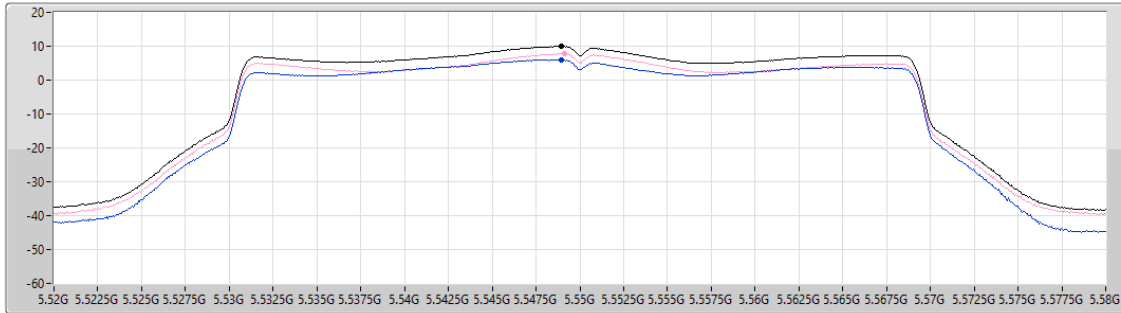

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.96	9.96	9.96	7.81

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5610MHz

07/01/2026

CF (Hz)
5.61G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

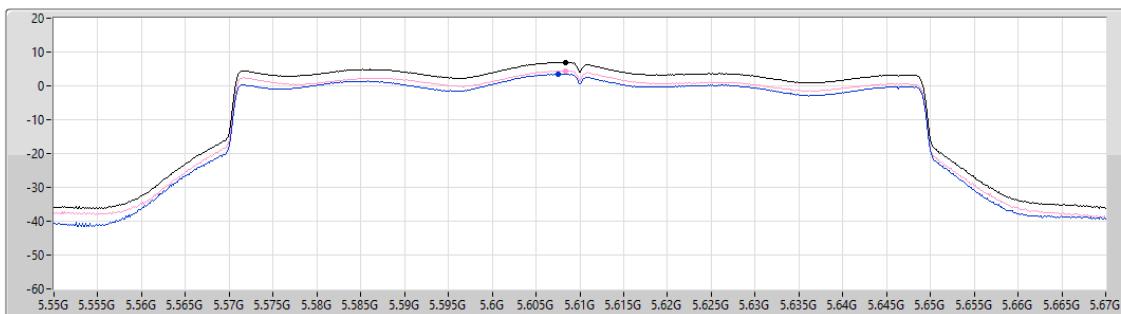

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.99	6.99	3.45	4.49

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5570MHz

07/01/2026

CF (Hz)
5.57G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

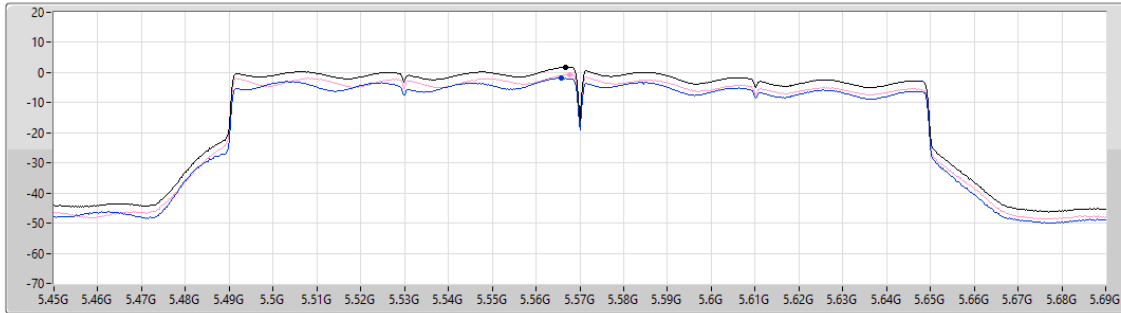

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.72	1.72	-1.81	-0.68

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

07/01/2026

CF (Hz)
5.735G


Span (Hz)
40M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
19.956

Detector Type
RMS

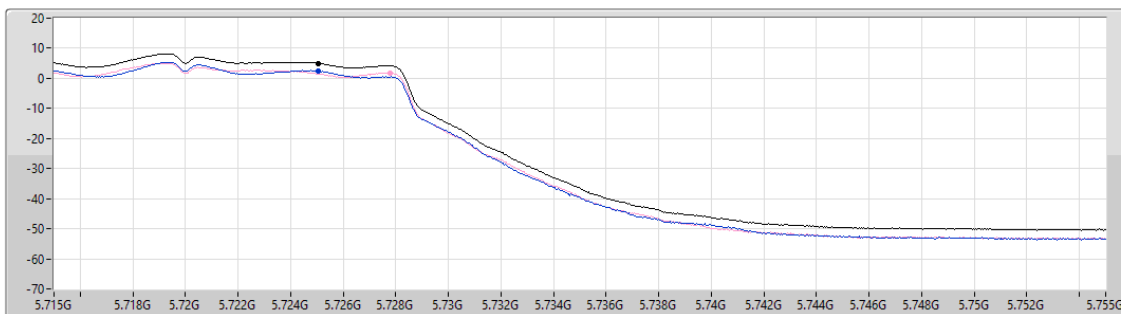

Sum ☒

Port 1 ☒

Port 2 ☒


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.98	4.98	2.41	1.79

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

07/01/2026

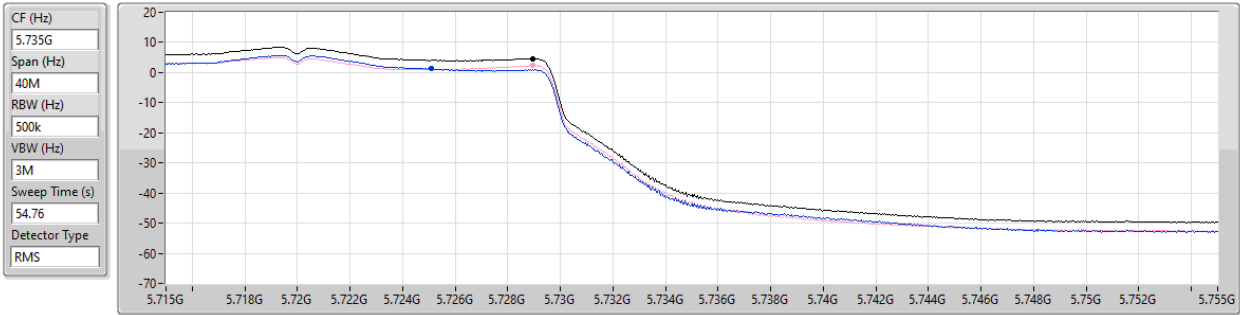


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.70	4.70	1.29	2.35

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX


PSD

5710MHz Straddle 5.725-5.85GHz

07/01/2026

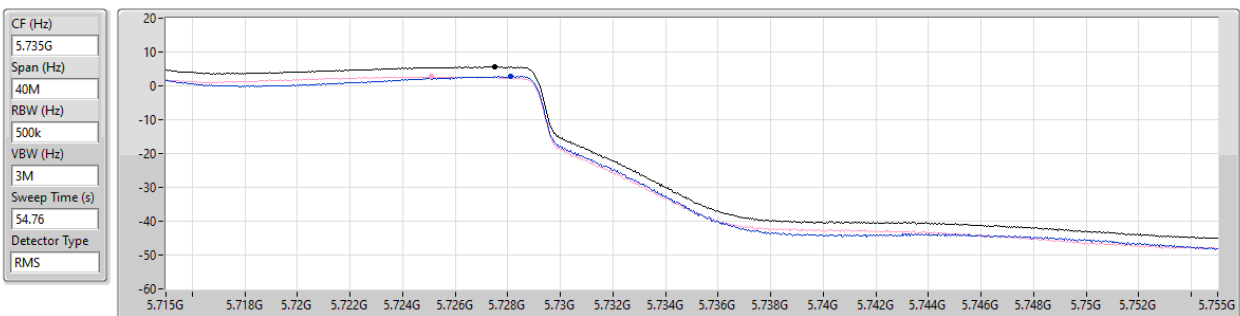

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.59	5.59	2.81	2.70

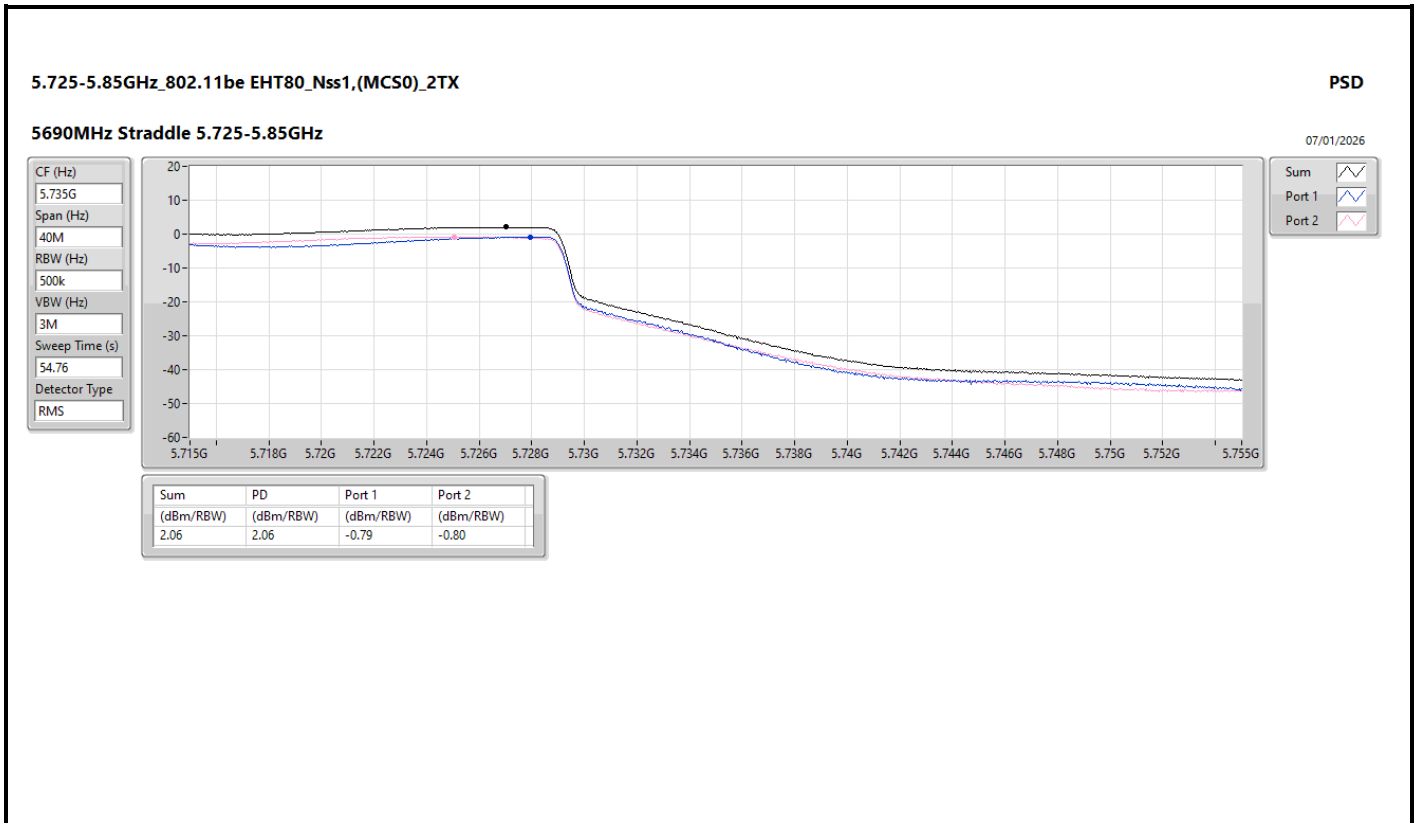



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	1.78
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-0.20
5.25-5.35GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	2.59
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-1.83
5.47-5.725GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	6.63
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	1.23
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	6.56

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-
5210MHz	Pass	7.58	-1.19	-1.27	1.78	15.42
5290MHz	Pass	7.76	-0.65	0.35	2.59	9.24
5530MHz	Pass	6.98	0.17	0.89	3.26	10.02
5610MHz	Pass	6.98	3.41	3.94	6.63	10.02
5690MHz Straddle 5.47-5.725GHz	Pass	6.98	2.01	1.94	4.73	10.02
5690MHz Straddle 5.725-5.85GHz	Pass	6.41	-0.56	-1.44	2.00	29.59
5775MHz	Pass	6.41	3.89	4.14	6.56	29.59
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	7.58	-3.34	-3.09	-0.20	15.42
5250MHz Straddle 5.25-5.35GHz	Pass	7.76	-6.12	-3.69	-1.83	9.24
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-
5570MHz	Pass	6.98	-1.85	-1.34	1.23	10.02

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5210MHz

13/01/2026

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
28.248
Detector Type
RMS

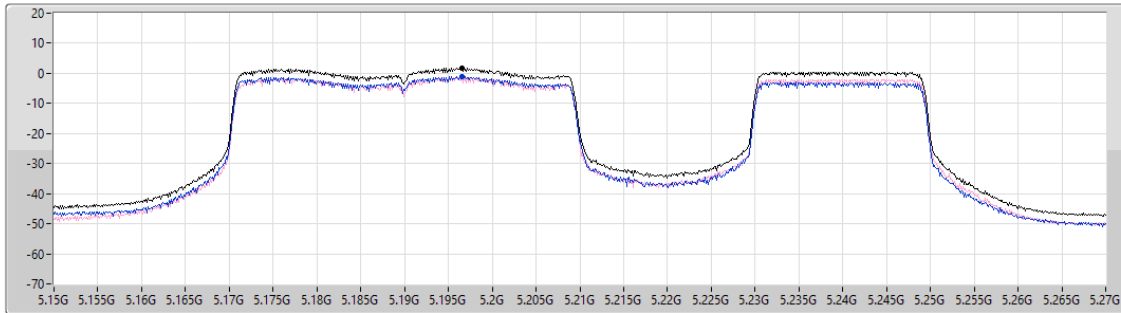

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.78	1.78	-1.19	-1.27


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

14/01/2026

CF (Hz)
5.17G
Span (Hz)
320M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
28.627
Detector Type
RMS

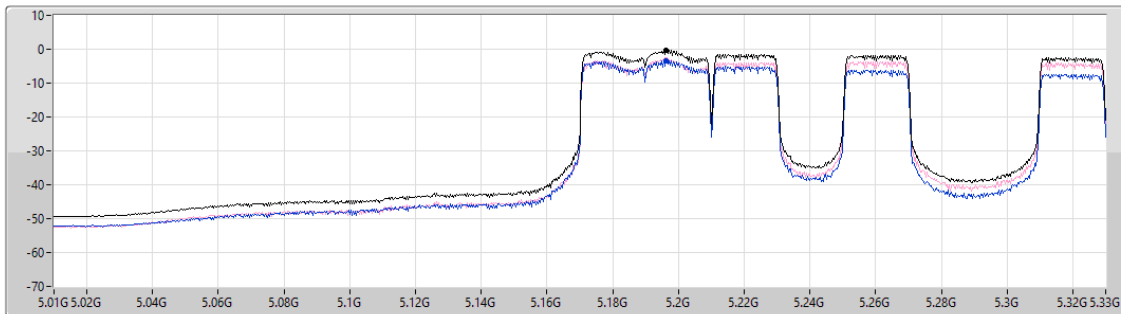


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.20	-0.20	-3.34	-3.09

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5290MHz

14/01/2026

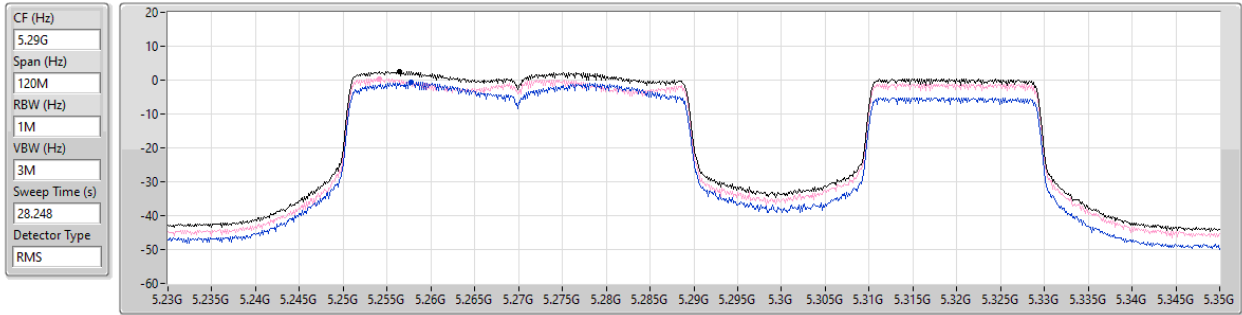


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.59	2.59	-0.65	0.35

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

14/01/2026

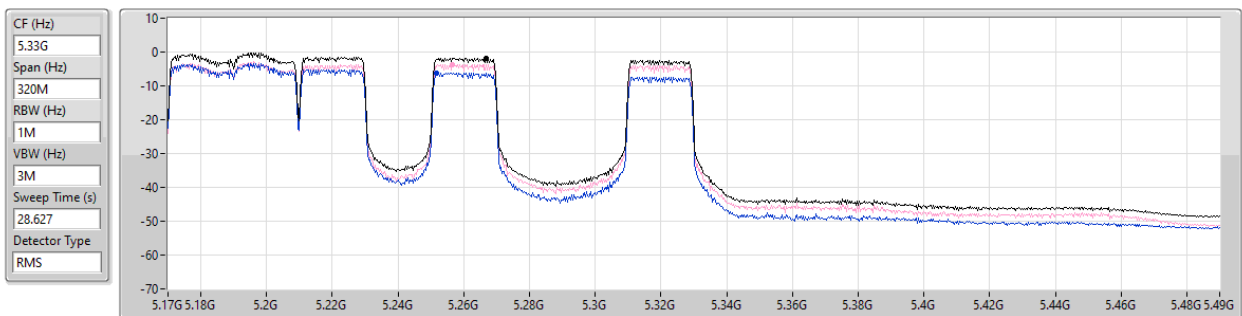


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.83	-1.83	-6.12	-3.69

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5610MHz

14/01/2026

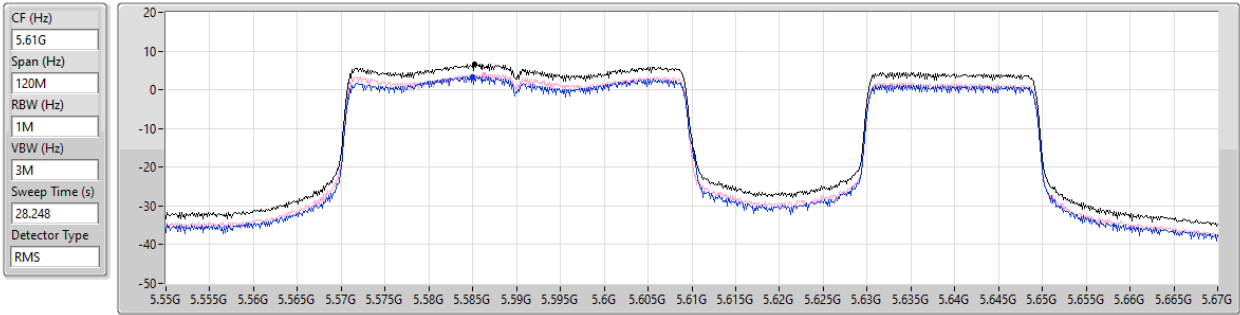


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.63	6.63	3.41	3.94

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX


PSD

5570MHz

26/02/2026

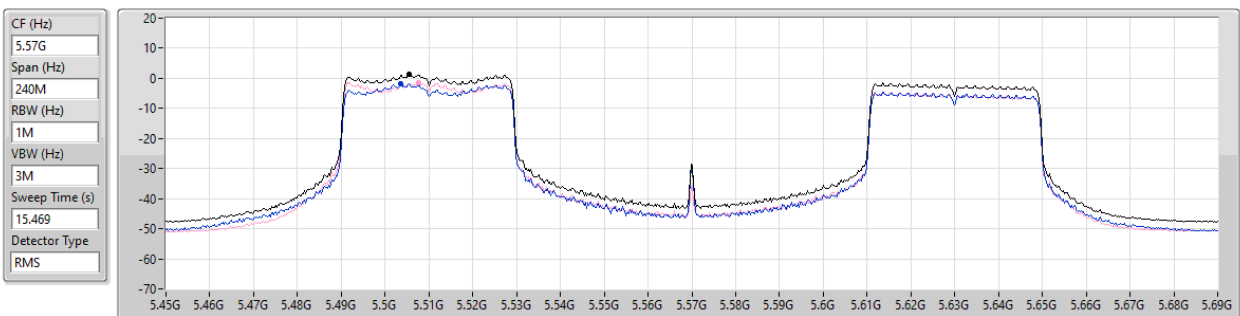

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.23	1.23	-1.85	-1.34

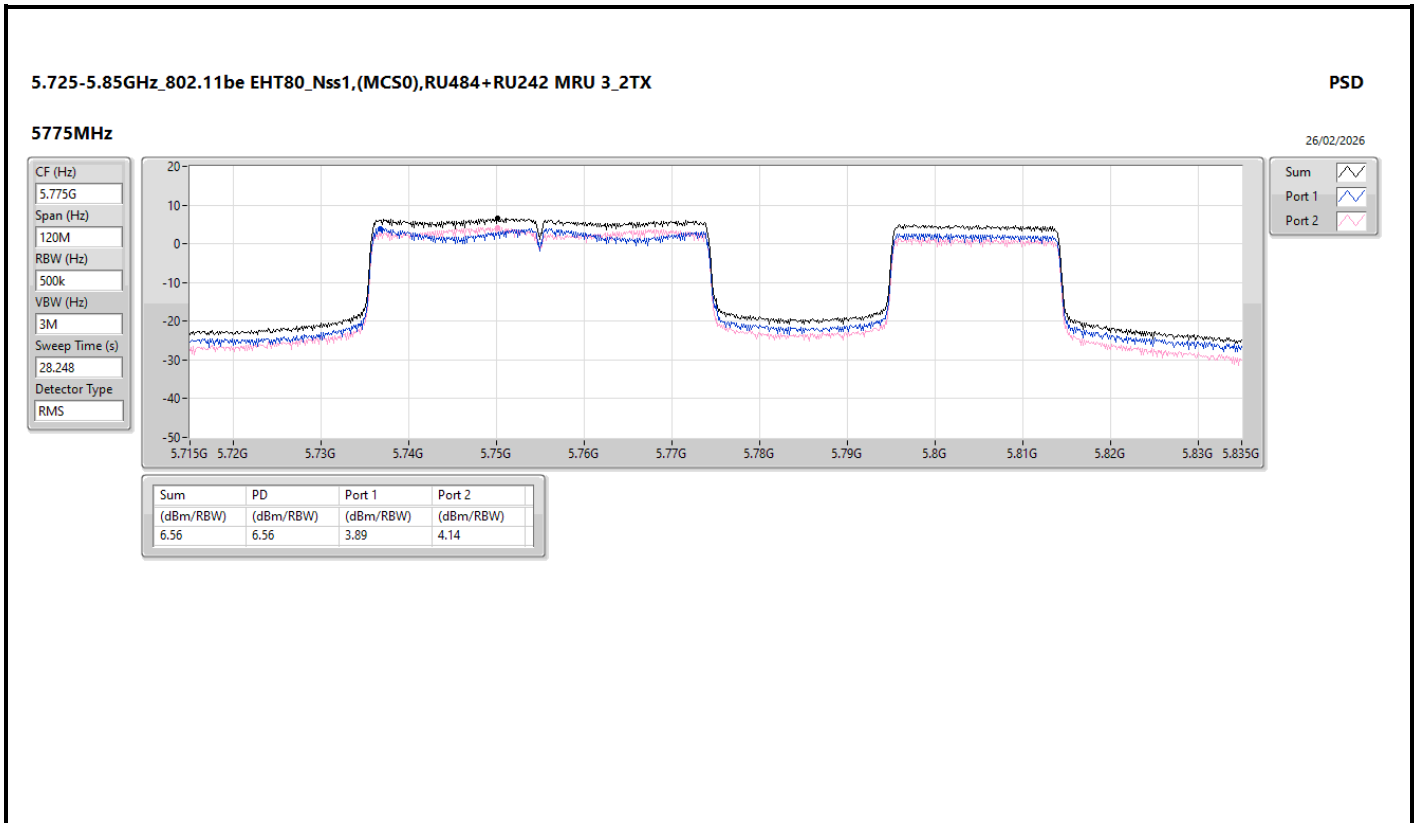



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-2.62
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-5.38
5.25-5.35GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	1.64
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-5.36
5.47-5.725GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	6.22
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX	-5.64
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	4.04

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-	-	-	-
5210MHz	Pass	7.58	-5.52	-5.06	-2.62	15.42
5290MHz	Pass	7.76	-1.73	-0.30	1.64	9.24
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-
5530MHz	Pass	6.98	-10.91	-8.77	-6.70	10.02
5610MHz	Pass	6.98	1.95	2.56	5.27	10.02
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.98	3.48	3.03	6.22	10.02
5690MHz Straddle 5.725-5.85GHz	Pass	6.41	-1.14	-1.13	1.74	29.59
5775MHz	Pass	6.41	1.34	0.97	4.04	29.59
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	7.58	-8.88	-8.26	-5.85	15.42
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	7.58	-8.53	-7.84	-5.38	15.42
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	7.76	-8.92	-7.34	-5.36	9.24
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	7.76	-10.55	-9.44	-7.61	9.24
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_2TX	-	-	-	-	-	-
5570MHz	Pass	6.98	-13.92	-12.89	-10.41	10.02
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX	-	-	-	-	-	-
5570MHz	Pass	6.98	-9.18	-8.16	-5.64	10.02

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

PSD

5210MHz

26/02/2026

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

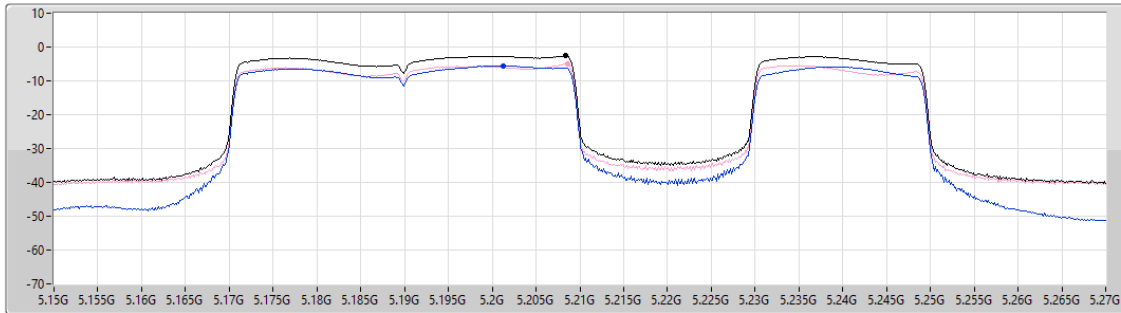

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.62	-2.62	-5.52	-5.06


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

26/02/2026

CF (Hz)
5.17G
Span (Hz)
320M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

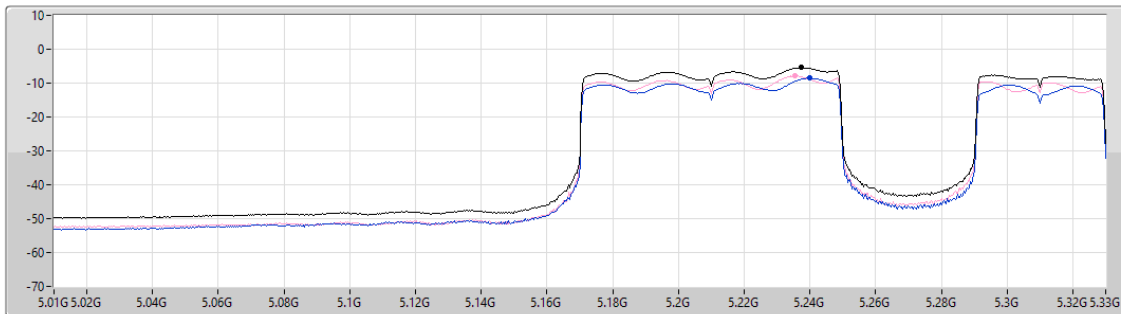

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.38	-5.38	-8.53	-7.84

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

PSD

5290MHz

26/02/2026

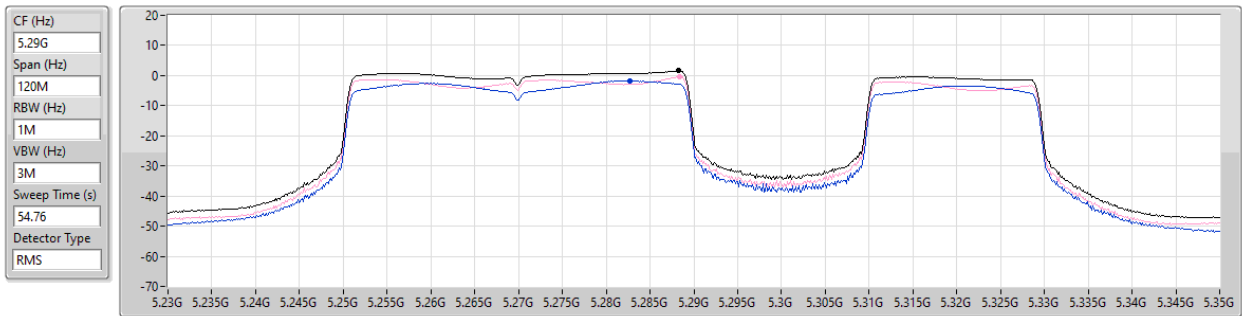


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.64	1.64	-1.73	-0.30

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

26/02/2026

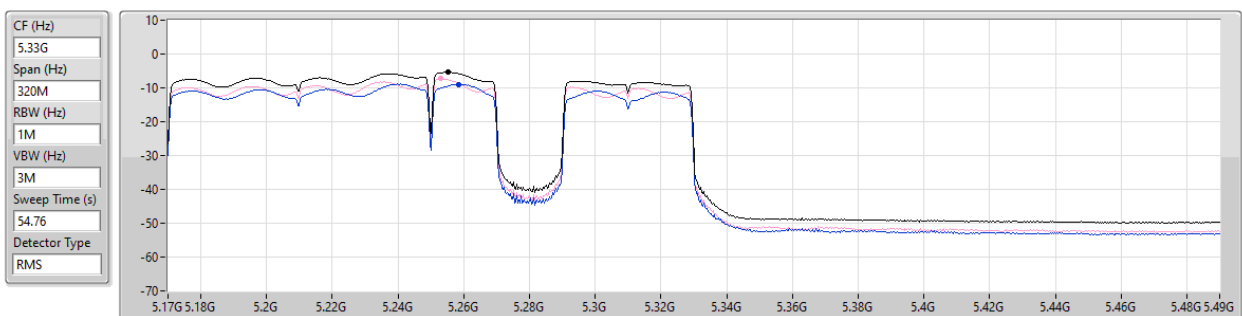


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.36	-5.36	-8.92	-7.34

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

13/01/2026

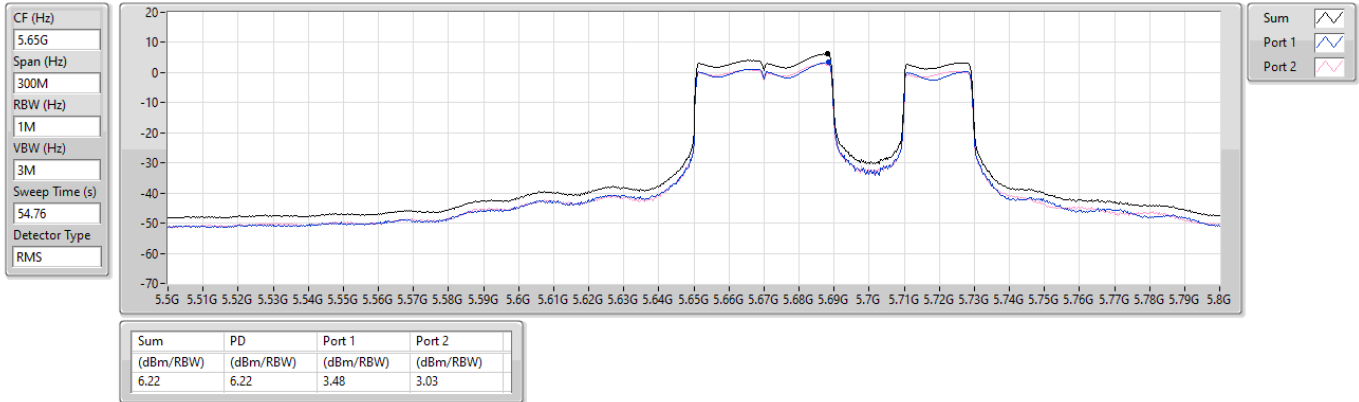


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX

PSD

5570MHz

26/02/2026

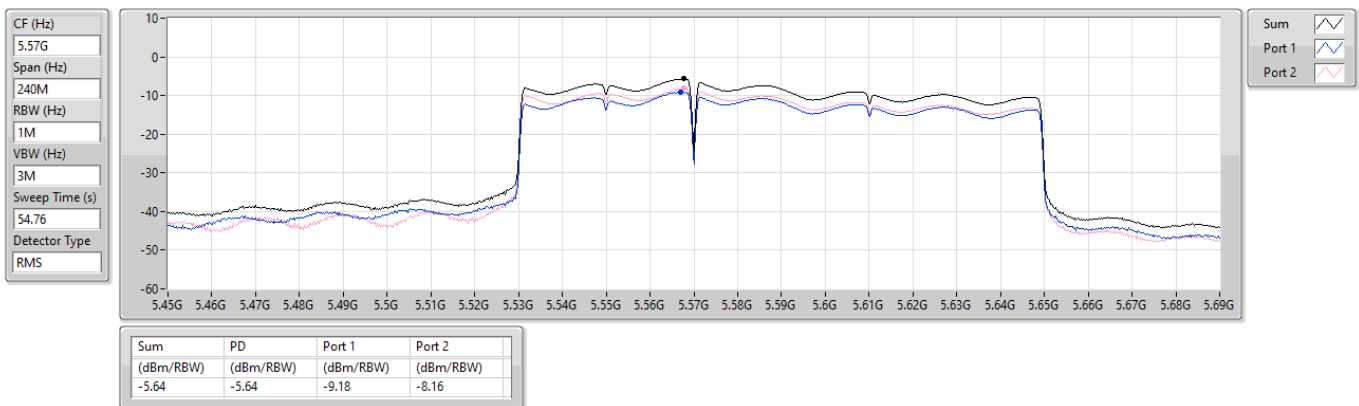


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

PSD

5775MHz

26/02/2026

CF (Hz)
5.775G
Span (Hz)
120M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

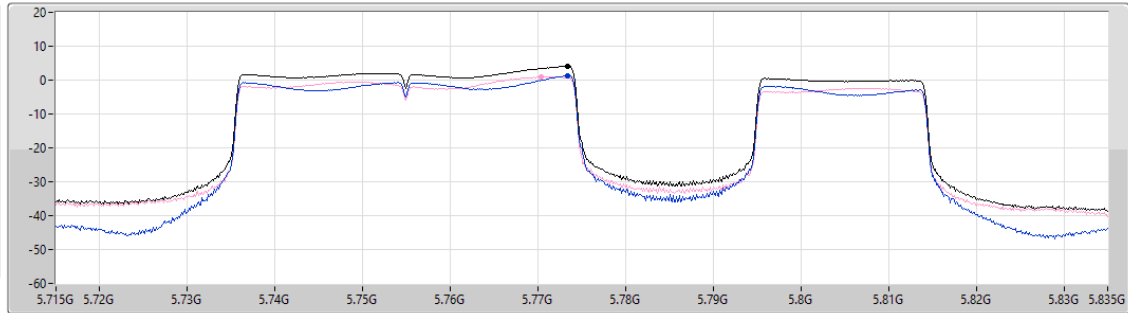

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.04	4.04	1.34	0.97

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT160_Nss1,(MCS0)_2TX	2.90
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	10.38
802.11be EHT20_Nss1,(MCS0)_2TX	10.45
802.11be EHT40_Nss1,(MCS0)_2TX	8.92
802.11be EHT80_Nss1,(MCS0)_2TX	5.78
802.11be EHT160_Nss1,(MCS0)_2TX	3.33
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	10.47
802.11be EHT20_Nss1,(MCS0)_2TX	10.47
802.11be EHT40_Nss1,(MCS0)_2TX	10.14
802.11be EHT80_Nss1,(MCS0)_2TX	7.23
802.11be EHT160_Nss1,(MCS0)_2TX	4.08
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	6.08
802.11be EHT20_Nss1,(MCS0)_2TX	4.97
802.11be EHT40_Nss1,(MCS0)_2TX	5.86
802.11be EHT80_Nss1,(MCS0)_2TX	2.09

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	6.51	6.39	8.34	10.38	10.49
5300MHz	Pass	6.51	6.03	8.32	10.11	10.49
5320MHz	Pass	6.51	6.37	8.60	10.28	10.49
5500MHz	Pass	6.51	6.94	7.98	10.43	10.49
5580MHz	Pass	6.51	6.77	7.58	10.19	10.49
5700MHz	Pass	6.51	7.18	7.14	10.12	10.49
5720MHz Straddle 5.47-5.725GHz	Pass	6.51	7.46	7.55	10.47	10.49
5720MHz Straddle 5.725-5.85GHz	Pass	6.51	3.47	2.68	6.08	29.49
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	6.51	5.80	8.44	10.24	10.49
5300MHz	Pass	6.51	5.80	8.61	10.22	10.49
5320MHz	Pass	6.51	6.10	8.90	10.45	10.49
5500MHz	Pass	6.51	6.24	8.27	10.37	10.49
5580MHz	Pass	6.51	6.49	7.63	10.07	10.49
5700MHz	Pass	6.51	7.75	7.17	10.47	10.49
5720MHz Straddle 5.47-5.725GHz	Pass	6.51	7.59	7.03	10.28	10.49
5720MHz Straddle 5.725-5.85GHz	Pass	6.51	2.12	2.58	4.97	29.49
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	6.51	4.14	7.21	8.92	10.49
5310MHz	Pass	6.51	3.51	6.81	8.35	10.49
5510MHz	Pass	6.51	5.88	7.60	9.81	10.49
5550MHz	Pass	6.51	6.46	7.77	10.12	10.49
5670MHz	Pass	6.51	6.93	6.64	9.77	10.49
5710MHz Straddle 5.47-5.725GHz	Pass	6.51	7.32	6.93	10.14	10.49
5710MHz Straddle 5.725-5.85GHz	Pass	6.51	2.95	3.03	5.86	29.49
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	6.51	1.79	4.17	5.78	10.49
5530MHz	Pass	6.51	3.69	4.89	7.23	10.49
5610MHz	Pass	6.51	3.58	4.30	6.94	10.49
5690MHz Straddle 5.47-5.725GHz	Pass	6.51	3.85	3.62	6.71	10.49
5690MHz Straddle 5.725-5.85GHz	Pass	6.51	-0.80	-0.76	2.09	29.49
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.51	-0.04	0.33	2.90	16.49
5250MHz Straddle 5.25-5.35GHz	Pass	6.51	-0.07	1.22	3.33	10.49
5570MHz	Pass	6.51	0.64	1.51	4.08	10.49


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

08/01/2026

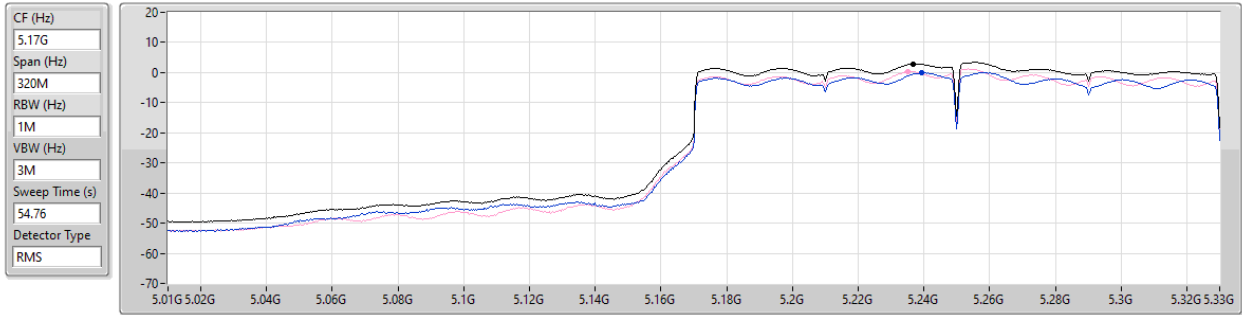


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.90	2.90	-0.04	0.33

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5260MHz

09/01/2026

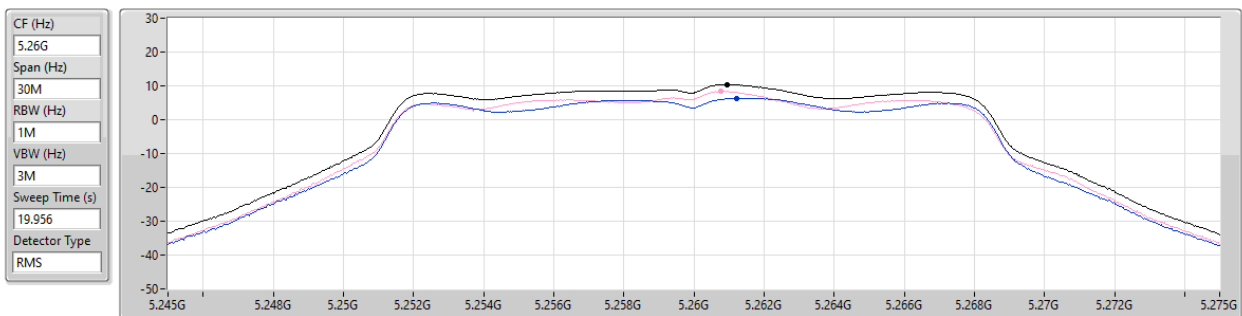

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.38	10.38	6.39	8.34


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5320MHz

09/01/2026

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

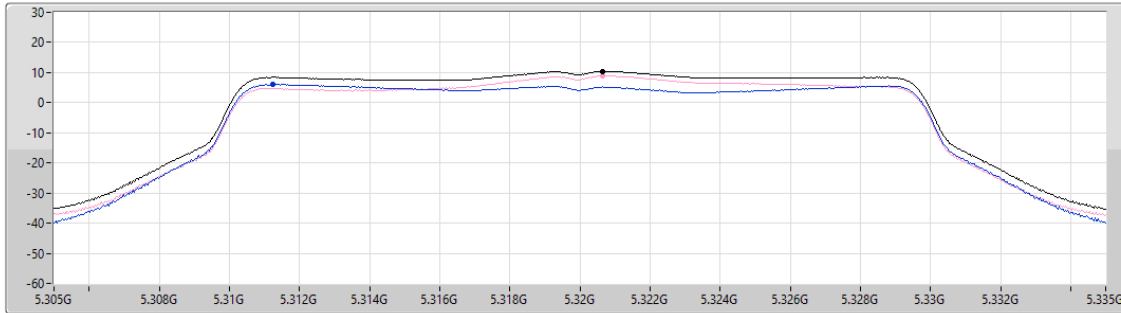

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.45	10.45	6.10	8.90


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5270MHz

08/01/2026

CF (Hz)
5.27G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

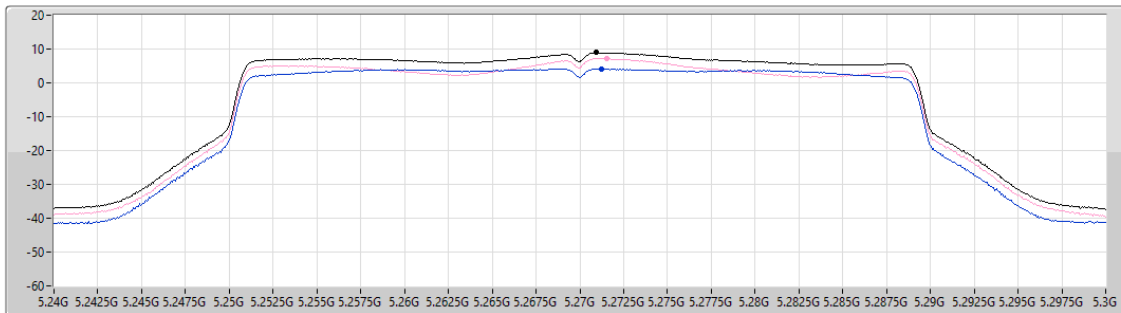

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.92	8.92	4.14	7.21

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

08/01/2026

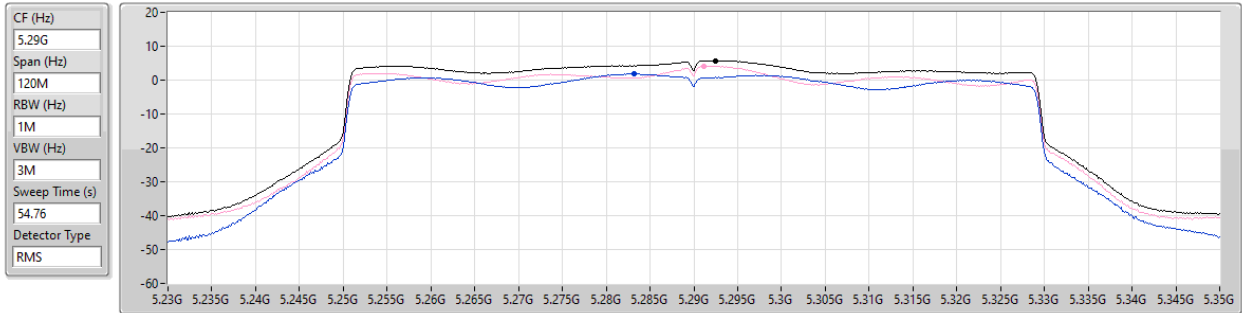


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.78	5.78	1.79	4.17

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

08/01/2026

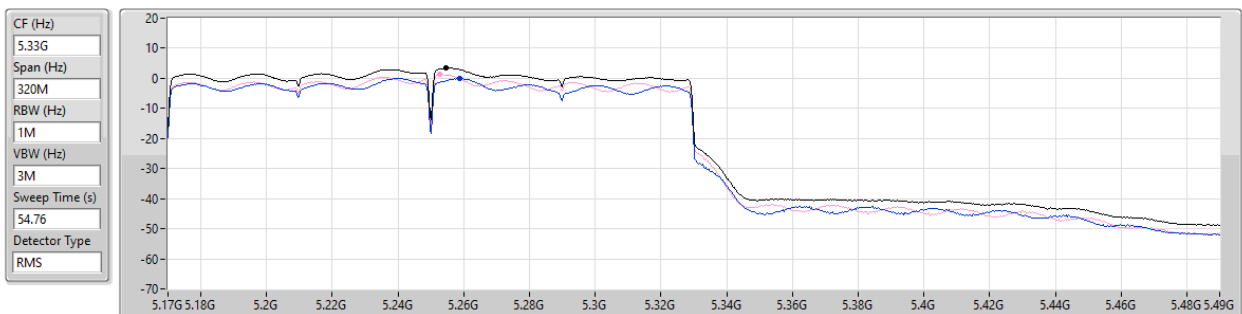


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.33	3.33	-0.07	1.22

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

09/01/2026

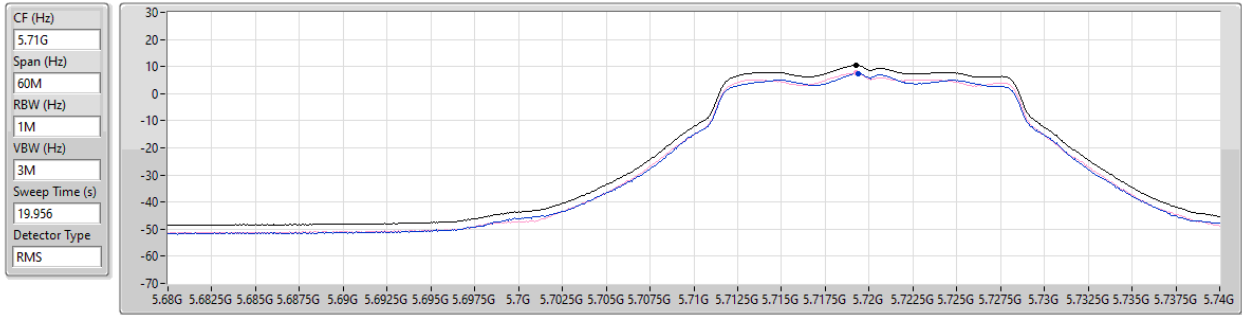


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.47	10.47	7.46	7.55

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5700MHz

09/01/2026

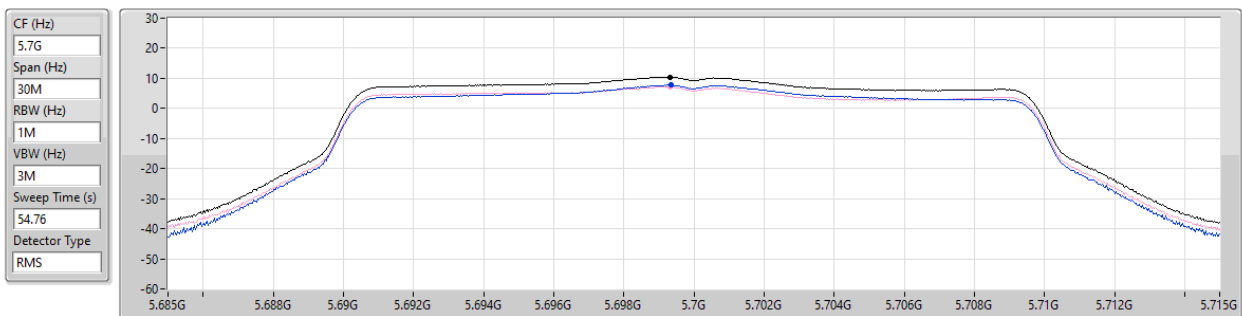


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.47	10.47	7.75	7.17

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

08/01/2026

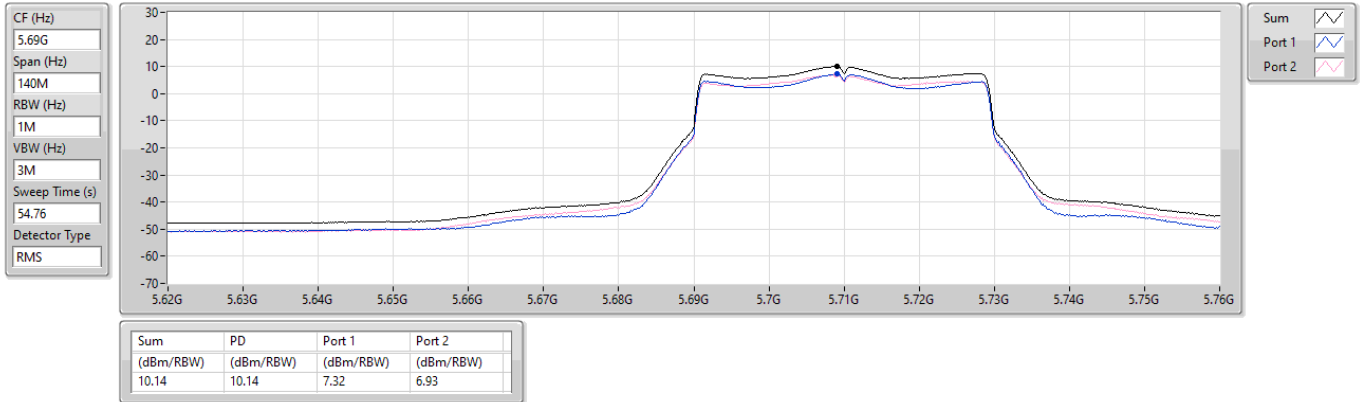


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5530MHz

08/01/2026

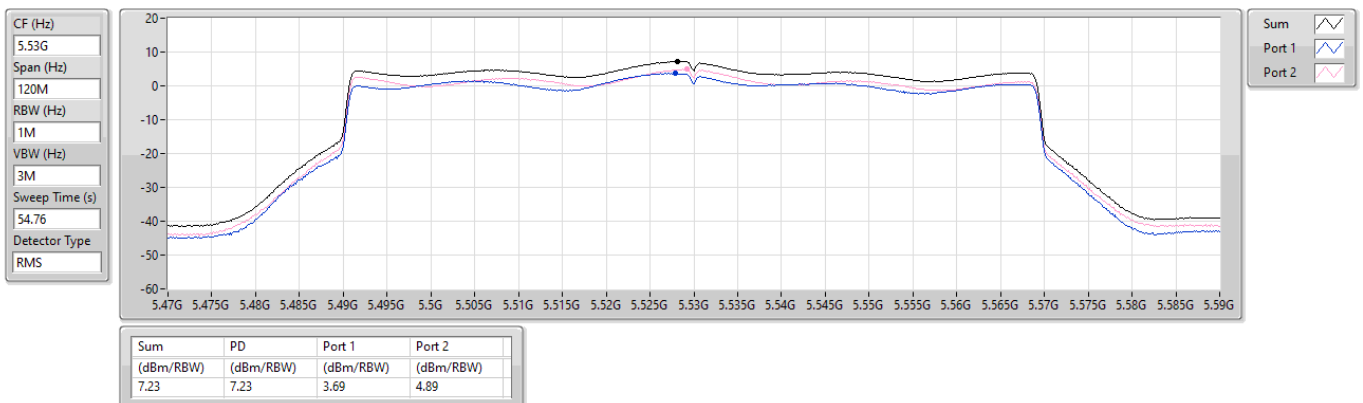

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5570MHz

08/01/2026

CF (Hz)
5.57G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

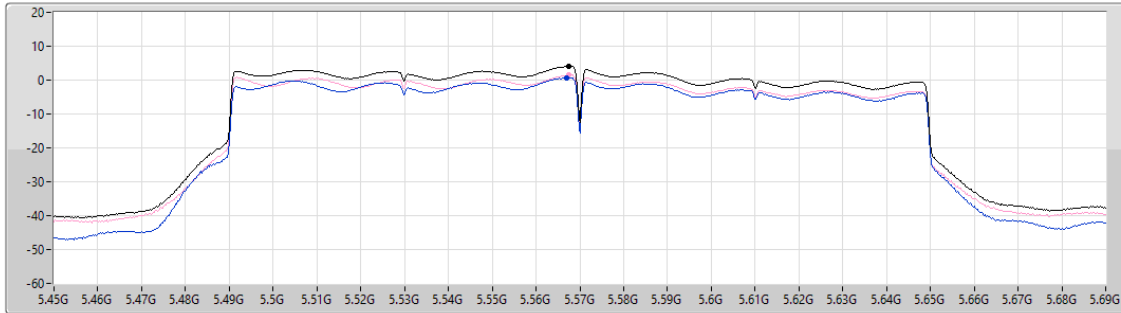

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.08	4.08	0.64	1.51

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

09/01/2026

CF (Hz)
5.735G


Span (Hz)
40M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
19.956

Detector Type
RMS

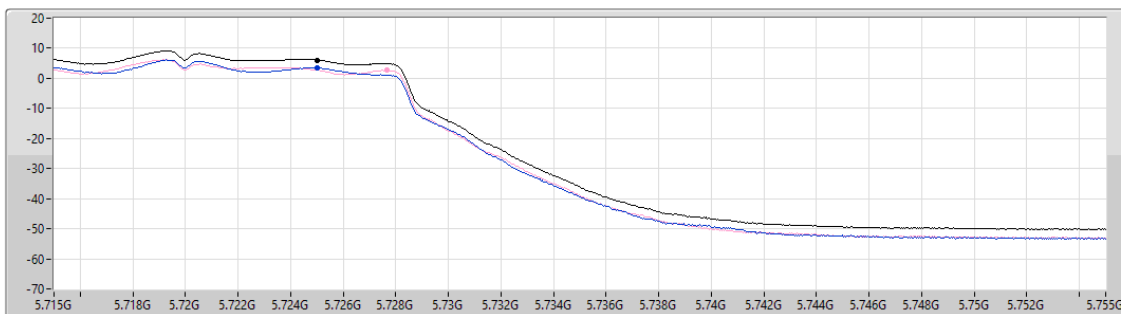

Sum ☒

Port 1 ☒

Port 2 ☒


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.08	6.08	3.47	2.68

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

09/01/2026

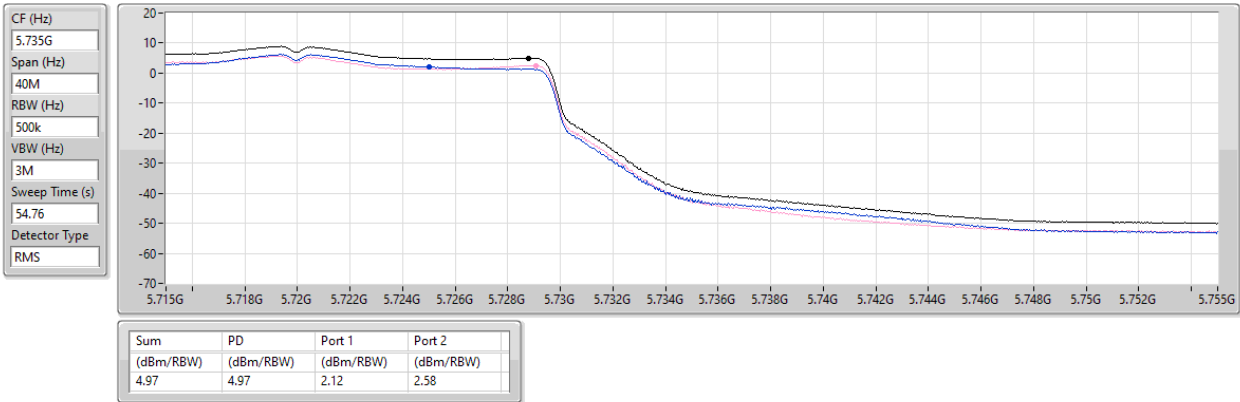



5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

08/01/2026

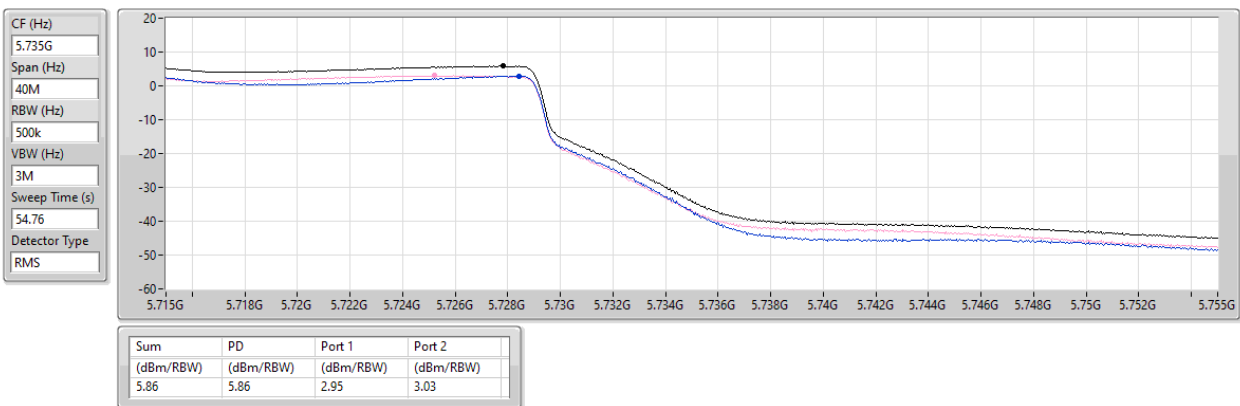

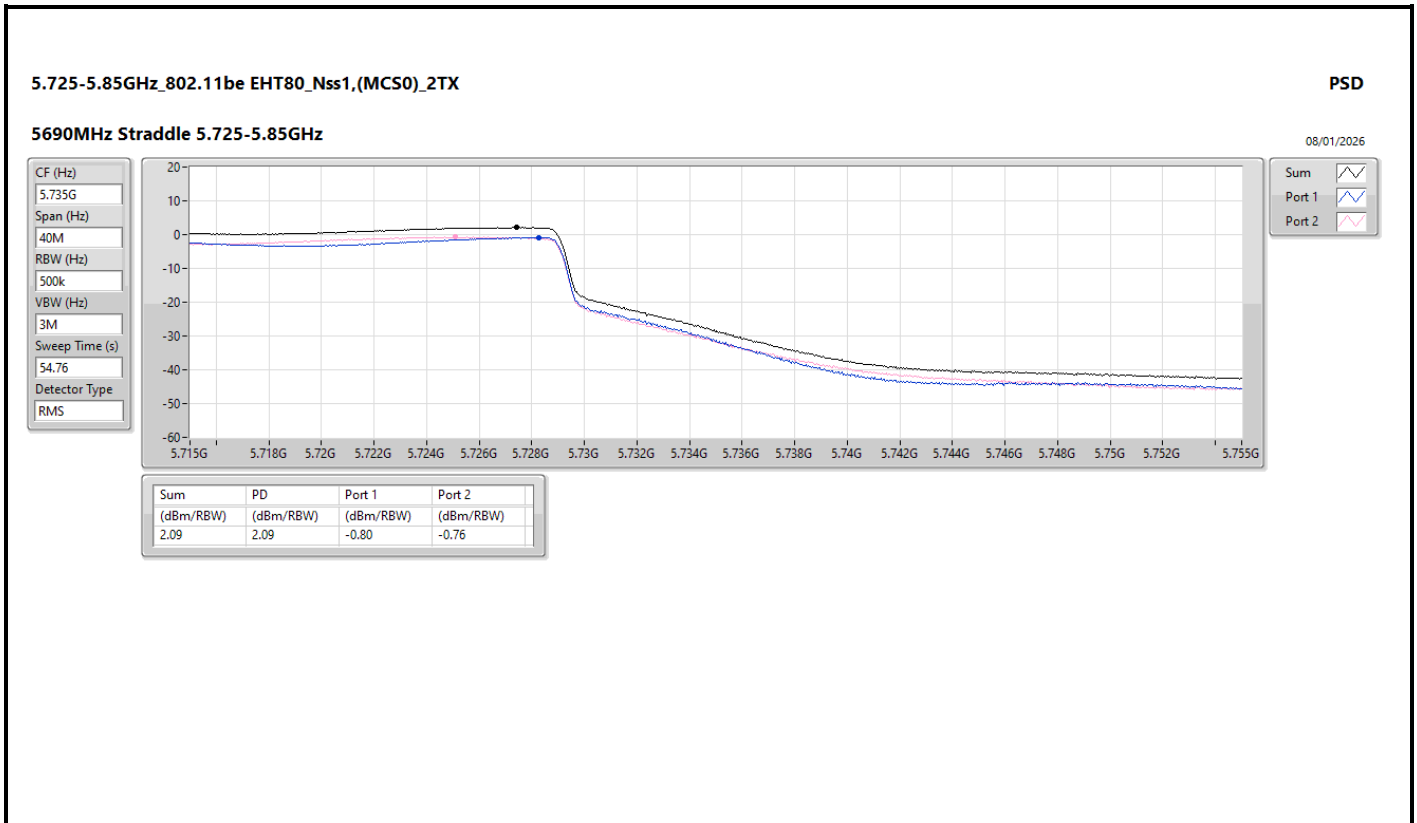



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	1.53
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	1.28
5.25-5.35GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	4.66
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-0.13
5.47-5.725GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	6.89
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	1.34
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	2.94

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-
5210MHz	Pass	6.51	-1.37	-1.28	1.53	16.49
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-
5290MHz	Pass	6.51	1.81	2.18	4.66	10.49
5530MHz	Pass	6.51	1.37	1.76	4.38	10.49
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-
5610MHz	Pass	6.51	3.72	4.05	6.89	10.49
5690MHz Straddle 5.47-5.725GHz	Pass	6.51	1.39	0.87	4.06	10.49
5690MHz Straddle 5.725-5.85GHz	Pass	6.51	-0.66	-1.88	1.75	29.49
5775MHz	Pass	6.51	0.33	0.21	2.94	29.49
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.51	-1.43	-1.56	1.28	16.49
5250MHz Straddle 5.25-5.35GHz	Pass	6.51	-3.79	-1.99	-0.13	10.49
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-
5570MHz	Pass	6.51	-1.65	-1.04	1.34	10.49

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

PSD

5210MHz

16/01/2026

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
28.248
Detector Type
RMS

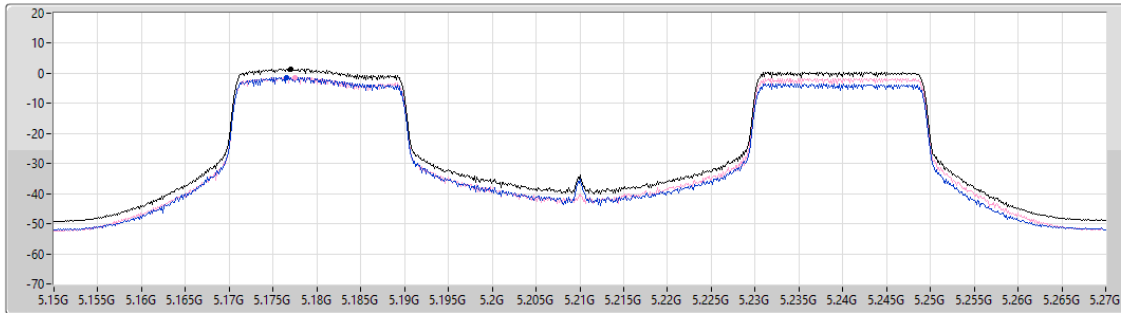

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.53	1.53	-1.37	-1.28


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

26/02/2026

CF (Hz)
5.17G
Span (Hz)
320M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
18.691
Detector Type
RMS

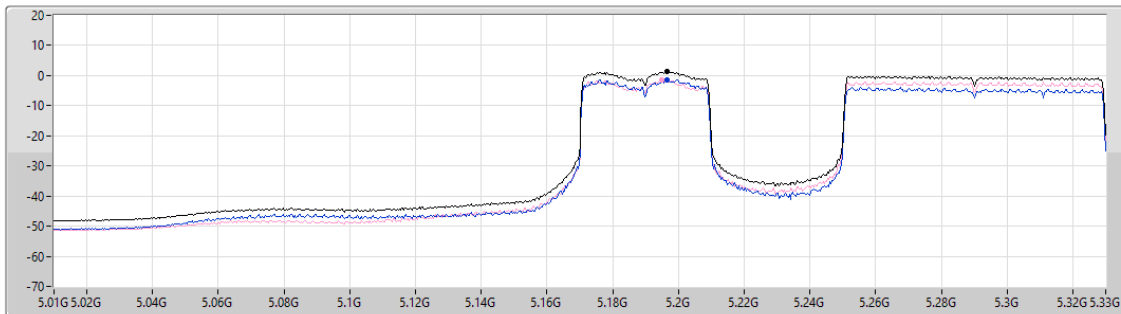

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.28	1.28	-1.43	-1.56

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5290MHz

26/02/2026

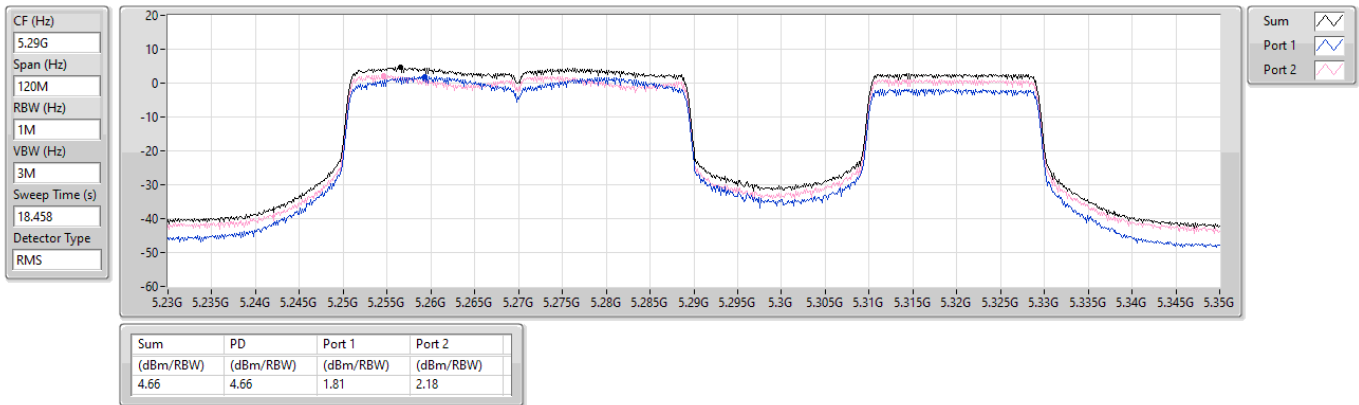


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

26/02/2026

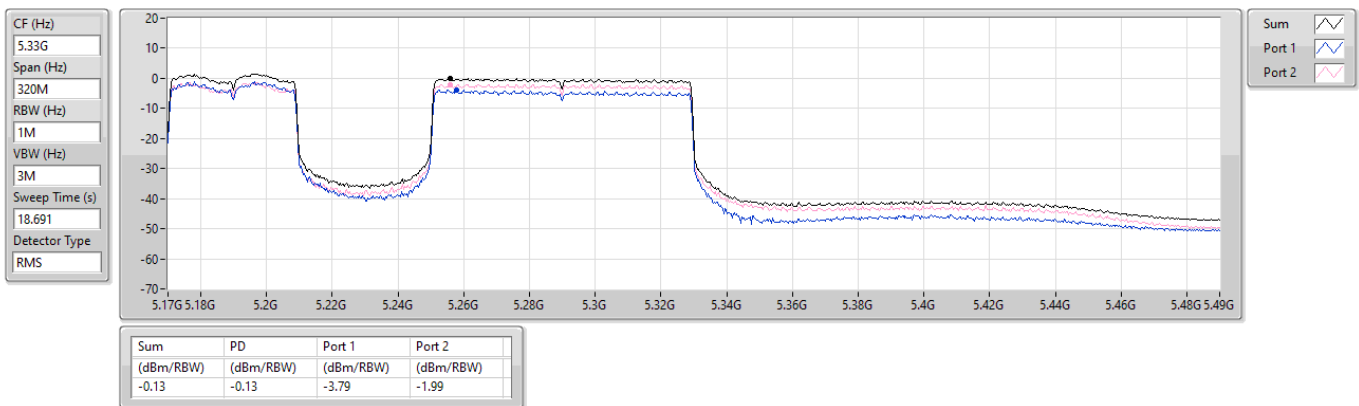


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

PSD

5610MHz

16/01/2026

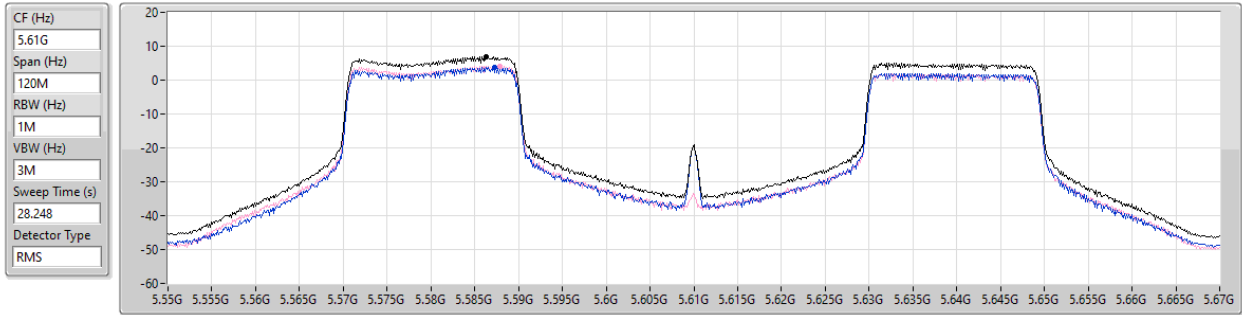


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.89	6.89	3.72	4.05

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX


PSD

5570MHz

26/02/2026

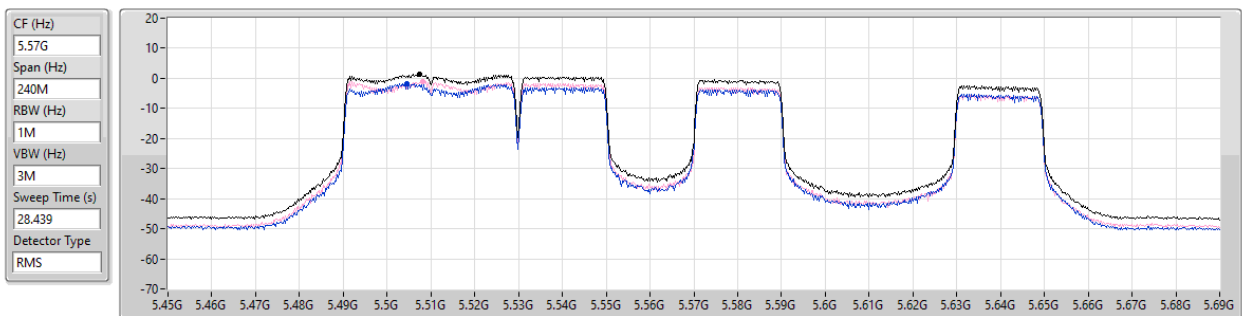

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.34	1.34	-1.65	-1.04

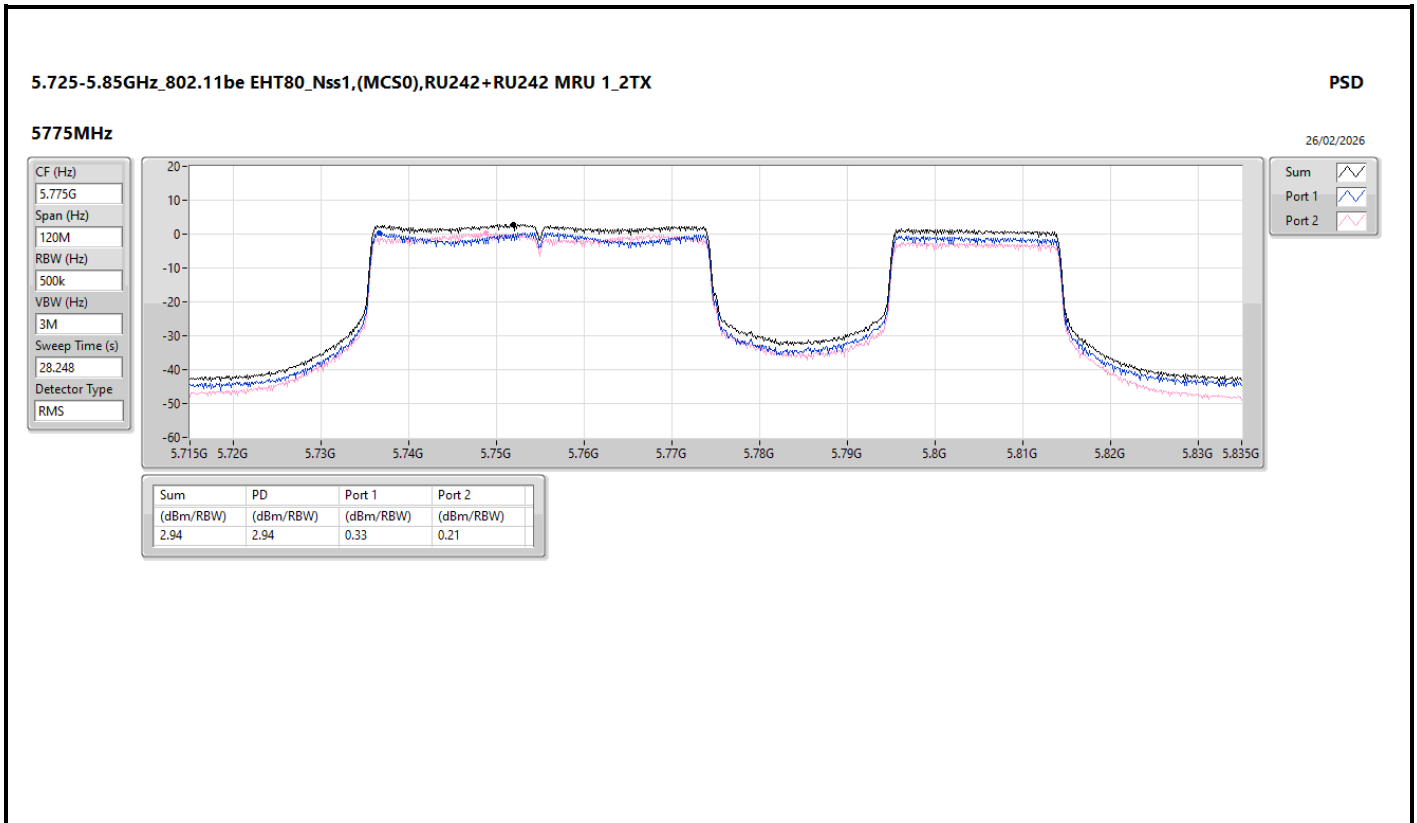



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	1.33
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX	0.55
5.25-5.35GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	3.30
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX	-1.27
5.47-5.725GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	6.74
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-9.51
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	4.98

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-	-	-	-
5210MHz	Pass	6.51	-1.80	-1.10	1.33	16.49
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-
5290MHz	Pass	6.51	-0.25	1.43	3.30	10.49
5530MHz	Pass	6.51	-7.72	-6.41	-4.03	10.49
5610MHz	Pass	6.51	3.78	3.81	6.74	10.49
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.51	3.55	2.66	6.11	10.49
5690MHz Straddle 5.725-5.85GHz	Pass	6.51	-1.07	-1.17	1.69	29.49
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-
5775MHz	Pass	6.51	2.90	0.79	4.98	29.49
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.51	-1.96	-2.43	0.55	16.49
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.51	-2.66	-2.98	-0.06	16.49
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.51	-3.82	-3.53	-1.27	10.49
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.51	-4.68	-4.63	-2.31	10.49
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-	-	-	-	-	-
5570MHz	Pass	6.51	-15.79	-14.94	-12.34	10.49
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-	-	-	-	-	-
5570MHz	Pass	6.51	-12.53	-12.15	-9.51	10.49


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

PSD

5210MHz

16/01/2026

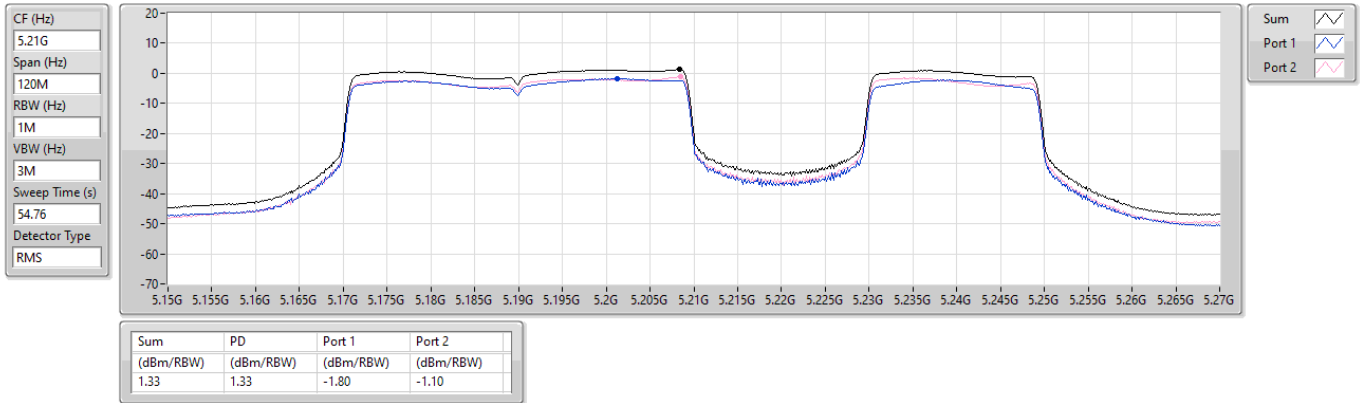


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

26/02/2026

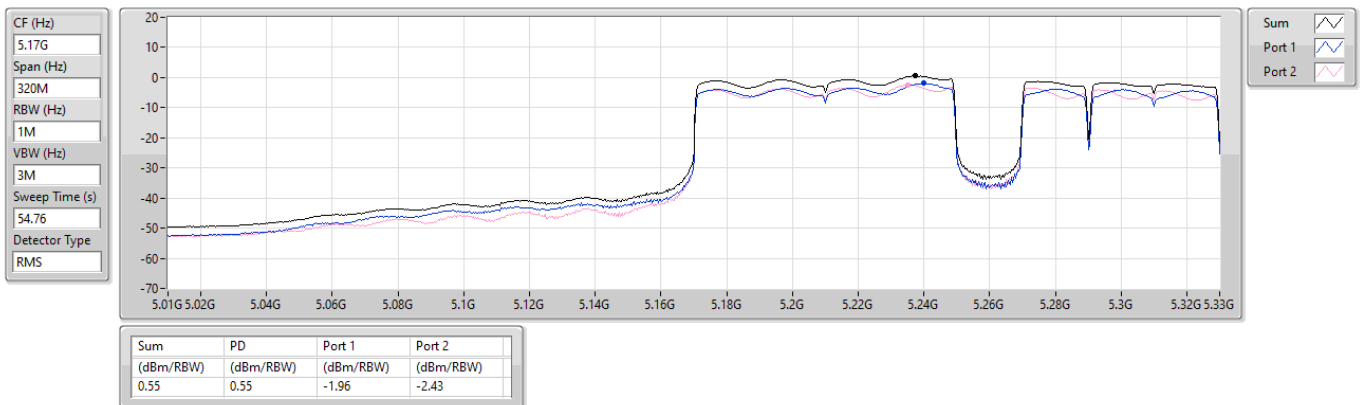


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

PSD

5290MHz

26/02/2026

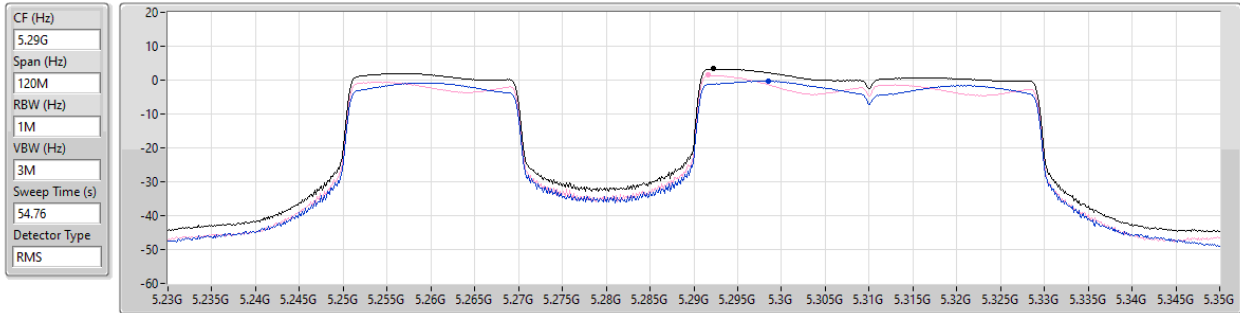


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.30	3.30	-0.25	1.43

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

26/02/2026

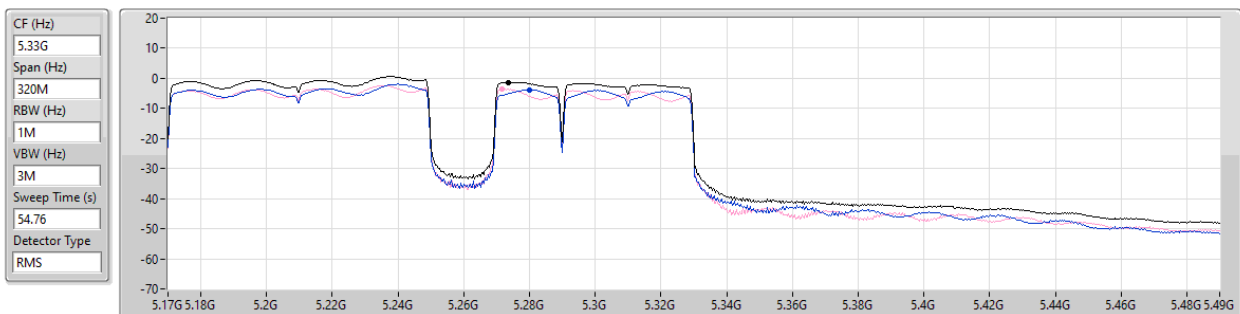

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.27	-1.27	-3.82	-3.53


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

PSD

5610MHz

16/01/2026

CF (Hz)
5.61G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

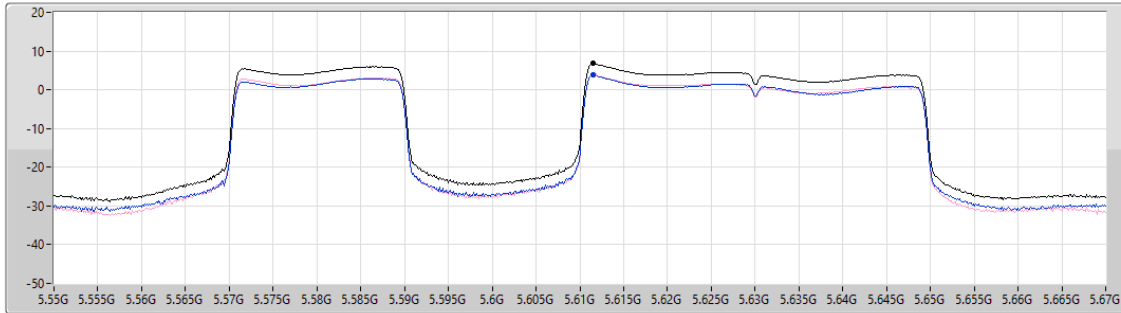

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.74	6.74	3.78	3.81


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX

PSD

5570MHz

26/02/2026

CF (Hz)
5.57G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

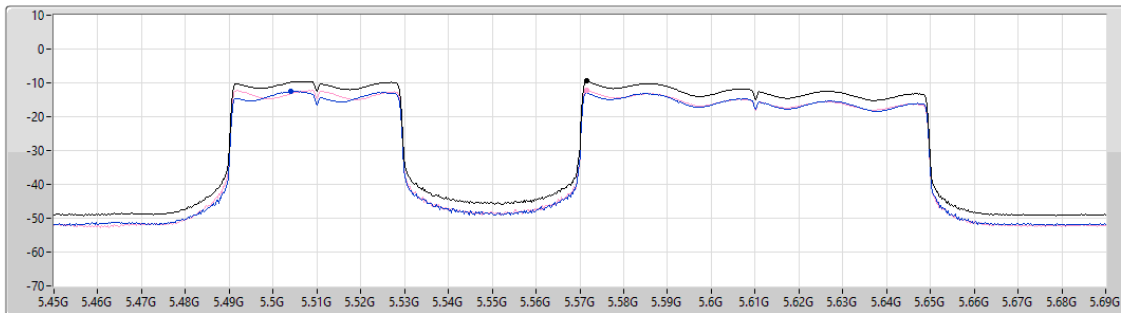

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.51	-9.51	-12.53	-12.15

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

PSD

5775MHz

26/02/2026

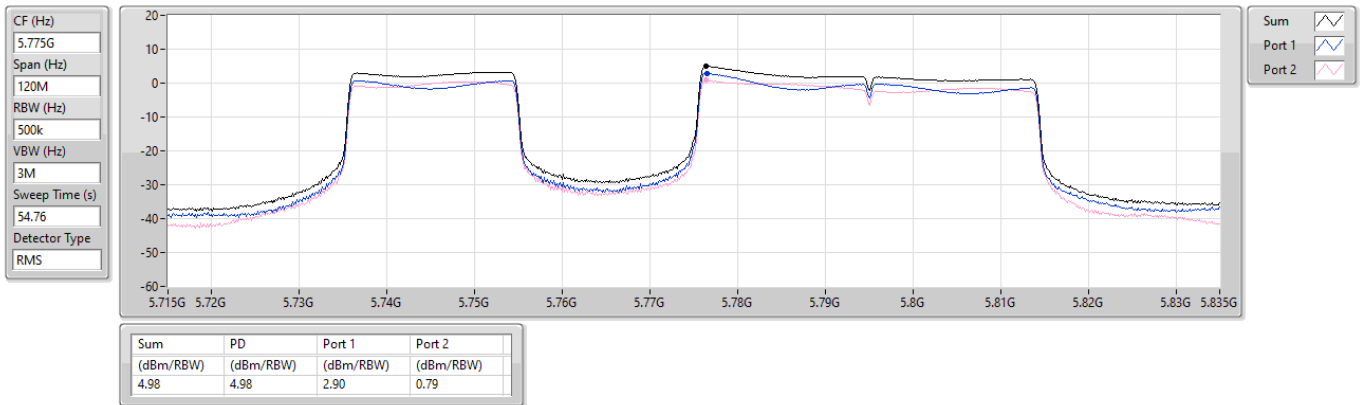

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	5.15G	53.55	54.00	-0.45	3	Vertical	356	1.43
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	5.3504G	53.68	54.00	-0.32	3	Vertical	355	1.50
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	5.35G	52.79	54.00	-1.21	3	Vertical	356	1.50
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	5.3508G	53.86	54.00	-0.14	3	Vertical	357	1.49
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.35G	52.87	54.00	-1.13	3	Vertical	360	1.50
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	PK	5.7252G	67.21	68.20	-0.99	3	Vertical	9	1.45
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	PK	5.7252G	67.98	68.20	-0.22	3	Vertical	7	1.48
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	PK	5.4672G	68.01	68.20	-0.19	3	Vertical	4	1.50
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.46G	53.84	54.00	-0.16	3	Vertical	3	1.69
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	PK	5.4644G	67.94	68.20	-0.26	3	Vertical	346	1.50

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	AV	5.1484G	48.80	54.00	-5.20	3	Vertical	355	1.36
5260MHz	Pass	AV	5.2606G	115.45	Inf	-Inf	3	Vertical	355	1.36
5260MHz	Pass	AV	5.3578G	49.51	54.00	-4.49	3	Vertical	355	1.36
5260MHz	Pass	PK	5.1472G	61.19	74.00	-12.81	3	Vertical	355	1.36
5260MHz	Pass	PK	5.2606G	123.63	Inf	-Inf	3	Vertical	355	1.36
5260MHz	Pass	PK	5.356G	62.40	74.00	-11.60	3	Vertical	355	1.36
5260MHz	Pass	AV	5.1388G	48.13	54.00	-5.87	3	Horizontal	28	1.50
5260MHz	Pass	AV	5.2612G	100.28	Inf	-Inf	3	Horizontal	28	1.50
5260MHz	Pass	AV	5.3992G	48.72	54.00	-5.28	3	Horizontal	28	1.50
5260MHz	Pass	PK	5.1316G	60.50	74.00	-13.50	3	Horizontal	28	1.50
5260MHz	Pass	PK	5.2612G	108.29	Inf	-Inf	3	Horizontal	28	1.50
5260MHz	Pass	PK	5.3944G	61.42	74.00	-12.58	3	Horizontal	28	1.50
5260MHz	Pass	PK	10.51452G	59.73	68.20	-8.47	3	Vertical	344	2.13
5260MHz	Pass	PK	10.52076G	59.22	68.20	-8.98	3	Horizontal	292	1.54
5300MHz	Pass	AV	5.3008G	113.79	Inf	-Inf	3	Vertical	355	1.50
5300MHz	Pass	AV	5.35G	49.54	54.00	-4.46	3	Vertical	355	1.50
5300MHz	Pass	PK	5.3008G	121.76	Inf	-Inf	3	Vertical	355	1.50
5300MHz	Pass	PK	5.3764G	61.84	74.00	-12.16	3	Vertical	355	1.50
5300MHz	Pass	AV	5.3008G	98.99	Inf	-Inf	3	Horizontal	29	1.54
5300MHz	Pass	AV	5.3824G	48.32	54.00	-5.68	3	Horizontal	29	1.54
5300MHz	Pass	PK	5.3012G	107.73	Inf	-Inf	3	Horizontal	29	1.54
5300MHz	Pass	PK	5.3848G	60.67	74.00	-13.33	3	Horizontal	29	1.54
5300MHz	Pass	AV	10.60124G	46.73	54.00	-7.27	3	Vertical	308	1.75
5300MHz	Pass	PK	10.60068G	60.02	74.00	-13.98	3	Vertical	308	1.75
5300MHz	Pass	AV	10.6004G	45.73	54.00	-8.27	3	Horizontal	268	1.49
5300MHz	Pass	PK	10.60112G	59.38	74.00	-14.62	3	Horizontal	268	1.49
5320MHz	Pass	AV	5.3206G	112.17	Inf	-Inf	3	Vertical	355	1.50
5320MHz	Pass	AV	5.3504G	53.68	54.00	-0.32	3	Vertical	355	1.50
5320MHz	Pass	PK	5.3208G	120.33	Inf	-Inf	3	Vertical	355	1.50
5320MHz	Pass	PK	5.351G	68.23	74.00	-5.77	3	Vertical	355	1.50
5320MHz	Pass	AV	5.321G	97.77	Inf	-Inf	3	Horizontal	46	1.76
5320MHz	Pass	AV	5.3516G	48.02	54.00	-5.98	3	Horizontal	46	1.76
5320MHz	Pass	PK	5.322G	105.92	Inf	-Inf	3	Horizontal	46	1.76
5320MHz	Pass	PK	5.368G	60.95	74.00	-13.05	3	Horizontal	46	1.76
5320MHz	Pass	AV	10.641G	44.96	54.00	-9.04	3	Vertical	308	1.75
5320MHz	Pass	PK	10.64104G	58.12	74.00	-15.88	3	Vertical	308	1.75
5320MHz	Pass	AV	10.64036G	44.36	54.00	-9.64	3	Horizontal	270	1.50
5320MHz	Pass	PK	10.64064G	57.25	74.00	-16.75	3	Horizontal	270	1.50
5500MHz	Pass	AV	5.4588G	50.47	54.00	-3.53	3	Vertical	6	1.39
5500MHz	Pass	AV	5.4992G	114.35	Inf	-Inf	3	Vertical	6	1.39
5500MHz	Pass	PK	5.458G	62.30	74.00	-11.70	3	Vertical	6	1.39
5500MHz	Pass	PK	5.4694G	66.03	68.20	-2.17	3	Vertical	6	1.39
5500MHz	Pass	PK	5.4992G	122.64	Inf	-Inf	3	Vertical	6	1.39
5500MHz	Pass	AV	5.4546G	48.47	54.00	-5.53	3	Horizontal	46	2.21
5500MHz	Pass	AV	5.5006G	102.62	Inf	-Inf	3	Horizontal	46	2.21
5500MHz	Pass	PK	5.4516G	60.69	74.00	-13.31	3	Horizontal	46	2.21
5500MHz	Pass	PK	5.468G	61.56	68.20	-6.64	3	Horizontal	46	2.21
5500MHz	Pass	PK	5.5008G	110.64	Inf	-Inf	3	Horizontal	46	2.21
5500MHz	Pass	AV	11.0018G	46.74	54.00	-7.26	3	Vertical	43	1.59
5500MHz	Pass	PK	11.00156G	59.60	74.00	-14.40	3	Vertical	43	1.59
5500MHz	Pass	AV	11.0002G	43.94	54.00	-10.06	3	Horizontal	53	1.50
5500MHz	Pass	PK	10.9946G	56.30	74.00	-17.70	3	Horizontal	53	1.50
5580MHz	Pass	AV	5.4528G	49.05	54.00	-4.95	3	Vertical	344	1.50
5580MHz	Pass	AV	5.5794G	113.74	Inf	-Inf	3	Vertical	344	1.50
5580MHz	Pass	PK	5.4546G	61.30	74.00	-12.70	3	Vertical	344	1.50
5580MHz	Pass	PK	5.4624G	61.15	68.20	-7.05	3	Vertical	344	1.50
5580MHz	Pass	PK	5.5794G	121.90	Inf	-Inf	3	Vertical	344	1.50
5580MHz	Pass	PK	5.7276G	61.09	68.20	-7.11	3	Vertical	344	1.50
5580MHz	Pass	AV	5.457G	48.32	54.00	-5.68	3	Horizontal	49	1.70
5580MHz	Pass	AV	5.5782G	101.95	Inf	-Inf	3	Horizontal	49	1.70

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5580MHz	Pass	PK	5.4318G	60.06	74.00	-13.94	3	Horizontal	49	1.70
5580MHz	Pass	PK	5.4648G	60.01	68.20	-8.19	3	Horizontal	49	1.70
5580MHz	Pass	PK	5.5782G	110.66	Inf	-Inf	3	Horizontal	49	1.70
5580MHz	Pass	PK	5.727G	60.85	68.20	-7.35	3	Horizontal	49	1.70
5580MHz	Pass	AV	11.1602G	47.60	54.00	-6.40	3	Vertical	41	1.43
5580MHz	Pass	PK	11.16068G	60.44	74.00	-13.56	3	Vertical	41	1.43
5580MHz	Pass	AV	11.16012G	45.97	54.00	-8.03	3	Horizontal	289	1.50
5580MHz	Pass	PK	11.16056G	58.70	74.00	-15.30	3	Horizontal	289	1.50
5700MHz	Pass	AV	5.6992G	114.89	Inf	-Inf	3	Vertical	9	1.45
5700MHz	Pass	PK	5.6992G	123.00	Inf	-Inf	3	Vertical	9	1.45
5700MHz	Pass	PK	5.7252G	67.21	68.20	-0.99	3	Vertical	9	1.45
5700MHz	Pass	AV	5.6992G	105.45	Inf	-Inf	3	Horizontal	53	1.78
5700MHz	Pass	PK	5.6988G	113.56	Inf	-Inf	3	Horizontal	53	1.78
5700MHz	Pass	PK	5.726G	62.06	68.20	-6.14	3	Horizontal	53	1.78
5700MHz	Pass	AV	11.40076G	44.17	54.00	-9.83	3	Vertical	339	1.50
5700MHz	Pass	PK	11.39568G	56.88	74.00	-17.12	3	Vertical	339	1.50
5700MHz	Pass	AV	11.39996G	44.66	54.00	-9.34	3	Horizontal	279	1.61
5700MHz	Pass	PK	11.39968G	57.29	74.00	-16.71	3	Horizontal	279	1.61
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4296G	51.64	54.00	-2.36	3	Vertical	9	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7188G	114.39	Inf	-Inf	3	Vertical	9	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4344G	62.94	74.00	-11.06	3	Vertical	9	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4668G	60.15	68.20	-8.05	3	Vertical	9	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7188G	122.44	Inf	-Inf	3	Vertical	9	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.9024G	62.93	68.20	-5.27	3	Vertical	9	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4296G	48.44	54.00	-5.56	3	Horizontal	52	1.76
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7188G	104.95	Inf	-Inf	3	Horizontal	52	1.76
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4476G	62.06	74.00	-11.94	3	Horizontal	52	1.76
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4644G	59.80	68.20	-8.40	3	Horizontal	52	1.76
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7188G	113.10	Inf	-Inf	3	Horizontal	52	1.76
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.8748G	62.94	68.20	-5.26	3	Horizontal	52	1.76
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44104G	44.49	54.00	-9.51	3	Vertical	39	1.34
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44076G	57.21	74.00	-16.79	3	Vertical	39	1.34
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44G	44.08	54.00	-9.92	3	Horizontal	284	1.63
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44016G	56.85	74.00	-17.15	3	Horizontal	284	1.63
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	AV	5.14G	48.61	54.00	-5.39	3	Vertical	357	1.50
5260MHz	Pass	AV	5.2606G	114.23	Inf	-Inf	3	Vertical	357	1.50
5260MHz	Pass	AV	5.3572G	49.43	54.00	-4.57	3	Vertical	357	1.50
5260MHz	Pass	PK	5.1394G	61.14	74.00	-12.86	3	Vertical	357	1.50
5260MHz	Pass	PK	5.2594G	124.21	Inf	-Inf	3	Vertical	357	1.50
5260MHz	Pass	PK	5.3836G	62.01	74.00	-11.99	3	Vertical	357	1.50
5260MHz	Pass	AV	5.1436G	48.08	54.00	-5.92	3	Horizontal	28	1.50
5260MHz	Pass	AV	5.2612G	98.09	Inf	-Inf	3	Horizontal	28	1.50
5260MHz	Pass	AV	5.4082G	48.73	54.00	-5.27	3	Horizontal	28	1.50
5260MHz	Pass	PK	5.1454G	60.10	74.00	-13.90	3	Horizontal	28	1.50
5260MHz	Pass	PK	5.2618G	108.71	Inf	-Inf	3	Horizontal	28	1.50
5260MHz	Pass	PK	5.3572G	60.85	74.00	-13.15	3	Horizontal	28	1.50
5260MHz	Pass	PK	10.51948G	59.51	68.20	-8.69	3	Vertical	332	2.42
5260MHz	Pass	PK	10.52256G	58.55	68.20	-9.65	3	Horizontal	292	1.60
5300MHz	Pass	AV	5.2992G	112.93	Inf	-Inf	3	Vertical	360	1.50
5300MHz	Pass	AV	5.35G	51.12	54.00	-2.88	3	Vertical	360	1.50
5300MHz	Pass	PK	5.2996G	124.05	Inf	-Inf	3	Vertical	360	1.50
5300MHz	Pass	PK	5.3516G	63.42	74.00	-10.58	3	Vertical	360	1.50
5300MHz	Pass	AV	5.3008G	99.18	Inf	-Inf	3	Horizontal	87	1.26
5300MHz	Pass	AV	5.3912G	48.33	54.00	-5.67	3	Horizontal	87	1.26
5300MHz	Pass	PK	5.2996G	110.47	Inf	-Inf	3	Horizontal	87	1.26
5300MHz	Pass	PK	5.3752G	60.45	74.00	-13.55	3	Horizontal	87	1.26
5300MHz	Pass	AV	10.60372G	46.40	54.00	-7.60	3	Vertical	308	1.74
5300MHz	Pass	PK	10.6048G	60.33	74.00	-13.67	3	Vertical	308	1.74
5300MHz	Pass	AV	10.603G	45.19	54.00	-8.81	3	Horizontal	267	1.50
5300MHz	Pass	PK	10.60152G	58.69	74.00	-15.31	3	Horizontal	267	1.50
5320MHz	Pass	AV	5.3208G	110.88	Inf	-Inf	3	Vertical	356	1.50

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5320MHz	Pass	AV	5.35G	52.79	54.00	-1.21	3	Vertical	356	1.50
5320MHz	Pass	PK	5.3208G	121.73	Inf	-Inf	3	Vertical	356	1.50
5320MHz	Pass	PK	5.3502G	65.20	74.00	-8.80	3	Vertical	356	1.50
5320MHz	Pass	AV	5.3206G	96.29	Inf	-Inf	3	Horizontal	86	1.50
5320MHz	Pass	AV	5.3564G	47.97	54.00	-6.03	3	Horizontal	86	1.50
5320MHz	Pass	PK	5.3184G	107.55	Inf	-Inf	3	Horizontal	86	1.50
5320MHz	Pass	PK	5.3598G	60.10	74.00	-13.90	3	Horizontal	86	1.50
5320MHz	Pass	AV	10.64292G	44.24	54.00	-9.76	3	Vertical	311	1.70
5320MHz	Pass	PK	10.64724G	57.32	74.00	-16.68	3	Vertical	311	1.70
5320MHz	Pass	AV	10.64116G	43.64	54.00	-10.36	3	Horizontal	270	1.50
5320MHz	Pass	PK	10.64328G	56.22	74.00	-17.78	3	Horizontal	270	1.50
5500MHz	Pass	AV	5.4568G	50.75	54.00	-3.25	3	Vertical	341	1.50
5500MHz	Pass	AV	5.4992G	112.92	Inf	-Inf	3	Vertical	341	1.50
5500MHz	Pass	PK	5.4524G	63.07	74.00	-10.93	3	Vertical	341	1.50
5500MHz	Pass	PK	5.47G	65.63	68.20	-2.57	3	Vertical	341	1.50
5500MHz	Pass	PK	5.4996G	123.90	Inf	-Inf	3	Vertical	341	1.50
5500MHz	Pass	AV	5.4558G	48.47	54.00	-5.53	3	Horizontal	325	2.34
5500MHz	Pass	AV	5.4994G	100.35	Inf	-Inf	3	Horizontal	325	2.34
5500MHz	Pass	PK	5.4574G	60.67	74.00	-13.33	3	Horizontal	325	2.34
5500MHz	Pass	PK	5.4638G	60.54	68.20	-7.66	3	Horizontal	325	2.34
5500MHz	Pass	PK	5.4994G	112.38	Inf	-Inf	3	Horizontal	325	2.34
5500MHz	Pass	AV	11.00576G	45.92	54.00	-8.08	3	Vertical	43	1.53
5500MHz	Pass	PK	11.00584G	59.29	74.00	-14.71	3	Vertical	43	1.53
5500MHz	Pass	AV	10.99952G	43.46	54.00	-10.54	3	Horizontal	51	1.50
5500MHz	Pass	PK	11.00032G	56.12	74.00	-17.88	3	Horizontal	51	1.50
5580MHz	Pass	AV	5.4588G	49.07	54.00	-4.93	3	Vertical	340	1.71
5580MHz	Pass	AV	5.5794G	113.28	Inf	-Inf	3	Vertical	340	1.71
5580MHz	Pass	PK	5.4402G	60.91	74.00	-13.09	3	Vertical	340	1.71
5580MHz	Pass	PK	5.4672G	60.45	68.20	-7.75	3	Vertical	340	1.71
5580MHz	Pass	PK	5.5794G	124.23	Inf	-Inf	3	Vertical	340	1.71
5580MHz	Pass	PK	5.7264G	61.17	68.20	-7.03	3	Vertical	340	1.71
5580MHz	Pass	AV	5.4552G	48.32	54.00	-5.68	3	Horizontal	322	1.50
5580MHz	Pass	AV	5.5806G	101.02	Inf	-Inf	3	Horizontal	322	1.50
5580MHz	Pass	PK	5.4528G	61.06	74.00	-12.94	3	Horizontal	322	1.50
5580MHz	Pass	PK	5.463G	59.92	68.20	-8.28	3	Horizontal	322	1.50
5580MHz	Pass	PK	5.5806G	112.27	Inf	-Inf	3	Horizontal	322	1.50
5580MHz	Pass	PK	5.7288G	60.81	68.20	-7.39	3	Horizontal	322	1.50
5580MHz	Pass	AV	11.16188G	47.14	54.00	-6.86	3	Vertical	43	1.48
5580MHz	Pass	PK	11.16188G	60.39	74.00	-13.61	3	Vertical	43	1.48
5580MHz	Pass	AV	11.16G	45.65	54.00	-8.35	3	Horizontal	291	1.50
5580MHz	Pass	PK	11.1612G	58.39	74.00	-15.61	3	Horizontal	291	1.50
5700MHz	Pass	AV	5.6992G	111.86	Inf	-Inf	3	Vertical	7	1.48
5700MHz	Pass	PK	5.6992G	123.22	Inf	-Inf	3	Vertical	7	1.48
5700MHz	Pass	PK	5.7252G	67.98	68.20	-0.22	3	Vertical	7	1.48
5700MHz	Pass	AV	5.6992G	101.28	Inf	-Inf	3	Horizontal	325	1.50
5700MHz	Pass	PK	5.6996G	112.38	Inf	-Inf	3	Horizontal	325	1.50
5700MHz	Pass	PK	5.726G	62.85	68.20	-5.35	3	Horizontal	325	1.50
5700MHz	Pass	AV	11.40004G	43.03	54.00	-10.97	3	Vertical	37	1.50
5700MHz	Pass	PK	11.4034G	56.45	74.00	-17.55	3	Vertical	37	1.50
5700MHz	Pass	AV	11.39968G	43.18	54.00	-10.82	3	Horizontal	276	1.77
5700MHz	Pass	PK	11.40304G	56.10	74.00	-17.90	3	Horizontal	276	1.77
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4308G	50.89	54.00	-3.11	3	Vertical	7	1.46
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7188G	113.73	Inf	-Inf	3	Vertical	7	1.46
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4308G	62.27	74.00	-11.73	3	Vertical	7	1.46
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4644G	60.46	68.20	-7.74	3	Vertical	7	1.46
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7176G	123.72	Inf	-Inf	3	Vertical	7	1.46
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.9588G	62.28	68.20	-5.92	3	Vertical	7	1.46
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4332G	48.36	54.00	-5.64	3	Horizontal	323	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7188G	103.22	Inf	-Inf	3	Horizontal	323	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4392G	59.87	74.00	-14.13	3	Horizontal	323	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4692G	60.59	68.20	-7.61	3	Horizontal	323	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.72G	113.32	Inf	-Inf	3	Horizontal	323	1.50

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.9852G	62.85	68.20	-5.35	3	Horizontal	323	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44188G	44.46	54.00	-9.54	3	Vertical	41	1.44
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44088G	57.24	74.00	-16.76	3	Vertical	41	1.44
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44004G	43.67	54.00	-10.33	3	Horizontal	308	1.23
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44088G	56.33	74.00	-17.67	3	Horizontal	308	1.23
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	AV	5.2708G	111.56	Inf	-Inf	3	Vertical	357	1.49
5270MHz	Pass	AV	5.3508G	53.86	54.00	-0.14	3	Vertical	357	1.49
5270MHz	Pass	PK	5.2708G	123.60	Inf	-Inf	3	Vertical	357	1.49
5270MHz	Pass	PK	5.3504G	67.89	74.00	-6.11	3	Vertical	357	1.49
5270MHz	Pass	AV	5.2708G	97.47	Inf	-Inf	3	Horizontal	83	1.17
5270MHz	Pass	AV	5.3512G	48.45	54.00	-5.55	3	Horizontal	83	1.17
5270MHz	Pass	PK	5.2708G	108.38	Inf	-Inf	3	Horizontal	83	1.17
5270MHz	Pass	PK	5.3508G	60.56	74.00	-13.44	3	Horizontal	83	1.17
5270MHz	Pass	PK	10.53872G	58.19	68.20	-10.01	3	Vertical	42	2.95
5270MHz	Pass	PK	10.54272G	56.68	68.20	-11.52	3	Horizontal	262	1.50
5310MHz	Pass	AV	5.3088G	104.47	Inf	-Inf	3	Vertical	0	1.50
5310MHz	Pass	AV	5.35G	53.68	54.00	-0.32	3	Vertical	0	1.50
5310MHz	Pass	PK	5.3088G	115.62	Inf	-Inf	3	Vertical	0	1.50
5310MHz	Pass	PK	5.3508G	66.88	74.00	-7.12	3	Vertical	0	1.50
5310MHz	Pass	AV	5.3092G	90.23	Inf	-Inf	3	Horizontal	89	1.49
5310MHz	Pass	AV	5.4076G	48.46	54.00	-5.54	3	Horizontal	89	1.49
5310MHz	Pass	PK	5.3108G	100.85	Inf	-Inf	3	Horizontal	89	1.49
5310MHz	Pass	PK	5.3696G	60.60	74.00	-13.40	3	Horizontal	89	1.49
5310MHz	Pass	AV	10.61728G	41.02	54.00	-12.98	3	Vertical	305	2.52
5310MHz	Pass	PK	10.62704G	54.09	74.00	-19.91	3	Vertical	305	2.52
5310MHz	Pass	AV	10.61984G	41.35	54.00	-12.65	3	Horizontal	333	2.15
5310MHz	Pass	PK	10.60152G	53.84	74.00	-20.16	3	Horizontal	333	2.15
5510MHz	Pass	AV	5.46G	51.38	54.00	-2.62	3	Vertical	4	1.50
5510MHz	Pass	AV	5.5088G	107.43	Inf	-Inf	3	Vertical	4	1.50
5510MHz	Pass	PK	5.46G	63.43	74.00	-10.57	3	Vertical	4	1.50
5510MHz	Pass	PK	5.4672G	68.01	68.20	-0.19	3	Vertical	4	1.50
5510MHz	Pass	PK	5.5084G	119.38	Inf	-Inf	3	Vertical	4	1.50
5510MHz	Pass	AV	5.46G	48.65	54.00	-5.35	3	Horizontal	309	2.27
5510MHz	Pass	AV	5.5068G	94.75	Inf	-Inf	3	Horizontal	309	2.27
5510MHz	Pass	PK	5.4596G	61.07	74.00	-12.93	3	Horizontal	309	2.27
5510MHz	Pass	PK	5.4648G	61.39	68.20	-6.81	3	Horizontal	309	2.27
5510MHz	Pass	PK	5.5068G	106.12	Inf	-Inf	3	Horizontal	309	2.27
5510MHz	Pass	AV	11.02456G	42.69	54.00	-11.31	3	Vertical	40	1.50
5510MHz	Pass	PK	11.024G	55.81	74.00	-18.19	3	Vertical	40	1.50
5510MHz	Pass	AV	11.02504G	41.43	54.00	-12.57	3	Horizontal	1	1.55
5510MHz	Pass	PK	11.0216G	54.07	74.00	-19.93	3	Horizontal	1	1.55
5550MHz	Pass	AV	5.46G	49.82	54.00	-4.18	3	Vertical	5	1.50
5550MHz	Pass	AV	5.5484G	110.66	Inf	-Inf	3	Vertical	5	1.50
5550MHz	Pass	PK	5.46G	61.63	74.00	-12.37	3	Vertical	5	1.50
5550MHz	Pass	PK	5.47G	64.54	68.20	-3.66	3	Vertical	5	1.50
5550MHz	Pass	PK	5.546G	122.10	Inf	-Inf	3	Vertical	5	1.50
5550MHz	Pass	AV	5.4532G	48.38	54.00	-5.62	3	Horizontal	326	2.32
5550MHz	Pass	AV	5.5492G	98.48	Inf	-Inf	3	Horizontal	326	2.32
5550MHz	Pass	PK	5.4528G	60.70	74.00	-13.30	3	Horizontal	326	2.32
5550MHz	Pass	PK	5.4692G	60.57	68.20	-7.63	3	Horizontal	326	2.32
5550MHz	Pass	PK	5.5512G	109.97	Inf	-Inf	3	Horizontal	326	2.32
5550MHz	Pass	AV	11.10376G	46.62	54.00	-7.38	3	Vertical	42	1.50
5550MHz	Pass	PK	11.10512G	61.70	74.00	-12.30	3	Vertical	42	1.50
5550MHz	Pass	AV	11.10408G	44.30	54.00	-9.70	3	Horizontal	286	1.65
5550MHz	Pass	PK	11.1048G	56.66	74.00	-17.34	3	Horizontal	286	1.65
5670MHz	Pass	AV	5.6688G	108.59	Inf	-Inf	3	Vertical	5	1.50
5670MHz	Pass	PK	5.667G	119.68	Inf	-Inf	3	Vertical	5	1.50
5670MHz	Pass	PK	5.7252G	66.62	68.20	-1.58	3	Vertical	5	1.50
5670MHz	Pass	AV	5.6688G	99.86	Inf	-Inf	3	Horizontal	54	1.00
5670MHz	Pass	PK	5.6688G	111.13	Inf	-Inf	3	Horizontal	54	1.00
5670MHz	Pass	PK	5.781G	62.07	68.20	-6.13	3	Horizontal	54	1.00

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5670MHz	Pass	AV	11.34648G	42.30	54.00	-11.70	3	Vertical	297	1.42
5670MHz	Pass	PK	11.34592G	55.79	74.00	-18.21	3	Vertical	297	1.42
5670MHz	Pass	AV	11.34416G	42.55	54.00	-11.45	3	Horizontal	46	1.70
5670MHz	Pass	PK	11.3264G	55.21	74.00	-18.79	3	Horizontal	46	1.70
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.4184G	50.39	54.00	-3.61	3	Vertical	8	1.23
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.7088G	111.68	Inf	-Inf	3	Vertical	8	1.23
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.422G	61.96	74.00	-12.04	3	Vertical	8	1.23
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.47G	61.69	68.20	-6.51	3	Vertical	8	1.23
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.7088G	122.08	Inf	-Inf	3	Vertical	8	1.23
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.9092G	62.48	68.20	-5.72	3	Vertical	8	1.23
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.46G	48.35	54.00	-5.65	3	Horizontal	324	1.50
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.7088G	100.84	Inf	-Inf	3	Horizontal	324	1.50
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.416G	60.70	74.00	-13.30	3	Horizontal	324	1.50
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.4652G	60.21	68.20	-7.99	3	Horizontal	324	1.50
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.7076G	110.94	Inf	-Inf	3	Horizontal	324	1.50
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.9344G	62.30	68.20	-5.90	3	Horizontal	324	1.50
5710MHz Straddle 5.47-5.725GHz	Pass	AV	11.42G	43.18	54.00	-10.82	3	Vertical	39	1.54
5710MHz Straddle 5.47-5.725GHz	Pass	PK	11.42232G	55.40	74.00	-18.60	3	Vertical	39	1.54
5710MHz Straddle 5.47-5.725GHz	Pass	AV	11.41968G	43.16	54.00	-10.84	3	Horizontal	279	1.68
5710MHz Straddle 5.47-5.725GHz	Pass	PK	11.42272G	56.80	74.00	-17.20	3	Horizontal	279	1.68
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	AV	5.142G	48.39	54.00	-5.61	3	Vertical	360	1.50
5290MHz	Pass	AV	5.289G	101.65	Inf	-Inf	3	Vertical	360	1.50
5290MHz	Pass	AV	5.35G	52.87	54.00	-1.13	3	Vertical	360	1.50
5290MHz	Pass	PK	5.046G	60.60	74.00	-13.40	3	Vertical	360	1.50
5290MHz	Pass	PK	5.289G	113.59	Inf	-Inf	3	Vertical	360	1.50
5290MHz	Pass	PK	5.35G	64.84	74.00	-9.16	3	Vertical	360	1.50
5290MHz	Pass	PK	5.536G	61.09	68.20	-7.11	3	Vertical	360	1.50
5290MHz	Pass	AV	5.045G	48.31	54.00	-5.69	3	Horizontal	49	1.52
5290MHz	Pass	AV	5.295G	87.23	Inf	-Inf	3	Horizontal	49	1.52
5290MHz	Pass	AV	5.459G	48.97	54.00	-5.03	3	Horizontal	49	1.52
5290MHz	Pass	PK	5.054G	60.14	74.00	-13.86	3	Horizontal	49	1.52
5290MHz	Pass	PK	5.294G	99.64	Inf	-Inf	3	Horizontal	49	1.52
5290MHz	Pass	PK	5.458G	61.83	74.00	-12.17	3	Horizontal	49	1.52
5290MHz	Pass	PK	5.495G	61.46	68.20	-6.74	3	Horizontal	49	1.52
5290MHz	Pass	AV	10.61872G	40.94	54.00	-13.06	3	Vertical	85	1.50
5290MHz	Pass	PK	10.58976G	54.31	68.20	-13.89	3	Vertical	85	1.50
5290MHz	Pass	AV	10.6176G	40.88	54.00	-13.12	3	Horizontal	254	2.03
5290MHz	Pass	PK	10.58624G	53.52	68.20	-14.68	3	Horizontal	254	2.03
5530MHz	Pass	AV	5.35G	49.08	54.00	-4.92	3	Vertical	3	1.69
5530MHz	Pass	AV	5.46G	53.84	54.00	-0.16	3	Vertical	3	1.69
5530MHz	Pass	AV	5.527G	103.81	Inf	-Inf	3	Vertical	3	1.69
5530MHz	Pass	PK	5.331G	61.02	68.20	-7.18	3	Vertical	3	1.69
5530MHz	Pass	PK	5.46G	65.04	74.00	-8.96	3	Vertical	3	1.69
5530MHz	Pass	PK	5.466G	66.89	68.20	-1.31	3	Vertical	3	1.69
5530MHz	Pass	PK	5.527G	115.63	Inf	-Inf	3	Vertical	3	1.69
5530MHz	Pass	PK	5.77G	62.30	68.20	-5.90	3	Vertical	3	1.69
5530MHz	Pass	AV	5.35G	47.81	54.00	-6.19	3	Horizontal	325	2.42
5530MHz	Pass	AV	5.459G	48.64	54.00	-5.36	3	Horizontal	325	2.42
5530MHz	Pass	AV	5.529G	91.21	Inf	-Inf	3	Horizontal	325	2.42
5530MHz	Pass	PK	5.336G	60.58	68.20	-7.62	3	Horizontal	325	2.42
5530MHz	Pass	PK	5.383G	60.58	74.00	-13.42	3	Horizontal	325	2.42
5530MHz	Pass	PK	5.467G	61.26	68.20	-6.94	3	Horizontal	325	2.42
5530MHz	Pass	PK	5.529G	101.62	Inf	-Inf	3	Horizontal	325	2.42
5530MHz	Pass	PK	5.773G	61.90	68.20	-6.30	3	Horizontal	325	2.42
5530MHz	Pass	AV	11.06336G	42.00	54.00	-12.00	3	Vertical	44	1.51
5530MHz	Pass	PK	11.02432G	55.81	74.00	-18.19	3	Vertical	44	1.51
5530MHz	Pass	AV	11.09856G	41.13	54.00	-12.87	3	Horizontal	256	1.50
5530MHz	Pass	PK	11.07392G	54.82	74.00	-19.18	3	Horizontal	256	1.50
5610MHz	Pass	AV	5.46G	50.76	54.00	-3.24	3	Vertical	341	1.87
5610MHz	Pass	AV	5.608G	107.47	Inf	-Inf	3	Vertical	341	1.87
5610MHz	Pass	PK	5.413G	62.98	74.00	-11.02	3	Vertical	341	1.87


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5610MHz	Pass	PK	5.467G	66.08	68.20	-2.12	3	Vertical	341	1.87
5610MHz	Pass	PK	5.607G	119.11	Inf	-Inf	3	Vertical	341	1.87
5610MHz	Pass	PK	5.725G	66.16	68.20	-2.04	3	Vertical	341	1.87
5610MHz	Pass	AV	5.46G	48.60	54.00	-5.40	3	Horizontal	50	1.50
5610MHz	Pass	AV	5.605G	96.99	Inf	-Inf	3	Horizontal	50	1.50
5610MHz	Pass	PK	5.415G	60.91	74.00	-13.09	3	Horizontal	50	1.50
5610MHz	Pass	PK	5.461G	60.14	68.20	-8.06	3	Horizontal	50	1.50
5610MHz	Pass	PK	5.603G	108.64	Inf	-Inf	3	Horizontal	50	1.50
5610MHz	Pass	PK	5.727G	62.46	68.20	-5.74	3	Horizontal	50	1.50
5610MHz	Pass	AV	11.22432G	43.13	54.00	-10.87	3	Vertical	41	1.36
5610MHz	Pass	PK	11.18176G	55.47	74.00	-18.53	3	Vertical	41	1.36
5610MHz	Pass	AV	11.22176G	42.58	54.00	-11.42	3	Horizontal	290	1.16
5610MHz	Pass	PK	11.24096G	55.46	74.00	-18.54	3	Horizontal	290	1.16
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.4596G	49.89	54.00	-4.11	3	Vertical	10	1.49
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.6864G	108.04	Inf	-Inf	3	Vertical	10	1.49
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.4596G	61.69	74.00	-12.31	3	Vertical	10	1.49
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.4692G	62.15	68.20	-6.05	3	Vertical	10	1.49
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.6864G	119.50	Inf	-Inf	3	Vertical	10	1.49
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.8952G	62.55	68.20	-5.65	3	Vertical	10	1.49
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.438G	48.41	54.00	-5.59	3	Horizontal	51	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.6864G	98.06	Inf	-Inf	3	Horizontal	51	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.4272G	60.55	74.00	-13.45	3	Horizontal	51	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.468G	60.33	68.20	-7.87	3	Horizontal	51	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.6888G	108.90	Inf	-Inf	3	Horizontal	51	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.9888G	62.48	68.20	-5.72	3	Horizontal	51	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	AV	11.39248G	42.62	54.00	-11.38	3	Vertical	51	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	11.392G	55.33	74.00	-18.67	3	Vertical	51	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	AV	11.38G	42.68	54.00	-11.32	3	Horizontal	281	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	11.3832G	55.74	74.00	-18.26	3	Horizontal	281	1.50
802.11be EHT160_Nss1(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.15G	53.55	54.00	-0.45	3	Vertical	356	1.43
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.2524G	100.70	Inf	-Inf	3	Vertical	356	1.43
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.3532G	52.54	54.00	-1.46	3	Vertical	356	1.43
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.148G	69.03	74.00	-4.97	3	Vertical	356	1.43
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.2524G	112.09	Inf	-Inf	3	Vertical	356	1.43
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.4012G	64.66	74.00	-9.34	3	Vertical	356	1.43
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.4948G	62.32	68.20	-5.88	3	Vertical	356	1.43
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.046G	48.37	54.00	-5.63	3	Horizontal	25	1.60
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.2548G	86.18	Inf	-Inf	3	Horizontal	25	1.60
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.4552G	49.04	54.00	-4.96	3	Horizontal	25	1.60
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.01G	60.84	74.00	-13.16	3	Horizontal	25	1.60
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.256G	97.56	Inf	-Inf	3	Horizontal	25	1.60
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.3916G	61.11	74.00	-12.89	3	Horizontal	25	1.60
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.4636G	61.51	68.20	-6.69	3	Horizontal	25	1.60
5250MHz Straddle 5.15-5.25GHz	Pass	PK	10.5448G	53.78	68.20	-14.42	3	Vertical	181	1.50
5250MHz Straddle 5.15-5.25GHz	Pass	PK	10.48816G	53.49	68.20	-14.71	3	Horizontal	74	2.91
5570MHz	Pass	AV	5.444G	53.19	54.00	-0.81	3	Vertical	346	1.50
5570MHz	Pass	AV	5.57G	106.98	Inf	-Inf	3	Vertical	346	1.50
5570MHz	Pass	PK	5.294G	62.19	68.20	-6.01	3	Vertical	346	1.50
5570MHz	Pass	PK	5.45G	65.95	74.00	-8.05	3	Vertical	346	1.50
5570MHz	Pass	PK	5.4644G	67.94	68.20	-0.26	3	Vertical	346	1.50
5570MHz	Pass	PK	5.5052G	110.49	Inf	-Inf	3	Vertical	346	1.50
5570MHz	Pass	PK	5.7476G	63.32	68.20	-4.88	3	Vertical	346	1.50
5570MHz	Pass	AV	5.4584G	48.99	54.00	-5.01	3	Horizontal	48	1.93
5570MHz	Pass	AV	5.57G	102.55	Inf	-Inf	3	Horizontal	48	1.93
5570MHz	Pass	PK	5.3264G	60.94	68.20	-7.26	3	Horizontal	48	1.93
5570MHz	Pass	PK	5.4596G	61.54	74.00	-12.46	3	Horizontal	48	1.93
5570MHz	Pass	PK	5.4608G	60.69	68.20	-7.51	3	Horizontal	48	1.93
5570MHz	Pass	PK	5.57G	103.67	Inf	-Inf	3	Horizontal	48	1.93
5570MHz	Pass	PK	5.8472G	63.12	68.20	-5.08	3	Horizontal	48	1.93
5570MHz	Pass	AV	11.19344G	41.59	54.00	-12.41	3	Vertical	308	1.50
5570MHz	Pass	PK	11.15344G	54.14	74.00	-19.86	3	Vertical	308	1.50



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5570MHz	Pass	AV	11.19696G	41.58	54.00	-12.42	3	Horizontal	28	1.50
5570MHz	Pass	PK	11.15408G	54.16	74.00	-19.84	3	Horizontal	28	1.50


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

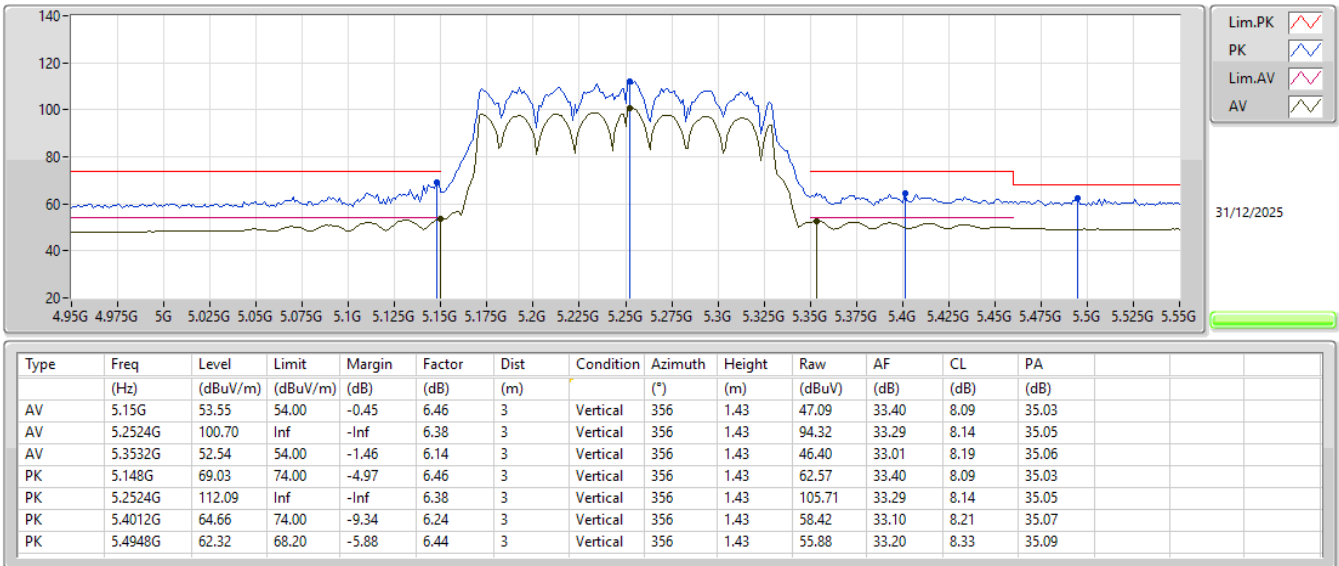


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

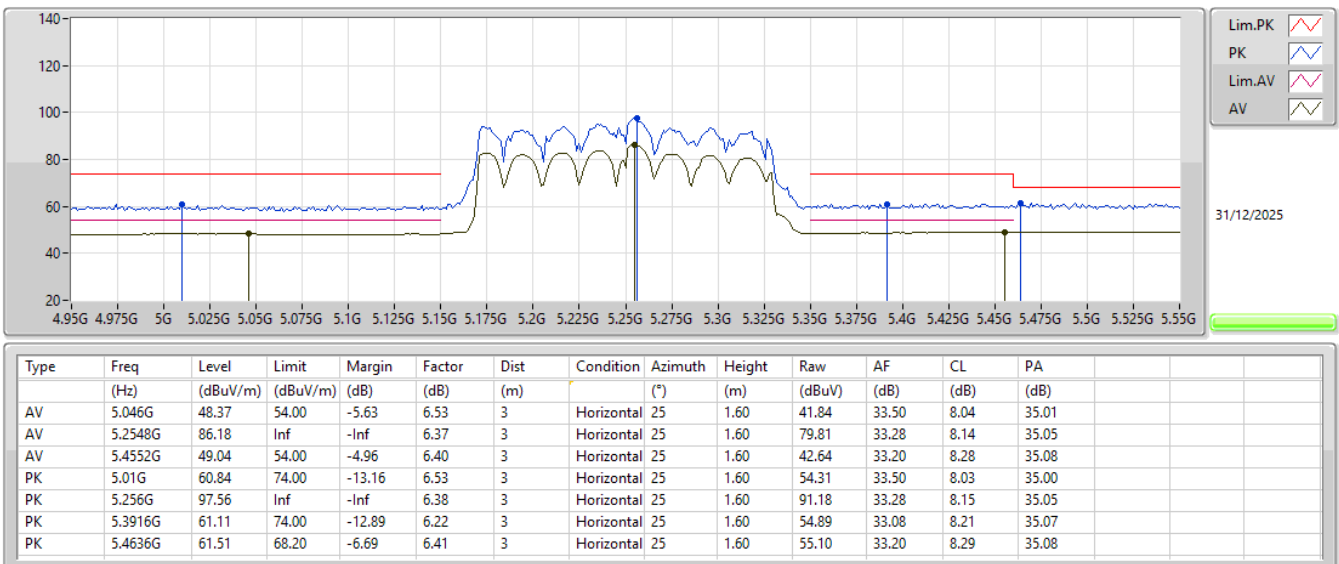


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

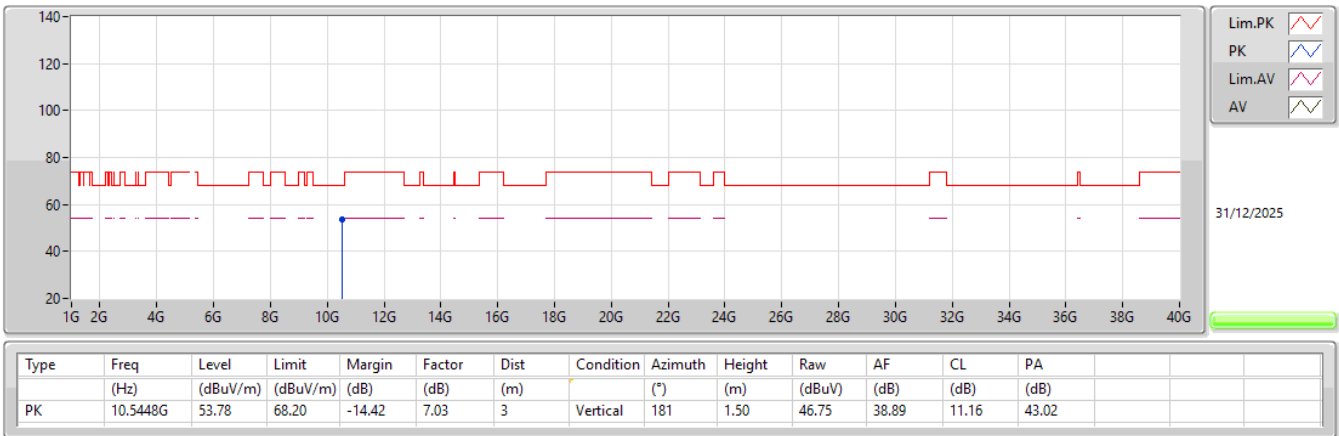


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

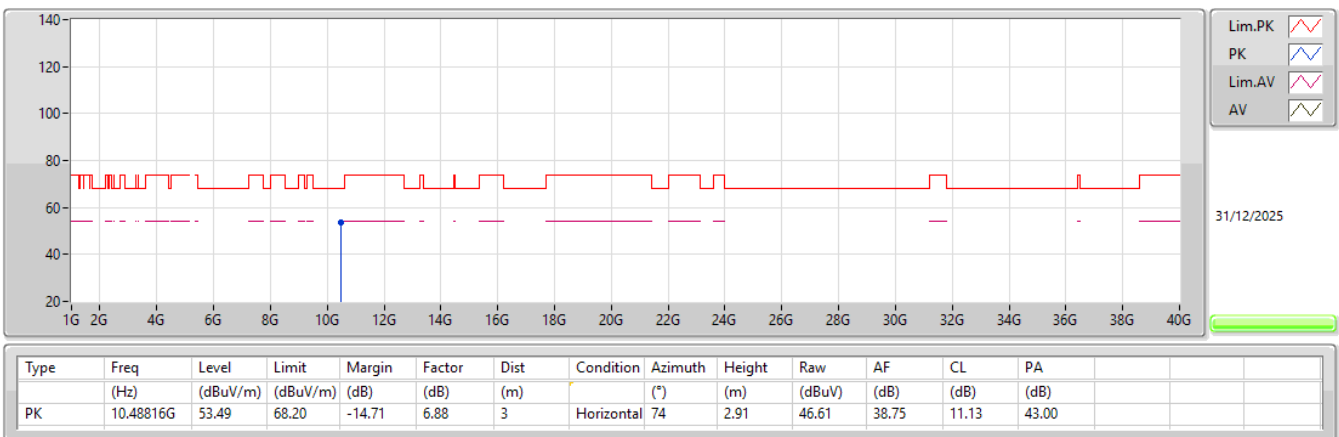


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

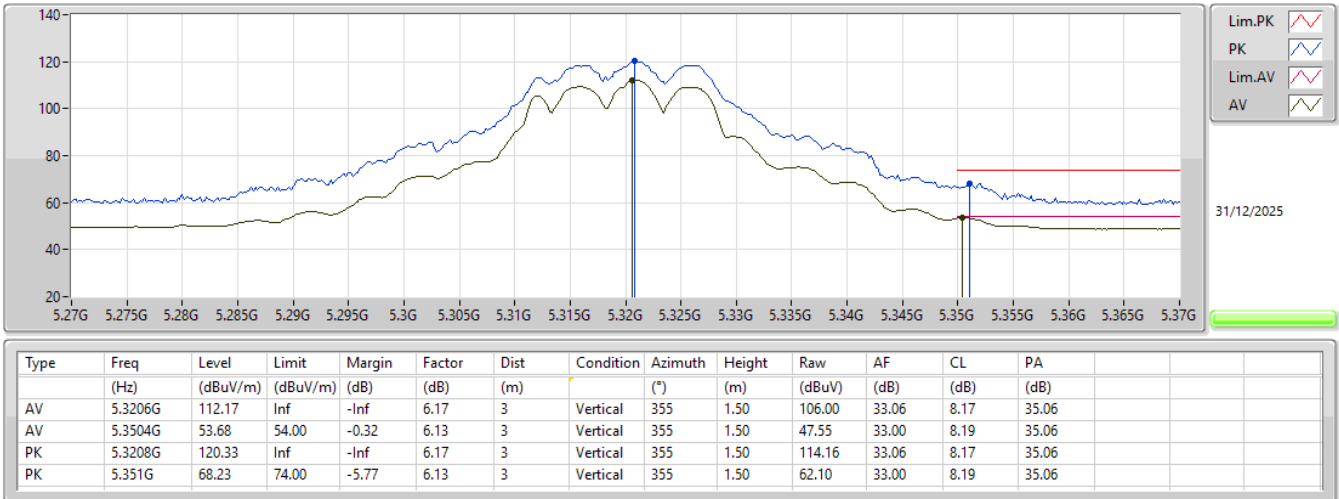


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

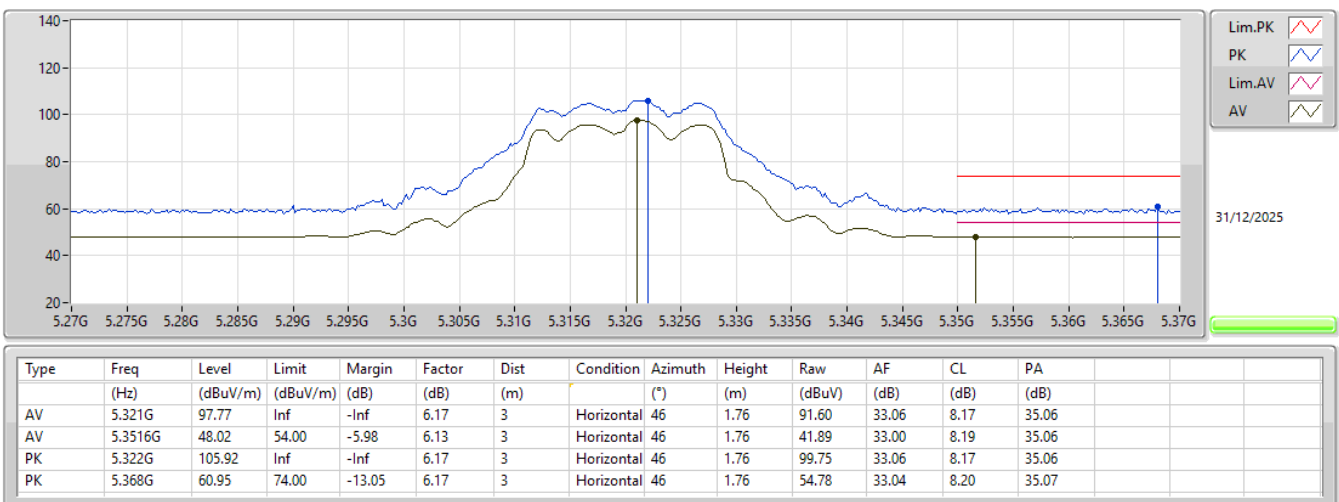


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

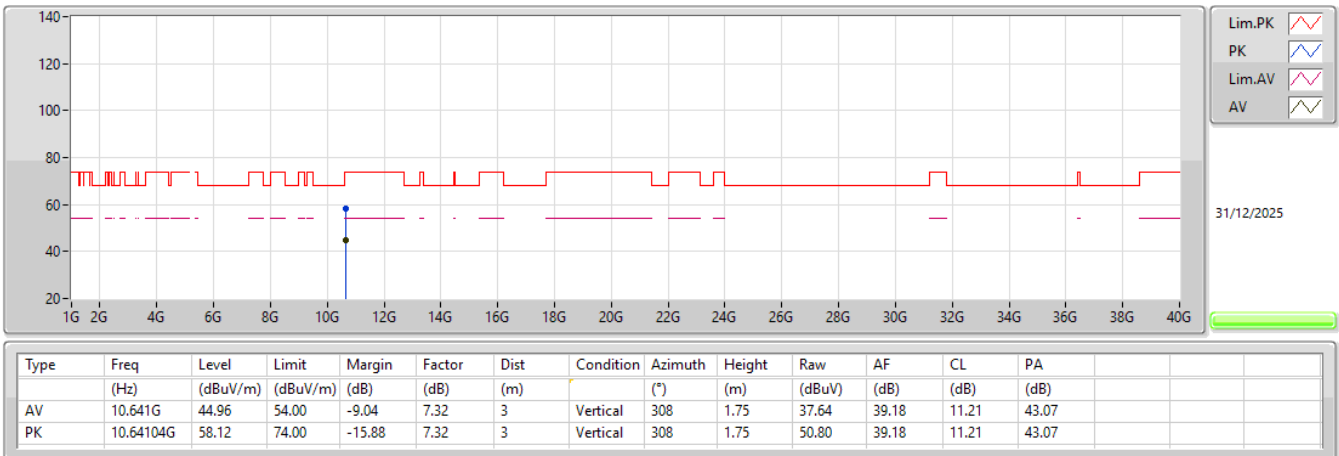


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

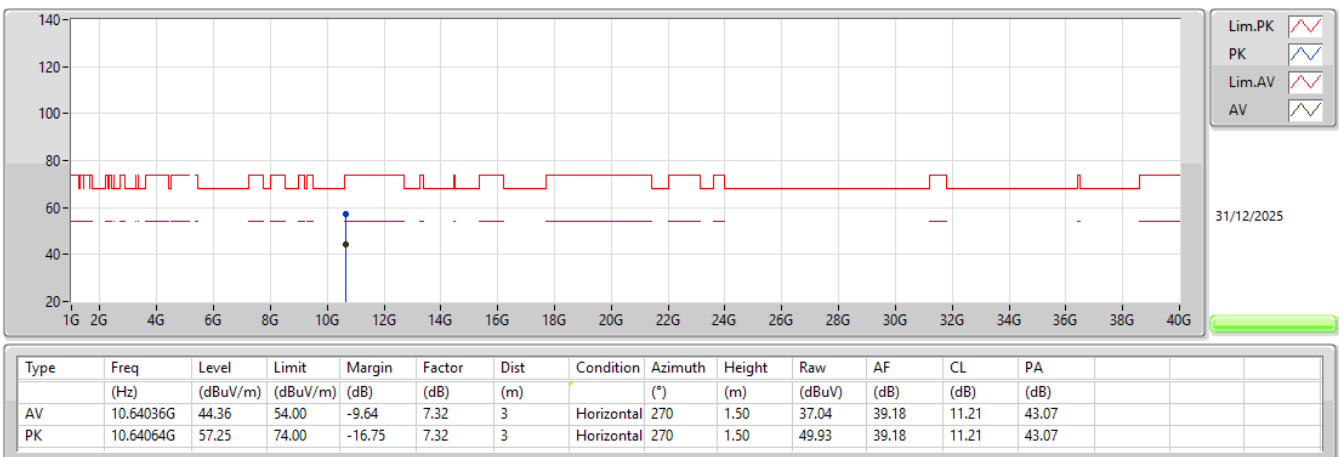


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

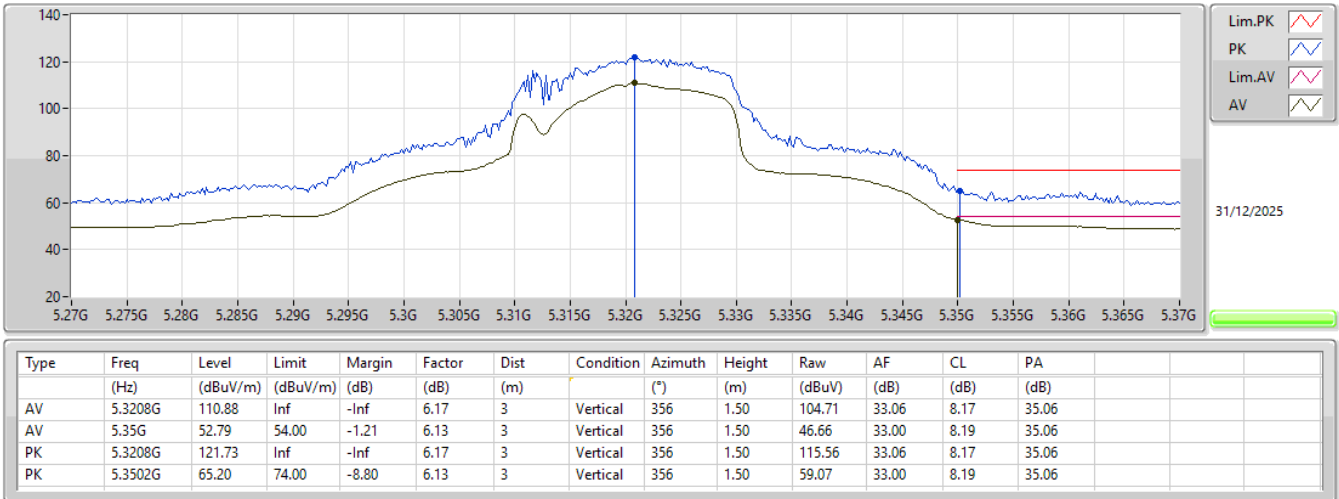


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

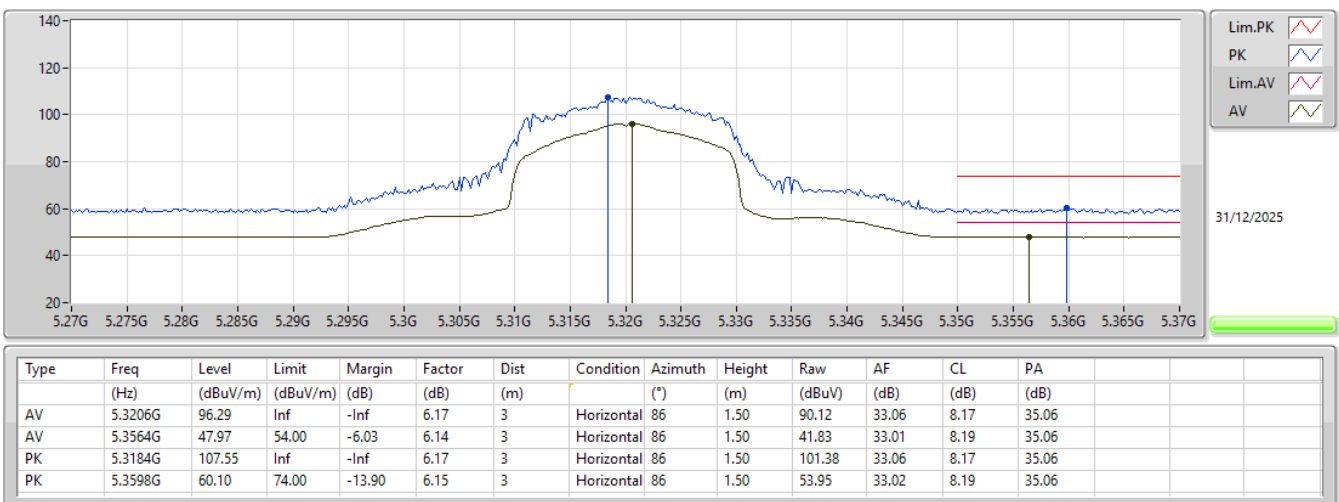


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

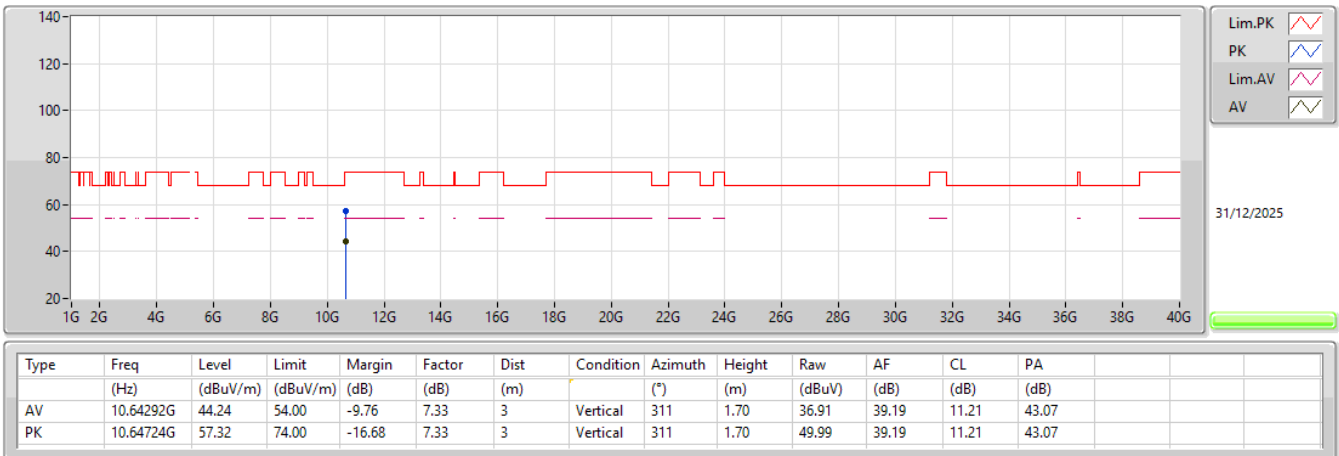


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

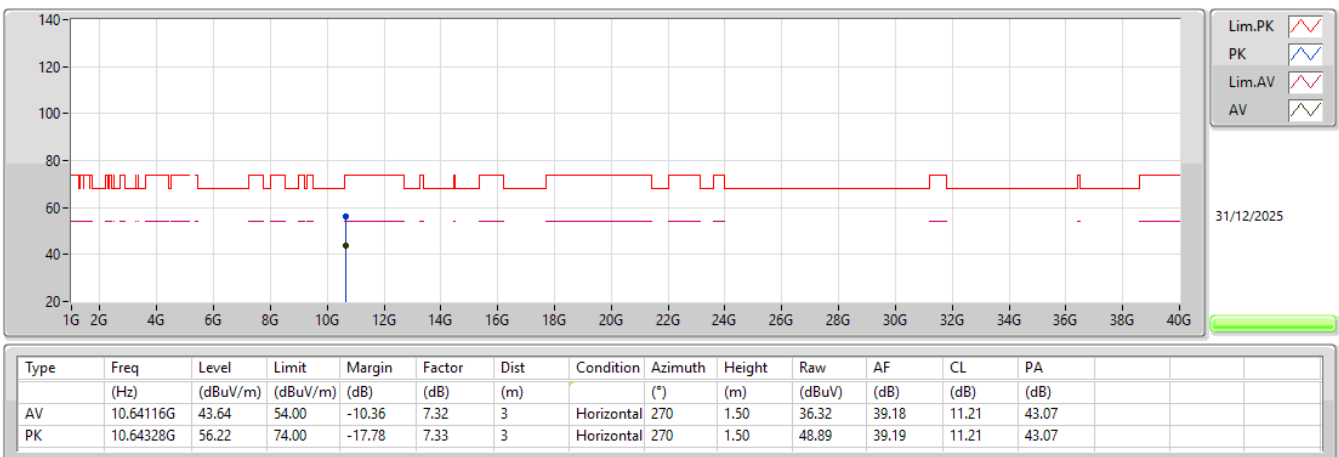


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

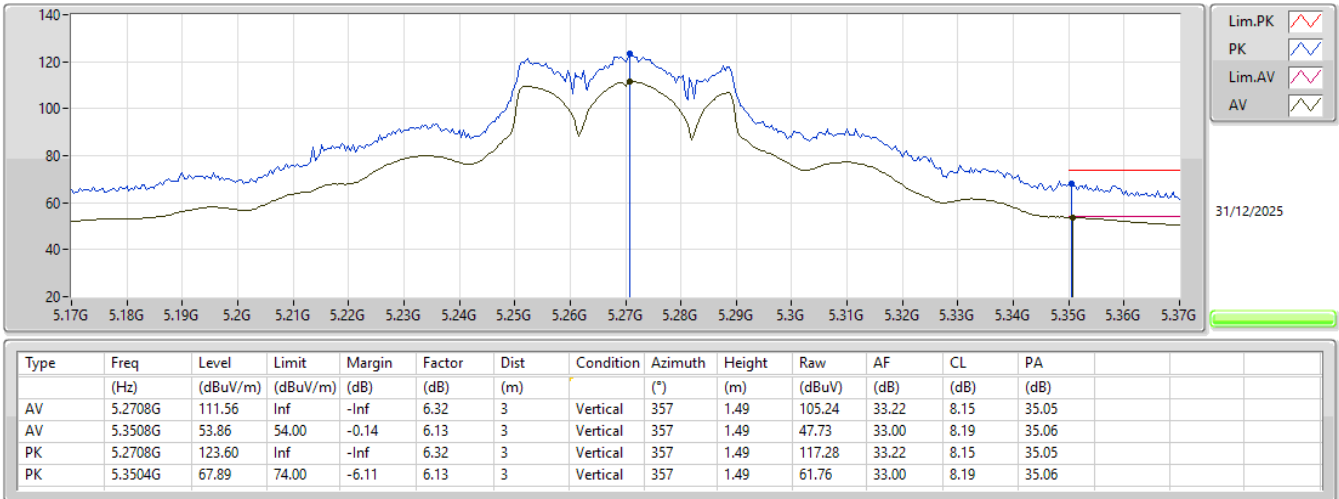


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

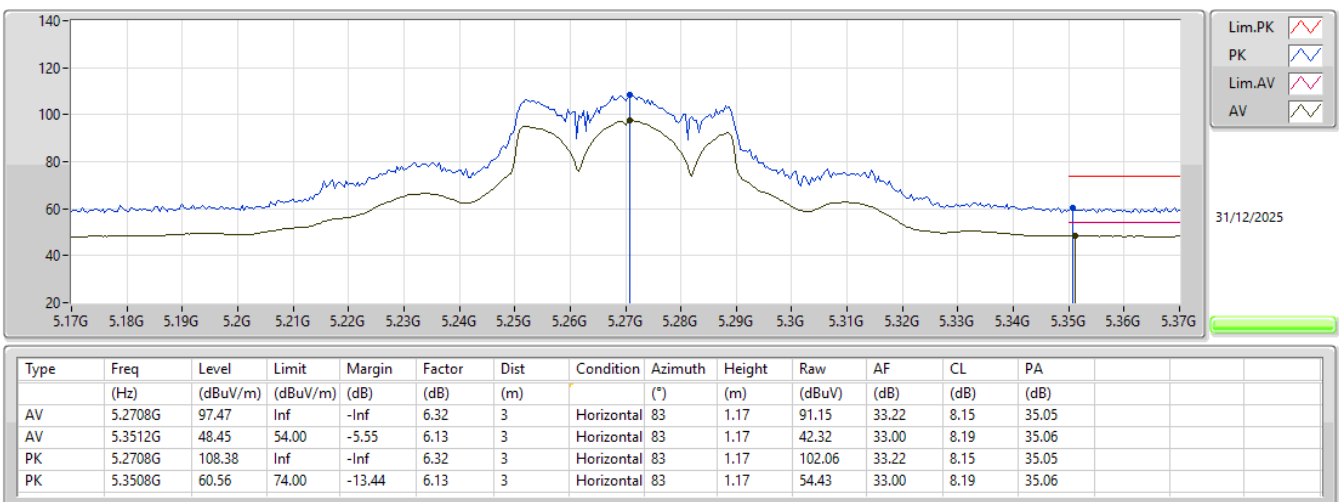


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

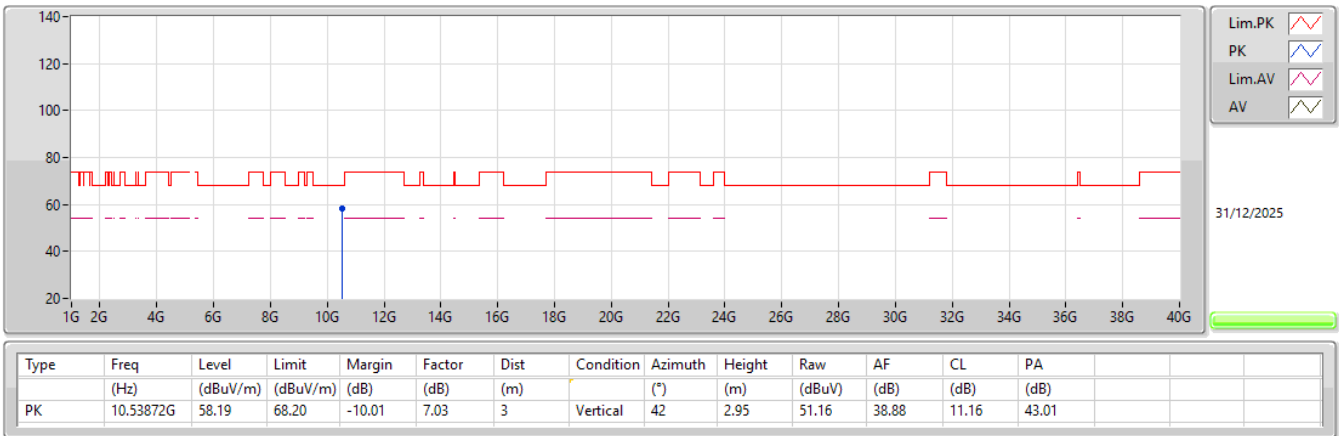


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

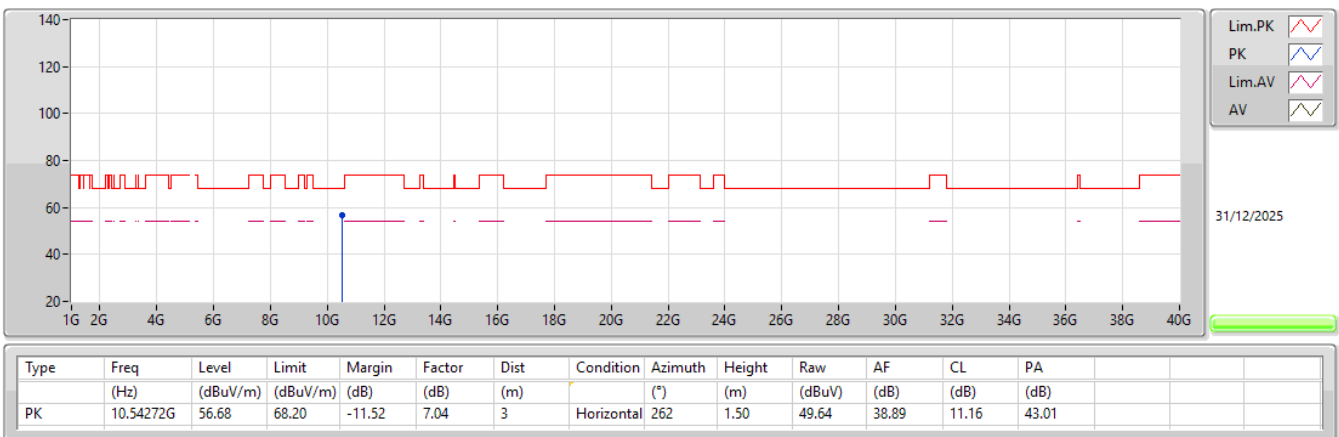


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

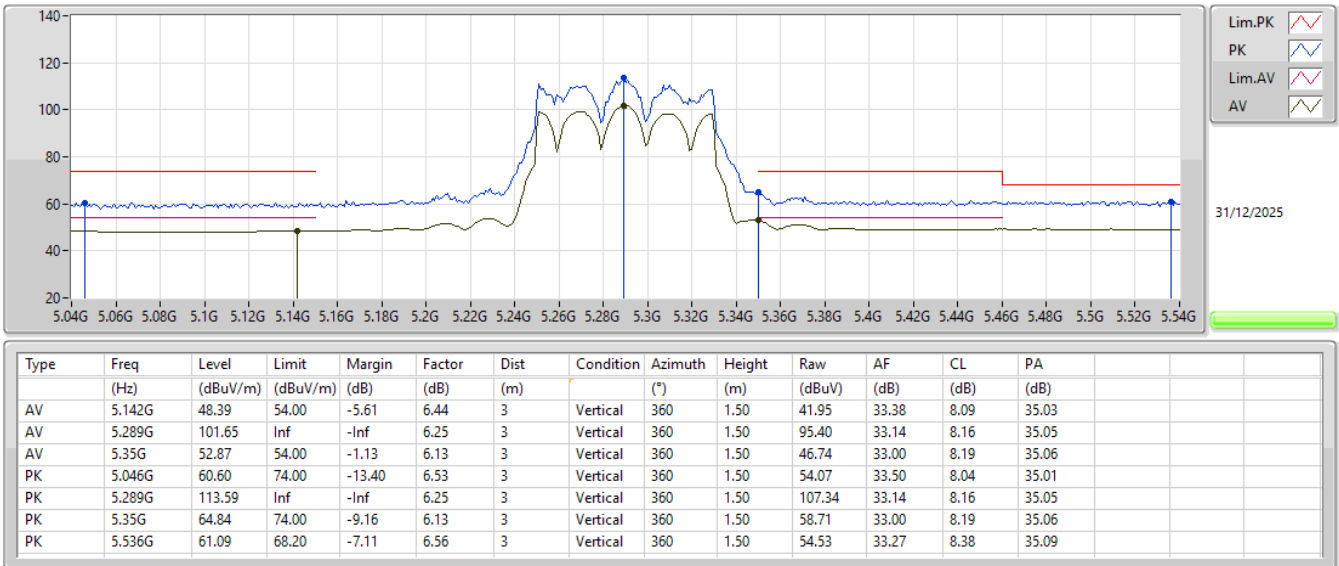


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

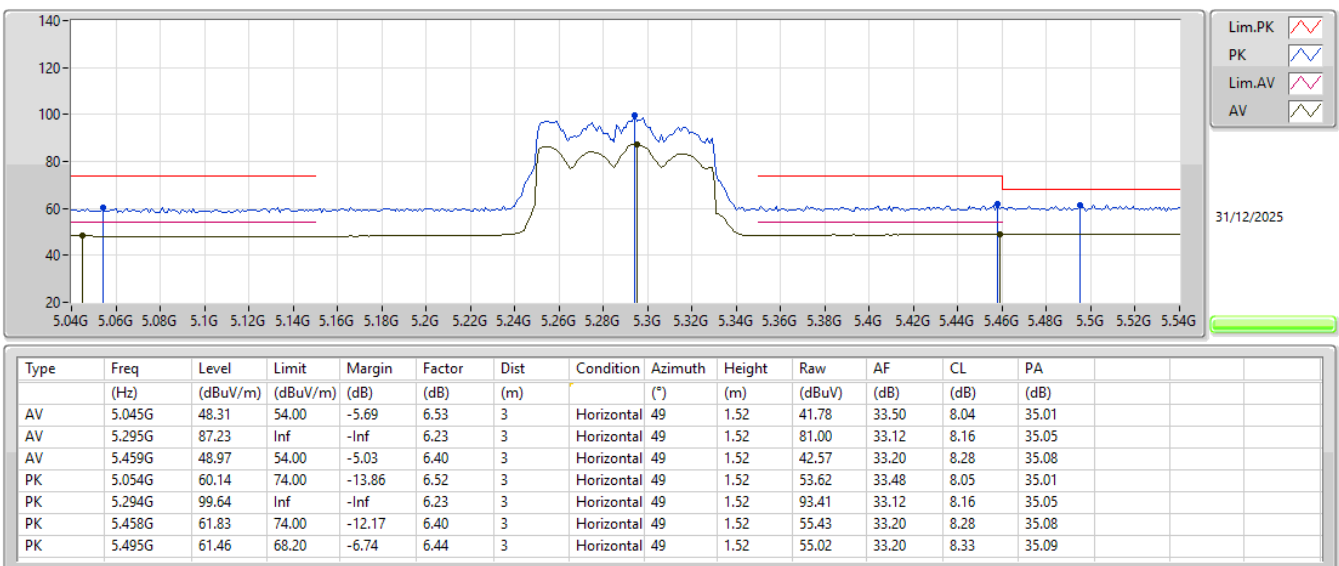


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

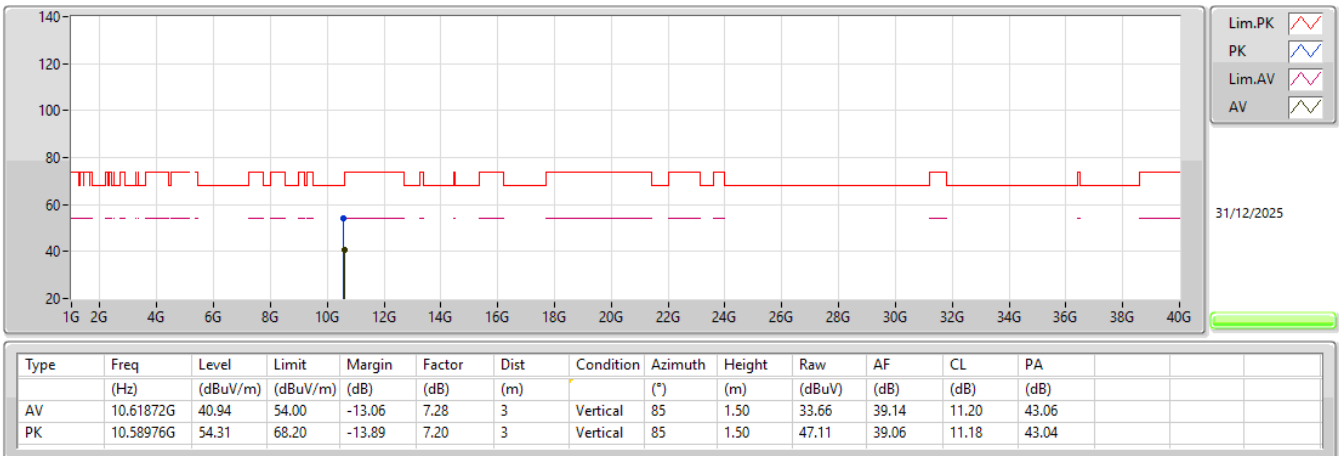


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

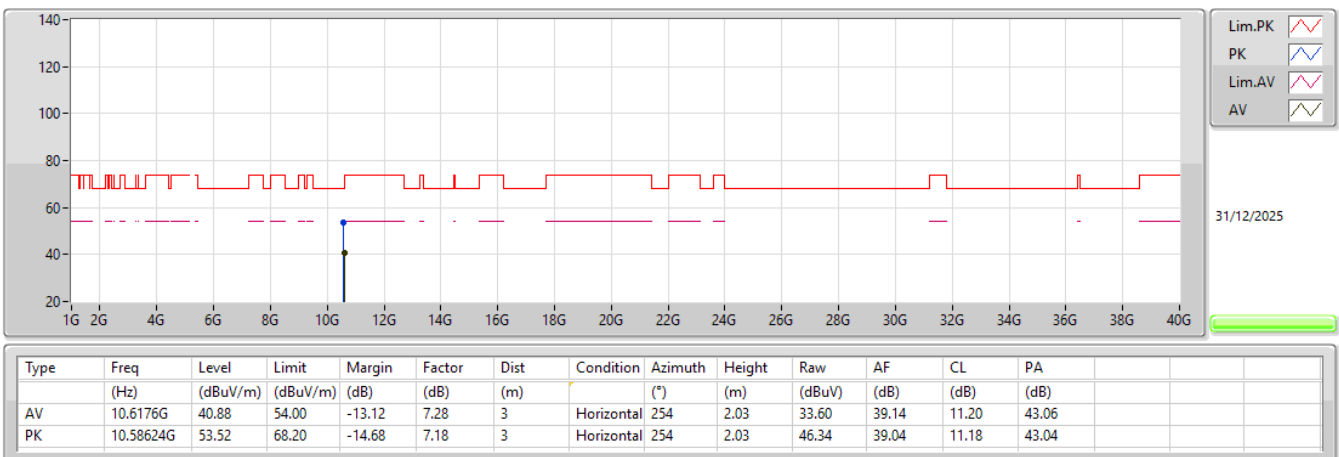


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

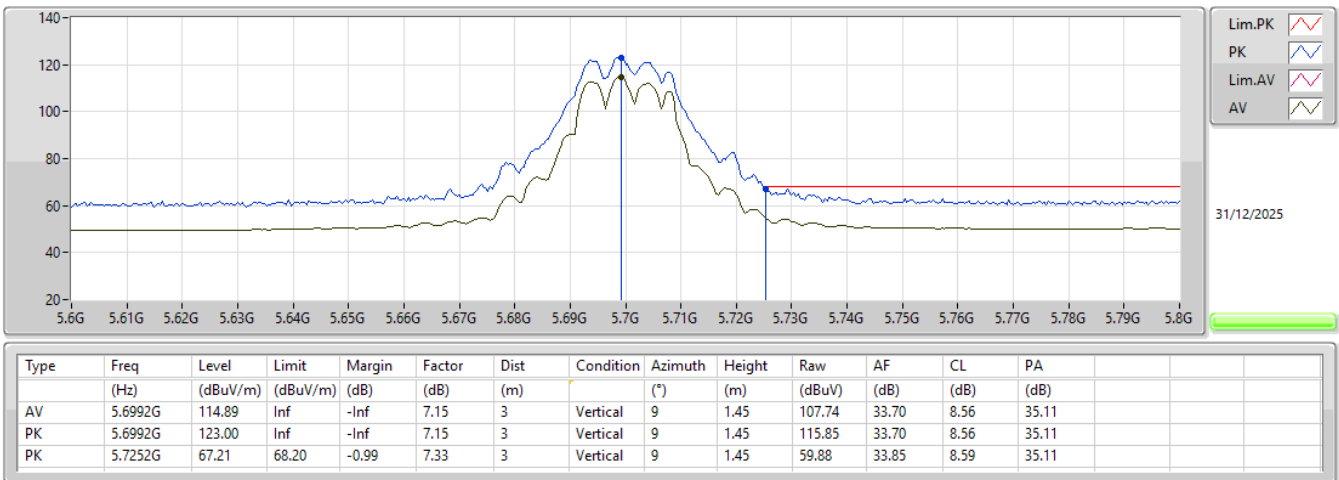


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

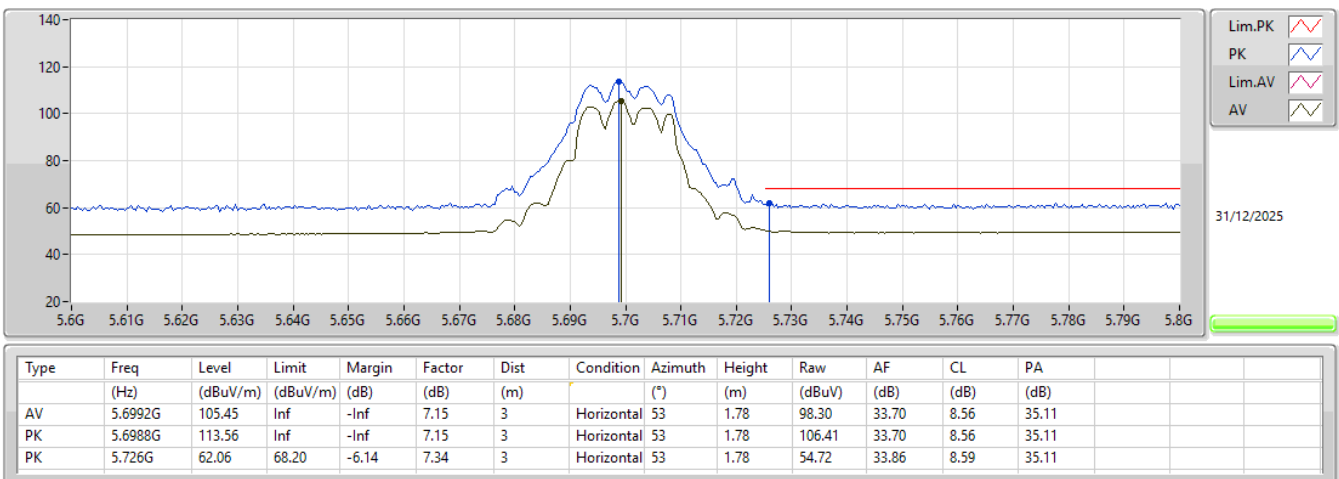


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

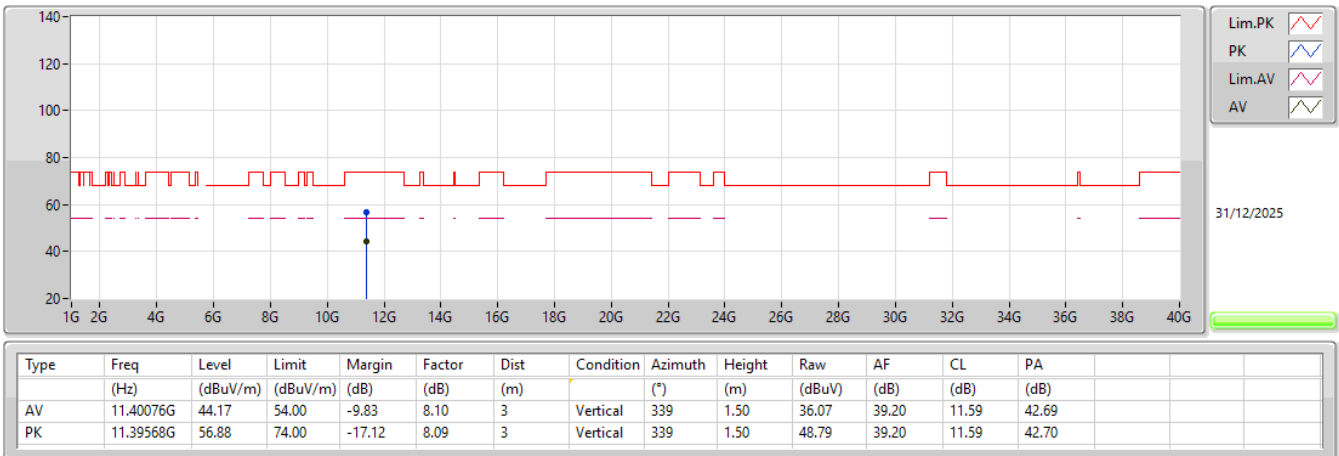


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

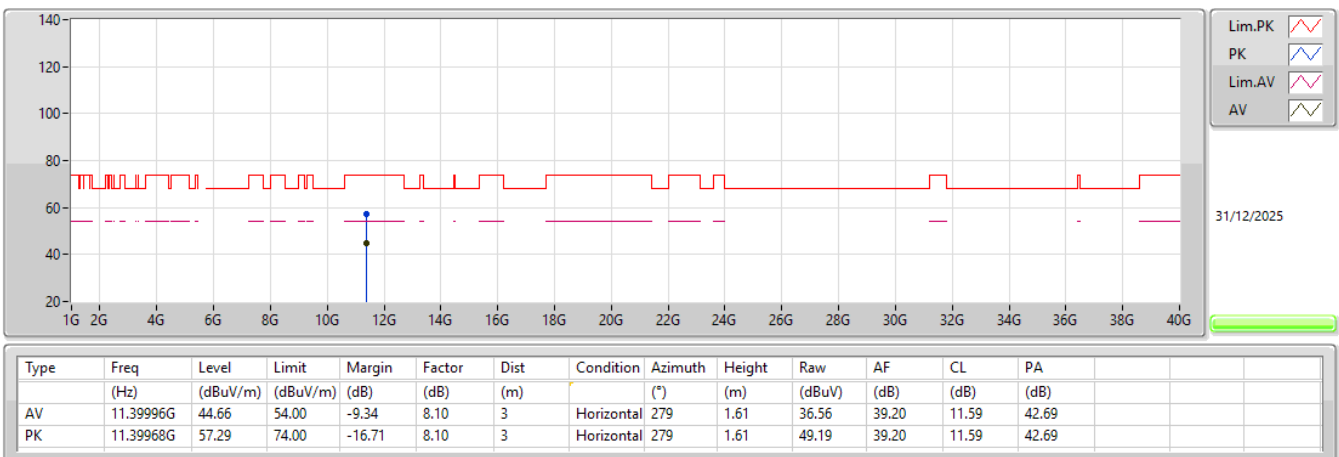


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

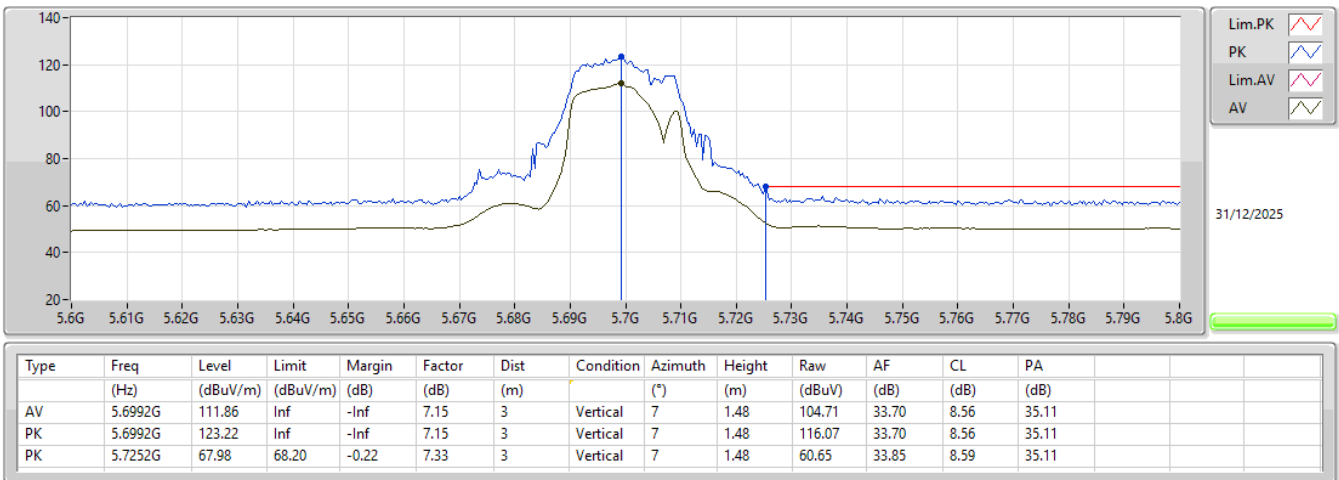


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

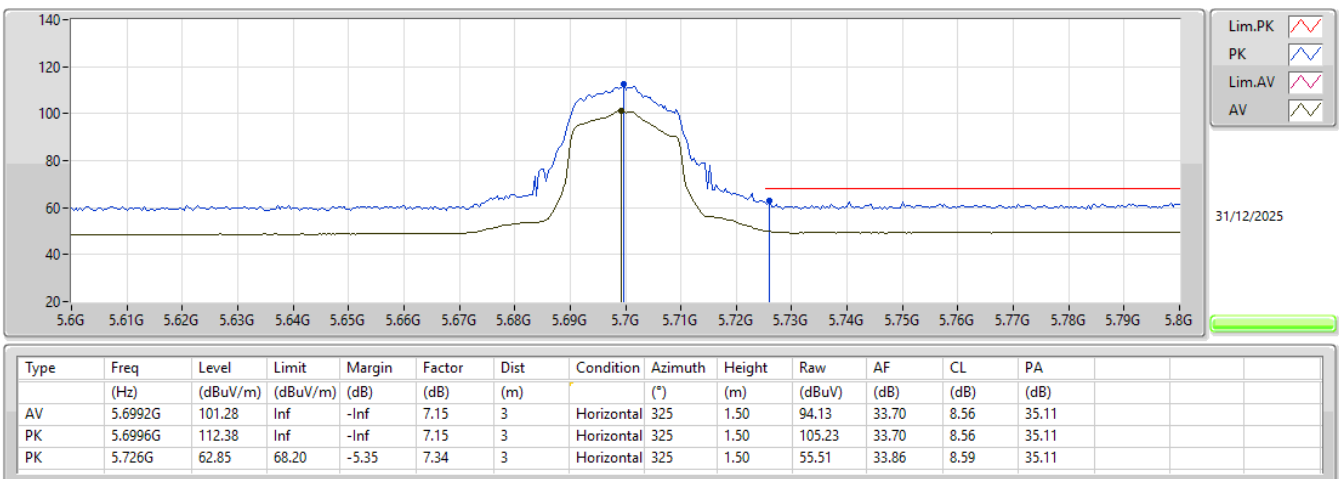


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

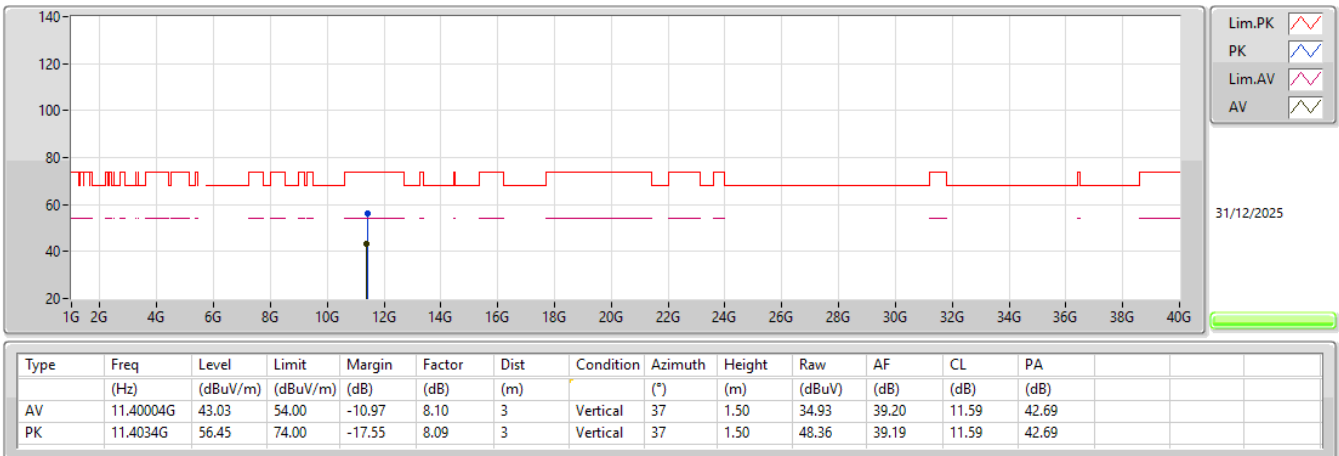


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

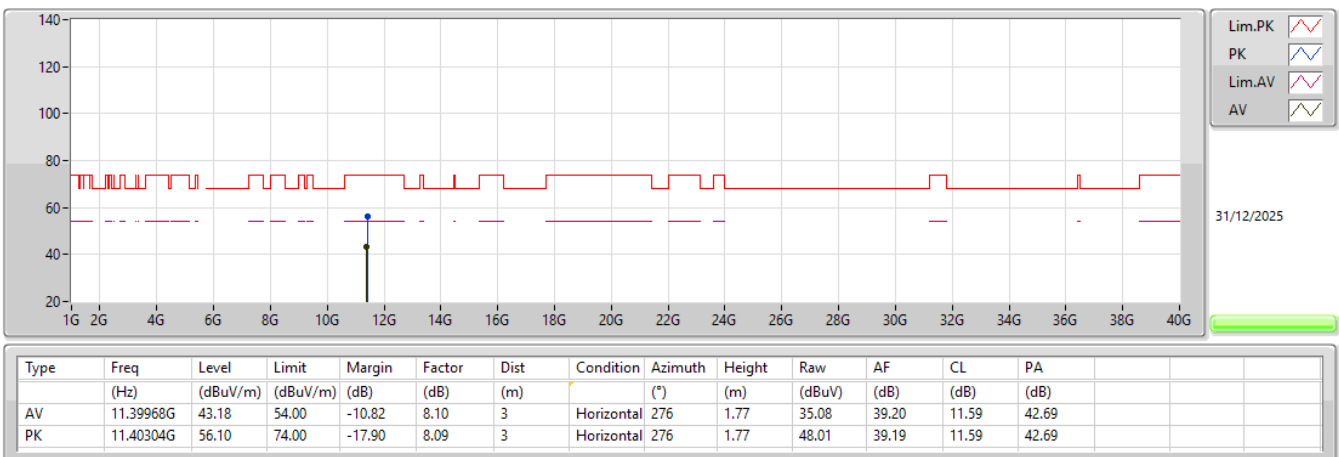

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5510MHz_TX

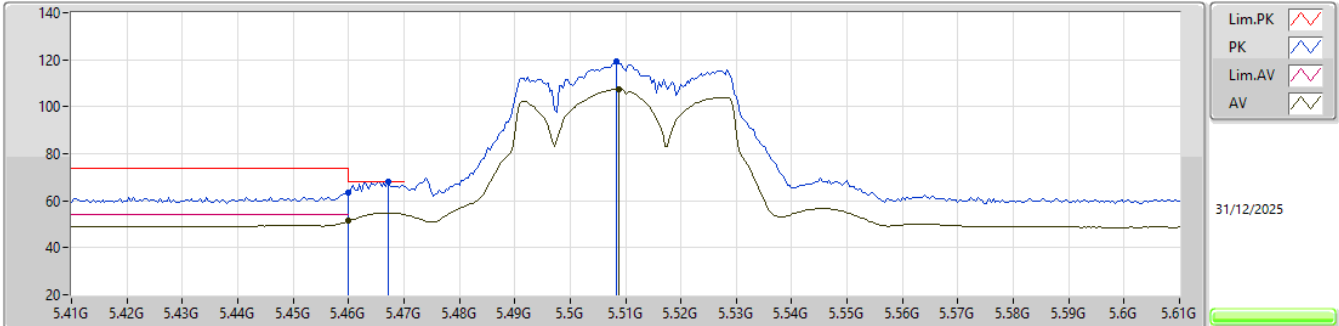

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.46G	51.38	54.00	-2.62	6.41	3	Vertical	4	1.50	44.97	33.20	8.29	35.08
AV	5.5088G	107.43	Inf	-Inf	6.48	3	Vertical	4	1.50	100.95	33.22	8.35	35.09
PK	5.46G	63.43	74.00	-10.57	6.41	3	Vertical	4	1.50	57.02	33.20	8.29	35.08
PK	5.4672G	68.01	68.20	-0.19	6.41	3	Vertical	4	1.50	61.60	33.20	8.29	35.08
PK	5.5084G	119.38	Inf	-Inf	6.48	3	Vertical	4	1.50	112.90	33.22	8.35	35.09

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5510MHz_TX

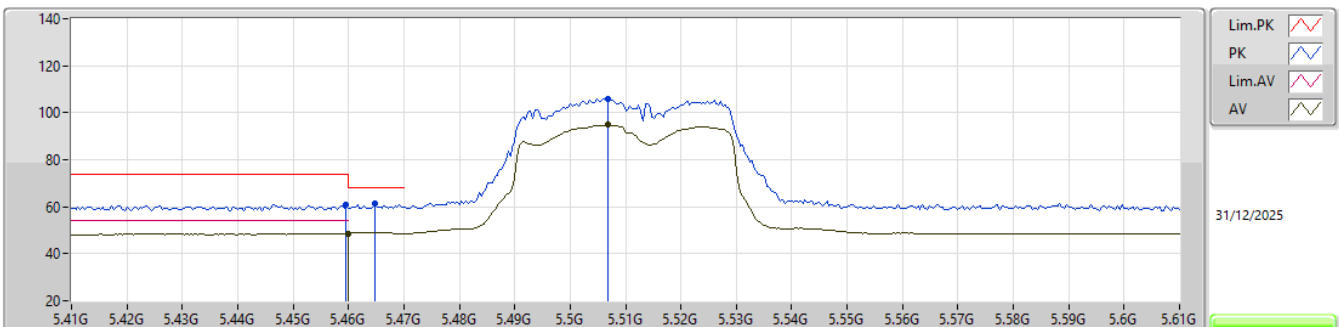

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.46G	48.65	54.00	-5.35	6.41	3	Horizontal	309	2.27	42.24	33.20	8.29	35.08
AV	5.5068G	94.75	Inf	-Inf	6.46	3	Horizontal	309	2.27	88.29	33.21	8.34	35.09
PK	5.4596G	61.07	74.00	-12.93	6.40	3	Horizontal	309	2.27	54.67	33.20	8.28	35.08
PK	5.4648G	61.39	68.20	-6.81	6.41	3	Horizontal	309	2.27	54.98	33.20	8.29	35.08
PK	5.5068G	106.12	Inf	-Inf	6.46	3	Horizontal	309	2.27	99.66	33.21	8.34	35.09


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5510MHz_TX

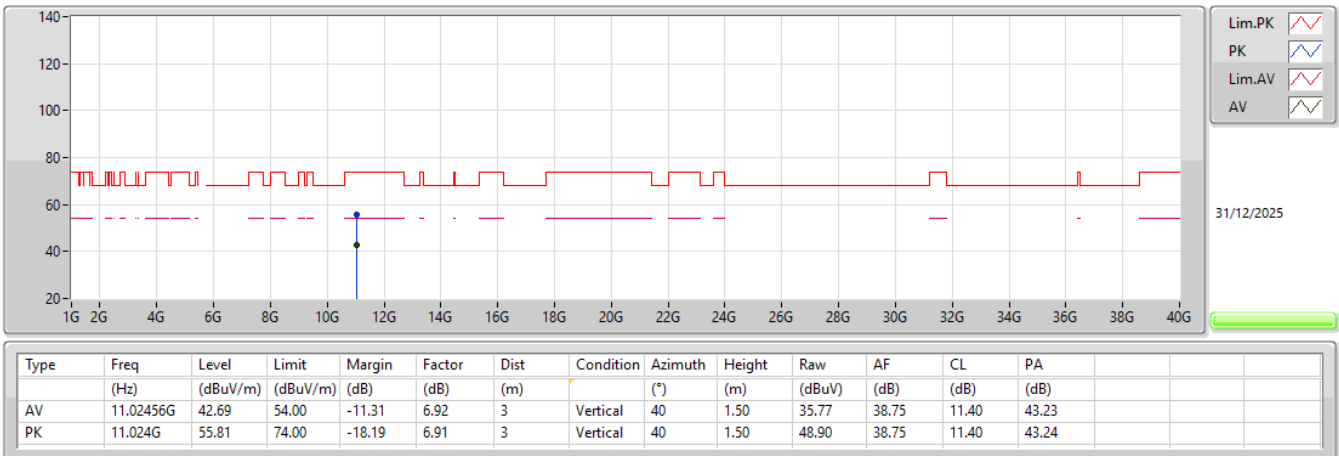


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5510MHz_TX

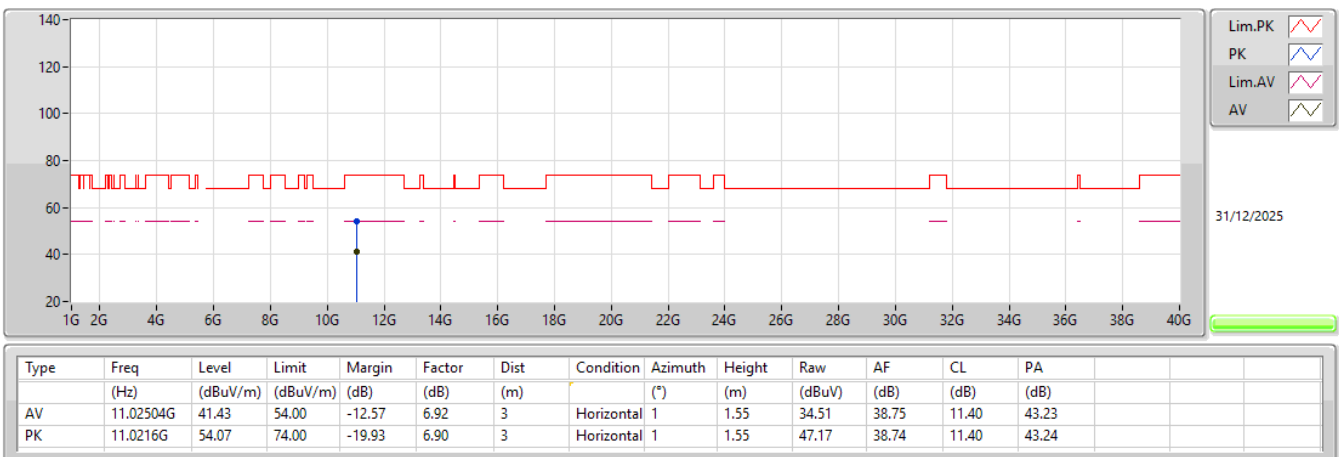

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5530MHz_TX

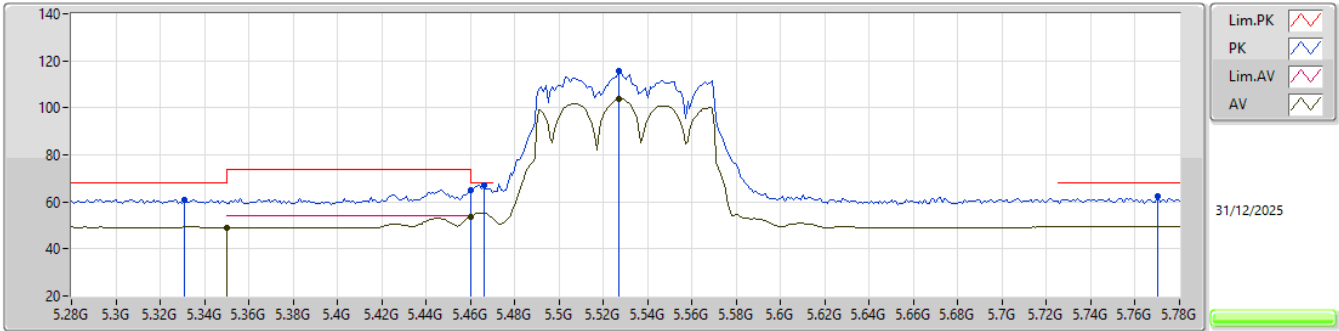

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	49.08	54.00	-4.92	6.13	3	Vertical	3	1.69	42.95	33.00	8.19	35.06
AV	5.46G	53.84	54.00	-0.16	6.41	3	Vertical	3	1.69	47.43	33.20	8.29	35.08
AV	5.527G	103.81	Inf	-Inf	6.53	3	Vertical	3	1.69	97.28	33.25	8.37	35.09
PK	5.331G	61.02	68.20	-7.18	6.16	3	Vertical	3	1.69	54.86	33.04	8.18	35.06
PK	5.46G	65.04	74.00	-8.96	6.41	3	Vertical	3	1.69	58.63	33.20	8.29	35.08
PK	5.466G	66.89	68.20	-1.31	6.41	3	Vertical	3	1.69	60.48	33.20	8.29	35.08
PK	5.527G	115.63	Inf	-Inf	6.53	3	Vertical	3	1.69	109.10	33.25	8.37	35.09
PK	5.77G	62.30	68.20	-5.90	7.63	3	Vertical	3	1.69	54.67	34.12	8.63	35.12

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5530MHz_TX

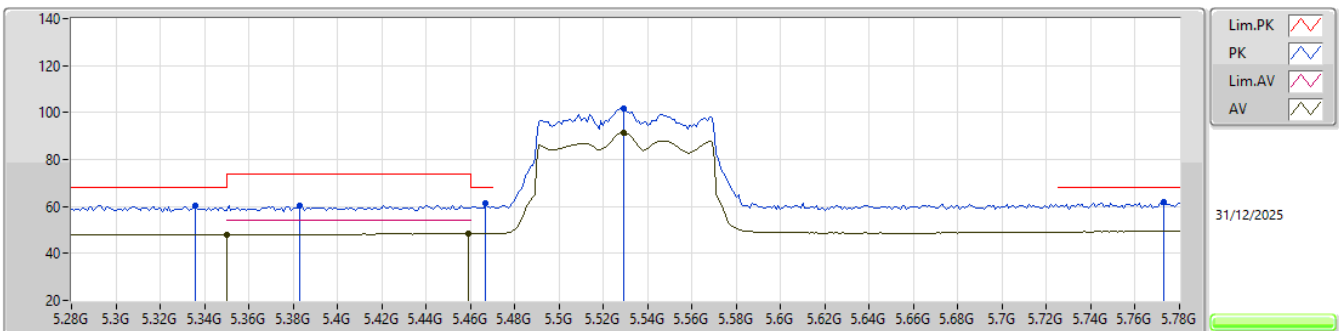

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	47.81	54.00	-6.19	6.13	3	Horizontal	325	2.42	41.68	33.00	8.19	35.06
AV	5.459G	48.64	54.00	-5.36	6.40	3	Horizontal	325	2.42	42.24	33.20	8.28	35.08
AV	5.529G	91.21	Inf	-Inf	6.54	3	Horizontal	325	2.42	84.67	33.26	8.37	35.09
PK	5.336G	60.58	68.20	-7.62	6.15	3	Horizontal	325	2.42	54.43	33.03	8.18	35.06
PK	5.383G	60.58	74.00	-13.42	6.20	3	Horizontal	325	2.42	54.38	33.07	8.20	35.07
PK	5.467G	61.26	68.20	-6.94	6.41	3	Horizontal	325	2.42	54.85	33.20	8.29	35.08
PK	5.529G	101.62	Inf	-Inf	6.54	3	Horizontal	325	2.42	95.08	33.26	8.37	35.09
PK	5.773G	61.90	68.20	-6.30	7.65	3	Horizontal	325	2.42	54.25	34.14	8.63	35.12


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5530MHz_TX

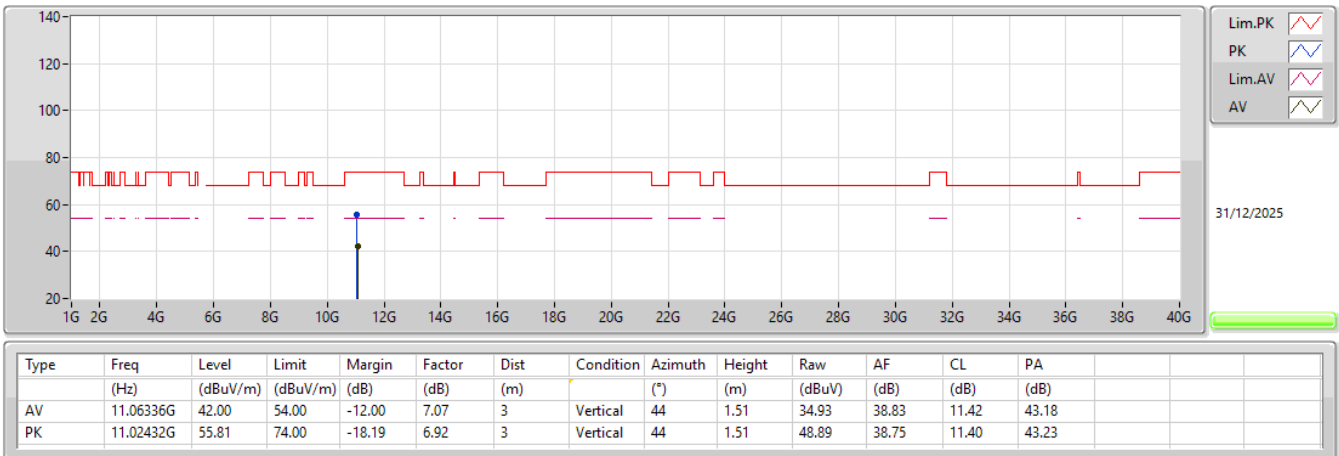


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5530MHz_TX

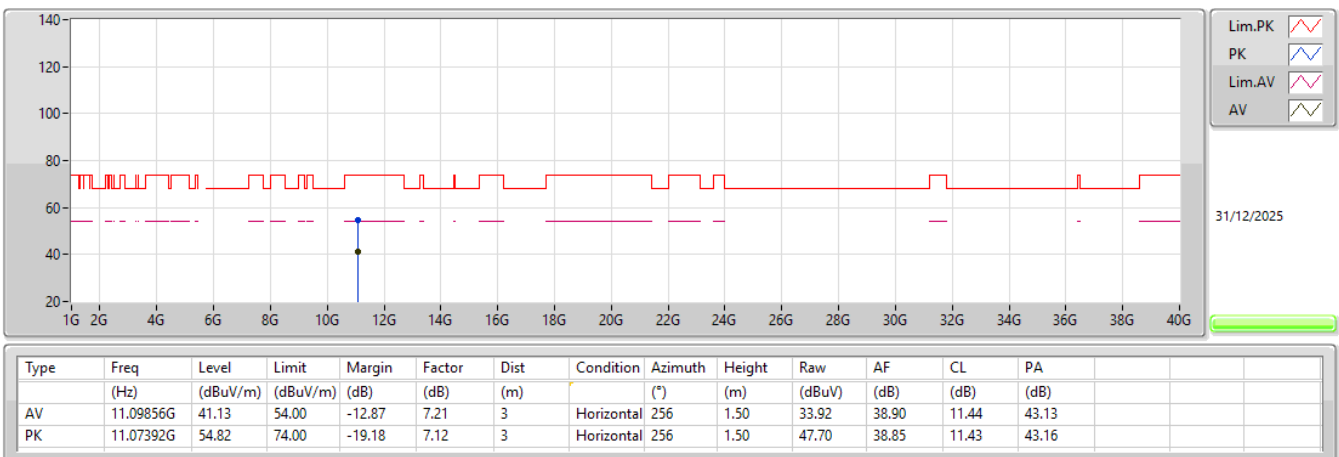


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

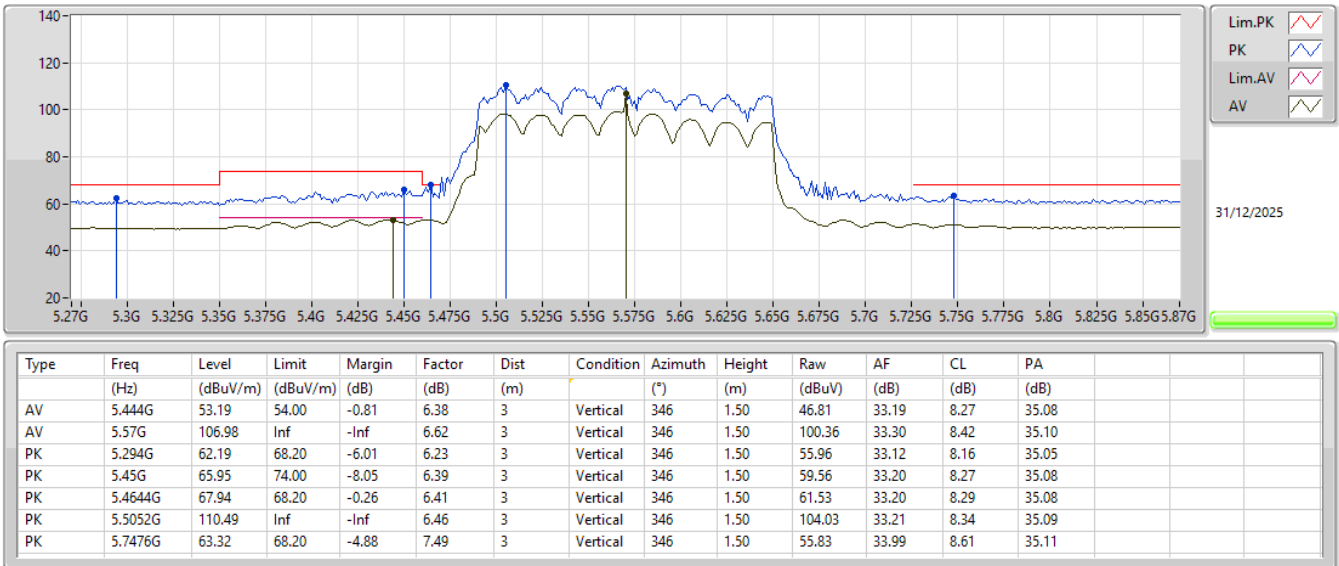


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

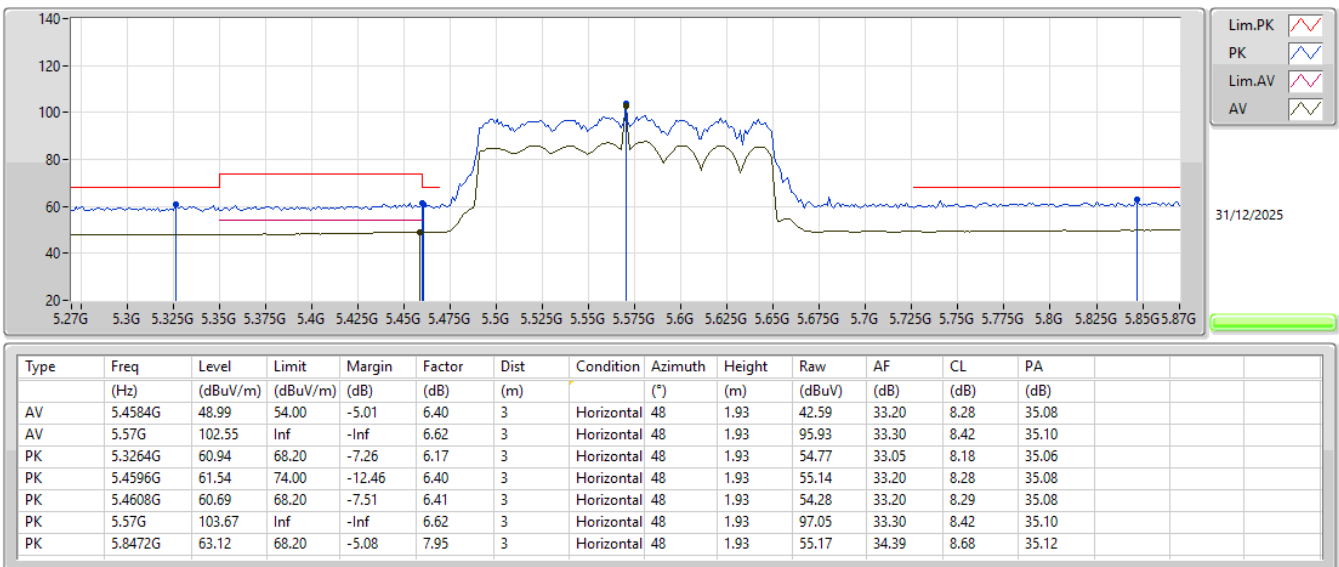


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

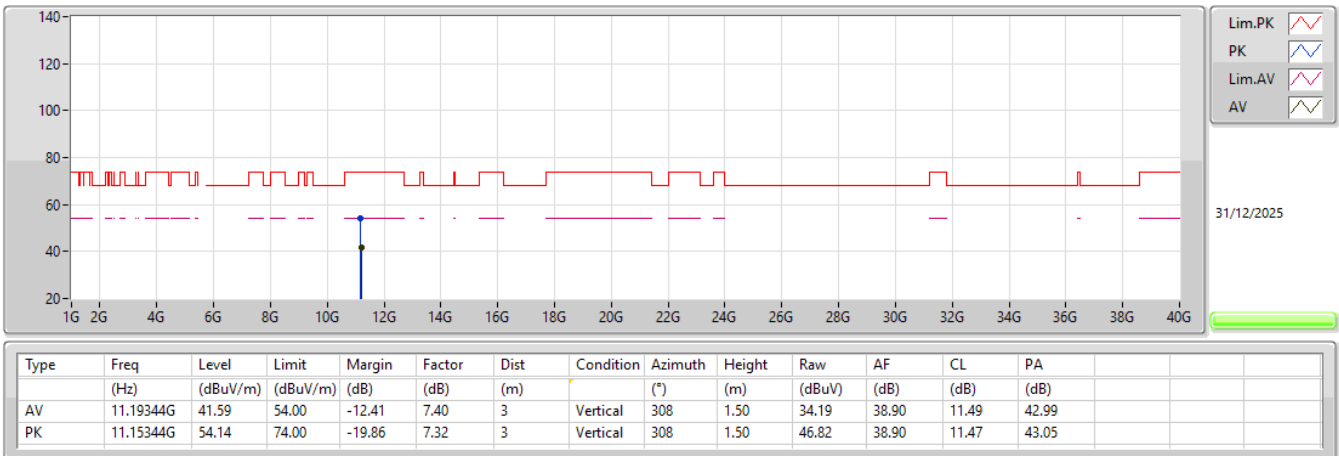

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

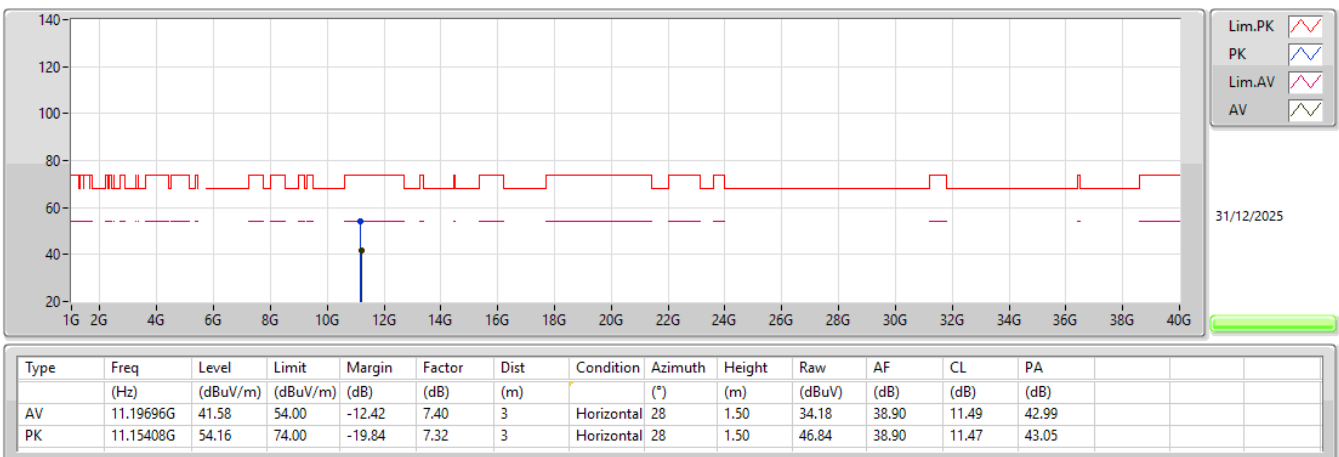

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	Pass	AV	5.15G	51.29	54.00	-2.71	3	Vertical	18	1.50
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	Pass	AV	5.35G	49.46	54.00	-4.54	3	Vertical	356	1.50
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	Pass	PK	5.136G	72.92	74.00	-1.08	3	Vertical	16	1.50
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	Pass	PK	5.464G	68.08	68.20	-0.12	3	Vertical	9	1.50
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	Pass	AV	5.378G	53.52	54.00	-0.48	3	Vertical	11	1.50
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	Pass	PK	5.6478G	67.90	68.20	-0.30	3	Vertical	353	1.50

**Result**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-	-	-
5210MHz_TX	Pass	AV	5.15G	51.29	54.00	-2.71	3	Vertical	18	1.50
5210MHz_TX	Pass	AV	5.195G	99.35	Inf	-Inf	3	Vertical	18	1.50
5210MHz_TX	Pass	AV	5.37G	44.17	54.00	-9.83	3	Vertical	18	1.50
5210MHz_TX	Pass	PK	5.145G	68.76	74.00	-5.24	3	Vertical	18	1.50
5210MHz_TX	Pass	PK	5.195G	111.11	Inf	-Inf	3	Vertical	18	1.50
5210MHz_TX	Pass	PK	5.39G	56.34	74.00	-17.66	3	Vertical	18	1.50
5210MHz_TX	Pass	AV	5.15G	45.37	54.00	-8.63	3	Horizontal	32	1.35
5210MHz_TX	Pass	AV	5.176G	89.09	Inf	-Inf	3	Horizontal	32	1.35
5210MHz_TX	Pass	AV	5.388G	43.55	54.00	-10.45	3	Horizontal	32	1.35
5210MHz_TX	Pass	PK	5.144G	58.42	74.00	-15.58	3	Horizontal	32	1.35
5210MHz_TX	Pass	PK	5.173G	100.25	Inf	-Inf	3	Horizontal	32	1.35
5210MHz_TX	Pass	PK	5.364G	55.63	74.00	-18.37	3	Horizontal	32	1.35
5210MHz_TX	Pass	PK	10.37904G	50.41	68.20	-17.79	3	Vertical	55	1.50
5210MHz_TX	Pass	PK	10.39984G	50.68	68.20	-17.52	3	Horizontal	75	1.54
5290MHz_TX	Pass	AV	5.15G	44.37	54.00	-9.63	3	Vertical	356	1.50
5290MHz_TX	Pass	AV	5.255G	99.30	Inf	-Inf	3	Vertical	356	1.50
5290MHz_TX	Pass	AV	5.35G	49.46	54.00	-4.54	3	Vertical	356	1.50
5290MHz_TX	Pass	PK	5.15G	57.26	74.00	-16.74	3	Vertical	356	1.50
5290MHz_TX	Pass	PK	5.253G	110.95	Inf	-Inf	3	Vertical	356	1.50
5290MHz_TX	Pass	PK	5.355G	65.82	74.00	-8.18	3	Vertical	356	1.50
5290MHz_TX	Pass	PK	5.535G	56.89	68.20	-11.31	3	Vertical	356	1.50
5290MHz_TX	Pass	AV	5.047G	43.47	54.00	-10.53	3	Horizontal	32	1.33
5290MHz_TX	Pass	AV	5.257G	87.55	Inf	-Inf	3	Horizontal	32	1.33
5290MHz_TX	Pass	AV	5.356G	43.98	54.00	-10.02	3	Horizontal	32	1.33
5290MHz_TX	Pass	PK	5.145G	55.41	74.00	-18.59	3	Horizontal	32	1.33
5290MHz_TX	Pass	PK	5.259G	99.89	Inf	-Inf	3	Horizontal	32	1.33
5290MHz_TX	Pass	PK	5.411G	56.75	74.00	-17.25	3	Horizontal	32	1.33
5290MHz_TX	Pass	PK	5.507G	55.36	68.20	-12.84	3	Horizontal	32	1.33
5290MHz_TX	Pass	AV	10.64208G	39.02	54.00	-14.98	3	Vertical	5	1.01
5290MHz_TX	Pass	PK	10.62224G	51.26	74.00	-22.74	3	Vertical	5	1.01
5290MHz_TX	Pass	AV	10.64144G	38.94	54.00	-15.06	3	Horizontal	160	2.32
5290MHz_TX	Pass	PK	10.51536G	50.85	68.20	-17.35	3	Horizontal	160	2.32
5530MHz_TX	Pass	AV	5.35G	44.50	54.00	-9.50	3	Vertical	9	1.50
5530MHz_TX	Pass	AV	5.453G	50.07	54.00	-3.93	3	Vertical	9	1.50
5530MHz_TX	Pass	AV	5.506G	99.80	Inf	-Inf	3	Vertical	9	1.50
5530MHz_TX	Pass	PK	5.299G	57.11	68.20	-11.09	3	Vertical	9	1.50
5530MHz_TX	Pass	PK	5.449G	67.42	74.00	-6.58	3	Vertical	9	1.50
5530MHz_TX	Pass	PK	5.464G	68.08	68.20	-0.12	3	Vertical	9	1.50
5530MHz_TX	Pass	PK	5.528G	110.78	Inf	-Inf	3	Vertical	9	1.50
5530MHz_TX	Pass	PK	5.769G	57.11	68.20	-11.09	3	Vertical	9	1.50
5530MHz_TX	Pass	AV	5.35G	43.23	54.00	-10.77	3	Horizontal	29	1.50
5530MHz_TX	Pass	AV	5.459G	44.01	54.00	-9.99	3	Horizontal	29	1.50
5530MHz_TX	Pass	AV	5.502G	84.62	Inf	-Inf	3	Horizontal	29	1.50
5530MHz_TX	Pass	PK	5.306G	55.43	68.20	-12.77	3	Horizontal	29	1.50
5530MHz_TX	Pass	PK	5.455G	55.30	74.00	-18.70	3	Horizontal	29	1.50
5530MHz_TX	Pass	PK	5.466G	55.34	68.20	-12.86	3	Horizontal	29	1.50
5530MHz_TX	Pass	PK	5.505G	95.71	Inf	-Inf	3	Horizontal	29	1.50
5530MHz_TX	Pass	PK	5.748G	57.63	68.20	-10.57	3	Horizontal	29	1.50
5530MHz_TX	Pass	AV	11.02192G	38.69	54.00	-15.31	3	Vertical	131	1.89
5530MHz_TX	Pass	PK	10.98608G	50.43	74.00	-23.57	3	Vertical	131	1.89
5530MHz_TX	Pass	AV	11.00784G	38.61	54.00	-15.39	3	Horizontal	166	2.93
5530MHz_TX	Pass	PK	11.02544G	49.98	74.00	-24.02	3	Horizontal	166	2.93
5610MHz_TX	Pass	AV	5.46G	47.02	54.00	-6.98	3	Vertical	352	1.50
5610MHz_TX	Pass	AV	5.583G	101.60	Inf	-Inf	3	Vertical	352	1.50
5610MHz_TX	Pass	PK	5.412G	63.58	74.00	-10.42	3	Vertical	352	1.50
5610MHz_TX	Pass	PK	5.466G	63.35	68.20	-4.85	3	Vertical	352	1.50
5610MHz_TX	Pass	PK	5.581G	112.76	Inf	-Inf	3	Vertical	352	1.50
5610MHz_TX	Pass	PK	5.725G	65.88	68.20	-2.32	3	Vertical	352	1.50
5610MHz_TX	Pass	AV	5.46G	43.87	54.00	-10.13	3	Horizontal	13	2.53
5610MHz_TX	Pass	AV	5.582G	92.06	Inf	-Inf	3	Horizontal	13	2.53


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5610MHz_TX	Pass	PK	5.408G	55.80	74.00	-18.20	3	Horizontal	13	2.53
5610MHz_TX	Pass	PK	5.465G	55.71	68.20	-12.49	3	Horizontal	13	2.53
5610MHz_TX	Pass	PK	5.584G	103.73	Inf	-Inf	3	Horizontal	13	2.53
5610MHz_TX	Pass	PK	5.768G	57.34	68.20	-10.86	3	Horizontal	13	2.53
5610MHz_TX	Pass	AV	11.27728G	38.85	54.00	-15.15	3	Vertical	217	1.28
5610MHz_TX	Pass	PK	11.26288G	50.64	74.00	-23.36	3	Vertical	217	1.28
5610MHz_TX	Pass	AV	11.28688G	38.93	54.00	-15.07	3	Horizontal	107	2.82
5610MHz_TX	Pass	PK	11.29488G	50.86	74.00	-23.14	3	Horizontal	107	2.82
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4596G	46.01	54.00	-7.99	3	Vertical	354	1.07
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.6648G	103.44	Inf	-Inf	3	Vertical	354	1.07
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4356G	58.26	74.00	-15.74	3	Vertical	354	1.07
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.462G	60.69	68.20	-7.51	3	Vertical	354	1.07
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.684G	113.81	Inf	-Inf	3	Vertical	354	1.07
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.8592G	58.03	68.20	-10.17	3	Vertical	354	1.07
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4548G	43.60	54.00	-10.40	3	Horizontal	56	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.6828G	91.79	Inf	-Inf	3	Horizontal	56	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4404G	55.55	74.00	-18.45	3	Horizontal	56	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4668G	54.91	68.20	-13.29	3	Horizontal	56	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.6636G	102.87	Inf	-Inf	3	Horizontal	56	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.8952G	57.62	68.20	-10.58	3	Horizontal	56	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.40784G	39.04	54.00	-14.96	3	Vertical	309	2.95
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.34032G	51.39	74.00	-22.61	3	Vertical	309	2.95
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.44624G	39.15	54.00	-14.85	3	Horizontal	78	2.84
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.40912G	51.79	74.00	-22.21	3	Horizontal	78	2.84
5775MHz_TX	Pass	AV	5.7486G	104.17	Inf	-Inf	3	Vertical	353	1.50
5775MHz_TX	Pass	PK	5.6478G	67.90	68.20	-0.30	3	Vertical	353	1.50
5775MHz_TX	Pass	PK	5.7486G	115.66	Inf	-Inf	3	Vertical	353	1.50
5775MHz_TX	Pass	PK	5.9286G	57.26	68.20	-10.94	3	Vertical	353	1.50
5775MHz_TX	Pass	AV	5.7522G	96.40	Inf	-Inf	3	Horizontal	56	1.85
5775MHz_TX	Pass	PK	5.5986G	60.39	68.20	-7.81	3	Horizontal	56	1.85
5775MHz_TX	Pass	PK	5.751G	107.60	Inf	-Inf	3	Horizontal	56	1.85
5775MHz_TX	Pass	PK	5.9454G	56.95	68.20	-11.25	3	Horizontal	56	1.85
5775MHz_TX	Pass	AV	11.53656G	38.85	54.00	-15.15	3	Vertical	319	1.40
5775MHz_TX	Pass	PK	11.47128G	51.74	74.00	-22.26	3	Vertical	319	1.40
5775MHz_TX	Pass	AV	11.50392G	38.86	54.00	-15.14	3	Horizontal	249	1.08
5775MHz_TX	Pass	PK	11.5004G	51.05	74.00	-22.95	3	Horizontal	249	1.08
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.1264G	50.60	54.00	-3.40	3	Vertical	16	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.1972G	96.50	Inf	-Inf	3	Vertical	16	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.3676G	49.27	54.00	-4.73	3	Vertical	16	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.136G	72.92	74.00	-1.08	3	Vertical	16	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.196G	108.10	Inf	-Inf	3	Vertical	16	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.3676G	71.59	74.00	-2.41	3	Vertical	16	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.4684G	61.82	68.20	-6.38	3	Vertical	16	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.1264G	45.54	54.00	-8.46	3	Horizontal	36	1.24
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.1768G	86.15	Inf	-Inf	3	Horizontal	36	1.24
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.3676G	44.19	54.00	-9.81	3	Horizontal	36	1.24
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.112G	62.98	74.00	-11.02	3	Horizontal	36	1.24
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.1744G	97.89	Inf	-Inf	3	Horizontal	36	1.24
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.3676G	59.26	74.00	-14.74	3	Horizontal	36	1.24
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.4624G	55.65	68.20	-12.55	3	Horizontal	36	1.24
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	10.56976G	50.78	68.20	-17.42	3	Vertical	46	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	10.5608G	50.78	68.20	-17.42	3	Horizontal	298	2.72
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-
5570MHz_TX	Pass	AV	5.378G	53.52	54.00	-0.48	3	Vertical	11	1.50
5570MHz_TX	Pass	AV	5.5244G	96.70	Inf	-Inf	3	Vertical	11	1.50
5570MHz_TX	Pass	PK	5.342G	63.52	68.20	-4.68	3	Vertical	11	1.50
5570MHz_TX	Pass	PK	5.3816G	68.81	74.00	-5.19	3	Vertical	11	1.50
5570MHz_TX	Pass	PK	5.4668G	64.94	68.20	-3.26	3	Vertical	11	1.50
5570MHz_TX	Pass	PK	5.504G	108.17	Inf	-Inf	3	Vertical	11	1.50
5570MHz_TX	Pass	PK	5.7596G	63.78	68.20	-4.42	3	Vertical	11	1.50
5570MHz_TX	Pass	AV	5.3948G	47.15	54.00	-6.85	3	Horizontal	30	1.50



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5570MHz_TX	Pass	AV	5.5004G	83.17	Inf	-Inf	3	Horizontal	30	1.50
5570MHz_TX	Pass	PK	5.288G	57.52	68.20	-10.68	3	Horizontal	30	1.50
5570MHz_TX	Pass	PK	5.378G	60.67	74.00	-13.33	3	Horizontal	30	1.50
5570MHz_TX	Pass	PK	5.468G	56.37	68.20	-11.83	3	Horizontal	30	1.50
5570MHz_TX	Pass	PK	5.5052G	94.17	Inf	-Inf	3	Horizontal	30	1.50
5570MHz_TX	Pass	PK	5.7644G	58.20	68.20	-10.00	3	Horizontal	30	1.50
5570MHz_TX	Pass	AV	11.12208G	39.17	54.00	-14.83	3	Vertical	333	1.58
5570MHz_TX	Pass	PK	11.20112G	51.15	74.00	-22.85	3	Vertical	333	1.58
5570MHz_TX	Pass	AV	11.124G	39.25	54.00	-14.75	3	Horizontal	346	1.50
5570MHz_TX	Pass	PK	11.14768G	51.53	74.00	-22.47	3	Horizontal	346	1.50

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX


5210MHz_TX

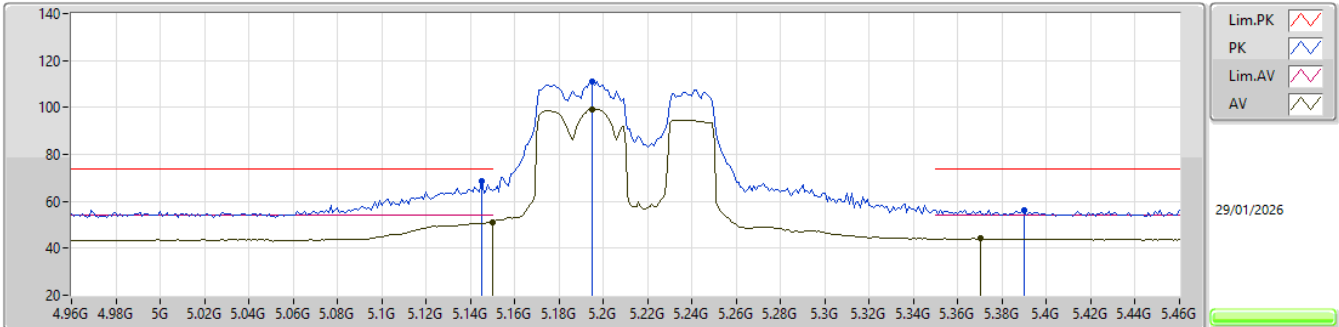

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.15G	51.29	54.00	-2.71	2.54	3	Vertical	18	1.50	48.75	33.40	6.67	37.53
AV	5.195G	99.35	Inf	-Inf	2.67	3	Vertical	18	1.50	96.68	33.49	6.71	37.53
AV	5.37G	44.17	54.00	-9.83	2.31	3	Vertical	18	1.50	41.86	33.14	6.70	37.53
PK	5.145G	68.76	74.00	-5.24	2.51	3	Vertical	18	1.50	66.25	33.38	6.66	37.53
PK	5.195G	111.11	Inf	-Inf	2.67	3	Vertical	18	1.50	108.44	33.49	6.71	37.53
PK	5.39G	56.34	74.00	-17.66	2.34	3	Vertical	18	1.50	54.00	33.18	6.70	37.54

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX


5210MHz_TX

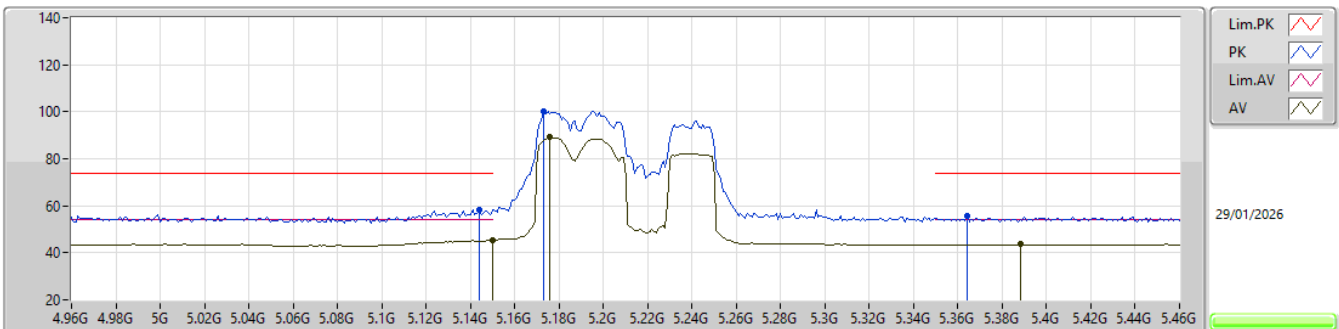

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.15G	45.37	54.00	-8.63	2.54	3	Horizontal	32	1.35	42.83	33.40	6.67	37.53
AV	5.176G	89.09	Inf	-Inf	2.61	3	Horizontal	32	1.35	86.48	33.45	6.69	37.53
AV	5.388G	43.55	54.00	-10.45	2.34	3	Horizontal	32	1.35	41.21	33.18	6.70	37.54
PK	5.144G	58.42	74.00	-15.58	2.51	3	Horizontal	32	1.35	55.91	33.38	6.66	37.53
PK	5.173G	100.25	Inf	-Inf	2.61	3	Horizontal	32	1.35	97.64	33.45	6.69	37.53
PK	5.364G	55.63	74.00	-18.37	2.30	3	Horizontal	32	1.35	53.33	33.13	6.70	37.53


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5210MHz_TX

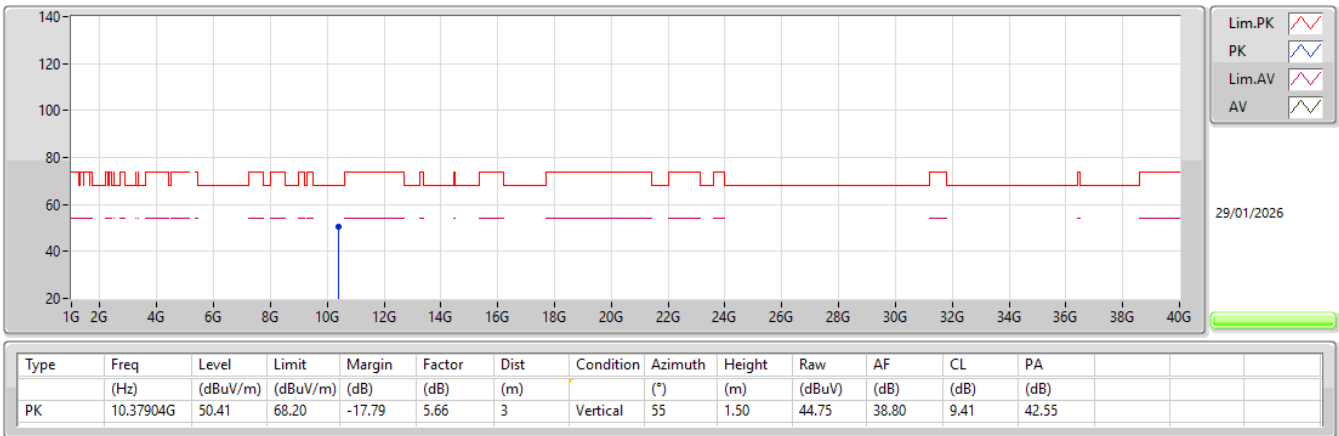


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5210MHz_TX

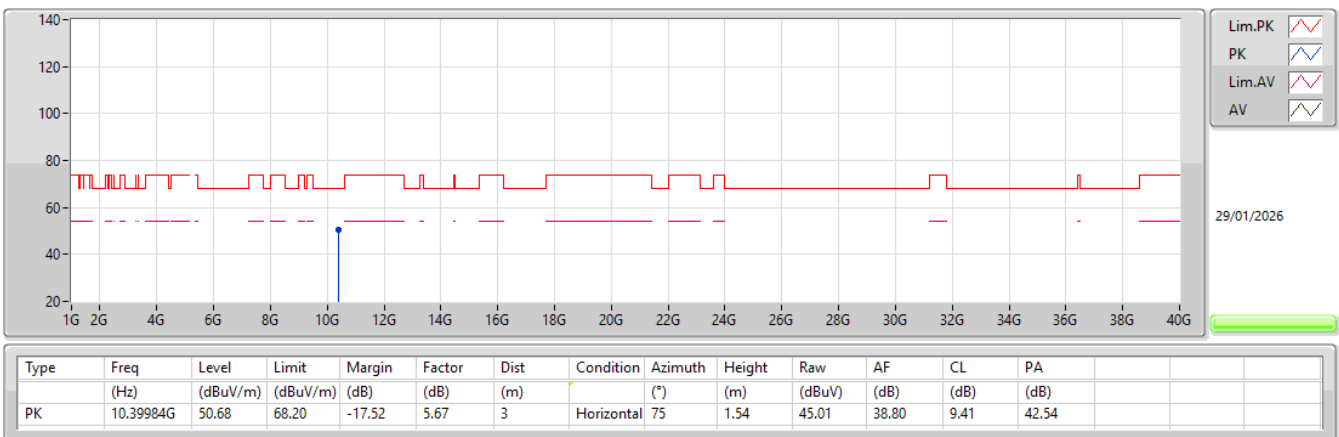

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX


5290MHz_TX

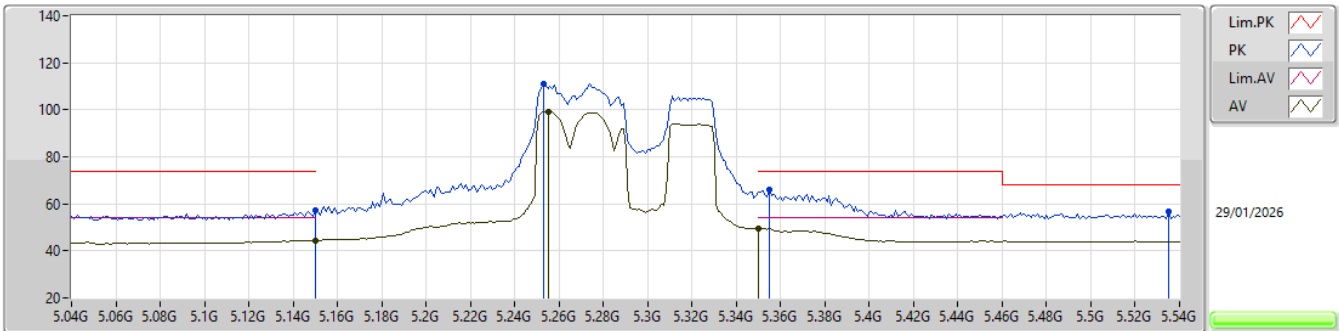

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	44.37	54.00	-9.63	2.54	3	Vertical	356	1.50	41.83	33.40	6.67	37.53
AV	5.255G	99.30	Inf	-Inf	2.46	3	Vertical	356	1.50	96.84	33.28	6.71	37.53
AV	5.35G	49.46	54.00	-4.54	2.27	3	Vertical	356	1.50	47.19	33.10	6.70	37.53
PK	5.15G	57.26	74.00	-16.74	2.54	3	Vertical	356	1.50	54.72	33.40	6.67	37.53
PK	5.253G	110.95	Inf	-Inf	2.47	3	Vertical	356	1.50	108.48	33.29	6.71	37.53
PK	5.355G	65.82	74.00	-8.18	2.28	3	Vertical	356	1.50	63.54	33.11	6.70	37.53
PK	5.355G	56.89	68.20	-11.31	2.68	3	Vertical	356	1.50	54.21	33.37	6.84	37.53

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX


5290MHz_TX

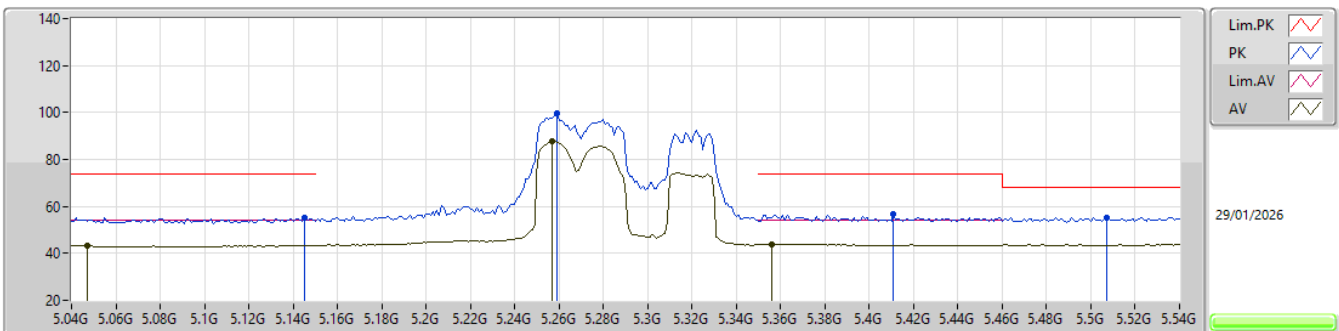

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.047G	43.47	54.00	-10.53	2.56	3	Horizontal	32	1.33	40.91	33.51	6.57	37.52
AV	5.257G	87.55	Inf	-Inf	2.45	3	Horizontal	32	1.33	85.10	33.27	6.71	37.53
AV	5.356G	43.98	54.00	-10.02	2.28	3	Horizontal	32	1.33	41.70	33.11	6.70	37.53
PK	5.145G	55.41	74.00	-18.59	2.51	3	Horizontal	32	1.33	52.90	33.38	6.66	37.53
PK	5.259G	99.89	Inf	-Inf	2.44	3	Horizontal	32	1.33	97.45	33.26	6.71	37.53
PK	5.411G	56.75	74.00	-17.25	2.37	3	Horizontal	32	1.33	54.38	33.20	6.71	37.54
PK	5.507G	55.36	68.20	-12.84	2.58	3	Horizontal	32	1.33	52.78	33.31	6.81	37.54


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5290MHz_TX

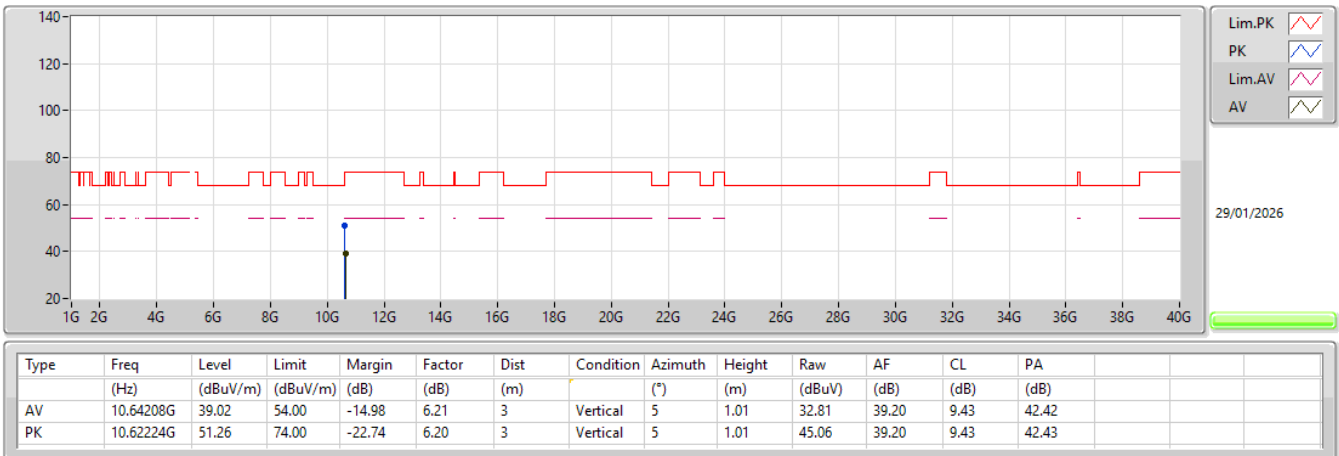


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5290MHz_TX

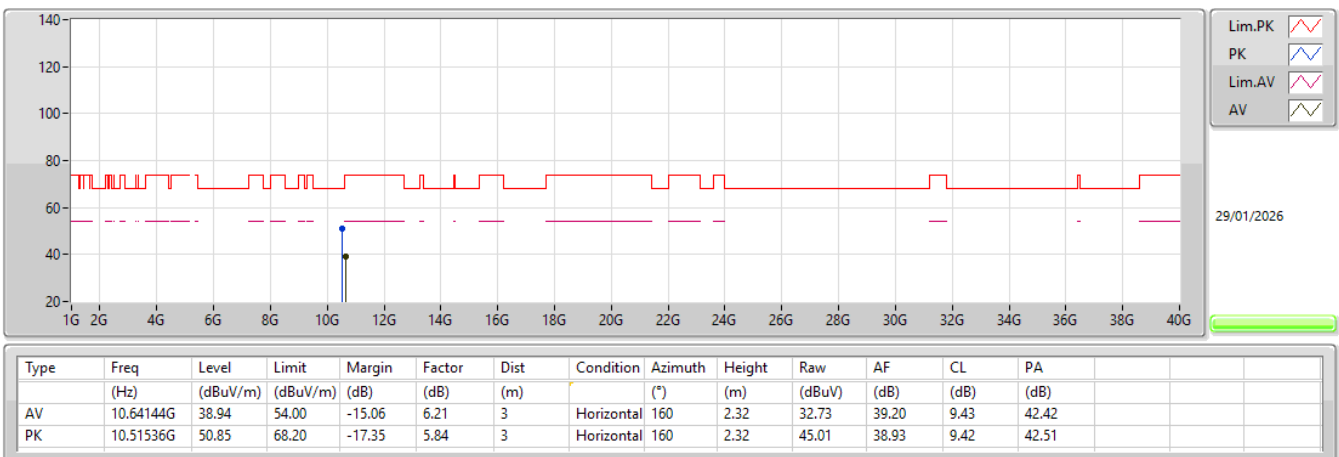


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

5250MHz Straddle 5.25-5.35GHz_TX

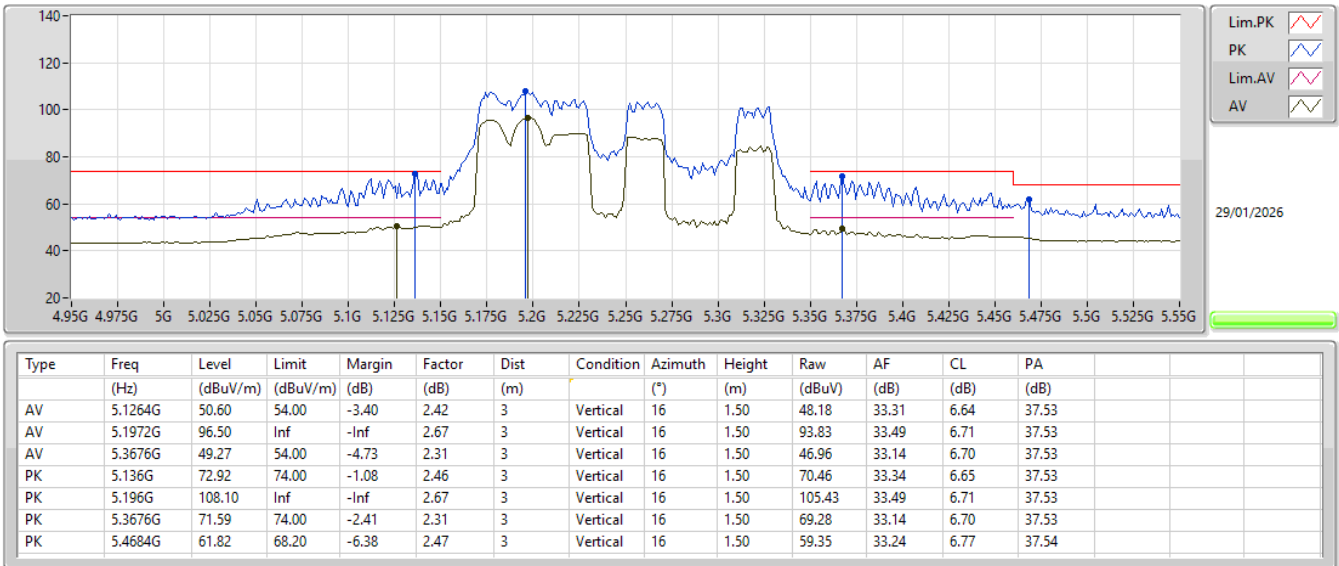


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

5250MHz Straddle 5.25-5.35GHz_TX

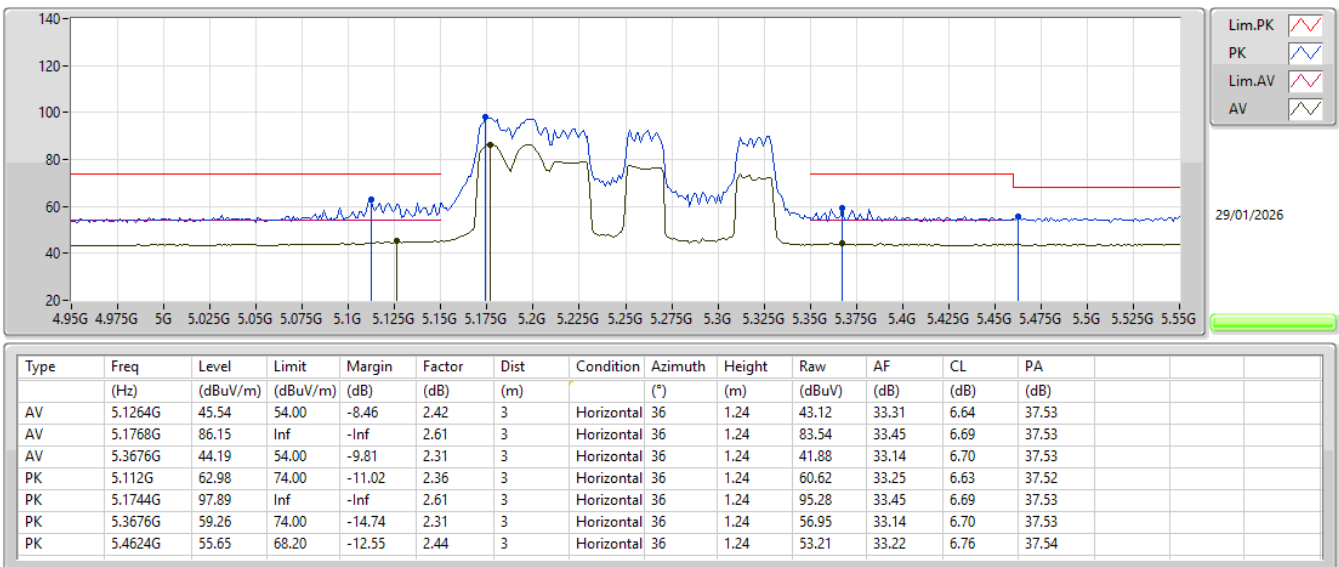


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

5250MHz Straddle 5.25-5.35GHz_TX

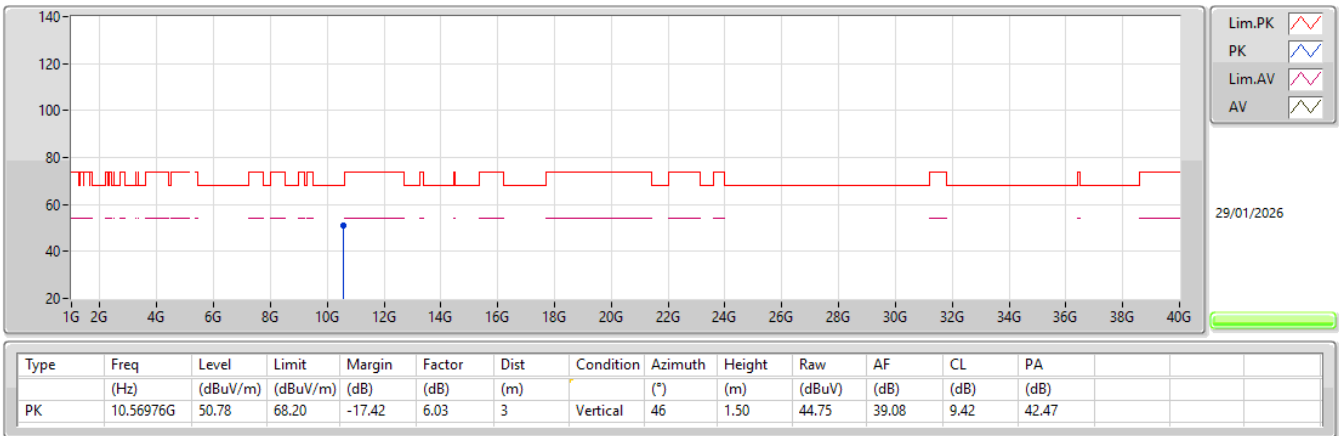


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

5250MHz Straddle 5.25-5.35GHz_TX

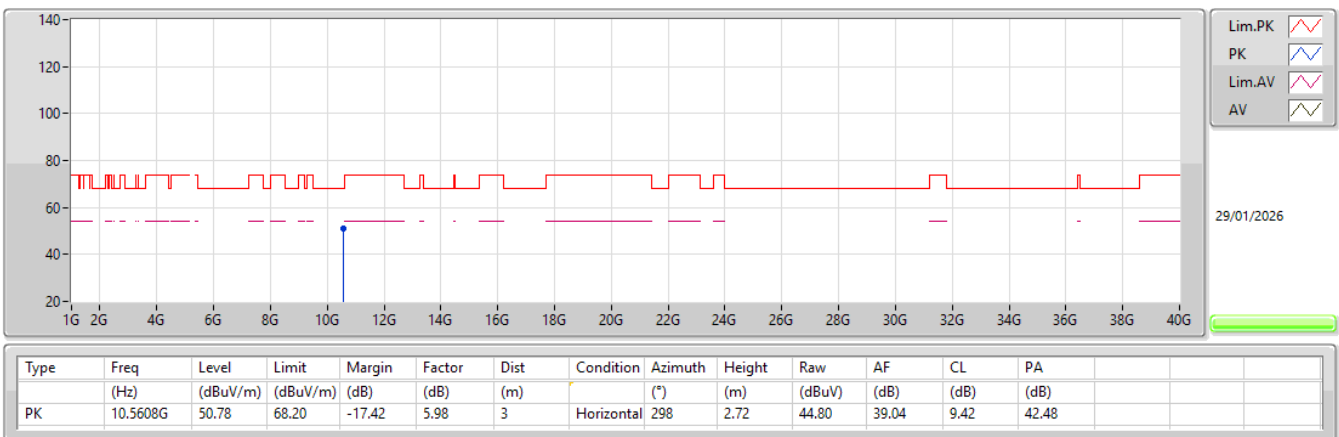

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX


5530MHz_TX

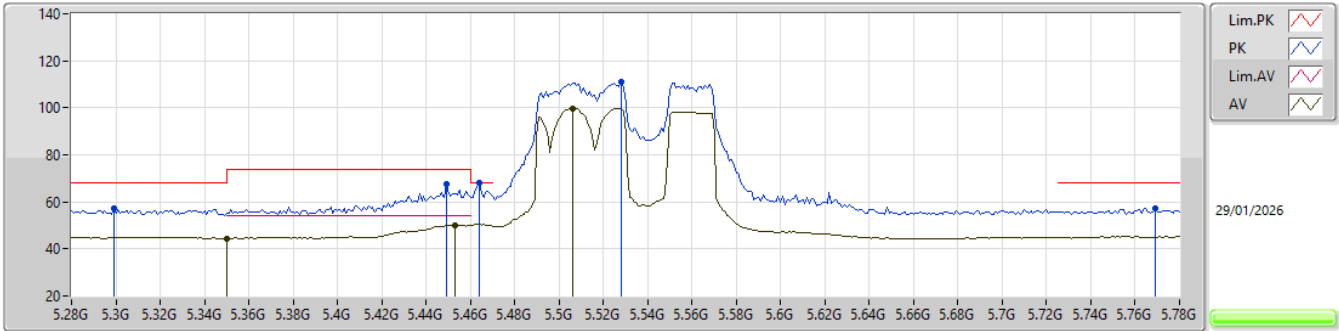

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	44.50	54.00	-9.50	2.27	3	Vertical	9	1.50	42.23	33.10	6.70	37.53
AV	5.453G	50.07	54.00	-3.93	2.42	3	Vertical	9	1.50	47.65	33.21	6.75	37.54
AV	5.506G	99.80	Inf	-Inf	2.58	3	Vertical	9	1.50	97.22	33.31	6.81	37.54
PK	5.299G	57.11	68.20	-11.09	2.28	3	Vertical	9	1.50	54.83	33.10	6.71	37.53
PK	5.449G	67.42	74.00	-6.58	2.41	3	Vertical	9	1.50	65.01	33.20	6.75	37.54
PK	5.464G	68.08	68.20	-0.12	2.45	3	Vertical	9	1.50	65.63	33.23	6.76	37.54
PK	5.528G	110.78	Inf	-Inf	2.66	3	Vertical	9	1.50	108.12	33.36	6.83	37.53
PK	5.769G	57.11	68.20	-11.09	3.99	3	Vertical	9	1.50	53.12	34.21	7.23	37.45

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX


5530MHz_TX

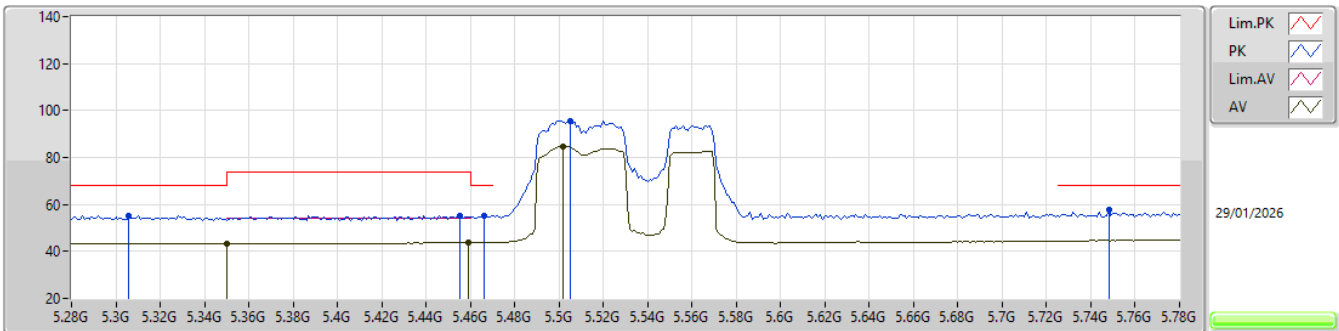

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	43.23	54.00	-10.77	2.27	3	Horizontal	29	1.50	40.96	33.10	6.70	37.53
AV	5.459G	44.01	54.00	-9.99	2.44	3	Horizontal	29	1.50	41.57	33.22	6.76	37.54
AV	5.502G	84.62	Inf	-Inf	2.56	3	Horizontal	29	1.50	82.06	33.30	6.80	37.54
PK	5.306G	55.43	68.20	-12.77	2.27	3	Horizontal	29	1.50	53.16	33.10	6.70	37.53
PK	5.455G	55.30	74.00	-18.70	2.42	3	Horizontal	29	1.50	52.88	33.21	6.75	37.54
PK	5.466G	55.34	68.20	-12.86	2.46	3	Horizontal	29	1.50	52.88	33.23	6.77	37.54
PK	5.505G	95.71	Inf	-Inf	2.57	3	Horizontal	29	1.50	93.14	33.31	6.80	37.54
PK	5.748G	57.63	68.20	-10.57	3.82	3	Horizontal	29	1.50	53.81	34.09	7.19	37.46


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5530MHz_TX

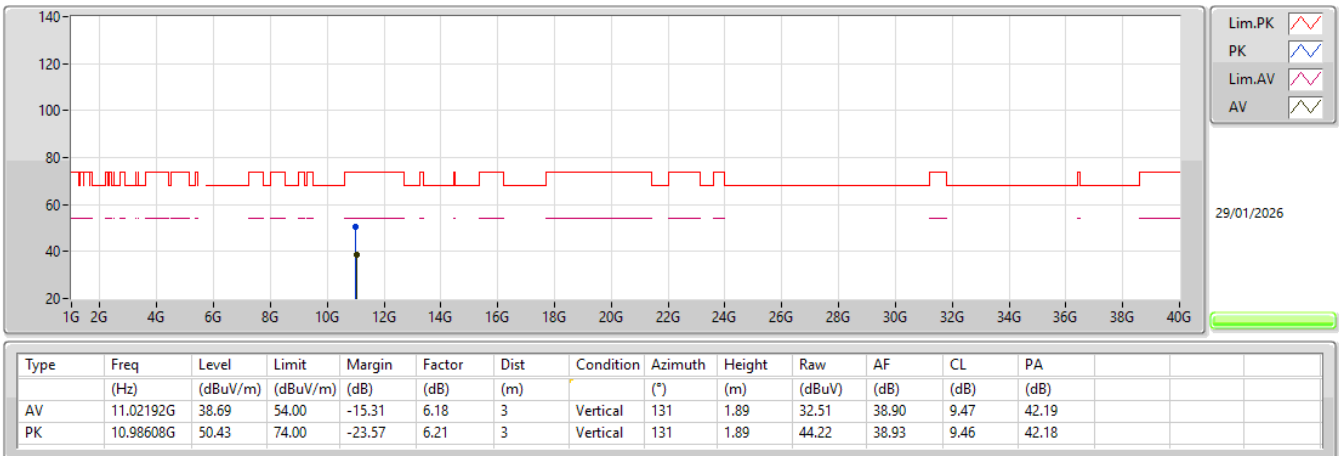


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5530MHz_TX

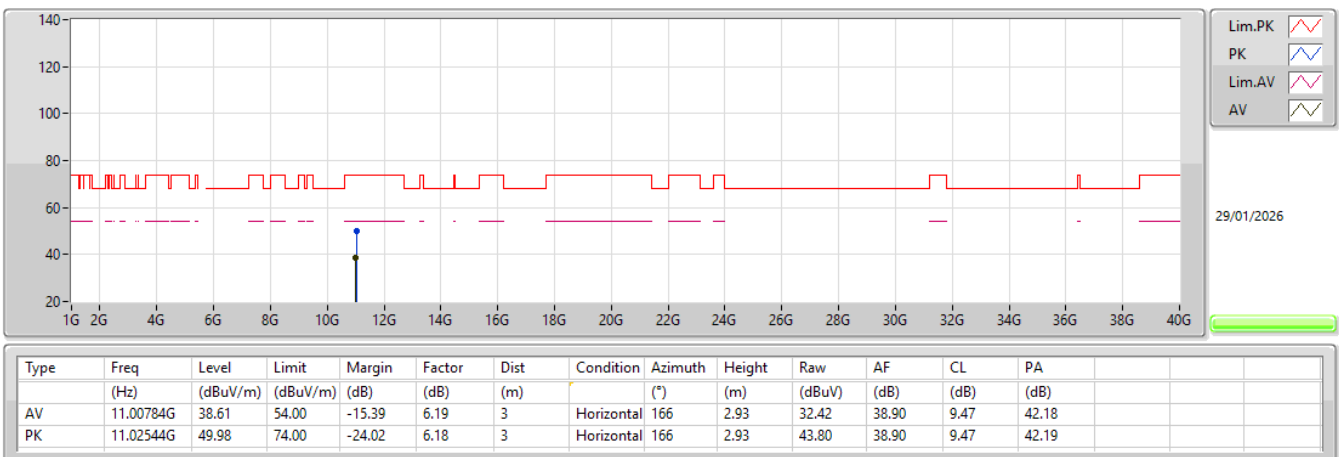


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

5570MHz_TX

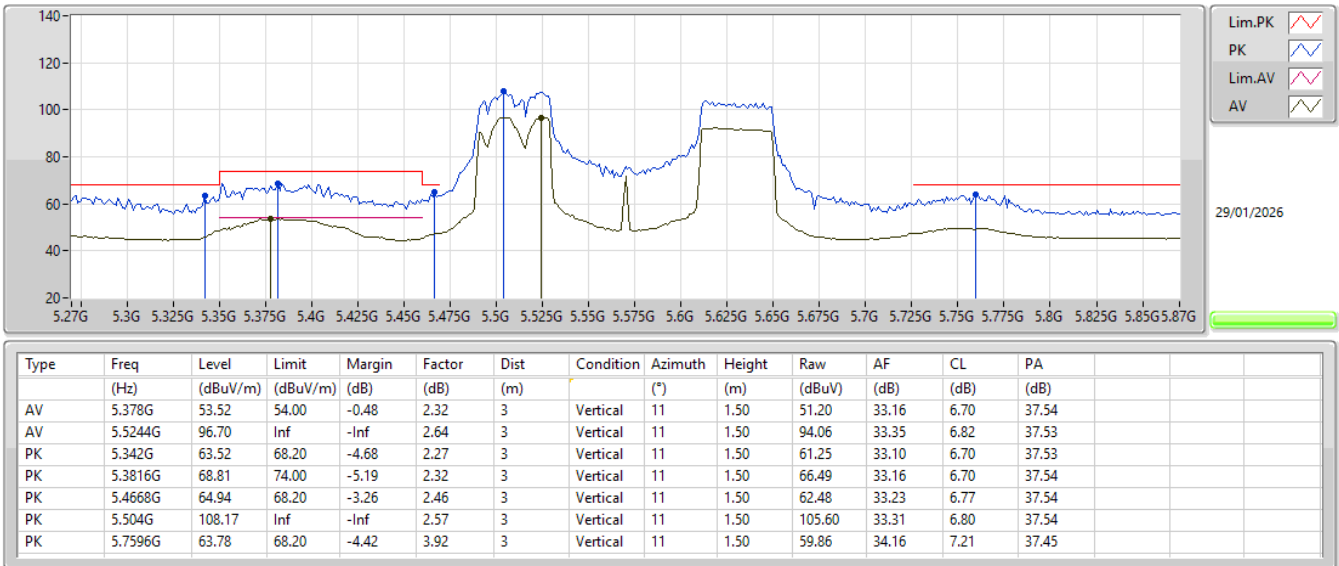


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

5570MHz_TX

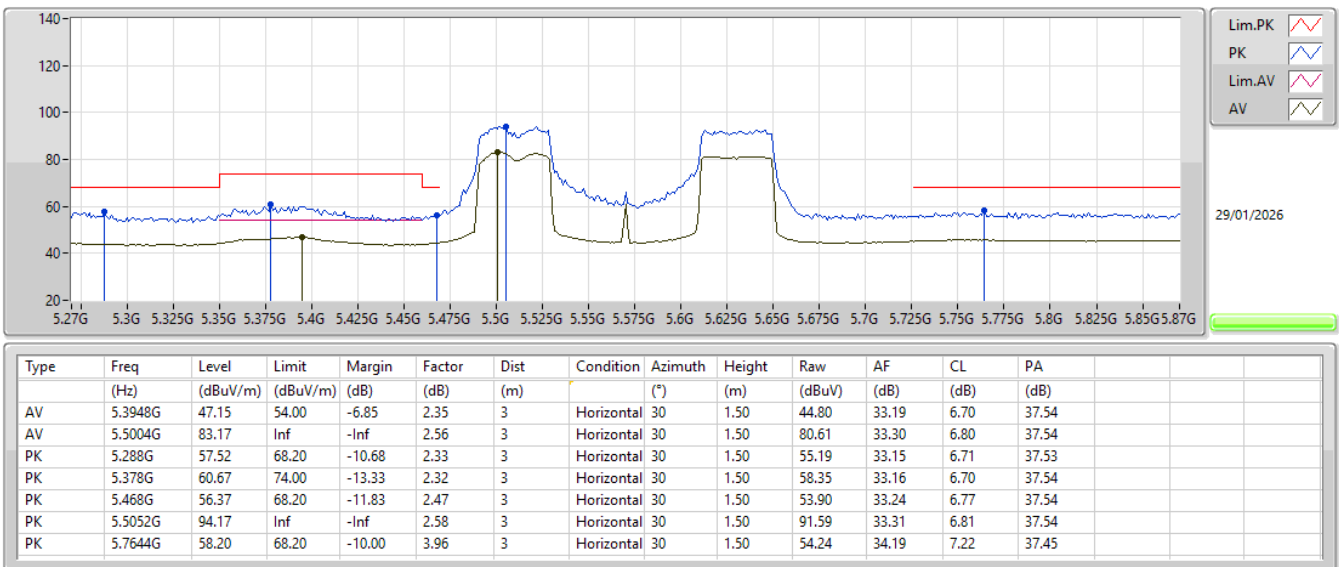


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

5570MHz_TX

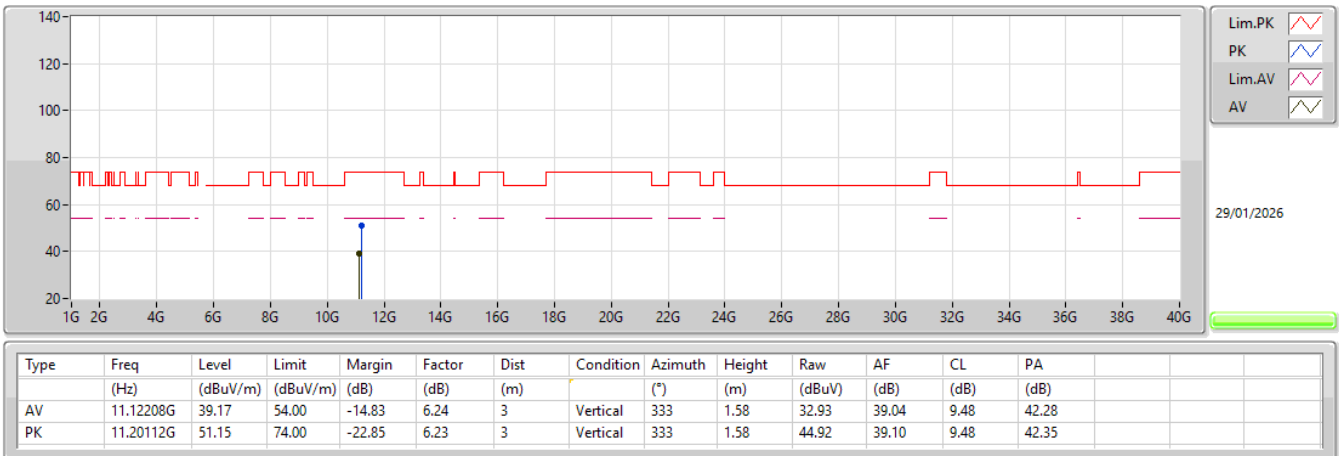


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

5570MHz_TX

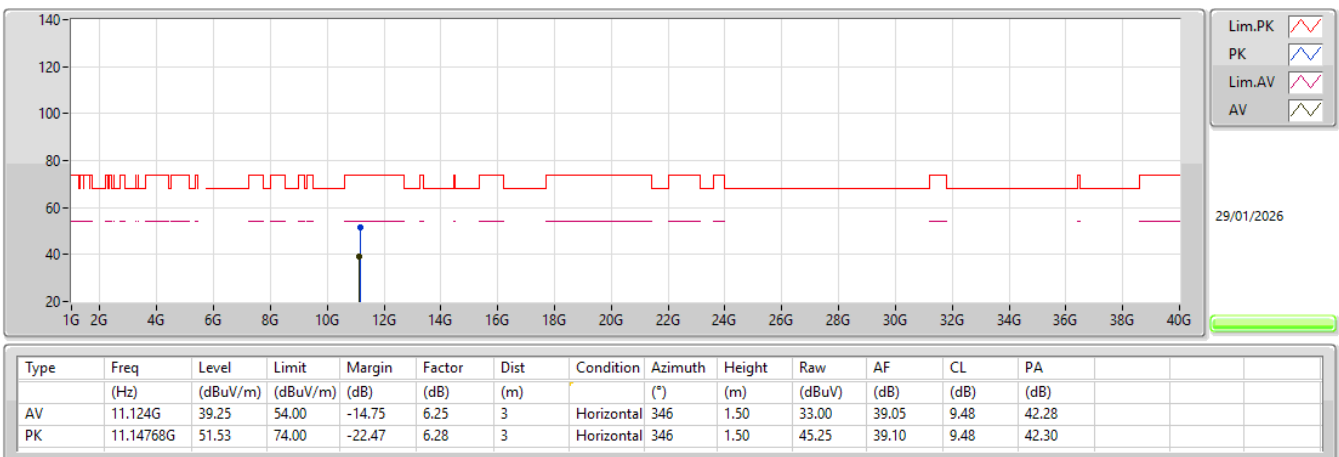


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5775MHz_TX

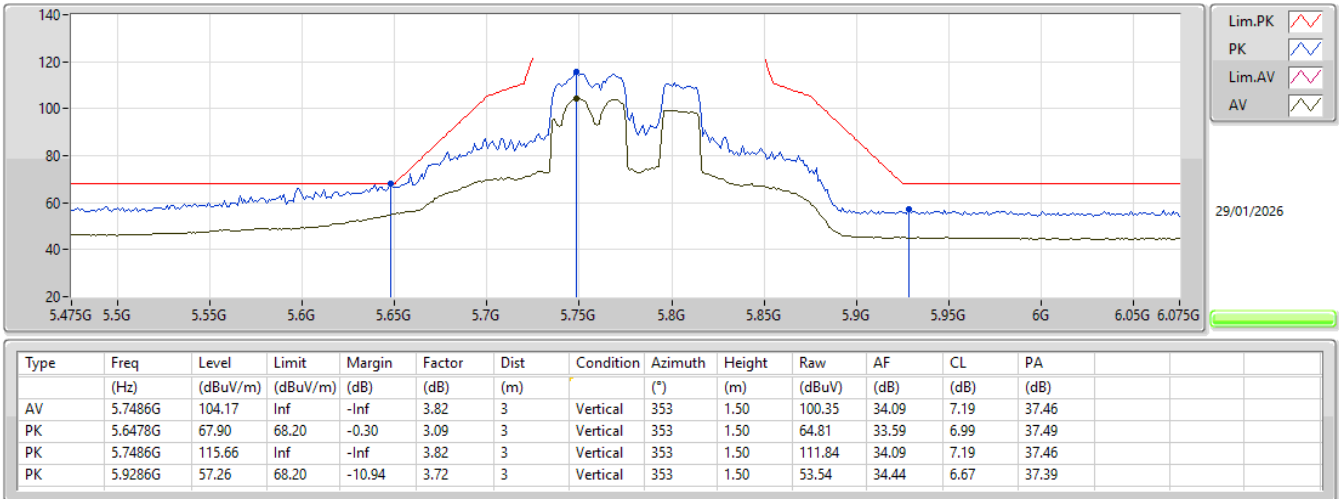


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5775MHz_TX

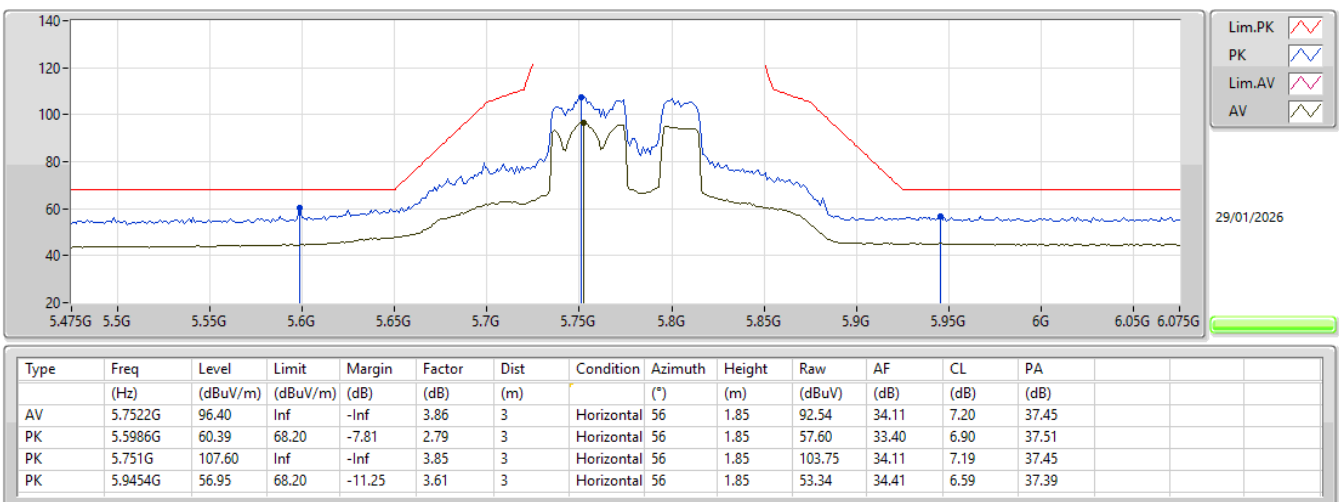


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5775MHz_TX

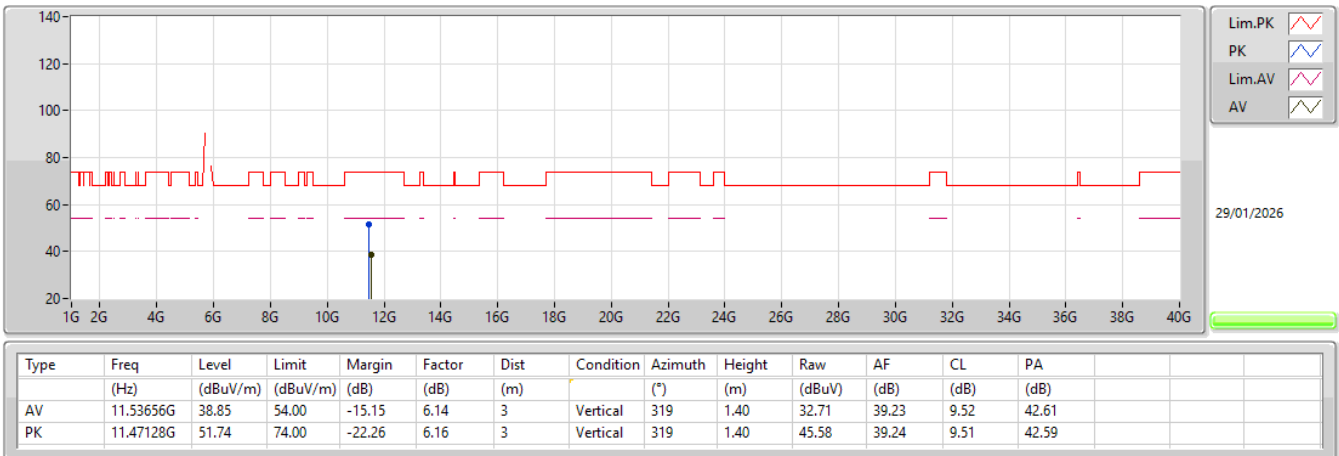

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5775MHz_TX

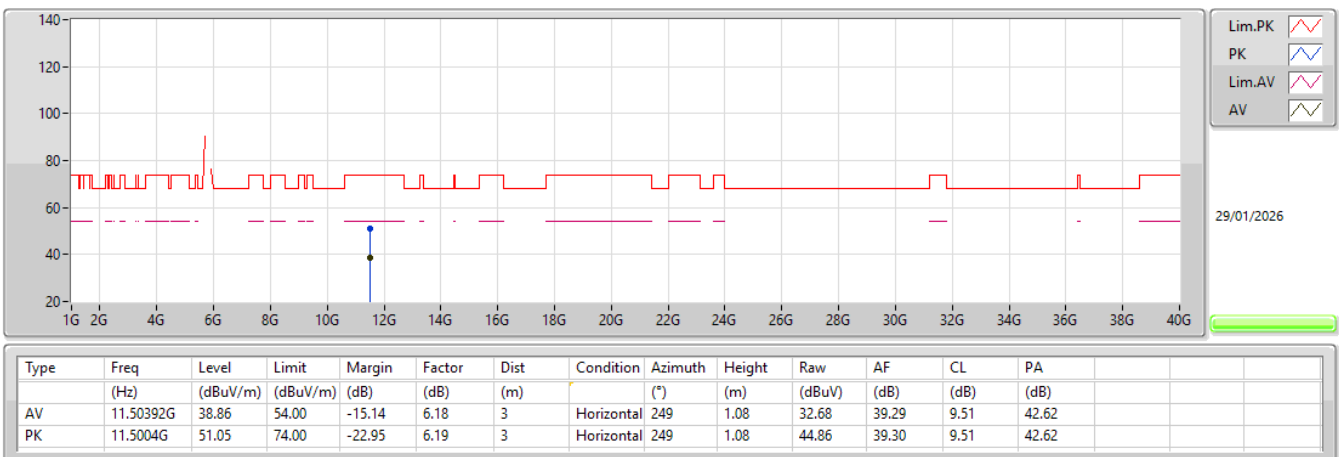

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	Pass	AV	5.149G	52.74	54.00	-1.26	3	Vertical	0	1.50
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	Pass	AV	5.36G	53.00	54.00	-1.00	3	Vertical	2	2.40
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	Pass	PK	5.1456G	73.75	74.00	-0.25	3	Vertical	17	1.50
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	Pass	PK	5.469G	65.73	68.20	-2.47	3	Vertical	345	1.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX	Pass	PK	5.4692G	67.77	68.20	-0.43	3	Vertical	8	1.50
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	Pass	PK	5.6334G	64.15	68.20	-4.05	3	Vertical	10	1.50



Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-	-	-	-	-	-	-	-
5210MHz_TX	Pass	AV	5.149G	52.74	54.00	-1.26	3	Vertical	0	1.50
5210MHz_TX	Pass	AV	5.208G	97.31	Inf	-Inf	3	Vertical	0	1.50
5210MHz_TX	Pass	AV	5.35G	45.77	54.00	-8.23	3	Vertical	0	1.50
5210MHz_TX	Pass	PK	5.15G	70.29	74.00	-3.71	3	Vertical	0	1.50
5210MHz_TX	Pass	PK	5.209G	107.75	Inf	-Inf	3	Vertical	0	1.50
5210MHz_TX	Pass	PK	5.35G	59.59	74.00	-14.41	3	Vertical	0	1.50
5210MHz_TX	Pass	AV	5.137G	46.59	54.00	-7.41	3	Horizontal	33	1.50
5210MHz_TX	Pass	AV	5.176G	85.49	Inf	-Inf	3	Horizontal	33	1.50
5210MHz_TX	Pass	AV	5.454G	45.39	54.00	-8.61	3	Horizontal	33	1.50
5210MHz_TX	Pass	PK	5.139G	60.49	74.00	-13.51	3	Horizontal	33	1.50
5210MHz_TX	Pass	PK	5.195G	96.59	Inf	-Inf	3	Horizontal	33	1.50
5210MHz_TX	Pass	PK	5.364G	57.92	74.00	-16.08	3	Horizontal	33	1.50
5210MHz_TX	Pass	PK	10.40528G	50.89	68.20	-17.31	3	Vertical	329	2.69
5210MHz_TX	Pass	PK	10.38768G	50.66	68.20	-17.54	3	Horizontal	74	1.50
5290MHz_TX	Pass	AV	5.136G	46.38	54.00	-7.62	3	Vertical	2	2.40
5290MHz_TX	Pass	AV	5.283G	100.45	Inf	-Inf	3	Vertical	2	2.40
5290MHz_TX	Pass	AV	5.36G	53.00	54.00	-1.00	3	Vertical	2	2.40
5290MHz_TX	Pass	PK	5.137G	61.90	74.00	-12.10	3	Vertical	2	2.40
5290MHz_TX	Pass	PK	5.284G	111.42	Inf	-Inf	3	Vertical	2	2.40
5290MHz_TX	Pass	PK	5.363G	72.41	74.00	-1.59	3	Vertical	2	2.40
5290MHz_TX	Pass	PK	5.467G	60.07	68.20	-8.13	3	Vertical	2	2.40
5290MHz_TX	Pass	AV	5.15G	44.93	54.00	-9.07	3	Horizontal	33	1.25
5290MHz_TX	Pass	AV	5.258G	87.59	Inf	-Inf	3	Horizontal	33	1.25
5290MHz_TX	Pass	AV	5.359G	45.89	54.00	-8.11	3	Horizontal	33	1.25
5290MHz_TX	Pass	PK	5.135G	57.10	74.00	-16.90	3	Horizontal	33	1.25
5290MHz_TX	Pass	PK	5.259G	99.33	Inf	-Inf	3	Horizontal	33	1.25
5290MHz_TX	Pass	PK	5.383G	58.86	74.00	-15.14	3	Horizontal	33	1.25
5290MHz_TX	Pass	PK	5.503G	58.39	68.20	-9.81	3	Horizontal	33	1.25
5290MHz_TX	Pass	AV	10.61808G	38.49	54.00	-15.51	3	Vertical	164	1.50
5290MHz_TX	Pass	PK	10.62G	50.56	74.00	-23.44	3	Vertical	164	1.50
5290MHz_TX	Pass	AV	10.61824G	38.47	54.00	-15.53	3	Horizontal	186	1.01
5290MHz_TX	Pass	PK	10.5568G	50.67	68.20	-17.53	3	Horizontal	186	1.01
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-	-	-
5530MHz_TX	Pass	AV	5.35G	44.65	54.00	-9.35	3	Vertical	345	1.00
5530MHz_TX	Pass	AV	5.446G	46.95	54.00	-7.05	3	Vertical	345	1.00
5530MHz_TX	Pass	AV	5.532G	91.14	Inf	-Inf	3	Vertical	345	1.00
5530MHz_TX	Pass	PK	5.306G	57.07	68.20	-11.13	3	Vertical	345	1.00
5530MHz_TX	Pass	PK	5.448G	63.81	74.00	-10.19	3	Vertical	345	1.00
5530MHz_TX	Pass	PK	5.469G	65.73	68.20	-2.47	3	Vertical	345	1.00
5530MHz_TX	Pass	PK	5.533G	101.68	Inf	-Inf	3	Vertical	345	1.00
5530MHz_TX	Pass	PK	5.75G	58.87	68.20	-9.33	3	Vertical	345	1.00
5530MHz_TX	Pass	AV	5.35G	44.41	54.00	-9.59	3	Horizontal	11	2.35
5530MHz_TX	Pass	AV	5.46G	44.88	54.00	-9.12	3	Horizontal	11	2.35
5530MHz_TX	Pass	AV	5.503G	77.92	Inf	-Inf	3	Horizontal	11	2.35
5530MHz_TX	Pass	PK	5.288G	56.46	68.20	-11.74	3	Horizontal	11	2.35
5530MHz_TX	Pass	PK	5.435G	57.22	74.00	-16.78	3	Horizontal	11	2.35
5530MHz_TX	Pass	PK	5.467G	56.70	68.20	-11.50	3	Horizontal	11	2.35
5530MHz_TX	Pass	PK	5.543G	89.52	Inf	-Inf	3	Horizontal	11	2.35
5530MHz_TX	Pass	PK	5.762G	58.29	68.20	-9.91	3	Horizontal	11	2.35
5530MHz_TX	Pass	AV	11.03184G	37.95	54.00	-16.05	3	Vertical	160	1.50
5530MHz_TX	Pass	PK	11.0416G	50.46	74.00	-23.54	3	Vertical	160	1.50
5530MHz_TX	Pass	AV	11.03264G	37.94	54.00	-16.06	3	Horizontal	44	2.70
5530MHz_TX	Pass	PK	11.07744G	50.17	74.00	-23.83	3	Horizontal	44	2.70
5610MHz_TX	Pass	AV	5.45G	47.41	54.00	-6.59	3	Vertical	343	1.50
5610MHz_TX	Pass	AV	5.612G	101.84	Inf	-Inf	3	Vertical	343	1.50
5610MHz_TX	Pass	PK	5.407G	66.94	74.00	-7.06	3	Vertical	343	1.50
5610MHz_TX	Pass	PK	5.468G	63.42	68.20	-4.78	3	Vertical	343	1.50
5610MHz_TX	Pass	PK	5.612G	113.21	Inf	-Inf	3	Vertical	343	1.50
5610MHz_TX	Pass	PK	5.734G	61.68	68.20	-6.52	3	Vertical	343	1.50
5610MHz_TX	Pass	AV	5.46G	44.96	54.00	-9.04	3	Horizontal	12	2.35

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5610MHz_TX	Pass	AV	5.584G	91.57	Inf	-Inf	3	Horizontal	12	2.35
5610MHz_TX	Pass	PK	5.455G	57.21	74.00	-16.79	3	Horizontal	12	2.35
5610MHz_TX	Pass	PK	5.469G	58.16	68.20	-10.04	3	Horizontal	12	2.35
5610MHz_TX	Pass	PK	5.583G	103.45	Inf	-Inf	3	Horizontal	12	2.35
5610MHz_TX	Pass	PK	5.83G	59.11	68.20	-9.09	3	Horizontal	12	2.35
5610MHz_TX	Pass	AV	11.24544G	38.18	54.00	-15.82	3	Vertical	220	1.28
5610MHz_TX	Pass	PK	11.2208G	51.26	74.00	-22.74	3	Vertical	220	1.28
5610MHz_TX	Pass	AV	11.24432G	38.31	54.00	-15.69	3	Horizontal	300	1.48
5610MHz_TX	Pass	PK	11.23104G	51.13	74.00	-22.87	3	Horizontal	300	1.48
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX										
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4596G	45.68	54.00	-8.32	3	Vertical	318	1.50
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.6876G	102.63	Inf	-Inf	3	Vertical	318	1.50
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4392G	58.46	74.00	-15.54	3	Vertical	318	1.50
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.468G	59.98	68.20	-8.22	3	Vertical	318	1.50
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.6852G	113.79	Inf	-Inf	3	Vertical	318	1.50
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.8556G	59.19	68.20	-9.01	3	Vertical	318	1.50
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.414G	44.68	54.00	-9.32	3	Horizontal	54	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.684G	93.48	Inf	-Inf	3	Horizontal	54	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.3972G	57.73	74.00	-16.27	3	Horizontal	54	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.462G	56.48	68.20	-11.72	3	Horizontal	54	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.6828G	104.71	Inf	-Inf	3	Horizontal	54	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.8844G	59.21	68.20	-8.99	3	Horizontal	54	2.09
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.40896G	38.74	54.00	-15.26	3	Vertical	203	1.50
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.35728G	51.33	74.00	-22.67	3	Vertical	203	1.50
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.40912G	38.80	54.00	-15.20	3	Horizontal	95	2.03
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.40672G	51.09	74.00	-22.91	3	Horizontal	95	2.03
5775MHz_TX	Pass	AV	5.7738G	102.67	Inf	-Inf	3	Vertical	10	1.50
5775MHz_TX	Pass	PK	5.6334G	64.15	68.20	-4.05	3	Vertical	10	1.50
5775MHz_TX	Pass	PK	5.7726G	113.51	Inf	-Inf	3	Vertical	10	1.50
5775MHz_TX	Pass	PK	6.0654G	58.82	68.20	-9.38	3	Vertical	10	1.50
5775MHz_TX	Pass	AV	5.7726G	94.38	Inf	-Inf	3	Horizontal	55	2.09
5775MHz_TX	Pass	PK	5.6502G	58.55	68.35	-9.80	3	Horizontal	55	2.09
5775MHz_TX	Pass	PK	5.7714G	105.19	Inf	-Inf	3	Horizontal	55	2.09
5775MHz_TX	Pass	PK	5.9994G	58.76	68.20	-9.44	3	Horizontal	55	2.09
5775MHz_TX	Pass	AV	11.54248G	38.34	54.00	-15.66	3	Vertical	239	1.80
5775MHz_TX	Pass	PK	11.526G	50.85	74.00	-23.15	3	Vertical	239	1.80
5775MHz_TX	Pass	AV	11.53976G	38.39	54.00	-15.61	3	Horizontal	19	1.50
5775MHz_TX	Pass	PK	11.53304G	50.49	74.00	-23.51	3	Horizontal	19	1.50
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX										
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.15G	52.17	54.00	-1.83	3	Vertical	360	1.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.2548G	94.36	Inf	-Inf	3	Vertical	360	1.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.3568G	49.19	54.00	-4.81	3	Vertical	360	1.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.1456G	72.39	74.00	-1.61	3	Vertical	360	1.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.2548G	106.00	Inf	-Inf	3	Vertical	360	1.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.3664G	72.72	74.00	-1.28	3	Vertical	360	1.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.5488G	58.90	68.20	-9.30	3	Vertical	360	1.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.136G	45.67	54.00	-8.33	3	Horizontal	32	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.238G	80.21	Inf	-Inf	3	Horizontal	32	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.4048G	45.35	54.00	-8.65	3	Horizontal	32	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.1276G	61.47	74.00	-12.53	3	Horizontal	32	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.178G	91.91	Inf	-Inf	3	Horizontal	32	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.4096G	57.92	74.00	-16.08	3	Horizontal	32	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.4972G	57.74	68.20	-10.46	3	Horizontal	32	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	10.4704G	50.65	68.20	-17.55	3	Vertical	103	2.85
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	10.47184G	50.84	68.20	-17.36	3	Horizontal	64	2.19
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX										
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.136G	50.36	54.00	-3.64	3	Vertical	17	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.2368G	94.10	Inf	-Inf	3	Vertical	17	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.3568G	47.32	54.00	-6.68	3	Vertical	17	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.1456G	73.75	74.00	-0.25	3	Vertical	17	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.2356G	105.26	Inf	-Inf	3	Vertical	17	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.4072G	65.17	74.00	-8.83	3	Vertical	17	1.50




RSE TX above 1GHz_Non-Beamforming_O-405_Puncturing

Appendix D.3

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.4684G	59.62	68.20	-8.58	3	Vertical	17	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.1348G	45.55	54.00	-8.45	3	Horizontal	31	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.238G	81.85	Inf	-Inf	3	Horizontal	31	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.4192G	45.43	54.00	-8.57	3	Horizontal	31	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.1468G	62.26	74.00	-11.74	3	Horizontal	31	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.238G	93.30	Inf	-Inf	3	Horizontal	31	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.4144G	57.68	74.00	-16.32	3	Horizontal	31	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.5332G	57.40	68.20	-10.80	3	Horizontal	31	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	10.4504G	49.94	68.20	-18.26	3	Vertical	4	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	10.48272G	50.04	68.20	-18.16	3	Horizontal	295	1.01
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_2TX	-	-	-	-	-	-	-	-	-	-
5570MHz_TX	Pass	AV	5.4476G	48.27	54.00	-5.73	3	Vertical	353	1.00
5570MHz_TX	Pass	AV	5.5652G	89.20	Inf	-Inf	3	Vertical	353	1.00
5570MHz_TX	Pass	PK	5.3156G	58.94	68.20	-9.26	3	Vertical	353	1.00
5570MHz_TX	Pass	PK	5.4476G	67.66	74.00	-6.34	3	Vertical	353	1.00
5570MHz_TX	Pass	PK	5.468G	67.22	68.20	-0.98	3	Vertical	353	1.00
5570MHz_TX	Pass	PK	5.5436G	100.46	Inf	-Inf	3	Vertical	353	1.00
5570MHz_TX	Pass	PK	5.7284G	60.40	68.20	-7.80	3	Vertical	353	1.00
5570MHz_TX	Pass	AV	5.4572G	44.66	54.00	-9.34	3	Horizontal	12	2.26
5570MHz_TX	Pass	AV	5.5652G	76.18	Inf	-Inf	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.312G	56.95	68.20	-11.25	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.4476G	57.50	74.00	-16.50	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.4668G	56.59	68.20	-11.61	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.5652G	87.83	Inf	-Inf	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.8304G	59.14	68.20	-9.06	3	Horizontal	12	2.26
5570MHz_TX	Pass	AV	11.11056G	38.60	54.00	-15.40	3	Vertical	11	1.50
5570MHz_TX	Pass	PK	11.20016G	50.95	74.00	-23.05	3	Vertical	11	1.50
5570MHz_TX	Pass	AV	11.11408G	38.69	54.00	-15.31	3	Horizontal	299	1.01
5570MHz_TX	Pass	PK	11.1496G	50.31	74.00	-23.69	3	Horizontal	299	1.01
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX	-	-	-	-	-	-	-	-	-	-
5570MHz_TX	Pass	AV	5.4476G	46.67	54.00	-7.33	3	Vertical	8	1.50
5570MHz_TX	Pass	AV	5.5676G	92.22	Inf	-Inf	3	Vertical	8	1.50
5570MHz_TX	Pass	PK	5.3372G	60.51	68.20	-7.69	3	Vertical	8	1.50
5570MHz_TX	Pass	PK	5.45G	64.60	74.00	-9.40	3	Vertical	8	1.50
5570MHz_TX	Pass	PK	5.4692G	67.77	68.20	-0.43	3	Vertical	8	1.50
5570MHz_TX	Pass	PK	5.5676G	103.72	Inf	-Inf	3	Vertical	8	1.50
5570MHz_TX	Pass	PK	5.828G	59.38	68.20	-8.82	3	Vertical	8	1.50
5570MHz_TX	Pass	AV	5.4464G	44.79	54.00	-9.21	3	Horizontal	12	2.26
5570MHz_TX	Pass	AV	5.564G	81.20	Inf	-Inf	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.3312G	56.64	68.20	-11.56	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.4104G	57.11	74.00	-16.89	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.4692G	56.27	68.20	-11.93	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.5676G	92.18	Inf	-Inf	3	Horizontal	12	2.26
5570MHz_TX	Pass	PK	5.7824G	59.35	68.20	-8.85	3	Horizontal	12	2.26
5570MHz_TX	Pass	AV	11.11472G	37.92	54.00	-16.08	3	Vertical	179	1.50
5570MHz_TX	Pass	PK	11.09456G	49.98	74.00	-24.02	3	Vertical	179	1.50
5570MHz_TX	Pass	AV	11.16336G	37.93	54.00	-16.07	3	Horizontal	189	2.66
5570MHz_TX	Pass	PK	11.09072G	50.80	74.00	-23.20	3	Horizontal	189	2.66

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX


5210MHz_TX

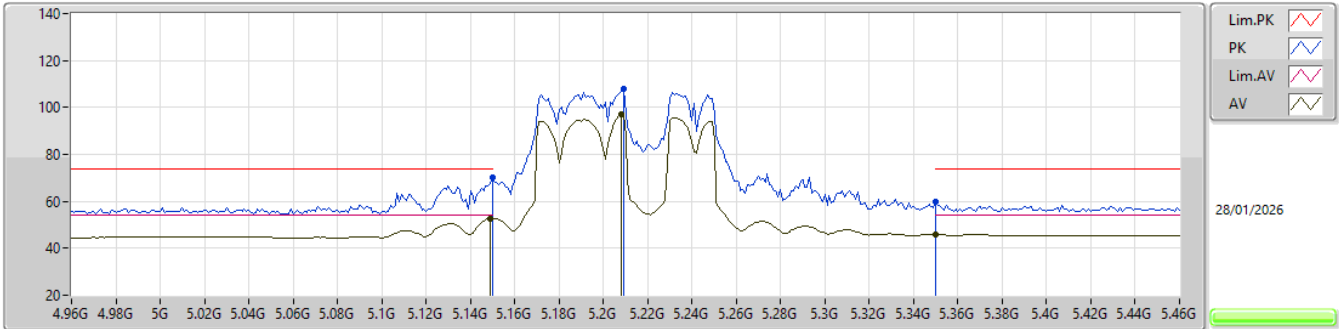

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)			
AV	5.149G	52.74	54.00	-1.26	2.53	3	Vertical	0	1.50	50.21	33.40	6.66	37.53			
AV	5.208G	97.31	Inf	-Inf	2.65	3	Vertical	0	1.50	94.66	33.47	6.71	37.53			
AV	5.35G	45.77	54.00	-8.23	2.27	3	Vertical	0	1.50	43.50	33.10	6.70	37.53			
PK	5.15G	70.29	74.00	-3.71	2.54	3	Vertical	0	1.50	67.75	33.40	6.67	37.53			
PK	5.209G	107.75	Inf	-Inf	2.64	3	Vertical	0	1.50	105.11	33.46	6.71	37.53			
PK	5.35G	59.59	74.00	-14.41	2.27	3	Vertical	0	1.50	57.32	33.10	6.70	37.53			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX


5210MHz_TX

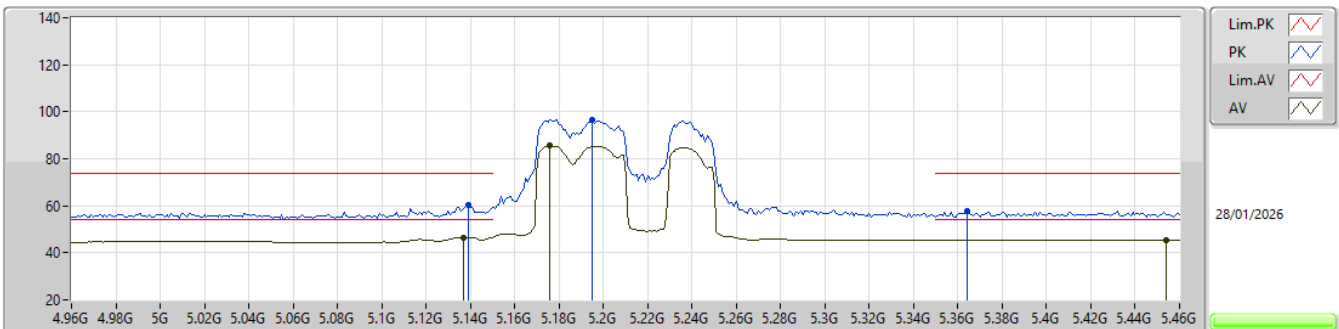

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)			
AV	5.137G	46.59	54.00	-7.41	2.47	3	Horizontal	33	1.50	44.12	33.35	6.65	37.53			
AV	5.176G	85.49	Inf	-Inf	2.61	3	Horizontal	33	1.50	82.88	33.45	6.69	37.53			
AV	5.454G	45.39	54.00	-8.61	2.42	3	Horizontal	33	1.50	42.97	33.21	6.75	37.54			
PK	5.139G	60.49	74.00	-13.51	2.49	3	Horizontal	33	1.50	58.00	33.36	6.66	37.53			
PK	5.195G	96.59	Inf	-Inf	2.67	3	Horizontal	33	1.50	93.92	33.49	6.71	37.53			
PK	5.364G	57.92	74.00	-16.08	2.30	3	Horizontal	33	1.50	55.62	33.13	6.70	37.53			


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5210MHz_TX

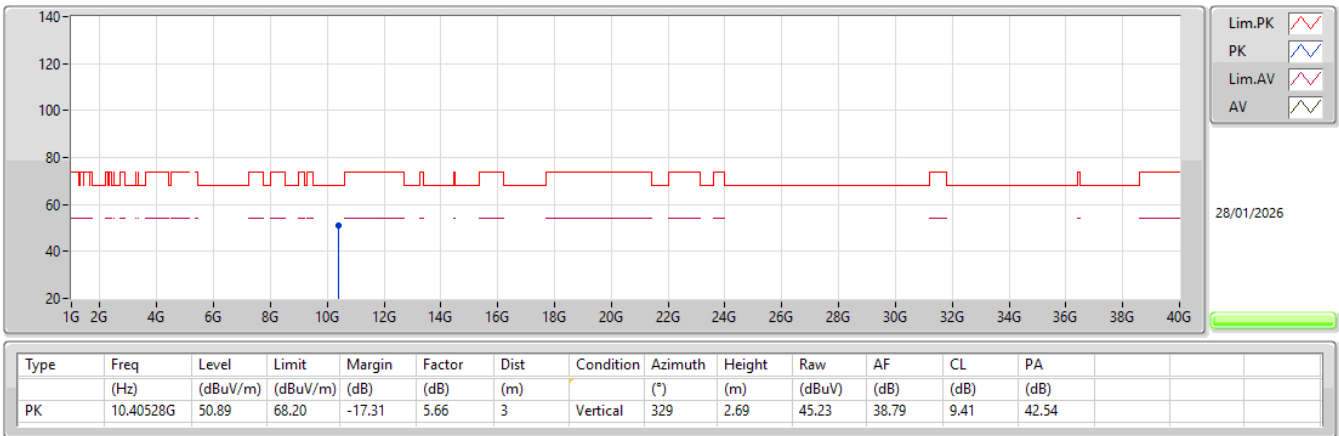


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5210MHz_TX

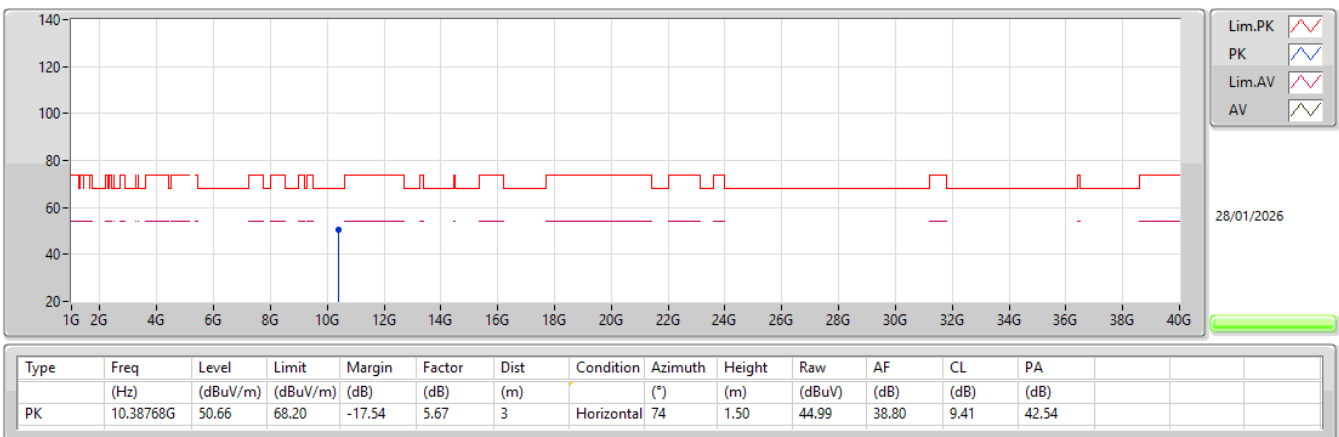

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX


5290MHz_TX

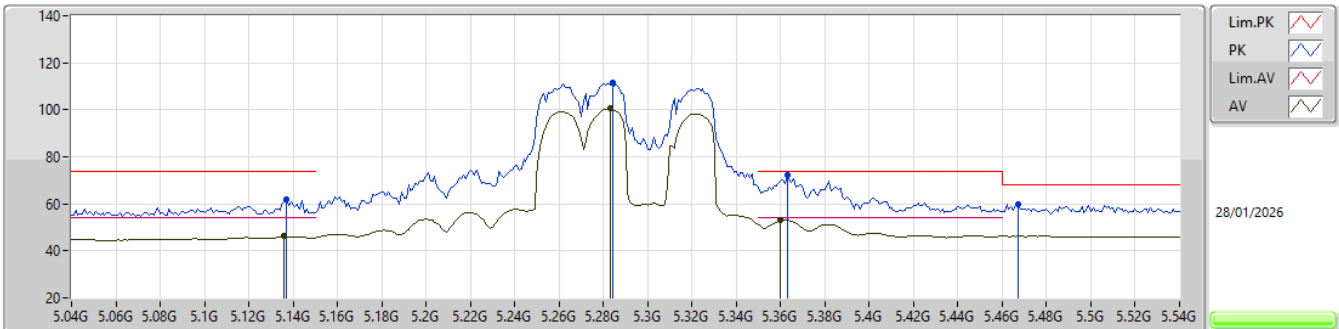

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.136G	46.38	54.00	-7.62	2.46	3	Vertical	2	2.40	43.92	33.34	6.65	37.53
AV	5.283G	100.45	Inf	-Inf	2.35	3	Vertical	2	2.40	98.10	33.17	6.71	37.53
AV	5.36G	53.00	54.00	-1.00	2.29	3	Vertical	2	2.40	50.71	33.12	6.70	37.53
PK	5.137G	61.90	74.00	-12.10	2.47	3	Vertical	2	2.40	59.43	33.35	6.65	37.53
PK	5.284G	111.42	Inf	-Inf	2.34	3	Vertical	2	2.40	109.08	33.16	6.71	37.53
PK	5.363G	72.41	74.00	-1.59	2.30	3	Vertical	2	2.40	70.11	33.13	6.70	37.53
PK	5.467G	60.07	68.20	-8.13	2.46	3	Vertical	2	2.40	57.61	33.23	6.77	37.54

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX


5290MHz_TX

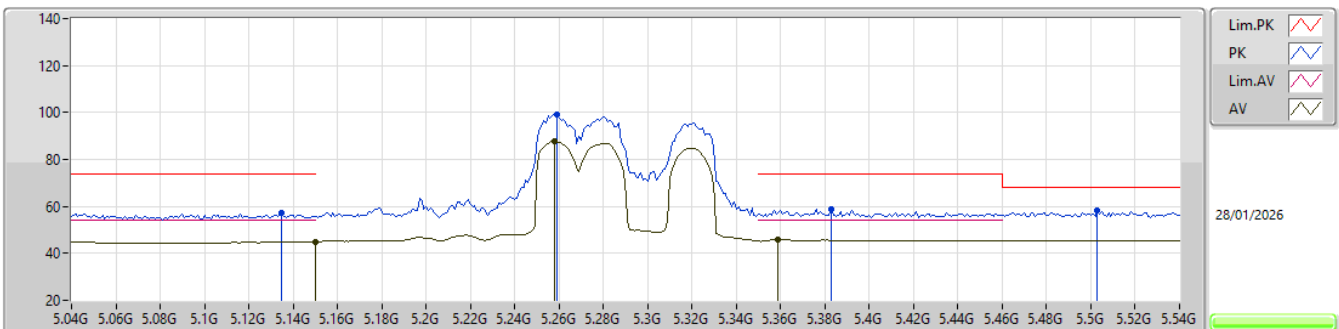

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	44.93	54.00	-9.07	2.54	3	Horizontal	33	1.25	42.39	33.40	6.67	37.53
AV	5.258G	87.59	Inf	-Inf	2.45	3	Horizontal	33	1.25	85.14	33.27	6.71	37.53
AV	5.359G	45.89	54.00	-8.11	2.29	3	Horizontal	33	1.25	43.60	33.12	6.70	37.53
PK	5.135G	57.10	74.00	-16.90	2.46	3	Horizontal	33	1.25	54.64	33.34	6.65	37.53
PK	5.259G	99.33	Inf	-Inf	2.44	3	Horizontal	33	1.25	96.89	33.26	6.71	37.53
PK	5.383G	58.86	74.00	-15.14	2.33	3	Horizontal	33	1.25	56.53	33.17	6.70	37.54
PK	5.503G	58.39	68.20	-9.81	2.57	3	Horizontal	33	1.25	55.82	33.31	6.80	37.54


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5290MHz_TX

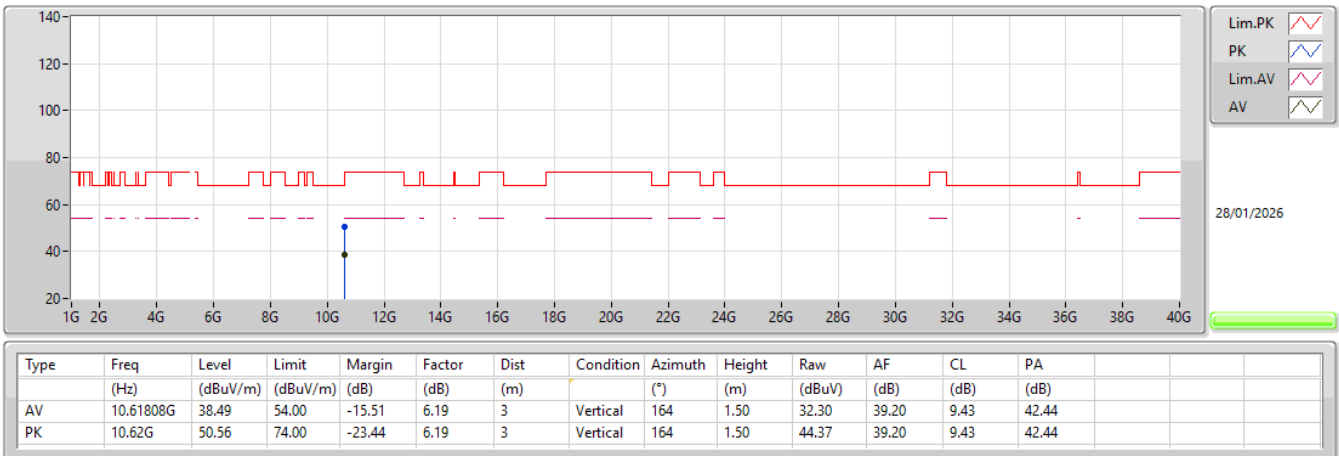


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5290MHz_TX

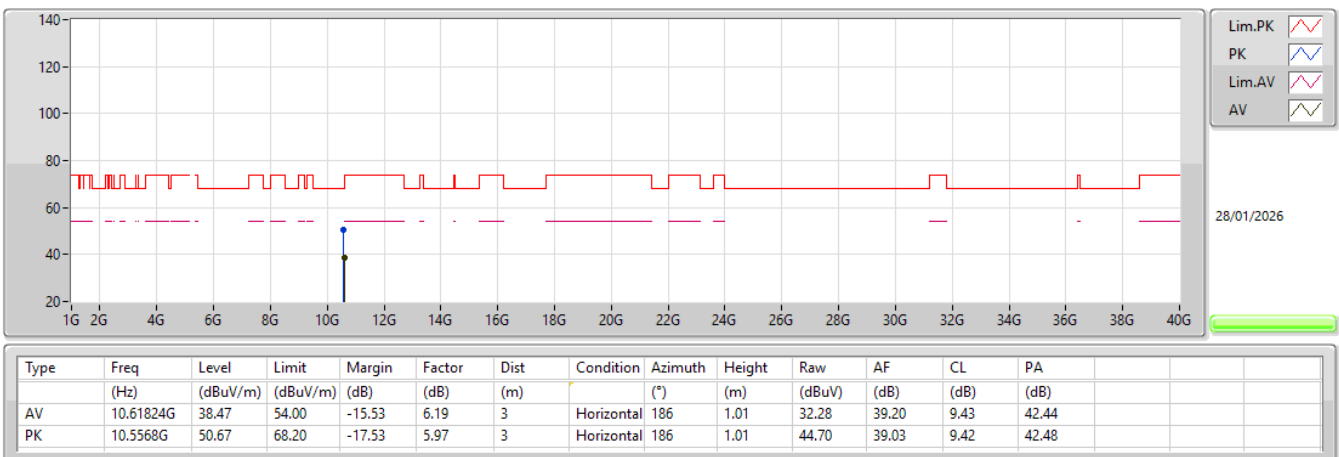


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX

5250MHz Straddle 5.25-5.35GHz_TX

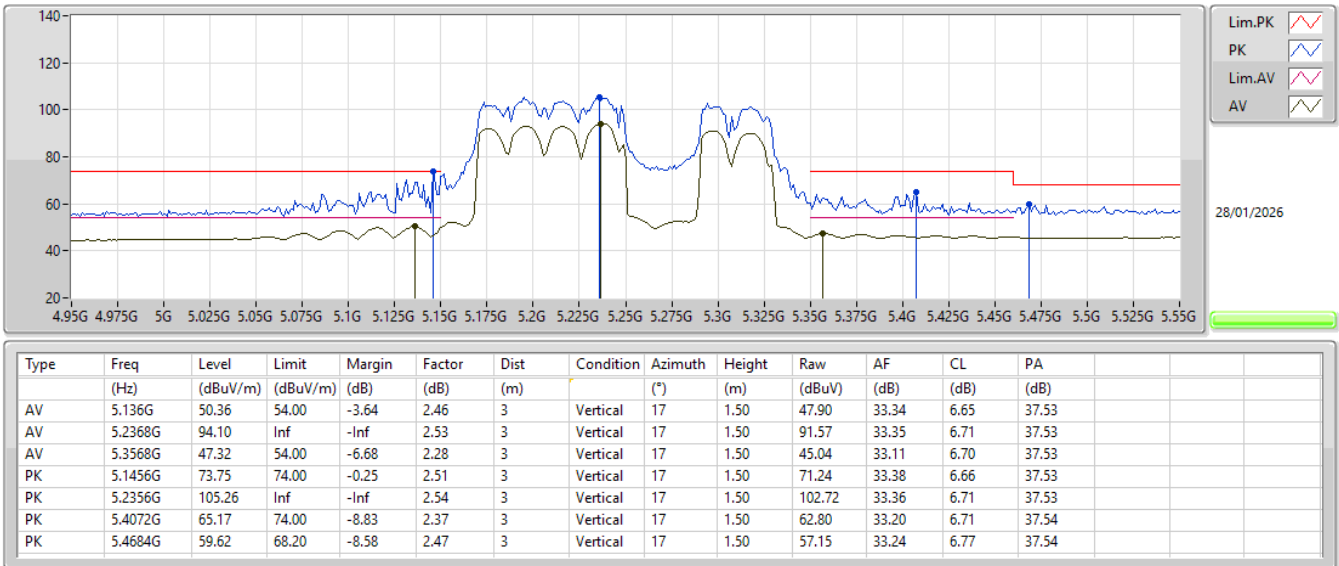


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX

5250MHz Straddle 5.25-5.35GHz_TX

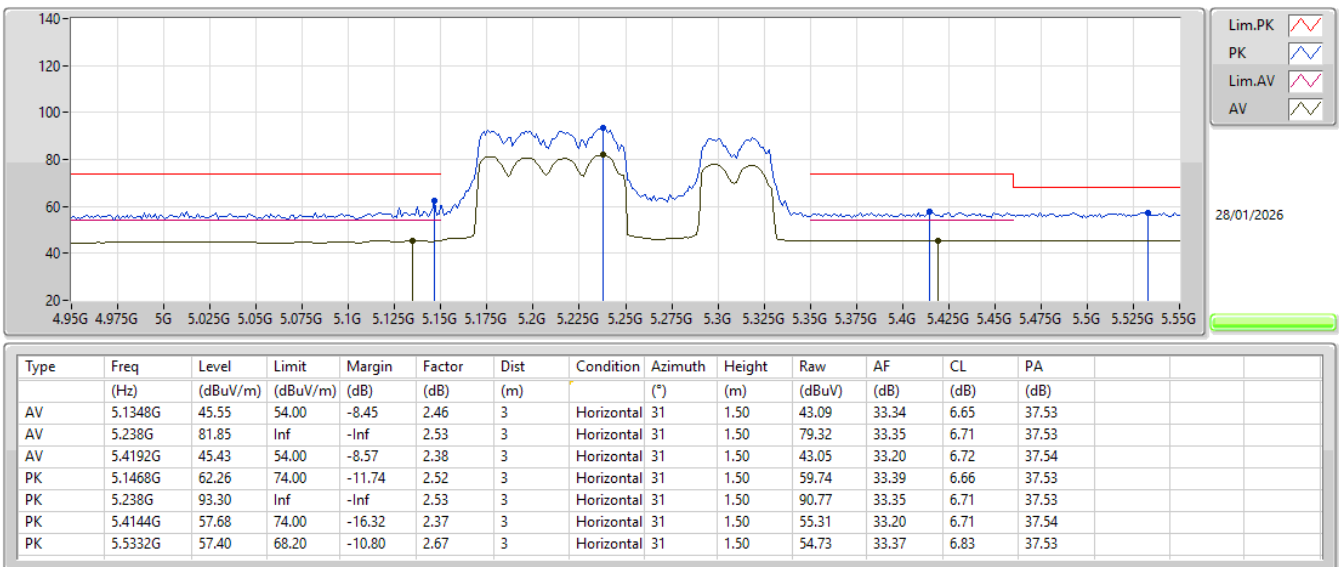


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX

5250MHz Straddle 5.25-5.35GHz_TX

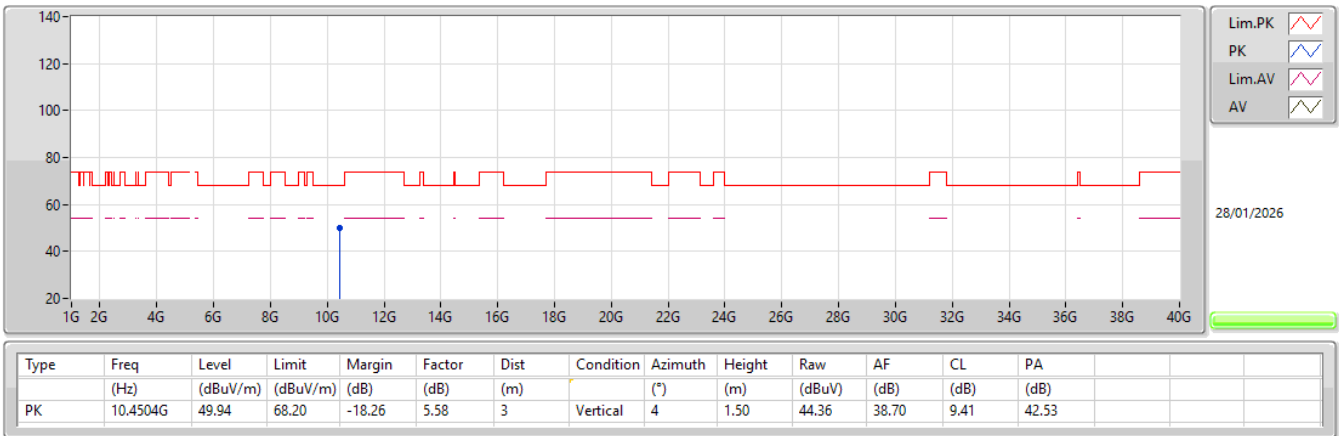


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX

5250MHz Straddle 5.25-5.35GHz_TX

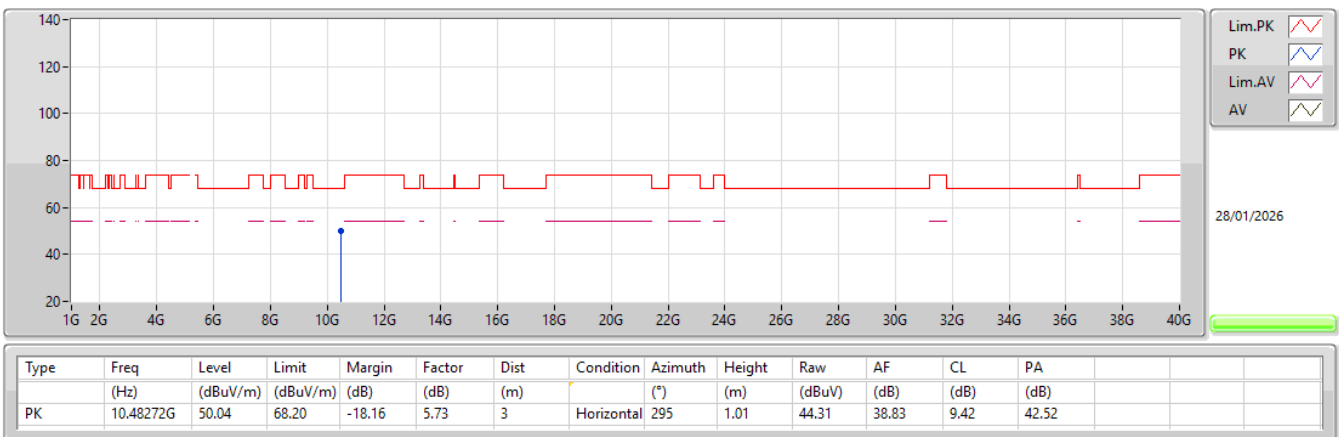

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX


5530MHz_TX

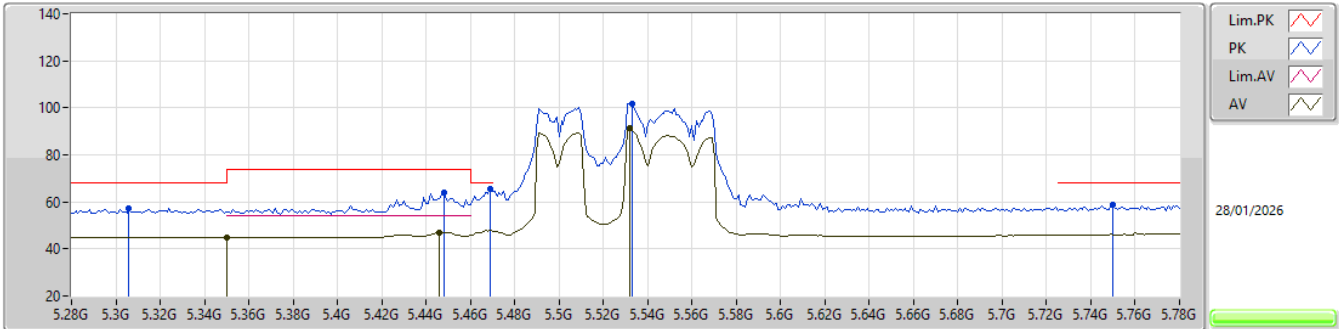

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	44.65	54.00	-9.35	2.27	3	Vertical	345	1.00	42.38	33.10	6.70	37.53
AV	5.446G	46.95	54.00	-7.05	2.41	3	Vertical	345	1.00	44.54	33.20	6.75	37.54
AV	5.532G	91.14	Inf	-Inf	2.66	3	Vertical	345	1.00	88.48	33.36	6.83	37.53
PK	5.306G	57.07	68.20	-11.13	2.27	3	Vertical	345	1.00	54.80	33.10	6.70	37.53
PK	5.448G	63.81	74.00	-10.19	2.41	3	Vertical	345	1.00	61.40	33.20	6.75	37.54
PK	5.469G	65.73	68.20	-2.47	2.47	3	Vertical	345	1.00	63.26	33.24	6.77	37.54
PK	5.533G	101.68	Inf	-Inf	2.67	3	Vertical	345	1.00	99.01	33.37	6.83	37.53
PK	5.75G	58.87	68.20	-9.33	3.84	3	Vertical	345	1.00	55.03	34.10	7.19	37.45

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX


5530MHz_TX

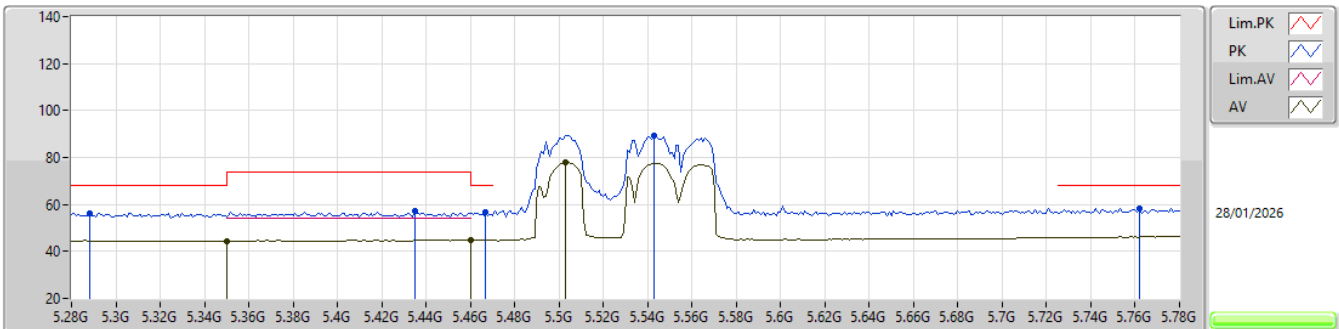

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	44.41	54.00	-9.59	2.27	3	Horizontal	11	2.35	42.14	33.10	6.70	37.53
AV	5.46G	44.88	54.00	-9.12	2.44	3	Horizontal	11	2.35	42.44	33.22	6.76	37.54
AV	5.503G	77.92	Inf	-Inf	2.57	3	Horizontal	11	2.35	75.35	33.31	6.80	37.54
PK	5.288G	56.46	68.20	-11.74	2.33	3	Horizontal	11	2.35	54.13	33.15	6.71	37.53
PK	5.435G	57.22	74.00	-16.78	2.40	3	Horizontal	11	2.35	54.82	33.20	6.74	37.54
PK	5.467G	56.70	68.20	-11.50	2.46	3	Horizontal	11	2.35	54.24	33.23	6.77	37.54
PK	5.543G	89.52	Inf	-Inf	2.70	3	Horizontal	11	2.35	86.82	33.39	6.84	37.53
PK	5.762G	58.29	68.20	-9.91	3.94	3	Horizontal	11	2.35	54.35	34.17	7.22	37.45


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5530MHz_TX

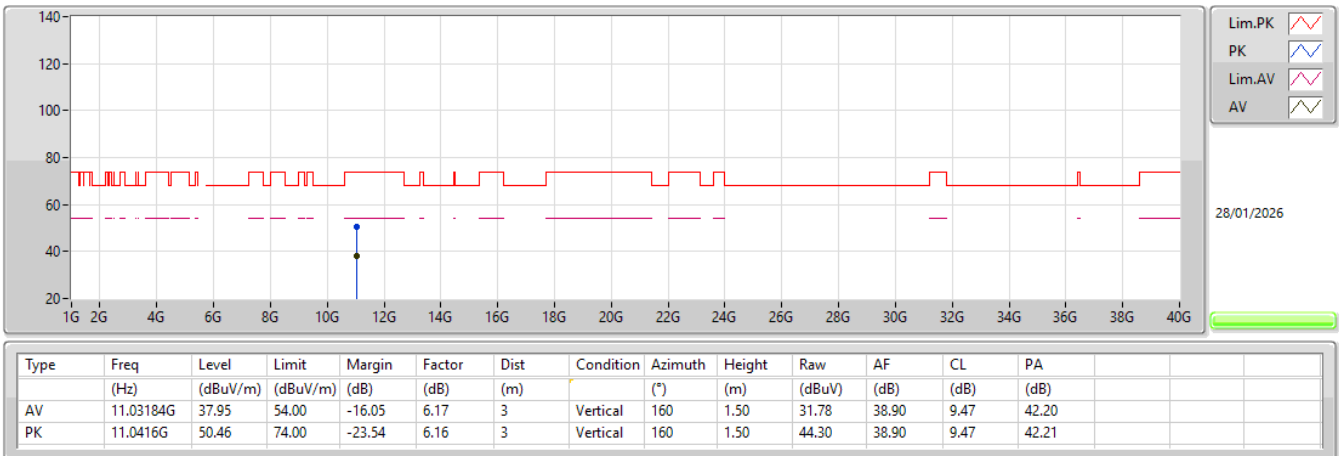


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5530MHz_TX

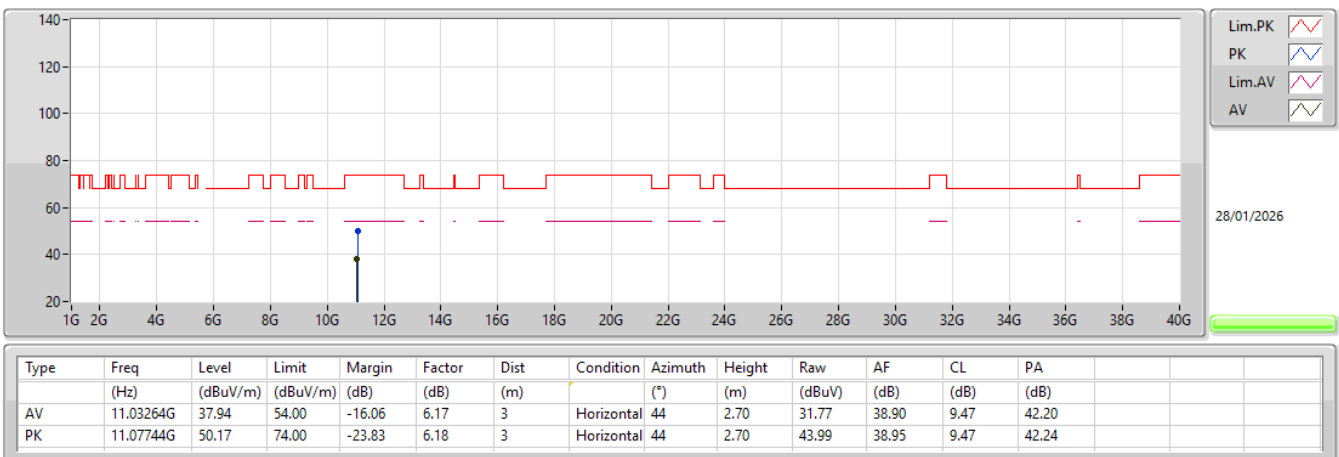


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX

5570MHz_TX

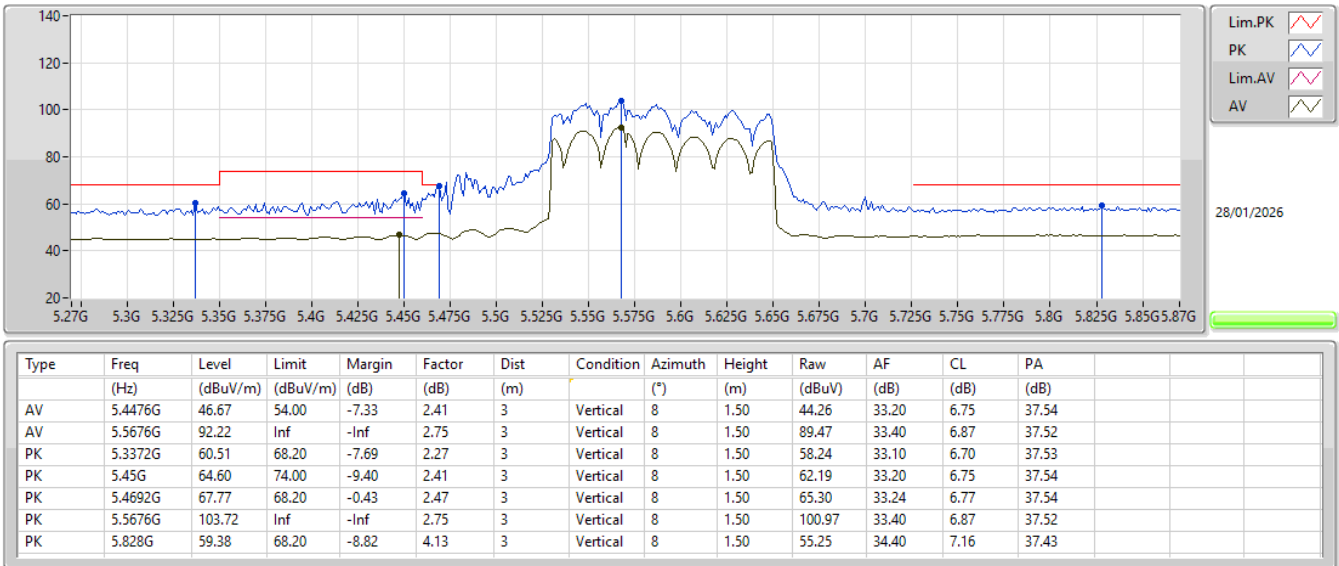


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX

5570MHz_TX

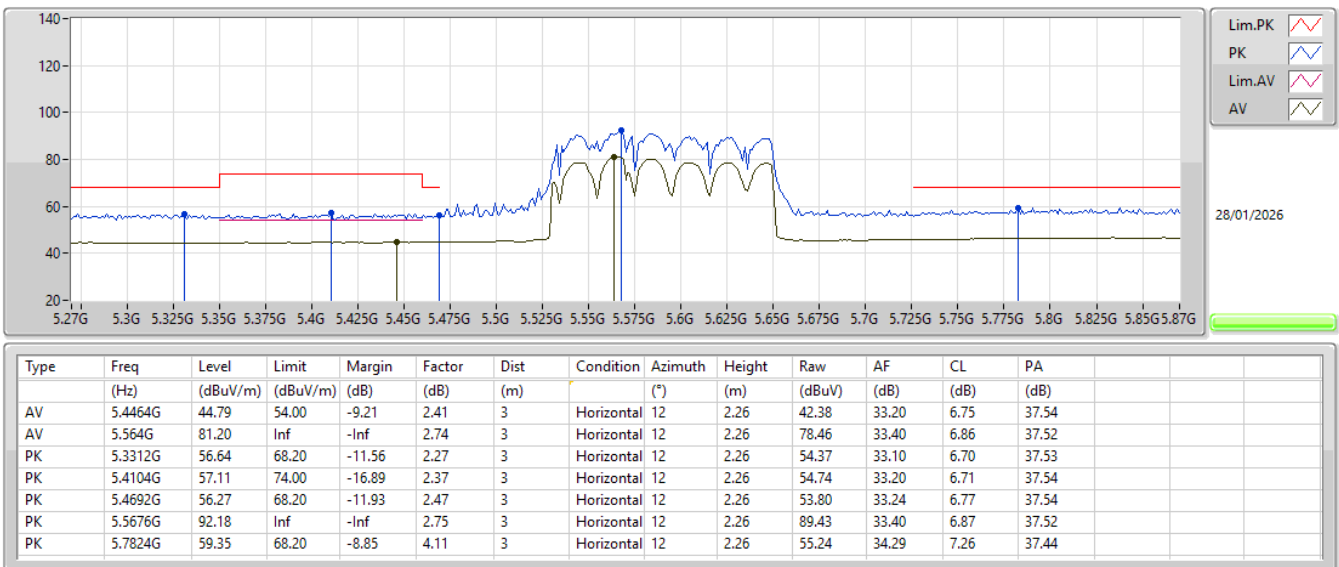


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX

5570MHz_TX

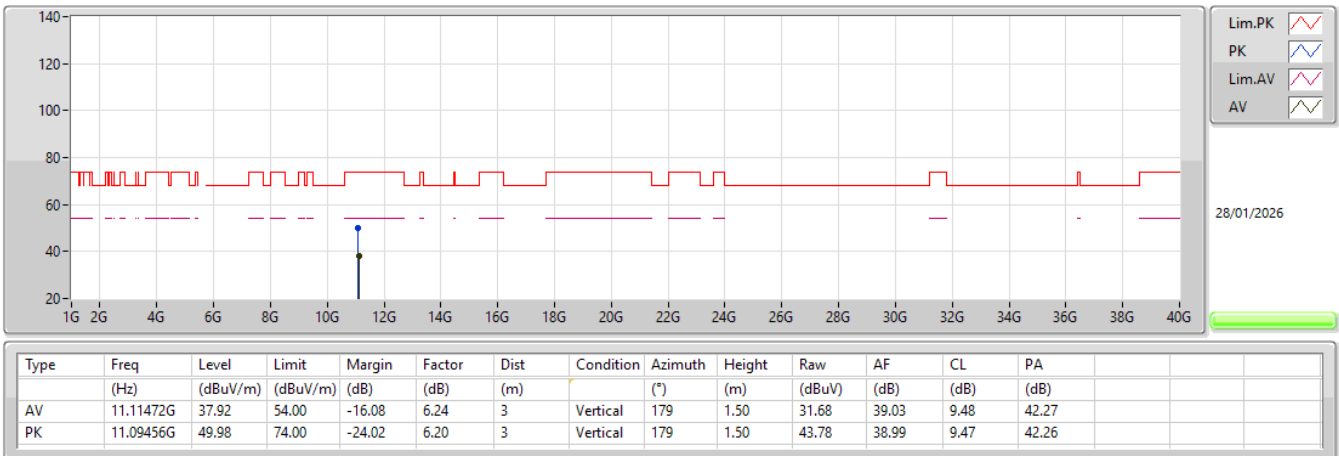


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_2TX

5570MHz_TX

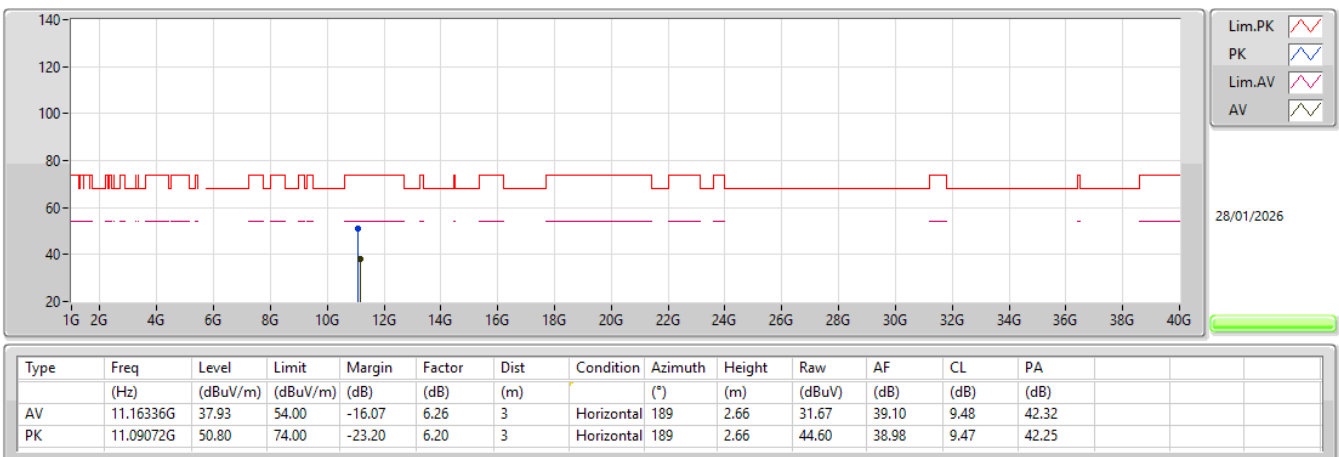


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5775MHz_TX

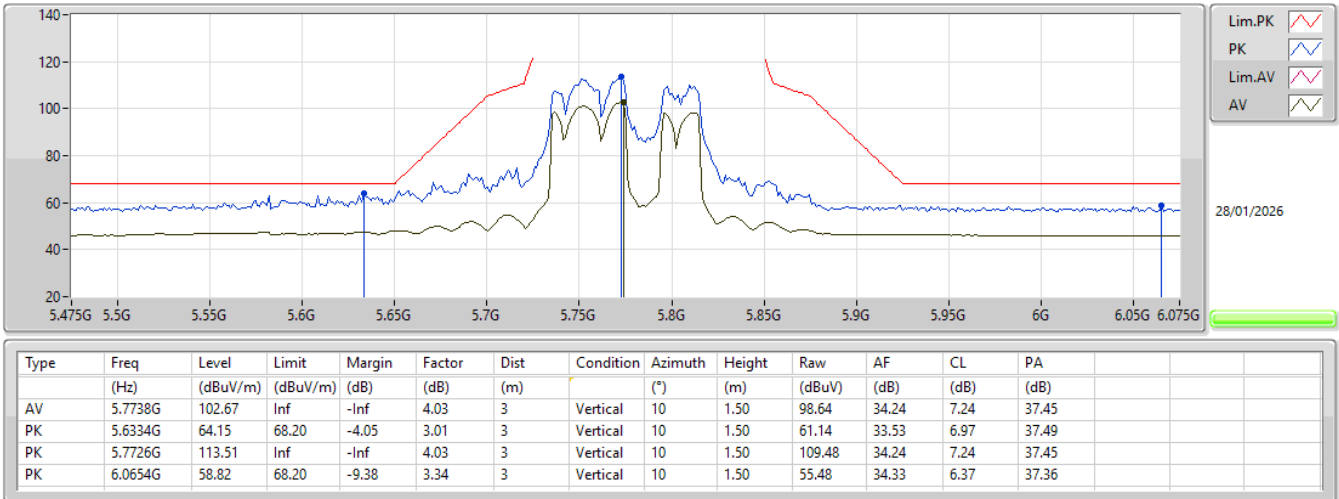


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5775MHz_TX

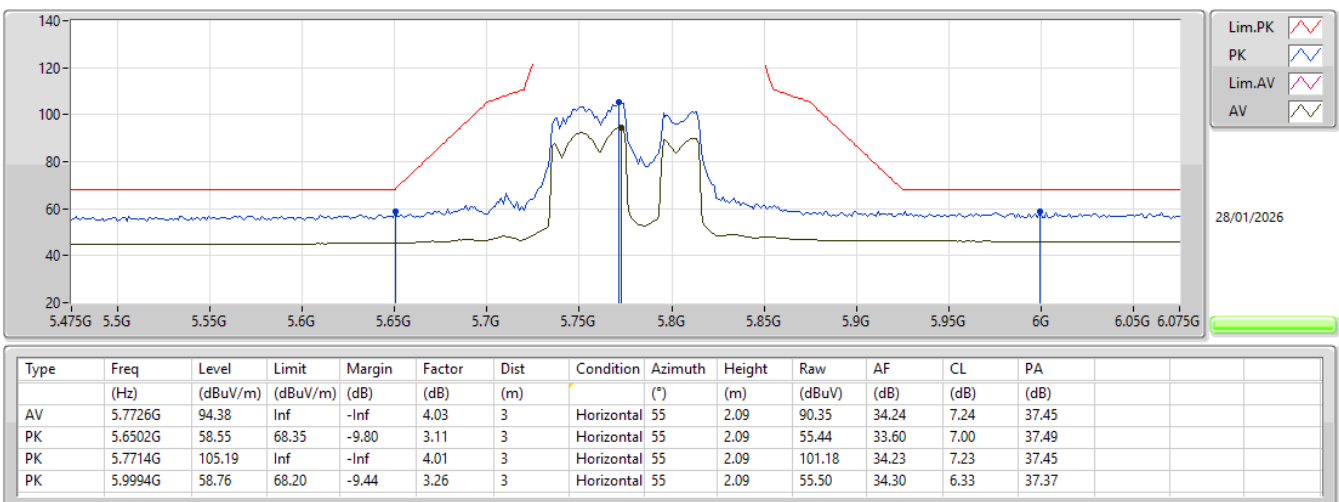


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5775MHz_TX

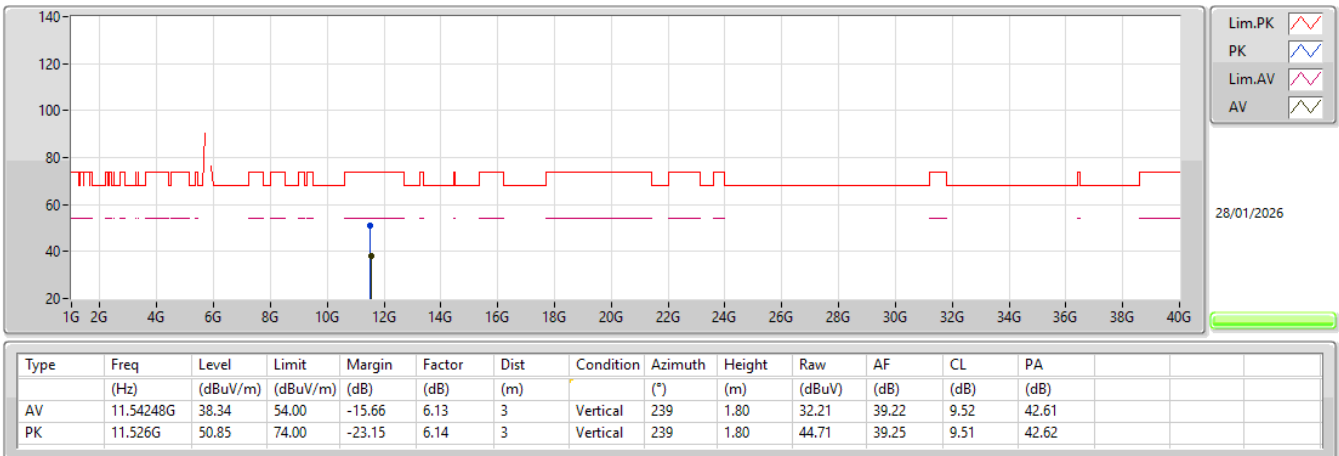

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5775MHz_TX

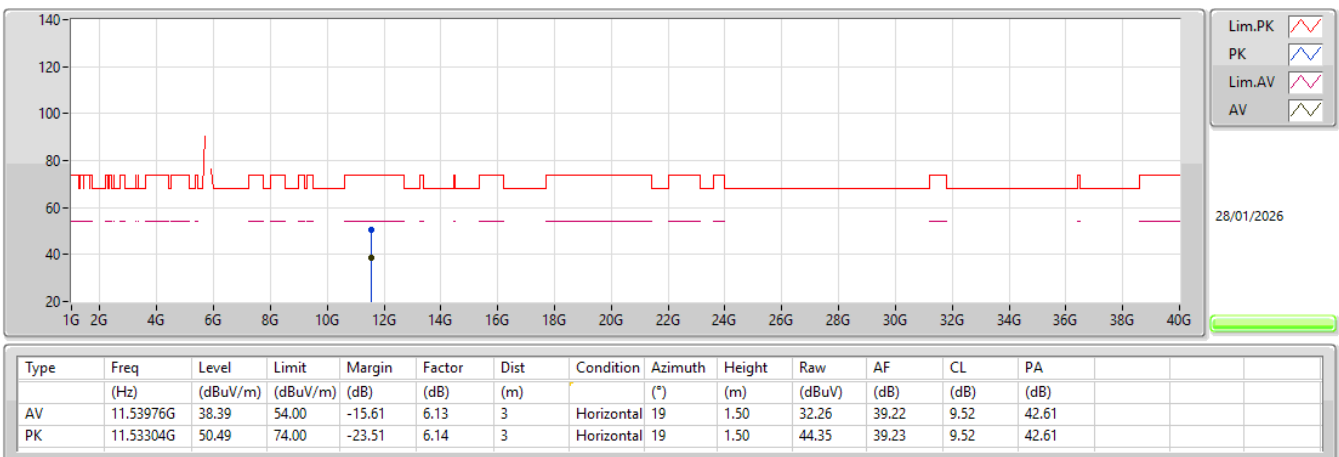

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	5.35G	53.14	54.00	-0.86	3	Horizontal	6	1.00
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	5.353G	51.52	54.00	-2.48	3	Horizontal	5	1.01
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	5.35G	52.58	54.00	-1.42	3	Horizontal	172	2.61
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.35G	53.35	54.00	-0.65	3	Horizontal	173	2.51
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	5.3544G	53.61	54.00	-0.39	3	Horizontal	173	2.07
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	PK	5.4694G	66.67	68.20	-1.53	3	Horizontal	3	1.01
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	PK	5.4696G	66.32	68.20	-1.88	3	Horizontal	4	1.00
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	PK	5.4696G	67.16	68.20	-1.04	3	Horizontal	3	1.00
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	5.725G	65.23	68.20	-2.97	3	Horizontal	9	1.00
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	PK	5.4608G	67.99	68.20	-0.21	3	Horizontal	12	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5260MHz_TX	Pass	AV	5.1496G	44.54	54.00	-9.46	3	Vertical	97	3.00
5260MHz_TX	Pass	AV	5.2582G	100.88	Inf	-Inf	3	Vertical	97	3.00
5260MHz_TX	Pass	AV	5.359G	45.04	54.00	-8.96	3	Vertical	97	3.00
5260MHz_TX	Pass	PK	5.1412G	57.25	74.00	-16.75	3	Vertical	97	3.00
5260MHz_TX	Pass	PK	5.2582G	109.76	Inf	-Inf	3	Vertical	97	3.00
5260MHz_TX	Pass	PK	5.3962G	57.94	74.00	-16.06	3	Vertical	97	3.00
5260MHz_TX	Pass	AV	5.1484G	44.78	54.00	-9.22	3	Horizontal	178	2.17
5260MHz_TX	Pass	AV	5.2606G	107.75	Inf	-Inf	3	Horizontal	178	2.17
5260MHz_TX	Pass	AV	5.3566G	45.53	54.00	-8.47	3	Horizontal	178	2.17
5260MHz_TX	Pass	PK	5.15G	56.74	74.00	-17.26	3	Horizontal	178	2.17
5260MHz_TX	Pass	PK	5.2606G	115.89	Inf	-Inf	3	Horizontal	178	2.17
5260MHz_TX	Pass	PK	5.362G	57.70	74.00	-16.30	3	Horizontal	178	2.17
5260MHz_TX	Pass	AV	15.77634G	42.55	54.00	-11.45	3	Vertical	14	1.54
5260MHz_TX	Pass	PK	10.5176G	57.45	68.20	-10.75	3	Vertical	38	1.43
5260MHz_TX	Pass	PK	15.78252G	53.85	74.00	-20.15	3	Vertical	14	1.54
5260MHz_TX	Pass	AV	15.77748G	42.30	54.00	-11.70	3	Horizontal	305	2.19
5260MHz_TX	Pass	PK	10.52072G	57.33	68.20	-10.87	3	Horizontal	325	1.51
5260MHz_TX	Pass	PK	15.7791G	55.12	74.00	-18.88	3	Horizontal	305	2.19
5300MHz_TX	Pass	AV	5.2988G	100.55	Inf	-Inf	3	Vertical	95	3.00
5300MHz_TX	Pass	AV	5.3956G	44.65	54.00	-9.35	3	Vertical	95	3.00
5300MHz_TX	Pass	PK	5.2984G	109.19	Inf	-Inf	3	Vertical	95	3.00
5300MHz_TX	Pass	PK	5.3712G	56.68	74.00	-17.32	3	Vertical	95	3.00
5300MHz_TX	Pass	AV	5.3008G	106.90	Inf	-Inf	3	Horizontal	169	2.05
5300MHz_TX	Pass	AV	5.3508G	45.10	54.00	-8.90	3	Horizontal	169	2.05
5300MHz_TX	Pass	PK	5.3008G	115.14	Inf	-Inf	3	Horizontal	169	2.05
5300MHz_TX	Pass	PK	5.3504G	57.20	74.00	-16.80	3	Horizontal	169	2.05
5300MHz_TX	Pass	AV	10.60162G	44.11	54.00	-9.89	3	Vertical	319	1.50
5300MHz_TX	Pass	AV	15.89994G	40.94	54.00	-13.06	3	Vertical	19	1.80
5300MHz_TX	Pass	PK	10.59688G	55.67	68.20	-12.53	3	Vertical	319	1.50
5300MHz_TX	Pass	PK	15.90018G	52.85	74.00	-21.15	3	Vertical	19	1.80
5300MHz_TX	Pass	AV	10.60108G	44.31	54.00	-9.69	3	Horizontal	328	1.56
5300MHz_TX	Pass	AV	15.89892G	40.91	54.00	-13.09	3	Horizontal	59	2.14
5300MHz_TX	Pass	PK	10.59604G	55.80	68.20	-12.40	3	Horizontal	328	1.56
5300MHz_TX	Pass	PK	15.89628G	52.31	74.00	-21.69	3	Horizontal	59	2.14
5320MHz_TX	Pass	AV	5.3192G	100.10	Inf	-Inf	3	Vertical	98	1.00
5320MHz_TX	Pass	AV	5.35G	46.81	54.00	-7.19	3	Vertical	98	1.00
5320MHz_TX	Pass	PK	5.3188G	108.67	Inf	-Inf	3	Vertical	98	1.00
5320MHz_TX	Pass	PK	5.3502G	60.22	74.00	-13.78	3	Vertical	98	1.00
5320MHz_TX	Pass	AV	5.3192G	108.45	Inf	-Inf	3	Horizontal	6	1.00
5320MHz_TX	Pass	AV	5.35G	53.14	54.00	-0.86	3	Horizontal	6	1.00
5320MHz_TX	Pass	PK	5.3192G	116.66	Inf	-Inf	3	Horizontal	6	1.00
5320MHz_TX	Pass	PK	5.35G	68.37	74.00	-5.63	3	Horizontal	6	1.00
5320MHz_TX	Pass	AV	10.64138G	43.43	54.00	-10.57	3	Vertical	41	1.45
5320MHz_TX	Pass	AV	15.95712G	39.42	54.00	-14.58	3	Vertical	19	1.50
5320MHz_TX	Pass	PK	10.64054G	55.36	74.00	-18.64	3	Vertical	41	1.45
5320MHz_TX	Pass	PK	15.95868G	51.21	74.00	-22.79	3	Vertical	19	1.50
5320MHz_TX	Pass	AV	10.64066G	42.99	54.00	-11.01	3	Horizontal	329	1.58
5320MHz_TX	Pass	AV	15.95904G	39.89	54.00	-14.11	3	Horizontal	48	1.61
5320MHz_TX	Pass	PK	10.6409G	55.01	74.00	-18.99	3	Horizontal	329	1.58
5320MHz_TX	Pass	PK	15.95346G	51.75	74.00	-22.25	3	Horizontal	48	1.61
5500MHz_TX	Pass	AV	5.4596G	43.44	54.00	-10.56	3	Vertical	77	1.08
5500MHz_TX	Pass	AV	5.4992G	98.83	Inf	-Inf	3	Vertical	77	1.08
5500MHz_TX	Pass	PK	5.4576G	55.37	74.00	-18.63	3	Vertical	77	1.08
5500MHz_TX	Pass	PK	5.4692G	57.29	68.20	-10.91	3	Vertical	77	1.08
5500MHz_TX	Pass	PK	5.499G	107.25	Inf	-Inf	3	Vertical	77	1.08
5500MHz_TX	Pass	AV	5.4594G	46.39	54.00	-7.61	3	Horizontal	3	1.01
5500MHz_TX	Pass	AV	5.4994G	110.42	Inf	-Inf	3	Horizontal	3	1.01
5500MHz_TX	Pass	PK	5.459G	59.26	74.00	-14.74	3	Horizontal	3	1.01
5500MHz_TX	Pass	PK	5.4694G	66.67	68.20	-1.53	3	Horizontal	3	1.01
5500MHz_TX	Pass	PK	5.4992G	118.57	Inf	-Inf	3	Horizontal	3	1.01

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5500MHz_TX	Pass	AV	11.00186G	44.98	54.00	-9.02	3	Vertical	44	1.62
5500MHz_TX	Pass	PK	11.00192G	58.04	74.00	-15.96	3	Vertical	44	1.62
5500MHz_TX	Pass	PK	16.49994G	52.44	68.20	-15.76	3	Vertical	19	2.75
5500MHz_TX	Pass	AV	11.0015G	44.90	54.00	-9.10	3	Horizontal	297	1.58
5500MHz_TX	Pass	PK	11.00192G	56.69	74.00	-17.31	3	Horizontal	297	1.58
5500MHz_TX	Pass	PK	16.4937G	53.70	68.20	-14.50	3	Horizontal	289	1.49
5580MHz_TX	Pass	AV	5.4432G	44.77	54.00	-9.23	3	Vertical	94	1.00
5580MHz_TX	Pass	AV	5.5794G	98.68	Inf	-Inf	3	Vertical	94	1.00
5580MHz_TX	Pass	PK	5.4576G	56.62	74.00	-17.38	3	Vertical	94	1.00
5580MHz_TX	Pass	PK	5.463G	56.81	68.20	-11.39	3	Vertical	94	1.00
5580MHz_TX	Pass	PK	5.5794G	106.79	Inf	-Inf	3	Vertical	94	1.00
5580MHz_TX	Pass	PK	5.7258G	58.02	68.20	-10.18	3	Vertical	94	1.00
5580MHz_TX	Pass	AV	5.4522G	45.21	54.00	-8.79	3	Horizontal	11	1.00
5580MHz_TX	Pass	AV	5.5794G	110.36	Inf	-Inf	3	Horizontal	11	1.00
5580MHz_TX	Pass	PK	5.4588G	57.94	74.00	-16.06	3	Horizontal	11	1.00
5580MHz_TX	Pass	PK	5.4666G	57.17	68.20	-11.03	3	Horizontal	11	1.00
5580MHz_TX	Pass	PK	5.5794G	118.34	Inf	-Inf	3	Horizontal	11	1.00
5580MHz_TX	Pass	PK	5.7252G	57.78	68.20	-10.42	3	Horizontal	11	1.00
5580MHz_TX	Pass	AV	11.15994G	42.74	54.00	-11.26	3	Vertical	12	1.74
5580MHz_TX	Pass	PK	11.16006G	53.70	74.00	-20.30	3	Vertical	12	1.74
5580MHz_TX	Pass	PK	16.74162G	53.89	68.20	-14.31	3	Vertical	20	1.00
5580MHz_TX	Pass	AV	11.16096G	44.07	54.00	-9.93	3	Horizontal	298	1.47
5580MHz_TX	Pass	PK	11.16036G	56.46	74.00	-17.54	3	Horizontal	298	1.47
5580MHz_TX	Pass	PK	16.743G	53.03	68.20	-15.17	3	Horizontal	334	1.45
5700MHz_TX	Pass	AV	5.6992G	98.32	Inf	-Inf	3	Vertical	129	1.00
5700MHz_TX	Pass	PK	5.6992G	106.50	Inf	-Inf	3	Vertical	129	1.00
5700MHz_TX	Pass	PK	5.796G	59.79	68.20	-8.41	3	Vertical	129	1.00
5700MHz_TX	Pass	AV	5.6992G	110.05	Inf	-Inf	3	Horizontal	7	1.01
5700MHz_TX	Pass	PK	5.6992G	118.23	Inf	-Inf	3	Horizontal	7	1.01
5700MHz_TX	Pass	PK	5.7252G	61.50	68.20	-6.70	3	Horizontal	7	1.01
5700MHz_TX	Pass	AV	11.4G	42.31	54.00	-11.69	3	Vertical	349	1.53
5700MHz_TX	Pass	PK	11.39994G	53.42	74.00	-20.58	3	Vertical	349	1.53
5700MHz_TX	Pass	PK	17.10594G	51.89	68.20	-16.31	3	Vertical	255	1.53
5700MHz_TX	Pass	AV	11.4009G	44.92	54.00	-9.08	3	Horizontal	80	1.58
5700MHz_TX	Pass	PK	11.40048G	57.85	74.00	-16.15	3	Horizontal	80	1.58
5700MHz_TX	Pass	PK	17.08554G	52.89	68.20	-15.31	3	Horizontal	360	2.68
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4308G	45.14	54.00	-8.86	3	Vertical	91	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.7188G	98.64	Inf	-Inf	3	Vertical	91	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4248G	56.61	74.00	-17.39	3	Vertical	91	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4608G	57.45	68.20	-10.75	3	Vertical	91	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.7188G	106.78	Inf	-Inf	3	Vertical	91	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.9744G	59.08	68.20	-9.12	3	Vertical	91	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4308G	48.13	54.00	-5.87	3	Horizontal	9	1.02
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.7188G	109.50	Inf	-Inf	3	Horizontal	9	1.02
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4308G	58.73	74.00	-15.27	3	Horizontal	9	1.02
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4692G	57.10	68.20	-11.10	3	Horizontal	9	1.02
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.7188G	117.56	Inf	-Inf	3	Horizontal	9	1.02
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.9204G	59.78	68.20	-8.42	3	Horizontal	9	1.02
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.43982G	43.05	54.00	-10.95	3	Vertical	349	1.45
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.44492G	54.41	74.00	-19.59	3	Vertical	349	1.45
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	17.16276G	52.98	68.20	-15.22	3	Vertical	23	1.55
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.44078G	45.41	54.00	-8.59	3	Horizontal	82	1.55
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.44078G	57.00	74.00	-17.00	3	Horizontal	82	1.55
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	17.16954G	52.70	68.20	-15.50	3	Horizontal	294	1.42
802.11b EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5260MHz_TX	Pass	AV	5.15G	44.54	54.00	-9.46	3	Vertical	95	3.00
5260MHz_TX	Pass	AV	5.2528G	98.59	Inf	-Inf	3	Vertical	95	3.00
5260MHz_TX	Pass	AV	5.3536G	45.05	54.00	-8.95	3	Vertical	95	3.00
5260MHz_TX	Pass	PK	5.146G	56.56	74.00	-17.44	3	Vertical	95	3.00
5260MHz_TX	Pass	PK	5.2528G	109.97	Inf	-Inf	3	Vertical	95	3.00
5260MHz_TX	Pass	PK	5.3596G	57.88	74.00	-16.12	3	Vertical	95	3.00
5260MHz_TX	Pass	AV	5.15G	44.78	54.00	-9.22	3	Horizontal	178	2.43

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5260MHz_TX	Pass	AV	5.2606G	107.24	Inf	-Inf	3	Horizontal	178	2.43
5260MHz_TX	Pass	AV	5.356G	45.70	54.00	-8.30	3	Horizontal	178	2.43
5260MHz_TX	Pass	PK	5.1466G	56.80	74.00	-17.20	3	Horizontal	178	2.43
5260MHz_TX	Pass	PK	5.2606G	117.65	Inf	-Inf	3	Horizontal	178	2.43
5260MHz_TX	Pass	PK	5.3578G	57.80	74.00	-16.20	3	Horizontal	178	2.43
5260MHz_TX	Pass	AV	15.78576G	41.13	54.00	-12.87	3	Vertical	14	1.61
5260MHz_TX	Pass	PK	10.50878G	55.62	68.20	-12.58	3	Vertical	38	1.43
5260MHz_TX	Pass	PK	15.7842G	52.93	74.00	-21.07	3	Vertical	14	1.61
5260MHz_TX	Pass	AV	15.7896G	40.43	54.00	-13.57	3	Horizontal	54	1.45
5260MHz_TX	Pass	PK	10.52174G	56.00	68.20	-12.20	3	Horizontal	327	1.54
5260MHz_TX	Pass	PK	15.79296G	54.51	74.00	-19.49	3	Horizontal	54	1.45
5300MHz_TX	Pass	AV	5.2924G	98.11	Inf	-Inf	3	Vertical	92	3.00
5300MHz_TX	Pass	AV	5.3512G	44.77	54.00	-9.23	3	Vertical	92	3.00
5300MHz_TX	Pass	PK	5.2912G	110.32	Inf	-Inf	3	Vertical	92	3.00
5300MHz_TX	Pass	PK	5.366G	57.54	74.00	-16.46	3	Vertical	92	3.00
5300MHz_TX	Pass	AV	5.2992G	106.75	Inf	-Inf	3	Horizontal	175	2.48
5300MHz_TX	Pass	AV	5.354G	45.69	54.00	-8.31	3	Horizontal	175	2.48
5300MHz_TX	Pass	PK	5.3004G	118.27	Inf	-Inf	3	Horizontal	175	2.48
5300MHz_TX	Pass	PK	5.368G	58.03	74.00	-15.97	3	Horizontal	175	2.48
5300MHz_TX	Pass	AV	10.60516G	43.20	54.00	-10.80	3	Vertical	40	1.45
5300MHz_TX	Pass	AV	15.89784G	41.04	54.00	-12.96	3	Vertical	21	1.90
5300MHz_TX	Pass	PK	10.6042G	54.70	74.00	-19.30	3	Vertical	40	1.45
5300MHz_TX	Pass	PK	15.89682G	53.72	74.00	-20.28	3	Vertical	21	1.90
5300MHz_TX	Pass	AV	10.60324G	43.36	54.00	-10.64	3	Horizontal	329	1.49
5300MHz_TX	Pass	AV	15.89838G	40.89	54.00	-13.11	3	Horizontal	296	2.51
5300MHz_TX	Pass	PK	10.60216G	54.77	74.00	-19.23	3	Horizontal	329	1.49
5300MHz_TX	Pass	PK	15.90612G	53.32	74.00	-20.68	3	Horizontal	296	2.51
5320MHz_TX	Pass	AV	5.3116G	97.47	Inf	-Inf	3	Vertical	98	3.00
5320MHz_TX	Pass	AV	5.35G	48.00	54.00	-6.00	3	Vertical	98	3.00
5320MHz_TX	Pass	PK	5.3114G	109.12	Inf	-Inf	3	Vertical	98	3.00
5320MHz_TX	Pass	PK	5.3514G	61.87	74.00	-12.13	3	Vertical	98	3.00
5320MHz_TX	Pass	AV	5.3192G	107.32	Inf	-Inf	3	Horizontal	5	1.01
5320MHz_TX	Pass	AV	5.353G	51.52	54.00	-2.48	3	Horizontal	5	1.01
5320MHz_TX	Pass	PK	5.3186G	118.98	Inf	-Inf	3	Horizontal	5	1.01
5320MHz_TX	Pass	PK	5.3562G	67.43	74.00	-6.57	3	Horizontal	5	1.01
5320MHz_TX	Pass	AV	10.64342G	42.35	54.00	-11.65	3	Vertical	41	1.46
5320MHz_TX	Pass	AV	15.9738G	38.96	54.00	-15.04	3	Vertical	173	1.80
5320MHz_TX	Pass	PK	10.64306G	54.04	74.00	-19.96	3	Vertical	41	1.46
5320MHz_TX	Pass	PK	15.9648G	50.79	74.00	-23.21	3	Vertical	173	1.80
5320MHz_TX	Pass	AV	10.64222G	42.21	54.00	-11.79	3	Horizontal	329	1.50
5320MHz_TX	Pass	AV	15.95988G	39.19	54.00	-14.81	3	Horizontal	58	1.50
5320MHz_TX	Pass	PK	10.646G	54.29	74.00	-19.71	3	Horizontal	329	1.50
5320MHz_TX	Pass	PK	15.95094G	50.92	74.00	-23.08	3	Horizontal	58	1.50
5500MHz_TX	Pass	AV	5.4558G	44.90	54.00	-9.10	3	Vertical	111	1.00
5500MHz_TX	Pass	AV	5.499G	98.19	Inf	-Inf	3	Vertical	111	1.00
5500MHz_TX	Pass	PK	5.4544G	56.84	74.00	-17.16	3	Vertical	111	1.00
5500MHz_TX	Pass	PK	5.4682G	58.52	68.20	-9.68	3	Vertical	111	1.00
5500MHz_TX	Pass	PK	5.4982G	109.24	Inf	-Inf	3	Vertical	111	1.00
5500MHz_TX	Pass	AV	5.4596G	48.29	54.00	-5.71	3	Horizontal	4	1.00
5500MHz_TX	Pass	AV	5.4994G	109.50	Inf	-Inf	3	Horizontal	4	1.00
5500MHz_TX	Pass	PK	5.4574G	62.84	74.00	-11.16	3	Horizontal	4	1.00
5500MHz_TX	Pass	PK	5.4696G	66.32	68.20	-1.88	3	Horizontal	4	1.00
5500MHz_TX	Pass	PK	5.4988G	121.29	Inf	-Inf	3	Horizontal	4	1.00
5500MHz_TX	Pass	AV	10.99982G	45.02	54.00	-8.98	3	Vertical	42	1.26
5500MHz_TX	Pass	PK	11.00252G	57.16	74.00	-16.84	3	Vertical	42	1.26
5500MHz_TX	Pass	PK	16.49442G	52.83	68.20	-15.37	3	Vertical	281	2.51
5500MHz_TX	Pass	AV	11.00156G	44.38	54.00	-9.62	3	Horizontal	332	1.62
5500MHz_TX	Pass	PK	10.99898G	56.24	74.00	-17.76	3	Horizontal	332	1.62
5500MHz_TX	Pass	PK	16.49892G	54.18	68.20	-14.02	3	Horizontal	62	1.46
5580MHz_TX	Pass	AV	5.451G	44.69	54.00	-9.31	3	Vertical	93	1.01
5580MHz_TX	Pass	AV	5.5788G	96.94	Inf	-Inf	3	Vertical	93	1.01
5580MHz_TX	Pass	PK	5.4456G	56.84	74.00	-17.16	3	Vertical	93	1.01

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5580MHz_TX	Pass	PK	5.4678G	56.66	68.20	-11.54	3	Vertical	93	1.01
5580MHz_TX	Pass	PK	5.5788G	107.55	Inf	-Inf	3	Vertical	93	1.01
5580MHz_TX	Pass	PK	5.73G	58.57	68.20	-9.63	3	Vertical	93	1.01
5580MHz_TX	Pass	AV	5.4534G	45.17	54.00	-8.83	3	Horizontal	12	1.00
5580MHz_TX	Pass	AV	5.5794G	108.92	Inf	-Inf	3	Horizontal	12	1.00
5580MHz_TX	Pass	PK	5.4354G	57.94	74.00	-16.06	3	Horizontal	12	1.00
5580MHz_TX	Pass	PK	5.469G	57.83	68.20	-10.37	3	Horizontal	12	1.00
5580MHz_TX	Pass	PK	5.5794G	119.65	Inf	-Inf	3	Horizontal	12	1.00
5580MHz_TX	Pass	PK	5.7252G	57.76	68.20	-10.44	3	Horizontal	12	1.00
5580MHz_TX	Pass	AV	11.1618G	42.29	54.00	-11.71	3	Vertical	13	1.66
5580MHz_TX	Pass	PK	11.16186G	54.05	74.00	-19.95	3	Vertical	13	1.66
5580MHz_TX	Pass	PK	16.73646G	54.49	68.20	-13.71	3	Vertical	21	1.03
5580MHz_TX	Pass	AV	11.16354G	43.57	54.00	-10.43	3	Horizontal	298	1.45
5580MHz_TX	Pass	PK	11.16126G	56.22	74.00	-17.78	3	Horizontal	298	1.45
5580MHz_TX	Pass	PK	16.72896G	54.03	68.20	-14.17	3	Horizontal	329	1.76
5700MHz_TX	Pass	AV	5.6988G	97.99	Inf	-Inf	3	Vertical	96	1.00
5700MHz_TX	Pass	PK	5.6984G	109.08	Inf	-Inf	3	Vertical	96	1.00
5700MHz_TX	Pass	PK	5.7968G	58.99	68.20	-9.21	3	Vertical	96	1.00
5700MHz_TX	Pass	AV	5.6992G	109.16	Inf	-Inf	3	Horizontal	7	1.01
5700MHz_TX	Pass	PK	5.7004G	120.90	Inf	-Inf	3	Horizontal	7	1.01
5700MHz_TX	Pass	PK	5.7252G	64.74	68.20	-3.46	3	Horizontal	7	1.01
5700MHz_TX	Pass	AV	11.40258G	41.65	54.00	-12.35	3	Vertical	28	1.50
5700MHz_TX	Pass	PK	11.40498G	53.43	74.00	-20.57	3	Vertical	28	1.50
5700MHz_TX	Pass	PK	17.08716G	51.53	68.20	-16.67	3	Vertical	0	1.50
5700MHz_TX	Pass	AV	11.40366G	44.58	54.00	-9.42	3	Horizontal	80	1.58
5700MHz_TX	Pass	PK	11.4045G	57.43	74.00	-16.57	3	Horizontal	80	1.58
5700MHz_TX	Pass	PK	17.08974G	52.34	68.20	-15.86	3	Horizontal	64	1.50
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4308G	44.92	54.00	-9.08	3	Vertical	92	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.7188G	96.71	Inf	-Inf	3	Vertical	92	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4584G	56.43	74.00	-17.57	3	Vertical	92	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4668G	56.02	68.20	-12.18	3	Vertical	92	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.72G	106.03	Inf	-Inf	3	Vertical	92	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.9048G	59.03	68.20	-9.17	3	Vertical	92	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4308G	47.72	54.00	-6.28	3	Horizontal	10	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.7188G	108.99	Inf	-Inf	3	Horizontal	10	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4344G	58.61	74.00	-15.39	3	Horizontal	10	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.462G	57.08	68.20	-11.12	3	Horizontal	10	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.7188G	118.83	Inf	-Inf	3	Horizontal	10	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.9636G	59.25	68.20	-8.95	3	Horizontal	10	1.00
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.43982G	42.25	54.00	-11.75	3	Vertical	350	1.50
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.44084G	53.83	74.00	-20.17	3	Vertical	350	1.50
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	17.14938G	52.06	68.20	-16.14	3	Vertical	23	1.54
5720MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.4439G	44.11	54.00	-9.89	3	Horizontal	81	1.58
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.44462G	55.91	74.00	-18.09	3	Horizontal	81	1.58
5720MHz Straddle 5.47-5.725GHz_TX	Pass	PK	17.16174G	51.96	68.20	-16.24	3	Horizontal	24	2.95
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5270MHz_TX	Pass	AV	5.2656G	96.21	Inf	-Inf	3	Vertical	85	3.00
5270MHz_TX	Pass	AV	5.35G	45.68	54.00	-8.32	3	Vertical	85	3.00
5270MHz_TX	Pass	PK	5.2656G	107.95	Inf	-Inf	3	Vertical	85	3.00
5270MHz_TX	Pass	PK	5.352G	58.33	74.00	-15.67	3	Vertical	85	3.00
5270MHz_TX	Pass	AV	5.2688G	104.29	Inf	-Inf	3	Horizontal	175	2.48
5270MHz_TX	Pass	AV	5.35G	49.75	54.00	-4.25	3	Horizontal	175	2.48
5270MHz_TX	Pass	PK	5.2676G	116.03	Inf	-Inf	3	Horizontal	175	2.48
5270MHz_TX	Pass	PK	5.3504G	67.05	74.00	-6.95	3	Horizontal	175	2.48
5270MHz_TX	Pass	AV	15.80172G	41.53	54.00	-12.47	3	Vertical	17	1.26
5270MHz_TX	Pass	PK	10.54744G	53.28	68.20	-14.92	3	Vertical	320	1.50
5270MHz_TX	Pass	PK	15.82044G	53.87	74.00	-20.13	3	Vertical	17	1.26
5270MHz_TX	Pass	AV	15.80124G	41.20	54.00	-12.80	3	Horizontal	54	1.39
5270MHz_TX	Pass	PK	10.54216G	54.28	68.20	-13.92	3	Horizontal	327	1.50
5270MHz_TX	Pass	PK	15.8052G	53.62	74.00	-20.38	3	Horizontal	54	1.39
5310MHz_TX	Pass	AV	5.3048G	91.93	Inf	-Inf	3	Vertical	95	3.00
5310MHz_TX	Pass	AV	5.35G	45.95	54.00	-8.05	3	Vertical	95	3.00

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5310MHz_TX	Pass	PK	5.3028G	103.58	Inf	-Inf	3	Vertical	95	3.00
5310MHz_TX	Pass	PK	5.3564G	58.33	74.00	-15.67	3	Vertical	95	3.00
5310MHz_TX	Pass	AV	5.3088G	101.20	Inf	-Inf	3	Horizontal	172	2.61
5310MHz_TX	Pass	AV	5.35G	52.58	54.00	-1.42	3	Horizontal	172	2.61
5310MHz_TX	Pass	PK	5.308G	112.53	Inf	-Inf	3	Horizontal	172	2.61
5310MHz_TX	Pass	PK	5.3508G	64.70	74.00	-9.30	3	Horizontal	172	2.61
5310MHz_TX	Pass	AV	10.60548G	40.68	54.00	-13.32	3	Vertical	320	1.91
5310MHz_TX	Pass	AV	15.93588G	39.25	54.00	-14.75	3	Vertical	307	2.06
5310MHz_TX	Pass	PK	10.59924G	53.23	68.20	-14.97	3	Vertical	320	1.91
5310MHz_TX	Pass	PK	15.90216G	51.72	74.00	-22.28	3	Vertical	307	2.06
5310MHz_TX	Pass	AV	10.60452G	40.57	54.00	-13.43	3	Horizontal	329	1.69
5310MHz_TX	Pass	AV	15.93756G	39.34	54.00	-14.66	3	Horizontal	313	1.94
5310MHz_TX	Pass	PK	10.60488G	53.21	74.00	-20.79	3	Horizontal	329	1.69
5310MHz_TX	Pass	PK	15.91056G	51.62	74.00	-22.38	3	Horizontal	313	1.94
5510MHz_TX	Pass	AV	5.4596G	45.07	54.00	-8.93	3	Vertical	73	1.00
5510MHz_TX	Pass	AV	5.5088G	94.22	Inf	-Inf	3	Vertical	73	1.00
5510MHz_TX	Pass	PK	5.4144G	57.38	74.00	-16.62	3	Vertical	73	1.00
5510MHz_TX	Pass	PK	5.47G	59.27	68.20	-8.93	3	Vertical	73	1.00
5510MHz_TX	Pass	PK	5.5084G	105.08	Inf	-Inf	3	Vertical	73	1.00
5510MHz_TX	Pass	AV	5.46G	49.38	54.00	-4.62	3	Horizontal	3	1.00
5510MHz_TX	Pass	AV	5.5088G	104.95	Inf	-Inf	3	Horizontal	3	1.00
5510MHz_TX	Pass	PK	5.46G	66.79	74.00	-7.21	3	Horizontal	3	1.00
5510MHz_TX	Pass	PK	5.4696G	67.16	68.20	-1.04	3	Horizontal	3	1.00
5510MHz_TX	Pass	PK	5.5088G	116.84	Inf	-Inf	3	Horizontal	3	1.00
5510MHz_TX	Pass	AV	11.02732G	41.31	54.00	-12.69	3	Vertical	43	1.58
5510MHz_TX	Pass	PK	11.02576G	52.98	74.00	-21.02	3	Vertical	43	1.58
5510MHz_TX	Pass	PK	16.55928G	51.11	68.20	-17.09	3	Vertical	159	1.50
5510MHz_TX	Pass	AV	11.02564G	41.45	54.00	-12.55	3	Horizontal	298	1.54
5510MHz_TX	Pass	PK	11.02888G	53.19	74.00	-20.81	3	Horizontal	298	1.54
5510MHz_TX	Pass	PK	16.50156G	50.95	68.20	-17.25	3	Horizontal	292	2.60
5550MHz_TX	Pass	AV	5.45G	44.69	54.00	-9.31	3	Vertical	86	1.07
5550MHz_TX	Pass	AV	5.5476G	95.11	Inf	-Inf	3	Vertical	86	1.07
5550MHz_TX	Pass	PK	5.4564G	57.84	74.00	-16.16	3	Vertical	86	1.07
5550MHz_TX	Pass	PK	5.468G	57.16	68.20	-11.04	3	Vertical	86	1.07
5550MHz_TX	Pass	PK	5.548G	107.47	Inf	-Inf	3	Vertical	86	1.07
5550MHz_TX	Pass	AV	5.4508G	46.13	54.00	-7.87	3	Horizontal	4	1.00
5550MHz_TX	Pass	AV	5.5488G	106.60	Inf	-Inf	3	Horizontal	4	1.00
5550MHz_TX	Pass	PK	5.45G	58.69	74.00	-15.31	3	Horizontal	4	1.00
5550MHz_TX	Pass	PK	5.4696G	66.34	68.20	-1.86	3	Horizontal	4	1.00
5550MHz_TX	Pass	PK	5.5492G	117.46	Inf	-Inf	3	Horizontal	4	1.00
5550MHz_TX	Pass	AV	11.0886G	40.16	54.00	-13.84	3	Vertical	45	1.55
5550MHz_TX	Pass	PK	11.08836G	52.76	74.00	-21.24	3	Vertical	45	1.55
5550MHz_TX	Pass	PK	16.63764G	52.45	68.20	-15.75	3	Vertical	20	1.44
5550MHz_TX	Pass	AV	11.1042G	41.17	54.00	-12.83	3	Horizontal	299	1.52
5550MHz_TX	Pass	PK	11.10672G	52.63	74.00	-21.37	3	Horizontal	299	1.52
5550MHz_TX	Pass	PK	16.629G	52.71	68.20	-15.49	3	Horizontal	351	1.54
5670MHz_TX	Pass	AV	5.6682G	93.69	Inf	-Inf	3	Vertical	84	1.00
5670MHz_TX	Pass	PK	5.6682G	104.88	Inf	-Inf	3	Vertical	84	1.00
5670MHz_TX	Pass	PK	5.7954G	59.13	68.20	-9.07	3	Vertical	84	1.00
5670MHz_TX	Pass	AV	5.6688G	105.56	Inf	-Inf	3	Horizontal	4	1.00
5670MHz_TX	Pass	PK	5.6688G	115.98	Inf	-Inf	3	Horizontal	4	1.00
5670MHz_TX	Pass	PK	5.7264G	66.85	68.20	-1.35	3	Horizontal	4	1.00
5670MHz_TX	Pass	AV	11.33916G	38.61	54.00	-15.39	3	Vertical	74	1.50
5670MHz_TX	Pass	PK	11.33328G	50.46	74.00	-23.54	3	Vertical	74	1.50
5670MHz_TX	Pass	PK	16.99284G	51.28	68.20	-16.92	3	Vertical	331	1.48
5670MHz_TX	Pass	AV	11.34264G	39.72	54.00	-14.28	3	Horizontal	80	1.61
5670MHz_TX	Pass	PK	11.34312G	52.02	74.00	-21.98	3	Horizontal	80	1.61
5670MHz_TX	Pass	PK	16.99944G	51.25	68.20	-16.95	3	Horizontal	203	2.75
5710MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4196G	44.81	54.00	-9.19	3	Vertical	86	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.7076G	95.17	Inf	-Inf	3	Vertical	86	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4364G	56.55	74.00	-17.45	3	Vertical	86	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4688G	56.27	68.20	-11.93	3	Vertical	86	1.00



RSE TX above 1GHz_Non-Beamforming_O-405E_Full RU

Appendix D.4

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.7076G	107.07	Inf	-Inf	3	Vertical	86	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.9752G	59.35	68.20	-8.85	3	Vertical	86	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4208G	46.57	54.00	-7.43	3	Horizontal	5	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.7088G	106.79	Inf	-Inf	3	Horizontal	5	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4196G	58.75	74.00	-15.25	3	Horizontal	5	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4676G	57.28	68.20	-10.92	3	Horizontal	5	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.7112G	118.22	Inf	-Inf	3	Horizontal	5	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.8588G	59.26	68.20	-8.94	3	Horizontal	5	1.00
5710MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.42036G	39.34	54.00	-14.66	3	Vertical	349	1.46
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.41736G	50.84	74.00	-23.16	3	Vertical	349	1.46
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	17.10588G	50.94	68.20	-17.26	3	Vertical	323	1.50
5710MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.42348G	41.14	54.00	-12.86	3	Horizontal	82	1.56
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.4236G	54.13	74.00	-19.87	3	Horizontal	82	1.56
5710MHz Straddle 5.47-5.725GHz_TX	Pass	PK	17.12016G	51.98	68.20	-16.22	3	Horizontal	330	2.36
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5290MHz_TX	Pass	AV	5.145G	44.99	54.00	-9.01	3	Vertical	86	2.96
5290MHz_TX	Pass	AV	5.286G	90.74	Inf	-Inf	3	Vertical	86	2.96
5290MHz_TX	Pass	AV	5.361G	47.18	54.00	-6.82	3	Vertical	86	2.96
5290MHz_TX	Pass	PK	5.15G	57.57	74.00	-16.43	3	Vertical	86	2.96
5290MHz_TX	Pass	PK	5.285G	103.33	Inf	-Inf	3	Vertical	86	2.96
5290MHz_TX	Pass	PK	5.364G	59.06	74.00	-14.94	3	Vertical	86	2.96
5290MHz_TX	Pass	PK	5.529G	58.25	68.20	-9.95	3	Vertical	86	2.96
5290MHz_TX	Pass	AV	5.149G	45.42	54.00	-8.58	3	Horizontal	173	2.51
5290MHz_TX	Pass	AV	5.289G	98.32	Inf	-Inf	3	Horizontal	173	2.51
5290MHz_TX	Pass	AV	5.35G	53.35	54.00	-0.65	3	Horizontal	173	2.51
5290MHz_TX	Pass	PK	5.147G	57.25	74.00	-16.75	3	Horizontal	173	2.51
5290MHz_TX	Pass	PK	5.291G	109.83	Inf	-Inf	3	Horizontal	173	2.51
5290MHz_TX	Pass	PK	5.351G	64.62	74.00	-9.38	3	Horizontal	173	2.51
5290MHz_TX	Pass	PK	5.479G	58.12	68.20	-10.08	3	Horizontal	173	2.51
5290MHz_TX	Pass	AV	10.60472G	40.35	54.00	-13.65	3	Vertical	320	1.81
5290MHz_TX	Pass	AV	15.85008G	39.37	54.00	-14.63	3	Vertical	11	2.10
5290MHz_TX	Pass	PK	10.56752G	52.98	68.20	-15.22	3	Vertical	320	1.81
5290MHz_TX	Pass	PK	15.88296G	51.76	74.00	-22.24	3	Vertical	11	2.10
5290MHz_TX	Pass	AV	10.60112G	40.21	54.00	-13.79	3	Horizontal	326	1.50
5290MHz_TX	Pass	AV	15.85536G	39.26	54.00	-14.74	3	Horizontal	82	1.50
5290MHz_TX	Pass	PK	10.59992G	52.56	68.20	-15.64	3	Horizontal	326	1.50
5290MHz_TX	Pass	PK	15.8616G	51.31	74.00	-22.69	3	Horizontal	82	1.50
5530MHz_TX	Pass	AV	5.35G	44.71	54.00	-9.29	3	Vertical	68	2.92
5530MHz_TX	Pass	AV	5.46G	45.78	54.00	-8.22	3	Vertical	68	2.92
5530MHz_TX	Pass	AV	5.527G	91.47	Inf	-Inf	3	Vertical	68	2.92
5530MHz_TX	Pass	PK	5.311G	56.81	68.20	-11.39	3	Vertical	68	2.92
5530MHz_TX	Pass	PK	5.361G	57.90	74.00	-16.10	3	Vertical	68	2.92
5530MHz_TX	Pass	PK	5.465G	57.33	68.20	-10.87	3	Vertical	68	2.92
5530MHz_TX	Pass	PK	5.528G	102.52	Inf	-Inf	3	Vertical	68	2.92
5530MHz_TX	Pass	PK	5.751G	59.04	68.20	-9.16	3	Vertical	68	2.92
5530MHz_TX	Pass	AV	5.35G	45.65	54.00	-8.35	3	Horizontal	4	1.01
5530MHz_TX	Pass	AV	5.46G	50.42	54.00	-3.58	3	Horizontal	4	1.01
5530MHz_TX	Pass	AV	5.528G	102.30	Inf	-Inf	3	Horizontal	4	1.01
5530MHz_TX	Pass	PK	5.347G	58.61	68.20	-9.59	3	Horizontal	4	1.01
5530MHz_TX	Pass	PK	5.459G	63.68	74.00	-10.32	3	Horizontal	4	1.01
5530MHz_TX	Pass	PK	5.467G	65.08	68.20	-3.12	3	Horizontal	4	1.01
5530MHz_TX	Pass	PK	5.529G	113.71	Inf	-Inf	3	Horizontal	4	1.01
5530MHz_TX	Pass	PK	5.764G	58.94	68.20	-9.26	3	Horizontal	4	1.01
5530MHz_TX	Pass	AV	11.0264G	39.13	54.00	-14.87	3	Vertical	41	1.64
5530MHz_TX	Pass	PK	11.1164G	50.26	74.00	-23.74	3	Vertical	41	1.64
5530MHz_TX	Pass	PK	16.54128G	50.51	68.20	-17.69	3	Vertical	350	1.50
5530MHz_TX	Pass	AV	11.06624G	39.27	54.00	-14.73	3	Horizontal	297	1.50
5530MHz_TX	Pass	PK	11.06264G	51.24	74.00	-22.76	3	Horizontal	297	1.50
5530MHz_TX	Pass	PK	16.6452G	50.97	68.20	-17.23	3	Horizontal	250	2.19
5610MHz_TX	Pass	AV	5.45G	45.00	54.00	-9.00	3	Vertical	123	1.00
5610MHz_TX	Pass	AV	5.606G	92.49	Inf	-Inf	3	Vertical	123	1.00
5610MHz_TX	Pass	PK	5.391G	57.03	74.00	-16.97	3	Vertical	123	1.00



RSE TX above 1GHz_Non-Beamforming_O-405E_Full RU

Appendix D.4


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5610MHz_TX	Pass	PK	5.469G	56.88	68.20	-11.32	3	Vertical	123	1.00
5610MHz_TX	Pass	PK	5.606G	102.92	Inf	-Inf	3	Vertical	123	1.00
5610MHz_TX	Pass	PK	5.817G	59.27	68.20	-8.93	3	Vertical	123	1.00
5610MHz_TX	Pass	AV	5.45G	47.64	54.00	-6.36	3	Horizontal	9	1.00
5610MHz_TX	Pass	AV	5.608G	103.37	Inf	-Inf	3	Horizontal	9	1.00
5610MHz_TX	Pass	PK	5.448G	60.68	74.00	-13.32	3	Horizontal	9	1.00
5610MHz_TX	Pass	PK	5.468G	62.47	68.20	-5.73	3	Horizontal	9	1.00
5610MHz_TX	Pass	PK	5.607G	114.91	Inf	-Inf	3	Horizontal	9	1.00
5610MHz_TX	Pass	PK	5.725G	65.23	68.20	-2.97	3	Horizontal	9	1.00
5610MHz_TX	Pass	AV	11.2452G	38.66	54.00	-15.34	3	Vertical	346	2.53
5610MHz_TX	Pass	PK	11.21328G	50.39	74.00	-23.61	3	Vertical	346	2.53
5610MHz_TX	Pass	PK	16.8144G	50.63	68.20	-17.57	3	Vertical	71	1.50
5610MHz_TX	Pass	AV	11.24424G	39.32	54.00	-14.68	3	Horizontal	303	1.50
5610MHz_TX	Pass	PK	11.202G	51.02	74.00	-22.98	3	Horizontal	303	1.50
5610MHz_TX	Pass	PK	16.84488G	51.26	68.20	-16.94	3	Horizontal	61	2.63
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4584G	44.82	54.00	-9.18	3	Vertical	66	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.6876G	91.58	Inf	-Inf	3	Vertical	66	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.45G	57.10	74.00	-16.90	3	Vertical	66	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.462G	56.23	68.20	-11.97	3	Vertical	66	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.6876G	102.75	Inf	-Inf	3	Vertical	66	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.9144G	59.80	68.20	-8.40	3	Vertical	66	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.4392G	46.17	54.00	-7.83	3	Horizontal	8	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	5.6888G	103.32	Inf	-Inf	3	Horizontal	8	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.4536G	58.12	74.00	-15.88	3	Horizontal	8	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.468G	58.47	68.20	-9.73	3	Horizontal	8	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.6888G	115.26	Inf	-Inf	3	Horizontal	8	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	5.852G	59.70	68.20	-8.50	3	Horizontal	8	1.00
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.37976G	39.08	54.00	-14.92	3	Vertical	29	1.39
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.33392G	50.62	74.00	-23.38	3	Vertical	29	1.39
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	17.12544G	50.83	68.20	-17.37	3	Vertical	236	1.87
5690MHz Straddle 5.47-5.725GHz_TX	Pass	AV	11.3824G	39.36	54.00	-14.64	3	Horizontal	78	1.68
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	11.36008G	50.79	74.00	-23.21	3	Horizontal	78	1.68
5690MHz Straddle 5.47-5.725GHz_TX	Pass	PK	17.11704G	51.01	68.20	-17.19	3	Horizontal	22	2.36
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.142G	47.71	54.00	-6.29	3	Vertical	105	3.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.2428G	88.78	Inf	-Inf	3	Vertical	105	3.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.3652G	48.65	54.00	-5.35	3	Vertical	105	3.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.1396G	59.59	74.00	-14.41	3	Vertical	105	3.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.244G	100.32	Inf	-Inf	3	Vertical	105	3.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.3532G	61.57	74.00	-12.43	3	Vertical	105	3.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.4696G	57.46	68.20	-10.74	3	Vertical	105	3.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.15G	53.19	54.00	-0.81	3	Horizontal	173	2.07
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.2524G	97.09	Inf	-Inf	3	Horizontal	173	2.07
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	5.3544G	53.61	54.00	-0.39	3	Horizontal	173	2.07
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.1492G	65.91	74.00	-8.09	3	Horizontal	173	2.07
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.2536G	109.32	Inf	-Inf	3	Horizontal	173	2.07
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.3748G	65.35	74.00	-8.65	3	Horizontal	173	2.07
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	5.5104G	58.08	68.20	-10.12	3	Horizontal	173	2.07
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	10.60416G	39.79	54.00	-14.21	3	Vertical	81	2.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	15.7548G	39.21	54.00	-14.79	3	Vertical	207	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	10.58592G	51.34	68.20	-16.86	3	Vertical	81	2.00
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	15.71112G	50.20	74.00	-23.80	3	Vertical	207	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	10.6032G	39.72	54.00	-14.28	3	Horizontal	243	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	AV	15.75624G	38.93	54.00	-15.07	3	Horizontal	360	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	10.62G	50.74	74.00	-23.26	3	Horizontal	243	1.50
5250MHz Straddle 5.25-5.35GHz_TX	Pass	PK	15.79128G	50.35	74.00	-23.65	3	Horizontal	360	1.50
5570MHz_TX	Pass	AV	5.4464G	46.26	54.00	-7.74	3	Vertical	84	1.01
5570MHz_TX	Pass	AV	5.5664G	87.36	Inf	-Inf	3	Vertical	84	1.01
5570MHz_TX	Pass	PK	5.2976G	57.13	68.20	-11.07	3	Vertical	84	1.01
5570MHz_TX	Pass	PK	5.4332G	57.76	74.00	-16.24	3	Vertical	84	1.01
5570MHz_TX	Pass	PK	5.468G	57.59	68.20	-10.61	3	Vertical	84	1.01
5570MHz_TX	Pass	PK	5.5664G	98.31	Inf	-Inf	3	Vertical	84	1.01



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5570MHz_TX	Pass	PK	5.7464G	60.23	68.20	-7.97	3	Vertical	84	1.01
5570MHz_TX	Pass	AV	5.4488G	52.75	54.00	-1.25	3	Horizontal	12	1.00
5570MHz_TX	Pass	AV	5.5676G	98.88	Inf	-Inf	3	Horizontal	12	1.00
5570MHz_TX	Pass	PK	5.3276G	63.57	68.20	-4.63	3	Horizontal	12	1.00
5570MHz_TX	Pass	PK	5.4596G	67.20	74.00	-6.80	3	Horizontal	12	1.00
5570MHz_TX	Pass	PK	5.4608G	67.99	68.20	-0.21	3	Horizontal	12	1.00
5570MHz_TX	Pass	PK	5.5664G	109.98	Inf	-Inf	3	Horizontal	12	1.00
5570MHz_TX	Pass	PK	5.7272G	65.76	68.20	-2.44	3	Horizontal	12	1.00
5570MHz_TX	Pass	AV	11.24944G	40.12	54.00	-13.88	3	Vertical	121	1.14
5570MHz_TX	Pass	PK	11.24608G	52.93	74.00	-21.07	3	Vertical	121	1.14
5570MHz_TX	Pass	PK	16.65672G	50.32	68.20	-17.88	3	Vertical	145	2.29
5570MHz_TX	Pass	AV	11.23648G	40.12	54.00	-13.88	3	Horizontal	311	1.50
5570MHz_TX	Pass	PK	11.24128G	52.65	74.00	-21.35	3	Horizontal	311	1.50
5570MHz_TX	Pass	PK	16.68984G	50.68	68.20	-17.52	3	Horizontal	343	2.48


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

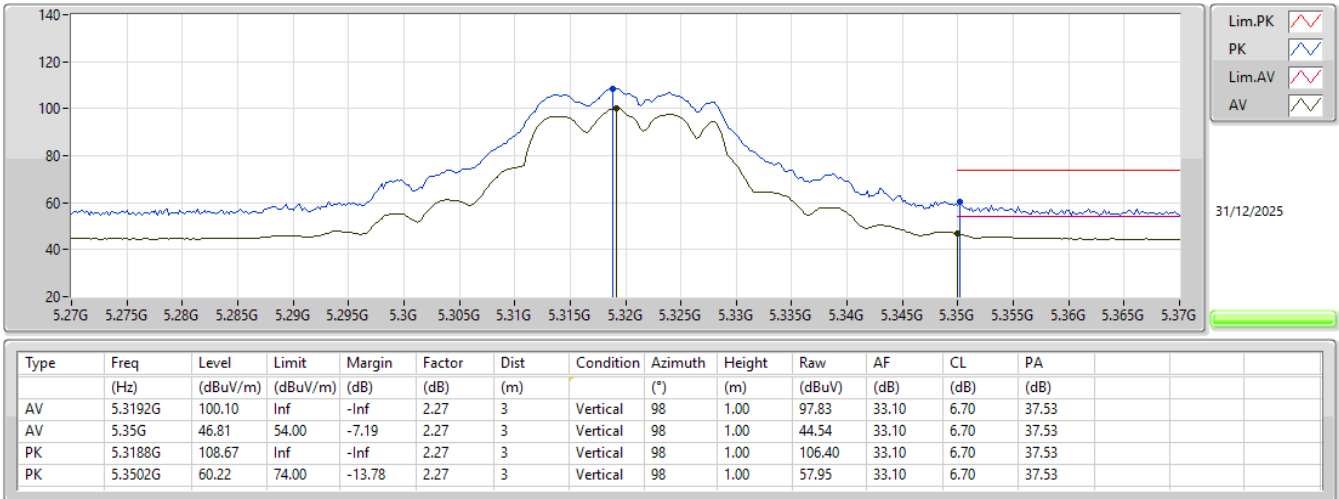


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

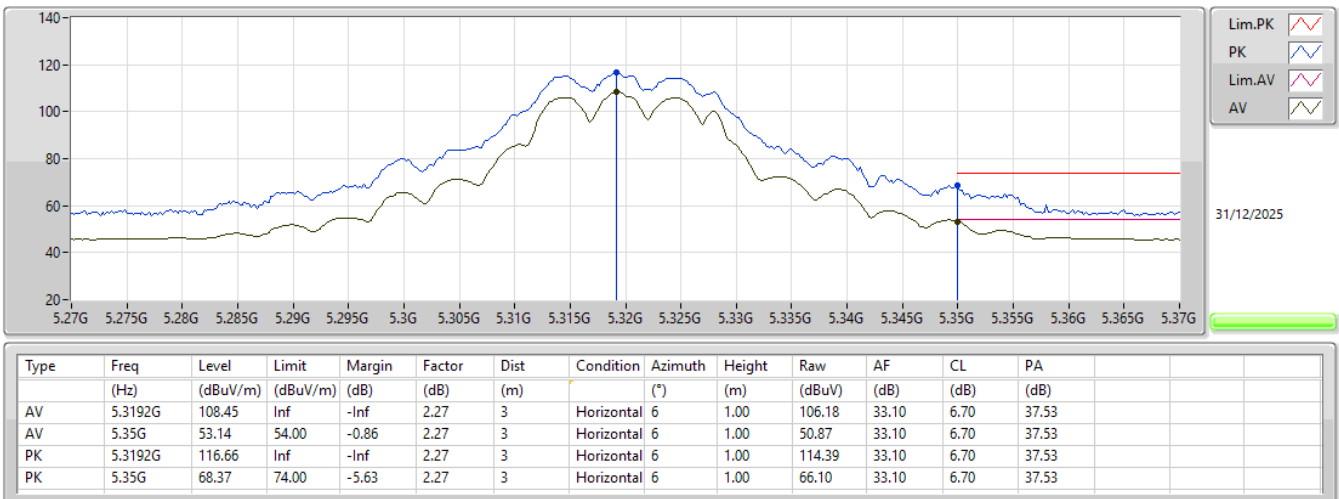


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

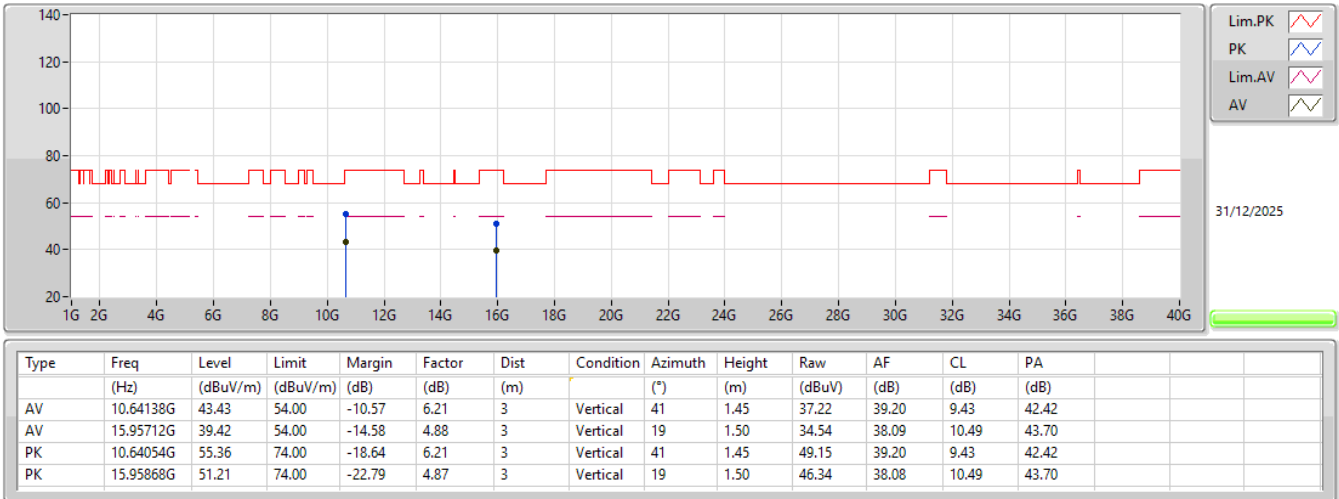


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

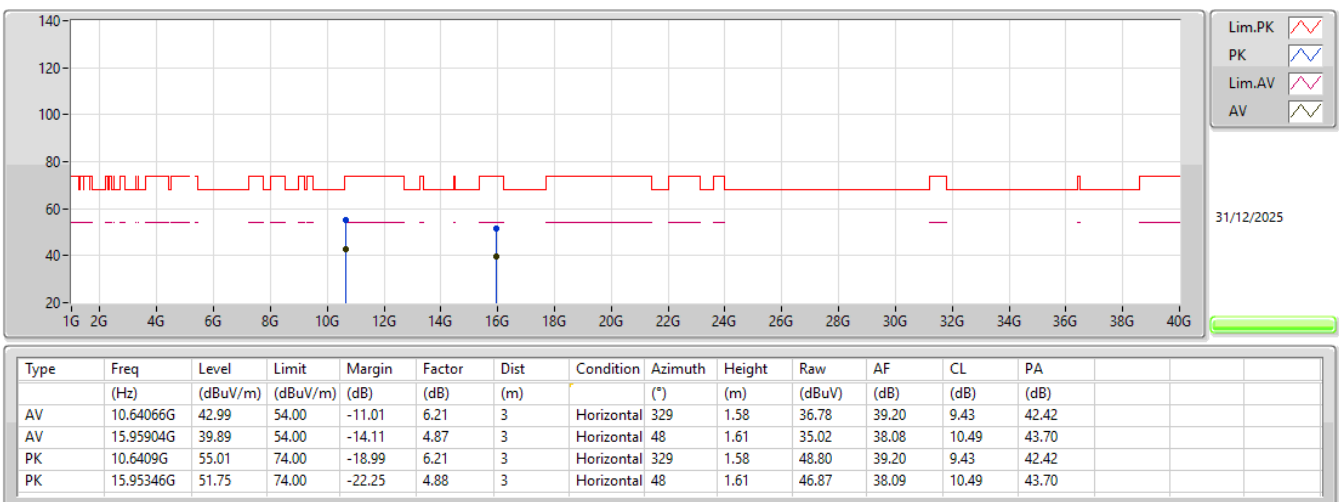


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

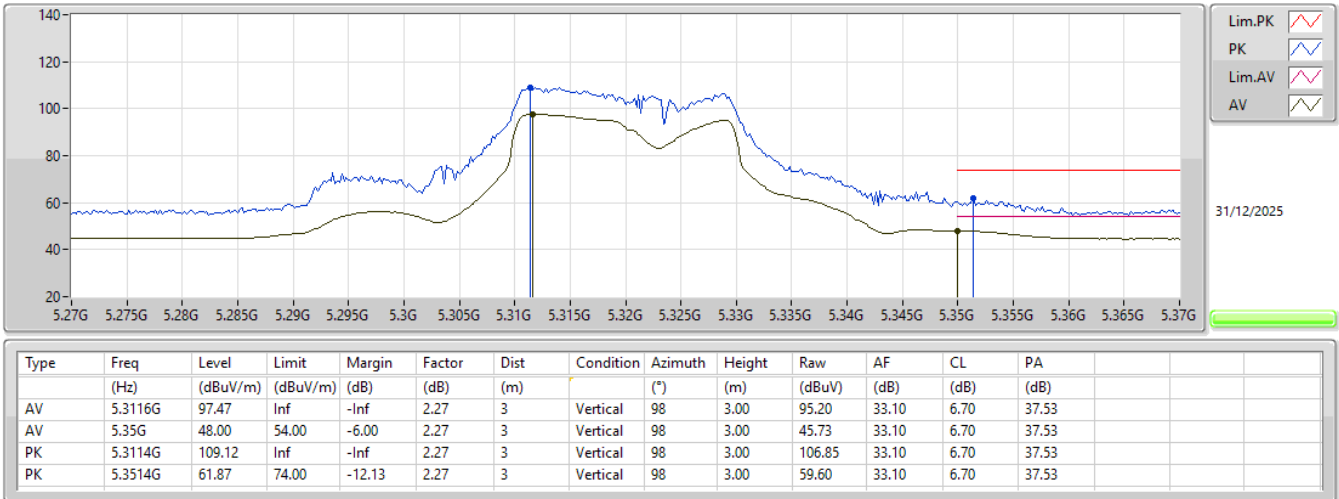


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

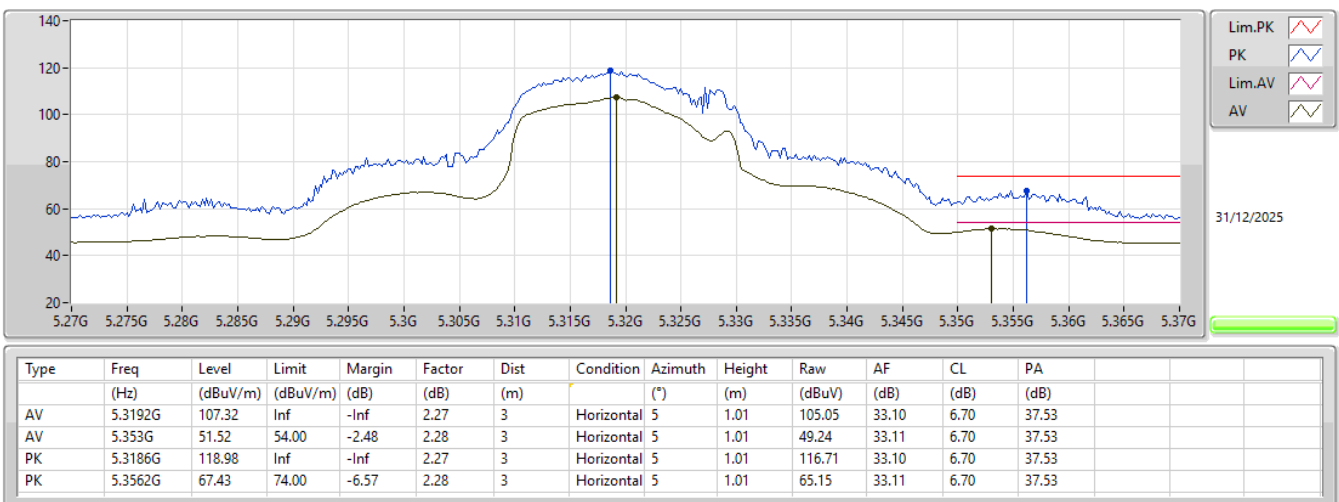


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

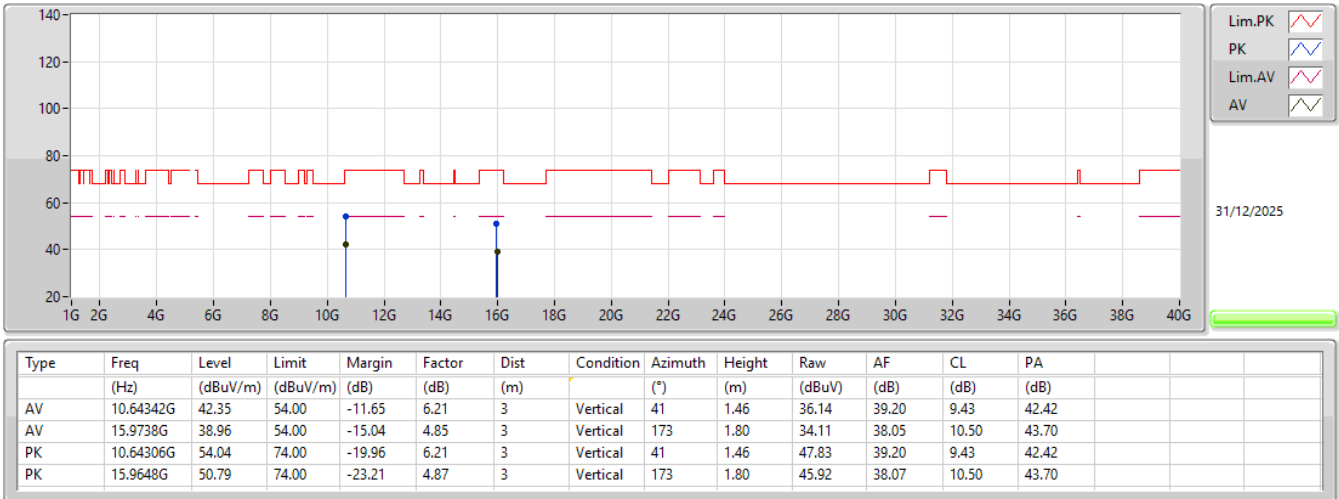


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

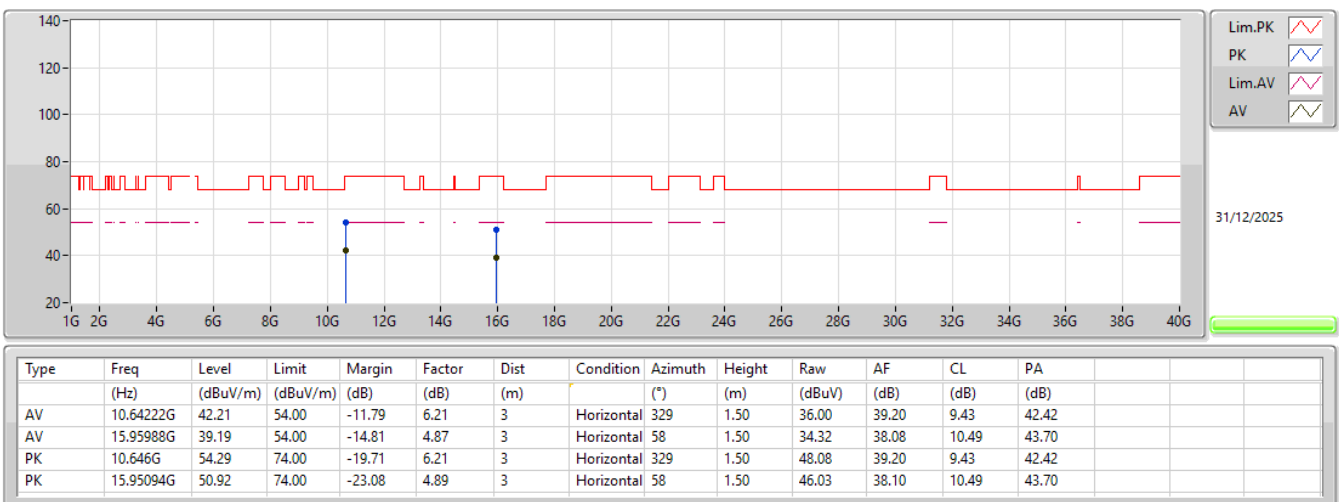

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

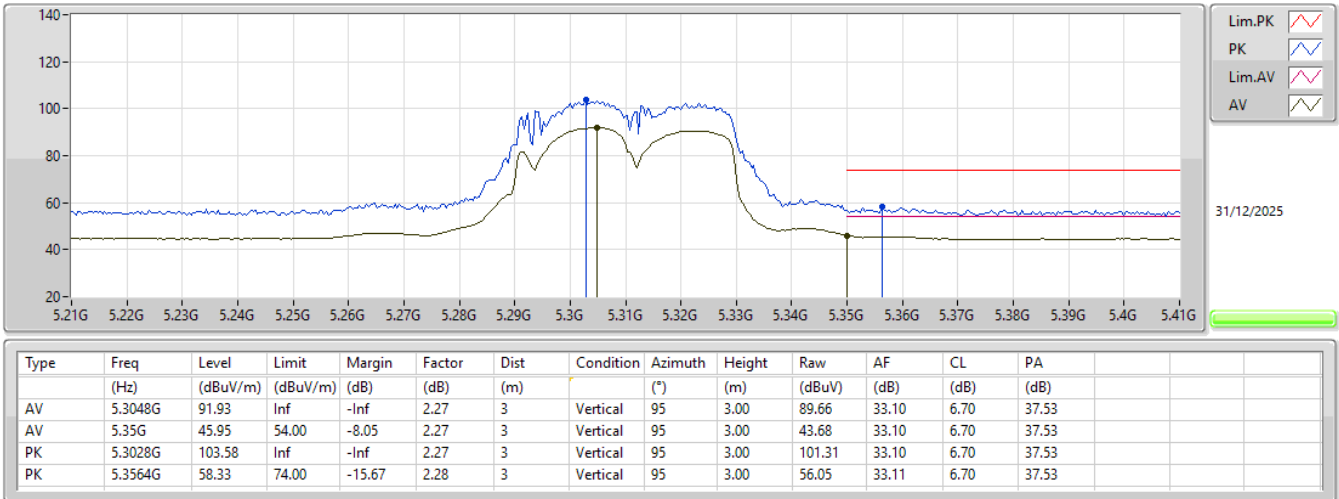

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

