



FCC RADIO TEST REPORT

FCC ID : TOR-O405
Equipment : Wireless Access Point
Brand Name : ARISTA
Model Name : O-405 / O-405E
Applicant : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA
95054 USA
Manufacturer : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA
95054 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Jul. 21, 2025, and testing was started from Jan. 03, 2026 and completed on Jan. 31, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.



Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	14
1.3 Testing Location Information	14
1.4 Measurement Uncertainty	15
2 Test Configuration of EUT	16
2.1 Test Channel Mode	16
2.2 The Worst Case Measurement Configuration	21
2.3 Accessories	22
2.4 Support Equipment.....	22
2.5 Test Setup Diagram	23
3 Transmitter Test Result	24
3.1 AC Power-line Conducted Emissions	24
3.2 Emission Bandwidth	26
3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	27
3.4 Peak Power Spectral Density (E.I.R.P.)	29
3.5 Unwanted Emissions.....	32
4 Test Equipment and Calibration Data	37
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Radiated Emission Co-location	
Appendix G. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: HE1-D1-1 Ver2.8
FCC ID: TOR-O405

Page Number : 3 of 39
Issued Date : Jun. 26, 2026
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
0	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
-	15.407(d)	Contention-Based Protocol	N/A	Standard Power AP w/o test

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Barry Hsiao

Report Producer: Debby Hung



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 6425	ax (HEW20),be (EHT20)	5955 ~ 6415	1 ~ 93 [24]
6525 ~ 6875		6535 ~ 6855	117 ~ 181 [17]
5925 ~ 6425	ax (HEW40),be (EHT40)	5965 ~ 6405	3 ~ 91 [12]
6525 ~ 6875		6565 ~ 6845	123 ~ 179 [8]
5925 ~ 6425	ax (HEW80),be (EHT80)	5985 ~ 6385	7 ~ 87 [6]
6525 ~ 6875		6625 ~ 6785	135 ~ 167 [3]
5925 ~ 6425	ax (HEW160), be (EHT160)	6025 ~ 6345	15 ~ 79 [3]
6525 ~ 6875		6665	143 [1]
5925 ~ 6425	be (EHT320)	6105 ~ 6265	31~63 [2]

Non-Beamforming_Full RU_O-405

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT20	20	2TX
6.525-6.875GHz	802.11be EHT20	20	2TX
5.925-6.425GHz	802.11be EHT40	40	2TX
6.525-6.875GHz	802.11be EHT40	40	2TX
5.925-6.425GHz	802.11be EHT80	80	2TX
6.525-6.875GHz	802.11be EHT80	80	2TX
5.925-6.425GHz	802.11be EHT160	160	2TX
6.525-6.875GHz	802.11be EHT160	160	2TX
5.925-6.425GHz	802.11be EHT320	320	2TX

Non-Beamforming_Multi-RU_O-405

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT80	80	2TX
5.925-6.425GHz	802.11be EHT160	160	2TX
5.925-6.425GHz	802.11be EHT320	320	2TX

Non-Beamforming_Puncturing_O-405

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT80	80	2TX
5.925-6.425GHz	802.11be EHT160	160	2TX
5.925-6.425GHz	802.11be EHT320	320	2TX

**Non-Beamforming_Full RU_O-405E**

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT20	20	2TX
6.525-6.875GHz	802.11be EHT20	20	2TX
5.925-6.425GHz	802.11be EHT40	40	2TX
6.525-6.875GHz	802.11be EHT40	40	2TX
5.925-6.425GHz	802.11be EHT80	80	2TX
6.525-6.875GHz	802.11be EHT80	80	2TX
5.925-6.425GHz	802.11be EHT160	160	2TX
6.525-6.875GHz	802.11be EHT160	160	2TX
5.925-6.425GHz	802.11be EHT320	320	2TX

Non-Beamforming_Multi-RU_O-405E

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT80	80	2TX
6.525-6.875GHz	802.11be EHT80	80	2TX
5.925-6.425GHz	802.11be EHT160	160	2TX
6.525-6.875GHz	802.11be EHT160	160	2TX
5.925-6.425GHz	802.11be EHT320	320	2TX

Non-Beamforming_Puncturing_O-405E

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT80	80	2TX
6.525-6.875GHz	802.11be EHT80	80	2TX
5.925-6.425GHz	802.11be EHT160	160	2TX
6.525-6.875GHz	802.11be EHT160	160	2TX
5.925-6.425GHz	802.11be EHT320	320	2TX

Beamforming_Full RU

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT20-BF	20	2TX
6.525-6.875GHz	802.11be EHT20-BF	20	2TX
5.925-6.425GHz	802.11be EHT40-BF	40	2TX
6.525-6.875GHz	802.11be EHT40-BF	40	2TX
5.925-6.425GHz	802.11be EHT80-BF	80	2TX
6.525-6.875GHz	802.11be EHT80-BF	80	2TX
5.925-6.425GHz	802.11be EHT160-BF	160	2TX
6.525-6.875GHz	802.11be EHT160-BF	160	2TX
5.925-6.425GHz	802.11be EHT320-BF	320	2TX

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80, EHT160 and EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.
- The channel defined in the IEEE Standard P802.11ax™/D6.1.
- Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

1.1.2 MRU (static preamble puncturing)

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)		6GHz Test CH	
		80		CH7	CH215
484+242	1	242	484	--	V
	2	242	484	V	V
	3	484	242	V	V
	4	484	242	V	--

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)		6GHz Test CH	
		160		CH15	CH207
996+484	1	484	996	--	V
	2	484	996	V	V
	3	996	484	V	V
	4	996	484	V	--
996+484+242	1	242	484	996	--
	2	242	484	996	V
	3	484	242	996	V
	4	484	242	996	V
	5	996	242	484	V
	6	996	242	484	V
	7	996	484	242	V
	8	996	484	242	--

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)		6GHz Test CH	
		320		CH31	CH191
2x996+484	1	484	996	--	--
	2	484	996	V	--
	3	996	484	V	--
	4	996	484	V	--
	5	996	996	V	--
	6	996	996	V	--
	7	484	996	--	V
	8	484	996	--	V
	9	996	484	--	V
	10	996	484	--	V
	11	996	996	--	V
	12	996	996	--	--
3x996	1	996	996	--	V
	2	996	996	V	V
	3	996	996	V	V
	4	996	996	V	V
3x996+484	1	484	996	--	V
	2	484	996	V	V
	3	996	484	V	V
	4	996	484	V	V
	5	996	996	V	V
	6	996	996	V	V
	7	996	996	V	V
	8	996	996	V	--

**1.1.3 Worst case of MRU (static preamble puncturing) evaluation procedure**

1. Complete test Full RU BE & PSD
2. Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration
4. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated PSD testing
5. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated unwanted emission testing
6. Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 2 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU(static preamble puncturing) needs to be retested.
7. Use worst configuration of MRU(static preamble puncturing) and perform MASK measurements by conducted method .

**1.1.4 Antenna Information****O-405**

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	VVDN	401-1-03634	PCBA Antenna	I-Pex	2.4G/5G	Radio1/2
2	VVDN	401-1-03634	PCBA Antenna	I-Pex	2.4G/5G	Radio1/2
3	VVDN	401-1-03635	PCBA Antenna	I-Pex	6G	Radio 3
4	VVDN	401-1-03635	PCBA Antenna	I-Pex	6G	Radio 3
5	VVDN	601-1-16517	Metal Stamp Antenna	I-Pex	GPS	-

Ant.	Port	Gain (dBi)									
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	GPS
1	1	6.16	5.7	5.71	5.55	3.97	-	-	-	-	-
2	2	6	5.45	4.84	4.47	4.08	-	-	-	-	-
3	1	-	-	-	-	-	5.02	5.57	5.2	6.28	-
4	2	-	-	-	-	-	3.49	3.75	4.73	5.08	-
5	1	-	-	-	-	-	-	-	-	-	3

Composite Gain (dBi)											
Ant.		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	
1~2	DG [1SS]	8.99	7.58	7.76	6.98	6.41	-	-	-	-	-
	DG [2SS]	6.16	5.7	5.71	5.55	4.08	-	-	-	-	-
3~4	DG [1SS]	-	-	-	-	-	6.56	7.45	7.29	8.39	
	DG [2SS]	-	-	-	-	-	5.02	5.57	5.2	6.28	

Note 1: The composite gain is derived as KDB 662911 D03 v01 which was used as directional gain. For more detail information, please refer to the Antenna Pattern Report AP571016.

Note 2: The EUT has Five antennas.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) < **Radio 1** >

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode(2TX/2RX) < **Radio 2** >

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be mode(2TX/2RX) < **Radio 3** >

Ant. 3 (port 1) and Ant. 4 (port 2) could transmit/receive simultaneously.



O-405E

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	M-Gear	401-1-03626	Omni-Directional Antenna	N-type	2.4G/5G/6G	Radio1/2/3
2	M-Gear	401-1-03626	Omni-Directional Antenna	N-type	2.4G/5G/6G	Radio1/2/3
3	VVDN	601-1-16517	Metal Stamp Antenna	I-Pex	GPS	-

Ant.	Port	Gain (dBi)									
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	GPS
1	1	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	-
2	2	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	-
3	1	-	-	-	-	-	-	-	-	-	3

Note 3: The EUT has Three antennas.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) < Radio 1>

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode(2TX/2RX) < Radio 2 >

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be mode(2TX/2RX) < Radio 3>

Ant. 1 (port 1) and Ant.2 (port 2) could transmit/receive simultaneously.

Note 4: Directional gain information

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{IS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{IS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{IS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

**1.1.5 EUT Information**

Operational Condition			
EUT Power Type	From PoE		
EUT Function	☐	Indoor Access Point	☐ Dual Client
	☐	Indoor Client	☐ Fixed Client
	☐	Subordinate	☐ Standard Client
	☐	Very Low Power	☒ Standard Power Access Point
			☐ Indoor use
			☒ Outdoor use
Beamforming Function	☒	With beamforming	☐ Without beamforming
Resource Unit	☒	Full RU	☐ Partial RU
	☒	MRU	
Channel Puncturing	☒	Supported	☐ Unsupported
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:		...
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

Note: The above information was declared by manufacturer.

**1.1.6 Mode Test Duty Cycle****Non-Beamforming_Full RU_O-405**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT160_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT320_Nss1,(MCS0)_2TX	0.997	0.01	5.458m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Multi-RU_O-405

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	0.894	0.49	2.747m	500
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	0.711	1.48	1.422m	1k
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	0.945	0.25	5.173m	200

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Puncturing_O-405

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	0.997	0.01	5.453m	10
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX	0.997	0.01	5.458m	10
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	0.997	0.01	5.458m	10
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_2TX	0.997	0.01	5.458m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Full RU_O-405E

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20_Nss1,(MCS0)_2TX	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT160_Nss1,(MCS0)_2TX	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT320_Nss1,(MCS0)_2TX	0.996	0.02	5.457m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

**Non-Beamforming_Multi-RU_O-405E**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	0.894	0.49	2.747m	500
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	0.891	0.5	2.747m	500
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	0.711	1.48	1.422m	1k
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	0.888	0.52	2.763m	500
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	0.712	1.48	1.422m	1k
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	0.688	1.62	1.434m	1k
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX	0.714	1.46	1.43m	1k
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	0.945	0.25	5.173m	200

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Puncturing_O-405E

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	0.997	0.01	5.453m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX	0.997	0.01	5.455m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	0.997	0.01	5.453m	10
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	0.997	0.01	5.458m	10
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX	0.997	0.01	5.458m	10
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_2TX	0.997	0.01	5.458m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming_Full RU_O-405

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT320-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.458m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming_Full RU_O-405E

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT320-BF_Nss1,(MCS0)_2TX	0.996	0.02	5.457m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

**1.1.7 Table for Multiple Listing**

Model Name	Description
O-405	Wi-Fi Internal Antenna
O-405E	Wi-Fi External Antenna

1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 987594 D01 v03r01
- ♦ KDB 987594 D02 v03
- ♦ KDB 662911 D01 v02r01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Lego Lin	17.3~18.5°C / 58~62%	31/Jan/2026
☒ Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	TEL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH06-HY	Wayne Chiu	22.8~23.6°C / 51~57%	07/Jan/2026~17/Jan/2026
Radiated_O-405 Full RU	03CH26-HY	Ivan Chung	22.1~23.2°C / 50~54%	03/Jan/2026~06/Jan/2026
Radiated_O-405 (MRU+PUN)	03CH25-HY	Rian Chung	19.7~22.1°C / 51~55%	28/Jan/2026~29/Jan/2026
Radiated_O-405E Full RU	03CH25-HY	Rian Chung	20.1~22.5°C / 50~54%	06/Jan/2026~07/Jan/2026
Radiated_O-405E (MRU+PUN)	03CH25-HY	Rian Chung	20.5~22.9°C / 52~55%	23/Jan/2026~27/Jan/2026
Radiated_O-405 (Co-location)	03CH26-HY	Ivan Chung	22.8~23.2°C / 53~54%	06/Jan/2026
Radiated_O-405E (Co-location)	03CH25-HY	Rian Chung	19.8~22.1°C / 53~54%	06/Jan/2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	3.44 dB	Confidence levels of 95%
Emission Bandwidth	0.05 MHz	Confidence levels of 95%
Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	1.48 dB	Confidence levels of 95%
Peak Power Spectral Density (E.I.R.P.)	1.48 dB	Confidence levels of 95%
Contention-Based Protocol	0.94 dB	Confidence levels of 95%
Radiated Emission (9 kHz ~ 30 MHz)	2.9 dB	Confidence levels of 95%
Radiated Emission (30 MHz ~ 1 GHz)	5.64 dB	Confidence levels of 95%
Radiated Emission (1 GHz ~ 18 GHz)	5.02 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	5.28 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	Qdart_conn.win.1.0_installer_00099
-----------------------	------------------------------------

Non-Beamforming_Full RU_O-405

Mode	Power Setting
802.11be EHT20_Nss1,(MCS0)_2TX	-
5955MHz	17.5
6195MHz	13.5
6415MHz	15
6535MHz	16.5
6695MHz	17
6855MHz	14.5
802.11be EHT40_Nss1,(MCS0)_2TX	-
5965MHz	17.5
6205MHz	13.5
6405MHz	15.5
6565MHz	16.5
6685MHz	17.5
6845MHz	15.5
802.11be EHT80_Nss1,(MCS0)_2TX	-
5985MHz	17.5
6225MHz	14.5
6385MHz	15.5
6625MHz	18.5
6705MHz	17.5
6785MHz	16
802.11be EHT160_Nss1,(MCS0)_2TX	-
6025MHz	17
6185MHz	14.5
6345MHz	16.5
6665MHz	18.5
802.11be EHT320_Nss1,(MCS0)_2TX	-
6105MHz	16
6265MHz	15.5

**Non-Beamforming_Multi-RU_O-405**

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-
5985MHz	16.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-
6025MHz	16.5
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-
6105MHz	15.5

Non-Beamforming_Puncturing_O-405

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-
5985MHz	16.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	-
6025MHz	17
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-
6025MHz	16.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX	-
6105MHz	16
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	-
6105MHz	15.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_2TX	-
6105MHz	14.5

Non-Beamforming_Full RU_O-405E

Mode	Power Setting
802.11be EHT20_Nss1,(MCS0)_2TX	-
5955MHz	20.5
6195MHz	18.5
6415MHz	18
6535MHz	18.5
6695MHz	16.5
6855MHz	14.5
802.11be EHT40_Nss1,(MCS0)_2TX	-
5965MHz	19.5
6205MHz	20
6405MHz	18
6565MHz	18.5
6685MHz	17
6845MHz	14.5
802.11be EHT80_Nss1,(MCS0)_2TX	-
5985MHz	19.5
6225MHz	20.5



6385MHz	19.5
6625MHz	18.5
6705MHz	17
6785MHz	17
802.11be EHT160_Nss1,(MCS0)_2TX	-
6025MHz	18.5
6185MHz	19
6345MHz	18.5
6665MHz	18
802.11be EHT320_Nss1,(MCS0)_2TX	-
6105MHz	18.5
6265MHz	19

Non-Beamforming_Multi-RU_O-405E

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-
5985MHz	18.5
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-
5985MHz	17
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-
6025MHz	17.5
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-
6025MHz	17
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-
6025MHz	16
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-
6105MHz	18
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX	-
6105MHz	17
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-
6105MHz	17.5

**Non-Beamforming_Puncturing_O-405E**

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-
5985MHz	18
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX	-
6025MHz	18
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-
6025MHz	17.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	-
6105MHz	18.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX	-
6105MHz	18
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_2TX	-
6105MHz	17

Beamforming_Full RU_O-405

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-
5955MHz	17.5
6195MHz	13.5
6415MHz	15
6535MHz	16.5
6695MHz	17
6855MHz	14.5
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-
5965MHz	17.5
6205MHz	13.5
6405MHz	15.5
6565MHz	16.5
6685MHz	17.5
6845MHz	15.5
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-
5985MHz	17.5
6225MHz	14.5
6385MHz	15.5
6625MHz	18.5
6705MHz	17.5
6785MHz	16
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-
6025MHz	17
6185MHz	14.5
6345MHz	16.5



6665MHz	18.5
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-
6105MHz	16
6265MHz	15.5

Beamforming_Full RU_O-405E

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-
5955MHz	20.5
6195MHz	18.5
6415MHz	18
6535MHz	18.5
6695MHz	16.5
6855MHz	14.5
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-
5965MHz	19.5
6205MHz	20
6405MHz	18
6565MHz	18.5
6685MHz	17
6845MHz	14.5
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-
5985MHz	19.5
6225MHz	20.5
6385MHz	19.5
6625MHz	18.5
6705MHz	17
6785MHz	17
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-
6025MHz	18.5
6185MHz	19
6345MHz	18.5
6665MHz	18
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-
6105MHz	18.5
6265MHz	19

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	PoE Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Unwanted Emissions Frequency Stability
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
1	PoE Mode
Operating Mode > 1GHz	CTX
Orthogonal Planes of EUT	Y Plane
	
Worst Planes of EUT	V

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	CTX
1	WLAN 2.4G+WLAN 5G+ WLAN 6G
Refer to Sporton Test Report No.: FA571016-01 for Co-location RF Exposure Evaluation and Appendix F for Radiated Emission Co-location.	



2.3 Accessories

Accessories				
Pole mount 1	Brand Name	ARISTA	Model Name	M/E KIT ASSY (BRACKET)
Pole mount 2	Brand Name	ARISTA	Model Name	M/E KIT ASSY (Cable ties)

Reminder: Regarding to more detail and other information, please refer to user manual.

2.4 Support Equipment


Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 cable	Power sync	CAT-6E-03	-	-
2	AC Power Cable	Power sync	PW-GPC180-3	-	-
3	PoE	PHIHONG	POE90U-BTA	-	-

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	PoE	PHIHONG	POE90U-BTA	-	Provided by Customer

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 cable	Power sync	CAT-6E-03	-	-
2	AC Power Cable	Power sync	PW-GPC180-3	-	-
3	PoE	PHIHONG	POE90U-BTA	-	Provided by Customer


2.5 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

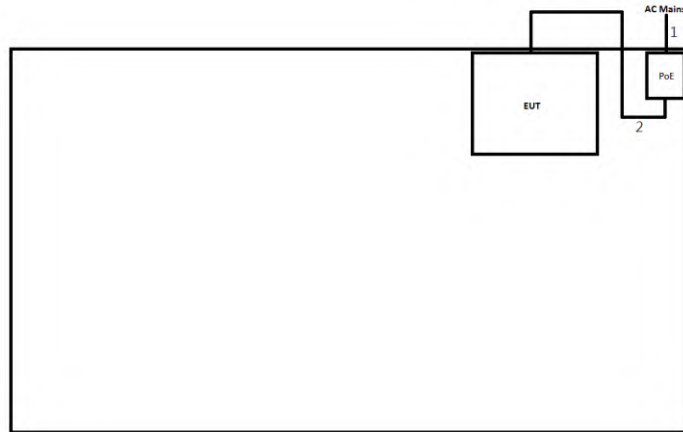

Item	Connection	Shielded	Length(m)	Remark
1	AC Power Cable	No	1.0	-
2	RJ45 cable	No	3.0	-

Test Setup Diagram - Radiated Test

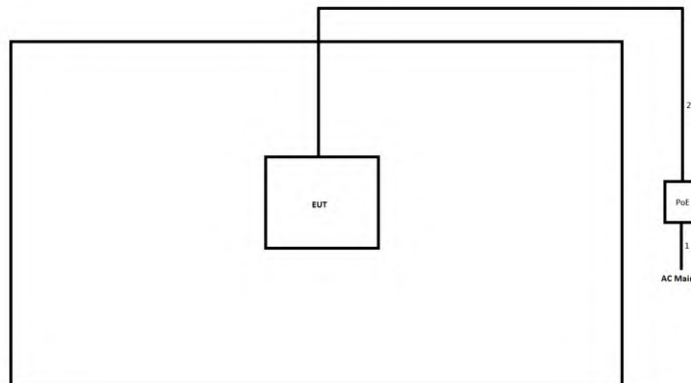

Item	Connection	Shielded	Length(m)	Remark
1	AC Power Cable	No	1.0	-
2	RJ45 cable	No	3.0	-



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

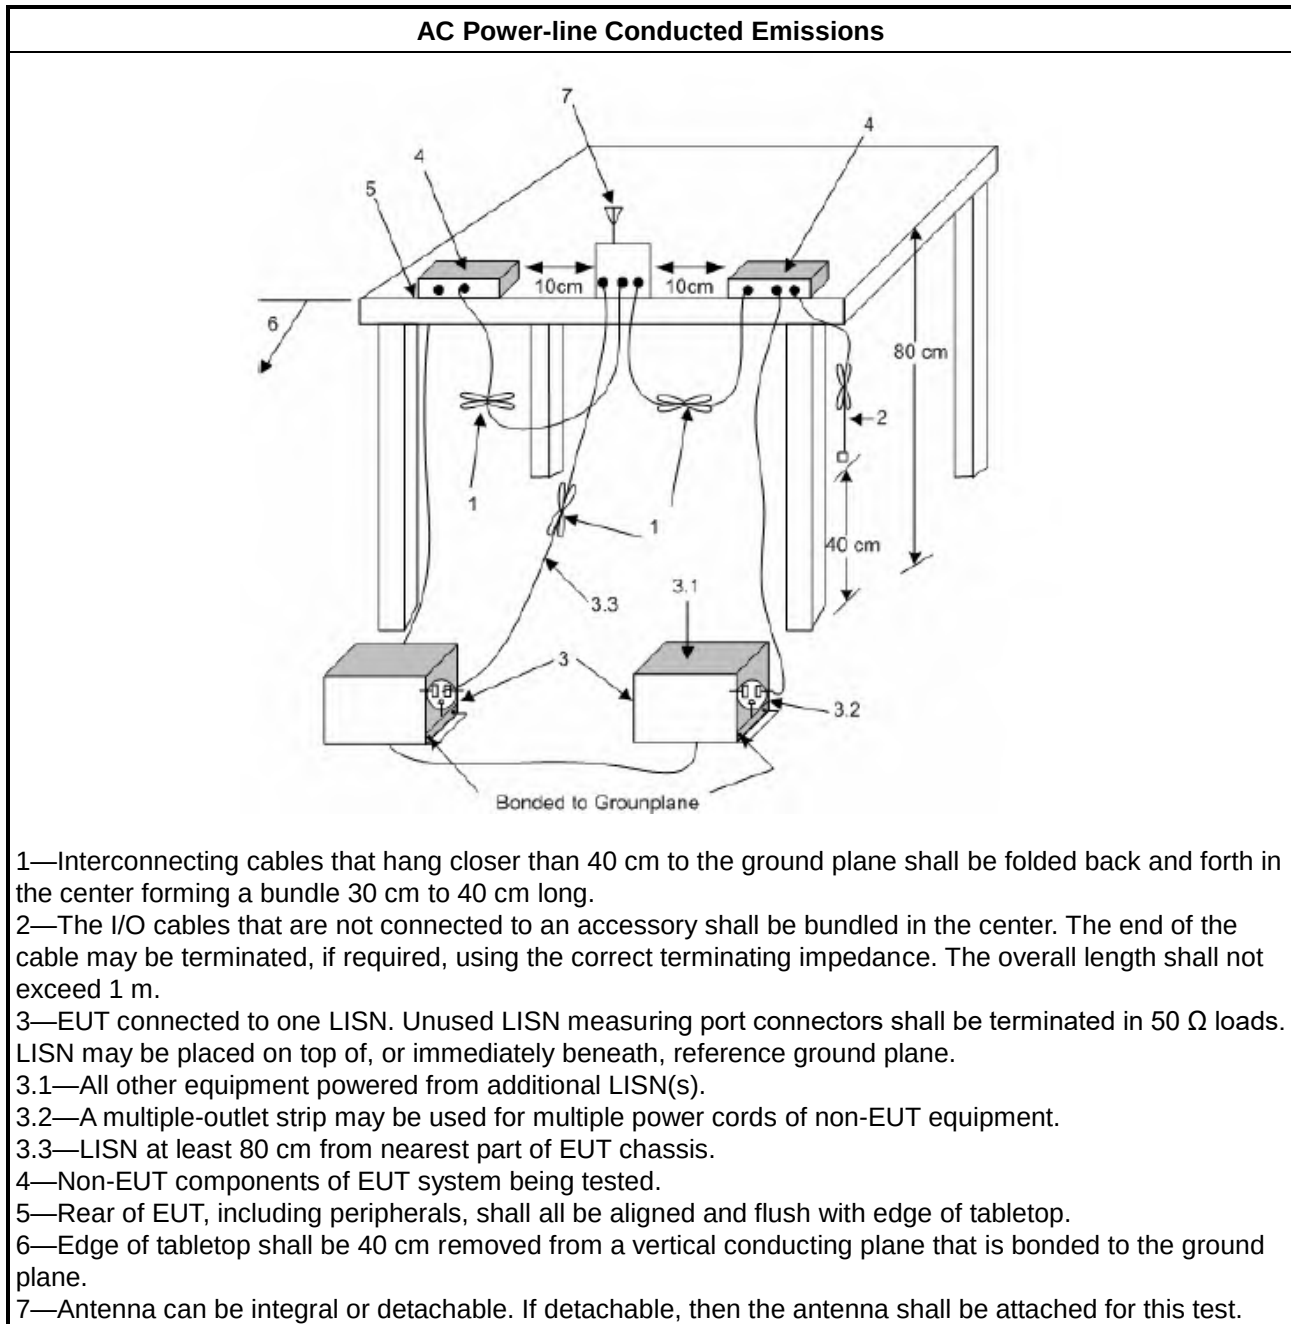

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, N/A
☐	For the 6425-6525 GHz band, N/A
☒	For the 6525-6875 GHz band, N/A
☐	For the 6875-7125 GHz band, N/A


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

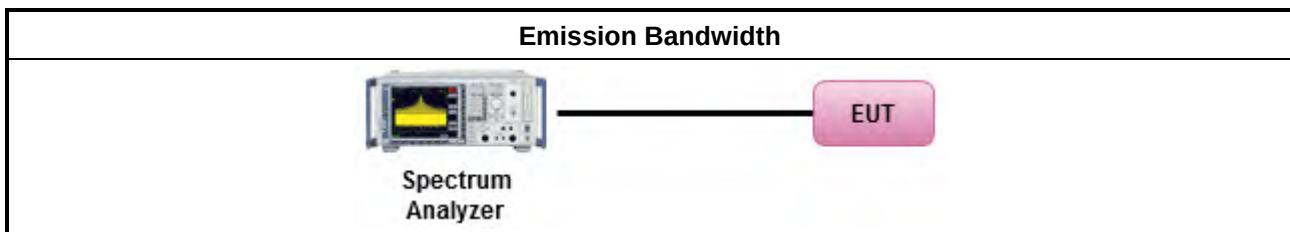

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Output Power Setting	
	Duty cycle $\geq 98\%$
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
	- Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as KDB 412172, clause 2.2 for EIRP calculation.

3.3.4 Test Setup

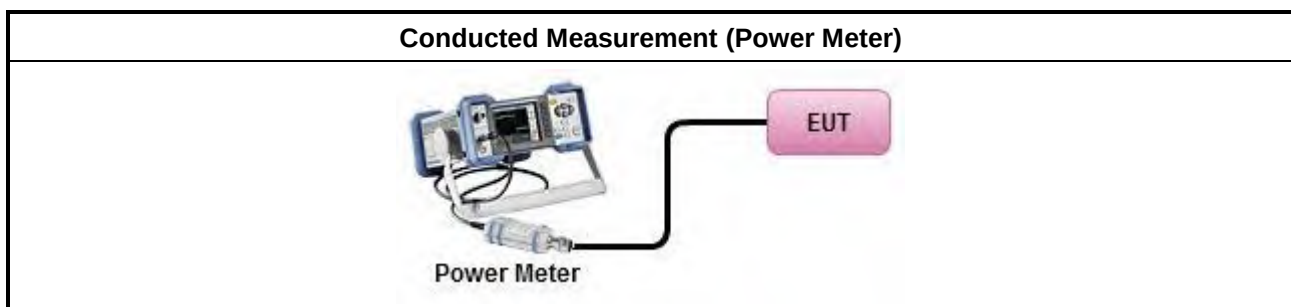

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.4.3 Test Procedures**

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
☒	Refer as FCC KDB 789033, clause E Method SA-2. (spectral trace averaging)
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☒	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☒	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐ For radiated measurement.	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as KDB 412172, clause 2.2 for EIRP calculation.	

3.4.4 Test Setup

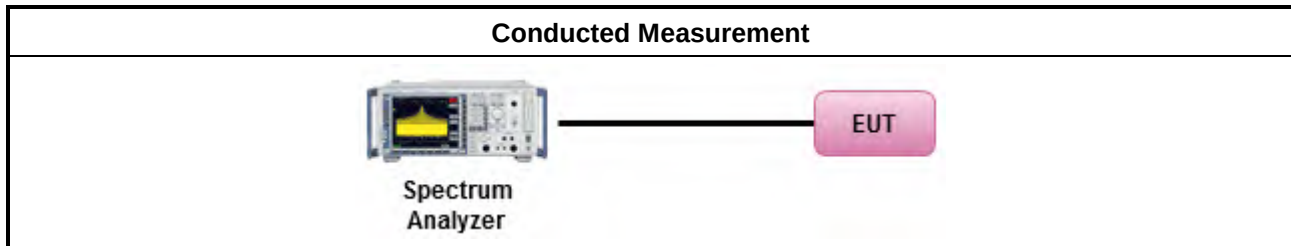

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3


Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m.
Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the

limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. The channel bandwidth is defined as 26 dB EBW.

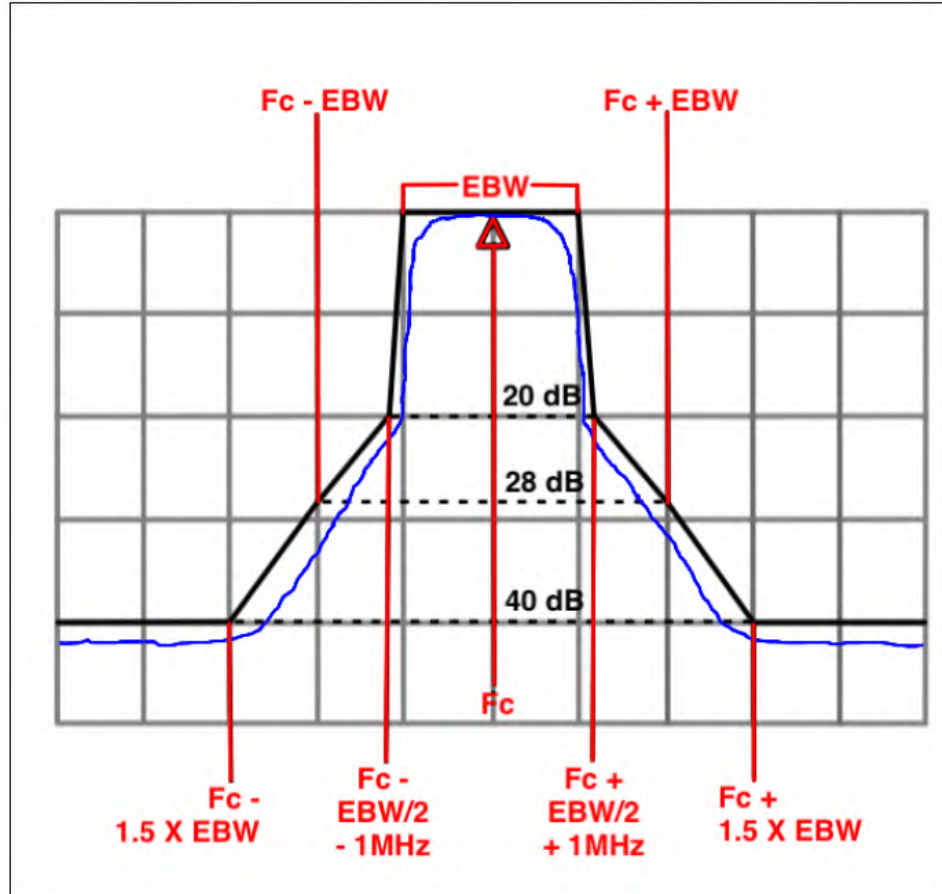



3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.5.2.2 measurement procedure peak limit.
	☒ Refer as FCC KDB 789033, clause G)3)d)ii) for Band edge Integration measurements.
For emission MASK shall be measured using following options below:	
	☒ Refer as KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	


Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.5.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamp Factor)

3.5.5 Test Setup

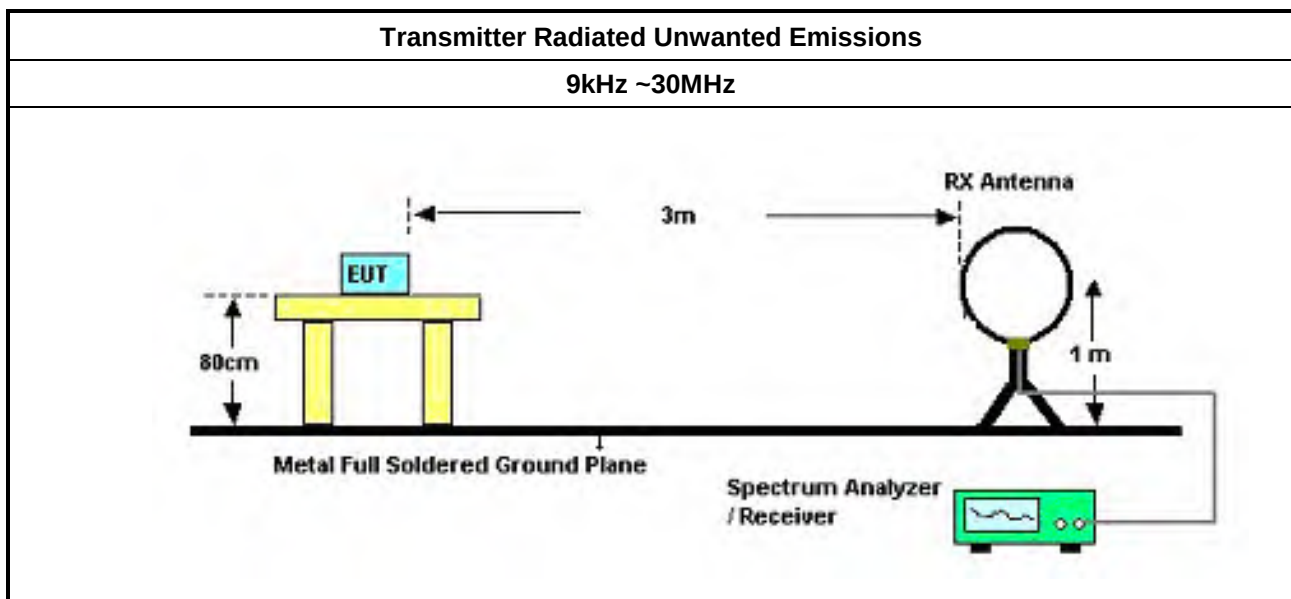

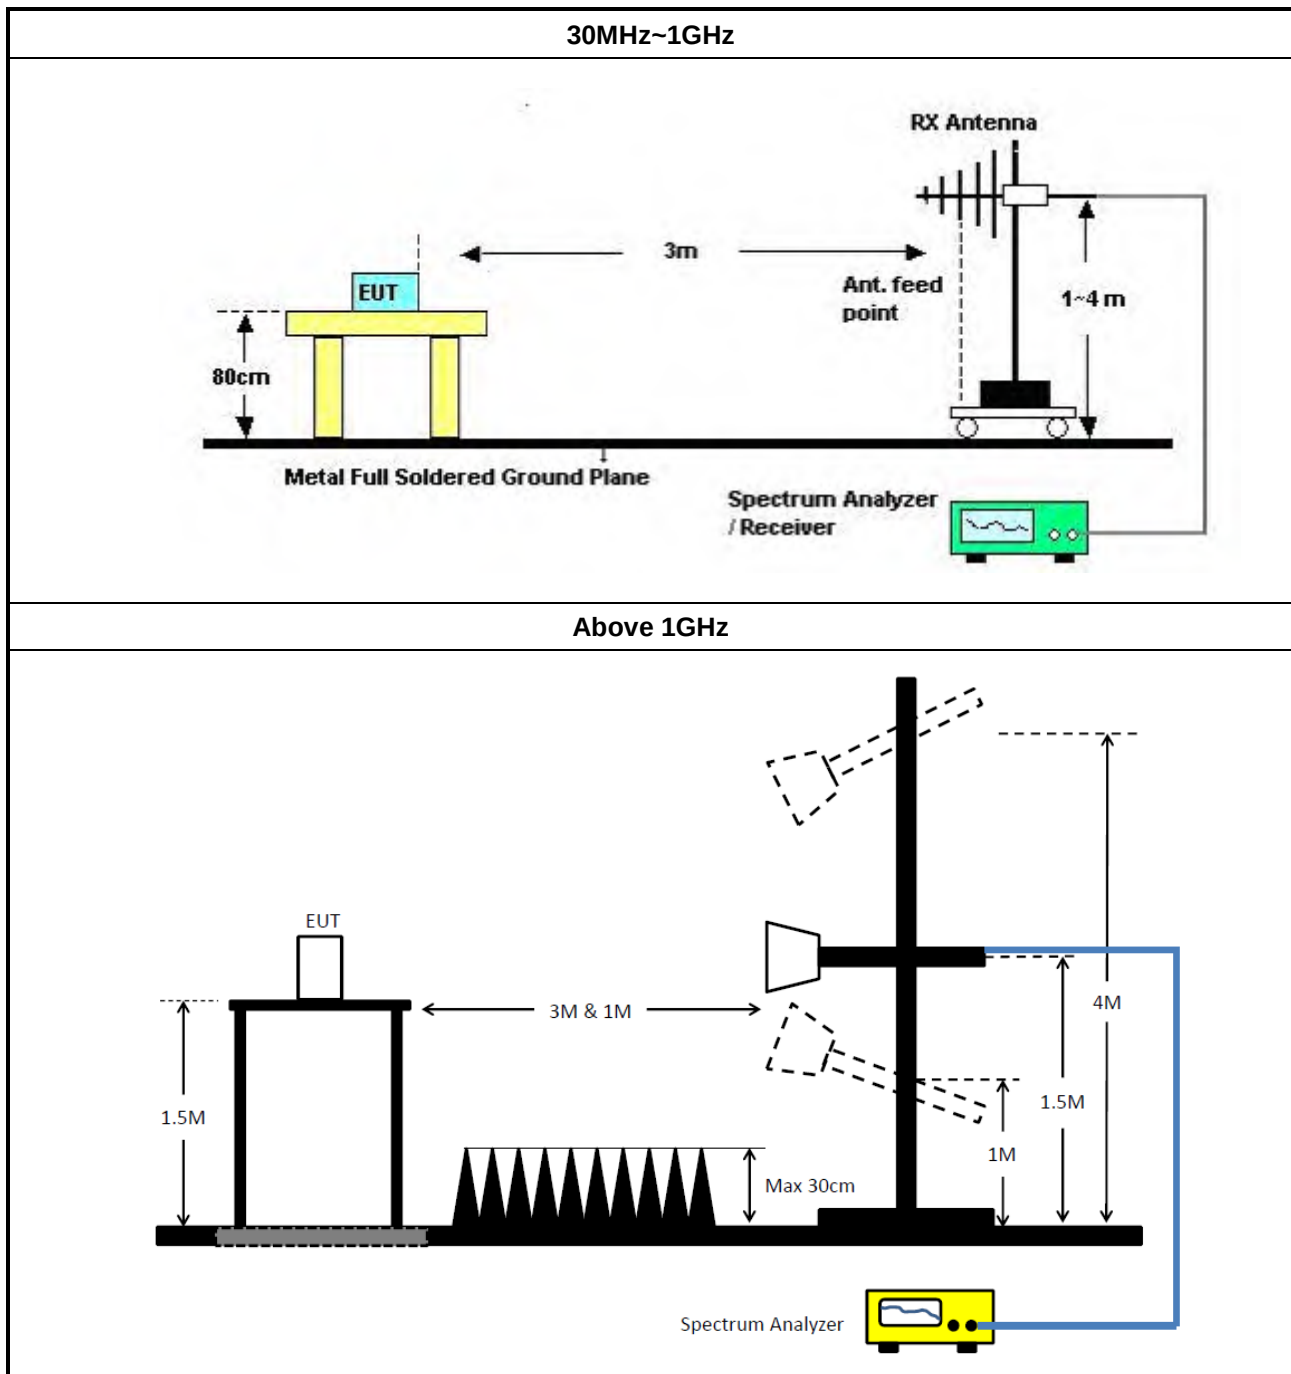

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102051	9kHz ~ 3.6GHz	21/May/2025	20/May/2026
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	101578	9kHz ~ 30MHz	24/Aug/2025	23/Aug/2026
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127477	9kHz ~ 30MHz	15/May/2025	14/May/2026
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	26/Feb/2025	25/Feb/2026
Pulse Limiter	ROHDE & SCHWARZ	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	27/Oct/2025	26/Oct/2026
Software	Sporton	SENSE-EMI	V5.11.6	NA	NA	NA

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV3044	101345	10Hz~44GHz	26/Aug/2025	25/Aug/2026
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	29/Oct/2025	28/Oct/2026
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	28/Mar/2025	27/Mar/2026
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	28/Mar/2025	27/Mar/2026
SENSE-15407_NII	Sporton	V5.11.27	N/A	N/A	N/A	N/A

Instrument for Radiated Test_O-405_Full RU (03CH26-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	30MHz~1GHz 3m	06/Aug/2025	05/Aug/2026
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
EMI Test Receiver	ROHDE & SCHWARZ	ESR	102318	9kHz~3.6GHz	08/Dec/2025	07/Dec/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	20/Mar/2025	19/Mar/2026
Bilog Antenna & 6dB Attenuator	TESEQ & VGT	CBL 6111D & VFA 04002-06	63540/002	30MHz~1GHz	04/Jun/2025	03/Jun/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	9kHz~1GHz	03/Oct/2025	02/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 903	20230515-2	30MHz~1GHz	21/May/2025	20/May/2026
Preamplifier	SGH	PRAMP	20230515-4	1GHz ~18GHz	21/May/2025	20/May/2026



Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
		118-H				
Microwave Preamplifier	Agilent	8449B	3008A02602	1GHz ~18GHz	12/Mar/2025	11/Mar/2026
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

Instrument for Radiated Test_O-405E_Full RU (03CH25-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	30MHz~1GHz 3m	18/Jul/2025	17/Jul/2026
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	07/Aug/2025	06/Aug/2026
ESR7 EMI Test Receiver	ROHDE & SCHWARZ	ESR7	102956	9kHz~3.6GHz	26/Aug/2025	25/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	19/Nov/2025	18/Nov/2026
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	20/Mar/2025	19/Mar/2026
Bilog Antenna & 6dB Attenuator	TESEQ & VGT	CBL 6111D & VFA 04002-06	63537/001	30MHz~1GHz	23/May/2025	22/May/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	9kHz~1GHz	23/Apr/2025	22/Apr/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	15/Feb/2025	14/Feb/2026
Preamplifier	SGH	PRAMP 903	20230515-1	25MHz~3GHz	21/May/2025	20/May/2026
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz~18GHz	21/May/2025	20/May/2026
Preamplifier	EMCI	EM01G18G	060940	1GHz~18GHz	21/Oct/2025	20/Oct/2026
Amplifier	EM	EM18G40GA	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

**Instrument for Radiated Test_Multi-RU+Puncturing**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	07/Aug/2025	06/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	19/Nov/2025	18/Nov/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	15/Feb/2025	14/Feb/2026
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz~18GHz	21/May/2025	20/May/2026
Preamplifier	EMCI	EM01G18G	060940	1GHz~18GHz	21/Oct/2025	20/Oct/2026
Amplifier	EM	EM18G40GA	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

Instrument for Radiated Test_Co-location (03CH26-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	21/May/2025	20/May/2026
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-EMI	Sporton	V5.11.9	NA	NA	NA	NA

Instrument for Radiated Test_Co-location (03CH25-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	07/Aug/2025	06/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101410	10Hz~44GHz	19/Nov/2025	18/Nov/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	15/Feb/2025	14/Feb/2026
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz~18GHz	21/May/2025	20/May/2026
Amplifier	EM	EM18G40GA	060874	18GHz ~ 40GHz	18/Apr/2025	17/Apr/2026
SENSE-EMI	Sporton	V5.11.9	NA	NA	NA	NA



Conducted Emissions at Powerline_Non-Beamforming_O-405 Appendix A.1


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	6.34M	37.32	50.00	-12.68	Line


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	153.02k	47.41	65.83	-18.42	Line
Mode 1	Pass	AV	153.02k	25.63	55.83	-30.20	Line
Mode 1	Pass	QP	251.04k	37.22	61.72	-24.50	Line
Mode 1	Pass	AV	251.04k	19.54	51.72	-32.18	Line
Mode 1	Pass	QP	355.28k	29.63	58.83	-29.20	Line
Mode 1	Pass	AV	355.28k	14.89	48.83	-33.94	Line
Mode 1	Pass	QP	967.69k	32.86	56.00	-23.14	Line
Mode 1	Pass	AV	967.69k	31.91	46.00	-14.09	Line
Mode 1	Pass	QP	4.89M	35.39	56.00	-20.61	Line
Mode 1	Pass	AV	4.89M	32.02	46.00	-13.98	Line
Mode 1	Pass	QP	6.34M	40.41	60.00	-19.59	Line
Mode 1	Pass	AV	6.34M	37.32	50.00	-12.68	Line
Mode 1	Pass	QP	151.81k	47.60	65.90	-18.30	Neutral
Mode 1	Pass	AV	151.81k	24.49	55.90	-31.41	Neutral
Mode 1	Pass	QP	253.05k	36.85	61.66	-24.81	Neutral
Mode 1	Pass	AV	253.05k	19.70	51.66	-31.96	Neutral
Mode 1	Pass	QP	372.72k	32.72	58.45	-25.73	Neutral
Mode 1	Pass	AV	372.72k	32.22	48.45	-16.23	Neutral
Mode 1	Pass	QP	1.29M	33.97	56.00	-22.03	Neutral
Mode 1	Pass	AV	1.29M	33.11	46.00	-12.89	Neutral
Mode 1	Pass	QP	4.89M	35.29	56.00	-20.71	Neutral
Mode 1	Pass	AV	4.89M	31.73	46.00	-14.27	Neutral
Mode 1	Pass	QP	14.04M	38.54	60.00	-21.46	Neutral
Mode 1	Pass	AV	14.04M	37.04	50.00	-12.96	Neutral

Conducted Emissions at Powerline_Mode 1

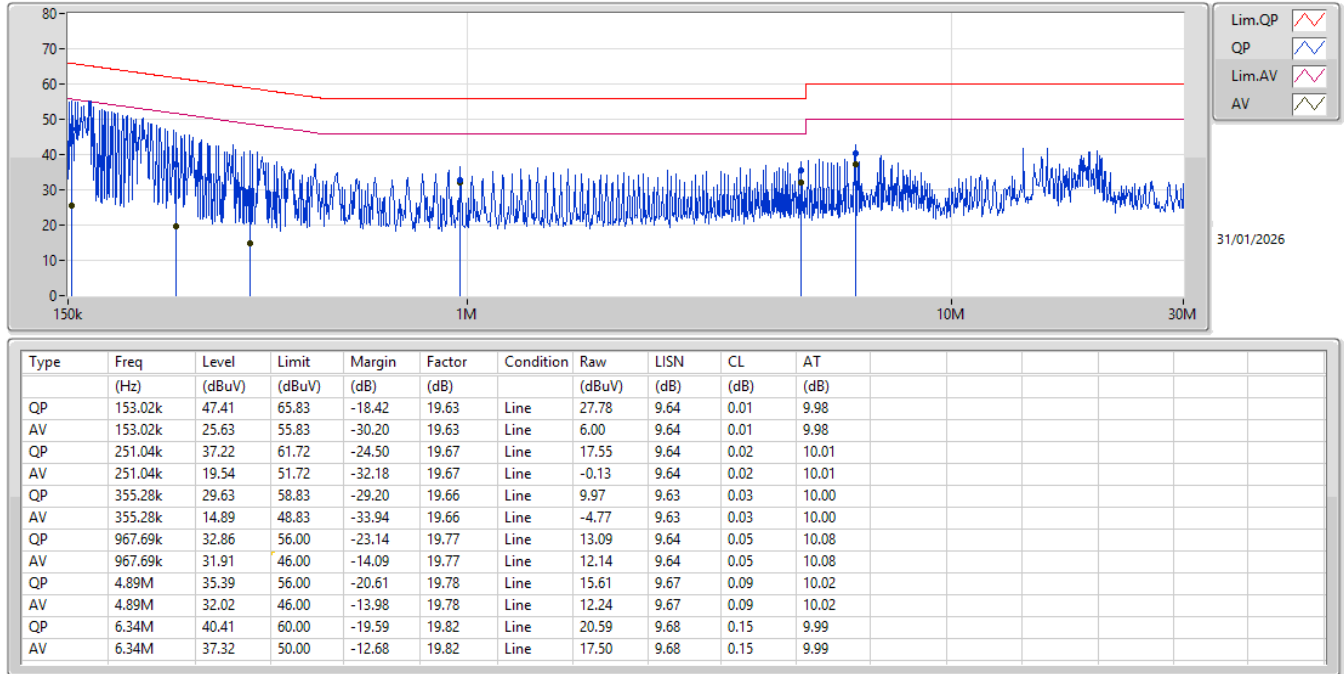

Conducted Emissions at Powerline_Mode 1

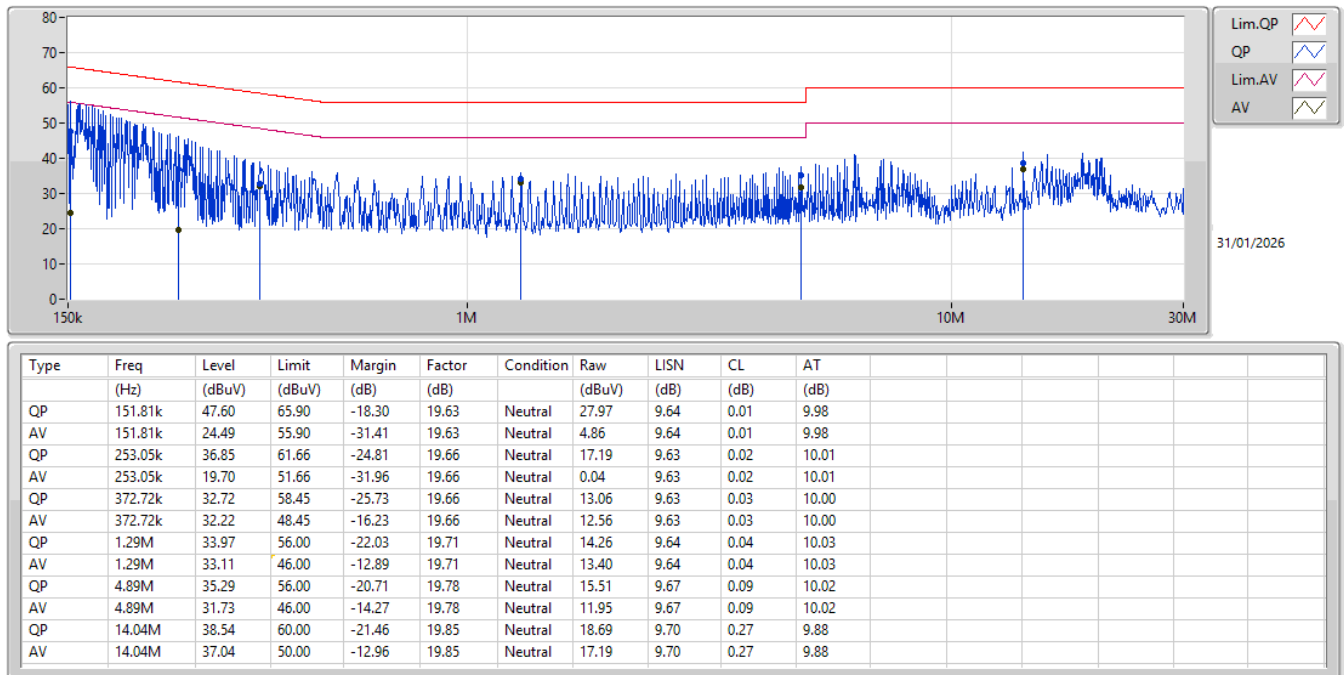



Conducted Emissions at Powerline_Non-Beamforming_O-405E Appendix A.2


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	18.56M	40.65	50.00	-9.35	Line

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	150.6k	47.57	65.96	-18.39	Line
Mode 1	Pass	AV	150.6k	24.22	55.96	-31.74	Line
Mode 1	Pass	QP	253.05k	36.76	61.66	-24.90	Line
Mode 1	Pass	AV	253.05k	19.59	51.66	-32.07	Line
Mode 1	Pass	QP	377.21k	36.14	58.33	-22.19	Line
Mode 1	Pass	AV	377.21k	35.92	48.33	-12.41	Line
Mode 1	Pass	QP	915.09k	33.27	56.00	-22.73	Line
Mode 1	Pass	AV	915.09k	33.01	46.00	-12.99	Line
Mode 1	Pass	QP	4.89M	35.66	56.00	-20.34	Line
Mode 1	Pass	AV	4.89M	32.57	46.00	-13.43	Line
Mode 1	Pass	QP	18.56M	41.90	60.00	-18.10	Line
Mode 1	Pass	AV	18.56M	40.65	50.00	-9.35	Line
Mode 1	Pass	QP	158.62k	47.14	65.54	-18.40	Neutral
Mode 1	Pass	AV	158.62k	36.67	55.54	-18.87	Neutral
Mode 1	Pass	QP	256.1k	36.60	61.56	-24.96	Neutral
Mode 1	Pass	AV	256.1k	20.25	51.56	-31.31	Neutral
Mode 1	Pass	QP	378.72k	34.91	58.31	-23.40	Neutral
Mode 1	Pass	AV	378.72k	34.52	48.31	-13.79	Neutral
Mode 1	Pass	QP	1.61M	34.19	56.00	-21.81	Neutral
Mode 1	Pass	AV	1.61M	33.84	46.00	-12.16	Neutral
Mode 1	Pass	QP	4.46M	35.11	56.00	-20.89	Neutral
Mode 1	Pass	AV	4.46M	33.32	46.00	-12.68	Neutral
Mode 1	Pass	QP	18.56M	41.89	60.00	-18.11	Neutral
Mode 1	Pass	AV	18.56M	40.60	50.00	-9.40	Neutral

Conducted Emissions at Powerline_Mode 1

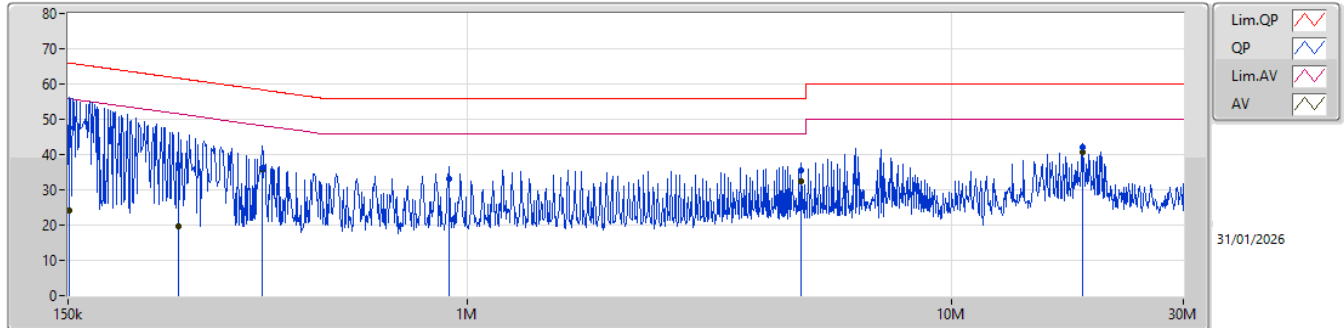

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)								
QP	150.6k	47.57	65.96	-18.39	19.63	Line	27.94	9.64	0.01	9.98								
AV	150.6k	24.22	55.96	-31.74	19.63	Line	4.59	9.64	0.01	9.98								
QP	253.05k	36.76	61.66	-24.90	19.67	Line	17.09	9.64	0.02	10.01								
AV	253.05k	19.59	51.66	-32.07	19.67	Line	-0.08	9.64	0.02	10.01								
QP	377.21k	36.14	58.33	-22.19	19.66	Line	16.48	9.63	0.03	10.00								
AV	377.21k	35.92	48.33	-12.41	19.66	Line	16.26	9.63	0.03	10.00								
QP	915.09k	33.27	56.00	-22.73	19.76	Line	13.51	9.64	0.05	10.07								
AV	915.09k	33.01	46.00	-12.99	19.76	Line	13.25	9.64	0.05	10.07								
QP	4.89M	35.66	56.00	-20.34	19.78	Line	15.88	9.67	0.09	10.02								
AV	4.89M	32.57	46.00	-13.43	19.78	Line	12.79	9.67	0.09	10.02								
QP	18.56M	41.90	60.00	-18.10	19.97	Line	21.93	9.63	0.28	10.06								
AV	18.56M	40.65	50.00	-9.35	19.97	Line	20.68	9.63	0.28	10.06								

Conducted Emissions at Powerline_Mode 1

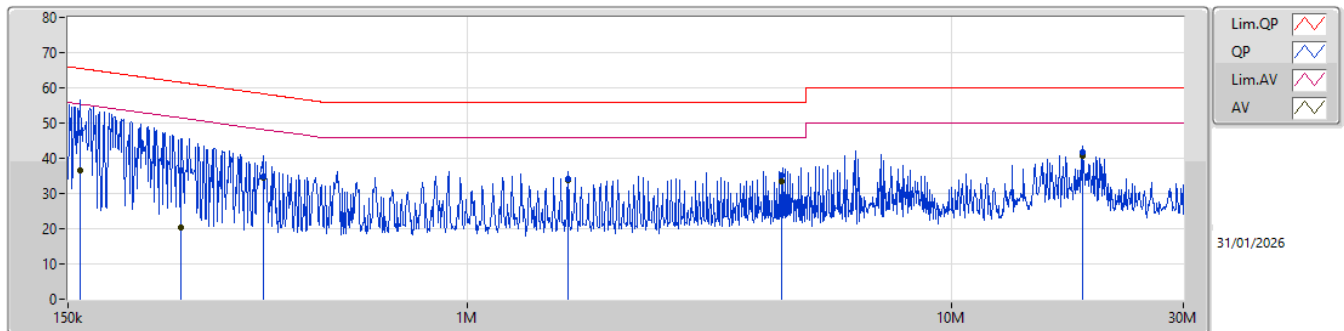

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)								
QP	158.62k	47.14	65.54	-18.40	19.64	Neutral	27.50	9.64	0.01	9.99								
AV	158.62k	36.67	55.54	-18.87	19.64	Neutral	17.03	9.64	0.01	9.99								
QP	256.1k	36.60	61.56	-24.96	19.66	Neutral	16.94	9.63	0.02	10.01								
AV	256.1k	20.25	51.56	-31.31	19.66	Neutral	0.59	9.63	0.02	10.01								
QP	378.72k	34.91	58.31	-23.40	19.66	Neutral	15.25	9.63	0.03	10.00								
AV	378.72k	34.52	48.31	-13.79	19.66	Neutral	14.86	9.63	0.03	10.00								
QP	1.61M	34.19	56.00	-21.81	19.68	Neutral	14.51	9.65	0.04	9.99								
AV	1.61M	33.84	46.00	-12.16	19.68	Neutral	14.16	9.65	0.04	9.99								
QP	4.46M	35.11	56.00	-20.89	19.77	Neutral	15.34	9.66	0.07	10.04								
AV	4.46M	33.32	46.00	-12.68	19.77	Neutral	13.55	9.66	0.07	10.04								
QP	18.56M	41.89	60.00	-18.11	20.05	Neutral	21.84	9.71	0.28	10.06								
AV	18.56M	40.60	50.00	-9.40	20.05	Neutral	20.55	9.71	0.28	10.06								

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	22.99M	19.185M	19M2D1D	21.34M	18.966M
802.11be EHT40_Nss1,(MCS0)_2TX	44.99M	38.481M	38M5D1D	42.35M	38.151M
802.11be EHT80_Nss1,(MCS0)_2TX	89.54M	77.841M	77M8D1D	81.4M	77.181M
802.11be EHT160_Nss1,(MCS0)_2TX	173.8M	157.441M	157MD1D	171.16M	156.562M
802.11be EHT320_Nss1,(MCS0)_2TX	347.6M	316.642M	317MD1D	335.28M	314.883M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.155M	19.185M	19M2D1D	20.845M	18.911M
802.11be EHT40_Nss1,(MCS0)_2TX	44.88M	38.481M	38M5D1D	42.24M	37.821M
802.11be EHT80_Nss1,(MCS0)_2TX	88M	77.841M	77M8D1D	84.04M	77.181M
802.11be EHT160_Nss1,(MCS0)_2TX	175.56M	157.441M	157MD1D	171.6M	157.441M

Max-N dB = Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	Inf	22.99M	19.185M	22.165M	18.966M
6195MHz	Pass	Inf	22.44M	18.966M	22.11M	19.075M
6415MHz	Pass	Inf	21.34M	19.02M	22.88M	19.185M
6535MHz	Pass	Inf	22.825M	19.13M	22.66M	19.075M
6695MHz	Pass	Inf	23.155M	19.185M	21.23M	19.02M
6855MHz	Pass	Inf	21.01M	18.911M	20.845M	18.911M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	43.78M	38.151M	43.89M	38.371M
6205MHz	Pass	Inf	44.99M	38.481M	42.35M	38.151M
6405MHz	Pass	Inf	44.77M	38.261M	44.44M	38.151M
6565MHz	Pass	Inf	43.67M	37.821M	44.33M	38.041M
6685MHz	Pass	Inf	42.24M	37.931M	42.9M	38.151M
6845MHz	Pass	Inf	43.78M	38.481M	44.88M	38.371M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	Inf	89.54M	77.181M	84.48M	77.621M
6225MHz	Pass	Inf	86.68M	77.841M	86.9M	77.621M
6385MHz	Pass	Inf	84.7M	77.621M	81.4M	77.181M
6625MHz	Pass	Inf	86.24M	77.181M	88M	77.621M
6705MHz	Pass	Inf	84.48M	77.181M	84.04M	77.841M
6785MHz	Pass	Inf	84.7M	77.401M	85.8M	77.841M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	173.36M	156.562M	171.6M	157.441M
6185MHz	Pass	Inf	171.16M	157.441M	172.48M	157.441M
6345MHz	Pass	Inf	172.04M	157.441M	173.8M	156.562M
6665MHz	Pass	Inf	175.56M	157.441M	171.6M	157.441M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320M	335.28M	315.762M	339.68M	314.883M
6265MHz	Pass	320M	347.6M	316.642M	344.08M	315.762M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5955MHz

07/01/2026

CF (Hz)
5.955G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

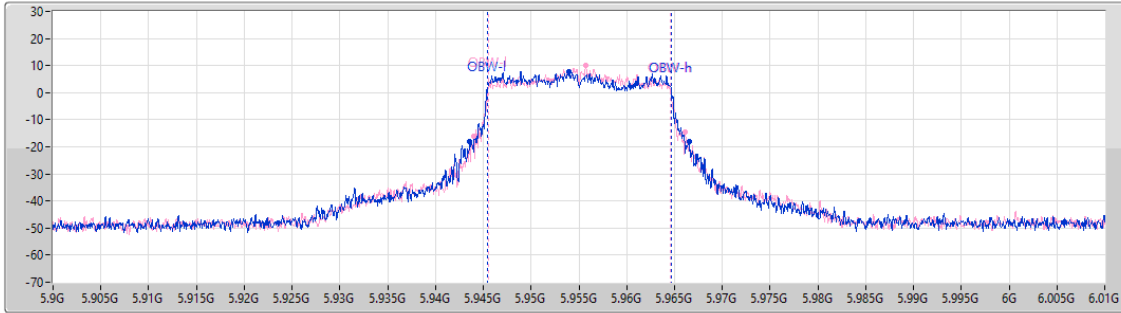

26dB(Hz)	FI-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	FI-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.99M	5.94356G	5.96655G	19.185M	5.945435G	5.96462G	Inf	1
22.165M	5.944G	5.966165G	18.966M	5.945545G	5.96451G	Inf	2

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6205MHz

07/01/2026

CF (Hz)
6.205G


Span (Hz)
220M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

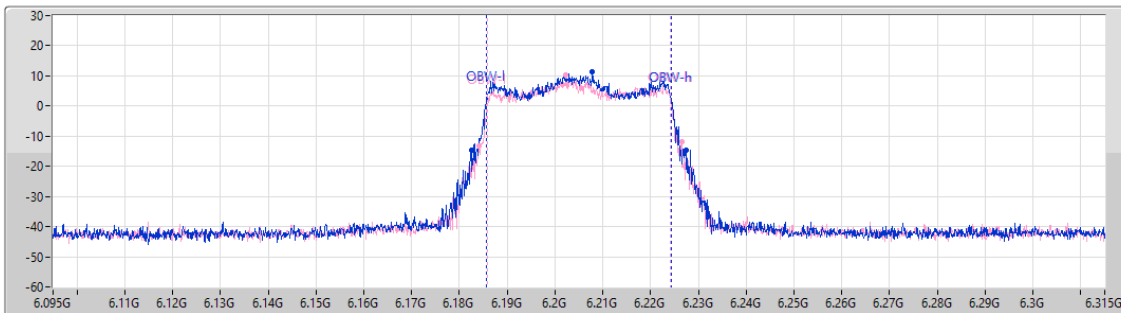

26dB(Hz)	FI-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	FI-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
44.99M	6.18245G	6.22744G	38.481M	6.18576G	6.22424G	Inf	1
42.35M	6.1841G	6.22645G	38.151M	6.18598G	6.22413G	Inf	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5985MHz

07/01/2026

CF (Hz)
5.985G


Span (Hz)
440M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

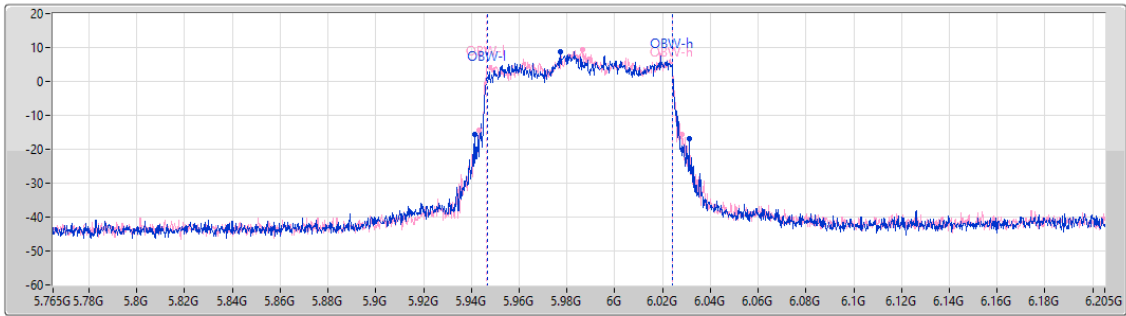

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
89.54M	5.94166G	6.0312G	77.181M	5.946739G	6.023921G	Inf	1
84.48M	5.94342G	6.0279G	77.621M	5.946519G	6.02414G	Inf	2

Port 1 

Port 2 

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6345MHz

07/01/2026

CF (Hz)
6.345G


Span (Hz)
880M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

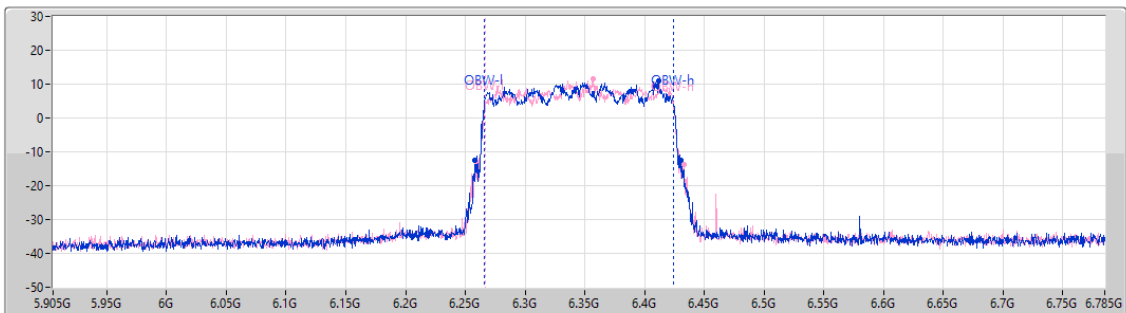

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
172.04M	6.25832G	6.43036G	157.441M	6.266279G	6.423721G	Inf	1
173.8M	6.2592G	6.433G	156.562M	6.267159G	6.423721G	Inf	2

Port 1 

Port 2 

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6265MHz

07/01/2026

CF (Hz)
6.265G


Span (Hz)
1.76G

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
7.04m

Detector Type
Peak

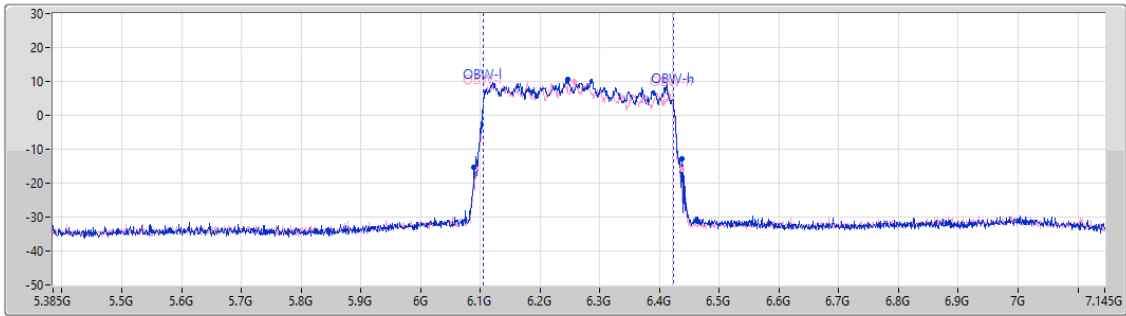

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
347.6M	6.08988G	6.43748G	316.642M	6.1058G	6.422441G	320M	1
344.08M	6.09252G	6.4366G	315.762M	6.1058G	6.421562G	320M	2

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6695MHz

07/01/2026

CF (Hz)
6.695G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

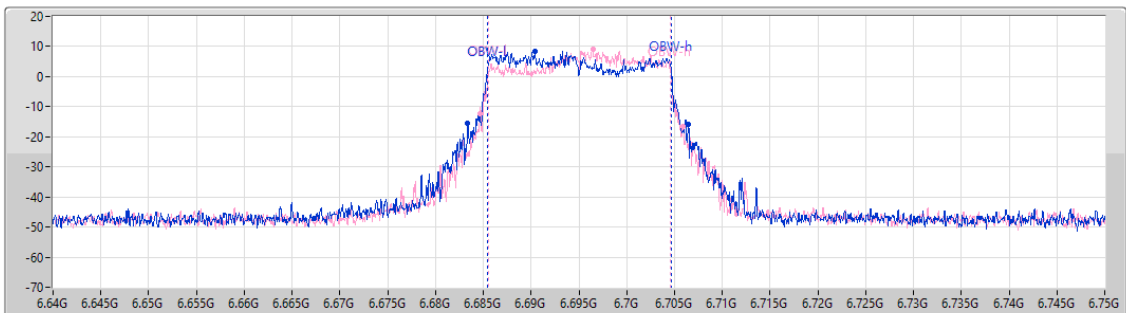


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
23.155M	6.68334G	6.706495G	19.185M	6.685435G	6.70462G	Inf	1
21.23M	6.68466G	6.70589G	19.02M	6.685545G	6.704565G	Inf	2

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6845MHz

07/01/2026

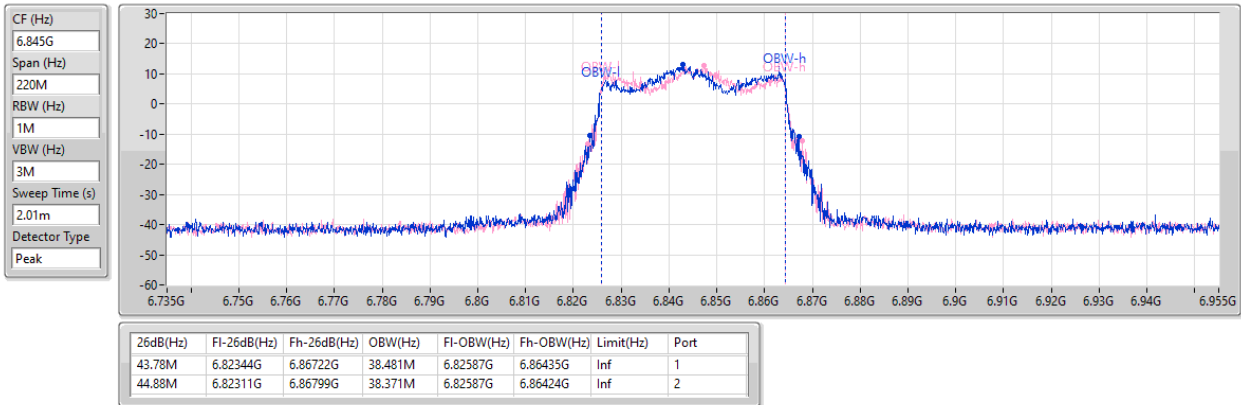


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6625MHz

07/01/2026

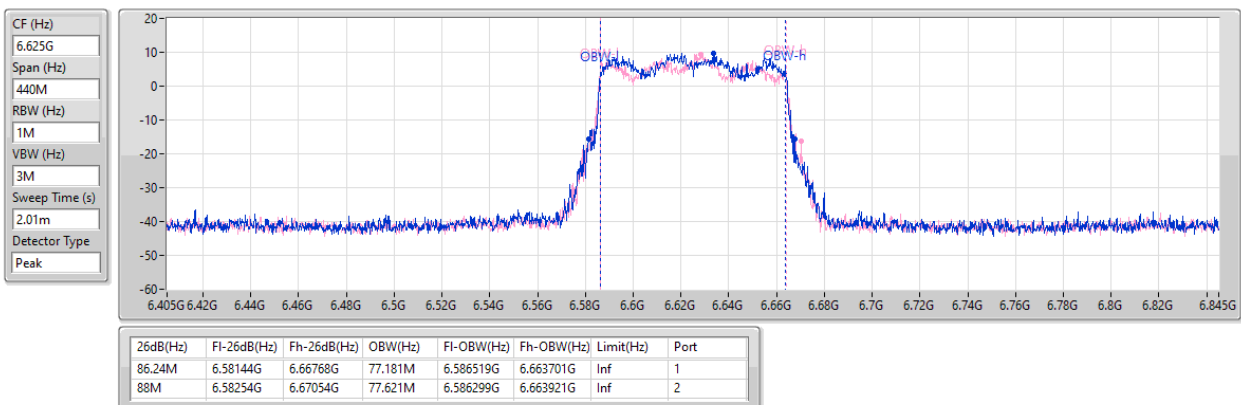

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6665MHz

07/01/2026

CF (Hz)
6.665G


Span (Hz)
880M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
4m

Detector Type
Peak

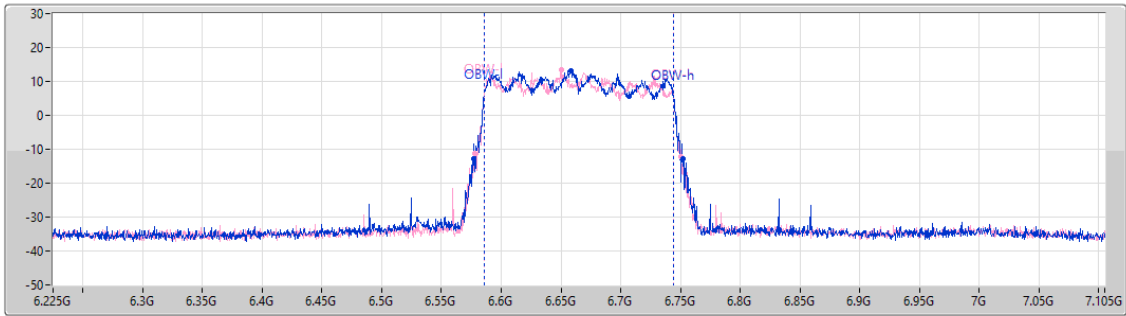

Port 1 

Port 2 

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
175.56M	6.57656G	6.75212G	157.441M	6.586279G	6.743721G	Inf	1
171.6M	6.57832G	6.74992G	157.441M	6.586279G	6.743721G	Inf	2

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	22.66M	19.13M	19M1D1D	21.065M	18.856M
802.11be EHT40_Nss1,(MCS0)_2TX	44.66M	38.481M	38M5D1D	42.79M	37.931M
802.11be EHT80_Nss1,(MCS0)_2TX	87.78M	78.061M	78M1D1D	84.04M	77.181M
802.11be EHT160_Nss1,(MCS0)_2TX	174.68M	157.881M	158MD1D	169.84M	156.562M
802.11be EHT320_Nss1,(MCS0)_2TX	345.84M	315.762M	316MD1D	335.28M	314.883M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.155M	19.185M	19M2D1D	20.57M	18.856M
802.11be EHT40_Nss1,(MCS0)_2TX	45.32M	38.481M	38M5D1D	42.79M	37.821M
802.11be EHT80_Nss1,(MCS0)_2TX	86.24M	77.841M	77M8D1D	84.92M	77.181M
802.11be EHT160_Nss1,(MCS0)_2TX	175.12M	157.881M	158MD1D	174.24M	157.441M

Max-N dB = Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	Inf	22.66M	19.13M	21.34M	19.075M
6195MHz	Pass	Inf	21.065M	18.856M	22.22M	19.075M
6415MHz	Pass	Inf	21.725M	18.966M	22.55M	19.13M
6535MHz	Pass	Inf	22.495M	19.185M	22.385M	19.075M
6695MHz	Pass	Inf	23.155M	19.185M	22.165M	19.02M
6855MHz	Pass	Inf	20.57M	18.911M	21.12M	18.856M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	44.11M	38.371M	44.33M	38.261M
6205MHz	Pass	Inf	43.67M	38.481M	44.66M	38.151M
6405MHz	Pass	Inf	42.9M	38.261M	42.79M	37.931M
6565MHz	Pass	Inf	45.32M	37.821M	44.11M	38.151M
6685MHz	Pass	Inf	44M	37.821M	42.79M	38.371M
6845MHz	Pass	Inf	43.01M	38.481M	43.56M	38.371M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	Inf	86.02M	77.401M	84.92M	77.841M
6225MHz	Pass	Inf	84.04M	78.061M	84.48M	77.181M
6385MHz	Pass	Inf	84.04M	77.621M	87.78M	77.181M
6625MHz	Pass	Inf	85.8M	77.401M	84.92M	77.621M
6705MHz	Pass	Inf	85.14M	77.181M	86.02M	77.621M
6785MHz	Pass	Inf	85.58M	77.401M	86.24M	77.841M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	169.84M	157.441M	171.6M	157.441M
6185MHz	Pass	Inf	174.68M	157.881M	172.92M	157.441M
6345MHz	Pass	Inf	173.36M	157.441M	170.72M	156.562M
6665MHz	Pass	Inf	174.24M	157.441M	175.12M	157.881M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320M	335.28M	314.883M	335.28M	314.883M
6265MHz	Pass	320M	345.84M	314.883M	342.32M	315.762M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5955MHz

08/01/2026

CF (Hz)
5.955G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

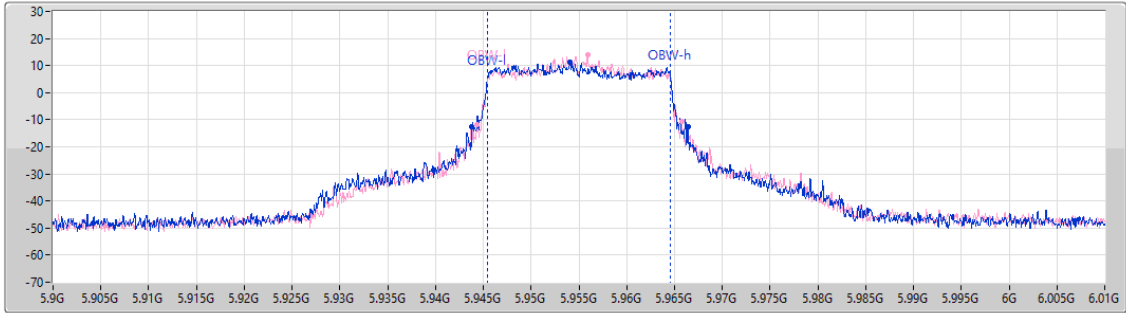

26dB(Hz)	FI-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	FI-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.66M	5.94378G	5.96644G	19.13M	5.945435G	5.964565G	Inf	1
21.34M	5.944385G	5.965725G	19.075M	5.94549G	5.964565G	Inf	2

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6205MHz

08/01/2026

CF (Hz)
6.205G


Span (Hz)
220M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

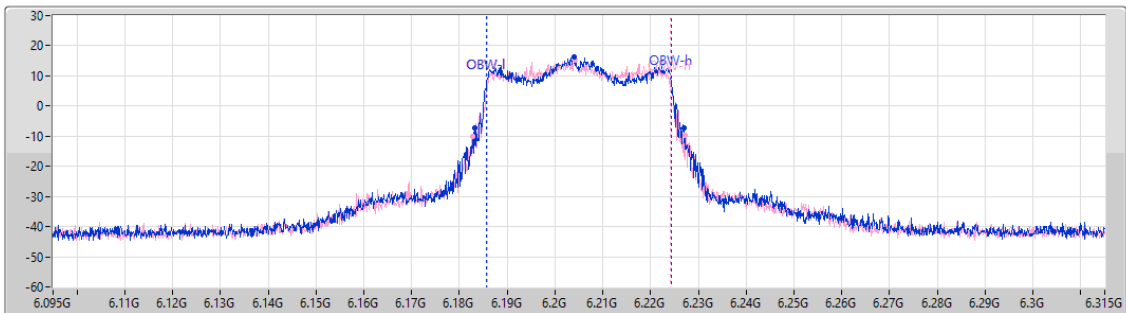


26dB(Hz)	FI-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	FI-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
43.67M	6.18322G	6.22689G	38.481M	6.18576G	6.22424G	Inf	1
44.66M	6.18267G	6.22733G	38.151M	6.18598G	6.22413G	Inf	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6385MHz

08/01/2026

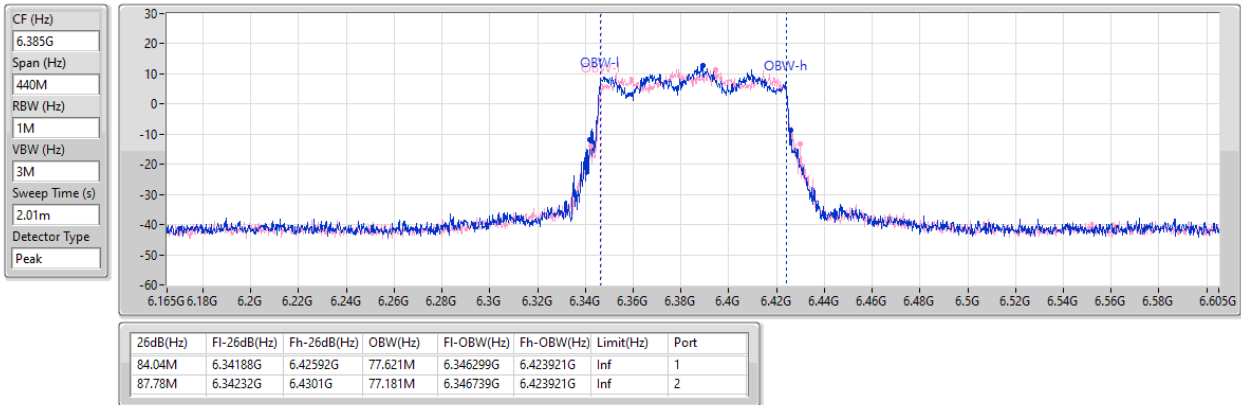


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6185MHz

08/01/2026

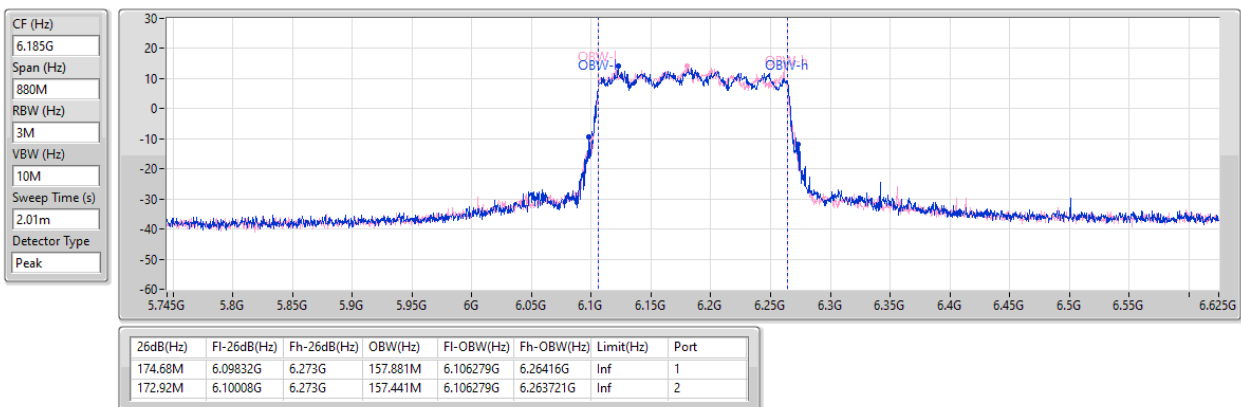


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6265MHz

08/01/2026

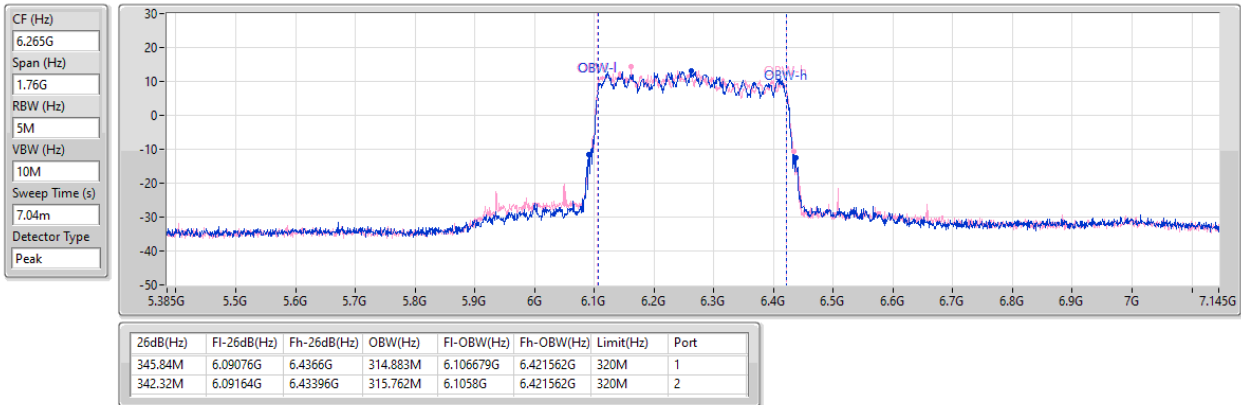


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6695MHz

08/01/2026

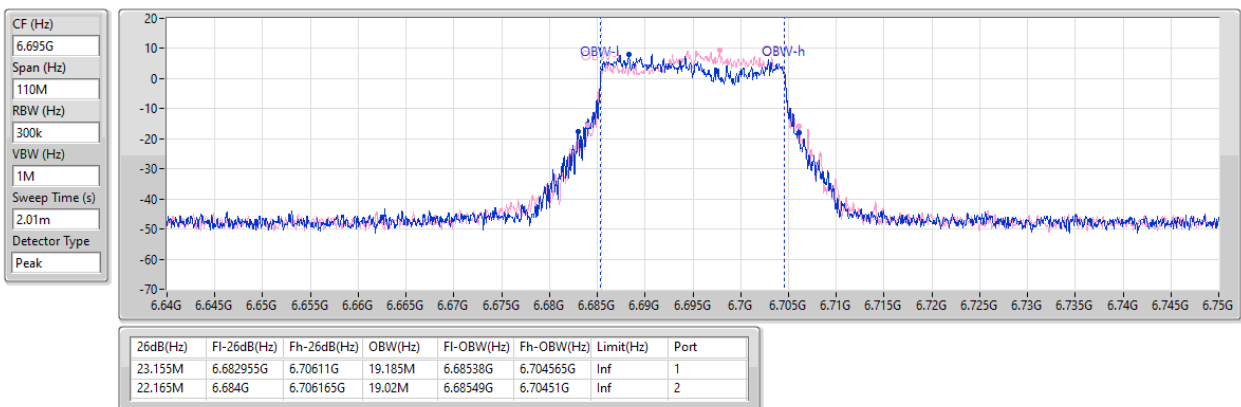


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6565MHz

08/01/2026

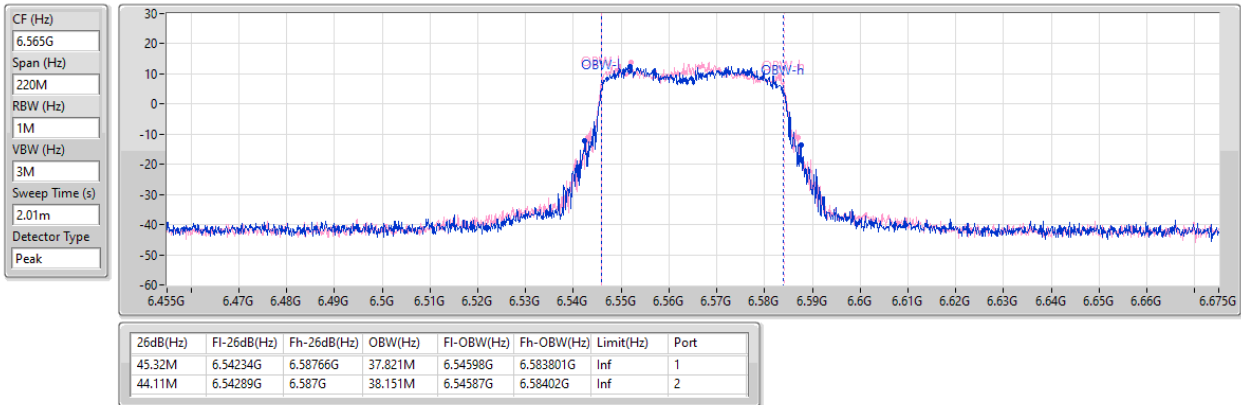


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6785MHz

08/01/2026

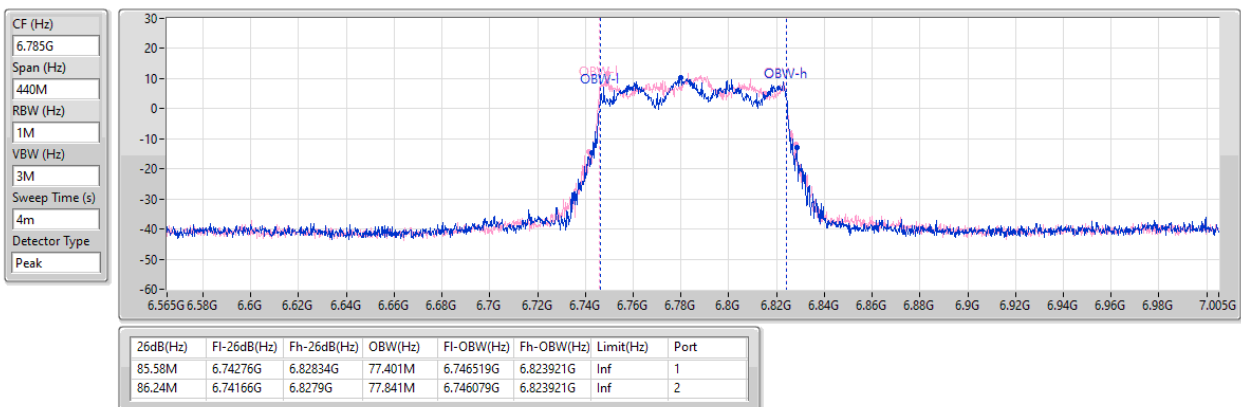

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6665MHz

08/01/2026

CF (Hz)
6.665G


Span (Hz)
880M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
4m

Detector Type
Peak

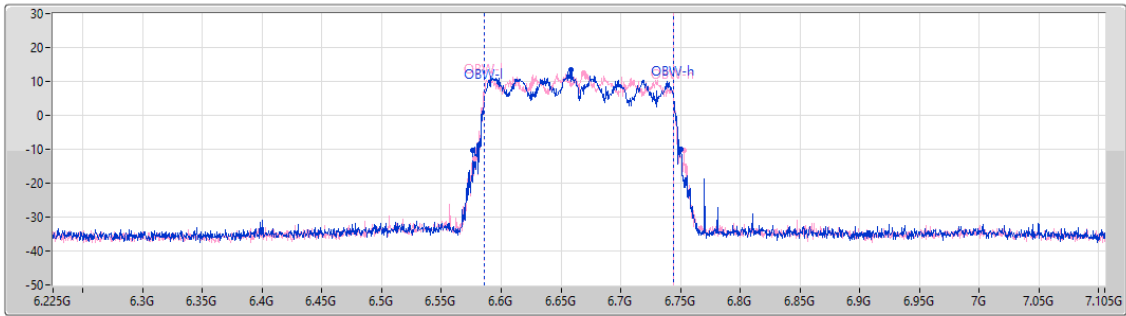

Port 1 

Port 2 

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
174.24M	6.57612G	6.75036G	157.441M	6.586279G	6.743721G	Inf	1
175.12M	6.57788G	6.753G	157.881M	6.58584G	6.743721G	Inf	2



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	19.52	0.08954	24.54	0.28445
802.11be EHT40_Nss1,(MCS0)_2TX	19.37	0.08650	24.39	0.27479
802.11be EHT80_Nss1,(MCS0)_2TX	19.07	0.08072	24.09	0.25645
802.11be EHT160_Nss1,(MCS0)_2TX	19.31	0.08531	24.33	0.27102
802.11be EHT320_Nss1,(MCS0)_2TX	18.76	0.07516	23.78	0.23878
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	19.93	0.09840	25.13	0.32584
802.11be EHT40_Nss1,(MCS0)_2TX	19.89	0.09750	25.09	0.32285
802.11be EHT80_Nss1,(MCS0)_2TX	20.25	0.10593	25.45	0.35075
802.11be EHT160_Nss1,(MCS0)_2TX	20.69	0.11722	25.89	0.38815



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	EIRP [Phi 30°] (dBm)	EIRP [Phi 30°] Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.02	16.28	16.72	19.52	Inf	24.54	36.00	20.95	21.00
6195MHz	Pass	5.02	15.02	13.46	17.32	Inf	22.34	36.00	20.56	21.00
6415MHz	Pass	5.02	15.77	15.15	18.48	Inf	23.50	36.00	20.15	21.00
6535MHz	Pass	5.20	17.08	16.75	19.93	Inf	25.13	36.00	20.43	21.00
6695MHz	Pass	5.20	16.53	16.59	19.57	Inf	24.77	36.00	20.80	21.00
6855MHz	Pass	5.20	15.99	16.01	19.01	Inf	24.21	36.00	20.73	21.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.02	16.20	16.51	19.37	Inf	24.39	36.00	20.59	21.00
6205MHz	Pass	5.02	14.84	13.55	17.25	Inf	22.27	36.00	20.57	21.00
6405MHz	Pass	5.02	15.86	15.51	18.70	Inf	23.72	36.00	20.87	21.00
6565MHz	Pass	5.20	16.69	16.33	19.52	Inf	24.72	36.00	20.59	21.00
6685MHz	Pass	5.20	17.04	16.71	19.89	Inf	25.09	36.00	20.53	21.00
6845MHz	Pass	5.20	16.53	16.62	19.59	Inf	24.79	36.00	20.82	21.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.02	15.83	16.28	19.07	Inf	24.09	36.00	20.69	21.00
6225MHz	Pass	5.02	15.33	14.15	17.79	Inf	22.81	36.00	20.75	21.00
6385MHz	Pass	5.02	15.54	15.33	18.45	Inf	23.47	36.00	20.45	21.00
6625MHz	Pass	5.20	17.57	16.89	20.25	Inf	25.45	36.00	20.84	21.00
6705MHz	Pass	5.20	17.06	16.75	19.92	Inf	25.12	36.00	20.78	21.00
6785MHz	Pass	5.20	16.41	16.36	19.40	Inf	24.60	36.00	20.78	21.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.02	16.09	16.26	19.19	Inf	24.21	36.00	20.66	21.00
6185MHz	Pass	5.02	15.35	14.42	17.92	Inf	22.94	36.00	20.57	21.00
6345MHz	Pass	5.02	16.38	16.21	19.31	Inf	24.33	36.00	20.62	21.00
6665MHz	Pass	5.20	17.91	17.43	20.69	Inf	25.89	36.00	20.67	21.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.02	15.62	15.65	18.65	Inf	23.67	36.00	20.89	21.00
6265MHz	Pass	5.02	16.05	15.42	18.76	Inf	23.78	36.00	20.61	21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	22.98	0.19861	26.48	0.44463
802.11be EHT40_Nss1,(MCS0)_2TX	22.73	0.18750	26.23	0.41976
802.11be EHT80_Nss1,(MCS0)_2TX	22.76	0.18880	26.26	0.42267
802.11be EHT160_Nss1,(MCS0)_2TX	22.00	0.15849	25.50	0.35481
802.11be EHT320_Nss1,(MCS0)_2TX	22.03	0.15959	25.53	0.35727
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	21.54	0.14256	25.04	0.31915
802.11be EHT40_Nss1,(MCS0)_2TX	21.42	0.13868	24.92	0.31046
802.11be EHT80_Nss1,(MCS0)_2TX	20.53	0.11298	24.03	0.25293
802.11be EHT160_Nss1,(MCS0)_2TX	20.34	0.10814	23.84	0.24210



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	EIRP [Phi 30°] (dBm)	EIRP [Phi 30°] Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	3.50	19.75	20.17	22.98	Inf	26.48	36.00	20.87	21.00
6195MHz	Pass	3.50	19.19	18.82	22.02	Inf	25.52	36.00	20.87	21.00
6415MHz	Pass	3.50	18.40	18.31	21.37	Inf	24.87	36.00	20.81	21.00
6535MHz	Pass	3.50	18.16	18.87	21.54	Inf	25.04	36.00	20.06	21.00
6695MHz	Pass	3.50	15.54	17.00	19.34	Inf	22.84	36.00	20.87	21.00
6855MHz	Pass	3.50	15.43	16.08	18.78	Inf	22.28	36.00	20.96	21.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	3.50	19.09	19.16	22.14	Inf	25.64	36.00	20.77	21.00
6205MHz	Pass	3.50	19.84	19.60	22.73	Inf	26.23	36.00	20.91	21.00
6405MHz	Pass	3.50	18.13	17.96	21.06	Inf	24.56	36.00	20.74	21.00
6565MHz	Pass	3.50	18.15	18.66	21.42	Inf	24.92	36.00	20.93	21.00
6685MHz	Pass	3.50	16.05	17.30	19.73	Inf	23.23	36.00	20.84	21.00
6845MHz	Pass	3.50	15.18	15.91	18.57	Inf	22.07	36.00	20.62	21.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	3.50	19.23	19.22	22.24	Inf	25.74	36.00	20.83	21.00
6225MHz	Pass	3.50	19.87	19.62	22.76	Inf	26.26	36.00	20.81	21.00
6385MHz	Pass	3.50	19.00	18.94	21.98	Inf	25.48	36.00	20.91	21.00
6625MHz	Pass	3.50	17.10	17.63	20.38	Inf	23.88	36.00	20.86	21.00
6705MHz	Pass	3.50	16.07	17.19	19.68	Inf	23.18	36.00	20.59	21.00
6785MHz	Pass	3.50	17.00	17.99	20.53	Inf	24.03	36.00	20.80	21.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	3.50	18.74	18.83	21.80	Inf	25.30	36.00	20.93	21.00
6185MHz	Pass	3.50	18.88	19.09	22.00	Inf	25.50	36.00	20.83	21.00
6345MHz	Pass	3.50	18.03	18.05	21.05	Inf	24.55	36.00	20.80	21.00
6665MHz	Pass	3.50	17.03	17.61	20.34	Inf	23.84	36.00	20.88	21.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	3.50	18.73	19.29	22.03	Inf	25.53	36.00	20.63	21.00
6265MHz	Pass	3.50	18.43	18.57	21.51	Inf	25.01	36.00	20.84	21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	19.40	0.08710	25.96	0.39446
802.11be EHT40-BF_Nss1,(MCS0)_2TX	19.28	0.08472	25.84	0.38371
802.11be EHT80-BF_Nss1,(MCS0)_2TX	19.00	0.07943	25.56	0.35975
802.11be EHT160-BF_Nss1,(MCS0)_2TX	19.20	0.08318	25.76	0.37670
802.11be EHT320-BF_Nss1,(MCS0)_2TX	18.66	0.07345	25.22	0.33266
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	19.85	0.09661	27.14	0.51761
802.11be EHT40-BF_Nss1,(MCS0)_2TX	19.81	0.09572	27.10	0.51286
802.11be EHT80-BF_Nss1,(MCS0)_2TX	20.16	0.10375	27.45	0.55590
802.11be EHT160-BF_Nss1,(MCS0)_2TX	20.60	0.11482	27.89	0.61518

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	6.56	16.16	16.6	19.40	Inf	25.96	36.00
6195MHz	Pass	6.56	14.97	13.37	17.25	Inf	23.81	36.00
6415MHz	Pass	6.56	15.66	15.1	18.40	Inf	24.96	36.00
6535MHz	Pass	7.29	17	16.67	19.85	Inf	27.14	36.00
6695MHz	Pass	7.29	16.4	16.53	19.48	Inf	26.77	36.00
6855MHz	Pass	7.29	15.9	15.95	18.94	Inf	26.23	36.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	6.56	16.14	16.39	19.28	Inf	25.84	36.00
6205MHz	Pass	6.56	14.71	13.48	17.15	Inf	23.71	36.00
6405MHz	Pass	6.56	15.74	15.44	18.60	Inf	25.16	36.00
6565MHz	Pass	7.29	16.57	16.25	19.42	Inf	26.71	36.00
6685MHz	Pass	7.29	16.98	16.61	19.81	Inf	27.10	36.00
6845MHz	Pass	7.29	16.4	16.56	19.49	Inf	26.78	36.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.56	15.76	16.2	19.00	Inf	25.56	36.00
6225MHz	Pass	6.56	15.27	14.04	17.71	Inf	24.27	36.00
6385MHz	Pass	6.56	15.41	15.25	18.34	Inf	24.90	36.00
6625MHz	Pass	7.29	17.5	16.76	20.16	Inf	27.45	36.00
6705MHz	Pass	7.29	16.96	16.69	19.84	Inf	27.13	36.00
6785MHz	Pass	7.29	16.32	16.27	19.31	Inf	26.60	36.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.56	15.96	16.19	19.09	Inf	25.65	36.00
6185MHz	Pass	6.56	15.22	14.3	17.79	Inf	24.35	36.00
6345MHz	Pass	6.56	16.27	16.11	19.20	Inf	25.76	36.00
6665MHz	Pass	7.29	17.86	17.31	20.60	Inf	27.89	36.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.56	15.51	15.56	18.55	Inf	25.11	36.00
6265MHz	Pass	6.56	15.96	15.32	18.66	Inf	25.22	36.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.88	0.19409	29.39	0.86896
802.11be EHT40-BF_Nss1,(MCS0)_2TX	22.65	0.18408	29.16	0.82414
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.69	0.18578	29.20	0.83176
802.11be EHT160-BF_Nss1,(MCS0)_2TX	21.94	0.15631	28.45	0.69984
802.11be EHT320-BF_Nss1,(MCS0)_2TX	21.95	0.15668	28.46	0.70146
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.44	0.13932	27.95	0.62373
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.31	0.13521	27.82	0.60534
802.11be EHT80-BF_Nss1,(MCS0)_2TX	20.43	0.11041	26.94	0.49431
802.11be EHT160-BF_Nss1,(MCS0)_2TX	20.25	0.10593	26.76	0.47424

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	6.51	19.65	20.08	22.88	Inf	29.39	36.00
6195MHz	Pass	6.51	19.14	18.69	21.93	Inf	28.44	36.00
6415MHz	Pass	6.51	18.31	18.18	21.26	Inf	27.77	36.00
6535MHz	Pass	6.51	18.05	18.78	21.44	Inf	27.95	36.00
6695MHz	Pass	6.51	15.44	16.94	19.26	Inf	25.77	36.00
6855MHz	Pass	6.51	15.34	16.03	18.71	Inf	25.22	36.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	6.51	18.96	19.05	22.02	Inf	28.53	36.00
6205MHz	Pass	6.51	19.77	19.5	22.65	Inf	29.16	36.00
6405MHz	Pass	6.51	18.08	17.86	20.98	Inf	27.49	36.00
6565MHz	Pass	6.51	18.02	18.57	21.31	Inf	27.82	36.00
6685MHz	Pass	6.51	16	17.23	19.67	Inf	26.18	36.00
6845MHz	Pass	6.51	15.08	15.86	18.50	Inf	25.01	36.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.51	19.12	19.1	22.12	Inf	28.63	36.00
6225MHz	Pass	6.51	19.79	19.57	22.69	Inf	29.20	36.00
6385MHz	Pass	6.51	18.94	18.83	21.90	Inf	28.41	36.00
6625MHz	Pass	6.51	17.02	17.55	20.30	Inf	26.81	36.00
6705MHz	Pass	6.51	16	17.09	19.59	Inf	26.10	36.00
6785MHz	Pass	6.51	16.94	17.86	20.43	Inf	26.94	36.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.51	18.66	18.71	21.70	Inf	28.21	36.00
6185MHz	Pass	6.51	18.83	19.02	21.94	Inf	28.45	36.00
6345MHz	Pass	6.51	17.95	17.98	20.98	Inf	27.49	36.00
6665MHz	Pass	6.51	16.94	17.52	20.25	Inf	26.76	36.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.51	18.64	19.22	21.95	Inf	28.46	36.00
6265MHz	Pass	6.51	18.32	18.52	21.43	Inf	27.94	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	7.74	14.30
802.11be EHT40_Nss1,(MCS0)_2TX	4.96	11.52
802.11be EHT80_Nss1,(MCS0)_2TX	1.85	8.41
802.11be EHT160_Nss1,(MCS0)_2TX	-1.07	5.49
802.11be EHT320_Nss1,(MCS0)_2TX	-4.16	2.40
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	8.03	15.32
802.11be EHT40_Nss1,(MCS0)_2TX	6.09	13.38
802.11be EHT80_Nss1,(MCS0)_2TX	2.26	9.55
802.11be EHT160_Nss1,(MCS0)_2TX	-0.45	6.84

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	6.56	3.89	5.52	7.74	Inf	14.30	23.00
6195MHz	Pass	6.56	3.82	1.72	5.89	Inf	12.45	23.00
6415MHz	Pass	6.56	4.34	2.03	6.24	Inf	12.80	23.00
6535MHz	Pass	7.29	4.34	4.39	7.23	Inf	14.52	23.00
6695MHz	Pass	7.29	4.17	5.27	7.11	Inf	14.40	23.00
6855MHz	Pass	7.29	5.03	5.27	8.03	Inf	15.32	23.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	6.56	1.25	2.56	4.96	Inf	11.52	23.00
6205MHz	Pass	6.56	1.20	-0.97	3.21	Inf	9.77	23.00
6405MHz	Pass	6.56	2.11	-0.79	3.89	Inf	10.45	23.00
6565MHz	Pass	7.29	0.74	1.40	3.91	Inf	11.20	23.00
6685MHz	Pass	7.29	1.61	2.89	4.65	Inf	11.94	23.00
6845MHz	Pass	7.29	3.16	3.32	6.09	Inf	13.38	23.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.56	-1.67	-0.56	1.85	Inf	8.41	23.00
6225MHz	Pass	6.56	-1.18	-3.20	0.88	Inf	7.44	23.00
6385MHz	Pass	6.56	-0.96	-2.97	0.79	Inf	7.35	23.00
6625MHz	Pass	7.29	-0.27	0.14	2.25	Inf	9.54	23.00
6705MHz	Pass	7.29	-0.28	0.21	1.85	Inf	9.14	23.00
6785MHz	Pass	7.29	-0.31	-0.05	2.26	Inf	9.55	23.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.56	-4.21	-3.85	-1.07	Inf	5.49	23.00
6185MHz	Pass	6.56	-4.57	-6.02	-2.25	Inf	4.31	23.00
6345MHz	Pass	6.56	-3.35	-4.55	-1.61	Inf	4.95	23.00
6665MHz	Pass	7.29	-2.21	-2.48	-0.45	Inf	6.84	23.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.56	-7.09	-7.25	-4.16	Inf	2.40	23.00
6265MHz	Pass	6.56	-6.70	-7.79	-4.58	Inf	1.98	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5955MHz

07/01/2026

CF (Hz)
5.955G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

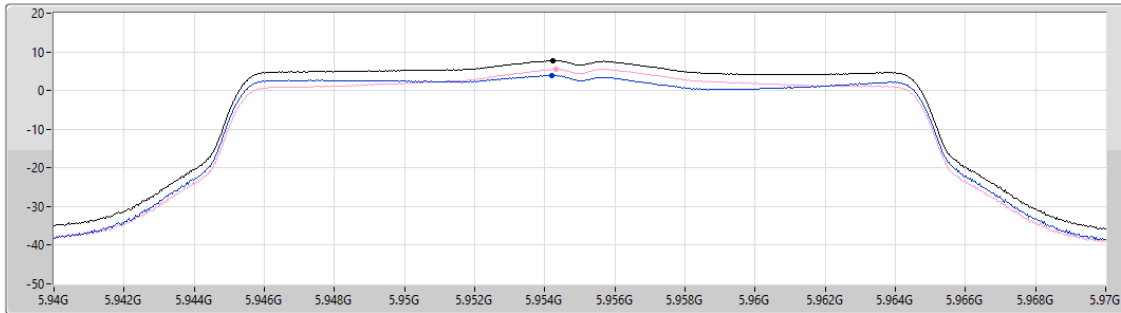

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.74	7.74	3.89	5.52

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5965MHz

07/01/2026

CF (Hz)
5.965G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

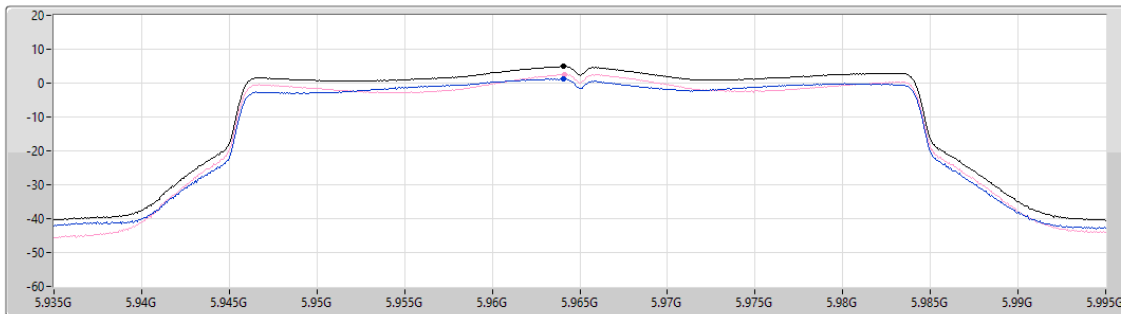

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.96	4.96	1.25	2.56

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5985MHz

07/01/2026

CF (Hz)
5.985G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

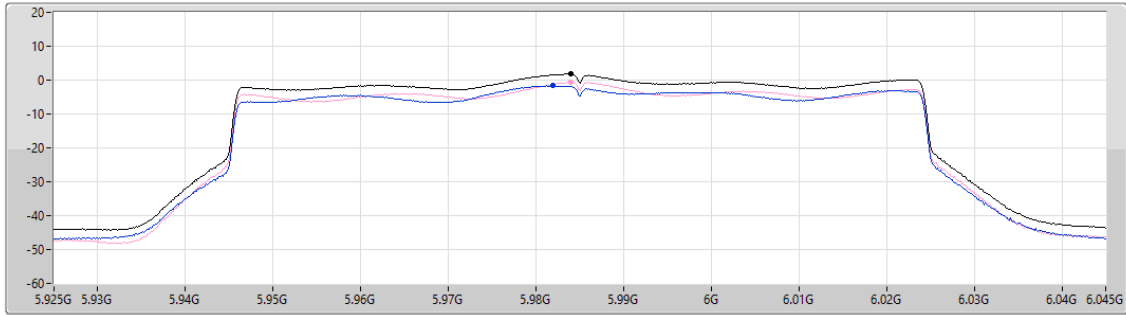

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.85	1.85	-1.67	-0.56

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6025MHz

07/01/2026

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

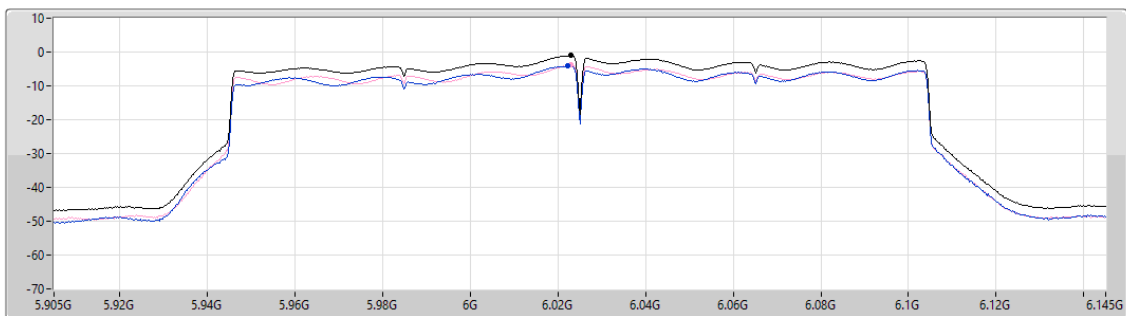

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.07	-1.07	-4.21	-3.85

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6105MHz

07/01/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.79

Detector Type
RMS

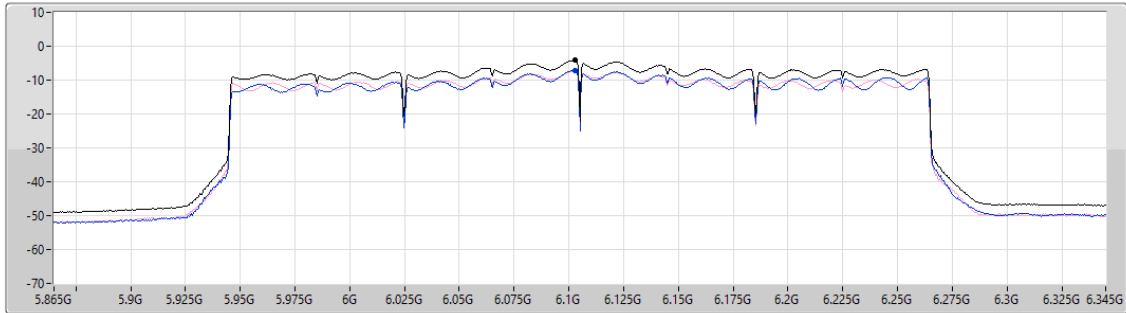

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.16	-4.16	-7.09	-7.25

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6855MHz

07/01/2026

CF (Hz)
6.855G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

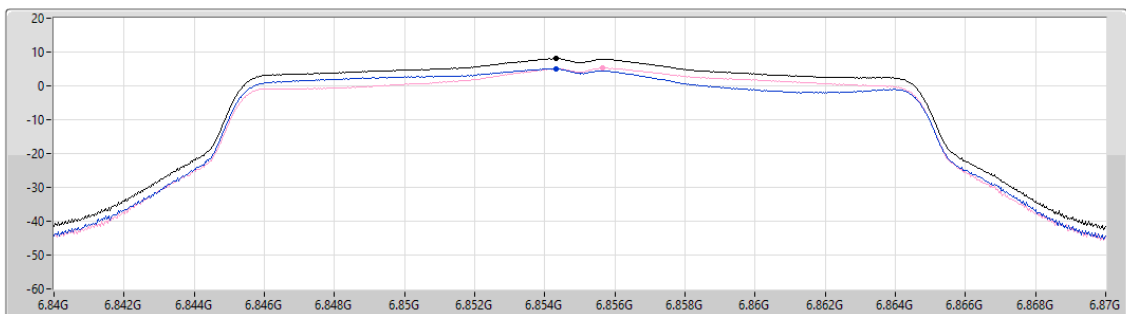

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.03	8.03	5.03	5.27

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6845MHz

07/01/2026

CF (Hz)
6.845G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

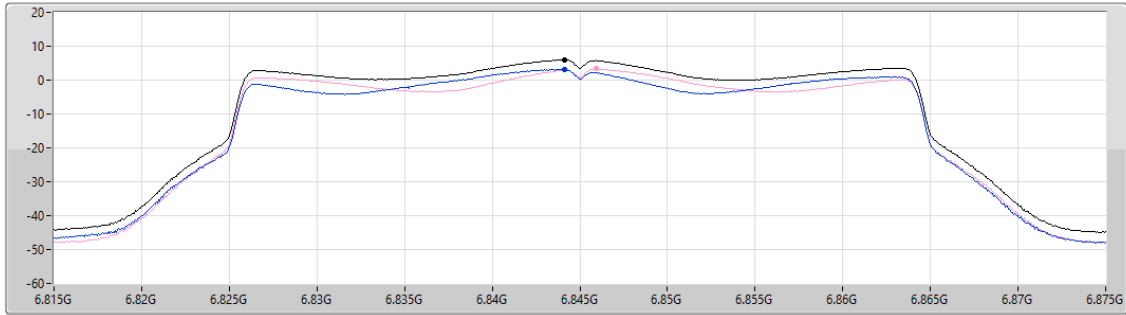

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
6.09	6.09	3.16	3.32

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6785MHz

07/01/2026

CF (Hz)
6.785G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

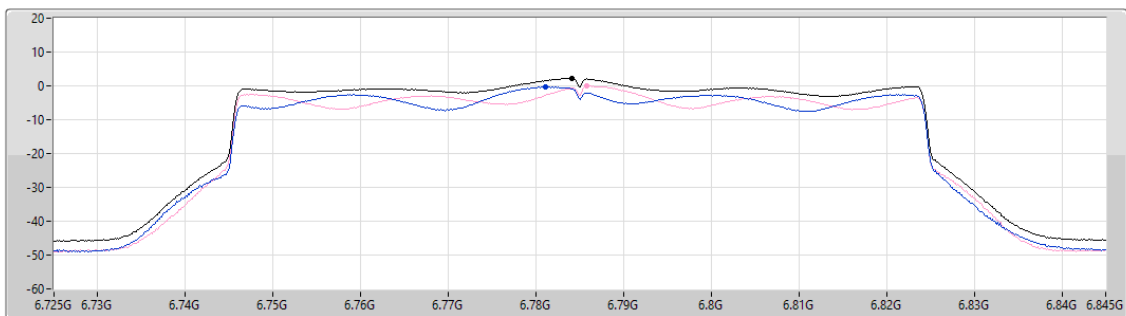


Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
2.26	2.26	-0.31	-0.05

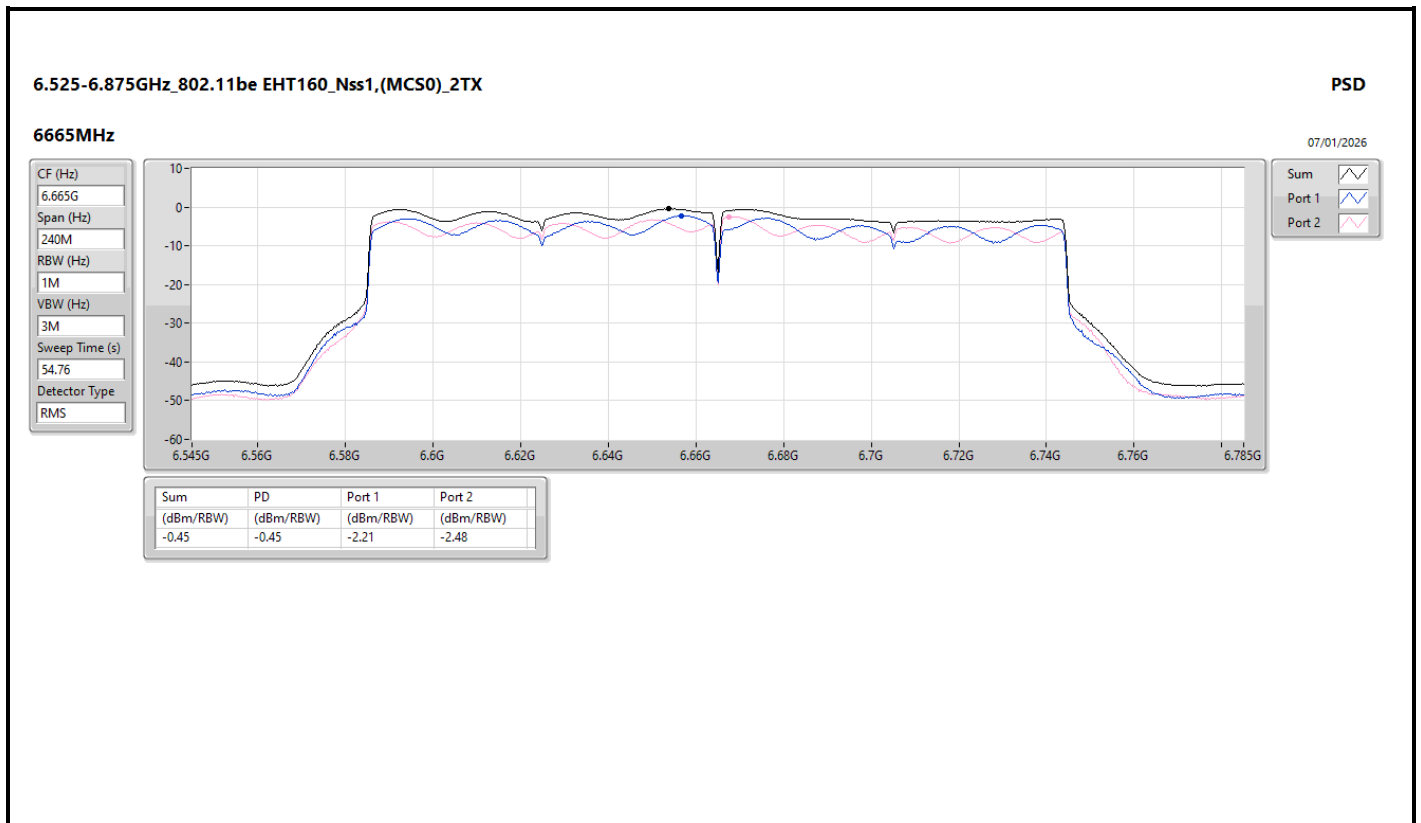



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	1.31	7.87
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-1.36	5.20
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-4.25	2.31

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.56	-2.21	-1.05	1.31	Inf	7.87	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.56	-4.14	-3.90	-1.36	Inf	5.20	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.56	-6.35	-7.75	-4.25	Inf	2.31	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5985MHz

15/01/2026

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
28.295
Detector Type
RMS

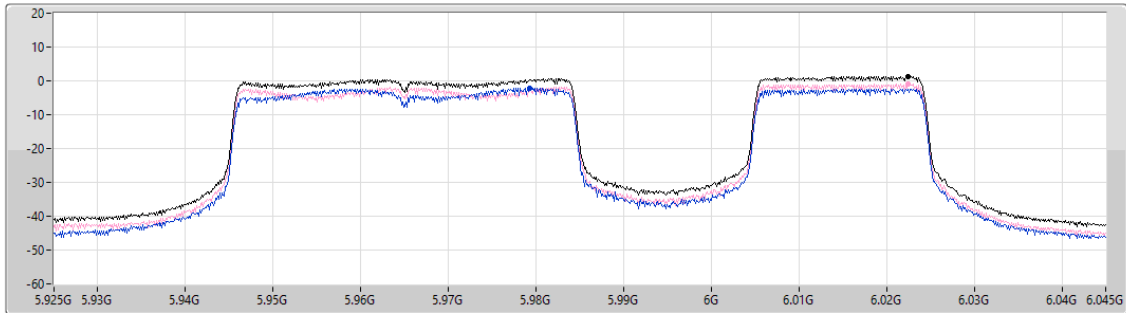

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.31	1.31	-2.21	-1.05


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

PSD

6025MHz


16/01/2026

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
19.348
Detector Type
RMS

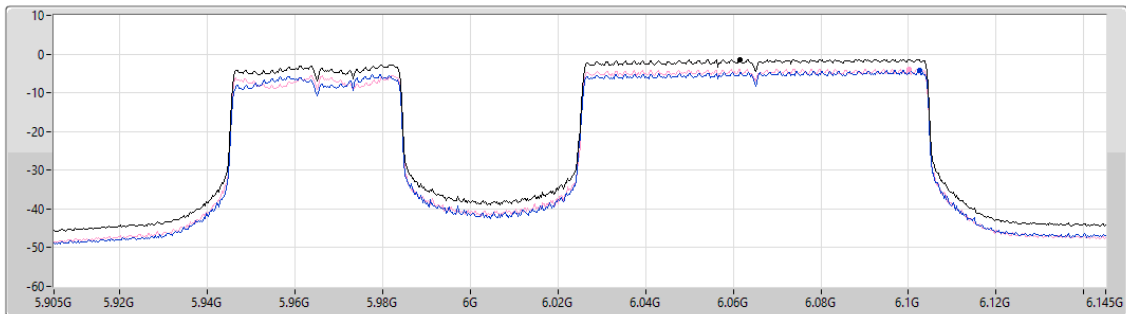

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.36	-1.36	-4.14	-3.90

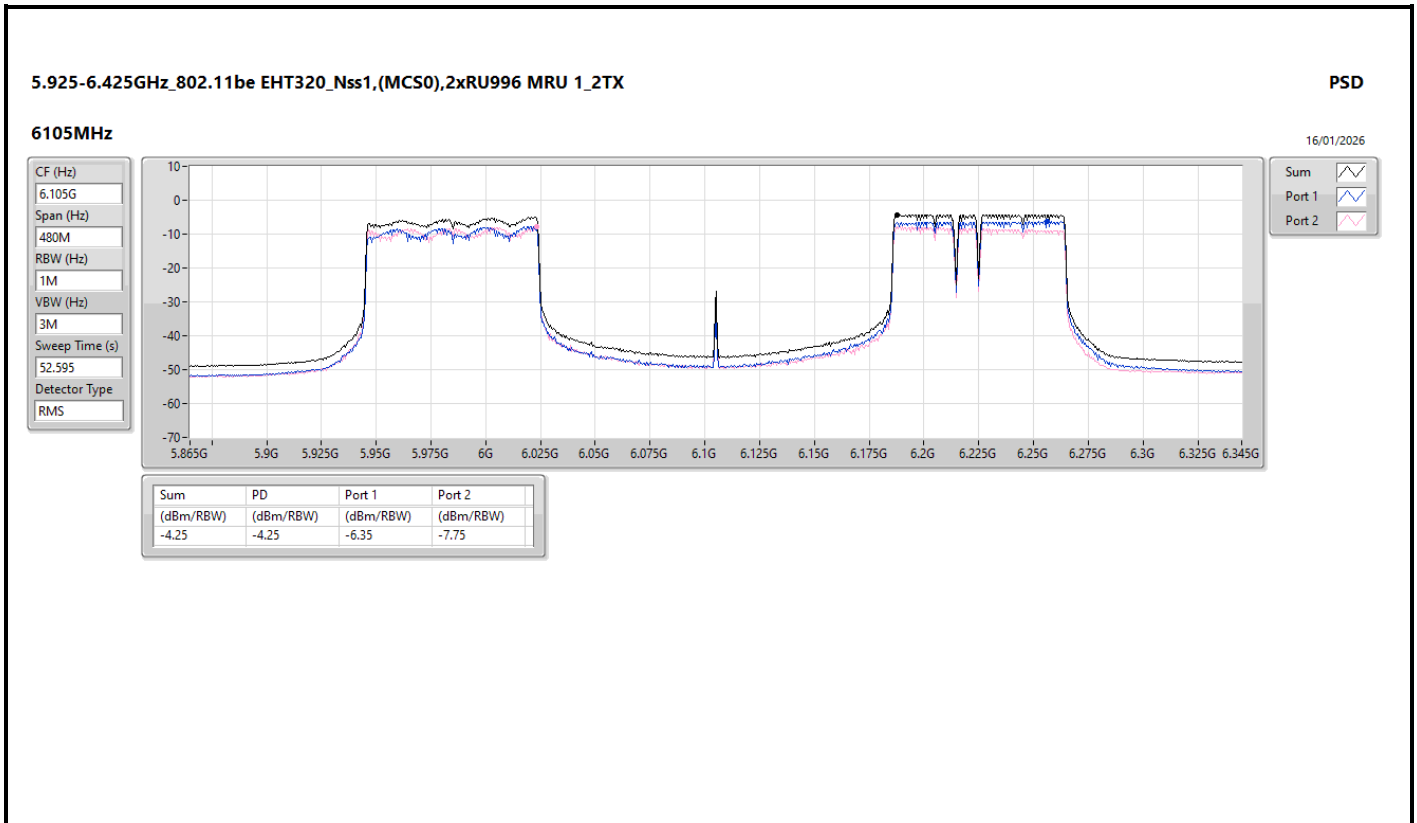



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	1.53	8.09
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	-1.34	5.22
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_2TX	-4.31	2.25

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.56	-2.36	-0.75	1.53	Inf	8.09	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.56	-4.29	-3.81	-1.34	Inf	5.22	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.56	-4.25	-3.78	-1.34	Inf	5.22	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.56	-7.60	-7.78	-4.70	Inf	1.86	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.56	-7.50	-7.77	-4.68	Inf	1.88	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.56	-7.26	-7.39	-4.31	Inf	2.25	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

PSD

5985MHz

14/01/2026

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

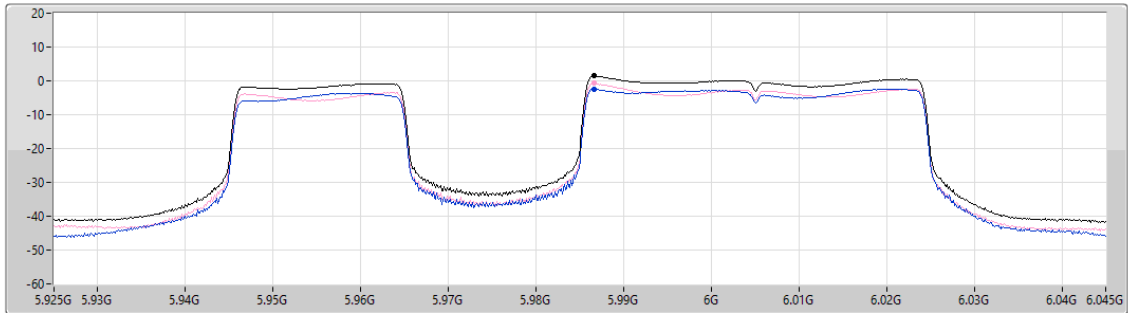

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.53	1.53	-2.36	-0.75


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX

PSD

6025MHz


15/01/2026

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

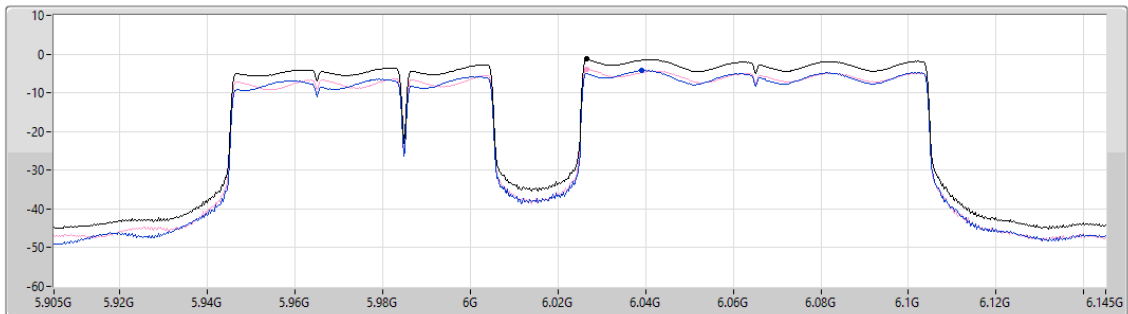

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.34	-1.34	-4.29	-3.81

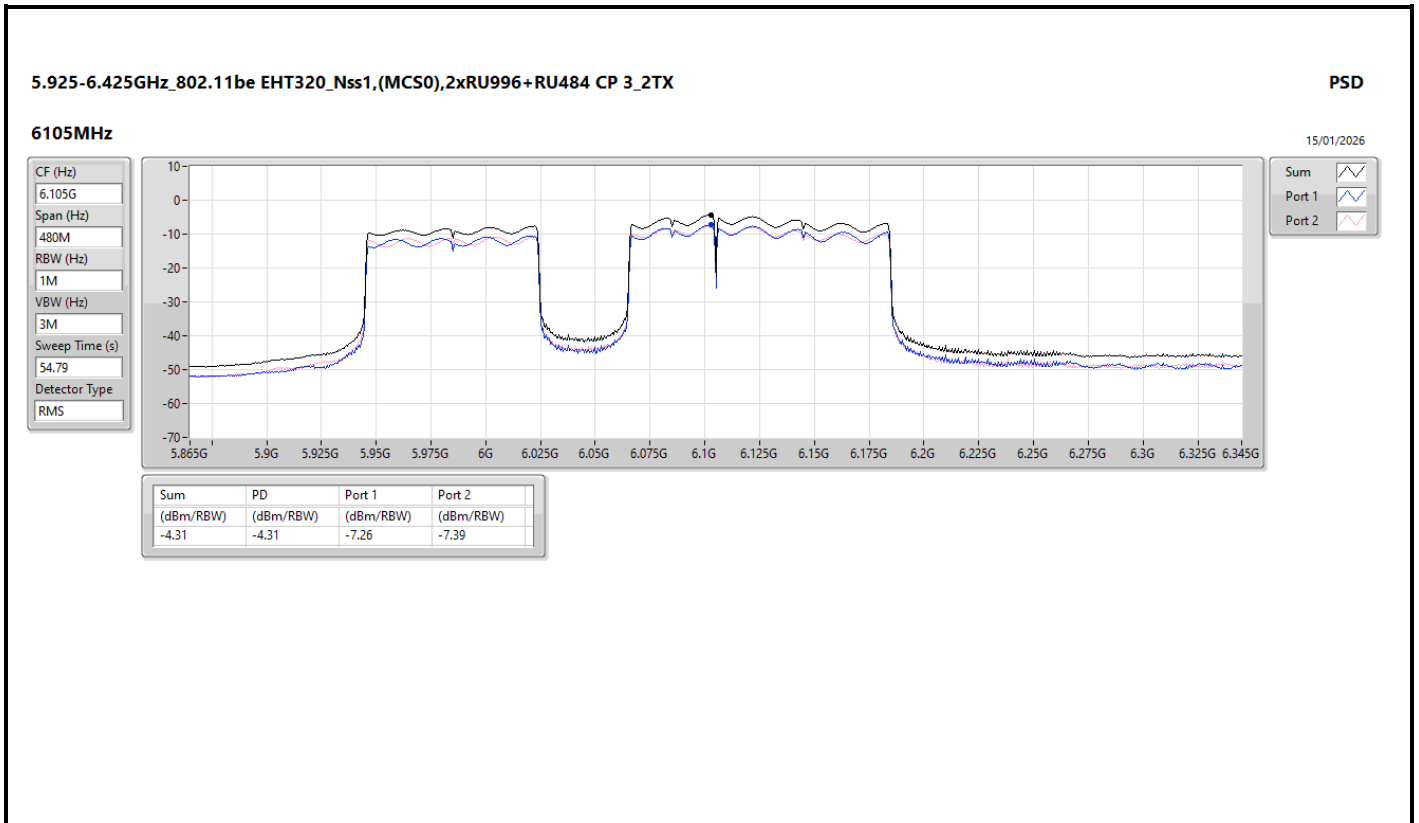



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	11.24	17.75
802.11be EHT40_Nss1,(MCS0)_2TX	9.00	15.51
802.11be EHT80_Nss1,(MCS0)_2TX	6.11	12.62
802.11be EHT160_Nss1,(MCS0)_2TX	2.20	8.71
802.11be EHT320_Nss1,(MCS0)_2TX	-0.28	6.23
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	8.90	15.41
802.11be EHT40_Nss1,(MCS0)_2TX	5.92	12.43
802.11be EHT80_Nss1,(MCS0)_2TX	3.69	10.20
802.11be EHT160_Nss1,(MCS0)_2TX	-0.79	5.72

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	6.51	7.45	8.89	11.24	Inf	17.75	23.00
6195MHz	Pass	6.51	8.31	7.16	10.76	Inf	17.27	23.00
6415MHz	Pass	6.51	7.14	5.26	9.28	Inf	15.79	23.00
6535MHz	Pass	6.51	5.92	6.79	8.90	Inf	15.41	23.00
6695MHz	Pass	6.51	3.26	5.76	7.01	Inf	13.52	23.00
6855MHz	Pass	6.51	4.60	5.14	7.76	Inf	14.27	23.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	6.51	4.41	5.38	7.92	Inf	14.43	23.00
6205MHz	Pass	6.51	6.60	5.31	9.00	Inf	15.51	23.00
6405MHz	Pass	6.51	4.42	2.21	6.43	Inf	12.94	23.00
6565MHz	Pass	6.51	2.57	4.01	5.92	Inf	12.43	23.00
6685MHz	Pass	6.51	0.81	3.39	4.57	Inf	11.08	23.00
6845MHz	Pass	6.51	1.89	2.29	4.94	Inf	11.45	23.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.51	2.03	2.45	5.12	Inf	11.63	23.00
6225MHz	Pass	6.51	3.83	2.54	6.11	Inf	12.62	23.00
6385MHz	Pass	6.51	2.72	0.77	4.62	Inf	11.13	23.00
6625MHz	Pass	6.51	-0.50	0.61	2.21	Inf	8.72	23.00
6705MHz	Pass	6.51	-1.02	0.54	1.77	Inf	8.28	23.00
6785MHz	Pass	6.51	0.53	1.63	3.69	Inf	10.20	23.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.51	-1.11	-1.26	1.77	Inf	8.28	23.00
6185MHz	Pass	6.51	-0.45	-1.00	2.20	Inf	8.71	23.00
6345MHz	Pass	6.51	-1.37	-2.75	0.39	Inf	6.90	23.00
6665MHz	Pass	6.51	-3.00	-2.26	-0.79	Inf	5.72	23.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.51	-3.46	-3.04	-0.28	Inf	6.23	23.00
6265MHz	Pass	6.51	-3.89	-4.79	-1.83	Inf	4.68	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5955MHz

08/01/2026

CF (Hz)
5.955G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.744
Detector Type
RMS

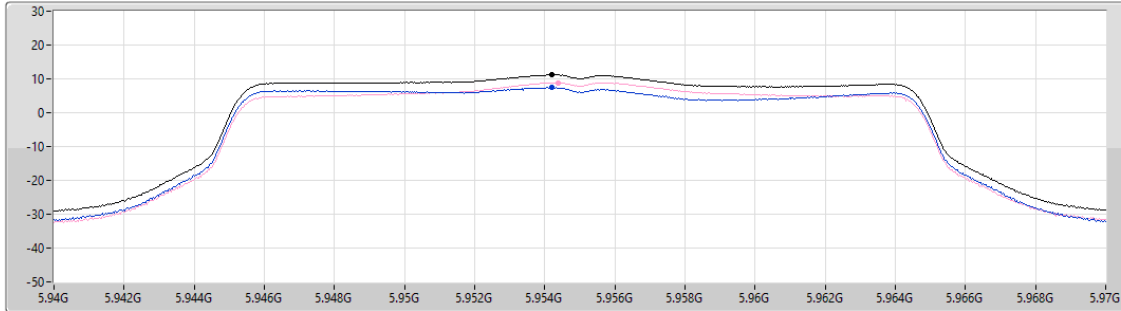

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
11.24	11.24	7.45	8.89


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6205MHz

08/01/2026

CF (Hz)
6.205G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.744
Detector Type
RMS

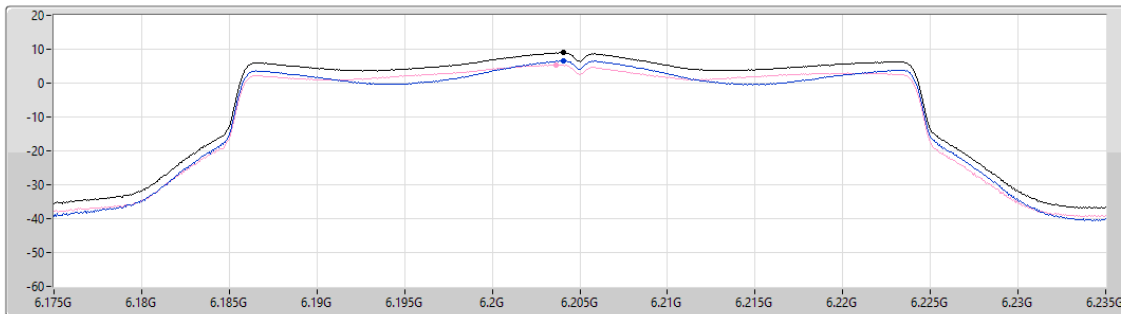

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.00	9.00	6.60	5.31


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6225MHz

08/01/2026

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.744
Detector Type
RMS

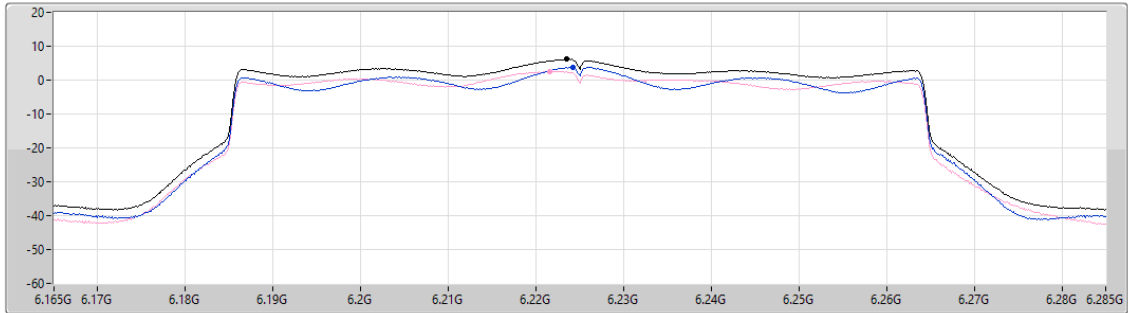

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.11	6.11	3.83	2.54


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6185MHz

08/01/2026

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.744
Detector Type
RMS

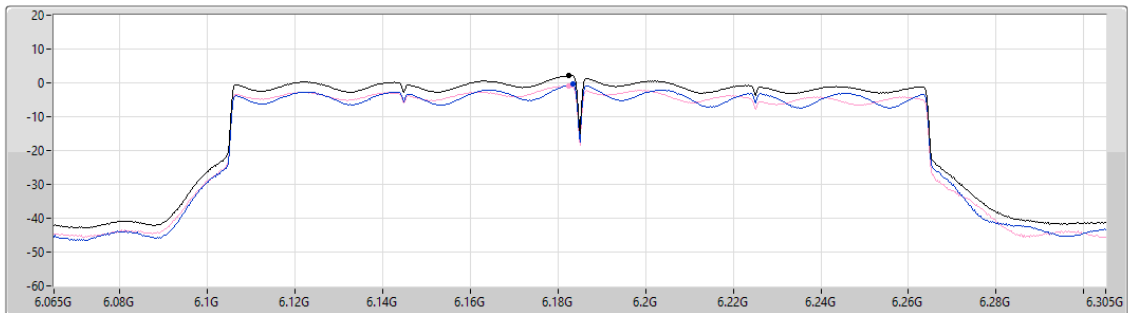

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.20	2.20	-0.45	-1.00

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6105MHz

08/01/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.784

Detector Type
RMS

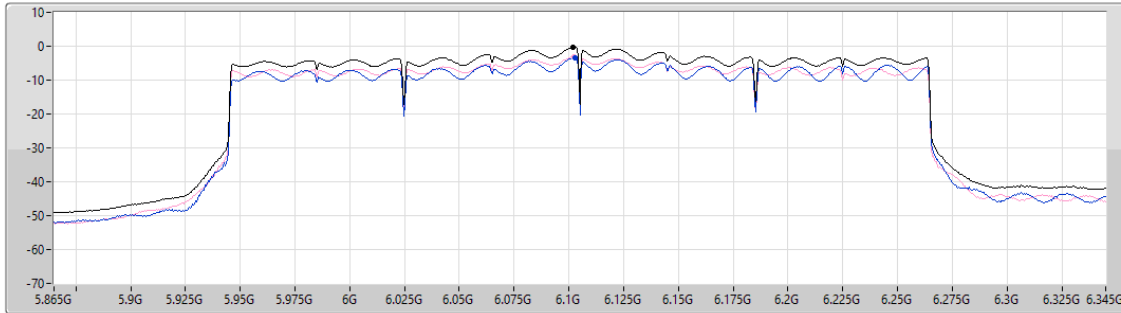

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.28	-0.28	-3.46	-3.04

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6535MHz

08/01/2026

CF (Hz)
6.535G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

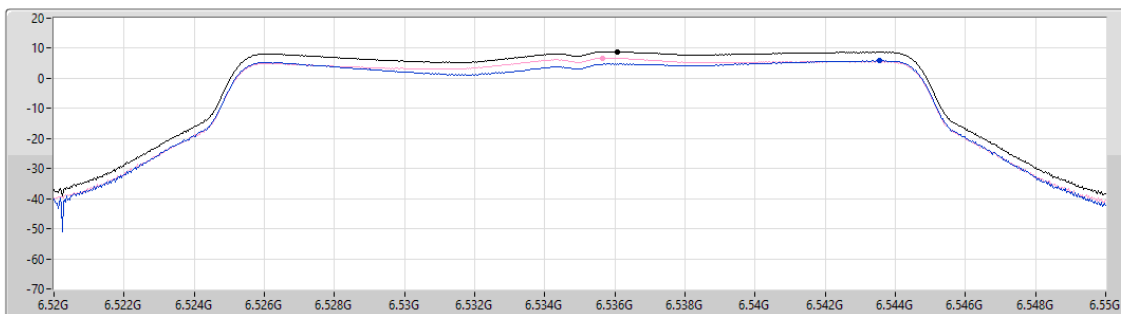

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.90	8.90	5.92	6.79

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6565MHz

08/01/2026

CF (Hz)
6.565G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

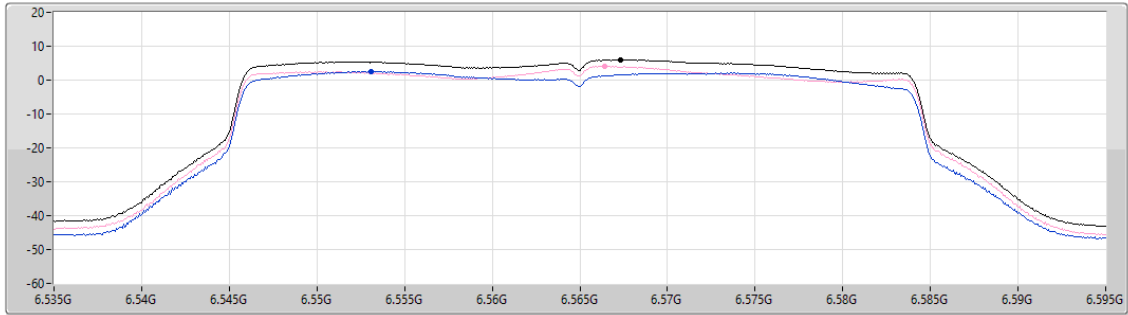

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.92	5.92	2.57	4.01

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6785MHz

08/01/2026

CF (Hz)
6.785G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

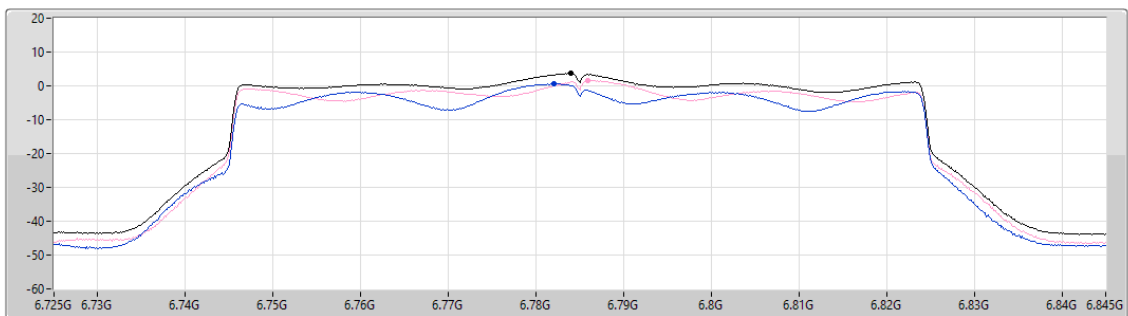

Sum ☒

Port 1 ☒

Port 2 ☒


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.69	3.69	0.53	1.63

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6665MHz

08/01/2026

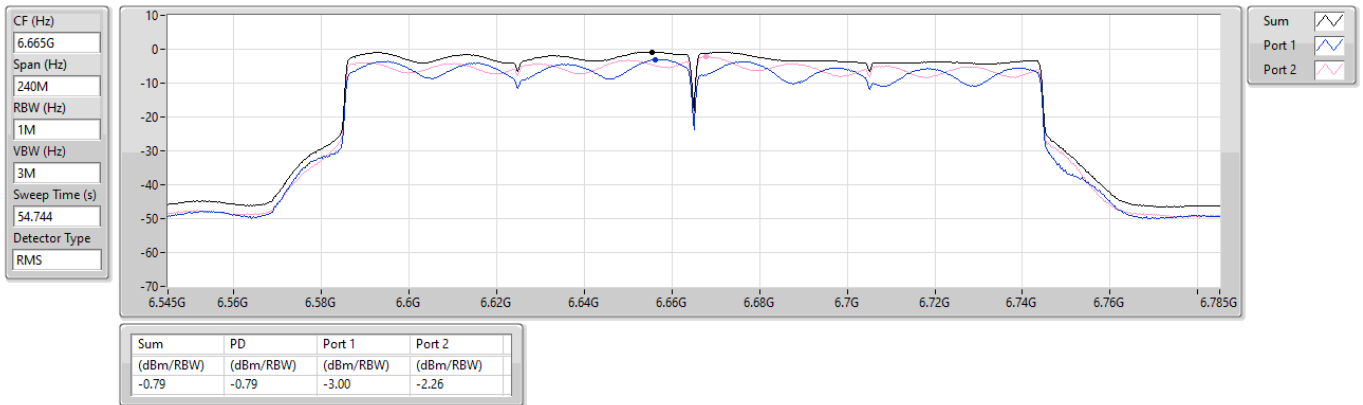



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	5.05	11.56
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	1.72	8.23
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-0.41	6.10

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.51	1.77	2.27	4.76	Inf	11.27	23.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.51	1.71	2.46	5.05	Inf	11.56	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.51	-1.59	-0.72	1.25	Inf	7.76	23.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.51	-1.25	-1.24	1.72	Inf	8.23	23.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.51	-1.10	-1.20	1.54	Inf	8.05	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.51	-3.22	-3.21	-0.41	Inf	6.10	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.51	-3.30	-3.28	-0.63	Inf	5.88	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.51	-2.76	-3.71	-0.51	Inf	6.00	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5985MHz

17/01/2026

CF (Hz)
5.985G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
28.295

Detector Type
RMS

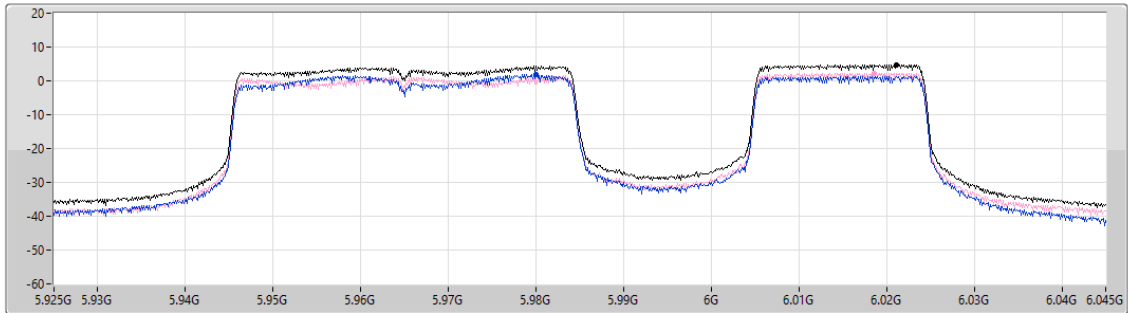

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.76	4.76	1.77	2.27

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

PSD

5985MHz

17/01/2026

CF (Hz)
5.985G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
28.279

Detector Type
RMS

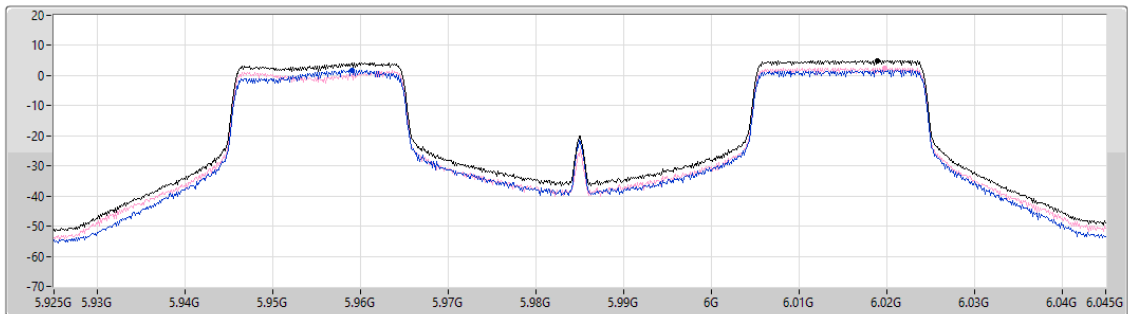

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.05	5.05	1.71	2.46

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

PSD

6025MHz

17/01/2026

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.348

Detector Type
RMS

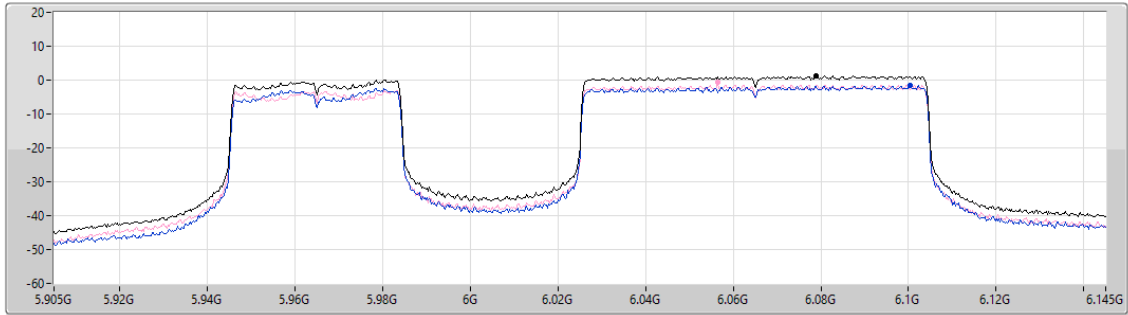

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.25	1.25	-1.59	-0.72

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

PSD

6025MHz

17/01/2026

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
28.439

Detector Type
RMS

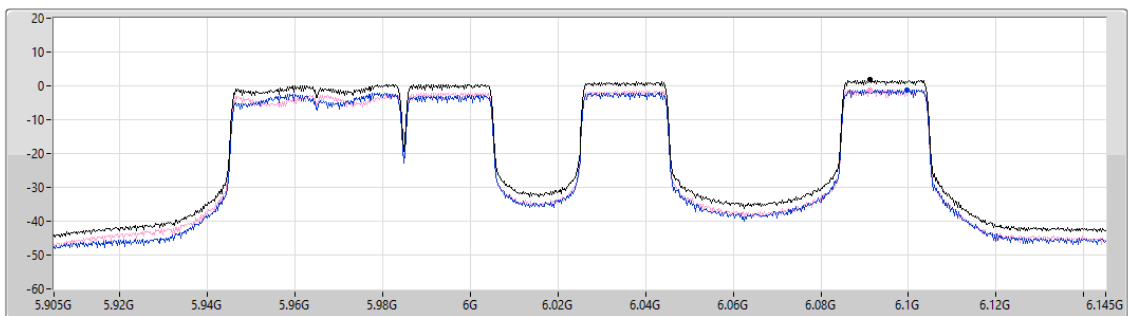

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.72	1.72	-1.25	-1.24

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

PSD

6025MHz

17/01/2026

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
18.081

Detector Type
RMS

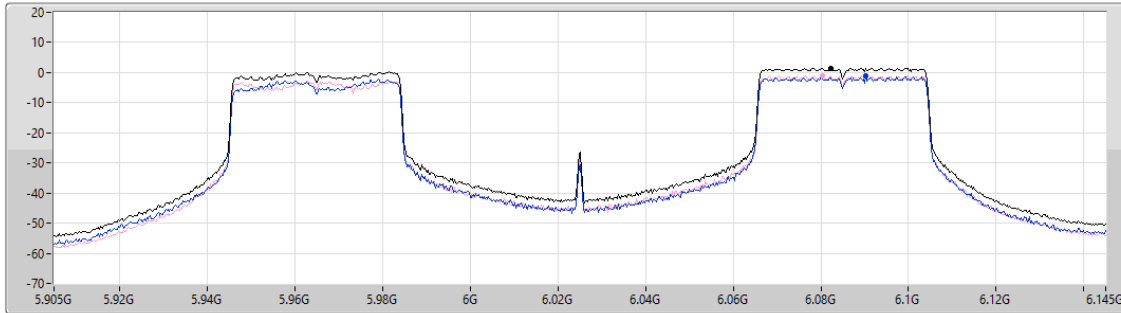

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.54	1.54	-1.10	-1.20

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX

PSD

6105MHz

17/01/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20.188

Detector Type
RMS

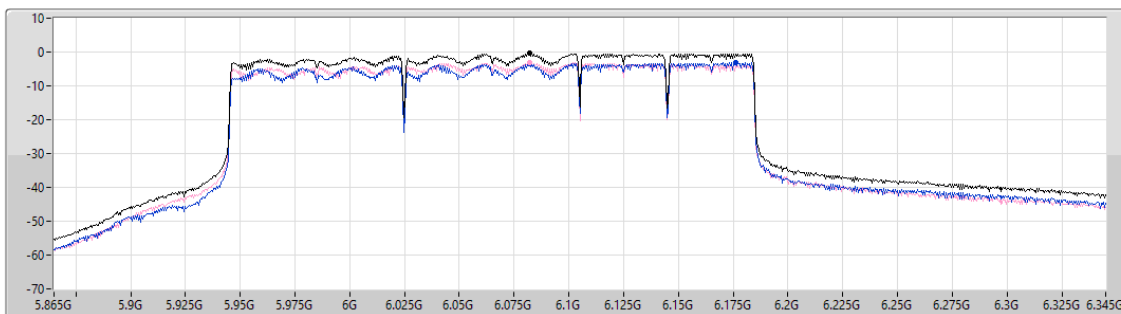

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.41	-0.41	-3.22	-3.21

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX

PSD

6105MHz

17/01/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.334

Detector Type
RMS

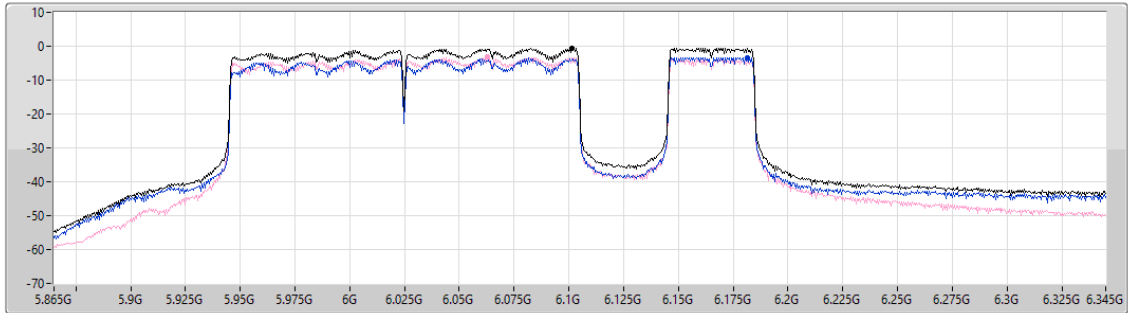

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.63	-0.63	-3.30	-3.28

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

PSD

6105MHz

17/01/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
52.595

Detector Type
RMS

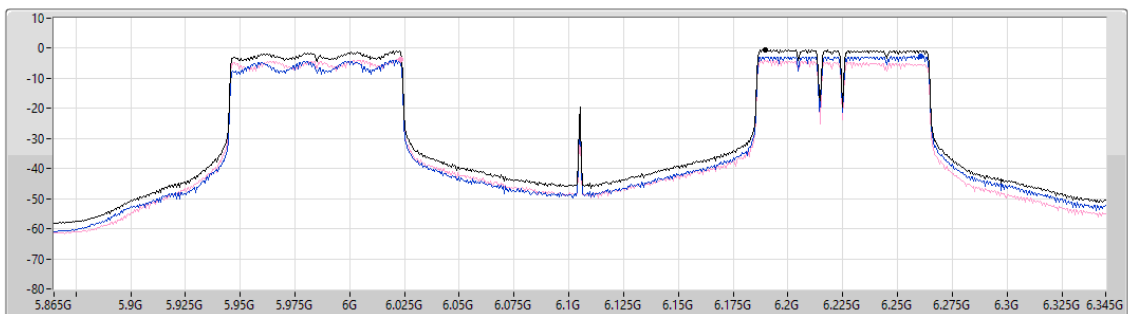

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.51	-0.51	-2.76	-3.71



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	4.71	11.22
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX	1.72	8.23
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	-0.30	6.21

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.51	1.01	2.39	4.71	Inf	11.22	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.51	-1.22	-1.22	1.72	Inf	8.23	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.51	-1.58	-1.15	1.31	Inf	7.82	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.51	-3.45	-3.12	-0.30	Inf	6.21	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.51	-3.54	-3.20	-0.36	Inf	6.15	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.51	-3.59	-3.22	-0.41	Inf	6.10	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

PSD

5985MHz

17/01/2026

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.74
Detector Type
RMS

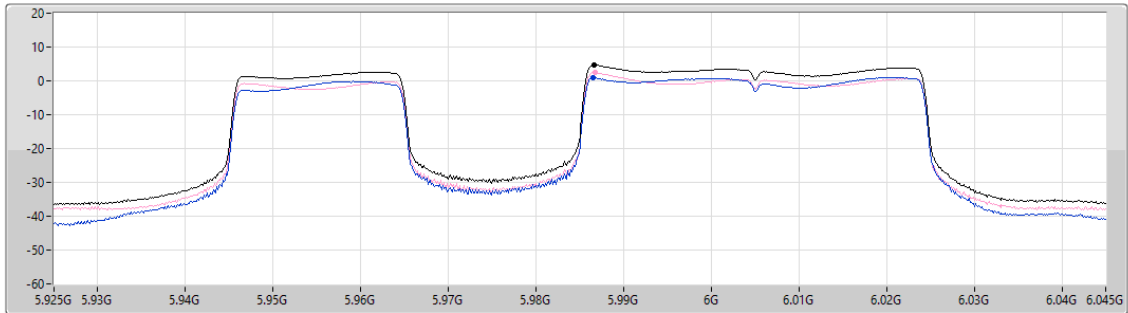

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.71	4.71	1.01	2.39

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX

PSD

6025MHz

17/01/2026

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.76
Detector Type
RMS

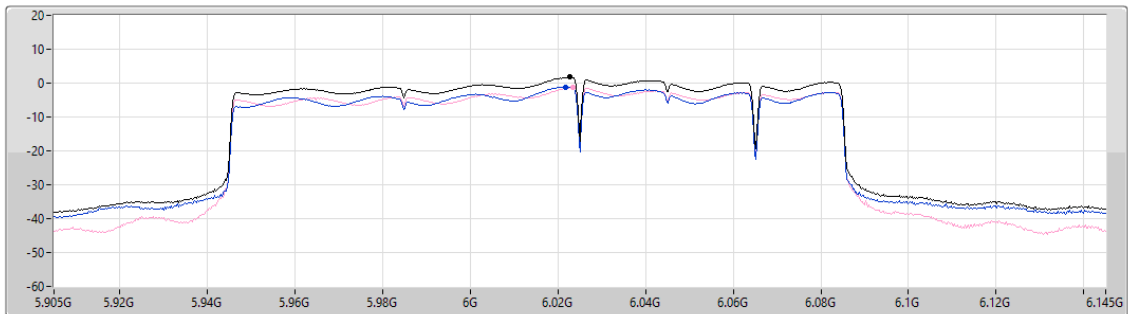

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.72	1.72	-1.22	-1.22

Sum
Port 1
Port 2

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX

PSD

6025MHz

17/01/2026

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.74

Detector Type
RMS

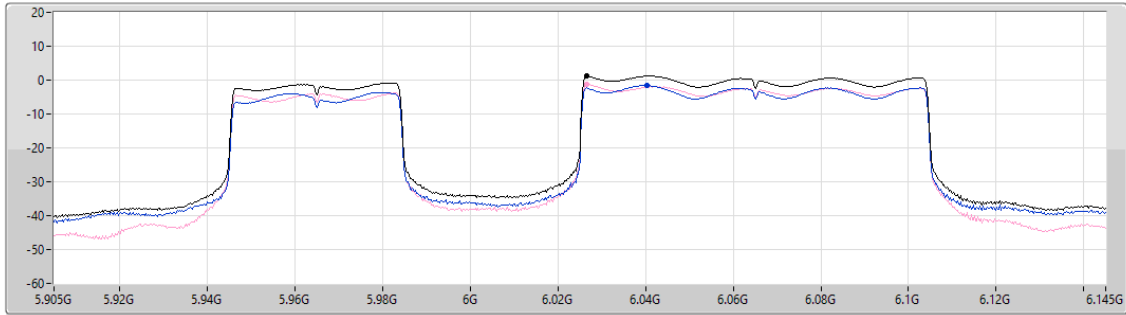

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.31	1.31	-1.58	-1.15

Sum ☒

Port 1 ☒

Port 2 ☒

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX

PSD

6105MHz

17/01/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.79

Detector Type
RMS

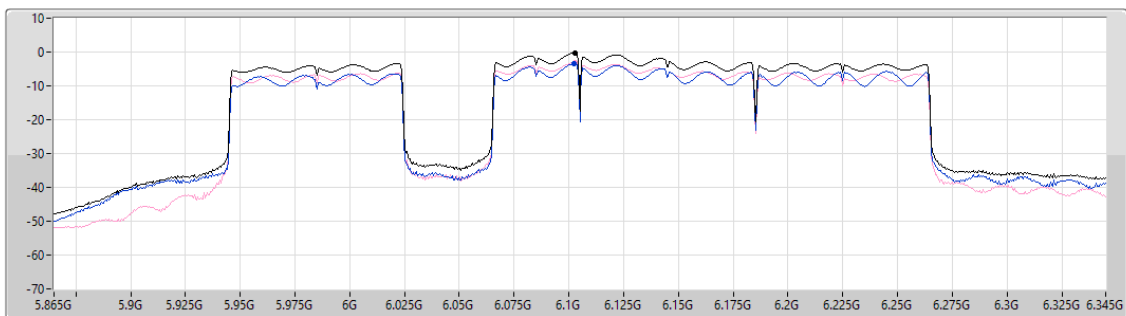

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.30	-0.30	-3.45	-3.12

Sum ☒

Port 1 ☒


Port 2 ☒

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX

PSD

6105MHz

17/01/2026

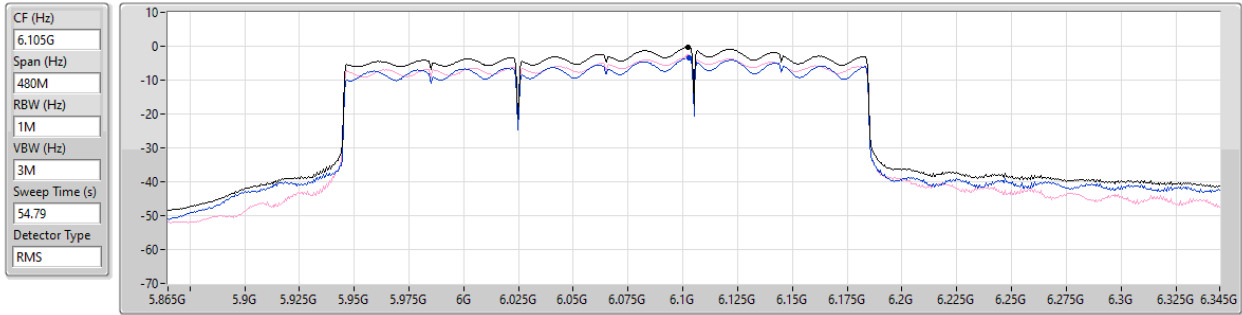


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.36	-0.36	-3.54	-3.20

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_2TX

PSD

6105MHz

17/01/2026

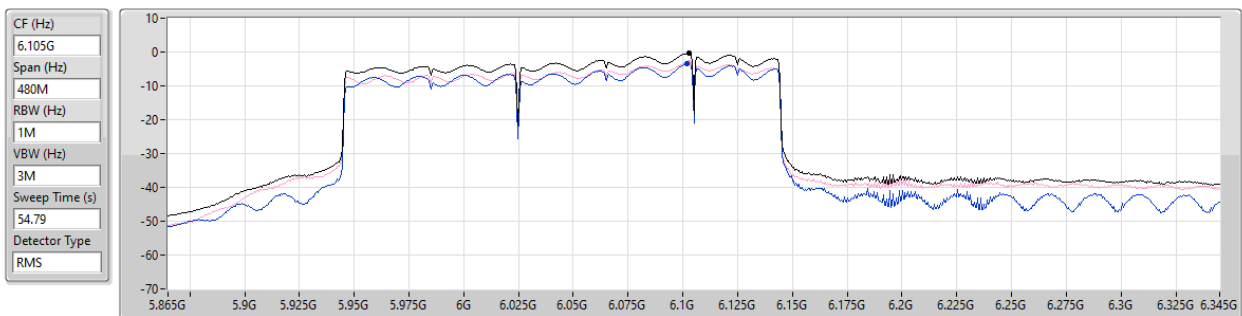

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.41	-0.41	-3.59	-3.22



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.416025G	1.28	6.426825G	-30.71	-18.85	-11.86	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.2034G	1.12	6.18285G	-28.93	-18.38	-10.55	2
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.3779G	-0.80	6.427G	-28.09	-20.86	-7.23	2
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.3486G	2.73	6.432G	-27.10	-16.87	-10.23	1
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	6.2594G	0.55	6.9882G	-49.85	-39.45	-10.40	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.85555G	2.66	6.8665G	-30.46	-17.41	-13.05	2
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.680201G	3.74	6.66285G	-26.44	-16.27	-10.17	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.7063G	2.16	6.7482G	-27.58	-17.88	-9.70	2
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.6696G	3.99	6.7518G	-28.20	-16.01	-12.19	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9545G	1.19	5.9674G	-32.06	-16.91	-15.15	1
5955MHz	Pass	5.954275G	2.66	5.96725G	-32.81	-17.47	-15.34	2
6195MHz	Pass	6.1946G	1.24	6.18275G	-35.62	-18.78	-16.84	1
6195MHz	Pass	6.194475G	-1.27	6.207G	-34.59	-20.17	-14.42	2
6415MHz	Pass	6.416025G	1.28	6.426825G	-30.71	-18.85	-11.86	1
6415MHz	Pass	6.423948G	-1.07	6.4023G	-35.98	-21.27	-14.71	2
6535MHz	Pass	6.544098G	1.48	6.52255G	-32.80	-18.55	-14.25	1
6535MHz	Pass	6.53575G	1.48	6.5226G	-33.45	-18.57	-14.88	2
6695MHz	Pass	6.686502G	1.48	6.682325G	-34.19	-18.59	-15.60	1
6695MHz	Pass	6.6965G	2.49	6.683225G	-31.04	-17.64	-13.40	2
6855MHz	Pass	6.854375G	1.95	6.8665G	-31.23	-17.95	-13.28	1
6855MHz	Pass	6.85555G	2.66	6.8665G	-30.46	-17.41	-13.05	2
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.9635G	3.16	5.98795G	-29.62	-16.86	-12.76	1
5965MHz	Pass	5.9639G	4.66	5.98795G	-27.96	-15.34	-12.62	2
6205MHz	Pass	6.204G	3.07	6.22855G	-32.55	-16.95	-15.60	1
6205MHz	Pass	6.2034G	1.12	6.18285G	-28.93	-18.38	-10.55	2
6405MHz	Pass	6.40625G	3.86	6.42855G	-30.04	-16.20	-13.84	1
6405MHz	Pass	6.407849G	1.56	6.42825G	-31.90	-18.45	-13.45	2
6565MHz	Pass	6.551453G	2.88	6.58795G	-29.97	-17.16	-12.81	1
6565MHz	Pass	6.568649G	3.61	6.5883G	-30.41	-16.44	-13.97	2
6685MHz	Pass	6.680201G	3.74	6.66285G	-26.44	-16.27	-10.17	1
6685MHz	Pass	6.68665G	4.95	6.70745G	-26.90	-15.05	-11.85	2
6845MHz	Pass	6.8439G	5.15	6.8221G	-28.86	-14.85	-14.01	1
6845MHz	Pass	6.8463G	5.15	6.86855G	-30.37	-14.89	-15.48	2
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9829G	0.52	6.1769G	-52.95	-39.48	-13.47	1
5985MHz	Pass	5.9833G	1.60	6.0284G	-28.16	-18.43	-9.73	2
6225MHz	Pass	6.2239G	0.81	6.1805G	-31.02	-19.22	-11.80	1
6225MHz	Pass	6.2233G	-0.90	6.1805G	-32.79	-20.91	-11.88	2
6385MHz	Pass	6.387G	1.30	6.4285G	-28.29	-18.73	-9.56	1
6385MHz	Pass	6.3779G	-0.80	6.427G	-28.09	-20.86	-7.23	2
6625MHz	Pass	6.6176G	1.80	6.5807G	-30.56	-18.23	-12.33	1
6625MHz	Pass	6.6278G	2.24	6.67G	-30.60	-17.76	-12.84	2
6705MHz	Pass	6.6988G	1.68	6.6611G	-28.22	-18.45	-9.77	1
6705MHz	Pass	6.7063G	2.16	6.7482G	-27.58	-17.88	-9.70	2
6785MHz	Pass	6.7817G	1.77	6.7415G	-28.58	-18.26	-10.32	1
6785MHz	Pass	6.7875G	2.01	6.8289G	-29.20	-17.99	-11.21	2
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.021G	2.27	6.113G	-30.41	-17.76	-12.65	1
6025MHz	Pass	6.0222G	2.12	6.1122G	-28.82	-17.92	-10.90	2
6185MHz	Pass	6.181G	1.71	6.0982G	-29.28	-18.31	-10.97	1
6185MHz	Pass	6.1818G	0.48	6.0976G	-31.42	-19.54	-11.88	2
6345MHz	Pass	6.3486G	2.73	6.432G	-27.10	-16.87	-10.23	1
6345MHz	Pass	6.3368G	1.72	6.4332G	-28.90	-18.31	-10.59	2
6665MHz	Pass	6.6572G	4.26	6.3958G	-48.39	-35.74	-12.65	1
6665MHz	Pass	6.6696G	3.99	6.7518G	-28.20	-16.01	-12.19	2
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.0998G	1.12	6.6242G	-49.96	-38.88	-11.08	1
6105MHz	Pass	6.099G	0.70	6.6242G	-49.72	-39.30	-10.42	2
6265MHz	Pass	6.24421G	1.15	6.993G	-49.95	-38.85	-11.10	1
6265MHz	Pass	6.2594G	0.55	6.9882G	-49.85	-39.45	-10.40	2


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6415MHz_TX

07/01/2026

CF (Hz)
6.415G
Span (Hz)
100M
RBW (Hz)
300k
VBW (Hz)
1M
Sweep Time (s)
4.01m
Detector Type
RMS

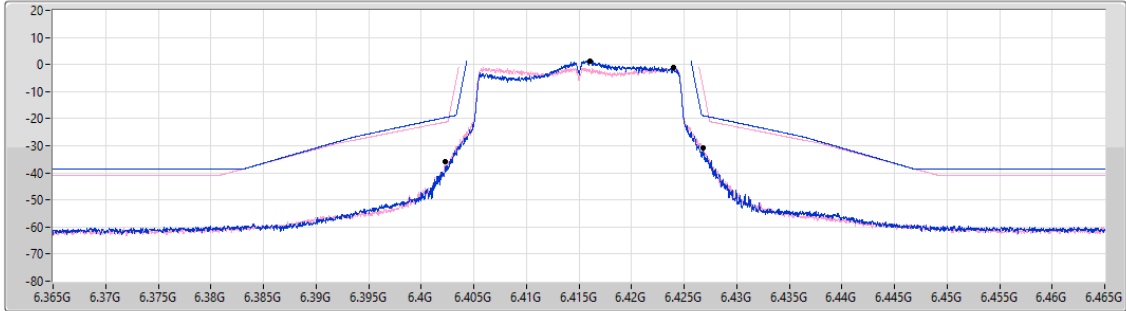

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.416025G	1.28	6.426825G	-30.71	-18.85	-11.86	1
6.423948G	-1.07	6.4023G	-35.98	-21.27	-14.71	2


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6205MHz_TX

07/01/2026

CF (Hz)
6.205G
Span (Hz)
200M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.01m
Detector Type
RMS

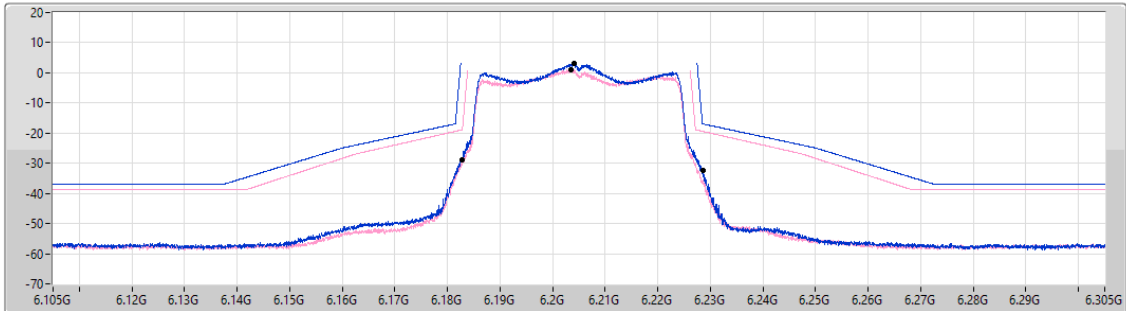


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.204G	3.07	6.22855G	-32.55	-16.95	-15.60	1
6.2034G	1.12	6.18285G	-28.93	-18.38	-10.55	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6385MHz_TX

07/01/2026

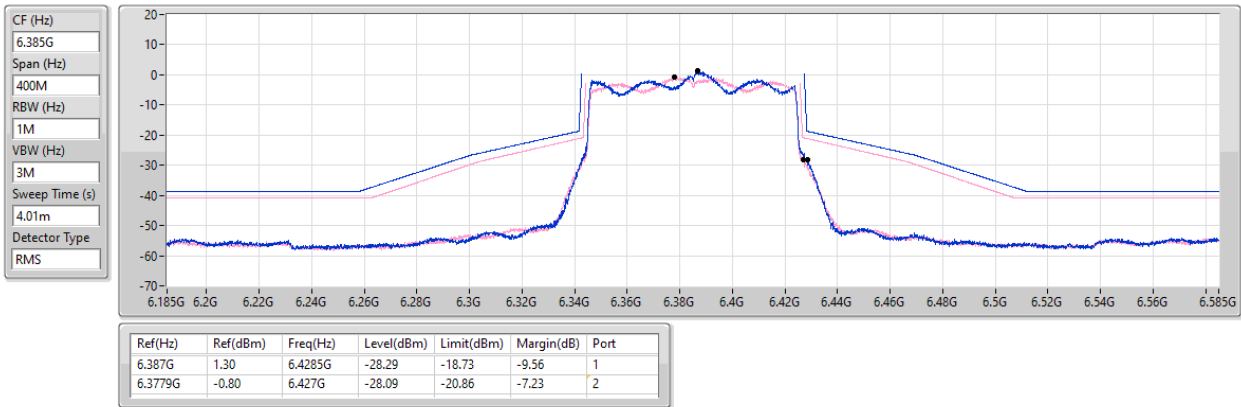


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6345MHz_TX

07/01/2026

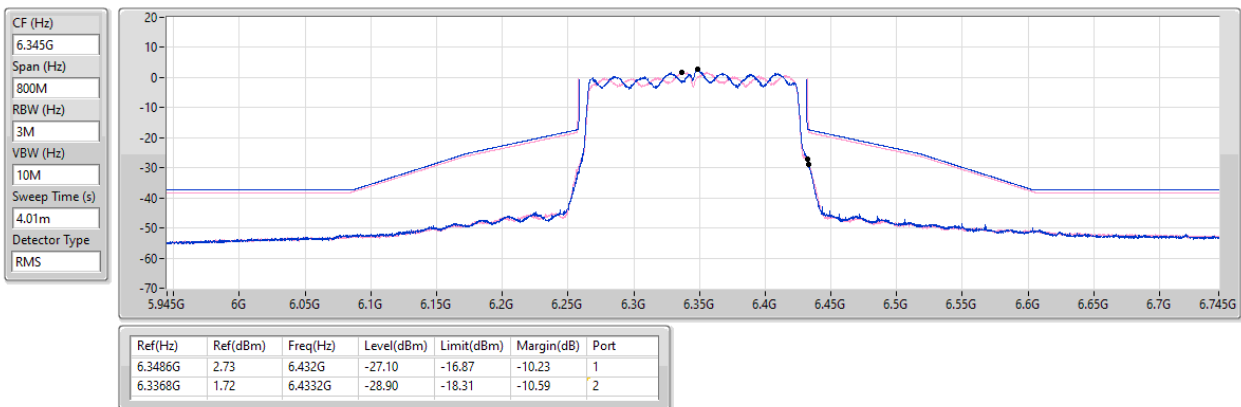


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6265MHz_TX

07/01/2026

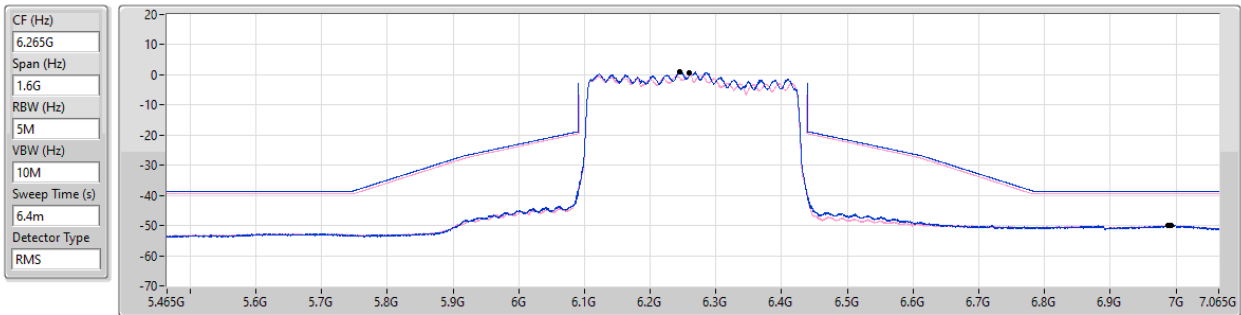


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.24421G	1.15	6.993G	-49.95	-38.85	-11.10	1
6.2594G	0.55	6.9882G	-49.85	-39.45	-10.40	2

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6855MHz_TX

07/01/2026

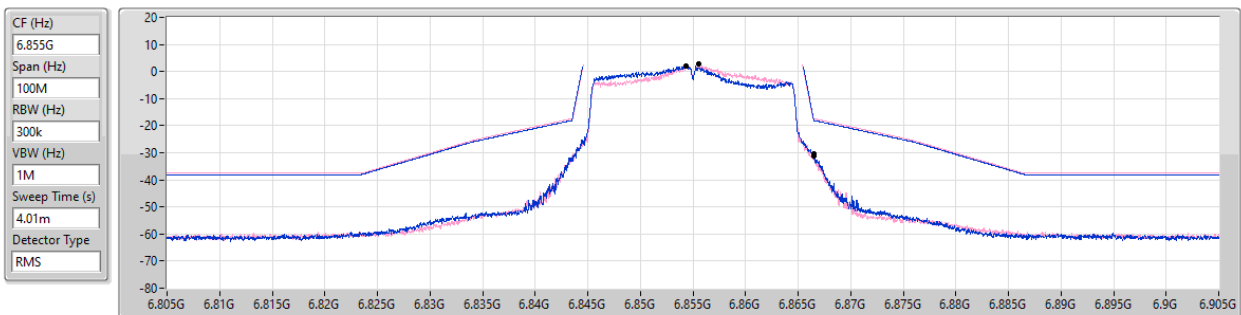


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.854375G	1.95	6.8665G	-31.23	-17.95	-13.28	1
6.85555G	2.66	6.8665G	-30.46	-17.41	-13.05	2

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6685MHz_TX

07/01/2026

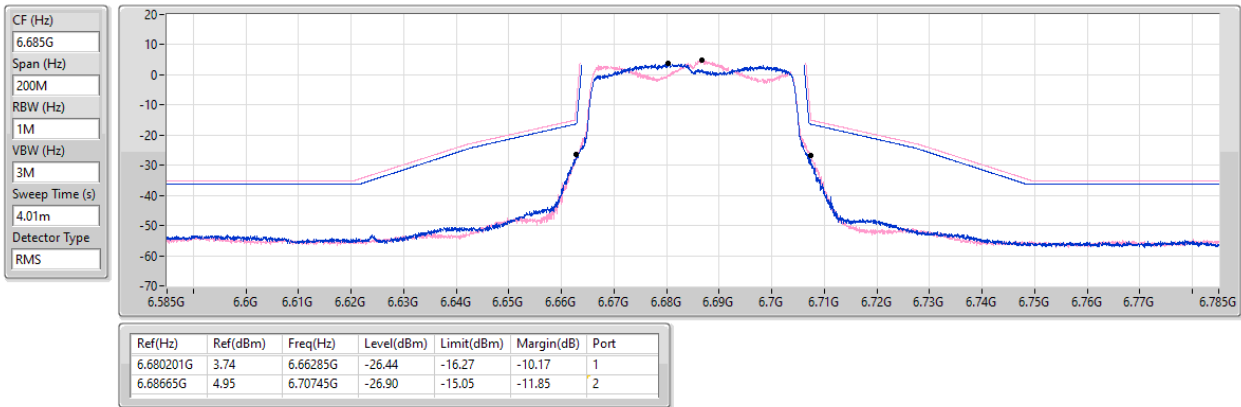



6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6705MHz_TX

07/01/2026

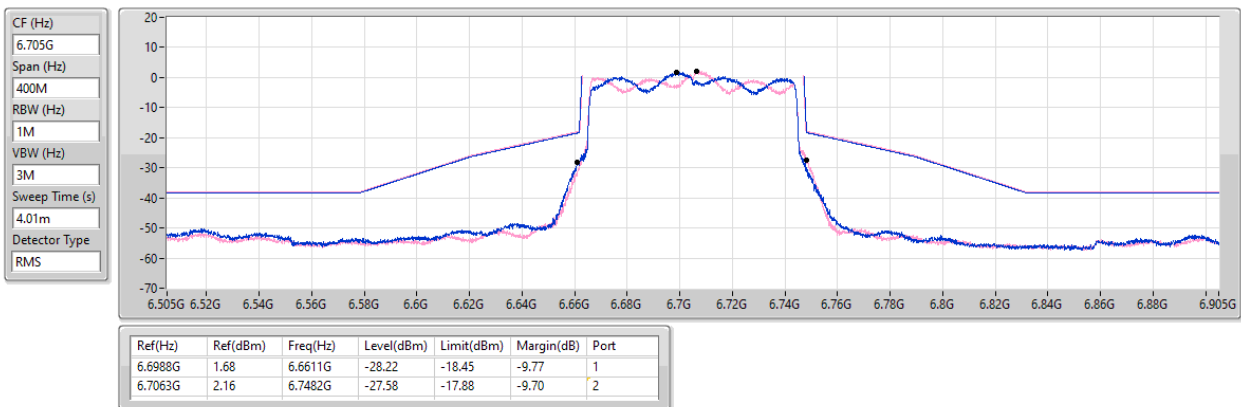

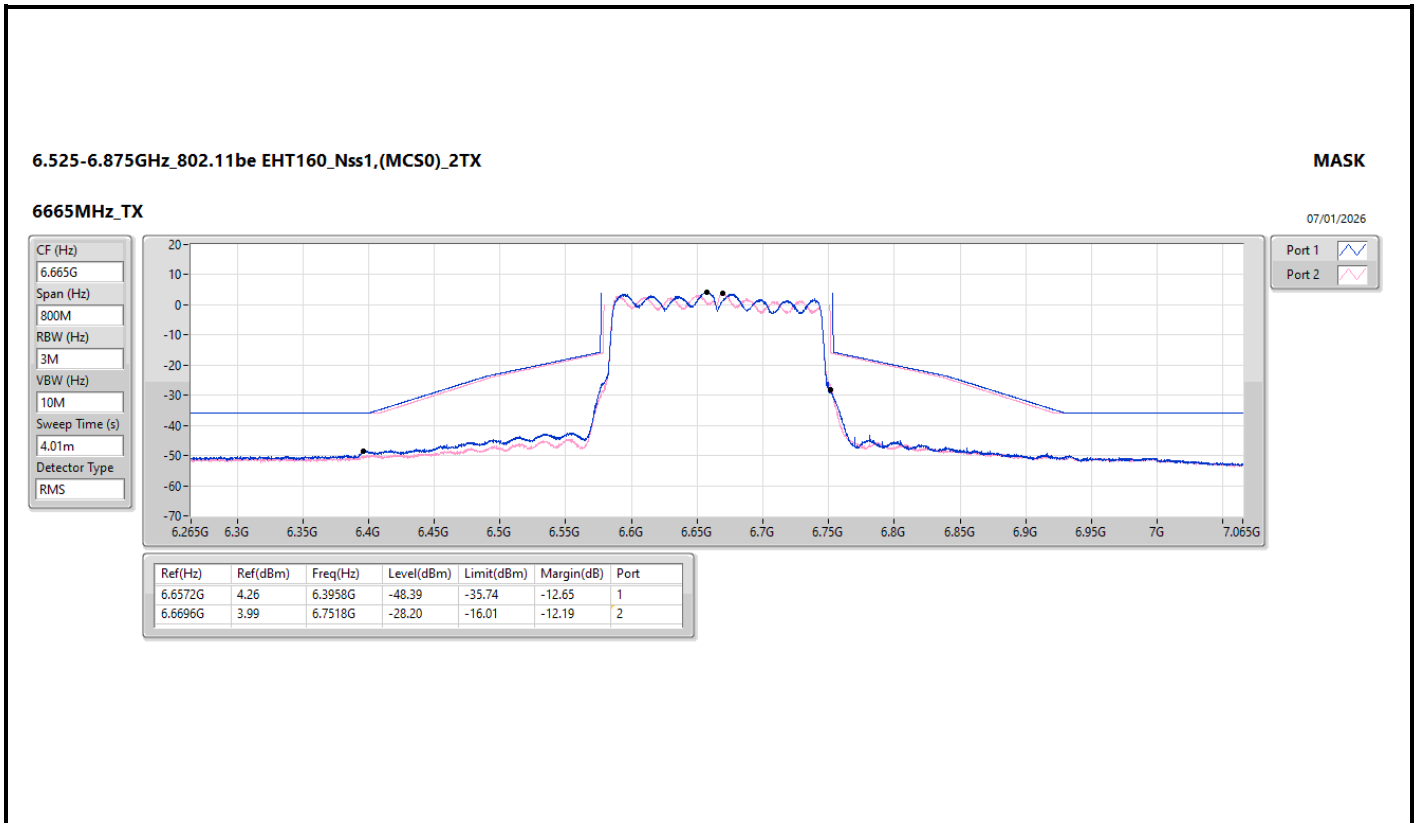



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	Pass	5.9814G	-0.72	6.125G	-50.63	-40.72	-9.91	1
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	Pass	6.09898G	2.44	6.28G	-46.91	-36.86	-10.05	1
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	Pass	6.25416G	2.08	6.5066G	-40.44	-30.67	-9.77	1

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9814G	-0.72	6.125G	-50.63	-40.72	-9.91	1
5985MHz	Pass	6.01449G	0.69	6.1216G	-50.40	-39.31	-11.09	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.09898G	2.44	6.28G	-46.91	-36.86	-10.05	1
6025MHz	Pass	6.0414G	2.22	6.2694G	-47.24	-35.96	-11.28	2
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.25416G	2.08	6.5066G	-40.44	-30.67	-9.77	1
6105MHz	Pass	6.19138G	0.62	6.623G	-49.99	-39.38	-10.61	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

MASK

5985MHz_TX

15/01/2026

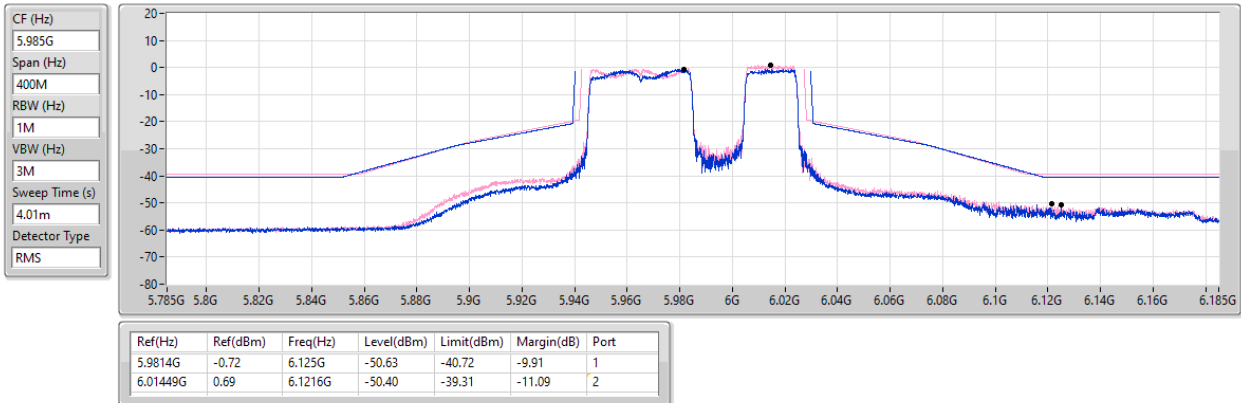



5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

MASK

6025MHz_TX

16/01/2026

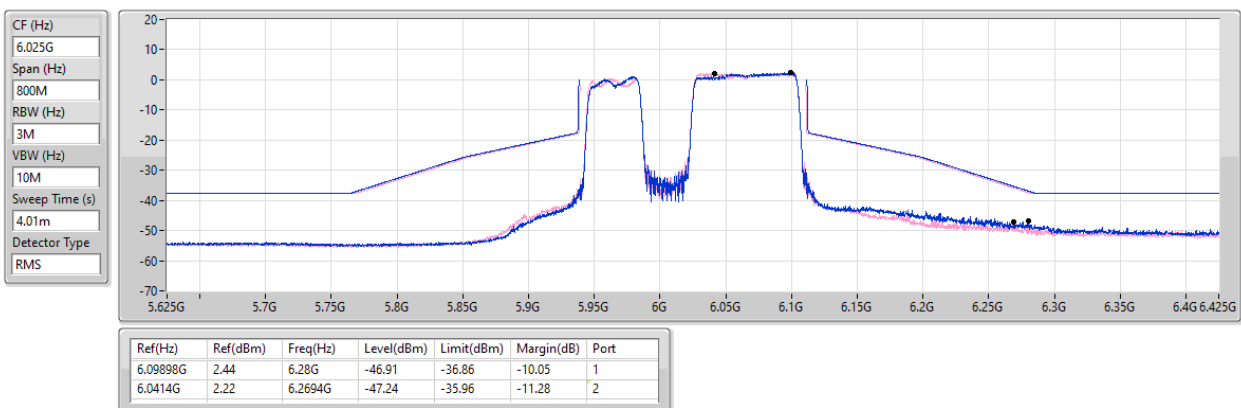

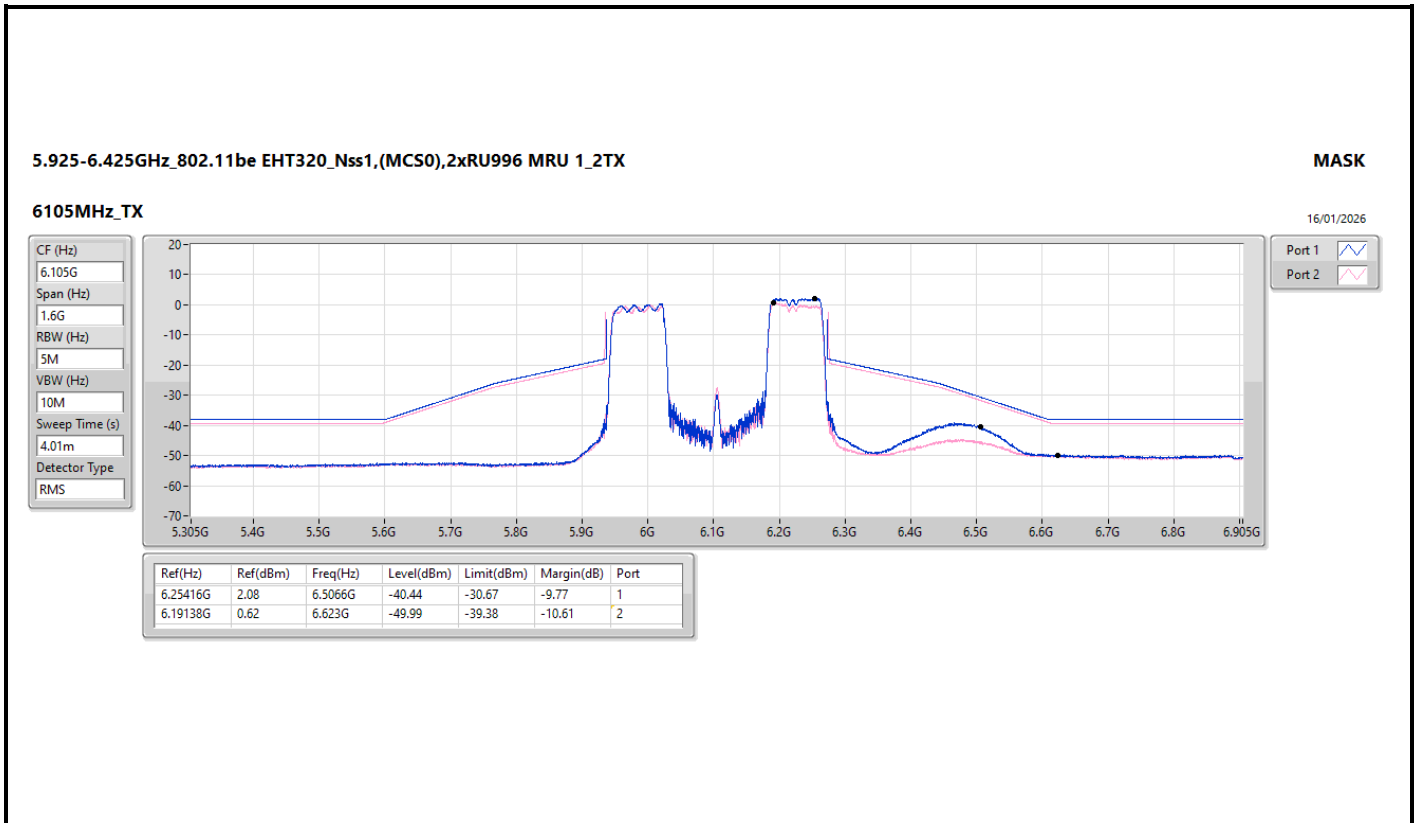



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	Pass	6.02129G	-0.15	6.1228G	-49.35	-40.15	-9.20	1
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	Pass	6.0404G	2.41	6.2868G	-46.05	-37.59	-8.46	1
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	Pass	6.1226G	0.78	6.5914G	-42.93	-37.59	-5.34	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.02129G	-0.15	6.1228G	-49.35	-40.15	-9.20	1
5985MHz	Pass	5.9871G	1.19	6.1226G	-49.05	-38.81	-10.24	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0404G	2.41	6.2868G	-46.05	-37.59	-8.46	1
6025MHz	Pass	6.0286G	2.22	6.2814G	-46.67	-37.64	-9.03	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0386G	2.56	6.2904G	-47.96	-37.44	-10.52	1
6025MHz	Pass	6.0286G	2.44	6.28G	-48.74	-37.22	-11.52	2
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1202G	0.96	6.6186G	-49.39	-39.04	-10.35	1
6105MHz	Pass	6.121G	0.89	6.6262G	-49.53	-39.11	-10.42	2
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1214G	1.02	6.5942G	-43.88	-38.00	-5.88	1
6105MHz	Pass	6.1226G	0.78	6.5914G	-42.93	-37.59	-5.34	2
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1014G	1.09	6.615G	-48.64	-38.91	-9.73	1
6105MHz	Pass	6.1226G	0.68	6.5934G	-47.09	-37.83	-9.26	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

MASK

5985MHz_TX

15/01/2026

CF (Hz)
5.985G


Span (Hz)
400M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
4.01m

Detector Type
RMS

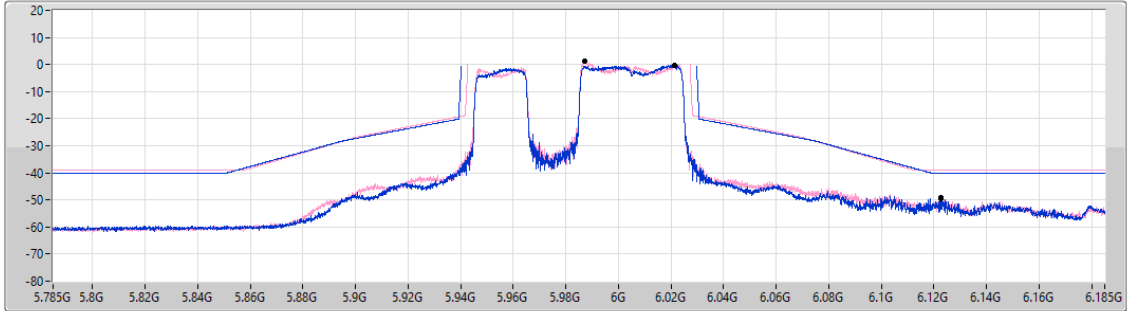

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.02129G	-0.15	6.1228G	-49.35	-40.15	-9.20	1
5.9871G	1.19	6.1226G	-49.05	-38.81	-10.24	2

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX

MASK

6025MHz_TX

15/01/2026

CF (Hz)
6.025G


Span (Hz)
800M

RBW (Hz)
3M


VBW (Hz)
10M

Sweep Time (s)
4.01m

Detector Type
RMS

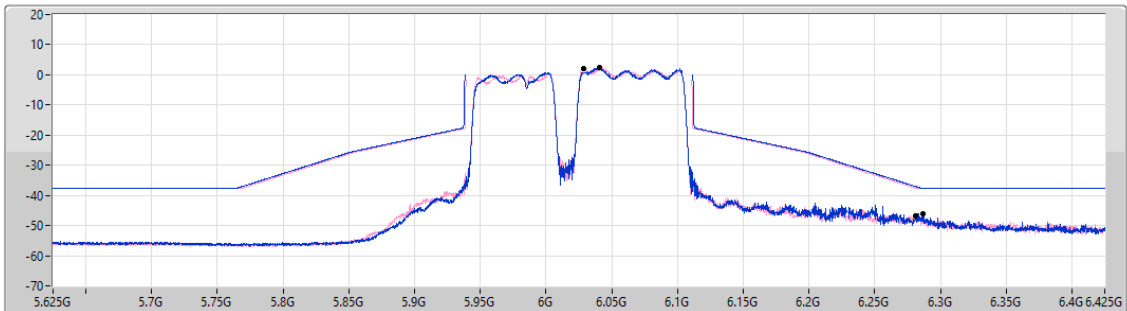

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.0404G	2.41	6.2868G	-46.05	-37.59	-8.46	1
6.0286G	2.22	6.2814G	-46.67	-37.64	-9.03	2

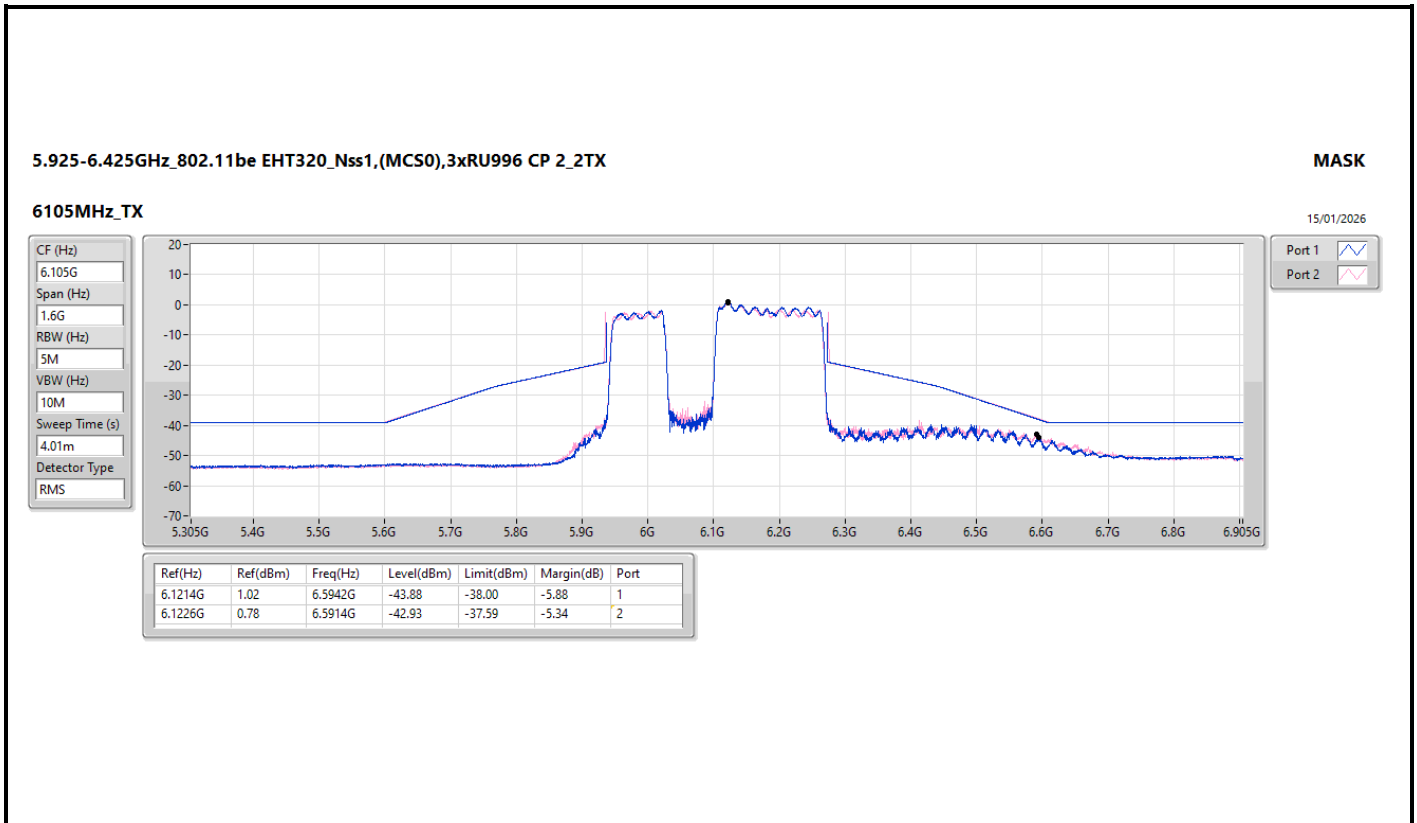

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	5.95455G	4.31	5.967325G	-28.32	-15.59	-12.73	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.408549G	4.05	6.42745G	-26.22	-15.97	-10.25	2
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.2238G	5.65	6.1818G	-23.52	-14.39	-9.13	1
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.3384G	3.73	6.4314G	-25.37	-16.27	-9.10	2
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	6.101G	4.85	6.6114G	-45.93	-35.15	-10.78	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.854225G	1.52	6.866275G	-30.66	-18.28	-12.38	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.68605G	5.27	6.7075G	-26.56	-14.77	-11.79	2
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.6277G	2.58	6.6685G	-27.31	-17.43	-9.88	2
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.6568G	3.63	6.5768G	-28.03	-16.38	-11.65	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.95455G	4.31	5.967325G	-28.32	-15.59	-12.73	1
5955MHz	Pass	5.9557G	6.41	5.9667G	-26.46	-13.61	-12.85	2
6195MHz	Pass	6.194375G	5.46	6.206575G	-28.54	-14.57	-13.97	1
6195MHz	Pass	6.194675G	4.44	6.182725G	-30.51	-15.69	-14.82	2
6415MHz	Pass	6.416125G	4.29	6.426875G	-29.94	-15.72	-14.22	1
6415MHz	Pass	6.4154G	2.60	6.42725G	-30.61	-16.90	-13.71	2
6535MHz	Pass	6.543323G	3.26	6.52275G	-30.43	-16.74	-13.69	1
6535MHz	Pass	6.5356G	3.78	6.522725G	-30.01	-16.28	-13.73	2
6695MHz	Pass	6.686027G	0.32	6.682375G	-34.60	-19.71	-14.89	1
6695MHz	Pass	6.695425G	2.71	6.683G	-30.99	-15.69	-15.30	2
6855MHz	Pass	6.854225G	1.52	6.866275G	-30.66	-18.28	-12.38	1
6855MHz	Pass	6.8546G	2.39	6.866675G	-31.94	-17.71	-14.23	2
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.962701G	6.47	5.98805G	-25.78	-13.43	-12.35	1
5965MHz	Pass	5.964G	7.15	5.98815G	-24.83	-12.55	-12.28	2
6205MHz	Pass	6.2042G	8.64	6.18215G	-24.66	-11.37	-13.29	1
6205MHz	Pass	6.2038G	7.57	6.1817G	-26.28	-11.83	-14.45	2
6405MHz	Pass	6.40645G	6.76	6.4274G	-24.37	-12.24	-12.13	1
6405MHz	Pass	6.408549G	4.05	6.42745G	-26.22	-15.97	-10.25	2
6565MHz	Pass	6.553103G	4.69	6.5887G	-31.59	-15.32	-16.27	1
6565MHz	Pass	6.5665G	6.42	6.5882G	-27.74	-13.64	-14.10	2
6685MHz	Pass	6.679551G	2.76	6.66175G	-29.93	-17.34	-12.59	1
6685MHz	Pass	6.68605G	5.27	6.7075G	-26.56	-14.77	-11.79	2
6845MHz	Pass	6.84325G	3.78	6.86765G	-28.39	-16.28	-12.11	1
6845MHz	Pass	6.84605G	4.39	6.86785G	-28.73	-15.64	-13.09	2
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9807G	4.02	6.029G	-27.33	-15.78	-11.55	1
5985MHz	Pass	5.984G	4.59	6.0285G	-24.81	-15.42	-9.39	2
6225MHz	Pass	6.2238G	5.65	6.1818G	-23.52	-14.39	-9.13	1
6225MHz	Pass	6.2206G	4.48	6.181G	-24.82	-15.67	-9.15	2
6385MHz	Pass	6.3867G	4.96	6.4284G	-24.98	-15.11	-9.87	1
6385MHz	Pass	6.3791G	3.15	6.43G	-28.23	-16.87	-11.36	2
6625MHz	Pass	6.6177G	1.54	6.581G	-30.19	-18.48	-11.71	1
6625MHz	Pass	6.6277G	2.58	6.6685G	-27.31	-17.43	-9.88	2
6705MHz	Pass	6.7009G	0.92	6.6612G	-29.29	-19.12	-10.17	1
6705MHz	Pass	6.7067G	2.58	6.7491G	-29.25	-17.44	-11.81	2
6785MHz	Pass	6.7811G	2.69	6.7412G	-27.98	-17.31	-10.67	1
6785MHz	Pass	6.7866G	3.31	6.8292G	-27.31	-16.71	-10.60	2
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0204G	5.10	6.111G	-25.32	-14.91	-10.41	1
6025MHz	Pass	6.0218G	4.89	6.112G	-26.00	-15.13	-10.87	2
6185MHz	Pass	6.1826G	5.52	6.0966G	-28.14	-14.49	-13.65	1
6185MHz	Pass	6.1812G	5.56	6.0974G	-26.34	-14.45	-11.89	2
6345MHz	Pass	6.348G	4.84	6.4328G	-26.52	-15.17	-11.35	1
6345MHz	Pass	6.3384G	3.73	6.4314G	-25.37	-16.27	-9.10	2
6665MHz	Pass	6.6568G	3.63	6.5768G	-28.03	-16.38	-11.65	1
6665MHz	Pass	6.6686G	4.04	6.5762G	-29.58	-15.98	-13.60	2
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1014G	4.46	6.6138G	-47.37	-35.54	-11.83	1
6105MHz	Pass	6.101G	4.85	6.6114G	-45.93	-35.15	-10.78	2
6265MHz	Pass	6.2474G	3.93	6.7818G	-49.02	-35.93	-13.09	1
6265MHz	Pass	6.12024G	3.45	6.7686G	-47.40	-35.86	-11.54	2

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

5955MHz_TX

08/01/2026

CF (Hz)
5.955G


Span (Hz)
100M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
4.01m

Detector Type
RMS

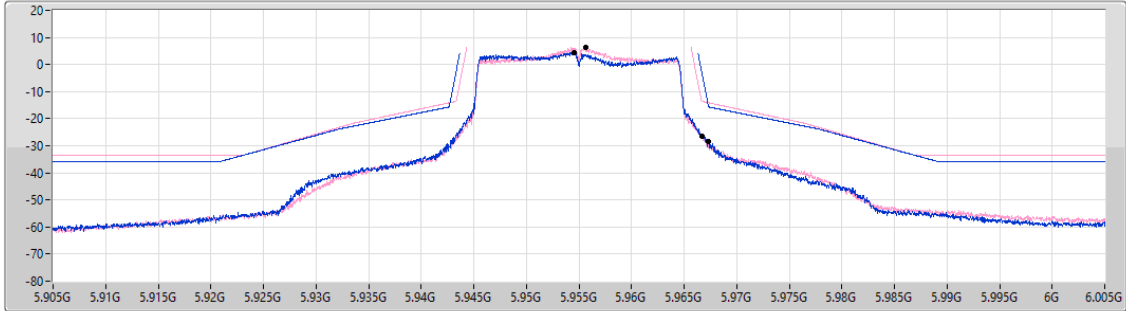

Port 1 ☐

Port 2 ☐

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6405MHz_TX

08/01/2026

CF (Hz)
6.405G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
4.01m

Detector Type
RMS

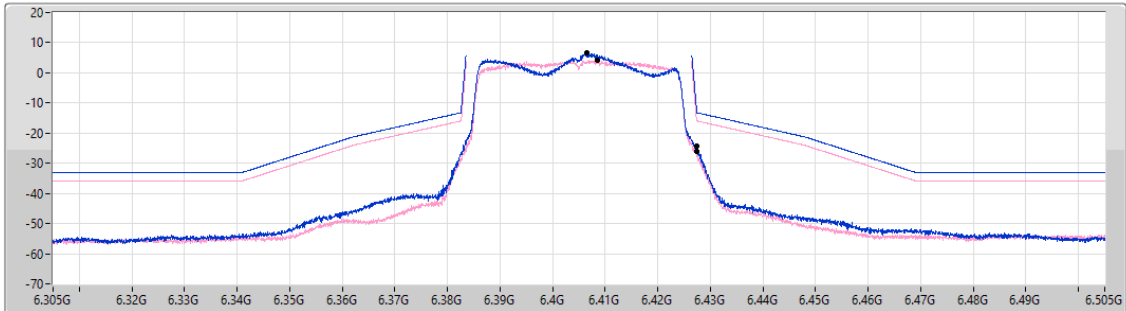

Port 1 ☐


Port 2 ☐

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6225MHz_TX

08/01/2026

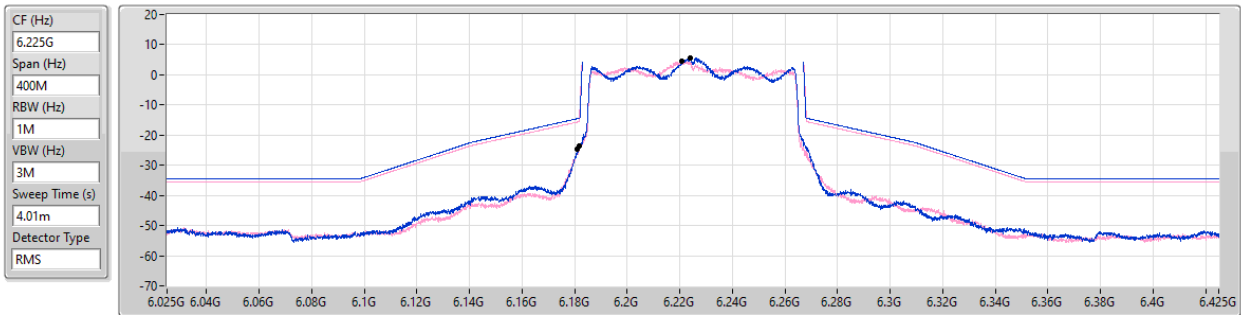


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6345MHz_TX

08/01/2026

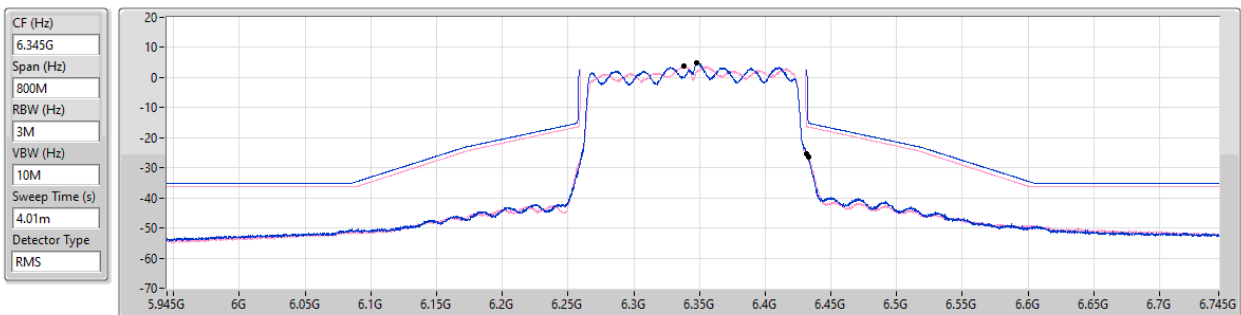


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6105MHz_TX

08/01/2026

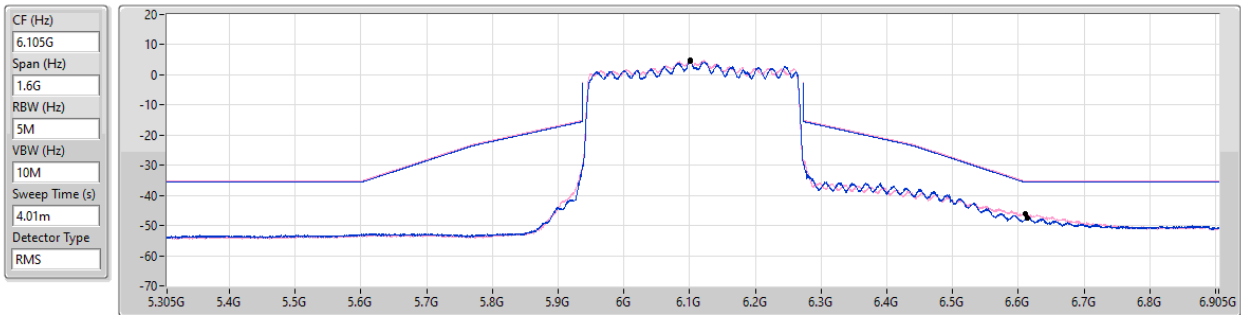


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6855MHz_TX

08/01/2026

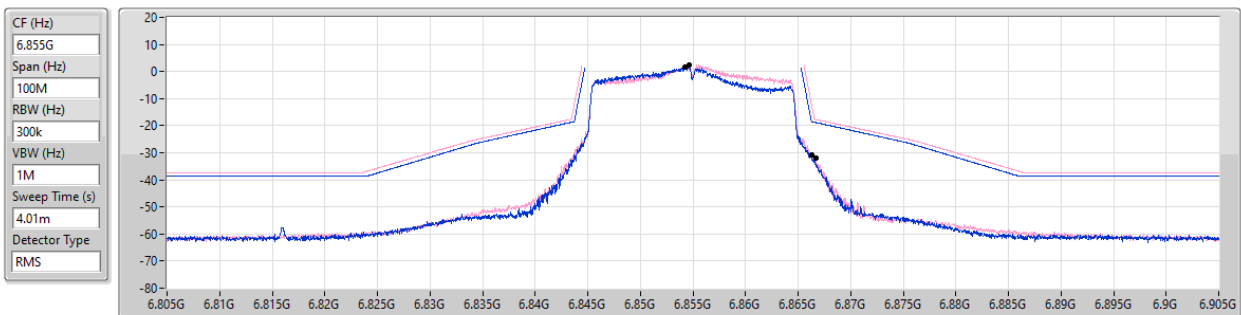


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6685MHz_TX

08/01/2026

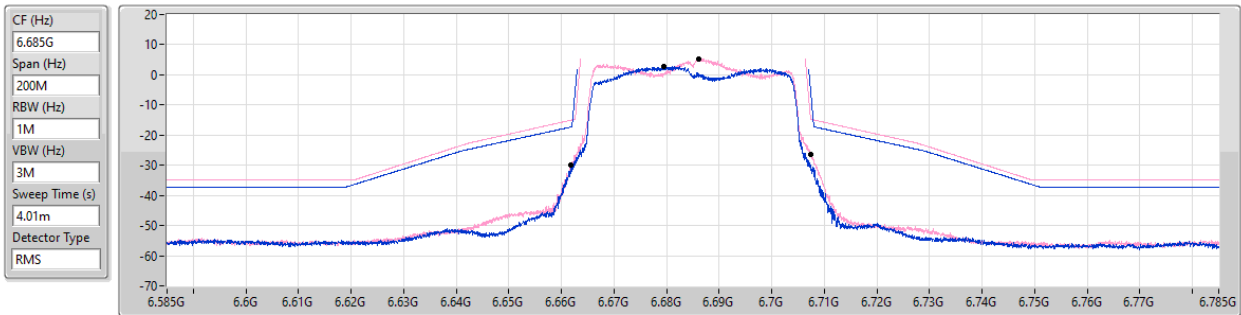


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6625MHz_TX

08/01/2026

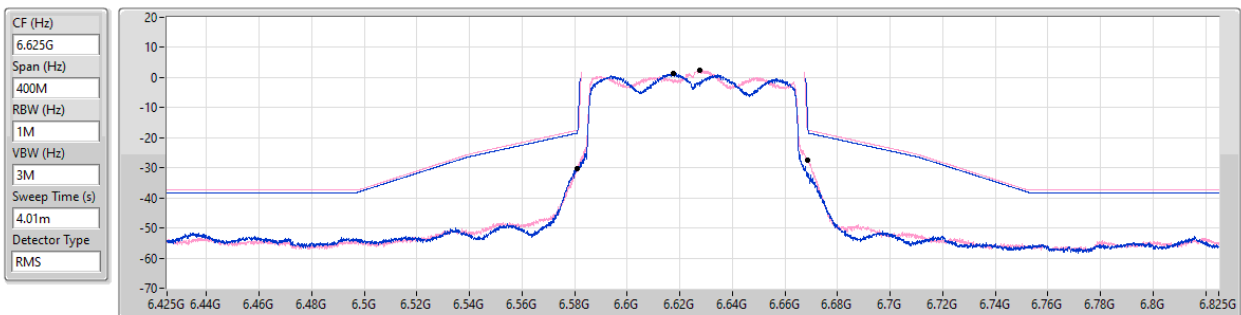


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6665MHz_TX

08/01/2026

CF (Hz)
6.665G
Span (Hz)
800M
RBW (Hz)
3M
VBW (Hz)
10M
Sweep Time (s)
4.01m
Detector Type
RMS

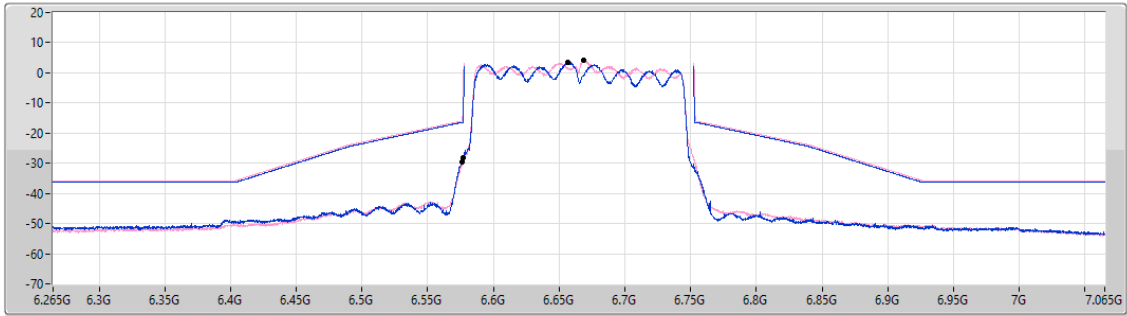

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.6568G	3.63	6.5768G	-28.03	-16.38	-11.65	1
6.6686G	4.04	6.5762G	-29.58	-15.98	-13.60	2



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	Pass	6.02099G	3.76	6.1124G	-45.08	-36.24	-8.84	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	Pass	6.10018G	4.18	6.2804G	-43.36	-35.82	-7.54	1
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	Pass	6.25656G	5.57	6.493G	-31.76	-26.20	-5.56	1

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.95711G	3.32	6.1167G	-48.01	-36.68	-11.33	1
5985MHz	Pass	6.02099G	3.76	6.1124G	-45.08	-36.24	-8.84	2
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.02089G	3.37	6.1392G	-49.60	-36.63	-12.97	1
5985MHz	Pass	6.01369G	4.10	6.139G	-46.91	-35.90	-11.01	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.10018G	4.18	6.2804G	-43.36	-35.82	-7.54	1
6025MHz	Pass	6.09878G	5.04	6.2782G	-44.00	-34.37	-9.63	2
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.09978G	4.90	6.2938G	-45.43	-35.10	-10.33	1
6025MHz	Pass	6.09418G	4.77	6.2884G	-45.77	-35.23	-10.54	2
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.09758G	4.78	6.3362G	-45.02	-35.22	-9.80	1
6025MHz	Pass	6.07439G	5.53	6.3296G	-47.16	-34.47	-12.69	2
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.17978G	5.31	6.6082G	-47.23	-34.69	-12.54	1
6105MHz	Pass	6.08261G	4.85	6.6094G	-46.41	-35.15	-11.26	2
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.17258G	4.97	6.6066G	-44.61	-34.94	-9.67	1
6105MHz	Pass	6.08021G	4.90	6.6054G	-47.15	-34.92	-12.23	2
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.25656G	5.57	6.493G	-31.76	-26.20	-5.56	1
6105MHz	Pass	6.00542G	4.20	6.5018G	-35.64	-28.20	-7.44	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

MASK

5985MHz_TX

17/01/2026

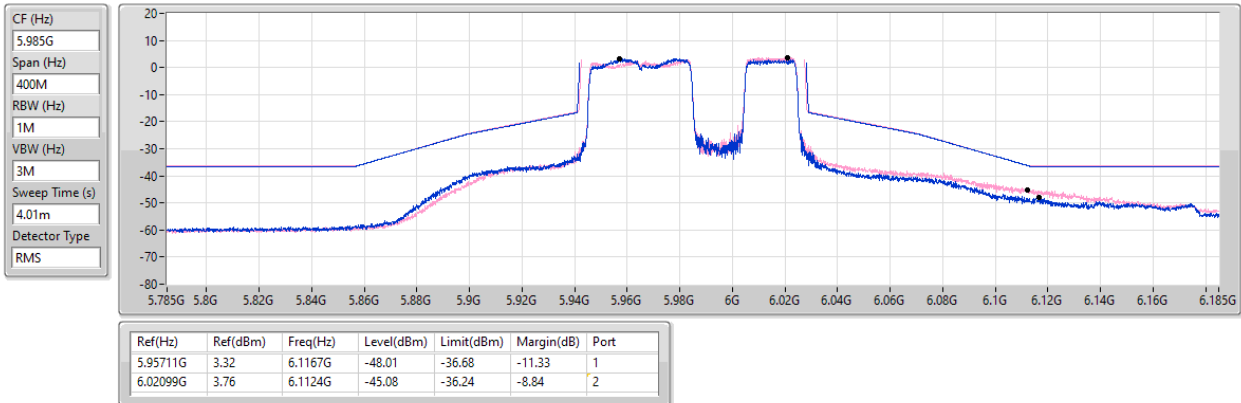


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

MASK

5985MHz_TX

17/01/2026

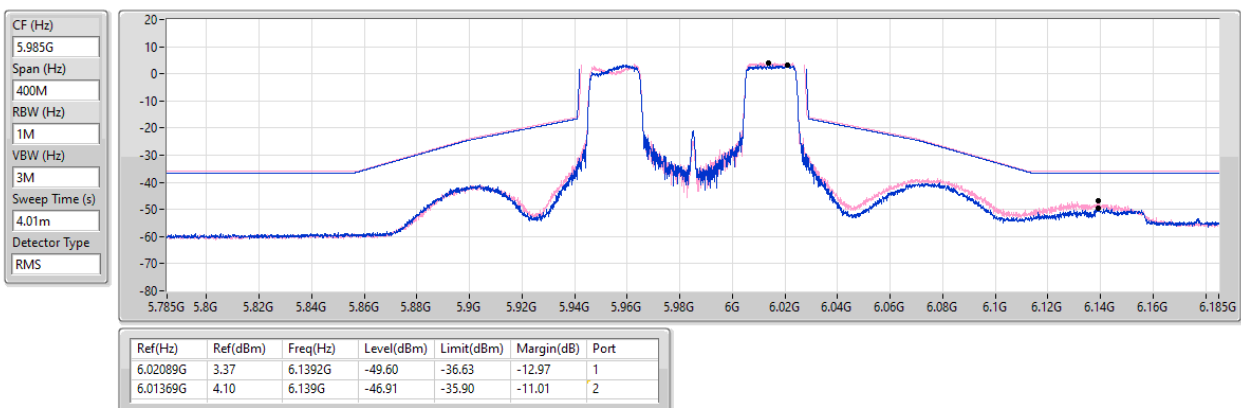


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

MASK

6025MHz_TX

17/01/2026

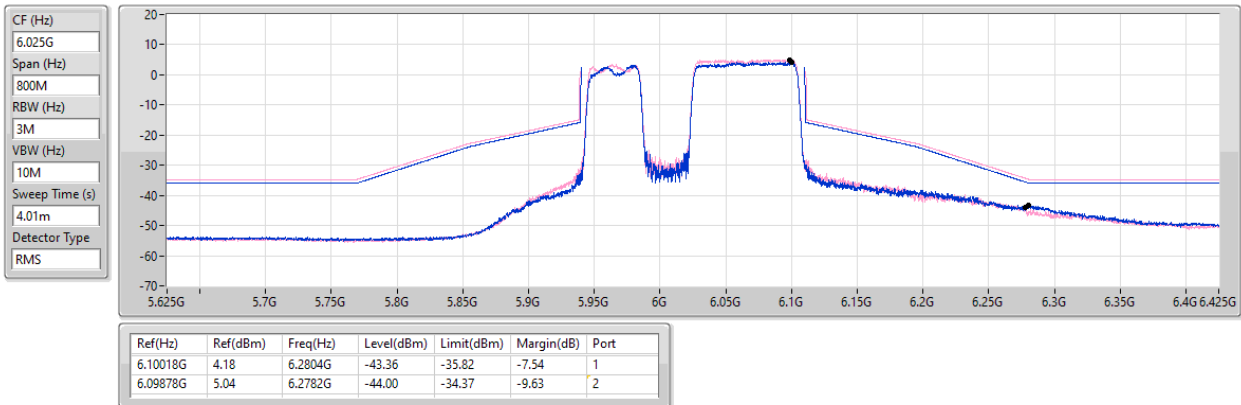


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

MASK

6025MHz_TX

17/01/2026

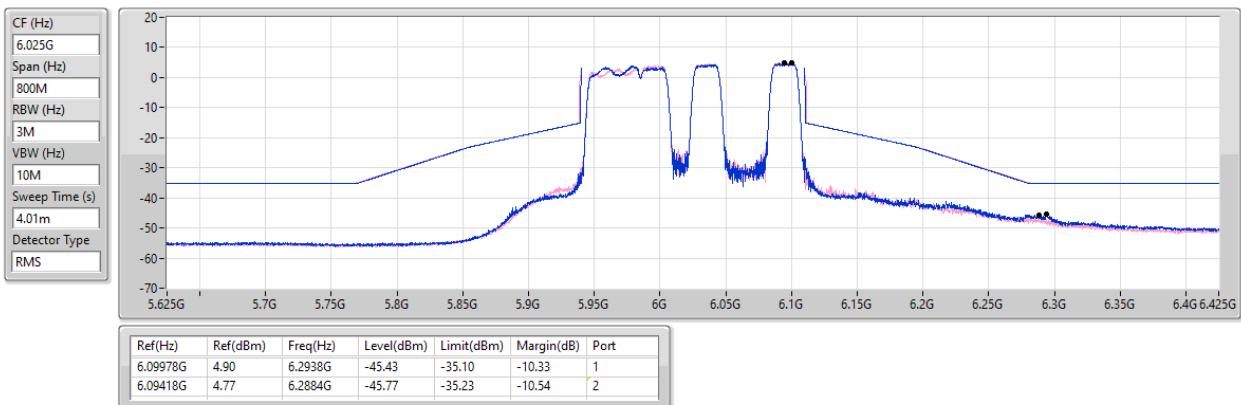


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

MASK

6025MHz_TX

17/01/2026

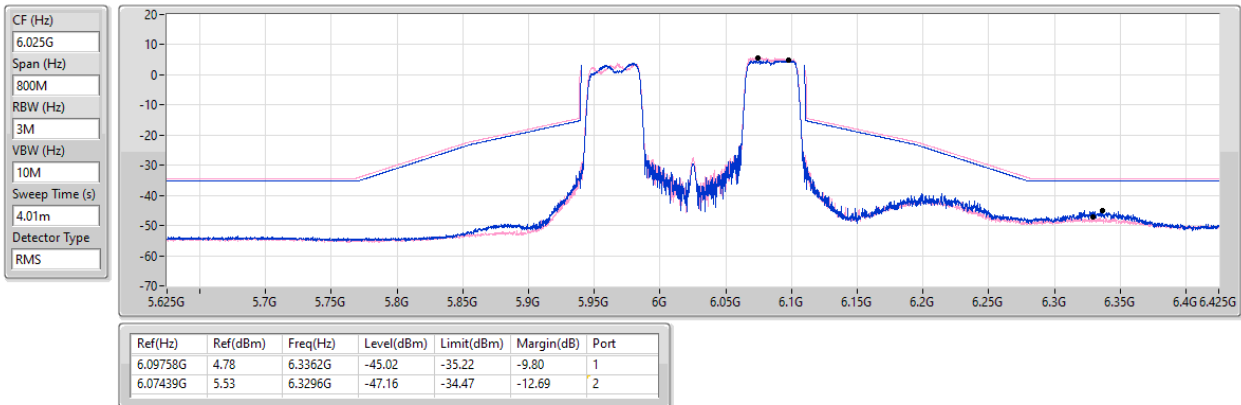


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX

MASK

6105MHz_TX

17/01/2026

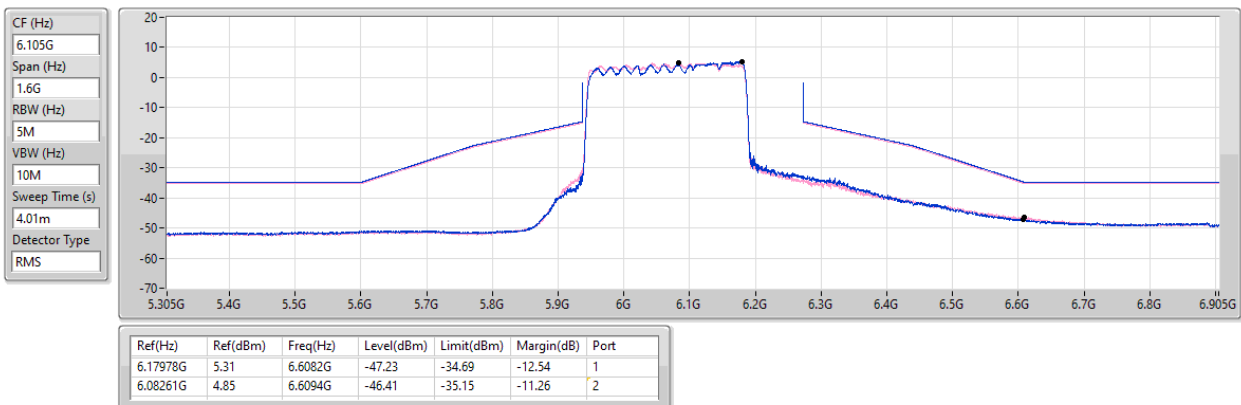


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX

MASK

6105MHz_TX

17/01/2026

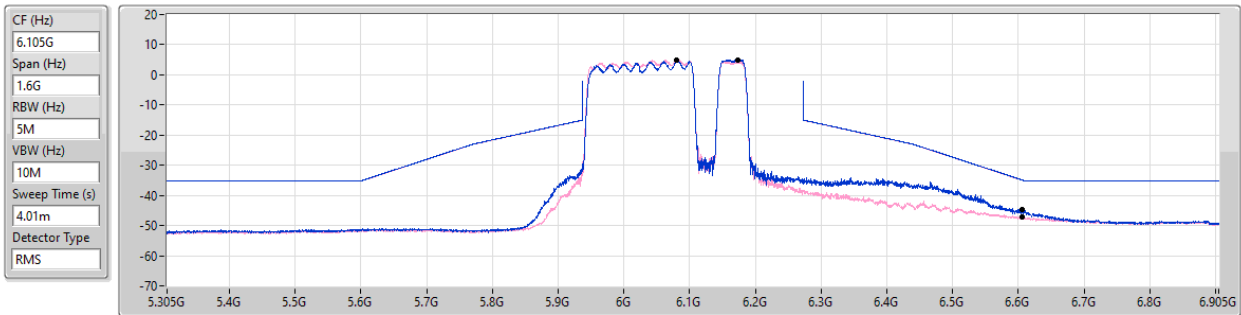


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.17258G	4.97	6.6066G	-44.61	-34.94	-9.67	1
6.08021G	4.90	6.6054G	-47.15	-34.92	-12.23	2

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

MASK

6105MHz_TX

17/01/2026

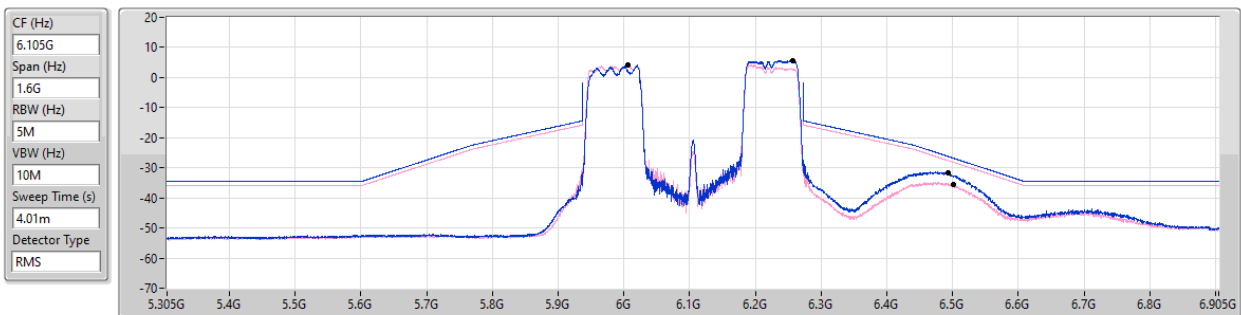

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.25656G	5.57	6.493G	-31.76	-26.20	-5.56	1
6.00542G	4.20	6.5018G	-35.64	-28.20	-7.44	2



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	Pass	5.9879G	4.31	6.1077G	-45.44	-34.37	-11.07	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	Pass	6.0384G	4.90	6.2838G	-41.60	-35.10	-6.50	1
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	Pass	6.1014G	4.63	6.5926G	-38.62	-34.27	-4.35	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.02019G	3.50	6.1207G	-47.82	-36.50	-11.32	1
5985MHz	Pass	5.9879G	4.31	6.1077G	-45.44	-34.37	-11.07	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0216G	5.21	6.2848G	-42.20	-34.79	-7.41	1
6025MHz	Pass	6.022G	4.73	6.2728G	-46.72	-33.93	-12.79	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0384G	4.90	6.2838G	-41.60	-35.10	-6.50	1
6025MHz	Pass	6.028G	4.60	6.2826G	-45.79	-35.40	-10.39	2
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1014G	4.63	6.5926G	-38.62	-34.27	-4.35	1
6105MHz	Pass	6.1002G	4.98	6.6078G	-41.61	-35.01	-6.60	2
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.101G	4.55	6.6078G	-45.41	-35.44	-9.97	1
6105MHz	Pass	6.101G	5.12	6.6086G	-48.23	-34.88	-13.35	2
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.101G	4.61	6.5982G	-44.64	-34.69	-9.95	1
6105MHz	Pass	6.1002G	4.83	6.5942G	-39.03	-34.19	-4.84	2


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

MASK

5985MHz_TX

17/01/2026

CF (Hz)
5.985G
Span (Hz)
400M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.01m
Detector Type
RMS

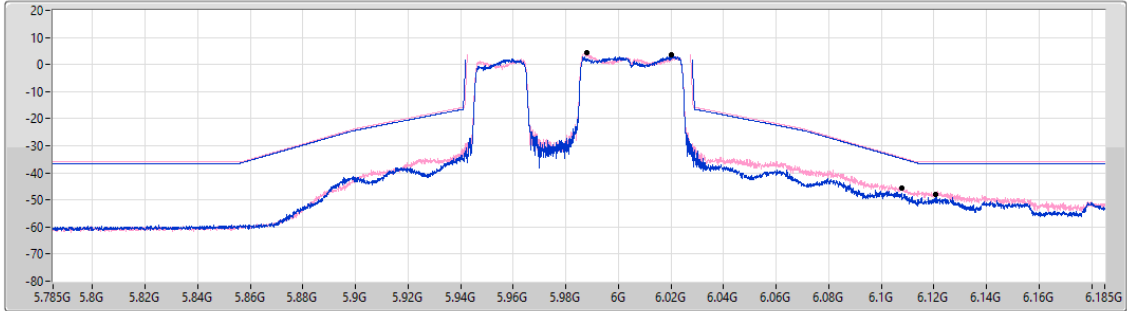

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.02019G	3.50	6.1207G	-47.82	-36.50	-11.32	1
5.9879G	4.31	6.1077G	-45.44	-34.37	-11.07	2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX

MASK

6025MHz_TX

17/01/2026

CF (Hz)
6.025G
Span (Hz)
800M
RBW (Hz)
3M
VBW (Hz)
10M
Sweep Time (s)
4.01m
Detector Type
RMS

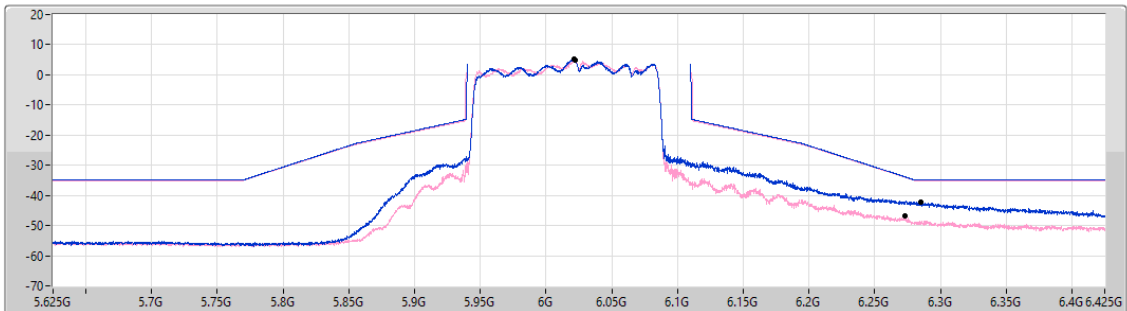


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.0216G	5.21	6.2848G	-42.20	-34.79	-7.41	1
6.022G	4.73	6.2728G	-46.72	-33.93	-12.79	2

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX

MASK

6025MHz_TX

17/01/2026

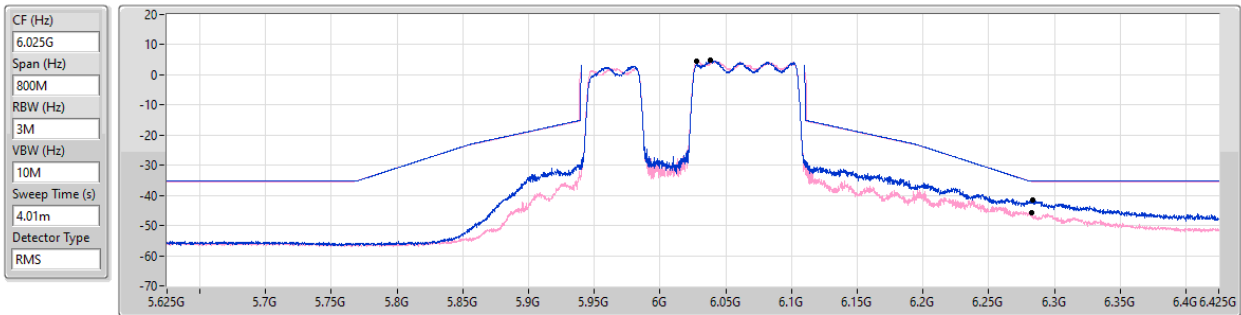


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.0384G	4.90	6.2838G	-41.60	-35.10	-6.50	1
6.028G	4.60	6.2826G	-45.79	-35.40	-10.39	2

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX

MASK

6105MHz_TX

17/01/2026

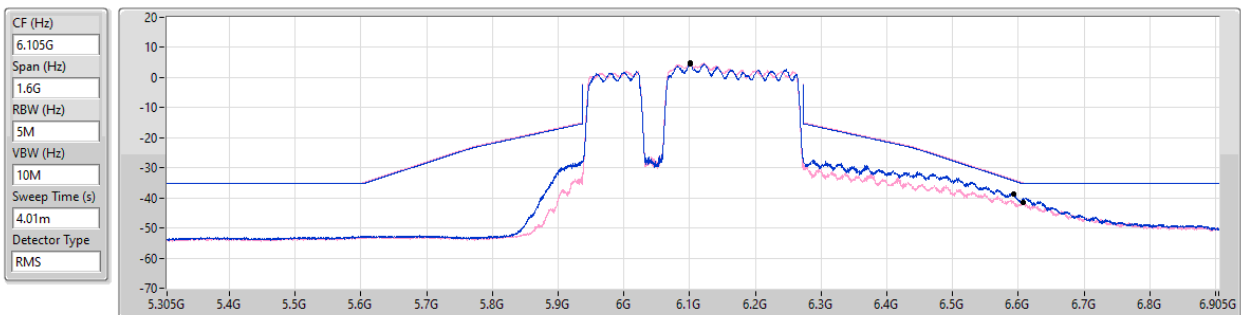


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.1014G	4.63	6.5926G	-38.62	-34.27	-4.35	1
6.1002G	4.98	6.6078G	-41.61	-35.01	-6.60	2

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX

MASK

6105MHz_TX

17/01/2026

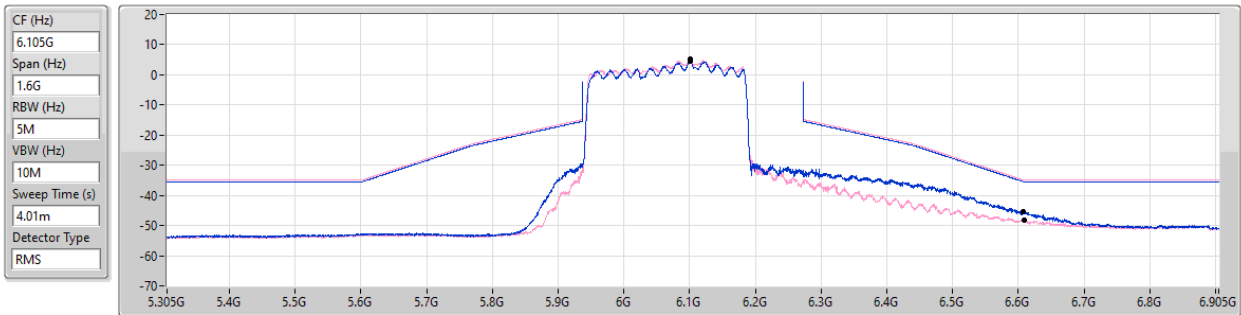


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.101G	4.55	6.6078G	-45.41	-35.44	-9.97	1
6.101G	5.12	6.6086G	-48.23	-34.88	-13.35	2

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_2TX

MASK

6105MHz_TX

17/01/2026

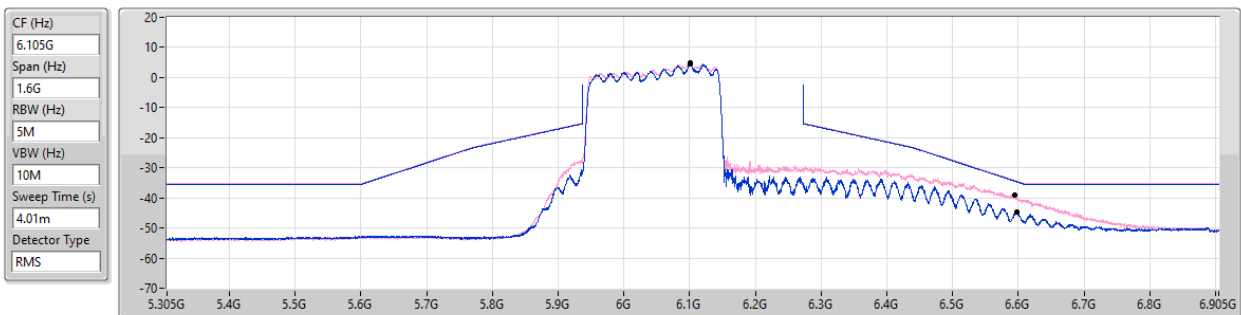

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.101G	4.61	6.5982G	-44.64	-34.69	-9.95	1
6.1002G	4.83	6.5942G	-39.03	-34.19	-4.84	2



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	PK	336.52M	42.61	46.00	-3.39	3	Horizontal	0	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz_PoE	Pass	PK	61.04M	32.79	40.00	-7.21	3	Vertical	360	1.00
6025MHz_PoE	Pass	PK	206.54M	31.72	43.50	-11.78	3	Vertical	360	1.00
6025MHz_PoE	Pass	PK	410.24M	35.39	46.00	-10.61	3	Vertical	360	1.00
6025MHz_PoE	Pass	PK	561.56M	37.05	46.00	-8.95	3	Vertical	360	1.00
6025MHz_PoE	Pass	PK	709M	40.06	46.00	-5.94	3	Vertical	360	1.00
6025MHz_PoE	Pass	PK	1G	42.73	54.00	-11.27	3	Vertical	360	1.00
6025MHz_PoE	Pass	PK	119.24M	31.24	43.50	-12.26	3	Horizontal	0	1.00
6025MHz_PoE	Pass	PK	206.54M	30.84	43.50	-12.66	3	Horizontal	0	1.00
6025MHz_PoE	Pass	PK	336.52M	42.61	46.00	-3.39	3	Horizontal	0	1.00
6025MHz_PoE	Pass	PK	557.68M	36.55	46.00	-9.45	3	Horizontal	0	1.00
6025MHz_PoE	Pass	PK	804.06M	32.13	46.00	-13.87	3	Horizontal	0	1.00
6025MHz_PoE	Pass	PK	961.2M	38.07	54.00	-15.93	3	Horizontal	0	1.00


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_PoE

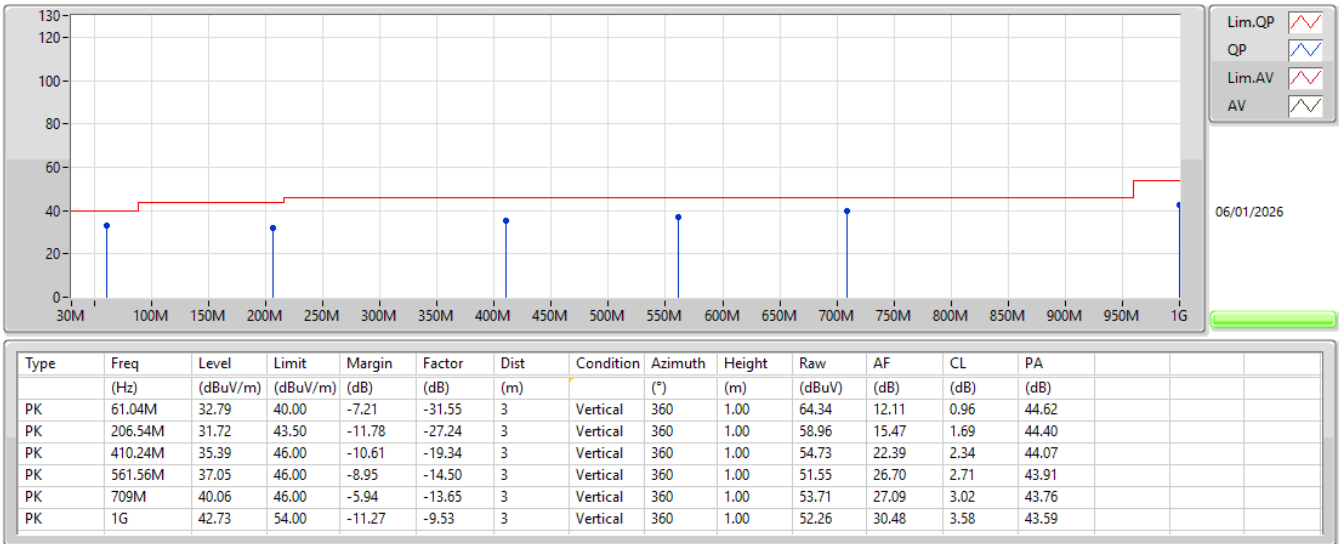

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_PoE

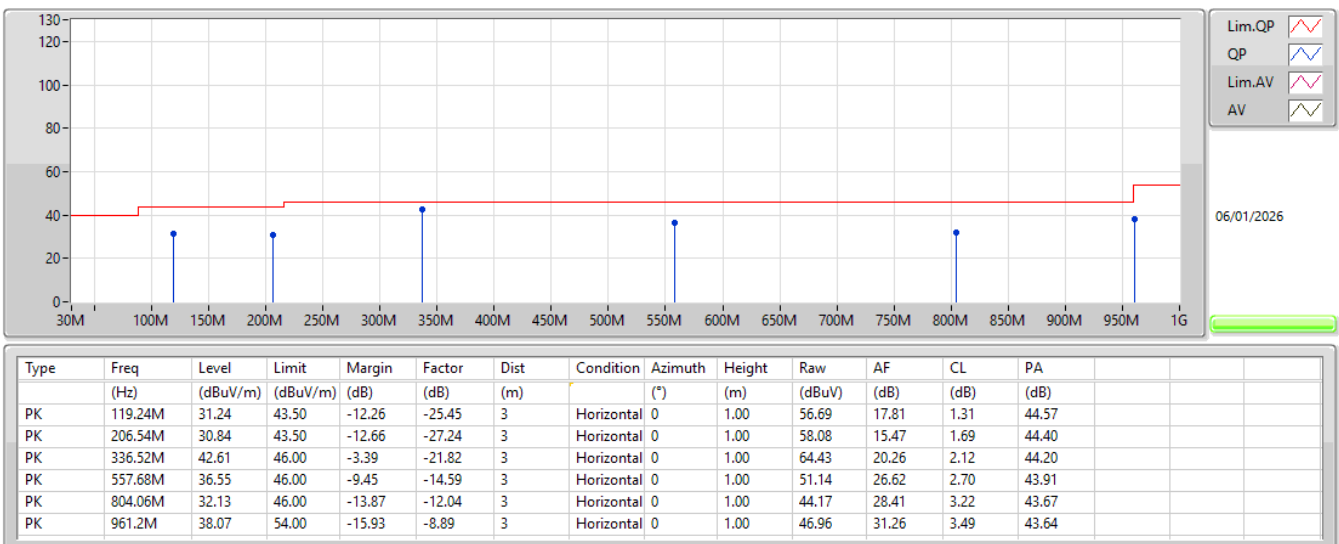

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	11.91002G	43.30	54.00	-10.70	3	Vertical	350	1.50
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	11.93008G	43.93	54.00	-10.07	3	Vertical	45	2.75
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	11.97G	43.53	54.00	-10.47	3	Vertical	48	1.50
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	12.43336G	42.09	54.00	-11.91	3	Horizontal	318	2.50
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	AV	12.68936G	43.12	54.00	-10.88	3	Horizontal	318	1.50
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	13.39652G	45.49	54.00	-8.51	3	Horizontal	285	1.78
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	13.37332G	44.48	54.00	-9.52	3	Horizontal	276	1.53
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	13.2612G	43.92	54.00	-10.08	3	Vertical	316	2.96
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	13.26984G	43.61	54.00	-10.39	3	Vertical	0	2.94

Result


Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	AV	5.9172G	49.58	68.20	-18.62	3	Vertical	9	1.34
5955MHz	Pass	AV	5.9541G	106.67	Inf	-Inf	3	Vertical	9	1.34
5955MHz	Pass	PK	5.8728G	62.28	88.20	-25.92	3	Vertical	9	1.34
5955MHz	Pass	PK	5.9544G	117.41	Inf	-Inf	3	Vertical	9	1.34
5955MHz	Pass	AV	5.9103G	49.27	68.20	-18.93	3	Horizontal	323	1.63
5955MHz	Pass	AV	5.9559G	99.60	Inf	-Inf	3	Horizontal	323	1.63
5955MHz	Pass	PK	5.8764G	61.87	88.20	-26.33	3	Horizontal	323	1.63
5955MHz	Pass	PK	5.9568G	110.27	Inf	-Inf	3	Horizontal	323	1.63
5955MHz	Pass	AV	11.91002G	43.30	54.00	-10.70	3	Vertical	350	1.50
5955MHz	Pass	PK	11.91624G	55.16	74.00	-18.84	3	Vertical	350	1.50
5955MHz	Pass	AV	11.91006G	42.99	54.00	-11.01	3	Horizontal	335	1.50
5955MHz	Pass	PK	11.90962G	55.22	74.00	-18.78	3	Horizontal	335	1.50
6195MHz	Pass	AV	12.3855G	41.88	54.00	-12.12	3	Vertical	270	2.49
6195MHz	Pass	PK	12.38266G	55.27	74.00	-18.73	3	Vertical	270	2.49
6195MHz	Pass	AV	12.38524G	41.86	54.00	-12.14	3	Horizontal	209	1.83
6195MHz	Pass	PK	12.39292G	55.29	74.00	-18.71	3	Horizontal	209	1.83
6415MHz	Pass	AV	12.83984G	43.47	68.20	-24.73	3	Vertical	215	1.50
6415MHz	Pass	PK	12.8398G	56.32	88.20	-31.88	3	Vertical	215	1.50
6415MHz	Pass	AV	12.8379G	43.49	68.20	-24.71	3	Horizontal	14	1.50
6415MHz	Pass	PK	12.82942G	56.70	88.20	-31.50	3	Horizontal	14	1.50
6535MHz	Pass	AV	13.07532G	45.71	68.20	-22.49	3	Vertical	55	2.00
6535MHz	Pass	PK	13.07312G	59.22	88.20	-28.98	3	Vertical	55	2.00
6535MHz	Pass	AV	13.07452G	44.61	68.20	-23.59	3	Horizontal	327	1.71
6535MHz	Pass	PK	13.07312G	57.33	88.20	-30.87	3	Horizontal	327	1.71
6695MHz	Pass	AV	13.39006G	44.78	54.00	-9.22	3	Vertical	305	1.81
6695MHz	Pass	PK	13.38792G	57.04	74.00	-16.96	3	Vertical	305	1.81
6695MHz	Pass	AV	13.39652G	45.49	54.00	-8.51	3	Horizontal	285	1.78
6695MHz	Pass	PK	13.3989G	58.52	74.00	-15.48	3	Horizontal	285	1.78
6855MHz	Pass	AV	13.70346G	46.06	68.20	-22.14	3	Vertical	312	1.55
6855MHz	Pass	PK	13.7015G	59.70	88.20	-28.50	3	Vertical	312	1.55
6855MHz	Pass	AV	13.70994G	47.29	68.20	-20.91	3	Horizontal	334	1.44
6855MHz	Pass	PK	13.71012G	59.78	88.20	-28.42	3	Horizontal	334	1.44
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	AV	5.9248G	55.29	68.20	-12.91	3	Vertical	7	1.29
5965MHz	Pass	AV	5.9641G	104.22	Inf	-Inf	3	Vertical	7	1.29
5965MHz	Pass	PK	5.9248G	67.43	88.20	-20.77	3	Vertical	7	1.29
5965MHz	Pass	PK	5.9644G	115.22	Inf	-Inf	3	Vertical	7	1.29
5965MHz	Pass	AV	5.9248G	50.72	68.20	-17.48	3	Horizontal	321	1.65
5965MHz	Pass	AV	5.9641G	96.38	Inf	-Inf	3	Horizontal	321	1.65
5965MHz	Pass	PK	5.914G	62.07	88.20	-26.13	3	Horizontal	321	1.65
5965MHz	Pass	PK	5.9644G	107.18	Inf	-Inf	3	Horizontal	321	1.65
5965MHz	Pass	AV	11.93008G	43.93	54.00	-10.07	3	Vertical	45	2.75
5965MHz	Pass	PK	11.93004G	56.00	74.00	-18.00	3	Vertical	45	2.75
5965MHz	Pass	AV	11.93004G	43.27	54.00	-10.73	3	Horizontal	333	3.00
5965MHz	Pass	PK	11.92716G	55.60	74.00	-18.40	3	Horizontal	333	3.00
6205MHz	Pass	AV	12.42432G	42.07	54.00	-11.93	3	Vertical	260	1.50
6205MHz	Pass	PK	12.42796G	54.75	74.00	-19.25	3	Vertical	260	1.50
6205MHz	Pass	AV	12.4298G	42.03	54.00	-11.97	3	Horizontal	99	1.97
6205MHz	Pass	PK	12.41516G	55.10	74.00	-18.90	3	Horizontal	99	1.97
6405MHz	Pass	AV	12.8284G	43.49	68.20	-24.71	3	Vertical	160	1.50
6405MHz	Pass	PK	12.80936G	57.27	88.20	-30.93	3	Vertical	160	1.50
6405MHz	Pass	AV	12.8098G	43.63	68.20	-24.57	3	Horizontal	318	1.50
6405MHz	Pass	PK	12.81916G	56.53	88.20	-31.67	3	Horizontal	318	1.50
6565MHz	Pass	AV	13.13528G	43.59	68.20	-24.61	3	Vertical	91	1.50
6565MHz	Pass	PK	13.11876G	56.97	88.20	-31.23	3	Vertical	91	1.50
6565MHz	Pass	AV	13.13576G	44.45	68.20	-23.75	3	Horizontal	307	2.69
6565MHz	Pass	PK	13.11876G	57.38	88.20	-30.82	3	Horizontal	307	2.69
6685MHz	Pass	AV	13.37012G	43.73	54.00	-10.27	3	Vertical	313	1.77
6685MHz	Pass	PK	13.35456G	57.08	74.00	-16.92	3	Vertical	313	1.77
6685MHz	Pass	AV	13.37332G	44.48	54.00	-9.52	3	Horizontal	276	1.53

Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6685MHz	Pass	PK	13.3702G	56.97	74.00	-17.03	3	Horizontal	276	1.53
6845MHz	Pass	AV	13.69004G	45.80	68.20	-22.40	3	Vertical	347	1.50
6845MHz	Pass	PK	13.70364G	57.51	88.20	-30.69	3	Vertical	347	1.50
6845MHz	Pass	AV	13.68996G	46.95	68.20	-21.25	3	Horizontal	334	1.57
6845MHz	Pass	PK	13.68976G	58.49	88.20	-29.71	3	Horizontal	334	1.57
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	AV	5.925G	54.38	68.20	-13.82	3	Vertical	7	1.25
5985MHz	Pass	AV	5.984G	101.03	Inf	-Inf	3	Vertical	7	1.25
5985MHz	Pass	PK	5.9245G	65.67	88.20	-22.53	3	Vertical	7	1.25
5985MHz	Pass	PK	5.9865G	111.82	Inf	-Inf	3	Vertical	7	1.25
5985MHz	Pass	AV	5.9245G	50.30	68.20	-17.90	3	Horizontal	321	1.50
5985MHz	Pass	AV	5.986G	93.25	Inf	-Inf	3	Horizontal	321	1.50
5985MHz	Pass	PK	5.9245G	62.26	88.20	-25.94	3	Horizontal	321	1.50
5985MHz	Pass	PK	5.984G	104.75	Inf	-Inf	3	Horizontal	321	1.50
5985MHz	Pass	AV	11.97G	43.53	54.00	-10.47	3	Vertical	48	1.50
5985MHz	Pass	PK	11.98552G	56.22	74.00	-17.78	3	Vertical	48	1.50
5985MHz	Pass	AV	11.96992G	42.80	54.00	-11.20	3	Horizontal	334	1.50
5985MHz	Pass	PK	11.9768G	56.06	74.00	-17.94	3	Horizontal	334	1.50
6225MHz	Pass	AV	12.48728G	42.25	54.00	-11.75	3	Vertical	172	1.50
6225MHz	Pass	PK	12.44G	55.68	74.00	-18.32	3	Vertical	172	1.50
6225MHz	Pass	AV	12.4752G	42.25	54.00	-11.75	3	Horizontal	216	1.50
6225MHz	Pass	PK	12.41592G	55.13	74.00	-18.87	3	Horizontal	216	1.50
6385MHz	Pass	AV	12.77896G	43.22	68.20	-24.98	3	Vertical	360	1.50
6385MHz	Pass	PK	12.74792G	56.36	88.20	-31.84	3	Vertical	360	1.50
6385MHz	Pass	AV	12.77872G	43.22	68.20	-24.98	3	Horizontal	201	1.50
6385MHz	Pass	PK	12.74616G	55.96	88.20	-32.24	3	Horizontal	201	1.50
6625MHz	Pass	AV	13.2612G	43.92	54.00	-10.08	3	Vertical	316	2.96
6625MHz	Pass	PK	13.26984G	56.38	74.00	-17.62	3	Vertical	316	2.96
6625MHz	Pass	AV	13.26944G	43.53	54.00	-10.47	3	Horizontal	19	1.50
6625MHz	Pass	PK	13.25632G	56.38	74.00	-17.62	3	Horizontal	19	1.50
6705MHz	Pass	AV	13.41G	43.55	68.20	-24.65	3	Vertical	7	2.62
6705MHz	Pass	PK	13.414G	56.22	88.20	-31.98	3	Vertical	7	2.62
6705MHz	Pass	AV	13.40992G	44.51	68.20	-23.69	3	Horizontal	290	1.92
6705MHz	Pass	PK	13.41088G	56.65	88.20	-31.55	3	Horizontal	290	1.92
6785MHz	Pass	AV	13.57G	44.17	68.20	-24.03	3	Vertical	360	2.74
6785MHz	Pass	PK	13.57008G	56.35	88.20	-31.85	3	Vertical	360	2.74
6785MHz	Pass	AV	13.57792G	44.09	68.20	-24.11	3	Horizontal	324	2.64
6785MHz	Pass	PK	13.54136G	57.26	88.20	-30.94	3	Horizontal	324	2.64
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.9225G	52.91	68.20	-15.29	3	Vertical	4	1.01
6025MHz	Pass	AV	6.023G	99.29	Inf	-Inf	3	Vertical	4	1.01
6025MHz	Pass	PK	5.919G	64.92	88.20	-23.28	3	Vertical	4	1.01
6025MHz	Pass	PK	6.0405G	110.65	Inf	-Inf	3	Vertical	4	1.01
6025MHz	Pass	AV	5.923G	49.83	68.20	-18.37	3	Horizontal	324	1.78
6025MHz	Pass	AV	6.023G	91.26	Inf	-Inf	3	Horizontal	324	1.78
6025MHz	Pass	PK	5.918G	61.78	88.20	-26.42	3	Horizontal	324	1.78
6025MHz	Pass	PK	6.028G	102.34	Inf	-Inf	3	Horizontal	324	1.78
6025MHz	Pass	AV	11.97736G	41.88	54.00	-12.12	3	Vertical	207	1.50
6025MHz	Pass	PK	12.12264G	54.57	74.00	-19.43	3	Vertical	207	1.50
6025MHz	Pass	AV	11.9756G	41.88	54.00	-12.12	3	Horizontal	7	2.20
6025MHz	Pass	PK	11.9788G	54.85	74.00	-19.15	3	Horizontal	7	2.20
6185MHz	Pass	AV	12.44584G	42.04	54.00	-11.96	3	Vertical	131	1.50
6185MHz	Pass	PK	12.43288G	54.57	74.00	-19.43	3	Vertical	131	1.50
6185MHz	Pass	AV	12.43336G	42.09	54.00	-11.91	3	Horizontal	318	2.50
6185MHz	Pass	PK	12.36536G	55.12	74.00	-18.88	3	Horizontal	318	2.50
6345MHz	Pass	AV	12.74104G	43.20	68.20	-25.00	3	Vertical	166	1.50
6345MHz	Pass	PK	12.76248G	56.15	88.20	-32.05	3	Vertical	166	1.50
6345MHz	Pass	AV	12.74344G	43.21	68.20	-24.99	3	Horizontal	253	2.71
6345MHz	Pass	PK	12.72664G	56.14	88.20	-32.06	3	Horizontal	253	2.71
6665MHz	Pass	AV	13.26984G	43.61	54.00	-10.39	3	Vertical	0	2.94
6665MHz	Pass	PK	13.33344G	56.17	74.00	-17.83	3	Vertical	0	2.94
6665MHz	Pass	AV	13.3516G	43.58	54.00	-10.42	3	Horizontal	73	1.48

Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6665MHz	Pass	PK	13.2692G	56.49	74.00	-17.51	3	Horizontal	73	1.48
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.925G	50.70	68.20	-17.50	3	Vertical	3	1.13
6105MHz	Pass	AV	6.101G	96.24	Inf	-Inf	3	Vertical	3	1.13
6105MHz	Pass	PK	5.924G	62.80	88.20	-25.40	3	Vertical	3	1.13
6105MHz	Pass	PK	6.102G	106.60	Inf	-Inf	3	Vertical	3	1.13
6105MHz	Pass	AV	5.924G	49.50	68.20	-18.70	3	Horizontal	323	1.77
6105MHz	Pass	AV	6.103G	89.35	Inf	-Inf	3	Horizontal	323	1.77
6105MHz	Pass	PK	5.853G	61.59	88.20	-26.61	3	Horizontal	323	1.77
6105MHz	Pass	PK	6.103G	99.67	Inf	-Inf	3	Horizontal	323	1.77
6105MHz	Pass	AV	12.06568G	42.02	54.00	-11.98	3	Vertical	135	1.96
6105MHz	Pass	PK	12.17032G	55.02	74.00	-18.98	3	Vertical	135	1.96
6105MHz	Pass	AV	12.0644G	41.98	54.00	-12.02	3	Horizontal	50	1.50
6105MHz	Pass	PK	12.30728G	54.68	74.00	-19.32	3	Horizontal	50	1.50
6265MHz	Pass	AV	12.68936G	43.09	54.00	-10.91	3	Vertical	166	1.50
6265MHz	Pass	PK	12.61608G	55.66	74.00	-18.34	3	Vertical	166	1.50
6265MHz	Pass	AV	12.68936G	43.12	54.00	-10.88	3	Horizontal	318	1.50
6265MHz	Pass	PK	12.68776G	55.80	74.00	-18.20	3	Horizontal	318	1.50
6425MHz	Pass	AV	12.98696G	43.80	68.20	-24.40	3	Vertical	167	1.61
6425MHz	Pass	PK	12.96776G	56.60	88.20	-31.60	3	Vertical	167	1.61
6425MHz	Pass	AV	13.00616G	43.76	68.20	-24.44	3	Horizontal	179	1.50
6425MHz	Pass	PK	12.98824G	57.17	88.20	-31.03	3	Horizontal	179	1.50


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

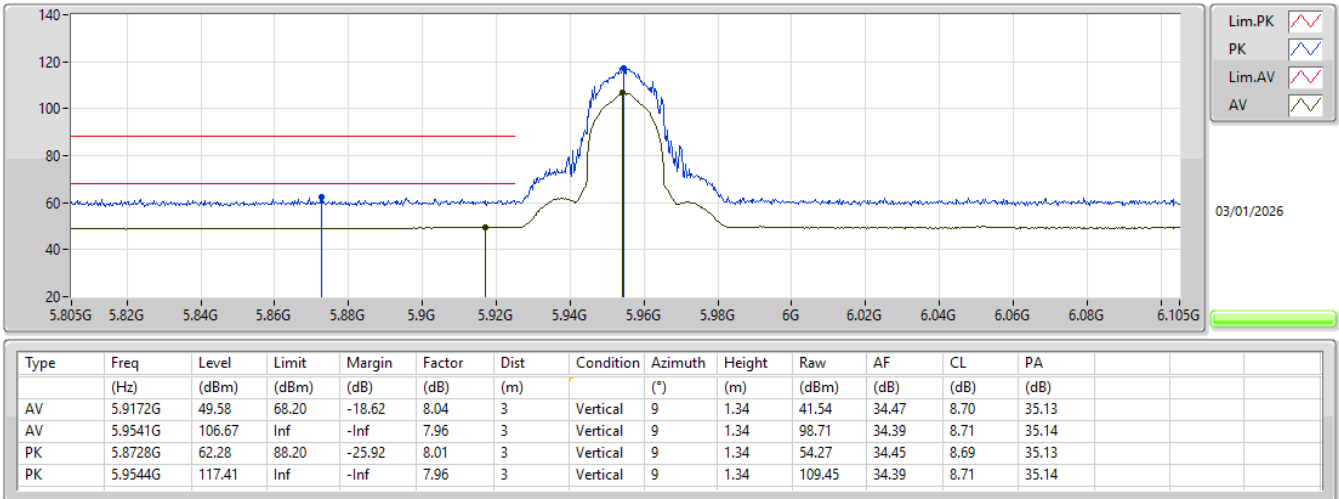


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

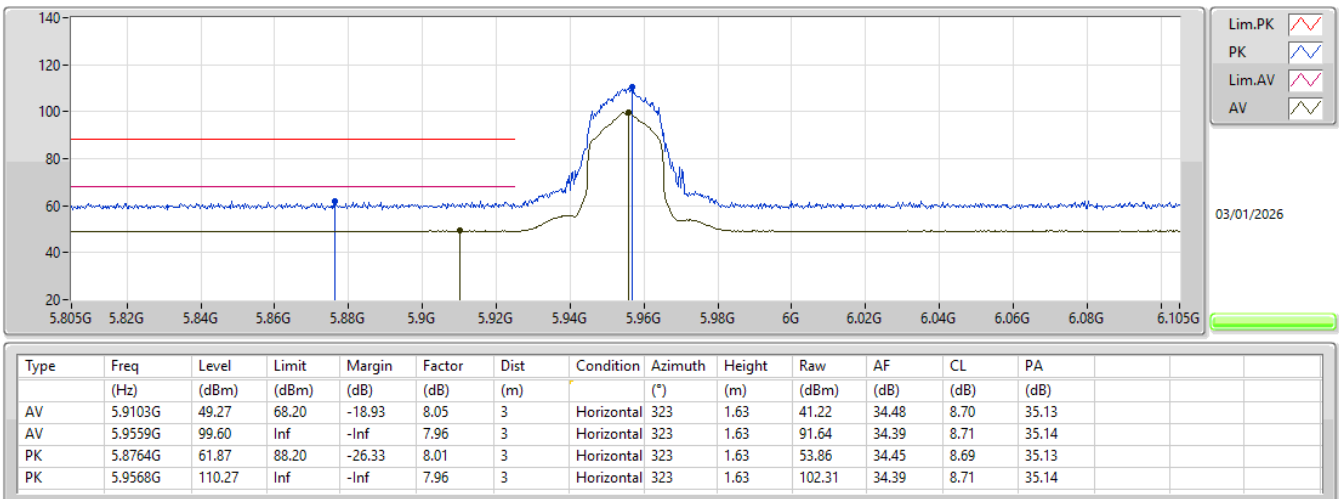


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

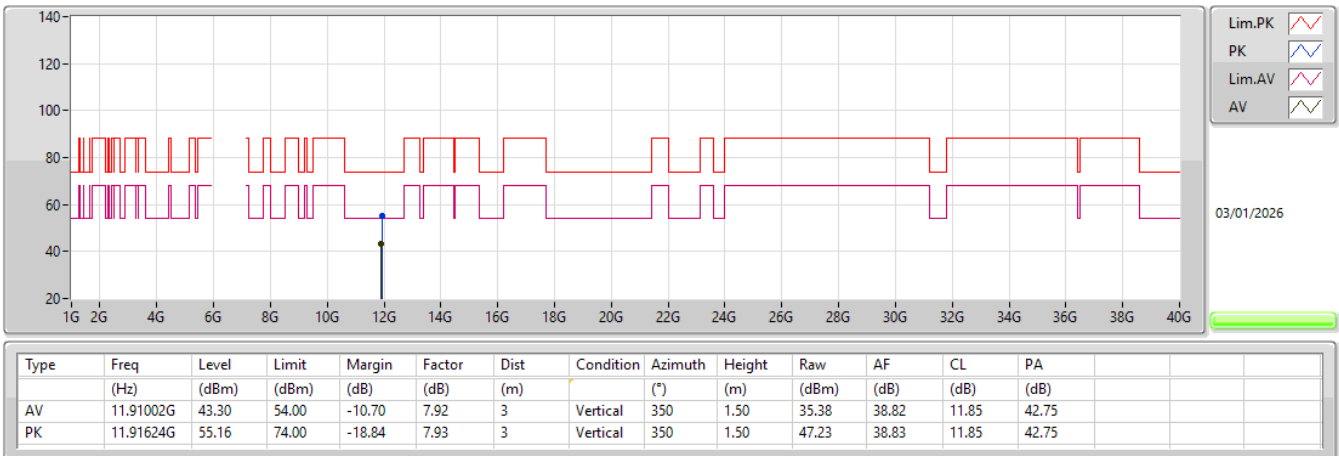


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

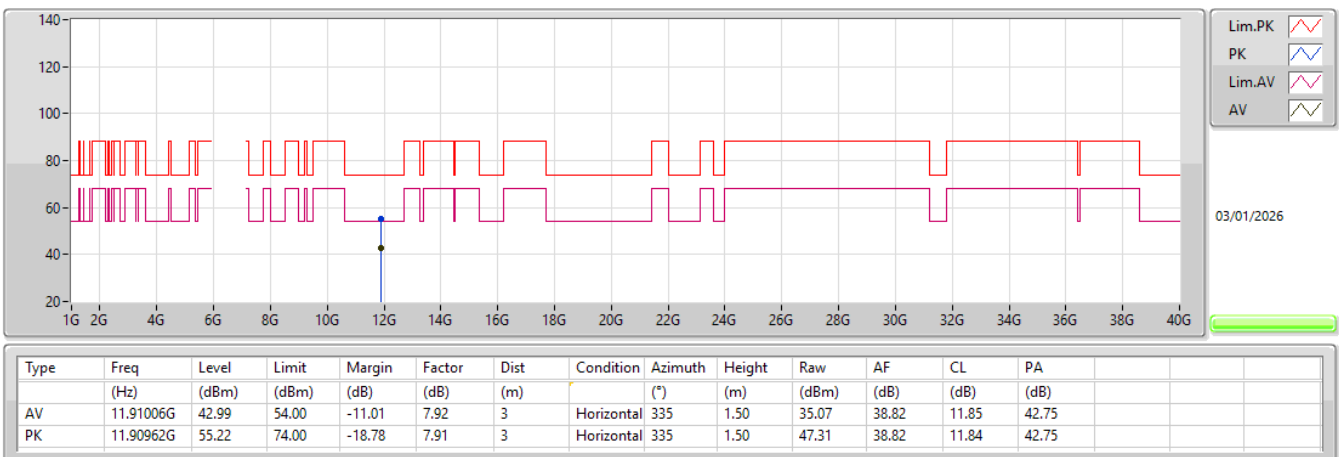


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

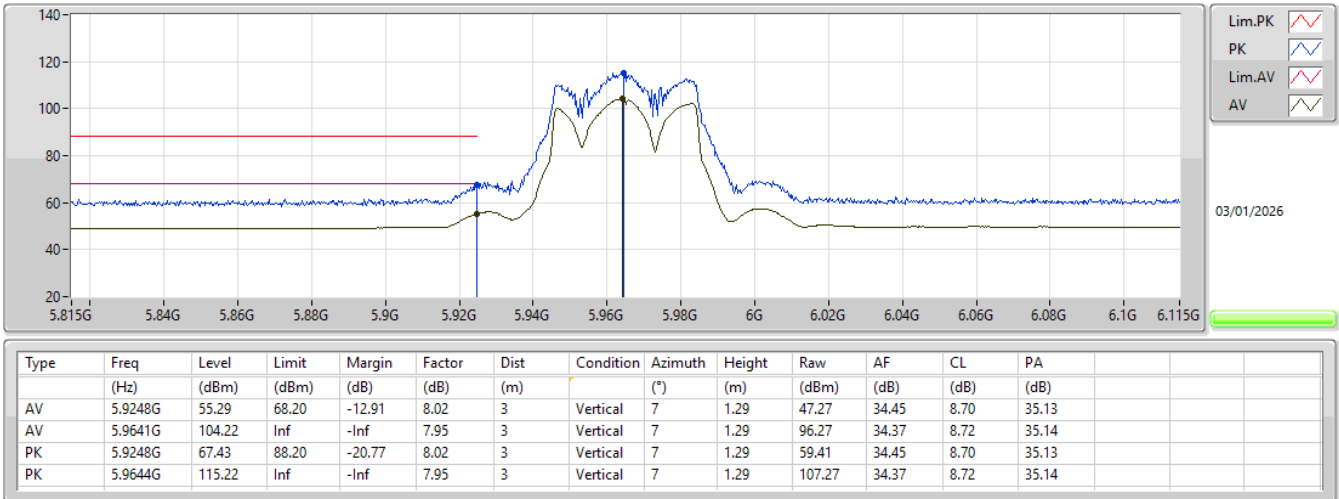


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

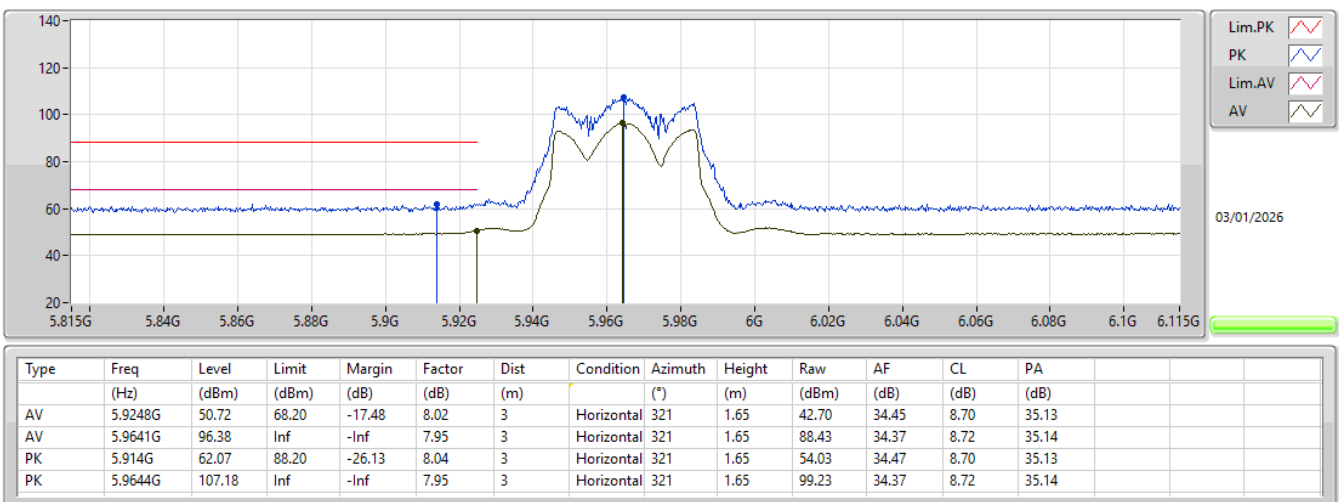


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

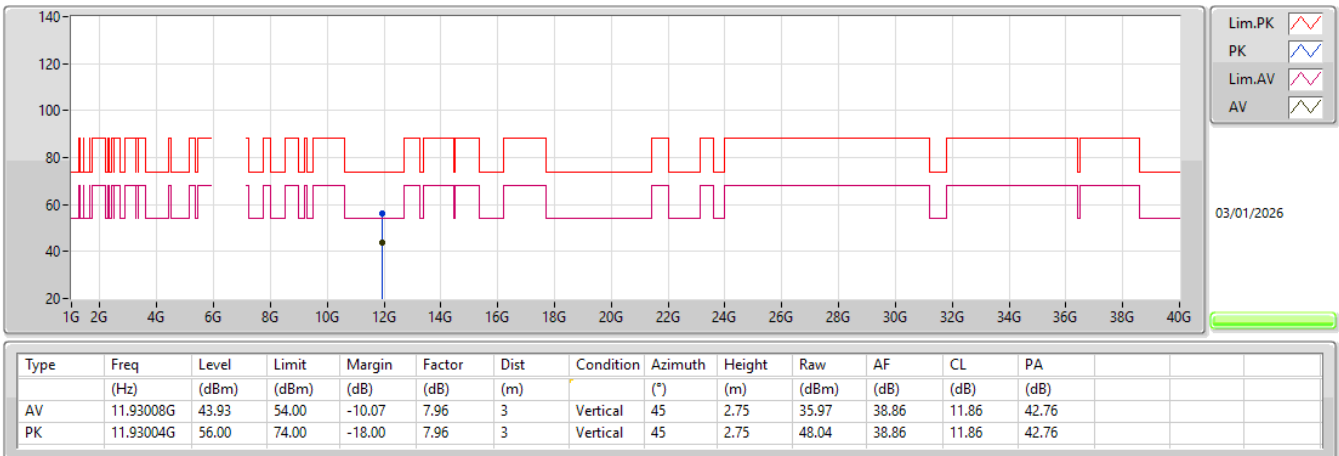


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

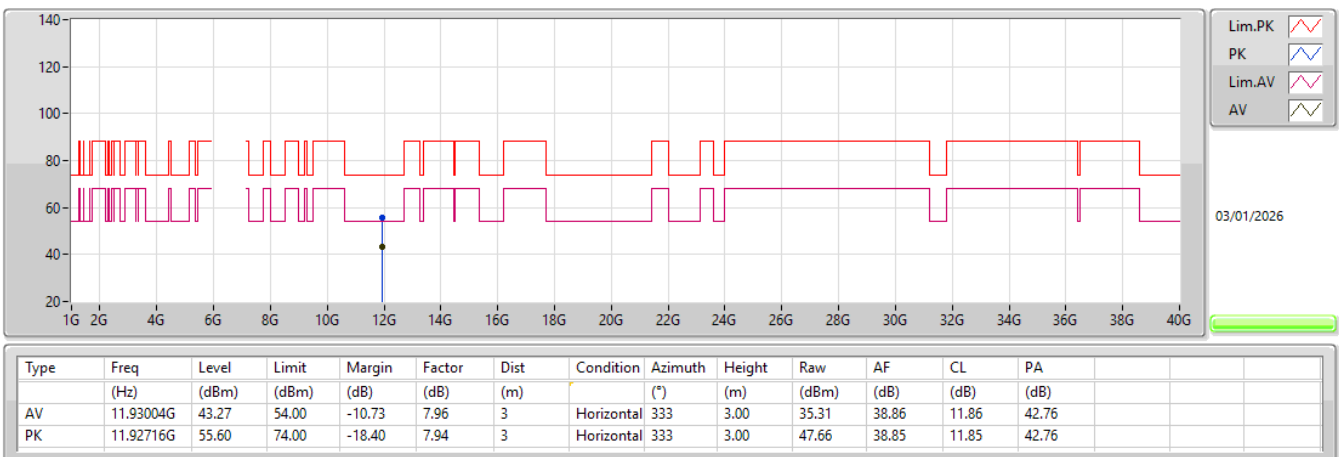


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

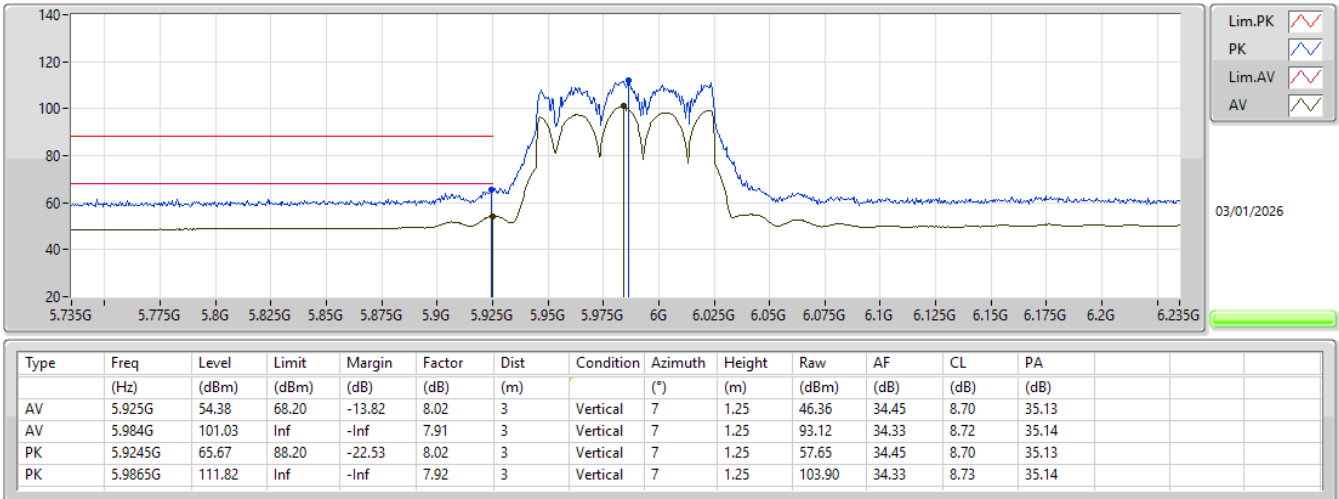


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

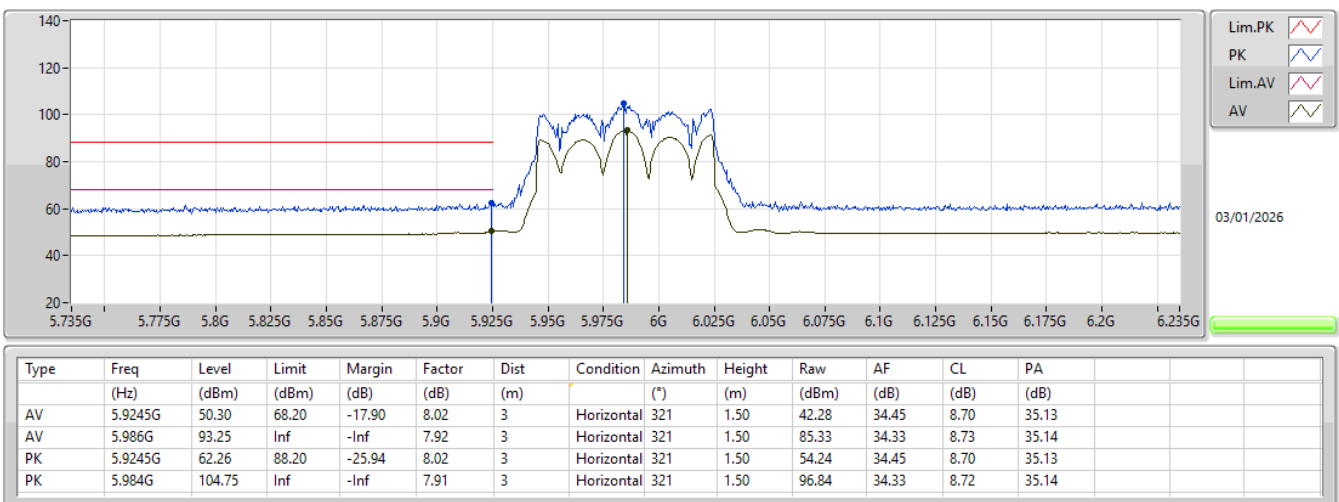


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

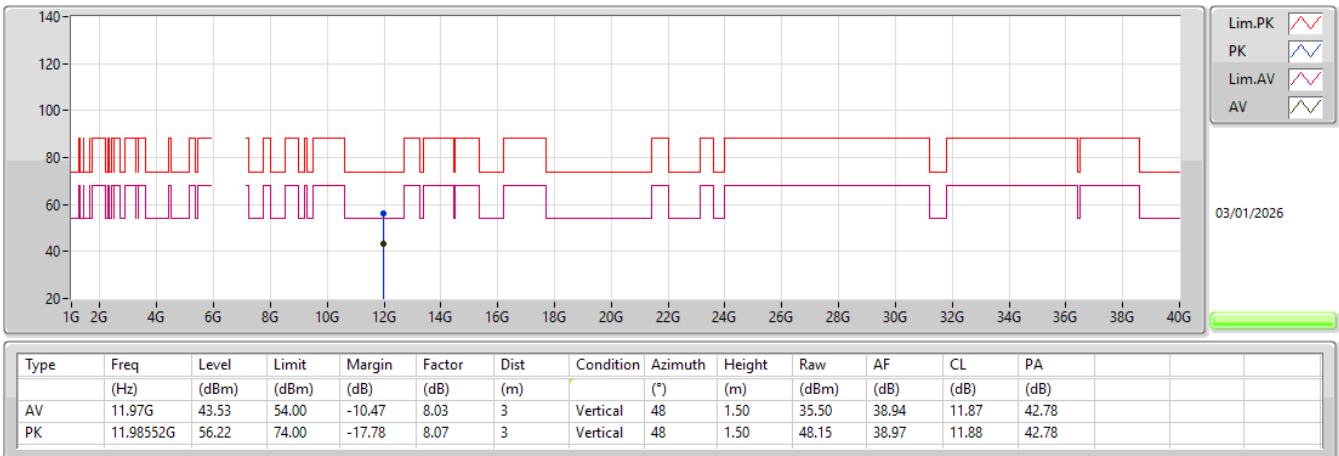


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

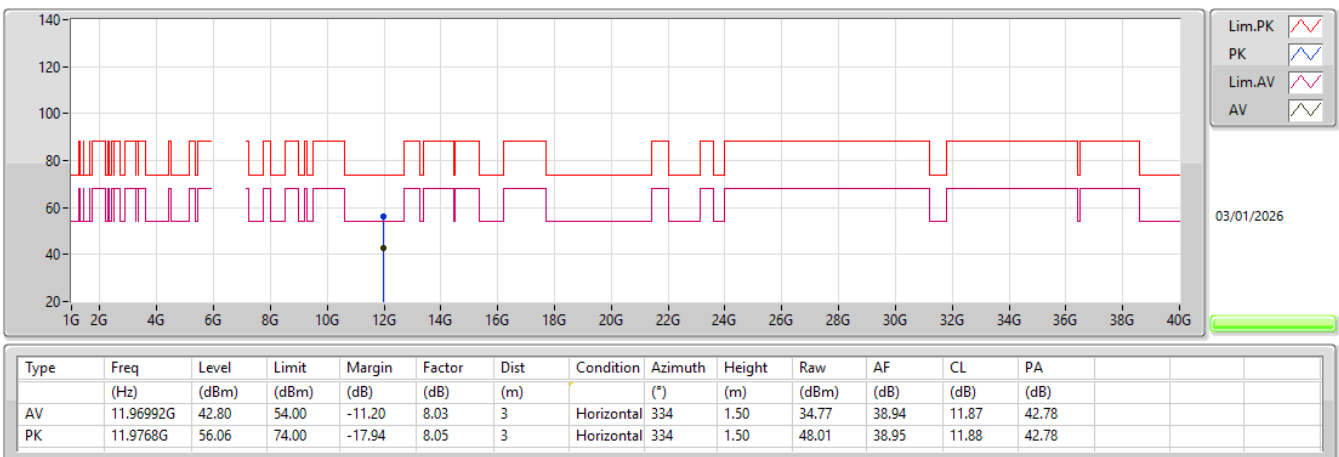


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

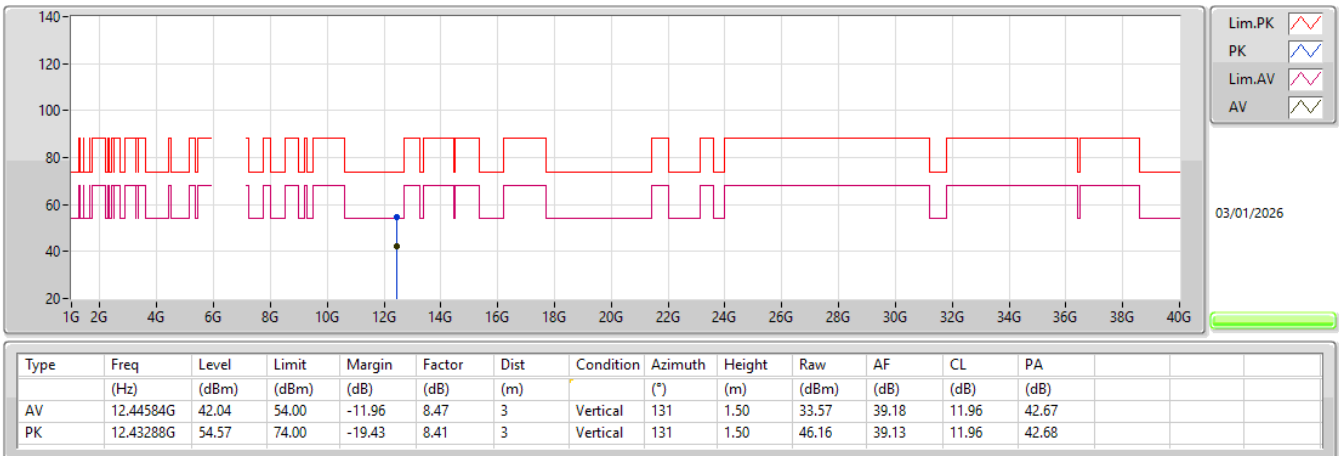


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

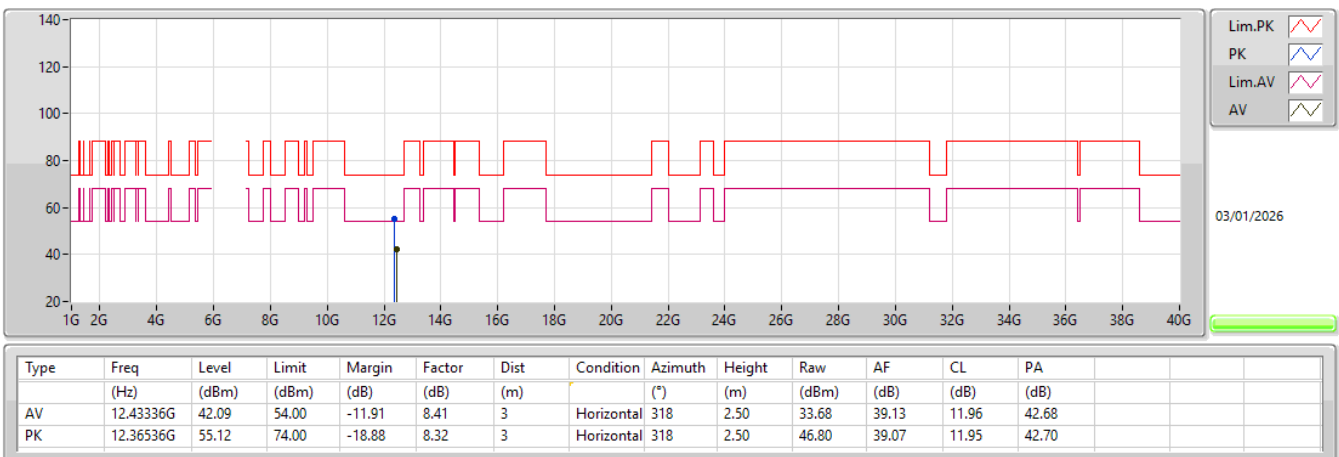


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

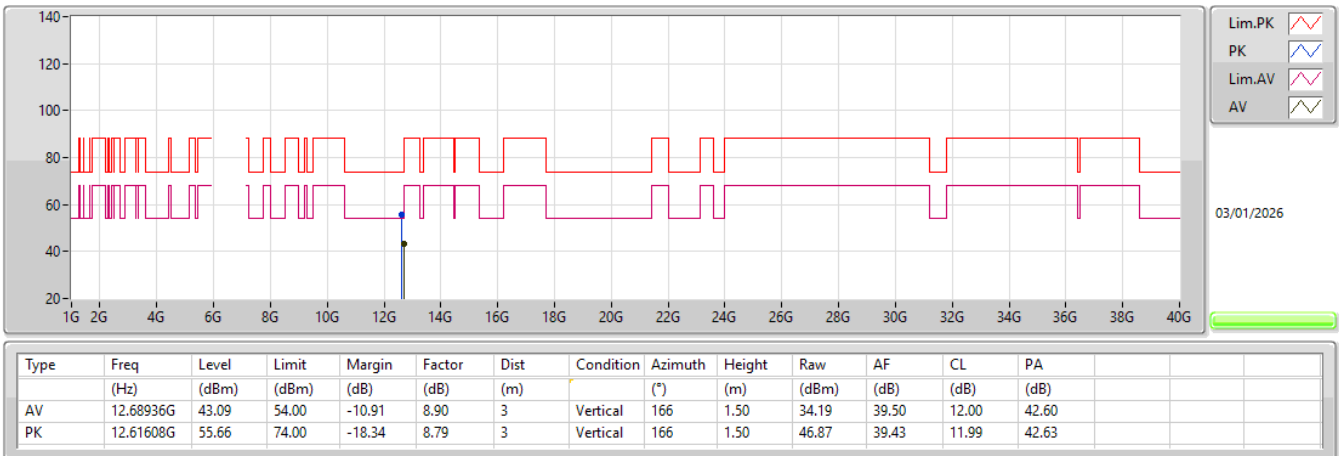


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

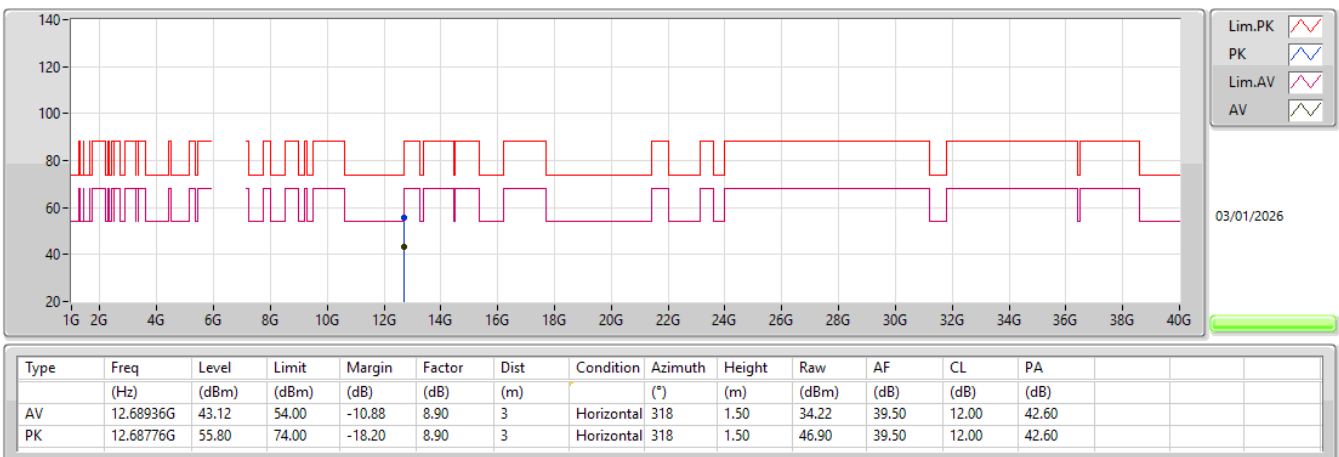


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

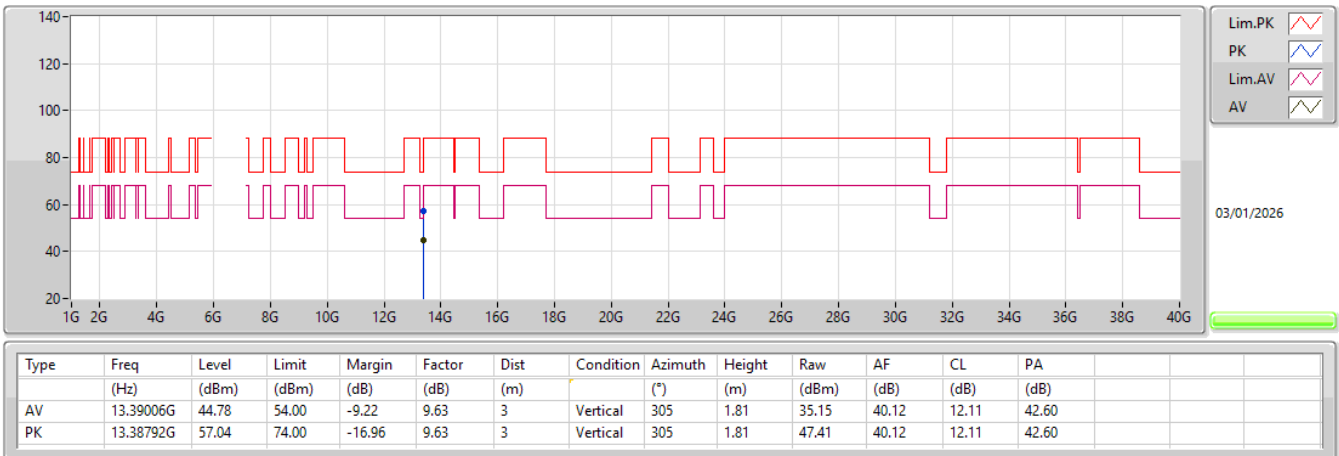


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

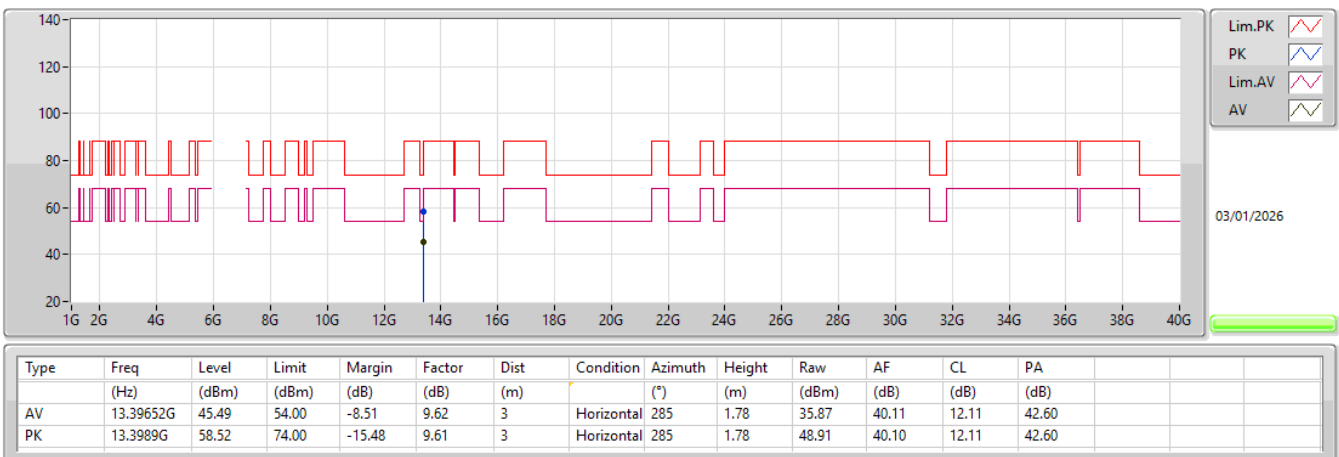


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

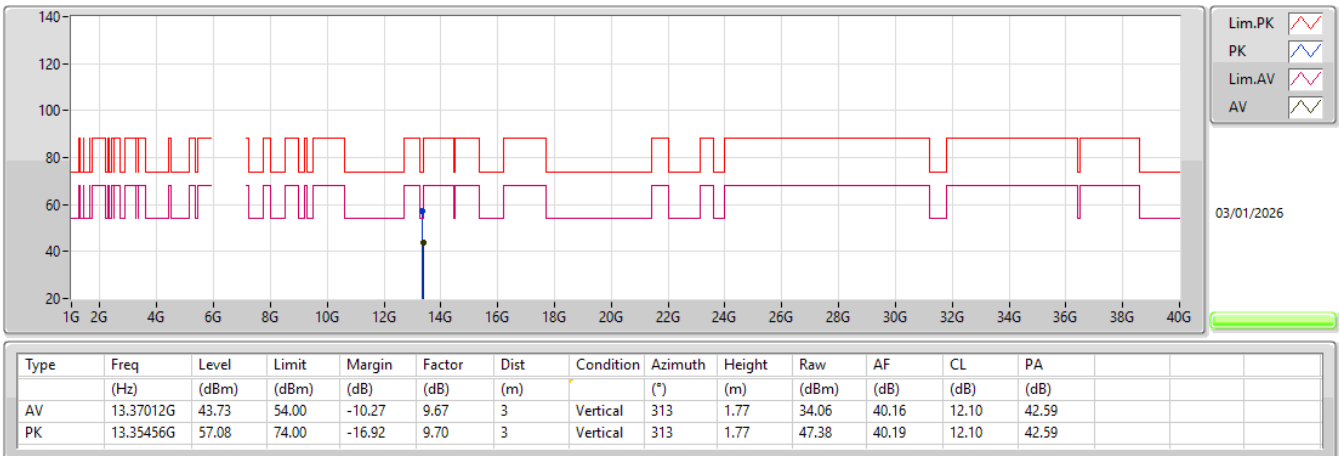


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

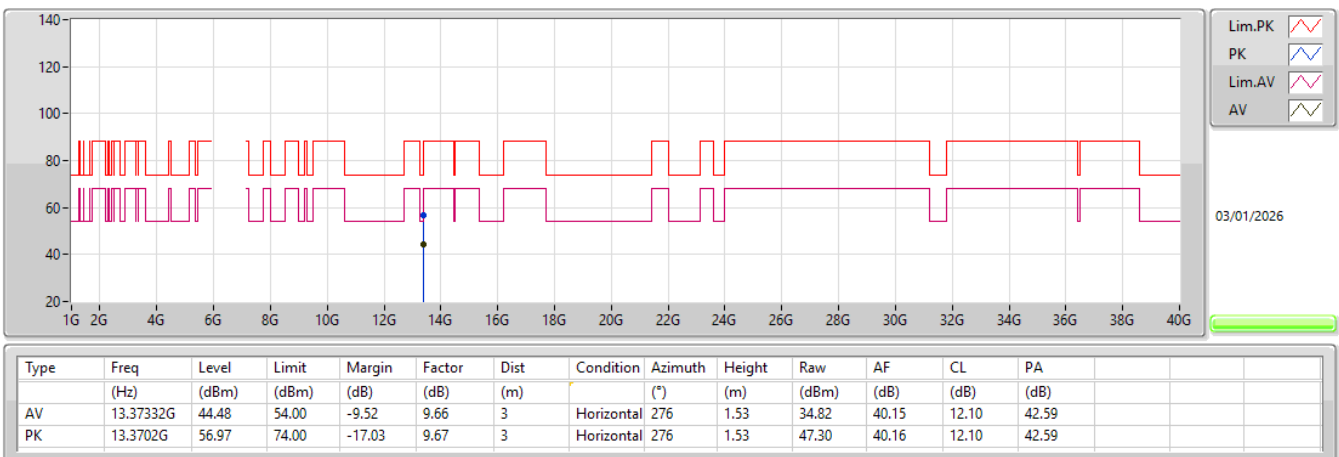


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

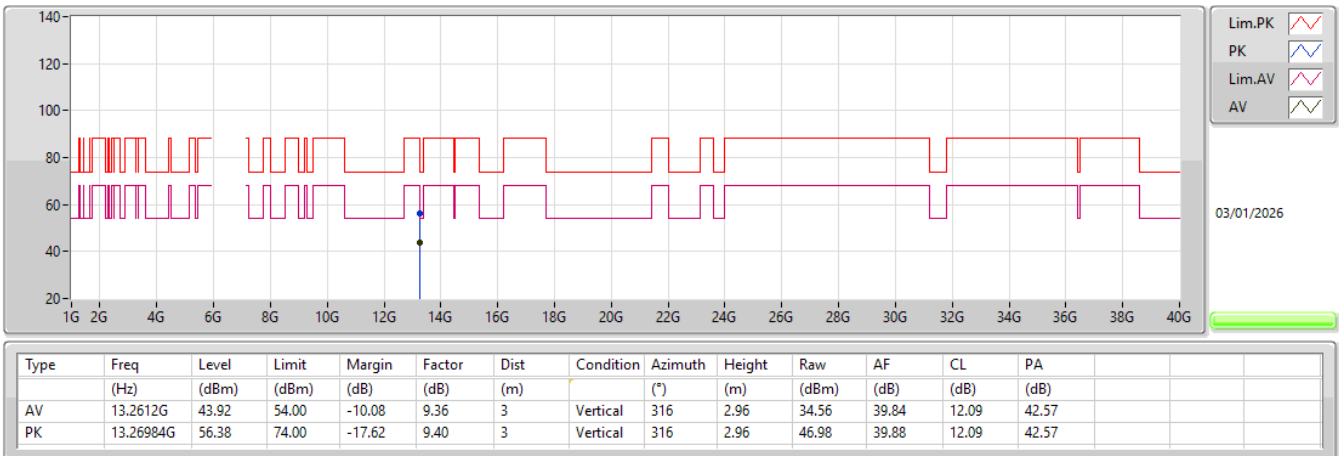


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

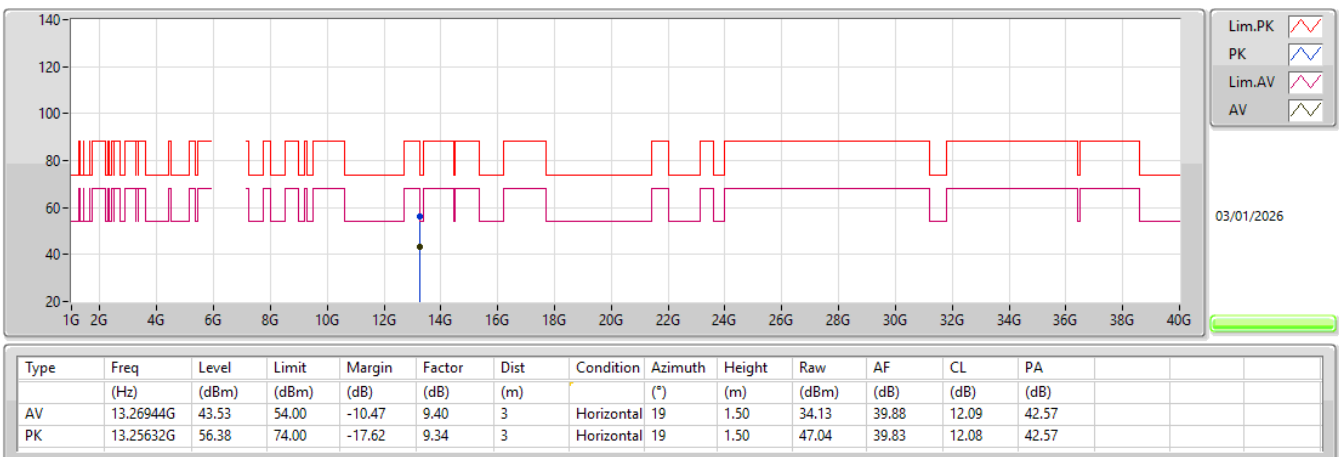


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

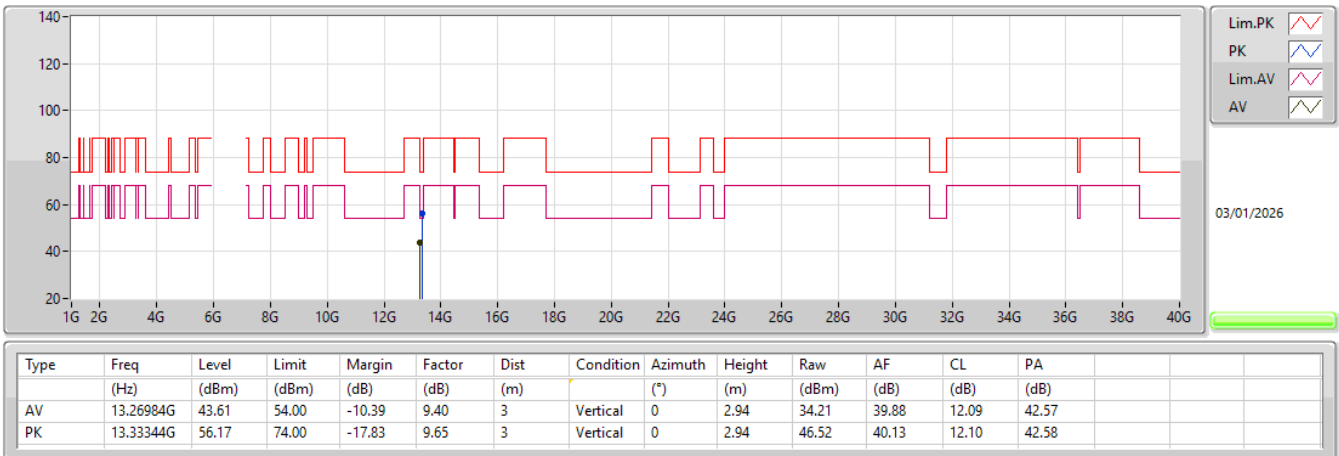

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

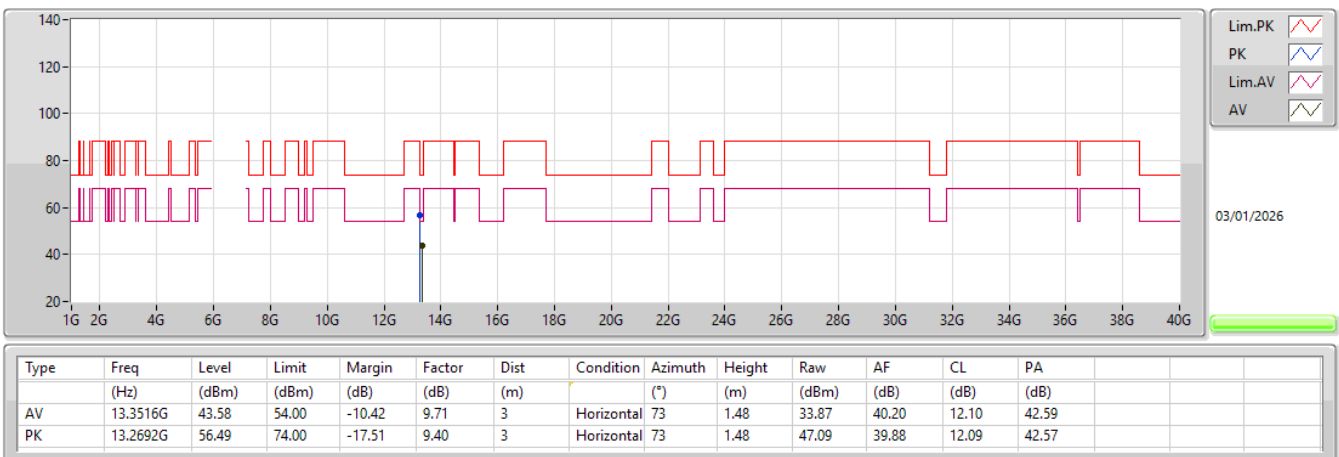

**Summary**


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	Pass	AV	5.9244G	54.41	68.20	-13.79	3	Vertical	3	1.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	Pass	AV	12.10824G	39.48	54.00	-14.52	3	Horizontal	289	1.50
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	Pass	AV	12.14472G	39.31	54.00	-14.69	3	Vertical	246	1.01

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	AV	5.9244G	54.41	68.20	-13.79	3	Vertical	3	1.00
5985MHz	Pass	AV	6.0216G	99.50	Inf	-Inf	3	Vertical	3	1.00
5985MHz	Pass	PK	5.919G	71.15	88.20	-17.05	3	Vertical	3	1.00
5985MHz	Pass	PK	6.0096G	111.82	Inf	-Inf	3	Vertical	3	1.00
5985MHz	Pass	AV	5.925G	49.19	68.20	-19.01	3	Horizontal	322	1.69
5985MHz	Pass	AV	5.9814G	94.73	Inf	-Inf	3	Horizontal	322	1.69
5985MHz	Pass	PK	5.919G	63.92	88.20	-24.28	3	Horizontal	322	1.69
5985MHz	Pass	PK	5.9796G	105.82	Inf	-Inf	3	Horizontal	322	1.69
5985MHz	Pass	AV	11.97G	39.49	54.00	-14.51	3	Vertical	52	1.50
5985MHz	Pass	PK	11.9492G	51.39	74.00	-22.61	3	Vertical	52	1.50
5985MHz	Pass	AV	11.96984G	39.35	54.00	-14.65	3	Horizontal	40	2.53
5985MHz	Pass	PK	11.99608G	51.11	74.00	-22.89	3	Horizontal	40	2.53
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.923G	50.69	68.20	-17.51	3	Vertical	8	1.50
6025MHz	Pass	AV	6.0995G	96.36	Inf	-Inf	3	Vertical	8	1.50
6025MHz	Pass	PK	5.9005G	65.01	88.20	-23.19	3	Vertical	8	1.50
6025MHz	Pass	PK	6.0985G	107.84	Inf	-Inf	3	Vertical	8	1.50
6025MHz	Pass	AV	5.9245G	48.44	68.20	-19.76	3	Horizontal	321	1.68
6025MHz	Pass	AV	5.981G	91.19	Inf	-Inf	3	Horizontal	321	1.68
6025MHz	Pass	PK	5.919G	59.48	88.20	-28.72	3	Horizontal	321	1.68
6025MHz	Pass	PK	5.9595G	101.98	Inf	-Inf	3	Horizontal	321	1.68
6025MHz	Pass	AV	12.082G	39.45	54.00	-14.55	3	Vertical	360	1.22
6025MHz	Pass	PK	12.03912G	51.65	74.00	-22.35	3	Vertical	360	1.22
6025MHz	Pass	AV	12.10824G	39.48	54.00	-14.52	3	Horizontal	289	1.50
6025MHz	Pass	PK	12.16392G	51.73	74.00	-22.27	3	Horizontal	289	1.50
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.924G	48.53	68.20	-19.67	3	Vertical	348	1.50
6105MHz	Pass	AV	6.204G	93.61	Inf	-Inf	3	Vertical	348	1.50
6105MHz	Pass	PK	5.925G	62.30	88.20	-25.90	3	Vertical	348	1.50
6105MHz	Pass	PK	6.238G	105.43	Inf	-Inf	3	Vertical	348	1.50
6105MHz	Pass	AV	5.925G	47.23	68.20	-20.97	3	Horizontal	320	1.68
6105MHz	Pass	AV	5.981G	88.40	Inf	-Inf	3	Horizontal	320	1.68
6105MHz	Pass	PK	5.793G	58.56	88.20	-29.64	3	Horizontal	320	1.68
6105MHz	Pass	PK	5.962G	100.21	Inf	-Inf	3	Horizontal	320	1.68
6105MHz	Pass	AV	12.14472G	39.31	54.00	-14.69	3	Vertical	246	1.01
6105MHz	Pass	PK	12.19528G	51.61	74.00	-22.39	3	Vertical	246	1.01
6105MHz	Pass	AV	12.11272G	39.13	54.00	-14.87	3	Horizontal	198	1.50
6105MHz	Pass	PK	12.20552G	51.37	74.00	-22.63	3	Horizontal	198	1.50


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5985MHz_TX

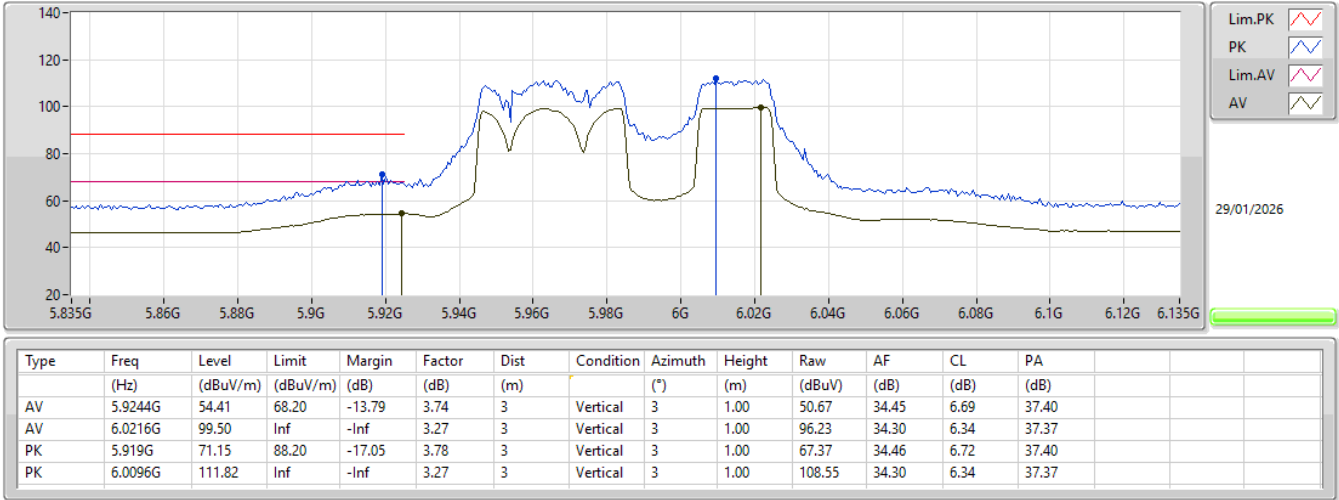


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5985MHz_TX

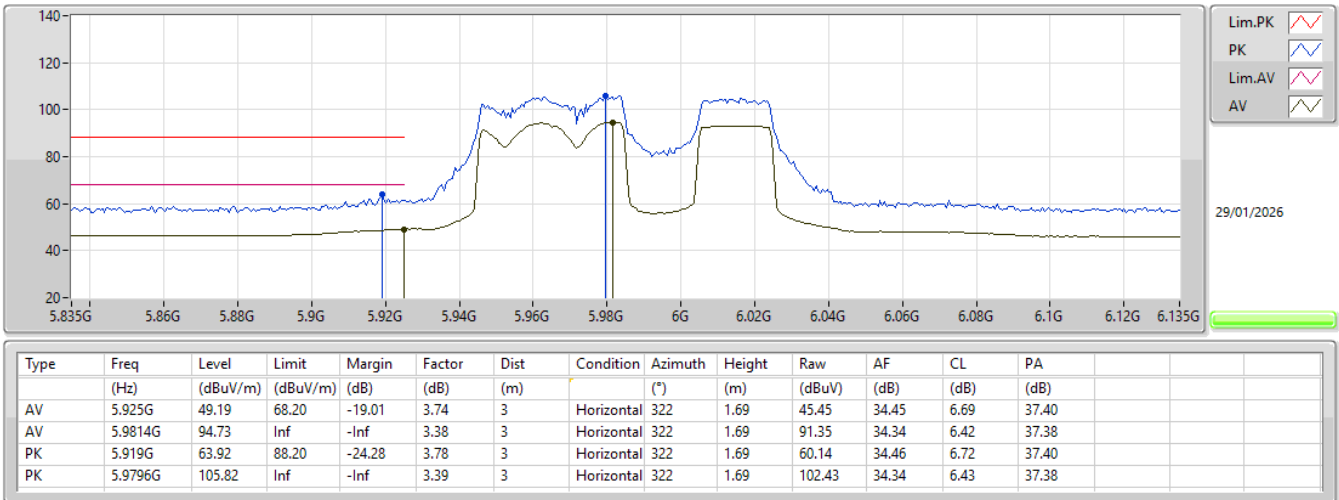


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5985MHz_TX

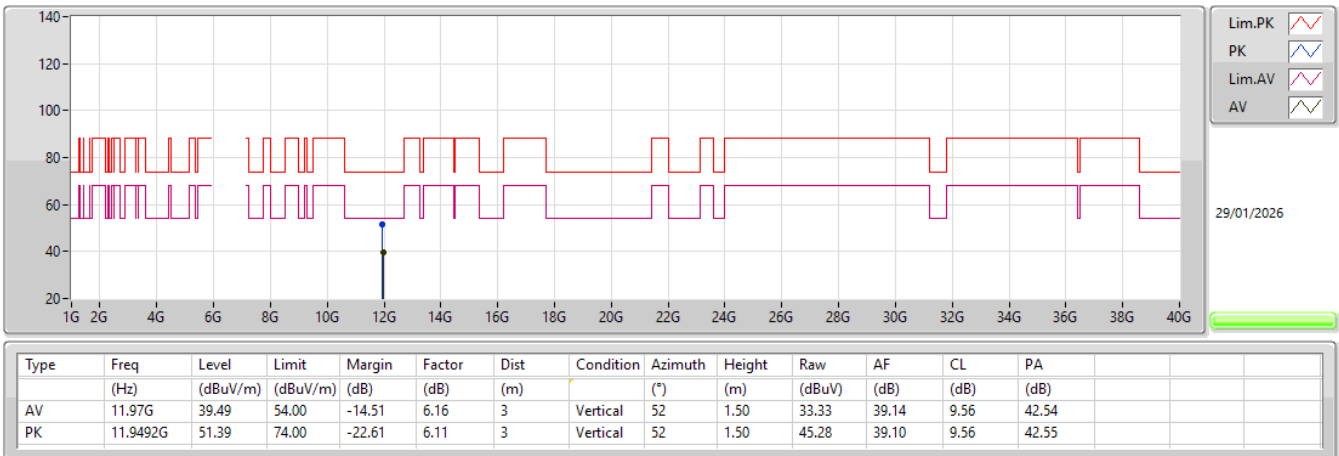


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5985MHz_TX

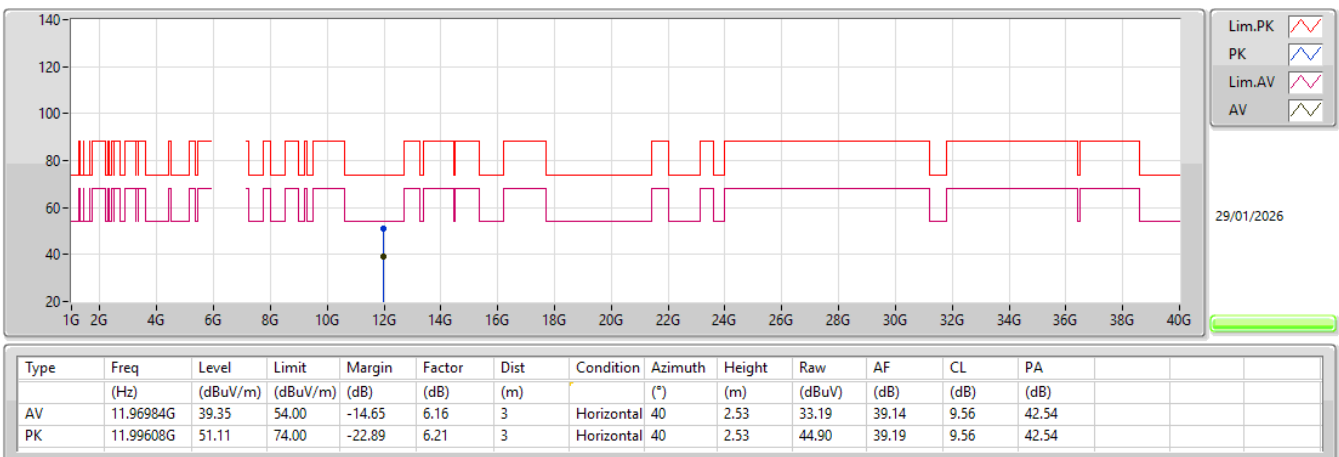


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

6025MHz_TX

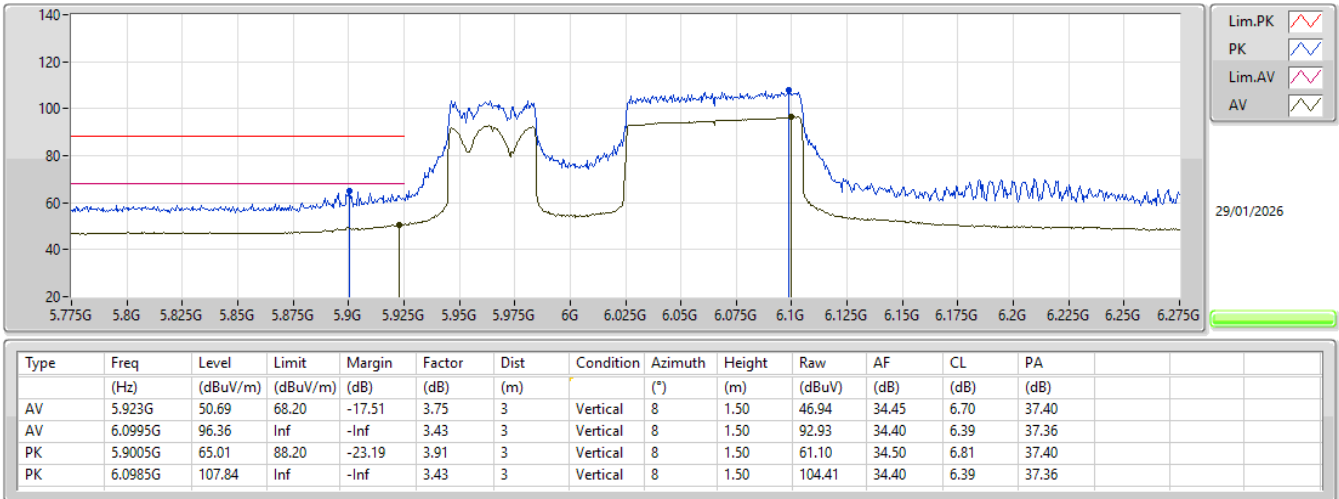


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

6025MHz_TX

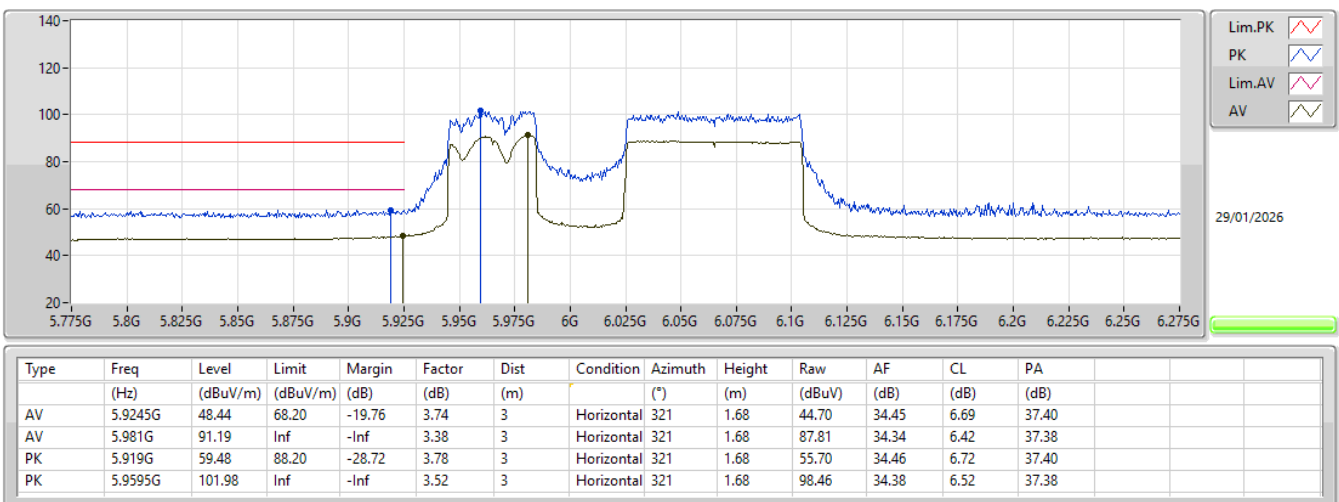


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

6025MHz_TX

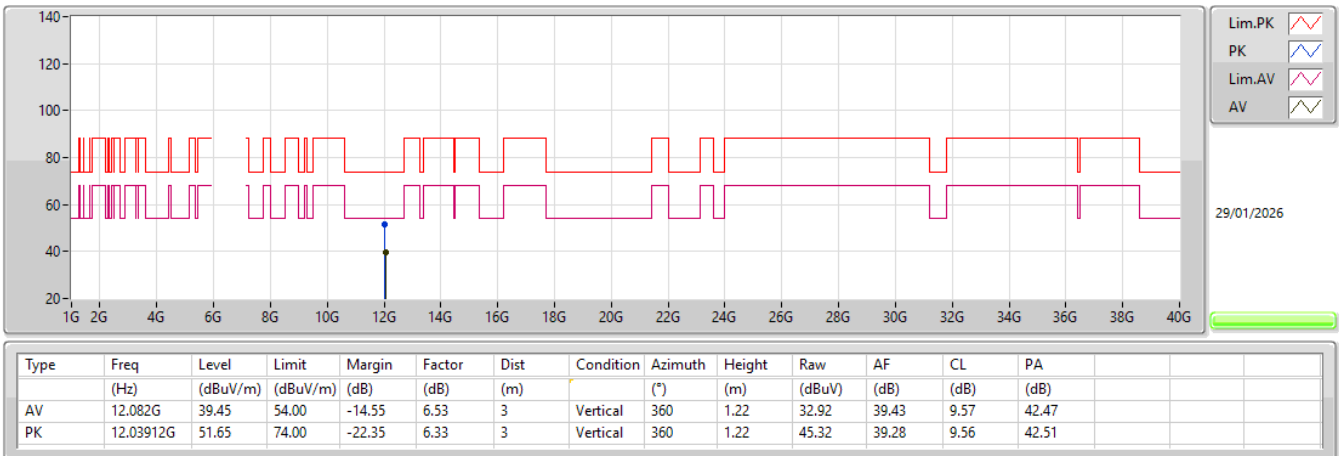


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

6025MHz_TX

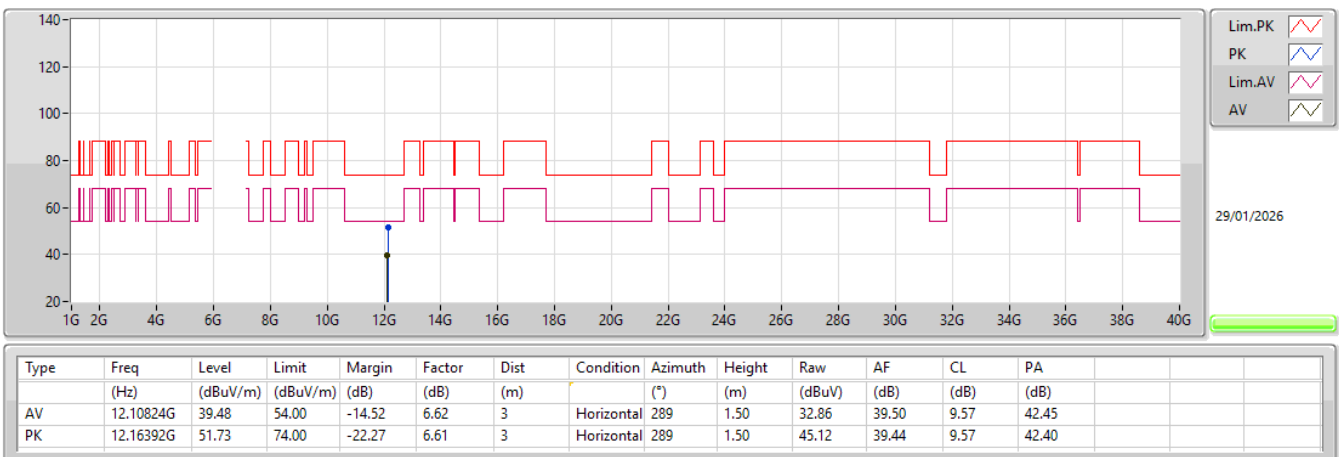


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

6105MHz_TX

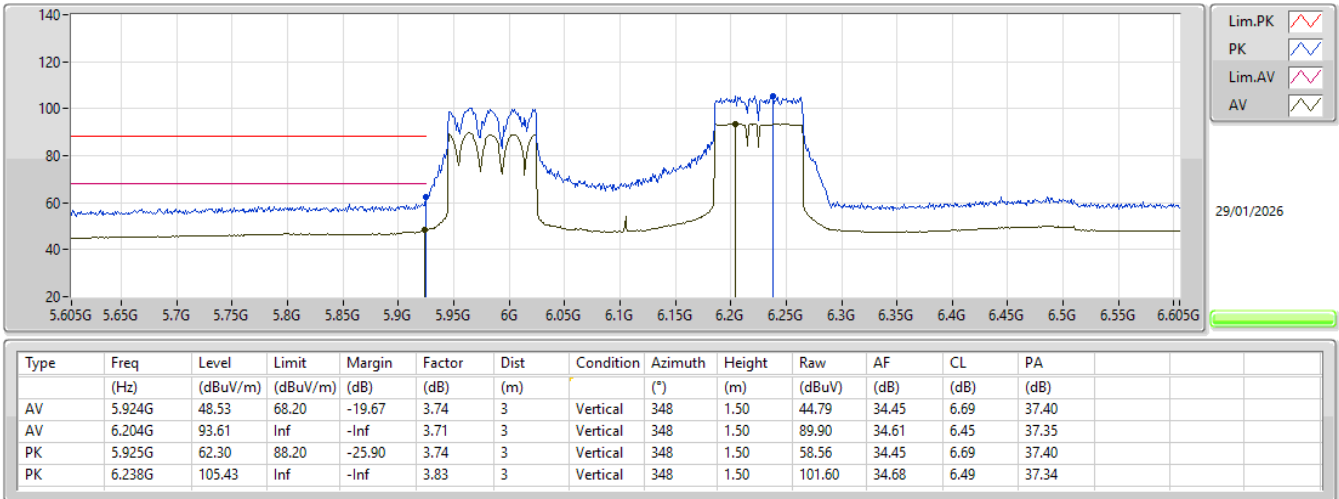


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

6105MHz_TX

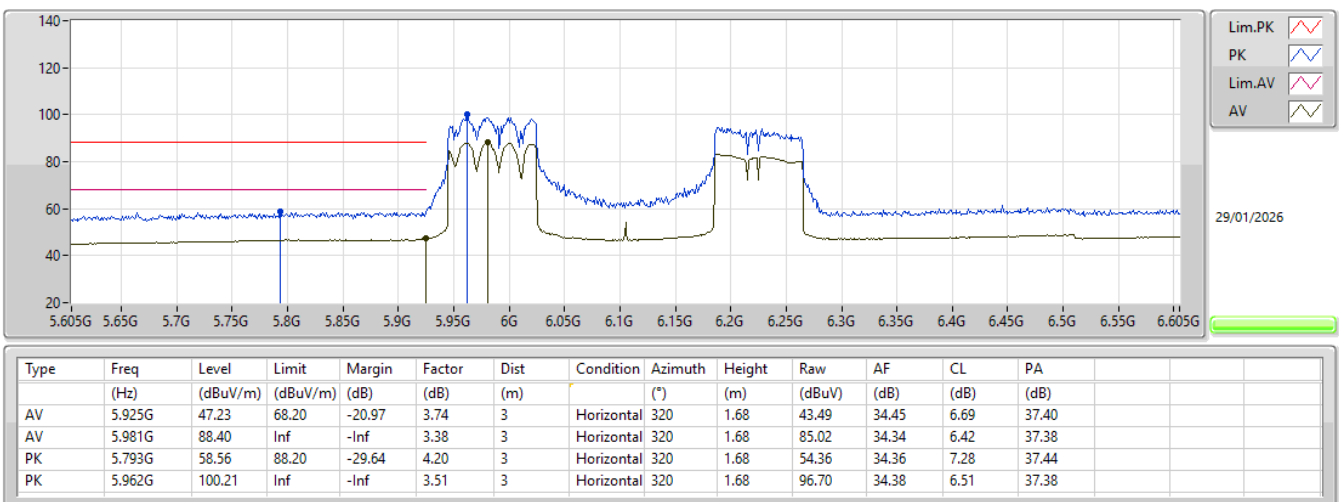


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

6105MHz_TX

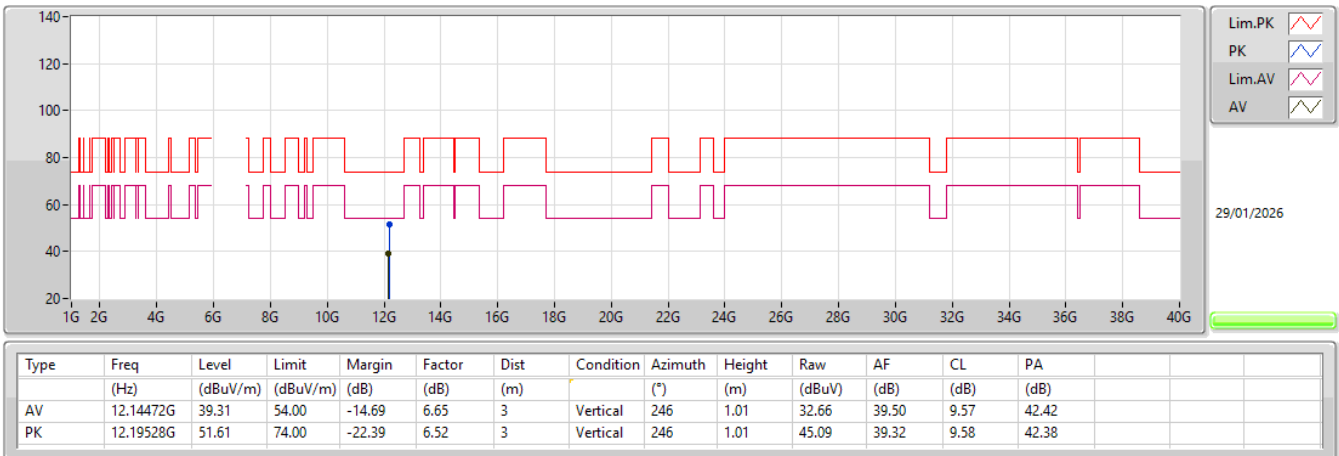

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX

6105MHz_TX

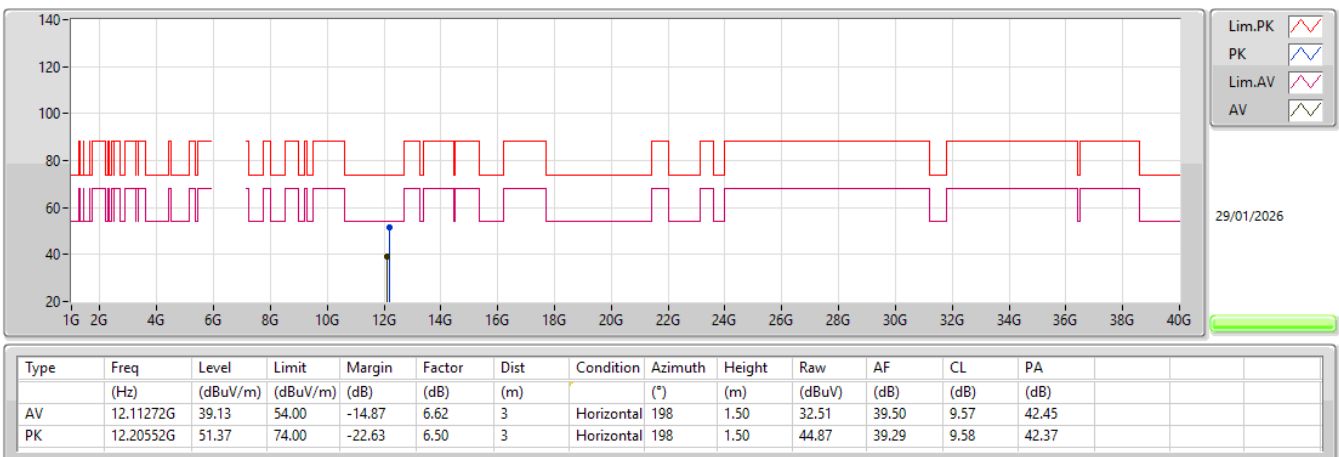

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	Pass	AV	5.925G	55.36	68.20	-12.84	3	Vertical	5	1.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	Pass	PK	5.919G	74.64	88.20	-13.56	3	Vertical	1	1.01
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX	Pass	AV	12.1124G	38.85	54.00	-15.15	3	Horizontal	55	1.81

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	AV	5.925G	55.36	68.20	-12.84	3	Vertical	5	1.00
5985MHz	Pass	AV	5.986G	98.21	Inf	-Inf	3	Vertical	5	1.00
5985MHz	Pass	PK	5.924G	70.74	88.20	-17.46	3	Vertical	5	1.00
5985MHz	Pass	PK	5.987G	108.72	Inf	-Inf	3	Vertical	5	1.00
5985MHz	Pass	AV	5.925G	49.51	68.20	-18.69	3	Horizontal	325	1.49
5985MHz	Pass	AV	5.987G	92.61	Inf	-Inf	3	Horizontal	325	1.49
5985MHz	Pass	PK	5.92G	63.09	88.20	-25.11	3	Horizontal	325	1.49
5985MHz	Pass	PK	5.987G	102.80	Inf	-Inf	3	Horizontal	325	1.49
5985MHz	Pass	AV	11.96992G	39.28	54.00	-14.72	3	Vertical	53	1.52
5985MHz	Pass	PK	11.93264G	50.95	74.00	-23.05	3	Vertical	53	1.52
5985MHz	Pass	AV	11.98368G	38.34	54.00	-15.66	3	Horizontal	56	2.14
5985MHz	Pass	PK	11.99624G	50.10	74.00	-23.90	3	Horizontal	56	2.14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.92G	52.30	68.20	-15.90	3	Vertical	8	1.92
6025MHz	Pass	AV	6.101G	94.83	Inf	-Inf	3	Vertical	8	1.92
6025MHz	Pass	PK	5.899G	69.02	88.20	-19.18	3	Vertical	8	1.92
6025MHz	Pass	PK	6.101G	106.41	Inf	-Inf	3	Vertical	8	1.92
6025MHz	Pass	AV	5.925G	48.76	68.20	-19.44	3	Horizontal	325	1.50
6025MHz	Pass	AV	6.027G	89.00	Inf	-Inf	3	Horizontal	325	1.50
6025MHz	Pass	PK	5.925G	63.34	88.20	-24.86	3	Horizontal	325	1.50
6025MHz	Pass	PK	6.027G	100.87	Inf	-Inf	3	Horizontal	325	1.50
6025MHz	Pass	AV	12.1292G	38.83	54.00	-15.17	3	Vertical	23	1.50
6025MHz	Pass	PK	12.11384G	51.17	74.00	-22.83	3	Vertical	23	1.50
6025MHz	Pass	AV	12.04984G	38.97	54.00	-15.03	3	Horizontal	72	1.50
6025MHz	Pass	PK	12.11992G	51.41	74.00	-22.59	3	Horizontal	72	1.50
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.923G	52.14	68.20	-16.06	3	Vertical	1	1.01
6025MHz	Pass	AV	6.042G	94.96	Inf	-Inf	3	Vertical	1	1.01
6025MHz	Pass	PK	5.919G	74.64	88.20	-13.56	3	Vertical	1	1.01
6025MHz	Pass	PK	6.041G	106.08	Inf	-Inf	3	Vertical	1	1.01
6025MHz	Pass	AV	5.925G	47.81	68.20	-20.39	3	Horizontal	325	2.13
6025MHz	Pass	AV	6.041G	89.20	Inf	-Inf	3	Horizontal	325	2.13
6025MHz	Pass	PK	5.919G	65.12	88.20	-23.08	3	Horizontal	325	2.13
6025MHz	Pass	PK	6.101G	100.82	Inf	-Inf	3	Horizontal	325	2.13
6025MHz	Pass	AV	12.11352G	39.20	54.00	-14.80	3	Vertical	270	1.50
6025MHz	Pass	PK	12.12424G	51.19	74.00	-22.81	3	Vertical	270	1.50
6025MHz	Pass	AV	12.11416G	39.12	54.00	-14.88	3	Horizontal	59	1.50
6025MHz	Pass	PK	12.0924G	51.04	74.00	-22.96	3	Horizontal	59	1.50
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.921G	47.88	68.20	-20.32	3	Vertical	7	1.96
6105MHz	Pass	AV	6.119G	92.12	Inf	-Inf	3	Vertical	7	1.96
6105MHz	Pass	PK	5.921G	60.10	88.20	-28.10	3	Vertical	7	1.96
6105MHz	Pass	PK	6.119G	103.33	Inf	-Inf	3	Vertical	7	1.96
6105MHz	Pass	AV	5.925G	46.77	68.20	-21.43	3	Horizontal	326	1.50
6105MHz	Pass	AV	6.107G	85.10	Inf	-Inf	3	Horizontal	326	1.50
6105MHz	Pass	PK	5.833G	58.33	88.20	-29.87	3	Horizontal	326	1.50
6105MHz	Pass	PK	6.125G	95.94	Inf	-Inf	3	Horizontal	326	1.50
6105MHz	Pass	AV	12.12904G	38.78	54.00	-15.22	3	Vertical	208	1.46
6105MHz	Pass	PK	12.23848G	49.88	74.00	-24.12	3	Vertical	208	1.46
6105MHz	Pass	AV	12.1124G	38.85	54.00	-15.15	3	Horizontal	55	1.81
6105MHz	Pass	PK	12.07816G	49.99	74.00	-24.01	3	Horizontal	55	1.81
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.921G	47.31	68.20	-20.89	3	Vertical	7	1.90
6105MHz	Pass	AV	6.121G	92.15	Inf	-Inf	3	Vertical	7	1.90
6105MHz	Pass	PK	5.925G	59.41	88.20	-28.79	3	Vertical	7	1.90
6105MHz	Pass	PK	6.139G	103.16	Inf	-Inf	3	Vertical	7	1.90
6105MHz	Pass	AV	5.925G	46.58	68.20	-21.62	3	Horizontal	326	1.50
6105MHz	Pass	AV	6.107G	84.98	Inf	-Inf	3	Horizontal	326	1.50
6105MHz	Pass	PK	5.921G	59.62	88.20	-28.58	3	Horizontal	326	1.50
6105MHz	Pass	PK	6.107G	95.92	Inf	-Inf	3	Horizontal	326	1.50



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6105MHz	Pass	AV	12.09896G	38.79	54.00	-15.21	3	Vertical	303	2.23
6105MHz	Pass	PK	12.218G	50.50	74.00	-23.50	3	Vertical	303	2.23
6105MHz	Pass	AV	12.1124G	38.83	54.00	-15.17	3	Horizontal	56	1.50
6105MHz	Pass	PK	12.14824G	49.98	74.00	-24.02	3	Horizontal	56	1.50
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.923G	49.48	68.20	-18.72	3	Vertical	5	1.50
6105MHz	Pass	AV	6.103G	91.56	Inf	-Inf	3	Vertical	5	1.50
6105MHz	Pass	PK	5.919G	65.92	88.20	-22.28	3	Vertical	5	1.50
6105MHz	Pass	PK	6.099G	102.56	Inf	-Inf	3	Vertical	5	1.50
6105MHz	Pass	AV	5.925G	47.43	68.20	-20.77	3	Horizontal	324	1.50
6105MHz	Pass	AV	6.103G	85.30	Inf	-Inf	3	Horizontal	324	1.50
6105MHz	Pass	PK	5.925G	59.60	88.20	-28.60	3	Horizontal	324	1.50
6105MHz	Pass	PK	6.107G	96.71	Inf	-Inf	3	Horizontal	324	1.50
6105MHz	Pass	AV	12.12808G	38.78	54.00	-15.22	3	Vertical	117	2.96
6105MHz	Pass	PK	12.0612G	49.83	74.00	-24.17	3	Vertical	117	2.96
6105MHz	Pass	AV	12.1124G	38.83	54.00	-15.17	3	Horizontal	347	1.50
6105MHz	Pass	PK	12.07656G	50.73	74.00	-23.27	3	Horizontal	347	1.50


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5985MHz_TX

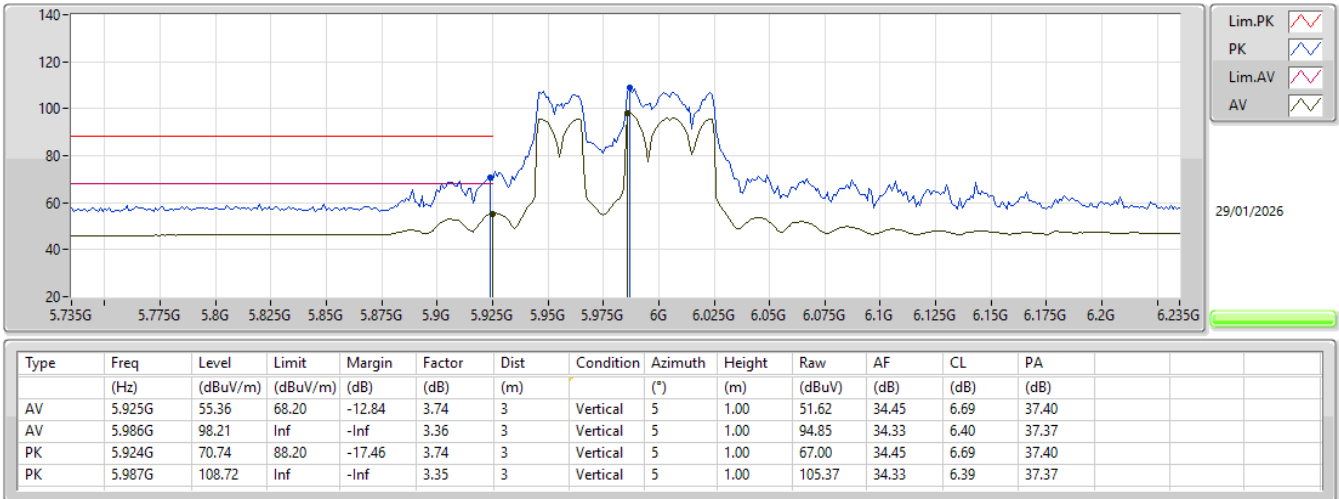


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5985MHz_TX

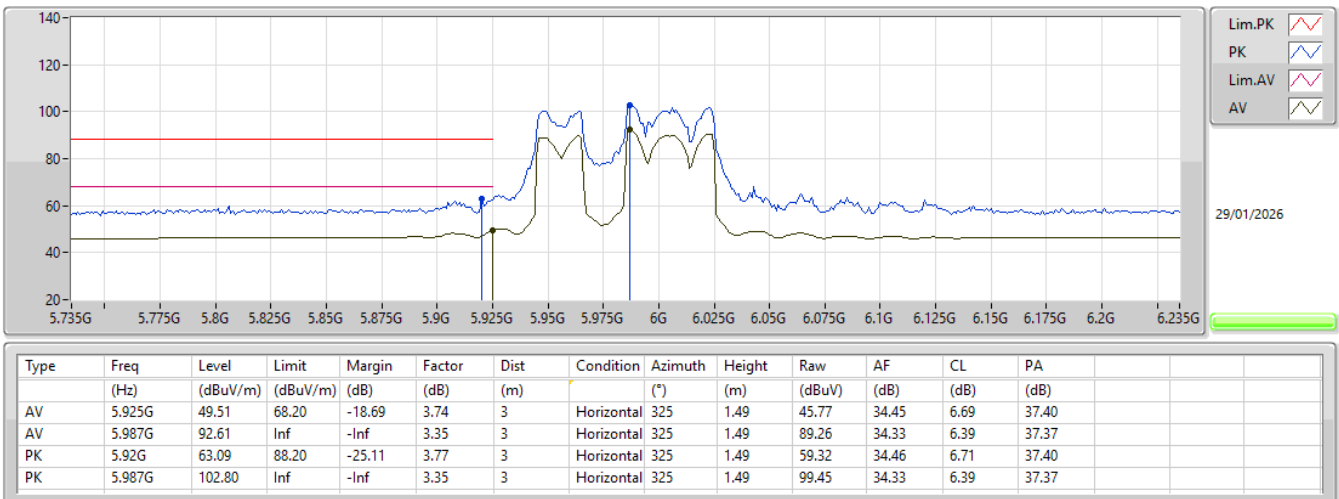


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5985MHz_TX

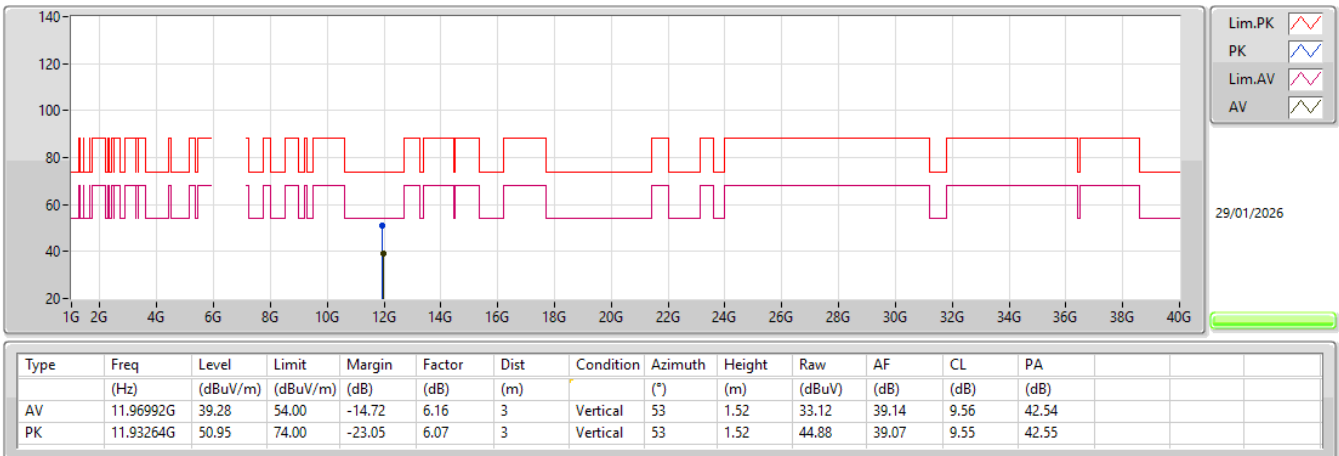


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5985MHz_TX

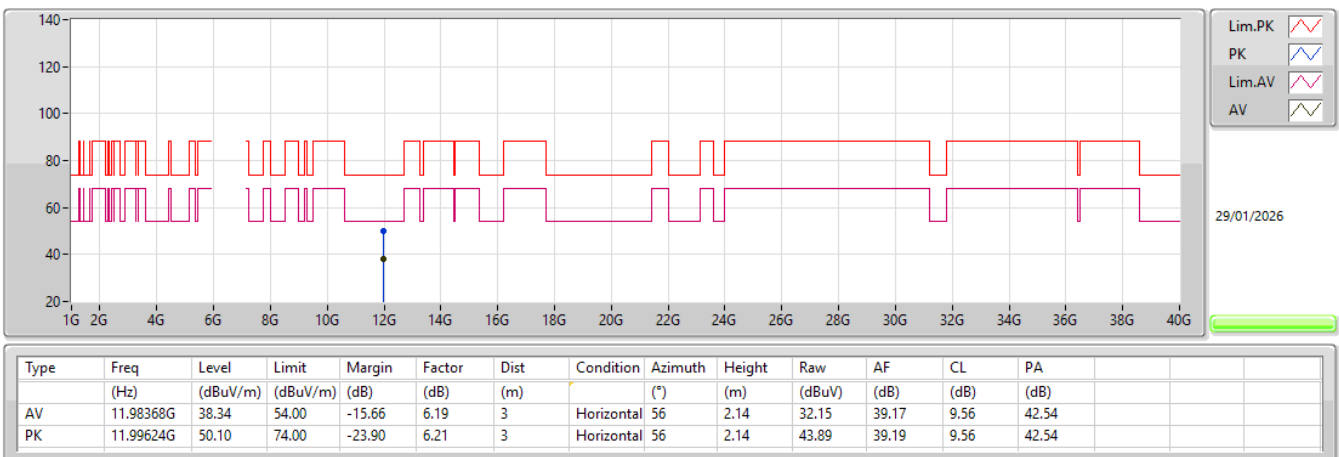


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX

6025MHz_TX

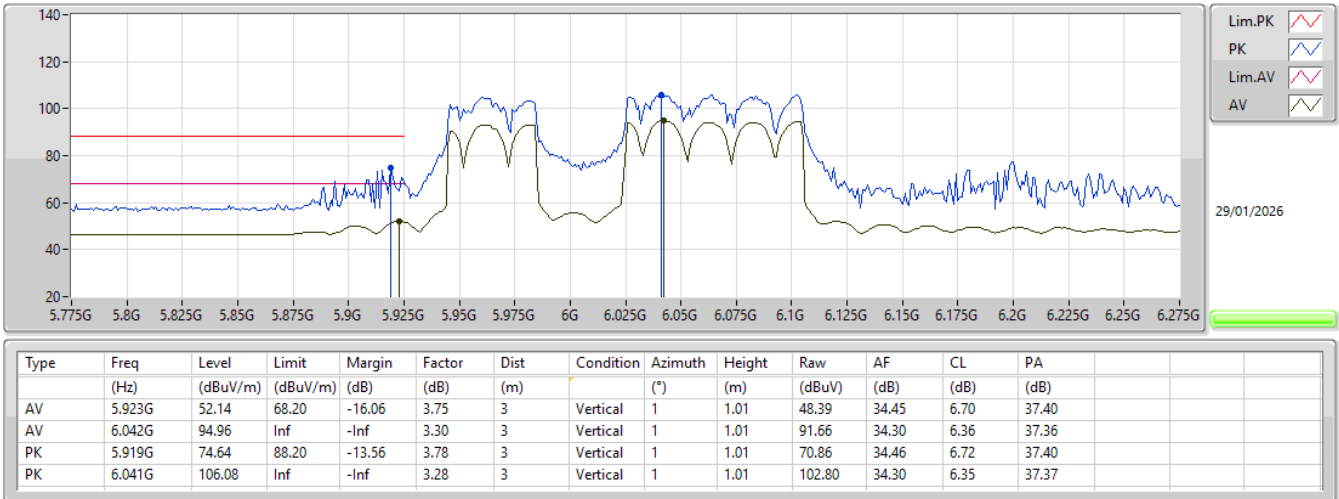


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX

6025MHz_TX

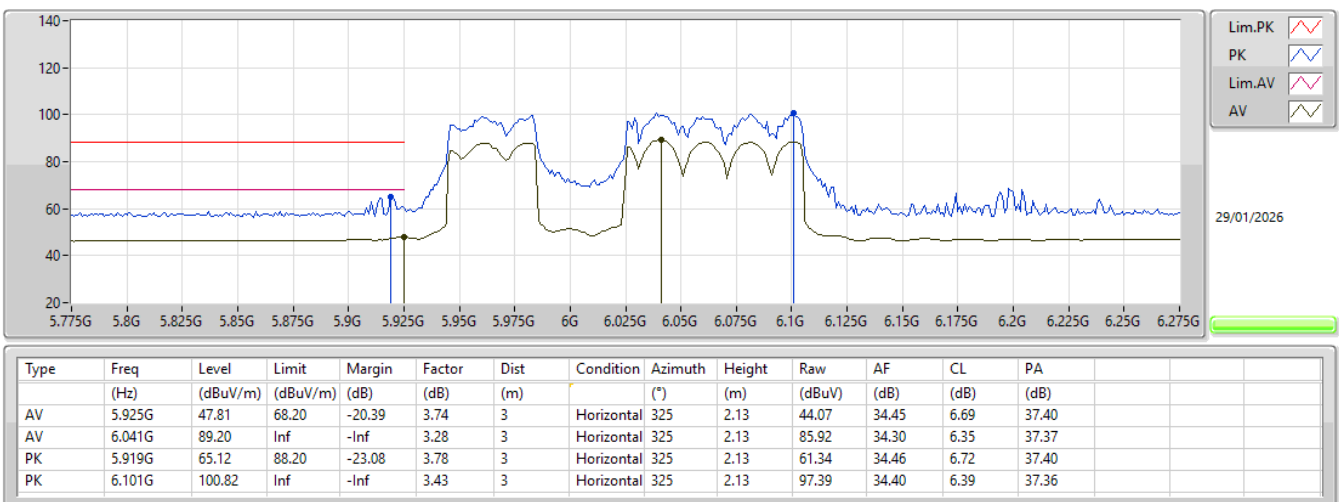


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX

6025MHz_TX

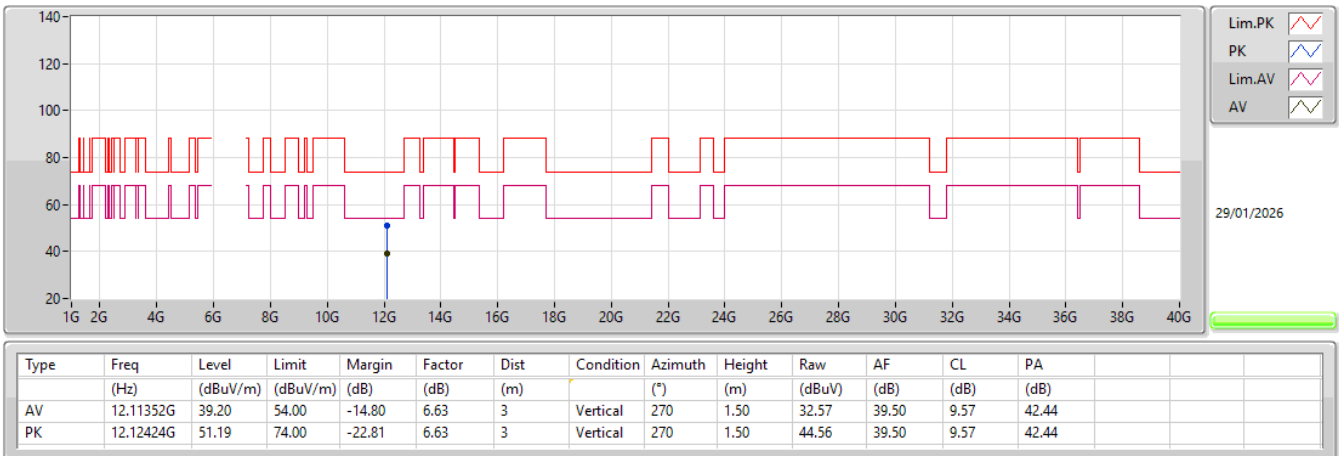


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX

6025MHz_TX

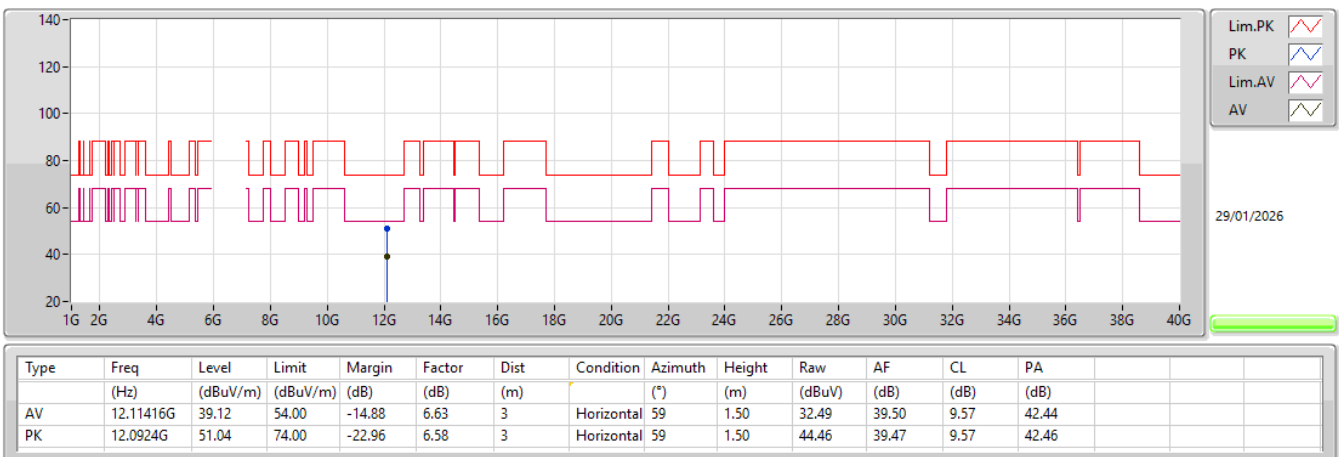

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX


6105MHz_TX

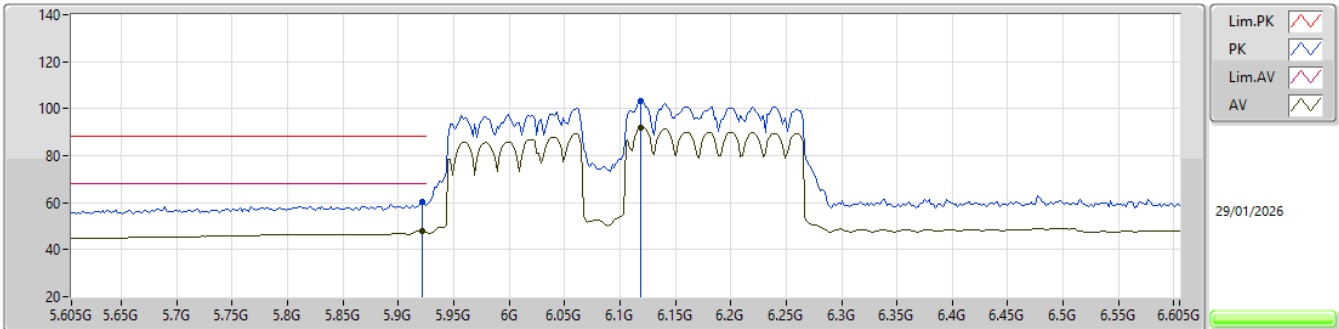

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.921G	47.88	68.20	-20.32	3.77	3	Vertical	7	1.96	44.11	34.46	6.71	37.40
AV	6.119G	92.12	Inf	-Inf	3.48	3	Vertical	7	1.96	88.64	34.44	6.40	37.36
PK	5.921G	60.10	88.20	-28.10	3.77	3	Vertical	7	1.96	56.33	34.46	6.71	37.40
PK	6.119G	103.33	Inf	-Inf	3.48	3	Vertical	7	1.96	99.85	34.44	6.40	37.36

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX


6105MHz_TX

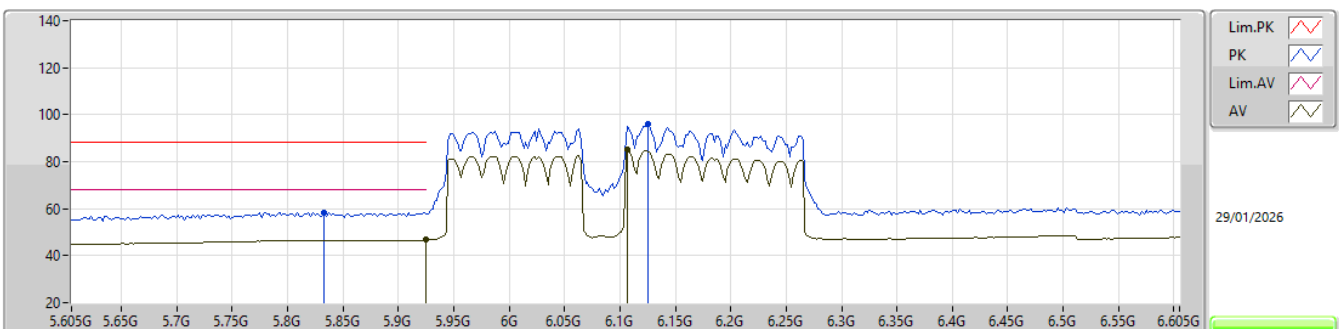

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(m)		(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.925G	46.77	68.20	-21.43	3.74	3	Horizontal	326	1.50	43.03	34.45	6.69	37.40
AV	6.107G	85.10	Inf	-Inf	3.44	3	Horizontal	326	1.50	81.66	34.41	6.39	37.36
PK	5.833G	58.33	88.20	-29.87	4.10	3	Horizontal	326	1.50	54.23	34.40	7.13	37.43
PK	6.125G	95.94	Inf	-Inf	3.51	3	Horizontal	326	1.50	92.43	34.45	6.41	37.35


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX

6105MHz_TX

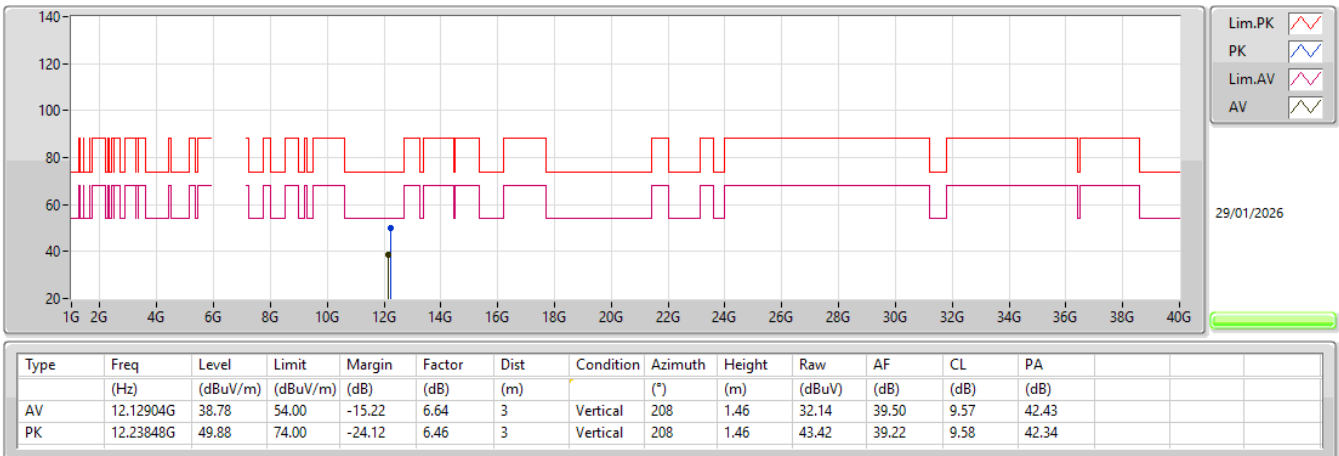

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_2TX

6105MHz_TX

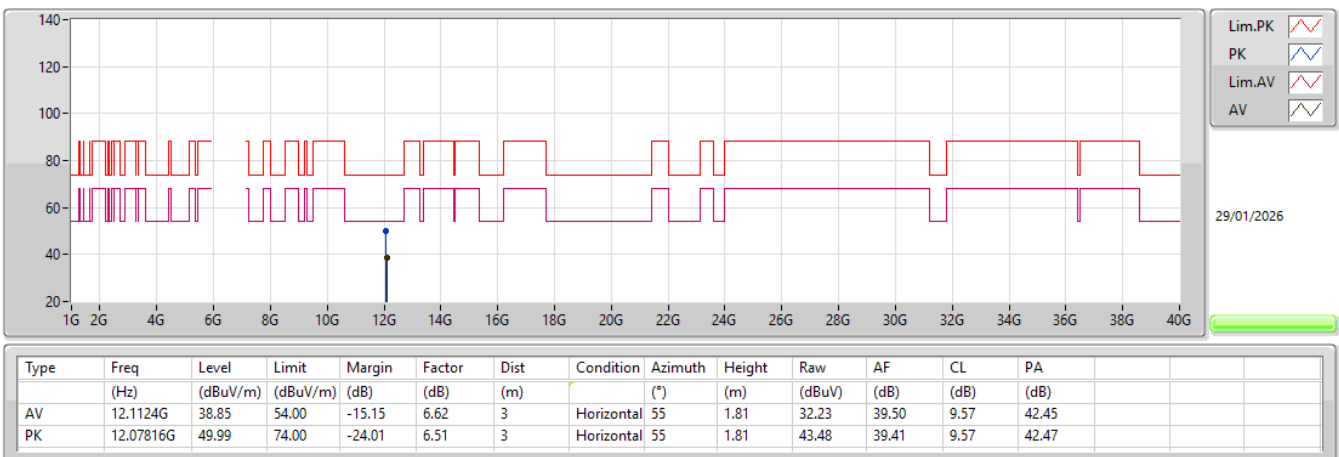



Summary


Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	41.64M	31.93	40.00	-8.07	3	Vertical	360	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6705MHz_PoE	Pass	PK	41.64M	31.93	40.00	-8.07	3	Vertical	360	1.00
6705MHz_PoE	Pass	PK	130.88M	15.15	43.50	-28.35	3	Vertical	360	1.00
6705MHz_PoE	Pass	PK	196.84M	13.98	43.50	-29.52	3	Vertical	360	1.00
6705MHz_PoE	Pass	PK	307.42M	14.99	46.00	-31.01	3	Vertical	360	1.00
6705MHz_PoE	Pass	PK	596.48M	25.33	46.00	-20.67	3	Vertical	360	1.00
6705MHz_PoE	Pass	PK	819.58M	26.85	46.00	-19.15	3	Vertical	360	1.00
6705MHz_PoE	Pass	PK	37.76M	20.52	40.00	-19.48	3	Horizontal	0	1.00
6705MHz_PoE	Pass	PK	90.14M	14.82	43.50	-28.68	3	Horizontal	0	1.00
6705MHz_PoE	Pass	PK	198.78M	20.83	43.50	-22.67	3	Horizontal	0	1.00
6705MHz_PoE	Pass	PK	256.98M	17.27	46.00	-28.73	3	Horizontal	0	1.00
6705MHz_PoE	Pass	PK	344.28M	18.65	46.00	-27.35	3	Horizontal	0	1.00
6705MHz_PoE	Pass	PK	776.9M	17.95	46.00	-28.05	3	Horizontal	0	1.00

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6705MHz_PoE

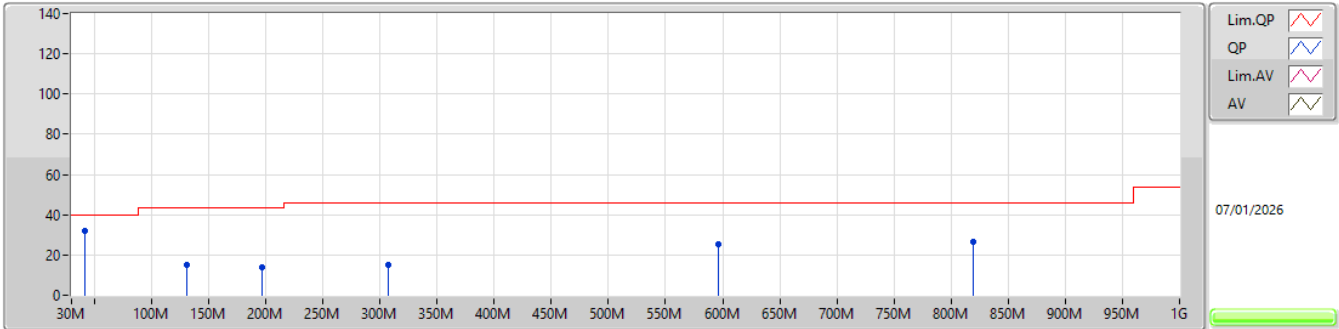

Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBm)	AF (dB)	CL (dB)	PA (dB)
PK	41.64M	31.93	40.00	-8.07	-24.86	3	Vertical	360	1.00	56.79	18.96	0.72	44.54
PK	130.88M	15.15	43.50	-28.35	-25.39	3	Vertical	360	1.00	40.54	17.89	1.25	44.53
PK	196.84M	13.98	43.50	-29.52	-27.83	3	Vertical	360	1.00	41.81	15.02	1.52	44.37
PK	307.42M	14.99	46.00	-31.01	-23.07	3	Vertical	360	1.00	38.06	19.33	1.77	44.17
PK	596.48M	25.33	46.00	-20.67	-15.20	3	Vertical	360	1.00	40.53	26.10	2.50	43.80
PK	819.58M	26.85	46.00	-19.15	-12.43	3	Vertical	360	1.00	39.28	28.47	2.71	43.61

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6705MHz_PoE

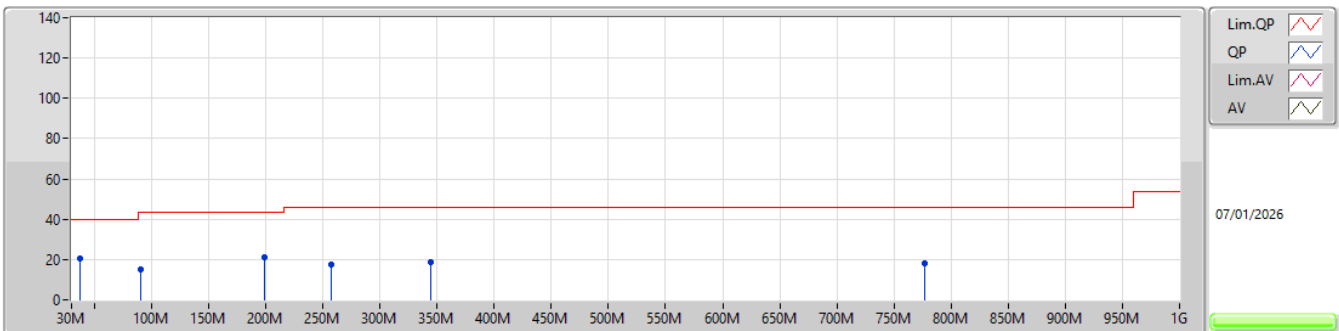

Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBm)	AF (dB)	CL (dB)	PA (dB)
PK	37.76M	20.52	40.00	-19.48	-22.96	3	Horizontal	0	1.00	43.48	20.86	0.68	44.50
PK	90.14M	14.82	43.50	-28.68	-28.33	3	Horizontal	0	1.00	43.15	15.09	1.10	44.52
PK	198.78M	20.83	43.50	-22.67	-27.77	3	Horizontal	0	1.00	48.60	15.06	1.53	44.36
PK	256.98M	17.27	46.00	-28.73	-22.98	3	Horizontal	0	1.00	40.25	19.61	1.69	44.28
PK	344.28M	18.65	46.00	-27.35	-21.86	3	Horizontal	0	1.00	40.51	20.40	1.88	44.14
PK	776.9M	17.95	46.00	-28.05	-12.66	3	Horizontal	0	1.00	30.61	28.18	2.75	43.59

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	11.90224G	42.44	54.00	-11.56	3	Vertical	49	2.62
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	11.92992G	41.66	54.00	-12.34	3	Vertical	47	1.59
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.922G	56.38	68.20	-11.82	3	Horizontal	349	1.00
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	12.68034G	41.36	54.00	-12.64	3	Vertical	339	1.50
802.11be EHT320_Nss1,(MCS0)_2TX	Pass	AV	12.5335G	40.22	54.00	-13.78	3	Vertical	124	1.74
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	13.3903G	45.40	54.00	-8.60	3	Horizontal	332	1.67
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	13.36994G	43.22	54.00	-10.78	3	Horizontal	331	1.50
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	13.25208G	54.08	74.00	-19.92	3	Horizontal	334	1.50
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	13.32988G	42.28	54.00	-11.72	3	Horizontal	333	1.47

Result

Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	AV	5.8101G	46.47	68.20	-21.73	3	Vertical	248	1.10
5955MHz	Pass	AV	5.9541G	92.77	Inf	-Inf	3	Vertical	248	1.10
5955MHz	Pass	PK	5.847G	58.97	88.20	-29.23	3	Vertical	248	1.10
5955MHz	Pass	PK	5.9556G	104.03	Inf	-Inf	3	Vertical	248	1.10
5955MHz	Pass	AV	5.925G	47.40	68.20	-20.80	3	Horizontal	346	1.01
5955MHz	Pass	AV	5.9541G	104.57	Inf	-Inf	3	Horizontal	346	1.01
5955MHz	Pass	PK	5.9247G	59.37	88.20	-28.83	3	Horizontal	346	1.01
5955MHz	Pass	PK	5.9532G	115.27	Inf	-Inf	3	Horizontal	346	1.01
5955MHz	Pass	AV	11.90224G	42.44	54.00	-11.56	3	Vertical	49	2.62
5955MHz	Pass	PK	11.9194G	55.91	74.00	-18.09	3	Vertical	49	2.62
5955MHz	Pass	AV	11.90438G	42.32	54.00	-11.68	3	Horizontal	354	1.60
5955MHz	Pass	PK	11.90874G	54.45	74.00	-19.55	3	Horizontal	354	1.60
6195MHz	Pass	AV	12.38964G	40.11	54.00	-13.89	3	Vertical	238	1.50
6195MHz	Pass	PK	12.38038G	52.07	74.00	-21.93	3	Vertical	238	1.50
6195MHz	Pass	AV	12.3906G	40.95	54.00	-13.05	3	Horizontal	325	1.63
6195MHz	Pass	PK	12.39258G	53.06	74.00	-20.94	3	Horizontal	325	1.63
6415MHz	Pass	AV	12.83334G	45.39	68.20	-22.81	3	Vertical	342	1.65
6415MHz	Pass	PK	12.8309G	57.50	88.20	-30.70	3	Vertical	342	1.65
6415MHz	Pass	AV	12.83516G	43.94	68.20	-24.26	3	Horizontal	327	1.08
6415MHz	Pass	PK	12.8348G	56.62	88.20	-31.58	3	Horizontal	327	1.08
6535MHz	Pass	AV	13.06974G	44.80	68.20	-23.40	3	Vertical	310	1.48
6535MHz	Pass	PK	13.07118G	56.65	88.20	-31.55	3	Vertical	310	1.48
6535MHz	Pass	AV	13.06976G	46.31	68.20	-21.89	3	Horizontal	326	1.65
6535MHz	Pass	PK	13.07008G	57.80	88.20	-30.40	3	Horizontal	326	1.65
6695MHz	Pass	AV	13.39004G	42.42	54.00	-11.58	3	Vertical	304	1.62
6695MHz	Pass	PK	13.38956G	54.54	74.00	-19.46	3	Vertical	304	1.62
6695MHz	Pass	AV	13.3903G	45.40	54.00	-8.60	3	Horizontal	332	1.67
6695MHz	Pass	PK	13.39574G	57.46	74.00	-16.54	3	Horizontal	332	1.67
6855MHz	Pass	AV	13.70982G	46.04	68.20	-22.16	3	Vertical	327	1.34
6855MHz	Pass	PK	13.71306G	57.38	88.20	-30.82	3	Vertical	327	1.34
6855MHz	Pass	AV	13.70958G	44.19	68.20	-24.01	3	Horizontal	327	2.67
6855MHz	Pass	PK	13.70894G	57.44	88.20	-30.76	3	Horizontal	327	2.67
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	AV	5.9245G	47.61	68.20	-20.59	3	Vertical	254	1.02
5965MHz	Pass	AV	5.9659G	89.74	Inf	-Inf	3	Vertical	254	1.02
5965MHz	Pass	PK	5.8426G	59.46	88.20	-28.74	3	Vertical	254	1.02
5965MHz	Pass	PK	5.9659G	101.31	Inf	-Inf	3	Vertical	254	1.02
5965MHz	Pass	AV	5.9236G	55.07	68.20	-13.13	3	Horizontal	349	1.01
5965MHz	Pass	AV	5.9638G	101.04	Inf	-Inf	3	Horizontal	349	1.01
5965MHz	Pass	PK	5.9233G	68.37	88.20	-19.83	3	Horizontal	349	1.01
5965MHz	Pass	PK	5.9632G	112.55	Inf	-Inf	3	Horizontal	349	1.01
5965MHz	Pass	AV	11.92992G	41.66	54.00	-12.34	3	Vertical	47	1.59
5965MHz	Pass	PK	11.92868G	53.09	74.00	-20.91	3	Vertical	47	1.59
5965MHz	Pass	AV	11.92992G	40.69	54.00	-13.31	3	Horizontal	244	1.55
5965MHz	Pass	PK	11.9263G	52.44	74.00	-21.56	3	Horizontal	244	1.55
6205MHz	Pass	AV	12.41822G	40.19	54.00	-13.81	3	Vertical	338	1.50
6205MHz	Pass	PK	12.41926G	52.19	74.00	-21.81	3	Vertical	338	1.50
6205MHz	Pass	AV	12.4097G	40.40	54.00	-13.60	3	Horizontal	347	1.50
6205MHz	Pass	PK	12.40876G	53.37	74.00	-20.63	3	Horizontal	347	1.50
6405MHz	Pass	AV	12.81198G	42.35	68.20	-25.85	3	Vertical	337	2.58
6405MHz	Pass	PK	12.80898G	54.75	88.20	-33.45	3	Vertical	337	2.58
6405MHz	Pass	AV	12.8G	41.36	68.20	-26.84	3	Horizontal	86	2.41
6405MHz	Pass	PK	12.809G	53.76	88.20	-34.44	3	Horizontal	86	2.41
6565MHz	Pass	AV	13.12998G	43.33	68.20	-24.87	3	Vertical	309	1.50
6565MHz	Pass	PK	13.12856G	55.62	88.20	-32.58	3	Vertical	309	1.50
6565MHz	Pass	AV	13.12984G	44.77	68.20	-23.43	3	Horizontal	280	1.69
6565MHz	Pass	PK	13.12854G	56.75	88.20	-31.45	3	Horizontal	280	1.69
6685MHz	Pass	AV	13.36292G	41.92	54.00	-12.08	3	Vertical	330	2.59
6685MHz	Pass	PK	13.3675G	53.84	74.00	-20.16	3	Vertical	330	2.59
6685MHz	Pass	AV	13.36994G	43.22	54.00	-10.78	3	Horizontal	331	1.50


Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6685MHz	Pass	PK	13.37212G	55.43	74.00	-18.57	3	Horizontal	331	1.50
6845MHz	Pass	AV	13.68994G	43.45	68.20	-24.75	3	Vertical	330	1.43
6845MHz	Pass	PK	13.6896G	55.01	88.20	-33.19	3	Vertical	330	1.43
6845MHz	Pass	AV	13.6899G	43.30	68.20	-24.90	3	Horizontal	301	1.62
6845MHz	Pass	PK	13.69314G	53.90	88.20	-34.30	3	Horizontal	301	1.62
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	AV	5.9225G	48.39	68.20	-19.81	3	Vertical	247	1.00
5985MHz	Pass	AV	5.986G	86.21	Inf	-Inf	3	Vertical	247	1.00
5985MHz	Pass	PK	5.9235G	60.28	88.20	-27.92	3	Vertical	247	1.00
5985MHz	Pass	PK	5.9835G	98.34	Inf	-Inf	3	Vertical	247	1.00
5985MHz	Pass	AV	5.922G	56.38	68.20	-11.82	3	Horizontal	349	1.00
5985MHz	Pass	AV	5.9835G	98.46	Inf	-Inf	3	Horizontal	349	1.00
5985MHz	Pass	PK	5.9215G	69.44	88.20	-18.76	3	Horizontal	349	1.00
5985MHz	Pass	PK	5.9815G	109.93	Inf	-Inf	3	Horizontal	349	1.00
5985MHz	Pass	AV	11.96994G	41.33	54.00	-12.67	3	Vertical	49	1.60
5985MHz	Pass	PK	11.9703G	52.52	74.00	-21.48	3	Vertical	49	1.60
5985MHz	Pass	AV	11.96984G	40.75	54.00	-13.25	3	Horizontal	38	2.36
5985MHz	Pass	PK	11.97458G	53.15	74.00	-20.85	3	Horizontal	38	2.36
6225MHz	Pass	AV	12.44036G	40.02	54.00	-13.98	3	Vertical	98	1.45
6225MHz	Pass	PK	12.44064G	52.90	74.00	-21.10	3	Vertical	98	1.45
6225MHz	Pass	AV	12.44958G	40.36	54.00	-13.64	3	Horizontal	328	1.53
6225MHz	Pass	PK	12.4464G	52.33	74.00	-21.67	3	Horizontal	328	1.53
6385MHz	Pass	AV	12.7703G	41.17	68.20	-27.03	3	Vertical	57	1.50
6385MHz	Pass	PK	12.76956G	54.89	88.20	-33.31	3	Vertical	57	1.50
6385MHz	Pass	AV	12.77236G	41.13	68.20	-27.07	3	Horizontal	181	1.50
6385MHz	Pass	PK	12.77498G	53.58	88.20	-34.62	3	Horizontal	181	1.50
6625MHz	Pass	AV	13.24972G	41.78	68.20	-26.42	3	Vertical	289	1.49
6625MHz	Pass	PK	13.24896G	54.06	88.20	-34.14	3	Vertical	289	1.49
6625MHz	Pass	AV	13.24992G	41.96	68.20	-26.24	3	Horizontal	334	1.50
6625MHz	Pass	PK	13.25208G	54.08	74.00	-19.92	3	Horizontal	334	1.50
6705MHz	Pass	AV	13.40984G	40.80	68.20	-27.40	3	Vertical	287	1.50
6705MHz	Pass	PK	13.40742G	54.42	88.20	-33.78	3	Vertical	287	1.50
6705MHz	Pass	AV	13.40982G	42.33	68.20	-25.87	3	Horizontal	332	1.44
6705MHz	Pass	PK	13.40764G	54.02	88.20	-34.18	3	Horizontal	332	1.44
6785MHz	Pass	AV	13.57032G	42.31	68.20	-25.89	3	Vertical	306	1.50
6785MHz	Pass	PK	13.56962G	54.79	88.20	-33.41	3	Vertical	306	1.50
6785MHz	Pass	AV	13.56988G	42.48	68.20	-25.72	3	Horizontal	325	1.65
6785MHz	Pass	PK	13.5621G	54.56	88.20	-33.64	3	Horizontal	325	1.65
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.9225G	47.15	68.20	-21.05	3	Vertical	251	1.00
6025MHz	Pass	AV	6.0265G	83.22	Inf	-Inf	3	Vertical	251	1.00
6025MHz	Pass	PK	5.8175G	60.03	88.20	-28.17	3	Vertical	251	1.00
6025MHz	Pass	PK	6.0275G	93.92	Inf	-Inf	3	Vertical	251	1.00
6025MHz	Pass	AV	5.922G	51.96	68.20	-16.24	3	Horizontal	347	1.00
6025MHz	Pass	AV	6.023G	95.55	Inf	-Inf	3	Horizontal	347	1.00
6025MHz	Pass	PK	5.9215G	63.14	88.20	-25.06	3	Horizontal	347	1.00
6025MHz	Pass	PK	6.0455G	106.57	Inf	-Inf	3	Horizontal	347	1.00
6025MHz	Pass	AV	12.04998G	41.13	54.00	-12.87	3	Vertical	290	1.40
6025MHz	Pass	PK	12.04272G	53.06	74.00	-20.94	3	Vertical	290	1.40
6025MHz	Pass	AV	12.04022G	40.27	54.00	-13.73	3	Horizontal	216	1.50
6025MHz	Pass	PK	12.04832G	53.00	74.00	-21.00	3	Horizontal	216	1.50
6185MHz	Pass	AV	12.36042G	39.87	54.00	-14.13	3	Vertical	360	1.50
6185MHz	Pass	PK	12.36382G	52.42	74.00	-21.58	3	Vertical	360	1.50
6185MHz	Pass	AV	12.36976G	39.82	54.00	-14.18	3	Horizontal	93	2.89
6185MHz	Pass	PK	12.36858G	52.20	74.00	-21.80	3	Horizontal	93	2.89
6345MHz	Pass	AV	12.68034G	41.36	54.00	-12.64	3	Vertical	339	1.50
6345MHz	Pass	PK	12.69682G	53.72	74.00	-20.28	3	Vertical	339	1.50
6345MHz	Pass	AV	12.68406G	41.24	54.00	-12.76	3	Horizontal	121	1.50
6345MHz	Pass	PK	12.68586G	53.43	74.00	-20.57	3	Horizontal	121	1.50
6665MHz	Pass	AV	13.32984G	41.39	54.00	-12.61	3	Vertical	282	1.50
6665MHz	Pass	PK	13.33954G	53.44	74.00	-20.56	3	Vertical	282	1.50
6665MHz	Pass	AV	13.32988G	42.28	54.00	-11.72	3	Horizontal	333	1.47



Mode	Result	Type	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6665MHz	Pass	PK	13.32242G	54.99	74.00	-19.01	3	Horizontal	333	1.47
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.799G	46.79	68.20	-21.41	3	Vertical	279	1.01
6105MHz	Pass	AV	6.122G	82.47	Inf	-Inf	3	Vertical	279	1.01
6105MHz	Pass	PK	5.925G	59.39	88.20	-28.81	3	Vertical	279	1.01
6105MHz	Pass	PK	6.121G	93.77	Inf	-Inf	3	Vertical	279	1.01
6105MHz	Pass	AV	5.924G	49.92	68.20	-18.28	3	Horizontal	347	1.01
6105MHz	Pass	AV	6.103G	93.19	Inf	-Inf	3	Horizontal	347	1.01
6105MHz	Pass	PK	5.922G	61.56	88.20	-26.64	3	Horizontal	347	1.01
6105MHz	Pass	PK	6.102G	103.52	Inf	-Inf	3	Horizontal	347	1.01
6105MHz	Pass	AV	12.2025G	40.13	54.00	-13.87	3	Vertical	259	2.95
6105MHz	Pass	PK	12.20314G	52.90	74.00	-21.10	3	Vertical	259	2.95
6105MHz	Pass	AV	12.20006G	40.16	54.00	-13.84	3	Horizontal	236	1.50
6105MHz	Pass	PK	12.204G	52.30	74.00	-21.70	3	Horizontal	236	1.50
6265MHz	Pass	AV	12.5335G	40.22	54.00	-13.78	3	Vertical	124	1.74
6265MHz	Pass	PK	12.53538G	53.26	74.00	-20.74	3	Vertical	124	1.74
6265MHz	Pass	AV	12.53538G	40.21	54.00	-13.79	3	Horizontal	156	1.04
6265MHz	Pass	PK	12.52506G	53.10	74.00	-20.90	3	Horizontal	156	1.04


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

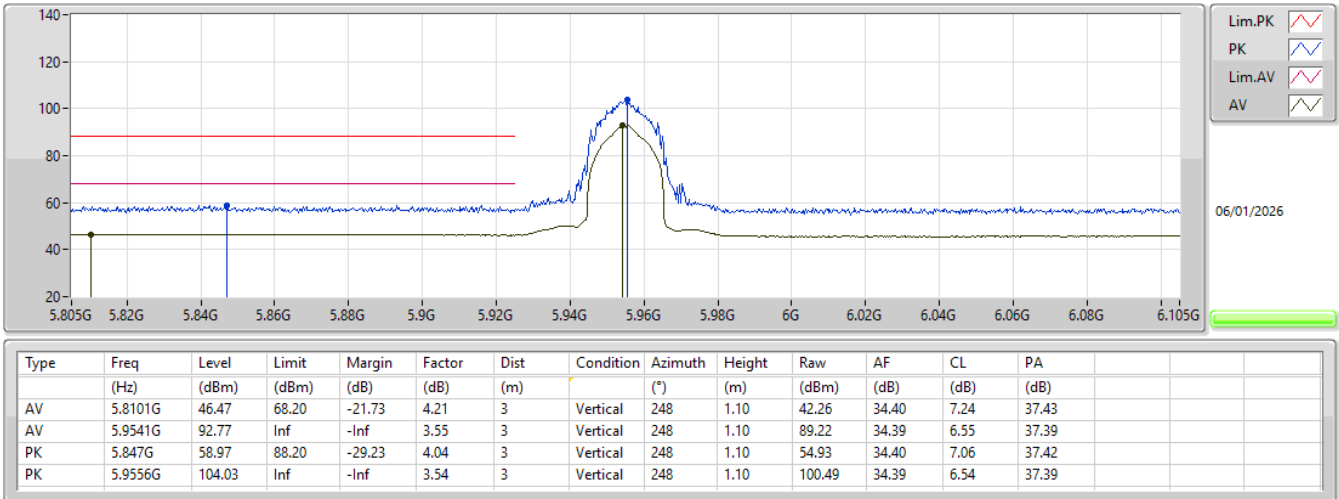


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

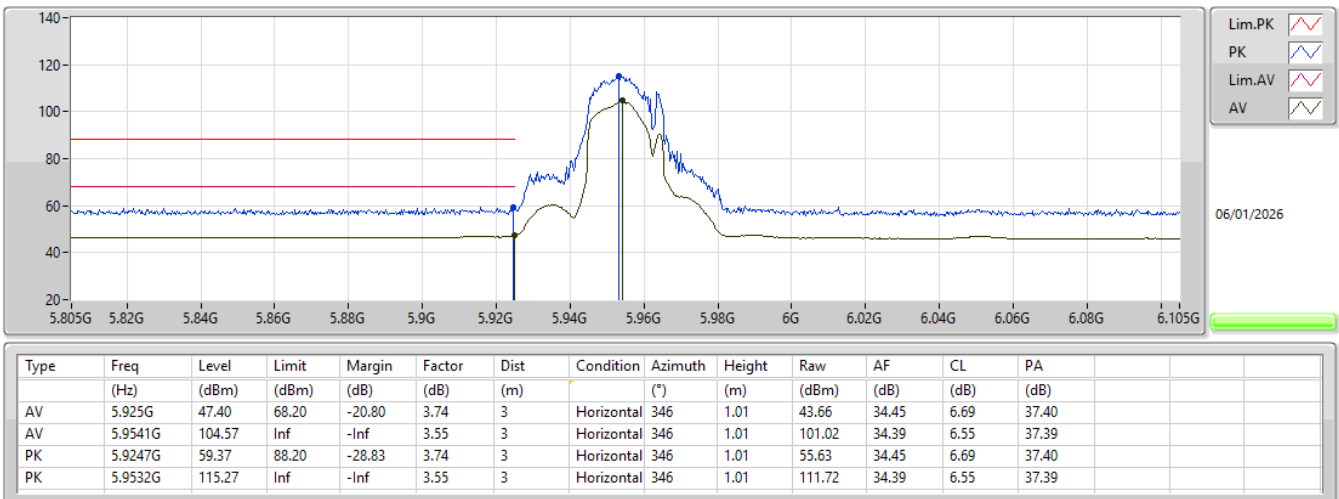


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

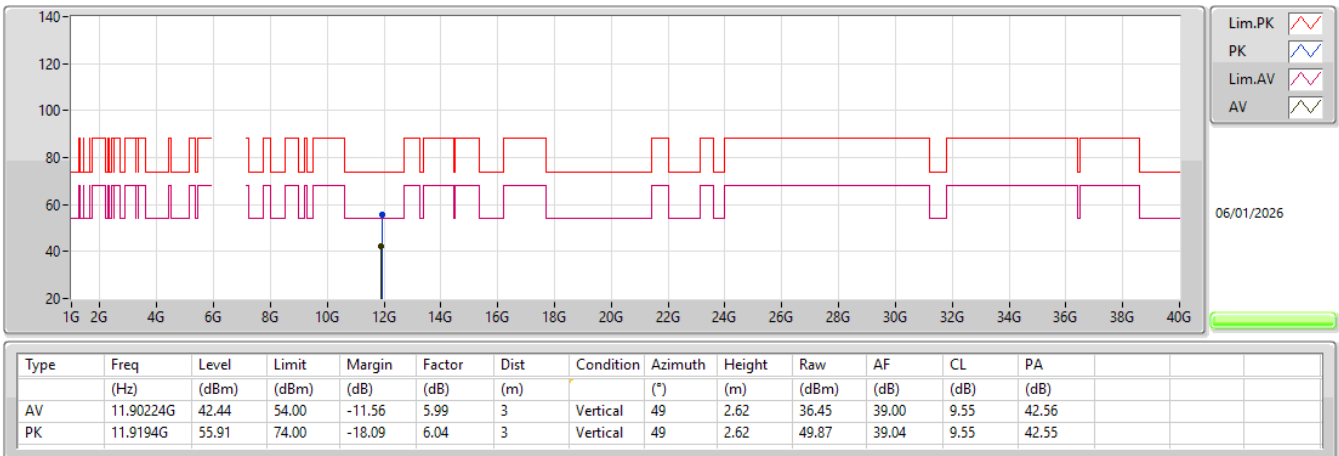


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

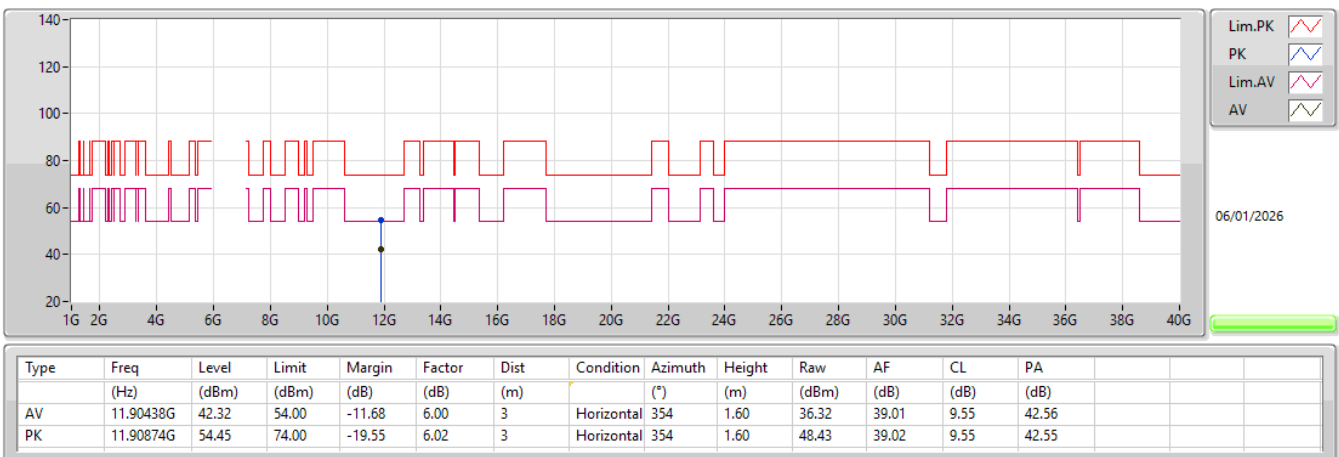


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

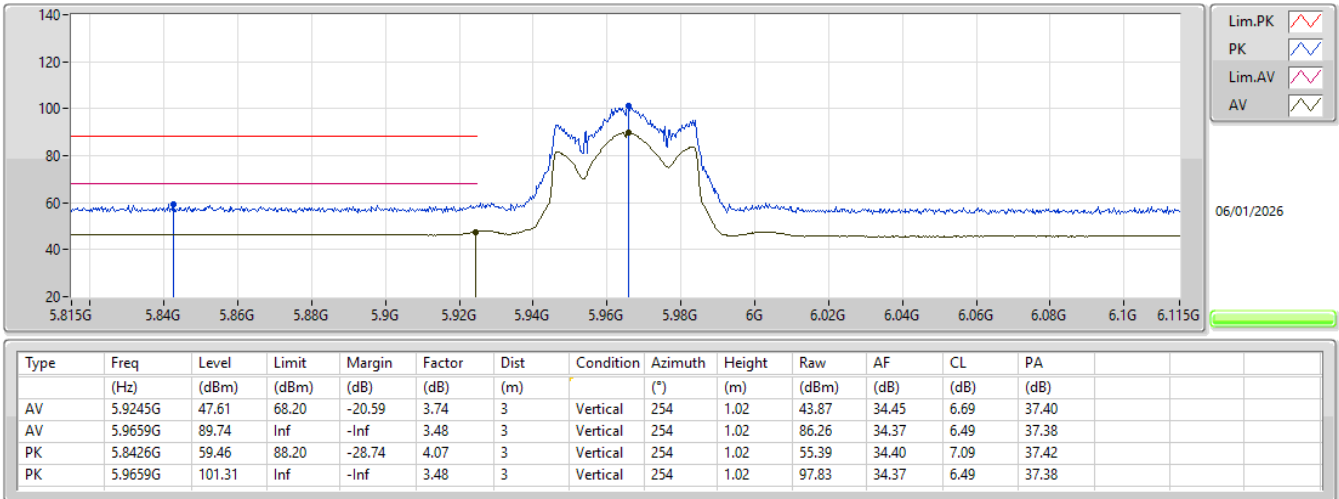


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

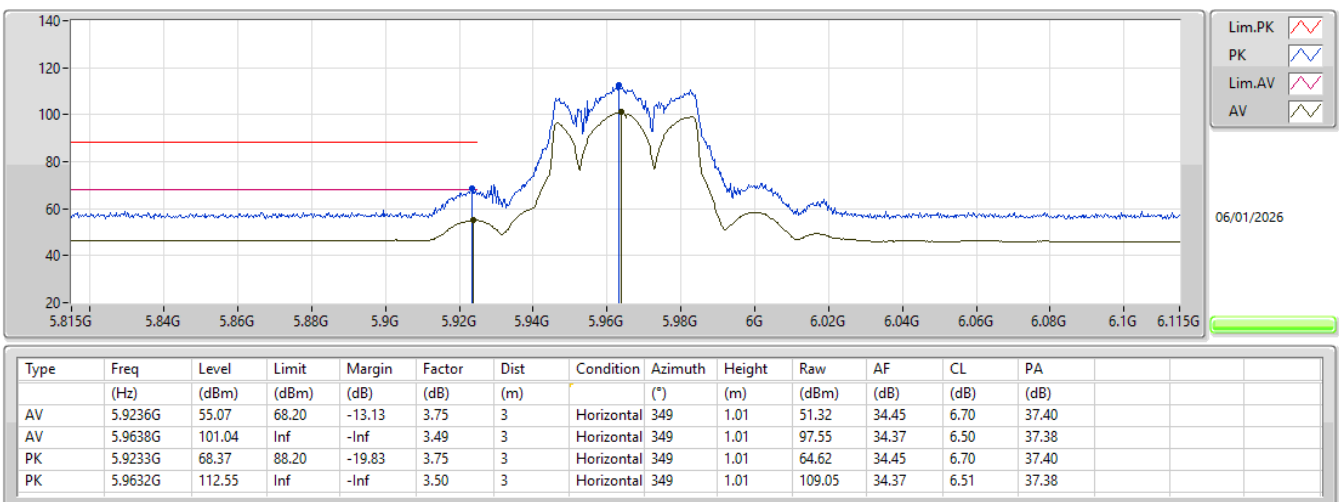


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

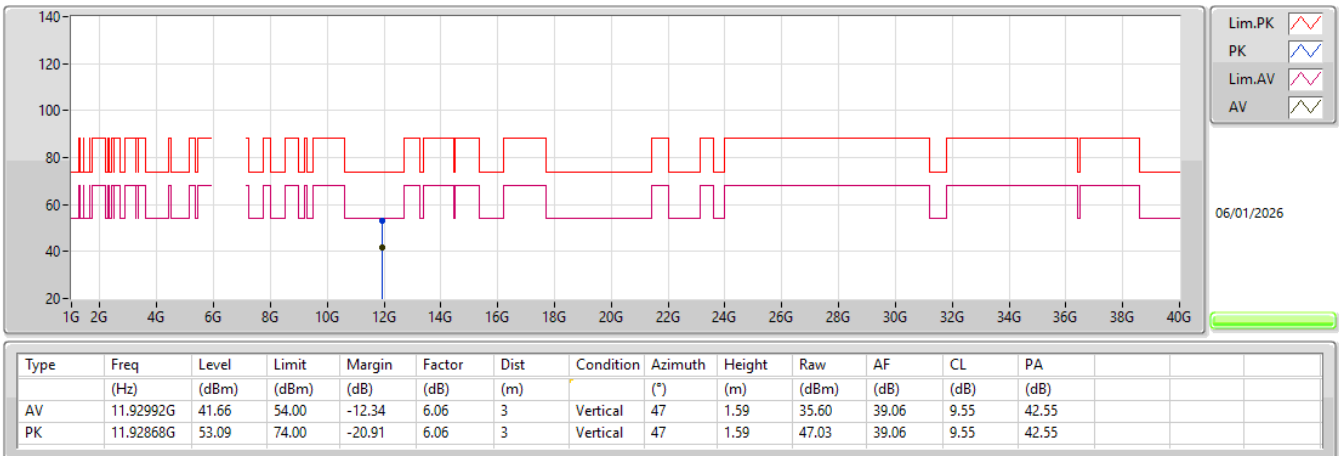


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

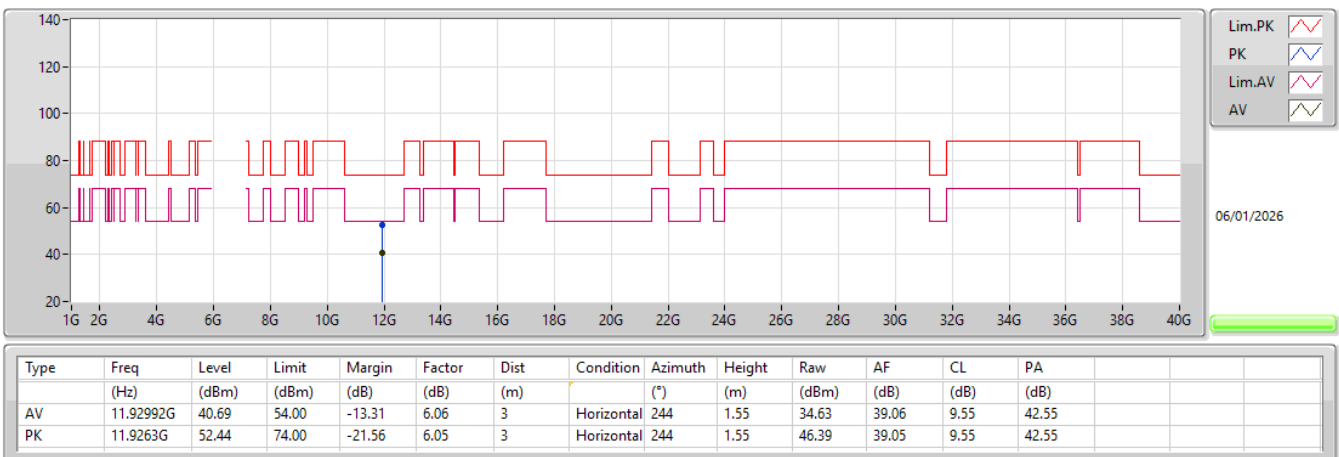


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

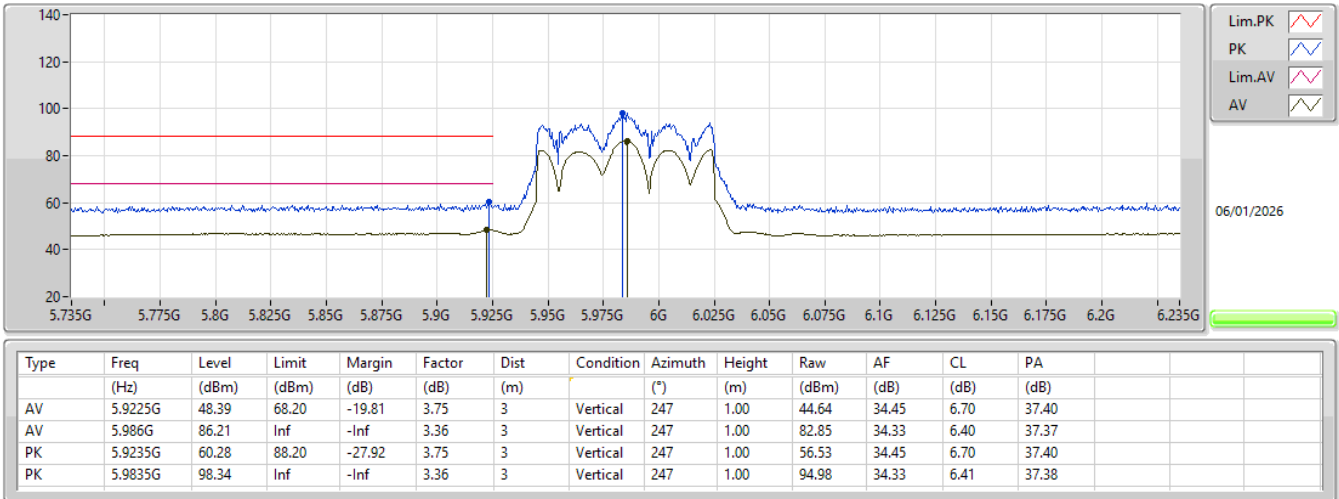


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

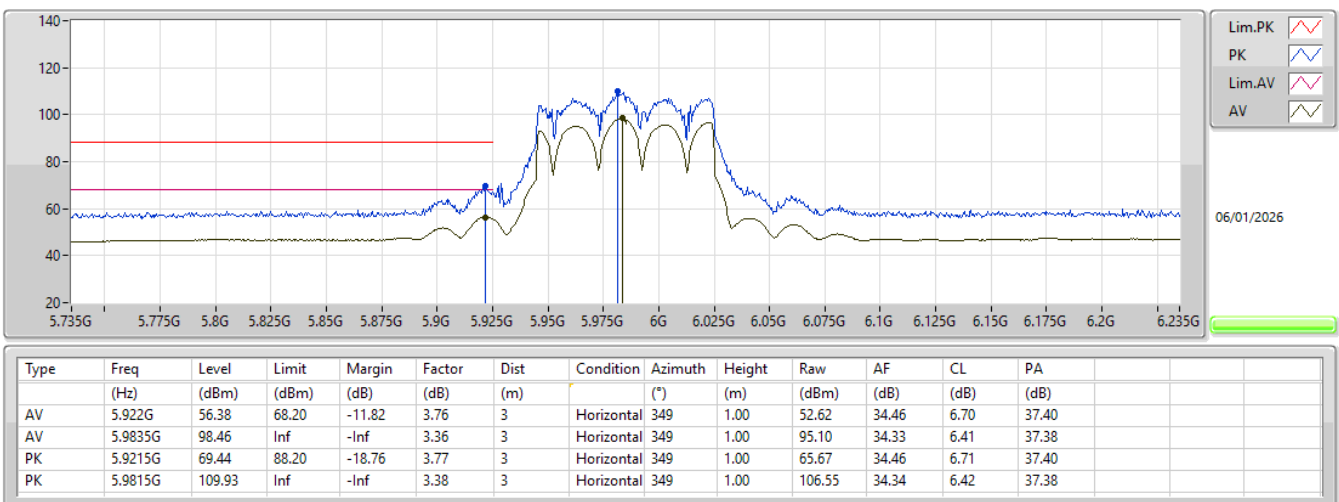


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

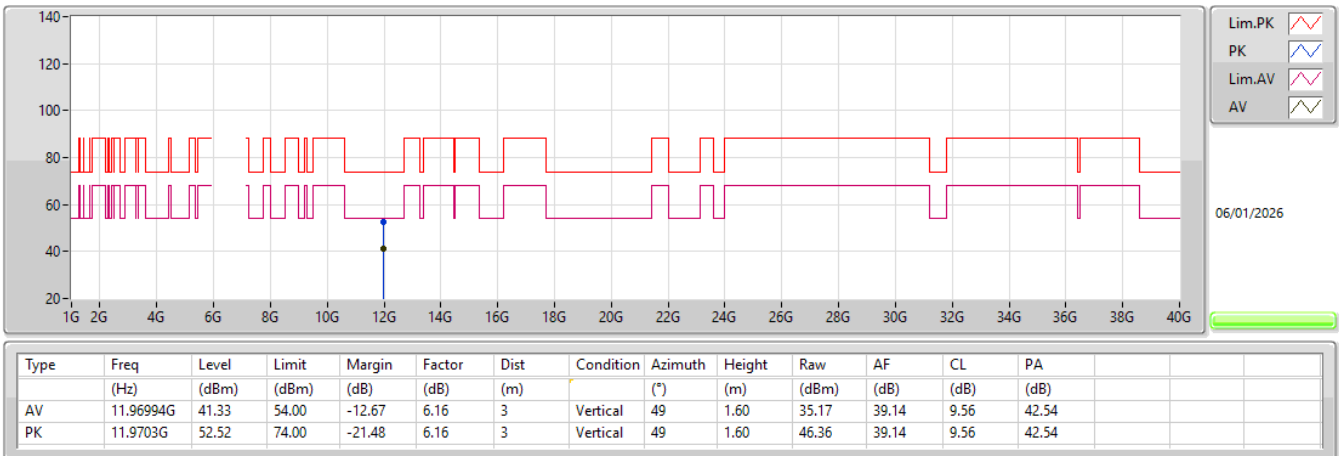


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

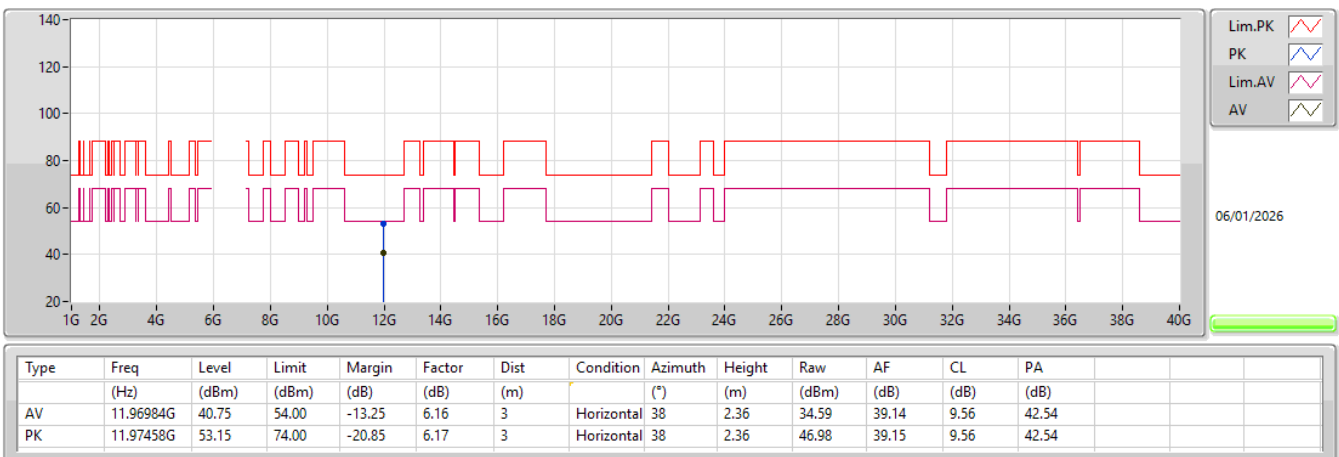


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

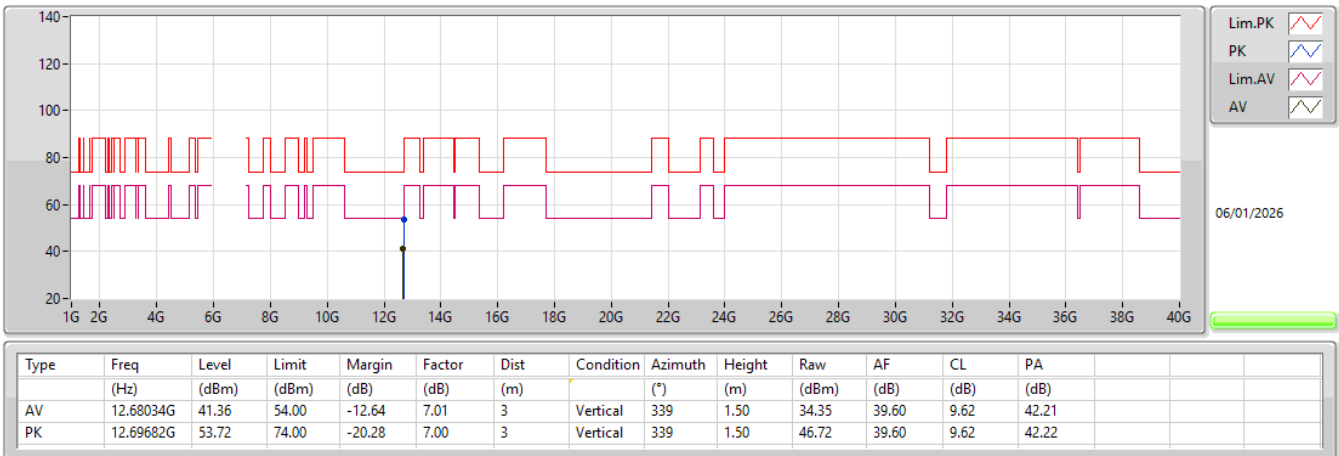


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

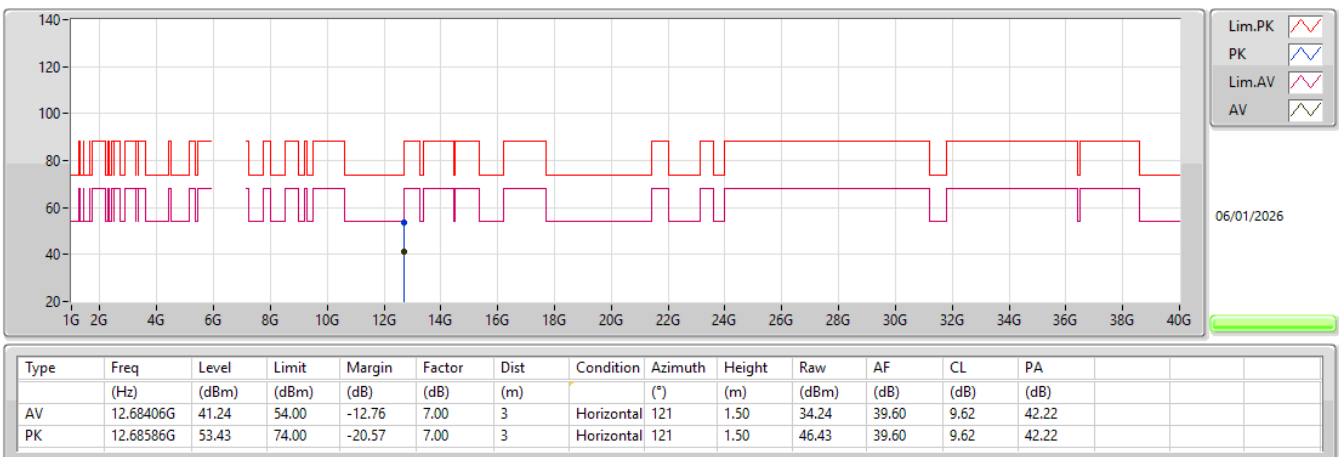


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

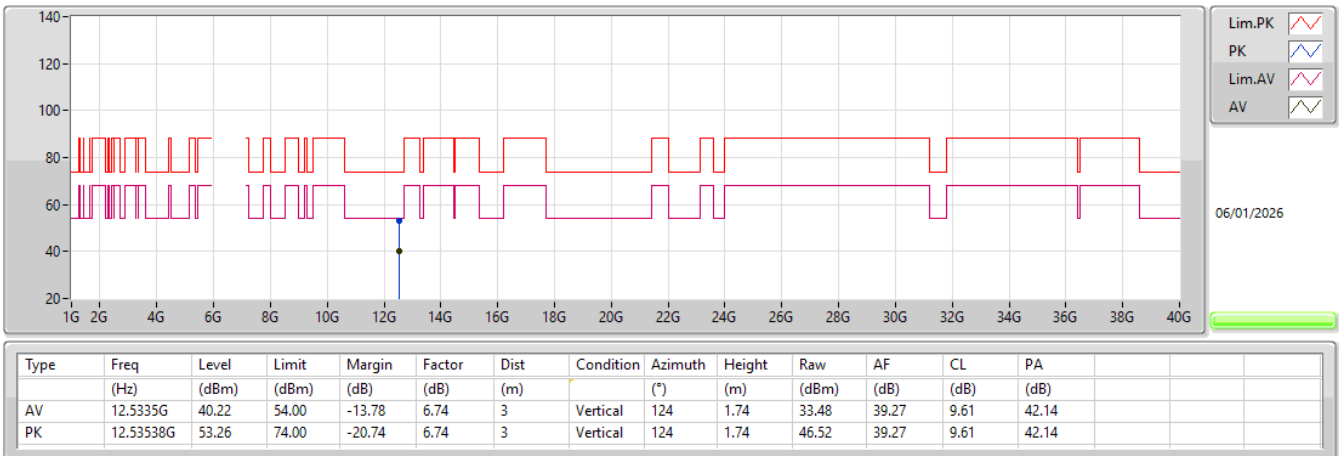


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

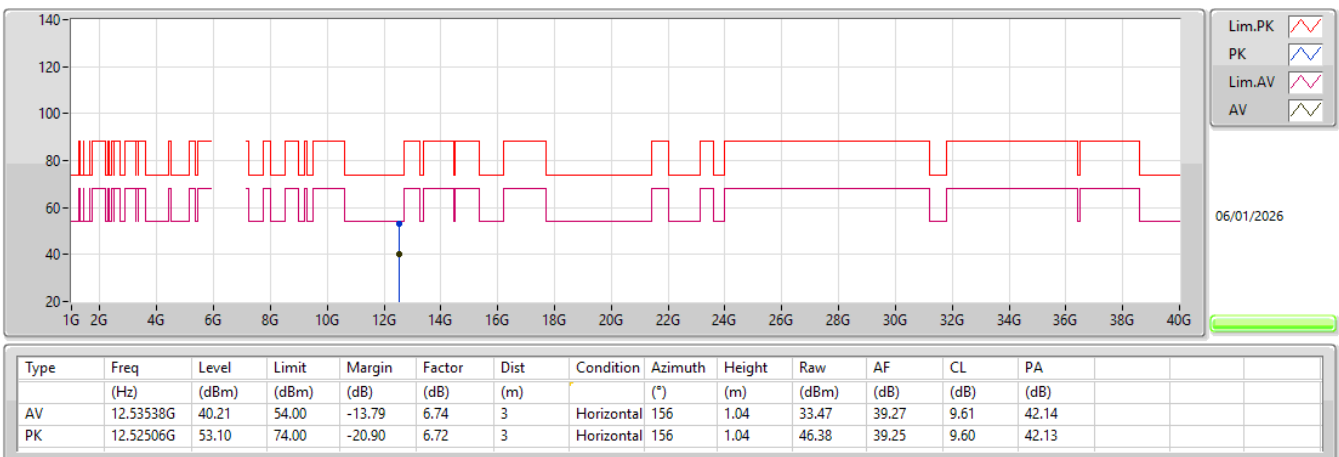


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

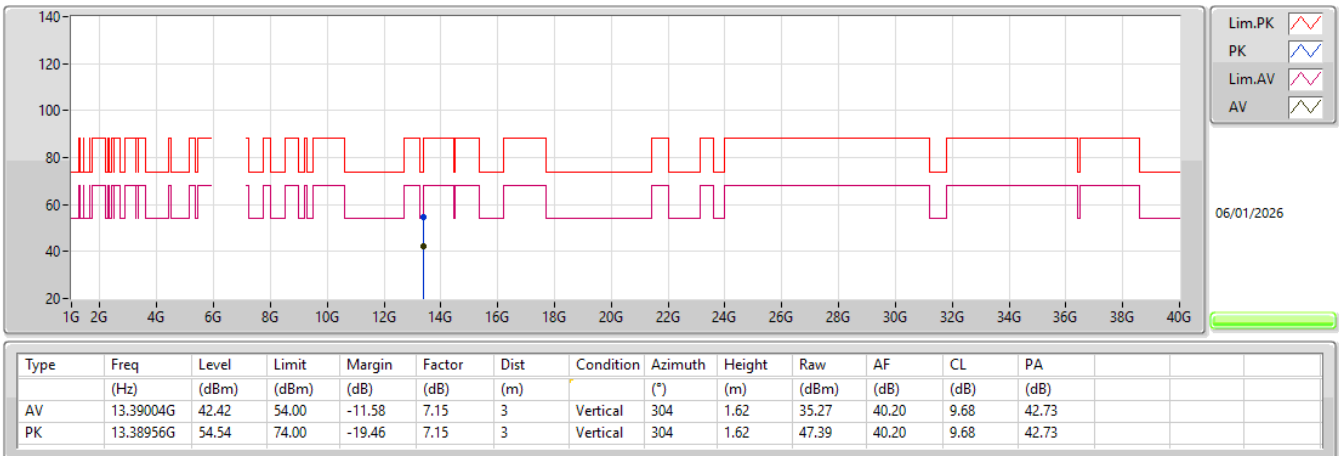


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

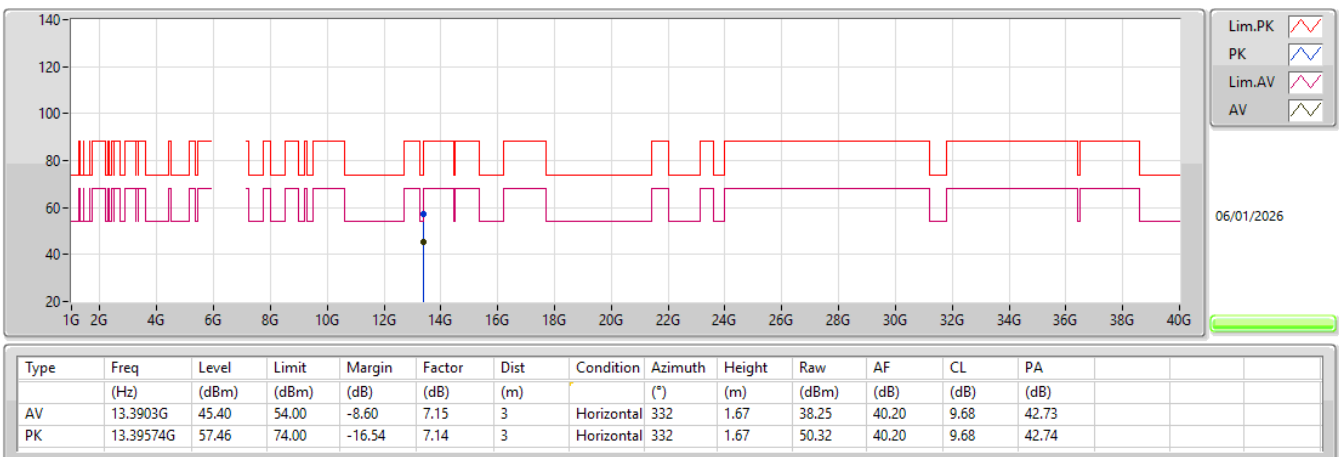


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

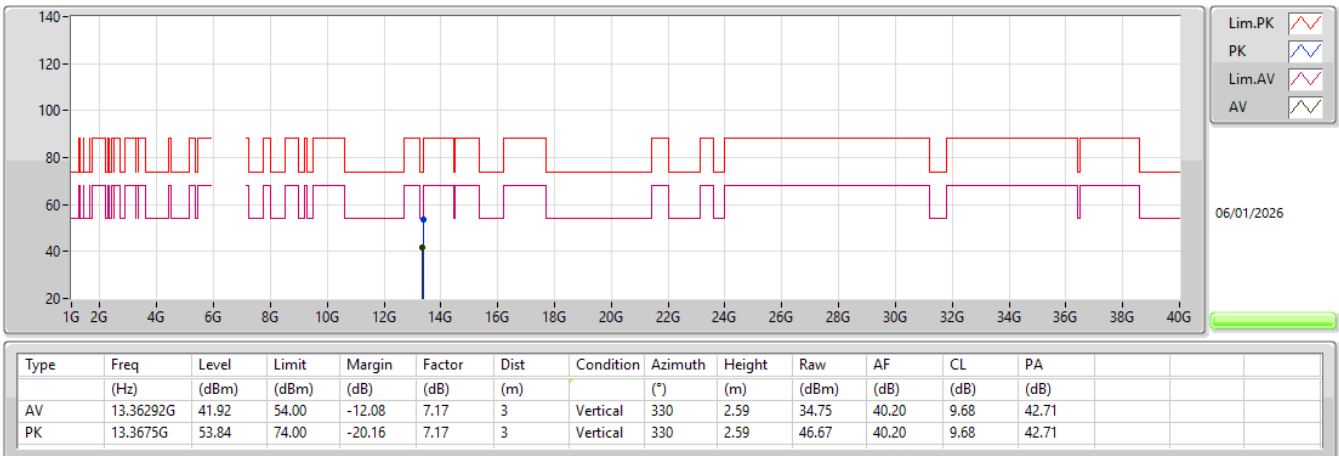


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

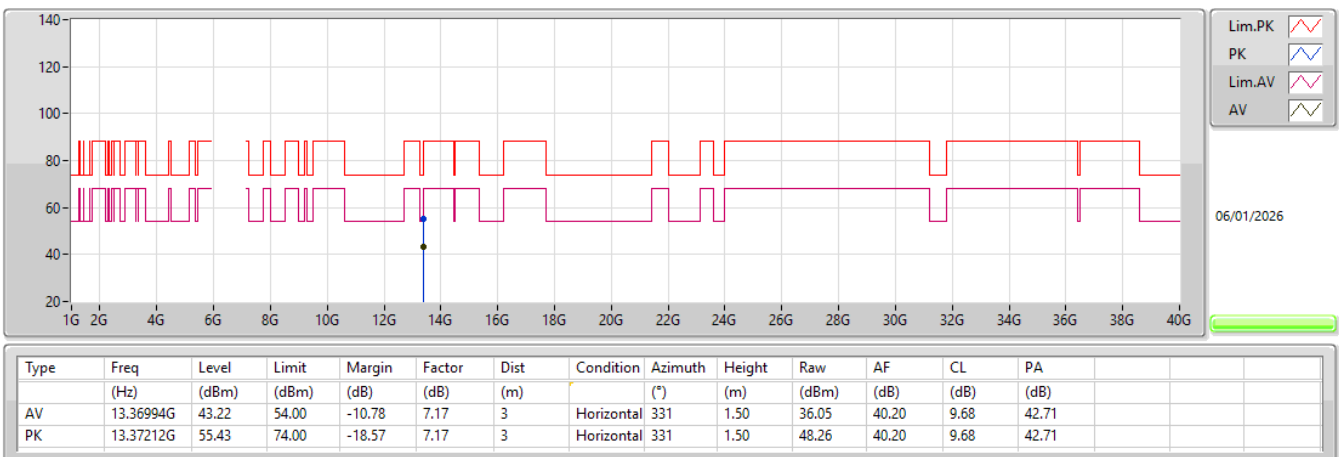


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

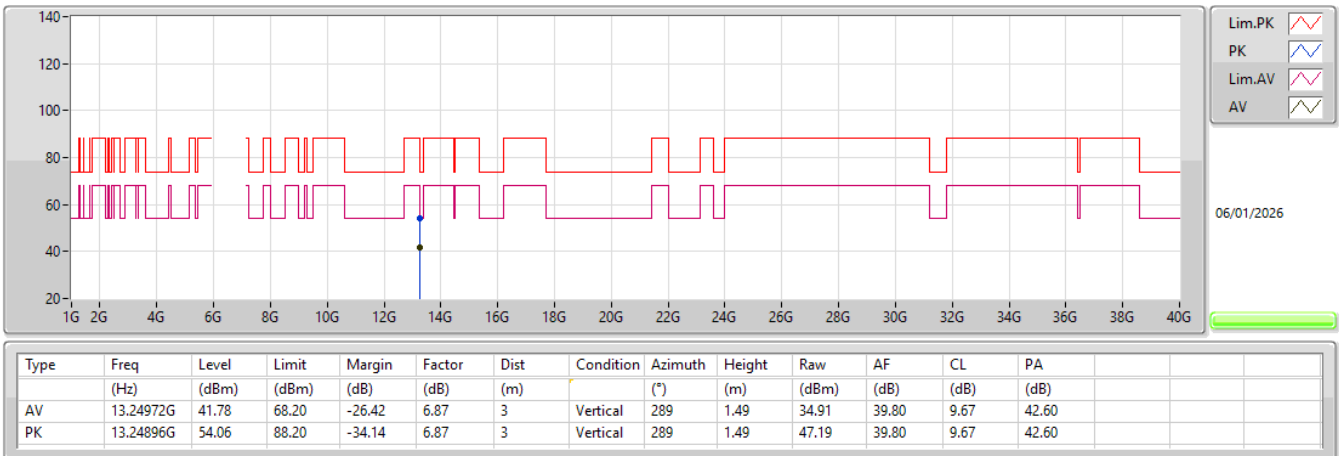


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

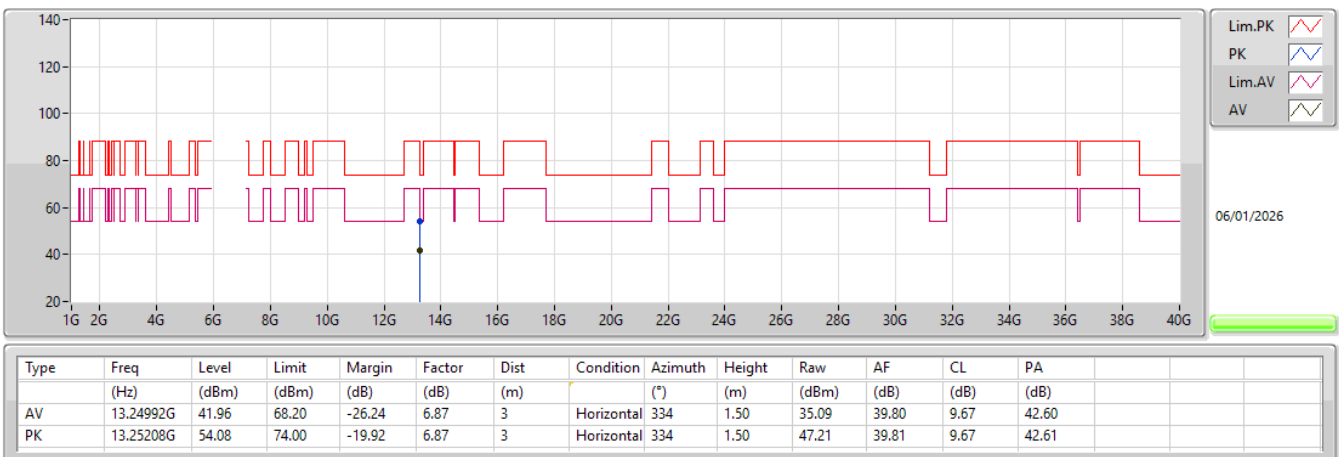


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

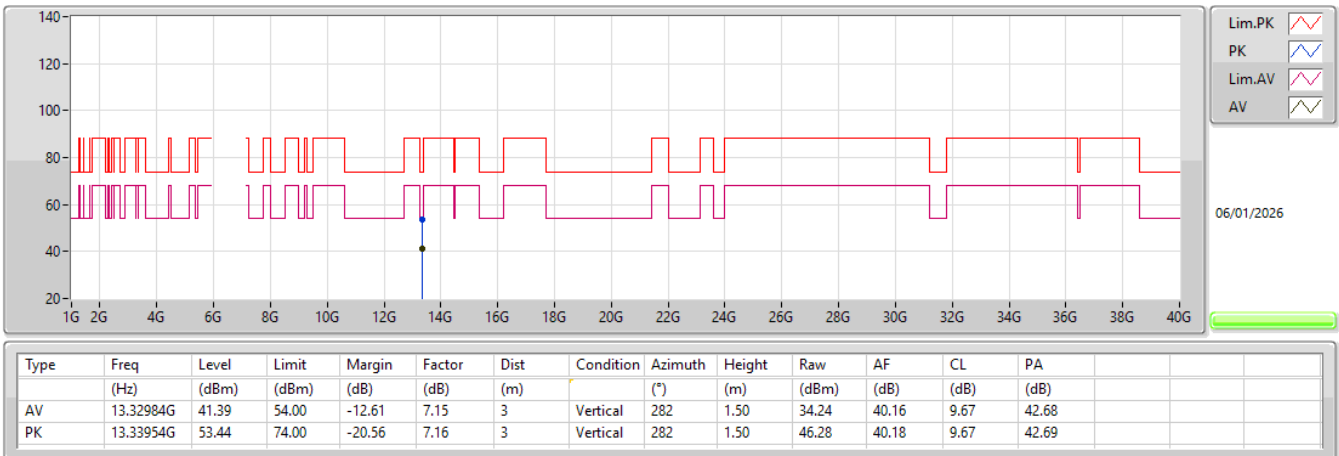

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

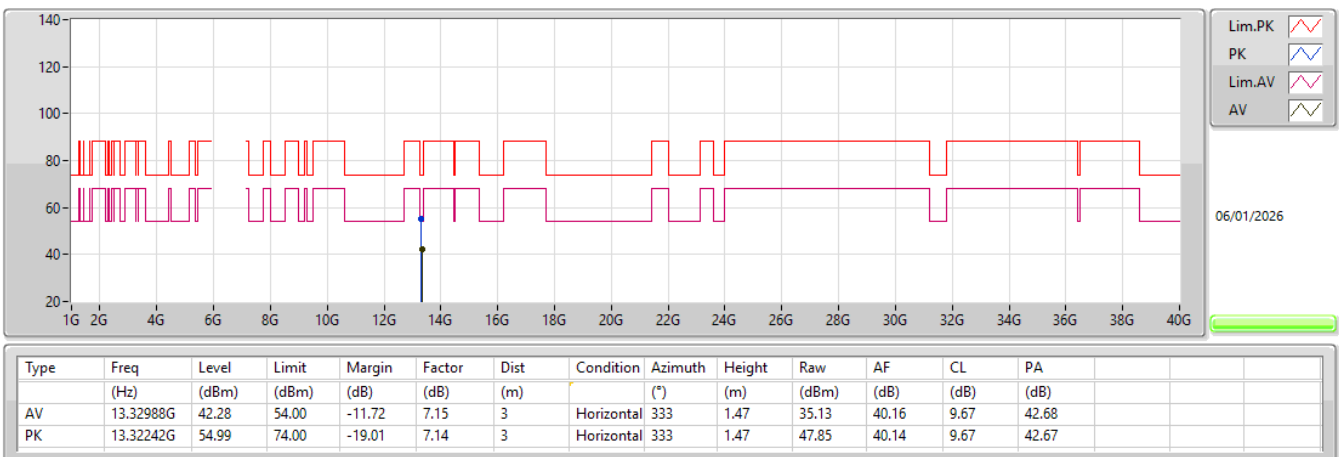

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	Pass	AV	5.924G	57.81	68.20	-10.39	3	Horizontal	347	2.87
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	Pass	AV	11.96984G	40.10	54.00	-13.90	3	Vertical	291	1.84
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX	Pass	AV	12.13128G	39.45	54.00	-14.55	3	Vertical	305	2.93


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-	-	-
5985MHz_TX	Pass	AV	5.92G	48.84	68.20	-19.36	3	Vertical	123	2.96
5985MHz_TX	Pass	AV	6.023G	89.00	Inf	-Inf	3	Vertical	123	2.96
5985MHz_TX	Pass	PK	5.918G	61.91	88.20	-26.29	3	Vertical	123	2.96
5985MHz_TX	Pass	PK	6.021G	100.90	Inf	-Inf	3	Vertical	123	2.96
5985MHz_TX	Pass	AV	5.924G	57.81	68.20	-10.39	3	Horizontal	347	2.87
5985MHz_TX	Pass	AV	6.021G	99.40	Inf	-Inf	3	Horizontal	347	2.87
5985MHz_TX	Pass	PK	5.919G	74.13	88.20	-14.07	3	Horizontal	347	2.87
5985MHz_TX	Pass	PK	6.019G	111.39	Inf	-Inf	3	Horizontal	347	2.87
5985MHz_TX	Pass	AV	11.97G	40.43	54.00	-13.57	3	Vertical	46	2.67
5985MHz_TX	Pass	PK	11.93976G	50.54	74.00	-23.46	3	Vertical	46	2.67
5985MHz_TX	Pass	AV	11.97G	39.61	54.00	-14.39	3	Horizontal	306	1.50
5985MHz_TX	Pass	PK	11.97888G	50.62	74.00	-23.38	3	Horizontal	306	1.50
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-
5985MHz_TX	Pass	AV	5.9G	46.66	68.20	-21.54	3	Vertical	122	2.96
5985MHz_TX	Pass	AV	6.023G	89.41	Inf	-Inf	3	Vertical	122	2.96
5985MHz_TX	Pass	PK	5.905G	58.63	88.20	-29.57	3	Vertical	122	2.96
5985MHz_TX	Pass	PK	6.021G	100.41	Inf	-Inf	3	Vertical	122	2.96
5985MHz_TX	Pass	AV	5.9G	53.52	68.20	-14.68	3	Horizontal	349	2.81
5985MHz_TX	Pass	AV	6.02G	99.69	Inf	-Inf	3	Horizontal	349	2.81
5985MHz_TX	Pass	PK	5.906G	69.96	88.20	-18.24	3	Horizontal	349	2.81
5985MHz_TX	Pass	PK	6.02G	110.76	Inf	-Inf	3	Horizontal	349	2.81
5985MHz_TX	Pass	AV	11.96976G	40.24	54.00	-13.76	3	Vertical	46	2.62
5985MHz_TX	Pass	PK	11.98968G	51.15	74.00	-22.85	3	Vertical	46	2.62
5985MHz_TX	Pass	AV	11.96976G	39.62	54.00	-14.38	3	Horizontal	303	1.50
5985MHz_TX	Pass	PK	11.94048G	50.73	74.00	-23.27	3	Horizontal	303	1.50
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz_TX	Pass	AV	5.925G	46.69	68.20	-21.51	3	Vertical	269	2.67
6025MHz_TX	Pass	AV	6.096G	88.59	Inf	-Inf	3	Vertical	269	2.67
6025MHz_TX	Pass	PK	5.924G	58.33	88.20	-29.87	3	Vertical	269	2.67
6025MHz_TX	Pass	PK	6.091G	99.84	Inf	-Inf	3	Vertical	269	2.67
6025MHz_TX	Pass	AV	5.925G	52.14	68.20	-16.06	3	Horizontal	347	2.87
6025MHz_TX	Pass	AV	6.088G	95.39	Inf	-Inf	3	Horizontal	347	2.87
6025MHz_TX	Pass	PK	5.899G	66.98	88.20	-21.22	3	Horizontal	347	2.87
6025MHz_TX	Pass	PK	6.088G	107.55	Inf	-Inf	3	Horizontal	347	2.87
6025MHz_TX	Pass	AV	11.96984G	40.10	54.00	-13.90	3	Vertical	291	1.84
6025MHz_TX	Pass	PK	12.08744G	50.01	74.00	-23.99	3	Vertical	291	1.84
6025MHz_TX	Pass	AV	11.96984G	39.78	54.00	-14.22	3	Horizontal	304	1.31
6025MHz_TX	Pass	PK	12.00296G	50.36	74.00	-23.64	3	Horizontal	304	1.31
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz_TX	Pass	AV	5.916G	46.01	68.20	-22.19	3	Vertical	260	2.74
6025MHz_TX	Pass	AV	6.089G	88.21	Inf	-Inf	3	Vertical	260	2.74
6025MHz_TX	Pass	PK	5.909G	62.27	88.20	-25.93	3	Vertical	260	2.74
6025MHz_TX	Pass	PK	6.095G	99.94	Inf	-Inf	3	Vertical	260	2.74
6025MHz_TX	Pass	AV	5.923G	52.29	68.20	-15.91	3	Horizontal	347	2.88
6025MHz_TX	Pass	AV	6.089G	95.79	Inf	-Inf	3	Horizontal	347	2.88
6025MHz_TX	Pass	PK	5.92G	71.56	88.20	-16.64	3	Horizontal	347	2.88
6025MHz_TX	Pass	PK	6.029G	106.92	Inf	-Inf	3	Horizontal	347	2.88
6025MHz_TX	Pass	AV	11.96984G	40.00	54.00	-14.00	3	Vertical	353	1.41
6025MHz_TX	Pass	PK	12.15944G	49.87	74.00	-24.13	3	Vertical	353	1.41
6025MHz_TX	Pass	AV	11.96984G	39.54	54.00	-14.46	3	Horizontal	307	1.50
6025MHz_TX	Pass	PK	11.97656G	50.63	74.00	-23.37	3	Horizontal	307	1.50
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz_TX	Pass	AV	5.82G	45.71	68.20	-22.49	3	Vertical	270	2.67
6025MHz_TX	Pass	AV	6.094G	88.86	Inf	-Inf	3	Vertical	270	2.67
6025MHz_TX	Pass	PK	5.888G	57.71	88.20	-30.49	3	Vertical	270	2.67
6025MHz_TX	Pass	PK	6.092G	100.32	Inf	-Inf	3	Vertical	270	2.67
6025MHz_TX	Pass	AV	5.925G	49.27	68.20	-18.93	3	Horizontal	346	2.81
6025MHz_TX	Pass	AV	6.069G	95.60	Inf	-Inf	3	Horizontal	346	2.81
6025MHz_TX	Pass	PK	5.921G	65.05	88.20	-23.15	3	Horizontal	346	2.81
6025MHz_TX	Pass	PK	6.073G	107.19	Inf	-Inf	3	Horizontal	346	2.81

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6025MHz_TX	Pass	AV	11.96984G	39.79	54.00	-14.21	3	Vertical	354	1.50
6025MHz_TX	Pass	PK	11.99816G	50.72	74.00	-23.28	3	Vertical	354	1.50
6025MHz_TX	Pass	AV	11.96984G	39.86	54.00	-14.14	3	Horizontal	306	1.50
6025MHz_TX	Pass	PK	12.11384G	50.84	74.00	-23.16	3	Horizontal	306	1.50
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz_TX	Pass	AV	5.923G	46.83	68.20	-21.37	3	Vertical	233	2.95
6105MHz_TX	Pass	AV	5.967G	82.07	Inf	-Inf	3	Vertical	233	2.95
6105MHz_TX	Pass	PK	5.915G	59.50	88.20	-28.70	3	Vertical	233	2.95
6105MHz_TX	Pass	PK	5.969G	92.89	Inf	-Inf	3	Vertical	233	2.95
6105MHz_TX	Pass	AV	5.921G	51.50	68.20	-16.70	3	Horizontal	347	1.00
6105MHz_TX	Pass	AV	6.103G	92.80	Inf	-Inf	3	Horizontal	347	1.00
6105MHz_TX	Pass	PK	5.919G	67.73	88.20	-20.47	3	Horizontal	347	1.00
6105MHz_TX	Pass	PK	6.083G	104.26	Inf	-Inf	3	Horizontal	347	1.00
6105MHz_TX	Pass	AV	12.14088G	39.14	54.00	-14.86	3	Vertical	350	1.50
6105MHz_TX	Pass	PK	12.05384G	51.46	74.00	-22.54	3	Vertical	350	1.50
6105MHz_TX	Pass	AV	12.13G	39.16	54.00	-14.84	3	Horizontal	117	1.50
6105MHz_TX	Pass	PK	12.1332G	51.62	74.00	-22.38	3	Horizontal	117	1.50
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz_TX	Pass	AV	5.925G	46.67	68.20	-21.53	3	Vertical	232	2.90
6105MHz_TX	Pass	AV	6.027G	81.80	Inf	-Inf	3	Vertical	232	2.90
6105MHz_TX	Pass	PK	5.925G	57.77	88.20	-30.43	3	Vertical	232	2.90
6105MHz_TX	Pass	PK	6.027G	93.30	Inf	-Inf	3	Vertical	232	2.90
6105MHz_TX	Pass	AV	5.921G	51.12	68.20	-17.08	3	Horizontal	346	1.00
6105MHz_TX	Pass	AV	6.103G	93.12	Inf	-Inf	3	Horizontal	346	1.00
6105MHz_TX	Pass	PK	5.917G	66.87	88.20	-21.33	3	Horizontal	346	1.00
6105MHz_TX	Pass	PK	6.167G	103.97	Inf	-Inf	3	Horizontal	346	1.00
6105MHz_TX	Pass	AV	12.13128G	39.45	54.00	-14.55	3	Vertical	305	2.93
6105MHz_TX	Pass	PK	12.08136G	51.56	74.00	-22.44	3	Vertical	305	2.93
6105MHz_TX	Pass	AV	12.16264G	39.34	54.00	-14.66	3	Horizontal	75	2.34
6105MHz_TX	Pass	PK	12.21832G	51.29	74.00	-22.71	3	Horizontal	75	2.34
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz_TX	Pass	AV	5.925G	45.52	68.20	-22.68	3	Vertical	270	2.74
6105MHz_TX	Pass	AV	6.193G	87.16	Inf	-Inf	3	Vertical	270	2.74
6105MHz_TX	Pass	PK	5.893G	57.55	88.20	-30.65	3	Vertical	270	2.74
6105MHz_TX	Pass	PK	6.195G	99.64	Inf	-Inf	3	Vertical	270	2.74
6105MHz_TX	Pass	AV	5.923G	50.23	68.20	-17.97	3	Horizontal	353	2.63
6105MHz_TX	Pass	AV	6.023G	92.97	Inf	-Inf	3	Horizontal	353	2.63
6105MHz_TX	Pass	PK	5.921G	62.67	88.20	-25.53	3	Horizontal	353	2.63
6105MHz_TX	Pass	PK	6.003G	104.02	Inf	-Inf	3	Horizontal	353	2.63
6105MHz_TX	Pass	AV	12.09672G	38.71	54.00	-15.29	3	Vertical	250	1.31
6105MHz_TX	Pass	PK	12.12296G	51.51	74.00	-22.49	3	Vertical	250	1.31
6105MHz_TX	Pass	AV	12.1428G	38.75	54.00	-15.25	3	Horizontal	211	1.50
6105MHz_TX	Pass	PK	12.12424G	51.54	74.00	-22.46	3	Horizontal	211	1.50


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5985MHz_TX

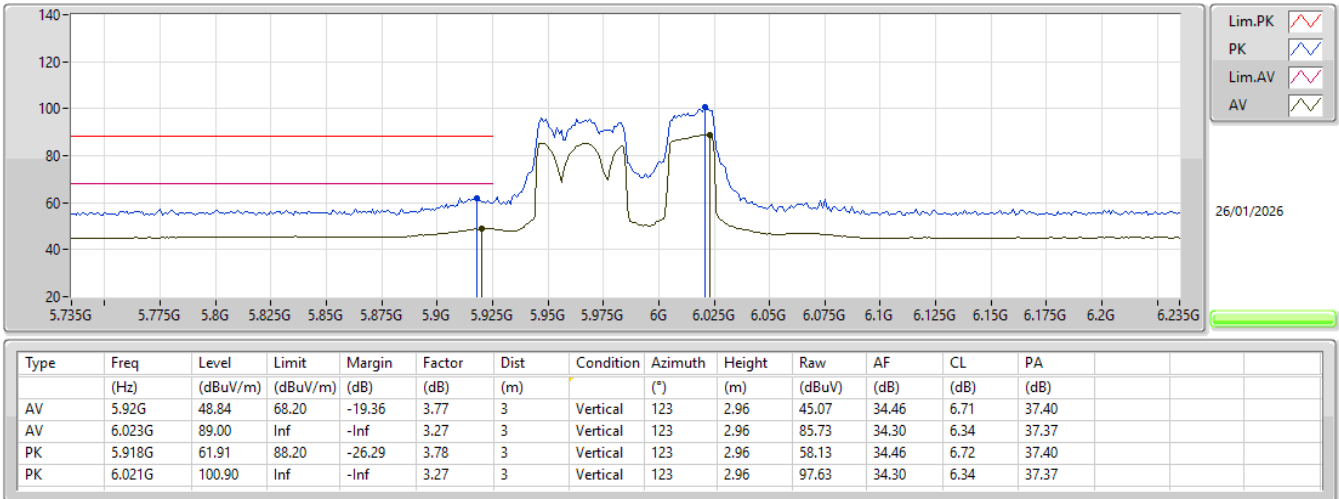


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5985MHz_TX

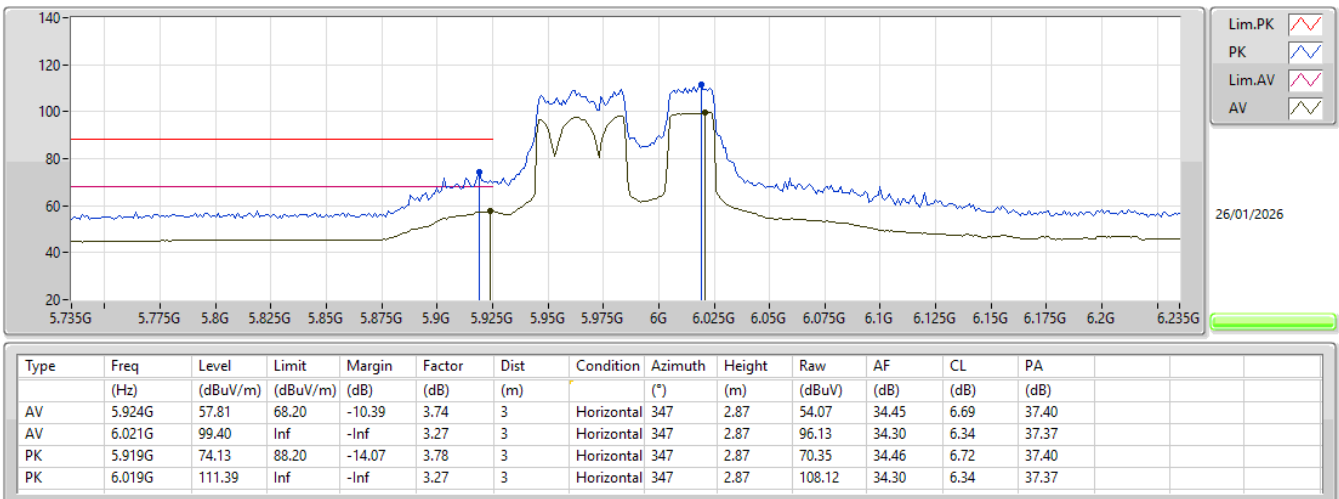


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5985MHz_TX

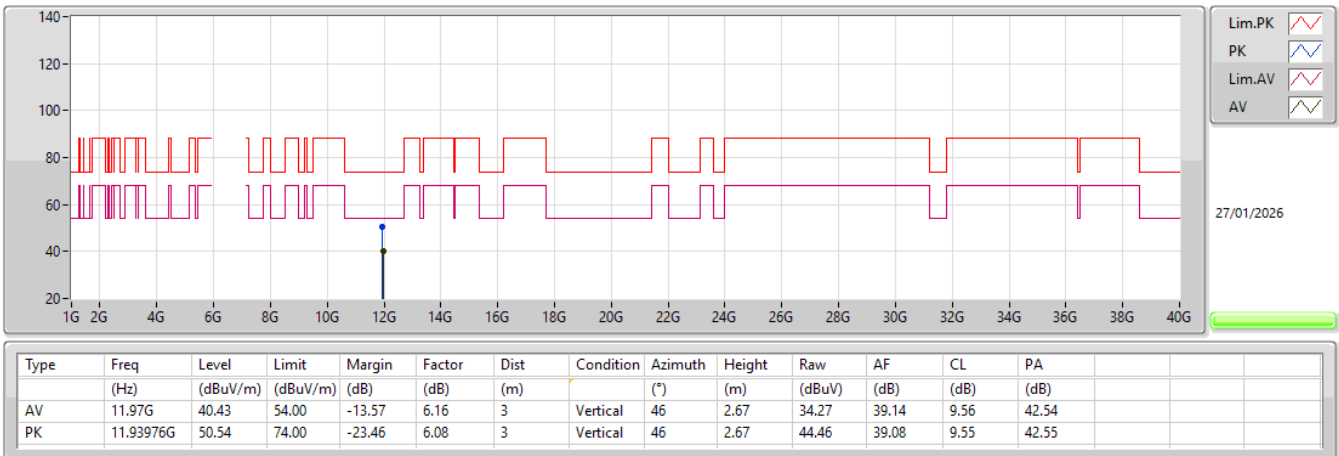


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

5985MHz_TX

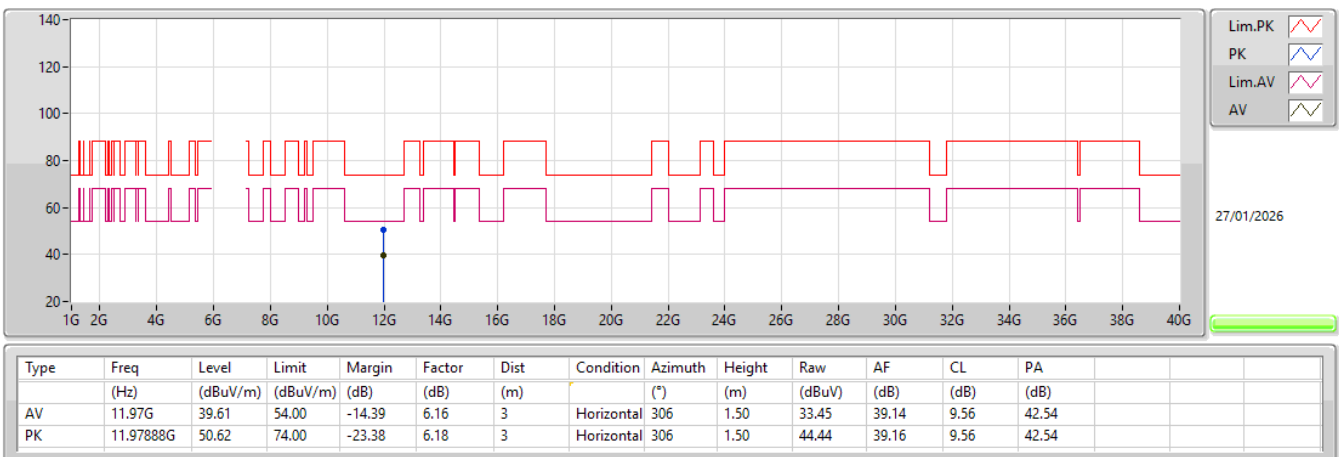


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

6025MHz_TX

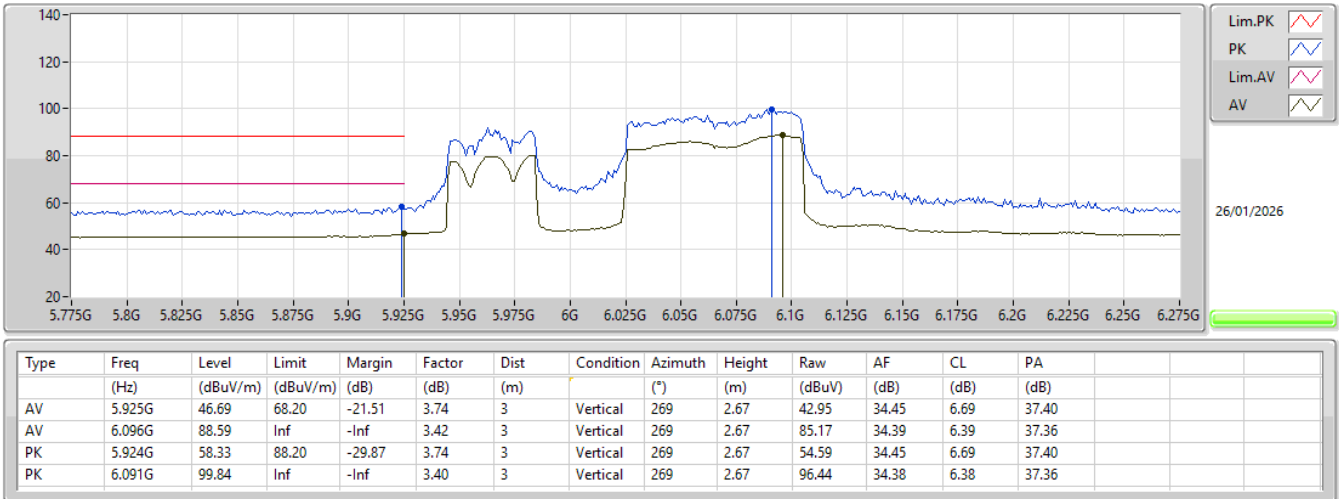


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

6025MHz_TX

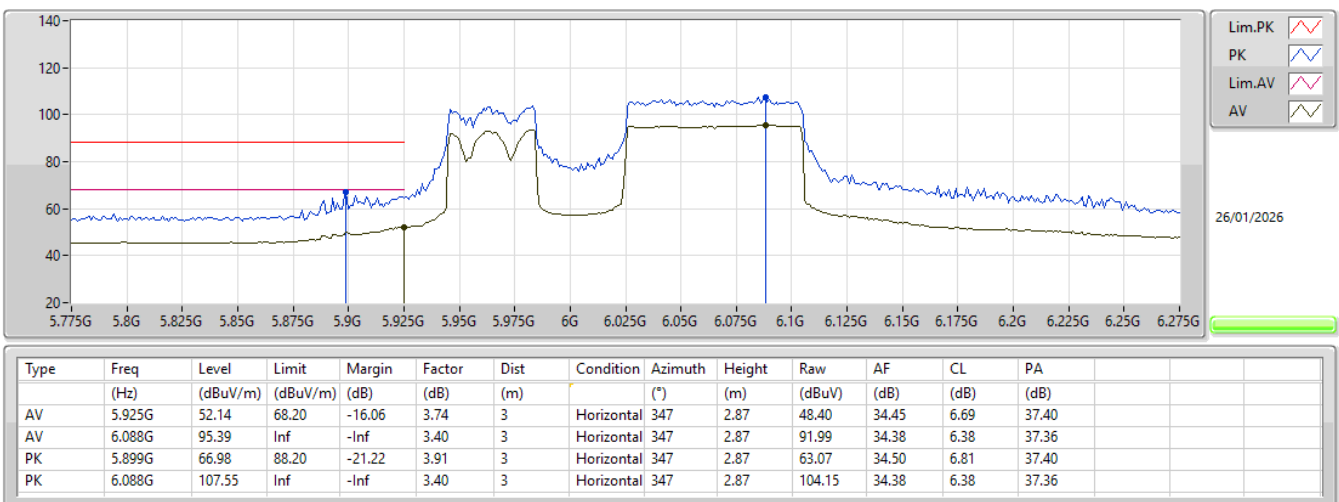


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

6025MHz_TX

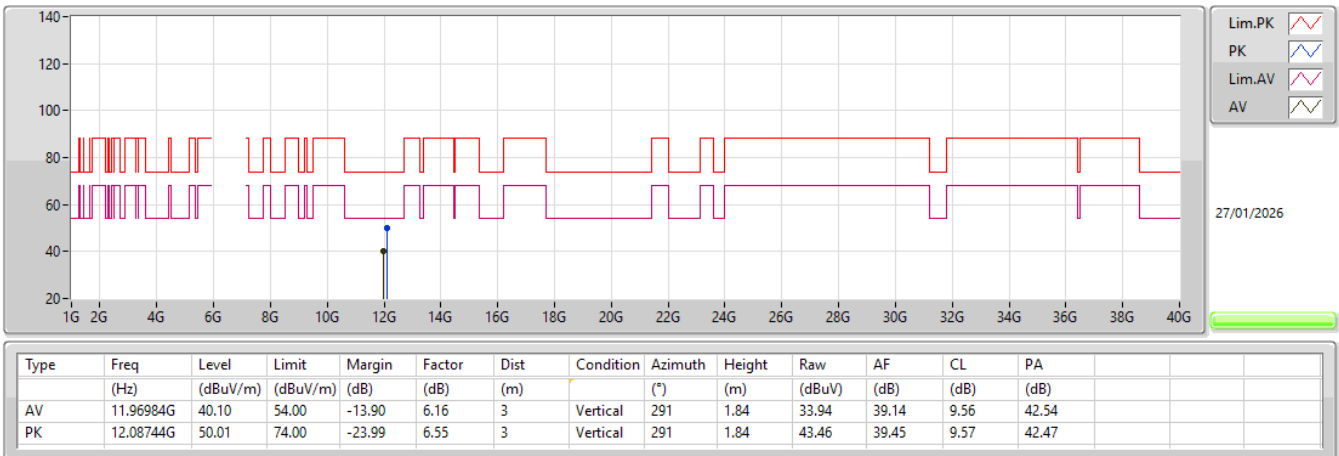


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

6025MHz_TX

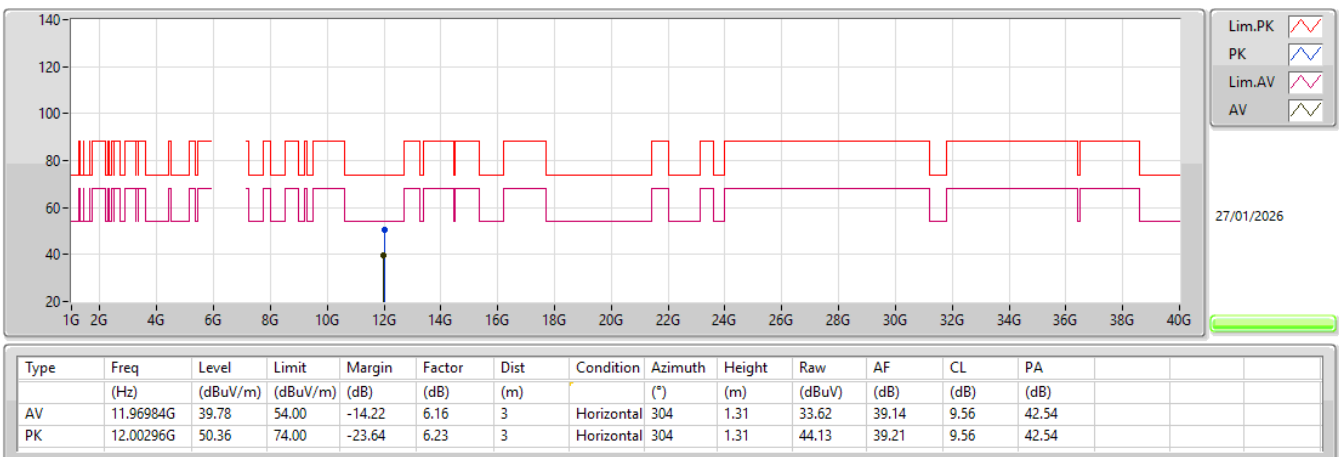

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX


6105MHz_TX

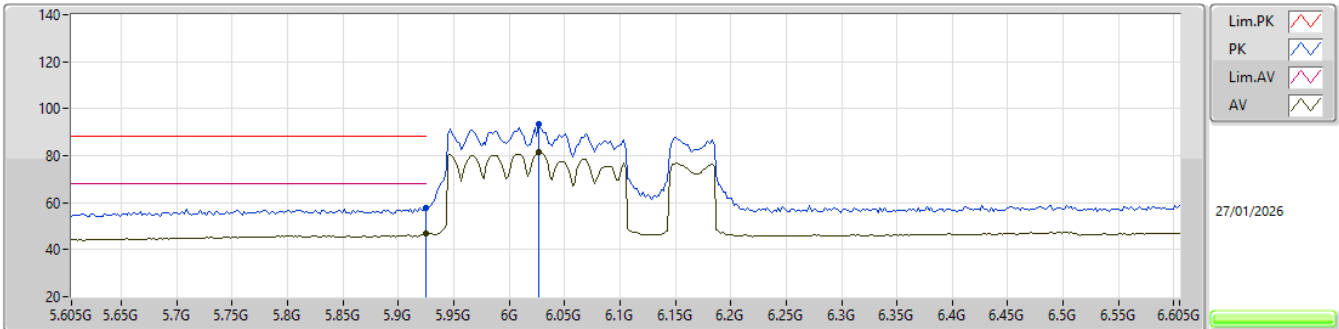

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)			(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.925G	46.67	68.20	-21.53	3.74	3	Vertical	232	2.90	42.93	34.45	6.69	37.40
AV	6.027G	81.80	Inf	-Inf	3.28	3	Vertical	232	2.90	78.52	34.30	6.35	37.37
PK	5.925G	57.77	88.20	-30.43	3.74	3	Vertical	232	2.90	54.03	34.45	6.69	37.40
PK	6.027G	93.30	Inf	-Inf	3.28	3	Vertical	232	2.90	90.02	34.30	6.35	37.37

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX


6105MHz_TX

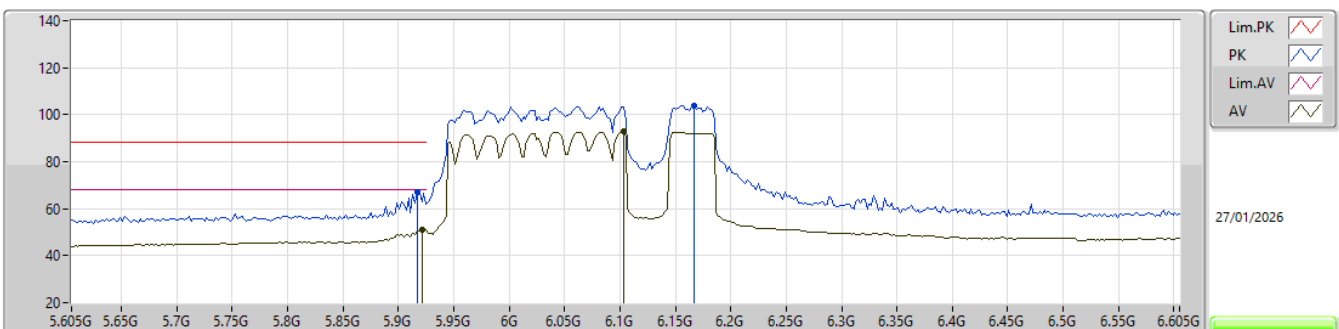

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)			(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.921G	51.12	68.20	-17.08	3.77	3	Horizontal	346	1.00	47.35	34.46	6.71	37.40
AV	6.103G	93.12	Inf	-Inf	3.44	3	Horizontal	346	1.00	89.68	34.41	6.39	37.36
PK	5.917G	66.87	88.20	-21.33	3.80	3	Horizontal	346	1.00	63.07	34.47	6.73	37.40
PK	6.167G	103.97	Inf	-Inf	3.61	3	Horizontal	346	1.00	100.36	34.53	6.43	37.35


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX

6105MHz_TX

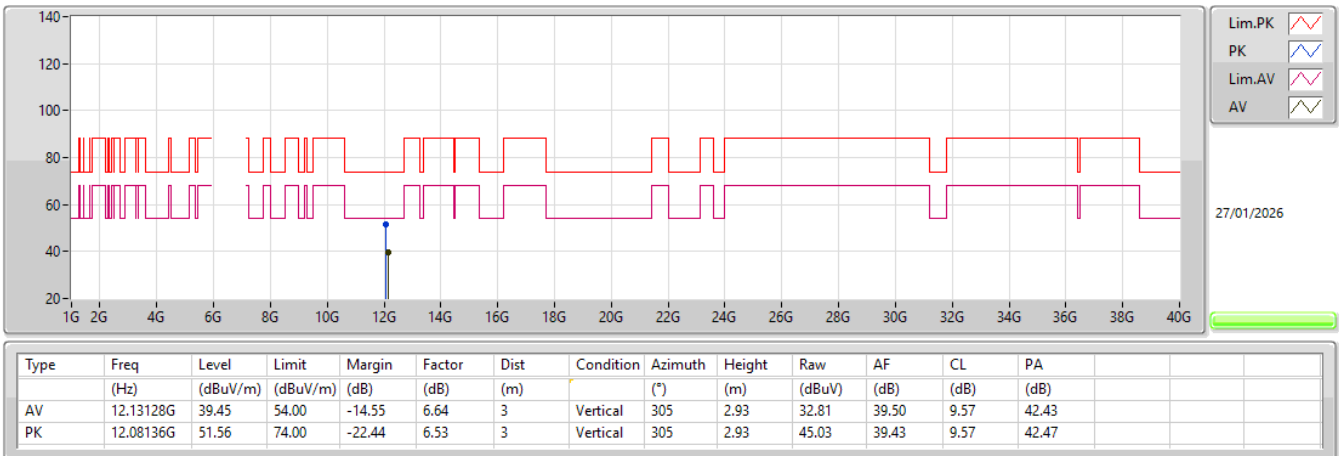

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_2TX

6105MHz_TX

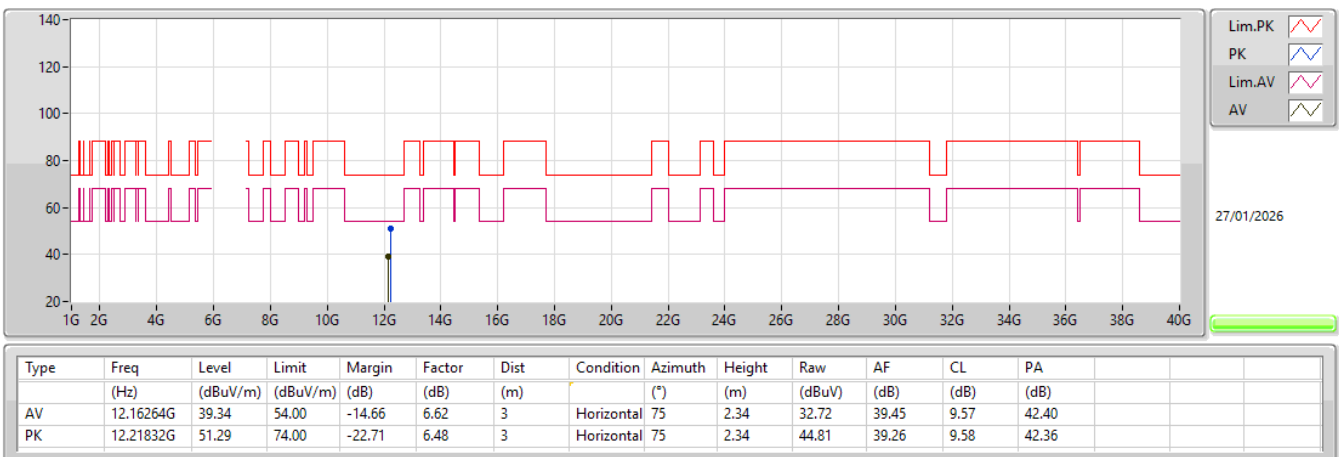



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	Pass	AV	5.921G	59.69	68.20	-8.51	3	Horizontal	348	1.01
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX	Pass	AV	5.921G	58.32	68.20	-9.88	3	Horizontal	350	1.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_2TX	Pass	AV	5.921G	60.81	68.20	-7.39	3	Horizontal	348	1.00


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	AV	5.924G	50.24	68.20	-17.96	3	Vertical	231	2.81
5985MHz	Pass	AV	5.987G	90.27	Inf	-Inf	3	Vertical	231	2.81
5985MHz	Pass	PK	5.924G	64.95	88.20	-23.25	3	Vertical	231	2.81
5985MHz	Pass	PK	5.987G	101.70	Inf	-Inf	3	Vertical	231	2.81
5985MHz	Pass	AV	5.921G	59.69	68.20	-8.51	3	Horizontal	348	1.01
5985MHz	Pass	AV	6.023G	98.98	Inf	-Inf	3	Horizontal	348	1.01
5985MHz	Pass	PK	5.921G	75.70	88.20	-12.50	3	Horizontal	348	1.01
5985MHz	Pass	PK	6.001G	110.55	Inf	-Inf	3	Horizontal	348	1.01
5985MHz	Pass	AV	11.96992G	39.51	54.00	-14.49	3	Vertical	353	1.50
5985MHz	Pass	PK	12.00808G	51.32	74.00	-22.68	3	Vertical	353	1.50
5985MHz	Pass	AV	11.96992G	38.99	54.00	-15.01	3	Horizontal	279	1.67
5985MHz	Pass	PK	11.9832G	51.70	74.00	-22.30	3	Horizontal	279	1.67
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.925G	49.71	68.20	-18.49	3	Vertical	231	2.91
6025MHz	Pass	AV	6.027G	87.09	Inf	-Inf	3	Vertical	231	2.91
6025MHz	Pass	PK	5.925G	62.59	88.20	-25.61	3	Vertical	231	2.91
6025MHz	Pass	PK	6.027G	97.79	Inf	-Inf	3	Vertical	231	2.91
6025MHz	Pass	AV	5.921G	58.32	68.20	-9.88	3	Horizontal	350	1.00
6025MHz	Pass	AV	6.023G	97.34	Inf	-Inf	3	Horizontal	350	1.00
6025MHz	Pass	PK	5.914G	73.47	88.20	-14.73	3	Horizontal	350	1.00
6025MHz	Pass	PK	6.021G	108.12	Inf	-Inf	3	Horizontal	350	1.00
6025MHz	Pass	AV	12.07976G	38.78	54.00	-15.22	3	Vertical	79	1.16
6025MHz	Pass	PK	12.12936G	51.89	74.00	-22.11	3	Vertical	79	1.16
6025MHz	Pass	AV	12.08184G	38.81	54.00	-15.19	3	Horizontal	338	2.06
6025MHz	Pass	PK	12.09912G	52.08	74.00	-21.92	3	Horizontal	338	2.06
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.925G	48.18	68.20	-20.02	3	Vertical	231	2.91
6025MHz	Pass	AV	6.027G	87.32	Inf	-Inf	3	Vertical	231	2.91
6025MHz	Pass	PK	5.92G	65.28	88.20	-22.92	3	Vertical	231	2.91
6025MHz	Pass	PK	6.027G	97.94	Inf	-Inf	3	Vertical	231	2.91
6025MHz	Pass	AV	5.922G	55.18	68.20	-13.02	3	Horizontal	351	1.00
6025MHz	Pass	AV	6.042G	96.63	Inf	-Inf	3	Horizontal	351	1.00
6025MHz	Pass	PK	5.919G	76.04	88.20	-12.16	3	Horizontal	351	1.00
6025MHz	Pass	PK	6.082G	107.71	Inf	-Inf	3	Horizontal	351	1.00
6025MHz	Pass	AV	12.11432G	38.77	54.00	-15.23	3	Vertical	117	1.37
6025MHz	Pass	PK	12.1244G	51.40	74.00	-22.60	3	Vertical	117	1.37
6025MHz	Pass	AV	12.04984G	38.83	54.00	-15.17	3	Horizontal	28	1.50
6025MHz	Pass	PK	12.09928G	51.56	74.00	-22.44	3	Horizontal	28	1.50
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.925G	48.21	68.20	-19.99	3	Vertical	230	2.96
6105MHz	Pass	AV	6.087G	80.67	Inf	-Inf	3	Vertical	230	2.96
6105MHz	Pass	PK	5.915G	62.39	88.20	-25.81	3	Vertical	230	2.96
6105MHz	Pass	PK	6.087G	91.84	Inf	-Inf	3	Vertical	230	2.96
6105MHz	Pass	AV	5.921G	54.30	68.20	-13.90	3	Horizontal	347	1.00
6105MHz	Pass	AV	6.103G	94.63	Inf	-Inf	3	Horizontal	347	1.00
6105MHz	Pass	PK	5.919G	70.19	88.20	-18.01	3	Horizontal	347	1.00
6105MHz	Pass	PK	6.103G	106.89	Inf	-Inf	3	Horizontal	347	1.00
6105MHz	Pass	AV	12.114G	38.72	54.00	-15.28	3	Vertical	329	2.04
6105MHz	Pass	PK	12.194G	51.59	74.00	-22.41	3	Vertical	329	2.04
6105MHz	Pass	AV	12.12904G	38.73	54.00	-15.27	3	Horizontal	126	2.11
6105MHz	Pass	PK	12.1604G	52.17	74.00	-21.83	3	Horizontal	126	2.11
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.925G	49.19	68.20	-19.01	3	Vertical	241	2.79
6105MHz	Pass	AV	6.103G	82.14	Inf	-Inf	3	Vertical	241	2.79
6105MHz	Pass	PK	5.915G	62.39	88.20	-25.81	3	Vertical	241	2.79
6105MHz	Pass	PK	6.103G	93.30	Inf	-Inf	3	Vertical	241	2.79
6105MHz	Pass	AV	5.921G	57.30	68.20	-10.90	3	Horizontal	344	1.01
6105MHz	Pass	AV	6.103G	94.57	Inf	-Inf	3	Horizontal	344	1.01
6105MHz	Pass	PK	5.917G	72.51	88.20	-15.69	3	Horizontal	344	1.01
6105MHz	Pass	PK	6.103G	105.41	Inf	-Inf	3	Horizontal	344	1.01

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6105MHz	Pass	AV	12.14888G	38.75	54.00	-15.25	3	Vertical	32	1.50
6105MHz	Pass	PK	12.07208G	52.13	74.00	-21.87	3	Vertical	32	1.50
6105MHz	Pass	AV	12.07944G	38.79	54.00	-15.21	3	Horizontal	295	1.50
6105MHz	Pass	PK	12.2564G	51.21	74.00	-22.79	3	Horizontal	295	1.50
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_2TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	AV	5.925G	52.69	68.20	-15.51	3	Vertical	231	3.00
6105MHz	Pass	AV	6.067G	81.68	Inf	-Inf	3	Vertical	231	3.00
6105MHz	Pass	PK	5.925G	64.62	88.20	-23.58	3	Vertical	231	3.00
6105MHz	Pass	PK	6.067G	93.07	Inf	-Inf	3	Vertical	231	3.00
6105MHz	Pass	AV	5.921G	60.81	68.20	-7.39	3	Horizontal	348	1.00
6105MHz	Pass	AV	6.103G	94.45	Inf	-Inf	3	Horizontal	348	1.00
6105MHz	Pass	PK	5.921G	74.04	88.20	-14.16	3	Horizontal	348	1.00
6105MHz	Pass	PK	6.103G	105.54	Inf	-Inf	3	Horizontal	348	1.00
6105MHz	Pass	AV	12.0788G	38.73	54.00	-15.27	3	Vertical	72	2.65
6105MHz	Pass	PK	12.13192G	51.25	74.00	-22.75	3	Vertical	72	2.65
6105MHz	Pass	AV	12.0788G	38.83	54.00	-15.17	3	Horizontal	279	2.10
6105MHz	Pass	PK	12.20904G	52.01	74.00	-21.99	3	Horizontal	279	2.10


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5985MHz_TX

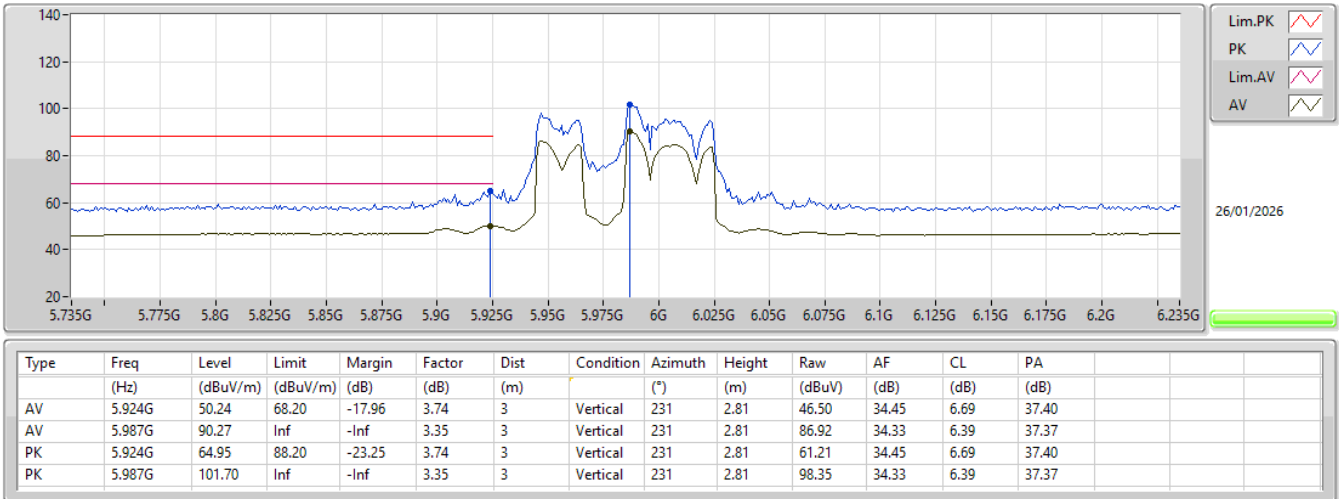


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5985MHz_TX

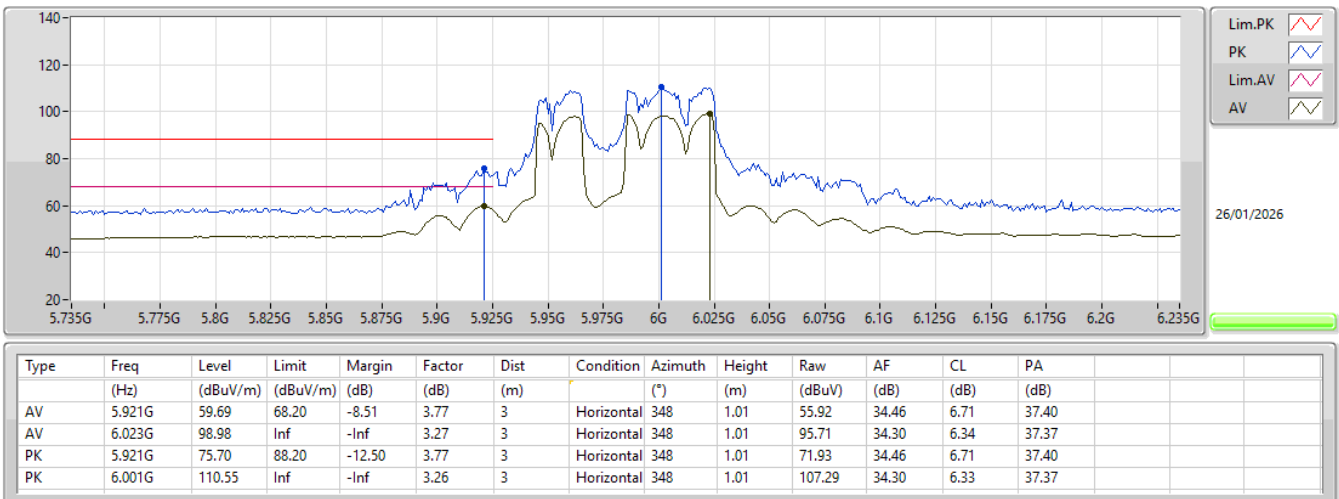


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5985MHz_TX

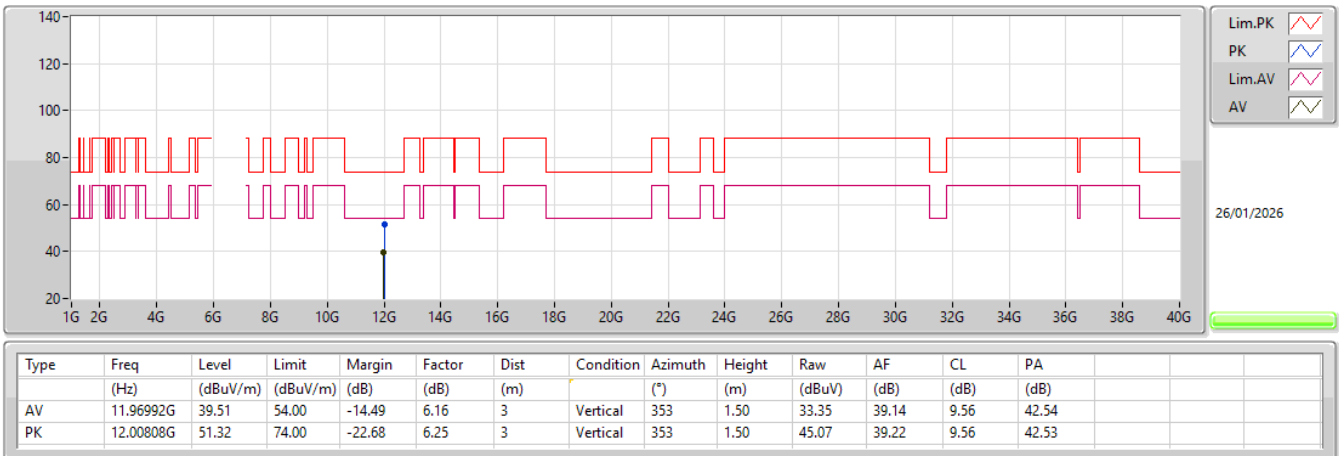


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

5985MHz_TX

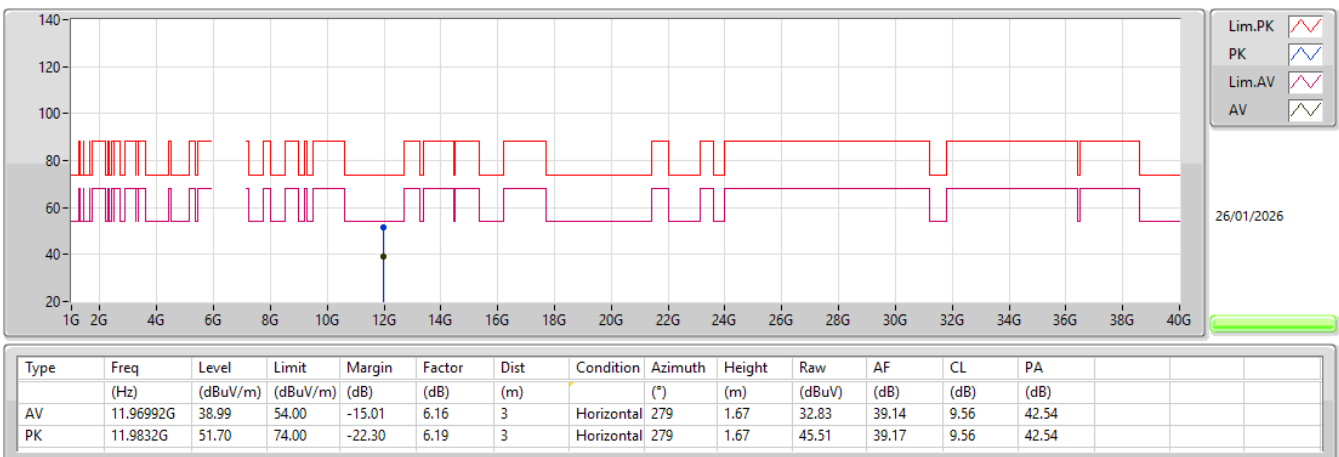


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX

6025MHz_TX

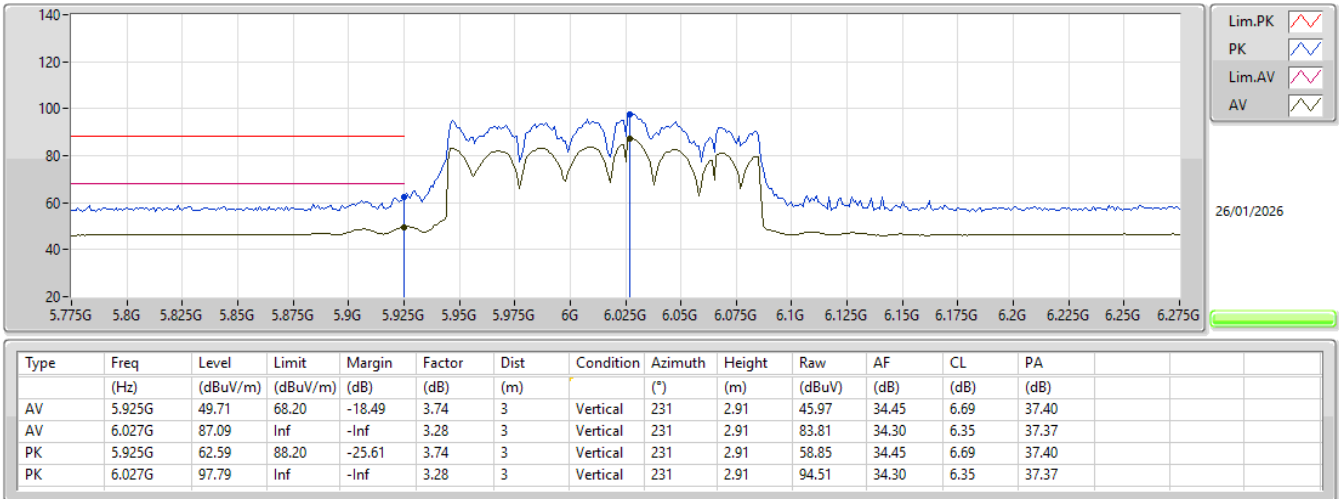


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX

6025MHz_TX

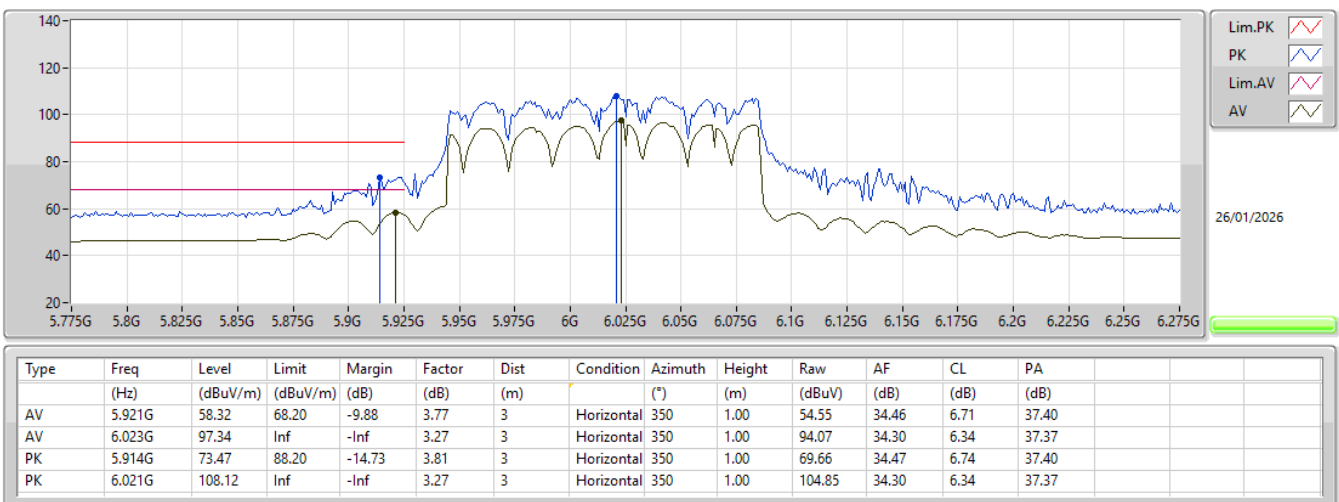


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX

6025MHz_TX

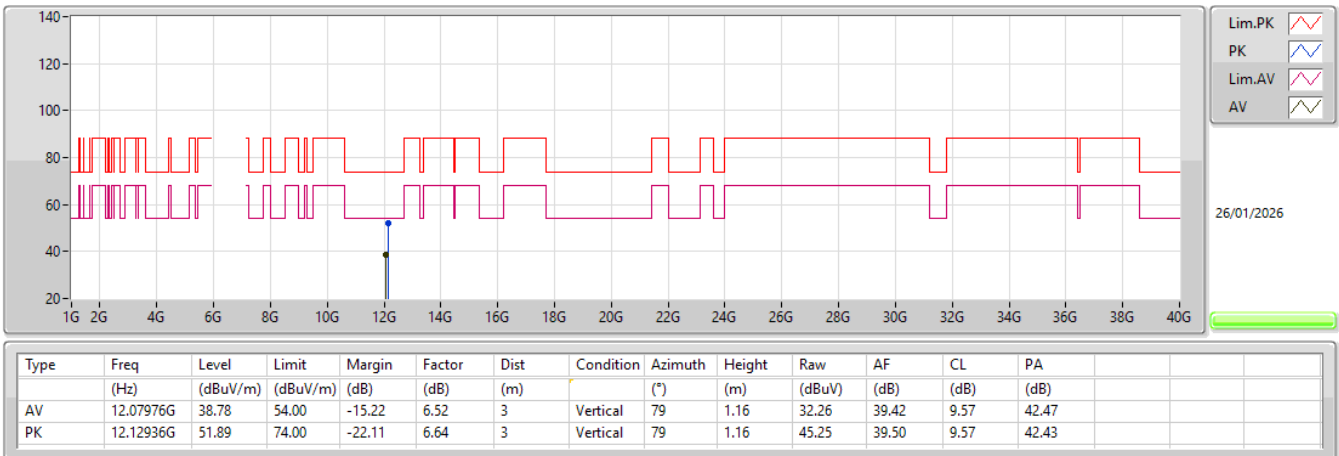


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_2TX

6025MHz_TX

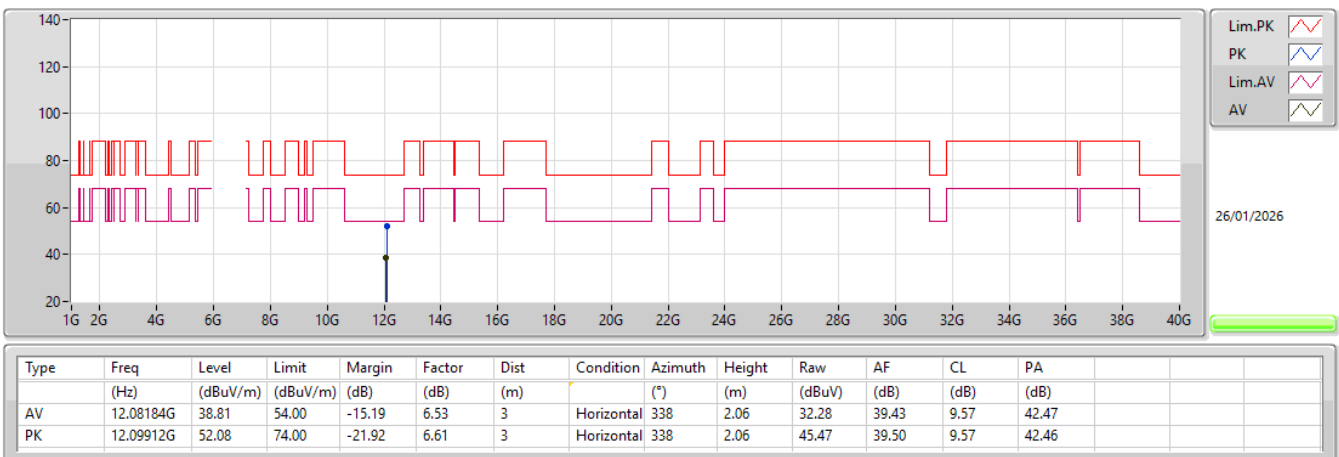

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP_6_2TX


6105MHz_TX

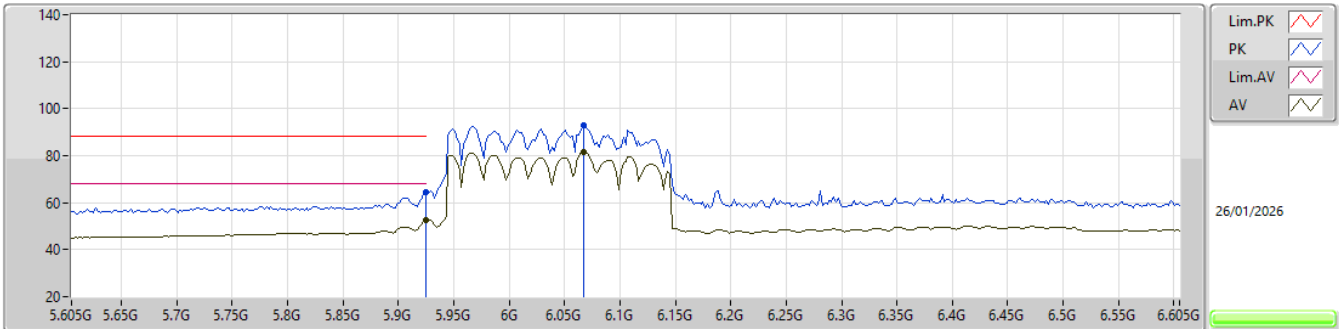

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)			(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.925G	52.69	68.20	-15.51	3.74	3	Vertical	231	3.00	48.95	34.45	6.69	37.40
AV	6.067G	81.68	Inf	-Inf	3.34	3	Vertical	231	3.00	78.34	34.33	6.37	37.36
PK	5.925G	64.62	88.20	-23.58	3.74	3	Vertical	231	3.00	60.88	34.45	6.69	37.40
PK	6.067G	93.07	Inf	-Inf	3.34	3	Vertical	231	3.00	89.73	34.33	6.37	37.36

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP_6_2TX


6105MHz_TX

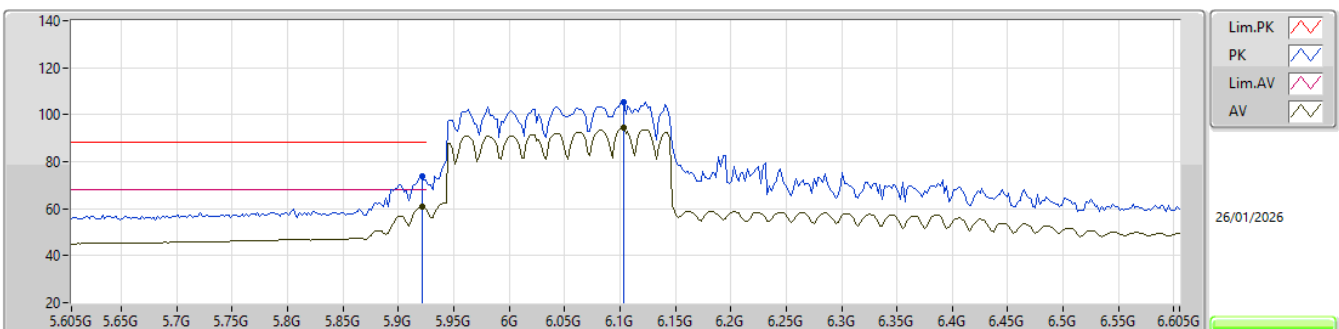

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Raw	AF	CL	PA
(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)			(°)	(m)	(dBuV)	(dB)	(dB)	(dB)
AV	5.921G	60.81	68.20	-7.39	3.77	3	Horizontal	348	1.00	57.04	34.46	6.71	37.40
AV	6.103G	94.45	Inf	-Inf	3.44	3	Horizontal	348	1.00	91.01	34.41	6.39	37.36
PK	5.921G	74.04	88.20	-14.16	3.77	3	Horizontal	348	1.00	70.27	34.46	6.71	37.40
PK	6.103G	105.54	Inf	-Inf	3.44	3	Horizontal	348	1.00	102.10	34.41	6.39	37.36


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP_2TX

6105MHz_TX

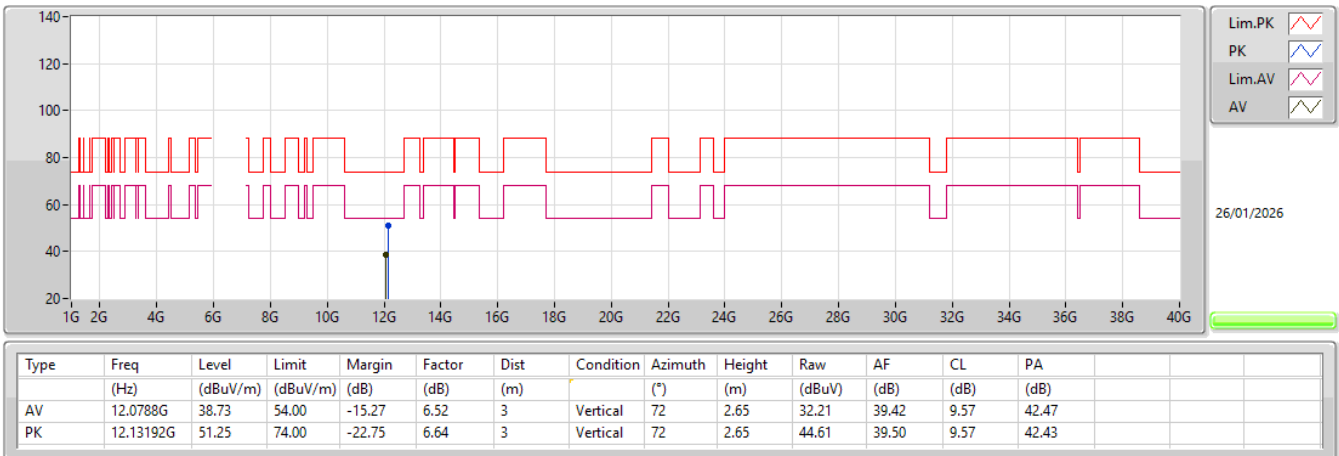

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP_2TX

6105MHz_TX

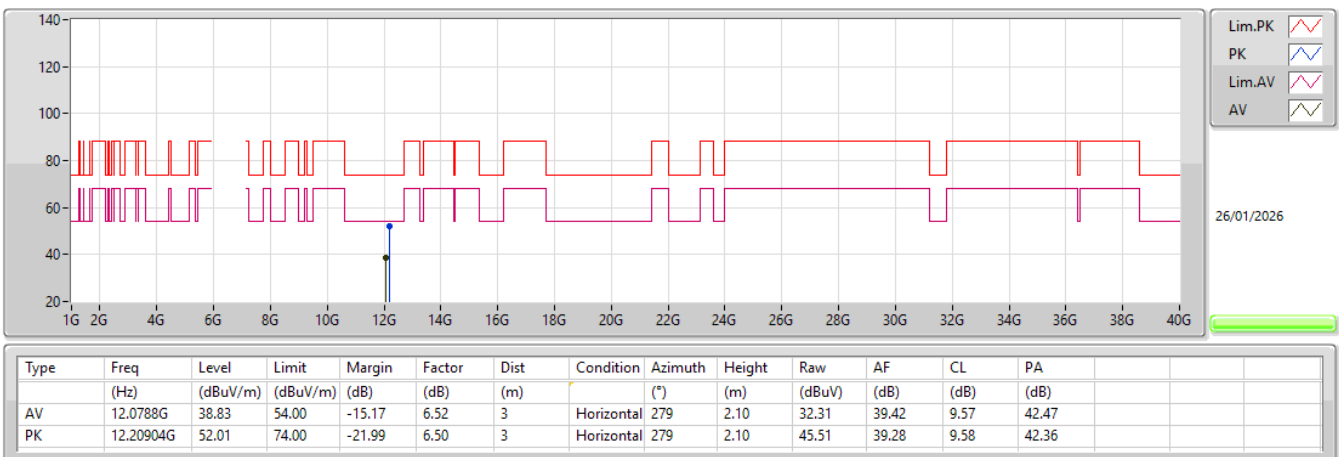




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	4.91397G	52.56	54.00	-1.44	Vertical


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
Mode 1	Pass	AV	4.91397G	52.56	54.00	-1.44	3	Vertical	58	1.51	-
Mode 1	Pass	AV	7.37217G	48.01	54.00	-5.99	3	Vertical	316	1.65	-
Mode 1	Pass	AV	11.00171G	48.25	54.00	-5.75	3	Vertical	41	1.60	-
Mode 1	Pass	AV	12.28593G	47.86	54.00	-6.14	3	Vertical	316	1.58	-
Mode 1	Pass	AV	13.39006G	44.56	54.00	-9.44	3	Vertical	192	1.50	-
Mode 1	Pass	PK	4.91397G	54.97	74.00	-19.03	3	Vertical	58	1.51	-
Mode 1	Pass	PK	7.37244G	54.66	74.00	-19.34	3	Vertical	316	1.65	-
Mode 1	Pass	PK	10.99691G	59.49	74.00	-14.51	3	Vertical	41	1.60	-
Mode 1	Pass	PK	12.28659G	56.90	74.00	-17.10	3	Vertical	316	1.58	-
Mode 1	Pass	PK	13.38136G	56.31	74.00	-17.69	3	Vertical	192	1.50	-
Mode 1	Pass	AV	4.914G	51.94	54.00	-2.06	3	Horizontal	31	1.50	-
Mode 1	Pass	AV	7.37223G	51.52	54.00	-2.48	3	Horizontal	2	2.13	-
Mode 1	Pass	AV	10.9982G	46.55	54.00	-7.45	3	Horizontal	67	1.73	-
Mode 1	Pass	AV	12.28626G	49.32	54.00	-4.68	3	Horizontal	287	1.87	-
Mode 1	Pass	AV	13.3945G	46.55	54.00	-7.45	3	Horizontal	286	1.86	-
Mode 1	Pass	PK	4.91409G	54.44	74.00	-19.56	3	Horizontal	31	1.50	-
Mode 1	Pass	PK	7.37241G	56.54	74.00	-17.46	3	Horizontal	2	2.13	-
Mode 1	Pass	PK	11.00276G	57.79	74.00	-16.21	3	Horizontal	67	1.73	-
Mode 1	Pass	PK	12.28692G	57.70	74.00	-16.30	3	Horizontal	287	1.87	-
Mode 1	Pass	PK	13.39552G	58.55	74.00	-15.45	3	Horizontal	286	1.86	-

Radiated Emissions above 1GHz_Mode 1

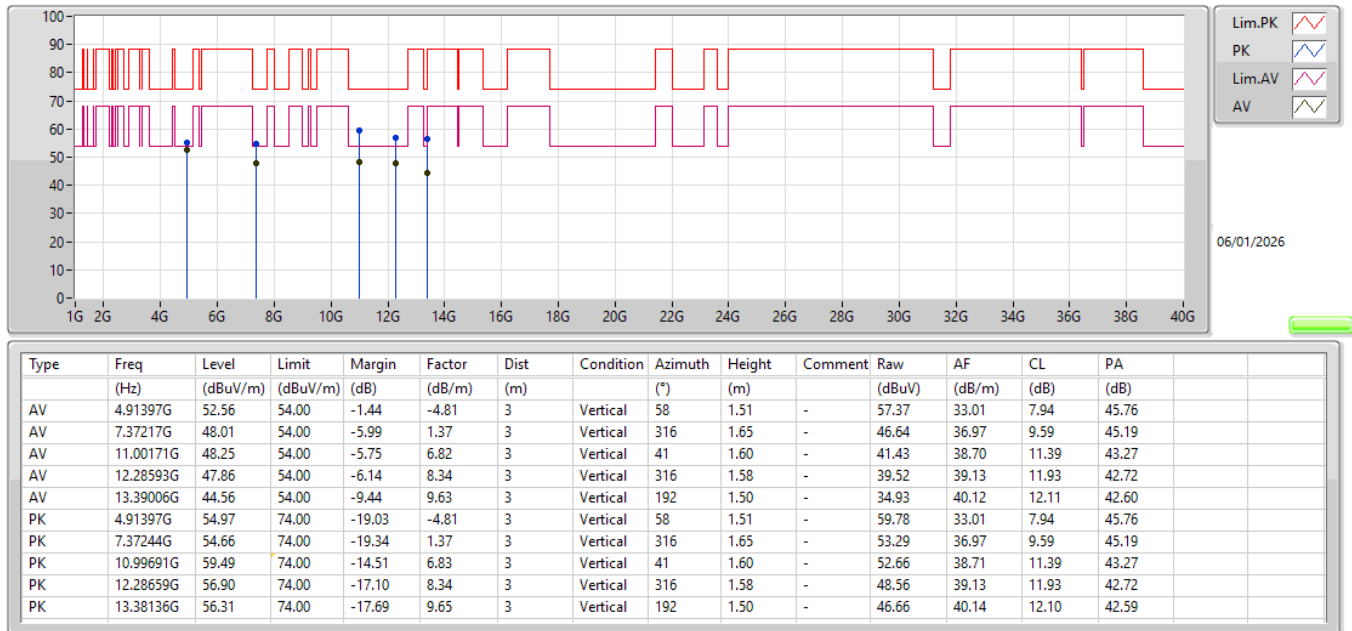

Radiated Emissions above 1GHz_Mode 1

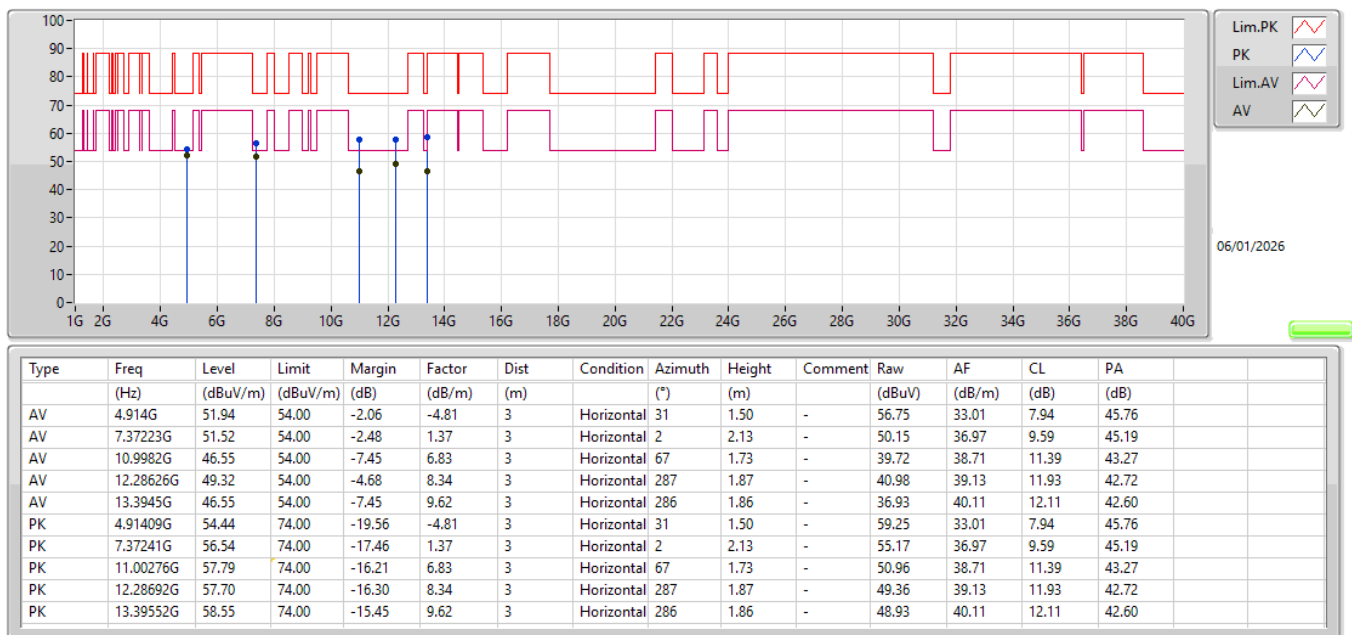




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	12.05864G	50.98	54.00	-3.02	Horizontal

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (?X)	Height (m)	Comments
Mode 1	Pass	AV	4.824G	41.93	54.00	-12.07	3	Vertical	20	2.90	-
Mode 1	Pass	AV	10.36582G	41.57	68.20	-26.63	3	Vertical	327	2.86	-
Mode 1	Pass	AV	12.0586G	49.88	54.00	-4.12	3	Vertical	296	1.82	-
Mode 1	Pass	AV	13.39004G	42.42	54.00	-11.58	3	Vertical	304	1.62	-
Mode 1	Pass	AV	15.54552G	36.80	54.00	-17.20	3	Vertical	75	1.50	-
Mode 1	Pass	PK	4.82384G	46.85	74.00	-27.15	3	Vertical	20	2.90	-
Mode 1	Pass	PK	10.36576G	52.66	88.20	-35.54	3	Vertical	327	2.86	-
Mode 1	Pass	PK	12.05848G	56.56	74.00	-17.44	3	Vertical	296	1.82	-
Mode 1	Pass	PK	13.38956G	54.54	74.00	-19.46	3	Vertical	304	1.62	-
Mode 1	Pass	PK	15.54348G	48.99	74.00	-25.01	3	Vertical	75	1.50	-
Mode 1	Pass	AV	4.824G	40.53	54.00	-13.47	3	Horizontal	37	1.80	-
Mode 1	Pass	AV	10.36127G	41.71	68.20	-26.49	3	Horizontal	47	1.50	-
Mode 1	Pass	AV	12.05864G	50.98	54.00	-3.02	3	Horizontal	349	1.60	-
Mode 1	Pass	AV	13.39132G	39.56	54.00	-14.44	3	Horizontal	205	1.50	-
Mode 1	Pass	AV	15.5421G	36.87	54.00	-17.13	3	Horizontal	168	1.50	-
Mode 1	Pass	PK	4.82396G	45.87	74.00	-28.13	3	Horizontal	37	1.80	-
Mode 1	Pass	PK	10.3576G	51.45	88.20	-36.75	3	Horizontal	47	1.50	-
Mode 1	Pass	PK	12.05908G	57.78	74.00	-16.22	3	Horizontal	349	1.60	-
Mode 1	Pass	PK	13.39465G	51.70	74.00	-22.30	3	Horizontal	205	1.50	-
Mode 1	Pass	PK	15.54348G	49.57	74.00	-24.43	3	Horizontal	168	1.50	-

Radiated Emissions above 1GHz_Mode 1

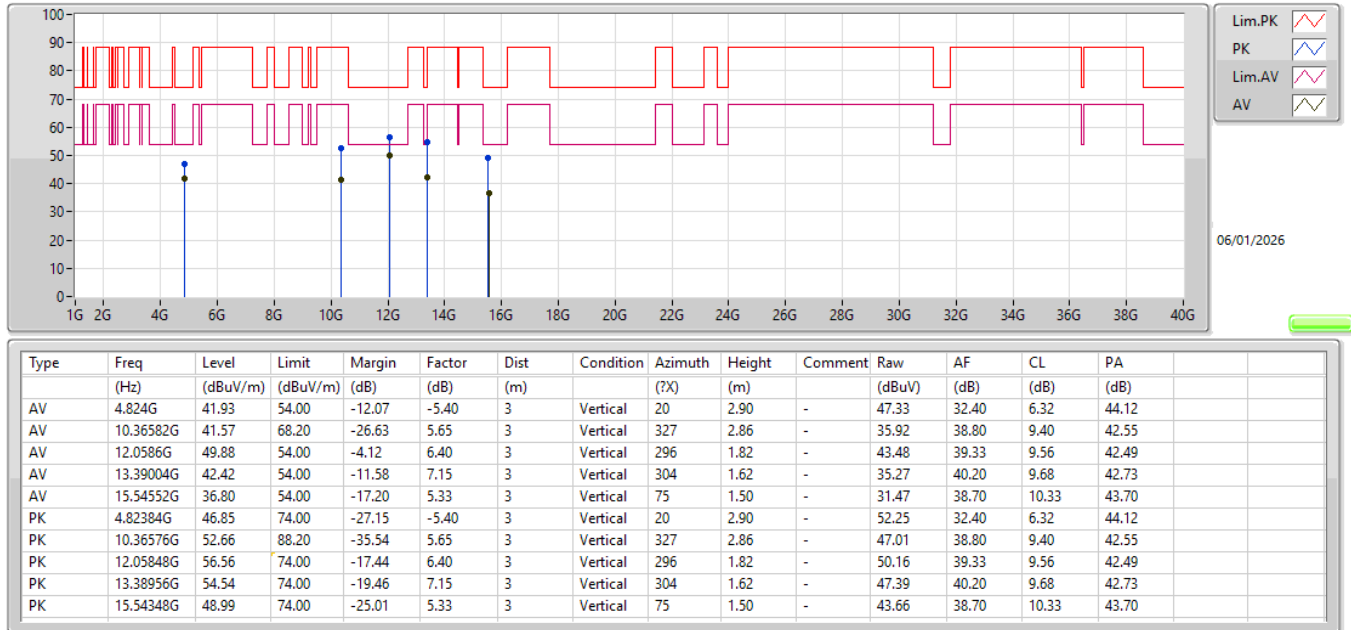

Radiated Emissions above 1GHz_Mode 1

