



element

Trane

USB to WiFi Adapter

FCC 15.247:2020

802.11bgn

Report: TRNE0022.1, Issue Date: October 21, 2020



NVLAP LAB CODE: 200881-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST

Last Date of Test: August 27, 2020

Trane

EUT: USB to WiFi Adapter

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2020	ANSI C63.10:2013, KDB 558074

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required to show compliance of the module in the host.
11.6	Duty Cycle	Yes	N/A	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.2.2.4	Output Power	Yes	Pass	
11.9.2.2.4	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:



Eric Brandon, Department Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE



For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
BSMI				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157

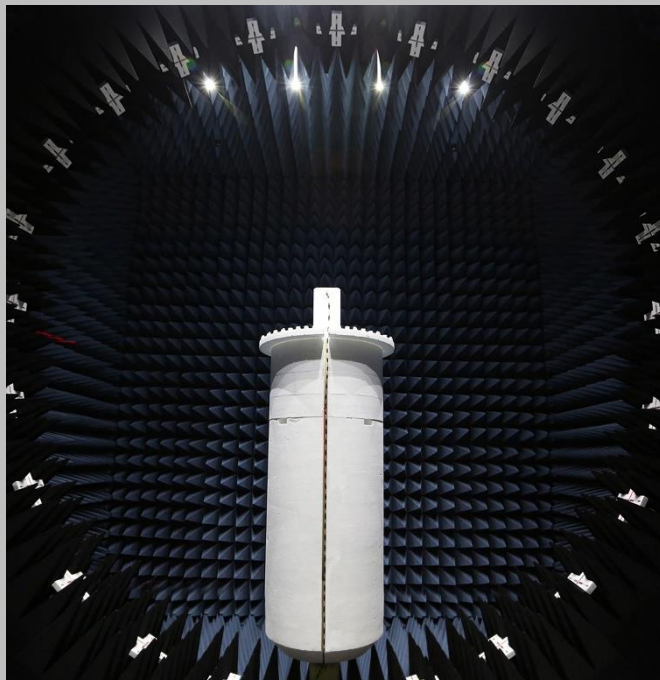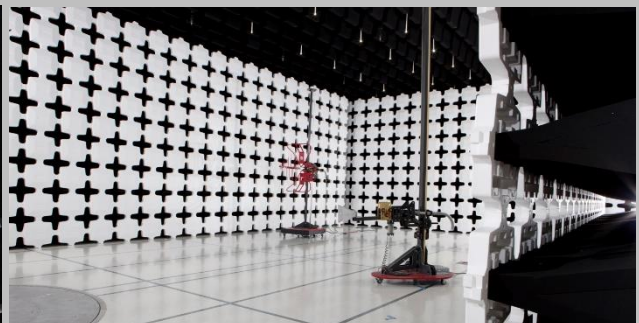

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


Test	+ MU	- MU
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.6 dB	-2.6 dB

Test Setup Block Diagrams


Antenna Port Conducted Measurements

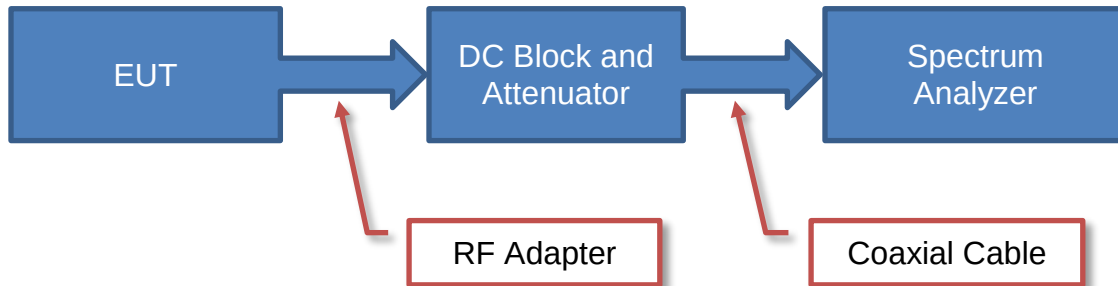

Near Field Test Fixture Measurements

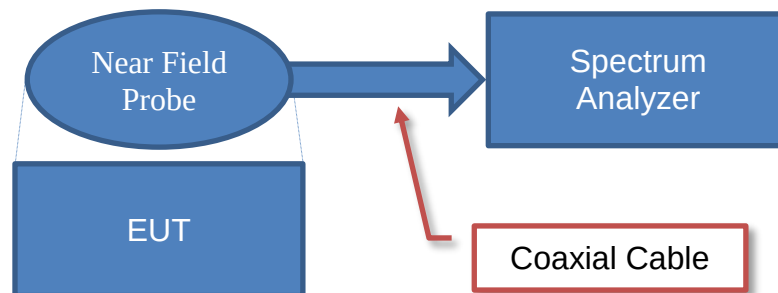

Spurious Radiated Emissions

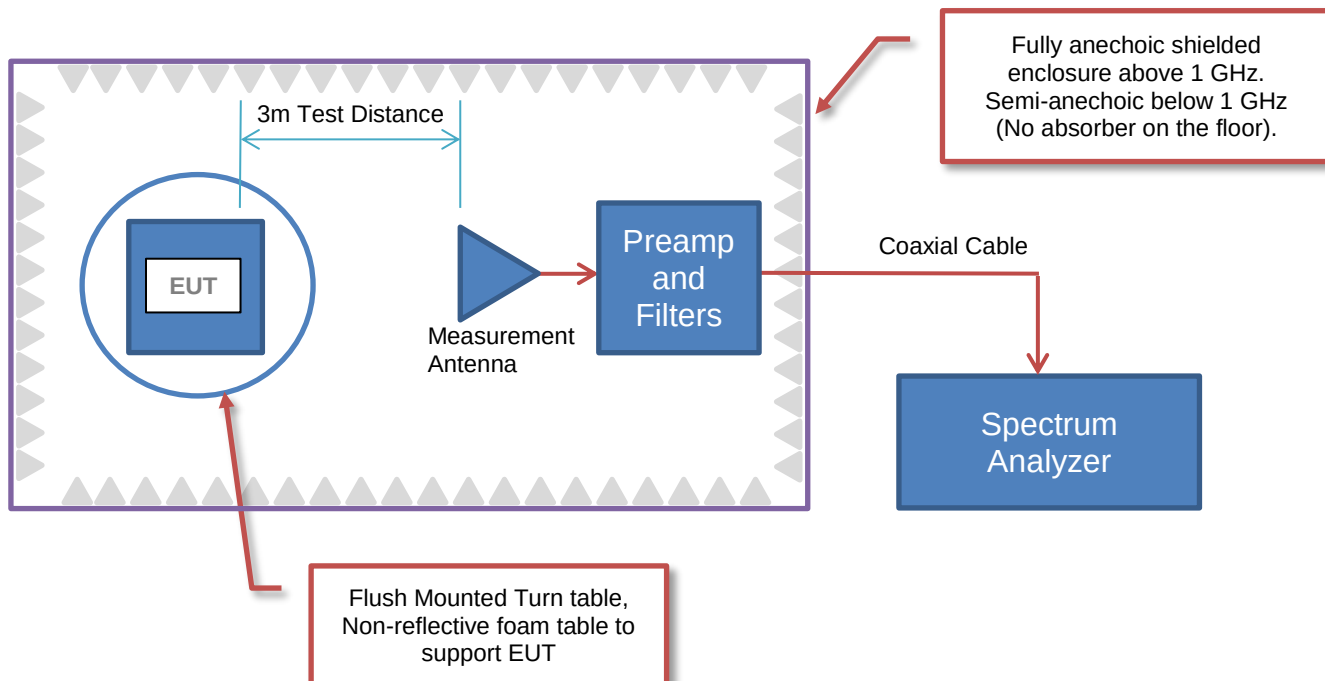

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	Trane
Address:	P.O. Box 220 c/o Ingersoll Rand
City, State, Zip:	Davidson, NC 28036-9721
Test Requested By:	Bill Walters
EUT:	USB to WiFi Adapter
First Date of Test:	August 19, 2020
Last Date of Test:	August 27, 2020
Receipt Date of Samples:	August 19, 2020
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
USB to WiFi Adapter
Testing Objective:
To demonstrate compliance of the module in the host per KDB 996369 for the 802.11 radio under FCC 15.247 for operation in the 2.4 GHz band.

CONFIGURATIONS

Configuration TRNE0022- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
USB to WiFi Adapter	Trane	X13651743	E19M60061
Control Box	Trane	None	None

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	Dell	Latitude 5400	24LF3X2
AC/DC Adapter (Laptop)	Dell	LA65NM130	CN-0G4X7T-LOC00-9BG-38AB-A05

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable	No	1.8m	No	Control Box	AC Mains
Ethernet Cable	No	>3.0m	No	Control Box	Laptop
AC Cable (Laptop)	No	1.0m	No	AC Mains	AC Adapter (Laptop)
DC Cable (Laptop)	No	1.8m	Yes	AC Adapter (Laptop)	Laptop

Configuration TRNE0022- 3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Control Box	Trane	None	None
USB to WiFi Adapter	Trane	X13651743	0022A301FF5D

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	Dell	Latitude 5400	24LF3X2
AC/DC Adapter (Laptop)	Dell	LA65NM130	CN-0G4X7T-LOC00-9BG-38AB-A05

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable	No	1.8m	No	Control Box	AC Mains
AC Cable (Laptop)	No	1.0m	No	AC Mains	AC Adapter (Laptop)
DC Cable (Laptop)	No	1.8m	Yes	AC Adapter (Laptop)	Laptop
Ethernet Cable	No	1.8m	No	Laptop	Control Box

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2020-08-19	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2020-08-24	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2020-08-24	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2020-08-24	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2020-08-24	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2020-08-24	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2020-08-24	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2020-08-24	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
9	2020-08-27	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

POWER SETTINGS



The power settings, antenna gain value(s) and cable loss (if applicable) used for the testing contained in this report were provided by the customer and will affect the validity of the results. Element assumes no responsibility for the accuracy of this information.

ANTENNA GAIN (dBi)

Type	Provided by:	Frequency Range (MHz)	Gain (dBi)
Unknown	Customer	2412-2462	3

The EUT was tested using the power settings provided by the manufacturer:

SETTINGS FOR ALL TESTS IN THIS REPORT

Modulation Types	Channel Bandwidths	Channel	Position	Frequency (MHz)	Power Setting
1 Mbps	20	1	Low Channel	2412	19
		6	Mid Channel	2437	19
		11	High Channel	2462	18
11 Mbps	20	1	Low Channel	2412	19
		6	Mid Channel	2437	19
		11	High Channel	2462	18
6 Mbps	20	1	Low Channel	2412	18
		6	Mid Channel	2437	18
		11	High Channel	2462	12.5
36 Mbps	20	1	Low Channel	2412	17
		6	Mid Channel	2437	17
		11	High Channel	2462	12.5
54 Mbps	20	1	Low Channel	2412	14
		6	Mid Channel	2437	16
		11	High Channel	2462	12.5
MCS0	20	1	Low Channel	2412	18
		6	Mid Channel	2437	18
		11	High Channel	2462	11.5
MCS7	20	1	Low Channel	2412	16
		6	Mid Channel	2437	16
		11	High Channel	2462	11.5

DUTY CYCLE



XMit 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Keysight	N5182B	TFX	28-Apr-20	28-Apr-23
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	10-Feb-20	10-Feb-21
Block - DC	Fairview Microwave	SD3379	AMI	5-Aug-20	5-Aug-21
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	21-Dec-19	21-Dec-20

TEST DESCRIPTION

The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

DUTY CYCLE



TMFTx 2019.08.30.0 XMR 2020.03.25.0


EUT: USB to WiFi Adapter		Work Order: TRNE0022				
Serial Number: 0022A301FF5D		Date: 24-Aug-20				
Customer: Trane		Temperature: 22 °C				
Attendees: Chris Vanderkoy		Humidity: 57.2% RH				
Project: None		Barometric Pres.: 1017 mbar				
Tested by: Dustin Sparks		Power: 5VDC via USB				
Job Site: MN08						
TEST SPECIFICATIONS		Test Method				
FCC 15.247:2020		ANSI C63.10:2013				
COMMENTS						
Measurement cable, DC block, and 20 dB attenuator included in reference level offset.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	3	Signature <i>Dustin Sparks</i>				
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
2400 MHz - 2483.5 MHz Band						
802.11(b) 1 Mbps						
Low Channel 1, 2412 MHz	12.208 ms	12.3 ms	1	99.3	N/A	N/A
Low Channel 1, 2412 MHz	N/A	N/A	5	N/A	N/A	N/A
Mid Channel 6, 2437 MHz	12.2 ms	12.297 ms	1	99.2	N/A	N/A
Mid Channel 6, 2437 MHz	N/A	N/A	6	N/A	N/A	N/A
High Channel 11, 2462 MHz	12.208 ms	12.298 ms	1	99.3	N/A	N/A
High Channel 11, 2462 MHz	N/A	N/A	5	N/A	N/A	N/A
802.11(b) 11 Mbps						
Low Channel 1, 2412 MHz	1.188 ms	1.272 ms	1	93.4	N/A	N/A
Low Channel 1, 2412 MHz	N/A	N/A	6	N/A	N/A	N/A
Mid Channel 6, 2437 MHz	1.188 ms	1.277 ms	1	93	N/A	N/A
Mid Channel 6, 2437 MHz	N/A	N/A	6	N/A	N/A	N/A
High Channel 11, 2462 MHz	1.186 ms	1.274 ms	1	93.2	N/A	N/A
High Channel 11, 2462 MHz	N/A	N/A	6	N/A	N/A	N/A
802.11(g) 6 Mbps						
Low Channel 1, 2412 MHz	2.028 ms	2.118 ms	1	95.8	N/A	N/A
Low Channel 1, 2412 MHz	N/A	N/A	5	N/A	N/A	N/A
Mid Channel 6, 2437 MHz	2.028 ms	2.124 ms	1	95.5	N/A	N/A
Mid Channel 6, 2437 MHz	N/A	N/A	6	N/A	N/A	N/A
High Channel 11, 2462 MHz	2.028 ms	2.12 ms	1	95.7	N/A	N/A
High Channel 11, 2462 MHz	N/A	N/A	5	N/A	N/A	N/A
802.11(g) 36 Mbps						
Low Channel 1, 2412 MHz	355.7 us	473.1 us	1	75.2	N/A	N/A
Low Channel 1, 2412 MHz	N/A	N/A	6	N/A	N/A	N/A
Mid Channel 6, 2437 MHz	355.6 us	451 us	1	78.8	N/A	N/A
Mid Channel 6, 2437 MHz	N/A	N/A	5	N/A	N/A	N/A
High Channel 11, 2462 MHz	355.7 us	445.3 us	1	79.9	N/A	N/A
High Channel 11, 2462 MHz	N/A	N/A	5	N/A	N/A	N/A
802.11(g) 54 Mbps						
Low Channel 1, 2412 MHz	243.6 us	334 us	1	72.9	N/A	N/A
Low Channel 1, 2412 MHz	N/A	N/A	5	N/A	N/A	N/A
Mid Channel 6, 2437 MHz	243.4 us	339 us	1	71.8	N/A	N/A
Mid Channel 6, 2437 MHz	N/A	N/A	5	N/A	N/A	N/A
High Channel 11, 2462 MHz	243.7 us	334.1 us	1	72.9	N/A	N/A
High Channel 11, 2462 MHz	N/A	N/A	5	N/A	N/A	N/A
802.11(n) MCS0						
Low Channel 1, 2412 MHz	1.888 ms	1.984 ms	1	95.2	N/A	N/A
Low Channel 1, 2412 MHz	N/A	N/A	6	N/A	N/A	N/A
Mid Channel 6, 2437 MHz	1.885 ms	1.984 ms	1	95.1	N/A	N/A
Mid Channel 6, 2437 MHz	N/A	N/A	5	N/A	N/A	N/A
High Channel 11, 2462 MHz	1.888 ms	1.978 ms	1	95.5	N/A	N/A
High Channel 11, 2462 MHz	N/A	N/A	6	N/A	N/A	N/A
802.11(n) MCS7						
Low Channel 1, 2412 MHz	223.7 us	319.5 us	1	70	N/A	N/A
Low Channel 1, 2412 MHz	N/A	N/A	5	N/A	N/A	N/A
Mid Channel 6, 2437 MHz	223.6 us	319.5 us	1	70	N/A	N/A
Mid Channel 6, 2437 MHz	N/A	N/A	5	N/A	N/A	N/A
High Channel 11, 2462 MHz	223.7 us	313.7 us	1	71.3	N/A	N/A
High Channel 11, 2462 MHz	N/A	N/A	6	N/A	N/A	N/A

DUTY CYCLE




TMX 2019.08.30.0 XMR 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
12.208 ms	12.3 ms	1	99.3	N/A	N/A	

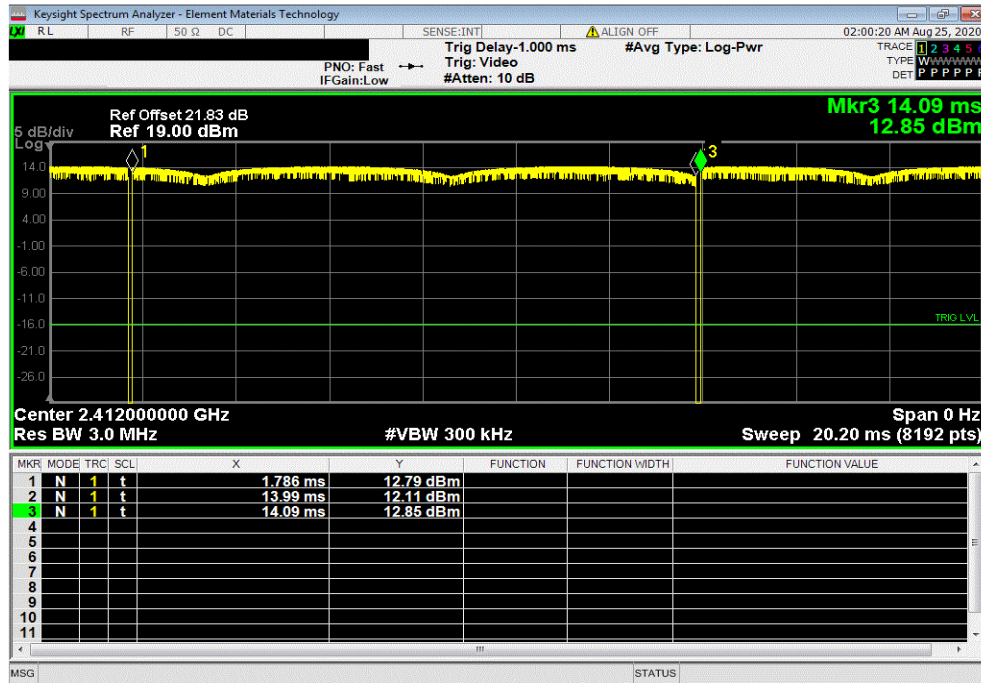

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

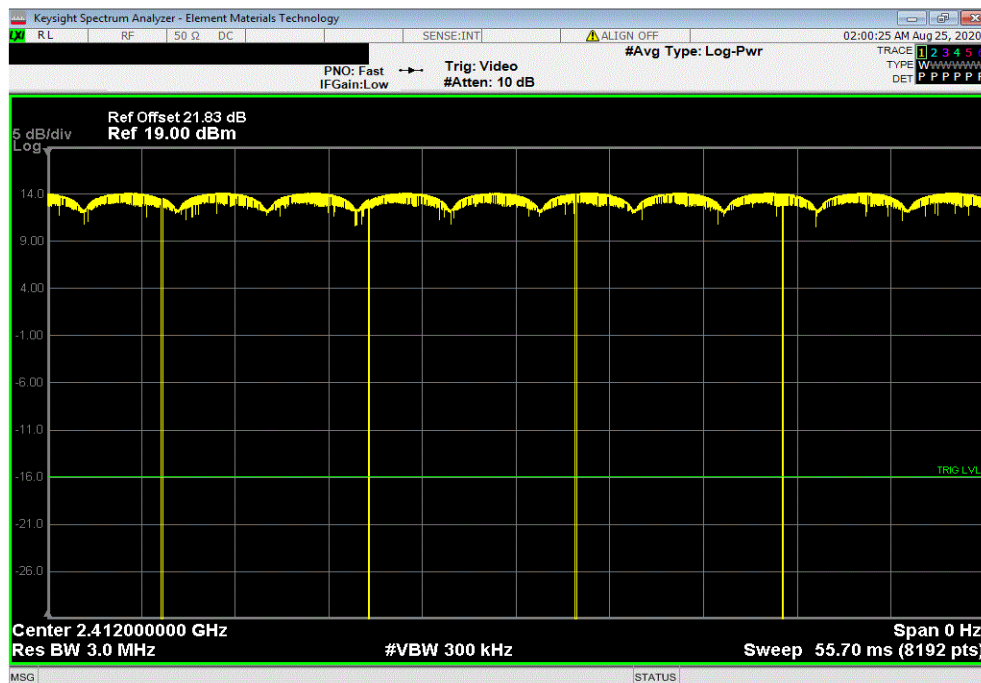


DUTY CYCLE




TMX 2019.08.30.0 XM 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
12.2 ms	12.297 ms	1	99.2	N/A	N/A	

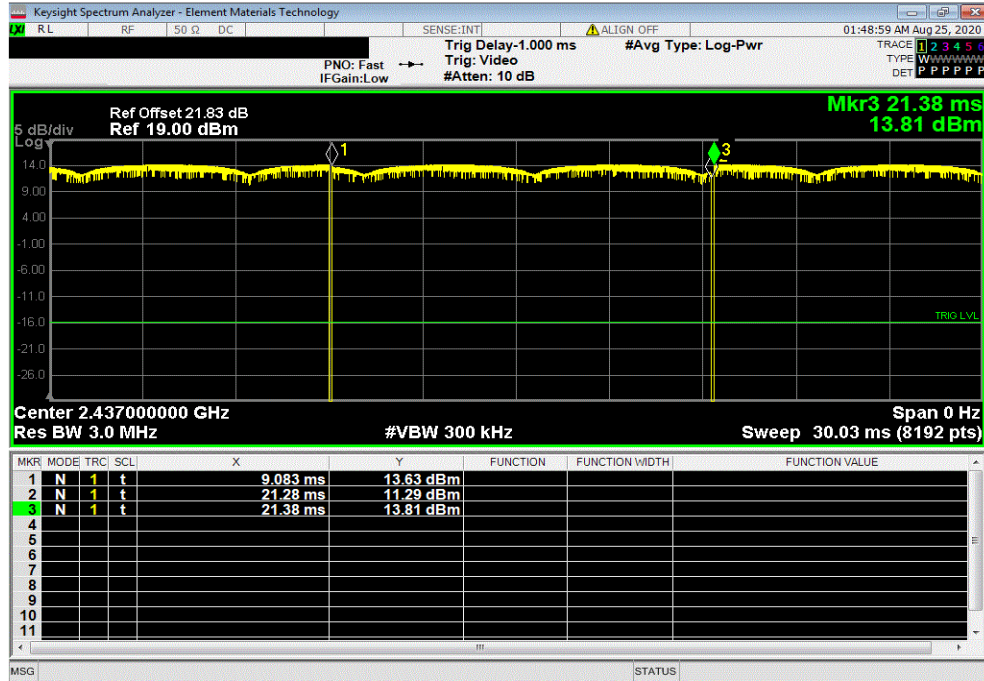

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

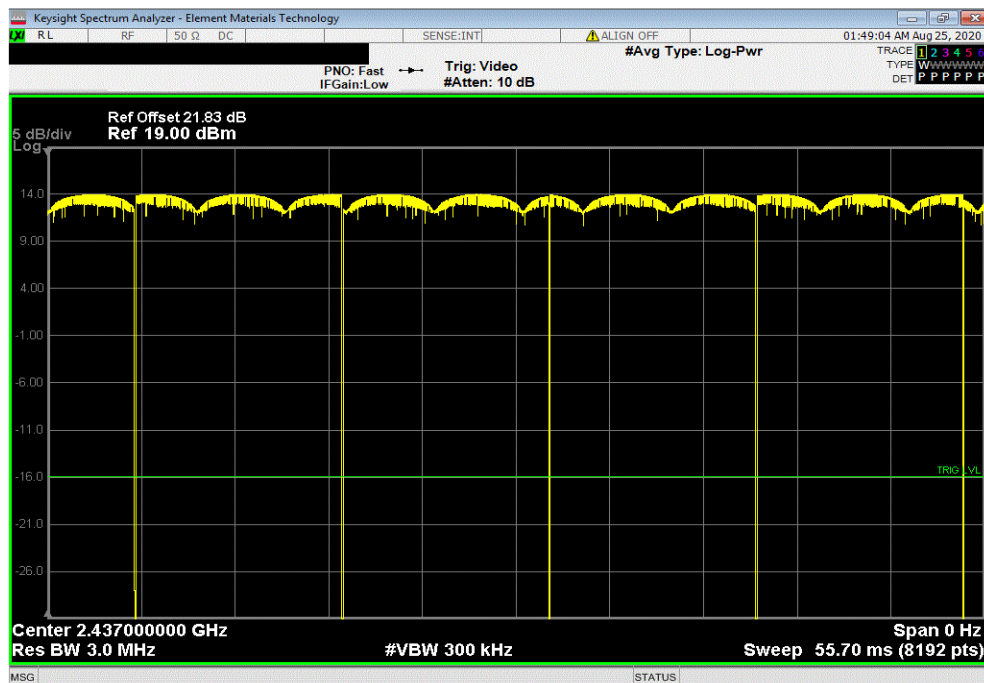


DUTY CYCLE




TMTx 2019.08.30.0 XMt 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
12.208 ms	12.298 ms	1	99.3	N/A	N/A	

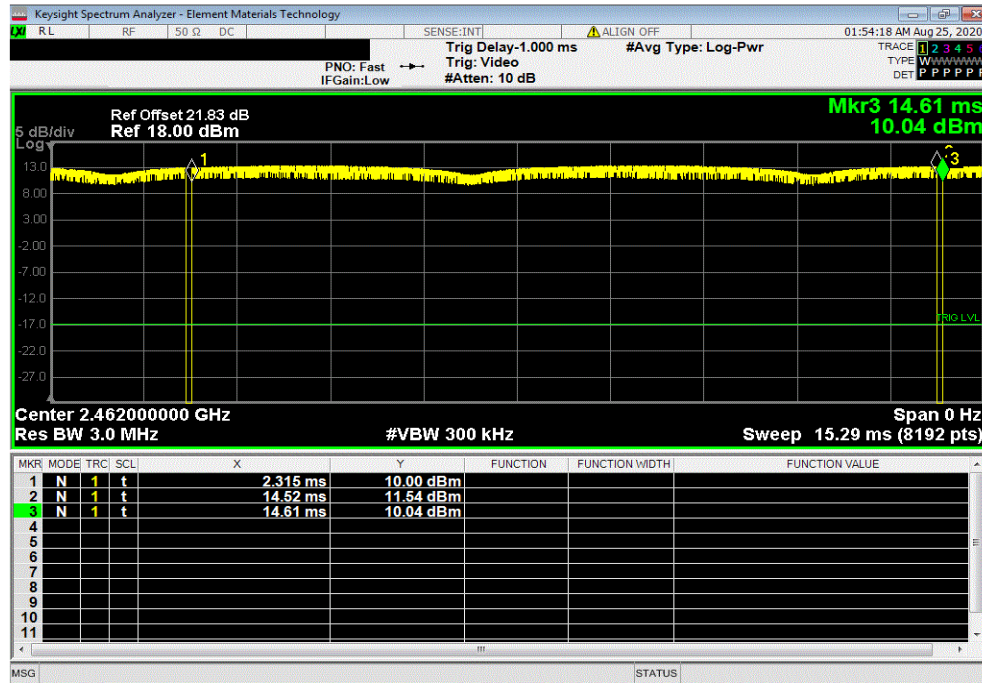

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

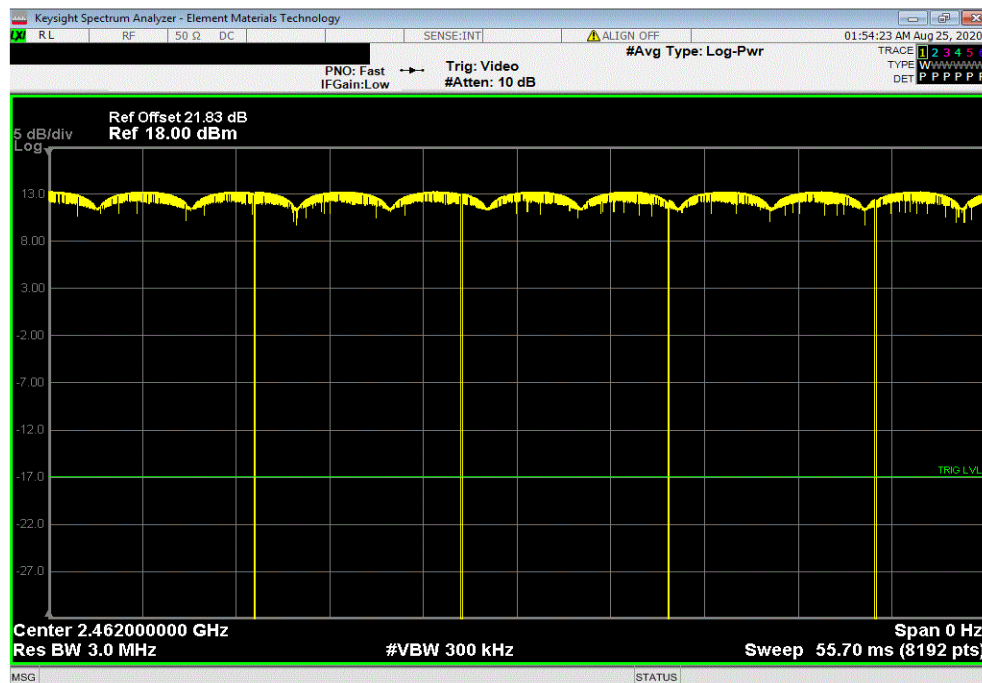


DUTY CYCLE




TMX 2019.08.30.0 XM8 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
1.188 ms	1.272 ms	1	93.4	N/A	N/A	

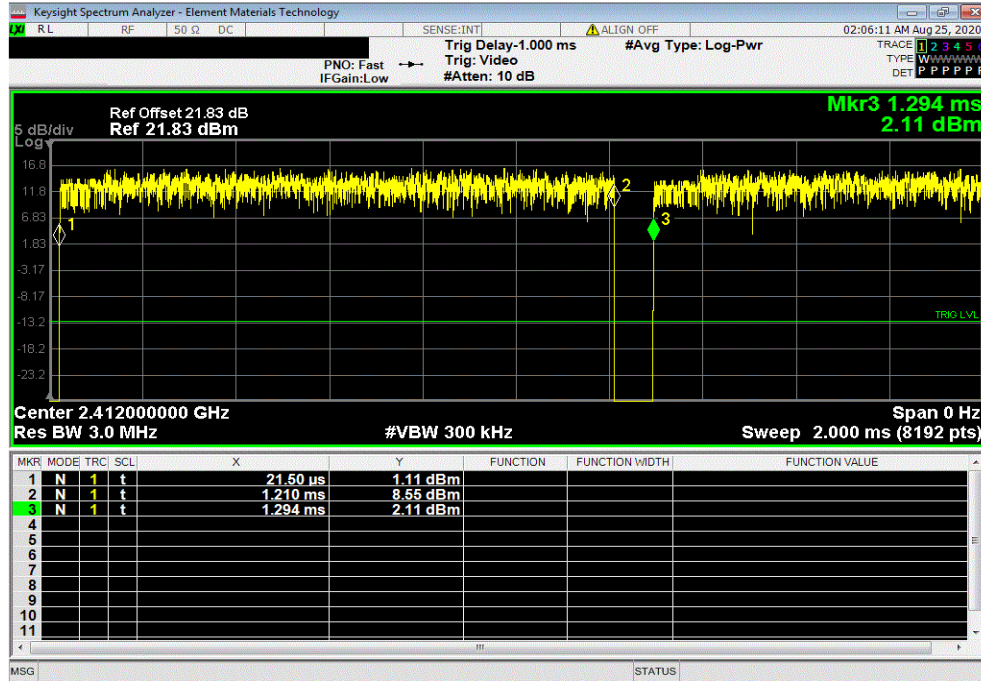

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

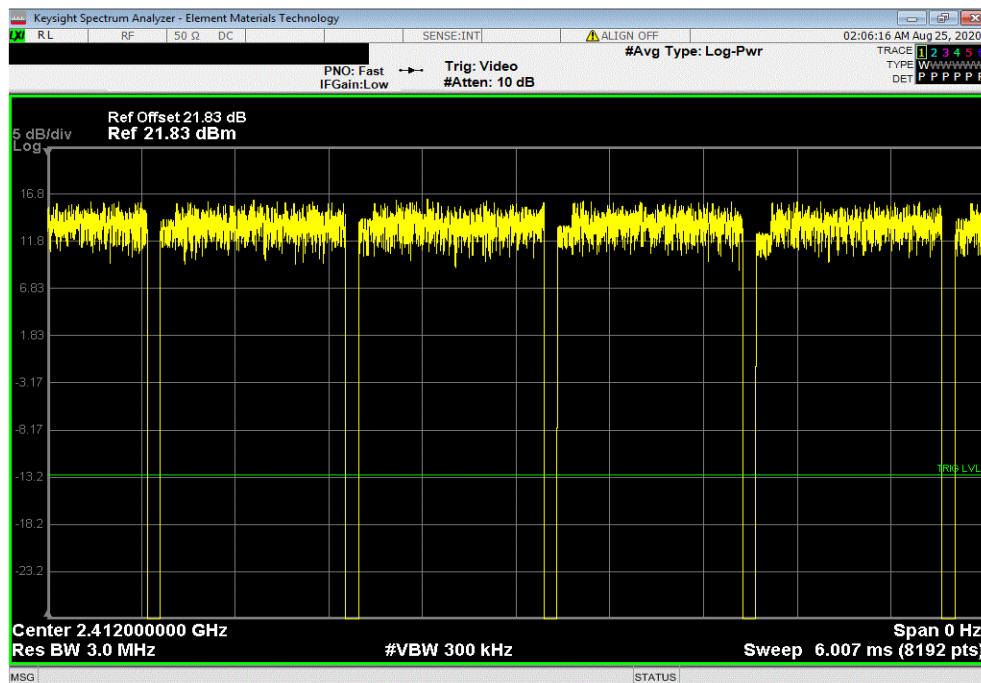


DUTY CYCLE




TMX 2019.08.30.0 XM 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
1.188 ms	1.277 ms	1	93	N/A	N/A	

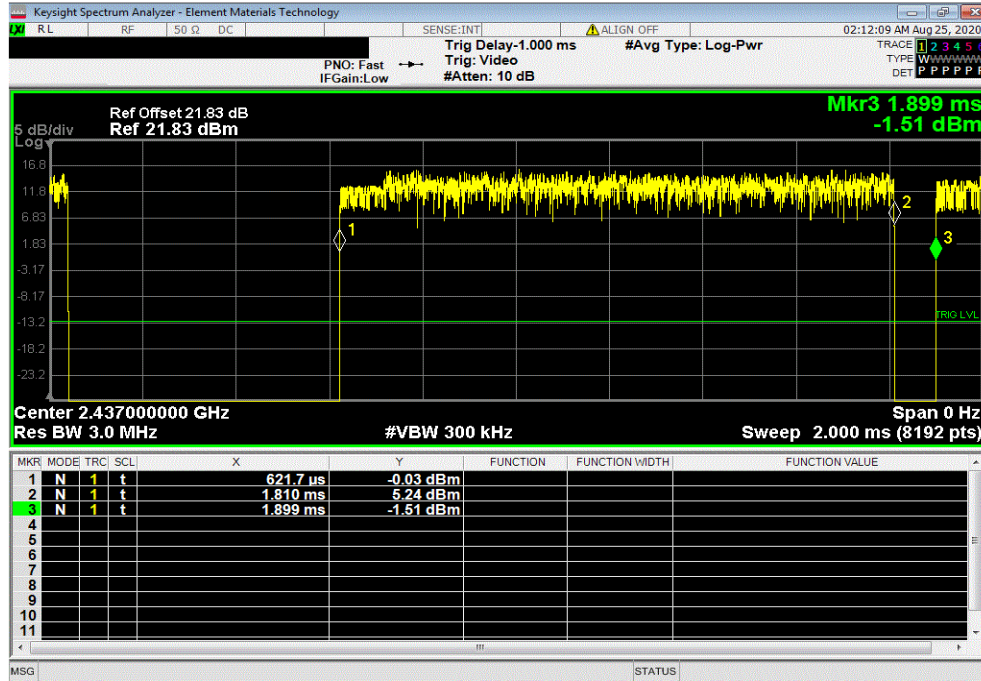

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

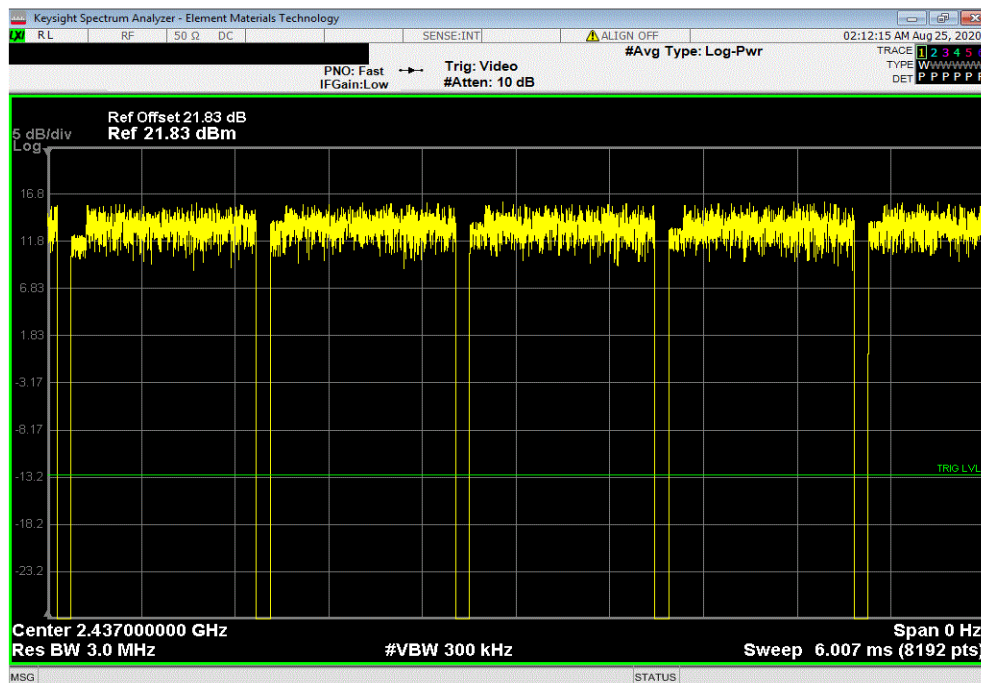


DUTY CYCLE




TMbTx 2019.08.30.0 XMb 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
1.186 ms	1.274 ms	1	93.2	N/A	N/A	

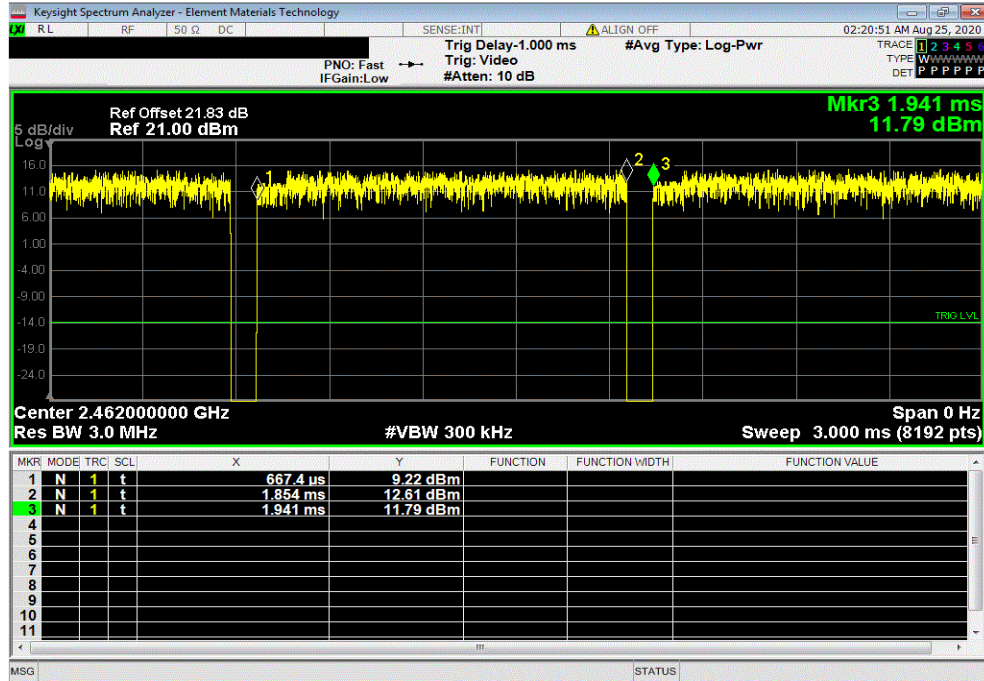

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

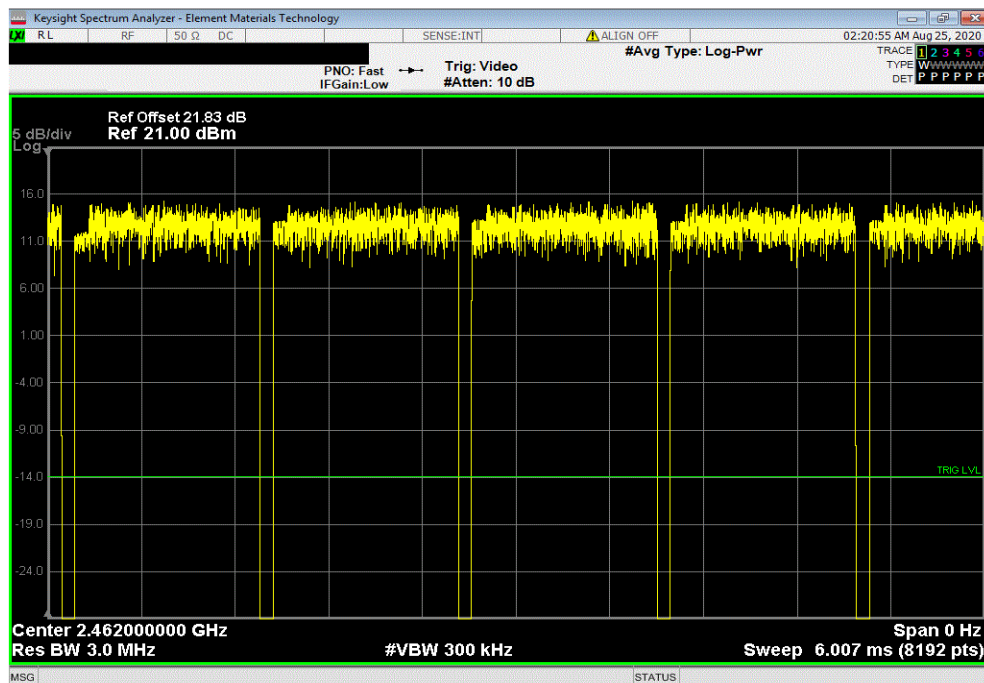


DUTY CYCLE




TMX 2019.08.30.0 XM8 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
2.028 ms	2.118 ms	1	95.8	N/A	N/A	

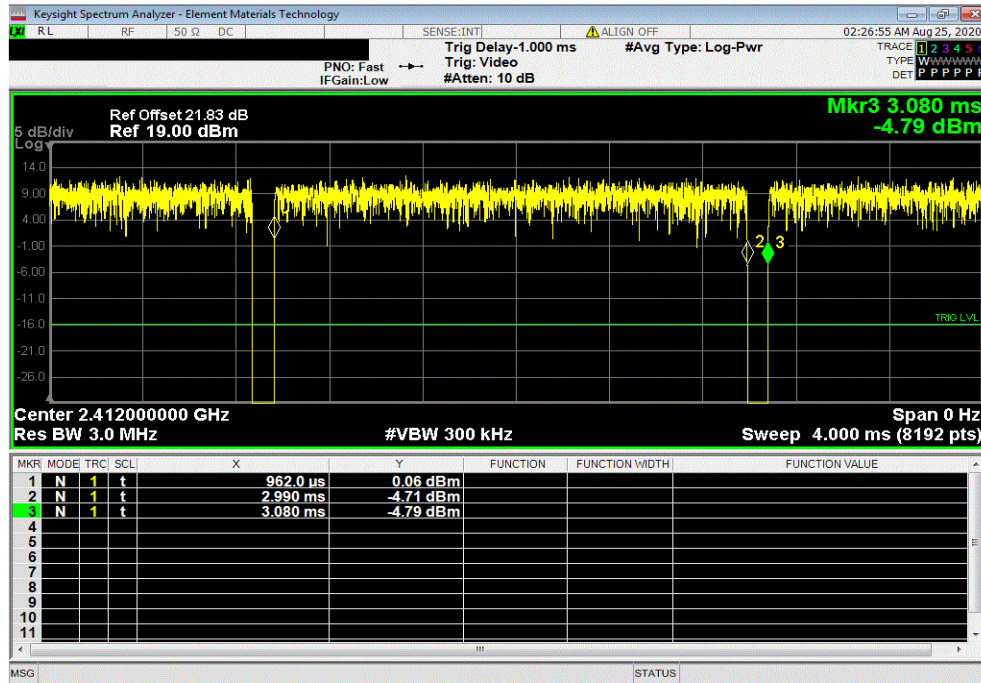

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

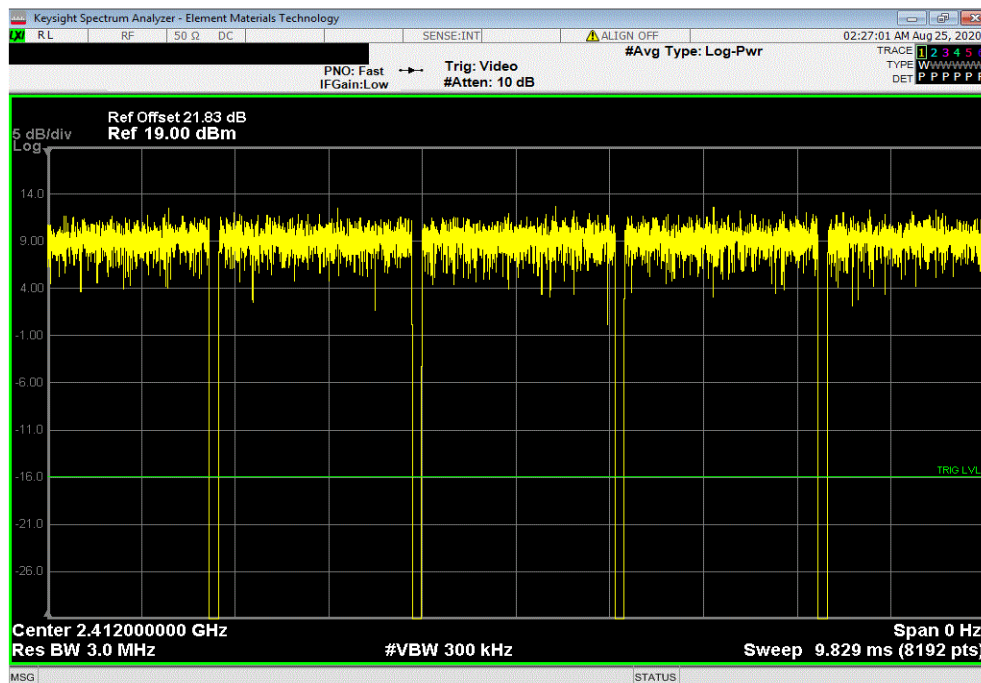


DUTY CYCLE




TMX 2019.08.30.0 XM8 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
2.028 ms	2.124 ms	1	95.5	N/A	N/A	

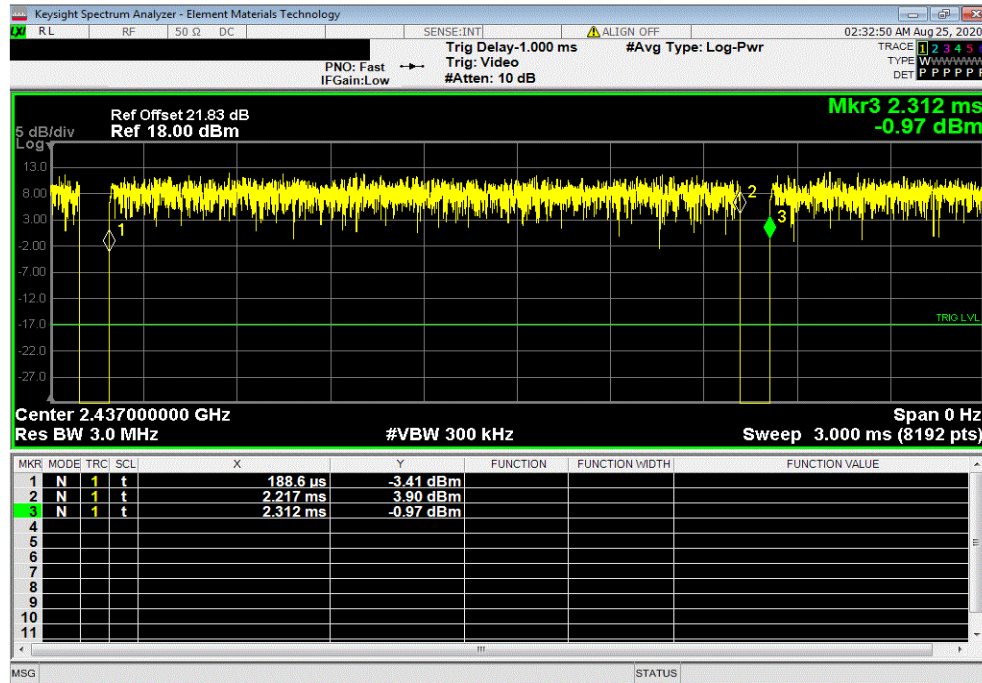

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

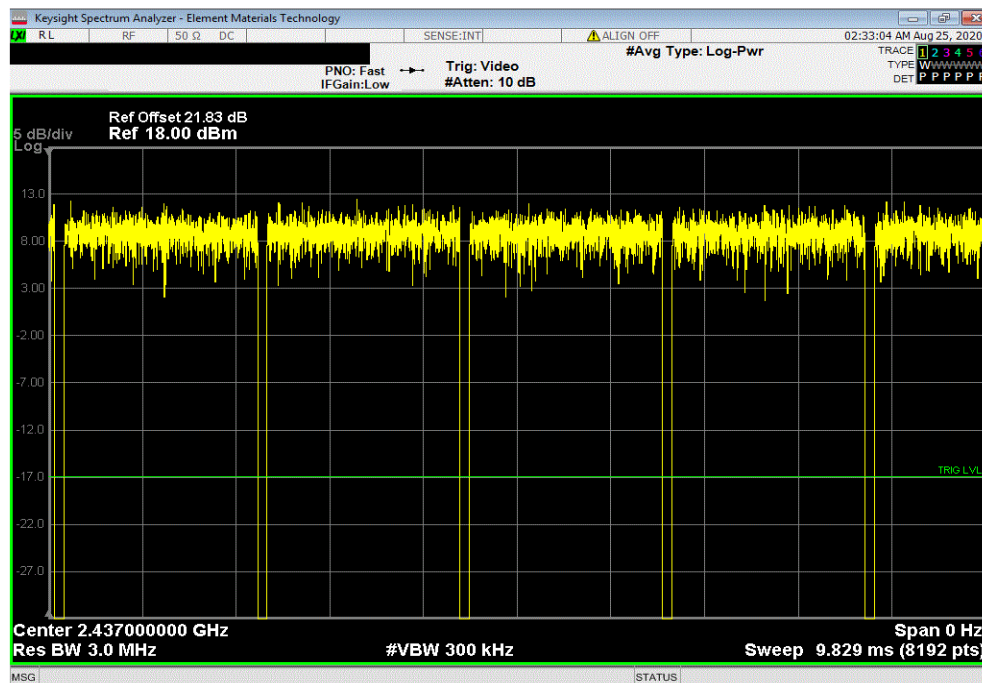


DUTY CYCLE




TMbTx 2019.08.30.0 XMbTx 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
2.028 ms	2.12 ms	1	95.7	N/A	N/A	

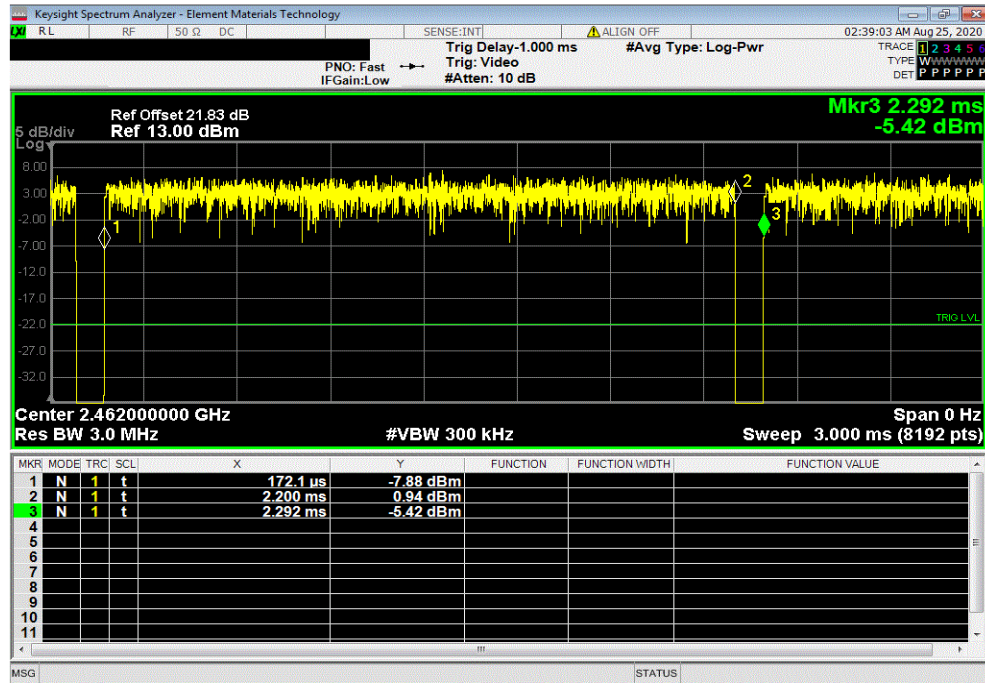

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

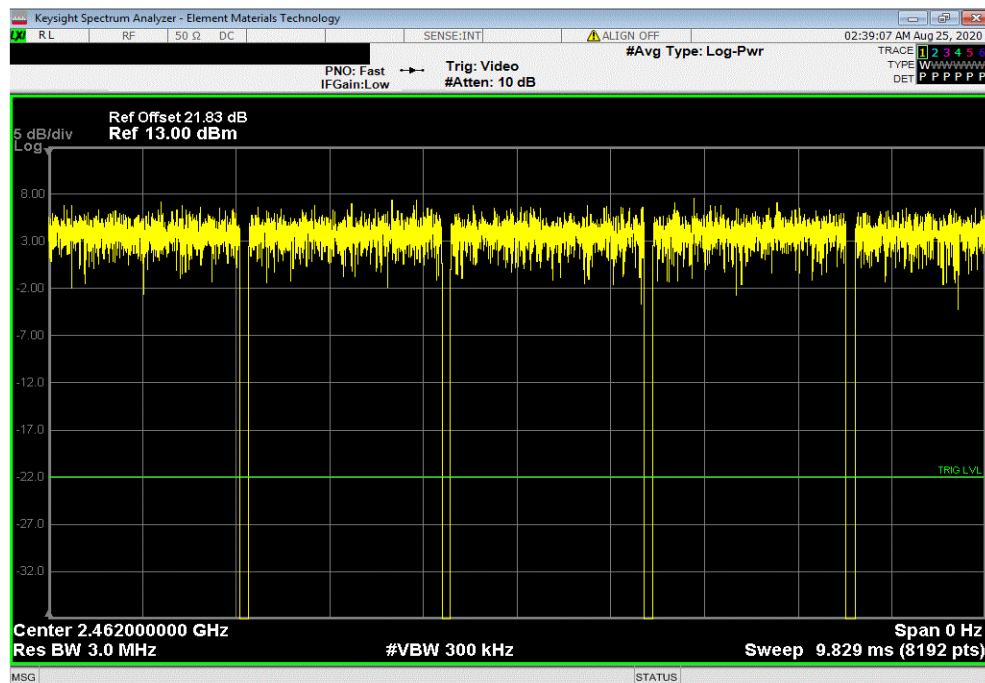


DUTY CYCLE




TMX 2019.08.30.0 XM8 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
355.7 μ s	473.1 μ s	1	75.2	N/A	N/A	

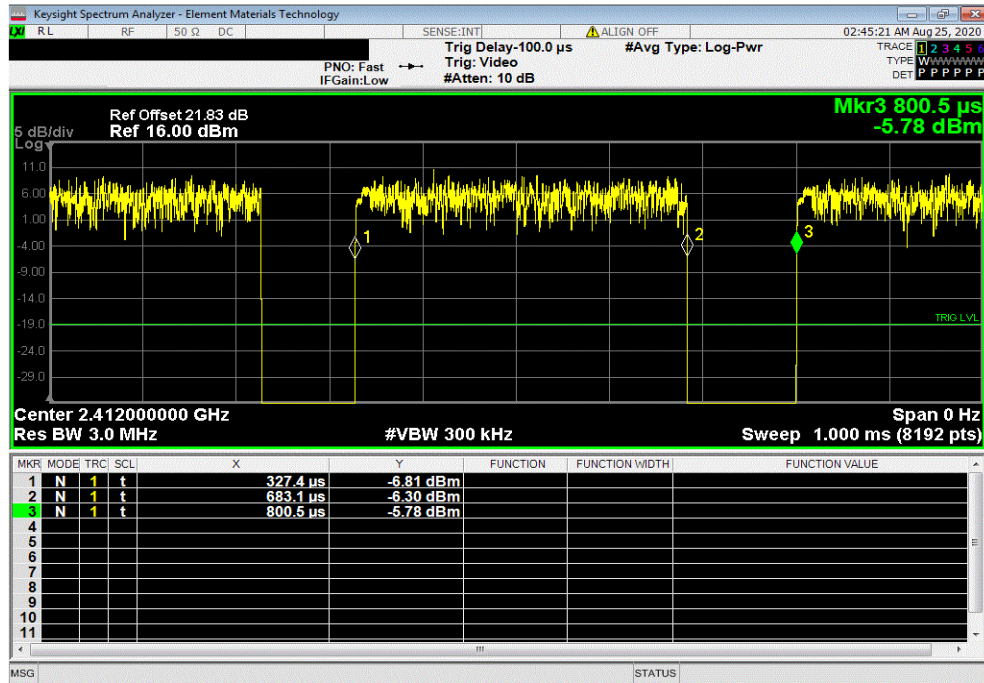

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

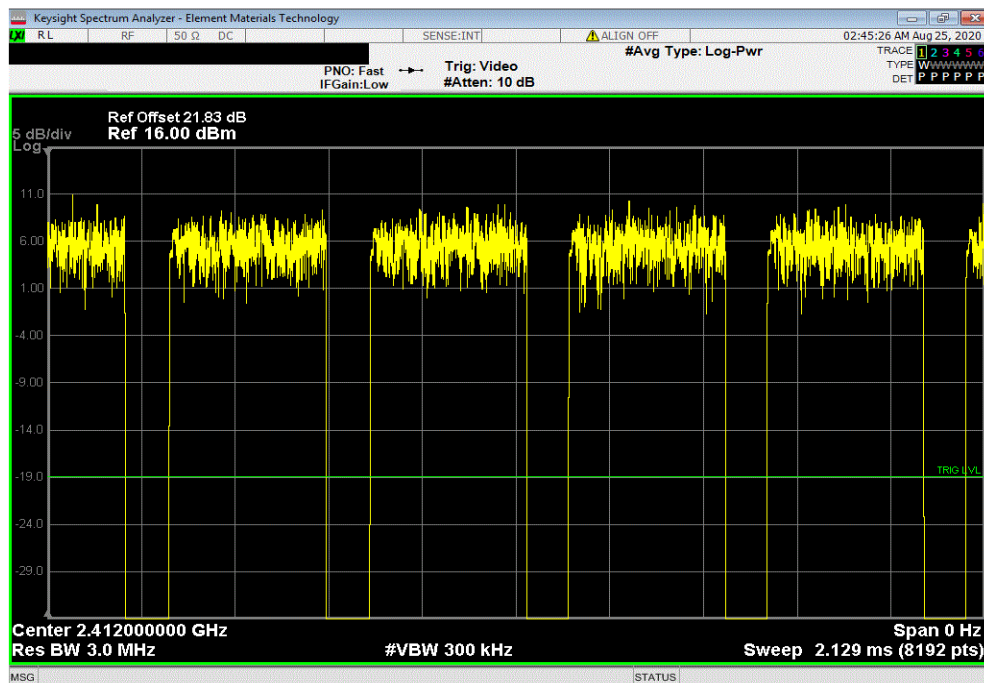


DUTY CYCLE




TMX 2019.08.30.0 XMR 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
355.6 μ s	451 μ s	1	78.8	N/A	N/A	

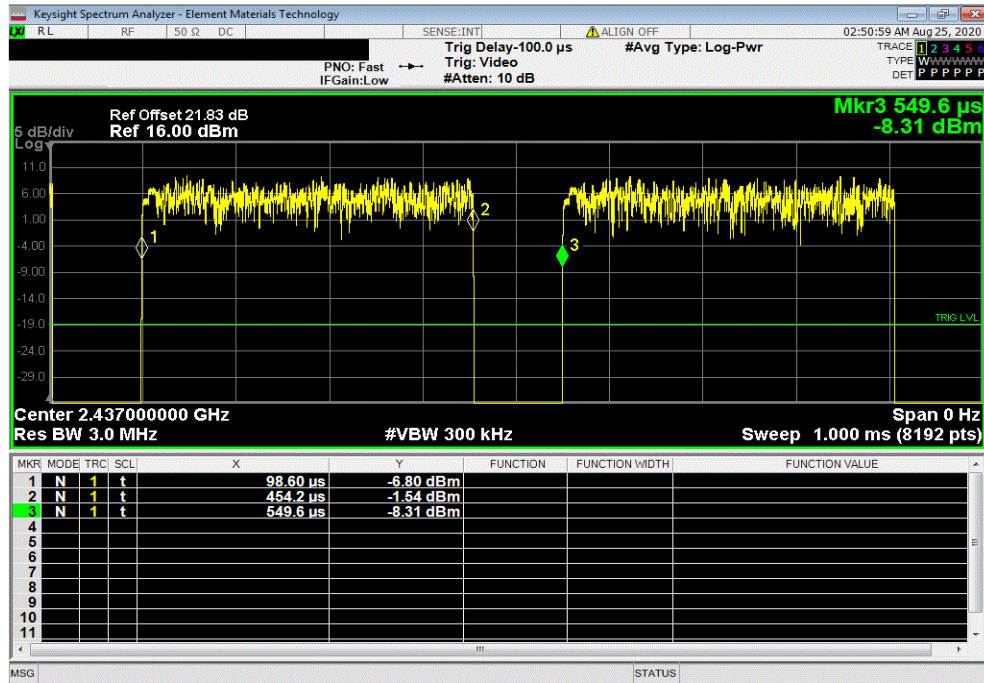

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

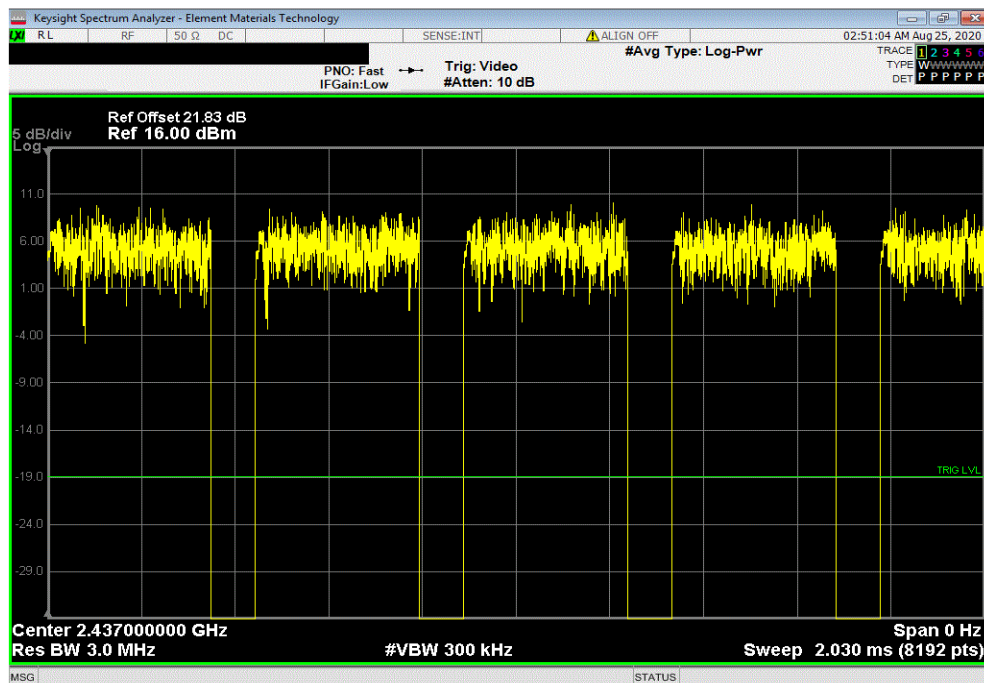


DUTY CYCLE




TMX 2019.08.30.0 XM8 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
355.7 us	445.3 us	1	79.9	N/A	N/A	

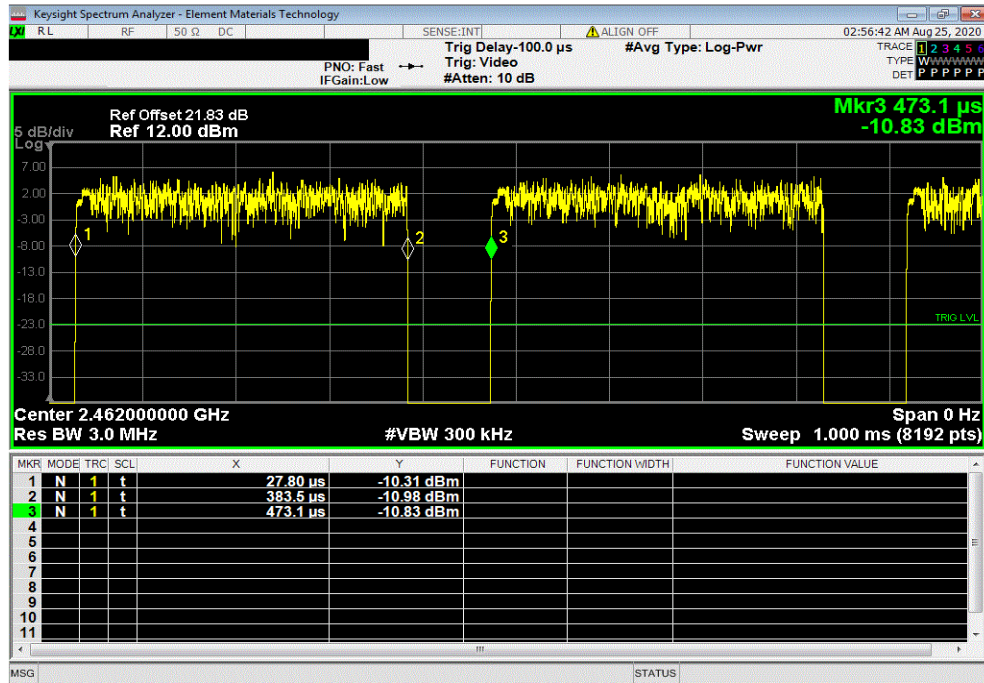

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

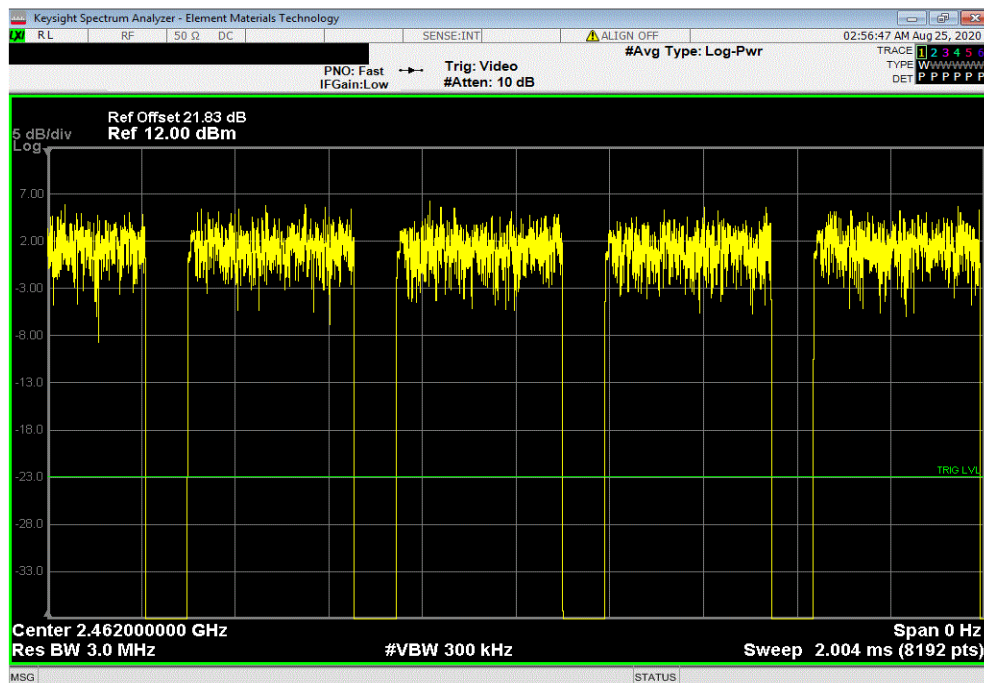


DUTY CYCLE




TMX 2019.08.30.0 XMR 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
243.6 μ s	334 μ s	1	72.9	N/A	N/A	

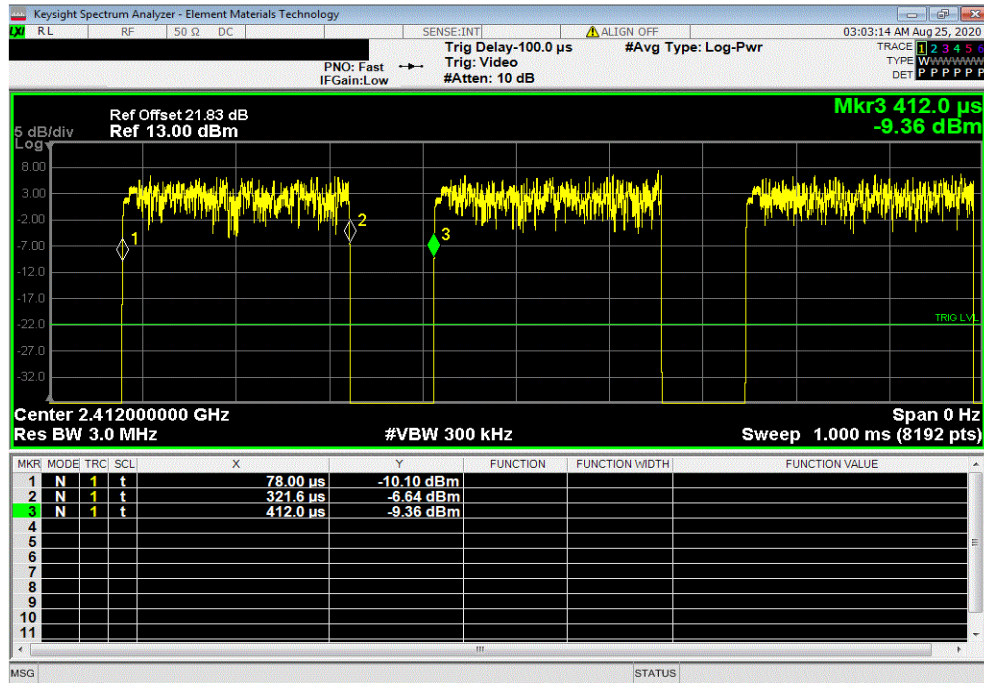

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

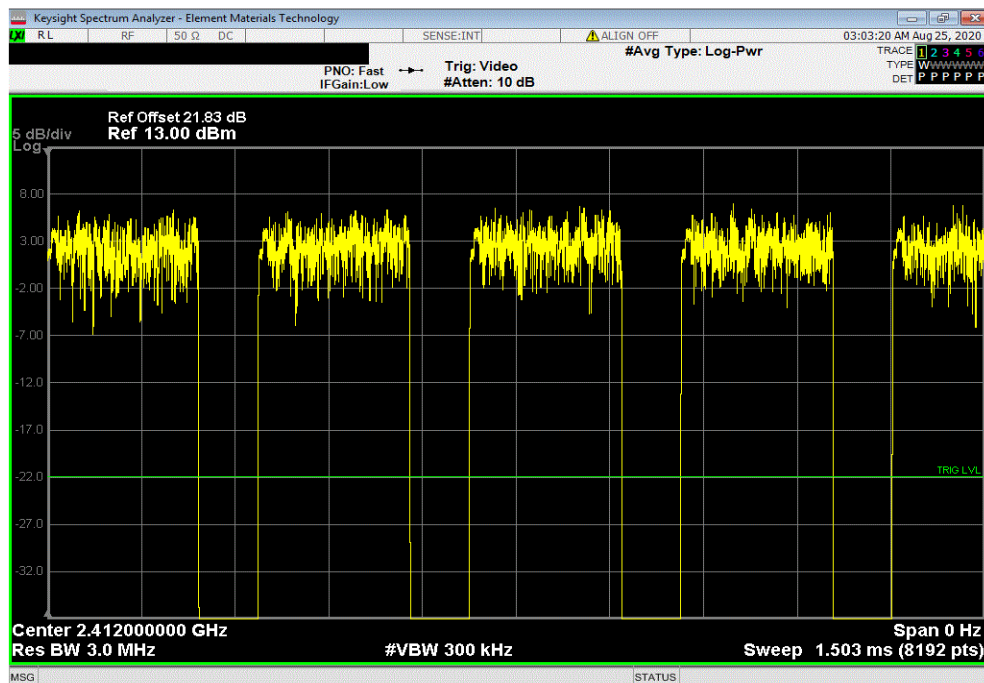


DUTY CYCLE




TMX 2019.08.30.0 XM8 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
243.4 us	339 us	1	71.8	N/A	N/A	

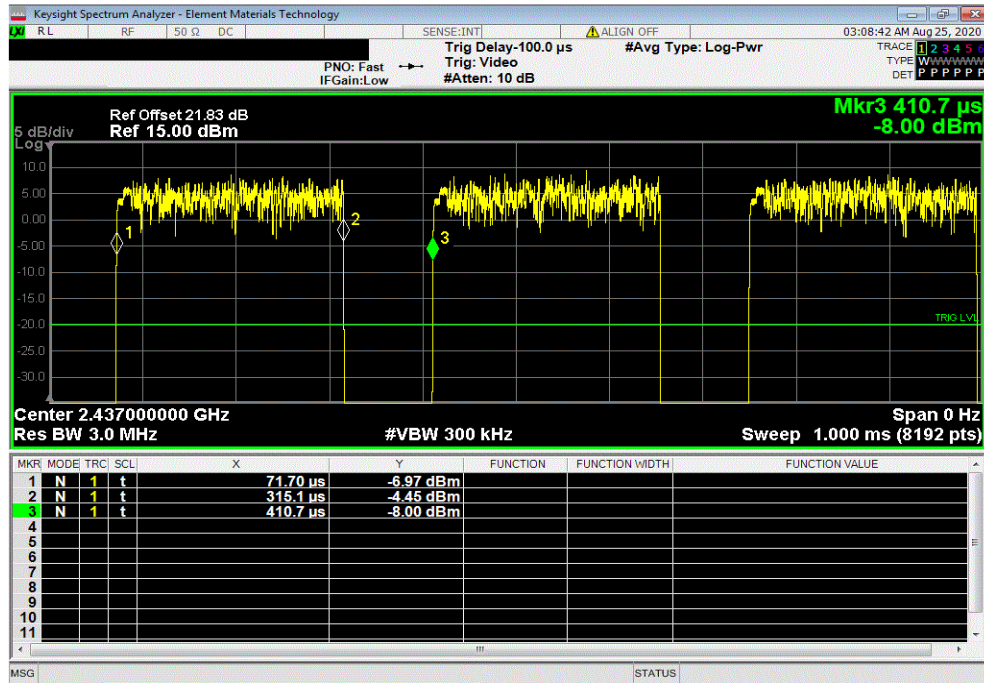

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

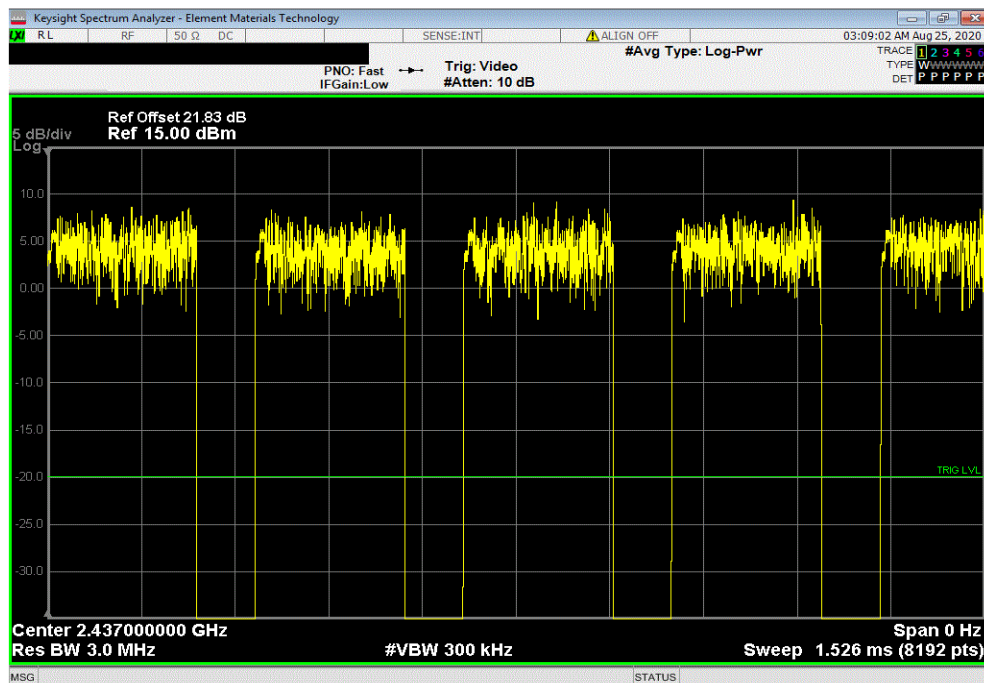


DUTY CYCLE




TMX 2019.08.30.0 XM8 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
243.7 μ s	334.1 μ s	1	72.9	N/A	N/A	

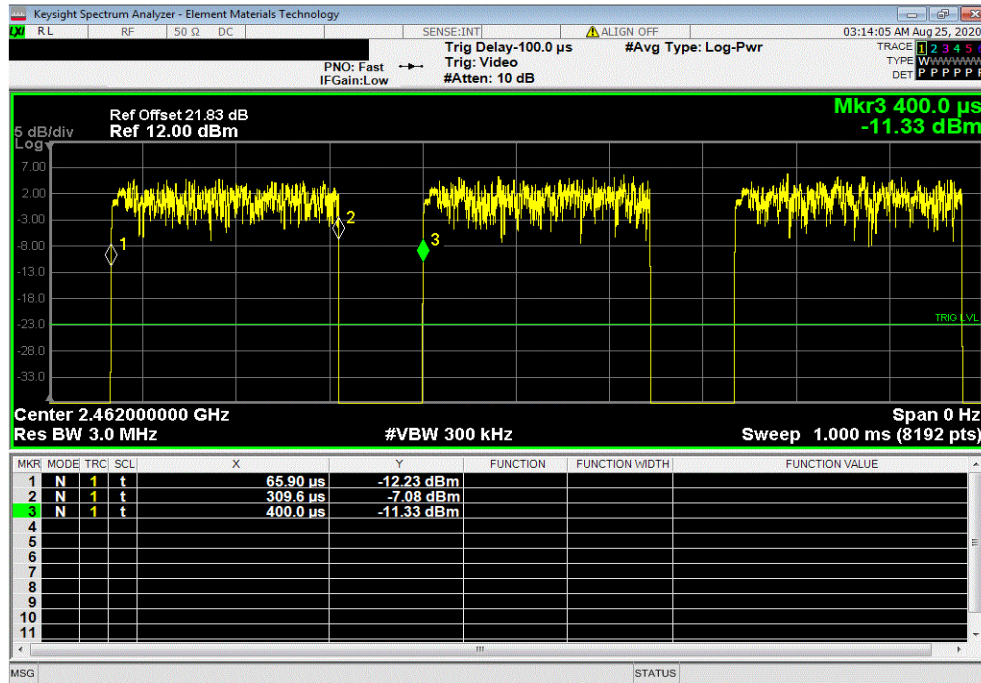

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

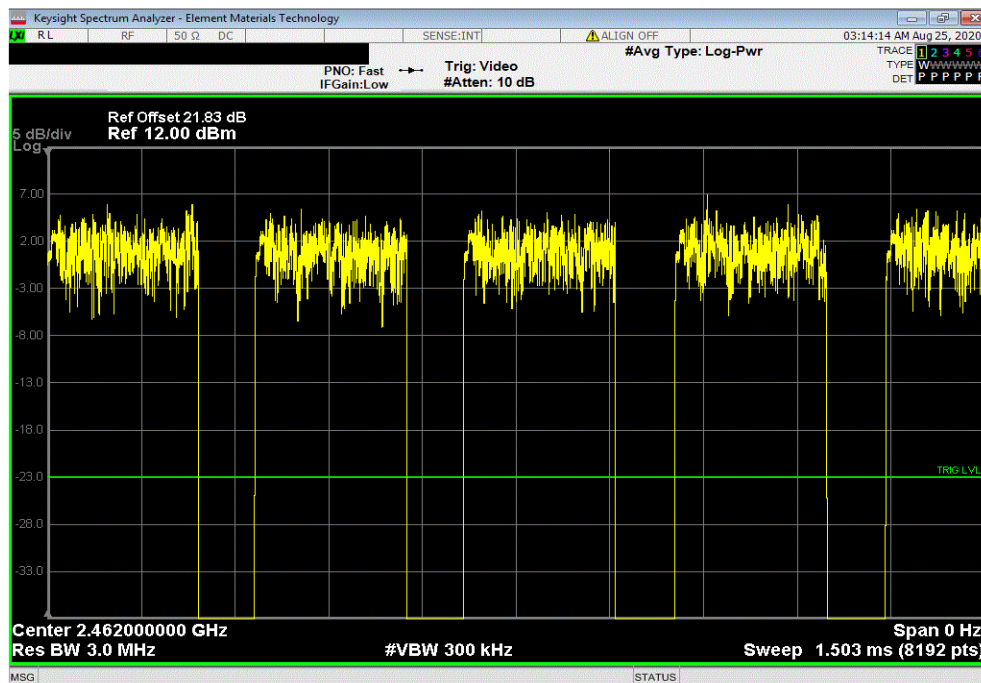


DUTY CYCLE




TMX 2019.08.30.0 XMR 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS0, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
1.888 ms	1.984 ms	1	95.2	N/A	N/A	

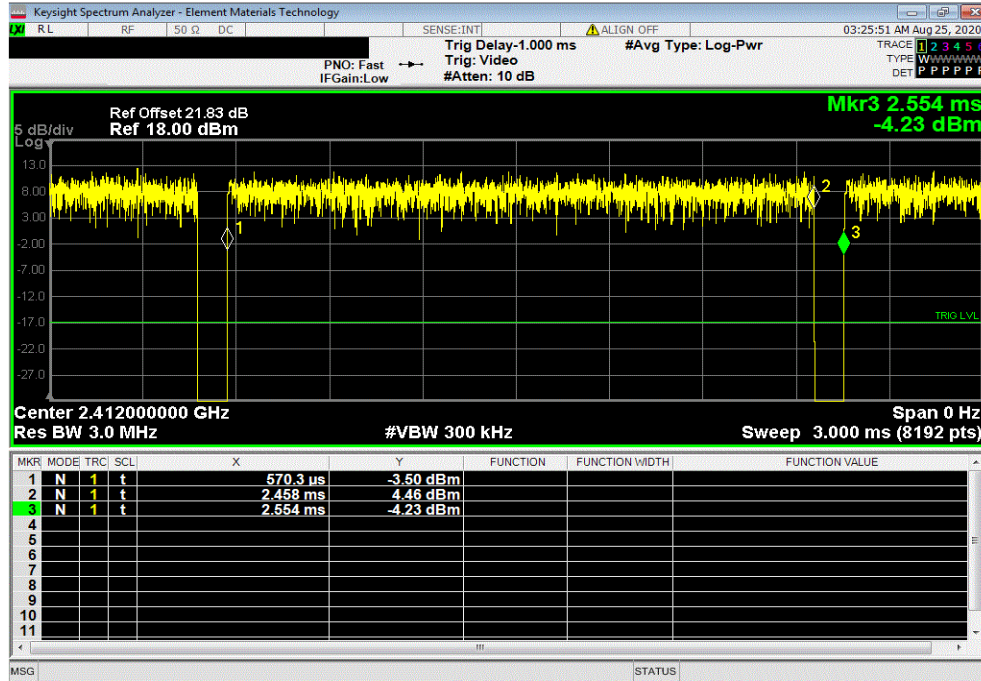

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS0, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

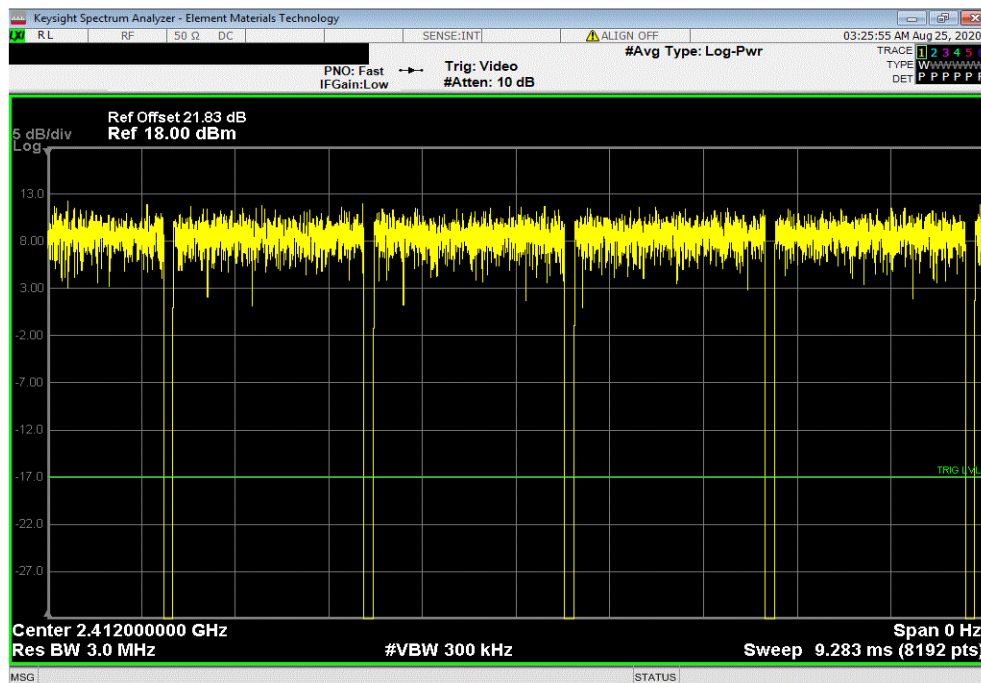


DUTY CYCLE




TbTtx 2019.08.30.0 XMt 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS0, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
1.885 ms	1.984 ms	1	95.1	N/A	N/A	

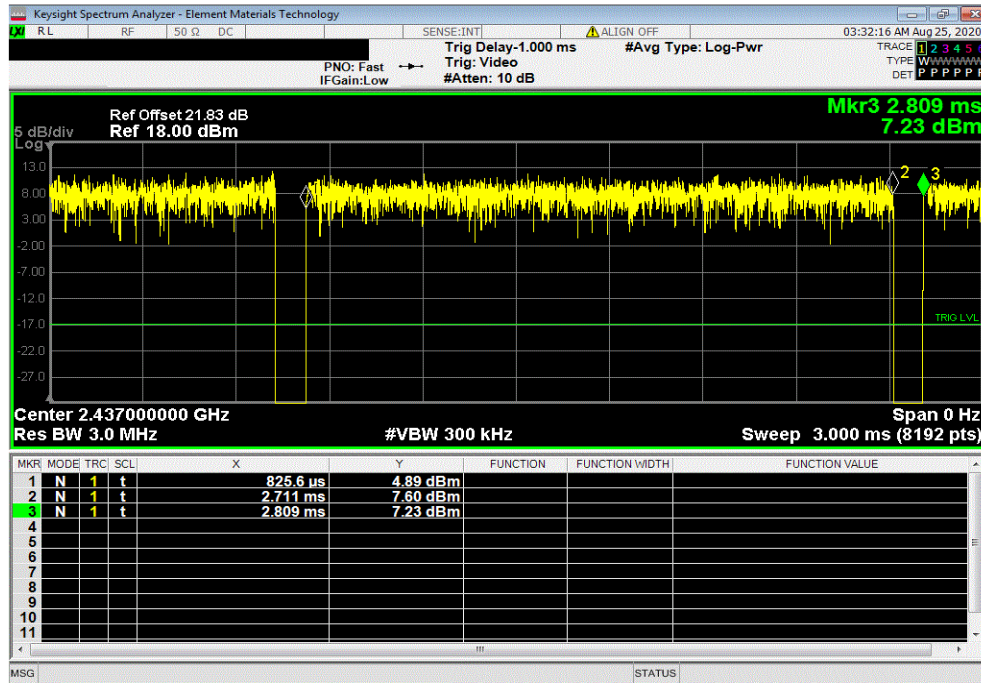

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS0, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

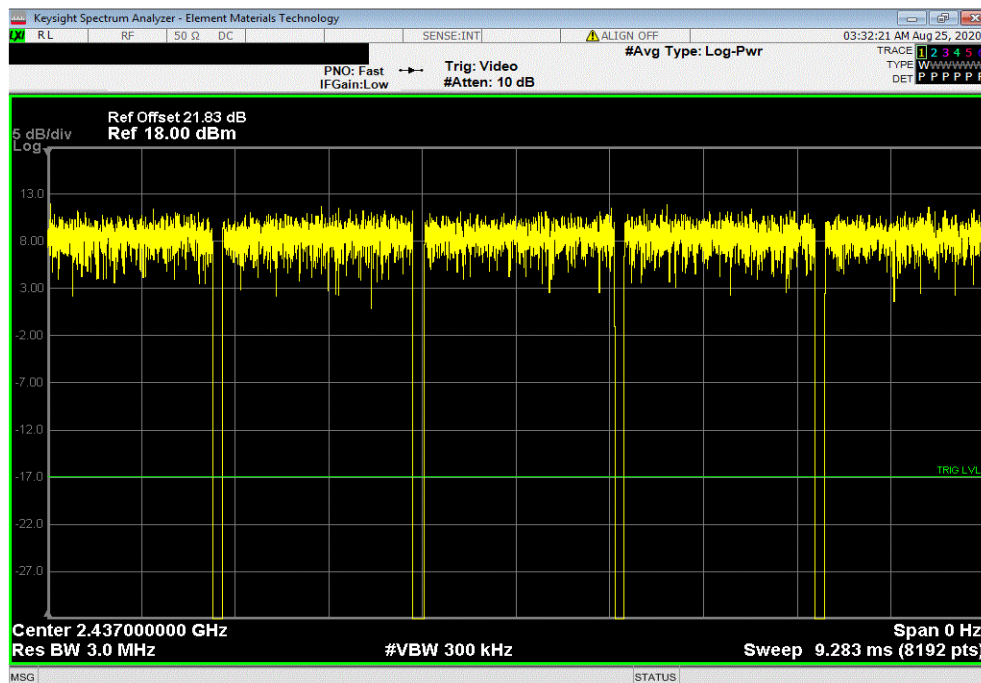


DUTY CYCLE




TMX 2019.08.30.0 XM 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS0, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
1.888 ms	1.978 ms	1	95.5	N/A	N/A	

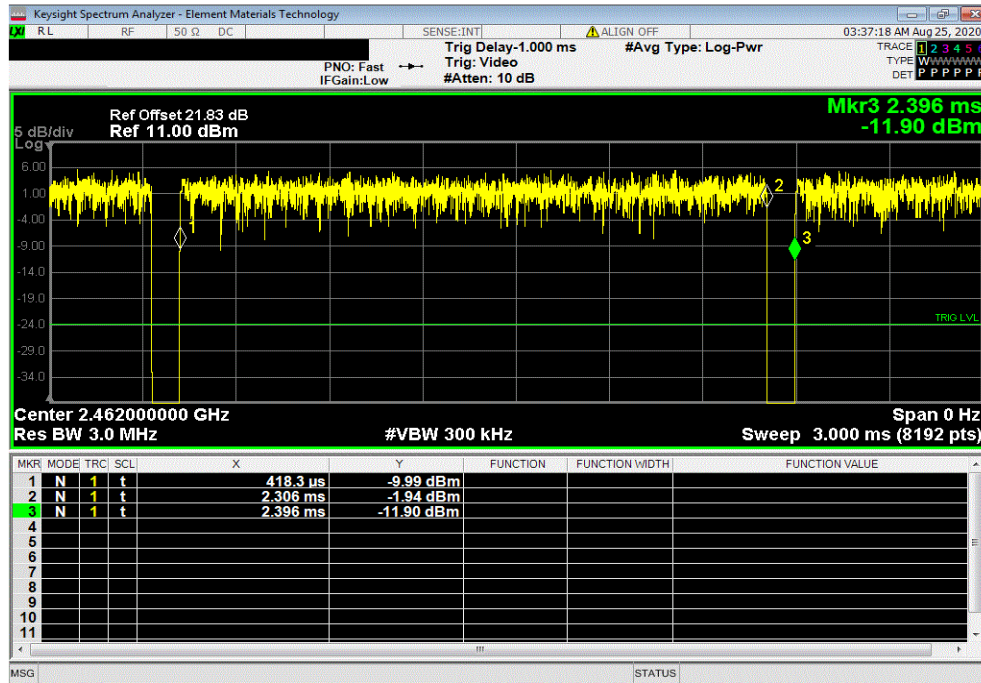

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS0, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

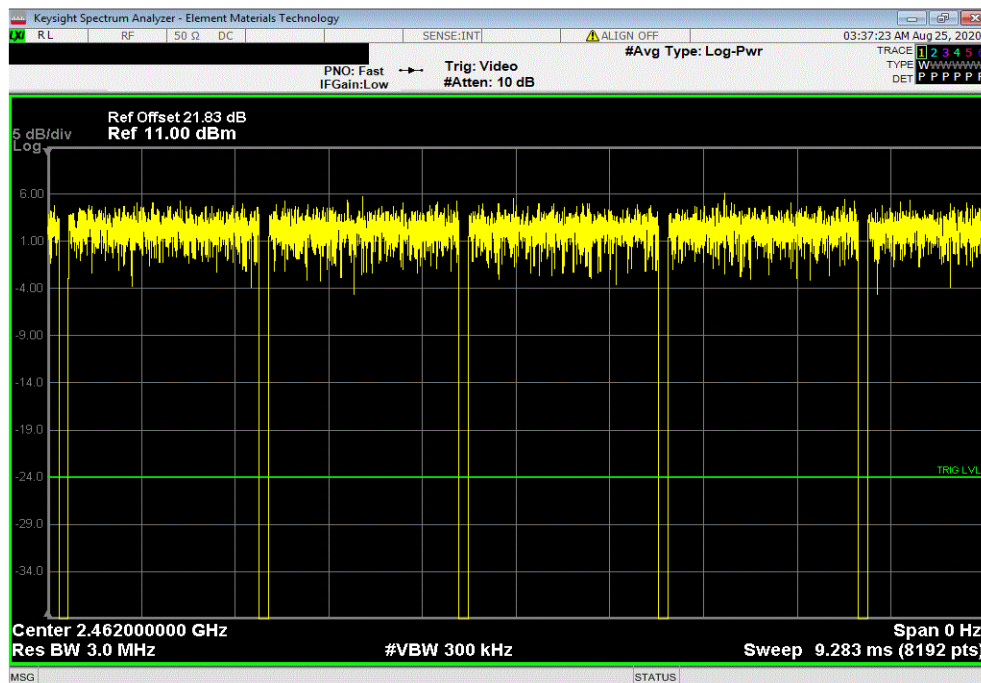


DUTY CYCLE




TMX 2019.08.30.0 XMR 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS7, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
223.7 us	319.5 us	1	70	N/A	N/A	

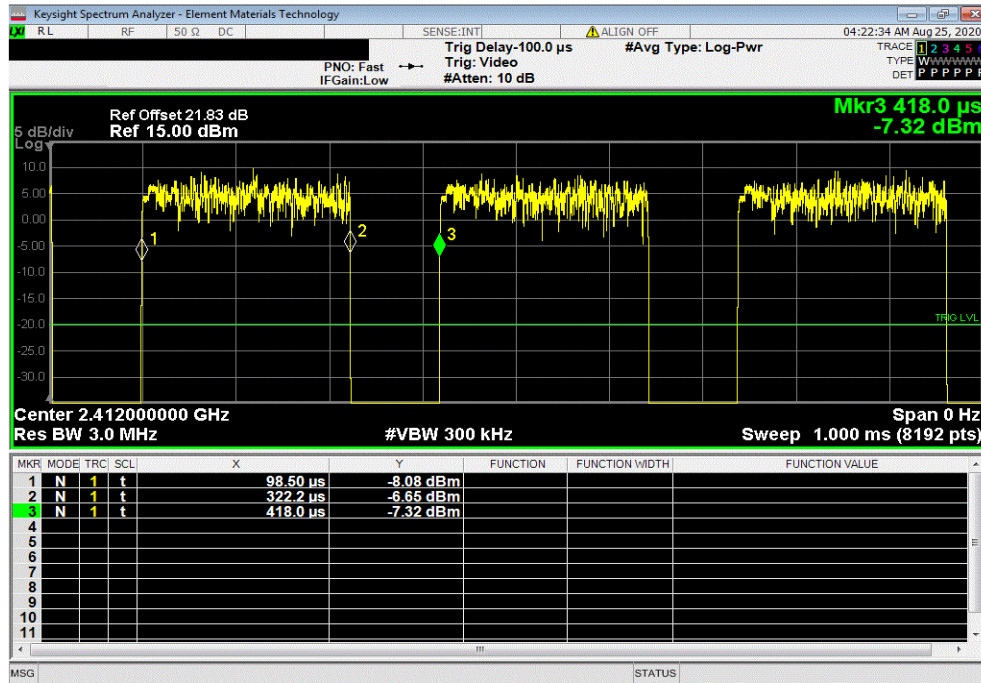

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS7, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

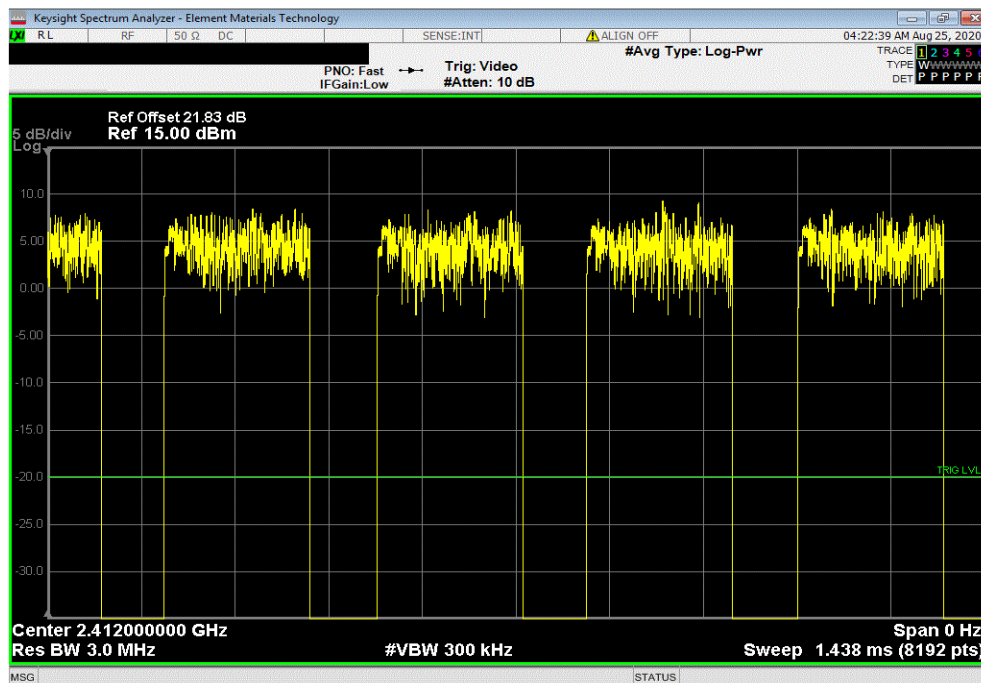


DUTY CYCLE




TMX 2019.08.30.0 XM 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS7, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
223.6 μ s	319.5 μ s	1	70	N/A	N/A	

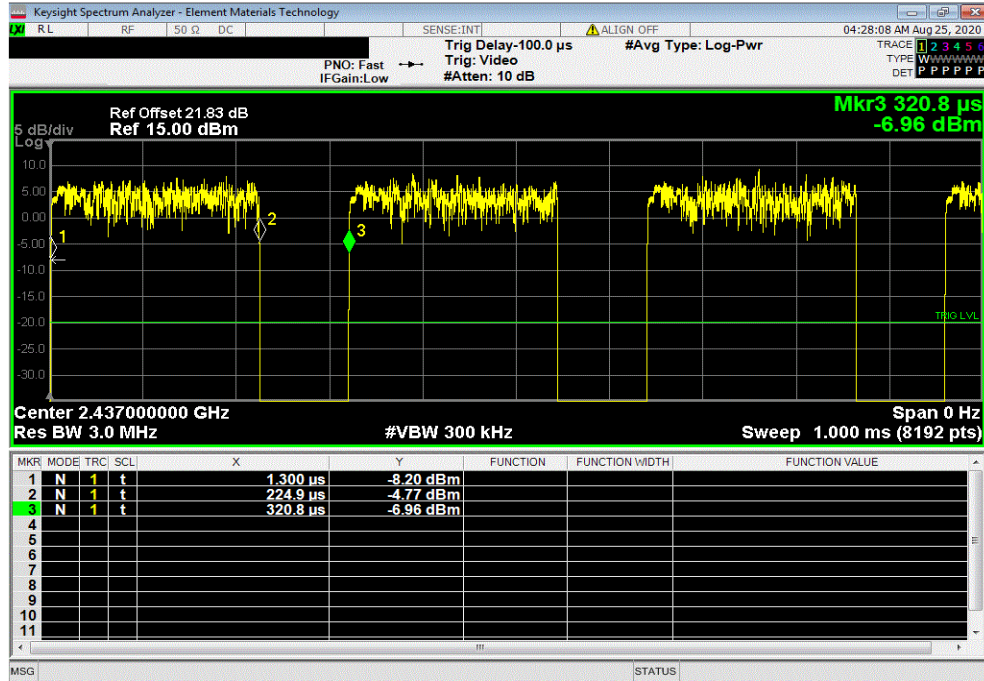

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS7, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

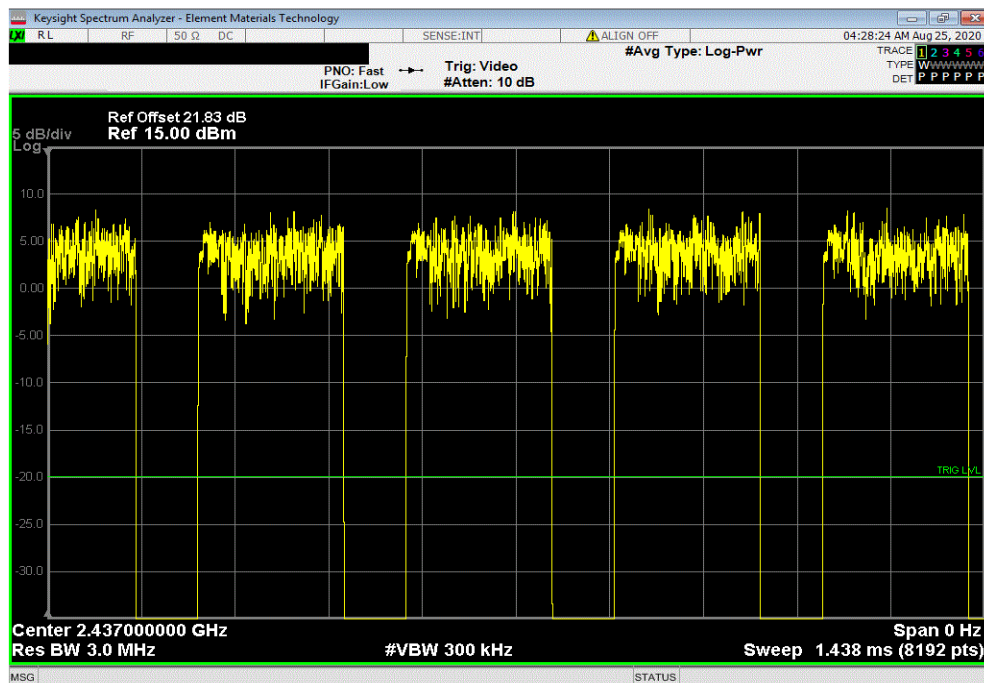


DUTY CYCLE



TMX 2019.08.30.0 XMR 2020.03.25.0

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS7, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
223.7 μ s	313.7 μ s	1	71.3	N/A	N/A	

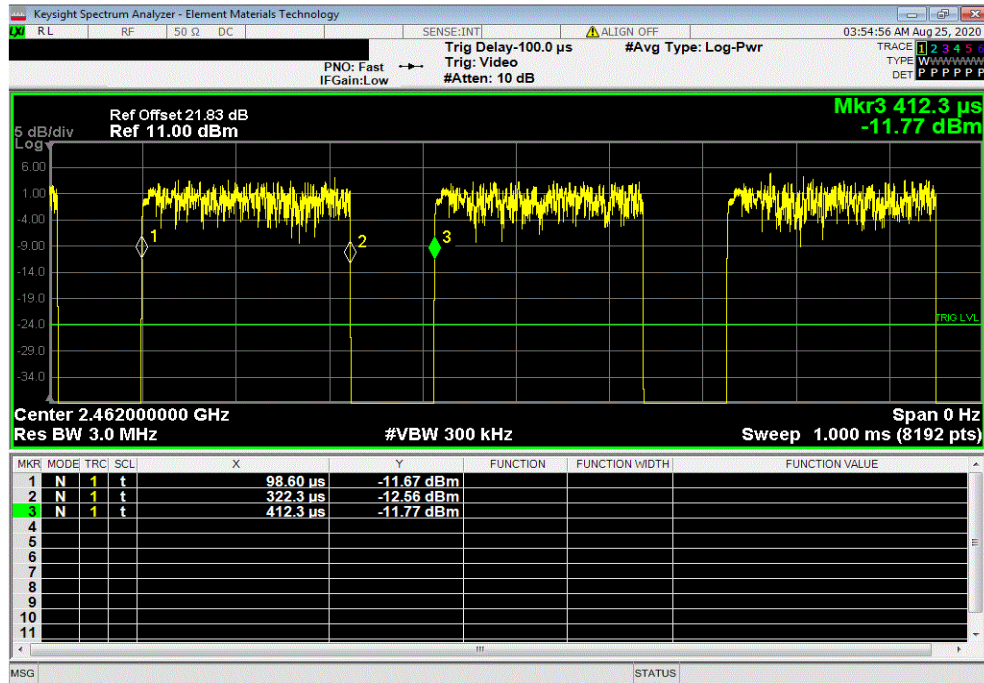

2400 MHz - 2483.5 MHz Band, 802.11(n) MCS7, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

