

Marking Drawing

Rev. Date: 2005-11-14	Rev. 4.0	Document No. 105038
Prepared by: Agnar Kopperud	Subj. Resp.: Agnar Kopperud	Approved by: Ole Christian Sørli
BGAN Class 3 - Antenna Unit Label for s/n printing		

Document Size = A4

Scale : See scaling indicator

Scaling indicator
25 mm x 25 mm

Printint colours (as shown in figure):

Black = Pantone Process Black

Light grey = Pantone Cool Grey 4 C

Dark grey = Pantone Cool Grey 11 C

Label base colour = White

Fonts used = Vectora LH (outlines created - font independent)

= Norma (outlines created - font independent)

Label corners = Radius 1 mm

Observe !

The actual barcodes are to be printed during assembly process of antenna unit itself.

No preprinting of barcodes / subnumbers. The bar code symbology is Code 128-B.

Bar code field information:

Article code = 102210

r.r = Revision from PDM system

ww = Manufacturer ID


yymm = Actual year and month

xxxx = Consecutive (serial no.) numbers incremented from 0001, starting at 0001 each new month.

Observe !

The complete serial number should be printed in a continuous sequence without notes of conjunction, or spaces. (wwyymmxxxx)

Preprinted label
layout / graphic:

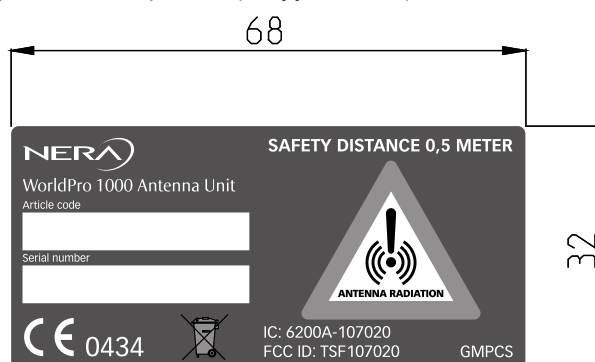

Example showing
label after printing of
bar codes:

