


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

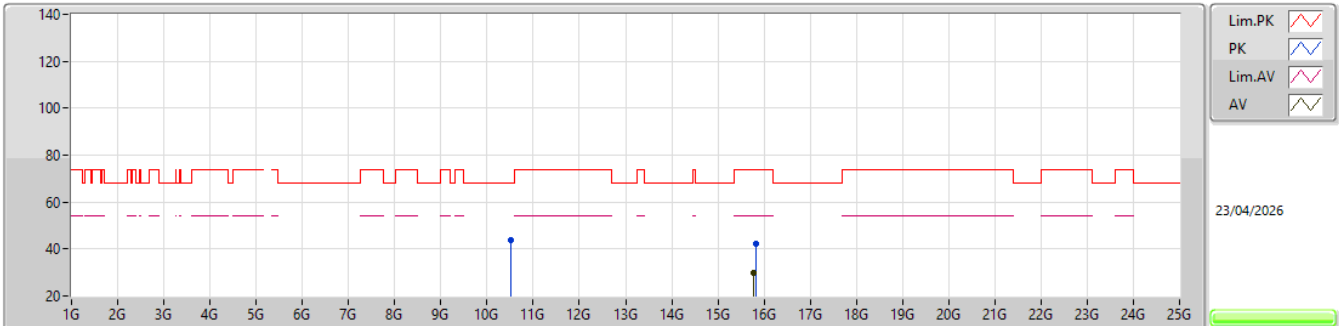


EUT_V_2TX
SET 23.5
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51528G	43.92	68.20	-24.28	61.94	3	Horizontal	122	1.80	23.5	38.20	10.43	66.65			
PK	15.82048G	42.29	74.00	-31.71	56.31	3	Horizontal	239	2.95	23.5	37.62	12.32	63.96			
AV	15.77G	29.57	54.00	-24.43	43.40	3	Horizontal	239	2.95	23.5	37.82	12.30	63.95			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

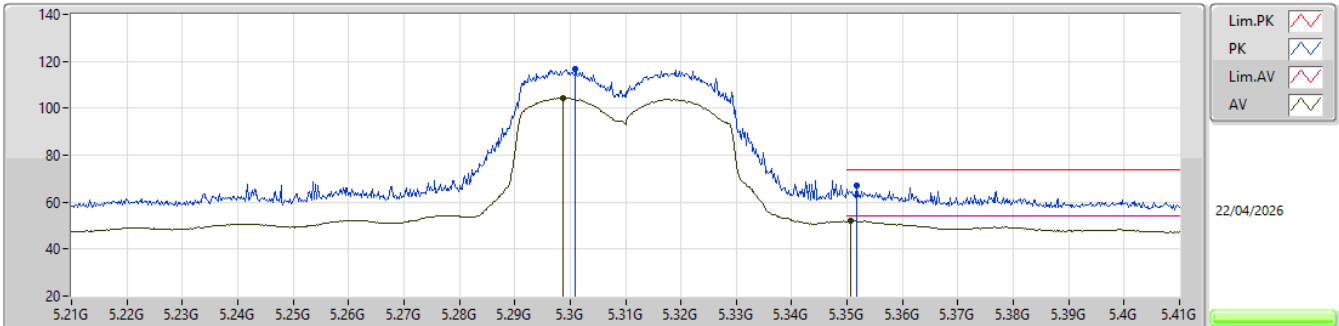


EUT_Y_2TX
Setting 22
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.301G	116.61	Inf	-Inf	109.78	3	Vertical	20	1.80	-	34.60	7.13	34.90			
AV	5.2988G	104.33	Inf	-Inf	97.51	3	Vertical	20	1.80	-	34.59	7.13	34.90			
PK	5.3518G	67.22	74.00	-6.78	60.34	3	Vertical	20	1.80	-	34.60	7.17	34.89			
AV	5.3506G	52.03	54.00	-1.97	45.15	3	Vertical	20	1.80	-	34.60	7.17	34.89			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

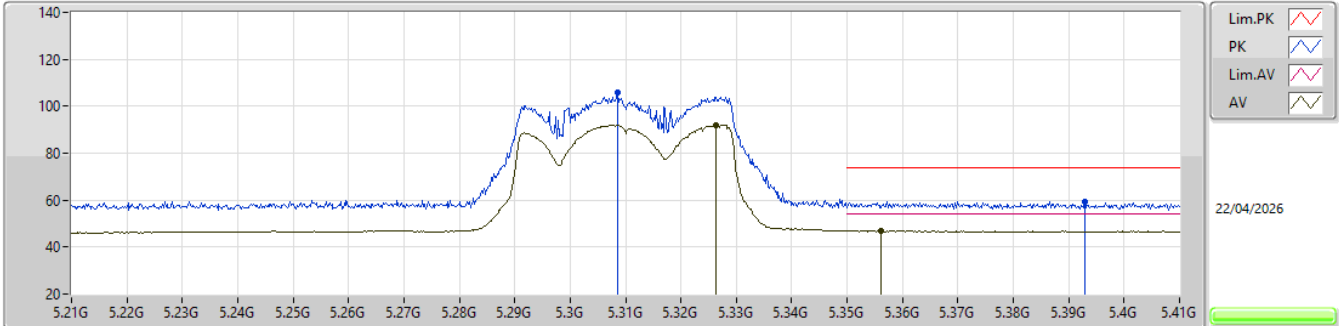


EUT_Y_2TX
Setting 22
03-D-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3086G	105.80	Inf	-Inf	98.96	3	Horizontal	295	2.97	-	34.60	7.14	34.90			
AV	5.3264G	92.05	Inf	-Inf	85.19	3	Horizontal	295	2.97	-	34.60	7.15	34.89			
PK	5.393G	59.54	74.00	-14.46	52.53	3	Horizontal	295	2.97	-	34.69	7.20	34.88			
AV	5.3562G	46.90	54.00	-7.10	40.01	3	Horizontal	295	2.97	-	34.61	7.17	34.89			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

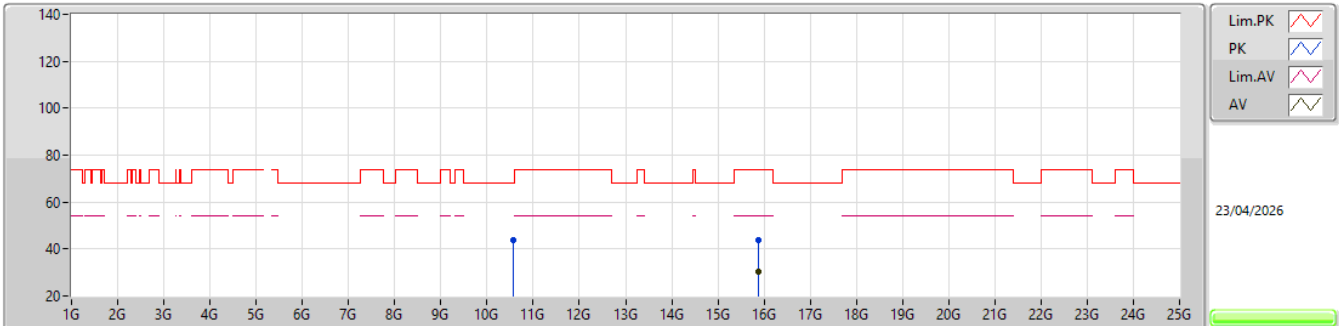


EUT Y_2TX
SET 22
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58096G	44.02	68.20	-24.18	61.89	3	Vertical	149	2.95	22	38.26	10.45	66.58			
PK	15.89024G	43.58	74.00	-30.42	57.61	3	Vertical	8	1.72	22	37.58	12.35	63.96			
AV	15.89032G	30.23	54.00	-23.77	44.26	3	Vertical	8	1.72	22	37.58	12.35	63.96			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

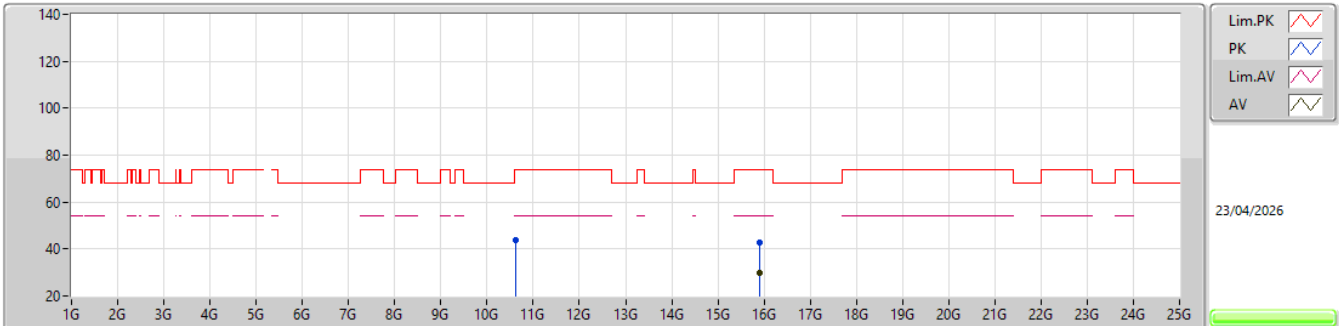


EUT Y_2TX
SET 22
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.62136G	43.89	74.00	-30.11	61.67	3	Horizontal	90	1.80	22	38.30	10.46	66.54			
PK	15.89696G	42.66	74.00	-31.34	56.68	3	Horizontal	17	1.82	22	37.59	12.35	63.96			
AV	15.90528G	29.74	54.00	-24.26	43.73	3	Horizontal	17	1.82	22	37.61	12.36	63.96			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5510MHz_TX

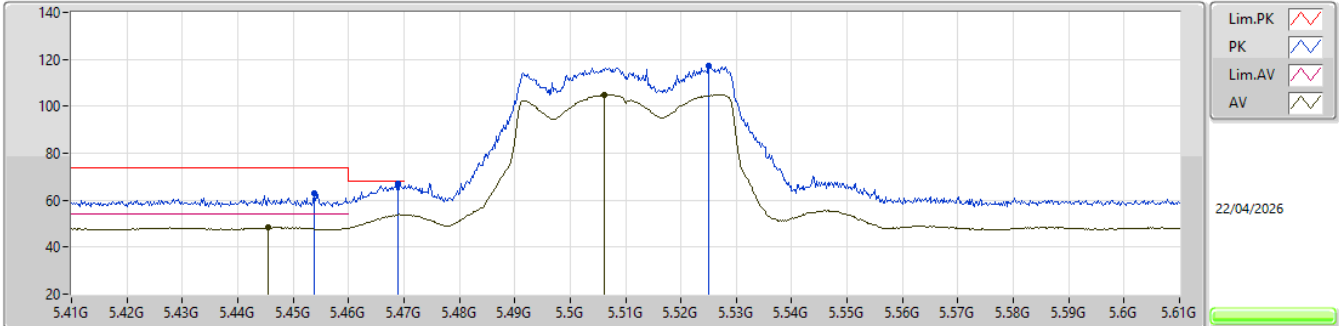


EUT_Y_2TX
Setting 22
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4538G	62.99	74.00	-11.01	55.92	3	Vertical	317	2.03	-	34.70	7.24	34.87			
AV	5.4454G	48.39	54.00	-5.61	41.33	3	Vertical	317	2.03	-	34.70	7.23	34.87			
PK	5.469G	66.91	68.20	-1.29	59.83	3	Vertical	317	2.03	-	34.70	7.25	34.87			
PK	5.525G	117.09	Inf	-Inf	110.07	3	Vertical	317	2.03	-	34.60	7.29	34.87			
AV	5.5062G	105.03	Inf	-Inf	97.93	3	Vertical	317	2.03	-	34.68	7.28	34.86			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5510MHz_TX

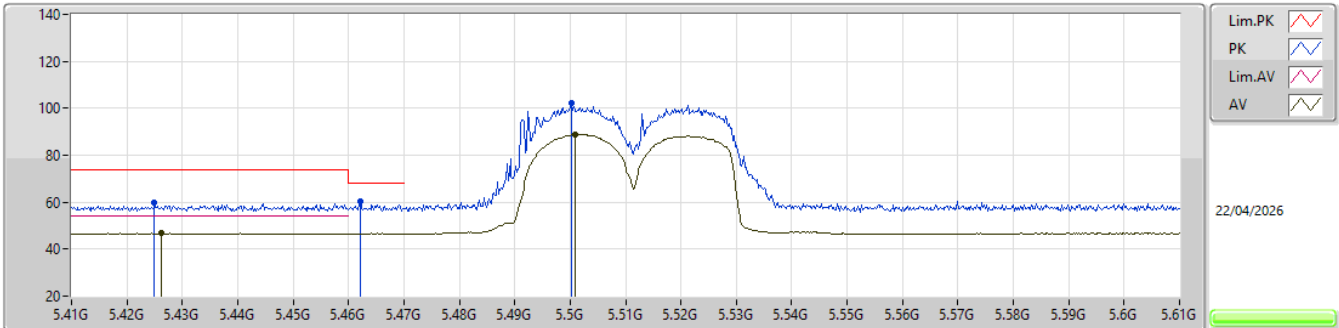


EUT_Y_2TX
Setting 22
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.425G	59.96	74.00	-14.04	52.91	3	Horizontal	36	1.80	-	34.70	7.22	34.87			
AV	5.4262G	46.76	54.00	-7.24	39.71	3	Horizontal	36	1.80	-	34.70	7.22	34.87			
PK	5.4622G	60.53	68.20	-7.67	53.45	3	Horizontal	36	1.80	-	34.70	7.25	34.87			
PK	5.5002G	102.02	Inf	-Inf	94.90	3	Horizontal	36	1.80	-	34.70	7.28	34.86			
AV	5.5008G	88.87	Inf	-Inf	81.75	3	Horizontal	36	1.80	-	34.70	7.28	34.86			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5510MHz_TX

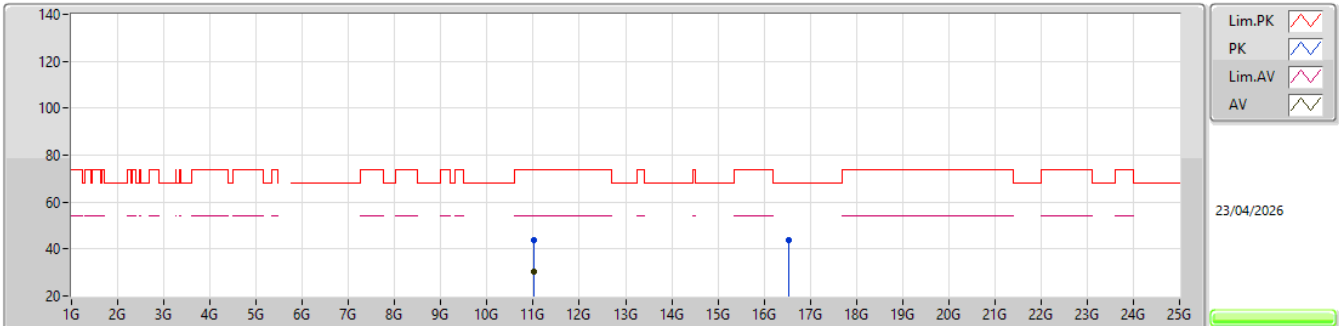EUT Y_2TX
SET 22
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.0056G	43.69	74.00	-30.31	60.87	3	Vertical	208	1.80	22	38.41	10.59	66.18			
AV	11.00744G	30.59	54.00	-23.41	47.77	3	Vertical	208	1.80	22	38.41	10.59	66.18			
PK	16.52688G	43.69	68.20	-24.51	56.30	3	Vertical	3	2.90	22	38.25	12.63	63.49			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5510MHz_TX

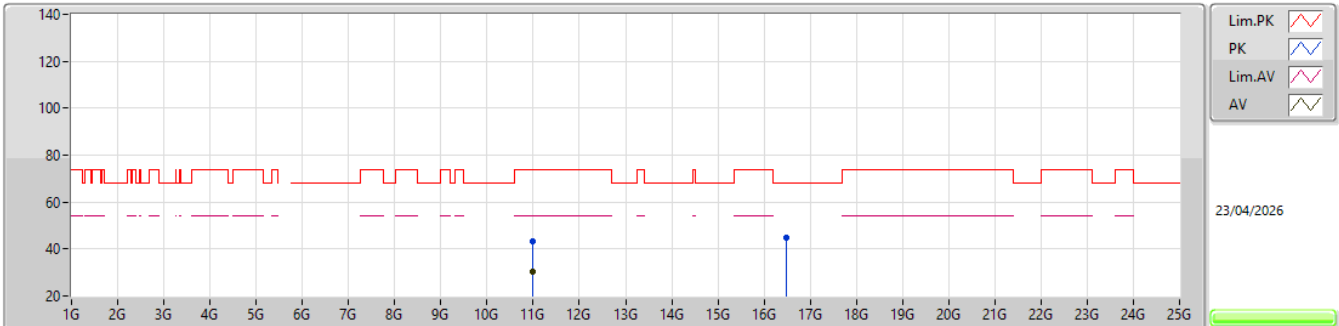EUT Y_2TX
SET 22
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99504G	43.48	74.00	-30.52	60.67	3	Horizontal	95	1.80	22	38.41	10.58	66.18			
AV	11.00152G	30.55	54.00	-23.45	47.74	3	Horizontal	95	1.80	22	38.40	10.59	66.18			
PK	16.49424G	44.81	68.20	-23.39	57.48	3	Horizontal	2	2.90	22	38.21	12.61	63.49			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

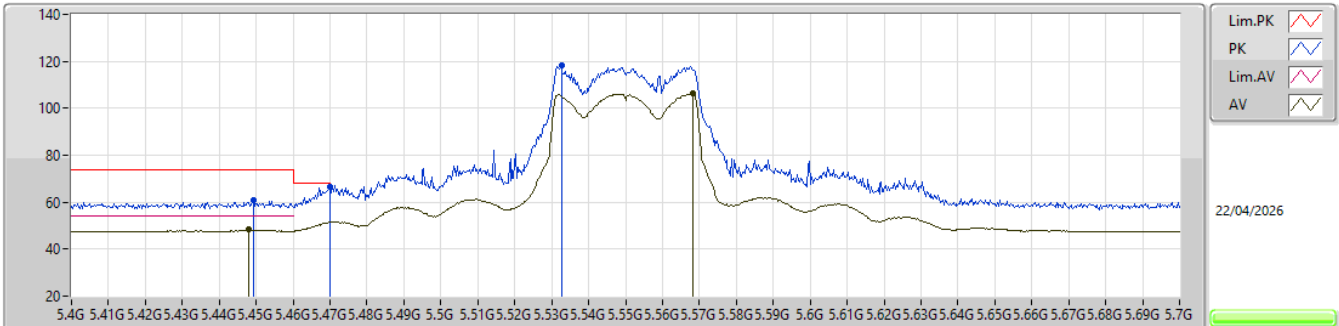


EUT_Y_2TX
Setting 24
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4492G	60.84	74.00	-13.16	53.77	3	Vertical	322	1.80	-	34.70	7.24	34.87			
AV	5.448G	48.20	54.00	-5.80	41.13	3	Vertical	322	1.80	-	34.70	7.24	34.87			
PK	5.4699G	66.77	68.20	-1.43	59.69	3	Vertical	322	1.80	-	34.70	7.25	34.87			
PK	5.5326G	118.21	Inf	-Inf	111.21	3	Vertical	322	1.80	-	34.57	7.30	34.87			
AV	5.5683G	106.28	Inf	-Inf	99.29	3	Vertical	322	1.80	-	34.54	7.33	34.88			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

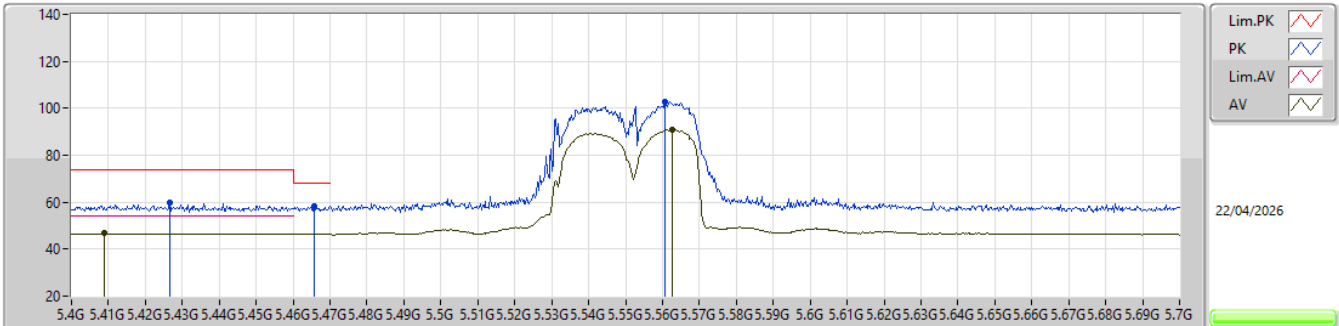


EUT_Y_2TX
Setting 24
03-D-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4267G	59.57	74.00	-14.43	52.52	3	Horizontal	36	1.77	-	34.70	7.22	34.87			
AV	5.409G	46.66	54.00	-7.34	39.63	3	Horizontal	36	1.77	-	34.70	7.21	34.88			
PK	5.4657G	58.35	68.20	-9.85	51.27	3	Horizontal	36	1.77	-	34.70	7.25	34.87			
PK	5.5608G	102.88	Inf	-Inf	95.92	3	Horizontal	36	1.77	-	34.52	7.32	34.88			
AV	5.5626G	91.08	Inf	-Inf	84.11	3	Horizontal	36	1.77	-	34.53	7.32	34.88			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5550MHz_TX

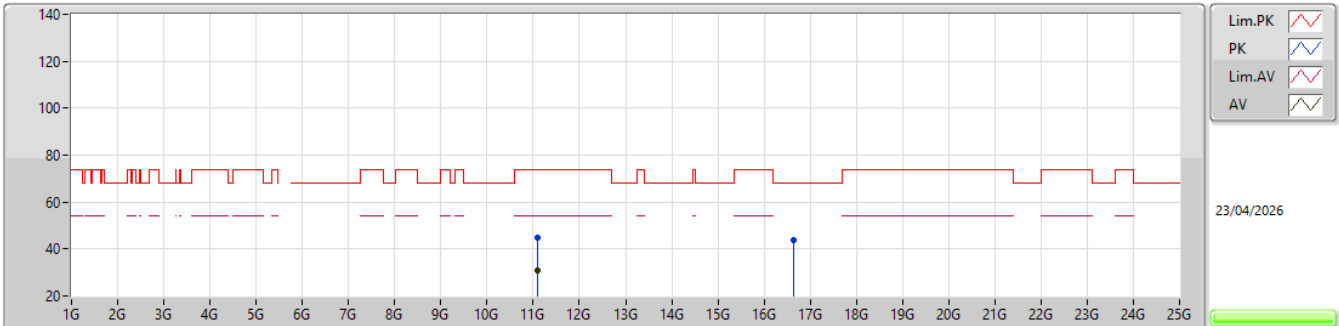EUT Y_2TX
SET 24
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.10272G	44.74	74.00	-29.26	61.73	3	Vertical	125	1.70	24	38.60	10.62	66.21			
AV	11.10152G	30.90	54.00	-23.10	47.89	3	Vertical	125	1.70	24	38.60	10.62	66.21			
PK	16.6448G	43.96	68.20	-24.24	55.94	3	Vertical	166	2.92	24	38.86	12.68	63.52			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5550MHz_TX

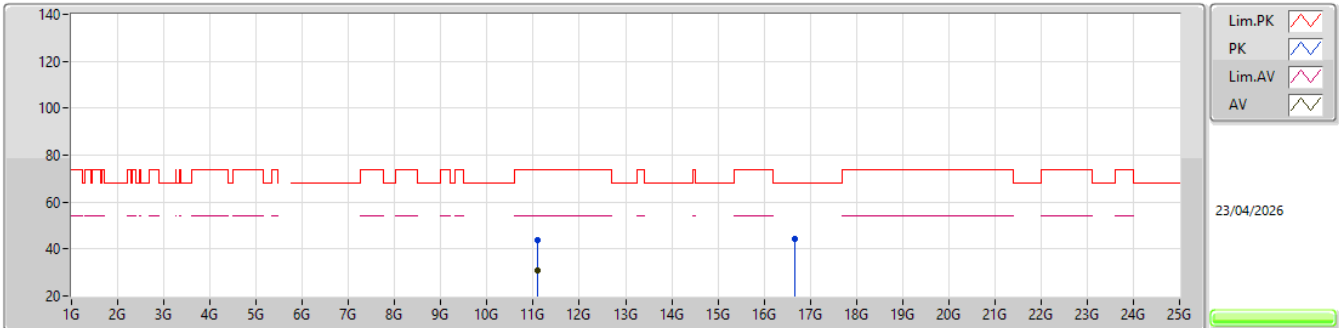EUT Y_2TX
SET 24
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.08696G	43.60	74.00	-30.40	60.63	3	Horizontal	360	1.80	24	38.57	10.61	66.21			
AV	11.10296G	30.98	54.00	-23.02	47.97	3	Horizontal	360	1.80	24	38.60	10.62	66.21			
PK	16.67336G	44.26	68.20	-23.94	56.11	3	Horizontal	9	2.91	24	38.99	12.69	63.53			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5670MHz_TX

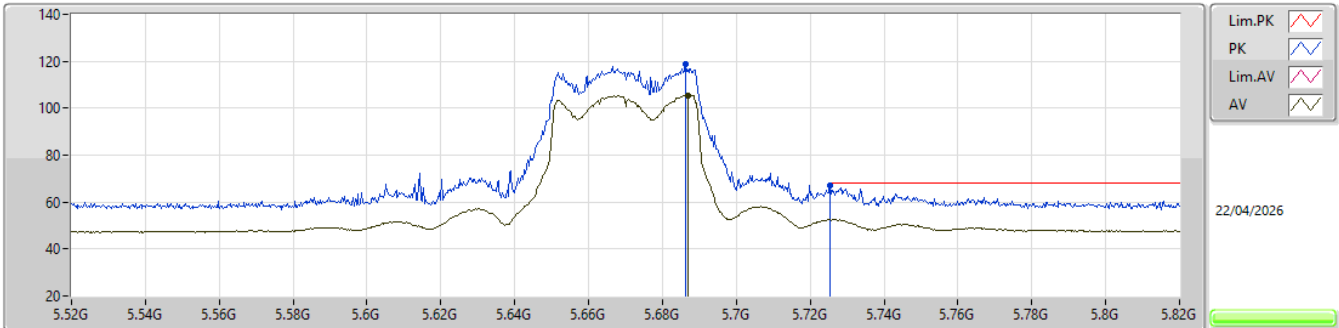EUT_Y_2TX
Setting 22.5
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6862G	118.83	Inf	-Inf	111.97	3	Vertical	320	1.89	-	34.36	7.42	34.92			
AV	5.6868G	105.51	Inf	-Inf	98.66	3	Vertical	320	1.89	-	34.35	7.42	34.92			
PK	5.7255G	67.00	68.20	-1.20	60.18	3	Vertical	320	1.89	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5670MHz_TX

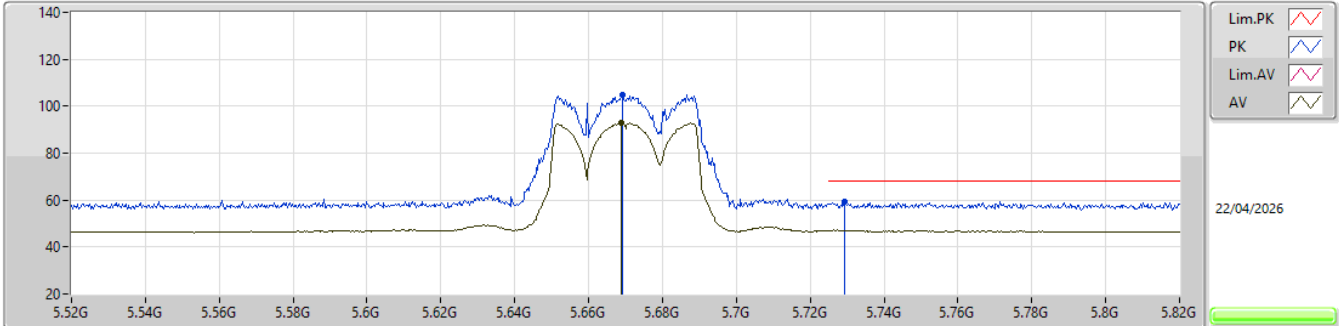


EUT_Y_2TX
Setting 22.5
03-D-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6691G	104.91	Inf	-Inf	97.99	3	Horizontal	25	2.64	-	34.42	7.41	34.91			
AV	5.6688G	92.80	Inf	-Inf	85.88	3	Horizontal	25	2.64	-	34.42	7.41	34.91			
PK	5.7294G	59.47	68.20	-8.73	52.65	3	Horizontal	25	2.64	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5670MHz_TX

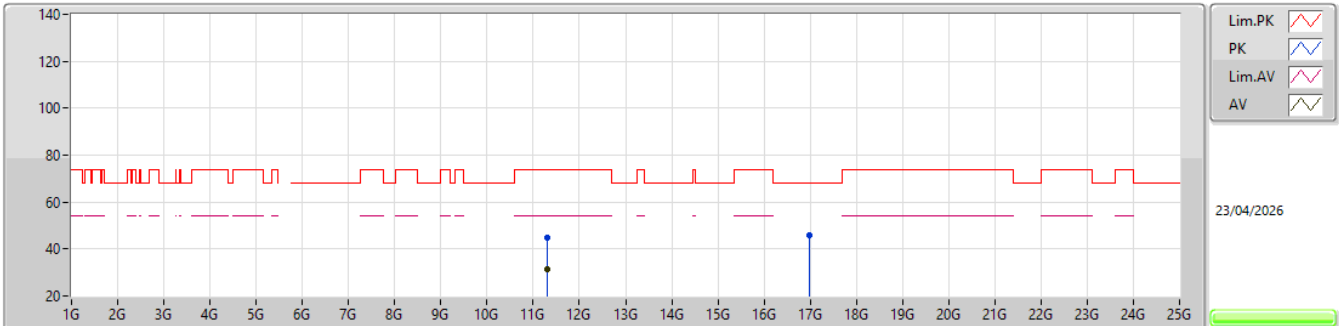


EUT_V_2TX
SET 22.5
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.31224G	44.69	74.00	-29.31	61.56	3	Vertical	90	1.17	22.5	38.72	10.69	66.28			
AV	11.31048G	31.21	54.00	-22.79	48.08	3	Vertical	90	1.17	22.5	38.72	10.69	66.28			
PK	16.97192G	46.08	68.20	-22.12	57.05	3	Vertical	164	2.95	22.5	39.83	12.82	63.62			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5670MHz_TX

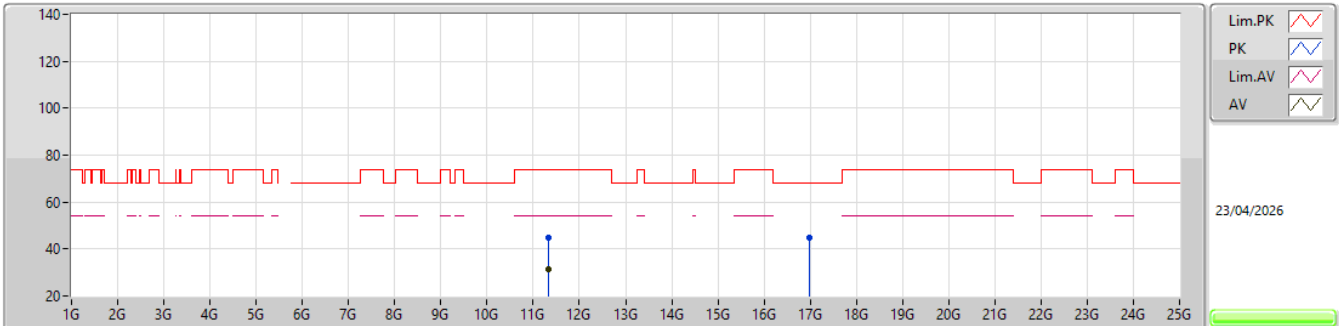


EUT_V_2TX
SET 22.5
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.32304G	44.65	74.00	-29.35	61.49	3	Horizontal	106	2.94	22.5	38.75	10.69	66.28			
AV	11.31848G	31.31	54.00	-22.69	48.16	3	Horizontal	106	2.94	22.5	38.74	10.69	66.28			
PK	16.97456G	44.76	68.20	-23.44	55.71	3	Horizontal	329	2.80	22.5	39.85	12.82	63.62			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

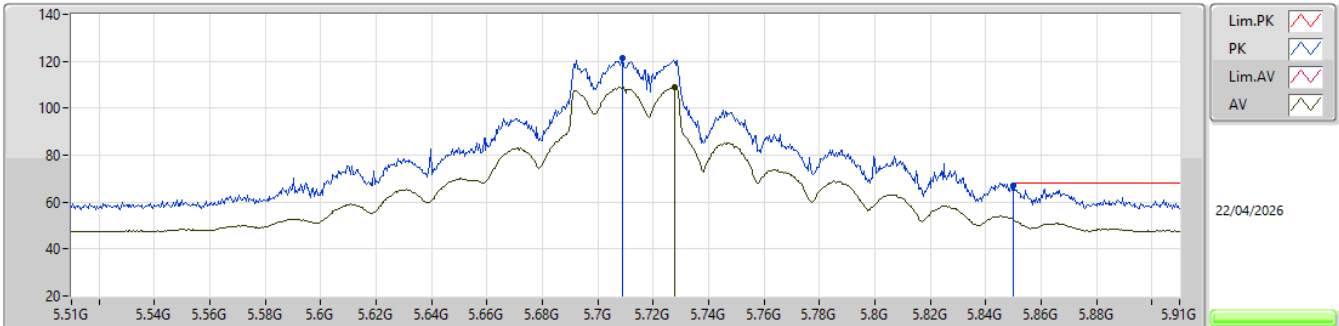


EUT_Y_2TX
Setting 26.5
03-D-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7088G	121.22	Inf	-Inf	114.40	3	Vertical	322	1.80	-	34.30	7.44	34.92			
AV	5.7276G	109.02	Inf	-Inf	102.20	3	Vertical	322	1.80	-	34.30	7.45	34.93			
PK	5.85G	66.83	68.20	-1.37	59.78	3	Vertical	322	1.80	-	34.50	7.51	34.96			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5710MHz Straddle 5.47-5.725GHz_TX

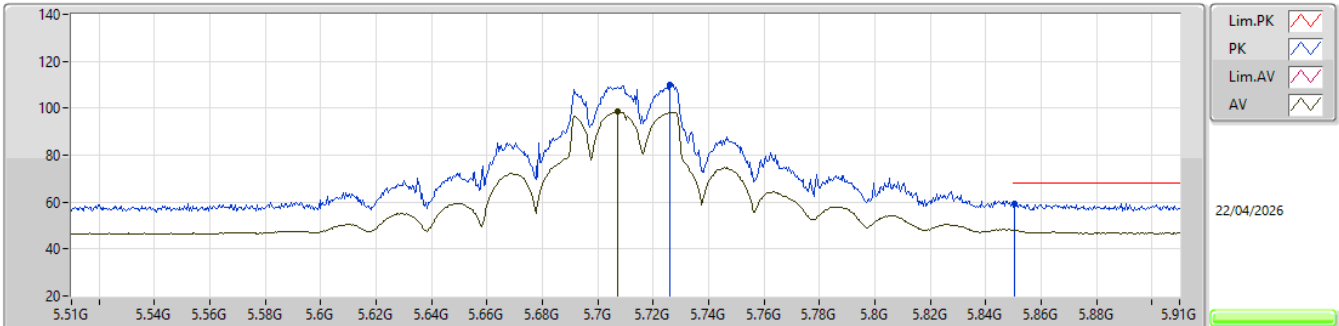EUT_Y_2TX
Setting 26.5
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.726G	110.19	Inf	-Inf	103.37	3	Horizontal	21	2.52	-	34.30	7.45	34.93			
AV	5.7072G	98.59	Inf	-Inf	91.77	3	Horizontal	21	2.52	-	34.30	7.44	34.92			
PK	5.8504G	59.53	68.20	-8.67	52.48	3	Horizontal	21	2.52	-	34.50	7.52	34.97			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

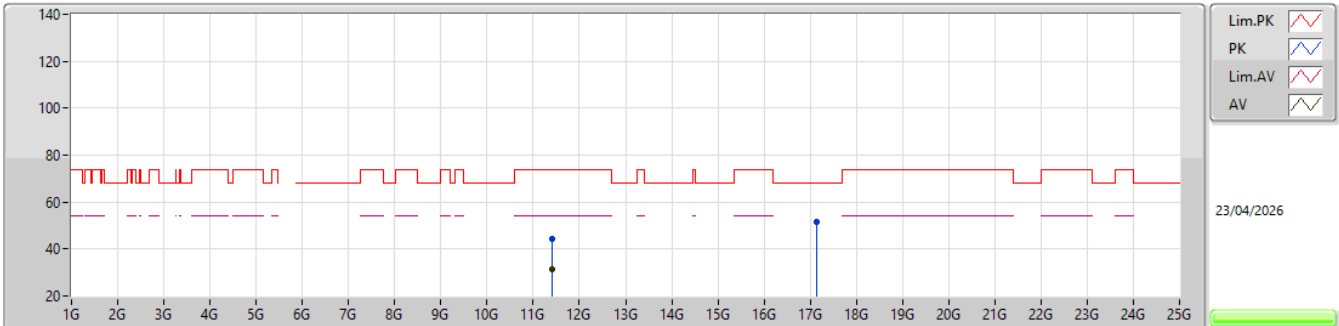


EUT_V_2TX
SET 26.5
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.41464G	44.40	74.00	-29.60	61.06	3	Vertical	9	1.80	26.5	38.93	10.72	66.31			
AV	11.41848G	31.24	54.00	-22.76	47.89	3	Vertical	9	1.80	26.5	38.94	10.72	66.31			
PK	17.13936G	51.60	68.20	-16.60	62.08	3	Vertical	23	1.80	26.5	40.46	12.90	63.84			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

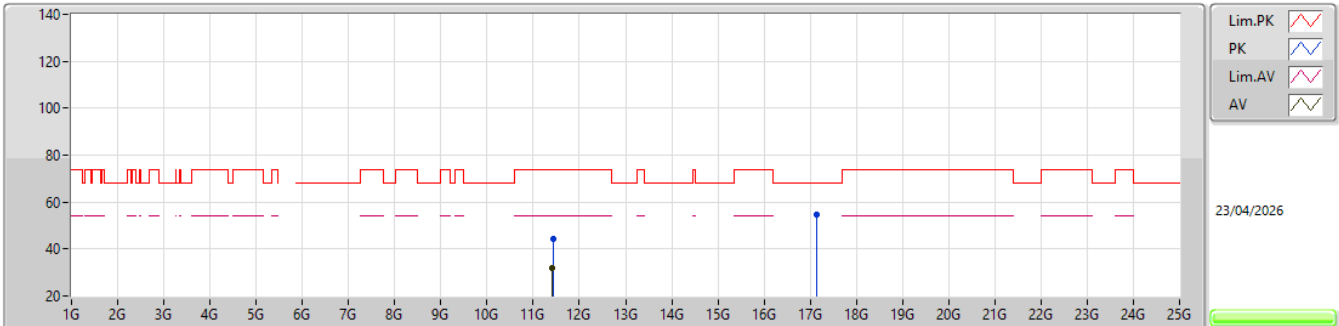


EUT_V_2TX
SET 26.5
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44664G	44.52	74.00	-29.48	61.12	3	Horizontal	12	1.80	26.5	38.99	10.73	66.32			
AV	11.42G	31.69	54.00	-22.31	48.34	3	Horizontal	12	1.80	26.5	38.94	10.72	66.31			
PK	17.13176G	54.69	68.20	-13.51	65.20	3	Horizontal	10	1.80	26.5	40.43	12.89	63.83			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5755MHz_TX

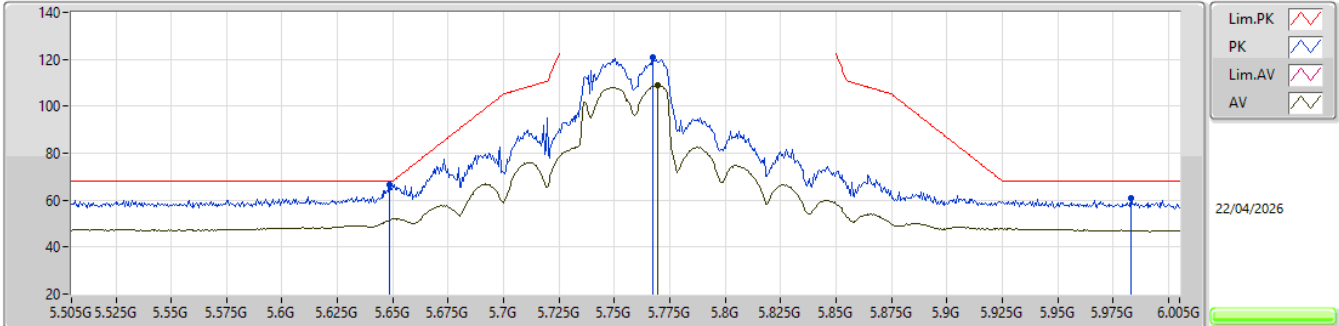


EUT_Y_2TX
Setting 25.5
03-D-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6485G	66.77	68.20	-1.43	59.78	3	Vertical	316	1.99	-	34.50	7.39	34.90				
PK	5.7675G	120.80	Inf	-Inf	114.00	3	Vertical	316	1.99	-	34.26	7.48	34.94				
AV	5.7695G	108.79	Inf	-Inf	101.98	3	Vertical	316	1.99	-	34.26	7.49	34.94				
PK	5.983G	60.96	68.20	-7.24	53.66	3	Vertical	319	2.03	-	34.77	7.53	35.00				

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5755MHz_TX

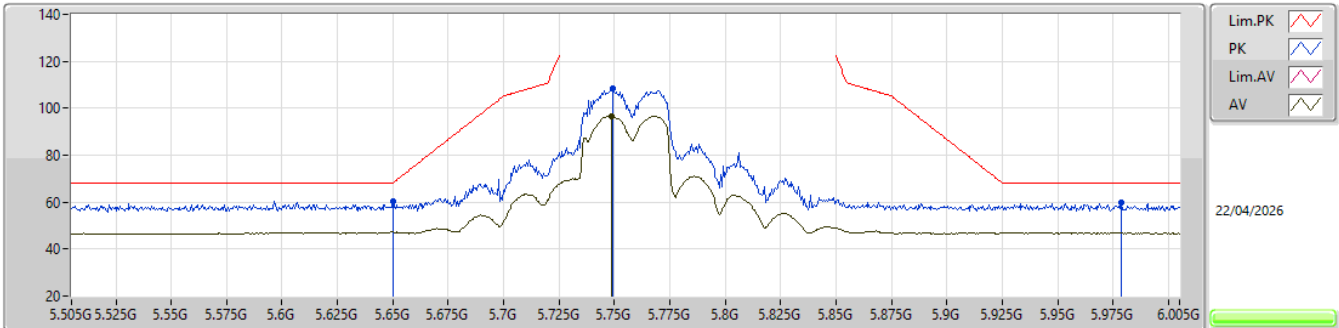


EUT_Y_2TX
Setting 25.5
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.65G	60.56	68.20	-7.64	53.58	3	Horizontal	352	2.60	-	34.50	7.39	34.91			
PK	5.7495G	108.53	Inf	-Inf	101.69	3	Horizontal	352	2.60	-	34.30	7.47	34.93			
AV	5.7485G	96.66	Inf	-Inf	89.82	3	Horizontal	352	2.60	-	34.30	7.47	34.93			
PK	5.9785G	59.59	68.20	-8.61	52.30	3	Horizontal	352	2.60	-	34.76	7.53	35.00			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5755MHz_TX

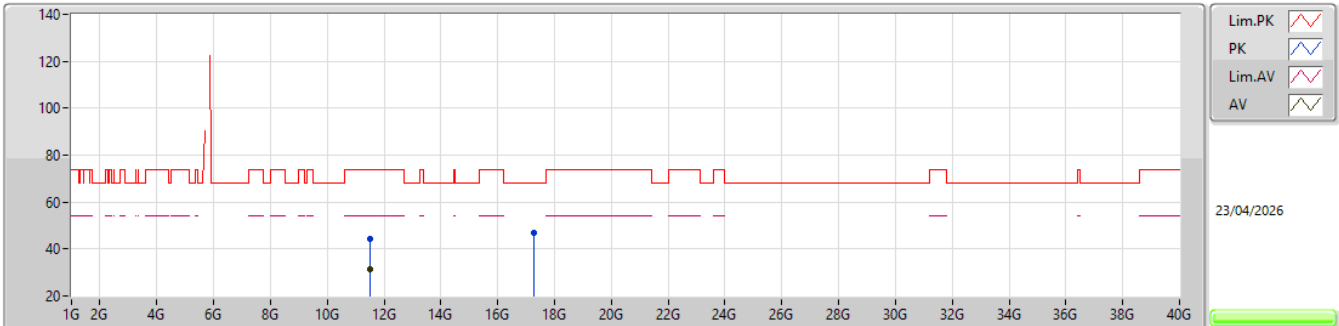


EUT_Y_2TX
Setting 25.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.51381G	44.41	74.00	-29.59	59.12	3	Vertical	156	1.80	-	39.10	12.54	66.35			
AV	11.525G	31.24	54.00	-22.76	45.94	3	Vertical	156	1.80	-	39.10	12.55	66.35			
PK	17.25801G	46.75	68.20	-21.45	53.94	3	Vertical	158	1.69	-	41.73	15.09	64.01			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5755MHz_TX

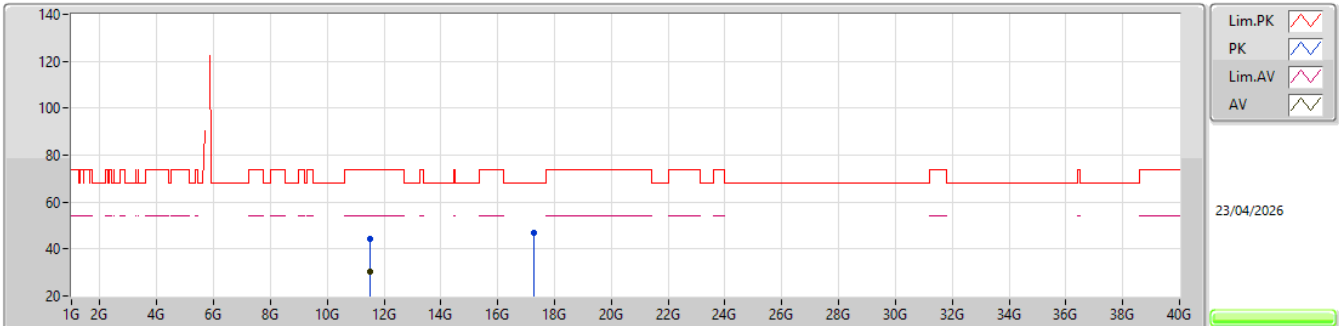EUT_Y_2TX
Setting 25.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.51702G	44.11	74.00	-29.89	58.81	3	Horizontal	296	1.65	-	39.10	12.55	66.35			
AV	11.52479G	30.31	54.00	-23.69	45.01	3	Horizontal	296	1.65	-	39.10	12.55	66.35			
PK	17.26107G	46.88	68.20	-21.32	54.07	3	Horizontal	194	1.57	-	41.74	15.09	64.02			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5795MHz_TX

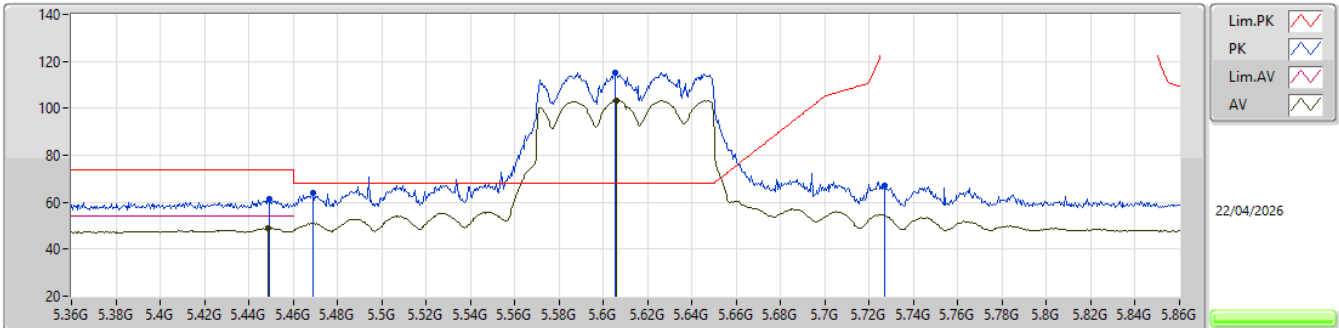


EUT_Y_2TX
Setting 23.5
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.449G	61.62	74.00	-12.38	54.55	3	Vertical	318	2.01	-	34.70	7.24	34.87
AV	5.4485G	48.93	54.00	-5.07	41.86	3	Vertical	318	2.01	-	34.70	7.24	34.87
PK	5.469G	63.76	68.20	-4.44	56.68	3	Vertical	318	2.01	-	34.70	7.25	34.87
PK	5.6055G	115.23	Inf	-Inf	108.18	3	Vertical	318	2.01	-	34.59	7.35	34.89
AV	5.606G	103.22	Inf	-Inf	96.17	3	Vertical	318	2.01	-	34.59	7.35	34.89
PK	5.727G	66.98	68.20	-1.22	60.16	3	Vertical	318	2.01	-	34.30	7.45	34.93

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5795MHz_TX

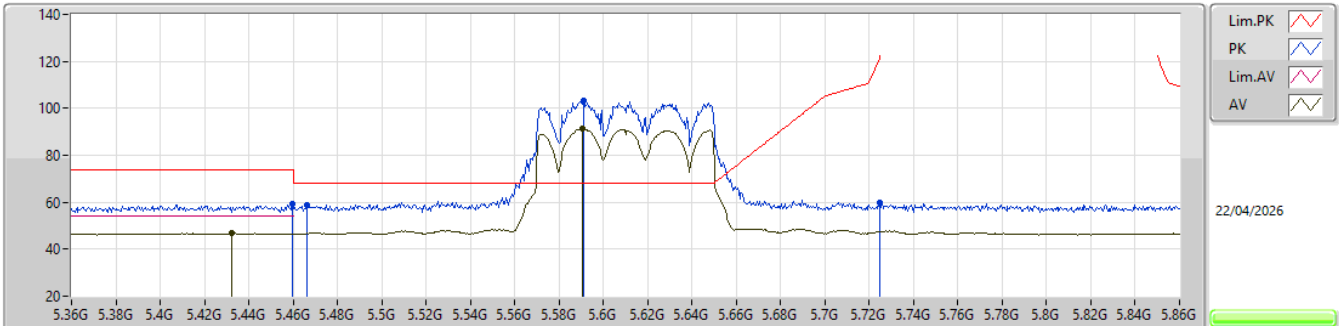


EUT_Y_2TX
Setting 23.5
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4595G	59.37	74.00	-14.63	52.30	3	Horizontal	24	2.66	-	34.70	7.24	34.87
AV	5.4325G	46.69	54.00	-7.31	39.64	3	Horizontal	24	2.66	-	34.70	7.22	34.87
PK	5.4665G	58.65	68.20	-9.55	51.57	3	Horizontal	24	2.66	-	34.70	7.25	34.87
PK	5.591G	103.31	Inf	-Inf	96.28	3	Horizontal	24	2.66	-	34.58	7.34	34.89
AV	5.5905G	91.19	Inf	-Inf	84.16	3	Horizontal	24	2.66	-	34.58	7.34	34.89
PK	5.725G	59.70	68.20	-8.50	52.88	3	Horizontal	24	2.66	-	34.30	7.45	34.93

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5795MHz_TX

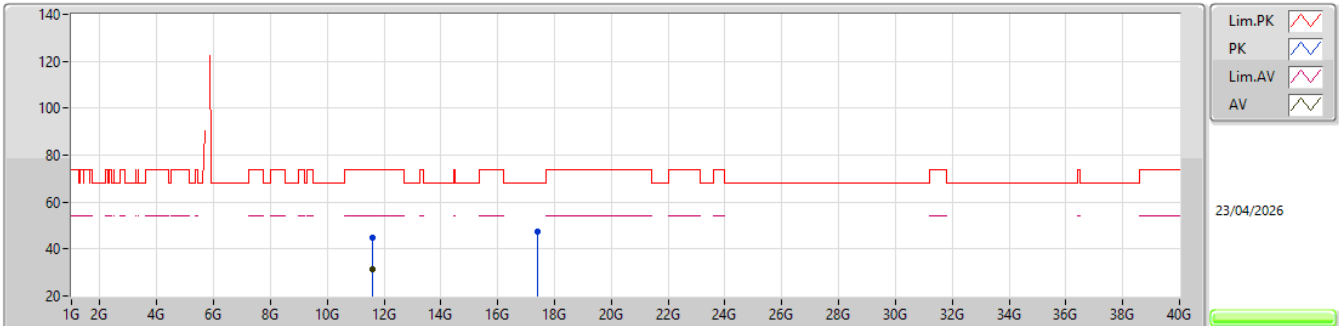EUT_Y_2TX
Setting 23.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.59375G	44.57	74.00	-29.43	59.28	3	Vertical	36	1.61	-	39.10	12.58	66.39			
AV	11.57992G	31.23	54.00	-22.77	45.93	3	Vertical	36	1.61	-	39.10	12.58	66.38			
PK	17.38761G	47.34	68.20	-20.86	54.38	3	Vertical	119	1.40	-	42.05	15.11	64.20			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5795MHz_TX

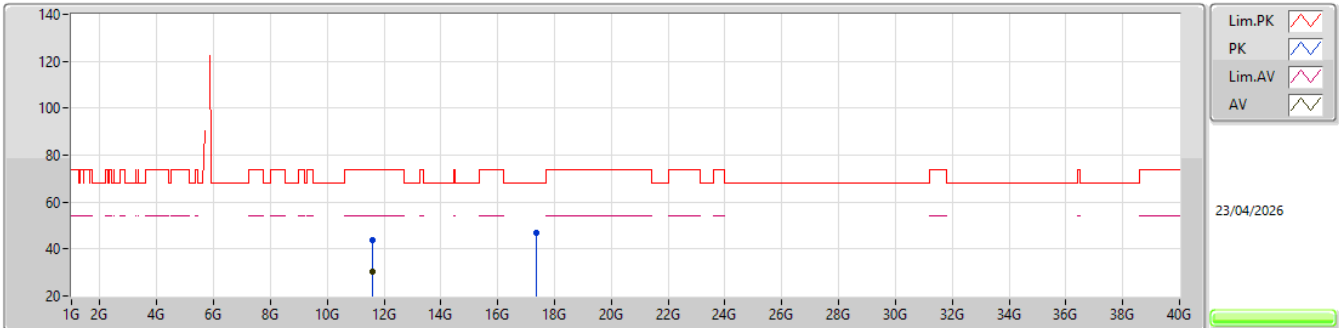EUT_Y_2TX
Setting 23.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.59084G	43.66	74.00	-30.34	58.37	3	Horizontal	145	1.90	-	39.10	12.58	66.39			
AV	11.58067G	30.23	54.00	-23.77	44.93	3	Horizontal	145	1.90	-	39.10	12.58	66.38			
PK	17.37042G	46.69	68.20	-21.51	53.78	3	Horizontal	286	1.59	-	41.98	15.11	64.18			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

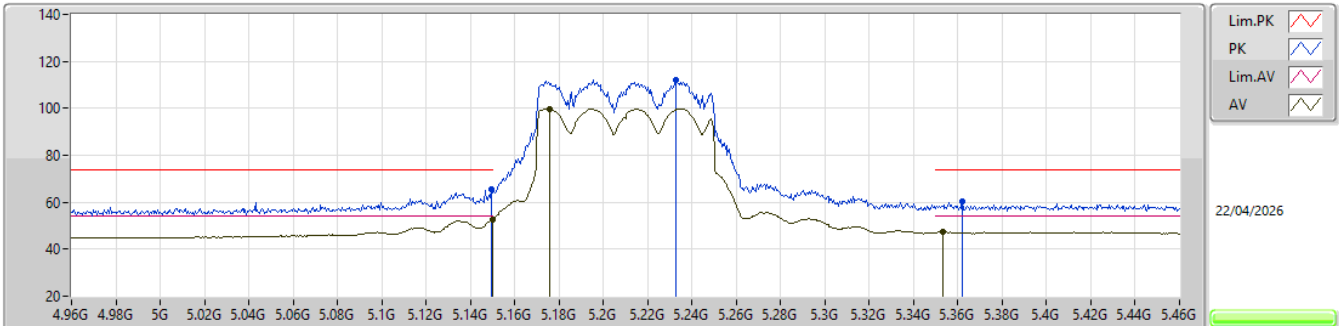


EUT Y_2TX
Setting 21
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1495G	65.75	74.00	-8.25	59.57	3	Vertical	328	1.78	-	34.10	7.01	34.93			
AV	5.15G	52.79	54.00	-1.21	46.61	3	Vertical	328	1.78	-	34.10	7.01	34.93			
PK	5.233G	112.32	Inf	-Inf	105.92	3	Vertical	328	1.78	-	34.23	7.08	34.91			
AV	5.176G	99.90	Inf	-Inf	93.68	3	Vertical	328	1.78	-	34.10	7.04	34.92			
PK	5.362G	60.19	74.00	-13.81	53.29	3	Vertical	328	1.78	-	34.62	7.17	34.89			
AV	5.353G	47.42	54.00	-6.58	40.53	3	Vertical	328	1.78	-	34.61	7.17	34.89			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

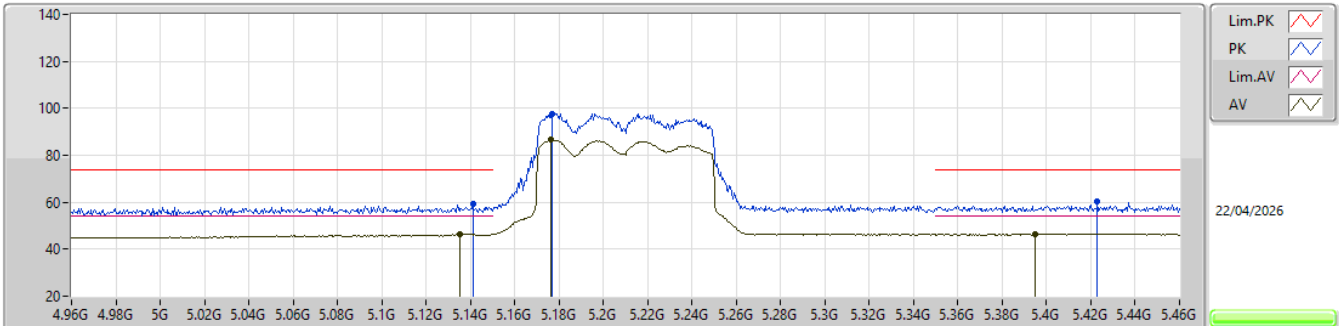


EUT_Y_2TX
Setting 21
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.141G	59.34	74.00	-14.66	53.17	3	Horizontal	291	1.85	-	34.10	7.00	34.93			
AV	5.1355G	46.53	54.00	-7.47	40.36	3	Horizontal	291	1.85	-	34.10	7.00	34.93			
PK	5.177G	97.67	Inf	-Inf	91.45	3	Horizontal	291	1.85	-	34.10	7.04	34.92			
AV	5.1765G	86.53	Inf	-Inf	80.31	3	Horizontal	291	1.85	-	34.10	7.04	34.92			
PK	5.423G	60.18	74.00	-13.82	53.14	3	Horizontal	291	1.85	-	34.70	7.22	34.88			
AV	5.395G	46.56	54.00	-7.44	39.55	3	Horizontal	291	1.85	-	34.69	7.20	34.88			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

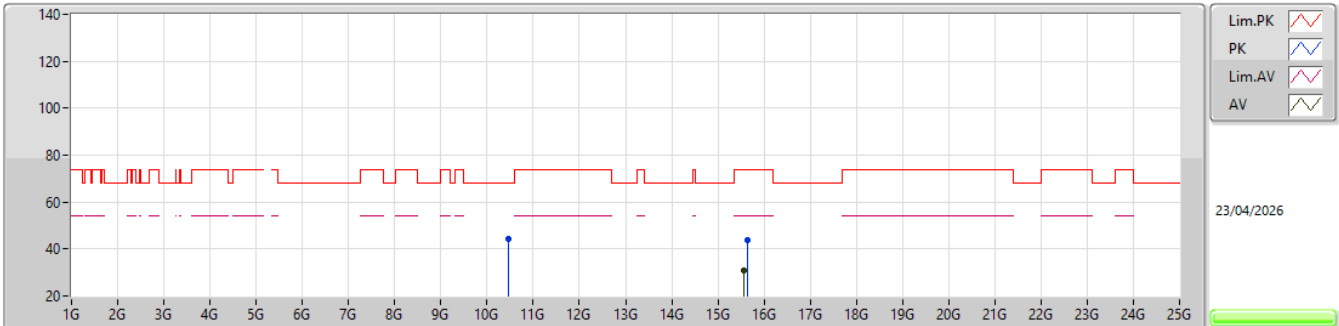


EUT Y_2TX
SET 21
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.46976G	44.44	68.20	-23.76	62.60	3	Vertical	342	1.88	21	38.14	10.41	66.71			
PK	15.64264G	44.05	74.00	-29.95	57.65	3	Vertical	42	1.61	21	38.10	12.24	63.94			
AV	15.57016G	30.68	54.00	-23.32	44.26	3	Vertical	42	1.61	21	38.16	12.20	63.94			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

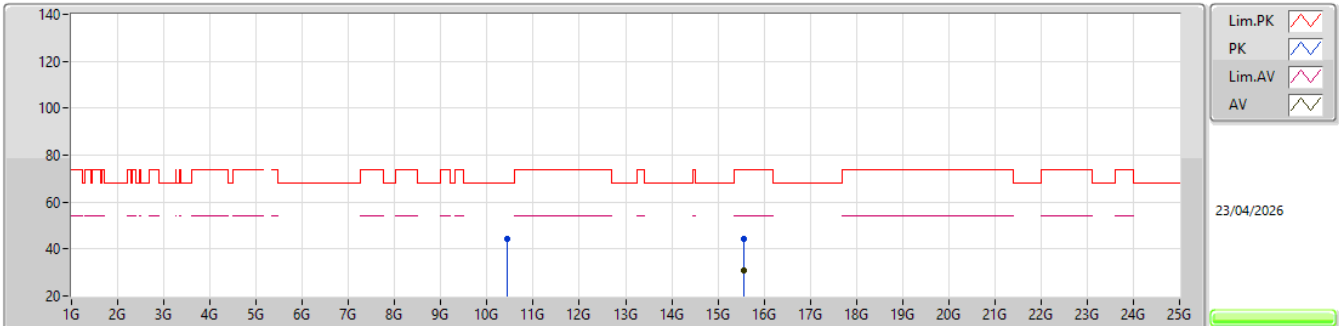


EUT Y_2TX
SET 21
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.43552G	44.18	68.20	-24.02	62.47	3	Horizontal	352	1.10	21	38.07	10.40	66.76			
PK	15.55304G	44.23	74.00	-29.77	57.77	3	Horizontal	274	2.83	21	38.19	12.20	63.93			
AV	15.56104G	30.63	54.00	-23.37	44.18	3	Horizontal	274	2.83	21	38.18	12.20	63.93			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

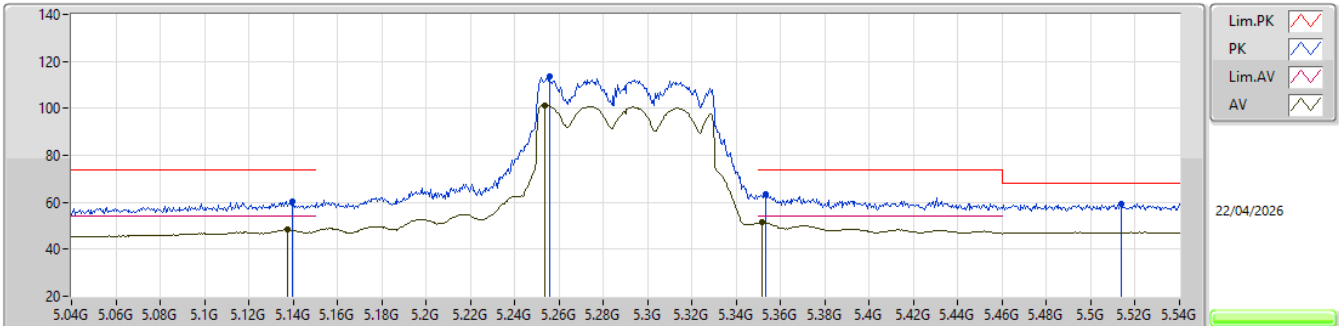


EUT_Y_2TX
Setting 21.5
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1395G	60.51	74.00	-13.49	54.34	3	Vertical	326	1.95	-	34.10	7.00	34.93			
AV	5.1375G	48.36	54.00	-5.64	42.19	3	Vertical	326	1.95	-	34.10	7.00	34.93			
PK	5.2555G	113.53	Inf	-Inf	107.01	3	Vertical	326	1.95	-	34.33	7.10	34.91			
AV	5.2535G	101.33	Inf	-Inf	94.82	3	Vertical	326	1.95	-	34.32	7.10	34.91			
PK	5.353G	63.24	74.00	-10.76	56.35	3	Vertical	326	1.95	-	34.61	7.17	34.89			
AV	5.3515G	51.39	54.00	-2.61	44.51	3	Vertical	326	1.95	-	34.60	7.17	34.89			
PK	5.5135G	59.42	68.20	-8.78	52.34	3	Vertical	326	1.95	-	34.65	7.29	34.86			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

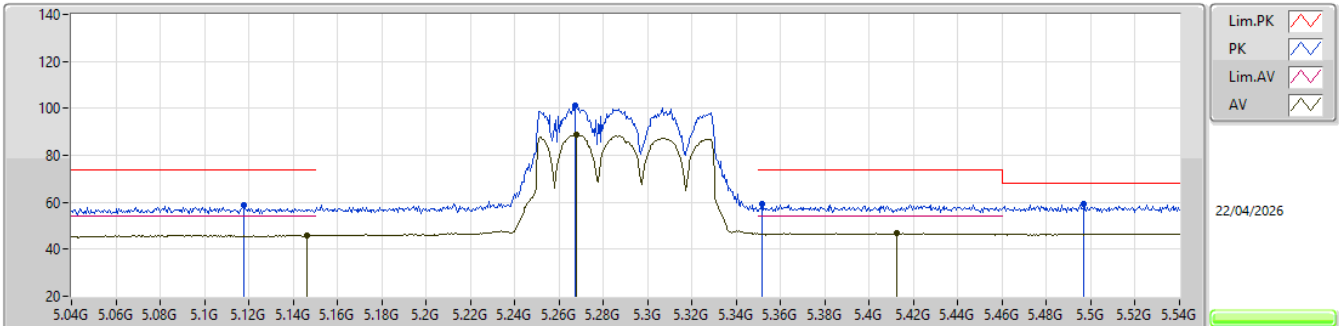


EUT_Y_2TX
Setting 21
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.118G	58.97	74.00	-15.03	52.83	3	Horizontal	303	2.97	-	34.10	6.98	34.94			
AV	5.146G	45.86	54.00	-8.14	39.68	3	Horizontal	303	2.97	-	34.10	7.01	34.93			
PK	5.267G	101.17	Inf	-Inf	94.57	3	Horizontal	303	2.97	-	34.40	7.11	34.91			
AV	5.268G	89.05	Inf	-Inf	82.44	3	Horizontal	303	2.97	-	34.41	7.11	34.91			
PK	5.3515G	59.09	74.00	-14.91	52.21	3	Horizontal	303	2.97	-	34.60	7.17	34.89			
AV	5.4125G	46.74	54.00	-7.26	39.71	3	Horizontal	303	2.97	-	34.70	7.21	34.88			
PK	5.497G	59.17	68.20	-9.03	52.06	3	Horizontal	303	2.97	-	34.70	7.27	34.86			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

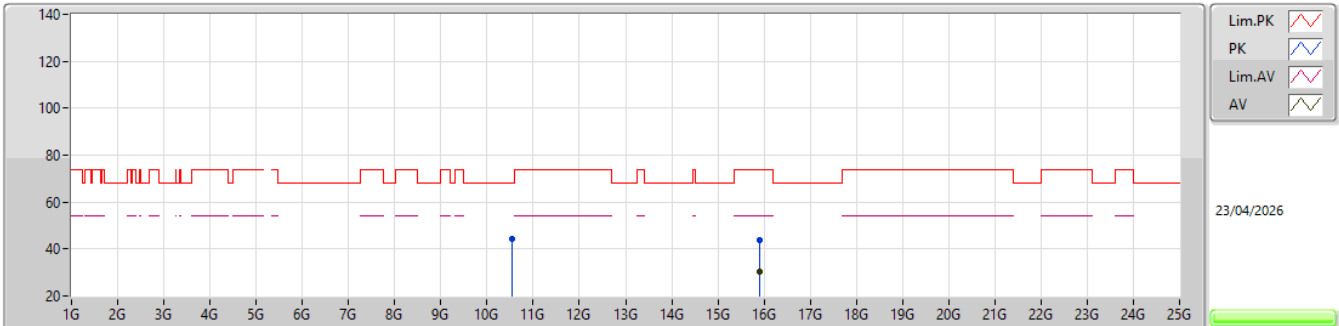


EUT Y_2TX
SET 21
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.53984G	44.34	68.20	-23.86	62.32	3	Vertical	360	1.80	21	38.20	10.44	66.62			
PK	15.89704G	43.62	74.00	-30.38	57.64	3	Vertical	220	1.80	21	37.59	12.35	63.96			
AV	15.90088G	30.31	54.00	-23.69	44.32	3	Vertical	220	1.80	21	37.60	12.35	63.96			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

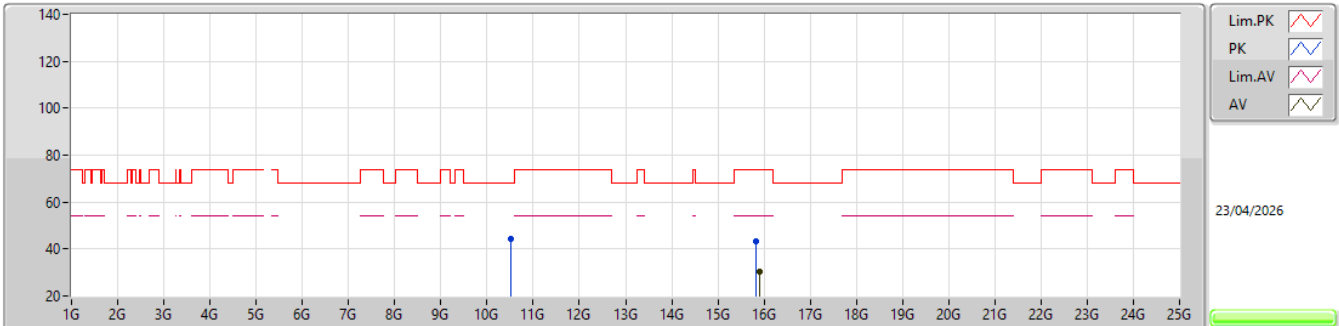


EUT Y_2TX
SET 21
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5232G	44.43	68.20	-23.77	62.44	3	Horizontal	343	1.80	21	38.20	10.43	66.64			
PK	15.8156G	43.21	74.00	-30.79	57.21	3	Horizontal	11	2.95	21	37.64	12.32	63.96			
AV	15.89944G	30.19	54.00	-23.81	44.20	3	Horizontal	11	2.95	21	37.60	12.35	63.96			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5530MHz_TX

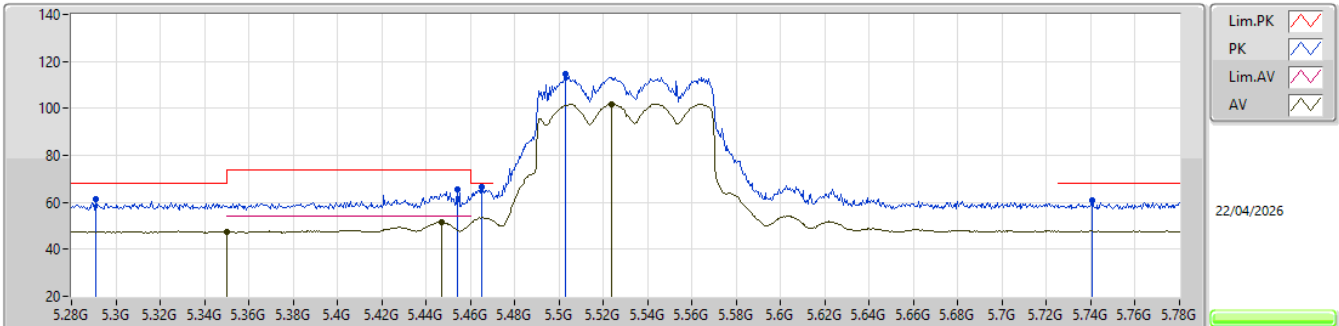


EUT_Y_2TX
Setting 22
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.291G	61.36	68.20	-6.84	54.59	3	Vertical	312	2.07	-	34.55	7.12	34.90
AV	5.35G	47.37	54.00	-6.63	40.49	3	Vertical	312	2.07	-	34.60	7.17	34.89
PK	5.454G	65.55	74.00	-8.45	58.48	3	Vertical	312	2.07	-	34.70	7.24	34.87
AV	5.447G	51.57	54.00	-2.43	44.50	3	Vertical	312	2.07	-	34.70	7.24	34.87
PK	5.465G	66.60	68.20	-1.60	59.52	3	Vertical	312	2.07	-	34.70	7.25	34.87
PK	5.503G	114.68	Inf	-Inf	107.57	3	Vertical	312	2.07	-	34.69	7.28	34.86
AV	5.5235G	101.73	Inf	-Inf	94.70	3	Vertical	312	2.07	-	34.61	7.29	34.87
PK	5.7405G	61.00	68.20	-7.20	54.17	3	Vertical	312	2.07	-	34.30	7.46	34.93

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5530MHz_TX

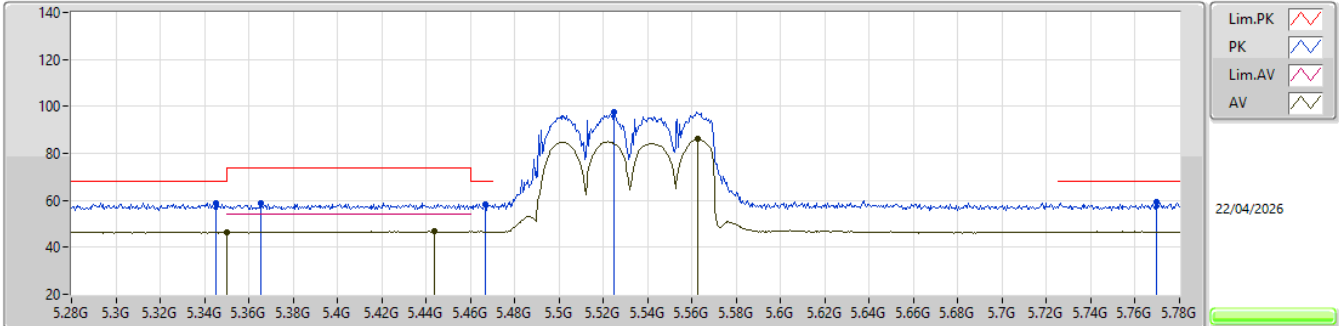


EUT_Y_2TX
Setting 22
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.345G	58.93	68.20	-9.27	52.06	3	Horizontal	37	1.77	-	34.60	7.16	34.89			
AV	5.35G	46.33	54.00	-7.67	39.45	3	Horizontal	37	1.77	-	34.60	7.17	34.89			
PK	5.3655G	58.86	74.00	-15.14	51.94	3	Horizontal	37	1.77	-	34.63	7.18	34.89			
PK	5.467G	58.39	68.20	-9.81	51.31	3	Horizontal	37	1.77	-	34.70	7.25	34.87			
AV	5.444G	46.69	54.00	-7.31	39.63	3	Horizontal	37	1.77	-	34.70	7.23	34.87			
PK	5.525G	97.63	Inf	-Inf	90.61	3	Horizontal	37	1.77	-	34.60	7.29	34.87			
AV	5.5625G	86.10	Inf	-Inf	79.14	3	Horizontal	37	1.77	-	34.52	7.32	34.88			
PK	5.7695G	59.31	68.20	-8.89	52.50	3	Horizontal	37	1.77	-	34.26	7.49	34.94			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5530MHz_TX

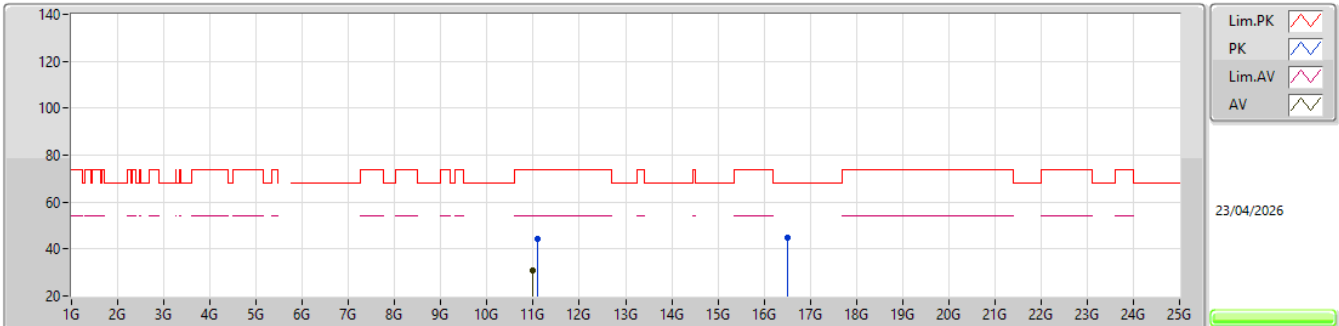


EUT Y_2TX
SET 22
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.10192G	44.41	74.00	-29.59	61.40	3	Vertical	200	1.40	22	38.60	10.62	66.21			
AV	10.9944G	30.69	54.00	-23.31	47.89	3	Vertical	200	1.40	22	38.41	10.58	66.19			
PK	16.5196G	44.72	68.20	-23.48	57.34	3	Vertical	360	2.87	22	38.24	12.63	63.49			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5530MHz_TX

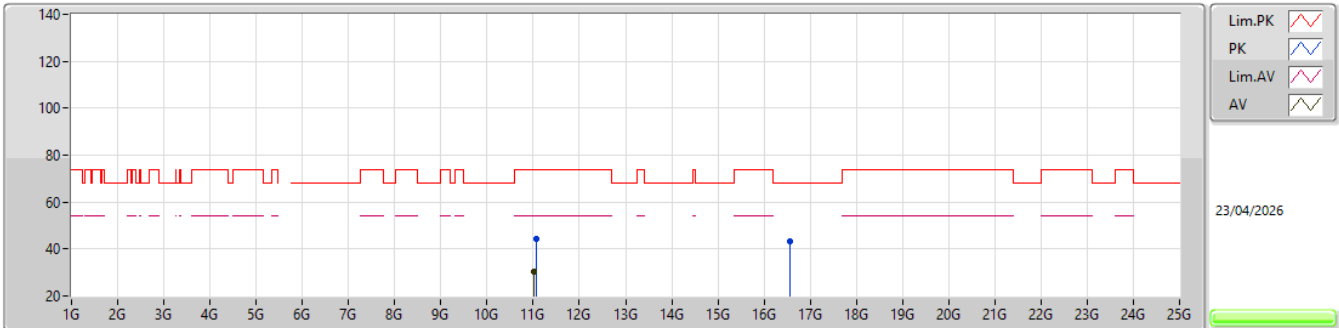EUT Y_2TX
SET 22
03-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.07792G	44.31	74.00	-29.69	61.34	3	Horizontal	56	1.78	22	38.56	10.61	66.20			
AV	11.0032G	30.48	54.00	-23.52	47.66	3	Horizontal	56	1.78	22	38.41	10.59	66.18			
PK	16.56584G	43.44	68.20	-24.76	55.93	3	Horizontal	36	2.95	22	38.36	12.65	63.50			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5610MHz_TX

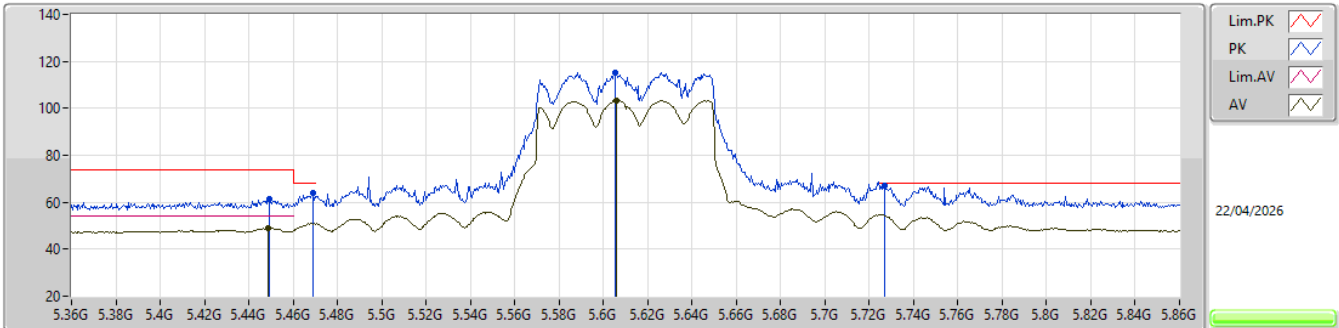


EUT_Y_2TX
Setting 23.5
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.449G	61.62	74.00	-12.38	54.55	3	Vertical	318	2.01	-	34.70	7.24	34.87			
AV	5.4485G	48.93	54.00	-5.07	41.86	3	Vertical	318	2.01	-	34.70	7.24	34.87			
PK	5.469G	63.76	68.20	-4.44	56.68	3	Vertical	318	2.01	-	34.70	7.25	34.87			
PK	5.6055G	115.23	Inf	-Inf	108.18	3	Vertical	318	2.01	-	34.59	7.35	34.89			
AV	5.606G	103.22	Inf	-Inf	96.17	3	Vertical	318	2.01	-	34.59	7.35	34.89			
PK	5.727G	66.98	68.20	-1.22	60.16	3	Vertical	318	2.01	-	34.30	7.45	34.93			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5610MHz_TX

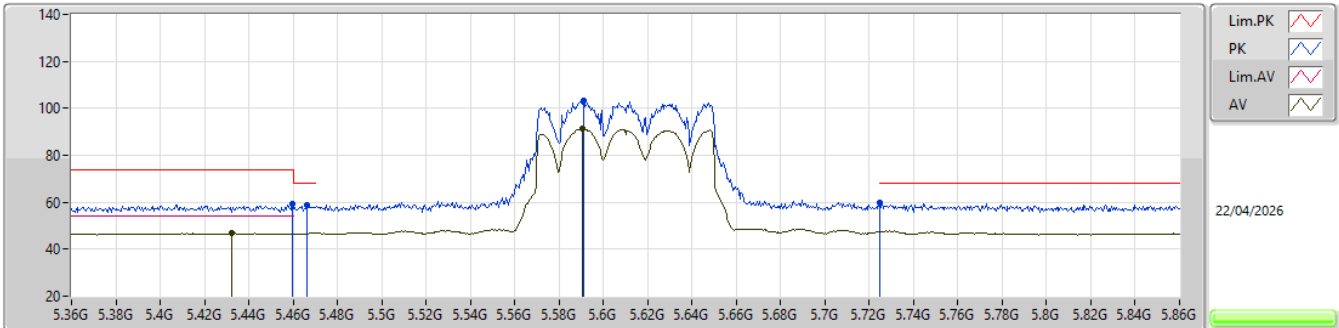


EUT_Y_2TX
Setting 23.5
03-D-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4595G	59.37	74.00	-14.63	52.30	3	Horizontal	24	2.66	-	34.70	7.24	34.87
AV	5.4325G	46.69	54.00	-7.31	39.64	3	Horizontal	24	2.66	-	34.70	7.22	34.87
PK	5.4665G	58.65	68.20	-9.55	51.57	3	Horizontal	24	2.66	-	34.70	7.25	34.87
PK	5.591G	103.31	Inf	-Inf	96.28	3	Horizontal	24	2.66	-	34.58	7.34	34.89
AV	5.5905G	91.19	Inf	-Inf	84.16	3	Horizontal	24	2.66	-	34.58	7.34	34.89
PK	5.725G	59.70	68.20	-8.50	52.88	3	Horizontal	24	2.66	-	34.30	7.45	34.93

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5610MHz_TX

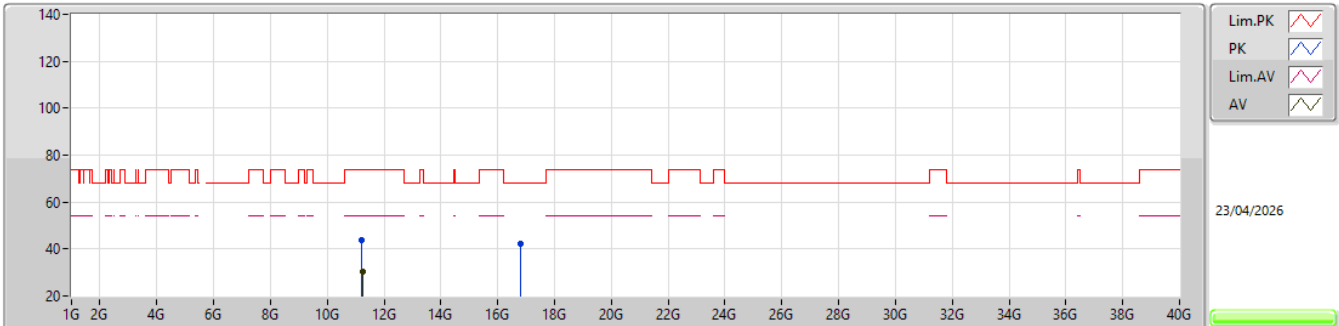


EUT_Y_2TX
Setting 23.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22612G	44.00	74.00	-30.00	58.90	3	Vertical	168	1.33	-	38.95	12.40	66.25			
AV	11.23356G	30.27	54.00	-23.73	45.15	3	Vertical	168	1.33	-	38.97	12.40	66.25			
PK	16.81761G	42.23	68.20	-25.97	50.44	3	Vertical	56	2.08	-	40.37	15.00	63.58			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5610MHz_TX

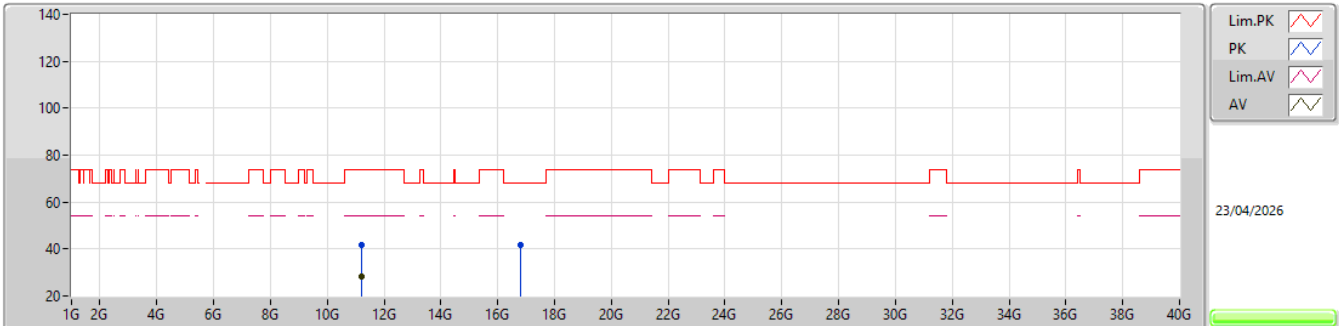


EUT_Y_2TX
Setting 23.5
02-R-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21673G	41.48	74.00	-32.52	56.41	3	Horizontal	107	1.87	-	38.93	12.39	66.25			
AV	11.22345G	28.11	54.00	-25.89	43.01	3	Horizontal	107	1.87	-	38.95	12.40	66.25			
PK	16.82496G	41.74	68.20	-26.46	49.92	3	Horizontal	260	1.67	-	40.40	15.00	63.58			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

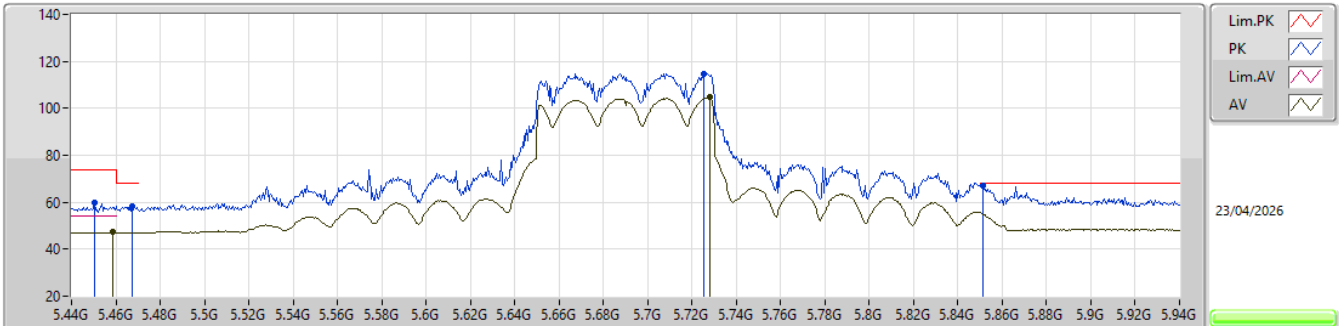


EUT_Y_2TX
Setting 23.5
02-R-S-2-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4505G	60.04	74.00	-13.96	48.95	3	Vertical	23	1.81	-	33.60	7.77	30.28			
AV	5.4585G	47.23	54.00	-6.77	36.09	3	Vertical	23	1.81	-	33.65	7.78	30.29			
PK	5.4675G	58.09	68.20	-10.11	46.90	3	Vertical	23	1.81	-	33.70	7.78	30.29			
PK	5.7255G	114.74	Inf	-Inf	102.69	3	Vertical	23	1.81	-	34.20	8.08	30.23			
AV	5.728G	104.59	Inf	-Inf	92.54	3	Vertical	23	1.81	-	34.20	8.08	30.23			
PK	5.8515G	66.85	68.20	-1.35	54.23	3	Vertical	23	1.81	-	34.61	8.19	30.18			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

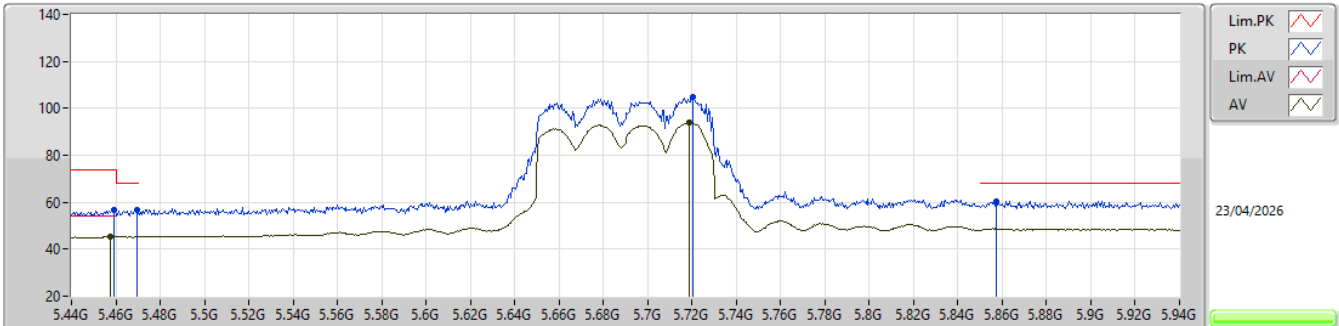


EUT_Y_2TX
Setting 23.5
02-R-S-2-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.459G	56.53	74.00	-17.47	45.39	3	Horizontal	318	2.83	-	33.65	7.78	30.29			
AV	5.4575G	45.38	54.00	-8.62	34.25	3	Horizontal	318	2.83	-	33.65	7.77	30.29			
PK	5.4695G	56.90	68.20	-11.30	45.69	3	Horizontal	318	2.83	-	33.72	7.78	30.29			
PK	5.7205G	104.97	Inf	-Inf	92.93	3	Horizontal	318	2.83	-	34.20	8.07	30.23			
AV	5.719G	93.94	Inf	-Inf	81.90	3	Horizontal	318	2.83	-	34.20	8.07	30.23			
PK	5.8575G	60.52	68.20	-7.68	47.86	3	Horizontal	318	2.83	-	34.66	8.18	30.18			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

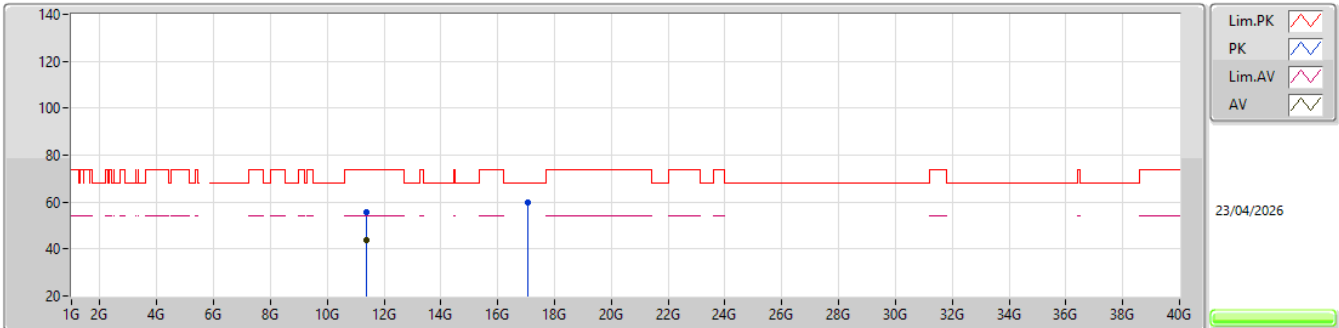


EUT_Y_2TX
Setting 23.5
02-R-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.37472G	55.58	74.00	-18.42	70.26	3	Vertical	353	1.62	-	39.15	12.47	66.30			
AV	11.38388G	43.66	54.00	-10.34	58.35	3	Vertical	353	1.62	-	39.13	12.48	66.30			
PK	17.06378G	59.88	68.20	-8.32	67.49	3	Vertical	299	1.53	-	41.06	15.05	63.72			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

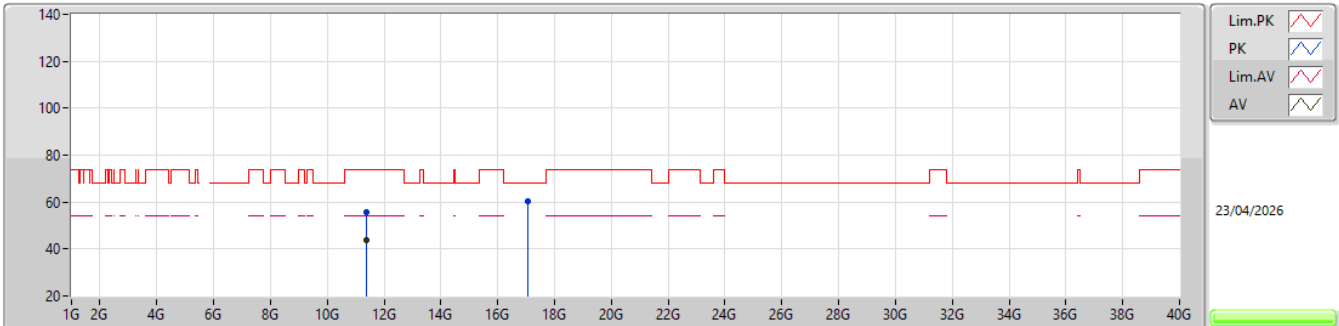


EUT_Y_2TX
Setting 23.5
02-R-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.38466G	55.60	74.00	-18.40	70.29	3	Horizontal	293	1.77	-	39.13	12.48	66.30			
AV	11.37518G	43.61	54.00	-10.39	58.29	3	Horizontal	293	1.77	-	39.15	12.47	66.30			
PK	17.07416G	60.22	68.20	-7.98	67.81	3	Horizontal	232	1.88	-	41.10	15.05	63.74			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

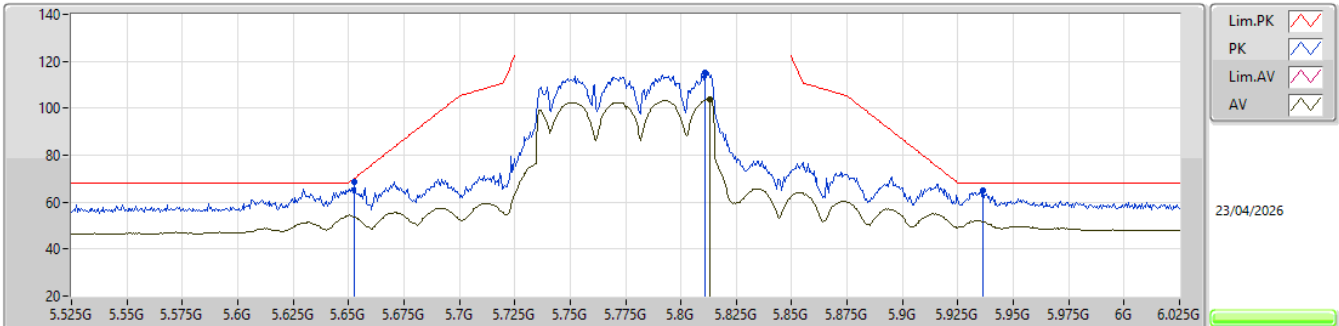


EUT_Y_2TX
Setting 23.5
02-R-S-2-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6525G	68.49	70.05	-1.56	56.69	3	Vertical	21	1.78	-	34.11	7.95	30.26				
PK	5.811G	114.98	Inf	-Inf	102.60	3	Vertical	21	1.78	-	34.37	8.21	30.20				
AV	5.813G	103.80	Inf	-Inf	91.42	3	Vertical	21	1.78	-	34.38	8.20	30.20				
PK	5.9365G	65.05	68.20	-3.15	51.90	3	Vertical	21	1.78	-	35.15	8.15	30.15				

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

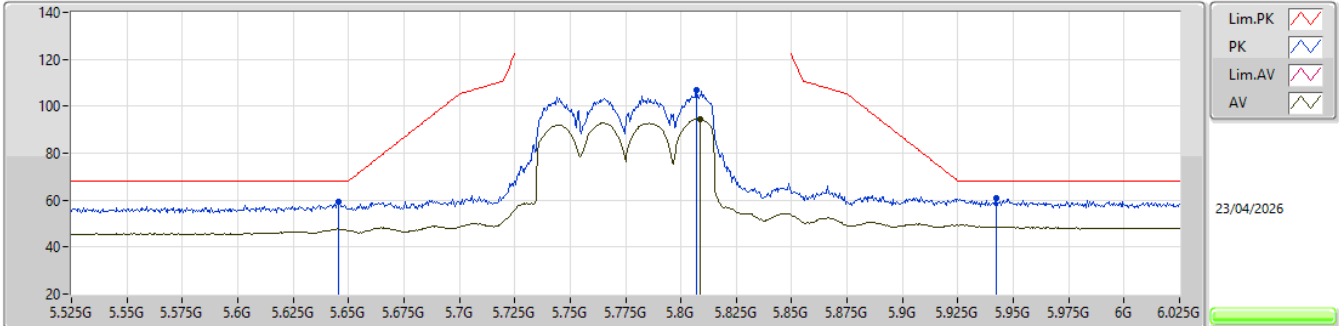


EUT_Y_2TX
Setting 23.5
02-R-S-2-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6455G	59.48	68.20	-8.72	47.71	3	Horizontal	322	2.77	-	34.09	7.94	30.26			
PK	5.807G	106.74	Inf	-Inf	94.39	3	Horizontal	322	2.77	-	34.34	8.21	30.20			
AV	5.8085G	94.62	Inf	-Inf	82.26	3	Horizontal	322	2.77	-	34.35	8.21	30.20			
PK	5.9425G	60.62	68.20	-7.58	47.45	3	Horizontal	322	2.77	-	35.17	8.15	30.15			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

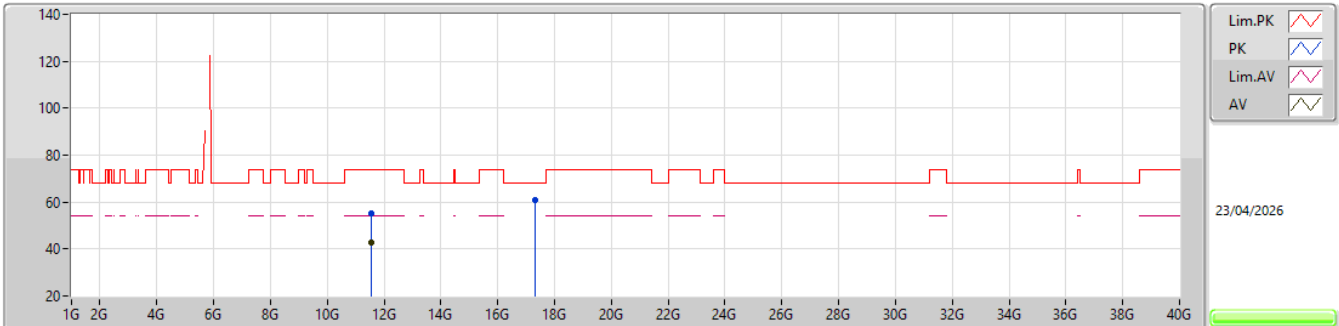


EUT_Y_2TX
Setting 23.5
02-R-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55652G	55.33	74.00	-18.67	70.03	3	Vertical	269	1.53	-	39.10	12.57	66.37			
AV	11.55936G	42.90	54.00	-11.10	57.60	3	Vertical	269	1.53	-	39.10	12.57	66.37			
PK	17.33056G	60.84	68.20	-7.36	67.96	3	Vertical	344	1.38	-	41.90	15.10	64.12			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

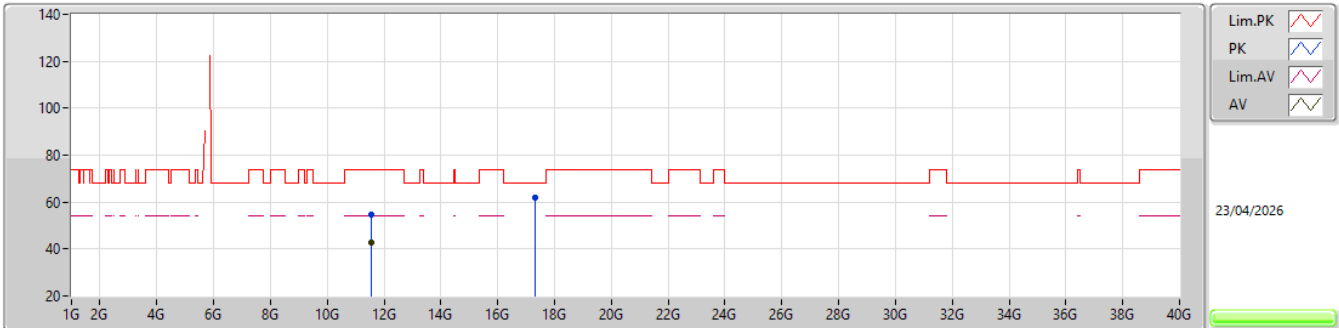


EUT_Y_2TX
Setting 23.5
02-R-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55292G	54.67	74.00	-19.33	69.38	3	Horizontal	52	1.54	-	39.10	12.56	66.37			
AV	11.55908G	42.87	54.00	-11.13	57.57	3	Horizontal	52	1.54	-	39.10	12.57	66.37			
PK	17.3197G	61.67	68.20	-6.53	68.77	3	Horizontal	78	1.55	-	41.90	15.10	64.10			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

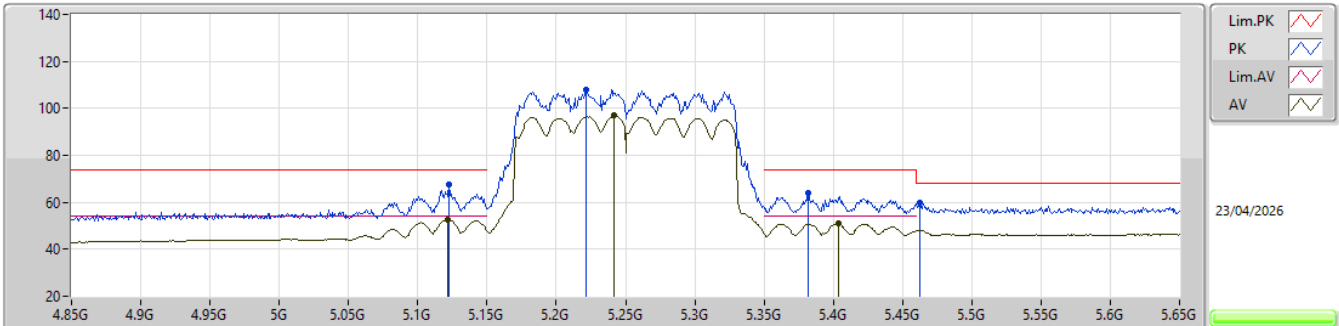


EUT_Y_2TX
Setting 18.5
02-R-S-2-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1228G	67.49	74.00	-6.51	57.18	3	Vertical	21	1.98	-	32.85	7.57	30.11			
AV	5.1212G	52.64	54.00	-1.36	42.34	3	Vertical	21	1.98	-	32.84	7.57	30.11			
PK	5.2212G	108.11	Inf	-Inf	97.69	3	Vertical	21	1.98	-	32.98	7.61	30.17			
AV	5.242G	96.89	Inf	-Inf	86.38	3	Vertical	21	1.98	-	33.07	7.62	30.18			
PK	5.382G	63.89	74.00	-10.11	53.05	3	Vertical	21	1.98	-	33.36	7.73	30.25			
AV	5.4036G	50.89	54.00	-3.11	40.00	3	Vertical	21	1.98	-	33.41	7.74	30.26			
PK	5.4628G	59.92	68.20	-8.28	48.75	3	Vertical	21	1.98	-	33.68	7.78	30.29			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

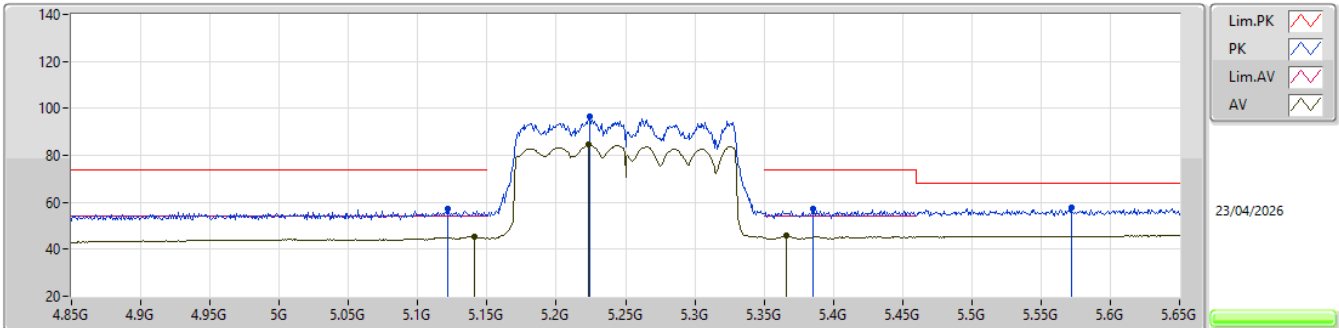


EUT_Y_2TX
Setting 18.5
02-R-S-2-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1212G	57.06	74.00	-16.94	46.76	3	Horizontal	288	1.93	-	32.84	7.57	30.11			
AV	5.1412G	45.14	54.00	-8.86	34.80	3	Horizontal	288	1.93	-	32.88	7.58	30.12			
PK	5.2244G	96.40	Inf	-Inf	85.96	3	Horizontal	288	1.93	-	33.00	7.61	30.17			
AV	5.2236G	84.44	Inf	-Inf	74.01	3	Horizontal	288	1.93	-	32.99	7.61	30.17			
PK	5.3852G	57.39	74.00	-16.61	46.54	3	Horizontal	288	1.93	-	33.37	7.73	30.25			
AV	5.366G	45.62	54.00	-8.38	34.82	3	Horizontal	288	1.93	-	33.33	7.71	30.24			
PK	5.5716G	57.57	68.20	-10.63	46.01	3	Horizontal	288	1.93	-	34.00	7.84	30.28			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

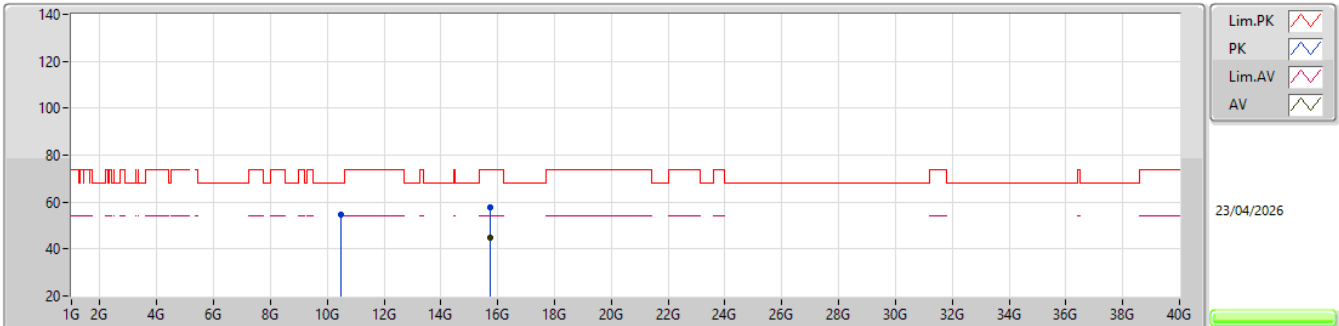


EUT_Y_2TX
Setting 18.5
02-R-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.50426G	54.78	68.20	-13.42	70.30	3	Vertical	177	2.02	-	39.11	12.03	66.66			
PK	15.74478G	57.75	74.00	-16.25	68.70	3	Vertical	81	1.86	-	38.39	14.61	63.95			
AV	15.74664G	45.02	54.00	-8.98	55.97	3	Vertical	81	1.86	-	38.39	14.61	63.95			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

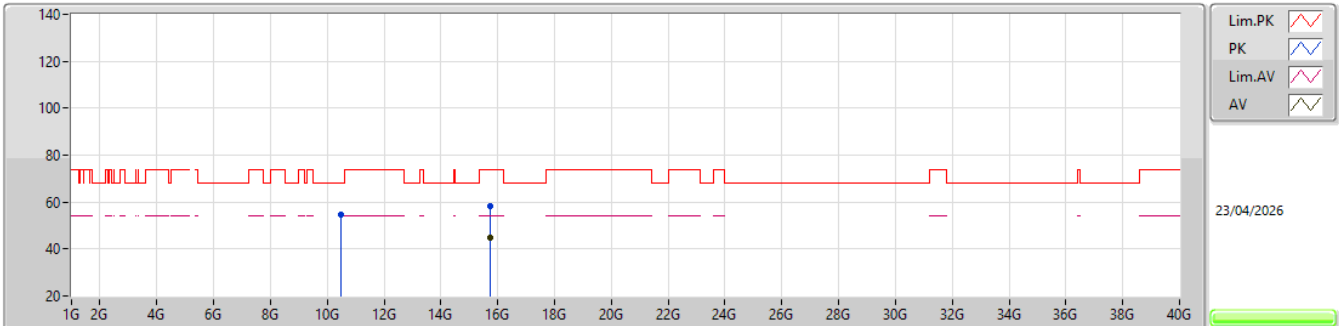

EUT_Y_2TX
Setting 18.5
02-R-S-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50074G	54.61	68.20	-13.59	70.14	3	Horizontal	165	2.00	-	39.10	12.03	66.66			
PK	15.74698G	58.14	74.00	-15.86	69.09	3	Horizontal	198	1.88	-	38.39	14.61	63.95			
AV	15.7522G	45.08	54.00	-8.92	56.01	3	Horizontal	198	1.88	-	38.40	14.62	63.95			



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	2.9261G	31.31	54.00	-22.69	Vertical

Mode 1

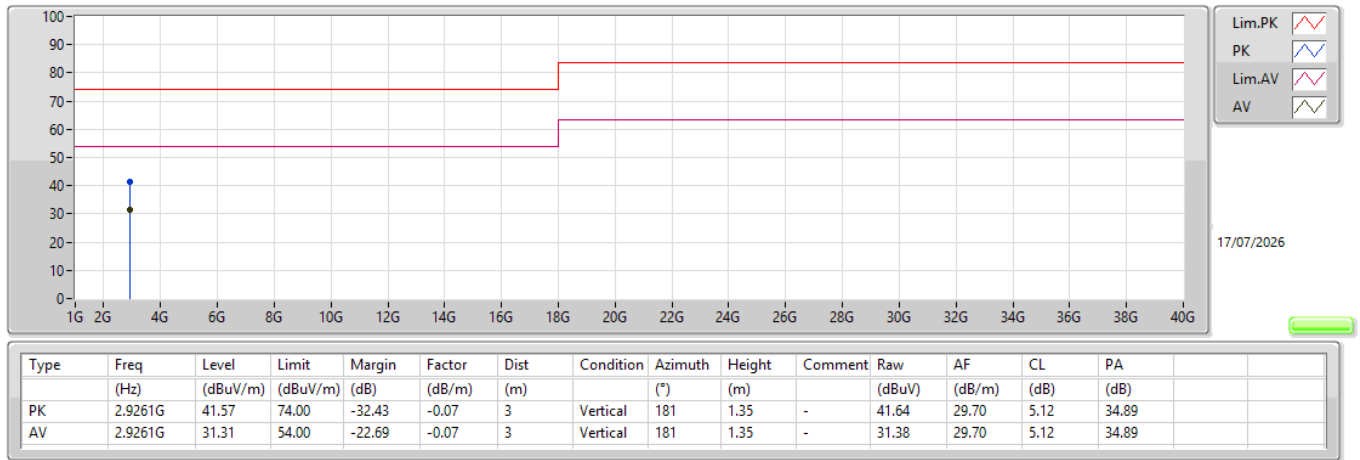

Mode 1

