

FCC Radio Test Report

FCC ID : TVE-260105
Equipment : Secured Wireless Access Point
Brand Name : FORTINET
Model Name : FAP-221Kxxxxxxxxxx, FortiAP 221Kxxxxxxxxxx,
FORTIAP-221Kxxxxxxxxxx
(Where "x" can be used as "A-Z", or "0-9", or "-", or
blank for software changes or marketing purposes only)
Applicant : Fortinet, Inc.
909 Kifer Road, Sunnyvale, CA 94086, USA
Manufacturer : Fortinet, Inc.
909 Kifer Road, Sunnyvale, CA 94086, USA
Standard : 47 CFR FCC Part 15.407

The product was received on Dec. 24, 2025, and testing was started from Jan. 10, 2026 and completed on Feb. 03, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	11
1.3 Testing Location Information	11
1.4 Measurement Uncertainty	11
2 TEST CONFIGURATION OF EUT.....	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration	15
2.3 Accessories	16
2.4 Support Equipment.....	16
2.5 Test Setup Diagram	17
3 TRANSMITTER TEST RESULT	18
3.1 AC Power-line Conducted Emissions	18
3.2 Emission Bandwidth	20
3.3 Maximum Conducted Output Power & EIRP	21
3.4 Peak Power Spectral Density & EIRP Power Spectral Density	23
3.5 Unwanted Emissions.....	25
4 TEST EQUIPMENT AND CALIBRATION DATA.....	29
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF EMISSION BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER & EIRP	
APPENDIX D. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY & EIRP POWER SPECTRAL DENSITY	
APPENDIX E. TEST RESULTS OF UNWANTED EMISSIONS	
APPENDIX F. TEST RESULTS OF RADIATED EMISSION CO-LOCATION	
APPENDIX G. TEST PHOTOS	
PHOTOGRAPHS OF EUT v01	



History of this test report

TEL : 886-3-3273456
FAX : 886-3-3270973
Report Template No.: HE1-D1 Ver4.6
FCC ID: TVE-260105

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Conducted Output Power	PASS	-
3.4	15.407(a)	Peak Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Barry Hsiao

Report Producer: Michelle Tsai

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5700	100-140 [11]
Straddle 5720		5720	144 [1]
5725-5850		5745-5825	149-165 [5]
5850-5895		5845-5885	169-177 [3]
5150-5250	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5670	102-134 [5]
Straddle 5710		5710	142 [1]
5725-5850		5755-5795	151-159 [2]
5850-5895		5835-5875	167-175 [2]
5150-5250	ac (VHT80), ax (HEW80), be (EHT80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5610	106-122 [2]
Straddle 5690		5690	138 [1]
5725-5850		5775	155 [1]
5850-5895		5855	171 [1]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]
5470-5725		5570	114 [1]
5850-5895		5815	163 [1]

**Non-Beamforming**

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	2TX
5.25-5.35GHz	802.11a	20	2TX
5.47-5.725GHz	802.11a	20	2TX
5.85-5.895GHz	802.11a	20	2TX
5.725-5.85GHz	802.11a	20	2TX
5.15-5.25GHz	802.11be EHT20	20	2TX
5.25-5.35GHz	802.11be EHT20	20	2TX
5.47-5.725GHz	802.11be EHT20	20	2TX
5.85-5.895GHz	802.11be EHT20	20	2TX
5.725-5.85GHz	802.11be EHT20	20	2TX
5.15-5.25GHz	802.11be EHT40	40	2TX
5.25-5.35GHz	802.11be EHT40	40	2TX
5.47-5.725GHz	802.11be EHT40	40	2TX
5.85-5.895GHz	802.11be EHT40	40	2TX
5.725-5.85GHz	802.11be EHT40	40	2TX
5.15-5.25GHz	802.11be EHT80	80	2TX
5.25-5.35GHz	802.11be EHT80	80	2TX
5.47-5.725GHz	802.11be EHT80	80	2TX
5.85-5.895GHz	802.11be EHT80	80	2TX
5.725-5.85GHz	802.11be EHT80	80	2TX
5.15-5.25GHz	802.11be EHT160	160	2TX
5.25-5.35GHz	802.11be EHT160	160	2TX
5.47-5.725GHz	802.11be EHT160	160	2TX
5.85-5.895GHz	802.11be EHT160	160	2TX

Beamforming

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11be EHT20-BF	20	2TX
5.25-5.35GHz	802.11be EHT20-BF	20	2TX
5.47-5.725GHz	802.11be EHT20-BF	20	2TX
5.85-5.895GHz	802.11be EHT20-BF	20	2TX
5.725-5.85GHz	802.11be EHT20-BF	20	2TX
5.15-5.25GHz	802.11be EHT40-BF	40	2TX
5.25-5.35GHz	802.11be EHT40-BF	40	2TX
5.47-5.725GHz	802.11be EHT40-BF	40	2TX
5.85-5.895GHz	802.11be EHT40-BF	40	2TX
5.725-5.85GHz	802.11be EHT40-BF	40	2TX
5.15-5.25GHz	802.11be EHT80-BF	80	2TX
5.25-5.35GHz	802.11be EHT80-BF	80	2TX
5.47-5.725GHz	802.11be EHT80-BF	80	2TX
5.85-5.895GHz	802.11be EHT80-BF	80	2TX
5.725-5.85GHz	802.11be EHT80-BF	80	2TX
5.15-5.25GHz	802.11be EHT160-BF	160	2TX
5.25-5.35GHz	802.11be EHT160-BF	160	2TX
5.47-5.725GHz	802.11be EHT160-BF	160	2TX
5.85-5.895GHz	802.11be EHT160-BF	160	2TX

Note:

- 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- VHT20, VHT40, VHT80, VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- HEW20, HEW40, HEW80, HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80, EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.
- Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160/HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

1.1.2 Antenna Information

Ant.	Brand Name	Model Name	Antenna Type	Connector	Support	Radio
1	WNC	95XPAD15.GEE	PIFA	I-Pex	2.4G+5G	Radio 1:2.4G Radio 2:5G
2	WNC	95XPAD15.GEF	PIFA	I-Pex	2.4G+5G	Radio 1:2.4G Radio 2:5G
3	WNC	95XPAD15.GEG	PIFA	I-Pex	BT	BT

Ant.	Port	Gain (dBi)						
		2.4G	5G					BT
			UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-4	
1	1	5.76	5.99	5.46	4.39	4.86	4.76	-
2	2	3.47	4.41	4.31	4.54	4.35	3.83	-
3	1	-	-	-	-	-	-	3.57

Note 1: The EUT has three antennas.

For 2.4GHz function:

For IEEE 802.11 b/g/n/ax/be mode (2TX/2RX)

Ant. 1 (port 1), Ant. 2 (port 2) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (2TX/2RX)

Ant. 1 (port 1), Ant. 2 (port 2) could transmit/receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 3 (port 1) could transmit/receive.

1.1.3 EUT Information

Operational Condition			
EUT Power Type	From AC Adapter		
EUT Function	☐ Outdoor AP	☒ Indoor AP	
	☐ Fixed P2P AP	☐ Client	
Beamforming Function	☒ With beamforming	☐ Without beamforming	
TPC Function	☒ With TPC Function	☐ Without TPC Function	
Weather Band	☒ With 5600~5650MHz	☐ Without 5600~5650MHz	
Resource Unit	☒ Full RU	☐ Partial RU	
	☐ MRU(static preamble puncturing)	☐ MRU(dynamic preamble puncturing)	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:		...
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

1.1.4 Mode Test Duty Cycle

Non-Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_2TX	0.992	0.03	1.981m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT160_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)

Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)

1.1.5 Table for Multiple Listing

Model Name	Description
FAP-221Kxxxxxxxxxx	All the models are identical, the difference model served as marketing strategy.
FortiAP 221Kxxxxxxxxxx	
FORTIAP-221Kxxxxxxxxxx	

Note 1: Where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only.

Note 2: From the above models, model: FAP-221K was selected as representative model for the test and its data was recorded in this report.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 414788 D01 v01r01
- ♦ KDB 412172 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Simon Cheng	17.3~18.1℃ / 55~62%	15/Jan/2026
RF Conducted	TH01-HY	Sonic Li	23.4~23.8℃ / 54~57%	15/Jan/2026~16/Jan/2026
Radiated	03CH03-HY	Simon Cheng	22.2~23.4℃ / 50~52%	10/Jan/2026~14/Jan/2026
Radiated (Co-Location)	03CH03-HY	Simon Cheng	22.3~24.1℃ / 50~54%	03/Feb/2026
☐ Wen 33rd.St. (TAF: 3785)	ADD: No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)			
	TEL: 886-3-318-0787		FAX: 886-3-318-0287	
Test site Designation No. TW0008 with FCC.				

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	3.44 dB	Confidence levels of 95%
Conducted Output Power	1.48 dB	Confidence levels of 95%
Bandwidth	0.05 MHz	Confidence levels of 95%
Conducted Emission	1.48 dB	Confidence levels of 95%
Power Spectral Density	1.22 dB	Confidence levels of 95%
Radiated Emission (9 kHz ~ 30 MHz)	2.9 dB	Confidence levels of 95%
Radiated Emission (30 MHz ~ 1 GHz)	5.64 dB	Confidence levels of 95%
Radiated Emission (1 GHz ~ 18 GHz)	5.02 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	5.28 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	qdart_conn.win.1.0_installer_00099
-----------------------	------------------------------------

Non-Beamforming

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5180MHz	23
5200MHz	23
5240MHz	23.5
5260MHz	18
5300MHz	18
5320MHz	18.5
5500MHz	18
5580MHz	17.5
5700MHz	17
5720MHz Straddle 5.47-5.725GHz	17
5720MHz Straddle 5.725-5.85GHz	17
5745MHz	25
5785MHz	25.5
5825MHz	25.5
5845MHz	20.5
5865MHz	21
5885MHz	21
802.11be EHT20_Nss1,(MCS0)_2TX	-
5180MHz	23.5
5200MHz	23.5
5240MHz	24
5260MHz	18.5
5300MHz	18.5
5320MHz	19
5500MHz	18.5
5580MHz	18
5700MHz	17.5
5720MHz Straddle 5.47-5.725GHz	17.5
5720MHz Straddle 5.725-5.85GHz	17.5
5745MHz	24
5785MHz	25.5
5825MHz	25
5845MHz	21



5865MHz	21.5
5885MHz	21
802.11be EHT40_Nss1,(MCS0)_2TX	-
5190MHz	21
5230MHz	25
5270MHz	20.5
5310MHz	20.5
5510MHz	20.5
5550MHz	20.5
5670MHz	20
5710MHz Straddle 5.47-5.725GHz	20
5710MHz Straddle 5.725-5.85GHz	20
5755MHz	23.5
5795MHz	23.5
5835MHz	24
5875MHz	24
802.11be EHT80_Nss1,(MCS0)_2TX	-
5210MHz	20.5
5290MHz	21
5530MHz	21
5610MHz	21
5690MHz Straddle 5.47-5.725GHz	21
5690MHz Straddle 5.725-5.85GHz	21
5775MHz	21.5
5855MHz	23.5
802.11be EHT160_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	18.5
5250MHz Straddle 5.25-5.35GHz	18.5
5570MHz	18
5815MHz	19

Beamforming

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-
5180MHz	23.5
5200MHz	23.5
5240MHz	24
5260MHz	18.5
5300MHz	18.5
5320MHz	19
5500MHz	18.5
5580MHz	18
5700MHz	17.5



5720MHz Straddle 5.47-5.725GHz	17.5
5720MHz Straddle 5.725-5.85GHz	17.5
5745MHz	24
5785MHz	24.5
5825MHz	24.5
5845MHz	21
5865MHz	21.5
5885MHz	21
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-
5190MHz	21
5230MHz	24
5270MHz	18
5310MHz	18
5510MHz	18.5
5550MHz	18.5
5670MHz	18.5
5710MHz Straddle 5.47-5.725GHz	19.5
5710MHz Straddle 5.725-5.85GHz	19.5
5755MHz	23.5
5795MHz	23.5
5835MHz	24
5875MHz	24
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-
5210MHz	20.5
5290MHz	18.5
5530MHz	19
5610MHz	19
5690MHz Straddle 5.47-5.725GHz	19
5690MHz Straddle 5.725-5.85GHz	19
5775MHz	21.5
5855MHz	23.5
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	18.5
5250MHz Straddle 5.25-5.35GHz	18.5
5570MHz	18
5815MHz	19

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter Mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	CTX
1	Radio 1:2.4G + Radio 2:5G + Bluetooth
Refer to Sporton Test Report No.: FA5D1918 for Co-location RF Exposure Evaluation and Appendix F for Radiated Emission Co-location.	

2.3 Accessories

Accessories				
Mounting Bracket	Brand Name	Qisda	Model Name	6B.PRANQ.009

Reminder: Regarding to more detail and other information, please refer to user manual.


2.4 Support Equipment

Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC Adapter	ASIAN	WA-48A12R	-	Provided by Customer

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	AC Adapter	ASIAN	WA-48A12R	-	Provided by Customer
4	PoE	Microsemi	PD-9001GR/AT/AC	-	Provided by Customer

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC Adapter	ASIAN	WA-48A12R	-	Provided by Customer

2.5 Test Setup Diagram

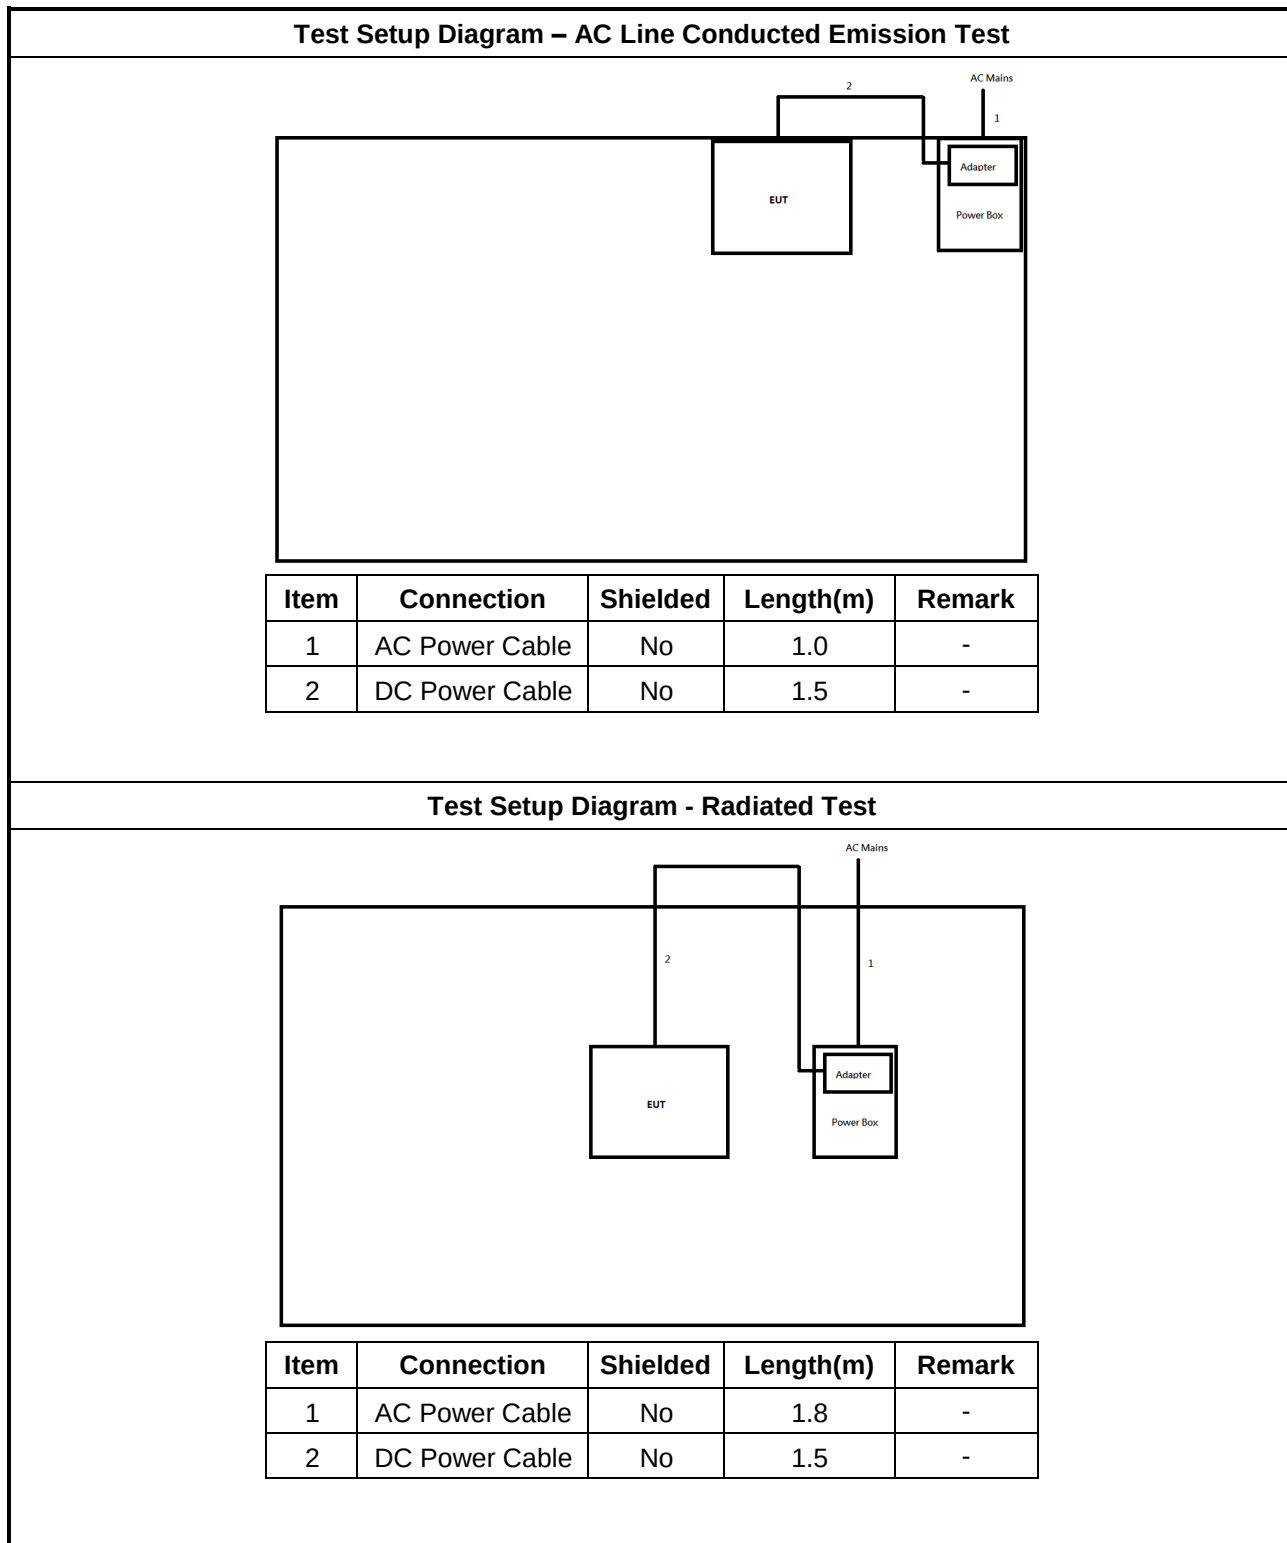

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

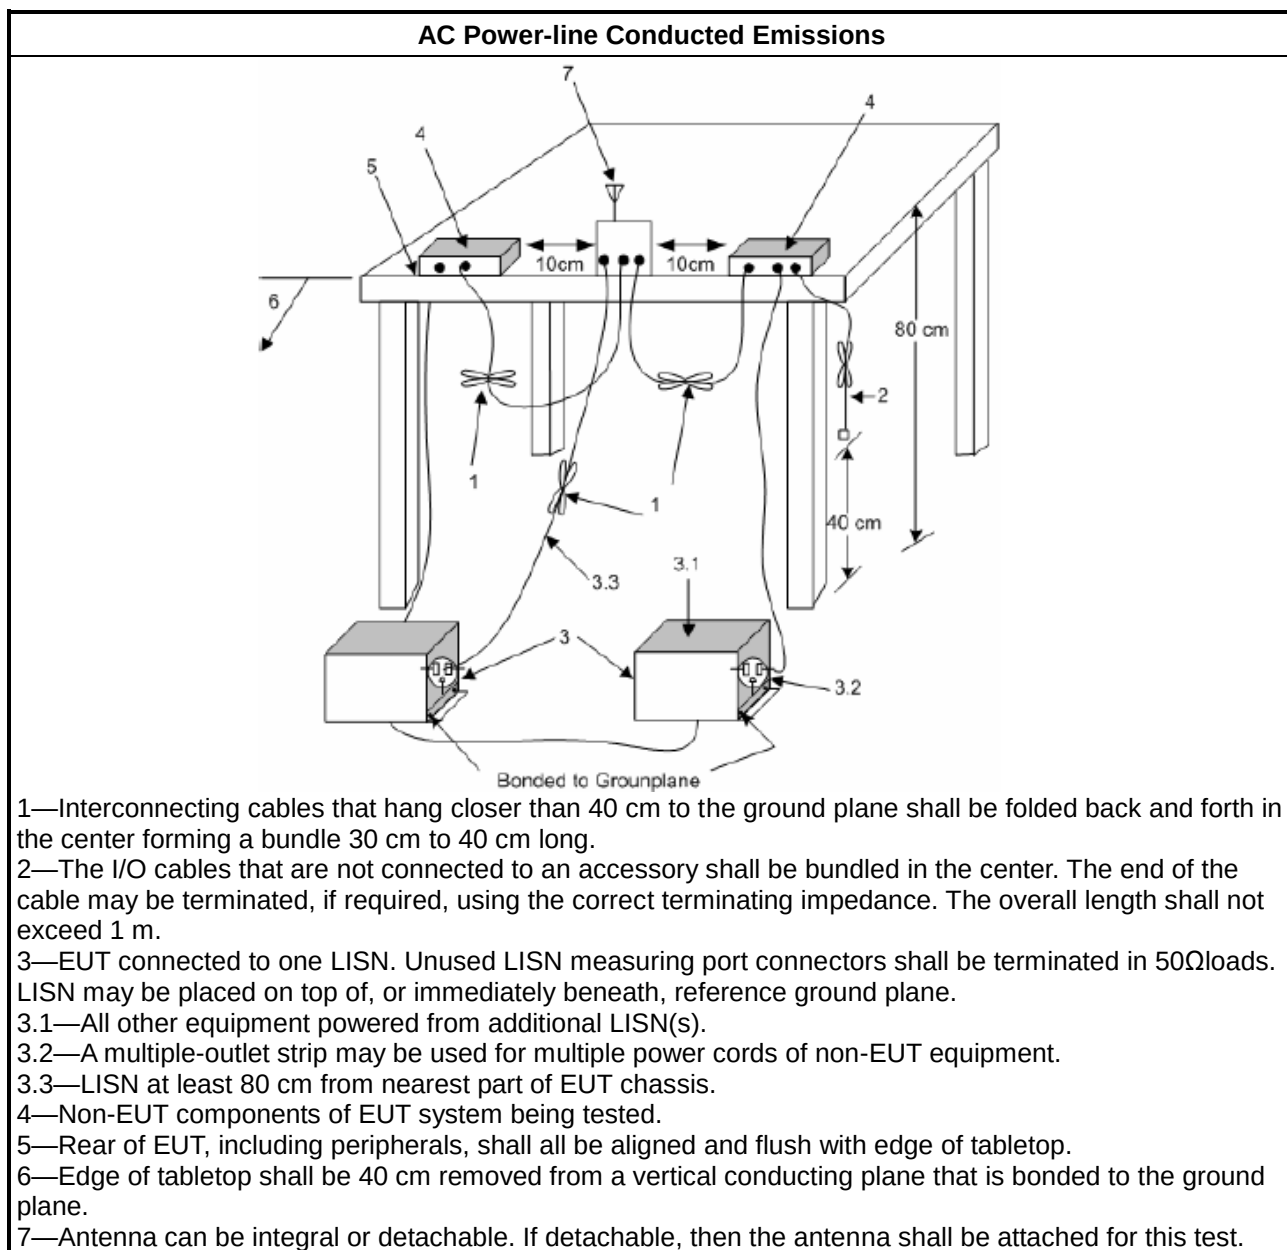

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, N/A
☒	For the 5.47-5.725 GHz band, N/A
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.
☒	For the 5.85-5.895 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

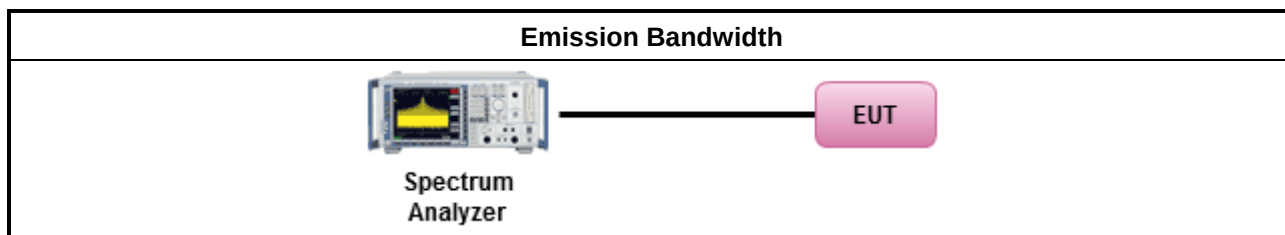

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power & EIRP

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
☐	Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm]
☐	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
☐	Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
☐	Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.725-5.85 GHz band:
☐	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed 1 W.
Maximum EIRP Limit	
☒	For the 5.85-5.895 GHz band:
☐	Indoor AP & subordinate device < 36 dBm
☐	Client device < 30 dBm
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
Maximum Conducted Output Power	
	Duty cycle $\geq 98\%$
☒	Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
☐	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as KDB 789033, clause E Method PM (using an RF average power meter).
For conducted measurement.	
	If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

For Straddle channel

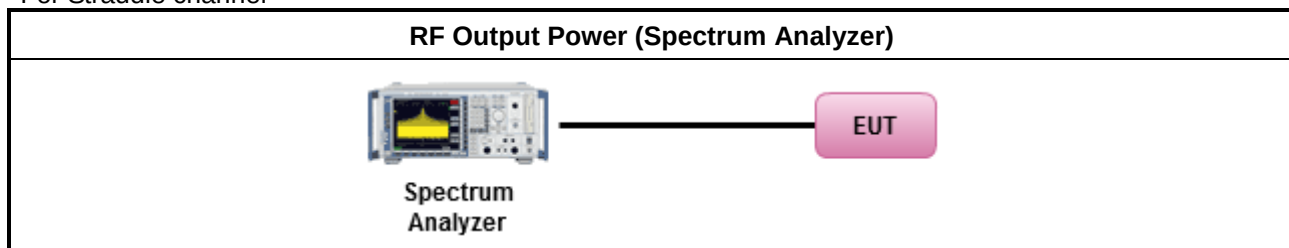

For Other channel

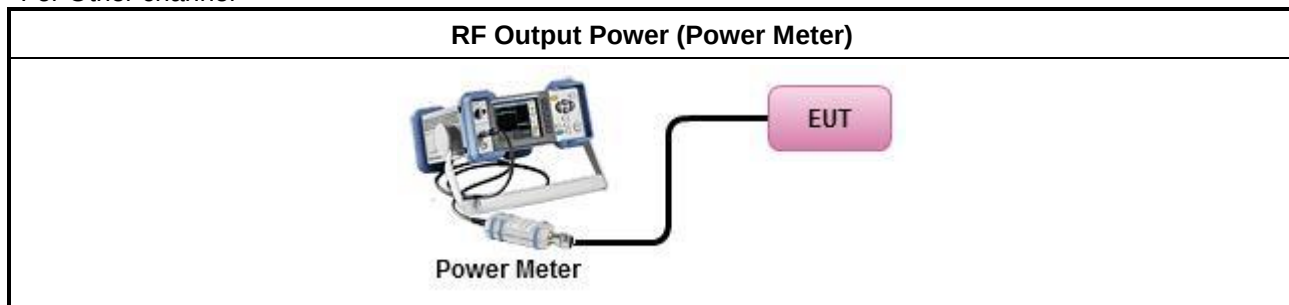

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Peak Power Spectral Density & EIRP Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
☐	- Outdoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Indoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Point-to-point AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. - Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.725-5.85 GHz band:
☐	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
EIRP Power Spectral Density Limit	
☒	For the 5.85-5.895 GHz band:
☐	- Indoor AP & subordinate device < 20dBm/MHz - Client device < 14dBm/MHz
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐ Refer as KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth	
Duty cycle ≥ 98%	
☒ Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).	
Duty cycle < 98%	
☐ Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)	
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☐ Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

3.4.4 Test Setup

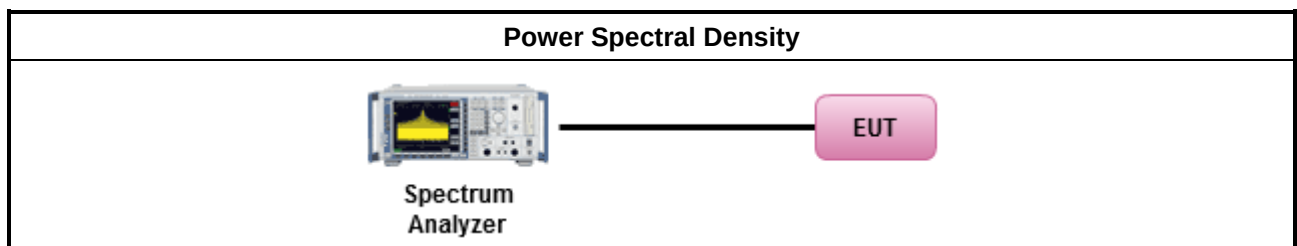

3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix D

3.5 Unwanted Emissions

3.5.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.650-5700 GHz: e.i.r.p. -27 ~ 10 dBm [68.2 ~ 105.2 dBuV/m@3m] 5.700-5720 GHz: e.i.r.p. 10 ~ 15.6 dBm [105.2 ~ 110.8 dBuV/m@3m] 5.720-5725 GHz: e.i.r.p. 15.6 ~ 27 dBm [110.8 ~ 122.2 dBuV/m@3m] 5.850-5.855 GHz: e.i.r.p. 27 ~ 15.6 dBm [122.2 ~ 110.8 dBuV/m@3m] 5.855-5.875 GHz: e.i.r.p. 15.6 ~ 10 dBm [110.8 ~ 105.2 dBuV/m@3m] 5.875-5.925 GHz: e.i.r.p. 10 ~ -27 dBm [105.2 ~ 68.2dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.85 - 5.895 GHz	(i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz. (ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.

	(iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/ MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as KDB 789033, clause G)1) for unwanted emissions into restricted bands.
☒	Refer as KDB 789033, G)6) Method VB (ANSI C63.10, clause 4.1.5.2.3), Reduced VBW.
☒	Refer as KDB 789033, clause G)5) (ANSI C63.10, clause 4.1.5.2.2), measurement procedure peak limit.
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	
Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.


Test Method	
▪	KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.
▪	Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
▪	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.5.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.5.5 Test Setup

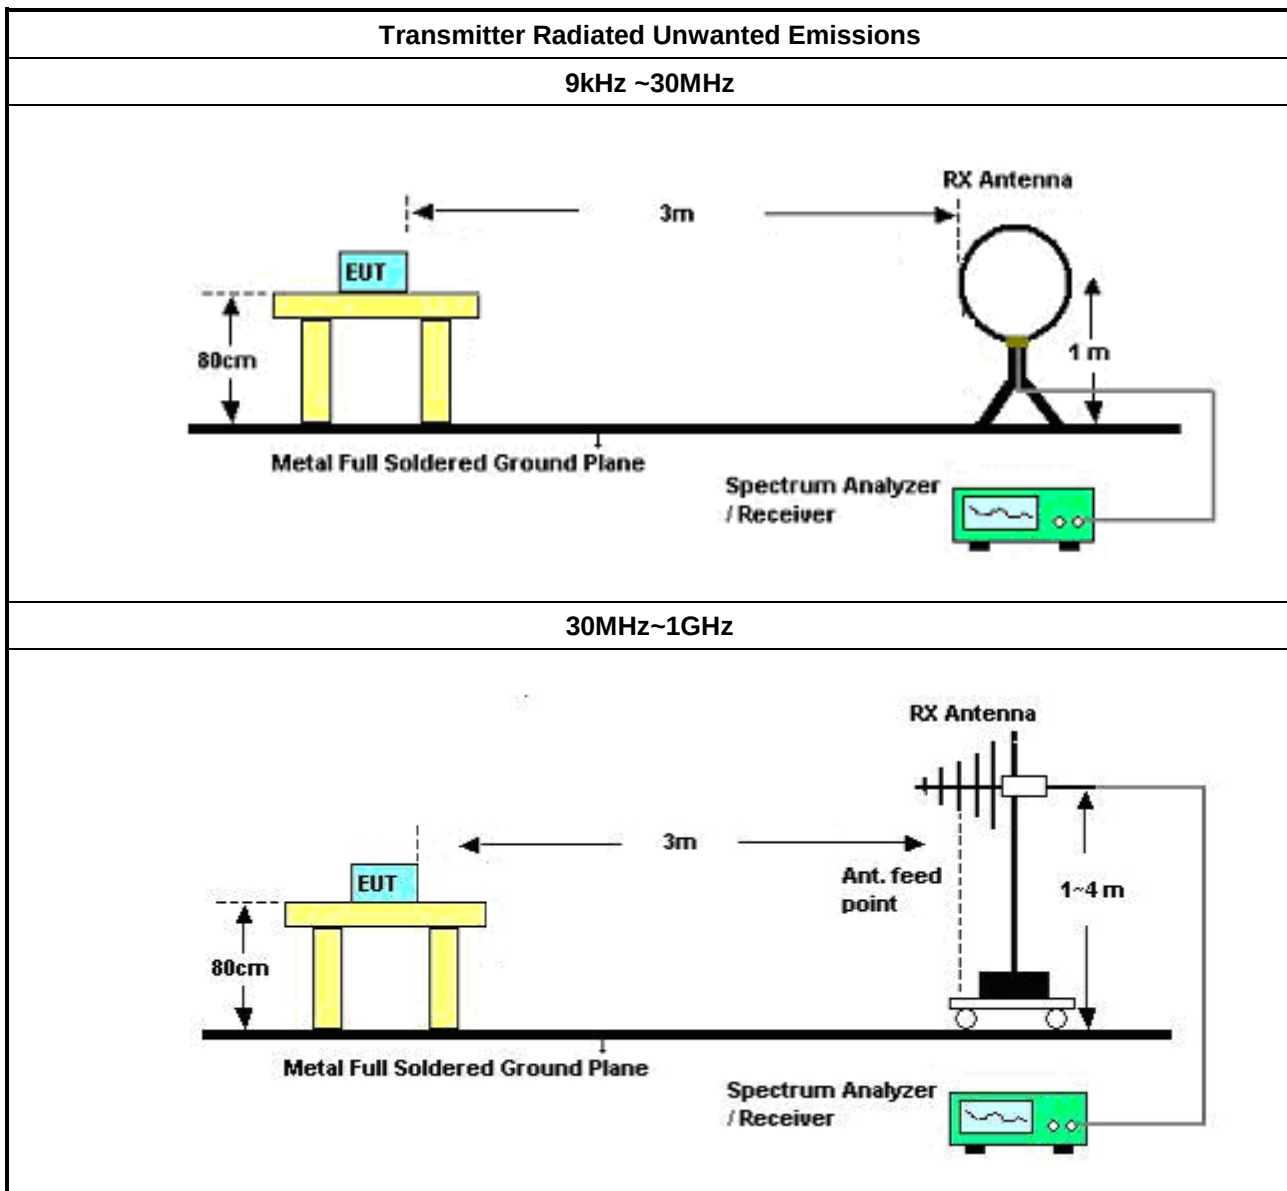

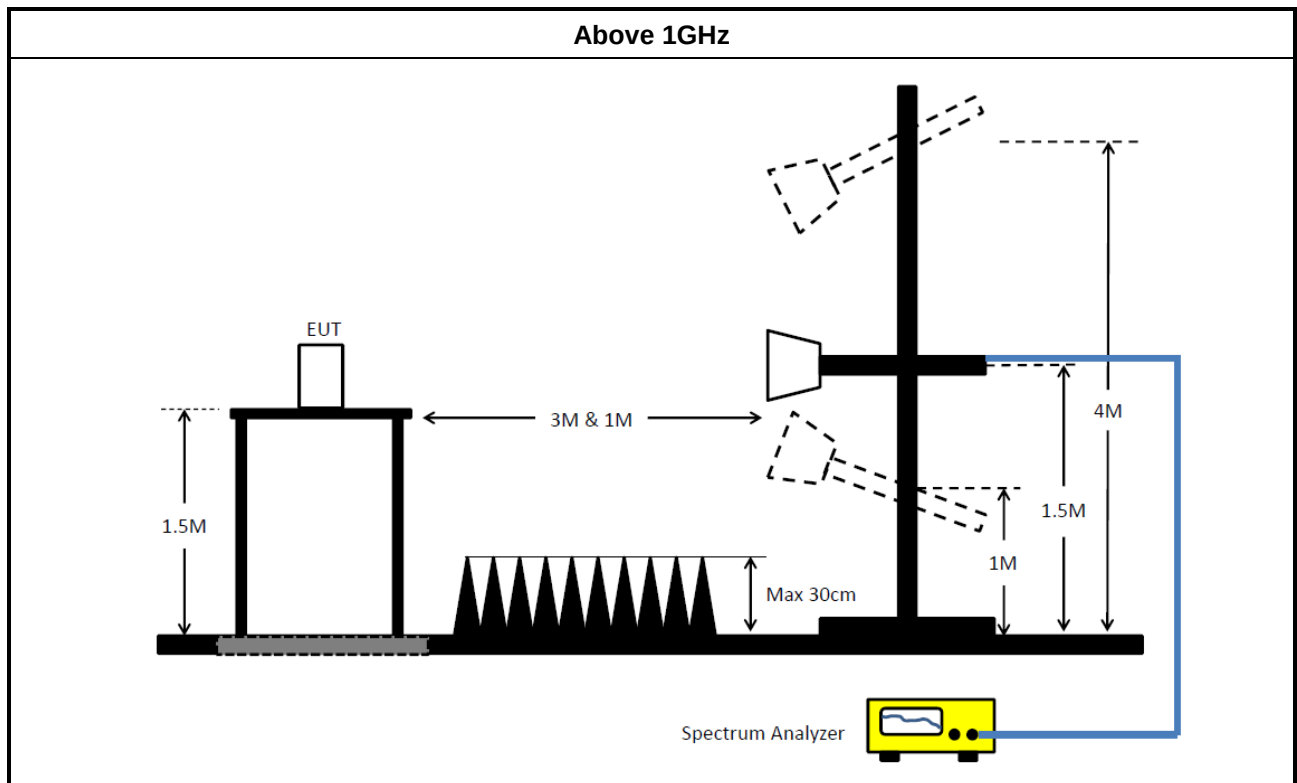

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102051	9kHz ~ 3.6GHz	21/May/2025	20/May/2026
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	101578	9kHz ~ 30MHz	24/Aug/2025	23/Aug/2026
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	26/Feb/2025	25/Feb/2026
Pulse Limiter	SCHWARZBECK	VTSD 9561F-N	1056	9kHz ~ 30MHz	25/Jun/2025	24/Jun/2026
Software	Sporton	SENSE-EMI	V5.11.6	NA	NA	NA

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV3044	101438	10Hz~44GHz	14/Oct/2025	13/Oct/2026
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	29/Oct/2025	28/Oct/2026
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	13/Feb/2025	12/Feb/2026
Pulse Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	13/Feb/2025	12/Feb/2026
SENSE-15407_NII	Sporton	V5.11.27	N/A	N/A	N/A	N/A

Instrument for Radiated Test (Co-Location)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz~18GHz 3m	13/Jul/2025	12/Jul/2026
Signal Analyzer	ROHDE & SCHWARZ	FSV3044	101748	10Hz~44GHz	10/Apr/2025	09/Apr/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02267	1GHz~18GHz	28/Oct/2025	27/Oct/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz ~ 40GHz	02/Jul/2025	01/Jul/2026
RF CABLE 5+8m	HUBER+SUHNER	SUOFLEX_104	03CH03-cable-03	1GHz~40GHz	19/May/2025	18/May/2026
Microwave Prempplier	Agilent	8449B	3008A02326	1GHz~26.5GHz	23/Jul/2025	22/Jul/2026
Microwave Prempplier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~ 40GHz	26/Apr/2025	25/Apr/2026
SENSE-15247_FS	Sporton	V5.11.23	NA	NA	NA	NA

**Instrument for Radiated Test**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz~18GHz 3m	13/Jul/2025	12/Jul/2026
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	13/Jul/2025	12/Jul/2026
EMI Test Receiver	R&S	ESR	102052	9kHz~3.6GHz	14/May/2025	13/May/2026
Signal Analyzer	ROHDE & SCHWARZ	FSV3044	101748	10Hz~44GHz	10/Apr/2025	09/Apr/2026
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	20/Mar/2025	19/Mar/2026
Bilog Antenna & 6dB Attenuator	SCHAFFNER / EMC	CBL6112B / N-6-05	22237 / AT-N-0603	30MHz~1GHz	11/Oct/2025	10/Oct/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02267	1GHz~18GHz	28/Oct/2025	27/Oct/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz ~ 40GHz	02/Jul/2025	01/Jul/2026
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz~30MHz	10/Jun/2025	09/Jun/2026
RF Cable-R03m	Jye Bao	RG142	03CH03-cable-02	30MHz~1GHz	10/Jun/2025	09/Jun/2026
RF CABLE 5+8m	HUBER+SUHNER	SUOFLEX_104	03CH03-cable-03	1GHz~40GHz	19/May/2025	18/May/2026
Amplifier	Agilent	8447D	2944A08033	100kHz~1.3GHz	12/Sep/2025	11/Sep/2026
Microwave Premplifier	Agilent	8449B	3008A02326	1GHz~26.5GHz	23/Jul/2025	22/Jul/2026
Microwave Premplifier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~ 40GHz	26/Apr/2025	25/Apr/2026
SENSE-15407_NII	Sporton	V5.11.27	NA	NA	NA	NA



Conducted Emissions at Powerline

Appendix A


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	151.2k	45.65	65.92	-20.27	Line

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	151.2k	45.65	65.92	-20.27	Line
Mode 1	Pass	AV	151.2k	30.17	55.92	-25.75	Line
Mode 1	Pass	QP	261.26k	31.88	61.39	-29.51	Line
Mode 1	Pass	AV	261.26k	21.97	51.39	-29.42	Line
Mode 1	Pass	QP	391.01k	24.11	58.05	-33.94	Line
Mode 1	Pass	AV	391.01k	18.48	48.05	-29.57	Line
Mode 1	Pass	QP	2.32M	20.87	56.00	-35.13	Line
Mode 1	Pass	AV	2.32M	18.35	46.00	-27.65	Line
Mode 1	Pass	QP	2.82M	18.89	56.00	-37.11	Line
Mode 1	Pass	AV	2.82M	16.59	46.00	-29.41	Line
Mode 1	Pass	QP	6.39M	15.86	60.00	-44.14	Line
Mode 1	Pass	AV	6.39M	15.02	50.00	-34.98	Line
Mode 1	Pass	QP	154.87k	42.86	65.73	-22.87	Neutral
Mode 1	Pass	AV	154.87k	27.39	55.73	-28.34	Neutral
Mode 1	Pass	QP	250.04k	31.12	61.76	-30.64	Neutral
Mode 1	Pass	AV	250.04k	21.95	51.76	-29.81	Neutral
Mode 1	Pass	QP	403.69k	21.33	57.78	-36.45	Neutral
Mode 1	Pass	AV	403.69k	15.61	47.78	-32.17	Neutral
Mode 1	Pass	QP	633.81k	20.20	56.00	-35.80	Neutral
Mode 1	Pass	AV	633.81k	17.29	46.00	-28.71	Neutral
Mode 1	Pass	QP	4.67M	15.13	56.00	-40.87	Neutral
Mode 1	Pass	AV	4.67M	14.74	46.00	-31.26	Neutral
Mode 1	Pass	QP	13.07M	16.37	60.00	-43.63	Neutral
Mode 1	Pass	AV	13.07M	15.31	50.00	-34.69	Neutral

Mode 1

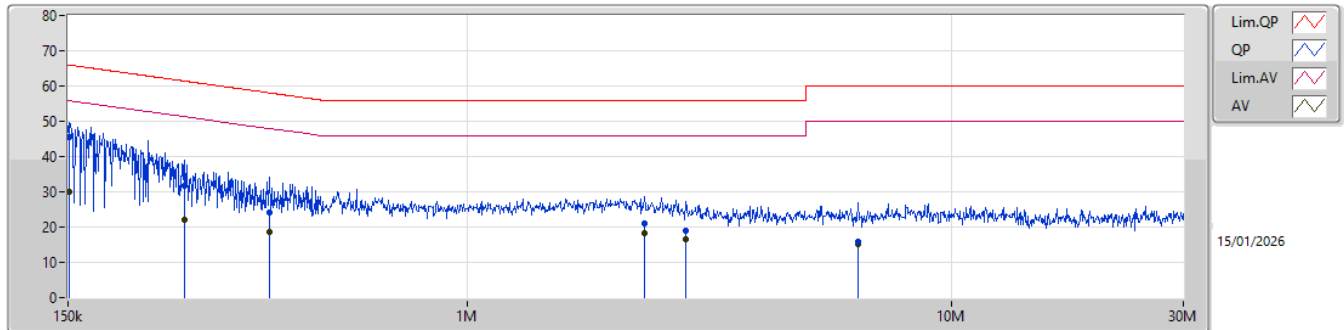

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)								
QP	151.2k	45.65	65.92	-20.27	19.77	Line	25.88	9.64	0.01	10.12								
AV	151.2k	30.17	55.92	-25.75	19.77	Line	10.40	9.64	0.01	10.12								
QP	261.26k	31.88	61.39	-29.51	19.78	Line	12.10	9.64	0.02	10.12								
AV	261.26k	21.97	51.39	-29.42	19.78	Line	2.19	9.64	0.02	10.12								
QP	391.01k	24.11	58.05	-33.94	19.78	Line	4.33	9.63	0.03	10.12								
AV	391.01k	18.48	48.05	-29.57	19.78	Line	-1.30	9.63	0.03	10.12								
QP	2.32M	20.87	56.00	-35.13	19.81	Line	1.06	9.65	0.03	10.13								
AV	2.32M	18.35	46.00	-27.65	19.81	Line	-1.46	9.65	0.03	10.13								
QP	2.82M	18.89	56.00	-37.11	19.82	Line	-0.93	9.65	0.04	10.13								
AV	2.82M	16.59	46.00	-29.41	19.82	Line	-3.23	9.65	0.04	10.13								
QP	6.39M	15.86	60.00	-44.14	19.97	Line	-4.11	9.68	0.15	10.14								
AV	6.39M	15.02	50.00	-34.98	19.97	Line	-4.95	9.68	0.15	10.14								

Mode 1

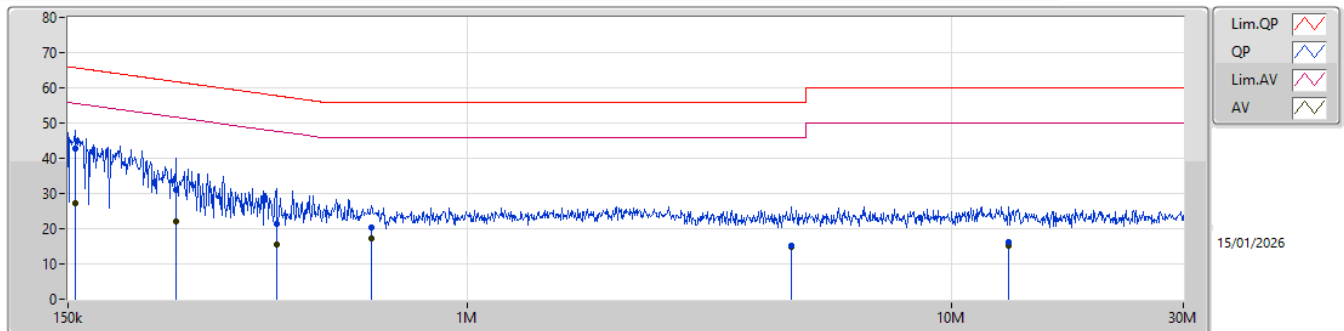

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)								
QP	154.87k	42.86	65.73	-22.87	19.77	Neutral	23.09	9.64	0.01	10.12								
AV	154.87k	27.39	55.73	-28.34	19.77	Neutral	7.62	9.64	0.01	10.12								
QP	250.04k	31.12	61.76	-30.64	19.77	Neutral	11.35	9.63	0.02	10.12								
AV	250.04k	21.95	51.76	-29.81	19.77	Neutral	2.18	9.63	0.02	10.12								
QP	403.69k	21.33	57.78	-36.45	19.78	Neutral	1.55	9.63	0.03	10.12								
AV	403.69k	15.61	47.78	-32.17	19.78	Neutral	-4.17	9.63	0.03	10.12								
QP	633.81k	20.20	56.00	-35.80	19.80	Neutral	0.40	9.64	0.04	10.12								
AV	633.81k	17.29	46.00	-28.71	19.80	Neutral	-2.51	9.64	0.04	10.12								
QP	4.67M	15.13	56.00	-40.87	19.88	Neutral	-4.75	9.67	0.08	10.13								
AV	4.67M	14.74	46.00	-31.26	19.88	Neutral	-5.14	9.67	0.08	10.13								
QP	13.07M	16.37	60.00	-43.63	20.10	Neutral	-3.73	9.70	0.27	10.13								
AV	13.07M	15.31	50.00	-34.69	20.10	Neutral	-4.79	9.70	0.27	10.13								

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.155M	17.064M	17M1D1D	21.505M	16.812M
802.11be EHT20_Nss1,(MCS0)_2TX	22.715M	19.12M	19M1D1D	21.175M	19.032M
802.11be EHT40_Nss1,(MCS0)_2TX	45.21M	38.557M	38M6D1D	42.57M	38.117M
802.11be EHT80_Nss1,(MCS0)_2TX	86.02M	77.864M	77M9D1D	84.48M	77.258M
802.11be EHT160_Nss1,(MCS0)_2TX	89.52M	79.394M	79M4D1D	87.2M	78.949M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.375M	16.993M	17M0D1D	21.505M	16.814M
802.11be EHT20_Nss1,(MCS0)_2TX	23.815M	19.197M	19M2D1D	20.845M	18.993M
802.11be EHT40_Nss1,(MCS0)_2TX	44.44M	38.343M	38M3D1D	43.12M	37.99M
802.11be EHT80_Nss1,(MCS0)_2TX	84.92M	77.762M	77M8D1D	84.48M	77.411M
802.11be EHT160_Nss1,(MCS0)_2TX	88.72M	79.001M	79M0D1D	87.12M	78.554M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.33M	16.991M	17M0D1D	16.155M	13.489M
802.11be EHT20_Nss1,(MCS0)_2TX	22.55M	19.045M	19M0D1D	15.96M	14.417M
802.11be EHT40_Nss1,(MCS0)_2TX	44.33M	38.455M	38M5D1D	37.17M	33.983M
802.11be EHT80_Nss1,(MCS0)_2TX	87.12M	77.872M	77M9D1D	78.375M	73.412M
802.11be EHT160_Nss1,(MCS0)_2TX	171.16M	157.603M	158MD1D	170.28M	157.374M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	16.335M	22.852M	22M9D1D	3.14M	4.925M
802.11be EHT20_Nss1,(MCS0)_2TX	18.92M	21.255M	21M3D1D	4.52M	4.91M
802.11be EHT40_Nss1,(MCS0)_2TX	38.17M	38.549M	38M5D1D	4.06M	5.29M
802.11be EHT80_Nss1,(MCS0)_2TX	78.1M	77.81M	77M8D1D	4.02M	6.314M
5.85-5.895GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	16.335M	16.647M	16M6D1D	12.925M	16.563M
802.11be EHT20_Nss1,(MCS0)_2TX	18.92M	18.993M	19M0D1D	16.94M	18.88M
802.11be EHT40_Nss1,(MCS0)_2TX	38.06M	38.059M	38M1D1D	37.95M	37.951M
802.11be EHT80_Nss1,(MCS0)_2TX	78.1M	77.756M	77M8D1D	75.9M	77.65M
802.11be EHT160_Nss1,(MCS0)_2TX	156.2M	157.092M	157MD1D	150.48M	156.971M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.66M	16.871M	21.505M	16.839M
5200MHz	Pass	Inf	23.155M	17.064M	22.165M	16.901M
5240MHz	Pass	Inf	22M	16.934M	21.615M	16.812M
5260MHz	Pass	Inf	23.375M	16.993M	21.56M	16.871M
5300MHz	Pass	Inf	22.99M	16.923M	21.505M	16.814M
5320MHz	Pass	Inf	22.11M	16.951M	21.505M	16.911M
5500MHz	Pass	Inf	22.275M	16.991M	21.67M	16.846M
5580MHz	Pass	Inf	21.23M	16.883M	21.01M	16.931M
5700MHz	Pass	Inf	22.33M	16.711M	21.12M	16.842M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.155M	13.521M	16.29M	13.489M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.18M	5.057M	3.14M	4.925M
5745MHz	Pass	500k	16.335M	17.218M	16.06M	17.436M
5785MHz	Pass	500k	14.025M	22.852M	12.32M	19.085M
5825MHz	Pass	500k	16.06M	17.735M	15.675M	17.455M
5845MHz	Pass	500k	13.86M	16.59M	15.51M	16.565M
5865MHz	Pass	500k	16.335M	16.563M	15.4M	16.611M
5885MHz	Pass	500k	12.925M	16.647M	15.675M	16.578M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.495M	19.114M	22.11M	19.032M
5200MHz	Pass	Inf	22.715M	19.12M	21.175M	19.051M
5240MHz	Pass	Inf	22.66M	19.101M	22.165M	19.06M
5260MHz	Pass	Inf	23.815M	19.186M	20.845M	19.007M
5300MHz	Pass	Inf	23.1M	19.197M	22.55M	18.993M
5320MHz	Pass	Inf	23.485M	19.183M	21.725M	19.016M
5500MHz	Pass	Inf	22.385M	19.045M	20.9M	18.964M
5580MHz	Pass	Inf	22.55M	19.032M	22.44M	18.987M
5700MHz	Pass	Inf	21.505M	18.939M	20.955M	19.024M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.455M	14.417M	15.96M	14.444M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.52M	4.971M	4.54M	4.91M
5745MHz	Pass	500k	18.865M	18.96M	18.37M	19.092M
5785MHz	Pass	500k	18.095M	21.255M	15.18M	19.342M
5825MHz	Pass	500k	18.92M	19.095M	18.81M	19.097M
5845MHz	Pass	500k	18.865M	18.974M	18.7M	18.993M
5865MHz	Pass	500k	18.425M	18.899M	17.71M	18.973M
5885MHz	Pass	500k	16.94M	18.88M	18.92M	18.947M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	43.34M	38.127M	45.21M	38.209M
5230MHz	Pass	Inf	42.57M	38.117M	43.67M	38.557M
5270MHz	Pass	Inf	44M	38.015M	44.44M	38.343M
5310MHz	Pass	Inf	43.12M	37.99M	44.44M	38.322M
5510MHz	Pass	Inf	43.45M	38.297M	43.78M	38.42M
5550MHz	Pass	Inf	44.33M	38.15M	43.89M	38.356M
5670MHz	Pass	Inf	44.33M	38.346M	43.12M	38.455M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	37.17M	34.022M	37.765M	33.983M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.06M	5.29M	4.06M	5.428M
5755MHz	Pass	500k	38.17M	38.46M	38.06M	38.325M
5795MHz	Pass	500k	37.73M	38.549M	36.63M	38.326M
5835MHz	Pass	500k	38.06M	38.059M	38.06M	37.984M
5875MHz	Pass	500k	37.95M	37.989M	38.06M	37.951M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	86.02M	77.258M	84.48M	77.864M
5290MHz	Pass	Inf	84.48M	77.411M	84.92M	77.762M
5530MHz	Pass	Inf	87.12M	77.46M	84.92M	77.872M
5610MHz	Pass	Inf	86.02M	77.584M	84.92M	77.801M



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	78.375M	73.426M	78.45M	73.412M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.02M	6.448M	4.02M	6.314M
5775MHz	Pass	500k	77.66M	77.81M	78.1M	77.724M
5855MHz	Pass	500k	78.1M	77.756M	75.9M	77.65M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	89.52M	78.949M	87.2M	79.394M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	87.12M	78.554M	88.72M	79.001M
5570MHz	Pass	Inf	170.28M	157.374M	171.16M	157.603M
5815MHz	Pass	500k	150.48M	156.971M	156.2M	157.092M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5200MHz

15/01/2026

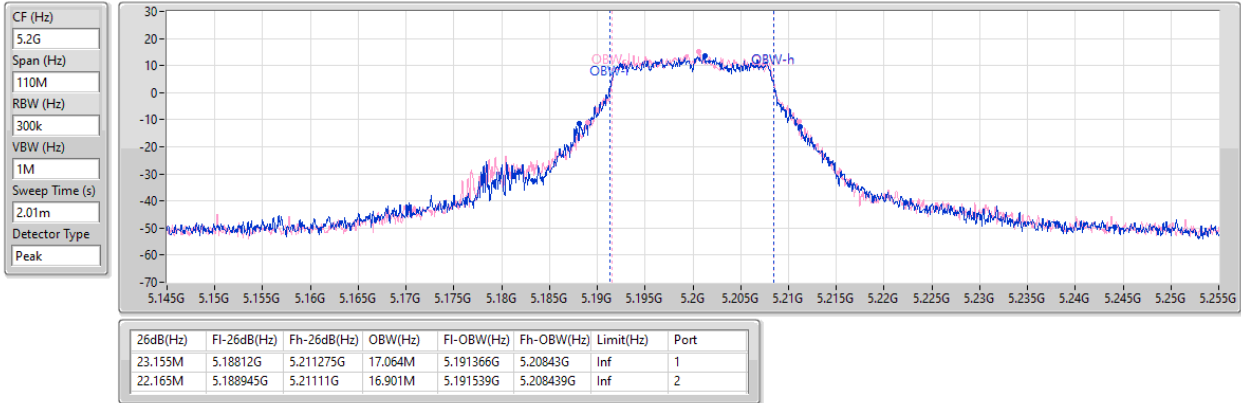


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5200MHz

15/01/2026

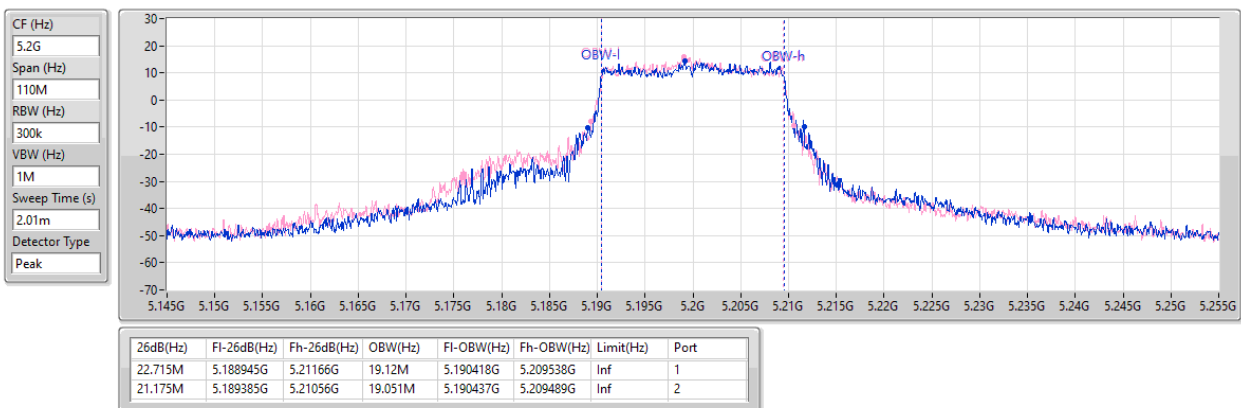


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5190MHz

15/01/2026

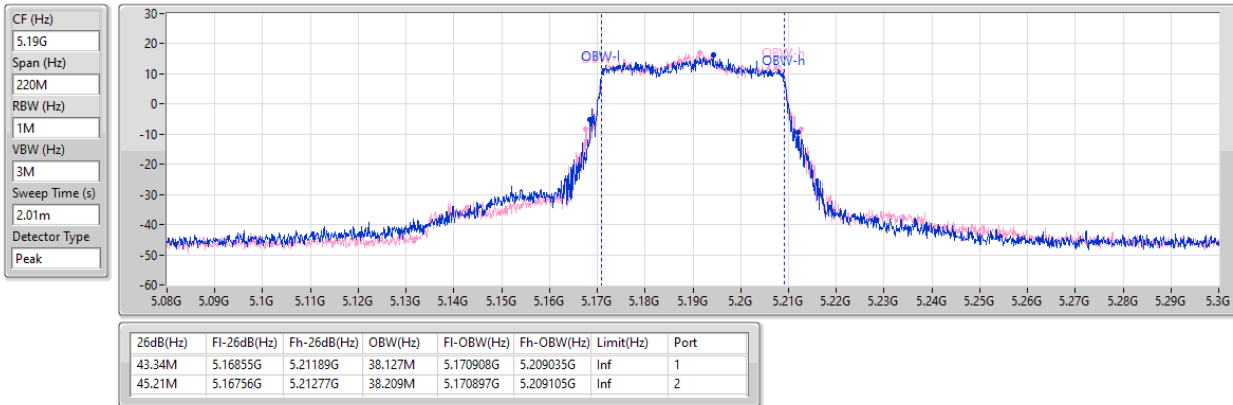


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5210MHz

15/01/2026

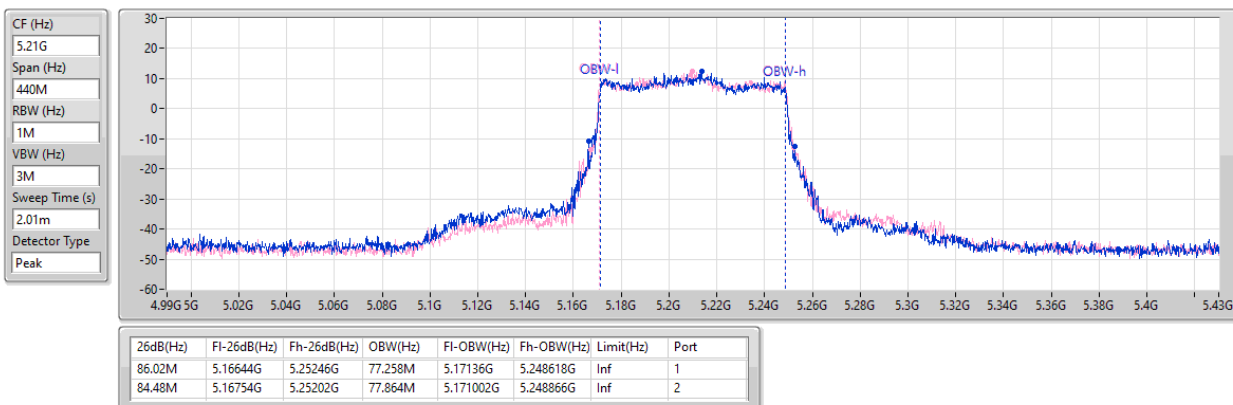


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.15-5.25GHz

15/01/2026

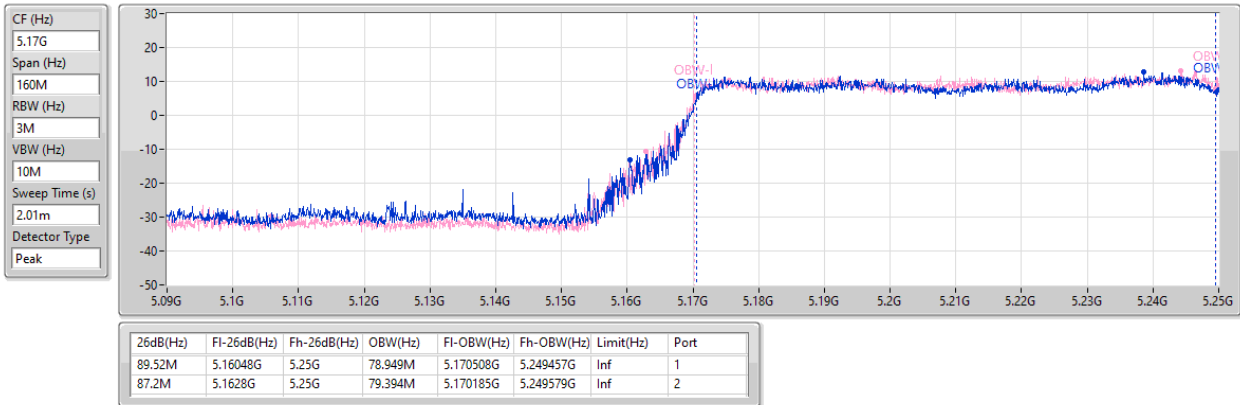


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5260MHz

15/01/2026

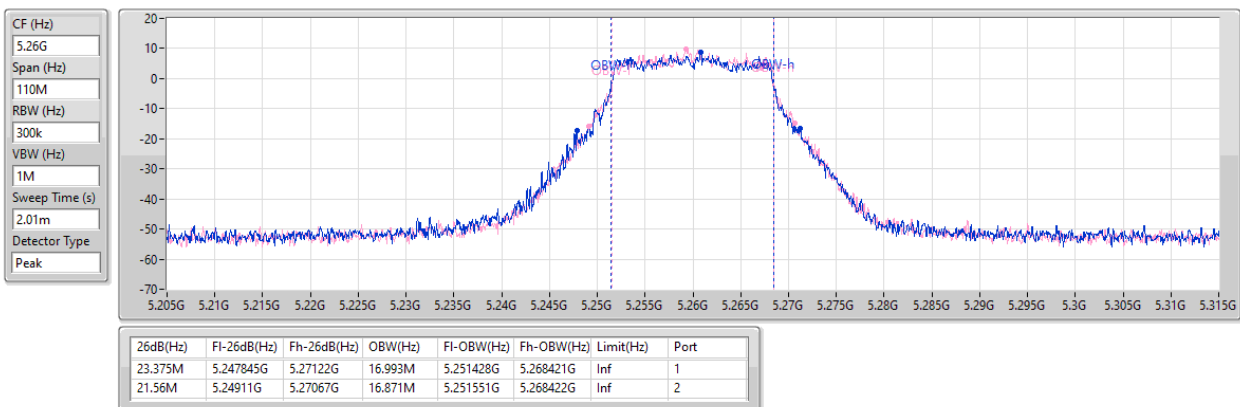


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5260MHz

15/01/2026

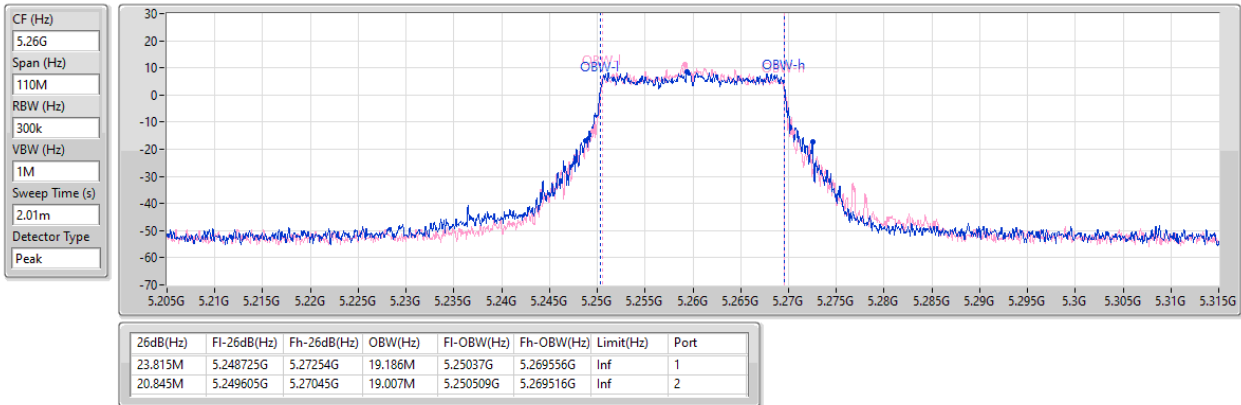


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5270MHz

15/01/2026

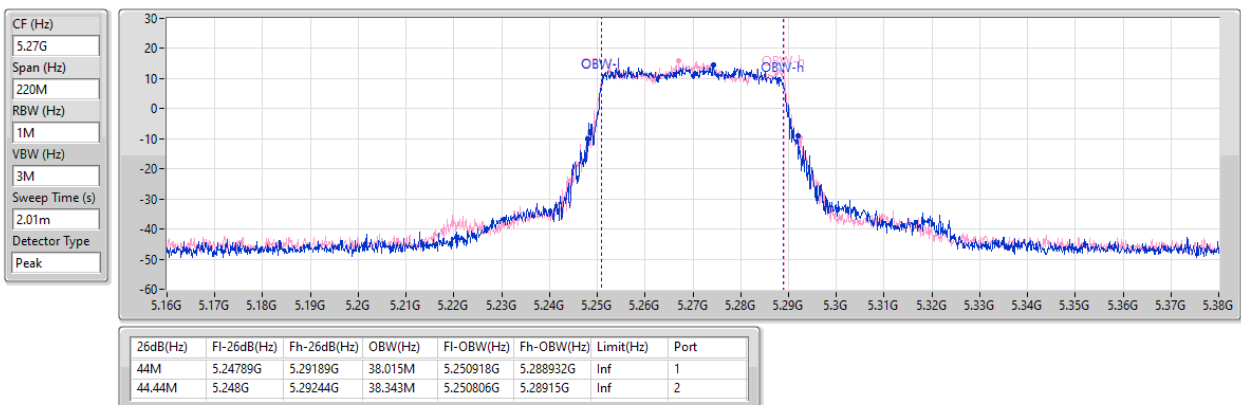


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5290MHz

15/01/2026

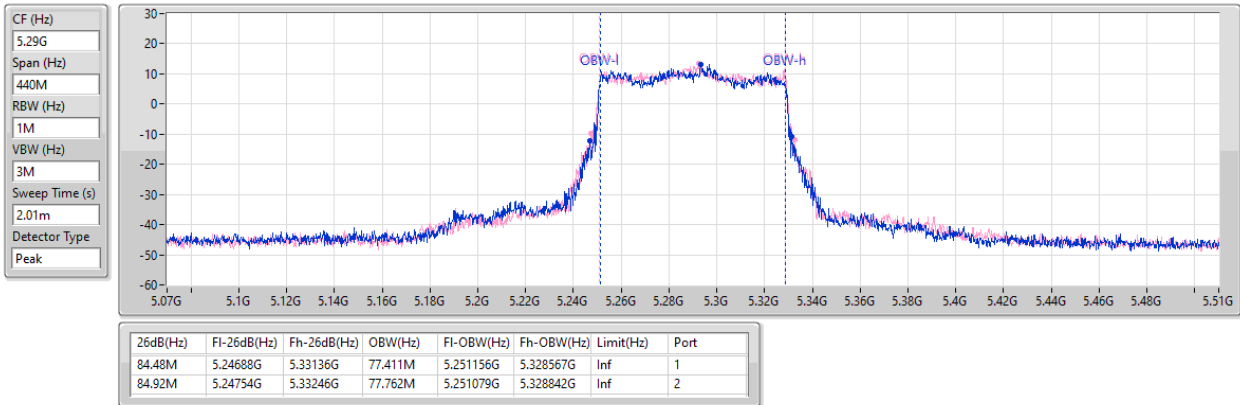


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.25-5.35GHz

15/01/2026

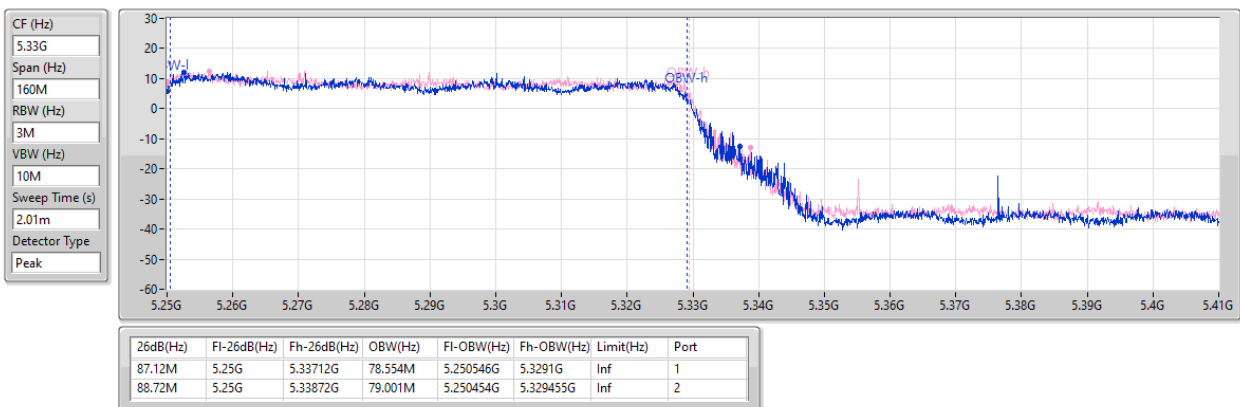


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5700MHz

15/01/2026

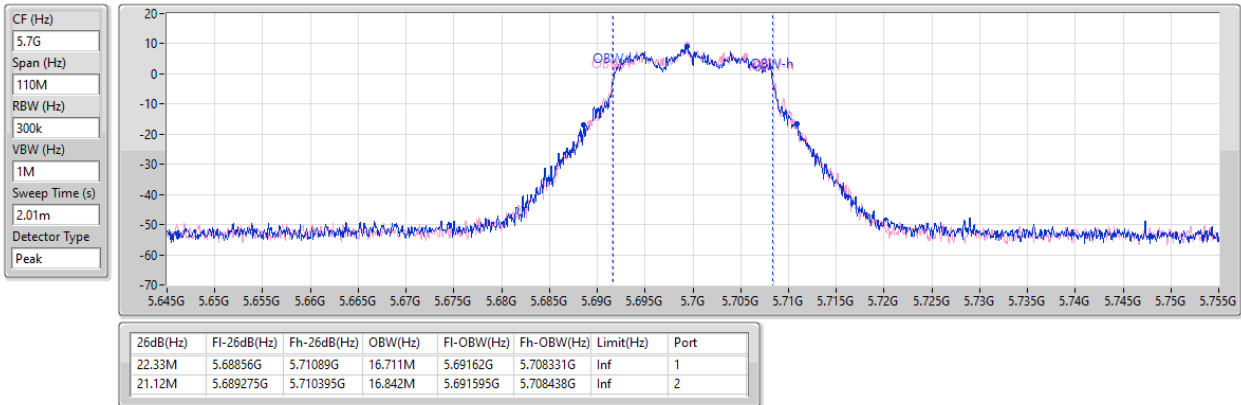


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5580MHz

15/01/2026

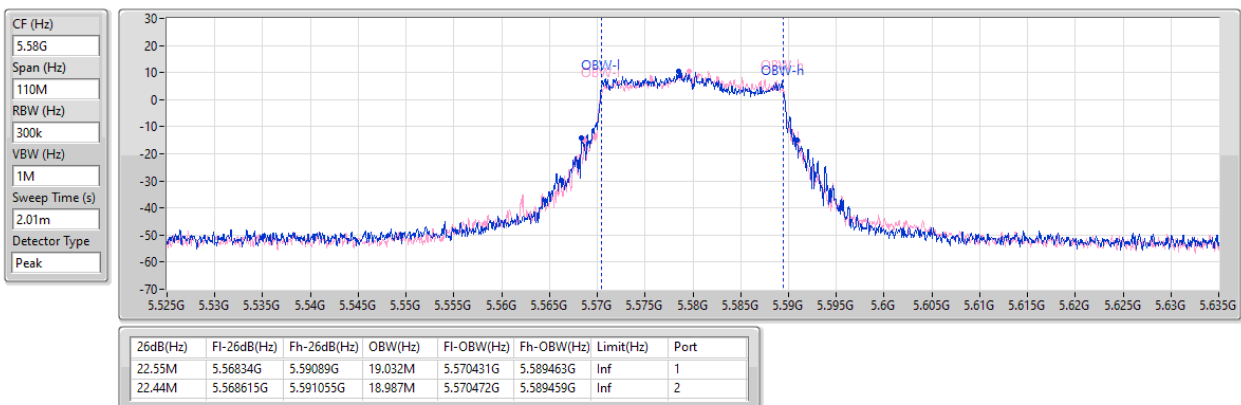


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5550MHz

15/01/2026

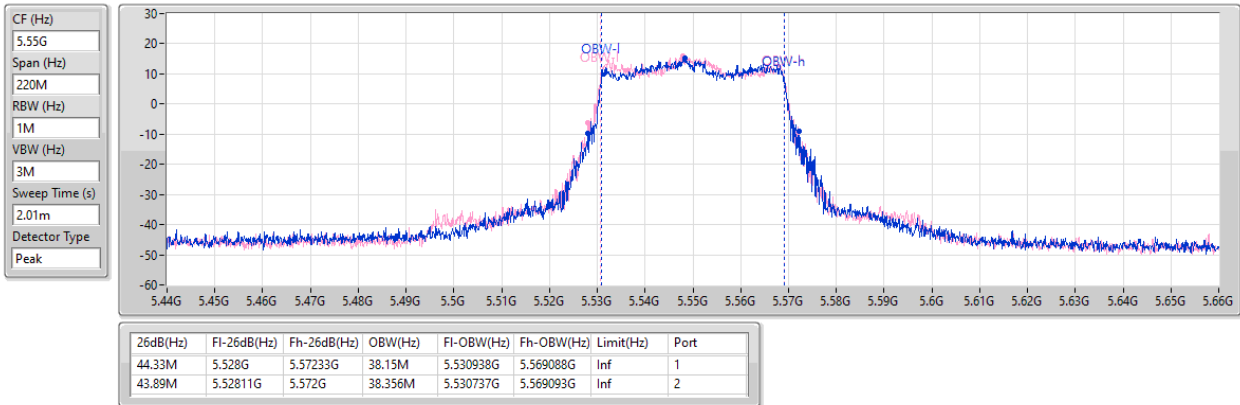


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5530MHz

15/01/2026

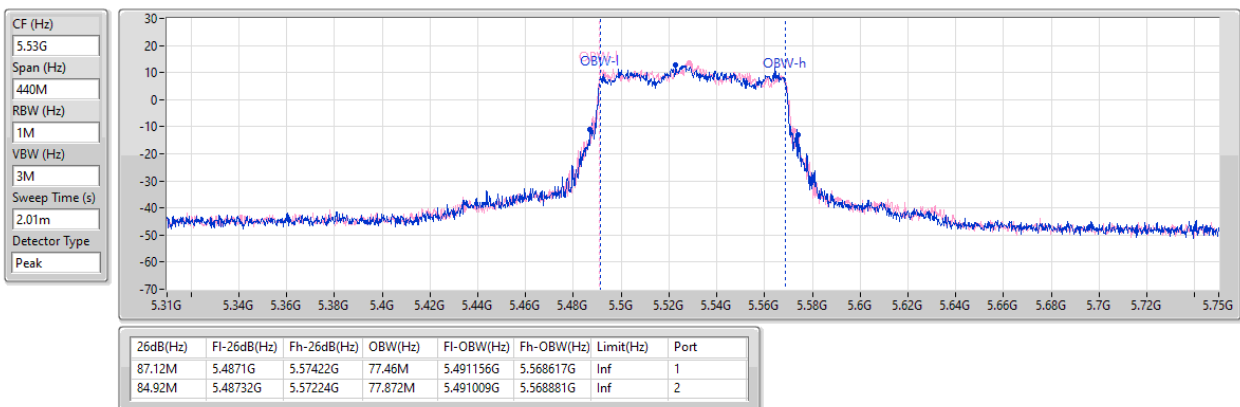


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5570MHz

15/01/2026

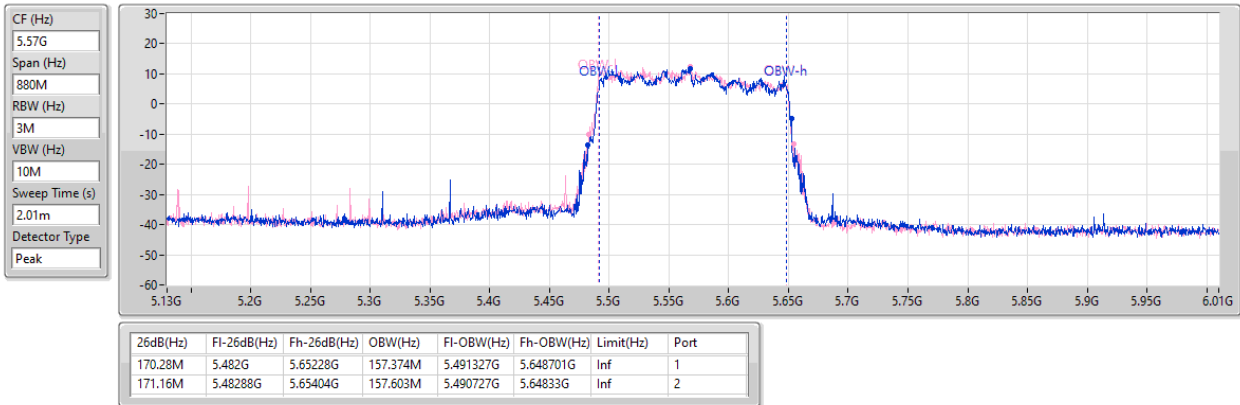


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5745MHz

15/01/2026

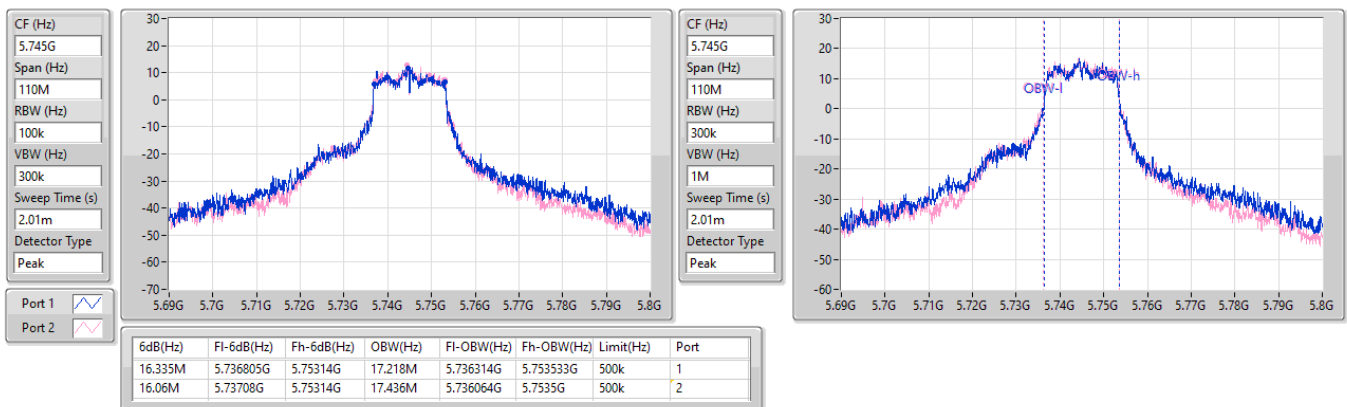


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5745MHz

15/01/2026

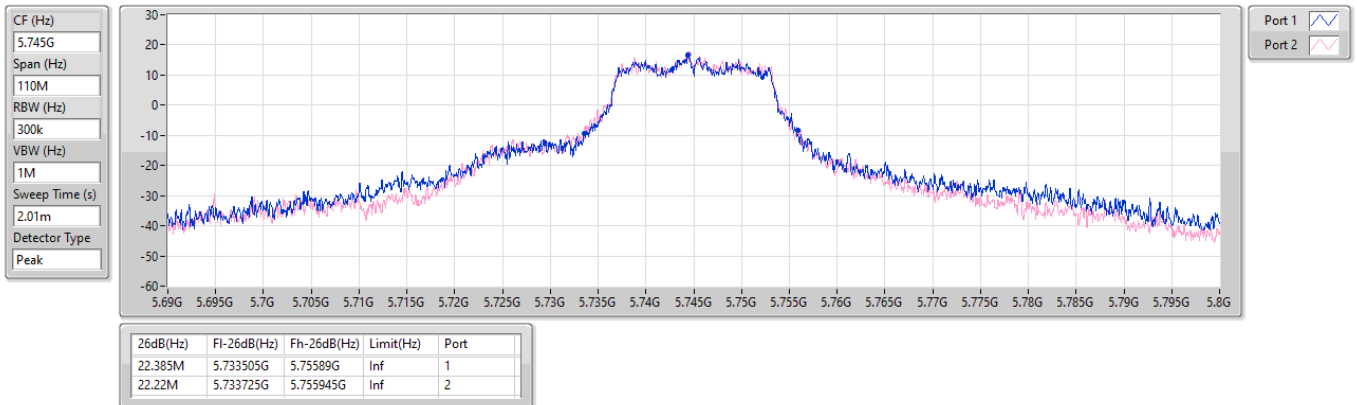


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5825MHz

15/01/2026

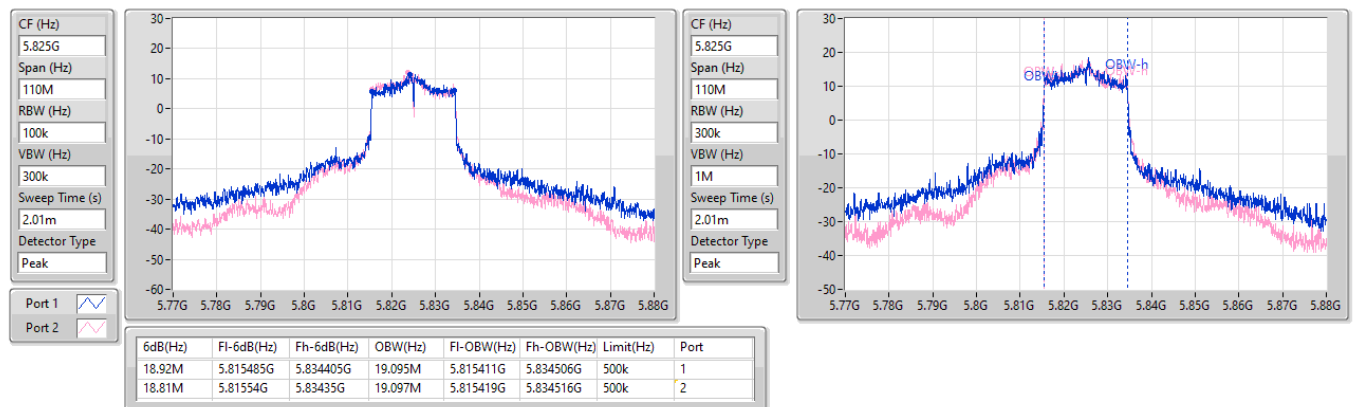


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5825MHz

15/01/2026

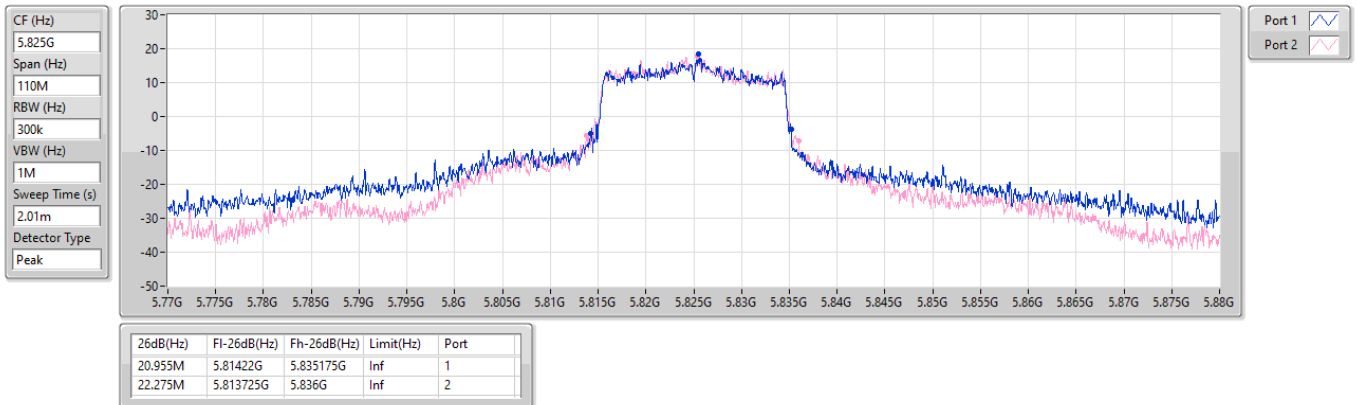


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5755MHz

15/01/2026

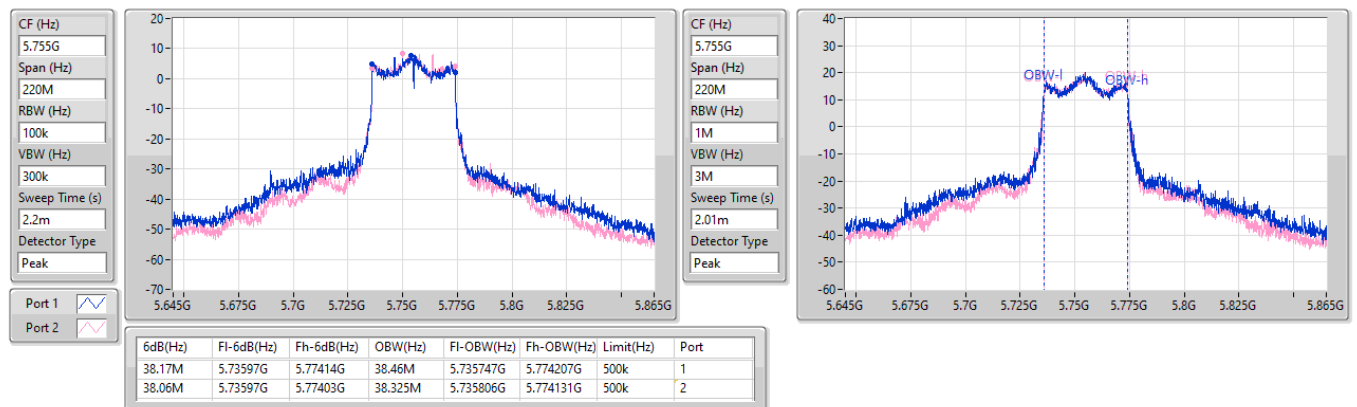


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5755MHz

15/01/2026

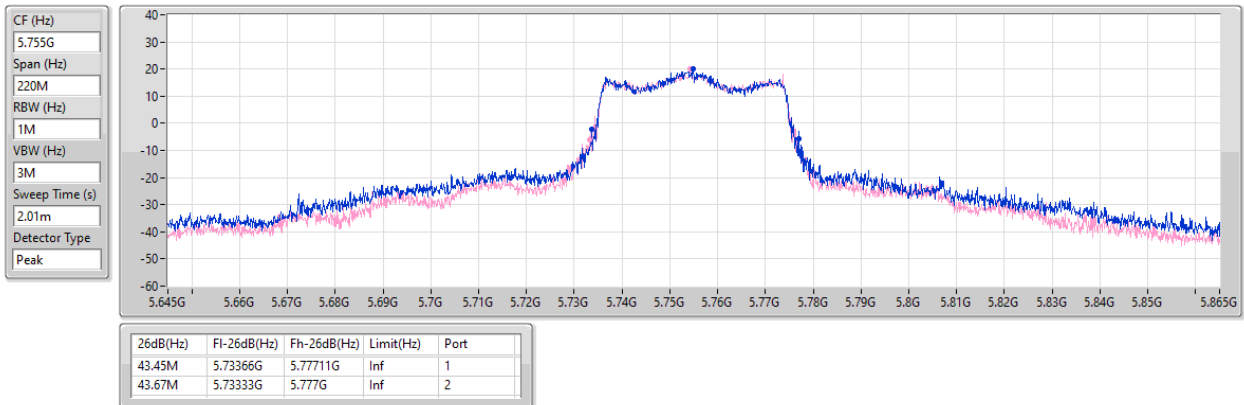


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5775MHz

15/01/2026

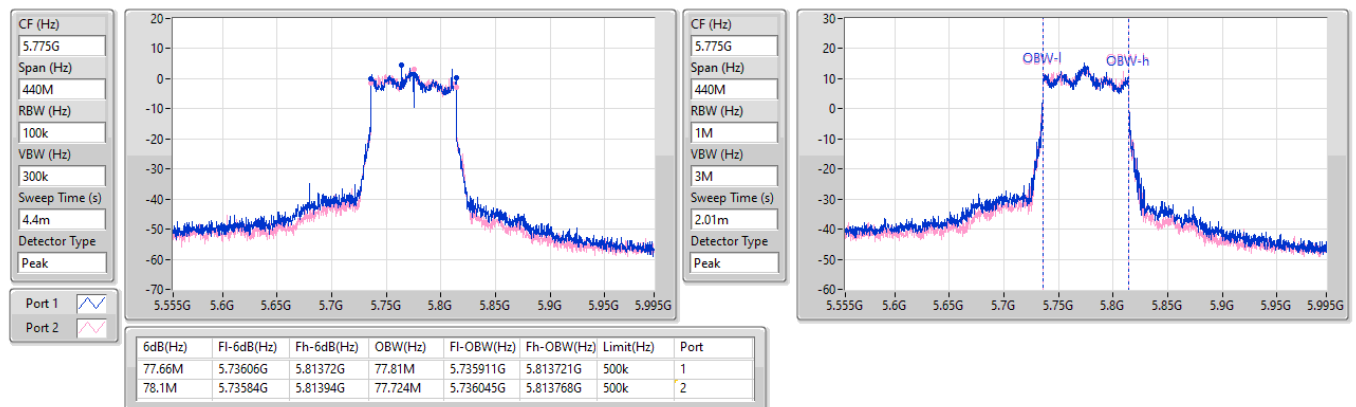


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5775MHz

15/01/2026

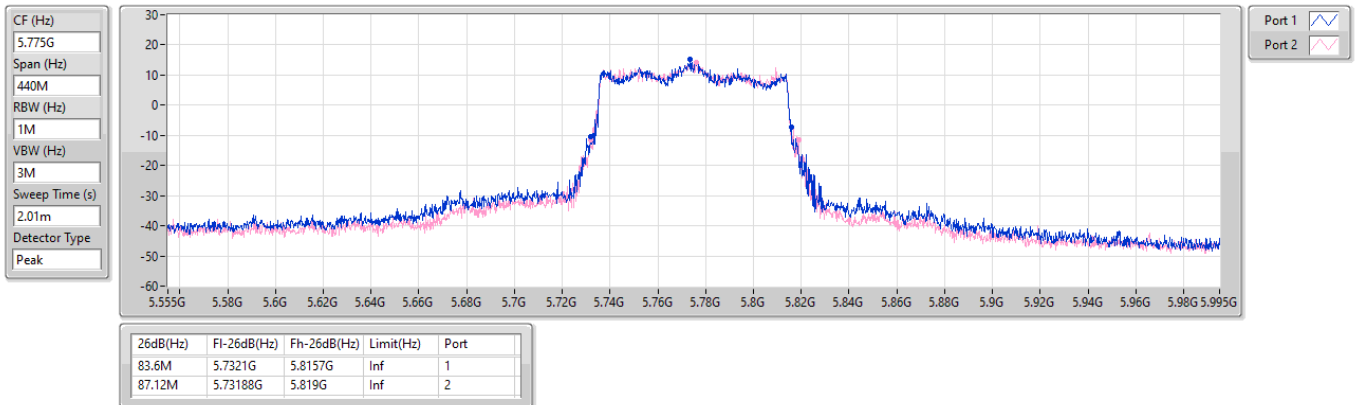


5.85-5.895GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5865MHz

15/01/2026

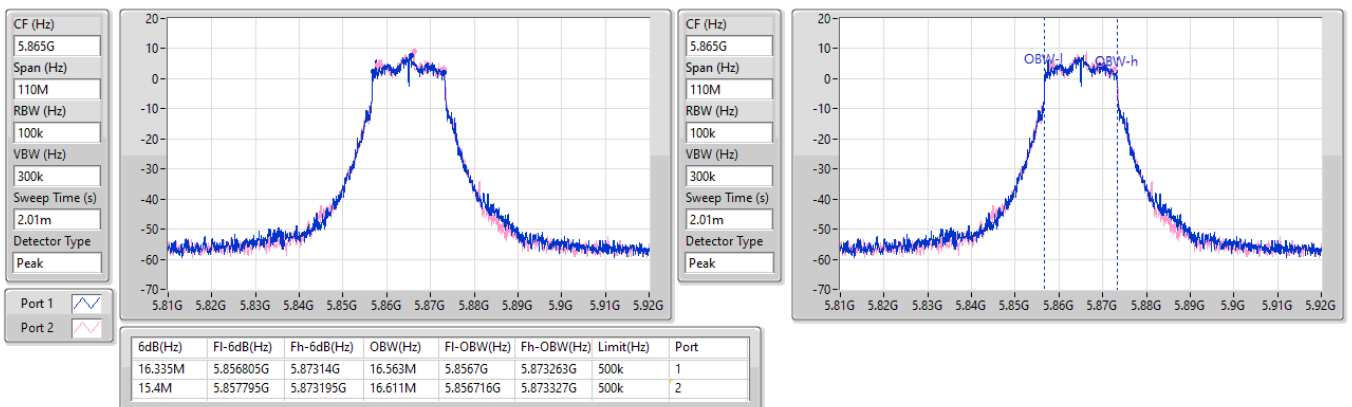


5.85-5.895GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5865MHz

15/01/2026

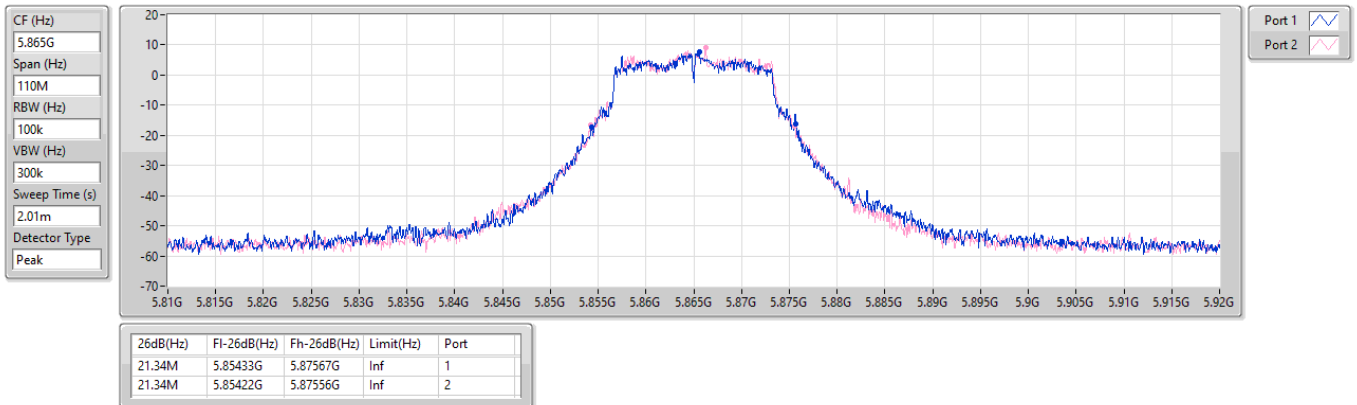


5.85-5.895GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5885MHz

15/01/2026

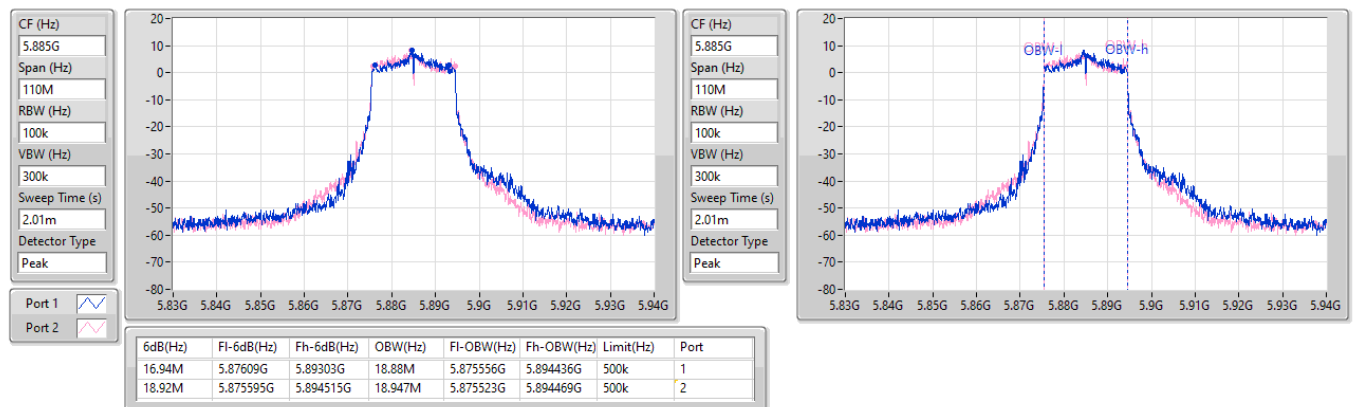


5.85-5.895GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5885MHz

15/01/2026

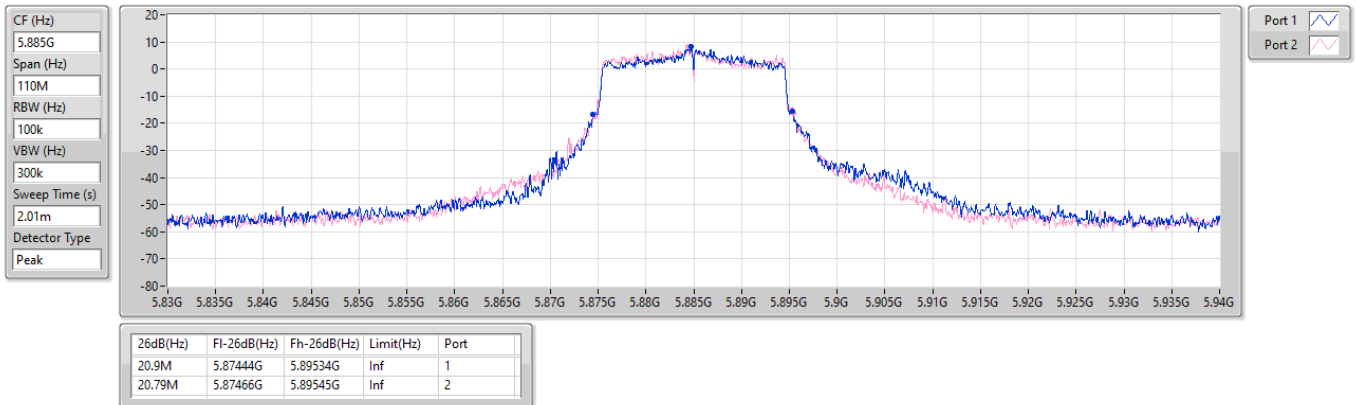


5.85-5.895GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5835MHz

15/01/2026

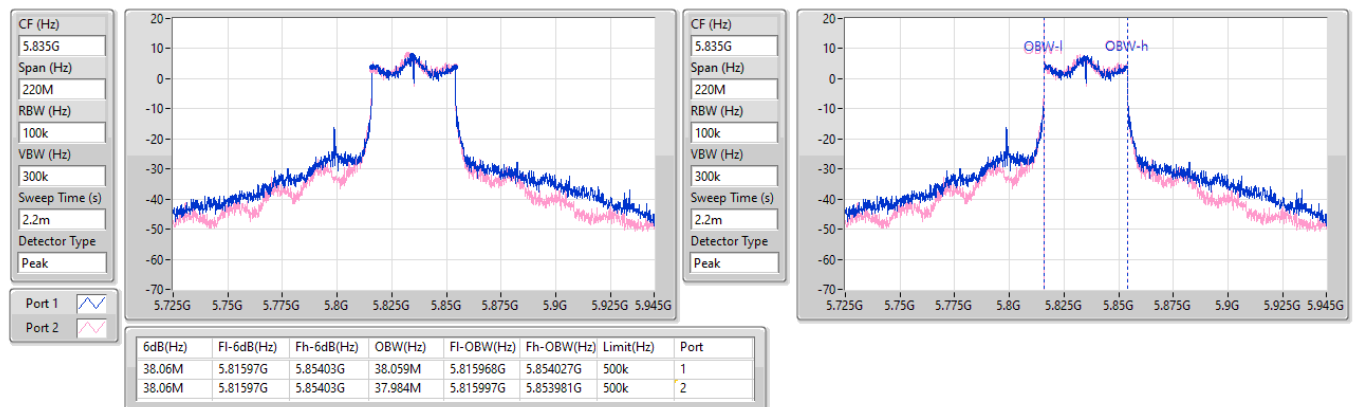


5.85-5.895GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5835MHz

15/01/2026

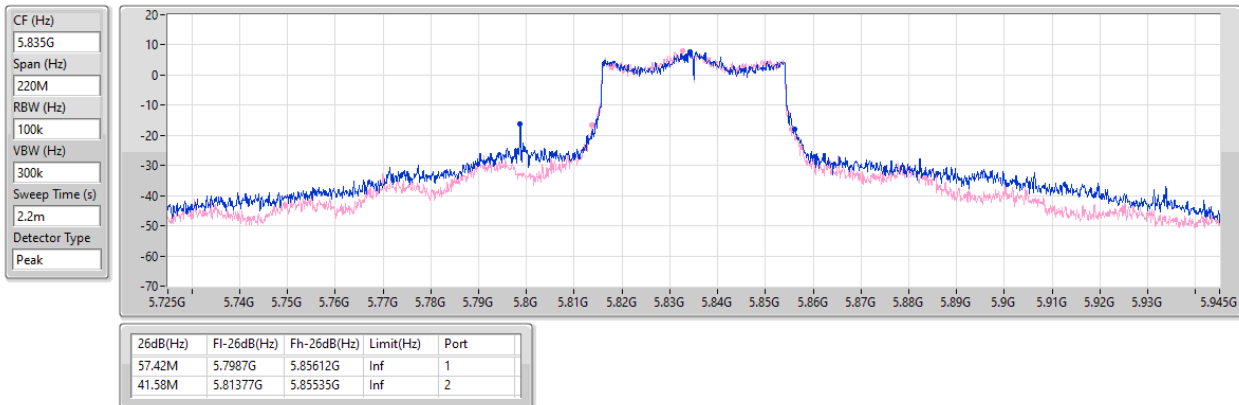


5.85-5.895GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5855MHz

15/01/2026

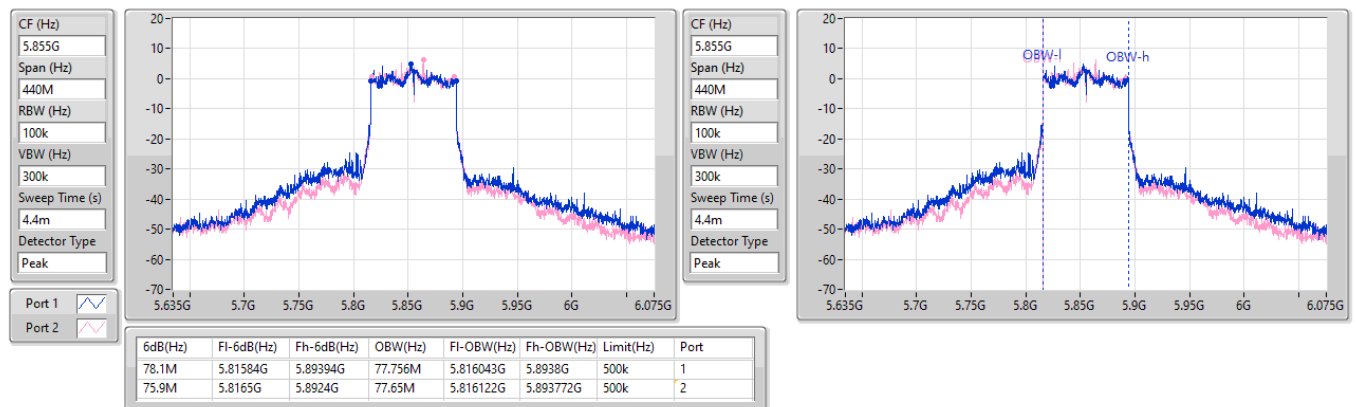


5.85-5.895GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5855MHz

15/01/2026

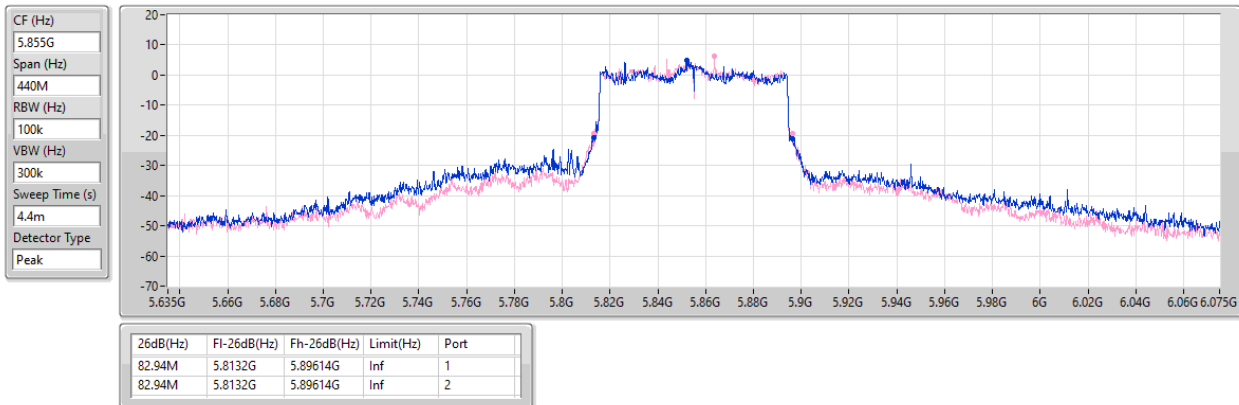


5.85-5.895GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5815MHz

15/01/2026

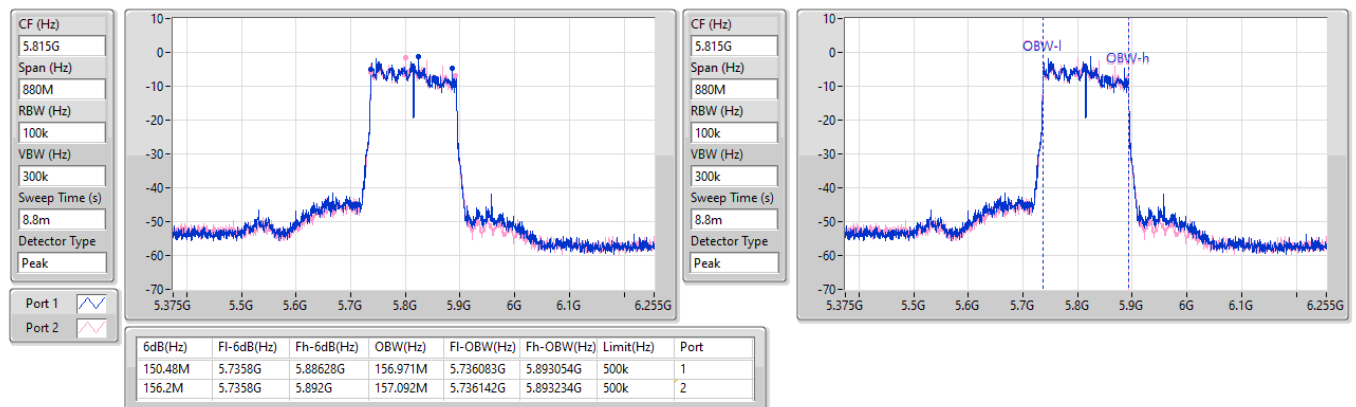


5.85-5.895GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5815MHz

15/01/2026

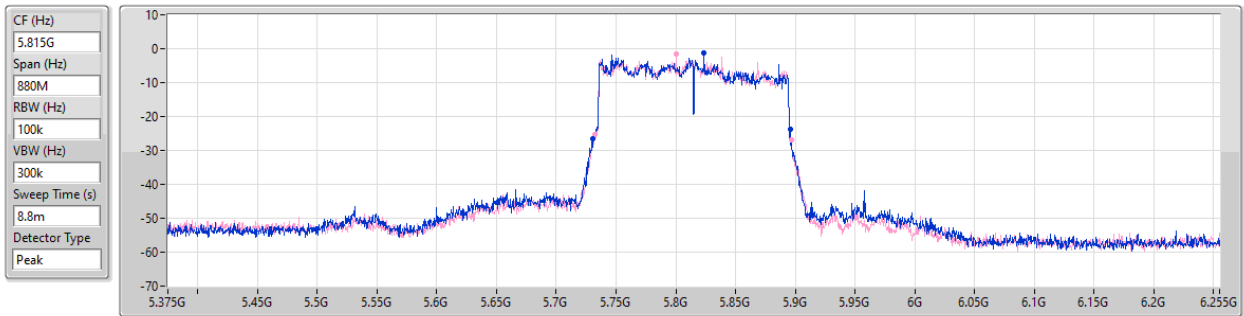

26dB(Hz)	F1-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
165M	5.73096G	5.89596G	Inf	1
164.12M	5.73228G	5.8964G	Inf	2



Average Power_Non-Beamforming

Appendix C.1

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	26.46	0.44259	32.45	1.75792
802.11be EHT20_Nss1,(MCS0)_2TX	27.08	0.51050	33.07	2.02768
802.11be EHT40_Nss1,(MCS0)_2TX	28.04	0.63680	34.03	2.52930
802.11be EHT80_Nss1,(MCS0)_2TX	23.20	0.20893	29.19	0.82985
802.11be EHT160_Nss1,(MCS0)_2TX	17.96	0.06252	23.95	0.24831
5.25-5.35GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	21.09	0.12853	26.55	0.45186
802.11be EHT20_Nss1,(MCS0)_2TX	21.67	0.14689	27.13	0.51642
802.11be EHT40_Nss1,(MCS0)_2TX	23.61	0.22961	29.07	0.80724
802.11be EHT80_Nss1,(MCS0)_2TX	23.73	0.23605	29.19	0.82985
802.11be EHT160_Nss1,(MCS0)_2TX	17.33	0.05408	22.79	0.19011
5.47-5.725GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.77	0.11940	25.31	0.33963
802.11be EHT20_Nss1,(MCS0)_2TX	21.39	0.13772	25.93	0.39174
802.11be EHT40_Nss1,(MCS0)_2TX	23.67	0.23281	28.21	0.66222
802.11be EHT80_Nss1,(MCS0)_2TX	23.92	0.24660	28.46	0.70146
802.11be EHT160_Nss1,(MCS0)_2TX	20.64	0.11588	25.18	0.32961
5.725-5.85GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	28.45	0.69984	33.31	2.14289
802.11be EHT20_Nss1,(MCS0)_2TX	28.77	0.75336	33.63	2.30675
802.11be EHT40_Nss1,(MCS0)_2TX	27.03	0.50466	31.89	1.54525
802.11be EHT80_Nss1,(MCS0)_2TX	24.80	0.30200	29.66	0.92470
5.85-5.895GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.87	0.24378	28.63	0.72946
802.11be EHT20_Nss1,(MCS0)_2TX	24.65	0.29174	29.41	0.87297
802.11be EHT40_Nss1,(MCS0)_2TX	27.10	0.51286	31.86	1.53462
802.11be EHT80_Nss1,(MCS0)_2TX	26.28	0.42462	31.04	1.27057
802.11be EHT160_Nss1,(MCS0)_2TX	21.99	0.15812	26.75	0.47315

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	5.99	22.72	23.25	26.00	30.00	31.99	Inf
5200MHz	Pass	5.99	22.78	23.24	26.03	30.00	32.02	Inf
5240MHz	Pass	5.99	23.30	23.60	26.46	30.00	32.45	Inf
5260MHz	Pass	5.46	17.58	18.03	20.82	23.98	26.28	Inf
5300MHz	Pass	5.46	17.56	17.97	20.78	23.98	26.24	Inf
5320MHz	Pass	5.46	17.88	18.27	21.09	23.98	26.55	Inf
5500MHz	Pass	4.54	17.46	18.04	20.77	23.98	25.31	Inf
5580MHz	Pass	4.54	17.31	17.58	20.46	23.98	25.00	Inf
5700MHz	Pass	4.54	16.86	17.09	19.99	23.98	24.53	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	4.54	15.63	16.03	18.84	23.08	23.38	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	4.86	7.82	8.45	11.16	30.00	16.02	Inf
5745MHz	Pass	4.86	25.10	25.39	28.26	30.00	33.12	Inf
5785MHz	Pass	4.86	25.17	25.70	28.45	30.00	33.31	Inf
5825MHz	Pass	4.86	25.18	25.57	28.39	30.00	33.25	Inf
5845MHz	Pass	4.76	20.45	20.71	23.59	Inf	28.35	36.00
5865MHz	Pass	4.76	20.75	20.97	23.87	Inf	28.63	36.00
5885MHz	Pass	4.76	20.73	20.91	23.83	Inf	28.59	36.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	5.99	23.34	23.96	26.67	30.00	32.66	Inf
5200MHz	Pass	5.99	23.32	23.98	26.67	30.00	32.66	Inf
5240MHz	Pass	5.99	23.73	24.39	27.08	30.00	33.07	Inf
5260MHz	Pass	5.46	18.02	18.91	21.50	23.98	26.96	Inf
5300MHz	Pass	5.46	17.97	18.73	21.38	23.98	26.84	Inf
5320MHz	Pass	5.46	18.22	19.06	21.67	23.98	27.13	Inf
5500MHz	Pass	4.54	18.07	18.66	21.39	23.98	25.93	Inf
5580MHz	Pass	4.54	17.97	18.43	21.22	23.98	25.76	Inf
5700MHz	Pass	4.54	18.03	18.09	21.07	23.98	25.61	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	4.54	16.60	16.87	19.75	23.03	24.29	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	4.86	8.41	9.37	11.93	30.00	16.79	Inf
5745MHz	Pass	4.86	24.58	24.74	27.67	30.00	32.53	Inf
5785MHz	Pass	4.86	25.48	26.03	28.77	30.00	33.63	Inf
5825MHz	Pass	4.86	25.13	25.23	28.19	30.00	33.05	Inf
5845MHz	Pass	4.76	21.36	21.44	24.41	Inf	29.17	36.00
5865MHz	Pass	4.76	21.67	21.60	24.65	Inf	29.41	36.00
5885MHz	Pass	4.76	21.13	21.20	24.18	Inf	28.94	36.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	5.99	20.92	21.43	24.19	30.00	30.18	Inf
5230MHz	Pass	5.99	24.77	25.27	28.04	30.00	34.03	Inf
5270MHz	Pass	5.46	20.31	20.85	23.60	23.98	29.06	Inf
5310MHz	Pass	5.46	20.42	20.77	23.61	23.98	29.07	Inf
5510MHz	Pass	4.54	20.32	20.84	23.60	23.98	28.14	Inf
5550MHz	Pass	4.54	20.47	20.85	23.67	23.98	28.21	Inf
5670MHz	Pass	4.54	20.28	20.65	23.48	23.98	28.02	Inf
5710MHz Straddle 5.47-5.725GHz	Pass	4.54	19.26	19.55	22.42	23.98	26.96	Inf
5710MHz Straddle 5.725-5.85GHz	Pass	4.86	10.11	10.05	13.09	30.00	17.95	Inf
5755MHz	Pass	4.86	23.94	24.10	27.03	30.00	31.89	Inf
5795MHz	Pass	4.86	23.66	24.17	26.93	30.00	31.79	Inf
5835MHz	Pass	4.76	23.95	24.22	27.10	Inf	31.86	36.00
5875MHz	Pass	4.76	23.79	23.94	26.88	Inf	31.64	36.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	5.99	20.15	20.23	23.20	30.00	29.19	Inf
5290MHz	Pass	5.46	20.47	20.95	23.73	23.98	29.19	Inf
5530MHz	Pass	4.54	20.45	20.92	23.70	23.98	28.24	Inf
5610MHz	Pass	4.54	20.77	21.04	23.92	23.98	28.46	Inf



Average Power_Non-Beamforming

Appendix C.1


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
5690MHz Straddle 5.47-5.725GHz	Pass	4.54	20.37	20.65	23.52	23.98	28.06	Inf
5690MHz Straddle 5.725-5.85GHz	Pass	4.86	7.34	7.32	10.34	30.00	15.20	Inf
5775MHz	Pass	4.86	21.72	21.86	24.80	30.00	29.66	Inf
5855MHz	Pass	4.76	23.06	23.47	26.28	Inf	31.04	36.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.99	14.71	15.18	17.96	30.00	23.95	Inf
5250MHz Straddle 5.25-5.35GHz	Pass	5.46	14.04	14.58	17.33	23.98	22.79	Inf
5570MHz	Pass	4.54	17.46	17.79	20.64	23.98	25.18	Inf
5815MHz	Pass	4.76	18.92	19.04	21.99	Inf	26.75	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.15-5.25GHz_TX

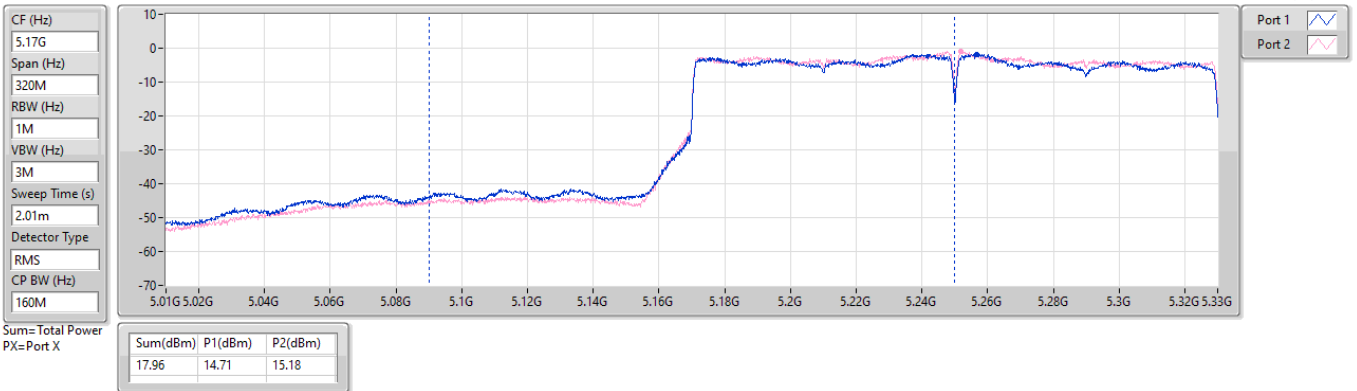

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

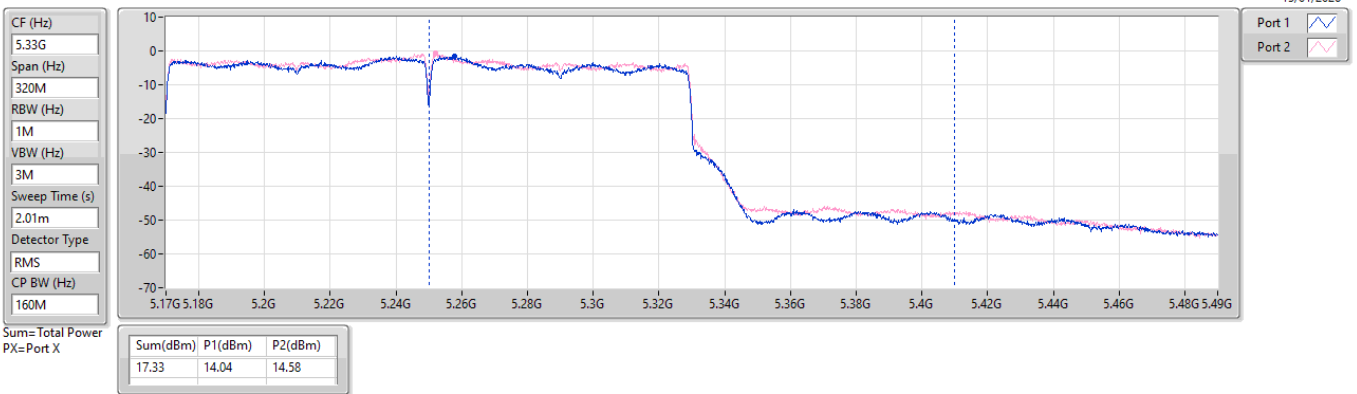

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	27.08	0.51050	35.33	3.41193
802.11be EHT40-BF_Nss1,(MCS0)_2TX	26.91	0.49091	35.16	3.28095
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.20	0.20893	31.45	1.39637
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.96	0.06252	26.21	0.41783
5.25-5.35GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.67	0.14689	29.58	0.90782
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.11	0.12912	29.02	0.79799
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.23	0.13274	29.14	0.82035
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.33	0.05408	25.24	0.33420
5.47-5.725GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.39	0.13772	28.87	0.77090
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.98	0.15776	29.46	0.88308
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.92	0.15560	29.40	0.87096
802.11be EHT160-BF_Nss1,(MCS0)_2TX	20.64	0.11588	28.12	0.64863
5.725-5.85GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	27.67	0.58479	35.29	3.38065
802.11be EHT40-BF_Nss1,(MCS0)_2TX	27.03	0.50466	34.65	2.91743
802.11be EHT80-BF_Nss1,(MCS0)_2TX	24.80	0.30200	32.42	1.74582
5.85-5.895GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	24.65	0.29174	31.97	1.57398
802.11be EHT40-BF_Nss1,(MCS0)_2TX	27.10	0.51286	34.42	2.76694
802.11be EHT80-BF_Nss1,(MCS0)_2TX	26.28	0.42462	33.60	2.29087
802.11be EHT160-BF_Nss1,(MCS0)_2TX	21.99	0.15812	29.31	0.85310

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	8.25	23.34	23.96	26.67	27.75	34.92	Inf
5200MHz	Pass	8.25	23.32	23.98	26.67	27.75	34.92	Inf
5240MHz	Pass	8.25	23.73	24.39	27.08	27.75	35.33	Inf
5260MHz	Pass	7.91	18.02	18.91	21.50	22.07	29.41	Inf
5300MHz	Pass	7.91	17.97	18.73	21.38	22.07	29.29	Inf
5320MHz	Pass	7.91	18.22	19.06	21.67	22.07	29.58	Inf
5500MHz	Pass	7.48	18.07	18.66	21.39	22.50	28.87	Inf
5580MHz	Pass	7.48	17.97	18.43	21.22	22.50	28.70	Inf
5700MHz	Pass	7.48	18.03	18.09	21.07	22.50	28.55	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	7.48	16.6	16.87	19.75	21.55	27.23	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	7.62	8.41	9.37	11.93	28.38	19.55	Inf
5745MHz	Pass	7.62	24.58	24.74	27.67	28.38	35.29	Inf
5785MHz	Pass	7.62	24.37	24.93	27.67	28.38	35.29	Inf
5825MHz	Pass	7.62	24.51	24.63	27.58	28.38	35.20	Inf
5845MHz	Pass	7.32	21.36	21.44	24.41	Inf	31.73	36.00
5865MHz	Pass	7.32	21.67	21.6	24.65	Inf	31.97	36.00
5885MHz	Pass	7.32	21.13	21.2	24.18	Inf	31.50	36.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	8.25	20.92	21.43	24.19	27.75	32.44	Inf
5230MHz	Pass	8.25	23.65	24.14	26.91	27.75	35.16	Inf
5270MHz	Pass	7.91	17.81	18.35	21.10	22.07	29.01	Inf
5310MHz	Pass	7.91	17.92	18.27	21.11	22.07	29.02	Inf
5510MHz	Pass	7.48	18.32	18.84	21.60	22.50	29.08	Inf
5550MHz	Pass	7.48	18.47	18.85	21.67	22.50	29.15	Inf
5670MHz	Pass	7.48	18.78	19.15	21.98	22.50	29.46	Inf
5710MHz Straddle 5.47-5.725GHz	Pass	7.48	18.73	18.96	21.86	22.50	29.34	Inf
5710MHz Straddle 5.725-5.85GHz	Pass	7.62	9.54	9.37	12.47	28.38	20.09	Inf
5755MHz	Pass	7.62	23.94	24.1	27.03	28.38	34.65	Inf
5795MHz	Pass	7.62	23.66	24.17	26.93	28.38	34.55	Inf
5835MHz	Pass	7.32	23.95	24.22	27.10	Inf	34.42	36.00
5875MHz	Pass	7.32	23.79	23.94	26.88	Inf	34.20	36.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	8.25	20.15	20.23	23.20	27.75	31.45	Inf
5290MHz	Pass	7.91	17.97	18.45	21.23	22.07	29.14	Inf
5530MHz	Pass	7.48	18.45	18.92	21.70	22.50	29.18	Inf
5610MHz	Pass	7.48	18.77	19.04	21.92	22.50	29.40	Inf
5690MHz Straddle 5.47-5.725GHz	Pass	7.48	18.3	18.47	21.40	22.50	28.88	Inf
5690MHz Straddle 5.725-5.85GHz	Pass	7.62	5.31	5.16	8.25	28.38	15.87	Inf
5775MHz	Pass	7.62	21.72	21.86	24.80	28.38	32.42	Inf
5855MHz	Pass	7.32	23.06	23.47	26.28	Inf	33.60	36.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.25	14.71	15.18	17.96	27.75	26.21	Inf
5250MHz Straddle 5.25-5.35GHz	Pass	7.91	14.04	14.58	17.33	22.07	25.24	Inf
5570MHz	Pass	7.48	17.46	17.79	20.64	22.50	28.12	Inf
5815MHz	Pass	7.32	18.92	19.04	21.99	Inf	29.31	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	14.66	22.91
802.11be EHT20_Nss1,(MCS0)_2TX	14.58	22.83
802.11be EHT40_Nss1,(MCS0)_2TX	12.71	20.96
802.11be EHT80_Nss1,(MCS0)_2TX	5.02	13.27
802.11be EHT160_Nss1,(MCS0)_2TX	-0.57	7.68
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	8.98	16.89
802.11be EHT20_Nss1,(MCS0)_2TX	8.95	16.86
802.11be EHT40_Nss1,(MCS0)_2TX	8.29	16.20
802.11be EHT80_Nss1,(MCS0)_2TX	5.58	13.49
802.11be EHT160_Nss1,(MCS0)_2TX	-0.35	7.56
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	9.48	16.96
802.11be EHT20_Nss1,(MCS0)_2TX	9.28	16.76
802.11be EHT40_Nss1,(MCS0)_2TX	9.10	16.58
802.11be EHT80_Nss1,(MCS0)_2TX	7.09	14.57
802.11be EHT160_Nss1,(MCS0)_2TX	-0.15	7.33
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.18	23.80
802.11be EHT20_Nss1,(MCS0)_2TX	15.16	22.78
802.11be EHT40_Nss1,(MCS0)_2TX	11.10	18.72
802.11be EHT80_Nss1,(MCS0)_2TX	6.09	13.71
5.85-5.895GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	12.52	19.84
802.11be EHT20_Nss1,(MCS0)_2TX	12.63	19.95
802.11be EHT40_Nss1,(MCS0)_2TX	12.53	19.85
802.11be EHT80_Nss1,(MCS0)_2TX	8.83	16.15
802.11be EHT160_Nss1,(MCS0)_2TX	1.10	8.42

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	8.25	11.25	11.72	14.44	14.75	22.69	Inf
5200MHz	Pass	8.25	11.05	11.66	14.33	14.75	22.58	Inf
5240MHz	Pass	8.25	11.33	12.06	14.66	14.75	22.91	Inf
5260MHz	Pass	7.91	5.50	6.53	8.96	9.09	16.87	Inf
5300MHz	Pass	7.91	5.05	6.43	8.70	9.09	16.61	Inf
5320MHz	Pass	7.91	5.33	6.72	8.98	9.09	16.89	Inf
5500MHz	Pass	7.48	6.26	6.39	9.28	9.52	16.76	Inf
5580MHz	Pass	7.48	6.61	6.39	9.48	9.52	16.96	Inf
5700MHz	Pass	7.48	6.25	5.99	9.11	9.52	16.59	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	7.48	6.03	6.14	9.08	9.52	16.56	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	7.62	1.70	1.85	4.79	28.38	12.41	Inf
5745MHz	Pass	7.62	12.71	12.57	15.63	28.38	23.25	Inf
5785MHz	Pass	7.62	13.03	13.33	16.18	28.38	23.80	Inf
5825MHz	Pass	7.62	12.54	12.88	15.70	28.38	23.32	Inf
5845MHz	Pass	7.32	9.16	9.59	12.35	Inf	19.67	20.00
5865MHz	Pass	7.32	9.37	9.73	12.52	Inf	19.84	20.00
5885MHz	Pass	7.32	9.32	9.77	12.51	Inf	19.83	20.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	8.25	10.74	11.93	14.38	14.75	22.63	Inf
5200MHz	Pass	8.25	10.56	11.86	14.24	14.75	22.49	Inf
5240MHz	Pass	8.25	10.67	12.33	14.58	14.75	22.83	Inf
5260MHz	Pass	7.91	4.72	6.81	8.87	9.09	16.78	Inf
5300MHz	Pass	7.91	4.46	6.54	8.60	9.09	16.51	Inf
5320MHz	Pass	7.91	4.70	6.97	8.95	9.09	16.86	Inf
5500MHz	Pass	7.48	5.38	6.70	9.06	9.52	16.54	Inf
5580MHz	Pass	7.48	6.01	6.61	9.28	9.52	16.76	Inf
5700MHz	Pass	7.48	6.27	6.18	9.23	9.52	16.71	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	7.48	6.02	6.19	9.12	9.52	16.60	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	7.62	-0.30	0.32	2.98	28.38	10.60	Inf
5745MHz	Pass	7.62	11.36	11.14	14.22	28.38	21.84	Inf
5785MHz	Pass	7.62	12.09	12.23	15.16	28.38	22.78	Inf
5825MHz	Pass	7.62	11.79	11.76	14.74	28.38	22.36	Inf
5845MHz	Pass	7.32	9.45	9.38	12.40	Inf	19.72	20.00
5865MHz	Pass	7.32	9.75	9.55	12.63	Inf	19.95	20.00
5885MHz	Pass	7.32	9.33	9.00	12.11	Inf	19.43	20.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	8.25	5.51	6.80	9.21	14.75	17.46	Inf
5230MHz	Pass	8.25	9.09	10.26	12.71	14.75	20.96	Inf
5270MHz	Pass	7.91	4.28	6.10	8.29	9.09	16.20	Inf
5310MHz	Pass	7.91	4.05	6.07	8.15	9.09	16.06	Inf
5510MHz	Pass	7.48	5.12	6.28	8.69	9.52	16.17	Inf
5550MHz	Pass	7.48	5.50	6.45	8.99	9.52	16.47	Inf
5670MHz	Pass	7.48	6.07	6.15	9.10	9.52	16.58	Inf
5710MHz Straddle 5.47-5.725GHz	Pass	7.48	6.10	6.01	9.07	9.52	16.55	Inf
5710MHz Straddle 5.725-5.85GHz	Pass	7.62	1.53	1.43	4.39	28.38	12.01	Inf
5755MHz	Pass	7.62	8.23	8.08	11.10	28.38	18.72	Inf
5795MHz	Pass	7.62	7.90	7.88	10.90	28.38	18.52	Inf
5835MHz	Pass	7.32	9.58	9.50	12.53	Inf	19.85	20.00
5875MHz	Pass	7.32	9.38	9.25	12.29	Inf	19.61	20.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	8.25	1.65	2.43	5.02	14.75	13.27	Inf
5290MHz	Pass	7.91	1.81	3.50	5.58	9.09	13.49	Inf
5530MHz	Pass	7.48	3.07	3.68	6.26	9.52	13.74	Inf
5610MHz	Pass	7.48	3.59	3.85	6.63	9.52	14.11	Inf



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5690MHz Straddle 5.47-5.725GHz	Pass	7.48	4.12	4.05	7.09	9.52	14.57	Inf
5690MHz Straddle 5.725-5.85GHz	Pass	7.62	-1.28	-1.32	1.67	28.38	9.29	Inf
5775MHz	Pass	7.62	3.22	2.97	6.09	28.38	13.71	Inf
5855MHz	Pass	7.32	5.81	5.89	8.83	Inf	16.15	20.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.25	-3.59	-2.72	-0.57	14.75	7.68	Inf
5250MHz Straddle 5.25-5.35GHz	Pass	7.91	-3.61	-2.70	-0.35	9.09	7.56	Inf
5570MHz	Pass	7.48	-3.06	-3.12	-0.15	9.52	7.33	Inf
5815MHz	Pass	7.32	-1.84	-1.95	1.10	Inf	8.42	20.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

15/01/2026

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

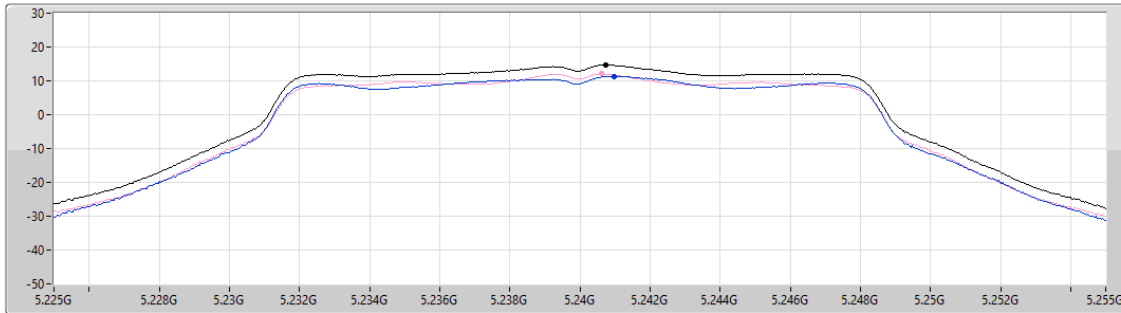

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.66	14.66	11.33	12.06

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5240MHz

15/01/2026

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

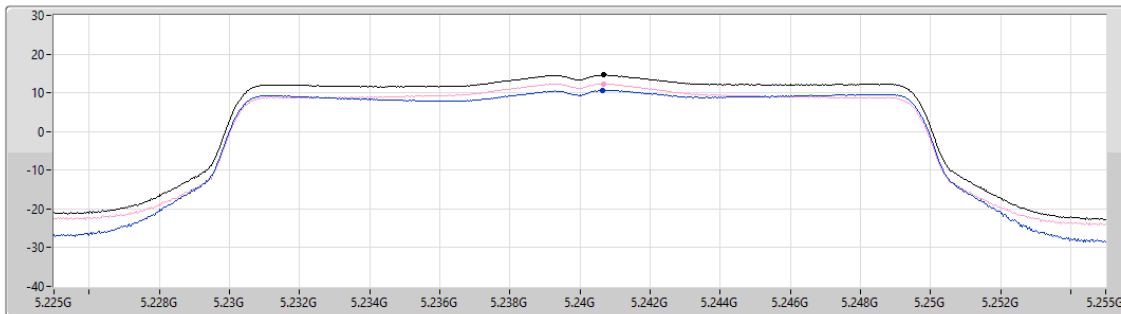

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.58	14.58	10.67	12.33

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5230MHz

15/01/2026

CF (Hz)
5.23G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

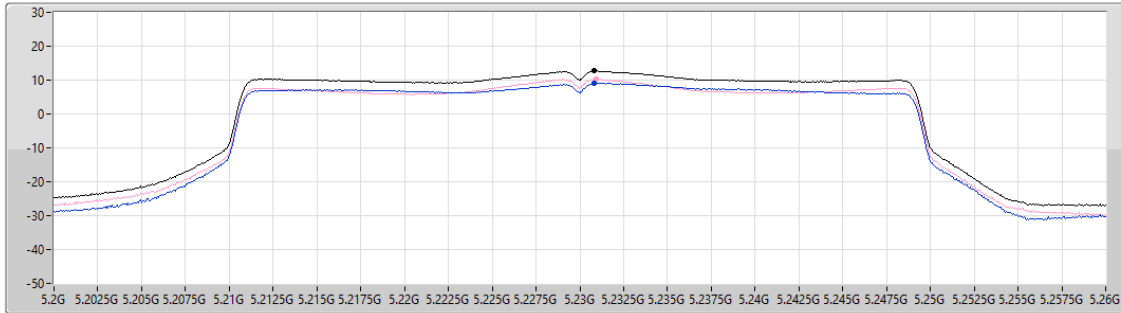

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
12.71	12.71	9.09	10.26

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5210MHz

15/01/2026

CF (Hz)
5.21G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

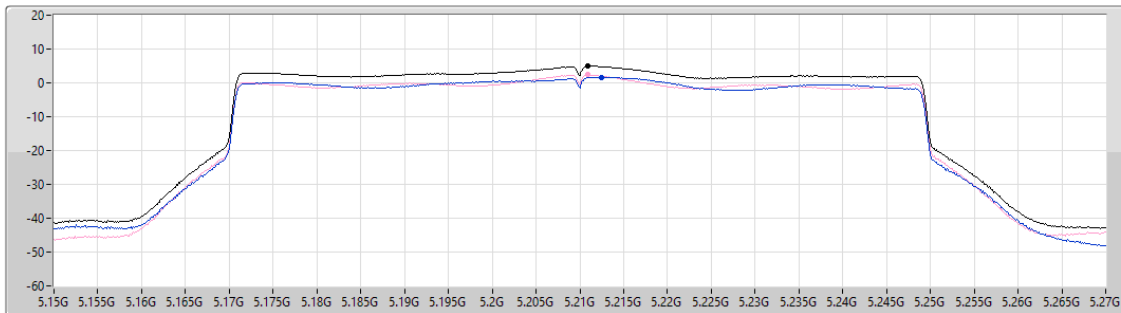

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.02	5.02	1.65	2.43

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

15/01/2026

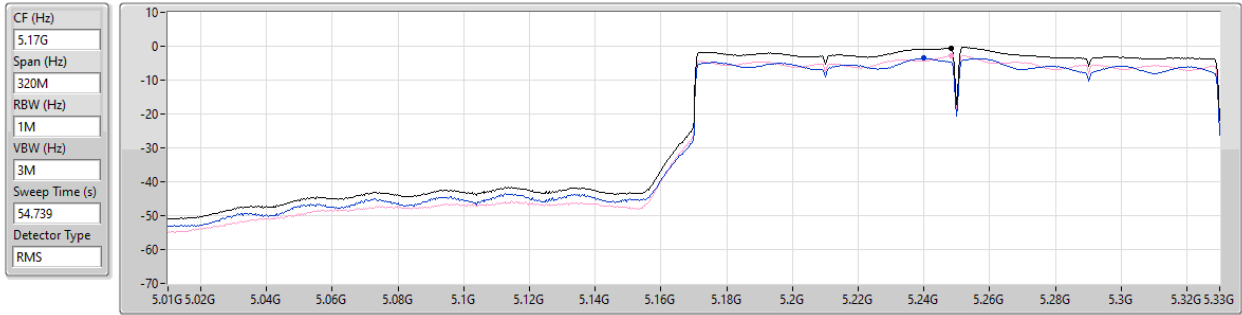


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.57	-0.57	-3.59	-2.72

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5320MHz

15/01/2026

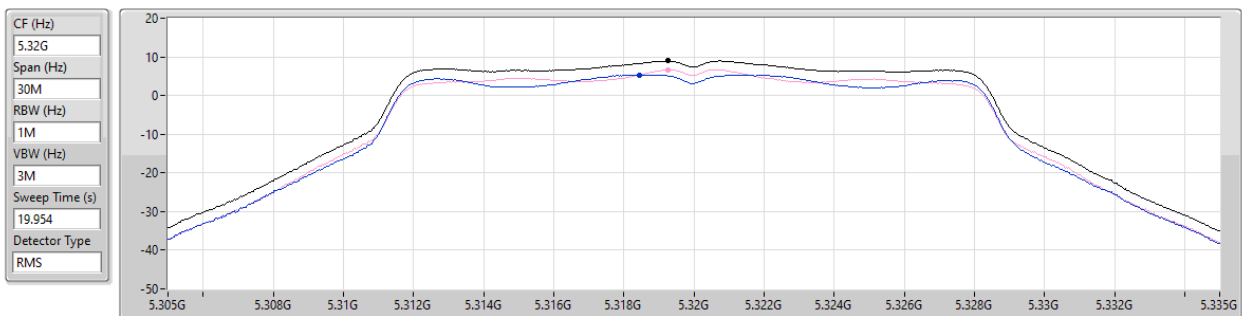

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.98	8.98	5.33	6.72

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5320MHz

15/01/2026

CF (Hz)
5.32G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

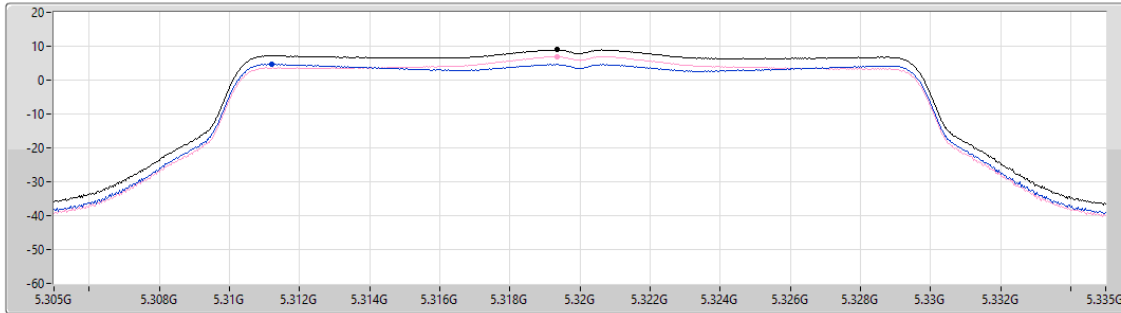

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
8.95	8.95	4.70	6.97

Sum ☒

Port 1 ☒

Port 2 ☒

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5270MHz

15/01/2026

CF (Hz)
5.27G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

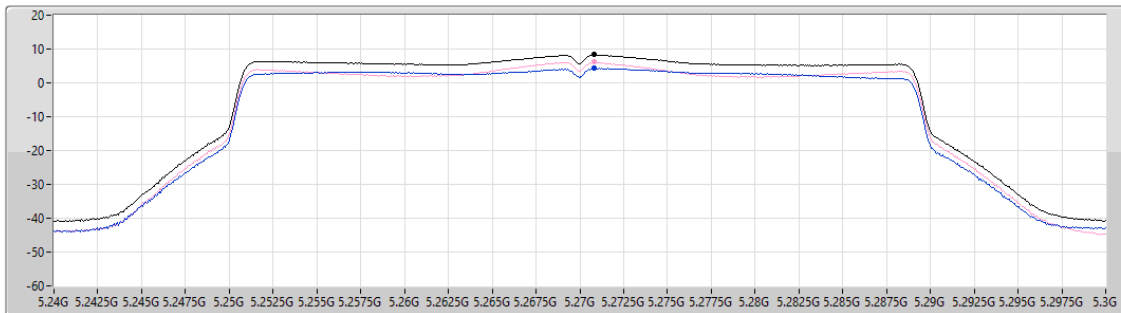

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
8.29	8.29	4.28	6.10

Sum ☒

Port 1 ☒

Port 2 ☒

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

15/01/2026

CF (Hz)
5.29G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

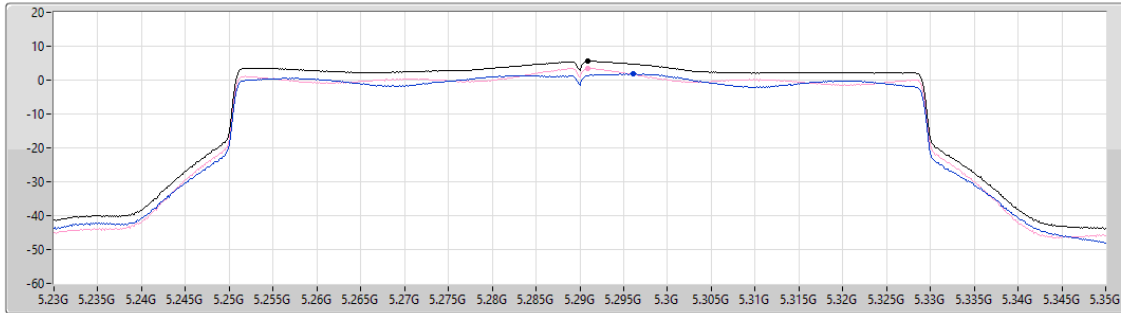

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.58	5.58	1.81	3.50

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

15/01/2026

CF (Hz)
5.33G


Span (Hz)
320M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

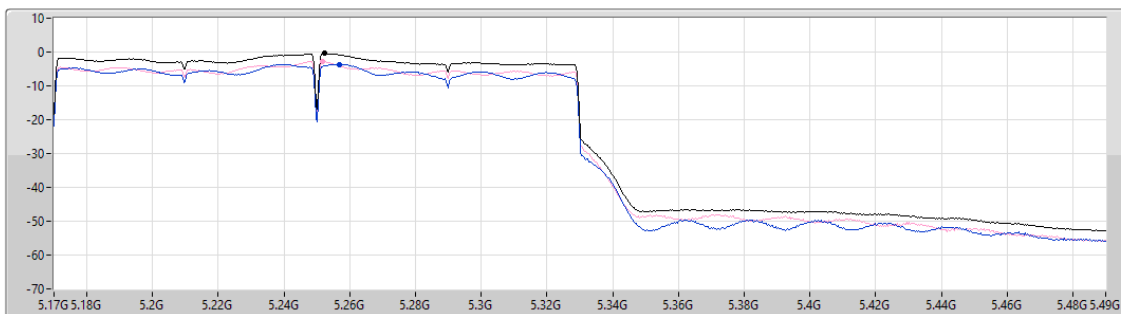

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.35	-0.35	-3.61	-2.70

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5580MHz

15/01/2026

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

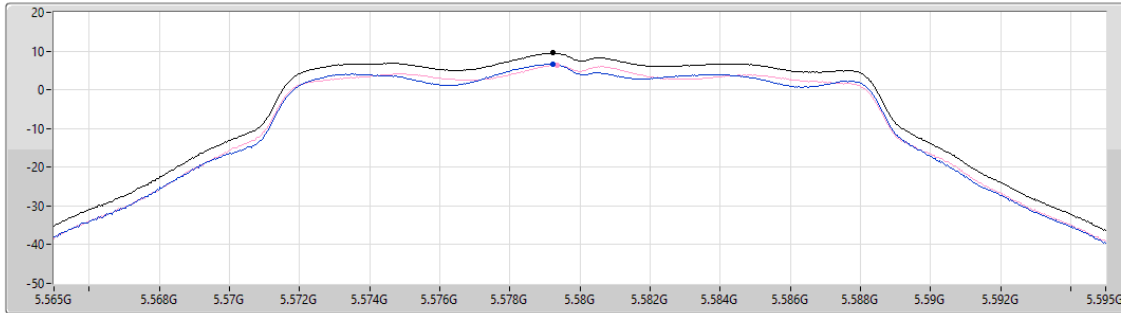

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.48	9.48	6.61	6.39

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5580MHz

15/01/2026

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

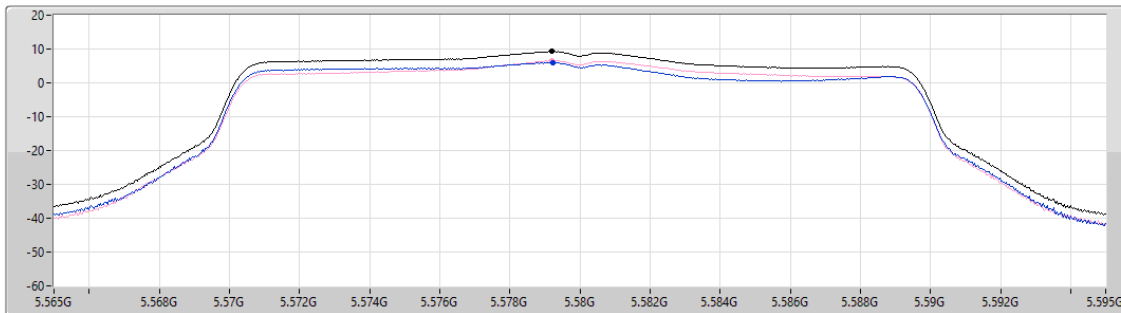

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.28	9.28	6.01	6.61

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5670MHz

15/01/2026

CF (Hz)
5.67G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

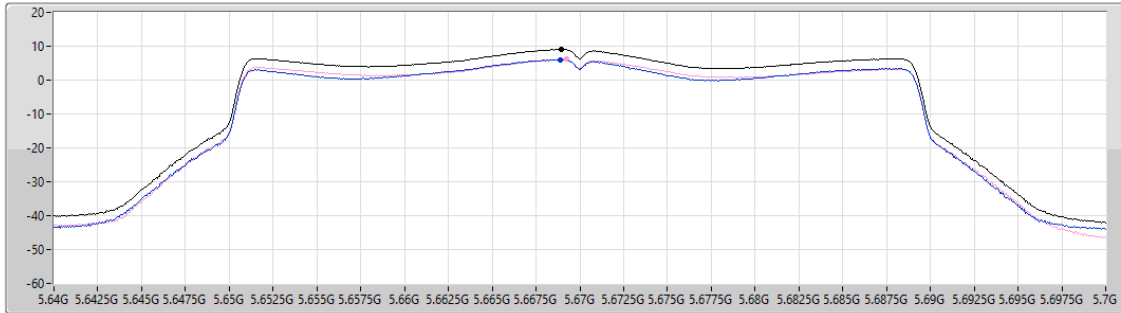

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.10	9.10	6.07	6.15

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

15/01/2026

CF (Hz)
5.65G


Span (Hz)
300M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

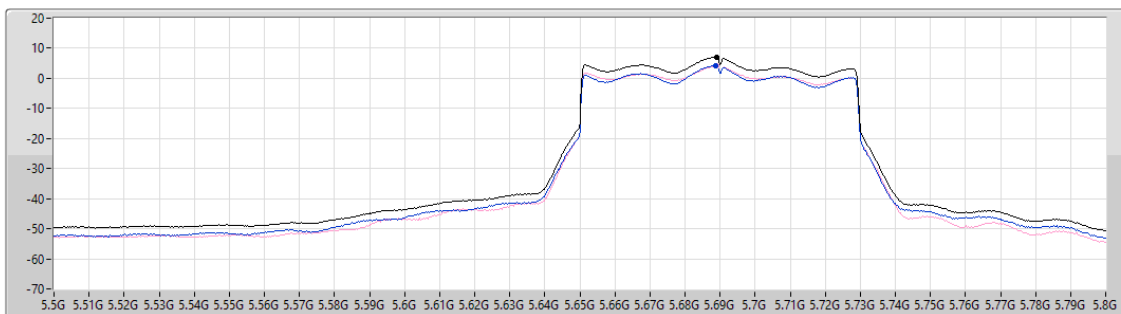

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.09	7.09	4.12	4.05

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5570MHz

15/01/2026

CF (Hz)
5.57G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

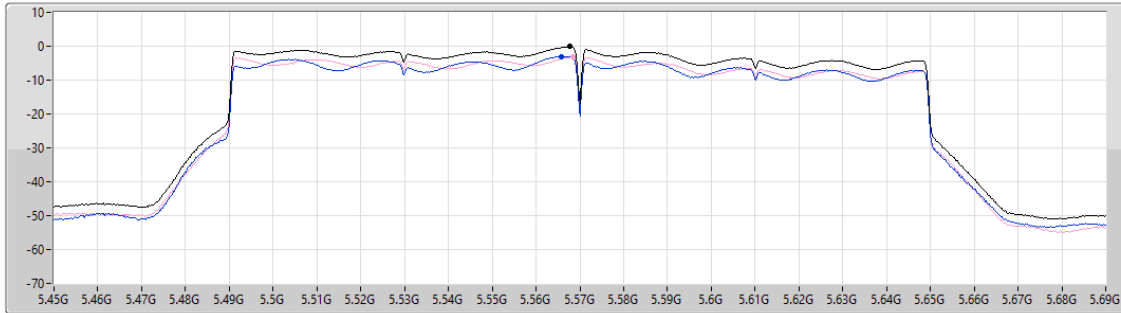

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.15	-0.15	-3.06	-3.12

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5785MHz

15/01/2026

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

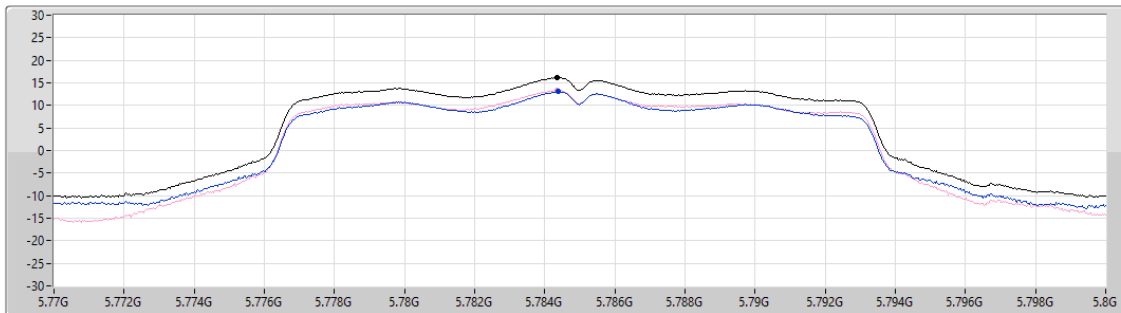

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
16.18	16.18	13.03	13.33

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5785MHz

15/01/2026

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

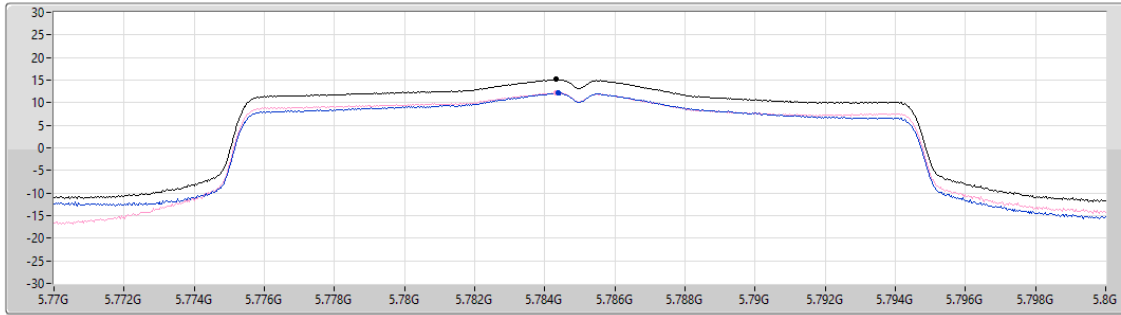

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.16	15.16	12.09	12.23

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5755MHz

15/01/2026

CF (Hz)
5.755G


Span (Hz)
60M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

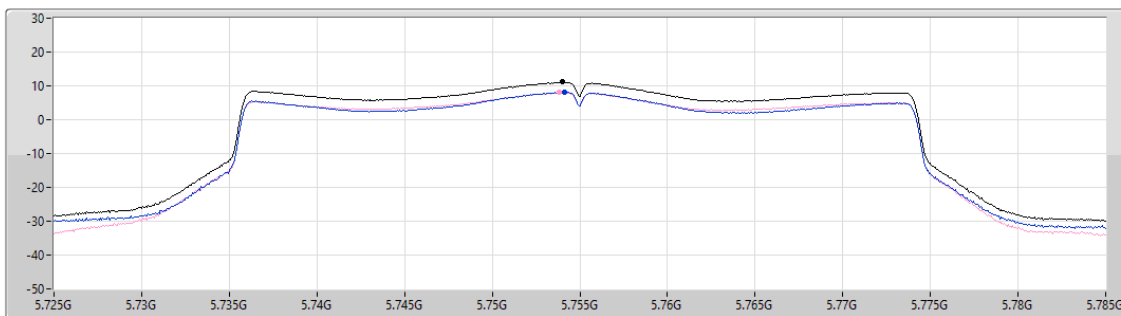

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.10	11.10	8.23	8.08

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5775MHz

15/01/2026

CF (Hz)
5.775G


Span (Hz)
120M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

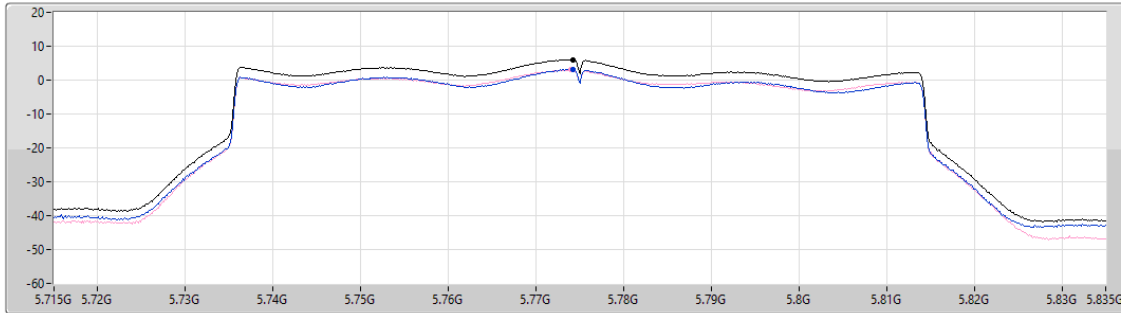

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.09	6.09	3.22	2.97

5.85-5.895GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5865MHz

15/01/2026

CF (Hz)
5.865G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
10.01

Detector Type
RMS

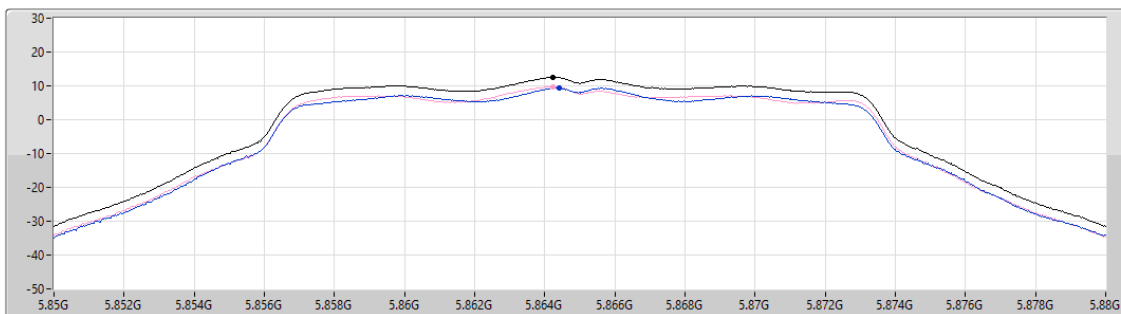

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
12.52	12.52	9.37	9.73

5.85-5.895GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5865MHz

15/01/2026

CF (Hz)
5.865G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

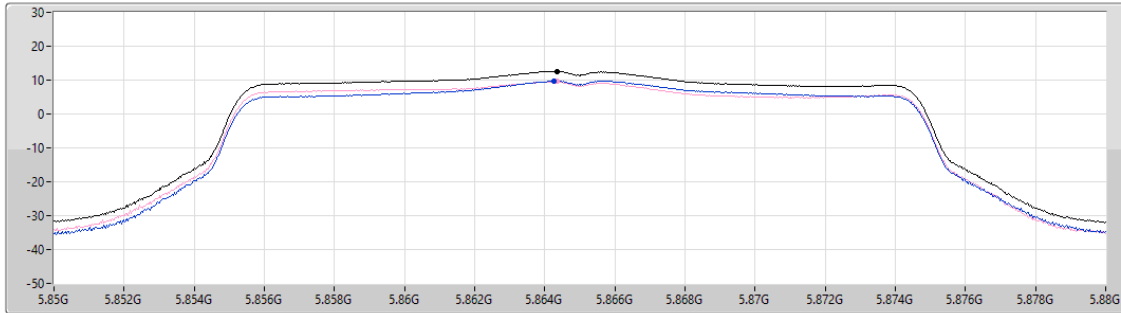

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
12.63	12.63	9.75	9.55

Sum ☒

Port 1 ☐

Port 2 ☐

5.85-5.895GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5835MHz

15/01/2026

CF (Hz)
5.835G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

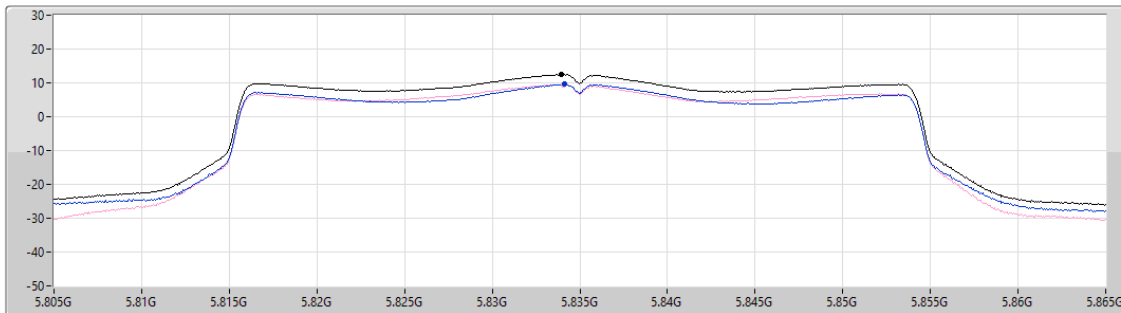

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
12.53	12.53	9.58	9.50

Sum ☒

Port 1 ☐

Port 2 ☐

5.85-5.895GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5855MHz

15/01/2026

CF (Hz)
5.855G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

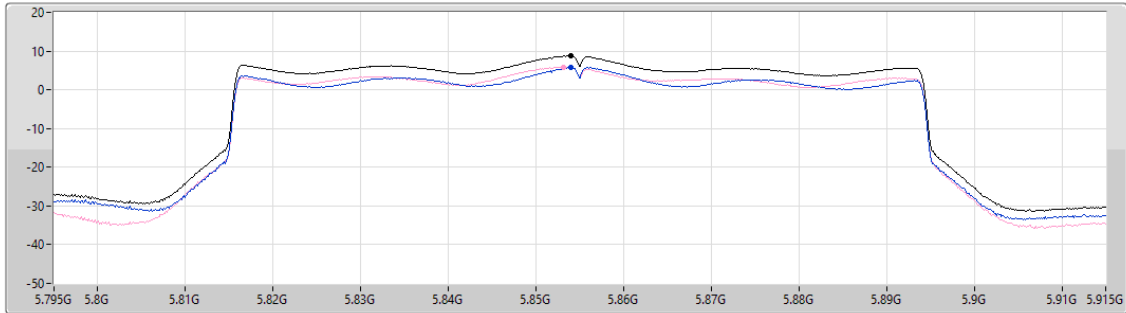

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.83	8.83	5.81	5.89

5.85-5.895GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5815MHz

15/01/2026

CF (Hz)
5.815G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
10.01

Detector Type
RMS

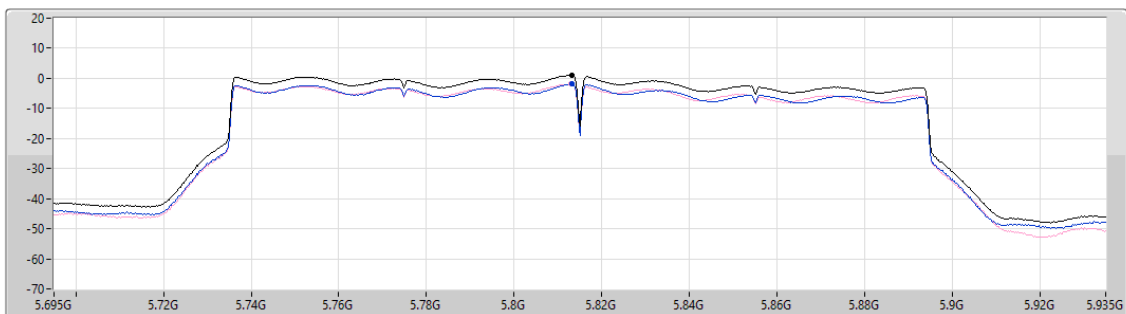

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.10	1.10	-1.84	-1.95



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	30M	29.20	40.00	-10.80	3	Vertical	360	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5775MHz_Adapter	Pass	PK	30M	29.20	40.00	-10.80	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	84.32M	28.51	40.00	-11.49	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	128.94M	29.31	43.50	-14.19	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	202.66M	26.94	43.50	-16.56	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	278.32M	26.19	46.00	-19.81	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	526.64M	31.37	46.00	-14.63	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	82.38M	25.03	40.00	-14.97	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	136.7M	29.76	43.50	-13.74	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	202.66M	32.30	43.50	-11.20	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	276.38M	30.21	46.00	-15.79	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	334.58M	32.04	46.00	-13.96	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	536.34M	29.39	46.00	-16.61	3	Horizontal	0	1.00


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_Adapter

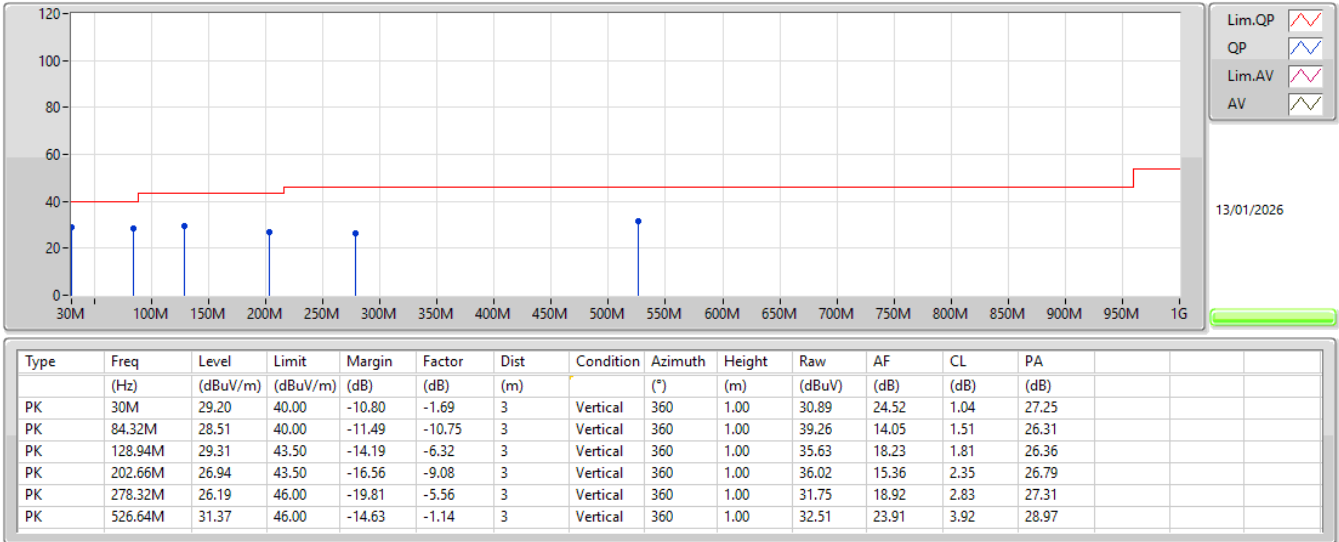

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_Adapter

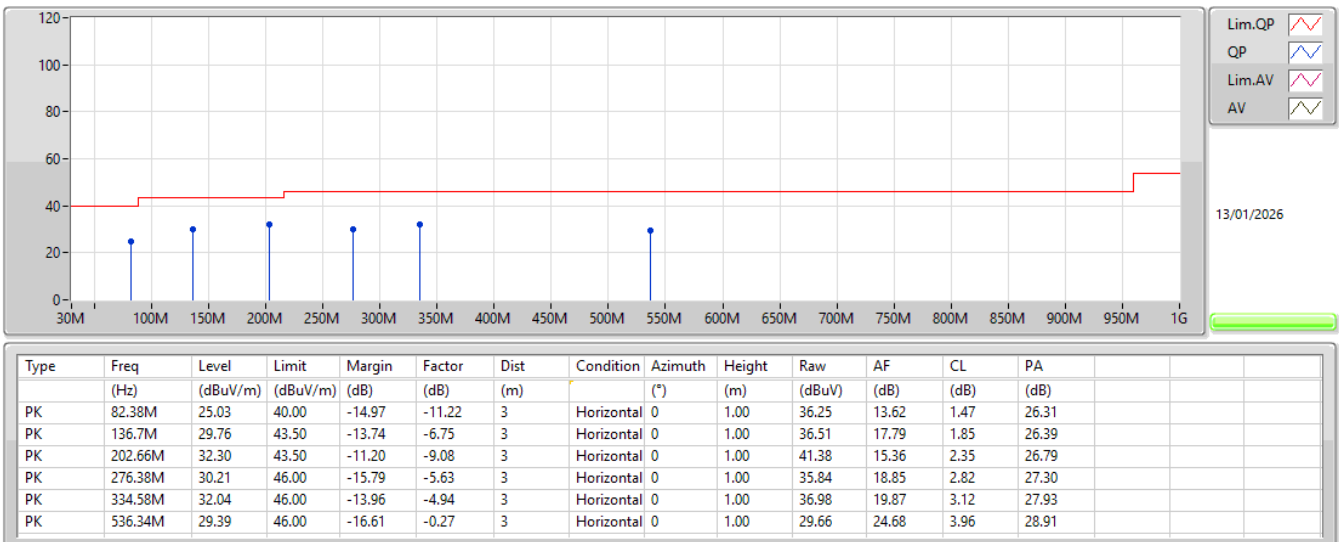

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	5.15G	53.09	54.00	-0.91	3	Horizontal	24	2.02
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	PK	5.14G	72.76	74.00	-1.24	3	Horizontal	357	1.98
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	5.15G	53.32	54.00	-0.68	3	Vertical	29	2.04
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.15G	53.45	54.00	-0.55	3	Horizontal	18	2.02
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	5.136G	53.18	54.00	-0.82	3	Vertical	9	2.05
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	5.35G	53.56	54.00	-0.44	3	Horizontal	15	2.01
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	5.3502G	53.15	54.00	-0.85	3	Horizontal	15	1.97
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	5.35G	53.83	54.00	-0.17	3	Horizontal	14	2.02
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.35G	53.72	54.00	-0.28	3	Horizontal	13	2.04
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	PK	5.469G	68.00	68.20	-0.20	3	Horizontal	13	1.92
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	PK	5.726G	67.93	68.20	-0.27	3	Horizontal	312	1.05
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	PK	5.468G	67.58	68.20	-0.62	3	Vertical	13	1.81
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.46G	53.44	54.00	-0.56	3	Vertical	8	1.78
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	PK	5.4668G	67.55	68.20	-0.65	3	Horizontal	13	2.03
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	PK	5.9294G	67.50	68.20	-0.70	3	Horizontal	25	2.01
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	PK	5.9258G	67.85	68.20	-0.35	3	Vertical	34	2.00
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	PK	5.6374G	67.65	68.20	-0.55	3	Horizontal	31	2.07
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	5.6382G	65.81	68.20	-2.39	3	Vertical	39	1.92
5.85-5.895GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	11.68622G	48.36	54.00	-5.64	3	Horizontal	125	1.79
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	11.69366G	48.19	54.00	-5.81	3	Horizontal	125	1.81
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	PK	5.6518G	66.74	69.53	-2.79	3	Horizontal	299	1.00
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	5.6486G	65.42	68.20	-2.78	3	Horizontal	25	1.99
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	PK	5.608G	66.49	68.20	-1.71	3	Vertical	36	1.89

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	AV	5.15G	52.49	54.00	-1.51	3	Vertical	3	2.09
5180MHz	Pass	AV	5.181G	109.79	Inf	-Inf	3	Vertical	3	2.09
5180MHz	Pass	PK	5.1462G	66.38	74.00	-7.62	3	Vertical	3	2.09
5180MHz	Pass	PK	5.1812G	118.38	Inf	-Inf	3	Vertical	3	2.09
5180MHz	Pass	AV	5.15G	53.09	54.00	-0.91	3	Horizontal	24	2.02
5180MHz	Pass	AV	5.1808G	110.66	Inf	-Inf	3	Horizontal	24	2.02
5180MHz	Pass	PK	5.15G	67.38	74.00	-6.62	3	Horizontal	24	2.02
5180MHz	Pass	PK	5.181G	119.34	Inf	-Inf	3	Horizontal	24	2.02
5180MHz	Pass	PK	10.36264G	60.95	68.20	-7.25	3	Vertical	222	1.49
5180MHz	Pass	PK	10.36054G	61.32	68.20	-6.88	3	Horizontal	159	2.85
5200MHz	Pass	AV	5.15G	51.77	54.00	-2.23	3	Vertical	0	1.84
5200MHz	Pass	AV	5.2008G	111.22	Inf	-Inf	3	Vertical	0	1.84
5200MHz	Pass	PK	5.15G	68.67	74.00	-5.33	3	Vertical	0	1.84
5200MHz	Pass	PK	5.2012G	119.69	Inf	-Inf	3	Vertical	0	1.84
5200MHz	Pass	AV	5.15G	52.26	54.00	-1.74	3	Horizontal	22	2.13
5200MHz	Pass	AV	5.2008G	112.28	Inf	-Inf	3	Horizontal	22	2.13
5200MHz	Pass	PK	5.15G	69.35	74.00	-4.65	3	Horizontal	22	2.13
5200MHz	Pass	PK	5.2008G	120.90	Inf	-Inf	3	Horizontal	22	2.13
5200MHz	Pass	PK	10.40096G	58.87	68.20	-9.33	3	Vertical	223	1.50
5200MHz	Pass	PK	10.40168G	59.49	68.20	-8.71	3	Horizontal	164	2.78
5240MHz	Pass	AV	5.1494G	47.64	54.00	-6.36	3	Vertical	0	1.88
5240MHz	Pass	AV	5.2412G	111.14	Inf	-Inf	3	Vertical	0	1.88
5240MHz	Pass	AV	5.3648G	48.34	54.00	-5.66	3	Vertical	0	1.88
5240MHz	Pass	PK	5.0966G	59.93	74.00	-14.07	3	Vertical	0	1.88
5240MHz	Pass	PK	5.2412G	119.38	Inf	-Inf	3	Vertical	0	1.88
5240MHz	Pass	PK	5.3864G	60.93	74.00	-13.07	3	Vertical	0	1.88
5240MHz	Pass	AV	5.1476G	47.78	54.00	-6.22	3	Horizontal	19	2.09
5240MHz	Pass	AV	5.2406G	112.29	Inf	-Inf	3	Horizontal	19	2.09
5240MHz	Pass	AV	5.3576G	48.36	54.00	-5.64	3	Horizontal	19	2.09
5240MHz	Pass	PK	5.1476G	60.21	74.00	-13.79	3	Horizontal	19	2.09
5240MHz	Pass	PK	5.2406G	120.45	Inf	-Inf	3	Horizontal	19	2.09
5240MHz	Pass	PK	5.3708G	60.36	74.00	-13.64	3	Horizontal	19	2.09
5240MHz	Pass	PK	10.48054G	57.40	68.20	-10.80	3	Vertical	221	1.45
5240MHz	Pass	PK	10.4809G	60.05	68.20	-8.15	3	Horizontal	104	2.19
5260MHz	Pass	AV	5.15G	47.45	54.00	-6.55	3	Vertical	3	1.95
5260MHz	Pass	AV	5.2618G	111.03	Inf	-Inf	3	Vertical	3	1.95
5260MHz	Pass	AV	5.3506G	48.63	54.00	-5.37	3	Vertical	3	1.95
5260MHz	Pass	PK	5.1406G	60.23	74.00	-13.77	3	Vertical	3	1.95
5260MHz	Pass	PK	5.2618G	120.07	Inf	-Inf	3	Vertical	3	1.95
5260MHz	Pass	PK	5.3866G	60.92	74.00	-13.08	3	Vertical	3	1.95
5260MHz	Pass	AV	5.149G	47.40	54.00	-6.60	3	Horizontal	19	2.18
5260MHz	Pass	AV	5.2606G	112.02	Inf	-Inf	3	Horizontal	19	2.18
5260MHz	Pass	AV	5.353G	48.64	54.00	-5.36	3	Horizontal	19	2.18
5260MHz	Pass	PK	5.15G	59.93	74.00	-14.07	3	Horizontal	19	2.18
5260MHz	Pass	PK	5.2606G	120.24	Inf	-Inf	3	Horizontal	19	2.18
5260MHz	Pass	PK	5.3518G	62.06	74.00	-11.94	3	Horizontal	19	2.18
5260MHz	Pass	PK	10.51928G	57.19	68.20	-11.01	3	Vertical	221	1.46
5260MHz	Pass	PK	10.52216G	58.92	68.20	-9.28	3	Horizontal	114	1.16
5300MHz	Pass	AV	5.2984G	110.62	Inf	-Inf	3	Vertical	12	2.02
5300MHz	Pass	AV	5.35G	49.65	54.00	-4.35	3	Vertical	12	2.02
5300MHz	Pass	PK	5.2988G	119.45	Inf	-Inf	3	Vertical	12	2.02
5300MHz	Pass	PK	5.3504G	62.50	74.00	-11.50	3	Vertical	12	2.02
5300MHz	Pass	AV	5.3004G	111.88	Inf	-Inf	3	Horizontal	15	2.06
5300MHz	Pass	AV	5.35G	50.73	54.00	-3.27	3	Horizontal	15	2.06
5300MHz	Pass	PK	5.3008G	120.11	Inf	-Inf	3	Horizontal	15	2.06
5300MHz	Pass	PK	5.3504G	66.17	74.00	-7.83	3	Horizontal	15	2.06
5300MHz	Pass	AV	10.60156G	43.75	54.00	-10.25	3	Vertical	222	1.50
5300MHz	Pass	PK	10.59256G	56.71	68.20	-11.49	3	Vertical	222	1.50
5300MHz	Pass	PK	10.5964G	57.87	68.20	-10.33	3	Horizontal	115	1.04
5320MHz	Pass	AV	5.3188G	109.53	Inf	-Inf	3	Vertical	14	2.00

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5320MHz	Pass	AV	5.3504G	53.16	54.00	-0.84	3	Vertical	14	2.00
5320MHz	Pass	PK	5.3184G	118.31	Inf	-Inf	3	Vertical	14	2.00
5320MHz	Pass	PK	5.3516G	69.68	74.00	-4.32	3	Vertical	14	2.00
5320MHz	Pass	AV	5.3206G	110.69	Inf	-Inf	3	Horizontal	15	2.01
5320MHz	Pass	AV	5.35G	53.56	54.00	-0.44	3	Horizontal	15	2.01
5320MHz	Pass	PK	5.3192G	118.82	Inf	-Inf	3	Horizontal	15	2.01
5320MHz	Pass	PK	5.3504G	66.59	74.00	-7.41	3	Horizontal	15	2.01
5320MHz	Pass	AV	10.6259G	43.06	54.00	-10.94	3	Vertical	227	1.50
5320MHz	Pass	PK	10.63598G	56.12	74.00	-17.88	3	Vertical	227	1.50
5320MHz	Pass	AV	10.63646G	44.17	54.00	-9.83	3	Horizontal	107	1.85
5320MHz	Pass	PK	10.64114G	57.16	74.00	-16.84	3	Horizontal	107	1.85
5500MHz	Pass	AV	5.4598G	49.14	54.00	-4.86	3	Vertical	11	1.92
5500MHz	Pass	AV	5.499G	109.25	Inf	-Inf	3	Vertical	11	1.92
5500MHz	Pass	PK	5.4594G	62.23	74.00	-11.77	3	Vertical	11	1.92
5500MHz	Pass	PK	5.4696G	64.78	68.20	-3.42	3	Vertical	11	1.92
5500MHz	Pass	PK	5.499G	117.45	Inf	-Inf	3	Vertical	11	1.92
5500MHz	Pass	AV	5.457G	49.01	54.00	-4.99	3	Horizontal	13	1.92
5500MHz	Pass	AV	5.5006G	109.23	Inf	-Inf	3	Horizontal	13	1.92
5500MHz	Pass	PK	5.4592G	62.27	74.00	-11.73	3	Horizontal	13	1.92
5500MHz	Pass	PK	5.469G	68.00	68.20	-0.20	3	Horizontal	13	1.92
5500MHz	Pass	PK	5.5006G	117.36	Inf	-Inf	3	Horizontal	13	1.92
5500MHz	Pass	AV	10.99604G	43.47	54.00	-10.53	3	Vertical	229	1.50
5500MHz	Pass	PK	11.00054G	56.69	74.00	-17.31	3	Vertical	229	1.50
5500MHz	Pass	AV	10.99442G	43.34	54.00	-10.66	3	Horizontal	95	1.50
5500MHz	Pass	PK	11.015G	56.29	74.00	-17.71	3	Horizontal	95	1.50
5580MHz	Pass	AV	5.46G	49.37	54.00	-4.63	3	Vertical	9	1.97
5580MHz	Pass	AV	5.5794G	111.81	Inf	-Inf	3	Vertical	9	1.97
5580MHz	Pass	PK	5.46G	62.87	74.00	-11.13	3	Vertical	9	1.97
5580MHz	Pass	PK	5.4648G	65.59	68.20	-2.61	3	Vertical	9	1.97
5580MHz	Pass	PK	5.5788G	119.77	Inf	-Inf	3	Vertical	9	1.97
5580MHz	Pass	PK	5.7264G	59.91	68.20	-8.29	3	Vertical	9	1.97
5580MHz	Pass	AV	5.4564G	49.08	54.00	-4.92	3	Horizontal	34	2.02
5580MHz	Pass	AV	5.5794G	112.96	Inf	-Inf	3	Horizontal	34	2.02
5580MHz	Pass	PK	5.4564G	61.95	74.00	-12.05	3	Horizontal	34	2.02
5580MHz	Pass	PK	5.466G	64.81	68.20	-3.39	3	Horizontal	34	2.02
5580MHz	Pass	PK	5.5794G	120.92	Inf	-Inf	3	Horizontal	34	2.02
5580MHz	Pass	PK	5.73G	59.51	68.20	-8.69	3	Horizontal	34	2.02
5580MHz	Pass	AV	11.16504G	42.89	54.00	-11.11	3	Vertical	159	1.08
5580MHz	Pass	PK	11.15292G	56.36	74.00	-17.64	3	Vertical	159	1.08
5580MHz	Pass	AV	11.16168G	43.21	54.00	-10.79	3	Horizontal	119	1.70
5580MHz	Pass	PK	11.154G	55.55	74.00	-18.45	3	Horizontal	119	1.70
5700MHz	Pass	AV	5.6992G	108.11	Inf	-Inf	3	Vertical	39	1.86
5700MHz	Pass	PK	5.6992G	116.22	Inf	-Inf	3	Vertical	39	1.86
5700MHz	Pass	PK	5.7252G	66.88	68.20	-1.32	3	Vertical	39	1.86
5700MHz	Pass	AV	5.6992G	110.11	Inf	-Inf	3	Horizontal	29	2.08
5700MHz	Pass	PK	5.6992G	118.38	Inf	-Inf	3	Horizontal	29	2.08
5700MHz	Pass	PK	5.7252G	67.32	68.20	-0.88	3	Horizontal	29	2.08
5700MHz	Pass	AV	11.40078G	42.92	54.00	-11.08	3	Vertical	286	1.50
5700MHz	Pass	PK	11.39676G	56.15	74.00	-17.85	3	Vertical	286	1.50
5700MHz	Pass	AV	11.4006G	43.03	54.00	-10.97	3	Horizontal	133	2.41
5700MHz	Pass	PK	11.40306G	56.07	74.00	-17.93	3	Horizontal	133	2.41
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4488G	47.57	54.00	-6.43	3	Vertical	14	2.05
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.72G	111.10	Inf	-Inf	3	Vertical	14	2.05
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4584G	59.61	74.00	-14.39	3	Vertical	14	2.05
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4656G	60.57	68.20	-7.63	3	Vertical	14	2.05
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7212G	119.04	Inf	-Inf	3	Vertical	14	2.05
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.8508G	62.77	68.20	-5.43	3	Vertical	14	2.05
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4524G	47.62	54.00	-6.38	3	Horizontal	29	1.99
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7188G	113.38	Inf	-Inf	3	Horizontal	29	1.99
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4512G	59.33	74.00	-14.67	3	Horizontal	29	1.99
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4668G	59.35	68.20	-8.85	3	Horizontal	29	1.99
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7188G	121.42	Inf	-Inf	3	Horizontal	29	1.99

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.8556G	64.46	68.20	-3.74	3	Horizontal	29	1.99
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44168G	44.54	54.00	-9.46	3	Vertical	220	1.38
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44102G	57.43	74.00	-16.57	3	Vertical	220	1.38
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.4382G	44.32	54.00	-9.68	3	Horizontal	214	2.95
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.43316G	57.80	74.00	-16.20	3	Horizontal	214	2.95
5745MHz	Pass	AV	5.457G	47.43	54.00	-6.57	3	Vertical	12	2.02
5745MHz	Pass	AV	5.7462G	110.48	Inf	-Inf	3	Vertical	12	2.02
5745MHz	Pass	PK	5.6454G	66.78	68.20	-1.42	3	Vertical	12	2.02
5745MHz	Pass	PK	5.7462G	118.53	Inf	-Inf	3	Vertical	12	2.02
5745MHz	Pass	PK	5.9478G	60.79	68.20	-7.41	3	Vertical	12	2.02
5745MHz	Pass	AV	5.4462G	47.37	54.00	-6.63	3	Horizontal	27	2.08
5745MHz	Pass	AV	5.7438G	112.52	Inf	-Inf	3	Horizontal	27	2.08
5745MHz	Pass	PK	5.6454G	66.42	68.20	-1.78	3	Horizontal	27	2.08
5745MHz	Pass	PK	5.7438G	120.66	Inf	-Inf	3	Horizontal	27	2.08
5745MHz	Pass	PK	5.9598G	61.36	68.20	-6.84	3	Horizontal	27	2.08
5745MHz	Pass	AV	11.496G	44.41	54.00	-9.59	3	Vertical	220	1.38
5745MHz	Pass	PK	11.4861G	57.33	74.00	-16.67	3	Vertical	220	1.38
5745MHz	Pass	AV	11.50062G	43.78	54.00	-10.22	3	Horizontal	222	3.00
5745MHz	Pass	PK	11.4825G	57.16	74.00	-16.84	3	Horizontal	222	3.00
5785MHz	Pass	AV	5.78613G	111.09	Inf	-Inf	3	Vertical	11	1.96
5785MHz	Pass	PK	5.6494G	63.68	68.20	-4.52	3	Vertical	11	1.96
5785MHz	Pass	PK	5.78613G	119.78	Inf	-Inf	3	Vertical	11	1.96
5785MHz	Pass	PK	5.93617G	63.38	68.20	-4.82	3	Vertical	11	1.96
5785MHz	Pass	AV	5.78371G	113.22	Inf	-Inf	3	Horizontal	25	2.02
5785MHz	Pass	PK	5.64456G	64.16	68.20	-4.04	3	Horizontal	25	2.02
5785MHz	Pass	PK	5.78371G	121.35	Inf	-Inf	3	Horizontal	25	2.02
5785MHz	Pass	PK	5.93859G	64.54	68.20	-3.66	3	Horizontal	25	2.02
5785MHz	Pass	AV	11.5664G	46.03	54.00	-7.97	3	Vertical	220	1.42
5785MHz	Pass	PK	11.5628G	59.08	74.00	-14.92	3	Vertical	220	1.42
5785MHz	Pass	AV	11.5661G	45.84	54.00	-8.16	3	Horizontal	130	2.14
5785MHz	Pass	PK	11.56886G	58.76	74.00	-15.24	3	Horizontal	130	2.14
5825MHz	Pass	AV	5.825G	110.60	Inf	-Inf	3	Vertical	11	2.06
5825MHz	Pass	PK	5.5598G	60.25	68.20	-7.95	3	Vertical	11	2.06
5825MHz	Pass	PK	5.8262G	118.61	Inf	-Inf	3	Vertical	11	2.06
5825MHz	Pass	PK	5.927G	65.46	68.20	-2.74	3	Vertical	11	2.06
5825MHz	Pass	AV	5.8238G	112.57	Inf	-Inf	3	Horizontal	25	2.01
5825MHz	Pass	PK	5.5826G	60.62	68.20	-7.58	3	Horizontal	25	2.01
5825MHz	Pass	PK	5.8238G	120.58	Inf	-Inf	3	Horizontal	25	2.01
5825MHz	Pass	PK	5.9294G	67.50	68.20	-0.70	3	Horizontal	25	2.01
5825MHz	Pass	AV	11.65186G	45.37	54.00	-8.63	3	Vertical	221	1.38
5825MHz	Pass	PK	11.65258G	58.74	74.00	-15.26	3	Vertical	221	1.38
5825MHz	Pass	AV	11.65102G	46.14	54.00	-7.86	3	Horizontal	125	1.77
5825MHz	Pass	PK	11.65114G	59.39	74.00	-14.61	3	Horizontal	125	1.77
5845MHz	Pass	AV	5.8462G	110.85	Inf	-Inf	3	Vertical	14	2.04
5845MHz	Pass	AV	5.9254G	59.42	88.20	-28.78	3	Vertical	14	2.04
5845MHz	Pass	PK	5.5534G	60.29	68.20	-7.91	3	Vertical	14	2.04
5845MHz	Pass	PK	5.845G	119.02	Inf	-Inf	3	Vertical	14	2.04
5845MHz	Pass	PK	5.929G	72.94	108.20	-35.26	3	Vertical	14	2.04
5845MHz	Pass	AV	5.8438G	112.99	Inf	-Inf	3	Horizontal	25	2.09
5845MHz	Pass	AV	5.9242G	59.77	88.79	-29.02	3	Horizontal	25	2.09
5845MHz	Pass	PK	5.6494G	60.09	68.20	-8.11	3	Horizontal	25	2.09
5845MHz	Pass	PK	5.8438G	121.06	Inf	-Inf	3	Horizontal	25	2.09
5845MHz	Pass	PK	5.9242G	76.10	108.79	-32.69	3	Horizontal	25	2.09
5845MHz	Pass	AV	11.6918G	46.66	54.00	-7.34	3	Vertical	222	1.45
5845MHz	Pass	PK	11.68238G	60.20	74.00	-13.80	3	Vertical	222	1.45
5845MHz	Pass	AV	11.68622G	48.36	54.00	-5.64	3	Horizontal	125	1.79
5845MHz	Pass	PK	11.69036G	61.30	74.00	-12.70	3	Horizontal	125	1.79
5865MHz	Pass	AV	5.865G	111.02	Inf	-Inf	3	Vertical	12	2.01
5865MHz	Pass	AV	5.9262G	62.38	88.20	-25.82	3	Vertical	12	2.01
5865MHz	Pass	PK	5.5758G	59.56	68.20	-8.64	3	Vertical	12	2.01
5865MHz	Pass	PK	5.8662G	118.93	Inf	-Inf	3	Vertical	12	2.01
5865MHz	Pass	PK	5.9262G	77.28	108.20	-30.92	3	Vertical	12	2.01

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5865MHz	Pass	AV	5.8638G	112.90	Inf	-Inf	3	Horizontal	25	1.96
5865MHz	Pass	AV	5.925G	62.59	88.20	-25.61	3	Horizontal	25	1.96
5865MHz	Pass	PK	5.619G	60.51	68.20	-7.69	3	Horizontal	25	1.96
5865MHz	Pass	PK	5.8638G	120.96	Inf	-Inf	3	Horizontal	25	1.96
5865MHz	Pass	PK	5.9286G	77.76	108.20	-30.44	3	Horizontal	25	1.96
5865MHz	Pass	AV	11.72718G	46.02	54.00	-7.98	3	Vertical	221	1.38
5865MHz	Pass	PK	11.72334G	59.14	74.00	-14.86	3	Vertical	221	1.38
5865MHz	Pass	AV	11.73132G	47.21	54.00	-6.79	3	Horizontal	131	1.70
5865MHz	Pass	PK	11.72616G	60.03	74.00	-13.97	3	Horizontal	131	1.70
5885MHz	Pass	AV	5.8862G	110.44	Inf	-Inf	3	Vertical	11	2.13
5885MHz	Pass	AV	5.8958G	88.91	109.61	-20.70	3	Vertical	11	2.13
5885MHz	Pass	PK	5.6102G	60.35	68.20	-7.85	3	Vertical	11	2.13
5885MHz	Pass	PK	5.8862G	118.48	Inf	-Inf	3	Vertical	11	2.13
5885MHz	Pass	PK	5.9258G	80.78	108.20	-27.42	3	Vertical	11	2.13
5885MHz	Pass	AV	5.8838G	112.93	Inf	-Inf	3	Horizontal	26	1.91
5885MHz	Pass	AV	5.9246G	69.11	88.49	-19.38	3	Horizontal	26	1.91
5885MHz	Pass	PK	5.5994G	60.86	68.20	-7.34	3	Horizontal	26	1.91
5885MHz	Pass	PK	5.8838G	120.96	Inf	-Inf	3	Horizontal	26	1.91
5885MHz	Pass	PK	5.9246G	83.14	108.49	-25.35	3	Horizontal	26	1.91
5885MHz	Pass	AV	11.76706G	45.81	54.00	-8.19	3	Vertical	222	1.36
5885MHz	Pass	PK	11.76634G	58.79	74.00	-15.21	3	Vertical	222	1.36
5885MHz	Pass	AV	11.76658G	47.97	54.00	-6.03	3	Horizontal	125	1.78
5885MHz	Pass	PK	11.77102G	61.33	74.00	-12.67	3	Horizontal	125	1.78
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	AV	5.1496G	52.62	54.00	-1.38	3	Vertical	28	2.01
5180MHz	Pass	AV	5.1808G	108.36	Inf	-Inf	3	Vertical	28	2.01
5180MHz	Pass	PK	5.15G	65.68	74.00	-8.32	3	Vertical	28	2.01
5180MHz	Pass	PK	5.1792G	119.54	Inf	-Inf	3	Vertical	28	2.01
5180MHz	Pass	AV	5.15G	52.66	54.00	-1.34	3	Horizontal	357	1.64
5180MHz	Pass	AV	5.1806G	108.16	Inf	-Inf	3	Horizontal	357	1.64
5180MHz	Pass	PK	5.1408G	67.31	74.00	-6.69	3	Horizontal	357	1.64
5180MHz	Pass	PK	5.181G	119.94	Inf	-Inf	3	Horizontal	357	1.64
5180MHz	Pass	PK	10.36006G	60.66	68.20	-7.54	3	Vertical	222	1.48
5180MHz	Pass	PK	10.3642G	60.83	68.20	-7.37	3	Horizontal	163	2.76
5200MHz	Pass	AV	5.15G	51.73	54.00	-2.27	3	Vertical	21	1.99
5200MHz	Pass	AV	5.1992G	109.47	Inf	-Inf	3	Vertical	21	1.99
5200MHz	Pass	PK	5.136G	69.08	74.00	-4.92	3	Vertical	21	1.99
5200MHz	Pass	PK	5.1984G	120.98	Inf	-Inf	3	Vertical	21	1.99
5200MHz	Pass	AV	5.1496G	51.95	54.00	-2.05	3	Horizontal	357	1.98
5200MHz	Pass	AV	5.2004G	109.81	Inf	-Inf	3	Horizontal	357	1.98
5200MHz	Pass	PK	5.14G	72.76	74.00	-1.24	3	Horizontal	357	1.98
5200MHz	Pass	PK	5.2G	121.03	Inf	-Inf	3	Horizontal	357	1.98
5200MHz	Pass	PK	10.4006G	60.03	68.20	-8.17	3	Vertical	221	1.50
5200MHz	Pass	PK	10.40624G	59.13	68.20	-9.07	3	Horizontal	163	2.93
5240MHz	Pass	AV	5.15G	48.61	54.00	-5.39	3	Vertical	20	1.80
5240MHz	Pass	AV	5.2388G	109.99	Inf	-Inf	3	Vertical	20	1.80
5240MHz	Pass	AV	5.351G	48.45	54.00	-5.55	3	Vertical	20	1.80
5240MHz	Pass	PK	5.15G	63.51	74.00	-10.49	3	Vertical	20	1.80
5240MHz	Pass	PK	5.2406G	120.66	Inf	-Inf	3	Vertical	20	1.80
5240MHz	Pass	PK	5.3636G	60.62	74.00	-13.38	3	Vertical	20	1.80
5240MHz	Pass	AV	5.15G	50.31	54.00	-3.69	3	Horizontal	16	2.09
5240MHz	Pass	AV	5.2406G	111.79	Inf	-Inf	3	Horizontal	16	2.09
5240MHz	Pass	AV	5.3516G	48.97	54.00	-5.03	3	Horizontal	16	2.09
5240MHz	Pass	PK	5.147G	64.98	74.00	-9.02	3	Horizontal	16	2.09
5240MHz	Pass	PK	5.2406G	122.80	Inf	-Inf	3	Horizontal	16	2.09
5240MHz	Pass	PK	5.354G	61.18	74.00	-12.82	3	Horizontal	16	2.09
5240MHz	Pass	PK	10.46818G	57.26	68.20	-10.94	3	Vertical	220	1.52
5240MHz	Pass	PK	10.48096G	59.65	68.20	-8.55	3	Horizontal	114	1.10
5260MHz	Pass	AV	5.15G	47.55	54.00	-6.45	3	Vertical	22	2.01
5260MHz	Pass	AV	5.2594G	110.24	Inf	-Inf	3	Vertical	22	2.01
5260MHz	Pass	AV	5.3506G	48.74	54.00	-5.26	3	Vertical	22	2.01
5260MHz	Pass	PK	5.1448G	59.46	74.00	-14.54	3	Vertical	22	2.01

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5260MHz	Pass	PK	5.2606G	121.19	Inf	-Inf	3	Vertical	22	2.01
5260MHz	Pass	PK	5.353G	62.84	74.00	-11.16	3	Vertical	22	2.01
5260MHz	Pass	AV	5.15G	48.93	54.00	-5.07	3	Horizontal	12	2.18
5260MHz	Pass	AV	5.2606G	111.47	Inf	-Inf	3	Horizontal	12	2.18
5260MHz	Pass	AV	5.3506G	50.97	54.00	-3.03	3	Horizontal	12	2.18
5260MHz	Pass	PK	5.1478G	61.91	74.00	-12.09	3	Horizontal	12	2.18
5260MHz	Pass	PK	5.2594G	123.07	Inf	-Inf	3	Horizontal	12	2.18
5260MHz	Pass	PK	5.3554G	65.33	74.00	-8.67	3	Horizontal	12	2.18
5260MHz	Pass	PK	10.52324G	56.83	68.20	-11.37	3	Vertical	221	1.50
5260MHz	Pass	PK	10.5251G	59.14	68.20	-9.06	3	Horizontal	113	1.91
5300MHz	Pass	AV	5.2916G	108.44	Inf	-Inf	3	Vertical	10	2.02
5300MHz	Pass	AV	5.3504G	50.47	54.00	-3.53	3	Vertical	10	2.02
5300MHz	Pass	PK	5.2908G	120.59	Inf	-Inf	3	Vertical	10	2.02
5300MHz	Pass	PK	5.3518G	63.58	74.00	-10.42	3	Vertical	10	2.02
5300MHz	Pass	AV	5.3008G	110.91	Inf	-Inf	3	Horizontal	13	2.28
5300MHz	Pass	AV	5.35G	52.96	54.00	-1.04	3	Horizontal	13	2.28
5300MHz	Pass	PK	5.2992G	122.49	Inf	-Inf	3	Horizontal	13	2.28
5300MHz	Pass	PK	5.358G	69.36	74.00	-4.64	3	Horizontal	13	2.28
5300MHz	Pass	PK	10.59712G	57.11	68.20	-11.09	3	Vertical	220	1.56
5300MHz	Pass	PK	10.60918G	56.45	74.00	-17.55	3	Horizontal	156	1.56
5320MHz	Pass	AV	5.319G	107.43	Inf	-Inf	3	Vertical	19	1.90
5320MHz	Pass	AV	5.35G	51.84	54.00	-2.16	3	Vertical	19	1.90
5320MHz	Pass	PK	5.3188G	118.50	Inf	-Inf	3	Vertical	19	1.90
5320MHz	Pass	PK	5.3632G	69.19	74.00	-4.81	3	Vertical	19	1.90
5320MHz	Pass	AV	5.3206G	109.68	Inf	-Inf	3	Horizontal	15	1.97
5320MHz	Pass	AV	5.3502G	53.15	54.00	-0.85	3	Horizontal	15	1.97
5320MHz	Pass	PK	5.3194G	121.04	Inf	-Inf	3	Horizontal	15	1.97
5320MHz	Pass	PK	5.3534G	67.41	74.00	-6.59	3	Horizontal	15	1.97
5320MHz	Pass	AV	10.62734G	43.05	54.00	-10.95	3	Vertical	220	1.50
5320MHz	Pass	PK	10.63106G	56.89	74.00	-17.11	3	Vertical	220	1.50
5320MHz	Pass	AV	10.62896G	43.57	54.00	-10.43	3	Horizontal	105	1.87
5320MHz	Pass	PK	10.62584G	56.95	74.00	-17.05	3	Horizontal	105	1.87
5500MHz	Pass	AV	5.46G	49.19	54.00	-4.81	3	Vertical	13	1.92
5500MHz	Pass	AV	5.499G	107.19	Inf	-Inf	3	Vertical	13	1.92
5500MHz	Pass	PK	5.454G	61.46	74.00	-12.54	3	Vertical	13	1.92
5500MHz	Pass	PK	5.4684G	63.22	68.20	-4.98	3	Vertical	13	1.92
5500MHz	Pass	PK	5.4992G	118.62	Inf	-Inf	3	Vertical	13	1.92
5500MHz	Pass	AV	5.4598G	49.52	54.00	-4.48	3	Horizontal	13	2.04
5500MHz	Pass	AV	5.5006G	107.81	Inf	-Inf	3	Horizontal	13	2.04
5500MHz	Pass	PK	5.458G	61.60	74.00	-12.40	3	Horizontal	13	2.04
5500MHz	Pass	PK	5.4644G	64.81	68.20	-3.39	3	Horizontal	13	2.04
5500MHz	Pass	PK	5.4992G	119.22	Inf	-Inf	3	Horizontal	13	2.04
5500MHz	Pass	AV	10.99478G	43.18	54.00	-10.82	3	Vertical	67	1.50
5500MHz	Pass	PK	10.99538G	57.14	74.00	-16.86	3	Vertical	67	1.50
5500MHz	Pass	AV	10.99346G	43.18	54.00	-10.82	3	Horizontal	13	1.37
5500MHz	Pass	PK	10.98938G	56.26	74.00	-17.74	3	Horizontal	13	1.37
5580MHz	Pass	AV	5.46G	49.69	54.00	-4.31	3	Vertical	16	2.08
5580MHz	Pass	AV	5.5794G	110.48	Inf	-Inf	3	Vertical	16	2.08
5580MHz	Pass	PK	5.4594G	62.07	74.00	-11.93	3	Vertical	16	2.08
5580MHz	Pass	PK	5.4636G	64.65	68.20	-3.55	3	Vertical	16	2.08
5580MHz	Pass	PK	5.5812G	120.65	Inf	-Inf	3	Vertical	16	2.08
5580MHz	Pass	PK	5.73G	60.11	68.20	-8.09	3	Vertical	16	2.08
5580MHz	Pass	AV	5.46G	49.90	54.00	-4.10	3	Horizontal	36	2.03
5580MHz	Pass	AV	5.5788G	112.16	Inf	-Inf	3	Horizontal	36	2.03
5580MHz	Pass	PK	5.4594G	64.79	74.00	-9.21	3	Horizontal	36	2.03
5580MHz	Pass	PK	5.4648G	66.91	68.20	-1.29	3	Horizontal	36	2.03
5580MHz	Pass	PK	5.5806G	123.25	Inf	-Inf	3	Horizontal	36	2.03
5580MHz	Pass	PK	5.7252G	59.49	68.20	-8.71	3	Horizontal	36	2.03
5580MHz	Pass	AV	11.17212G	42.85	54.00	-11.15	3	Vertical	73	1.50
5580MHz	Pass	PK	11.15226G	56.26	74.00	-17.74	3	Vertical	73	1.50
5580MHz	Pass	AV	11.172G	42.88	54.00	-11.12	3	Horizontal	188	1.44
5580MHz	Pass	PK	11.15658G	56.14	74.00	-17.86	3	Horizontal	188	1.44

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5700MHz	Pass	AV	5.6992G	107.55	Inf	-Inf	3	Vertical	25	1.00
5700MHz	Pass	PK	5.6992G	119.48	Inf	-Inf	3	Vertical	25	1.00
5700MHz	Pass	PK	5.7252G	67.76	68.20	-0.44	3	Vertical	25	1.00
5700MHz	Pass	AV	5.6992G	109.00	Inf	-Inf	3	Horizontal	312	1.05
5700MHz	Pass	PK	5.6988G	120.40	Inf	-Inf	3	Horizontal	312	1.05
5700MHz	Pass	PK	5.726G	67.93	68.20	-0.27	3	Horizontal	312	1.05
5700MHz	Pass	AV	11.4033G	43.15	54.00	-10.85	3	Vertical	226	3.00
5700MHz	Pass	PK	11.38902G	55.63	74.00	-18.37	3	Vertical	226	3.00
5700MHz	Pass	AV	11.39946G	43.07	54.00	-10.93	3	Horizontal	3	3.00
5700MHz	Pass	PK	11.40606G	55.65	74.00	-18.35	3	Horizontal	3	3.00
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4524G	47.80	54.00	-6.20	3	Vertical	11	2.03
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.72G	111.18	Inf	-Inf	3	Vertical	11	2.03
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4428G	60.39	74.00	-13.61	3	Vertical	11	2.03
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.468G	59.53	68.20	-8.67	3	Vertical	11	2.03
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7188G	121.36	Inf	-Inf	3	Vertical	11	2.03
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.8652G	66.81	68.20	-1.39	3	Vertical	11	2.03
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.456G	47.71	54.00	-6.29	3	Horizontal	343	1.04
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7188G	111.68	Inf	-Inf	3	Horizontal	343	1.04
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.456G	59.84	74.00	-14.16	3	Horizontal	343	1.04
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4668G	59.86	68.20	-8.34	3	Horizontal	343	1.04
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.72G	121.61	Inf	-Inf	3	Horizontal	343	1.04
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.8628G	65.65	68.20	-2.55	3	Horizontal	343	1.04
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.4415G	44.34	54.00	-9.66	3	Vertical	221	2.46
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44504G	57.49	74.00	-16.51	3	Vertical	221	2.46
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44174G	44.08	54.00	-9.92	3	Horizontal	131	2.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44282G	56.72	74.00	-17.28	3	Horizontal	131	2.50
5745MHz	Pass	AV	5.4498G	47.29	54.00	-6.71	3	Vertical	9	2.01
5745MHz	Pass	AV	5.7438G	109.67	Inf	-Inf	3	Vertical	9	2.01
5745MHz	Pass	PK	5.6478G	64.40	68.20	-3.80	3	Vertical	9	2.01
5745MHz	Pass	PK	5.7462G	120.17	Inf	-Inf	3	Vertical	9	2.01
5745MHz	Pass	PK	5.9298G	61.39	68.20	-6.81	3	Vertical	9	2.01
5745MHz	Pass	AV	5.4558G	47.43	54.00	-6.57	3	Horizontal	30	2.12
5745MHz	Pass	AV	5.7438G	110.97	Inf	-Inf	3	Horizontal	30	2.12
5745MHz	Pass	PK	5.6466G	64.86	68.20	-3.34	3	Horizontal	30	2.12
5745MHz	Pass	PK	5.7438G	121.08	Inf	-Inf	3	Horizontal	30	2.12
5745MHz	Pass	PK	5.937G	61.25	68.20	-6.95	3	Horizontal	30	2.12
5745MHz	Pass	AV	11.50026G	43.66	54.00	-10.34	3	Vertical	224	1.49
5745MHz	Pass	PK	11.48586G	57.03	74.00	-16.97	3	Vertical	224	1.49
5745MHz	Pass	AV	11.49876G	43.60	54.00	-10.40	3	Horizontal	286	1.75
5745MHz	Pass	PK	11.47896G	56.64	74.00	-17.36	3	Horizontal	286	1.75
5785MHz	Pass	AV	5.78492G	110.43	Inf	-Inf	3	Vertical	10	2.26
5785MHz	Pass	PK	5.64577G	63.06	68.20	-5.14	3	Vertical	10	2.26
5785MHz	Pass	PK	5.78613G	120.71	Inf	-Inf	3	Vertical	10	2.26
5785MHz	Pass	PK	5.93133G	65.07	68.20	-3.13	3	Vertical	10	2.26
5785MHz	Pass	AV	5.78371G	111.69	Inf	-Inf	3	Horizontal	29	1.92
5785MHz	Pass	PK	5.64335G	65.16	68.20	-3.04	3	Horizontal	29	1.92
5785MHz	Pass	PK	5.78371G	122.75	Inf	-Inf	3	Horizontal	29	1.92
5785MHz	Pass	PK	5.9277G	66.79	68.20	-1.41	3	Horizontal	29	1.92
5785MHz	Pass	AV	11.5712G	44.60	54.00	-9.40	3	Vertical	225	1.50
5785MHz	Pass	PK	11.57438G	57.70	74.00	-16.30	3	Vertical	225	1.50
5785MHz	Pass	AV	11.57168G	45.16	54.00	-8.84	3	Horizontal	130	1.98
5785MHz	Pass	PK	11.57078G	58.24	74.00	-15.76	3	Horizontal	130	1.98
5825MHz	Pass	AV	5.8238G	108.67	Inf	-Inf	3	Vertical	34	2.00
5825MHz	Pass	PK	5.5514G	61.44	68.20	-6.76	3	Vertical	34	2.00
5825MHz	Pass	PK	5.8238G	119.42	Inf	-Inf	3	Vertical	34	2.00
5825MHz	Pass	PK	5.9258G	67.85	68.20	-0.35	3	Vertical	34	2.00
5825MHz	Pass	AV	5.8238G	111.38	Inf	-Inf	3	Horizontal	27	1.99
5825MHz	Pass	PK	5.627G	60.42	68.20	-7.78	3	Horizontal	27	1.99
5825MHz	Pass	PK	5.8238G	123.59	Inf	-Inf	3	Horizontal	27	1.99
5825MHz	Pass	PK	5.9258G	67.79	68.20	-0.41	3	Horizontal	27	1.99
5825MHz	Pass	AV	11.65336G	44.55	54.00	-9.45	3	Vertical	222	1.38
5825MHz	Pass	PK	11.64082G	58.59	74.00	-15.41	3	Vertical	222	1.38

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5825MHz	Pass	AV	11.65252G	45.63	54.00	-8.37	3	Horizontal	125	1.76
5825MHz	Pass	PK	11.6515G	58.83	74.00	-15.17	3	Horizontal	125	1.76
5845MHz	Pass	AV	5.8438G	109.56	Inf	-Inf	3	Vertical	46	2.07
5845MHz	Pass	AV	5.9254G	63.13	88.20	-25.07	3	Vertical	46	2.07
5845MHz	Pass	PK	5.6398G	60.35	68.20	-7.85	3	Vertical	46	2.07
5845MHz	Pass	PK	5.8438G	120.77	Inf	-Inf	3	Vertical	46	2.07
5845MHz	Pass	PK	5.9254G	79.67	108.20	-28.53	3	Vertical	46	2.07
5845MHz	Pass	AV	5.8438G	111.41	Inf	-Inf	3	Horizontal	26	2.07
5845MHz	Pass	AV	5.9242G	63.91	88.79	-24.88	3	Horizontal	26	2.07
5845MHz	Pass	PK	5.623G	60.01	68.20	-8.19	3	Horizontal	26	2.07
5845MHz	Pass	PK	5.839G	122.08	Inf	-Inf	3	Horizontal	26	2.07
5845MHz	Pass	PK	5.9254G	79.81	108.20	-28.39	3	Horizontal	26	2.07
5845MHz	Pass	AV	11.6942G	46.24	54.00	-7.76	3	Vertical	222	1.39
5845MHz	Pass	PK	11.69564G	59.35	74.00	-14.65	3	Vertical	222	1.39
5845MHz	Pass	AV	11.69366G	48.19	54.00	-5.81	3	Horizontal	125	1.81
5845MHz	Pass	PK	11.6954G	62.13	74.00	-11.87	3	Horizontal	125	1.81
5865MHz	Pass	AV	5.8662G	109.29	Inf	-Inf	3	Vertical	29	1.11
5865MHz	Pass	AV	5.925G	67.73	88.20	-20.47	3	Vertical	29	1.11
5865MHz	Pass	PK	5.5662G	60.23	68.20	-7.97	3	Vertical	29	1.11
5865MHz	Pass	PK	5.8674G	119.81	Inf	-Inf	3	Vertical	29	1.11
5865MHz	Pass	PK	5.9274G	82.52	108.20	-25.68	3	Vertical	29	1.11
5865MHz	Pass	AV	5.8638G	111.69	Inf	-Inf	3	Horizontal	26	1.86
5865MHz	Pass	AV	5.925G	68.43	88.20	-19.77	3	Horizontal	26	1.86
5865MHz	Pass	PK	5.6298G	60.96	68.20	-7.24	3	Horizontal	26	1.86
5865MHz	Pass	PK	5.8638G	122.52	Inf	-Inf	3	Horizontal	26	1.86
5865MHz	Pass	PK	5.9406G	83.84	108.20	-24.36	3	Horizontal	26	1.86
5865MHz	Pass	AV	11.73612G	45.58	54.00	-8.42	3	Vertical	222	1.36
5865MHz	Pass	PK	11.72892G	58.47	74.00	-15.53	3	Vertical	222	1.36
5865MHz	Pass	AV	11.73594G	47.48	54.00	-6.52	3	Horizontal	125	1.78
5865MHz	Pass	PK	11.7366G	61.32	74.00	-12.68	3	Horizontal	125	1.78
5885MHz	Pass	AV	5.8838G	108.83	Inf	-Inf	3	Vertical	33	1.92
5885MHz	Pass	AV	5.9246G	71.88	88.49	-16.61	3	Vertical	33	1.92
5885MHz	Pass	PK	5.6366G	59.34	68.20	-8.86	3	Vertical	33	1.92
5885MHz	Pass	PK	5.8838G	119.69	Inf	-Inf	3	Vertical	33	1.92
5885MHz	Pass	PK	5.9246G	87.75	108.49	-20.74	3	Vertical	33	1.92
5885MHz	Pass	AV	5.8838G	111.89	Inf	-Inf	3	Horizontal	26	1.90
5885MHz	Pass	AV	5.9234G	75.19	89.37	-14.18	3	Horizontal	26	1.90
5885MHz	Pass	PK	5.585G	59.68	68.20	-8.52	3	Horizontal	26	1.90
5885MHz	Pass	PK	5.8826G	122.05	Inf	-Inf	3	Horizontal	26	1.90
5885MHz	Pass	PK	5.9234G	91.26	109.37	-18.11	3	Horizontal	26	1.90
5885MHz	Pass	AV	11.76166G	45.43	54.00	-8.57	3	Vertical	221	1.46
5885MHz	Pass	PK	11.76568G	58.20	74.00	-15.80	3	Vertical	221	1.46
5885MHz	Pass	AV	11.7736G	46.91	54.00	-7.09	3	Horizontal	119	1.86
5885MHz	Pass	PK	11.75866G	60.49	74.00	-13.51	3	Horizontal	119	1.86
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	AV	5.15G	53.32	54.00	-0.68	3	Vertical	29	2.04
5190MHz	Pass	AV	5.1908G	102.94	Inf	-Inf	3	Vertical	29	2.04
5190MHz	Pass	PK	5.1476G	65.90	74.00	-8.10	3	Vertical	29	2.04
5190MHz	Pass	PK	5.1908G	115.18	Inf	-Inf	3	Vertical	29	2.04
5190MHz	Pass	AV	5.15G	51.18	54.00	-2.82	3	Horizontal	357	1.82
5190MHz	Pass	AV	5.1908G	102.95	Inf	-Inf	3	Horizontal	357	1.82
5190MHz	Pass	PK	5.1472G	63.39	74.00	-10.61	3	Horizontal	357	1.82
5190MHz	Pass	PK	5.1908G	114.30	Inf	-Inf	3	Horizontal	357	1.82
5190MHz	Pass	PK	10.38018G	57.06	68.20	-11.14	3	Vertical	221	1.46
5190MHz	Pass	PK	10.38132G	58.14	68.20	-10.06	3	Horizontal	162	2.81
5230MHz	Pass	AV	5.15G	51.67	54.00	-2.33	3	Vertical	27	1.92
5230MHz	Pass	AV	5.2308G	107.24	Inf	-Inf	3	Vertical	27	1.92
5230MHz	Pass	PK	5.1496G	67.09	74.00	-6.91	3	Vertical	27	1.92
5230MHz	Pass	PK	5.2312G	119.25	Inf	-Inf	3	Vertical	27	1.92
5230MHz	Pass	AV	5.15G	53.11	54.00	-0.89	3	Horizontal	17	2.09
5230MHz	Pass	AV	5.2308G	108.38	Inf	-Inf	3	Horizontal	17	2.09
5230MHz	Pass	PK	5.148G	69.01	74.00	-4.99	3	Horizontal	17	2.09

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5230MHz	Pass	PK	5.2312G	120.30	Inf	-Inf	3	Horizontal	17	2.09
5230MHz	Pass	PK	10.45244G	56.88	68.20	-11.32	3	Vertical	221	1.50
5230MHz	Pass	PK	10.466G	59.26	68.20	-8.94	3	Horizontal	103	2.22
5270MHz	Pass	AV	5.2688G	105.85	Inf	-Inf	3	Vertical	21	1.96
5270MHz	Pass	AV	5.35G	50.89	54.00	-3.11	3	Vertical	21	1.96
5270MHz	Pass	PK	5.266G	117.10	Inf	-Inf	3	Vertical	21	1.96
5270MHz	Pass	PK	5.35G	65.36	74.00	-8.64	3	Vertical	21	1.96
5270MHz	Pass	AV	5.2712G	108.15	Inf	-Inf	3	Horizontal	16	1.95
5270MHz	Pass	AV	5.3532G	53.31	54.00	-0.69	3	Horizontal	16	1.95
5270MHz	Pass	PK	5.2708G	119.99	Inf	-Inf	3	Horizontal	16	1.95
5270MHz	Pass	PK	5.3548G	68.44	74.00	-5.56	3	Horizontal	16	1.95
5270MHz	Pass	PK	10.53178G	56.50	68.20	-11.70	3	Vertical	221	1.47
5270MHz	Pass	PK	10.52782G	57.30	68.20	-10.90	3	Horizontal	102	2.35
5310MHz	Pass	AV	5.308G	103.44	Inf	-Inf	3	Vertical	16	1.90
5310MHz	Pass	AV	5.35G	52.18	54.00	-1.82	3	Vertical	16	1.90
5310MHz	Pass	PK	5.3084G	115.32	Inf	-Inf	3	Vertical	16	1.90
5310MHz	Pass	PK	5.356G	65.96	74.00	-8.04	3	Vertical	16	1.90
5310MHz	Pass	AV	5.3108G	105.70	Inf	-Inf	3	Horizontal	14	2.02
5310MHz	Pass	AV	5.35G	53.83	54.00	-0.17	3	Horizontal	14	2.02
5310MHz	Pass	PK	5.3084G	116.84	Inf	-Inf	3	Horizontal	14	2.02
5310MHz	Pass	PK	5.3508G	67.17	74.00	-6.83	3	Horizontal	14	2.02
5310MHz	Pass	AV	10.62588G	43.36	54.00	-10.64	3	Vertical	221	1.50
5310MHz	Pass	PK	10.6155G	56.09	74.00	-17.91	3	Vertical	221	1.50
5310MHz	Pass	AV	10.62198G	43.44	54.00	-10.56	3	Horizontal	286	1.03
5310MHz	Pass	PK	10.62228G	56.54	74.00	-17.46	3	Horizontal	286	1.03
5510MHz	Pass	AV	5.46G	51.25	54.00	-2.75	3	Vertical	11	1.80
5510MHz	Pass	AV	5.5084G	104.30	Inf	-Inf	3	Vertical	11	1.80
5510MHz	Pass	PK	5.46G	65.10	74.00	-8.90	3	Vertical	11	1.80
5510MHz	Pass	PK	5.4656G	65.63	68.20	-2.57	3	Vertical	11	1.80
5510MHz	Pass	PK	5.508G	116.54	Inf	-Inf	3	Vertical	11	1.80
5510MHz	Pass	AV	5.46G	51.01	54.00	-2.99	3	Horizontal	34	1.88
5510MHz	Pass	AV	5.5084G	105.38	Inf	-Inf	3	Horizontal	34	1.88
5510MHz	Pass	PK	5.4596G	62.72	74.00	-11.28	3	Horizontal	34	1.88
5510MHz	Pass	PK	5.4688G	65.98	68.20	-2.22	3	Horizontal	34	1.88
5510MHz	Pass	PK	5.508G	116.92	Inf	-Inf	3	Horizontal	34	1.88
5510MHz	Pass	AV	11.00638G	43.21	54.00	-10.79	3	Vertical	302	1.49
5510MHz	Pass	PK	11.02666G	56.35	74.00	-17.65	3	Vertical	302	1.49
5510MHz	Pass	AV	11.00626G	43.34	54.00	-10.66	3	Horizontal	214	1.23
5510MHz	Pass	PK	11.01088G	56.46	74.00	-17.54	3	Horizontal	214	1.23
5550MHz	Pass	AV	5.46G	50.52	54.00	-3.48	3	Vertical	13	1.81
5550MHz	Pass	AV	5.5492G	106.63	Inf	-Inf	3	Vertical	13	1.81
5550MHz	Pass	PK	5.4596G	63.07	74.00	-10.93	3	Vertical	13	1.81
5550MHz	Pass	PK	5.468G	67.58	68.20	-0.62	3	Vertical	13	1.81
5550MHz	Pass	PK	5.5488G	118.37	Inf	-Inf	3	Vertical	13	1.81
5550MHz	Pass	AV	5.46G	49.52	54.00	-4.48	3	Horizontal	35	2.10
5550MHz	Pass	AV	5.5488G	107.12	Inf	-Inf	3	Horizontal	35	2.10
5550MHz	Pass	PK	5.4596G	61.71	74.00	-12.29	3	Horizontal	35	2.10
5550MHz	Pass	PK	5.4672G	67.22	68.20	-0.98	3	Horizontal	35	2.10
5550MHz	Pass	PK	5.5472G	118.28	Inf	-Inf	3	Horizontal	35	2.10
5550MHz	Pass	AV	11.1069G	42.64	54.00	-11.36	3	Vertical	323	1.50
5550MHz	Pass	PK	11.10432G	55.74	74.00	-18.26	3	Vertical	323	1.50
5550MHz	Pass	AV	11.1084G	42.63	54.00	-11.37	3	Horizontal	19	1.50
5550MHz	Pass	PK	11.10678G	55.49	74.00	-18.51	3	Horizontal	19	1.50
5670MHz	Pass	AV	5.6688G	105.29	Inf	-Inf	3	Vertical	9	2.02
5670MHz	Pass	PK	5.6682G	115.90	Inf	-Inf	3	Vertical	9	2.02
5670MHz	Pass	PK	5.7288G	66.33	68.20	-1.87	3	Vertical	9	2.02
5670MHz	Pass	AV	5.6688G	105.90	Inf	-Inf	3	Horizontal	344	1.00
5670MHz	Pass	PK	5.6694G	116.81	Inf	-Inf	3	Horizontal	344	1.00
5670MHz	Pass	PK	5.7258G	65.12	68.20	-3.08	3	Horizontal	344	1.00
5670MHz	Pass	AV	11.34708G	42.78	54.00	-11.22	3	Vertical	106	1.50
5670MHz	Pass	PK	11.34858G	56.50	74.00	-17.50	3	Vertical	106	1.50
5670MHz	Pass	AV	11.34432G	42.82	54.00	-11.18	3	Horizontal	122	2.15

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5670MHz	Pass	PK	11.34624G	55.41	74.00	-18.59	3	Horizontal	122	2.15
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.46G	48.21	54.00	-5.79	3	Vertical	12	2.08
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.7112G	107.41	Inf	-Inf	3	Vertical	12	2.08
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.4184G	60.65	74.00	-13.35	3	Vertical	12	2.08
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.4688G	60.08	68.20	-8.12	3	Vertical	12	2.08
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.7112G	118.79	Inf	-Inf	3	Vertical	12	2.08
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.8504G	64.20	68.20	-4.00	3	Vertical	12	2.08
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.46G	48.13	54.00	-5.87	3	Horizontal	348	1.81
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.7088G	107.25	Inf	-Inf	3	Horizontal	348	1.81
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.4556G	60.36	74.00	-13.64	3	Horizontal	348	1.81
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.4664G	62.77	68.20	-5.43	3	Horizontal	348	1.81
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.7088G	117.51	Inf	-Inf	3	Horizontal	348	1.81
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.854G	64.14	68.20	-4.06	3	Horizontal	348	1.81
5710MHz Straddle 5.47-5.725GHz	Pass	AV	11.42708G	43.40	54.00	-10.60	3	Vertical	285	1.78
5710MHz Straddle 5.47-5.725GHz	Pass	PK	11.42396G	56.46	74.00	-17.54	3	Vertical	285	1.78
5710MHz Straddle 5.47-5.725GHz	Pass	AV	11.4341G	43.44	54.00	-10.56	3	Horizontal	294	2.79
5710MHz Straddle 5.47-5.725GHz	Pass	PK	11.43338G	56.50	74.00	-17.50	3	Horizontal	294	2.79
5755MHz	Pass	AV	5.455G	47.77	54.00	-6.23	3	Vertical	10	1.97
5755MHz	Pass	AV	5.7562G	106.47	Inf	-Inf	3	Vertical	10	1.97
5755MHz	Pass	PK	5.641G	67.06	68.20	-1.14	3	Vertical	10	1.97
5755MHz	Pass	PK	5.7538G	117.34	Inf	-Inf	3	Vertical	10	1.97
5755MHz	Pass	PK	5.9338G	61.89	68.20	-6.31	3	Vertical	10	1.97
5755MHz	Pass	AV	5.455G	47.77	54.00	-6.23	3	Horizontal	31	2.07
5755MHz	Pass	AV	5.7538G	107.86	Inf	-Inf	3	Horizontal	31	2.07
5755MHz	Pass	PK	5.6374G	67.65	68.20	-0.55	3	Horizontal	31	2.07
5755MHz	Pass	PK	5.7538G	118.76	Inf	-Inf	3	Horizontal	31	2.07
5755MHz	Pass	PK	5.9302G	61.27	68.20	-6.93	3	Horizontal	31	2.07
5755MHz	Pass	AV	11.51246G	43.20	54.00	-10.80	3	Vertical	222	1.52
5755MHz	Pass	PK	11.50814G	56.69	74.00	-17.31	3	Vertical	222	1.52
5755MHz	Pass	AV	11.50652G	43.18	54.00	-10.82	3	Horizontal	286	1.79
5755MHz	Pass	PK	11.50712G	56.25	74.00	-17.75	3	Horizontal	286	1.79
5795MHz	Pass	AV	5.7962G	106.41	Inf	-Inf	3	Vertical	10	2.06
5795MHz	Pass	PK	5.651G	67.13	68.94	-1.81	3	Vertical	10	2.06
5795MHz	Pass	PK	5.7962G	117.49	Inf	-Inf	3	Vertical	10	2.06
5795MHz	Pass	PK	5.927G	63.86	68.20	-4.34	3	Vertical	10	2.06
5795MHz	Pass	AV	5.7938G	107.87	Inf	-Inf	3	Horizontal	29	2.06
5795MHz	Pass	PK	5.6498G	66.52	68.20	-1.68	3	Horizontal	29	2.06
5795MHz	Pass	PK	5.7938G	119.04	Inf	-Inf	3	Horizontal	29	2.06
5795MHz	Pass	PK	5.927G	65.08	68.20	-3.12	3	Horizontal	29	2.06
5795MHz	Pass	AV	11.58832G	43.28	54.00	-10.72	3	Vertical	219	1.49
5795MHz	Pass	PK	11.57962G	56.16	74.00	-17.84	3	Vertical	219	1.49
5795MHz	Pass	AV	11.5864G	43.01	54.00	-10.99	3	Horizontal	92	1.50
5795MHz	Pass	PK	11.58994G	56.61	74.00	-17.39	3	Horizontal	92	1.50
5835MHz	Pass	AV	5.8338G	105.41	Inf	-Inf	3	Vertical	46	2.07
5835MHz	Pass	AV	5.9286G	54.52	88.20	-33.68	3	Vertical	46	2.07
5835MHz	Pass	PK	5.6394G	64.09	68.20	-4.11	3	Vertical	46	2.07
5835MHz	Pass	PK	5.8362G	116.24	Inf	-Inf	3	Vertical	46	2.07
5835MHz	Pass	PK	5.9346G	68.23	108.20	-39.97	3	Vertical	46	2.07
5835MHz	Pass	AV	5.8338G	107.73	Inf	-Inf	3	Horizontal	26	1.87
5835MHz	Pass	AV	5.9298G	56.65	88.20	-31.55	3	Horizontal	26	1.87
5835MHz	Pass	PK	5.6418G	62.80	68.20	-5.40	3	Horizontal	26	1.87
5835MHz	Pass	PK	5.8338G	120.01	Inf	-Inf	3	Horizontal	26	1.87
5835MHz	Pass	PK	5.925G	72.30	108.20	-35.90	3	Horizontal	26	1.87
5835MHz	Pass	AV	11.67198G	43.48	54.00	-10.52	3	Vertical	222	1.50
5835MHz	Pass	PK	11.68134G	56.43	74.00	-17.57	3	Vertical	222	1.50
5835MHz	Pass	AV	11.67462G	43.84	54.00	-10.16	3	Horizontal	124	1.87
5835MHz	Pass	PK	11.67402G	56.96	74.00	-17.04	3	Horizontal	124	1.87
5875MHz	Pass	AV	5.8762G	106.69	Inf	-Inf	3	Vertical	23	1.06
5875MHz	Pass	AV	5.9218G	73.73	90.55	-16.82	3	Vertical	23	1.06
5875MHz	Pass	PK	5.6458G	63.74	68.20	-4.46	3	Vertical	23	1.06
5875MHz	Pass	PK	5.8762G	117.46	Inf	-Inf	3	Vertical	23	1.06
5875MHz	Pass	PK	5.923G	86.08	109.67	-23.59	3	Vertical	23	1.06




Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5875MHz	Pass	AV	5.8738G	108.99	Inf	-Inf	3	Horizontal	299	1.00
5875MHz	Pass	AV	5.9314G	73.74	88.20	-14.46	3	Horizontal	299	1.00
5875MHz	Pass	PK	5.6518G	66.74	69.53	-2.79	3	Horizontal	299	1.00
5875MHz	Pass	PK	5.8738G	120.51	Inf	-Inf	3	Horizontal	299	1.00
5875MHz	Pass	PK	5.929G	86.89	108.20	-21.31	3	Horizontal	299	1.00
5875MHz	Pass	AV	11.75414G	44.01	54.00	-9.99	3	Vertical	223	1.36
5875MHz	Pass	PK	11.75264G	56.92	74.00	-17.08	3	Vertical	223	1.36
5875MHz	Pass	AV	11.75582G	45.22	54.00	-8.78	3	Horizontal	125	1.77
5875MHz	Pass	PK	11.75678G	57.75	74.00	-16.25	3	Horizontal	125	1.77
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	AV	5.15G	53.39	54.00	-0.61	3	Vertical	0	1.86
5210MHz	Pass	AV	5.214G	99.14	Inf	-Inf	3	Vertical	0	1.86
5210MHz	Pass	AV	5.445G	48.61	54.00	-5.39	3	Vertical	0	1.86
5210MHz	Pass	PK	5.148G	66.31	74.00	-7.69	3	Vertical	0	1.86
5210MHz	Pass	PK	5.215G	110.37	Inf	-Inf	3	Vertical	0	1.86
5210MHz	Pass	PK	5.371G	61.21	74.00	-12.79	3	Vertical	0	1.86
5210MHz	Pass	AV	5.15G	53.45	54.00	-0.55	3	Horizontal	18	2.02
5210MHz	Pass	AV	5.211G	100.24	Inf	-Inf	3	Horizontal	18	2.02
5210MHz	Pass	AV	5.449G	48.58	54.00	-5.42	3	Horizontal	18	2.02
5210MHz	Pass	PK	5.15G	65.05	74.00	-8.95	3	Horizontal	18	2.02
5210MHz	Pass	PK	5.211G	111.15	Inf	-Inf	3	Horizontal	18	2.02
5210MHz	Pass	PK	5.409G	62.24	74.00	-11.76	3	Horizontal	18	2.02
5210MHz	Pass	PK	10.43368G	56.35	68.20	-11.85	3	Vertical	222	1.50
5210MHz	Pass	PK	10.42678G	57.19	68.20	-11.01	3	Horizontal	114	1.14
5290MHz	Pass	AV	5.04G	47.79	54.00	-6.21	3	Vertical	11	1.84
5290MHz	Pass	AV	5.284G	100.83	Inf	-Inf	3	Vertical	11	1.84
5290MHz	Pass	AV	5.35G	53.02	54.00	-0.98	3	Vertical	11	1.84
5290MHz	Pass	PK	5.146G	60.65	74.00	-13.35	3	Vertical	11	1.84
5290MHz	Pass	PK	5.285G	112.05	Inf	-Inf	3	Vertical	11	1.84
5290MHz	Pass	PK	5.362G	65.43	74.00	-8.57	3	Vertical	11	1.84
5290MHz	Pass	PK	5.485G	61.02	68.20	-7.18	3	Vertical	11	1.84
5290MHz	Pass	AV	5.149G	48.26	54.00	-5.74	3	Horizontal	13	2.04
5290MHz	Pass	AV	5.291G	102.30	Inf	-Inf	3	Horizontal	13	2.04
5290MHz	Pass	AV	5.35G	53.72	54.00	-0.28	3	Horizontal	13	2.04
5290MHz	Pass	PK	5.128G	60.00	74.00	-14.00	3	Horizontal	13	2.04
5290MHz	Pass	PK	5.289G	112.84	Inf	-Inf	3	Horizontal	13	2.04
5290MHz	Pass	PK	5.35G	65.45	74.00	-8.55	3	Horizontal	13	2.04
5290MHz	Pass	PK	5.497G	61.30	68.20	-6.90	3	Horizontal	13	2.04
5290MHz	Pass	PK	10.57448G	56.06	68.20	-12.14	3	Vertical	221	1.49
5290MHz	Pass	PK	10.59362G	56.81	68.20	-11.39	3	Horizontal	120	1.00
5530MHz	Pass	AV	5.35G	48.48	54.00	-5.52	3	Vertical	8	1.78
5530MHz	Pass	AV	5.46G	53.44	54.00	-0.56	3	Vertical	8	1.78
5530MHz	Pass	AV	5.527G	100.72	Inf	-Inf	3	Vertical	8	1.78
5530MHz	Pass	PK	5.313G	61.11	68.20	-7.09	3	Vertical	8	1.78
5530MHz	Pass	PK	5.46G	64.74	74.00	-9.26	3	Vertical	8	1.78
5530MHz	Pass	PK	5.463G	65.90	68.20	-2.30	3	Vertical	8	1.78
5530MHz	Pass	PK	5.527G	112.39	Inf	-Inf	3	Vertical	8	1.78
5530MHz	Pass	PK	5.756G	61.03	68.20	-7.17	3	Vertical	8	1.78
5530MHz	Pass	AV	5.35G	47.13	54.00	-6.87	3	Horizontal	348	1.99
5530MHz	Pass	AV	5.46G	51.91	54.00	-2.09	3	Horizontal	348	1.99
5530MHz	Pass	AV	5.529G	101.47	Inf	-Inf	3	Horizontal	348	1.99
5530MHz	Pass	PK	5.295G	59.89	68.20	-8.31	3	Horizontal	348	1.99
5530MHz	Pass	PK	5.448G	63.62	74.00	-10.38	3	Horizontal	348	1.99
5530MHz	Pass	PK	5.467G	65.24	68.20	-2.96	3	Horizontal	348	1.99
5530MHz	Pass	PK	5.529G	113.12	Inf	-Inf	3	Horizontal	348	1.99
5530MHz	Pass	PK	5.778G	59.81	68.20	-8.39	3	Horizontal	348	1.99
5530MHz	Pass	AV	11.06312G	42.85	54.00	-11.15	3	Vertical	203	1.50
5530MHz	Pass	PK	11.06222G	55.82	74.00	-18.18	3	Vertical	203	1.50
5530MHz	Pass	AV	11.06138G	42.93	54.00	-11.07	3	Horizontal	193	1.79
5530MHz	Pass	PK	11.05268G	55.97	74.00	-18.03	3	Horizontal	193	1.79
5610MHz	Pass	AV	5.446G	51.18	54.00	-2.82	3	Vertical	11	1.84
5610MHz	Pass	AV	5.609G	102.30	Inf	-Inf	3	Vertical	11	1.84

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5610MHz	Pass	PK	5.445G	65.51	74.00	-8.49	3	Vertical	11	1.84
5610MHz	Pass	PK	5.465G	64.63	68.20	-3.57	3	Vertical	11	1.84
5610MHz	Pass	PK	5.607G	114.40	Inf	-Inf	3	Vertical	11	1.84
5610MHz	Pass	PK	5.734G	62.25	68.20	-5.95	3	Vertical	11	1.84
5610MHz	Pass	AV	5.45G	50.98	54.00	-3.02	3	Horizontal	350	2.05
5610MHz	Pass	AV	5.609G	102.18	Inf	-Inf	3	Horizontal	350	2.05
5610MHz	Pass	PK	5.451G	63.18	74.00	-10.82	3	Horizontal	350	2.05
5610MHz	Pass	PK	5.469G	64.70	68.20	-3.50	3	Horizontal	350	2.05
5610MHz	Pass	PK	5.608G	113.56	Inf	-Inf	3	Horizontal	350	2.05
5610MHz	Pass	PK	5.729G	62.54	68.20	-5.66	3	Horizontal	350	2.05
5610MHz	Pass	AV	11.21898G	42.95	54.00	-11.05	3	Vertical	358	2.61
5610MHz	Pass	PK	11.20926G	55.72	74.00	-18.28	3	Vertical	358	2.61
5610MHz	Pass	AV	11.21742G	42.97	54.00	-11.03	3	Horizontal	116	1.50
5610MHz	Pass	PK	11.208G	56.79	74.00	-17.21	3	Horizontal	116	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.4452G	51.14	54.00	-2.86	3	Vertical	9	1.89
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.6888G	103.31	Inf	-Inf	3	Vertical	9	1.89
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.438G	62.92	74.00	-11.08	3	Vertical	9	1.89
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.4644G	63.53	68.20	-4.67	3	Vertical	9	1.89
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.6876G	114.05	Inf	-Inf	3	Vertical	9	1.89
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.8508G	65.16	68.20	-3.04	3	Vertical	9	1.89
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.4596G	51.80	54.00	-2.20	3	Horizontal	30	1.02
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.6888G	104.75	Inf	-Inf	3	Horizontal	30	1.02
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.4452G	64.39	74.00	-9.61	3	Horizontal	30	1.02
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.4656G	66.40	68.20	-1.80	3	Horizontal	30	1.02
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.6852G	115.94	Inf	-Inf	3	Horizontal	30	1.02
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.8508G	65.96	68.20	-2.24	3	Horizontal	30	1.02
5690MHz Straddle 5.47-5.725GHz	Pass	AV	11.39224G	43.19	54.00	-10.81	3	Vertical	107	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	11.38834G	55.89	74.00	-18.11	3	Vertical	107	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	AV	11.39032G	43.40	54.00	-10.60	3	Horizontal	218	2.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	11.38942G	56.43	74.00	-17.57	3	Horizontal	218	2.50
5775MHz	Pass	AV	5.7738G	101.04	Inf	-Inf	3	Vertical	39	1.92
5775MHz	Pass	PK	5.6382G	65.81	68.20	-2.39	3	Vertical	39	1.92
5775MHz	Pass	PK	5.7738G	113.57	Inf	-Inf	3	Vertical	39	1.92
5775MHz	Pass	PK	5.9358G	61.61	68.20	-6.59	3	Vertical	39	1.92
5775MHz	Pass	AV	5.7702G	102.80	Inf	-Inf	3	Horizontal	24	1.89
5775MHz	Pass	PK	5.6382G	64.03	68.20	-4.17	3	Horizontal	24	1.89
5775MHz	Pass	PK	5.7702G	115.91	Inf	-Inf	3	Horizontal	24	1.89
5775MHz	Pass	PK	5.9286G	60.25	68.20	-7.95	3	Horizontal	24	1.89
5775MHz	Pass	AV	11.5485G	43.10	54.00	-10.90	3	Vertical	13	1.00
5775MHz	Pass	PK	11.55534G	56.12	74.00	-17.88	3	Vertical	13	1.00
5775MHz	Pass	AV	11.54358G	43.19	54.00	-10.81	3	Horizontal	0	1.18
5775MHz	Pass	PK	11.56452G	56.10	74.00	-17.90	3	Horizontal	0	1.18
5855MHz	Pass	AV	5.8562G	101.81	Inf	-Inf	3	Vertical	29	1.00
5855MHz	Pass	AV	5.9246G	64.03	88.49	-24.46	3	Vertical	29	1.00
5855MHz	Pass	PK	5.6102G	64.11	68.20	-4.09	3	Vertical	29	1.00
5855MHz	Pass	PK	5.8574G	113.29	Inf	-Inf	3	Vertical	29	1.00
5855MHz	Pass	PK	5.9342G	75.85	108.20	-32.35	3	Vertical	29	1.00
5855MHz	Pass	AV	5.8526G	104.59	Inf	-Inf	3	Horizontal	25	1.99
5855MHz	Pass	AV	5.9306G	64.82	88.20	-23.38	3	Horizontal	25	1.99
5855MHz	Pass	PK	5.6486G	65.42	68.20	-2.78	3	Horizontal	25	1.99
5855MHz	Pass	PK	5.8514G	116.17	Inf	-Inf	3	Horizontal	25	1.99
5855MHz	Pass	PK	5.9282G	77.19	108.20	-31.01	3	Horizontal	25	1.99
5855MHz	Pass	AV	11.69836G	43.16	54.00	-10.84	3	Vertical	0	1.50
5855MHz	Pass	PK	11.69836G	56.26	74.00	-17.74	3	Vertical	0	1.50
5855MHz	Pass	AV	11.70958G	43.16	54.00	-10.84	3	Horizontal	183	1.50
5855MHz	Pass	PK	11.71588G	55.98	74.00	-18.02	3	Horizontal	183	1.50
802.11be EHT 160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.136G	53.18	54.00	-0.82	3	Vertical	9	2.05
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.2596G	94.89	Inf	-Inf	3	Vertical	9	2.05
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.3832G	50.98	54.00	-3.02	3	Vertical	9	2.05
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.15G	66.10	74.00	-7.90	3	Vertical	9	2.05
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.2584G	106.75	Inf	-Inf	3	Vertical	9	2.05

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.3556G	68.65	74.00	-5.35	3	Vertical	9	2.05
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.5236G	61.00	68.20	-7.20	3	Vertical	9	2.05
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.1348G	52.71	54.00	-1.29	3	Horizontal	26	2.17
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.256G	95.39	Inf	-Inf	3	Horizontal	26	2.17
5250MHz Straddle 5.15-5.25GHz	Pass	AV	5.3976G	50.37	54.00	-3.63	3	Horizontal	26	2.17
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.1204G	66.53	74.00	-7.47	3	Horizontal	26	2.17
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.2548G	106.90	Inf	-Inf	3	Horizontal	26	2.17
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.3532G	62.49	74.00	-11.51	3	Horizontal	26	2.17
5250MHz Straddle 5.15-5.25GHz	Pass	PK	5.5308G	60.81	68.20	-7.39	3	Horizontal	26	2.17
5250MHz Straddle 5.15-5.25GHz	Pass	PK	10.4934G	55.81	68.20	-12.39	3	Vertical	207	1.50
5250MHz Straddle 5.15-5.25GHz	Pass	PK	10.48662G	55.70	68.20	-12.50	3	Horizontal	156	1.93
5570MHz	Pass	AV	5.444G	51.34	54.00	-2.66	3	Vertical	13	2.07
5570MHz	Pass	AV	5.5676G	94.70	Inf	-Inf	3	Vertical	13	2.07
5570MHz	Pass	PK	5.3264G	61.56	68.20	-6.64	3	Vertical	13	2.07
5570MHz	Pass	PK	5.4344G	66.73	74.00	-7.27	3	Vertical	13	2.07
5570MHz	Pass	PK	5.4644G	65.81	68.20	-2.39	3	Vertical	13	2.07
5570MHz	Pass	PK	5.5664G	105.53	Inf	-Inf	3	Vertical	13	2.07
5570MHz	Pass	PK	5.732G	62.59	68.20	-5.61	3	Vertical	13	2.07
5570MHz	Pass	AV	5.45G	51.84	54.00	-2.16	3	Horizontal	13	2.03
5570MHz	Pass	AV	5.492G	95.38	Inf	-Inf	3	Horizontal	13	2.03
5570MHz	Pass	PK	5.3312G	63.11	68.20	-5.09	3	Horizontal	13	2.03
5570MHz	Pass	PK	5.4344G	65.59	74.00	-8.41	3	Horizontal	13	2.03
5570MHz	Pass	PK	5.4668G	67.55	68.20	-0.65	3	Horizontal	13	2.03
5570MHz	Pass	PK	5.5736G	105.86	Inf	-Inf	3	Horizontal	13	2.03
5570MHz	Pass	PK	5.7296G	61.68	68.20	-6.52	3	Horizontal	13	2.03
5570MHz	Pass	AV	11.14672G	42.67	54.00	-11.33	3	Vertical	39	1.50
5570MHz	Pass	PK	11.15062G	55.54	74.00	-18.46	3	Vertical	39	1.50
5570MHz	Pass	AV	11.15116G	42.70	54.00	-11.30	3	Horizontal	152	1.50
5570MHz	Pass	PK	11.13496G	55.86	74.00	-18.14	3	Horizontal	152	1.50
5815MHz	Pass	AV	5.446G	49.56	54.00	-4.44	3	Vertical	36	1.89
5815MHz	Pass	AV	5.752G	94.31	Inf	-Inf	3	Vertical	36	1.89
5815MHz	Pass	AV	5.896G	81.32	109.47	-28.15	3	Vertical	36	1.89
5815MHz	Pass	PK	5.608G	66.49	68.20	-1.71	3	Vertical	36	1.89
5815MHz	Pass	PK	5.812G	105.19	Inf	-Inf	3	Vertical	36	1.89
5815MHz	Pass	PK	5.896G	91.29	129.47	-38.18	3	Vertical	36	1.89
5815MHz	Pass	AV	5.422G	49.94	54.00	-4.06	3	Horizontal	24	2.08
5815MHz	Pass	AV	5.749G	96.68	Inf	-Inf	3	Horizontal	24	2.08
5815MHz	Pass	AV	5.896G	83.50	109.47	-25.97	3	Horizontal	24	2.08
5815MHz	Pass	PK	5.65G	65.53	68.20	-2.67	3	Horizontal	24	2.08
5815MHz	Pass	PK	5.812G	108.57	Inf	-Inf	3	Horizontal	24	2.08
5815MHz	Pass	PK	5.896G	92.55	129.47	-36.92	3	Horizontal	24	2.08
5815MHz	Pass	AV	11.63288G	43.25	54.00	-10.75	3	Vertical	328	1.50
5815MHz	Pass	PK	11.62202G	56.79	74.00	-17.21	3	Vertical	328	1.50
5815MHz	Pass	AV	11.63372G	43.17	54.00	-10.83	3	Horizontal	107	1.50
5815MHz	Pass	PK	11.6393G	56.10	74.00	-17.90	3	Horizontal	107	1.50


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

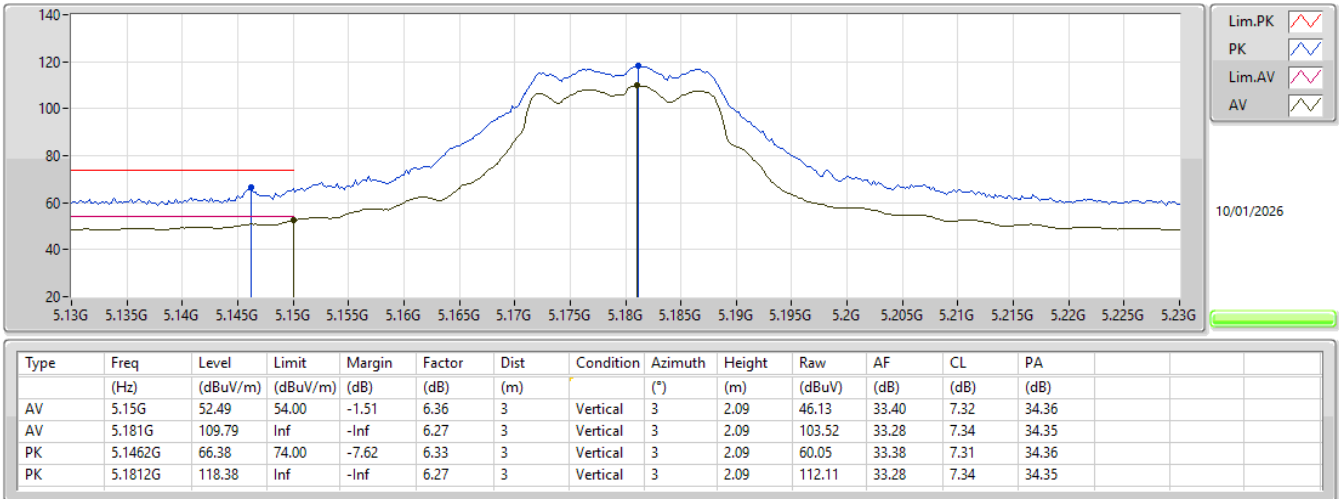


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

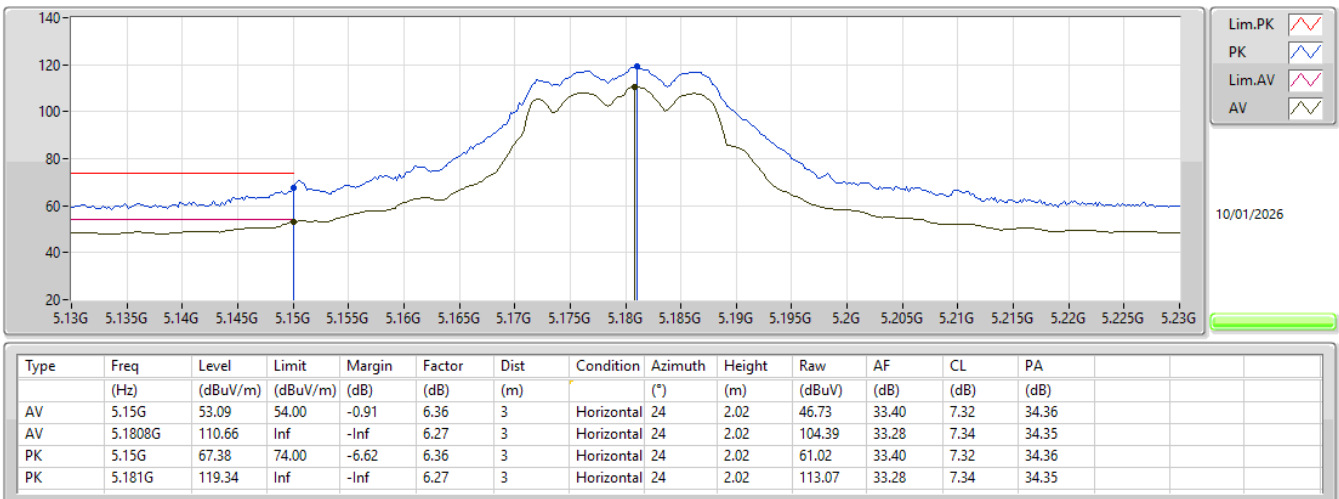


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

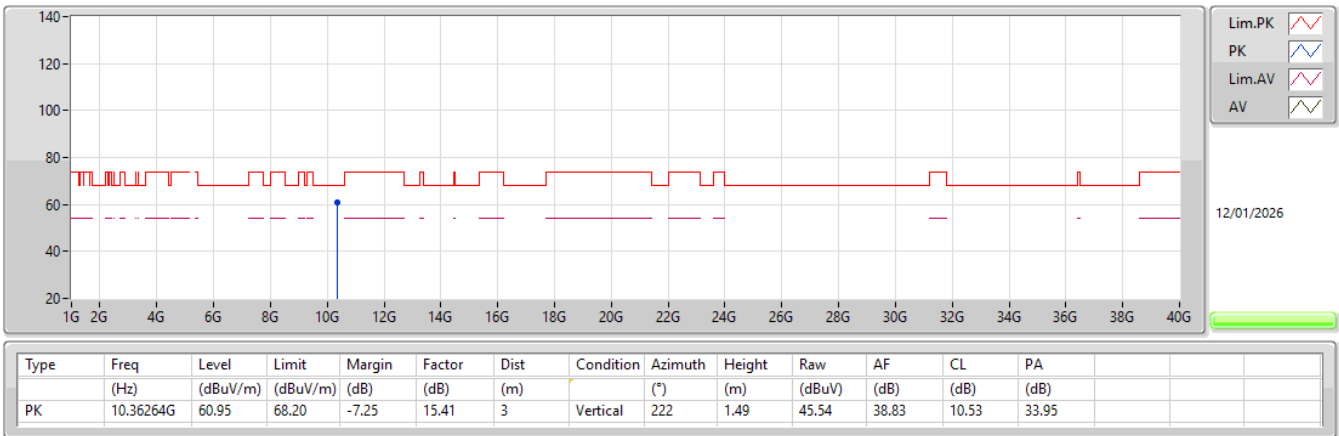


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

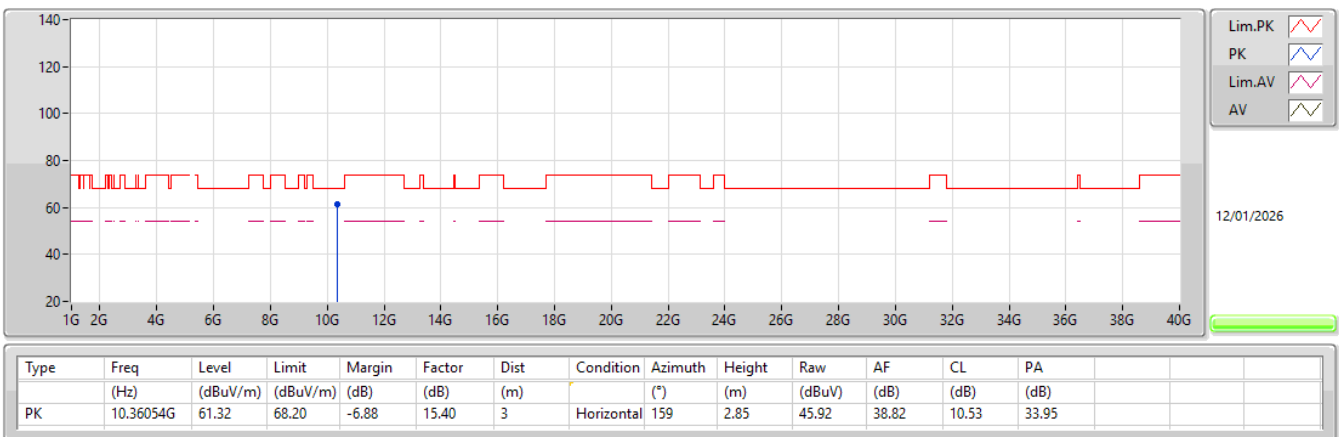


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

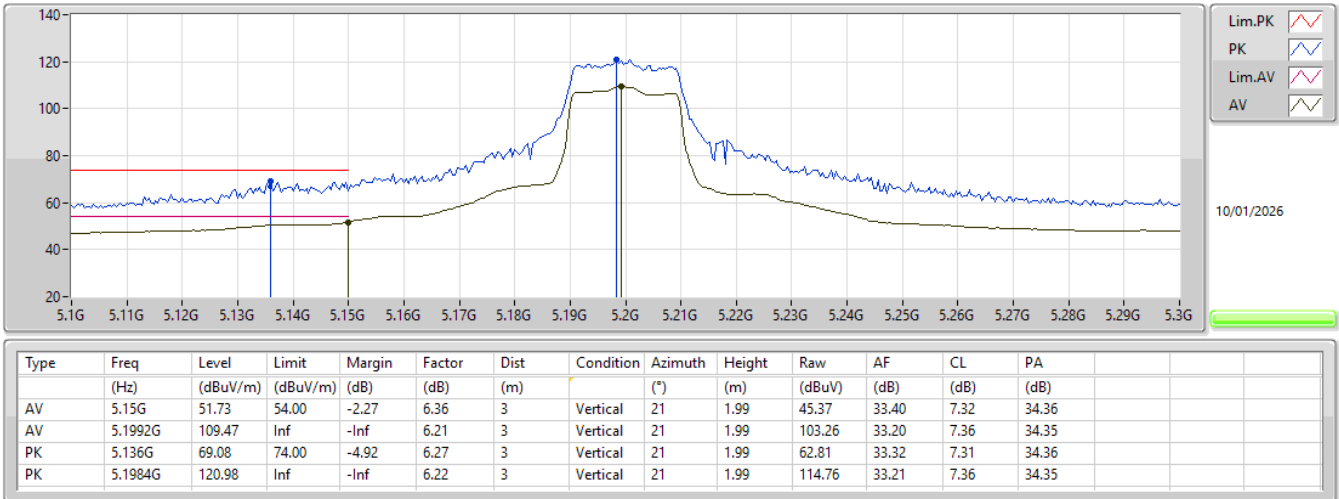


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

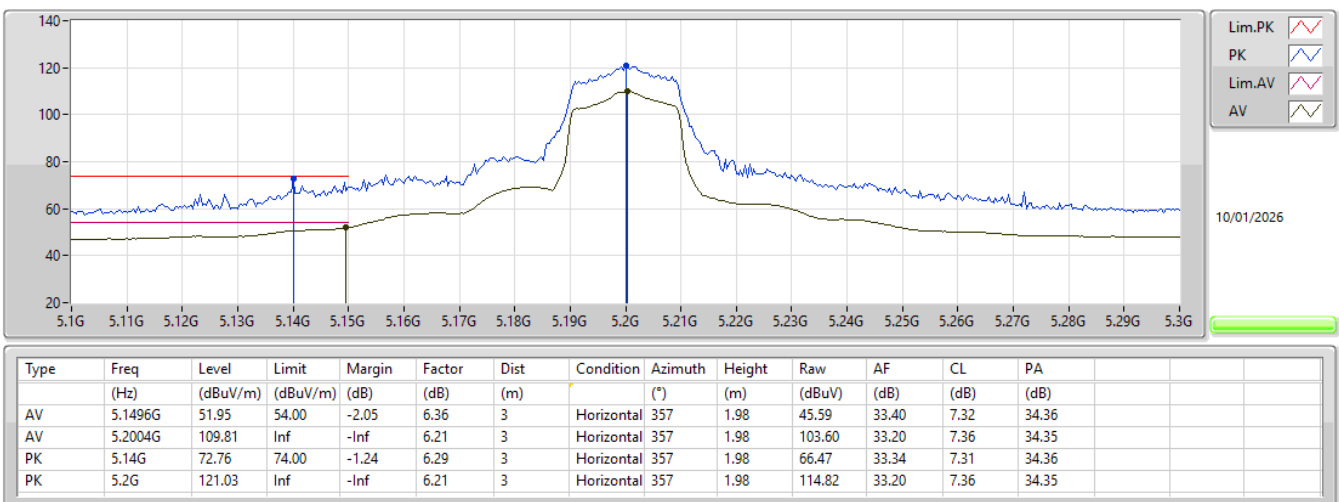


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

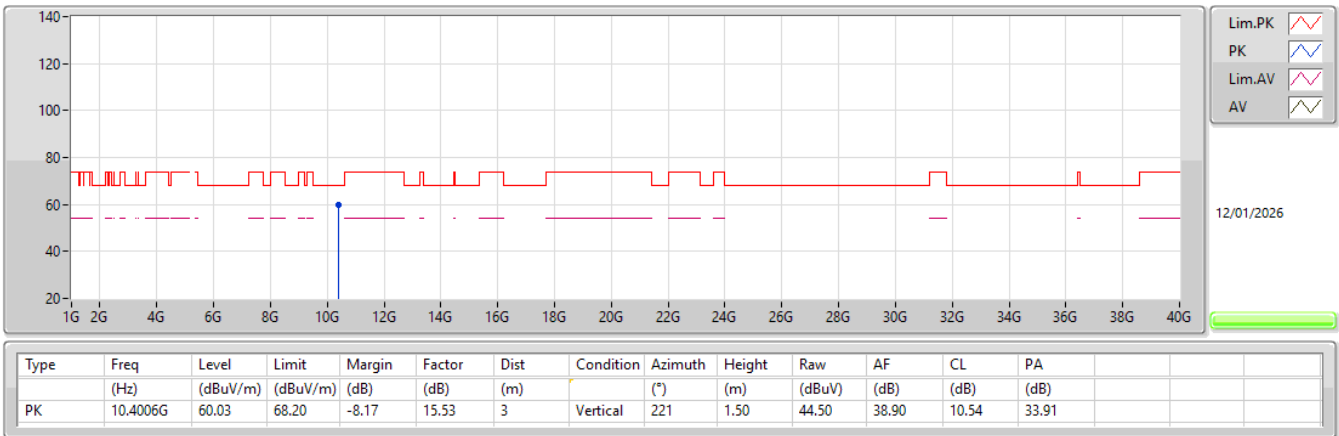


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

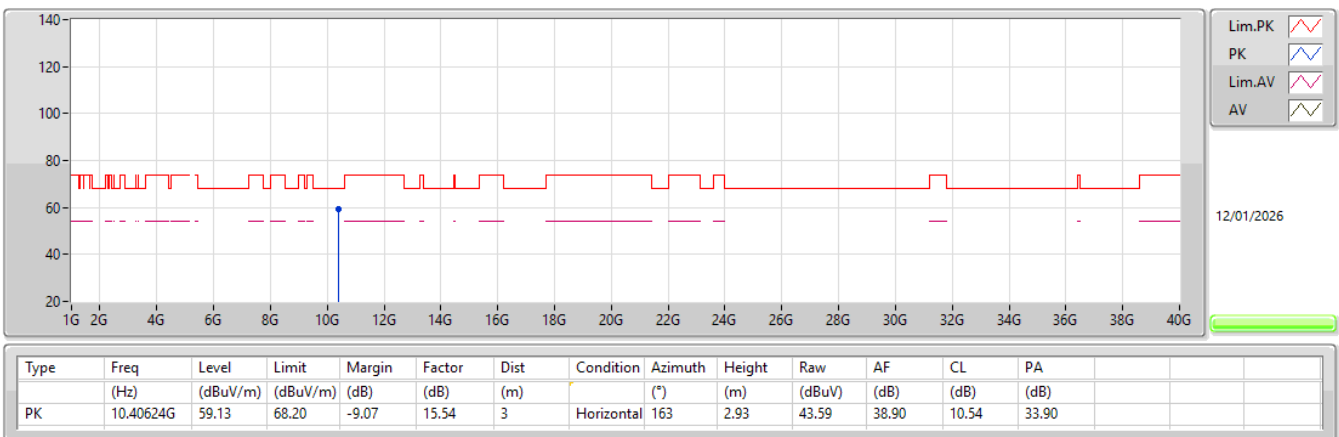


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

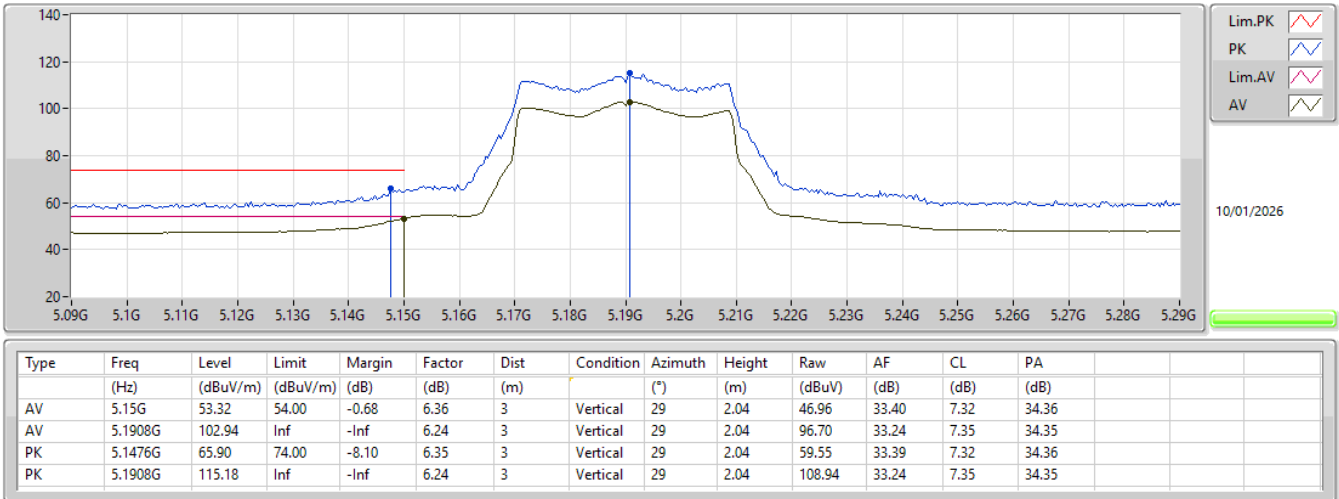


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

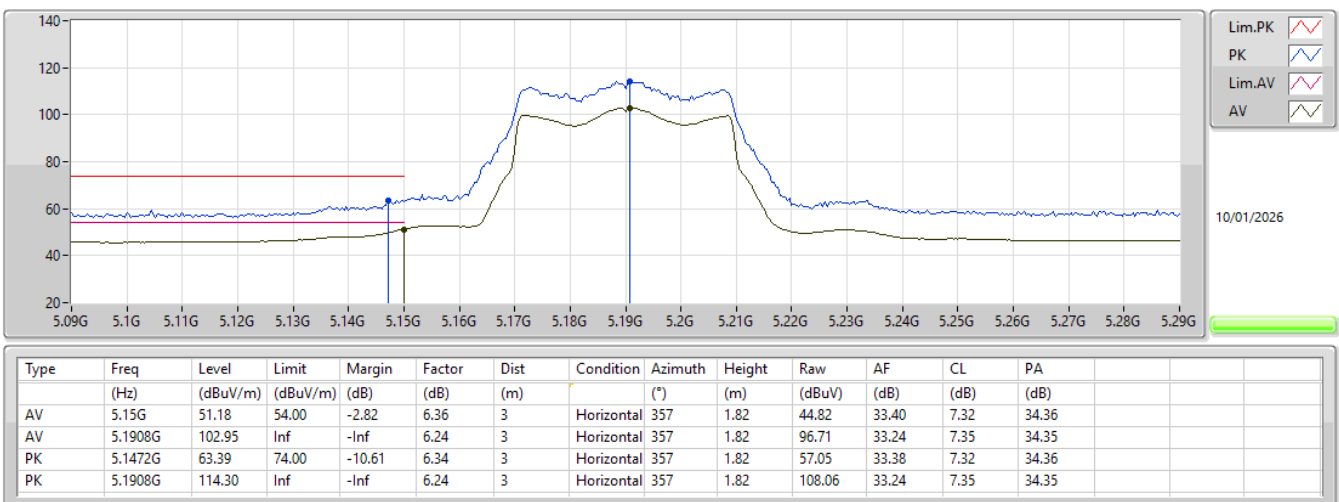


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

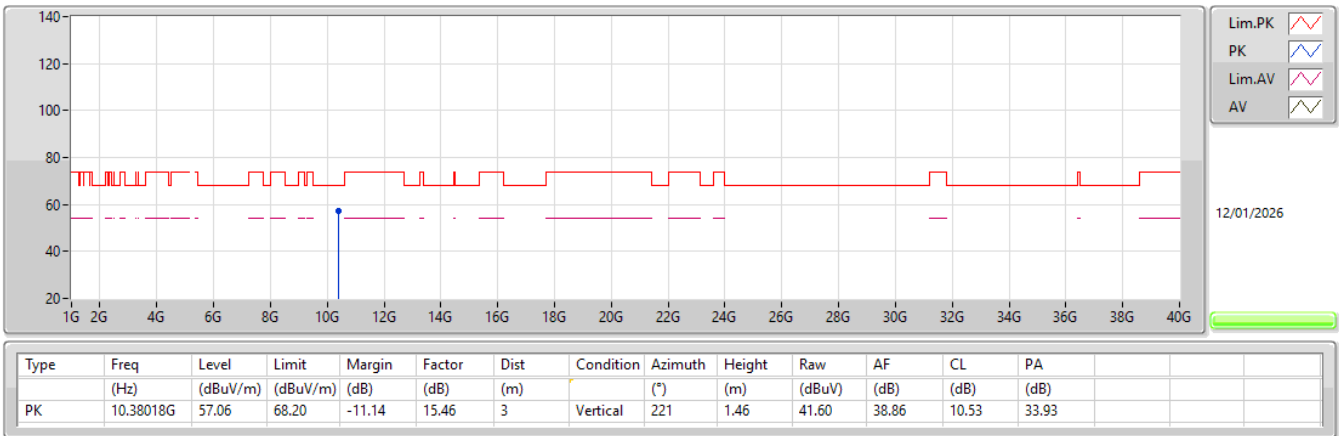


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

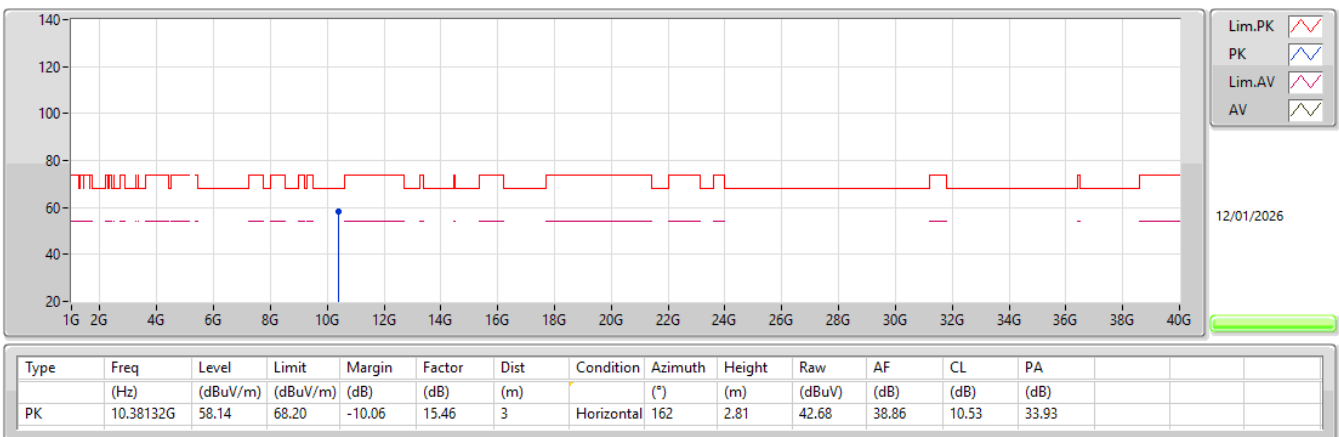

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5210MHz_TX

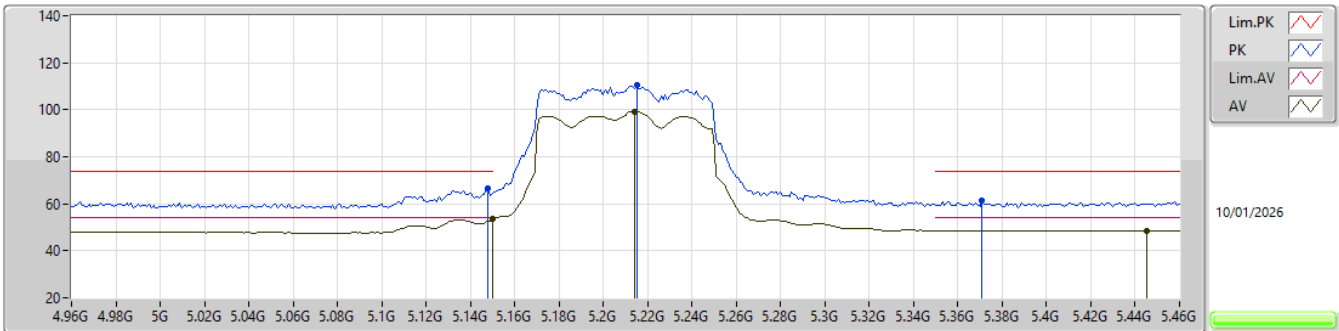

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	53.39	54.00	-0.61	6.36	3	Vertical	0	1.86	47.03	33.40	7.32	34.36
AV	5.214G	99.14	Inf	-Inf	6.17	3	Vertical	0	1.86	92.97	33.14	7.37	34.34
AV	5.445G	48.61	54.00	-5.39	6.22	3	Vertical	0	1.86	42.39	32.99	7.52	34.29
PK	5.148G	66.31	74.00	-7.69	6.35	3	Vertical	0	1.86	59.96	33.39	7.32	34.36
PK	5.215G	110.37	Inf	-Inf	6.17	3	Vertical	0	1.86	104.20	33.14	7.37	34.34
PK	5.371G	61.21	74.00	-12.79	6.13	3	Vertical	0	1.86	55.08	32.96	7.48	34.31

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5210MHz_TX

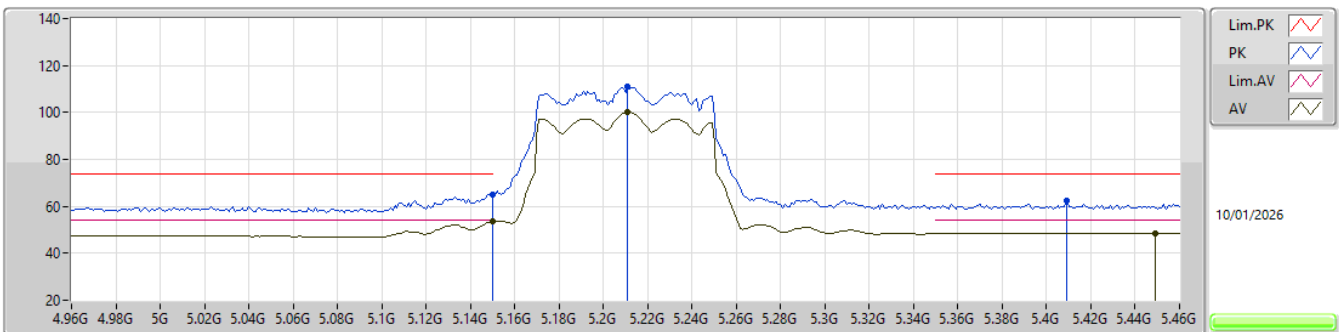

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	53.45	54.00	-0.55	6.36	3	Horizontal	18	2.02	47.09	33.40	7.32	34.36
AV	5.211G	100.24	Inf	-Inf	6.19	3	Horizontal	18	2.02	94.05	33.16	7.37	34.34
AV	5.449G	48.58	54.00	-5.42	6.23	3	Horizontal	18	2.02	42.35	33.00	7.52	34.29
PK	5.15G	65.05	74.00	-8.95	6.36	3	Horizontal	18	2.02	58.69	33.40	7.32	34.36
PK	5.211G	111.15	Inf	-Inf	6.19	3	Horizontal	18	2.02	104.96	33.16	7.37	34.34
PK	5.409G	62.24	74.00	-11.76	6.12	3	Horizontal	18	2.02	56.12	32.92	7.50	34.30


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

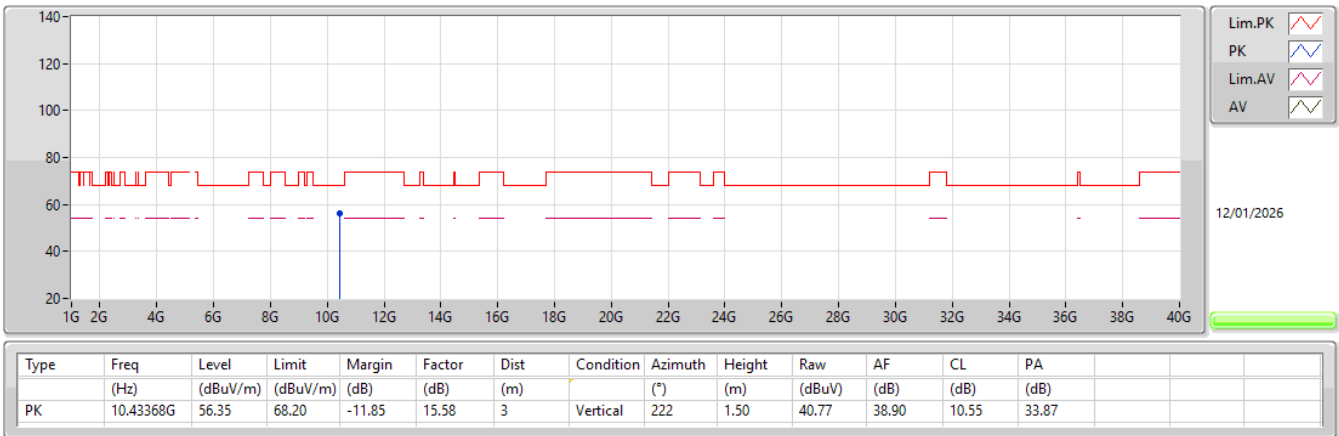


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

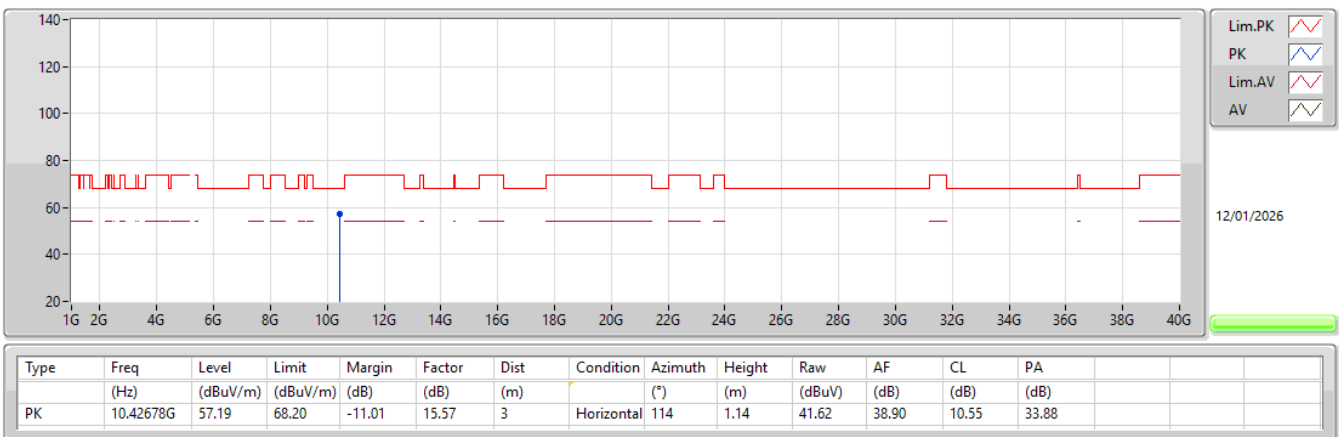


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

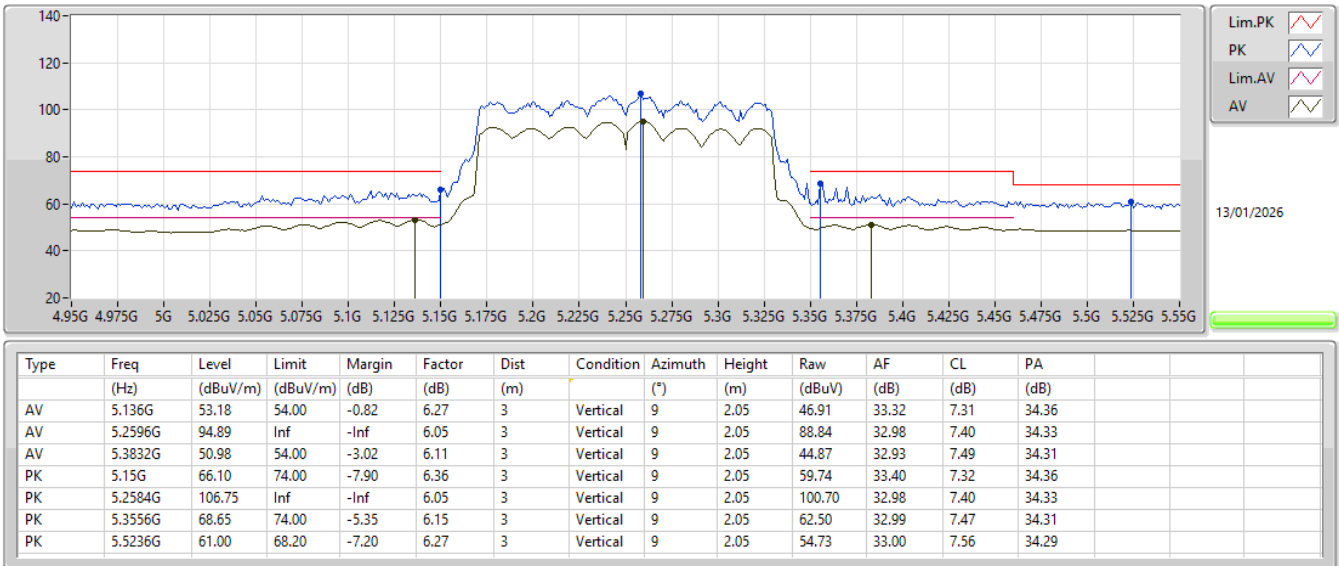


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

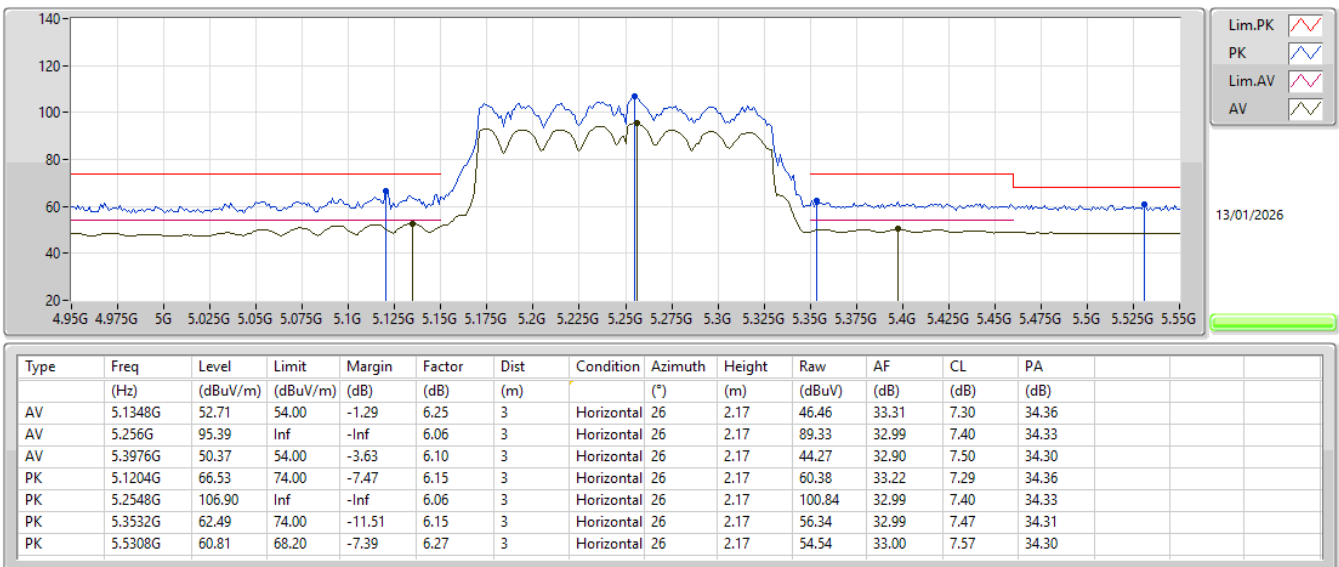


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

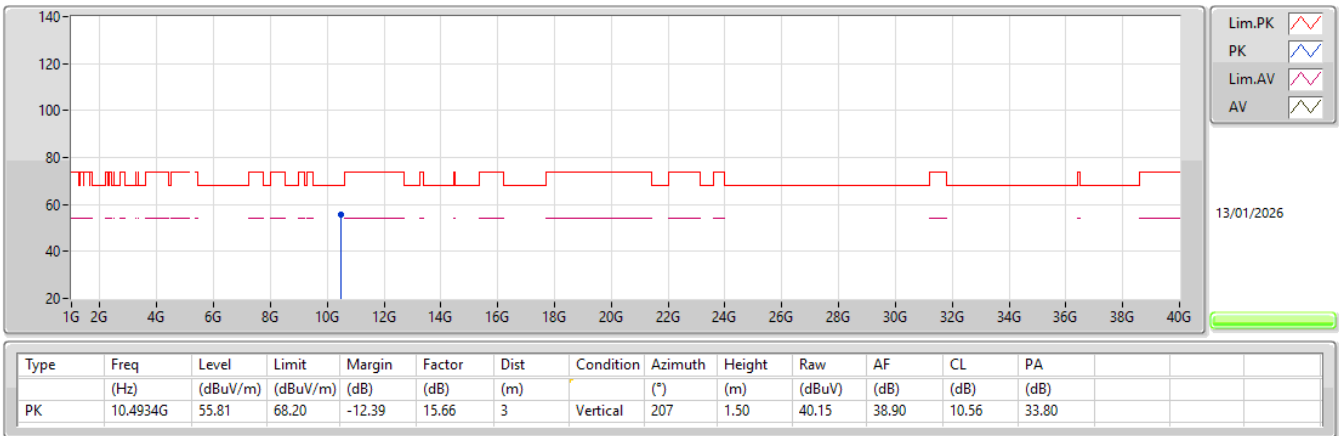


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

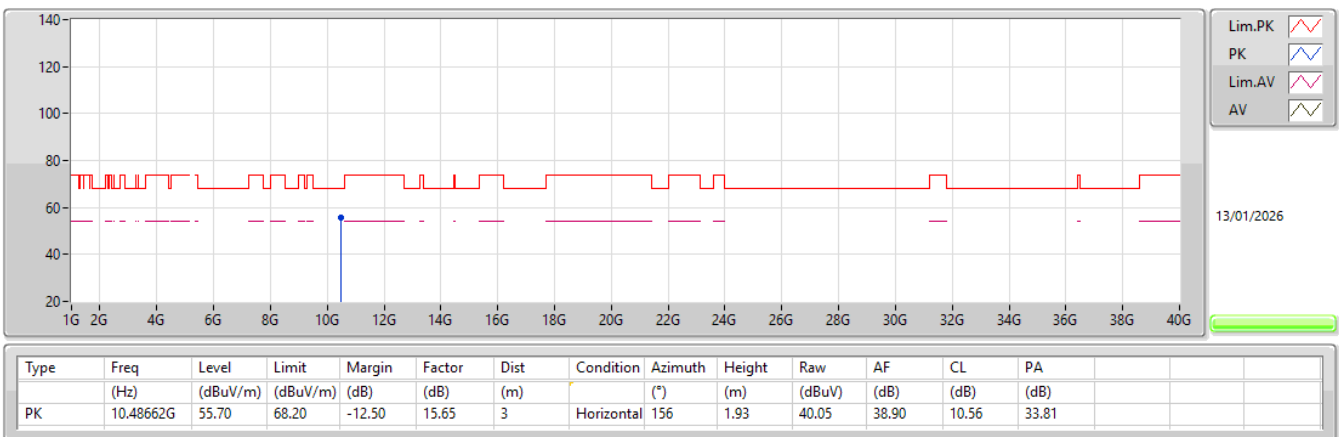


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

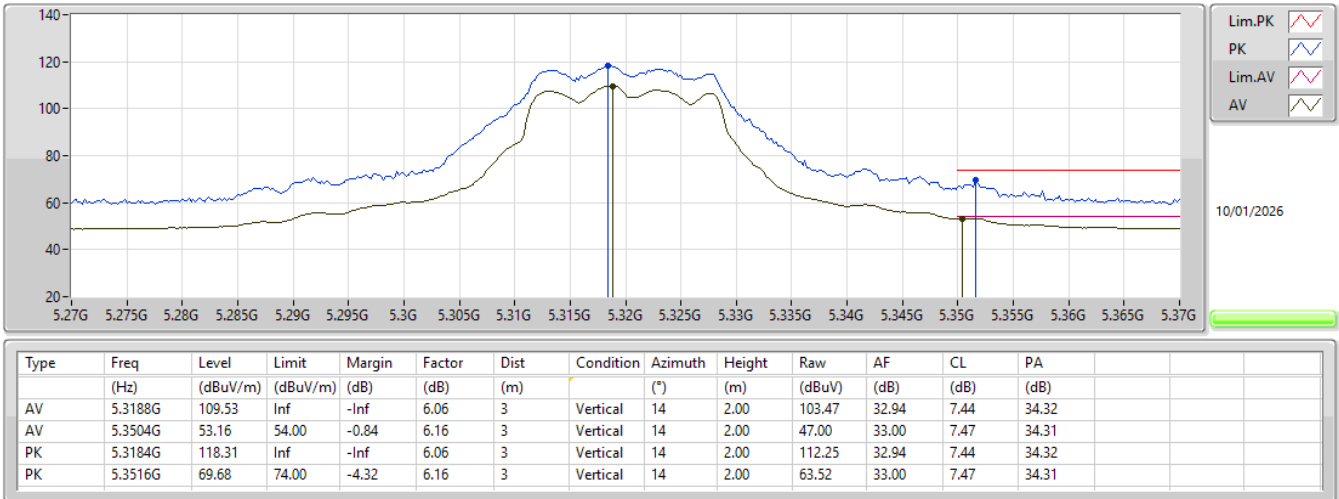


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

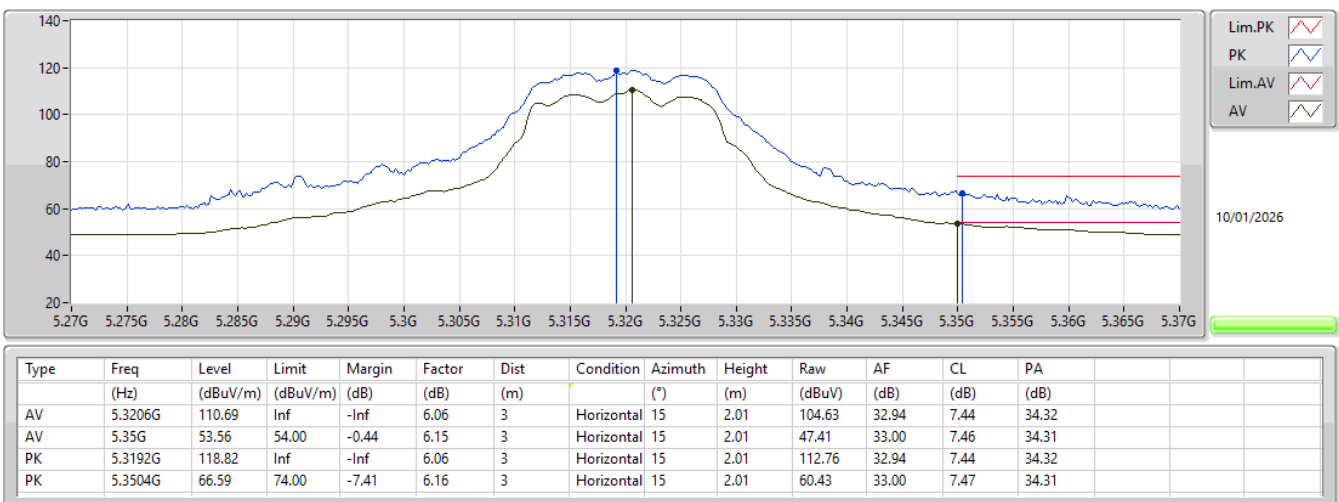


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

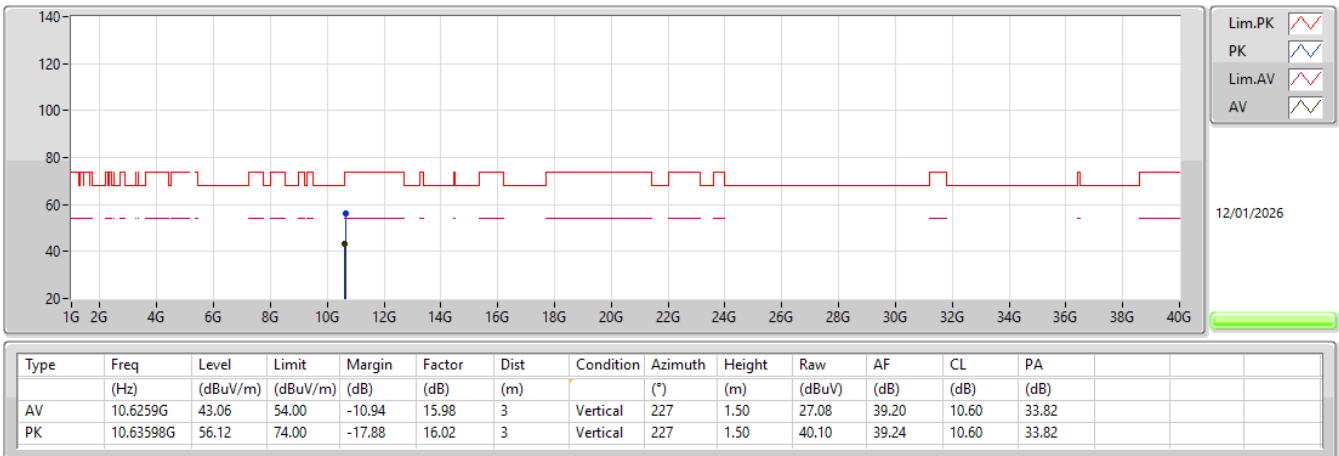


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

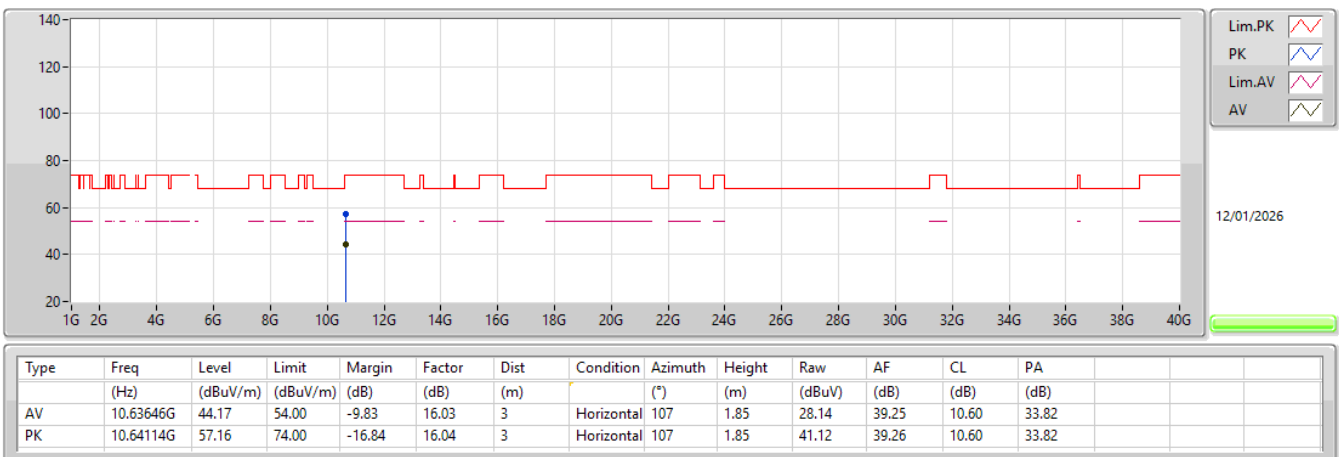


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

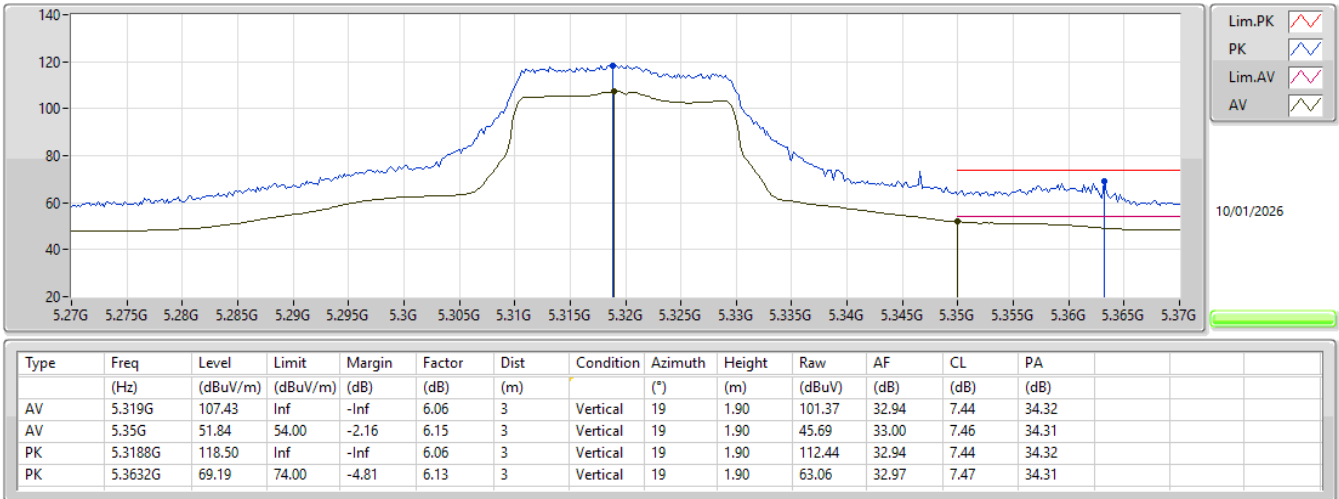


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

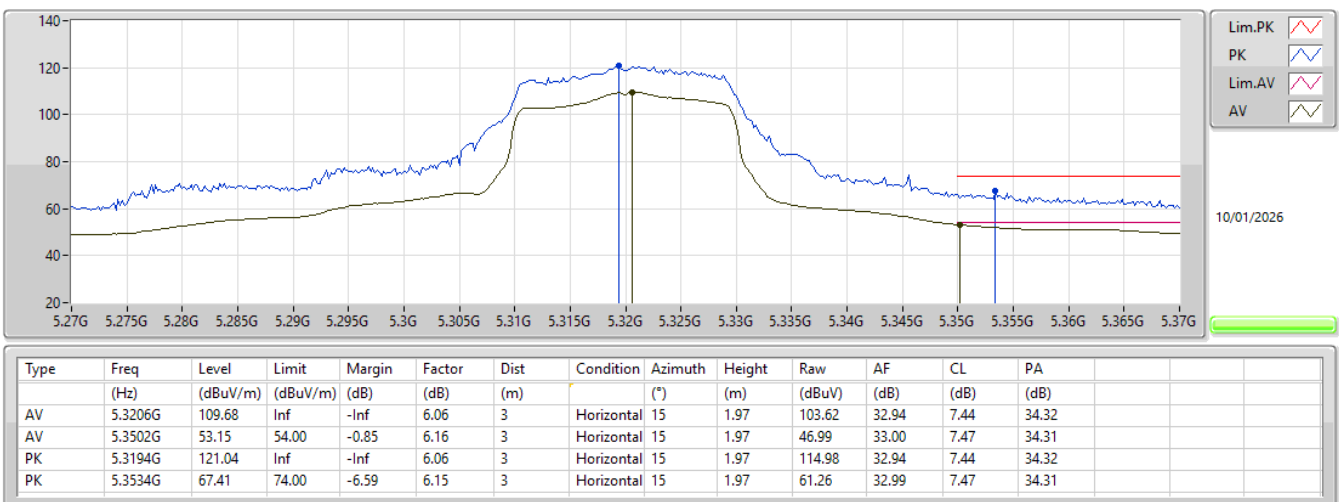


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

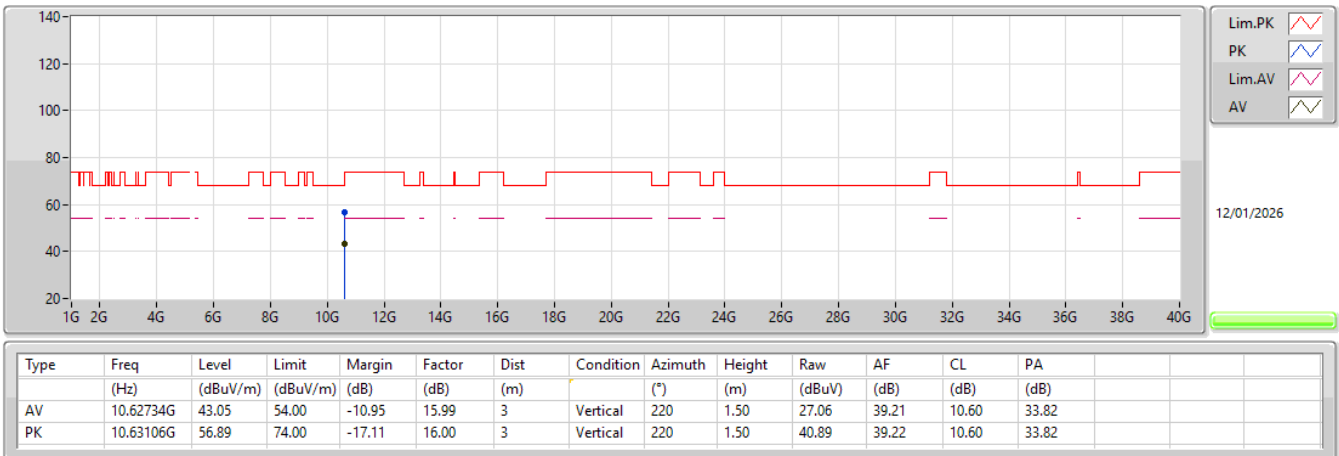


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

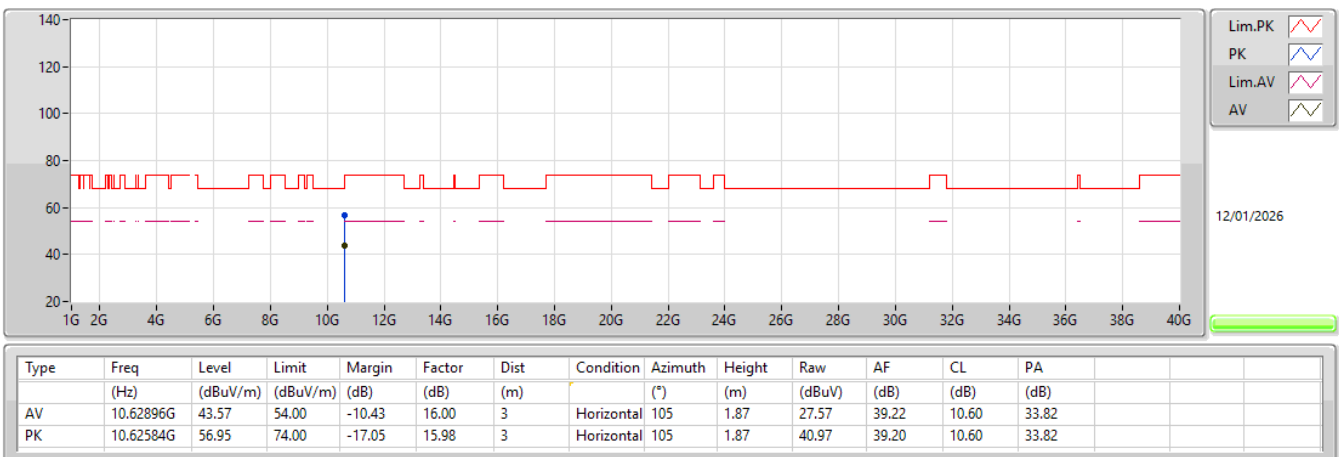


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

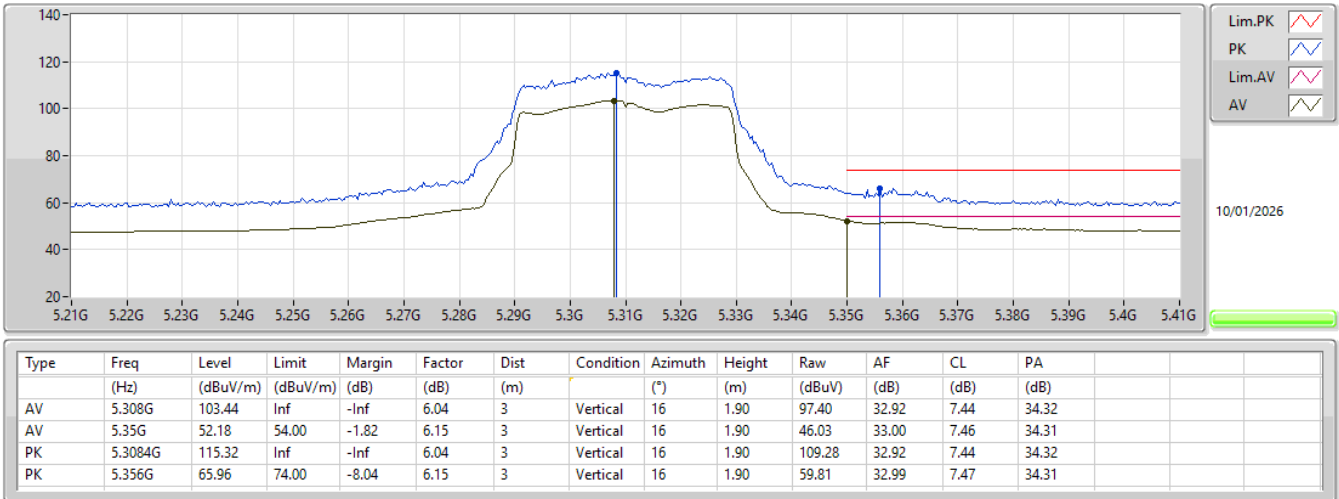


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

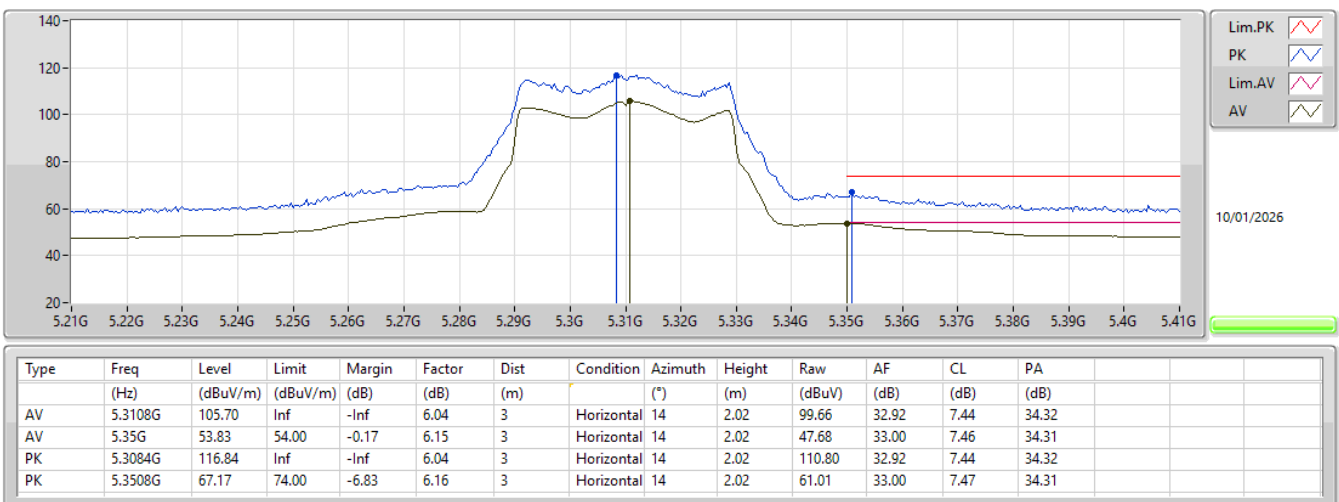


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

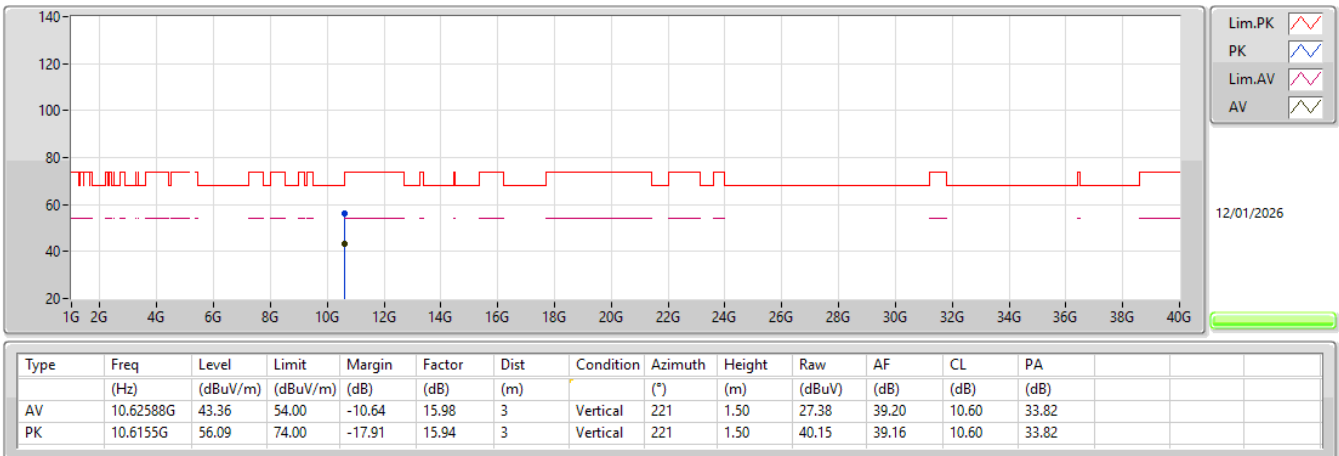


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

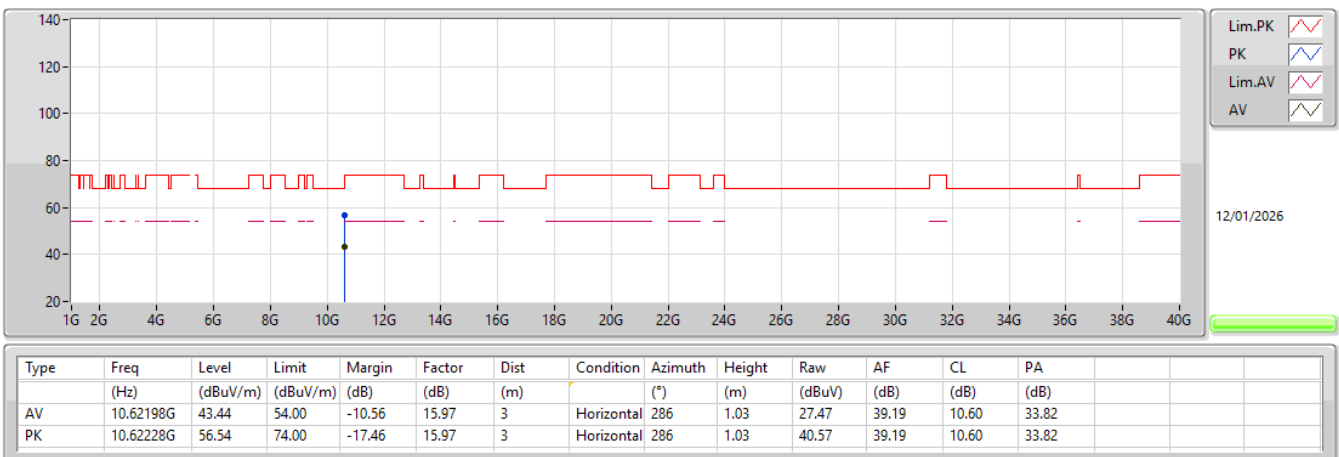


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

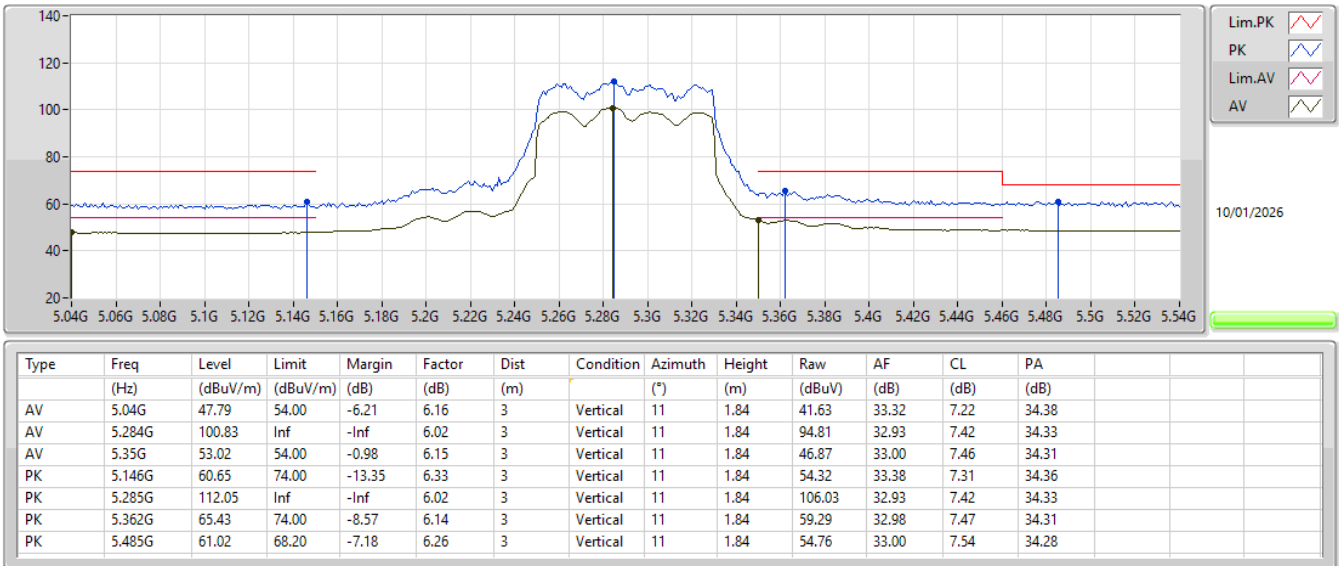


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

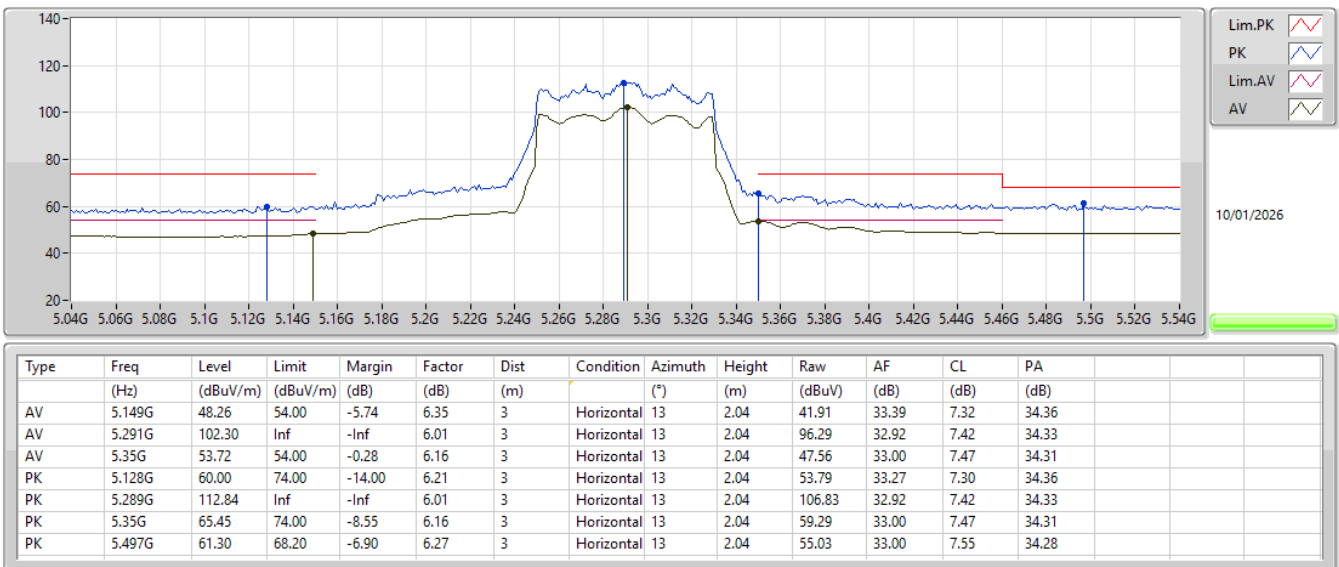


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

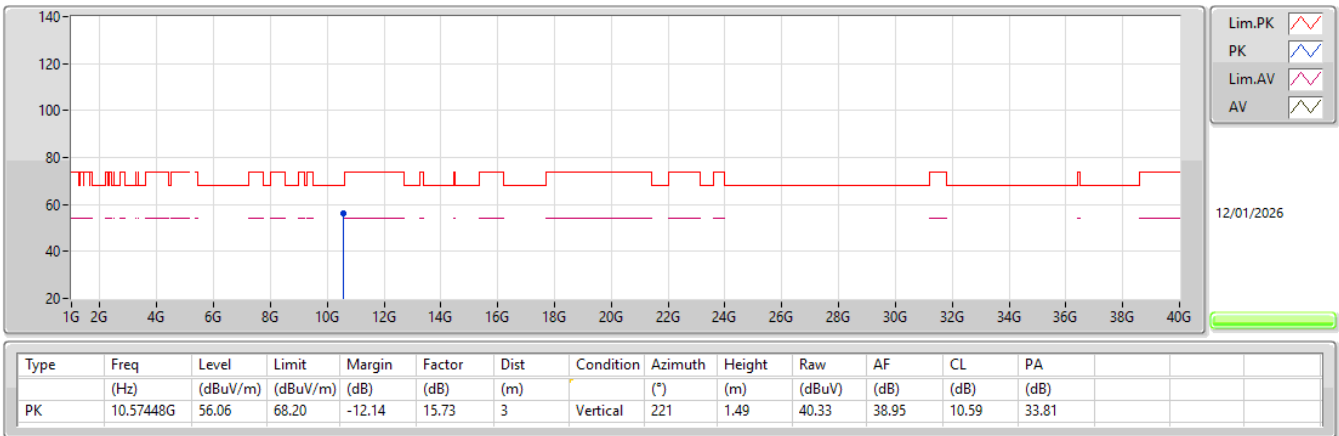


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

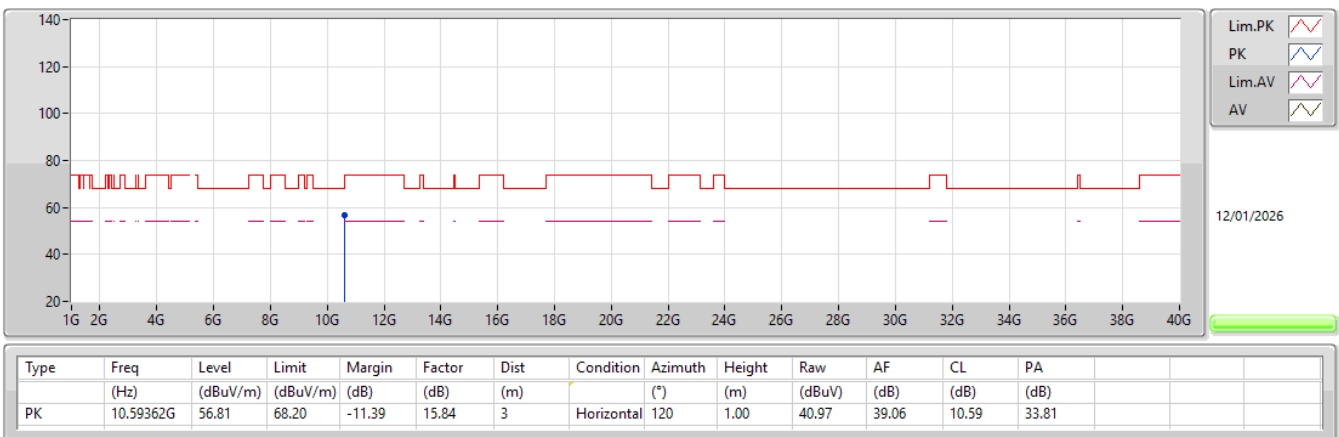

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

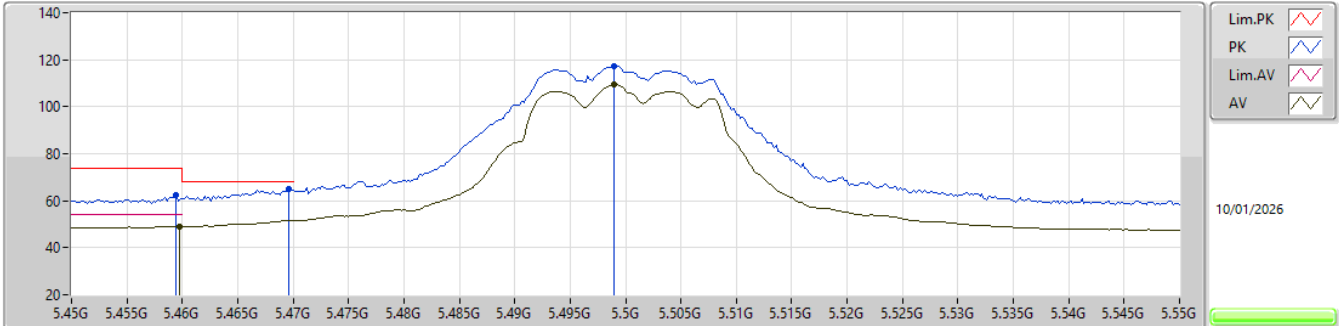

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.4598G	49.14	54.00	-4.86	6.24	3	Vertical	11	1.92	42.90	33.00	7.53	34.29
AV	5.499G	109.25	Inf	-Inf	6.27	3	Vertical	11	1.92	102.98	33.00	7.55	34.28
PK	5.4594G	62.23	74.00	-11.77	6.24	3	Vertical	11	1.92	55.99	33.00	7.53	34.29
PK	5.4696G	64.78	68.20	-3.42	6.24	3	Vertical	11	1.92	58.54	33.00	7.53	34.29
PK	5.499G	117.45	Inf	-Inf	6.27	3	Vertical	11	1.92	111.18	33.00	7.55	34.28

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

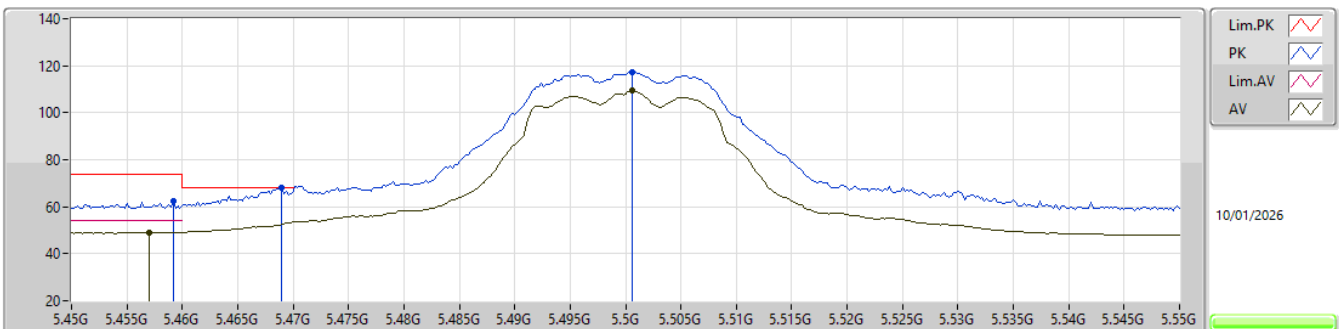

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.457G	49.01	54.00	-4.99	6.24	3	Horizontal	13	1.92	42.77	33.00	7.53	34.29
AV	5.5006G	109.23	Inf	-Inf	6.27	3	Horizontal	13	1.92	102.96	33.00	7.55	34.28
PK	5.4592G	62.27	74.00	-11.73	6.24	3	Horizontal	13	1.92	56.03	33.00	7.53	34.29
PK	5.469G	68.00	68.20	-0.20	6.24	3	Horizontal	13	1.92	61.76	33.00	7.53	34.29
PK	5.5006G	117.36	Inf	-Inf	6.27	3	Horizontal	13	1.92	111.09	33.00	7.55	34.28


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

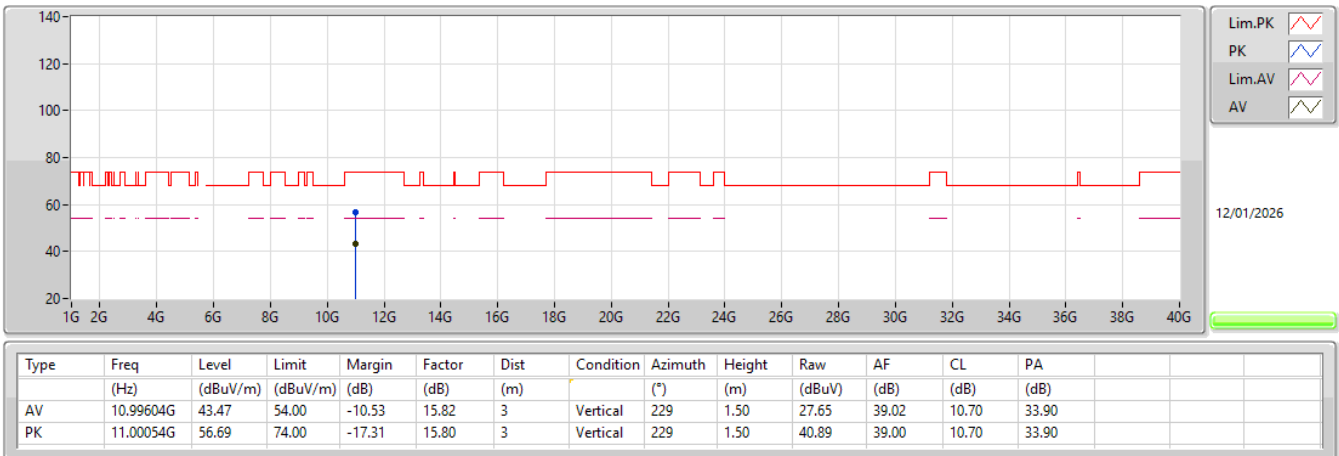


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

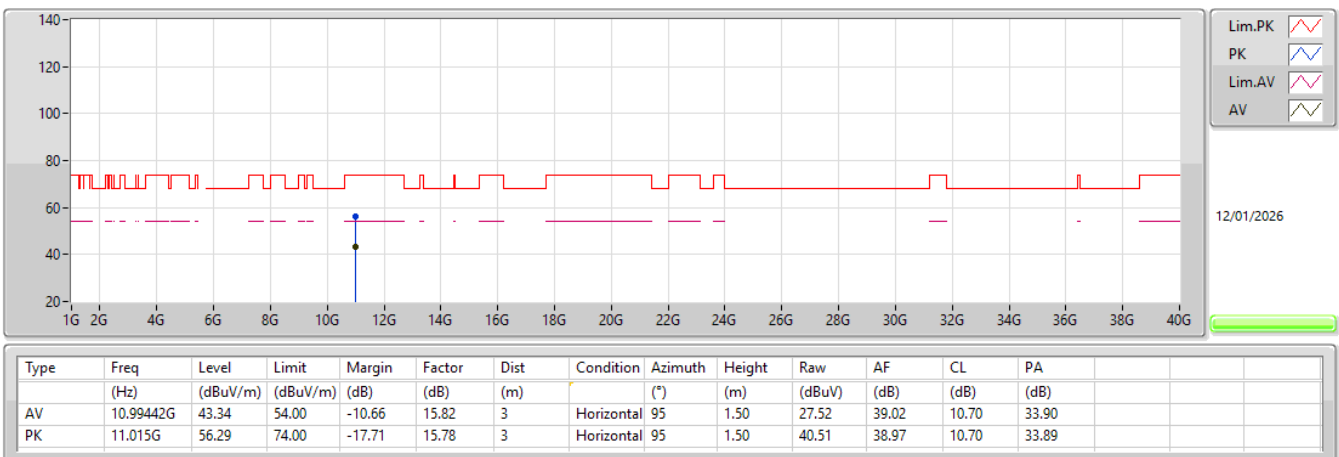


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

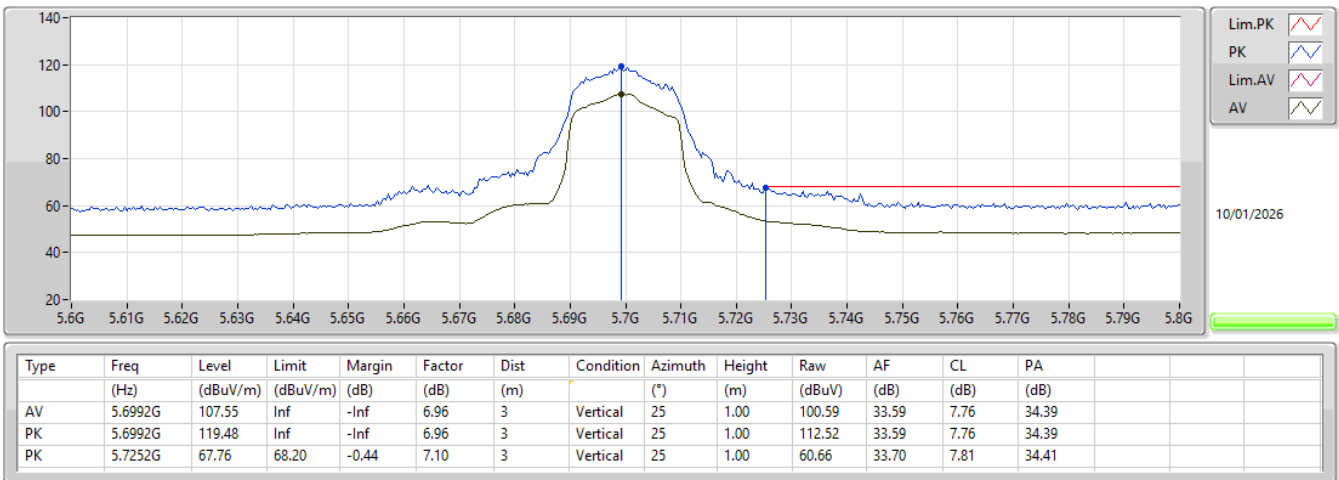


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

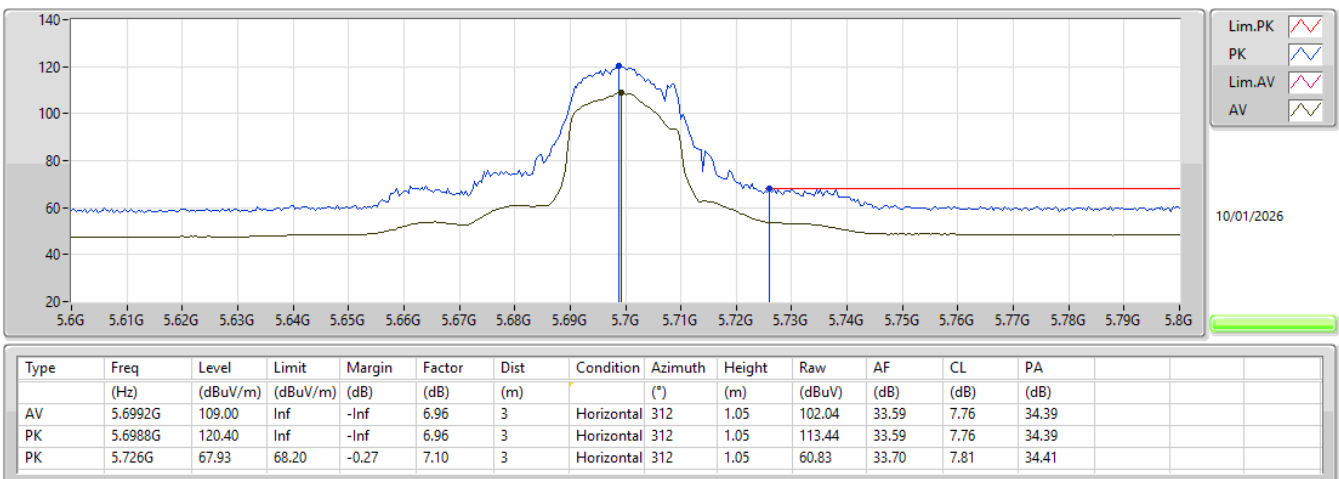


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

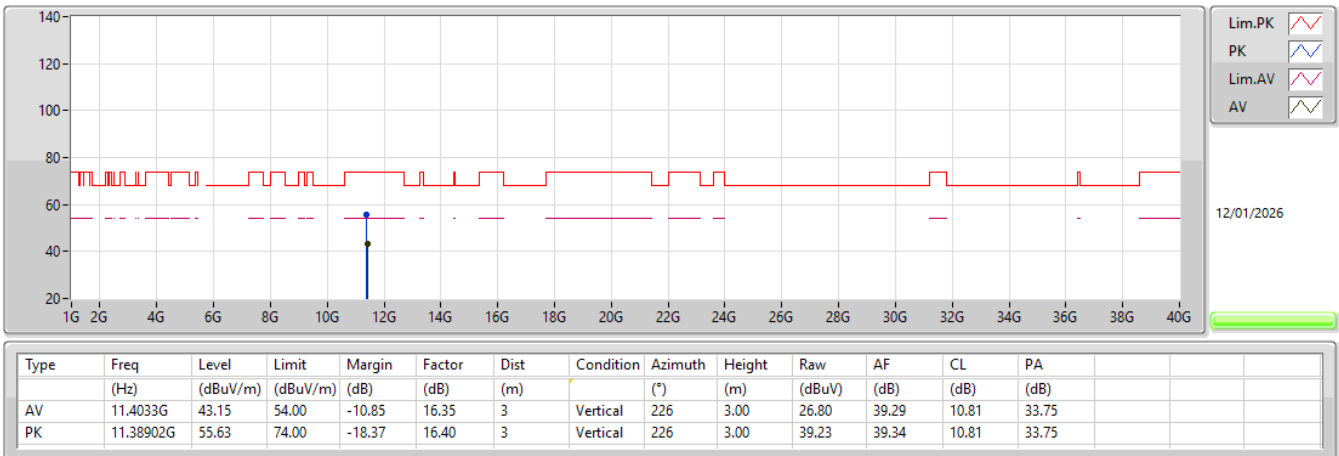


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

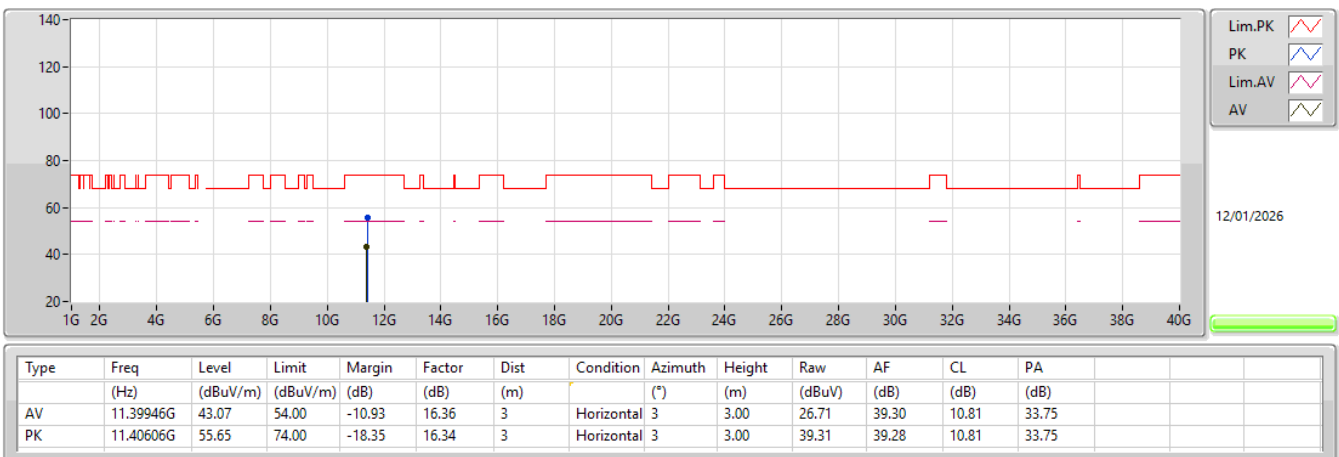

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5550MHz_TX

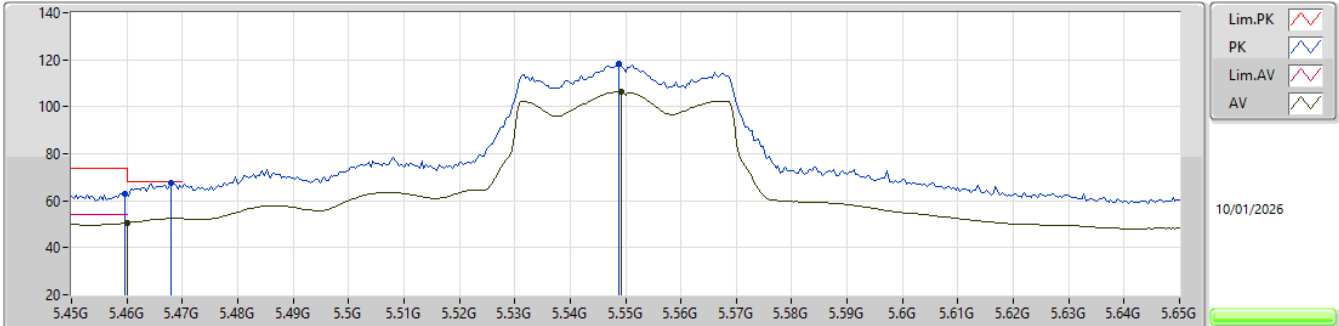

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.46G	50.52	54.00	-3.48	6.24	3	Vertical	13	1.81	44.28	33.00	7.53	34.29
AV	5.5492G	106.63	Inf	-Inf	6.26	3	Vertical	13	1.81	100.37	33.00	7.57	34.31
PK	5.4596G	63.07	74.00	-10.93	6.24	3	Vertical	13	1.81	56.83	33.00	7.53	34.29
PK	5.468G	67.58	68.20	-0.62	6.24	3	Vertical	13	1.81	61.34	33.00	7.53	34.29
PK	5.5488G	118.37	Inf	-Inf	6.26	3	Vertical	13	1.81	112.11	33.00	7.57	34.31

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5550MHz_TX

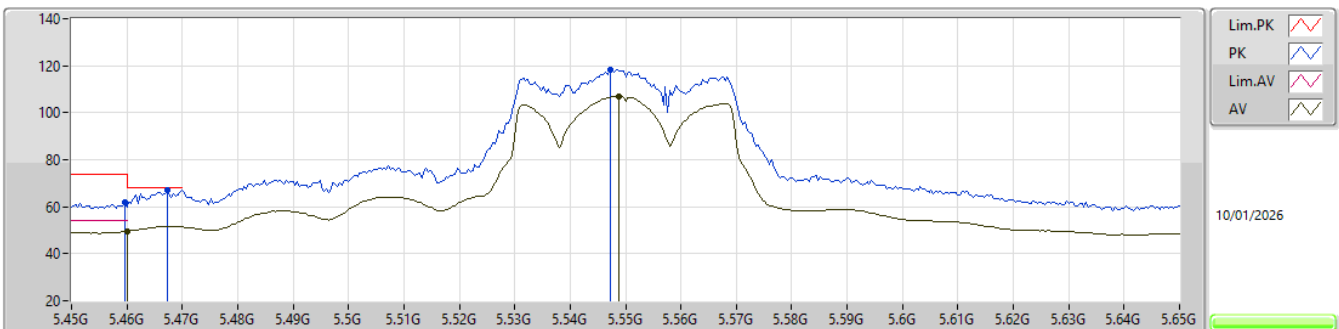

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.46G	49.52	54.00	-4.48	6.24	3	Horizontal	35	2.10	43.28	33.00	7.53	34.29
AV	5.5488G	107.12	Inf	-Inf	6.26	3	Horizontal	35	2.10	100.86	33.00	7.57	34.31
PK	5.4596G	61.71	74.00	-12.29	6.24	3	Horizontal	35	2.10	55.47	33.00	7.53	34.29
PK	5.4672G	67.22	68.20	-0.98	6.24	3	Horizontal	35	2.10	60.98	33.00	7.53	34.29
PK	5.5472G	118.28	Inf	-Inf	6.26	3	Horizontal	35	2.10	112.02	33.00	7.57	34.31


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

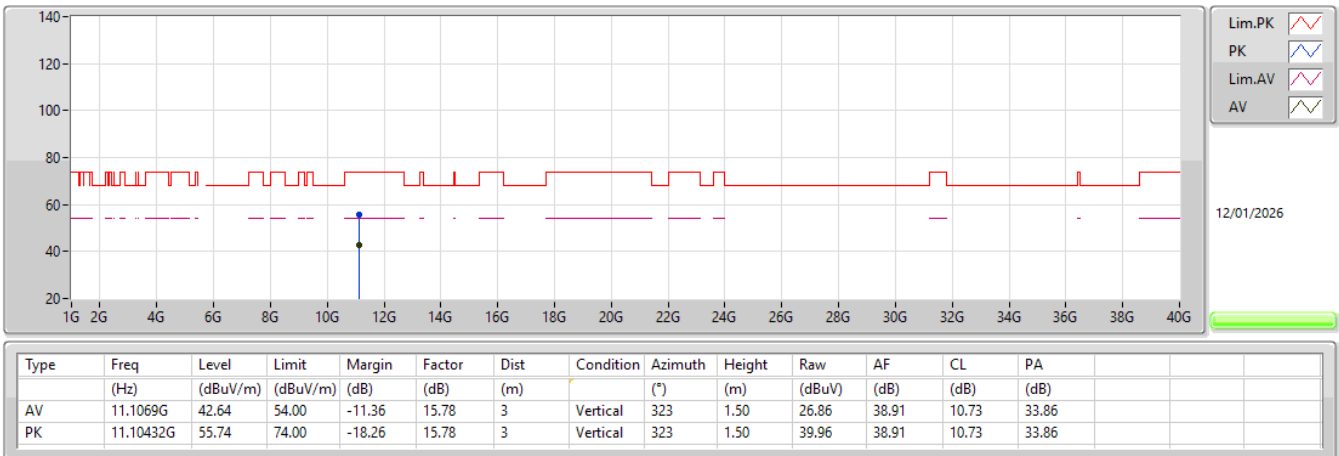


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

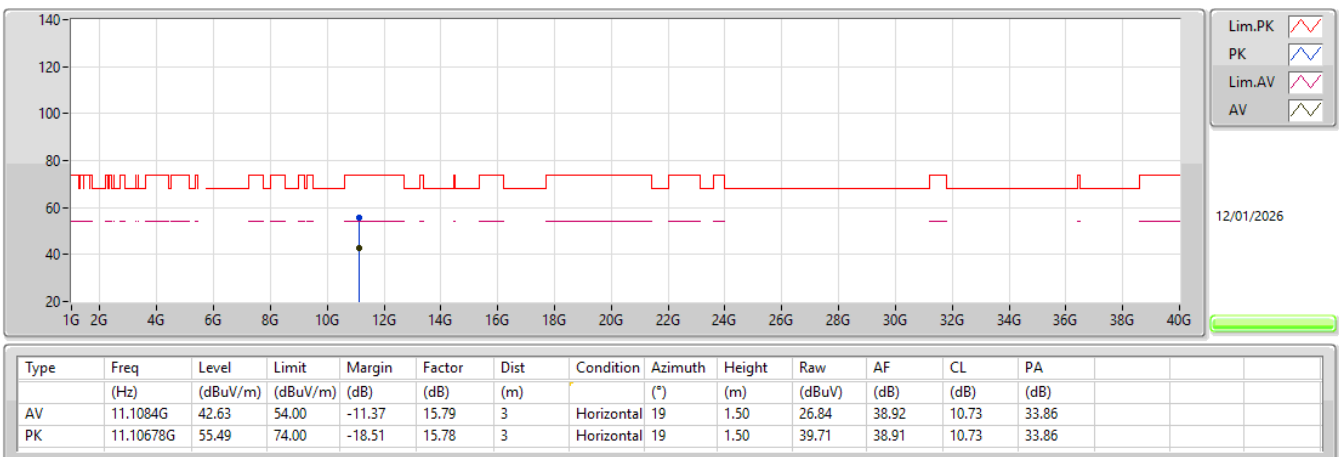

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5530MHz_TX

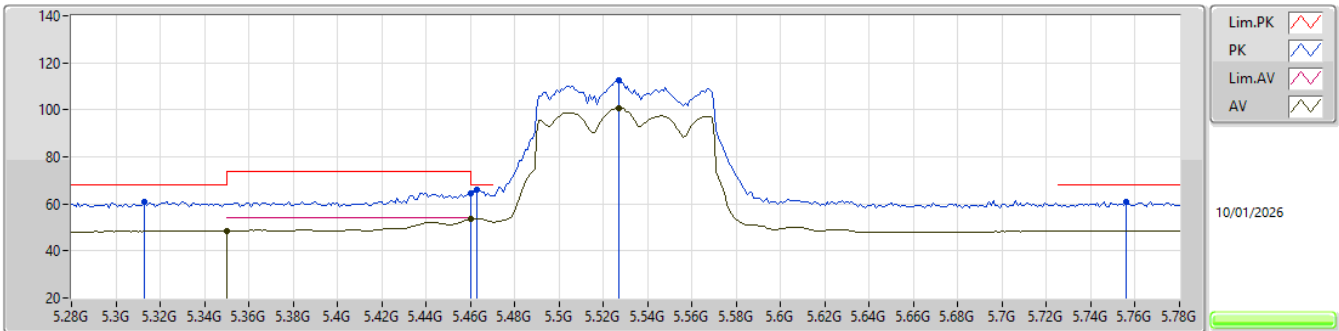

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	48.48	54.00	-5.52	6.15	3	Vertical	8	1.78	42.33	33.00	7.46	34.31
AV	5.46G	53.44	54.00	-0.56	6.24	3	Vertical	8	1.78	47.20	33.00	7.53	34.29
AV	5.527G	100.72	Inf	-Inf	6.26	3	Vertical	8	1.78	94.46	33.00	7.56	34.30
PK	5.313G	61.11	68.20	-7.09	6.05	3	Vertical	8	1.78	55.06	32.93	7.44	34.32
PK	5.46G	64.74	74.00	-9.26	6.24	3	Vertical	8	1.78	58.50	33.00	7.53	34.29
PK	5.463G	65.90	68.20	-2.30	6.24	3	Vertical	8	1.78	59.66	33.00	7.53	34.29
PK	5.527G	112.39	Inf	-Inf	6.26	3	Vertical	8	1.78	106.13	33.00	7.56	34.30
PK	5.756G	61.03	68.20	-7.17	7.28	3	Vertical	8	1.78	53.75	33.84	7.86	34.42

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5530MHz_TX

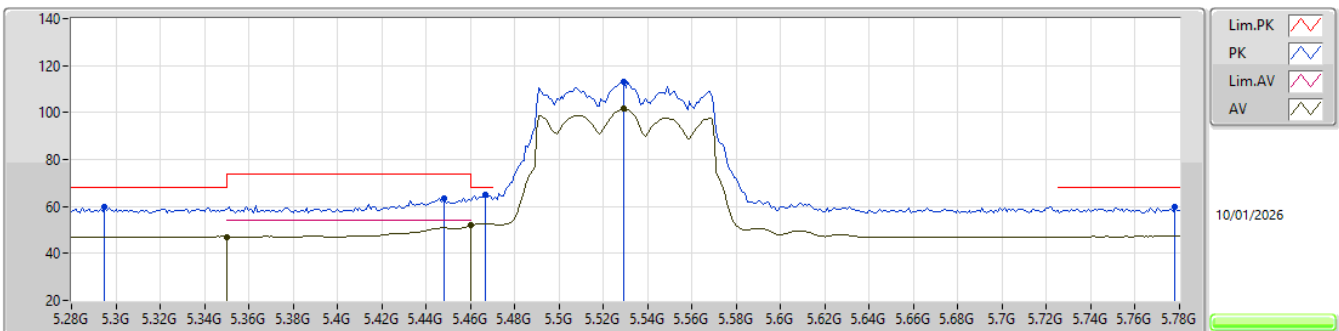

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	47.13	54.00	-6.87	6.15	3	Horizontal	348	1.99	40.98	33.00	7.46	34.31
AV	5.46G	51.91	54.00	-2.09	6.24	3	Horizontal	348	1.99	45.67	33.00	7.53	34.29
AV	5.529G	101.47	Inf	-Inf	6.26	3	Horizontal	348	1.99	95.21	33.00	7.56	34.30
PK	5.295G	59.89	68.20	-8.31	6.01	3	Horizontal	348	1.99	53.88	32.91	7.43	34.33
PK	5.448G	63.62	74.00	-10.38	6.23	3	Horizontal	348	1.99	57.39	33.00	7.52	34.29
PK	5.467G	65.24	68.20	-2.96	6.24	3	Horizontal	348	1.99	59.00	33.00	7.53	34.29
PK	5.529G	113.12	Inf	-Inf	6.26	3	Horizontal	348	1.99	106.86	33.00	7.56	34.30
PK	5.778G	59.81	68.20	-8.39	7.42	3	Horizontal	348	1.99	52.39	33.97	7.89	34.44


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5530MHz_TX

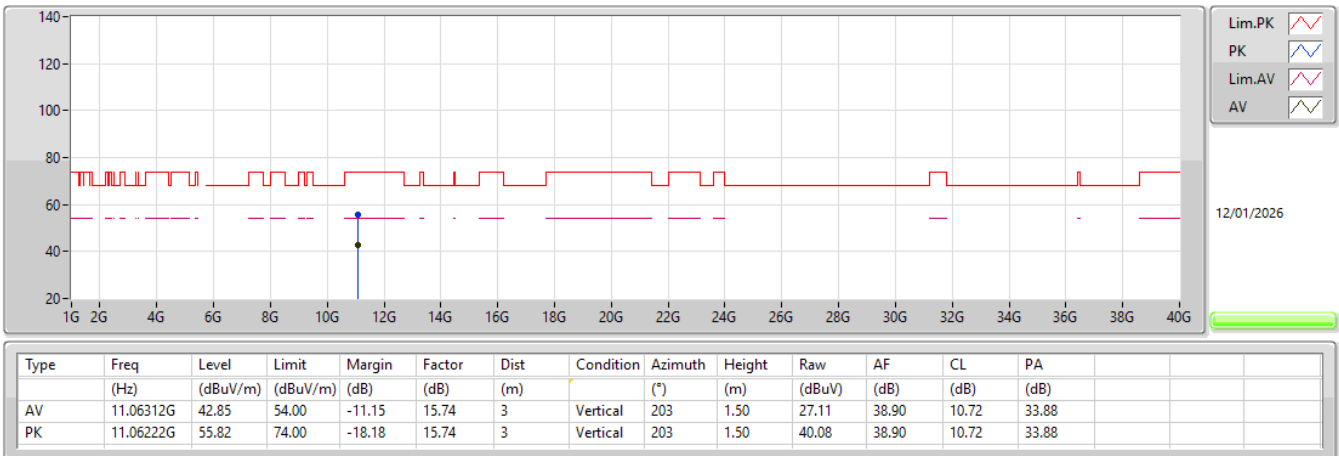


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5530MHz_TX

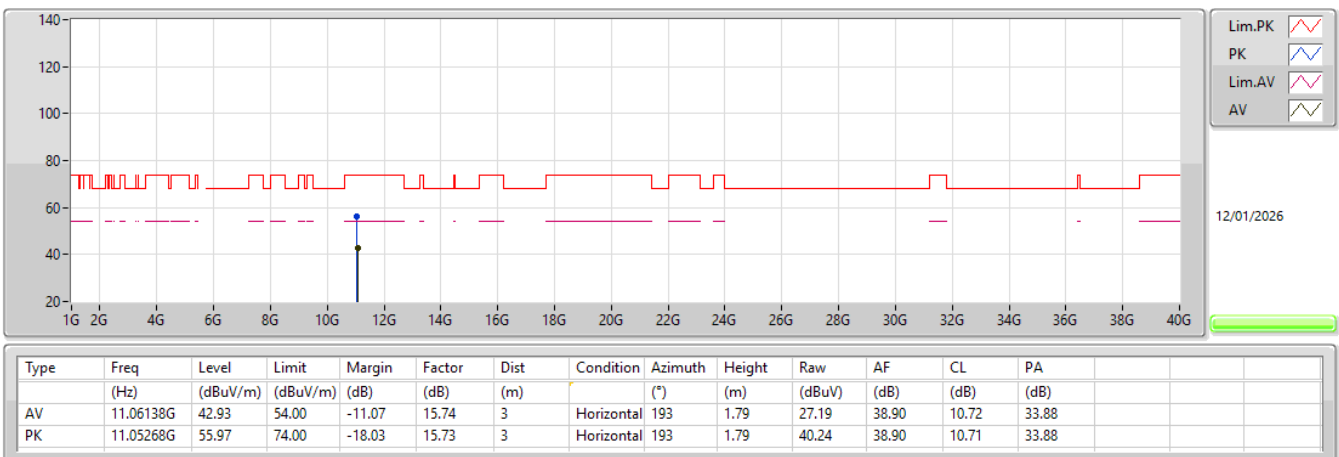


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

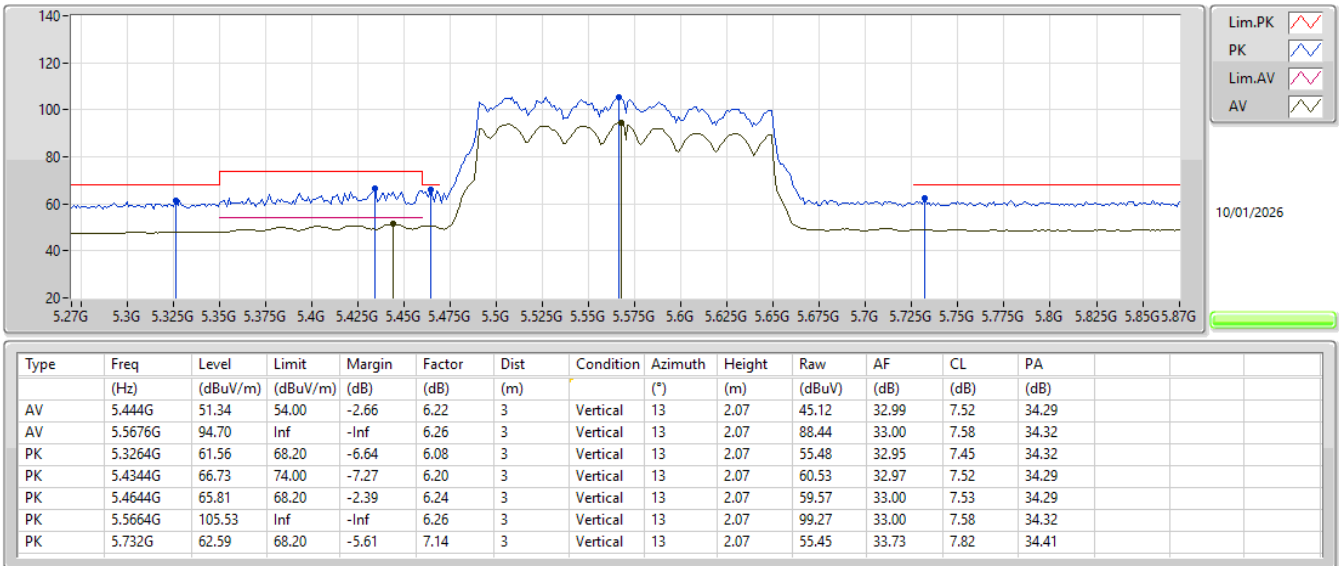


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

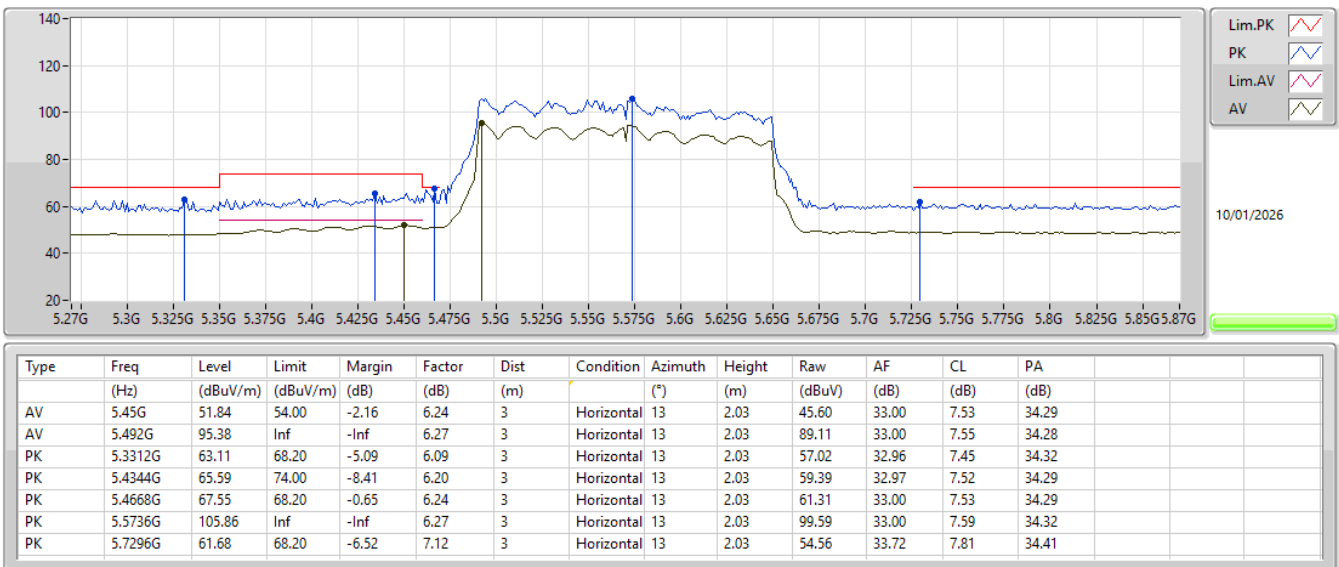


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

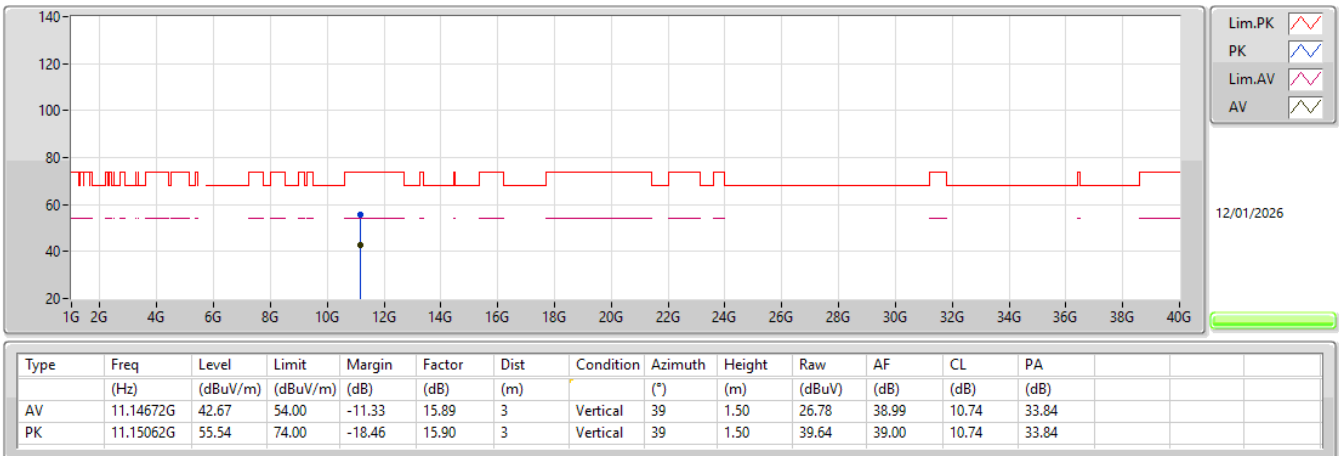


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

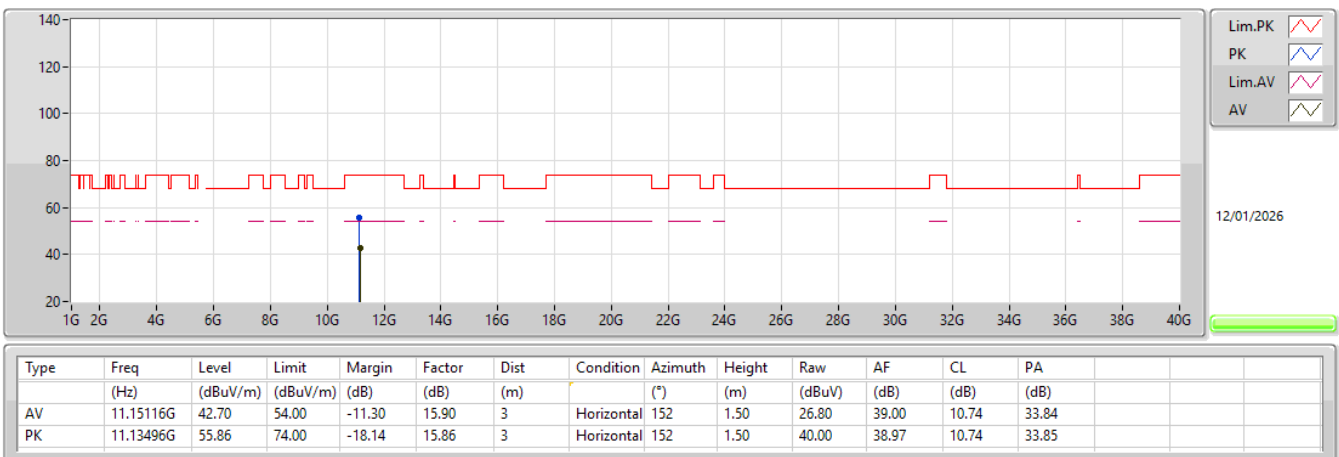


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

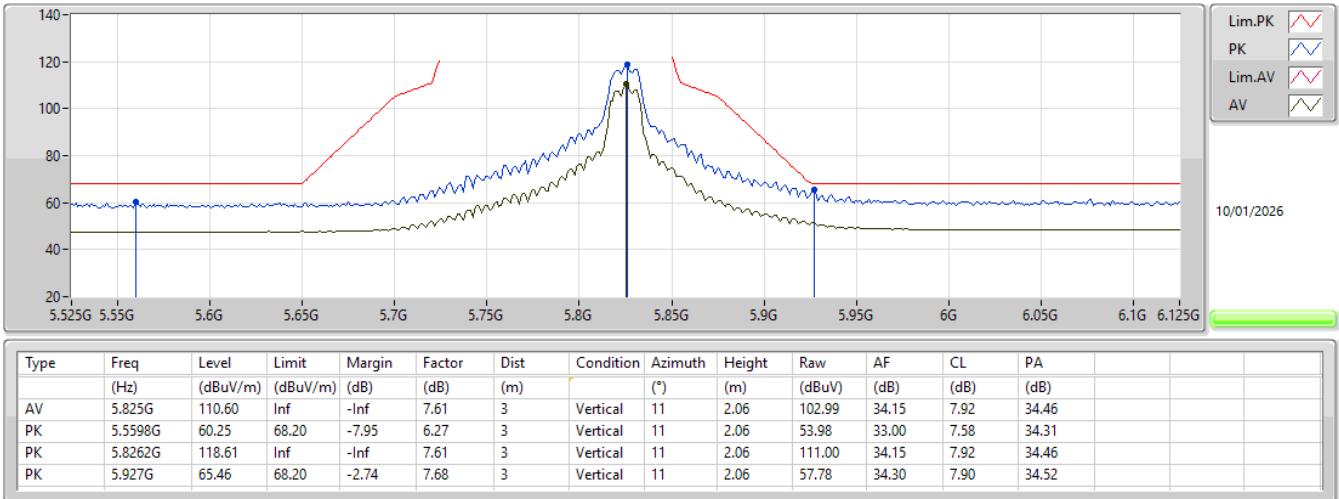


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

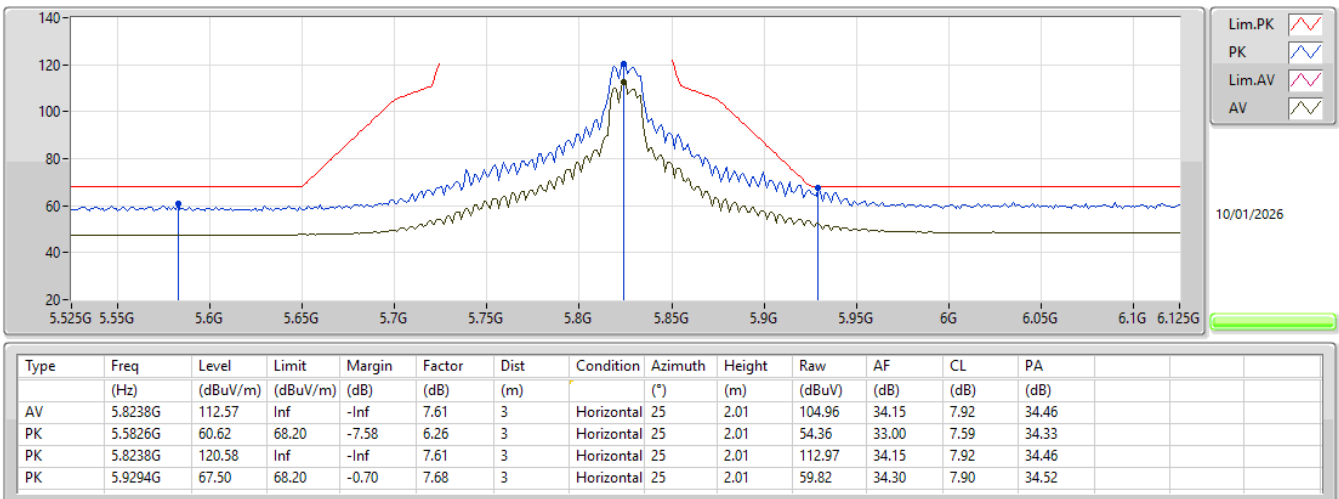


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

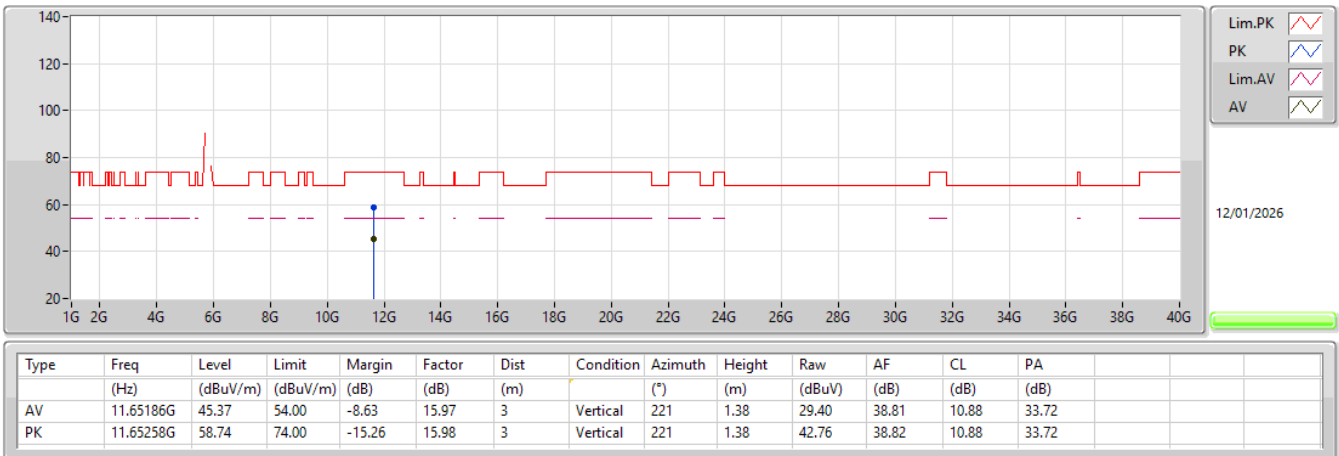


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

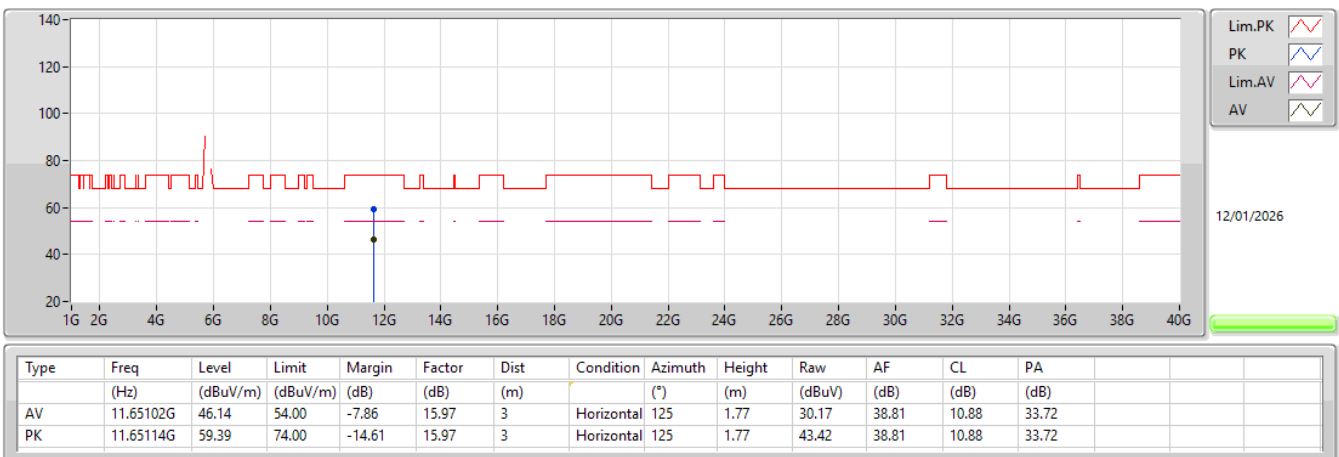


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

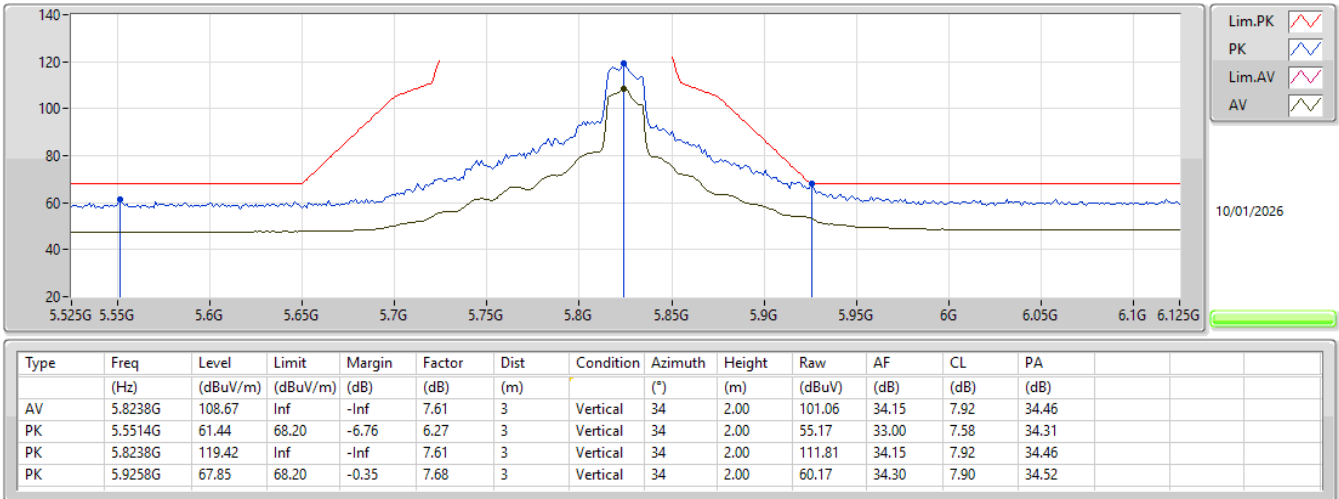


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

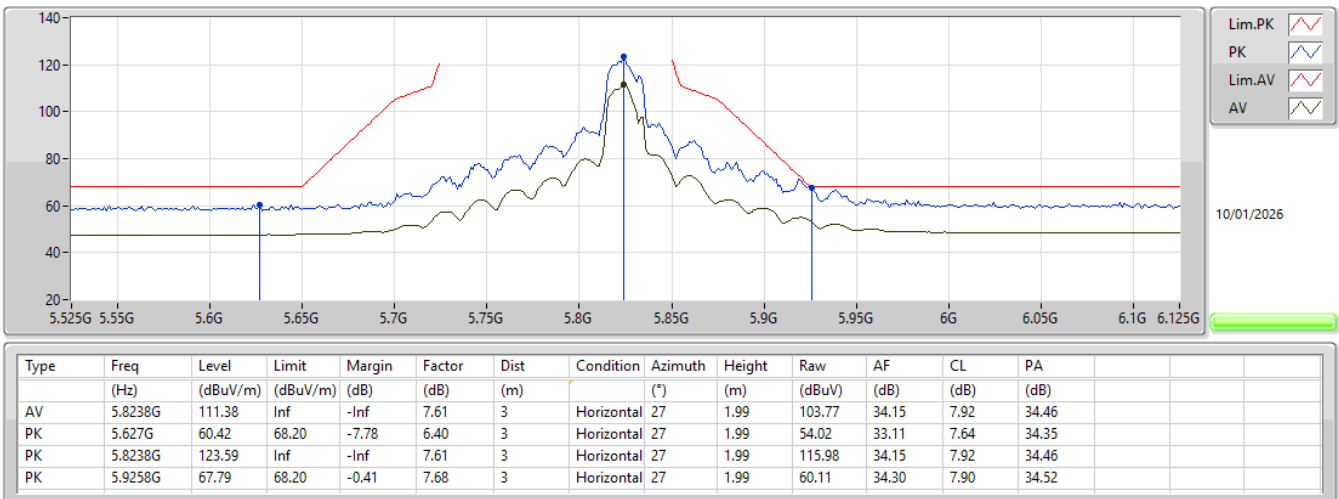


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

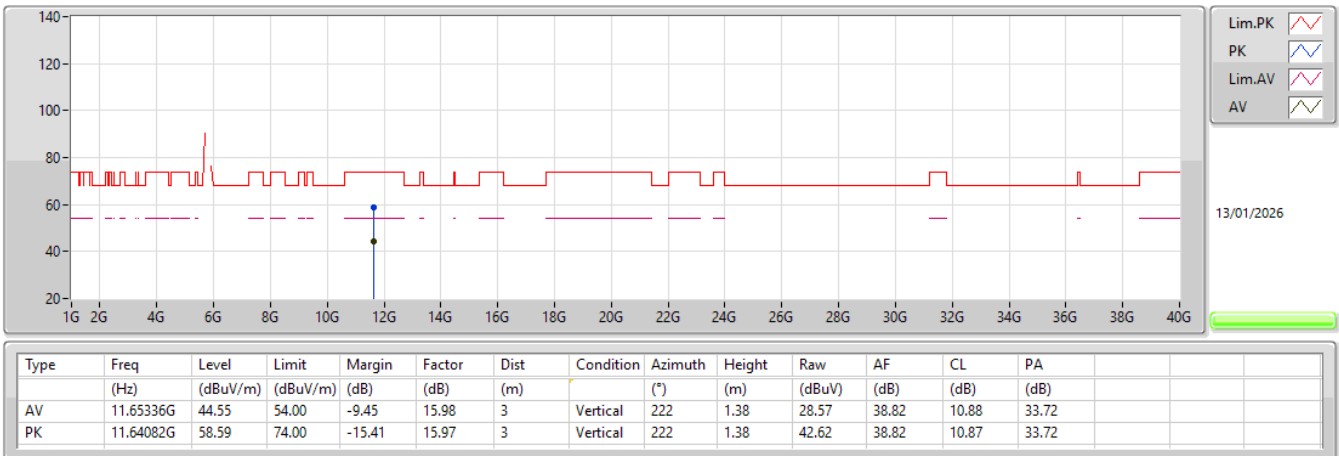


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

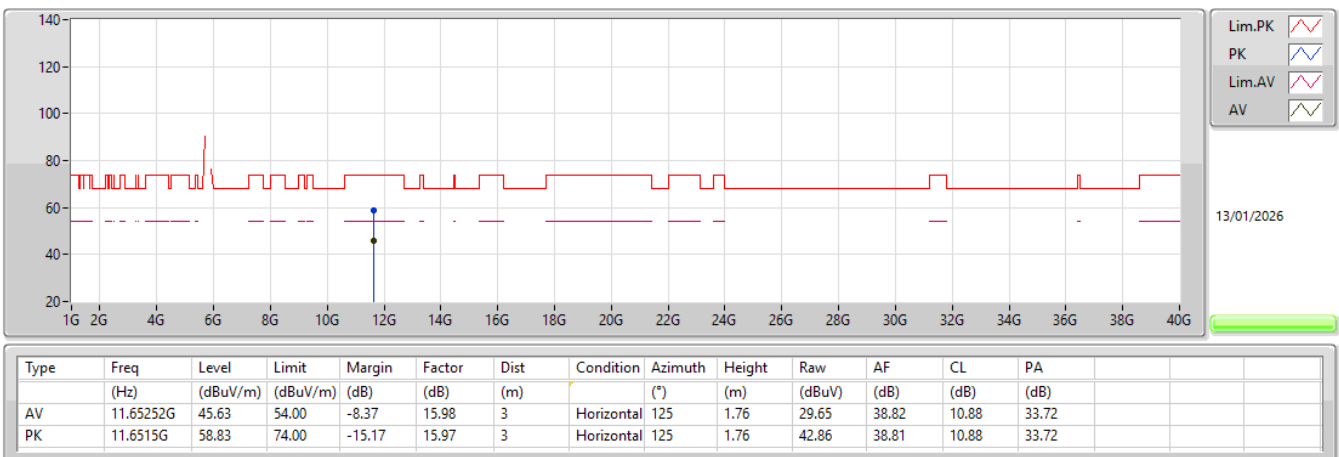


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5755MHz_TX

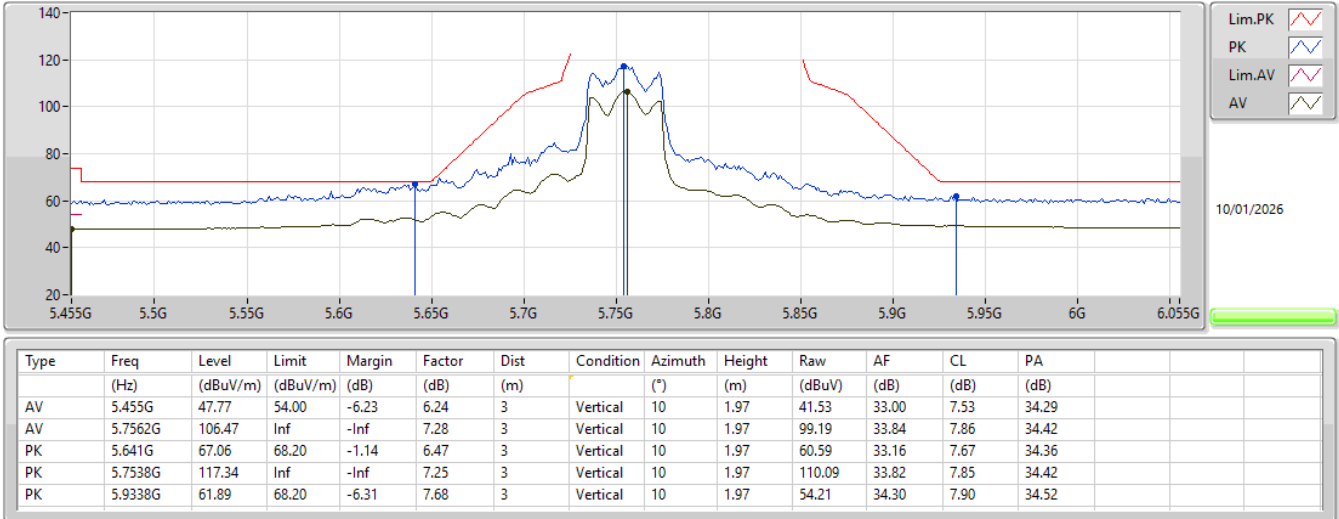


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5755MHz_TX

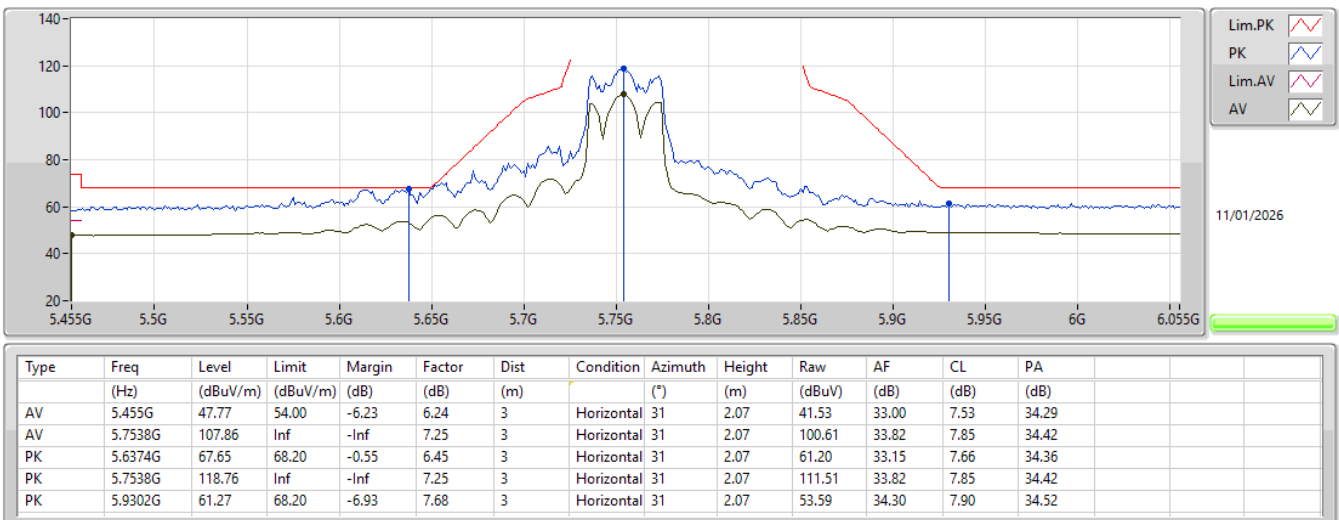


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5755MHz_TX

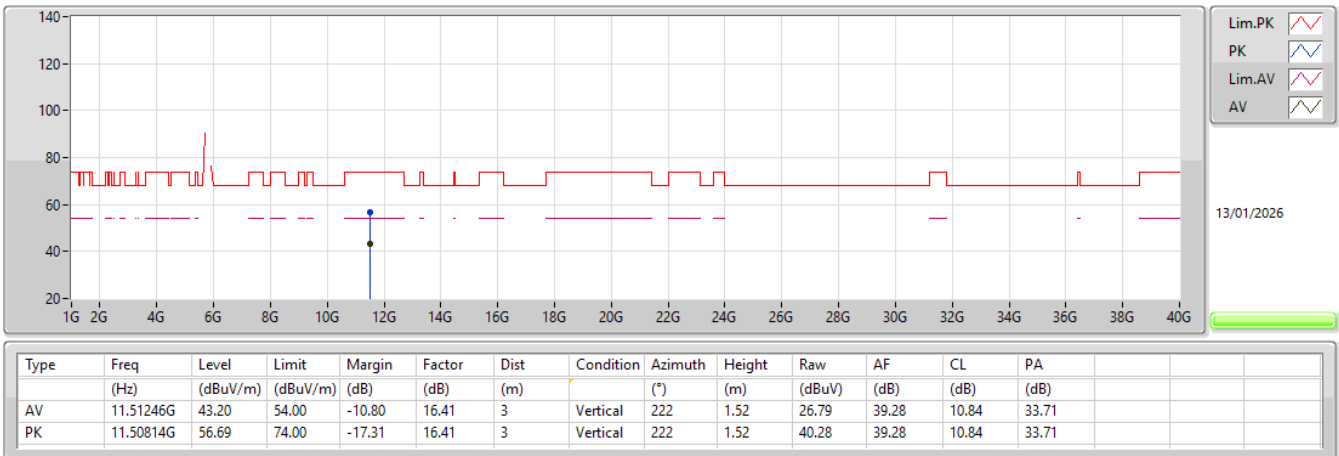


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5755MHz_TX

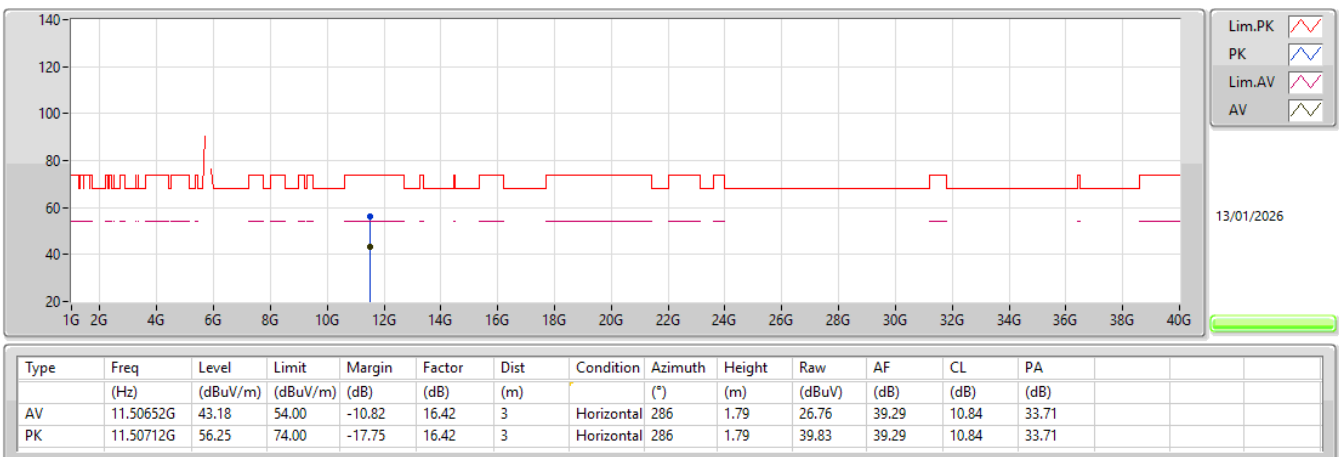


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

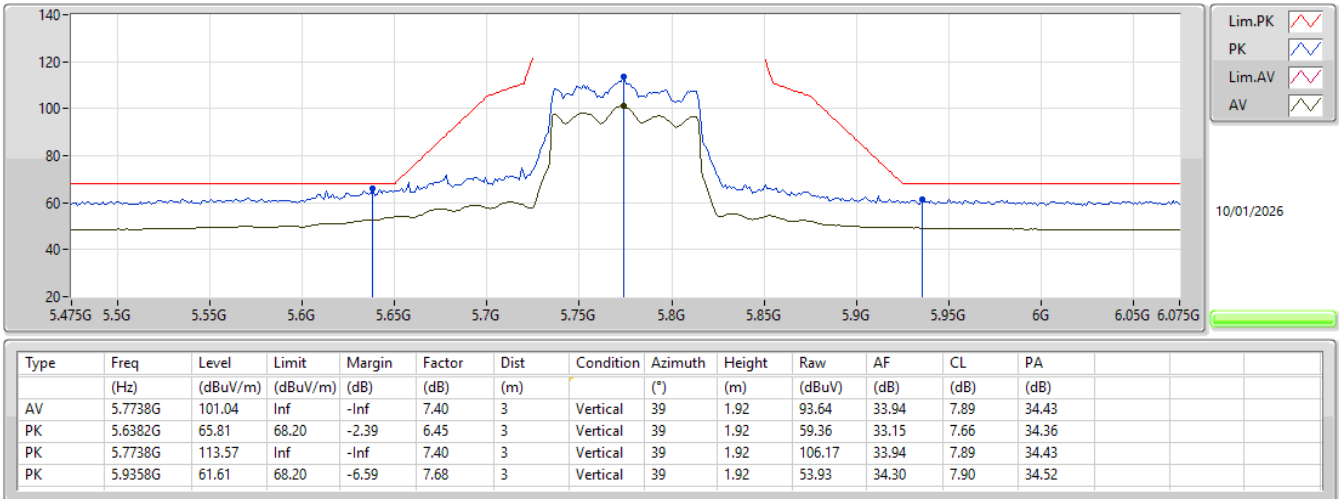


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

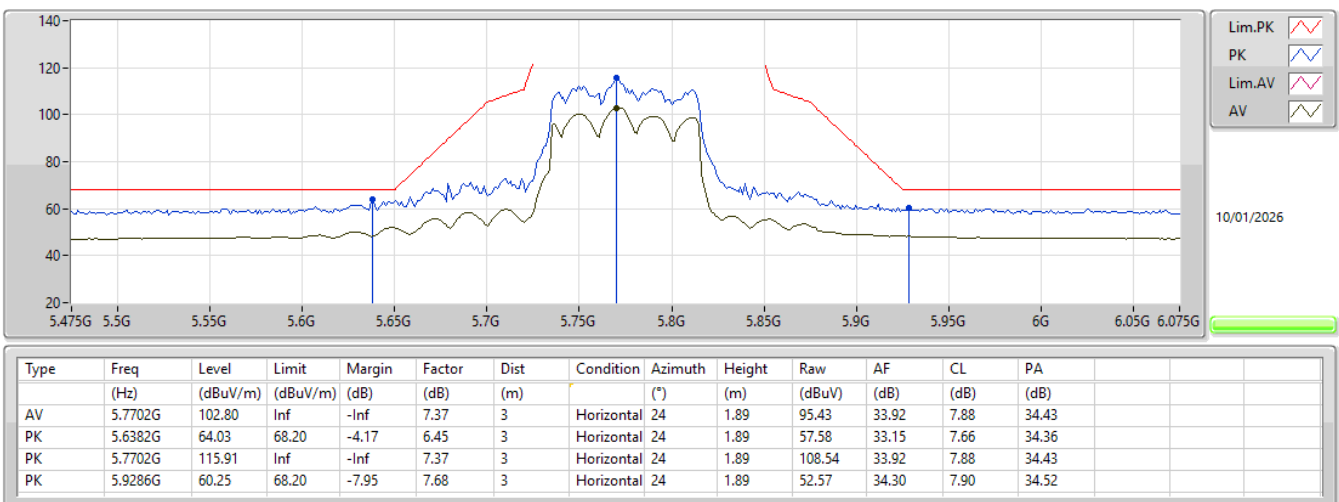


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

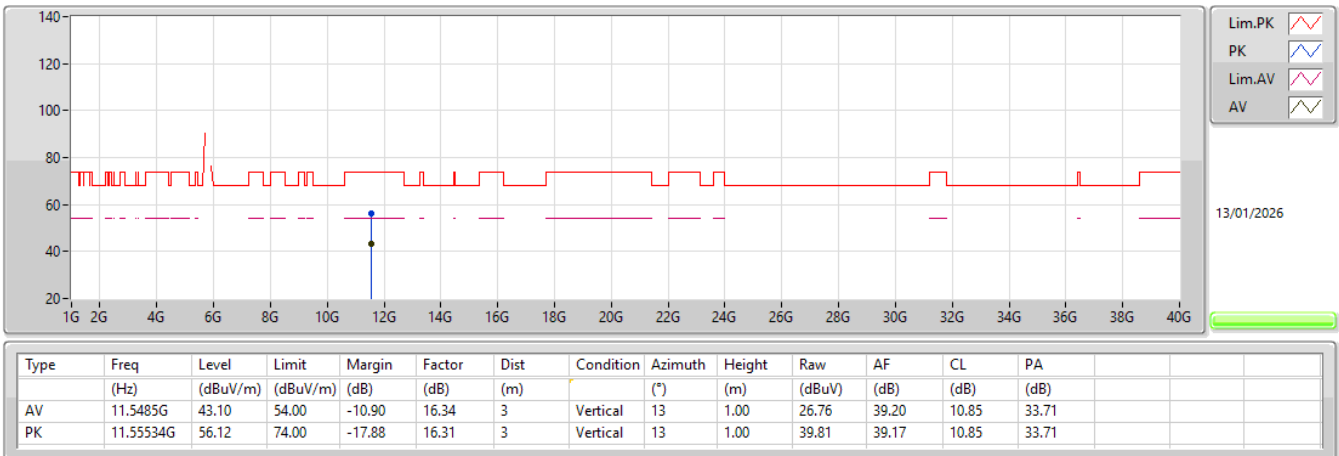


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

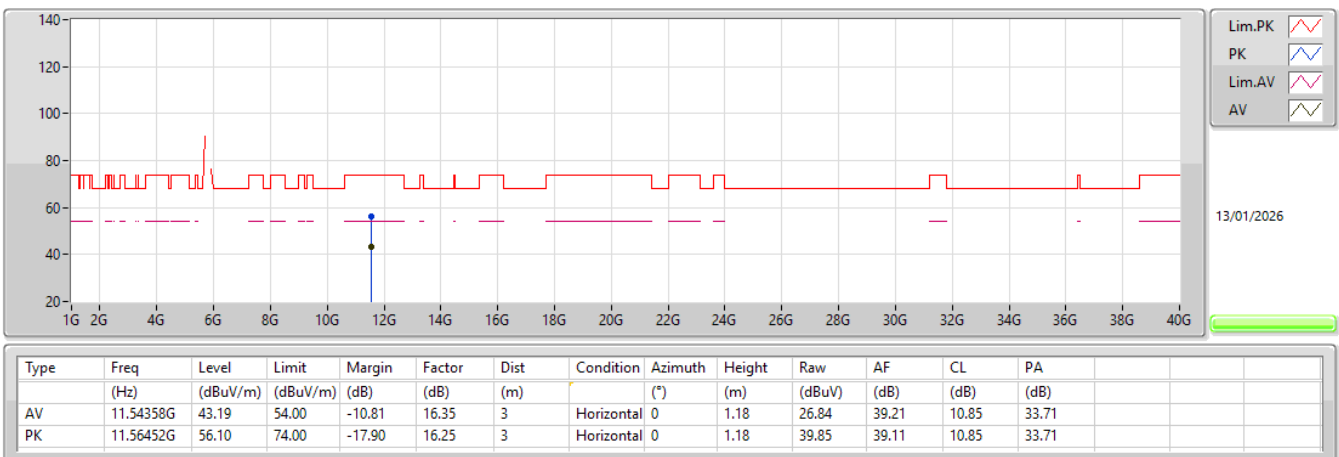

5.85-5.895GHz_802.11a_Nss1,(6Mbps)_2TX


5845MHz_TX

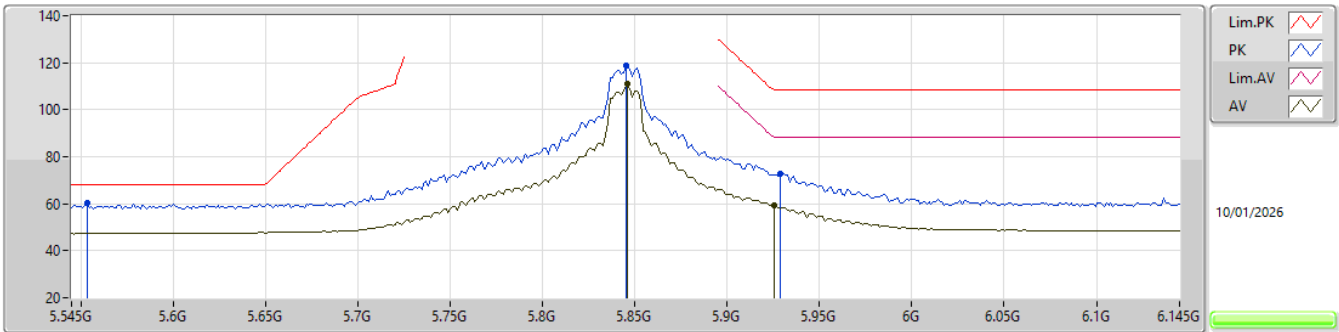

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8462G	110.85	Inf	-Inf	7.64	3	Vertical	14	2.04	103.21	34.19	7.92	34.47
AV	5.9254G	59.42	88.20	-28.78	7.68	3	Vertical	14	2.04	51.74	34.30	7.90	34.52
PK	5.5534G	60.29	68.20	-7.91	6.27	3	Vertical	14	2.04	54.02	33.00	7.58	34.31
PK	5.845G	119.02	Inf	-Inf	7.64	3	Vertical	14	2.04	111.38	34.19	7.92	34.47
PK	5.929G	72.94	108.20	-35.26	7.68	3	Vertical	14	2.04	65.26	34.30	7.90	34.52

5.85-5.895GHz_802.11a_Nss1,(6Mbps)_2TX


5845MHz_TX

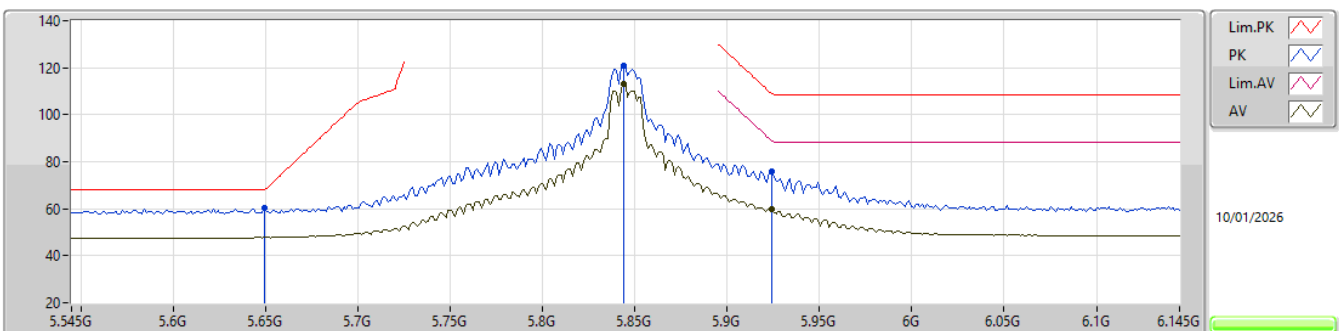

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8438G	112.99	Inf	-Inf	7.64	3	Horizontal	25	2.09	105.35	34.19	7.92	34.47
AV	5.9242G	59.77	88.79	-29.02	7.68	3	Horizontal	25	2.09	52.09	34.30	7.90	34.52
PK	5.6494G	60.09	68.20	-8.11	6.52	3	Horizontal	25	2.09	53.57	33.20	7.68	34.36
PK	5.8438G	121.06	Inf	-Inf	7.64	3	Horizontal	25	2.09	113.42	34.19	7.92	34.47
PK	5.9242G	76.10	108.79	-32.69	7.68	3	Horizontal	25	2.09	68.42	34.30	7.90	34.52


5.85-5.895GHz_802.11a_Nss1,(6Mbps)_2TX

5845MHz_TX

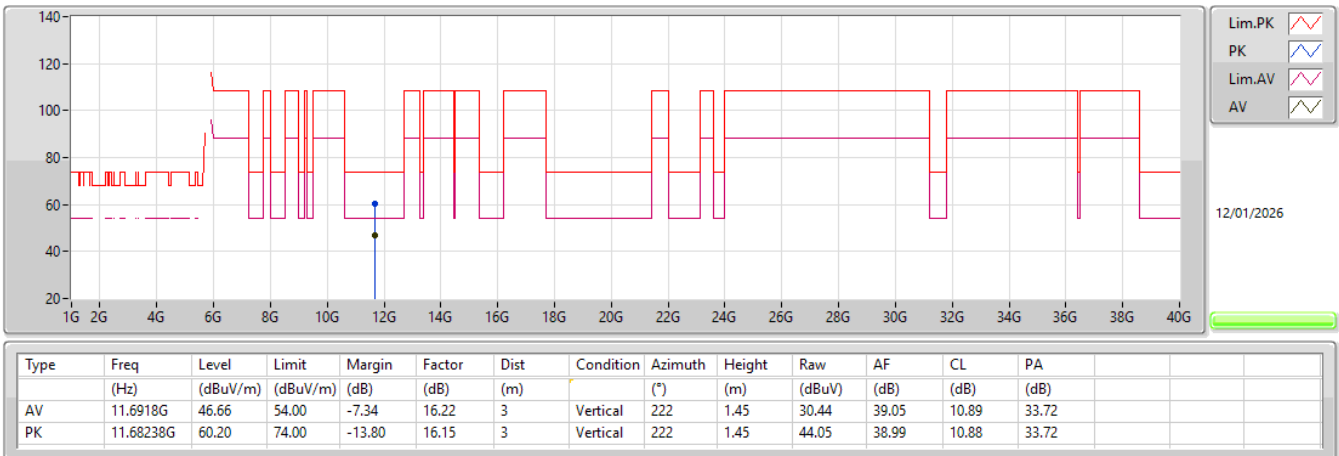


5.85-5.895GHz_802.11a_Nss1,(6Mbps)_2TX

5845MHz_TX

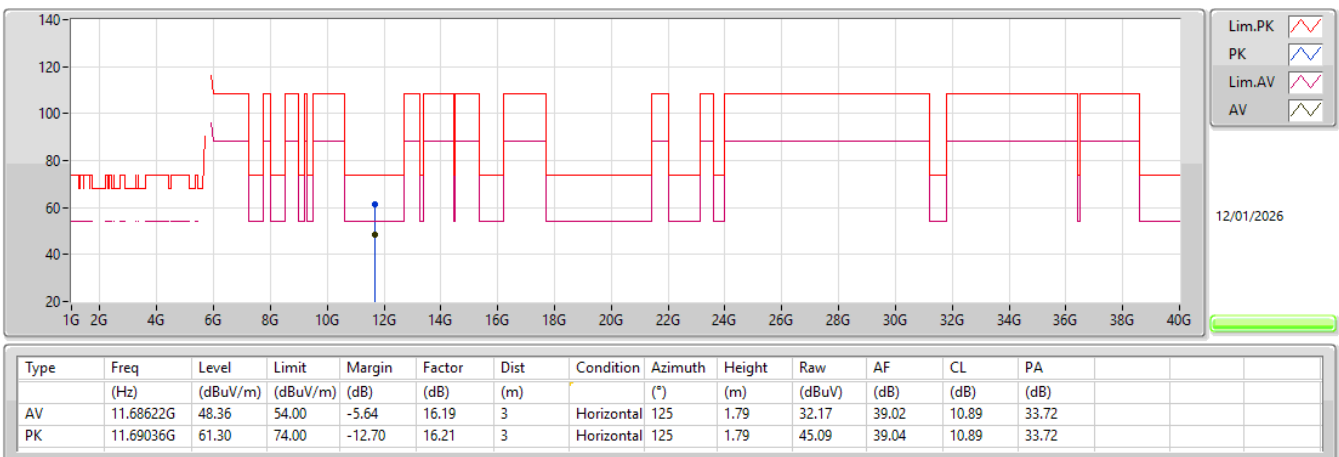

5.85-5.895GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5845MHz_TX

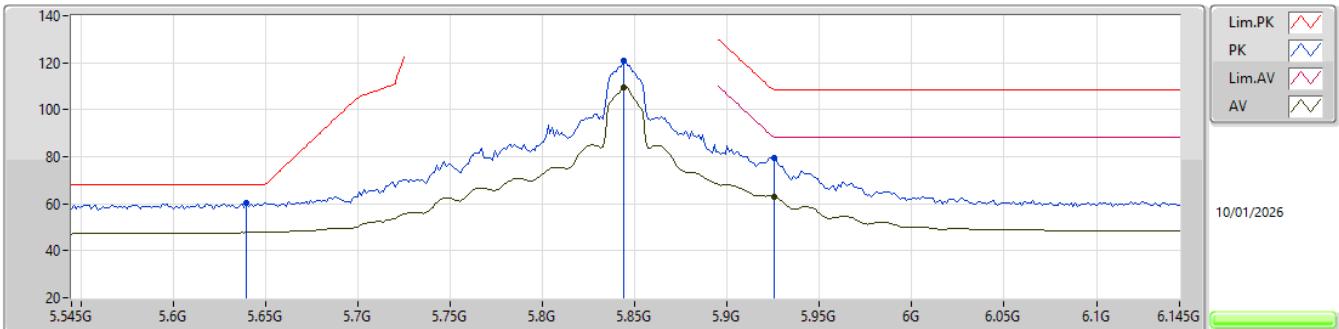

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8438G	109.56	Inf	-Inf	7.64	3	Vertical	46	2.07	101.92	34.19	7.92	34.47
AV	5.9254G	63.13	88.20	-25.07	7.68	3	Vertical	46	2.07	55.45	34.30	7.90	34.52
PK	5.6398G	60.35	68.20	-7.85	6.47	3	Vertical	46	2.07	53.88	33.16	7.67	34.36
PK	5.8438G	120.77	Inf	-Inf	7.64	3	Vertical	46	2.07	113.13	34.19	7.92	34.47
PK	5.9254G	79.67	108.20	-28.53	7.68	3	Vertical	46	2.07	71.99	34.30	7.90	34.52

5.85-5.895GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5845MHz_TX

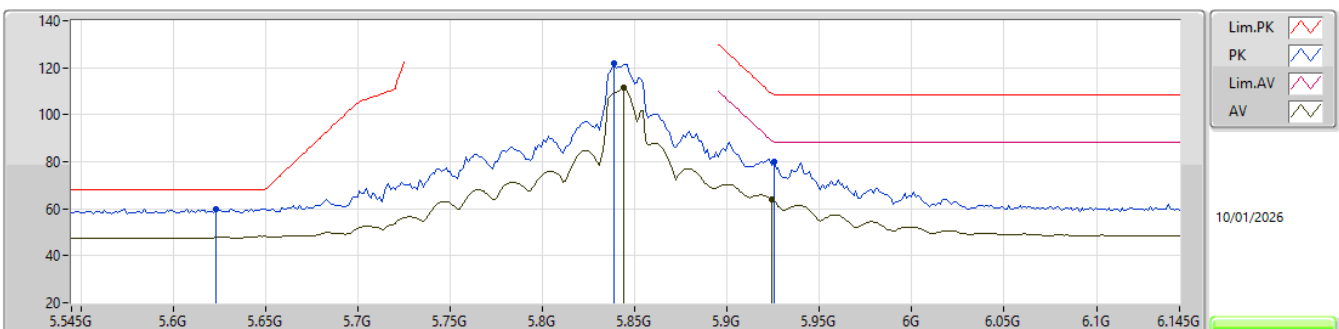

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8438G	111.41	Inf	-Inf	7.64	3	Horizontal	26	2.07	103.77	34.19	7.92	34.47
AV	5.9242G	63.91	88.79	-24.88	7.68	3	Horizontal	26	2.07	56.23	34.30	7.90	34.52
PK	5.623G	60.01	68.20	-8.19	6.38	3	Horizontal	26	2.07	53.63	33.09	7.64	34.35
PK	5.839G	122.08	Inf	-Inf	7.63	3	Horizontal	26	2.07	114.45	34.18	7.92	34.47
PK	5.9254G	79.81	108.20	-28.39	7.68	3	Horizontal	26	2.07	72.13	34.30	7.90	34.52


5.85-5.895GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5845MHz_TX

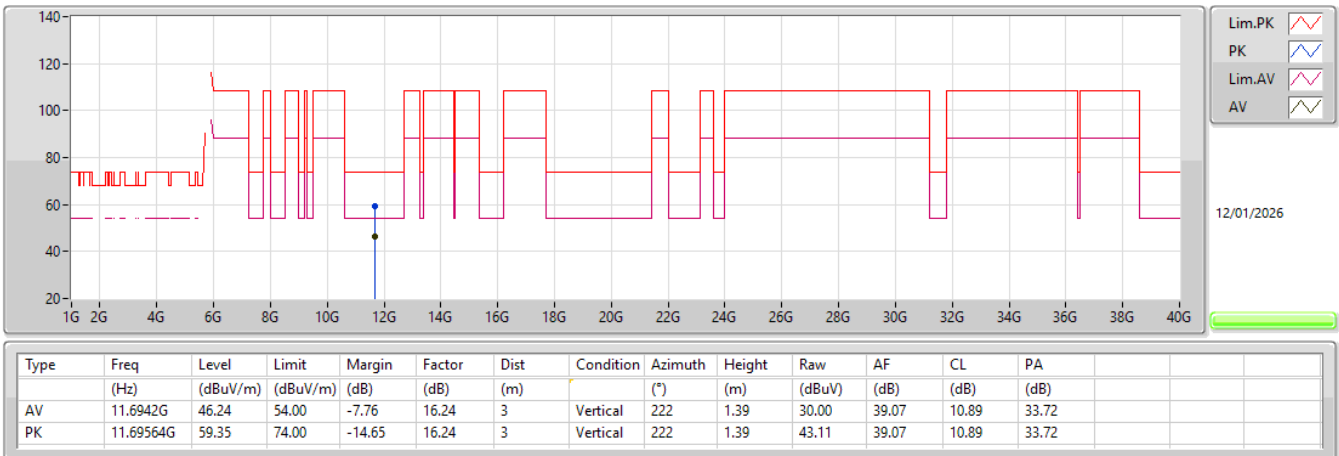


5.85-5.895GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5845MHz_TX

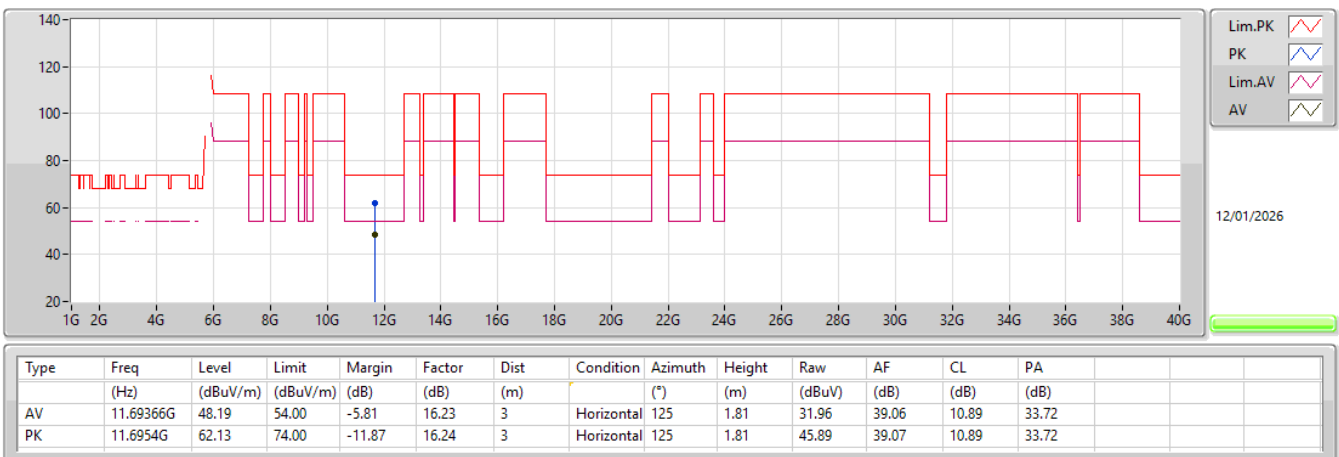

5.85-5.895GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5875MHz_TX

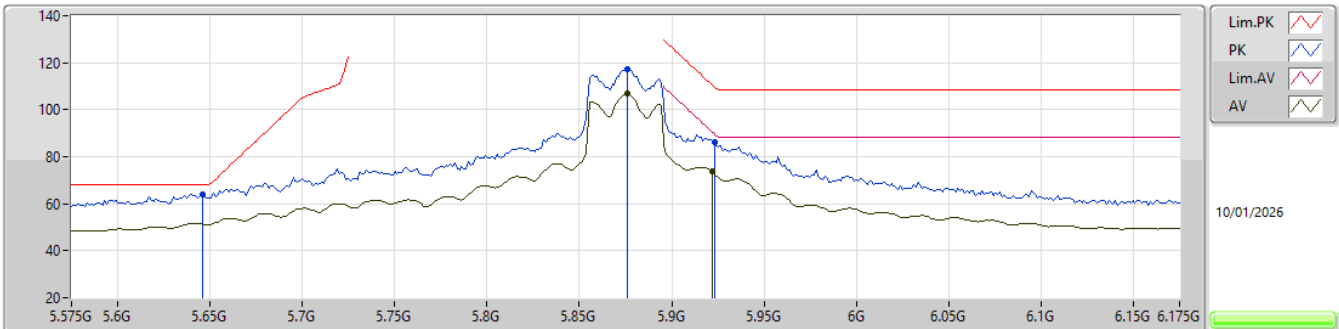

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)				
AV	5.8762G	106.69	Inf	-Inf	7.67	3	Vertical	23	1.06	99.02	34.25	7.91	34.49				
AV	5.9218G	73.73	90.55	-16.82	7.68	3	Vertical	23	1.06	66.05	34.30	7.90	34.52				
PK	5.6458G	63.74	68.20	-4.46	6.50	3	Vertical	23	1.06	57.24	33.18	7.68	34.36				
PK	5.8762G	117.46	Inf	-Inf	7.67	3	Vertical	23	1.06	109.79	34.25	7.91	34.49				
PK	5.923G	86.08	109.67	-23.59	7.68	3	Vertical	23	1.06	78.40	34.30	7.90	34.52				

5.85-5.895GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5875MHz_TX

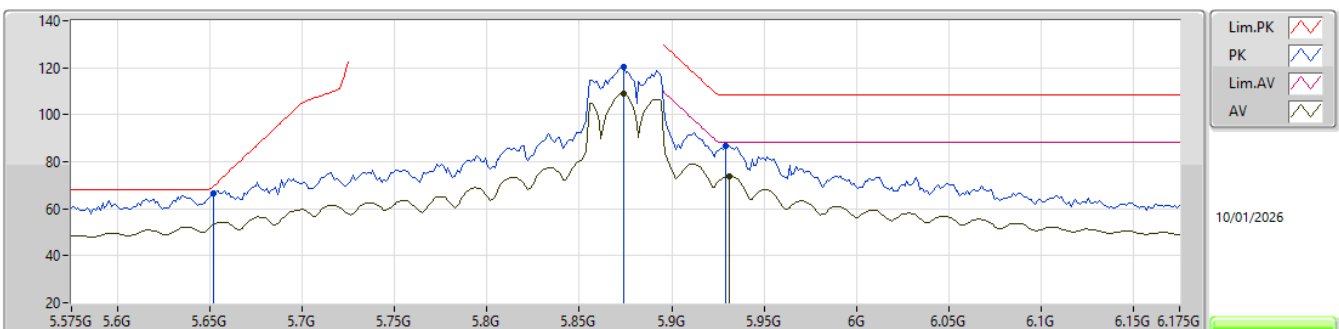

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)				
AV	5.8738G	108.99	Inf	-Inf	7.67	3	Horizontal	299	1.00	101.32	34.25	7.91	34.49				
AV	5.9314G	73.74	88.20	-14.46	7.68	3	Horizontal	299	1.00	66.06	34.30	7.90	34.52				
PK	5.6518G	66.74	69.53	-2.79	6.53	3	Horizontal	299	1.00	60.21	33.21	7.69	34.37				
PK	5.8738G	120.51	Inf	-Inf	7.67	3	Horizontal	299	1.00	112.84	34.25	7.91	34.49				
PK	5.929G	86.89	108.20	-21.31	7.68	3	Horizontal	299	1.00	79.21	34.30	7.90	34.52				


5.85-5.895GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5875MHz_TX

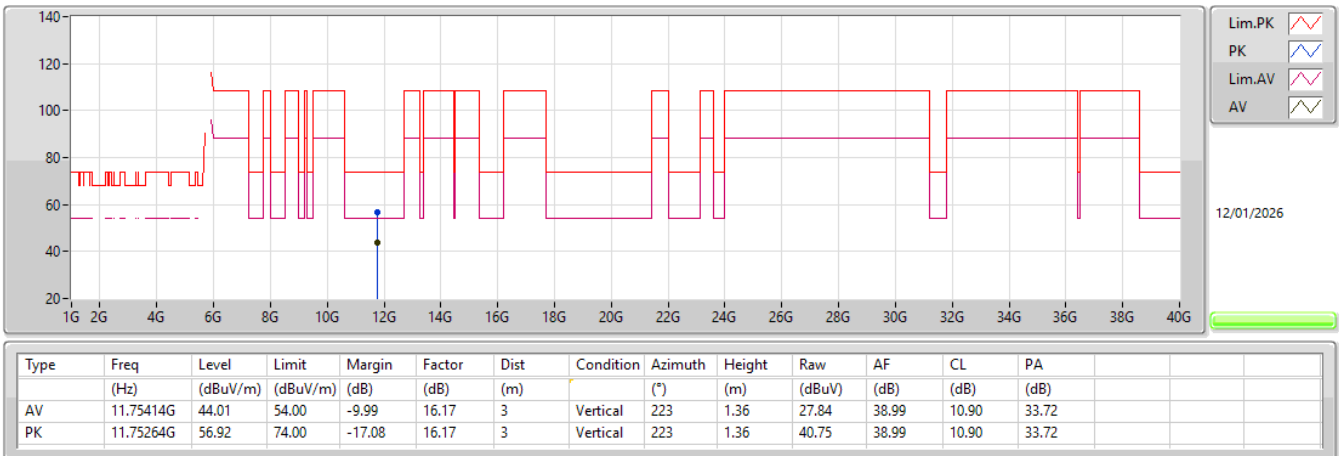


5.85-5.895GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5875MHz_TX

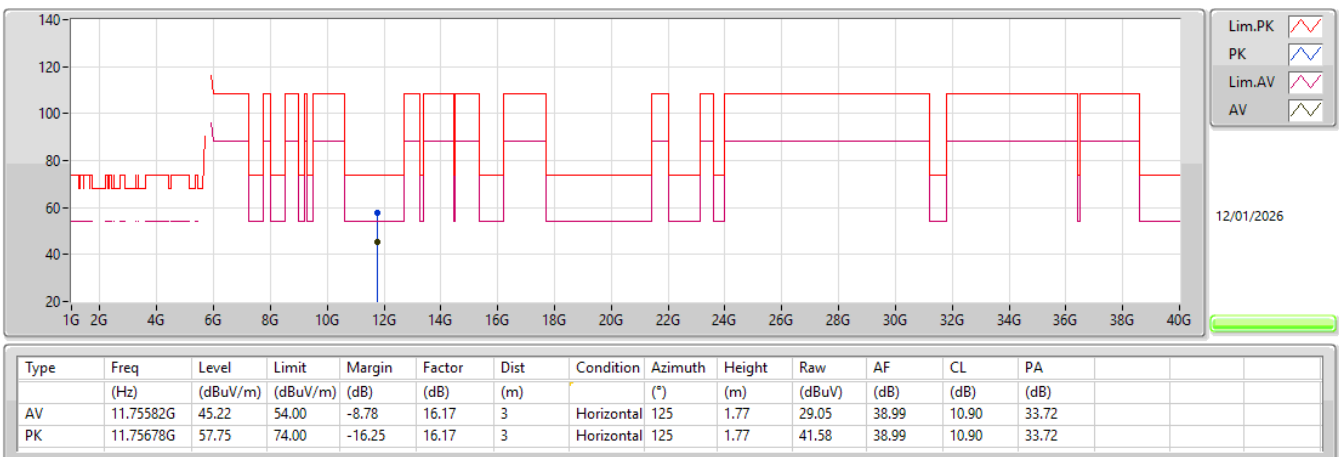

5.85-5.895GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5855MHz_TX

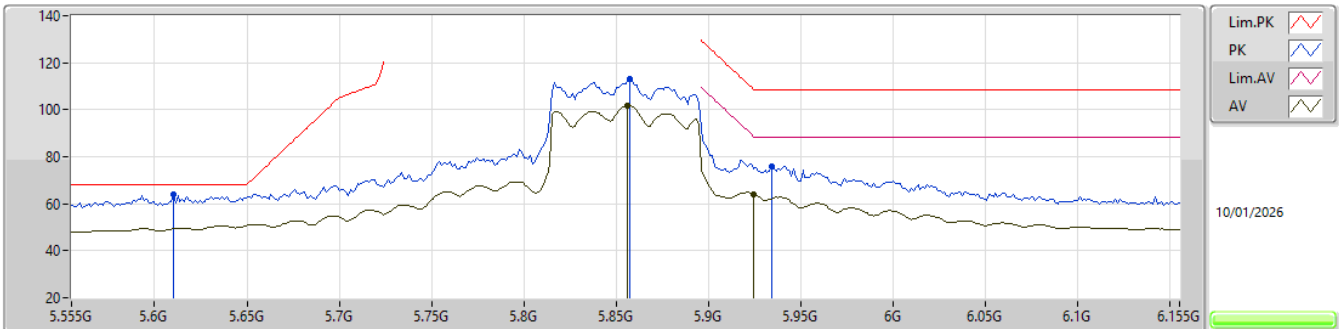

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8562G	101.81	Inf	-Inf	7.65	3	Vertical	29	1.00	94.16	34.21	7.92	34.48
AV	5.9246G	64.03	88.49	-24.46	7.68	3	Vertical	29	1.00	56.35	34.30	7.90	34.52
PK	5.6102G	64.11	68.20	-4.09	6.32	3	Vertical	29	1.00	57.79	33.04	7.62	34.34
PK	5.8574G	113.29	Inf	-Inf	7.65	3	Vertical	29	1.00	105.64	34.21	7.92	34.48
PK	5.9342G	75.85	108.20	-32.35	7.68	3	Vertical	29	1.00	68.17	34.30	7.90	34.52

5.85-5.895GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5855MHz_TX

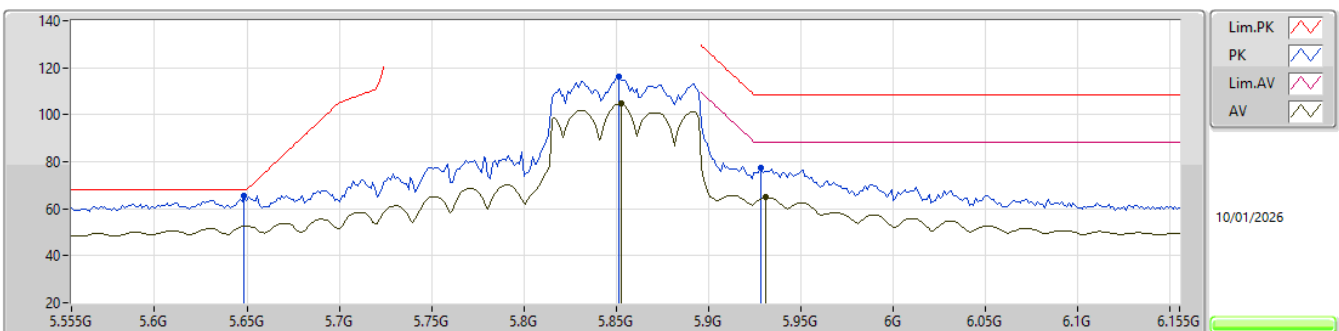

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8526G	104.59	Inf	-Inf	7.65	3	Horizontal	25	1.99	96.94	34.21	7.92	34.48
AV	5.9306G	64.82	88.20	-23.38	7.68	3	Horizontal	25	1.99	57.14	34.30	7.90	34.52
PK	5.6486G	65.42	68.20	-2.78	6.51	3	Horizontal	25	1.99	58.91	33.19	7.68	34.36
PK	5.8514G	116.17	Inf	-Inf	7.64	3	Horizontal	25	1.99	108.53	34.20	7.92	34.48
PK	5.9282G	77.19	108.20	-31.01	7.68	3	Horizontal	25	1.99	69.51	34.30	7.90	34.52


5.85-5.895GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5855MHz_TX

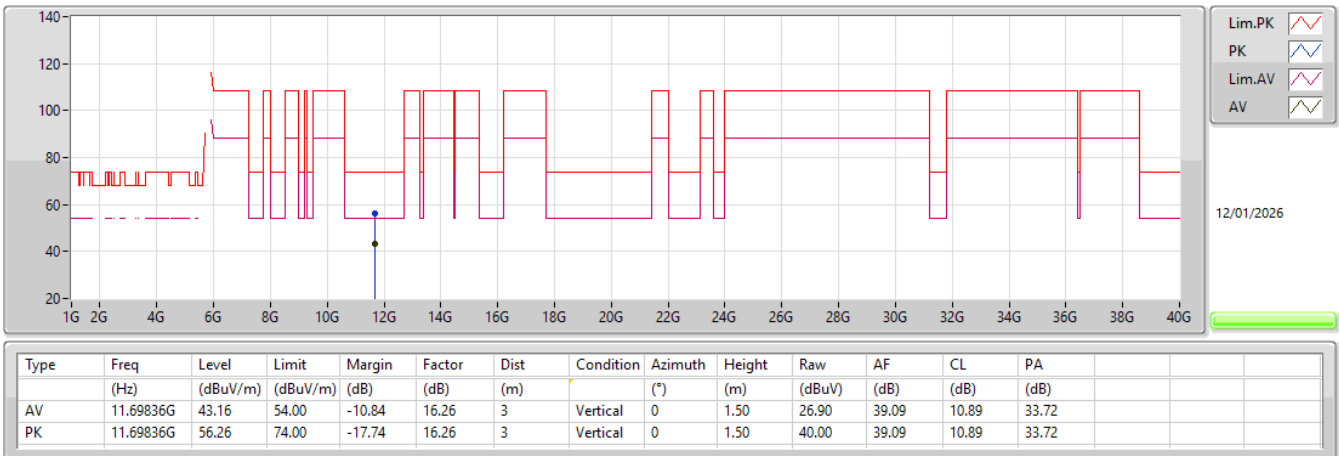


5.85-5.895GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5855MHz_TX

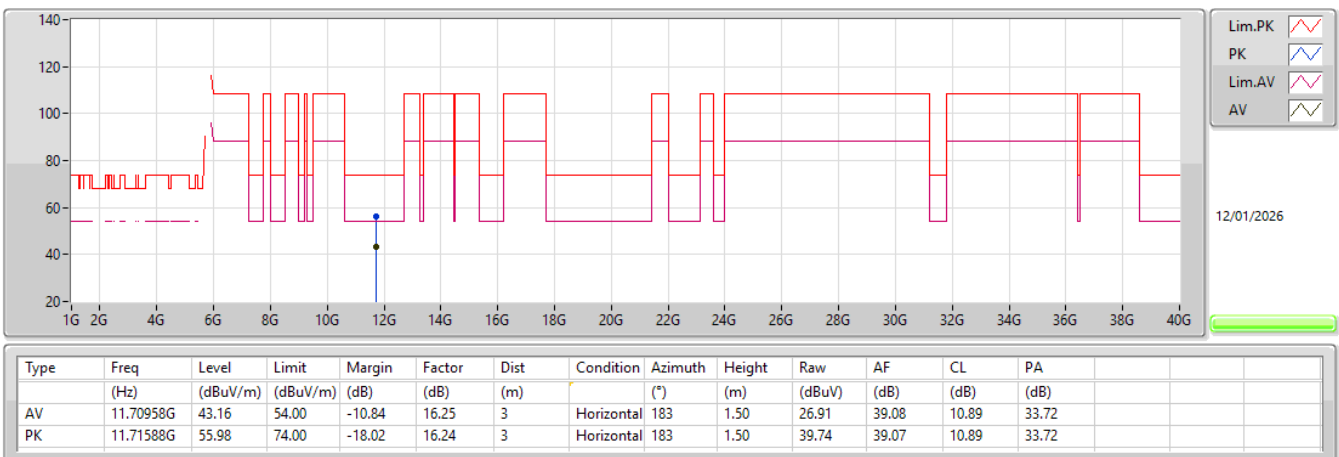

5.85-5.895GHz_802.11be EHT160_Nss1,(MCS0)_2TX


5815MHz_TX

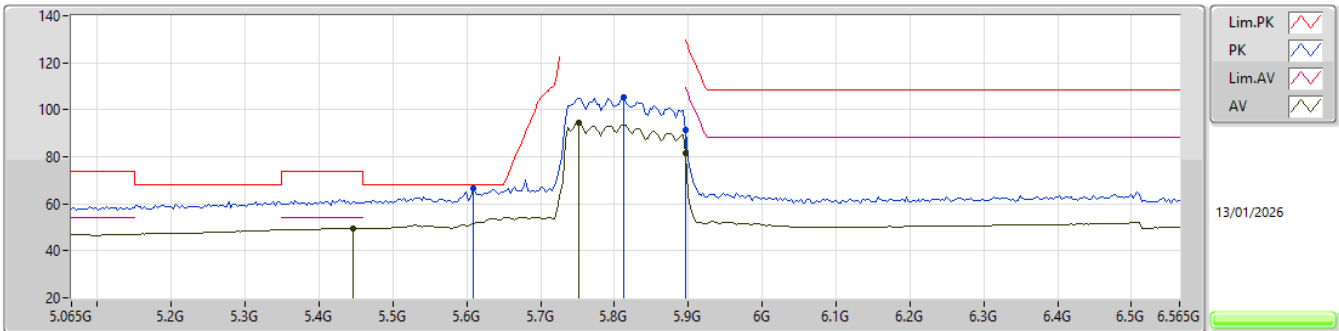

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.446G	49.56	54.00	-4.44	6.22	3	Vertical	36	1.89	43.34	32.99	7.52	34.29
AV	5.752G	94.31	Inf	-Inf	7.24	3	Vertical	36	1.89	87.07	33.81	7.85	34.42
AV	5.896G	81.32	109.47	-28.15	7.70	3	Vertical	36	1.89	73.62	34.29	7.91	34.50
PK	5.608G	66.49	68.20	-1.71	6.30	3	Vertical	36	1.89	60.19	33.03	7.61	34.34
PK	5.812G	105.19	Inf	-Inf	7.60	3	Vertical	36	1.89	97.59	34.12	7.93	34.45
PK	5.896G	91.29	129.47	-38.18	7.70	3	Vertical	36	1.89	83.59	34.29	7.91	34.50

5.85-5.895GHz_802.11be EHT160_Nss1,(MCS0)_2TX


5815MHz_TX

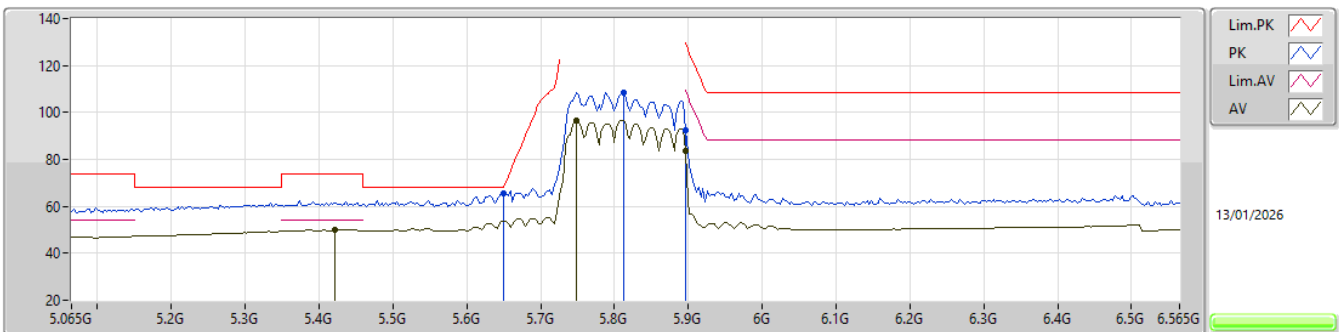

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.422G	49.94	54.00	-4.06	6.15	3	Horizontal	24	2.08	43.79	32.94	7.51	34.30
AV	5.749G	96.68	Inf	-Inf	7.23	3	Horizontal	24	2.08	89.45	33.80	7.85	34.42
AV	5.896G	83.50	109.47	-25.97	7.70	3	Horizontal	24	2.08	75.80	34.29	7.91	34.50
PK	5.65G	65.53	68.20	-2.67	6.52	3	Horizontal	24	2.08	59.01	33.20	7.68	34.36
PK	5.812G	108.57	Inf	-Inf	7.60	3	Horizontal	24	2.08	100.97	34.12	7.93	34.45
PK	5.896G	92.55	129.47	-36.92	7.70	3	Horizontal	24	2.08	84.85	34.29	7.91	34.50


5.85-5.895GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5815MHz_TX

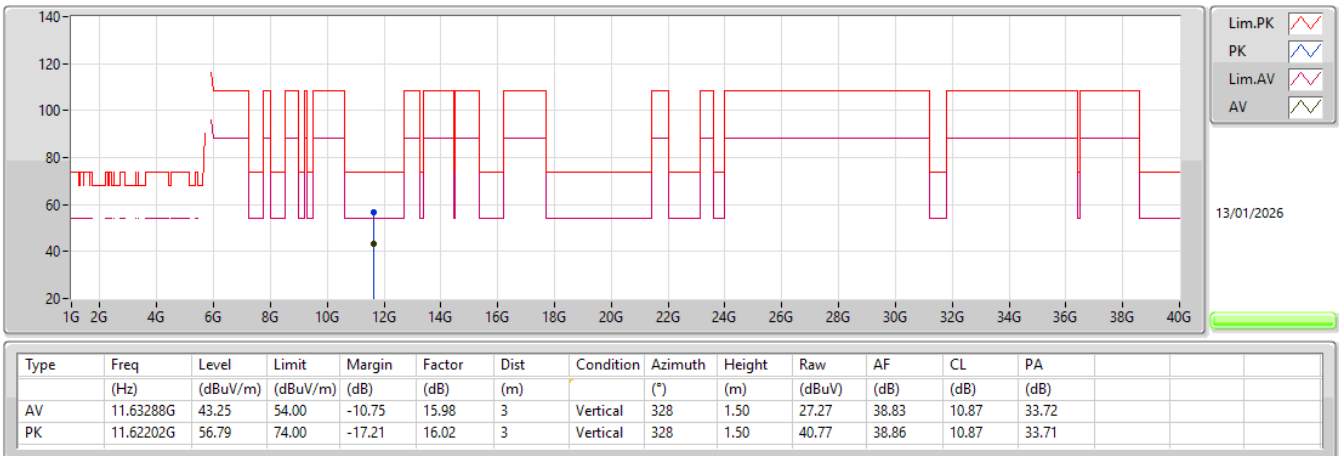

5.85-5.895GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5815MHz_TX

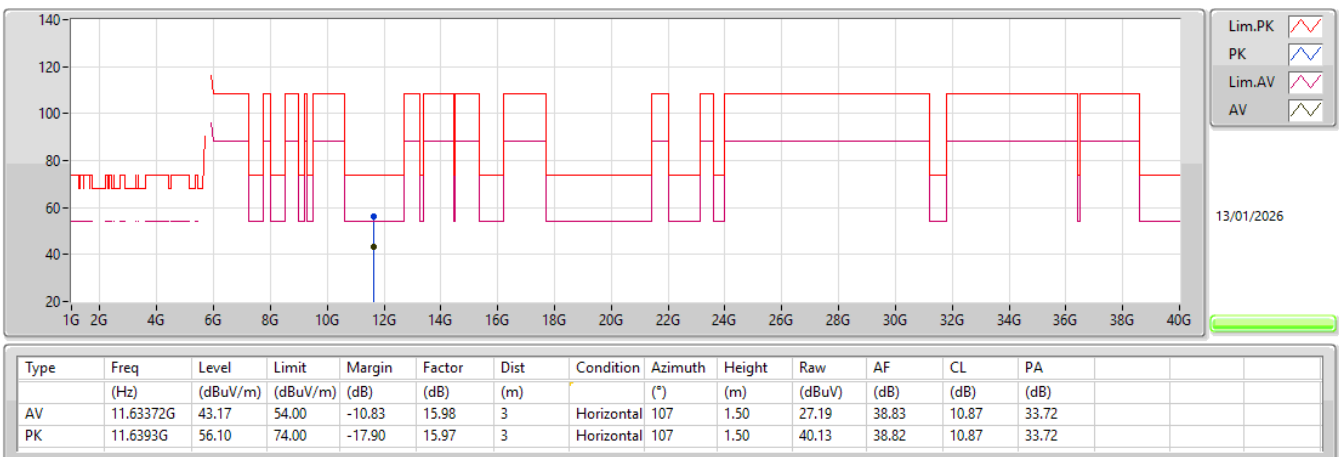




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	4.87394G	48.94	54.00	-5.06	Horizontal

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
Mode 1	Pass	AV	4.8739G	40.90	54.00	-13.10	3	Vertical	84	1.36
Mode 1	Pass	AV	4.88048G	38.14	54.00	-15.86	3	Vertical	356	1.91
Mode 1	Pass	AV	11.69444G	44.00	54.00	-10.00	3	Vertical	221	1.57
Mode 1	Pass	PK	4.87392G	48.49	74.00	-25.51	3	Vertical	84	1.36
Mode 1	Pass	PK	4.88001G	49.55	74.00	-24.45	3	Vertical	356	1.91
Mode 1	Pass	PK	11.69372G	56.17	74.00	-17.83	3	Vertical	221	1.57
Mode 1	Pass	AV	4.87394G	48.94	54.00	-5.06	3	Horizontal	7	1.43
Mode 1	Pass	AV	4.88004G	41.02	54.00	-12.98	3	Horizontal	342	1.16
Mode 1	Pass	AV	11.696G	44.09	54.00	-9.91	3	Horizontal	263	1.49
Mode 1	Pass	PK	4.87396G	54.21	74.00	-19.79	3	Horizontal	7	1.43
Mode 1	Pass	PK	4.87953G	51.30	74.00	-22.70	3	Horizontal	342	1.16
Mode 1	Pass	PK	11.7067G	56.38	74.00	-17.62	3	Horizontal	263	1.49

Radiated Emissions above 1GHz_Mode 1

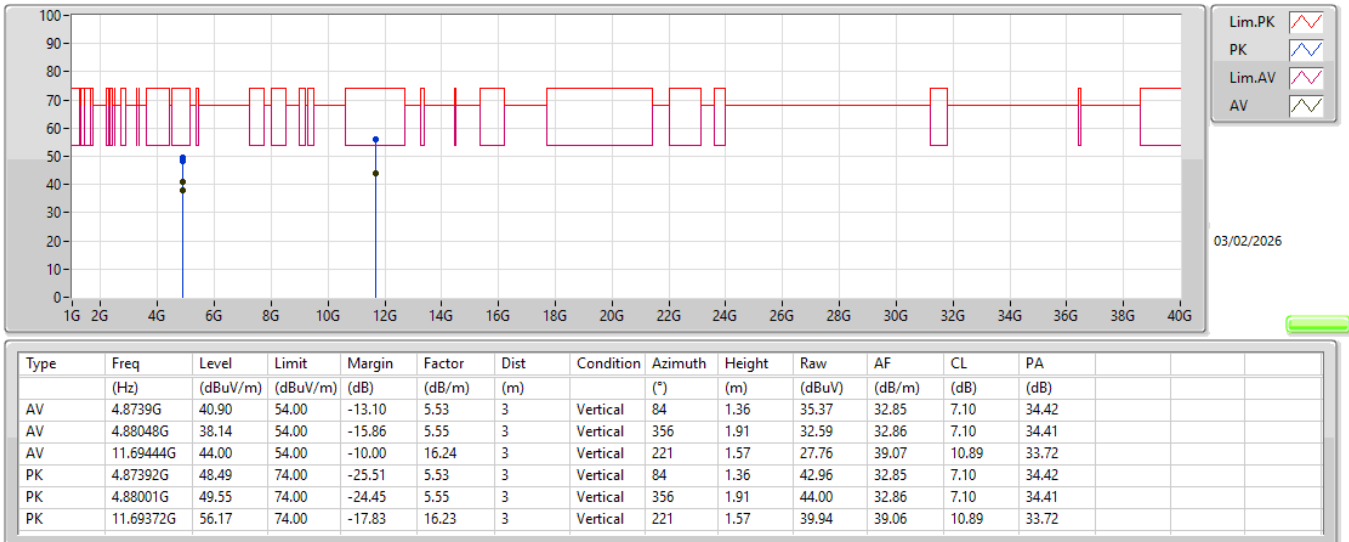

Radiated Emissions above 1GHz_Mode 1

