


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.5 PK			2.48 V	238	113.9	-3.4
2	*2462.00	100.6 AV			2.48 V	238	104.0	-3.4
3	2483.50	70.2 PK	74.0	-3.8	2.48 V	238	73.6	-3.4
4	2483.50	44.8 AV	54.0	-9.2	2.48 V	238	48.2	-3.4
5	4924.00	56.3 PK	74.0	-17.7	1.48 V	148	55.1	1.2
6	4924.00	25.2 AV	54.0	-28.8	1.48 V	148	24.0	1.2
7	7386.00	49.8 PK	74.0	-24.2	1.37 V	134	42.8	7.0
8	7386.00	35.9 AV	54.0	-18.1	1.37 V	134	28.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

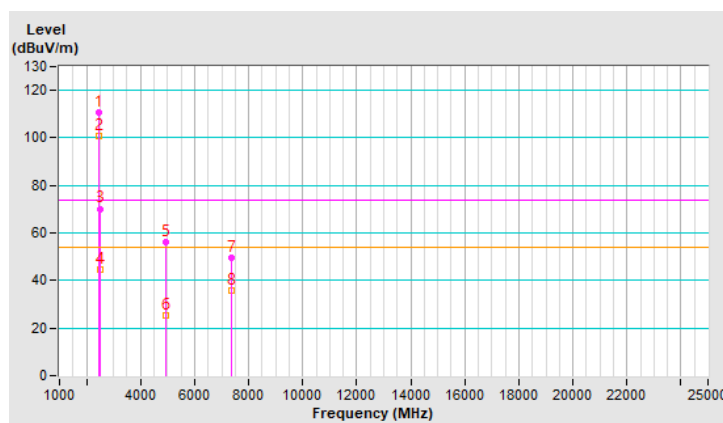


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.8 PK			1.06 H	360	114.2	-3.4
2	*2467.00	101.2 AV			1.06 H	360	104.6	-3.4
3	2483.50	72.1 PK	74.0	-1.9	1.06 H	360	75.5	-3.4
4	2483.50	47.0 AV	54.0	-7.0	1.06 H	360	50.4	-3.4
5	4934.00	47.7 PK	74.0	-26.3	1.04 H	355	46.5	1.2
6	4934.00	26.5 AV	54.0	-27.5	1.04 H	355	25.3	1.2
7	7401.00	50.5 PK	74.0	-23.5	1.01 H	344	43.5	7.0
8	7401.00	36.7 AV	54.0	-17.3	1.01 H	344	29.7	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

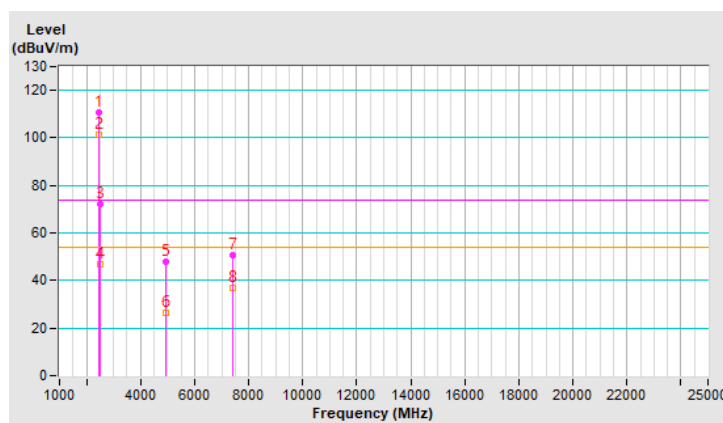


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.7 PK			2.44 V	250	113.1	-3.4
2	*2467.00	99.7 AV			2.44 V	250	103.1	-3.4
3	2483.50	71.0 PK	74.0	-3.0	2.44 V	250	74.4	-3.4
4	2483.50	45.8 AV	54.0	-8.2	2.44 V	250	49.2	-3.4
5	4934.00	46.9 PK	74.0	-27.1	1.49 V	157	45.7	1.2
6	4934.00	25.8 AV	54.0	-28.2	1.49 V	157	24.6	1.2
7	7401.00	49.4 PK	74.0	-24.6	1.45 V	138	42.4	7.0
8	7401.00	36.5 AV	54.0	-17.5	1.45 V	138	29.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

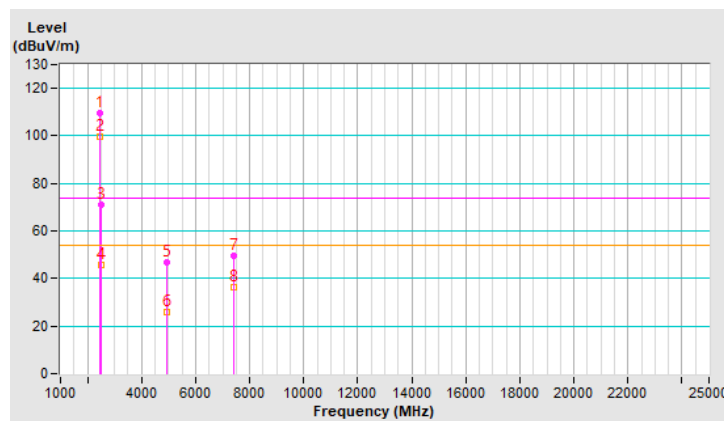


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.7 PK			1.11 H	360	110.1	-3.4
2	*2472.00	96.4 AV			1.11 H	360	99.8	-3.4
3	2483.50	72.0 PK	74.0	-2.0	1.11 H	360	75.4	-3.4
4	2483.50	48.7 AV	54.0	-5.3	1.11 H	360	52.1	-3.4
5	4944.00	47.1 PK	74.0	-26.9	1.03 H	352	45.9	1.2
6	4944.00	25.1 AV	54.0	-28.9	1.03 H	352	23.9	1.2
7	7416.00	49.2 PK	74.0	-24.8	1.07 H	344	42.0	7.2
8	7416.00	35.5 AV	54.0	-18.5	1.07 H	344	28.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

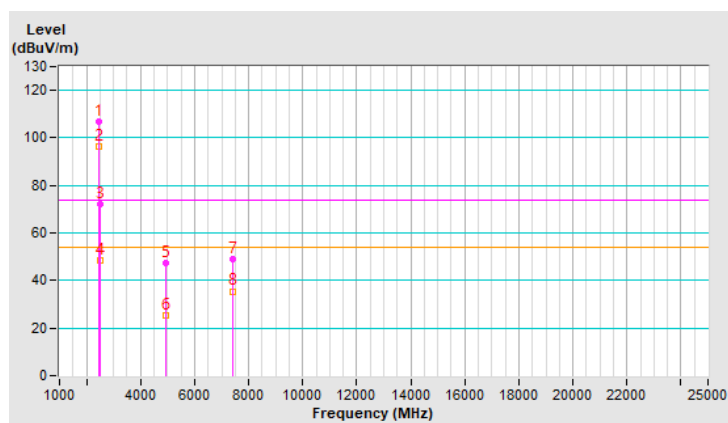


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.5 PK			2.53 V	264	107.9	-3.4
2	*2472.00	94.8 AV			2.53 V	264	98.2	-3.4
3	2483.50	70.5 PK	74.0	-3.5	2.53 V	264	73.9	-3.4
4	2483.50	47.4 AV	54.0	-6.6	2.53 V	264	50.8	-3.4
5	4944.00	46.2 PK	74.0	-27.8	1.49 V	158	45.0	1.2
6	4944.00	24.7 AV	54.0	-29.3	1.49 V	158	23.5	1.2
7	7416.00	48.7 PK	74.0	-25.3	1.45 V	143	41.5	7.2
8	7416.00	34.6 AV	54.0	-19.4	1.45 V	143	27.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

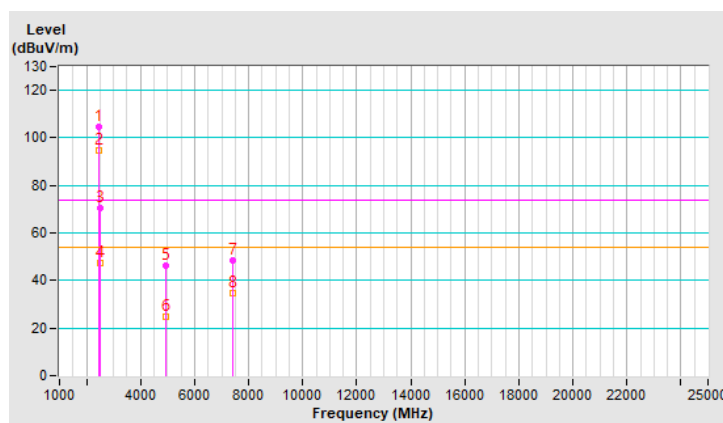


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	1.02 H	343	75.5	-3.4
2	2390.00	47.1 AV	54.0	-6.9	1.02 H	343	50.5	-3.4
3	*2412.00	112.9 PK			1.02 H	343	116.3	-3.4
4	*2412.00	102.9 AV			1.02 H	343	106.3	-3.4
5	4824.00	48.4 PK	74.0	-25.6	1.00 H	318	47.1	1.3
6	4824.00	27.1 AV	54.0	-26.9	1.00 H	318	25.8	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

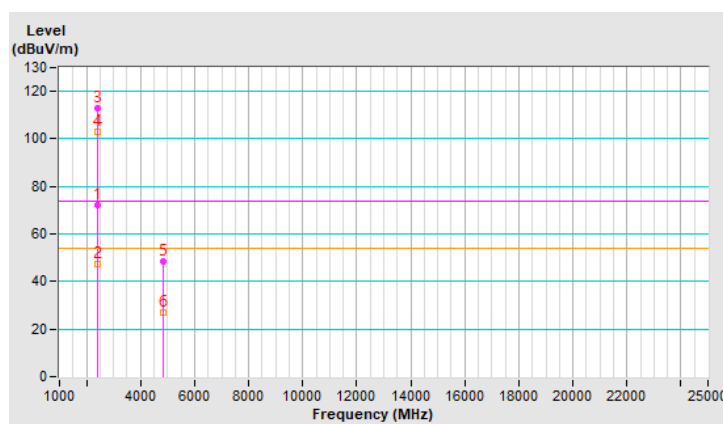


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	2.55 V	261	72.9	-3.4
2	2390.00	44.9 AV	54.0	-9.1	2.55 V	261	48.3	-3.4
3	*2412.00	110.6 PK			2.55 V	261	114.0	-3.4
4	*2412.00	100.7 AV			2.55 V	261	104.1	-3.4
5	4824.00	47.1 PK	74.0	-26.9	1.47 V	134	45.8	1.3
6	4824.00	25.7 AV	54.0	-28.3	1.47 V	134	24.4	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

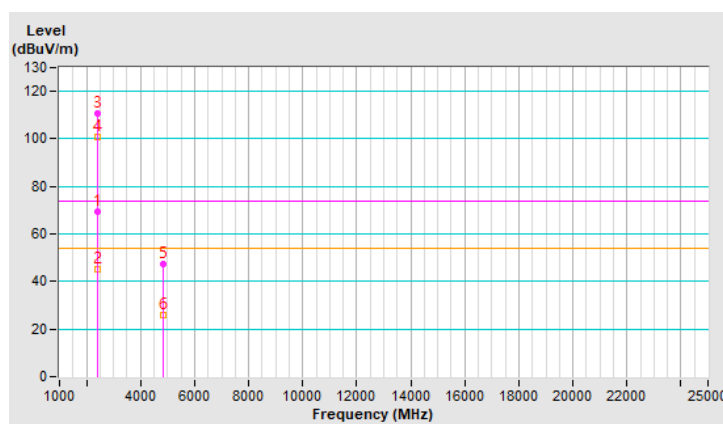


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.09 H	357	63.9	-3.4
2	2390.00	40.3 AV	54.0	-13.7	1.09 H	357	43.7	-3.4
3	*2437.00	115.2 PK			1.09 H	357	118.6	-3.4
4	*2437.00	105.5 AV			1.09 H	357	108.9	-3.4
5	2483.50	66.4 PK	74.0	-7.6	1.09 H	357	69.8	-3.4
6	2483.50	39.5 AV	54.0	-14.5	1.09 H	357	42.9	-3.4
7	4874.00	50.2 PK	74.0	-23.8	1.01 H	343	48.9	1.3
8	4874.00	29.0 AV	54.0	-25.0	1.01 H	343	27.7	1.3
9	7311.00	54.8 PK	74.0	-19.2	1.03 H	315	47.8	7.0
10	7311.00	40.8 AV	54.0	-13.2	1.03 H	315	33.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

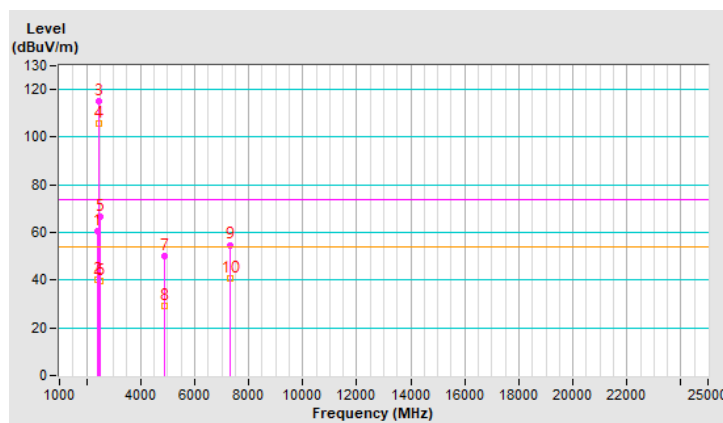


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	2.59 V	262	61.3	-3.4
2	2390.00	38.0 AV	54.0	-16.0	2.59 V	262	41.4	-3.4
3	*2437.00	113.0 PK			2.59 V	262	116.4	-3.4
4	*2437.00	103.4 AV			2.59 V	262	106.8	-3.4
5	2483.50	64.4 PK	74.0	-9.6	2.59 V	262	67.8	-3.4
6	2483.50	37.5 AV	54.0	-16.5	2.59 V	262	40.9	-3.4
7	4874.00	49.0 PK	74.0	-25.0	1.68 V	155	47.7	1.3
8	4874.00	28.0 AV	54.0	-26.0	1.68 V	155	26.7	1.3
9	7311.00	53.7 PK	74.0	-20.3	1.54 V	141	46.7	7.0
10	7311.00	39.9 AV	54.0	-14.1	1.54 V	141	32.9	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

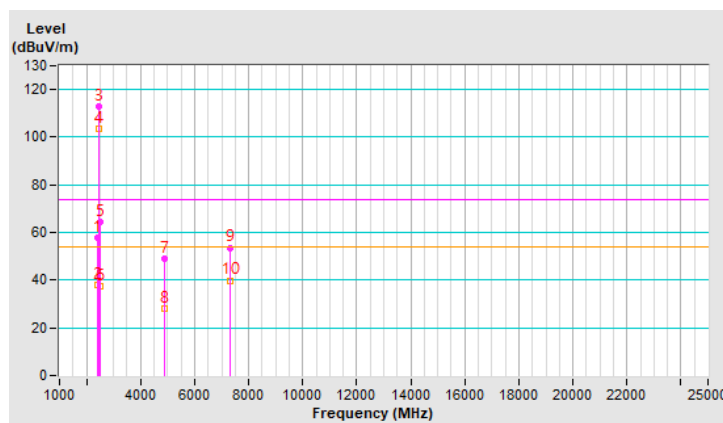


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.2 PK			1.01 H	359	114.6	-3.4
2	*2462.00	101.0 AV			1.01 H	359	104.4	-3.4
3	2483.50	72.3 PK	74.0	-1.7	1.01 H	359	75.7	-3.4
4	2483.50	51.4 AV	54.0	-2.6	1.01 H	359	54.8	-3.4
5	4924.00	49.1 PK	74.0	-24.9	1.04 H	325	47.9	1.2
6	4924.00	27.6 AV	54.0	-26.4	1.04 H	325	26.4	1.2
7	7386.00	53.2 PK	74.0	-20.8	1.04 H	327	46.2	7.0
8	7386.00	38.4 AV	54.0	-15.6	1.04 H	327	31.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

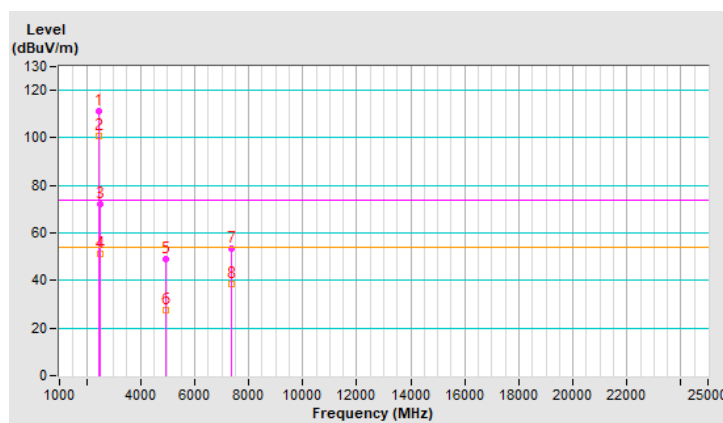


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.2 PK			2.53 V	245	112.6	-3.4
2	*2462.00	99.2 AV			2.53 V	245	102.6	-3.4
3	2483.50	70.2 PK	74.0	-3.8	2.53 V	245	73.6	-3.4
4	2483.50	49.2 AV	54.0	-4.8	2.53 V	245	52.6	-3.4
5	4924.00	47.6 PK	74.0	-26.4	1.50 V	165	46.4	1.2
6	4924.00	26.6 AV	54.0	-27.4	1.50 V	165	25.4	1.2
7	7386.00	52.1 PK	74.0	-21.9	1.53 V	168	45.1	7.0
8	7386.00	37.0 AV	54.0	-17.0	1.53 V	168	30.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

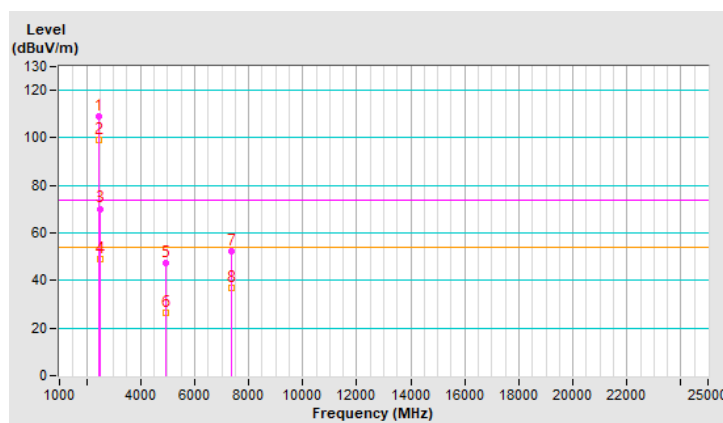


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.3 PK			1.09 H	346	114.7	-3.4
2	*2467.00	100.6 AV			1.09 H	346	104.0	-3.4
3	2483.50	72.4 PK	74.0	-1.6	1.09 H	346	75.8	-3.4
4	2483.50	48.7 AV	54.0	-5.3	1.09 H	346	52.1	-3.4
5	4934.00	48.3 PK	74.0	-25.7	1.00 H	316	47.1	1.2
6	4934.00	27.1 AV	54.0	-26.9	1.00 H	316	25.9	1.2
7	7401.00	52.9 PK	74.0	-21.1	1.01 H	333	45.9	7.0
8	7401.00	38.0 AV	54.0	-16.0	1.01 H	333	31.0	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

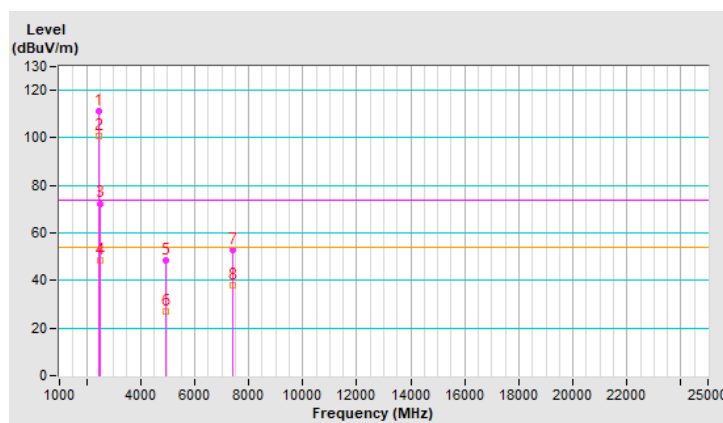


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.0 PK			2.57 V	243	111.4	-3.4
2	*2467.00	98.1 AV			2.57 V	243	101.5	-3.4
3	2483.50	70.3 PK	74.0	-3.7	2.57 V	243	73.7	-3.4
4	2483.50	46.5 AV	54.0	-7.5	2.57 V	243	49.9	-3.4
5	4934.00	47.3 PK	74.0	-26.7	1.60 V	157	46.1	1.2
6	4934.00	26.5 AV	54.0	-27.5	1.60 V	157	25.3	1.2
7	7401.00	52.3 PK	74.0	-21.7	1.63 V	147	45.3	7.0
8	7401.00	37.2 AV	54.0	-16.8	1.63 V	147	30.2	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

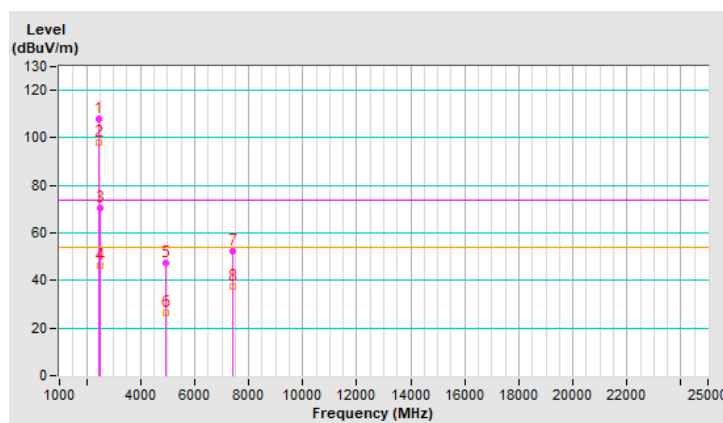


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.3 PK			1.13 H	359	107.7	-3.4
2	*2472.00	94.1 AV			1.13 H	359	97.5	-3.4
3	2483.50	70.9 PK	74.0	-3.1	1.13 H	359	74.3	-3.4
4	2483.50	52.3 AV	54.0	-1.7	1.13 H	359	55.7	-3.4
5	4944.00	47.7 PK	74.0	-26.3	1.06 H	333	46.5	1.2
6	4944.00	26.1 AV	54.0	-27.9	1.06 H	333	24.9	1.2
7	7416.00	52.4 PK	74.0	-21.6	1.02 H	354	45.2	7.2
8	7416.00	37.8 AV	54.0	-16.2	1.02 H	354	30.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

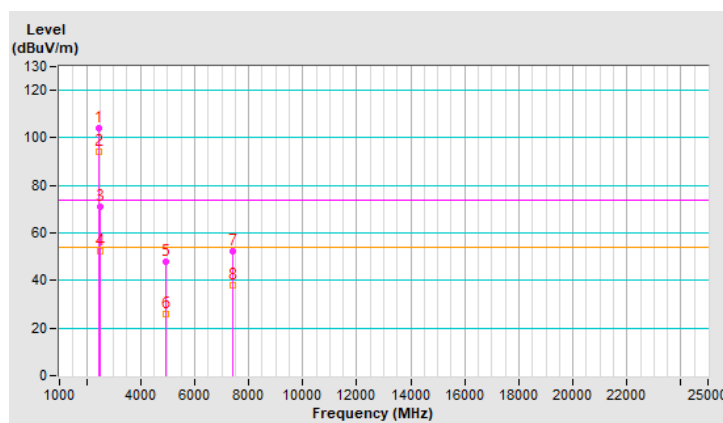


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	100.4 PK			2.54 V	258	103.8	-3.4
2	*2472.00	91.3 AV			2.54 V	258	94.7	-3.4
3	2483.50	70.0 PK	74.0	-4.0	2.54 V	258	73.4	-3.4
4	2483.50	50.7 AV	54.0	-3.3	2.54 V	258	54.1	-3.4
5	4944.00	46.5 PK	74.0	-27.5	1.52 V	160	45.3	1.2
6	4944.00	24.9 AV	54.0	-29.1	1.52 V	160	23.7	1.2
7	7416.00	51.3 PK	74.0	-22.7	1.59 V	163	44.1	7.2
8	7416.00	37.3 AV	54.0	-16.7	1.59 V	163	30.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

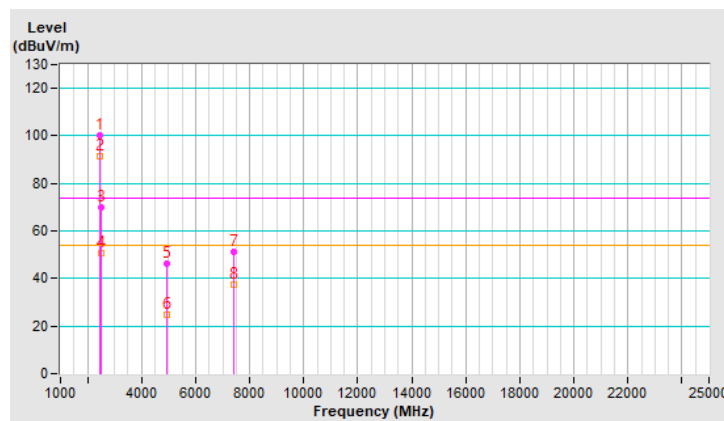


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.13 H	354	74.8	-3.4
2	2390.00	52.5 AV	54.0	-1.5	1.13 H	354	55.9	-3.4
3	*2412.00	111.1 PK			1.13 H	354	114.5	-3.4
4	*2412.00	100.2 AV			1.13 H	354	103.6	-3.4
5	4824.00	41.6 PK	74.0	-32.4	1.03 H	328	40.3	1.3
6	4824.00	29.7 AV	54.0	-24.3	1.03 H	328	28.4	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

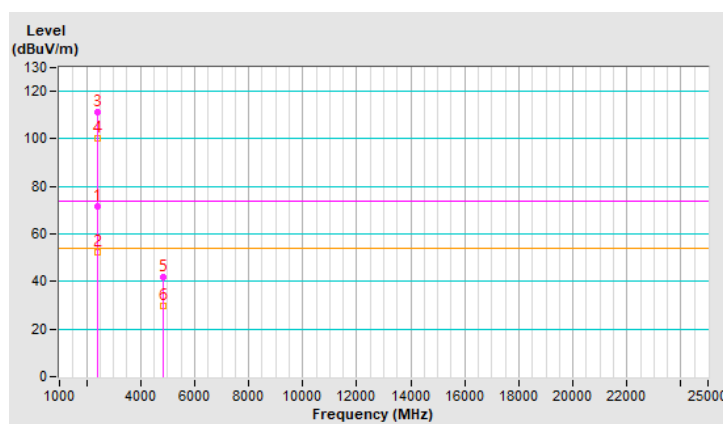


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.3 PK	74.0	-4.7	2.56 V	252	72.7	-3.4
2	2390.00	49.3 AV	54.0	-4.7	2.56 V	252	52.7	-3.4
3	*2412.00	109.2 PK			2.56 V	252	112.6	-3.4
4	*2412.00	98.1 AV			2.56 V	252	101.5	-3.4
5	4824.00	39.6 PK	74.0	-34.4	1.59 V	177	38.3	1.3
6	4824.00	27.8 AV	54.0	-26.2	1.59 V	177	26.5	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

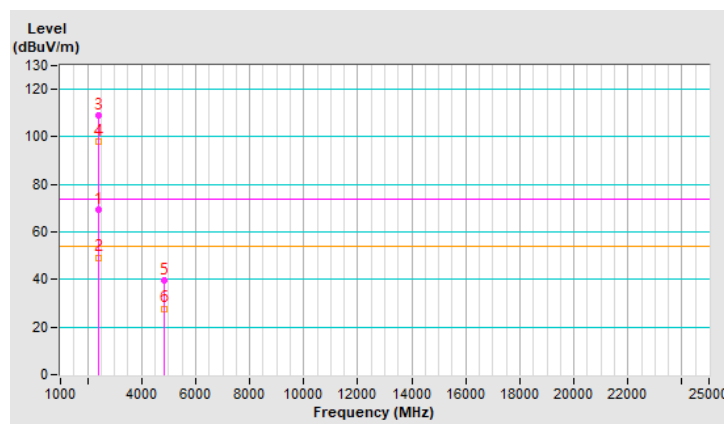


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.0 PK	74.0	-14.0	1.12 H	355	63.4	-3.4
2	2390.00	41.6 AV	54.0	-12.4	1.12 H	355	45.0	-3.4
3	*2437.00	114.0 PK			1.12 H	355	117.4	-3.4
4	*2437.00	104.3 AV			1.12 H	355	107.7	-3.4
5	2483.50	63.5 PK	74.0	-10.5	1.12 H	355	66.9	-3.4
6	2483.50	41.7 AV	54.0	-12.3	1.12 H	355	45.1	-3.4
7	4874.00	50.1 PK	74.0	-23.9	1.00 H	333	48.8	1.3
8	4874.00	29.8 AV	54.0	-24.2	1.00 H	333	28.5	1.3
9	7311.00	54.2 PK	74.0	-19.8	1.02 H	321	47.2	7.0
10	7311.00	40.4 AV	54.0	-13.6	1.02 H	321	33.4	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

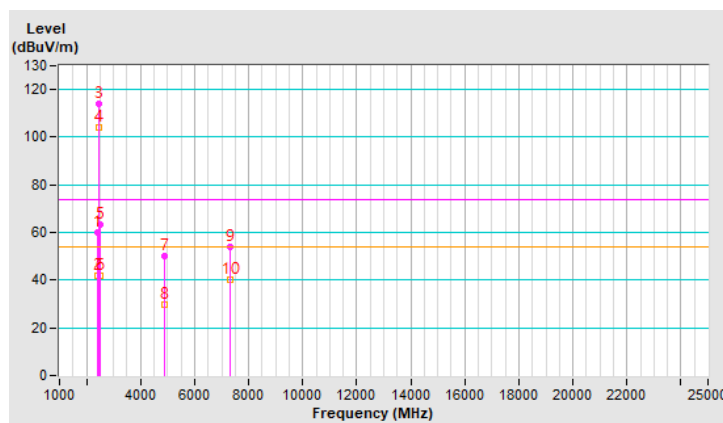


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.3 PK	74.0	-15.7	2.54 V	208	61.7	-3.4
2	2390.00	39.4 AV	54.0	-14.6	2.54 V	208	42.8	-3.4
3	*2437.00	112.1 PK			2.54 V	208	115.5	-3.4
4	*2437.00	102.4 AV			2.54 V	208	105.8	-3.4
5	2483.50	61.3 PK	74.0	-12.7	2.54 V	208	64.7	-3.4
6	2483.50	39.4 AV	54.0	-14.6	2.54 V	208	42.8	-3.4
7	4874.00	49.3 PK	74.0	-24.7	1.54 V	341	48.0	1.3
8	4874.00	28.4 AV	54.0	-25.6	1.54 V	341	27.1	1.3
9	7311.00	53.4 PK	74.0	-20.6	1.66 V	333	46.4	7.0
10	7311.00	39.6 AV	54.0	-14.4	1.66 V	333	32.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

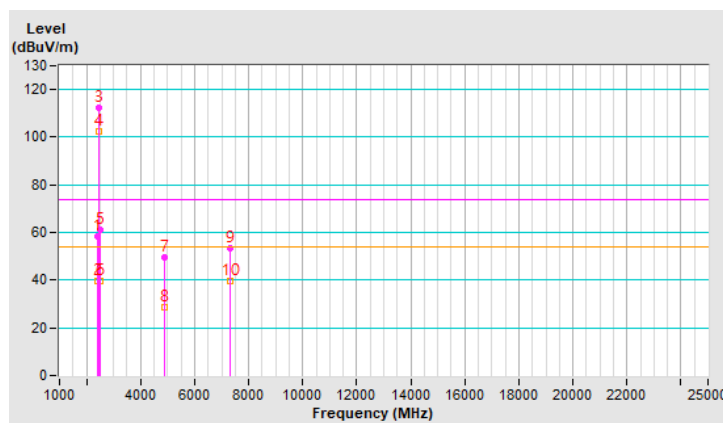


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.9 PK			1.04 H	346	112.3	-3.4
2	*2462.00	99.1 AV			1.04 H	346	102.5	-3.4
3	2483.50	72.2 PK	74.0	-1.8	1.04 H	346	75.6	-3.4
4	2483.50	51.5 AV	54.0	-2.5	1.04 H	346	54.9	-3.4
5	4924.00	48.1 PK	74.0	-25.9	1.04 H	336	46.9	1.2
6	4924.00	27.0 AV	54.0	-27.0	1.04 H	336	25.8	1.2
7	7386.00	52.9 PK	74.0	-21.1	1.03 H	351	45.9	7.0
8	7386.00	38.8 AV	54.0	-15.2	1.03 H	351	31.8	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

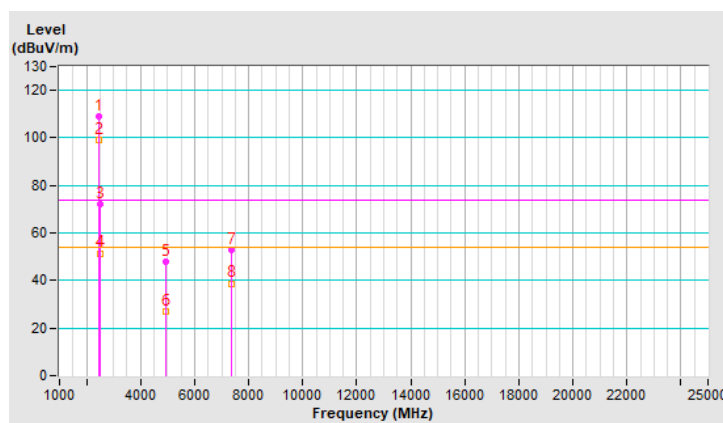


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.8 PK			2.69 V	263	111.2	-3.4
2	*2462.00	97.6 AV			2.69 V	263	101.0	-3.4
3	2483.50	70.5 PK	74.0	-3.5	2.69 V	263	73.9	-3.4
4	2483.50	49.5 AV	54.0	-4.5	2.69 V	263	52.9	-3.4
5	4924.00	47.3 PK	74.0	-26.7	1.68 V	156	46.1	1.2
6	4924.00	26.0 AV	54.0	-28.0	1.68 V	156	24.8	1.2
7	7386.00	50.9 PK	74.0	-23.1	1.50 V	170	43.9	7.0
8	7386.00	37.3 AV	54.0	-16.7	1.50 V	170	30.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

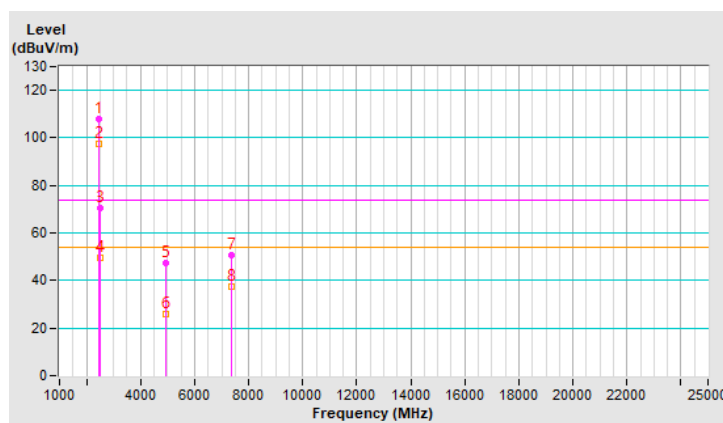


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.3 PK			1.02 H	339	111.7	-3.4
2	*2467.00	98.1 AV			1.02 H	339	101.5	-3.4
3	2483.50	71.9 PK	74.0	-2.1	1.02 H	339	75.3	-3.4
4	2483.50	51.6 AV	54.0	-2.4	1.02 H	339	55.0	-3.4
5	4934.00	48.4 PK	74.0	-25.6	1.00 H	348	47.2	1.2
6	4934.00	27.2 AV	54.0	-26.8	1.00 H	348	26.0	1.2
7	7401.00	52.8 PK	74.0	-21.2	1.00 H	357	45.8	7.0
8	7401.00	38.5 AV	54.0	-15.5	1.00 H	357	31.5	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

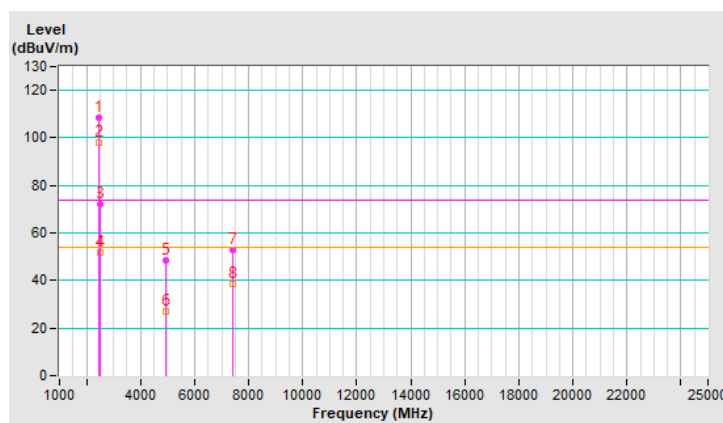


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.5 PK			2.56 V	239	109.9	-3.4
2	*2467.00	96.8 AV			2.56 V	239	100.2	-3.4
3	2483.50	69.9 PK	74.0	-4.1	2.56 V	239	73.3	-3.4
4	2483.50	49.2 AV	54.0	-4.8	2.56 V	239	52.6	-3.4
5	4934.00	47.1 PK	74.0	-26.9	1.61 V	163	45.9	1.2
6	4934.00	26.3 AV	54.0	-27.7	1.61 V	163	25.1	1.2
7	7401.00	51.8 PK	74.0	-22.2	1.50 V	137	44.8	7.0
8	7401.00	37.3 AV	54.0	-16.7	1.50 V	137	30.3	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

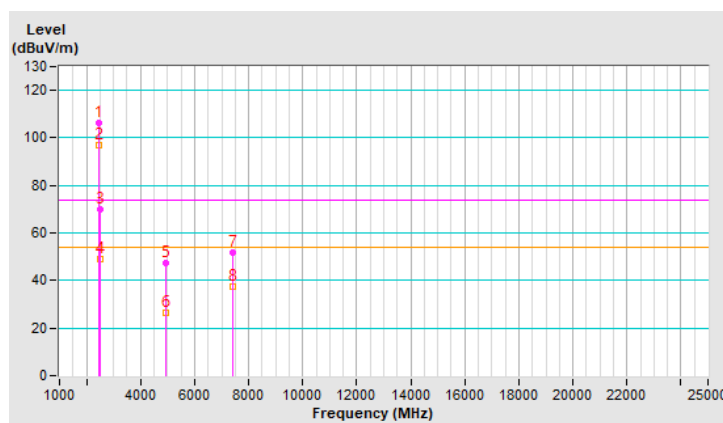


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.9 PK			1.01 H	353	105.3	-3.4
2	*2472.00	91.9 AV			1.01 H	353	95.3	-3.4
3	2483.50	71.8 PK	74.0	-2.2	1.01 H	353	75.2	-3.4
4	2483.50	52.0 AV	54.0	-2.0	1.01 H	353	55.4	-3.4
5	4944.00	48.0 PK	74.0	-26.0	1.05 H	337	46.8	1.2
6	4944.00	27.0 AV	54.0	-27.0	1.05 H	337	25.8	1.2
7	7416.00	50.5 PK	74.0	-23.5	1.04 H	345	43.3	7.2
8	7416.00	36.8 AV	54.0	-17.2	1.04 H	345	29.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

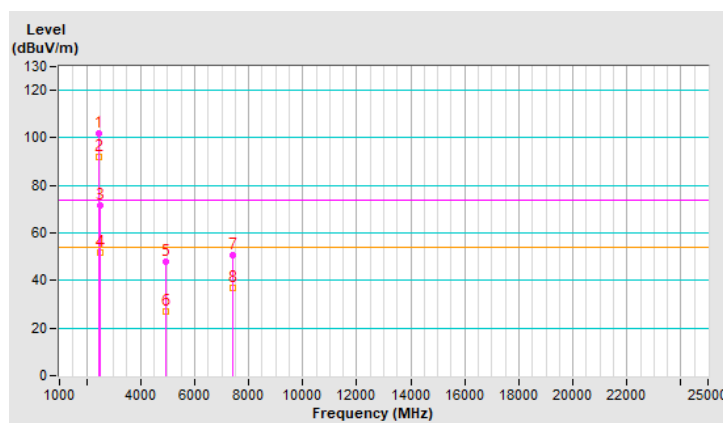


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	100.8 PK			2.58 V	249	104.2	-3.4
2	*2472.00	91.4 AV			2.58 V	249	94.8	-3.4
3	2483.50	66.2 PK	74.0	-7.8	2.58 V	249	69.6	-3.4
4	2483.50	52.4 AV	54.0	-1.6	2.58 V	249	55.8	-3.4
5	4944.00	47.5 PK	74.0	-26.5	1.64 V	170	46.3	1.2
6	4944.00	26.5 AV	54.0	-27.5	1.64 V	170	25.3	1.2
7	7416.00	50.5 PK	74.0	-23.5	1.55 V	160	43.3	7.2
8	7416.00	36.4 AV	54.0	-17.6	1.55 V	160	29.2	7.2


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

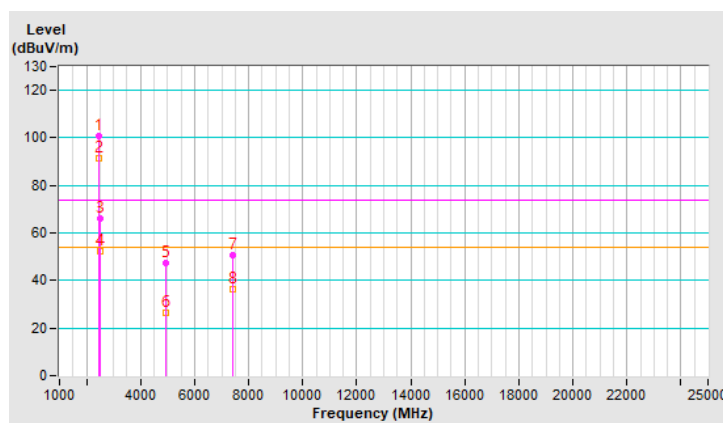


Plot of Band Edge Mode A


802.11b Channel 1

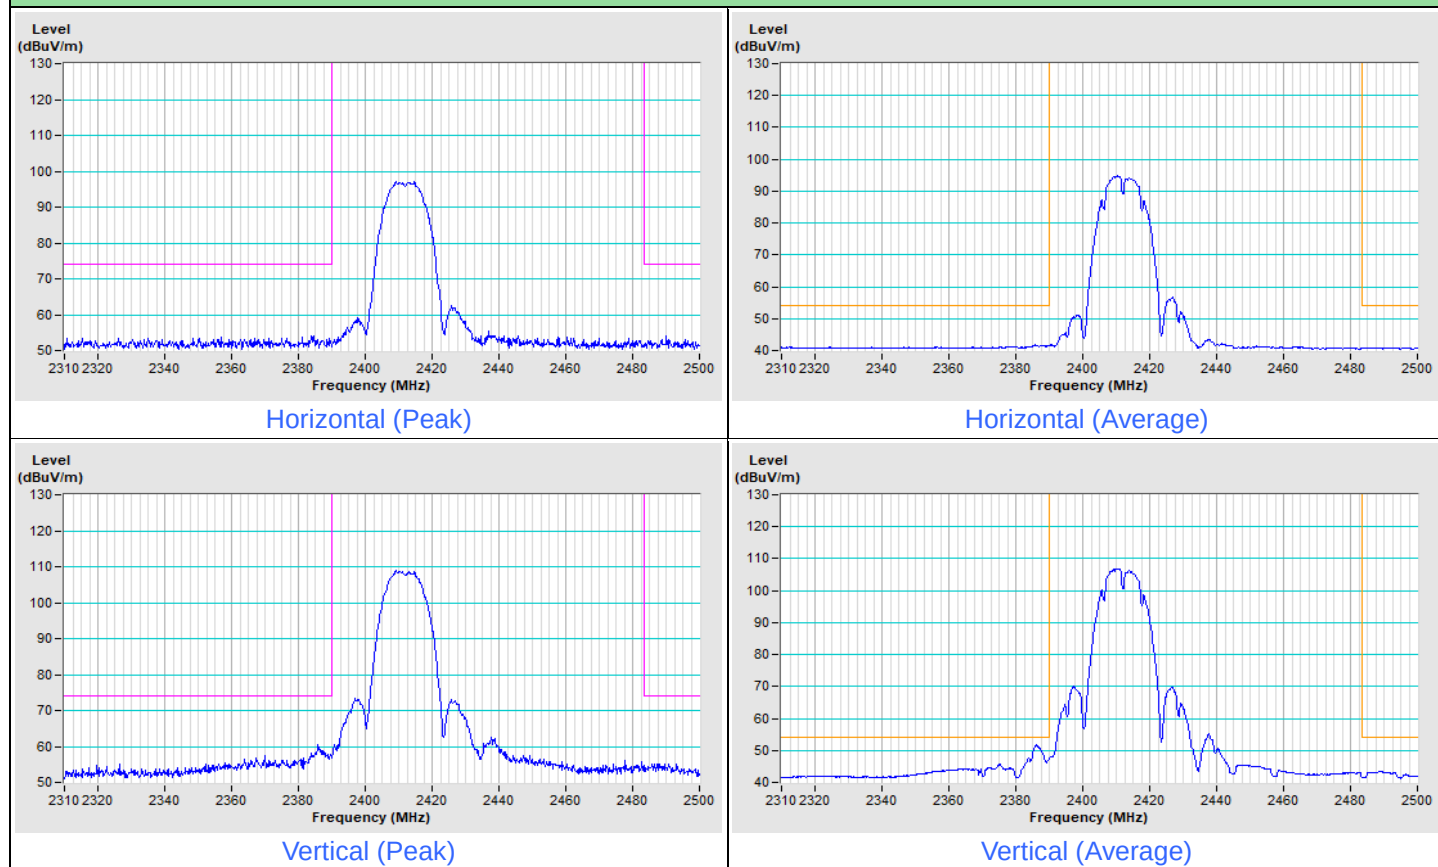


802.11b Channel 11

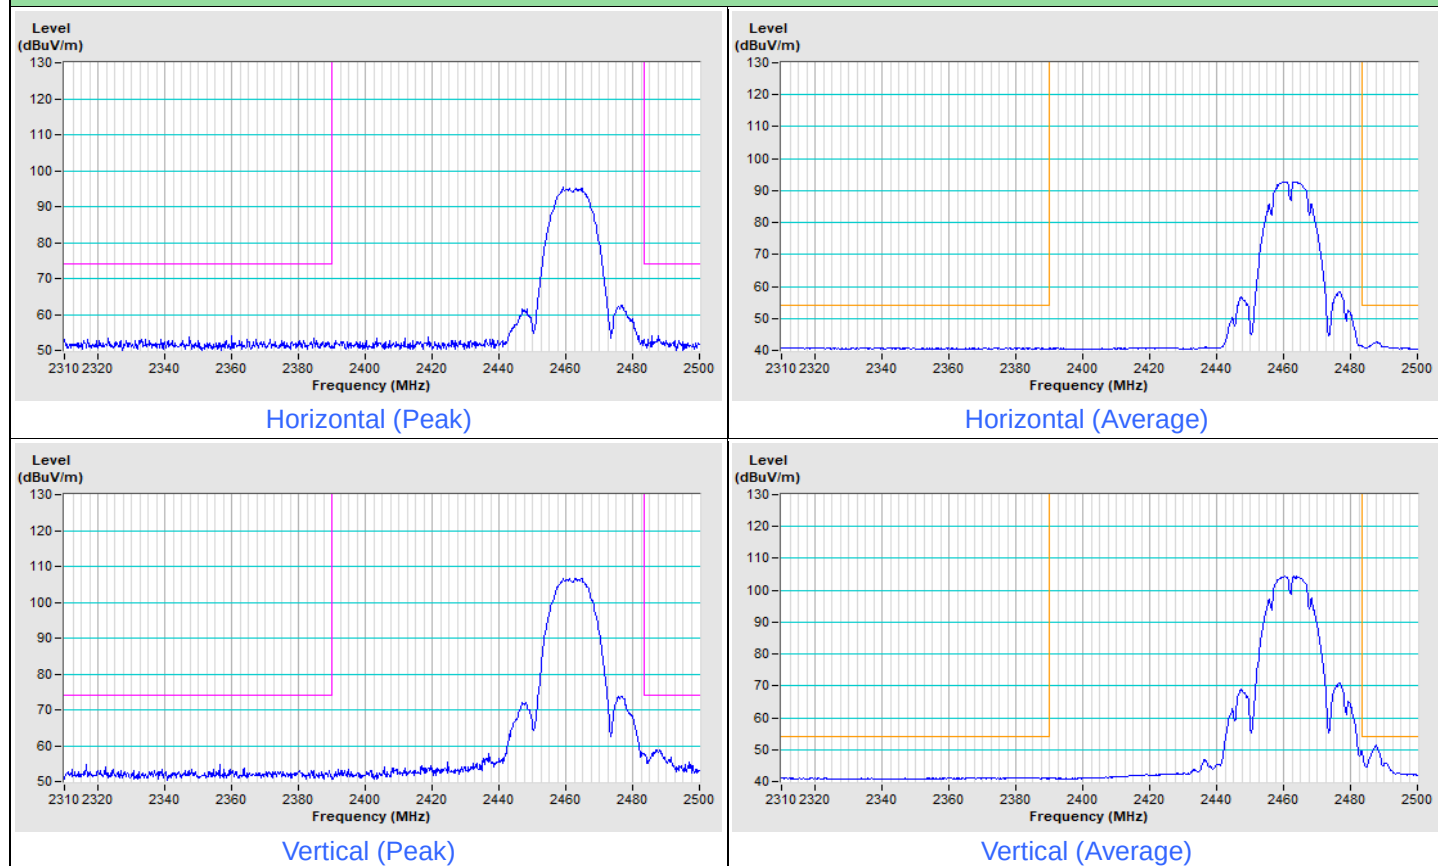


802.11b Channel 12

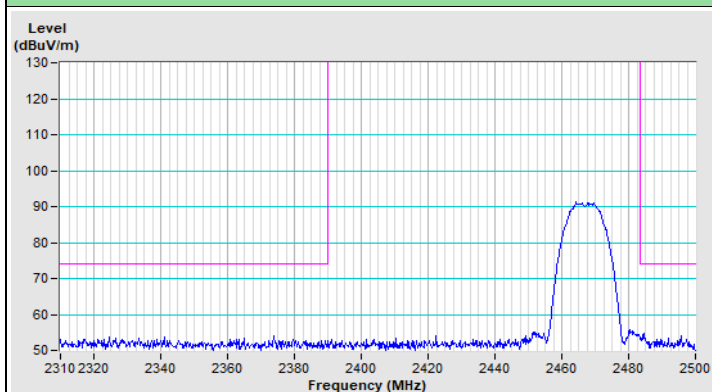


Horizontal (Peak)

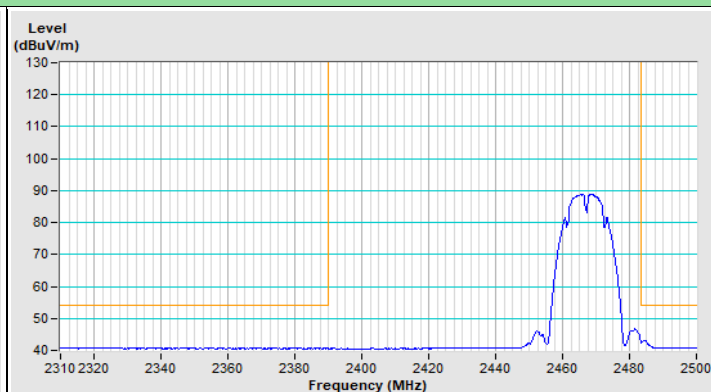

Horizontal (Average)

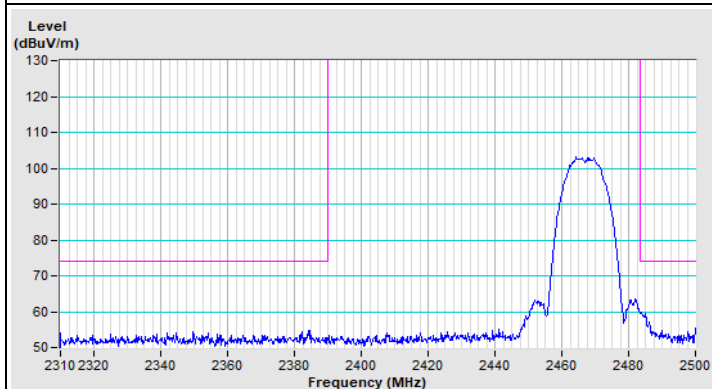


Vertical (Peak)

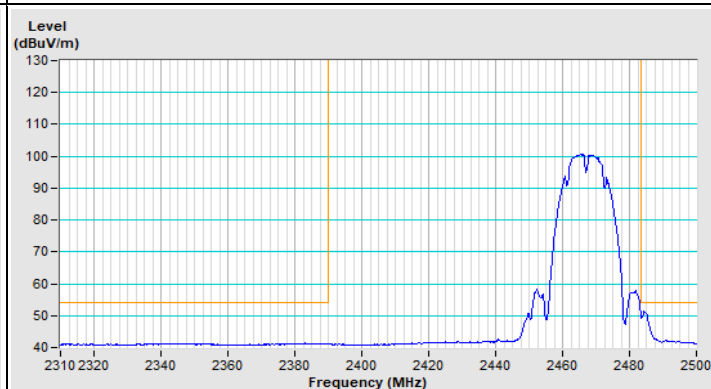


Vertical (Average)


802.11b Channel 13

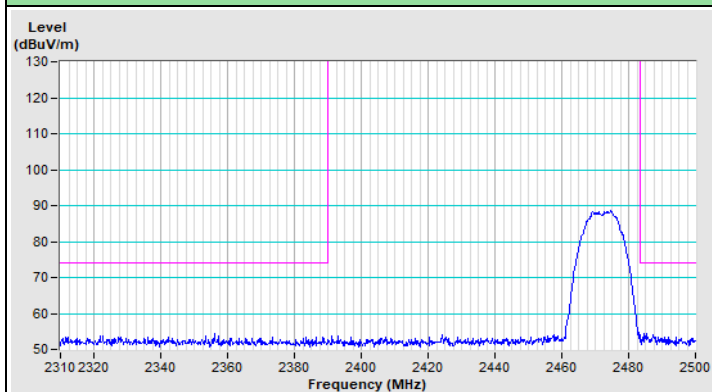


Horizontal (Peak)

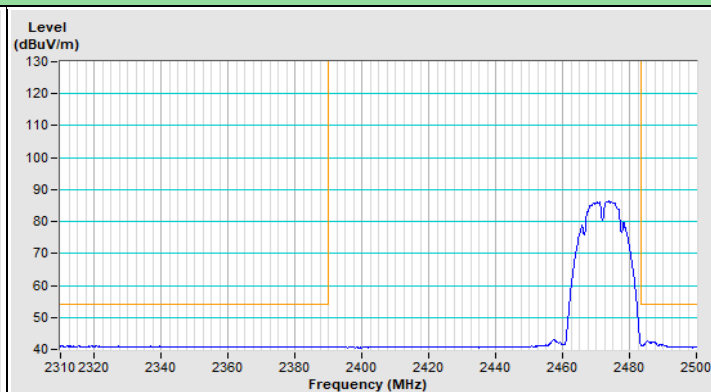

Horizontal (Average)

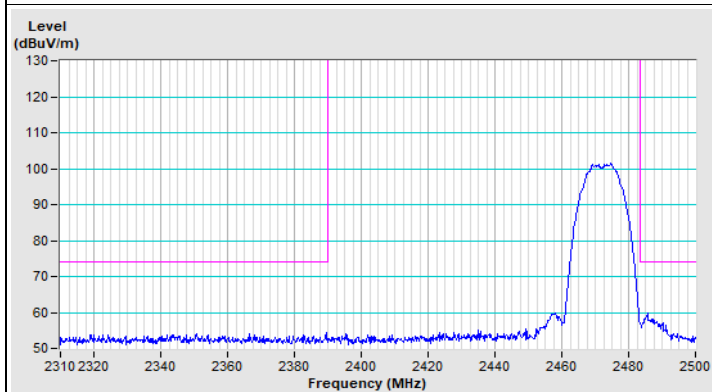


Vertical (Peak)

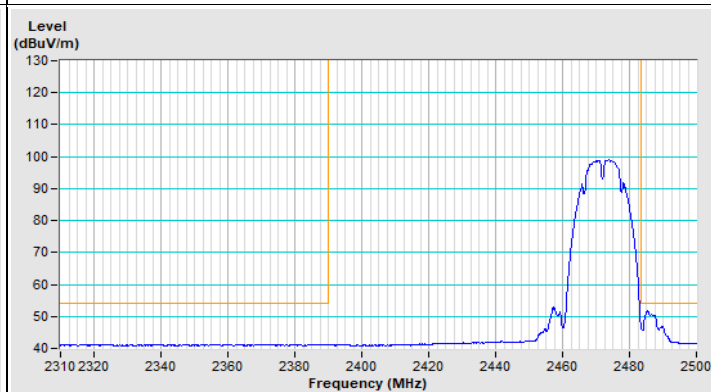


Vertical (Average)


802.11g Channel 1

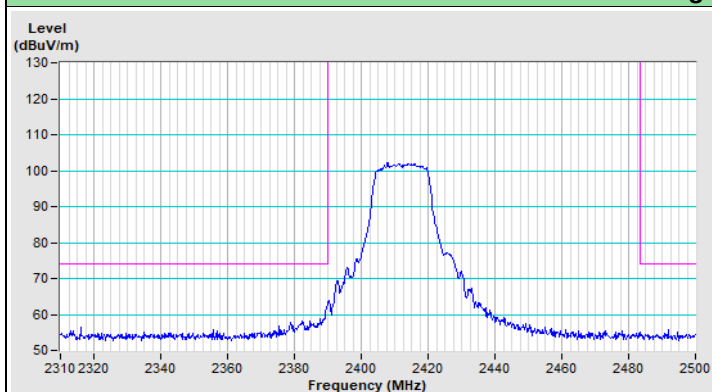


Horizontal (Peak)

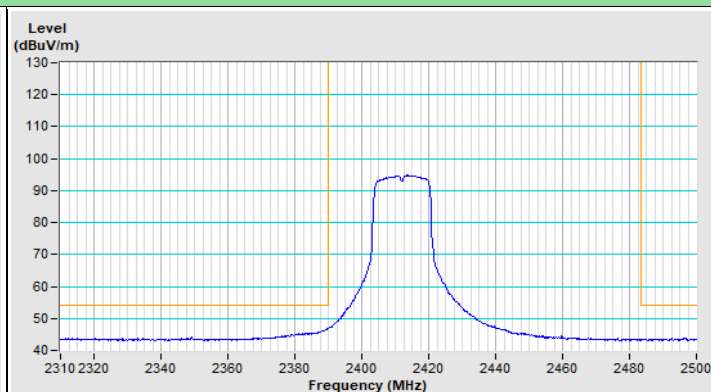

Horizontal (Average)

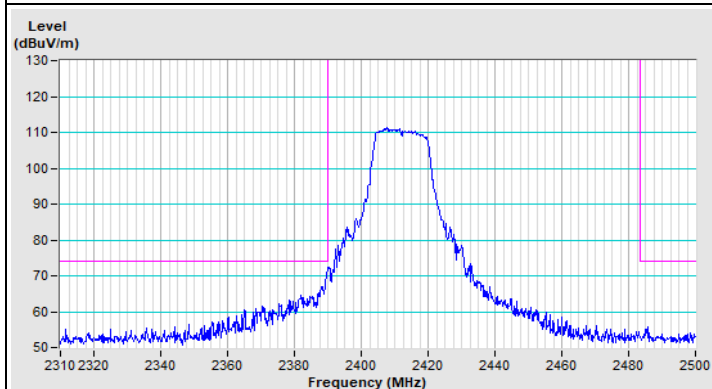


Vertical (Peak)

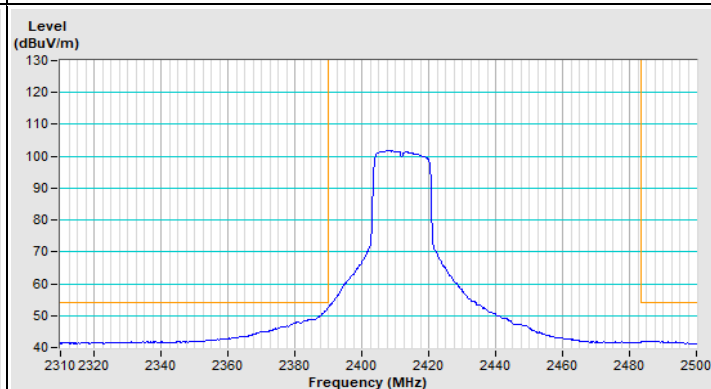


Vertical (Average)


802.11g Channel 11

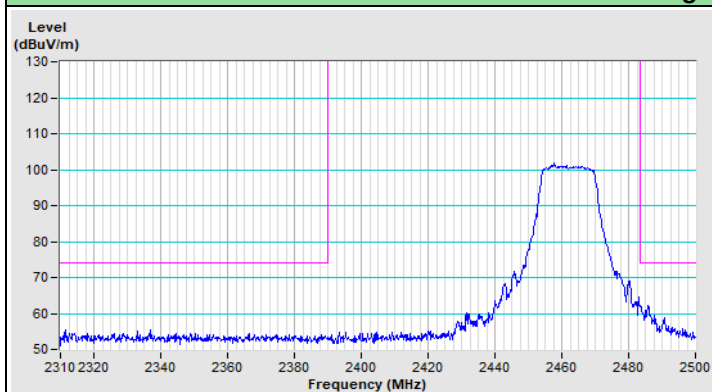


Horizontal (Peak)

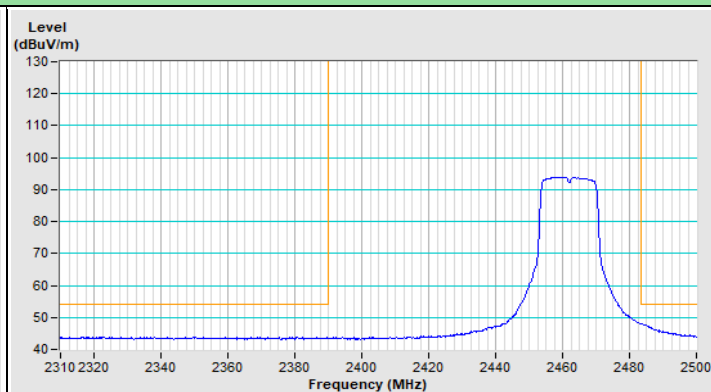

Horizontal (Average)

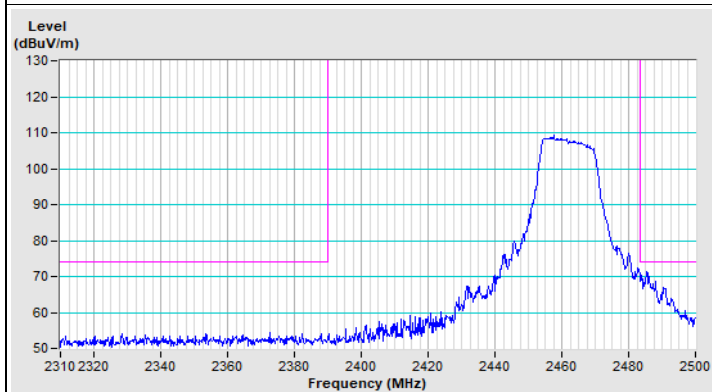


Vertical (Peak)

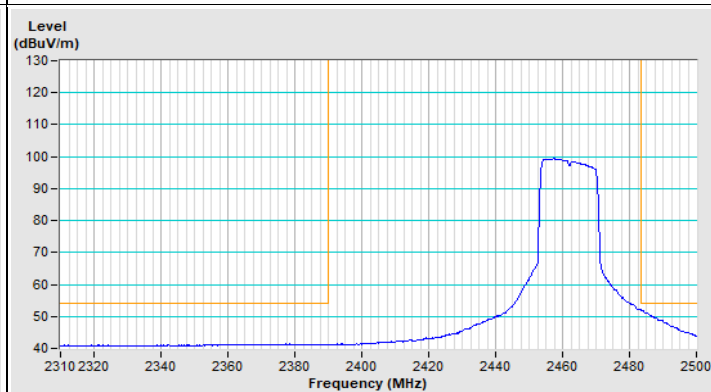


Vertical (Average)


802.11g Channel 12

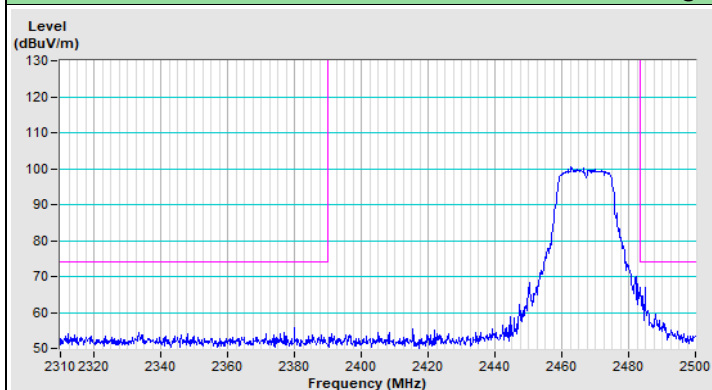


Horizontal (Peak)

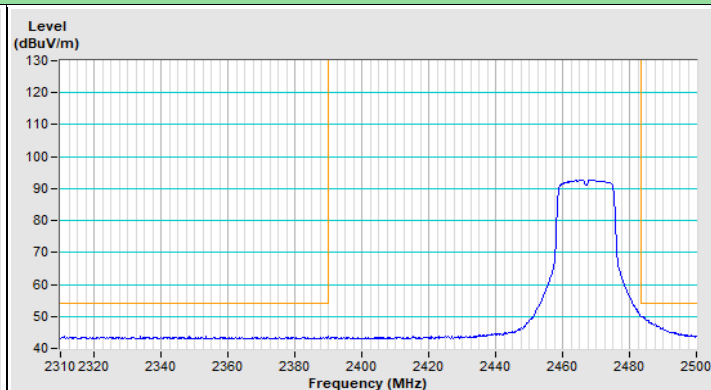

Horizontal (Average)

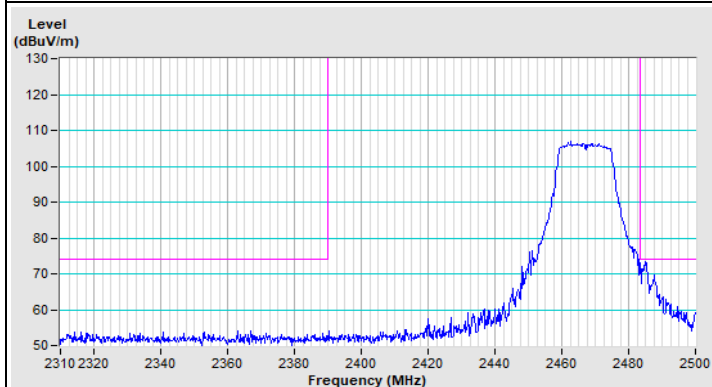


Vertical (Peak)

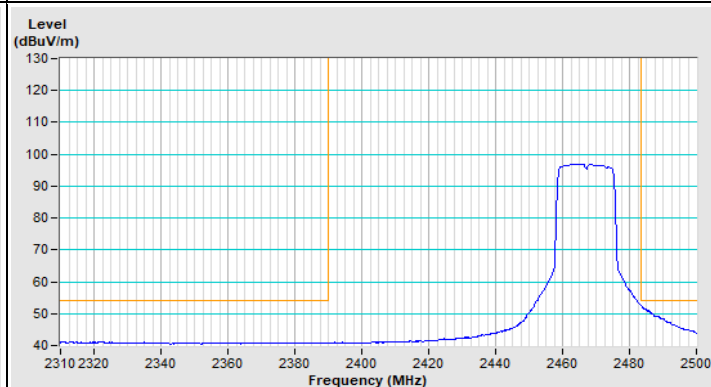


Vertical (Average)


802.11g Channel 13

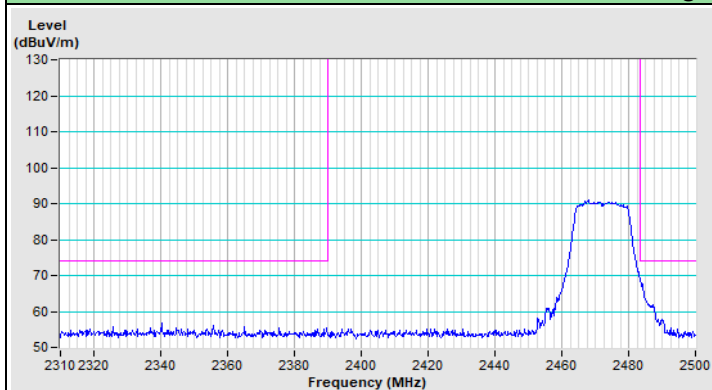


Horizontal (Peak)

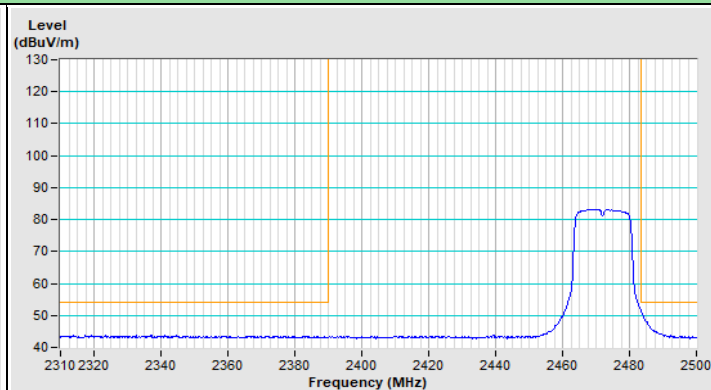

Horizontal (Average)

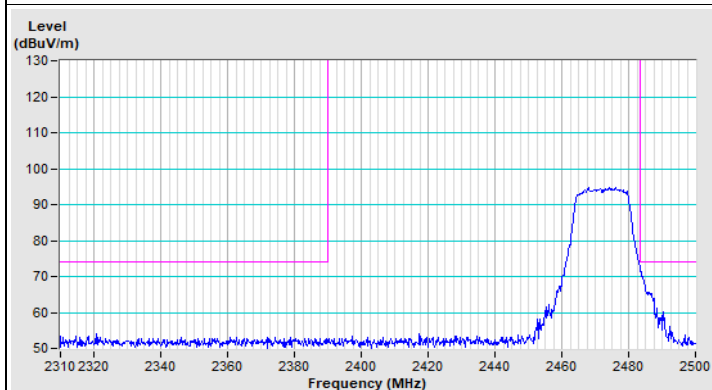


Vertical (Peak)

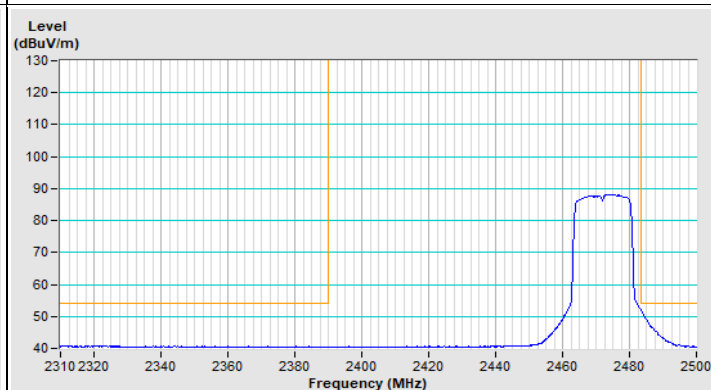


Vertical (Average)


802.11ax (HE20) Channel 1

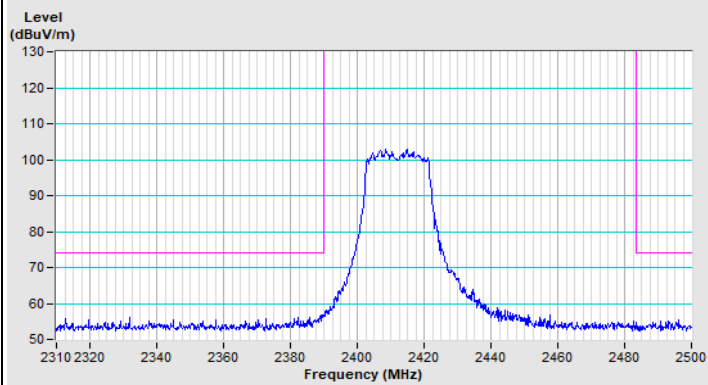


Horizontal (Peak)

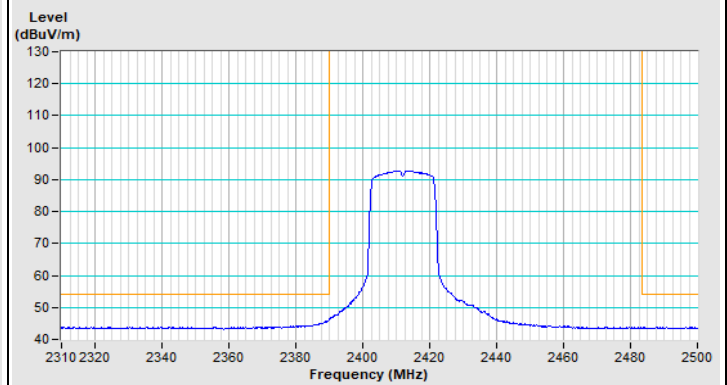

Horizontal (Average)

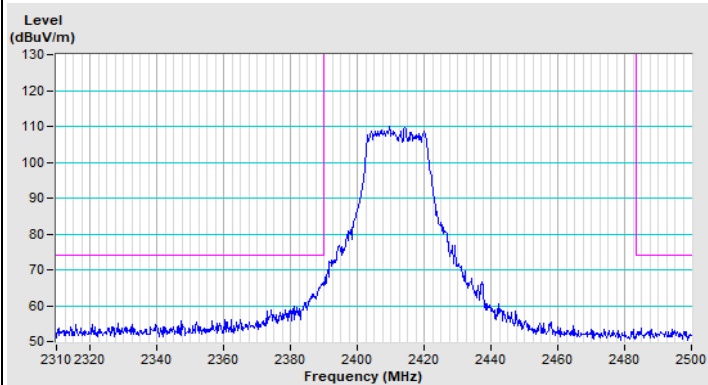


Vertical (Peak)

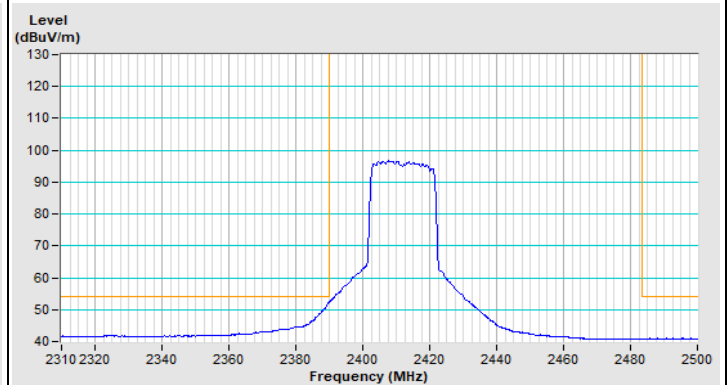


Vertical (Average)


802.11ax (HE20) Channel 11

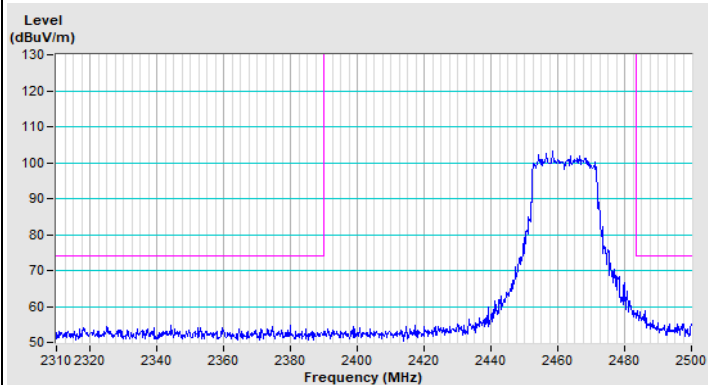


Horizontal (Peak)

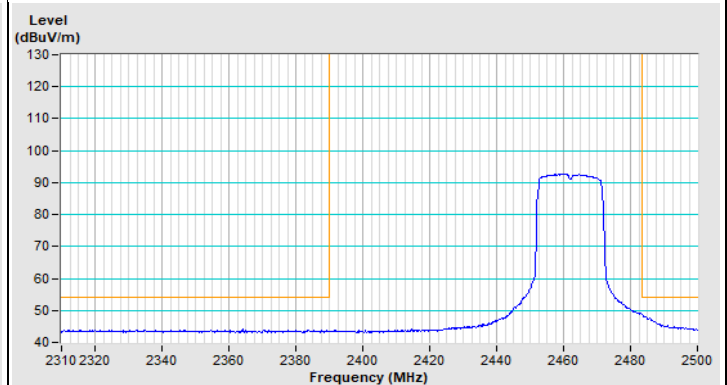

Horizontal (Average)

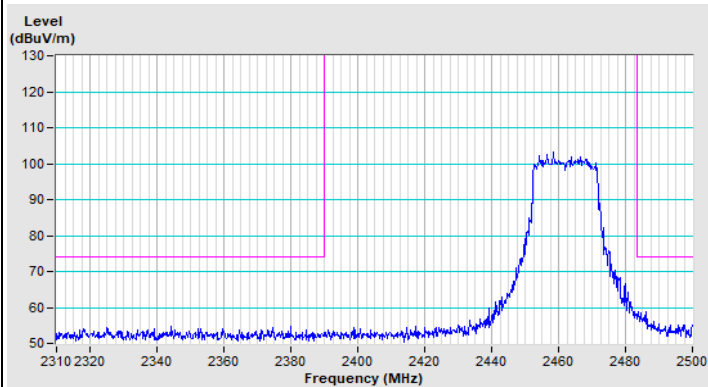


Vertical (Peak)

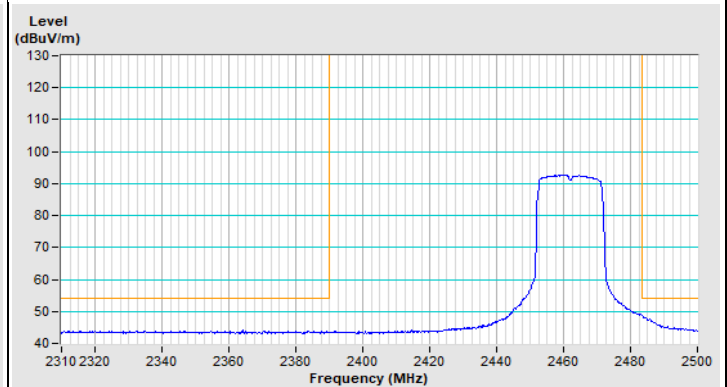


Vertical (Average)


802.11ax (HE20) Channel 12

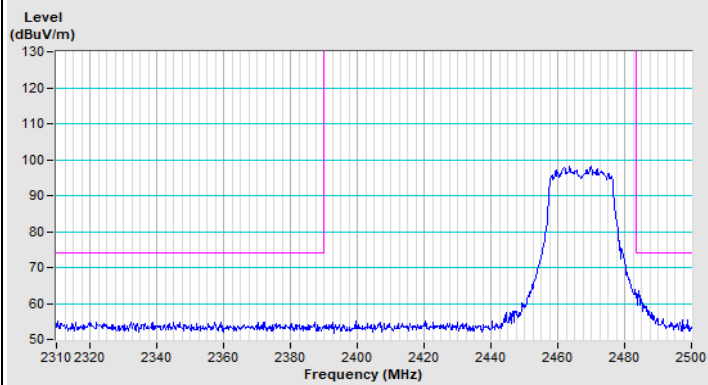


Horizontal (Peak)

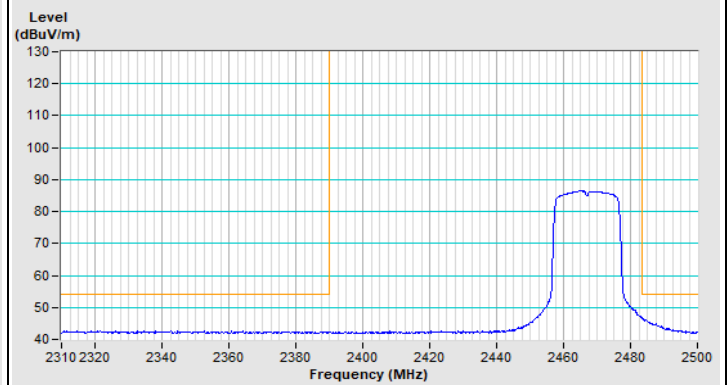

Horizontal (Average)

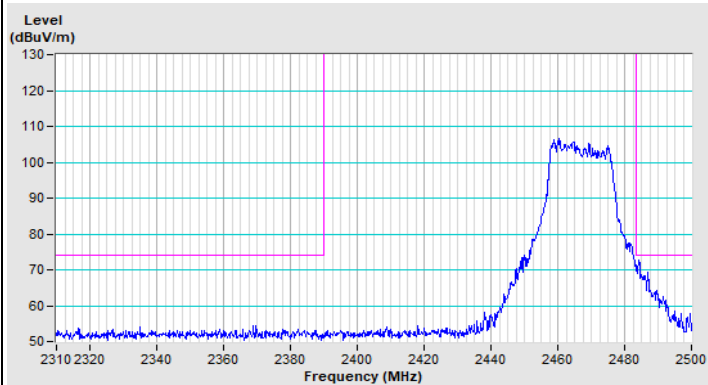


Vertical (Peak)

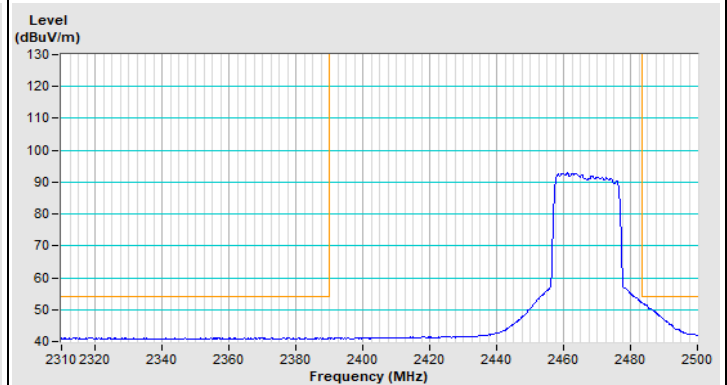


Vertical (Average)


802.11ax (HE20) Channel 13

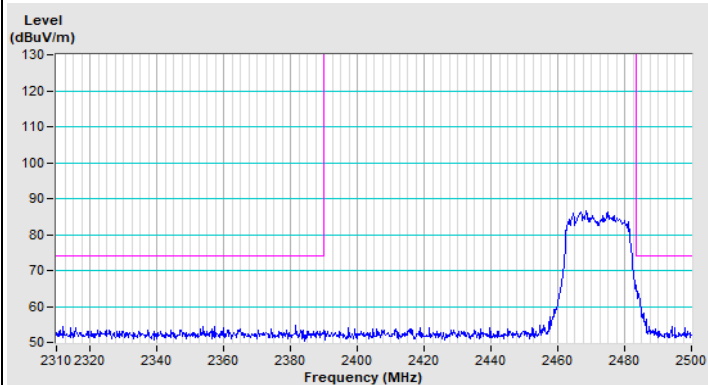


Horizontal (Peak)

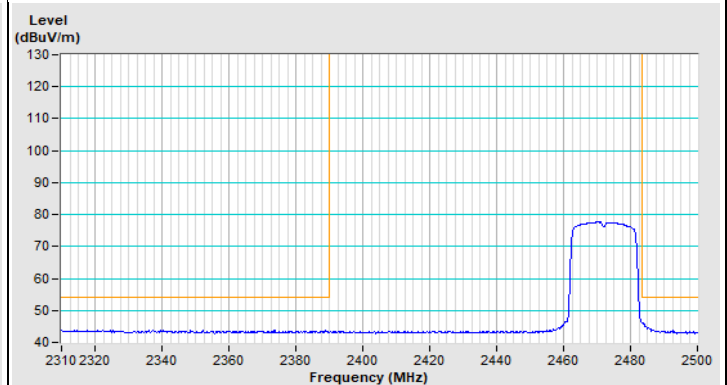

Horizontal (Average)




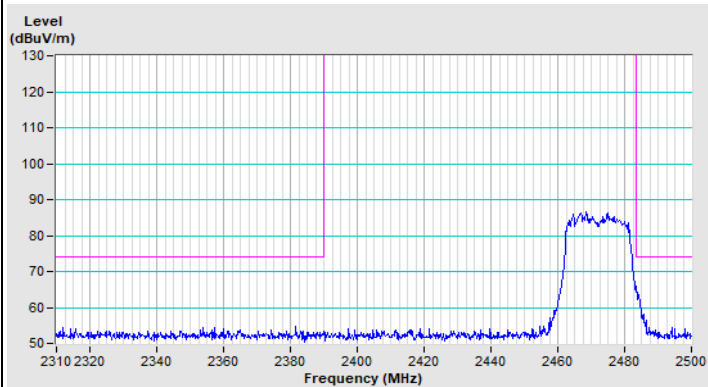


Vertical (Peak)




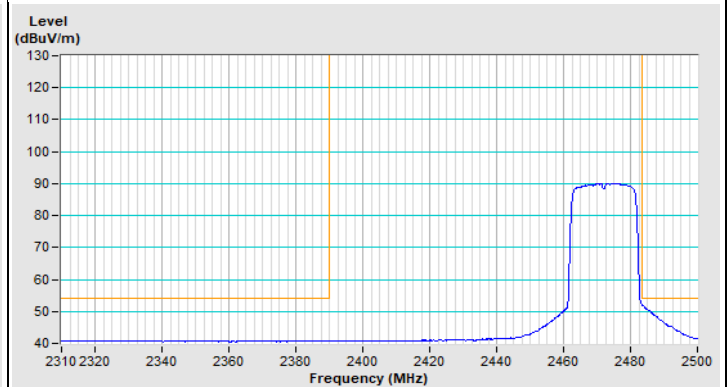


Vertical (Average)


802.11ax (HE40) Channel 3

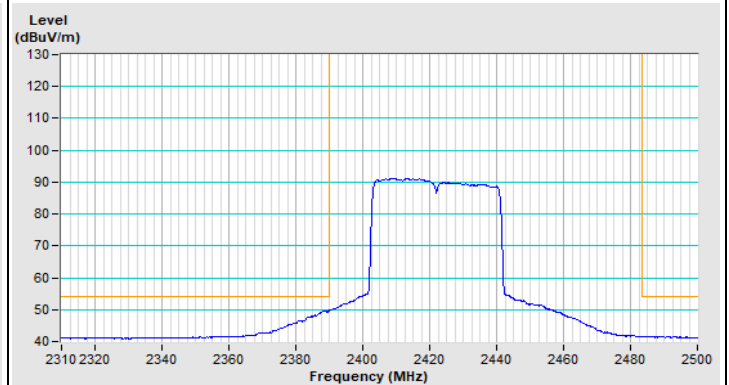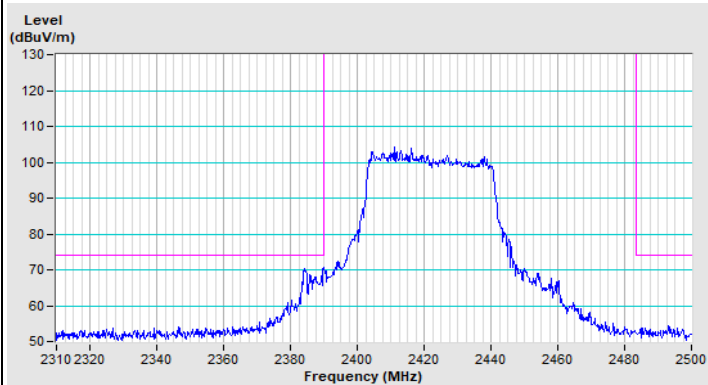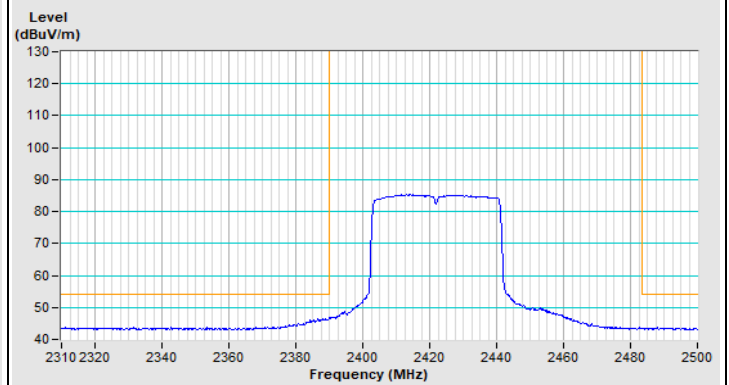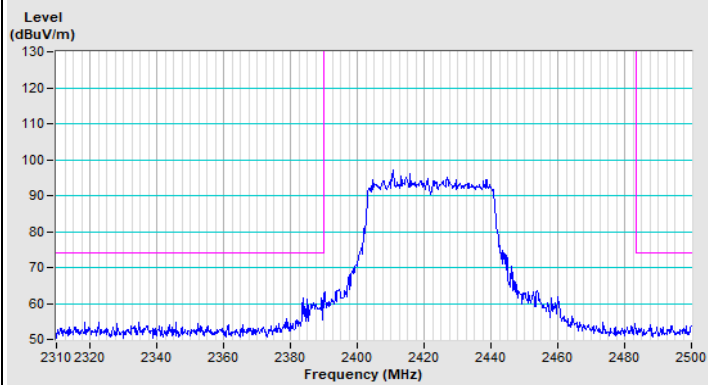


802.11ax (HE40) Channel 9

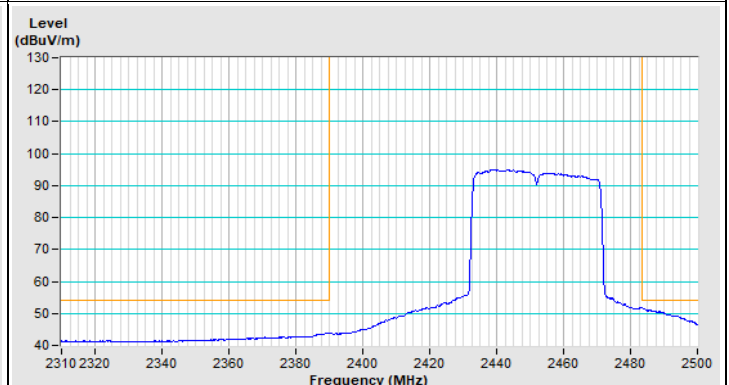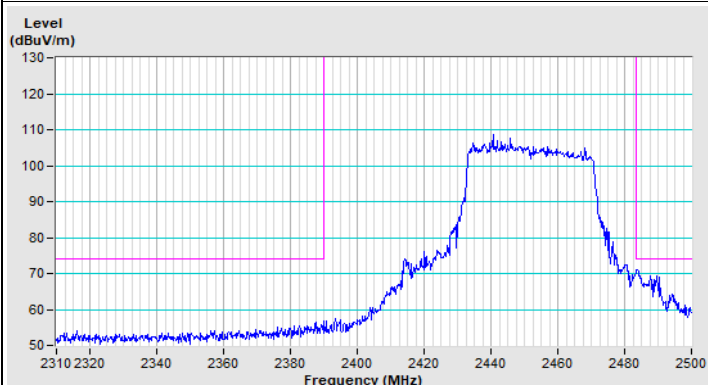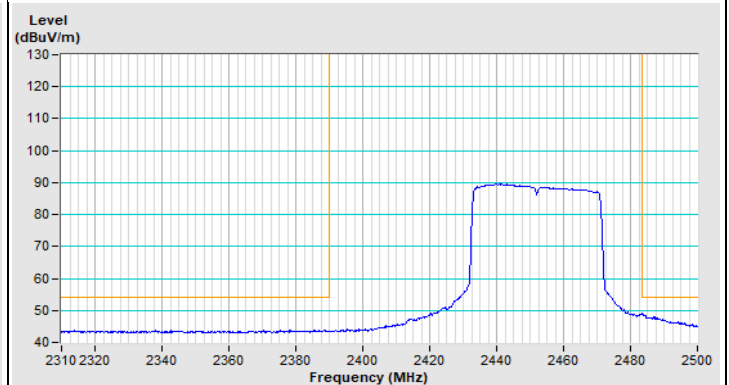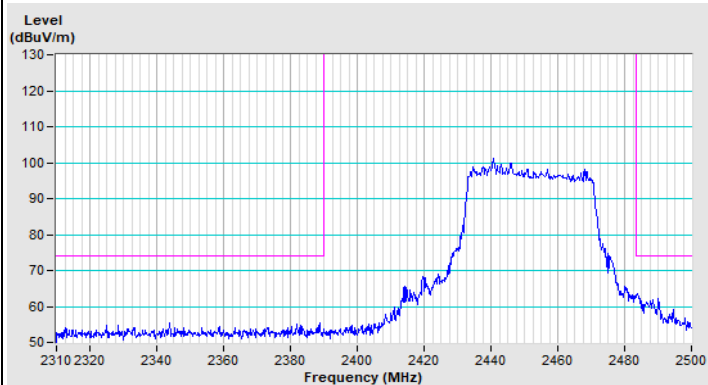


802.11ax (HE40) Channel 10

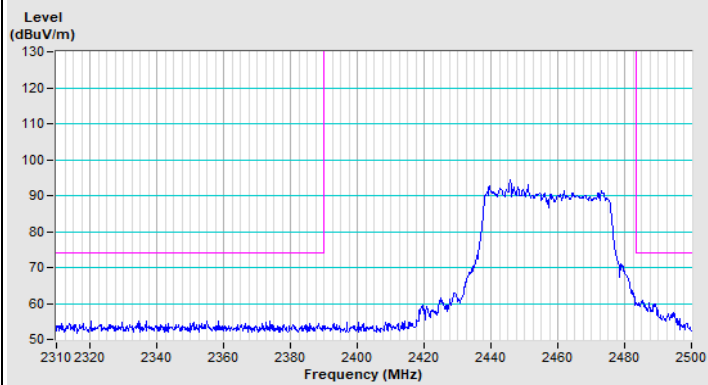


Horizontal (Peak)

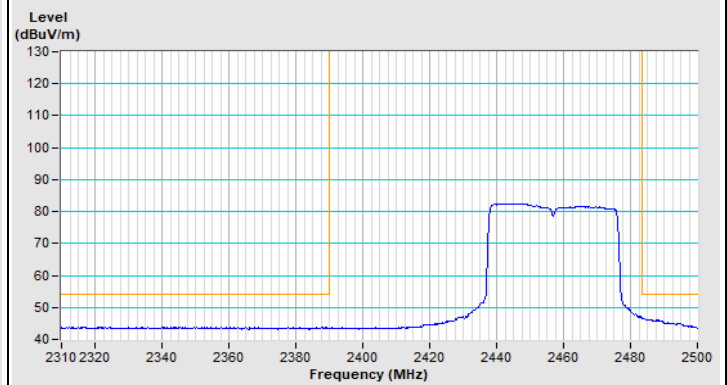

Horizontal (Average)

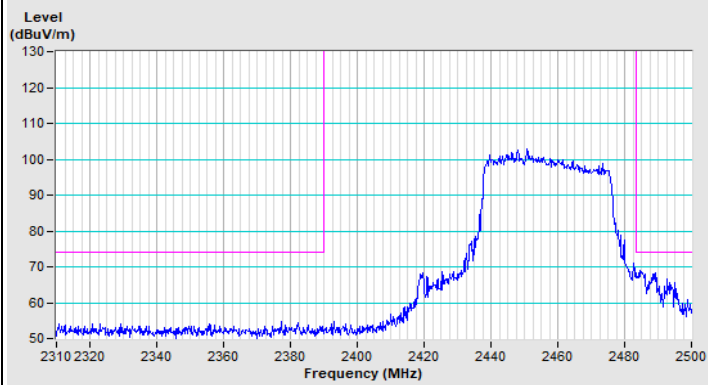


Vertical (Peak)

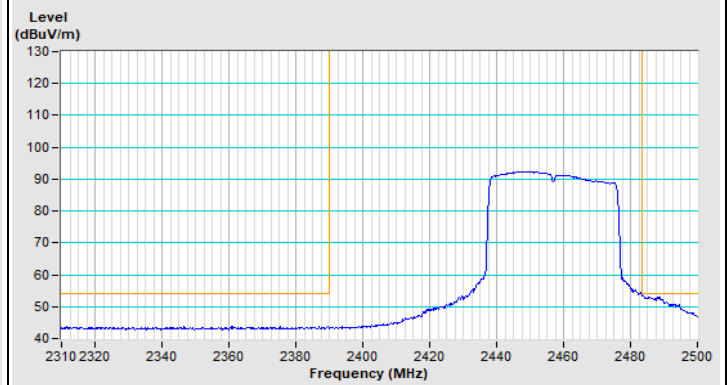


Vertical (Average)


802.11ax (HE40) Channel 11

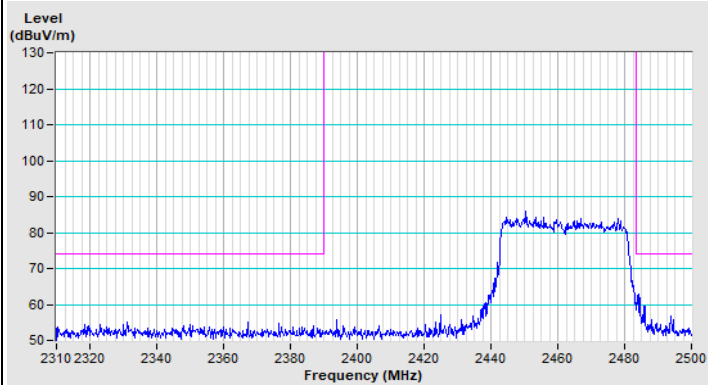


Horizontal (Peak)

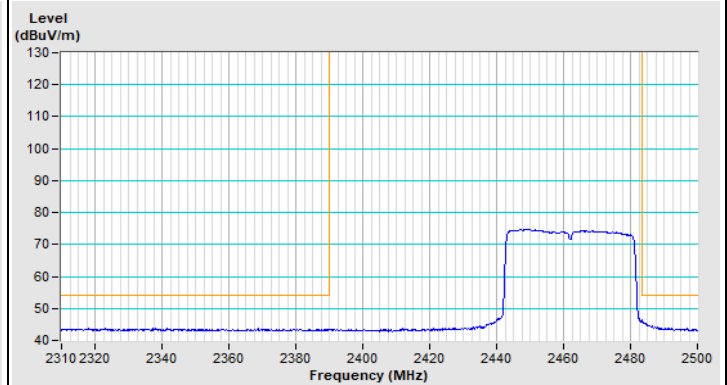

Horizontal (Average)

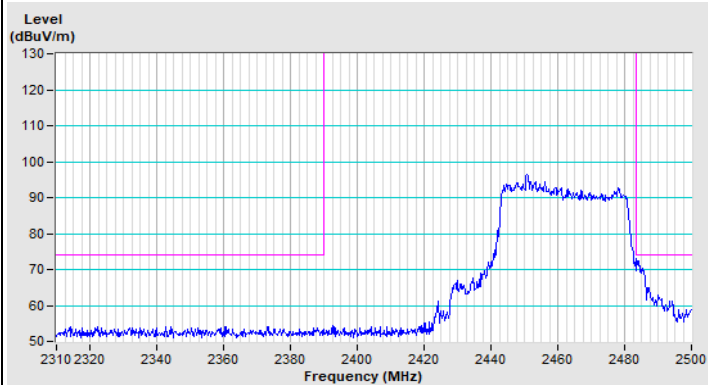


Vertical (Peak)

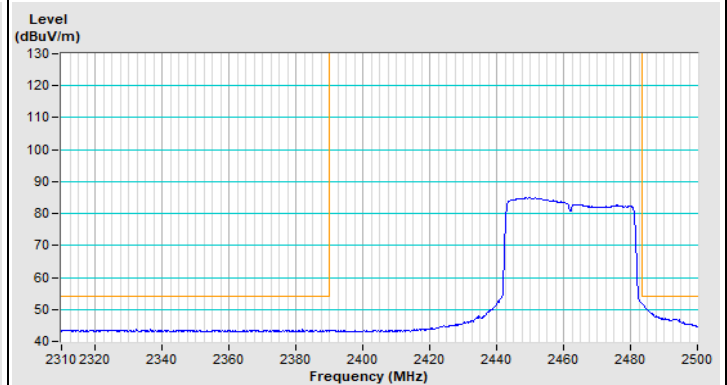


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 1

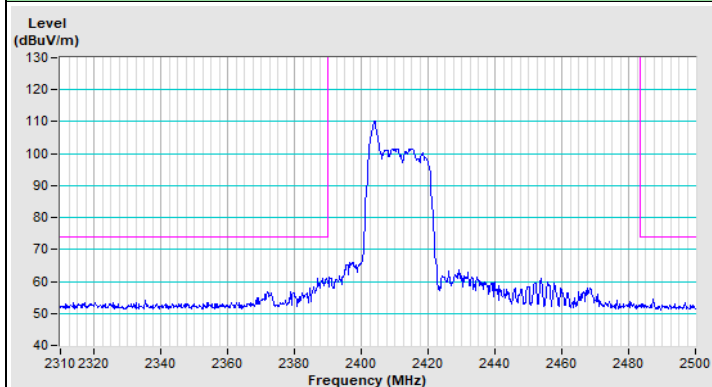


Horizontal (Peak)

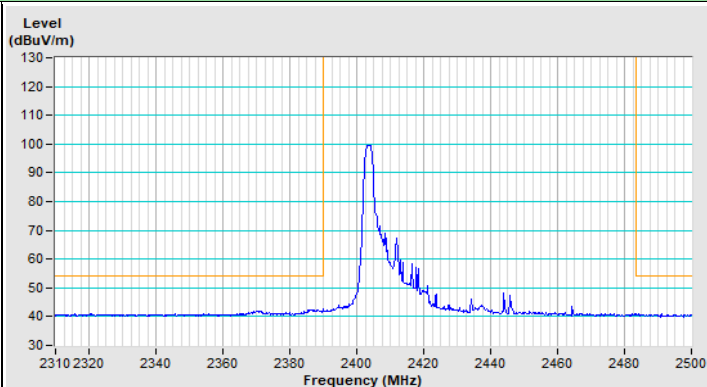

Horizontal (Average)

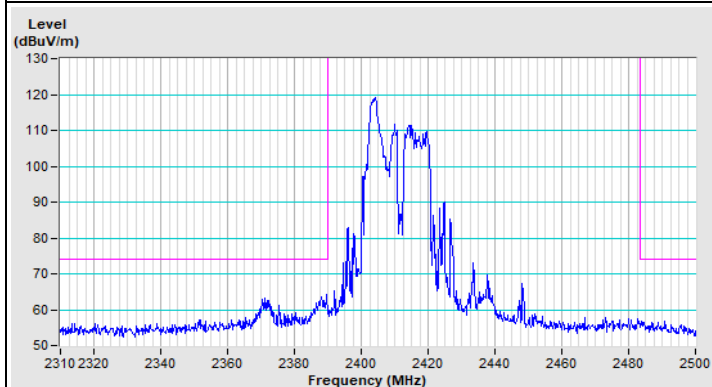


Vertical (Peak)

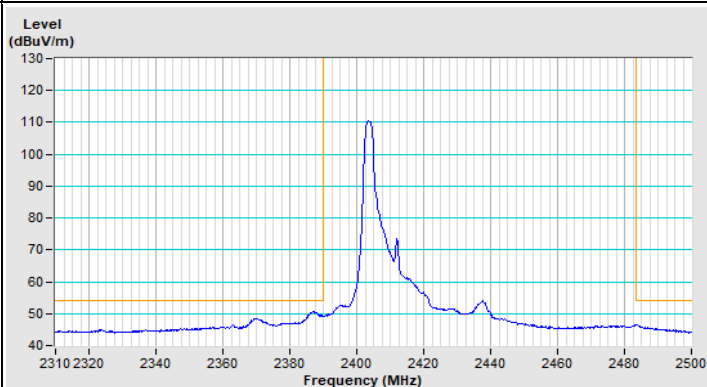


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 11

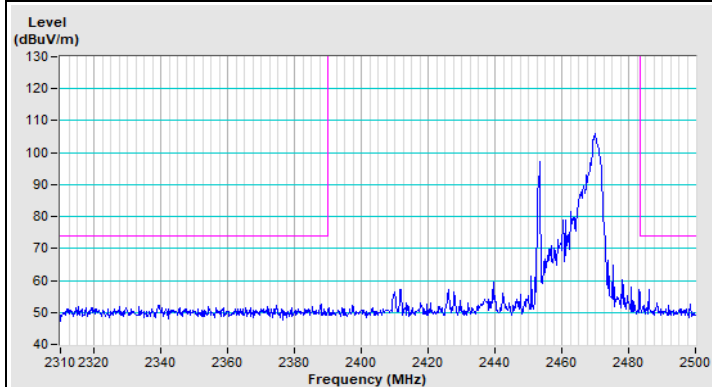


Horizontal (Peak)

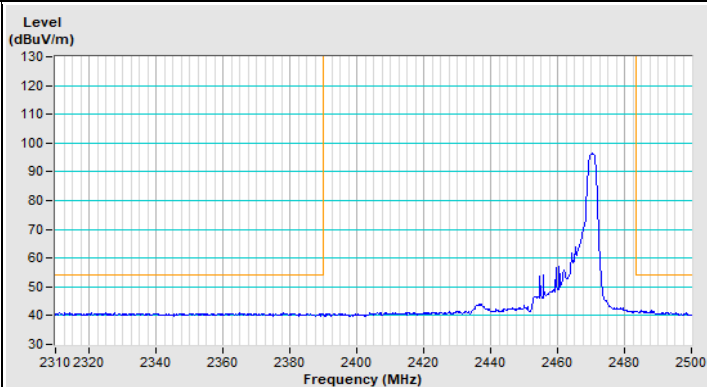

Horizontal (Average)

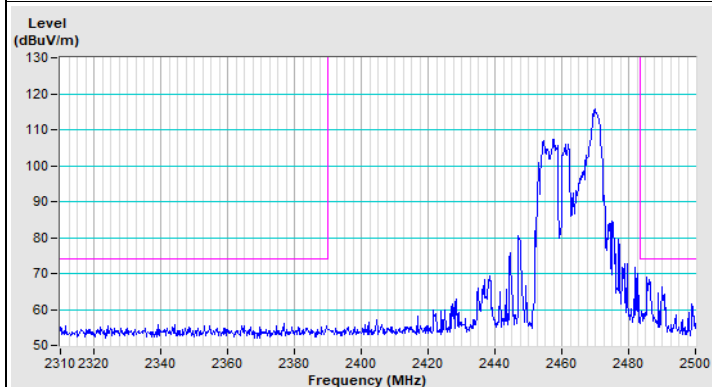


Vertical (Peak)

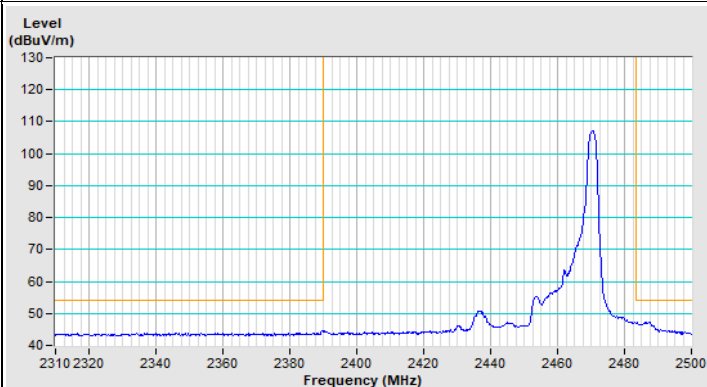


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 12

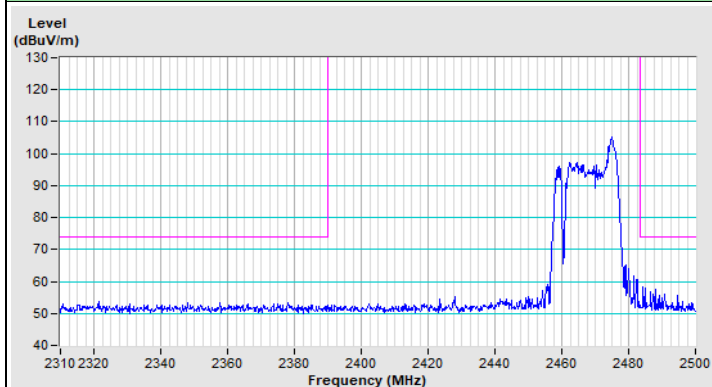


Horizontal (Peak)

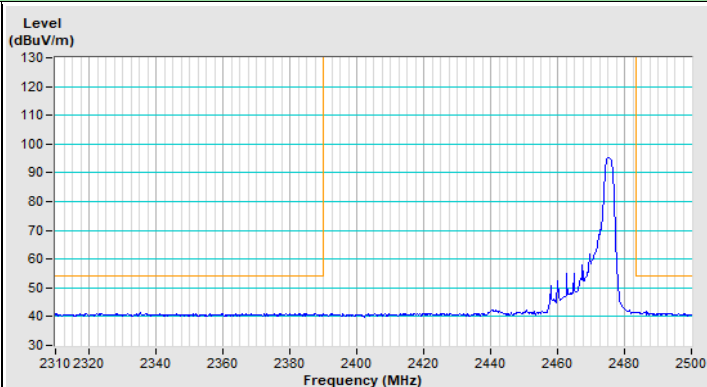

Horizontal (Average)

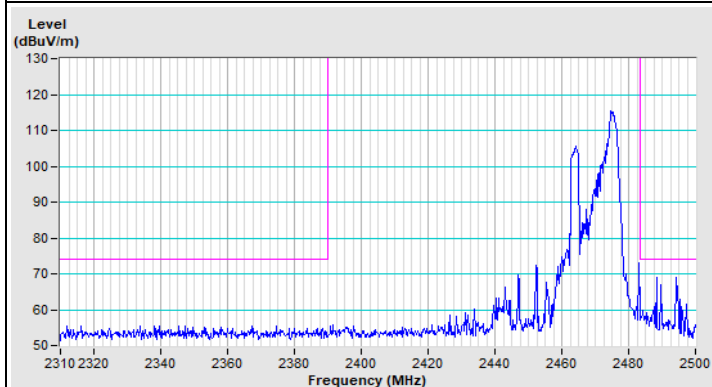


Vertical (Peak)

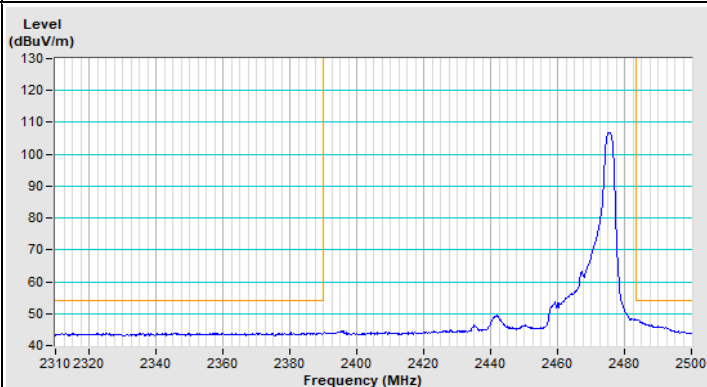


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 13

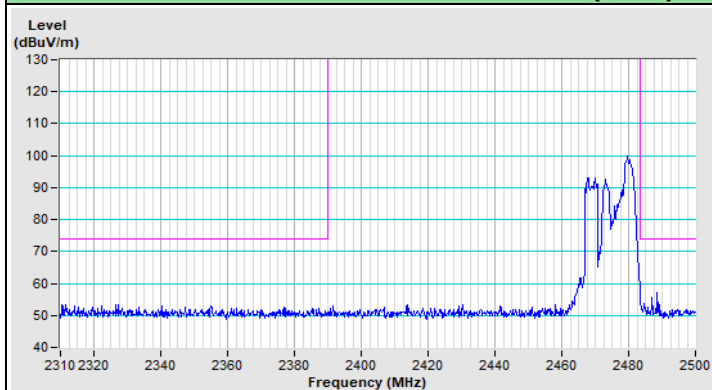


Horizontal (Peak)

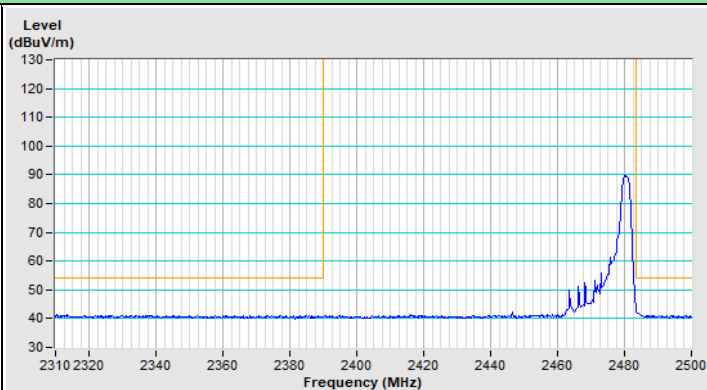

Horizontal (Average)

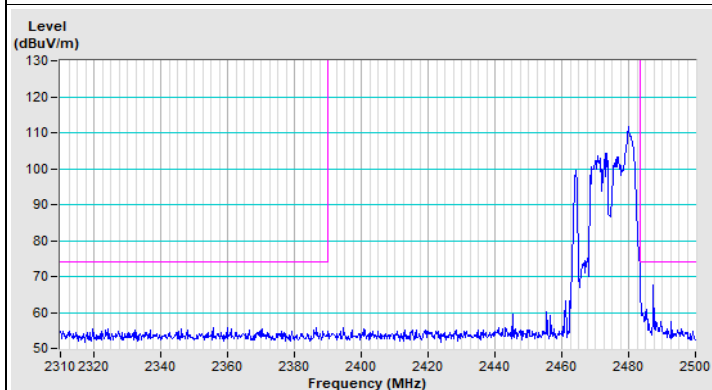


Vertical (Peak)

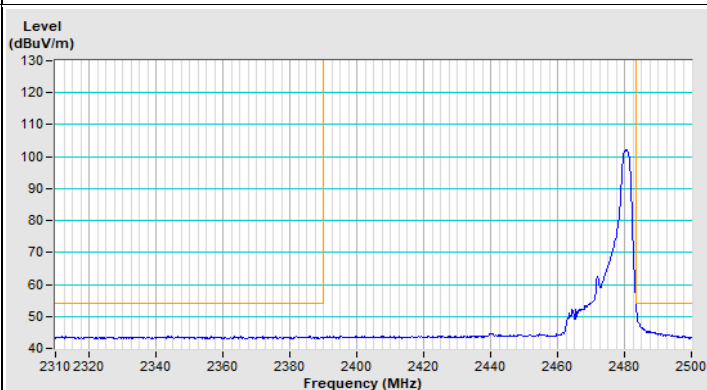


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 1

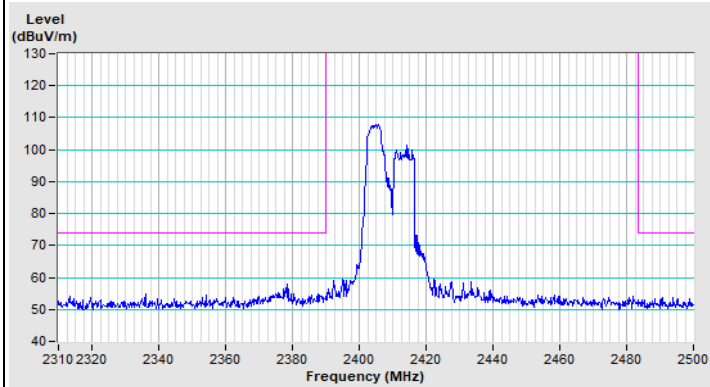


Horizontal (Peak)

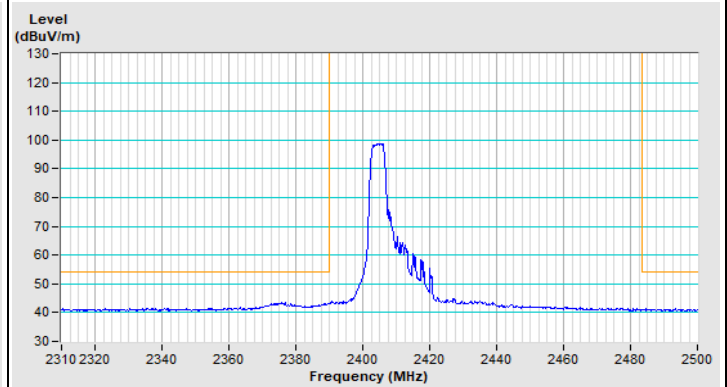

Horizontal (Average)

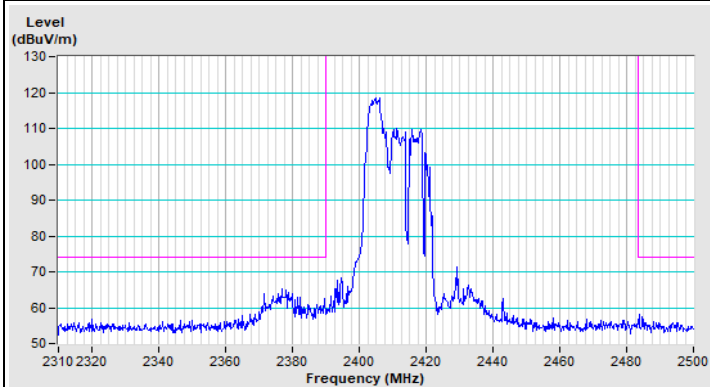


Vertical (Peak)

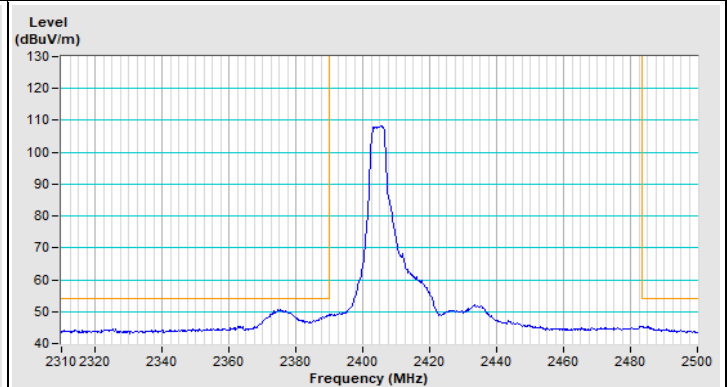


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 11

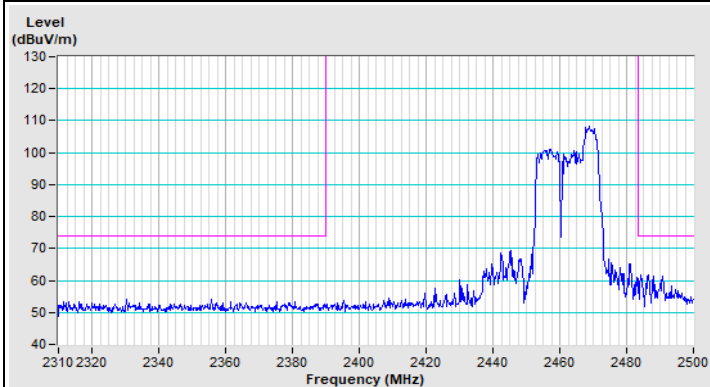


Horizontal (Peak)

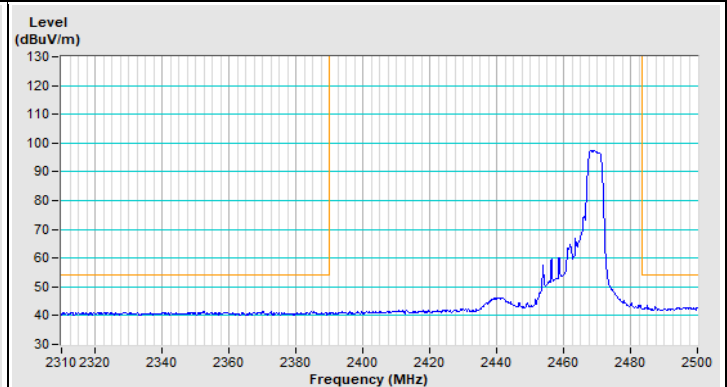

Horizontal (Average)

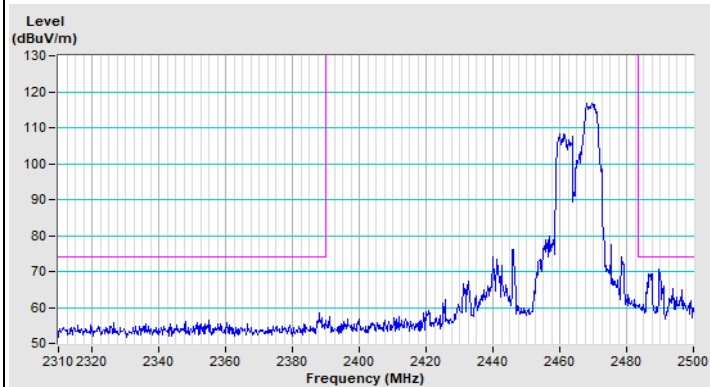


Vertical (Peak)

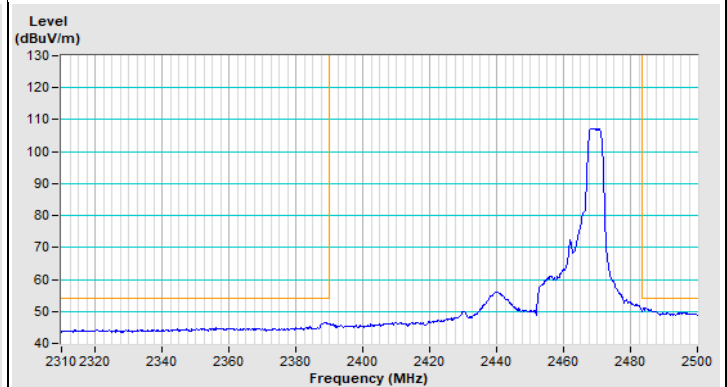


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 12

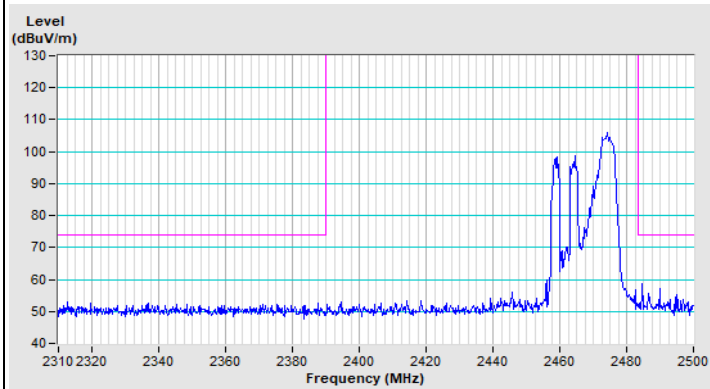


Horizontal (Peak)

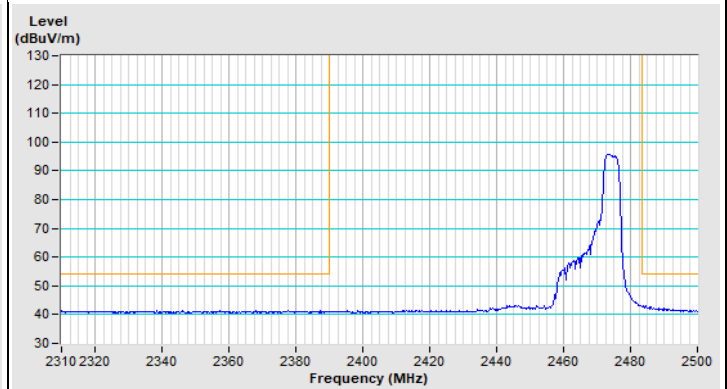

Horizontal (Average)

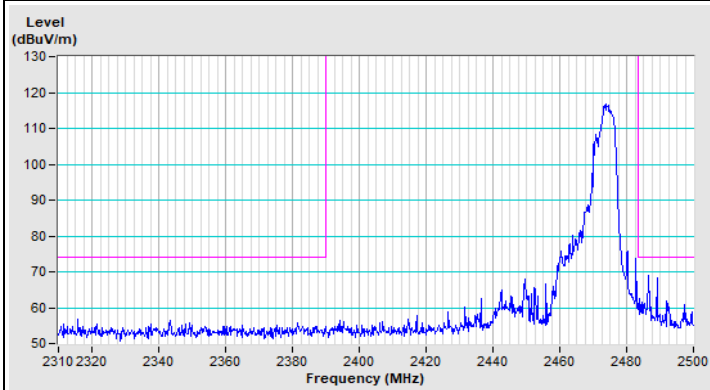


Vertical (Peak)

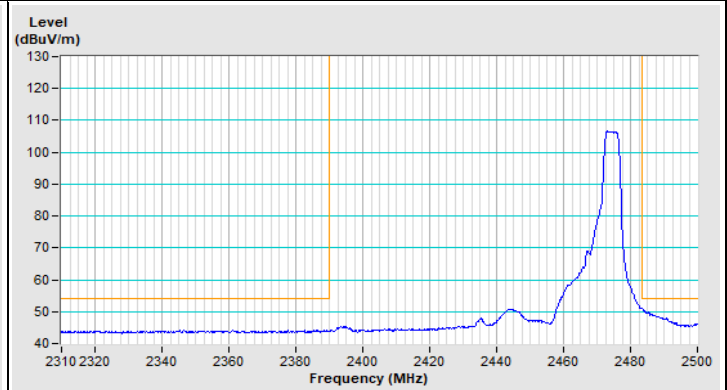


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 13

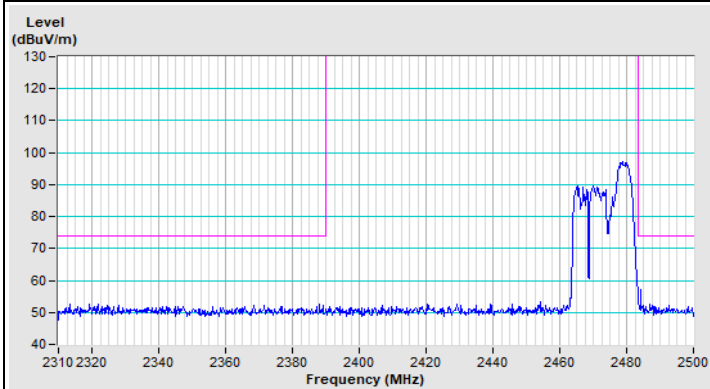


Horizontal (Peak)

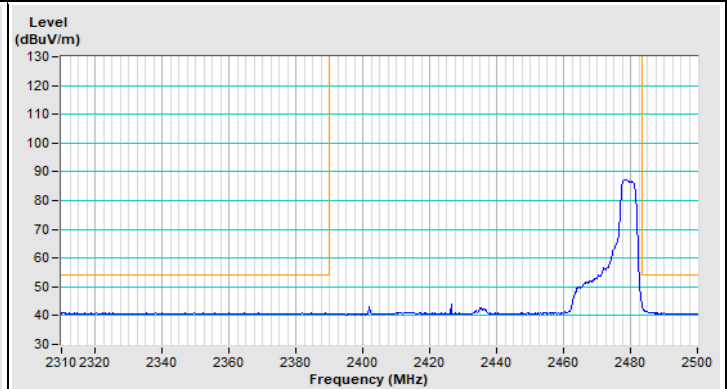

Horizontal (Average)

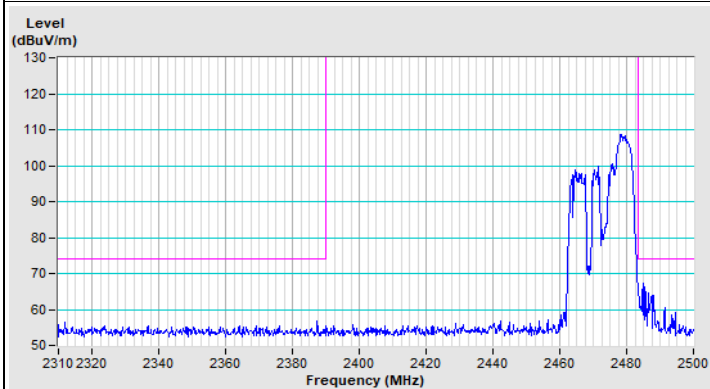


Vertical (Peak)

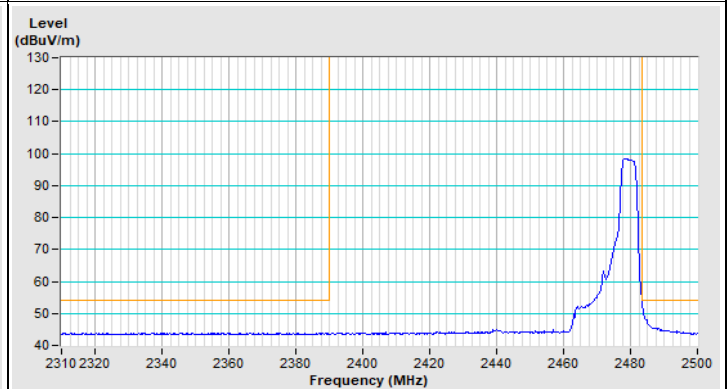


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 1

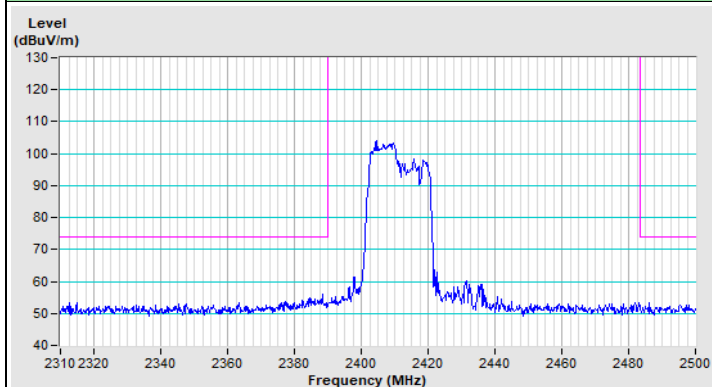


Horizontal (Peak)

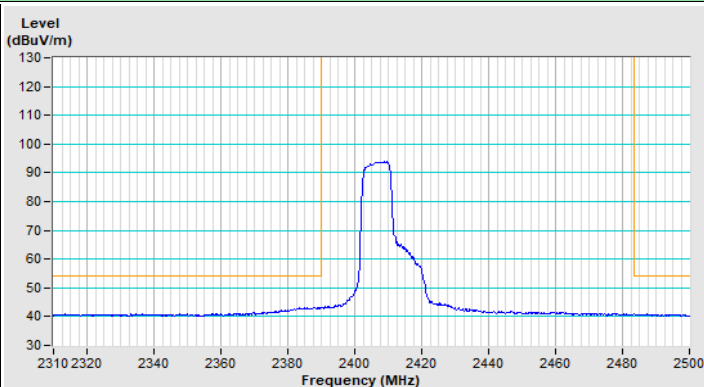

Horizontal (Average)

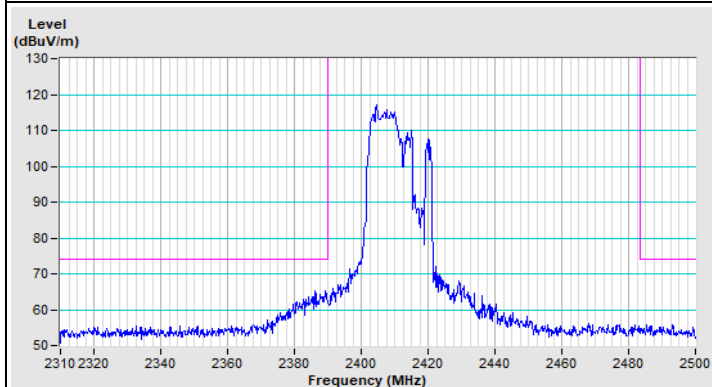


Vertical (Peak)

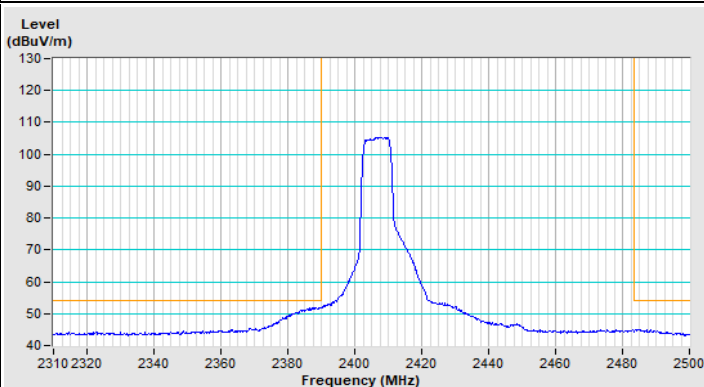


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 11

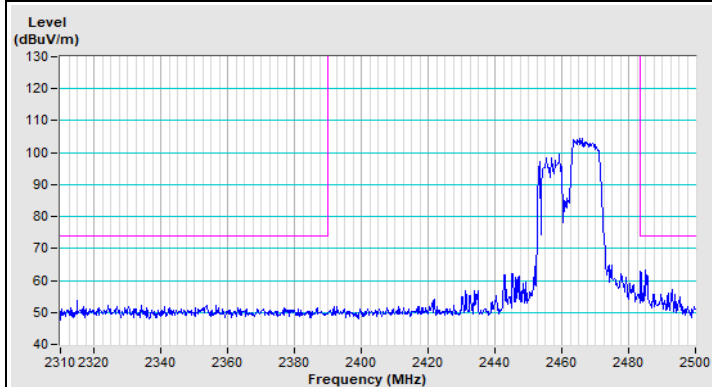


Horizontal (Peak)

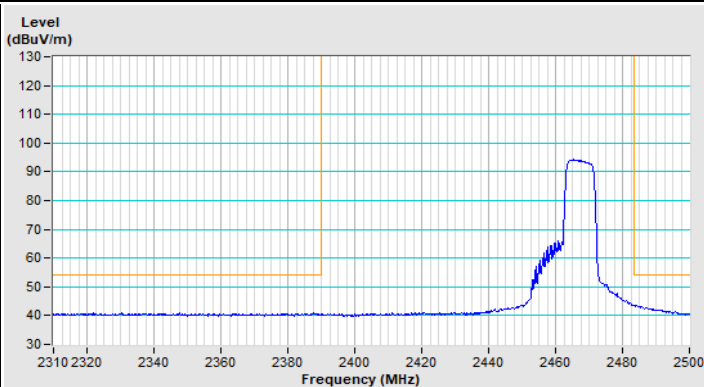

Horizontal (Average)

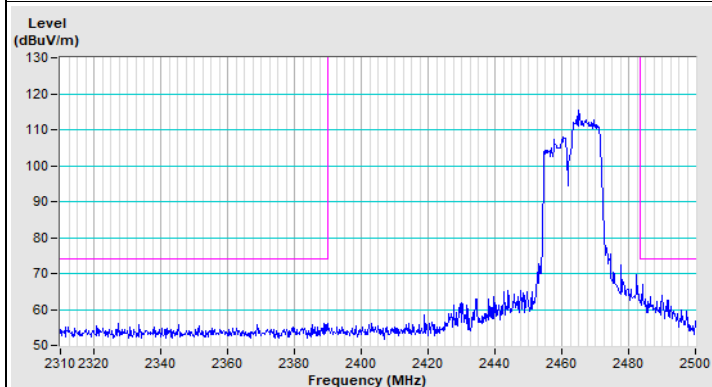


Vertical (Peak)

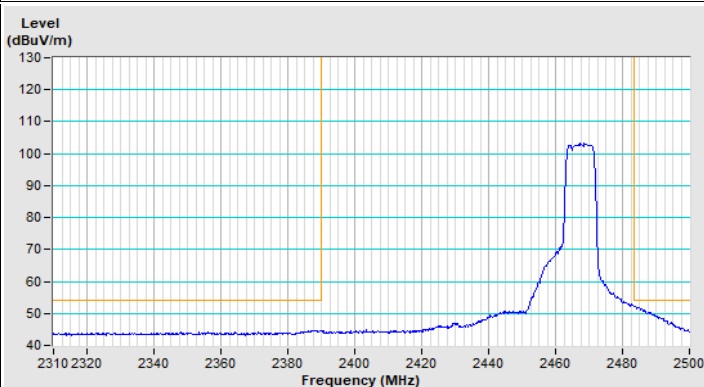


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 12

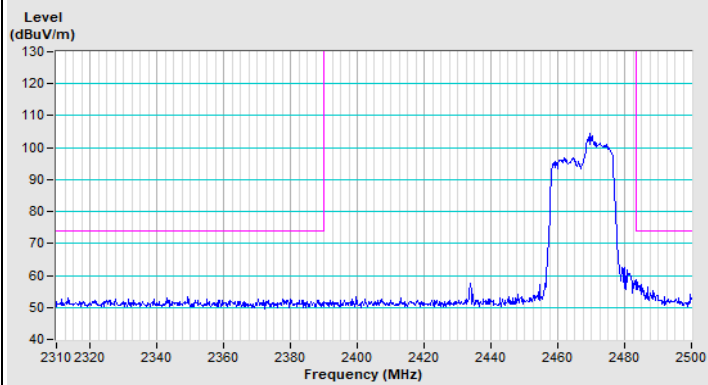


Horizontal (Peak)

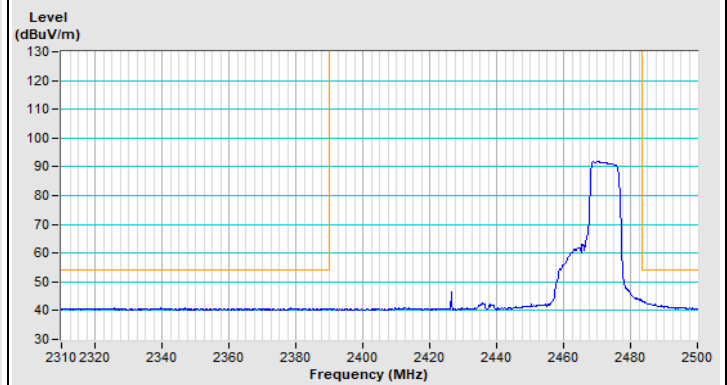

Horizontal (Average)

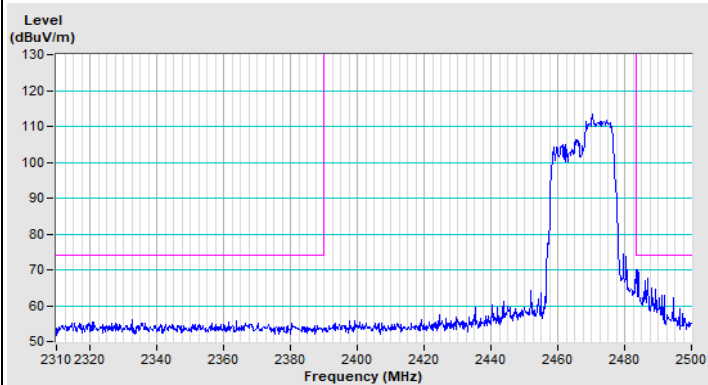


Vertical (Peak)

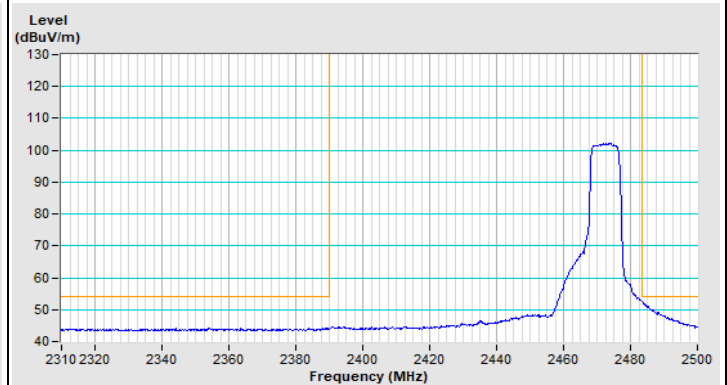


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 13

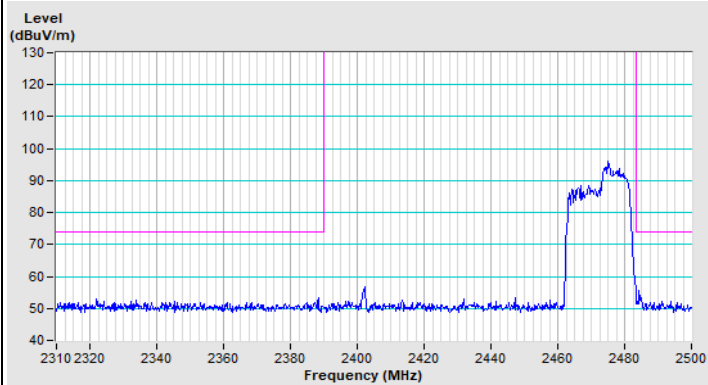


Horizontal (Peak)

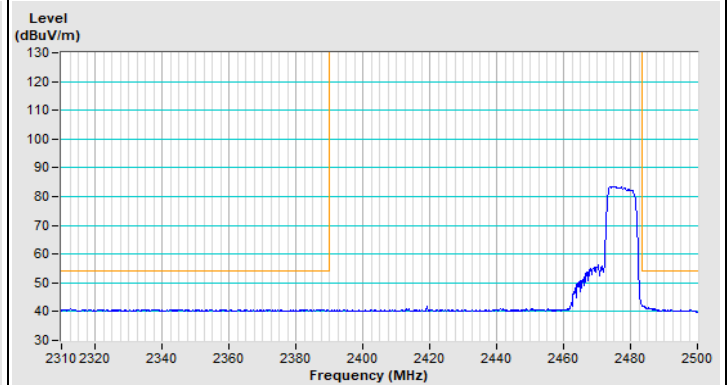

Horizontal (Average)

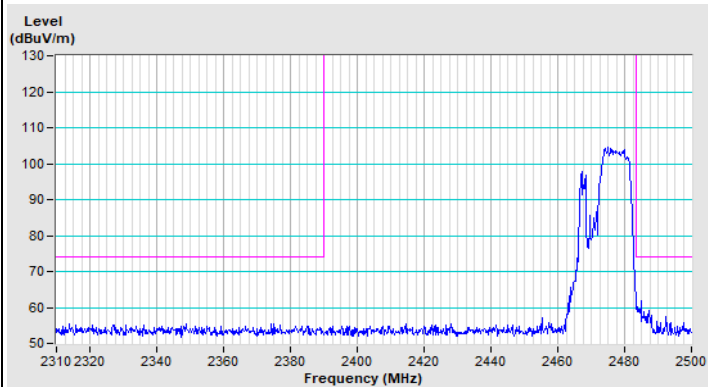


Vertical (Peak)

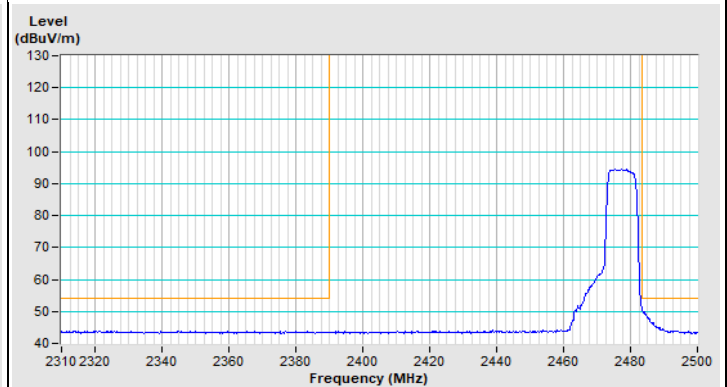


Vertical (Average)

Plot of Band Edge Mode B


802.11b Channel 1

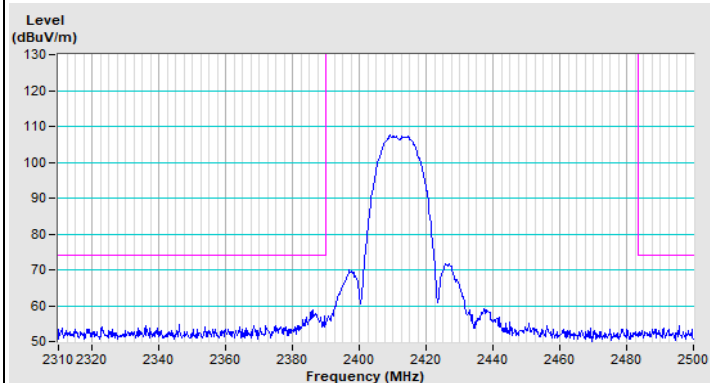


Horizontal (Peak)

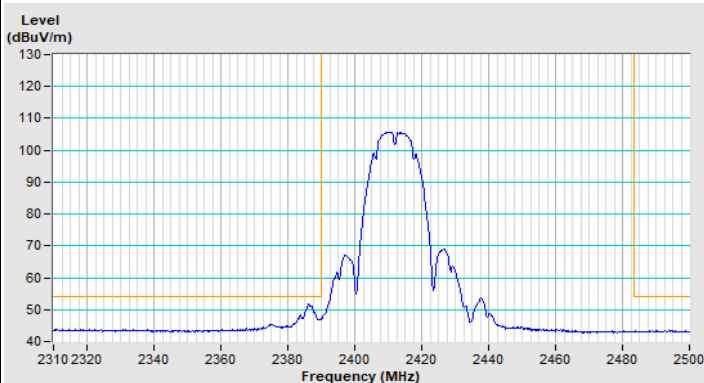

Horizontal (Average)

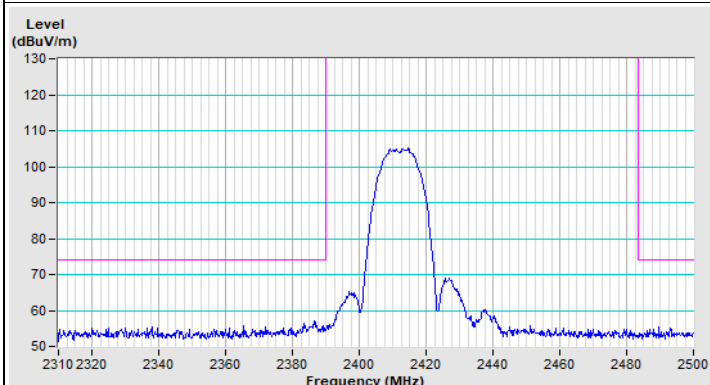


Vertical (Peak)

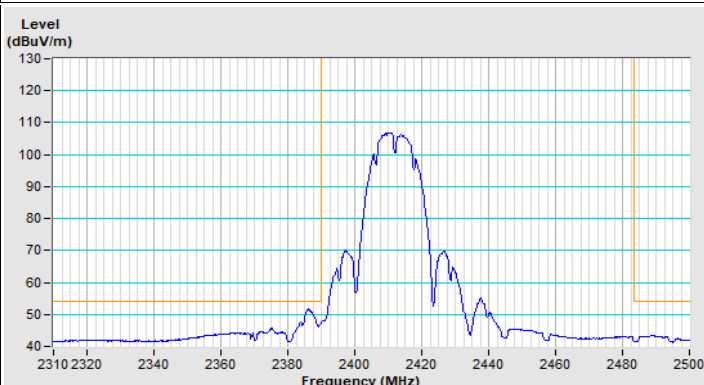


Vertical (Average)


802.11b Channel 11

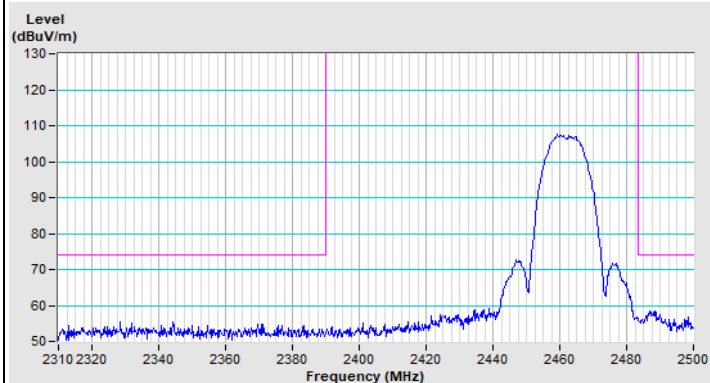


Horizontal (Peak)

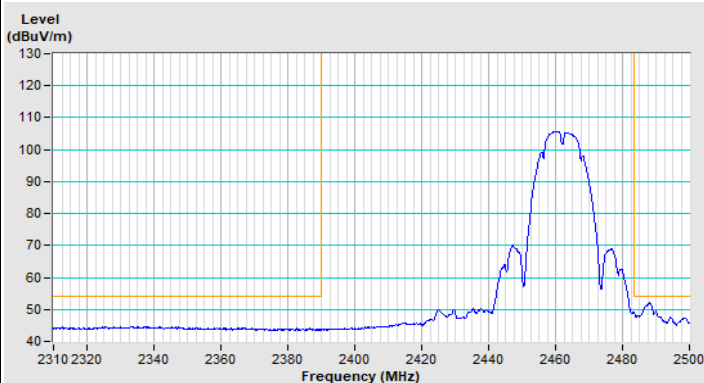

Horizontal (Average)

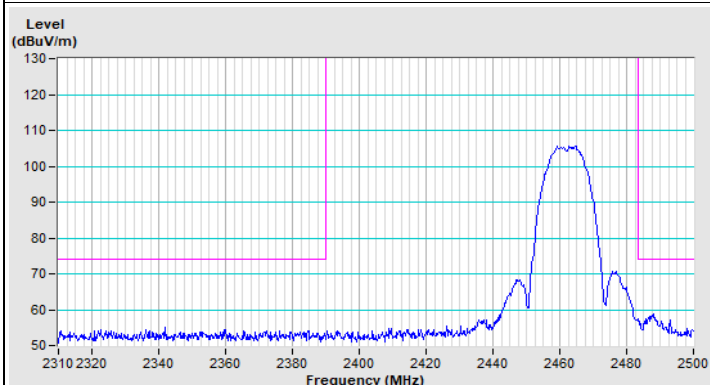


Vertical (Peak)

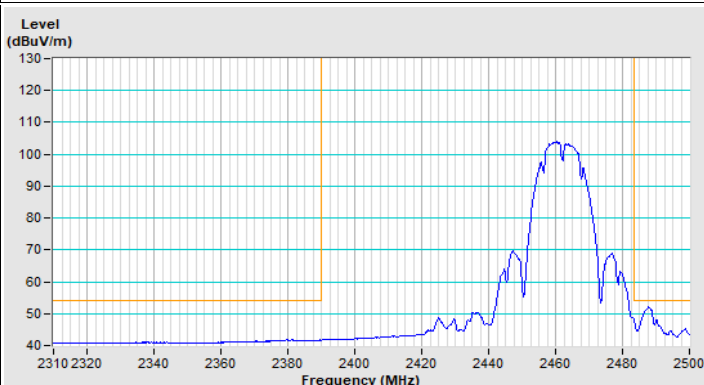


Vertical (Average)


802.11b Channel 12

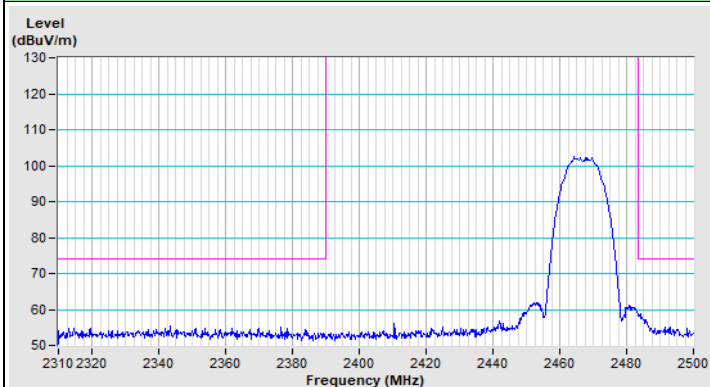


Horizontal (Peak)

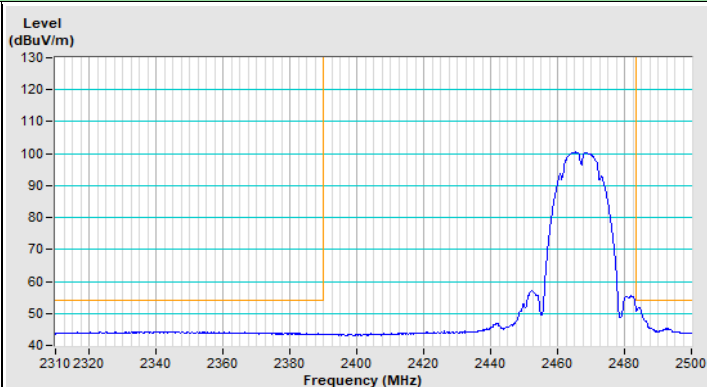

Horizontal (Average)

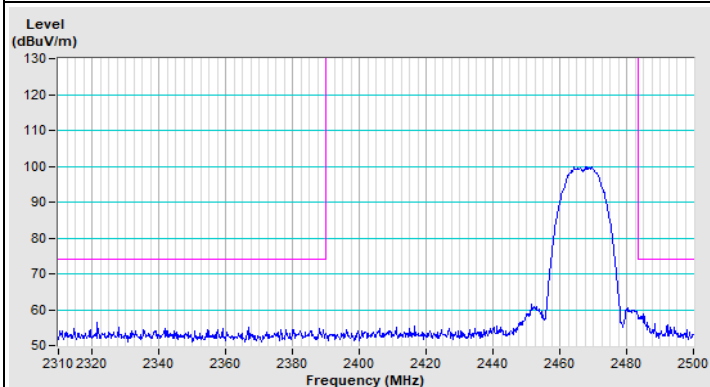


Vertical (Peak)

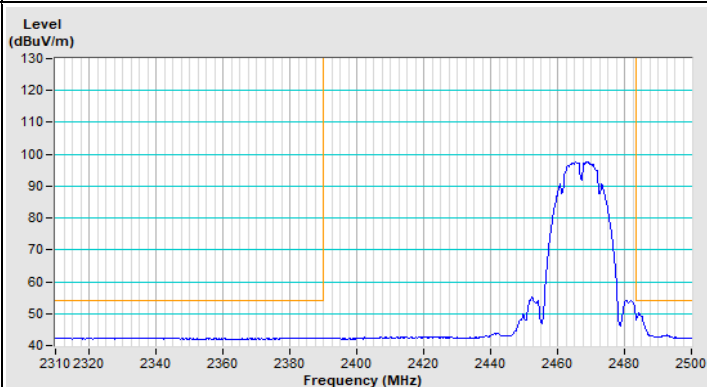


Vertical (Average)


802.11b Channel 13

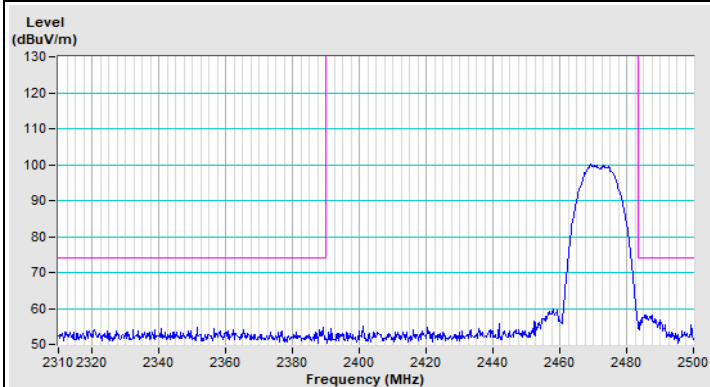


Horizontal (Peak)

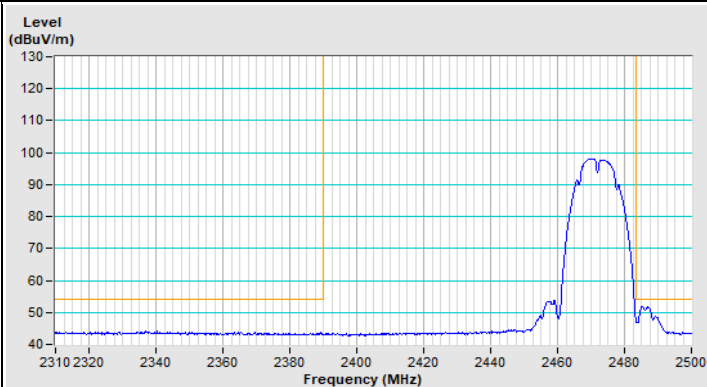

Horizontal (Average)

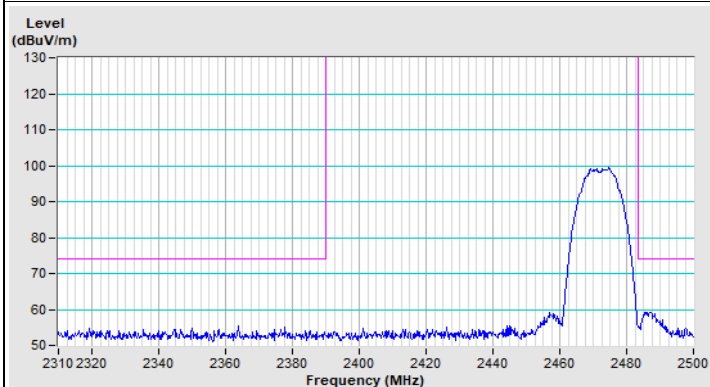


Vertical (Peak)

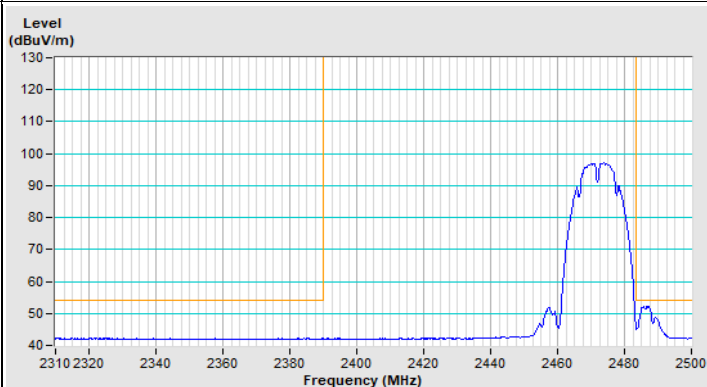


Vertical (Average)


802.11g Channel 1

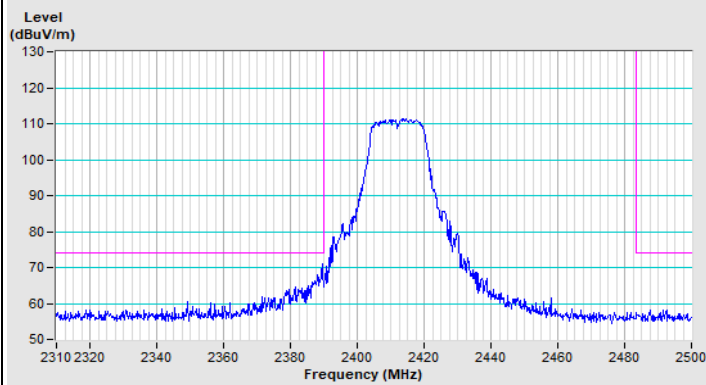


Horizontal (Peak)

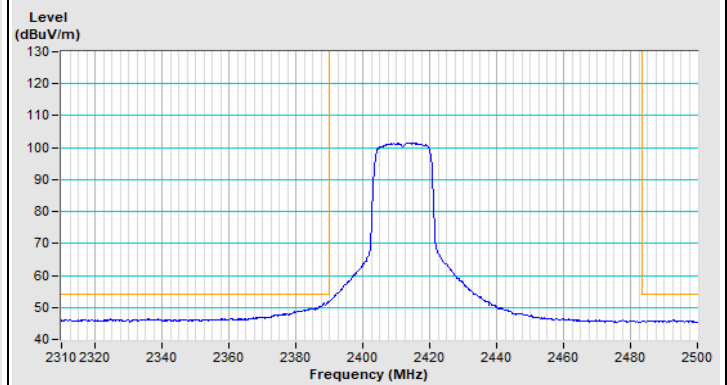

Horizontal (Average)

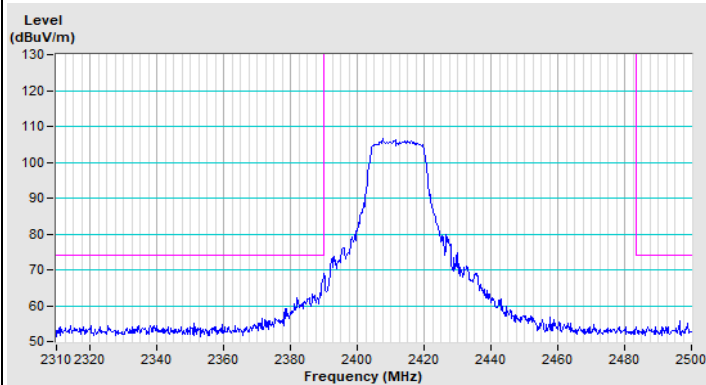


Vertical (Peak)

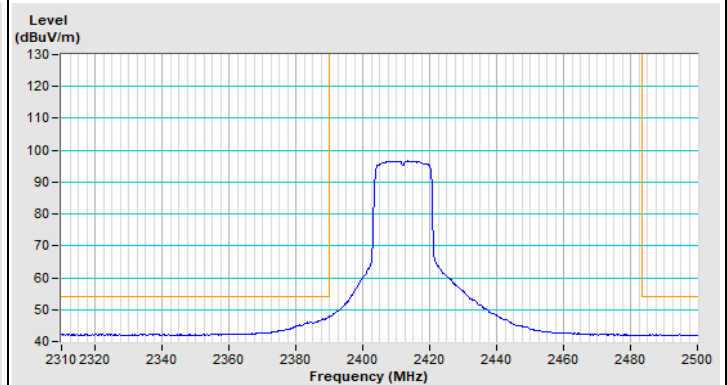


Vertical (Average)


802.11g Channel 11

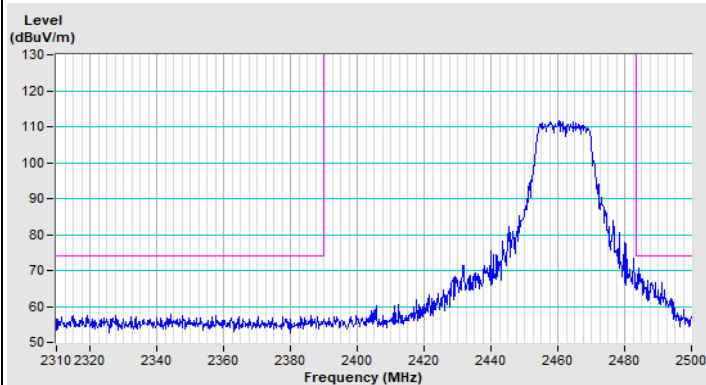


Horizontal (Peak)

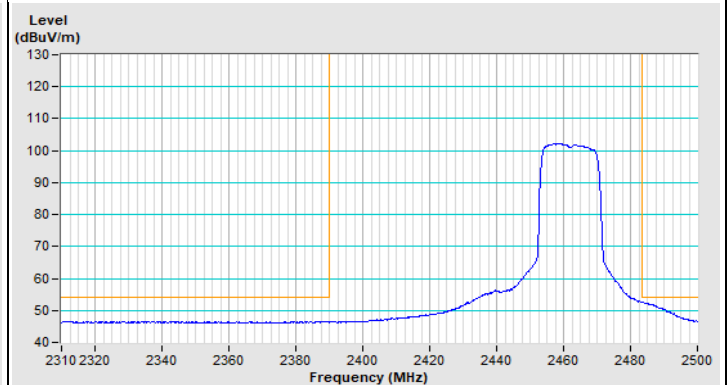

Horizontal (Average)

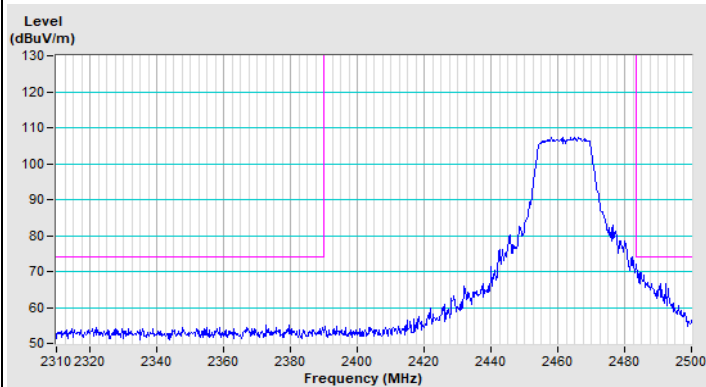


Vertical (Peak)

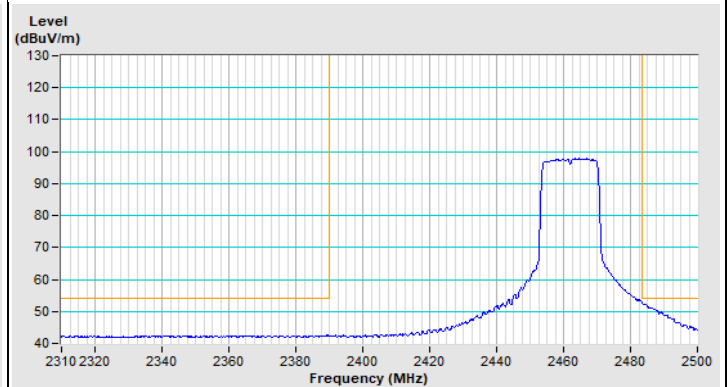


Vertical (Average)


802.11g Channel 12

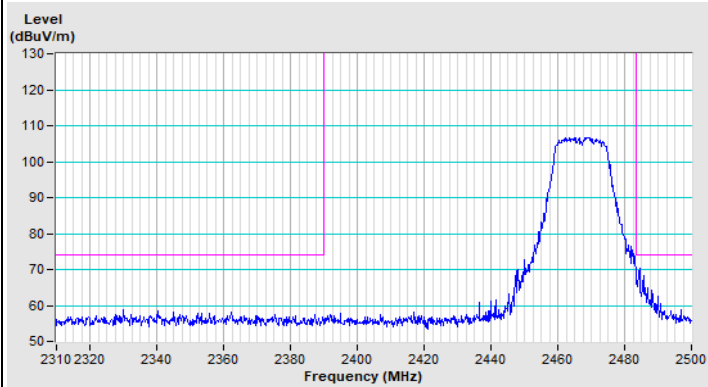


Horizontal (Peak)

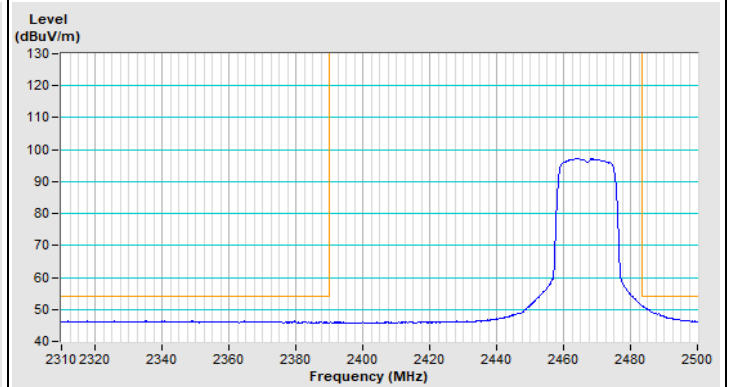

Horizontal (Average)

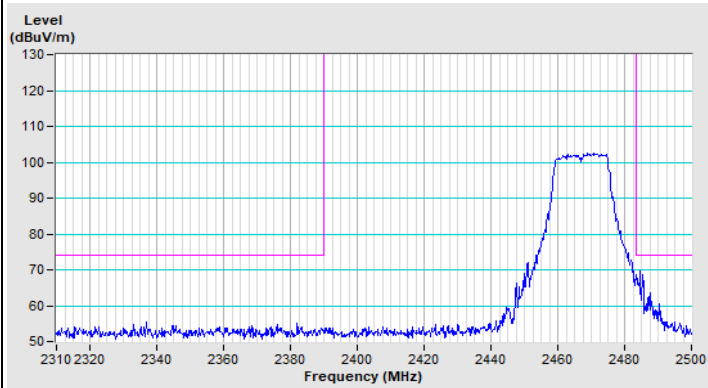


Vertical (Peak)

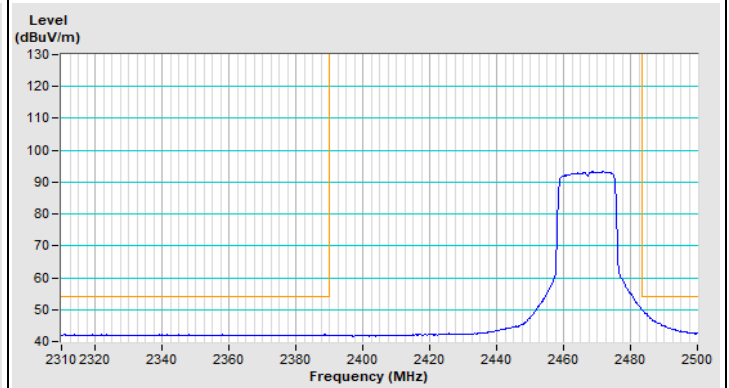


Vertical (Average)


802.11g Channel 13

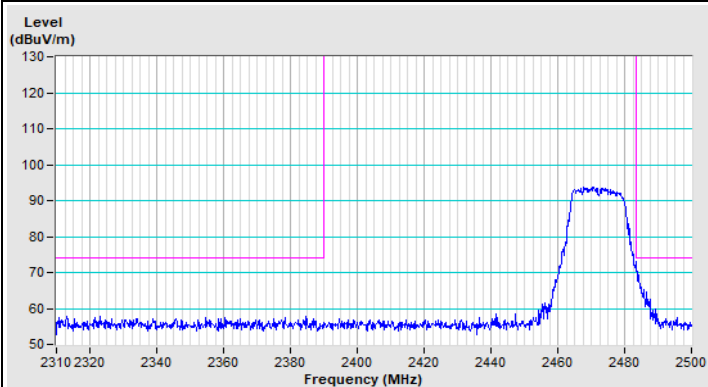


Horizontal (Peak)

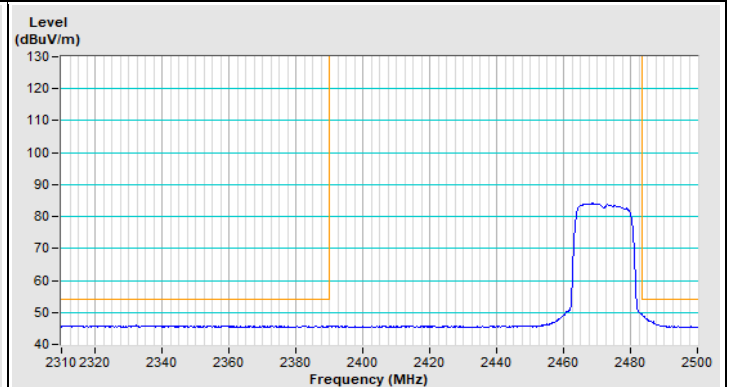

Horizontal (Average)




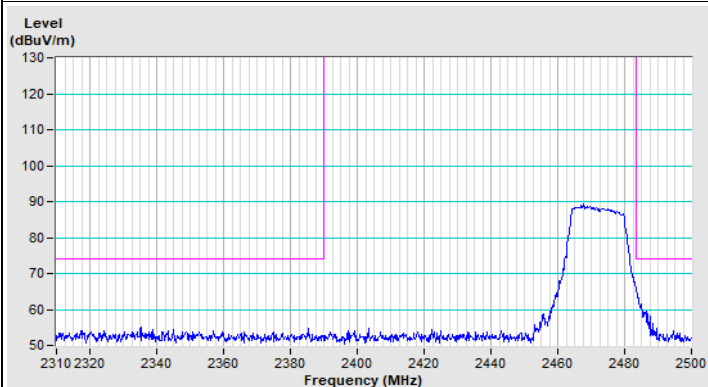


Vertical (Peak)




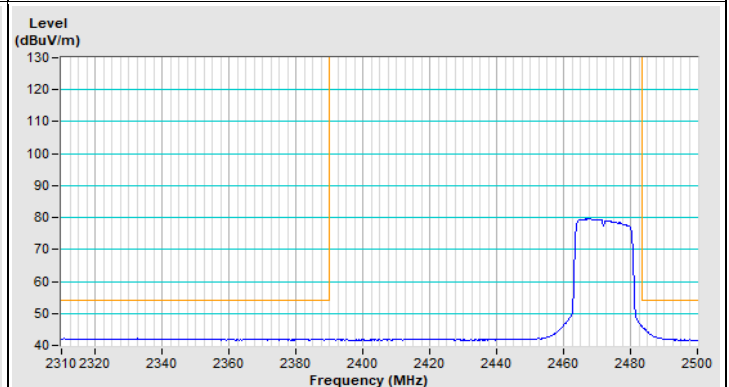


Vertical (Average)





802.11ax (HE20) Channel 1

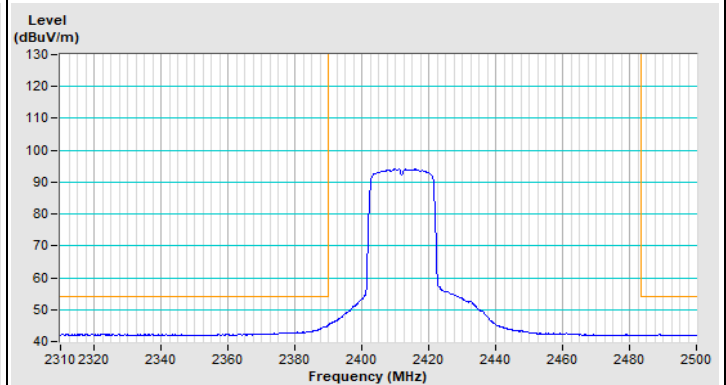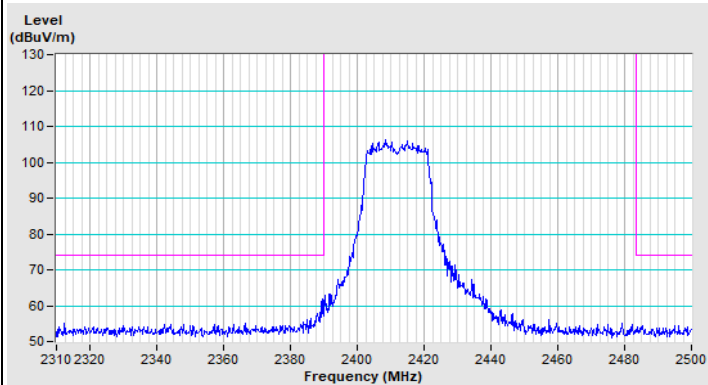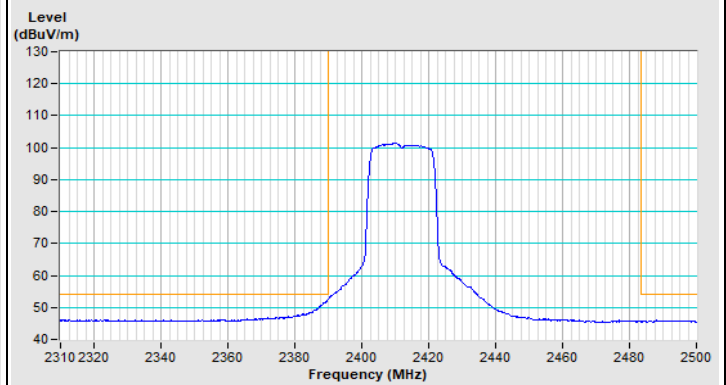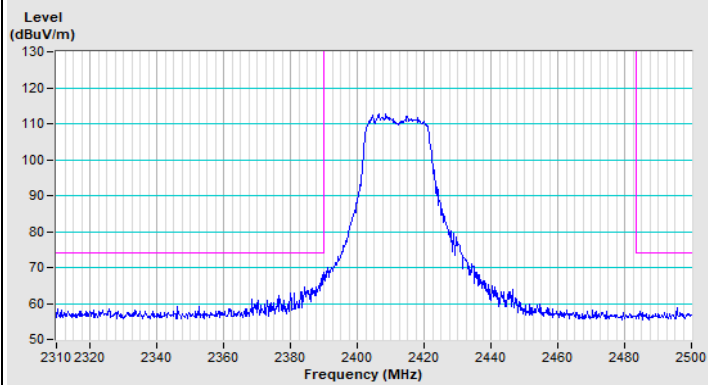





802.11ax (HE20) Channel 11

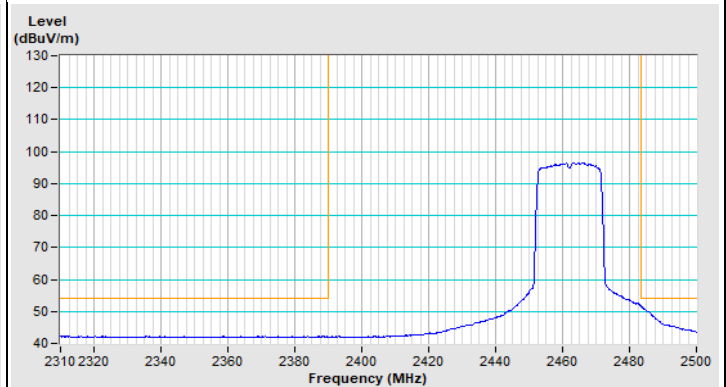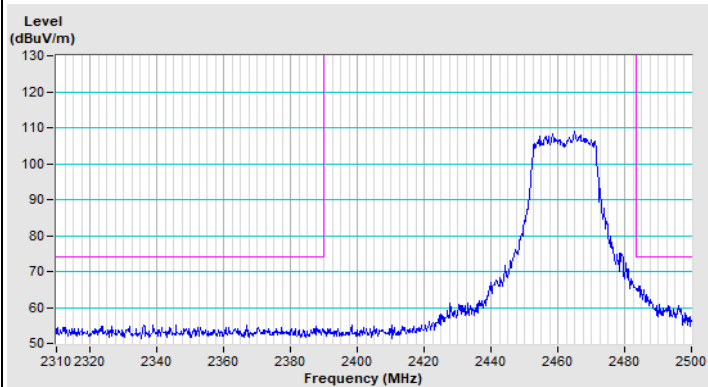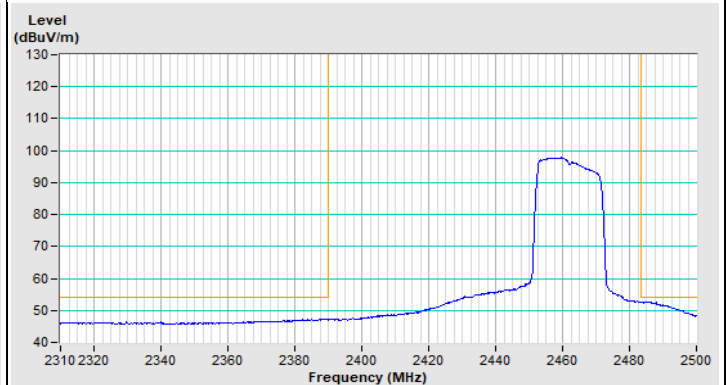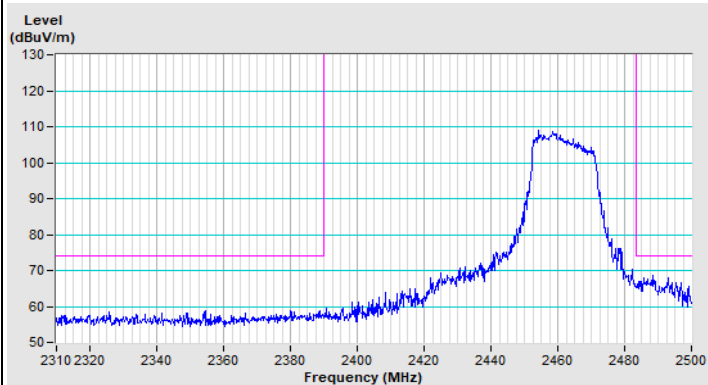





802.11ax (HE20) Channel 12

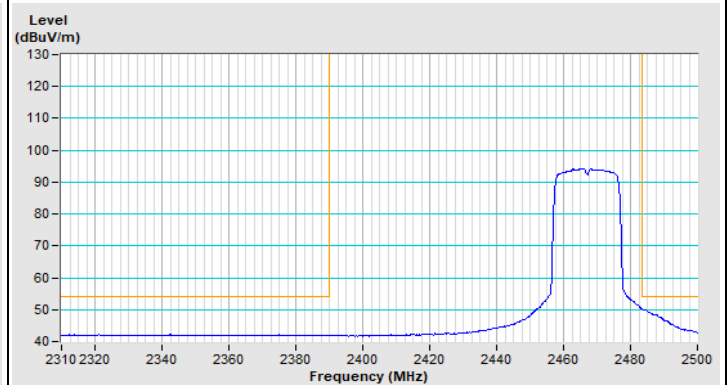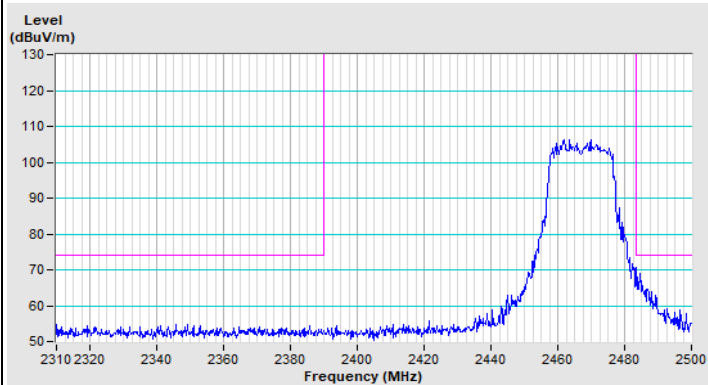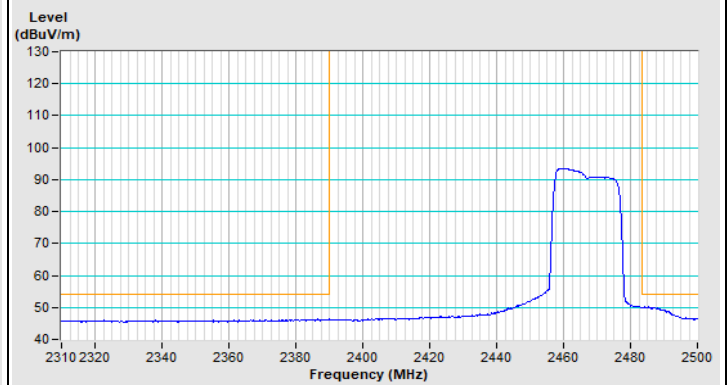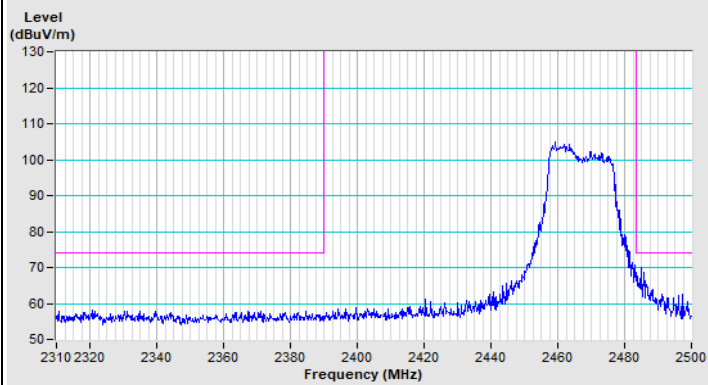





802.11ax (HE20) Channel 13

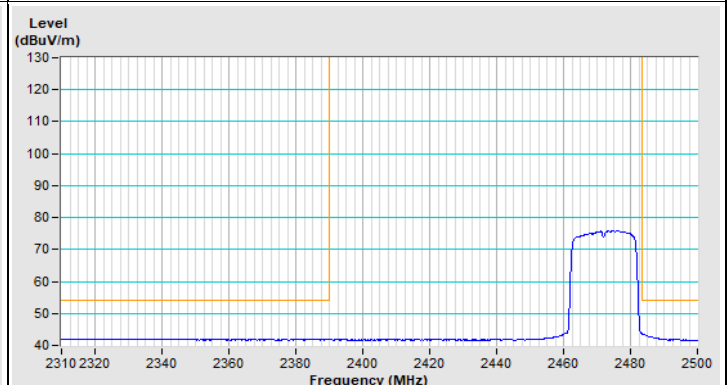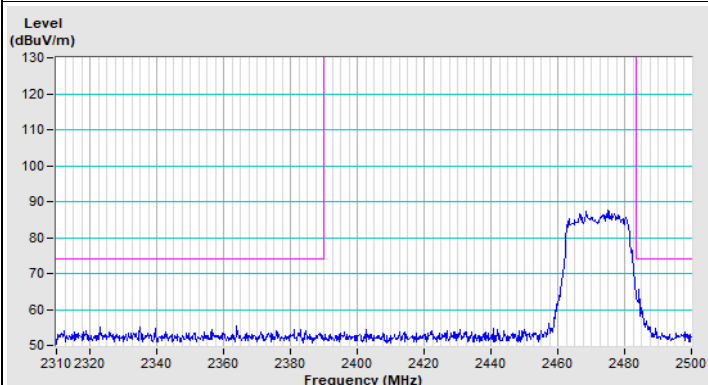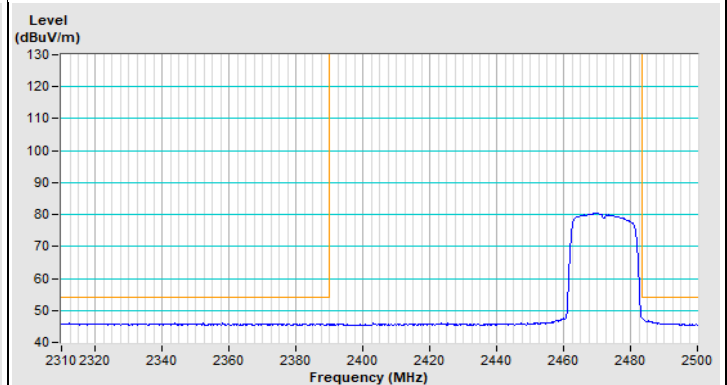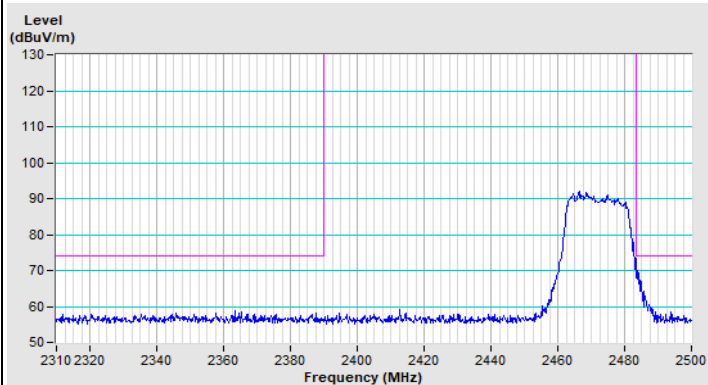


802.11ax (HE40) Channel 3

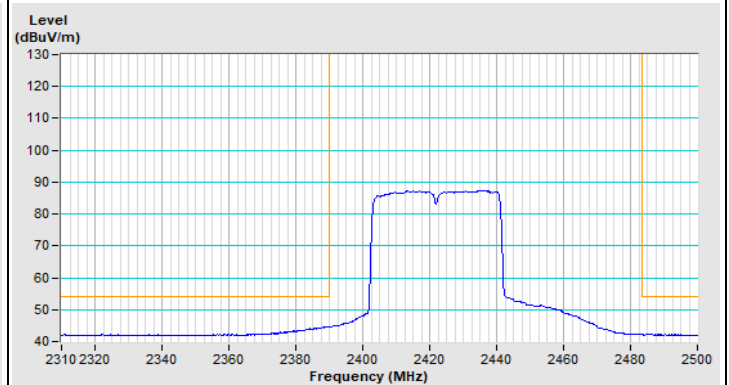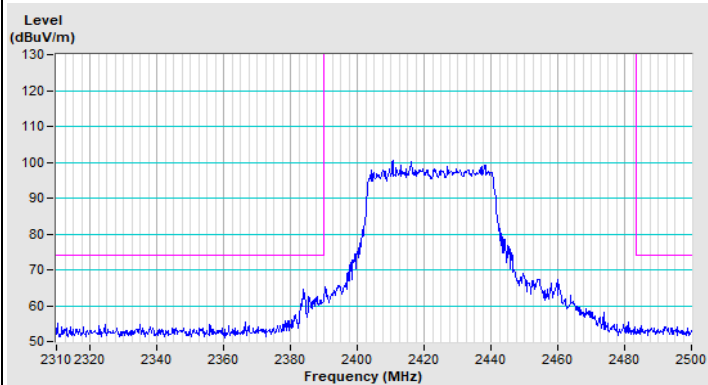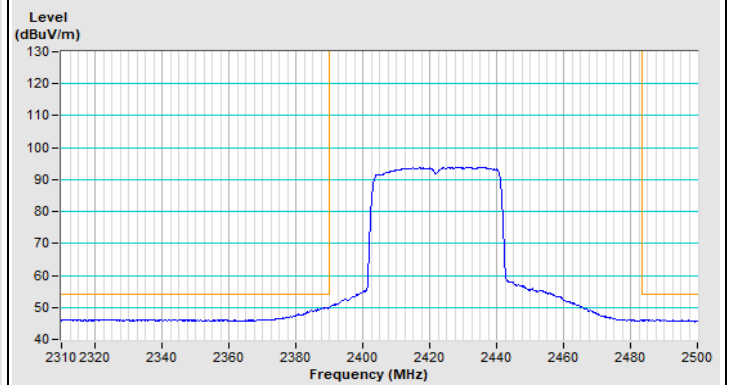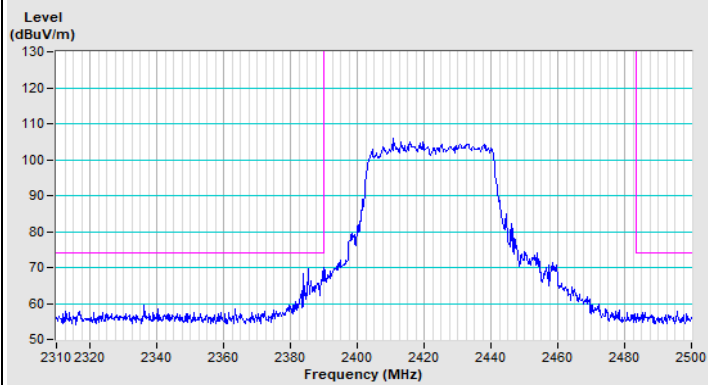


802.11ax (HE40) Channel 9

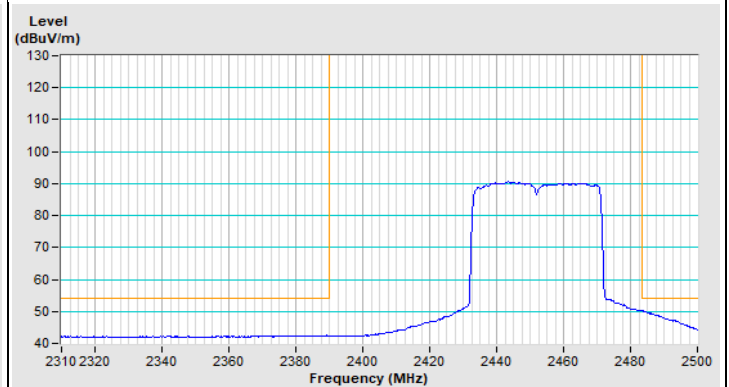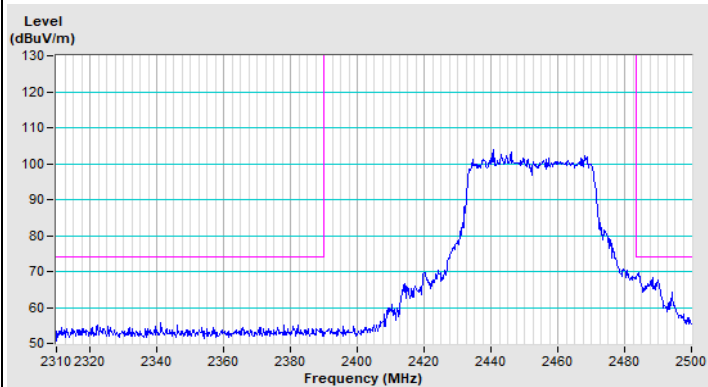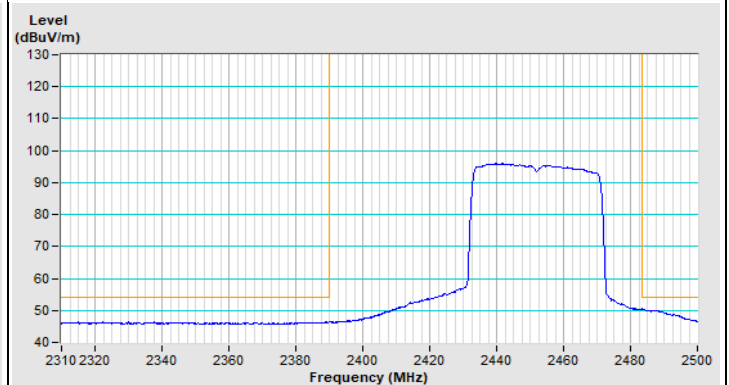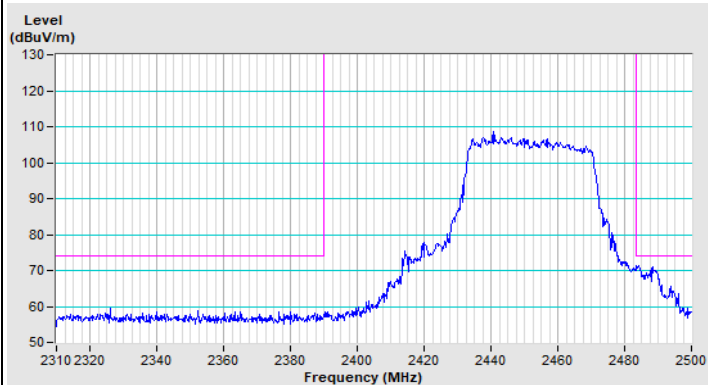


802.11ax (HE40) Channel 10

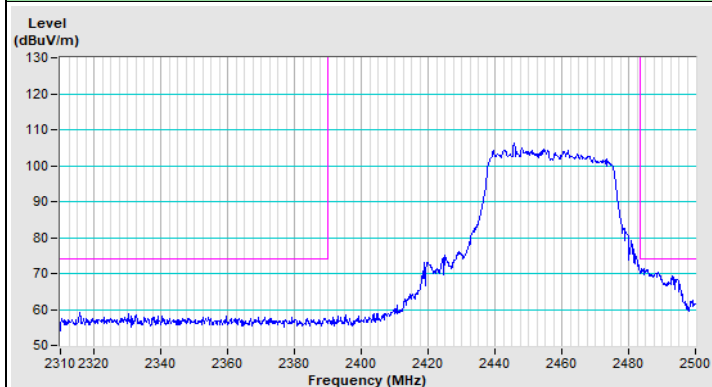


Horizontal (Peak)

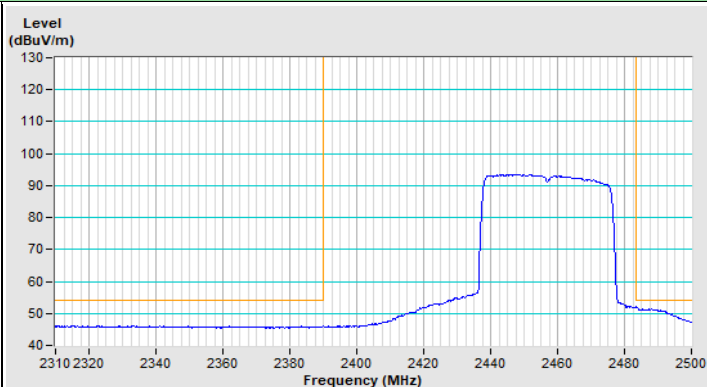

Horizontal (Average)

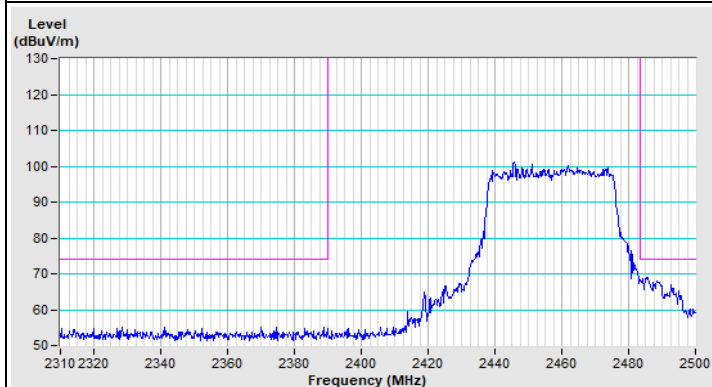


Vertical (Peak)

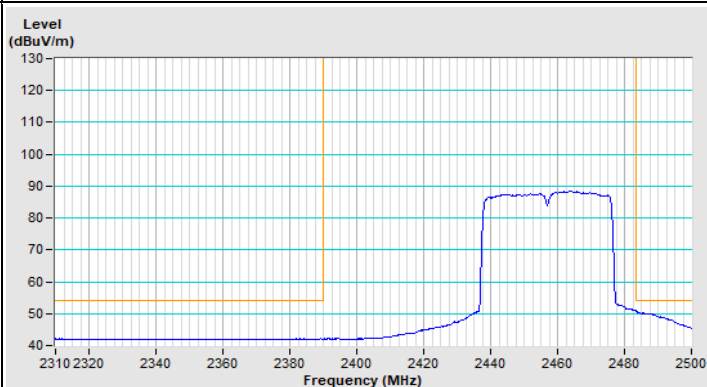


Vertical (Average)


802.11ax (HE40) Channel 11

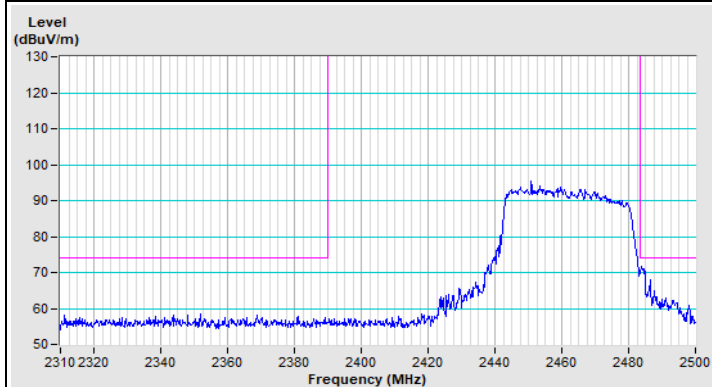


Horizontal (Peak)

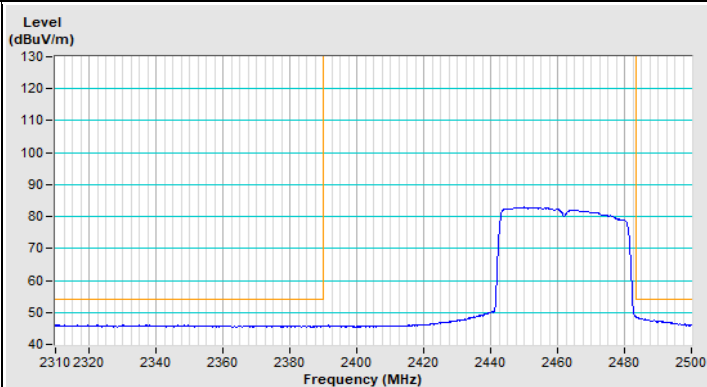

Horizontal (Average)




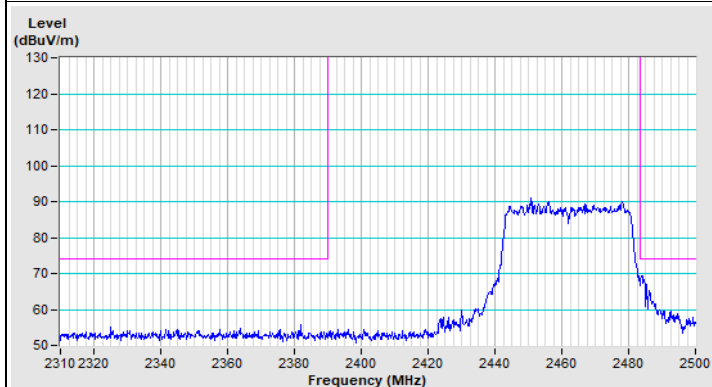


Vertical (Peak)




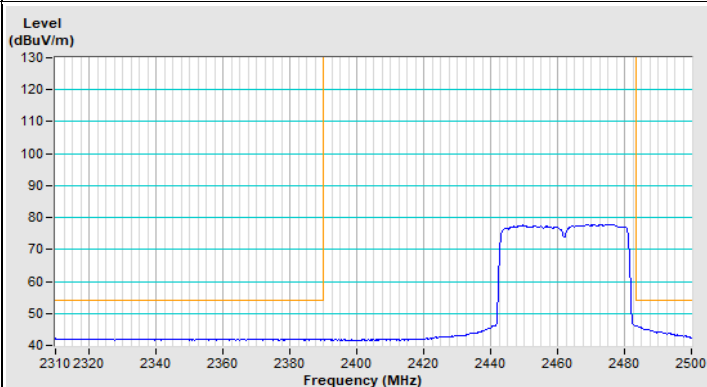


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 1

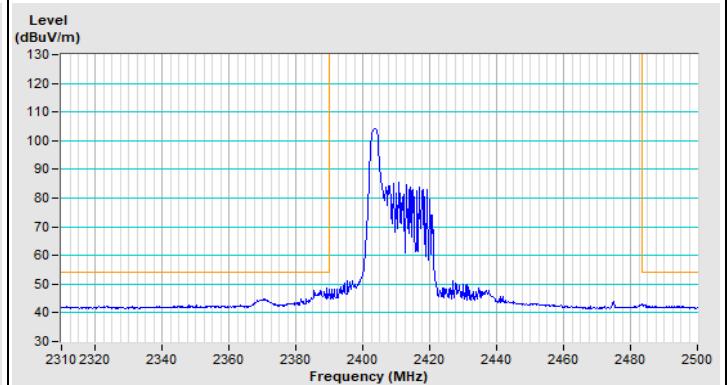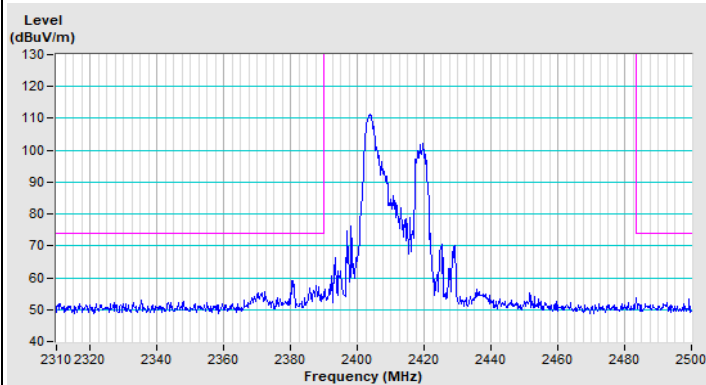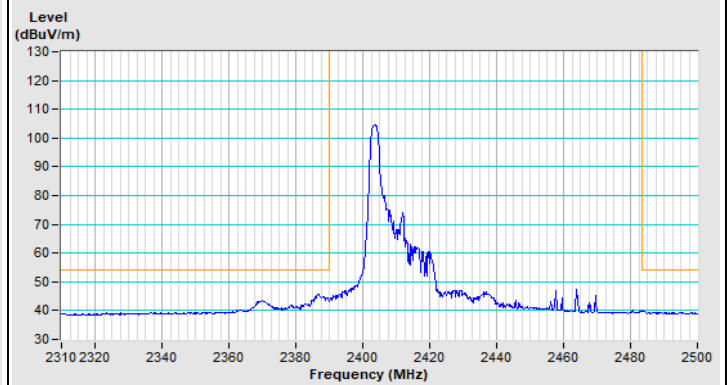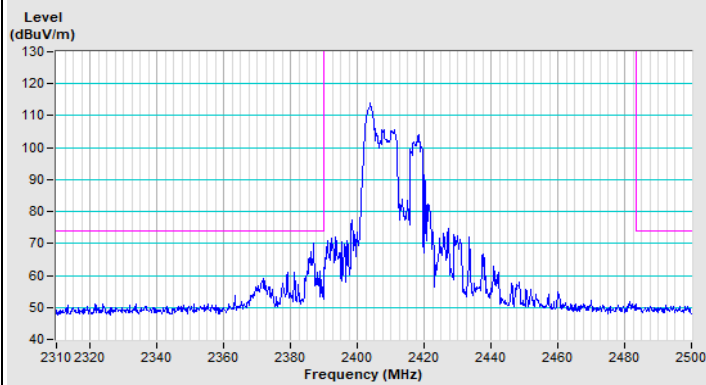


802.11ax (HE20) 26-tone RU Channel 11

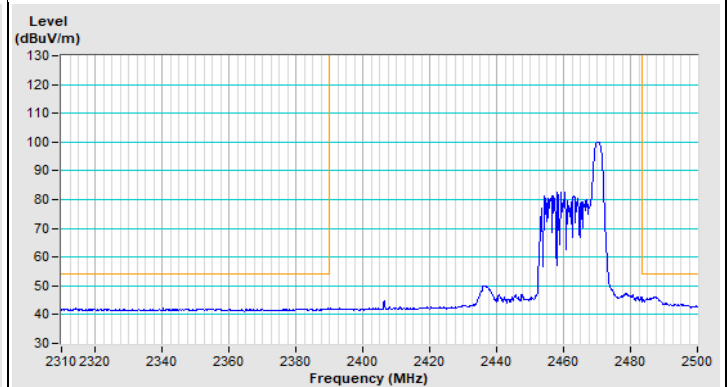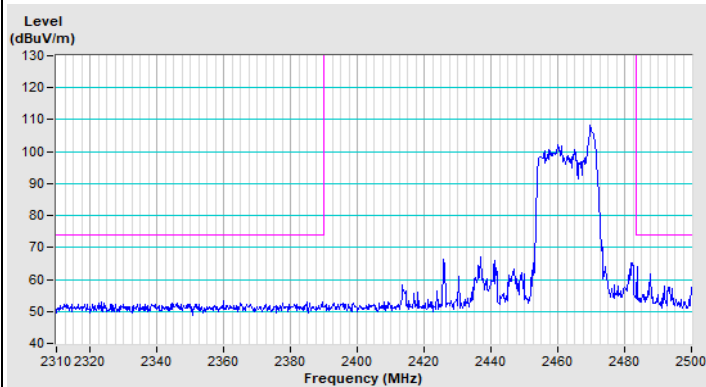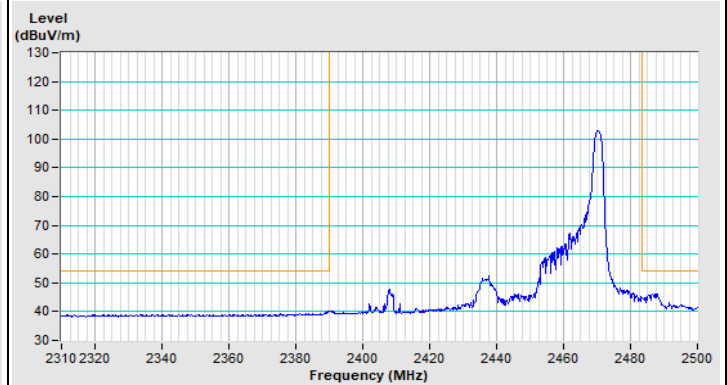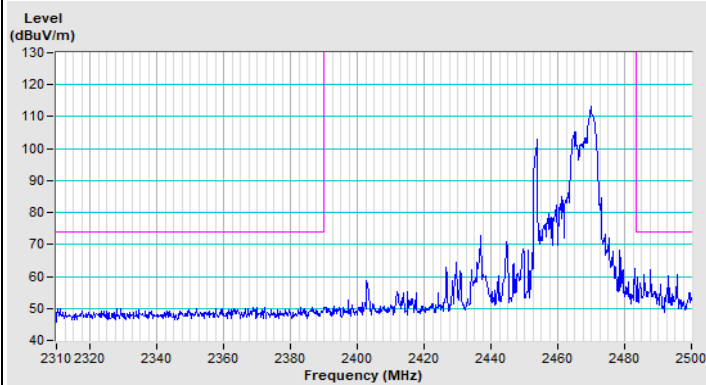


802.11ax (HE20) 26-tone RU Channel 12

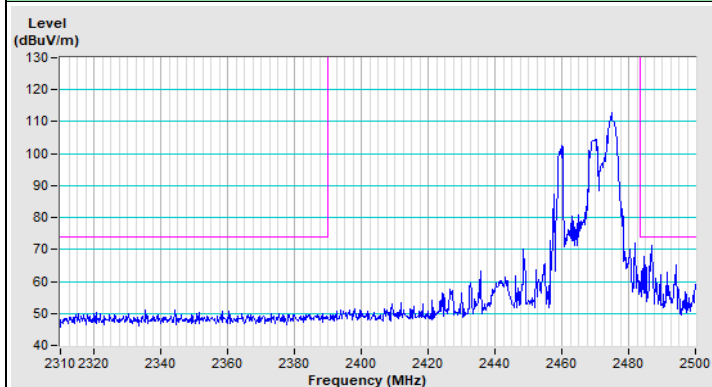


Horizontal (Peak)

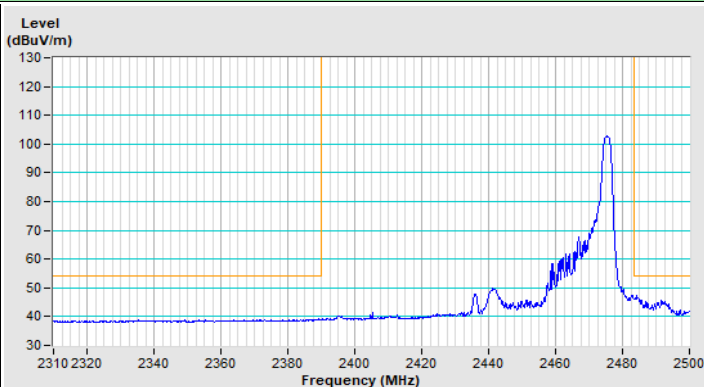

Horizontal (Average)

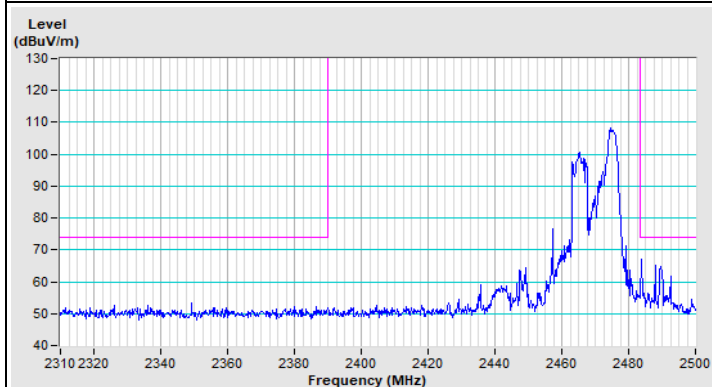


Vertical (Peak)

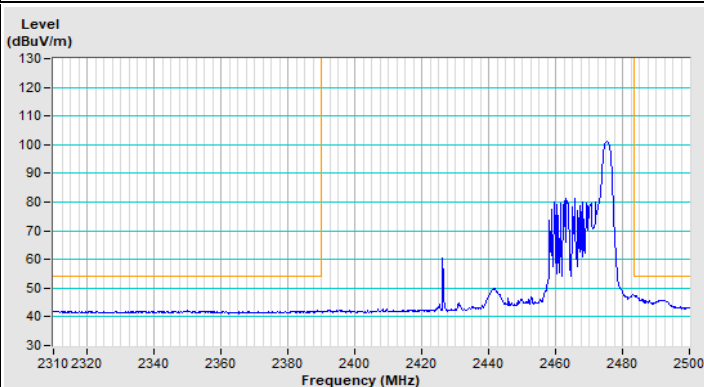


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 13

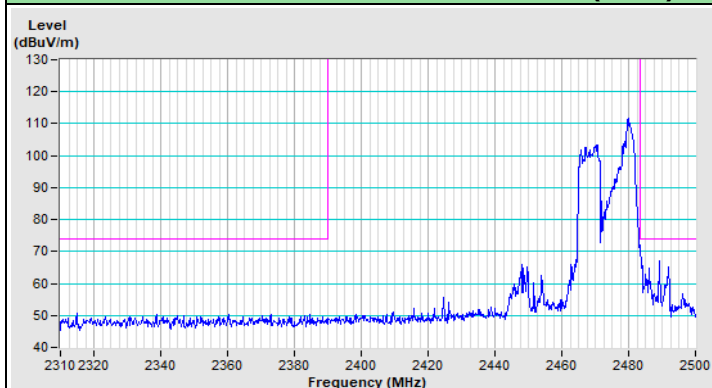


Horizontal (Peak)

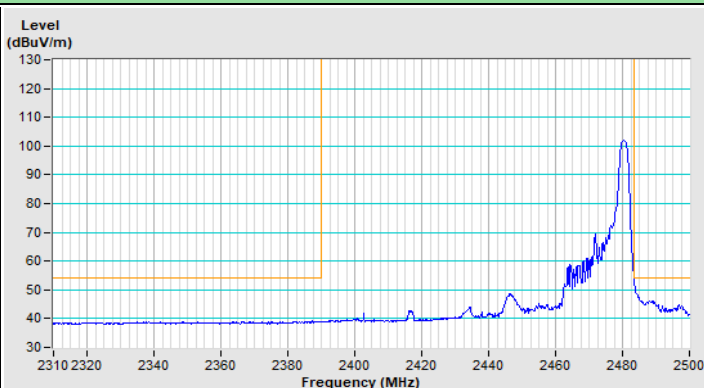

Horizontal (Average)

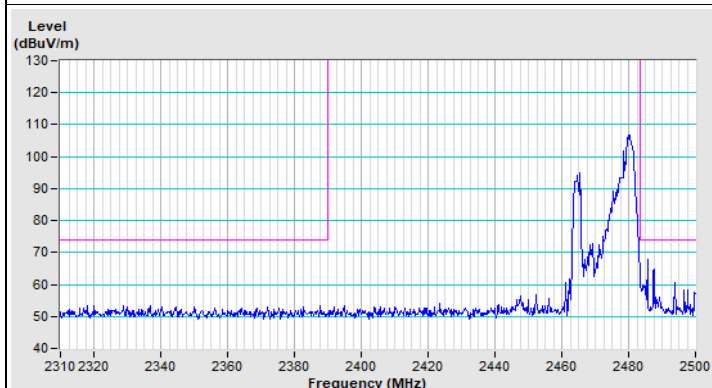


Vertical (Peak)

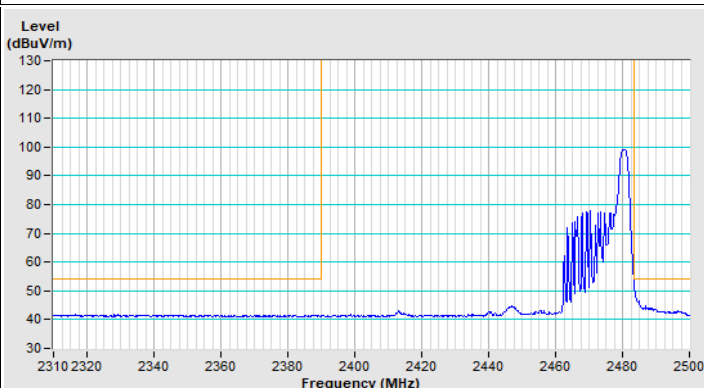


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 1

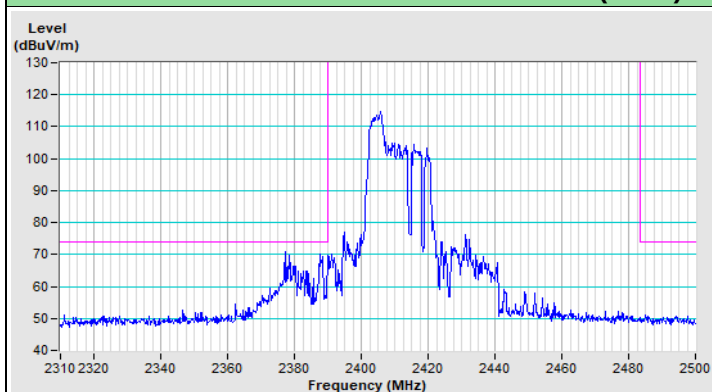


Horizontal (Peak)

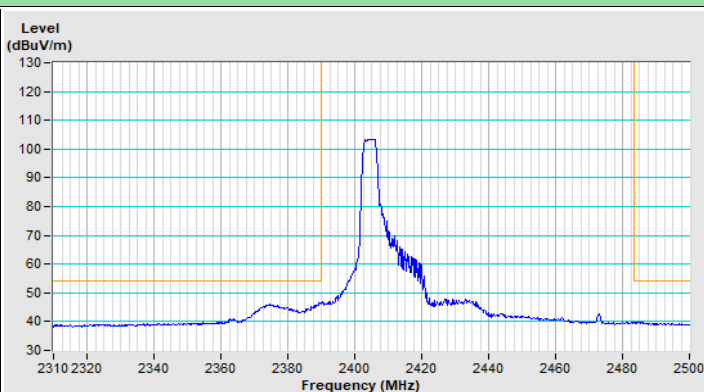

Horizontal (Average)

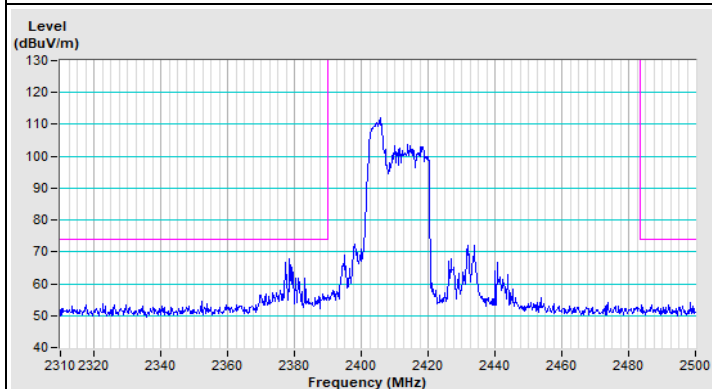


Vertical (Peak)

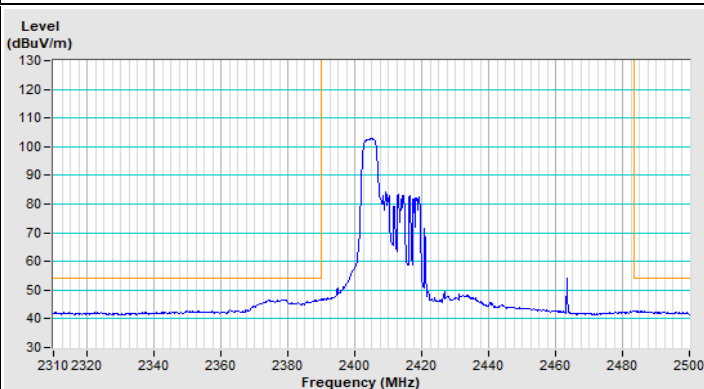


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 11

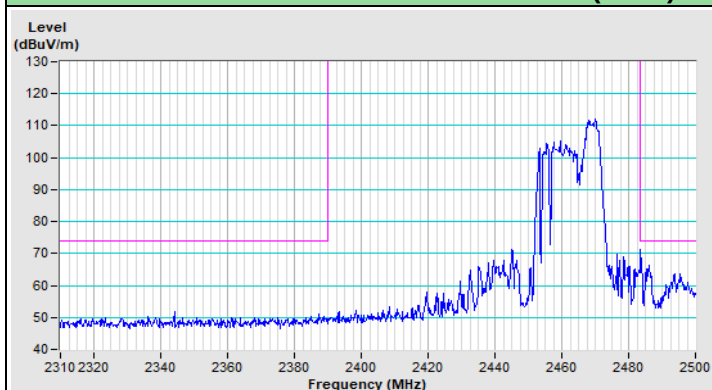


Horizontal (Peak)

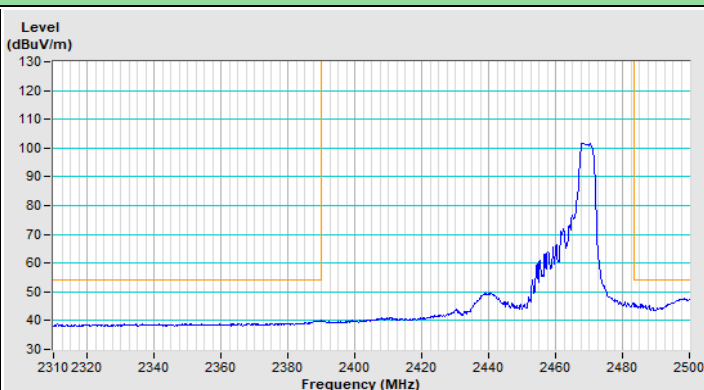

Horizontal (Average)

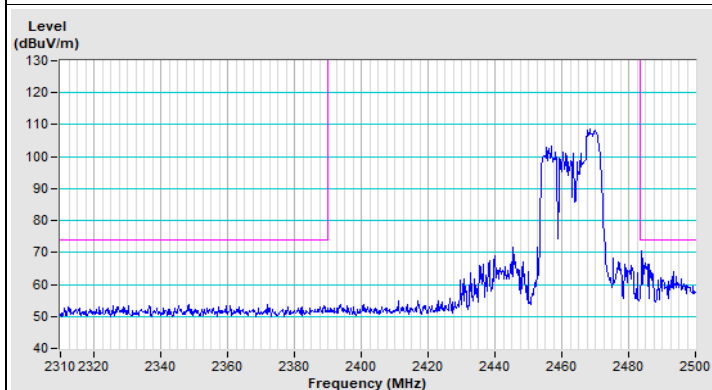


Vertical (Peak)

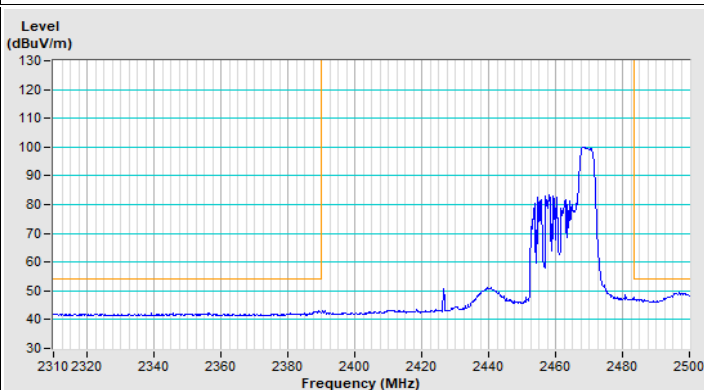


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 12

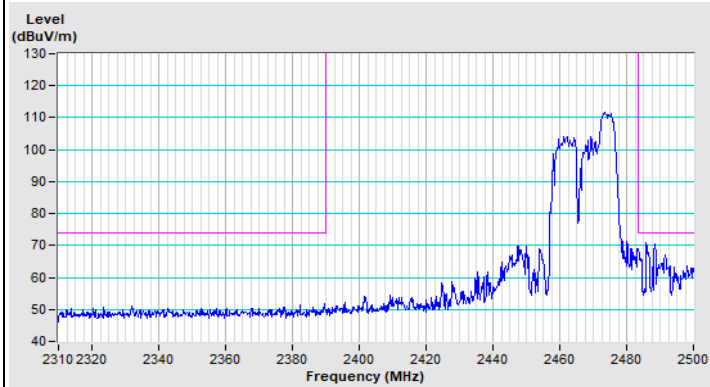


Horizontal (Peak)

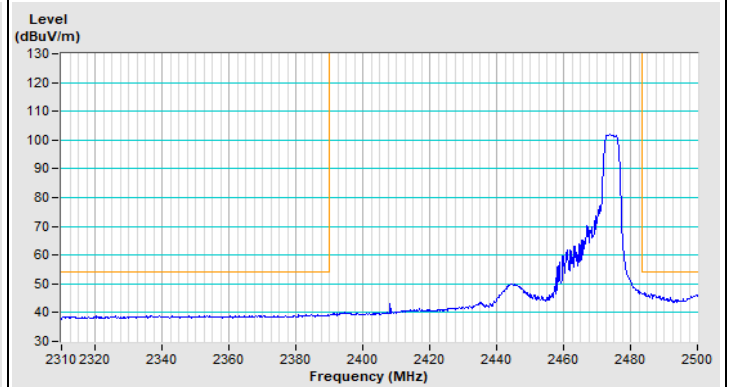

Horizontal (Average)

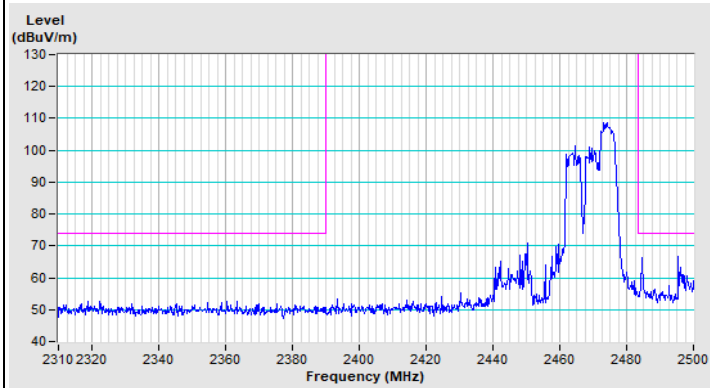


Vertical (Peak)

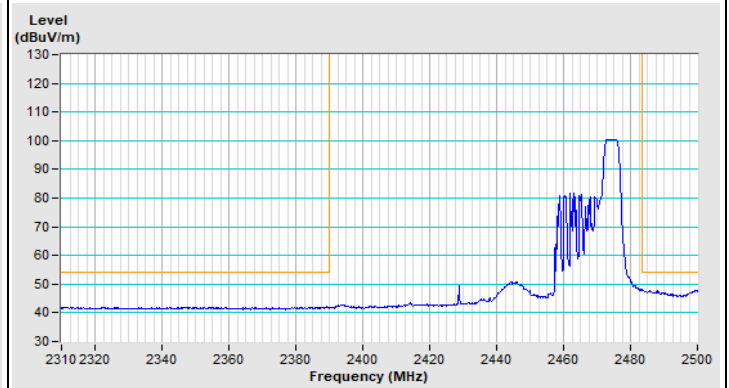


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 13

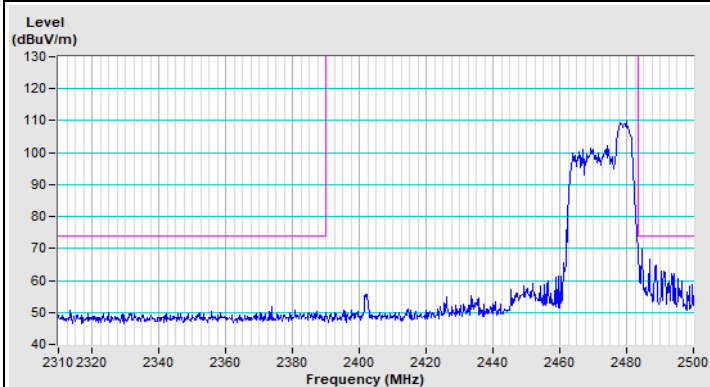


Horizontal (Peak)

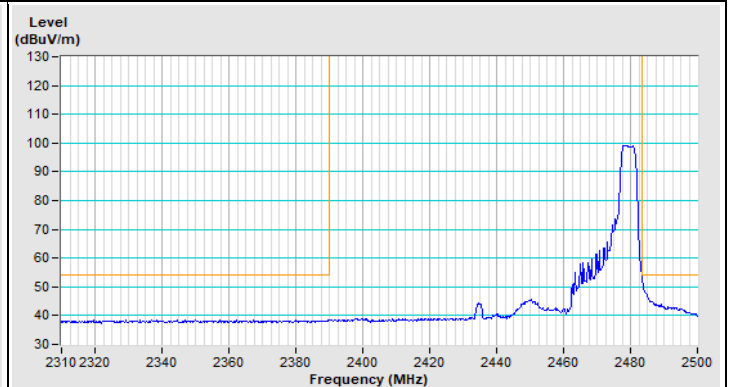

Horizontal (Average)

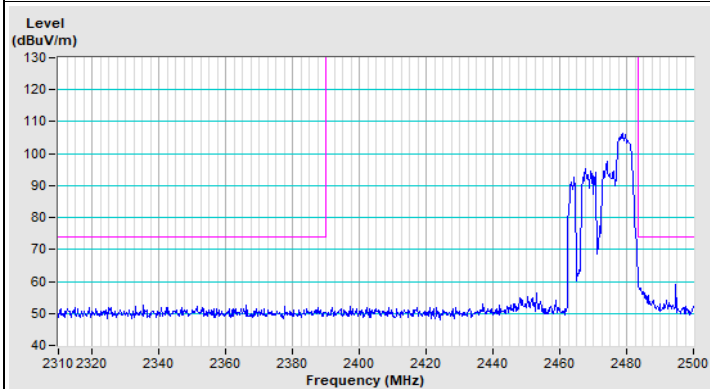


Vertical (Peak)

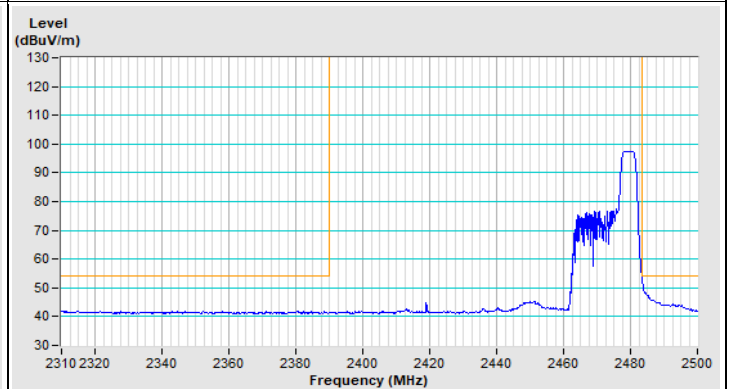


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 1

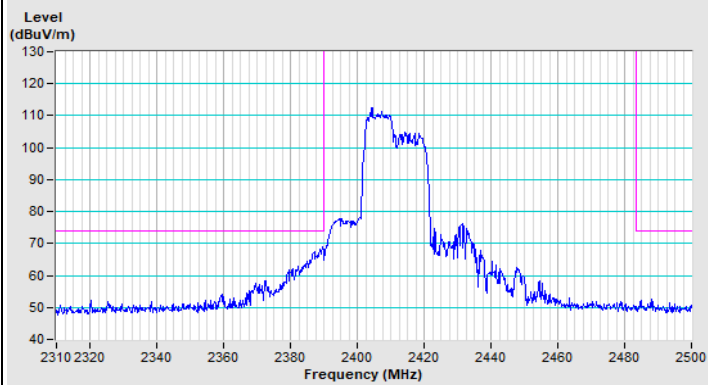


Horizontal (Peak)

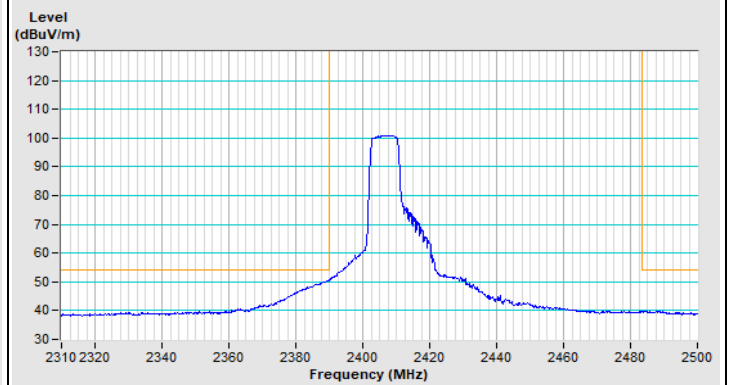

Horizontal (Average)

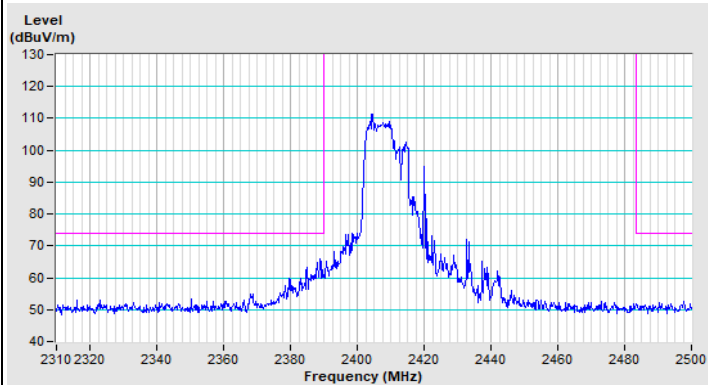


Vertical (Peak)

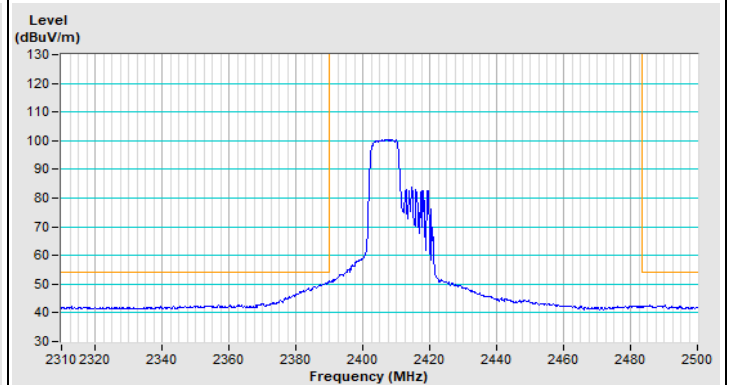


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 11

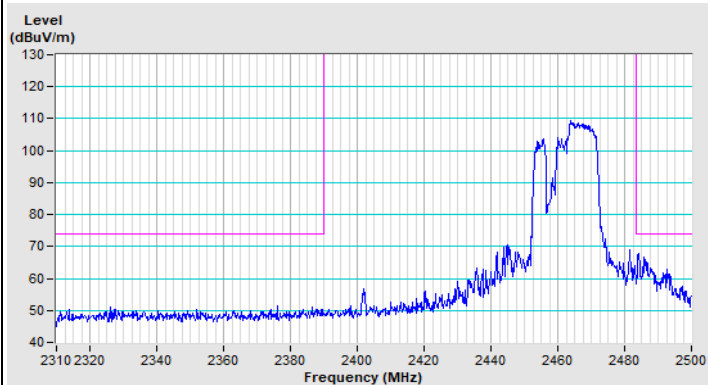


Horizontal (Peak)

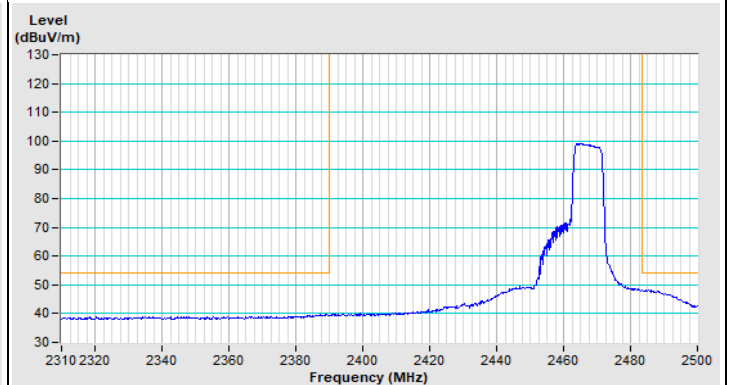

Horizontal (Average)

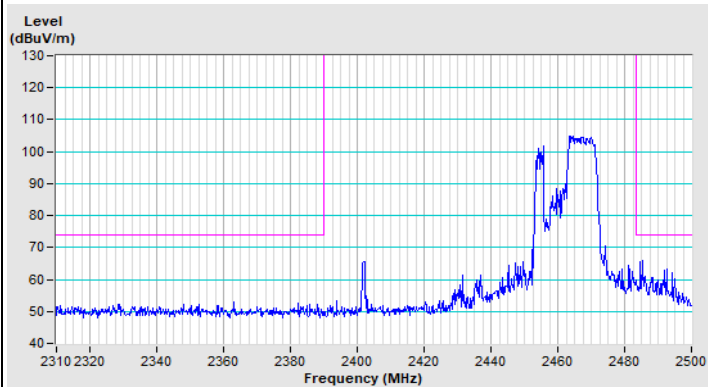


Vertical (Peak)

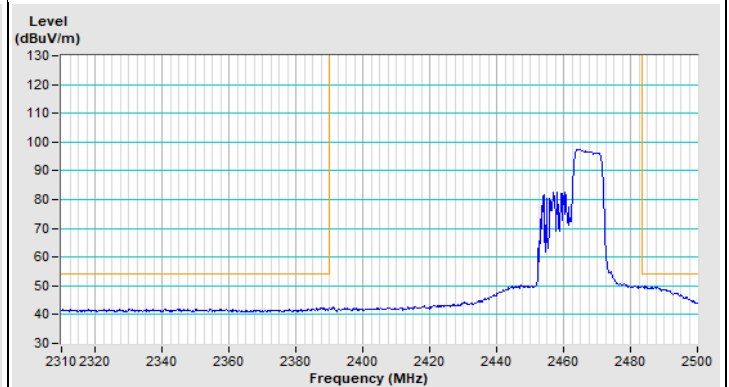


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 12

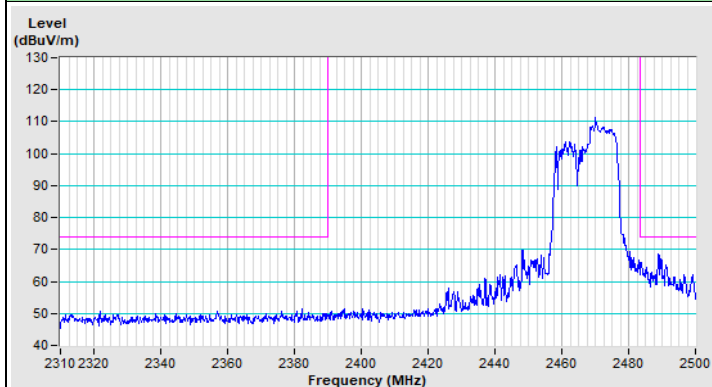


Horizontal (Peak)

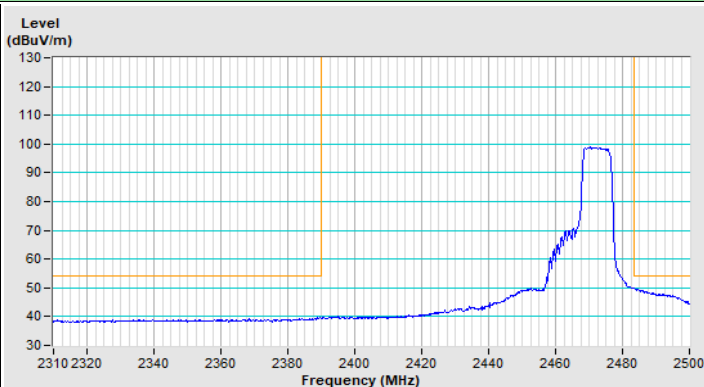

Horizontal (Average)

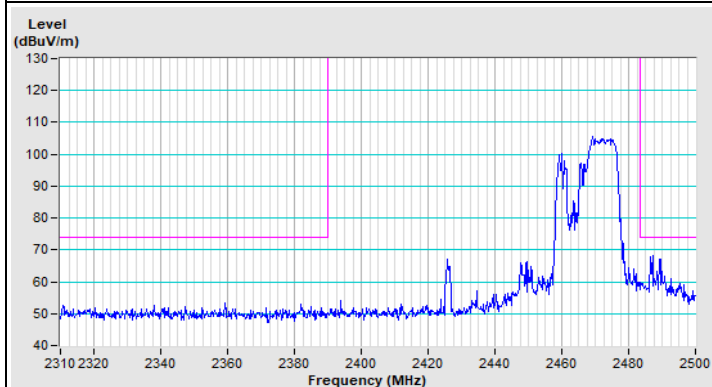


Vertical (Peak)

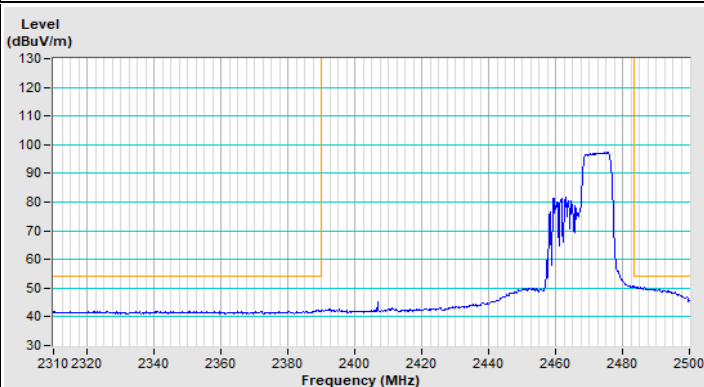


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 13

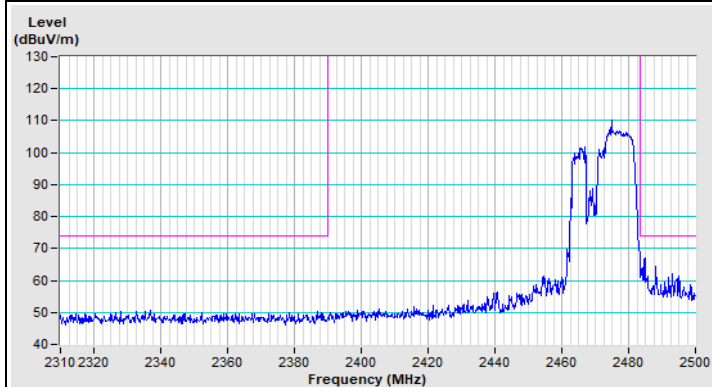


Horizontal (Peak)

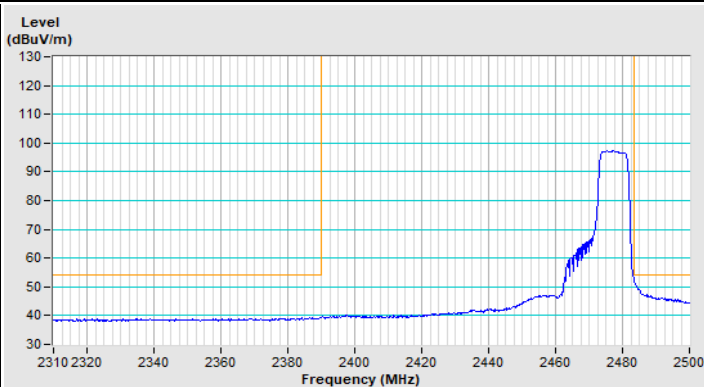

Horizontal (Average)

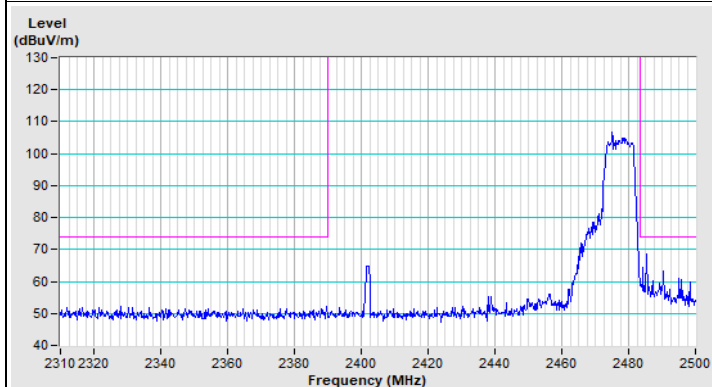


Vertical (Peak)

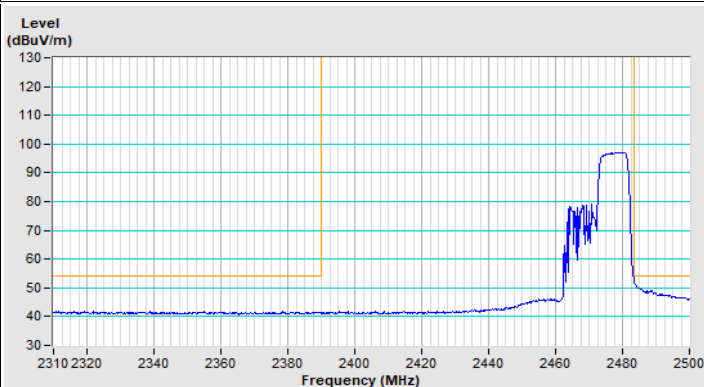


Vertical (Average)

Plot of Band Edge Mode C


802.11b Channel 1

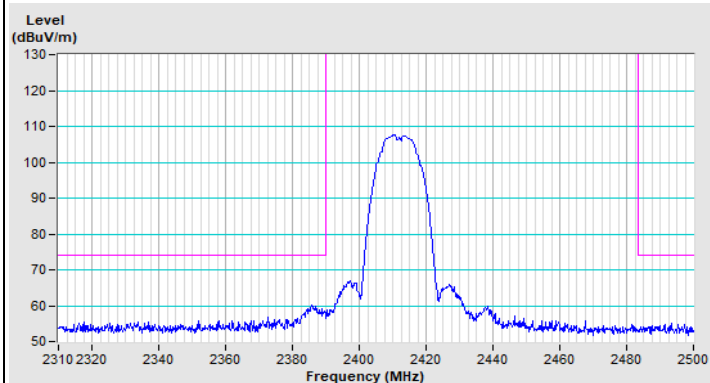


Horizontal (Peak)

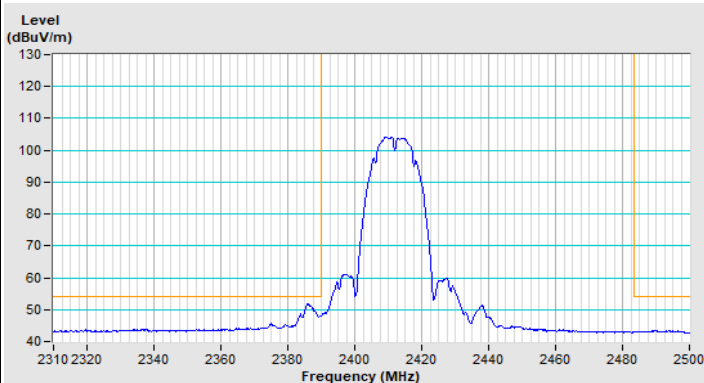

Horizontal (Average)

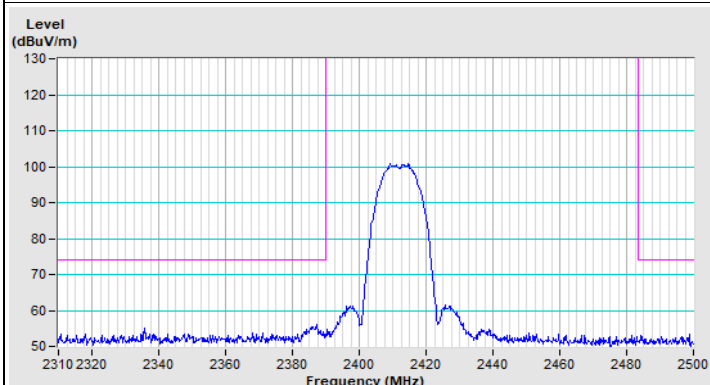


Vertical (Peak)

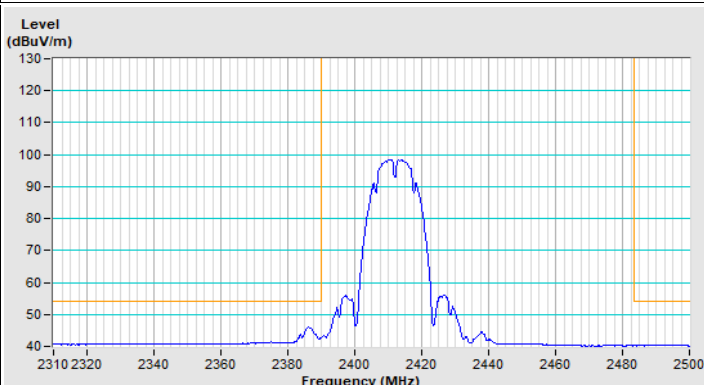


Vertical (Average)


802.11b Channel 11

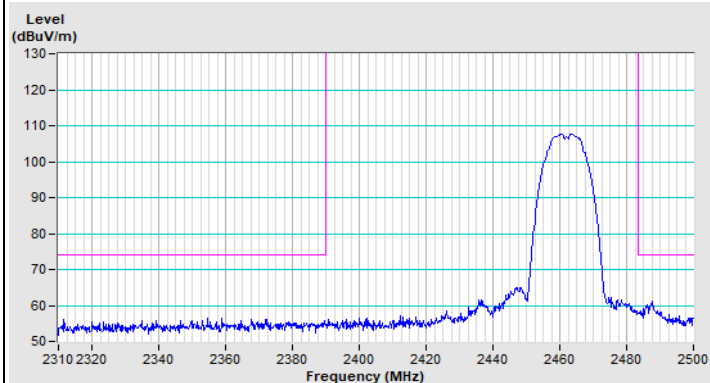


Horizontal (Peak)

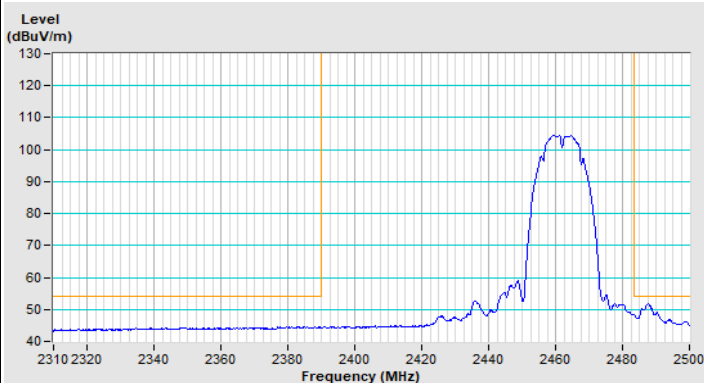

Horizontal (Average)

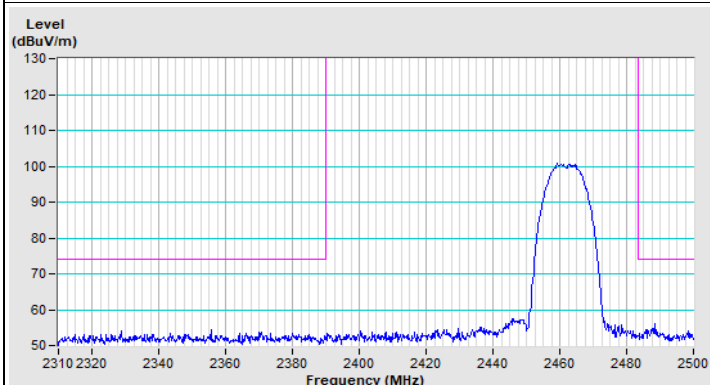


Vertical (Peak)

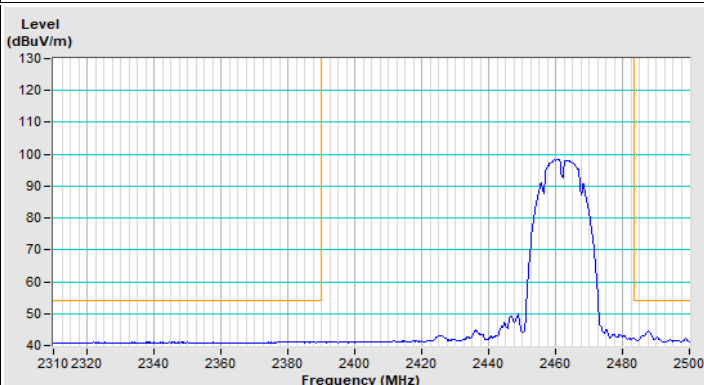


Vertical (Average)


802.11b Channel 12

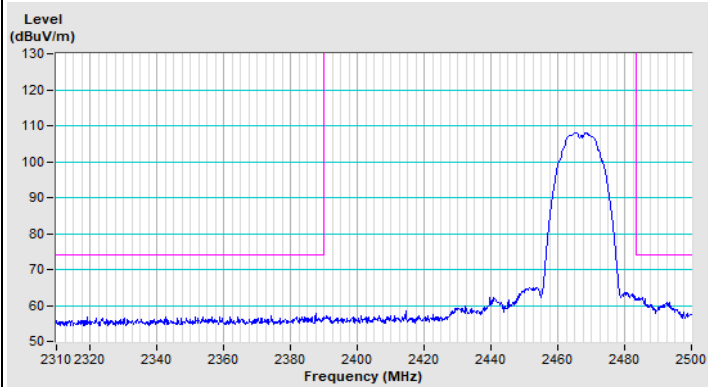


Horizontal (Peak)

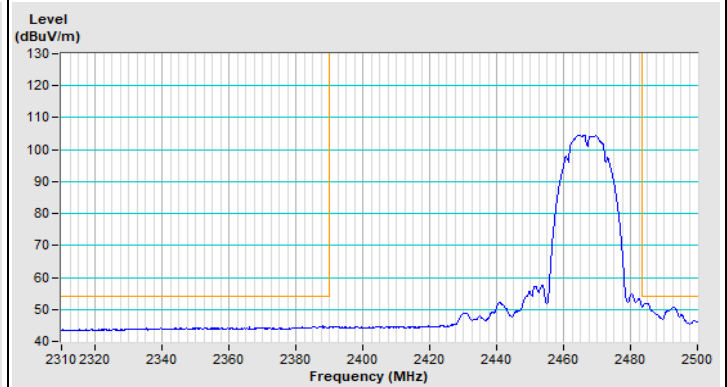

Horizontal (Average)

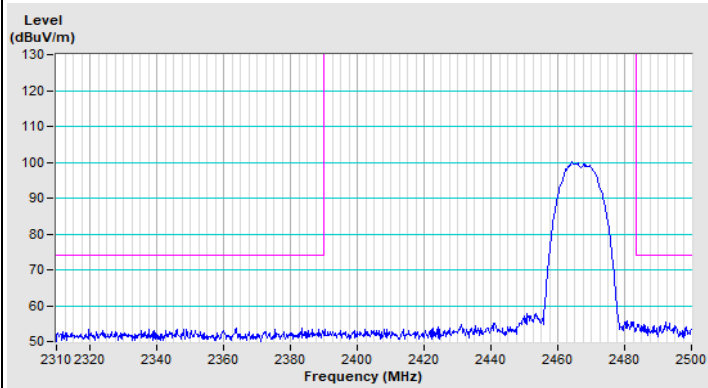


Vertical (Peak)

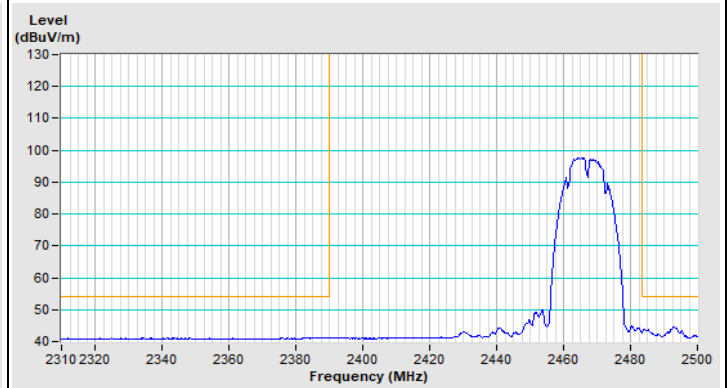


Vertical (Average)


802.11b Channel 13

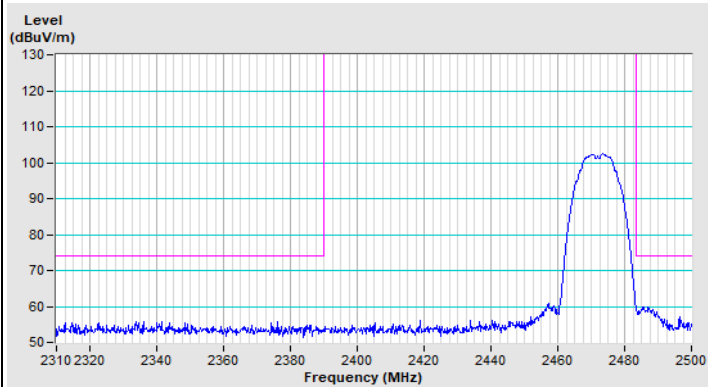


Horizontal (Peak)

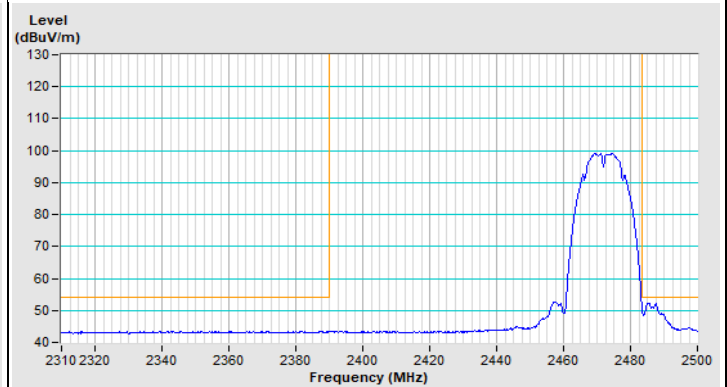

Horizontal (Average)

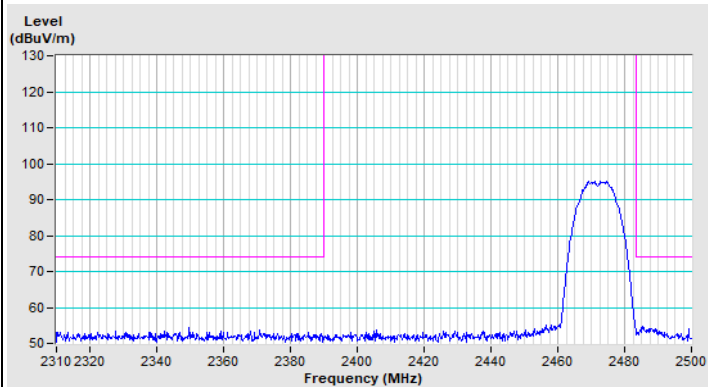


Vertical (Peak)

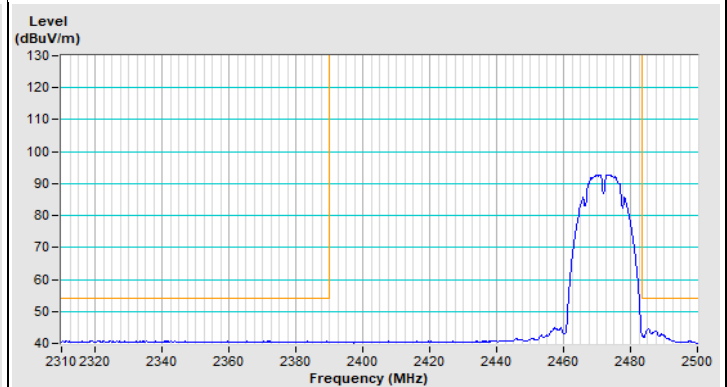


Vertical (Average)


802.11g Channel 1

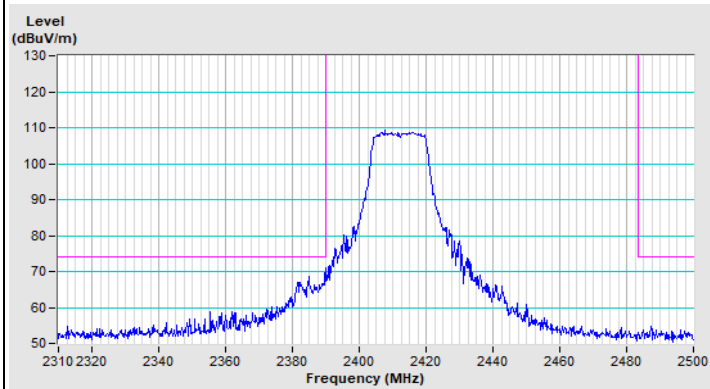


Horizontal (Peak)

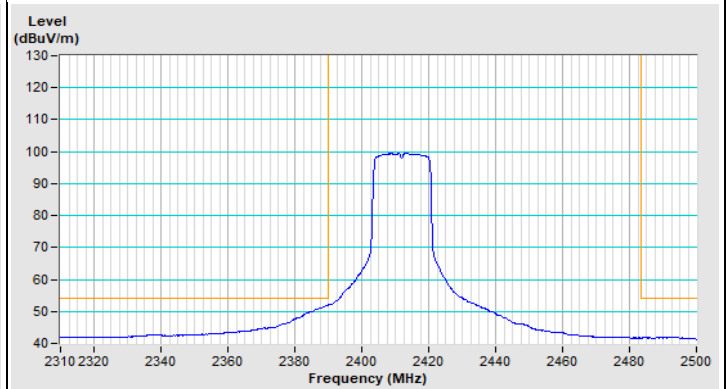

Horizontal (Average)

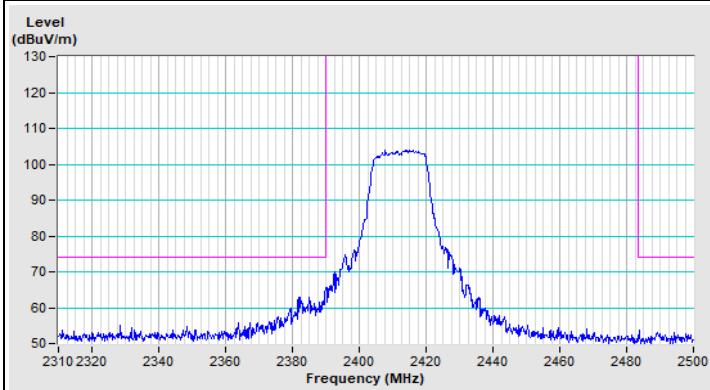


Vertical (Peak)

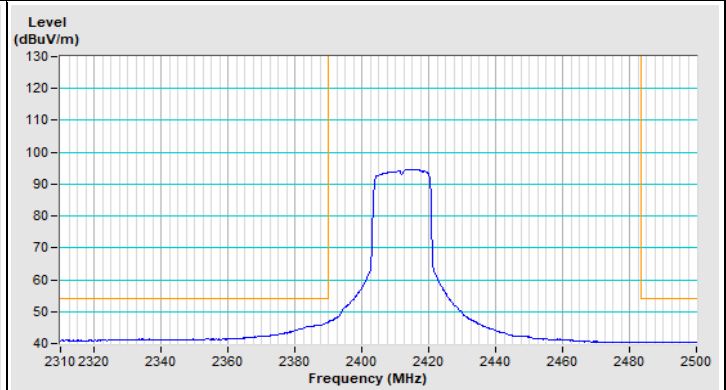


Vertical (Average)


802.11g Channel 11

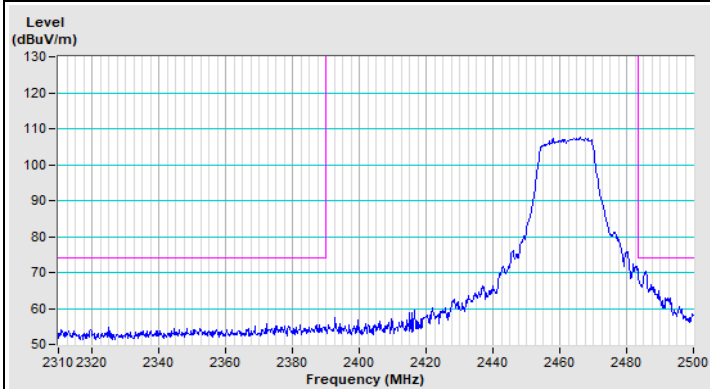


Horizontal (Peak)

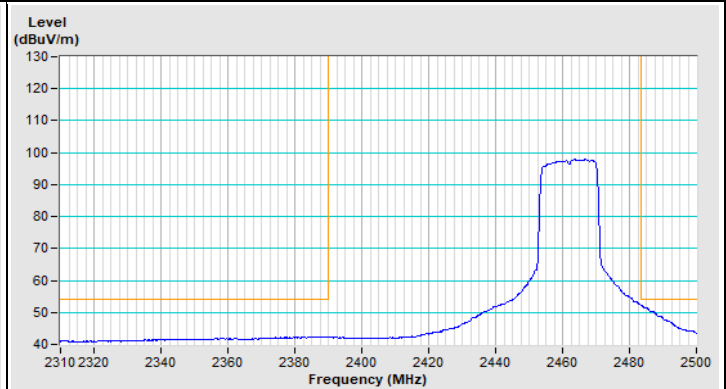

Horizontal (Average)

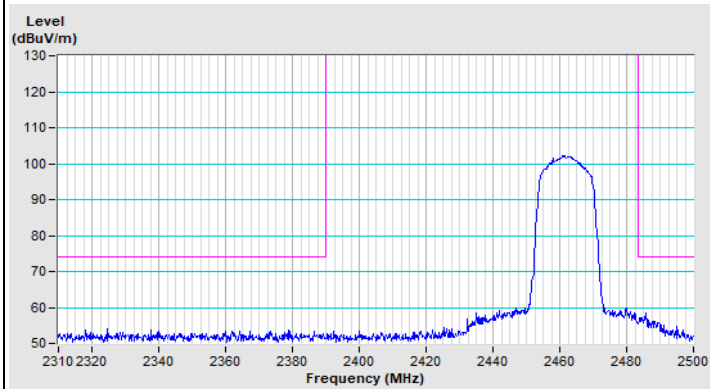


Vertical (Peak)

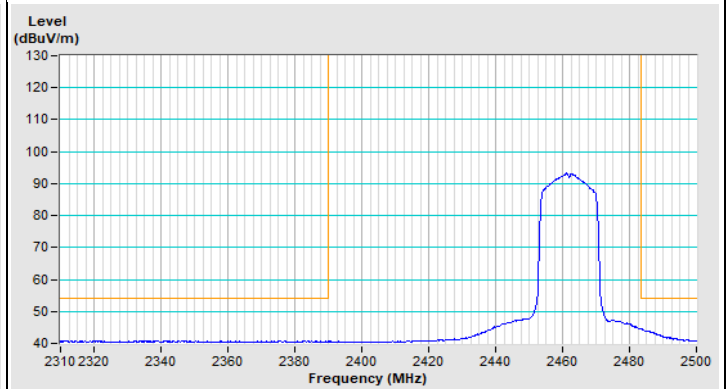


Vertical (Average)


802.11g Channel 12

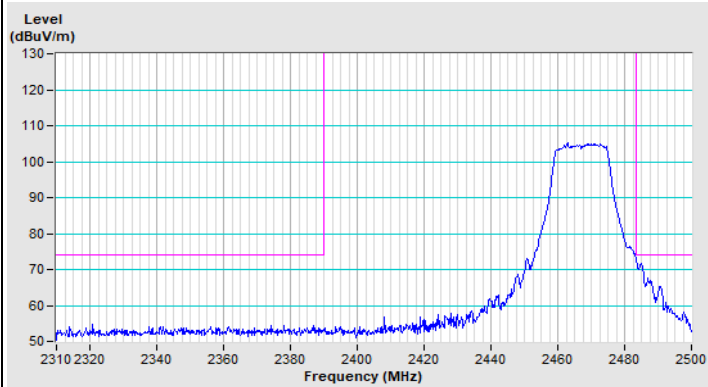


Horizontal (Peak)

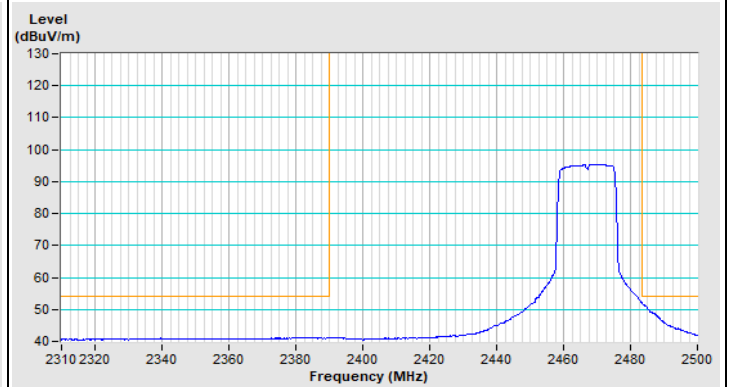

Horizontal (Average)

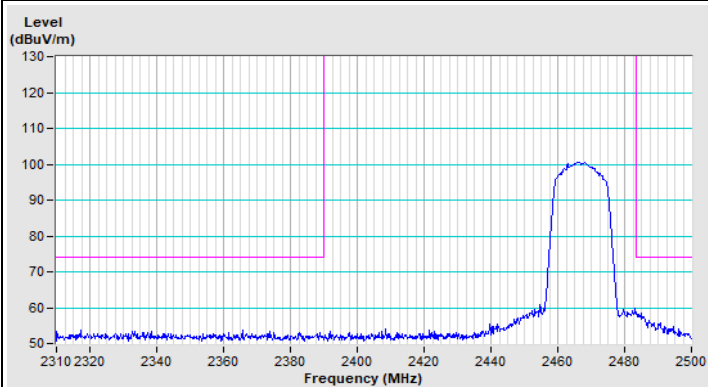


Vertical (Peak)

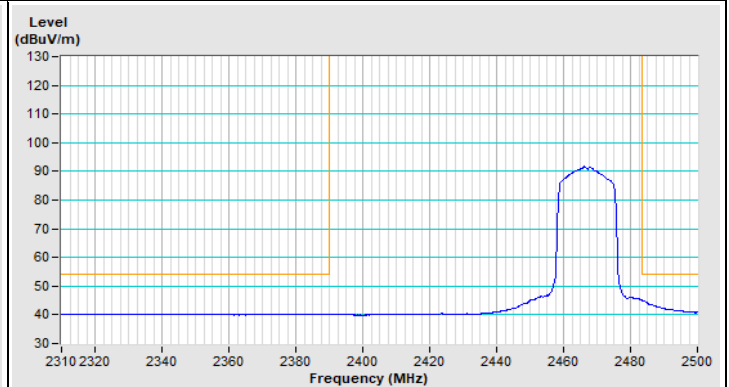


Vertical (Average)


802.11g Channel 13

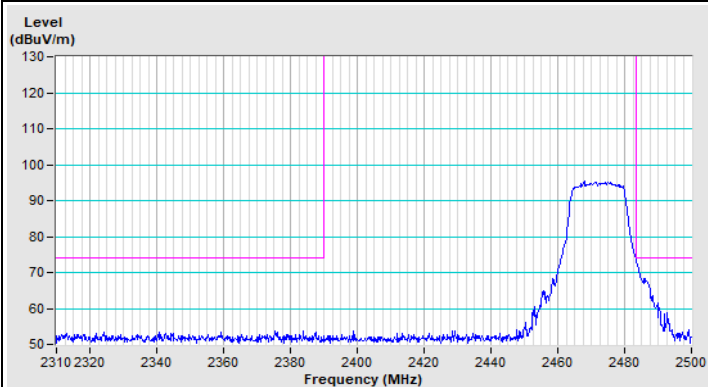


Horizontal (Peak)

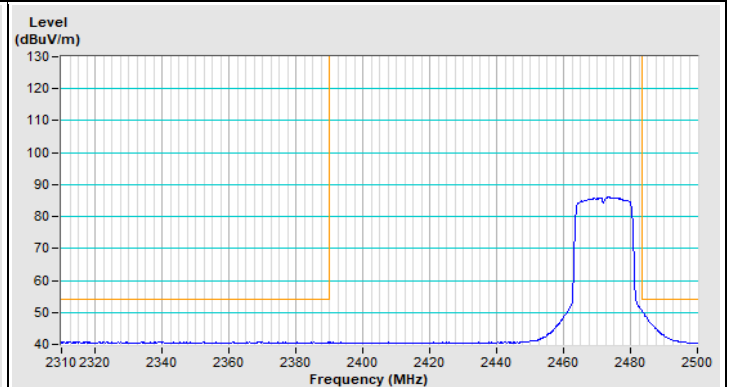

Horizontal (Average)




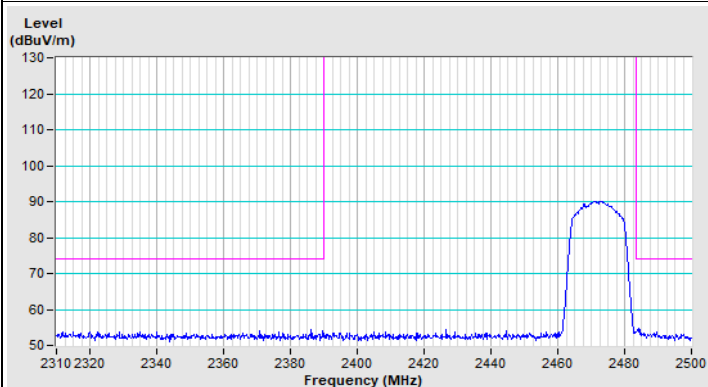


Vertical (Peak)




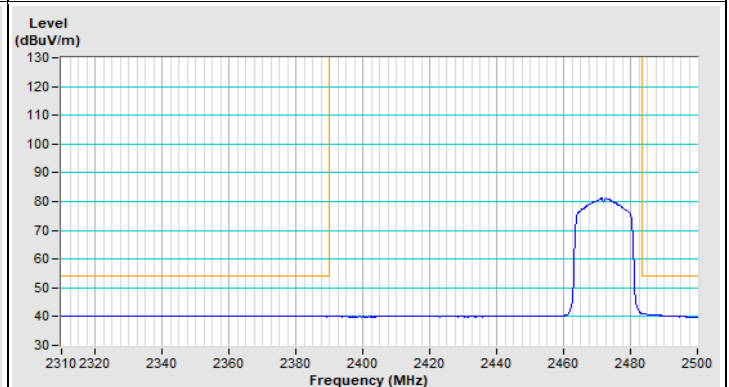


Vertical (Average)





802.11ax (HE20) Channel 1

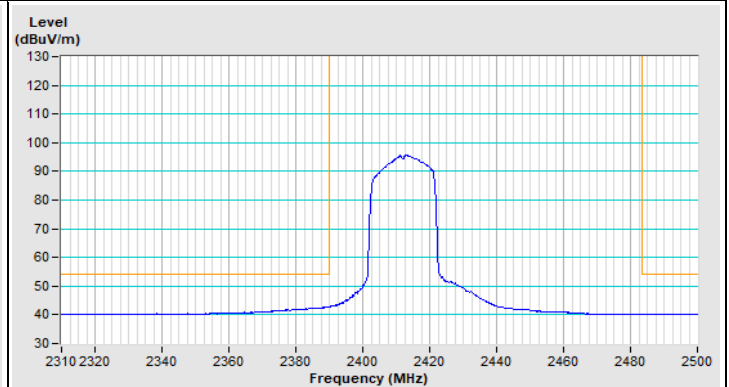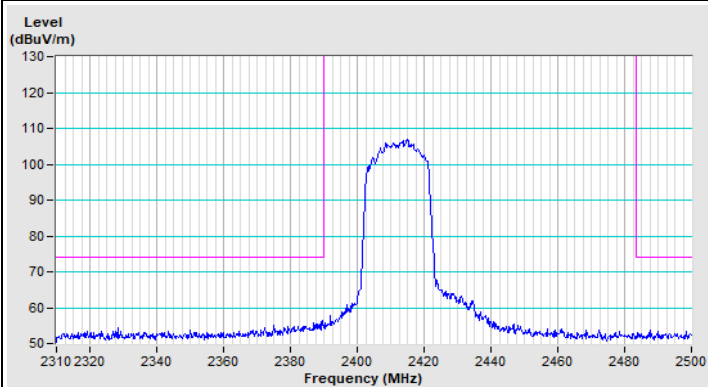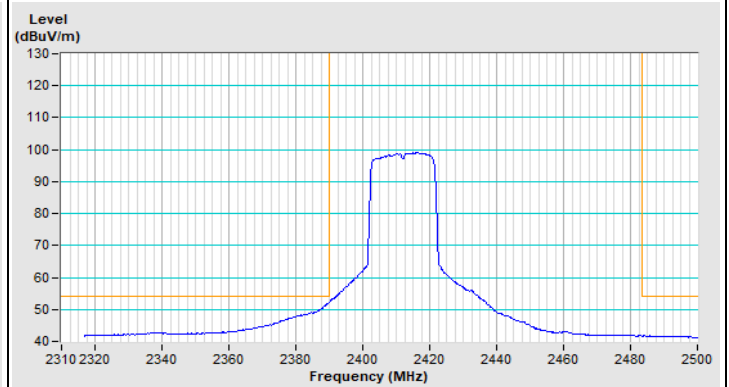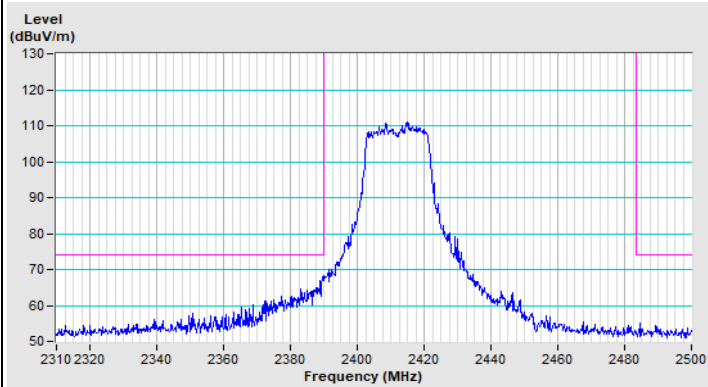





802.11ax (HE20) Channel 11

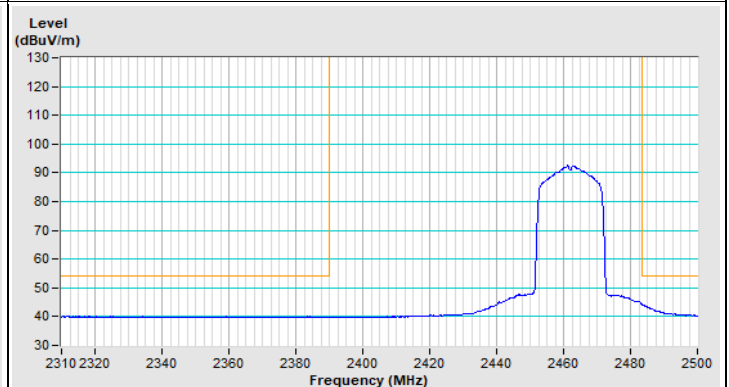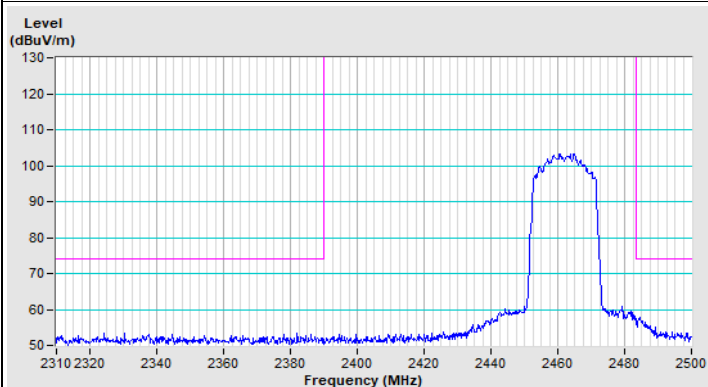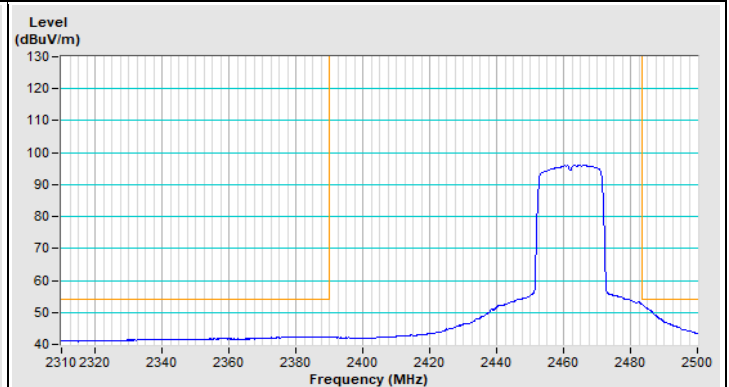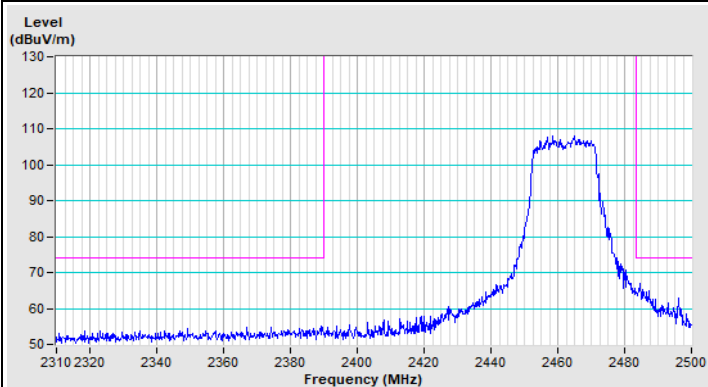





802.11ax (HE20) Channel 12

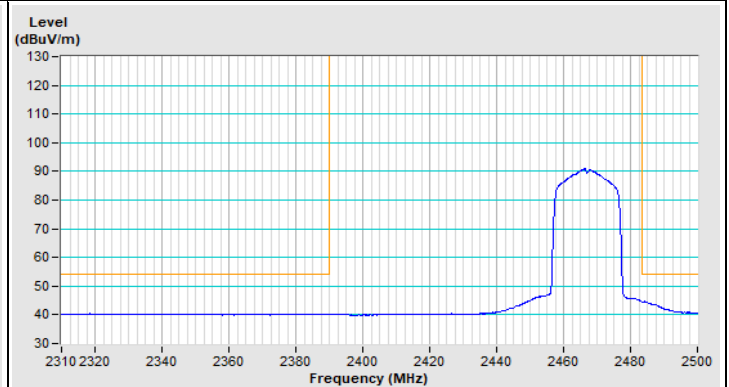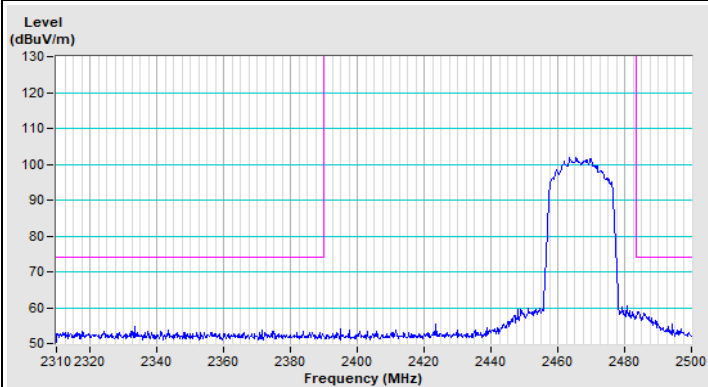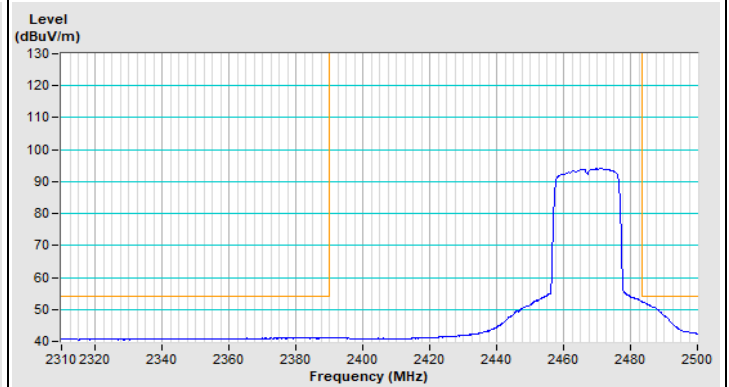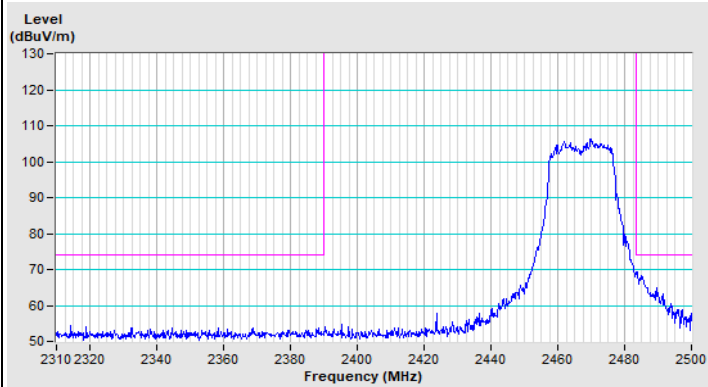





802.11ax (HE20) Channel 13

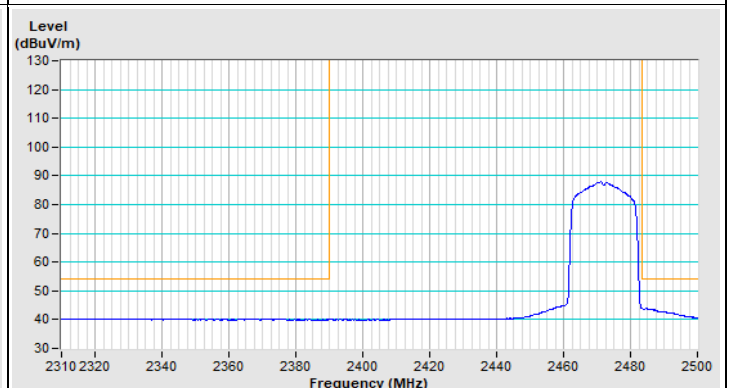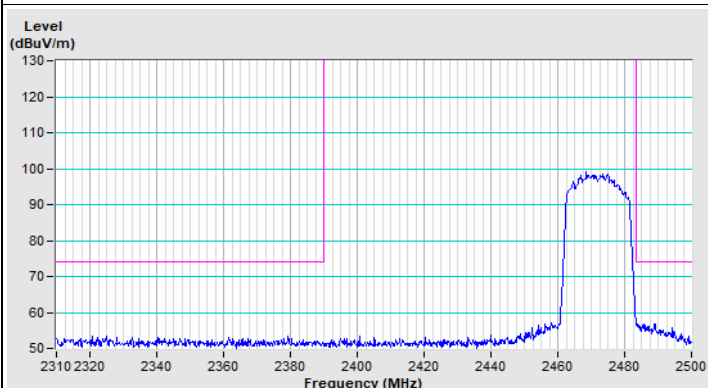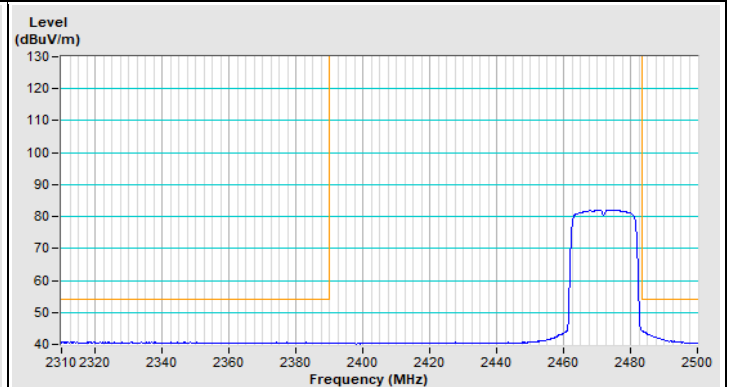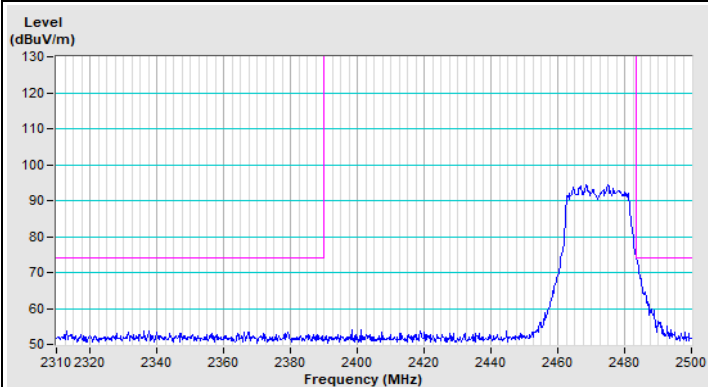


802.11ax (HE40) Channel 3

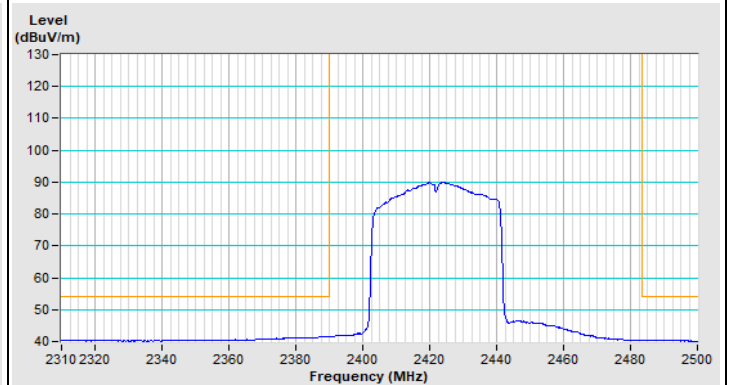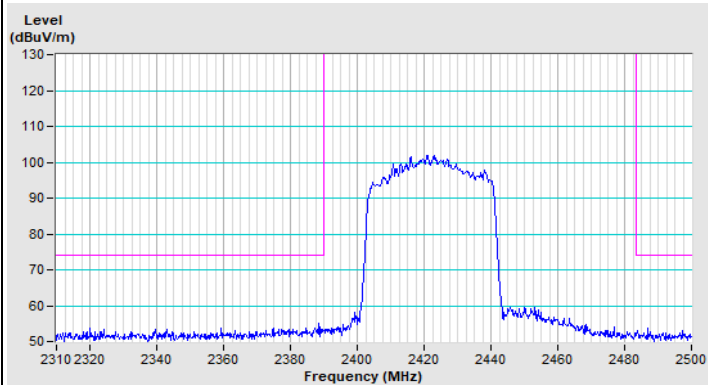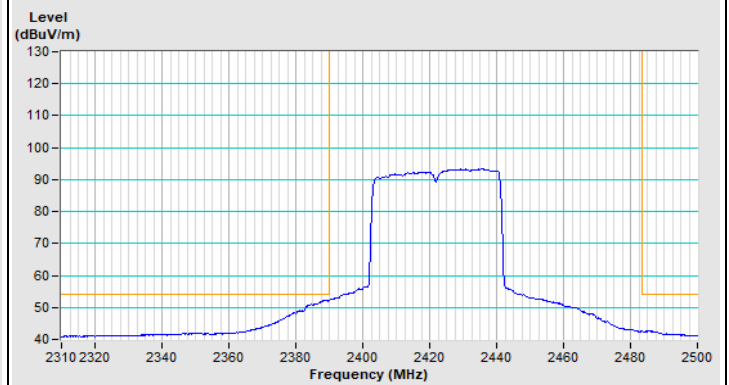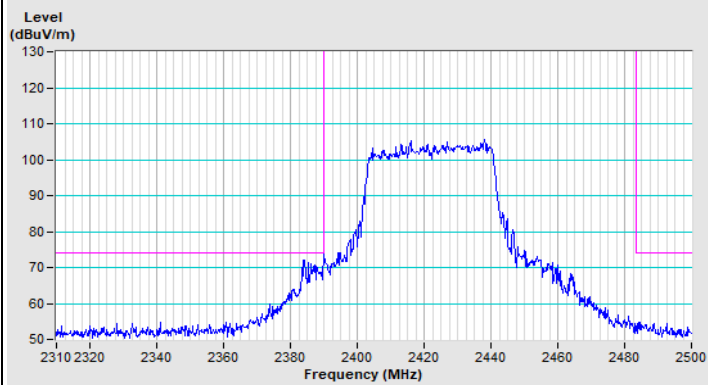


802.11ax (HE40) Channel 9

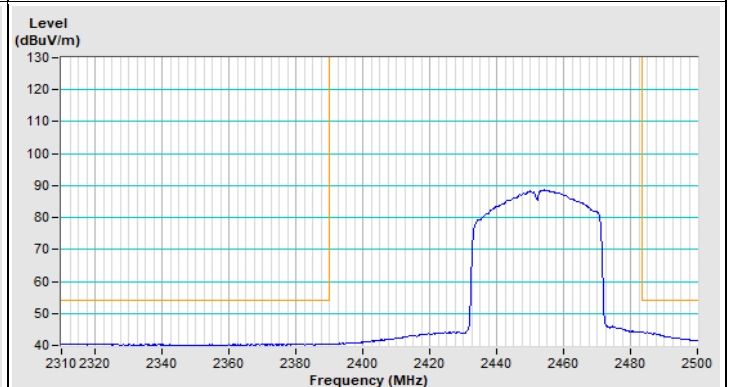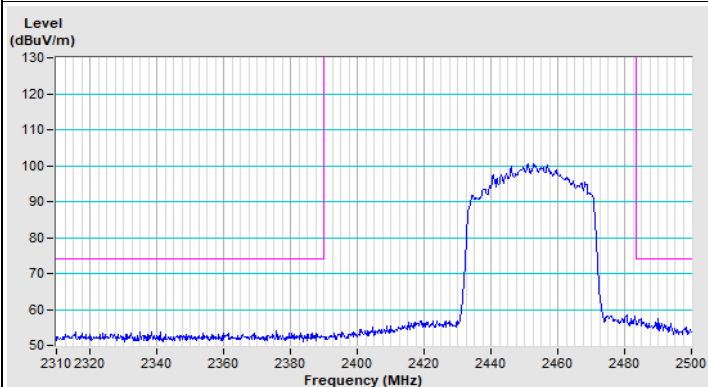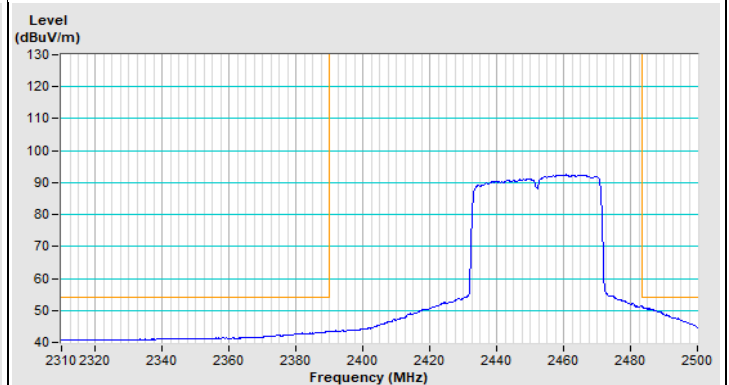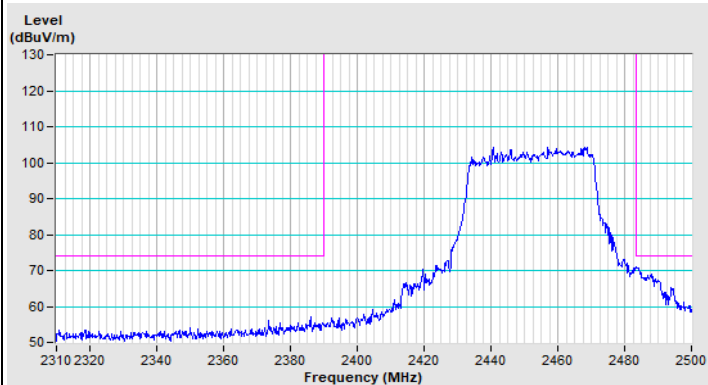


802.11ax (HE40) Channel 10

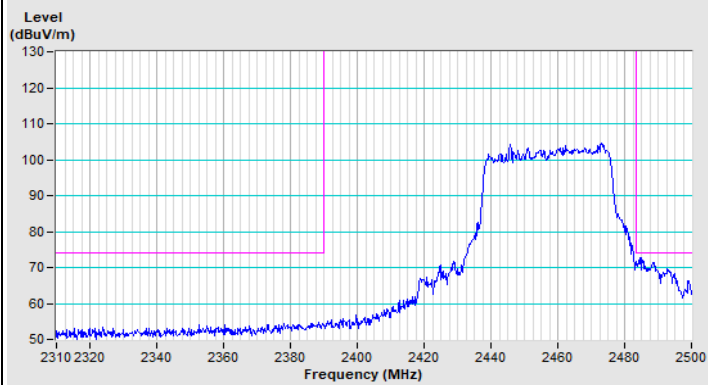


Horizontal (Peak)

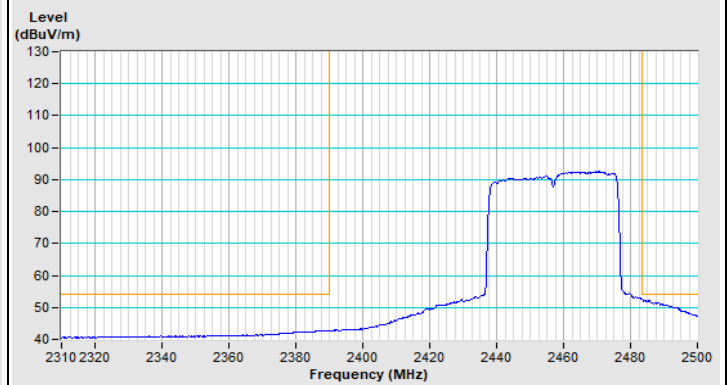

Horizontal (Average)

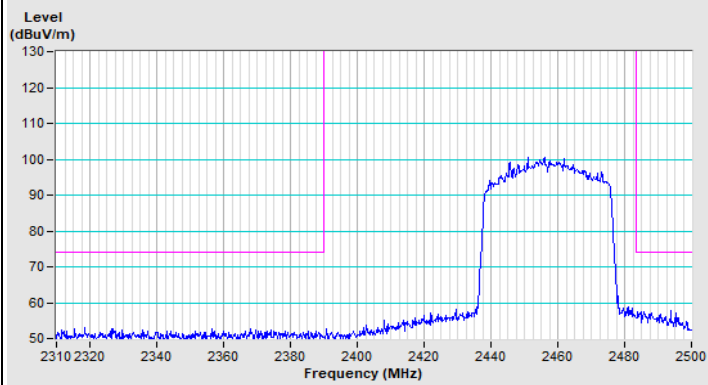


Vertical (Peak)

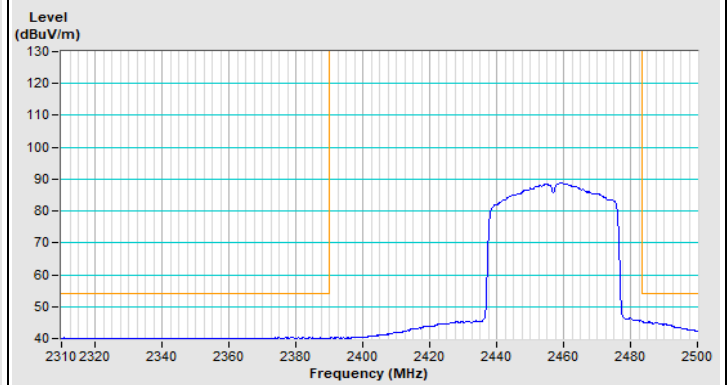


Vertical (Average)


802.11ax (HE40) Channel 11

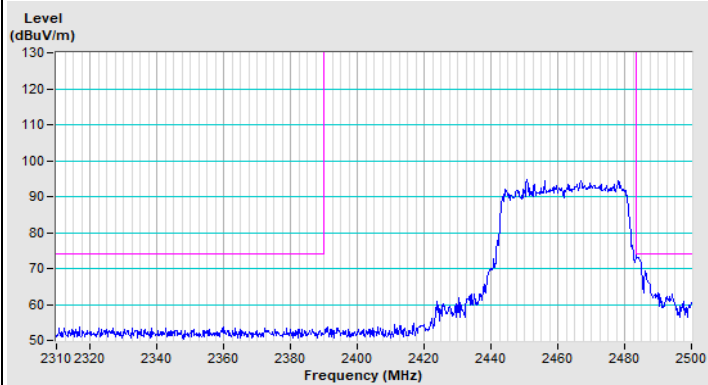


Horizontal (Peak)

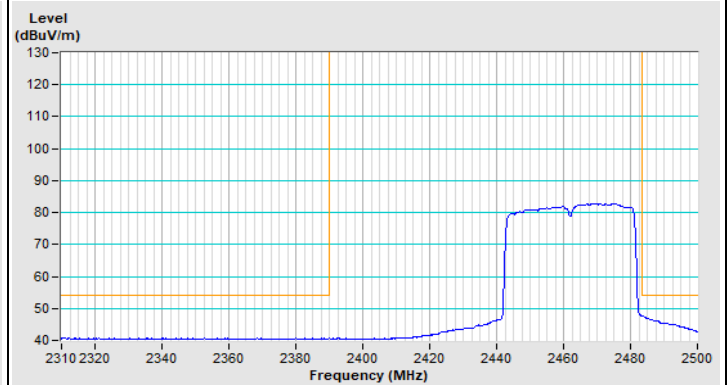

Horizontal (Average)

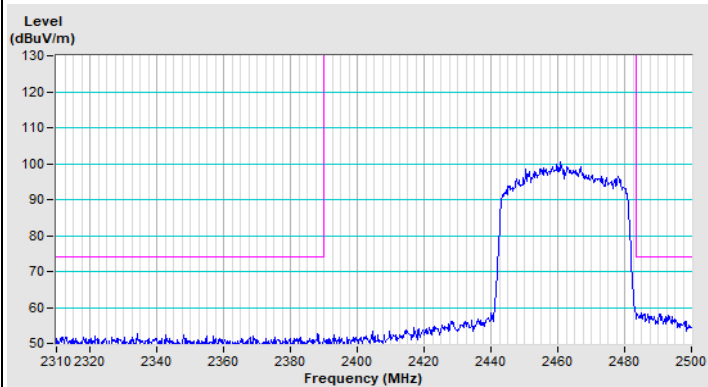


Vertical (Peak)

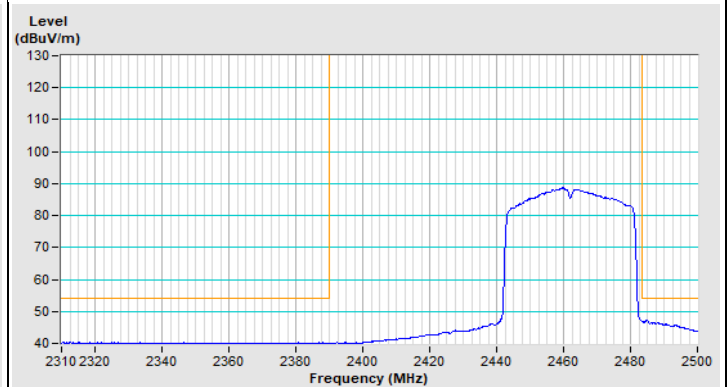


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 1

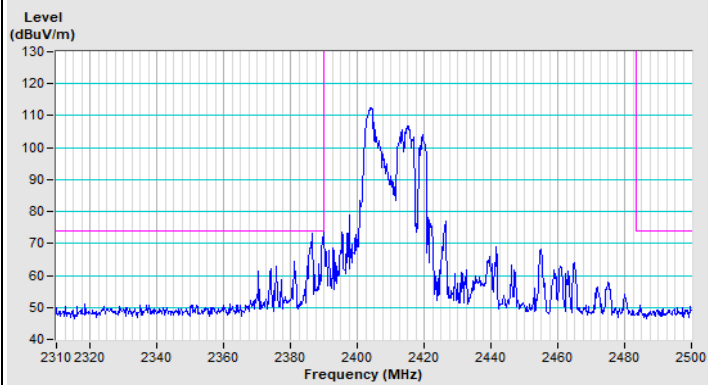


Horizontal (Peak)

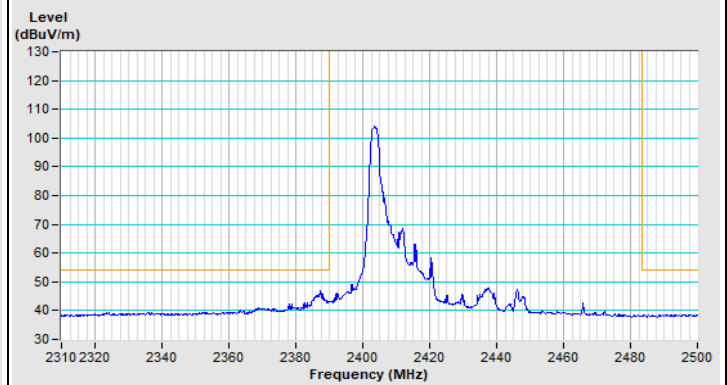

Horizontal (Average)

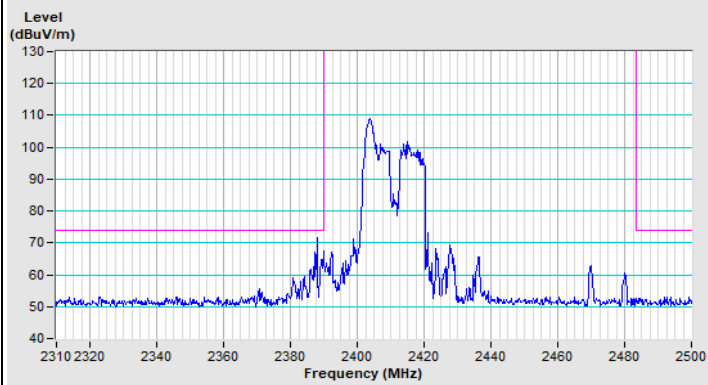


Vertical (Peak)

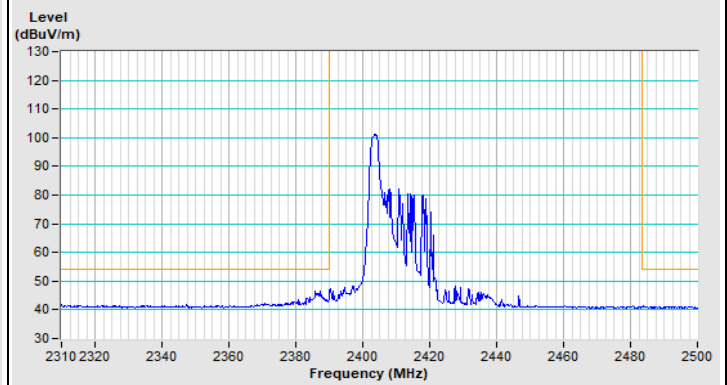


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 11

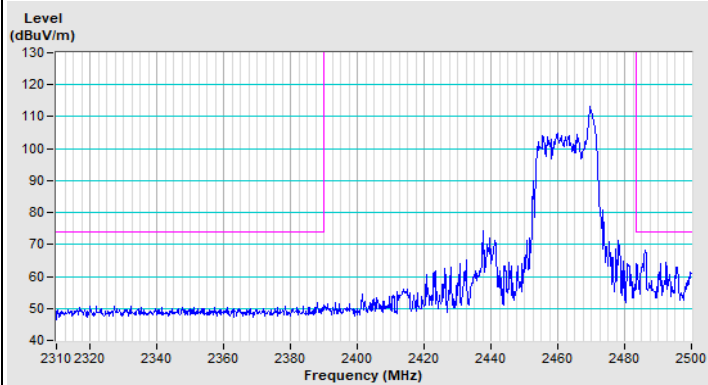


Horizontal (Peak)

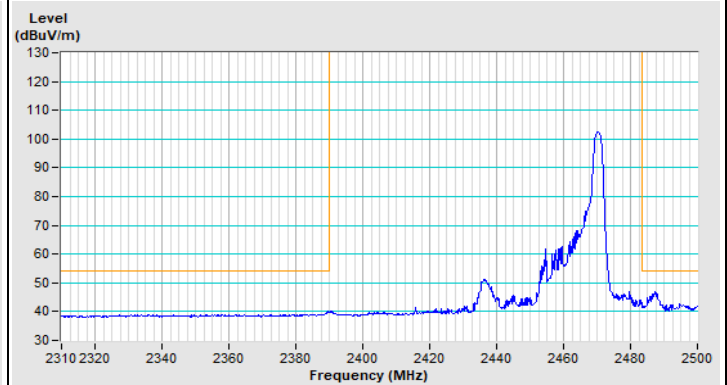

Horizontal (Average)

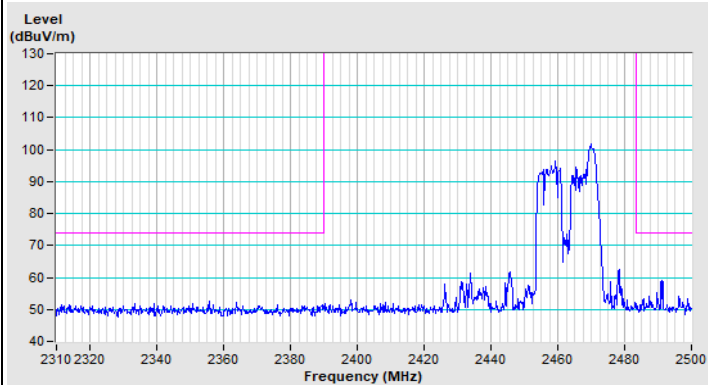


Vertical (Peak)

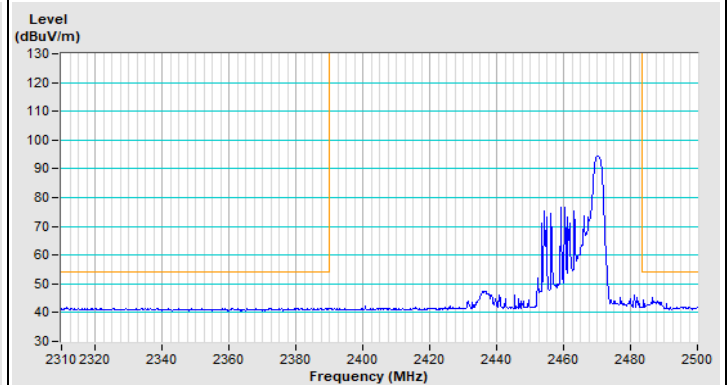


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 12

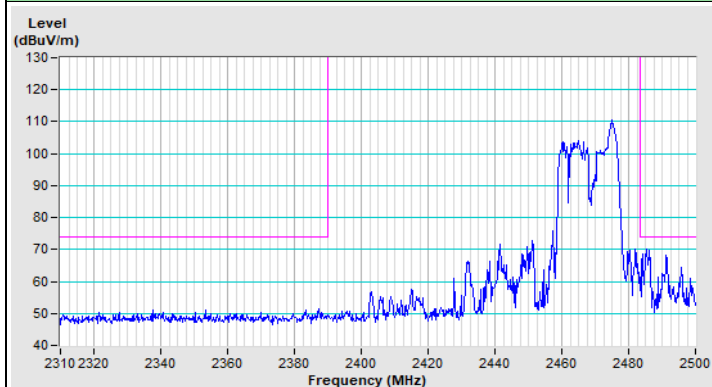


Horizontal (Peak)

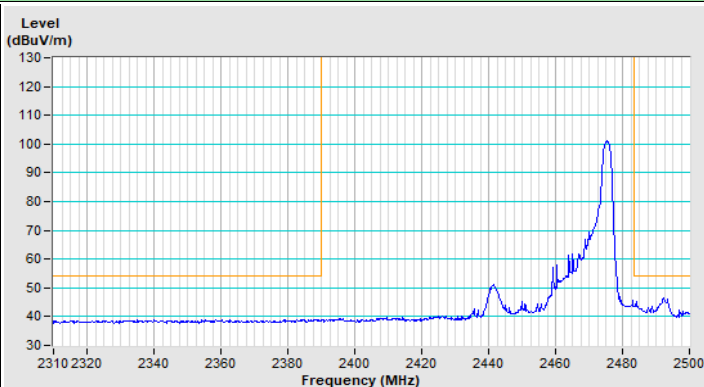

Horizontal (Average)

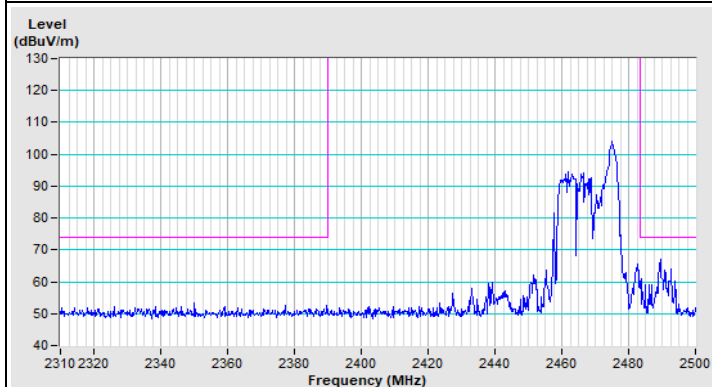


Vertical (Peak)

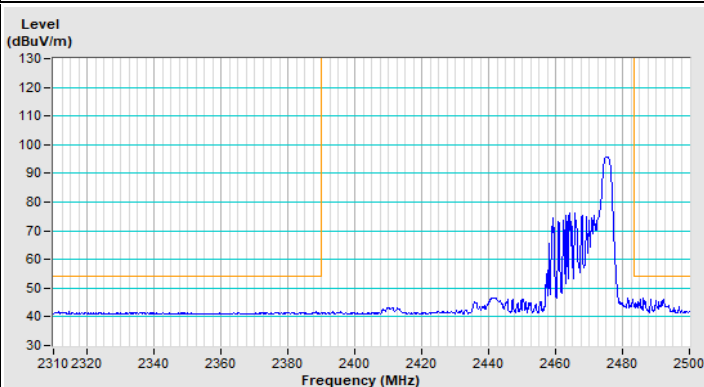


Vertical (Average)


802.11ax (HE20) 26-tone RU Channel 13

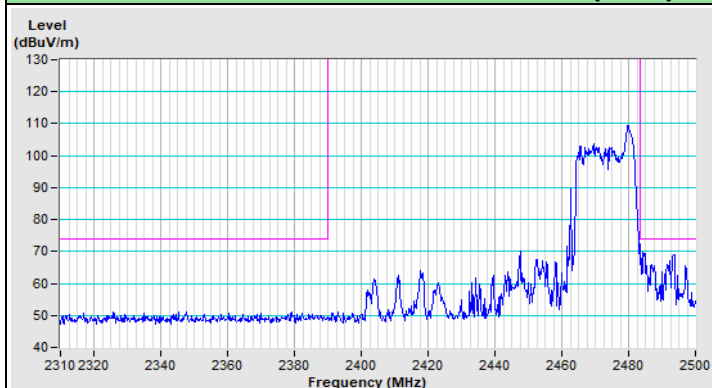


Horizontal (Peak)

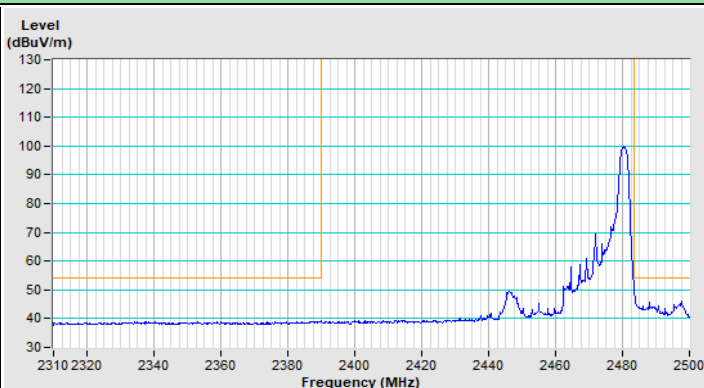

Horizontal (Average)

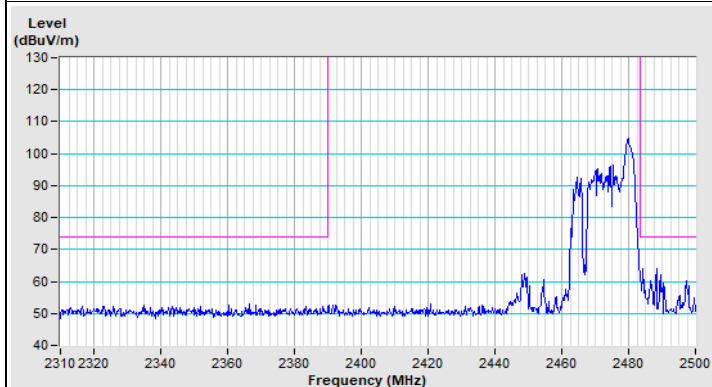


Vertical (Peak)

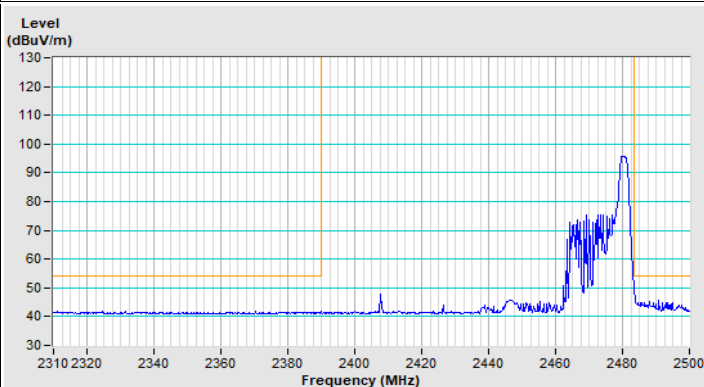


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 1

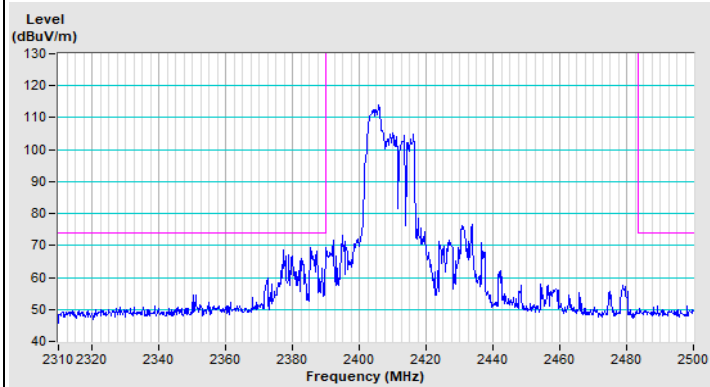


Horizontal (Peak)

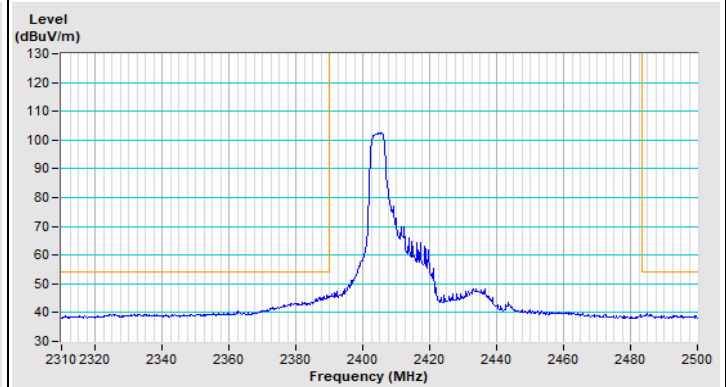

Horizontal (Average)

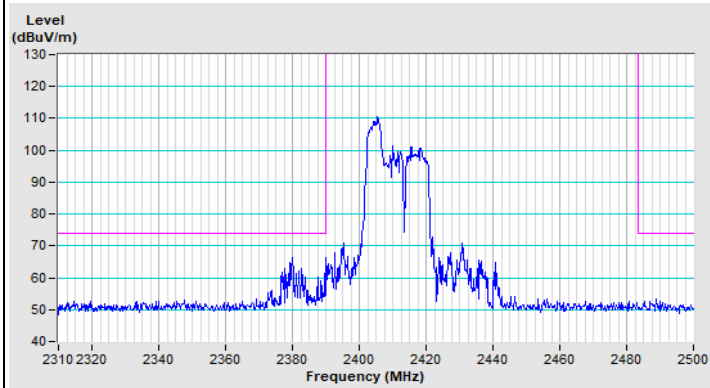


Vertical (Peak)

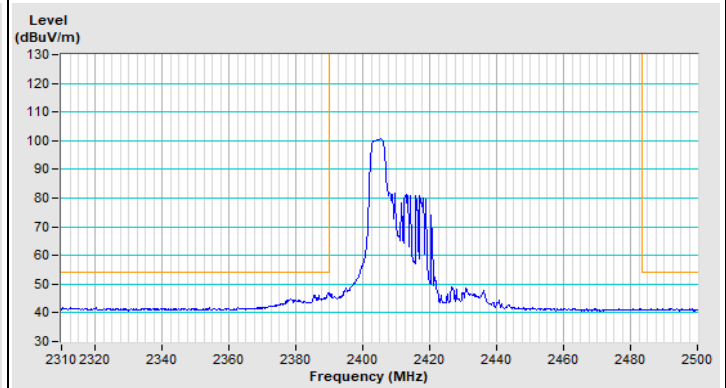


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 11

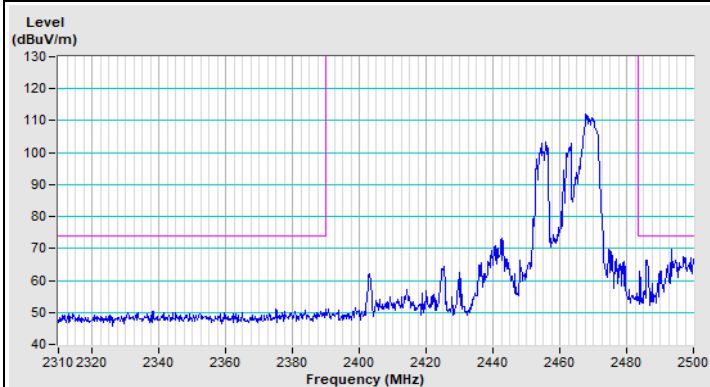


Horizontal (Peak)

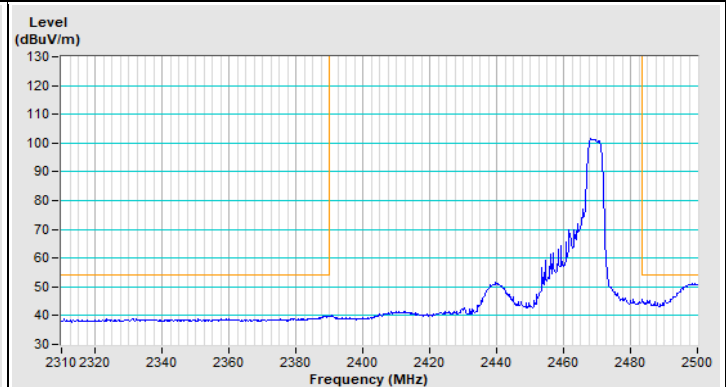

Horizontal (Average)




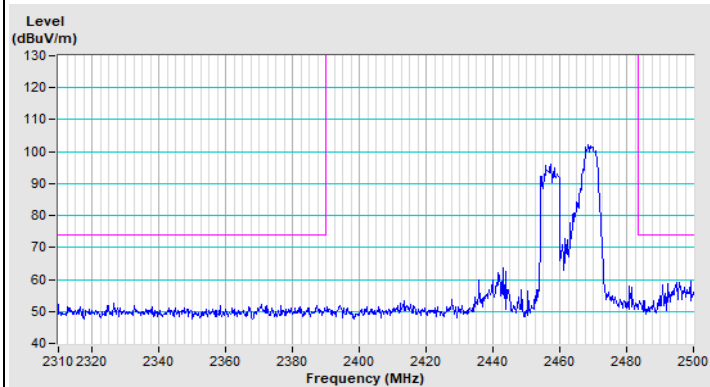


Vertical (Peak)




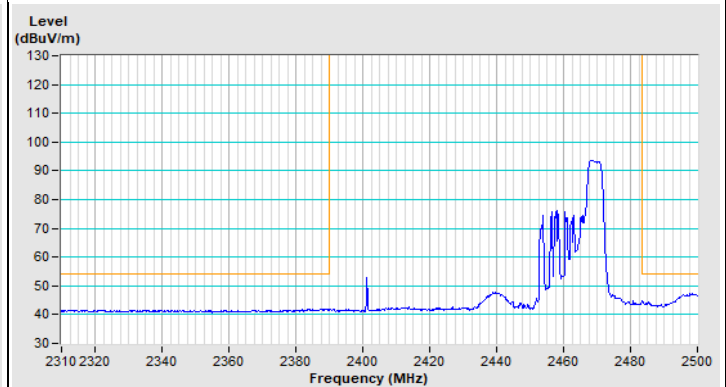


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 12

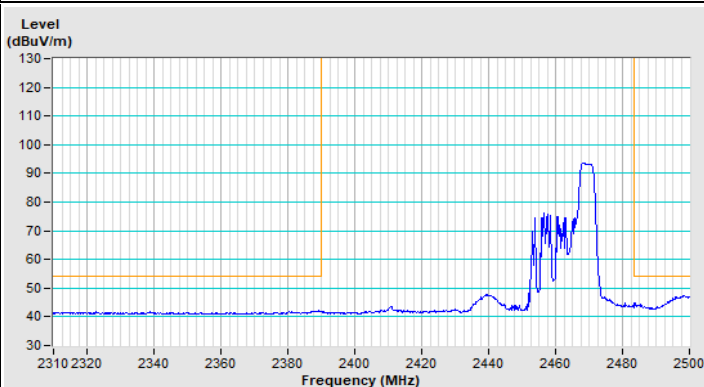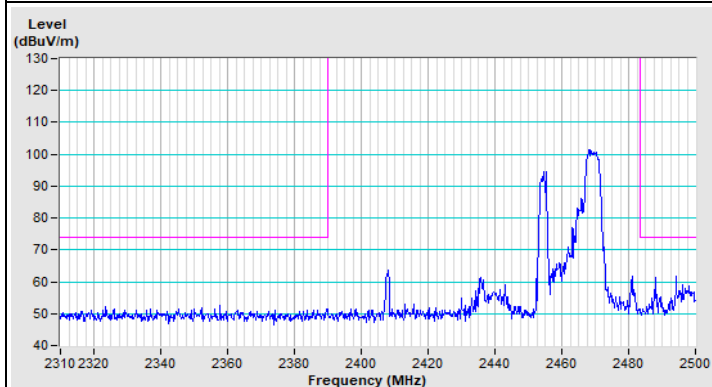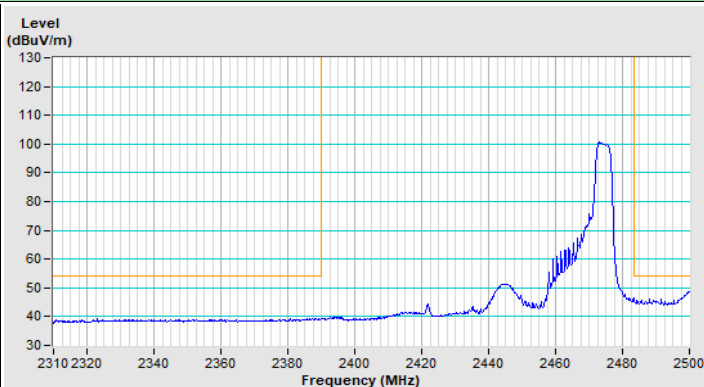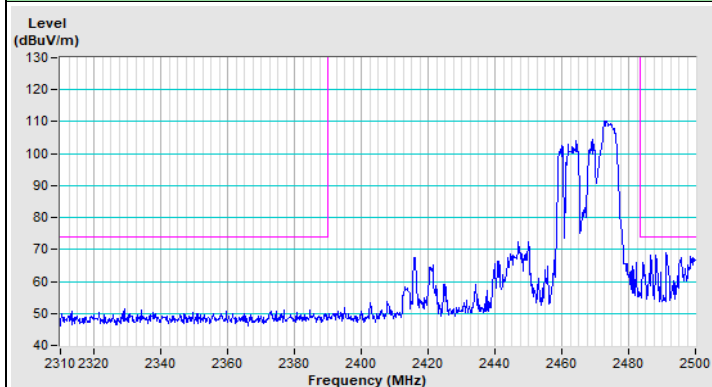


802.11ax (HE20) 52-tone RU Channel 13

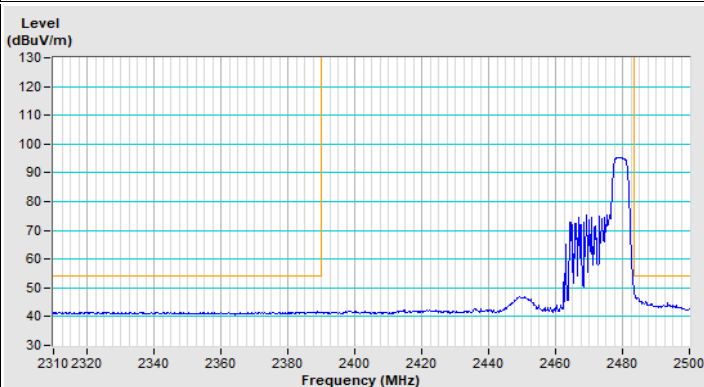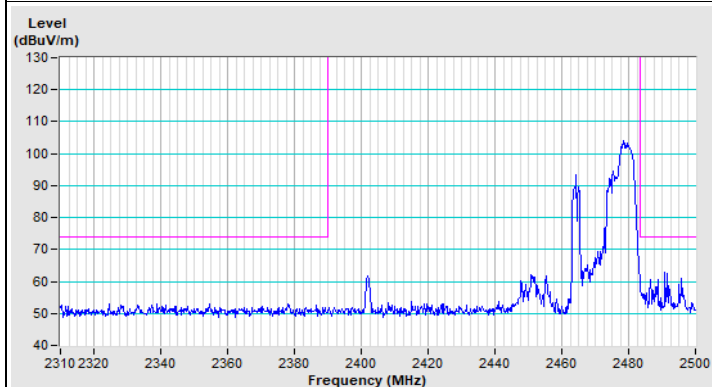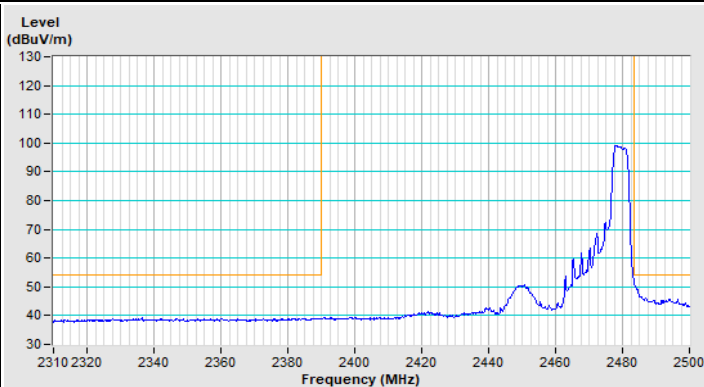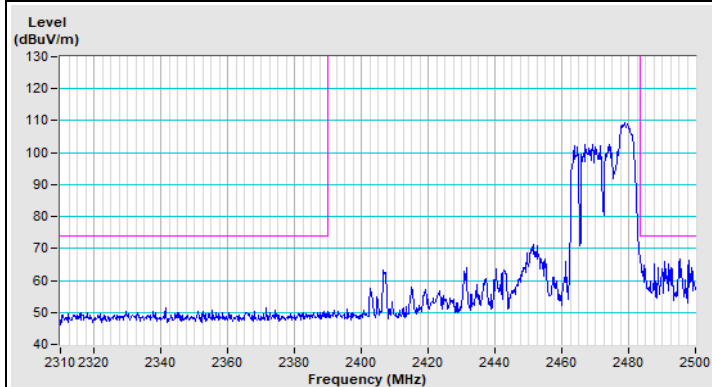


802.11ax (HE20) 106-tone RU Channel 1

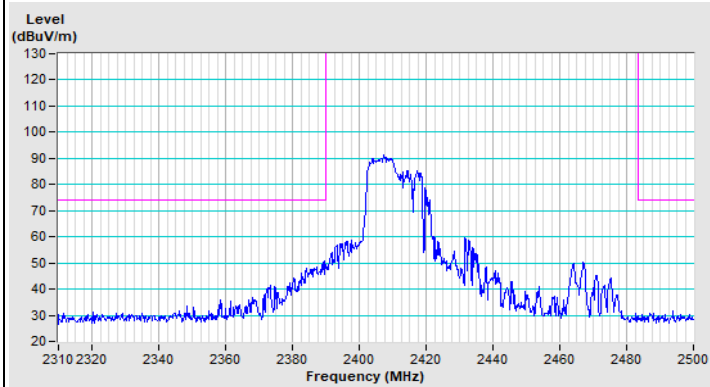


Horizontal (Peak)

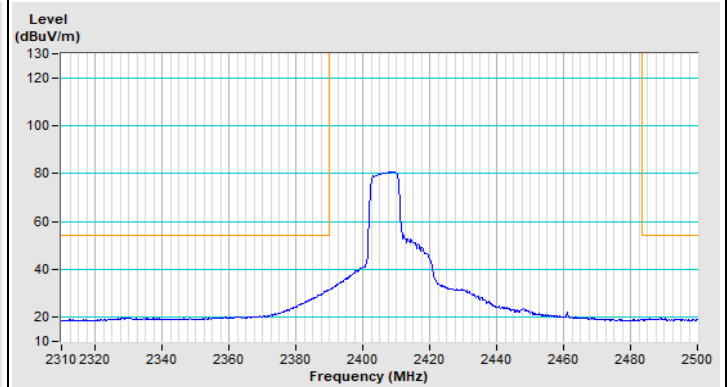

Horizontal (Average)

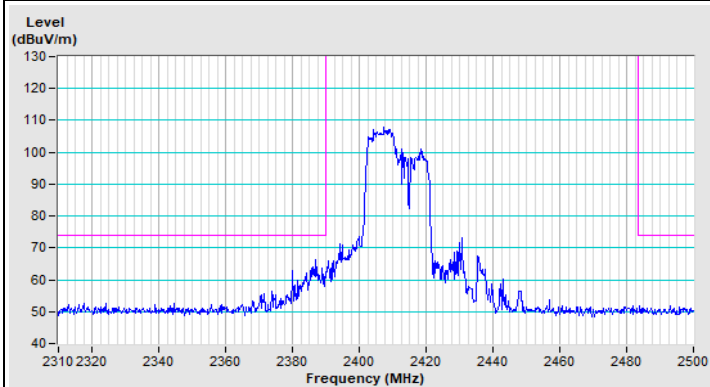


Vertical (Peak)

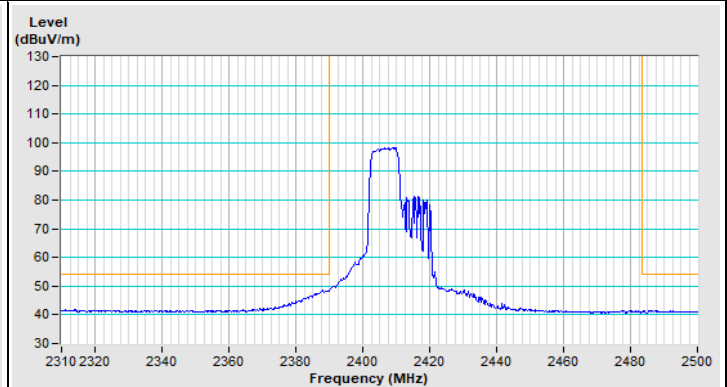


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 11

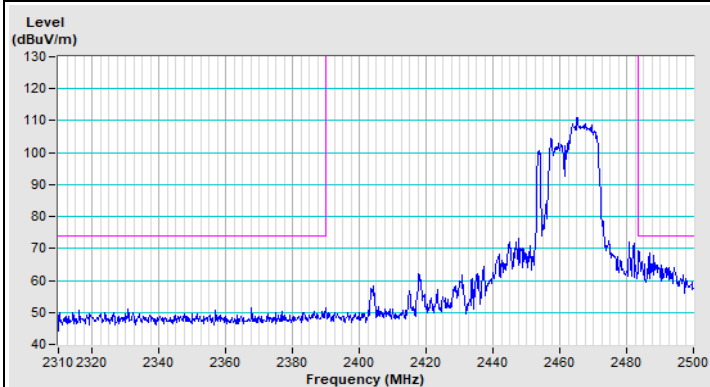


Horizontal (Peak)

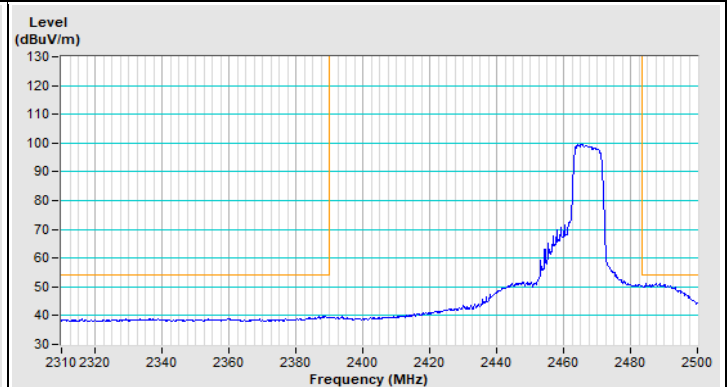

Horizontal (Average)

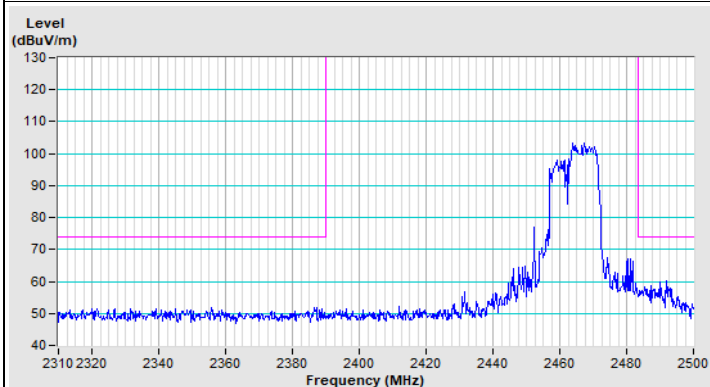


Vertical (Peak)

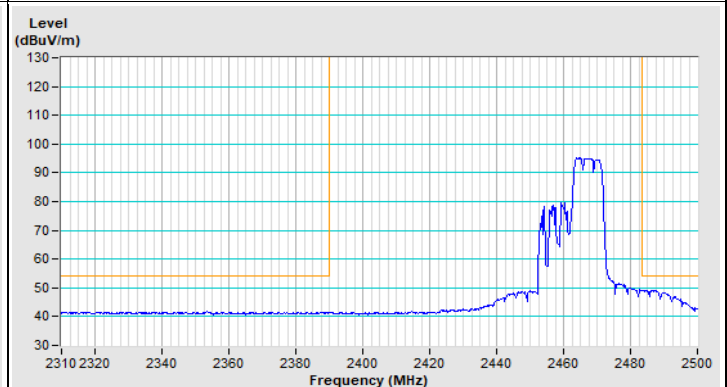


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 12

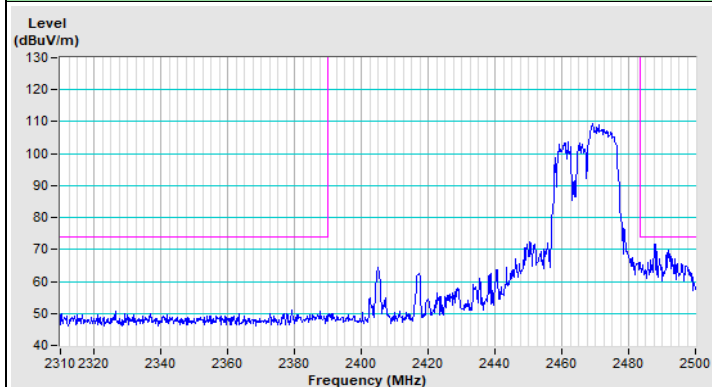


Horizontal (Peak)

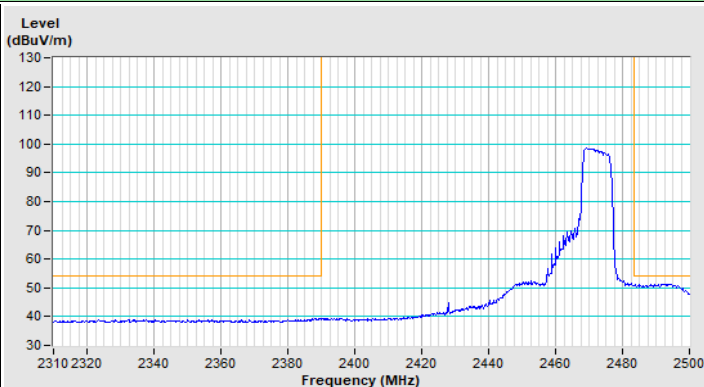

Horizontal (Average)

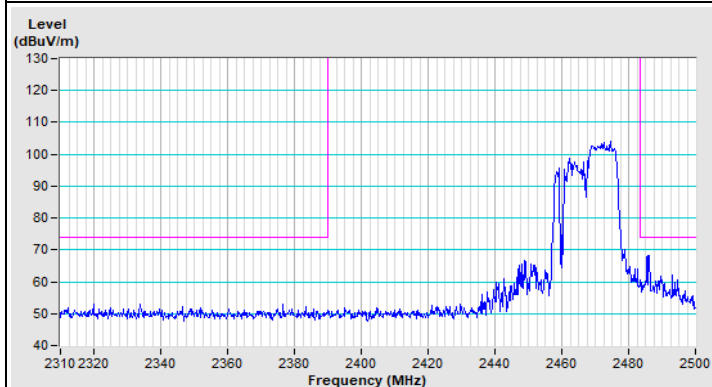


Vertical (Peak)

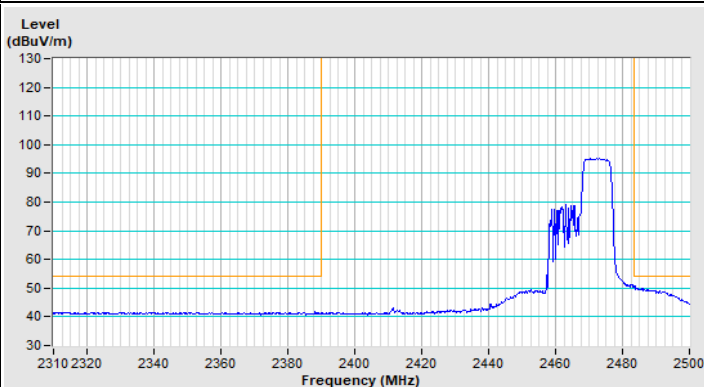


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 13

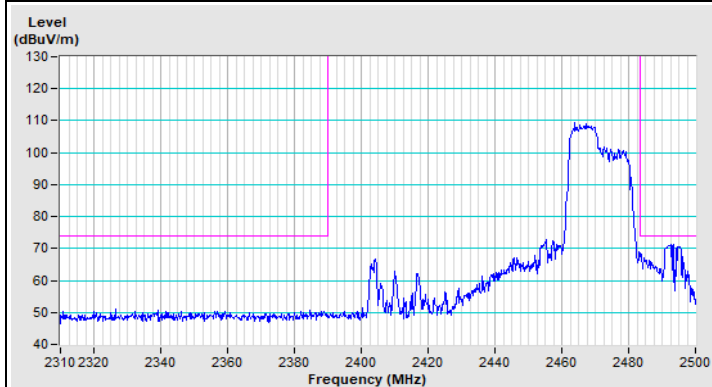


Horizontal (Peak)

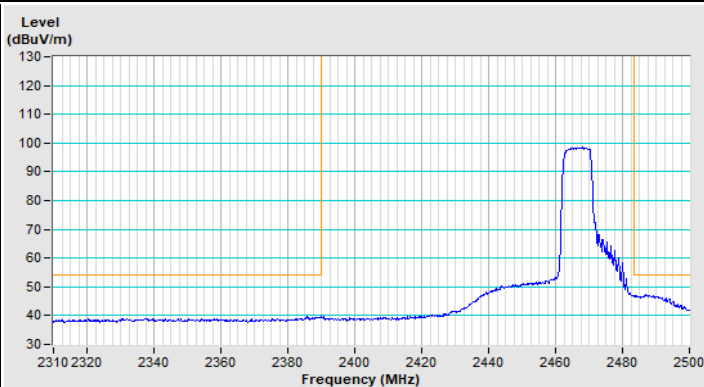

Horizontal (Average)

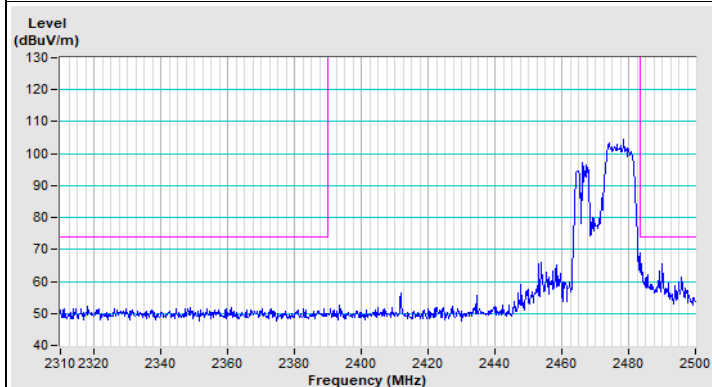

Vertical (Peak)

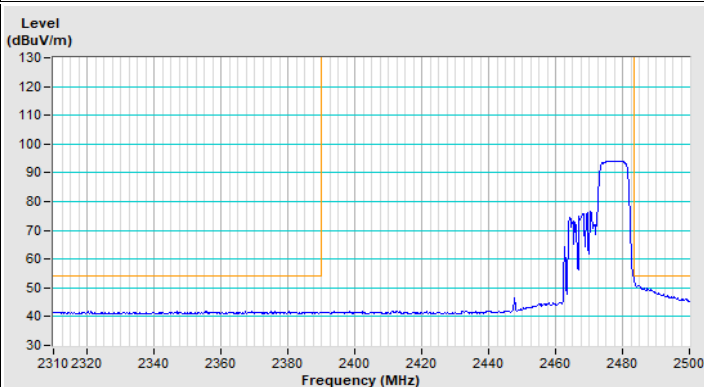

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---