


Project Information

Mode:	802.11ac80	Band:	U-NII-2C
Bandwidth	80MHz	Channel	138
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 16.5		

Test Graph

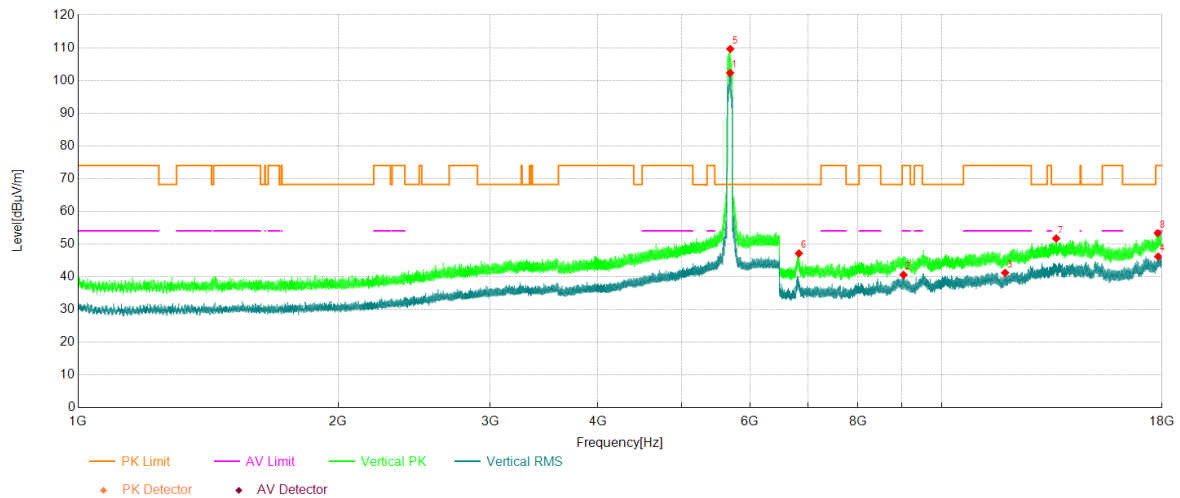


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5689.46	89.16	13.12	102.28	-	-	Vertical	NA
2	9032.77	37.77	2.83	40.60	54.00	13.40	Vertical	PASS
3	11843.46	35.16	6.04	41.20	54.00	12.80	Vertical	PASS
4	17813.69	33.18	13.00	46.18	54.00	7.82	Vertical	PASS
5	5690.92	96.49	13.12	109.61	-	-	Vertical	NA
6	6834.66	48.11	-0.97	47.14	68.20	21.06	Vertical	PASS
7	13575.04	42.86	8.85	51.71	68.20	16.49	Vertical	PASS
8	17798.74	40.45	12.85	53.30	74.00	20.70	Vertical	PASS

Project Information

Mode:	802.11ax160	Band:	U-NII-2C
Bandwidth	160MHz	Channel	114
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 14		

Test Graph

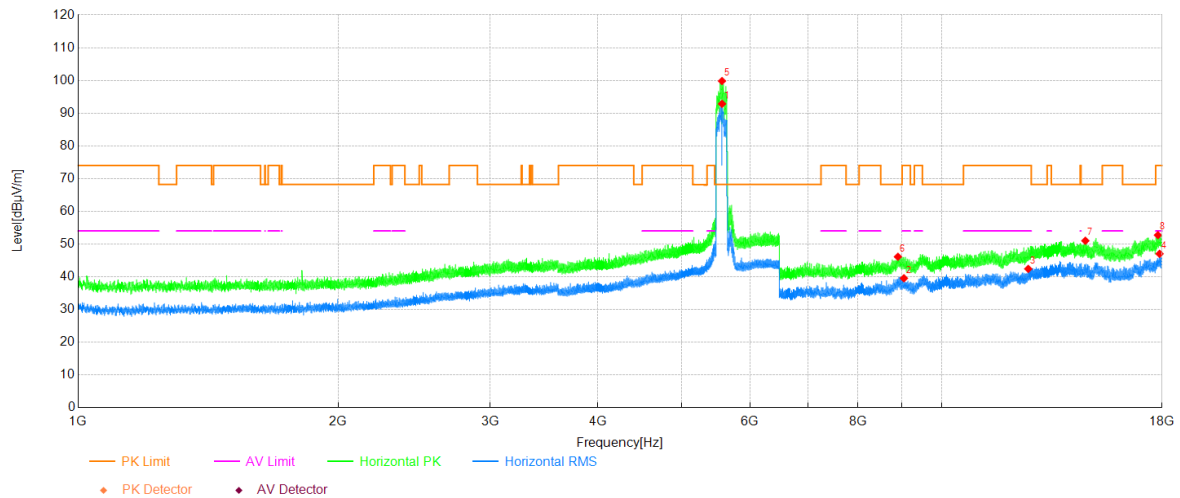


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5567.54	80.31	12.52	92.83	-	-	Horizontal	NA
2	9042.73	36.73	2.82	39.55	54.00	14.45	Horizontal	PASS
3	12599.04	35.93	6.49	42.42	54.00	11.58	Horizontal	PASS
4	17881.55	33.33	13.69	47.02	54.00	6.98	Horizontal	PASS
5	5567.35	87.30	12.51	99.81	-	-	Horizontal	NA
6	8899.75	43.31	2.80	46.11	68.20	22.09	Horizontal	PASS
7	14672.94	40.01	11.00	51.01	68.20	17.19	Horizontal	PASS
8	17804.88	39.81	12.91	52.72	74.00	21.28	Horizontal	PASS

Project Information

Mode:	802.11ax160	Band:	U-NII-2C
Bandwidth	160MHz	Channel	114
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 14		


Test Graph

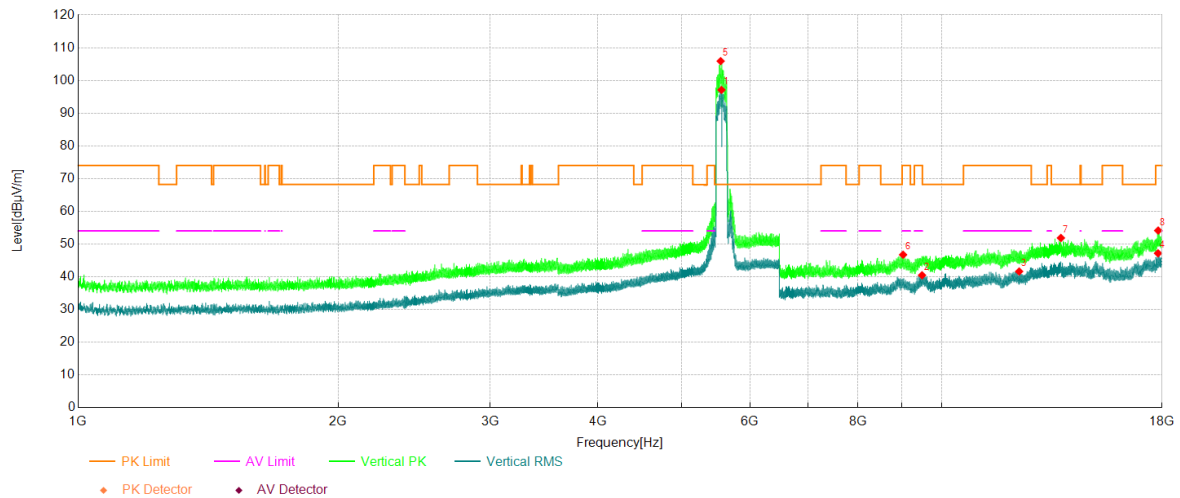

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5559.65	84.64	12.46	97.10	-	-	Vertical	NA
2	9492.02	37.38	3.08	40.46	54.00	13.54	Vertical	PASS
3	12296.58	35.49	6.13	41.62	54.00	12.38	Vertical	PASS
4	17808.71	34.22	12.95	47.17	54.00	6.83	Vertical	PASS
5	5547.55	93.49	12.40	105.89	-	-	Vertical	NA
6	9023.95	43.90	2.83	46.73	74.00	27.27	Vertical	PASS
7	13744.47	42.41	9.45	51.86	68.20	16.34	Vertical	PASS
8	17815.99	41.11	13.02	54.13	74.00	19.87	Vertical	PASS

Project Information			
Mode:	802.11ac20	Band:	U-NII-3
Bandwidth	20MHz	Channel	165
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

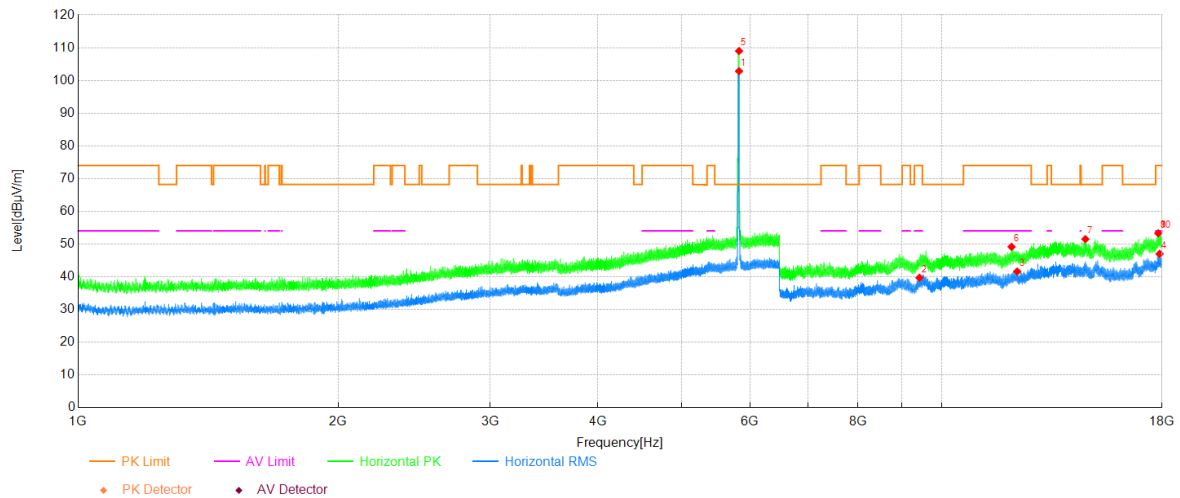
Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5826.41	90.03	12.81	102.84	-	-	Horizontal	NA
2	9426.46	37.05	2.66	39.71	54.00	14.29	Horizontal	PASS
3	12231.79	35.34	6.27	41.61	54.00	12.39	Horizontal	PASS
4	17883.85	33.29	13.72	47.01	54.00	6.99	Horizontal	PASS
5	5826.41	96.17	12.81	108.98	-	-	Horizontal	NA
6	12050.47	43.35	5.80	49.15	74.00	24.85	Horizontal	PASS
7	14671.79	40.53	10.98	51.51	68.20	16.69	Horizontal	PASS
8	17821.36	40.22	13.08	53.30	74.00	20.70	Horizontal	PASS
9	17821.36	40.22	13.08	53.30	74.00	20.70	Horizontal	PASS
10	17821.36	40.22	13.08	53.30	74.00	20.70	Horizontal	PASS

Project Information

Mode:	802.11ac20	Band:	U-NII-3
Bandwidth	20MHz	Channel	165
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

Test Graph

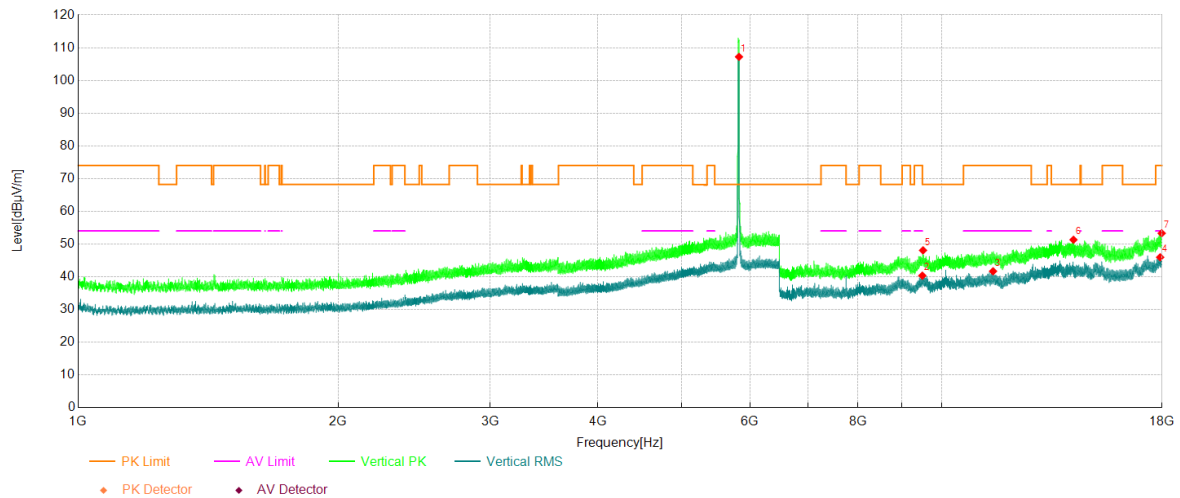


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5825.49	94.40	12.81	107.21	-	-	Vertical	NA
2	9500.07	37.20	3.14	40.34	-	-	Vertical	NA
3	11469.70	36.13	5.55	41.68	54.00	12.32	Vertical	PASS
4	17909.91	32.15	13.81	45.96	54.00	8.04	Vertical	PASS
5	9516.17	44.86	3.22	48.08	68.20	20.12	Vertical	PASS
6	14214.07	41.45	9.87	51.32	68.20	16.88	Vertical	PASS
7	17983.52	39.98	13.31	53.29	74.00	20.71	Vertical	PASS

Project Information

Mode:	802.11ac40	Band:	U-NII-3
Bandwidth	40MHz	Channel	151
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

Test Graph

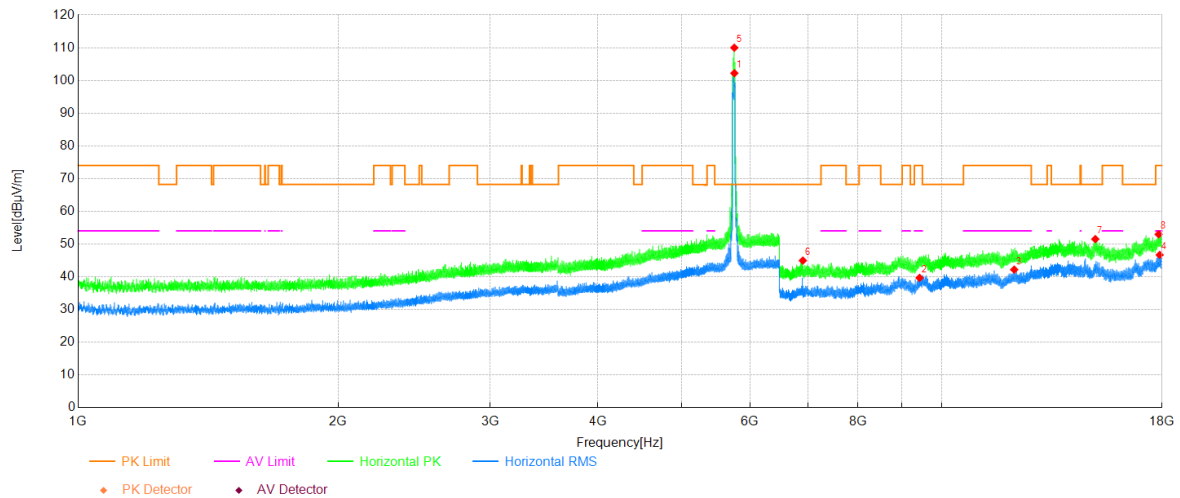


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5754.36	89.47	12.73	102.20	-	-	Horizontal	NA
2	9428.76	37.00	2.67	39.67	54.00	14.33	Horizontal	PASS
3	12135.57	36.07	6.12	42.19	54.00	11.81	Horizontal	PASS
4	17888.45	32.92	13.77	46.69	54.00	7.31	Horizontal	PASS
5	5753.63	97.27	12.72	109.99	-	-	Horizontal	NA
6	6906.73	45.81	-0.86	44.95	68.20	23.25	Horizontal	PASS
7	15066.25	41.43	10.08	51.51	68.20	16.69	Horizontal	PASS
8	17837.84	39.72	13.25	52.97	74.00	21.03	Horizontal	PASS

Project Information

Mode:	802.11ac40	Band:	U-NII-3
Bandwidth	40MHz	Channel	151
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

Test Graph

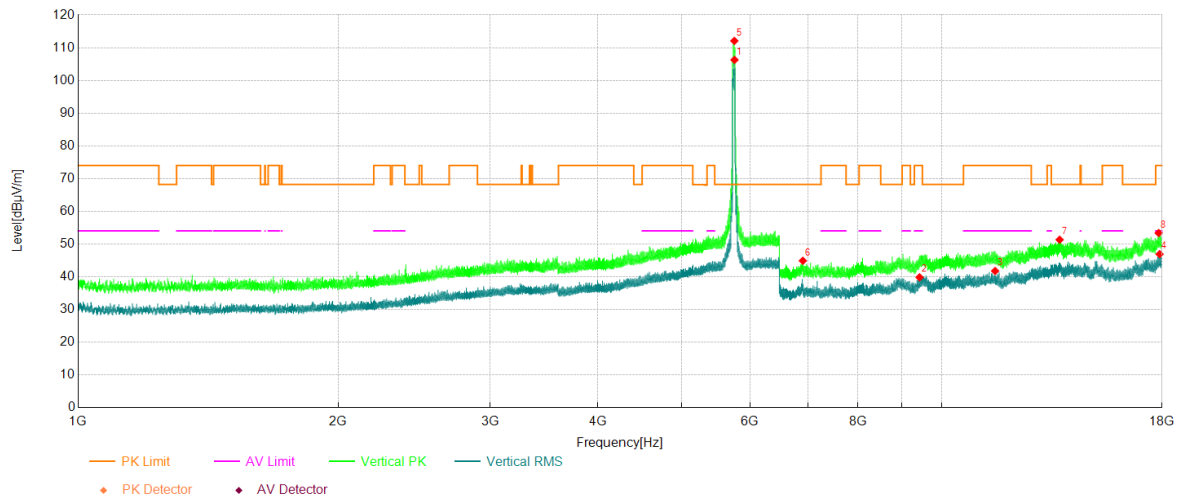


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5756.38	93.55	12.73	106.28	-	-	Vertical	NA
2	9428.00	37.16	2.67	39.83	54.00	14.17	Vertical	PASS
3	11534.10	36.04	5.73	41.77	54.00	12.23	Vertical	PASS
4	17884.23	33.20	13.72	46.92	54.00	7.08	Vertical	PASS
5	5753.81	99.35	12.73	112.08	-	-	Vertical	NA
6	6906.35	45.75	-0.86	44.89	68.20	23.31	Vertical	PASS
7	13697.71	41.26	10.07	51.33	68.20	16.87	Vertical	PASS
8	17839.76	40.09	13.27	53.36	74.00	20.64	Vertical	PASS

Project Information

Mode:	802.11ac80	Band:	U-NII-3
Bandwidth	80MHz	Channel	155
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

Test Graph

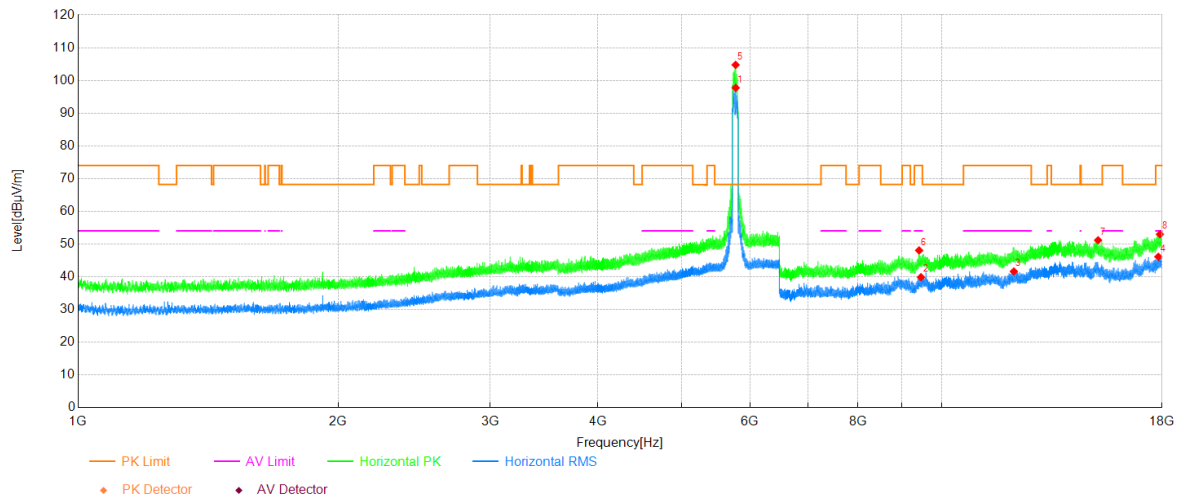


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5774.34	84.98	12.75	97.73	-	-	Horizontal	NA
2	9464.42	37.00	2.86	39.86	54.00	14.14	Horizontal	PASS
3	12124.07	35.54	6.08	41.62	54.00	12.38	Horizontal	PASS
4	17824.43	33.00	13.11	46.11	54.00	7.89	Horizontal	PASS
5	5773.24	92.00	12.74	104.74	-	-	Horizontal	NA
6	9417.65	45.43	2.63	48.06	74.00	25.94	Horizontal	PASS
7	15177.42	41.26	9.91	51.17	68.20	17.03	Horizontal	PASS
8	17898.41	39.12	13.87	52.99	74.00	21.01	Horizontal	PASS

Project Information

Mode:	802.11ac80	Band:	U-NII-3
Bandwidth	80MHz	Channel	155
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

Test Graph

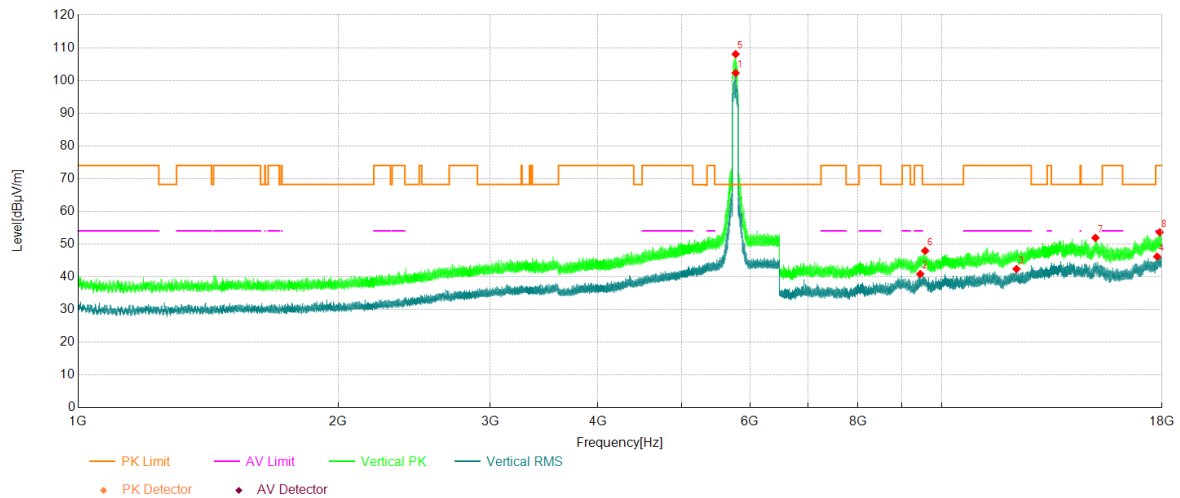


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5773.61	89.53	12.74	102.27	-	-	Vertical	NA
2	9446.01	38.12	2.73	40.85	54.00	13.15	Vertical	PASS
3	12209.56	36.08	6.31	42.39	54.00	11.61	Vertical	PASS
4	17766.54	33.65	12.51	46.16	54.00	7.84	Vertical	PASS
5	5773.61	95.28	12.74	108.02	-	-	Vertical	NA
6	9569.84	44.47	3.46	47.93	68.20	20.27	Vertical	PASS
7	15073.15	41.67	10.22	51.89	68.20	16.31	Vertical	PASS
8	17888.06	39.83	13.76	53.59	74.00	20.41	Vertical	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-3
Bandwidth	20MHz	Channel	165
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

Test Graph

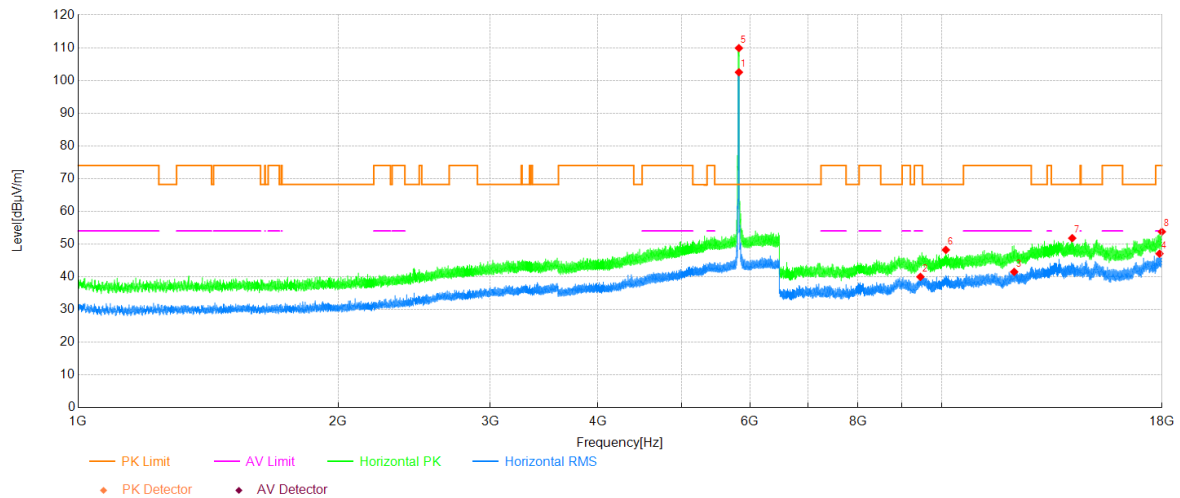


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5824.39	89.67	12.82	102.49	-	-	Horizontal	NA
2	9449.85	37.23	2.75	39.98	54.00	14.02	Horizontal	PASS
3	12134.80	35.38	6.12	41.50	54.00	12.50	Horizontal	PASS
4	17880.01	33.38	13.68	47.06	54.00	6.94	Horizontal	PASS
5	5824.39	97.06	12.82	109.88	-	-	Horizontal	NA
6	10113.80	44.30	3.91	48.21	68.20	19.99	Horizontal	PASS
7	14164.62	42.08	9.72	51.80	68.20	16.40	Horizontal	PASS
8	17990.80	40.50	13.26	53.76	74.00	20.24	Horizontal	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-3
Bandwidth	20MHz	Channel	165
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

Test Graph

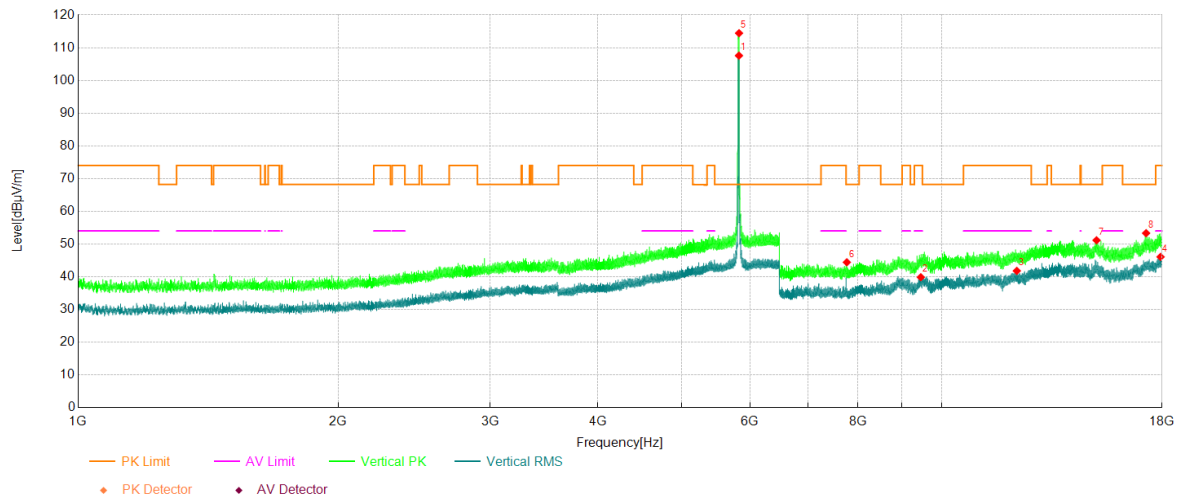


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5824.58	94.75	12.82	107.57	-	-	Vertical	NA
2	9460.58	37.03	2.83	39.86	54.00	14.14	Vertical	PASS
3	12219.52	35.52	6.29	41.81	54.00	12.19	Vertical	PASS
4	17930.61	32.40	13.67	46.07	54.00	7.93	Vertical	PASS
5	5826.23	101.62	12.81	114.43	-	-	Vertical	NA
6	7766.58	44.04	0.39	44.43	68.20	23.77	Vertical	PASS
7	15115.32	40.56	10.59	51.15	68.20	17.05	Vertical	PASS
8	17252.86	41.89	11.43	53.32	68.20	14.88	Vertical	PASS

Project Information

Mode:	802.11ax40	Band:	U-NII-3
Bandwidth	40MHz	Channel	151
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

Test Graph

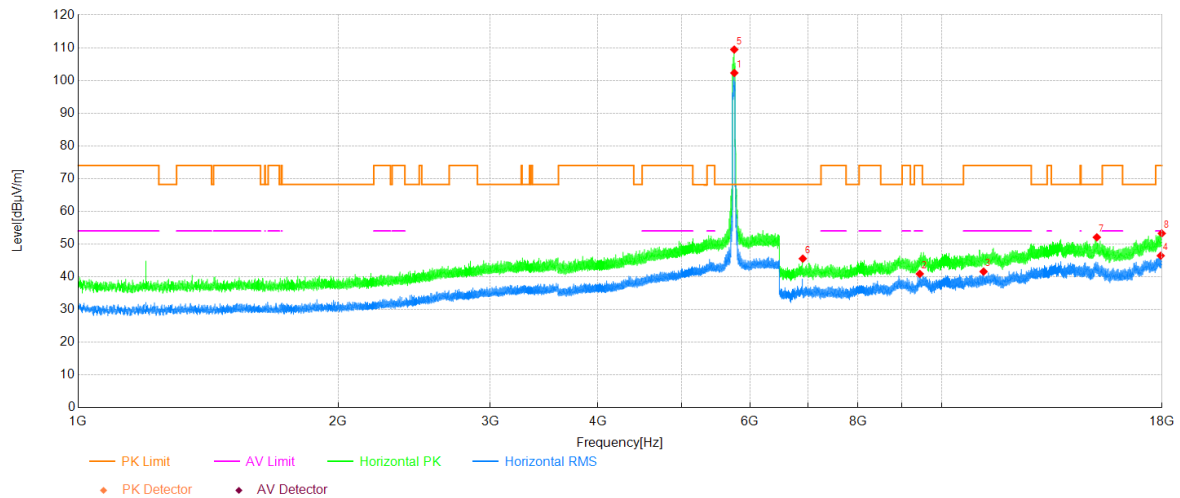


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5753.81	89.55	12.73	102.28	-	-	Horizontal	NA
2	9434.13	38.20	2.69	40.89	54.00	13.11	Horizontal	PASS
3	11184.11	35.72	5.86	41.58	54.00	12.42	Horizontal	PASS
4	17937.90	32.82	13.62	46.44	54.00	7.56	Horizontal	PASS
5	5752.16	96.71	12.72	109.43	-	-	Horizontal	NA
6	6905.96	46.40	-0.85	45.55	68.20	22.65	Horizontal	PASS
7	15126.44	41.59	10.47	52.06	68.20	16.14	Horizontal	PASS
8	17987.73	39.97	13.28	53.25	74.00	20.75	Horizontal	PASS

Project Information

Mode:	802.11ax40	Band:	U-NII-3
Bandwidth	40MHz	Channel	151
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 19		

Test Graph

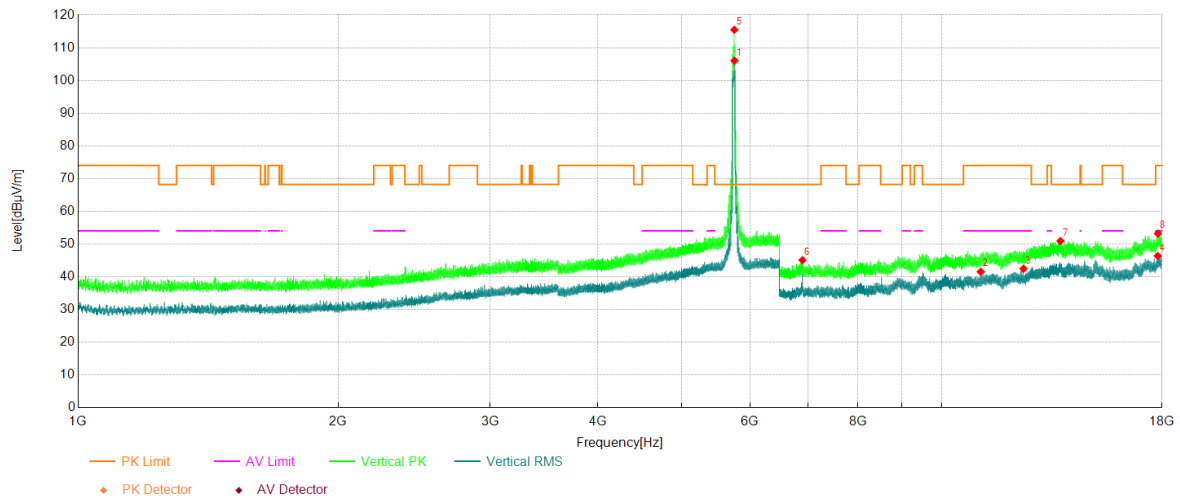


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5756.01	93.30	12.72	106.02	-	-	Vertical	NA
2	11099.39	35.97	5.57	41.54	54.00	12.46	Vertical	PASS
3	12441.10	36.12	6.35	42.47	54.00	11.53	Vertical	PASS
4	17798.36	33.52	12.85	46.37	54.00	7.63	Vertical	PASS
5	5753.99	102.74	12.73	115.47	-	-	Vertical	NA
6	6899.83	45.94	-0.85	45.09	68.20	23.11	Vertical	PASS
7	13727.61	41.22	9.70	50.92	68.20	17.28	Vertical	PASS
8	17807.56	40.26	12.94	53.20	74.00	20.80	Vertical	PASS

Project Information

Mode:	802.11ax80	Band:	U-NII-3
Bandwidth	80MHz	Channel	155
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 18		

Test Graph

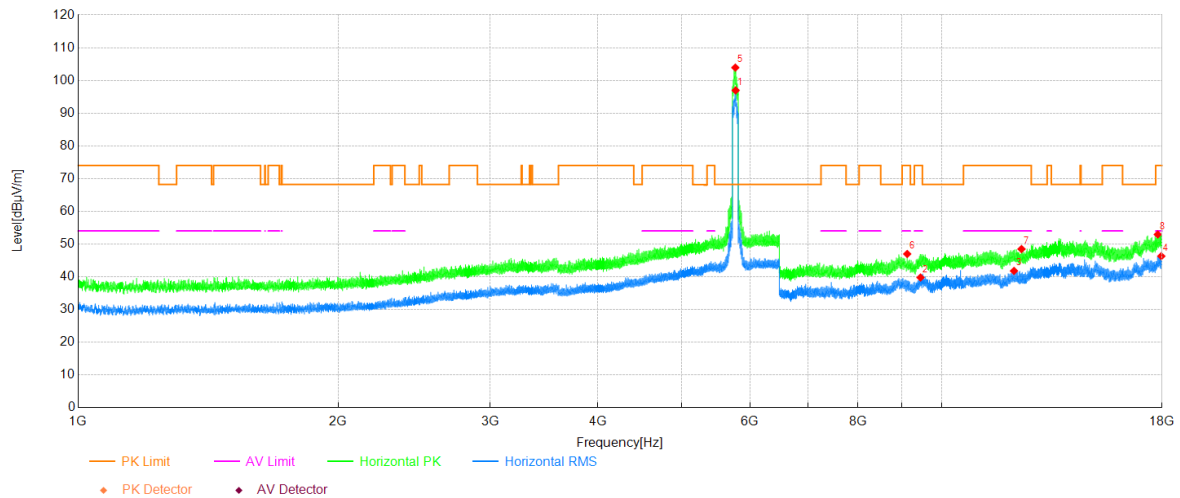


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5773.98	84.20	12.75	96.95	-	-	Horizontal	NA
2	9452.53	37.00	2.77	39.77	54.00	14.23	Horizontal	PASS
3	12128.67	35.69	6.10	41.79	54.00	12.21	Horizontal	PASS
4	17965.12	32.86	13.44	46.30	54.00	7.70	Horizontal	PASS
5	5768.84	91.17	12.74	103.91	-	-	Horizontal	NA
6	9123.24	43.93	3.04	46.97	74.00	27.03	Horizontal	PASS
7	12374.78	42.10	6.37	48.47	74.00	25.53	Horizontal	PASS
8	17796.83	40.10	12.83	52.93	74.00	21.07	Horizontal	PASS

Project Information

Mode:	802.11ax80	Band:	U-NII-3
Bandwidth	80MHz	Channel	155
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	x;Power setting 18		

Test Graph

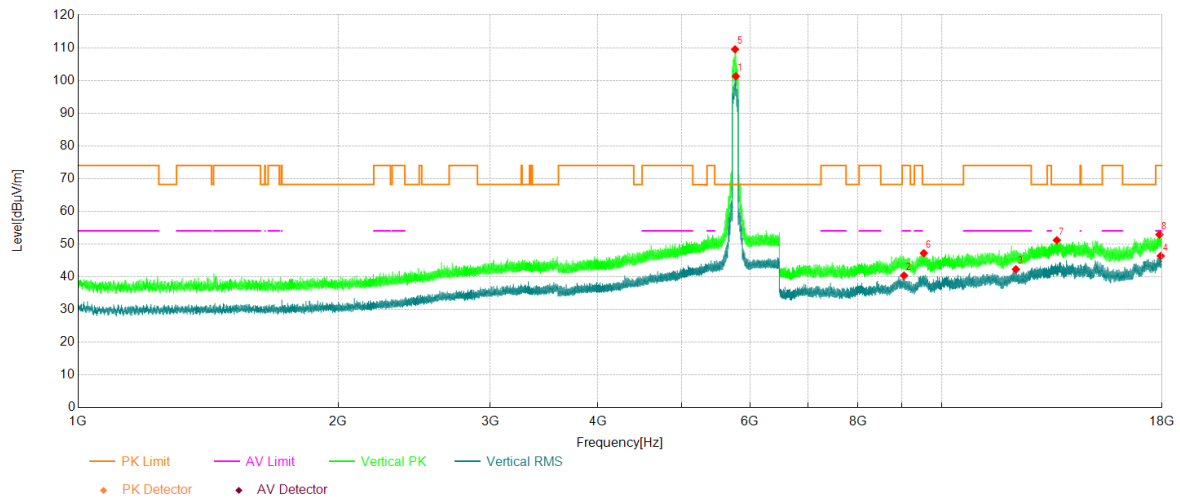


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5776.18	88.52	12.74	101.26	-	-	Vertical	NA
2	9044.65	37.55	2.82	40.37	54.00	13.63	Vertical	PASS
3	12191.16	35.99	6.30	42.29	54.00	11.71	Vertical	PASS
4	17937.51	32.74	13.62	46.36	54.00	7.64	Vertical	PASS
5	5764.81	96.76	12.74	109.50	-	-	Vertical	NA
6	9537.25	43.88	3.33	47.21	68.20	20.99	Vertical	PASS
7	13597.27	42.16	9.00	51.16	68.20	17.04	Vertical	PASS
8	17876.18	39.27	13.63	52.90	74.00	21.10	Vertical	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;26Tone_RU8;power setting 8.5		

Test Graph

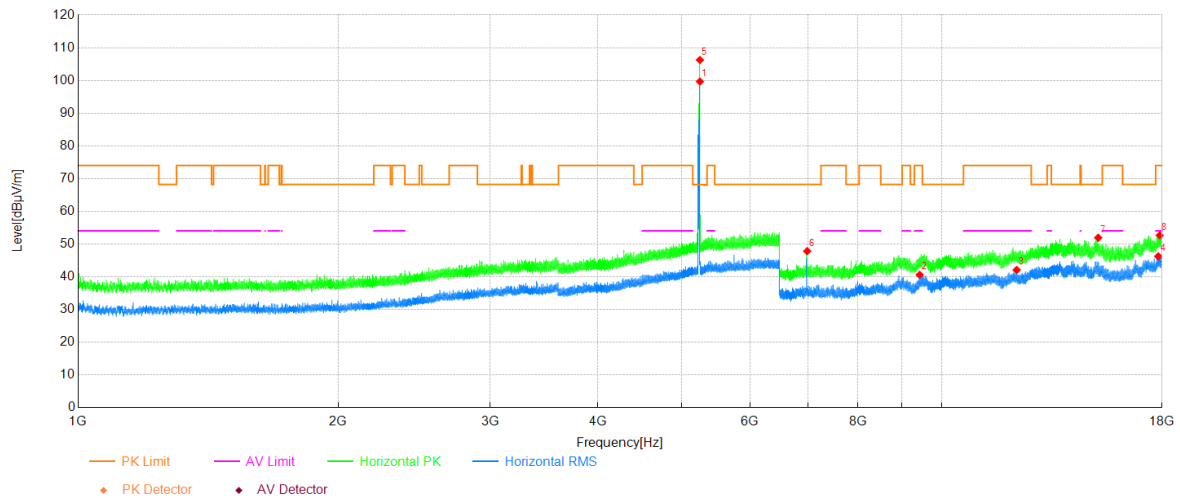


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5249.07	88.19	11.48	99.67	-	-	Horizontal	NA
2	9431.83	37.91	2.68	40.59	54.00	13.41	Horizontal	PASS
3	12214.92	35.78	6.31	42.09	54.00	11.91	Horizontal	PASS
4	17819.06	33.19	13.06	46.25	54.00	7.75	Horizontal	PASS
5	5248.89	94.76	11.48	106.24	-	-	Horizontal	NA
6	6986.47	48.74	-0.90	47.84	68.20	20.36	Horizontal	PASS
7	15181.26	42.05	9.87	51.92	68.20	16.28	Horizontal	PASS
8	17889.21	38.88	13.77	52.65	74.00	21.35	Horizontal	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;26Tone_RU8;power setting 8.5		

Test Graph

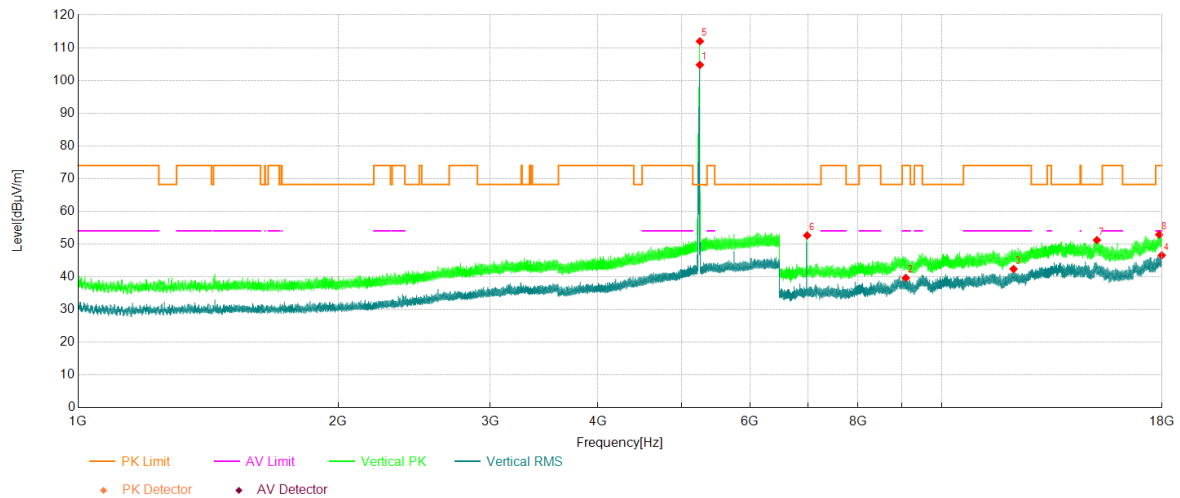


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5248.16	93.27	11.48	104.75	-	-	Vertical	NA
2	9088.74	36.79	2.87	39.66	54.00	14.34	Vertical	PASS
3	12114.49	36.32	6.05	42.37	54.00	11.63	Vertical	PASS
4	17987.73	33.27	13.28	46.55	54.00	7.45	Vertical	PASS
5	5248.52	100.48	11.48	111.96	-	-	Vertical	NA
6	6986.47	53.52	-0.90	52.62	68.20	15.58	Vertical	PASS
7	15131.42	40.78	10.42	51.20	68.20	17.00	Vertical	PASS
8	17864.30	39.38	13.52	52.90	74.00	21.10	Vertical	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;52Tone_RU40;power setting 11.5		

Test Graph

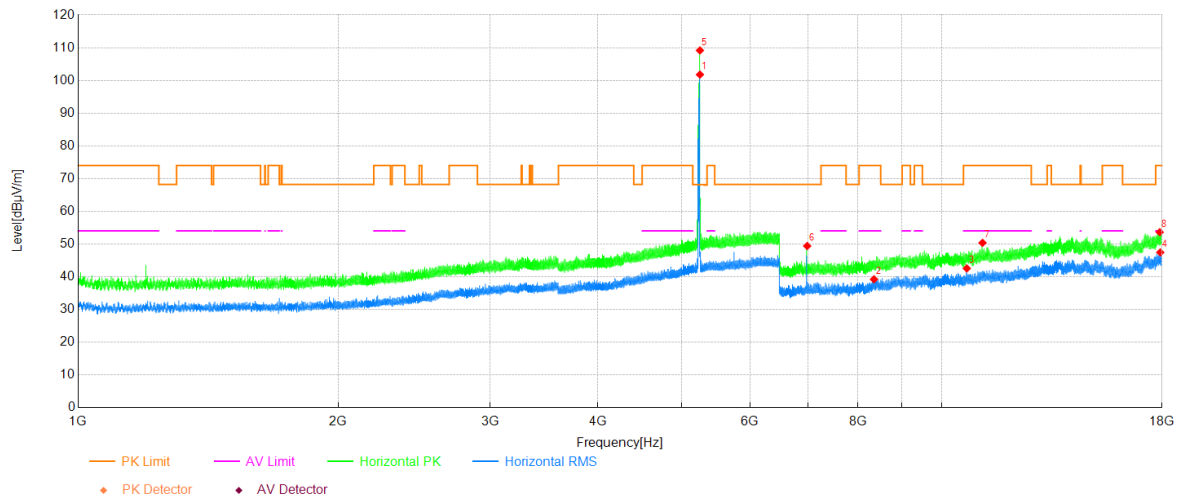


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5249.44	90.31	11.47	101.78	-	-	Horizontal	NA
2	8349.64	38.12	1.11	39.23	54.00	14.77	Horizontal	PASS
3	10694.57	37.86	4.70	42.56	54.00	11.44	Horizontal	PASS
4	17915.28	33.68	13.77	47.45	54.00	6.55	Horizontal	PASS
5	5248.89	97.68	11.48	109.16	-	-	Horizontal	NA
6	6986.47	50.31	-0.90	49.41	68.20	18.79	Horizontal	PASS
7	11151.91	44.64	5.74	50.38	74.00	23.62	Horizontal	PASS
8	17889.60	39.85	13.77	53.62	74.00	20.38	Horizontal	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;52Tone_RU40;power setting 11.5		


Test Graph

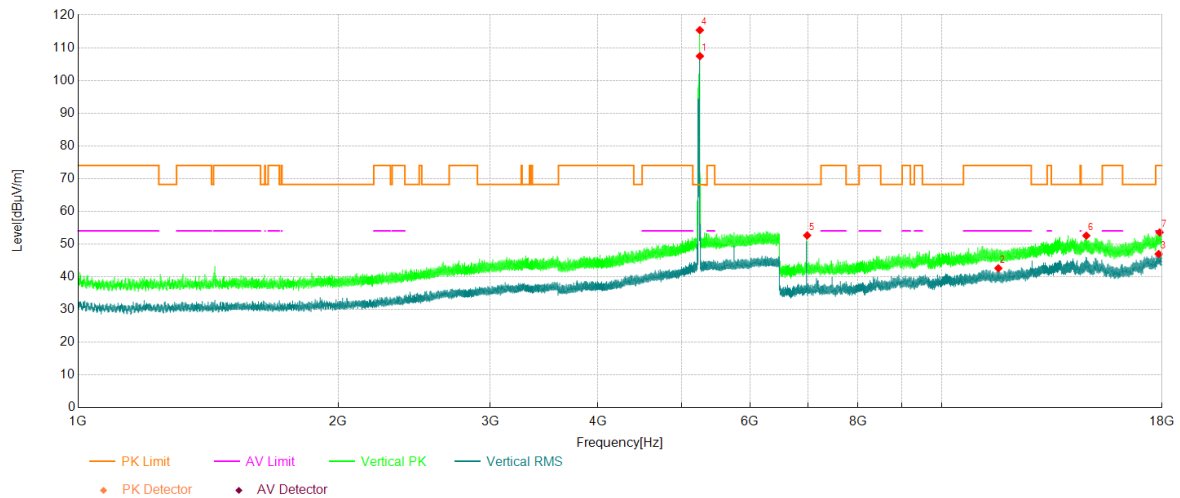

Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5248.89	95.93	11.48	107.41	-	-	Vertical	NA
2	11633.77	36.58	6.03	42.61	54.00	11.39	Vertical	PASS
3	17838.61	33.70	13.26	46.96	54.00	7.04	Vertical	PASS
4	5247.42	103.88	11.48	115.36	-	-	Vertical	NA
5	6986.85	53.55	-0.90	52.65	68.20	15.55	Vertical	PASS
6	14709.36	41.10	11.46	52.56	68.20	15.64	Vertical	PASS
7	17885.38	39.80	13.73	53.53	74.00	20.47	Vertical	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;106Tone_RU53;power setting 14.5		

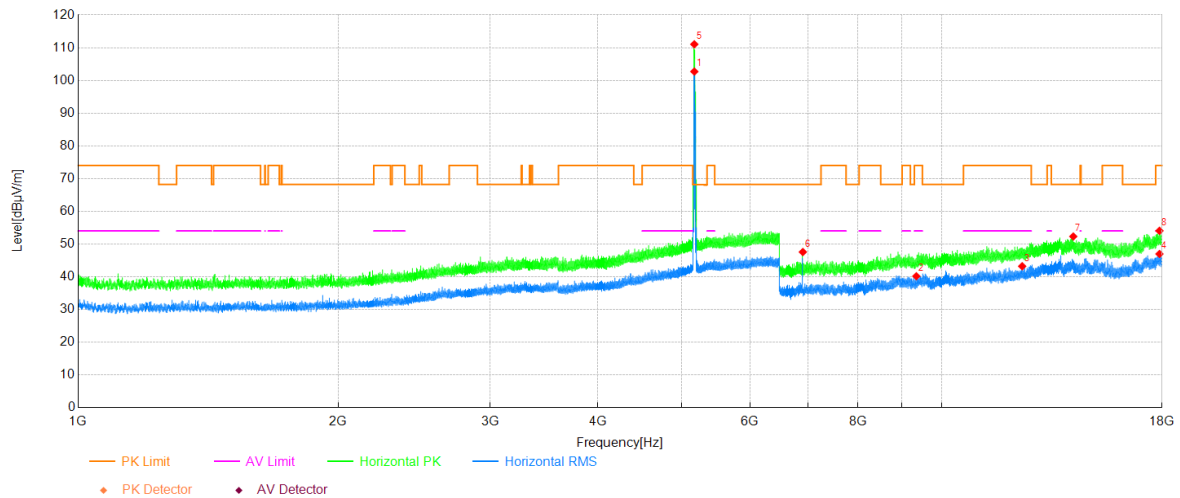Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5171.34	90.84	11.87	102.71	-	-	Horizontal	NA
2	9347.88	37.48	2.69	40.17	54.00	13.83	Horizontal	PASS
3	12396.63	36.77	6.44	43.21	54.00	10.79	Horizontal	PASS
4	17876.95	33.34	13.64	46.98	54.00	7.02	Horizontal	PASS
5	5170.79	99.16	11.88	111.04	-	-	Horizontal	NA
6	6906.35	48.43	-0.86	47.57	68.20	20.63	Horizontal	PASS
7	14206.41	42.40	9.91	52.31	68.20	15.89	Horizontal	PASS
8	17876.56	40.42	13.64	54.06	74.00	19.94	Horizontal	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;106Tone_RU53;power setting 14.5		

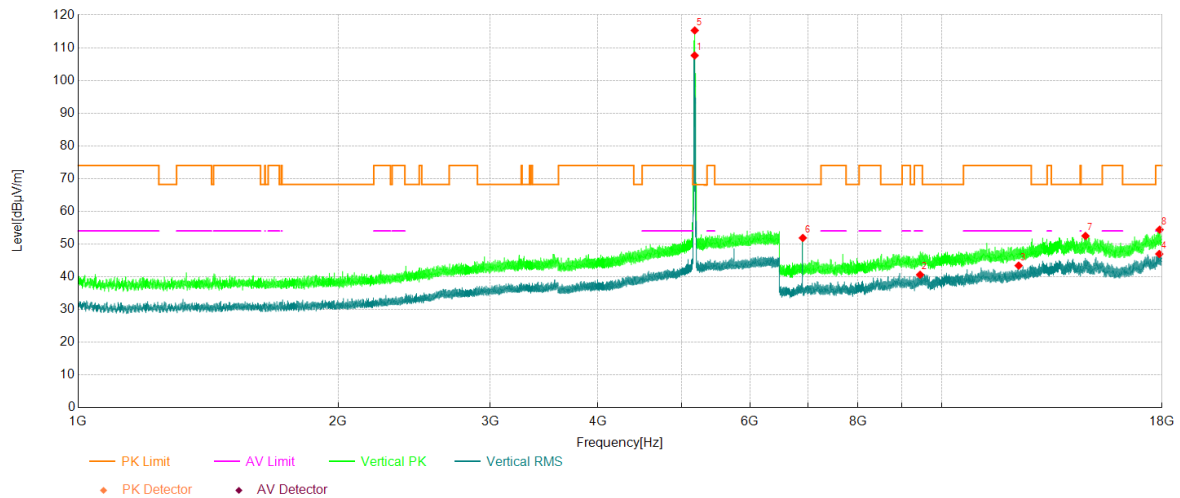
Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5176.29	95.77	11.85	107.62	-	-	Vertical	NA
2	9441.80	37.90	2.72	40.62	54.00	13.38	Vertical	PASS
3	12280.48	37.25	6.17	43.42	54.00	10.58	Vertical	PASS
4	17868.13	33.41	13.56	46.97	54.00	7.03	Vertical	PASS
5	5177.39	103.42	11.85	115.27	-	-	Vertical	NA
6	6906.73	52.73	-0.86	51.87	68.20	16.33	Vertical	PASS
7	14676.39	41.40	11.08	52.48	68.20	15.72	Vertical	PASS
8	17885.38	40.67	13.73	54.40	74.00	19.60	Vertical	PASS

Project Information

Mode:	802.11ax40	Band:	U-NII-1
Bandwidth	40MHz	Channel	38
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;242Tone_RU61;power setting 16.5		

Test Graph

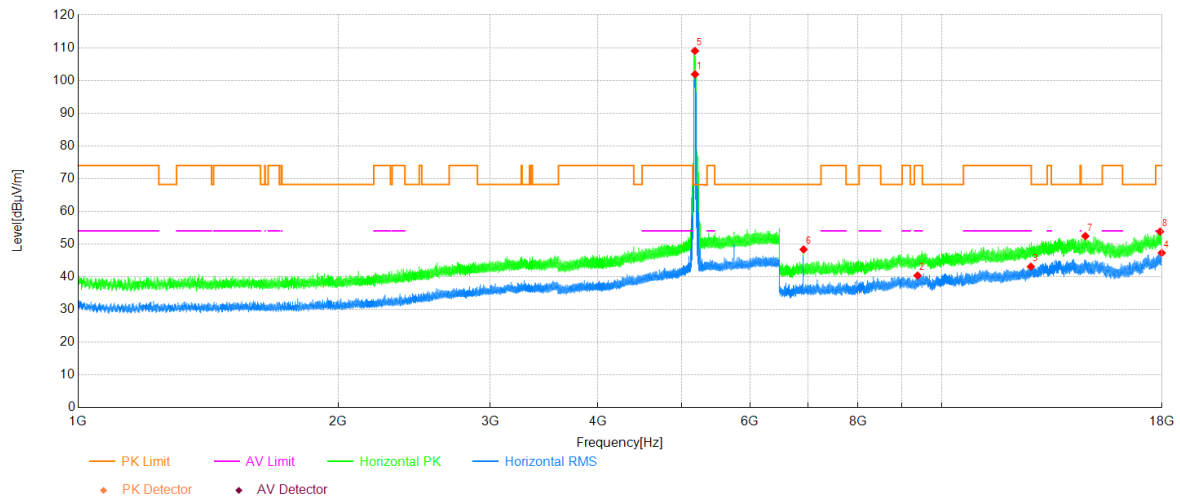


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5181.06	90.05	11.83	101.88	-	-	Horizontal	NA
2	9377.78	37.75	2.62	40.37	54.00	13.63	Horizontal	PASS
3	12687.59	35.70	7.39	43.09	54.00	10.91	Horizontal	PASS
4	17985.05	33.97	13.30	47.27	54.00	6.73	Horizontal	PASS
5	5180.14	97.19	11.83	109.02	-	-	Horizontal	NA
6	6920.15	49.21	-0.86	48.35	68.20	19.85	Horizontal	PASS
7	14671.02	41.47	10.96	52.43	68.20	15.77	Horizontal	PASS
8	17906.85	39.96	13.84	53.80	74.00	20.20	Horizontal	PASS

Project Information

Mode:	802.11ax40	Band:	U-NII-1
Bandwidth	40MHz	Channel	38
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;242Tone_RU61;power setting 16.5		

Test Graph

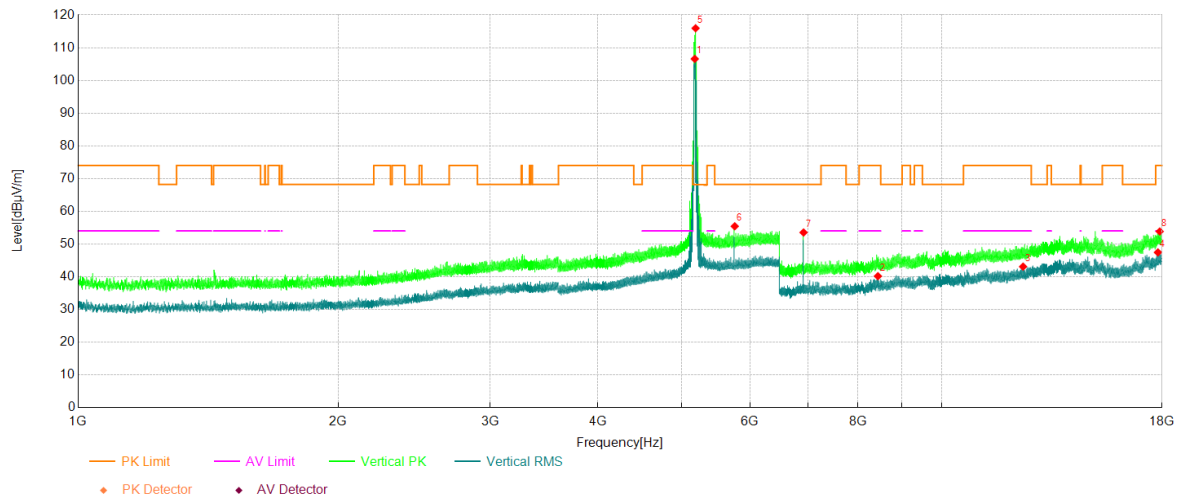


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5177.39	94.73	11.85	106.58	-	-	Vertical	NA
2	8437.43	38.52	1.66	40.18	54.00	13.82	Vertical	PASS
3	12425.76	36.71	6.39	43.10	54.00	10.90	Vertical	PASS
4	17804.11	34.54	12.90	47.44	54.00	6.56	Vertical	PASS
5	5188.57	104.15	11.79	115.94	-	-	Vertical	NA
6	5759.68	42.70	12.73	55.43	68.20	12.77	Vertical	PASS
7	6920.15	54.39	-0.86	53.53	68.20	14.67	Vertical	PASS
8	17888.45	40.07	13.77	53.84	74.00	20.16	Vertical	PASS

Project Information

Mode:	802.11ax80	Band:	U-NII-1
Bandwidth	80MHz	Channel	42
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;484Tone_RU65;power setting 16.5		

Test Graph

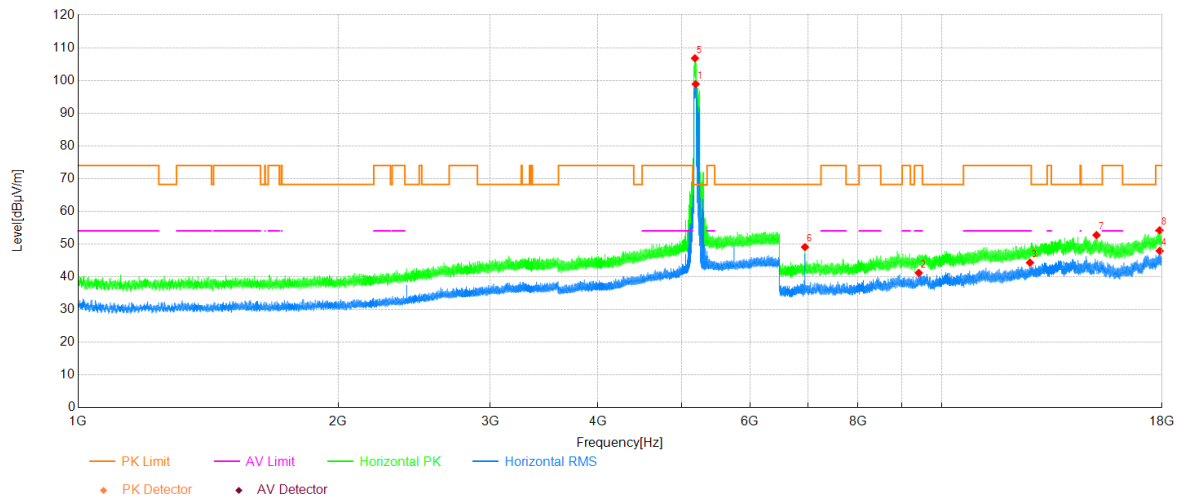


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5190.41	87.11	11.78	98.89	-	-	Horizontal	NA
2	9407.68	38.60	2.59	41.19	54.00	12.81	Horizontal	PASS
3	12658.84	37.22	7.09	44.31	54.00	9.69	Horizontal	PASS
4	17889.21	34.15	13.77	47.92	54.00	6.08	Horizontal	PASS
5	5180.14	94.94	11.83	106.77	-	-	Horizontal	NA
6	6946.60	49.96	-0.88	49.08	68.20	19.12	Horizontal	PASS
7	15114.55	42.13	10.60	52.73	68.20	15.47	Horizontal	PASS
8	17885.76	40.48	13.73	54.21	74.00	19.79	Horizontal	PASS

Project Information

Mode:	802.11ax80	Band:	U-NII-1
Bandwidth	80MHz	Channel	42
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;484Tone_RU65;power setting 16.5		

Test Graph

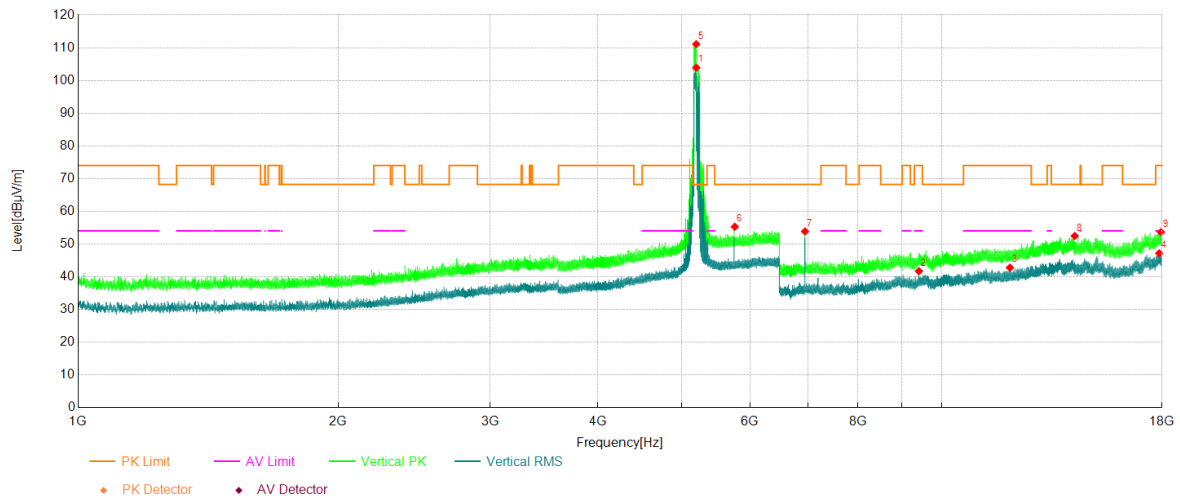


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5197.92	92.13	11.75	103.88	-	-	Vertical	NA
2	9412.66	39.11	2.61	41.72	54.00	12.28	Vertical	PASS
3	11997.57	37.19	5.60	42.79	54.00	11.21	Vertical	PASS
4	17862.76	33.66	13.50	47.16	54.00	6.84	Vertical	PASS
5	5197.74	99.33	11.75	111.08	-	-	Vertical	NA
6	5760.04	42.54	12.73	55.27	68.20	12.93	Vertical	PASS
7	6946.60	54.73	-0.88	53.85	68.20	14.35	Vertical	PASS
8	14259.31	42.90	9.56	52.46	68.20	15.74	Vertical	PASS
9	17944.41	40.06	13.58	53.64	74.00	20.36	Vertical	PASS

Project Information

Mode:	802.11ax160	Band:	U-NII-1&2A
Bandwidth	160MHz	Channel	50
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;996Tone_RU67;power setting 13.5		

Test Graph

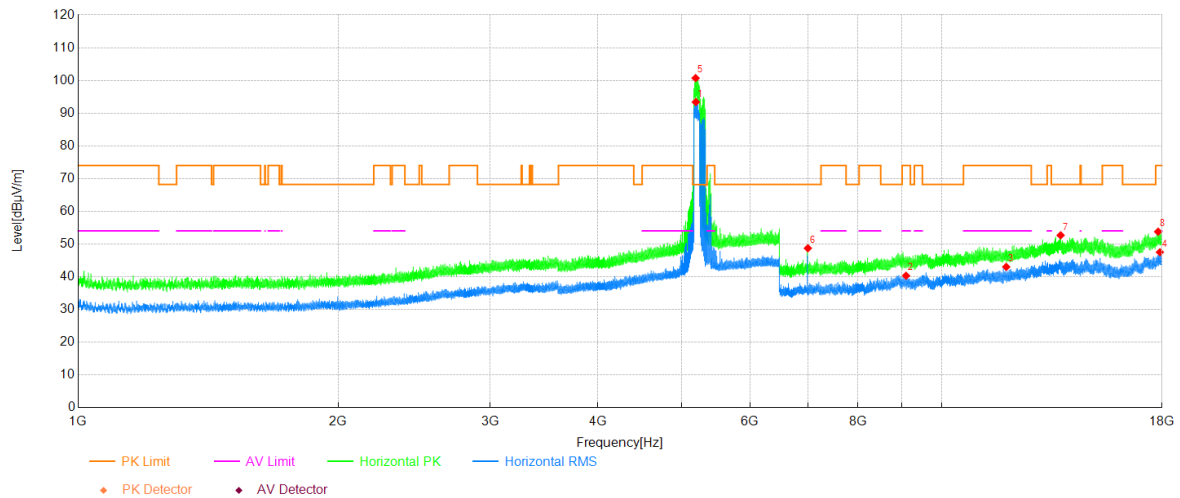


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5192.24	81.60	11.78	93.38	-	-	Horizontal	NA
2	9095.25	37.45	2.87	40.32	54.00	13.68	Horizontal	PASS
3	11881.41	37.00	6.02	43.02	54.00	10.98	Horizontal	PASS
4	17898.41	33.63	13.87	47.50	54.00	6.50	Horizontal	PASS
5	5188.94	88.92	11.79	100.71	-	-	Horizontal	NA
6	6999.88	49.62	-0.90	48.72	68.20	19.48	Horizontal	PASS
7	13734.51	43.07	9.60	52.67	68.20	15.53	Horizontal	PASS
8	17811.78	40.80	12.98	53.78	74.00	20.22	Horizontal	PASS

Project Information

Mode:	802.11ax160	Band:	U-NII-1&2A
Bandwidth	160MHz	Channel	50
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;996Tone_RU67;power setting 13.5		

Test Graph

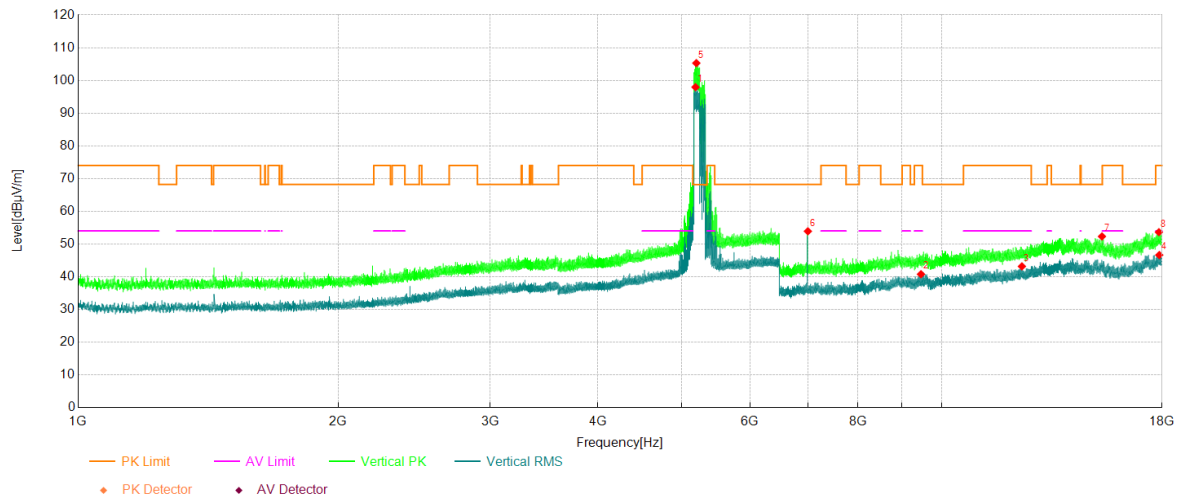


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5187.47	86.14	11.80	97.94	-	-	Vertical	NA
2	9464.42	37.92	2.86	40.78	54.00	13.22	Vertical	PASS
3	12387.43	36.78	6.40	43.18	54.00	10.82	Vertical	PASS
4	17868.51	33.09	13.56	46.65	54.00	7.35	Vertical	PASS
5	5199.21	93.54	11.74	105.28	-	-	Vertical	NA
6	6999.88	54.81	-0.90	53.91	68.20	14.29	Vertical	PASS
7	15334.98	42.45	9.87	52.32	68.20	15.88	Vertical	PASS
8	17849.73	40.25	13.37	53.62	74.00	20.38	Vertical	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;26Tone_RU8;power setting 8.5		

Test Graph

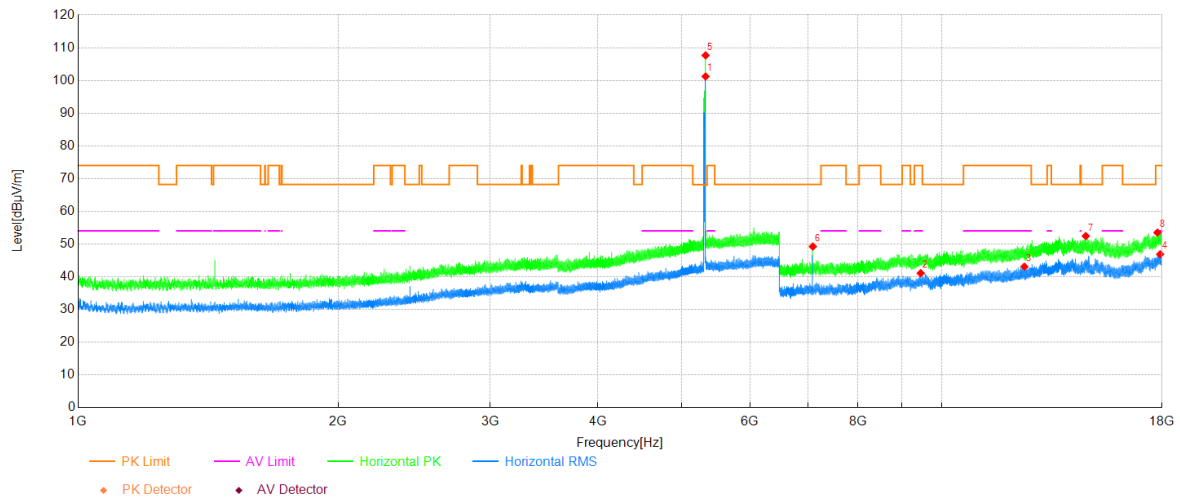


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5328.83	89.27	11.94	101.21	-	-	Horizontal	NA
2	9457.90	38.29	2.81	41.10	54.00	12.90	Horizontal	PASS
3	12469.85	36.81	6.28	43.09	54.00	10.91	Horizontal	PASS
4	17911.06	33.09	13.80	46.89	54.00	7.11	Horizontal	PASS
5	5329.19	95.71	11.94	107.65	-	-	Horizontal	NA
6	7093.04	49.65	-0.41	49.24	68.20	18.96	Horizontal	PASS
7	14686.36	41.15	11.29	52.44	68.20	15.76	Horizontal	PASS
8	17781.49	40.84	12.66	53.50	74.00	20.50	Horizontal	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;26Tone_RU8;power setting 8.5		

Test Graph

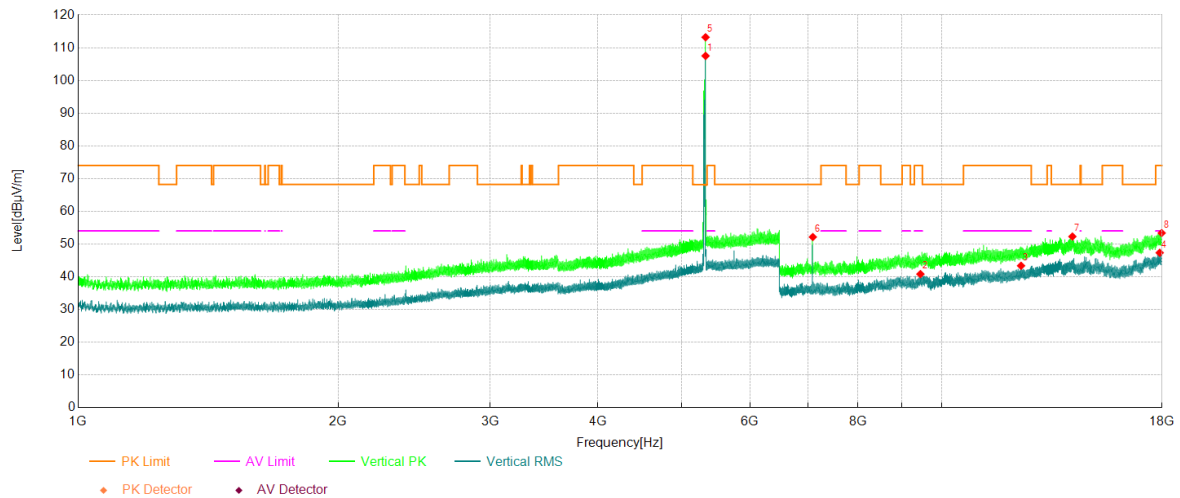


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5328.83	95.55	11.94	107.49	-	-	Vertical	NA
2	9449.85	38.07	2.75	40.82	54.00	13.18	Vertical	PASS
3	12359.45	37.05	6.32	43.37	54.00	10.63	Vertical	PASS
4	17887.68	33.58	13.76	47.34	54.00	6.66	Vertical	PASS
5	5328.46	101.25	11.94	113.19	-	-	Vertical	NA
6	7093.42	52.56	-0.41	52.15	68.20	16.05	Vertical	PASS
7	14172.29	42.52	9.77	52.29	68.20	15.91	Vertical	PASS
8	17983.13	40.05	13.31	53.36	74.00	20.64	Vertical	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;52Tone_RU40;power setting 13.5		

Test Graph

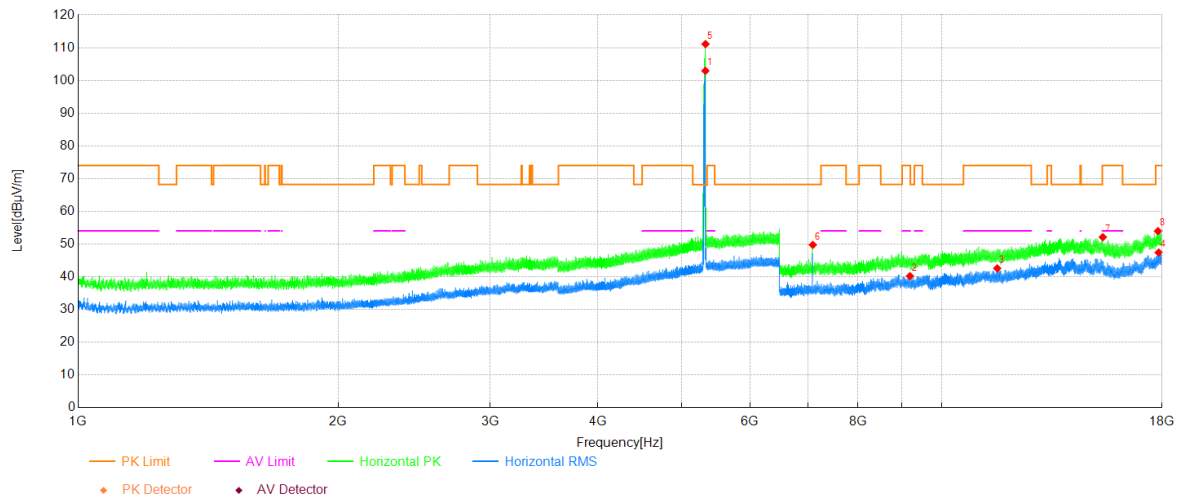


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5326.44	91.01	11.92	102.93	-	-	Horizontal	NA
2	9191.47	36.94	3.26	40.20	54.00	13.80	Horizontal	PASS
3	11597.74	36.52	6.07	42.59	54.00	11.41	Horizontal	PASS
4	17840.91	34.12	13.28	47.40	54.00	6.60	Horizontal	PASS
5	5327.73	99.17	11.93	111.10	-	-	Horizontal	NA
6	7093.42	50.15	-0.41	49.74	68.20	18.46	Horizontal	PASS
7	15368.71	42.33	9.78	52.11	74.00	21.89	Horizontal	PASS
8	17806.79	41.02	12.93	53.95	74.00	20.05	Horizontal	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;52Tone_RU40;power setting 13.5		

Test Graph

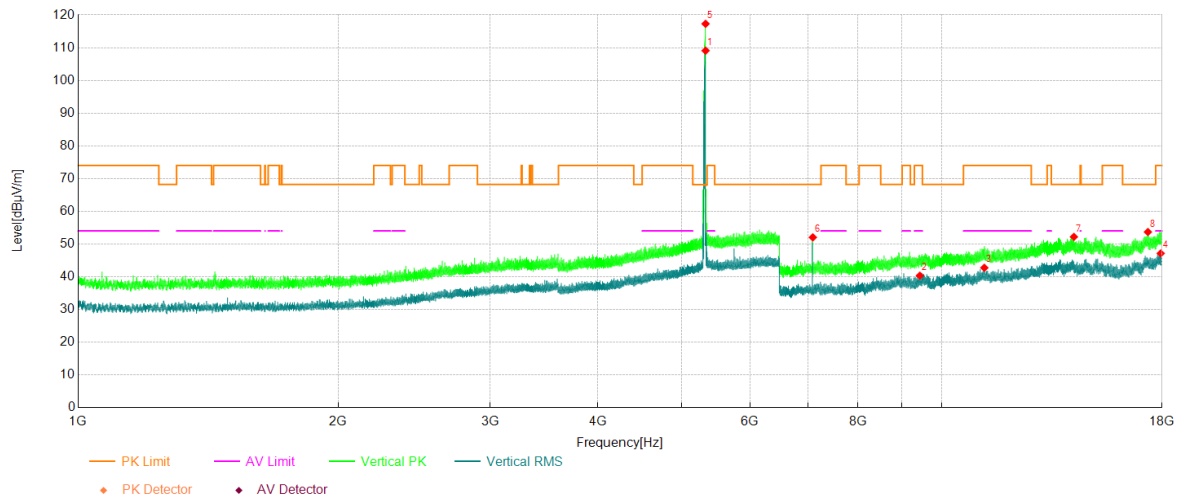


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5329.19	97.16	11.94	109.10	-	-	Vertical	NA
2	9435.28	37.64	2.69	40.33	54.00	13.67	Vertical	PASS
3	11206.72	36.83	5.92	42.75	54.00	11.25	Vertical	PASS
4	17935.60	33.50	13.64	47.14	54.00	6.86	Vertical	PASS
5	5328.46	105.35	11.94	117.29	-	-	Vertical	NA
6	7093.42	52.45	-0.41	52.04	68.20	16.16	Vertical	PASS
7	14229.41	42.44	9.76	52.20	68.20	16.00	Vertical	PASS
8	17333.74	42.02	11.66	53.68	68.20	14.52	Vertical	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;106Tone_RU54;power setting 14.5		

Test Graph

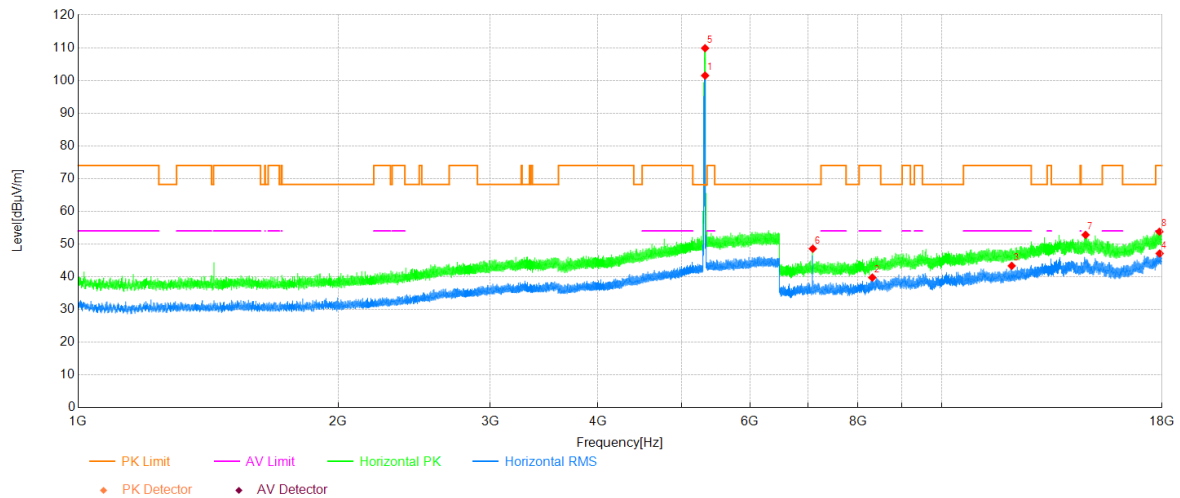


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5322.04	89.60	11.88	101.48	-	-	Horizontal	NA
2	8312.08	38.90	0.86	39.76	54.00	14.24	Horizontal	PASS
3	12055.84	37.52	5.82	43.34	54.00	10.66	Horizontal	PASS
4	17888.06	33.35	13.76	47.11	54.00	6.89	Horizontal	PASS
5	5321.86	97.97	11.88	109.85	-	-	Horizontal	NA
6	7093.42	48.98	-0.41	48.57	68.20	19.63	Horizontal	PASS
7	14679.84	41.66	11.15	52.81	68.20	15.39	Horizontal	PASS
8	17874.26	40.16	13.62	53.78	74.00	20.22	Horizontal	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;106Tone_RU54;power setting 14.5		

Test Graph

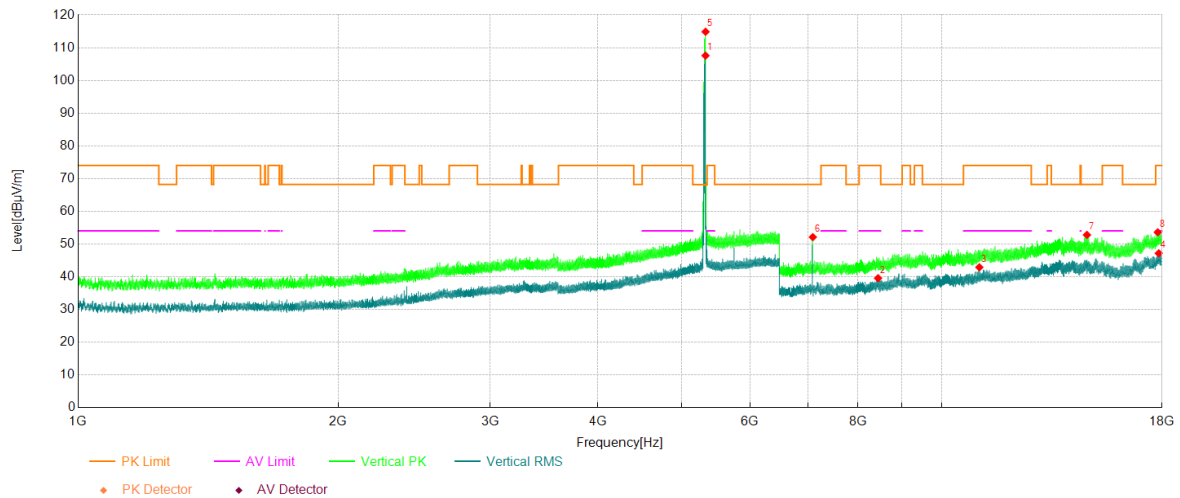


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5328.09	95.66	11.93	107.59	-	-	Vertical	NA
2	8440.88	37.88	1.68	39.56	54.00	14.44	Vertical	PASS
3	11057.99	37.34	5.56	42.90	54.00	11.10	Vertical	PASS
4	17843.59	33.85	13.31	47.16	54.00	6.84	Vertical	PASS
5	5328.64	102.94	11.94	114.88	-	-	Vertical	NA
6	7093.42	52.53	-0.41	52.12	68.20	16.08	Vertical	PASS
7	14734.27	41.64	11.15	52.79	68.20	15.41	Vertical	PASS
8	17797.59	40.76	12.83	53.59	74.00	20.41	Vertical	PASS

Project Information

Mode:	802.11ax40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	62
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;242Tone_RU62;power setting 16		

Test Graph

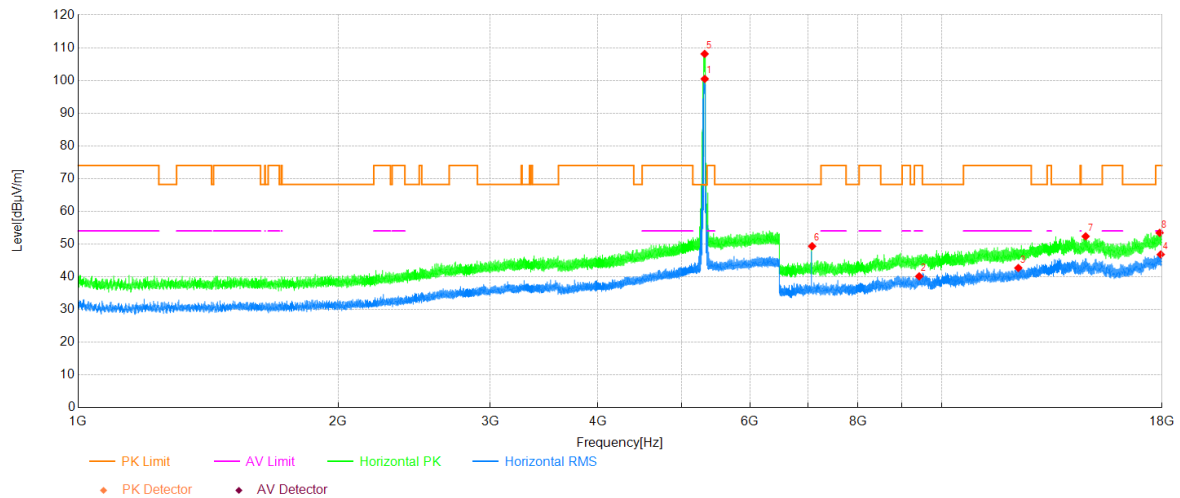


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5316.91	88.63	11.83	100.46	-	-	Horizontal	NA
2	9419.56	37.50	2.63	40.13	54.00	13.87	Horizontal	PASS
3	12269.74	36.50	6.19	42.69	54.00	11.31	Horizontal	PASS
4	17939.43	33.21	13.61	46.82	54.00	7.18	Horizontal	PASS
5	5315.63	96.28	11.82	108.10	-	-	Horizontal	NA
6	7080.00	49.80	-0.46	49.34	68.20	18.86	Horizontal	PASS
7	14682.91	41.14	11.22	52.36	68.20	15.84	Horizontal	PASS
8	17885.00	39.69	13.73	53.42	74.00	20.58	Horizontal	PASS

Project Information

Mode:	802.11ax40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	62
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;242Tone_RU62;power setting 16		

Test Graph

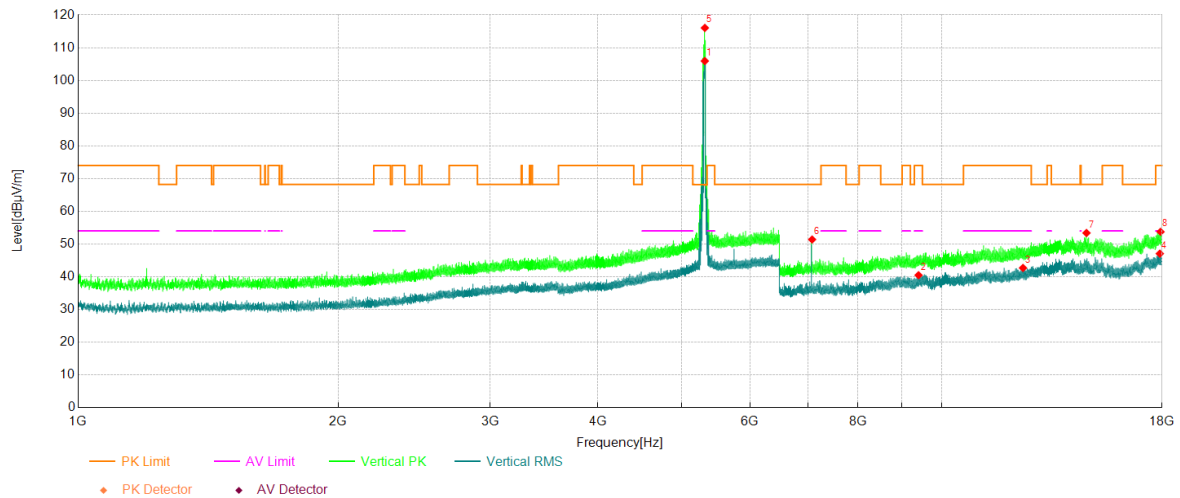


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5318.01	94.09	11.84	105.93	-	-	Vertical	NA
2	9403.08	37.91	2.57	40.48	54.00	13.52	Vertical	PASS
3	12423.46	36.31	6.39	42.70	54.00	11.30	Vertical	PASS
4	17892.66	33.25	13.81	47.06	54.00	6.94	Vertical	PASS
5	5318.38	104.20	11.85	116.05	-	-	Vertical	NA
6	7080.00	51.85	-0.46	51.39	68.20	16.81	Vertical	PASS
7	14715.49	42.00	11.38	53.38	68.20	14.82	Vertical	PASS
8	17928.31	40.06	13.68	53.74	74.00	20.26	Vertical	PASS

Project Information

Mode:	802.11ax80	Band:	U-NII-2A
Bandwidth	80MHz	Channel	58
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;484Tone_RU65;power setting 15.5		

Test Graph

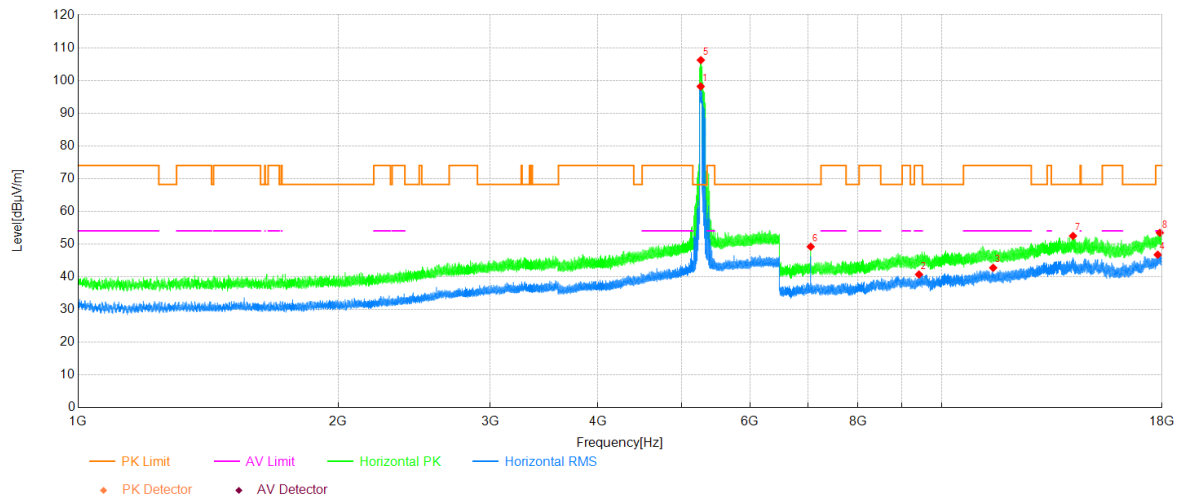


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5260.08	86.65	11.51	98.16	-	-	Horizontal	NA
2	9414.96	38.09	2.62	40.71	54.00	13.29	Horizontal	PASS
3	11473.92	37.20	5.55	42.75	54.00	11.25	Horizontal	PASS
4	17794.14	33.95	12.80	46.75	54.00	7.25	Horizontal	PASS
5	5261.36	94.68	11.52	106.20	-	-	Horizontal	NA
6	7053.17	49.78	-0.58	49.20	68.20	19.00	Horizontal	PASS
7	14197.21	42.54	9.94	52.48	68.20	15.72	Horizontal	PASS
8	17894.58	39.61	13.83	53.44	74.00	20.56	Horizontal	PASS

Project Information

Mode:	802.11ax80	Band:	U-NII-2A
Bandwidth	80MHz	Channel	58
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;484Tone_RU65;power setting 15.5		

Test Graph

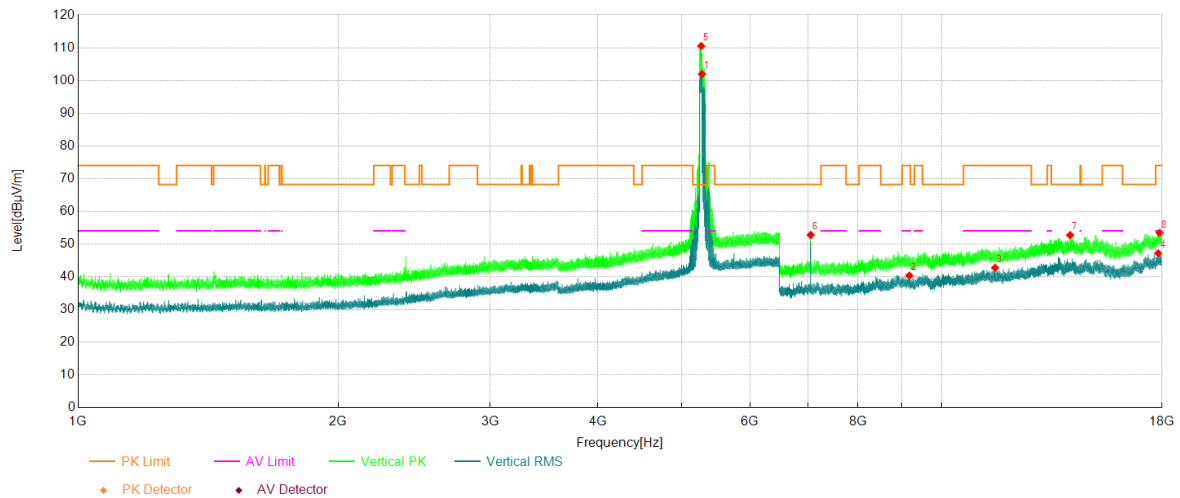


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5278.04	90.36	11.59	101.95	-	-	Vertical	NA
2	9174.99	37.12	3.24	40.36	54.00	13.64	Vertical	PASS
3	11531.80	37.05	5.71	42.76	54.00	11.24	Vertical	PASS
4	17817.14	34.14	13.03	47.17	54.00	6.83	Vertical	PASS
5	5267.59	98.97	11.54	110.51	-	-	Vertical	NA
6	7053.17	53.36	-0.58	52.78	68.20	15.42	Vertical	PASS
7	14086.42	43.43	9.30	52.73	68.20	15.47	Vertical	PASS
8	17888.06	39.65	13.76	53.41	74.00	20.59	Vertical	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-2C
Bandwidth	20MHz	Channel	100
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;26Tone_RU0;power setting 8.5		

Test Graph

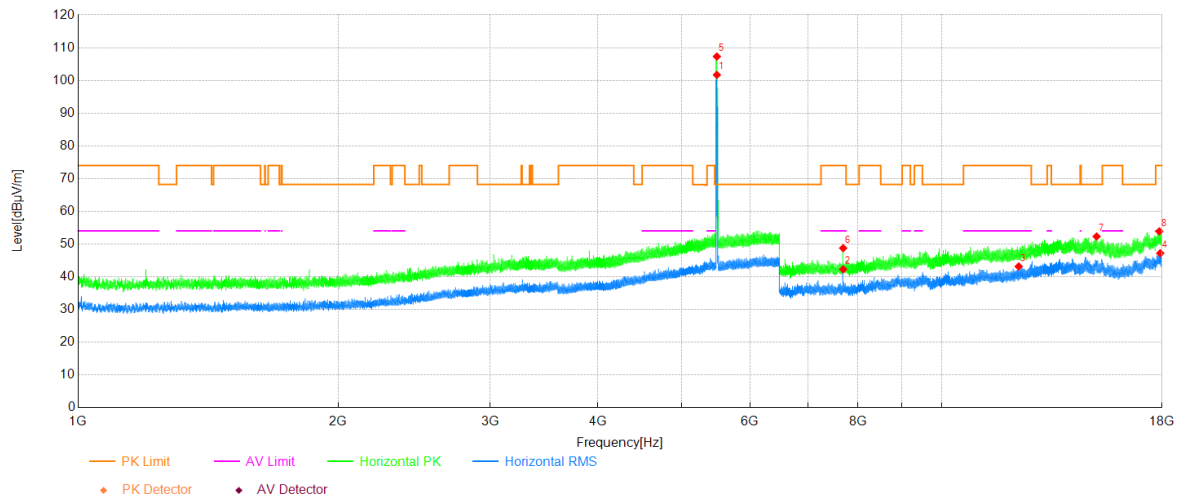


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5491.82	89.28	12.41	101.69	-	-	Horizontal	NA
2	7692.21	41.84	0.44	42.28	54.00	11.72	Horizontal	PASS
3	12281.63	36.99	6.17	43.16	54.00	10.84	Horizontal	PASS
4	17915.66	33.44	13.77	47.21	54.00	6.79	Horizontal	PASS
5	5491.45	94.89	12.41	107.30	-	-	Horizontal	NA
6	7691.06	48.32	0.43	48.75	74.00	25.25	Horizontal	PASS
7	15117.24	41.74	10.57	52.31	68.20	15.89	Horizontal	PASS
8	17866.60	40.35	13.54	53.89	74.00	20.11	Horizontal	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-2C
Bandwidth	20MHz	Channel	100
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;26Tone_RU0;power setting 8.5		

Test Graph

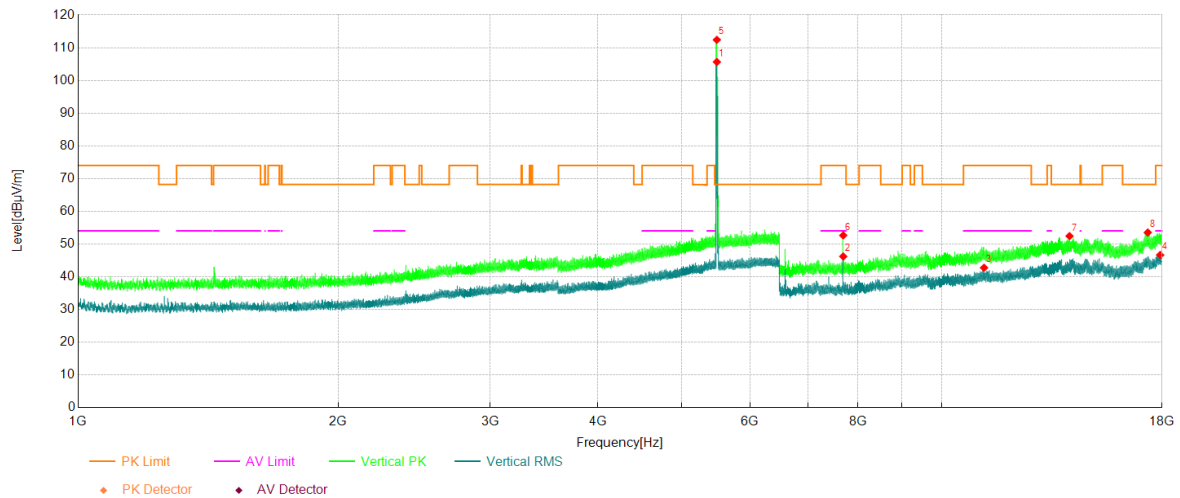


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5491.82	93.24	12.41	105.65	-	-	Vertical	NA
2	7692.21	45.77	0.44	46.21	54.00	7.79	Vertical	PASS
3	11198.67	36.85	5.91	42.76	54.00	11.24	Vertical	PASS
4	17911.06	32.86	13.80	46.66	54.00	7.34	Vertical	PASS
5	5491.45	99.99	12.41	112.40	-	-	Vertical	NA
6	7692.21	52.21	0.44	52.65	74.00	21.35	Vertical	PASS
7	14065.72	43.08	9.35	52.43	68.20	15.77	Vertical	PASS
8	17327.61	41.86	11.67	53.53	68.20	14.67	Vertical	PASS

Project Information

Mode:	802.11ax20	Band:	U-NII-2C
Bandwidth	20MHz	Channel	100
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;52Tone_RU37;power setting 11.5		


Test Graph

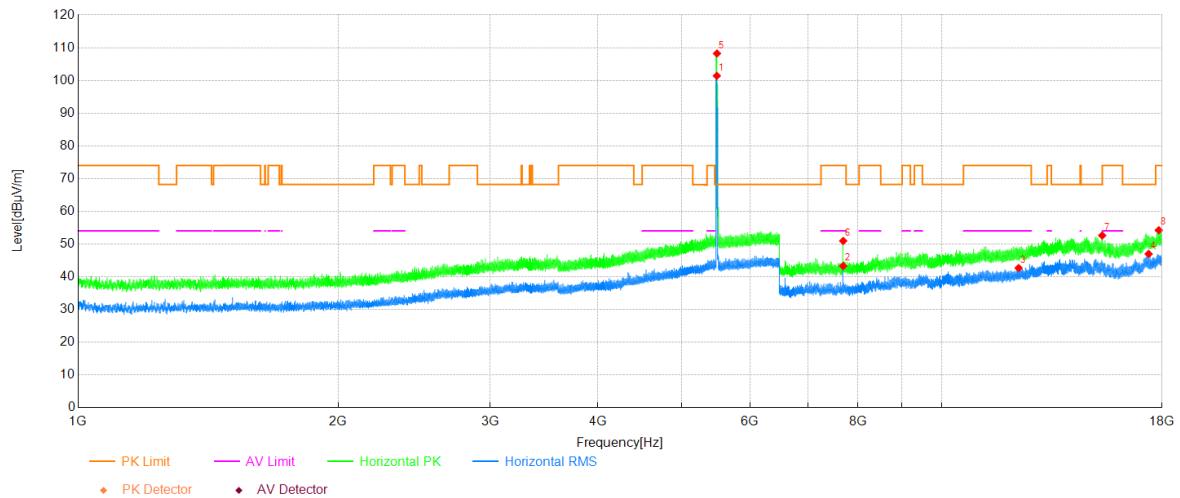

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5491.27	89.00	12.41	101.41	-	-	Horizontal	NA
2	7691.44	42.86	0.43	43.29	54.00	10.71	Horizontal	PASS
3	12280.09	36.50	6.17	42.67	54.00	11.33	Horizontal	PASS
4	17367.10	35.32	11.66	46.98	-	-	Horizontal	NA
5	5492.92	95.82	12.41	108.23	-	-	Horizontal	NA
6	7691.06	50.53	0.43	50.96	74.00	23.04	Horizontal	PASS
7	15343.03	42.77	9.85	52.62	68.20	15.58	Horizontal	PASS
8	17845.51	40.92	13.32	54.24	74.00	19.76	Horizontal	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-2C
Bandwidth	20MHz	Channel	100
SN:	dbb88090	Engineer:	Tian Shuo
Remark:	X;52Tone_RU37;power setting 11.5		

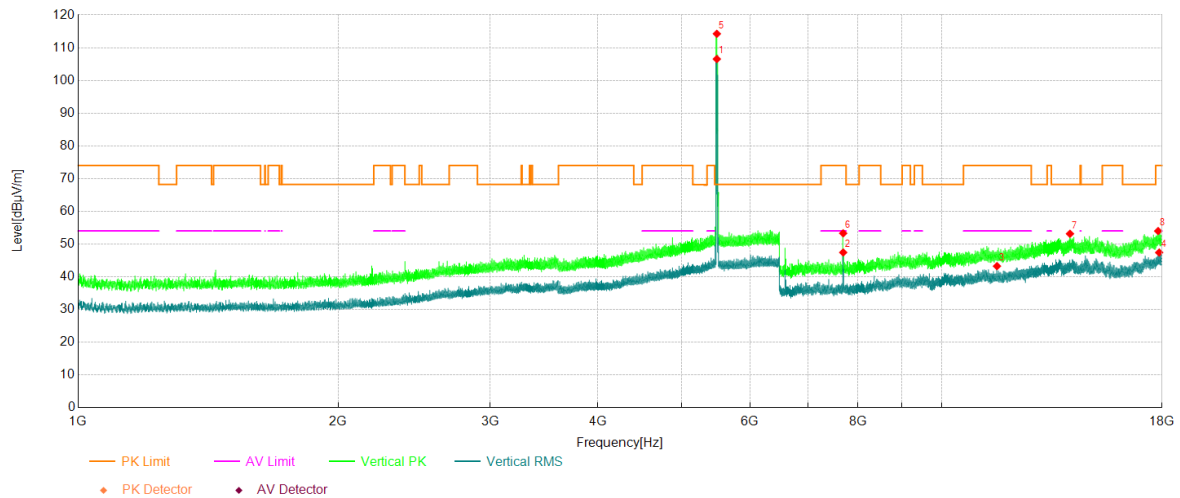Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5491.27	94.13	12.41	106.54	-	-	Vertical	NA
2	7691.82	47.00	0.43	47.43	54.00	6.57	Vertical	PASS
3	11590.84	37.22	6.03	43.25	54.00	10.75	Vertical	PASS
4	17863.53	33.90	13.51	47.41	54.00	6.59	Vertical	PASS
5	5491.45	101.83	12.41	114.24	-	-	Vertical	NA
6	7691.44	52.85	0.43	53.28	74.00	20.72	Vertical	PASS
7	14081.05	43.82	9.32	53.14	68.20	15.06	Vertical	PASS
8	17813.69	40.98	13.00	53.98	74.00	20.02	Vertical	PASS