



RADIO TEST REPORT

FCC ID : UDX-CW9177I
Equipment : Cisco Wireless 9177I Series Wi-Fi 7 Access Point
Brand Name : CISCO
Model Name : CW9177I
Applicant : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Manufacturer : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Standard : 47 CFR FCC Part 15.247

The product was received on Jan. 05, 2026, and testing was started from Jan. 16, 2026 and completed on Jul. 09, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	12
1.3 Testing Location Information	12
1.4 Measurement Uncertainty	13
2 Test Configuration of EUT	14
2.1 Test Channel Mode	14
2.2 The Worst Case Measurement Configuration	17
2.3 EUT Operation during Test	19
2.4 Accessories	19
2.5 Support Equipment.....	20
2.6 Test Setup Diagram	21
3 Transmitter Test Result	25
3.1 AC Power-line Conducted Emissions	25
3.2 DTS Bandwidth.....	27
3.3 Maximum Conducted Output Power	28
3.4 Power Spectral Density	30
3.5 Emissions in Non-restricted Frequency Bands	32
3.6 Emissions in Restricted Frequency Bands.....	33
4 Test Equipment and Calibration Data	38
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_10 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Sophia Shiung**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), VHT20, ax (HEW20), be (EHT20)	2412-2462	1-11 [11]

<Scan Radio 0>

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11 b, 802.11 g, 802.11 n HT20, VHT20, 802.11 ax HEW20	20	2TX/2RX

<Radio 1>

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11 b, 802.11 g, 802.11 n HT20, VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	1, 2, 4TX/4RX
	802.11 n HT20-BF, VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2, 4TX/4RX

Note:

- 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- 11g and HT20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- VHT20 uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- HEW20 uses a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20 uses a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.


1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Cross-polar	Radio (R)
1	WNC	95XPAN15.G01	PIFA	I-Pex	V	R1/3
2	WNC	95XPAN15.G02	Dipole	I-Pex	H	R1/3
3	WNC	95XPAN15.G03	PIFA	I-Pex	V	R1/3
4	WNC	95XPAN15.G04	Dipole	I-Pex	H	R1/3
5	WNC	95XPAN15.G05	PIFA	I-Pex	V	R2
6	WNC	95XPAN15.G06	Dipole	I-Pex	H	R2
7	WNC	95XPAN15.G07	PIFA	I-Pex	V	R2
8	WNC	95XPAN15.G08	Dipole	I-Pex	H	R2
9	WNC	95XPAN15.G09	PIFA	I-Pex	V	R0
10	WNC	95XPAN15.G10	PIFA	I-Pex	V	R0
11	WNC	95XPAN15.G11	PIFA	I-Pex	V	R4
12	WNC	95XPAN15.G12	PIFA	I-Pex	V	R5
13	WNC	81VEAR15.G01	Patch	SMA	V	R5

Ant.	Port / Radio (R)		Composite Gain (dBi)					Ant. Gain above 30 degrees (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 2.4GHz	WLAN 5GHz				WLAN 5GHz
	R1	R3		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 1
1	1	1	3.26	6.39	5.94	4.72	4.1	-2.9
2	2	2	4.94	3.79	4.08	3.73	5.4	-6.7
3	3	3	2.51	5.67	5.38	4.71	4.38	-2.9
4	4	4	4.47	3.92	4.23	4.25	3.79	-6.3

Ant.	Port / Radio (R)		Composite Gain (dBi)					Ant. Gain above 30 degrees (dBi)		
	WLAN 5/6GHz		WLAN 5GHz		WLAN 6GHz			WLAN 6GHz		
	R2		UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 5	UNII 6	UNII 7
5	1		3.57	4.71	5.5	5.4	6.47	-3.8	-3.3	-3.7
6	2		6.43	5.77	5.44	5.31	5.31	-9	-6	-5.4
7	3		4.1	3.46	4.13	4.65	4.7	-4	-3.5	-3
8	4		5.31	5.06	5.81	6.52	6.51	-9.3	-6.4	-6.1

Ant.	Port / Radio (R)	Composite Gain (dBi)							
	WLAN 2.4/5/6GHz	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz		
	R0		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7
9	1	4.89	4.4	4.72	5.23	5.34	5	3.66	4.13
10	2	4.61	4.09	4.77	6.19	4.88	6.57	5.01	5.5

Ant.	Port / Radio (R)		Ant. Gain above 30 degrees (dBi)			
	WLAN 2.4/5/6GHz		WLAN 5GHz		WLAN 6GHz	
	R0		UNII 1	UNII 5	UNII 6	UNII 7
9	1		-3.4	-2.1	-2	-2.3
10	2		-4	-4.1	-4	-4.3

Ant.	Port / Radio (R)		Gain (dBi)	
	BT / IEEE 802.15.4	GPS	BT / IEEE 802.15.4	GPS
	R4	R5		
11	1	-	3.3	-
12	-	1	-	3.8
13	-	1	-	2.98

Note 1: The above information was declared by manufacturer.

Note 2: States antenna 6GHz transmission will be restricted per country's regulation.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

For 2TX:

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ;$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2))^2 / N_{ANT}] \Rightarrow 10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$$

For 4TX:

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where;

Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
0	2.4GHz	2TX	4.89	4.61	-	-	7.76	-
	5GHz UNII-1	2TX	4.4	4.09	-	-	7.41	
	5GHz UNII-2A	2TX	4.72	4.77	-	-	7.78	
	5GHz UNII-2C	2TX	5.23	6.19	-	-	9.20	
	5GHz UNII-3	2TX	5.34	4.88	-	-	8.35	
	6GHz UNII-5	2TX	5	6.57	-	-	9.58	
	6GHz UNII-6	2TX	3.66	5.01	-	-	8.02	
	6GHz UNII-7	2TX	4.13	5.5	-	-	8.51	



Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
1	2.4GHz	2TX	3.26	4.94	-	-	4.94	Cross-Polarized Antenna
		4TX	3.26	4.94	2.51	4.47	6.91	
2	5GHz UNII-2C	2TX	3.57	6.43	-	-	6.43	
		4TX	3.57	6.43	4.1	5.31	7.99	
	5GHz UNII-3	2TX	4.71	5.77	-	-	5.77	
		4TX	4.71	5.77	3.46	5.06	7.82	
	6GHz UNII-5	2TX	5.5	5.44	-	-	5.5	
		4TX	5.5	5.44	4.13	5.81	8.26	
	6GHz UNII-6	2TX	5.4	5.31	-	-	5.4	
		4TX	5.4	5.31	4.65	6.52	8.52	
	6GHz UNII-7	2TX	6.47	5.31	-	-	6.47	
		4TX	6.47	5.31	4.7	6.51	8.82	
3	5GHz UNII-1	2TX	6.39	3.79	-	-	6.39	
		4TX	6.39	3.79	5.67	3.92	8.09	
	5GHz UNII-2A	2TX	5.94	4.08	-	-	5.94	
		4TX	5.94	4.08	5.38	4.23	7.99	
	5GHz UNII-2C	2TX	4.72	3.73	-	-	4.72	
		4TX	4.72	3.73	4.71	4.25	7.38	
	5GHz UNII-3	2TX	4.1	5.4	-	-	5.4	
		4TX	4.1	5.4	4.38	3.79	7.46	

For Antenna Gain above 30 degrees:

Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
2	6G UNII-5	2TX	-3.8	-9	-	-	-3.8	Cross-Polarized Antenna
		4TX	-3.8	-9	-4	-9.3	-2.76	
	6G UNII-6	2TX	-3.3	-6	-	-	-3.3	
		4TX	-3.3	-6	-3.5	-6.4	-1.57	
	6G UNII-7	2TX	-3.7	-5.4	-	-	-3.7	
		4TX	-3.7	-5.4	-3	-6.1	-1.37	
3	5G UNII-1	2TX	-2.9	-6.7	-	-	-2.9	
		4TX	-2.9	-6.7	-2.9	-6.3	-1.33	

Note 4: <Scan Radio 0>

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

**<Radio 1>****For 2.4GHz function:****For IEEE 802.11 b/g/n/VHT/ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

<Radio 2>**For 5GHz function:****For IEEE 802.11 a/n/ac/ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

For 6GHz function:**For IEEE 802.11 ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

**<Radio 3>****For 5GHz function:****For IEEE 802.11 a/n/ac/ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

<Radio 4>**For Bluetooth function (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

For IEEE 802.15.4 function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

<Radio 5>**For GPS function (1RX):**

Ant. 12~13 can be used as receiving antenna, but only one of them will be used at one time.

1.1.3 Mode Test Duty Cycle**<Scan Radio 0>**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11b_Nss 1,(1D)	0.755	1.22	687.5u	3k
802.11g_Nss 1,(6D)	0.949	0.23	2m	1k
802.11ax HEW20_Nss 1,(M0)	0.811	0.91	5.475m	300

<Radio 1>

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11b_Nss 1,(1D)	0.857	0.67	688.75u	2k
802.11g_Nss 1,(6D)	0.991	0.04	1.976m	10Hz (DC>=0.98)
802.11be EHT20_Nss 1,(M0)	0.994	0.03	5.453m	10Hz (DC>=0.98)
802.11be EHT20-BF_Nss 1,(M0)	0.994	0.03	5.453m	10Hz (DC>=0.98)

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.



1.1.4 EUT Operational Condition

EUT Power Type	From PoE, adapter or DC power supply (24~56Vdc)			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz for Radio 1, n/ac/ax/be in 5GHz for Radio 2/3 and ax/be in 6GHz for Radio 2.			
Function	☒	Point-to-multipoint	☐	Point-to-point
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	QSPR x86.exe V6.00.00231.1 & QRCT4 V4.0193.1			
Serial Number	For Others: WTT2947053X For AC Conduction and Radiated below 1GHz tests: WTT29470543			

Note: The above information was declared by manufacturer.

1.1.5 Table for SW Information

SW	BW of 5GHz Mode (MHz)	6GHz Mode	Support Function
Catalyst	20/40/80/160	Standard Power Access Point.	AP
			CURWB P2MP Master
		-	CURWB P2MP client with radar detection
Meraki	20/40/80	Standard Power Access Point.	AP

Note 1: The SW Catalyst AP mode was tested and recorded in this test report.

Note 2: The above information was declared by manufacturer.

1.1.6 Table for Radio Function

Radio (R)	Support Function	WLAN 2.4GHz	WLAN 5GHz		WLAN 6GHz	BT / IEEE 802.15.4	GPS
			UNII 1~2A	UNII 2C~3			
R0 (Scan Radio)	AP	✓	✓	✓	✓	-	-
	CURWB P2MP Master	-	✓	✓	✓	-	-
	CURWB P2MP client with radar detection	-	✓	✓	-	-	-
R1	AP	✓	-	-	-	-	-
R2	AP & CURWB P2MP Master	-	-	✓	✓	-	-
	CURWB P2MP client with radar detection	-	-	✓	-	-	-
R3 (Note 1)	AP, CURWB P2MP Master & CURWB P2MP client with radar detection	-	✓	✓	-	-	-
R4	AP	-	-	-	-	✓	-
R5	AP	-	-	-	-	-	✓

Note 1: Radio 3 supports operation in 5GHz full band (UNII 1~3) or low band (UNII 1~2A).

Note 2: For WLAN 2.4GHz, R0 and R1 can't operate at the same frequency simultaneously.

For WLAN 5GHz, R0, R2 and R3 can't operate at the same frequency simultaneously.

For WLAN 6GHz, R0 and R2 can't operate at the same frequency simultaneously.

Note 3: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Stim Sung	19.4~20.5 / 62~65	Feb. 04, 2026~ Jun. 12, 2026
Radiated < 1GHz	10CH01-CB	Stim Sung	23~24 / 56~57	Jun. 17, 2026~ Jul. 09, 2026
Radiated > 1GHz (Other tests: For R0)	03CH04-CB	Stim Sung	24.0~24.5 / 55~56	Jan. 16, 2026~ May 25, 2026
	03CH05-CB	Lex Lee	24.0~24.1 / 58~60	
Radiated > 1GHz (Other tests: For R1)	03CH05-CB	Lex Lee	24.5~24.8 / 56~62	
	03CH06-CB	Jimmy Huang	24.2~24.6 / 55~64	
Radiated > 1GHz (Co-location)	03CH05-CB	Lex Lee	23.6~24.3 / 59~65	Jun. 25, 2026
AC Conduction	CO01-CB	Allen Chung	21~22 / 57~58	Jun. 15, 2026~ Jul. 06, 2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Date: Before May 28, 2026

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%

Test Date: May 28, 2026~Jun. 30, 2026

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.5 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	3.8 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	3.5 dB	Confidence levels of 95%
Bandwidth Measurement	1.6 %	Confidence levels of 95%

Test Date: After Jun. 30, 2026

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.5 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

<Scan Radio 0>

Mode
802.11b_Nss1,(1Mbps)_2TX
2412MHz
2437MHz
2457MHz
2462MHz
802.11g_Nss1,(6Mbps)_2TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11ax HEW20_Nss1,(MCS0)_2TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz

**<Radio 1>**

Mode
802.11b_Nss1,(1Mbps)_1TX
2412MHz
2437MHz
2462MHz
802.11g_Nss1,(6Mbps)_1TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11be EHT20_Nss1,(MCS0)_1TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11b_Nss1,(1Mbps)_2TX
2412MHz
2437MHz
2457MHz
2462MHz
802.11g_Nss1,(6Mbps)_2TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11be EHT20_Nss1,(MCS0)_2TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11b_Nss1,(1Mbps)_4TX
2412MHz
2437MHz
2457MHz
2462MHz
802.11g_Nss1,(6Mbps)_4TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11be EHT20_Nss1,(MCS0)_4TX
2412MHz
2417MHz
2437MHz



Mode
2457MHz
2462MHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11be EHT20-BF_Nss1,(MCS0)_4TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz

Note:

- ♦ For Radio 0: Evaluated HEW20 mode only, due to similar modulation. The power setting of HT20 / VHT20 modes are the same or lower than HEW20.
- ♦ For Radio 1: EHT20 covers HT20 / VHT20 / HEW20 due to similar modulation. The power setting for HT20 / VHT20 / HEW20 is the same or lower than EHT20.
- ♦ For Radio 1: The EUT supports non-beamforming and beamforming modes. After evaluating, the non-beamforming mode has been evaluated to be the worst case, so it was selected to test. The beamforming mode evaluates the output power only.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT + PoE_R0: 2.4GHz
2	EUT + Adapter_R0: 2.4GHz
3	EUT + DC power supply_R0: 2.4GHz
Mode 3 has been evaluated to be the worst case among Mode 1~3, so the measurement for Mode 4~11 will follow this same test mode.	
4	EUT + DC power supply_R0: 5GHz
5	EUT + DC power supply_R0: 6GHz
6	EUT + DC power supply_R1: 2.4GHz
7	EUT + DC power supply_R2: 5GHz
8	EUT + DC power supply_R2: 6GHz
9	EUT + DC power supply_R3: 5GHz
10	EUT + DC power supply_R4: BT
11	EUT + DC power supply_R4: IEEE 802.15.4
For operating, mode 10 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests		
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands	
Test Condition	Conducted measurement at transmit chains	
Operating Mode	1	R0
	3	R1



The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
	"EUT in Y axis" generated the worst case at Radiated measurement above 1GHz. Consequently, the measurement will follow this same test mode.
1	EUT in Y axis + PoE_R0: 2.4GHz
2	EUT in Y axis + Adapter_R0: 2.4GHz
3	EUT in Y axis + DC power supply_R0: 2.4GHz
Mode 1 has been evaluated to be the worst case among Mode 1~3, so the measurement for Mode 4~11 will follow this same test mode.	
4	EUT in Y axis + PoE_R0: 5GHz
5	EUT in Y axis + PoE_R0: 6GHz
6	EUT in Y axis + PoE_R1: 2.4GHz
7	EUT in Y axis + PoE_R2: 5GHz
8	EUT in Y axis + PoE_R2: 6GHz
9	EUT in Y axis + PoE_R3: 5GHz
10	EUT in Y axis + PoE_R4: BT
11	EUT in Y axis + PoE_R4: IEEE 802.15.4
For operating, mode 10 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
	After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.
1	EUT in Y axis_R0
2	EUT in Y axis_R1

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	"EUT in Y axis" generated the worst case at Radiated measurement above 1GHz. Consequently, the measurement will follow this same test mode.
1	EUT in Y axis_R1: 2.4GHz + R3: 5GHz
Refer to Appendix G for Radiated Emission Co-location.	



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	R0: 2.4GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: BT
2	R0: 2.4GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: IEEE 802.15.4
3	R0: 5GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: BT
4	R0: 5GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: IEEE 802.15.4
5	R0: 6GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: BT
6	R0: 6GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: IEEE 802.15.4
7	R0: 2.4GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: BT
8	R0: 2.4GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: IEEE 802.15.4
9	R0: 5GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: BT
10	R0: 5GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: IEEE 802.15.4
11	R0: 6GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: BT
12	R0: 6GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: IEEE 802.15.4
Refer to Sporton Test Report No.: FA5D2458AA for Co-location RF Exposure Evaluation.	

Note: The PoEs and adapter were for measurement only and would not be marketed. Their information is listed below:

Equipment	Brand Name	Model Name
PoE 1	DELTA	ADH-65AR P
PoE 2	CISCO	POEO75U-1BT-C-R
Adapter	MW	GS60A48-CIS5UGS60A48-CIS5

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories
M25 cap*4
DC jack cap*1
SMA Sealed cap*1
M25 RJ-45 Cable gland*2
Bracket (Optional)*1



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Power Supply	MOTECH	LPS-305	N/A
B	Notebook	DELL	E6430	N/A

For Radiated < 1GHz:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 2	CISCO	POE75U-1BT-C-R	N/A
B	Notebook	DELL	E6430	N/A

For Radiated > 1GHz (Other tests):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 1	DELTA	ADH-65AR P	N/A
B	Notebook	Lenovo	L440	N/A


For Radiated > 1GHz (Co-location):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 2	CISCO	POEO75U-1BT-C-R	N/A
B	Notebook	Lenovo	L440	N/A
C	WLAN module	Intel	BE200NGW	PD9BE200NG
D	WLAN module	Intel	BE200NGW	PD9BE200NG

For RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	Lenovo	L440	N/A
B	PoE 1	DELTA	ADH-65AR P	N/A

2.6 Test Setup Diagram

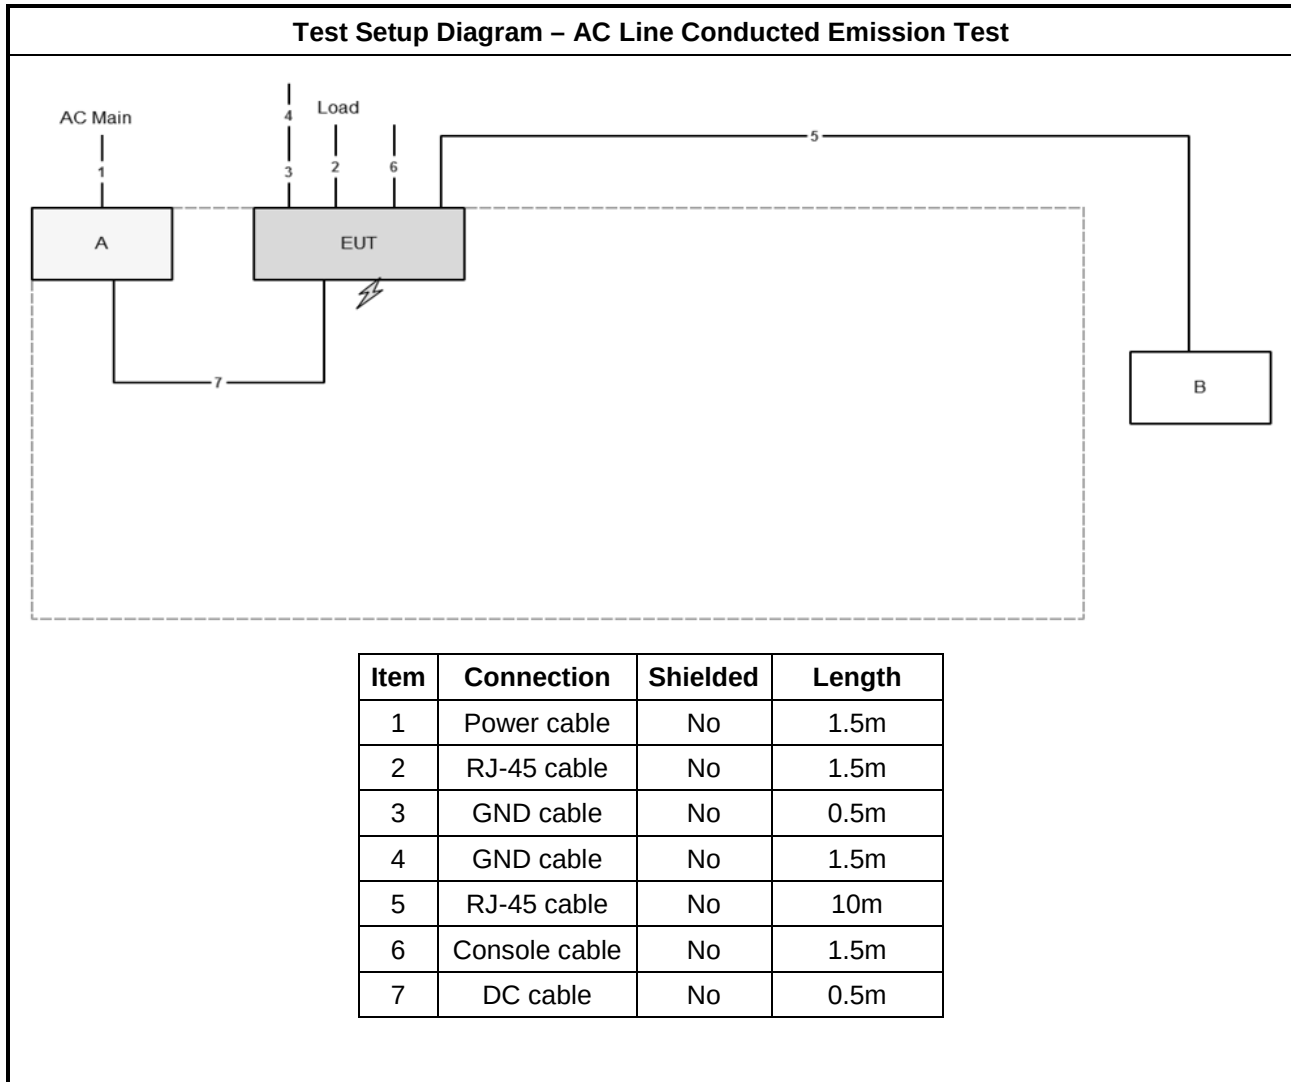


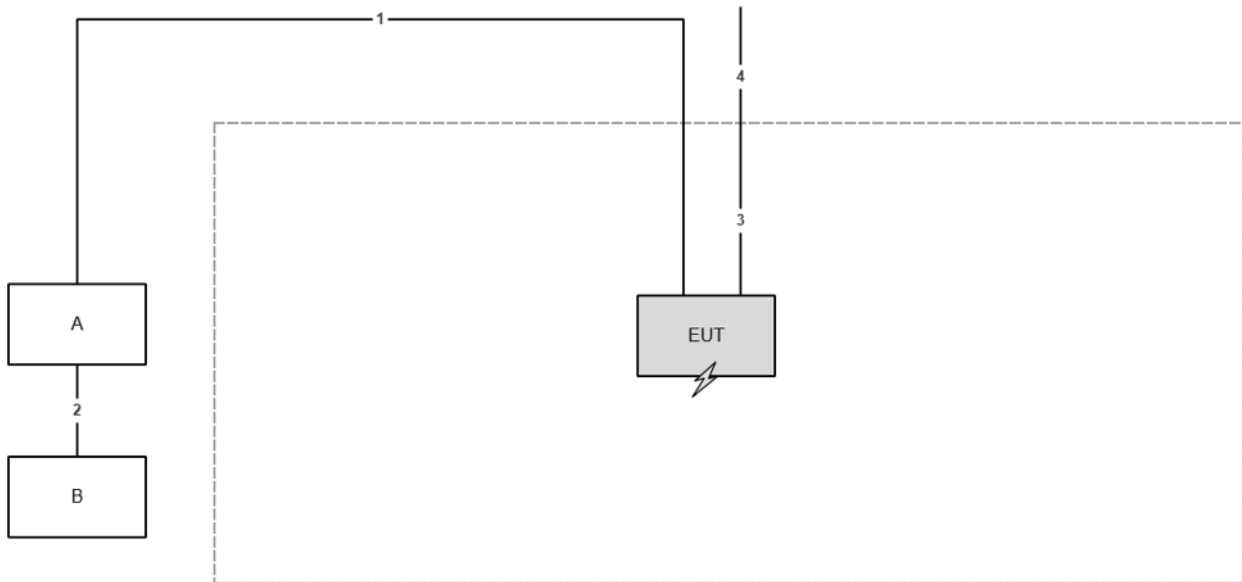Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	GND cable	No	0.5m
4	GND cable	No	1.5m

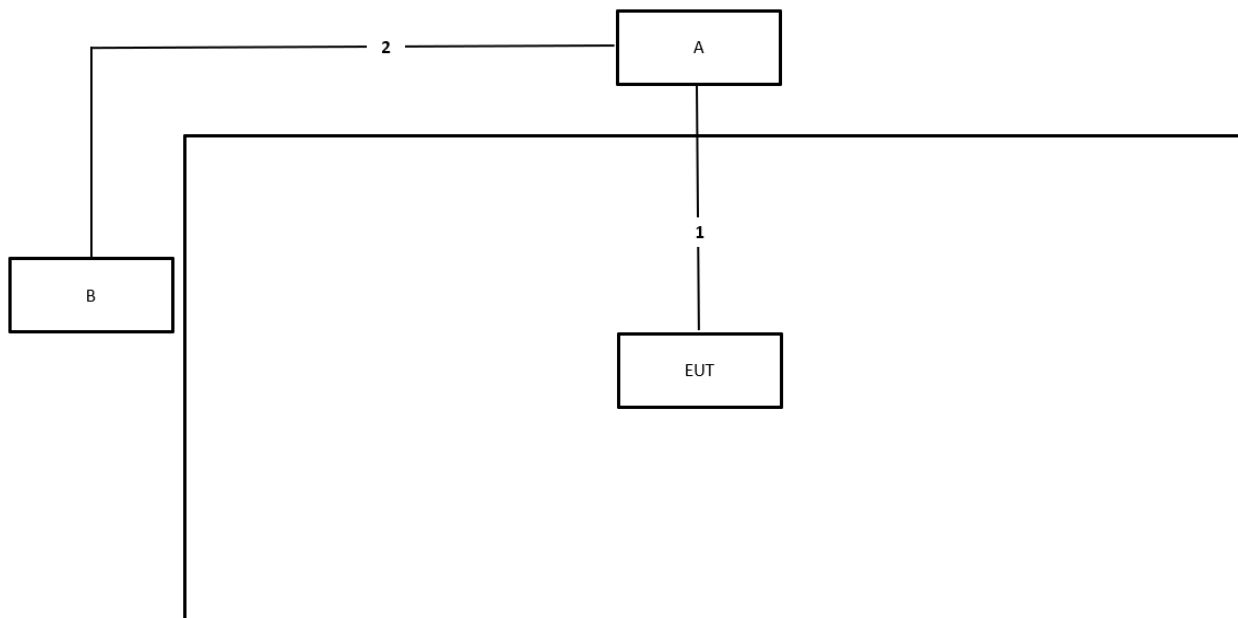Test Setup Diagram - Radiated Test > 1GHz (Other tests)


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m

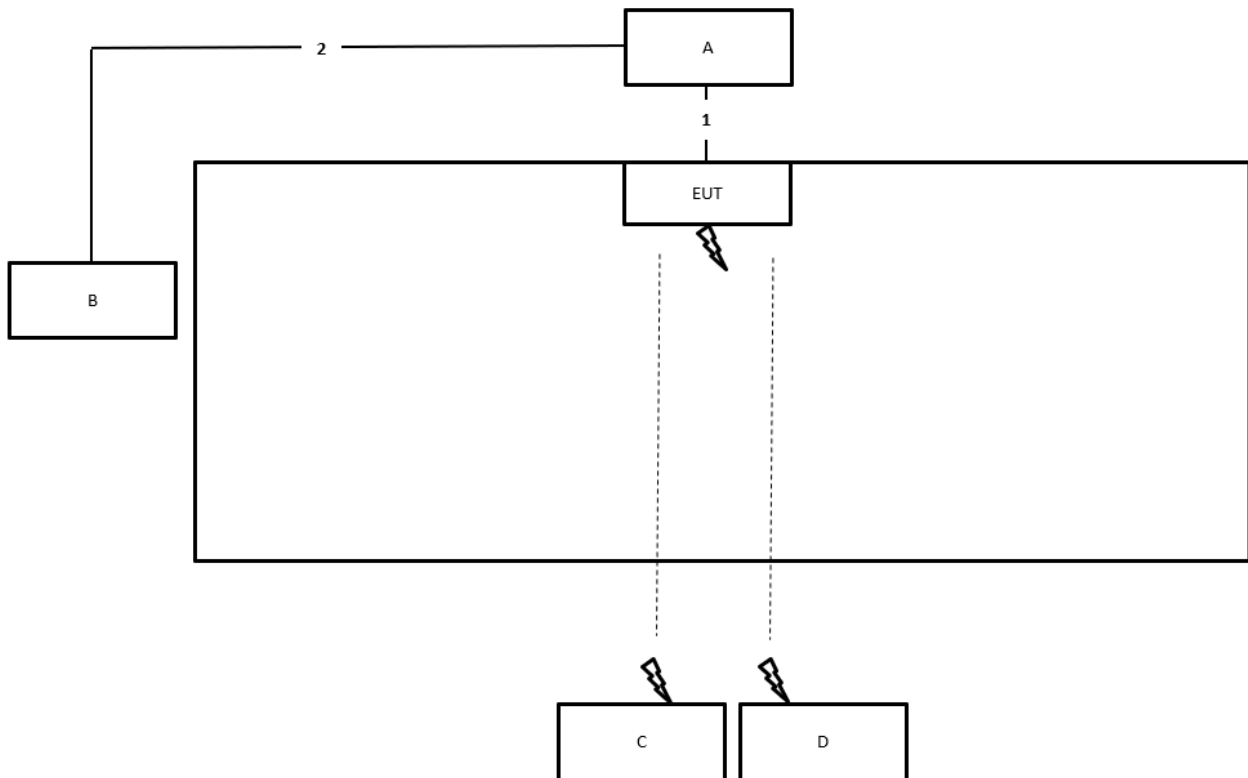Test Setup Diagram - Radiated Test > 1GHz (Co-location)


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

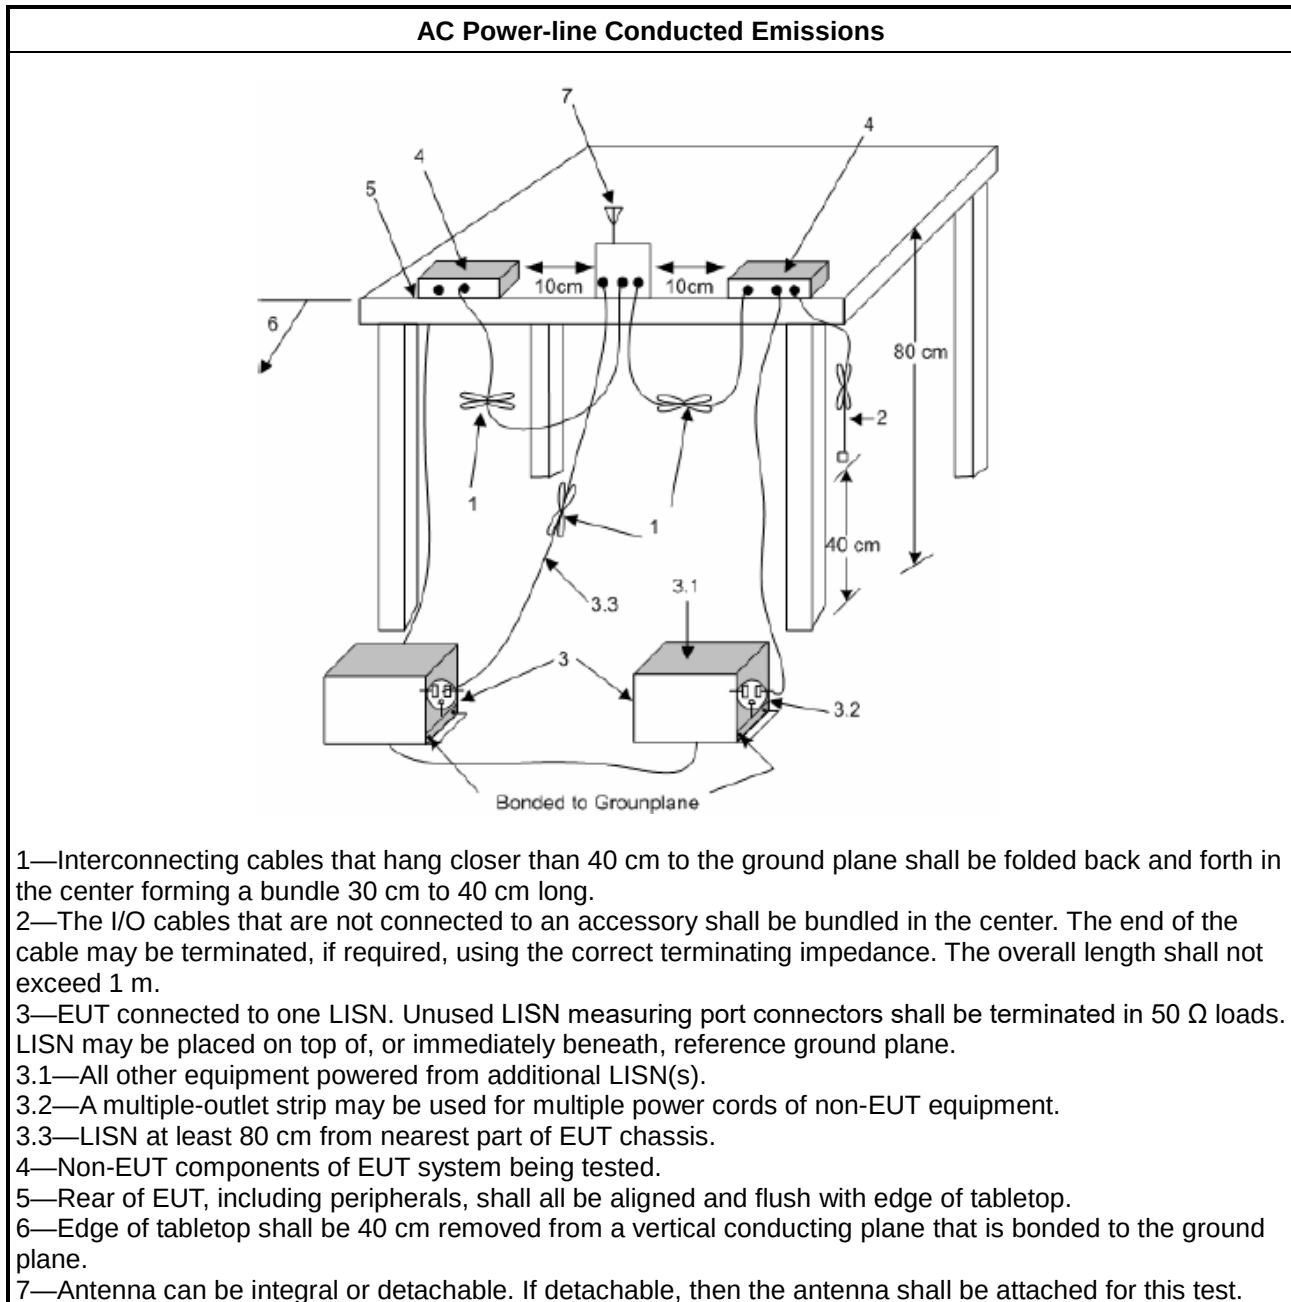

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> 6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

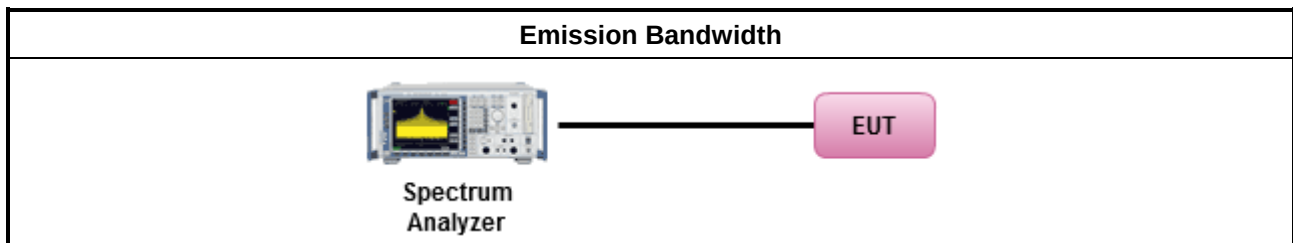

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
▪ Maximum Peak Conducted Output Power	
	☐ Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW $\geq$ EBW method).
	☐ Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
▪ Maximum Conducted Output Power	
	[duty cycle $\geq$ 98% or external video / power trigger]
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
	duty cycle < 98% and average over on/off periods with duty factor
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
	Measurement using a power meter (PM)
	☐ Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
	☒ Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).

▪ For conducted measurement.

- If the EUT supports multiple transmit chains using options given below:
Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
- If multiple transmit chains, EIRP calculation could be following as methods:

$$P_{total} = P_1 + P_2 + \dots + P_n$$
 (calculated in linear unit [mW] and transfer to log unit [dBm])

$$EIRP_{total} = P_{total} + DG$$

3.3.4 Test Setup

Maximum Conducted Output Power (Power Meter)



3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

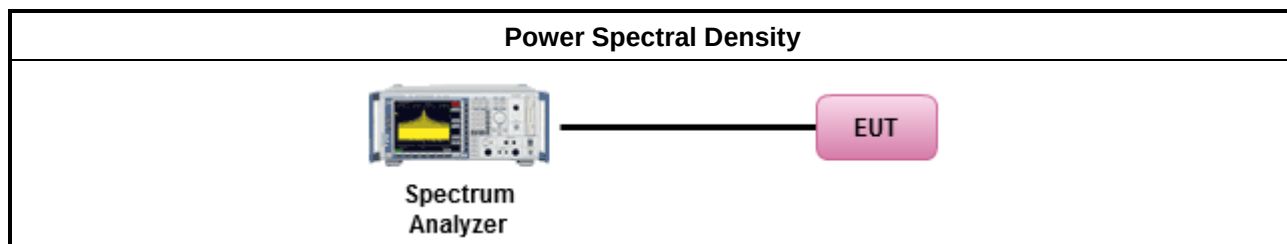

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
<p>Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.</p> <p>Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.</p>	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

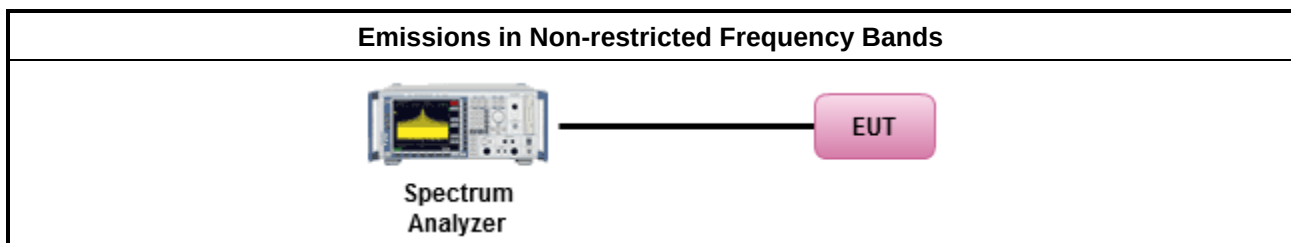

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.






3.6.3 Test Procedures

Test Method	
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

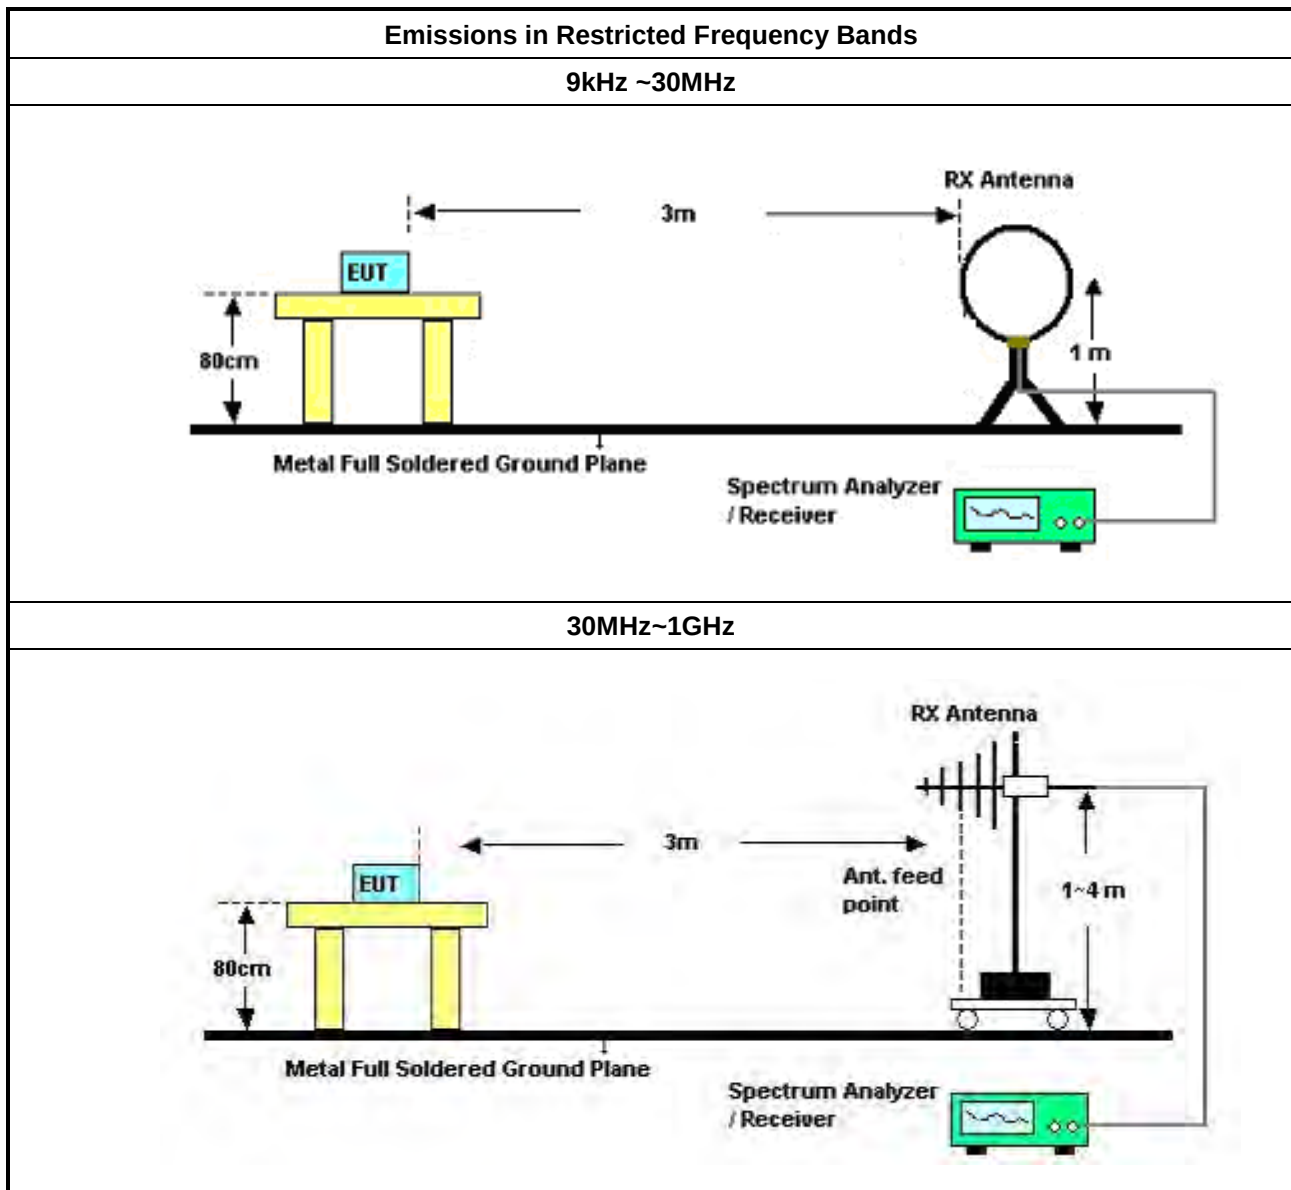

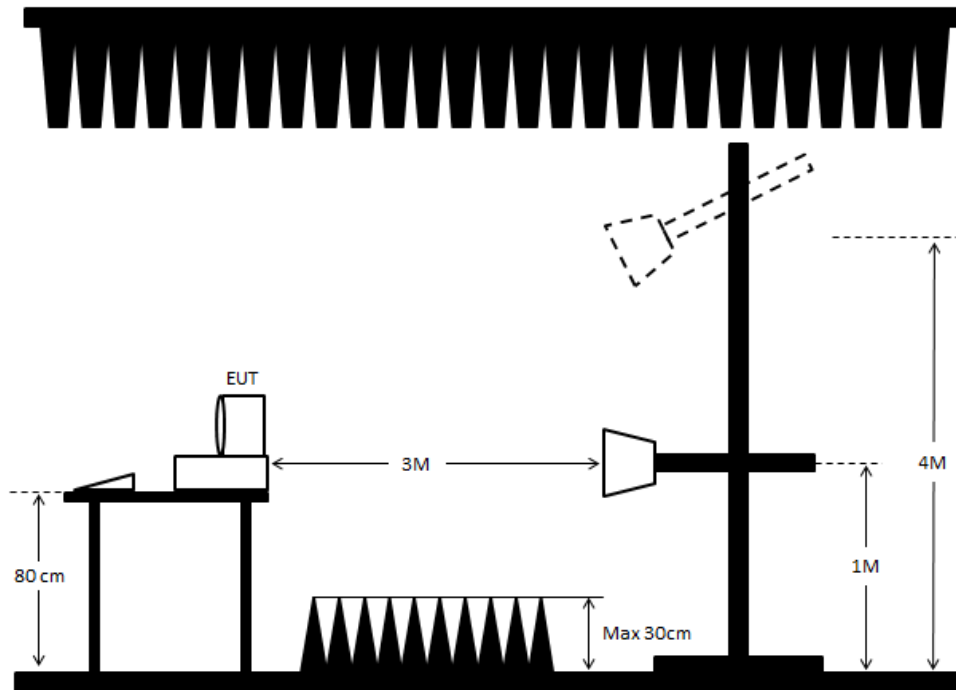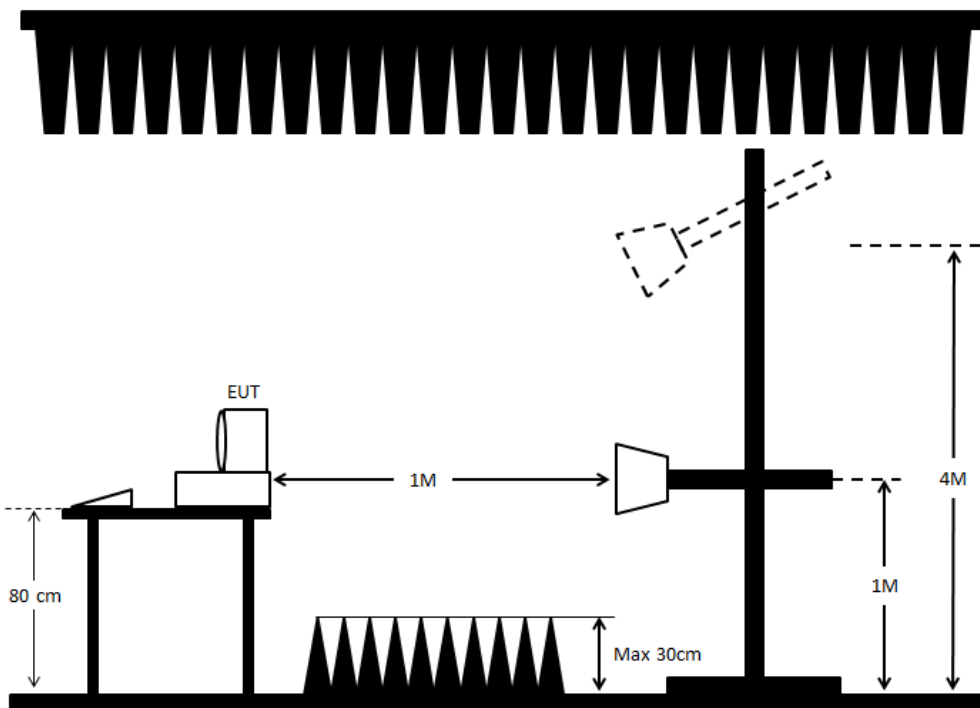Above 1GHz
Co-location
1,000~18,000 MHz

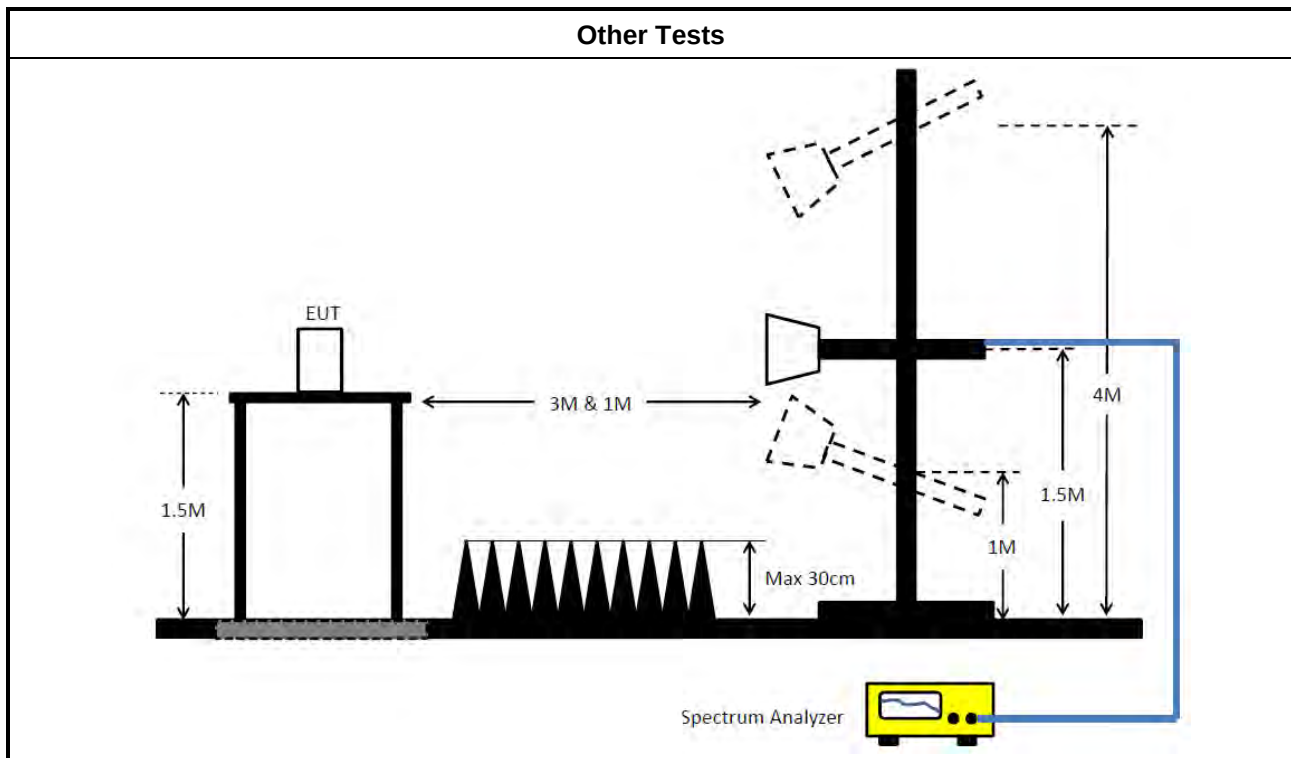18,000~40,000 MHz




3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 12, 2026	Mar. 11, 2027	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 04, 2026	Feb. 03, 2027	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 10, 2026	Apr. 09, 2027	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 14, 2026	Jan. 13, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 07, 2026	Mar. 06, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 07, 2026	Mar. 06, 2027	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESR7	103076	9 kHz ~ 7GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (10CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Sep. 03, 2025	Sep. 02, 2026	Radiation (10CH01-CB)
High Cable	TITAN	T318E	High cable01	30MHz ~ 18GHz	Nov. 14, 2025	Nov. 13, 2026	Radiation (10CH01-CB)
Bilog Ant & 6dB Attenuator	SCHWARZBECK & EMCI	VULB 9168 & N-6-06	1469 & AT-N06021	30MHz ~ 1GHz	Jan. 08, 2026	Jan. 07, 2027	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 15, 2025	Oct. 14, 2026	Radiation (10CH01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 13, 2026	Feb. 12, 2027	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120D-01816	1GHz~18GHz	Dec. 31, 2025	Dec. 30, 2026	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 13, 2026	Jan. 12, 2027	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH04-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	Jun. 10, 2025	Jun. 09, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-15247 _DTS	V5.11.27	2.4GHz- 2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 27, 2025	Sep. 26, 2026	Radiation (03CH05-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH05-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	Jun. 10, 2025	Jun. 09, 2026	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	May 08, 2026	May 07, 2027	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.10	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 14, 2026	Jan. 13, 2027	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 10	Pass	QP	150k	61.45	66.00	-4.55	Neutral

Mode 10

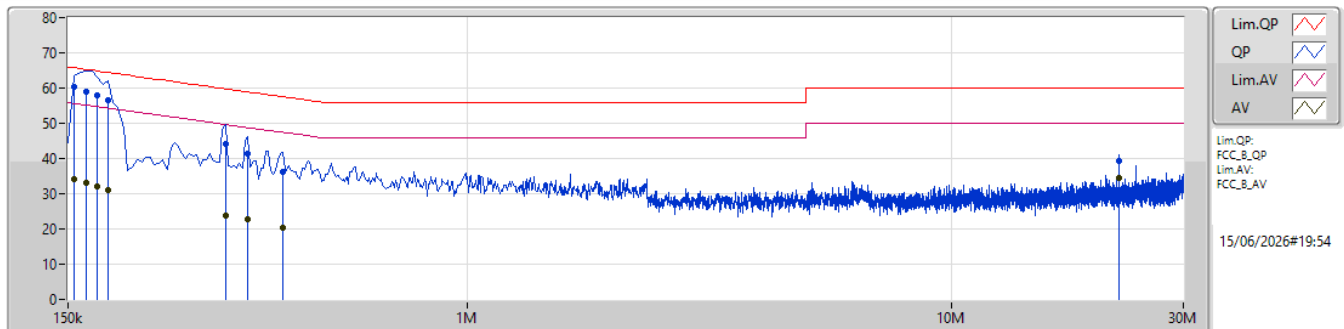

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	60.50	65.75	-5.25	10.03	Line	"Worst"	50.47	0.08	0.09	9.86						
AV	154.5k	34.03	55.75	-21.72	10.03	Line	-	24.00	0.08	0.09	9.86						
QP	163.5k	59.10	65.27	-6.17	10.01	Line	-	49.09	0.08	0.09	9.84						
AV	163.5k	33.01	55.27	-22.26	10.01	Line	-	23.00	0.08	0.09	9.84						
QP	172.5k	57.78	64.83	-7.05	9.98	Line	-	47.80	0.08	0.08	9.82						
AV	172.5k	32.04	54.83	-22.79	9.98	Line	-	22.06	0.08	0.08	9.82						
QP	181.5k	56.51	64.41	-7.90	9.95	Line	-	46.56	0.08	0.07	9.80						
AV	181.5k	31.08	54.41	-23.33	9.95	Line	-	21.13	0.08	0.07	9.80						
QP	316.5k	44.26	59.80	-15.54	10.03	Line	-	34.23	0.08	0.10	9.85						
AV	316.5k	23.92	49.80	-25.88	10.03	Line	-	13.89	0.08	0.10	9.85						
QP	352.5k	41.45	58.91	-17.46	10.06	Line	-	31.39	0.08	0.11	9.87						
AV	352.5k	22.60	48.91	-26.31	10.06	Line	-	12.54	0.08	0.11	9.87						
QP	415.5k	36.06	57.53	-21.47	10.10	Line	-	25.96	0.08	0.12	9.90						
AV	415.5k	20.51	47.53	-27.02	10.10	Line	-	10.41	0.08	0.12	9.90						
QP	22.119M	39.39	60.00	-20.61	11.02	Line	-	28.37	0.30	0.38	10.34						
AV	22.119M	34.38	50.00	-15.62	11.02	Line	-	23.36	0.30	0.38	10.34						

Mode 10

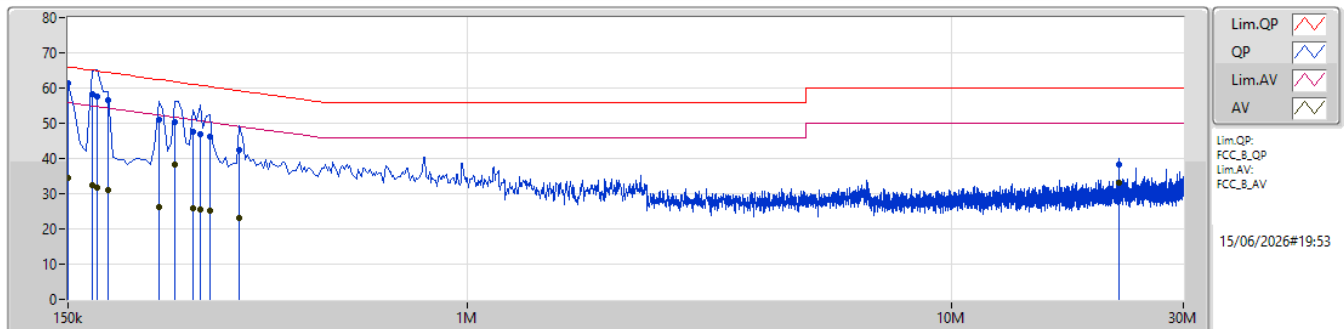

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	61.45	66.00	-4.55	10.04	Neutral	"Worst"	51.41	0.06	0.10	9.88						
AV	150k	34.53	56.00	-21.47	10.04	Neutral	-	24.49	0.06	0.10	9.88						
QP	168k	58.44	65.06	-6.62	9.97	Neutral	-	48.47	0.06	0.08	9.83						
AV	168k	32.45	55.06	-22.61	9.97	Neutral	-	22.48	0.06	0.08	9.83						
QP	172.5k	57.59	64.83	-7.24	9.96	Neutral	-	47.63	0.06	0.08	9.82						
AV	172.5k	31.86	54.83	-22.97	9.96	Neutral	-	21.90	0.06	0.08	9.82						
QP	181.5k	56.60	64.41	-7.81	9.93	Neutral	-	46.67	0.06	0.07	9.80						
AV	181.5k	31.02	54.41	-23.39	9.93	Neutral	-	21.09	0.06	0.07	9.80						
QP	231k	51.14	62.41	-11.27	9.92	Neutral	-	41.22	0.06	0.07	9.79						
AV	231k	26.30	52.41	-26.11	9.92	Neutral	-	16.38	0.06	0.07	9.79						
QP	249k	50.33	61.79	-11.46	9.94	Neutral	-	40.39	0.06	0.08	9.80						
AV	249k	38.30	51.79	-13.49	9.94	Neutral	-	28.36	0.06	0.08	9.80						
QP	271.5k	47.75	61.07	-13.32	9.97	Neutral	-	37.78	0.06	0.09	9.82						
AV	271.5k	25.88	51.07	-25.19	9.97	Neutral	-	15.91	0.06	0.09	9.82						
QP	280.5k	47.03	60.80	-13.77	9.98	Neutral	-	37.05	0.06	0.09	9.83						
AV	280.5k	25.44	50.80	-25.36	9.98	Neutral	-	15.46	0.06	0.09	9.83						
QP	294k	46.06	60.42	-14.36	9.99	Neutral	-	36.07	0.06	0.09	9.84						
AV	294k	25.03	50.42	-25.39	9.99	Neutral	-	15.04	0.06	0.09	9.84						
QP	339k	42.39	59.23	-16.84	10.04	Neutral	-	32.35	0.06	0.11	9.87						
AV	339k	23.06	49.23	-26.17	10.04	Neutral	-	13.02	0.06	0.11	9.87						
QP	22.119M	38.26	60.00	-21.74	11.00	Neutral	-	27.26	0.28	0.38	10.34						
AV	22.119M	33.02	50.00	-16.98	11.00	Neutral	-	22.02	0.28	0.38	10.34						

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	8.025M	13.224M	13M2G1D	7.075M	12.667M
802.11g_Nss1,(6Mbps)_2TX	16.35M	16.836M	16M8D1D	16.3M	16.769M
802.11ax HEW20_Nss1,(MCS0)_2TX	19.05M	19.08M	19M1D1D	18.95M	19.032M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	7.075M	12.667M	8.025M	12.773M
2437MHz	Pass	500k	7.55M	13.102M	7.55M	12.858M
2462MHz	Pass	500k	7.575M	13.13M	7.975M	13.224M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.325M	16.769M	16.325M	16.793M
2437MHz	Pass	500k	16.35M	16.781M	16.325M	16.836M
2462MHz	Pass	500k	16.3M	16.785M	16.325M	16.79M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	18.95M	19.032M	19.025M	19.062M
2437MHz	Pass	500k	18.975M	19.033M	19M	19.08M
2462MHz	Pass	500k	19M	19.044M	19.05M	19.055M



Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

EBW

2412MHz

31/03/2026

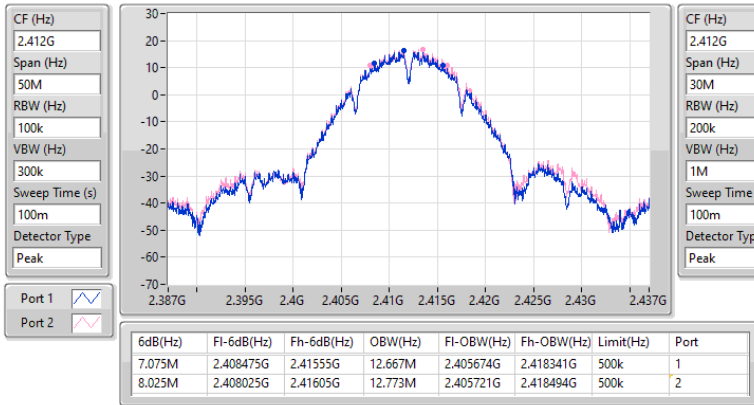
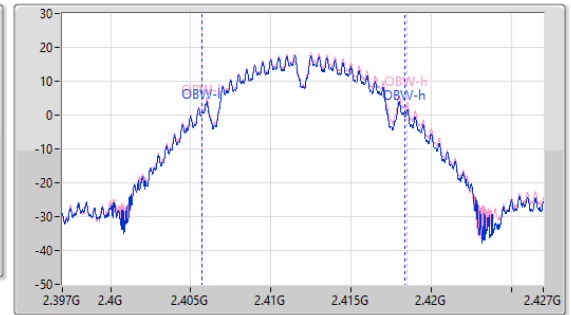


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

EBW

2437MHz

31/03/2026

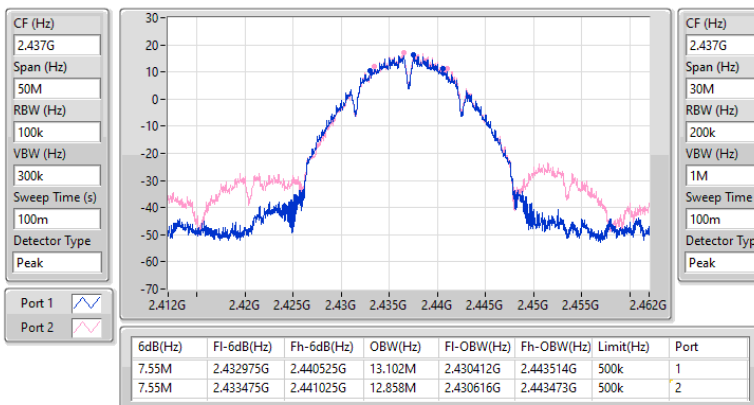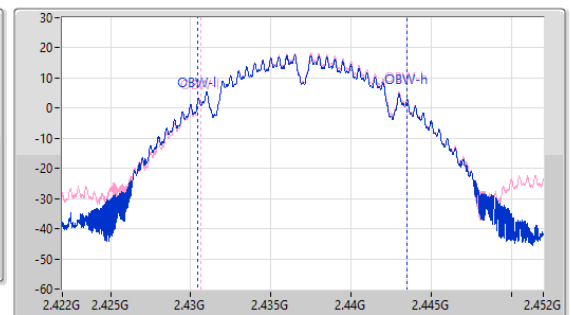


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

EBW

2462MHz

31/03/2026

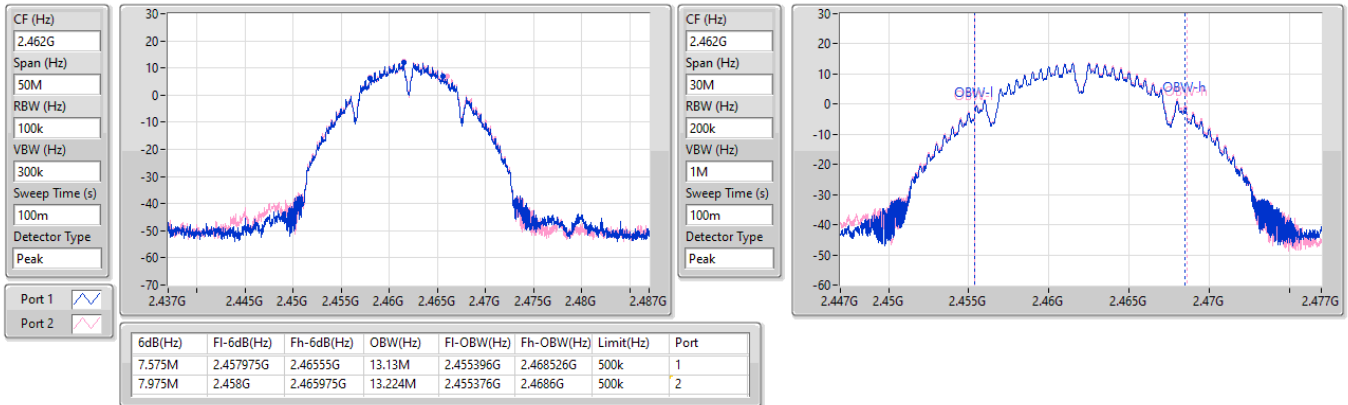


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

EBW

2412MHz

31/03/2026

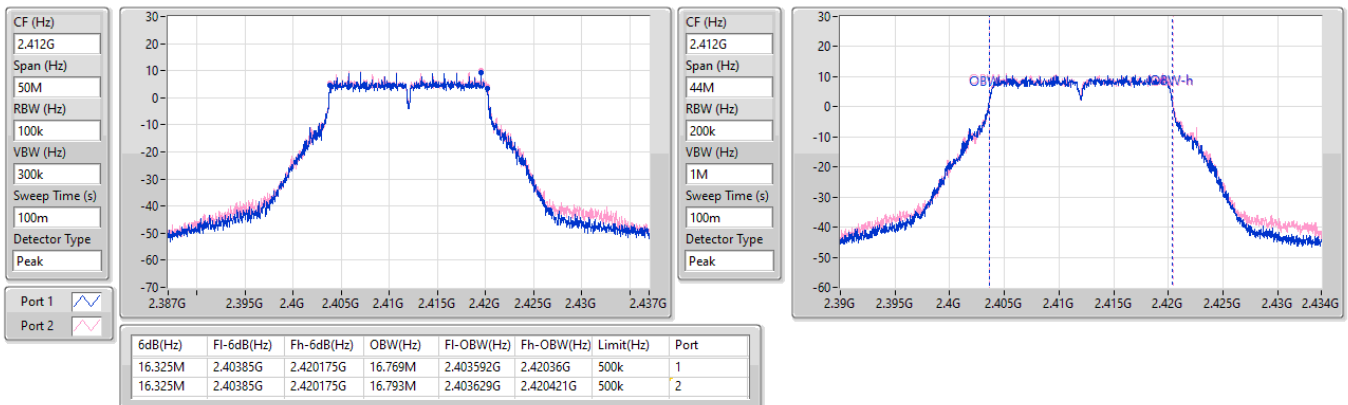


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

EBW

2437MHz

31/03/2026

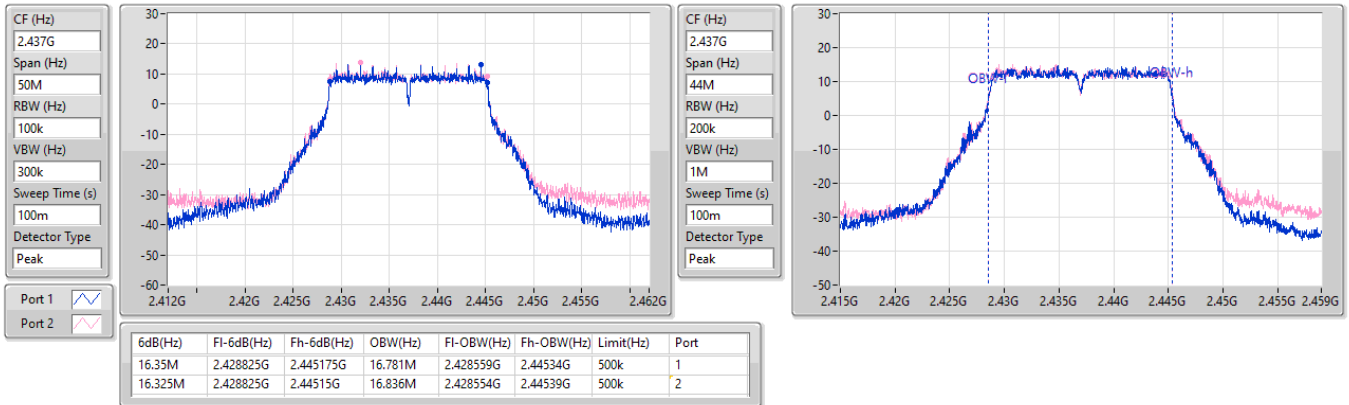


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

EBW

2462MHz

31/03/2026


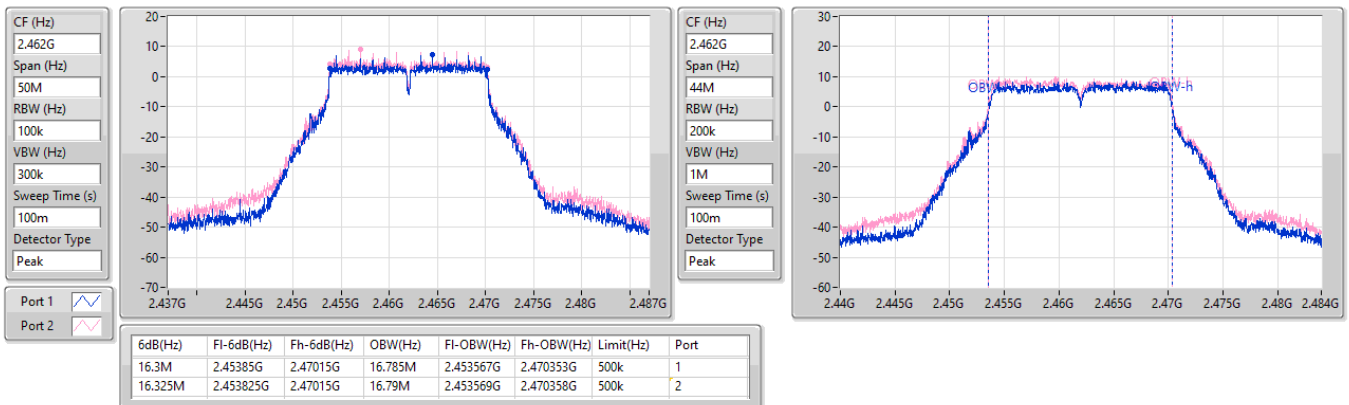


2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

2412MHz

31/03/2026

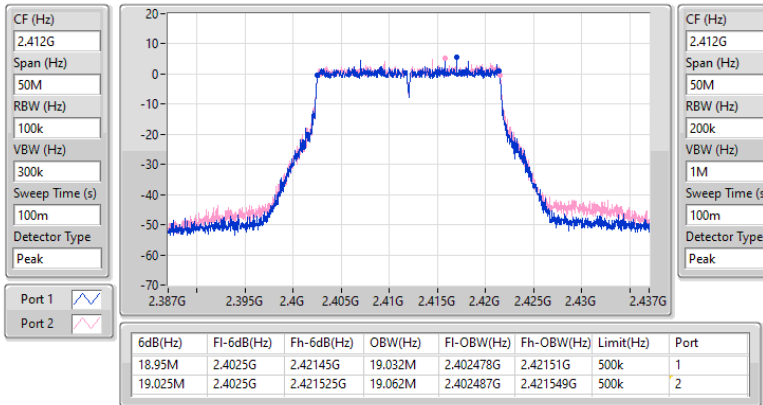
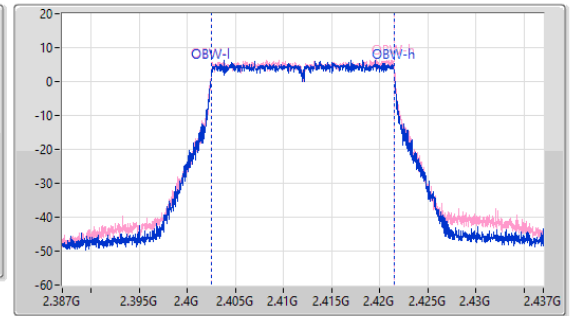


2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

2437MHz

31/03/2026

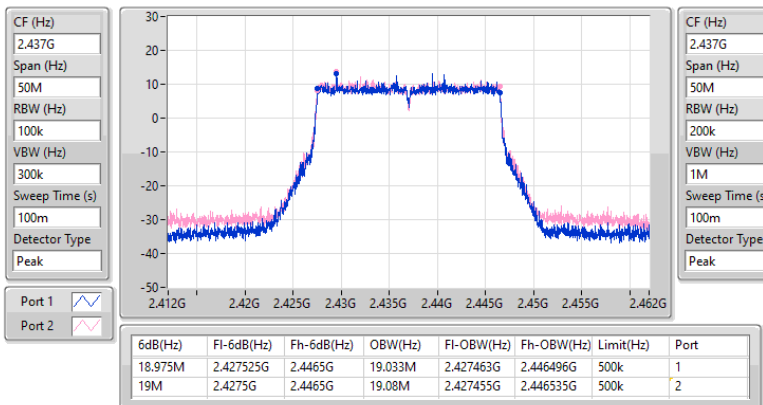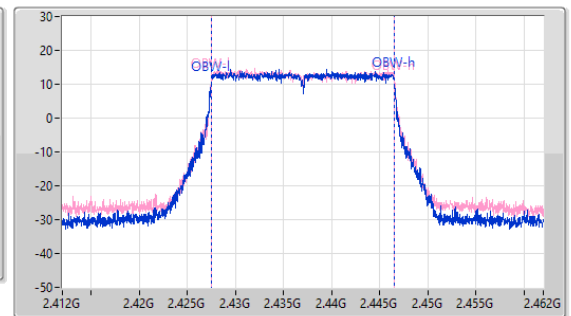


2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

2462MHz

31/03/2026

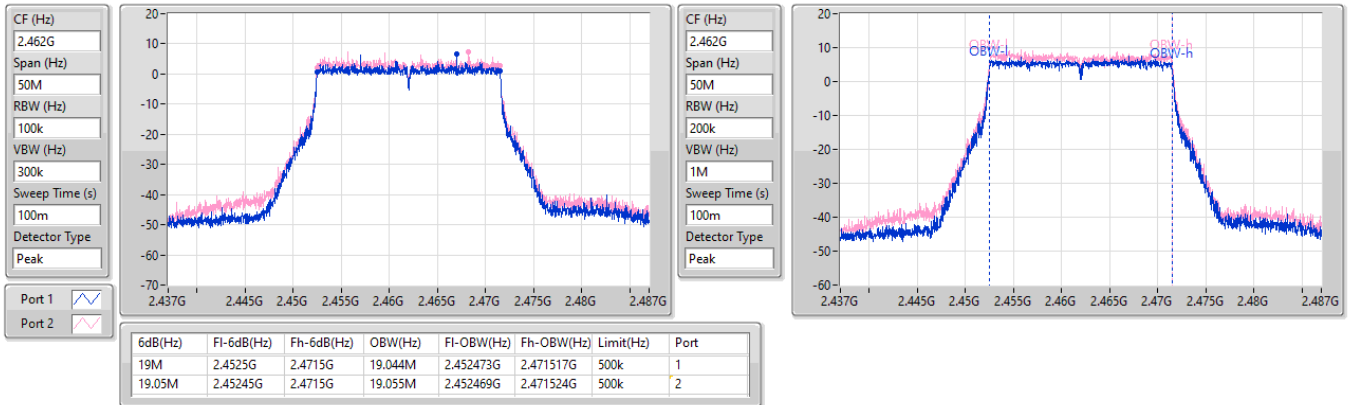

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	7.975M	13.133M	13M1G1D	7.275M	13.028M
802.11b_Nss1,(1Mbps)_2TX	8.025M	13.328M	13M3G1D	7.3M	12.999M
802.11b_Nss1,(1Mbps)_4TX	8.55M	13.388M	13M4G1D	5.875M	13.088M
802.11g_Nss1,(6Mbps)_1TX	16.325M	16.712M	16M7D1D	16.325M	16.668M
802.11g_Nss1,(6Mbps)_2TX	16.475M	16.778M	16M8D1D	15.725M	16.646M
802.11g_Nss1,(6Mbps)_4TX	16.45M	16.756M	16M8D1D	16.325M	16.646M
802.11be EHT20_Nss1,(MCS0)_1TX	19.05M	19.04M	19M0D1D	18.8M	19.04M
802.11be EHT20_Nss1,(MCS0)_2TX	19.1M	19.04M	19M0D1D	18.875M	19.015M
802.11be EHT20_Nss1,(MCS0)_4TX	19.125M	19.065M	19M1D1D	18.825M	18.966M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	7.975M	13.028M						
2437MHz	Pass	500k	7.275M	13.088M						
2462MHz	Pass	500k	7.525M	13.133M						
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	16.325M	16.668M						
2437MHz	Pass	500k	16.325M	16.69M						
2462MHz	Pass	500k	16.325M	16.712M						
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	18.8M	19.04M						
2437MHz	Pass	500k	19.05M	19.04M						
2462MHz	Pass	500k	19.025M	19.04M						
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	7.8M	13.013M	8.025M	13.088M				
2437MHz	Pass	500k	7.55M	13.028M	7.3M	12.999M				
2462MHz	Pass	500k	7.3M	13.148M	7.3M	13.328M				
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	16.35M	16.646M	16.325M	16.646M				
2437MHz	Pass	500k	16.475M	16.734M	15.725M	16.712M				
2462MHz	Pass	500k	16.35M	16.69M	16.325M	16.778M				
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	18.875M	19.04M	19.1M	19.015M				
2437MHz	Pass	500k	18.975M	19.04M	18.975M	19.015M				
2462MHz	Pass	500k	19.1M	19.015M	19.05M	19.04M				
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	7.075M	13.133M	8.55M	13.088M	7.075M	13.148M	7.4M	13.118M
2437MHz	Pass	500k	8.05M	13.193M	7.525M	13.178M	5.875M	13.388M	7.575M	13.148M
2462MHz	Pass	500k	7.8M	13.223M	7.525M	13.178M	7.475M	13.328M	7.75M	13.088M
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	16.325M	16.69M	16.35M	16.69M	16.35M	16.734M	16.375M	16.668M
2437MHz	Pass	500k	16.325M	16.712M	16.35M	16.646M	16.325M	16.756M	16.45M	16.734M
2462MHz	Pass	500k	16.425M	16.69M	16.325M	16.69M	16.35M	16.756M	16.325M	16.712M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	19.05M	19.015M	19.075M	18.966M	18.825M	19.04M	18.9M	19.015M
2437MHz	Pass	500k	19.1M	19.015M	19.1M	19.04M	19.125M	19.04M	19.025M	19.015M
2462MHz	Pass	500k	19.025M	19.04M	19.1M	19.04M	19.125M	19.065M	19.125M	18.991M


Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

EBW

2412MHz

28/03/2026

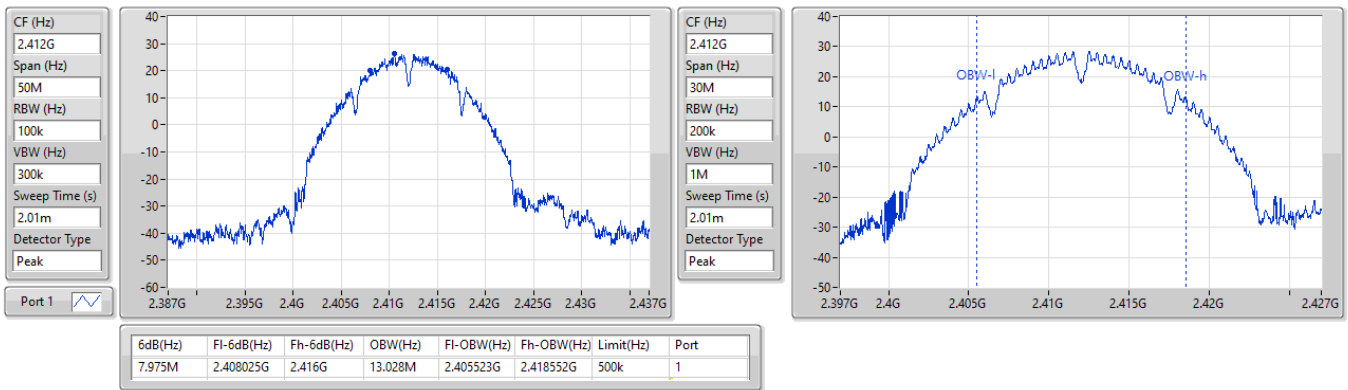


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

EBW

2437MHz

28/03/2026


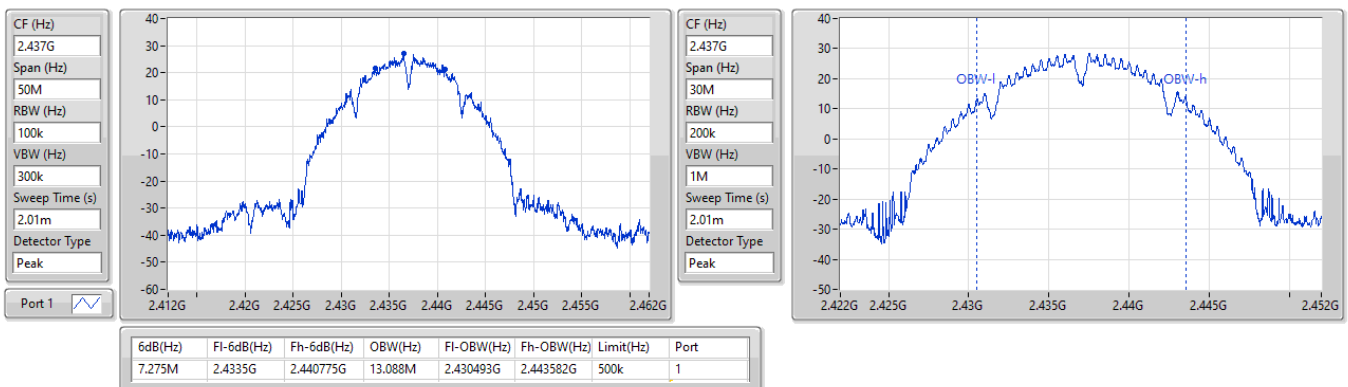


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

EBW

2462MHz

28/03/2026

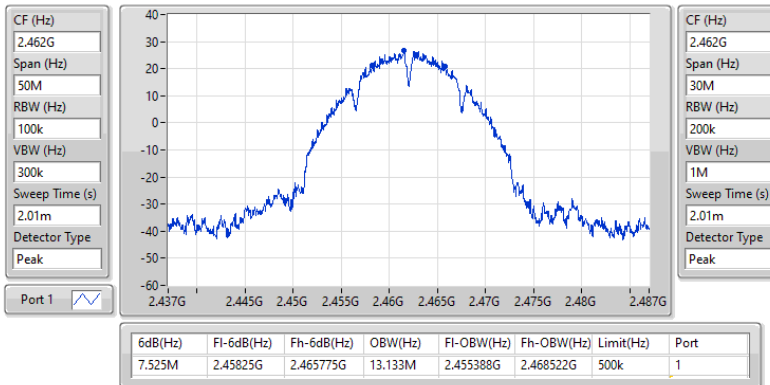
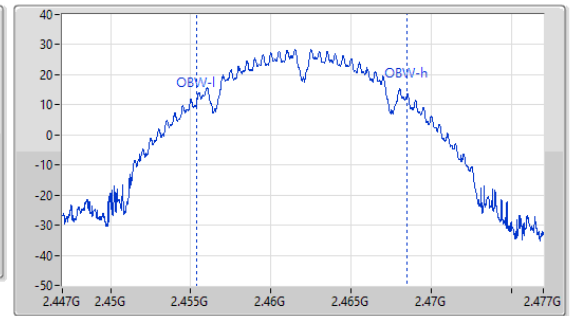


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW

2412MHz

28/03/2026

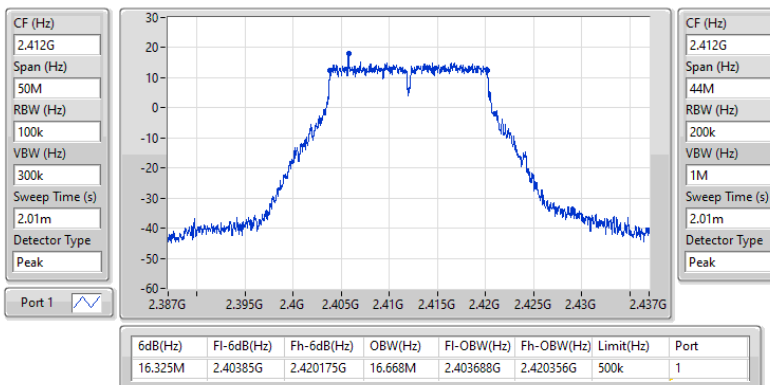
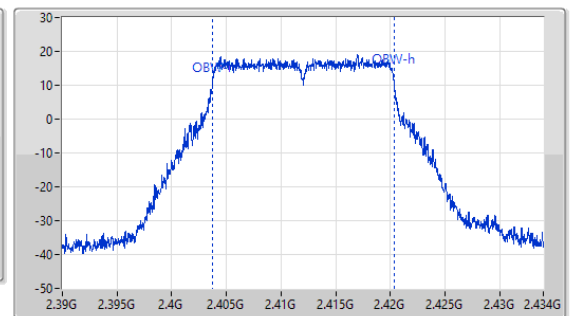


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW

2437MHz

28/03/2026

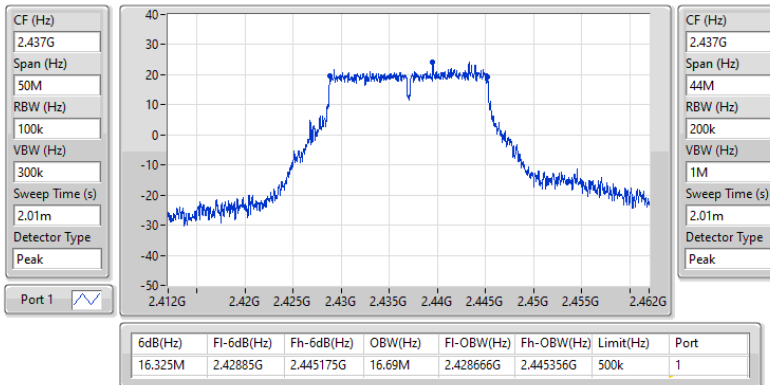
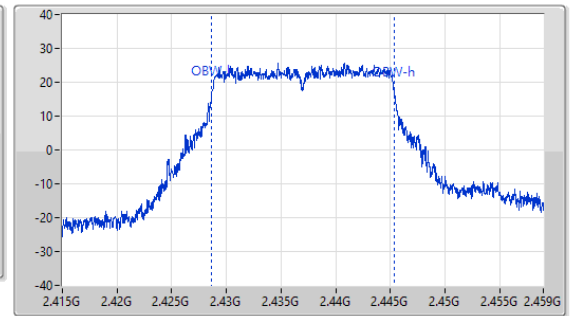


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

EBW


2462MHz

28/03/2026

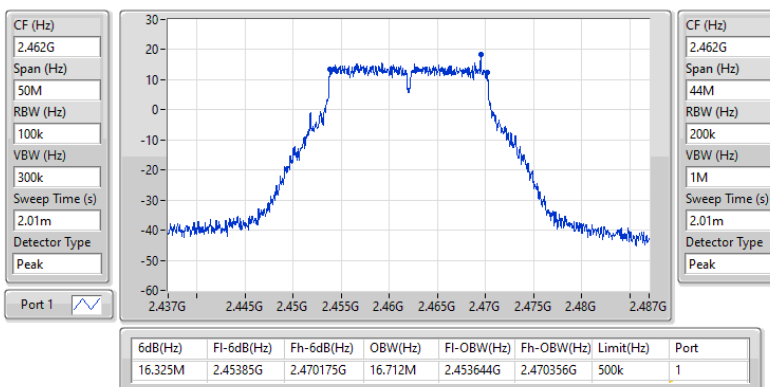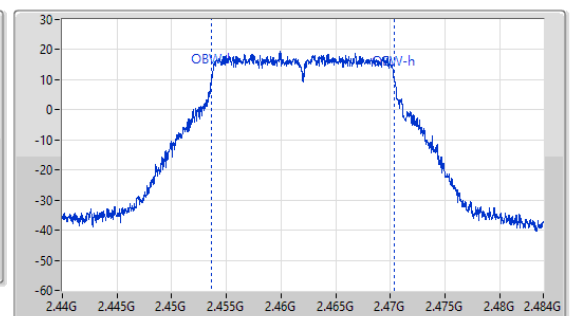


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
2412MHz

28/03/2026


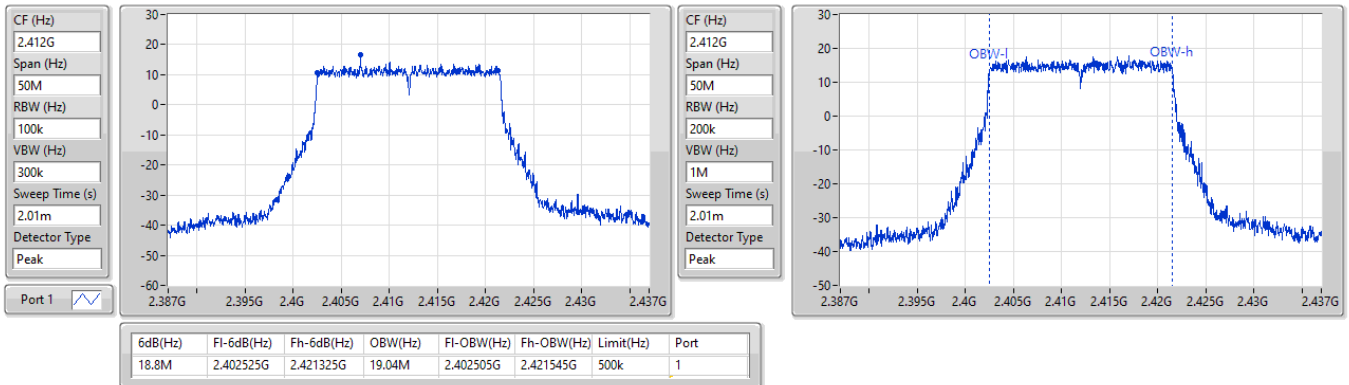

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
2437MHz

28/03/2026


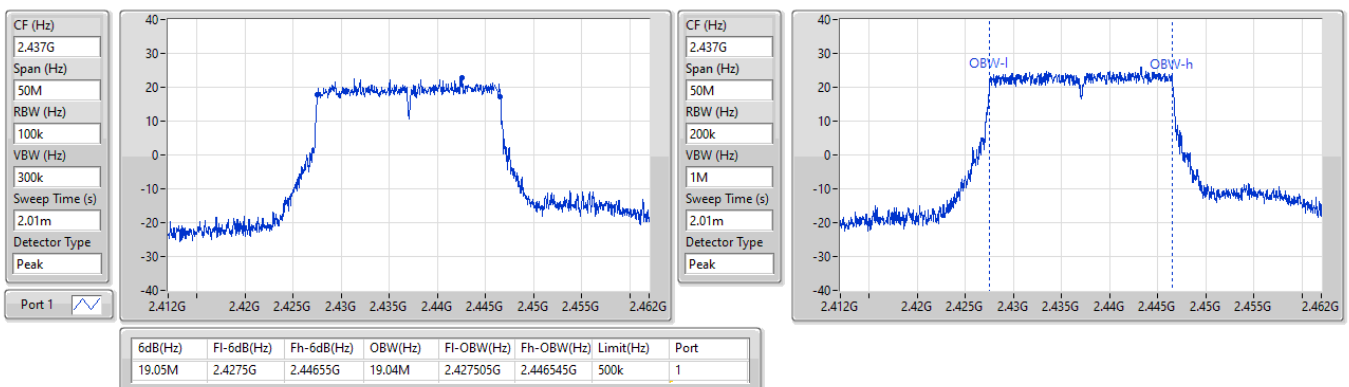


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
2462MHz

28/03/2026

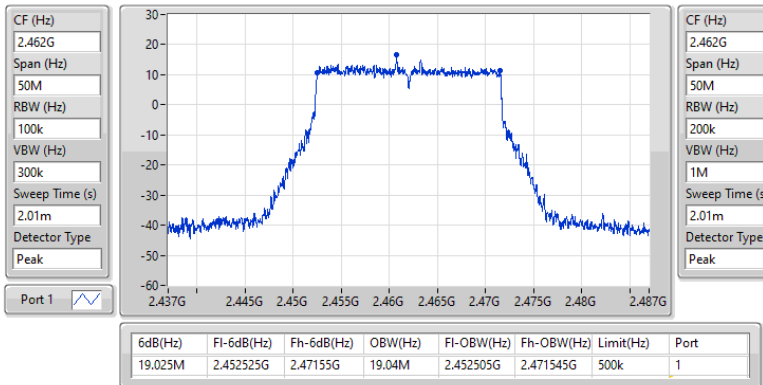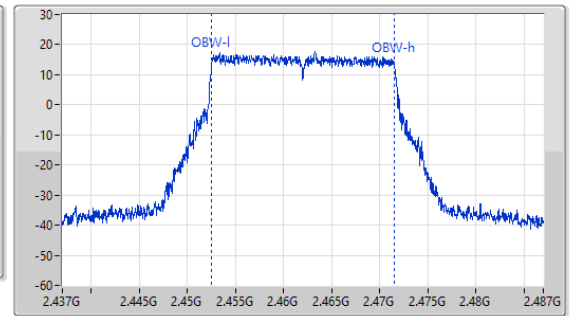
2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX
EBW
2412MHz

28/03/2026

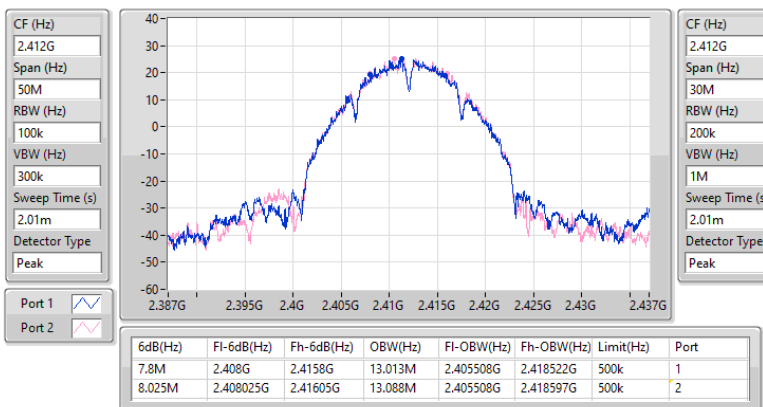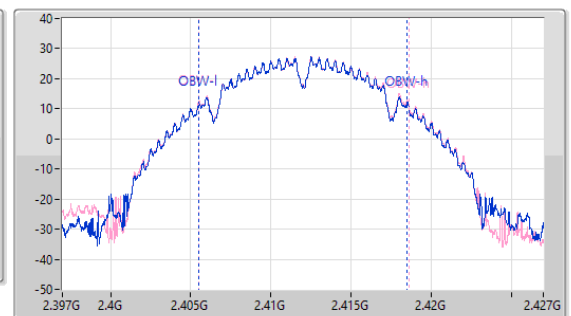


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

EBW

2437MHz

28/03/2026

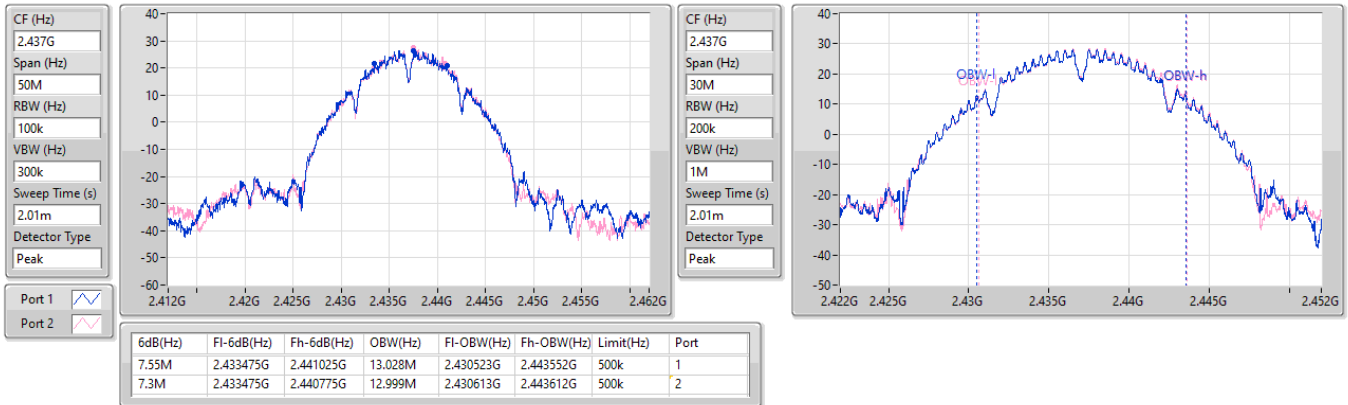


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

EBW

2462MHz

28/03/2026

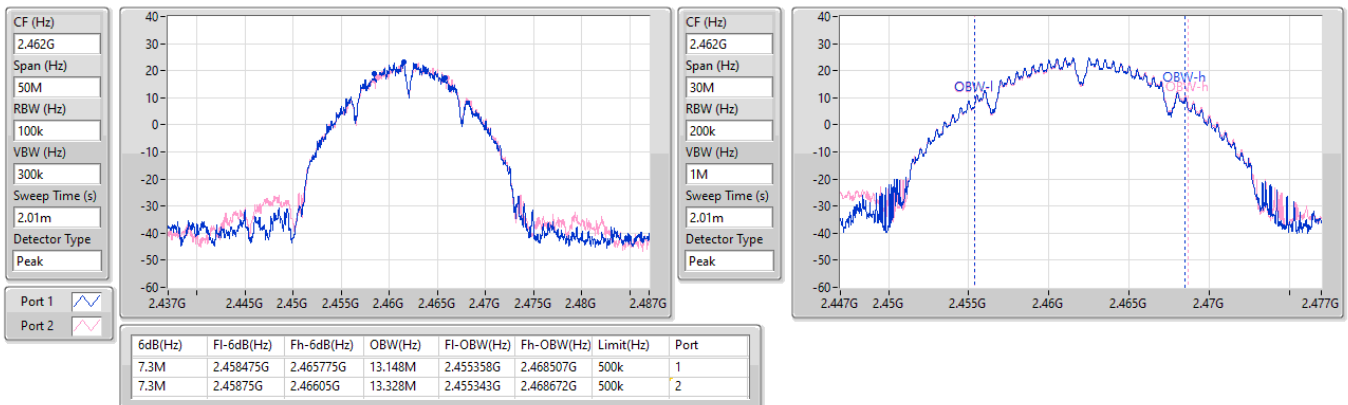


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

EBW

2412MHz

28/03/2026

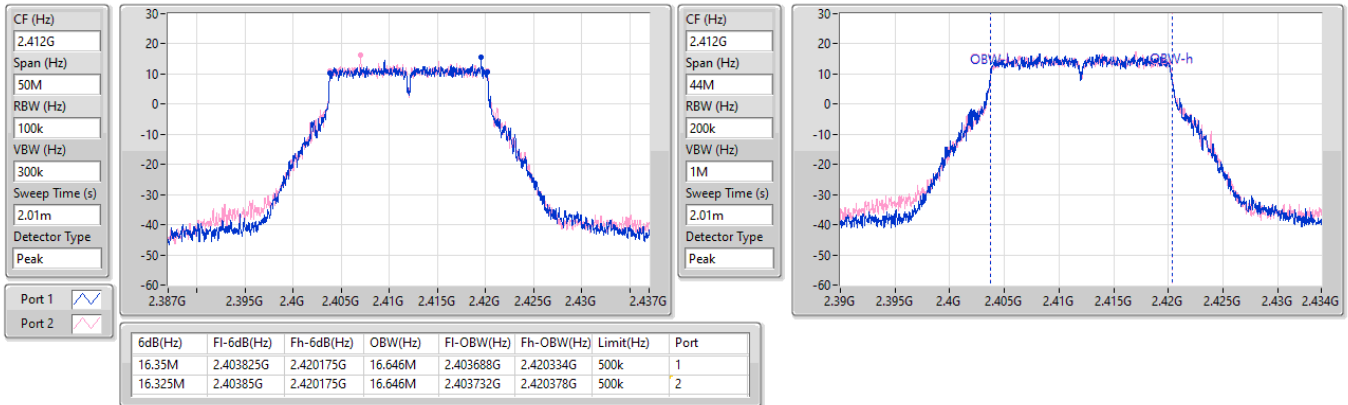


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

EBW

2437MHz

28/03/2026

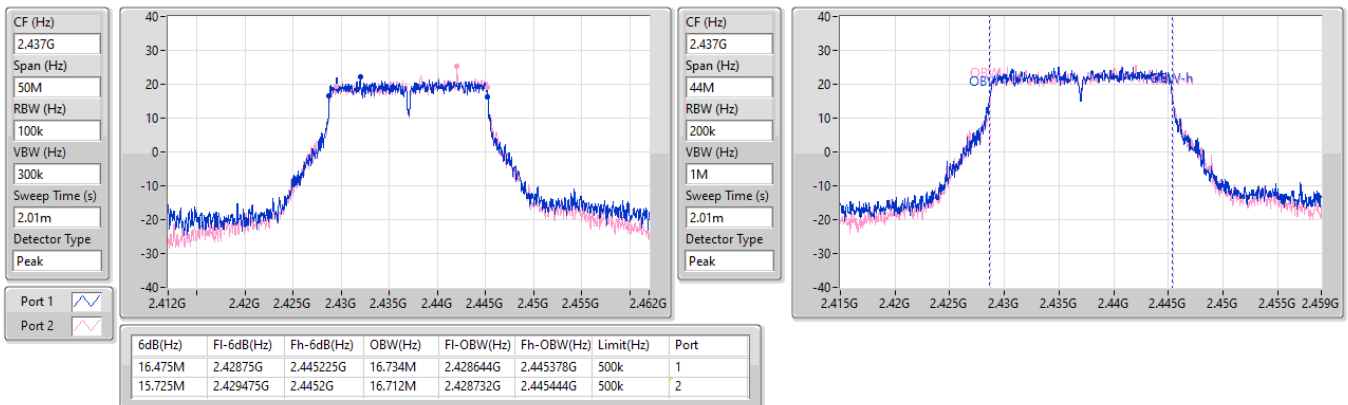


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

EBW

2462MHz

28/03/2026

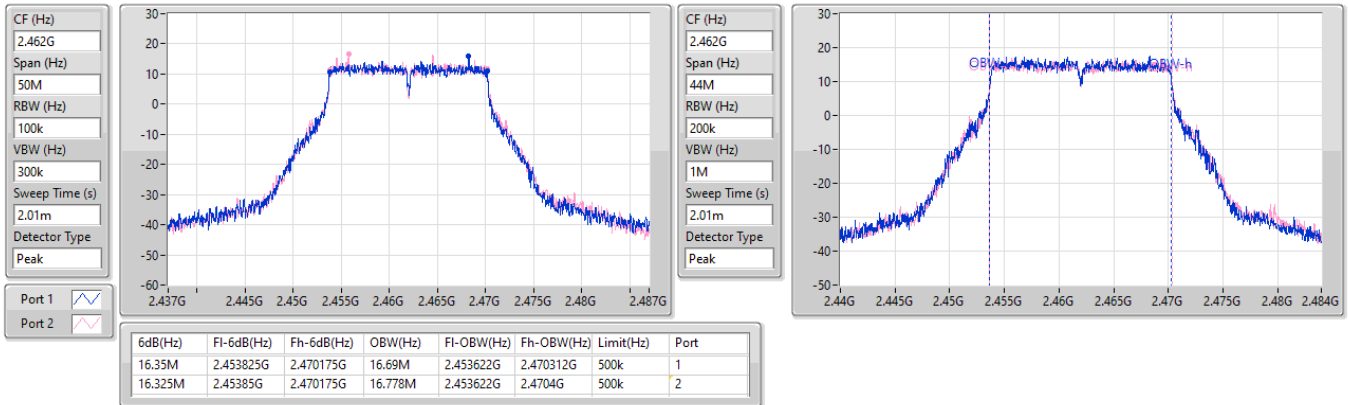


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

2412MHz

28/03/2026

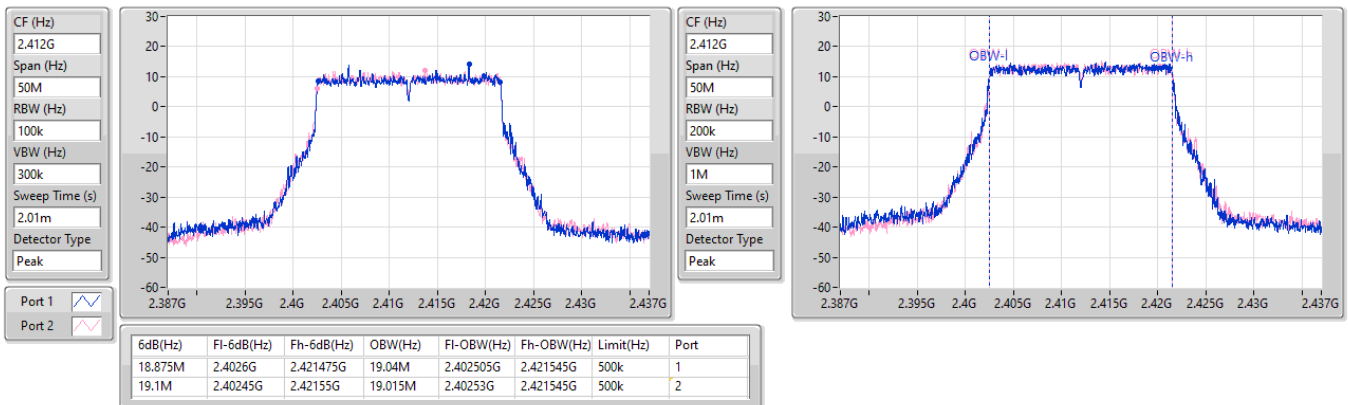


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

2437MHz

28/03/2026

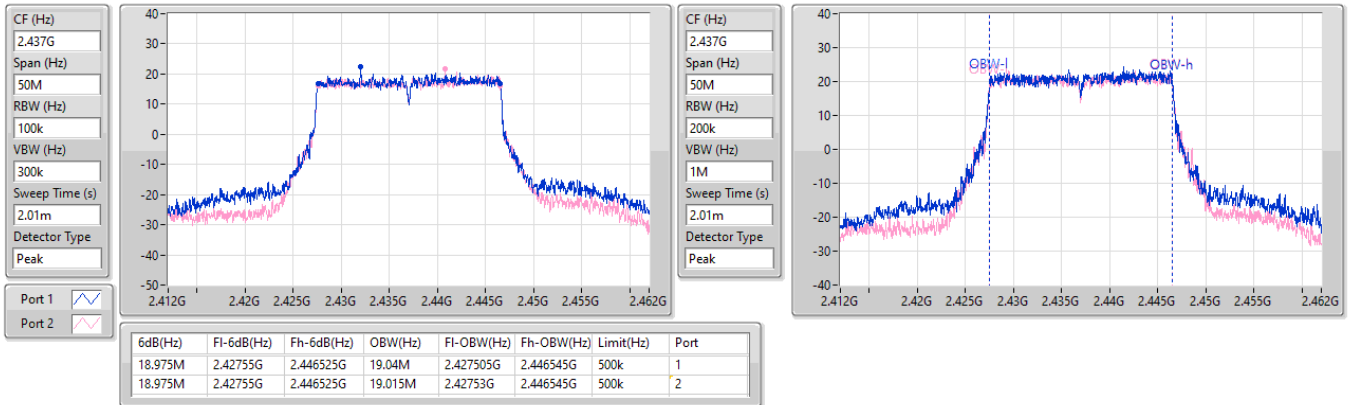


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

2462MHz

28/03/2026

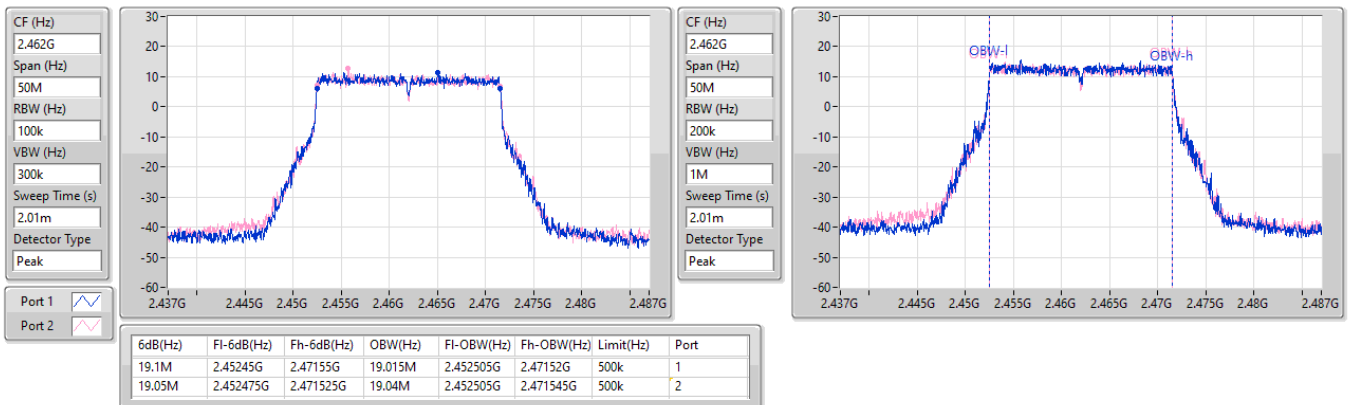


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW

2412MHz

28/03/2026

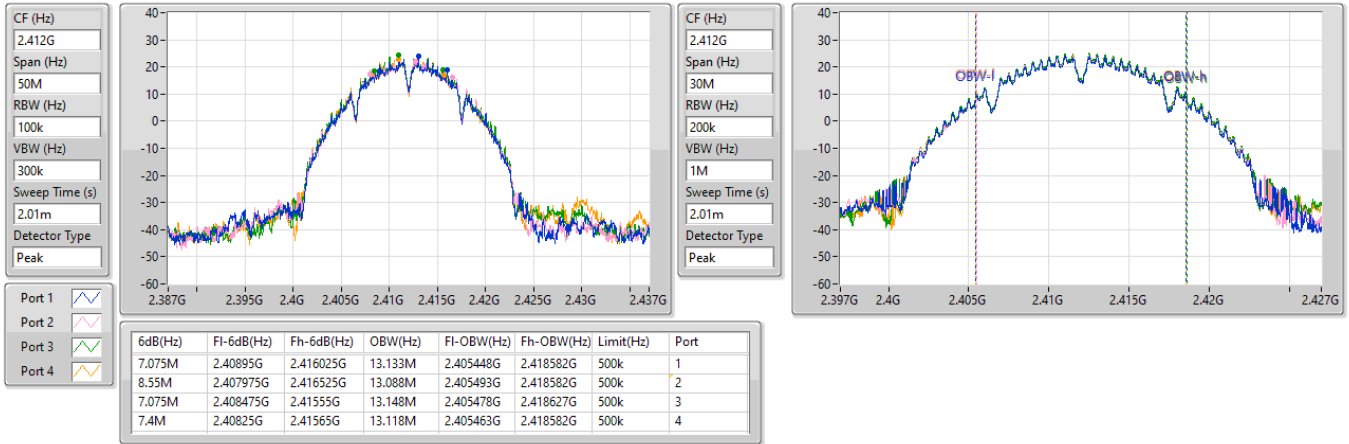


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW

2437MHz

28/03/2026


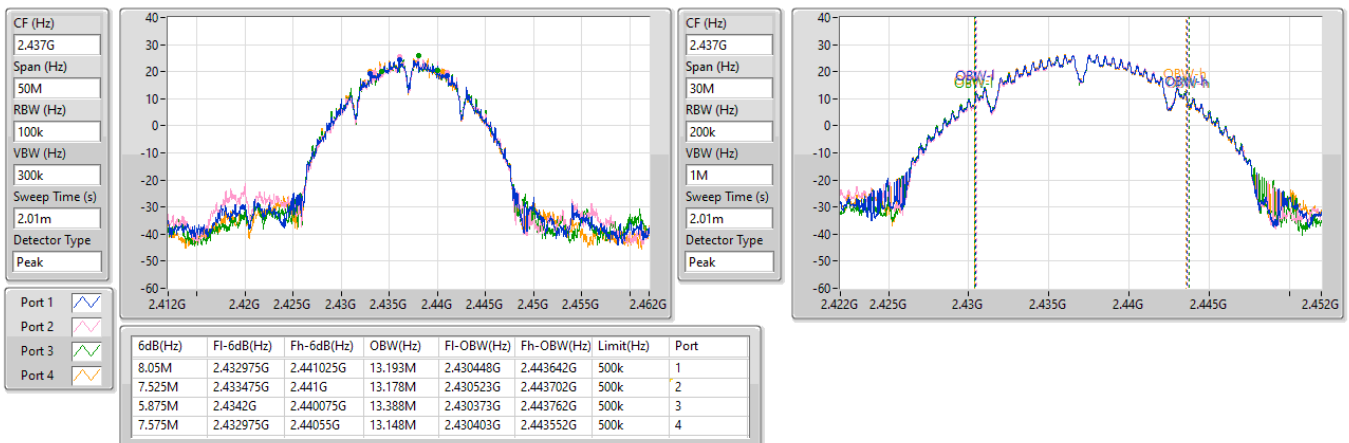


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW

2462MHz

28/03/2026

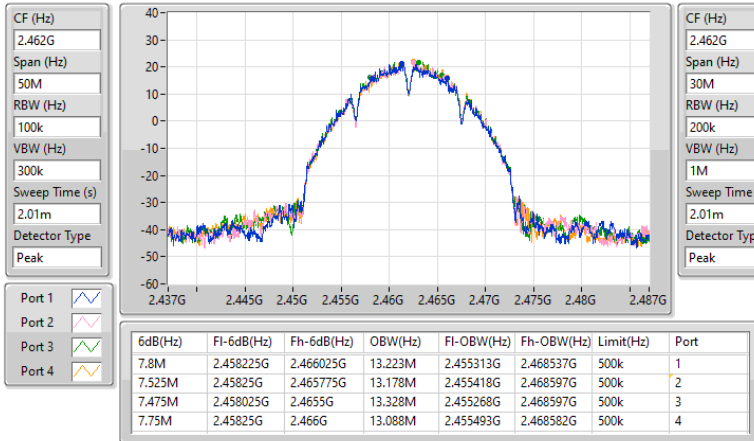
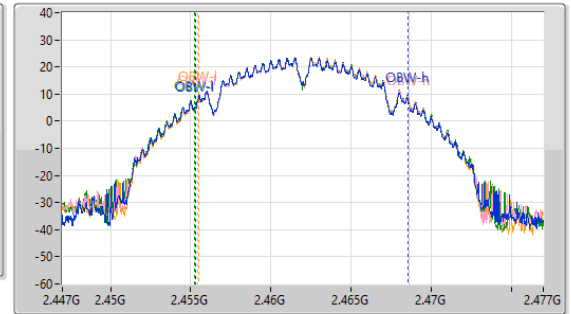


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

EBW

2412MHz

28/03/2026

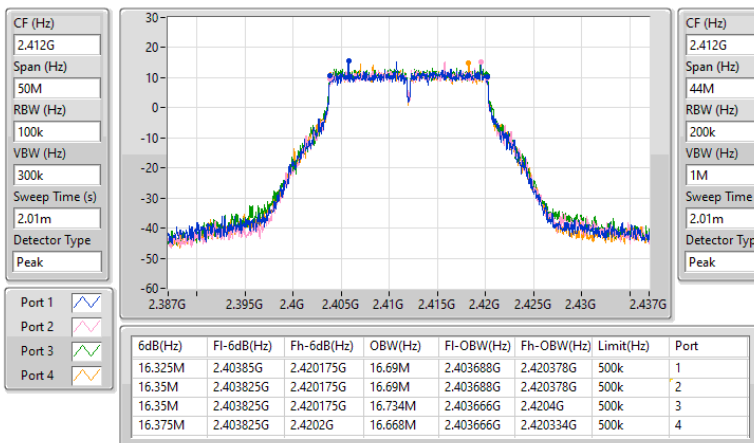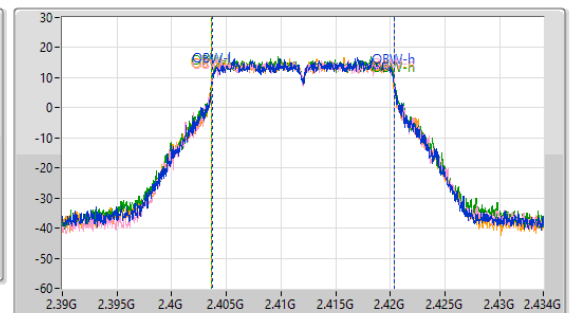


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

EBW

2437MHz

28/03/2026

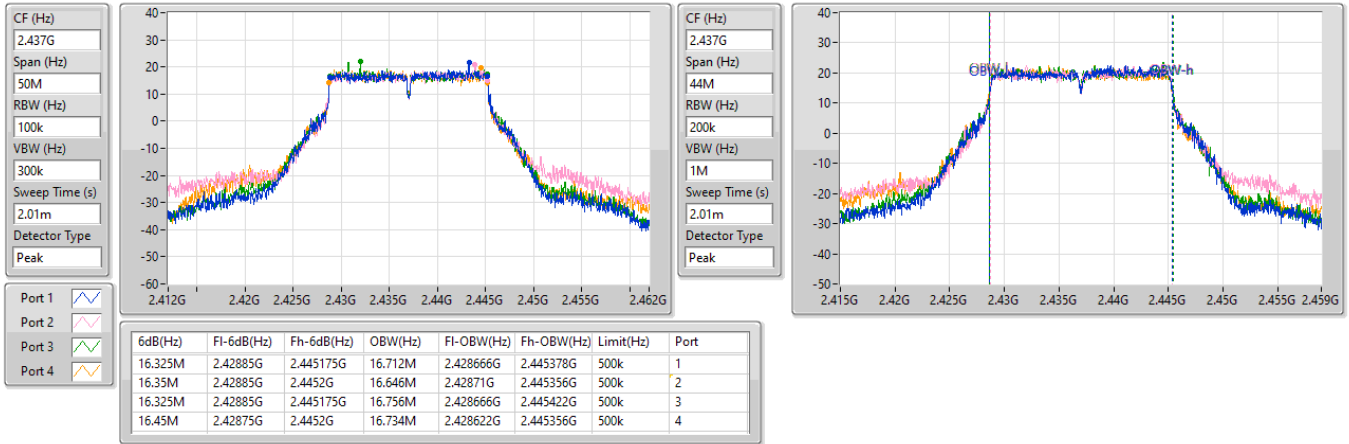


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

EBW

2462MHz

28/03/2026

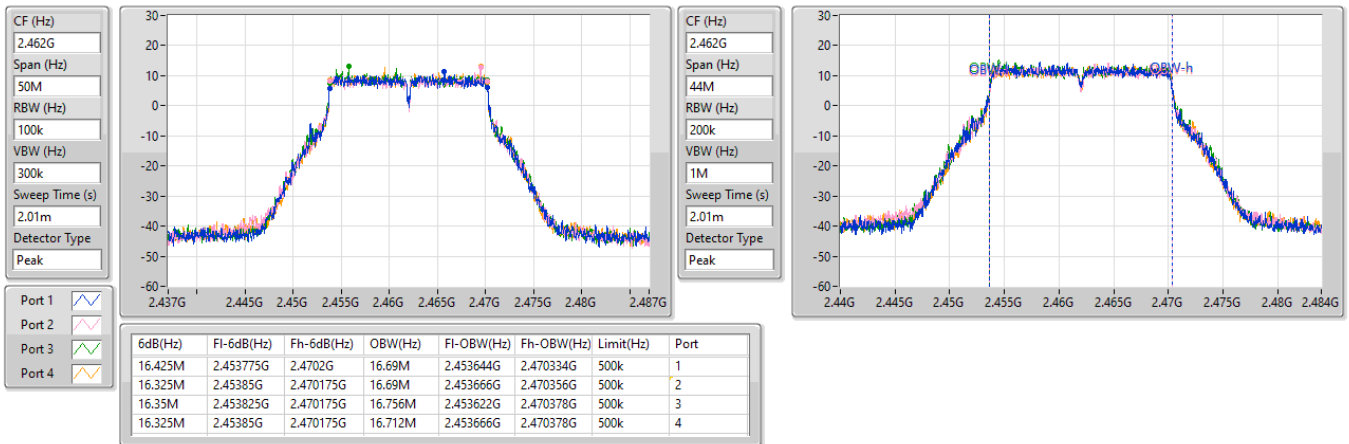


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

2412MHz

28/03/2026

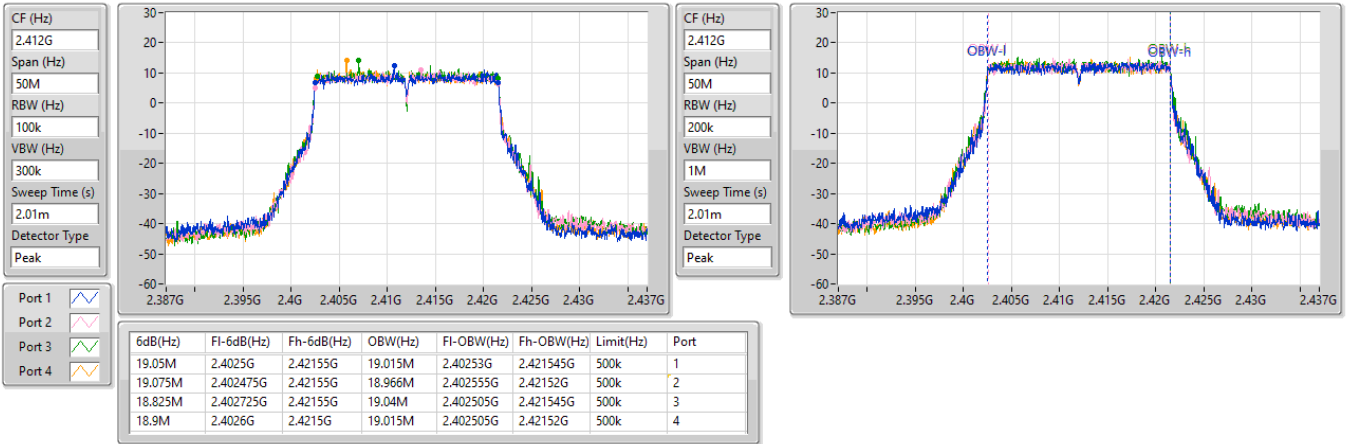


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

2437MHz

28/03/2026

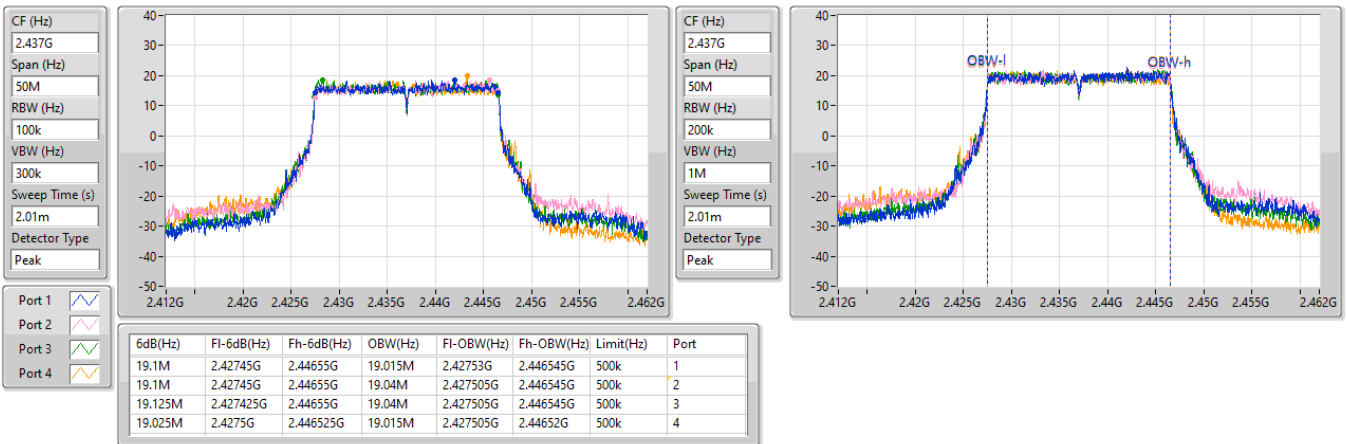


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

2462MHz

28/03/2026

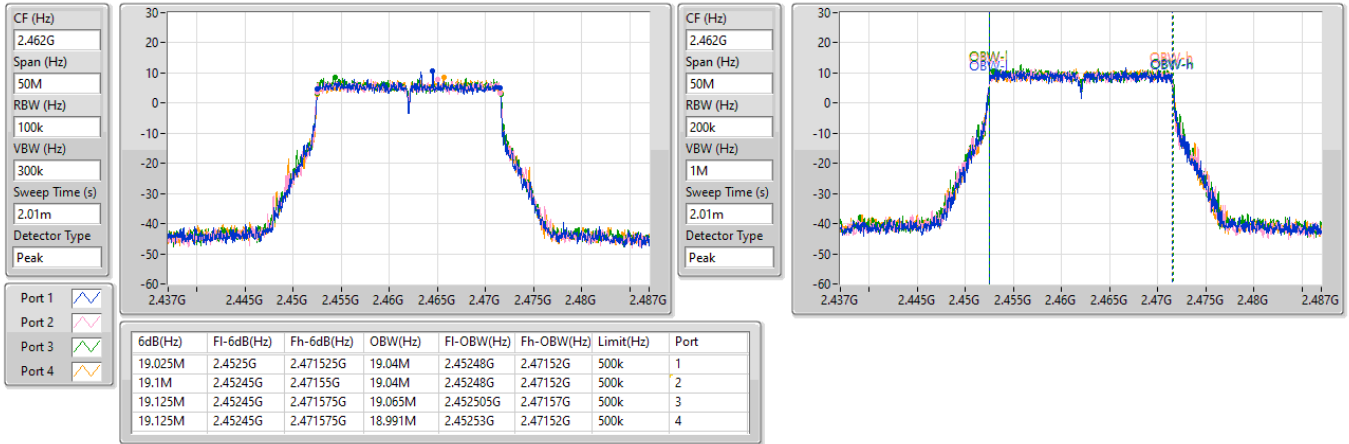



Average Power_Mode 1

Appendix C.1

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	28.78	0.75509
802.11g_Nss1,(6Mbps)_2TX	27.82	0.60534
802.11ax HEW20_Nss1,(MCS0)_2TX	28.34	0.68234



Average Power_Mode 1

Appendix C.1

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.89	24.71	25.11	27.92	30.00
2437MHz	Pass	4.89	25.88	25.65	28.78	30.00
2457MHz	Pass	4.89	21.62	21.89	24.77	30.00
2462MHz	Pass	4.89	21.31	21.45	24.39	30.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.89	20.54	20.94	23.75	30.00
2417MHz	Pass	4.89	22.51	22.87	25.70	30.00
2437MHz	Pass	4.89	24.96	24.65	27.82	30.00
2457MHz	Pass	4.89	19.79	19.98	22.90	30.00
2462MHz	Pass	4.89	17.88	18.15	21.03	30.00
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.89	17.12	17.59	20.37	30.00
2417MHz	Pass	4.89	22.09	22.39	25.25	30.00
2437MHz	Pass	4.89	25.42	25.23	28.34	30.00
2457MHz	Pass	4.89	19.82	20.08	22.96	30.00
2462MHz	Pass	4.89	18.01	18.15	21.09	30.00

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	26.16	0.41305
802.11b_Nss1,(1Mbps)_2TX	29.15	0.82224
802.11b_Nss1,(1Mbps)_4TX	29.96	0.99083
802.11g_Nss1,(6Mbps)_1TX	26.12	0.40926
802.11g_Nss1,(6Mbps)_2TX	28.56	0.71779
802.11g_Nss1,(6Mbps)_4TX	29.03	0.79983
802.11be EHT20_Nss1,(MCS0)_1TX	26.23	0.41976
802.11be EHT20_Nss1,(MCS0)_2TX	27.26	0.53211
802.11be EHT20_Nss1,(MCS0)_4TX	28.61	0.72611
802.11be EHT20-BF_Nss1,(MCS0)_2TX	27.26	0.53211
802.11be EHT20-BF_Nss1,(MCS0)_4TX	28.61	0.72611



Average Power_Mode 2

Appendix C.2

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.26	25.87				25.87	30.00
2437MHz	Pass	3.26	26.16				26.16	30.00
2462MHz	Pass	3.26	26.03				26.03	30.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.26	19.51				19.51	30.00
2417MHz	Pass	3.26	22.59				22.59	30.00
2437MHz	Pass	3.26	26.12				26.12	30.00
2457MHz	Pass	3.26	22.64				22.64	30.00
2462MHz	Pass	3.26	19.69				19.69	30.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.26	18.22				18.22	30.00
2417MHz	Pass	3.26	21.60				21.60	30.00
2437MHz	Pass	3.26	26.23				26.23	30.00
2457MHz	Pass	3.26	21.35				21.35	30.00
2462MHz	Pass	3.26	18.38				18.38	30.00
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	25.05	25.01			28.04	30.00
2437MHz	Pass	4.94	26.04	26.24			29.15	30.00
2457MHz	Pass	4.94	23.74	23.56			26.66	30.00
2462MHz	Pass	4.94	22.73	22.52			25.64	30.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	17.40	17.75			20.59	30.00
2417MHz	Pass	4.94	21.43	21.56			24.51	30.00
2437MHz	Pass	4.94	25.57	25.52			28.56	30.00
2457MHz	Pass	4.94	21.19	21.12			24.17	30.00
2462MHz	Pass	4.94	18.20	18.12			21.17	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	16.10	16.37			19.25	30.00
2417MHz	Pass	4.94	19.21	19.18			22.21	30.00
2437MHz	Pass	4.94	24.30	24.20			27.26	30.00
2457MHz	Pass	4.94	20.35	20.33			23.35	30.00
2462MHz	Pass	4.94	15.93	15.82			18.89	30.00
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	21.98	22.03	21.89	21.80	27.95	30.00
2437MHz	Pass	4.94	24.22	24.06	23.64	23.83	29.96	30.00
2457MHz	Pass	4.94	21.09	21.13	20.71	20.55	26.90	30.00
2462MHz	Pass	4.94	21.19	21.13	20.67	20.63	26.93	30.00
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	17.09	17.19	17.07	16.61	23.02	30.00
2417MHz	Pass	4.94	18.08	18.15	18.13	17.38	23.97	30.00
2437MHz	Pass	4.94	23.21	23.19	22.86	22.76	29.03	30.00
2457MHz	Pass	4.94	21.66	21.65	21.39	21.12	27.48	30.00
2462MHz	Pass	4.94	14.88	14.78	14.54	14.31	20.65	30.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	15.34	15.54	15.33	14.73	21.27	30.00
2417MHz	Pass	4.94	17.12	17.18	17.32	16.59	23.08	30.00
2437MHz	Pass	4.94	22.92	22.78	22.55	22.04	28.61	30.00
2457MHz	Pass	4.94	17.35	17.35	17.11	16.73	23.16	30.00
2462MHz	Pass	4.94	12.47	12.53	12.43	11.95	18.37	30.00
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	16.10	16.37			19.25	30.00
2417MHz	Pass	4.94	19.21	19.18			22.21	30.00
2437MHz	Pass	4.94	24.30	24.20			27.26	30.00
2457MHz	Pass	4.94	20.35	20.33			23.35	30.00



Average Power_Mode 2

Appendix C.2

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
2462MHz	Pass	4.94	15.93	15.82			18.89	30.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.91	15.34	15.54	15.33	14.73	21.27	29.09
2417MHz	Pass	6.91	17.12	17.18	17.32	16.59	23.08	29.09
2437MHz	Pass	6.91	22.92	22.78	22.55	22.04	28.61	29.09
2457MHz	Pass	6.91	17.35	17.35	17.11	16.73	23.16	29.09
2462MHz	Pass	6.91	12.47	12.53	12.43	11.95	18.37	29.09

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	4.71
802.11g_Nss1,(6Mbps)_2TX	0.44
802.11ax HEW20_Nss1,(MCS0)_2TX	2.06

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.76	1.54	1.86	4.71	6.24
2437MHz	Pass	7.76	1.73	1.02	4.37	6.24
2462MHz	Pass	7.76	-4.06	-3.91	-0.97	6.24
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.76	-5.45	-6.07	-3.27	6.24
2437MHz	Pass	7.76	-1.79	-1.35	0.44	6.24
2462MHz	Pass	7.76	-8.06	-8.65	-5.59	6.24
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.76	-8.35	-7.86	-5.89	6.24
2437MHz	Pass	7.76	-0.10	-0.44	2.06	6.24
2462MHz	Pass	7.76	-6.96	-7.13	-4.77	6.24


DG = Directional Gain; RBW = 3kHz;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2412MHz

21/03/2026

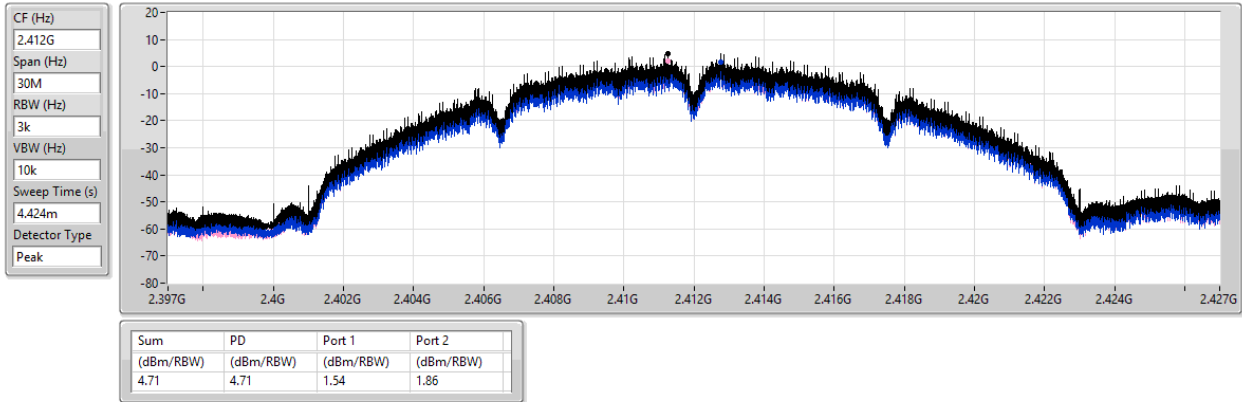


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2437MHz

21/03/2026

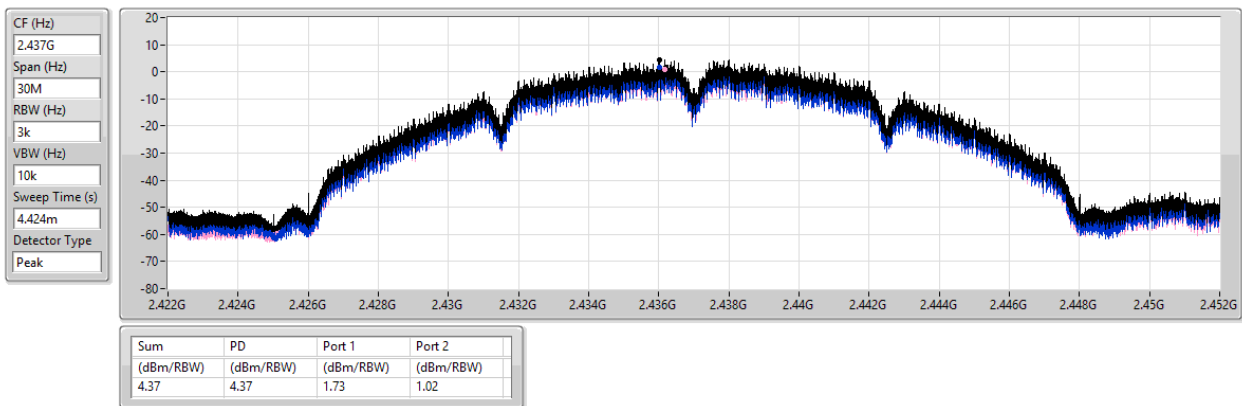


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2462MHz

21/03/2026

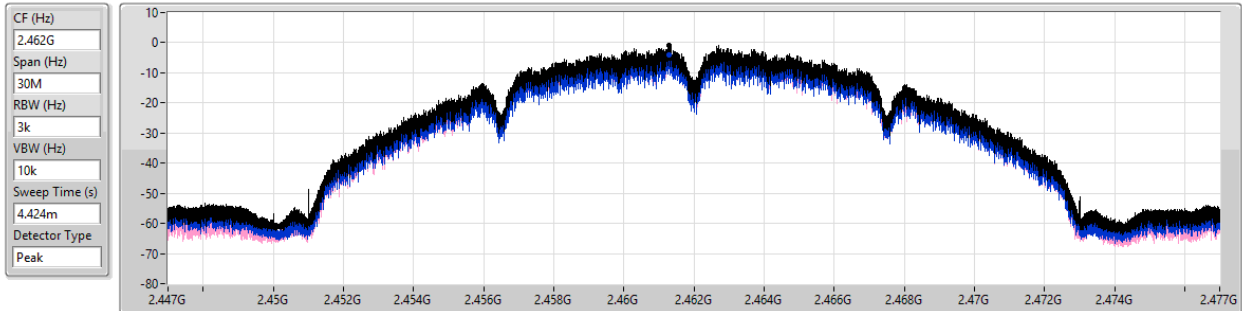


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.97	-0.97	-4.06	-3.91

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2412MHz

21/03/2026

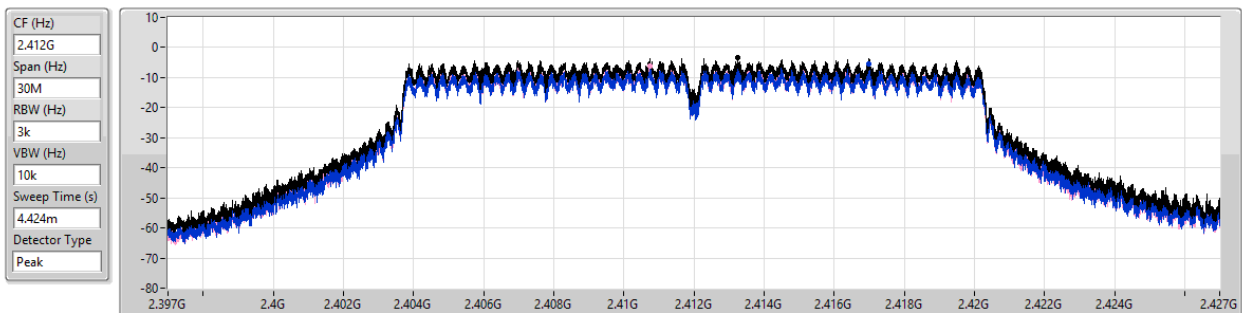


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.27	-3.27	-5.45	-6.07

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2437MHz

21/03/2026

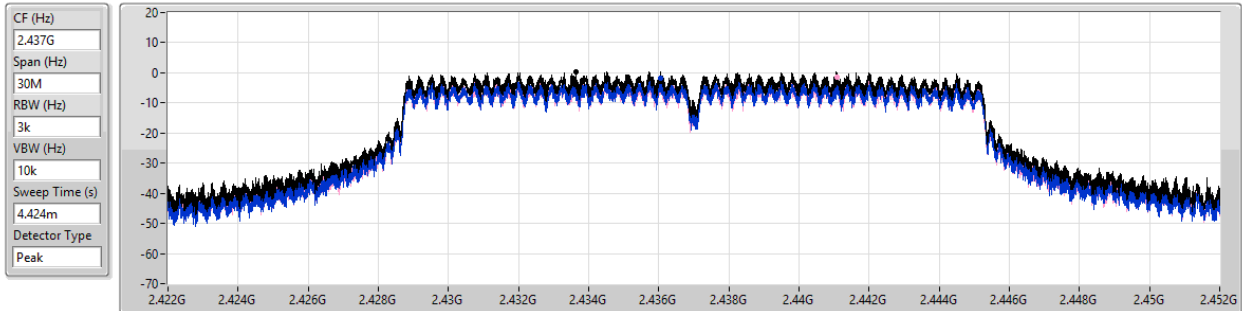


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.44	0.44	-1.79	-1.35

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2462MHz

21/03/2026

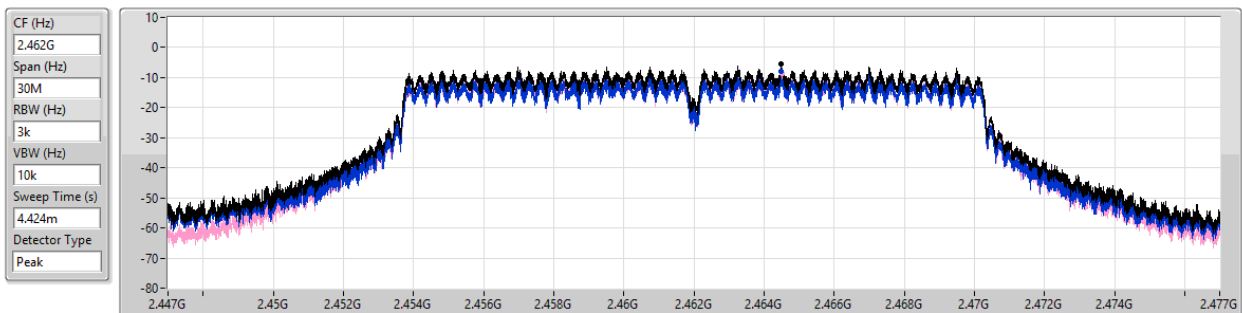

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.59	-5.59	-8.06	-8.65

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

2412MHz

21/03/2026

CF (Hz)
2.412G


Span (Hz)
30M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
4.424m

Detector Type
Peak

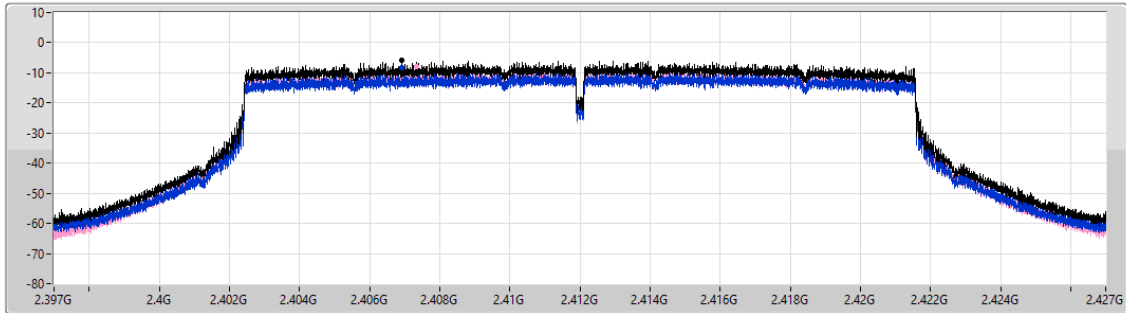

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-5.89	-5.89	-8.35	-7.86

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

2437MHz

21/03/2026

CF (Hz)
2.437G


Span (Hz)
30M

RBW (Hz)
3k

VBW (Hz)
10k

Sweep Time (s)
4.424m

Detector Type
Peak

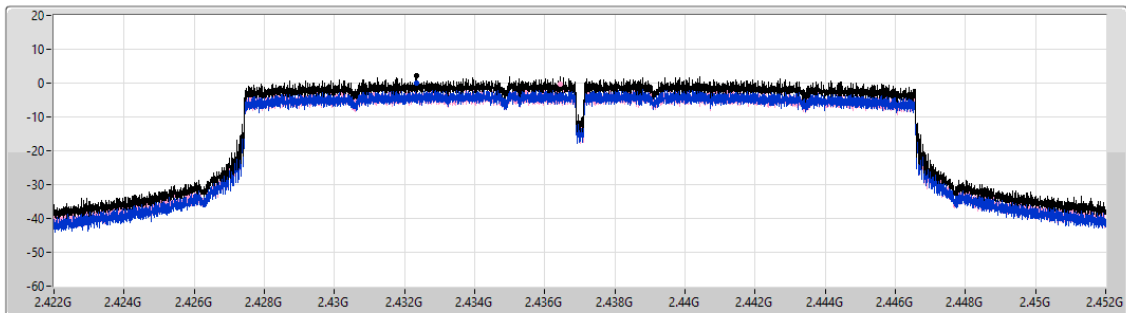

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.06	2.06	-0.10	-0.44


2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

2462MHz

21/03/2026

CF (Hz)
2.462G
Span (Hz)
30M
RBW (Hz)
3k
VBW (Hz)
10k
Sweep Time (s)
4.424m
Detector Type
Peak

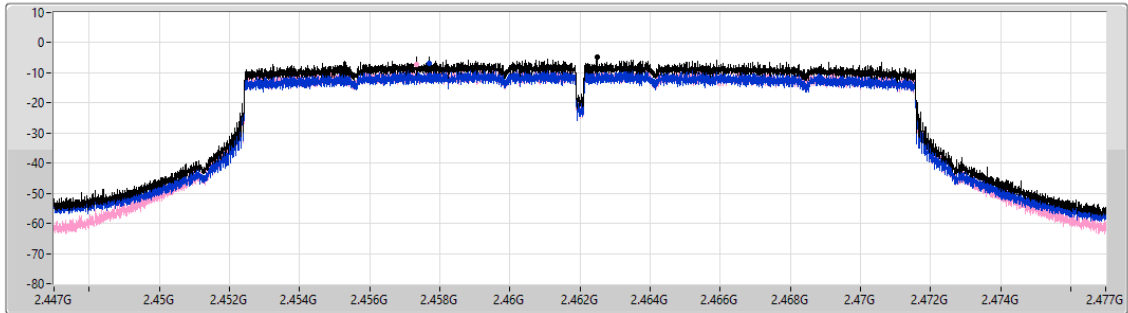

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.77	-4.77	-6.96	-7.13

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	2.16
802.11b_Nss1,(1Mbps)_2TX	4.92
802.11b_Nss1,(1Mbps)_4TX	4.90
802.11g_Nss1,(6Mbps)_1TX	-1.03
802.11g_Nss1,(6Mbps)_2TX	-0.61
802.11g_Nss1,(6Mbps)_4TX	0.12
802.11be EHT20_Nss1,(MCS0)_1TX	-0.01
802.11be EHT20_Nss1,(MCS0)_2TX	-1.21
802.11be EHT20_Nss1,(MCS0)_4TX	-1.03

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.26	2.16				2.16	8.00
2437MHz	Pass	3.26	1.94				1.94	8.00
2462MHz	Pass	3.26	1.87				1.87	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.26	-9.74				-9.74	8.00
2437MHz	Pass	3.26	-1.03				-1.03	8.00
2462MHz	Pass	3.26	-9.35				-9.35	8.00
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.26	-9.73				-9.73	8.00
2437MHz	Pass	3.26	-0.01				-0.01	8.00
2462MHz	Pass	3.26	-9.37				-9.37	8.00
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	0.65	0.32			3.50	8.00
2437MHz	Pass	4.94	1.91	1.96			4.92	8.00
2462MHz	Pass	4.94	-0.99	-0.90			2.05	8.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	-11.65	-11.08			-8.81	8.00
2437MHz	Pass	4.94	-3.25	-3.36			-0.61	8.00
2462MHz	Pass	4.94	-10.42	-8.56			-7.24	8.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.94	-11.80	-11.16			-9.06	8.00
2437MHz	Pass	4.94	-3.32	-2.95			-1.21	8.00
2462MHz	Pass	4.94	-11.77	-12.27			-9.73	8.00
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.91	-2.06	-1.99	-2.40	-2.77	3.21	7.09
2437MHz	Pass	6.91	0.08	-0.60	-0.70	-0.66	4.90	7.09
2462MHz	Pass	6.91	-4.31	-3.60	-4.12	-3.22	1.92	7.09
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.91	-12.33	-11.34	-11.99	-11.95	-6.48	7.09
2437MHz	Pass	6.91	-4.46	-4.29	-4.97	-4.37	0.12	7.09
2462MHz	Pass	6.91	-12.06	-14.18	-14.67	-14.43	-9.07	7.09
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.91	-11.90	-11.35	-12.26	-12.19	-7.90	7.09
2437MHz	Pass	6.91	-4.43	-4.97	-5.30	-5.26	-1.03	7.09
2462MHz	Pass	6.91	-15.60	-14.78	-14.51	-15.80	-11.41	7.09


DG = Directional Gain; RBW = 3kHz;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD

2412MHz

16/02/2026

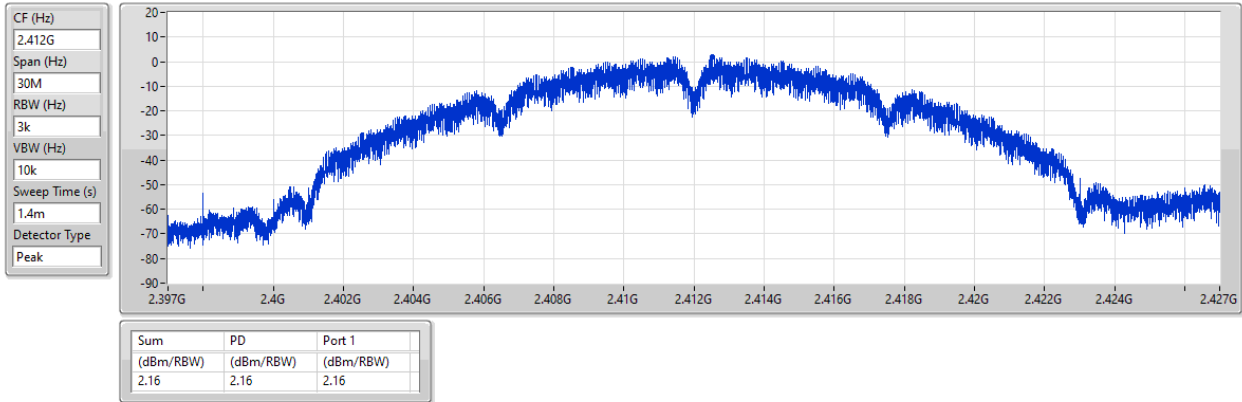


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD

2437MHz

16/02/2026

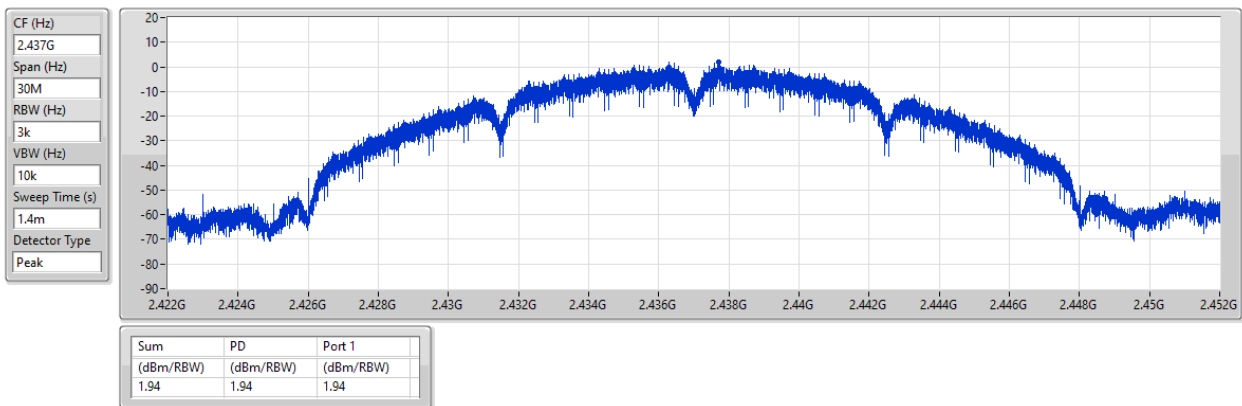


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

PSD

2462MHz

16/02/2026

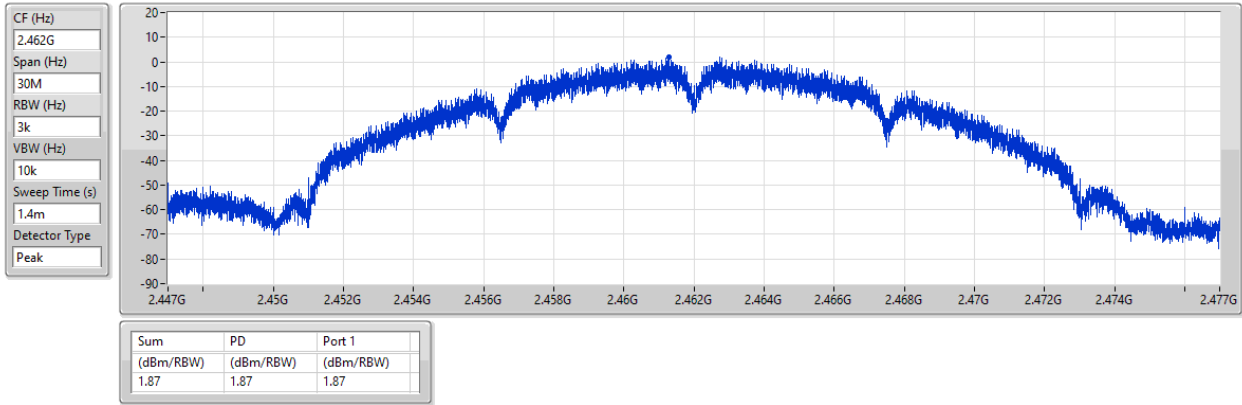


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD

2412MHz

17/02/2026

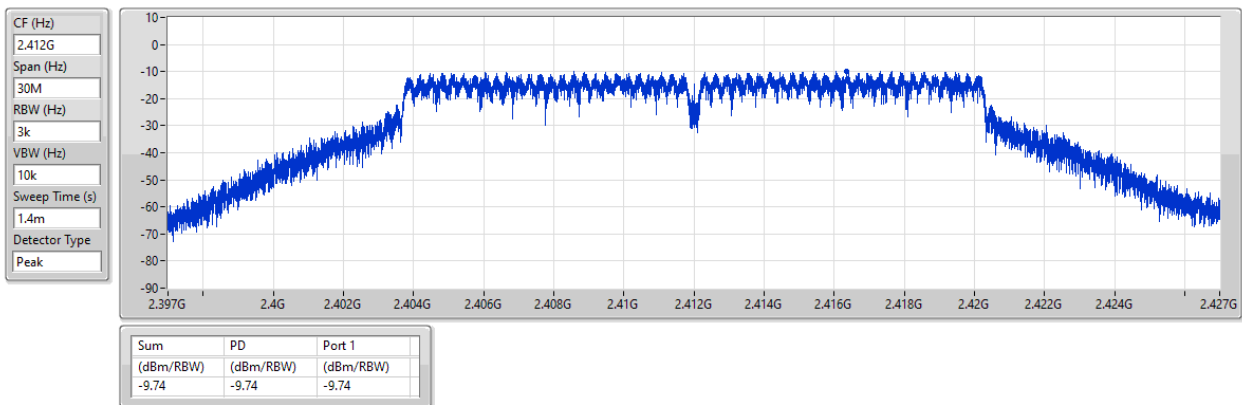


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD

2437MHz

17/02/2026

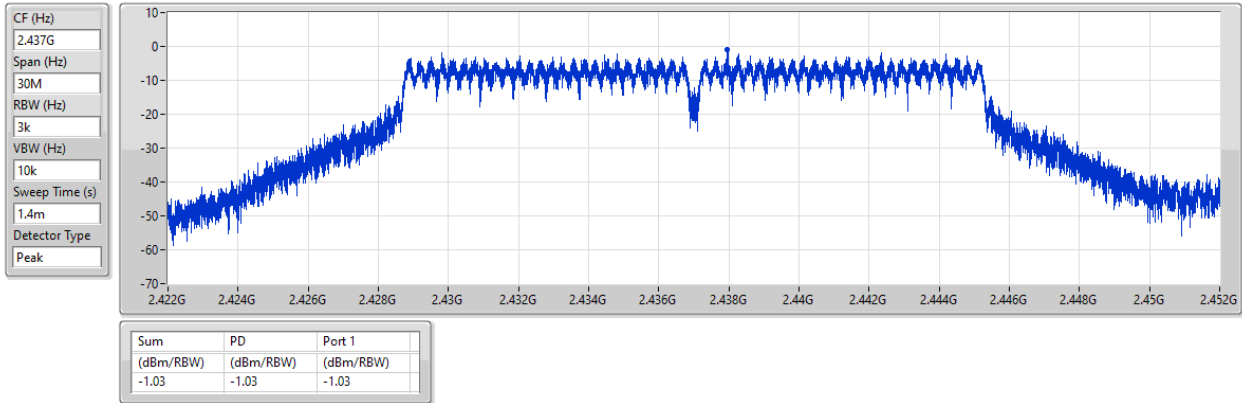


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

PSD

2462MHz

17/02/2026

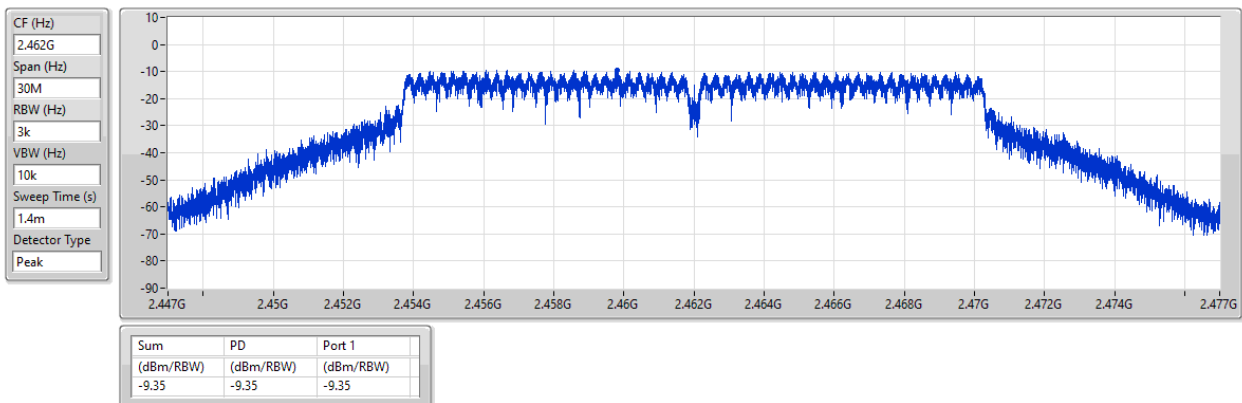


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

2412MHz

17/02/2026

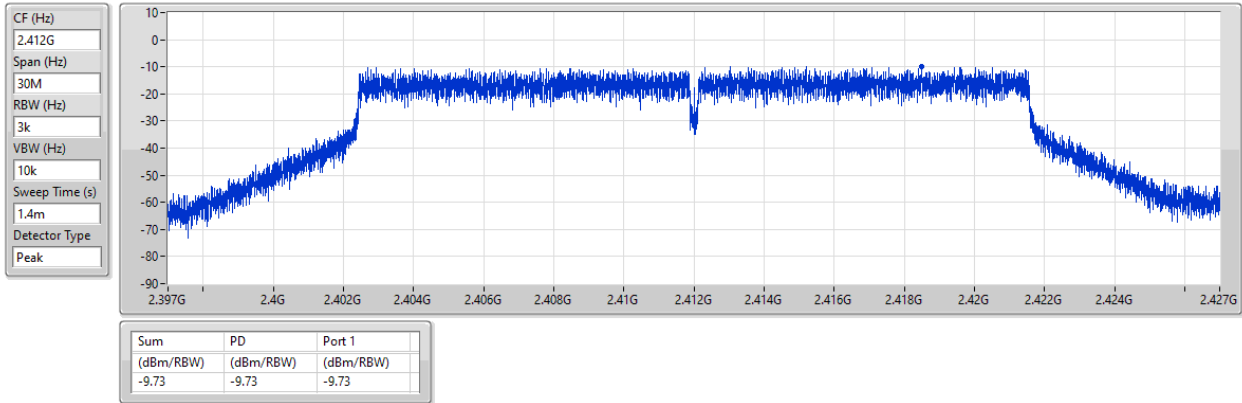


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

2437MHz

17/02/2026

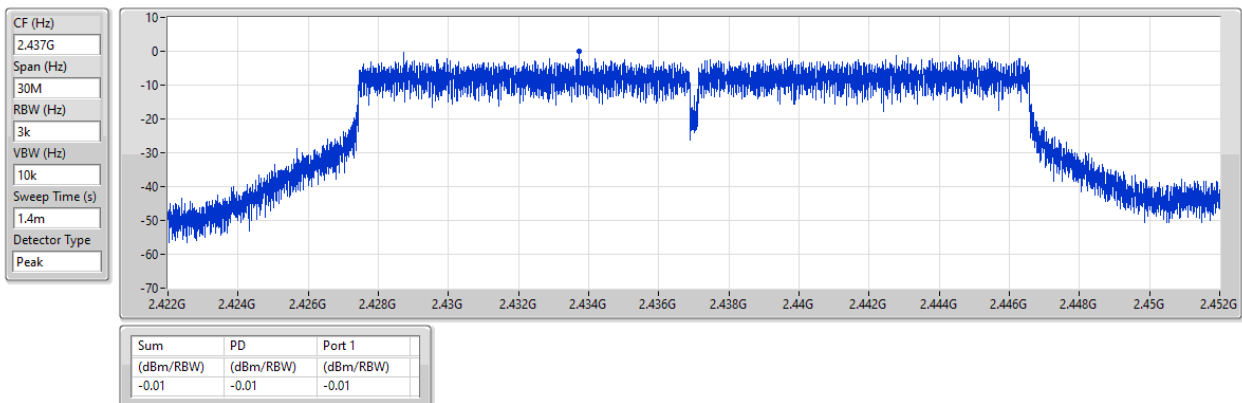


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

2462MHz

17/02/2026

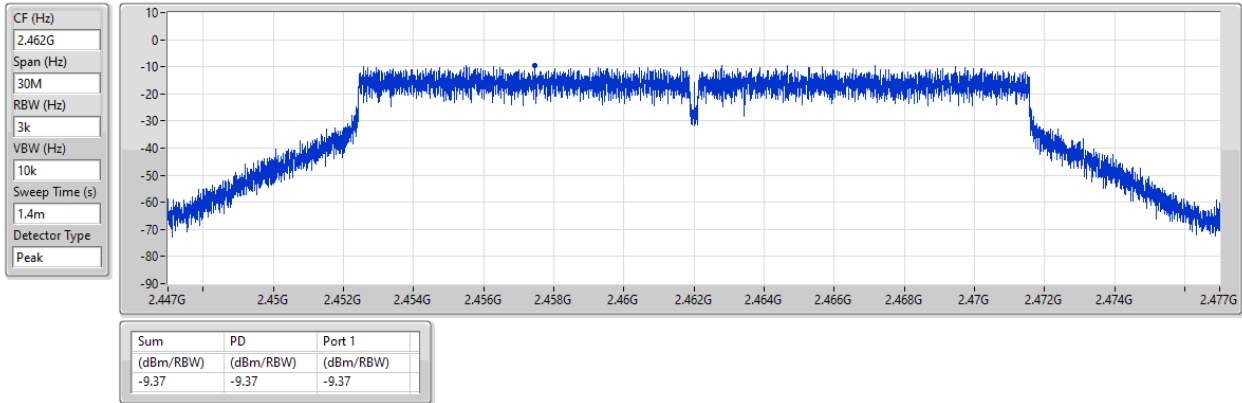


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2412MHz

16/02/2026

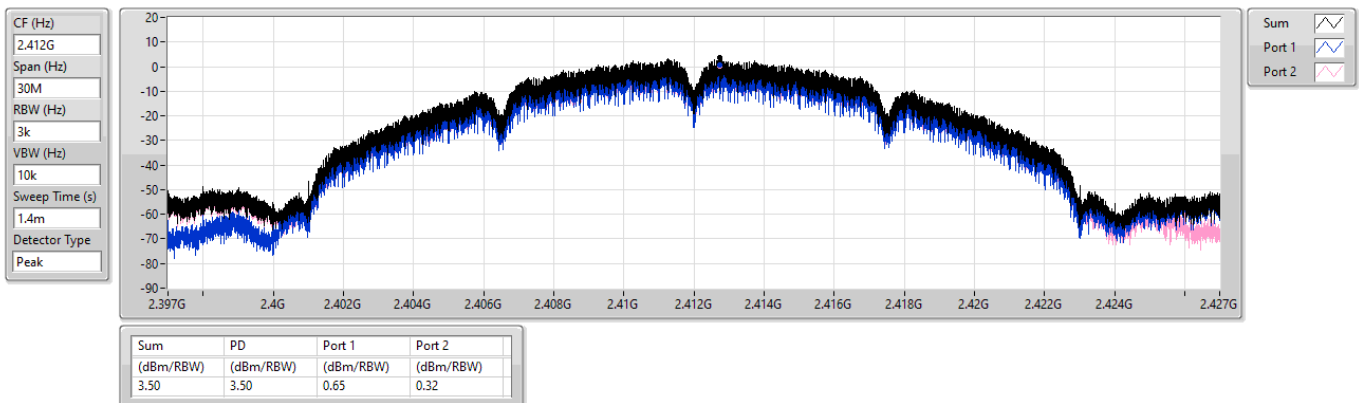


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2437MHz

16/02/2026

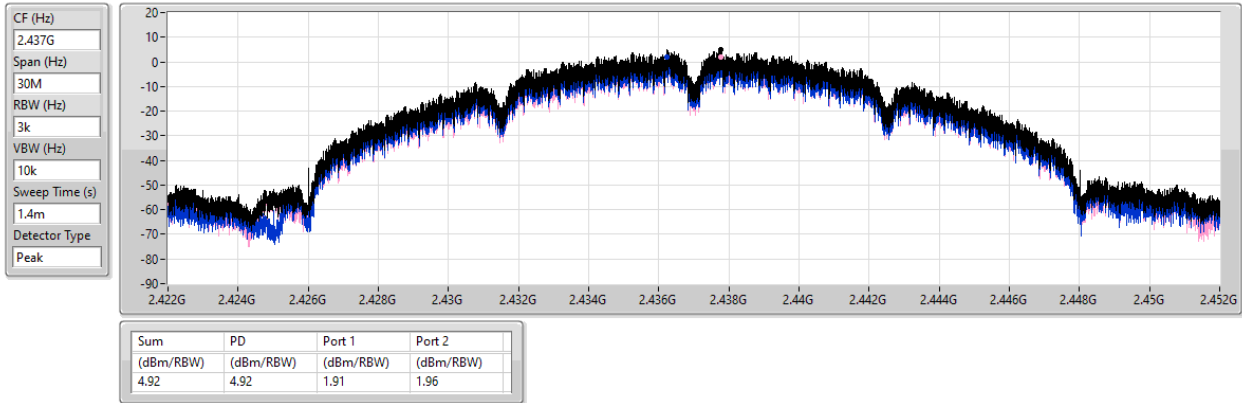


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2462MHz

16/02/2026

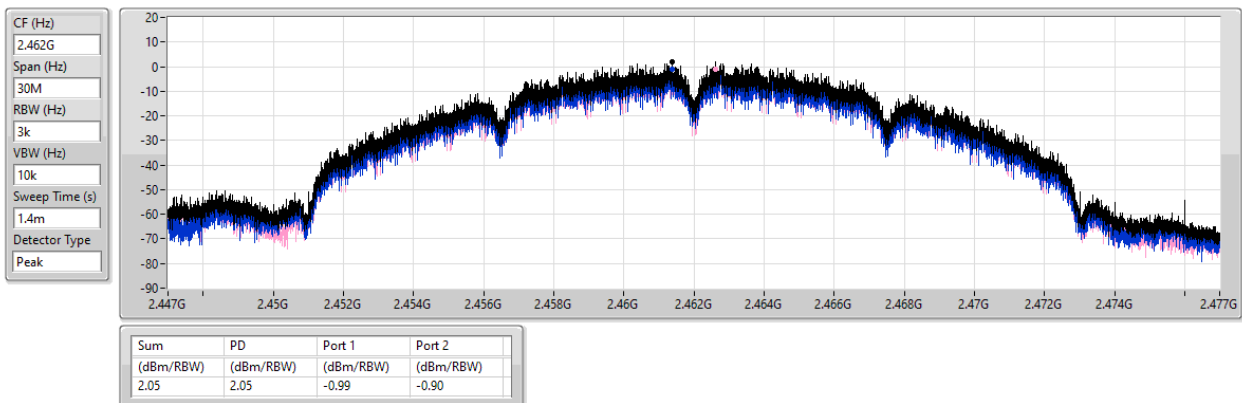


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2412MHz

17/02/2026

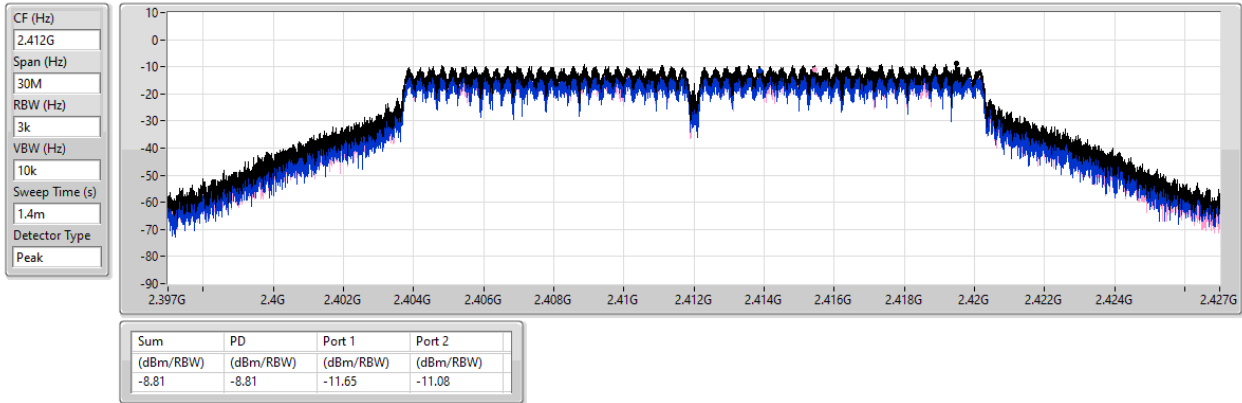


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2437MHz

17/02/2026

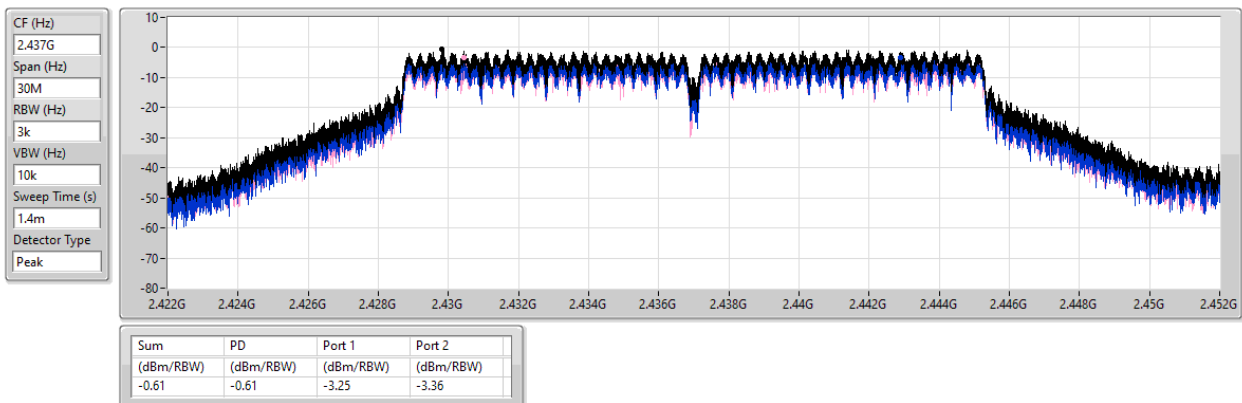


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2462MHz

17/02/2026

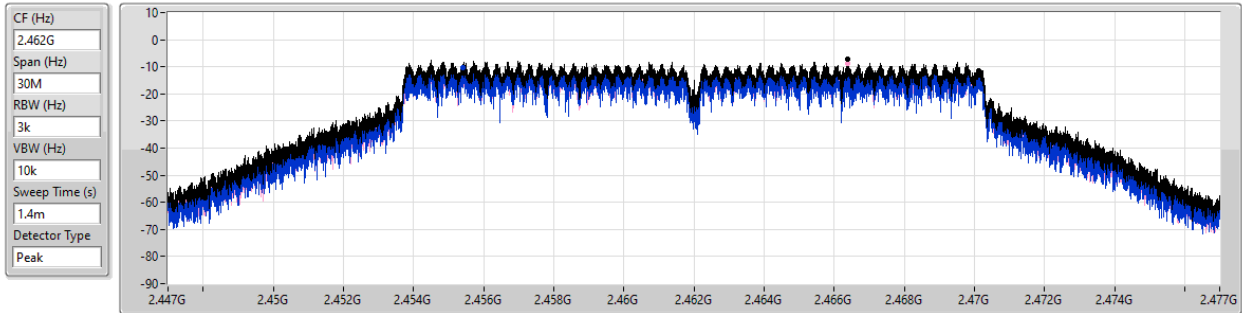


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.24	-7.24	-10.42	-8.56

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2412MHz

17/02/2026

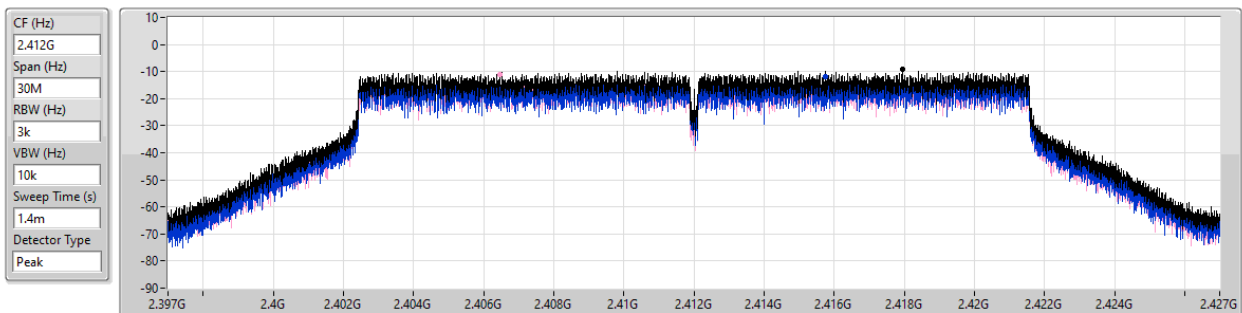


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.06	-9.06	-11.80	-11.16

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2437MHz

17/02/2026

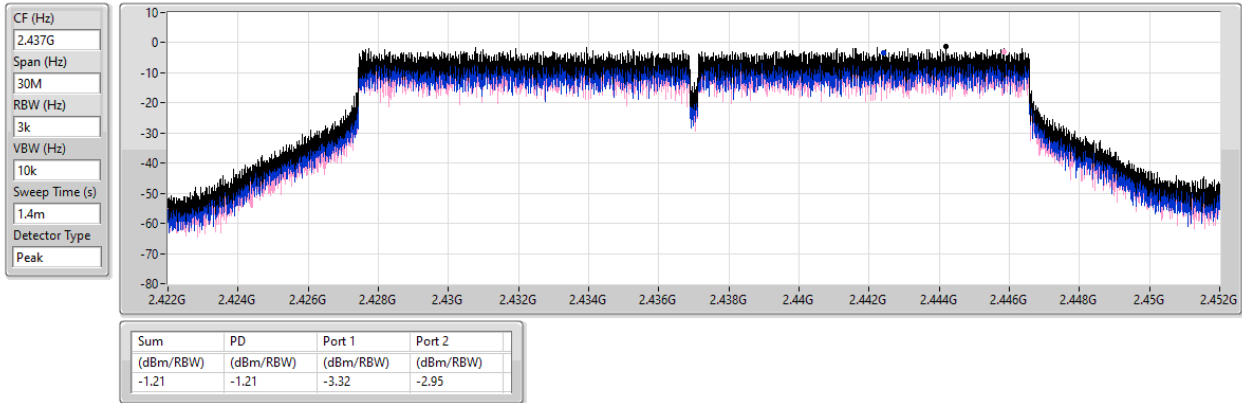


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2462MHz

17/02/2026

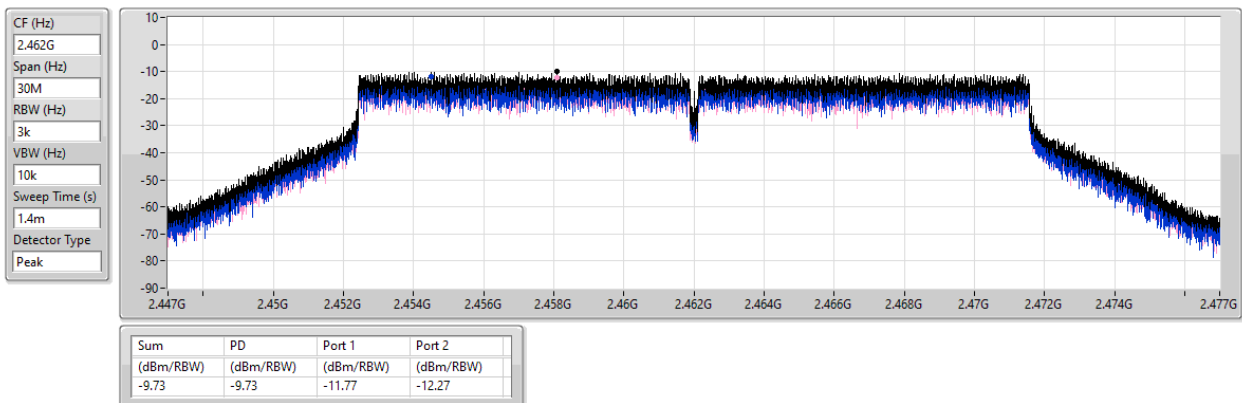


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2412MHz

16/02/2026

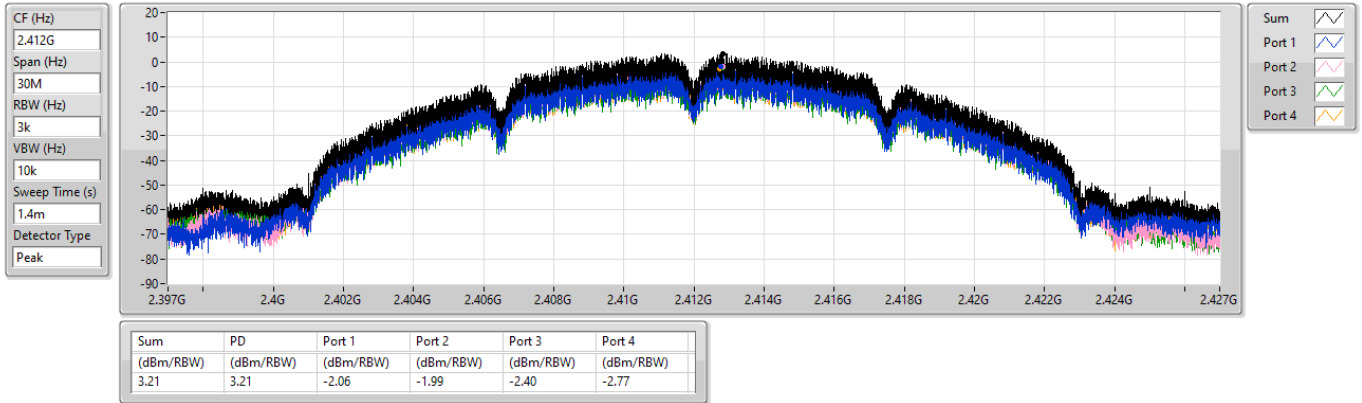


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2437MHz

16/02/2026

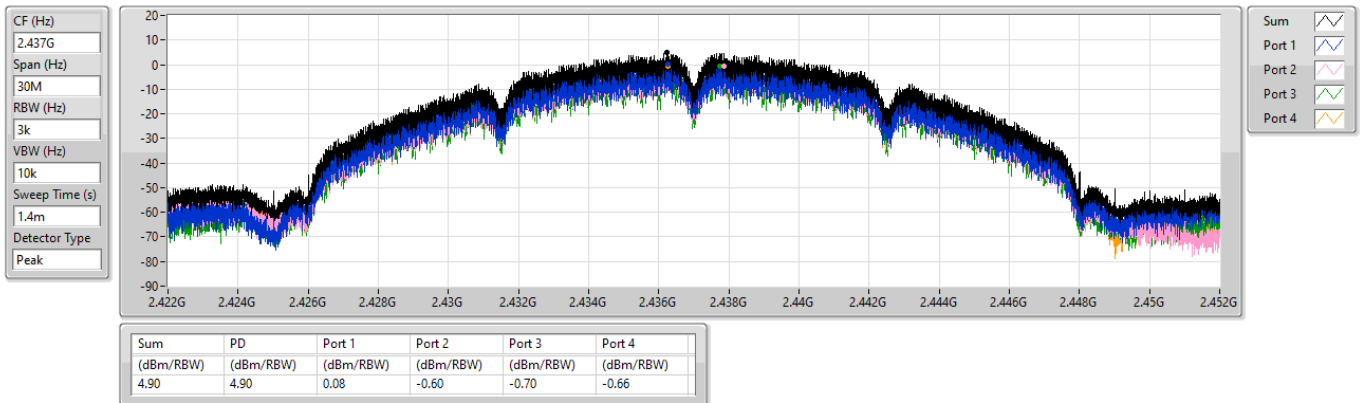


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2462MHz

17/02/2026

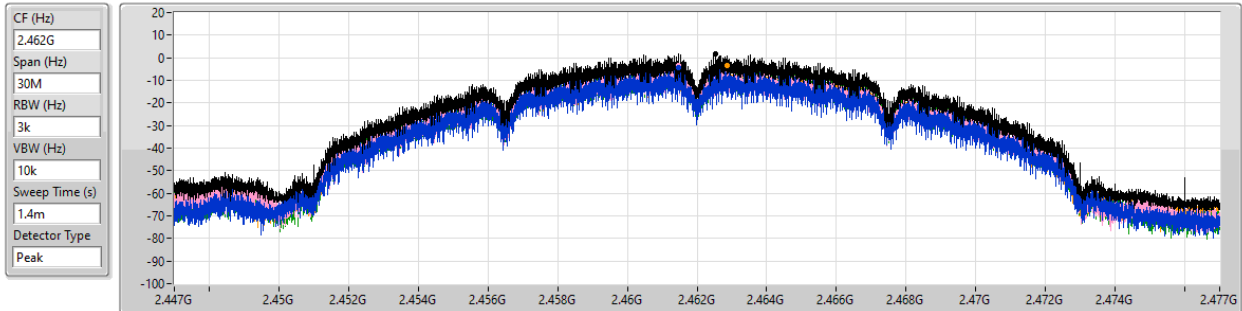


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.92	1.92	-4.31	-3.60	-4.12	-3.22

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2412MHz

17/02/2026

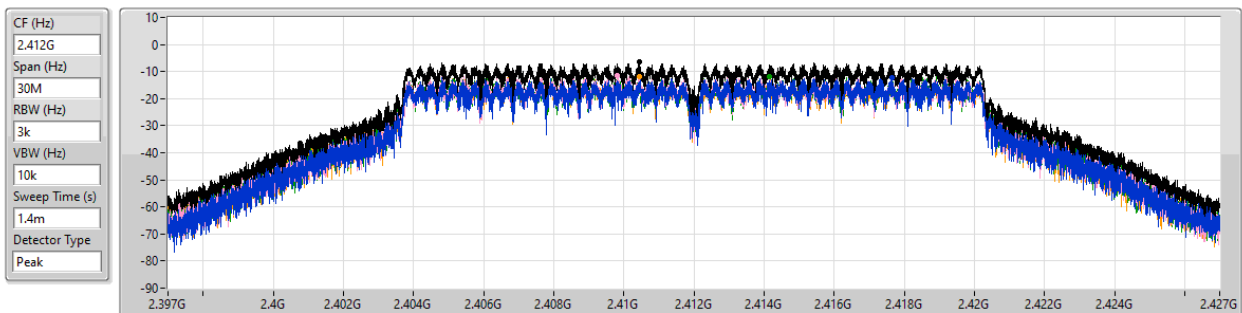


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.48	-6.48	-12.33	-11.34	-11.99	-11.95

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2437MHz

17/02/2026

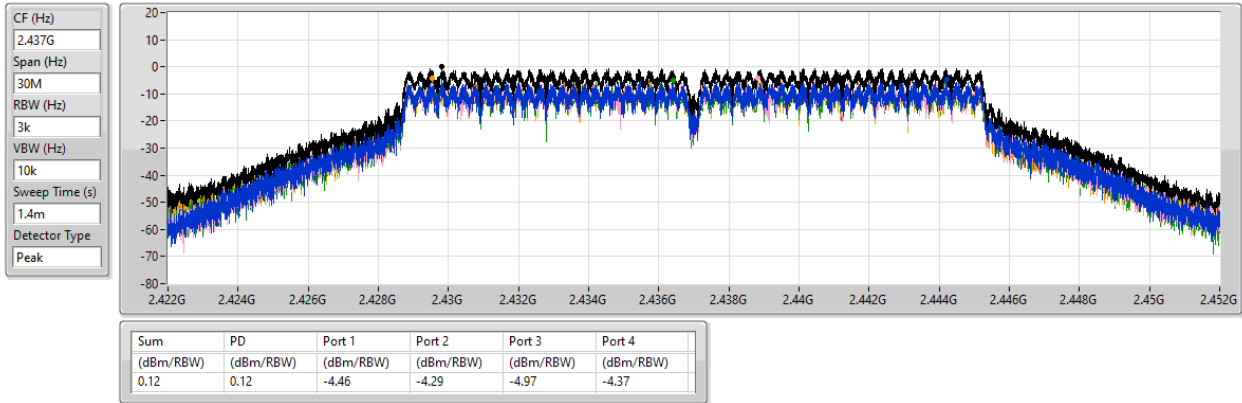


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2462MHz

17/02/2026

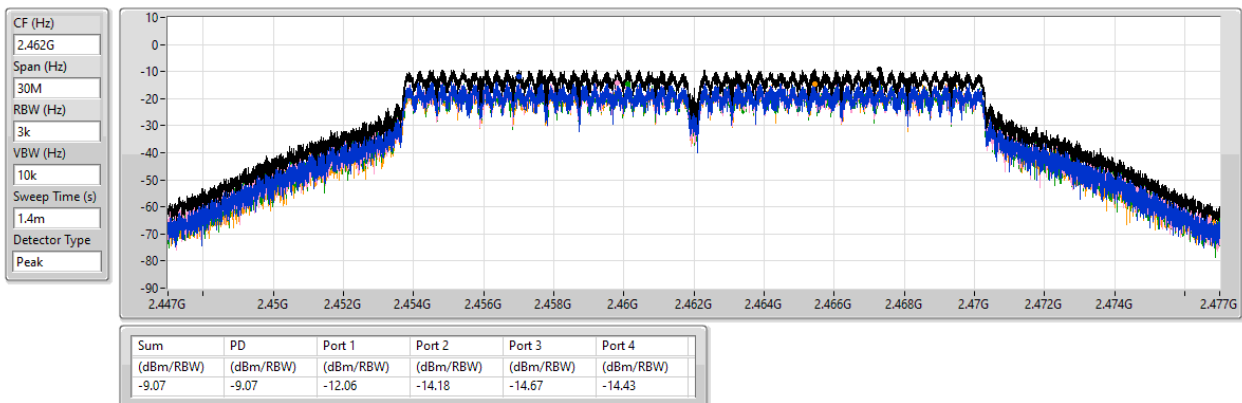


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2412MHz

17/02/2026

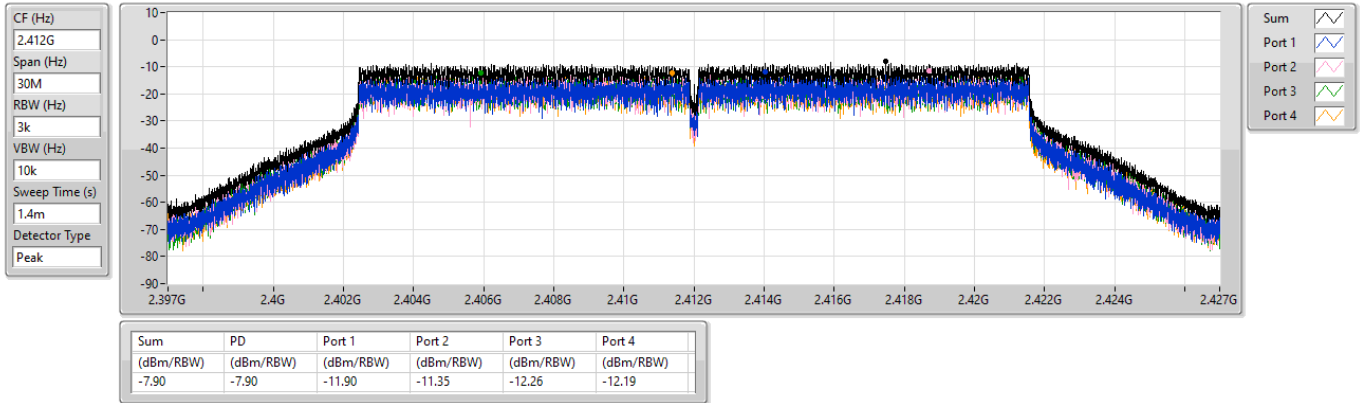

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2437MHz

17/02/2026




2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2462MHz

17/02/2026

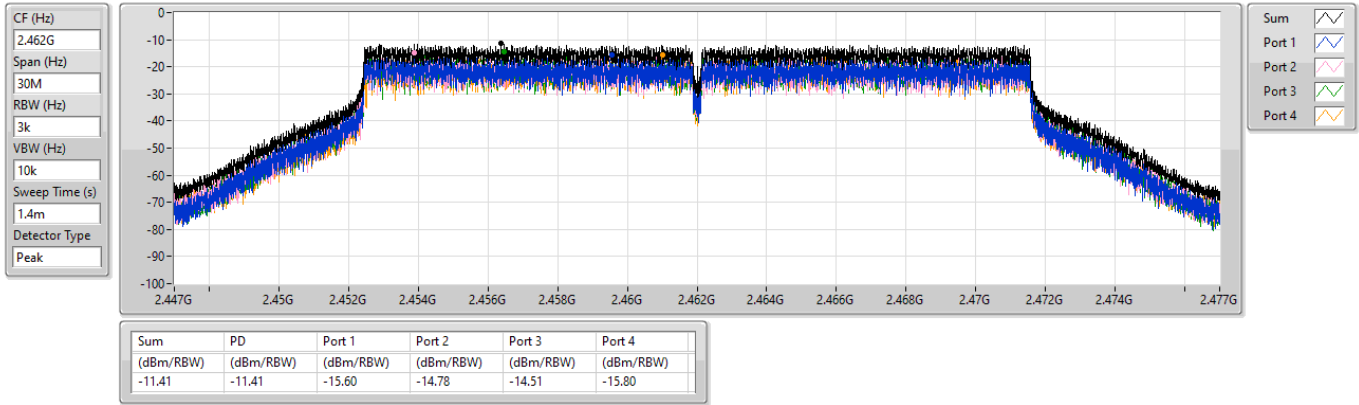



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43641G	15.87	-14.13	2.30991G	-51.56	2.39984G	-38.59	2.4G	-43.21	2.5195G	-49.97	17.62209G	-42.94	1
802.11g_Nss1,(6Mbps)_2TX	Pass	2.43958G	13.72	-16.28	1.63304G	-52.91	2.4G	-32.99	2.4G	-30.05	2.50974G	-50.31	15.25082G	-42.08	1
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	2.43206G	13.43	-16.57	2.30408G	-52.65	2.4G	-33.97	2.4G	-34.60	2.50054G	-51.52	15.27329G	-42.37	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43641G	15.87	-14.13	2.30991G	-51.56	2.39984G	-38.59	2.4G	-43.21	2.5195G	-49.97	17.62209G	-42.94	1
2412MHz	Pass	2.43641G	15.87	-14.13	2.30059G	-52.46	2.4G	-38.82	2.4G	-41.99	2.51806G	-50.51	15.23677G	-43.05	2
2417MHz															
2437MHz	Pass	2.43641G	15.87	-14.13	2.30525G	-50.70	2.4G	-47.41	2.4G	-48.75	2.51006G	-50.38	15.20587G	-41.85	1
2437MHz	Pass	2.43641G	15.87	-14.13	2.30991G	-48.15	2.39888G	-49.00	2.4G	-50.92	2.50078G	-50.34	16.49264G	-42.27	2
2457MHz															
2462MHz	Pass	2.43641G	15.87	-14.13	2.30059G	-51.12	2.39616G	-51.98	2.4G	-51.71	2.5011G	-50.35	17.60804G	-42.81	1
2462MHz	Pass	2.43641G	15.87	-14.13	2.30874G	-51.74	2.39176G	-51.30	2.4G	-51.52	2.51854G	-50.10	15.23396G	-42.76	2
802.11g_Nss1(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43958G	13.72	-16.28	1.63304G	-52.91	2.4G	-32.99	2.4G	-30.05	2.50974G	-50.31	15.25082G	-42.08	1
2412MHz	Pass	2.43958G	13.72	-16.28	2.0571G	-53.00	2.39992G	-32.64	2.4G	-31.86	2.50622G	-51.01	15.22553G	-41.87	2
2417MHz															
2437MHz	Pass	2.43958G	13.72	-16.28	2.30525G	-51.64	2.4G	-48.83	2.4G	-49.58	2.52158G	-50.28	15.21429G	-43.00	1
2437MHz	Pass	2.43958G	13.72	-16.28	2.30641G	-49.61	2.39696G	-49.04	2.4G	-46.82	2.50206G	-50.42	23.39293G	-42.10	2
2457MHz															
2462MHz	Pass	2.43958G	13.72	-16.28	2.30175G	-53.08	2.4G	-52.52	2.4G	-51.41	2.51886G	-50.64	15.21148G	-42.38	1
2462MHz	Pass	2.43958G	13.72	-16.28	2.30525G	-52.47	2.39656G	-52.20	2.4G	-53.03	2.50038G	-50.66	17.59961G	-43.28	2
802.11ax HEW20_Nss1(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43206G	13.43	-16.57	2.30641G	-52.99	2.39968G	-34.98	2.4G	-35.23	2.51814G	-51.26	16.51512G	-42.56	1
2412MHz	Pass	2.43206G	13.43	-16.57	2.30408G	-52.65	2.4G	-33.97	2.4G	-34.60	2.50054G	-51.52	15.27329G	-42.37	2
2417MHz															
2437MHz	Pass	2.43206G	13.43	-16.57	2.30292G	-51.33	2.4G	-46.34	2.4G	-48.45	2.50974G	-49.20	24.65161G	-42.08	1
2437MHz	Pass	2.43206G	13.43	-16.57	2.30059G	-49.77	2.39968G	-46.66	2.4G	-48.15	2.50486G	-49.18	15.20306G	-41.52	2
2457MHz															
2462MHz	Pass	2.43206G	13.43	-16.57	2.30991G	-53.09	2.39456G	-51.95	2.4G	-52.45	2.52326G	-50.13	15.25644G	-40.89	1
2462MHz	Pass	2.43206G	13.43	-16.57	2.30059G	-52.51	2.3948G	-52.28	2.4G	-52.54	2.52174G	-51.49	23.2946G	-42.86	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX


CSEndB

2412MHz

21/03/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

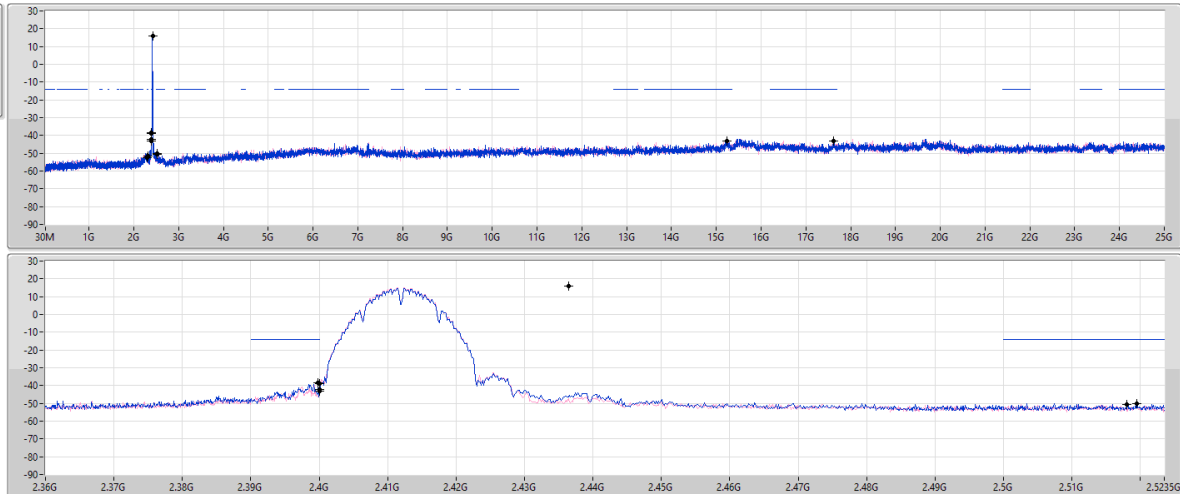

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43641G	15.87	-14.13	2.30991G	-51.56	2.39984G	-38.59	2.4G	-43.21	2.5195G	-49.97	17.62209G	-42.94	1
2.43641G	15.87	-14.13	2.30059G	-52.46	2.4G	-38.82	2.4G	-41.99	2.51806G	-50.51	15.23677G	-43.05	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX


CSEndB

2437MHz

21/03/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

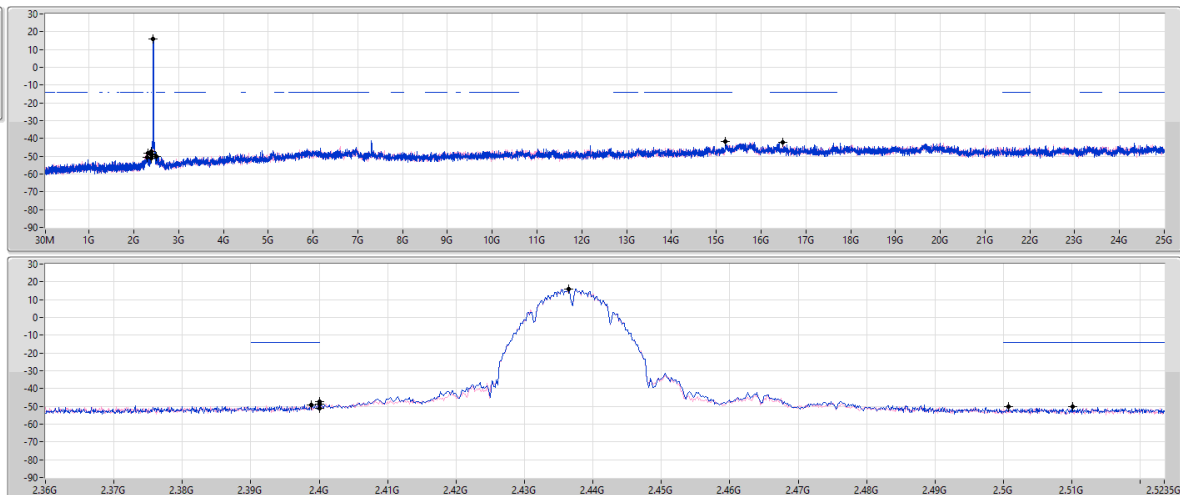


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43641G	15.87	-14.13	2.30525G	-50.70	2.4G	-47.41	2.4G	-48.75	2.51006G	-50.38	15.20587G	-41.85	1
2.43641G	15.87	-14.13	2.30991G	-48.15	2.39888G	-49.00	2.4G	-50.92	2.50078G	-50.34	16.49264G	-42.27	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

CSEndB

2462MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

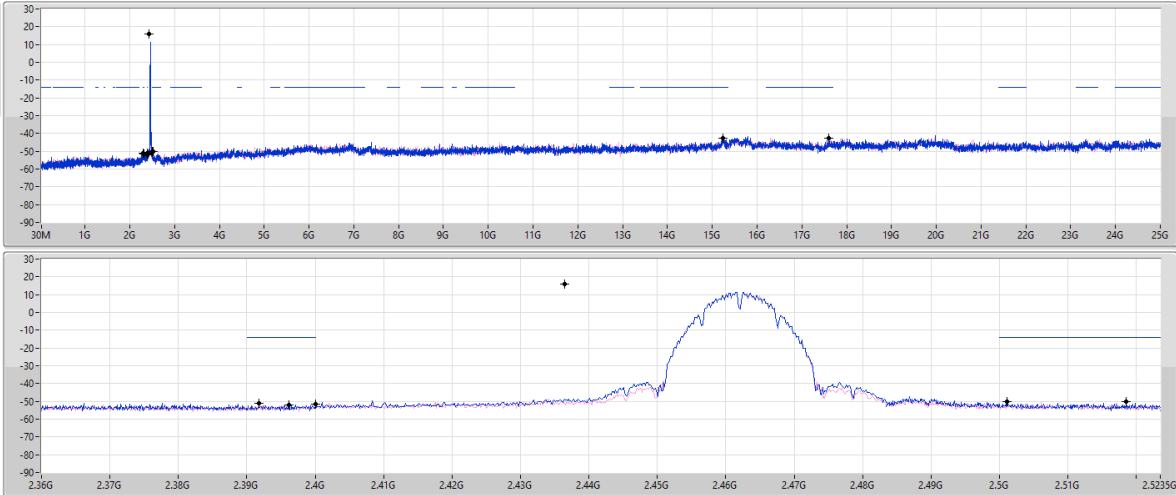


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43641G	15.87	-14.13	2.30059G	-51.12	2.39616G	-51.98	2.4G	-51.71	2.5011G	-50.35	17.60804G	-42.81	1
2.43641G	15.87	-14.13	2.30874G	-51.74	2.39176G	-51.30	2.4G	-51.52	2.51854G	-50.10	15.23396G	-42.76	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

CSEndB

2412MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

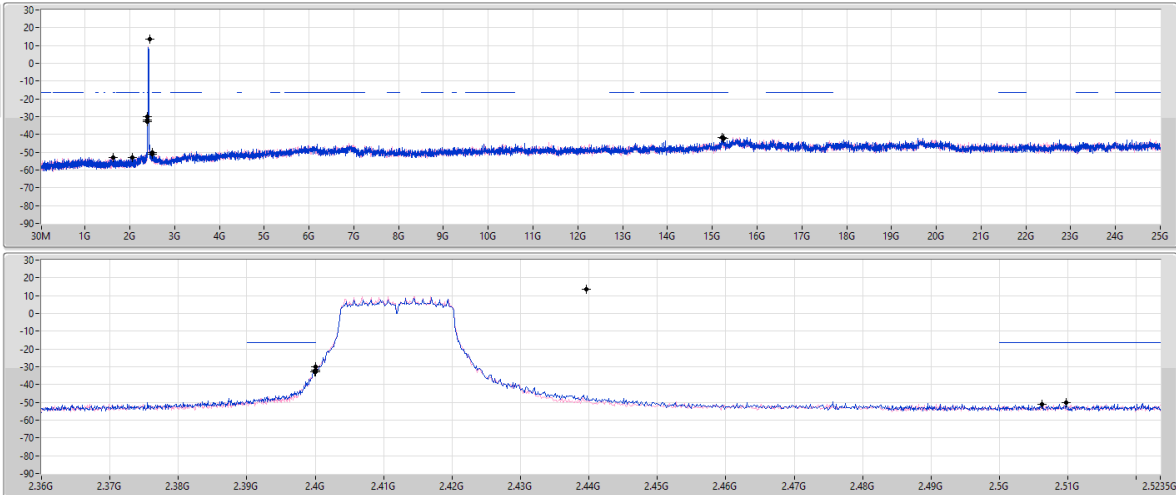

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43958G	13.72	-16.28	1.63304G	-52.91	2.4G	-32.99	2.4G	-30.05	2.50974G	-50.31	15.25082G	-42.08	1
2.43958G	13.72	-16.28	2.0571G	-53.00	2.39992G	-32.64	2.4G	-31.86	2.50622G	-51.01	15.22553G	-41.87	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX


CSEndB

2437MHz

21/03/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

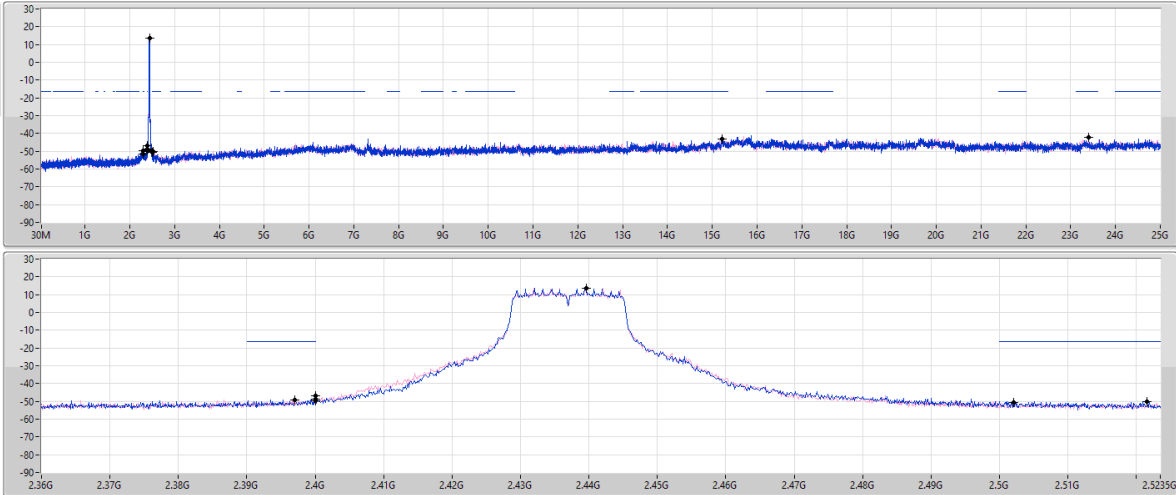

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43958G	13.72	-16.28	2.30525G	-51.64	2.4G	-48.83	2.4G	-49.58	2.52158G	-50.28	15.21429G	-43.00	1
2.43958G	13.72	-16.28	2.30641G	-49.61	2.39696G	-49.04	2.4G	-46.82	2.50206G	-50.42	23.39293G	-42.10	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX


CSEndB

2462MHz

21/03/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

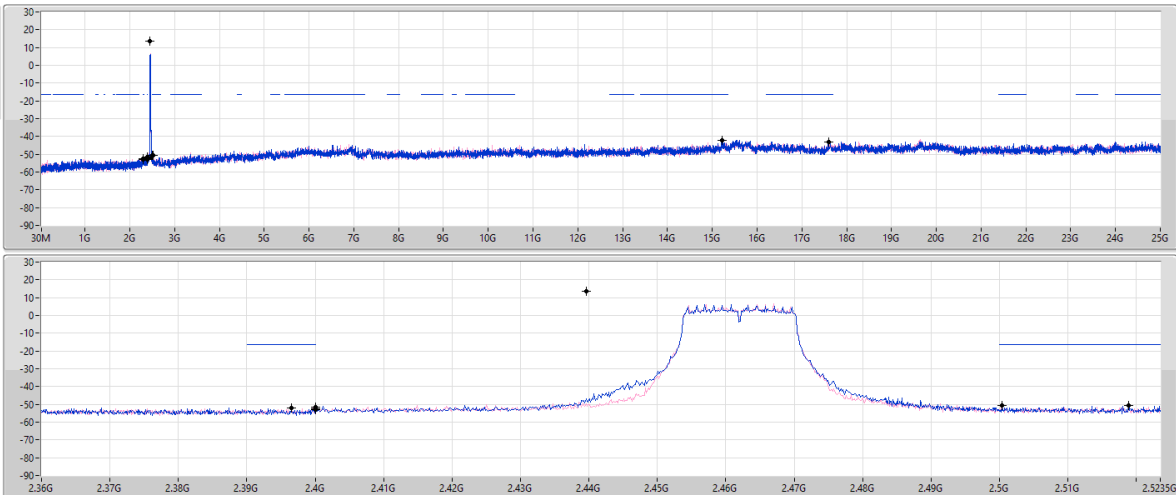


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43958G	13.72	-16.28	2.30175G	-53.08	2.4G	-52.52	2.4G	-51.41	2.51886G	-50.64	15.21148G	-42.38	1
2.43958G	13.72	-16.28	2.30525G	-52.47	2.39659G	-52.20	2.4G	-53.03	2.50038G	-50.66	17.59961G	-43.28	2

2.4-2.4835GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

CSEndB

2412MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

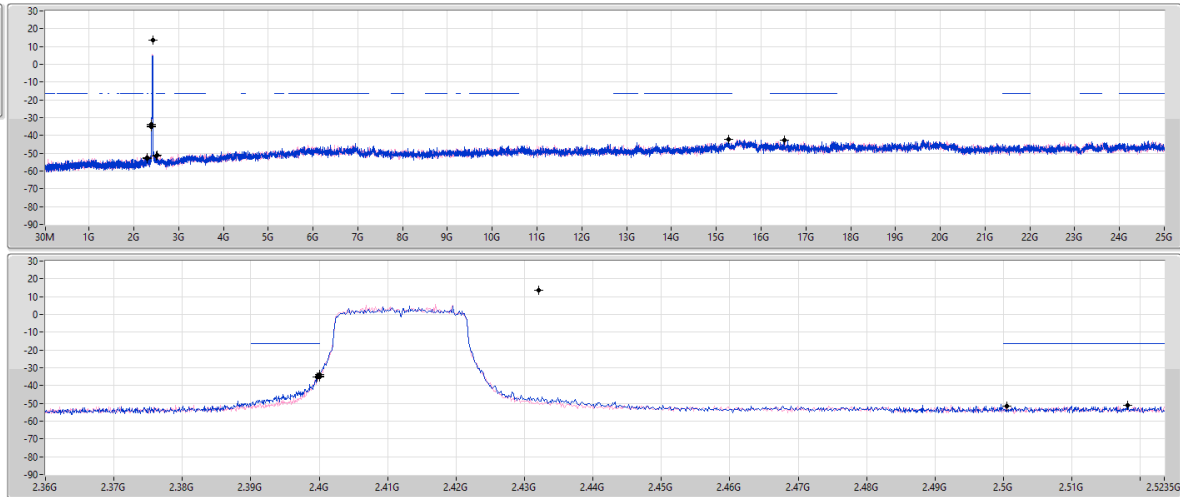


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43206G	13.43	-16.57	2.30641G	-52.99	2.39968G	-34.98	2.4G	-35.23	2.51814G	-51.26	16.51512G	-42.56	1
2.43206G	13.43	-16.57	2.30408G	-52.65	2.4G	-33.97	2.4G	-34.60	2.50054G	-51.52	15.27329G	-42.37	2

2.4-2.4835GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

CSEndB

2437MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

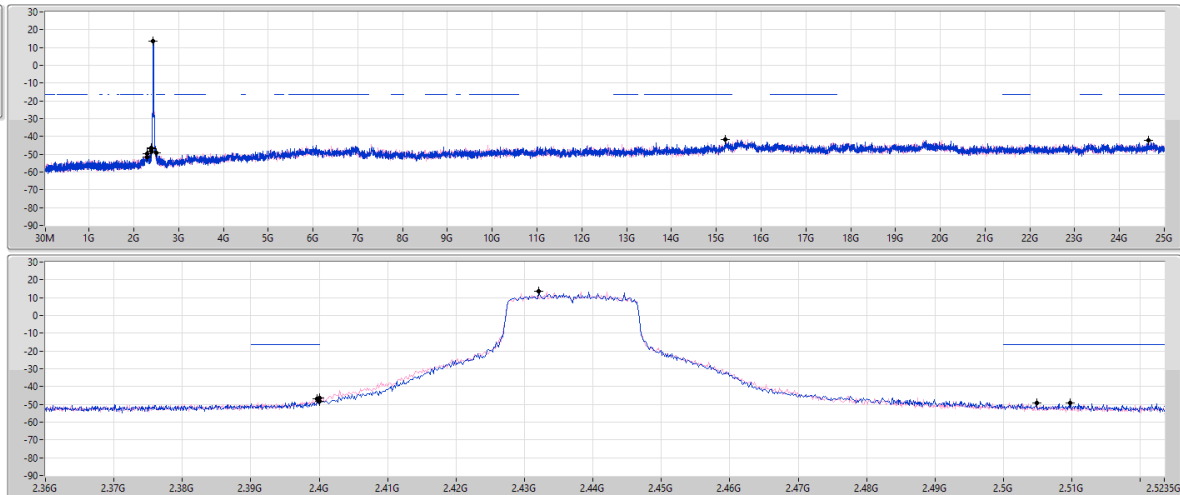


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43206G	13.43	-16.57	2.30292G	-51.33	2.4G	-46.34	2.4G	-48.45	2.50974G	-49.20	24.65161G	-42.08	1
2.43206G	13.43	-16.57	2.30099G	-49.77	2.39968G	-46.66	2.4G	-48.15	2.50486G	-49.18	15.20306G	-41.52	2

2.4-2.4835GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

CSEndB

2462MHz

21/03/2026

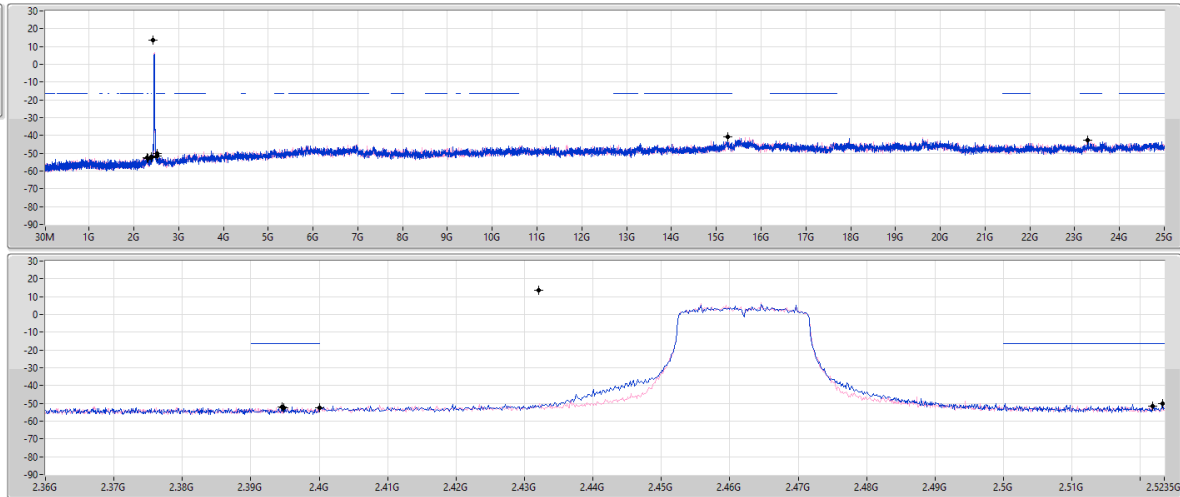RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43206G	13.43	-16.57	2.30991G	-53.09	2.39456G	-51.95	2.4G	-52.45	2.52326G	-50.13	15.25644G	-40.89	1
2.43206G	13.43	-16.57	2.30059G	-52.51	2.3948G	-52.28	2.4G	-52.54	2.52174G	-51.49	23.2946G	-42.86	2

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	2.43657G	18.02	-11.98	1.8008G	-52.65	2.4G	-36.08	2.4G	-35.48	2.50598G	-53.28	7.23514G	-43.76	1
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43741G	17.41	-12.59	48.64M	-52.48	2.39848G	-32.44	2.4G	-36.05	2.50422G	-52.25	21.57233G	-45.47	2
802.11b_Nss1,(1Mbps)_4TX	Pass	2.43758G	15.43	-14.57	2.0804G	-52.31	2.39856G	-37.75	2.4G	-39.27	2.50494G	-52.04	21.70438G	-45.49	4
802.11g_Nss1,(6Mbps)_1TX	Pass	2.44459G	15.26	-14.74	1.75071G	-51.93	2.4G	-25.15	2.4G	-23.42	2.51246G	-52.98	21.79429G	-44.85	1
802.11g_Nss1,(6Mbps)_2TX	Pass	2.44208G	15.22	-14.78	2.10953G	-51.77	2.39992G	-27.63	2.4G	-25.95	2.5139G	-53.64	21.61448G	-46.19	2
802.11g_Nss1,(6Mbps)_4TX	Pass	2.44459G	12.38	-17.62	1.71343G	-52.16	2.4G	-26.78	2.4G	-24.27	2.51086G	-52.80	7.00194G	-45.63	4
802.11be EHT20_Nss1,(MCS0)_1TX	Pass	2.44442G	15.33	-14.67	2.16894G	-52.22	2.39928G	-27.19	2.4G	-26.58	2.5147G	-53.10	21.59481G	-44.78	1
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	2.44192G	13.50	-16.50	2.14797G	-52.09	2.3996G	-24.93	2.4G	-28.62	2.51574G	-52.37	21.95162G	-45.92	2
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	2.44459G	12.01	-17.99	1.96973G	-52.37	2.39952G	-26.47	2.4G	-30.12	2.51038G	-52.23	21.94601G	-45.71	4

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43657G	18.02	-11.98	1.8008G	-52.65	2.4G	-36.08	2.4G	-35.48	2.50598G	-53.28	7.23514G	-43.76	1
2437MHz	Pass	2.43791G	18.23	-11.77	77.77M	-51.66	2.39904G	-43.56	2.4G	-47.08	2.50838G	-53.05	21.592G	-44.87	1
2462MHz	Pass	2.43657G	18.02	-11.98	2.11302G	-52.32	2.39536G	-46.73	2.4G	-46.35	2.51798G	-53.21	23.2075G	-45.56	1
802.11g_Nss1(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44459G	15.26	-14.74	1.75071G	-51.93	2.4G	-25.15	2.4G	-23.42	2.51246G	-52.98	21.79429G	-44.85	1
2437MHz	Pass	2.44459G	15.26	-14.74	2.05477G	-52.54	2.39952G	-35.04	2.4G	-37.04	2.51182G	-53.22	22.00501G	-45.33	1
2462MHz	Pass	2.44459G	15.26	-14.74	2.14914G	-52.27	2.3956G	-49.92	2.4G	-50.46	2.50854G	-52.52	21.98534G	-45.42	1
802.11be EHT20_Nss1(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44442G	15.33	-14.67	2.16894G	-52.22	2.39928G	-27.19	2.4G	-26.58	2.5147G	-53.10	21.59481G	-44.78	1
2437MHz	Pass	2.44442G	15.33	-14.67	1.89633G	-52.08	2.39952G	-28.45	2.4G	-32.81	2.51614G	-53.43	21.54424G	-46.35	1
2462MHz	Pass	2.44442G	15.33	-14.67	1.90915G	-52.01	2.396G	-49.96	2.4G	-52.29	2.52286G	-51.87	21.64257G	-45.33	1
802.11b_Nss1(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43741G	17.41	-12.59	2.30991G	-52.62	2.4G	-37.49	2.4G	-37.02	2.52054G	-52.59	7.23514G	-44.59	1
2412MHz	Pass	2.43741G	17.41	-12.59	48.64M	-52.48	2.39848G	-32.44	2.4G	-36.05	2.50422G	-52.25	21.57233G	-45.47	2
2437MHz	Pass	2.43741G	17.41	-12.59	75.44M	-52.42	2.39704G	-42.88	2.4G	-46.32	2.51726G	-52.61	21.87858G	-44.89	1
2437MHz	Pass	2.43741G	17.41	-12.59	60.29M	-52.62	2.398G	-42.24	2.4G	-47.61	2.50438G	-51.43	21.65943G	-45.36	2
2462MHz	Pass	2.43741G	17.41	-12.59	2.15147G	-52.26	2.39984G	-48.46	2.4G	-48.96	2.50798G	-52.68	21.54705G	-45.45	1
2462MHz	Pass	2.43741G	17.41	-12.59	2.14681G	-52.25	2.392G	-48.86	2.4G	-51.09	2.50814G	-53.18	21.58357G	-45.54	2
802.11g_Nss1(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44208G	15.22	-14.78	2.04312G	-52.53	2.4G	-27.28	2.4G	-26.88	2.51102G	-51.74	21.61448G	-45.51	1
2412MHz	Pass	2.44208G	15.22	-14.78	2.10953G	-51.77	2.39992G	-27.63	2.4G	-25.95	2.5139G	-53.64	21.61448G	-46.19	2
2437MHz	Pass	2.44208G	15.22	-14.78	2.09671G	-52.42	2.39952G	-33.98	2.4G	-34.65	2.50174G	-53.10	21.72686G	-45.46	1
2437MHz	Pass	2.44208G	15.22	-14.78	2.07924G	-52.34	2.39824G	-33.35	2.4G	-35.02	2.5159G	-52.70	6.97385G	-44.91	2
2462MHz	Pass	2.44208G	15.22	-14.78	89.42M	-52.46	2.39432G	-50.37	2.4G	-50.46	2.5199G	-53.30	21.64538G	-43.39	1
2462MHz	Pass	2.44208G	15.22	-14.78	1.80197G	-52.53	2.39736G	-50.86	2.4G	-52.52	2.50182G	-53.16	21.54986G	-45.38	2
802.11be EHT20_Nss1(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44192G	13.50	-16.50	1.81245G	-52.13	2.39984G	-28.30	2.4G	-27.68	2.5179G	-52.60	21.64538G	-45.58	1
2412MHz	Pass	2.44192G	13.50	-16.50	2.14797G	-52.09	2.3996G	-24.93	2.4G	-28.62	2.51574G	-52.37	21.95162G	-45.92	2
2437MHz	Pass	2.44192G	13.50	-16.50	2.13982G	-52.56	2.39992G	-42.10	2.4G	-44.06	2.51526G	-52.22	21.55267G	-45.72	1
2437MHz	Pass	2.44192G	13.50	-16.50	1.84041G	-52.12	2.39768G	-42.92	2.4G	-44.93	2.50998G	-52.47	21.72124G	-45.33	2
2462MHz	Pass	2.44192G	13.50	-16.50	47.48M	-52.52	2.3952G	-50.43	2.4G	-52.82	2.5159G	-52.48	21.53581G	-44.99	1
2462MHz	Pass	2.44192G	13.50	-16.50	1.81711G	-52.17	2.39792G	-52.37	2.4G	-54.47	2.51966G	-52.57	21.87015G	-45.27	2
802.11b_Nss1(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43758G	15.43	-14.57	2.1305G	-51.94	2.39984G	-39.58	2.4G	-40.31	2.50254G	-52.20	21.51614G	-44.96	1
2412MHz	Pass	2.43758G	15.43	-14.57	82.43M	-52.58	2.4G	-40.23	2.4G	-39.70	2.51782G	-52.63	21.54705G	-44.35	2
2412MHz	Pass	2.43758G	15.43	-14.57	1.72974G	-53.00	2.4G	-40.21	2.4G	-40.65	2.52086G	-52.24	23.19345G	-45.17	3
2412MHz	Pass	2.43758G	15.43	-14.57	2.0804G	-52.31	2.39856G	-37.75	2.4G	-39.27	2.50494G	-52.04	21.70438G	-45.49	4
2437MHz	Pass	2.43758G	15.43	-14.57	2.04079G	-51.93	2.39656G	-47.03	2.4G	-48.85	2.5139G	-52.39	21.64819G	-46.03	1
2437MHz	Pass	2.43758G	15.43	-14.57	2.05477G	-52.48	2.39656G	-44.33	2.4G	-47.12	2.50094G	-52.86	21.45433G	-45.47	2
2437MHz	Pass	2.43758G	15.43	-14.57	2.18875G	-52.29	2.39752G	-47.76	2.4G	-49.14	2.50734G	-52.53	21.93758G	-45.83	3
2437MHz	Pass	2.43758G	15.43	-14.57	45.15M	-51.00	2.39808G	-47.75	2.4G	-50.69	2.52062G	-52.81	21.58919G	-45.39	4
2462MHz	Pass	2.43758G	15.43	-14.57	2.07108G	-52.31	2.39704G	-49.70	2.4G	-50.54	2.50414G	-52.05	21.99377G	-45.04	1
2462MHz	Pass	2.43758G	15.43	-14.57	1.90565G	-52.61	2.3988G	-49.96	2.4G	-52.25	2.50342G	-52.90	21.99939G	-45.27	2
2462MHz	Pass	2.43758G	15.43	-14.57	2.08856G	-52.07	2.39872G	-50.62	2.4G	-51.74	2.50254G	-52.51	21.62572G	-45.81	3
2462MHz	Pass	2.43758G	15.43	-14.57	97.57M	-52.74	2.39648G	-50.48	2.4G	-51.62	2.5159G	-53.33	21.77462G	-45.15	4
802.11g_Nss1(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44459G	12.38	-17.62	2.08506G	-51.59	2.4G	-26.99	2.4G	-26.33	2.50454G	-53.64	21.98534G	-45.15	1
2412MHz	Pass	2.44459G	12.38	-17.62	2.12467G	-51.88	2.4G	-26.98	2.4G	-26.17	2.51582G	-53.26	21.58357G	-45.50	2
2412MHz	Pass	2.44459G	12.38	-17.62	1.86604G	-51.45	2.39992G	-26.00	2.4G	-25.00	2.52246G	-53.62	21.59762G	-45.88	3
2412MHz	Pass	2.44459G	12.38	-17.62	1.71343G	-52.16	2.4G	-26.78	2.4G	-24.27	2.51086G	-52.80	7.00194G	-45.63	4
2437MHz	Pass	2.44459G	12.38	-17.62	41.65M	-52.07	2.39864G	-45.43	2.4G	-48.74	2.51678G	-52.96	21.93758G	-45.60	1
2437MHz	Pass	2.44459G	12.38	-17.62	1.94992G	-52.29	2.39712G	-46.92	2.4G	-48.96	2.5207G	-53.28	21.51333G	-44.90	2
2437MHz	Pass	2.44459G	12.38	-17.62	2.09205G	-52.22	2.39952G	-45.61	2.4G	-48.43	2.5227G	-53.24	21.95443G	-45.21	3
2437MHz	Pass	2.44459G	12.38	-17.62	2.08972G	-52.78	2.3992G	-41.73	2.4G	-41.92	2.51206G	-52.75	21.48243G	-44.67	4
2462MHz	Pass	2.44459G	12.38	-17.62	30M	-51.72	2.39392G	-52.50	2.4G	-54.10	2.50078G	-53.08	21.56391G	-44.89	1
2462MHz	Pass	2.44459G	12.38	-17.62	2.13399G	-52.09	2.39048G	-52.18	2.4G	-53.65	2.52326G	-52.25	21.66224G	-44.03	2
2462MHz	Pass	2.44459G	12.38	-17.62	2.17826G	-52.54	2.39912G	-50.72	2.4G	-54.05	2.51862G	-52.64	21.64538G	-45.64	3
2462MHz	Pass	2.44459G	12.38	-17.62	1.97672G	-52.09	2.3976G	-51.90	2.4G	-53.84	2.51286G	-52.65	21.96005G	-45.88	4
802.11be EHT20_Nss1(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44459G	12.01	-17.99	1.76119G	-52.18	2.39992G	-28.81	2.4G	-28.03	2.52302G	-52.41	6.92608G	-45.92	1



CSE (NdB Down)_Mode 2

Appendix E.2

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2412MHz	Pass	2.44459G	12.01	-17.99	2.18292G	-52.18	2.39952G	-29.72	2.4G	-28.16	2.51142G	-53.06	21.66786G	-44.61	2
2412MHz	Pass	2.44459G	12.01	-17.99	2.02681G	-52.60	2.39992G	-29.18	2.4G	-27.80	2.50094G	-53.30	21.45995G	-44.85	3
2412MHz	Pass	2.44459G	12.01	-17.99	1.96973G	-52.37	2.39952G	-26.47	2.4G	-30.12	2.51038G	-52.23	21.94601G	-45.71	4
2437MHz	Pass	2.44459G	12.01	-17.99	196.6M	-52.24	2.39488G	-47.50	2.4G	-48.55	2.51662G	-53.49	21.46276G	-45.49	1
2437MHz	Pass	2.44459G	12.01	-17.99	52.14M	-52.43	2.3976G	-46.23	2.4G	-47.68	2.50958G	-52.67	21.60605G	-45.72	2
2437MHz	Pass	2.44459G	12.01	-17.99	1.85789G	-52.30	2.398G	-47.60	2.4G	-48.16	2.51662G	-52.69	23.20188G	-45.75	3
2437MHz	Pass	2.44459G	12.01	-17.99	2.18059G	-52.22	2.39936G	-42.75	2.4G	-44.77	2.51758G	-53.38	22.00501G	-45.67	4
2462MHz	Pass	2.44459G	12.01	-17.99	1.86604G	-52.83	2.39072G	-53.02	2.4G	-54.37	2.5119G	-52.80	23.17659G	-45.05	1
2462MHz	Pass	2.44459G	12.01	-17.99	34.66M	-52.48	2.3964G	-53.02	2.4G	-55.10	2.50318G	-52.53	21.99658G	-45.19	2
2462MHz	Pass	2.44459G	12.01	-17.99	2.01633G	-53.01	2.39488G	-52.56	2.4G	-54.24	2.50062G	-53.05	21.48243G	-44.73	3
2462MHz	Pass	2.44459G	12.01	-17.99	1.81362G	-52.24	2.39616G	-52.86	2.4G	-54.39	2.50486G	-52.86	21.89262G	-45.99	4


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB

2412MHz

16/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

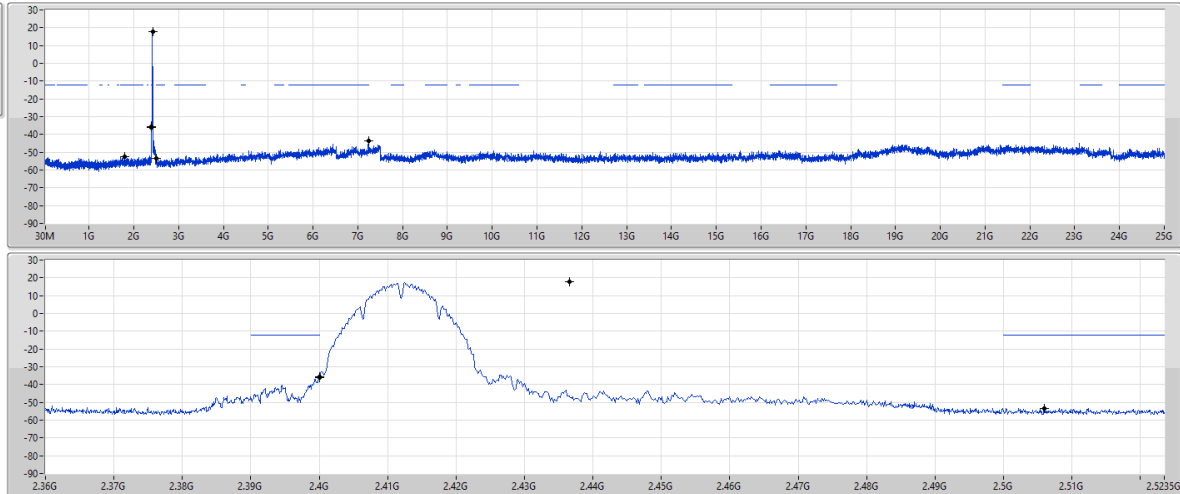

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43657G	18.02	-11.98	1.8008G	-52.65	2.4G	-36.08	2.4G	-35.48	2.50598G	-53.28	7.23514G	-43.76	1


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

CSEndB

2437MHz

16/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

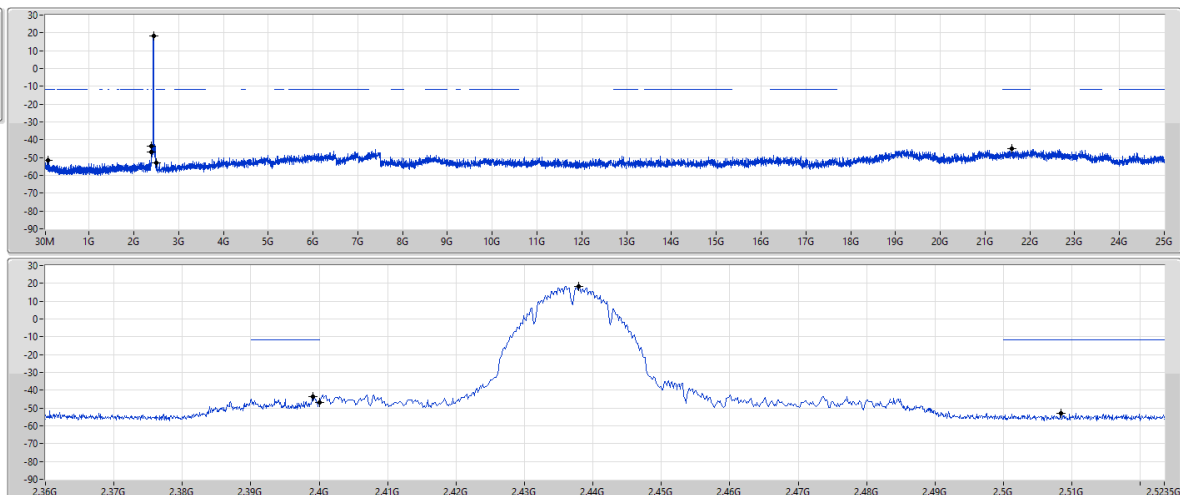

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43791G	18.23	-11.77	77.77M	-51.66	2.39904G	-43.36	2.4G	-47.08	2.50838G	-53.05	21.592G	-44.87	1

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX


CSEndB

2462MHz

16/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1

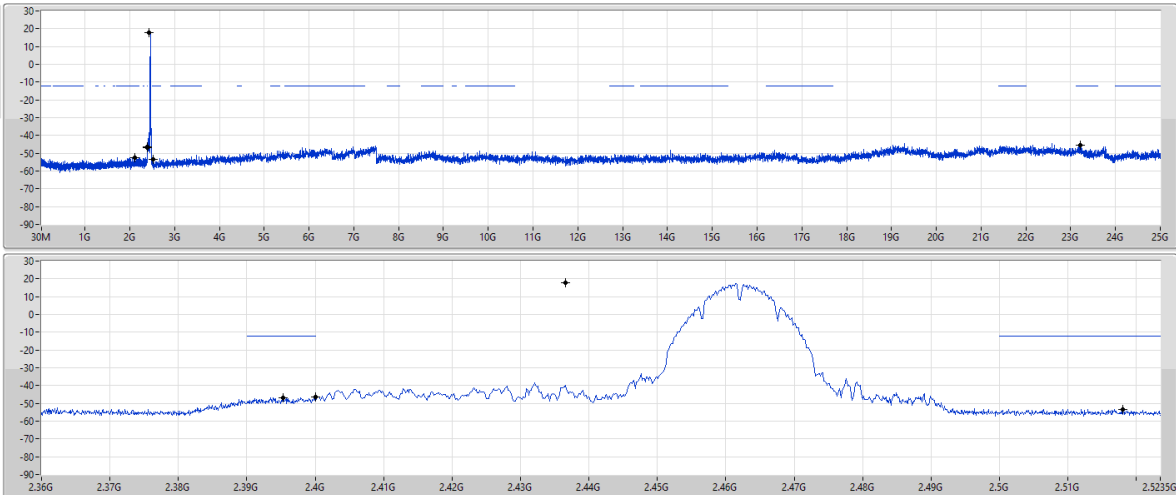

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43657G	18.02	-11.98	2.11302G	-52.32	2.39536G	-46.73	2.4G	-46.35	2.51798G	-53.21	23.2075G	-45.56	1

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX


CSEndB

2412MHz

17/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1

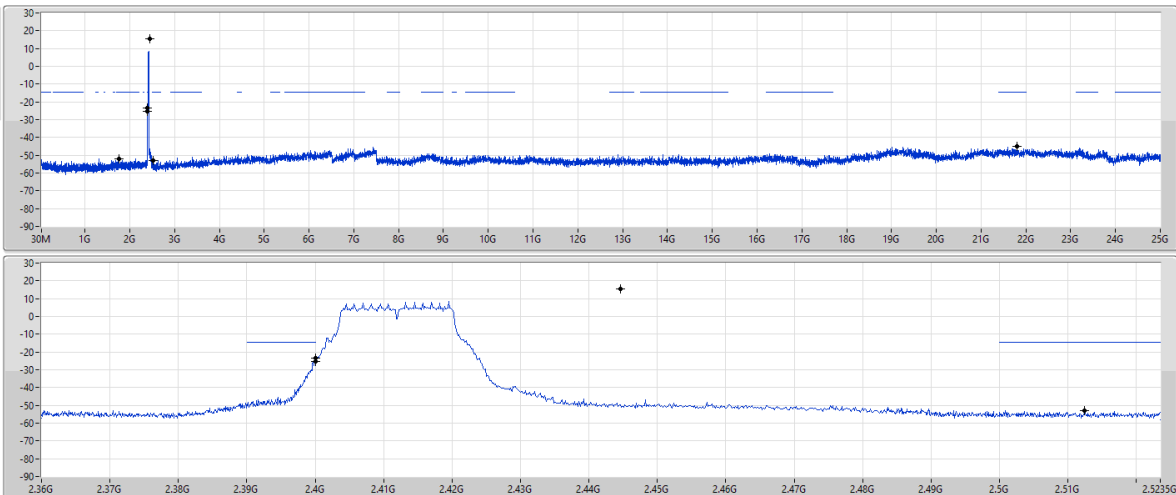


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44459G	15.26	-14.74	1.75071G	-51.93	2.4G	-25.15	2.4G	-23.42	2.51246G	-52.98	21.79429G	-44.85	1

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB

2437MHz

17/02/2026

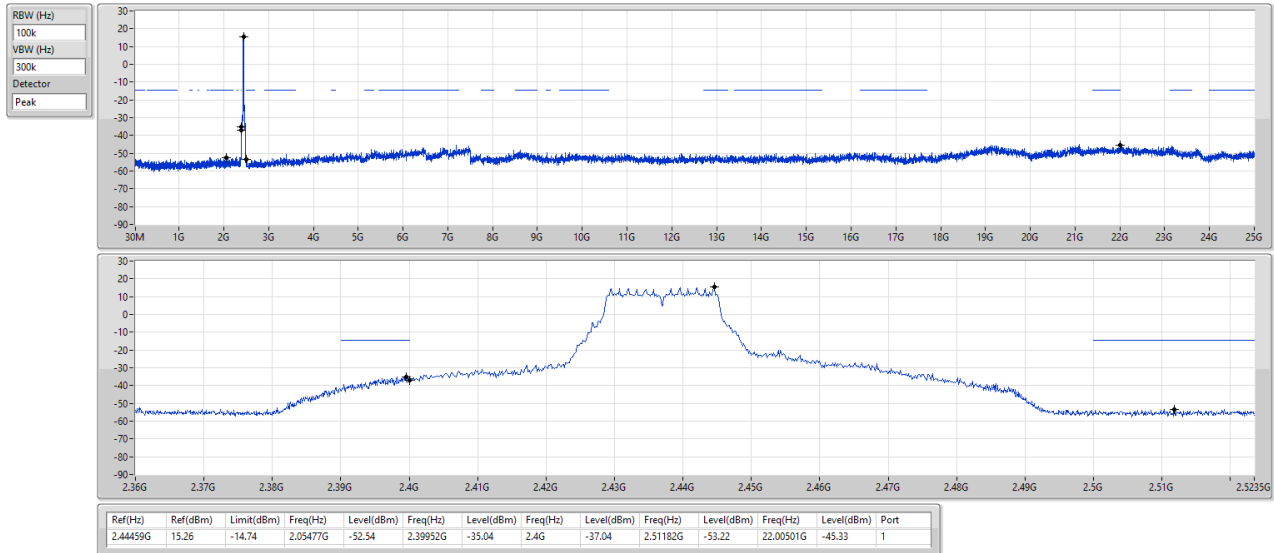


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

CSEndB

2462MHz


17/02/2026

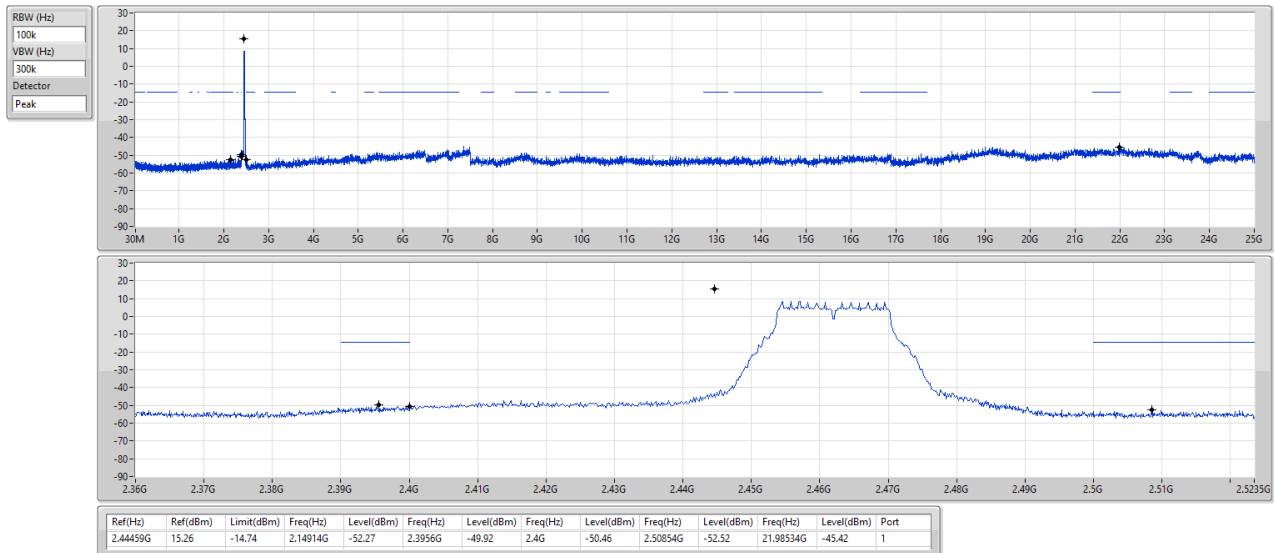

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSEndB


2412MHz

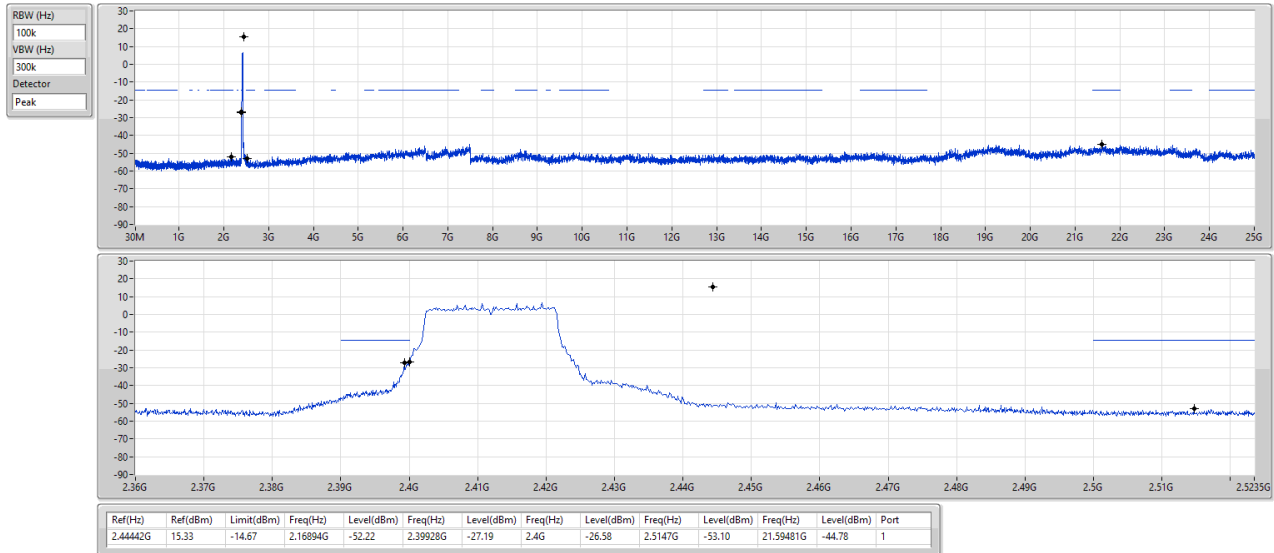

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSEndB

2437MHz

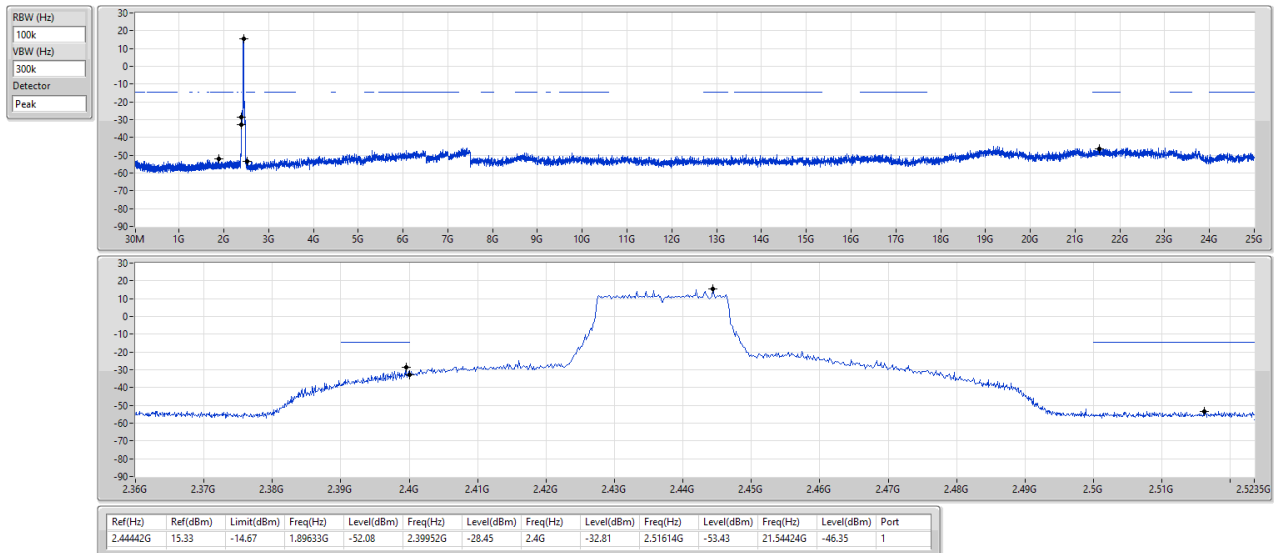


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSEndB

2462MHz

17/02/2026

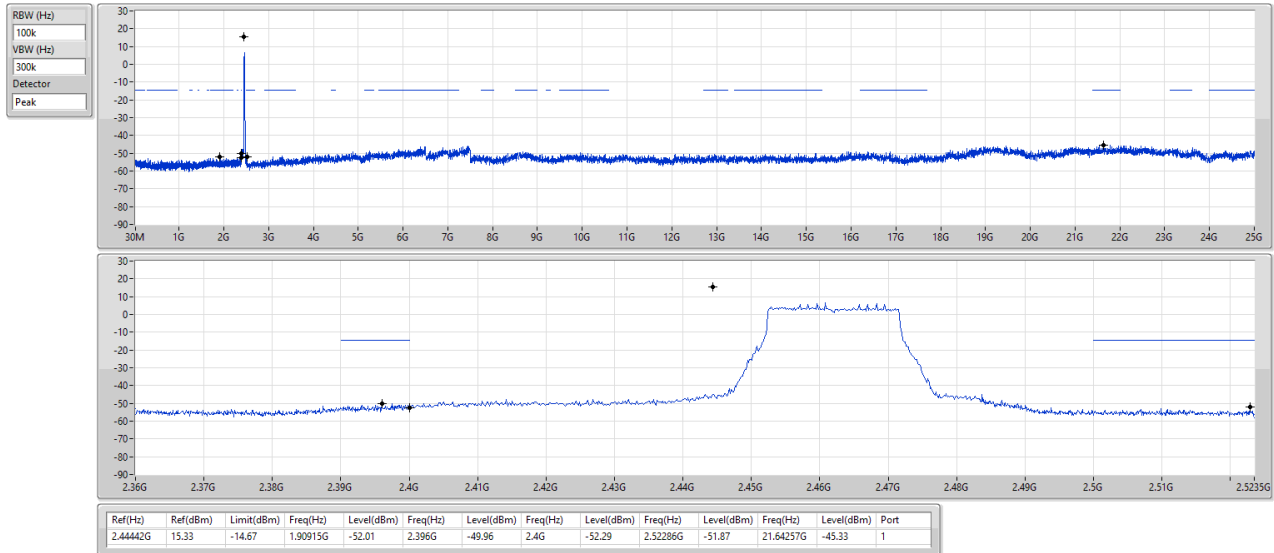


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

CSEndB

2412MHz

16/02/2026

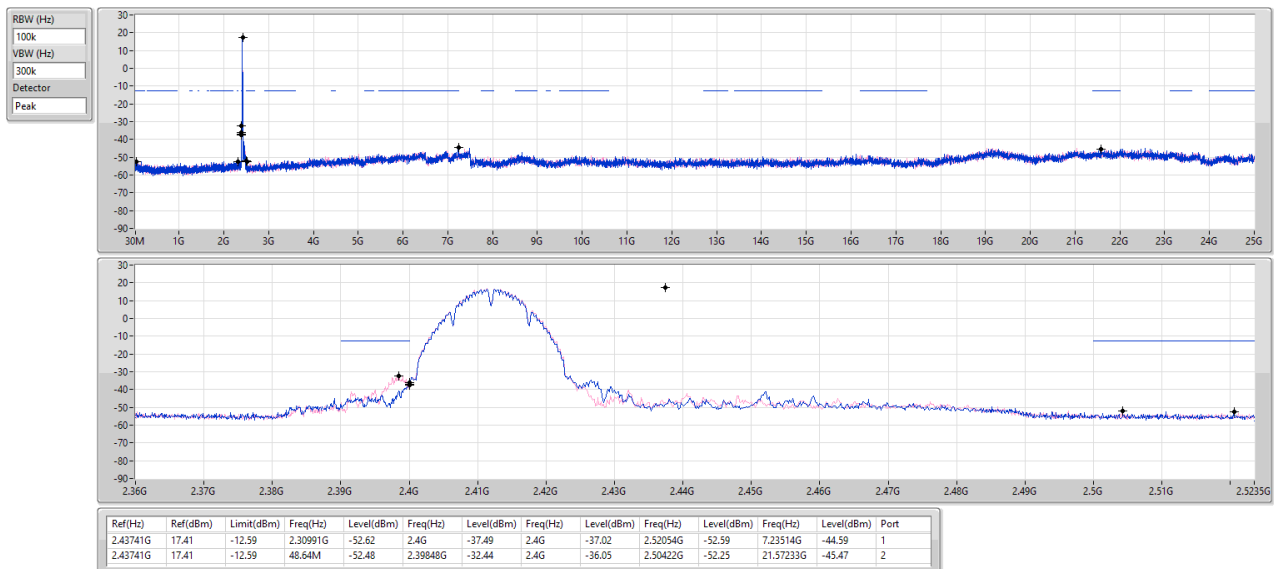

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX


CSEndB

2437MHz

16/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

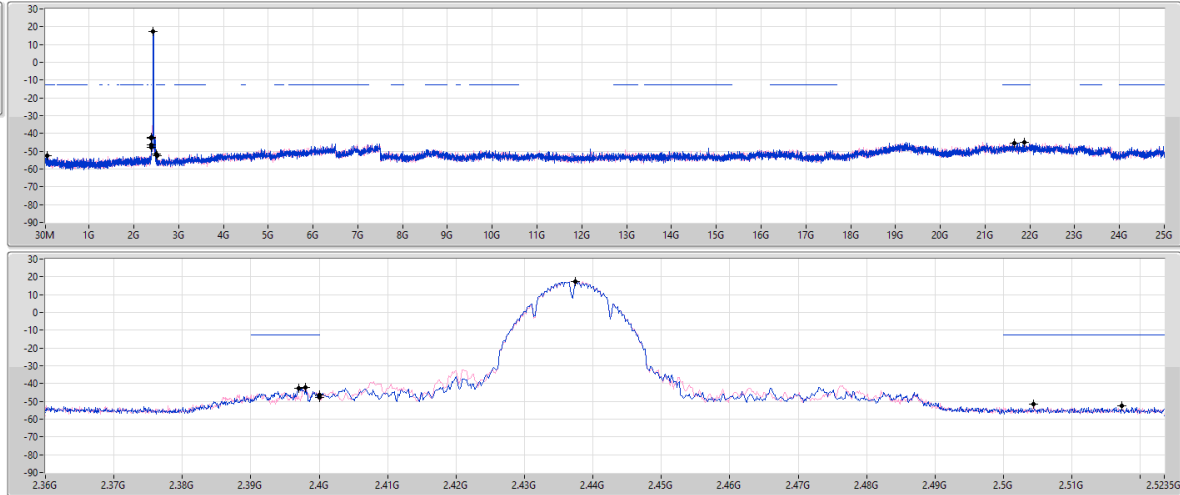

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	17.41	-12.59	75.44M	-52.42	2.39704G	-42.88	2.4G	-46.32	2.51726G	-52.61	21.87859G	-44.89	1
2.43741G	17.41	-12.59	60.29M	-52.62	2.398G	-42.24	2.4G	-47.61	2.50438G	-51.43	21.65943G	-45.36	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX


CSEndB

2462MHz

16/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

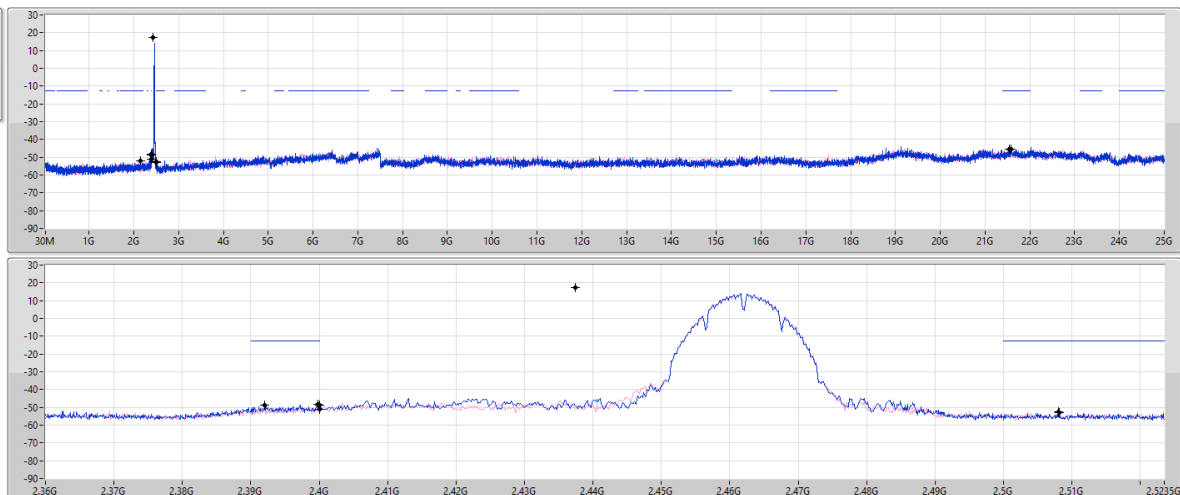


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	17.41	-12.59	2.15147G	-52.26	2.39984G	-48.46	2.4G	-48.96	2.50798G	-52.68	21.54705G	-45.45	1
2.43741G	17.41	-12.59	2.14681G	-52.25	2.392G	-48.86	2.4G	-51.09	2.50814G	-53.18	21.58357G	-45.54	2

2.4-2.4835GHz_802.11g_(6Mbps)_2TX

CSEndB

2412MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

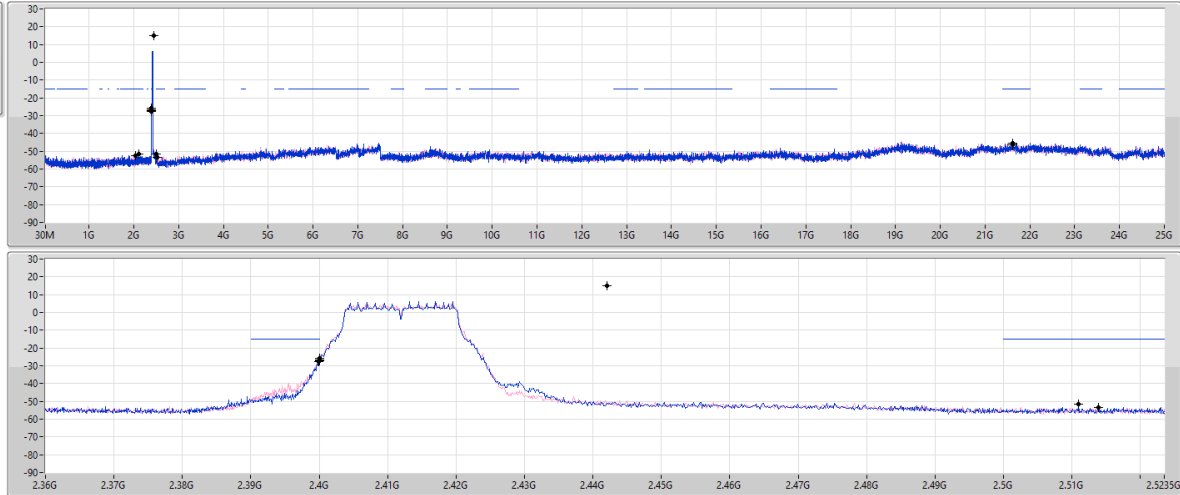


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	15.22	-14.78	2.04312G	-52.53	2.4G	-27.28	2.4G	-26.88	2.51102G	-51.74	21.61448G	-45.51	1
2.44208G	15.22	-14.78	2.10953G	-51.77	2.39992G	-27.63	2.4G	-25.95	2.5199G	-53.64	21.61448G	-46.19	2

2.4-2.4835GHz_802.11g_(6Mbps)_2TX

CSEndB

2437MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

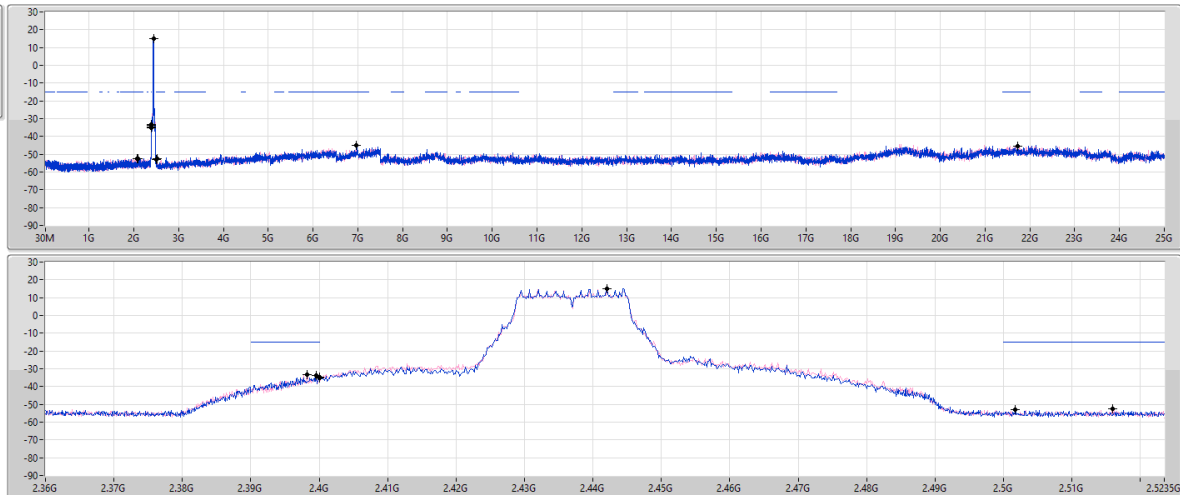

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	15.22	-14.78	2.09671G	-52.42	2.39952G	-33.98	2.4G	-34.65	2.50174G	-53.10	21.72886G	-45.46	1
2.44208G	15.22	-14.78	2.07924G	-52.34	2.39824G	-33.35	2.4G	-35.02	2.5199G	-52.70	6.97385G	-44.91	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX


CSEndB

2462MHz

17/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

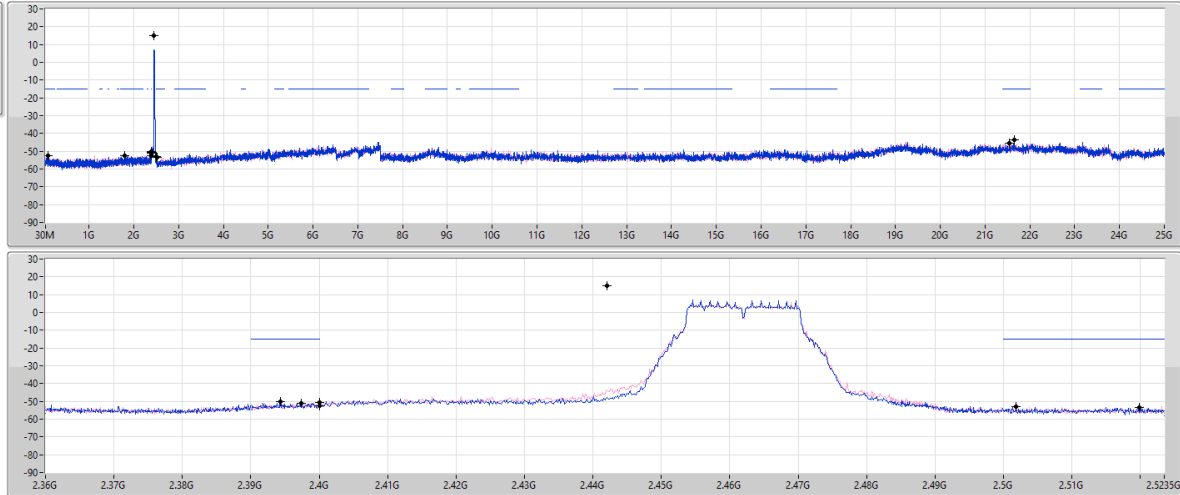

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	15.22	-14.78	89.42M	-52.46	2.39432G	-50.37	2.4G	-50.46	2.5199G	-53.30	21.64538G	-43.39	1
2.44208G	15.22	-14.78	1.80197G	-52.53	2.39736G	-50.86	2.4G	-52.52	2.50182G	-53.16	21.54986G	-45.38	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX


CSEndB

2412MHz

17/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1
Port 2

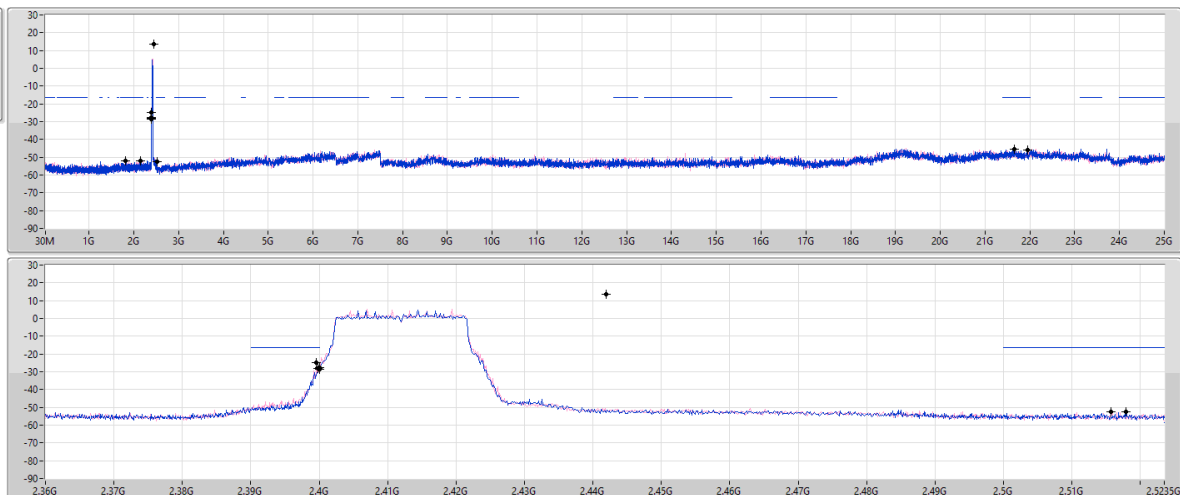


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	13.50	-16.50	1.81245G	-52.13	2.39984G	-28.30	2.4G	-27.88	2.5179G	-52.60	21.64538G	-45.58	1
2.44192G	13.50	-16.50	2.14797G	-52.09	2.3996G	-24.93	2.4G	-28.62	2.51574G	-52.37	21.95162G	-45.92	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSEndB

2437MHz

17/02/2026

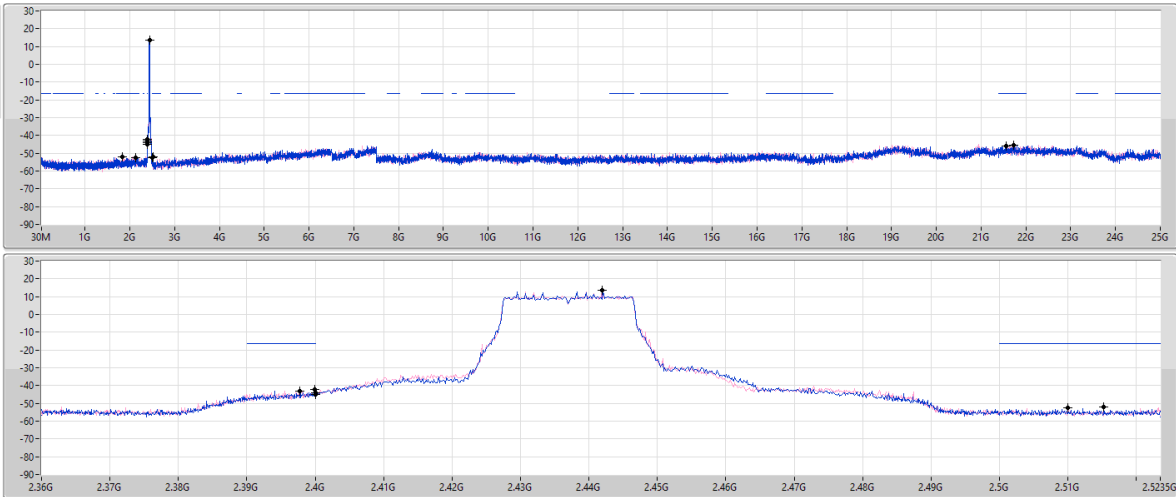RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	13.50	-16.50	2.13982G	-52.56	2.39992G	-42.10	2.4G	-44.06	2.51526G	-52.22	2.155267G	-45.72	1
2.44192G	13.50	-16.50	1.84041G	-52.12	2.39768G	-42.92	2.4G	-44.93	2.50998G	-52.47	2.172124G	-45.33	2

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSEndB

2462MHz

17/02/2026

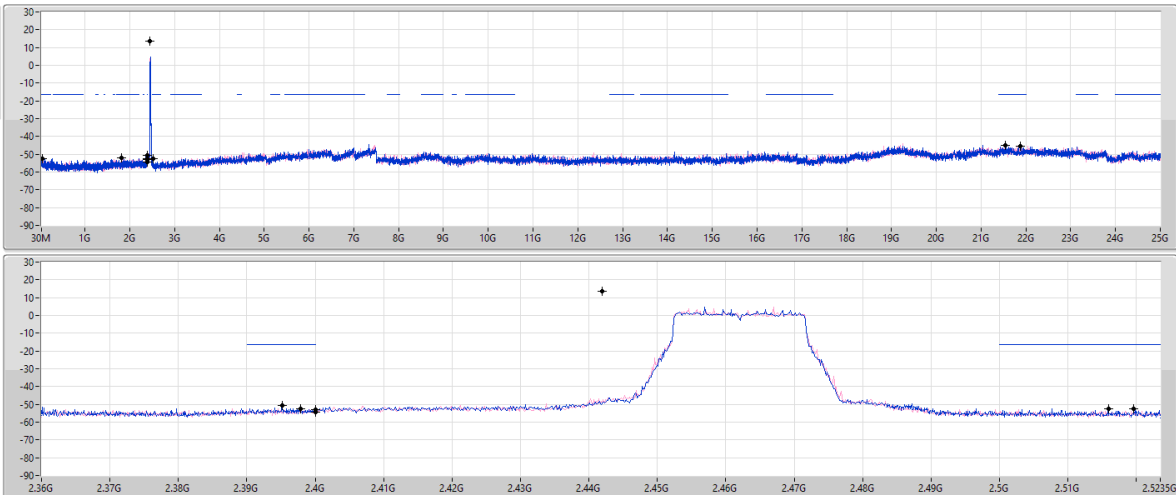RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	13.50	-16.50	47.48M	-52.52	2.3952G	-50.43	2.4G	-52.82	2.5159G	-52.48	2.153581G	-44.99	1
2.44192G	13.50	-16.50	1.81711G	-52.17	2.39792G	-52.37	2.4G	-54.47	2.51966G	-52.57	2.187015G	-45.27	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSendB

2412MHz

16/02/2026

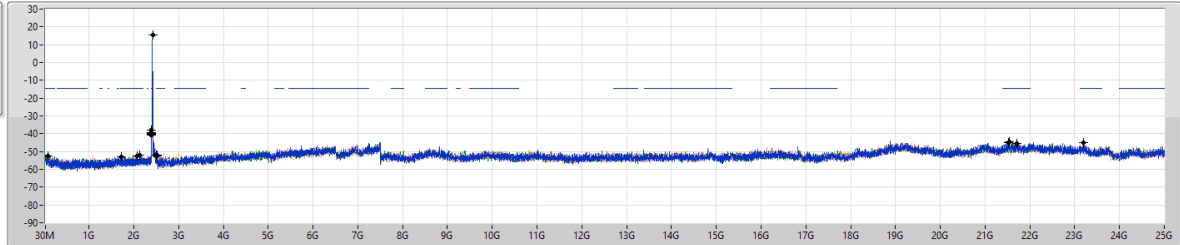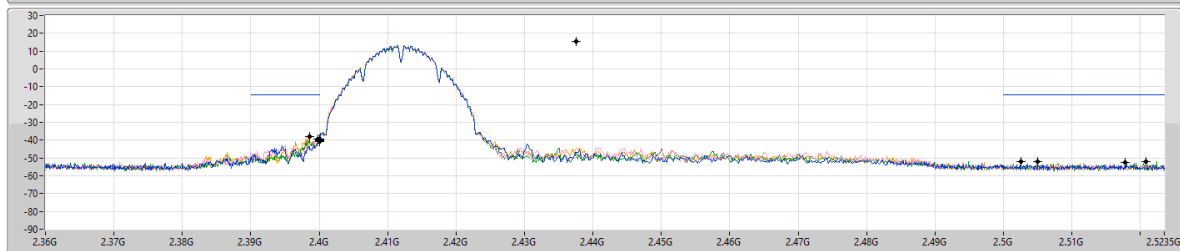RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43758G	15.43	-14.57	2.1305G	-51.94	2.39984G	-39.58	2.4G	-40.31	2.50254G	-52.20	2.51614G	-44.96	1
2.43758G	15.43	-14.57	82.43M	-52.58	2.4G	-40.23	2.4G	-39.70	2.51782G	-52.63	2.54705G	-44.35	2
2.43758G	15.43	-14.57	1.72974G	-53.00	2.4G	-40.21	2.4G	-40.65	2.52086G	-52.24	2.519345G	-45.17	3
2.43758G	15.43	-14.57	2.0804G	-52.31	2.39656G	-37.75	2.4G	-39.27	2.50494G	-52.04	2.170438G	-45.49	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSendB

2437MHz

16/02/2026

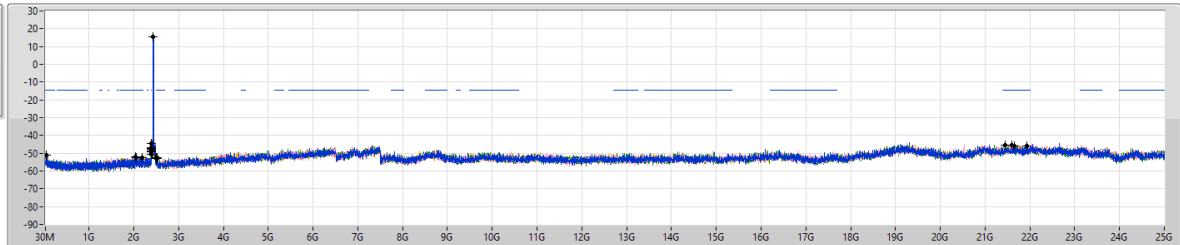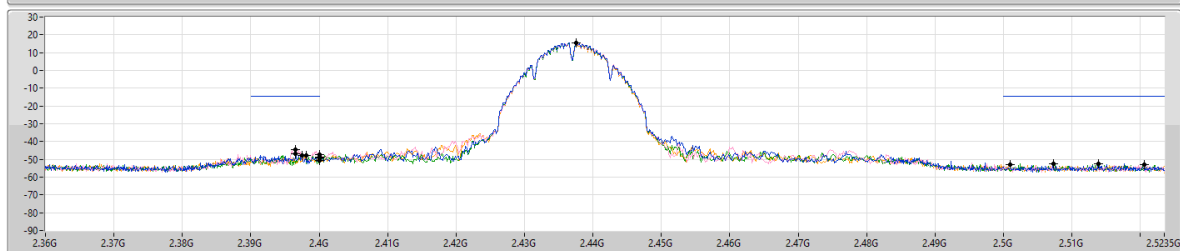RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43758G	15.43	-14.57	2.04079G	-51.93	2.39656G	-47.03	2.4G	-48.85	2.5139G	-52.39	2.164819G	-46.03	1
2.43758G	15.43	-14.57	2.05477G	-52.48	2.39656G	-44.33	2.4G	-47.12	2.50094G	-52.86	2.145433G	-45.47	2
2.43758G	15.43	-14.57	2.18875G	-52.29	2.39752G	-47.76	2.4G	-49.14	2.50734G	-52.53	2.193758G	-45.83	3
2.43758G	15.43	-14.57	45.13M	-51.00	2.39808G	-47.75	2.4G	-50.69	2.52062G	-52.81	2.158919G	-45.39	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2462MHz

17/02/2026

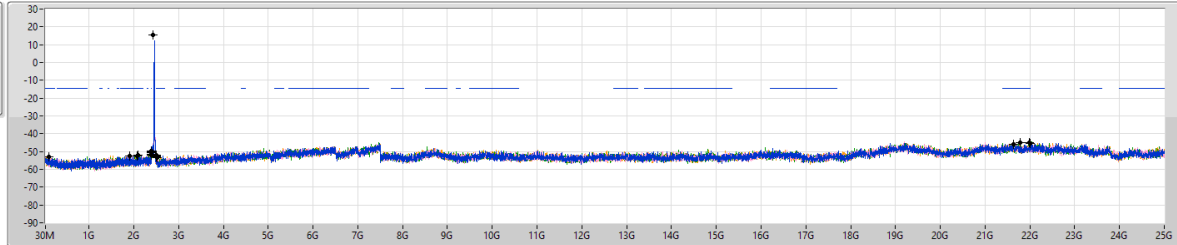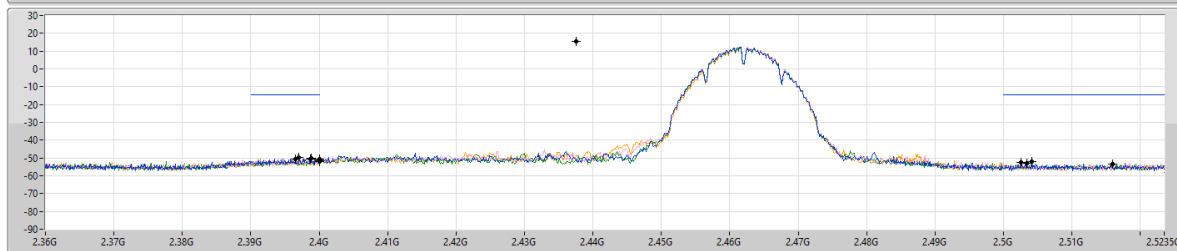RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43758G	15.43	-14.57	2.07108G	-52.31	2.39704G	-49.70	2.4G	-50.54	2.50414G	-52.05	21.99377G	-45.04	1
2.43758G	15.43	-14.57	1.90565G	-52.61	2.3988G	-49.96	2.4G	-52.25	2.50342G	-52.90	21.99939G	-45.27	2
2.43758G	15.43	-14.57	2.08856G	-52.07	2.39872G	-50.62	2.4G	-51.74	2.50254G	-52.51	21.62572G	-45.81	3
2.43758G	15.43	-14.57	97.57M	-52.74	2.39648G	-50.48	2.4G	-51.62	2.5159G	-53.33	21.77462G	-45.15	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2412MHz

17/02/2026

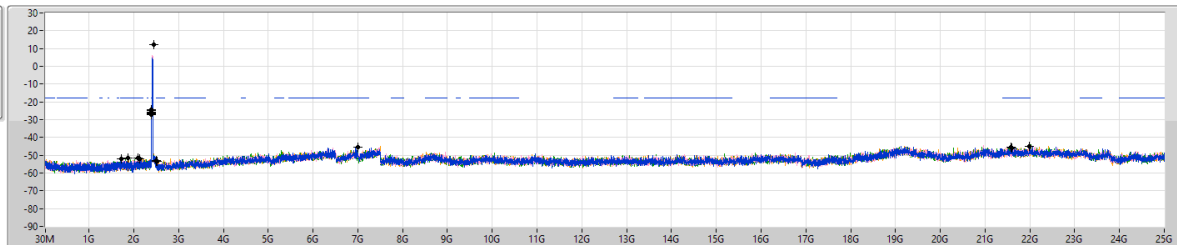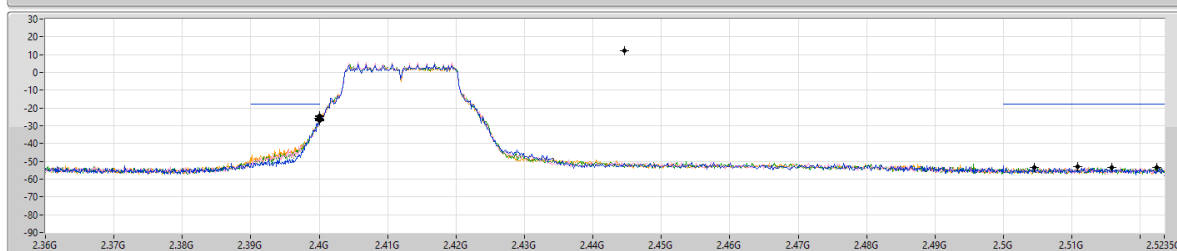RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44439G	12.38	-17.62	2.08506G	-51.59	2.4G	-26.99	2.4G	-26.33	2.50454G	-53.64	21.98534G	-45.15	1
2.44439G	12.38	-17.62	2.12467G	-51.88	2.4G	-26.98	2.4G	-26.17	2.51582G	-53.26	21.58357G	-45.50	2
2.44439G	12.38	-17.62	1.88604G	-51.45	2.39992G	-26.00	2.4G	-25.00	2.52246G	-53.62	21.59762G	-45.88	3
2.44439G	12.38	-17.62	1.71343G	-52.16	2.4G	-26.78	2.4G	-24.27	2.51086G	-52.80	7.00194G	-45.63	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2437MHz

17/02/2026

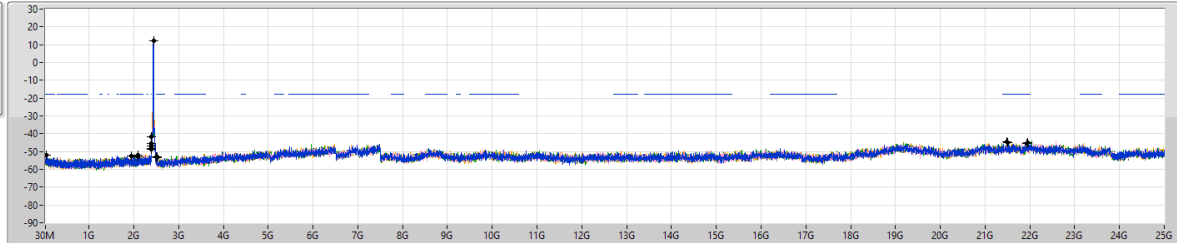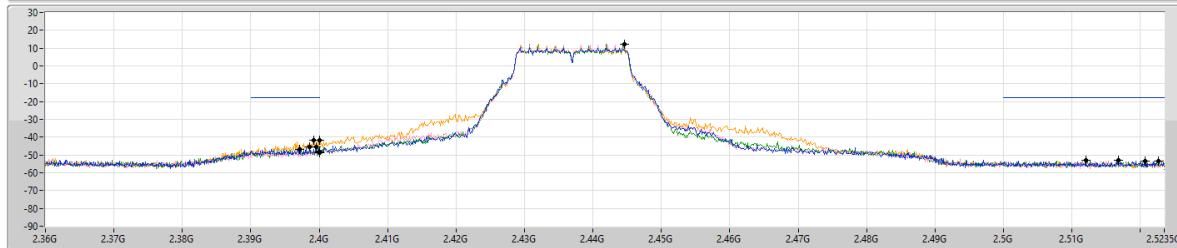RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44459G	12.38	-17.62	41.65M	-52.07	2.39864G	-45.43	2.4G	-48.74	2.51678G	-52.96	21.93758G	-45.60	1
2.44459G	12.38	-17.62	1.94992G	-52.29	2.39712G	-46.92	2.4G	-48.96	2.5207G	-53.28	21.51333G	-44.90	2
2.44459G	12.38	-17.62	2.09205G	-52.22	2.39952G	-45.61	2.4G	-48.43	2.5227G	-53.24	21.95443G	-45.21	3
2.44459G	12.38	-17.62	2.08972G	-52.78	2.3992G	-41.73	2.4G	-41.92	2.51206G	-52.75	21.48243G	-44.67	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2462MHz

17/02/2026

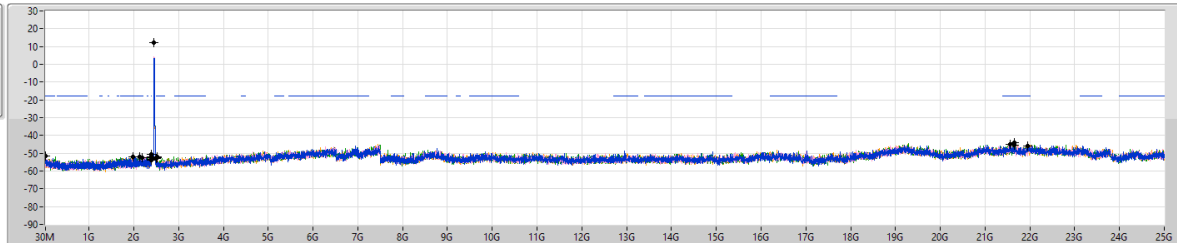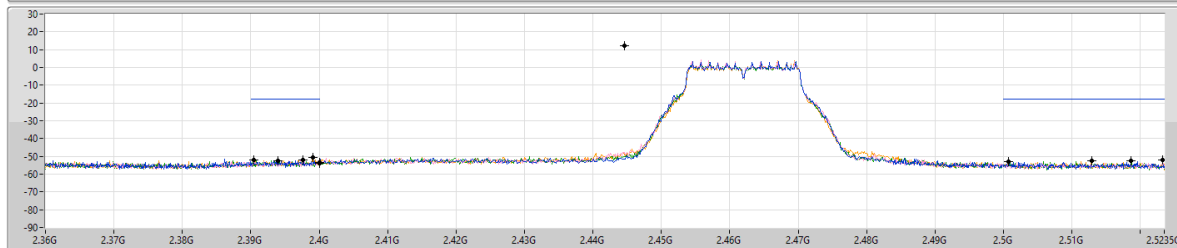RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44459G	12.38	-17.62	30M	-51.72	2.39392G	-52.50	2.4G	-54.10	2.50078G	-53.08	21.56391G	-44.89	1
2.44459G	12.38	-17.62	2.13399G	-52.09	2.39048G	-52.18	2.4G	-53.65	2.52326G	-52.25	21.66224G	-44.03	2
2.44459G	12.38	-17.62	2.17826G	-52.54	2.39912G	-50.72	2.4G	-54.05	2.51862G	-52.64	21.64538G	-45.64	3
2.44459G	12.38	-17.62	1.97872G	-52.09	2.3976G	-51.90	2.4G	-53.84	2.51286G	-52.65	21.98005G	-45.88	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSendB

2412MHz

17/02/2026

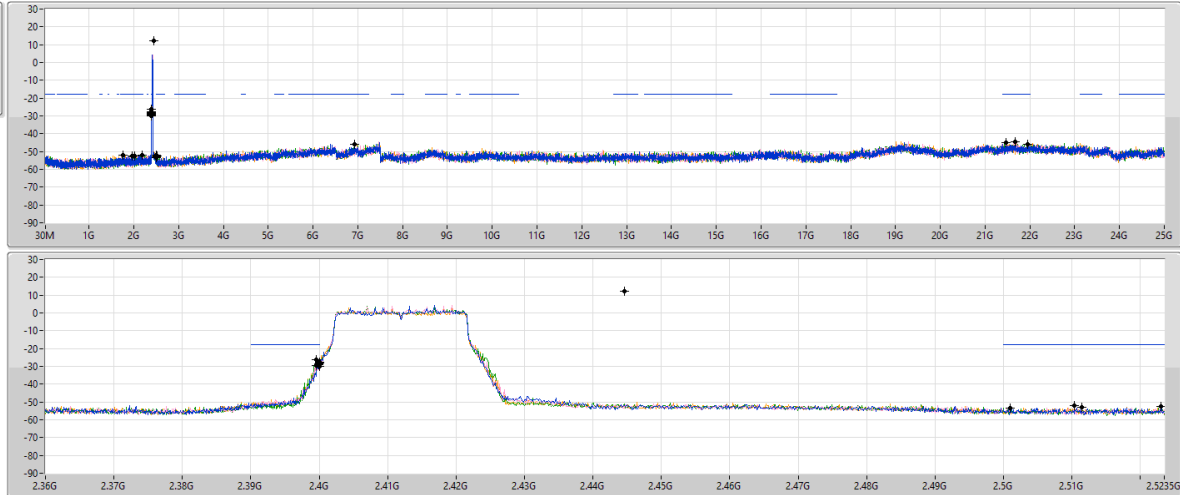RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44459G	12.01	-17.99	1.76119G	-52.18	2.39992G	-28.81	2.4G	-28.03	2.52302G	-52.41	6.92608G	-45.92	1
2.44459G	12.01	-17.99	2.18292G	-52.18	2.39952G	-29.72	2.4G	-28.16	2.51142G	-53.06	21.66786G	-44.61	2
2.44459G	12.01	-17.99	2.02681G	-52.60	2.39992G	-29.18	2.4G	-27.80	2.50094G	-53.30	21.45995G	-44.85	3
2.44459G	12.01	-17.99	1.96973G	-52.37	2.39952G	-26.47	2.4G	-30.12	2.51038G	-52.23	21.94601G	-45.71	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSendB

2437MHz

17/02/2026

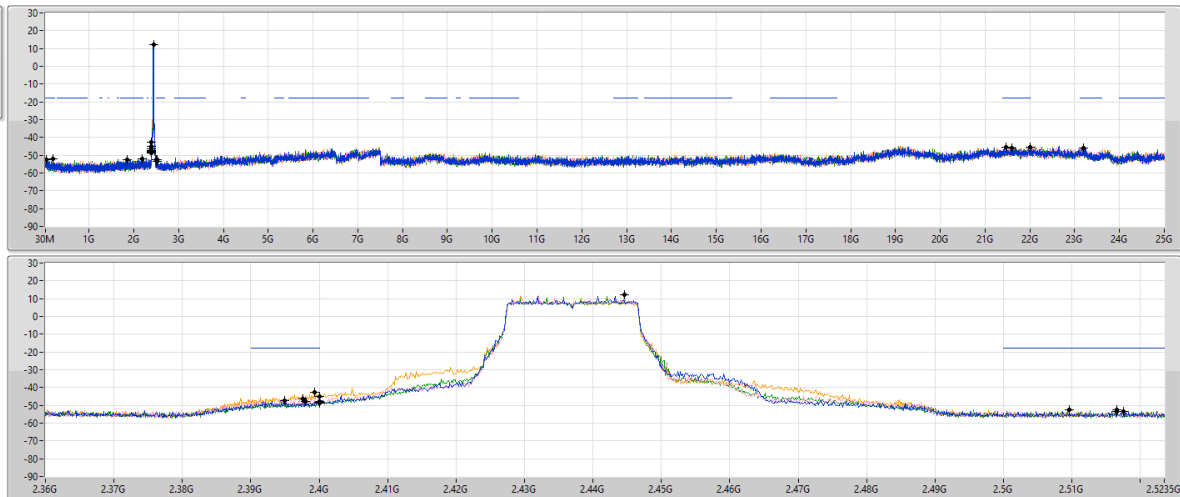RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44459G	12.01	-17.99	196.6M	-52.24	2.39488G	-47.50	2.4G	-48.55	2.51662G	-53.49	21.46276G	-45.49	1
2.44459G	12.01	-17.99	52.14M	-52.43	2.3976G	-46.23	2.4G	-47.88	2.50958G	-52.67	21.60605G	-45.72	2
2.44459G	12.01	-17.99	1.85789G	-52.30	2.398G	-47.60	2.4G	-48.16	2.51662G	-52.69	23.20188G	-45.75	3
2.44459G	12.01	-17.99	2.18059G	-52.22	2.39936G	-42.75	2.4G	-44.77	2.51758G	-53.38	22.00501G	-45.67	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSEndB

2462MHz

17/02/2026

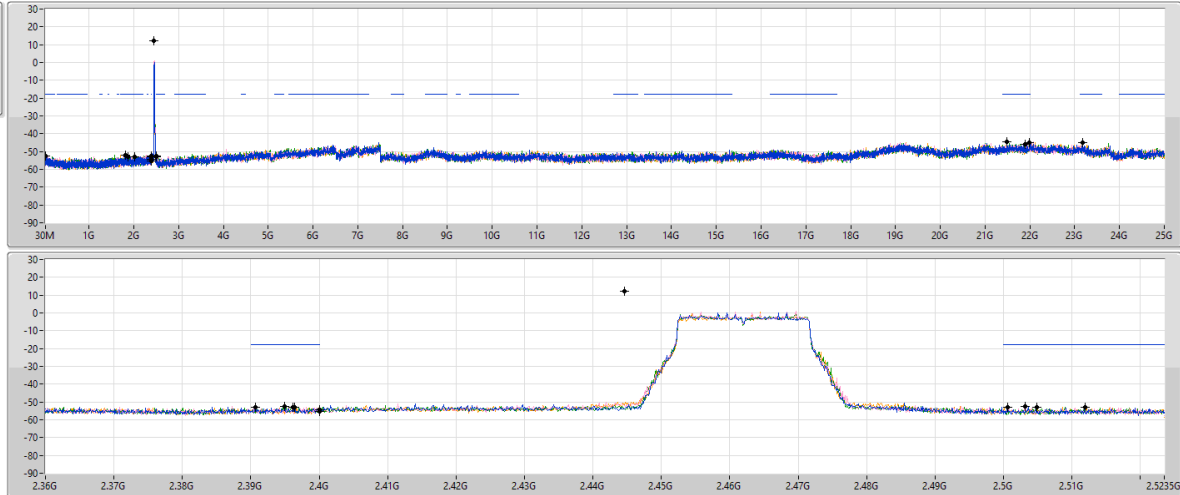RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44459G	12.01	-17.99	1.86604G	-52.83	2.39072G	-53.02	2.4G	-54.37	2.5119G	-52.80	23.17659G	-45.05	1
2.44459G	12.01	-17.99	34.66M	-52.48	2.3964G	-53.02	2.4G	-55.10	2.50318G	-52.53	21.99659G	-45.19	2
2.44459G	12.01	-17.99	2.01633G	-53.01	2.39488G	-52.56	2.4G	-54.24	2.50062G	-53.05	21.48343G	-44.73	3
2.44459G	12.01	-17.99	1.81362G	-52.24	2.39616G	-52.86	2.4G	-54.39	2.50486G	-52.86	21.89262G	-45.99	4




Radiated Emissions below 1GHz

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 10	Pass	PK	525.67M	41.94	46.00	-4.06	Vertical

Mode 10

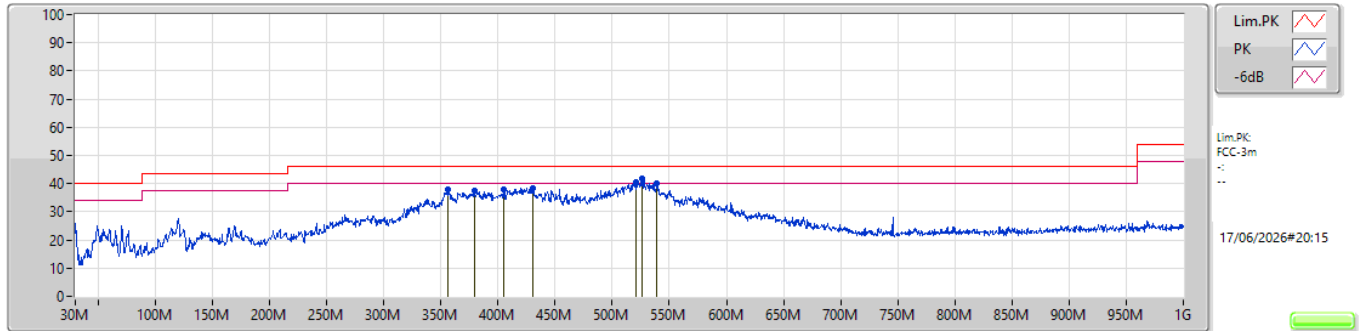

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	356.41M	37.76	46.00	-8.24	-31.26	3	Vertical	132	2.00	-	69.02	20.33	2.34	53.93		
PK	379.2M	37.53	46.00	-8.47	-30.33	3	Vertical	155	2.00	-	67.86	21.12	2.43	53.88		
PK	405.39M	37.83	46.00	-8.17	-29.54	3	Vertical	41	1.00	-	67.37	21.77	2.50	53.81		
PK	430.13M	38.41	46.00	-7.59	-28.70	3	Vertical	238	1.00	-	67.11	22.49	2.48	53.67		
PK	520.34M	40.67	46.00	-5.33	-26.39	3	Vertical	222	1.00	-	67.06	23.99	2.91	53.29		
PK	525.67M	41.94	46.00	-4.06	-26.27	3	Vertical	45	1.00	"Worst"	68.21	24.05	2.94	53.26		
PK	539.25M	40.30	46.00	-5.70	-25.96	3	Vertical	138	1.00	-	66.26	24.19	3.01	53.16		

Mode 10

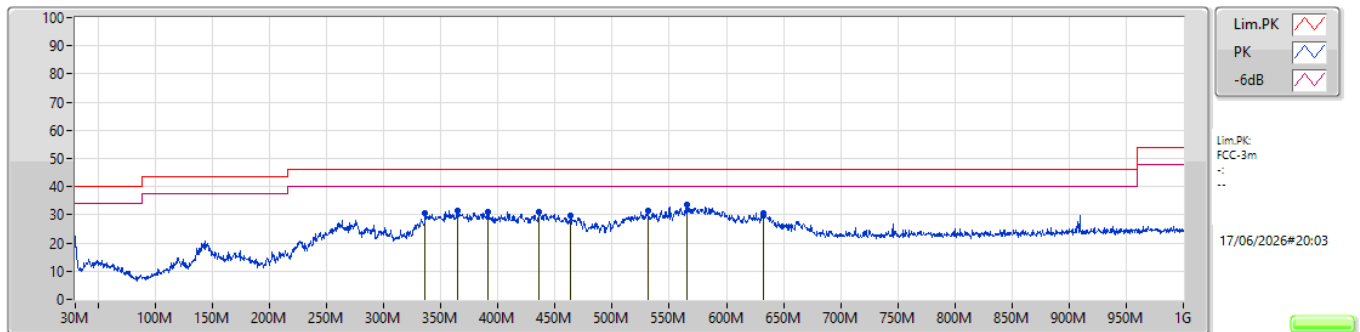

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	336.04M	30.41	46.00	-15.59	-31.40	3	Horizontal	89	3.00	-	61.81	20.18	2.28	53.86		
PK	365.14M	31.45	46.00	-14.55	-30.93	3	Horizontal	128	2.00	-	62.38	20.61	2.37	53.91		
PK	390.84M	31.05	46.00	-14.95	-29.93	3	Horizontal	77	2.00	-	60.98	21.46	2.47	53.86		
PK	435.95M	31.19	46.00	-14.81	-28.48	3	Horizontal	153	1.00	-	59.67	22.67	2.48	53.63		
PK	463.59M	29.56	46.00	-16.44	-27.81	3	Horizontal	92	1.00	-	57.37	23.15	2.56	53.52		
PK	531.01M	31.60	46.00	-14.40	-26.08	3	Horizontal	76	2.00	-	57.68	24.17	2.97	53.22		
PK	565.93M	33.57	46.00	-12.43	-25.18	3	Horizontal	149	2.00	"Worst"	58.75	24.70	3.17	53.05		
PK	632.37M	30.73	46.00	-15.27	-23.18	3	Horizontal	217	3.00	-	53.91	26.14	3.56	52.88		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	AV	2.4858G	53.93	54.00	-0.07	3	Horizontal	51	2.87	-
802.11g_Nss1,(6Mbps)_2TX	Pass	AV	2.4835G	53.86	54.00	-0.14	3	Horizontal	64	1.80	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	AV	2.4836G	53.94	54.00	-0.06	3	Horizontal	63	1.54	20

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

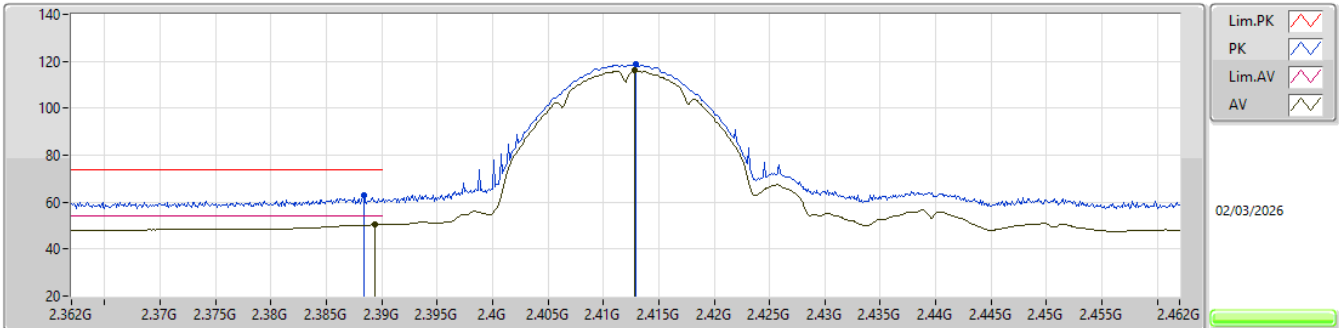


EUT V_2TX
Setting 26
04-W-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3884G	62.68	74.00	-11.32	29.47	3	Vertical	345	2.93	-	27.58	5.63	-				
AV	2.3894G	50.40	54.00	-3.60	17.18	3	Vertical	345	2.93	-	27.59	5.63	-				
PK	2.4129G	118.59	Inf	-Inf	85.44	3	Vertical	345	2.93	-	27.50	5.65	-				
AV	2.4128G	116.06	Inf	-Inf	82.91	3	Vertical	345	2.93	-	27.50	5.65	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

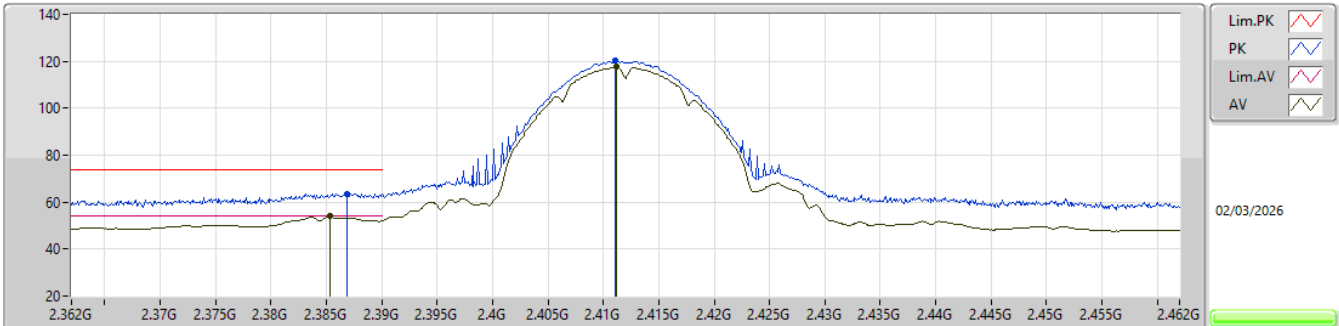


EUT_V_2TX
Setting 26
04-W-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3869G	63.64	74.00	-10.36	30.44	3	Horizontal	53	2.97	-	27.57	5.63	-				
AV	2.3853G	53.91	54.00	-0.09	20.73	3	Horizontal	53	2.97	-	27.55	5.63	-				
PK	2.4111G	120.09	Inf	-Inf	86.94	3	Horizontal	53	2.97	-	27.50	5.65	-				
AV	2.4112G	117.54	Inf	-Inf	84.39	3	Horizontal	53	2.97	-	27.50	5.65	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

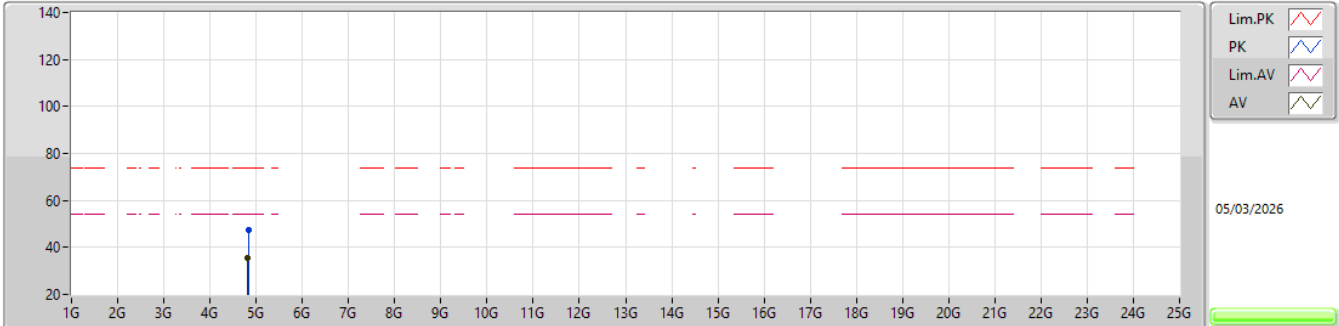


EUT Y_2TX
SET 26
05-X-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.8431G	47.37	74.00	-26.63	41.73	3	Vertical	323	2.70	26	32.64	8.18	35.18			
AV	4.82412G	35.50	54.00	-18.50	30.01	3	Vertical	323	2.70	26	32.49	8.18	35.18			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

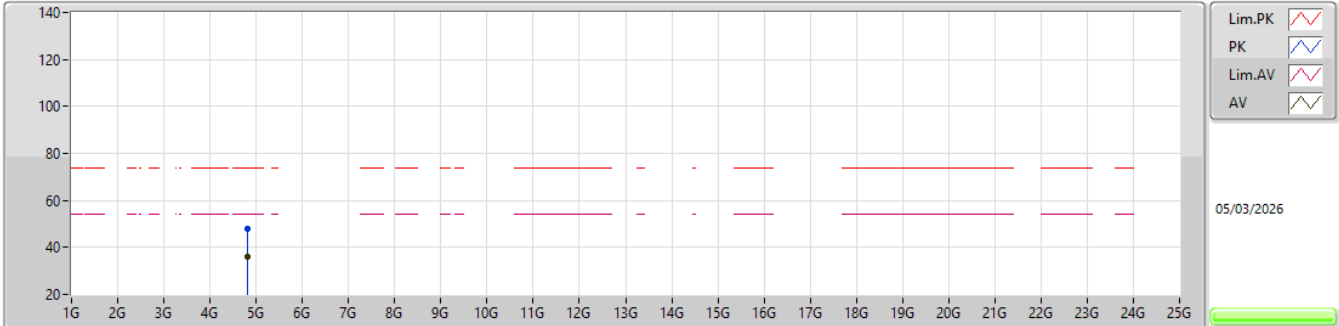


EUT_Y_2TX
SET 26
04-W-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.81992G	47.72	74.00	-26.28	42.26	3	Horizontal	344	1.80	26	32.46	8.18	35.18			
AV	4.82408G	36.28	54.00	-17.72	30.79	3	Horizontal	344	1.80	26	32.49	8.18	35.18			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2417MHz_TX

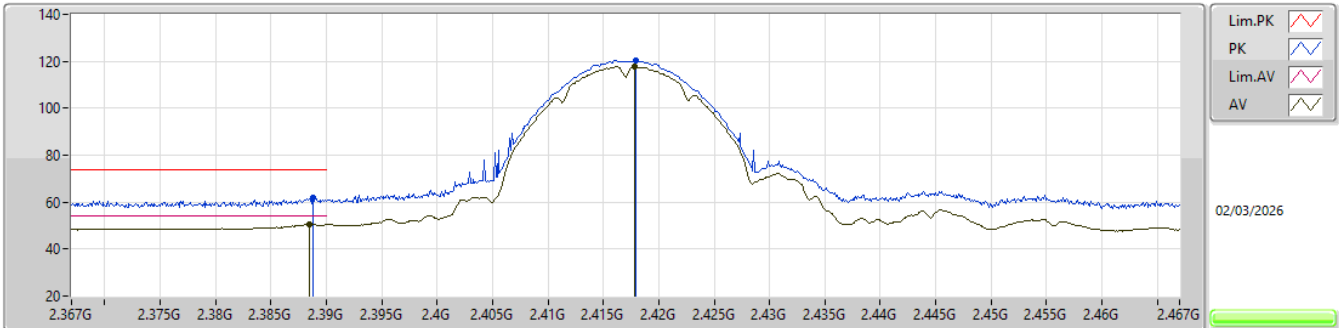


EUT_V_2TX
Setting 27.5
04-W-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3888G	61.84	74.00	-12.16	28.62	3	Vertical	346	2.93	-	27.59	5.63	-				
AV	2.3885G	50.71	54.00	-3.29	17.49	3	Vertical	346	2.93	-	27.59	5.63	-				
PK	2.4179G	120.28	Inf	-Inf	87.12	3	Vertical	346	2.93	-	27.50	5.66	-				
AV	2.4178G	117.85	Inf	-Inf	84.69	3	Vertical	346	2.93	-	27.50	5.66	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2417MHz_TX

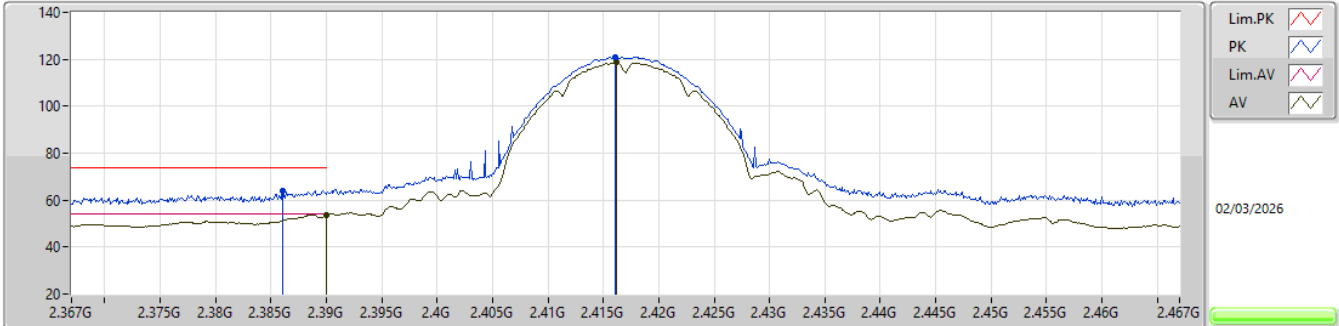


EUT_V_2TX
Setting 27.5
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3861G	64.06	74.00	-9.94	30.87	3	Horizontal	56	2.91	-	27.56	5.63	-			
AV	2.39G	53.85	54.00	-0.15	20.62	3	Horizontal	56	2.91	-	27.60	5.63	-			
PK	2.4161G	121.12	Inf	-Inf	87.97	3	Horizontal	56	2.91	-	27.50	5.65	-			
AV	2.4162G	118.62	Inf	-Inf	85.47	3	Horizontal	56	2.91	-	27.50	5.65	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

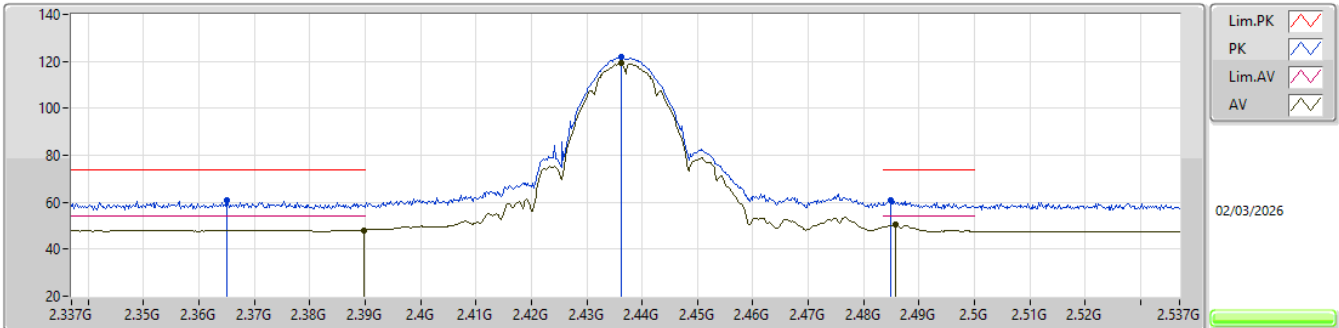


EUT_V_2TX
Setting 30
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.365G	61.11	74.00	-12.89	27.85	3	Vertical	347	2.89	-	27.65	5.61	-				
AV	2.3898G	48.17	54.00	-5.83	14.94	3	Vertical	347	2.89	-	27.60	5.63	-				
PK	2.4362G	121.65	Inf	-Inf	88.44	3	Vertical	347	2.89	-	27.54	5.67	-				
AV	2.4362G	119.13	Inf	-Inf	85.92	3	Vertical	347	2.89	-	27.54	5.67	-				
PK	2.4848G	60.96	74.00	-13.04	27.65	3	Vertical	347	2.89	-	27.60	5.71	-				
AV	2.4858G	50.33	54.00	-3.67	17.02	3	Vertical	347	2.89	-	27.60	5.71	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

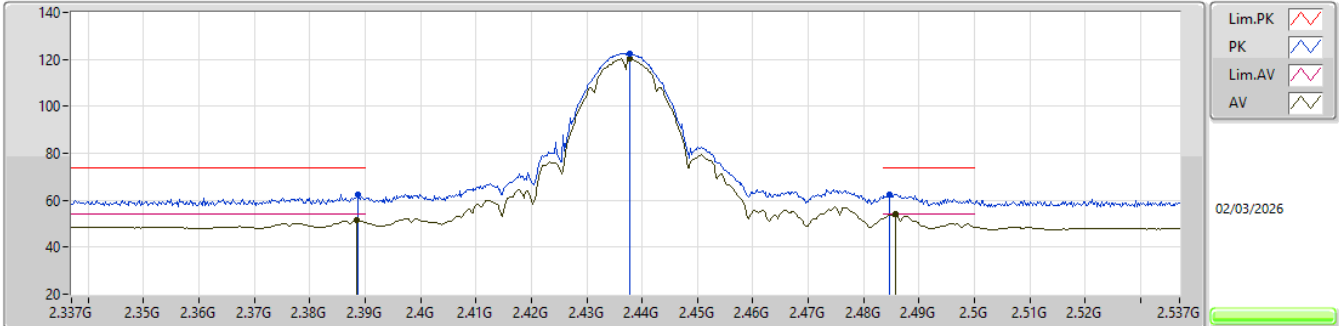


EUT_V_2TX
Setting 30
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3888G	62.51	74.00	-11.49	29.29	3	Horizontal	51	2.87	-	27.59	5.63	-				
AV	2.3884G	51.33	54.00	-2.67	18.12	3	Horizontal	51	2.87	-	27.58	5.63	-				
PK	2.4378G	122.65	Inf	-Inf	89.46	3	Horizontal	51	2.87	-	27.52	5.67	-				
AV	2.4378G	120.14	Inf	-Inf	86.95	3	Horizontal	51	2.87	-	27.52	5.67	-				
PK	2.4846G	62.50	74.00	-11.50	29.19	3	Horizontal	51	2.87	-	27.60	5.71	-				
AV	2.4858G	53.93	54.00	-0.07	20.62	3	Horizontal	51	2.87	-	27.60	5.71	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

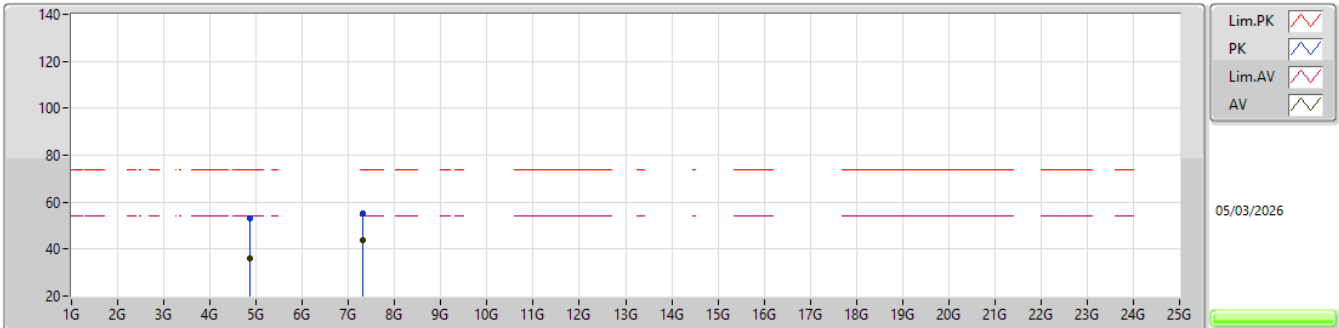


EUT Y_2TX
SET 30
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87404G	52.90	74.00	-21.10	47.09	3	Vertical	330	2.95	30	32.80	8.18	35.17				
AV	4.874G	36.13	54.00	-17.87	30.32	3	Vertical	330	2.95	30	32.80	8.18	35.17				
PK	7.31232G	55.19	74.00	-18.81	42.51	3	Vertical	338	1.80	30	37.08	9.69	34.09				
AV	7.31024G	43.97	54.00	-10.03	31.29	3	Vertical	338	1.80	30	37.08	9.69	34.09				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

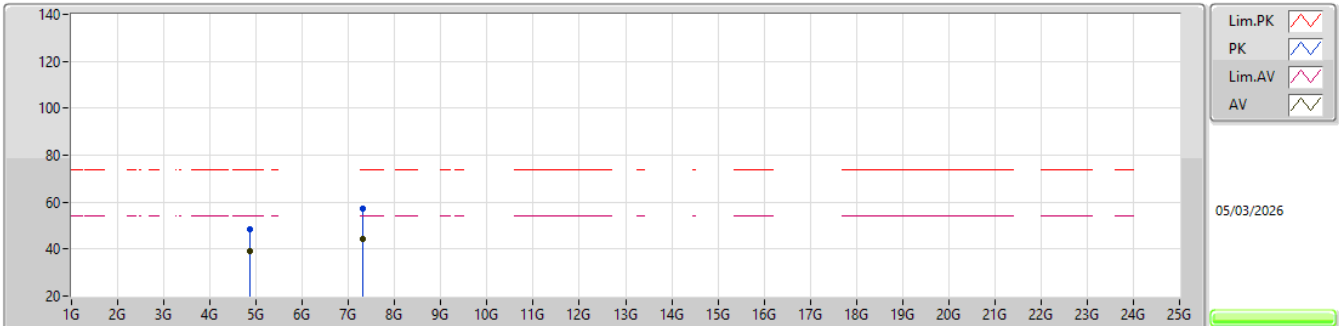


EUT Y_2TX
SET 30
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87412G	48.48	74.00	-25.52	42.67	3	Horizontal	63	2.81	30	32.80	8.18	35.17				
AV	4.874G	39.24	54.00	-14.76	33.43	3	Horizontal	63	2.81	30	32.80	8.18	35.17				
PK	7.31508G	57.17	74.00	-16.83	44.49	3	Horizontal	24	1.80	30	37.07	9.69	34.08				
AV	7.31176G	44.49	54.00	-9.51	31.81	3	Horizontal	24	1.80	30	37.08	9.69	34.09				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2457MHz_TX

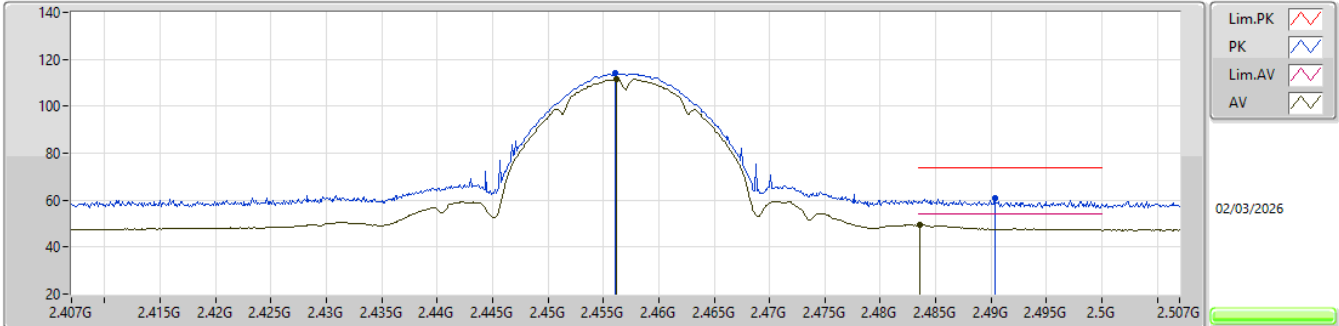


EUT_V_2TX
Setting 23
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4561G	113.99	Inf	-Inf	80.80	3	Vertical	-0	2.85	-	27.50	5.69	-			
AV	2.4562G	111.54	Inf	-Inf	78.35	3	Vertical	-0	2.85	-	27.50	5.69	-			
PK	2.4903G	60.79	74.00	-13.21	27.47	3	Vertical	-0	2.85	-	27.60	5.72	-			
AV	2.4836G	49.37	54.00	-4.63	16.06	3	Vertical	-0	2.85	-	27.60	5.71	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2457MHz_TX

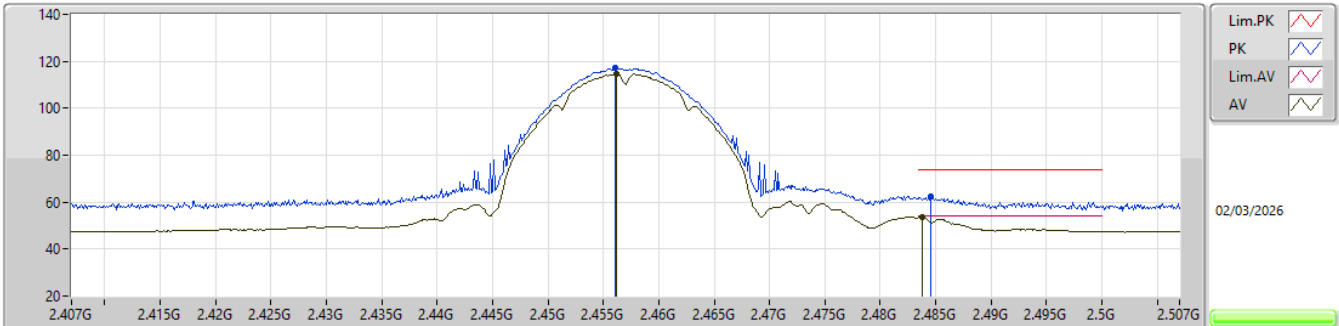


EUT_V_2TX
Setting 23
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4561G	117.01	Inf	-Inf	83.82	3	Horizontal	41	2.88	-	27.50	5.69	-				
AV	2.4562G	114.57	Inf	-Inf	81.38	3	Horizontal	41	2.88	-	27.50	5.69	-				
PK	2.4845G	62.37	74.00	-11.63	29.06	3	Horizontal	41	2.88	-	27.60	5.71	-				
AV	2.4838G	53.78	54.00	-0.22	20.47	3	Horizontal	41	2.88	-	27.60	5.71	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

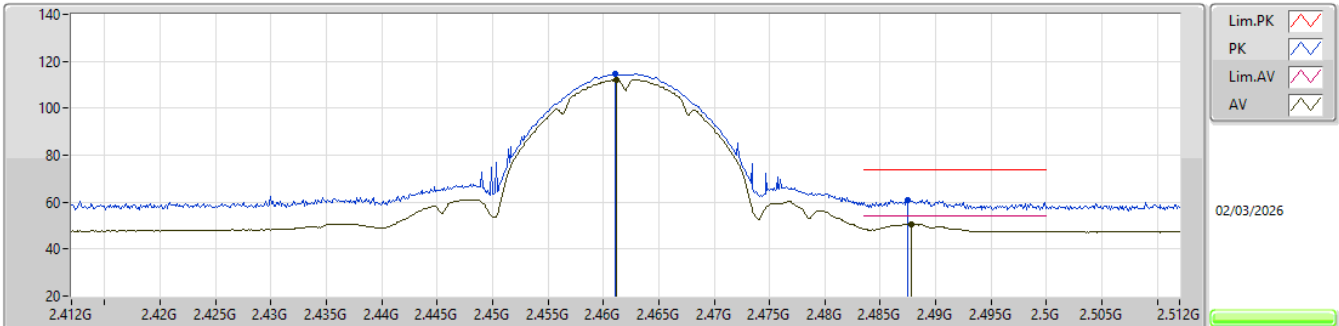


EUT_V_2TX
Setting 22.5
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4611G	114.63	Inf	-Inf	81.44	3	Vertical	345	2.87	-	27.50	5.69	-				
AV	2.4612G	112.22	Inf	-Inf	79.03	3	Vertical	345	2.87	-	27.50	5.69	-				
PK	2.4875G	61.08	74.00	-12.92	27.77	3	Vertical	345	2.87	-	27.60	5.71	-				
AV	2.4878G	50.55	54.00	-3.45	17.24	3	Vertical	345	2.87	-	27.60	5.71	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

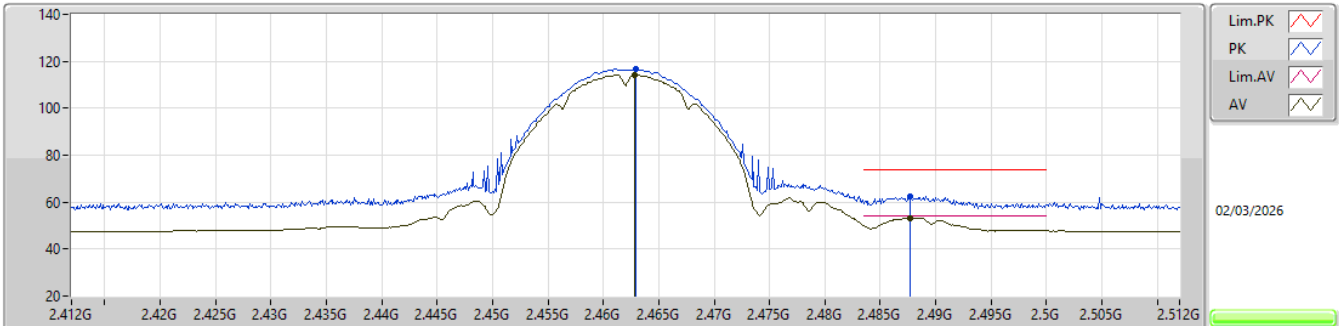


EUT_V_2TX
Setting 22.5
04-W-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4629G	116.71	Inf	-Inf	83.52	3	Horizontal	40	2.84	-	27.50	5.69	-				
AV	2.4628G	114.26	Inf	-Inf	81.07	3	Horizontal	40	2.84	-	27.50	5.69	-				
PK	2.4877G	62.58	74.00	-11.42	29.27	3	Horizontal	40	2.84	-	27.60	5.71	-				
AV	2.4877G	53.26	54.00	-0.74	19.95	3	Horizontal	40	2.84	-	27.60	5.71	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

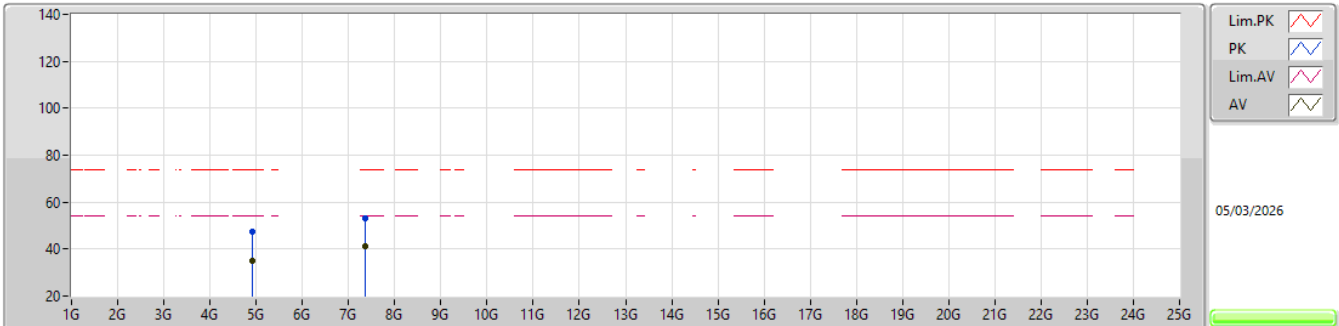


EUT_Y_2TX
SET 22.5
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91337G	47.33	74.00	-26.67	41.40	3	Vertical	20	1.80	22.5	32.93	8.17	35.17				
AV	4.92104G	35.22	54.00	-18.78	29.28	3	Vertical	20	1.80	22.5	32.94	8.17	35.17				
PK	7.36662G	53.32	74.00	-20.68	40.73	3	Vertical	276.1	1.80	22.5	36.87	9.74	34.02				
AV	7.36702G	41.02	54.00	-12.98	28.44	3	Vertical	276.1	1.80	22.5	36.86	9.74	34.02				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

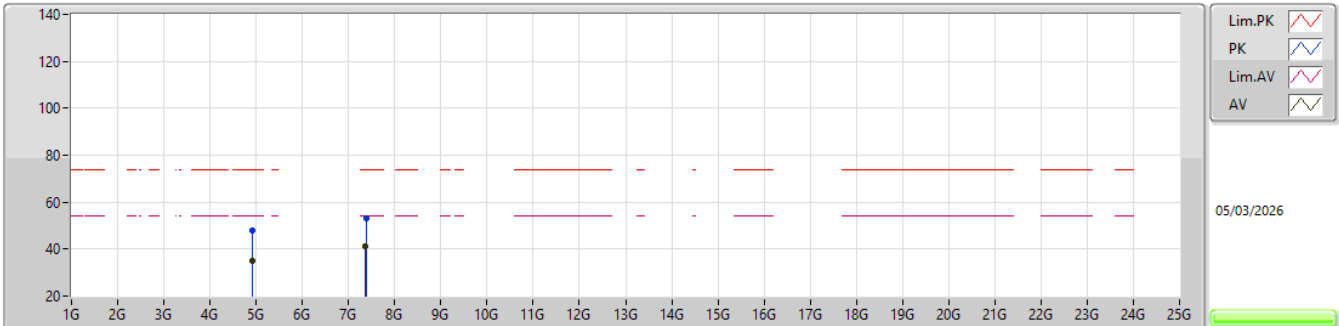


EUT_V_2TX
SET 22.5
05-X-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.9244G	47.91	74.00	-26.09	41.96	3	Horizontal	244	1.80	22.5	32.95	8.17	35.17				
AV	4.90678G	35.16	54.00	-18.84	29.25	3	Horizontal	244	1.80	22.5	32.91	8.17	35.17				
PK	7.3868G	53.36	74.00	-20.64	40.89	3	Horizontal	222	2.82	22.5	36.71	9.76	34.00				
AV	7.36762G	41.06	54.00	-12.94	28.48	3	Horizontal	222	2.82	22.5	36.86	9.74	34.02				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

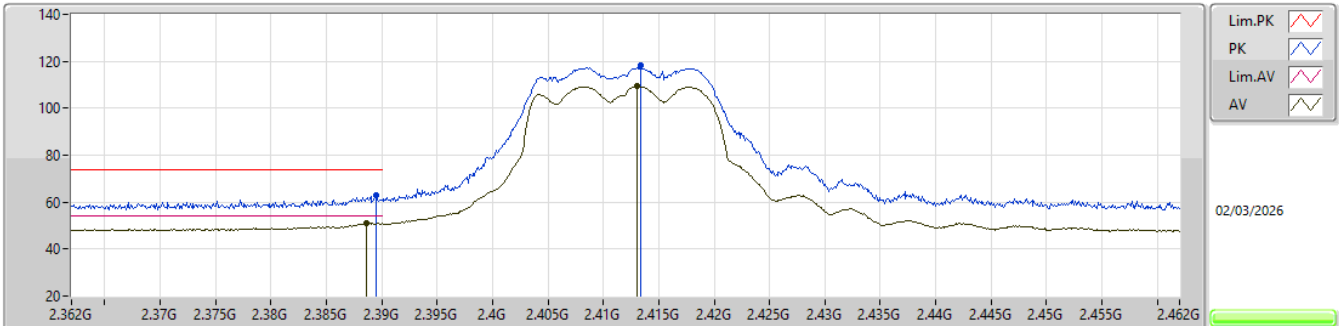


EUT_V_2TX
Setting 23
04-W-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3895G	62.70	74.00	-11.30	29.48	3	Vertical	348	2.92	-	27.59	5.63	-				
AV	2.3886G	50.91	54.00	-3.09	17.69	3	Vertical	348	2.92	-	27.59	5.63	-				
PK	2.4134G	118.11	Inf	-Inf	84.96	3	Vertical	348	2.92	-	27.50	5.65	-				
AV	2.413G	109.28	Inf	-Inf	76.13	3	Vertical	348	2.92	-	27.50	5.65	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

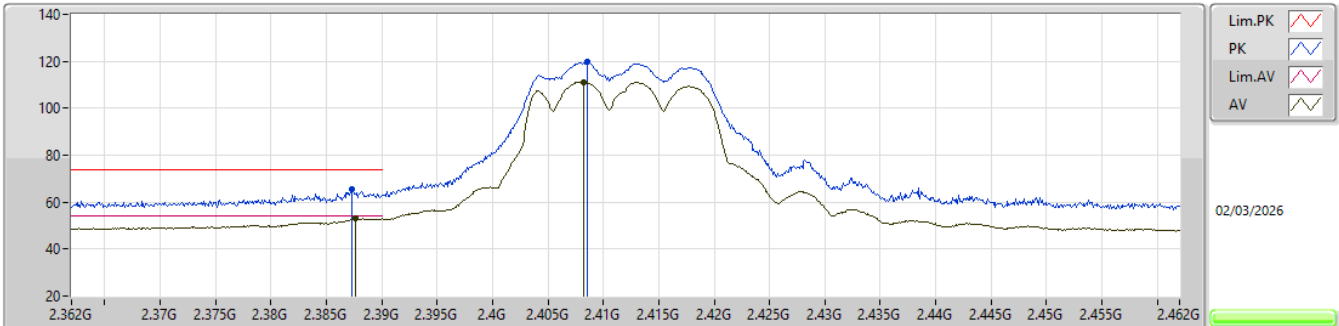


EUT_V_2TX
Setting 23
04-W-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3873G	65.77	74.00	-8.23	32.57	3	Horizontal	310	2.98	-	27.57	5.63	-				
AV	2.3876G	53.30	54.00	-0.70	20.09	3	Horizontal	310	2.98	-	27.58	5.63	-				
PK	2.4085G	119.79	Inf	-Inf	86.62	3	Horizontal	310	2.98	-	27.52	5.65	-				
AV	2.4082G	111.15	Inf	-Inf	77.98	3	Horizontal	310	2.98	-	27.52	5.65	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2417MHz_TX

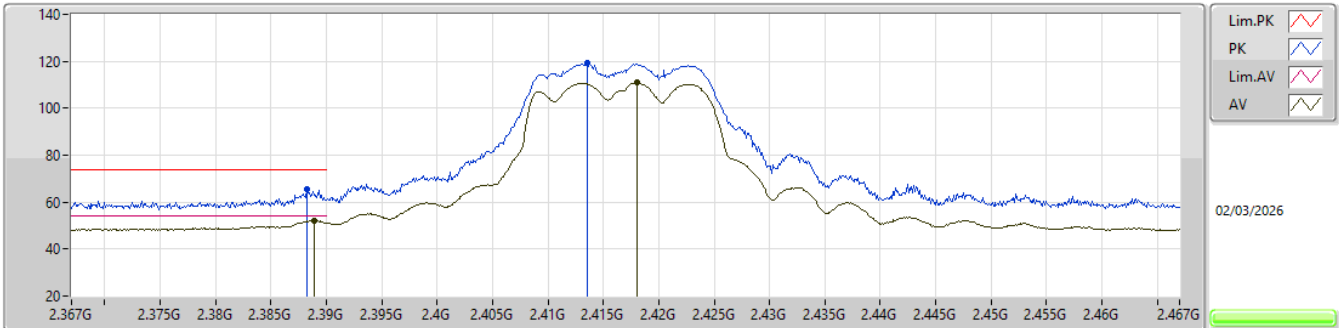


EUT_V_2TX
Setting 24.5
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3882G	65.33	74.00	-8.67	32.12	3	Vertical	347	2.93	-	27.58	5.63	-				
AV	2.3889G	52.26	54.00	-1.74	19.04	3	Vertical	347	2.93	-	27.59	5.63	-				
PK	2.4136G	119.06	Inf	-Inf	85.91	3	Vertical	347	2.93	-	27.50	5.65	-				
AV	2.418G	110.81	Inf	-Inf	77.65	3	Vertical	347	2.93	-	27.50	5.66	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2417MHz_TX

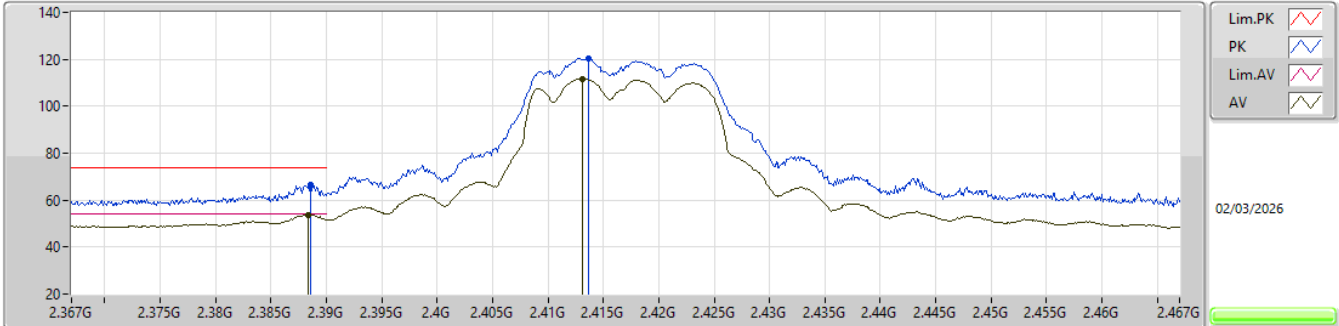


EUT V_2TX
Setting 24.5
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3886G	66.69	74.00	-7.31	33.47	3	Horizontal	59	2.61	-	27.59	5.63	-				
AV	2.3884G	53.74	54.00	-0.26	20.53	3	Horizontal	59	2.61	-	27.58	5.63	-				
PK	2.4137G	120.58	Inf	-Inf	87.43	3	Horizontal	59	2.61	-	27.50	5.65	-				
AV	2.4131G	111.75	Inf	-Inf	78.60	3	Horizontal	59	2.61	-	27.50	5.65	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

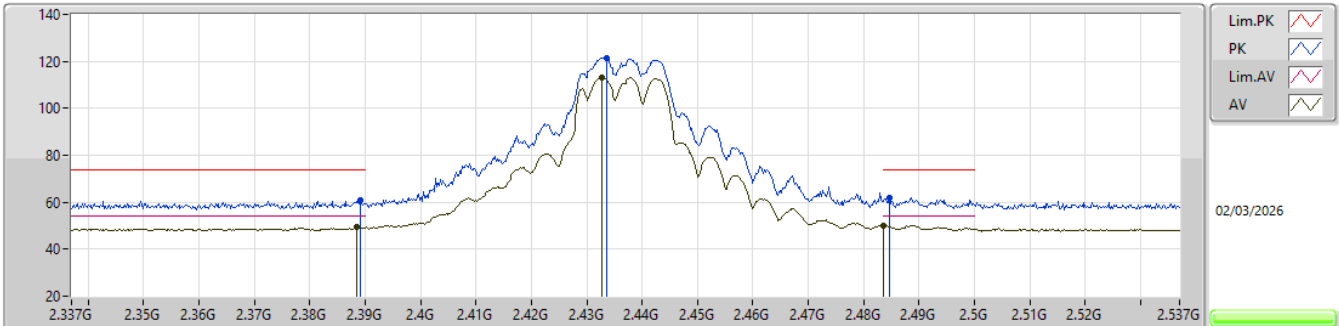


EUT_V_2TX
Setting 30
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3892G	61.11	74.00	-12.89	27.89	3	Vertical	347	2.90	-	27.59	5.63	-			
AV	2.3884G	49.31	54.00	-4.69	16.10	3	Vertical	347	2.90	-	27.58	5.63	-			
PK	2.4336G	121.60	Inf	-Inf	88.37	3	Vertical	347	2.90	-	27.56	5.67	-			
AV	2.4328G	113.29	Inf	-Inf	80.05	3	Vertical	347	2.90	-	27.57	5.67	-			
PK	2.4846G	61.81	74.00	-12.19	28.50	3	Vertical	347	2.90	-	27.60	5.71	-			
AV	2.4835G	50.20	54.00	-3.80	16.89	3	Vertical	347	2.90	-	27.60	5.71	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2437MHz_TX

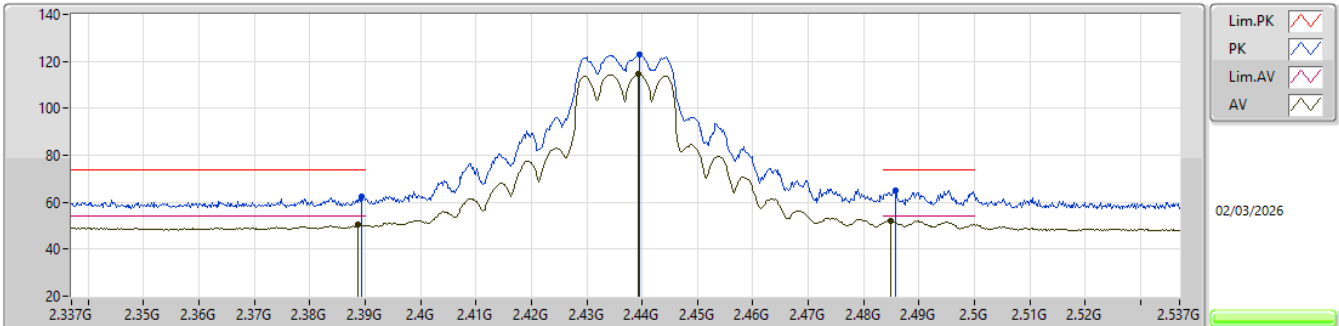


EUT_V_2TX
Setting 30
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	62.51	74.00	-11.49	29.29	3	Horizontal	297	1.80	-	27.59	5.63	-			
AV	2.3888G	50.47	54.00	-3.53	17.25	3	Horizontal	297	1.80	-	27.59	5.63	-			
PK	2.4396G	122.88	Inf	-Inf	89.71	3	Horizontal	297	1.80	-	27.50	5.67	-			
AV	2.4392G	114.64	Inf	-Inf	81.46	3	Horizontal	297	1.80	-	27.51	5.67	-			
PK	2.4858G	65.18	74.00	-8.82	31.87	3	Horizontal	297	1.80	-	27.60	5.71	-			
AV	2.4848G	52.20	54.00	-1.80	18.89	3	Horizontal	297	1.80	-	27.60	5.71	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2457MHz_TX

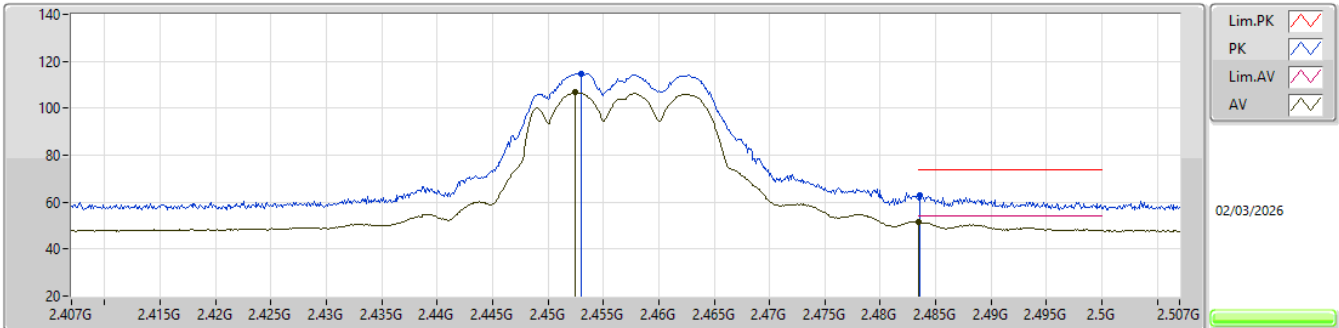


EUT_V_2TX
Setting 21.5
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.453G	114.76	Inf	-Inf	81.57	3	Vertical	347	2.86	-	27.50	5.69	-			
AV	2.4525G	106.64	Inf	-Inf	73.46	3	Vertical	347	2.86	-	27.50	5.68	-			
PK	2.4836G	62.73	74.00	-11.27	29.42	3	Vertical	347	2.86	-	27.60	5.71	-			
AV	2.4835G	51.50	54.00	-2.50	18.19	3	Vertical	347	2.86	-	27.60	5.71	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2457MHz_TX

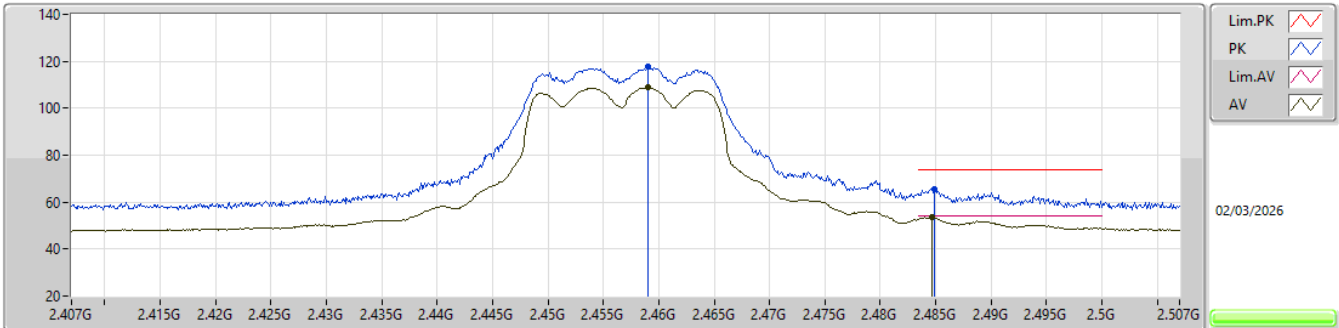


EUT_V_2TX
Setting 21.5
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.459G	117.60	Inf	-Inf	84.41	3	Horizontal	61	1.80	-	27.50	5.69	-			
AV	2.459G	108.78	Inf	-Inf	75.59	3	Horizontal	61	1.80	-	27.50	5.69	-			
PK	2.4849G	65.73	74.00	-8.27	32.42	3	Horizontal	61	1.80	-	27.60	5.71	-			
AV	2.4847G	53.70	54.00	-0.30	20.39	3	Horizontal	61	1.80	-	27.60	5.71	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

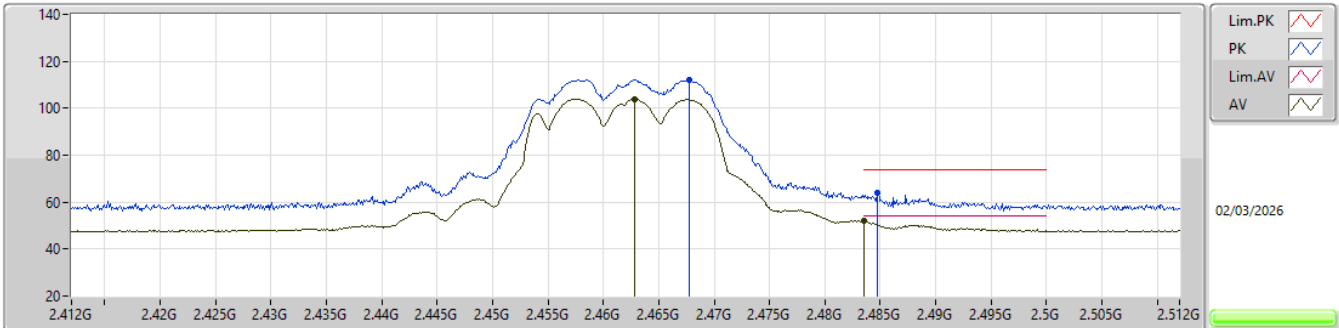


EUT_V_2TX
Setting 19
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4677G	112.04	Inf	-Inf	78.84	3	Vertical	347	2.87	-	27.50	5.70	-			
AV	2.4628G	103.92	Inf	-Inf	70.73	3	Vertical	347	2.87	-	27.50	5.69	-			
PK	2.4847G	63.78	74.00	-10.22	30.47	3	Vertical	347	2.87	-	27.60	5.71	-			
AV	2.4835G	51.96	54.00	-2.04	18.65	3	Vertical	347	2.87	-	27.60	5.71	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2462MHz_TX

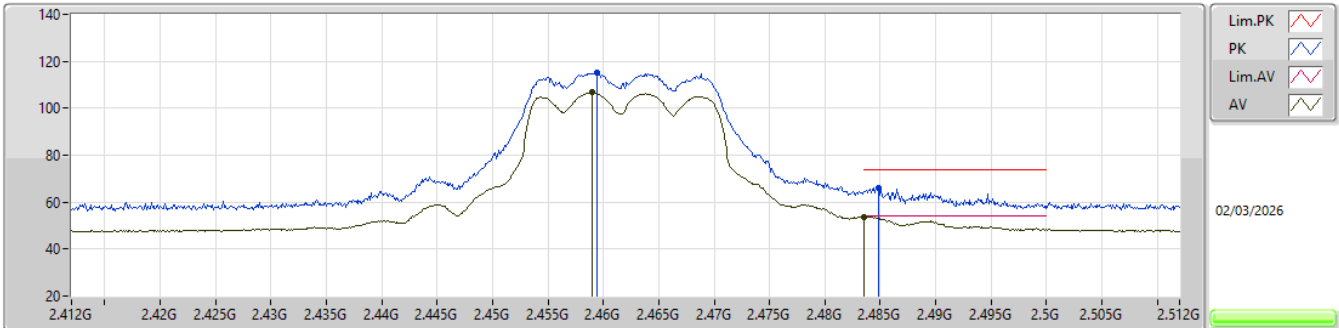


EUT_V_2TX
Setting 19
04-W-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4594G	114.97	Inf	-Inf	81.78	3	Horizontal	64	1.80	-	27.50	5.69	-			
AV	2.459G	106.67	Inf	-Inf	73.48	3	Horizontal	64	1.80	-	27.50	5.69	-			
PK	2.4848G	66.25	74.00	-7.75	32.94	3	Horizontal	64	1.80	-	27.60	5.71	-			
AV	2.4835G	53.86	54.00	-0.14	20.55	3	Horizontal	64	1.80	-	27.60	5.71	-			

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

2412MHz_TX

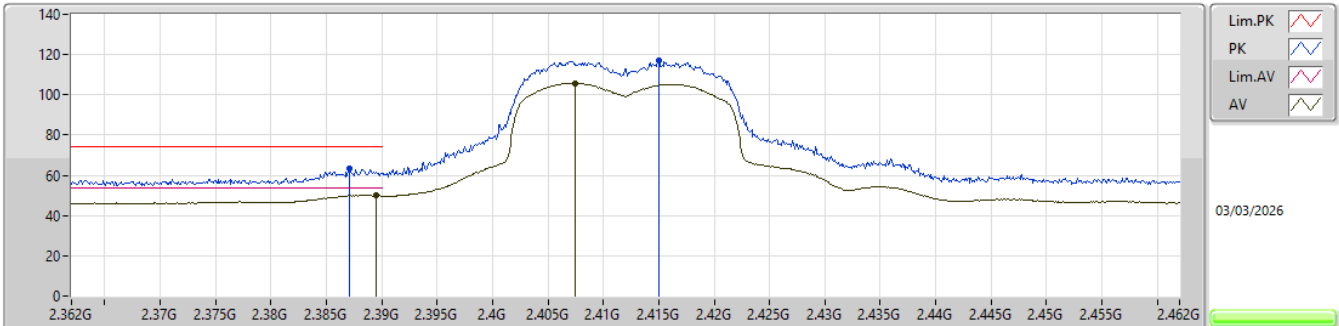


EUT_Y_2TX
SET 23
17\24.5\21\22.5\23\26\23
7.69\1.64\6.14\4.66\3.83\7.17\3.87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3871G	63.37	74.00	-10.63	31.10	3	Vertical	356	1.51	23	27.27	5.00	-			
AV	2.3895G	50.13	54.00	-3.87	17.84	3	Vertical	356	1.51	23	27.29	5.00	-			
PK	2.415G	116.94	Inf	-Inf	84.41	3	Vertical	356	1.51	23	27.50	5.03	-			
AV	2.4075G	105.77	Inf	-Inf	73.27	3	Vertical	356	1.51	23	27.48	5.02	-			

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

2412MHz_TX

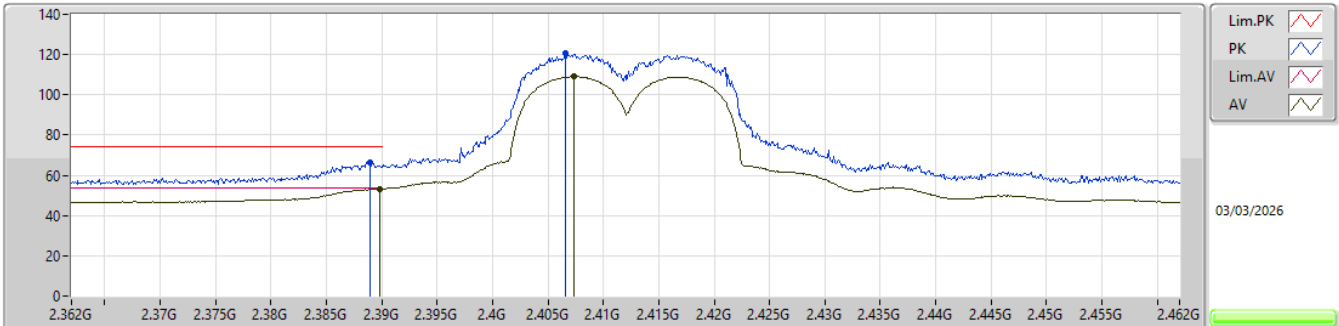


EUT_Y_2TX
SET 21
23\20.5\21.5\21
-2.07\1.43\ -0.02\0.71

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.3889G	66.28	74.00	-7.72	33.99	3	Horizontal	303	1.80	21	27.29	5.00	-			
AV	2.3898G	53.29	54.00	-0.71	20.99	3	Horizontal	303	1.80	21	27.30	5.00	-			
PK	2.4066G	120.98	Inf	-Inf	88.49	3	Horizontal	303	1.80	21	27.47	5.02	-			
AV	2.4073G	109.02	Inf	-Inf	76.53	3	Horizontal	303	1.80	21	27.47	5.02	-			

2.4-2.4835GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

2417MHz_TX

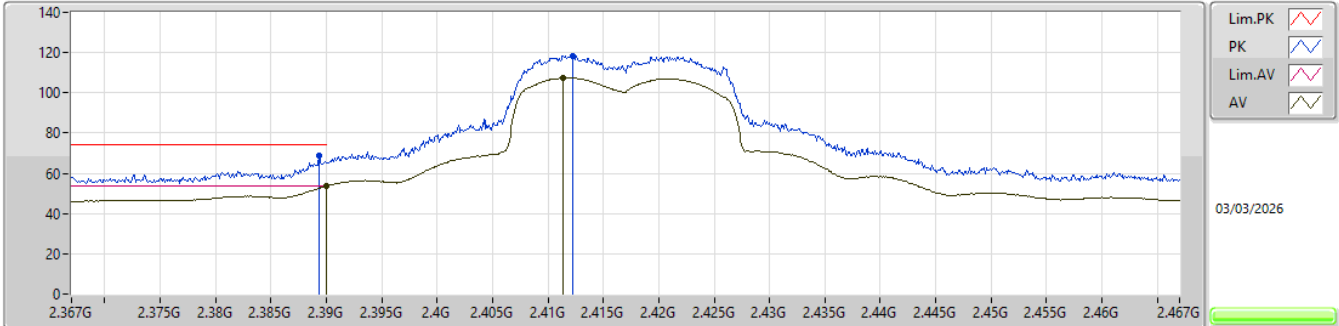


EUT_Y_2TX
SET 25
21\28\20.5\24\25.5\25
7.12\7.63\7.20\3.02\1.27\0.32

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3893G	68.89	74.00	-5.11	36.60	3	Vertical	358	1.51	25	27.29	5.00	-				
AV	2.39G	53.68	54.00	-0.32	21.38	3	Vertical	358	1.51	25	27.30	5.00	-				
PK	2.4122G	118.48	Inf	-Inf	85.95	3	Vertical	358	1.51	25	27.50	5.03	-				
AV	2.4114G	107.34	Inf	-Inf	74.81	3	Vertical	358	1.51	25	27.50	5.03	-				

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

2417MHz_TX

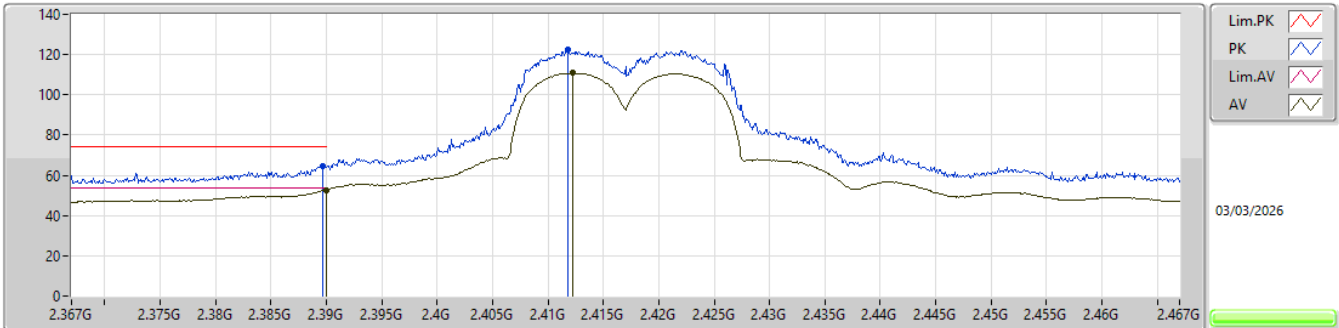


EUT_Y_2TX
SET 23
25\20.5\24.5\22.5\23.5\23
-4.41\4.43\ -3.07\1.81\ -0.38\1.20

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3897G	64.69	74.00	-9.31	32.39	3	Horizontal	303	1.80	23	27.30	5.00	-				
AV	2.39G	52.80	54.00	-1.20	20.50	3	Horizontal	303	1.80	23	27.30	5.00	-				
PK	2.4118G	122.49	Inf	-Inf	89.96	3	Horizontal	303	1.80	23	27.50	5.03	-				
AV	2.4122G	110.86	Inf	-Inf	78.33	3	Horizontal	303	1.80	23	27.50	5.03	-				

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

2437MHz_TX

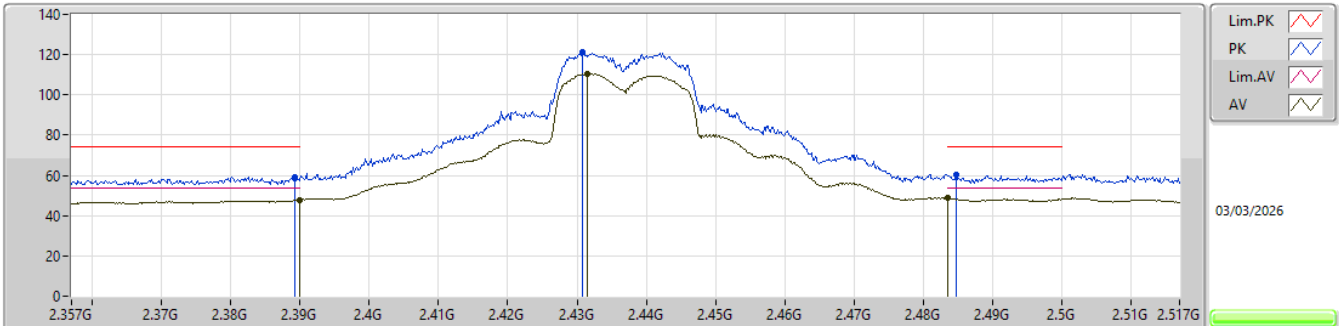


EUT_V_2TX
SET 30
21\28\30
7.37\5.62\5.40

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	2.38916G	59.42	74.00	-14.58	27.13	3	Vertical	358	1.51	30	27.29	5.00	-					
AV	2.38996G	47.79	54.00	-6.21	15.49	3	Vertical	358	1.51	30	27.30	5.00	-					
PK	2.43076G	121.02	Inf	-Inf	88.38	3	Vertical	358	1.51	30	27.59	5.05	-					
AV	2.43156G	110.50	Inf	-Inf	77.87	3	Vertical	358	1.51	30	27.58	5.05	-					
PK	2.48484G	60.11	74.00	-13.89	27.13	3	Vertical	358	1.51	30	27.85	5.13	-					
AV	2.4835G	48.60	54.00	-5.40	15.63	3	Vertical	358	1.51	30	27.84	5.13	-					

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

2437MHz_TX

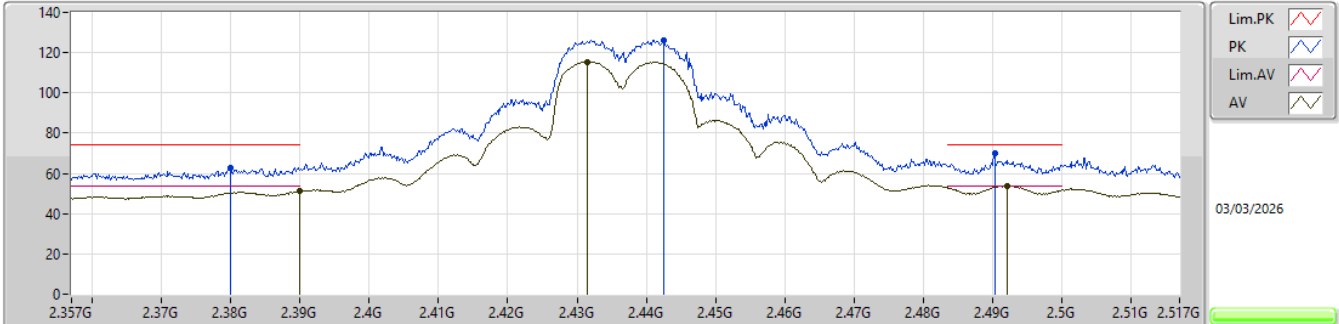


EUT_V_2TX
SET 30
30
0.23

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38004G	62.64	74.00	-11.36	30.45	3	Horizontal	61	1.52	30	27.20	4.99	-				
AV	2.38996G	51.22	54.00	-2.78	18.92	3	Horizontal	61	1.52	30	27.30	5.00	-				
PK	2.44244G	126.27	Inf	-Inf	93.68	3	Horizontal	61	1.52	30	27.52	5.07	-				
AV	2.43156G	115.50	Inf	-Inf	82.87	3	Horizontal	61	1.52	30	27.58	5.05	-				
PK	2.49028G	69.72	74.00	-4.28	36.68	3	Horizontal	61	1.52	30	27.90	5.14	-				
AV	2.49204G	53.77	54.00	-0.23	20.71	3	Horizontal	61	1.52	30	27.92	5.14	-				

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

2457MHz_TX

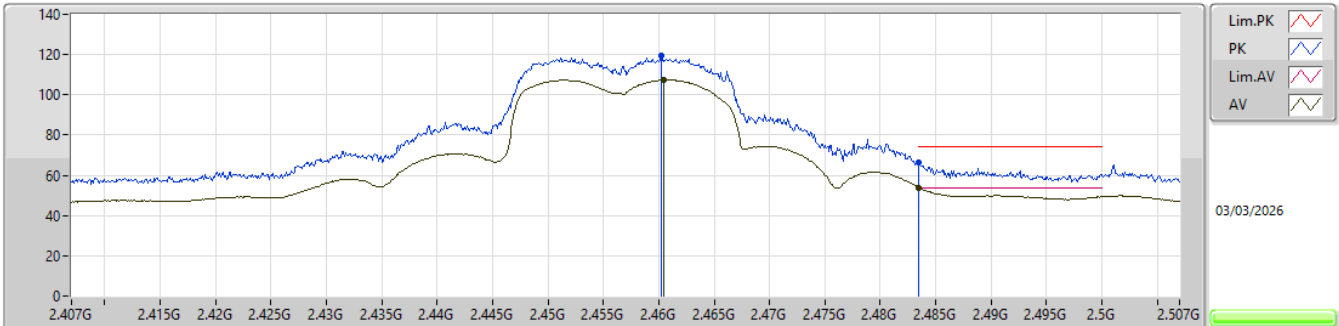


EUT_Y_2TX
SET 27
21\26\28.5\27.5\27
5.19\2.14\3.09\1.40\0.24

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4602G	119.47	Inf	-Inf	86.78	3	Vertical	358	1.51	27	27.60	5.09	-				
AV	2.4605G	107.32	Inf	-Inf	74.62	3	Vertical	358	1.51	27	27.61	5.09	-				
PK	2.4835G	66.43	74.00	-7.57	33.46	3	Vertical	358	1.51	27	27.84	5.13	-				
AV	2.4835G	53.76	54.00	-0.24	20.79	3	Vertical	358	1.51	27	27.84	5.13	-				

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

2457MHz_TX

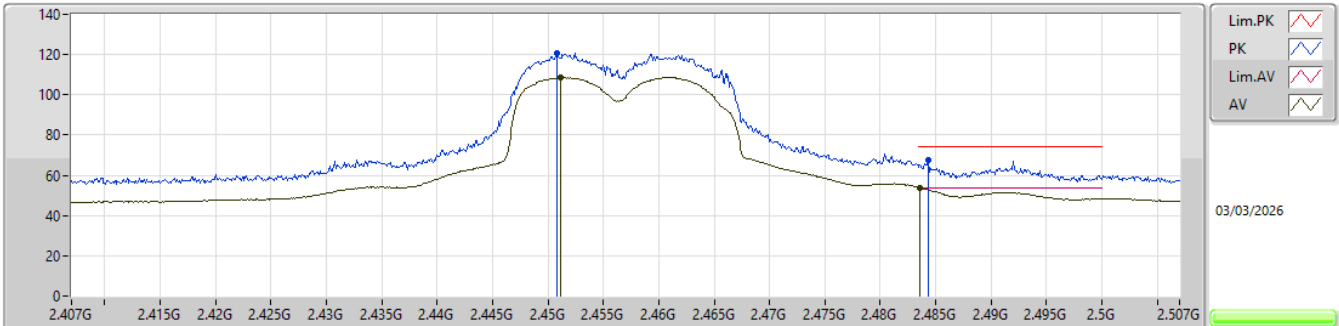


EUT_Y_2TX
SET 20
27\18.5\22.5\20.5\19.5\20
-8.40\2.01\2.01\0.54\0.66\0.06

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4508G	120.66	Inf	-Inf	87.98	3	Horizontal	63	1.54	20	27.60	5.08	-				
AV	2.4511G	108.57	Inf	-Inf	75.89	3	Horizontal	63	1.54	20	27.60	5.08	-				
PK	2.4843G	67.30	74.00	-6.70	34.33	3	Horizontal	63	1.54	20	27.84	5.13	-				
AV	2.4836G	53.94	54.00	-0.06	20.97	3	Horizontal	63	1.54	20	27.84	5.13	-				

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

2462MHz_TX

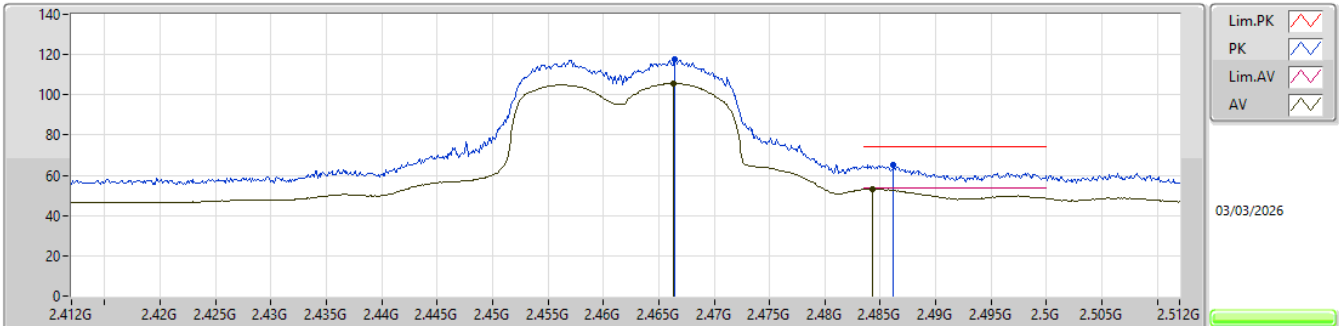


EUT_Y_2TX
SET 18.5
20\24.5\22.5\23.5\24
4.56\0.41\2.92\1.84\0.74

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4664G	117.64	Inf	-Inf	84.88	3	Vertical	358	1.50	24	27.66	5.10	-				
AV	2.4663G	105.56	Inf	-Inf	72.80	3	Vertical	358	1.50	24	27.66	5.10	-				
PK	2.4862G	64.96	74.00	-9.04	31.97	3	Vertical	358	1.50	24	27.86	5.13	-				
AV	2.4843G	53.26	54.00	-0.74	20.29	3	Vertical	358	1.50	24	27.84	5.13	-				

2.4-2.4835GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

2462MHz_TX

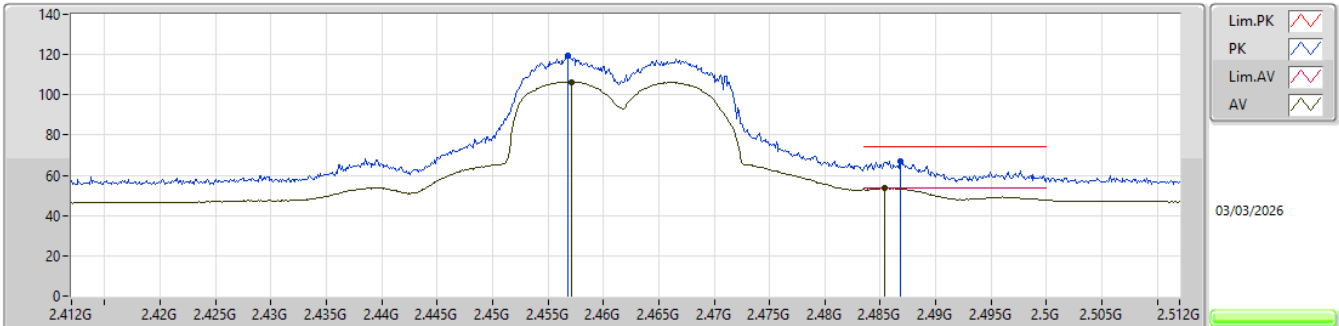

EUT_Y_2TX
SET 18.5
24\14\19\16.5\17.5\18\18.5\18
-9.61\5.07\ -0.59\2.36\1.05\0.55\ -0.20\0.51

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4568G	119.20	Inf	-Inf	86.51	3	Horizontal	68	1.51	18	27.60	5.09	-				
AV	2.4571G	106.46	Inf	-Inf	73.77	3	Horizontal	68	1.51	18	27.60	5.09	-				
PK	2.4868G	66.94	74.00	-7.06	33.94	3	Horizontal	68	1.51	18	27.87	5.13	-				
AV	2.4854G	53.49	54.00	-0.51	20.51	3	Horizontal	68	1.51	18	27.85	5.13	-				




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	AV	2.4876G	53.98	54.00	-0.02	3	Horizontal	40	2.00	25.5

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

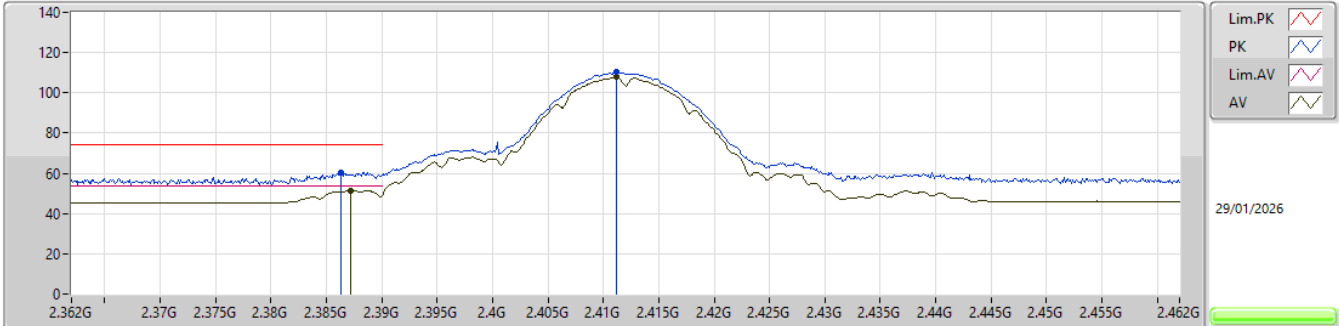


EUT_Y_1TX
SET 25.5
25.5\27\24.5\25.5
2.28\11.63\3.83\2.41

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3863G	60.51	74.00	-13.49	28.38	3	Vertical	350	1.89	25.5	27.60	4.53	-				
AV	2.3872G	51.59	54.00	-2.41	19.46	3	Vertical	350	1.89	25.5	27.60	4.53	-				
PK	2.4112G	110.13	Inf	-Inf	78.07	3	Vertical	350	1.89	25.5	27.50	4.56	-				
AV	2.4112G	107.73	Inf	-Inf	75.67	3	Vertical	350	1.89	25.5	27.50	4.56	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

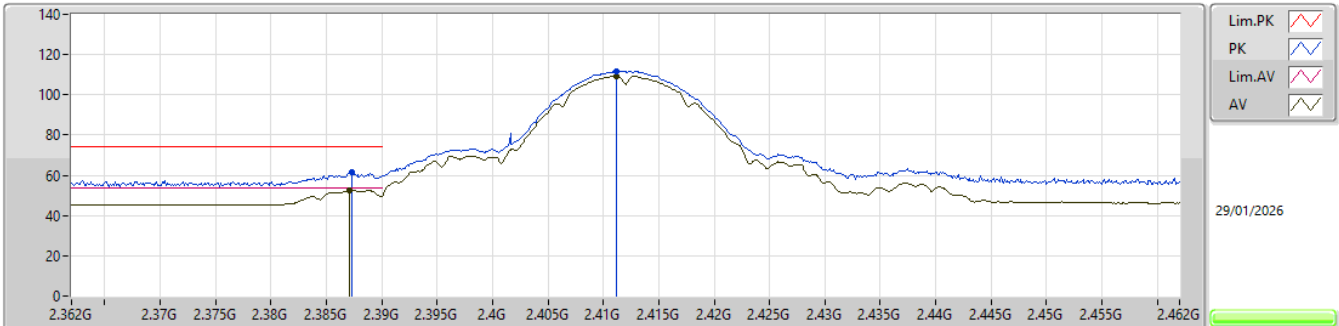


EUT_Y_1TX
SET 25.5
25.5
1.44

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3873G	61.34	74.00	-12.66	29.21	3	Horizontal	73	1.62	25.5	27.60	4.53	-				
AV	2.3871G	52.56	54.00	-1.44	20.43	3	Horizontal	73	1.62	25.5	27.60	4.53	-				
PK	2.4112G	111.92	Inf	-Inf	79.86	3	Horizontal	73	1.62	25.5	27.50	4.56	-				
AV	2.4112G	109.52	Inf	-Inf	77.46	3	Horizontal	73	1.62	25.5	27.50	4.56	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

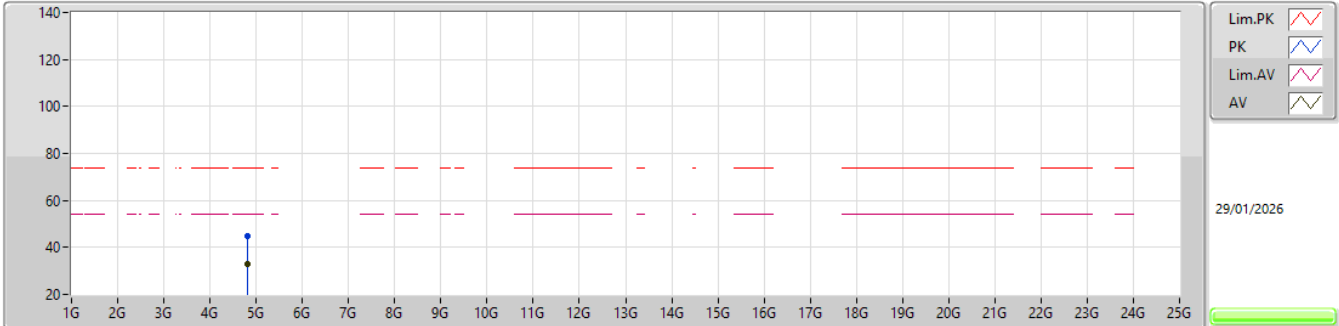


EUT_Y_1TX
SET 25.5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.8073G	44.77	74.00	-29.23	40.52	3	Vertical	1	1.80	25.5	31.20	6.71	33.66			
AV	4.824G	32.79	54.00	-21.21	28.53	3	Vertical	1	1.80	25.5	31.20	6.73	33.67			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2412MHz_TX

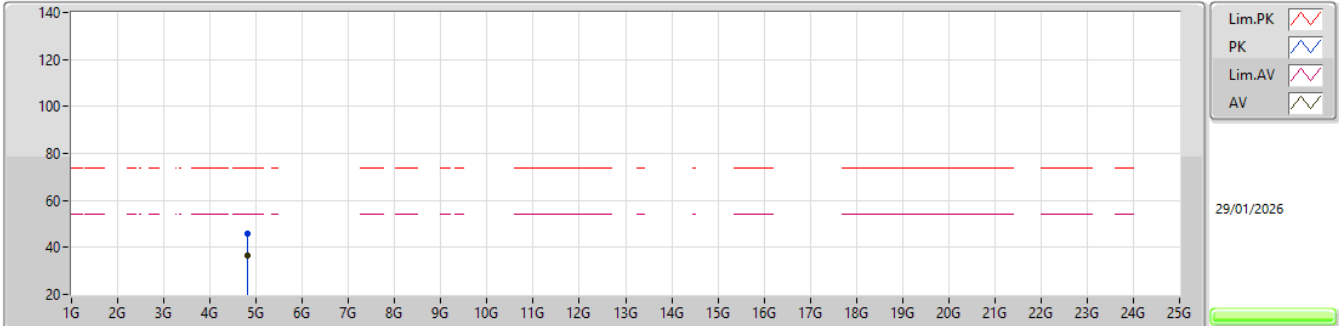


EUT_Y_1TX
SET 25.5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.82368G	45.92	74.00	-28.08	41.66	3	Horizontal	279	1.80	25.5	31.20	6.73	33.67				
AV	4.824G	36.55	54.00	-17.45	32.29	3	Horizontal	279	1.80	25.5	31.20	6.73	33.67				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

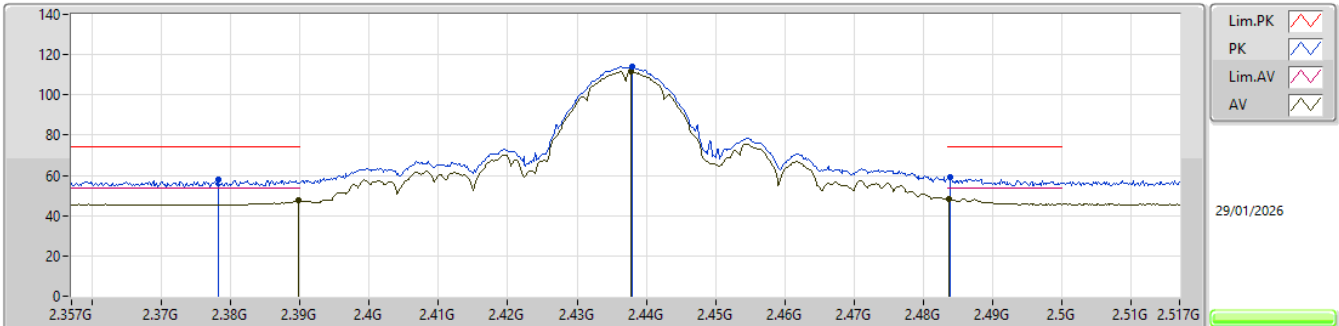


EUT_Y_1TX
SET 27
25.5\27
7.81\5.73

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.37812G	57.68	74.00	-16.32	25.55	3	Vertical	358	1.50	27	27.60	4.53	-				
AV	2.3898G	47.40	54.00	-6.60	15.27	3	Vertical	358	1.50	27	27.60	4.53	-				
PK	2.43796G	113.84	Inf	-Inf	81.82	3	Vertical	358	1.50	27	27.42	4.60	-				
AV	2.4378G	111.53	Inf	-Inf	79.51	3	Vertical	358	1.50	27	27.42	4.60	-				
PK	2.48388G	58.85	74.00	-15.15	26.74	3	Vertical	358	1.50	27	27.44	4.67	-				
AV	2.48372G	48.27	54.00	-5.73	16.16	3	Vertical	358	1.50	27	27.44	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

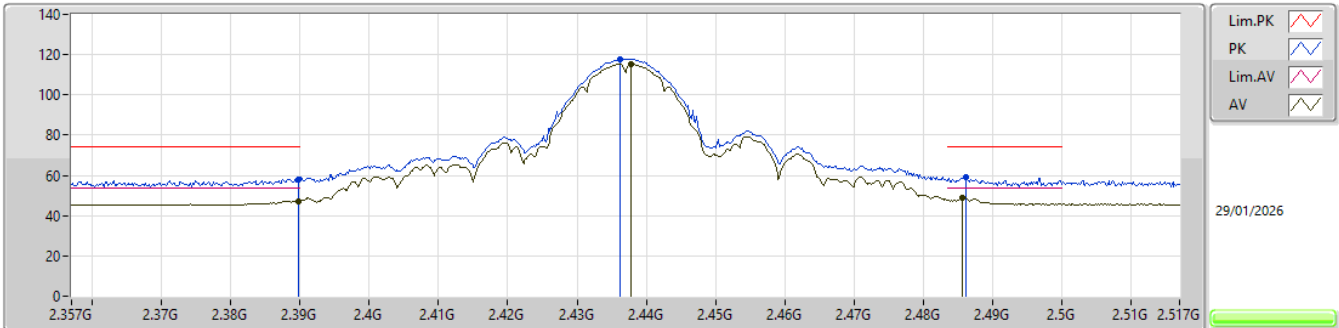


EUT_Y_1TX
SET 27
27
4.90

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3898G	58.12	74.00	-15.88	25.99	3	Horizontal	67	1.99	27	27.60	4.53	-				
AV	2.3898G	47.25	54.00	-6.75	15.12	3	Horizontal	67	1.99	27	27.60	4.53	-				
PK	2.4362G	117.93	Inf	-Inf	85.90	3	Horizontal	67	1.99	27	27.44	4.59	-				
AV	2.4378G	115.56	Inf	-Inf	83.54	3	Horizontal	67	1.99	27	27.42	4.60	-				
PK	2.48612G	58.93	74.00	-15.07	26.80	3	Horizontal	67	1.99	27	27.46	4.67	-				
AV	2.48564G	49.10	54.00	-4.90	16.97	3	Horizontal	67	1.99	27	27.46	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2437MHz_TX

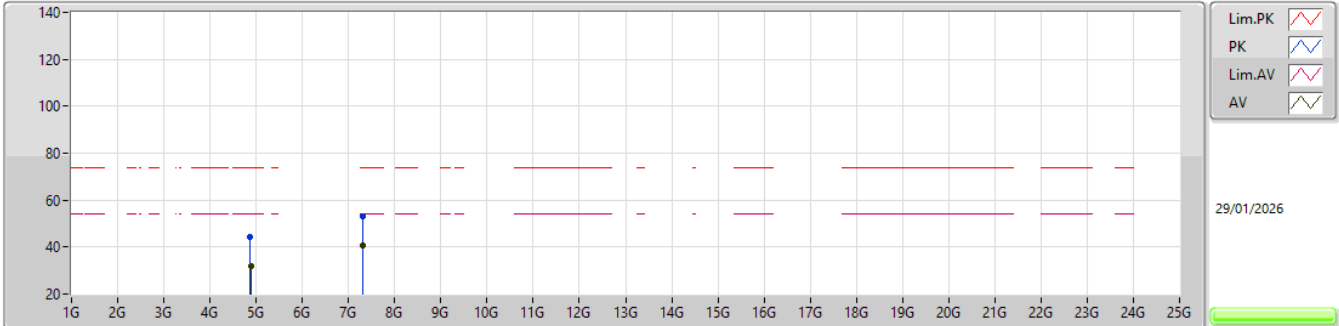


EUT Y_1TX
SET 27

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.85782G	44.19	74.00	-29.81	39.93	3	Vertical	42	1.80	27	31.18	6.75	33.67				
AV	4.88251G	31.93	54.00	-22.07	27.71	3	Vertical	42	1.80	27	31.13	6.76	33.67				
PK	7.31268G	53.06	74.00	-20.94	41.28	3	Vertical	113	2.26	27	36.57	8.75	33.54				
AV	7.30996G	40.80	54.00	-13.20	29.02	3	Vertical	113	2.26	27	36.58	8.74	33.54				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX


2437MHz_TX

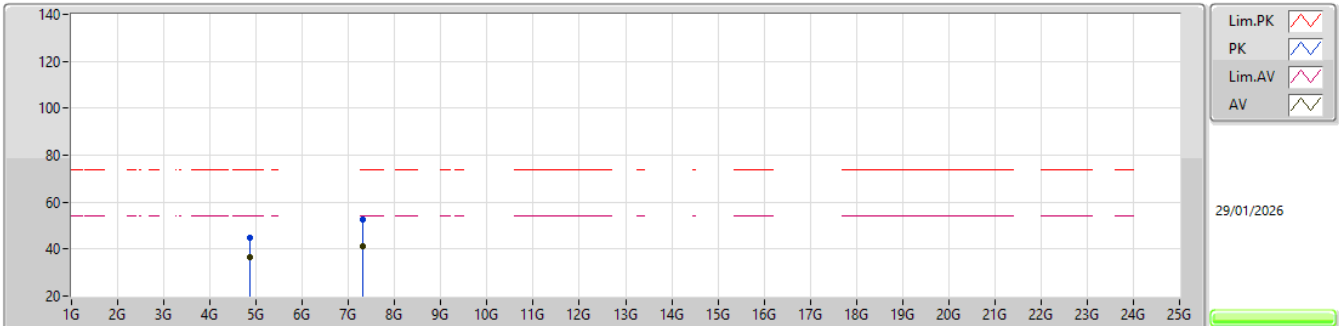EUT Y_1TX
SET 27

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87376G	45.06	74.00	-28.94	40.82	3	Horizontal	87	2.18	27	31.15	6.76	33.67				
AV	4.87404G	36.52	54.00	-17.48	32.28	3	Horizontal	87	2.18	27	31.15	6.76	33.67				
PK	7.3122G	52.77	74.00	-21.23	40.98	3	Horizontal	56	1.80	27	36.58	8.75	33.54				
AV	7.31172G	41.30	54.00	-12.70	29.51	3	Horizontal	56	1.80	27	36.58	8.75	33.54				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

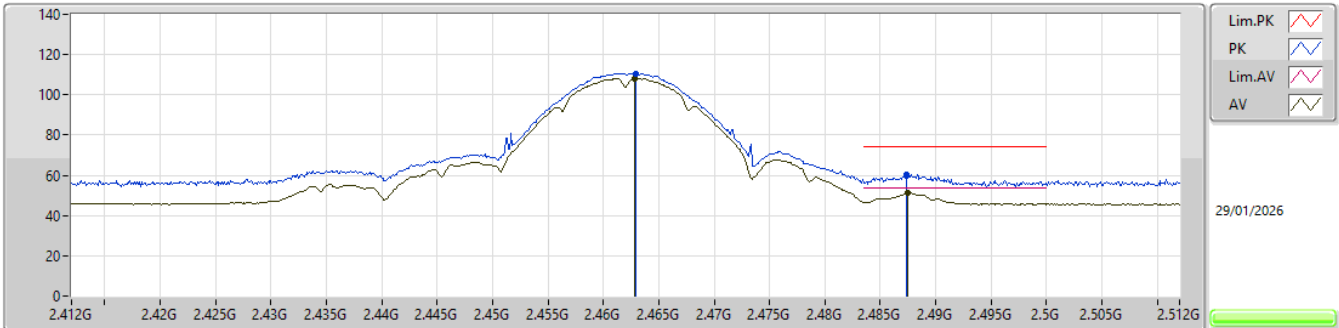


EUT_Y_1TX
SET 25.5
25.5\27\24.5\25.5
2.65\ -7.24\3.67\2.61

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4629G	110.71	Inf	-Inf	78.68	3	Vertical	351	1.50	25.5	27.40	4.63	-				
AV	2.4628G	108.26	Inf	-Inf	76.23	3	Vertical	351	1.50	25.5	27.40	4.63	-				
PK	2.4874G	60.23	74.00	-13.77	28.09	3	Vertical	351	1.50	25.5	27.47	4.67	-				
AV	2.4875G	51.39	54.00	-2.61	19.24	3	Vertical	351	1.50	25.5	27.48	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

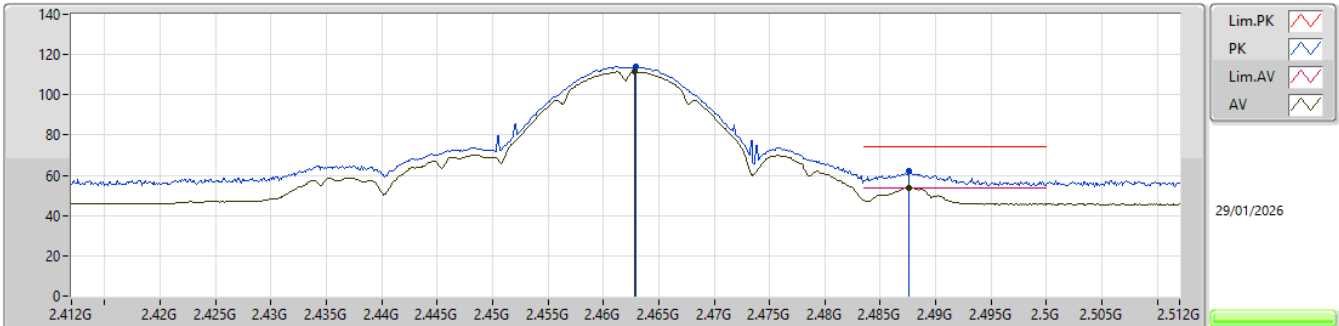


EUT_Y_1TX
SET 25.5
25.5
0.02

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4629G	113.99	Inf	-Inf	81.96	3	Horizontal	40	2.00	25.5	27.40	4.63	-				
AV	2.4628G	111.53	Inf	-Inf	79.50	3	Horizontal	40	2.00	25.5	27.40	4.63	-				
PK	2.4876G	62.01	74.00	-11.99	29.86	3	Horizontal	40	2.00	25.5	27.48	4.67	-				
AV	2.4876G	53.98	54.00	-0.02	21.83	3	Horizontal	40	2.00	25.5	27.48	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

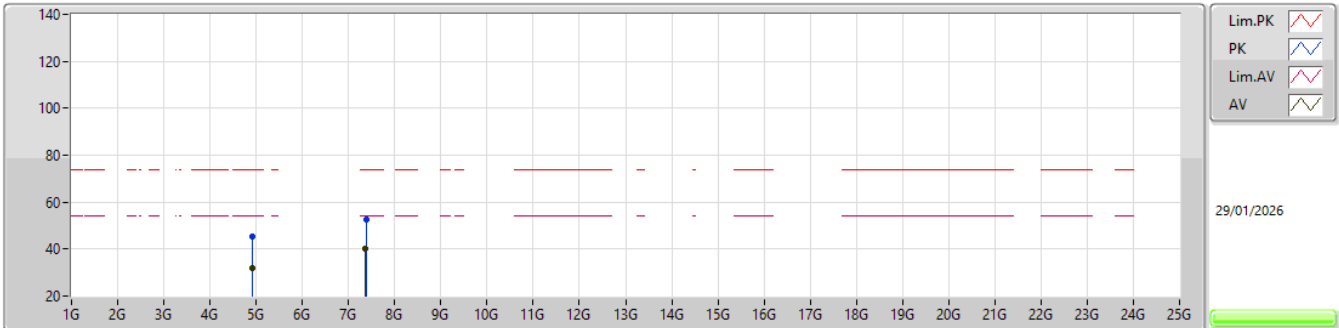


EUT_Y_1TX
SET 25.5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.9071G	45.31	74.00	-28.69	41.06	3	Vertical	300	1.80	25.5	31.14	6.78	33.67				
AV	4.92084G	32.04	54.00	-21.96	27.69	3	Vertical	300	1.80	25.5	31.23	6.79	33.67				
PK	7.39159G	52.64	74.00	-21.36	40.83	3	Vertical	301	1.80	25.5	36.42	8.96	33.57				
AV	7.36626G	40.00	54.00	-14.00	28.20	3	Vertical	301	1.80	25.5	36.47	8.89	33.56				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_1TX

2462MHz_TX

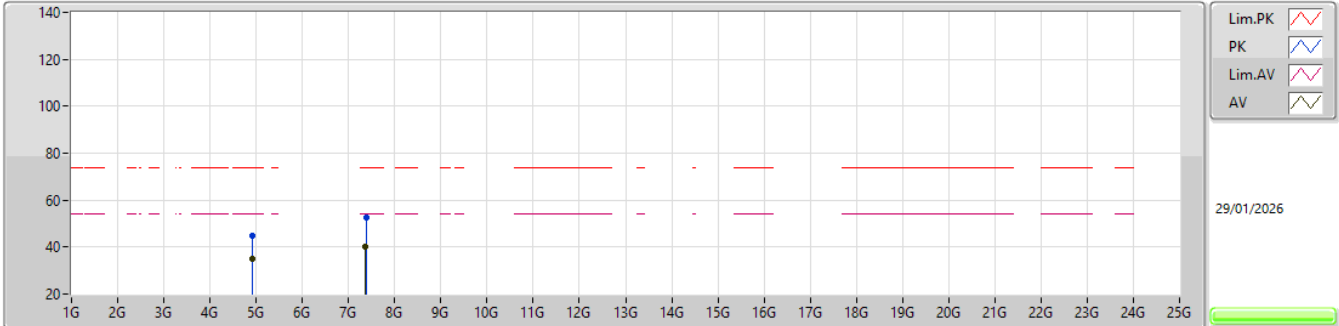


EUT_Y_1TX
SET 25.5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.92412G	45.07	74.00	-28.93	40.71	3	Horizontal	80	1.80	25.5	31.24	6.79	33.67				
AV	4.924G	34.87	54.00	-19.13	30.51	3	Horizontal	80	1.80	25.5	31.24	6.79	33.67				
PK	7.39823G	52.48	74.00	-21.52	40.68	3	Horizontal	299	1.78	25.5	36.40	8.98	33.58				
AV	7.36762G	39.96	54.00	-14.04	28.17	3	Horizontal	299	1.78	25.5	36.46	8.89	33.56				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

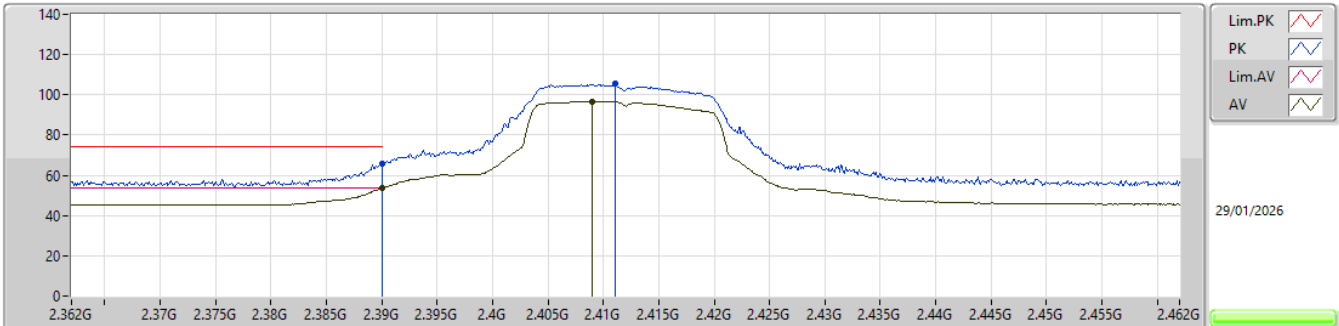


EUT_Y_1TX
SET 19.5
15\21\18\19.5\20\19.5
6.44\1.98\3.05\0.52\0.24\0.59

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.39G	65.81	74.00	-8.19	33.68	3	Vertical	350	1.93	19.5	27.60	4.53	-				
AV	2.39G	53.41	54.00	-0.59	21.28	3	Vertical	350	1.93	19.5	27.60	4.53	-				
PK	2.4111G	105.35	Inf	-Inf	73.29	3	Vertical	350	1.93	19.5	27.50	4.56	-				
AV	2.409G	96.62	Inf	-Inf	64.56	3	Vertical	350	1.93	19.5	27.51	4.55	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

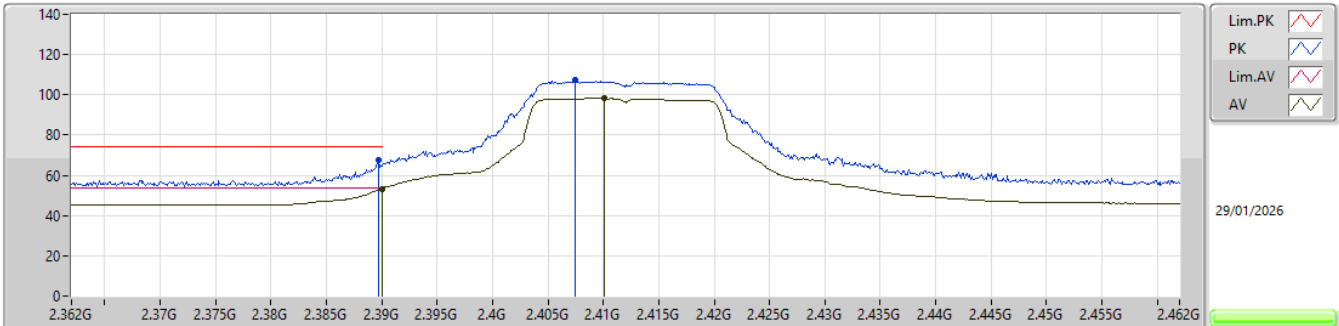


EUT_Y_1TX
SET 19.5
19.5
0.78

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3897G	67.84	74.00	-6.16	35.71	3	Horizontal	76	1.50	19.5	27.60	4.53	-			
AV	2.39G	53.22	54.00	-0.78	21.09	3	Horizontal	76	1.50	19.5	27.60	4.53	-			
PK	2.4074G	107.12	Inf	-Inf	75.04	3	Horizontal	76	1.50	19.5	27.53	4.55	-			
AV	2.4101G	98.21	Inf	-Inf	66.15	3	Horizontal	76	1.50	19.5	27.50	4.56	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX


2412MHz_TX

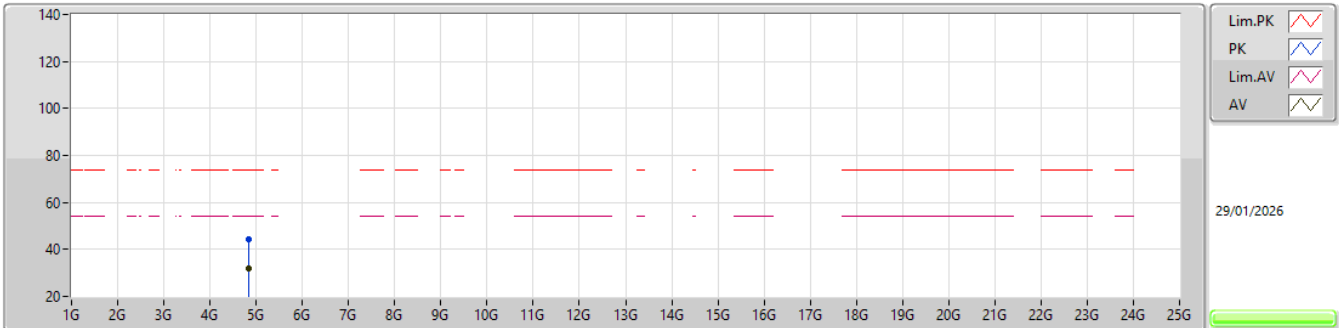EUT Y_1TX
SET 19.5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.83239G	44.56	74.00	-29.44	40.30	3	Vertical	151	1.80	19.5	31.20	6.73	33.67			
AV	4.83966G	31.87	54.00	-22.13	27.60	3	Vertical	151	1.80	19.5	31.20	6.74	33.67			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2412MHz_TX

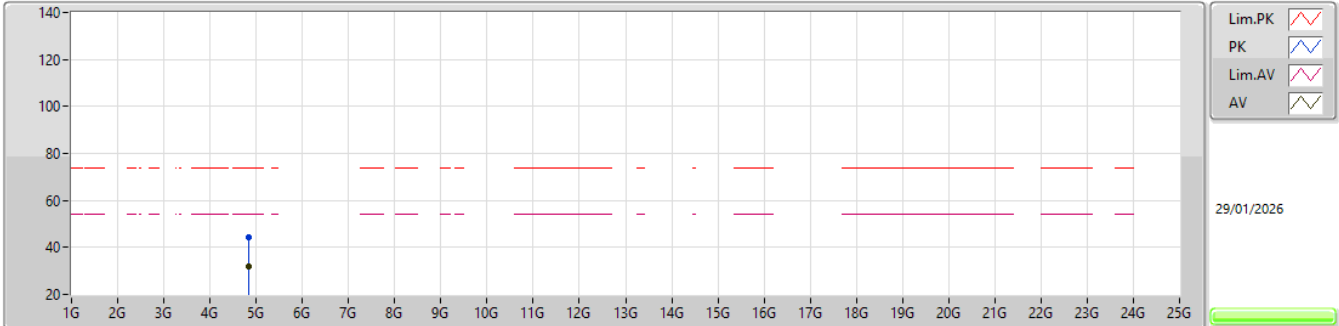


EUT_Y_1TX
SET 19.5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.83599G	44.44	74.00	-29.56	40.18	3	Horizontal	238	1.80	19.5	31.20	6.73	33.67				
AV	4.83135G	31.99	54.00	-22.01	27.73	3	Horizontal	238	1.80	19.5	31.20	6.73	33.67				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2417MHz_TX

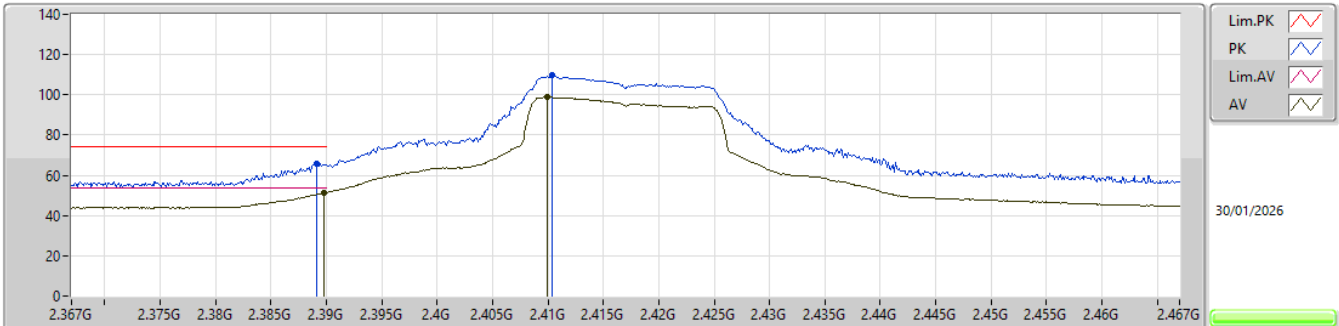


EUT_Y_1TX
SET 22.5
19.5\27\18.5\22.5\24.5\23.5\23\22.5
7.68\11.99\8.53\2.53\6.03\2.58\0.80\2.41

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3891G	65.90	74.00	-8.10	33.61	3	Vertical	350	1.99	22.5	27.29	5.00	-				
AV	2.3898G	51.59	54.00	-2.41	19.29	3	Vertical	350	1.99	22.5	27.30	5.00	-				
PK	2.4104G	109.58	Inf	-Inf	77.06	3	Vertical	350	1.99	22.5	27.50	5.02	-				
AV	2.4099G	98.91	Inf	-Inf	66.39	3	Vertical	350	1.99	22.5	27.50	5.02	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2417MHz_TX

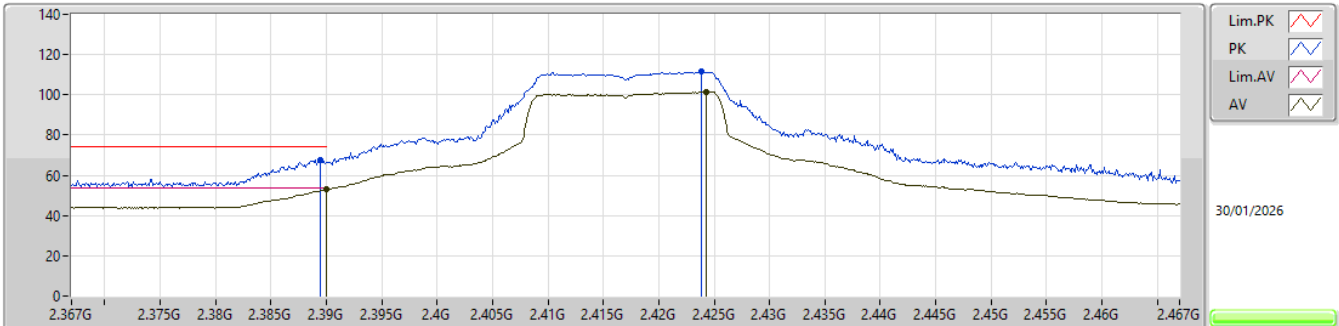


EUT_Y_1TX
SET 22.5
22.5
1.06

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3895G	67.60	74.00	-6.40	35.31	3	Horizontal	75	1.99	22.5	27.29	5.00	-				
AV	2.39G	52.94	54.00	-1.06	20.64	3	Horizontal	75	1.99	22.5	27.30	5.00	-				
PK	2.4239G	111.73	Inf	-Inf	79.15	3	Horizontal	75	1.99	22.5	27.54	5.04	-				
AV	2.4243G	101.66	Inf	-Inf	69.08	3	Horizontal	75	1.99	22.5	27.54	5.04	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

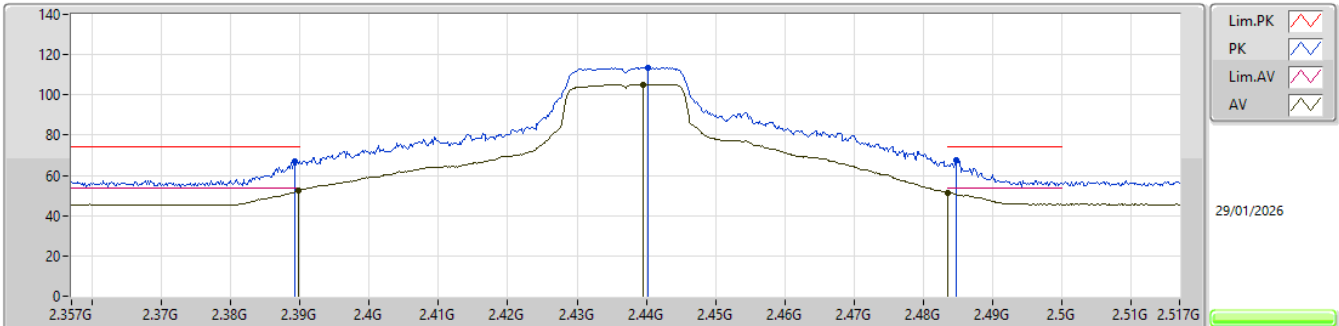


EUT_Y_1TX
SET 27
19.5\27
8.20\1.61

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38916G	67.21	74.00	-6.79	35.08	3	Vertical	360	1.50	27	27.60	4.53	-				
AV	2.3898G	52.39	54.00	-1.61	20.26	3	Vertical	360	1.50	27	27.60	4.53	-				
PK	2.4402G	113.50	Inf	-Inf	81.50	3	Vertical	360	1.50	27	27.40	4.60	-				
AV	2.43956G	105.26	Inf	-Inf	73.26	3	Vertical	360	1.50	27	27.40	4.60	-				
PK	2.48484G	67.40	74.00	-6.60	35.28	3	Vertical	360	1.50	27	27.45	4.67	-				
AV	2.4835G	51.48	54.00	-2.52	19.38	3	Vertical	360	1.50	27	27.43	4.67	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

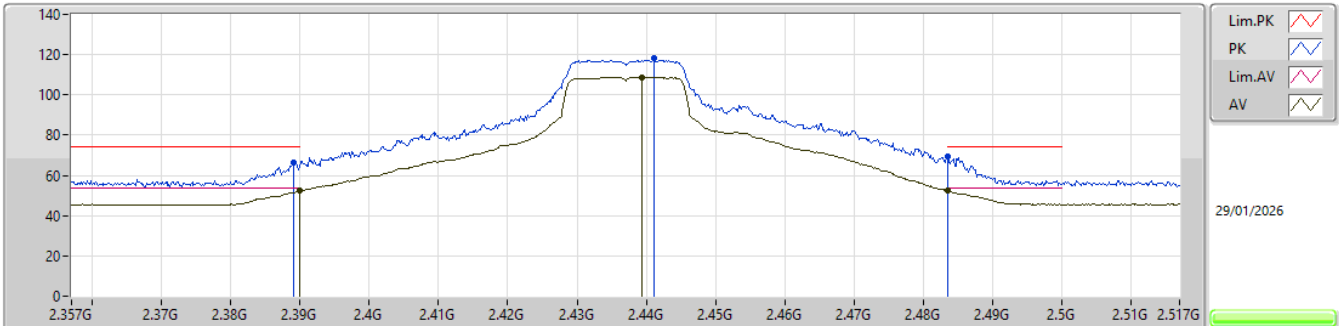


EUT_V_1TX
SET 27
27
1.44

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.389G	66.62	74.00	-7.38	34.49	3	Horizontal	64	1.98	27	27.60	4.53	-			
AV	2.38996G	52.29	54.00	-1.71	20.16	3	Horizontal	64	1.98	27	27.60	4.53	-			
PK	2.44116G	118.24	Inf	-Inf	86.24	3	Horizontal	64	1.98	27	27.40	4.60	-			
AV	2.4394G	108.69	Inf	-Inf	76.68	3	Horizontal	64	1.98	27	27.41	4.60	-			
PK	2.4835G	69.63	74.00	-4.37	37.53	3	Horizontal	64	1.98	27	27.43	4.67	-			
AV	2.4835G	52.56	54.00	-1.44	20.46	3	Horizontal	64	1.98	27	27.43	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

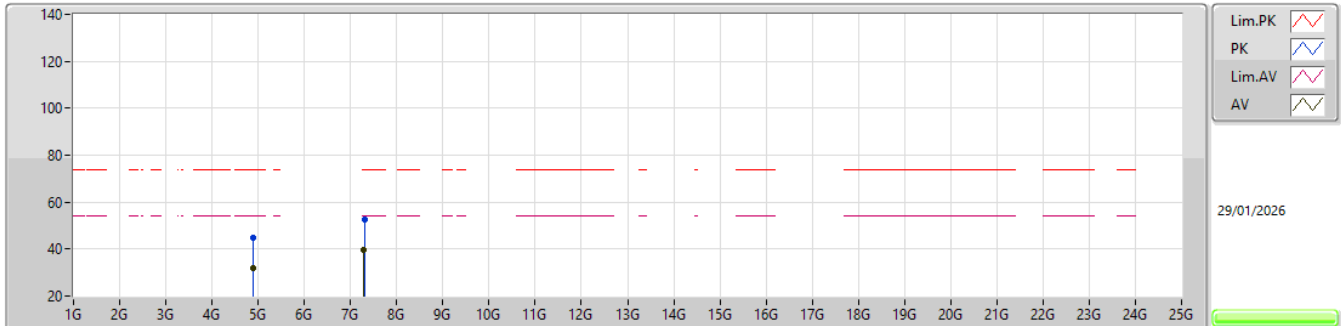


EUT_Y_1TX
SET 27

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.8921G	44.77	74.00	-29.23	40.55	3	Vertical	91	1.80	27	31.12	6.77	33.67				
AV	4.88043G	31.86	54.00	-22.14	27.63	3	Vertical	91	1.80	27	31.14	6.76	33.67				
PK	7.30676G	52.50	74.00	-21.50	40.71	3	Vertical	0	1.58	27	36.59	8.73	33.53				
AV	7.29166G	39.84	54.00	-14.16	28.11	3	Vertical	0	1.58	27	36.57	8.69	33.53				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2437MHz_TX

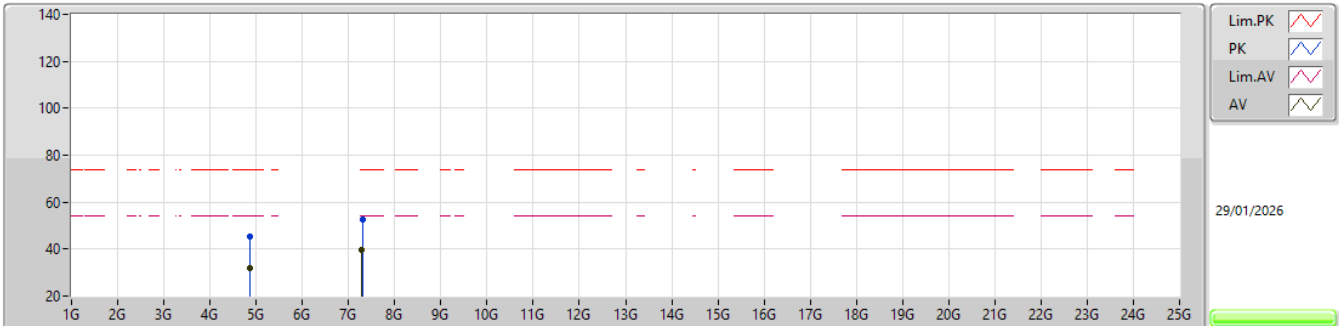


EUT_Y_1TX
SET 27

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.86329G	45.27	74.00	-28.73	41.02	3	Horizontal	116	1.80	27	31.17	6.75	33.67				
AV	4.86889G	31.94	54.00	-22.06	27.70	3	Horizontal	116	1.80	27	31.16	6.75	33.67				
PK	7.3114G	52.61	74.00	-21.39	40.82	3	Horizontal	330	1.80	27	36.58	8.75	33.54				
AV	7.29358G	39.84	54.00	-14.16	28.10	3	Horizontal	330	1.80	27	36.57	8.70	33.53				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2457MHz_TX

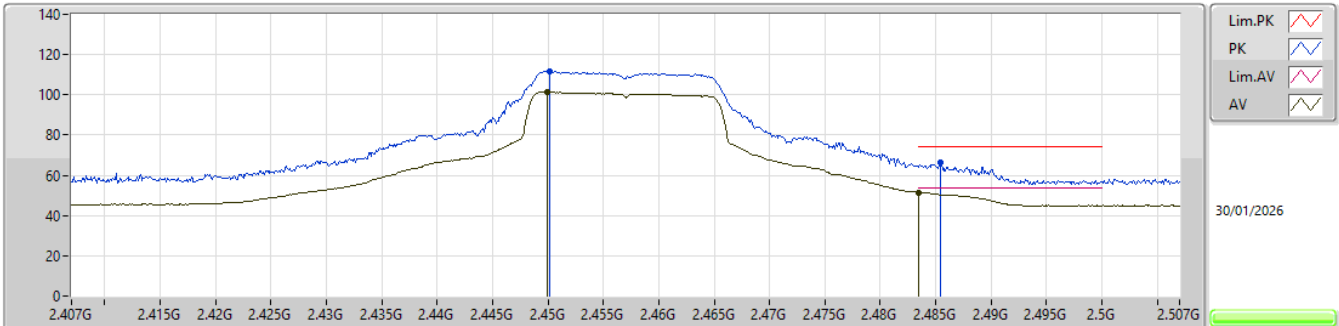


EUT_Y_1TX
SET 23.5
19.5\26.5\19\22.5\24\23.5
7.38\7.88\7.70\4.93\0.29\2.64

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4502G	111.85	Inf	-Inf	79.17	3	Vertical	360	1.61	23.5	27.60	5.08	-				
AV	2.4499G	101.53	Inf	-Inf	68.85	3	Vertical	360	1.61	23.5	27.60	5.08	-				
PK	2.4854G	66.10	74.00	-7.90	33.12	3	Vertical	360	1.61	23.5	27.85	5.13	-				
AV	2.4835G	51.36	54.00	-2.64	18.39	3	Vertical	360	1.61	23.5	27.84	5.13	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2457MHz_TX

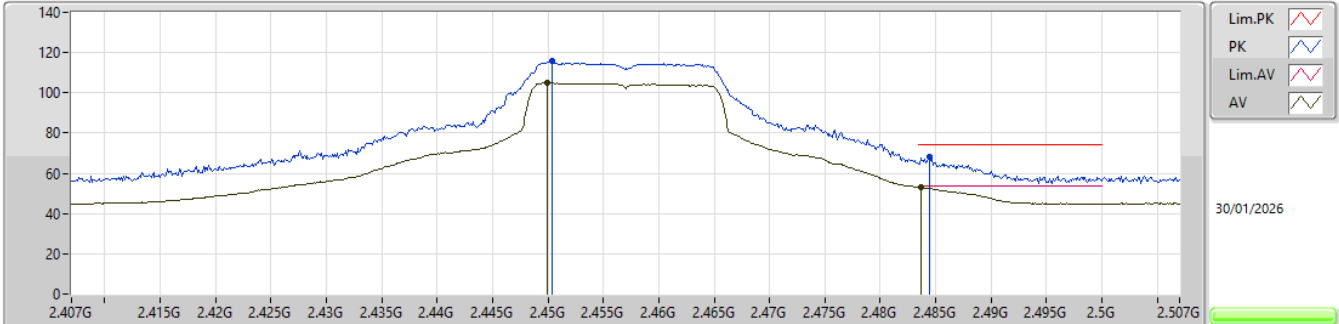


EUT_Y_1TX
SET 22.5
23.5\21\22\22.5\23\22.5
-2.14\3.33\1.94\1.05\0.04\1.02

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4504G	115.70	Inf	-Inf	83.02	3	Horizontal	58	1.96	22.5	27.60	5.08	-				
AV	2.4499G	105.01	Inf	-Inf	72.33	3	Horizontal	58	1.96	22.5	27.60	5.08	-				
PK	2.4844G	68.00	74.00	-6.00	35.03	3	Horizontal	58	1.96	22.5	27.84	5.13	-				
AV	2.4837G	52.98	54.00	-1.02	20.01	3	Horizontal	58	1.96	22.5	27.84	5.13	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

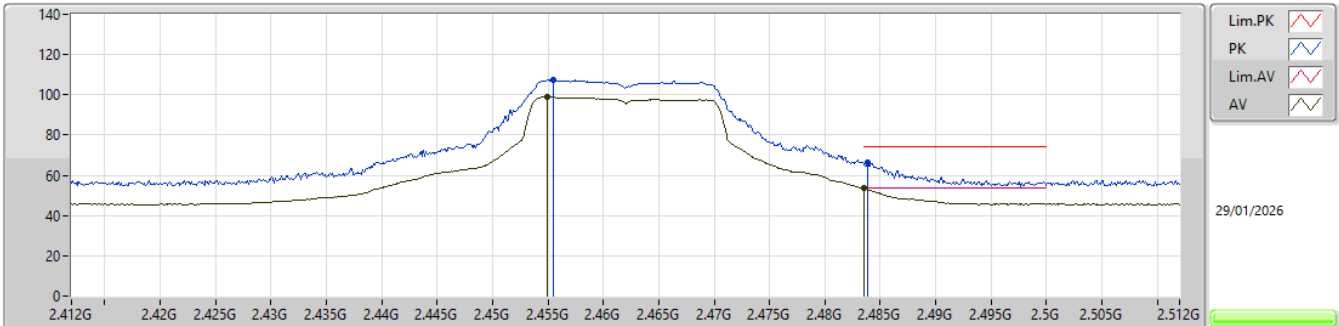


EUT_Y_1TX
SET 20.5
19.5\21.5\20.5
2.47\1.54\0.44

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4555G	107.71	Inf	-Inf	75.69	3	Vertical	348	1.56	20.5	27.40	4.62	-				
AV	2.4549G	98.84	Inf	-Inf	66.82	3	Vertical	348	1.56	20.5	27.40	4.62	-				
PK	2.4838G	66.32	74.00	-7.68	34.21	3	Vertical	348	1.56	20.5	27.44	4.67	-				
AV	2.4835G	53.56	54.00	-0.44	21.46	3	Vertical	348	1.56	20.5	27.43	4.67	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

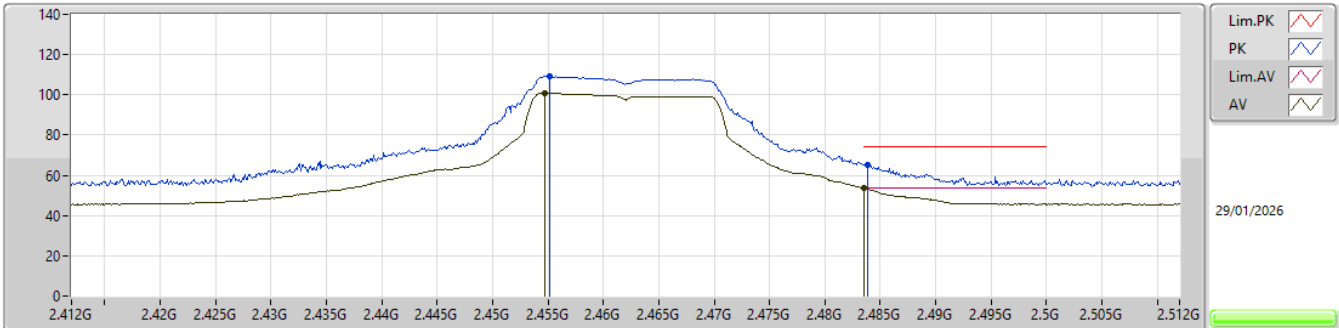


EUT_Y_1TX
SET 19.5
20.5\18.5\19.5
-1.73\2.49\0.43

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4551G	109.24	Inf	-Inf	77.22	3	Horizontal	53	1.73	19.5	27.40	4.62	-				
AV	2.4547G	100.89	Inf	-Inf	68.87	3	Horizontal	53	1.73	19.5	27.40	4.62	-				
PK	2.4839G	65.43	74.00	-8.57	33.32	3	Horizontal	53	1.73	19.5	27.44	4.67	-				
AV	2.4835G	53.57	54.00	-0.43	21.47	3	Horizontal	53	1.73	19.5	27.43	4.67	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

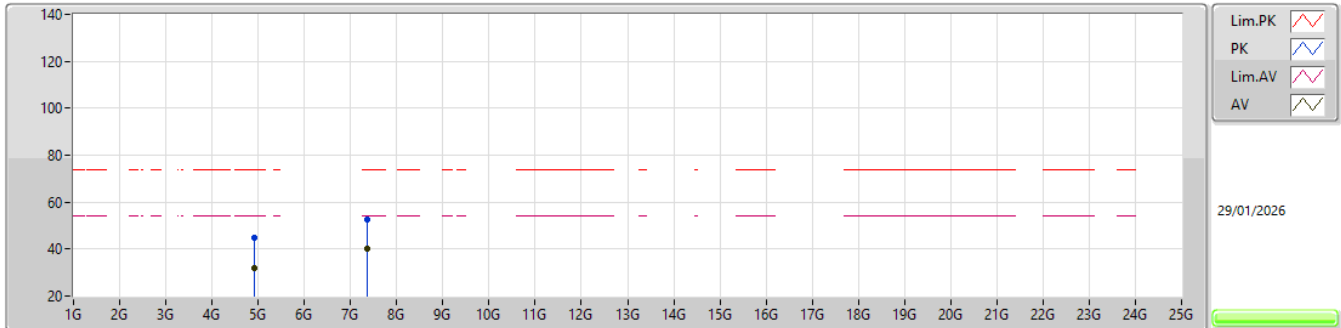


EUT Y_1TX
SET 19.5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91813G	44.81	74.00	-29.19	40.48	3	Vertical	89	1.80	19.5	31.21	6.79	33.67				
AV	4.90722G	31.91	54.00	-22.09	27.66	3	Vertical	89	1.80	19.5	31.14	6.78	33.67				
PK	7.36934G	52.66	74.00	-21.34	40.86	3	Vertical	271.1	1.80	19.5	36.46	8.90	33.56				
AV	7.36782G	39.94	54.00	-14.06	28.15	3	Vertical	271.1	1.80	19.5	36.46	8.89	33.56				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_1TX

2462MHz_TX

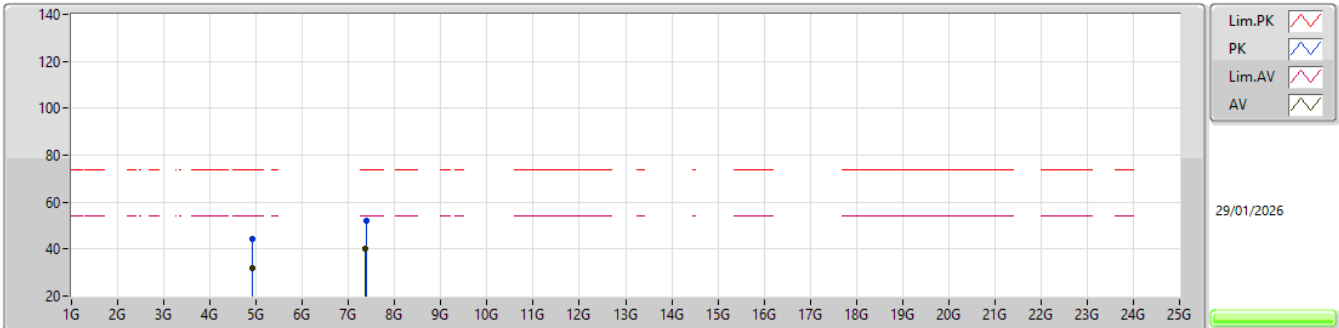


EUT Y_1TX
SET 19.5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91713G	44.55	74.00	-29.45	40.23	3	Horizontal	256	1.80	19.5	31.20	6.79	33.67				
AV	4.923G	31.98	54.00	-22.02	27.62	3	Horizontal	256	1.80	19.5	31.24	6.79	33.67				
PK	7.39883G	52.26	74.00	-21.74	40.46	3	Horizontal	103	1.80	19.5	36.40	8.98	33.58				
AV	7.36862G	40.04	54.00	-13.96	28.24	3	Horizontal	103	1.80	19.5	36.46	8.90	33.56				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2412MHz_TX

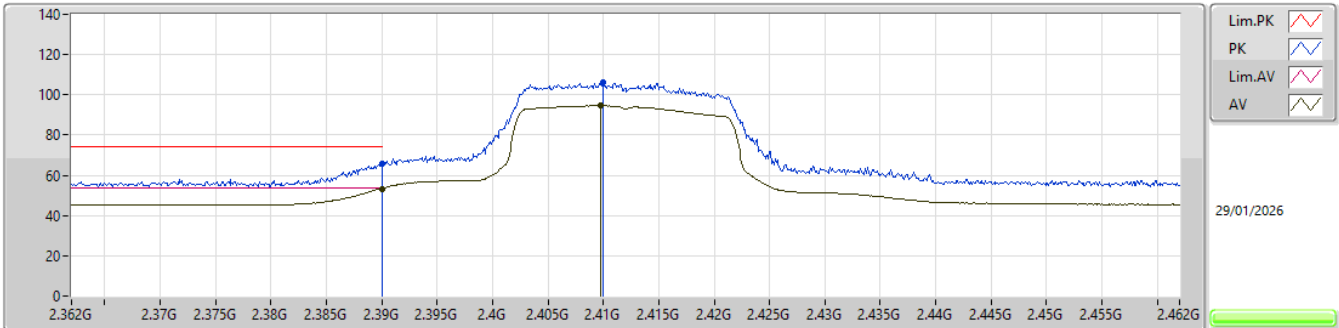


EUT_Y_1TX
SET 18
15\19\17\18\18.5\18
4.48\1.12\2.02\0.59\0.03\0.69

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.39G	66.02	74.00	-7.98	33.89	3	Vertical	346	1.90	18	27.60	4.53	-				
AV	2.39G	53.31	54.00	-0.69	21.18	3	Vertical	346	1.90	18	27.60	4.53	-				
PK	2.41G	106.17	Inf	-Inf	74.11	3	Vertical	346	1.90	18	27.50	4.56	-				
AV	2.4097G	94.56	Inf	-Inf	62.51	3	Vertical	346	1.90	18	27.50	4.55	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2412MHz_TX

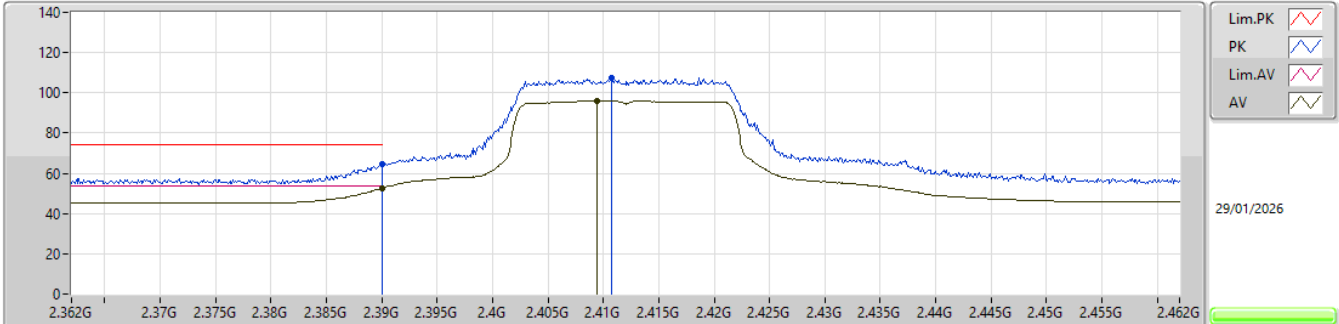


EUT Y_1TX
SET 18
18
1.47

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.39G	64.43	74.00	-9.57	32.30	3	Horizontal	64	1.62	18	27.60	4.53	-				
AV	2.39G	52.53	54.00	-1.47	20.40	3	Horizontal	64	1.62	18	27.60	4.53	-				
PK	2.4107G	107.60	Inf	-Inf	75.54	3	Horizontal	64	1.62	18	27.50	4.56	-				
AV	2.4094G	95.97	Inf	-Inf	63.91	3	Horizontal	64	1.62	18	27.51	4.55	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2412MHz_TX

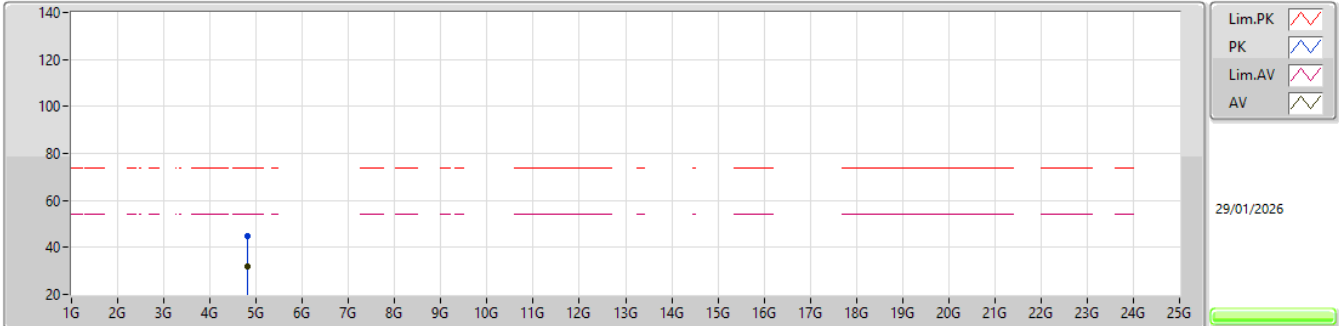


EUT_Y_1TX
SET 18

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.8198G	44.58	74.00	-29.42	40.33	3	Vertical	173	1.80	18	31.20	6.72	33.67			
AV	4.81773G	31.89	54.00	-22.11	27.64	3	Vertical	173	1.80	18	31.20	6.72	33.67			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2412MHz_TX

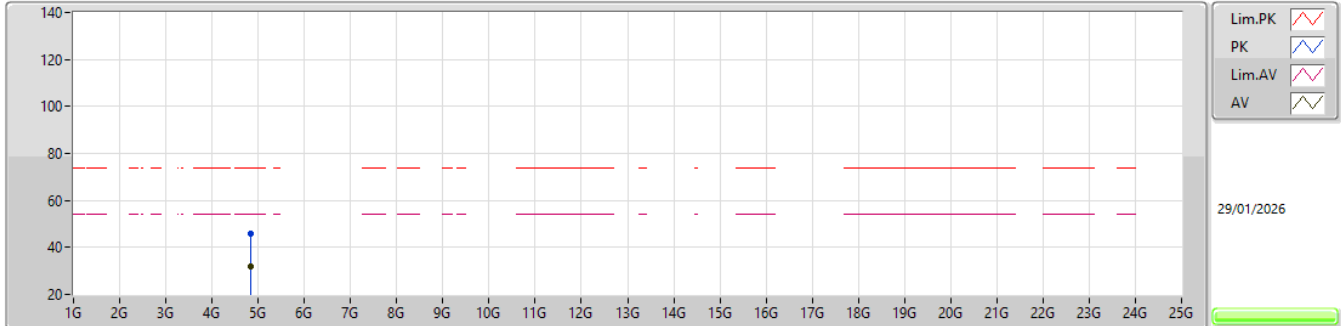


EUT_Y_1TX
SET 18

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.83599G	45.80	74.00	-28.20	41.54	3	Horizontal	7	2.70	18	31.20	6.73	33.67			
AV	4.82987G	31.98	54.00	-22.02	27.72	3	Horizontal	7	2.70	18	31.20	6.73	33.67			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2417MHz_TX

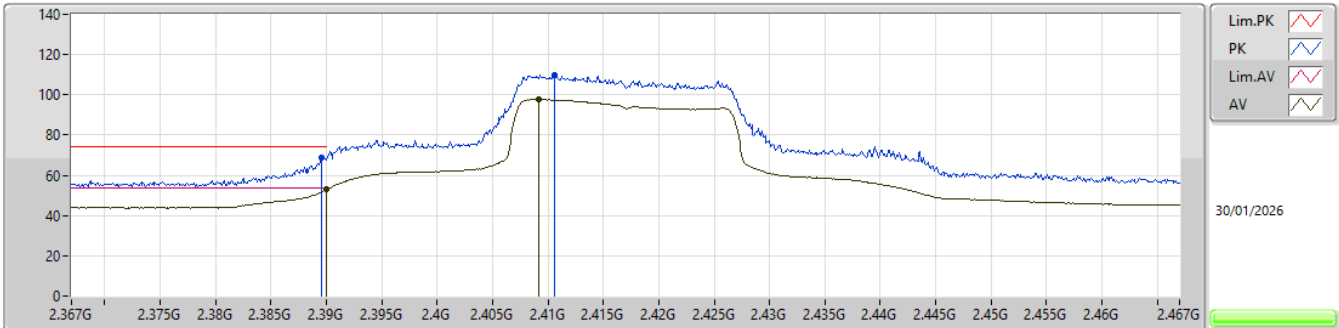


EUT_Y_1TX
SET 21.5
18\24.5\17\20.5\22\21.5
6.65\ -9.41\7.60\3.02\ -0.28\1.19

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3896G	68.71	74.00	-5.29	36.41	3	Vertical	350	1.98	21.5	27.30	5.00	-				
AV	2.39G	52.81	54.00	-1.19	20.51	3	Vertical	350	1.98	21.5	27.30	5.00	-				
PK	2.4106G	109.96	Inf	-Inf	77.44	3	Vertical	350	1.98	21.5	27.50	5.02	-				
AV	2.4092G	97.71	Inf	-Inf	65.20	3	Vertical	350	1.98	21.5	27.49	5.02	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2417MHz_TX

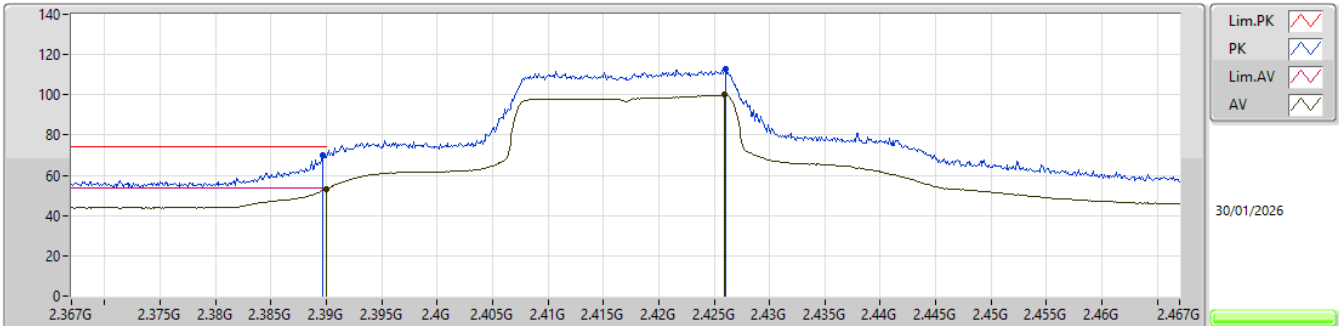


EUT_Y_1TX
SET 21.5
21.5
0.84

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3897G	69.90	74.00	-4.10	37.60	3	Horizontal	64	1.80	21.5	27.30	5.00	-				
AV	2.39G	53.16	54.00	-0.84	20.86	3	Horizontal	64	1.80	21.5	27.30	5.00	-				
PK	2.426G	112.66	Inf	-Inf	80.05	3	Horizontal	64	1.80	21.5	27.56	5.05	-				
AV	2.4259G	100.00	Inf	-Inf	67.39	3	Horizontal	64	1.80	21.5	27.56	5.05	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2437MHz_TX

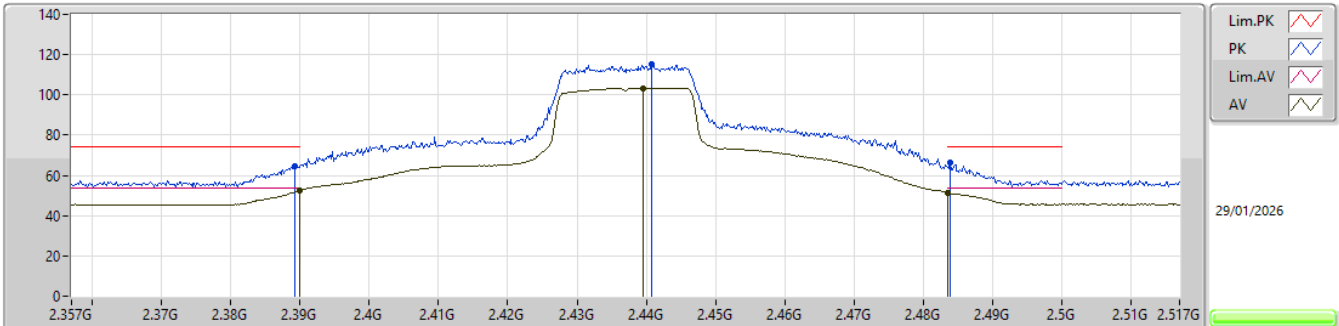


EUT_Y_1TX
SET 26
18\26\27\26.5\26
8.29\1.35\2.28\0.01\1.47

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.38932G	64.50	74.00	-9.50	32.37	3	Vertical	356	1.50	26	27.60	4.53	-
AV	2.38996G	52.53	54.00	-1.47	20.40	3	Vertical	356	1.50	26	27.60	4.53	-
PK	2.44084G	114.98	Inf	-Inf	82.98	3	Vertical	356	1.50	26	27.40	4.60	-
AV	2.43956G	103.35	Inf	-Inf	71.35	3	Vertical	356	1.50	26	27.40	4.60	-
PK	2.48388G	66.10	74.00	-7.90	33.99	3	Vertical	356	1.50	26	27.44	4.67	-
AV	2.4835G	51.45	54.00	-2.55	19.35	3	Vertical	356	1.50	26	27.43	4.67	-

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2437MHz_TX

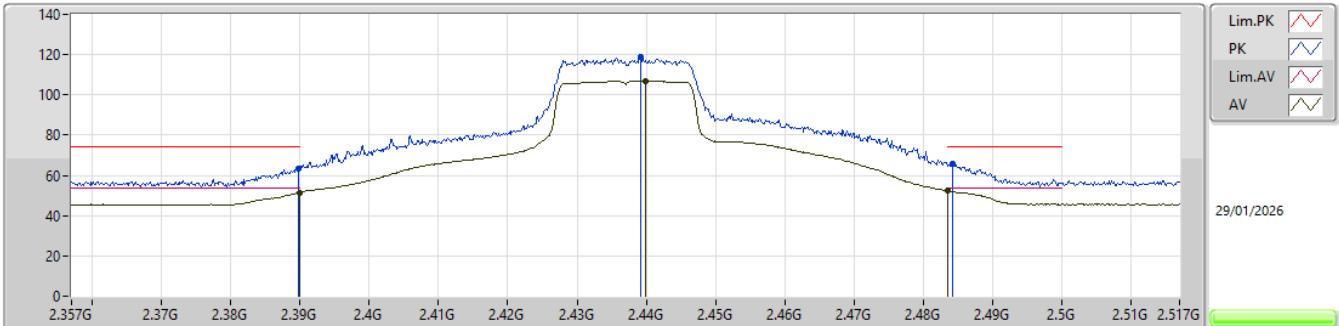


EUT_Y_1TX
SET 26
26
1.56

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	2.3898G	63.18	74.00	-10.82	31.05	3	Horizontal	54	1.80	26	27.60	4.53	-					
AV	2.38996G	51.44	54.00	-2.56	19.31	3	Horizontal	54	1.80	26	27.60	4.53	-					
PK	2.43924G	118.69	Inf	-Inf	86.68	3	Horizontal	54	1.80	26	27.41	4.60	-					
AV	2.43988G	106.89	Inf	-Inf	74.89	3	Horizontal	54	1.80	26	27.40	4.60	-					
PK	2.4842G	65.92	74.00	-8.08	33.81	3	Horizontal	54	1.80	26	27.44	4.67	-					
AV	2.4835G	52.44	54.00	-1.56	20.34	3	Horizontal	54	1.80	26	27.43	4.67	-					

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2437MHz_TX

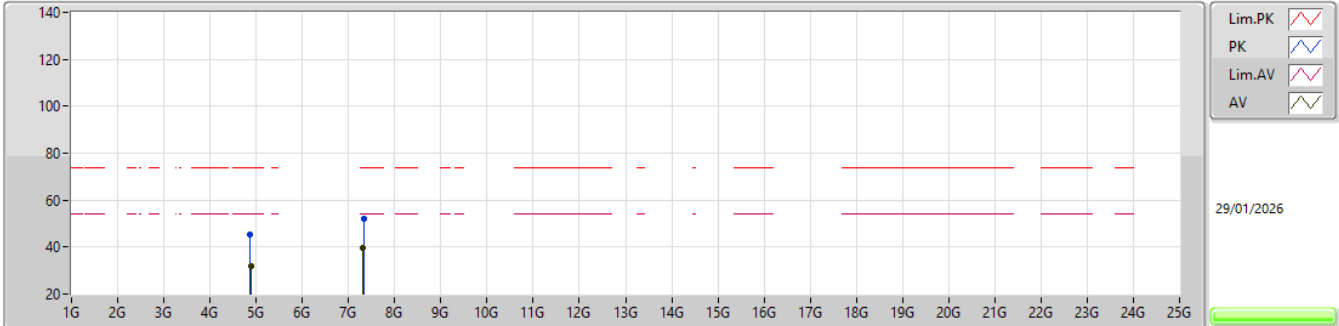


EUT_Y_1TX
SET 26

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.85814G	45.10	74.00	-28.90	40.84	3	Vertical	360	1.80	26	31.18	6.75	33.67				
AV	4.88339G	31.85	54.00	-22.15	27.63	3	Vertical	360	1.80	26	31.13	6.76	33.67				
PK	7.32826G	52.10	74.00	-21.90	40.31	3	Vertical	94	1.80	26	36.54	8.79	33.54				
AV	7.29845G	39.83	54.00	-14.17	28.06	3	Vertical	94	1.80	26	36.59	8.71	33.53				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX


2437MHz_TX

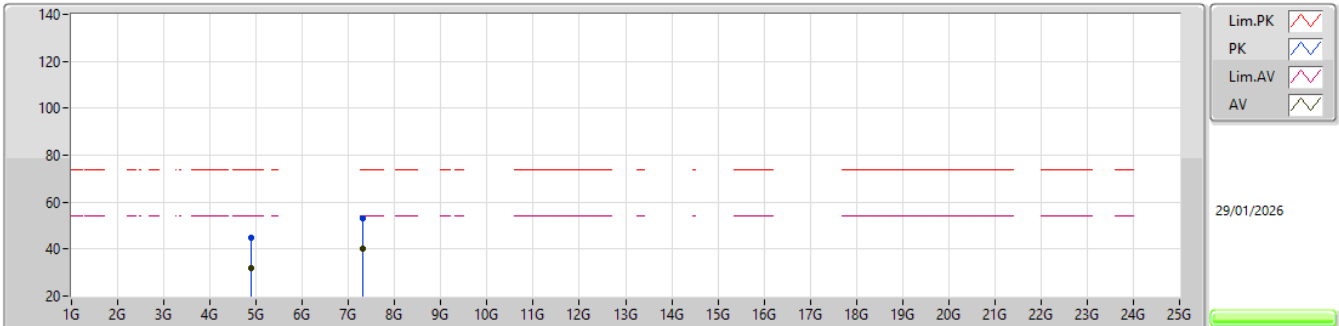EUT Y_1TX
SET 26

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.88591G	44.65	74.00	-29.35	40.42	3	Horizontal	164	1.80	26	31.13	6.77	33.67				
AV	4.88299G	31.77	54.00	-22.23	27.55	3	Horizontal	164	1.80	26	31.13	6.76	33.67				
PK	7.314G	53.12	74.00	-20.88	41.34	3	Horizontal	78	2.01	26	36.57	8.75	33.54				
AV	7.312G	39.98	54.00	-14.02	28.19	3	Horizontal	78	2.01	26	36.58	8.75	33.54				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2457MHz_TX

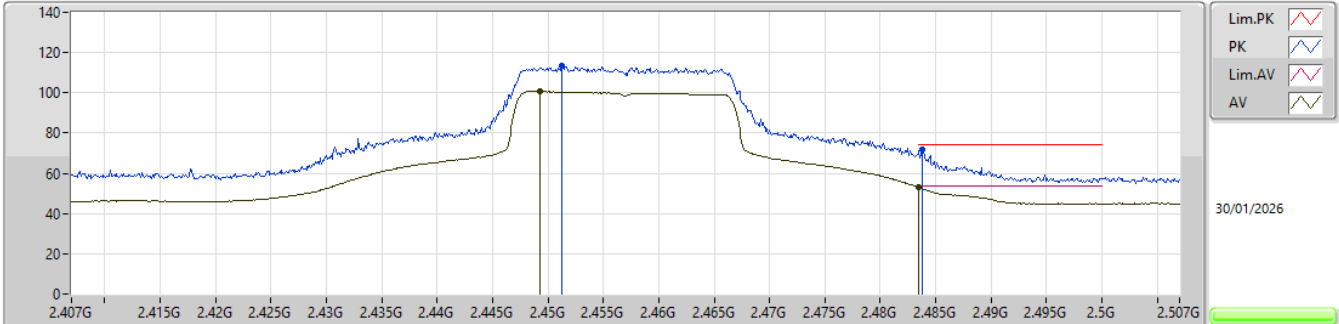


EUT_Y_1TX
SET 22.5
18\25\18.5\21.5\23\22.5
7.35\6.77\6.73\2.83\0.18\1.15

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4513G	113.15	Inf	-Inf	80.47	3	Vertical	355	1.60	22.5	27.60	5.08	-				
AV	2.4493G	100.70	Inf	-Inf	68.03	3	Vertical	355	1.60	22.5	27.59	5.08	-				
PK	2.4838G	71.59	74.00	-2.41	38.62	3	Vertical	355	1.60	22.5	27.84	5.13	-				
AV	2.4835G	52.85	54.00	-1.15	19.88	3	Vertical	355	1.60	22.5	27.84	5.13	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2457MHz_TX

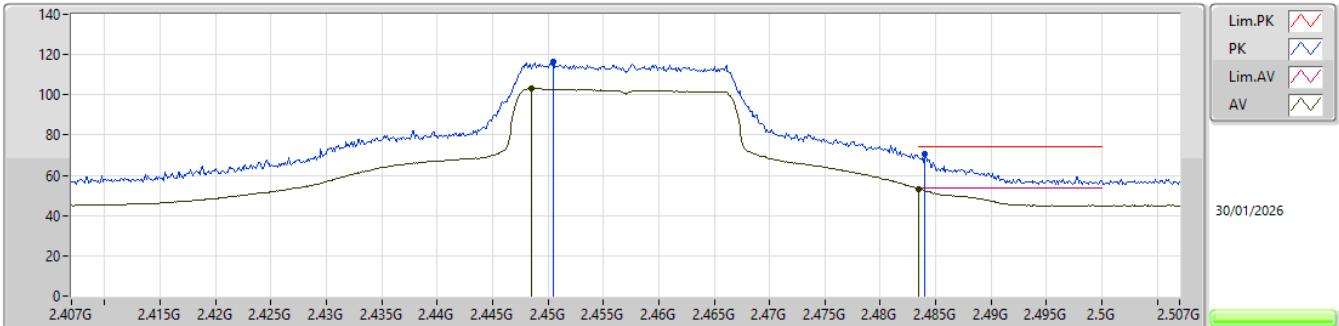


EUT_Y_1TX
SET 21
22.5\20.5\21.5\21
-1.87\1.71\0.13\0.82

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4505G	116.24	Inf	-Inf	83.56	3	Horizontal	61	1.98	21	27.60	5.08	-				
AV	2.4485G	103.04	Inf	-Inf	70.37	3	Horizontal	61	1.98	21	27.59	5.08	-				
PK	2.484G	70.57	74.00	-3.43	37.60	3	Horizontal	61	1.98	21	27.84	5.13	-				
AV	2.4835G	53.18	54.00	-0.82	20.21	3	Horizontal	61	1.98	21	27.84	5.13	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2462MHz_TX

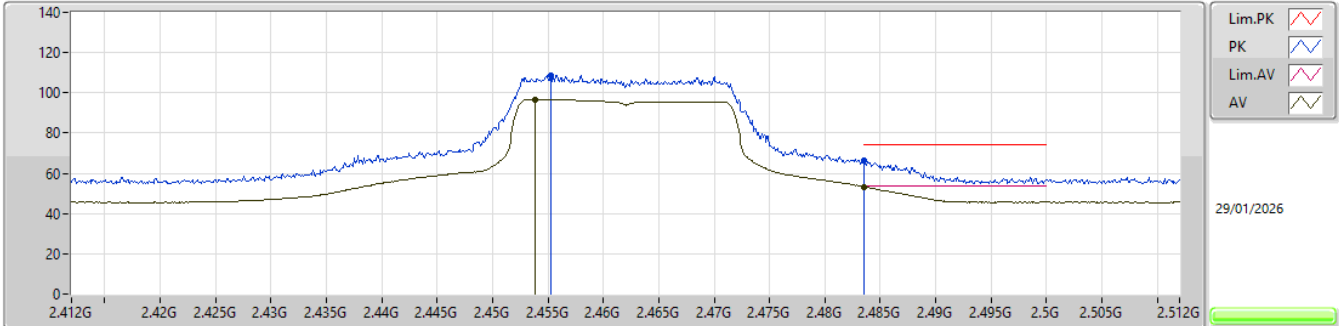


EUT_Y_1TX
SET 19
18\20.5\19.5\19
2.84\ -3.30\ -0.65\ 0.78

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4553G	108.70	Inf	-Inf	76.68	3	Vertical	348	1.55	19	27.40	4.62	-				
AV	2.4538G	96.80	Inf	-Inf	64.78	3	Vertical	348	1.55	19	27.40	4.62	-				
PK	2.4835G	66.40	74.00	-7.60	34.30	3	Vertical	348	1.55	19	27.43	4.67	-				
AV	2.4835G	53.22	54.00	-0.78	21.12	3	Vertical	348	1.55	19	27.43	4.67	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2462MHz_TX

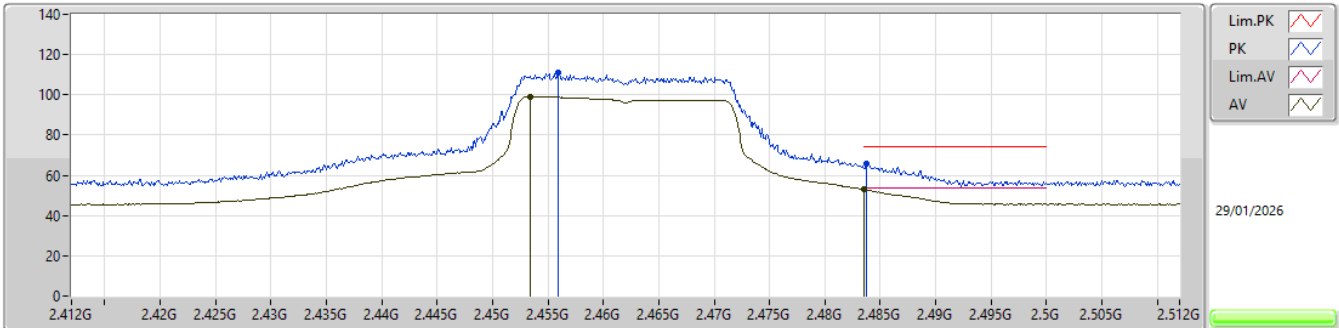


EUT_Y_1TX
SET 18
19\17\18\18.5\18
-1.57\2.74\0.97\0.44\1.04

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4559G	110.95	Inf	-Inf	78.93	3	Horizontal	52	1.74	18	27.40	4.62	-				
AV	2.4534G	99.17	Inf	-Inf	67.15	3	Horizontal	52	1.74	18	27.40	4.62	-				
PK	2.4837G	65.74	74.00	-8.26	33.63	3	Horizontal	52	1.74	18	27.44	4.67	-				
AV	2.4835G	52.96	54.00	-1.04	20.86	3	Horizontal	52	1.74	18	27.43	4.67	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2462MHz_TX

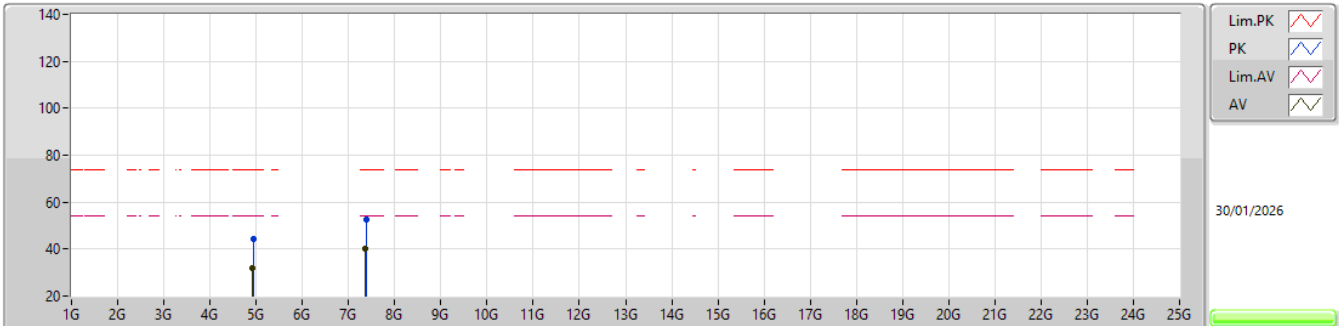


EUT_Y_1TX
SET 18

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93367G	44.47	74.00	-29.53	40.04	3	Vertical	360	1.80	18	31.30	6.80	33.67				
AV	4.90474G	31.96	54.00	-22.04	27.72	3	Vertical	360	1.80	18	31.13	6.78	33.67				
PK	7.38484G	52.38	74.00	-21.62	40.58	3	Vertical	349	2.02	18	36.43	8.94	33.57				
AV	7.3675G	40.02	54.00	-13.98	28.23	3	Vertical	349	2.02	18	36.46	8.89	33.56				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_1TX

2462MHz_TX

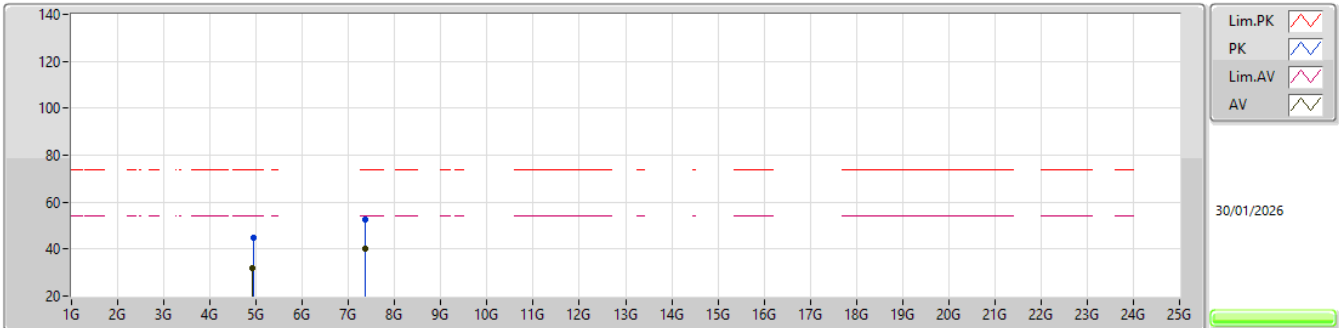


EUT Y_1TX
SET 18

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93631G	44.67	74.00	-29.33	40.22	3	Horizontal	53	1.80	18	31.32	6.80	33.67				
AV	4.90678G	31.88	54.00	-22.12	27.63	3	Horizontal	53	1.80	18	31.14	6.78	33.67				
PK	7.36662G	52.35	74.00	-21.65	40.55	3	Horizontal	211.1	1.80	18	36.47	8.89	33.56				
AV	7.3679G	39.98	54.00	-14.02	28.19	3	Horizontal	211.1	1.80	18	36.46	8.89	33.56				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

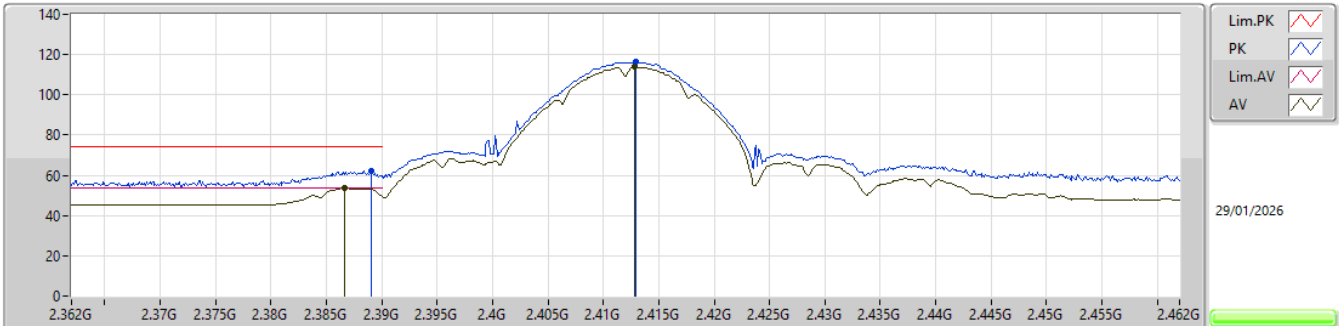


EUT Y_2TX
SET 24.5
15\23\27\25\24\24.5
8.13\2.58\19.07\0.71\1.49\0.29

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.389G	61.97	74.00	-12.03	29.84	3	Vertical	44	1.92	24.5	27.60	4.53	-				
AV	2.3866G	53.71	54.00	-0.29	21.58	3	Vertical	44	1.92	24.5	27.60	4.53	-				
PK	2.4129G	116.42	Inf	-Inf	84.36	3	Vertical	44	1.92	24.5	27.50	4.56	-				
AV	2.4128G	113.97	Inf	-Inf	81.91	3	Vertical	44	1.92	24.5	27.50	4.56	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

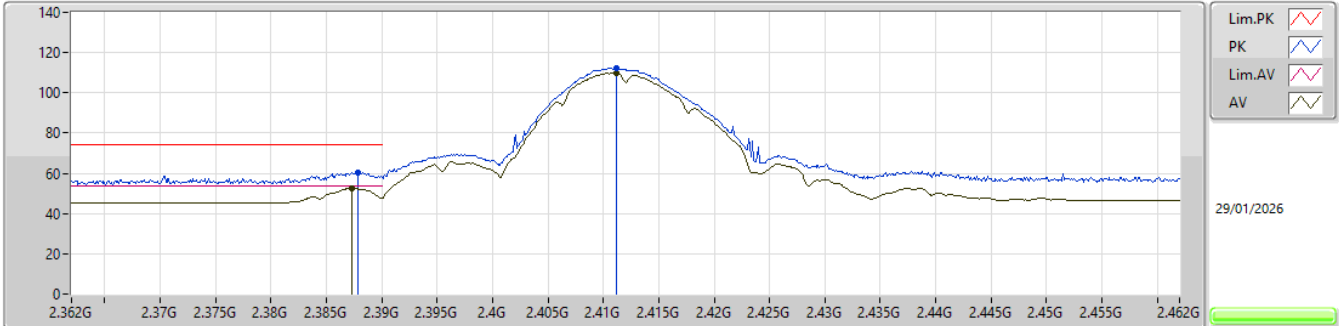


EUT_Y_2TX
SET 24.5
24.5
1.41

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3878G	60.32	74.00	-13.68	28.19	3	Horizontal	74	1.83	24.5	27.60	4.53	-				
AV	2.3873G	52.59	54.00	-1.41	20.46	3	Horizontal	74	1.83	24.5	27.60	4.53	-				
PK	2.4112G	112.42	Inf	-Inf	80.36	3	Horizontal	74	1.83	24.5	27.50	4.56	-				
AV	2.4112G	109.96	Inf	-Inf	77.90	3	Horizontal	74	1.83	24.5	27.50	4.56	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

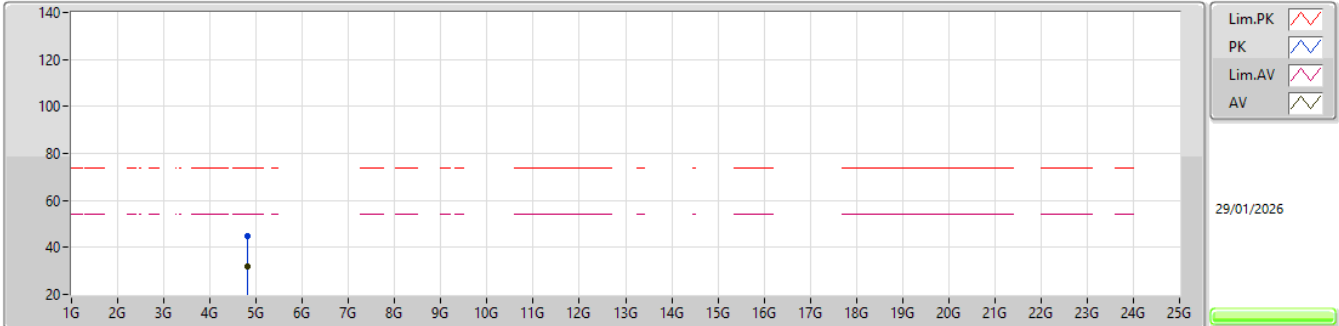


EUT_Y_2TX
SET 24.5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.81885G	45.08	74.00	-28.92	40.83	3	Vertical	61	1.80	24.5	31.20	6.72	33.67			
AV	4.821G	31.97	54.00	-22.03	27.72	3	Vertical	61	1.80	24.5	31.20	6.72	33.67			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2412MHz_TX

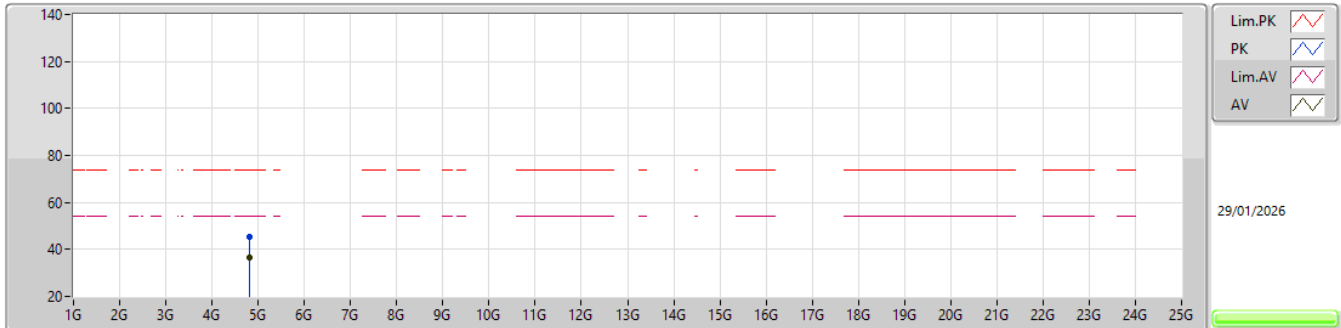


EUT_V_2TX
SET 24.5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82412G	45.43	74.00	-28.57	41.17	3	Horizontal	66	1.08	24.5	31.20	6.73	33.67			
AV	4.82404G	36.68	54.00	-17.32	32.42	3	Horizontal	66	1.08	24.5	31.20	6.73	33.67			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

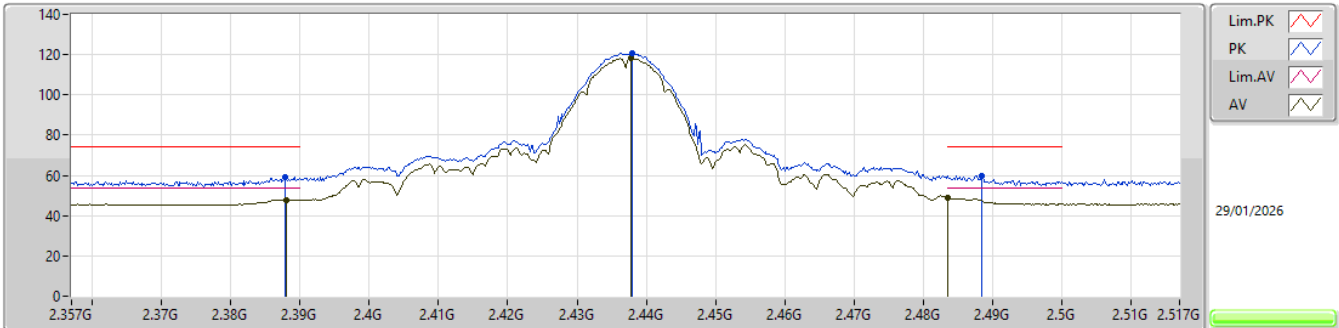


EUT_Y_2TX
SET 26
24.5\27\23.5\25\25.5\26.5\26
6.75\7.75\6.79\6.42\5.72\4.71\5.22

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38788G	59.27	74.00	-14.73	27.14	3	Vertical	43	1.99	26	27.60	4.53	-				
AV	2.38804G	47.97	54.00	-6.03	15.84	3	Vertical	43	1.99	26	27.60	4.53	-				
PK	2.43796G	120.69	Inf	-Inf	88.67	3	Vertical	43	1.99	26	27.42	4.60	-				
AV	2.4378G	118.31	Inf	-Inf	86.29	3	Vertical	43	1.99	26	27.42	4.60	-				
PK	2.48852G	60.01	74.00	-13.99	27.85	3	Vertical	43	1.99	26	27.49	4.67	-				
AV	2.4835G	48.78	54.00	-5.22	16.68	3	Vertical	43	1.99	26	27.43	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

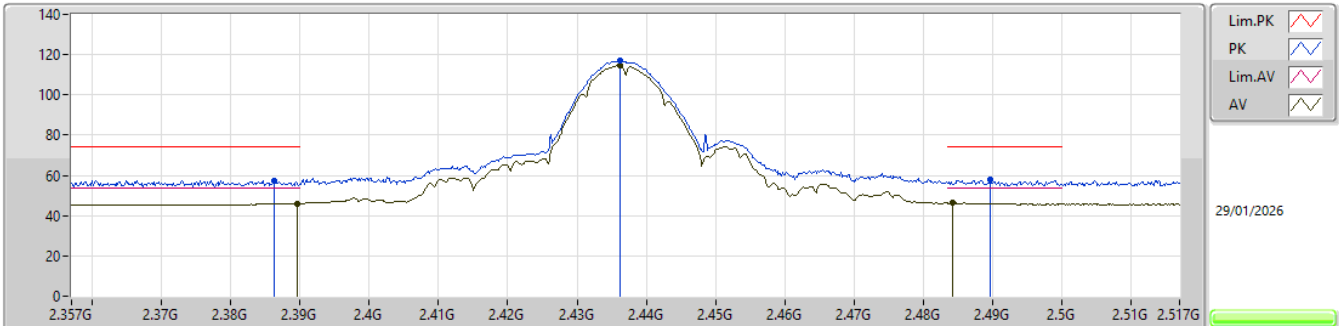


EUT_V_2TX
SET 26
26
7.78

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.38628G	57.45	74.00	-16.55	25.32	3	Horizontal	55	1.78	26	27.60	4.53	-				
AV	2.38964G	45.96	54.00	-8.04	13.83	3	Horizontal	55	1.78	26	27.60	4.53	-				
PK	2.4362G	117.18	Inf	-Inf	85.15	3	Horizontal	55	1.78	26	27.44	4.59	-				
AV	2.4362G	114.68	Inf	-Inf	82.65	3	Horizontal	55	1.78	26	27.44	4.59	-				
PK	2.48964G	57.66	74.00	-16.34	25.49	3	Horizontal	55	1.78	26	27.50	4.67	-				
AV	2.4842G	46.22	54.00	-7.78	14.11	3	Horizontal	55	1.78	26	27.44	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

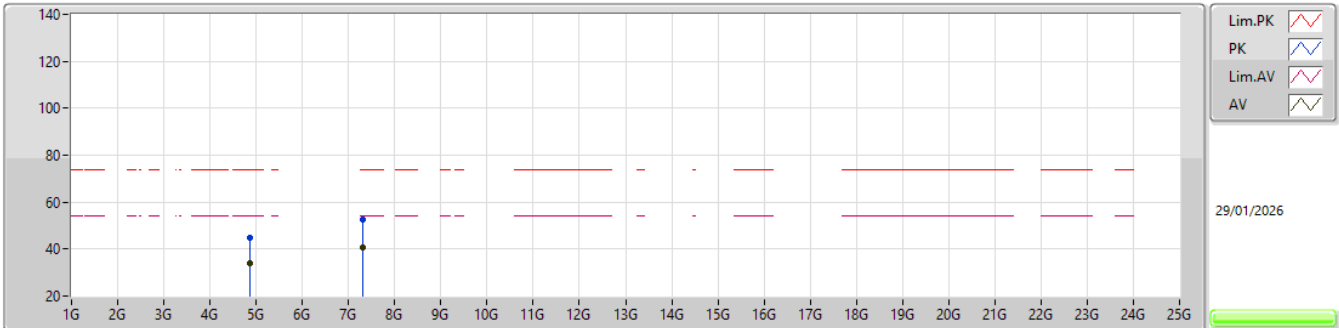


EUT Y_2TX
SET 26

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.87368G	44.70	74.00	-29.30	40.46	3	Vertical	68	2.00	26	31.15	6.76	33.67				
AV	4.874G	33.84	54.00	-20.16	29.60	3	Vertical	68	2.00	26	31.15	6.76	33.67				
PK	7.29693G	52.79	74.00	-21.21	41.02	3	Vertical	51	1.80	26	36.59	8.71	33.53				
AV	7.3102G	40.88	54.00	-13.12	29.10	3	Vertical	51	1.80	26	36.58	8.74	33.54				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2437MHz_TX

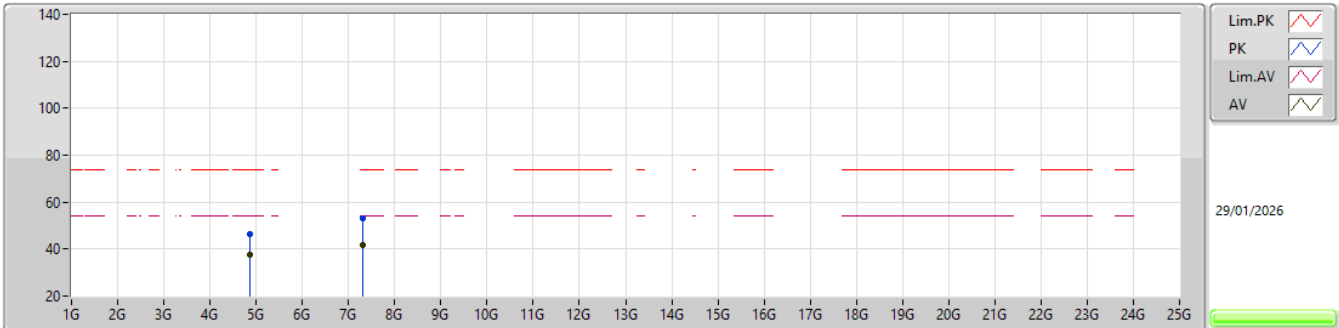


EUT_Y_2TX
SET 26

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87392G	46.30	74.00	-27.70	42.06	3	Horizontal	63	2.02	26	31.15	6.76	33.67				
AV	4.874G	37.72	54.00	-16.28	33.48	3	Horizontal	63	2.02	26	31.15	6.76	33.67				
PK	7.30996G	53.14	74.00	-20.86	41.36	3	Horizontal	67	2.10	26	36.58	8.74	33.54				
AV	7.3118G	41.57	54.00	-12.43	29.78	3	Horizontal	67	2.10	26	36.58	8.75	33.54				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2457MHz_TX

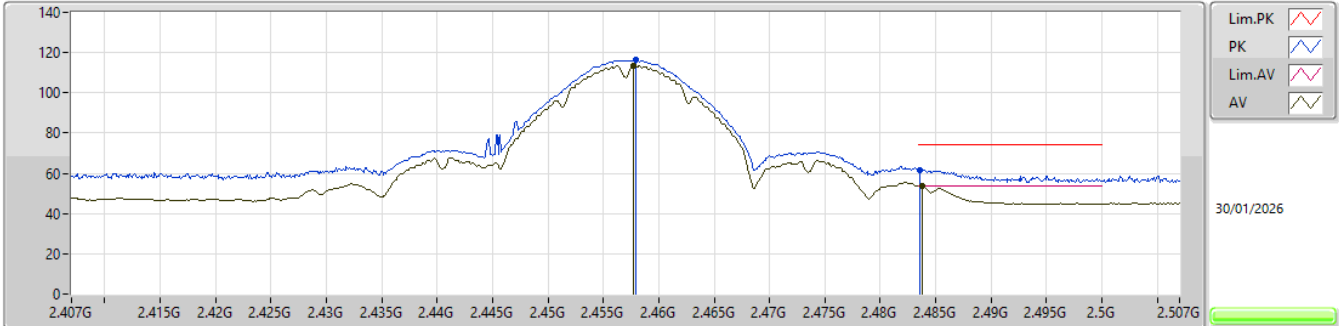


EUT_V_2TX
SET 23
22\24\23
2.18\1.95\0.27

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4579G	116.17	Inf	-Inf	83.48	3	Vertical	47	1.80	23	27.60	5.09	-				
AV	2.4577G	113.60	Inf	-Inf	80.91	3	Vertical	47	1.80	23	27.60	5.09	-				
PK	2.4836G	61.76	74.00	-12.24	28.79	3	Vertical	47	1.80	23	27.84	5.13	-				
AV	2.4838G	53.73	54.00	-0.27	20.76	3	Vertical	47	1.80	23	27.84	5.13	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2457MHz_TX

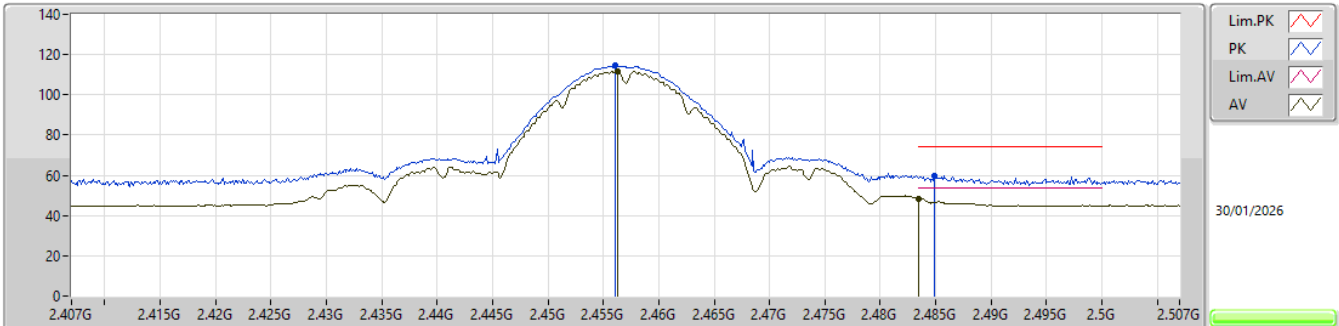


EUT_Y_2TX
SET 23
23
5.46

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4561G	114.52	Inf	-Inf	81.83	3	Horizontal	43	1.80	23	27.60	5.09	-				
AV	2.4563G	111.79	Inf	-Inf	79.10	3	Horizontal	43	1.80	23	27.60	5.09	-				
PK	2.4849G	59.87	74.00	-14.13	26.89	3	Horizontal	43	1.80	23	27.85	5.13	-				
AV	2.4835G	48.54	54.00	-5.46	15.57	3	Horizontal	43	1.80	23	27.84	5.13	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

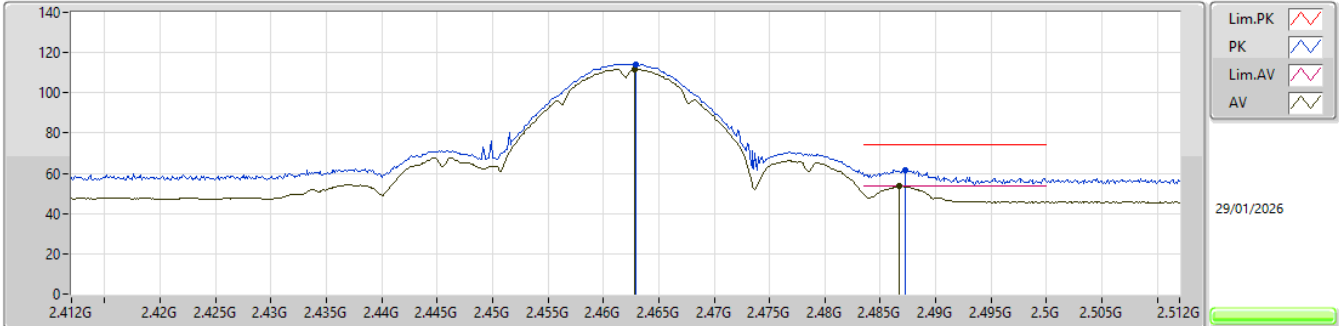

EUT Y_2TX
SET 22
24.5\19.5\24\22
-4.95\5.37\ -4.53\0.29

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.4629G	114.32	Inf	-Inf	82.29	3	Vertical	44	1.93	22	27.40	4.63	-				
AV	2.4628G	111.91	Inf	-Inf	79.88	3	Vertical	44	1.93	22	27.40	4.63	-				
PK	2.4872G	61.66	74.00	-12.34	29.52	3	Vertical	44	1.93	22	27.47	4.67	-				
AV	2.4867G	53.71	54.00	-0.29	21.57	3	Vertical	44	1.93	22	27.47	4.67	-				