





Test Mode : 802.11ax40

Test Channel : 09


100kHz PSD reference Level

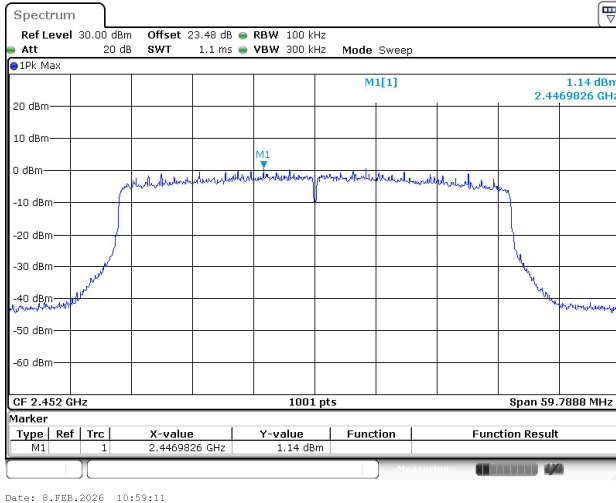


Channel 09 Plot

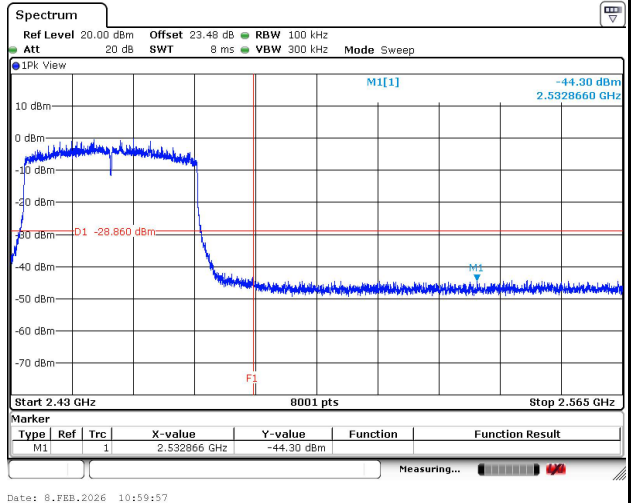

Spurious Emission 30MHz~1GHz

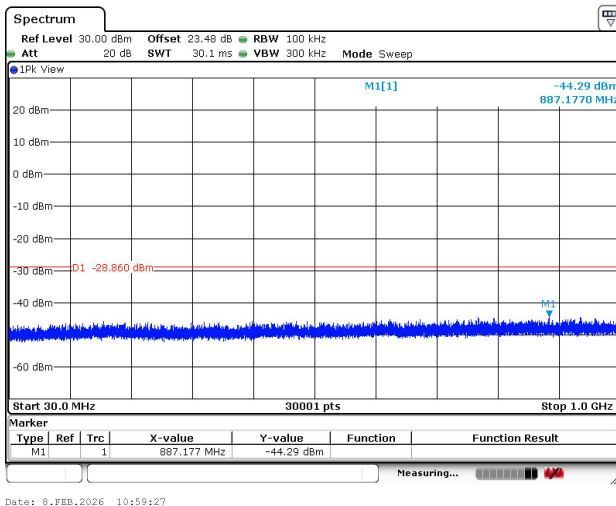

Spurious Emission 1GHz~26.5GHz

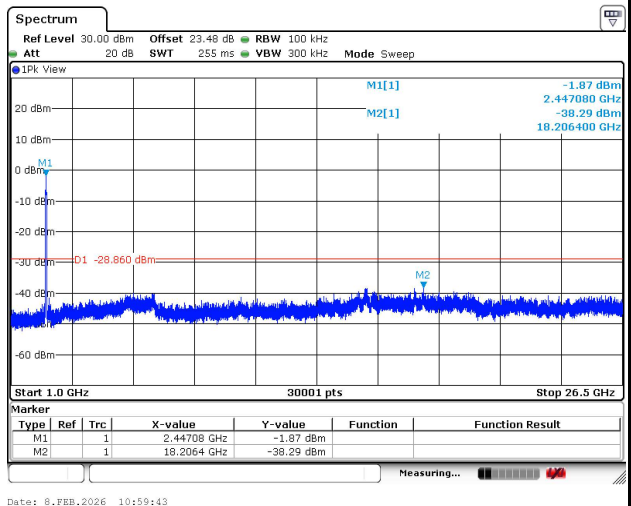




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO : 5N2836
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

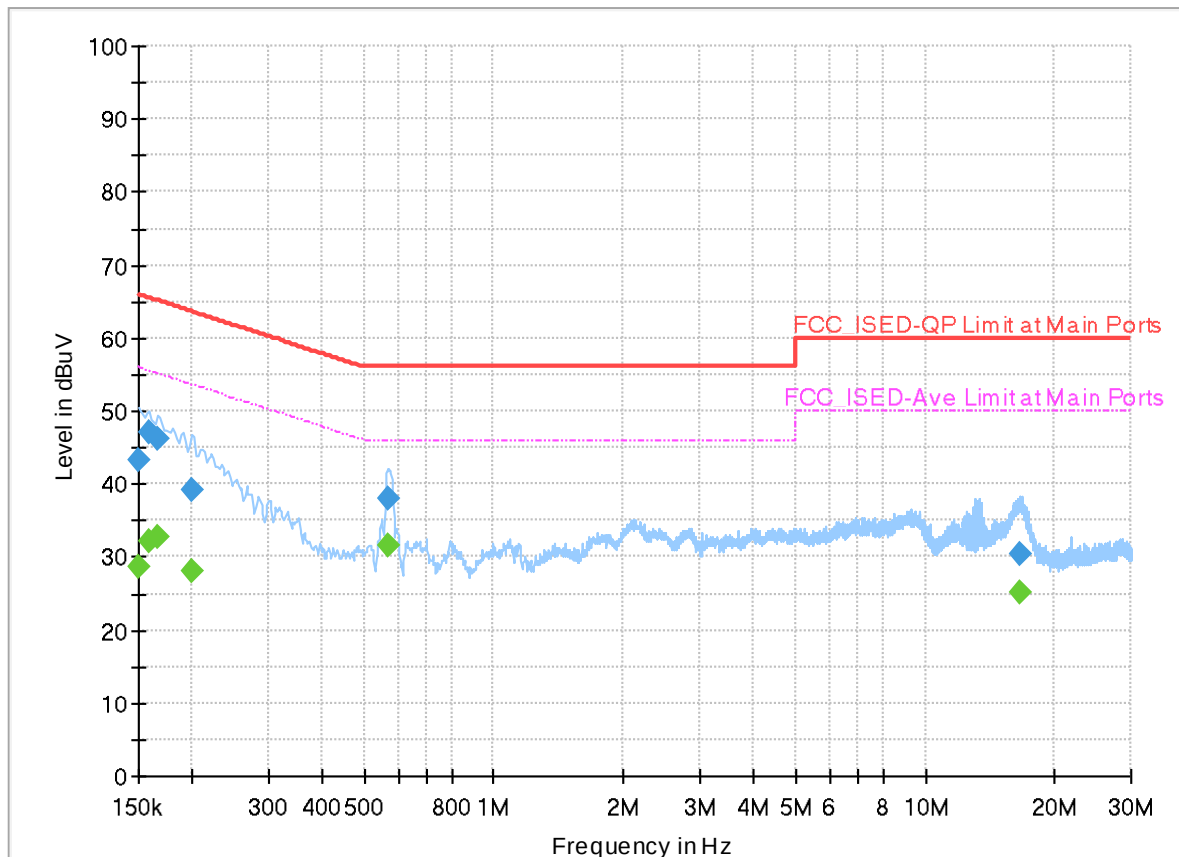

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	28.65	56.00	27.35	L1	ON	20.2
0.150000	43.25	---	66.00	22.75	L1	ON	20.2
0.159000	---	32.14	55.52	23.38	L1	ON	20.1
0.159000	47.08	---	65.52	18.44	L1	ON	20.1
0.165750	---	32.74	55.17	22.43	L1	ON	20.1
0.165750	46.13	---	65.17	19.04	L1	ON	20.1
0.199500	---	28.06	53.63	25.57	L1	ON	20.1
0.199500	39.11	---	63.63	24.52	L1	ON	20.1
0.566250	---	31.71	46.00	14.29	L1	ON	20.0
0.566250	38.15	---	56.00	17.85	L1	ON	20.0
16.563750	---	25.22	50.00	24.78	L1	ON	20.7
16.563750	30.45	---	60.00	29.55	L1	ON	20.7

EUT Information

Report NO : 5N2836
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum



Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	28.03	55.40	27.37	N	ON	20.1
0.161250	41.96	---	65.40	23.44	N	ON	20.1
0.174750	---	29.13	54.73	25.60	N	ON	20.1
0.174750	41.16	---	64.73	23.57	N	ON	20.1
0.188250	---	30.40	54.11	23.71	N	ON	20.1
0.188250	43.69	---	64.11	20.42	N	ON	20.1
0.570750	---	28.18	46.00	17.82	N	ON	20.0
0.570750	35.10	---	56.00	20.90	N	ON	20.0
2.366250	---	24.93	46.00	21.07	N	ON	20.0
2.366250	32.09	---	56.00	23.91	N	ON	20.0
13.161750	---	27.58	50.00	22.42	N	ON	20.6
13.161750	32.80	---	60.00	27.20	N	ON	20.6



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Bill Chang, Fu Chen and, Troye Hsieh	Temperature :	20.1~21.9°C
		Relative Humidity :	50.1~66.9%

Note symbol

-L	Low channel location
-R	High channel location



Sample 1

C1-1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 35	2400-2483.5	6+7	802.11g	12	2467	6Mbps	-	-

**C1-2.Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
35	802.11g	12	2483.53	52.11	54.00	-1.89	H	Avg.	Pass	-	Band Edge
	802.11g	12	7401.00	42.90	74.00	-31.10	H	Peak	Pass	-	Harmonic





Mode	35																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH12_2467MHz																																																																																											
ANT	6+7																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2026-02-05 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2483.53</td><td>63.94</td><td>74.00</td><td>-10.06</td><td>52.40</td><td>27.67</td><td>6.87</td><td>33.12</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>232 36 Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.53	63.94	74.00	-10.06	52.40	27.67	6.87	33.12	10.12									232 36 Peak	Level (dBuV/m) Date: 2026-02-05 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2467.00</td><td>109.00</td><td>-----</td><td>-----</td><td>97.59</td><td>27.56</td><td>6.86</td><td>33.13</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>232 36 Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2467.00	109.00	-----	-----	97.59	27.56	6.86	33.13	10.12									232 36 Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 2483.53	63.94	74.00	-10.06	52.40	27.67	6.87	33.12	10.12																																																																																				
								232 36 Peak																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 2467.00	109.00	-----	-----	97.59	27.56	6.86	33.13	10.12																																																																																				
								232 36 Peak																																																																																				
Avg	Level (dBuV/m) Date: 2026-02-05 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2483.53</td><td>52.11</td><td>54.00</td><td>-1.89</td><td>40.57</td><td>27.67</td><td>6.87</td><td>33.12</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>232 36 Average</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.53	52.11	54.00	-1.89	40.57	27.67	6.87	33.12	10.12									232 36 Average	Level (dBuV/m) Date: 2026-02-05 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2467.00</td><td>101.48</td><td>-----</td><td>-----</td><td>90.11</td><td>27.52</td><td>6.86</td><td>33.13</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>232 36 Average</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2467.00	101.48	-----	-----	90.11	27.52	6.86	33.13	10.12									232 36 Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 2483.53	52.11	54.00	-1.89	40.57	27.67	6.87	33.12	10.12																																																																																				
								232 36 Average																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 2467.00	101.48	-----	-----	90.11	27.52	6.86	33.13	10.12																																																																																				
								232 36 Average																																																																																				



	35																																																																																											
Mode	Band Edge																																																																																											
	2400-2483.5_802.11g_CH12_2467MHz																																																																																											
ANT	6+7																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2026-02-05 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2483.83</td><td>61.50</td><td>74.00</td><td>-12.50</td><td>49.94</td><td>27.68</td><td>6.87</td><td>33.11</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400 82 Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.83	61.50	74.00	-12.50	49.94	27.68	6.87	33.11	10.12									400 82 Peak	Level (dBuV/m) Date: 2026-02-05 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2467.00</td><td>106.25</td><td>-----</td><td>-----</td><td>94.88</td><td>27.52</td><td>6.86</td><td>33.13</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400 82 Peak</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2467.00	106.25	-----	-----	94.88	27.52	6.86	33.13	10.12									400 82 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 2483.83	61.50	74.00	-12.50	49.94	27.68	6.87	33.11	10.12																																																																																				
								400 82 Peak																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 2467.00	106.25	-----	-----	94.88	27.52	6.86	33.13	10.12																																																																																				
								400 82 Peak																																																																																				
Avg	Level (dBuV/m) Date: 2026-02-05 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2483.60</td><td>49.94</td><td>54.00</td><td>-4.06</td><td>38.40</td><td>27.67</td><td>6.87</td><td>33.12</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400 82 Average</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.60	49.94	54.00	-4.06	38.40	27.67	6.87	33.12	10.12									400 82 Average	Level (dBuV/m) Date: 2026-02-05 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2467.00</td><td>98.61</td><td>-----</td><td>-----</td><td>87.24</td><td>27.52</td><td>6.86</td><td>33.13</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400 82 Average</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2467.00	98.61	-----	-----	87.24	27.52	6.86	33.13	10.12									400 82 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 2483.60	49.94	54.00	-4.06	38.40	27.67	6.87	33.12	10.12																																																																																				
								400 82 Average																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 2467.00	98.61	-----	-----	87.24	27.52	6.86	33.13	10.12																																																																																				
								400 82 Average																																																																																				

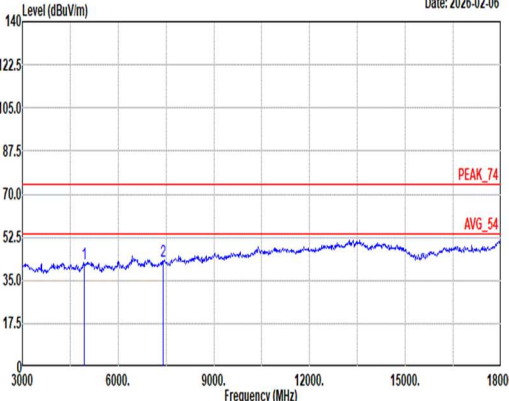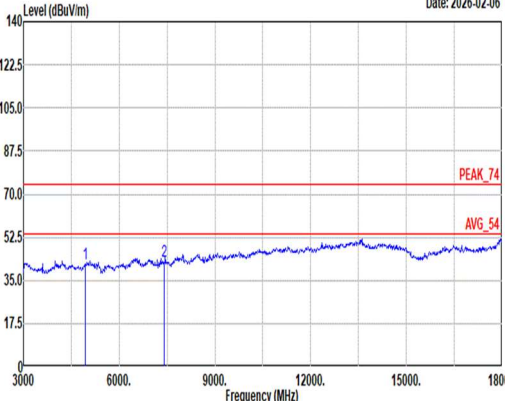

Mode	35																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11g_CH12_2467MHz																																																																																																																							
ANT	6+7																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	 Level (dBuV/m) Date: 2026-02-06 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) PEAK_74 AVG_54						 Level (dBuV/m) Date: 2026-02-06 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) PEAK_74 AVG_54																																																																																																																	
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL						Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4934.00</td><td>41.53</td><td>74.00</td><td>-32.47</td><td>63.90</td><td>32.84</td><td>10.90</td><td>67.07</td><td>0.96</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7401.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>58.77</td><td>36.30</td><td>13.80</td><td>66.16</td><td>0.19</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4934.00	41.53	74.00	-32.47	63.90	32.84	10.90	67.07	0.96	--	Peak	2	7401.00	42.90	74.00	-31.10	58.77	36.30	13.80	66.16	0.19	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4934.00</td><td>41.81</td><td>74.00</td><td>-32.19</td><td>64.18</td><td>32.84</td><td>10.90</td><td>67.07</td><td>0.96</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7401.00</td><td>42.86</td><td>74.00</td><td>-31.14</td><td>58.73</td><td>36.30</td><td>13.80</td><td>66.16</td><td>0.19</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4934.00	41.81	74.00	-32.19	64.18	32.84	10.90	67.07	0.96	--	Peak	2	7401.00	42.86	74.00	-31.14	58.73	36.30	13.80	66.16	0.19	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4934.00	41.53	74.00	-32.47	63.90	32.84	10.90	67.07	0.96	--	Peak																																																																																																													
2	7401.00	42.90	74.00	-31.10	58.77	36.30	13.80	66.16	0.19	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4934.00	41.81	74.00	-32.19	64.18	32.84	10.90	67.07	0.96	--	Peak																																																																																																													
2	7401.00	42.86	74.00	-31.14	58.73	36.30	13.80	66.16	0.19	--	Peak																																																																																																													



Mode	35	
	Harmonic	
	2400-2483.5_802.11g_CH12_2467MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL



Appendix C2.Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Bill Chang, Fu Chen and, Troye Hsieh	Temperature :	20.1~21.9°C
		Relative Humidity :	50.1~66.9%

Note symbol

-L	Low channel location
-R	High channel location



Sample 3

C2-1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 37	2400-2483.5	6+7	802.11g	12	2467	6Mbps	-	-





**C2-2.Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
37	802.11g	12	2483.63	52.05	54.00	-1.95	V	Avg.	Pass	-	Band Edge
	802.11g	12	7401.00	42.67	74.00	-31.33	H	Peak	Pass	-	Harmonic



		37																																								
Mode	Band Edge																																									
	2400-2483.5_802.11g_CH12_2467MHz																																									
ANT	6+7																																									
Pol.																																										
Peak	Horizontal																																									
	Level (dBuV/m) Date: 2026-02-05 PEAK_BE_74 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.53</td><td>61.24</td><td>74.00</td><td>-12.76</td><td>49.70</td><td>27.67</td><td>6.87</td><td>33.12</td><td>10.12</td><td>200</td><td>55 Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 2483.53	61.24	74.00	-12.76	49.70	27.67	6.87	33.12	10.12	200	55 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																
1 2483.53	61.24	74.00	-12.76	49.70	27.67	6.87	33.12	10.12	200	55 Peak																																
Fundamental																																										
Level (dBuV/m) Date: 2026-02-05 PEAK_74 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 2467.00</td><td>104.86</td><td>-----</td><td>-----</td><td>93.45</td><td>27.56</td><td>6.86</td><td>33.13</td><td>10.12</td><td>200</td><td>55 Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 2467.00	104.86	-----	-----	93.45	27.56	6.86	33.13	10.12	200	55 Peak	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																
1 2467.00	104.86	-----	-----	93.45	27.56	6.86	33.13	10.12	200	55 Peak																																
Avg	Horizontal																																									
	Level (dBuV/m) Date: 2026-02-05 AVG_BE_54 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.53</td><td>50.45</td><td>54.00</td><td>-3.55</td><td>38.91</td><td>27.67</td><td>6.87</td><td>33.12</td><td>10.12</td><td>200</td><td>55 Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 2483.53	50.45	54.00	-3.55	38.91	27.67	6.87	33.12	10.12	200	55 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																
1 2483.53	50.45	54.00	-3.55	38.91	27.67	6.87	33.12	10.12	200	55 Average																																
Fundamental																																										
Level (dBuV/m) Date: 2026-02-05 AVG_54 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 2467.00</td><td>97.68</td><td>-----</td><td>-----</td><td>86.34</td><td>27.50</td><td>6.86</td><td>33.14</td><td>10.12</td><td>200</td><td>55 Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 2467.00	97.68	-----	-----	86.34	27.50	6.86	33.14	10.12	200	55 Average	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																
1 2467.00	97.68	-----	-----	86.34	27.50	6.86	33.14	10.12	200	55 Average																																

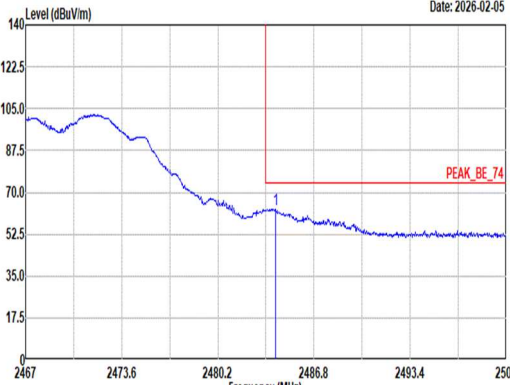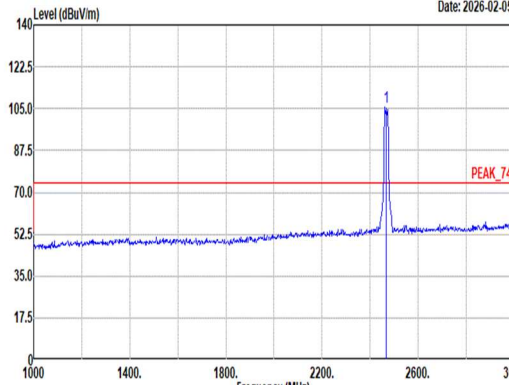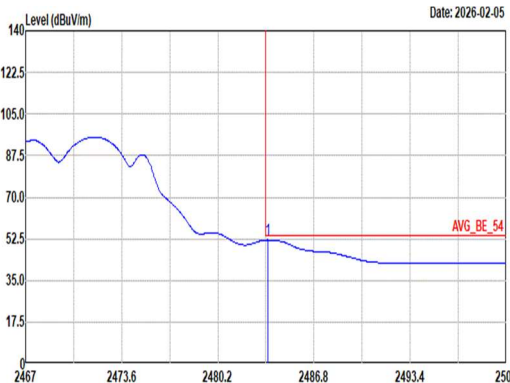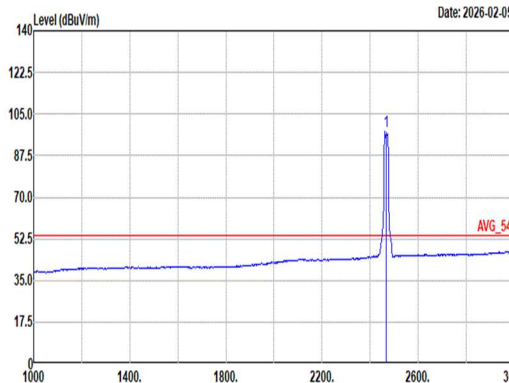

	37																																																																																			
Mode	Band Edge																																																																																			
	2400-2483.5_802.11g_CH12_2467MHz																																																																																			
ANT	6+7																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-02-05  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2467.16</td><td>63.07</td><td>74.00</td><td>-10.93</td><td>51.51</td><td>27.68</td><td>6.87</td><td>33.11</td><td>10.12</td><td>373</td><td>0</td><td>Peak</td></tr></table> Level (dBuV/m) Date: 2026-02-05  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2467.00</td><td>105.55</td><td>-----</td><td>-----</td><td>94.18</td><td>27.52</td><td>6.86</td><td>33.13</td><td>10.12</td><td>373</td><td>0</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2467.16	63.07	74.00	-10.93	51.51	27.68	6.87	33.11	10.12	373	0	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2467.00	105.55	-----	-----	94.18	27.52	6.86	33.13	10.12	373	0	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2467.16	63.07	74.00	-10.93	51.51	27.68	6.87	33.11	10.12	373	0	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2467.00	105.55	-----	-----	94.18	27.52	6.86	33.13	10.12	373	0	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-02-05  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.63</td><td>52.05</td><td>54.00</td><td>-1.95</td><td>40.51</td><td>27.67</td><td>6.87</td><td>33.12</td><td>10.12</td><td>373</td><td>0</td><td>Average</td></tr></table> Level (dBuV/m) Date: 2026-02-05  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2467.00</td><td>97.70</td><td>-----</td><td>-----</td><td>86.33</td><td>27.52</td><td>6.86</td><td>33.13</td><td>10.12</td><td>373</td><td>0</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.63	52.05	54.00	-1.95	40.51	27.67	6.87	33.12	10.12	373	0	Average	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2467.00	97.70	-----	-----	86.33	27.52	6.86	33.13	10.12	373	0	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.63	52.05	54.00	-1.95	40.51	27.67	6.87	33.12	10.12	373	0	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2467.00	97.70	-----	-----	86.33	27.52	6.86	33.13	10.12	373	0	Average																																																																									







FCC RADIO TEST REPORT

Report No. :FR5N2836C

Mode	37																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11g_CH12_2467MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4934.00</td><td>42.45</td><td>74.00</td><td>-31.55</td><td>64.82</td><td>32.84</td><td>10.90</td><td>67.07</td><td>0.96</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7401.00</td><td>42.67</td><td>74.00</td><td>-31.33</td><td>58.54</td><td>36.30</td><td>13.80</td><td>66.16</td><td>0.19</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4934.00	42.45	74.00	-31.55	64.82	32.84	10.90	67.07	0.96	--	Peak	2	7401.00	42.67	74.00	-31.33	58.54	36.30	13.80	66.16	0.19	--	Peak	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4934.00</td><td>42.29</td><td>74.00</td><td>-31.71</td><td>64.66</td><td>32.84</td><td>10.90</td><td>67.07</td><td>0.96</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7401.00</td><td>42.21</td><td>74.00</td><td>-31.79</td><td>58.08</td><td>36.30</td><td>13.80</td><td>66.16</td><td>0.19</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4934.00	42.29	74.00	-31.71	64.66	32.84	10.90	67.07	0.96	--	Peak	2	7401.00	42.21	74.00	-31.79	58.08	36.30	13.80	66.16	0.19	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4934.00	42.45	74.00	-31.55	64.82	32.84	10.90	67.07	0.96	--	Peak																																																																																																					
2	7401.00	42.67	74.00	-31.33	58.54	36.30	13.80	66.16	0.19	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4934.00	42.29	74.00	-31.71	64.66	32.84	10.90	67.07	0.96	--	Peak																																																																																																					
2	7401.00	42.21	74.00	-31.79	58.08	36.30	13.80	66.16	0.19	--	Peak																																																																																																					

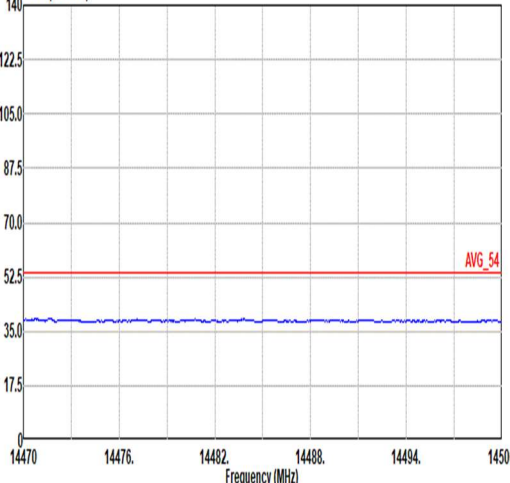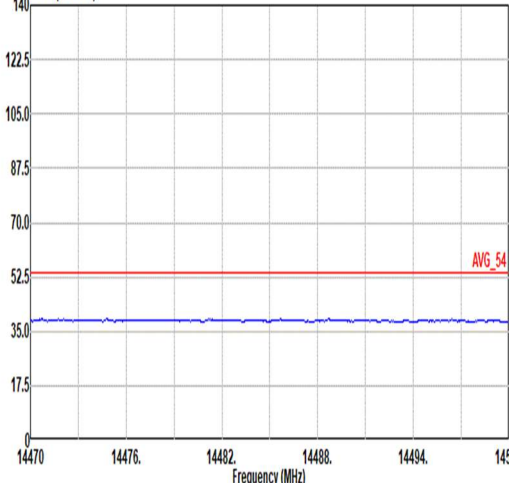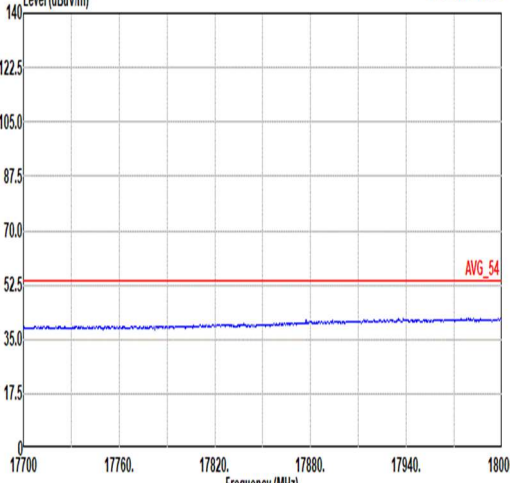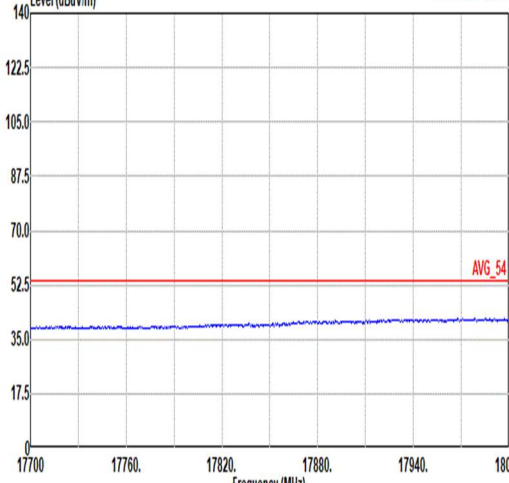

Mode	37	
	Harmonic	
	2400-2483.5_802.11g_CH12_2467MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-06  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-02-06  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-02-06  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-02-06  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL



Appendix C3.Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Bill Chang, Fu Chen and, Troye Hsieh	Temperature :	20.1~21.9°C
		Relative Humidity :	50.1~66.9%

Note symbol

-L	Low channel location
-R	High channel location



Sample 4

C3-1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 36	2400-2483.5	6+7	802.11g	12	2467	6Mbps	-	-

**C3-2.Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
36	802.11g	12	2484.66	51.41	54.00	-2.59	H	Avg.	Pass	-	Band Edge
	802.11g	12	4934.00	43.98	74.00	-30.02	V	Peak	Pass	-	Harmonic





		36																																																																																																																					
Mode	Band Edge																																																																																																																						
	2400-2483.5_802.11g_CH12_2467MHz																																																																																																																						
ANT	6+7																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																
Peak	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2486.27</td><td>64.01</td><td>74.00</td><td>-9.99</td><td>52.40</td><td>27.73</td><td>6.87</td><td>33.11</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>227</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>32 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2486.27	64.01	74.00	-9.99	52.40	27.73	6.87	33.11	10.12									227									32 Peak	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2467.00</td><td>110.00</td><td>-----</td><td>-----</td><td>90.71</td><td>27.52</td><td>6.86</td><td>33.13</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>227</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>32 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2467.00	110.00	-----	-----	90.71	27.52	6.86	33.13	10.12									227									32 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																															
1 2486.27	64.01	74.00	-9.99	52.40	27.73	6.87	33.11	10.12																																																																																																															
								227																																																																																																															
								32 Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																															
1 2467.00	110.00	-----	-----	90.71	27.52	6.86	33.13	10.12																																																																																																															
								227																																																																																																															
								32 Peak																																																																																																															
Avg	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2484.66</td><td>51.41</td><td>54.00</td><td>-2.59</td><td>39.84</td><td>27.69</td><td>6.87</td><td>33.11</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>227</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>32 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.66	51.41	54.00	-2.59	39.84	27.69	6.87	33.11	10.12									227									32 Average	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2467.00</td><td>102.20</td><td>-----</td><td>-----</td><td>90.83</td><td>27.52</td><td>6.86</td><td>33.13</td><td>10.12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>227</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>32 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2467.00	102.20	-----	-----	90.83	27.52	6.86	33.13	10.12									227									32 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																															
1 2484.66	51.41	54.00	-2.59	39.84	27.69	6.87	33.11	10.12																																																																																																															
								227																																																																																																															
								32 Average																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																															
1 2467.00	102.20	-----	-----	90.83	27.52	6.86	33.13	10.12																																																																																																															
								227																																																																																																															
								32 Average																																																																																																															







	36																																																																																																	
Mode	Band Edge																																																																																																	
	2400-2483.5_802.11g_CH12_2467MHz																																																																																																	
ANT	6+7																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.07</td><td>60.65</td><td>74.00</td><td>-13.35</td><td>49.05</td><td>27.72</td><td>6.87</td><td>33.11</td><td>10.12</td><td>200</td><td>102 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.07	60.65	74.00	-13.35	49.05	27.72	6.87	33.11	10.12	200	102 Peak	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2467.00</td><td>107.16</td><td>-----</td><td>-----</td><td>95.77</td><td>27.54</td><td>6.86</td><td>33.13</td><td>10.12</td><td>200</td><td>102 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2467.00	107.16	-----	-----	95.77	27.54	6.86	33.13	10.12	200	102 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2486.07	60.65	74.00	-13.35	49.05	27.72	6.87	33.11	10.12	200	102 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2467.00	107.16	-----	-----	95.77	27.54	6.86	33.13	10.12	200	102 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.53</td><td>48.66</td><td>54.00</td><td>-5.34</td><td>37.12</td><td>27.67</td><td>6.87</td><td>33.12</td><td>10.12</td><td>200</td><td>102 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	48.66	54.00	-5.34	37.12	27.67	6.87	33.12	10.12	200	102 Average	Level (dBuV/m) Date: 2026-02-06 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2467.00</td><td>99.86</td><td>-----</td><td>-----</td><td>88.49</td><td>27.52</td><td>6.86</td><td>33.13</td><td>10.12</td><td>200</td><td>102 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2467.00	99.86	-----	-----	88.49	27.52	6.86	33.13	10.12	200	102 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.53	48.66	54.00	-5.34	37.12	27.67	6.87	33.12	10.12	200	102 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2467.00	99.86	-----	-----	88.49	27.52	6.86	33.13	10.12	200	102 Average																																																																																							

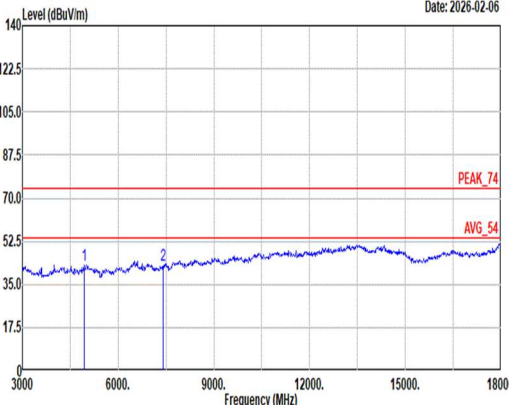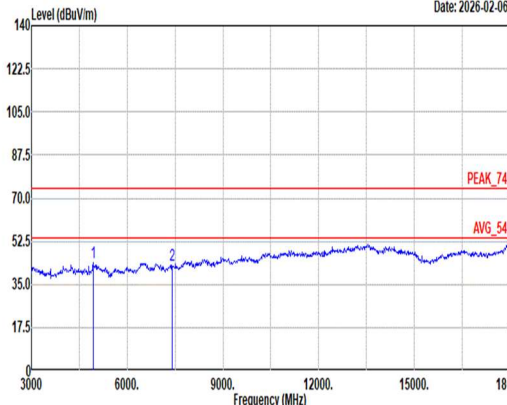

Mode	36																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_802.11g_CH12_2467MHz																																																																																																																								
ANT	6+7																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg	 Level (dBuV/m) Date: 2026-02-06 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) PEAK_74 AVG_54						 Level (dBuV/m) Date: 2026-02-06 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) PEAK_74 AVG_54																																																																																																																		
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL						Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4934.00</td><td>42.77</td><td>74.00</td><td>-31.23</td><td>65.14</td><td>32.84</td><td>10.90</td><td>67.07</td><td>0.96</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7401.00</td><td>42.69</td><td>74.00</td><td>-31.31</td><td>58.56</td><td>36.30</td><td>13.80</td><td>66.16</td><td>0.19</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4934.00	42.77	74.00	-31.23	65.14	32.84	10.90	67.07	0.96	--	Peak	2	7401.00	42.69	74.00	-31.31	58.56	36.30	13.80	66.16	0.19	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4934.00</td><td>43.98</td><td>74.00</td><td>-30.02</td><td>66.35</td><td>32.84</td><td>10.90</td><td>67.07</td><td>0.96</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7401.00</td><td>43.00</td><td>74.00</td><td>-31.00</td><td>58.87</td><td>36.30</td><td>13.80</td><td>66.16</td><td>0.19</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4934.00	43.98	74.00	-30.02	66.35	32.84	10.90	67.07	0.96	--	Peak	2	7401.00	43.00	74.00	-31.00	58.87	36.30	13.80	66.16	0.19	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4934.00	42.77	74.00	-31.23	65.14	32.84	10.90	67.07	0.96	--	Peak																																																																																																														
2	7401.00	42.69	74.00	-31.31	58.56	36.30	13.80	66.16	0.19	--	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4934.00	43.98	74.00	-30.02	66.35	32.84	10.90	67.07	0.96	--	Peak																																																																																																														
2	7401.00	43.00	74.00	-31.00	58.87	36.30	13.80	66.16	0.19	--	Peak																																																																																																														

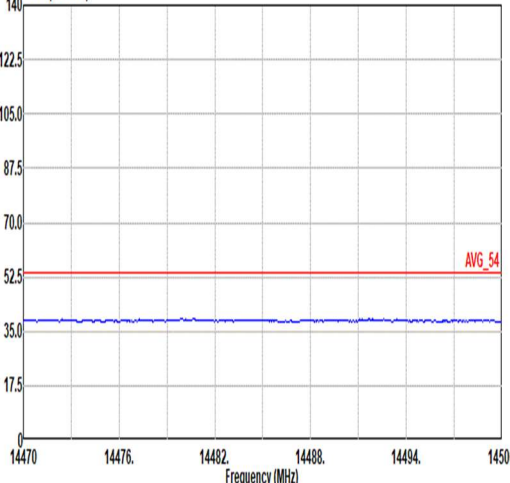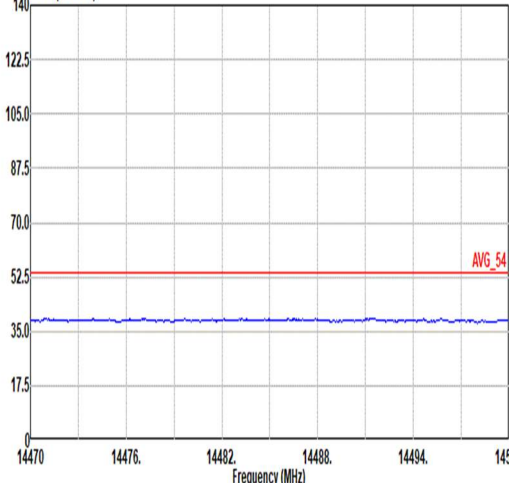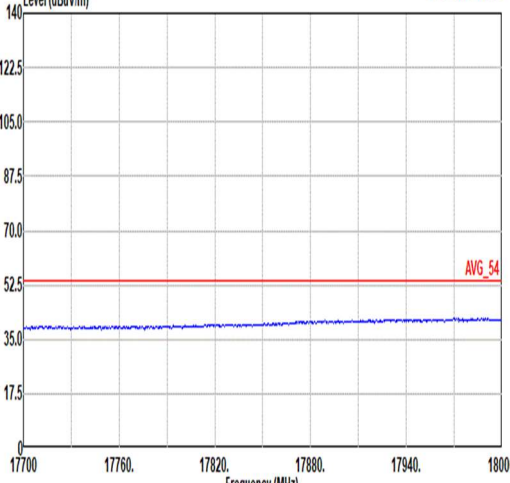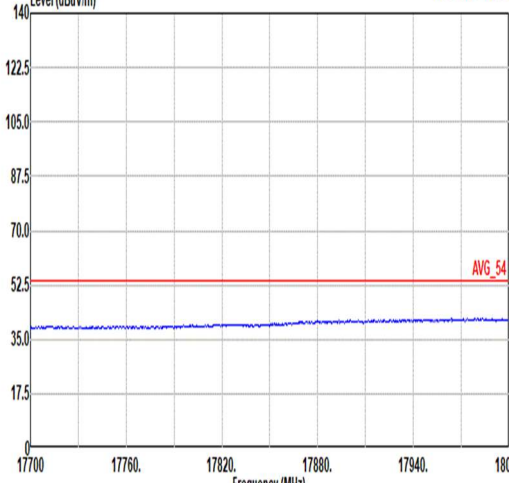

Mode	36	
	Harmonic	
	2400-2483.5_802.11g_CH12_2467MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-06  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-02-06  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL
	Level (dBuV/m) Date: 2026-02-06  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL	Level (dBuV/m) Date: 2026-02-06  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL



Appendix C4.Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Bill Chang, Fu Chen and, Troye Hsieh	Temperature :	20.1~21.9°C
		Relative Humidity :	50.1~66.9%

Note symbol

-L	Low channel location
-R	High channel location



Sample 5

C4-1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 10	2400-2483.5	6+7	802.11b	01	2412	1Mbps	-	-
Mode 11	2400-2483.5	6+7	802.11b	06	2437	1Mbps	-	-
Mode 12	2400-2483.5	6+7	802.11b	11	2462	1Mbps	-	-
Mode 13	2400-2483.5	6+7	802.11g	01	2412	6Mbps	-	-
Mode 14	2400-2483.5	6+7	802.11g	06	2437	6Mbps	-	-
Mode 15	2400-2483.5	6+7	802.11g	11	2462	6Mbps	-	-
Mode 16	2400-2483.5	6+7	802.11ax HE20	01	2412	MCS0	Full RU	-
Mode 17	2400-2483.5	6+7	802.11ax HE20	01	2412	MCS0	Partial_106/53RU	-
Mode 18	2400-2483.5	6+7	802.11ax HE20	06	2437	MCS0	Full RU	-
Mode 19	2400-2483.5	6+7	802.11ax HE20	11	2462	MCS0	Full RU	-
Mode 20	2400-2483.5	6+7	802.11ax HE20	11	2462	MCS0	Partial_106/54RU	-

C4-1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 21	2400-2483.5	6+7	802.11ax HE40	03	2422	MCS0	Full RU	-
Mode 22	2400-2483.5	6+7	802.11ax HE40	03	2422	MCS0	Partial_242/61RU	-
Mode 23	2400-2483.5	6+7	802.11ax HE40	06	2437	MCS0	Full RU	-
Mode 24	2400-2483.5	6+7	802.11ax HE40	09	2457	MCS0	Full RU	-
Mode 25	2400-2483.5	6+7	802.11ax HE40	09	2452	MCS0	Partial_242/62RU	-
Mode 38	2400-2483.5	6+7	802.11b	12	2467	1Mbps	-	-
Mode 39	2400-2483.5	6+7	802.11b	13	2472	1Mbps	-	-
Mode 40	2400-2483.5	6+7	802.11g	12	2467	6Mbps	-	-
Mode 41	2400-2483.5	6+7	802.11g	13	2472	6Mbps	-	-
Mode 42	2400-2483.5	6+7	802.11ax HE20	12	2467	MCS0	Full RU	-
Mode 43	2400-2483.5	6+7	802.11ax HE20	13	2472	MCS0	Full RU	-

**C4-1.Radiated Spurious Emission Test Modes**

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 44	2400-2483.5	6+7	802.11ax HE20	13	2472	MCS0	Partial_106/54RU	-
Mode 49	2400-2483.5	6+7	802.11g	12	2467	6Mbps	-	SHF
Mode 50	2400-2483.5	6+7	802.11g	12	2467	6Mbps	-	LF

C4-2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
10	802.11b	01	2387.22	48.64	54.00	-5.36	V	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	46.88	54.00	-7.12	H	Avg.	Pass	-	Harmonic
11	802.11b	06	2483.56	42.86	54.00	-11.14	V	Avg.	Pass	-	Band Edge
	802.11b	06	4874.00	49.37	54.00	-4.63	H	Avg.	Pass	-	Harmonic
12	802.11b	11	2486.74	49.69	54.00	-4.31	V	Avg.	Pass	-	Band Edge
	802.11b	11	4924.00	50.65	54.00	-3.35	H	Avg.	Pass	-	Harmonic
13	802.11g	01	2389.43	49.44	54.00	-4.56	V	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	37.97	54.00	-16.03	H	Avg.	Pass	-	Harmonic
14	802.11g	06	2483.75	44.85	54.00	-9.15	H	Avg.	Pass	-	Band Edge
	802.11g	06	4874.00	41.56	54.00	-12.44	H	Avg.	Pass	-	Harmonic
15	802.11g	11	2483.51	50.50	54.00	-3.50	V	Avg.	Pass	-	Band Edge

**C4-2.Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
15	802.11g	11	4924.00	38.92	54.00	-15.08	H	Avg.	Pass	-	Harmonic
16	802.11ax HE20	01	2389.95	52.04	54.00	-1.96	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	01	4824.00	37.61	54.00	-16.39	H	Avg.	Pass	Full RU	Harmonic
17	802.11ax HE20	01	2389.95	69.02	74.00	-4.98	V	Peak	Pass	Partial_106/53RU	Band Edge
	802.11ax HE20	01	-	-	-	-	-	-	-	Partial_106/53RU	Harmonic
18	802.11ax HE20	06	2483.56	47.22	54.00	-6.78	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	06	4874.00	40.45	54.00	-13.55	H	Avg.	Pass	Full RU	Harmonic
19	802.11ax HE20	11	2483.62	52.19	54	-1.81	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	11	7386.00	44.55	74.00	-29.45	V	Peak	Pass	Full RU	Harmonic
20	802.11ax HE20	11	2487.88	69.43	74.00	-4.57	V	Peak	Pass	Partial_106/54RU	Band Edge
	802.11ax HE20	11	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic

C4-2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
21	802.11ax HE40	03	2387.50	51.52	54.00	-2.48	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	03	7266.00	43.69	74.00	-30.31	V	Peak	Pass	Full RU	Harmonic
22	802.11ax HE40	03	2389.52	52.38	54.00	-1.62	V	Avg.	Pass	Partial_242/61RU	Band Edge
	802.11ax HE40	03	-	-	-	-	-	-	-	Partial_242/61RU	Harmonic
23	802.11ax HE40	06	2483.56	52.24	54.00	-1.76	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	06	7311.00	44.27	74.00	-29.73	V	Peak	Pass	Full RU	Harmonic
24	802.11ax HE40	09	2486.61	52.48	54.00	-1.52	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	09	7371.00	43.80	74.00	-30.20	H	Peak	Pass	Full RU	Harmonic
25	802.11ax HE40	09	2483.54	52.49	54.00	-1.51	V	Avg.	Pass	Partial_242/62RU	Band Edge
	802.11ax HE40	09	-	-	-	-	-	-	-	Partial_242/62RU	Harmonic
38	802.11b	12	2484.13	52.46	54.00	-1.54	V	Avg.	Pass	-	Band Edge

C4-2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
38	802.11b	12	7401.00	43.10	74.00	-30.90	H	Peak	Pass	-	Harmonic
39	802.11b	13	2485.69	52.15	54.00	-1.85	V	Avg.	Pass	-	Band Edge
	802.11b	13	7416.00	43.25	74.00	-30.75	V	Peak	Pass	-	Harmonic
40	802.11g	12	2483.53	52.66	54.00	-1.34	V	Avg.	Pass	-	Band Edge
	802.11g	12	7401.00	43.11	74.00	-30.89	V	Peak	Pass	-	Harmonic
41	802.11g	13	2483.51	52.65	54.00	-1.35	H	Avg.	Pass	-	Band Edge
	802.11g	13	7416.00	42.99	74.00	-31.01	H	Peak	Pass	-	Harmonic
42	802.11ax HE20	12	2485.15	52.03	54.00	-1.97	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	12	7401.00	43.62	74.00	-30.38	H	Peak	Pass	Full RU	Harmonic
43	802.11ax HE20	13	2483.51	52.57	54.00	-1.43	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	13	7416.00	43.43	74.00	-30.57	H	Peak	Pass	Full RU	Harmonic

C4-2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
44	802.11ax HE20	13	2483.51	72.27	74.00	-1.73	V	Peak	Pass	Partial_106/54RU	Band Edge
	802.11ax HE20	13	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic
49	SHF	12	24458.16	40.15	74.00	-33.85	V	Peak	Pass	-	SHF
50	LF	12	43.58	33.72	40.00	-6.28	V	QP	Pass	-	LF



Mode	10																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																	
ANT	6+7																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2385.27</td><td>55.81</td><td>74.00</td><td>-18.19</td><td>44.85</td><td>27.25</td><td>6.80</td><td>33.21</td><td>10.12</td><td>100 59 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2385.27	55.81	74.00	-18.19	44.85	27.25	6.80	33.21	10.12	100 59 Peak	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2412.00</td><td>108.09</td><td>-----</td><td>-----</td><td>96.92</td><td>27.40</td><td>6.83</td><td>33.18</td><td>10.12</td><td>100 59 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2412.00	108.09	-----	-----	96.92	27.40	6.83	33.18	10.12	100 59 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2385.27	55.81	74.00	-18.19	44.85	27.25	6.80	33.21	10.12	100 59 Peak																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2412.00	108.09	-----	-----	96.92	27.40	6.83	33.18	10.12	100 59 Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2386.83</td><td>47.30</td><td>54.00</td><td>-6.70</td><td>36.31</td><td>27.27</td><td>6.80</td><td>33.20</td><td>10.12</td><td>100 59 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2386.83	47.30	54.00	-6.70	36.31	27.27	6.80	33.20	10.12	100 59 Average	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2412.00</td><td>104.88</td><td>-----</td><td>-----</td><td>93.71</td><td>27.40</td><td>6.83</td><td>33.18</td><td>10.12</td><td>100 59 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2412.00	104.88	-----	-----	93.71	27.40	6.83	33.18	10.12	100 59 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2386.83	47.30	54.00	-6.70	36.31	27.27	6.80	33.20	10.12	100 59 Average																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2412.00	104.88	-----	-----	93.71	27.40	6.83	33.18	10.12	100 59 Average																																																																									



FCC RADIO TEST REPORT

Report No. :FR5N2836C

Mode	10																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
ANT	6+7																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2387.48</td><td>56.32</td><td>74.00</td><td>-17.68</td><td>45.33</td><td>27.27</td><td>6.80</td><td>33.20</td><td>10.12</td><td>300 351 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2387.48	56.32	74.00	-17.68	45.33	27.27	6.80	33.20	10.12	300 351 Peak	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2412.00</td><td>111.44</td><td>-----</td><td>-----</td><td>100.27</td><td>27.40</td><td>6.83</td><td>33.18</td><td>10.12</td><td>300 351 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2412.00	111.44	-----	-----	100.27	27.40	6.83	33.18	10.12	300 351 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2387.48	56.32	74.00	-17.68	45.33	27.27	6.80	33.20	10.12	300 351 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2412.00	111.44	-----	-----	100.27	27.40	6.83	33.18	10.12	300 351 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2387.22</td><td>48.64</td><td>54.00</td><td>-5.36</td><td>37.65</td><td>27.27</td><td>6.80</td><td>33.20</td><td>10.12</td><td>300 351 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2387.22	48.64	54.00	-5.36	37.65	27.27	6.80	33.20	10.12	300 351 Average	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2412.00</td><td>188.30</td><td>-----</td><td>-----</td><td>97.13</td><td>27.40</td><td>6.83</td><td>33.18</td><td>10.12</td><td>300 351 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2412.00	188.30	-----	-----	97.13	27.40	6.83	33.18	10.12	300 351 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2387.22	48.64	54.00	-5.36	37.65	27.27	6.80	33.20	10.12	300 351 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2412.00	188.30	-----	-----	97.13	27.40	6.83	33.18	10.12	300 351 Average																																																																																	



Mode	10																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-02-04 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>49.75</td><td>74.00</td><td>-24.25</td><td>73.13</td><td>32.40</td><td>10.42</td><td>67.15</td><td>0.95</td><td>150</td><td>58 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>46.88</td><td>54.00</td><td>-7.12</td><td>70.26</td><td>32.40</td><td>10.42</td><td>67.15</td><td>0.95</td><td>150</td><td>58 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	49.75	74.00	-24.25	73.13	32.40	10.42	67.15	0.95	150	58 Peak	2	4824.00	46.88	54.00	-7.12	70.26	32.40	10.42	67.15	0.95	150	58 Average	Level (dBuV/m) Date: 2026-02-04 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>70.34</td><td>32.40</td><td>10.42</td><td>67.15</td><td>0.95</td><td>100</td><td>75 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>44.93</td><td>54.00</td><td>-9.07</td><td>68.31</td><td>32.40</td><td>10.42</td><td>67.15</td><td>0.95</td><td>100</td><td>75 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.96	74.00	-27.04	70.34	32.40	10.42	67.15	0.95	100	75 Peak	2	4824.00	44.93	54.00	-9.07	68.31	32.40	10.42	67.15	0.95	100	75 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4824.00	49.75	74.00	-24.25	73.13	32.40	10.42	67.15	0.95	150	58 Peak																																																																																																					
2	4824.00	46.88	54.00	-7.12	70.26	32.40	10.42	67.15	0.95	150	58 Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4824.00	46.96	74.00	-27.04	70.34	32.40	10.42	67.15	0.95	100	75 Peak																																																																																																					
2	4824.00	44.93	54.00	-9.07	68.31	32.40	10.42	67.15	0.95	100	75 Average																																																																																																					