

PHY: 2MHz

Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4804.00	56.58	-9.60	46.98	74.00	27.02	Vertical
4804.00	55.60	-9.60	46.00	74.00	28.00	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4804.00	48.52	-9.60	38.92	54.00	15.08	Vertical
4804.00	48.07	-9.60	38.47	54.00	15.53	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4884.00	56.46	-9.04	47.42	74.00	26.58	Vertical
4884.00	55.15	-9.04	46.11	74.00	27.89	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4884.00	48.58	-9.04	39.54	54.00	14.46	Vertical
4884.00	48.54	-9.04	39.50	54.00	14.50	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4960.00	56.03	-8.45	47.58	74.00	26.42	Vertical
4960.00	55.63	-8.45	47.18	74.00	26.82	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4960.00	48.60	-8.45	40.15	54.00	13.85	Vertical
4960.00	48.94	-8.45	40.49	54.00	13.51	Horizontal
Remark: 1. Final Level =Receiver Read level + Factor. 2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.						

Coded PHY, S=2

Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4804.00	56.52	-9.60	46.92	74.00	27.08	Vertical
4804.00	55.88	-9.60	46.28	74.00	27.72	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4804.00	49.04	-9.60	39.44	54.00	14.56	Vertical
4804.00	49.05	-9.60	39.45	54.00	14.55	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4804.00	49.04	-9.60	39.44	54.00	14.56	Vertical
4804.00	49.05	-9.60	39.45	54.00	14.55	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4884.00	49.47	-9.04	40.43	54.00	13.57	Vertical
4884.00	48.88	-9.04	39.84	54.00	14.16	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4960.00	56.68	-8.45	48.23	74.00	25.77	Vertical
4960.00	55.62	-8.45	47.17	74.00	26.83	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4960.00	49.47	-8.45	41.02	54.00	12.98	Vertical
4960.00	48.76	-8.45	40.31	54.00	13.69	Horizontal
Remark: 1. Final Level =Receiver Read level + Factor. 2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.						

Coded PHY, S=8

Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4804.00	57.54	-9.60	47.94	74.00	26.06	Vertical
4804.00	56.26	-9.60	46.66	74.00	27.34	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4804.00	49.10	-9.60	39.50	54.00	14.50	Vertical
4804.00	48.89	-9.60	39.29	54.00	14.71	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4884.00	49.12	-9.04	40.08	74.00	33.92	Vertical
4884.00	56.22	-9.04	47.18	74.00	26.82	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4884.00	48.83	-9.04	39.79	54.00	14.21	Vertical
4884.00	49.03	-9.04	39.99	54.00	14.01	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4960.00	57.15	-8.45	48.70	74.00	25.30	Vertical
4960.00	56.03	-8.45	47.58	74.00	26.42	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4960.00	49.51	-8.45	41.06	54.00	12.94	Vertical
4960.00	48.66	-8.45	40.21	54.00	13.79	Horizontal
Remark: 1. Final Level =Receiver Read level + Factor. 2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.						


Test Data

Appendix A – BLE-1M PHY


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	8.809	0	8.809	30	Pass
NVNT	BLE	2442	Ant 1	8.247	0	8.247	30	Pass
NVNT	BLE	2480	Ant 1	9.04	0	9.04	30	Pass


Power NVNT BLE 2402MHz Ant1

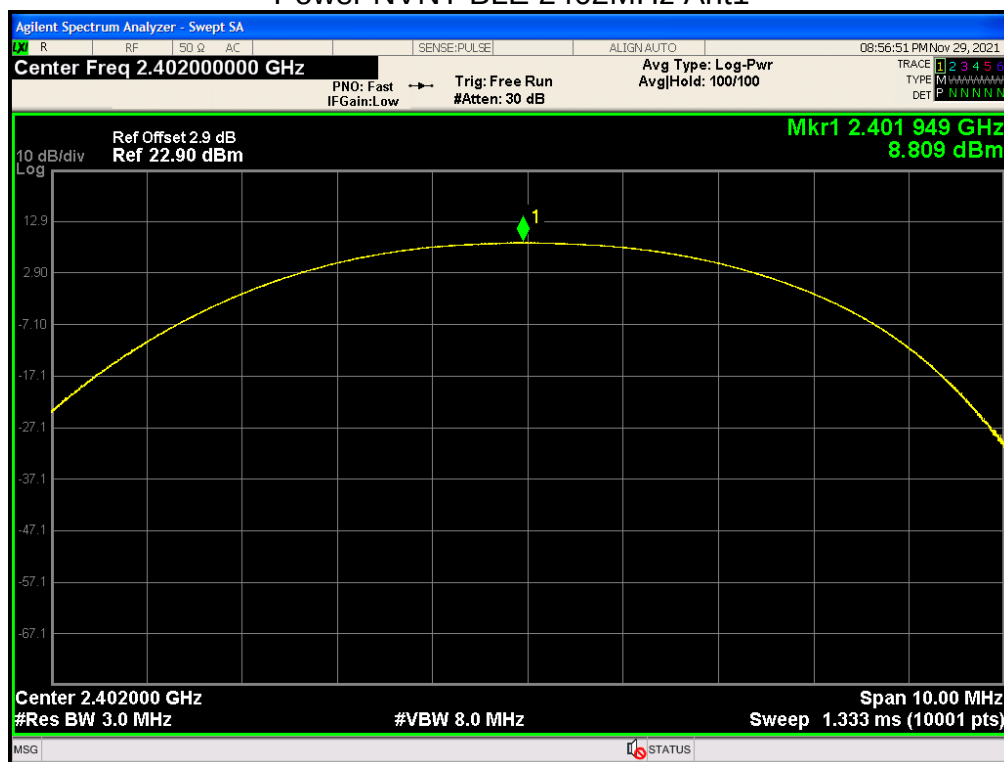

Power NVNT BLE 2442MHz Ant1

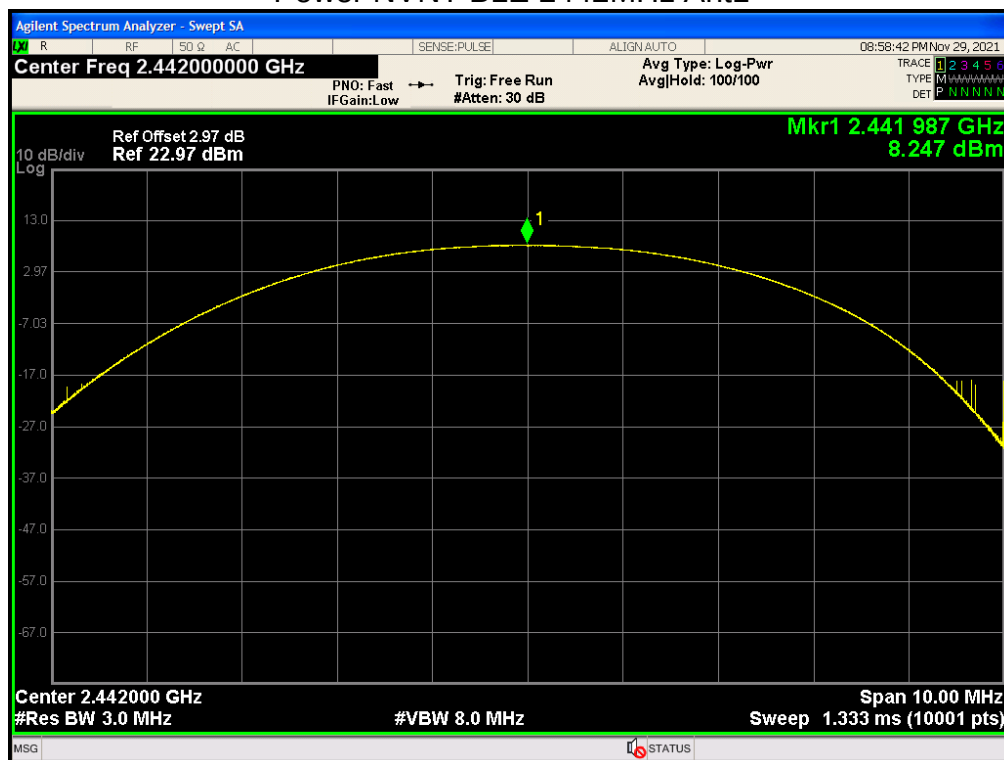


Power NVNT BLE 2480MHz Ant1

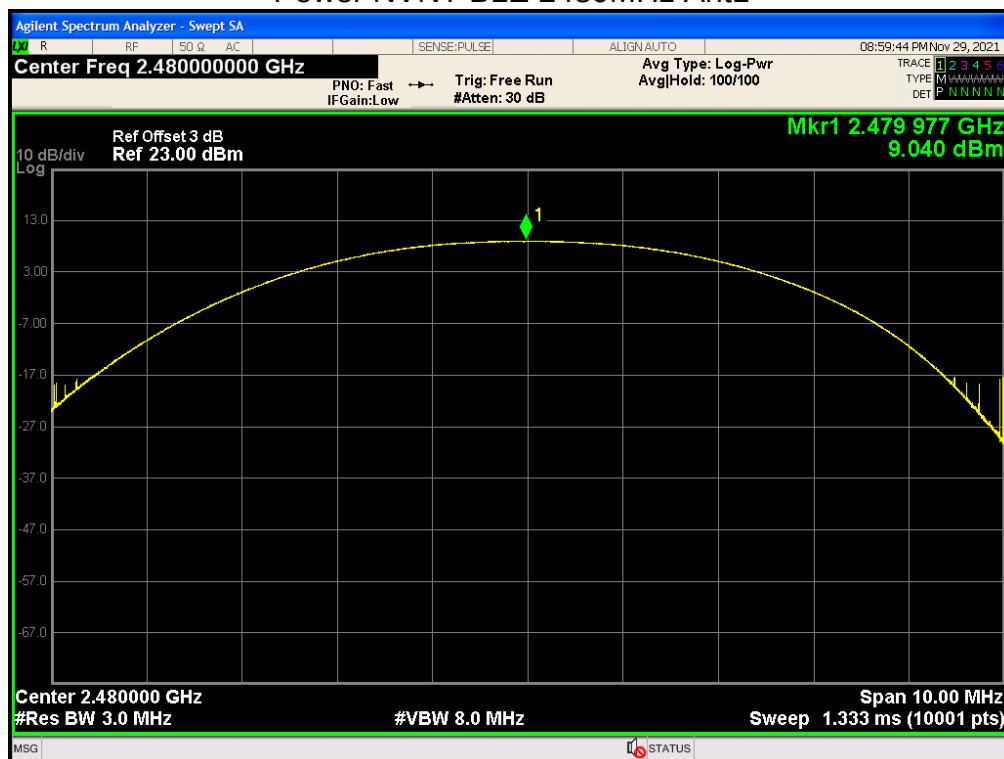


-6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	0.6939	0.5	Pass
NVNT	BLE	2442	Ant 1	0.6715	0.5	Pass
NVNT	BLE	2480	Ant 1	0.6309	0.5	Pass


OBW NVNT BLE 2402MHz Ant1

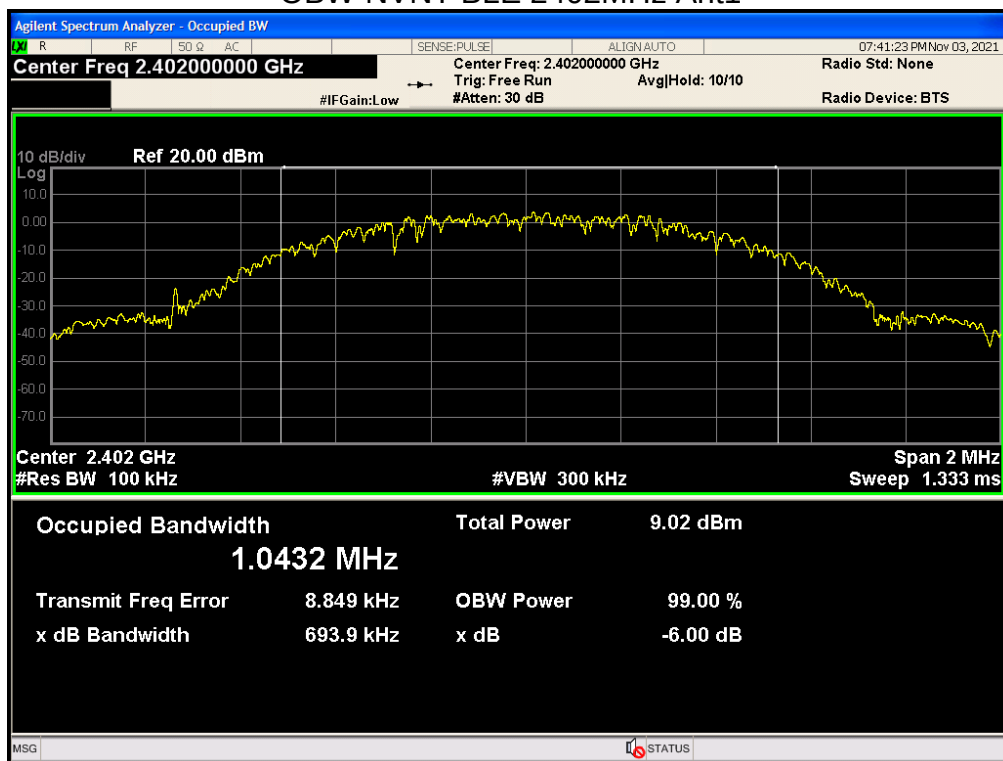

OBW NVNT BLE 2442MHz Ant1

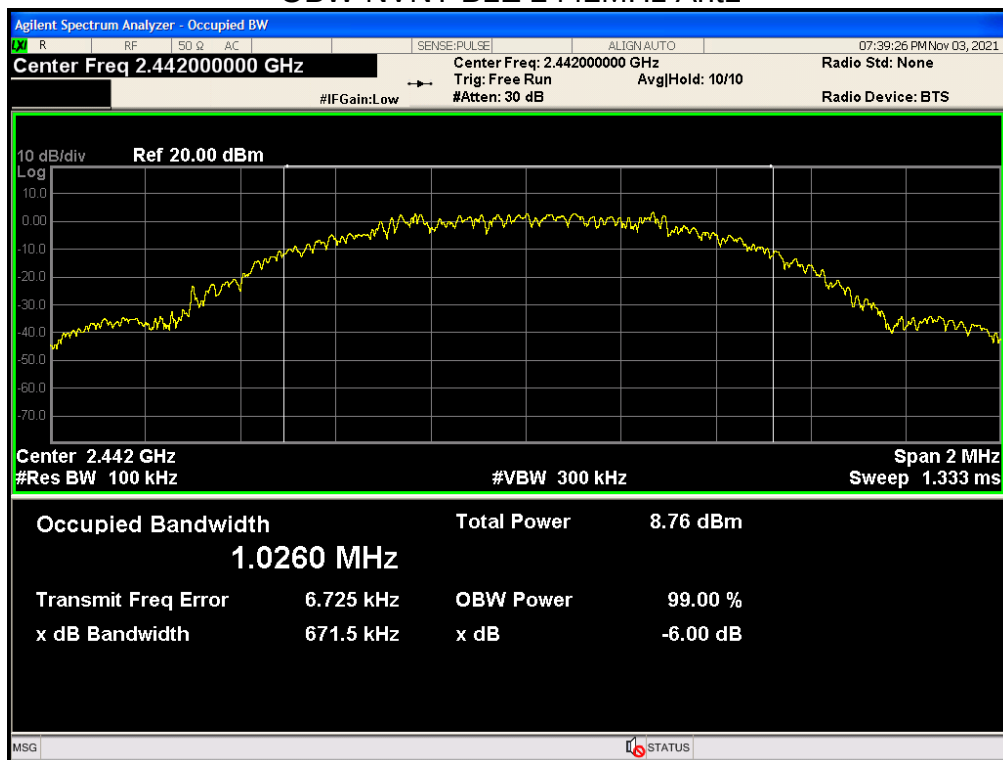


OBW NVNT BLE 2480MHz Ant1

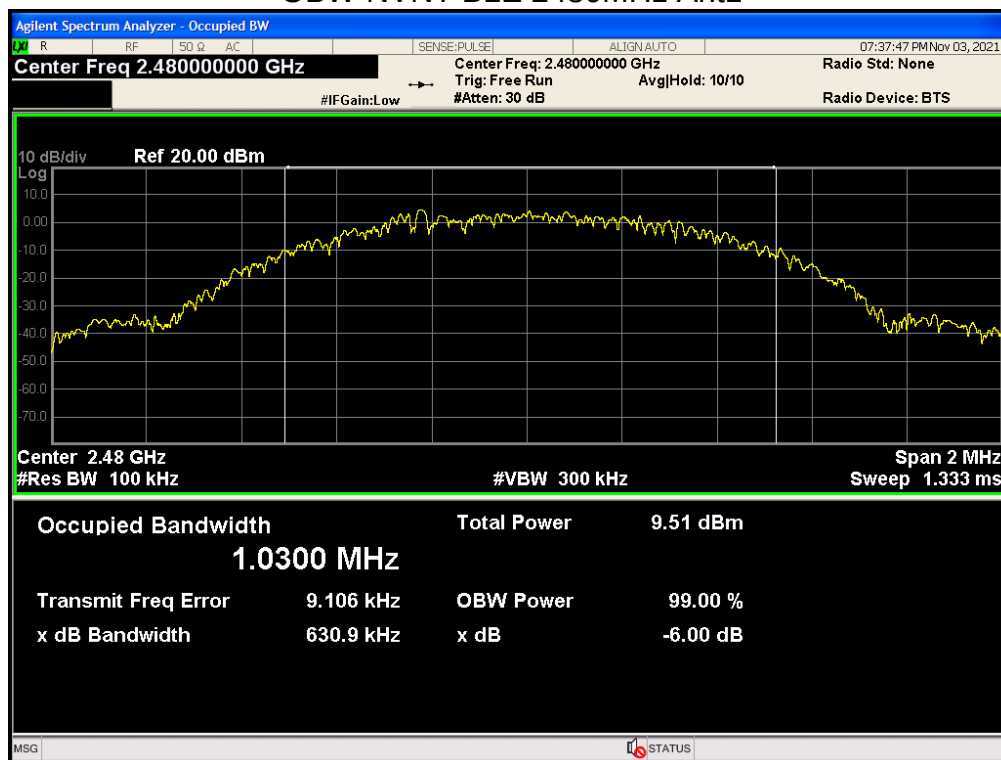


99% Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant 1	1.0252
NVNT	BLE	2442	Ant 1	1.0455
NVNT	BLE	2480	Ant 1	1.0297


OBW NVNT BLE 2402MHz Ant1

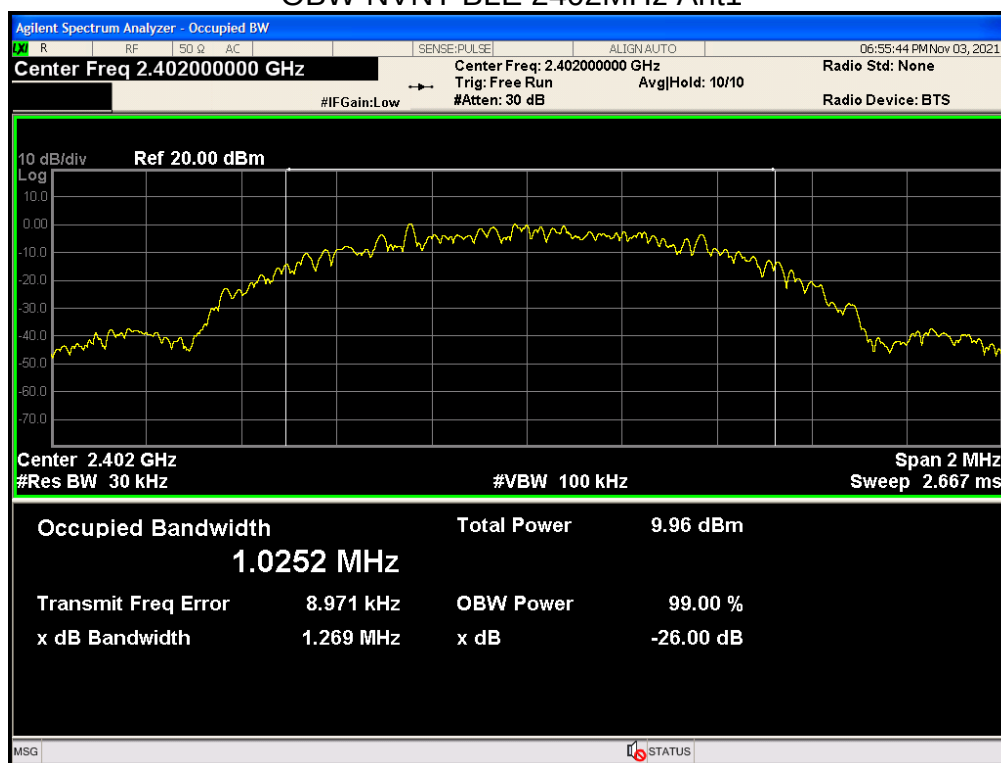

OBW NVNT BLE 2442MHz Ant1

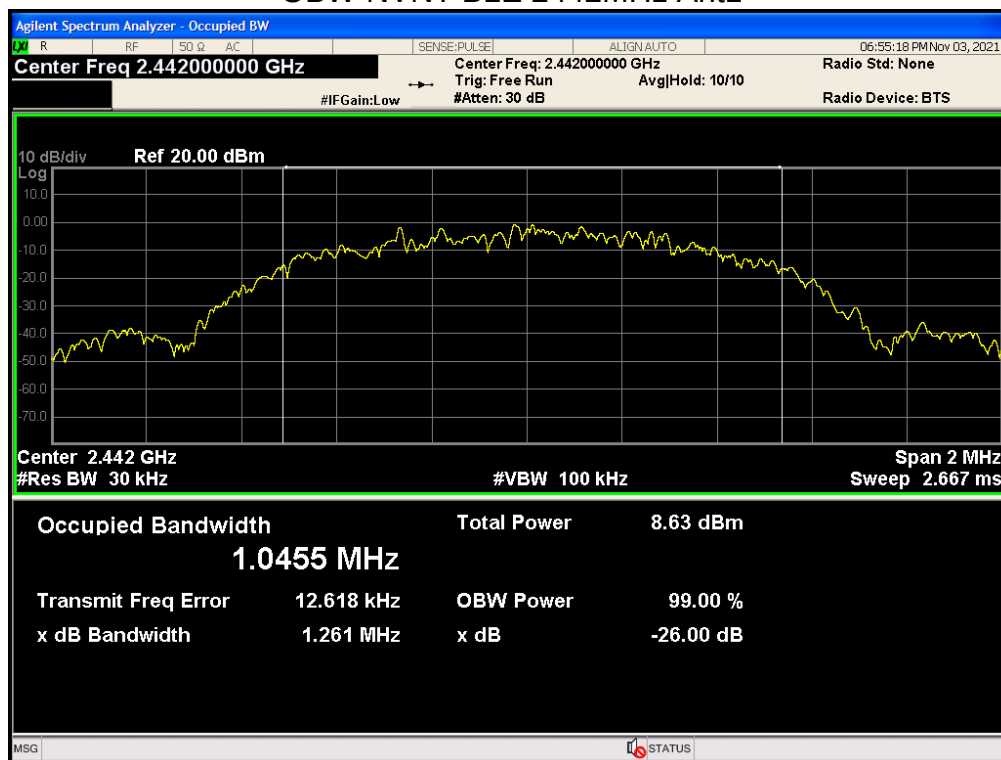


OBW NVNT BLE 2480MHz Ant1

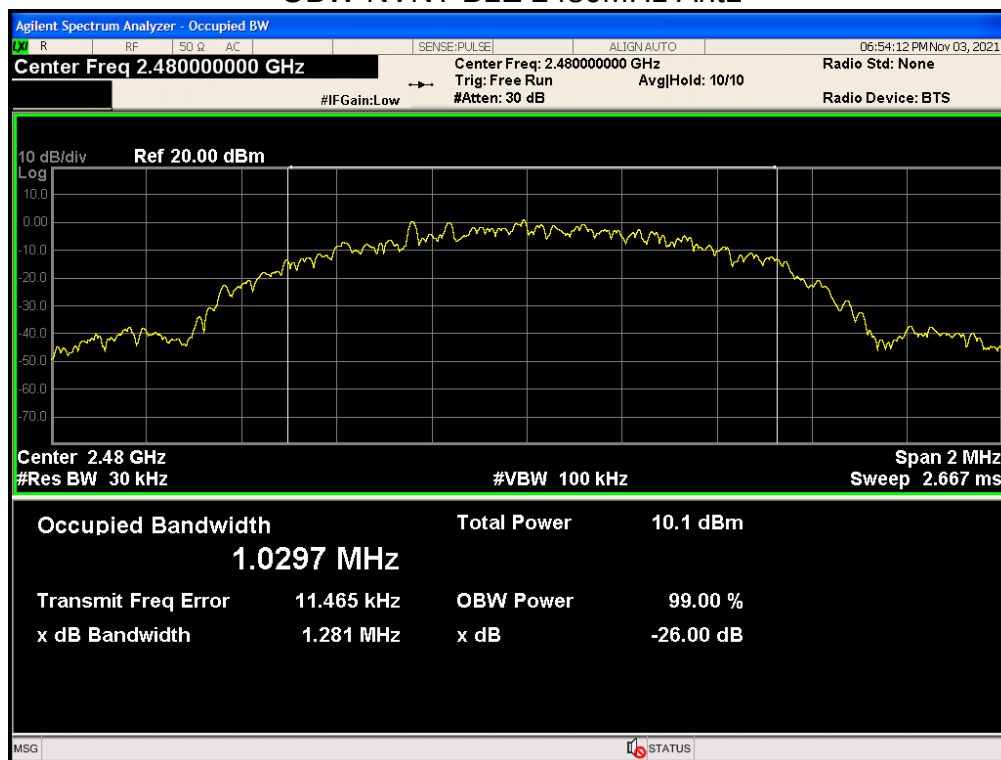


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	-7.733	8	Pass
NVNT	BLE	2402	Total	-7.733	8	Pass
NVNT	BLE	2442	Ant 1	-8.369	8	Pass
NVNT	BLE	2442	Total	-8.369	8	Pass
NVNT	BLE	2480	Ant 1	-7.614	8	Pass
NVNT	BLE	2480	Total	-7.614	8	Pass


PSD NVNT BLE 2402MHz Ant1

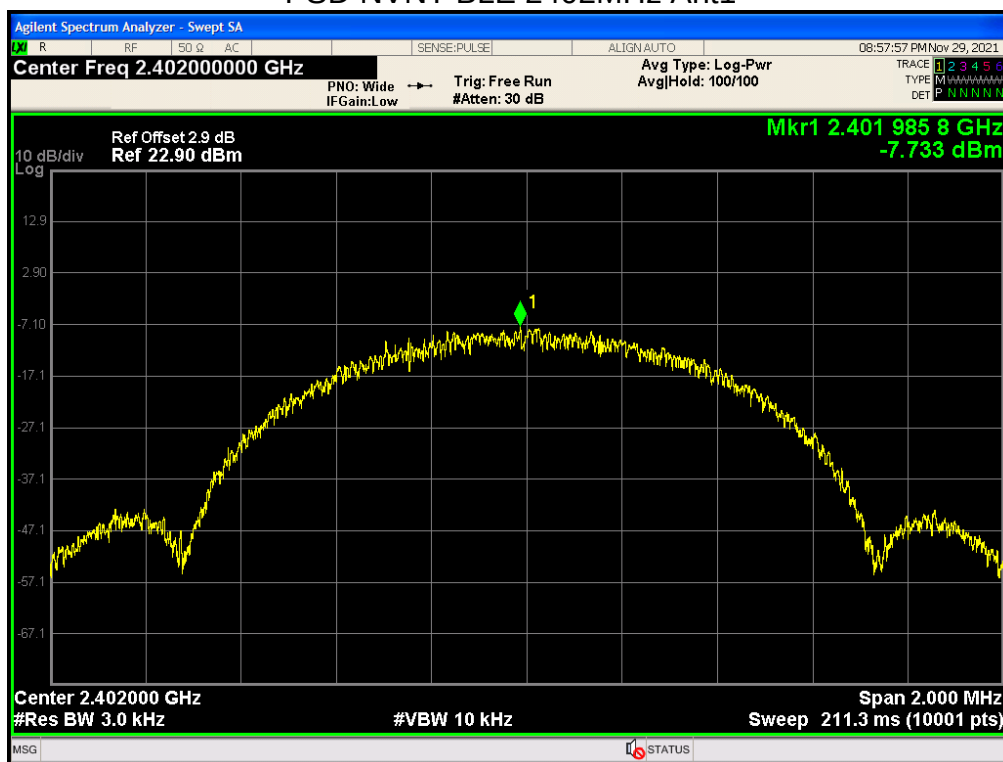

PSD NVNT BLE 2442MHz Ant1

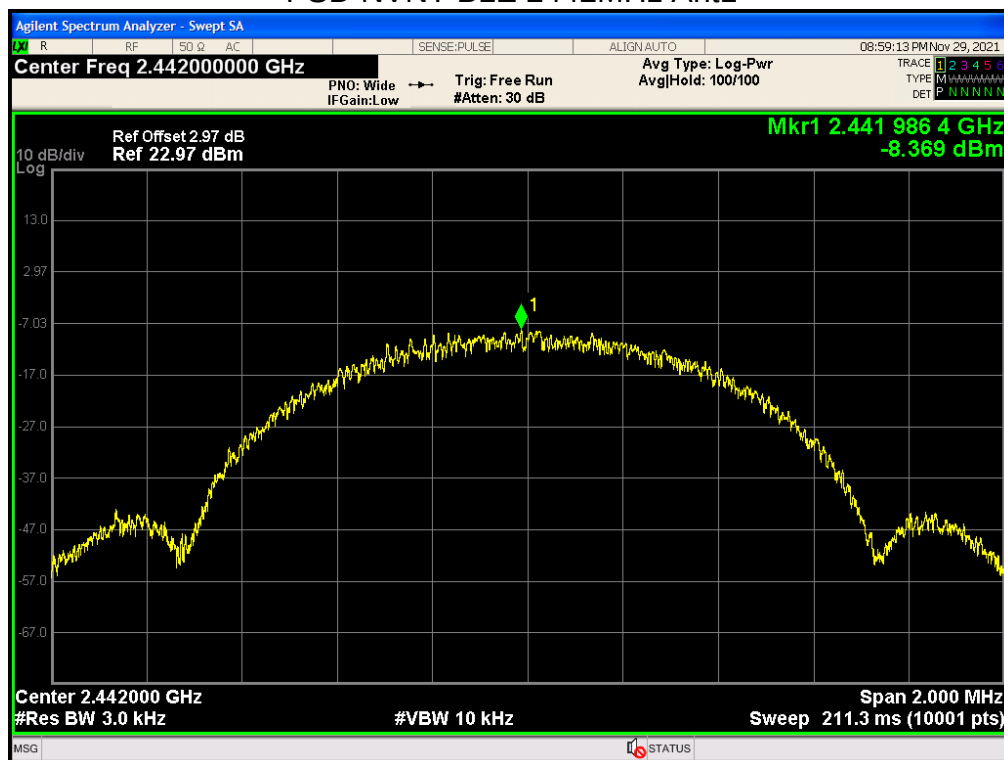


PSD NVNT BLE 2480MHz Ant1

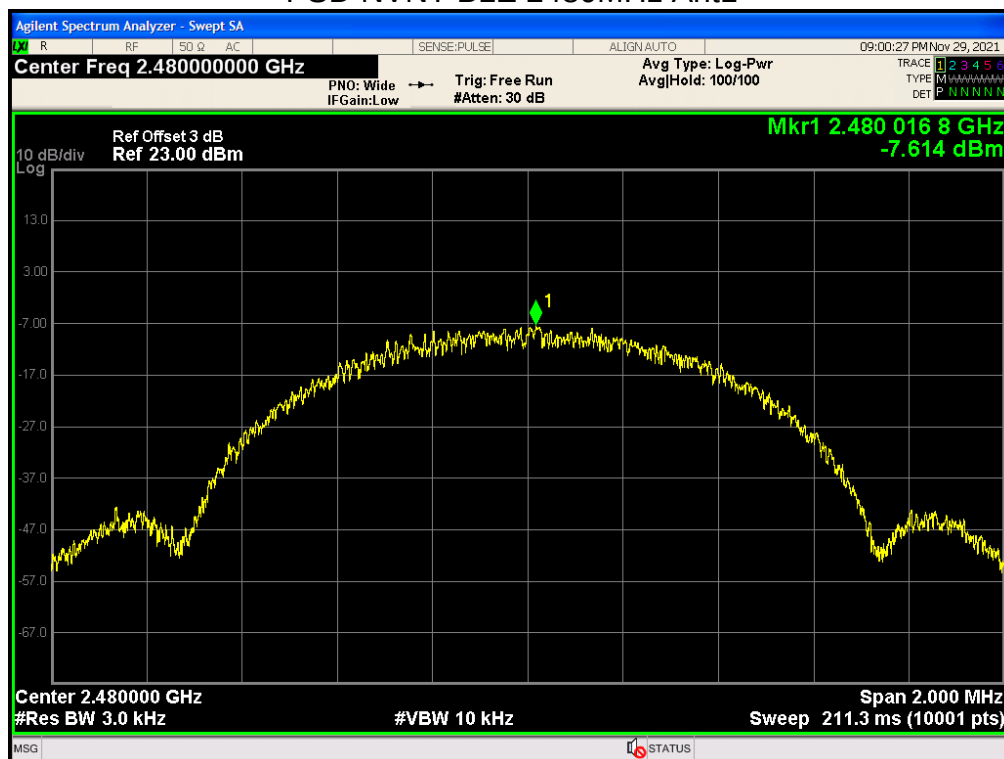


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-60.556	-20	Pass
NVNT	BLE	2480	Ant 1	-53.729	-20	Pass


Band Edge NVNT BLE 2402MHz Ant1 Ref

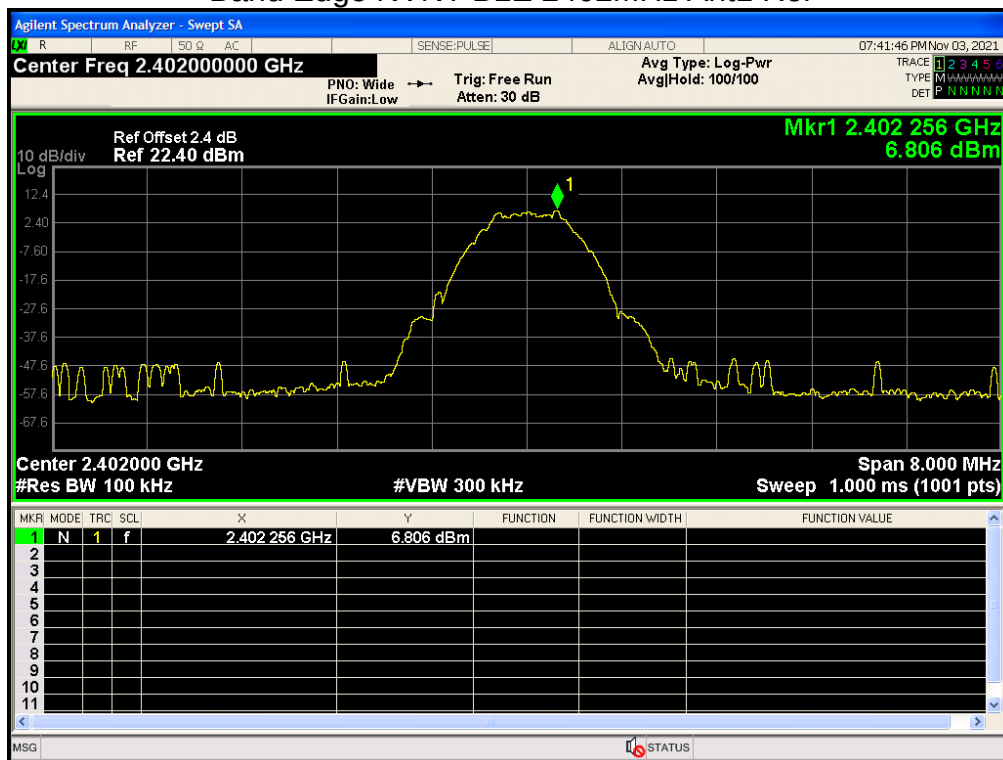


Band Edge NVNT BLE 2402MHz Ant1 Emission

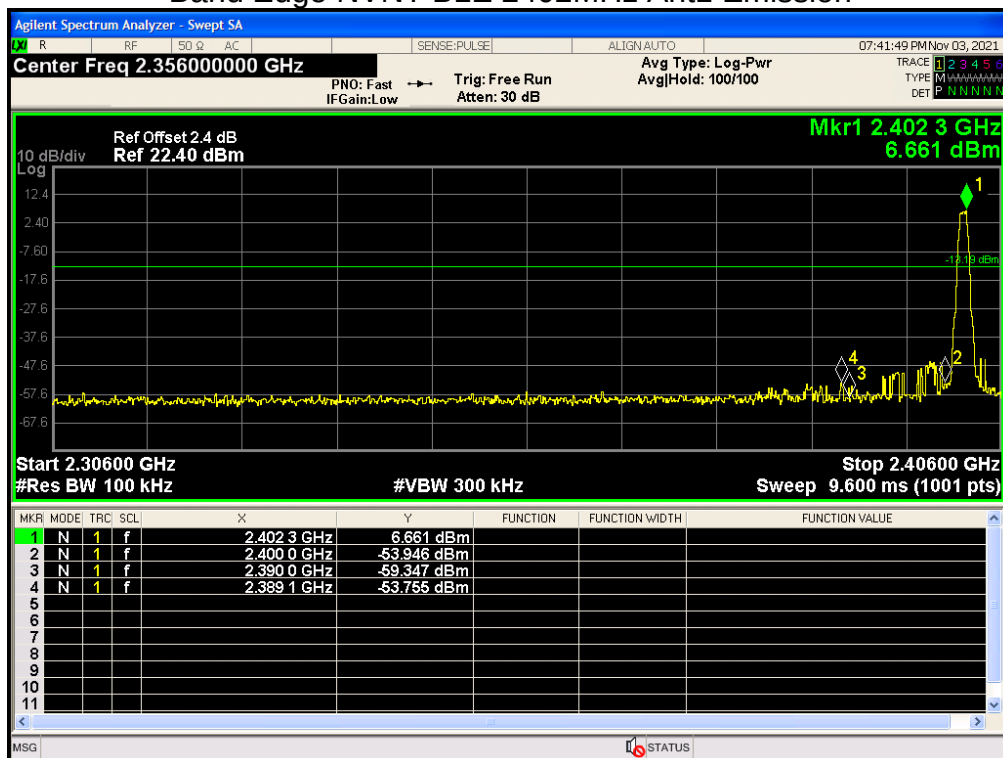

Band Edge NVNT BLE 2480MHz Ant1 Ref

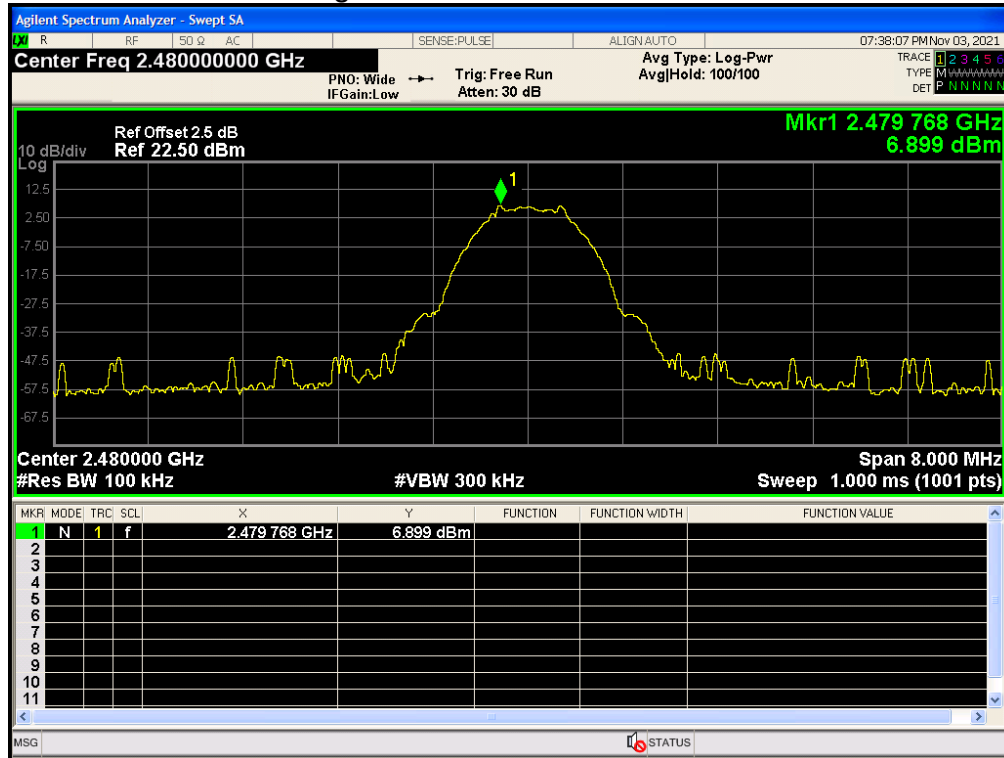


Band Edge NVNT BLE 2480MHz Ant1 Emission

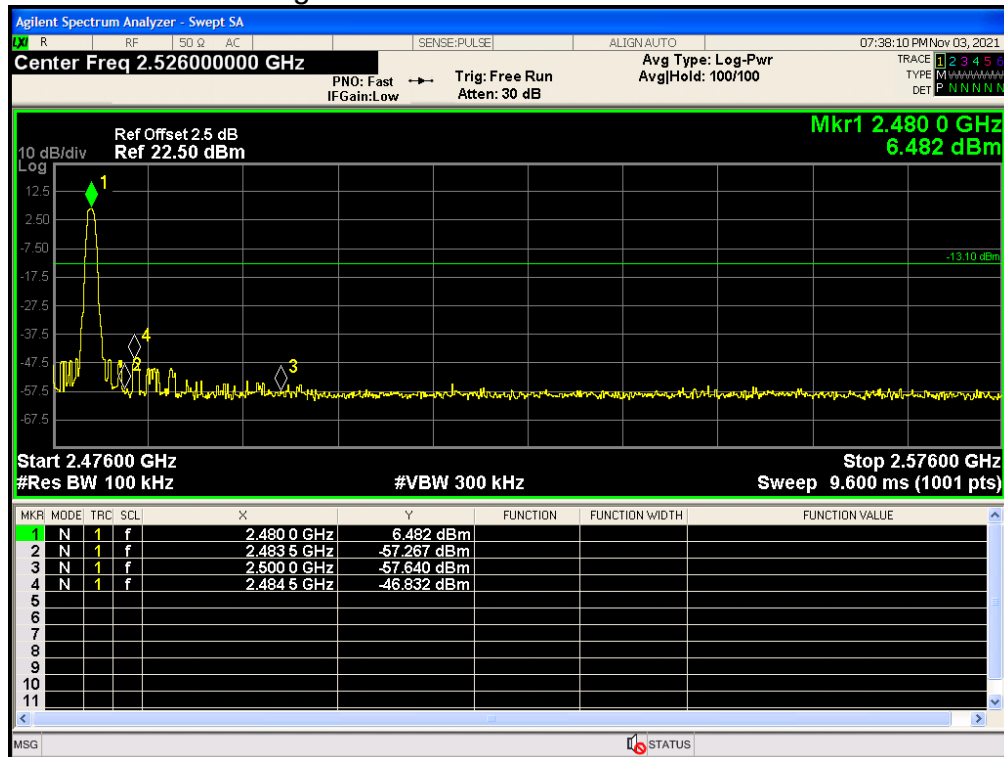


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-51.103	-20	Pass
NVNT	BLE	2442	Ant 1	-49.388	-20	Pass
NVNT	BLE	2480	Ant 1	-51.567	-20	Pass


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

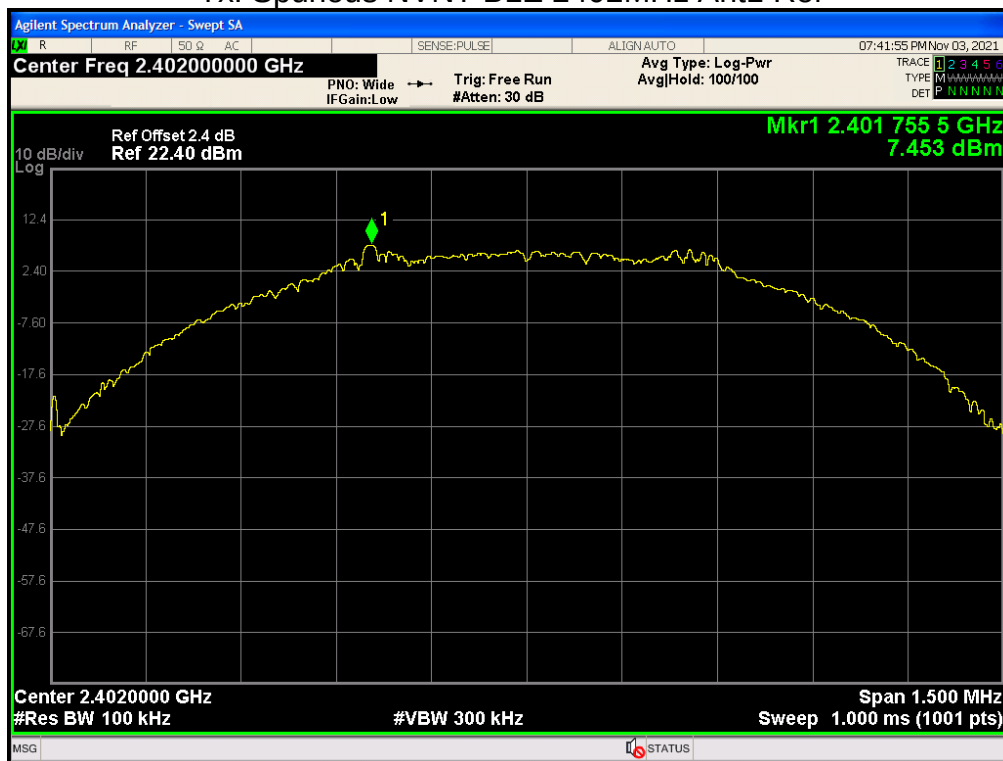


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

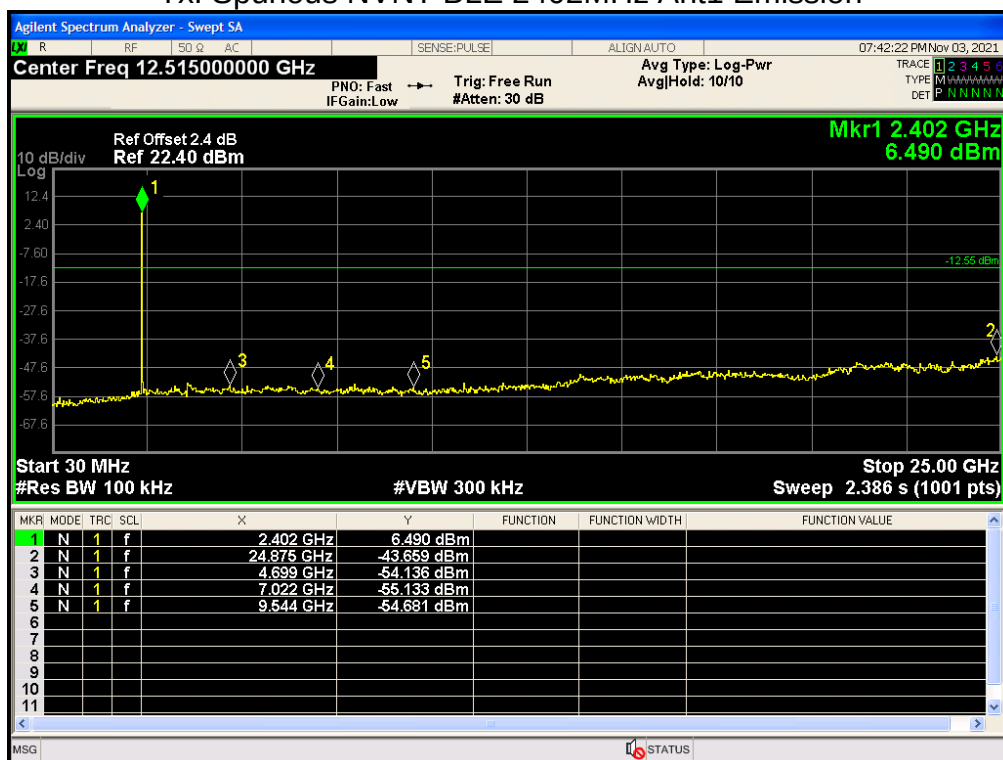


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

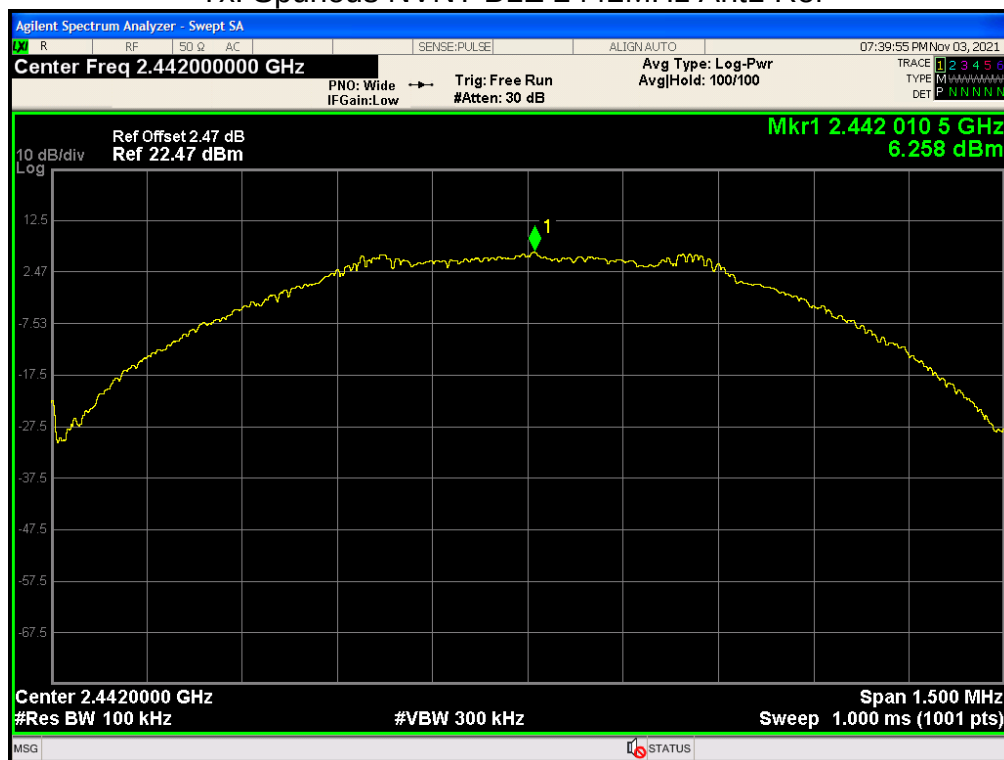


Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

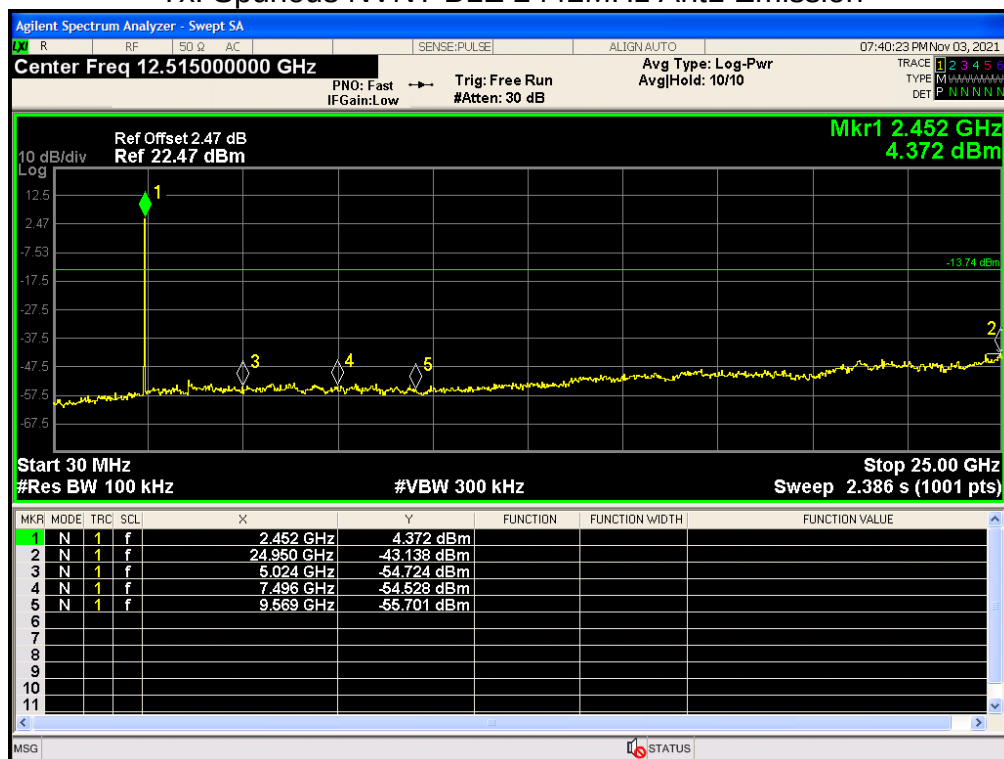

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

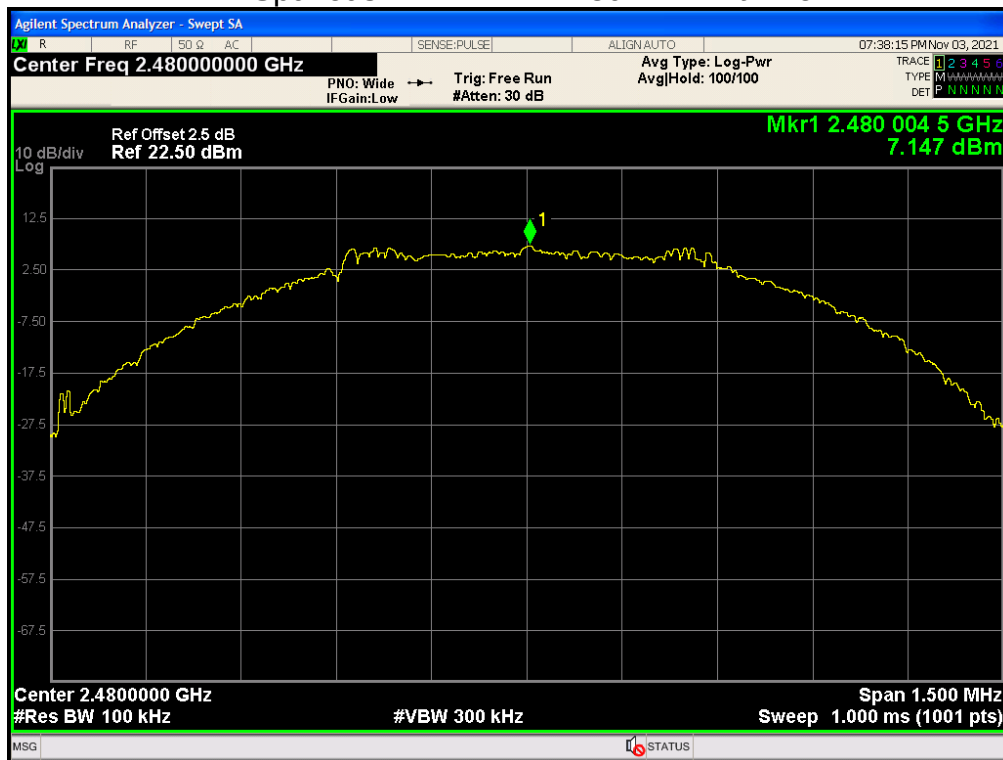

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

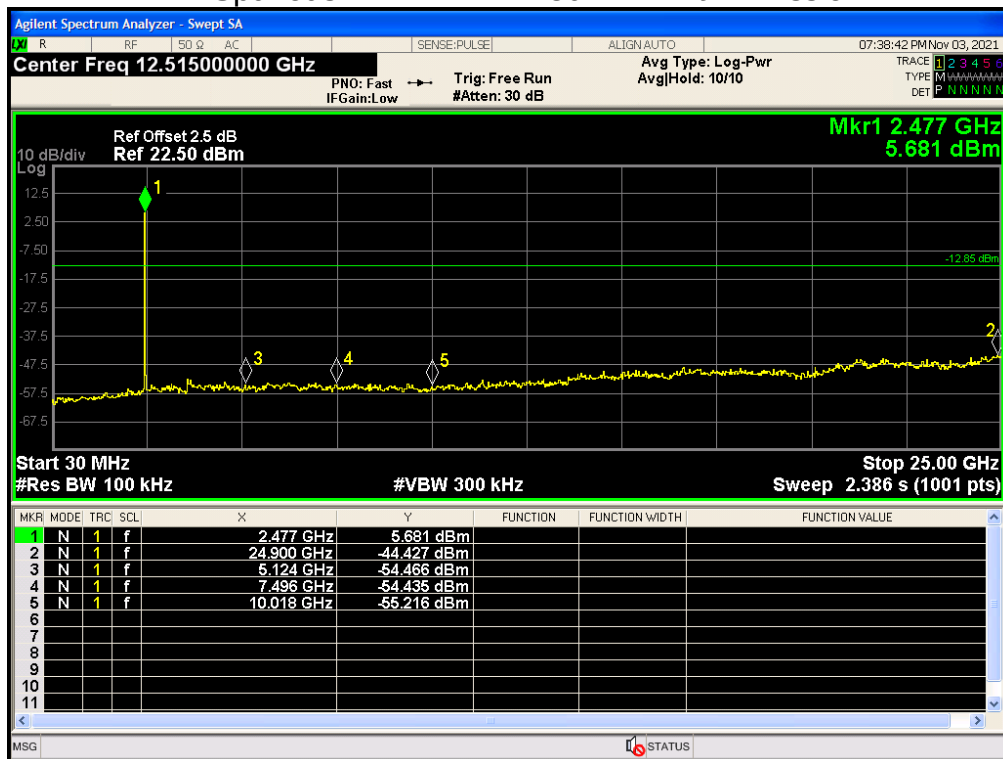


Appendix A – BLE-2M PHY


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	8.474	0	8.474	30	Pass
NVNT	BLE	2442	Ant 1	7.804	0	7.804	30	Pass
NVNT	BLE	2480	Ant 1	8.676	0	8.676	30	Pass


Power NVNT BLE 2402MHz Ant1

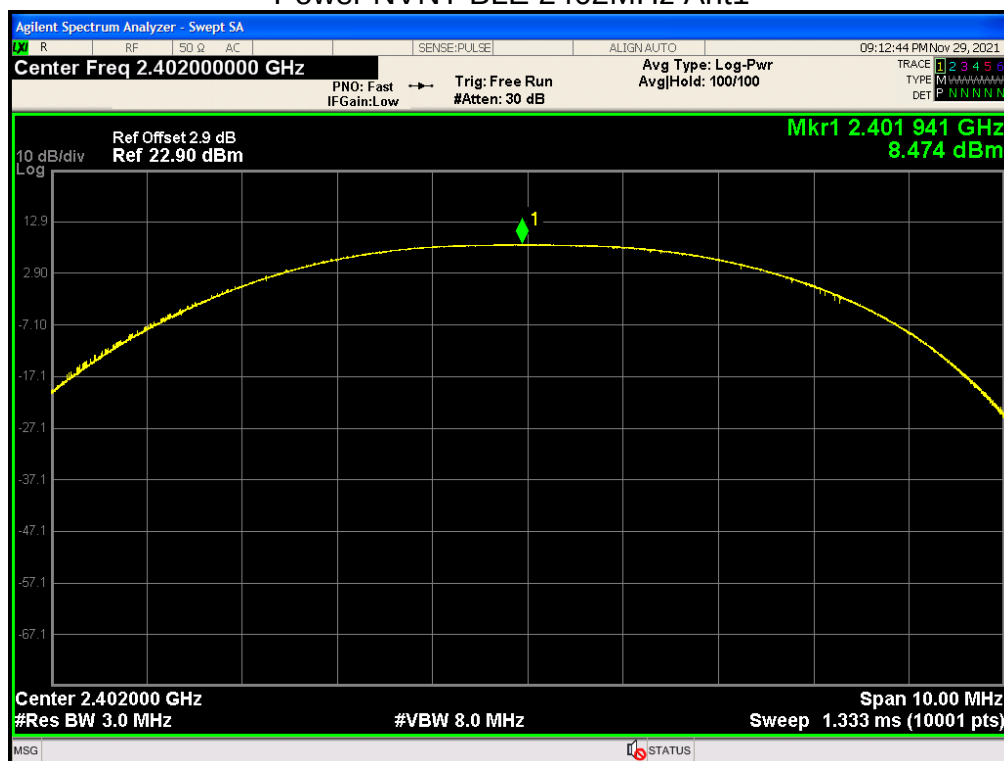

Power NVNT BLE 2442MHz Ant1

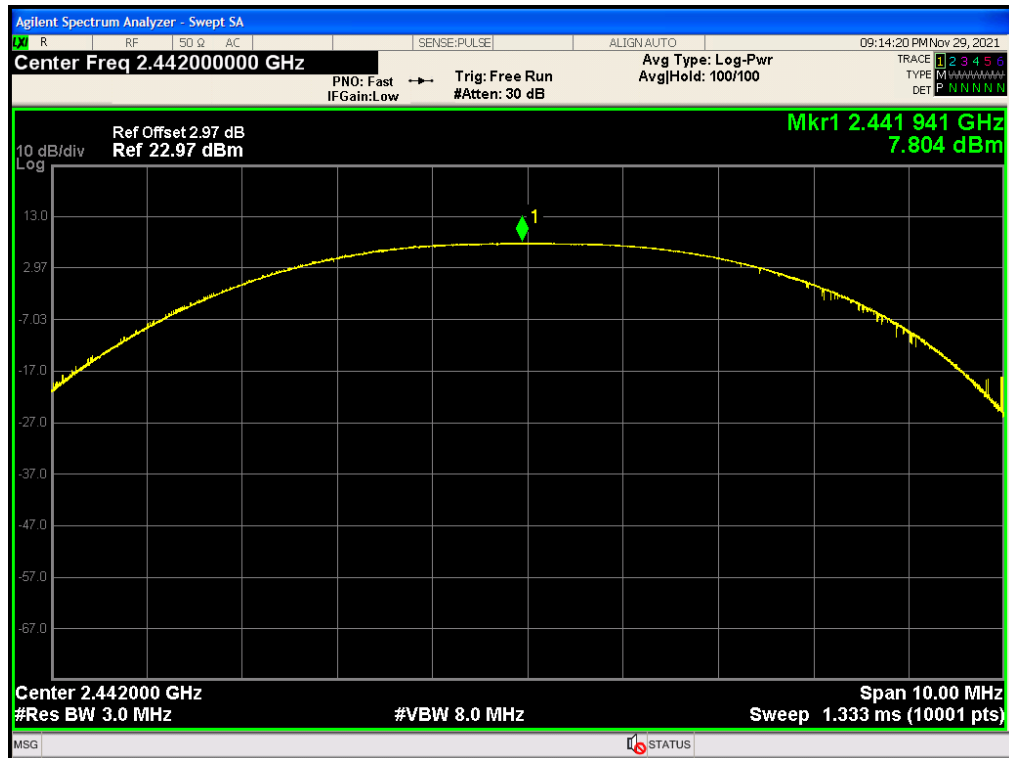


Power NVNT BLE 2480MHz Ant1

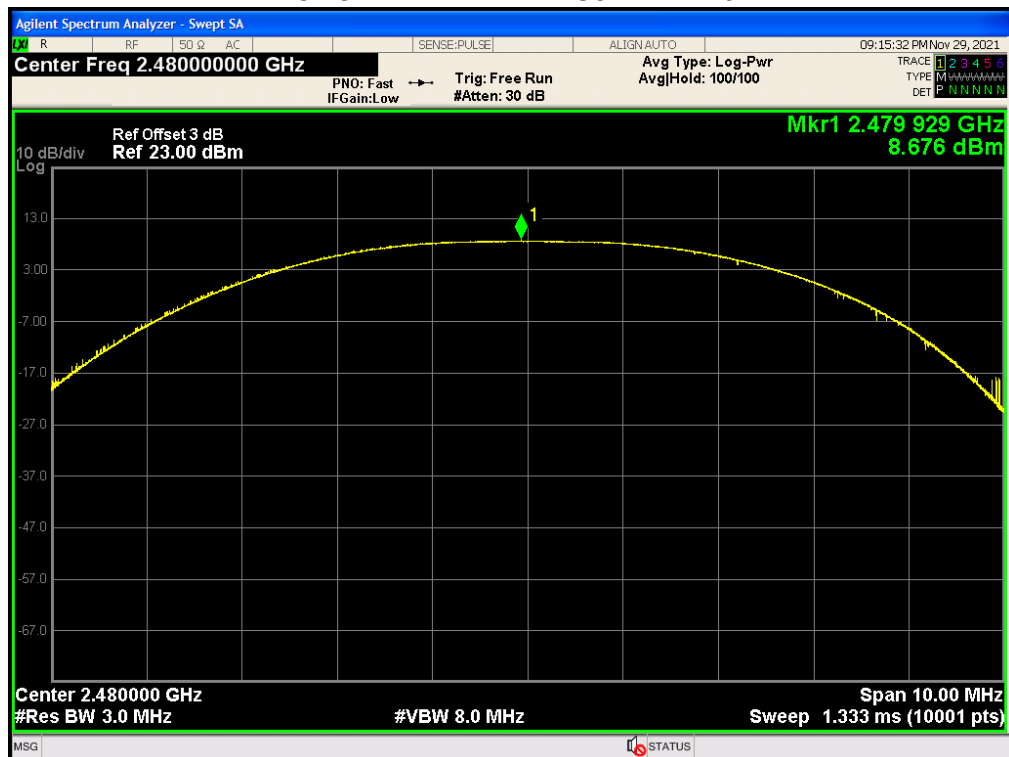


-26 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	1.2112	0.5	Pass
NVNT	BLE	2442	Ant 1	1.3006	0.5	Pass
NVNT	BLE	2480	Ant 1	1.0438	0.5	Pass


OBW NVNT BLE 2402MHz Ant1

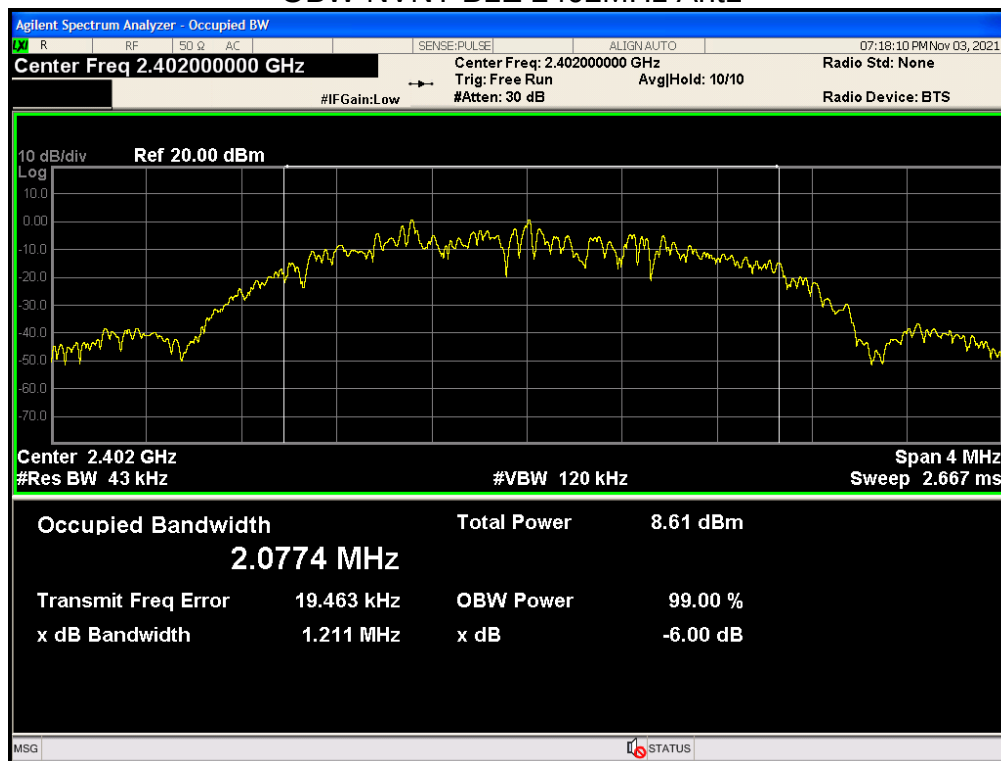

OBW NVNT BLE 2442MHz Ant1

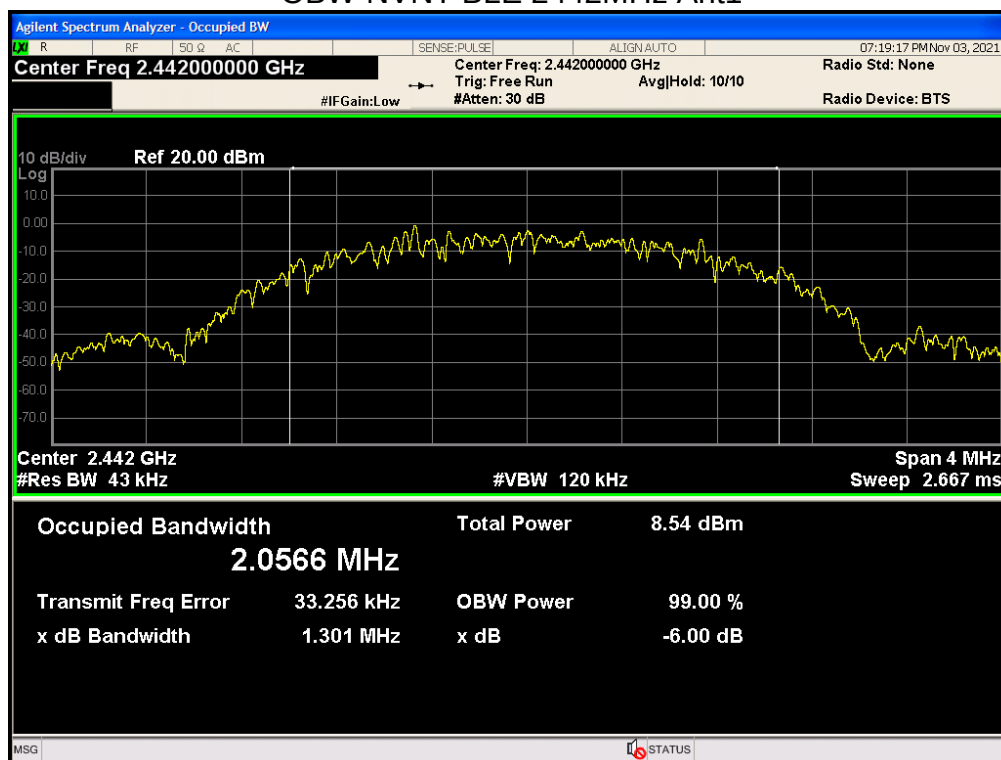


OBW NVNT BLE 2480MHz Ant1

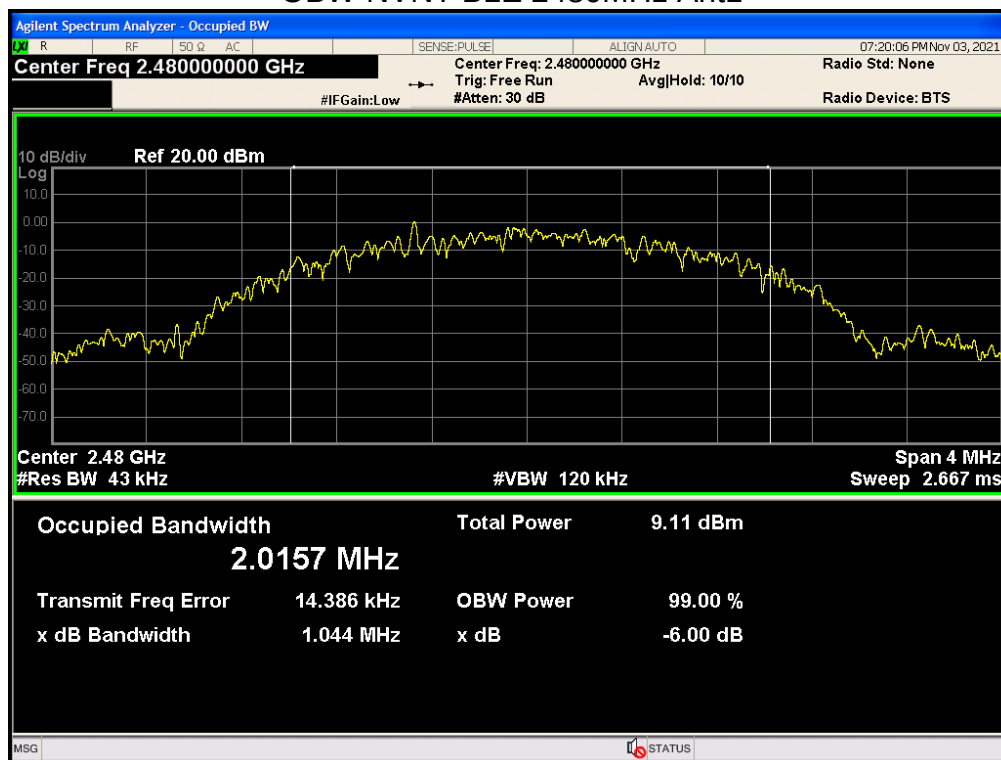


99% Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant 1	2.0563
NVNT	BLE	2442	Ant 1	2.0246
NVNT	BLE	2480	Ant 1	2.0322


OBW NVNT BLE 2402MHz Ant1

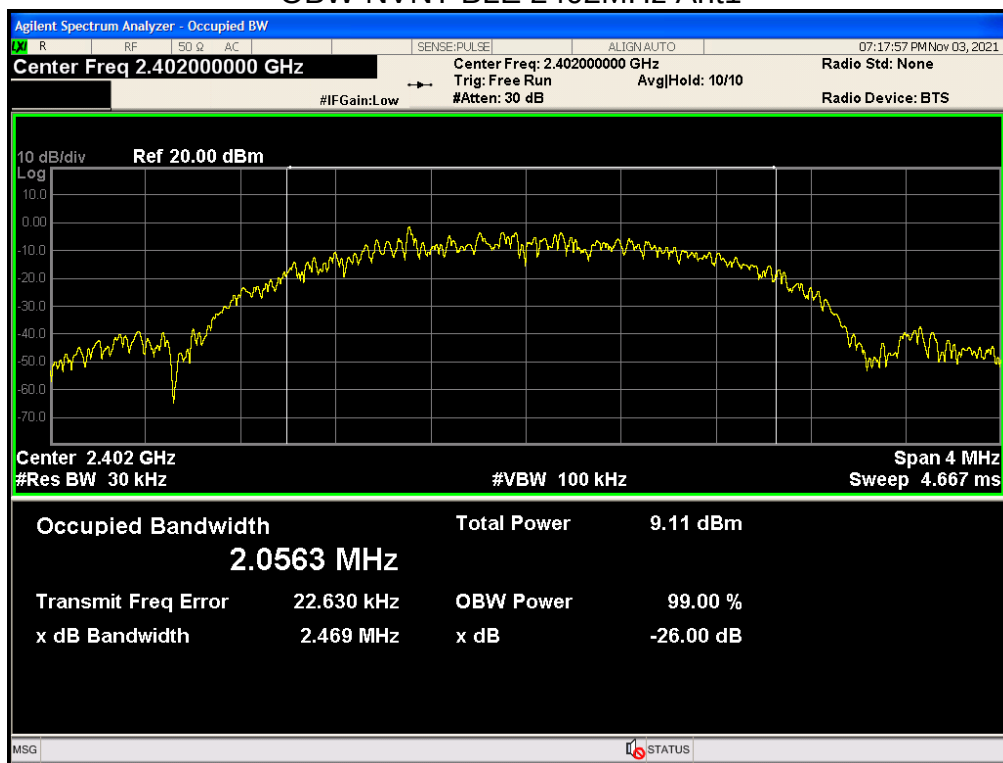

OBW NVNT BLE 2442MHz Ant1

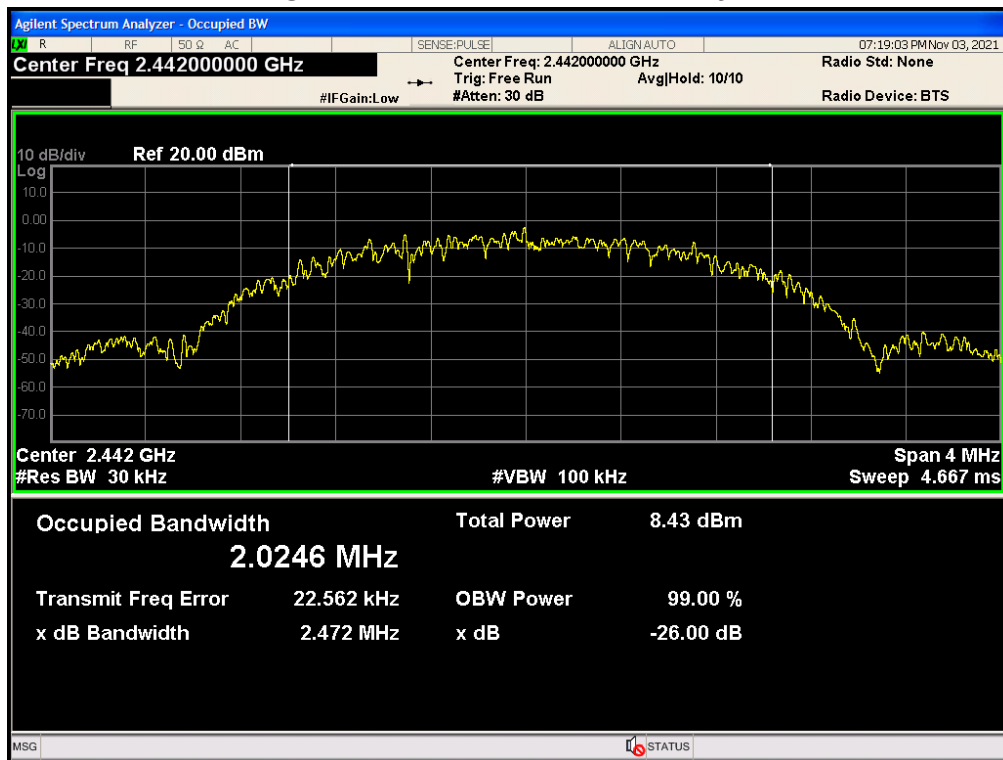


OBW NVNT BLE 2480MHz Ant1

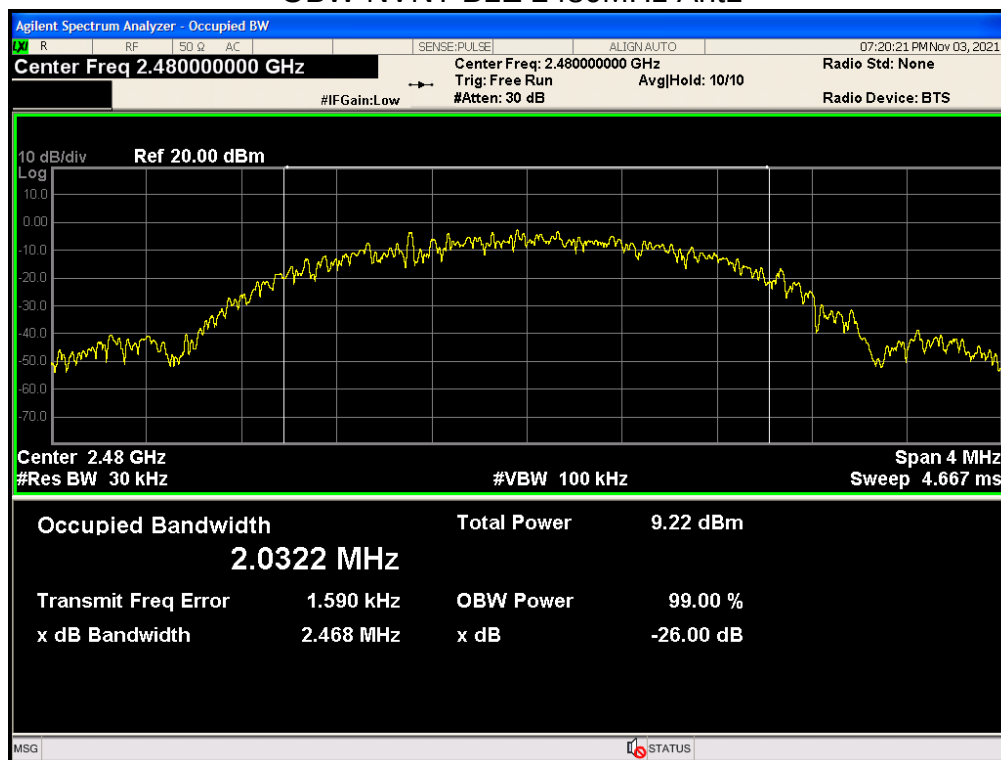


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	-10.811	8	Pass
NVNT	BLE	2442	Ant 1	-11.499	8	Pass
NVNT	BLE	2480	Ant 1	-10.498	8	Pass


PSD NVNT BLE 2402MHz Ant1

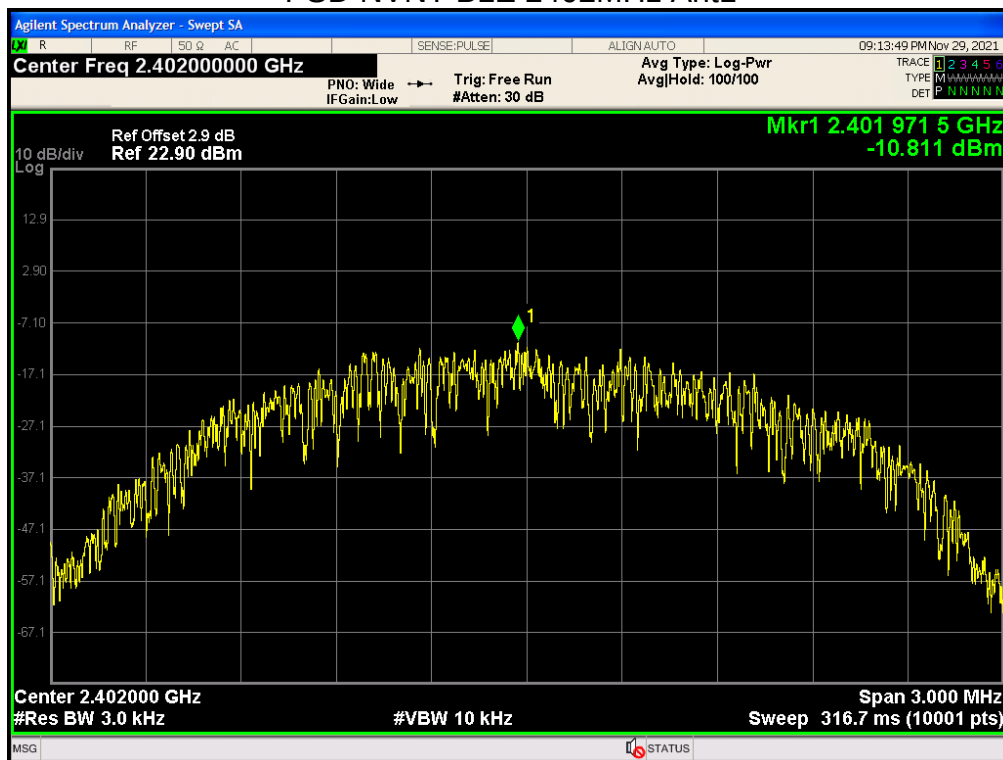

PSD NVNT BLE 2442MHz Ant1

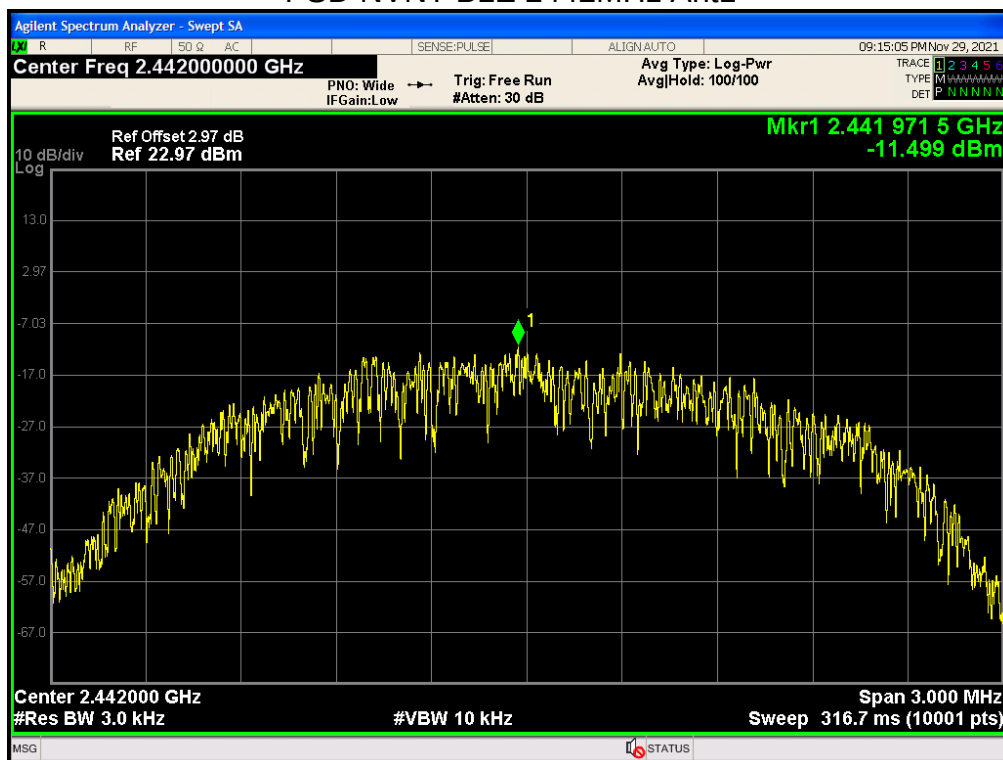


PSD NVNT BLE 2480MHz Ant1

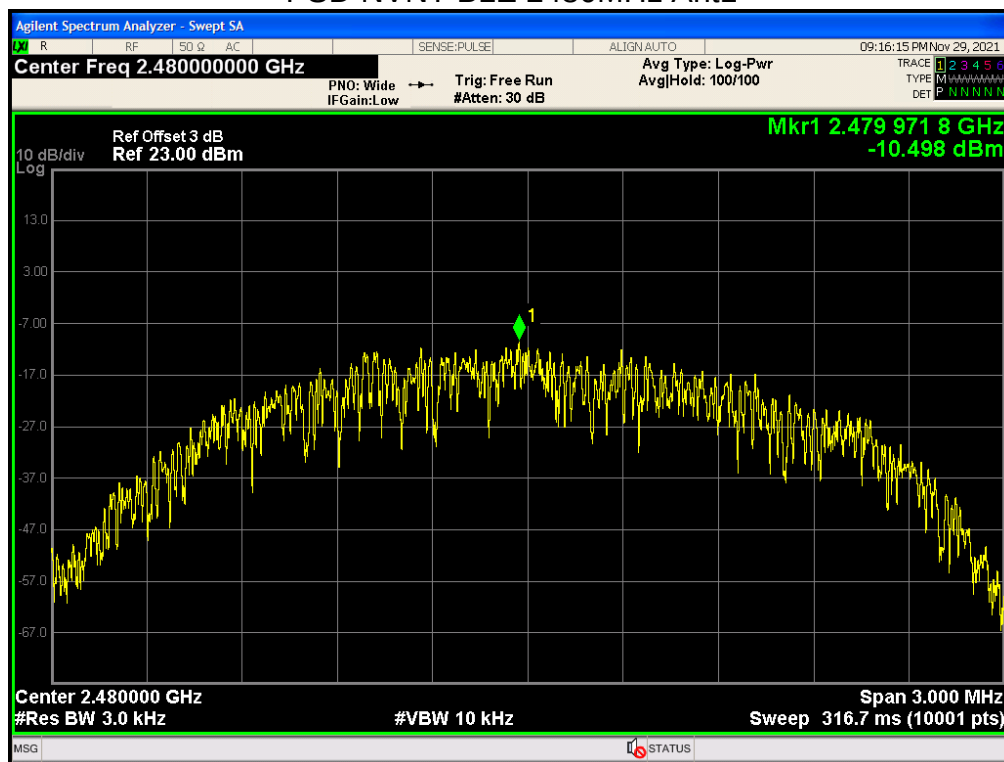


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-58.529	-20	Pass
NVNT	BLE	2480	Ant 1	-53.379	-20	Pass


Band Edge NVNT BLE 2402MHz Ant1 Ref

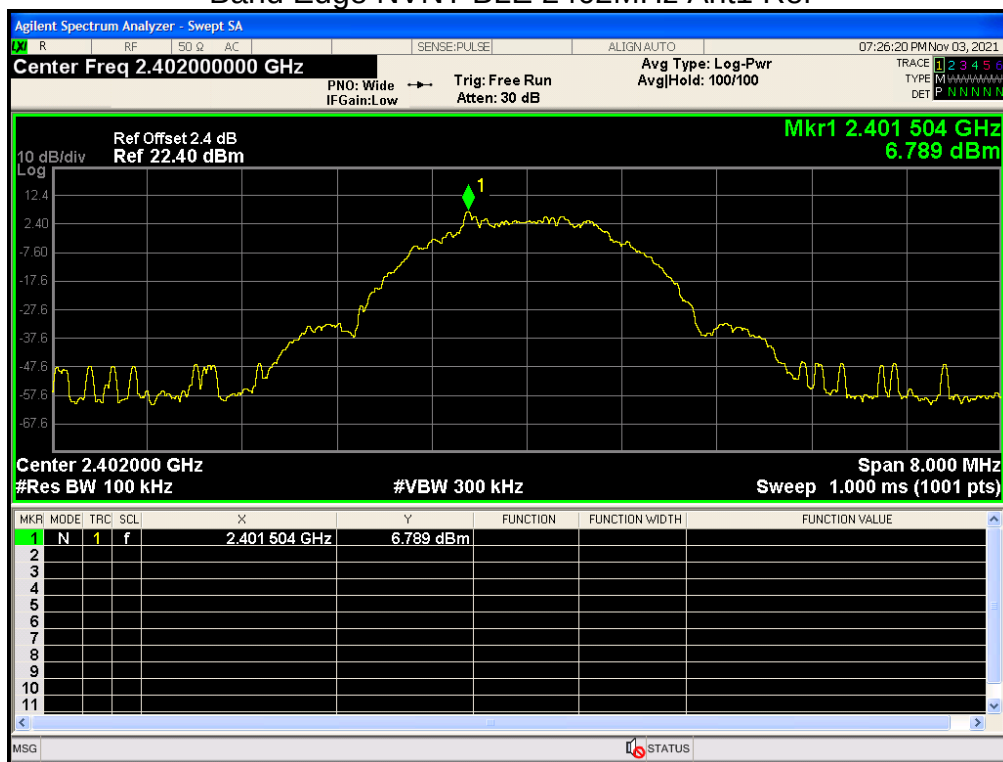


Band Edge NVNT BLE 2402MHz Ant1 Emission

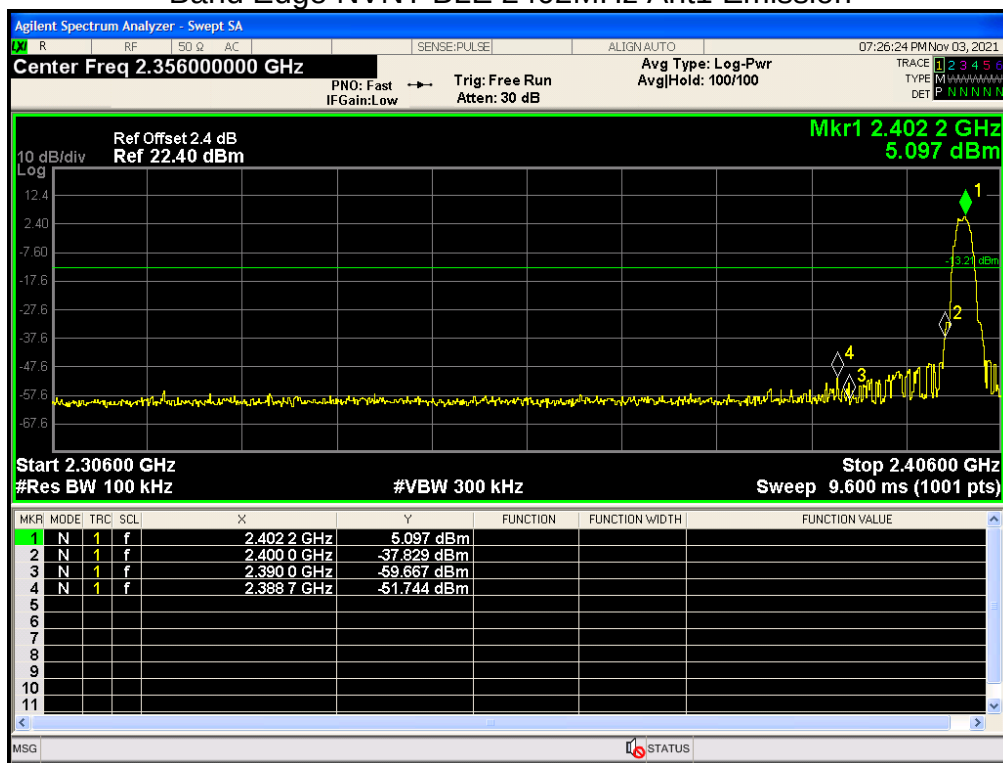

Band Edge NVNT BLE 2480MHz Ant1 Ref

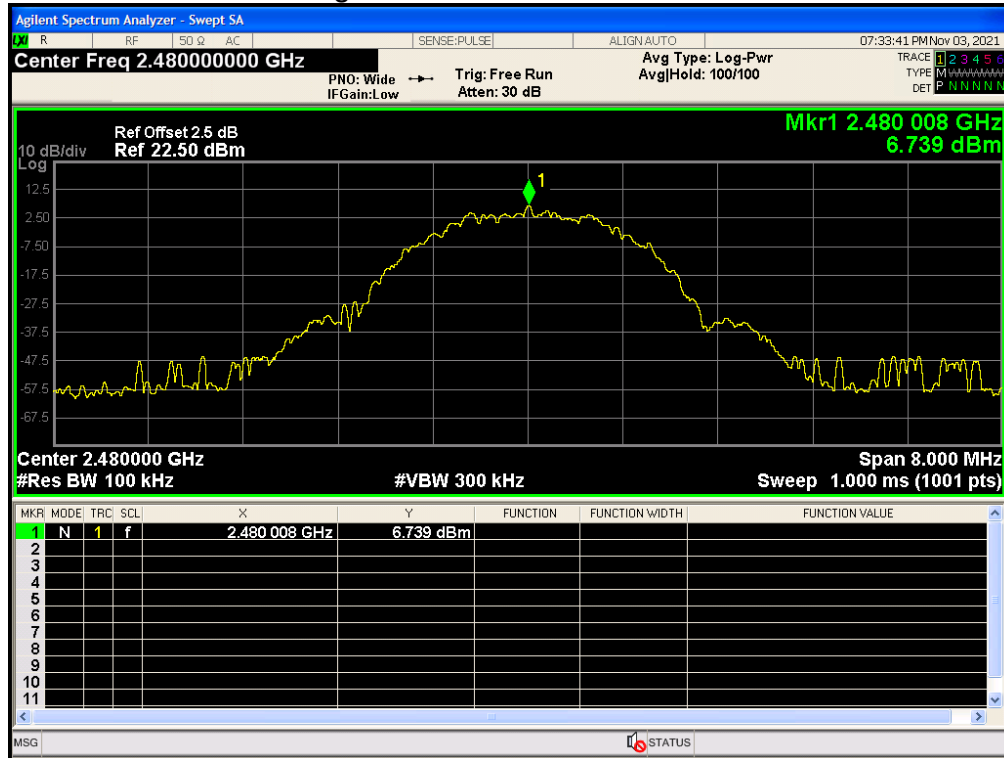

Band Edge NVNT BLE 2480MHz Ant1 Emission

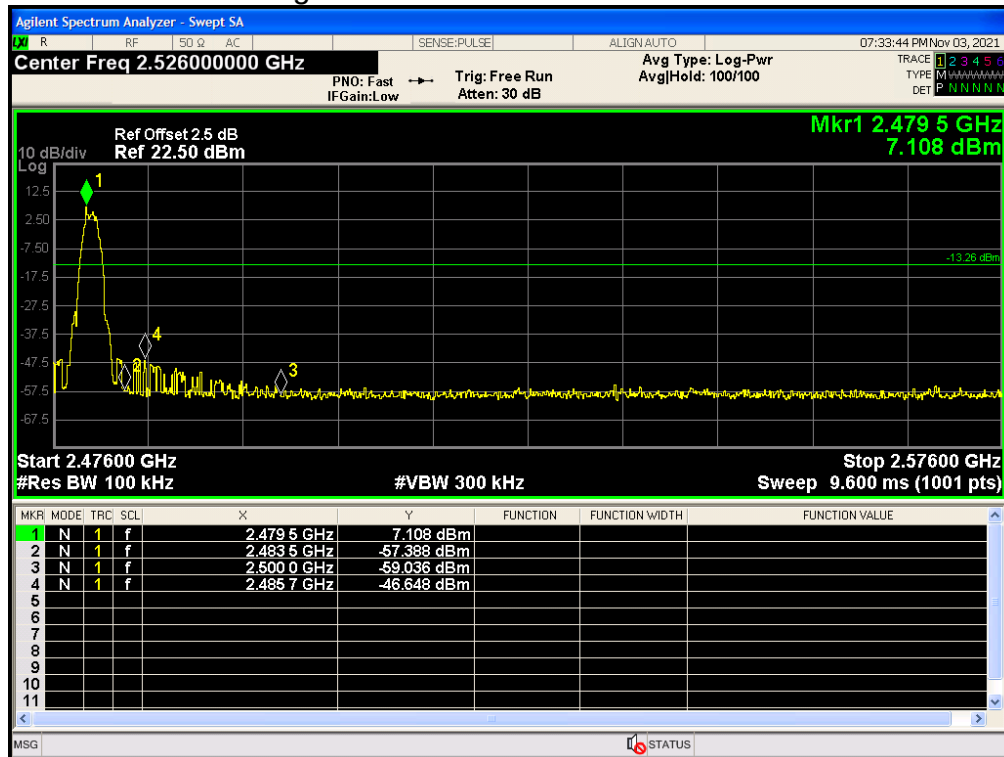


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-50.661	-20	Pass
NVNT	BLE	2442	Ant 1	-49.968	-20	Pass
NVNT	BLE	2480	Ant 1	-50.554	-20	Pass

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

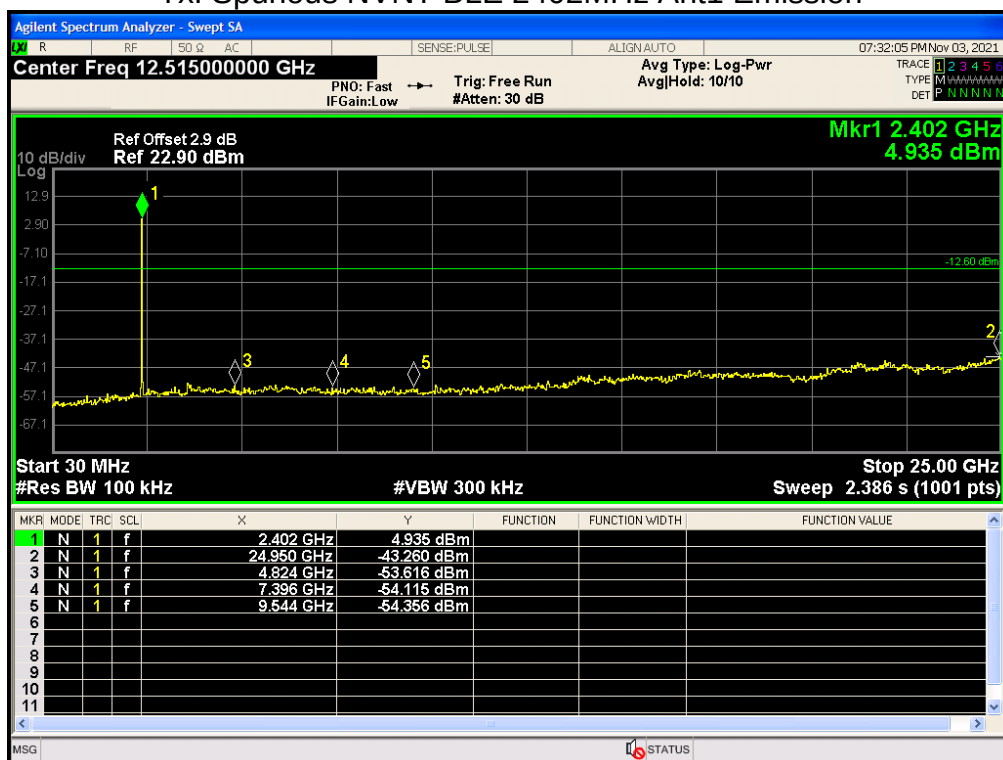


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref




Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

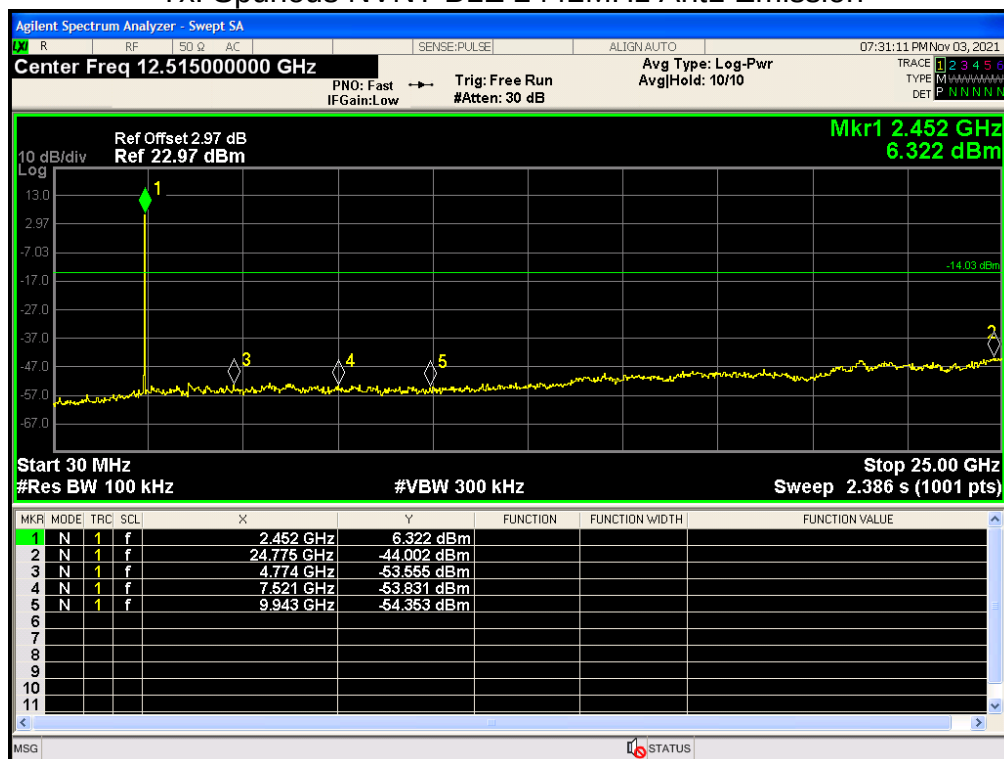

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

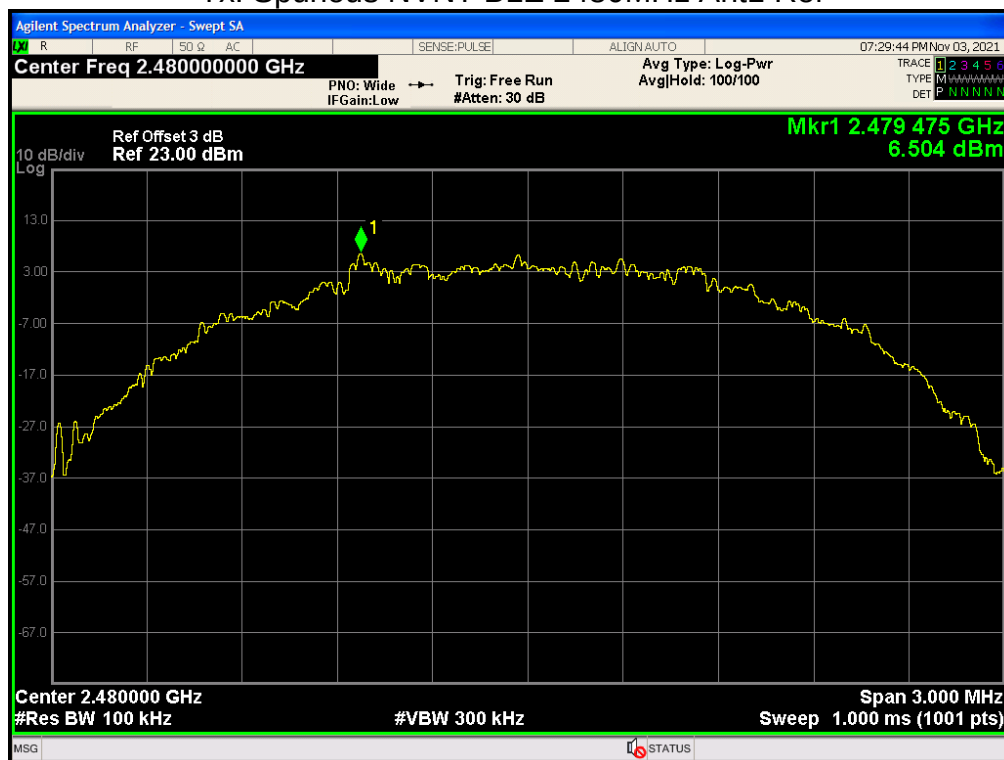

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

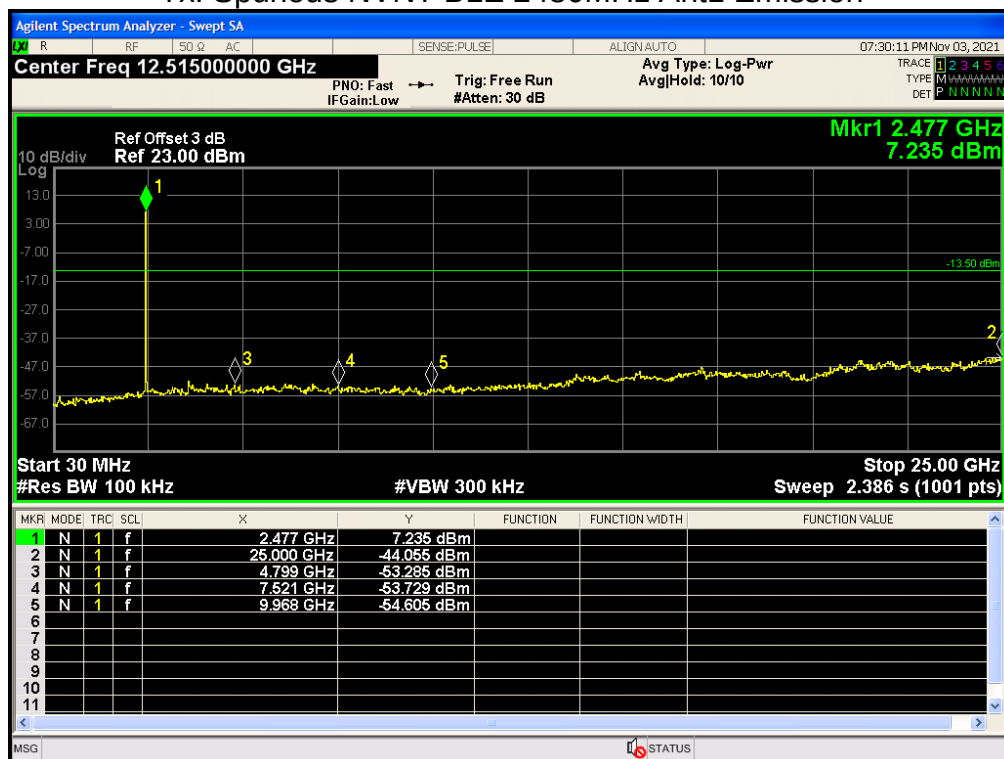


Appendix A – BLE-Coded PHY,S=2


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-50.661	-20	Pass
NVNT	BLE	2442	Ant 1	-49.968	-20	Pass
NVNT	BLE	2480	Ant 1	-50.554	-20	Pass

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

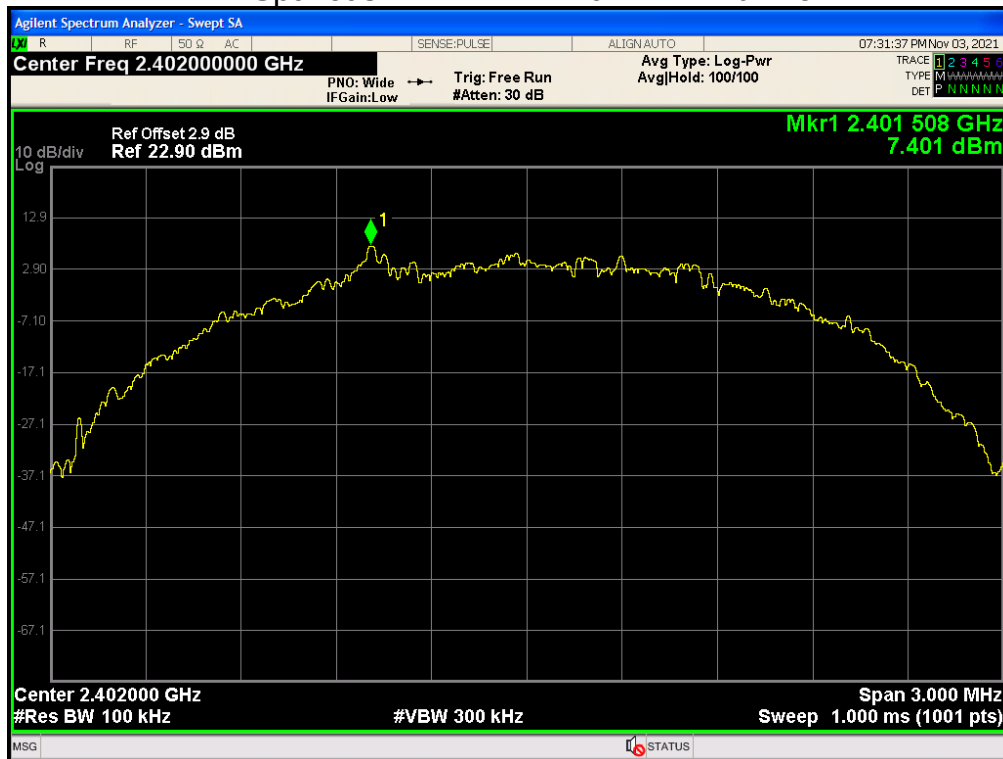


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

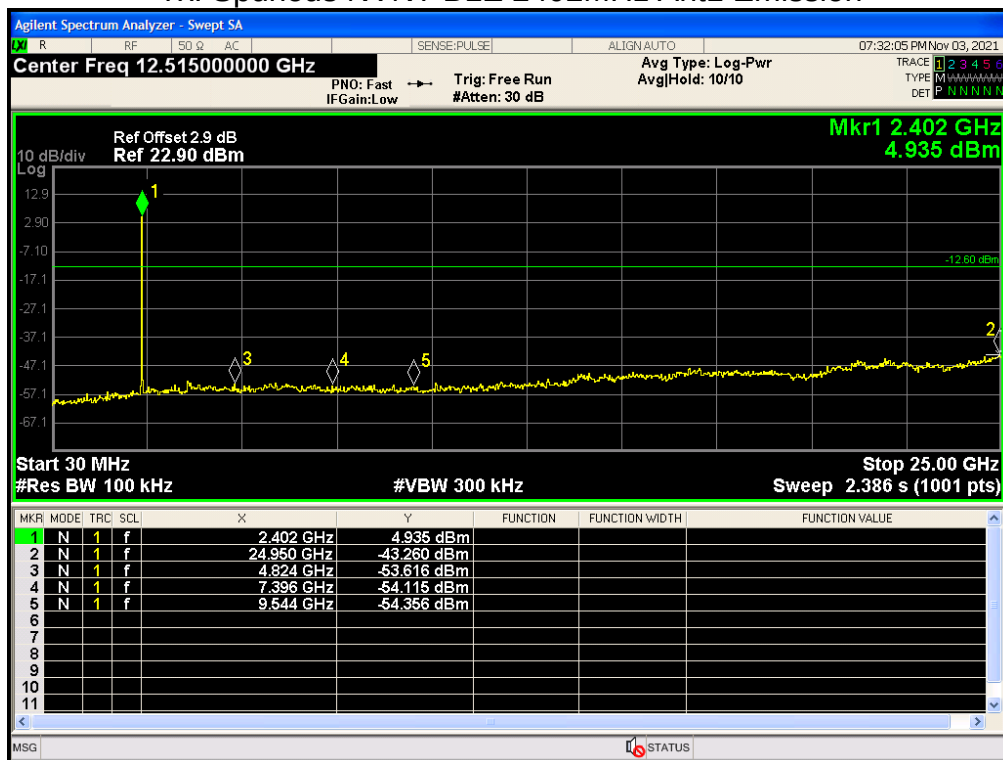


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref




Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

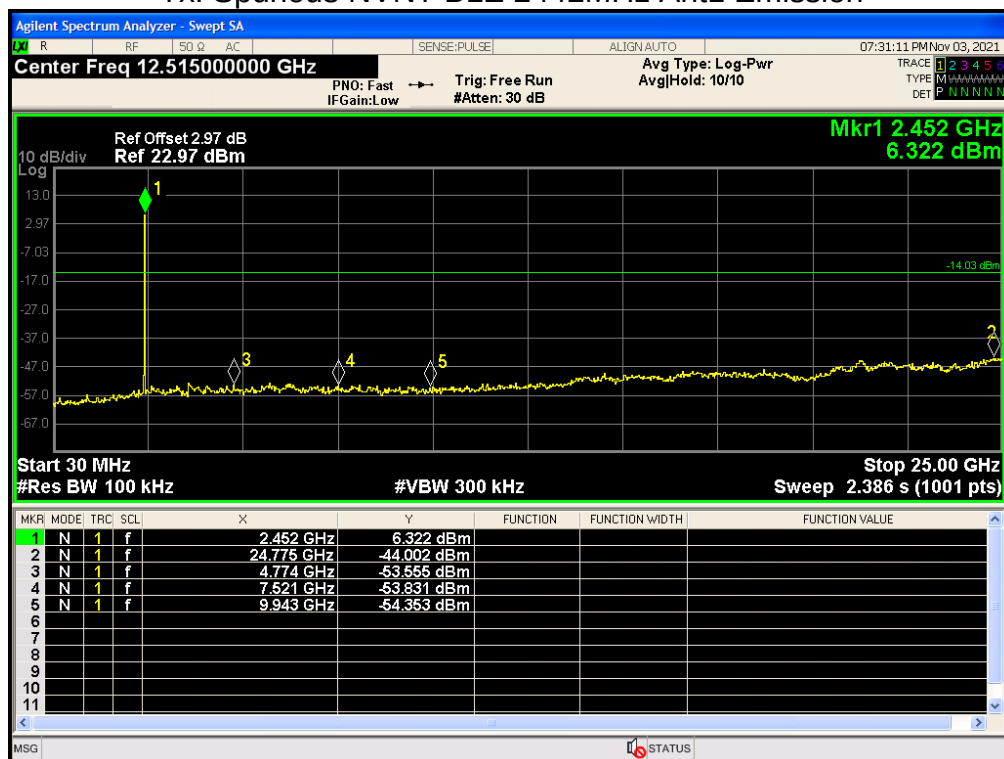

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

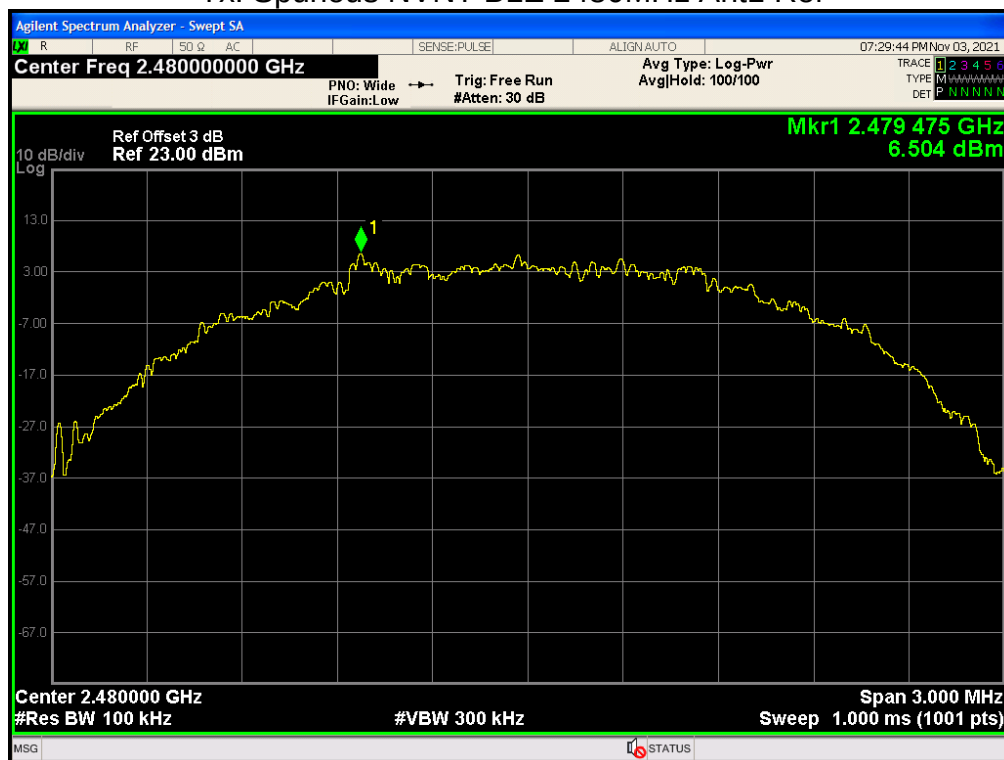


Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

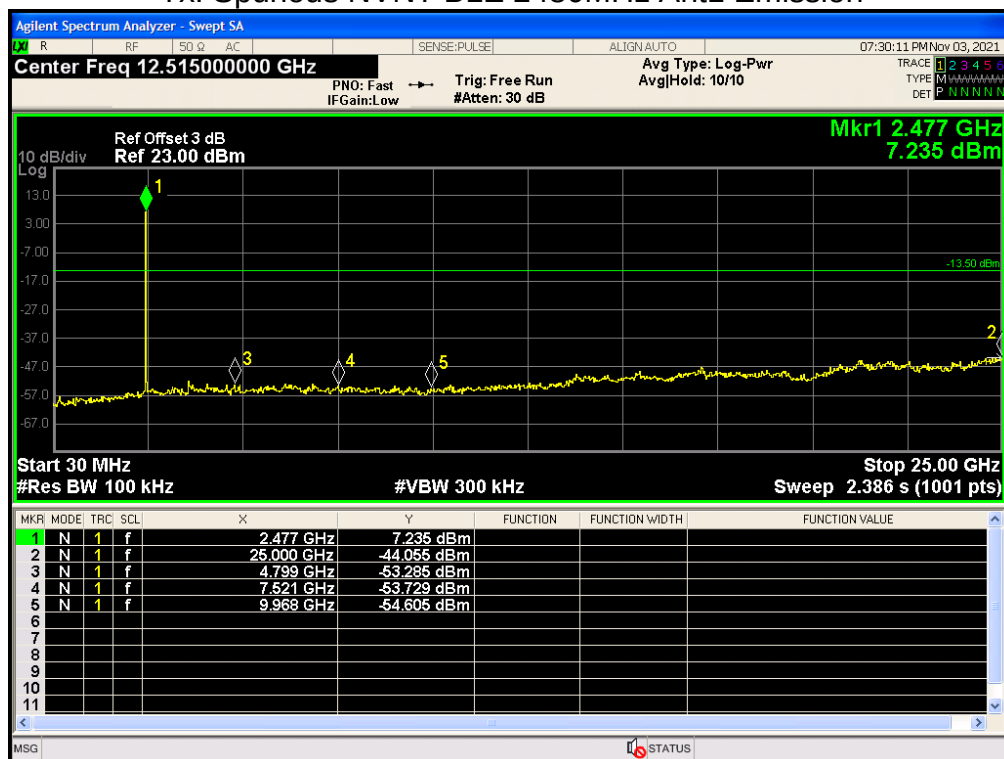


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	8.527	0	8.527	30	Pass
NVNT	BLE	2442	Ant 1	7.841	0	7.841	30	Pass
NVNT	BLE	2480	Ant 1	8.69	0	8.69	30	Pass


Power NVNT BLE 2402MHz Ant1

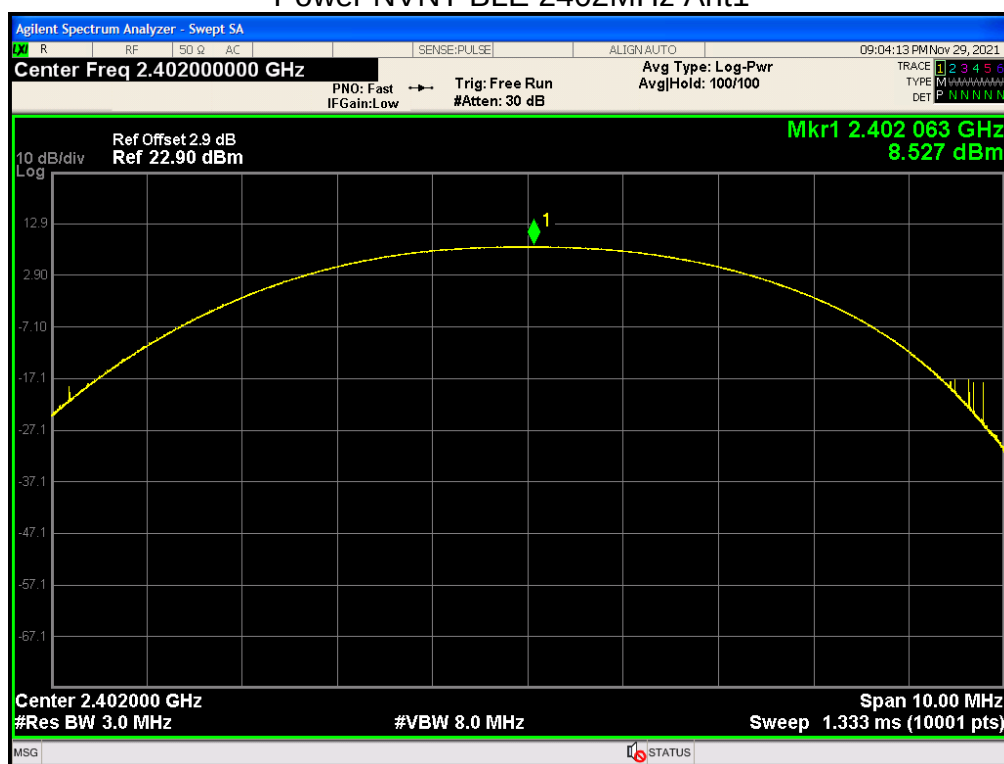

Power NVNT BLE 2442MHz Ant1

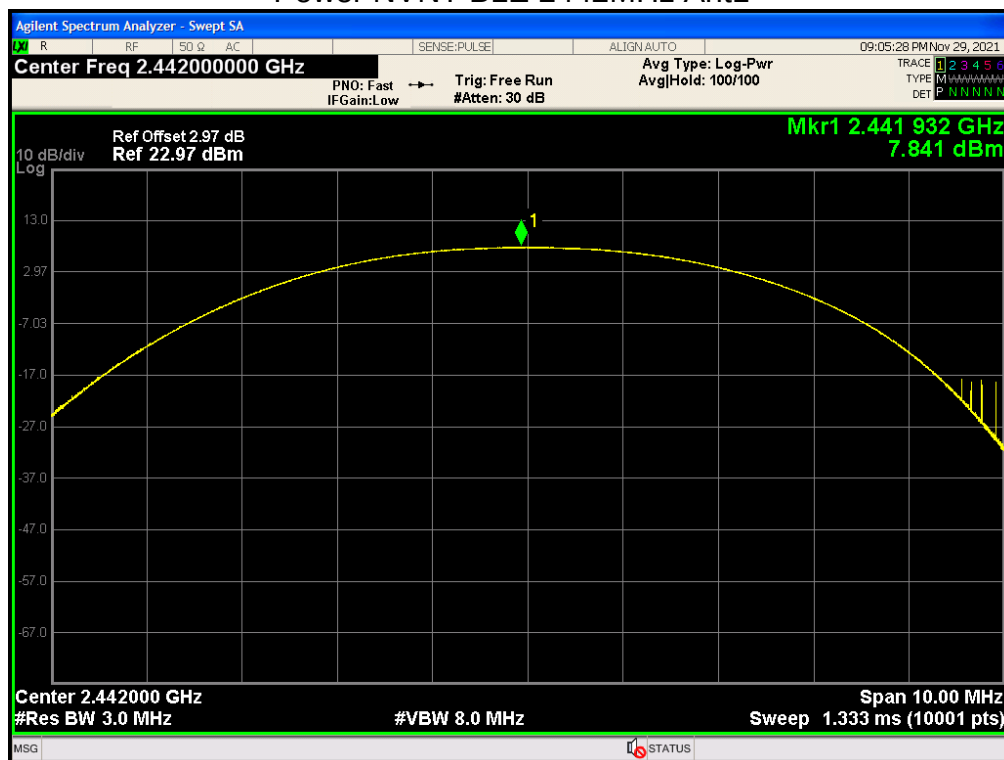


Power NVNT BLE 2480MHz Ant1

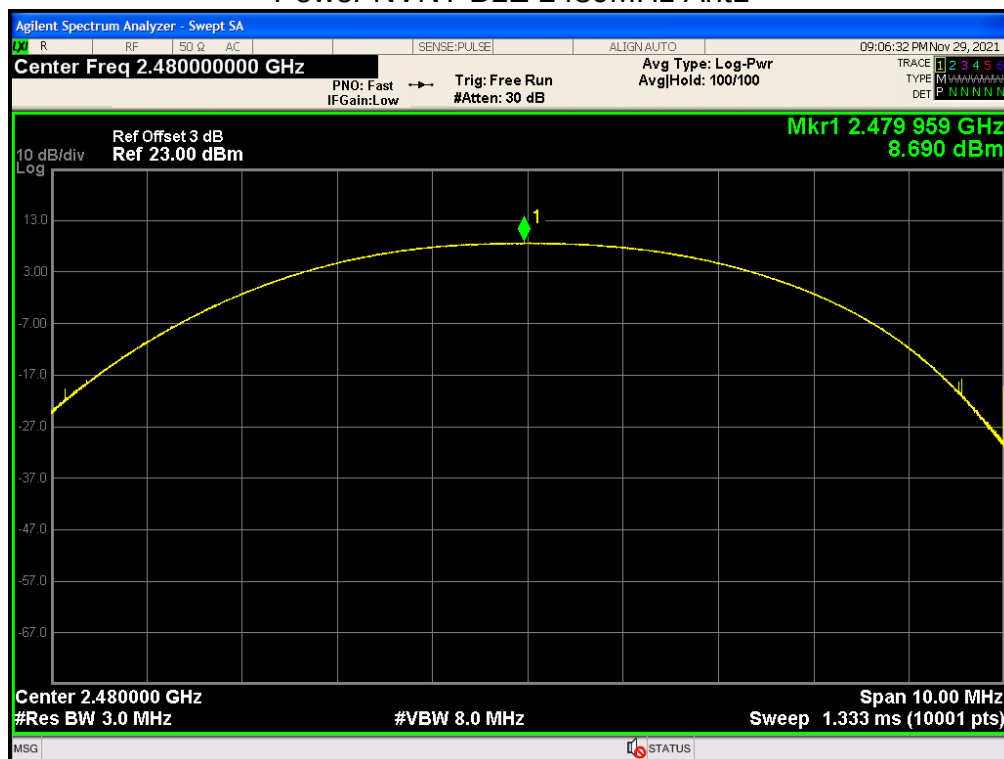


-6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	0.6833	0.5	Pass
NVNT	BLE	2442	Ant 1	0.6746	0.5	Pass
NVNT	BLE	2480	Ant 1	0.6543	0.5	Pass

OBW NVNT BLE 2402MHz Ant1

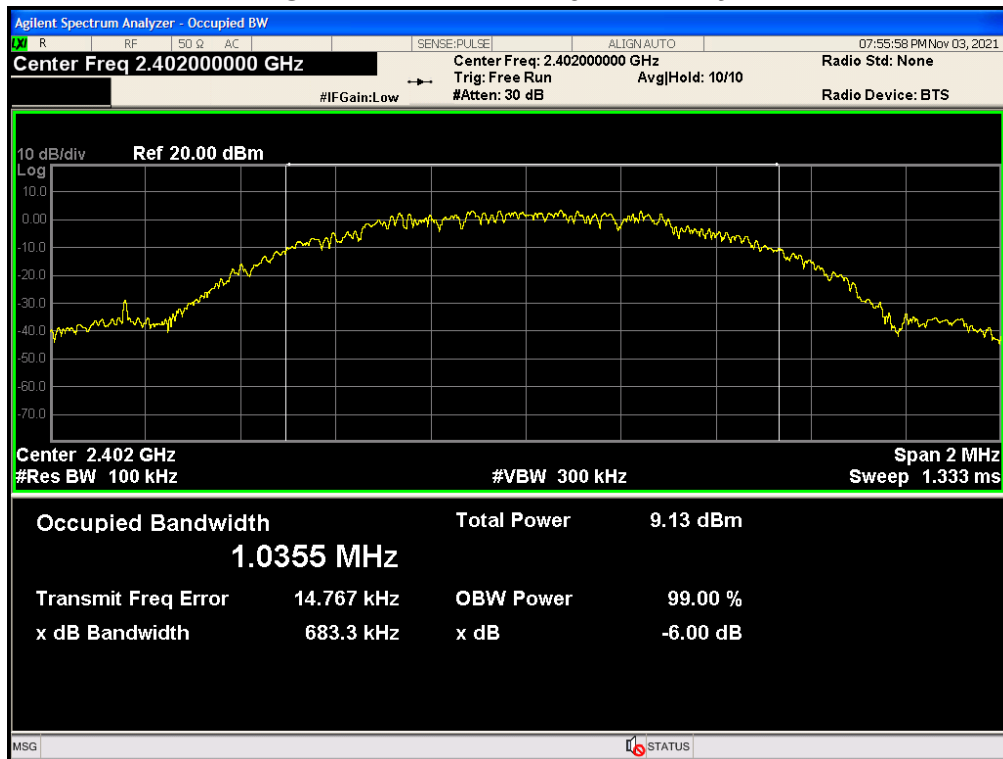

OBW NVNT BLE 2442MHz Ant1

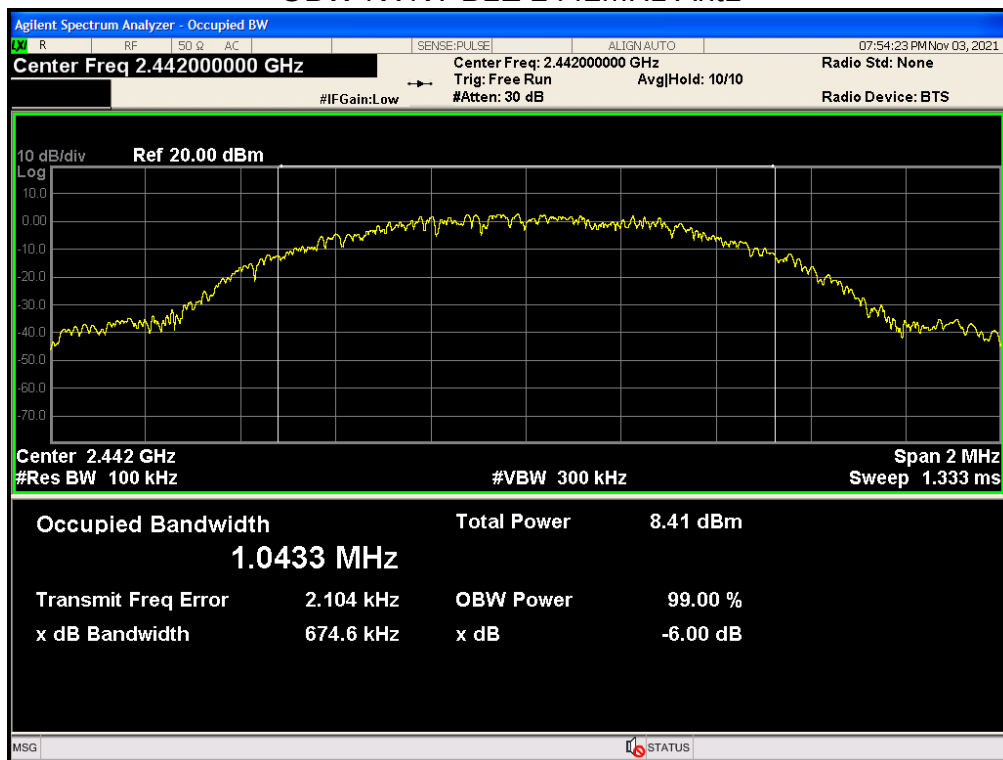

Agilent Spectrum Analyzer - Occupied BW

07:52:51 PM Nov 03, 2021

Center Freq 2.48000000 GHz

Radio Std: None

#IFGain: Low

Center Freq: 2.48000000 GHz

Trig: Free Run

Avg/Hold: 10/10

#Atten: 30 dB

Radio Device: BTS

10 dB/div

Ref 20.00 dBm

Center 2.48 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 2 MHz


Sweep 1.333 ms

Occupied Bandwidth		Total Power	
1.0416 MHz		8.97 dBm	
Transmit Freq Error	8.020 kHz	OBW Power	99.00 %
x dB Bandwidth	654.3 kHz	x dB	-6.00 dB


MSG STATUS

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant 1	1.0147
NVNT	BLE	2442	Ant 1	1.0106
NVNT	BLE	2480	Ant 1	1.0059


OBW NVNT BLE 2402MHz Ant1

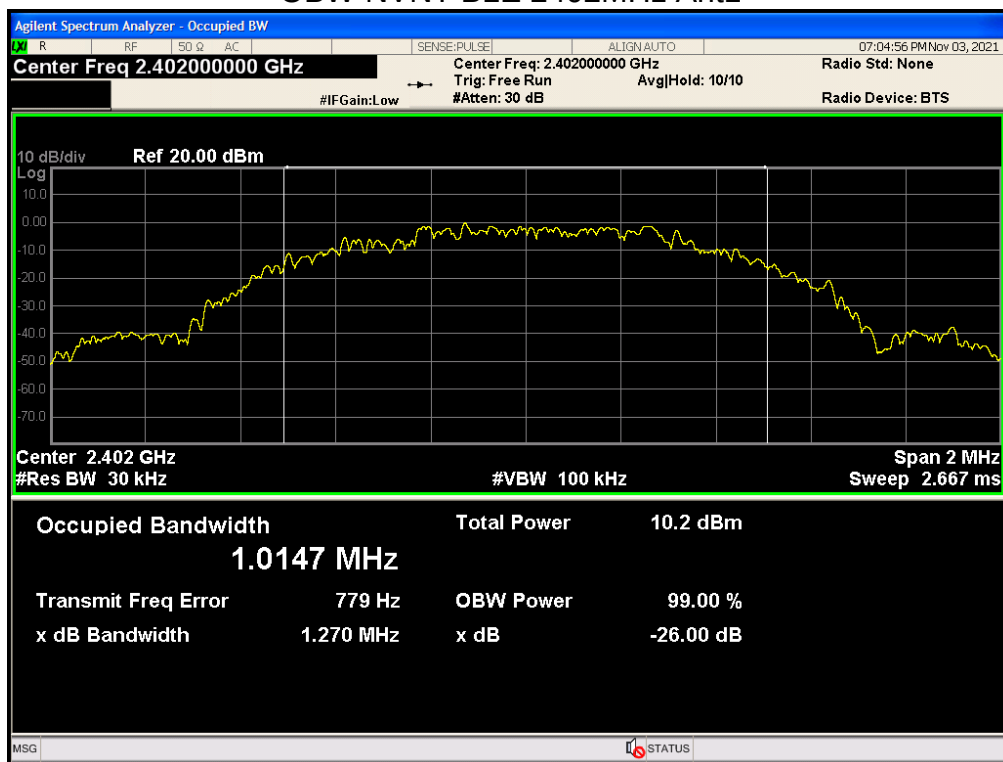

OBW NVNT BLE 2442MHz Ant1

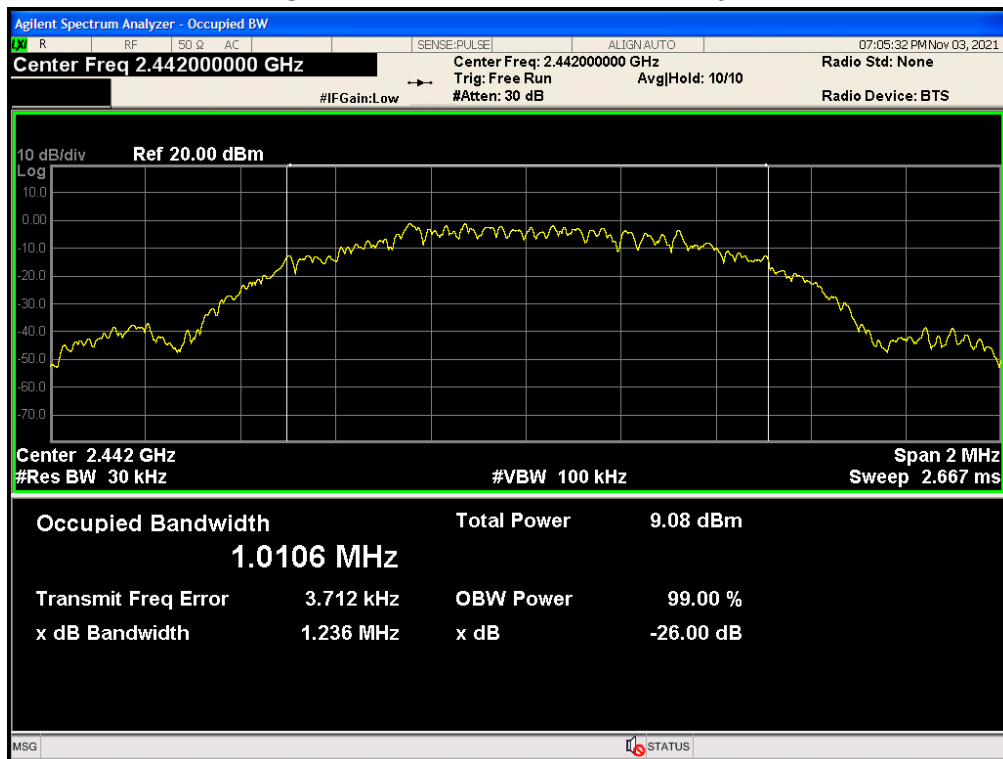


OBW NVNT BLE 2480MHz Ant1

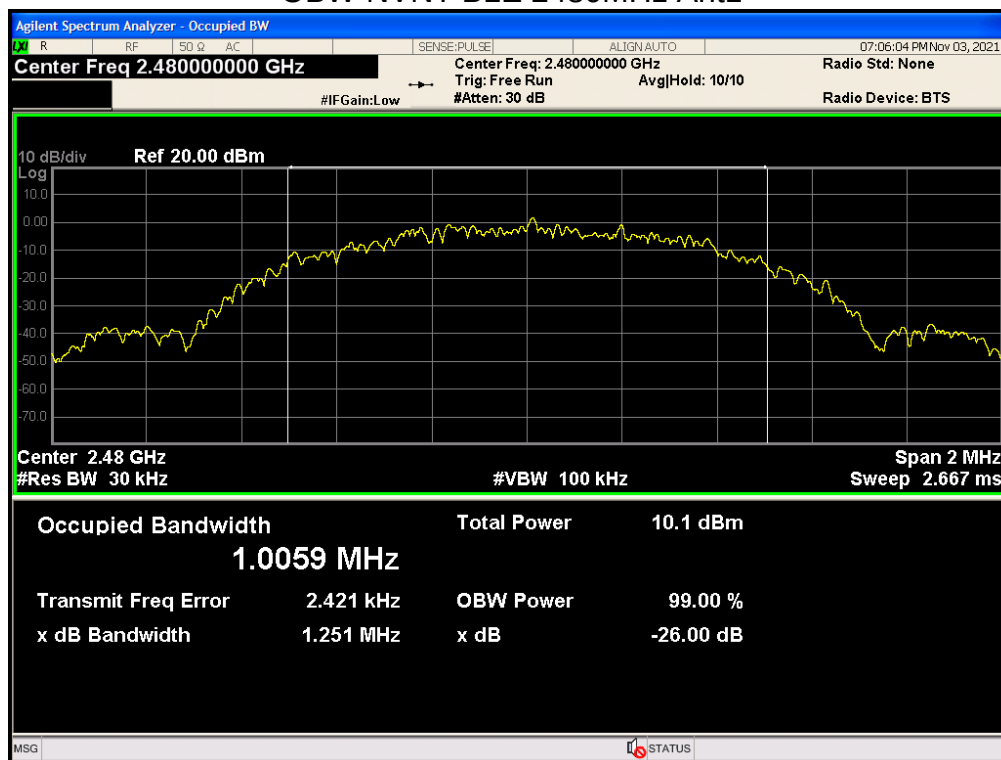


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	1.819	8	Pass
NVNT	BLE	2442	Ant 1	1.082	8	Pass
NVNT	BLE	2480	Ant 1	2.024	8	Pass


PSD NVNT BLE 2402MHz Ant1

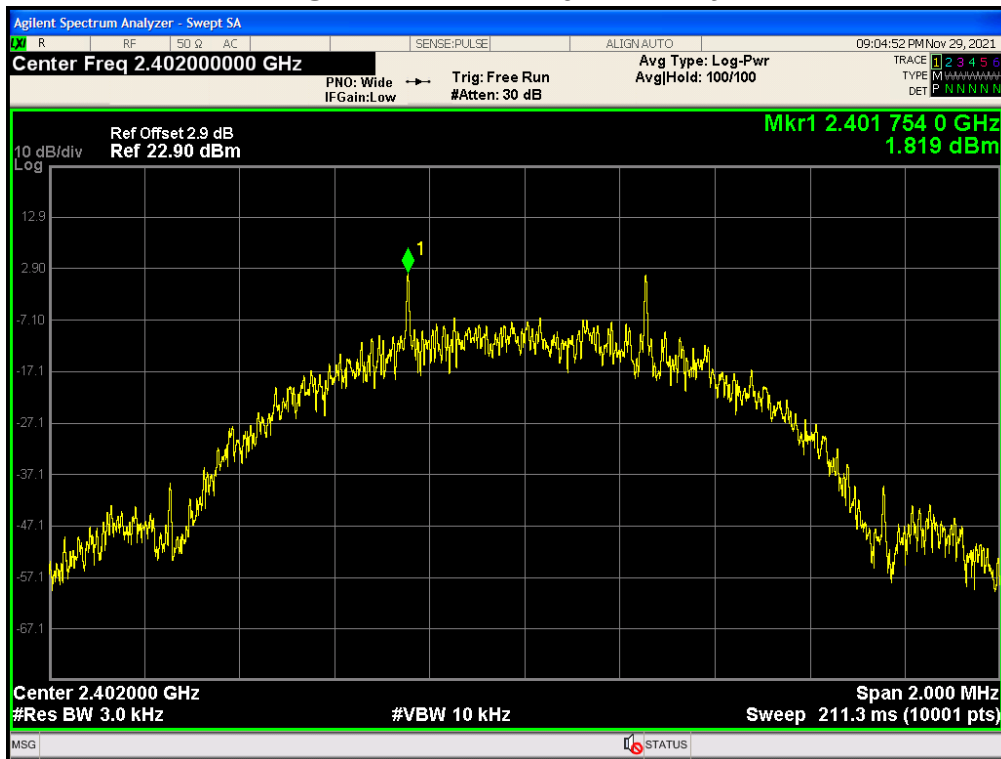

PSD NVNT BLE 2442MHz Ant1

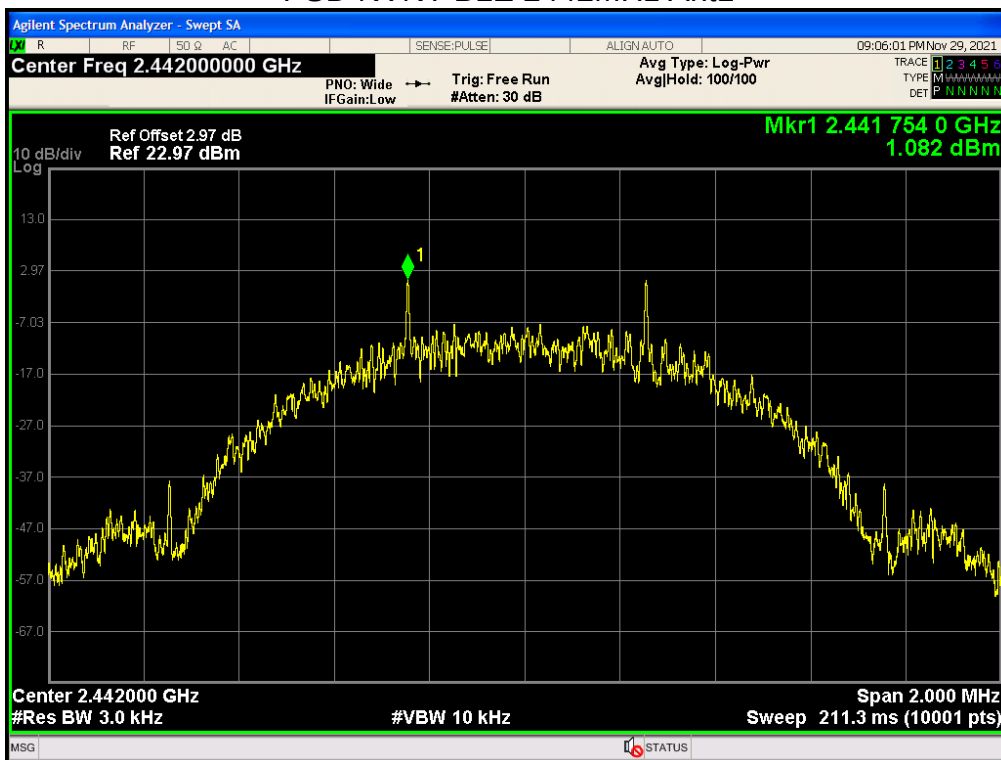


PSD NVNT BLE 2480MHz Ant1

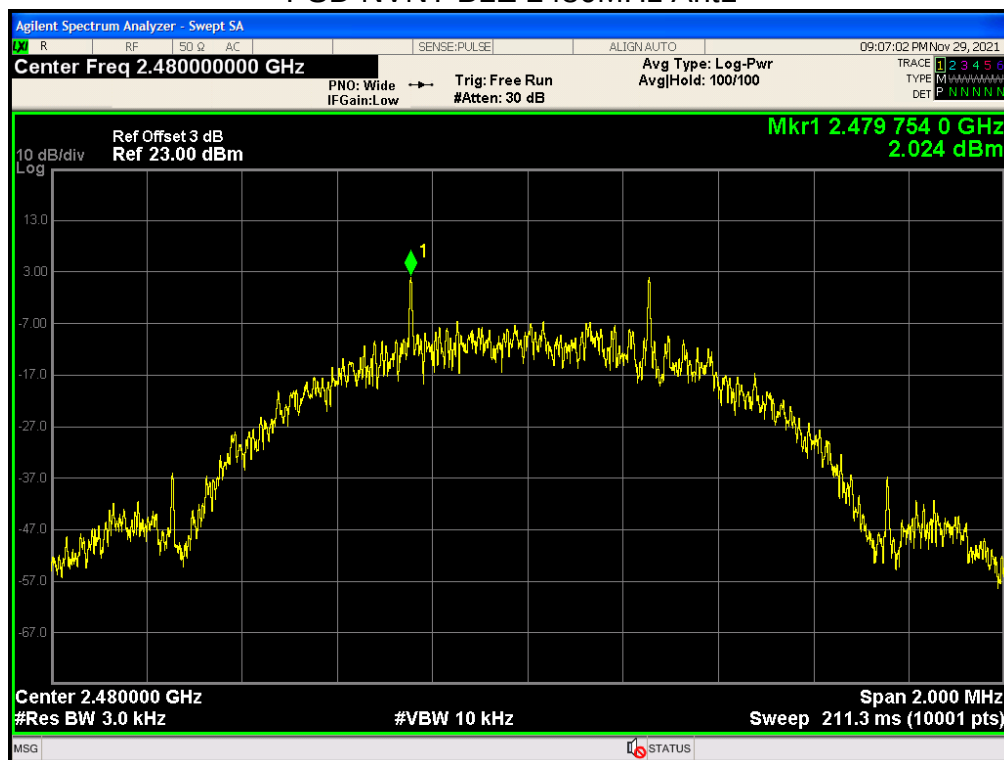


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-60.48	-20	Pass
NVNT	BLE	2480	Ant 1	-53.958	-20	Pass


Band Edge NVNT BLE 2402MHz Ant1 Ref

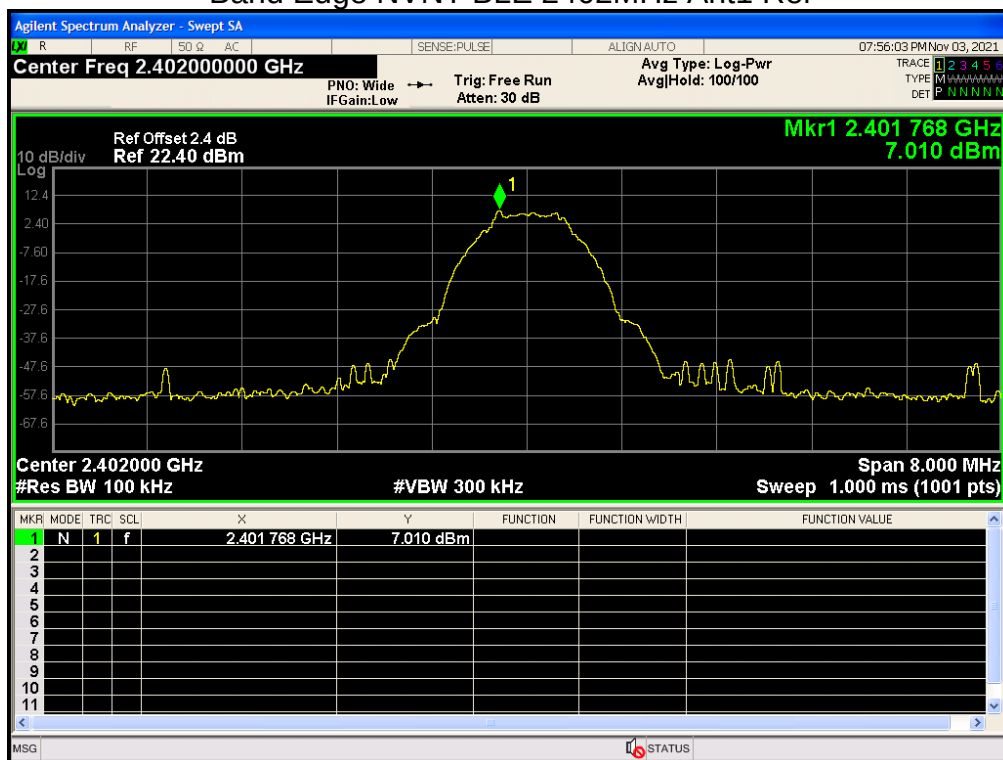


Band Edge NVNT BLE 2402MHz Ant1 Emission

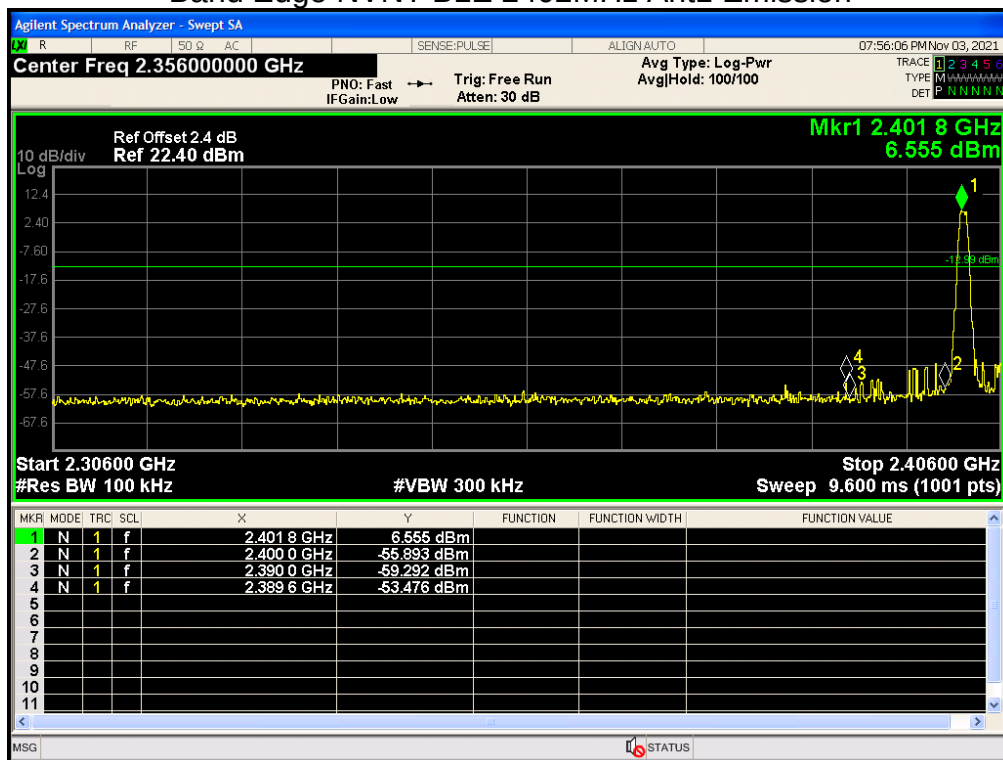

Band Edge NVNT BLE 2480MHz Ant1 Ref

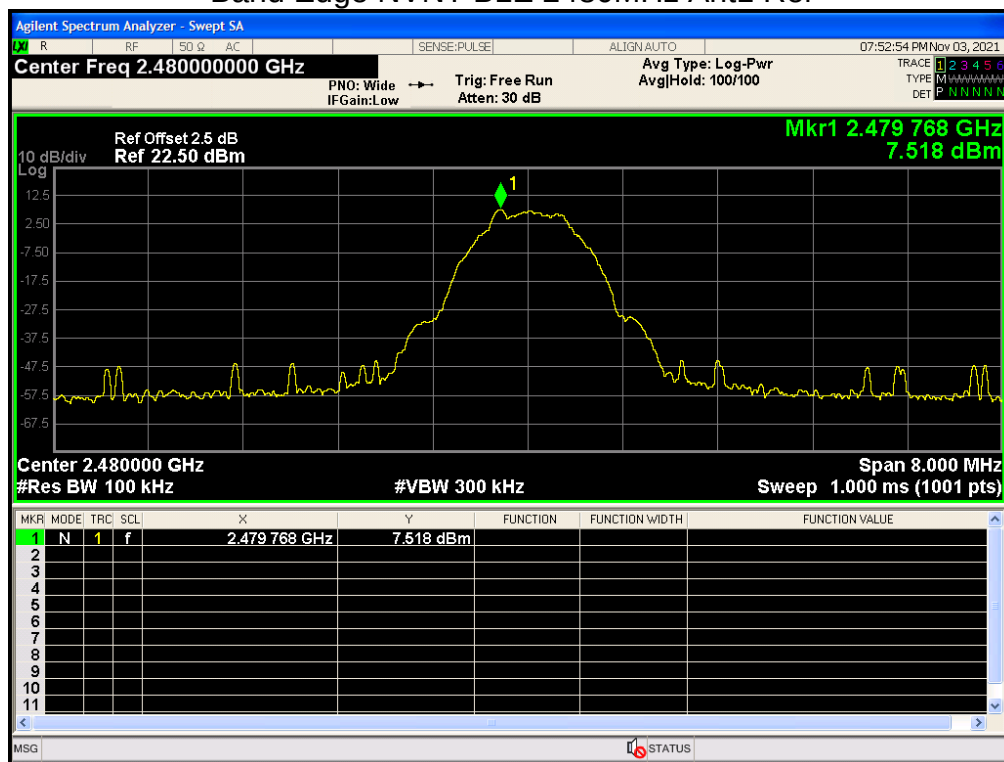


Band Edge NVNT BLE 2480MHz Ant1 Emission

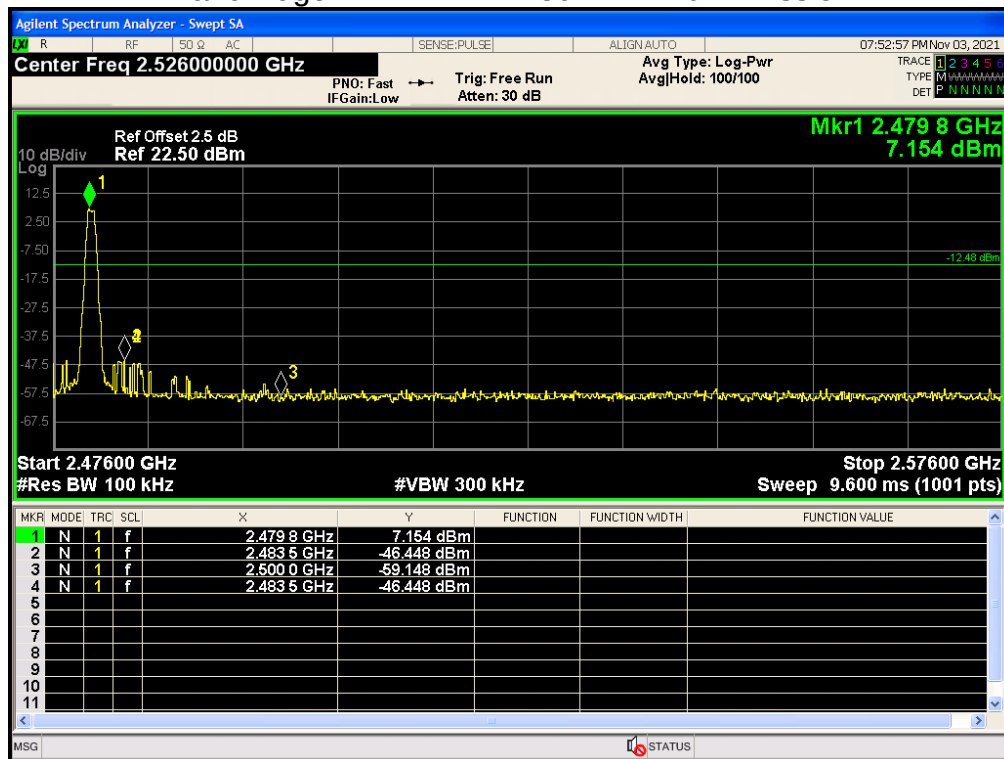


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-51.465	-20	Pass
NVNT	BLE	2442	Ant 1	-49.564	-20	Pass
NVNT	BLE	2480	Ant 1	-50.82	-20	Pass


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

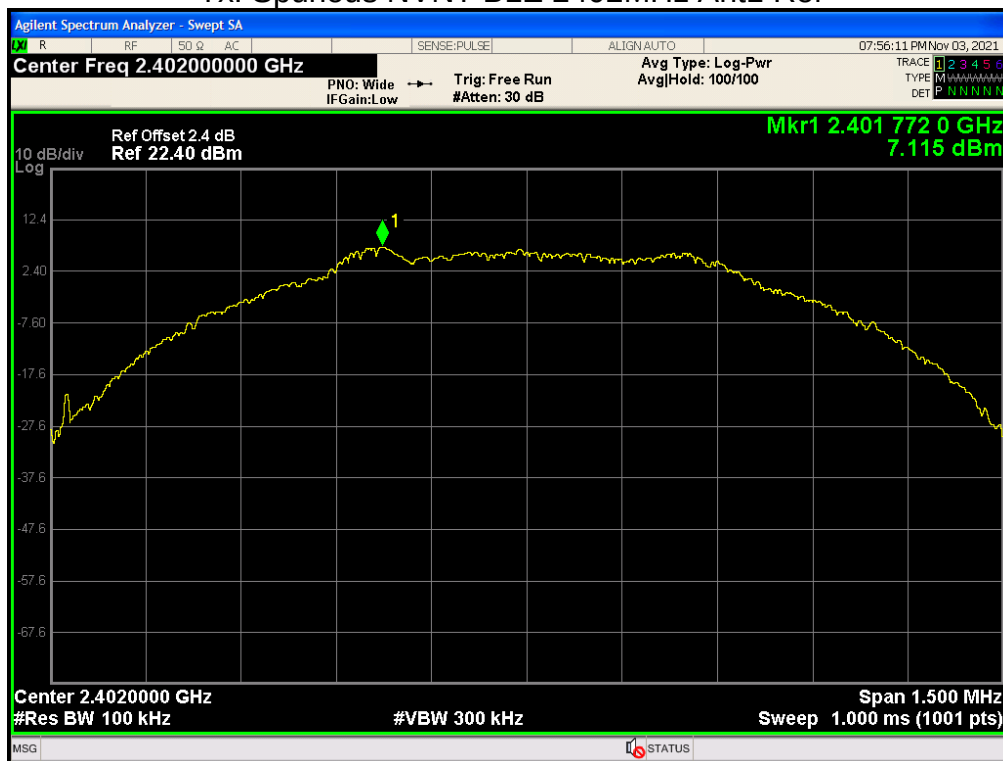


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

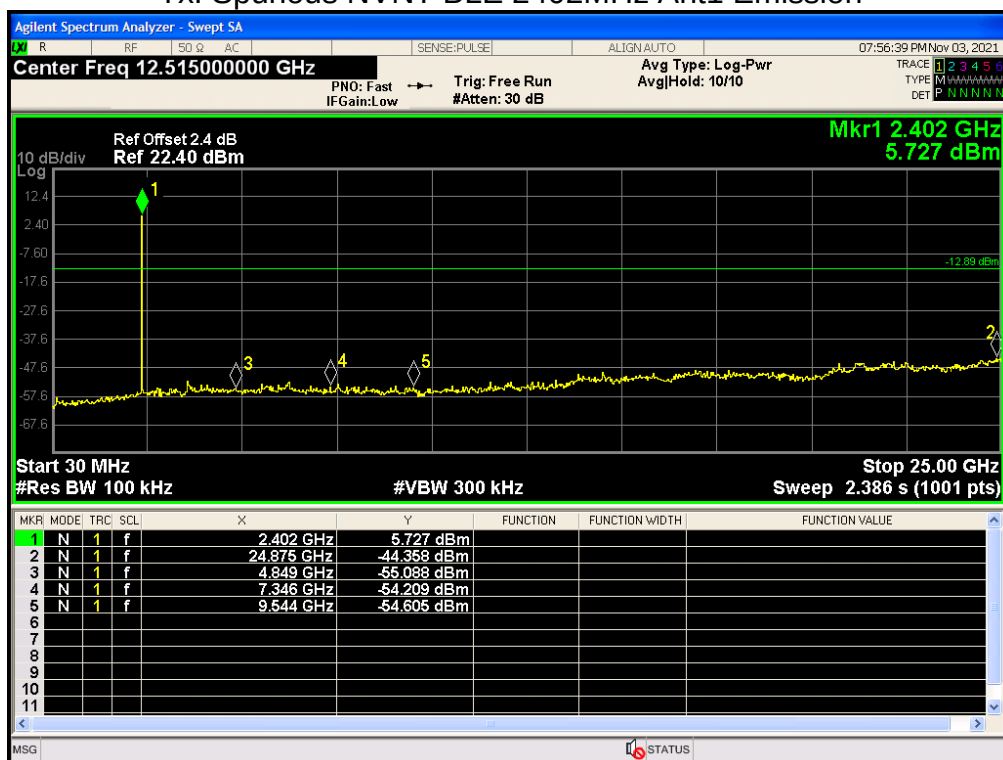


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

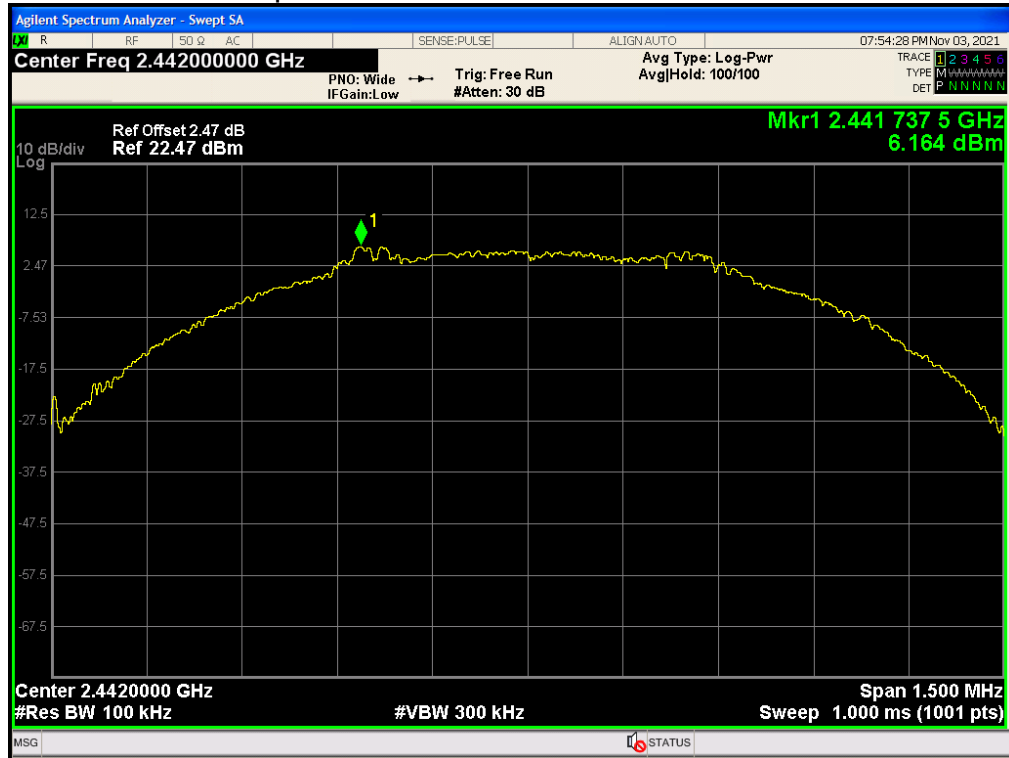


Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

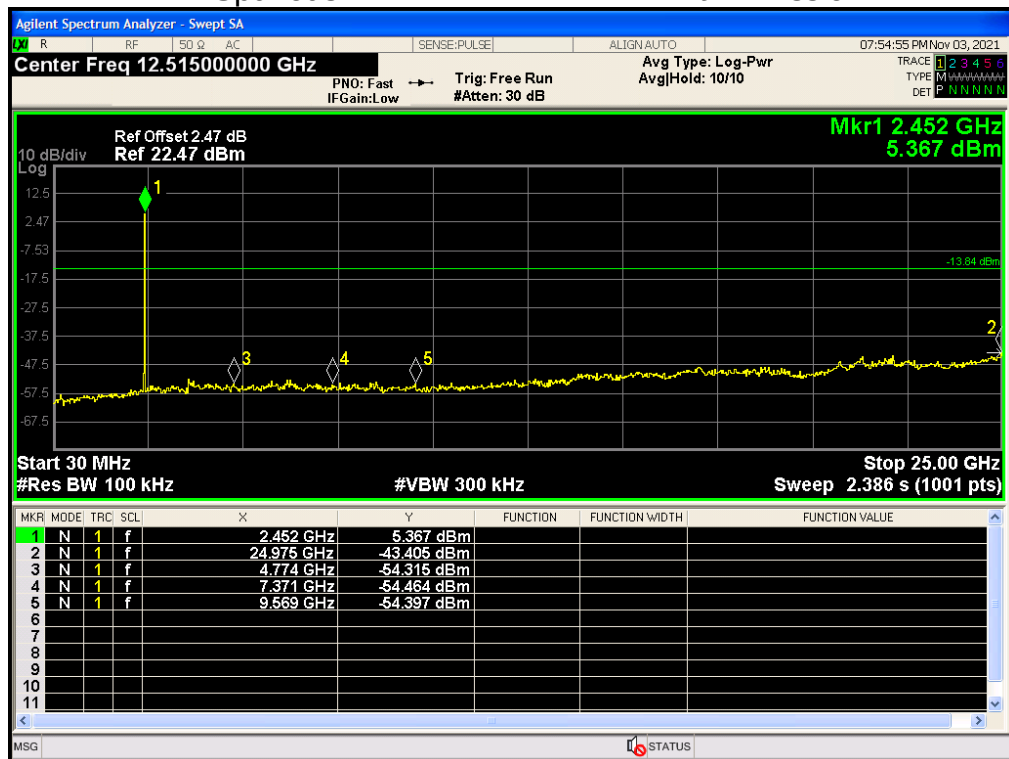

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

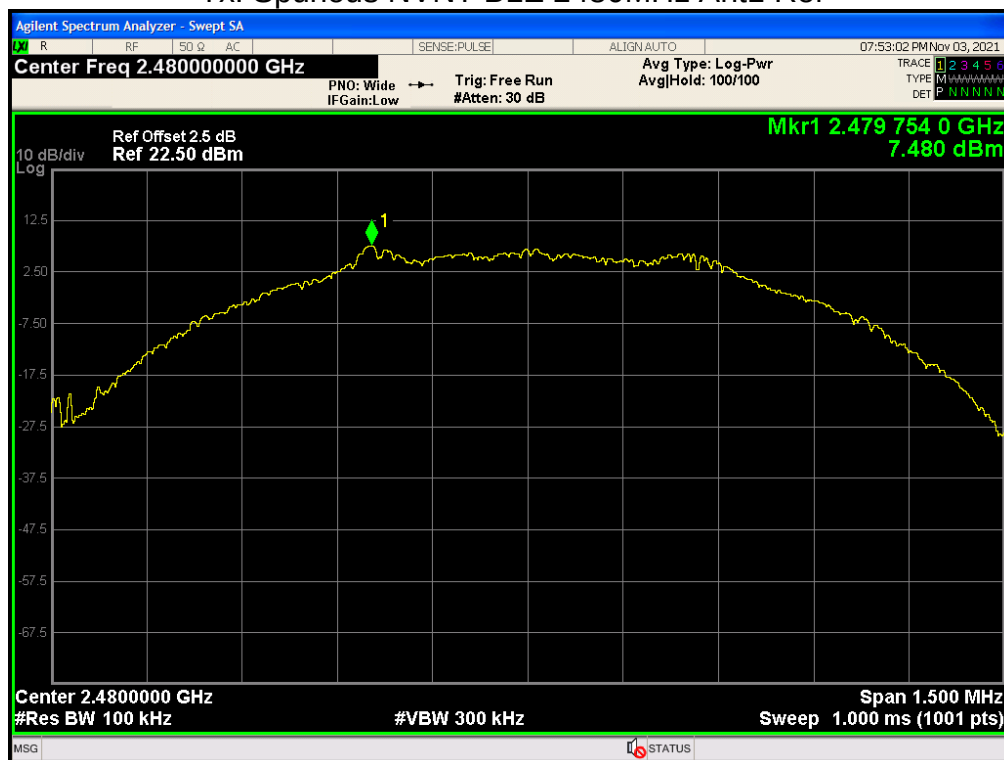

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

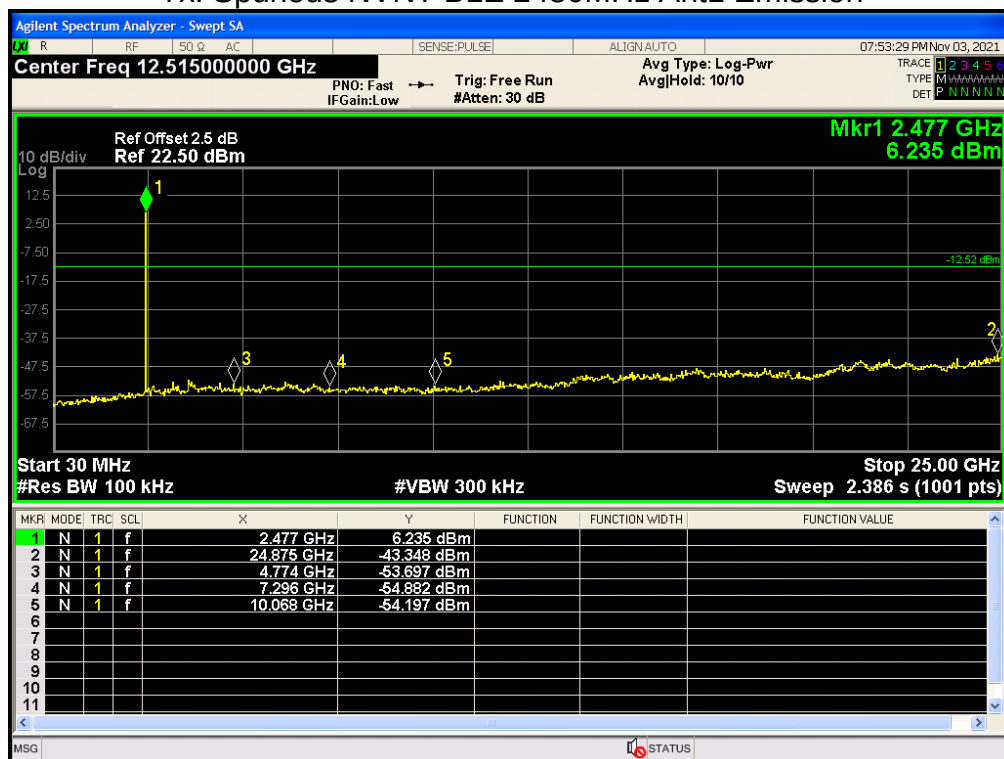


Appendix A – BLE-Coded PHY,S=8


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-51.465	-20	Pass
NVNT	BLE	2442	Ant 1	-49.564	-20	Pass
NVNT	BLE	2480	Ant 1	-50.82	-20	Pass


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

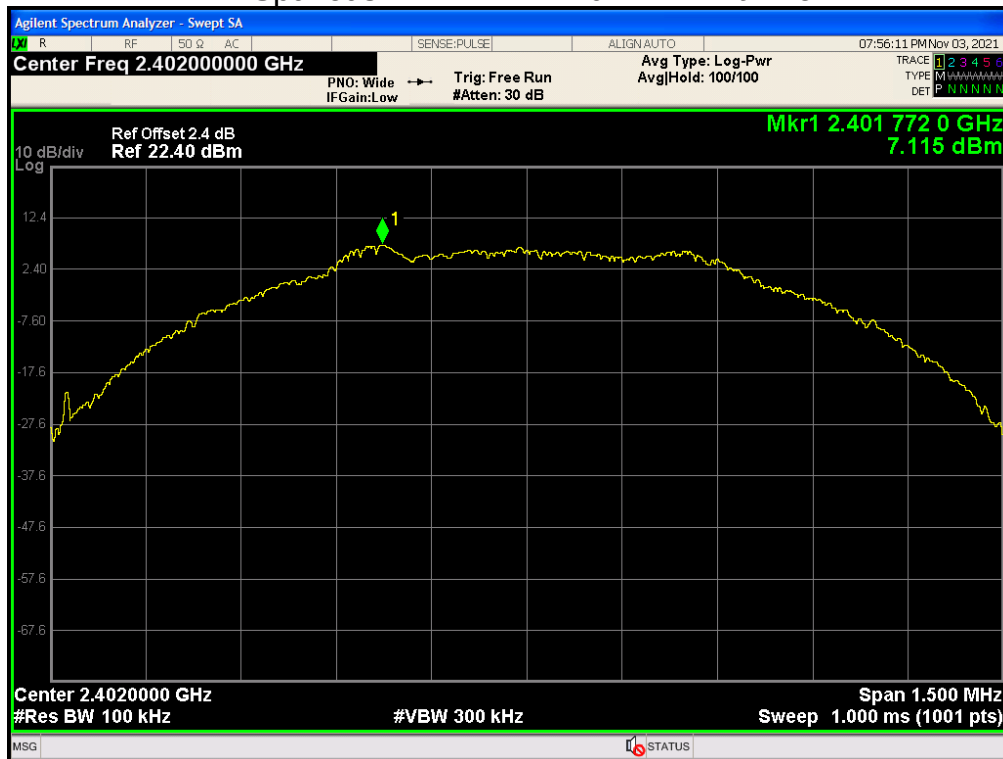


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

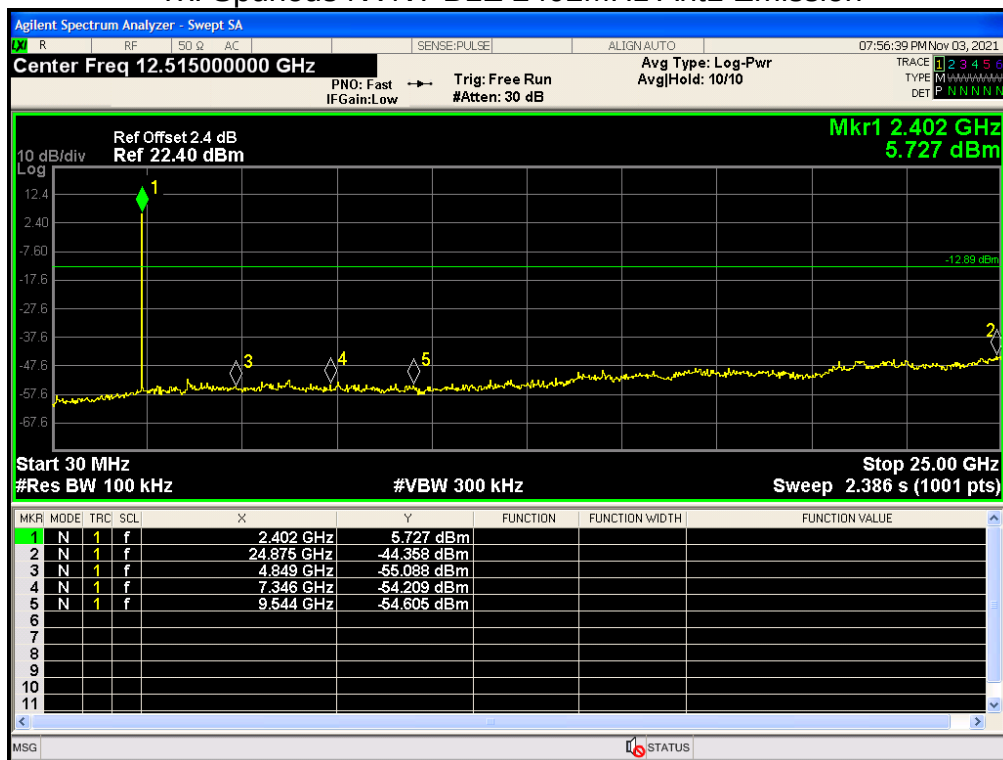


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

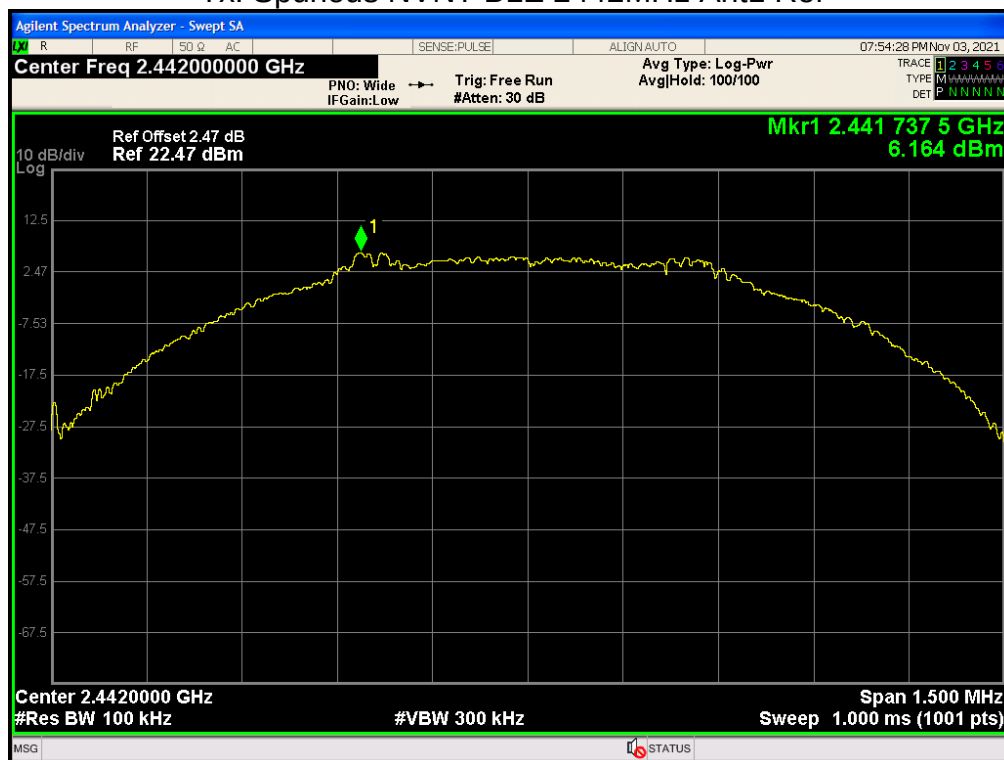


Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

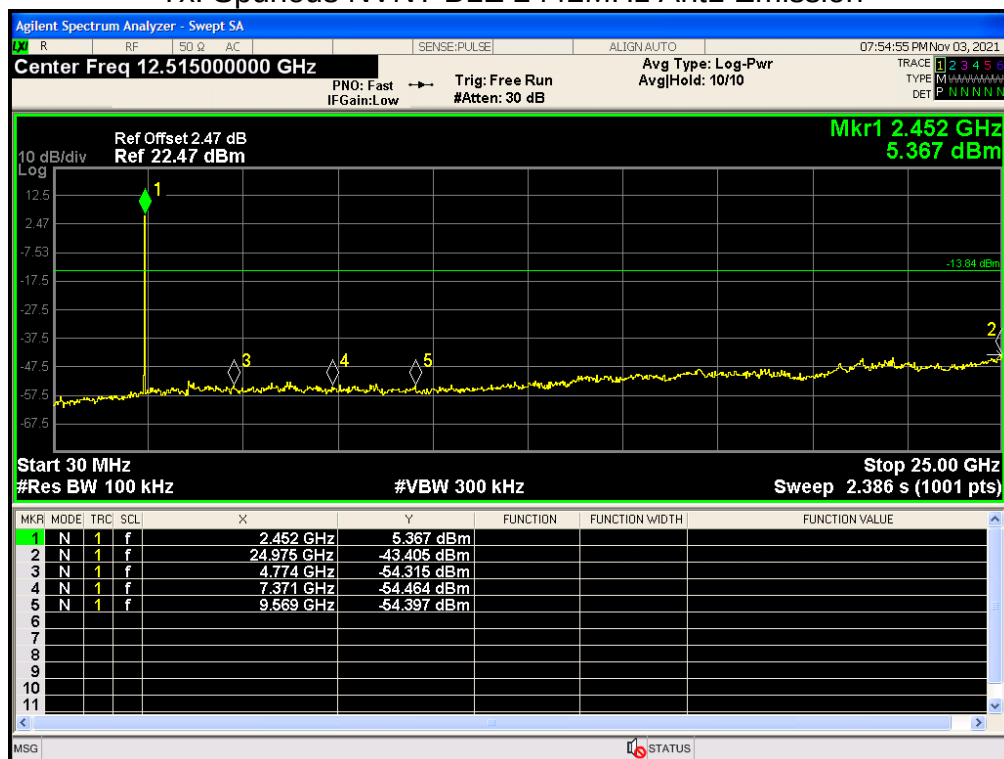

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

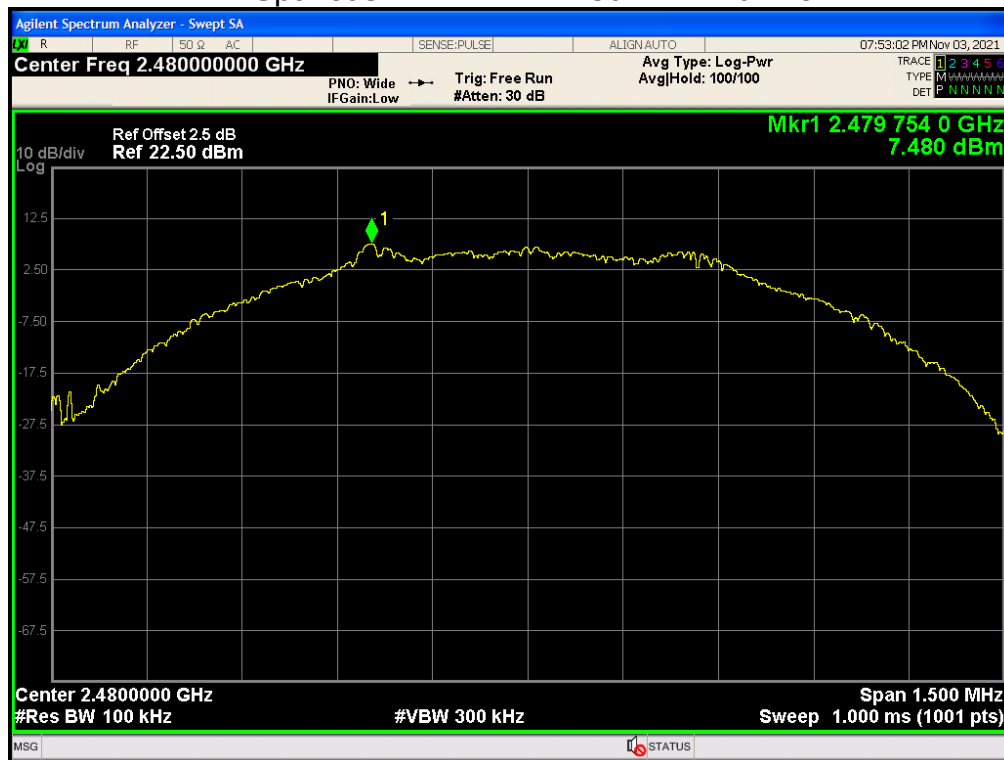


Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

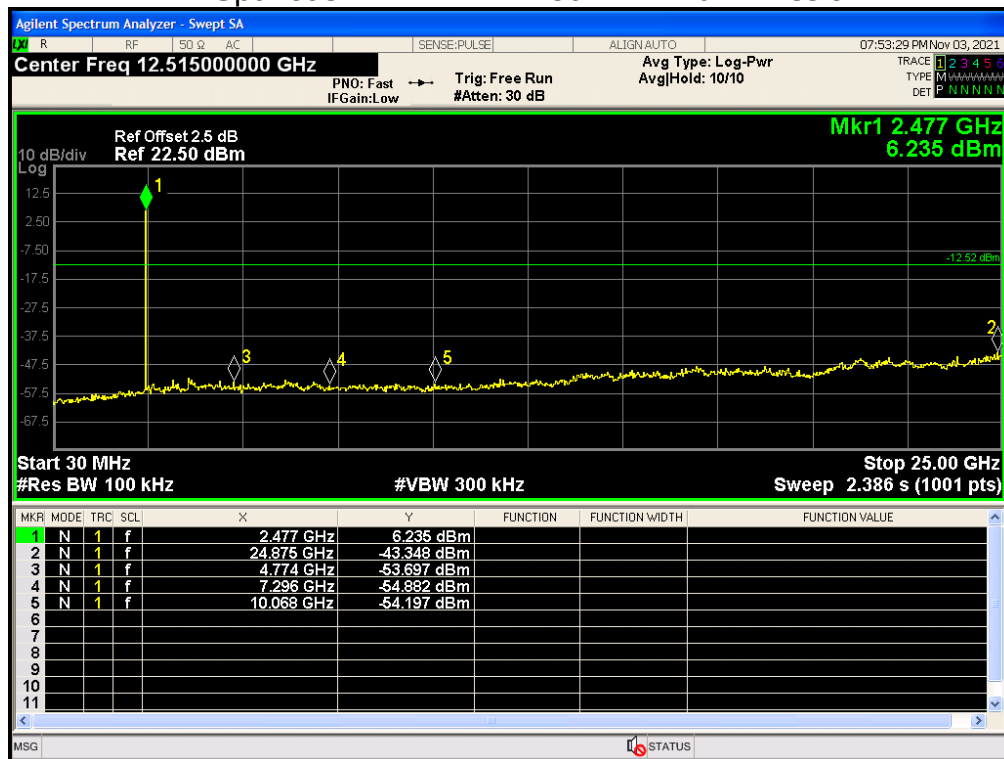


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	8.369	0	8.369	30	Pass
NVNT	BLE	2442	Ant 1	7.639	0	7.639	30	Pass
NVNT	BLE	2480	Ant 1	8.524	0	8.524	30	Pass


Power NVNT BLE 2402MHz Ant1

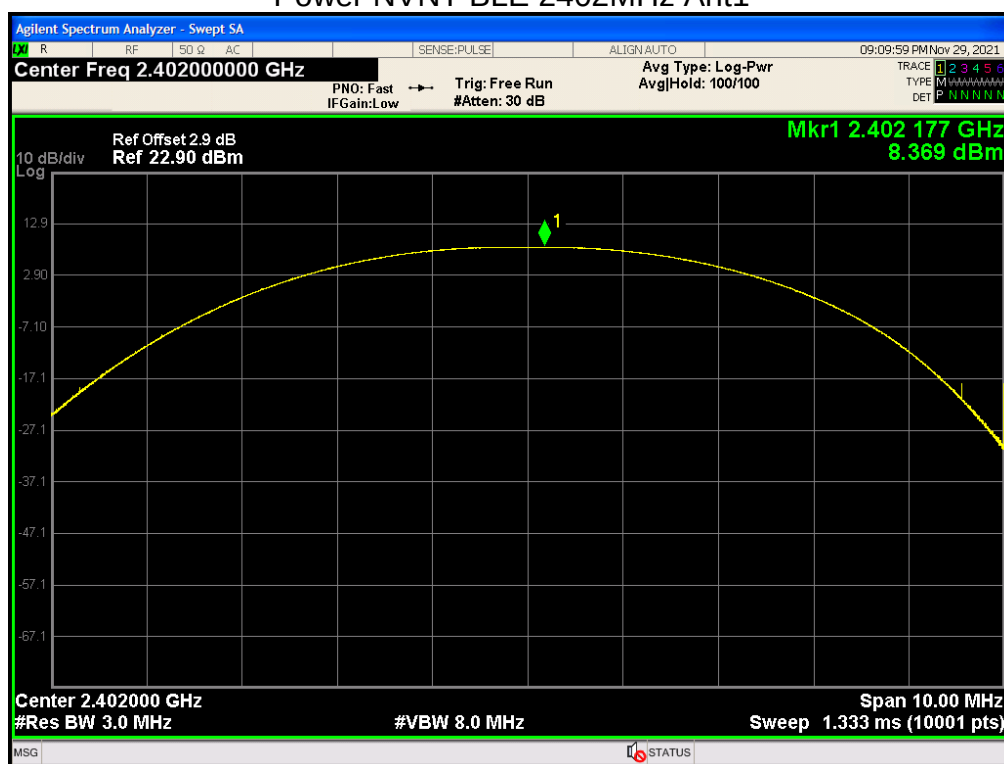

Power NVNT BLE 2442MHz Ant1

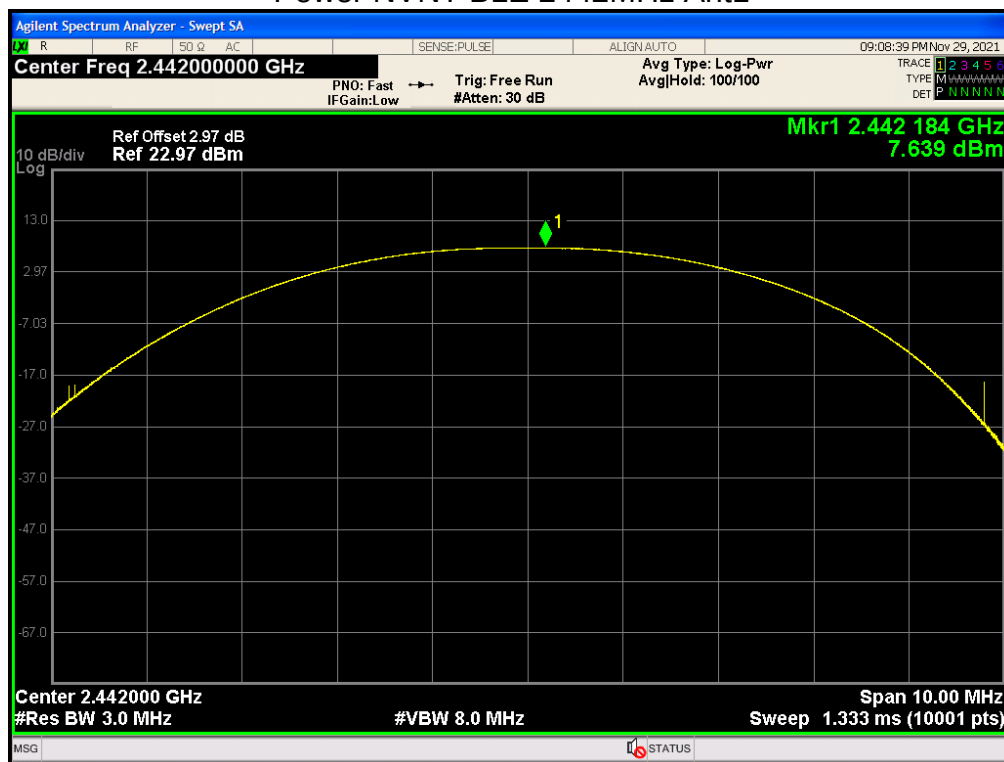


Power NVNT BLE 2480MHz Ant1

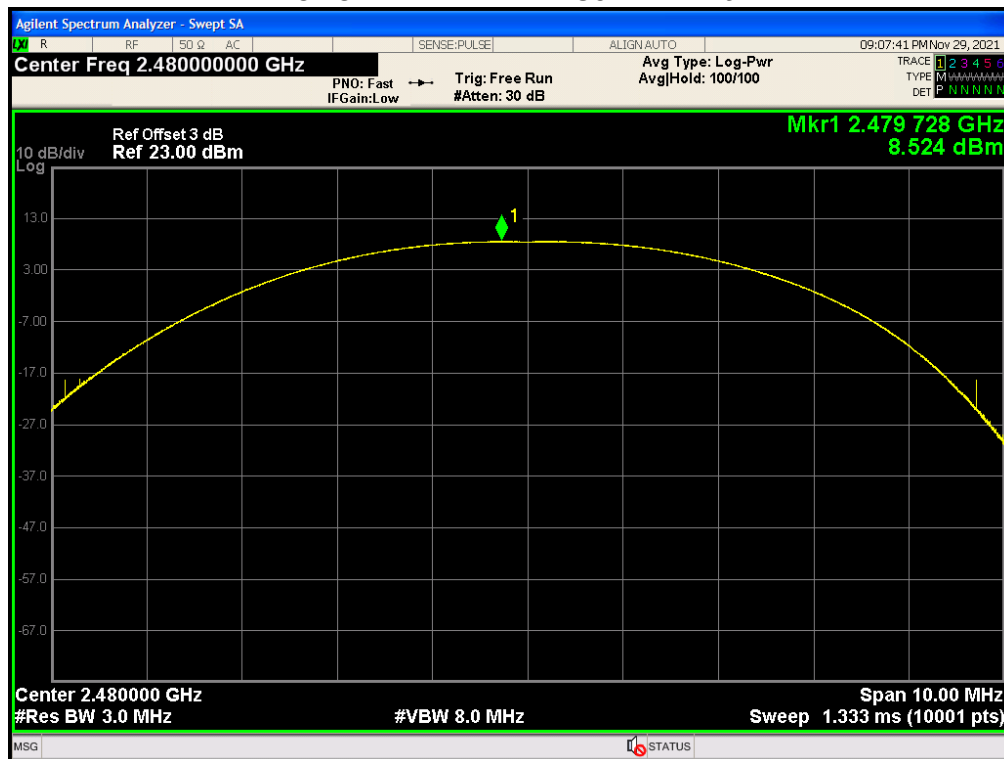


-6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	0.6818	0.5	Pass
NVNT	BLE	2442	Ant 1	0.6402	0.5	Pass
NVNT	BLE	2480	Ant 1	0.6838	0.5	Pass


OBW NVNT BLE 2402MHz Ant1

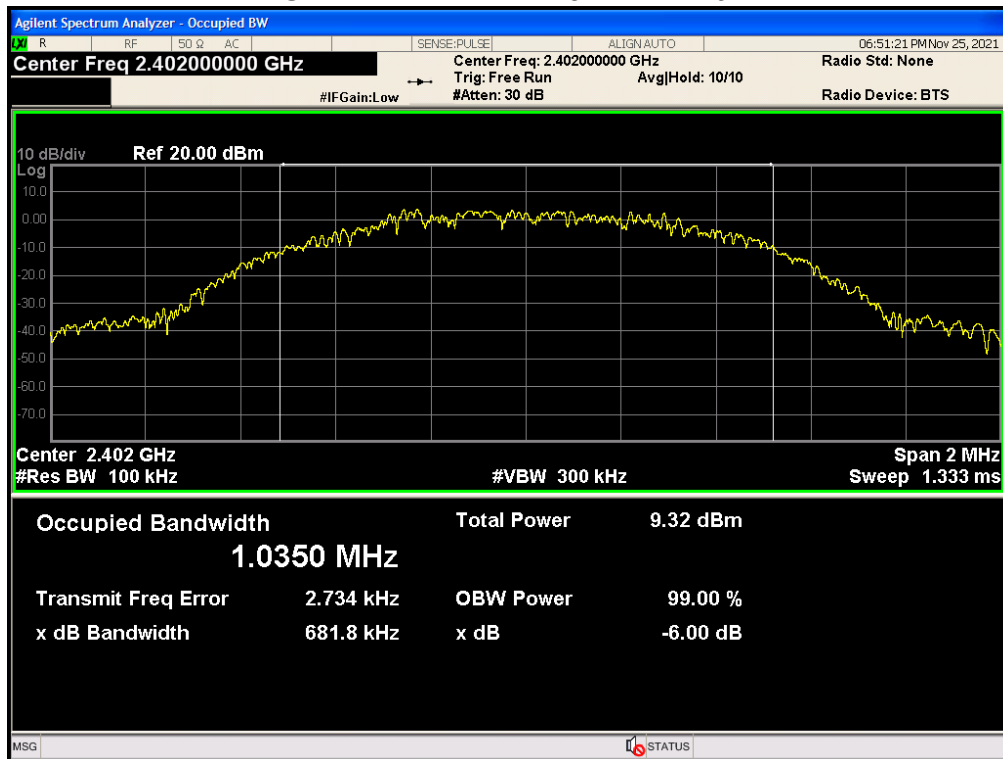

OBW NVNT BLE 2442MHz Ant1

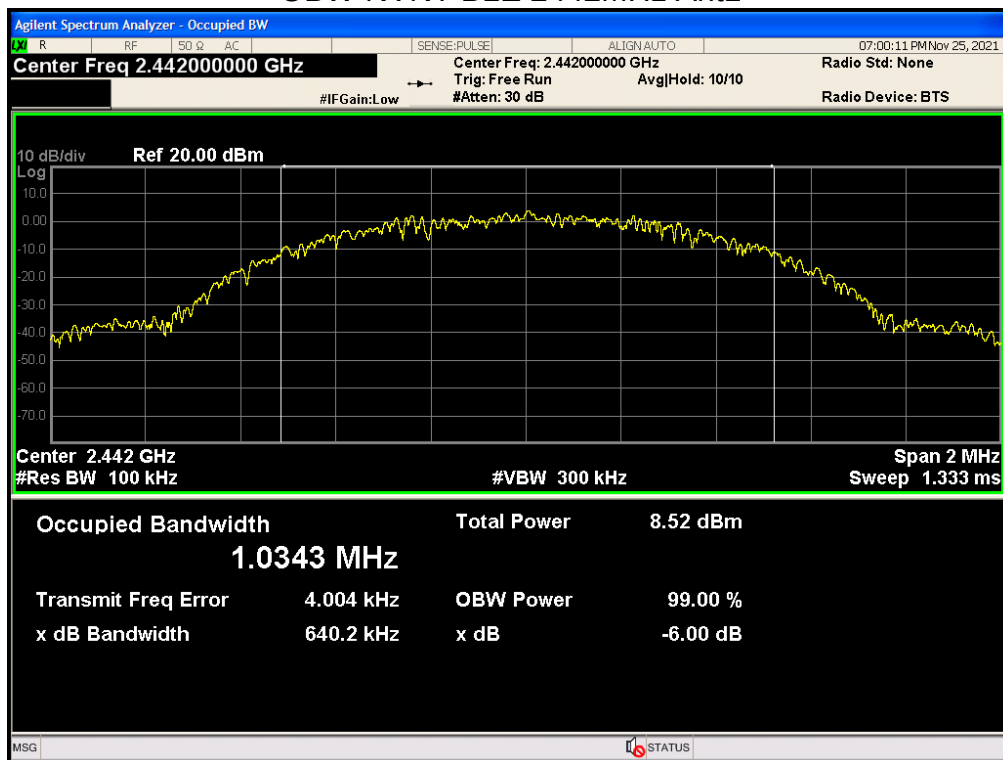


OBW NVNT BLE 2480MHz Ant1

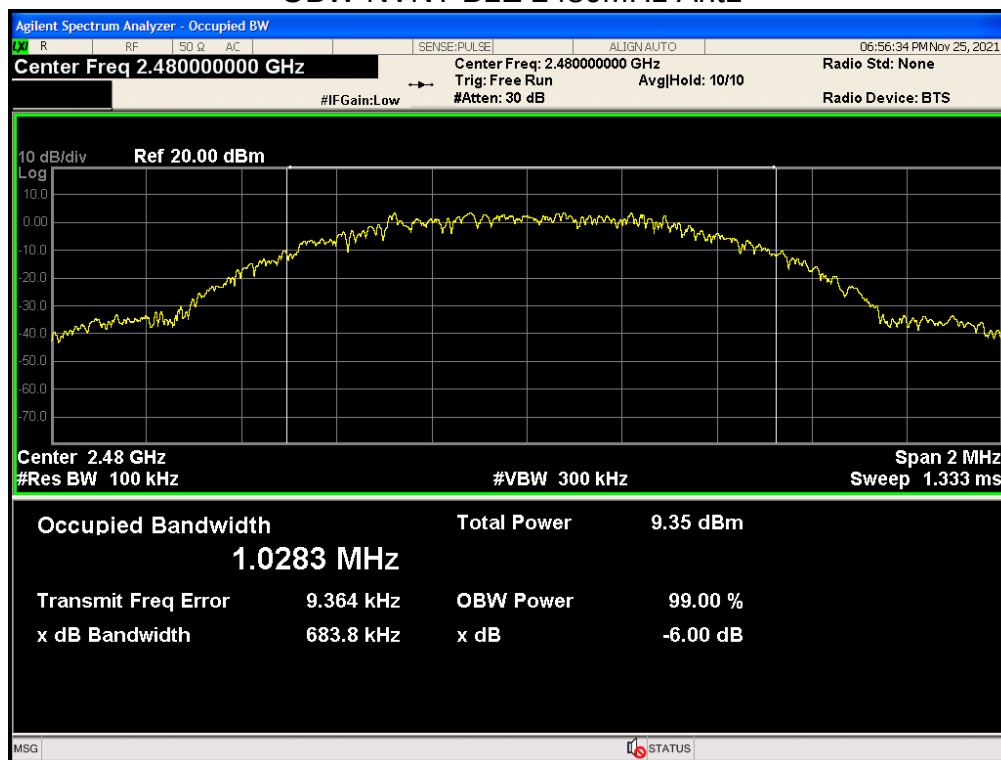


99% Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant 1	1.0461
NVNT	BLE	2442	Ant 1	1.0289
NVNT	BLE	2480	Ant 1	1.046


OBW NVNT BLE 2402MHz Ant1

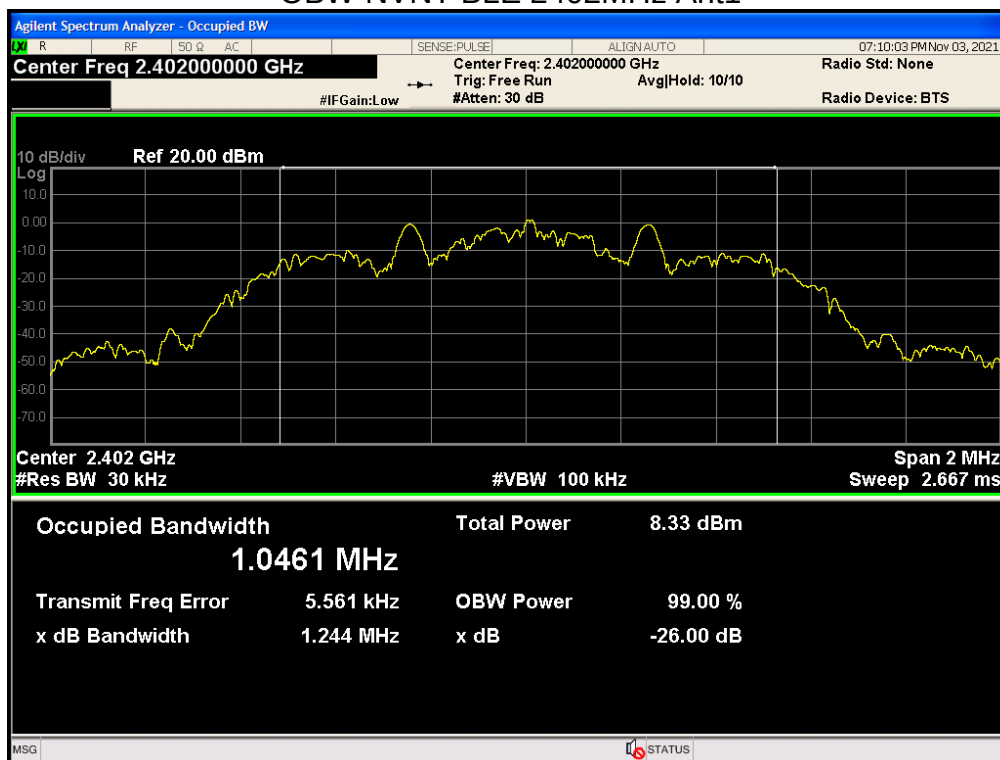

OBW NVNT BLE 2442MHz Ant1

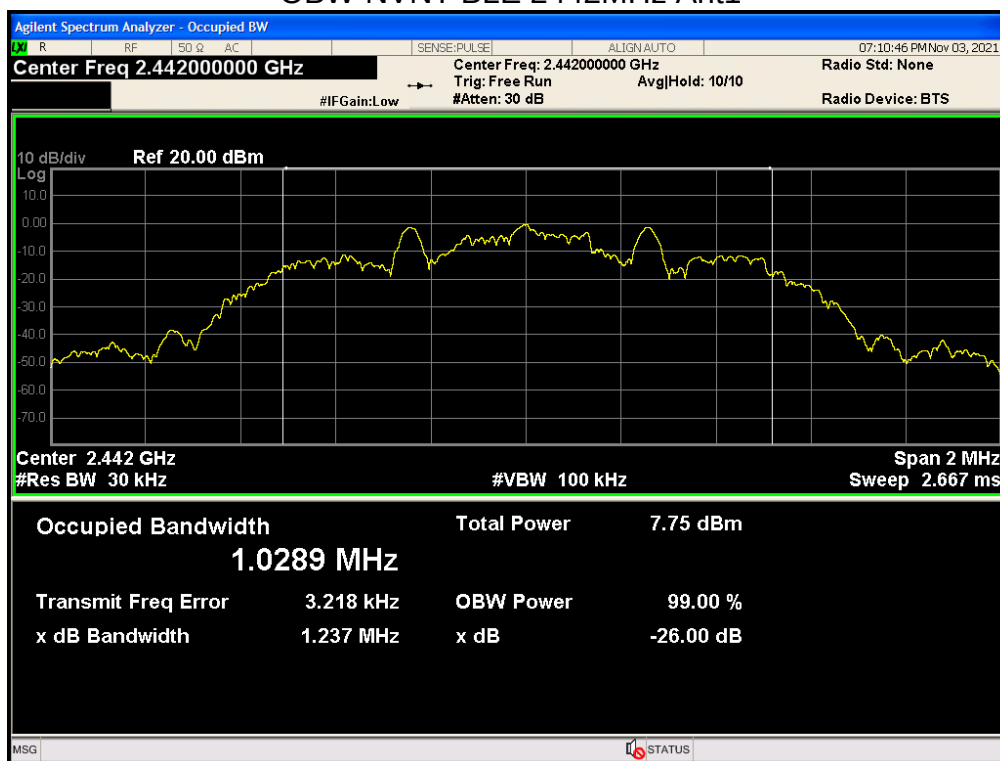


OBW NVNT BLE 2480MHz Ant1

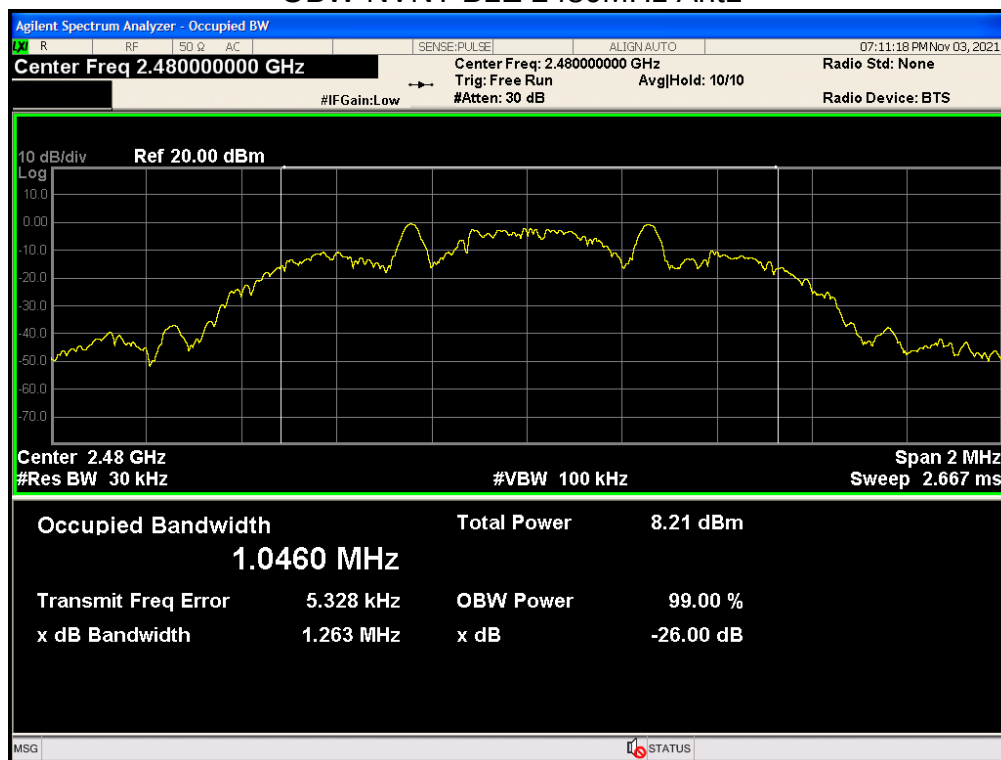


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	1.883	8	Pass
NVNT	BLE	2442	Ant 1	1.163	8	Pass
NVNT	BLE	2480	Ant 1	2.031	8	Pass


PSD NVNT BLE 2402MHz Ant1

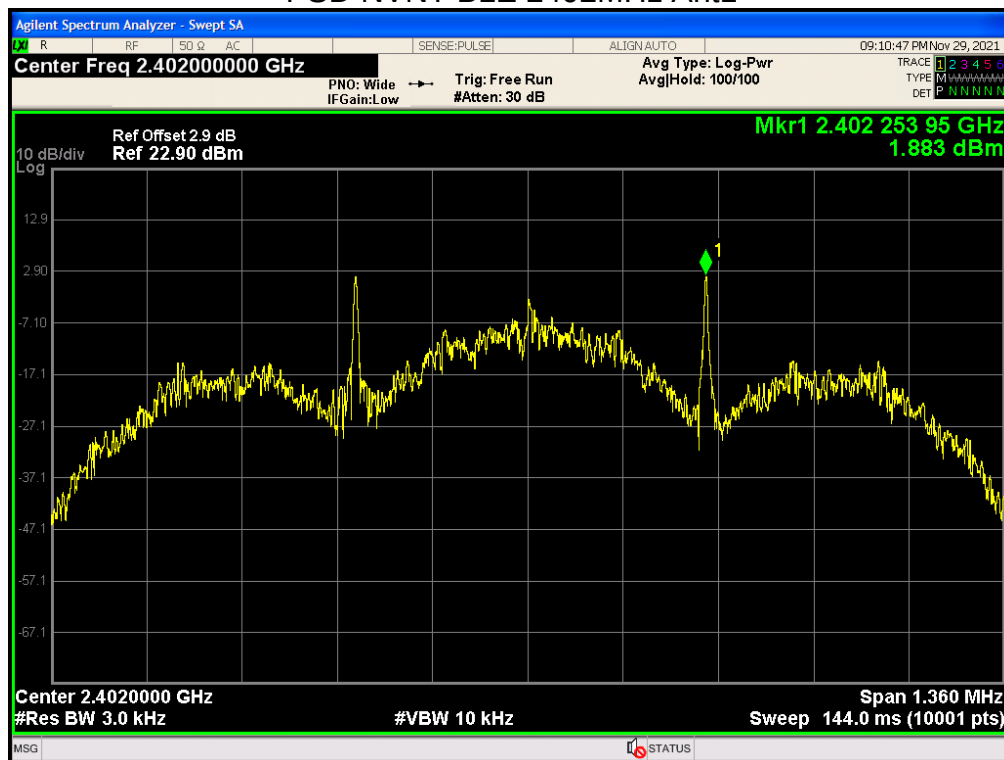

PSD NVNT BLE 2442MHz Ant1

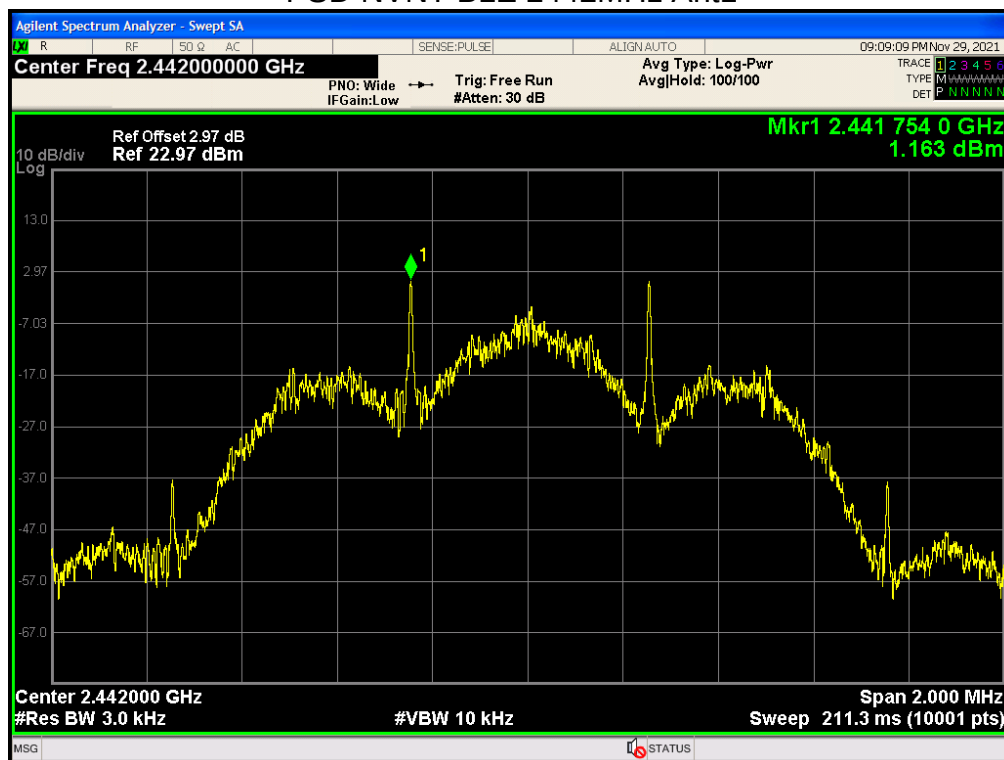


PSD NVNT BLE 2480MHz Ant1

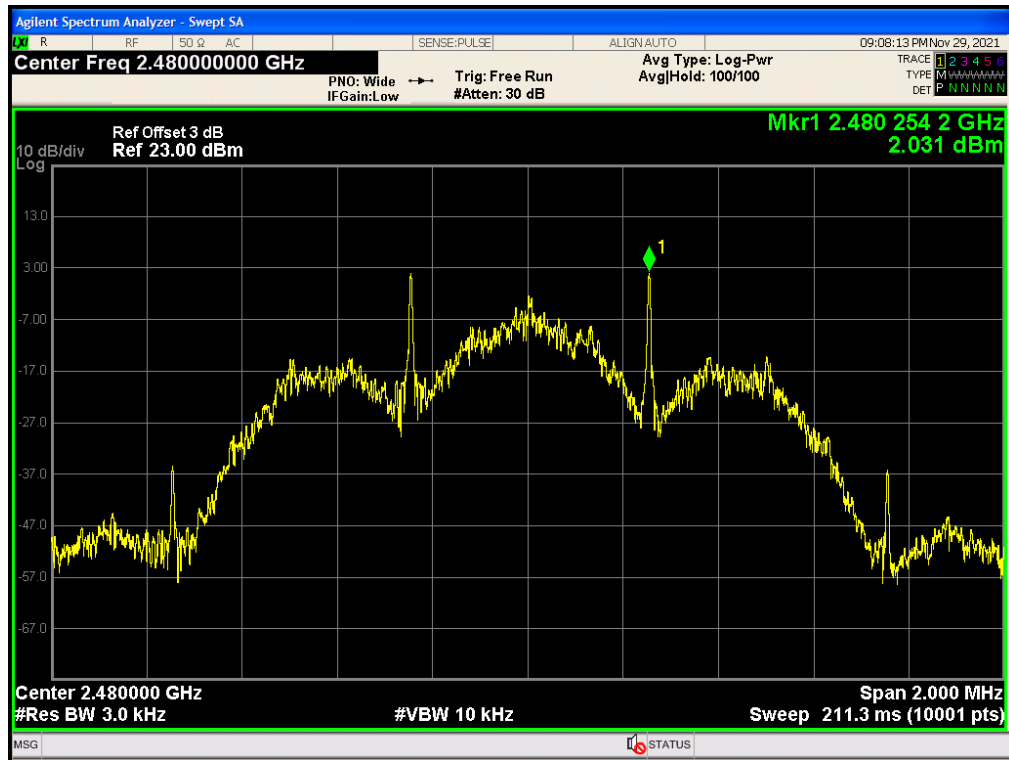


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-59.442	-20	Pass
NVNT	BLE	2480	Ant 1	-55.411	-20	Pass


Band Edge NVNT BLE 2402MHz Ant1 Ref

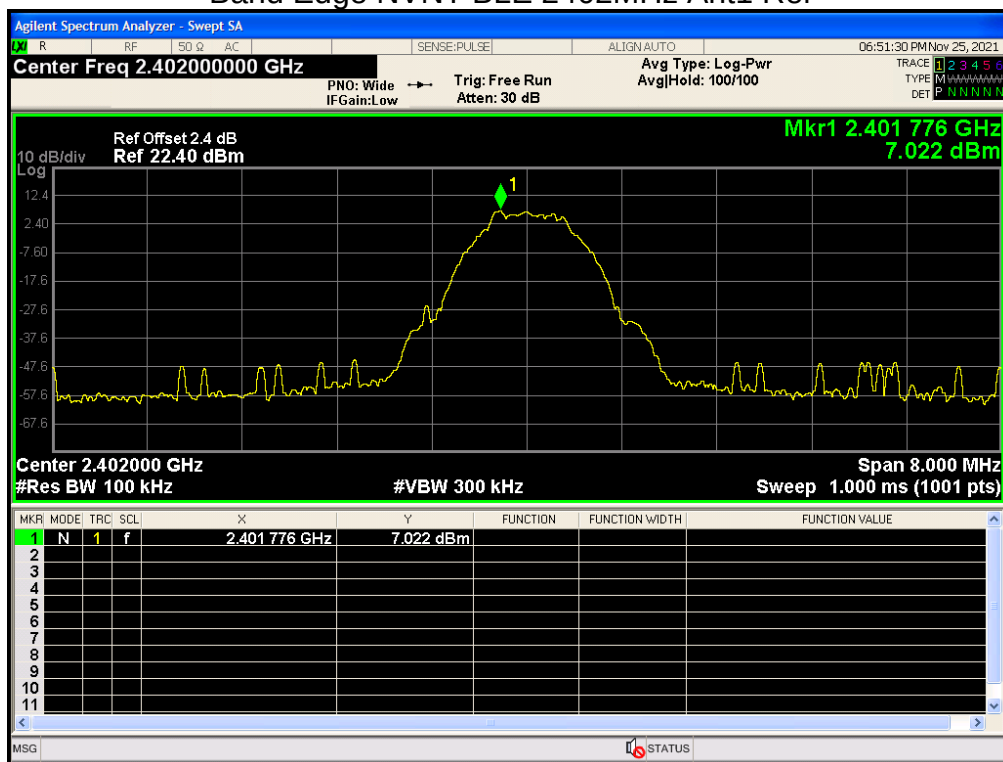


Band Edge NVNT BLE 2402MHz Ant1 Emission

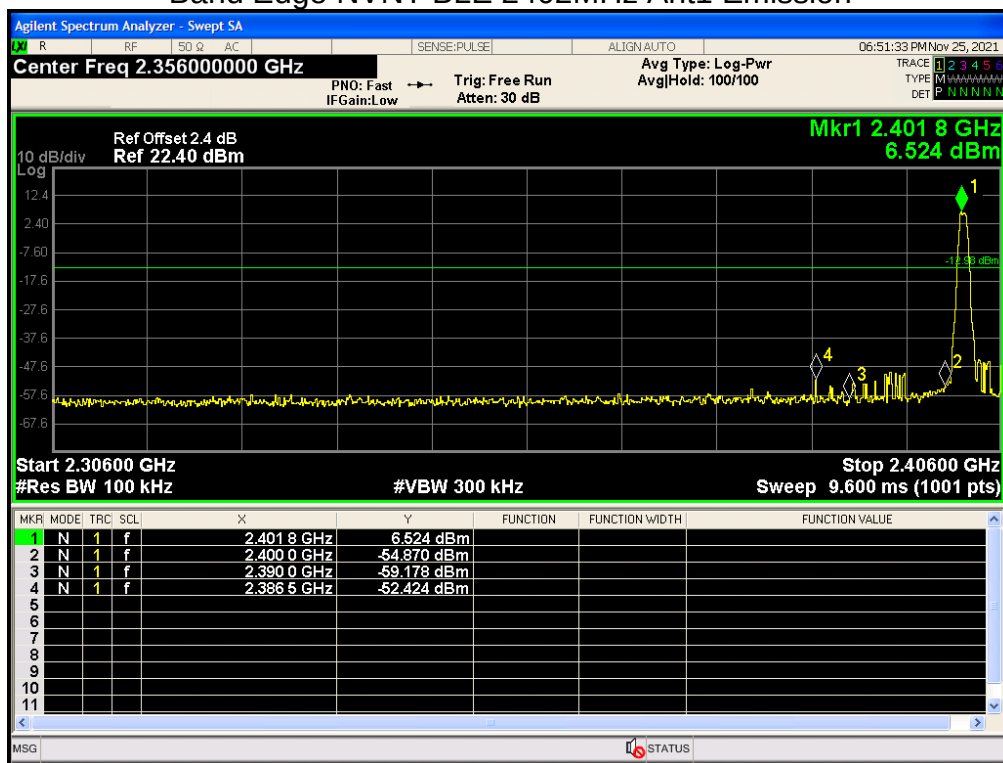

Band Edge NVNT BLE 2480MHz Ant1 Ref

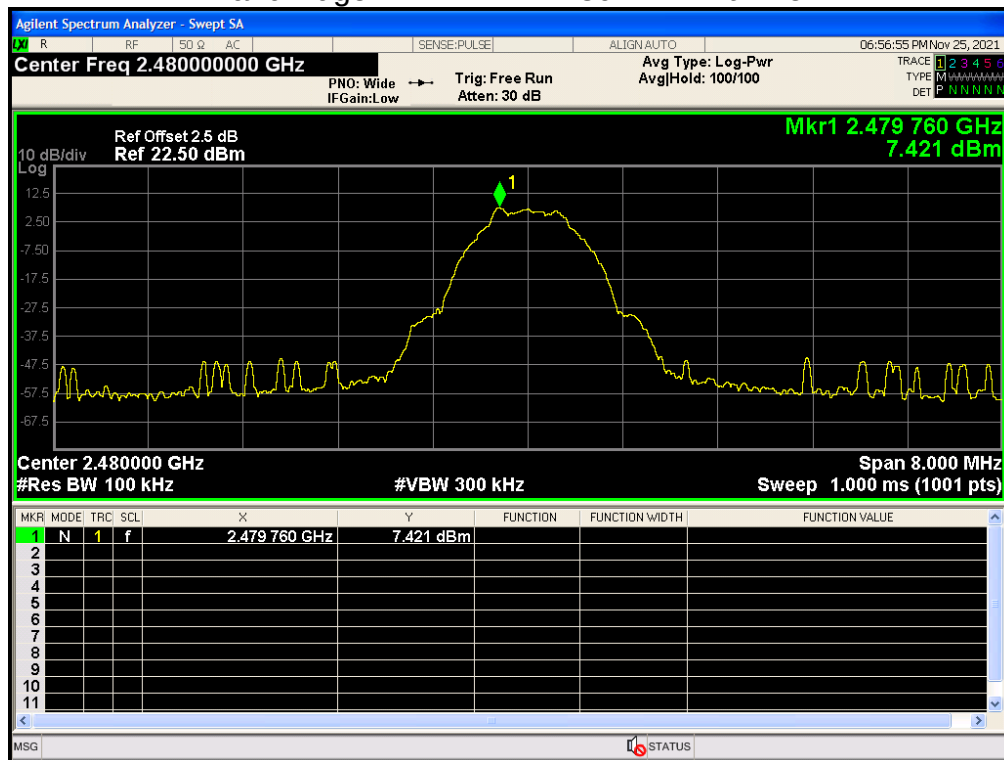


Band Edge NVNT BLE 2480MHz Ant1 Emission

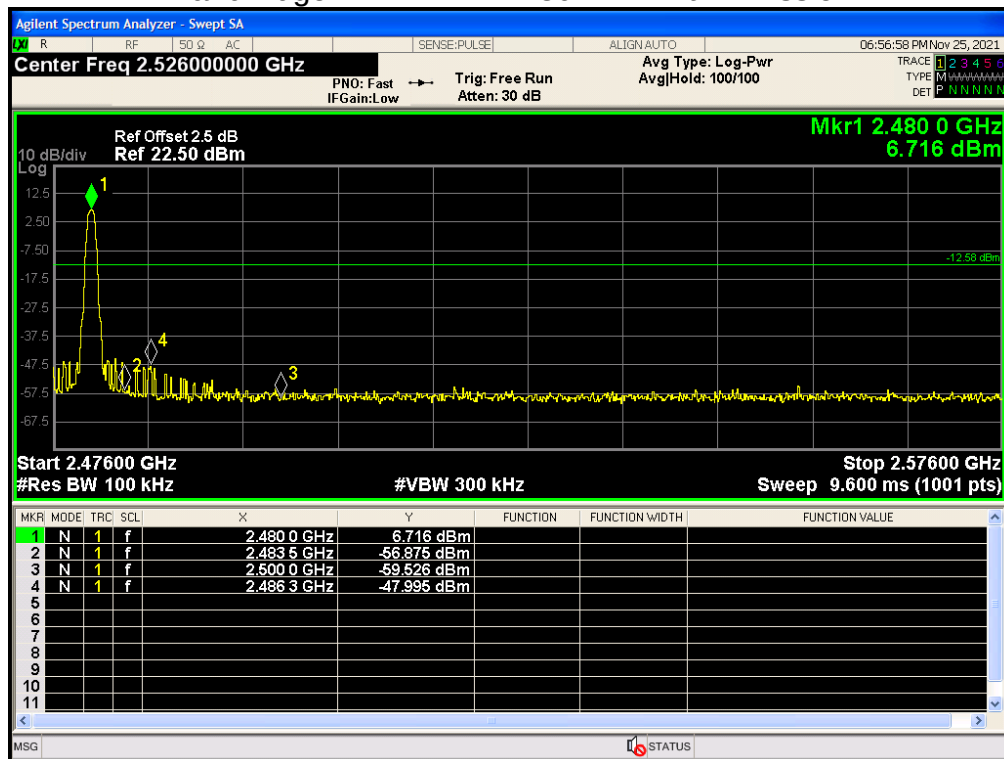


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-50.812	-20	Pass
NVNT	BLE	2442	Ant 1	-50.807	-20	Pass
NVNT	BLE	2480	Ant 1	-50.575	-20	Pass


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

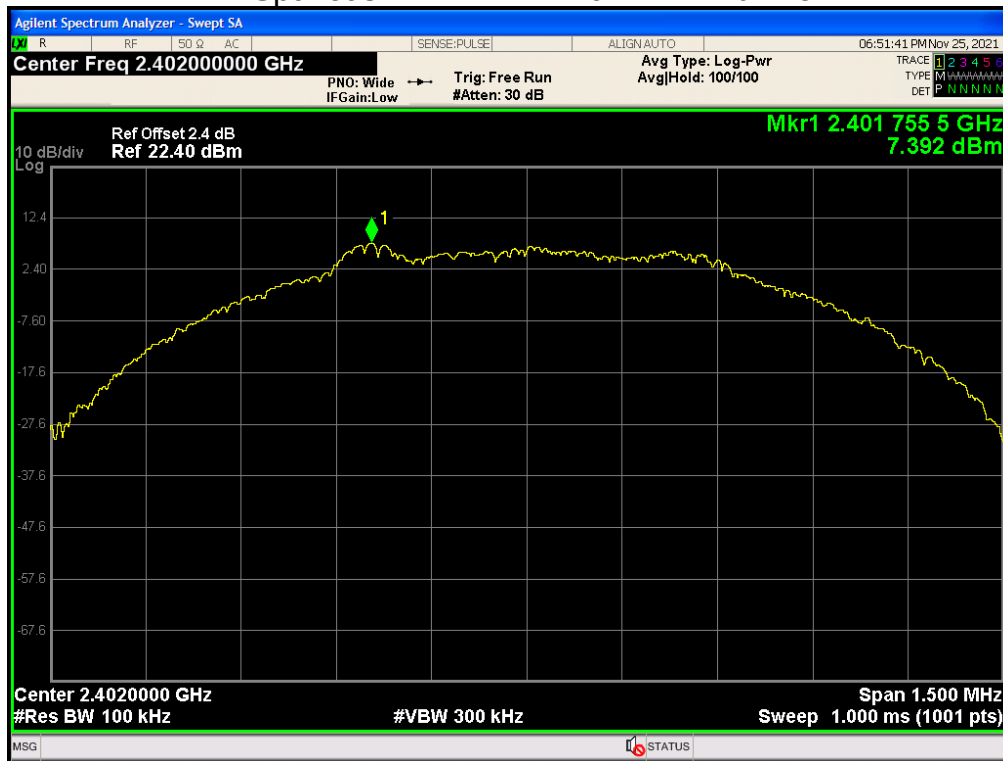


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

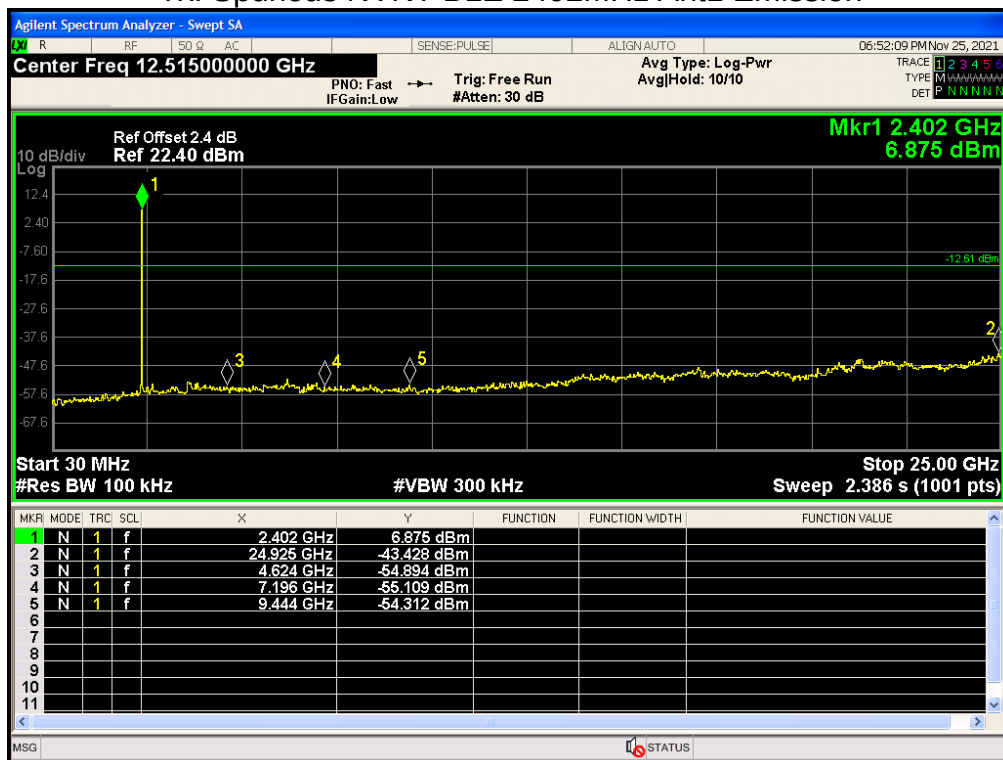


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

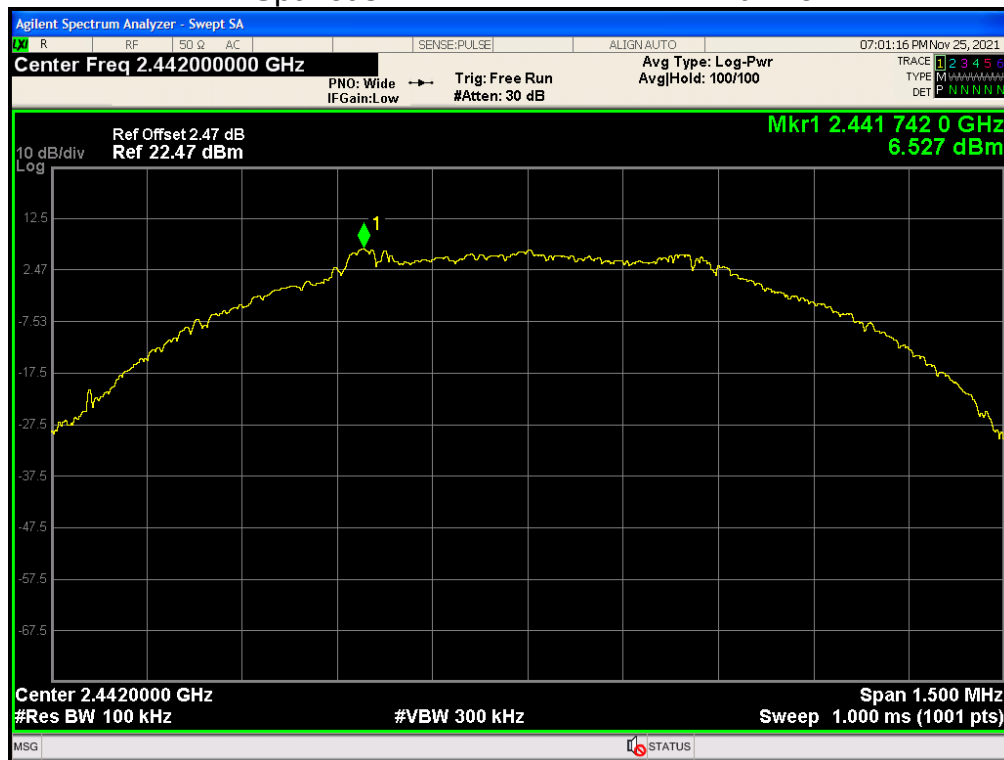


Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

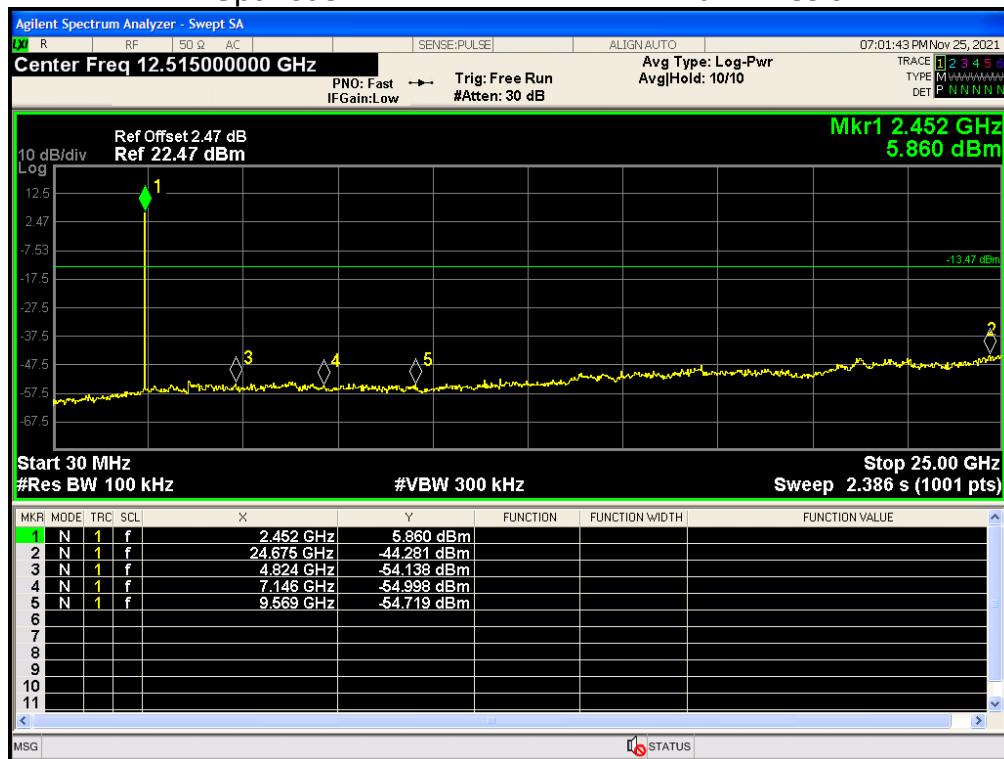

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

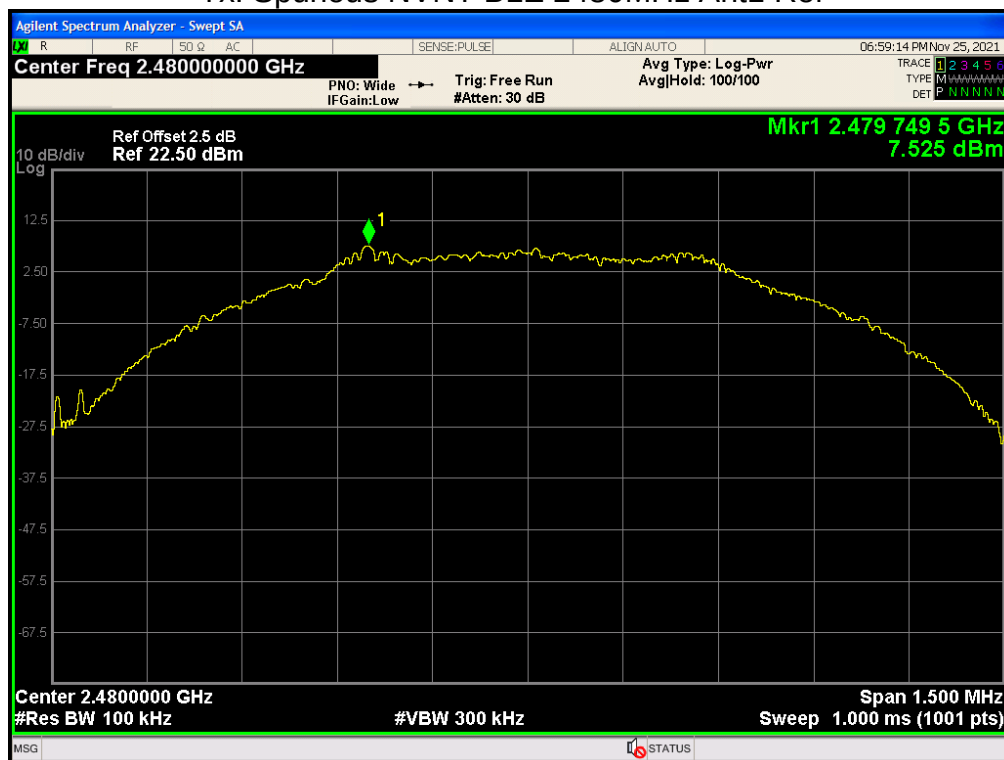

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

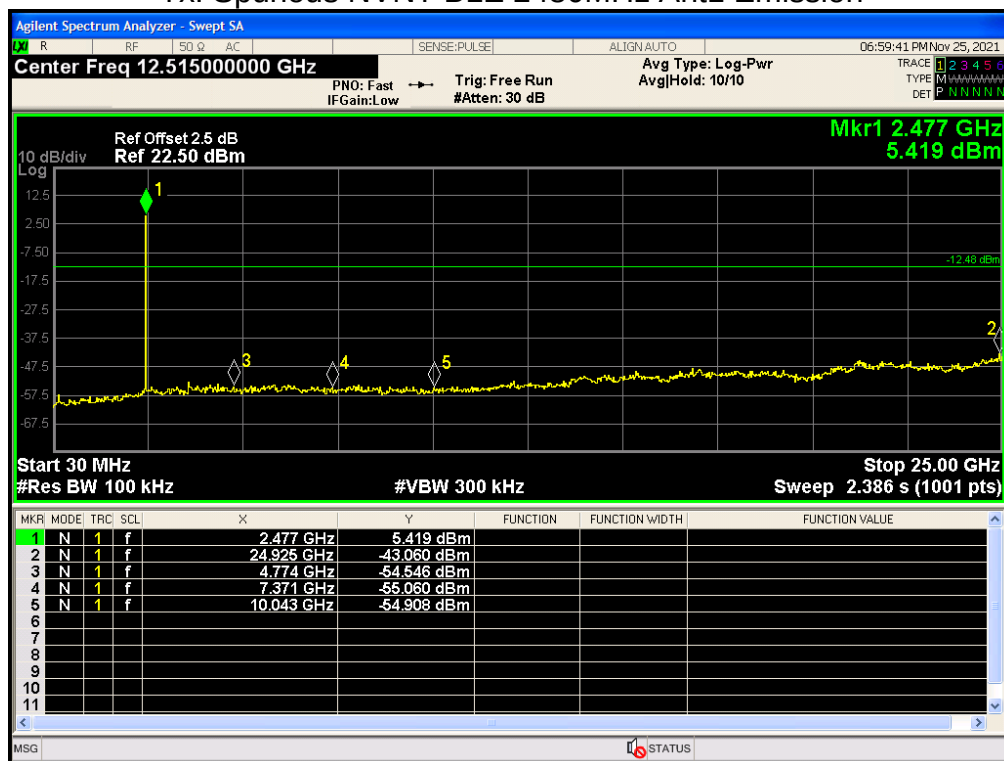

-----End of report-----