





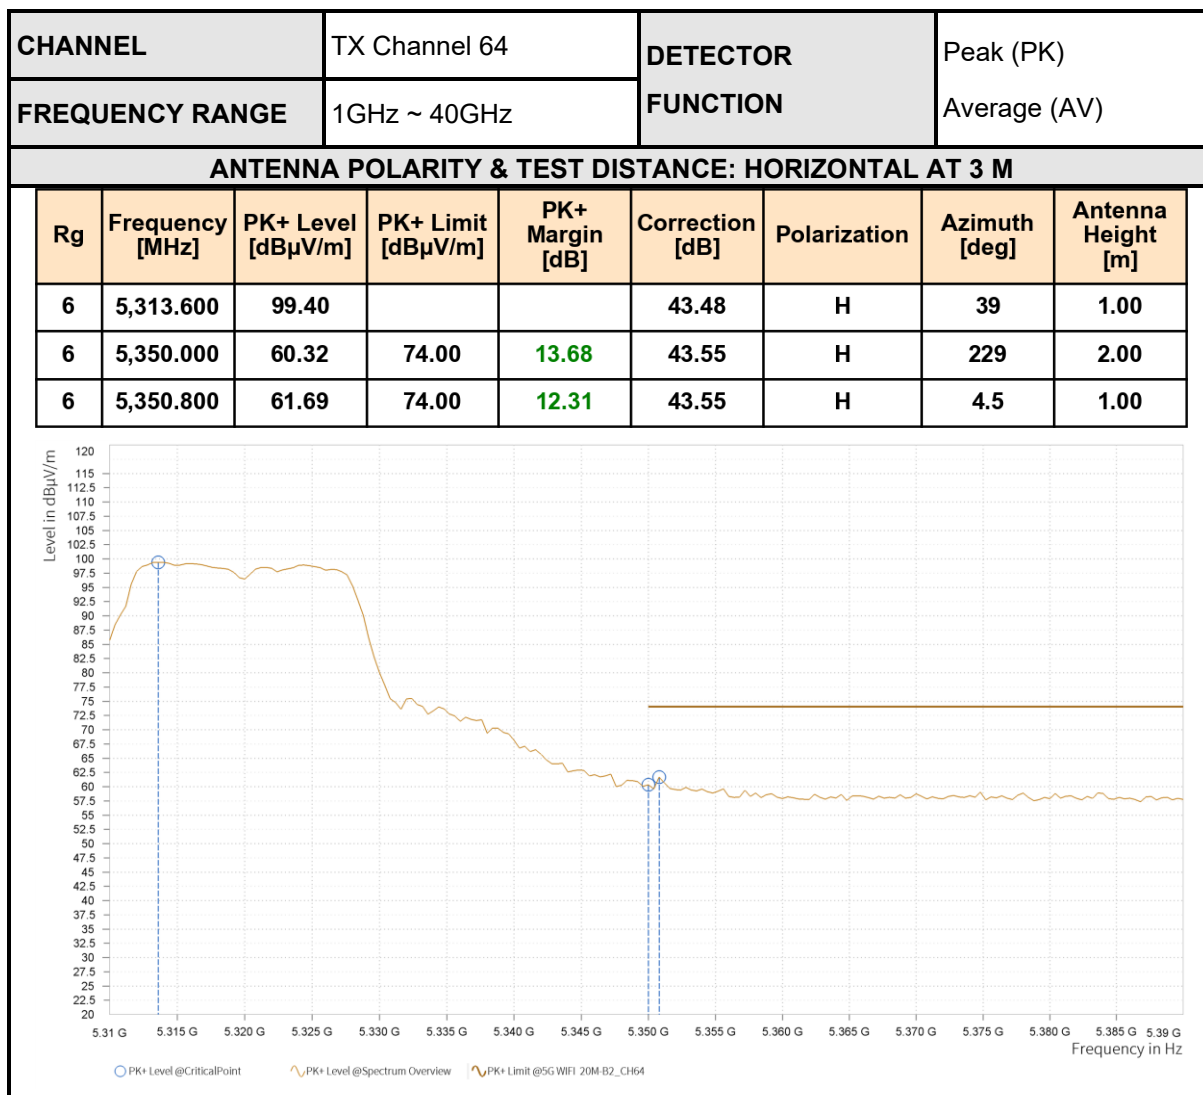

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,313.200	88.17			43.48	H	229	2.00
6	5,350.000	44.47	54.00	9.53	43.55	H	175.3	1.00
6	5,351.600	44.41	54.00	9.59	43.55	H	175.3	1.00

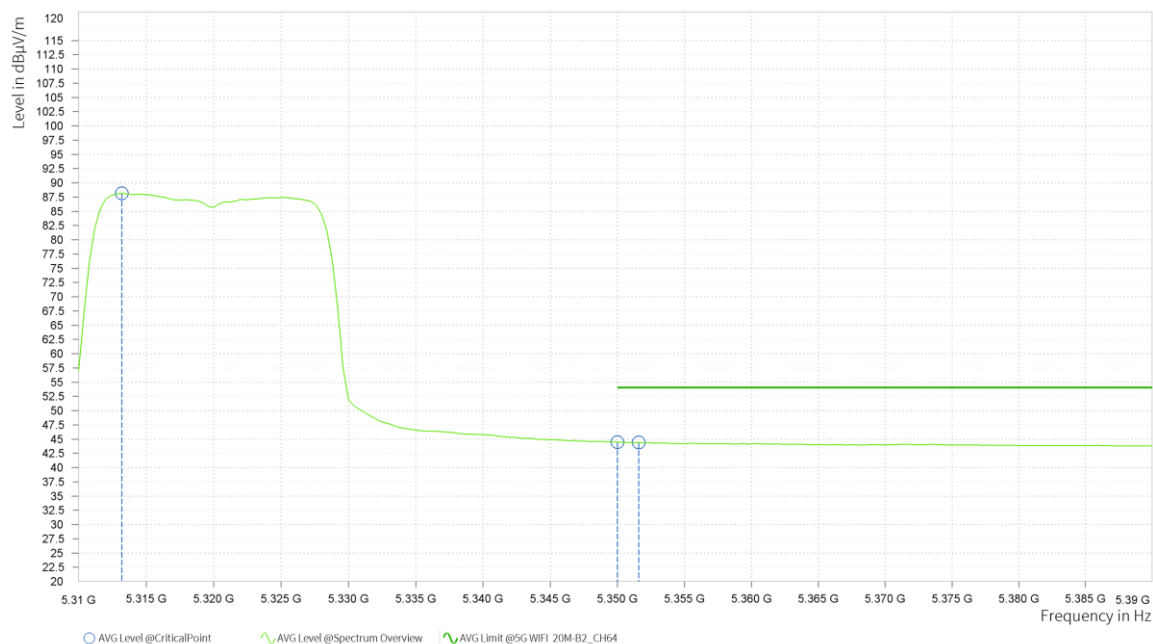



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,313.600	99.95			43.48	V	359	2.00
6	5,350.000	59.76	74.00	14.24	43.55	V	4.5	1.00
6	5,351.200	60.77	74.00	13.23	43.55	V	1	1.00

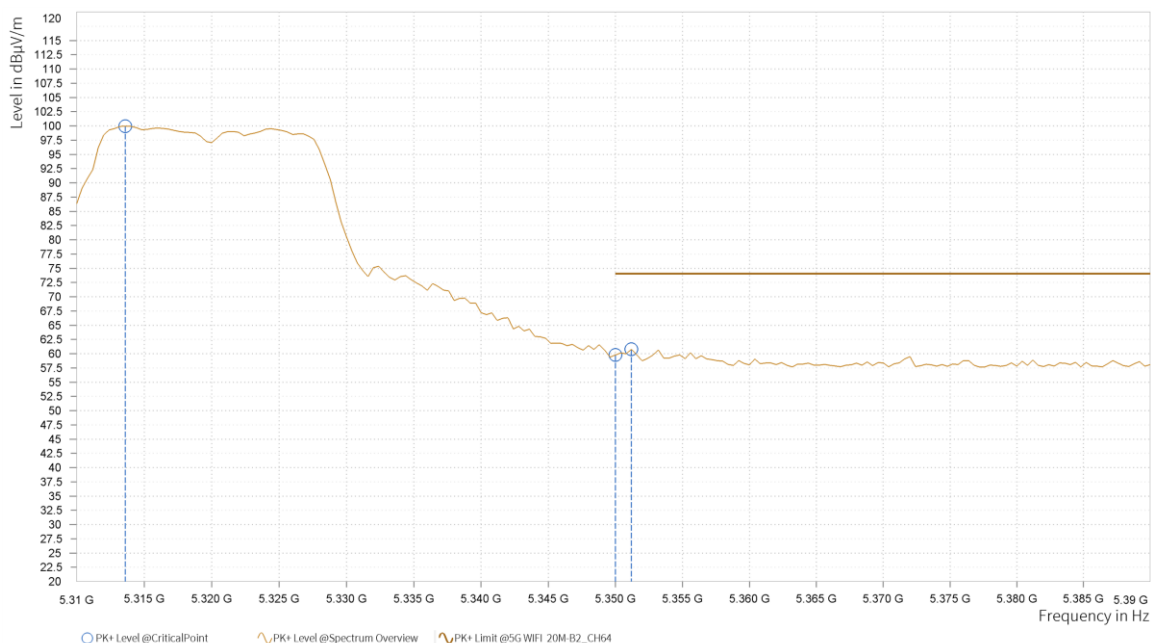



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,315.200	93.21			43.48	V	1	1.00
6	5,350.000	44.74	54.00	9.26	43.55	V	1	1.00
6	5,350.400	44.67	54.00	9.33	43.55	V	1	1.00

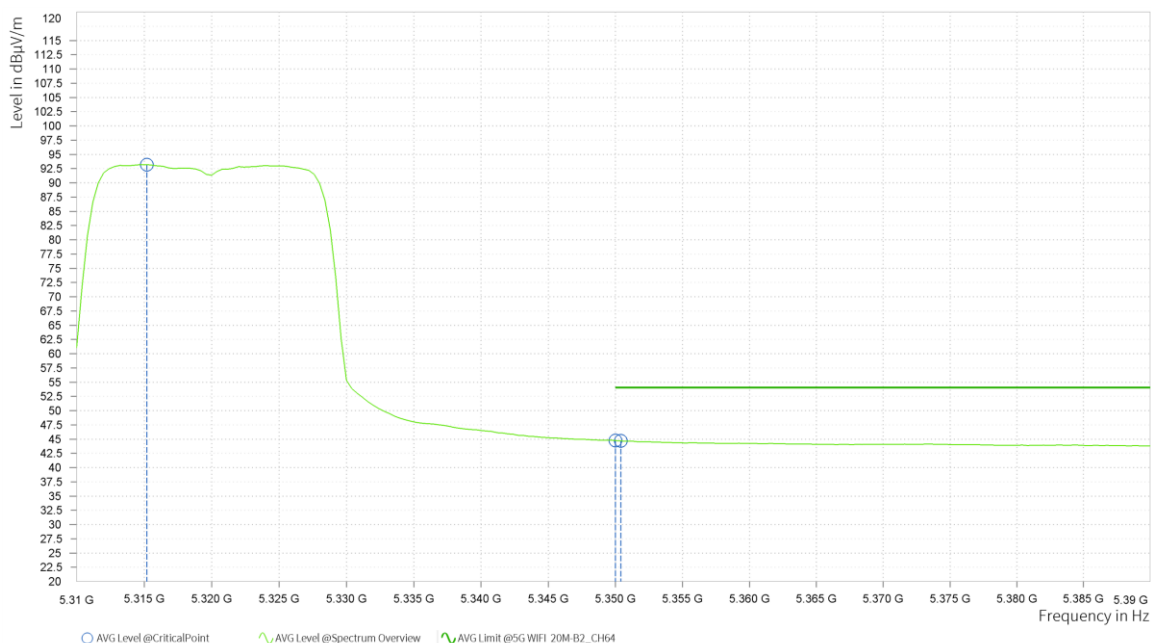

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5320MHz: Fundamental frequency.

**802.11n (20MHz)**

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,265.075	98.04			43.61	H	40.2	1.00
4	5,350.000	58.05	74.00	15.95	43.55	H	354.9	2.00
4	5,360.550	59.23	74.00	14.77	43.55	H	328.2	1.00





ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,265.550	87.30			43.61	H	40.2	1.00
4	5,350.000	44.31	54.00	9.69	43.55	H	40.2	1.00
4	5,351.525	44.31	54.00	9.69	43.55	H	40.2	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,266.030	103.44			43.61	V	359	1.00
4	5,350.000	58.54	74.00	15.46	43.55	V	1.4	2.00
4	5,370.050	59.14	74.00	14.86	43.55	V	139.4	2.00






ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,265.550	92.80			43.61	V	358.6	1.00
4	5,350.000	44.34	54.00	9.66	43.55	V	359.1	1.00
4	5,351.525	44.37	54.00	9.63	43.55	V	359.1	1.00

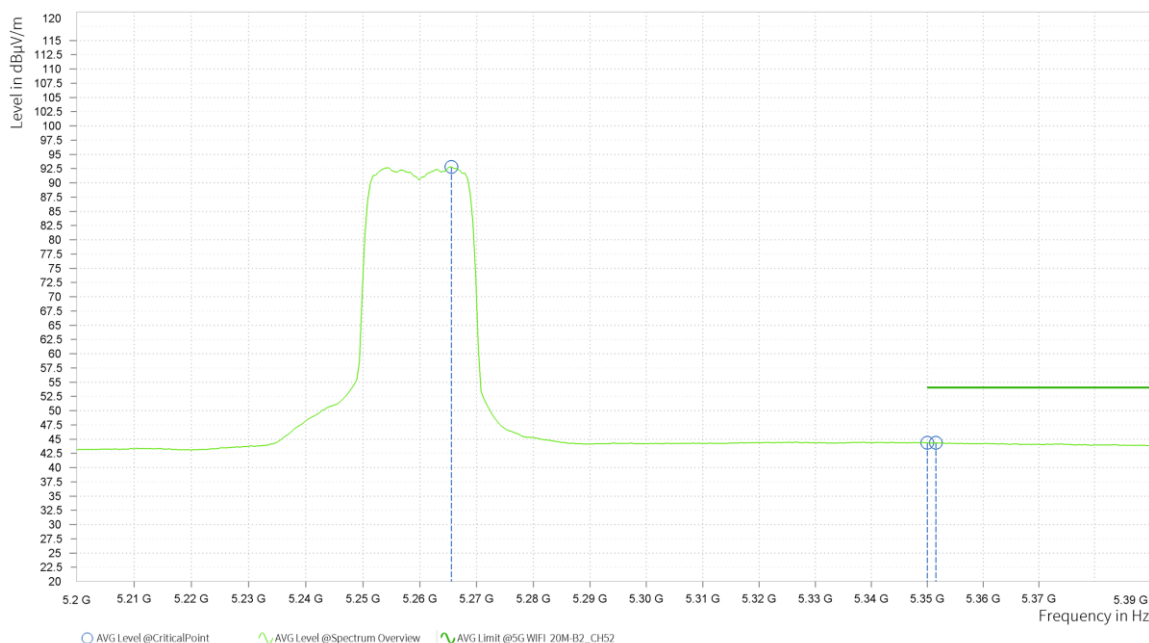

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5260MHz: Fundamental frequency.

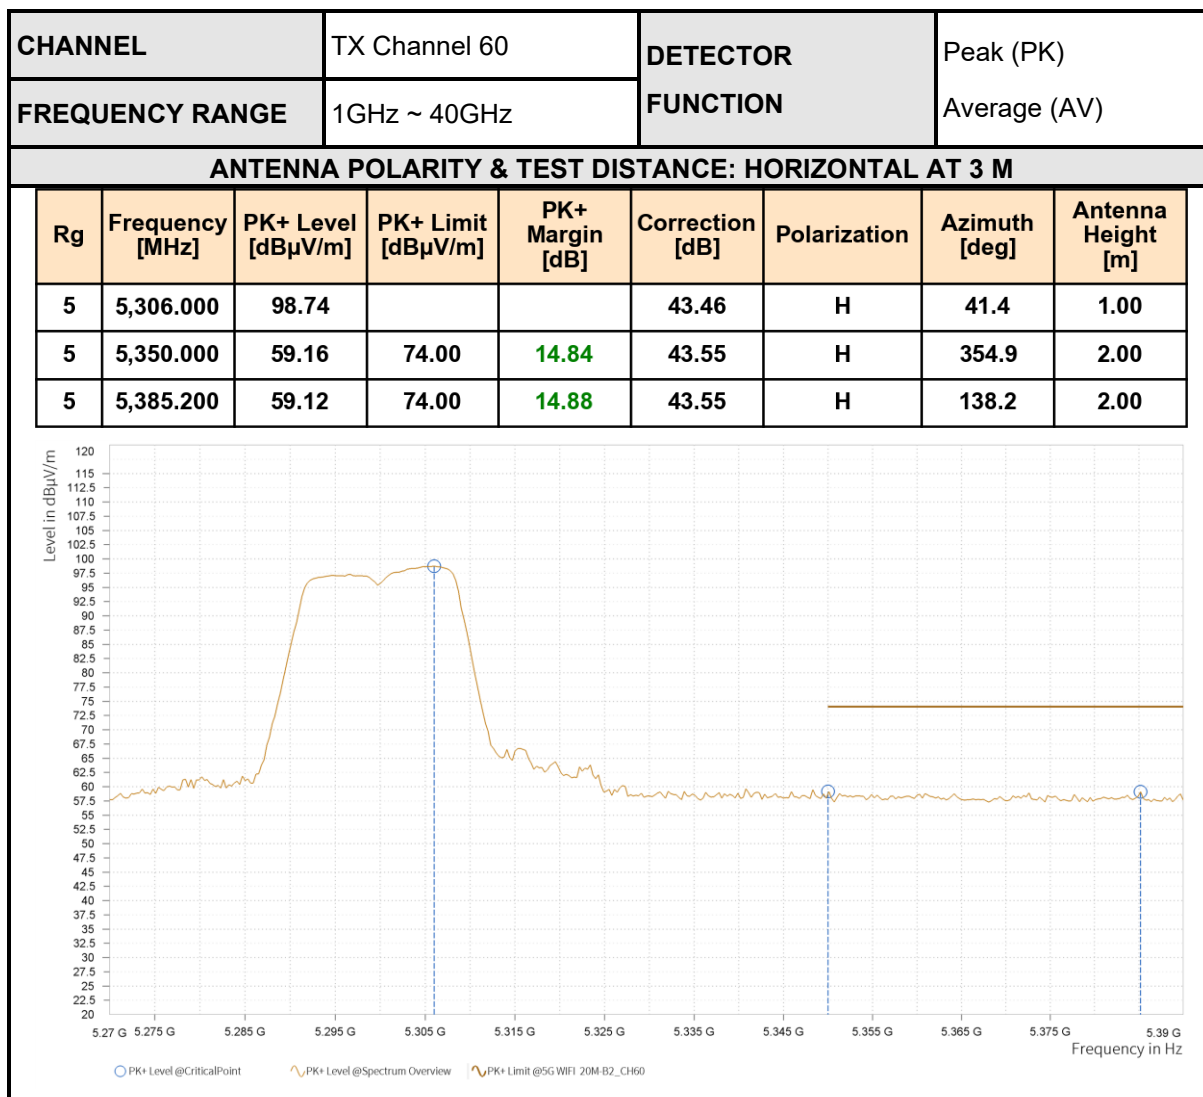



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,305.400	88.06			43.46	H	40.1	1.00
5	5,350.000	44.29	54.00	9.71	43.55	H	8.8	2.00
5	5,351.300	44.33	54.00	9.67	43.55	H	1	1.00

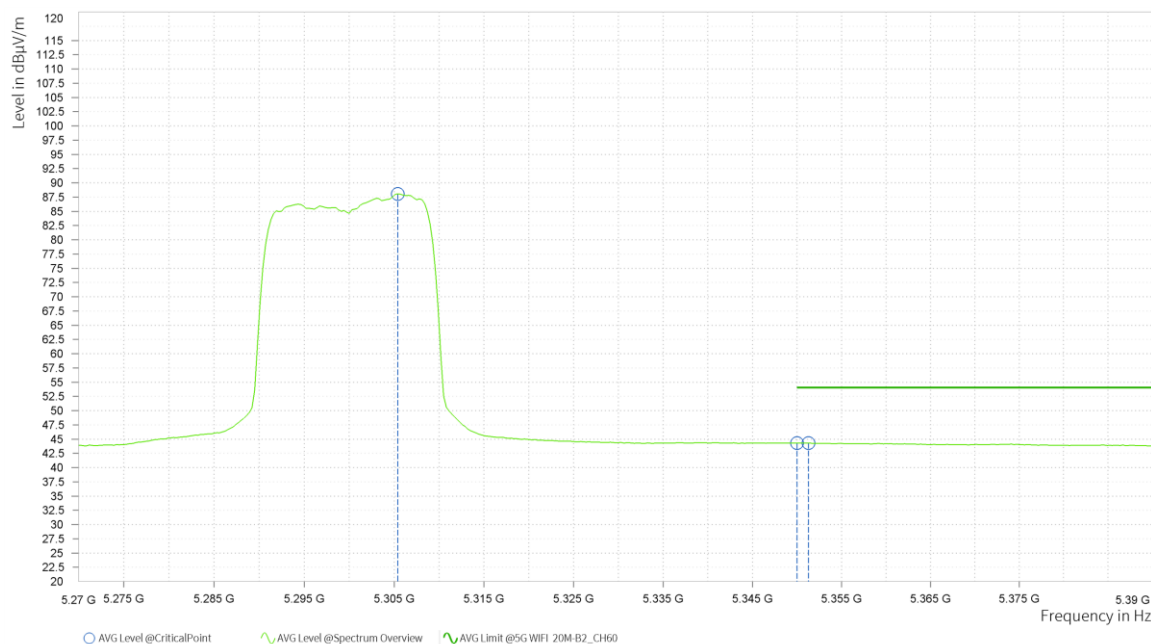



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,304.800	103.73			43.46	V	358.9	1.00
5	5,350.000	58.59	74.00	15.41	43.55	V	6.2	2.00
5	5,355.800	59.11	74.00	14.89	43.55	V	86.9	1.00

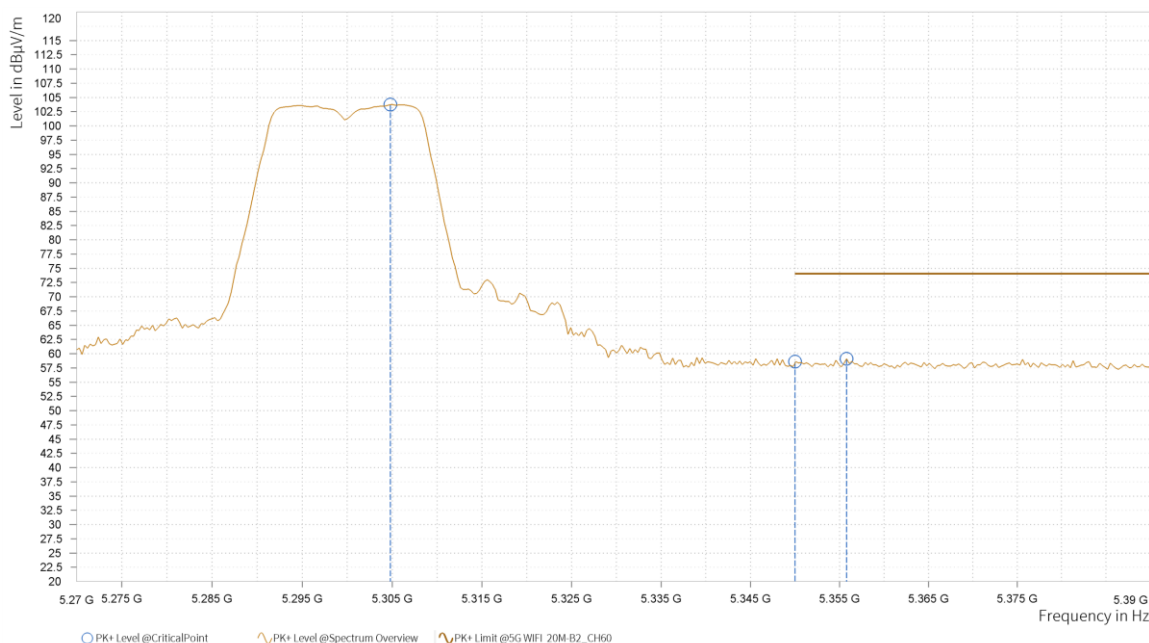




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,305.400	93.18			43.46	V	358.6	1.00
5	5,350.000	44.35	54.00	9.65	43.55	V	358.6	1.00
5	5,351.600	44.38	54.00	9.62	43.55	V	358.6	1.00

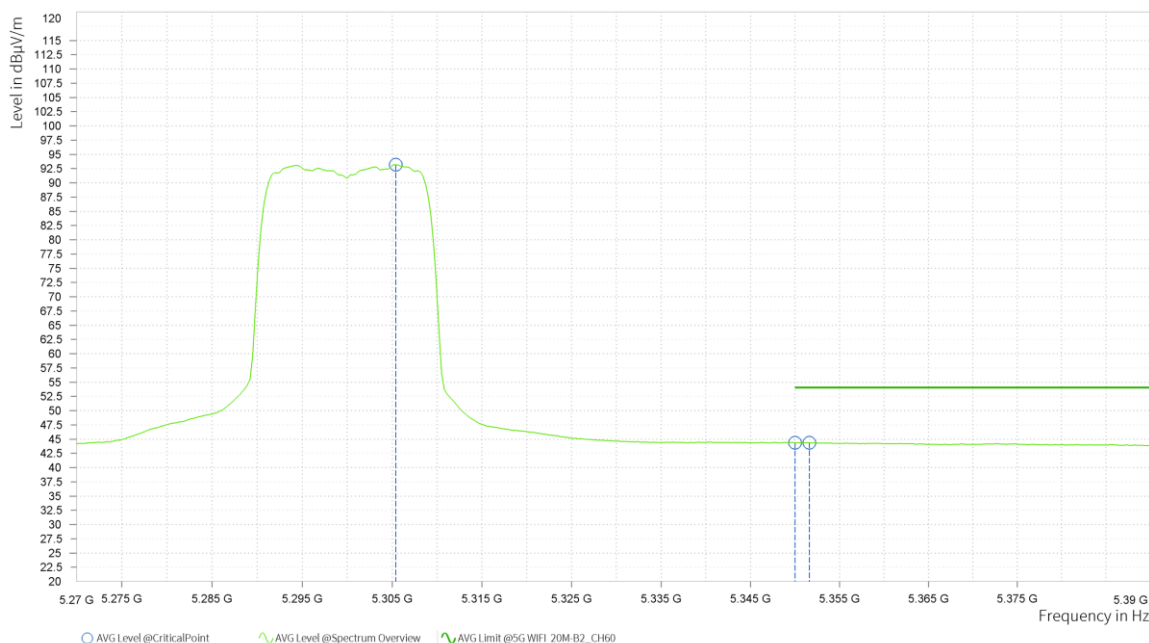

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5300MHz: Fundamental frequency.

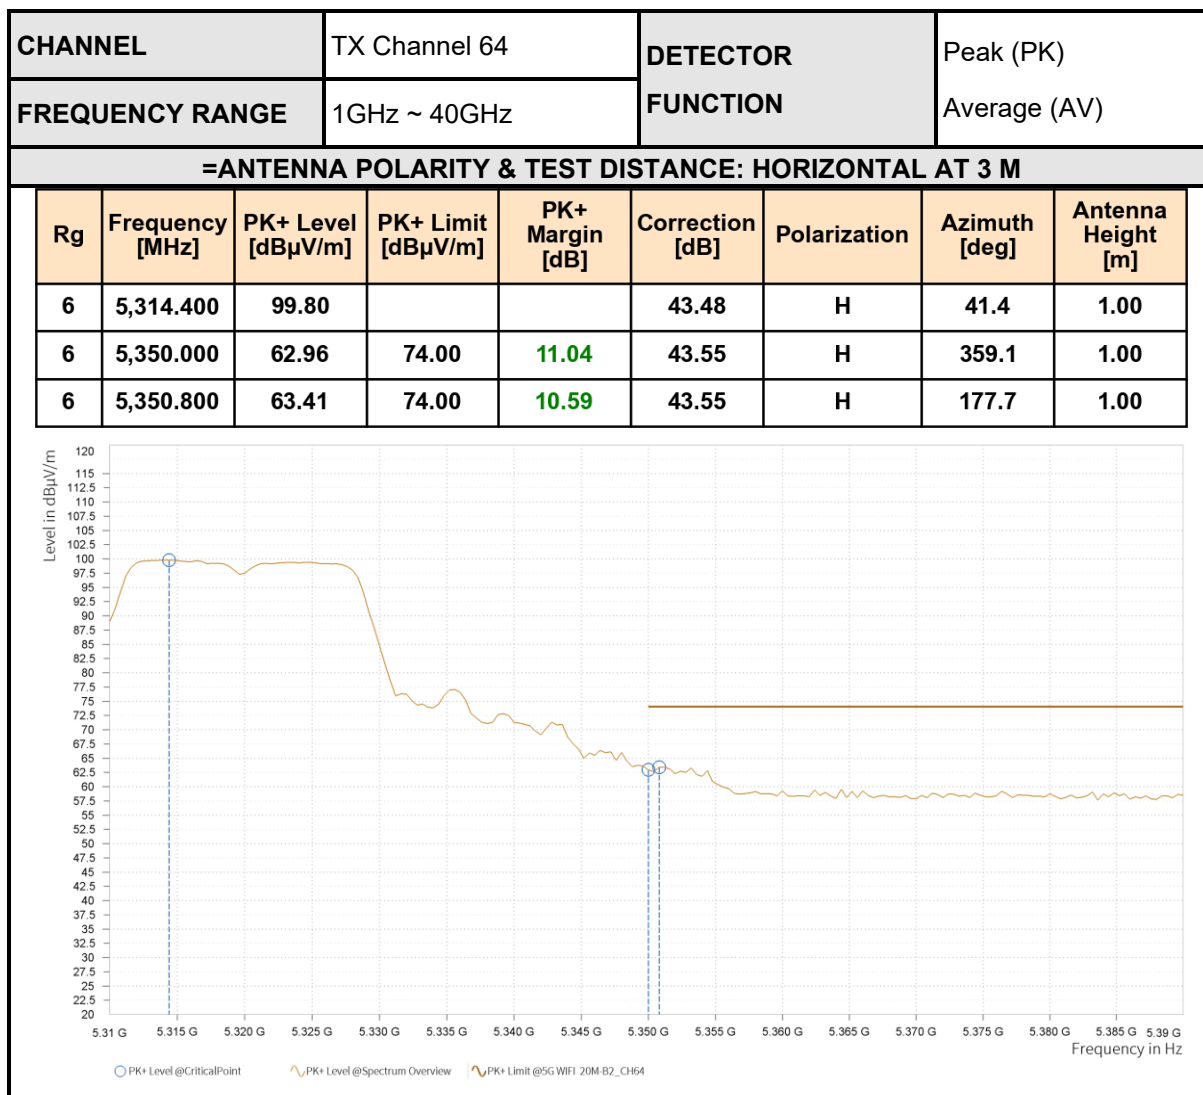



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,314.000	88.81			43.48	H	41.4	1.00
6	5,350.000	44.87	54.00	9.13	43.55	H	177.6	1.00
6	5,350.400	44.84	54.00	9.17	43.55	H	177.6	1.00

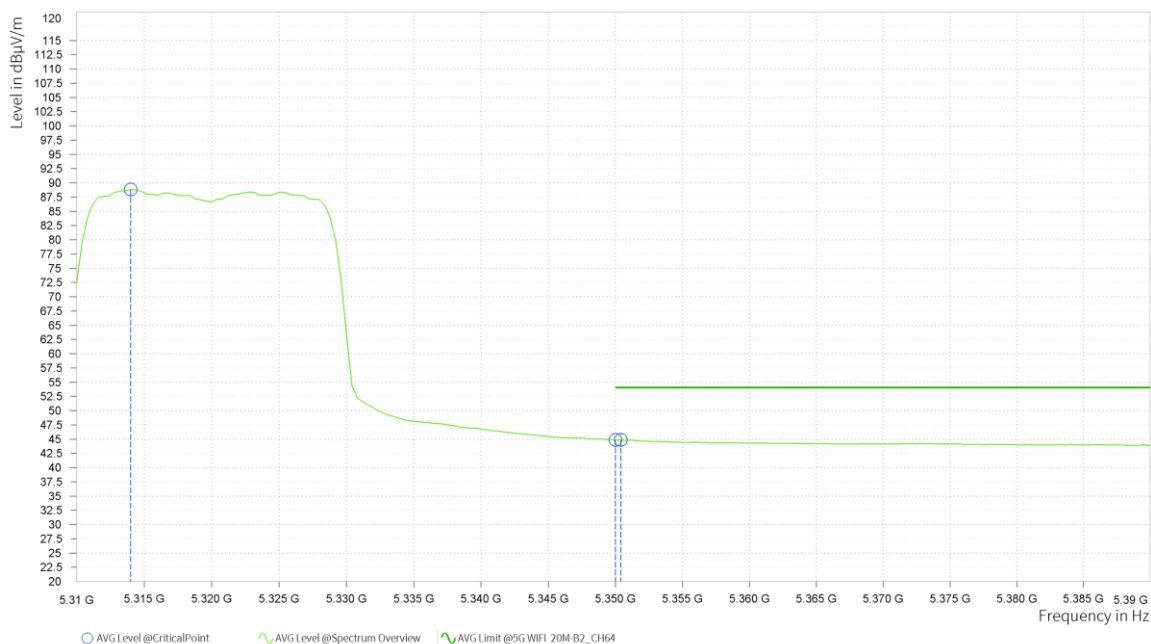



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,314.400	105.29			43.48	V	351.8	1.00
6	5,350.000	68.47	74.00	5.53	43.55	V	359	1.00
6	5,352.800	69.07	74.00	4.93	43.55	V	351.8	1.00

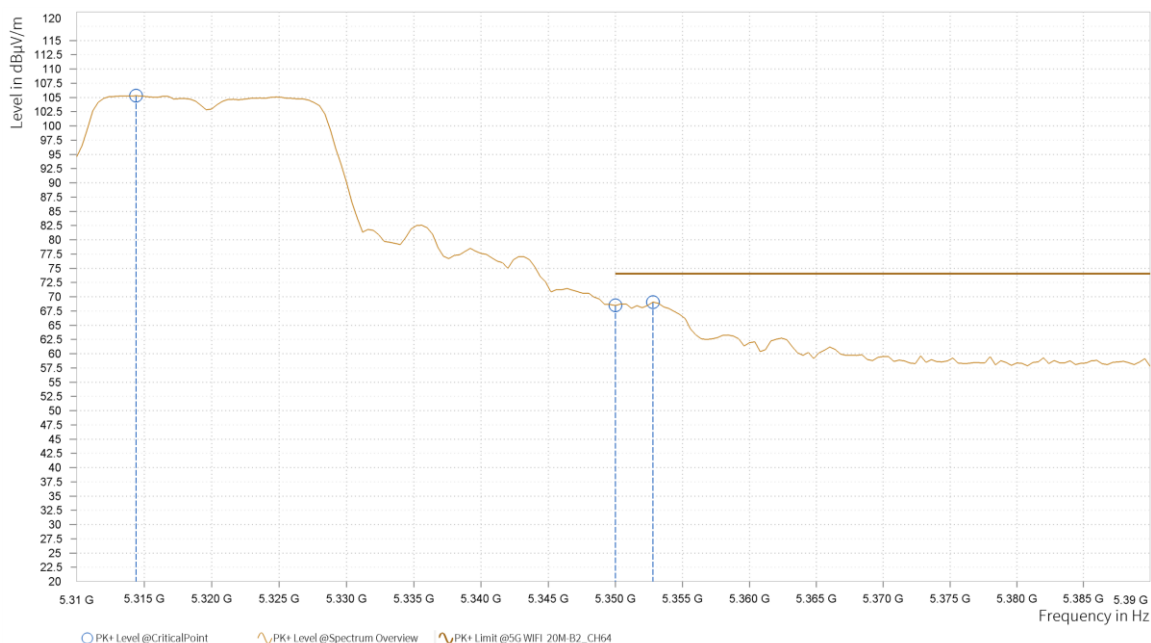



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,314.000	93.76			43.48	V	350	1.00
6	5,350.000	45.42	54.00	8.58	43.55	V	358.7	1.00
6	5,350.400	45.36	54.00	8.64	43.55	V	350	1.00

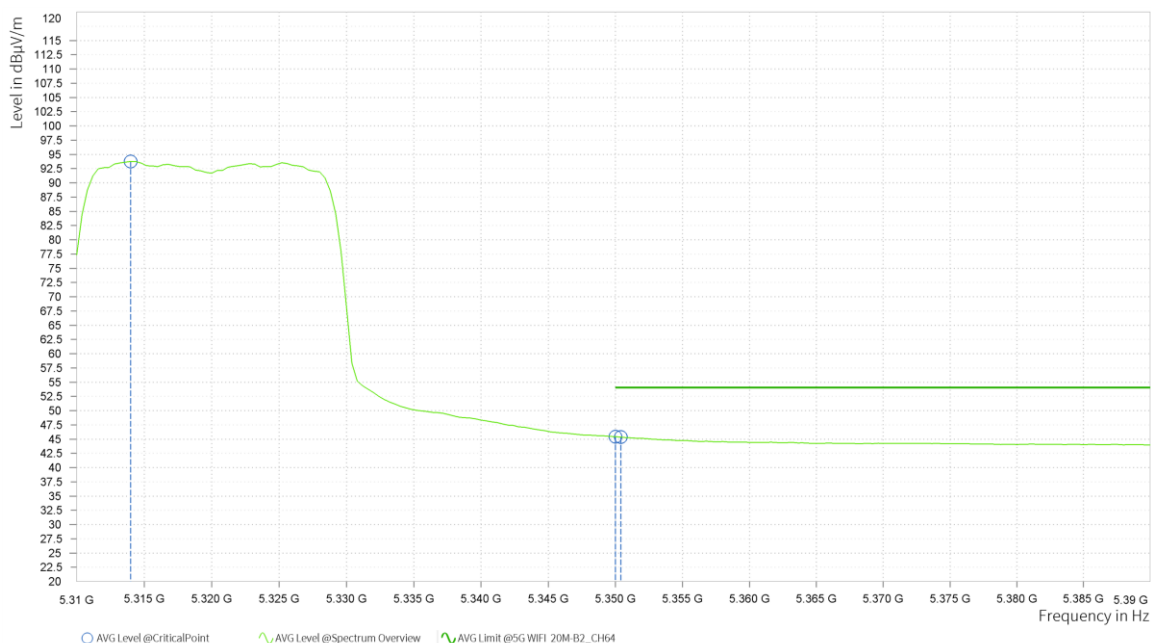

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5320MHz: Fundamental frequency.




802.11n (40MHz)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,267.133	94.28			43.60	H	355.6	2.00
3	5,350.000	58.43	74.00	15.57	43.55	H	355.6	2.00
3	5,365.400	58.89	74.00	15.11	43.55	H	359.1	1.00

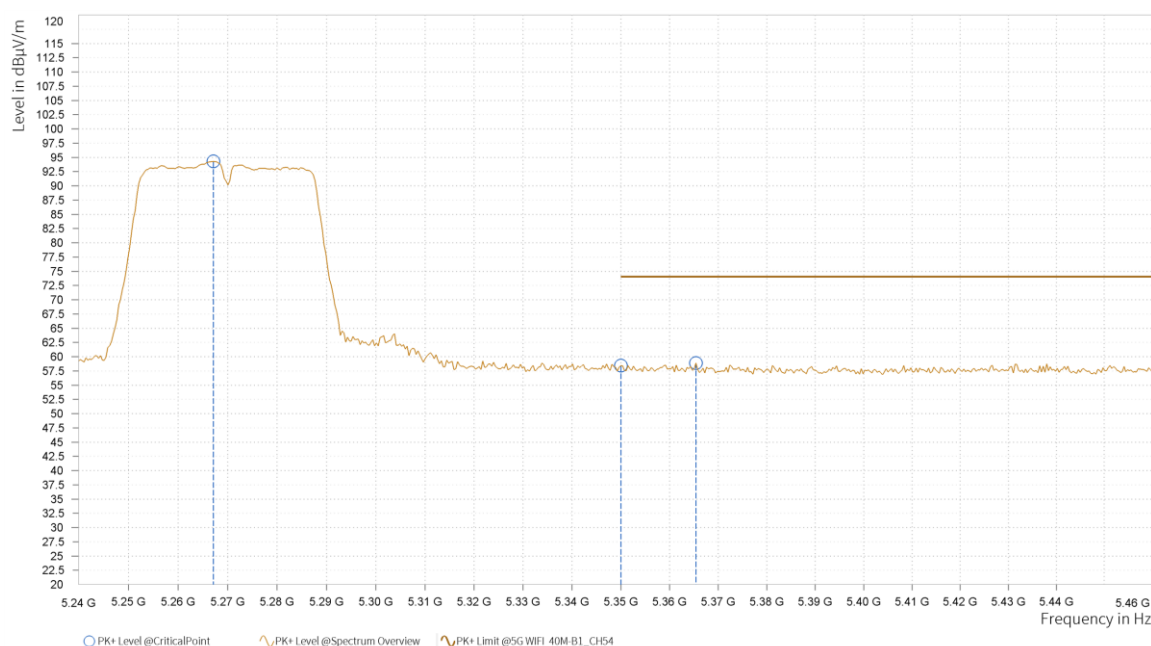



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,268.233	83.69			43.60	H	355.6	2.00
3	5,350.000	44.21	54.00	9.79	43.55	H	319.9	2.00
3	5,352.200	44.25	54.00	9.75	43.55	H	359	2.00






ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,267.500	98.87			43.60	V	5	1.00
3	5,350.000	57.96	74.00	16.04	43.55	V	355	2.00
3	5,425.900	59.03	74.00	14.97	43.81	V	79.7	2.00

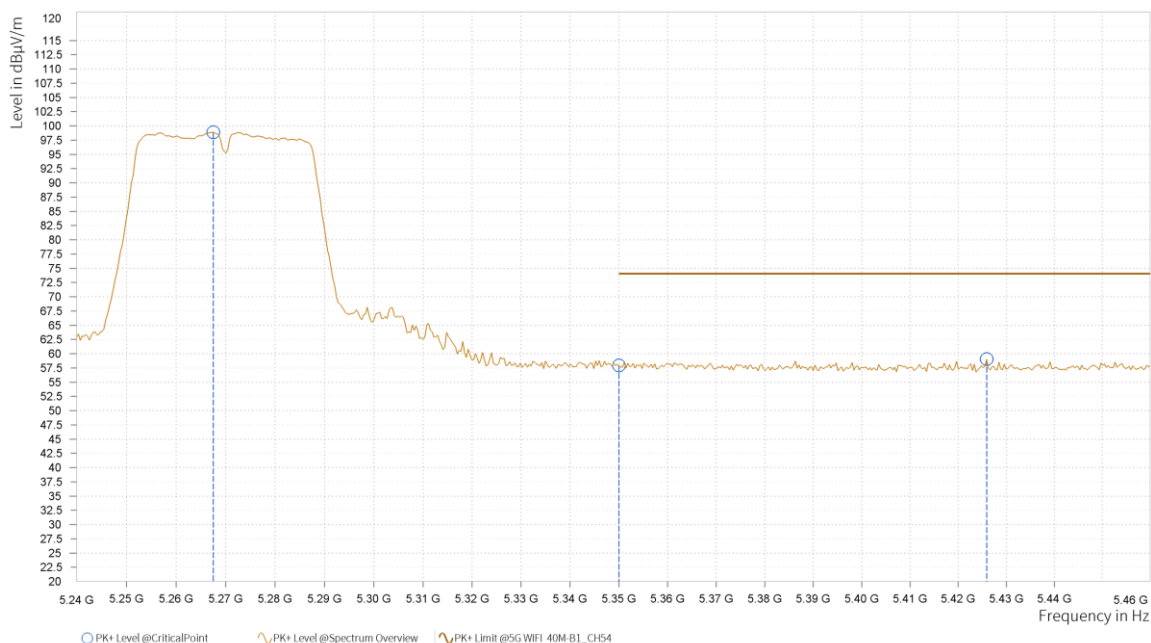

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,271.533	88.28			43.58	V	5	1.00
3	5,350.000	44.24	54.00	9.76	43.55	V	359	1.00
3	5,351.100	44.24	54.00	9.76	43.55	V	316.2	1.00

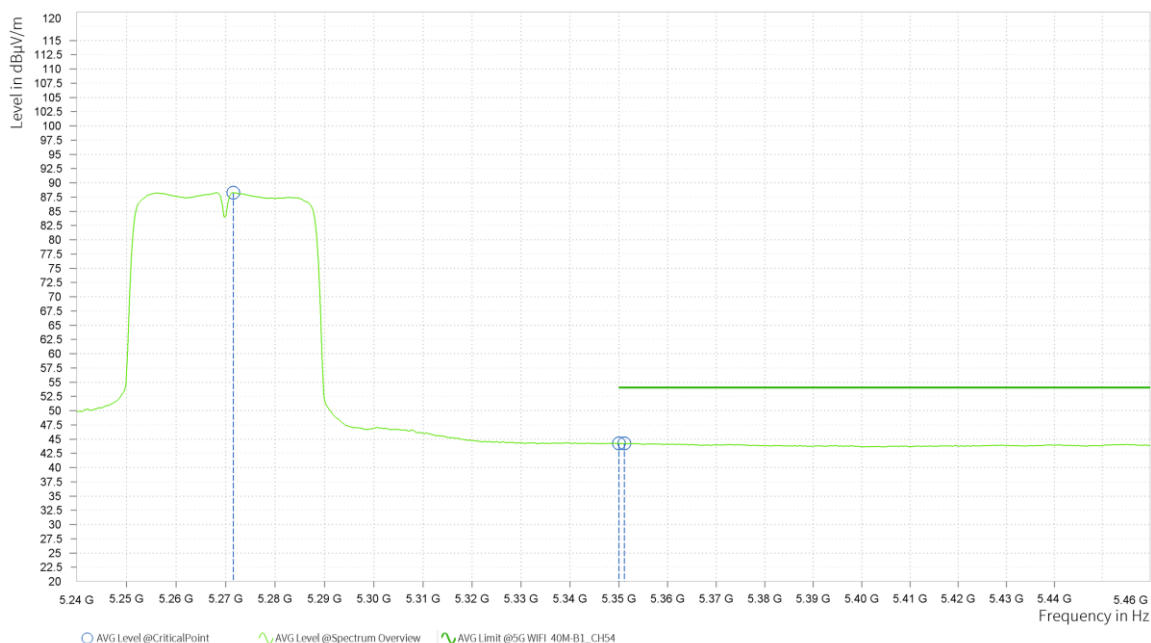**REMARKS:**


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5270MHz: Fundamental frequency.



CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,307.500	94.71			43.47	H	181.2	1.00
4	5,350.000	61.94	74.00	12.06	43.55	H	181.2	1.00
4	5,351.500	64.10	74.00	9.90	43.55	H	227.8	1.00

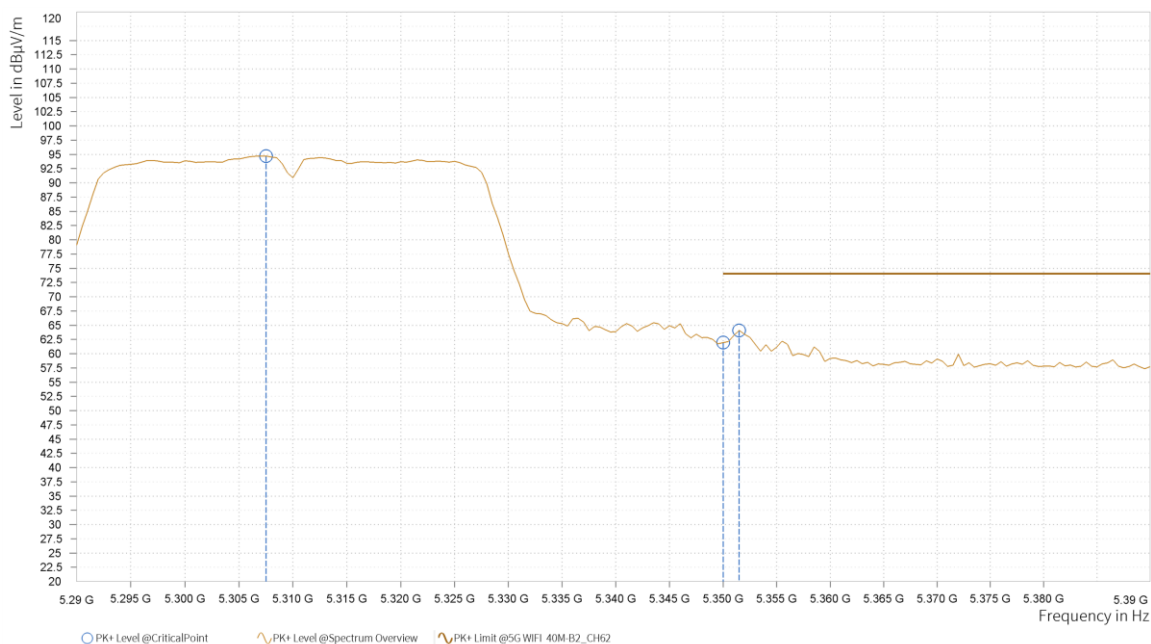



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,296.000	84.02			43.46	H	183.6	1.00
4	5,350.000	45.40	54.00	8.60	43.55	H	231.4	1.00
4	5,351.000	45.35	54.00	8.65	43.55	H	231.4	1.00

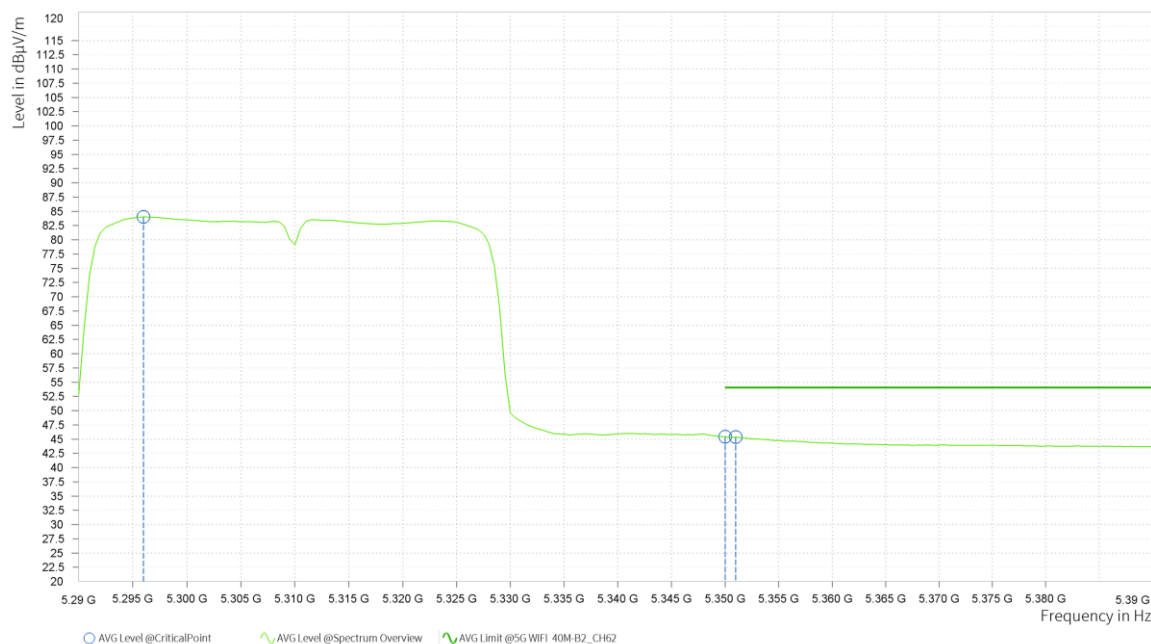



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,307.000	99.71			43.47	V	352.2	1.00
4	5,350.000	65.32	74.00	8.68	43.55	V	359.1	1.00
4	5,351.500	68.21	74.00	5.79	43.55	V	352.2	1.00

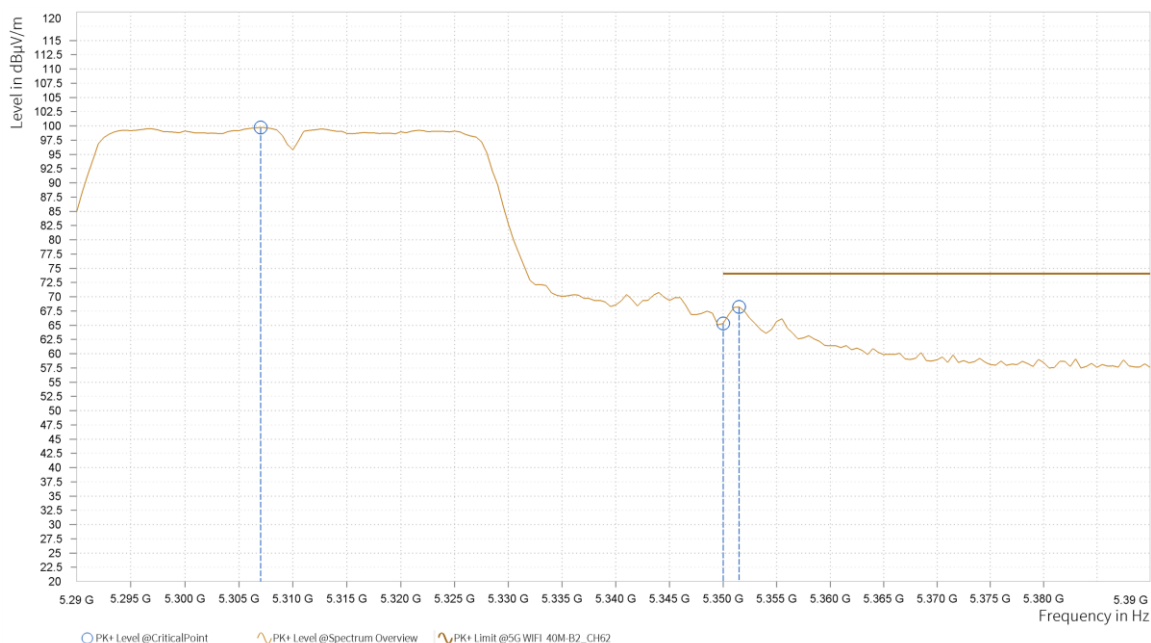



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,311.500	88.74			43.48	V	355.4	1.00
4	5,350.000	46.82	54.00	7.18	43.55	V	325.8	1.00
4	5,350.500	46.77	54.00	7.23	43.55	V	325.8	1.00

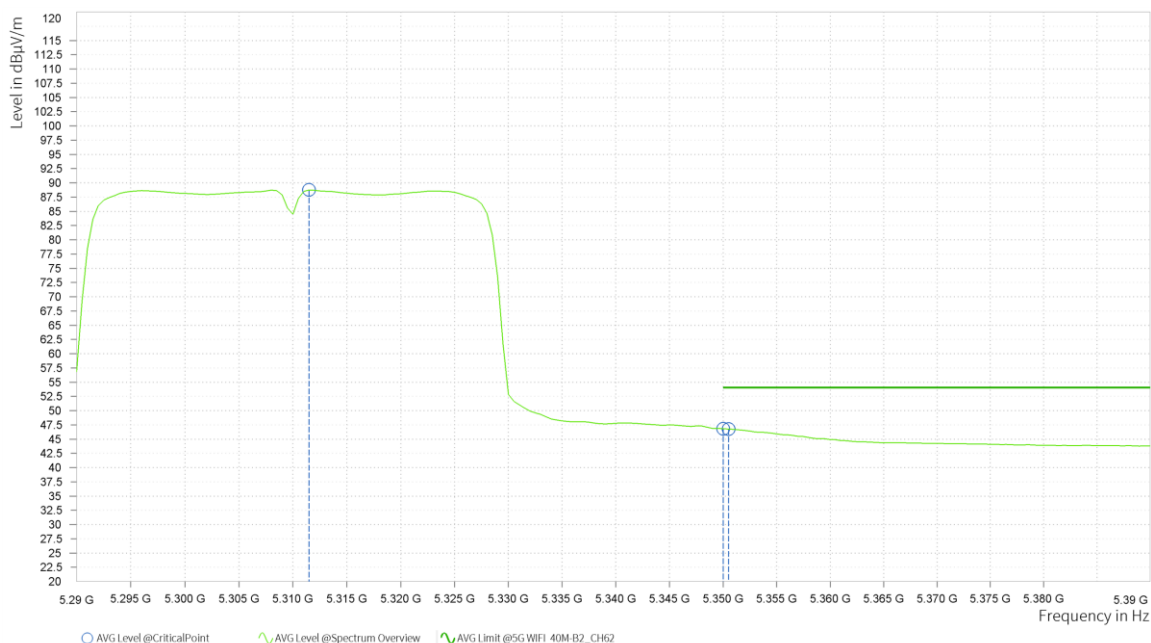

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5310MHz: Fundamental frequency.

**802.11ac (20MHz)**

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,254.625	95.86			43.66	H	177.7	1.00
4	5,350.000	57.69	74.00	16.31	43.55	H	350.6	1.00
4	5,384.775	59.14	74.00	14.86	43.55	H	122.6	2.00

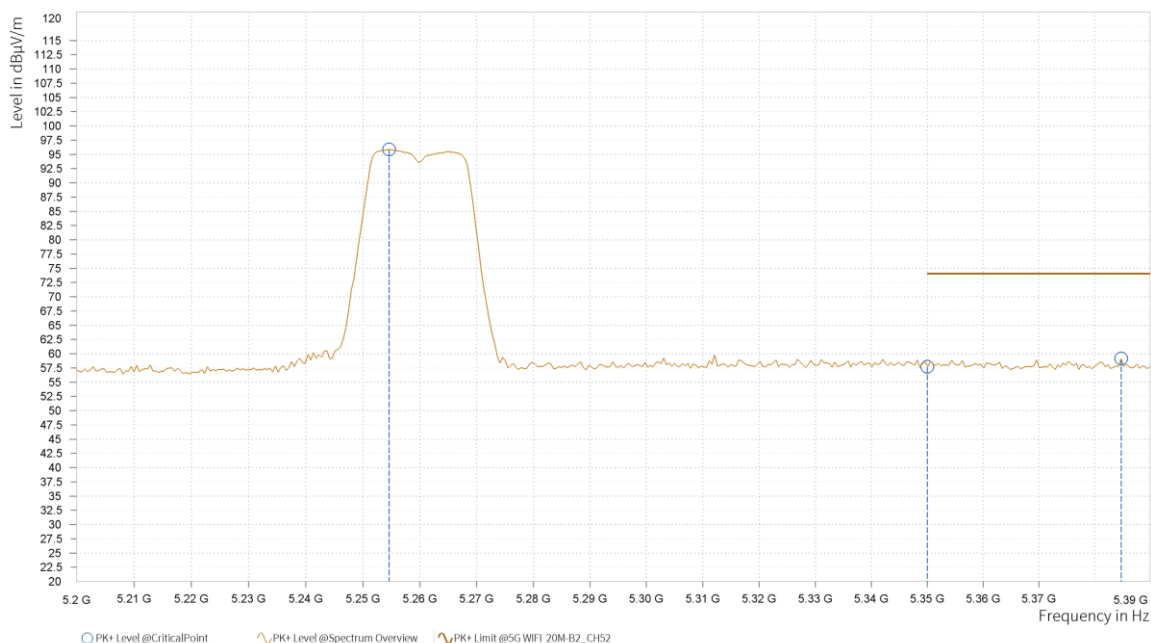



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,254.625	85.03			43.66	H	178.8	1.00
4	5,350.000	44.19	54.00	9.81	43.55	H	359	1.00
4	5,350.575	44.23	54.00	9.77	43.55	H	86.8	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,266.025	100.41			43.61	V	333	1.00
4	5,350.000	58.43	74.00	15.57	43.55	V	137	1.00
4	5,366.725	58.64	74.00	15.36	43.55	V	135.8	2.00






ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,265.075	89.47			43.61	V	353.1	1.00
4	5,350.000	44.22	54.00	9.78	43.55	V	1	1.00
4	5,351.525	44.21	54.00	9.79	43.55	V	1	1.00



REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5260MHz: Fundamental frequency.

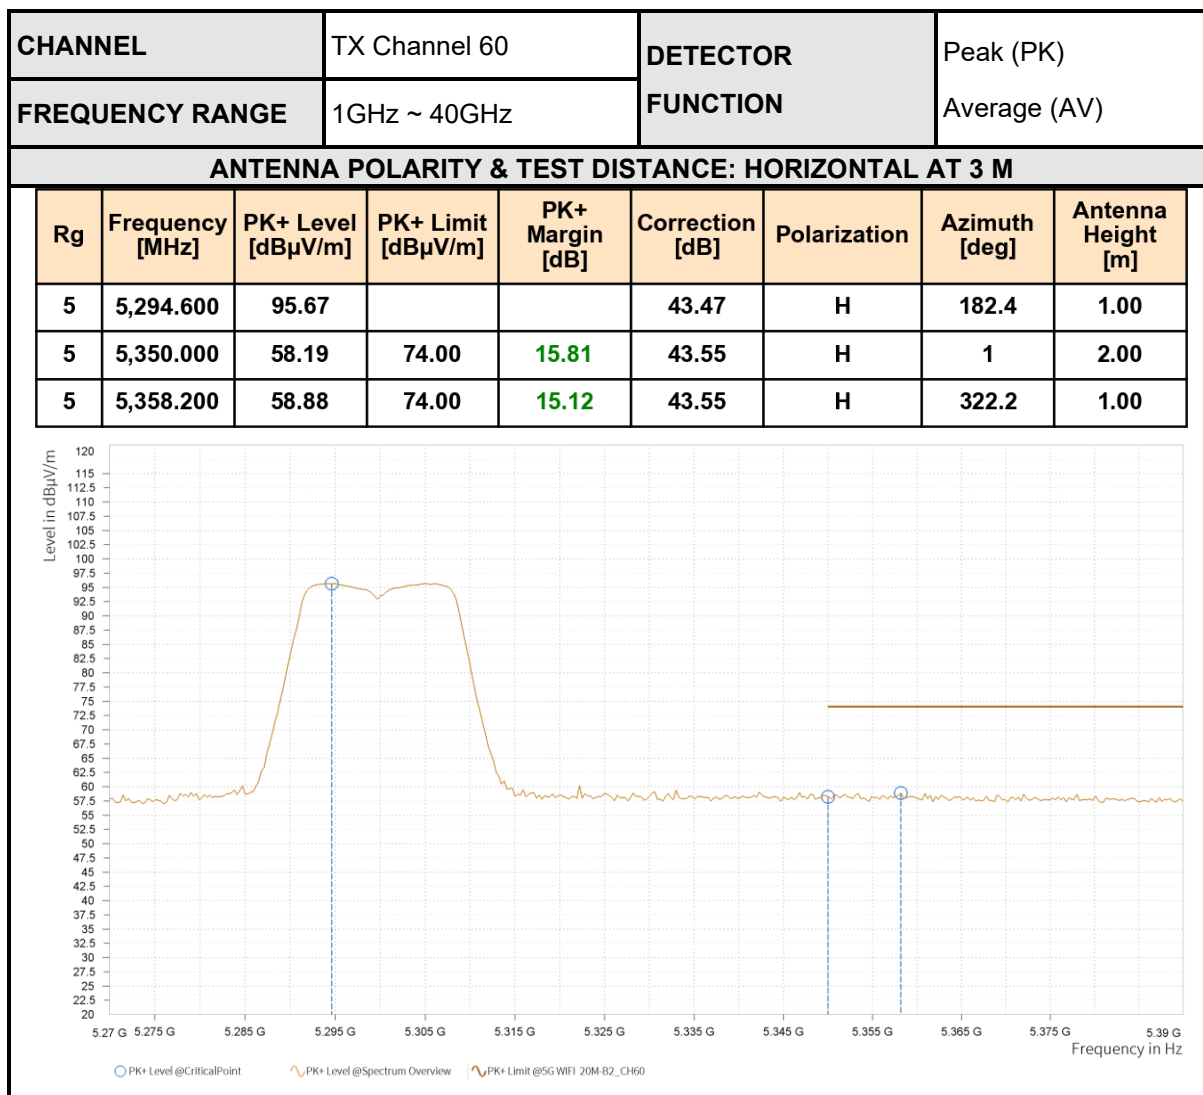



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,294.600	85.22			43.47	H	180	1.00
5	5,350.000	44.21	54.00	9.79	43.55	H	1	1.00
5	5,351.600	44.24	54.00	9.76	43.55	H	224.2	1.00

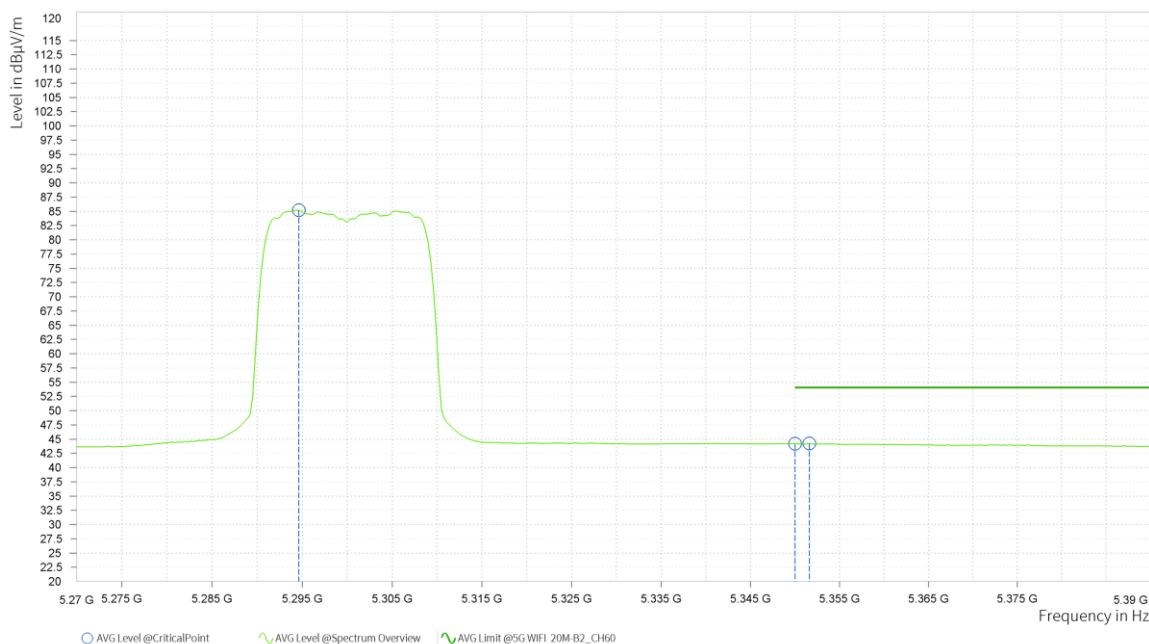



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,305.100	100.98			43.46	V	352.6	1.00
5	5,350.000	58.11	74.00	15.89	43.55	V	41.4	2.00
5	5,381.900	59.61	74.00	14.39	43.55	V	41.4	1.00

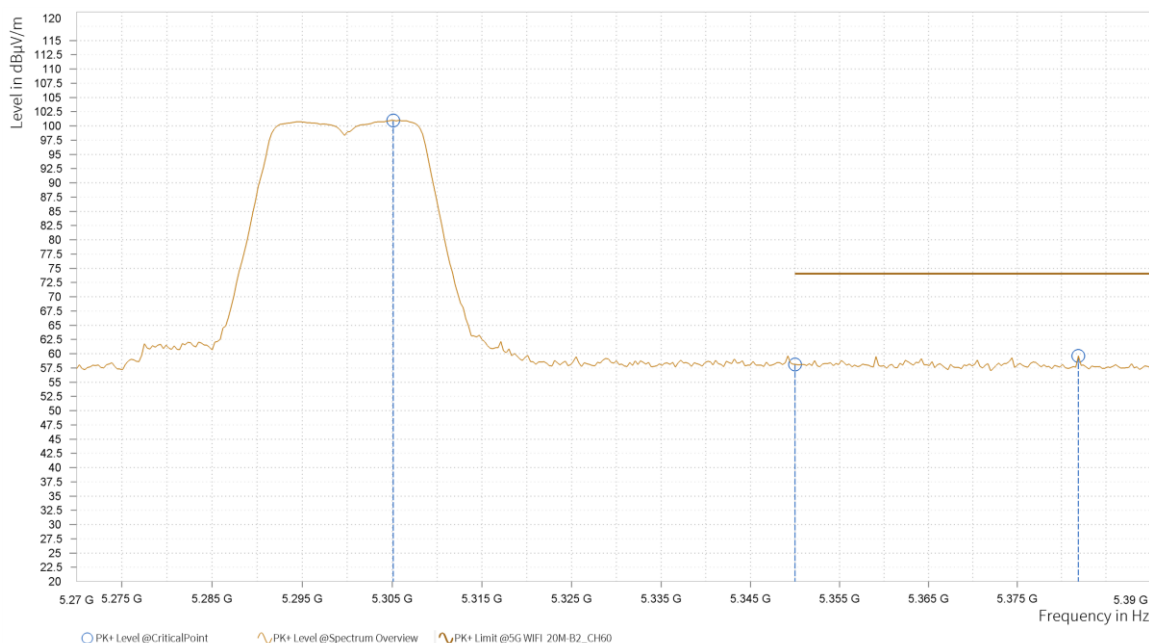



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,305.400	90.29			43.46	V	354.9	1.00
5	5,350.000	44.26	54.00	9.74	43.55	V	323.5	1.00
5	5,350.400	44.26	54.00	9.74	43.55	V	323.5	1.00

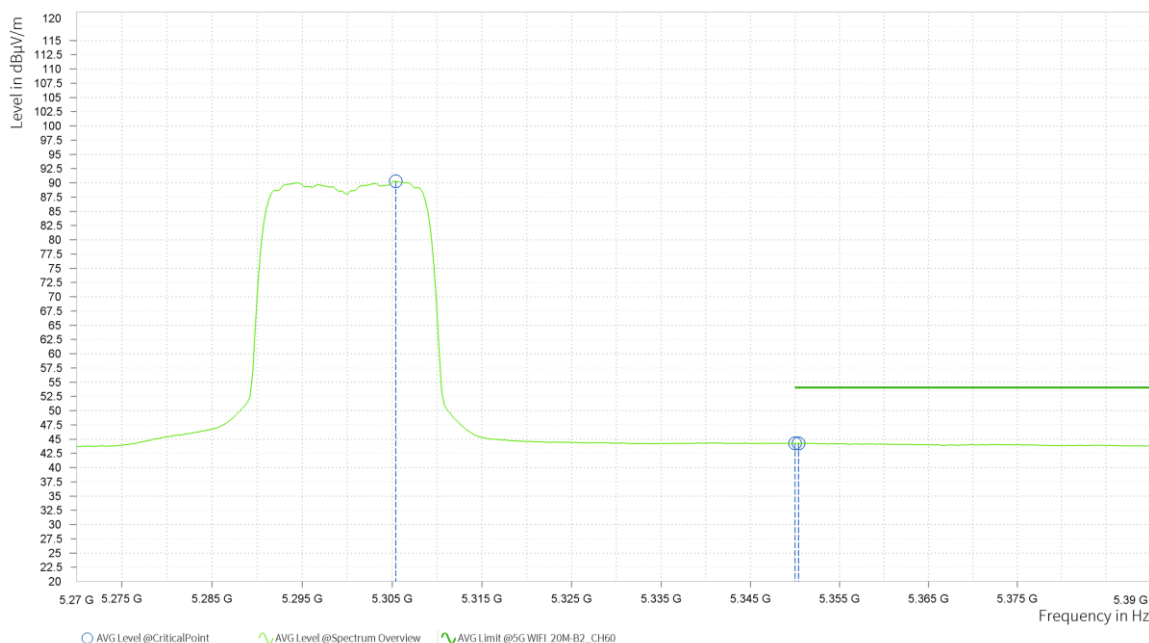

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5300MHz: Fundamental frequency.