

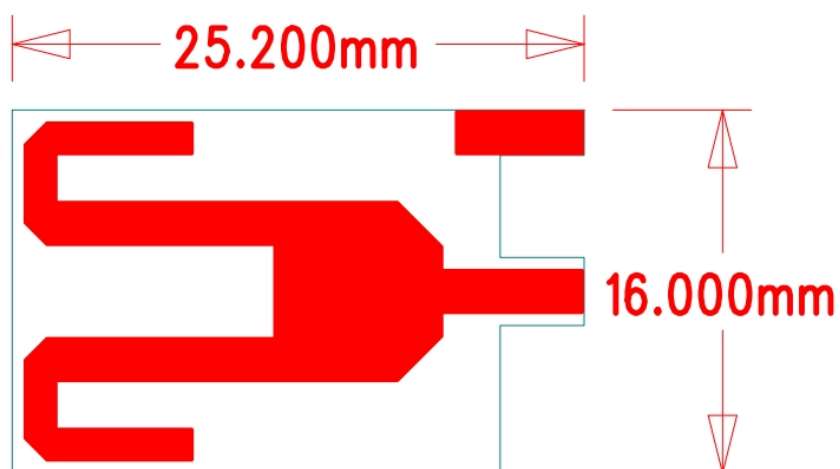
Measurement of Antenna for CP3 Pro Project

Manufacture: SHENZHEN TENDA TECHNOLOGY CO., LTD.

6-8 Floor, Tower E3, No.1001, Zhongshanyuan Road, Nanshan
District, Shenzhen, China. 518052

Model: CP3 Pro PCB Antenna

1. Antenna Appearance:

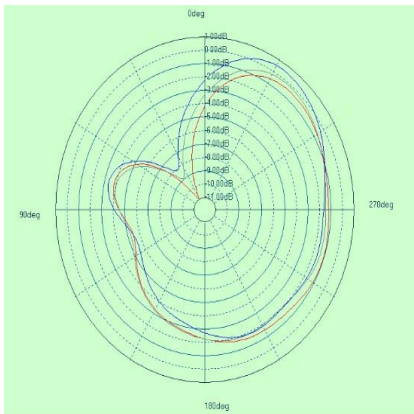
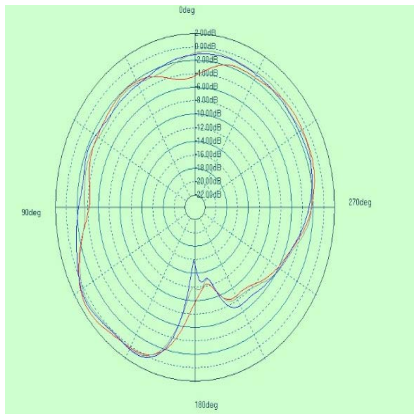


2. Electrical performance test results at normal temperature

a) 2. 4G Antenna

No	Test Item	Unit	Demand Performance	Test Result		Judgement
1	Frequency Range	MHz	2400-2490	2400-2490		OK
2	Gain	dBi	2	2410	1. 94	OK
				2450	1. 71	OK
				2483	1. 88	OK
3	Return loss	dB	≤ -10	2412	-27	OK
				2450	-25	OK
				2483	-26	OK

Directional diagram

EUT		
Remark		
Frequency	E Total. dB(dBi)	Efficiency()
2400MHz	1.98	65%
2410MHz	1.94	65%
2420MHz	1.64	64%
2430MHz	1.53	64%
2440MHz	1.76	64%
2450MHz	1.71	64%
2460MHz	1.72	64%
2470MHz	1.85	65%
2480MHz	1.88	67%
2490MHz	1.82	65%
	H PLANE	V PLANE
2D Radiation patterns(2412MHz) Red line: Co-Polarization Blue line: Cross-Polarization Green line: Total Field		

2. 4G Return loss test

