


Test Report No.: RF260714B018

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,010.000	44.82	88.20	43.38	34.53	68.20	33.67	7.79	V	0.9	2.00
2	15,832.000	52.27	74.00	21.73	38.92	54.00	15.08	10.43	V	358.6	1.00

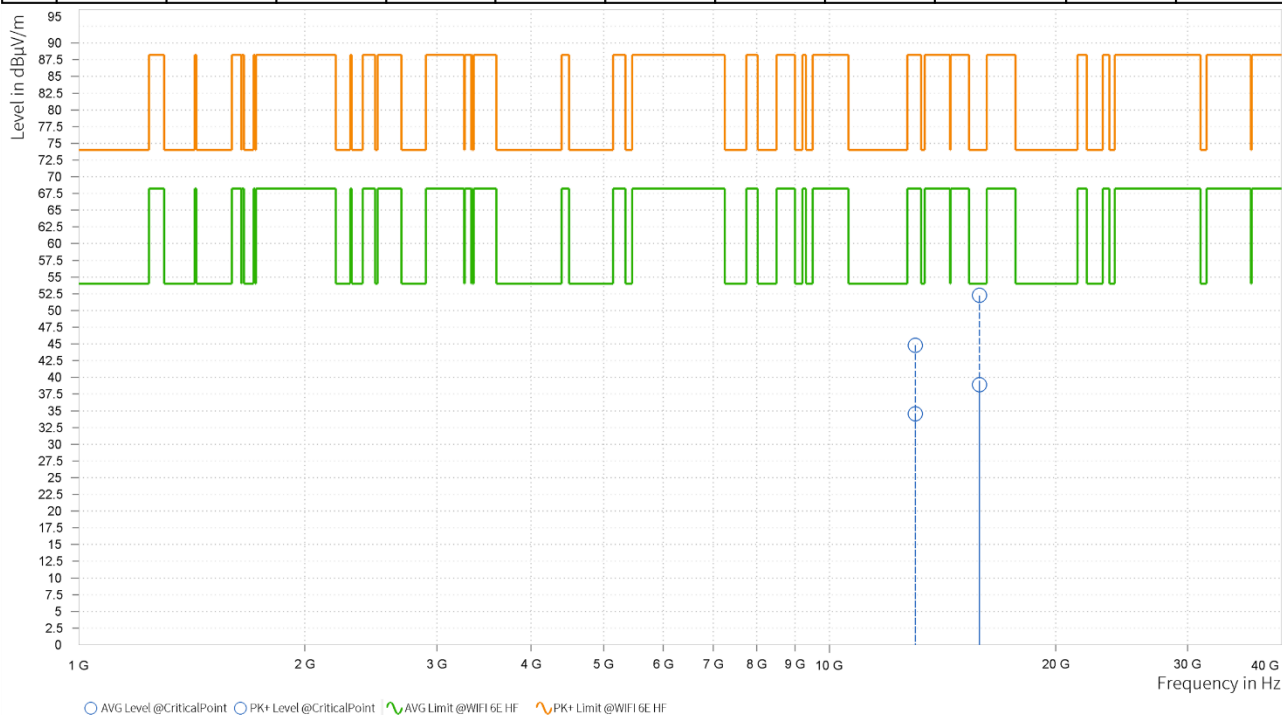

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6965MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




Test Report No.: RF260714B018
802.11be (20MHz)

CHANNEL	TX Channel 113	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,030.000	44.69	88.20	43.51	33.99	68.20	34.21	7.83	H	359	2.00
2	15,821.000	51.52	74.00	22.48	38.80	54.00	15.20	10.42	H	235.8	1.00

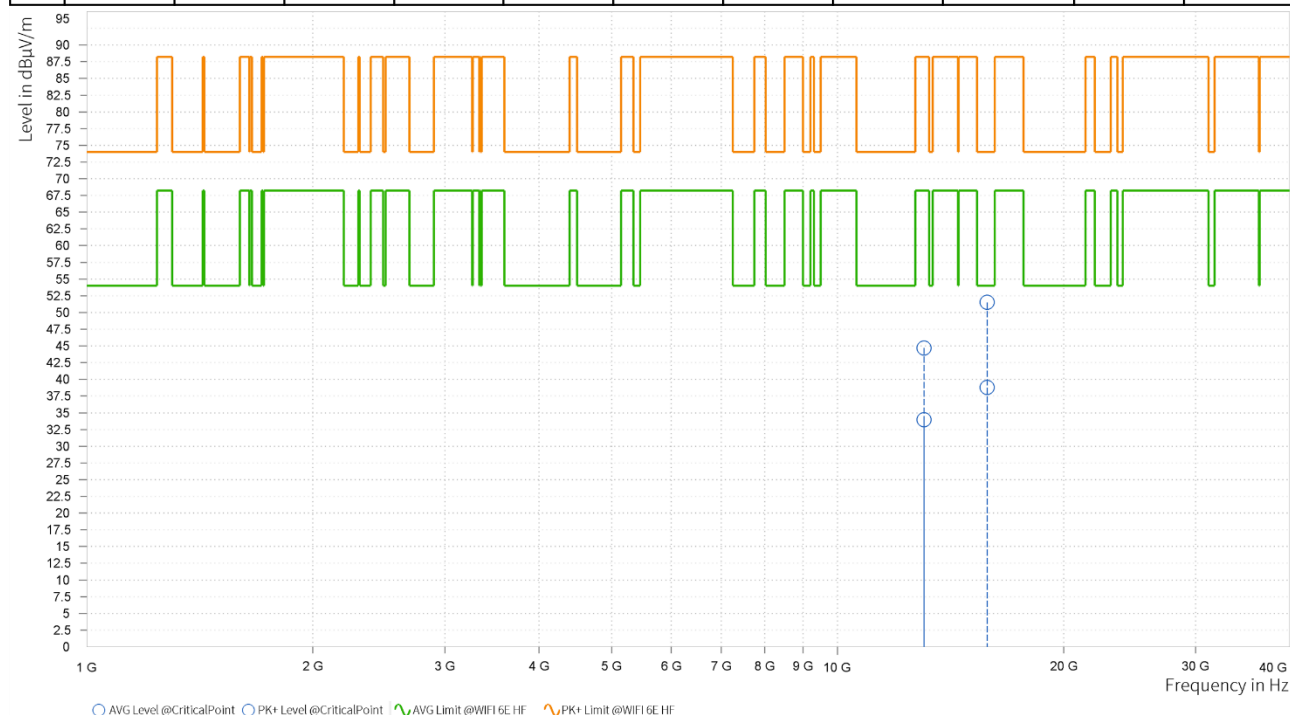

Test Report No.: RF260714B018

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,030.000	44.84	88.20	43.36	34.36	68.20	33.84	7.83	V	4.7	2.00
2	16,062.000	50.85	74.00	23.15	38.55	54.00	15.45	11.38	V	359	2.00

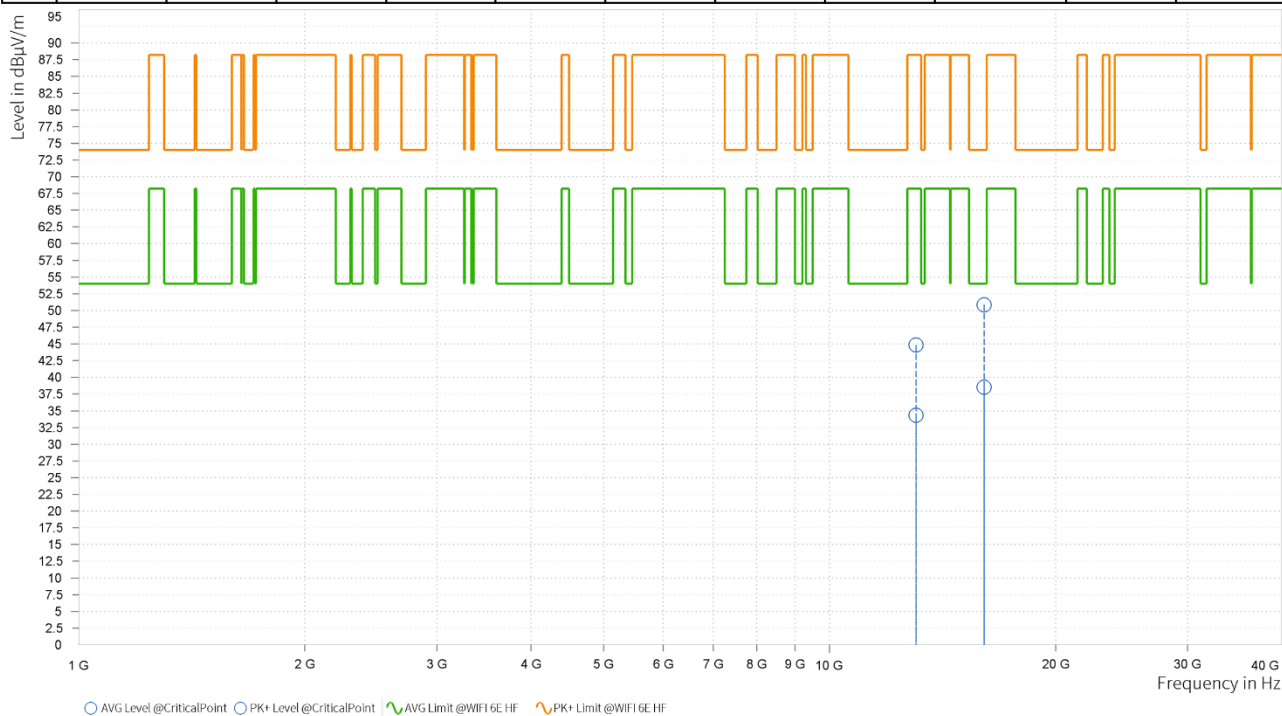

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6175MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




Test Report No.: RF260714B018
802.11be (40MHz)

CHANNEL	TX Channel 147	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,370.000	44.30	74.00	29.70	34.13	54.00	19.87	7.86	H	1	2.00
2	15,633.500	50.91	74.00	23.09	38.49	54.00	15.51	10.41	H	119.4	2.00

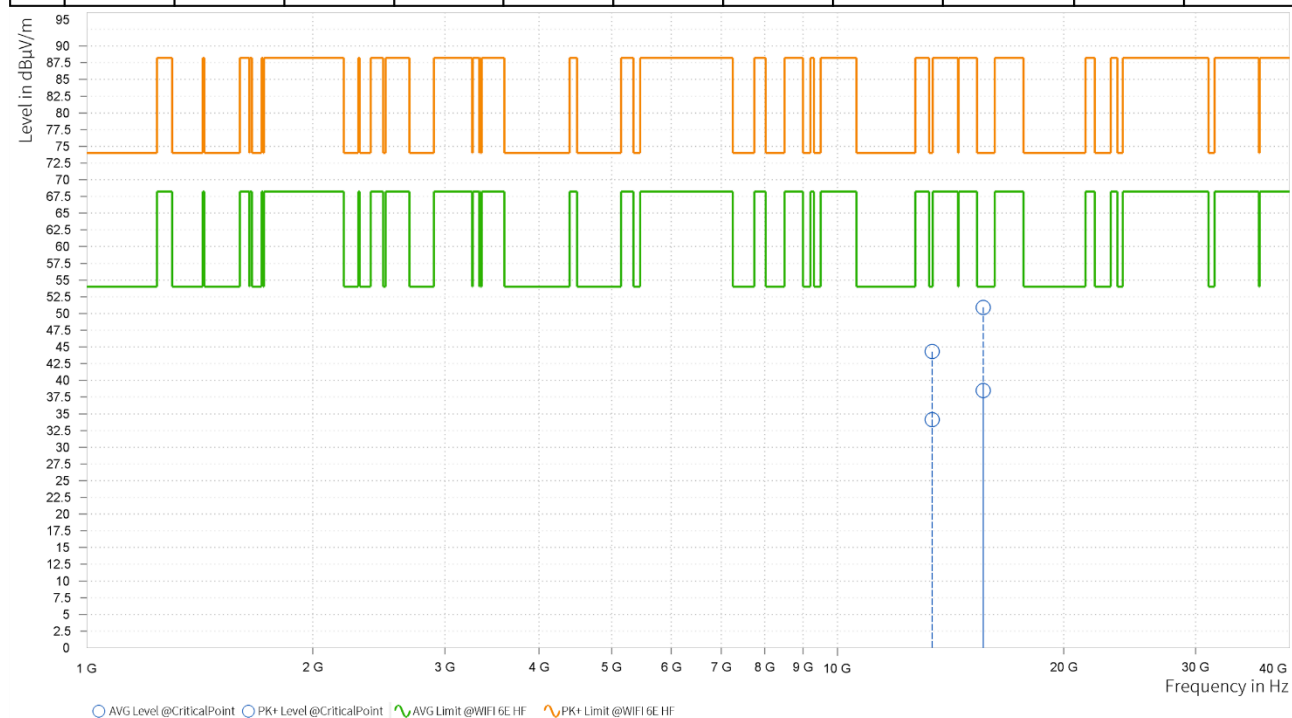

Test Report No.: RF260714B018

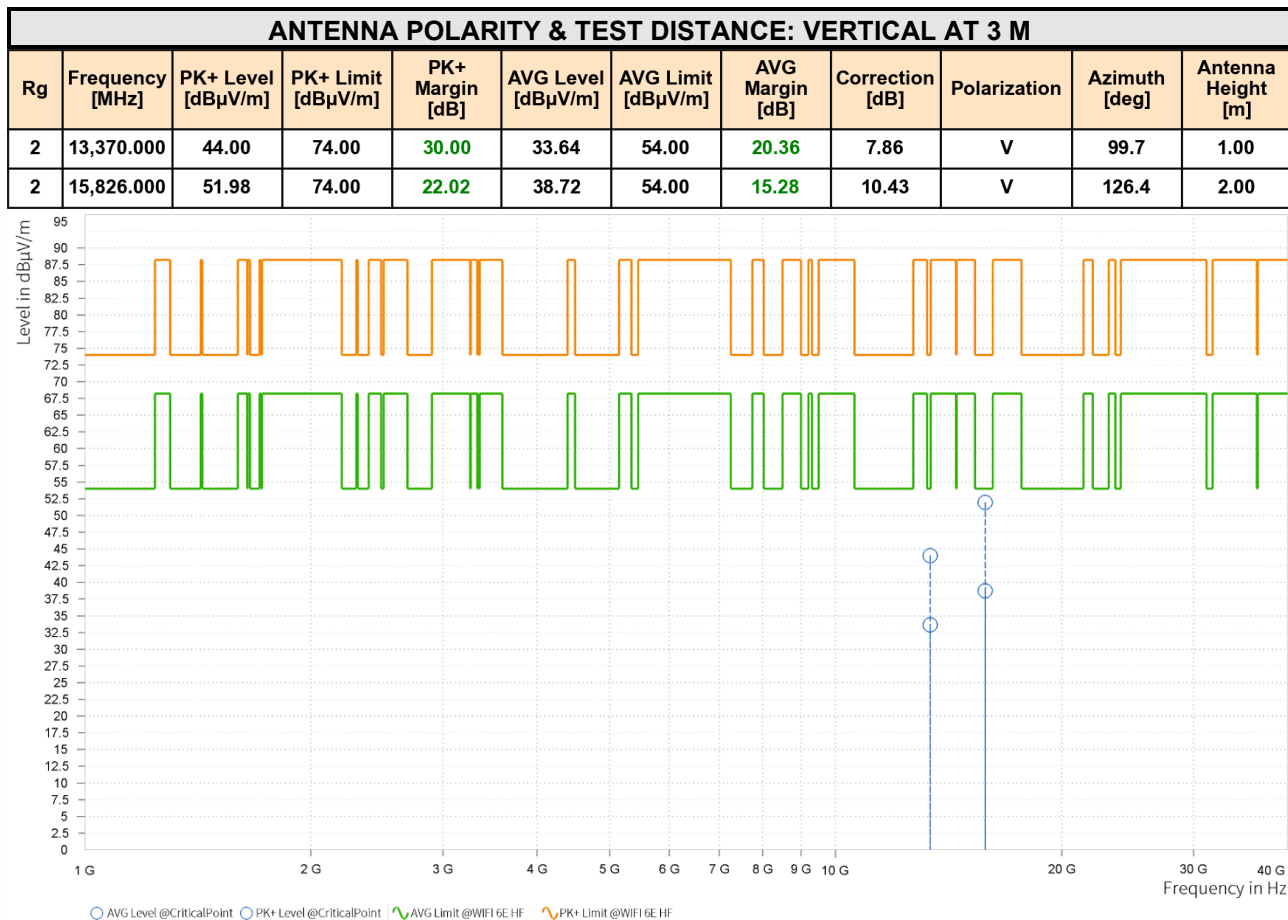

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6165MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




Test Report No.: RF260714B018
802.11be (80MHz)

CHANNEL	TX Channel 103	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	12,930.000	45.90	88.20	42.30	35.35	68.20	32.85	8.11	H	3.6	2.00
2	15,995.500	50.78	74.00	23.22	38.24	54.00	15.76	11.14	H	125.2	2.00

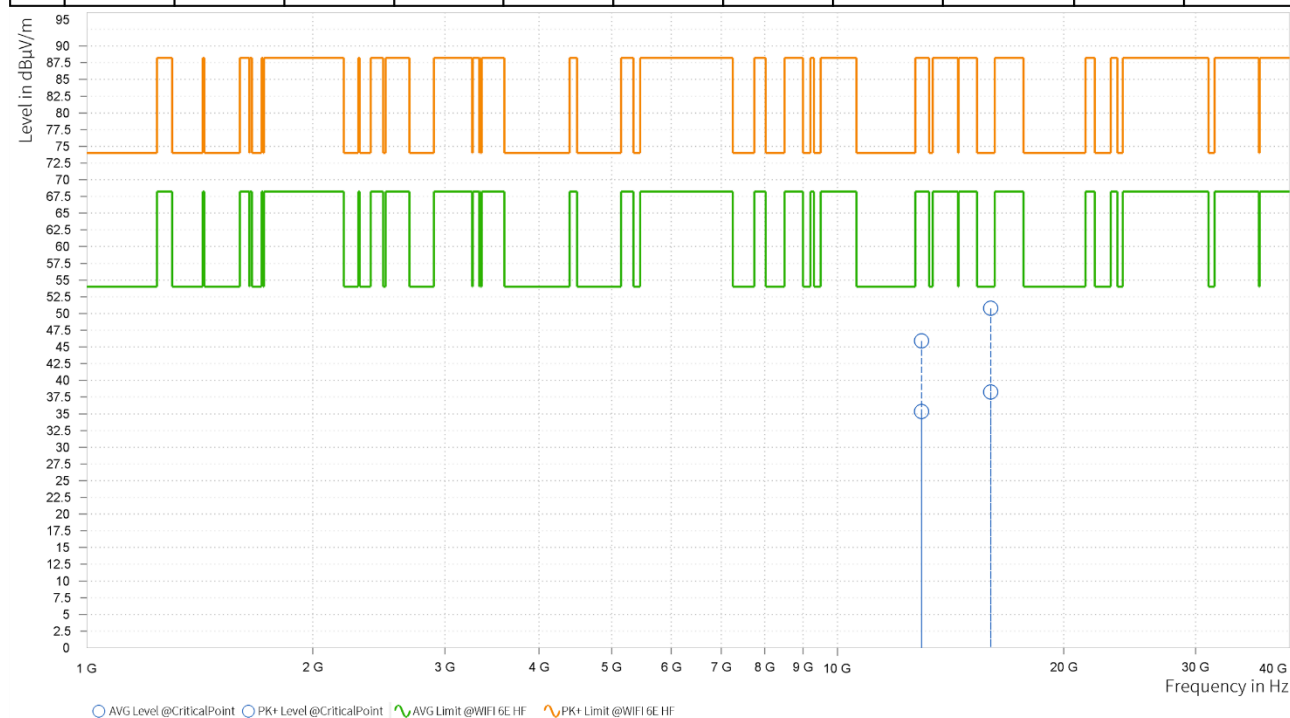

Test Report No.: RF260714B018

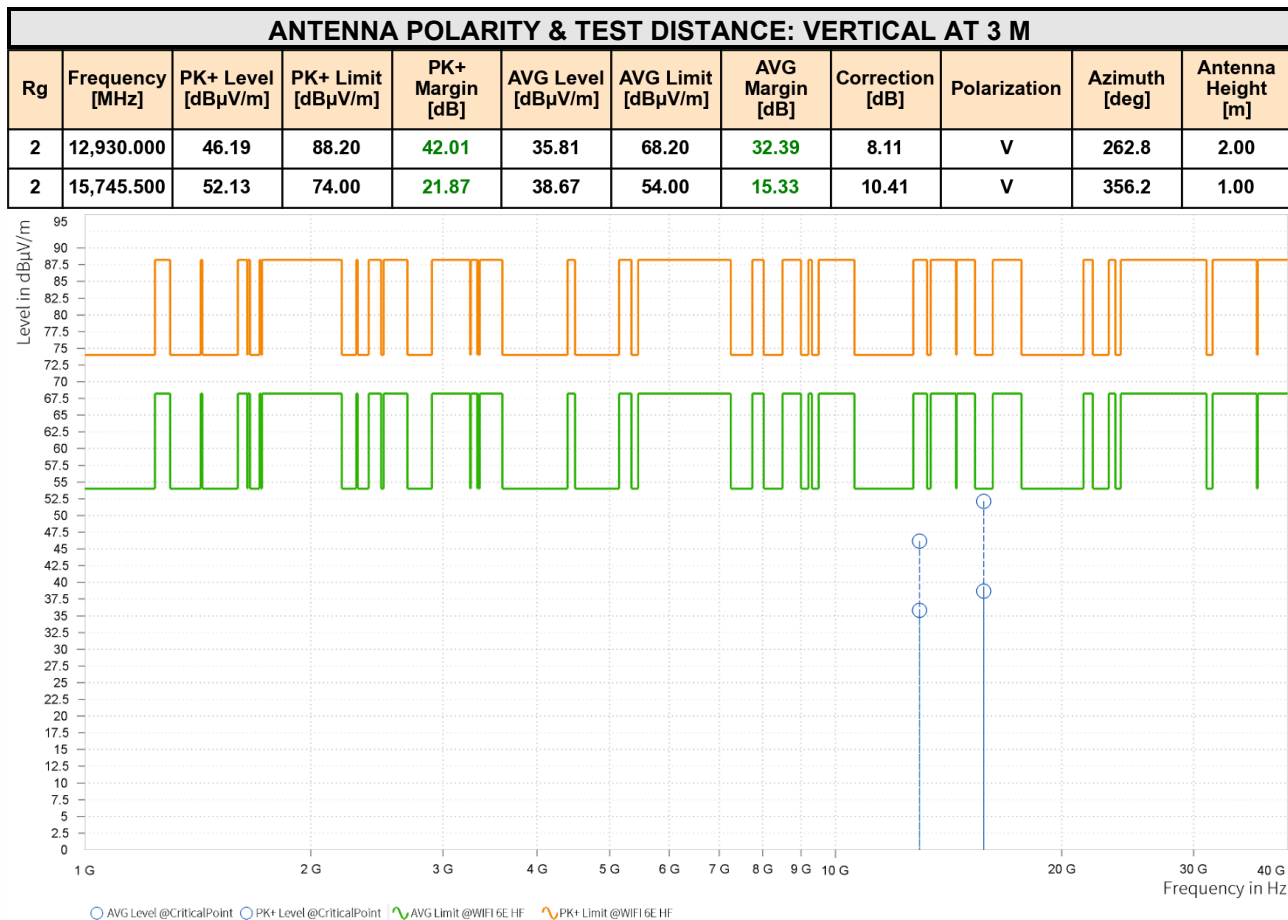

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6965MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




Test Report No.: RF260714B018
802.11be (160MHz)


CHANNEL	TX Channel 111	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,010.000	44.81	88.20	43.39	33.99	68.20	34.21	7.79	H	300.5	1.00
2	15,821.000	51.28	74.00	22.72	38.92	54.00	15.08	10.42	H	2.2	2.00

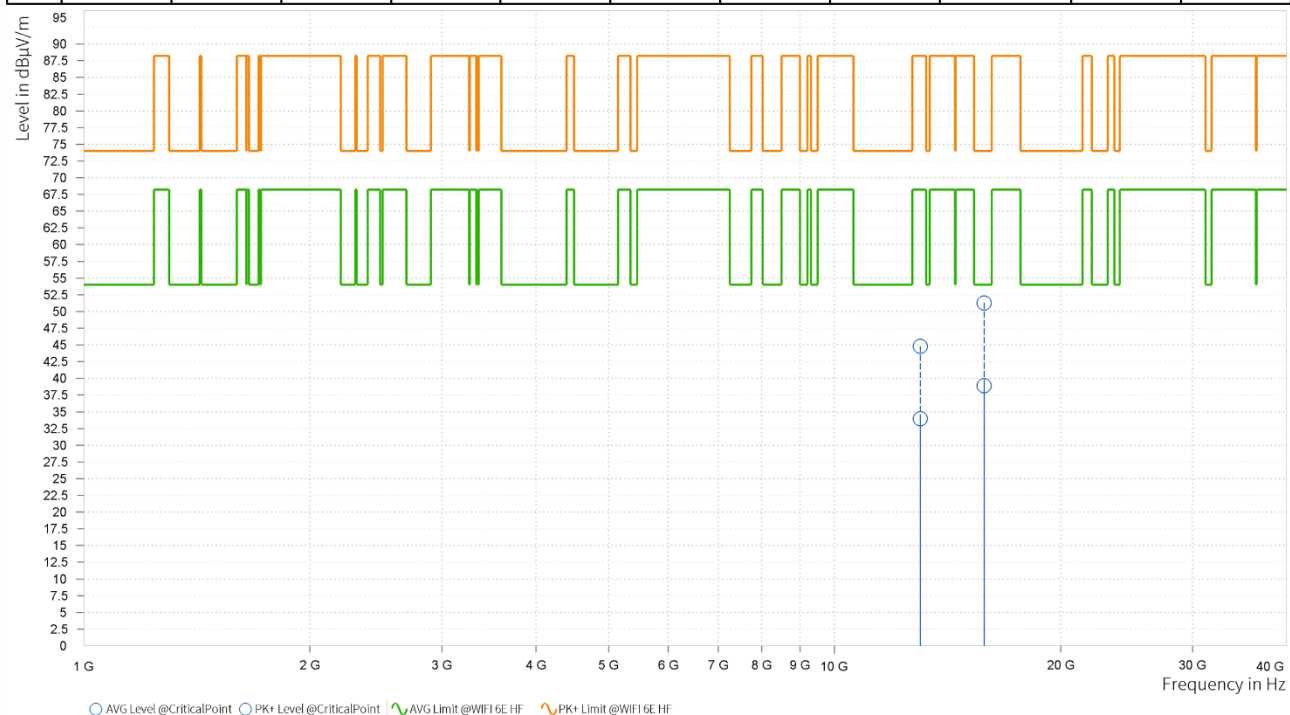

Test Report No.: RF260714B018

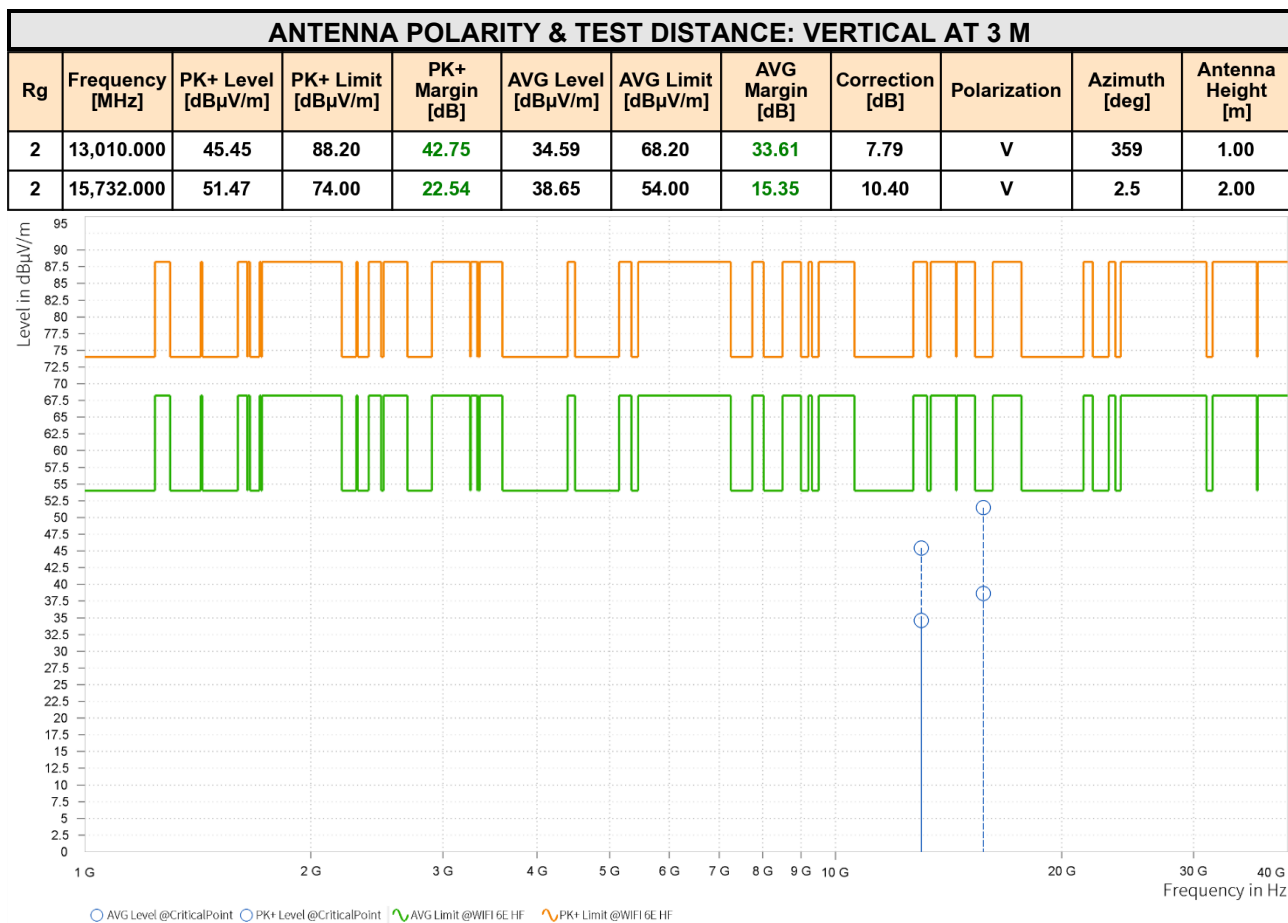

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6965MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




Test Report No.: RF260714B018
802.11be (320MHz)


CHANNEL	TX Channel 127	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,170.000	45.13	88.20	43.07	34.34	68.20	33.86	7.96	H	240.6	1.00
2	15,689.000	50.76	74.00	23.24	38.82	54.00	15.18	10.39	H	359	2.00

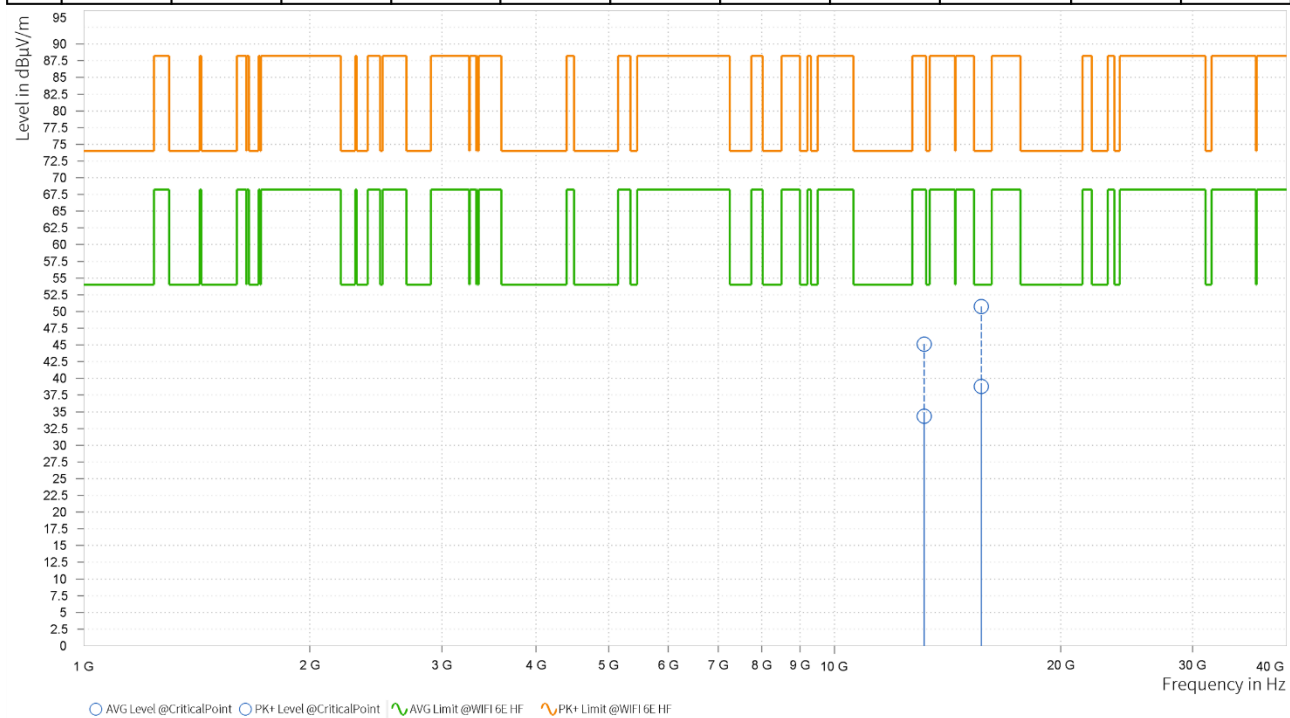

Test Report No.: RF260714B018

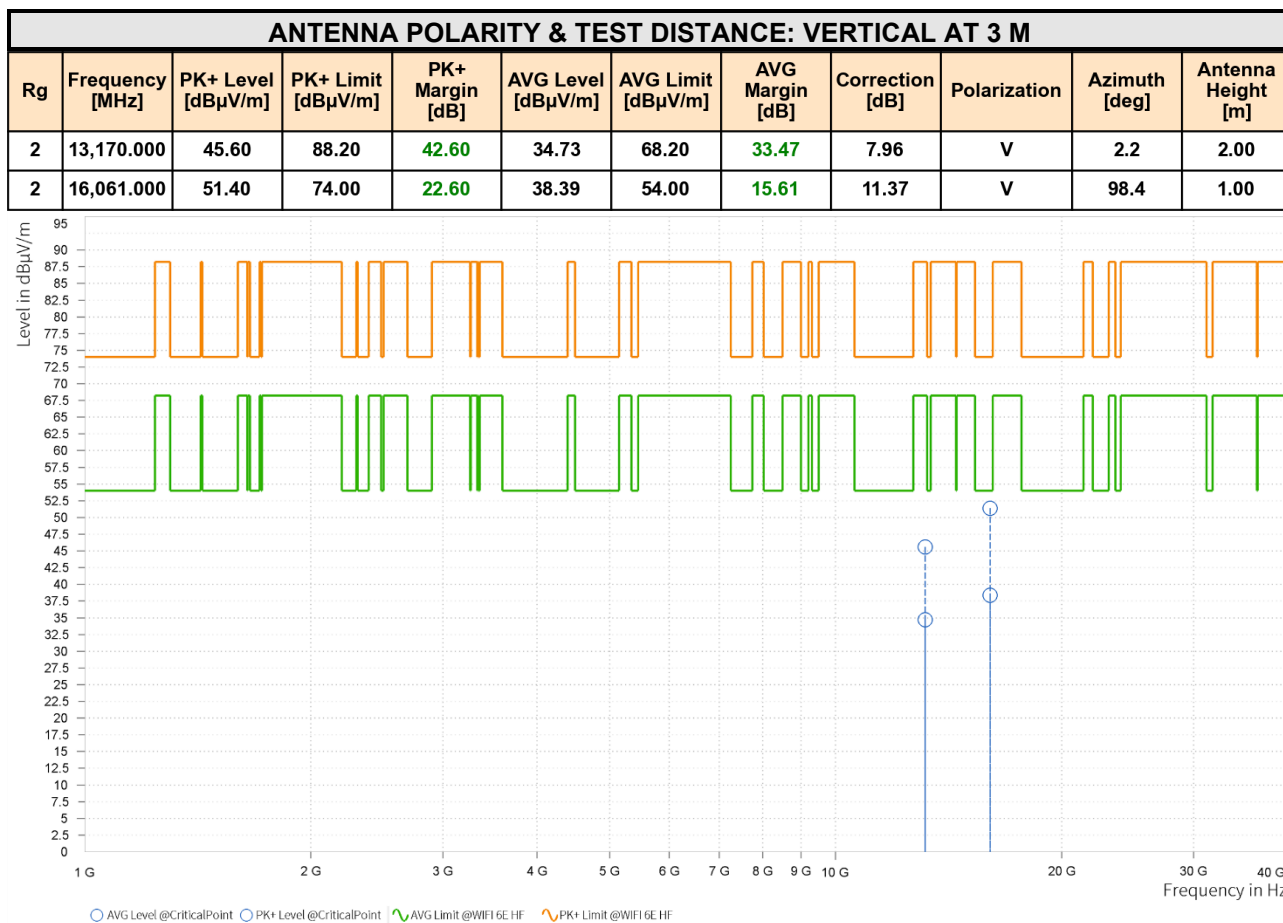

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6965MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



Test Report No.: RF260714B018


WIFI 6E-RU

802.11be (20MHz) (RU53):

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,390.000	43.95	74.00	30.05	33.95	54.00	20.05	7.93	H	99.6	1.00
2	15,854.500	51.20	74.00	22.80	39.02	54.00	14.98	10.47	H	359	2.00

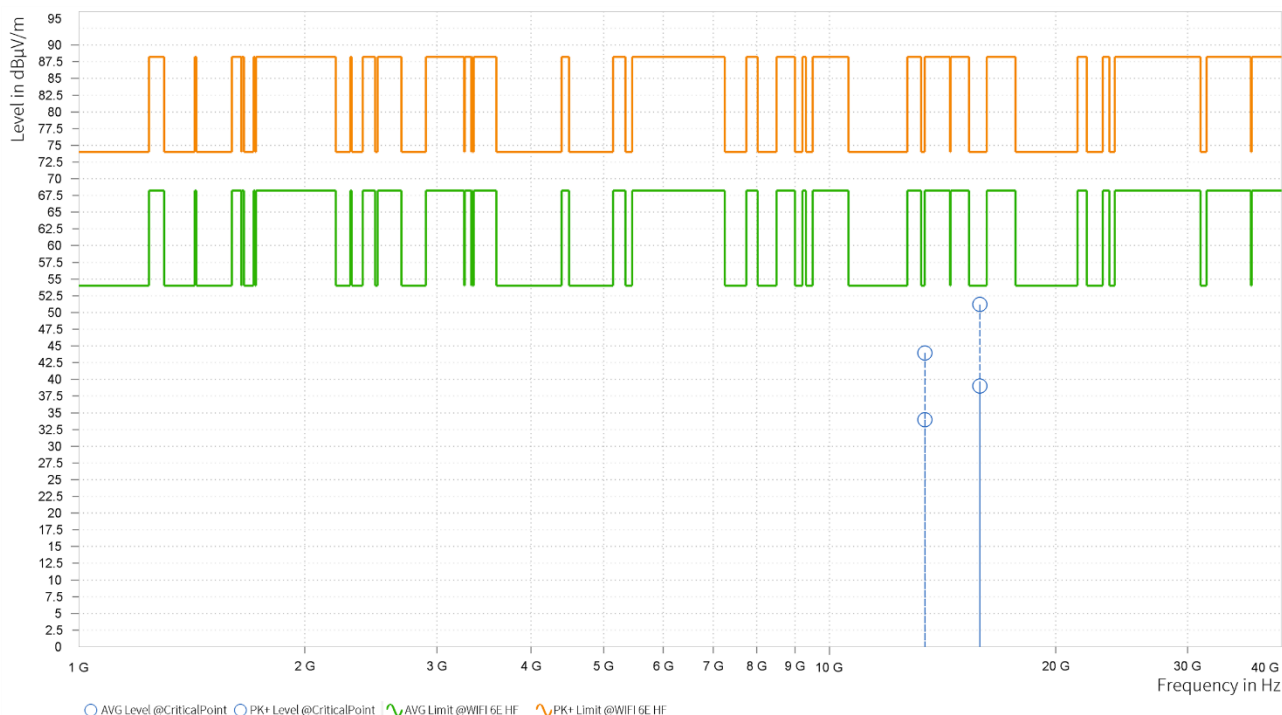

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,390.000	44.23	74.00	29.77	34.11	54.00	19.89	7.93	V	243	1.00
2	15,693.500	50.96	74.00	23.04	38.93	54.00	15.07	10.38	V	0.9	2.00

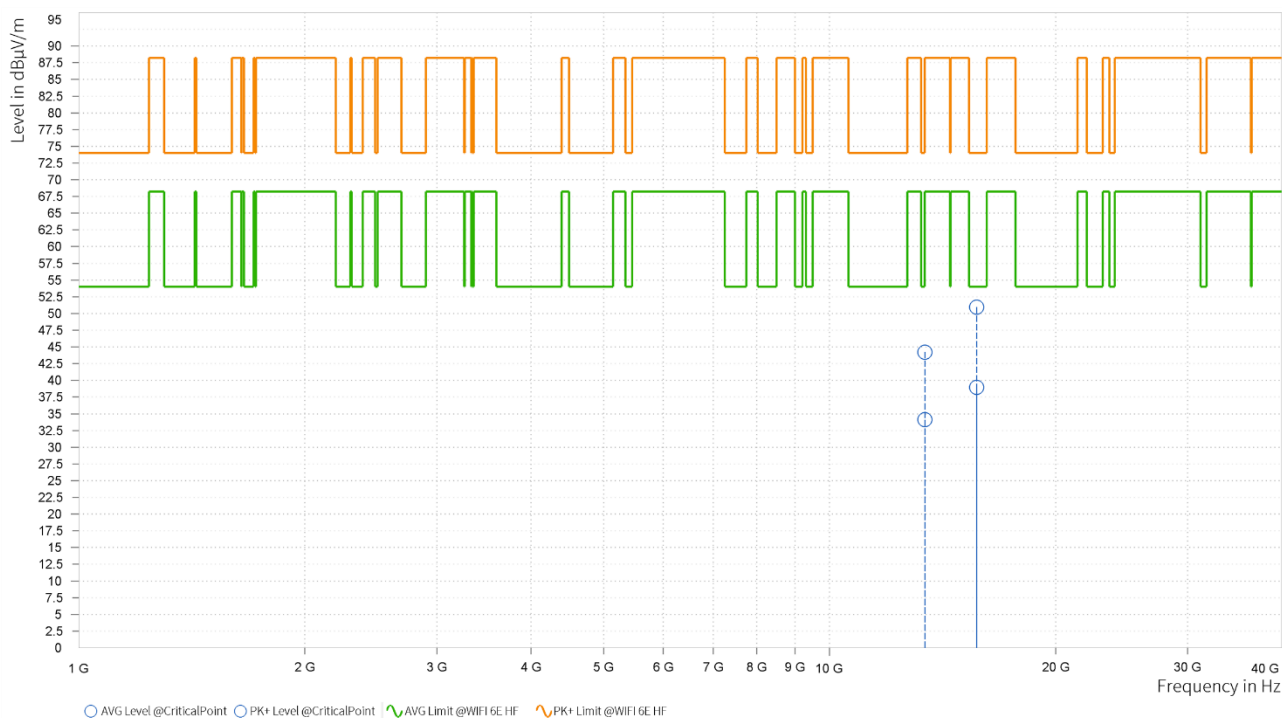

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5955MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




Test Report No.: RF260714B018

802.11be (40MHz) (RU61):


CHANNEL	TX Channel 123	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,130.000	45.41	88.20	42.79	34.45	68.20	33.75	7.92	H	1.9	2.00
2	15,676.500	50.88	74.00	23.12	38.70	54.00	15.30	10.39	H	260.3	2.00

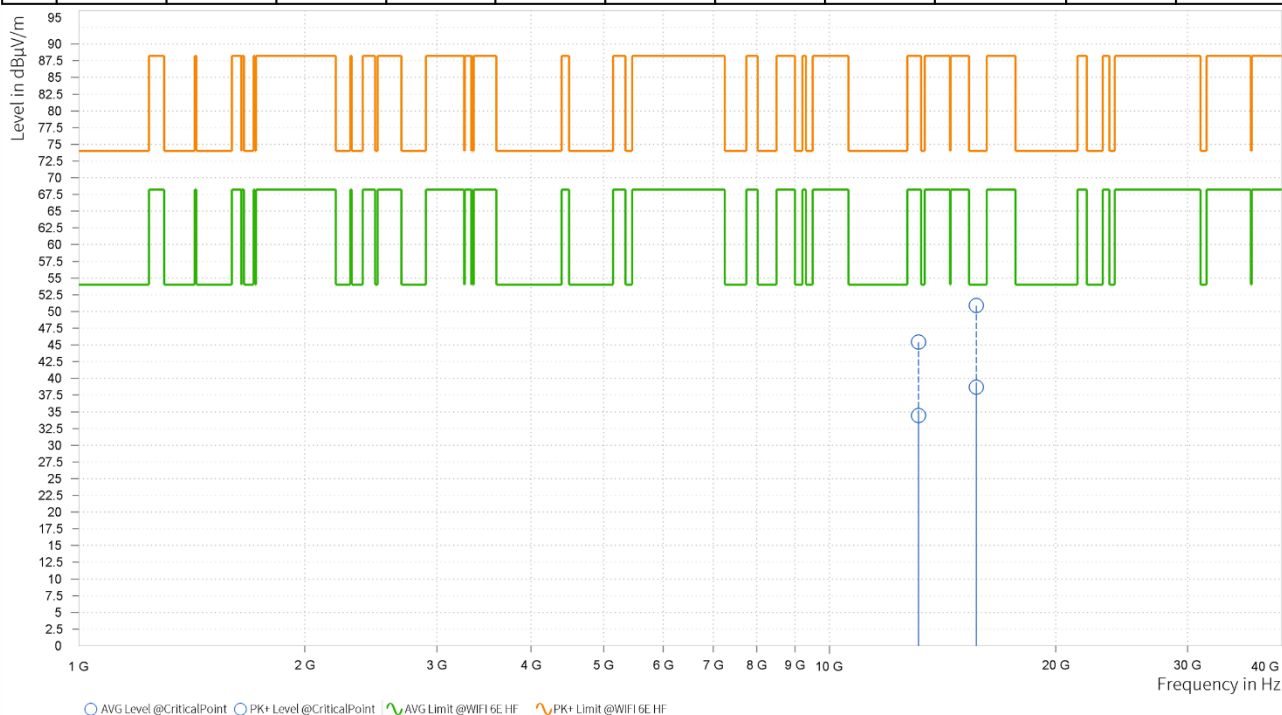

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,130.000	44.76	88.20	43.44	34.61	68.20	33.59	7.92	V	2.2	2.00
2	15,829.000	51.79	74.00	22.21	38.88	54.00	15.12	10.43	V	359.1	1.00

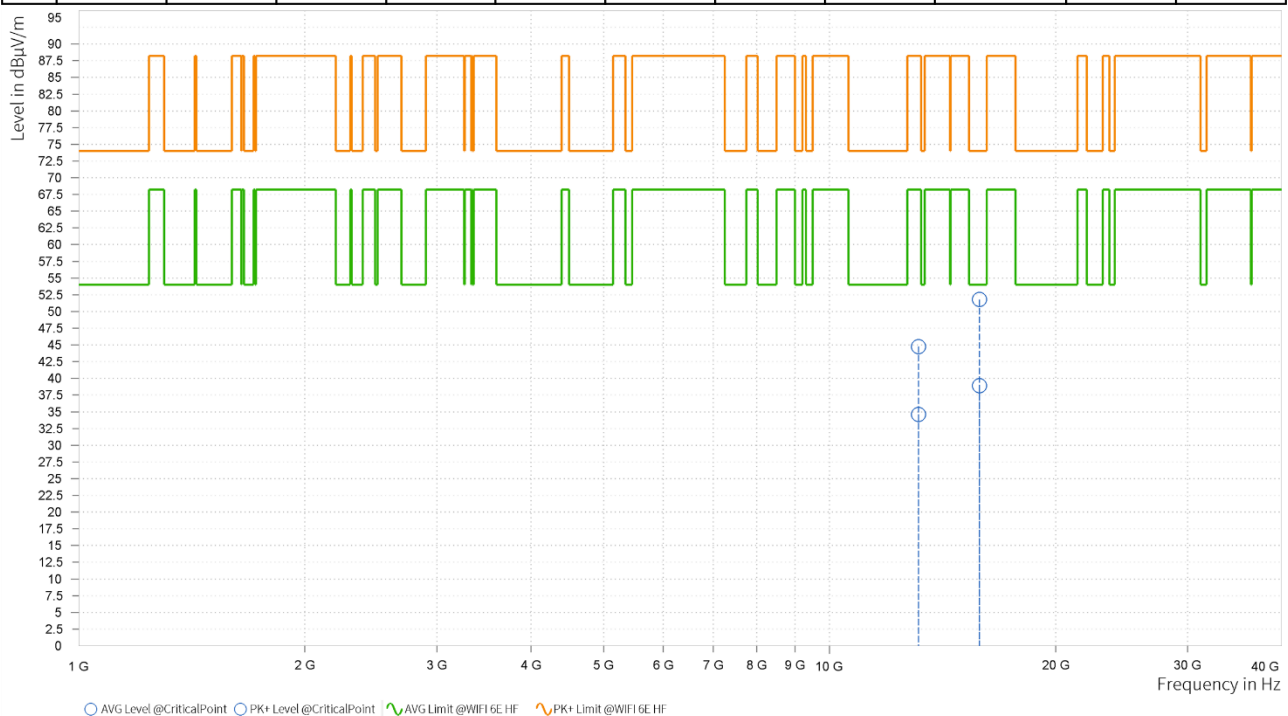

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6175MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




Test Report No.: RF260714B018
802.11be (80MHz) (RU65):

CHANNEL	TX Channel 119	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,090.000	44.50	88.20	43.70	34.18	68.20	34.02	7.88	H	359.1	1.00
2	15,659.500	51.79	74.00	22.21	38.54	54.00	15.46	10.40	H	0.9	2.00

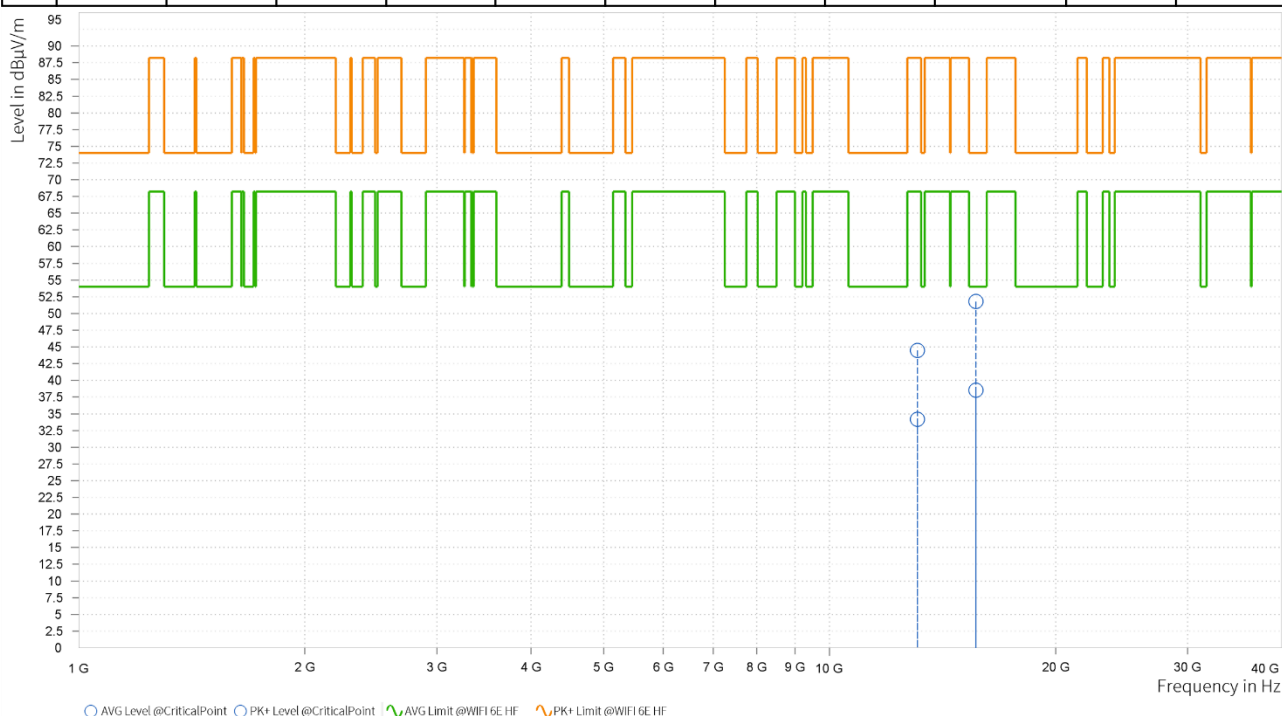

Test Report No.: RF260714B018

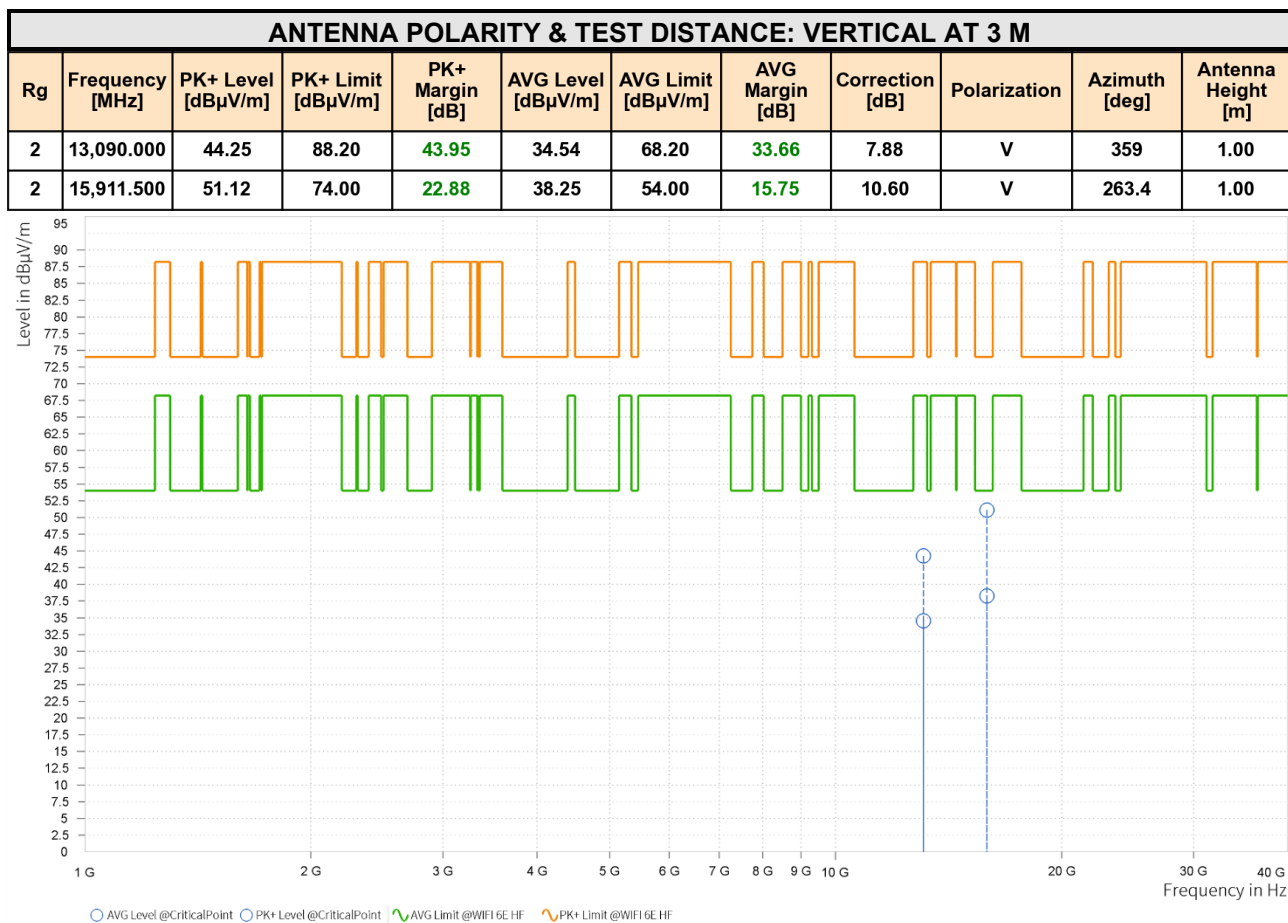

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6175MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




Test Report No.: RF260714B018

802.11be(160MHz) (RU 67):


CHANNEL	TX Channel 143	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,330.000	44.72	74.00	29.28	33.69	54.00	20.31	7.72	H	110.9	2.00
2	15,678.000	51.94	74.00	22.06	38.82	54.00	15.18	10.39	H	1	2.00

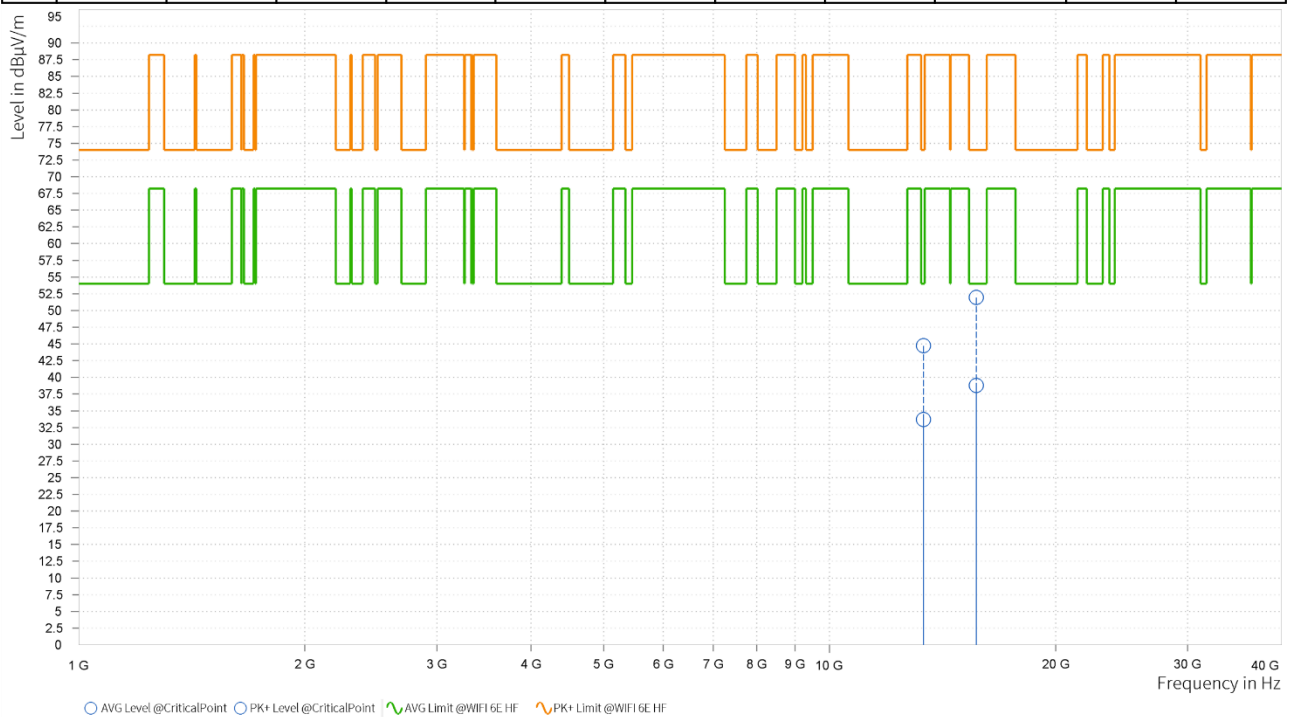

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,330.000	45.25	74.00	28.75	34.17	54.00	19.83	7.72	V	247.8	1.00
2	15,789.500	51.64	74.00	22.36	38.22	54.00	15.78	10.43	V	359	2.00

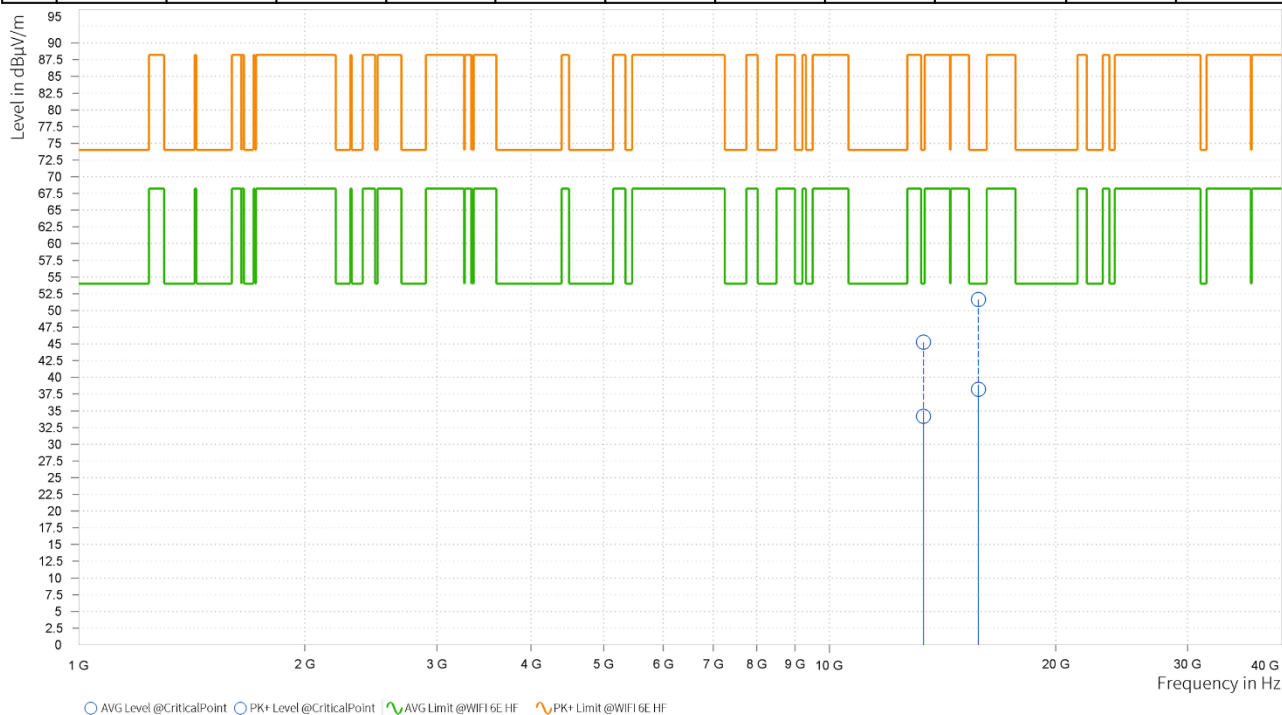

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6175MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



Test Report No.: RF260714B018
802.11be(20MHz) (MRU 106+26):

CHANNEL	TX Channel 105	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	12,950.000	45.84	88.20	42.36	35.15	68.20	33.05	8.01	H	0.9	2.00
2	15,829.500	51.26	74.00	22.74	38.70	54.00	15.30	10.43	H	358.3	1.00

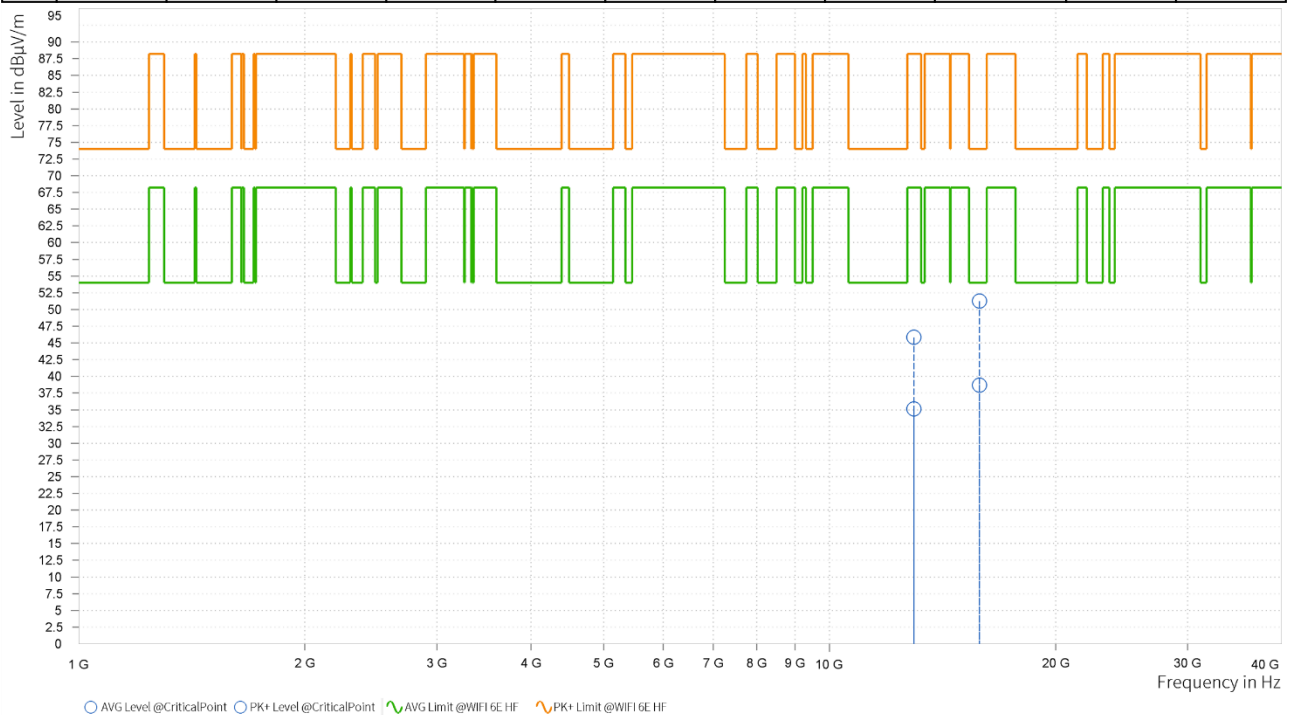

Test Report No.: RF260714B018

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	12,950.000	45.39	88.20	42.81	35.34	68.20	32.86	8.01	V	257.4	1.00
2	15,883.000	51.56	74.00	22.44	38.48	54.00	15.52	10.51	V	105.6	1.00

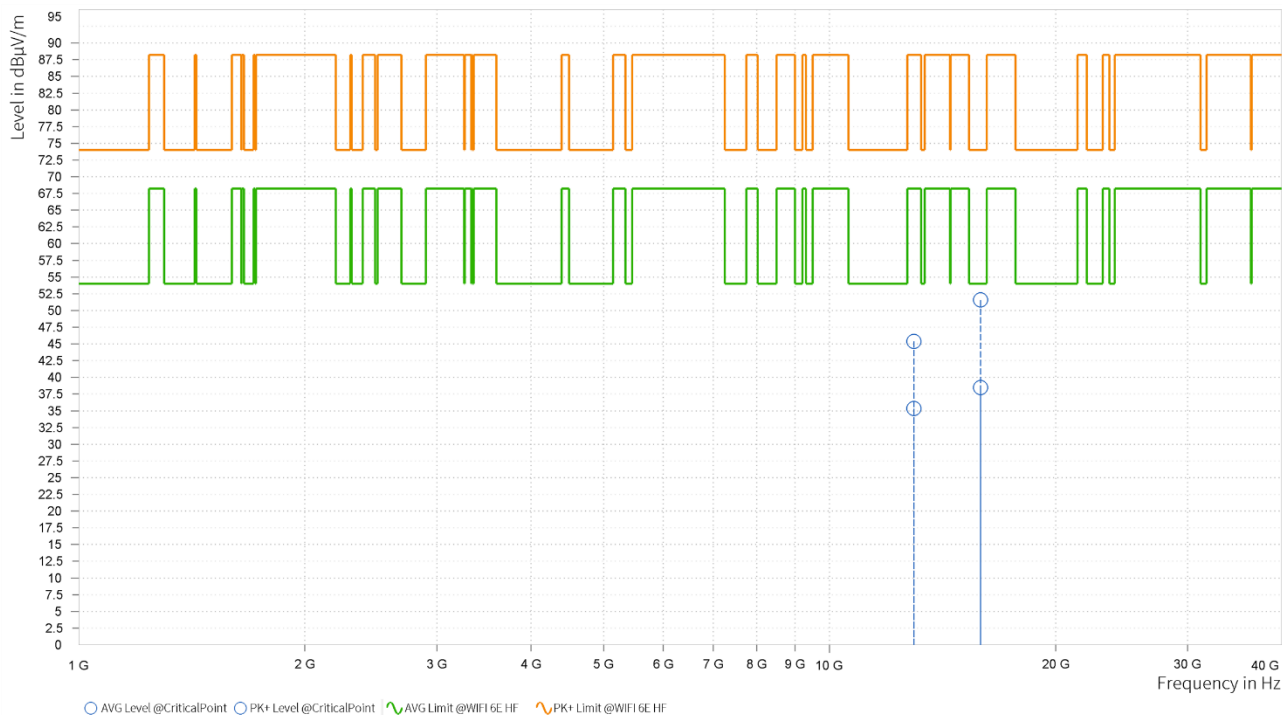

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6175MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



Test Report No.: RF260714B018
802.11be(80MHz) (MRU 484+242):

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,410.000	45.27	88.20	42.93	33.97	68.20	34.23	7.99	H	104.9	2.00
2	15,819.500	51.47	74.00	22.53	38.84	54.00	15.16	10.42	H	104.9	2.00

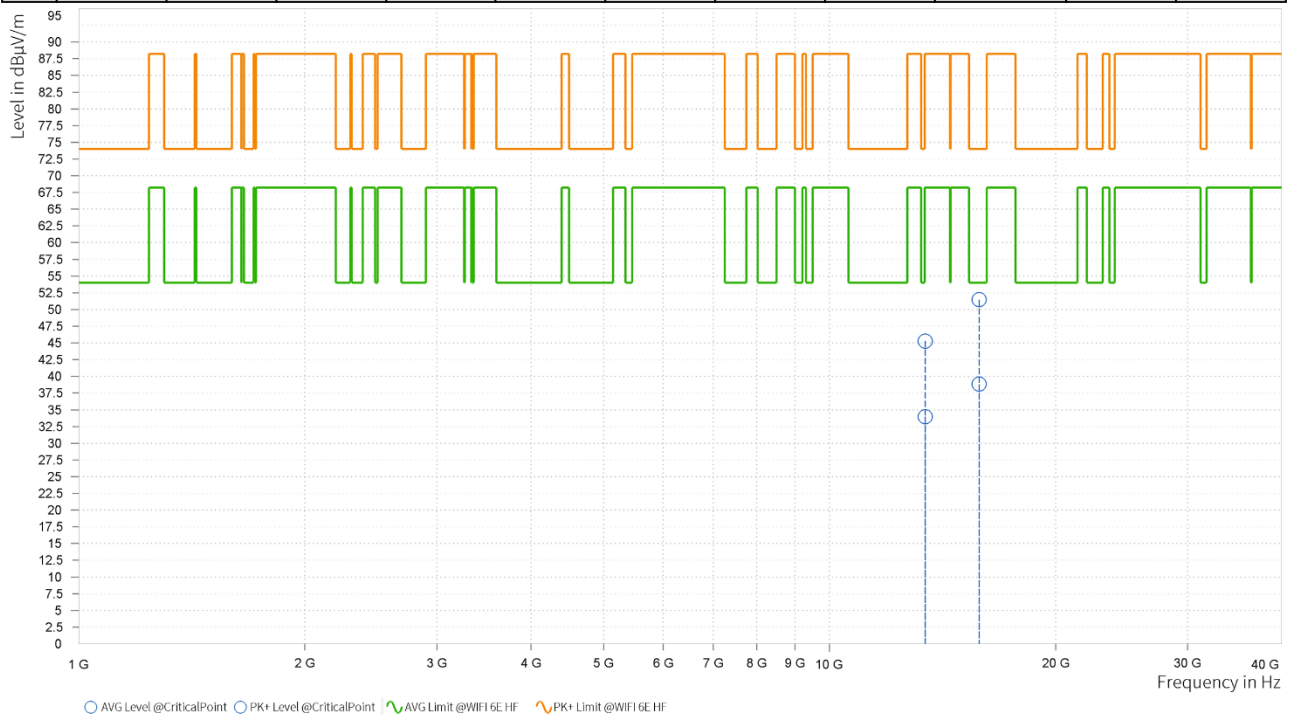

Test Report No.: RF260714B018

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,410.000	45.03	88.20	43.17	34.02	68.20	34.18	7.99	V	359	1.00
2	15,749.500	51.66	74.00	22.34	38.71	54.00	15.29	10.41	V	261.5	2.00

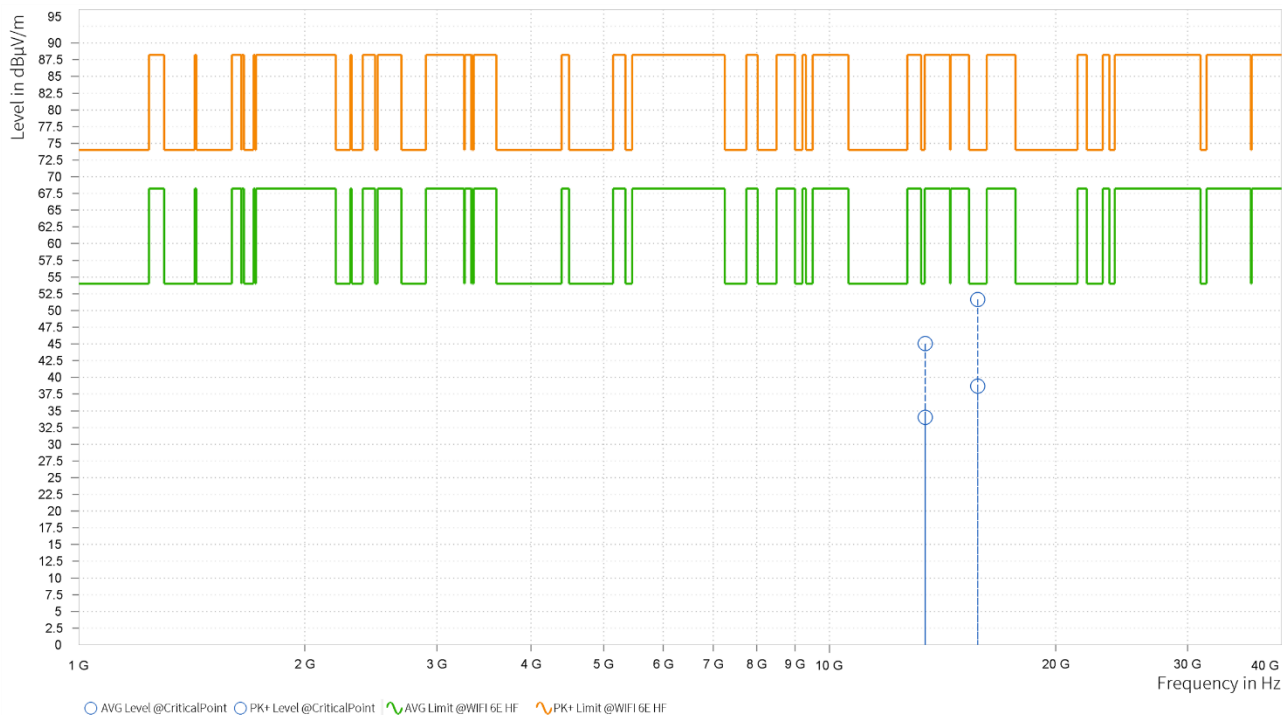

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6175MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




Test Report No.: RF260714B018
802.11be(160MHz) (MRU 996+484):

CHANNEL	TX Channel 143	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,330.000	45.22	74.00	28.78	33.68	54.00	20.32	7.72	H	0.9	2.00
2	15,873.500	51.01	74.00	22.99	38.71	54.00	15.29	10.49	H	1.3	2.00

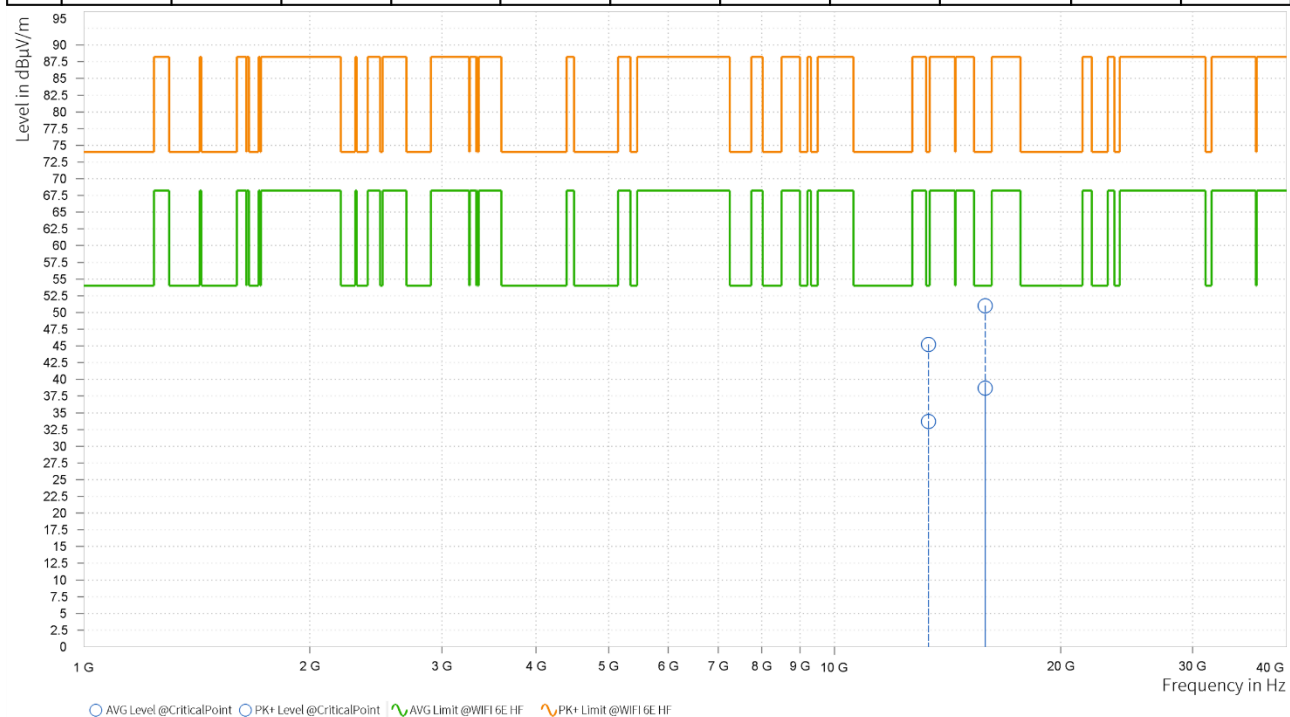

Test Report No.: RF260714B018

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	13,330.000	44.50	74.00	29.50	34.06	54.00	19.94	7.72	V	260.4	2.00
2	15,865.500	50.94	74.00	23.06	38.86	54.00	15.14	10.48	V	303.9	1.00

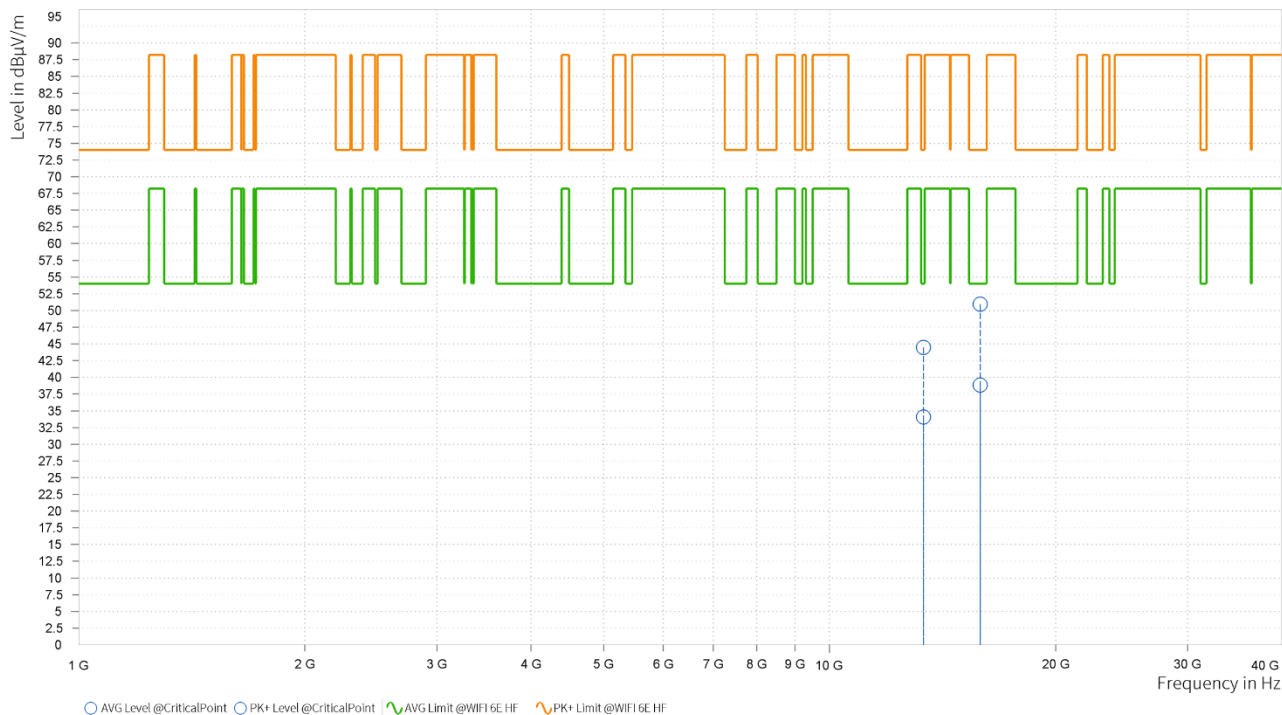

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 6175MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.