


Notes:

- Printing color: Pantone Cool Grey 10C
- All font: Google Sans Medium, input 4.5pt, output: 1.1mm.
All 1D barcode: code 128(code A, Space correction: 1),
height: 3mm.
- FCC ID, Input, GFiber Model Number, GPN fixed.
- FCC ID: VW3FAST380BA provide by Sagemcom.
- MAC: AB:CD:EF:00:00:01, total 12 digits.
- Assembled in Vietnam
- Factory ID: FY provided by Sagemcom
- Serial Number: PPPMMYYWWSSSSS
Length of the Product Serial Number is 15 characters.
PPP: 3 character product type, FAST380BA=E02, fixed
1st P = R for RG and E for EXT, PP = Vendor to use this in increments (Base 25).
MMM: 3 character manufacturer ID; MMM = 561, fixed
MM = 56 for SGC and The third M to uniquely identify the factory location use 1 (Vietnam)
(base 25).
YY: 2 character year; decimal [0-9], eg: 24 for Year 2024
WW: 2 character work week; decimal [0-9]; eg.27 for week #27 of the year
SSSSS: 5 character unit serial; from 00001, Base 25
The base-25 system is a numeral system with 25 as its base. The symbols used in
this system are 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F, G, H, I, J, K, L, M, N and O.
This counter is reset every week.
- GFiber URL QR code Content: (the content is variable)
<https://google.com/fiber/registerdevice?sn=E02561244200001&mac=D4351DC7E490&mo=GEBE320S&gpn=1183662-01>
QR code size: 14.4*14.4 +/-0.5mm ECC: Q, Model: 2, start mode: AUTO
Element width(dots): 7 (printer 600dpi)


REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
00	NA	NA	2024.01.10	First Release	Zhou Cun
3.0	NA	NA	2024.03.20	update Google Fiber logo and remove Wi-Fi7 EXT	Zhou Cun
4.0	NA	NA	2024.04.16	update GFiber logo and SN define	Zhou Cun
5.0	NA	NA	2024.04.24	update QR code content	Zhou Cun
6.0	NA	NA	2024.07.31	update address	Zhou Cun
7.0	NA	NA	2024.09.02	update WiFi7 logo and QR code setting	Zhou Cun



scale: 1:1

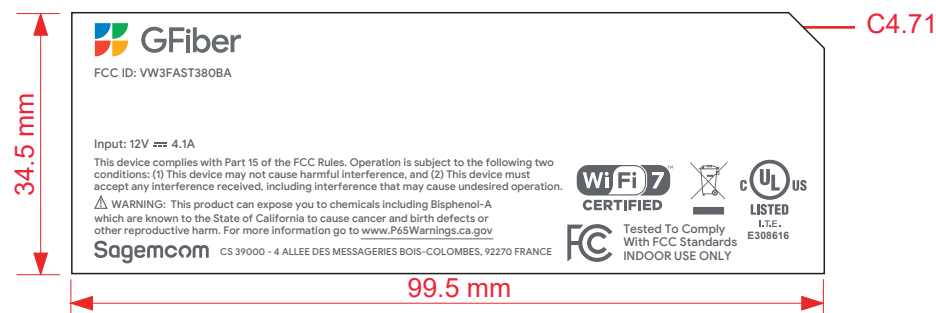

vendor supply

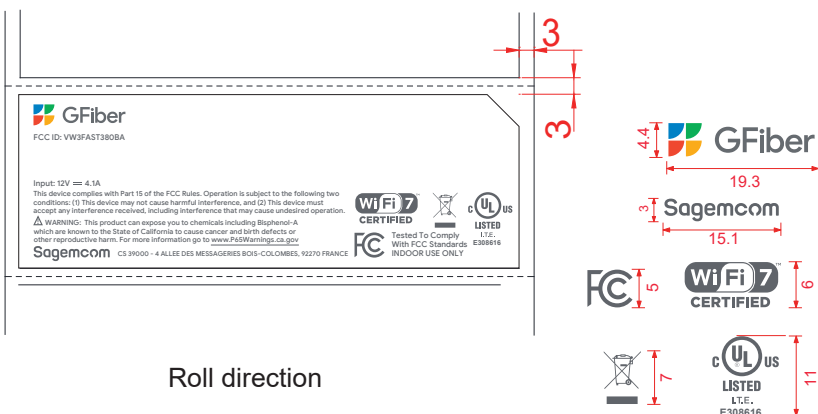

Roll direction

MATERIAL (SPEC.):				SCALE		 Foxconn Industrial Internet 富士康工业互联网	
50# embossing Mylar+25# matte PP				1:1			
FINISH:				SHEET		PART NAME	
				1/1			
DIM. TOLERANCES		WARPAGE		UNIT		device label	
				mm			
DIM.		TOL.		SIZE		MODEL	
0~6		±0.05		A4		F06H006.00	
6~30		±0.10				PART NO.	
30~120		±0.15				500.02857.015	
120~300		±0.20				CUSTOMER MODEL	
300~		±0.25				CUSTOMER PART NO.	
CRITICAL DIM. MARK		"※"				APPROVED	
				FAST380BA			