

FCC Appendix RF Test Data for BLE

FCC ID : **WWE-2IHSK1031**

Company : **LIFEWORCS TECHNOLOGY GROUP LLC.**

EUT : **ECLIPSE SPEAKER WITH LED LIGHT**

Model Number : **2IHSK1013**

Report No. : **CTA26062201601**


Reviewed By : **Eric Wang**

Duty Cycle


Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
BLE 1M	2402	0.384	0.625	61.44	2.12	2.6
BLE 1M	2440	0.385	0.625	61.6	2.1	2.6
BLE 1M	2480	0.385	0.625	61.6	2.1	2.6

Test Graphs


Duty Cycle NVNT BLE 1M 2402MHz

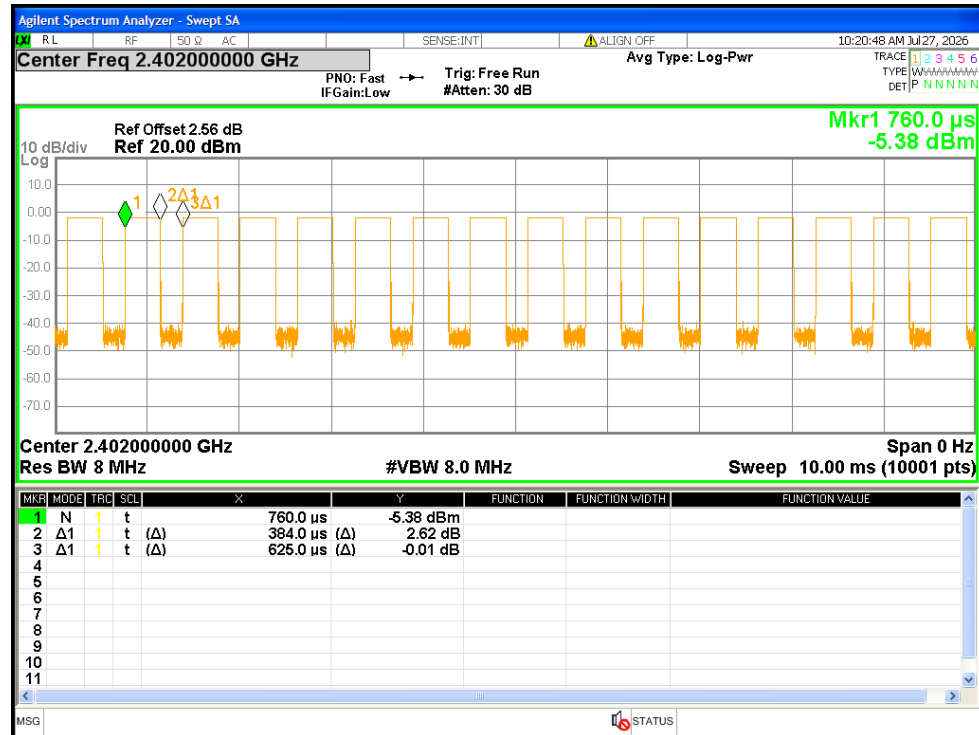

Duty Cycle NVNT BLE 1M 2440MHz

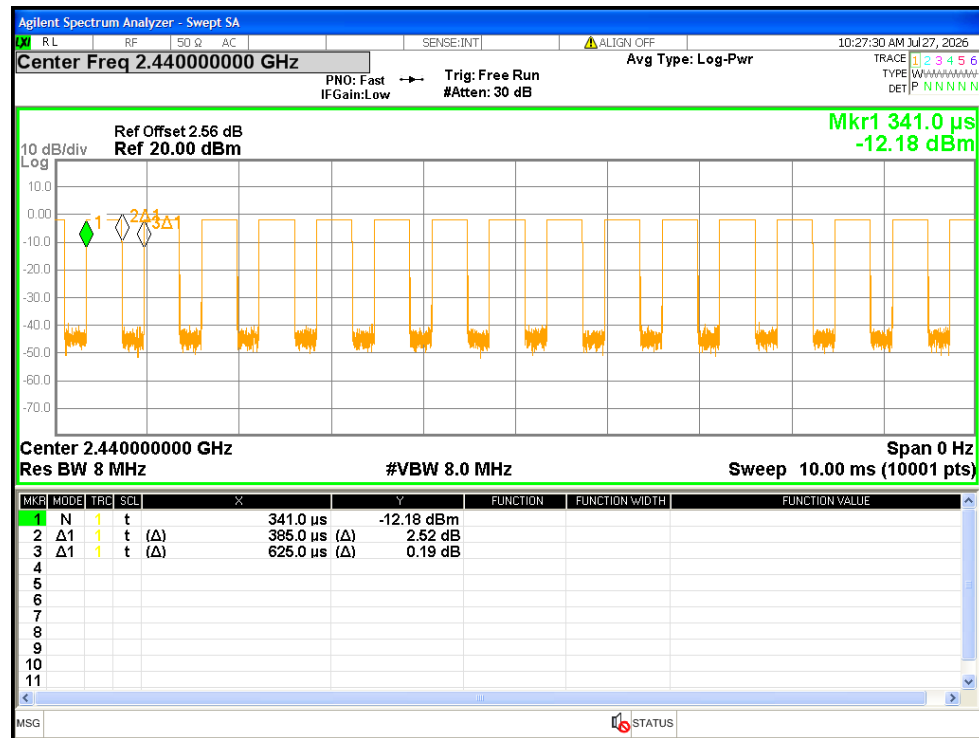

Duty Cycle NVNT BLE 1M 2480MHz

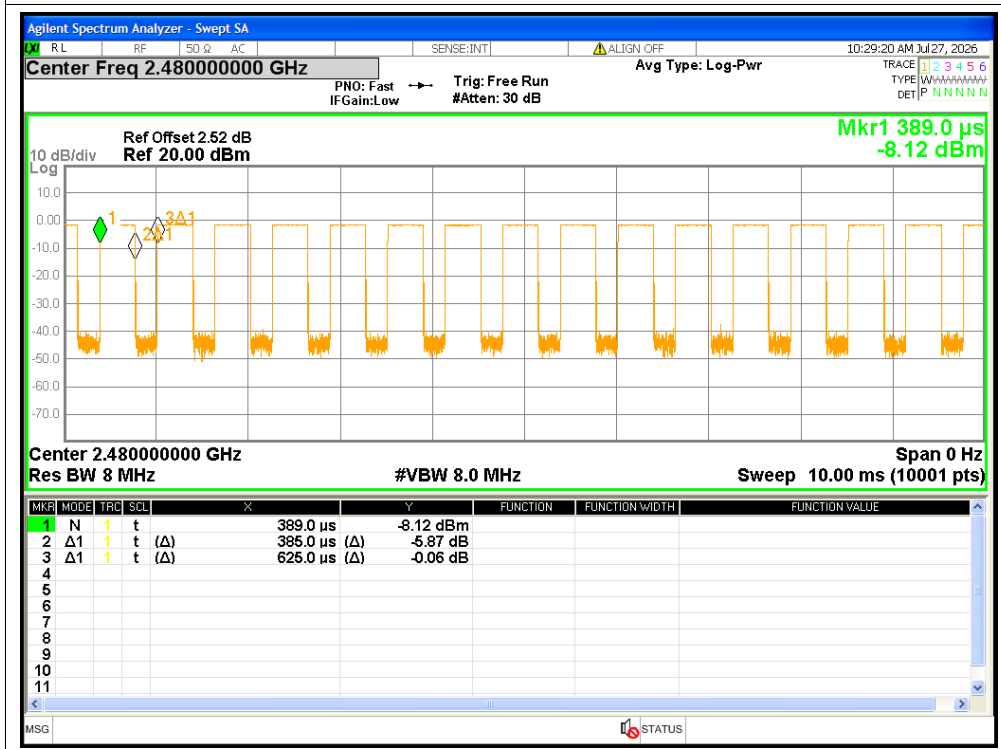

Maximum Peak Conducted Output Power


Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	-1.89	<=30	Pass
BLE 1M	2440	-1.9	<=30	Pass
BLE 1M	2480	-1.67	<=30	Pass

-6dB Bandwidth


Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	0.6692	≥ 0.5	Pass
BLE 1M	2440	0.6884	≥ 0.5	Pass
BLE 1M	2480	0.6969	≥ 0.5	Pass

Test Graphs


-6dB Bandwidth NVNT BLE 1M 2402MHz

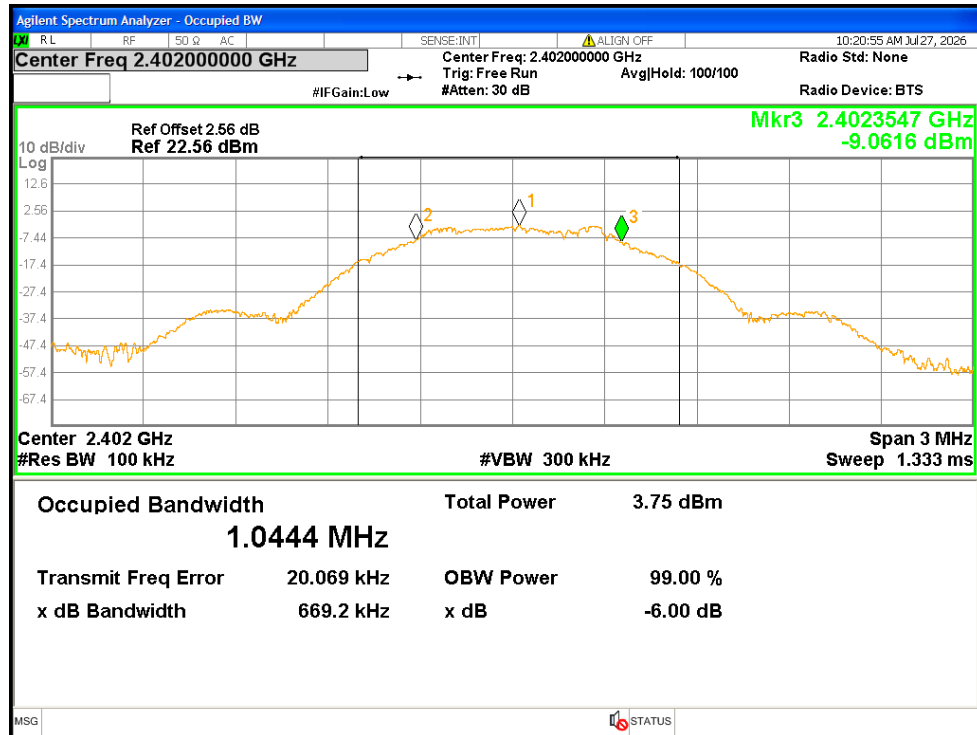

-6dB Bandwidth NVNT BLE 1M 2440MHz

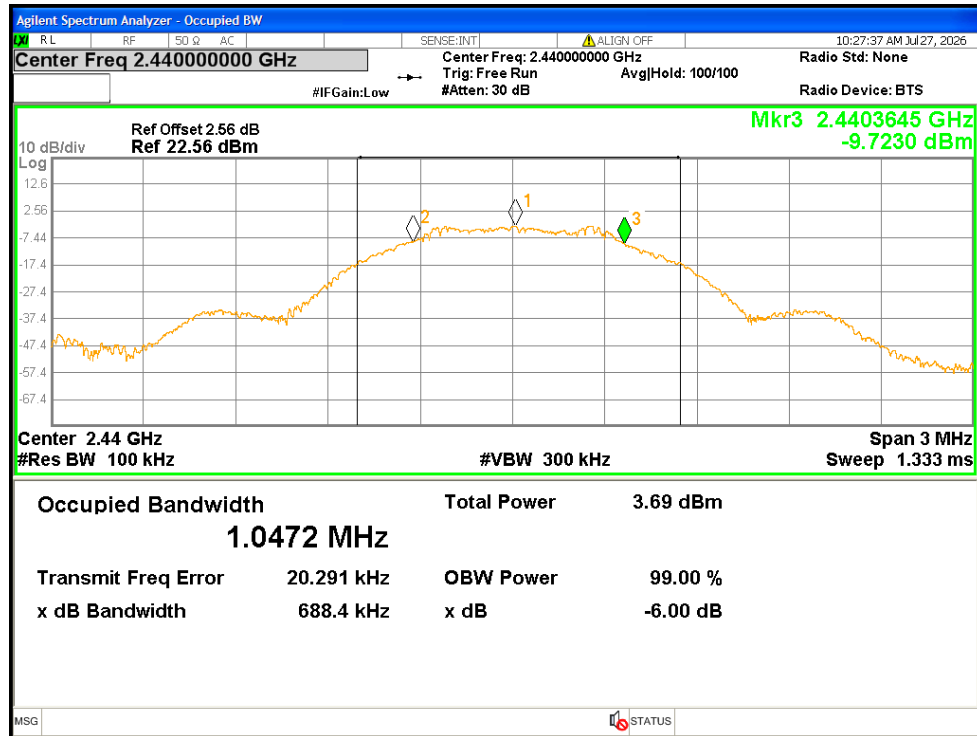

-6dB Bandwidth NVNT BLE 1M 2480MHz

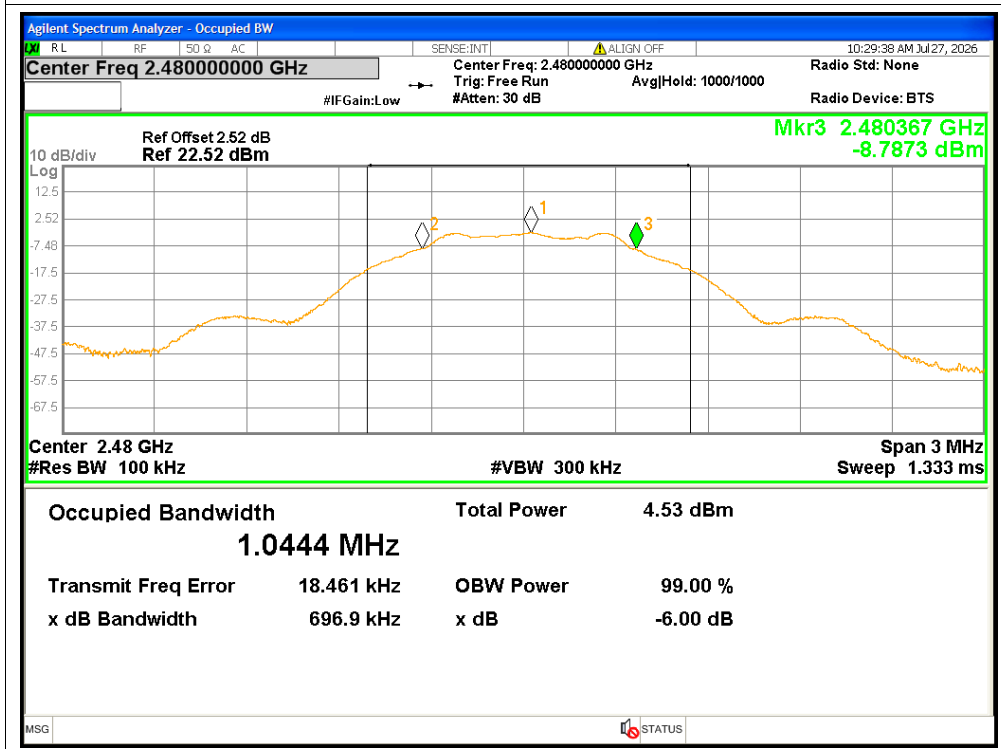


Maximum Power Spectral Density Level


Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	-16.76	<=8	Pass
BLE 1M	2440	-16.95	<=8	Pass
BLE 1M	2480	-16.59	<=8	Pass

Test Graphs


PSD NVNT BLE 1M 2402MHz

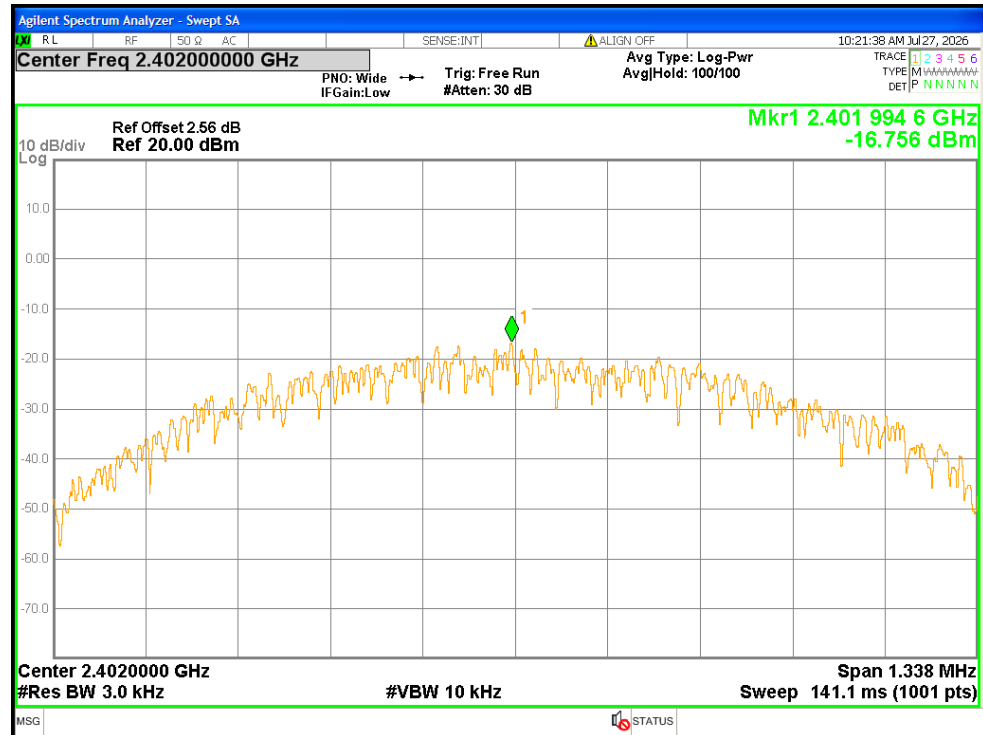

PSD NVNT BLE 1M 2440MHz

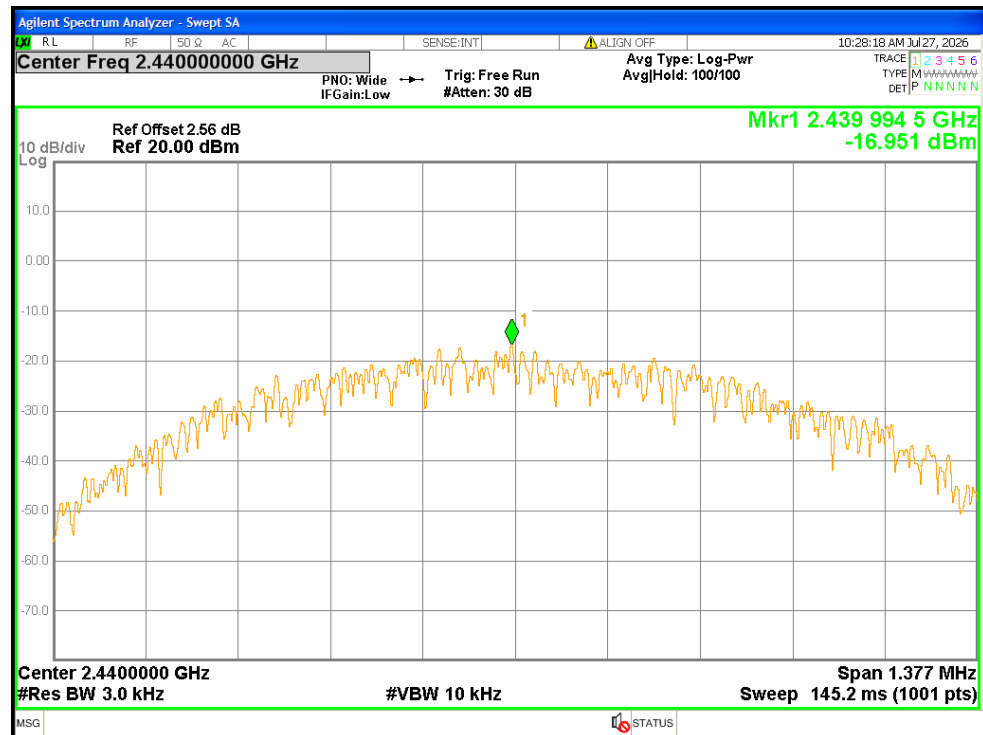

PSD NVNT BLE 1M 2480MHz

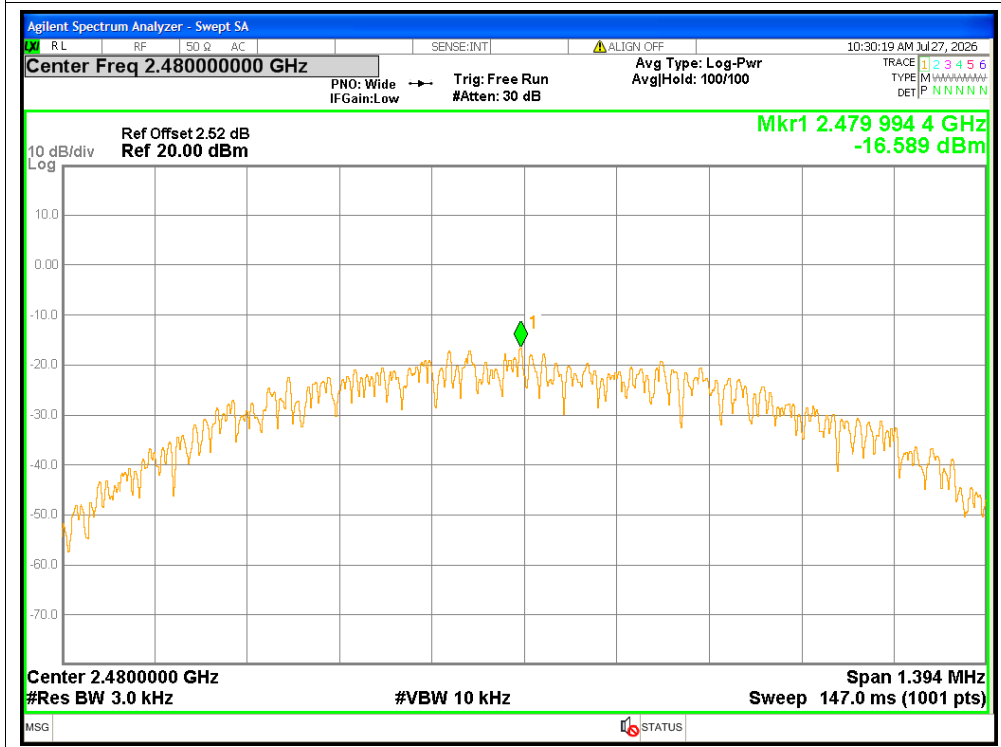


Band Edge


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-47.33	<=-20	Pass
BLE 1M	2480	-45.49	<=-20	Pass

Test Graphs


Band Edge NVNT BLE 1M 2402MHz Ref

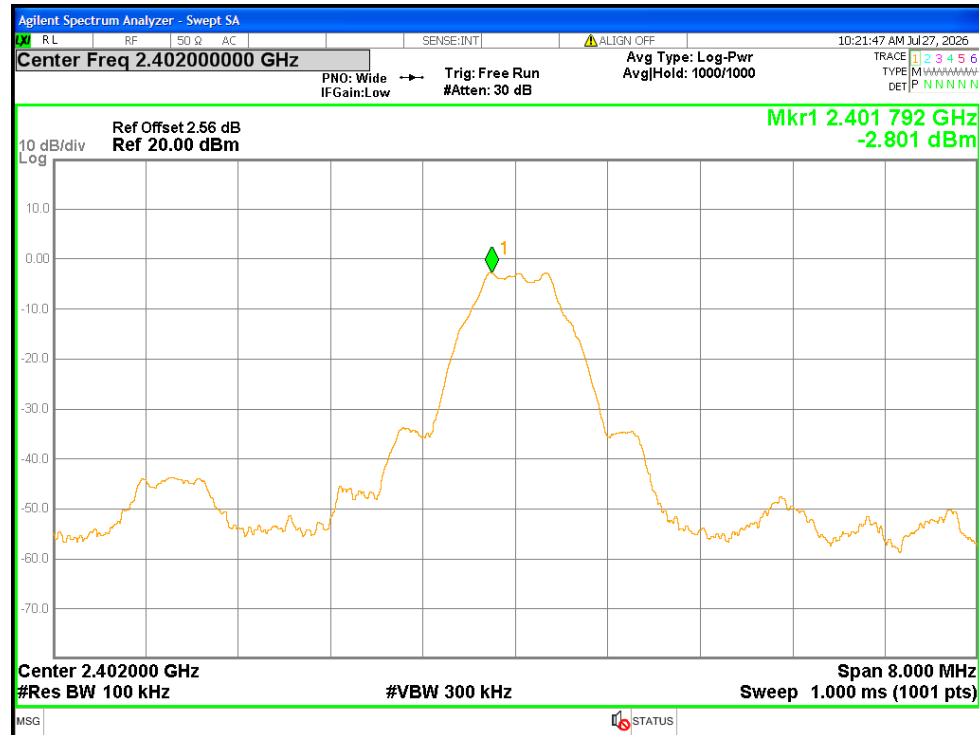


Band Edge NVNT BLE 1M 2402MHz Emission

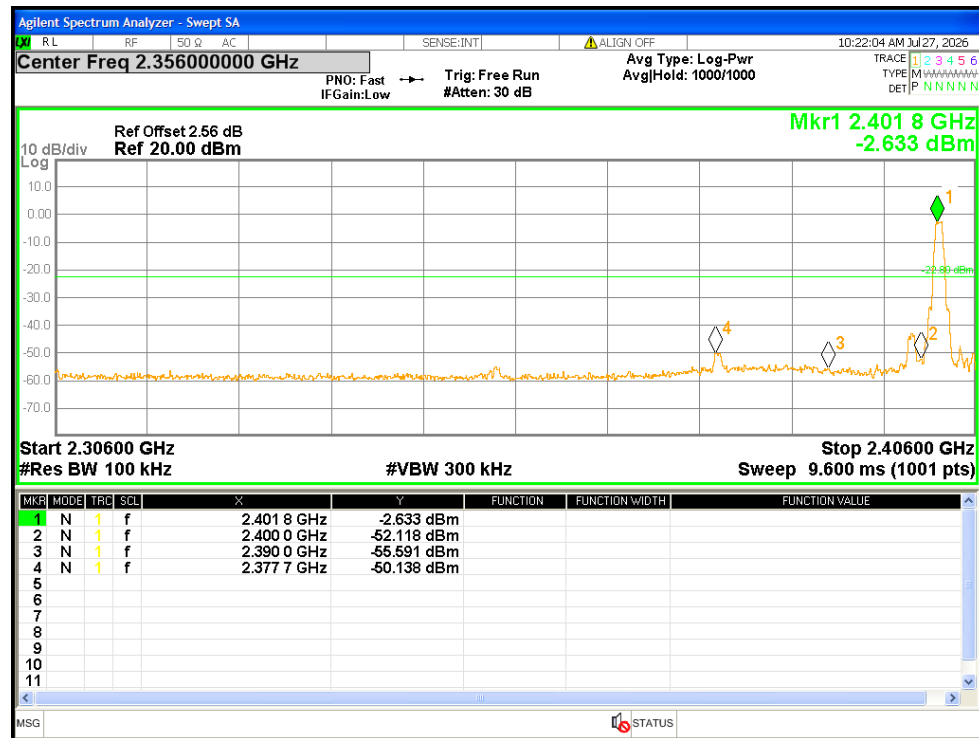

Band Edge NVNT BLE 1M 2480MHz Ref

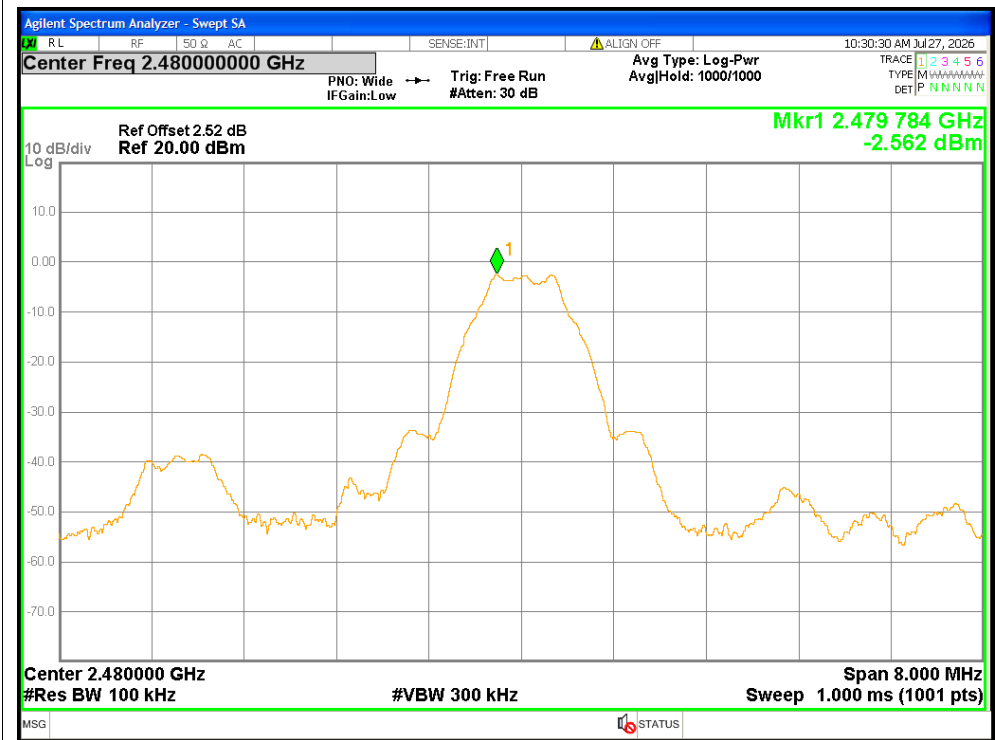

Band Edge NVNT BLE 1M 2480MHz Emission

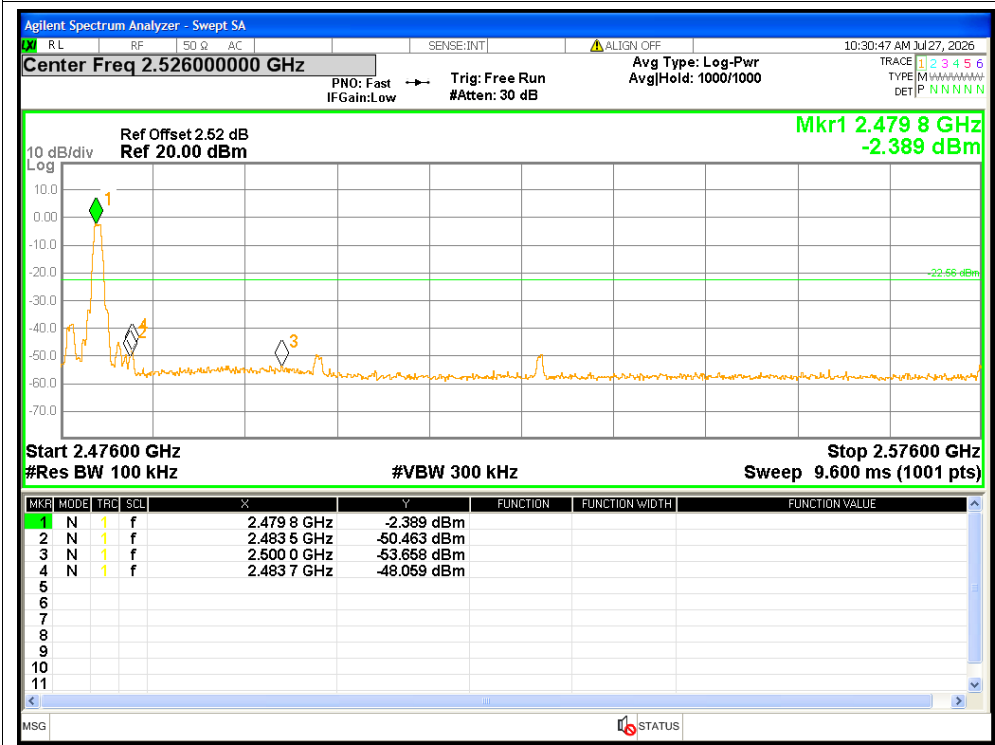

Conducted RF Spurious Emission


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-37.08	<=-20	Pass
BLE 1M	2440	-37.54	<=-20	Pass
BLE 1M	2480	-38.1	<=-20	Pass

Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ref




Tx. Spurious NVNT BLE 1M 2402MHz Emission

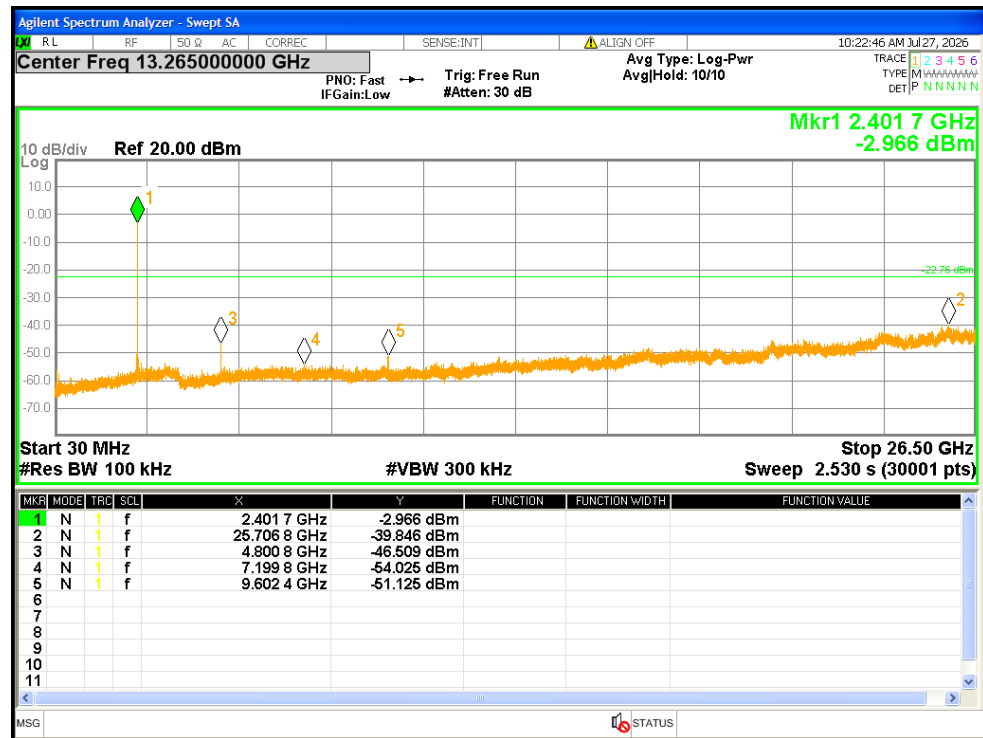

Tx. Spurious NVNT BLE 1M 2440MHz Ref




Tx. Spurious NVNT BLE 1M 2440MHz Emission

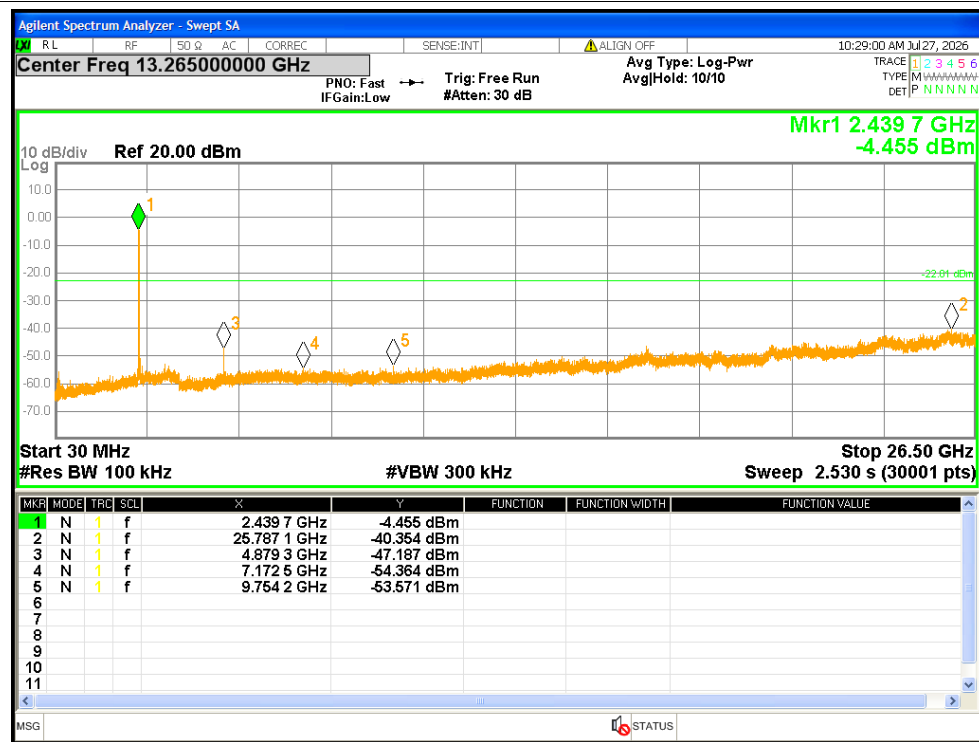

Tx. Spurious NVNT BLE 1M 2480MHz Ref



Tx. Spurious NVNT BLE 1M 2480MHz Emission

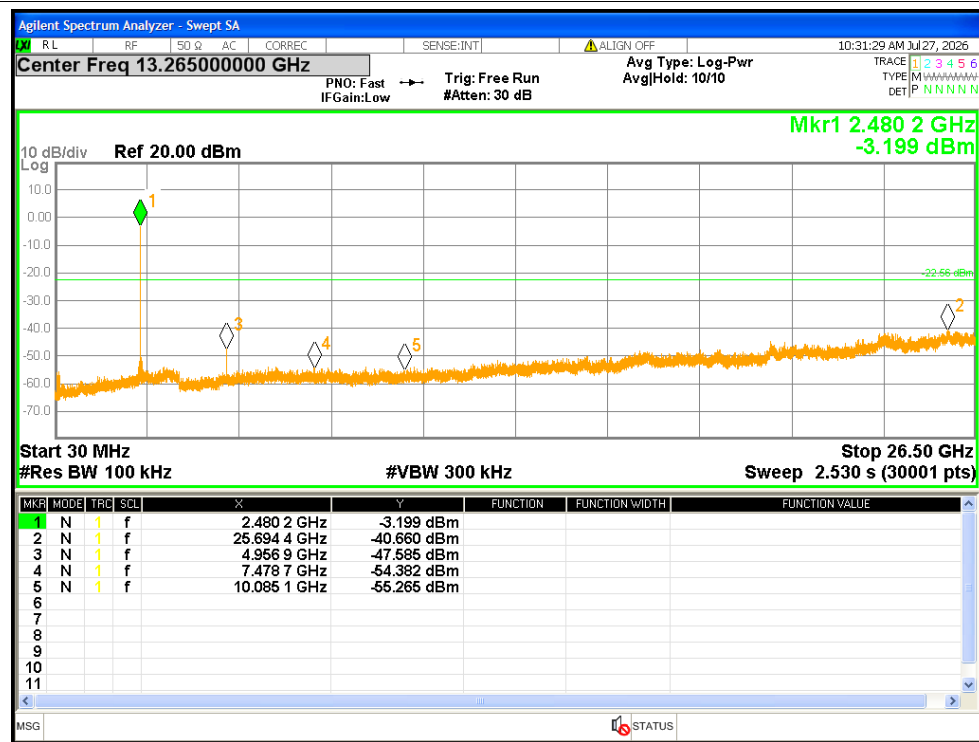


Restrict Band


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-50.29	2	0	46.97	Peak	<=74	Pass
BLE 1M	2402	2310	-57.92	2	2.12	41.46	Average	<=54	Pass
BLE 1M	2402	2377.872	-43.37	2	0	53.89	Peak	<=74	Pass
BLE 1M	2402	2378.064	-51.34	2	2.12	48.04	Average	<=54	Pass
BLE 1M	2402	2390	-47.93	2	0	49.33	Peak	<=74	Pass
BLE 1M	2402	2390	-56.05	2	2.12	43.33	Average	<=54	Pass
BLE 1M	2480	2483.5	-44.01	2	0	53.25	Peak	<=74	Pass
BLE 1M	2480	2483.5	-52.05	2	2.1	47.31	Average	<=54	Pass
BLE 1M	2480	2483.656	-42.54	2	0	54.72	Peak	<=74	Pass
BLE 1M	2480	2483.632	-51.64	2	2.1	47.72	Average	<=54	Pass
BLE 1M	2480	2500	-45.89	2	0	51.37	Peak	<=74	Pass
BLE 1M	2480	2500	-55.75	2	2.1	43.61	Average	<=54	Pass

Test Graphs


Restrict Band NVNT BLE 1M 2402MHz Peak

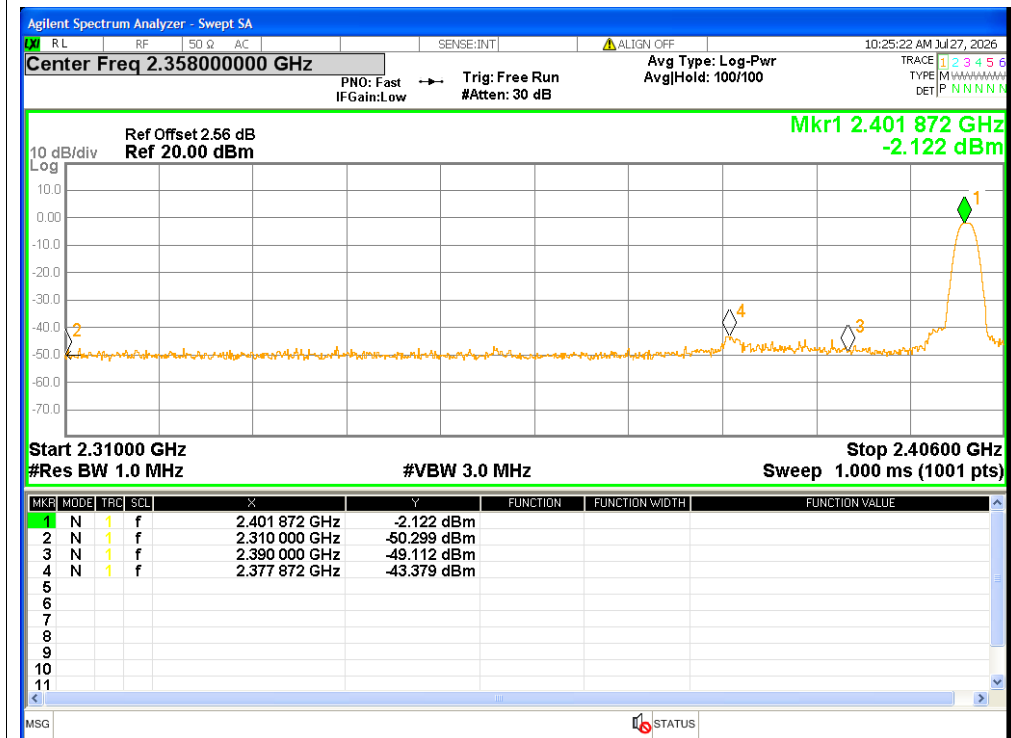

Restrict Band NVNT BLE 1M 2402MHz Average

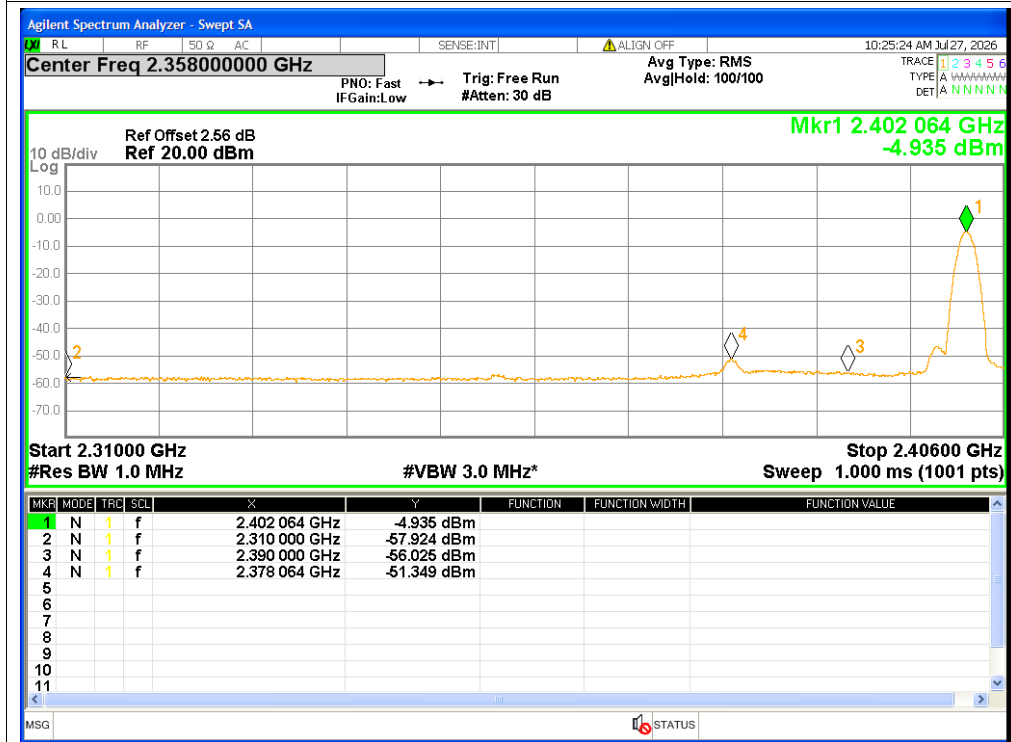

Restrict Band NVNT BLE 1M 2480MHz Peak

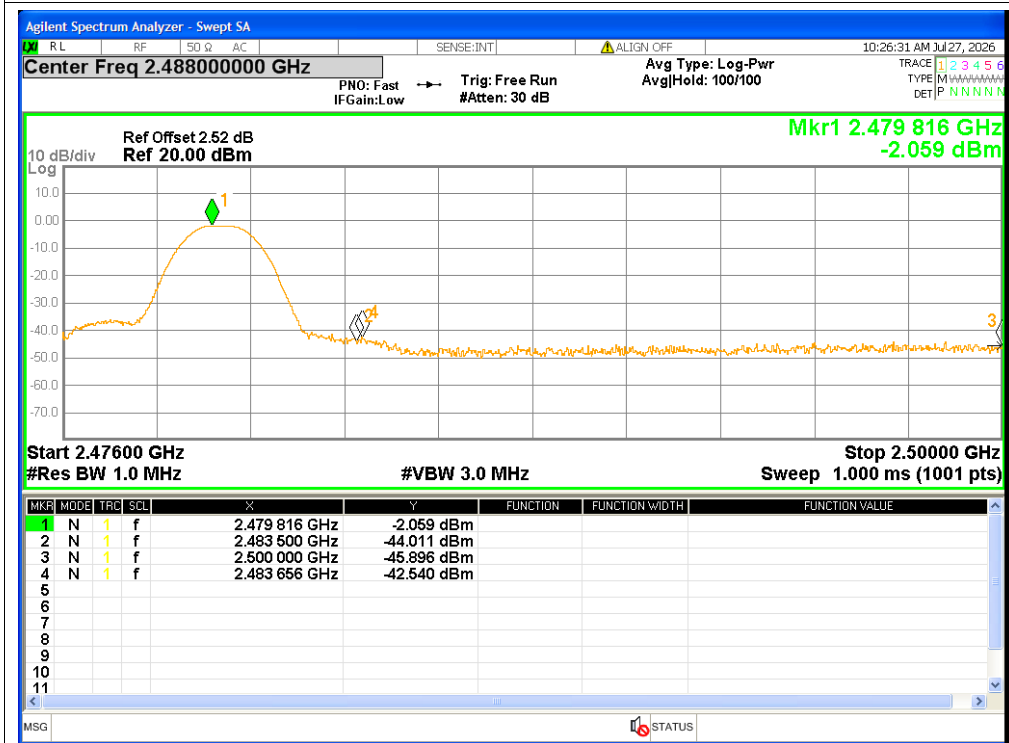

Restrict Band NVNT BLE 1M 2480MHz Average

