

TEST REPORT

Report No.: SHE20060042-02HE


Date: 2021-01-15

Page 25 of 52

Band Edge



Conducted spurious emissions 30MHz-25GHz

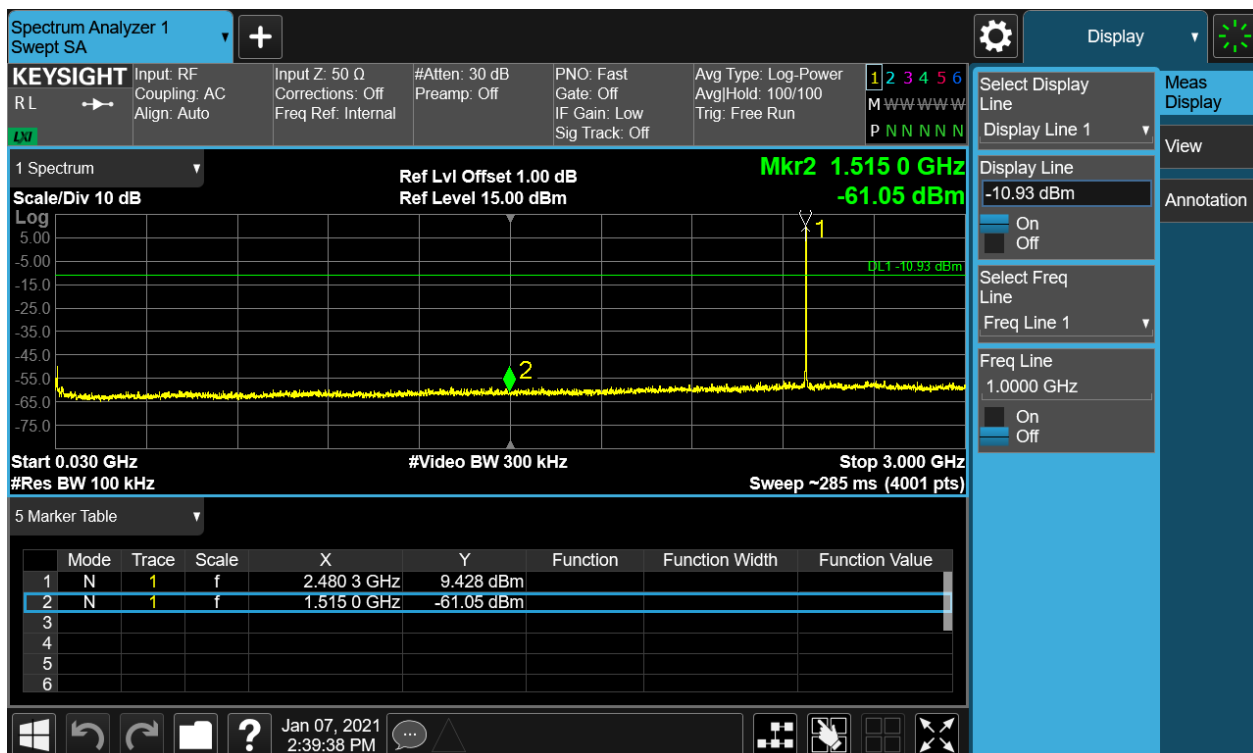

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 26 of 52


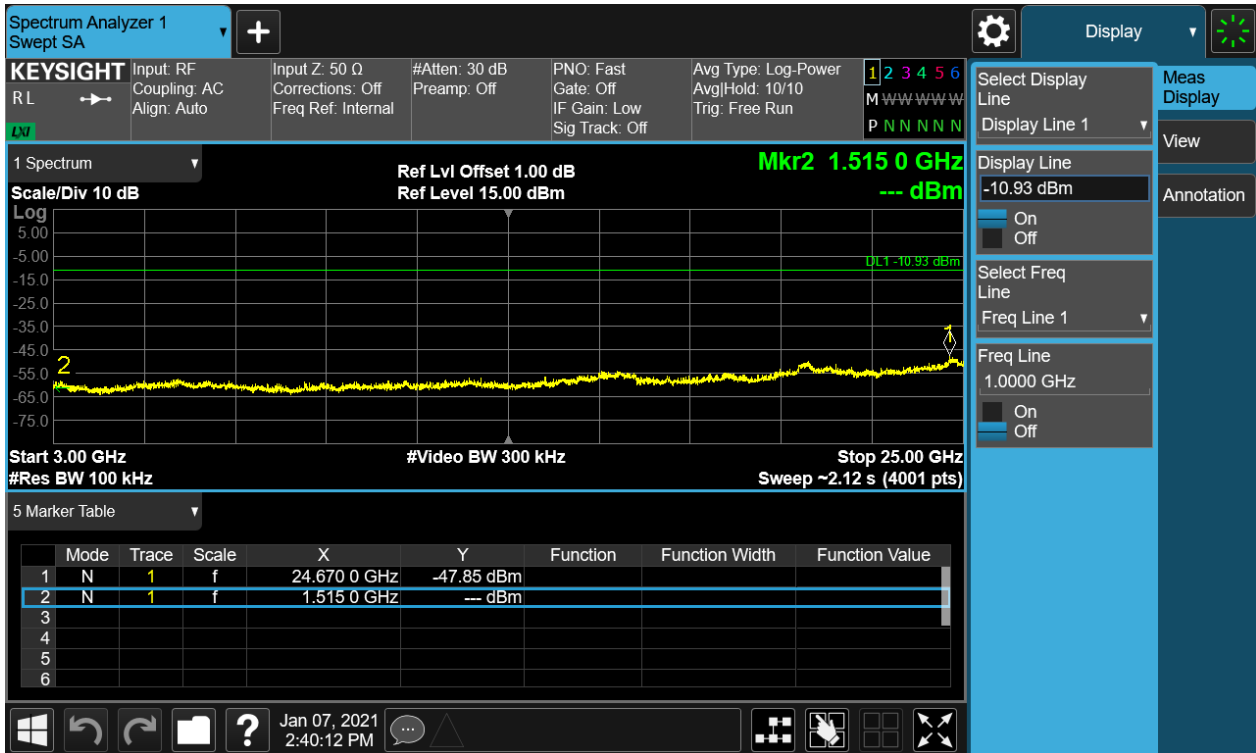


Figure 19: Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, 8-DPSK Carrier Level

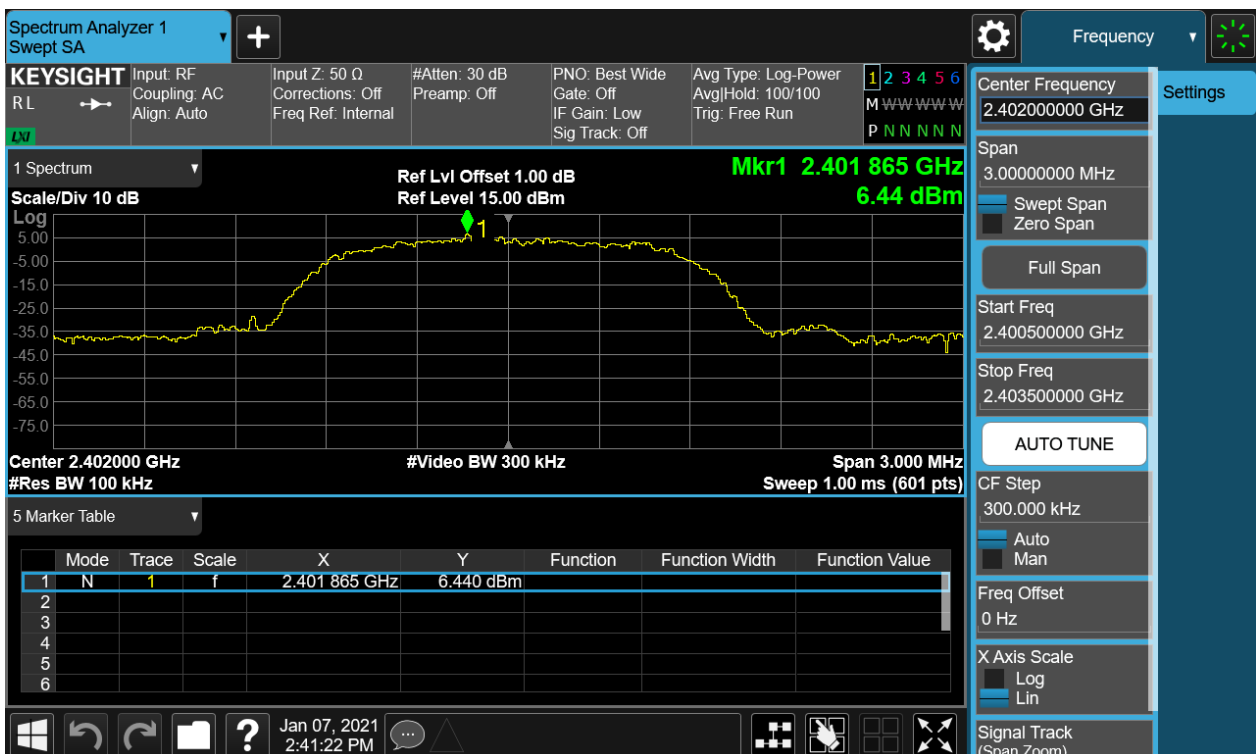


TEST REPORT

Report No.: SHE20060042-02HE


Date: 2021-01-15

Page 27 of 52

Band Edge

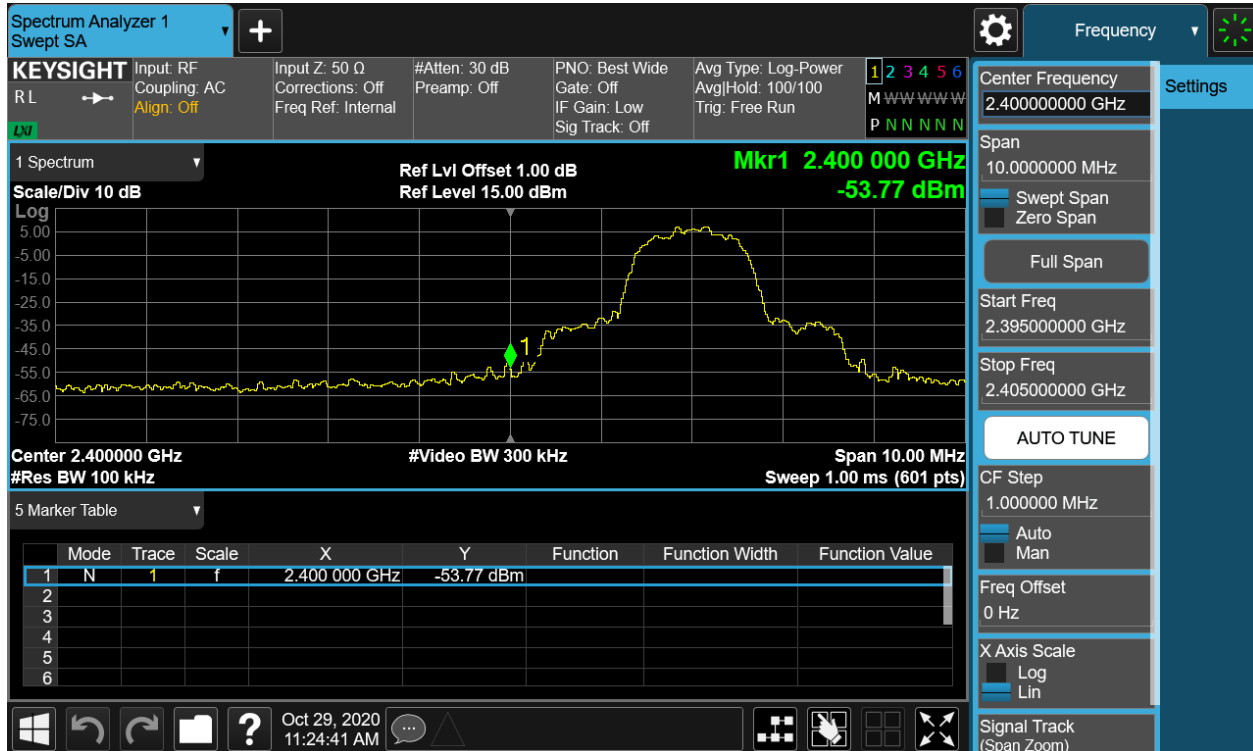

Conducted spurious emissions 30MHz-25GHz

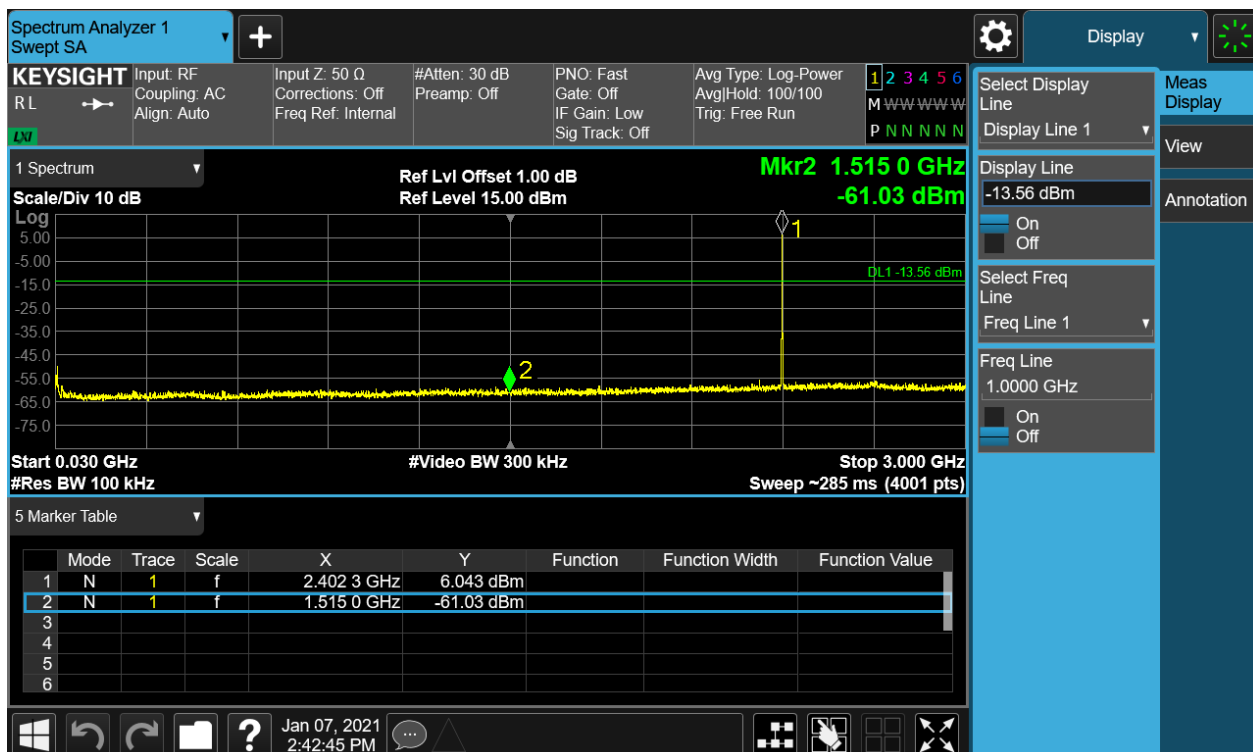

TEST REPORT

Report No.:

SHE20060042-02HE

Date:

2021-01-15

Page 28 of 52


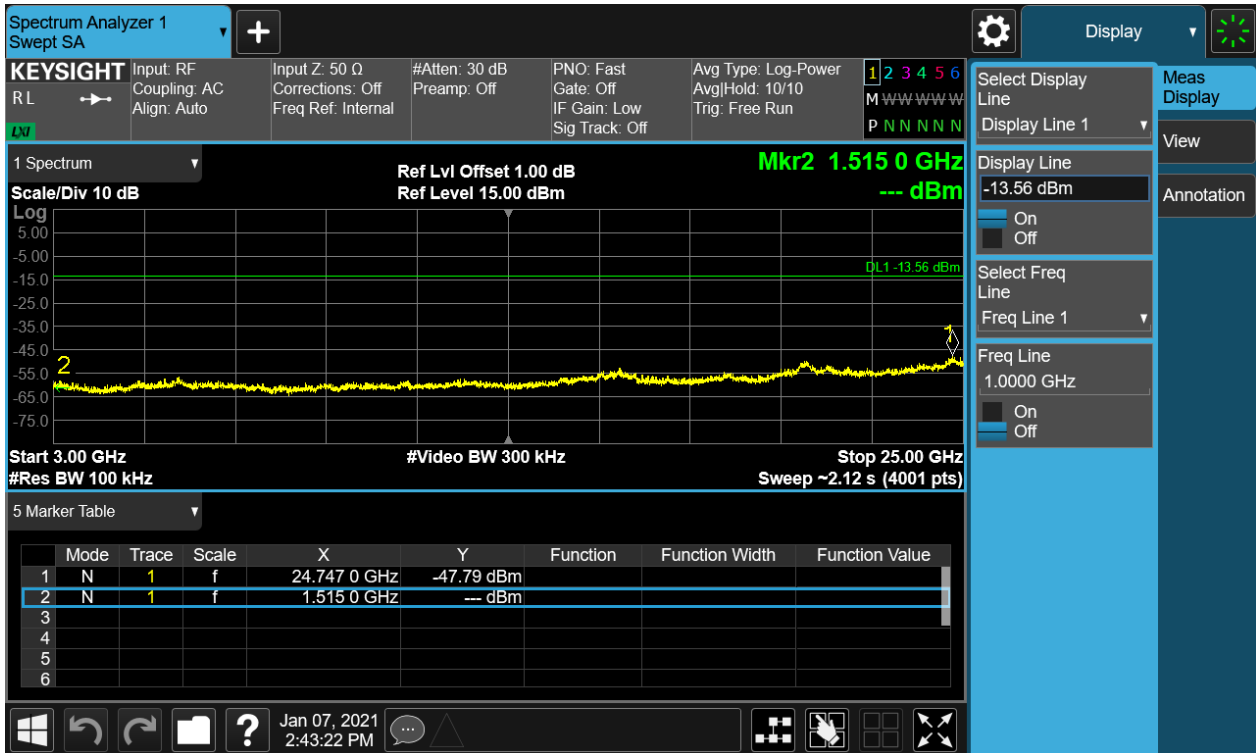


Figure 20: Conducted Spurious Emission & Authorized-band band-edge, 2441MHz, 8-DPSK Carrier Level

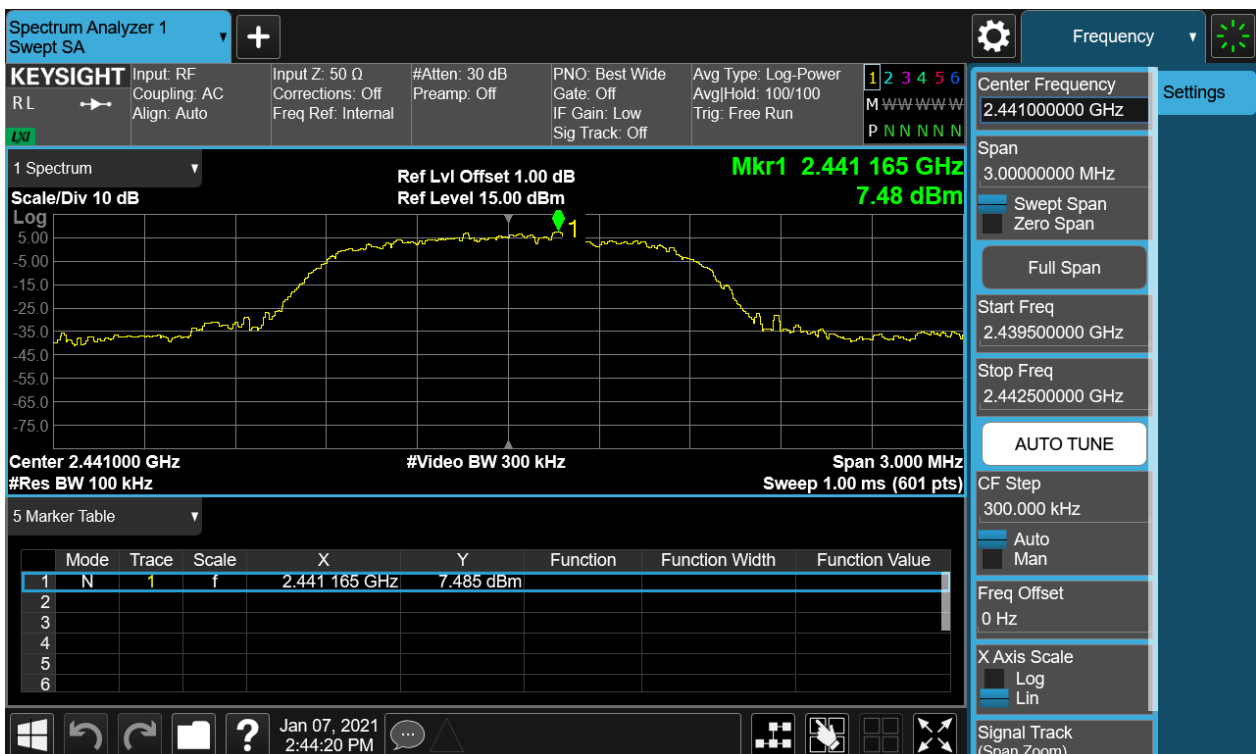



TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 29 of 52

Conducted spurious emissions 30MHz-25GHz

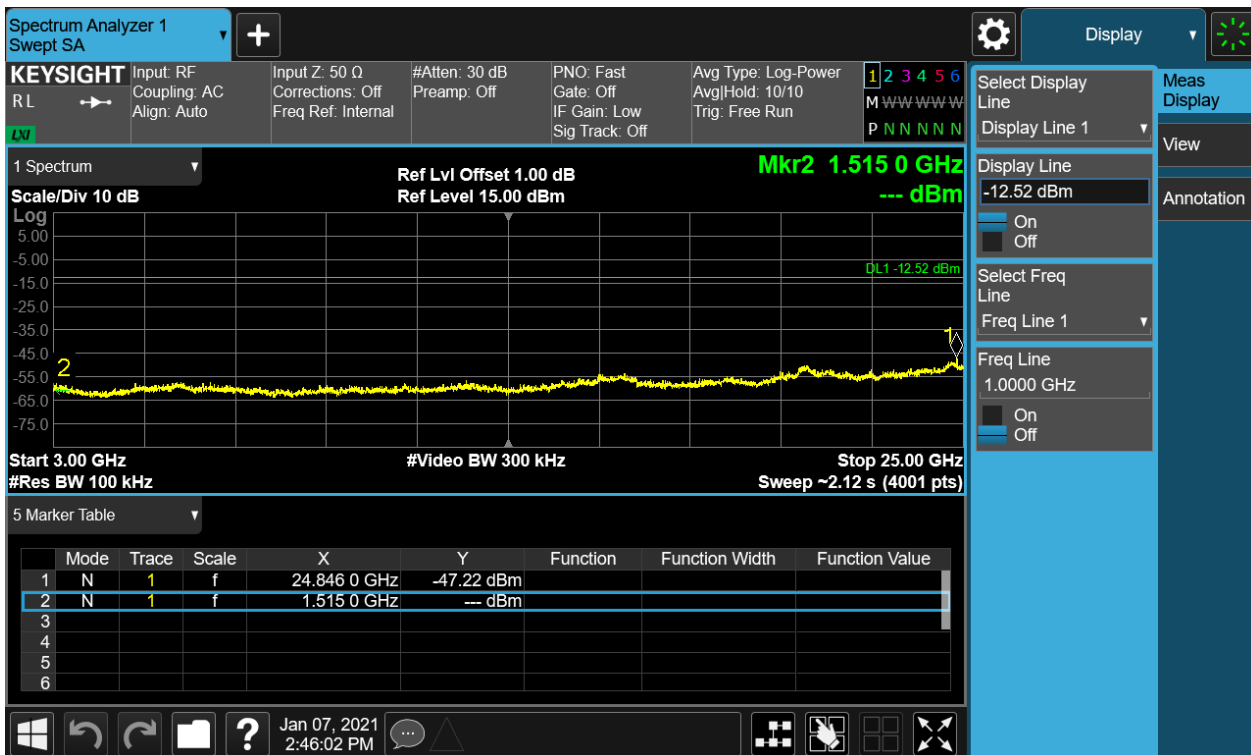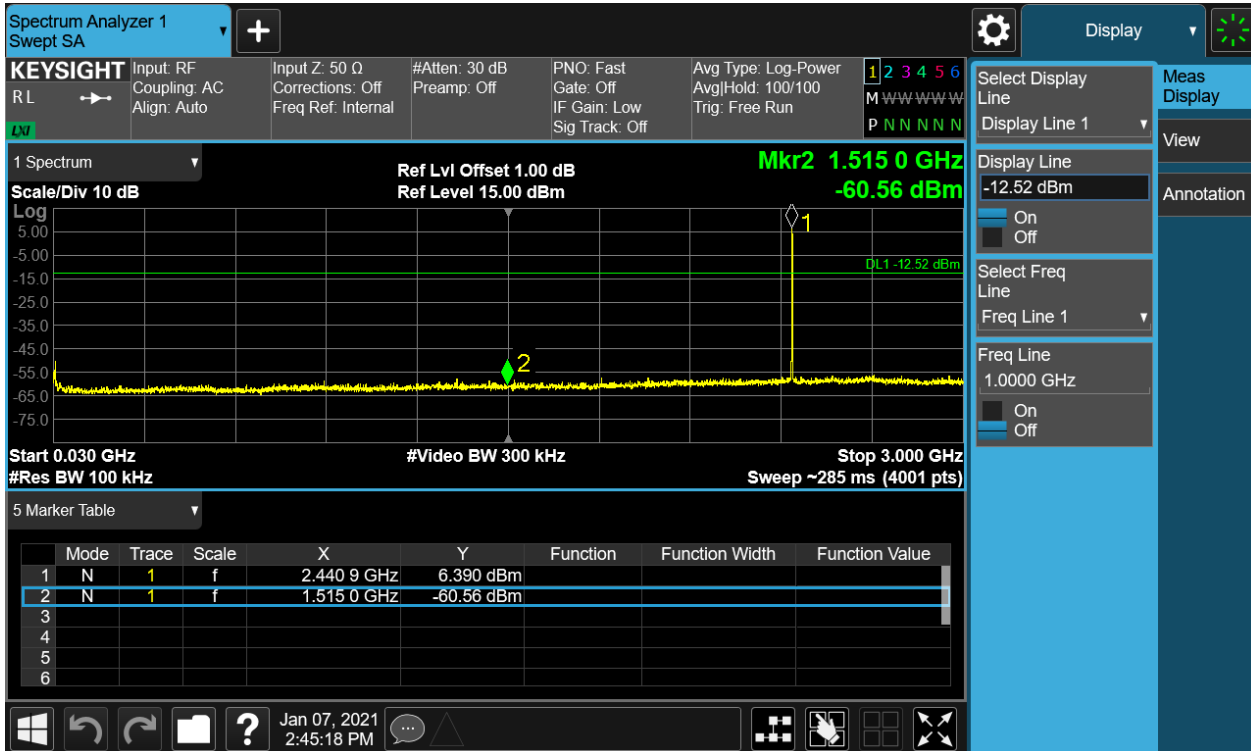


TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 30 of 52

Figure 21: Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, 8-DPSK Carrier Level

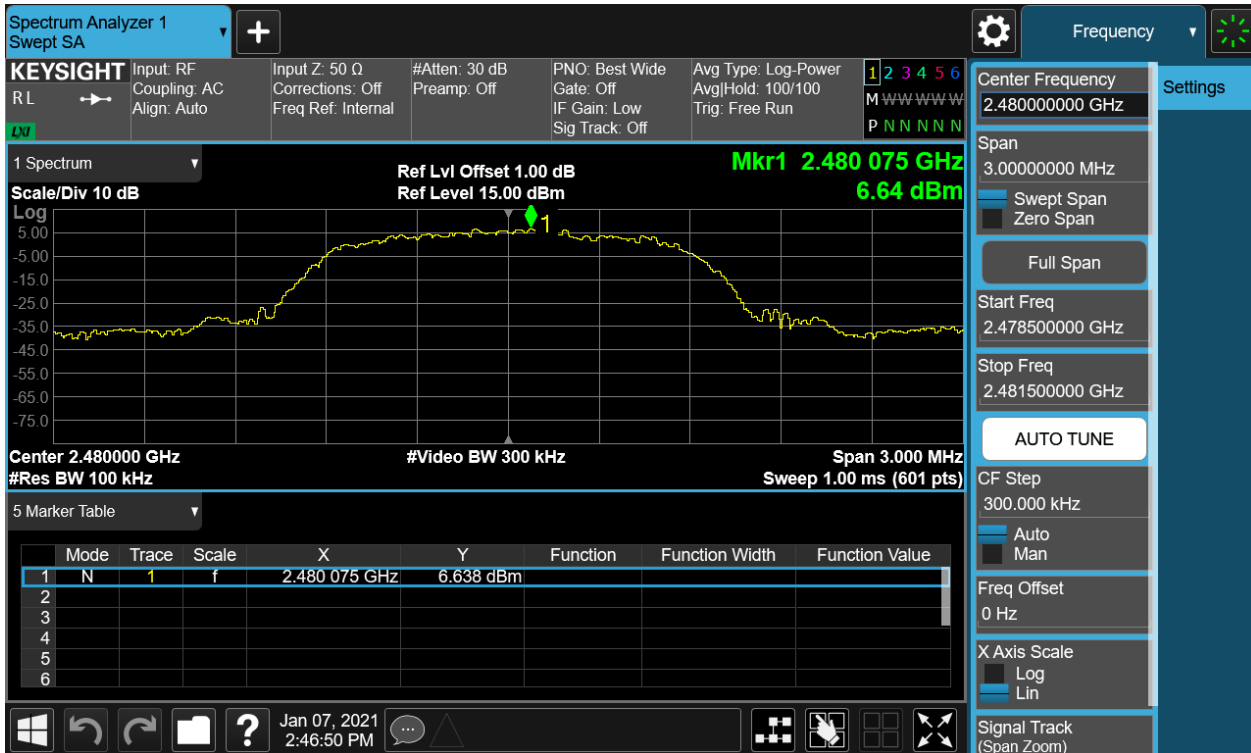

Band Edge





TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 31 of 52

Conducted spurious emissions 30MHz-25GHz

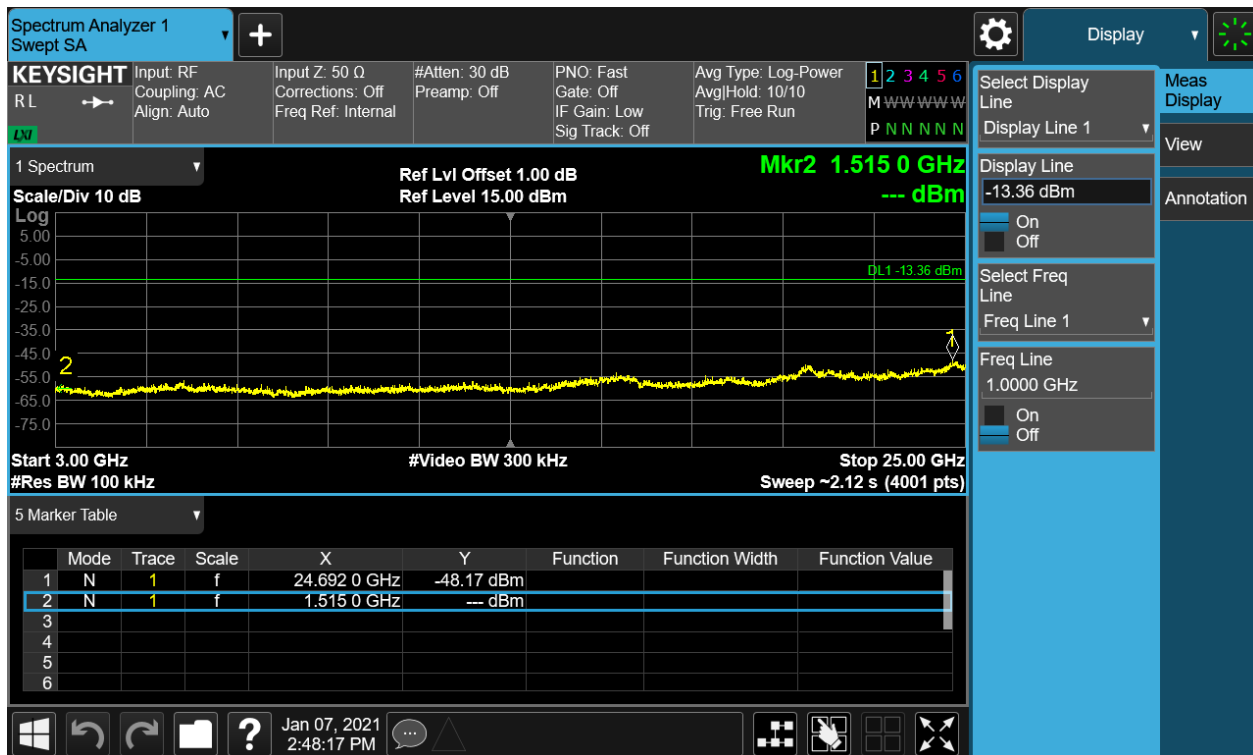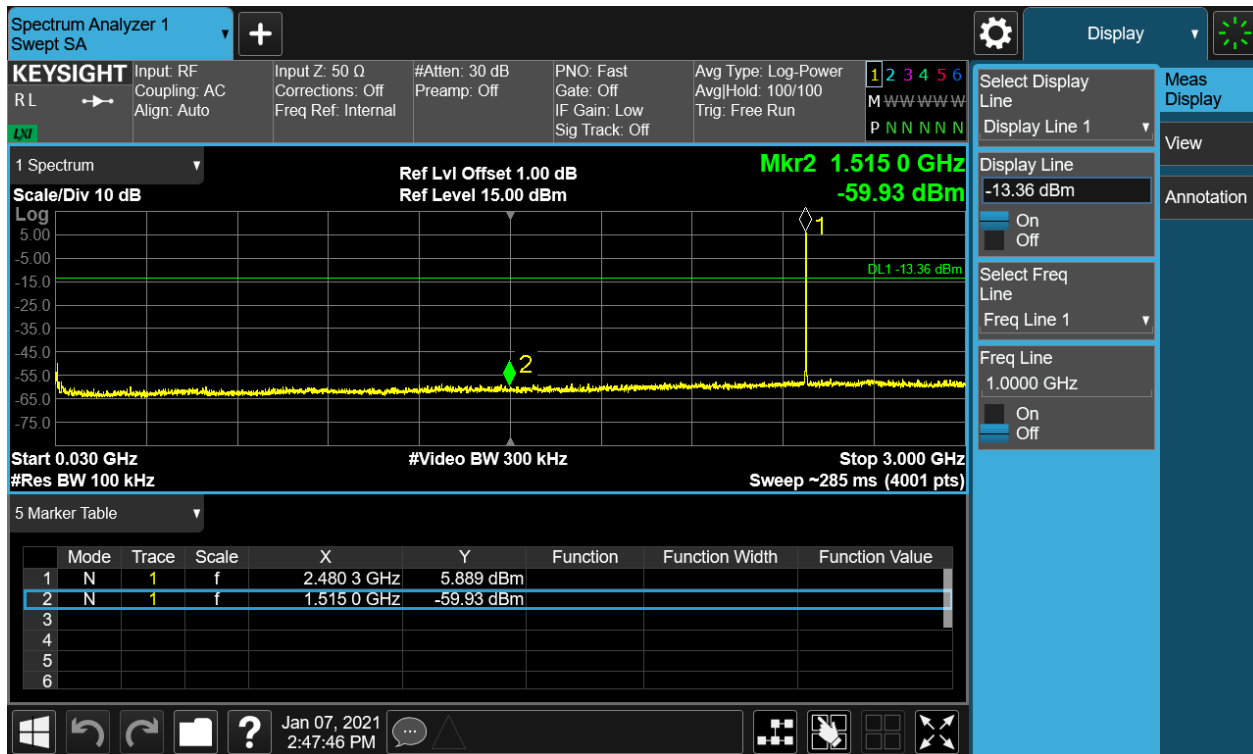


TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 32 of 52

Figure 22: Conducted Spurious Emission & Authorized-band band-edge, Hopping Mode, GFSK Carrier Level

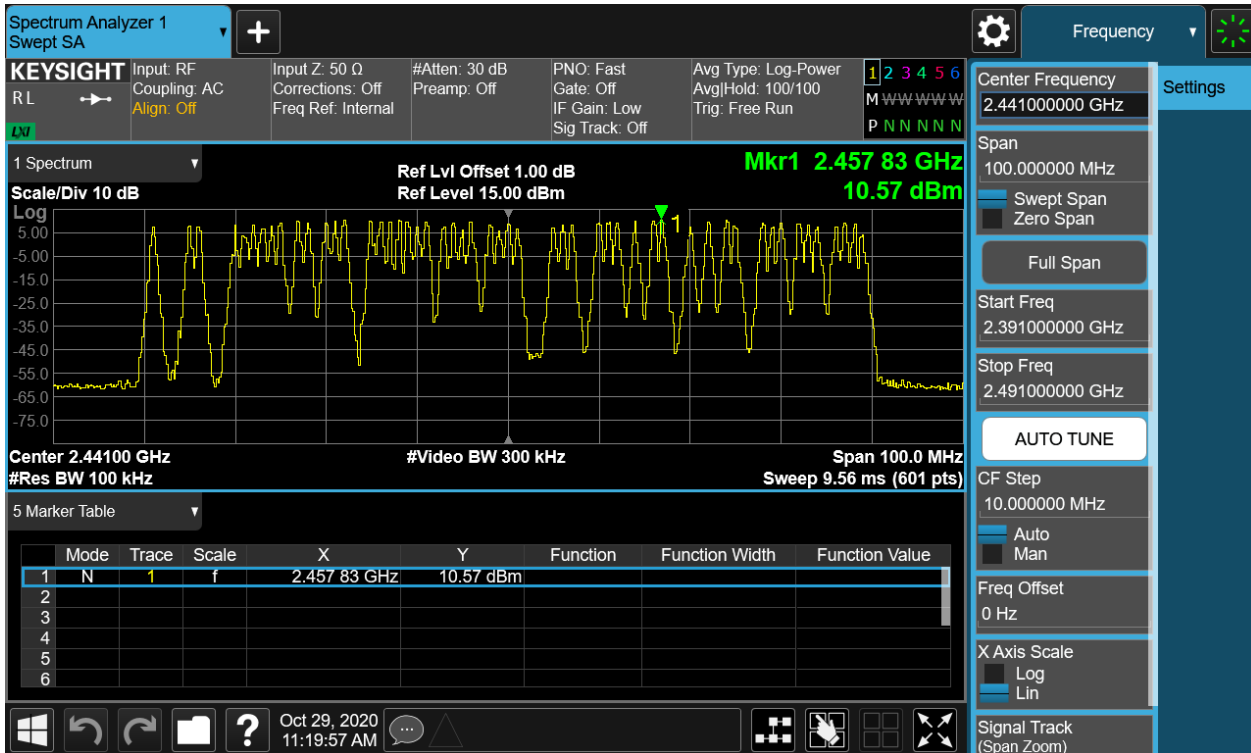

Band Edge(Low)



TEST REPORT

Report No.: SHE20060042-02HE


Date: 2021-01-15

Page 33 of 52

Band Edge(High)



Conducted spurious emissions 30MHz-25GHz

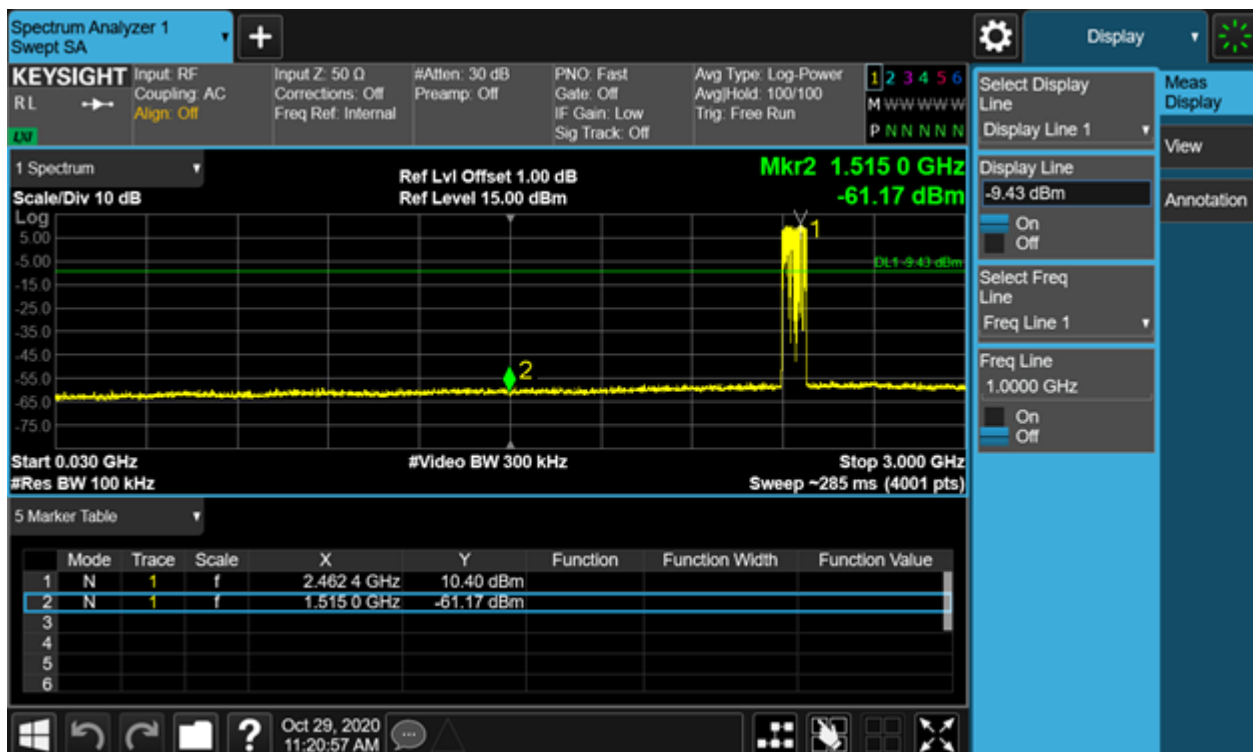

TEST REPORT


Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 34 of 52



Figure 23: Conducted Spurious Emission & Authorized-band band-edge, Hopping Mode, 8-DPSK Carrier Level

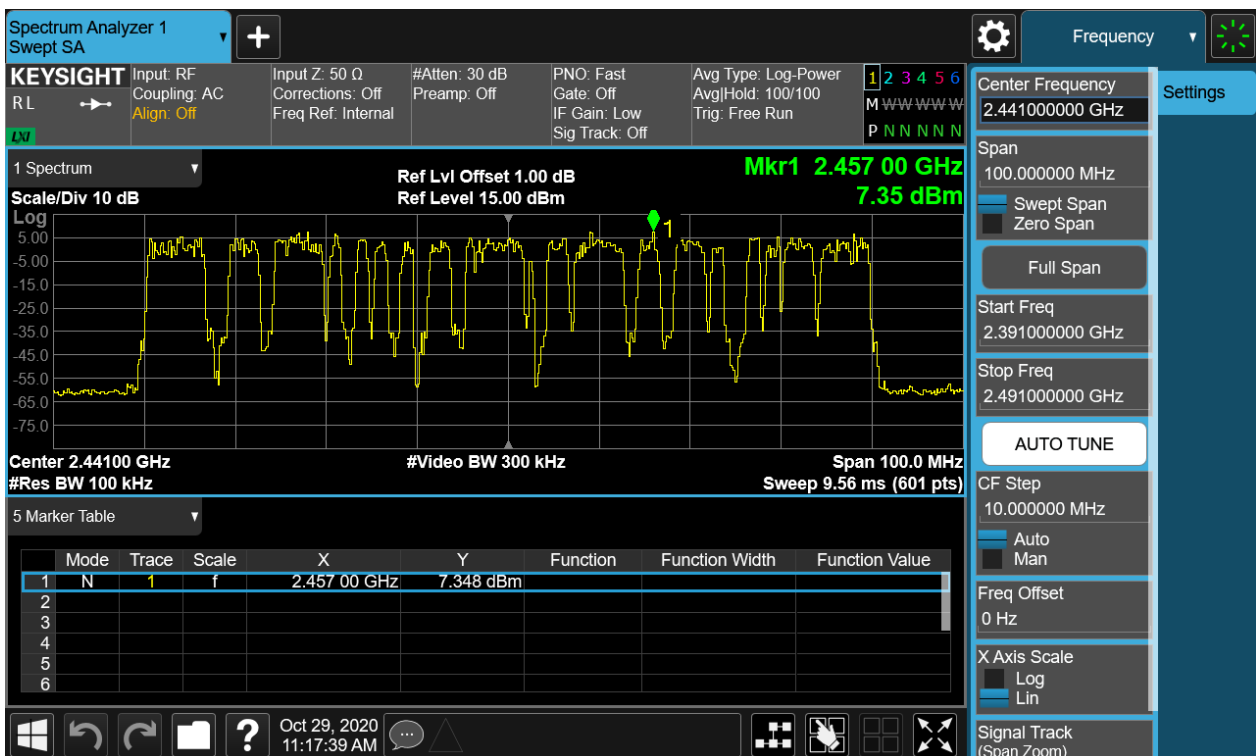


TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 35 of 52

Band Edge(Low)

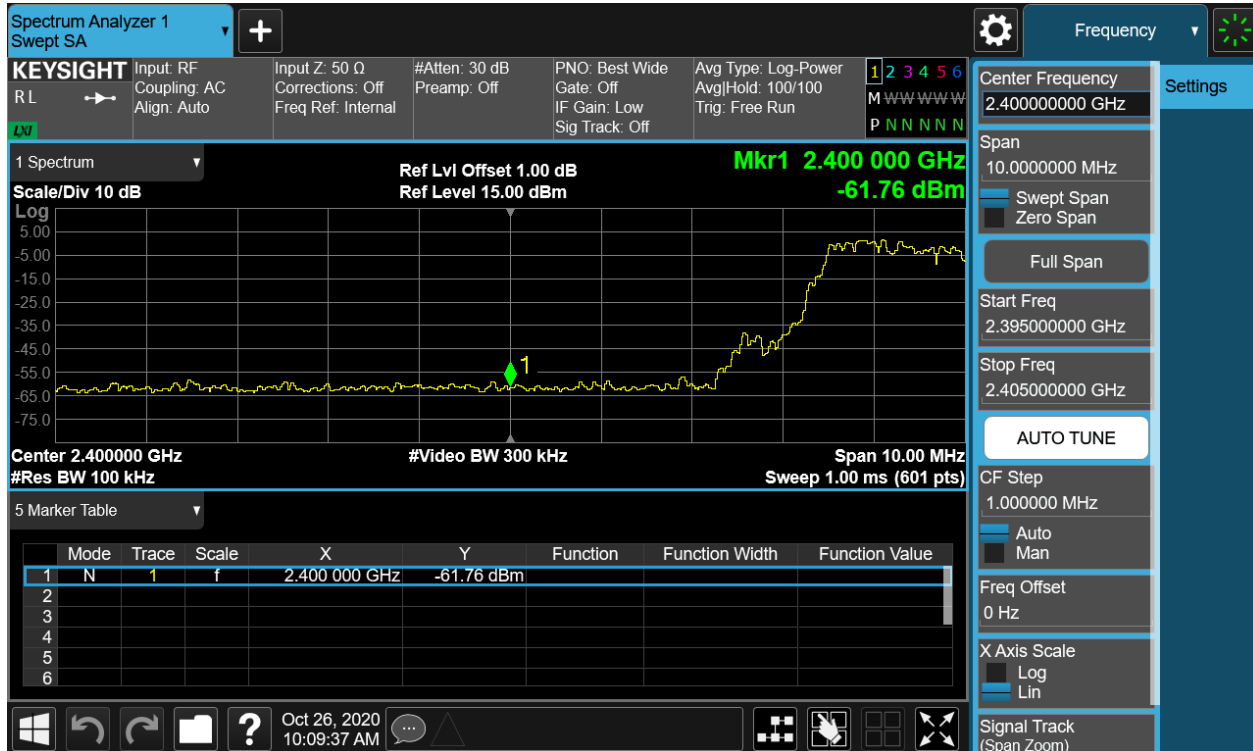

Band Edge(High)





TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 36 of 52

Conducted spurious emissions 30MHz-25GHz

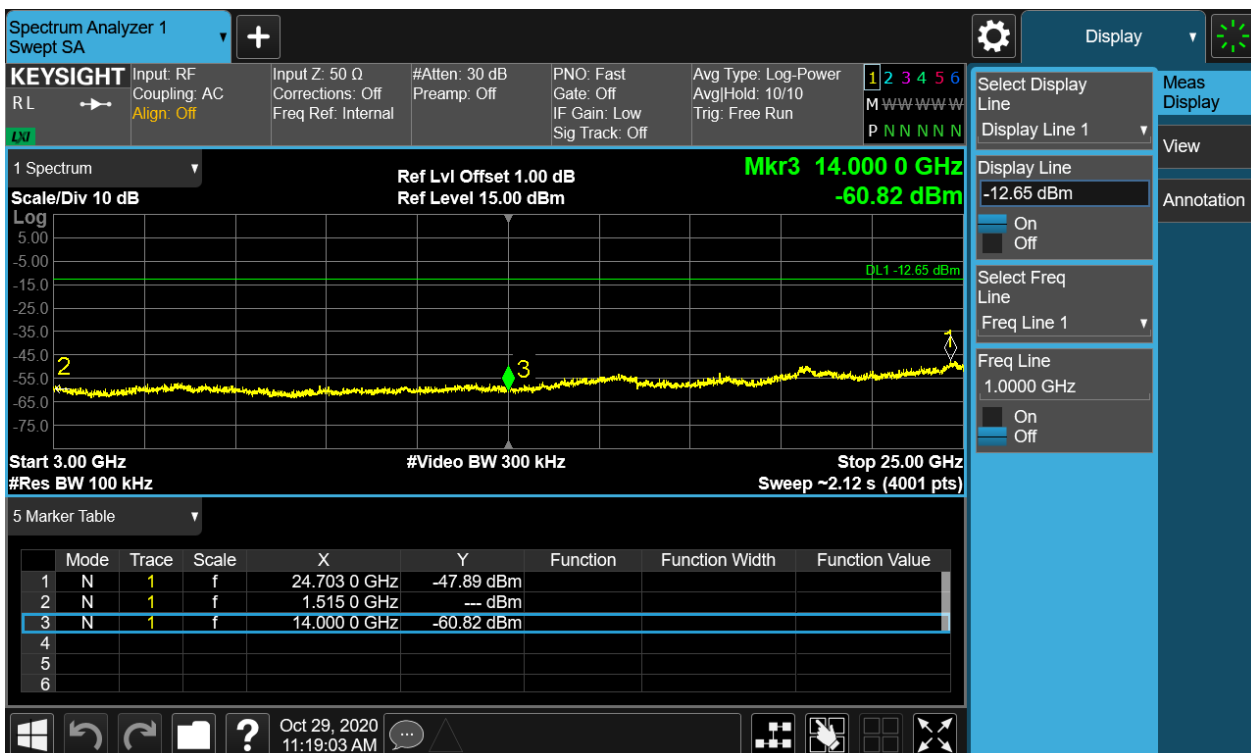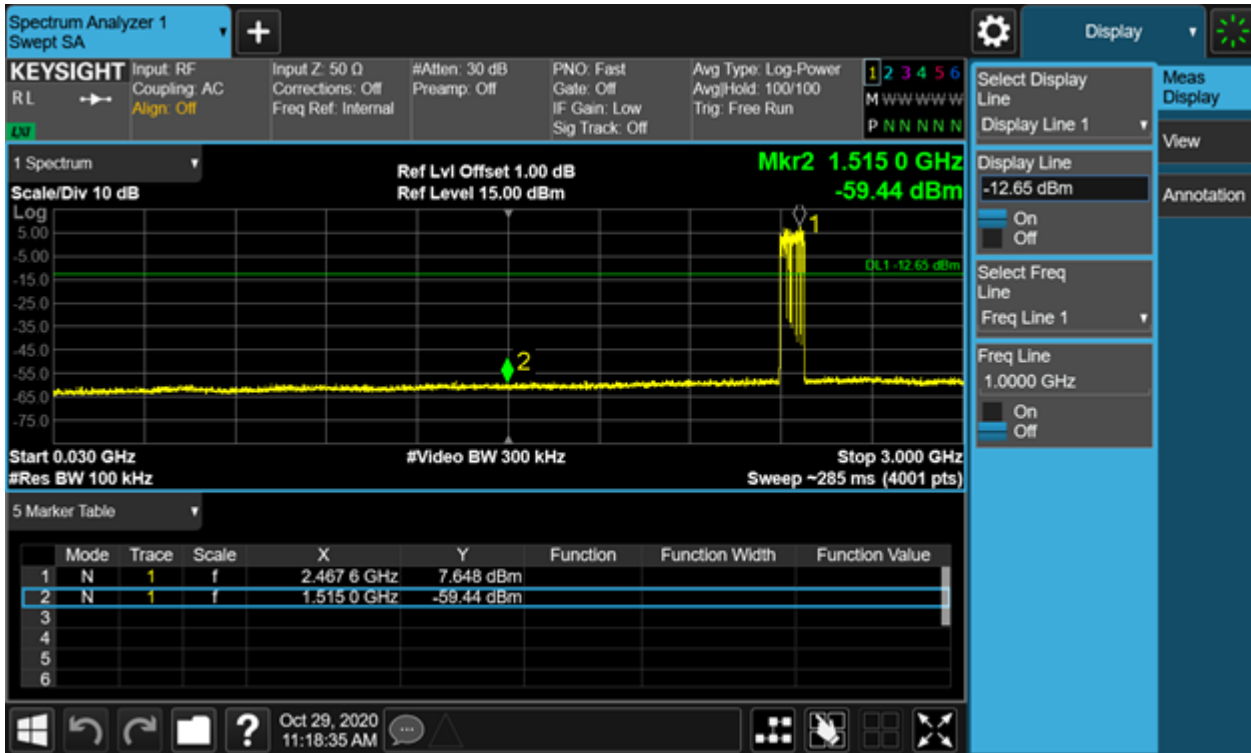

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 37 of 52

4.1.5 Spurious Emission

RESULT:

PASS

Test standard : FCC Part 15.247(d), 15.205, 15.209
RSS-247 5.5
Requirement : ANSI C63.10-2013
Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Low/Middle/High
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 52%

Notes

Test plots please refer to the annex document "BDEDR-TX EXHIBIT A of SHE20060042-02HE".

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.
2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
3. The EUT is working in the Normal link mode below 1 GHz.

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 38 of 52

4.1.6 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209 RSS-247 5.5
Requirement	: ANSI C63.10-2013
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1
Ambient temperature	: 25°C
Relative humidity	: 52%

Notes

Test plots please refer to the annex document "BDEDR-TX EXHIBIT A of SHE20060042-02HE".

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 39 of 52

4.1.7 Hopping Frequency Separation

RESULT:

PASS

Test standard : FCC Part 15.247(a)(1)
RSS-247 5.1(2)
Requirement : ANSI C63.10-2013
Kind of test site : Shielded room

Test setup

Test Channel : Hopping
Operation Mode : A.1.a.iv
Ambient temperature : 25°C
Relative humidity : 52%

Table 4: Hopping Frequency Separation

Mode	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
GFSK	2441	1.000	≥ 25kHz or two-thirds of 20dB bandwidth
8-DPSK	2441	1.045	

*Note: The systems operate with an output power no greater than 125mW.

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 40 of 52

Figure 24: Hopping Frequency Separation, Hopping Mode, GFSK


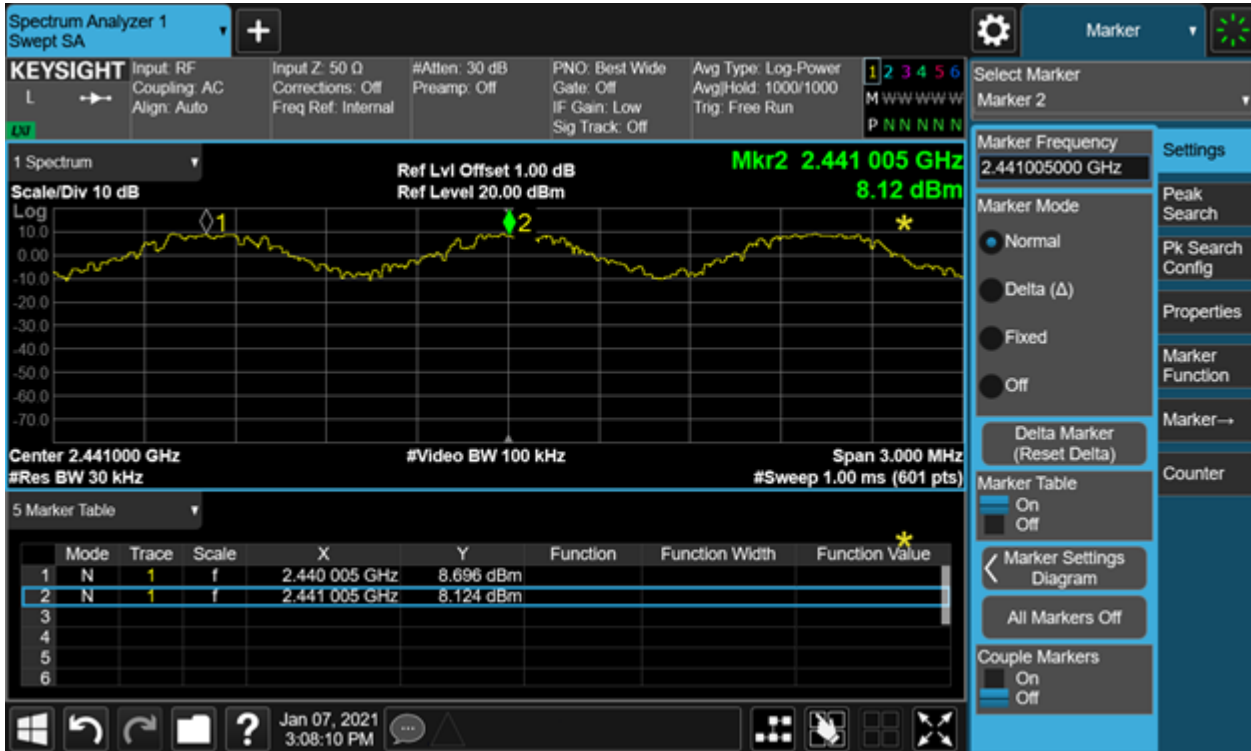


Figure 25: Hopping Frequency Separation, Hopping Mode, 8DPSK

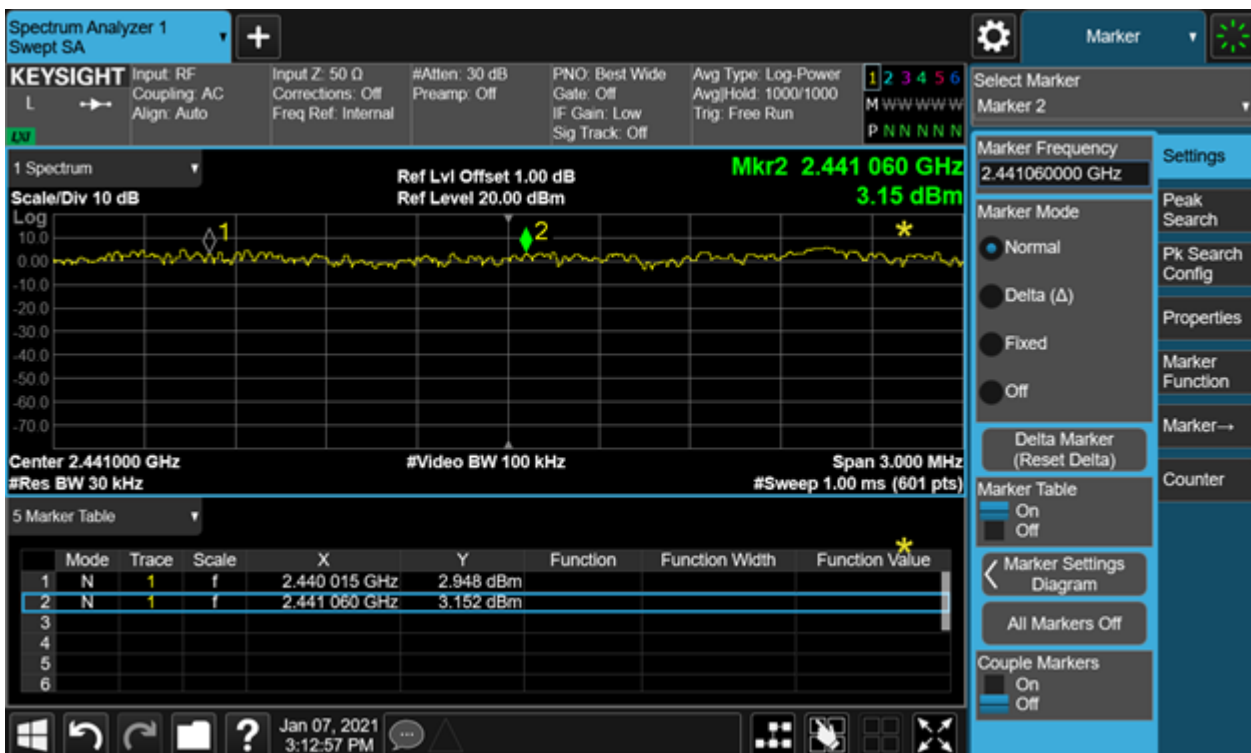

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 41 of 52

4.1.8 Number of Hopping Frequency

RESULT:

PASS

Test standard : FCC Part 15.247(a)(1)(iii)
RSS-247 5.1(4)
Requirement : ANSI C63.10-2013
Kind of test site : Shielded room

Test setup

Test Channel : Hopping
Operation Mode : A.1.a.iv
Ambient temperature : 25°C
Relative humidity : 52%

Table 5: Number of Hopping Frequency

Mode	Frequency Range	Measured Quantity of Hopping Channel	Limit
GFSK	2400 – 2483.5	79	≥15
8-DPSK	2400 – 2483.5	79	≥15

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 42 of 52

Figure 26: Number of Hopping Frequency, Hopping Mode, GFSK


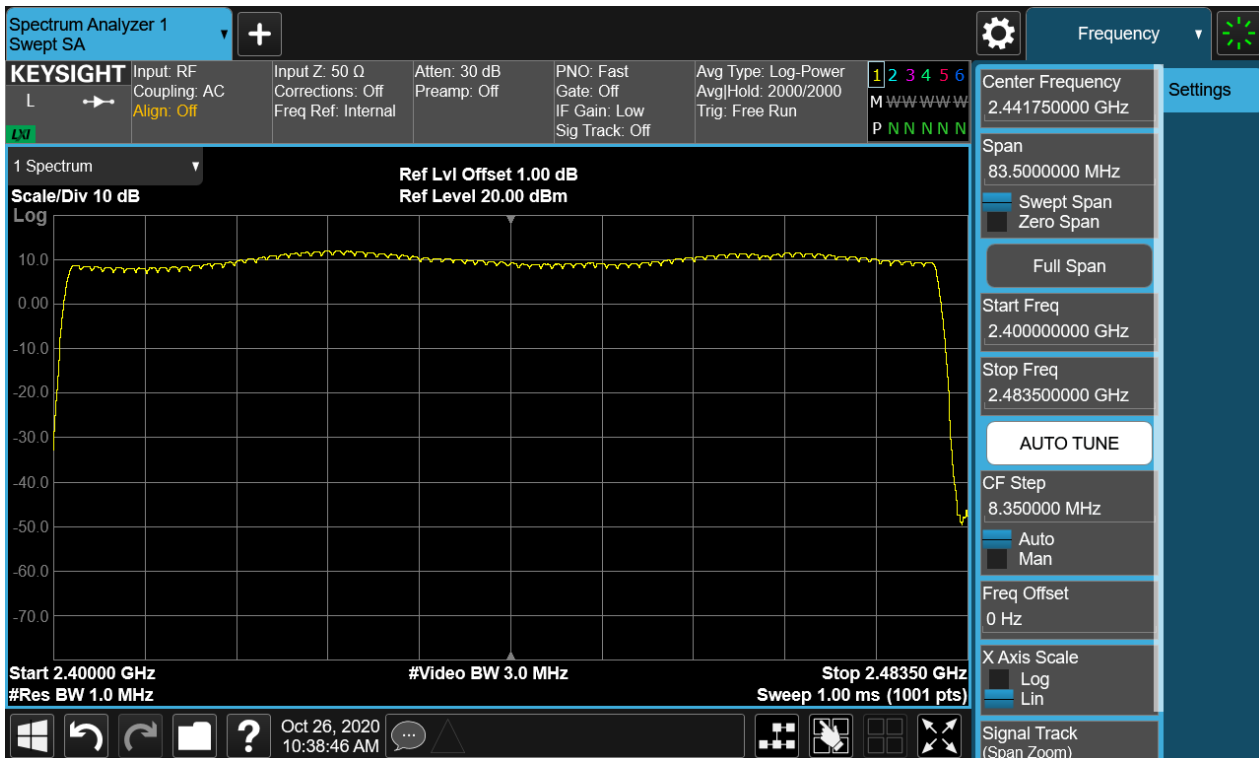


Figure 27: Number of Hopping Frequency, Hopping Mode, 8-DPSK

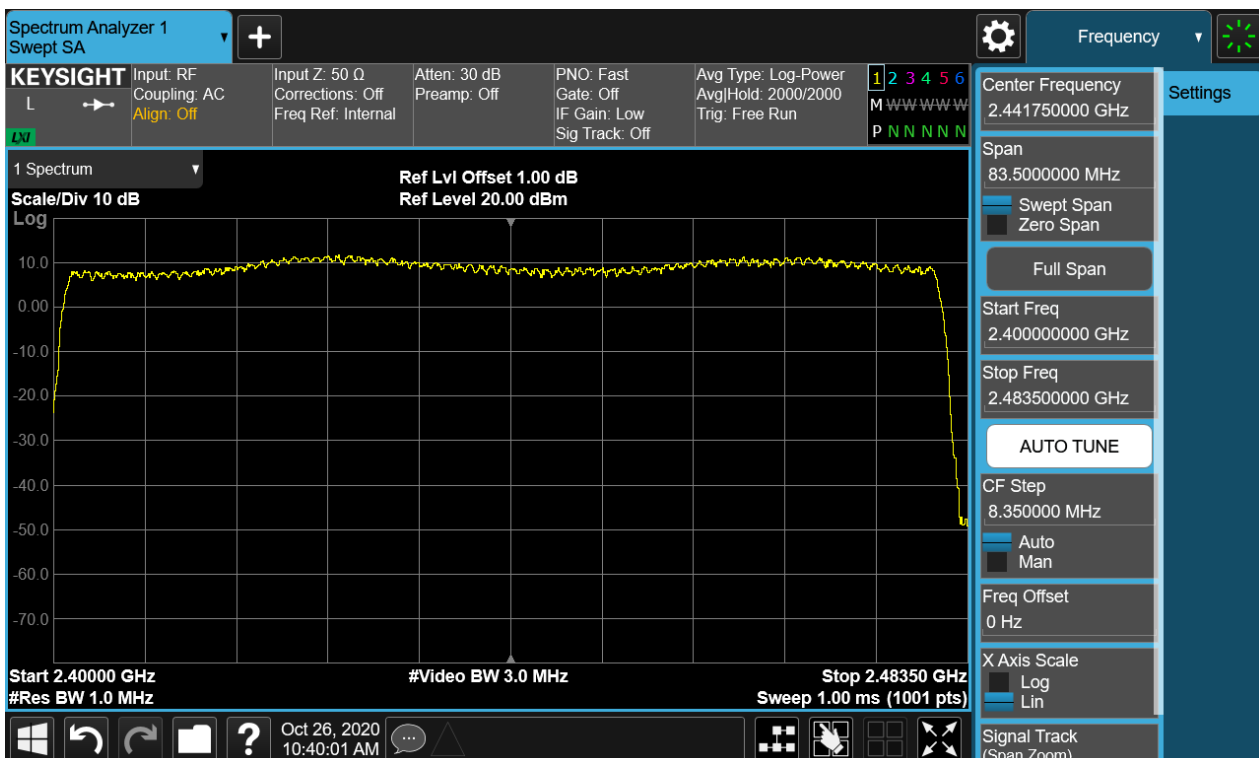

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 43 of 52

4.1.9 Time of Occupancy

RESULT:

PASS

Test standard : FCC Part 15.247(a)(1)(iii)
RSS-247 5.1(4)
Requirement : ANSI C63.10-2013
Kind of test site : Shielded room

Test setup

Test Channel : Middle
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 52%

Table 6: Time of Occupancy

Mode	Packet Type	Pulse Time (ms)	Total of Dwell (ms)	Limit (s)
GFSK	DH1	0.4083	130.656	0.4
	DH3	1.6830	269.280	0.4
	DH5	2.9370	313.280	0.4
8-DPSK	DH1	0.4150	132.800	0.4
	DH3	1.6720	267.520	0.4
	DH5	2.9250	312.000	0.4

Note:

For DH1 package type:

Total of Dwell = Pulse Time*(1600/2)/Number of Hopping Frequency*Period

Period = 0.4* Number of Hopping Frequency

For DH3 package type:

Total of Dwell = Pulse Time*(1600/4)/Number of Hopping Frequency*Period

Period = 0.4* Number of Hopping Frequency

For DH5 package type:

Total of Dwell = Pulse Time*(1600/6)/Number of Hopping Frequency*Period

Period = 0.4* Number of Hopping Frequency

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 44 of 52

Figure 28: Time of Occupancy, 2441MHz, GFSK DH1


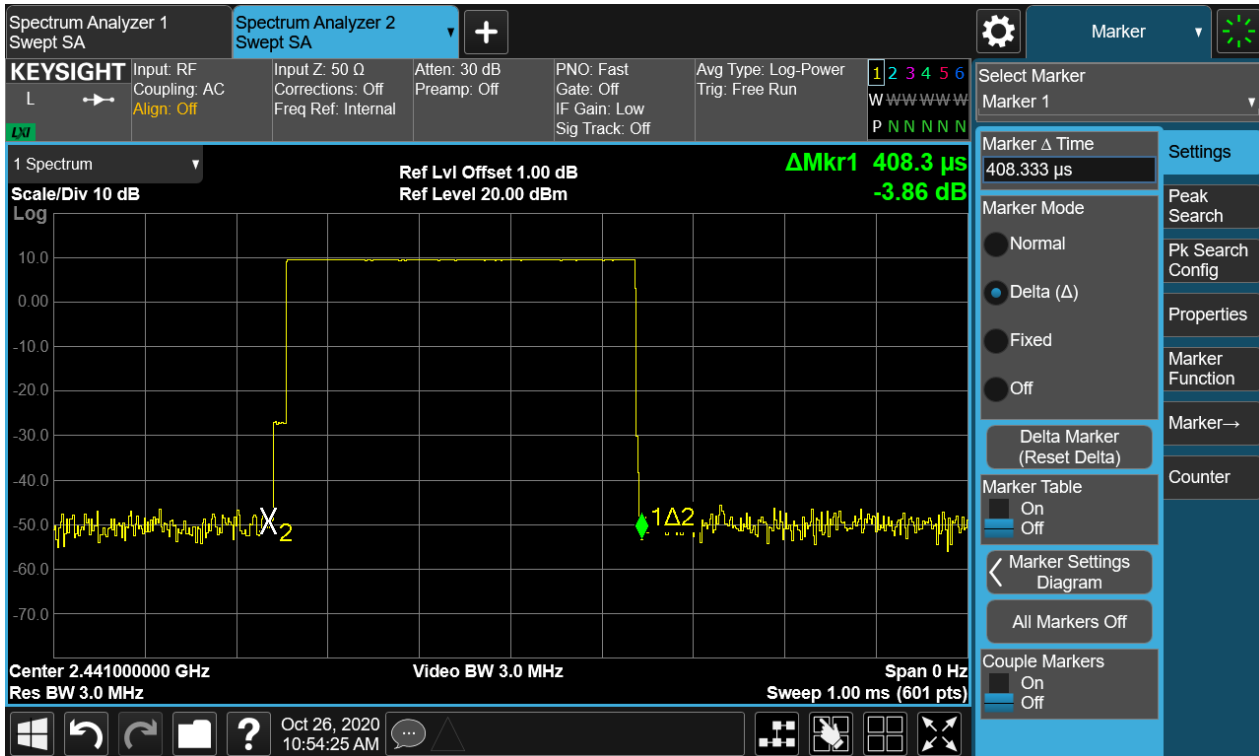


Figure 26: Time of Occupancy, 2441MHz, GFSK DH3

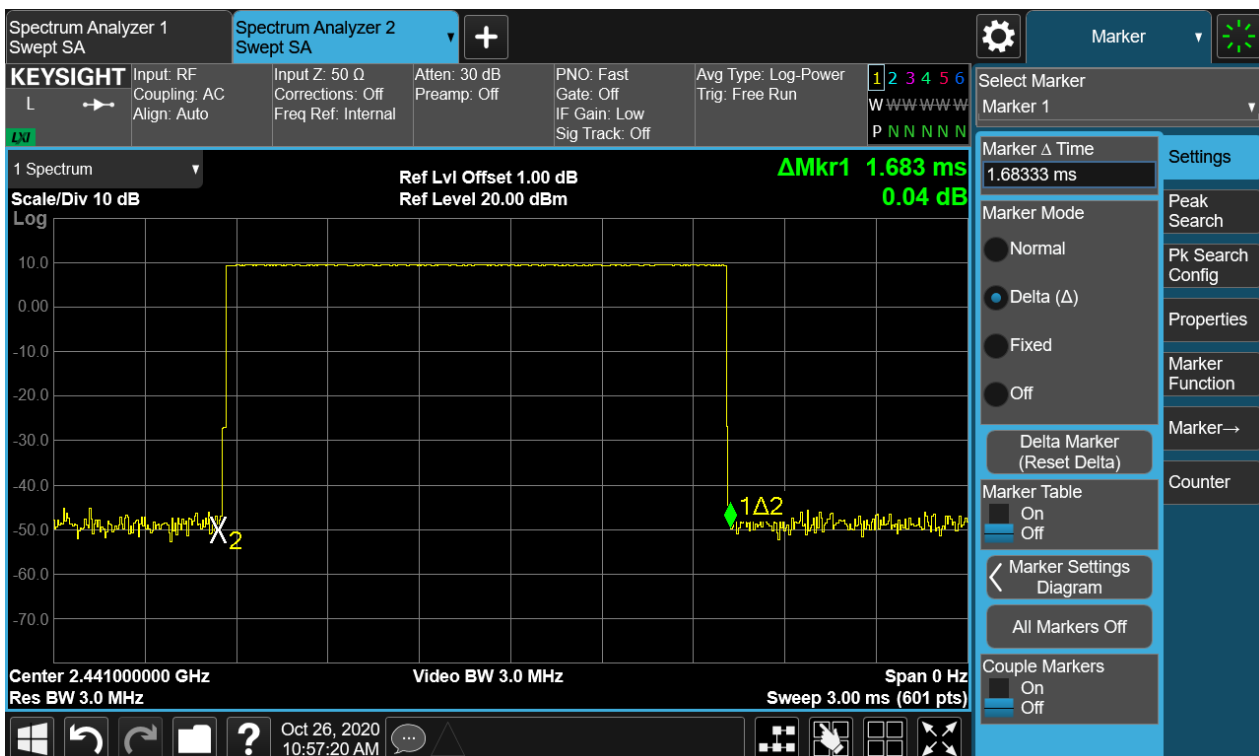

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 45 of 52

Figure 30: Time of Occupancy, 2441MHz, GFSK DH5


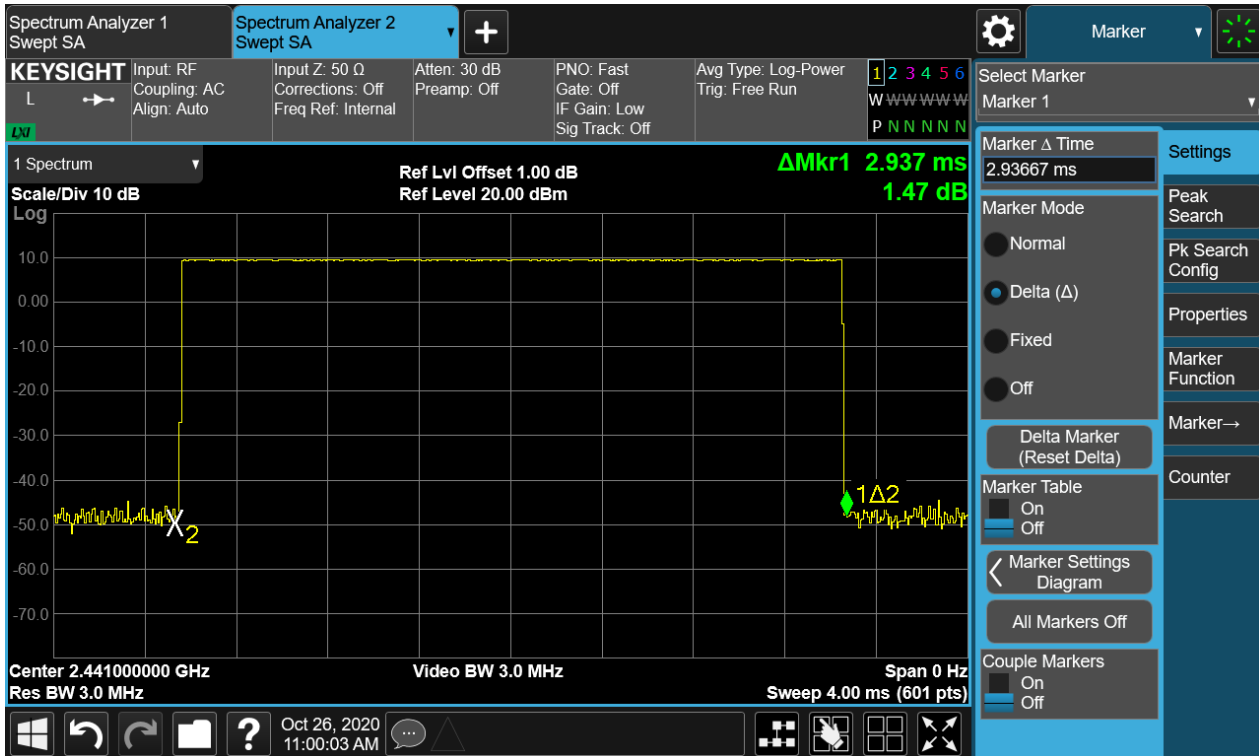


Figure 31: Time of Occupancy, 2441MHz, 8-DPSK DH1

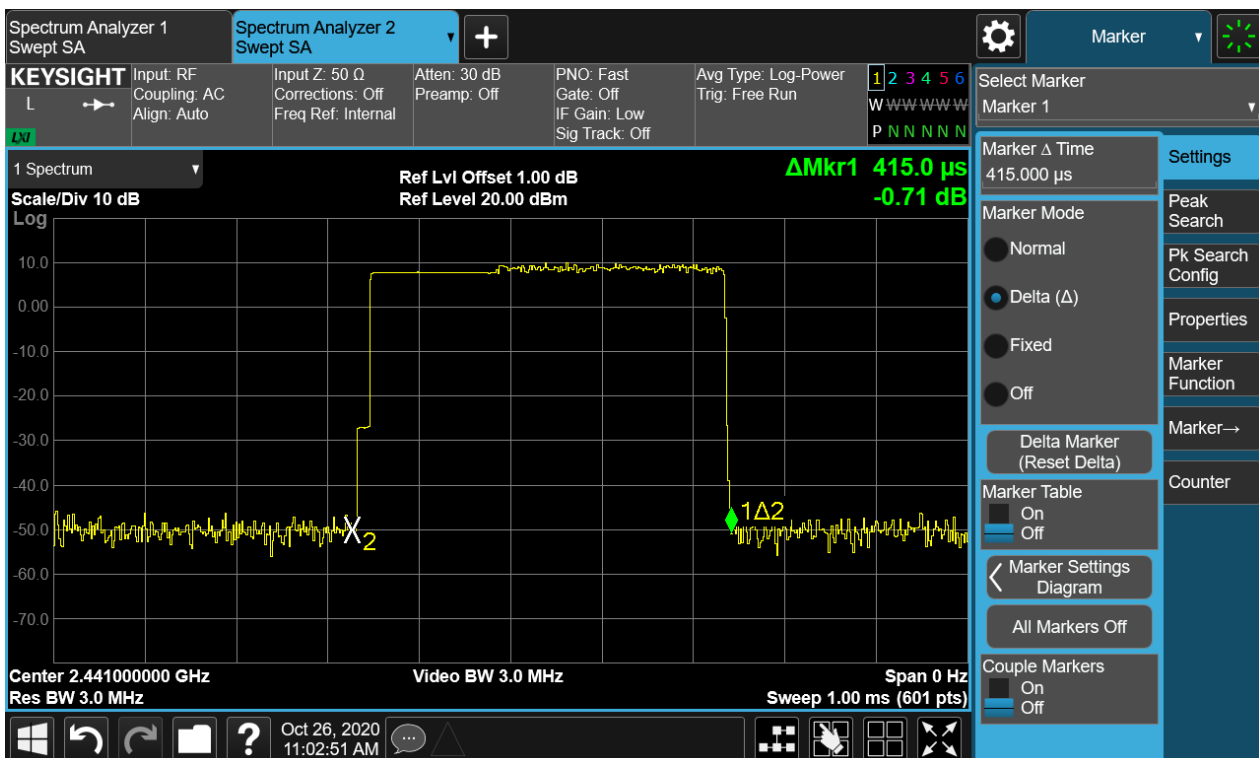

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 46 of 52

Figure 32: Time of Occupancy, 2441MHz, 8-DPSK DH3


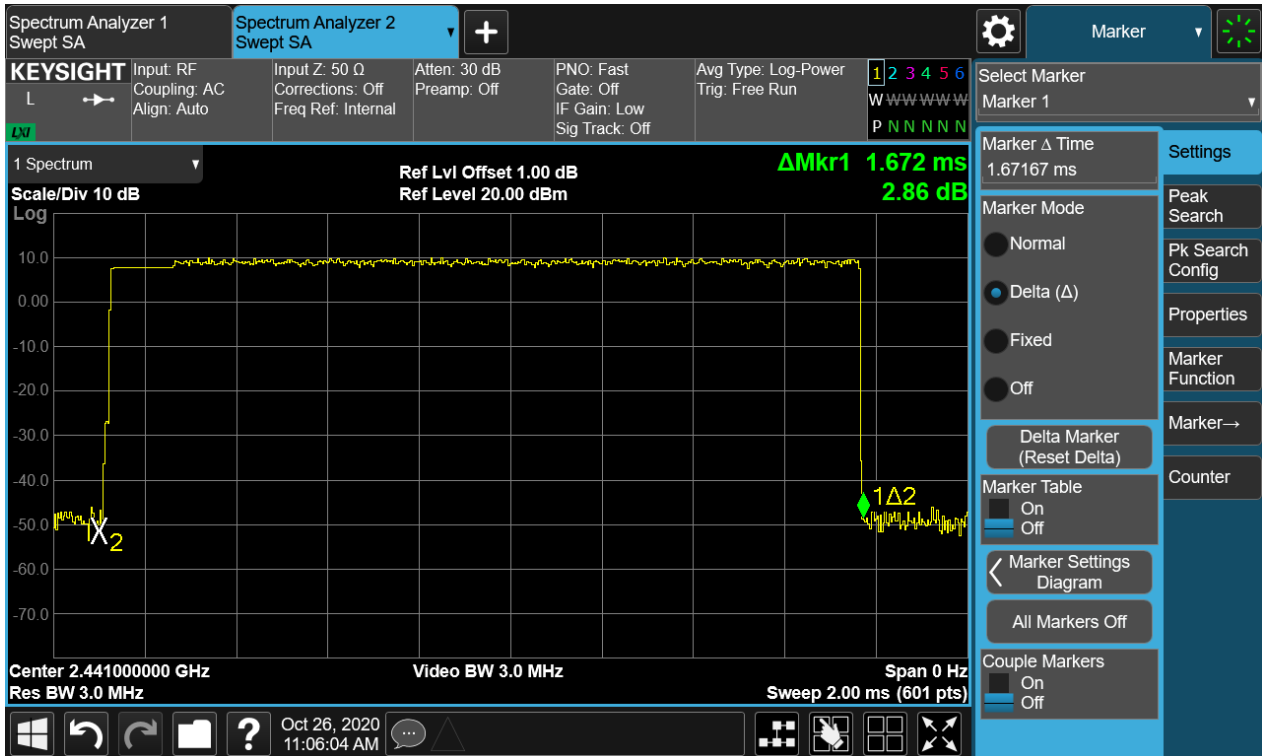


Figure 33: Time of Occupancy, 2441MHz, 8-DPSK DH5

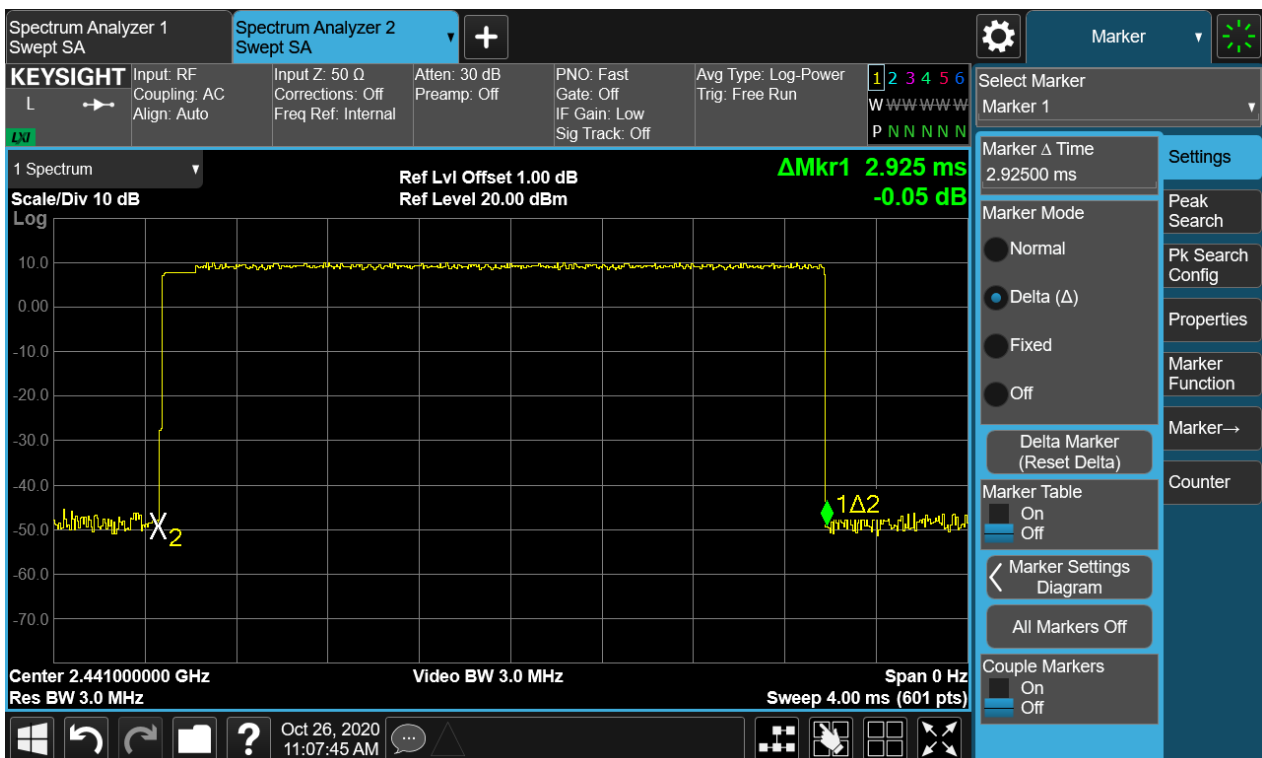

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 47 of 52

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT:

PASS

Test standard	: FCC Part 15.207(a) RSS-Gen 8.8
Requirement	: ANSI C63.10-2013
Kind of test site	: Shielded room

Test setup

Input Voltage	: AC 120V, 60Hz; AC 240V, 50Hz
Operation Mode	: A.1.a
Earthing	: Not Connected
Ambient temperature	: 25°C
Relative humidity	: 52%

For details refer to following test plot.

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15


Page 48 of 52

Note:

The all configurations were tested respectively, but only the worst configuration shown here.

Figure 34: Conducted Emission on AC Mains, L Phase

CEmission Test case_FCC_CE_FCC PART 15B_ Class B

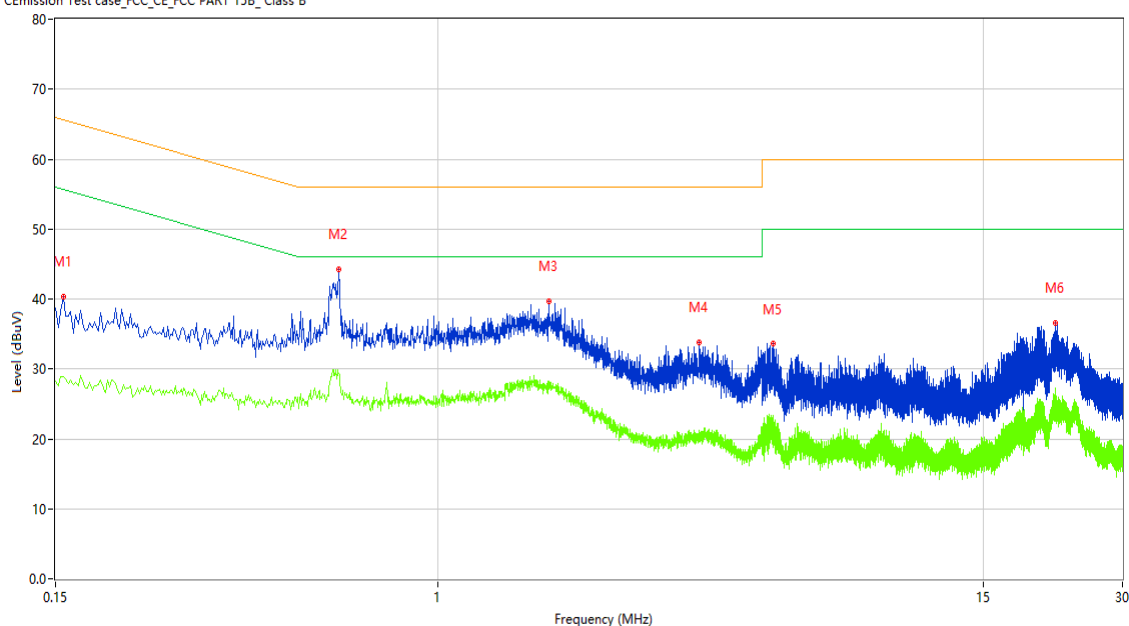

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.156	38.45	9.64	65.67	-27.22	Peak	L	Pass
1*	0.156	32.43	9.64	65.67	-33.24	QP	L	Pass
1**	0.156	28.91	9.64	55.67	-26.76	AV	L	Pass
2	0.612	42.67	9.74	56.00	-13.33	Peak	L	Pass
2*	0.612	38.18	9.74	56.00	-17.82	QP	L	Pass
2**	0.612	29.43	9.74	46.00	-16.57	AV	L	Pass
3	1.736	34.62	9.67	56.00	-21.38	Peak	L	Pass
3*	1.736	26.93	9.67	56.00	-29.07	QP	L	Pass
3**	1.736	27.41	9.67	46.00	-18.59	AV	L	Pass
4	3.660	32.00	9.68	56.00	-24.00	Peak	L	Pass
4*	3.660	25.26	9.68	56.00	-30.74	QP	L	Pass
4**	3.660	21.24	9.68	46.00	-24.76	AV	L	Pass
5	5.288	34.29	9.70	60.00	-25.71	Peak	L	Pass
5*	5.288	26.95	9.70	60.00	-33.05	QP	L	Pass
5**	5.288	23.19	9.70	50.00	-26.81	AV	L	Pass
6	21.506	36.31	9.42	60.00	-23.69	Peak	L	Pass
6*	21.506	29.92	9.42	60.00	-30.08	QP	L	Pass
6**	21.506	27.19	9.42	50.00	-22.81	AV	L	Pass

TEST REPORT


Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 49 of 52

Figure 35: Conducted Emission on AC Mains, N Phase

C:Emission Test case_FCC_CE_FCC PART 15B_Class B

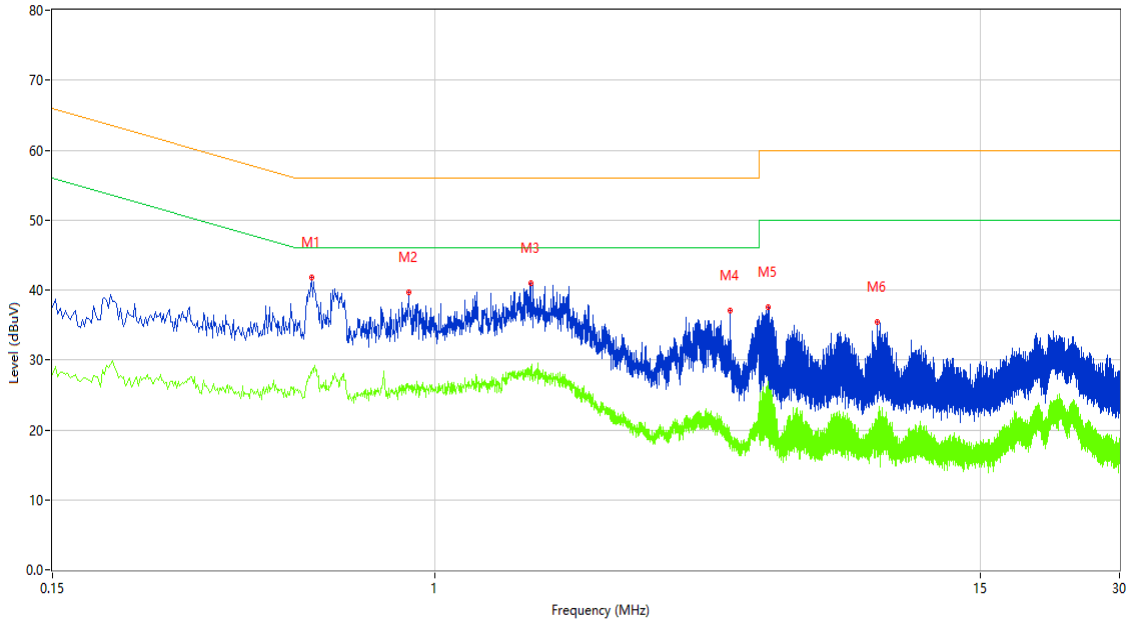

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.544	37.13	9.75	56.00	-18.87	Peak	N	Pass
1*	0.544	31.57	9.75	56.00	-24.43	QP	N	Pass
1**	0.544	28.05	9.75	46.00	-17.95	AV	N	Pass
2	0.878	36.17	9.76	56.00	-19.83	Peak	N	Pass
2*	0.878	30.00	9.76	56.00	-26.00	QP	N	Pass
2**	0.878	25.95	9.76	46.00	-20.05	AV	N	Pass
3	1.610	39.41	9.67	56.00	-16.59	Peak	N	Pass
3*	1.610	32.13	9.67	56.00	-23.87	QP	N	Pass
3**	1.610	28.91	9.67	46.00	-17.09	AV	N	Pass
4	4.348	34.44	9.69	56.00	-21.56	Peak	N	Pass
4*	4.348	26.71	9.69	56.00	-29.29	QP	N	Pass
4**	4.348	19.27	9.69	46.00	-26.73	AV	N	Pass
5	5.242	40.49	9.70	60.00	-19.51	Peak	N	Pass
5*	5.242	32.53	9.70	60.00	-27.47	QP	N	Pass
5**	5.242	26.90	9.70	50.00	-23.10	AV	N	Pass
6	9.006	35.12	9.67	60.00	-24.88	Peak	N	Pass
6*	9.006	27.26	9.67	60.00	-32.74	QP	N	Pass
6**	9.006	21.44	9.67	50.00	-28.56	AV	N	Pass

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 50 of 52

5 Appendixes

5.1 Photographs of the Sample



Front of the sample



Rear of the sample

TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 51 of 52

5.2 Set-up for Conducted Emissions



5.3 Set-up for Conducted RF test at Antenna Port



TEST REPORT

Report No.: SHE20060042-02HE

Date: 2021-01-15

Page 52 of 52

5.4 Set-up for Spurious Emissions below 1GHz



Below 1 GHz

5.5 Set-up for Spurious Emissions above 1GHz



Above 1GHz

End of the report