



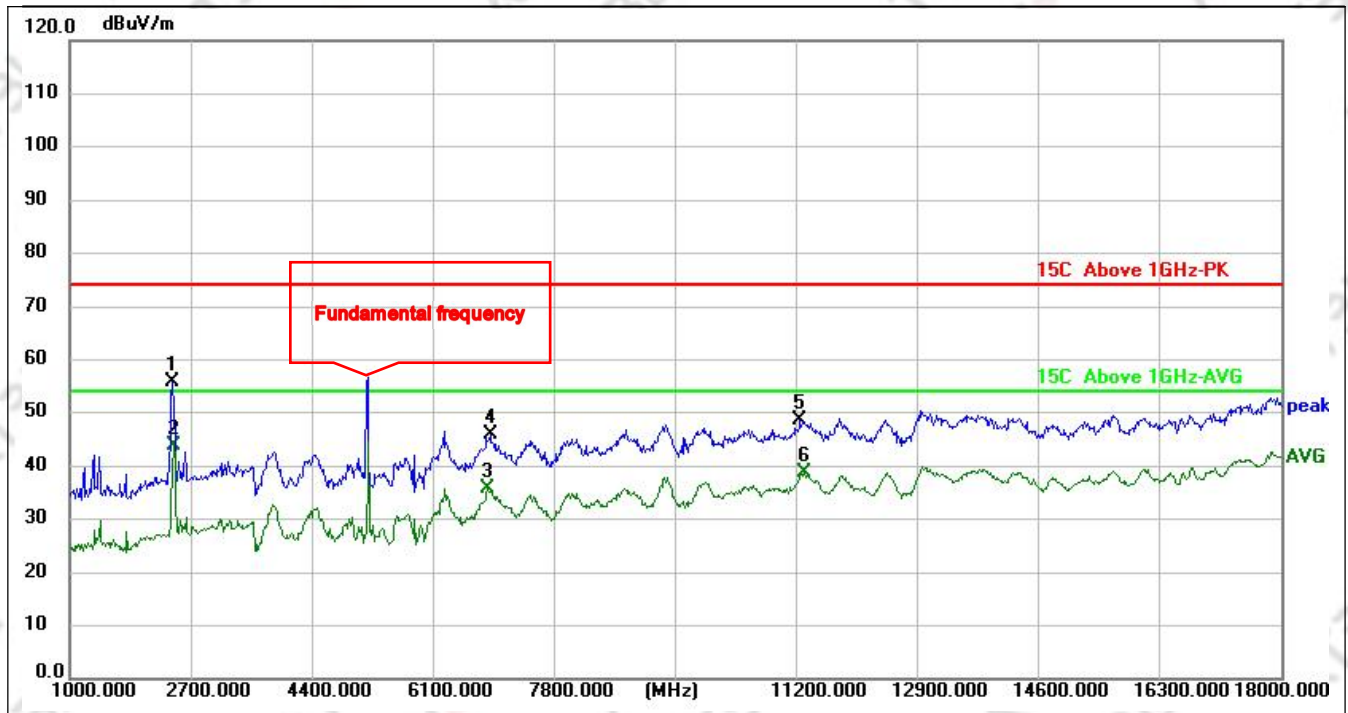

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:26:06
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH40 5200	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	71.24	-15.55	55.69	74.00	-18.31	peak	150	0	
2 *	2462.000	59.24	-15.44	43.80	54.00	-10.20	AVG	150	0	
3	6865.000	36.28	-0.44	35.84	54.00	-18.16	AVG	150	0	
4	6899.000	46.17	-0.38	45.79	74.00	-28.21	peak	150	0	
5	11251.000	41.31	7.45	48.76	74.00	-25.24	peak	150	0	
6	11302.000	31.08	7.56	38.64	54.00	-15.36	AVG	150	0	


*:Maximum data x:Over limit !:over margin

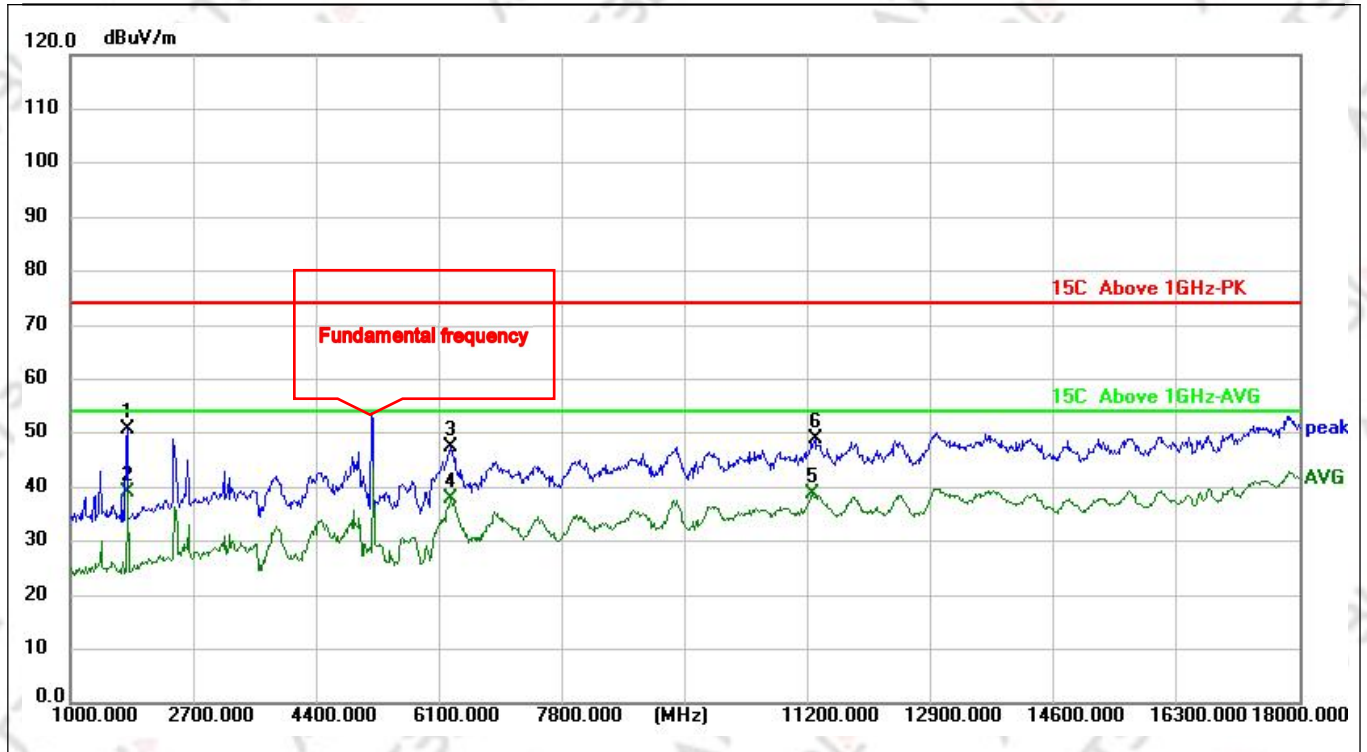

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:28:50
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH40 5200	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	1782.000	70.11	-19.48	50.63	74.00	-23.37	peak	150	360	
2 *	1799.000	58.50	-19.45	39.05	54.00	-14.95	AVG	150	360	
3	6253.000	49.18	-1.79	47.39	74.00	-26.61	peak	150	360	
4	6253.000	39.52	-1.79	37.73	54.00	-16.27	AVG	150	360	
5	11268.000	31.17	7.48	38.65	54.00	-15.35	AVG	150	360	
6	11302.000	41.28	7.56	48.84	74.00	-25.16	peak	150	360	


*:Maximum data x:Over limit !:over margin

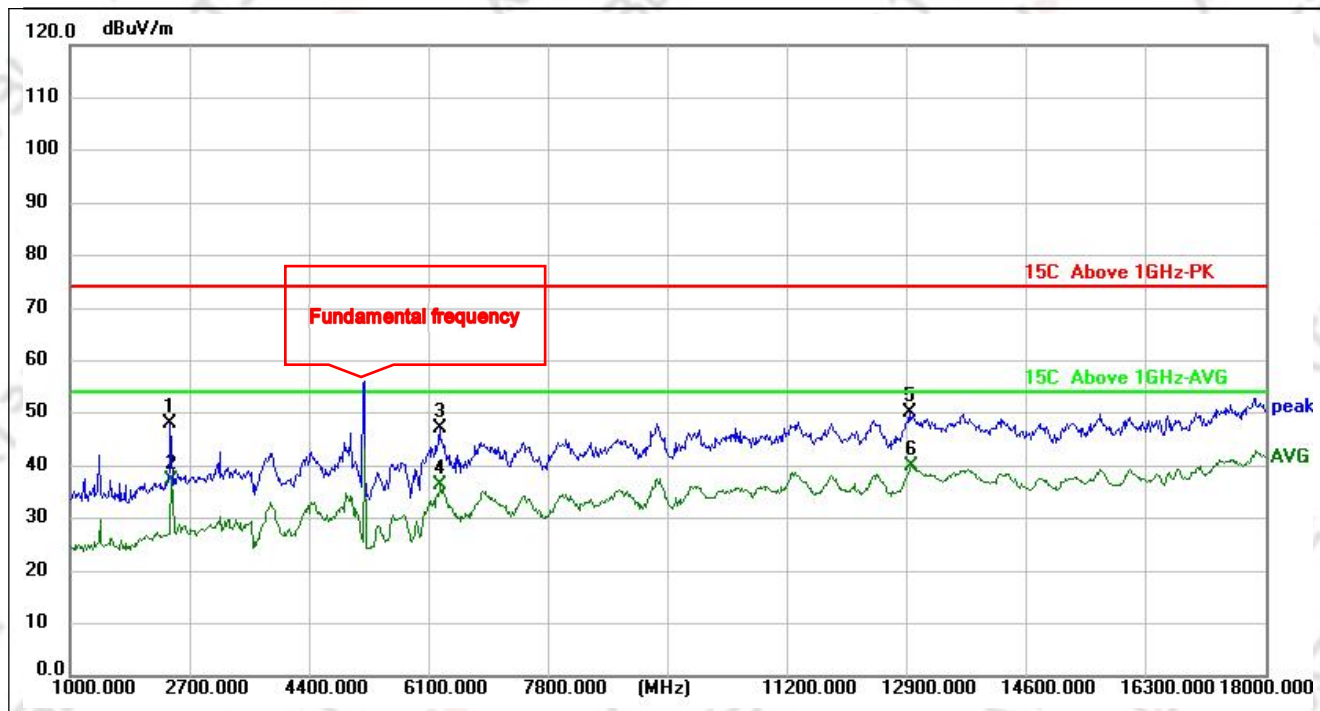

Site:		Antenna:Vertical	Temperature(°C):25(°C)
Limit:	15C Above 1GHz-PK		Humidity(%):53%
EUT:	BE3600 Router	Test Time:	2025/9/26 16:30:41
M/N.:	FX21-BE36	Power Rating:	DC12V
Mode:	5G_BE20_CH48 5200	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2428.000	63.56	-15.67	47.89	74.00	-26.11	peak	150	360	
2	2445.000	52.70	-15.55	37.15	54.00	-16.85	AVG	150	360	
3	6253.000	49.07	-1.79	47.28	74.00	-26.72	peak	150	360	
4	6270.000	38.19	-1.75	36.44	54.00	-17.56	AVG	150	360	
5	12934.000	40.36	9.65	50.01	74.00	-23.99	peak	150	360	
6 *	12968.000	30.14	9.72	39.86	54.00	-14.14	AVG	150	360	


*:Maximum data x:Over limit !:over margin

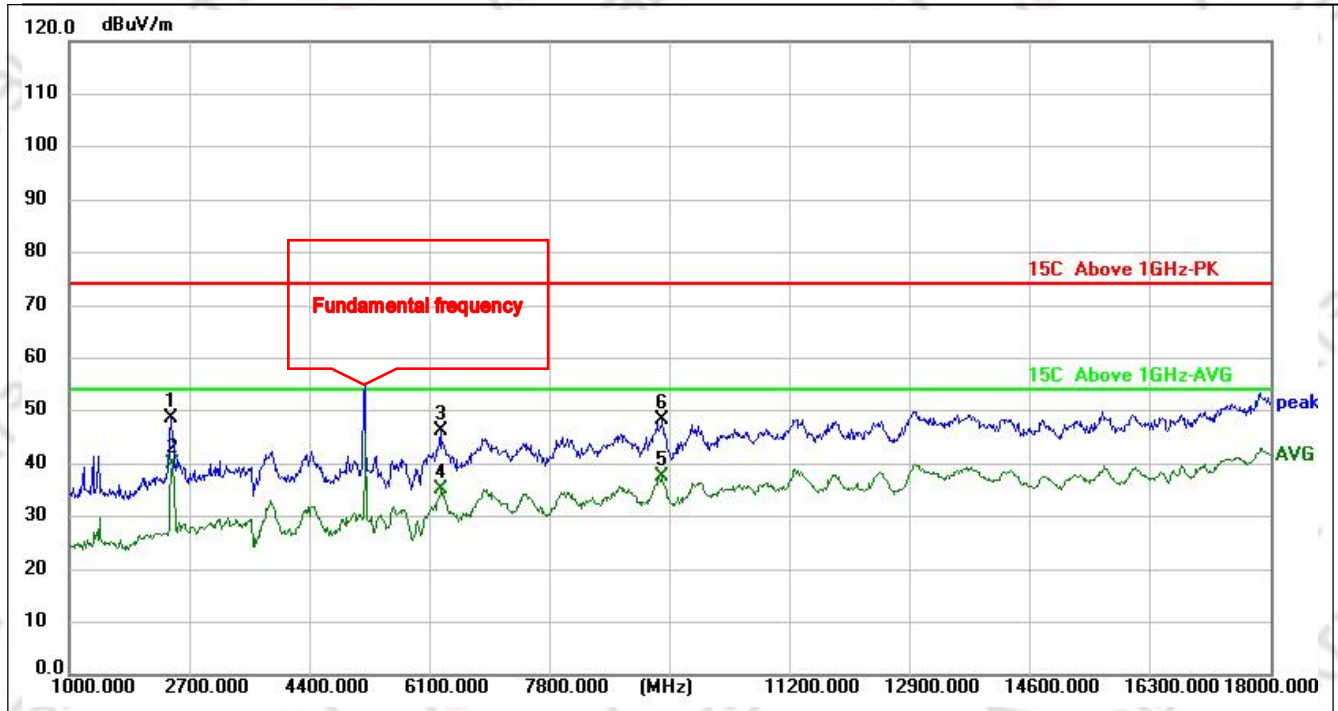

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:32:14
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH48 5200	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	64.11	-15.55	48.56	74.00	-25.44	peak	150	180	
2 *	2462.000	55.27	-15.44	39.83	54.00	-14.17	AVG	150	180	
3	6253.000	47.92	-1.79	46.13	74.00	-27.87	peak	150	180	
4	6270.000	37.06	-1.75	35.31	54.00	-18.69	AVG	150	180	
5	9381.000	33.54	4.05	37.59	54.00	-16.41	AVG	150	180	
6	9398.000	44.14	4.08	48.22	74.00	-25.78	peak	150	180	


*:Maximum data x:Over limit !:over margin

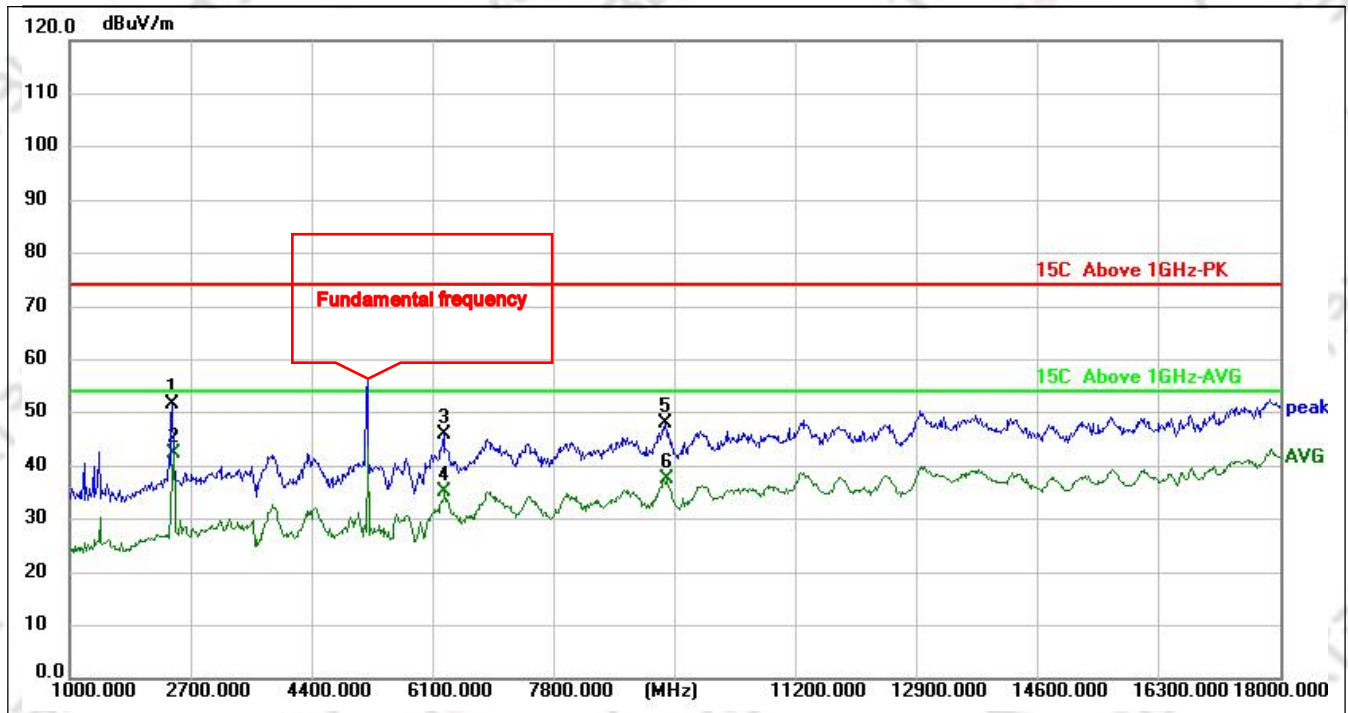

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:36:36
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH52 5260	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	67.03	-15.55	51.48	74.00	-22.52	peak	150	0	
2 *	2462.000	57.90	-15.44	42.46	54.00	-11.54	AVG	150	0	
3	6253.000	47.68	-1.79	45.89	74.00	-28.11	peak	150	0	
4	6270.000	36.77	-1.75	35.02	54.00	-18.98	AVG	150	0	
5	9364.000	44.00	4.03	48.03	74.00	-25.97	peak	150	0	
6	9381.000	33.64	4.05	37.69	54.00	-16.31	AVG	150	0	


*:Maximum data x:Over limit !:over margin

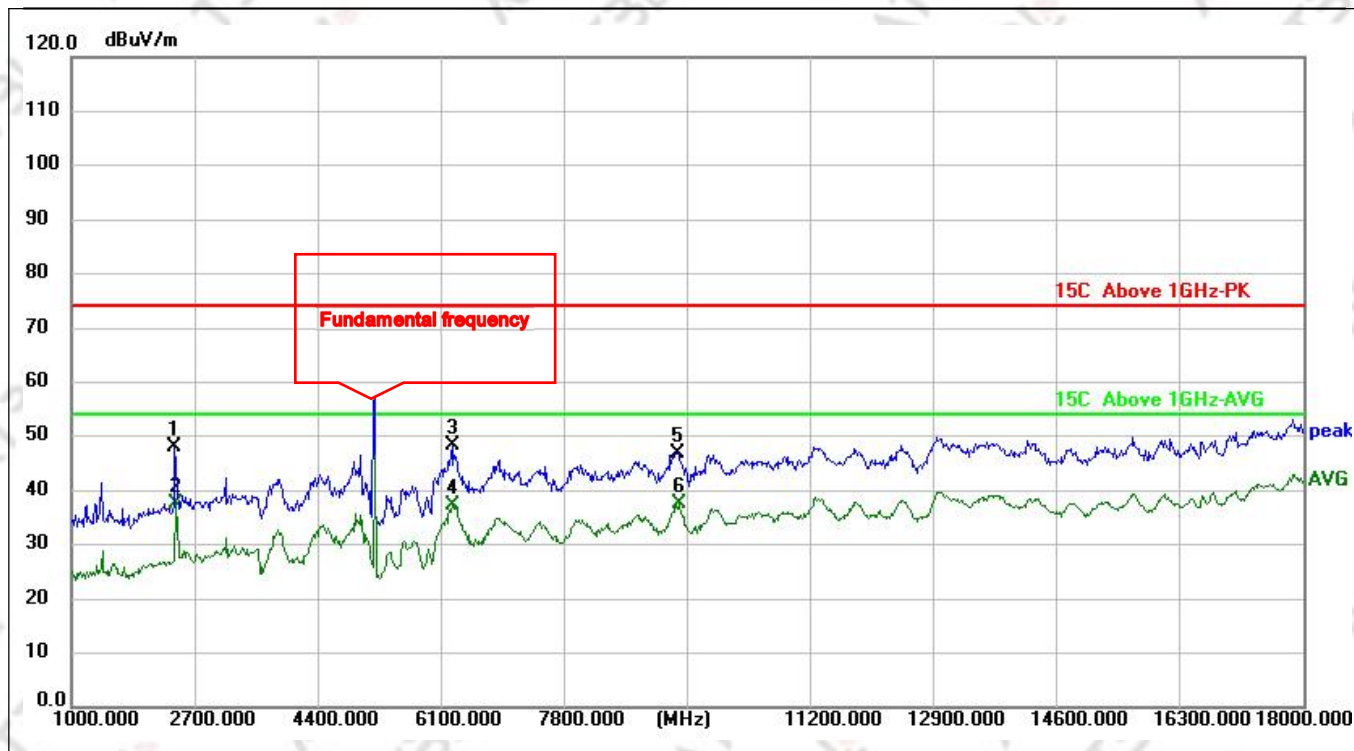

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:38:18
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH52 5260	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2428.000	63.68	-15.67	48.01	74.00	-25.99	peak	150	180	
2	2445.000	53.10	-15.55	37.55	54.00	-16.45	AVG	150	180	
3	6253.000	50.08	-1.79	48.29	74.00	-25.71	peak	150	180	
4	6253.000	39.15	-1.79	37.36	54.00	-16.64	AVG	150	180	
5	9364.000	42.87	4.03	46.90	74.00	-27.10	peak	150	180	
6 *	9381.000	33.51	4.05	37.56	54.00	-16.44	AVG	150	180	


*:Maximum data x:Over limit !:over margin

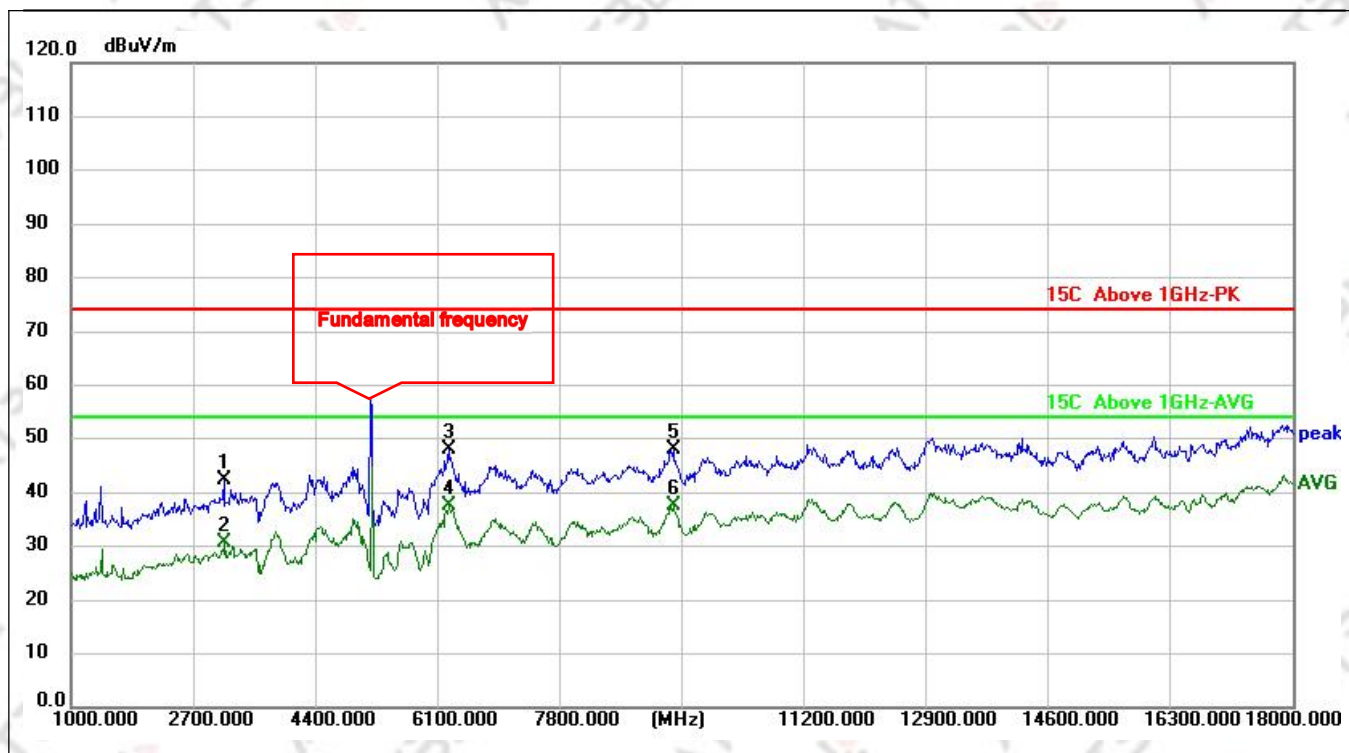

Site:		Antenna:Vertical	Temperature(°C):25(°C)
Limit:	15C Above 1GHz-PK		Humidity(%):53%
EUT:	BE3600 Router	Test Time:	2025/9/26 16:40:33
M/N.:	FX21-BE36	Power Rating:	DC12V
Mode:	5G_BE20_CH60 5300	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3125.000	54.39	-12.01	42.38	74.00	-31.62	peak	150	0	
2	3142.000	42.77	-11.96	30.81	54.00	-23.19	AVG	150	0	
3	6253.000	49.78	-1.79	47.99	74.00	-26.01	peak	150	0	
4 *	6270.000	39.41	-1.75	37.66	54.00	-16.34	AVG	150	0	
5	9381.000	43.98	4.05	48.03	74.00	-25.97	peak	150	0	
6	9381.000	33.49	4.05	37.54	54.00	-16.46	AVG	150	0	


*:Maximum data x:Over limit !:over margin

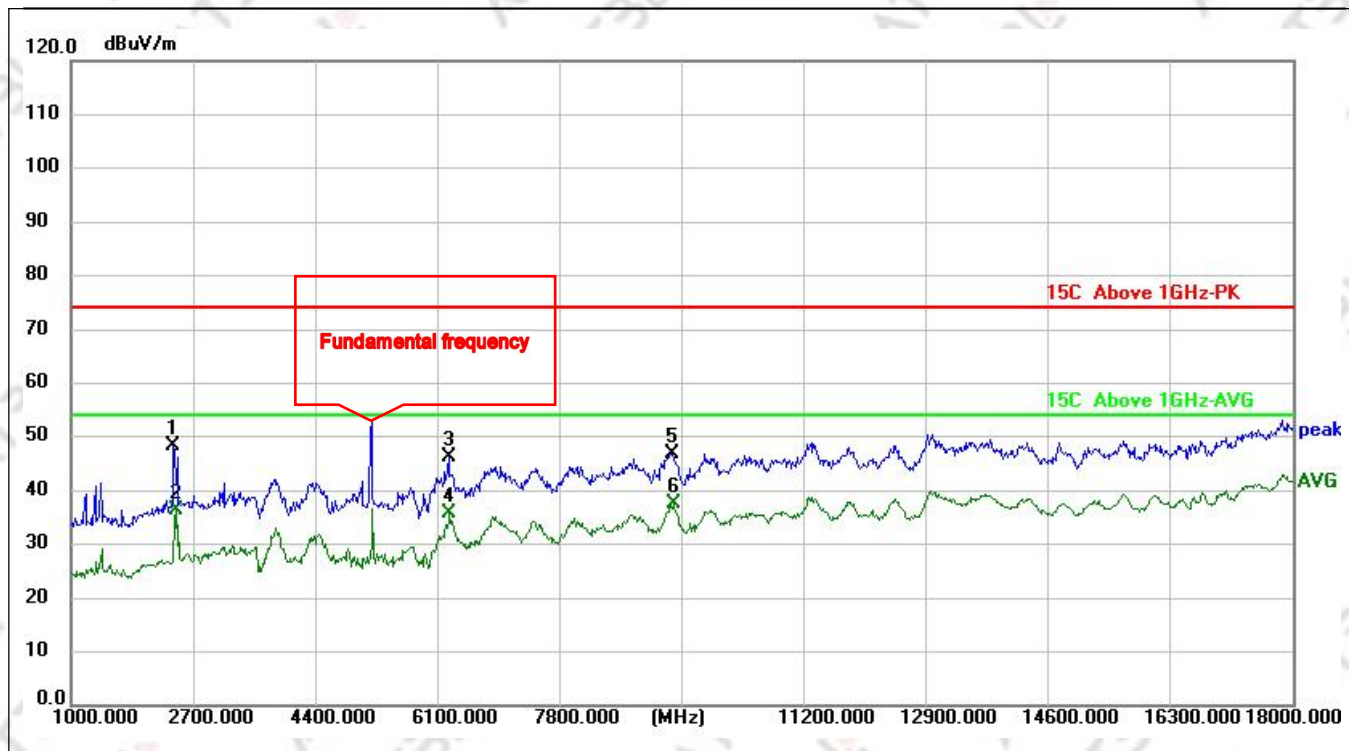

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:42:20
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH60 5300	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2428.000	63.88	-15.67	48.21	74.00	-25.79	peak	150	0	
2	2462.000	51.88	-15.44	36.44	54.00	-17.56	AVG	150	0	
3	6253.000	47.90	-1.79	46.11	74.00	-27.89	peak	150	0	
4	6270.000	37.39	-1.75	35.64	54.00	-18.36	AVG	150	0	
5	9364.000	42.83	4.03	46.86	74.00	-27.14	peak	150	0	
6 *	9381.000	33.36	4.05	37.41	54.00	-16.59	AVG	150	0	


*:Maximum data x:Over limit !:over margin

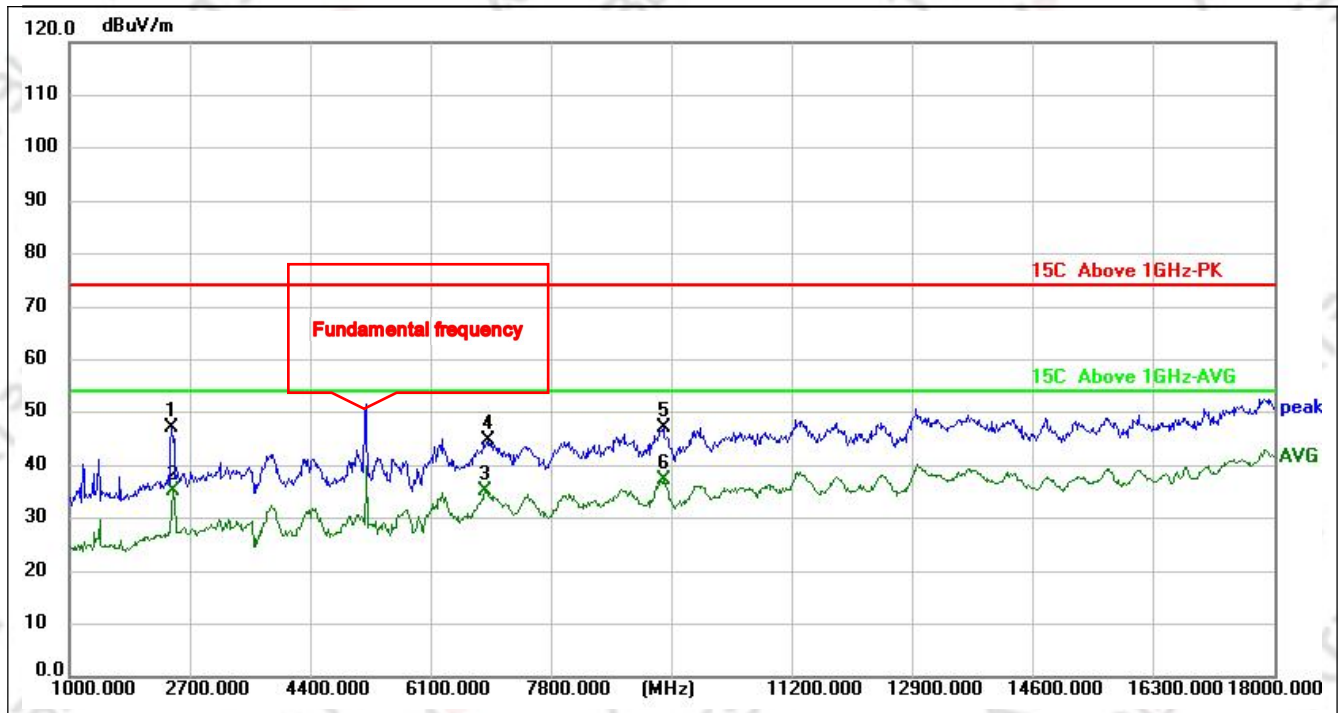

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:44:39
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH64 5320	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	62.54	-15.55	46.99	74.00	-27.01	peak	150	0	
2	2462.000	50.74	-15.44	35.30	54.00	-18.70	AVG	150	0	
3	6865.000	35.63	-0.44	35.19	54.00	-18.81	AVG	150	0	
4	6916.000	45.15	-0.35	44.80	74.00	-29.20	peak	150	0	
5	9381.000	43.12	4.05	47.17	74.00	-26.83	peak	150	0	
6 *	9381.000	33.33	4.05	37.38	54.00	-16.62	AVG	150	0	


*:Maximum data x:Over limit !:over margin

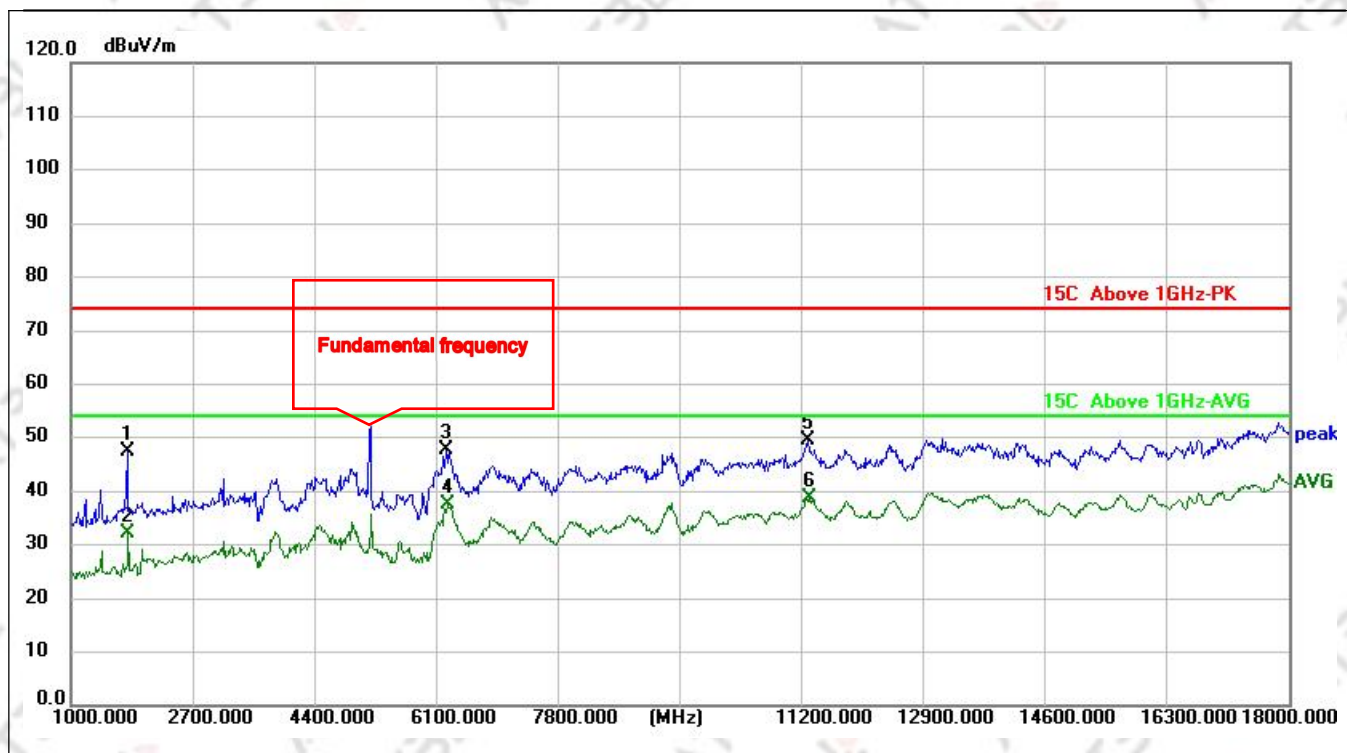

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:47:09
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH64 5320	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	1782.000	66.84	-19.48	47.36	74.00	-26.64	peak	150	180	
2	1799.000	51.47	-19.45	32.02	54.00	-21.98	AVG	150	180	
3	6236.000	49.44	-1.84	47.60	74.00	-26.40	peak	150	180	
4	6270.000	39.36	-1.75	37.61	54.00	-16.39	AVG	150	180	
5	11285.000	41.87	7.53	49.40	74.00	-24.60	peak	150	180	
6 *	11302.000	31.24	7.56	38.80	54.00	-15.20	AVG	150	180	


*:Maximum data x:Over limit !:over margin

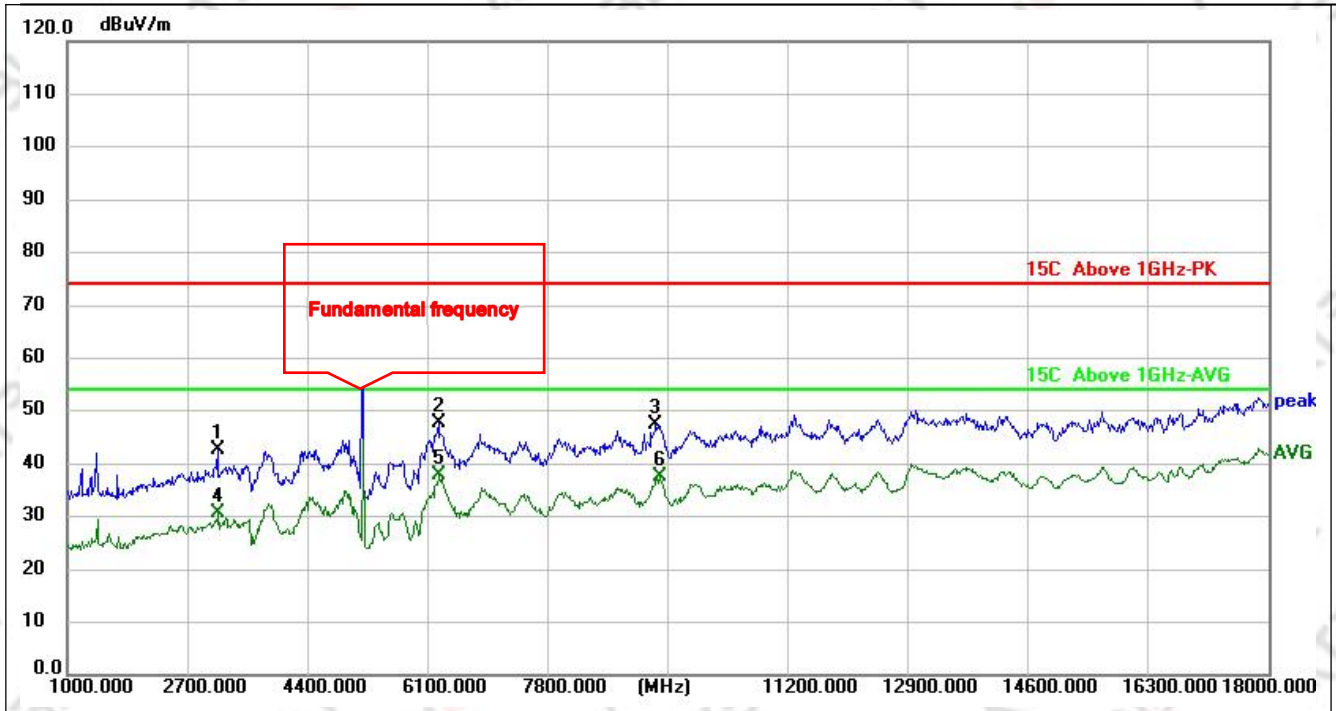

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:49:08
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH100 5500	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3125.000	54.54	-12.01	42.53	74.00	-31.47	peak	150	0	
2	6253.000	49.47	-1.79	47.68	74.00	-26.32	peak	150	0	
3	9330.000	43.42	3.99	47.41	74.00	-26.59	peak	150	0	
4	3142.000	42.60	-11.96	30.64	54.00	-23.36	AVG	150	0	
5 *	6270.000	39.47	-1.75	37.72	54.00	-16.28	AVG	150	0	
6	9381.000	33.52	4.05	37.57	54.00	-16.43	AVG	150	0	


*:Maximum data x:Over limit !:over margin

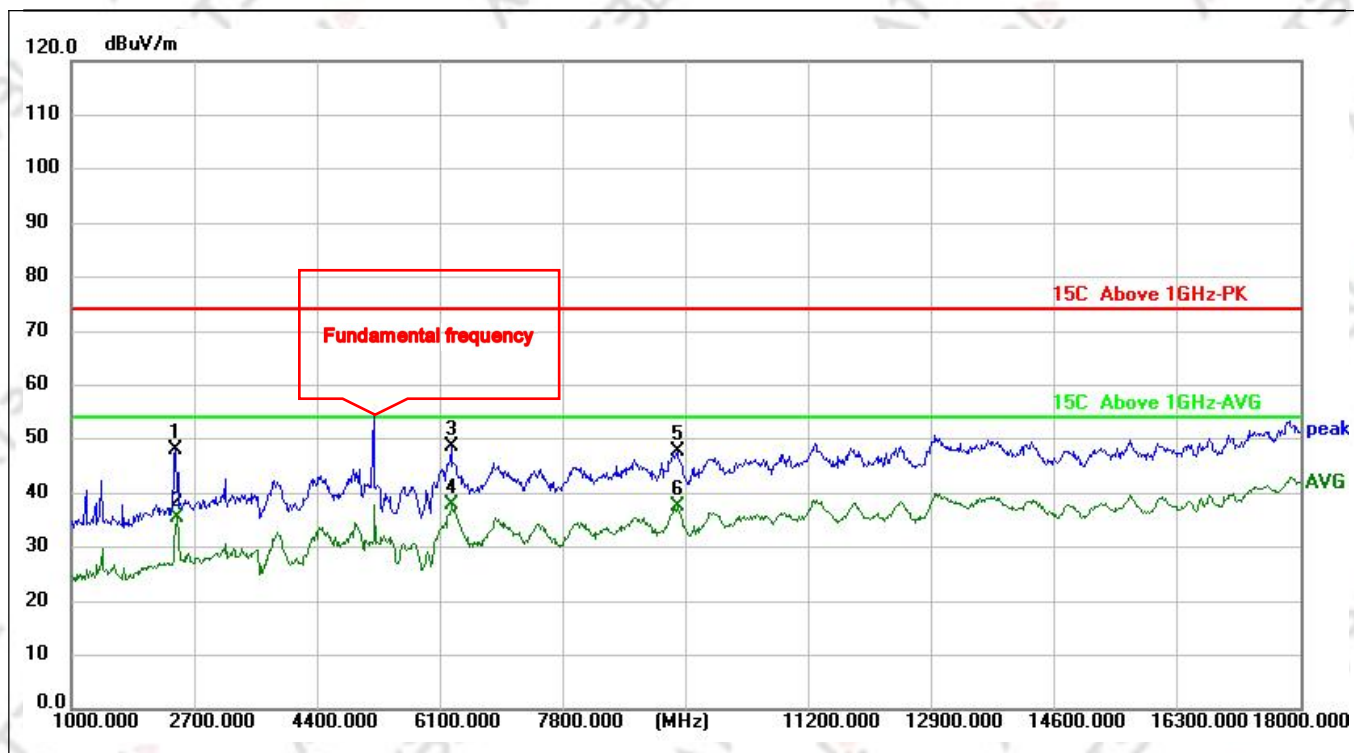

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:50:54
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH100 5500	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	63.66	-15.55	48.11	74.00	-25.89	peak	150	0	
2	2462.000	50.80	-15.44	35.36	54.00	-18.64	AVG	150	0	
3	6253.000	50.55	-1.79	48.76	74.00	-25.24	peak	150	0	
4 *	6270.000	39.47	-1.75	37.72	54.00	-16.28	AVG	150	0	
5	9381.000	43.72	4.05	47.77	74.00	-26.23	peak	150	0	
6	9381.000	33.56	4.05	37.61	54.00	-16.39	AVG	150	0	


*:Maximum data x:Over limit !:over margin

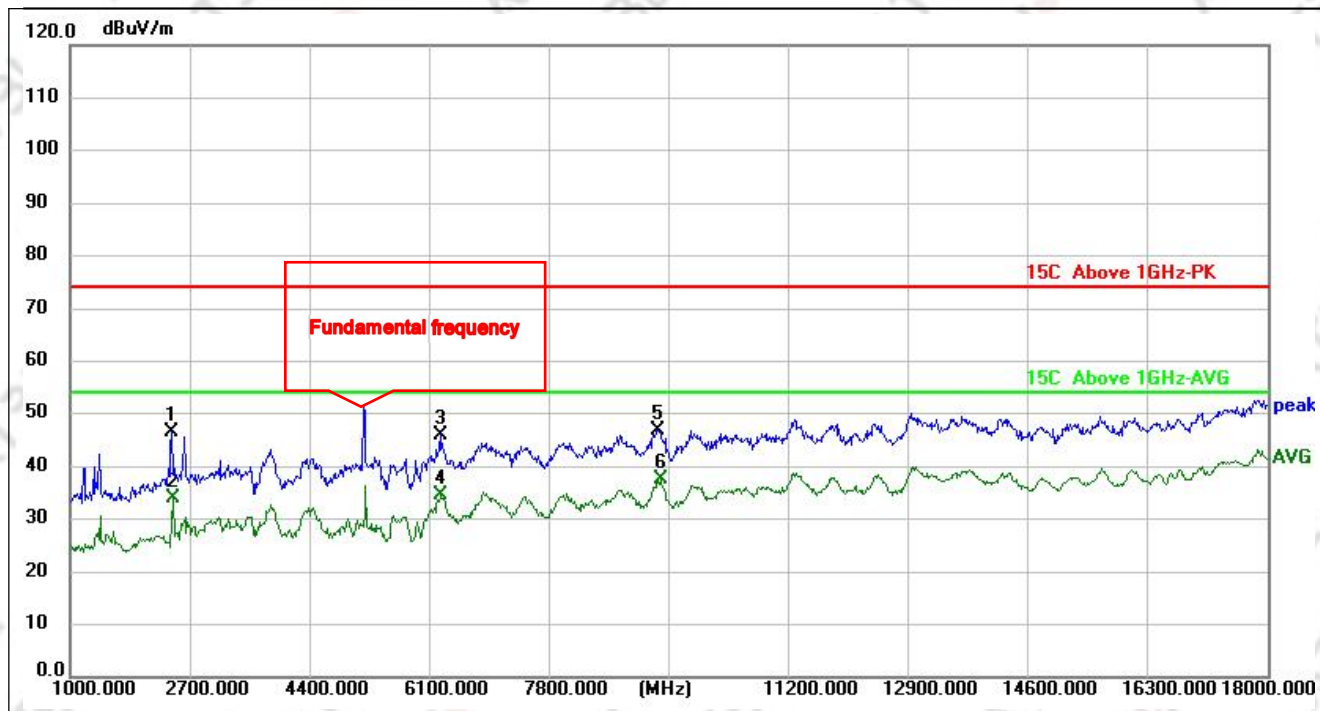

Site:		Antenna: Horizontal	Temperature(°C): 25(°C)
Limit:	15C Above 1GHz-PK		Humidity(%): 53%
EUT:	BE3600 Router	Test Time:	2025/9/26 16:53:11
M/N.:	FX21-BE36	Power Rating:	DC12V
Mode:	5G_BE20_CH116 5580	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	62.19	-15.55	46.64	74.00	-27.36	peak	150	0	
2	2462.000	49.45	-15.44	34.01	54.00	-19.99	AVG	150	0	
3	6253.000	47.77	-1.79	45.98	74.00	-28.02	peak	150	0	
4	6270.000	36.45	-1.75	34.70	54.00	-19.30	AVG	150	0	
5	9347.000	42.85	4.02	46.87	74.00	-27.13	peak	150	0	
6 *	9381.000	33.49	4.05	37.54	54.00	-16.46	AVG	150	0	


*:Maximum data x:Over limit !:over margin

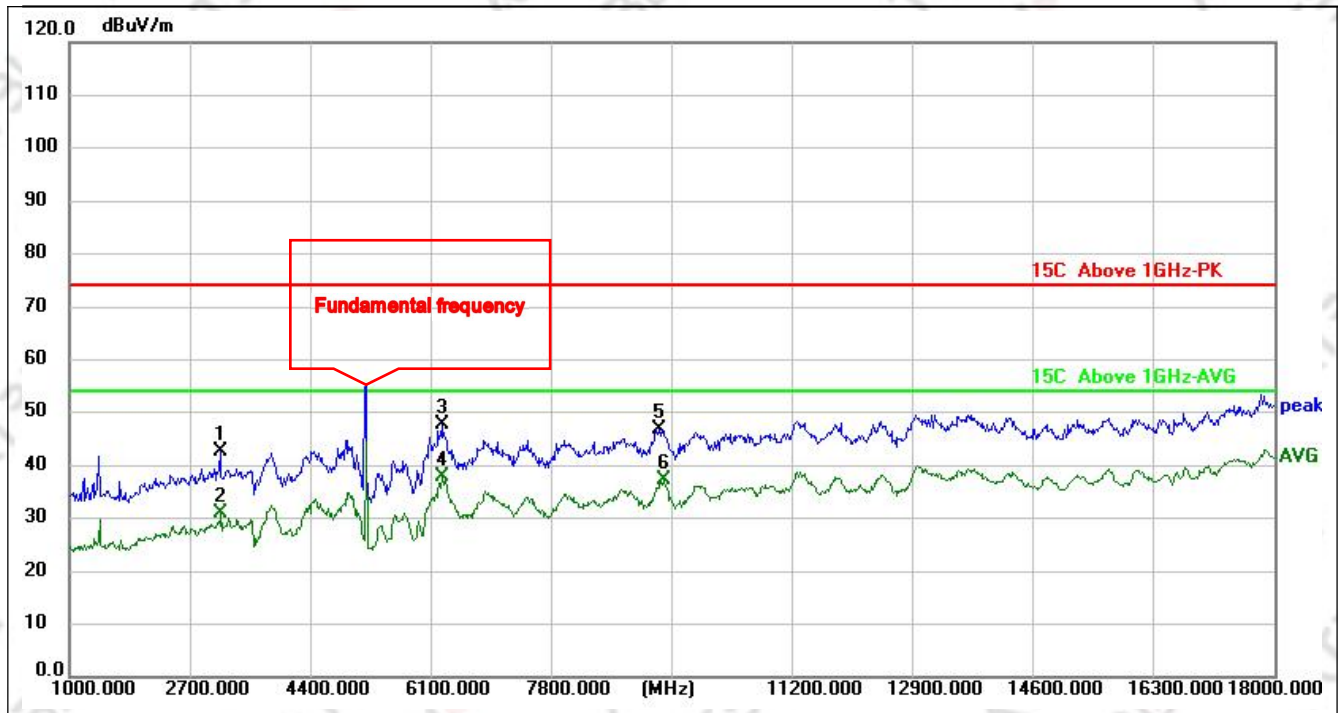

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:55:09
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH116 5580	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3125.000	54.52	-12.01	42.51	74.00	-31.49	peak	150	180	
2	3142.000	42.81	-11.96	30.85	54.00	-23.15	AVG	150	180	
3	6253.000	49.63	-1.79	47.84	74.00	-26.16	peak	150	180	
4 *	6270.000	39.66	-1.75	37.91	54.00	-16.09	AVG	150	180	
5	9330.000	42.92	3.99	46.91	74.00	-27.09	peak	150	180	
6	9381.000	33.32	4.05	37.37	54.00	-16.63	AVG	150	180	


*:Maximum data x:Over limit !:over margin

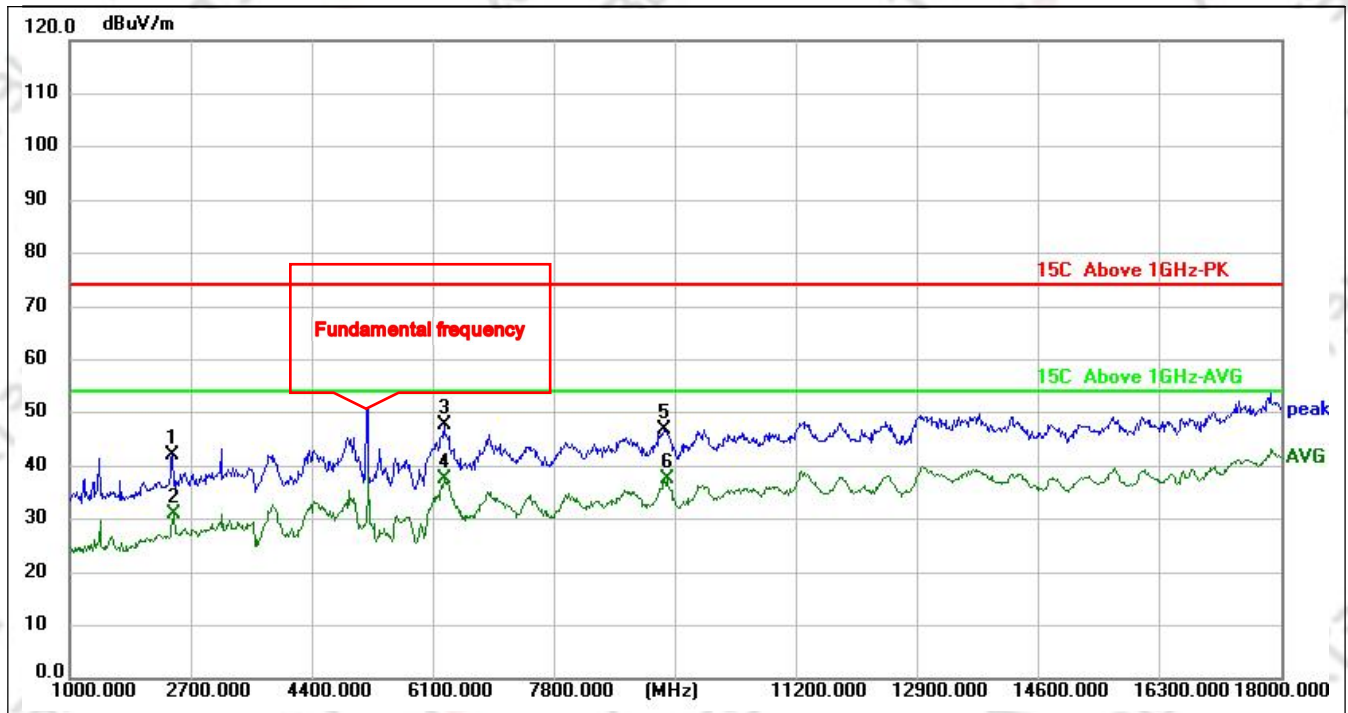

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 16:56:59
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH140 5700	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	57.66	-15.55	42.11	74.00	-31.89	peak	150	0	
2	2462.000	46.28	-15.44	30.84	54.00	-23.16	AVG	150	0	
3	6253.000	49.51	-1.79	47.72	74.00	-26.28	peak	150	0	
4 *	6253.000	39.27	-1.79	37.48	54.00	-16.52	AVG	150	0	
5	9347.000	42.75	4.02	46.77	74.00	-27.23	peak	150	0	
6	9381.000	33.41	4.05	37.46	54.00	-16.54	AVG	150	0	


*:Maximum data x:Over limit !:over margin

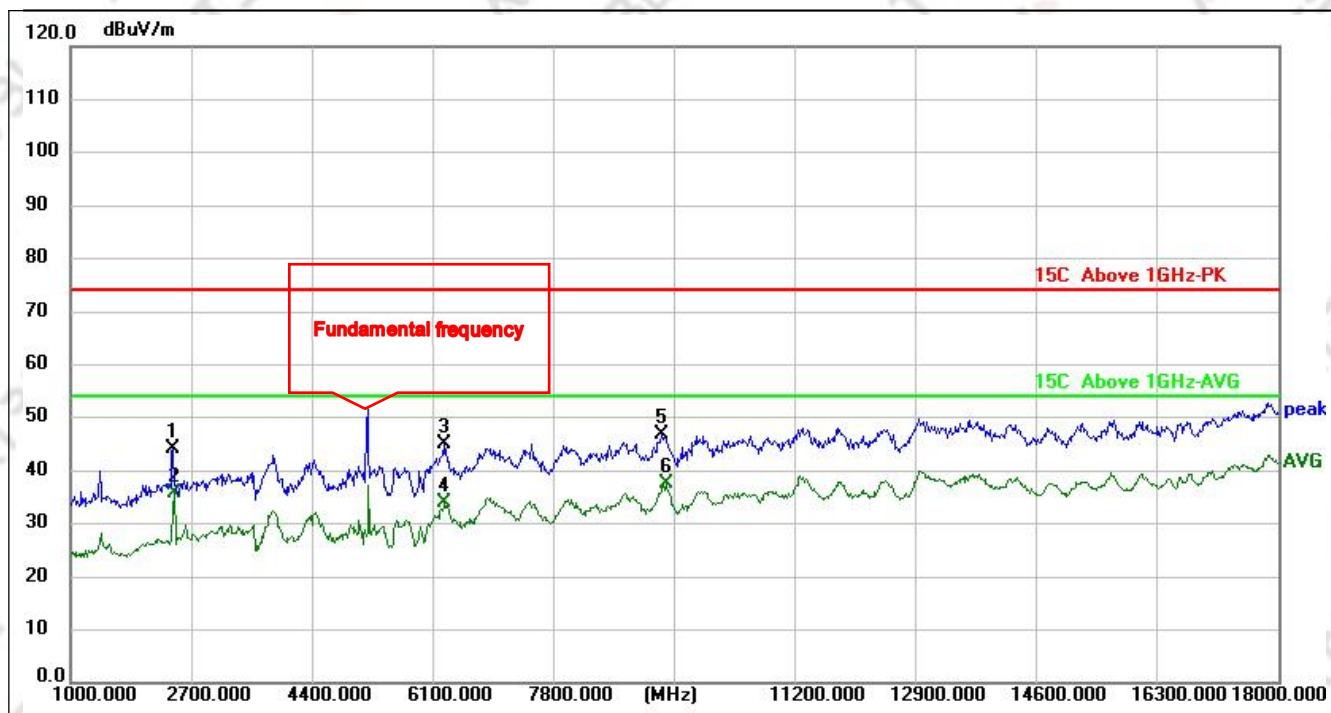

Site:		Antenna: Horizontal	Temperature(°C): 25(°C)
Limit:	15C Above 1GHz-PK		Humidity(%): 53%
EUT:	BE3600 Router	Test Time:	2025/9/26 16:58:38
M/N.:	FX21-BE36	Power Rating:	DC12V
Mode:	5G_BE20_CH140 5700	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	59.74	-15.55	44.19	74.00	-29.81	peak	150	180	
2	2462.000	51.23	-15.44	35.79	54.00	-18.21	AVG	150	180	
3	6253.000	46.93	-1.79	45.14	74.00	-28.86	peak	150	180	
4	6270.000	35.68	-1.75	33.93	54.00	-20.07	AVG	150	180	
5	9330.000	42.74	3.99	46.73	74.00	-27.27	peak	150	180	
6 *	9381.000	33.52	4.05	37.57	54.00	-16.43	AVG	150	180	


*:Maximum data x:Over limit !:over margin

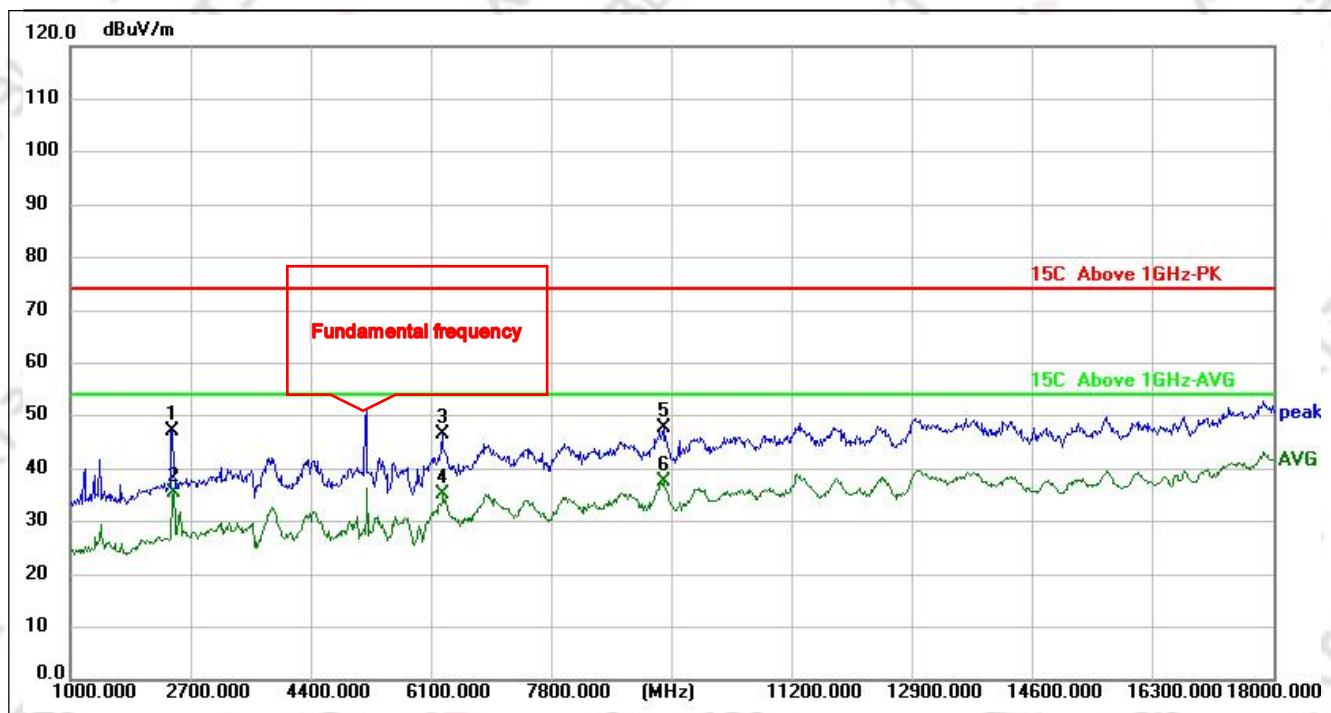

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:00:28
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH149 5745	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	62.83	-15.55	47.28	74.00	-26.72	peak	150	180	
2	2462.000	50.96	-15.44	35.52	54.00	-18.48	AVG	150	180	
3	6253.000	48.41	-1.79	46.62	74.00	-27.38	peak	150	180	
4	6270.000	36.86	-1.75	35.11	54.00	-18.89	AVG	150	180	
5	9381.000	43.80	4.05	47.85	74.00	-26.15	peak	150	180	
6 *	9381.000	33.45	4.05	37.50	54.00	-16.50	AVG	150	180	


*:Maximum data x:Over limit !:over margin

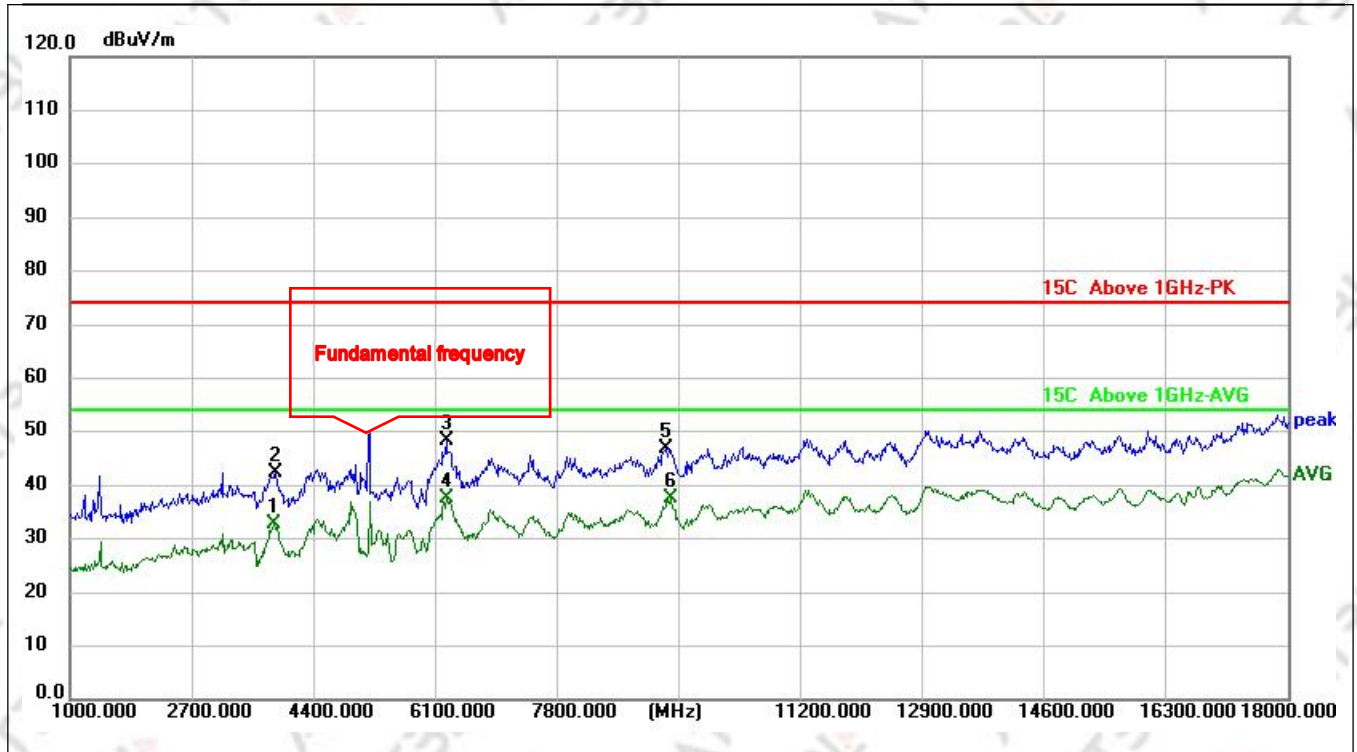

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:02:33
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH149 5745	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3856.000	42.02	-9.26	32.76	54.00	-21.24	AVG	150	0	
2	3873.000	51.49	-9.21	42.28	74.00	-31.72	peak	150	0	
3	6253.000	50.12	-1.79	48.33	74.00	-25.67	peak	150	0	
4	6253.000	39.27	-1.79	37.48	54.00	-16.52	AVG	150	0	
5	9330.000	42.82	3.99	46.81	74.00	-27.19	peak	150	0	
6 *	9381.000	33.50	4.05	37.55	54.00	-16.45	AVG	150	0	


*:Maximum data x:Over limit !:over margin

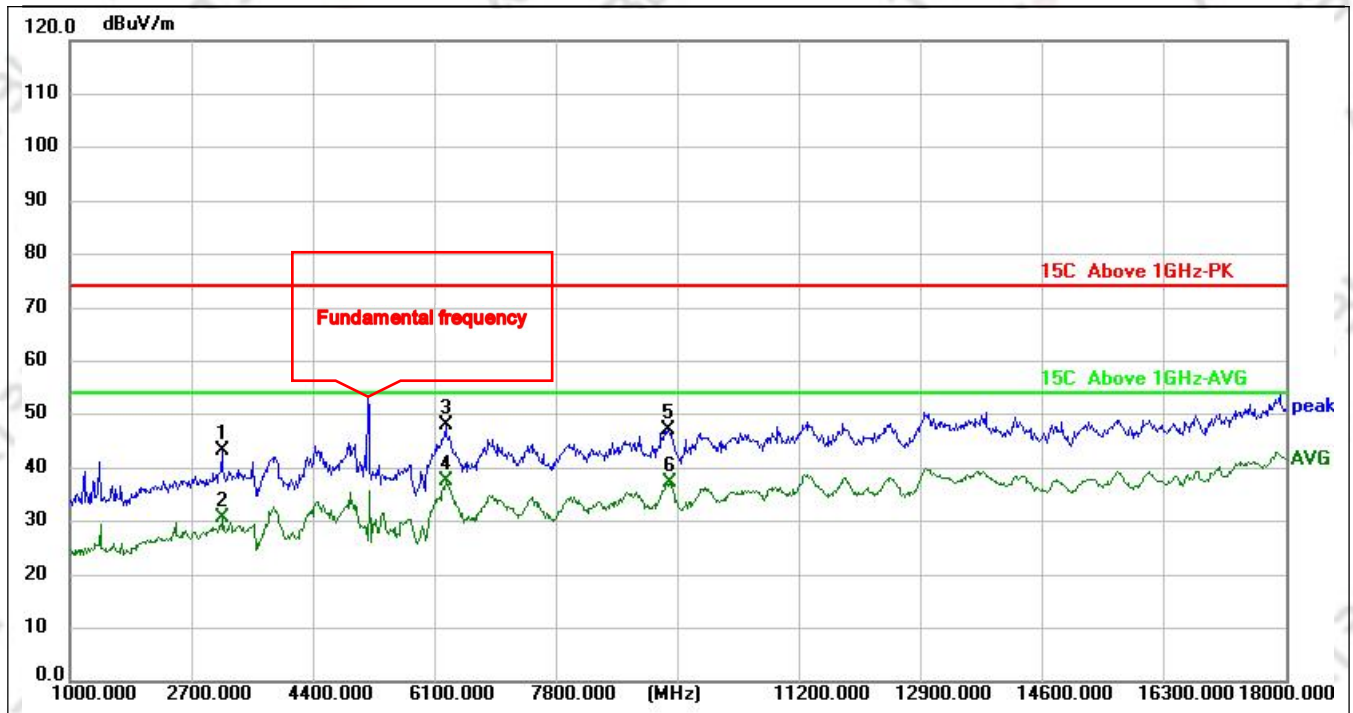

Site:		Antenna:Vertical	Temperature(°C):25(°C)
Limit:	15C Above 1GHz-PK		Humidity(%):53%
EUT:	BE3600 Router	Test Time:	2025/9/26 17:05:00
M/N.:	FX21-BE36	Power Rating:	DC12V
Mode:	5G_BE20_CH157 5785	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3125.000	55.39	-12.01	43.38	74.00	-30.62	peak	150	180	
2	3142.000	42.73	-11.96	30.77	54.00	-23.23	AVG	150	180	
3	6253.000	49.74	-1.79	47.95	74.00	-26.05	peak	150	180	
4 *	6270.000	39.35	-1.75	37.60	54.00	-16.40	AVG	150	180	
5	9364.000	43.13	4.03	47.16	74.00	-26.84	peak	150	180	
6	9381.000	33.23	4.05	37.28	54.00	-16.72	AVG	150	180	


*:Maximum data x:Over limit !:over margin

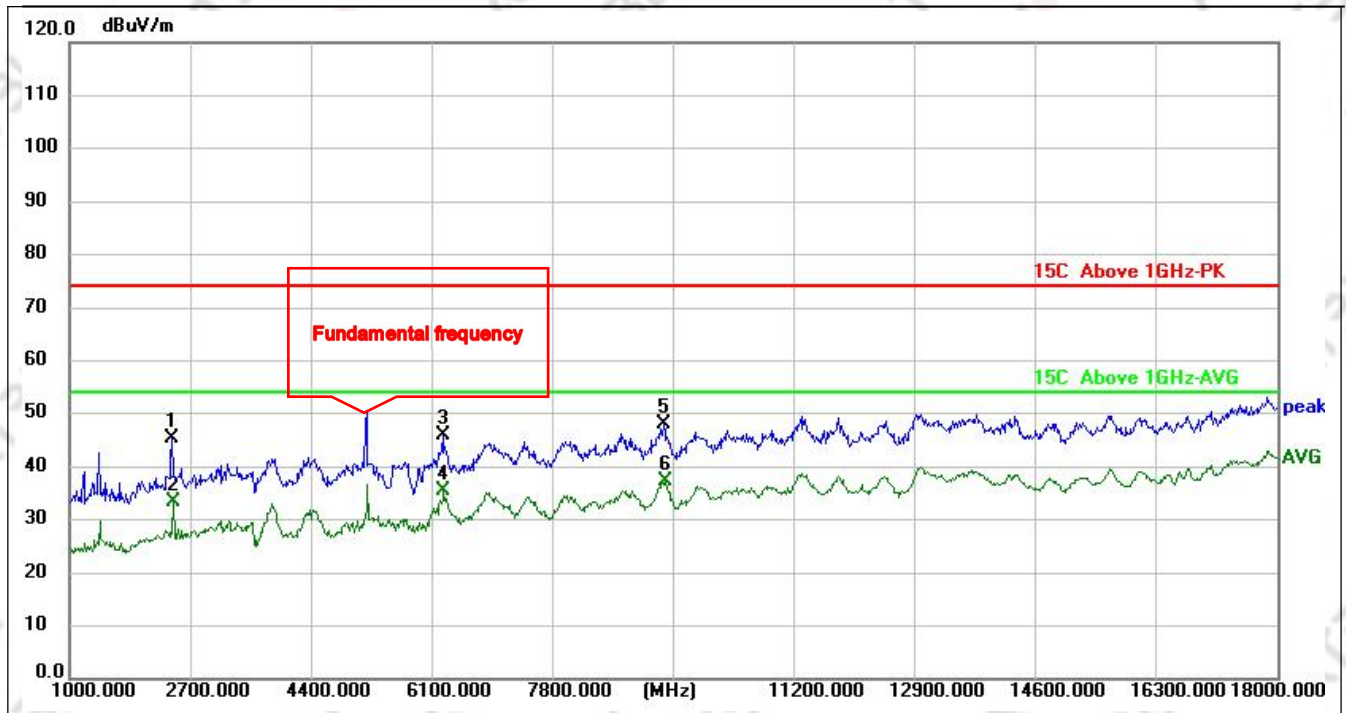

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:07:24
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH157 5785	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	60.94	-15.55	45.39	74.00	-28.61	peak	150	0	
2	2462.000	48.70	-15.44	33.26	54.00	-20.74	AVG	150	0	
3	6253.000	47.82	-1.79	46.03	74.00	-27.97	peak	150	0	
4	6270.000	37.12	-1.75	35.37	54.00	-18.63	AVG	150	0	
5	9364.000	43.93	4.03	47.96	74.00	-26.04	peak	150	0	
6 *	9381.000	33.28	4.05	37.33	54.00	-16.67	AVG	150	0	


*:Maximum data x:Over limit !:over margin

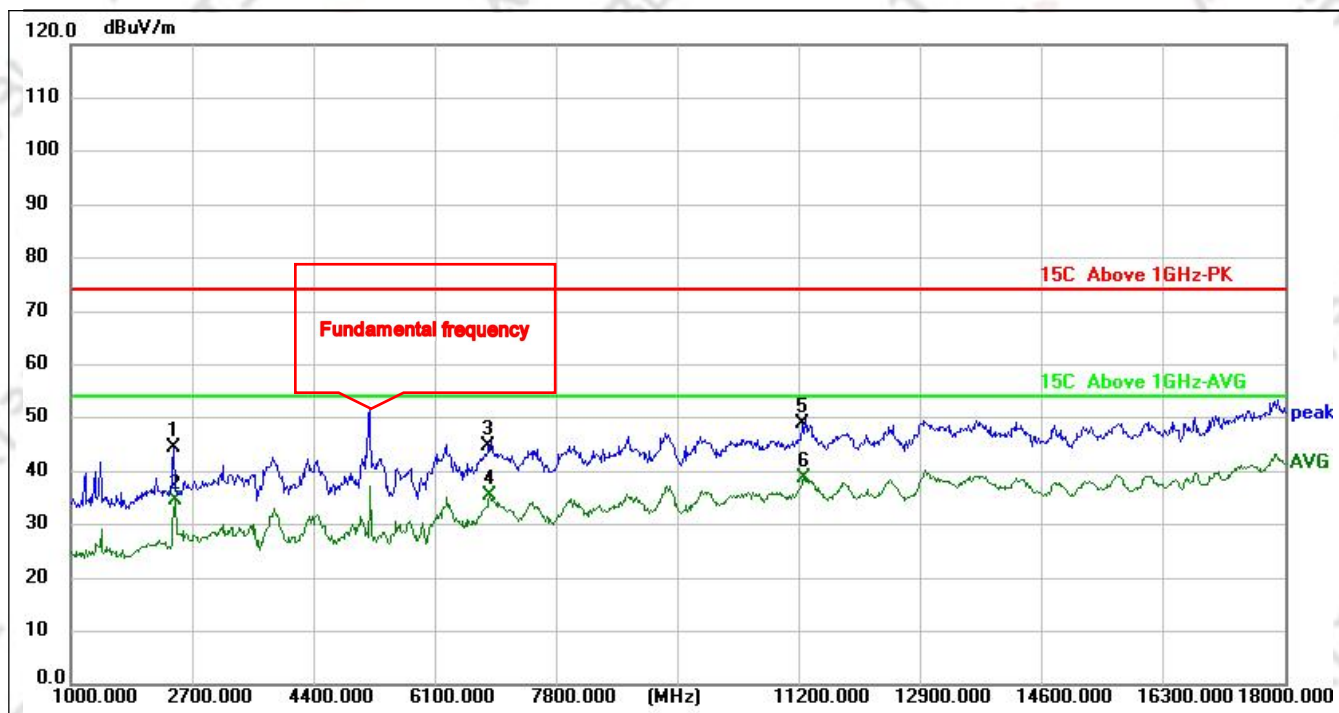

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:11:24
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH165 5825	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	59.97	-15.55	44.42	74.00	-29.58	peak	150	180	
2	2462.000	50.10	-15.44	34.66	54.00	-19.34	AVG	150	180	
3	6848.000	45.12	-0.47	44.65	74.00	-29.35	peak	150	180	
4	6865.000	35.76	-0.44	35.32	54.00	-18.68	AVG	150	180	
5	11251.000	41.48	7.45	48.93	74.00	-25.07	peak	150	180	
6 *	11268.000	31.35	7.48	38.83	54.00	-15.17	AVG	150	180	


*:Maximum data x:Over limit !:over margin

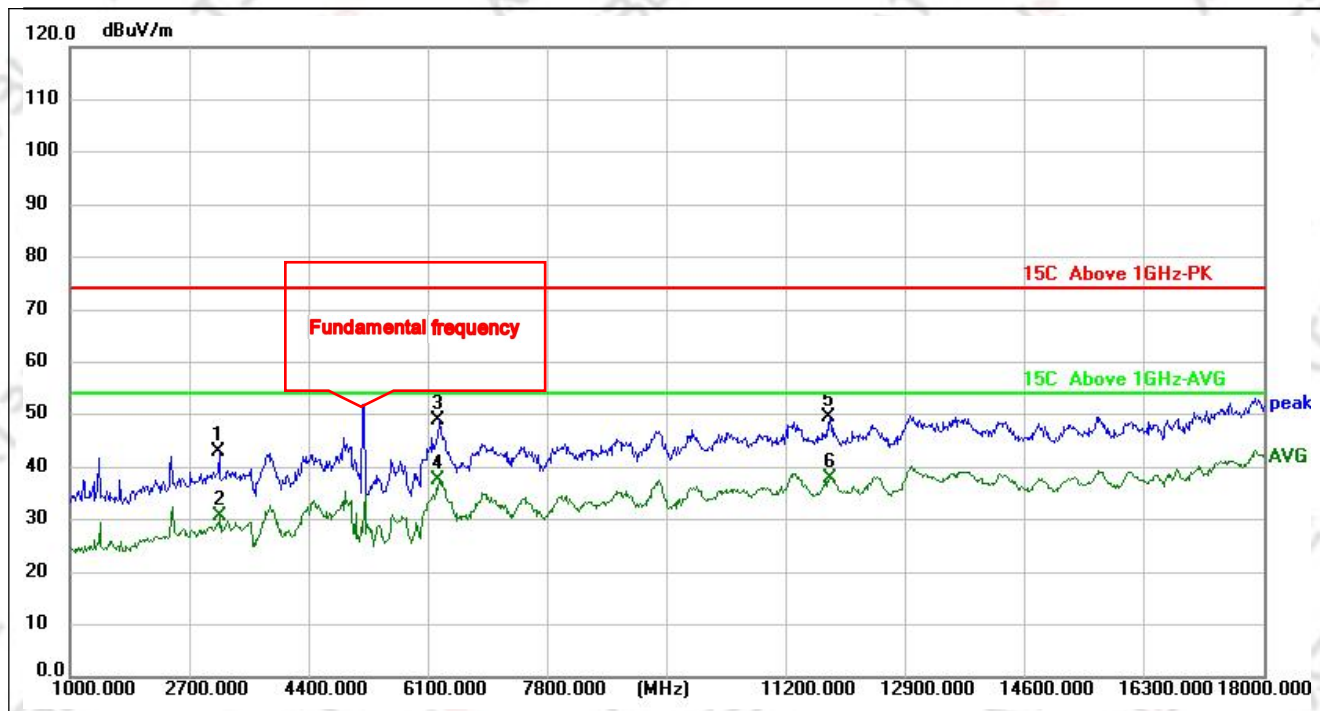

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:13:39
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE20_CH165 5825	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3125.000	55.00	-12.01	42.99	74.00	-31.01	peak	150	0	
2	3142.000	42.58	-11.96	30.62	54.00	-23.38	AVG	150	0	
3	6253.000	50.72	-1.79	48.93	74.00	-25.07	peak	150	0	
4	6253.000	39.29	-1.79	37.50	54.00	-16.50	AVG	150	0	
5	11812.000	41.42	8.19	49.61	74.00	-24.39	peak	150	0	
6 *	11829.000	29.56	8.20	37.76	54.00	-16.24	AVG	150	0	


*:Maximum data x:Over limit !:over margin

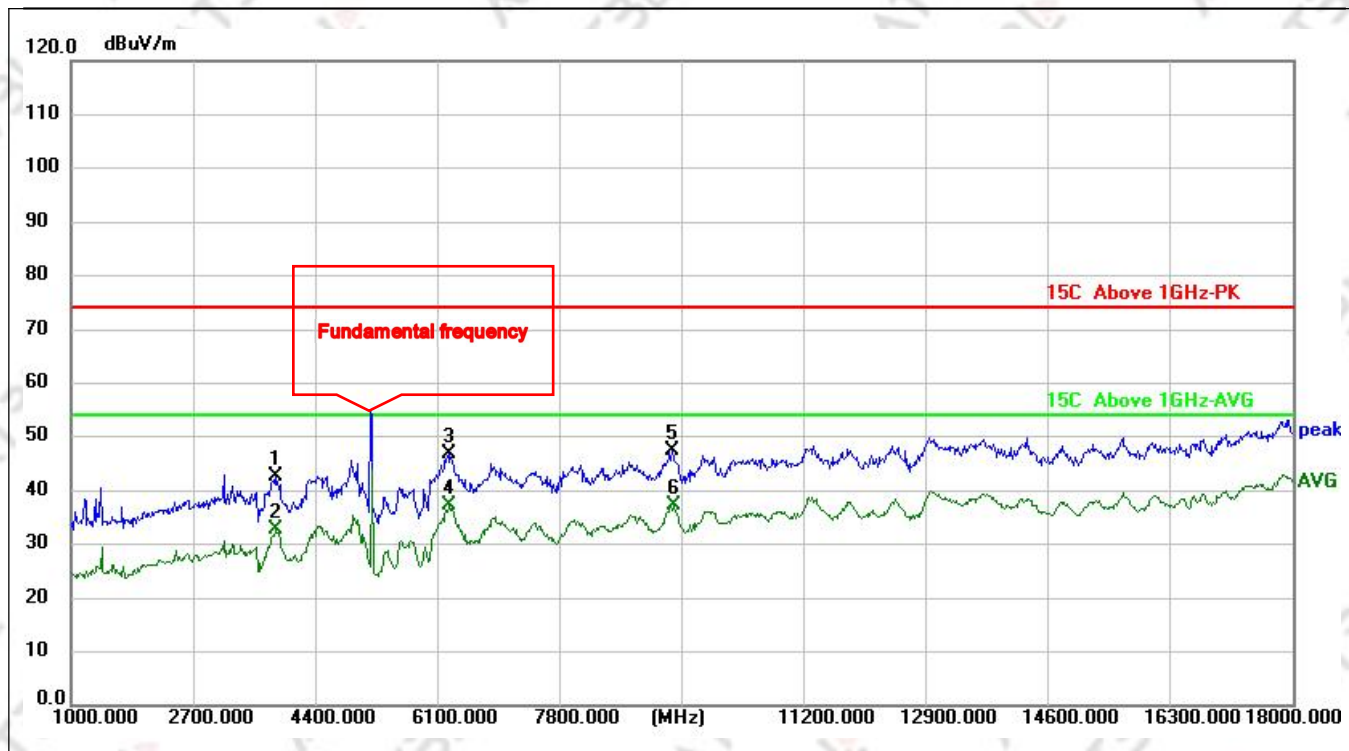

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:15:50
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH38 5190	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3839.000	52.08	-9.30	42.78	74.00	-31.22	peak	150	180	
2	3856.000	41.99	-9.26	32.73	54.00	-21.27	AVG	150	180	
3	6253.000	48.51	-1.79	46.72	74.00	-27.28	peak	150	180	
4	6270.000	39.07	-1.75	37.32	54.00	-16.68	AVG	150	180	
5	9364.000	43.53	4.03	47.56	74.00	-26.44	peak	150	180	
6 *	9381.000	33.31	4.05	37.36	54.00	-16.64	AVG	150	180	


*:Maximum data x:Over limit !:over margin

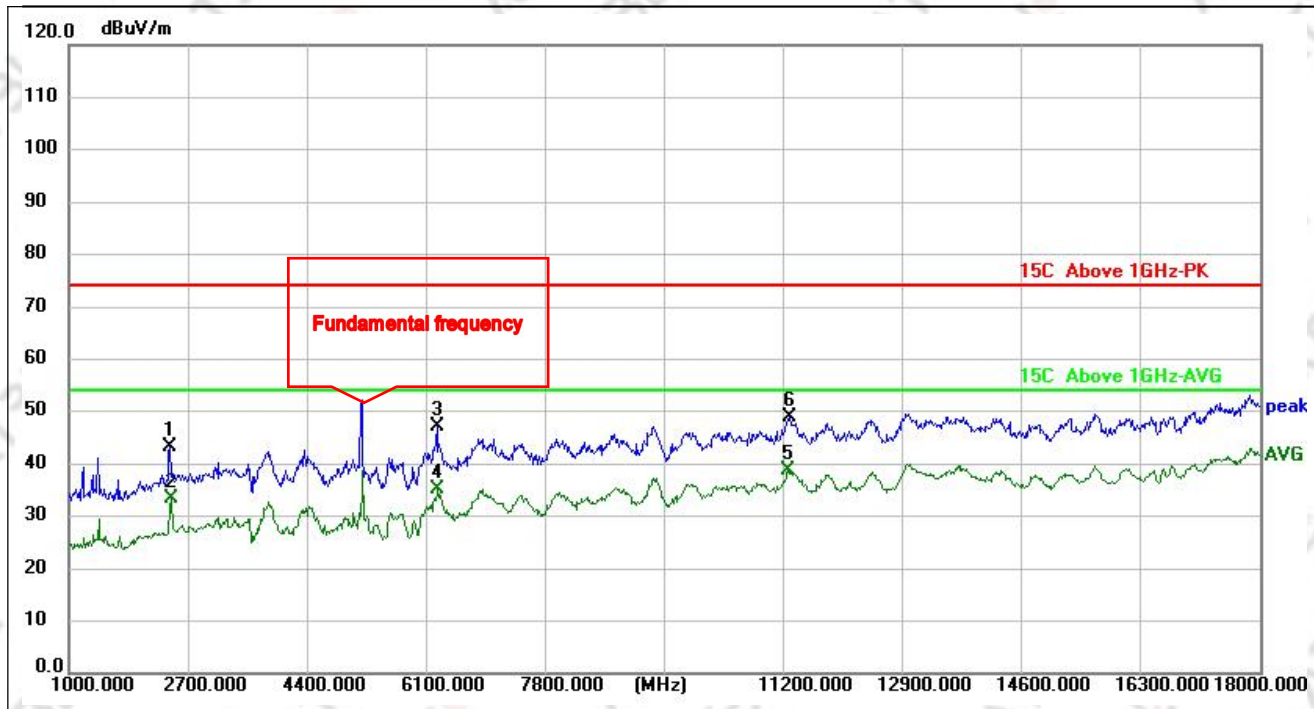

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:17:17
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH38 5190	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	58.75	-15.55	43.20	74.00	-30.80	peak	150	0	
2	2462.000	48.90	-15.44	33.46	54.00	-20.54	AVG	150	0	
3	6253.000	48.81	-1.79	47.02	74.00	-26.98	peak	150	0	
4	6270.000	36.79	-1.75	35.04	54.00	-18.96	AVG	150	0	
5 *	11268.000	31.26	7.48	38.74	54.00	-15.26	AVG	150	0	
6	11285.000	41.41	7.53	48.94	74.00	-25.06	peak	150	0	


*:Maximum data x:Over limit !:over margin

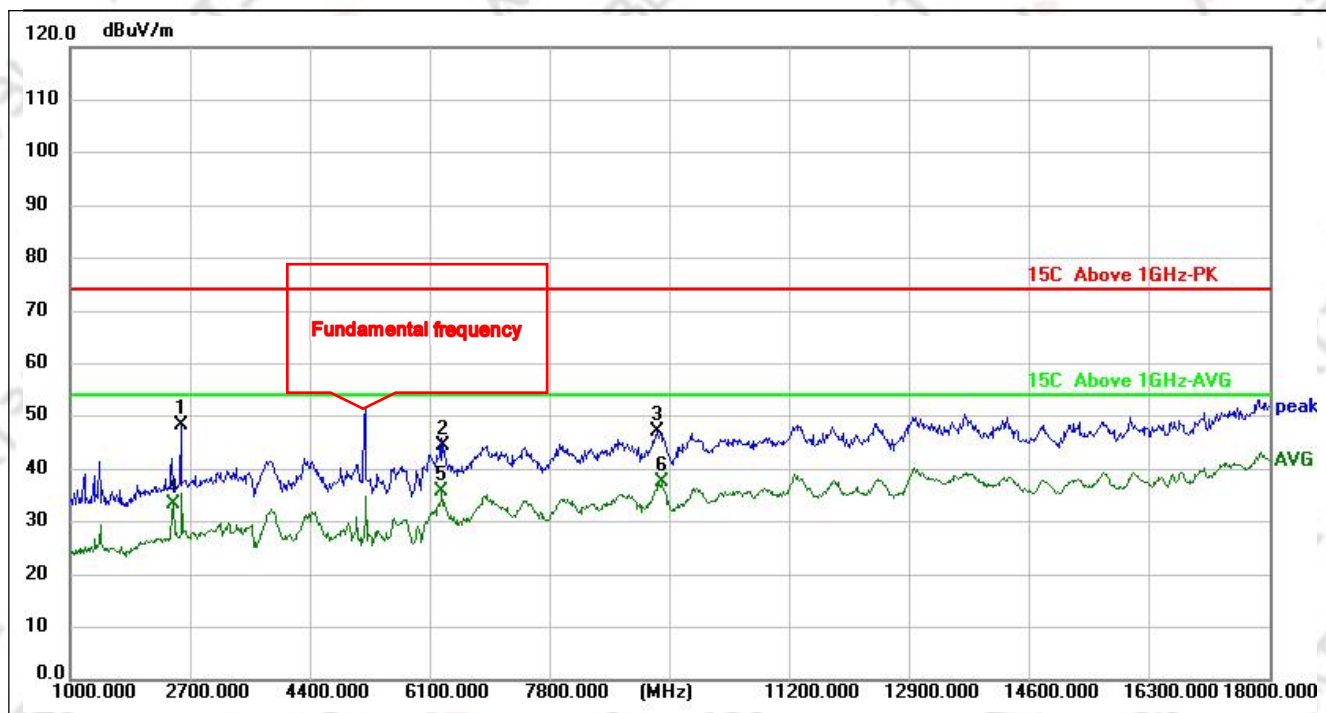

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:18:49
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH46 5230	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2564.000	63.20	-14.76	48.44	74.00	-25.56	peak	150	180	
2	6287.000	46.12	-1.70	44.42	74.00	-29.58	peak	150	180	
3	9313.000	43.03	3.97	47.00	74.00	-27.00	peak	150	180	
4	2462.000	48.71	-15.44	33.27	54.00	-20.73	AVG	150	180	
5	6270.000	37.43	-1.75	35.68	54.00	-18.32	AVG	150	180	
6 *	9381.000	33.41	4.05	37.46	54.00	-16.54	AVG	150	180	


*:Maximum data x:Over limit !:over margin

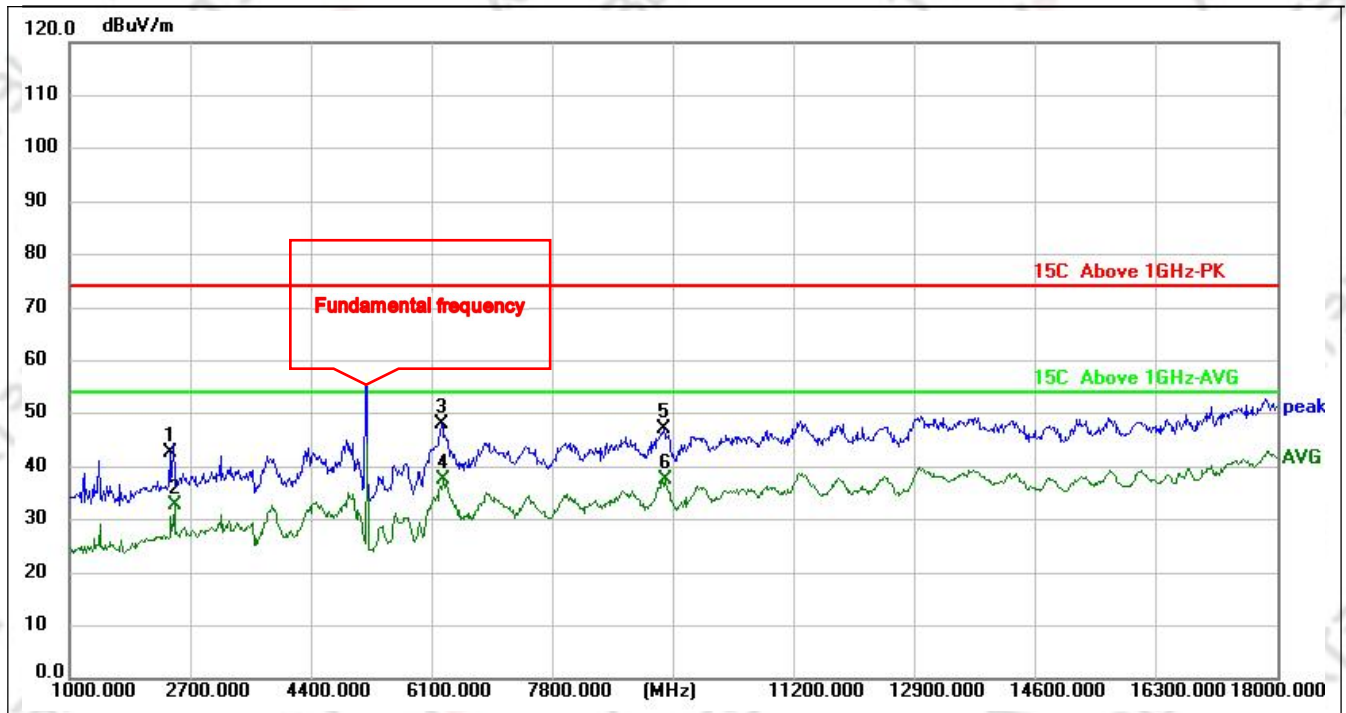

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:20:25
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH46 5230	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2411.000	58.55	-15.78	42.77	74.00	-31.23	peak	150	0	
2	2479.000	47.95	-15.32	32.63	54.00	-21.37	AVG	150	0	
3	6236.000	49.82	-1.84	47.98	74.00	-26.02	peak	150	0	
4 *	6270.000	39.31	-1.75	37.56	54.00	-16.44	AVG	150	0	
5	9364.000	43.02	4.03	47.05	74.00	-26.95	peak	150	0	
6	9381.000	33.38	4.05	37.43	54.00	-16.57	AVG	150	0	


*:Maximum data x:Over limit !:over margin

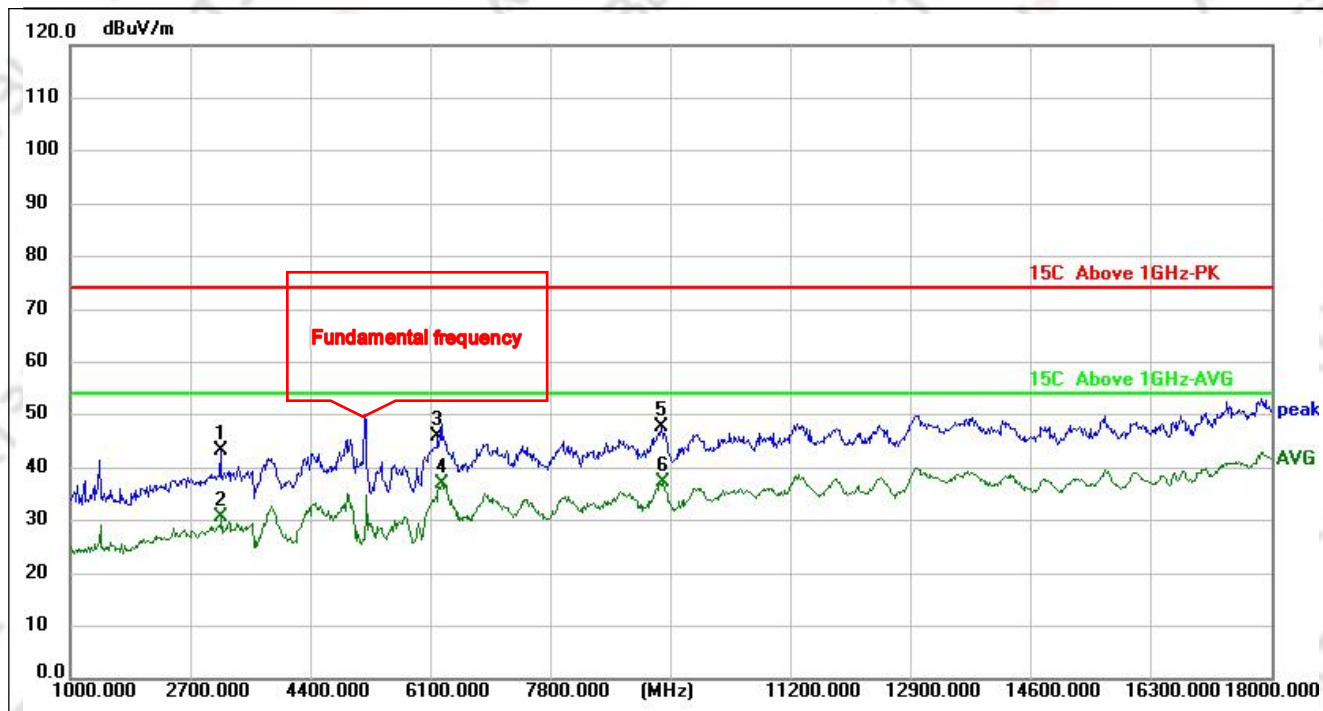

Site:		Antenna:Vertical	Temperature(°C):25(°C)
Limit:	15C Above 1GHz-PK		Humidity(%):53%
EUT:	BE3600 Router	Test Time:	2025/9/26 17:21:52
M/N.:	FX21-BE36	Power Rating:	DC12V
Mode:	5G_BE40_CH54 5270	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3125.000	55.39	-12.01	43.38	74.00	-30.62	peak	150	180	
2	3142.000	42.67	-11.96	30.71	54.00	-23.29	AVG	150	180	
3	6202.000	47.82	-1.94	45.88	74.00	-28.12	peak	150	180	
4	6253.000	38.88	-1.79	37.09	54.00	-16.91	AVG	150	180	
5	9364.000	43.77	4.03	47.80	74.00	-26.20	peak	150	180	
6 *	9381.000	33.25	4.05	37.30	54.00	-16.70	AVG	150	180	


*:Maximum data x:Over limit !:over margin

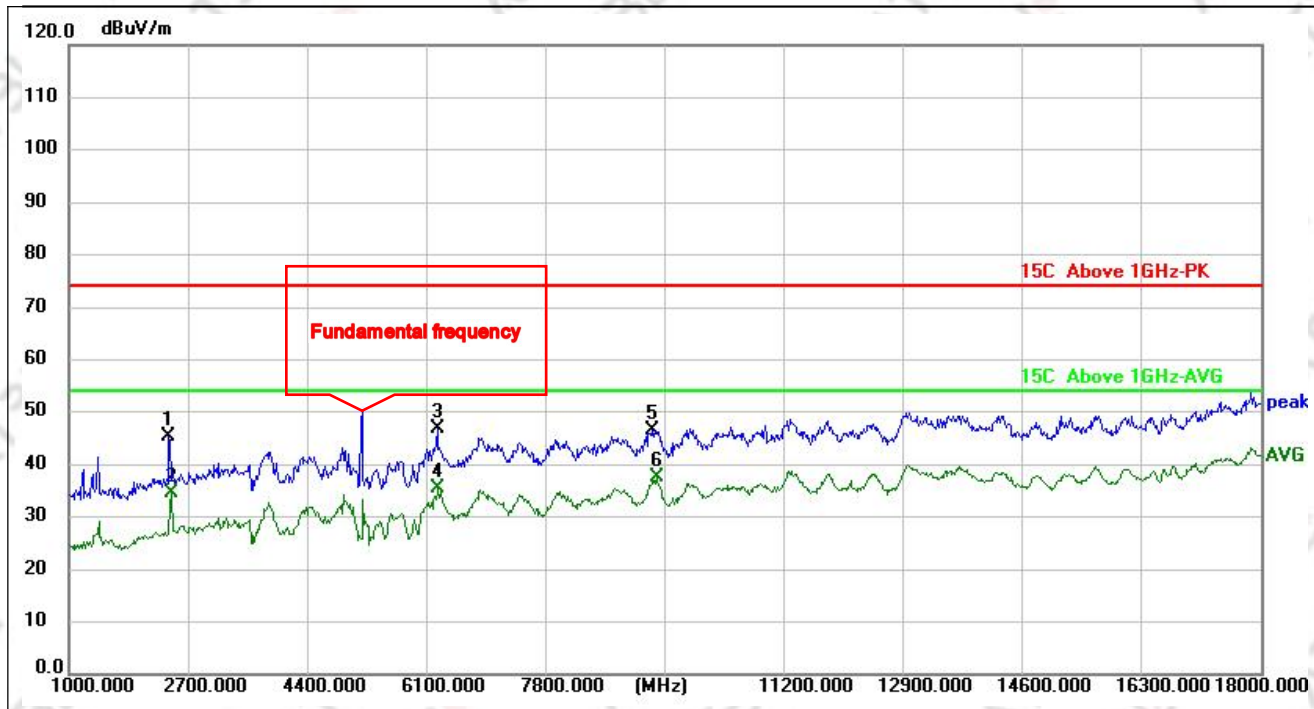

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:23:31
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH54 5270	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2428.000	60.95	-15.67	45.28	74.00	-28.72	peak	150	0	
2	2462.000	49.99	-15.44	34.55	54.00	-19.45	AVG	150	0	
3	6253.000	48.55	-1.79	46.76	74.00	-27.24	peak	150	0	
4	6270.000	37.31	-1.75	35.56	54.00	-18.44	AVG	150	0	
5	9313.000	42.70	3.97	46.67	74.00	-27.33	peak	150	0	
6 *	9381.000	33.50	4.05	37.55	54.00	-16.45	AVG	150	0	


*:Maximum data x:Over limit !:over margin

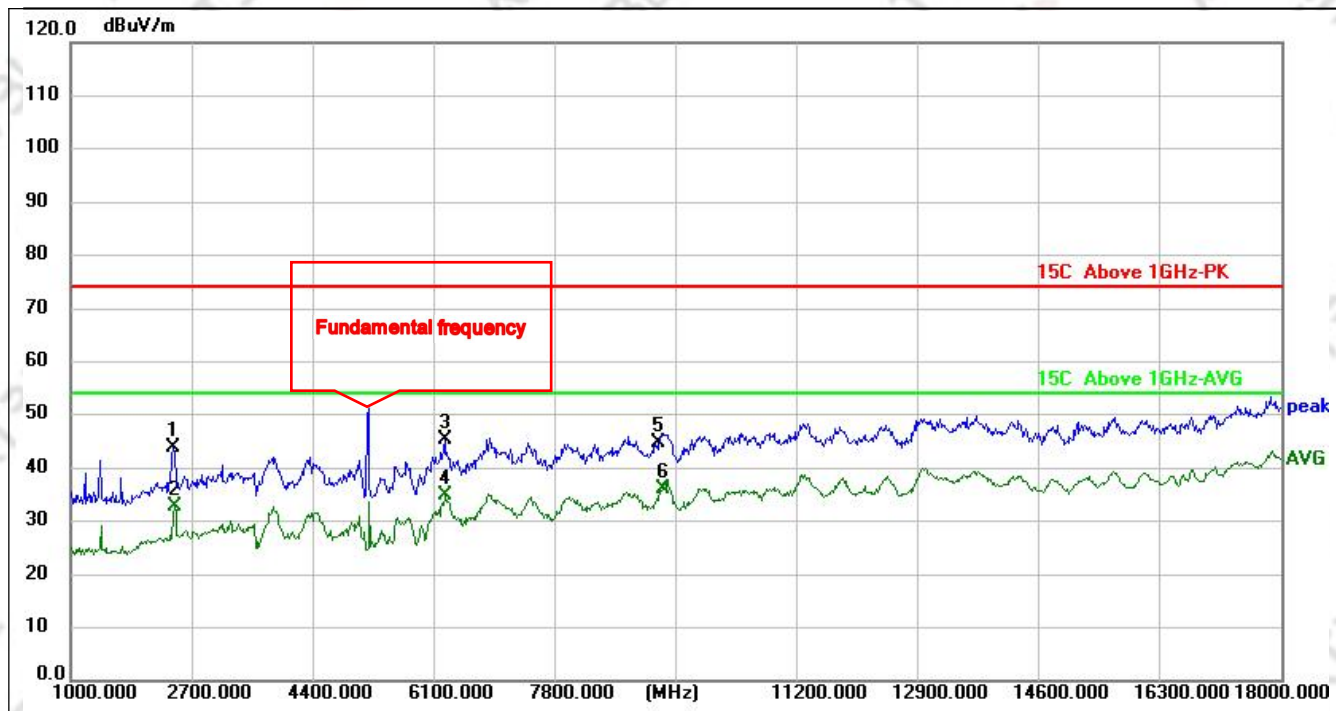

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:25:03
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH62 5310	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	59.47	-15.55	43.92	74.00	-30.08	peak	150	180	
2	2462.000	48.28	-15.44	32.84	54.00	-21.16	AVG	150	180	
3	6253.000	47.18	-1.79	45.39	74.00	-28.61	peak	150	180	
4	6270.000	36.52	-1.75	34.77	54.00	-19.23	AVG	150	180	
5	9262.000	40.88	3.92	44.80	74.00	-29.20	peak	150	180	
6 *	9313.000	32.05	3.97	36.02	54.00	-17.98	AVG	150	180	


*:Maximum data x:Over limit !:over margin

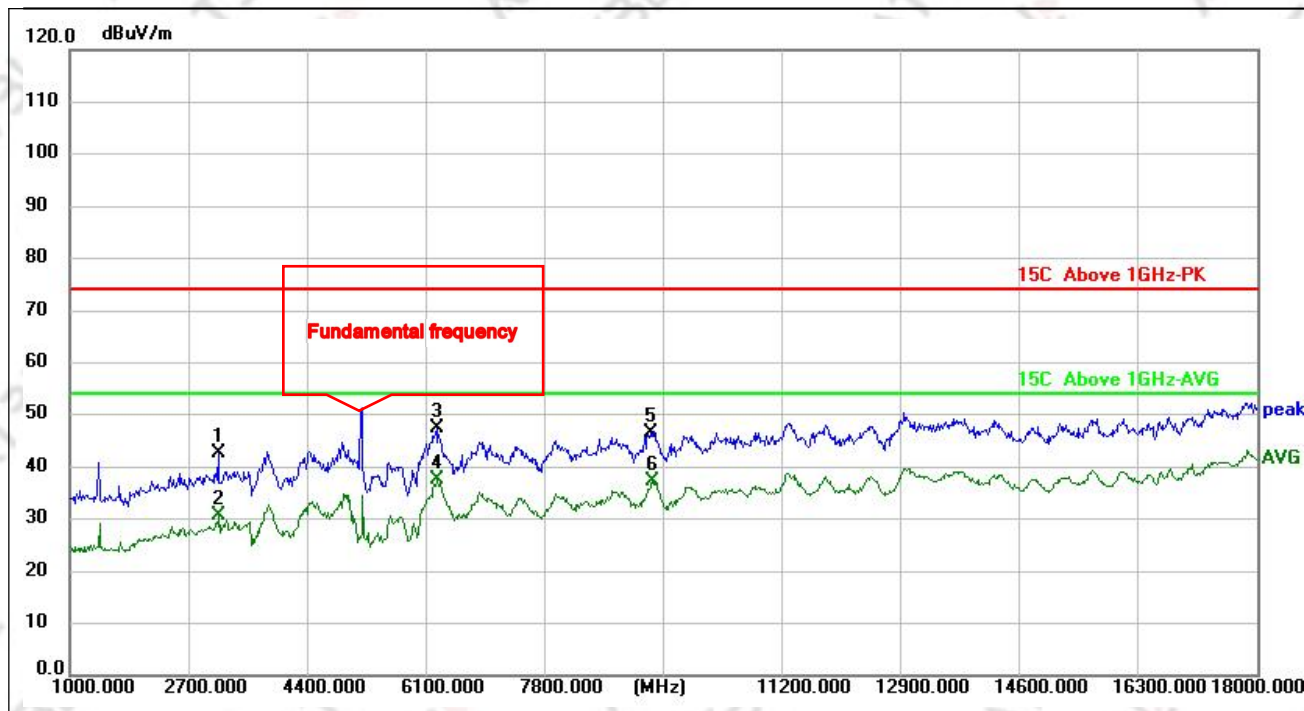

Site:		Antenna:Vertical	Temperature(°C):25(°C)
Limit:	15C Above 1GHz-PK		Humidity(%):53%
EUT:	BE3600 Router	Test Time:	2025/9/26 17:26:17
M/N.:	FX21-BE36	Power Rating:	DC12V
Mode:	5G_BE40_CH62 5310	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3125.000	54.78	-12.01	42.77	74.00	-31.23	peak	150	0	
2	3142.000	42.60	-11.96	30.64	54.00	-23.36	AVG	150	0	
3	6253.000	49.25	-1.79	47.46	74.00	-26.54	peak	150	0	
4 *	6270.000	39.18	-1.75	37.43	54.00	-16.57	AVG	150	0	
5	9313.000	42.58	3.97	46.55	74.00	-27.45	peak	150	0	
6	9347.000	33.22	4.02	37.24	54.00	-16.76	AVG	150	0	


*:Maximum data x:Over limit !:over margin

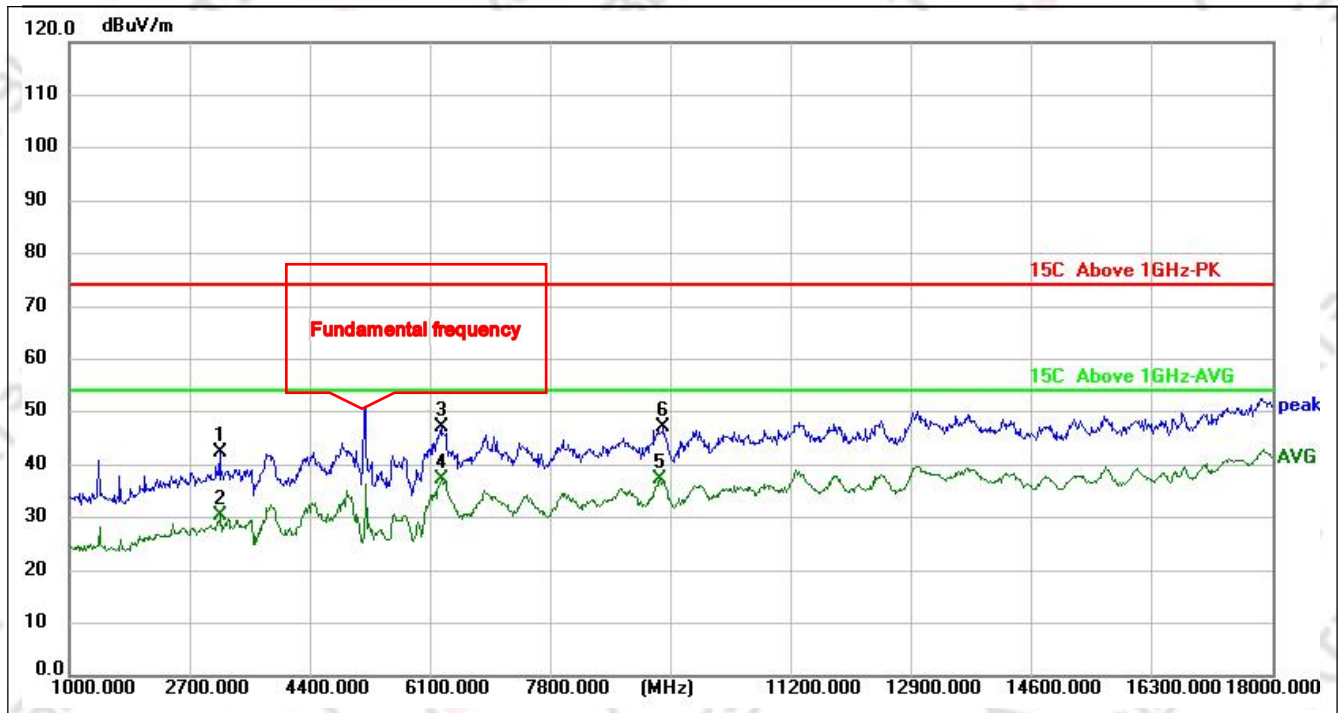

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:27:38
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH102 5510	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3125.000	54.46	-12.01	42.45	74.00	-31.55	peak	150	180	
2	3142.000	42.47	-11.96	30.51	54.00	-23.49	AVG	150	180	
3	6253.000	48.93	-1.79	47.14	74.00	-26.86	peak	150	180	
4 *	6270.000	39.12	-1.75	37.37	54.00	-16.63	AVG	150	180	
5	9347.000	33.30	4.02	37.32	54.00	-16.68	AVG	150	180	
6	9398.000	42.98	4.08	47.06	74.00	-26.94	peak	150	180	


*:Maximum data x:Over limit !:over margin

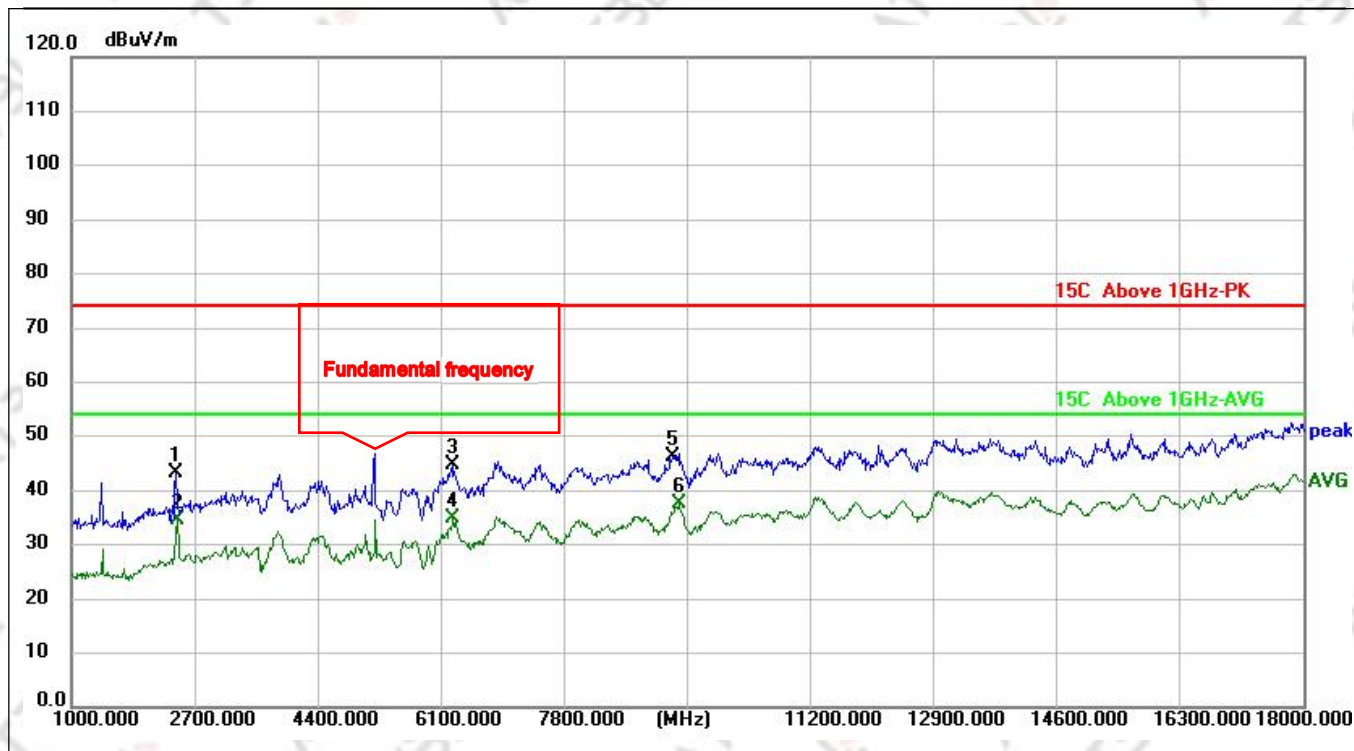

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:28:57
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH102 5510	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	58.74	-15.55	43.19	74.00	-30.81	peak	150	0	
2	2462.000	49.93	-15.44	34.49	54.00	-19.51	AVG	150	0	
3	6253.000	46.64	-1.79	44.85	74.00	-29.15	peak	150	0	
4	6270.000	36.72	-1.75	34.97	54.00	-19.03	AVG	150	0	
5	9296.000	42.18	3.96	46.14	74.00	-27.86	peak	150	0	
6 *	9381.000	33.41	4.05	37.46	54.00	-16.54	AVG	150	0	


*:Maximum data x:Over limit !:over margin

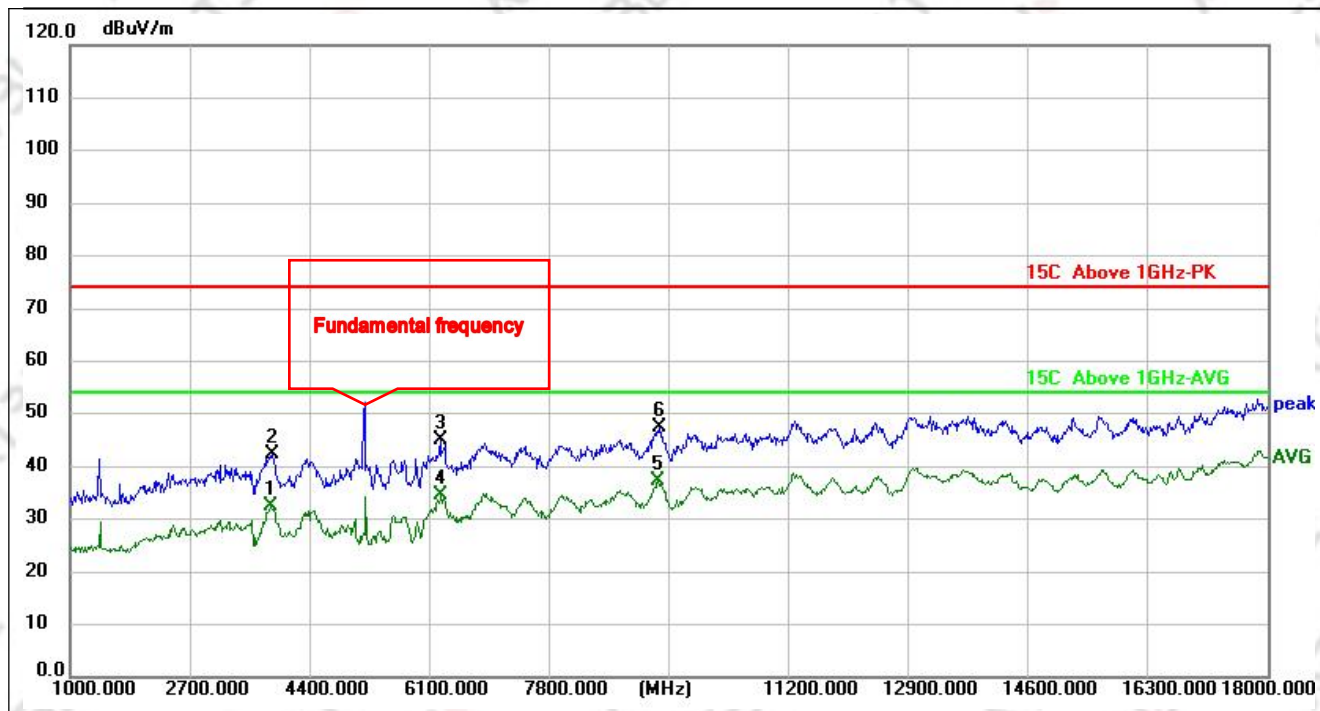

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:30:28
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH110 5550	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3839.000	41.72	-9.30	32.42	54.00	-21.58	AVG	150	180	
2	3873.000	51.63	-9.21	42.42	74.00	-31.58	peak	150	180	
3	6253.000	46.72	-1.79	44.93	74.00	-29.07	peak	150	180	
4	6270.000	36.38	-1.75	34.63	54.00	-19.37	AVG	150	180	
5 *	9347.000	33.29	4.02	37.31	54.00	-16.69	AVG	150	180	
6	9364.000	43.37	4.03	47.40	74.00	-26.60	peak	150	180	


*:Maximum data x:Over limit !:over margin

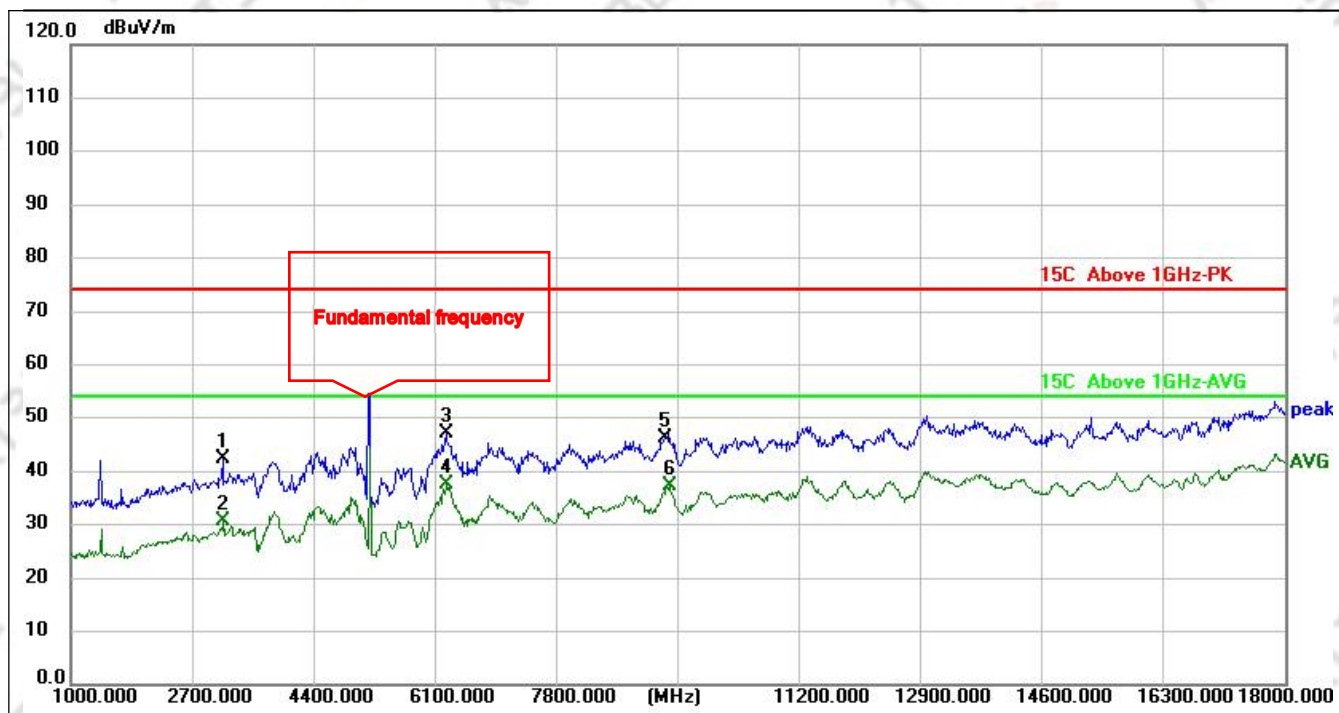

Site:		Antenna:Vertical	Temperature(°C):25(°C)
Limit:	15C Above 1GHz-PK		Humidity(%):53%
EUT:	BE3600 Router	Test Time:	2025/9/26 17:31:57
M/N.:	FX21-BE36	Power Rating:	DC12V
Mode:	5G_BE40_CH110 5550	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3125.000	54.26	-12.01	42.25	74.00	-31.75	peak	150	0	
2	3142.000	42.59	-11.96	30.63	54.00	-23.37	AVG	150	0	
3	6253.000	48.99	-1.79	47.20	74.00	-26.80	peak	150	0	
4 *	6270.000	39.33	-1.75	37.58	54.00	-16.42	AVG	150	0	
5	9330.000	42.20	3.99	46.19	74.00	-27.81	peak	150	0	
6	9381.000	33.27	4.05	37.32	54.00	-16.68	AVG	150	0	


*:Maximum data x:Over limit !:over margin

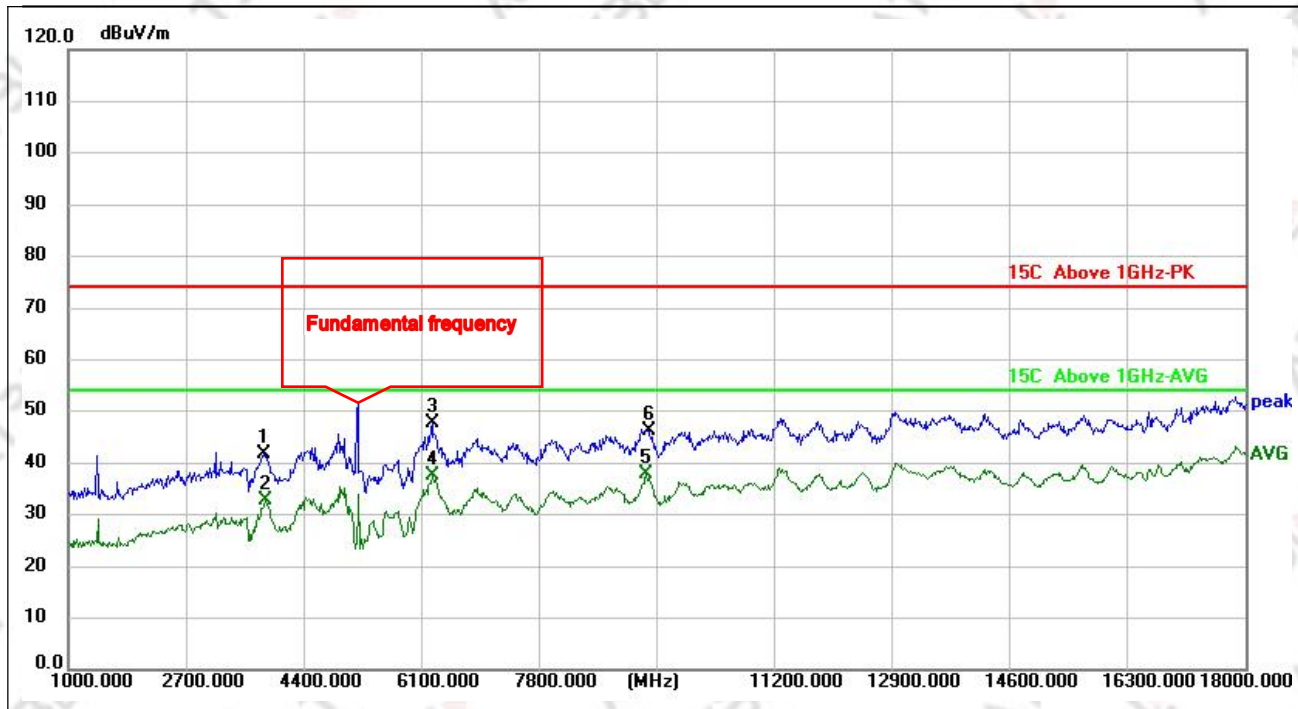

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:33:04
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH134 5670	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3822.000	51.17	-9.35	41.82	74.00	-32.18	peak	150	180	
2	3856.000	41.93	-9.26	32.67	54.00	-21.33	AVG	150	180	
3	6253.000	49.60	-1.79	47.81	74.00	-26.19	peak	150	180	
4	6253.000	39.24	-1.79	37.45	54.00	-16.55	AVG	150	180	
5 *	9347.000	33.80	4.02	37.82	54.00	-16.18	AVG	150	180	
6	9381.000	42.09	4.05	46.14	74.00	-27.86	peak	150	180	


*:Maximum data x:Over limit !:over margin

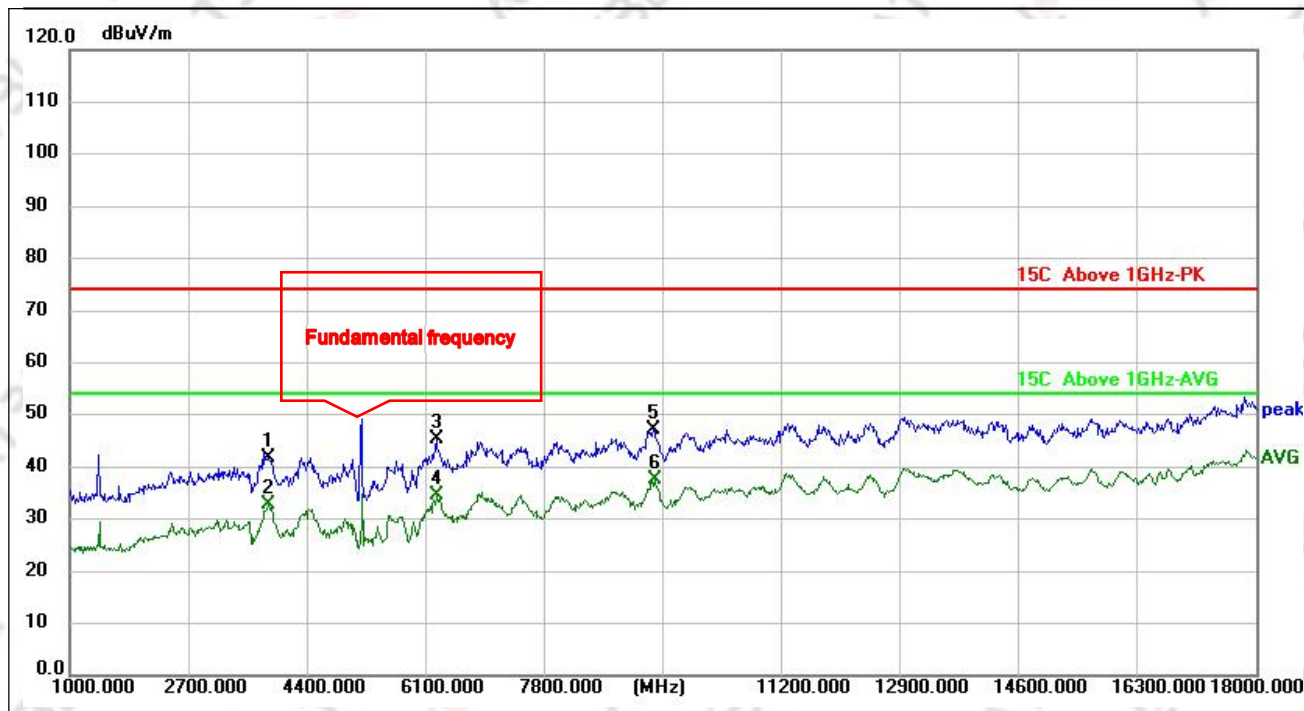

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:34:37
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH134 5670	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3839.000	51.06	-9.30	41.76	74.00	-32.24	peak	150	0	
2	3856.000	42.15	-9.26	32.89	54.00	-21.11	AVG	150	0	
3	6253.000	47.22	-1.79	45.43	74.00	-28.57	peak	150	0	
4	6270.000	36.46	-1.75	34.71	54.00	-19.29	AVG	150	0	
5	9364.000	43.23	4.03	47.26	74.00	-26.74	peak	150	0	
6 *	9381.000	33.37	4.05	37.42	54.00	-16.58	AVG	150	0	


*:Maximum data x:Over limit !:over margin

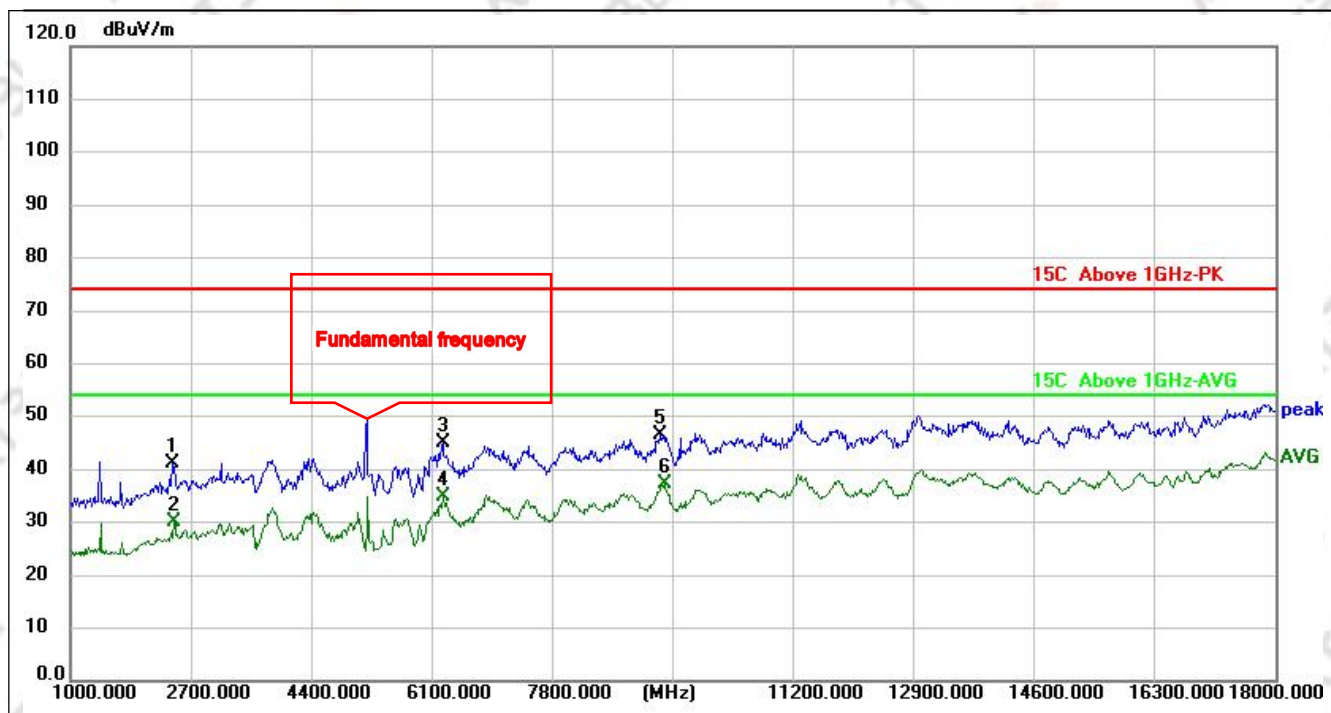

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:36:03
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH151 5755	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2445.000	56.63	-15.55	41.08	74.00	-32.92	peak	150	180	
2	2462.000	45.51	-15.44	30.07	54.00	-23.93	AVG	150	180	
3	6253.000	46.68	-1.79	44.89	74.00	-29.11	peak	150	180	
4	6270.000	36.62	-1.75	34.87	54.00	-19.13	AVG	150	180	
5	9313.000	42.45	3.97	46.42	74.00	-27.58	peak	150	180	
6 *	9381.000	33.14	4.05	37.19	54.00	-16.81	AVG	150	180	


*:Maximum data x:Over limit !:over margin

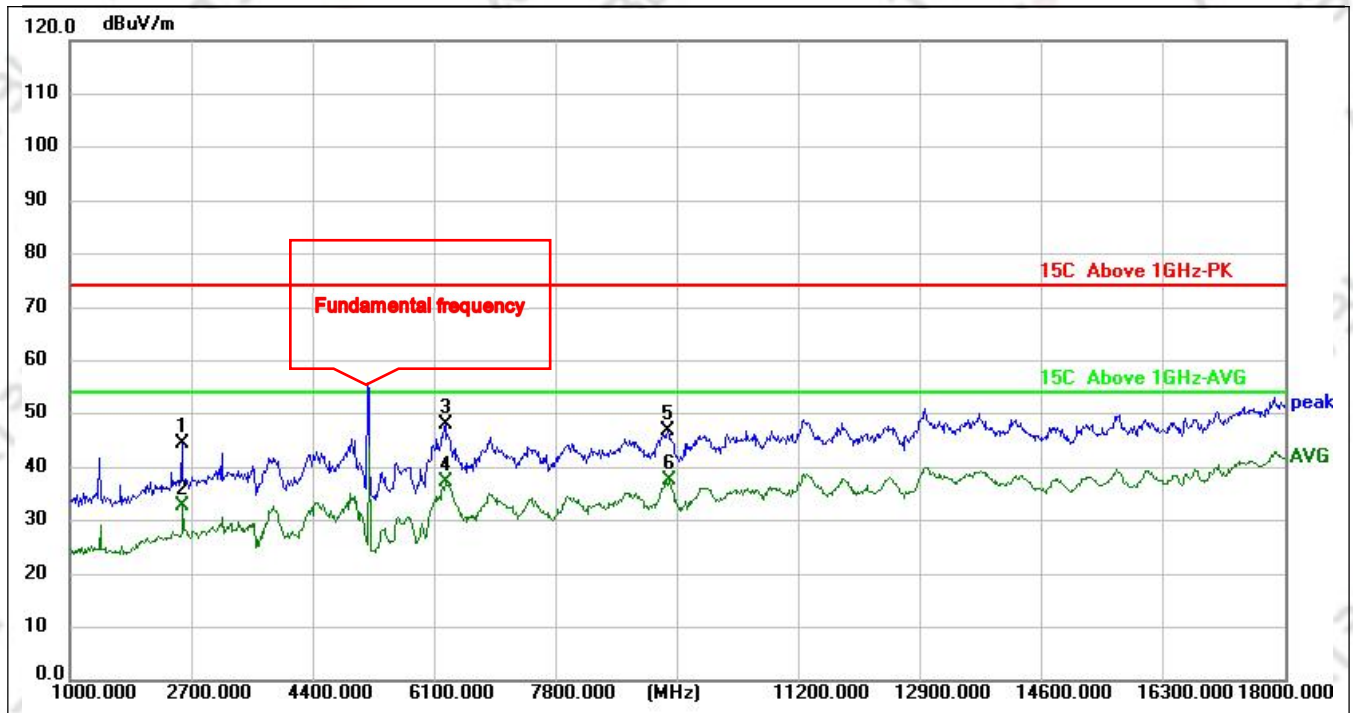

Site:	Antenna:Vertical	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:37:26
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH151 5755	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	2564.000	59.28	-14.76	44.52	74.00	-29.48	peak	150	0	
2	2581.000	47.27	-14.65	32.62	54.00	-21.38	AVG	150	0	
3	6253.000	49.71	-1.79	47.92	74.00	-26.08	peak	150	0	
4	6270.000	39.01	-1.75	37.26	54.00	-16.74	AVG	150	0	
5	9364.000	42.68	4.03	46.71	74.00	-27.29	peak	150	0	
6 *	9381.000	33.55	4.05	37.60	54.00	-16.40	AVG	150	0	


*:Maximum data x:Over limit !:over margin

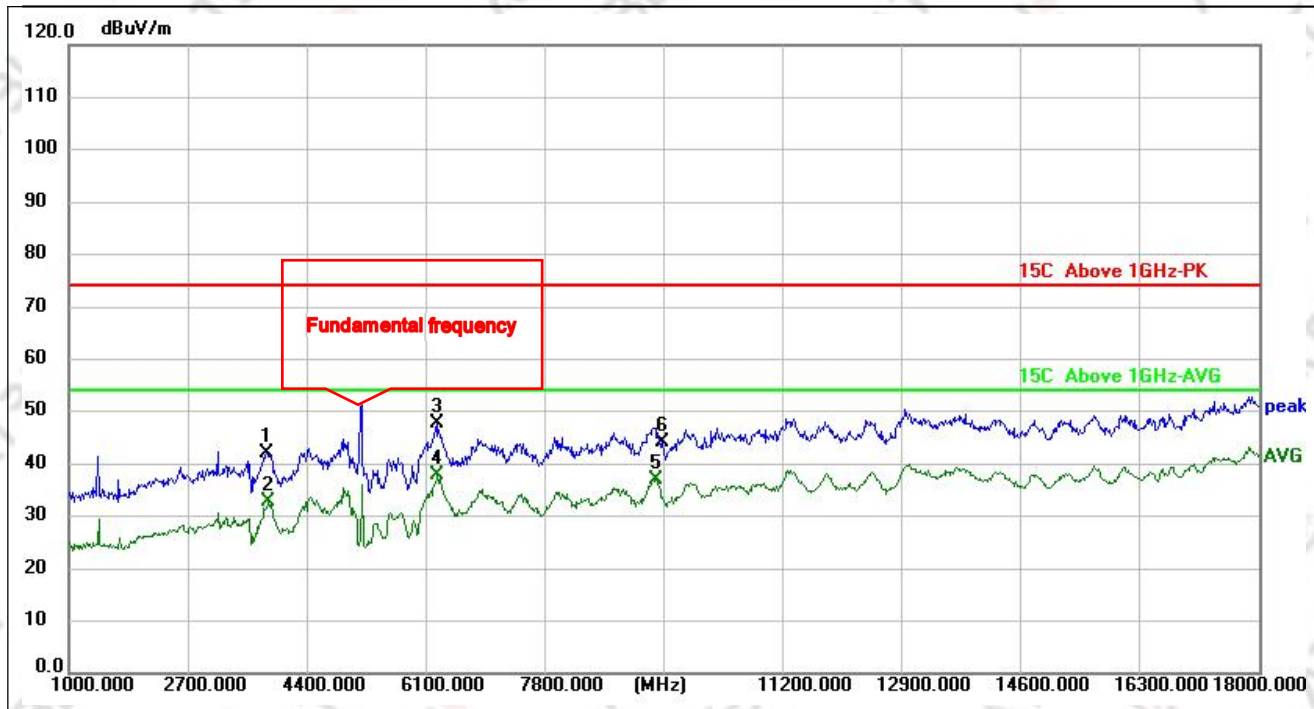

Site:		Antenna:Vertical	Temperature(°C):25(°C)
Limit:	15C Above 1GHz-PK		Humidity(%):53%
EUT:	BE3600 Router	Test Time:	2025/9/26 17:38:43
M/N.:	FX21-BE36	Power Rating:	DC12V
Mode:	5G_BE40_CH159 5795	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3822.000	51.45	-9.35	42.10	74.00	-31.90	peak	150	180	
2	3856.000	42.06	-9.26	32.80	54.00	-21.20	AVG	150	180	
3	6253.000	49.50	-1.79	47.71	74.00	-26.29	peak	150	180	
4 *	6270.000	39.48	-1.75	37.73	54.00	-16.27	AVG	150	180	
5	9398.000	32.88	4.08	36.96	54.00	-17.04	AVG	150	180	
6	9483.000	39.84	4.19	44.03	74.00	-29.97	peak	150	180	

*:Maximum data x:Over limit !:over margin

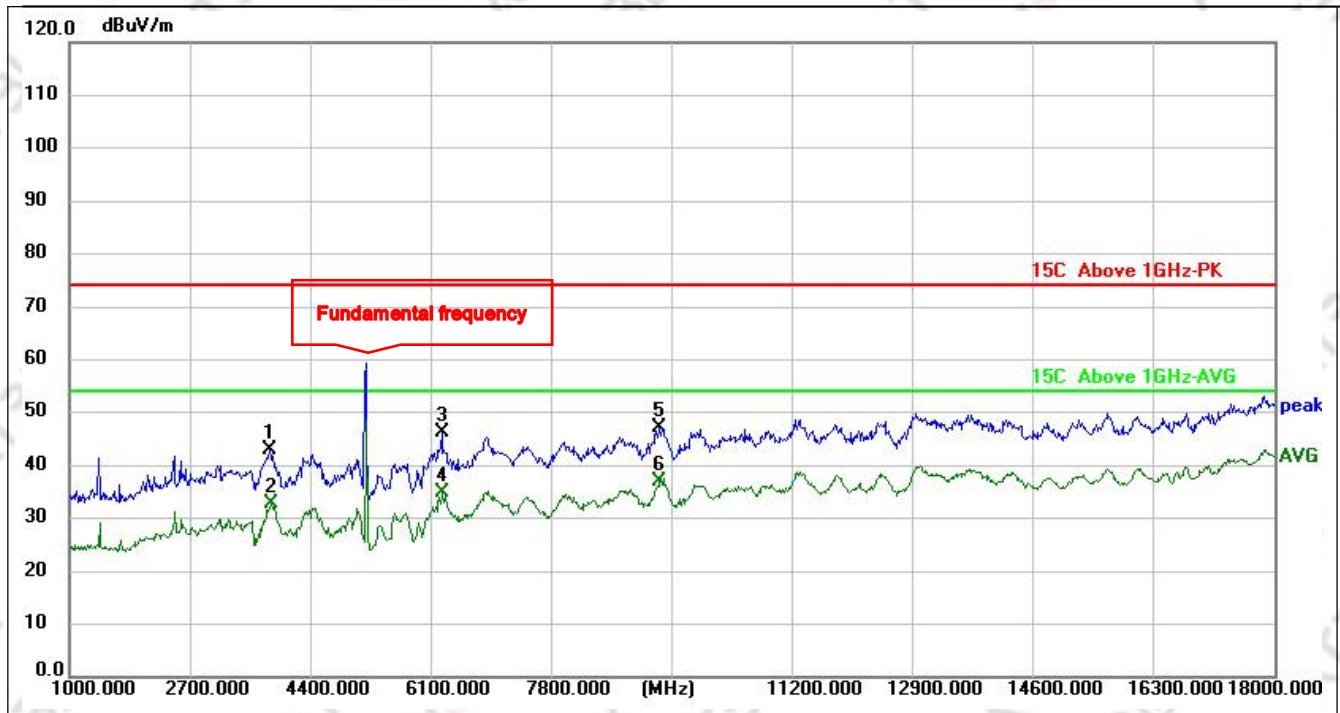

Site:	Antenna:Horizontal	Temperature(°C):25(°C)
Limit: 15C Above 1GHz-PK		Humidity(%):53%
EUT: BE3600 Router	Test Time:	2025/9/26 17:39:56
M/N.: FX21-BE36	Power Rating:	DC12V
Mode: 5G_BE40_CH159 5795	Test Engineer:	
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	3822.000	52.19	-9.35	42.84	74.00	-31.16	peak	150	0	
2	3856.000	42.02	-9.26	32.76	54.00	-21.24	AVG	150	0	
3	6253.000	48.09	-1.79	46.30	74.00	-27.70	peak	150	0	
4	6270.000	36.54	-1.75	34.79	54.00	-19.21	AVG	150	0	
5	9330.000	43.29	3.99	47.28	74.00	-26.72	peak	150	0	
6 *	9330.000	33.10	3.99	37.09	54.00	-16.91	AVG	150	0	

*:Maximum data x:Over limit !:over margin